

FCC SAR Test Report

APPLICANT : Zebra Technologies Corporation
EQUIPMENT : Enterprise Tablet
BRAND NAME : Zebra
MODEL NAME : ET4015A
FCC ID : UZ7ET4015A
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
5. Smart Transmit feature for RF Exposure compliance.....	8
6. Proximity Sensor Triggering Test.....	10
7. RF Exposure Limits.....	20
7.1 Uncontrolled Environment.....	20
7.2 Controlled Environment.....	20
7.3 RF Exposure limit for above 6GHz	21
8. Specific Absorption Rate (SAR).....	22
8.1 Introduction	22
8.2 SAR Definition.....	22
9. System Description and Setup	23
9.1 E-Field Probe	24
9.2 Data Acquisition Electronics (DAE)	24
9.3 Phantom.....	25
9.4 Device Holder.....	26
10. Measurement Procedures	27
10.1 Spatial Peak SAR Evaluation.....	27
10.2 Power Reference Measurement.....	28
10.3 Area Scan	28
10.4 Zoom Scan.....	29
10.5 Volume Scan Procedures.....	29
10.6 Power Drift Monitoring.....	29
11. Test Equipment List.....	30
12. System Verification	31
12.1 Tissue Simulating Liquids.....	31
12.2 Tissue Verification	32
12.3 System Performance Check Results.....	33
12.4 PD System Verification Results.....	34
13. RF Exposure Positions	35
13.1 SAR Testing for Tablet.....	35
13.2 Miscellaneous Testing Considerations	35
14. Conducted RF Output Power (Unit: dBm).....	36
15. Antenna Location	80
16. SAR Test Results	82
16.1 Body SAR	84
16.2 6GHz PD Test Result	86
16.3 Repeated SAR Measurement	87
17. Simultaneous Transmission Analysis	88
17.1 Qualcomm Smart Transmit Simultaneous Transmission Guidance.....	89
17.2 Body Exposure Conditions	90
17.3 SPLSR Evaluation and Analysis.....	91
18. Uncertainty Assessment	92
19. References.....	95
Appendix	96
Appendix A. Plots of System Performance Check	96
Appendix B. Plots of High SAR Measurement	96
Appendix C. DASY Calibration Certificate.....	96
Appendix D. Test Setup Photos.....	96

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA551202-09	Rev. 01	Initial issue of report	Mar. 02, 2026
FA551202-09	Rev. 02	Updated WLAN 2.4GHz at Ant6/7 DSI3 Plimit and relevant data in section 5 and section 16. This report is an updated version, replacing the report issued on Mar. 02, 2026.	Apr. 03, 2026

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Enterprise Tablet, ET4015A**, are as follows.

Highest 1g SAR Summary				
Equipment Class	Frequency Band		Body (Separation 0mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	0.98	0.98
NII		5GHz WLAN	1.01	1.55
6CD		6GHz WLAN	1.00	1.55
VLP		6GHz WLAN	0.77	1.55
DSS	Bluetooth	2.4GHz Bluetooth	0.10	0.10
DSS	RFID	RFID	1.07	1.07

Equipment Class	Frequency Band	Measured APD	Scaled PD
		Body (W/m^2)	psPD (W/m^2)
6CD	6GHz WLAN	4.93	6.53
VLP	6GHz WLAN	3.51	
Date of Testing:		2026/1/15 ~ 2026/2/18	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR04-KS, SAR07-KS, SAR01-KS	CN1257	314309

Applicant	
Company Name	Zebra Technologies Corporation
Address	3 Overlook Point, Lincolnshire, IL 60069 USA

Manufacturer	
Company Name	Zebra Technologies Corporation
Address	3 Overlook Point, Lincolnshire, IL 60069 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- IEC TR 63170:2018
- IEC 62479:2010
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Enterprise Tablet
Brand Name	Zebra
Model Name	ET4015A
FCC ID	UZ7ET4015A
S/N	253295247D0088
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII 5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII 6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII 7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII 8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz RFID: 902.75 MHz ~ 927.25 MHz
Mode	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ac/ax VHT20/HE20 WLAN 2.4GHz 802.11be EHT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax/be HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE /CS ASK/GFSK NFC: ASK RFID: ASK
HW Version	DV3
SW Version	qssi_64-userdebug 15 15-14-02.00-VG-U00-PRD-ERS-04 275 release-keys
MFD	26NOV25
EUT Stage	Identical Prototype
Remark: 1. This device does not support voice function. 2. The device supports WLAN2.4GHz MIMO CDD mode for 11b/g/n/ac/ax/be and WLAN5GHz MIMO CDD mode for 11a/n/ac/ax/be and Tx Beamforming mode for 11ax/be. 3. The device supports WIFI6GHz MIMO CDD mode for 802.11a, and support CDD & SDM & TXBF mode for 802.11ax/be. 4. The device supports 1S2T (CDD) and 2S2T (SDM) mode; 1S2T: Nss=1, MIMO 2Tx; 2S2T: Nss=2, MIMO 2Tx. 5. The device implements Proximity sensors/handheld trigger reduced power for SAR compliance at different exposure conditions (body) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about sensor detection are provided in the operational description. The device will invoke corresponding work scenarios power level base on frequency bands/antennas. 6. The device support HBS (High Band Simultaneous) function, when the device WLAN 2.4GHz and WLAN 5GHz (or WLAN 6GHz) transmit at the same time it will limit different output power for simultaneous transmission compliance. 7. RFID tested using FTM (Factory Test Mode) to perform SAR testing. 8. This device has NFC function and the NFC SAR report will be separately submitted.	

Accessories Information				
Battery	Brand Name	Zebra	Model	BT-000527
AC Adapter 1 (TYPE C Wall Charger 1)	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT 1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-0TH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT 1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-0TH
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 3 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-TN28-USBC2C-01

5. Smart Transmit feature for RF Exposure compliance

The FCC RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WLAN/BT/RFID transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window. To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) version 22.1 to enable the Smart Transmit GEN1 Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at WLAN/BT/RFID bands. It will then be used as input for Smart Transmit to control and manage RF exposure for WLAN/BT/RFID bands.

<SAR design target and uncertainty>

Item		Uncertainty dB (k=2)
Total uncertainty	RFID	1.0
	WLAN/BT	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<Plimit for supported technologies and bands (Plimit in EFS file)>

Band	Antenna	Sensor on DSI3	Sensor off DSI0	Pmax*
WLAN2.4GHz	Ant 6	14.5	20.5	20.5
WLAN2.4GHz	Ant 7	14.5	21.5	21.5
WLAN2.4GHz	Ant 6+7	14.5	20.5	24.0
Bluetooth	Ant 6	6.0	6.0	6.0
Bluetooth	Ant 7	5.5	5.5	5.5
WLAN5.2GHz	Ant 6	8.5	18.0	18.0
WLAN5.2GHz	Ant 7	14.0	18.0	18.0
WLAN5.2GHz	Ant 6+7	8.5	18.0	21.0
WLAN5.3GHz	Ant 6	7.0	18.5	18.5
WLAN5.3GHz	Ant 7	11.0	18.0	18.0
WLAN5.3GHz	Ant 6+7	7.0	18.0	21.0
WLAN5.5GHz	Ant 6	8.0	18.5	18.5
WLAN5.5GHz	Ant 7	8.0	18.0	18.0
WLAN5.5GHz	Ant 6+7	8.0	18.0	21.0
WLAN5.8GHz	Ant 6	9.0	18.0	18.0
WLAN5.8GHz	Ant 7	10.5	18.0	18.0
WLAN5.8GHz	Ant 6+7	9.0	18.0	21.0
WLAN6E B5	Ant 6	12.0	18.5	18.5
WLAN6E B5	Ant 7	10.5	18.5	18.5
WLAN6E B5	Ant 6+7	10.5	18.5	21.5
WLAN6E B6	Ant 6	11.5	17.0	17.0
WLAN6E B6	Ant 7	10.5	18.0	18.0
WLAN6E B6	Ant 6+7	10.5	17.0	20.5
WLAN6E B7	Ant 6	11.0	18.5	18.5
WLAN6E B7	Ant 7	10.5	18.0	18.0
WLAN6E B7	Ant 6+7	10.5	18.0	21.0
WLAN6E B8	Ant 6	11.0	16.0	16.0
WLAN6E B8	Ant 7	10.5	16.5	16.5
WLAN6E B8	Ant 6+7	10.5	16.0	19.5
WLAN6E B5 VLP	Ant 6	12.0	18.5	9.5
WLAN6E B5 VLP	Ant 7	10.5	18.5	9.5
WLAN6E B5 VLP	Ant 6+7	10.5	18.5	12.5
WLAN6E B6 VLP	Ant 6	11.5	17.0	9.0
WLAN6E B6 VLP	Ant 7	10.5	18.0	9.5
WLAN6E B6 VLP	Ant 6+7	10.5	17.0	12.0
WLAN6E B7 VLP	Ant 6	11.0	18.5	9.5
WLAN6E B7 VLP	Ant 7	10.5	18.0	9.5
WLAN6E B7 VLP	Ant 6+7	10.5	18.0	12.5
WLAN6E B8 VLP	Ant 6	11.0	16.0	9.5
WLAN6E B8 VLP	Ant 7	10.5	16.5	10.5
WLAN6E B8 VLP	Ant 6+7	10.5	16.0	13.0
RFID	Ant 8	20.0	25.0	25.0


Note:

- 1) *Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + Total uncertainty.
- 2) All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., RFID/WLAN/BT).
- 3) The max allowed output power is the Plimit + Total uncertainty, and if Plimit is higher than Pmax, the device output power will be Pmax instead.

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (7125MHz) and lowest frequency (900MHz) was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom face, Edge1, and Edge4 of the device are utilized to determine when the device comes in proximity of the user's body at the bottom face, Edge1, and Edge4 of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, all WLAN bands reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the bottom face, Edge1, and Edge4 of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

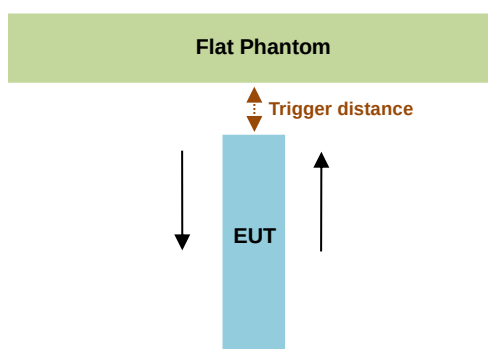

<Ant6 Frequency Bands>

Proximity Sensor Triggering Distance (mm)				
Position	Bottom Face		Edge 4	
	Moving away	Moving towards	Moving away	Moving towards
Minimum	33	29	35	31

<Ant7 Frequency Bands>

Proximity Sensor Triggering Distance (mm)				
Position	Bottom Face		Edge 1	
	Moving away	Moving towards	Moving away	Moving towards
Minimum	24	21	31	25

<Ant8 Frequency Bands>

Proximity Sensor Triggering Distance (mm)						
Position	Bottom Face		Edge 1		Edge 4	
	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards
Minimum	52	42	31	19	65	45

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.


Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 31mm at Edge 4 separation for Ant6 bands and 25mm at Edge 1 for Ant7 Bands and 19mm at Edge 1, 45mm at Edge 4 for Ant8 Bands.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

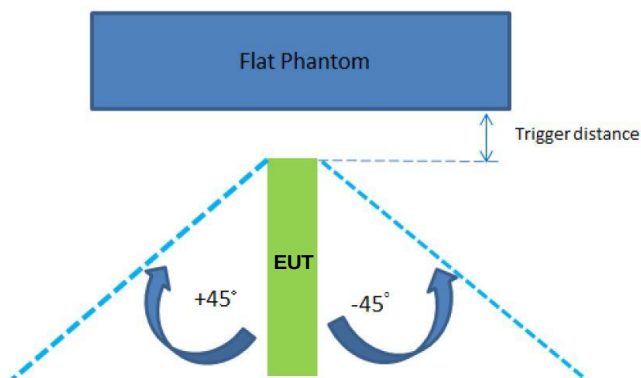

<Ant6 Frequency Bands>

The Sensor Trigger Distance (mm)	
Position	Edge 4
Minimum	31

<Ant7 Frequency Bands>

The Sensor Trigger Distance (mm)	
Position	Edge 1
Minimum	25

<Ant8 Frequency Bands>

The Sensor Trigger Distance (mm)		
Position	Edge 1	Edge 4
Minimum	19	45

Proximity sensor power reduction

Exposure Position / wireless mode for Ant6	Bottom Face ⁽¹⁾	Edge 1	Edge 2	Edge 3	Edge 4 ⁽¹⁾
WLAN 2.4GHz	6.0 dB	0 dB	0 dB	0 dB	6.0 dB
WLAN 5.2GHz	9.5 dB	0 dB	0 dB	0 dB	9.5 dB
WLAN 5.3GHz	11.5 dB	0 dB	0 dB	0 dB	11.5 dB
WLAN 5.5GHz	10.5 dB	0 dB	0 dB	0 dB	10.5 dB
WLAN 5.8GHz	9.0 dB	0 dB	0 dB	0 dB	9.0 dB
WLAN 6GHz U-NII 5	6.5 dB	0 dB	0 dB	0 dB	6.5 dB
WLAN 6GHz U-NII 6	5.5 dB	0 dB	0 dB	0 dB	5.5 dB
WLAN 6GHz U-NII 7	7.5 dB	0 dB	0 dB	0 dB	7.5 dB
WLAN 6GHz U-NII 8	5.0 dB	0 dB	0 dB	0 dB	5.0 dB

Exposure Position / wireless mode for Ant7	Bottom Face ⁽¹⁾	Edge 1 ⁽¹⁾	Edge 2	Edge 3	Edge 4
WLAN 2.4GHz	7.0 dB	7.0 dB	0 dB	0 dB	0 dB
WLAN 5.2GHz	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
WLAN 5.3GHz	7.0 dB	7.0 dB	0 dB	0 dB	0 dB
WLAN 5.5GHz	10.0 dB	10.0 dB	0 dB	0 dB	0 dB
WLAN 5.8GHz	7.5 dB	7.5 dB	0 dB	0 dB	0 dB
WLAN 6GHz U-NII 5	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
WLAN 6GHz U-NII 6	7.5 dB	7.5 dB	0 dB	0 dB	0 dB
WLAN 6GHz U-NII 7	7.5 dB	7.5 dB	0 dB	0 dB	0 dB
WLAN 6GHz U-NII 8	6.0 dB	6.0 dB	0 dB	0 dB	0 dB



Exposure Position / wireless mode for Ant8	Bottom Face ⁽¹⁾	Edge 1 ⁽¹⁾	Edge 2	Edge 3	Edge 4 ⁽¹⁾
RFID	5.0 dB	5.0 dB	0 dB	0 dB	5.0 dB



Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Power reduction is not applicable for Bluetooth.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 For Ant 6:
 - Bottom Face: 28mm
 - Edge 4: 30mm
 For Ant 7:
 - Bottom Face: 20mm
 - Edge 1: 24mm
 For Ant 8:
 - Bottom Face: 41mm
 - Edge 1: 18mm
 - Edge 4: 44mm



Power Measurement during Sensor Trigger distance testing



Band/Mode for Ant6	Measured power reduction (dBm)		Reduction Levels (dB)
	w/o power back-off	w/ power back-off	
WLAN 2.4GHz	22.00	16.00	6.0
WLAN 5.2GHz	19.50	10.00	9.5
WLAN 5.3GHz	20.00	8.50	11.5
WLAN 5.5GHz	20.00	9.50	10.5
WLAN 5.8GHz	19.50	10.50	9.0
WLAN 6GHz U-NII 5	20.00	13.50	6.5
WLAN 6GHz U-NII 6	18.50	13.00	5.5
WLAN 6GHz U-NII 7	20.00	12.50	7.5
WLAN 6GHz U-NII 8	17.50	12.50	5.0

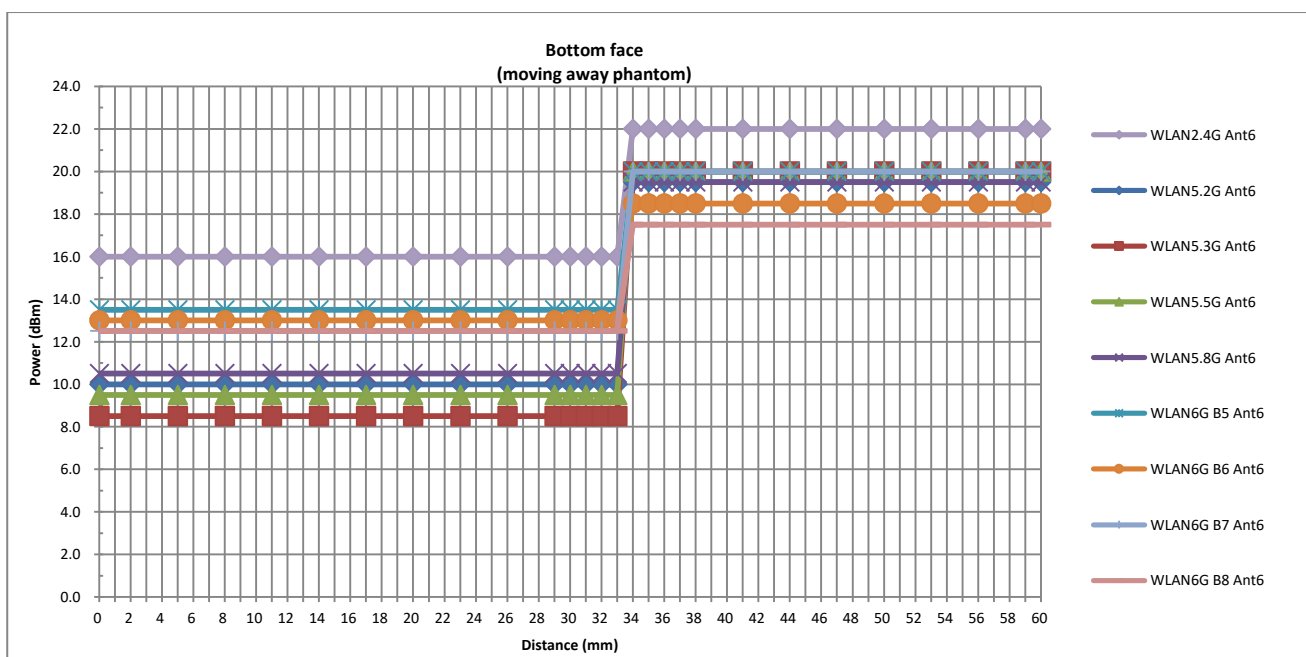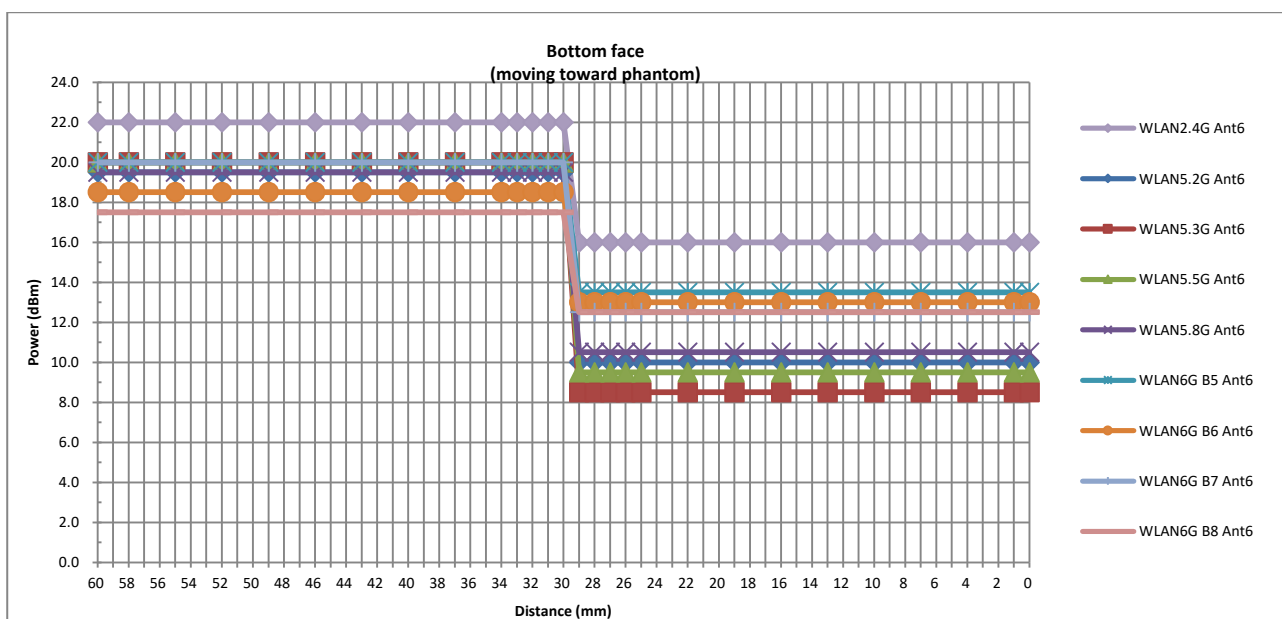

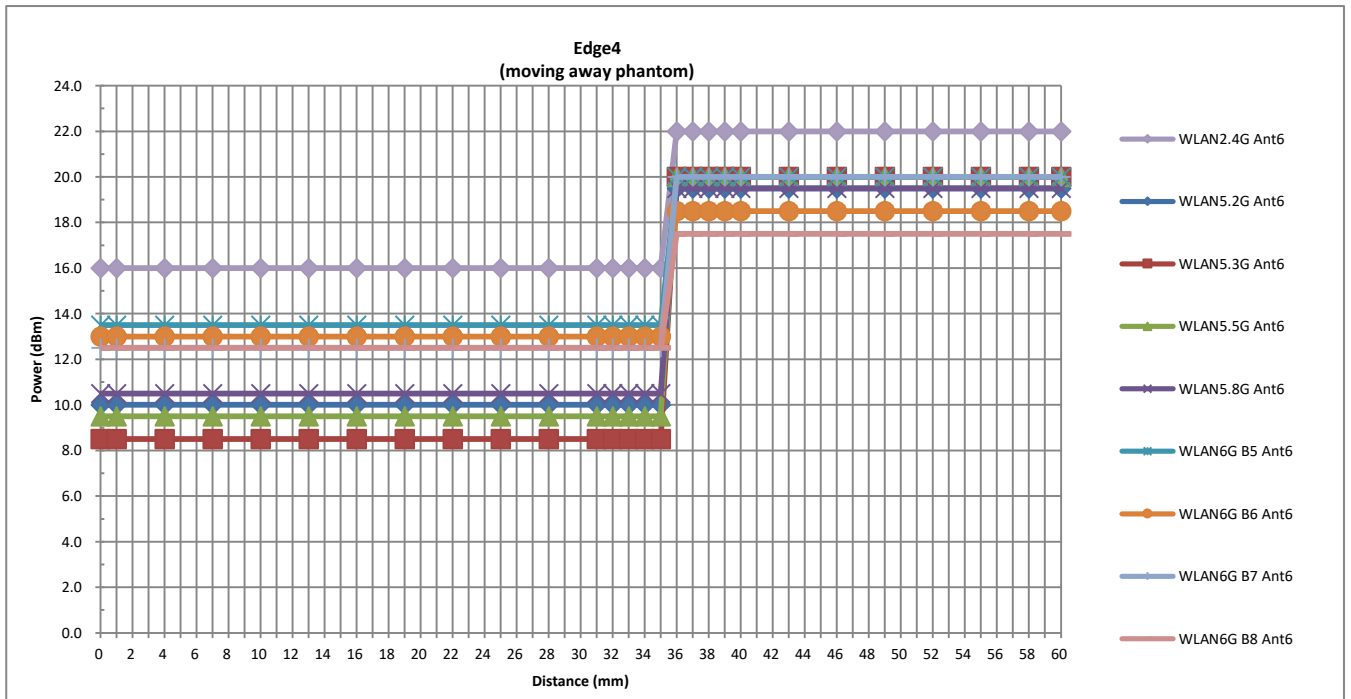
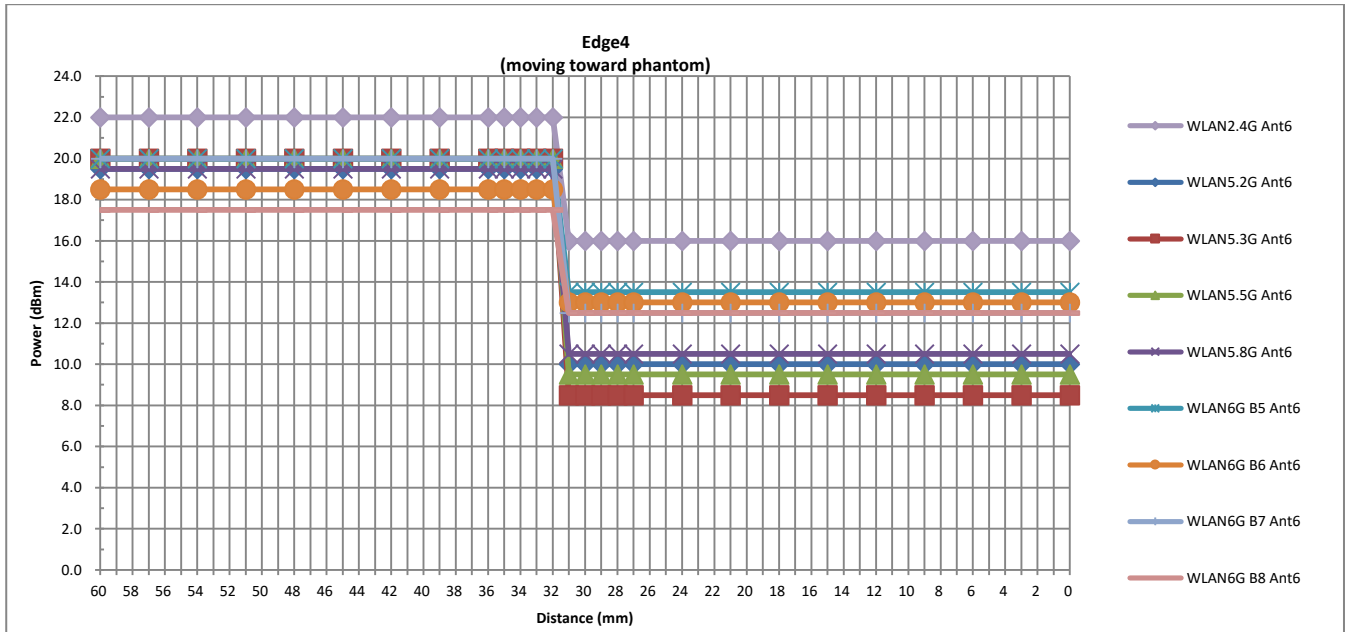




Band/Mode for Ant7	Measured power reduction (dBm)		Reduction Levels (dB)
	w/o power back-off	w/ power back-off	
WLAN 2.4GHz	23.00	16.00	7.0
WLAN 5.2GHz	19.50	15.50	4.0
WLAN 5.3GHz	19.50	12.50	7.0
WLAN 5.5GHz	19.50	9.50	10.0
WLAN 5.8GHz	19.50	12.00	7.5
WLAN 6GHz U-NII 5	20.00	12.00	8.0
WLAN 6GHz U-NII 6	19.50	12.00	7.5
WLAN 6GHz U-NII 7	19.50	12.00	7.5
WLAN 6GHz U-NII 8	18.00	12.00	6.0

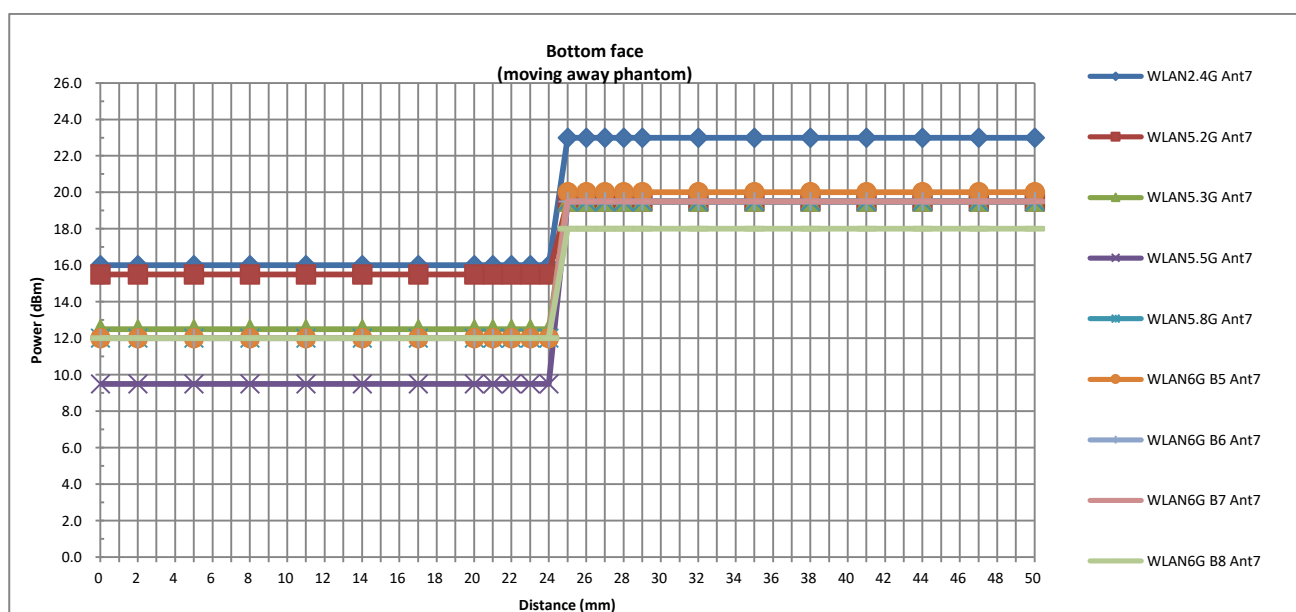
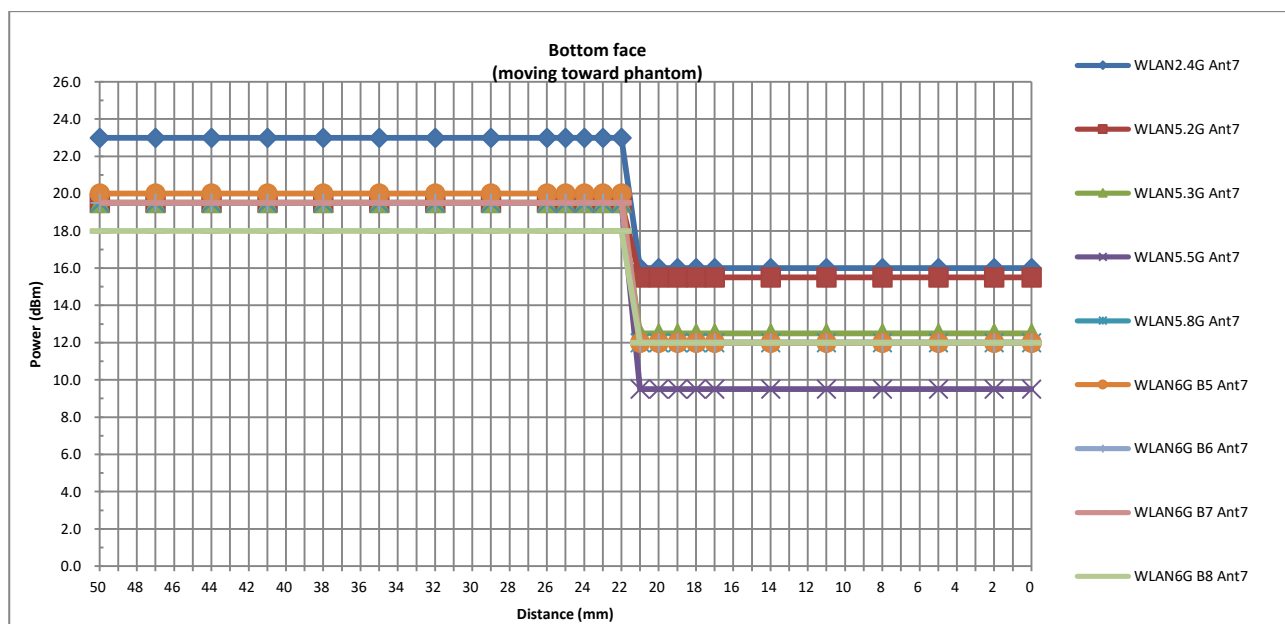


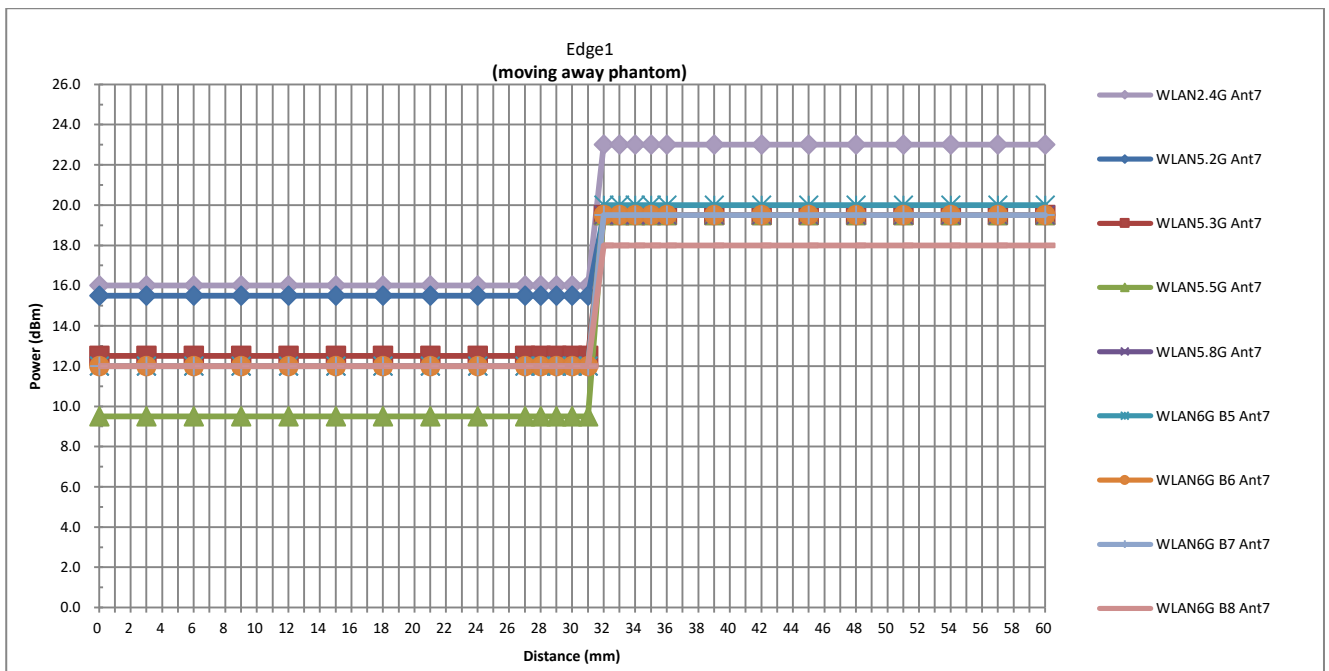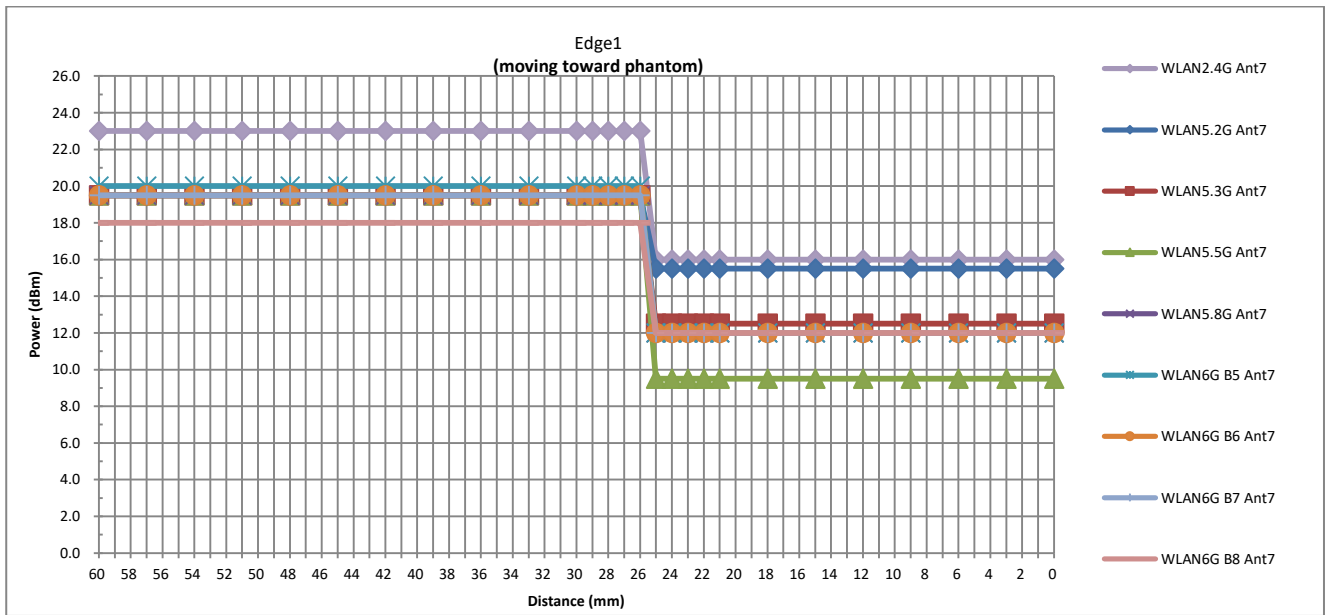

Band/Mode for Ant8	Measured power reduction (dBm)		Reduction Levels
	w/o power back-off	w/ power back-off	(dB)
RFID	26.00	21.00	5.0

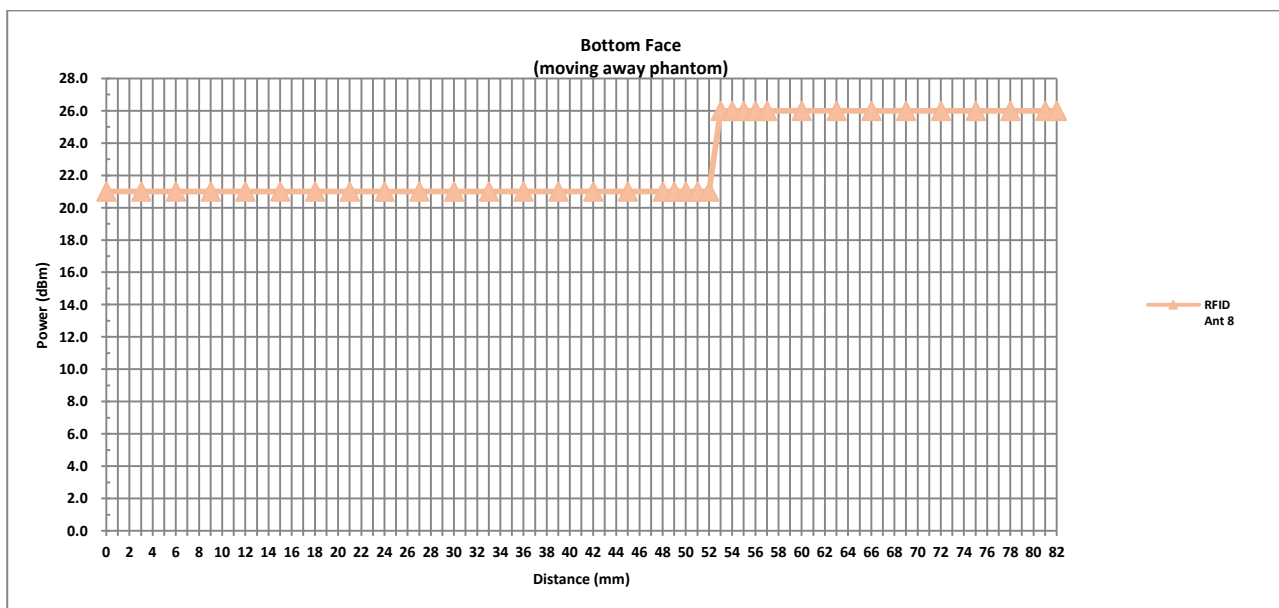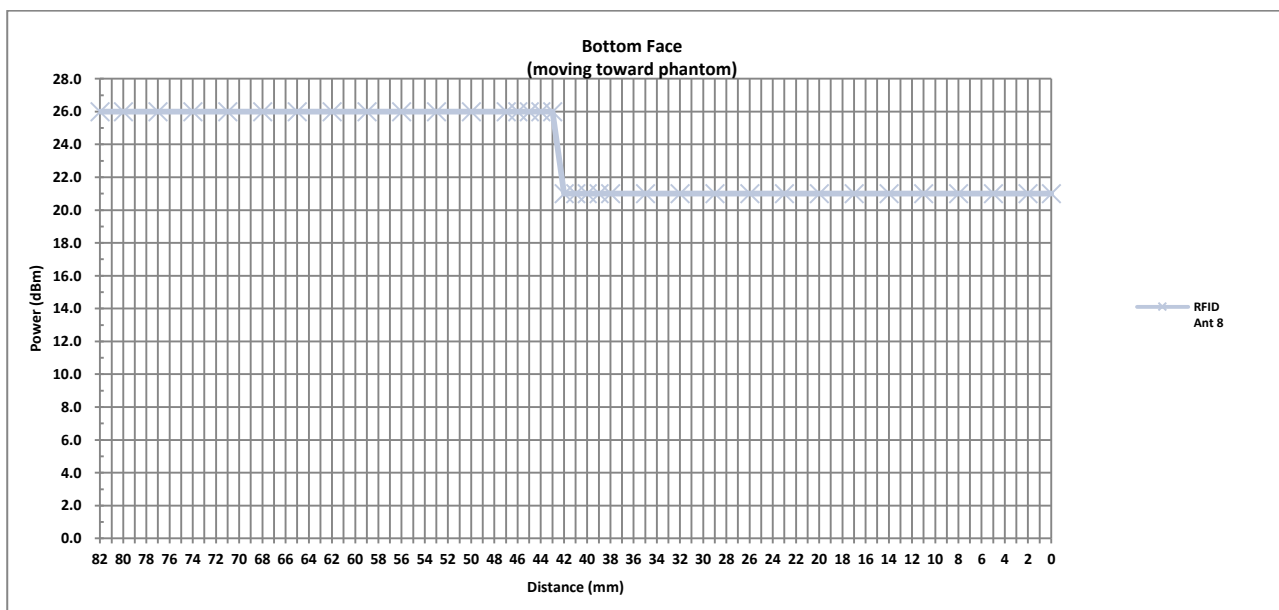

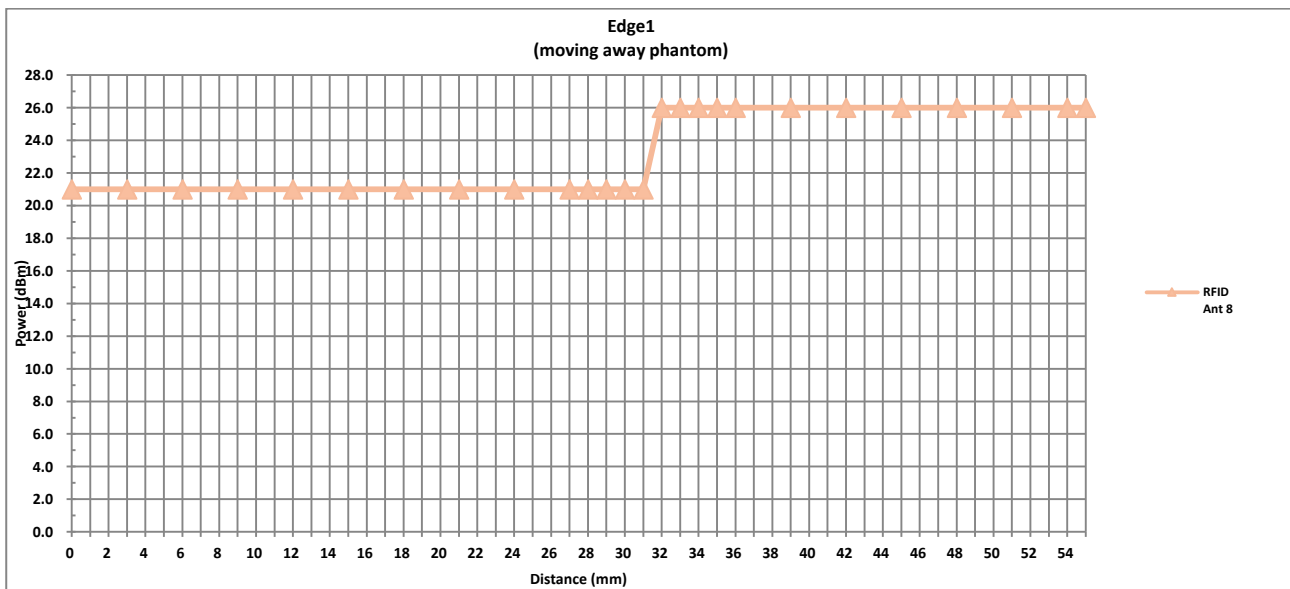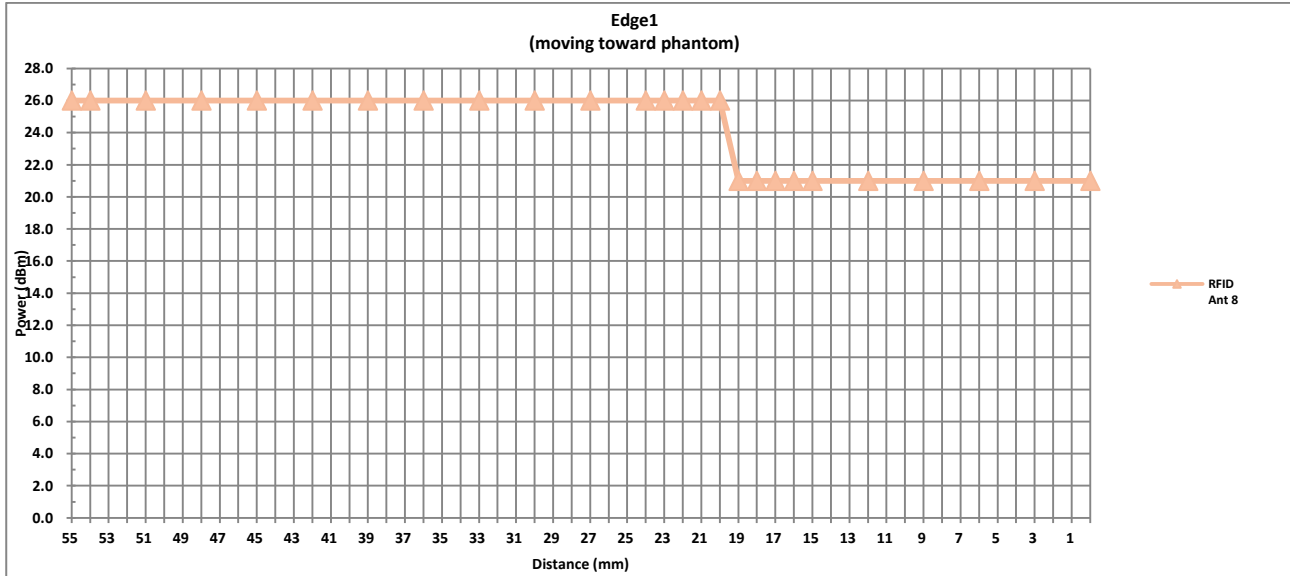

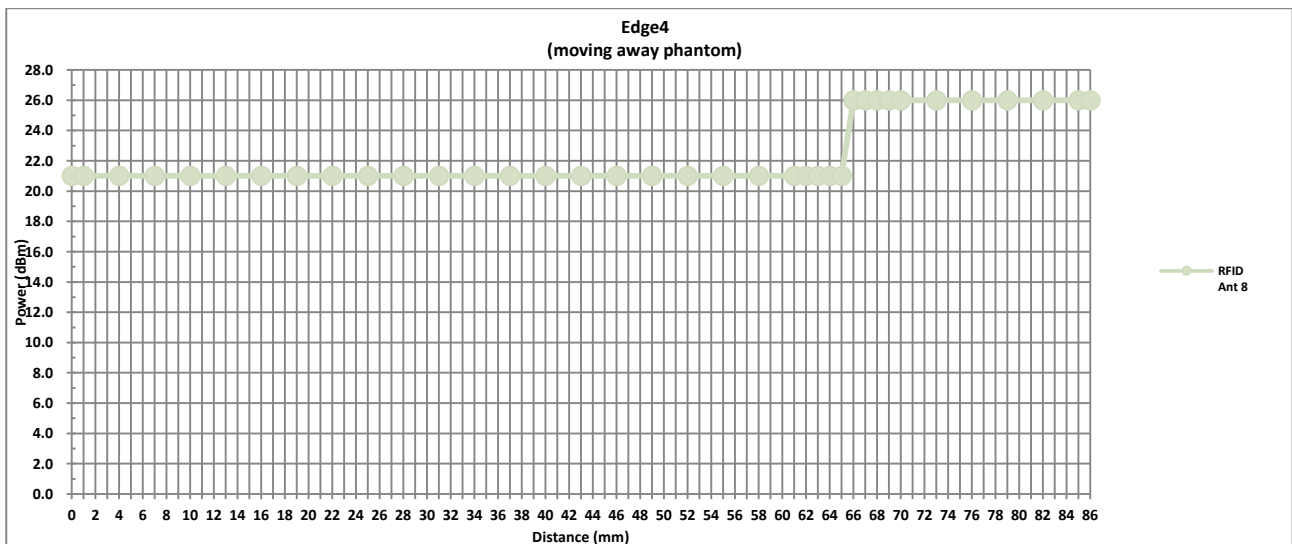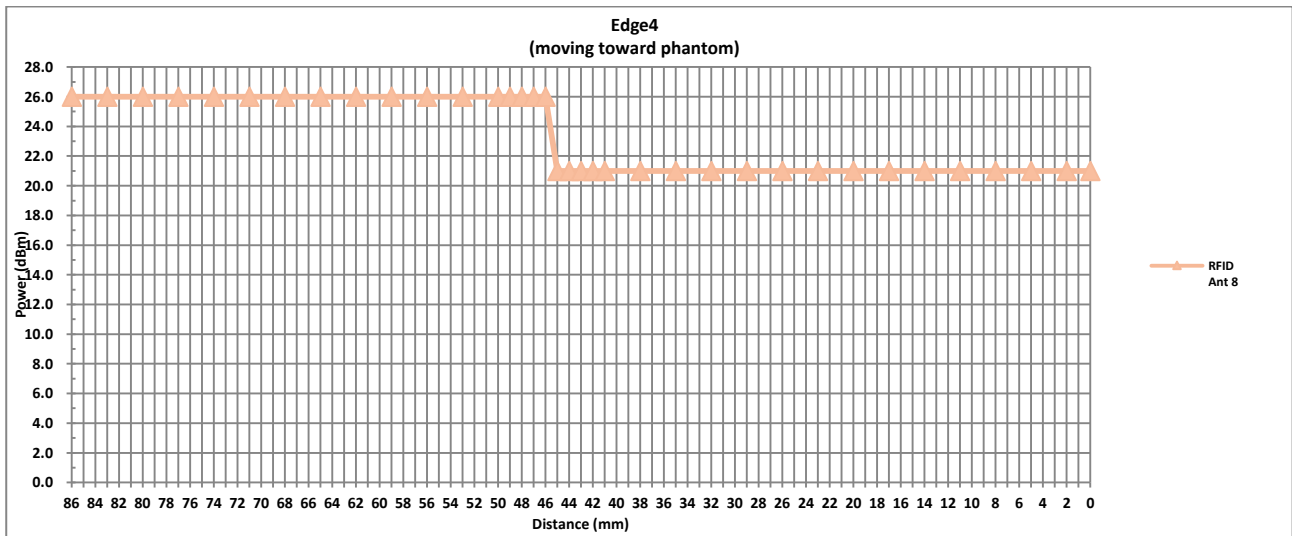

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310. The unit of power density evaluation is W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a square area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Note: 1.0 mW/cm² is 10 W/m²

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

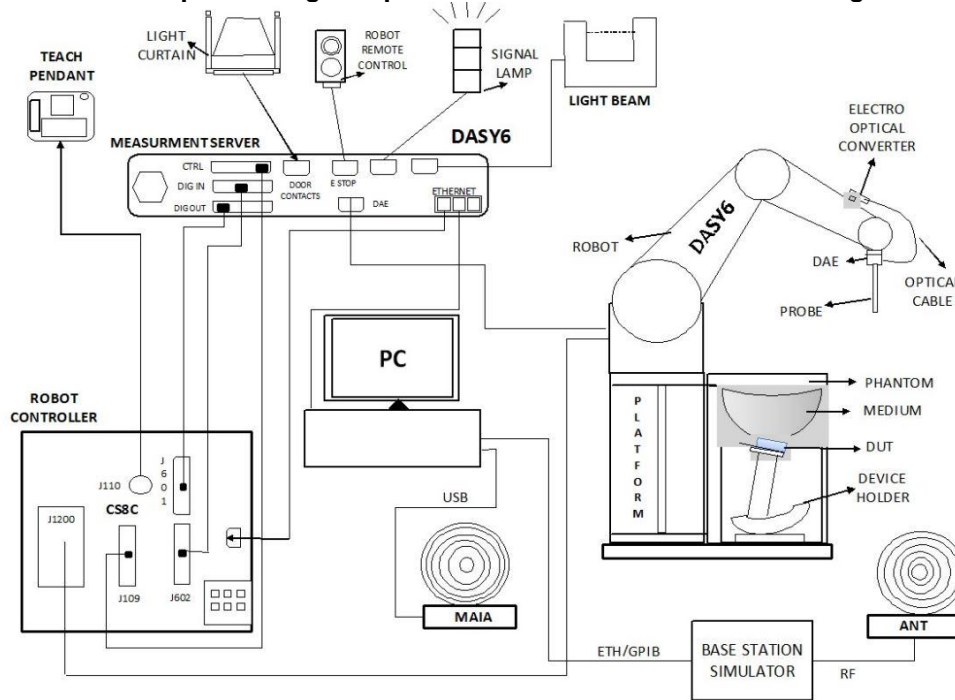

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6⁽¹⁾ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Note: 1. DASY6 software used: DASY6 mmWave V3.2.0.1840 and older generations and used the developed Plane-to-Plane Phase Reconstruction (PTP-PR) Algorithm which was used in PD measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

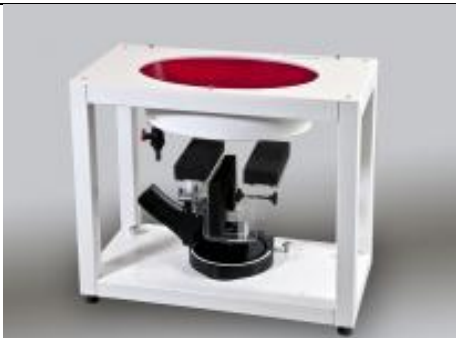Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	900MHz System Validation Kit	D900V2	1d186	Mar. 12, 2025	Mar. 11, 2026
SPEAG	2450MHz System Validation Kit	D2450V2	1095	Feb. 08, 2024	Feb. 06, 2026
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 17, 2025	Sep. 16, 2026
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1026	Jan. 28, 2025	Jan. 27, 2026
SPEAG	5G Verification Source	10GHz	2002	Feb. 20, 2025	Feb. 19, 2026
SPEAG	Data Acquisition Electronics	DAE4	1358	Jul. 15, 2025	Jul. 14, 2026
SPEAG	Data Acquisition Electronics	DAE4	1649	Aug. 27, 2025	Aug. 26, 2026
SPEAG	Data Acquisition Electronics	DAE4	1338	Mar. 18, 2025	Mar. 17, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7576	Nov. 04, 2025	Nov. 03, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Feb. 19, 2025	Feb. 18, 2026
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9441	Nov. 17, 2025	Nov. 16, 2026
SPEAG	mmWave Phantom	mmWave	1065	NCR	NCR
SPEAG	ELI Phantom	ELI4	TP-1201	NCR	NCR
SPEAG	ELI Phantom	ELI V8.0	TP-2135	NCR	NCR
Beichuang	Thermo-Hygrometer	HTC-1	1959633	May. 27, 2025	May. 26, 2026
Beichuang	Thermo-Hygrometer	HTC-1	1959634	May. 27, 2025	May. 26, 2026
Beichuang	Thermo-Hygrometer	HTC-1	1959632	May. 27, 2025	May. 26, 2026
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Rohde & Schwarz	Signal Generator	SMR40	100455	Dec. 26, 2025	Dec. 25, 2026
Keysight	Preamplifier	83017A	MY57280106	Apr. 18, 2025	Apr. 17, 2026
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	Jul. 02, 2025	Jul. 01, 2026
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	Feb. 24, 2025	Feb. 23, 2026
Anritsu	Vector Signal Generator	MG3710A	6201682672	Dec. 26, 2025	Dec. 25, 2026
Rohde & Schwarz	Power Meter	NRVD	102081	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRP50S	101385	Oct. 14, 2025	Oct. 13, 2026
R&S	BLUETOOTH TESTER	CBT	101246	Jul. 03, 2025	Jul. 02, 2026
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2025	Oct. 10, 2026
TES	DIGITAC THERMOMETER	TYPE-K	200505600	Jul. 05, 2025	Jul. 04, 2026
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
mini-circuits	amplifier	ZVE-3W-83+	162601250	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1.



Fig 10.1 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp ($^{\circ}\text{C}$)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
900	22.7	0.952	42.456	0.97	41.5	-1.86	2.3	± 5.0	2026/1/19
2450	22.7	1.771	39.283	1.8	39.2	-1.61	0.21	± 5.0	2026/1/15
5250	22.8	4.641	36.502	4.71	35.95	-1.46	1.54	± 5.0	2026/1/16
5600	22.6	5.008	35.809	5.07	35.5	-1.22	0.87	± 5.0	2026/1/17
5800	22.8	5.223	35.809	5.27	35.3	-0.89	1.44	± 5.0	2026/1/18
6500	22.8	6.08	34.2	6.07	34.5	0.16	-0.87	± 5.0	2026/1/25

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2026/1/19	900	50	D900V2 - 1d186	EX3DV4 - SN3857	DAE4 Sn1649	0.499	10.8	9.98	-7.59	0.351	6.93	7.02	1.3
2026/1/15	2450	50	D2450V2 - 1095	EX3DV4 - SN3857	DAE4 Sn1649	2.63	52.6	52.6	0	1.13	24.7	22.6	-8.5
2026/1/16	5250	50	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1649	3.91	78.1	78.2	0.13	1.13	22.4	22.6	0.89
2026/1/17	5600	50	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1649	3.91	80	78.2	-2.25	1.12	23	22.4	-2.61
2026/1/18	5800	50	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1649	3.81	77.9	76.2	-2.18	1.12	22.3	22.4	0.45
2026/1/25	6500	50	D6.5GHZV2 - 1026	EX3DV4 - SN7576	DAE4 Sn1358	15.2	296	304	2.7	2.69	54.8	53.8	-1.82

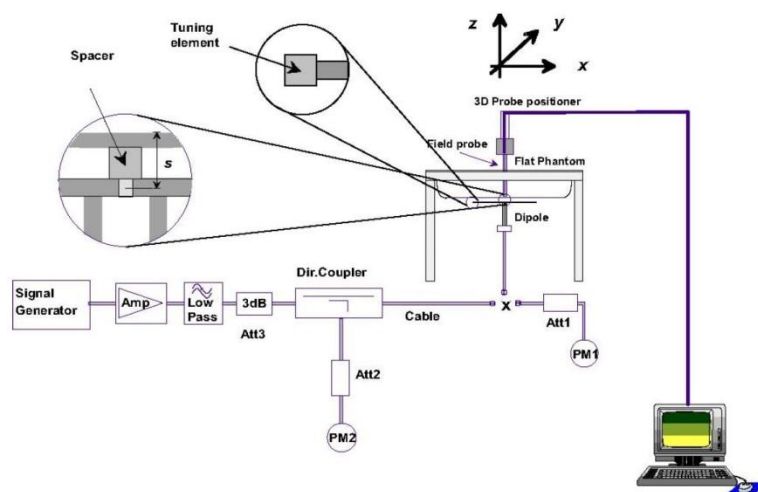


Fig 10.3.1 System Performance Check Setup




Fig 10.3.2 Setup Photo

12.4 PD System Verification Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Input Power (mW)	Measured psPDn+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDn+ 4 cm ² (W/m ²)	Targeted psPDn+ 4 cm ² (W/m ²)	Deviation (dB)	Measured psPDtot+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDtot+ 4 cm ² (W/m ²)	Targeted psPDtot+ 4 cm ² (W/m ²)	Deviation (dB)	Measured psPDmod+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDmod+ 4 cm ² (W/m ²)	Targeted psPDmod+ 4 cm ² (W/m ²)	Deviation (dB)	Date
10	10GHz_2002	9441	1338	10	100	91.6	145.1	166	-0.58	93	147.4	167	-0.54	94	148.9	172	-0.63	2026/2/18

Note: (1) means the measured PD was normalized to Prad power which can be referred to DASY Calibration Certificate in appendix C.

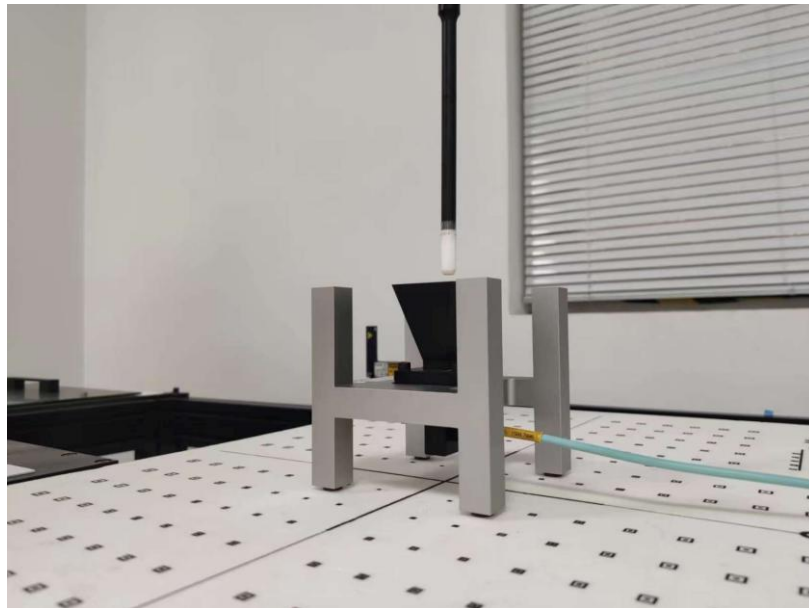

System Verification Setup Photo

13. RF Exposure Positions

13.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

13.2 Miscellaneous Testing Considerations

- Evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020.
- Per procedures of KDB Pubs. 447498 and 248227, and applicable product-specific procedures among KDB Pubs.
- Where supported by the test system, also report estimated absorbed (epithelial) power density (for reference purposes only, not specifically for compliance) and estimated incident PD, derived from measured SAR.
- In addition, for the highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane)
 - Adjust measured results per amount that measurement uncertainty exceeds 30 % (see e.g. IEC 62479:2010)

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.



14. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. For each frequency band or when MIMO mode was not performed, due to for each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
3. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
4. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
5. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
6. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
7. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
8. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test position configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.
9. Per April 2019 TCB workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)

10. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
11. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
12. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel
13. 802.11 ax/be supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
14. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO/MIMO antenna mode.
15. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.
16. The device supports WLAN 2.4GHz/5GHz Tx Beamforming mode for 11ax/be, and the Tx Beamforming power/EIRP is not greater than CDD mode, so conducted power of CDD mode can represent Tx Beamforming mode.
17. For WLAN6GHz SISO & MIMO(CDD) & MIMO(SDM) & TX Beamforming mode of 802.11ax, follow the steps below:
 - 1) For Standard Client, due to WLAN SISO & TX Beamforming mode power level is not greater than WLAN MIMO(SDM) & MIMO(CDD) mode, so conducted power of WLAN SISO & Tx Beamforming mode is not required.
 - 2) For Indoor Client, due to WLAN SISO & MIMO(CDD) & TX Beamforming mode power level is not greater than WLAN MIMO(SDM) mode, so conducted power of WLAN SISO & MIMO(CDD) & Tx Beamforming mode is not required.

<2.4GHz WLAN_Ant 6_Full Power>

2.4GHz WLAN_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	21.70	22.00	99.06
	6	2437	21.61	22.00	99.06
	11	2462	21.67	22.00	99.06
802.11g 6Mbps	1	2412	19.95	20.00	99.04
	6	2437	20.46	20.50	99.04
	11	2462	20.49	20.50	99.04
802.11n-HT20 MCS0	1	2412	18.76	19.00	100.00
	6	2437	19.66	20.00	100.00
	11	2462	19.74	20.00	100.00
802.11ac-VHT20 MCS0	1	2412	18.84	19.00	100.00
	6	2437	19.73	20.00	100.00
	11	2462	19.81	20.00	100.00
802.11ax-HE20 MCS0	1	2412	18.86	19.00	100.00
	6	2437	19.78	20.00	100.00
	11	2462	19.86	20.00	100.00
802.11be-EHT20 MCS0	1	2412	18.88	19.00	100.00
	6	2437	19.83	20.00	100.00
	11	2462	19.92	20.00	100.00

<2.4GHz WLAN_Ant 7_Full Power>

2.4GHz WLAN_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	21.40	21.50	99.06
	6	2437	22.99	23.00	99.06



	11	2462	21.75	22.00	99.06
802.11g 6Mbps	1	2412	19.86	20.00	99.04
	6	2437	20.51	21.00	99.04
	11	2462	20.40	20.50	99.04
802.11n-HT20 MCS0	1	2412	18.81	19.00	100.00
	6	2437	19.75	20.00	100.00
	11	2462	19.73	20.00	100.00
802.11ac-VHT20 MCS0	1	2412	18.87	19.00	100.00
	6	2437	19.82	20.00	100.00
	11	2462	19.77	20.00	100.00
802.11ax-HE20 MCS0	1	2412	18.89	19.00	100.00
	6	2437	19.86	20.00	100.00
	11	2462	19.80	20.00	100.00
802.11be-EHT20 MCS0	1	2412	18.92	19.00	100.00
	6	2437	19.92	20.00	100.00
	11	2462	19.86	20.00	100.00

<2.4GHz WLAN_Ant MIMO_Full Power>

2.4GHz WLAN_Ant MIMO_Full Power			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	24.56	25.00	99.06
	6	2437	25.37	25.50	99.06
	11	2462	24.72	25.00	99.06
802.11g 6Mbps	1	2412	22.92	23.00	99.04
	6	2437	23.50	23.50	99.04
	11	2462	23.46	23.50	99.04
802.11n-HT20 MCS0	1	2412	21.80	22.00	100.00
	6	2437	22.72	23.00	100.00
	11	2462	22.75	23.00	100.00
802.11ac-VHT20 MCS0	1	2412	21.87	22.00	100.00
	6	2437	22.79	23.00	100.00
	11	2462	22.80	23.00	100.00
802.11ax-HE20 MCS0	1	2412	21.89	22.00	100.00
	6	2437	22.83	23.00	100.00
	11	2462	22.84	23.00	100.00
802.11be-EHT20 MCS0	1	2412	21.91	22.00	100.00
	6	2437	22.89	23.00	100.00
	11	2462	22.90	23.00	100.00

<2.4GHz WLAN_Ant 6_DSI 3>

2.4GHz WLAN_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	15.53	16.00	99.06
	6	2437	15.91	16.00	99.06
	11	2462	15.97	16.00	99.06
802.11g 6Mbps	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11n-HT20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11ac-VHT20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11ax-HE20 MCS0	1	2412	Not Required	17.50	Not Required



802.11be-EHT20 MCS0	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required

<2.4GHz WLAN_Ant 7_DSI 3>

2.4GHz WLAN_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	15.81	16.00	99.06
	6	2437	15.55	16.00	99.06
	11	2462	15.95	16.00	99.06
802.11g 6Mbps	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11n-HT20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11ac-VHT20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11ax-HE20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required
802.11be-EHT20 MCS0	1	2412	Not Required	17.50	Not Required
	6	2437	Not Required	17.50	Not Required
	11	2462	Not Required	17.50	Not Required

<2.4GHz WLAN_Ant MIMO_DSI 3>

2.4GHz WLAN_Ant MIMO_DSI 3			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	18.68	19.00	99.06
	6	2437	18.74	19.00	99.06
	11	2462	18.97	19.00	99.06
802.11g 6Mbps	1	2412	Not Required	20.50	Not Required
	6	2437	Not Required	20.50	Not Required
	11	2462	Not Required	20.50	Not Required
802.11n-HT20 MCS0	1	2412	Not Required	20.50	Not Required
	6	2437	Not Required	20.50	Not Required
	11	2462	Not Required	20.50	Not Required
802.11ac-VHT20 MCS0	1	2412	Not Required	20.50	Not Required
	6	2437	Not Required	20.50	Not Required
	11	2462	Not Required	20.50	Not Required
802.11ax-HE20 MCS0	1	2412	Not Required	20.50	Not Required
	6	2437	Not Required	20.50	Not Required
	11	2462	Not Required	20.50	Not Required
802.11be-EHT20 MCS0	1	2412	Not Required	20.50	Not Required
	6	2437	Not Required	20.50	Not Required
	11	2462	Not Required	20.50	Not Required



<2.4GHz WLAN_Ant 6_DSI 0>

2.4GHz WLAN_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	21.70	22.00	99.06
	6	2437	21.61	22.00	99.06
	11	2462	21.67	22.00	99.06
802.11g 6Mbps	1	2412	19.95	20.00	99.04
	6	2437	20.46	20.50	99.04
	11	2462	20.49	20.50	99.04
802.11n-HT20 MCS0	1	2412	18.76	19.00	100.00
	6	2437	19.66	20.00	100.00
	11	2462	19.74	20.00	100.00
802.11ac-VHT20 MCS0	1	2412	18.84	19.00	100.00
	6	2437	19.73	20.00	100.00
	11	2462	19.81	20.00	100.00
802.11ax-HE20 MCS0	1	2412	18.86	19.00	100.00
	6	2437	19.78	20.00	100.00
	11	2462	19.86	20.00	100.00
802.11be-EHT20 MCS0	1	2412	18.88	19.00	100.00
	6	2437	19.83	20.00	100.00
	11	2462	19.92	20.00	100.00

<2.4GHz WLAN_Ant 7_DSI 0>

2.4GHz WLAN_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	21.40	21.50	99.06
	6	2437	22.99	23.00	99.06
	11	2462	21.75	22.00	99.06
802.11g 6Mbps	1	2412	19.86	20.00	99.04
	6	2437	20.51	21.00	99.04
	11	2462	20.40	20.50	99.04
802.11n-HT20 MCS0	1	2412	18.81	19.00	100.00
	6	2437	19.75	20.00	100.00
	11	2462	19.73	20.00	100.00
802.11ac-VHT20 MCS0	1	2412	18.87	19.00	100.00
	6	2437	19.82	20.00	100.00
	11	2462	19.77	20.00	100.00
802.11ax-HE20 MCS0	1	2412	18.89	19.00	100.00
	6	2437	19.86	20.00	100.00
	11	2462	19.80	20.00	100.00
802.11be-EHT20 MCS0	1	2412	18.92	19.00	100.00
	6	2437	19.92	20.00	100.00
	11	2462	19.86	20.00	100.00

<2.4GHz WLAN_Ant MIMO_DSI 0>

2.4GHz WLAN_Ant MIMO_DSI 0			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	24.56	25.00	99.06
	6	2437	25.37	25.50	99.06
	11	2462	24.72	25.00	99.06
802.11g 6Mbps	1	2412	22.92	23.00	99.04
	6	2437	23.50	23.50	99.04
	11	2462	23.46	23.50	99.04



802.11n-HT20 MCS0	1	2412	21.80	22.00	100.00
	6	2437	22.72	23.00	100.00
	11	2462	22.75	23.00	100.00
802.11ac-VHT20 MCS0	1	2412	21.87	22.00	100.00
	6	2437	22.79	23.00	100.00
	11	2462	22.80	23.00	100.00
802.11ax-HE20 MCS0	1	2412	21.89	22.00	100.00
	6	2437	22.83	23.00	100.00
	11	2462	22.84	23.00	100.00
802.11be-EHT20 MCS0	1	2412	21.91	22.00	100.00
	6	2437	22.89	23.00	100.00
	11	2462	22.90	23.00	100.00

<5.2GHz WLAN_FCC_Ant 6_Full Power>

5.2GHz WLAN_FCC_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	18.78	19.00	99.32
	40	5200	18.59	19.00	99.32
	44	5220	18.44	18.50	99.32
	48	5240	18.42	18.50	99.32
802.11n-HT20 MCS0	36	5180	19.16	19.50	100.00
	40	5200	19.09	19.50	100.00
	44	5220	18.93	19.00	100.00
	48	5240	18.99	19.00	100.00
802.11n-HT40 MCS0	38	5190	19.21	19.50	100.00
	46	5230	18.95	19.00	100.00
802.11ac-VHT20 MCS0	36	5180	19.22	19.50	100.00
	40	5200	19.14	19.50	100.00
	44	5220	18.99	19.00	100.00
	48	5240	19.05	19.50	100.00
802.11ac-VHT40 MCS0	38	5190	19.25	19.50	100.00
	46	5230	19.01	19.50	100.00
802.11ac-VHT80 MCS0	42	5210	18.94	19.00	100.00
802.11ax-HE20 MCS0	36	5180	19.26	19.50	100.00
	40	5200	19.18	19.50	100.00
	44	5220	19.02	19.50	100.00
	48	5240	19.11	19.50	100.00
802.11ax-HE40 MCS0	38	5190	19.30	19.50	100.00
	46	5230	19.08	19.50	100.00
802.11ax-HE80 MCS0	42	5210	18.97	19.00	100.00
802.11be-EHT20 MCS0	36	5180	19.33	19.50	100.00
	40	5200	19.24	19.50	100.00
	44	5220	19.08	19.50	100.00
	48	5240	19.15	19.50	100.00
802.11be-EHT40 MCS0	38	5190	19.36	19.50	100.00
	46	5230	19.12	19.50	100.00
802.11be-EHT80 MCS0	42	5210	19.03	19.50	100.00

**<5.3GHz WLAN_Ant 6_Full Power>**

5.3GHz WLAN_FCC_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	18.54	19.00	99.32
	56	5280	18.09	18.50	99.32
	60	5300	18.21	18.50	99.32
	64	5320	18.61	19.00	99.32
802.11n-HT20 MCS0	52	5260	18.83	19.00	100.00
	56	5280	19.09	19.50	100.00
	60	5300	18.71	19.00	100.00
	64	5320	19.42	19.50	100.00
802.11n-HT40 MCS0	54	5270	18.99	19.00	100.00
	62	5310	19.26	19.50	100.00
802.11ac-VHT20 MCS0	52	5260	18.88	19.00	100.00
	56	5280	19.18	19.50	100.00
	60	5300	18.73	19.00	100.00
	64	5320	19.46	19.50	100.00
802.11ac-VHT40 MCS0	54	5270	19.06	19.50	100.00
	62	5310	19.31	19.50	100.00
802.11ac-VHT80 MCS0	58	5290	19.25	19.50	100.00
802.11ac-VHT160 MCS0	50	5250	17.58	18.00	100.00
802.11ax-HE20 MCS0	52	5260	18.95	19.00	100.00
	56	5280	19.26	19.50	100.00
	60	5300	18.75	19.00	100.00
	64	5320	19.56	20.00	100.00
802.11ax-HE40 MCS0	54	5270	19.12	19.50	100.00
	62	5310	19.38	19.50	100.00
802.11ax-HE80 MCS0	58	5290	19.33	19.50	100.00
802.11ax-HE160 MCS0	50	5250	17.62	18.00	100.00
802.11be-EHT20 MCS0	52	5260	19.03	19.50	100.00
	56	5280	19.34	19.50	100.00
	60	5300	18.77	19.00	100.00
	64	5320	19.63	20.00	100.00
802.11be-EHT40 MCS0	54	5270	19.15	19.50	100.00
	62	5310	19.42	19.50	100.00
802.11be-EHT80 MCS0	58	5290	19.38	19.50	100.00
802.11be-EHT160 MCS0	50	5250	17.67	18.00	100.00

<5.5GHz WLAN_Ant 6_Full Power>

5.5GHz WLAN_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	18.92	19.00	99.32
	116	5580	19.42	19.50	99.32
	124	5620	19.41	19.50	99.32
	132	5660	19.52	20.00	99.32
	144	5720	19.28	19.50	99.32
802.11n-HT20 MCS0	100	5500	18.71	19.00	100.00
	116	5580	19.16	19.50	100.00
	124	5620	19.12	19.50	100.00
	132	5660	19.24	19.50	100.00
	144	5720	19.42	19.50	100.00
802.11n-HT40 MCS0	102	5510	18.77	19.00	100.00
	110	5550	18.85	19.00	100.00
	126	5630	19.24	19.50	100.00



	134	5670	19.19	19.50	100.00
	142	5710	18.89	19.00	100.00
802.11ac-VHT20 MCS0	100	5500	18.79	19.00	100.00
	116	5580	19.22	19.50	100.00
	124	5620	19.19	19.50	100.00
	132	5660	19.38	19.50	100.00
	144	5720	19.46	19.50	100.00
802.11ac-VHT40 MCS0	102	5510	18.82	19.00	100.00
	110	5550	18.91	19.00	100.00
	126	5630	19.33	19.50	100.00
	134	5670	19.34	19.50	100.00
	142	5710	18.93	19.00	100.00
802.11ac-VHT80 MCS0	106	5530	18.82	19.00	100.00
	122	5610	19.18	19.50	100.00
	138	5690	19.42	19.50	100.00
802.11ac-VHT160 MCS0	114	5570	17.51	18.00	100.00
802.11ax-HE20 MCS0	100	5500	18.82	19.00	100.00
	116	5580	19.29	19.50	100.00
	124	5620	19.27	19.50	100.00
	132	5660	19.42	19.50	100.00
	144	5720	19.52	20.00	100.00
802.11ax-HE40 MCS0	102	5510	18.85	19.00	100.00
	110	5550	18.94	19.00	100.00
	126	5630	19.36	19.50	100.00
	134	5670	19.40	19.50	100.00
	142	5710	18.96	19.00	100.00
802.11ax-HE80 MCS0	106	5530	18.87	19.00	100.00
	122	5610	19.26	19.50	100.00
	138	5690	19.48	19.50	100.00
802.11ax-HE160 MCS0	114	5570	17.54	18.00	100.00
802.11be-EHT20 MCS0	100	5500	18.88	19.00	100.00
	116	5580	19.33	19.50	100.00
	124	5620	19.32	19.50	100.00
	132	5660	19.47	19.50	100.00
	144	5720	19.55	20.00	100.00
802.11be-EHT40 MCS0	102	5510	18.88	19.00	100.00
	110	5550	18.98	19.00	100.00
	126	5630	19.39	19.50	100.00
	134	5670	19.44	19.50	100.00
	142	5710	19.00	19.00	100.00
802.11be-EHT80 MCS0	106	5530	18.92	19.00	100.00
	122	5610	19.34	19.50	100.00
	138	5690	19.53	20.00	100.00
802.11be-EHT160 MCS0	114	5570	17.58	18.00	100.00

<5.8GHz WLAN_Ant 6_Full Power>

5.8GHz WLAN_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	19.32	19.50	99.32
	157	5785	19.30	19.50	99.32
	165	5825	19.15	19.50	99.32
802.11n-HT20 MCS0	149	5745	19.11	19.50	100.00
	157	5785	19.02	19.50	100.00
	165	5825	18.95	19.00	100.00
802.11n-HT40 MCS0	151	5755	19.06	19.50	100.00



	159	5795	18.89	19.00	100.00
802.11ac-VHT20 MCS0	149	5745	19.16	19.50	100.00
	157	5785	19.08	19.50	100.00
	165	5825	19.02	19.50	100.00
	151	5755	19.15	19.50	100.00
802.11ac-VHT40 MCS0	159	5795	19.11	19.50	100.00
802.11ac-VHT80 MCS0	155	5775	19.08	19.50	100.00
802.11ax-HE20 MCS0	149	5745	19.21	19.50	100.00
	157	5785	19.14	19.50	100.00
	165	5825	19.08	19.50	100.00
	151	5755	19.21	19.50	100.00
802.11ax-HE40 MCS0	159	5795	19.20	19.50	100.00
802.11ax-HE80 MCS0	155	5775	19.12	19.50	100.00
802.11be-EHT20 MCS0	149	5745	19.28	19.50	100.00
	157	5785	19.17	19.50	100.00
	165	5825	19.19	19.50	100.00
	151	5755	19.24	19.50	100.00
802.11be-EHT40 MCS0	159	5795	19.24	19.50	100.00
802.11be-EHT80 MCS0	155	5775	19.19	19.50	100.00

<5.2GHz WLAN_FCC_Ant 7_Full Power>

5.2GHz WLAN_FCC_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	18.97	19.00	98.97
	40	5200	18.83	19.00	98.97
	44	5220	18.86	19.00	98.97
	48	5240	18.77	19.00	98.97
802.11n-HT20 MCS0	36	5180	19.18	19.50	100.00
	40	5200	19.22	19.50	100.00
	44	5220	19.19	19.50	100.00
	48	5240	19.15	19.50	100.00
802.11n-HT40 MCS0	38	5190	19.09	19.50	100.00
	46	5230	19.22	19.50	100.00
802.11ac-VHT20 MCS0	36	5180	19.27	19.50	100.00
	40	5200	19.26	19.50	100.00
	44	5220	19.31	19.50	100.00
	48	5240	19.23	19.50	100.00
802.11ac-VHT40 MCS0	38	5190	19.20	19.50	100.00
	46	5230	19.29	19.50	100.00
802.11ac-VHT80 MCS0	42	5210	19.33	19.50	100.00
802.11ax-HE20 MCS0	36	5180	19.33	19.50	100.00
	40	5200	19.30	19.50	100.00
	44	5220	19.34	19.50	100.00
	48	5240	19.26	19.50	100.00
802.11ax-HE40 MCS0	38	5190	19.27	19.50	100.00
	46	5230	19.35	19.50	100.00
802.11ax-HE80 MCS0	42	5210	19.39	19.50	100.00
802.11be-EHT20 MCS0	36	5180	19.37	19.50	100.00
	40	5200	19.36	19.50	100.00
	44	5220	19.39	19.50	100.00
	48	5240	19.33	19.50	100.00
802.11be-EHT40 MCS0	38	5190	19.30	19.50	100.00
	46	5230	19.38	19.50	100.00
802.11be-EHT80 MCS0	42	5210	19.45	19.50	100.00



<5.3GHz WLAN_Ant 7_Full Power>

5.3GHz WLAN_FCC_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	18.90	19.00	98.97
	56	5280	18.32	18.50	98.97
	60	5300	18.17	18.50	98.97
	64	5320	18.05	18.50	98.97
802.11n-HT20 MCS0	52	5260	19.05	19.50	100.00
	56	5280	19.01	19.50	100.00
	60	5300	18.54	19.00	100.00
	64	5320	18.82	19.00	100.00
802.11n-HT40 MCS0	54	5270	19.15	19.50	100.00
	62	5310	18.88	19.00	100.00
802.11ac-VHT20 MCS0	52	5260	19.14	19.50	100.00
	56	5280	19.08	19.50	100.00
	60	5300	18.56	19.00	100.00
	64	5320	18.87	19.00	100.00
802.11ac-VHT40 MCS0	54	5270	19.18	19.50	100.00
	62	5310	18.94	19.00	100.00
802.11ac-VHT80 MCS0	58	5290	19.02	19.50	100.00
802.11ac-VHT160 MCS0	50	5250	18.31	18.50	100.00
802.11ax-HE20 MCS0	52	5260	19.21	19.50	100.00
	56	5280	19.17	19.50	100.00
	60	5300	18.58	19.00	100.00
	64	5320	18.90	19.00	100.00
802.11ax-HE40 MCS0	54	5270	19.23	19.50	100.00
	62	5310	19.00	19.00	100.00
802.11ax-HE80 MCS0	58	5290	19.11	19.50	100.00
802.11ax-HE160 MCS0	50	5250	18.35	18.50	100.00
802.11be-EHT20 MCS0	52	5260	19.24	19.50	100.00
	56	5280	19.23	19.50	100.00
	60	5300	18.63	19.00	100.00
	64	5320	18.94	19.00	100.00
802.11be-EHT40 MCS0	54	5270	19.28	19.50	100.00
	62	5310	19.06	19.50	100.00
802.11be-EHT80 MCS0	58	5290	19.16	19.50	100.00
802.11be-EHT160 MCS0	50	5250	18.38	18.50	100.00

<5.5GHz WLAN_Ant 7_Full Power>

5.5GHz WLAN_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	19.46	19.50	98.97
	116	5580	19.07	19.50	98.97
	124	5620	19.13	19.50	98.97
	132	5660	19.12	19.50	98.97
	144	5720	19.11	19.50	98.97
802.11n-HT20 MCS0	100	5500	19.26	19.50	100.00
	116	5580	18.97	19.00	100.00
	124	5620	18.91	19.00	100.00
	132	5660	18.88	19.00	100.00
	144	5720	19.03	19.50	100.00
802.11n-HT40 MCS0	102	5510	19.24	19.50	100.00
	110	5550	19.08	19.50	100.00
	126	5630	18.85	19.00	100.00



	134	5670	18.92	19.00	100.00
	142	5710	18.77	19.00	100.00
802.11ac-VHT20 MCS0	100	5500	19.37	19.50	100.00
	116	5580	19.01	19.50	100.00
	124	5620	18.96	19.00	100.00
	132	5660	18.95	19.00	100.00
	144	5720	19.11	19.50	100.00
	102	5510	19.32	19.50	100.00
802.11ac-VHT40 MCS0	110	5550	19.11	19.50	100.00
	126	5630	18.93	19.00	100.00
	134	5670	18.98	19.00	100.00
	142	5710	18.86	19.00	100.00
	106	5530	19.26	19.50	100.00
802.11ac-VHT80 MCS0	122	5610	19.03	19.50	100.00
	138	5690	19.22	19.50	100.00
802.11ac-VHT160 MCS0	114	5570	17.34	17.50	100.00
802.11ax-HE20 MCS0	100	5500	19.40	19.50	100.00
	116	5580	19.03	19.50	100.00
	124	5620	19.05	19.50	100.00
	132	5660	19.01	19.50	100.00
	144	5720	19.15	19.50	100.00
802.11ax-HE40 MCS0	102	5510	19.41	19.50	100.00
	110	5550	19.19	19.50	100.00
	126	5630	18.98	19.00	100.00
	134	5670	19.05	19.50	100.00
	142	5710	18.92	19.00	100.00
802.11ax-HE80 MCS0	106	5530	19.30	19.50	100.00
	122	5610	19.12	19.50	100.00
	138	5690	19.28	19.50	100.00
802.11ax-HE160 MCS0	114	5570	17.39	17.50	100.00
802.11be-EHT20 MCS0	100	5500	19.42	19.50	100.00
	116	5580	19.08	19.50	100.00
	124	5620	19.09	19.50	100.00
	132	5660	19.06	19.50	100.00
	144	5720	19.20	19.50	100.00
802.11be-EHT40 MCS0	102	5510	19.44	19.50	100.00
	110	5550	19.23	19.50	100.00
	126	5630	19.02	19.50	100.00
	134	5670	19.08	19.50	100.00
	142	5710	18.98	19.00	100.00
802.11be-EHT80 MCS0	106	5530	19.37	19.50	100.00
	122	5610	19.16	19.50	100.00
	138	5690	19.31	19.50	100.00
802.11be-EHT160 MCS0	114	5570	17.41	17.50	100.00

<5.8GHz WLAN_Ant 7_Full Power>

5.8GHz WLAN_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	19.27	19.50	98.97
	157	5785	19.26	19.50	98.97
	165	5825	19.19	19.50	98.97
802.11n-HT20 MCS0	149	5745	18.92	19.00	100.00
	157	5785	19.01	19.50	100.00
	165	5825	18.96	19.00	100.00
802.11n-HT40 MCS0	151	5755	18.92	19.00	100.00



	159	5795	18.97	19.00	100.00
802.11ac-VHT20 MCS0	149	5745	19.03	19.50	100.00
	157	5785	19.12	19.50	100.00
	165	5825	19.04	19.50	100.00
	151	5755	18.99	19.00	100.00
802.11ac-VHT40 MCS0	159	5795	19.05	19.50	100.00
802.11ac-VHT80 MCS0	155	5775	19.13	19.50	100.00
802.11ax-HE20 MCS0	149	5745	19.09	19.50	100.00
	157	5785	19.14	19.50	100.00
	165	5825	19.07	19.50	100.00
802.11ax-HE40 MCS0	151	5755	19.12	19.50	100.00
802.11ax-HE80 MCS0	159	5795	19.15	19.50	100.00
	155	5775	19.25	19.50	100.00
	149	5745	19.15	19.50	100.00
802.11be-EHT20 MCS0	157	5785	19.21	19.50	100.00
	165	5825	19.12	19.50	100.00
	151	5755	19.18	19.50	100.00
802.11be-EHT40 MCS0	159	5795	19.19	19.50	100.00
802.11be-EHT80 MCS0	155	5775	19.30	19.50	100.00

<5.2GHz WLAN_FCC_Ant MIMO_Full Power>

5.2GHz WLAN_FCC_Ant MIMO_Full Power			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	21.89	22.00	99.32
	40	5200	21.72	22.00	99.32
	44	5220	21.67	22.00	99.32
	48	5240	21.61	22.00	99.32
802.11n-HT20 MCS0	36	5180	22.18	22.50	100.00
	40	5200	22.17	22.50	100.00
	44	5220	22.07	22.50	100.00
	48	5240	22.08	22.50	100.00
802.11n-HT40 MCS0	38	5190	22.16	22.50	100.00
	46	5230	22.10	22.50	100.00
802.11ac-VHT20 MCS0	36	5180	22.26	22.50	100.00
	40	5200	22.21	22.50	100.00
	44	5220	22.16	22.50	100.00
	48	5240	22.15	22.50	100.00
802.11ac-VHT40 MCS0	38	5190	22.24	22.50	100.00
	46	5230	22.16	22.50	100.00
802.11ac-VHT80 MCS0	42	5210	22.15	22.50	100.00
802.11ax-HE20 MCS0	36	5180	22.31	22.50	100.00
	40	5200	22.25	22.50	100.00
	44	5220	22.19	22.50	100.00
	48	5240	22.20	22.50	100.00
802.11ax-HE40 MCS0	38	5190	22.30	22.50	100.00
	46	5230	22.23	22.50	100.00
802.11ax-HE80 MCS0	42	5210	22.20	22.50	100.00
802.11be-EHT20 MCS0	36	5180	22.36	22.50	100.00
	40	5200	22.31	22.50	100.00
	44	5220	22.25	22.50	100.00
	48	5240	22.25	22.50	100.00
802.11be-EHT40 MCS0	38	5190	22.34	22.50	100.00
	46	5230	22.26	22.50	100.00
802.11be-EHT80 MCS0	42	5210	22.26	22.50	100.00

**<5.3GHz WLAN_Ant MIMO_Full Power>**

5.3GHz WLAN_FCC_Ant MIMO_Full Power			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	21.74	22.00	99.32
	56	5280	21.22	21.50	99.32
	60	5300	21.20	21.50	99.32
	64	5320	21.35	21.50	99.32
802.11n-HT20 MCS0	52	5260	21.95	22.00	100.00
	56	5280	22.06	22.50	100.00
	60	5300	21.64	22.00	100.00
	64	5320	22.14	22.50	100.00
802.11n-HT40 MCS0	54	5270	22.08	22.50	100.00
	62	5310	22.08	22.50	100.00
802.11ac-VHT20 MCS0	52	5260	22.02	22.50	100.00
	56	5280	22.14	22.50	100.00
	60	5300	21.66	22.00	100.00
	64	5320	22.19	22.50	100.00
802.11ac-VHT40 MCS0	54	5270	22.13	22.50	100.00
	62	5310	22.14	22.50	100.00
802.11ac-VHT80 MCS0	58	5290	22.15	22.50	100.00
802.11ac-VHT160 MCS0	50	5250	20.97	21.00	100.00
802.11ax-HE20 MCS0	52	5260	22.09	22.50	100.00
	56	5280	22.23	22.50	100.00
	60	5300	21.68	22.00	100.00
	64	5320	22.25	22.50	100.00
802.11ax-HE40 MCS0	54	5270	22.19	22.50	100.00
	62	5310	22.20	22.50	100.00
802.11ax-HE80 MCS0	58	5290	22.23	22.50	100.00
802.11ax-HE160 MCS0	50	5250	21.01	21.50	100.00
802.11be-EHT20 MCS0	52	5260	22.15	22.50	100.00
	56	5280	22.30	22.50	100.00
	60	5300	21.71	22.00	100.00
	64	5320	22.31	22.50	100.00
802.11be-EHT40 MCS0	54	5270	22.23	22.50	100.00
	62	5310	22.25	22.50	100.00
802.11be-EHT80 MCS0	58	5290	22.28	22.50	100.00
802.11be-EHT160 MCS0	50	5250	21.05	21.50	100.00

<5.5GHz WLAN_Ant MIMO_Full Power>

5.5GHz WLAN_Ant MIMO_Full Power			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	22.21	22.50	99.32
	116	5580	22.26	22.50	99.32
	124	5620	22.28	22.50	99.32
	132	5660	22.34	22.50	99.32
	144	5720	22.21	22.50	99.32
802.11n-HT20 MCS0	100	5500	22.00	22.00	100.00
	116	5580	22.08	22.50	100.00
	124	5620	22.03	22.50	100.00
	132	5660	22.07	22.50	100.00
	144	5720	22.24	22.50	100.00
802.11n-HT40 MCS0	102	5510	22.02	22.50	100.00
	110	5550	21.98	22.00	100.00
	126	5630	22.06	22.50	100.00



	134	5670	22.07	22.50	100.00
	142	5710	21.84	22.00	100.00
802.11ac-VHT20 MCS0	100	5500	22.10	22.50	100.00
	116	5580	22.13	22.50	100.00
	124	5620	22.09	22.50	100.00
	132	5660	22.18	22.50	100.00
	144	5720	22.30	22.50	100.00
802.11ac-VHT40 MCS0	102	5510	22.09	22.50	100.00
	110	5550	22.02	22.50	100.00
	126	5630	22.14	22.50	100.00
	134	5670	22.17	22.50	100.00
	142	5710	21.91	22.00	100.00
802.11ac-VHT80 MCS0	106	5530	22.06	22.50	100.00
	122	5610	22.12	22.50	100.00
	138	5690	22.33	22.50	100.00
802.11ac-VHT160 MCS0	114	5570	20.44	20.50	100.00
802.11ax-HE20 MCS0	100	5500	22.13	22.50	100.00
	116	5580	22.17	22.50	100.00
	124	5620	22.17	22.50	100.00
	132	5660	22.23	22.50	100.00
	144	5720	22.35	22.50	100.00
802.11ax-HE40 MCS0	102	5510	22.15	22.50	100.00
	110	5550	22.08	22.50	100.00
	126	5630	22.18	22.50	100.00
	134	5670	22.24	22.50	100.00
	142	5710	21.95	22.00	100.00
802.11ax-HE80 MCS0	106	5530	22.10	22.50	100.00
	122	5610	22.20	22.50	100.00
	138	5690	22.39	22.50	100.00
802.11ax-HE160 MCS0	114	5570	20.48	20.50	100.00
802.11be-EHT20 MCS0	100	5500	22.17	22.50	100.00
	116	5580	22.22	22.50	100.00
	124	5620	22.22	22.50	100.00
	132	5660	22.28	22.50	100.00
	144	5720	22.39	22.50	100.00
802.11be-EHT40 MCS0	102	5510	22.18	22.50	100.00
	110	5550	22.12	22.50	100.00
	126	5630	22.22	22.50	100.00
	134	5670	22.27	22.50	100.00
	142	5710	22.00	22.00	100.00
802.11be-EHT80 MCS0	106	5530	22.16	22.50	100.00
	122	5610	22.26	22.50	100.00
	138	5690	22.43	22.50	100.00
802.11be-EHT160 MCS0	114	5570	20.51	21.00	100.00

<5.8GHz WLAN_Ant MIMO_Full Power>

5.8GHz WLAN_Ant MIMO_Full Power			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	22.31	22.50	99.32
	157	5785	22.29	22.50	99.32
	165	5825	22.18	22.50	99.32
802.11n-HT20 MCS0	149	5745	22.03	22.50	100.00
	157	5785	22.03	22.50	100.00
	165	5825	21.97	22.00	100.00
802.11n-HT40 MCS0	151	5755	22.00	22.00	100.00



	159	5795	21.94	22.00	100.00
802.11ac-VHT20 MCS0	149	5745	22.11	22.50	100.00
	157	5785	22.11	22.50	100.00
	165	5825	22.04	22.50	100.00
	151	5755	22.08	22.50	100.00
802.11ac-VHT40 MCS0	159	5795	22.09	22.50	100.00
802.11ac-VHT80 MCS0	155	5775	22.12	22.50	100.00
802.11ax-HE20 MCS0	149	5745	22.16	22.50	100.00
	157	5785	22.15	22.50	100.00
	165	5825	22.09	22.50	100.00
	151	5755	22.18	22.50	100.00
802.11ax-HE40 MCS0	159	5795	22.19	22.50	100.00
802.11ax-HE80 MCS0	155	5775	22.20	22.50	100.00
802.11be-EHT20 MCS0	149	5745	22.23	22.50	100.00
	157	5785	22.20	22.50	100.00
	165	5825	22.17	22.50	100.00
	151	5755	22.22	22.50	100.00
802.11be-EHT40 MCS0	159	5795	22.23	22.50	100.00
802.11be-EHT80 MCS0	155	5775	22.26	22.50	100.00

<5.2GHz WLAN_Ant 6_DSI 3>

5.2GHz WLAN_FCC_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	Not Required	10.00	Not Required
	40	5200	Not Required	10.00	Not Required
	44	5220	Not Required	10.00	Not Required
	48	5240	Not Required	10.00	Not Required
802.11n-HT20 MCS0	36	5180	Not Required	10.00	Not Required
	40	5200	Not Required	10.00	Not Required
	44	5220	Not Required	10.00	Not Required
	48	5240	Not Required	10.00	Not Required
802.11n-HT40 MCS0	38	5190	Not Required	10.00	Not Required
	46	5230	Not Required	10.00	Not Required
802.11ac-VHT20 MCS0	36	5180	Not Required	10.00	Not Required
	40	5200	Not Required	10.00	Not Required
	44	5220	Not Required	10.00	Not Required
	48	5240	Not Required	10.00	Not Required
802.11ac-VHT40 MCS0	38	5190	Not Required	10.00	Not Required
	46	5230	Not Required	10.00	Not Required
802.11ac-VHT80 MCS0	42	5210	9.81	10.00	100.00
802.11ax-HE20 MCS0	36	5180	Not Required	10.00	Not Required
	40	5200	Not Required	10.00	Not Required
	44	5220	Not Required	10.00	Not Required
	48	5240	Not Required	10.00	Not Required
802.11ax-HE40 MCS0	38	5190	Not Required	10.00	Not Required
	46	5230	Not Required	10.00	Not Required
802.11ax-HE80 MCS0	42	5210	Not Required	10.00	Not Required
802.11be-EHT20 MCS0	36	5180	Not Required	10.00	Not Required
	40	5200	Not Required	10.00	Not Required
	44	5220	Not Required	10.00	Not Required
	48	5240	Not Required	10.00	Not Required
802.11be-EHT40 MCS0	38	5190	Not Required	10.00	Not Required
	46	5230	Not Required	10.00	Not Required
802.11be-EHT80 MCS0	42	5210	Not Required	10.00	Not Required

**<5.3GHz WLAN_Ant 6_DSI 3>**

5.3GHz WLAN_FCC_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	Not Required	8.50	Not Required
	56	5280	Not Required	8.50	Not Required
	60	5300	Not Required	8.50	Not Required
	64	5320	Not Required	8.50	Not Required
802.11n-HT20 MCS0	52	5260	Not Required	8.50	Not Required
	56	5280	Not Required	8.50	Not Required
	60	5300	Not Required	8.50	Not Required
	64	5320	Not Required	8.50	Not Required
802.11n-HT40 MCS0	54	5270	Not Required	8.50	Not Required
	62	5310	Not Required	8.50	Not Required
802.11ac-VHT20 MCS0	52	5260	Not Required	8.50	Not Required
	56	5280	Not Required	8.50	Not Required
	60	5300	Not Required	8.50	Not Required
	64	5320	Not Required	8.50	Not Required
802.11ac-VHT40 MCS0	54	5270	Not Required	8.50	Not Required
	62	5310	Not Required	8.50	Not Required
802.11ac-VHT80 MCS0	58	5290	Not Required	8.50	Not Required
802.11ac-VHT160 MCS0	50	5250	8.41	8.50	100.00
802.11ax-HE20 MCS0	52	5260	Not Required	8.50	Not Required
	56	5280	Not Required	8.50	Not Required
	60	5300	Not Required	8.50	Not Required
	64	5320	Not Required	8.50	Not Required
802.11ax-HE40 MCS0	54	5270	Not Required	8.50	Not Required
	62	5310	Not Required	8.50	Not Required
802.11ax-HE80 MCS0	58	5290	Not Required	8.50	Not Required
802.11ax-HE160 MCS0	50	5250	Not Required	8.50	Not Required
802.11be-EHT20 MCS0	52	5260	Not Required	8.50	Not Required
	56	5280	Not Required	8.50	Not Required
	60	5300	Not Required	8.50	Not Required
	64	5320	Not Required	8.50	Not Required
802.11be-EHT40 MCS0	54	5270	Not Required	8.50	Not Required
	62	5310	Not Required	8.50	Not Required
802.11be-EHT80 MCS0	58	5290	Not Required	8.50	Not Required
802.11be-EHT160 MCS0	50	5250	Not Required	8.50	Not Required

<5.5GHz WLAN_Ant 6_DSI 3>

5.5GHz WLAN_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11n-HT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11n-HT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required



	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ac-VHT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11ac-VHT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ac-VHT80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11ac-VHT160 MCS0	114	5570	9.45	9.50	100.00
802.11ax-HE20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11ax-HE40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ax-HE80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11ax-HE160 MCS0	114	5570	Not Required	9.50	Not Required
802.11be-EHT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11be-EHT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11be-EHT80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11be-EHT160 MCS0	114	5570	Not Required	9.50	Not Required

<5.8GHz WLAN_Ant 6_DSI 3>

5.8GHz WLAN_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	Not Required	10.50	Not Required
	157	5785	Not Required	10.50	Not Required
	165	5825	Not Required	10.50	Not Required
802.11n-HT20 MCS0	149	5745	Not Required	10.50	Not Required
	157	5785	Not Required	10.50	Not Required
	165	5825	Not Required	10.50	Not Required
802.11n-HT40 MCS0	151	5755	Not Required	10.50	Not Required



	159	5795	Not Required	10.50	Not Required
802.11ac-VHT20 MCS0	149	5745	Not Required	10.50	Not Required
	157	5785	Not Required	10.50	Not Required
	165	5825	Not Required	10.50	Not Required
	151	5755	Not Required	10.50	Not Required
802.11ac-VHT40 MCS0	159	5795	Not Required	10.50	Not Required
802.11ac-VHT80 MCS0	155	5775	10.49	10.50	100.00
802.11ax-HE20 MCS0	149	5745	Not Required	10.50	Not Required
	157	5785	Not Required	10.50	Not Required
	165	5825	Not Required	10.50	Not Required
	151	5755	Not Required	10.50	Not Required
802.11ax-HE40 MCS0	159	5795	Not Required	10.50	Not Required
802.11ax-HE80 MCS0	155	5775	Not Required	10.50	Not Required
802.11be-EHT20 MCS0	149	5745	Not Required	10.50	Not Required
	157	5785	Not Required	10.50	Not Required
	165	5825	Not Required	10.50	Not Required
	151	5755	Not Required	10.50	Not Required
802.11be-EHT40 MCS0	159	5795	Not Required	10.50	Not Required
802.11be-EHT80 MCS0	155	5775	Not Required	10.50	Not Required

<5.2GHz WLAN_Ant 7_DSI 3>

5.2GHz WLAN_FCC_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	Not Required	15.50	Not Required
	40	5200	Not Required	15.50	Not Required
	44	5220	Not Required	15.50	Not Required
	48	5240	Not Required	15.50	Not Required
802.11n-HT20 MCS0	36	5180	Not Required	15.50	Not Required
	40	5200	Not Required	15.50	Not Required
	44	5220	Not Required	15.50	Not Required
	48	5240	Not Required	15.50	Not Required
802.11n-HT40 MCS0	38	5190	Not Required	15.50	Not Required
	46	5230	Not Required	15.50	Not Required
802.11ac-VHT20 MCS0	36	5180	Not Required	15.50	Not Required
	40	5200	Not Required	15.50	Not Required
	44	5220	Not Required	15.50	Not Required
	48	5240	Not Required	15.50	Not Required
802.11ac-VHT40 MCS0	38	5190	Not Required	15.50	Not Required
	46	5230	Not Required	15.50	Not Required
802.11ac-VHT80 MCS0	42	5210	15.41	15.50	100.00
802.11ax-HE20 MCS0	36	5180	Not Required	15.50	Not Required
	40	5200	Not Required	15.50	Not Required
	44	5220	Not Required	15.50	Not Required
	48	5240	Not Required	15.50	Not Required
802.11ax-HE40 MCS0	38	5190	Not Required	15.50	Not Required
	46	5230	Not Required	15.50	Not Required
802.11ax-HE80 MCS0	42	5210	Not Required	15.50	Not Required
802.11be-EHT20 MCS0	36	5180	Not Required	15.50	Not Required
	40	5200	Not Required	15.50	Not Required
	44	5220	Not Required	15.50	Not Required
	48	5240	Not Required	15.50	Not Required
802.11be-EHT40 MCS0	38	5190	Not Required	15.50	Not Required
	46	5230	Not Required	15.50	Not Required
802.11be-EHT80 MCS0	42	5210	Not Required	15.50	Not Required

**<5.3GHz WLAN_Ant 7_DSI 3>**

5.3GHz WLAN_FCC_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	Not Required	12.50	Not Required
	56	5280	Not Required	12.50	Not Required
	60	5300	Not Required	12.50	Not Required
	64	5320	Not Required	12.50	Not Required
802.11n-HT20 MCS0	52	5260	Not Required	12.50	Not Required
	56	5280	Not Required	12.50	Not Required
	60	5300	Not Required	12.50	Not Required
	64	5320	Not Required	12.50	Not Required
802.11n-HT40 MCS0	54	5270	Not Required	12.50	Not Required
	62	5310	Not Required	12.50	Not Required
802.11ac-VHT20 MCS0	52	5260	Not Required	12.50	Not Required
	56	5280	Not Required	12.50	Not Required
	60	5300	Not Required	12.50	Not Required
	64	5320	Not Required	12.50	Not Required
802.11ac-VHT40 MCS0	54	5270	Not Required	12.50	Not Required
	62	5310	Not Required	12.50	Not Required
802.11ac-VHT80 MCS0	58	5290	Not Required	12.50	Not Required
802.11ac-VHT160 MCS0	50	5250	12.32	12.50	100.00
802.11ax-HE20 MCS0	52	5260	Not Required	12.50	Not Required
	56	5280	Not Required	12.50	Not Required
	60	5300	Not Required	12.50	Not Required
	64	5320	Not Required	12.50	Not Required
802.11ax-HE40 MCS0	54	5270	Not Required	12.50	Not Required
	62	5310	Not Required	12.50	Not Required
802.11ax-HE80 MCS0	58	5290	Not Required	12.50	Not Required
802.11ax-HE160 MCS0	50	5250	Not Required	12.50	Not Required
802.11be-EHT20 MCS0	52	5260	Not Required	12.50	Not Required
	56	5280	Not Required	12.50	Not Required
	60	5300	Not Required	12.50	Not Required
	64	5320	Not Required	12.50	Not Required
802.11be-EHT40 MCS0	54	5270	Not Required	12.50	Not Required
	62	5310	Not Required	12.50	Not Required
802.11be-EHT80 MCS0	58	5290	Not Required	12.50	Not Required
802.11be-EHT160 MCS0	50	5250	Not Required	12.50	Not Required

<5.5GHz WLAN_Ant 7_DSI 3>

5.5GHz WLAN_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11n-HT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11n-HT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required



	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ac-VHT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11ac-VHT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ac-VHT80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11ac-VHT160 MCS0	114	5570	9.39	9.50	100.00
802.11ax-HE20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11ax-HE40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11ax-HE80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11ax-HE160 MCS0	114	5570	Not Required	9.50	Not Required
802.11be-EHT20 MCS0	100	5500	Not Required	9.50	Not Required
	116	5580	Not Required	9.50	Not Required
	124	5620	Not Required	9.50	Not Required
	132	5660	Not Required	9.50	Not Required
	144	5720	Not Required	9.50	Not Required
802.11be-EHT40 MCS0	102	5510	Not Required	9.50	Not Required
	110	5550	Not Required	9.50	Not Required
	126	5630	Not Required	9.50	Not Required
	134	5670	Not Required	9.50	Not Required
	142	5710	Not Required	9.50	Not Required
802.11be-EHT80 MCS0	106	5530	Not Required	9.50	Not Required
	122	5610	Not Required	9.50	Not Required
	138	5690	Not Required	9.50	Not Required
802.11be-EHT160 MCS0	114	5570	Not Required	9.50	Not Required

<5.8GHz WLAN_Ant 7_DSI 3>

5.8GHz WLAN_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	Not Required	12.00	Not Required
	157	5785	Not Required	12.00	Not Required
	165	5825	Not Required	12.00	Not Required
802.11n-HT20 MCS0	149	5745	Not Required	12.00	Not Required
	157	5785	Not Required	12.00	Not Required
	165	5825	Not Required	12.00	Not Required
802.11n-HT40 MCS0	151	5755	Not Required	12.00	Not Required



	159	5795	Not Required	12.00	Not Required
802.11ac-VHT20 MCS0	149	5745	Not Required	12.00	Not Required
	157	5785	Not Required	12.00	Not Required
	165	5825	Not Required	12.00	Not Required
	151	5755	Not Required	12.00	Not Required
802.11ac-VHT40 MCS0	159	5795	Not Required	12.00	Not Required
802.11ac-VHT80 MCS0	155	5775	11.68	12.00	100.00
802.11ax-HE20 MCS0	149	5745	Not Required	12.00	Not Required
	157	5785	Not Required	12.00	Not Required
	165	5825	Not Required	12.00	Not Required
	151	5755	Not Required	12.00	Not Required
802.11ax-HE40 MCS0	159	5795	Not Required	12.00	Not Required
802.11ax-HE80 MCS0	155	5775	Not Required	12.00	Not Required
802.11be-EHT20 MCS0	149	5745	Not Required	12.00	Not Required
	157	5785	Not Required	12.00	Not Required
	165	5825	Not Required	12.00	Not Required
	151	5755	Not Required	12.00	Not Required
802.11be-EHT40 MCS0	159	5795	Not Required	12.00	Not Required
802.11be-EHT80 MCS0	155	5775	Not Required	12.00	Not Required

<5.2GHz WLAN_Ant MIMO_DSI 3>

5.2GHz WLAN_FCC_Ant MIMO_DSI 3			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	Not Required	16.50	Not Required
	40	5200	Not Required	16.50	Not Required
	44	5220	Not Required	16.50	Not Required
	48	5240	Not Required	16.50	Not Required
802.11n-HT20 MCS0	36	5180	Not Required	16.50	Not Required
	40	5200	Not Required	16.50	Not Required
	44	5220	Not Required	16.50	Not Required
	48	5240	Not Required	16.50	Not Required
802.11n-HT40 MCS0	38	5190	Not Required	16.50	Not Required
	46	5230	Not Required	16.50	Not Required
802.11ac-VHT20 MCS0	36	5180	Not Required	16.50	Not Required
	40	5200	Not Required	16.50	Not Required
	44	5220	Not Required	16.50	Not Required
	48	5240	Not Required	16.50	Not Required
802.11ac-VHT40 MCS0	38	5190	Not Required	16.50	Not Required
	46	5230	Not Required	16.50	Not Required
802.11ac-VHT80 MCS0	42	5210	16.47	16.50	100.00
802.11ax-HE20 MCS0	36	5180	Not Required	16.50	Not Required
	40	5200	Not Required	16.50	Not Required
	44	5220	Not Required	16.50	Not Required
	48	5240	Not Required	16.50	Not Required
802.11ax-HE40 MCS0	38	5190	Not Required	16.50	Not Required
	46	5230	Not Required	16.50	Not Required
802.11ax-HE80 MCS0	42	5210	Not Required	16.50	Not Required
802.11be-EHT20 MCS0	36	5180	Not Required	16.50	Not Required
	40	5200	Not Required	16.50	Not Required
	44	5220	Not Required	16.50	Not Required
	48	5240	Not Required	16.50	Not Required
802.11be-EHT40 MCS0	38	5190	Not Required	16.50	Not Required
	46	5230	Not Required	16.50	Not Required
802.11be-EHT80 MCS0	42	5210	Not Required	16.50	Not Required

**<5.3GHz WLAN_Ant MIMO_DSI 3>**

5.3GHz WLAN_FCC_Ant MIMO_DSI 3			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	Not Required	14.00	Not Required
	56	5280	Not Required	14.00	Not Required
	60	5300	Not Required	14.00	Not Required
	64	5320	Not Required	14.00	Not Required
802.11n-HT20 MCS0	52	5260	Not Required	14.00	Not Required
	56	5280	Not Required	14.00	Not Required
	60	5300	Not Required	14.00	Not Required
	64	5320	Not Required	14.00	Not Required
802.11n-HT40 MCS0	54	5270	Not Required	14.00	Not Required
	62	5310	Not Required	14.00	Not Required
802.11ac-VHT20 MCS0	52	5260	Not Required	14.00	Not Required
	56	5280	Not Required	14.00	Not Required
	60	5300	Not Required	14.00	Not Required
	64	5320	Not Required	14.00	Not Required
802.11ac-VHT40 MCS0	54	5270	Not Required	14.00	Not Required
	62	5310	Not Required	14.00	Not Required
802.11ac-VHT80 MCS0	58	5290	Not Required	14.00	Not Required
802.11ac-VHT160 MCS0	50	5250	13.80	14.00	100.00
802.11ax-HE20 MCS0	52	5260	Not Required	14.00	Not Required
	56	5280	Not Required	14.00	Not Required
	60	5300	Not Required	14.00	Not Required
	64	5320	Not Required	14.00	Not Required
802.11ax-HE40 MCS0	54	5270	Not Required	14.00	Not Required
	62	5310	Not Required	14.00	Not Required
802.11ax-HE80 MCS0	58	5290	Not Required	14.00	Not Required
802.11ax-HE160 MCS0	50	5250	Not Required	14.00	Not Required
802.11be-EHT20 MCS0	52	5260	Not Required	14.00	Not Required
	56	5280	Not Required	14.00	Not Required
	60	5300	Not Required	14.00	Not Required
	64	5320	Not Required	14.00	Not Required
802.11be-EHT40 MCS0	54	5270	Not Required	14.00	Not Required
	62	5310	Not Required	14.00	Not Required
802.11be-EHT80 MCS0	58	5290	Not Required	14.00	Not Required
802.11be-EHT160 MCS0	50	5250	Not Required	14.00	Not Required

<5.5GHz WLAN_Ant MIMO_DSI 3>

5.5GHz WLAN_Ant MIMO_DSI 3			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	Not Required	12.50	Not Required
	116	5580	Not Required	12.50	Not Required
	124	5620	Not Required	12.50	Not Required
	132	5660	Not Required	12.50	Not Required
	144	5720	Not Required	12.50	Not Required
802.11n-HT20 MCS0	100	5500	Not Required	12.50	Not Required
	116	5580	Not Required	12.50	Not Required
	124	5620	Not Required	12.50	Not Required
	132	5660	Not Required	12.50	Not Required
	144	5720	Not Required	12.50	Not Required
802.11n-HT40 MCS0	102	5510	Not Required	12.50	Not Required
	110	5550	Not Required	12.50	Not Required
	126	5630	Not Required	12.50	Not Required



	134	5670	Not Required	12.50	Not Required
	142	5710	Not Required	12.50	Not Required
802.11ac-VHT20 MCS0	100	5500	Not Required	12.50	Not Required
	116	5580	Not Required	12.50	Not Required
	124	5620	Not Required	12.50	Not Required
	132	5660	Not Required	12.50	Not Required
	144	5720	Not Required	12.50	Not Required
802.11ac-VHT40 MCS0	102	5510	Not Required	12.50	Not Required
	110	5550	Not Required	12.50	Not Required
	126	5630	Not Required	12.50	Not Required
	134	5670	Not Required	12.50	Not Required
	142	5710	Not Required	12.50	Not Required
802.11ac-VHT80 MCS0	106	5530	Not Required	12.50	Not Required
	122	5610	Not Required	12.50	Not Required
	138	5690	Not Required	12.50	Not Required
802.11ac-VHT160 MCS0	114	5570	12.43	12.50	100.00
802.11ax-HE20 MCS0	100	5500	Not Required	12.50	Not Required
	116	5580	Not Required	12.50	Not Required
	124	5620	Not Required	12.50	Not Required
	132	5660	Not Required	12.50	Not Required
	144	5720	Not Required	12.50	Not Required
802.11ax-HE40 MCS0	102	5510	Not Required	12.50	Not Required
	110	5550	Not Required	12.50	Not Required
	126	5630	Not Required	12.50	Not Required
	134	5670	Not Required	12.50	Not Required
	142	5710	Not Required	12.50	Not Required
802.11ax-HE80 MCS0	106	5530	Not Required	12.50	Not Required
	122	5610	Not Required	12.50	Not Required
	138	5690	Not Required	12.50	Not Required
802.11ax-HE160 MCS0	114	5570	Not Required	12.50	Not Required
802.11be-EHT20 MCS0	100	5500	Not Required	12.50	Not Required
	116	5580	Not Required	12.50	Not Required
	124	5620	Not Required	12.50	Not Required
	132	5660	Not Required	12.50	Not Required
	144	5720	Not Required	12.50	Not Required
802.11be-EHT40 MCS0	102	5510	Not Required	12.50	Not Required
	110	5550	Not Required	12.50	Not Required
	126	5630	Not Required	12.50	Not Required
	134	5670	Not Required	12.50	Not Required
	142	5710	Not Required	12.50	Not Required
802.11be-EHT80 MCS0	106	5530	Not Required	12.50	Not Required
	122	5610	Not Required	12.50	Not Required
	138	5690	Not Required	12.50	Not Required
802.11be-EHT160 MCS0	114	5570	Not Required	12.50	Not Required

<5.8GHz WLAN_Ant MIMO_DSI 3>

5.8GHz WLAN_Ant MIMO_DSI 3			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	Not Required	14.30	Not Required
	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
802.11n-HT20 MCS0	149	5745	Not Required	14.30	Not Required
	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
802.11n-HT40 MCS0	151	5755	Not Required	14.30	Not Required



	159	5795	Not Required	14.30	Not Required
802.11ac-VHT20 MCS0	149	5745	Not Required	14.30	Not Required
	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
	151	5755	Not Required	14.30	Not Required
802.11ac-VHT40 MCS0	159	5795	Not Required	14.30	Not Required
	155	5775	14.14	14.30	100.00
802.11ac-VHT80 MCS0	149	5745	Not Required	14.30	Not Required
	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
802.11ax-HE20 MCS0	151	5755	Not Required	14.30	Not Required
	159	5795	Not Required	14.30	Not Required
802.11ax-HE40 MCS0	155	5775	Not Required	14.30	Not Required
	149	5745	Not Required	14.30	Not Required
802.11ax-HE80 MCS0	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
	151	5755	Not Required	14.30	Not Required
802.11be-EHT20 MCS0	159	5795	Not Required	14.30	Not Required
	155	5775	Not Required	14.30	Not Required
802.11be-EHT40 MCS0	149	5745	Not Required	14.30	Not Required
	157	5785	Not Required	14.30	Not Required
	165	5825	Not Required	14.30	Not Required
802.11be-EHT80 MCS0	151	5755	Not Required	14.30	Not Required
	159	5795	Not Required	14.30	Not Required
802.11be-EHT80 MCS0	155	5775	Not Required	14.30	Not Required
	151	5755	Not Required	14.30	Not Required

<5.2GHz WLAN_FCC_Ant 6_DSI 0>

5.2GHz WLAN_FCC_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	18.78	19.00	99.32
	40	5200	18.59	19.00	99.32
	44	5220	18.44	18.50	99.32
	48	5240	18.42	18.50	99.32
802.11n-HT20 MCS0	36	5180	19.16	19.50	100.00
	40	5200	19.09	19.50	100.00
	44	5220	18.93	19.00	100.00
	48	5240	18.99	19.00	100.00
802.11n-HT40 MCS0	38	5190	19.21	19.50	100.00
	46	5230	18.95	19.00	100.00
802.11ac-VHT20 MCS0	36	5180	19.22	19.50	100.00
	40	5200	19.14	19.50	100.00
	44	5220	18.99	19.00	100.00
	48	5240	19.05	19.50	100.00
802.11ac-VHT40 MCS0	38	5190	19.25	19.50	100.00
	46	5230	19.01	19.50	100.00
802.11ac-VHT80 MCS0	42	5210	18.94	19.00	100.00
802.11ax-HE20 MCS0	36	5180	19.26	19.50	100.00
	40	5200	19.18	19.50	100.00
	44	5220	19.02	19.50	100.00
	48	5240	19.11	19.50	100.00
802.11ax-HE40 MCS0	38	5190	19.30	19.50	100.00
	46	5230	19.08	19.50	100.00
802.11ax-HE80 MCS0	42	5210	18.97	19.00	100.00
802.11be-EHT20 MCS0	36	5180	19.33	19.50	100.00
	40	5200	19.24	19.50	100.00
	44	5220	19.08	19.50	100.00
	48	5240	19.15	19.50	100.00
802.11be-EHT40 MCS0	38	5190	19.36	19.50	100.00
	46	5230	19.12	19.50	100.00
802.11be-EHT80 MCS0	42	5210	19.03	19.50	100.00



<5.3GHz WLAN_Ant 6_DSI 0>

5.3GHz WLAN_FCC_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	18.54	19.00	99.32
	56	5280	18.09	18.50	99.32
	60	5300	18.21	18.50	99.32
	64	5320	18.61	19.00	99.32
802.11n-HT20 MCS0	52	5260	18.83	19.00	100.00
	56	5280	19.09	19.50	100.00
	60	5300	18.71	19.00	100.00
	64	5320	19.42	19.50	100.00
802.11n-HT40 MCS0	54	5270	18.99	19.00	100.00
	62	5310	19.26	19.50	100.00
802.11ac-VHT20 MCS0	52	5260	18.88	19.00	100.00
	56	5280	19.18	19.50	100.00
	60	5300	18.73	19.00	100.00
	64	5320	19.46	19.50	100.00
802.11ac-VHT40 MCS0	54	5270	19.06	19.50	100.00
	62	5310	19.31	19.50	100.00
802.11ac-VHT80 MCS0	58	5290	19.25	19.50	100.00
802.11ac-VHT160 MCS0	50	5250	17.58	18.00	100.00
802.11ax-HE20 MCS0	52	5260	18.95	19.00	100.00
	56	5280	19.26	19.50	100.00
	60	5300	18.75	19.00	100.00
	64	5320	19.56	20.00	100.00
802.11ax-HE40 MCS0	54	5270	19.12	19.50	100.00
	62	5310	19.38	19.50	100.00
802.11ax-HE80 MCS0	58	5290	19.33	19.50	100.00
802.11ax-HE160 MCS0	50	5250	17.62	18.00	100.00
802.11be-EHT20 MCS0	52	5260	19.03	19.50	100.00
	56	5280	19.34	19.50	100.00
	60	5300	18.77	19.00	100.00
	64	5320	19.63	20.00	100.00
802.11be-EHT40 MCS0	54	5270	19.15	19.50	100.00
	62	5310	19.42	19.50	100.00
802.11be-EHT80 MCS0	58	5290	19.38	19.50	100.00
802.11be-EHT160 MCS0	50	5250	17.67	18.00	100.00

<5.5GHz WLAN_Ant 6_DSI 0>

5.5GHz WLAN_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	18.92	19.00	99.32
	116	5580	19.42	19.50	99.32
	124	5620	19.41	19.50	99.32
	132	5660	19.52	20.00	99.32
	144	5720	19.28	19.50	99.32
802.11n-HT20 MCS0	100	5500	18.71	19.00	100.00
	116	5580	19.16	19.50	100.00
	124	5620	19.12	19.50	100.00
	132	5660	19.24	19.50	100.00
	144	5720	19.42	19.50	100.00
802.11n-HT40 MCS0	102	5510	18.77	19.00	100.00
	110	5550	18.85	19.00	100.00
	126	5630	19.24	19.50	100.00



	134	5670	19.19	19.50	100.00
	142	5710	18.89	19.00	100.00
802.11ac-VHT20 MCS0	100	5500	18.79	19.00	100.00
	116	5580	19.22	19.50	100.00
	124	5620	19.19	19.50	100.00
	132	5660	19.38	19.50	100.00
	144	5720	19.46	19.50	100.00
802.11ac-VHT40 MCS0	102	5510	18.82	19.00	100.00
	110	5550	18.91	19.00	100.00
	126	5630	19.33	19.50	100.00
	134	5670	19.34	19.50	100.00
	142	5710	18.93	19.00	100.00
802.11ac-VHT80 MCS0	106	5530	18.82	19.00	100.00
	122	5610	19.18	19.50	100.00
	138	5690	19.42	19.50	100.00
802.11ac-VHT160 MCS0	114	5570	17.51	18.00	100.00
802.11ax-HE20 MCS0	100	5500	18.82	19.00	100.00
	116	5580	19.29	19.50	100.00
	124	5620	19.27	19.50	100.00
	132	5660	19.42	19.50	100.00
	144	5720	19.52	20.00	100.00
802.11ax-HE40 MCS0	102	5510	18.85	19.00	100.00
	110	5550	18.94	19.00	100.00
	126	5630	19.36	19.50	100.00
	134	5670	19.40	19.50	100.00
	142	5710	18.96	19.00	100.00
802.11ax-HE80 MCS0	106	5530	18.87	19.00	100.00
	122	5610	19.26	19.50	100.00
	138	5690	19.48	19.50	100.00
802.11ax-HE160 MCS0	114	5570	17.54	18.00	100.00
802.11be-EHT20 MCS0	100	5500	18.88	19.00	100.00
	116	5580	19.33	19.50	100.00
	124	5620	19.32	19.50	100.00
	132	5660	19.47	19.50	100.00
	144	5720	19.55	20.00	100.00
802.11be-EHT40 MCS0	102	5510	18.88	19.00	100.00
	110	5550	18.98	19.00	100.00
	126	5630	19.39	19.50	100.00
	134	5670	19.44	19.50	100.00
	142	5710	19.00	19.00	100.00
802.11be-EHT80 MCS0	106	5530	18.92	19.00	100.00
	122	5610	19.34	19.50	100.00
	138	5690	19.53	20.00	100.00
802.11be-EHT160 MCS0	114	5570	17.58	18.00	100.00

<5.8GHz WLAN_Ant 6_DSI 0>

5.8GHz WLAN_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	19.32	19.50	99.32
	157	5785	19.30	19.50	99.32
	165	5825	19.15	19.50	99.32
802.11n-HT20 MCS0	149	5745	19.11	19.50	100.00
	157	5785	19.02	19.50	100.00
	165	5825	18.95	19.00	100.00
802.11n-HT40 MCS0	151	5755	19.06	19.50	100.00



	159	5795	18.89	19.00	100.00
802.11ac-VHT20 MCS0	149	5745	19.16	19.50	100.00
	157	5785	19.08	19.50	100.00
	165	5825	19.02	19.50	100.00
	151	5755	19.15	19.50	100.00
802.11ac-VHT40 MCS0	159	5795	19.11	19.50	100.00
802.11ac-VHT80 MCS0	155	5775	19.08	19.50	100.00
802.11ax-HE20 MCS0	149	5745	19.21	19.50	100.00
	157	5785	19.14	19.50	100.00
	165	5825	19.08	19.50	100.00
802.11ax-HE40 MCS0	151	5755	19.21	19.50	100.00
802.11ax-HE80 MCS0	159	5795	19.20	19.50	100.00
	155	5775	19.12	19.50	100.00
802.11be-EHT20 MCS0	149	5745	19.28	19.50	100.00
	157	5785	19.17	19.50	100.00
	165	5825	19.19	19.50	100.00
802.11be-EHT40 MCS0	151	5755	19.24	19.50	100.00
802.11be-EHT80 MCS0	159	5795	19.24	19.50	100.00
	155	5775	19.19	19.50	100.00

<5.2GHz WLAN_FCC_Ant 7_DSI 0>

5.2GHz WLAN_FCC_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	18.97	19.00	98.97
	40	5200	18.83	19.00	98.97
	44	5220	18.86	19.00	98.97
	48	5240	18.77	19.00	98.97
802.11n-HT20 MCS0	36	5180	19.18	19.50	100.00
	40	5200	19.22	19.50	100.00
	44	5220	19.19	19.50	100.00
	48	5240	19.15	19.50	100.00
802.11n-HT40 MCS0	38	5190	19.09	19.50	100.00
	46	5230	19.22	19.50	100.00
802.11ac-VHT20 MCS0	36	5180	19.27	19.50	100.00
	40	5200	19.26	19.50	100.00
	44	5220	19.31	19.50	100.00
	48	5240	19.23	19.50	100.00
802.11ac-VHT40 MCS0	38	5190	19.20	19.50	100.00
	46	5230	19.29	19.50	100.00
802.11ac-VHT80 MCS0	42	5210	19.33	19.50	100.00
802.11ax-HE20 MCS0	36	5180	19.33	19.50	100.00
	40	5200	19.30	19.50	100.00
	44	5220	19.34	19.50	100.00
	48	5240	19.26	19.50	100.00
802.11ax-HE40 MCS0	38	5190	19.27	19.50	100.00
	46	5230	19.35	19.50	100.00
802.11ax-HE80 MCS0	42	5210	19.39	19.50	100.00
802.11be-EHT20 MCS0	36	5180	19.37	19.50	100.00
	40	5200	19.36	19.50	100.00



	44	5220	19.39	19.50	100.00
	48	5240	19.33	19.50	100.00
802.11be-EHT40 MCS0	38	5190	19.30	19.50	100.00
	46	5230	19.38	19.50	100.00
802.11be-EHT80 MCS0	42	5210	19.45	19.50	100.00

<5.3GHz WLAN_Ant 7_DSI 0>

5.3GHz WLAN_FCC_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	18.90	19.00	98.97
	56	5280	18.32	18.50	98.97
	60	5300	18.17	18.50	98.97
	64	5320	18.05	18.50	98.97
802.11n-HT20 MCS0	52	5260	19.05	19.50	100.00
	56	5280	19.01	19.50	100.00
	60	5300	18.54	19.00	100.00
	64	5320	18.82	19.00	100.00
802.11n-HT40 MCS0	54	5270	19.15	19.50	100.00
	62	5310	18.88	19.00	100.00
802.11ac-VHT20 MCS0	52	5260	19.14	19.50	100.00
	56	5280	19.08	19.50	100.00
	60	5300	18.56	19.00	100.00
	64	5320	18.87	19.00	100.00
802.11ac-VHT40 MCS0	54	5270	19.18	19.50	100.00
	62	5310	18.94	19.00	100.00
802.11ac-VHT80 MCS0	58	5290	19.02	19.50	100.00
802.11ac-VHT160 MCS0	50	5250	18.31	18.50	100.00
802.11ax-HE20 MCS0	52	5260	19.21	19.50	100.00
	56	5280	19.17	19.50	100.00
	60	5300	18.58	19.00	100.00
	64	5320	18.90	19.00	100.00
802.11ax-HE40 MCS0	54	5270	19.23	19.50	100.00
	62	5310	19.00	19.00	100.00
802.11ax-HE80 MCS0	58	5290	19.11	19.50	100.00
802.11ax-HE160 MCS0	50	5250	18.35	18.50	100.00
802.11be-EHT20 MCS0	52	5260	19.24	19.50	100.00
	56	5280	19.23	19.50	100.00
	60	5300	18.63	19.00	100.00
	64	5320	18.94	19.00	100.00
802.11be-EHT40 MCS0	54	5270	19.28	19.50	100.00
	62	5310	19.06	19.50	100.00
802.11be-EHT80 MCS0	58	5290	19.16	19.50	100.00
802.11be-EHT160 MCS0	50	5250	18.38	18.50	100.00

<5.5GHz WLAN_Ant 7_DSI 0>

5.5GHz WLAN_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	19.46	19.50	98.97
	116	5580	19.07	19.50	98.97
	124	5620	19.13	19.50	98.97
	132	5660	19.12	19.50	98.97
	144	5720	19.11	19.50	98.97
802.11n-HT20 MCS0	100	5500	19.26	19.50	100.00
	116	5580	18.97	19.00	100.00



	124	5620	18.91	19.00	100.00
	132	5660	18.88	19.00	100.00
	144	5720	19.03	19.50	100.00
802.11n-HT40 MCS0	102	5510	19.24	19.50	100.00
	110	5550	19.08	19.50	100.00
	126	5630	18.85	19.00	100.00
	134	5670	18.92	19.00	100.00
	142	5710	18.77	19.00	100.00
802.11ac-VHT20 MCS0	100	5500	19.37	19.50	100.00
	116	5580	19.01	19.50	100.00
	124	5620	18.96	19.00	100.00
	132	5660	18.95	19.00	100.00
	144	5720	19.11	19.50	100.00
802.11ac-VHT40 MCS0	102	5510	19.32	19.50	100.00
	110	5550	19.11	19.50	100.00
	126	5630	18.93	19.00	100.00
	134	5670	18.98	19.00	100.00
	142	5710	18.86	19.00	100.00
802.11ac-VHT80 MCS0	106	5530	19.26	19.50	100.00
	122	5610	19.03	19.50	100.00
	138	5690	19.22	19.50	100.00
802.11ac-VHT160 MCS0	114	5570	17.34	17.50	100.00
802.11ax-HE20 MCS0	100	5500	19.40	19.50	100.00
	116	5580	19.03	19.50	100.00
	124	5620	19.05	19.50	100.00
	132	5660	19.01	19.50	100.00
	144	5720	19.15	19.50	100.00
802.11ax-HE40 MCS0	102	5510	19.41	19.50	100.00
	110	5550	19.19	19.50	100.00
	126	5630	18.98	19.00	100.00
	134	5670	19.05	19.50	100.00
	142	5710	18.92	19.00	100.00
802.11ax-HE80 MCS0	106	5530	19.30	19.50	100.00
	122	5610	19.12	19.50	100.00
	138	5690	19.28	19.50	100.00
802.11ax-HE160 MCS0	114	5570	17.39	17.50	100.00
802.11be-EHT20 MCS0	100	5500	19.42	19.50	100.00
	116	5580	19.08	19.50	100.00
	124	5620	19.09	19.50	100.00
	132	5660	19.06	19.50	100.00
	144	5720	19.20	19.50	100.00
802.11be-EHT40 MCS0	102	5510	19.44	19.50	100.00
	110	5550	19.23	19.50	100.00
	126	5630	19.02	19.50	100.00
	134	5670	19.08	19.50	100.00
	142	5710	18.98	19.00	100.00
802.11be-EHT80 MCS0	106	5530	19.37	19.50	100.00
	122	5610	19.16	19.50	100.00
	138	5690	19.31	19.50	100.00
802.11be-EHT160 MCS0	114	5570	17.41	17.50	100.00



<5.8GHz WLAN_Ant 7_DSI 0>

5.8GHz WLAN_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	19.27	19.50	98.97
	157	5785	19.26	19.50	98.97
	165	5825	19.19	19.50	98.97
802.11n-HT20 MCS0	149	5745	18.92	19.00	100.00
	157	5785	19.01	19.50	100.00
	165	5825	18.96	19.00	100.00
802.11n-HT40 MCS0	151	5755	18.92	19.00	100.00
	159	5795	18.97	19.00	100.00
802.11ac-VHT20 MCS0	149	5745	19.03	19.50	100.00
	157	5785	19.12	19.50	100.00
	165	5825	19.04	19.50	100.00
802.11ac-VHT40 MCS0	151	5755	18.99	19.00	100.00
	159	5795	19.05	19.50	100.00
802.11ac-VHT80 MCS0	155	5775	19.13	19.50	100.00
802.11ax-HE20 MCS0	149	5745	19.09	19.50	100.00
	157	5785	19.14	19.50	100.00
	165	5825	19.07	19.50	100.00
802.11ax-HE40 MCS0	151	5755	19.12	19.50	100.00
	159	5795	19.15	19.50	100.00
802.11ax-HE80 MCS0	155	5775	19.25	19.50	100.00
802.11be-EHT20 MCS0	149	5745	19.15	19.50	100.00
	157	5785	19.21	19.50	100.00
	165	5825	19.12	19.50	100.00
802.11be-EHT40 MCS0	151	5755	19.18	19.50	100.00
	159	5795	19.19	19.50	100.00
802.11be-EHT80 MCS0	155	5775	19.30	19.50	100.00

<5.2GHz WLAN_FCC_Ant MIMO_DSI 0>

5.2GHz WLAN_FCC_Ant MIMO_DSI 0			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	36	5180	21.89	22.00	99.32
	40	5200	21.72	22.00	99.32
	44	5220	21.67	22.00	99.32
	48	5240	21.61	22.00	99.32
802.11n-HT20 MCS0	36	5180	22.18	22.50	100.00
	40	5200	22.17	22.50	100.00
	44	5220	22.07	22.50	100.00
	48	5240	22.08	22.50	100.00
802.11n-HT40 MCS0	38	5190	22.16	22.50	100.00
	46	5230	22.10	22.50	100.00
802.11ac-VHT20 MCS0	36	5180	22.26	22.50	100.00
	40	5200	22.21	22.50	100.00
	44	5220	22.16	22.50	100.00
	48	5240	22.15	22.50	100.00
802.11ac-VHT40 MCS0	38	5190	22.24	22.50	100.00
	46	5230	22.16	22.50	100.00
802.11ac-VHT80 MCS0	42	5210	22.15	22.50	100.00
802.11ax-HE20 MCS0	36	5180	22.31	22.50	100.00
	40	5200	22.25	22.50	100.00
	44	5220	22.19	22.50	100.00
	48	5240	22.20	22.50	100.00



802.11ax-HE40 MCS0	38	5190	22.30	22.50	100.00
	46	5230	22.23	22.50	100.00
802.11ax-HE80 MCS0	42	5210	22.20	22.50	100.00
802.11be-EHT20 MCS0	36	5180	22.36	22.50	100.00
	40	5200	22.31	22.50	100.00
	44	5220	22.25	22.50	100.00
	48	5240	22.25	22.50	100.00
802.11be-EHT40 MCS0	38	5190	22.34	22.50	100.00
	46	5230	22.26	22.50	100.00
802.11be-EHT80 MCS0	42	5210	22.26	22.50	100.00

<5.3GHz WLAN_Ant MIMO_DSI 0>

5.3GHz WLAN_FCC_Ant MIMO_DSI 0			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	52	5260	21.74	22.00	99.32
	56	5280	21.22	21.50	99.32
	60	5300	21.20	21.50	99.32
	64	5320	21.35	21.50	99.32
802.11n-HT20 MCS0	52	5260	21.95	22.00	100.00
	56	5280	22.06	22.50	100.00
	60	5300	21.64	22.00	100.00
	64	5320	22.14	22.50	100.00
802.11n-HT40 MCS0	54	5270	22.08	22.50	100.00
	62	5310	22.08	22.50	100.00
802.11ac-VHT20 MCS0	52	5260	22.02	22.50	100.00
	56	5280	22.14	22.50	100.00
	60	5300	21.66	22.00	100.00
	64	5320	22.19	22.50	100.00
802.11ac-VHT40 MCS0	54	5270	22.13	22.50	100.00
	62	5310	22.14	22.50	100.00
802.11ac-VHT80 MCS0	58	5290	22.15	22.50	100.00
802.11ac-VHT160 MCS0	50	5250	20.97	21.00	100.00
802.11ax-HE20 MCS0	52	5260	22.09	22.50	100.00
	56	5280	22.23	22.50	100.00
	60	5300	21.68	22.00	100.00
	64	5320	22.25	22.50	100.00
802.11ax-HE40 MCS0	54	5270	22.19	22.50	100.00
	62	5310	22.20	22.50	100.00
802.11ax-HE80 MCS0	58	5290	22.23	22.50	100.00
802.11ax-HE160 MCS0	50	5250	21.01	21.50	100.00
802.11be-EHT20 MCS0	52	5260	22.15	22.50	100.00
	56	5280	22.30	22.50	100.00
	60	5300	21.71	22.00	100.00
	64	5320	22.31	22.50	100.00
802.11be-EHT40 MCS0	54	5270	22.23	22.50	100.00
	62	5310	22.25	22.50	100.00
802.11be-EHT80 MCS0	58	5290	22.28	22.50	100.00
802.11be-EHT160 MCS0	50	5250	21.05	21.50	100.00



<5.5GHz WLAN_Ant MIMO_DSI 0>

5.5GHz WLAN_Ant MIMO_DSI 0			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	100	5500	22.21	22.50	99.32
	116	5580	22.26	22.50	99.32
	124	5620	22.28	22.50	99.32
	132	5660	22.34	22.50	99.32
	144	5720	22.21	22.50	99.32
802.11n-HT20 MCS0	100	5500	22.00	22.00	100.00
	116	5580	22.08	22.50	100.00
	124	5620	22.03	22.50	100.00
	132	5660	22.07	22.50	100.00
	144	5720	22.24	22.50	100.00
802.11n-HT40 MCS0	102	5510	22.02	22.50	100.00
	110	5550	21.98	22.00	100.00
	126	5630	22.06	22.50	100.00
	134	5670	22.07	22.50	100.00
	142	5710	21.84	22.00	100.00
802.11ac-VHT20 MCS0	100	5500	22.10	22.50	100.00
	116	5580	22.13	22.50	100.00
	124	5620	22.09	22.50	100.00
	132	5660	22.18	22.50	100.00
	144	5720	22.30	22.50	100.00
802.11ac-VHT40 MCS0	102	5510	22.09	22.50	100.00
	110	5550	22.02	22.50	100.00
	126	5630	22.14	22.50	100.00
	134	5670	22.17	22.50	100.00
	142	5710	21.91	22.00	100.00
802.11ac-VHT80 MCS0	106	5530	22.06	22.50	100.00
	122	5610	22.12	22.50	100.00
	138	5690	22.33	22.50	100.00
802.11ac-VHT160 MCS0	114	5570	20.44	20.50	100.00
802.11ax-HE20 MCS0	100	5500	22.13	22.50	100.00
	116	5580	22.17	22.50	100.00
	124	5620	22.17	22.50	100.00
	132	5660	22.23	22.50	100.00
	144	5720	22.35	22.50	100.00
802.11ax-HE40 MCS0	102	5510	22.15	22.50	100.00
	110	5550	22.08	22.50	100.00
	126	5630	22.18	22.50	100.00
	134	5670	22.24	22.50	100.00
	142	5710	21.95	22.00	100.00
802.11ax-HE80 MCS0	106	5530	22.10	22.50	100.00
	122	5610	22.20	22.50	100.00
	138	5690	22.39	22.50	100.00
802.11ax-HE160 MCS0	114	5570	20.48	20.50	100.00
802.11be-EHT20 MCS0	100	5500	22.17	22.50	100.00
	116	5580	22.22	22.50	100.00
	124	5620	22.22	22.50	100.00
	132	5660	22.28	22.50	100.00
	144	5720	22.39	22.50	100.00
802.11be-EHT40 MCS0	102	5510	22.18	22.50	100.00
	110	5550	22.12	22.50	100.00
	126	5630	22.22	22.50	100.00
	134	5670	22.27	22.50	100.00



	142	5710	22.00	22.00	100.00
802.11be-EHT80 MCS0	106	5530	22.16	22.50	100.00
	122	5610	22.26	22.50	100.00
	138	5690	22.43	22.50	100.00
	114	5570	20.51	21.00	100.00

<5.8GHz WLAN_Ant MIMO_DSI 0>

5.8GHz WLAN_Ant MIMO_DSI 0			Ant MIMO		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a 6Mbps	149	5745	22.31	22.50	99.32
	157	5785	22.29	22.50	99.32
	165	5825	22.18	22.50	99.32
802.11n-HT20 MCS0	149	5745	22.03	22.50	100.00
	157	5785	22.03	22.50	100.00
	165	5825	21.97	22.00	100.00
802.11n-HT40 MCS0	151	5755	22.00	22.00	100.00
	159	5795	21.94	22.00	100.00
802.11ac-VHT20 MCS0	149	5745	22.11	22.50	100.00
	157	5785	22.11	22.50	100.00
	165	5825	22.04	22.50	100.00
802.11ac-VHT40 MCS0	151	5755	22.08	22.50	100.00
	159	5795	22.09	22.50	100.00
802.11ac-VHT80 MCS0	155	5775	22.12	22.50	100.00
802.11ax-HE20 MCS0	149	5745	22.16	22.50	100.00
	157	5785	22.15	22.50	100.00
	165	5825	22.09	22.50	100.00
802.11ax-HE40 MCS0	151	5755	22.18	22.50	100.00
	159	5795	22.19	22.50	100.00
802.11ax-HE80 MCS0	155	5775	22.20	22.50	100.00
802.11be-EHT20 MCS0	149	5745	22.23	22.50	100.00
	157	5785	22.20	22.50	100.00
	165	5825	22.17	22.50	100.00
802.11be-EHT40 MCS0	151	5755	22.22	22.50	100.00
	159	5795	22.23	22.50	100.00
802.11be-EHT80 MCS0	155	5775	22.26	22.50	100.00

<WiFi 6E> Standard client

	Band	Mode	Channel	Frequency (MHz)	Ant 6 For Default / Full Power&DSI0		Ant 6 For DSI 3		Ant 7 For Default / Full Power&DSI0		Ant 7 For DSI 3		Ant 6+7 For Default / Full Power&DSI0		Ant 6+7 For DSI 3		Duty Cycle %
					Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
WiFi 6E	UNII 5 (5.925-6.425GHz)	802.11a 6Mbps	1	5955	19.12	19.50	Not Required	13.50	19.41	19.50	Not Required	12.00	22.28	22.50	Not Required	15.80	98.97
			49	6195	19.31	19.50		13.50	18.99	19.00		12.00	22.17	22.50		15.80	
			93	6415	19.36	19.50		13.50	19.20	19.50		12.00	22.30	22.50		15.80	
		802.11ax-HE20 MCS0	1	5955	19.02	19.50		13.50	19.21	19.50		12.00	22.13	22.50		15.80	100.00
			49	6195	19.17	19.50		13.50	18.94	19.00		12.00	22.07	22.50		15.80	
			93	6415	19.33	19.50		13.50	19.00	19.00		12.00	22.18	22.50		15.80	
		802.11ax-HE40 MCS0	3	5965	19.06	19.50		13.50	19.31	19.50		12.00	22.20	22.50		15.80	100.00
			51	6205	19.25	19.50		13.50	18.98	19.00		12.00	22.13	22.50		15.80	
			91	6405	19.27	19.50		13.50	19.09	19.50		12.00	22.19	22.50		15.80	
		802.11ax-HE80 MCS0	7	5985	19.06	19.50		13.50	19.13	19.50		12.00	22.11	22.50		15.80	100.00
			55	6225	19.34	19.50		13.50	19.05	19.50		12.00	22.21	22.50		15.80	
			87	6385	19.23	19.50		13.50	19.17	19.50		12.00	22.21	22.50		15.80	
		802.11ax-HE160	15	6025	19.05	19.50		13.50	18.89	19.00		12.00	21.98	22.00		15.80	100.00



FCC SAR Test Report

Report No. : FA551202-09

		MCS0	47	6185	18.75	19.00		13.50	18.71	19.00		12.00	21.74	22.00		15.80	100.00
		802.11be-EHT20 MCS0	1	5955	19.08	19.50		13.50	19.26	19.50		12.00	22.18	22.50		15.80	
			49	6195	19.28	19.50		13.50	19.02	19.50		12.00	22.16	22.50		15.80	
			93	6415	19.40	19.50		13.50	19.09	19.50		12.00	22.26	22.50		15.80	
		802.11be-EHT40 MCS0	3	5965	19.11	19.50		13.50	19.38	19.50		12.00	22.26	22.50		15.80	100.00
			51	6205	19.32	19.50		13.50	19.09	19.50		12.00	22.22	22.50		15.80	
			91	6405	19.32	19.50		13.50	19.18	19.50		12.00	22.26	22.50		15.80	
		802.11be-EHT80 MCS0	7	5985	19.14	19.50		13.50	19.26	19.50		12.00	22.21	22.50		15.80	100.00
			55	6225	19.42	19.50		13.50	19.21	19.50		12.00	22.33	22.50		15.80	
			87	6385	19.33	19.50		13.50	19.29	19.50		12.00	22.32	22.50		15.80	
		802.11be-EHT160 MCS0	15	6025	19.11	19.50		13.50	18.95	19.00		12.00	22.04	22.50		15.80	100.00
			47	6185	18.82	19.00		13.50	18.78	19.00		12.00	21.81	22.00		15.80	
			79	6345	18.91	19.00		13.50	18.97	19.00		12.00	21.95	22.00		15.80	
		802.11be-EHT320 MCS0	31	6105	19.03	19.50	13.05	13.50	19.30	19.50	11.81	12.00	22.18	22.50	15.48	15.80	100.00
			63	6265	19.60	20.00	13.11	13.50	19.36	19.50	11.41	11.50	22.49	22.50	15.35	15.60	
			95	6425	19.84	20.00	13.41	13.50	19.58	20.00	11.63	12.00	22.72	23.00	15.62	15.80	
	UNII 7 (6.525-6.885GHz)	802.11a 6Mbps	117	6535	19.55	20.00	Not Required	12.50	19.20	19.50	Not Required	12.00	22.39	22.50	Not Required	15.30	98.97
			149	6695	19.47	19.50		12.50	19.45	19.50		12.00	22.48	22.50		15.30	
			173	6815	18.71	19.00		12.50	19.10	19.50		12.00	21.92	22.00		15.30	
		802.11ax-HE20 MCS0	117	6535	19.51	20.00		12.50	19.11	19.50		12.00	22.32	22.50		15.30	100.00
			149	6695	19.37	19.50		12.50	19.32	19.50		12.00	22.36	22.50		15.30	
			173	6815	18.60	19.00		12.50	18.96	19.00		12.00	21.79	22.00		15.30	
		802.11ax-HE40 MCS0	123	6565	18.95	19.00		12.50	19.16	19.50		12.00	22.07	22.50		15.30	100.00
			147	6685	19.30	19.50		12.50	19.41	19.50		12.00	22.37	22.50		15.30	
			179	6845	18.67	19.00		12.50	18.93	19.00		12.00	21.81	22.00		15.30	
		802.11ax-HE80 MCS0	135	6625	19.02	19.50		12.50	19.15	19.50		12.00	22.10	22.50		15.30	100.00
			151	6705	19.28	19.50		12.50	19.36	19.50		12.00	22.33	22.50		15.30	
			167	6785	19.07	19.50		12.50	19.19	19.50		12.00	22.14	22.50		15.30	
		802.11ax-HE160 MCS0	143	6665	18.92	19.00	12.39	12.50	19.10	19.50	11.51	12.00	22.02	22.50	14.98	15.30	100.00
		802.11be-EHT20 MCS0	117	6535	19.56	20.00	Not Required	12.50	19.14	19.50	Not Required	12.00	22.37	22.50	Not Required	15.30	100.00
			149	6695	19.43	19.50		12.50	19.39	19.50		12.00	22.42	22.50		15.30	
			173	6815	18.65	19.00		12.50	19.01	19.50		12.00	21.84	22.00		15.30	
		802.11be-EHT40 MCS0	123	6565	19.02	19.50		12.50	19.22	19.50		12.00	22.13	22.50		15.30	100.00
			147	6685	19.35	19.50		12.50	19.46	19.50		12.00	22.42	22.50		15.30	
			179	6845	18.72	19.00		12.50	19.06	19.50		12.00	21.90	22.00		15.30	
		802.11be-EHT80 MCS0	135	6625	19.08	19.50		12.50	19.23	19.50		12.00	22.17	22.50		15.30	100.00
			151	6705	19.34	19.50		12.50	19.42	19.50		12.00	22.39	22.50		15.30	
			167	6785	19.11	19.50		12.50	19.34	19.50		12.00	22.24	22.50		15.30	
		802.11be-EHT160 MCS0	143	6665	18.95	19.00		12.50	19.17	19.50		12.00	22.07	22.50		15.30	100.00

<WiFi 6E> indoor client

WiFi 6E	Band	Mode	Channel	Frequency (MHz)	Ant 6 For Default / Full Power&DSI0		Ant 6 Sensor on DSI 3		Ant 7 For Default / Full Power&DSI0		Ant 7 Sensor on DSI 3		Ant 6+7 For Default / Full Power&DSI0		Ant 6+7 Sensor on DSI 3		Duty Cycle %
					Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	UNII 5 (5.925-6.425GHz)	802.11a 6Mbps	1	5955	3.99	4.00	Not Required	4.00	4.12	4.50	Not Required	4.50	7.07	7.50	Not Required	7.30	98.97
			49	6195	3.95	4.00		4.00	4.28	4.50		4.50	7.13	7.50		7.30	
			93	6415	4.16	4.50		4.50	4.12	4.50		4.50	7.16	7.50		7.50	
		802.11ax-HE20 MCS0	1	5955	7.28	7.50		7.50	8.15	8.50		8.50	10.75	11.00		11.00	100.00
			49	6195	7.00	7.00		7.00	7.48	7.50		7.50	10.26	10.50		10.30	
			93	6415	6.75	7.00		7.00	7.78	8.00		8.00	10.31	10.50		10.50	
		802.11ax-HE40 MCS0	3	5965	10.50	10.50		10.50	10.83	11.00		11.00	13.68	14.00		13.80	100.00
			51	6205	10.43	10.50		10.50	10.53	11.00		11.00	13.49	13.50		13.80	
			91	6405	10.02	10.50		10.50	10.57	11.00		11.00	13.31	13.50		13.80	
		802.11ax-HE80	7	5985	13.44	13.50		13.50	13.61	14.00		12.00	16.54	17.00		15.80	100.00



FCC SAR Test Report

Report No. : FA551202-09

		MCS0	55	6225	12.64	13.00		13.00	13.23	13.50		12.00	15.96	16.00		15.50		
			87	6385	12.83	13.00		13.00	13.52	14.00		12.00	16.20	16.50		15.50		
		802.11ax-HE160 MCS0	15	6025	15.94	16.00		13.50	16.07	16.50		12.00	19.02	19.50		15.80		100.00
			47	6185	15.63	16.00		13.00	16.01	16.50		12.00	18.83	19.00		15.50		
		802.11be-EHT20 MCS0	1	5955	7.32	7.50		7.50	8.24	8.50		8.50	10.81	11.00		11.00		100.00
			49	6195	7.07	7.50		7.50	7.52	8.00		8.00	10.31	10.50		10.80		
			93	6415	6.84	7.00		7.00	7.32	7.50		7.50	10.37	10.50		10.30		
		802.11be-EHT40 MCS0	3	5965	10.52	11.00		11.00	10.85	11.00		11.00	13.70	14.00		14.00		100.00
			51	6205	10.45	10.50		10.50	10.62	11.00		11.00	13.55	14.00		13.80		
			91	6405	10.05	10.50		10.50	10.63	11.00		11.00	13.36	13.50		13.80		
		802.11be-EHT80 MCS0	7	5985	13.51	14.00		13.50	13.69	14.00		12.00	16.61	17.00		15.80		100.00
			55	6225	12.71	13.00		13.00	13.27	13.50		12.00	16.01	16.50		15.50		
			87	6385	12.89	13.00		13.00	13.58	14.00		12.00	16.26	16.50		15.50		
		802.11be-EHT160 MCS0	15	6025	16.01	16.50		13.00	16.09	16.50		12.00	19.06	19.50		15.50		100.00
			47	6185	15.67	16.00		13.00	16.03	16.50		12.00	18.86	19.00		15.50		
			79	6345	15.52	16.00		13.00	16.02	16.50		12.00	18.79	19.00		15.50		
		802.11be-EHT320 MCS0	31	6105	18.32	18.50	12.91	13.00	18.28	18.50	11.79	12.00	21.31	21.50	15.40	15.50	100.00	
			63	6265	17.95	18.00	12.98	13.00	18.76	19.00	11.59	12.00	21.38	21.50	15.35	15.50		
			95	6425	18.18	18.50	13.05	13.50	18.72	19.00	11.69	12.00	21.47	21.50	15.36	15.80		
	UNII 6 (6.425-6.525GHz)	802.11a 6Mbps	97	6435	3.99	4.00	Not Required	4.00	3.97	4.00	Not Required	4.00	7.00	7.00	Not Required	7.00	98.97	
			105	6475	4.12	4.50		4.50	3.96	4.00		4.00	7.06	7.06		7.30		
			113	6515	3.92	4.00		4.00	4.05	4.50		4.50	7.00	7.00		7.30		
		802.11ax-HE20 MCS0	97	6435	6.64	7.00		7.00	7.58	8.00		8.00	10.15	10.50		10.50	100.00	
			105	6475	6.73	7.00		7.00	7.83	8.00		8.00	10.33	10.50		10.50		
			113	6515	6.51	7.00		7.00	7.80	8.00		8.00	10.21	10.50		10.50		
		802.11ax-HE40 MCS0	99	6445	10.04	10.50		10.50	10.48	10.50		10.50	13.28	13.50		13.50	100.00	
			115	6525	10.06	10.50		10.50	10.86	11.00		11.00	13.49	13.50		13.80		
		802.11ax-HE80 MCS0	103	6465	12.84	13.00		13.00	13.45	13.50		12.00	16.17	16.50		15.50	100.00	
			119	6545	12.85	13.00		13.00	13.58	14.00		12.00	16.24	16.50		15.50		
		802.11ax-HE160 MCS0	111	6505	15.20	15.50	Not Required	13.00	16.10	16.50	Not Required	12.00	18.68	19.00	Not Required	15.50	100.00	
		802.11be-EHT20 MCS0	97	6435	6.72	7.00	7.00	7.64	8.00	8.00	10.21	10.50	10.50	100.00				
			105	6475	6.75	7.00	7.00	7.88	8.00	8.00	10.36	10.50	10.50					
			113	6515	6.57	7.00	7.00	7.84	8.00	8.00	10.26	10.50	10.50					
		802.11be-EHT40 MCS0	99	6445	10.12	10.50	10.50	10.57	11.00	11.00	13.36	13.50	13.80	100.00				
			107	6485	10.11	10.50	10.50	10.64	11.00	11.00	13.39	13.50	13.80					
			115	6525	10.08	10.50	10.50	10.93	11.00	11.00	13.54	14.00	13.80					
		802.11be-EHT80 MCS0	103	6465	12.39	12.50	12.50	13.48	13.50	12.00	16.22	16.50	15.30	100.00				
			119	6545	12.92	13.00	13.00	13.65	14.00	12.00	16.31	16.50	15.50					
		802.11be-EHT160 MCS0	111	6505	15.28	15.50	13.00	16.13	16.50	12.00	18.74	19.00	15.50	100.00				
		802.11be-EHT320 MCS0	127	6585	18.46	18.50	12.53	13.00	19.03	19.50	11.52	12.00	21.76	22.00	15.06	15.50	100.00	
UNII 7 (6.525-6.885GHz)	802.11a 6Mbps	117	6535	4.65	5.00	Not Required	5.00	4.59	5.00	Not Required	5.00	7.64	8.00	Not Required	8.00	98.97		
		149	6695	4.46	4.50		4.50	4.58	5.00		5.00	7.54	8.00		7.80			
		173	6815	4.05	4.50		4.50	4.42	4.50		4.50	7.25	7.50		7.50			
	802.11ax-HE20 MCS0	117	6535	7.92	8.00		8.00	8.29	8.50		8.50	11.12	11.50		11.30	100.00		
		149	6695	8.09	8.50		8.50	7.87	8.00		8.00	10.99	11.00		11.30			
		173	6815	7.03	7.50		7.50	7.77	8.00		8.00	10.43	10.50		10.80			
	802.11ax-HE40 MCS0	123	6565	10.18	10.50		10.50	10.60	11.00		11.00	13.41	13.50		13.80	100.00		
		147	6685	10.53	11.00		11.00	10.70	11.00		11.00	13.63	14.00		14.00			
		179	6845	9.99	10.00		10.00	11.15	11.50		11.50	13.62	14.00		13.80			
	802.11ax-HE80 MCS0	135	6625	13.31	13.50		12.50	14.04	14.50		12.00	16.70	17.00		15.30	100.00		
		151	6705	13.51	14.00	12.50	13.88	14.00	12.00	16.71	17.00	15.30						
		167	6785	12.84	13.00	12.50	14.29	14.50	12.00	16.64	17.00	15.30						
	802.11ax-HE160 MCS0	143	6665	15.78	16.00	12.50	16.29	16.50	12.00	19.05	19.50	15.30	100.00					
	802.11be-EHT20 MCS0	117	6535	8.01	8.50	8.50	8.37	8.50	8.50	11.20	11.50	11.50	100.00					
		149	6695	8.11	8.50	8.50	7.91	8.00	8.00	11.02	11.50	11.30						



FCC SAR Test Report

Report No. : FA551202-09

UNII 8 (6.885-7.125GHz)	802.11be-EHT40 MCS0	173	6815	7.08	7.50		7.50	7.82	8.00		8.00	10.48	10.50		10.80	100.00				
		123	6565	10.23	10.50		10.50	10.65	11.00		11.00	13.46	13.50		13.80					
		147	6685	10.62	11.00		11.00	10.74	11.00		11.00	13.69	14.00		14.00					
		179	6845	10.07	10.50		10.50	11.21	11.50		11.50	13.69	14.00		14.00					
		135	6625	13.33	13.50		12.50	14.13	14.50		12.00	16.76	17.00		15.30	100.00				
		151	6705	13.55	14.00		12.50	13.93	14.00		12.00	16.75	17.00		15.30					
		167	6785	12.91	13.00		12.50	14.38	14.50		12.00	16.72	17.00		15.30					
		802.11be-EHT160 MCS0	143	6665	15.86		16.00	12.50	16.33		16.50	12.00	19.11		19.50	15.30	100.00			
		802.11be-EHT320 MCS0	159	6745	18.56		19.00	12.48	12.50		19.32	19.50	11.81		12.00	21.97	22.00	15.17	15.30	100.00
		802.11a 6Mbps	189	6895	4.13		4.50		4.50		4.07	4.50			4.50	7.12	7.50		7.50	98.97
	209		6995	4.42	4.50	4.50	4.73		5.00	5.00	7.59	8.00		7.80						
	229		7095	4.22	4.50	4.50	5.81		6.00	6.00	8.10	8.50		8.30						
	233		7115	3.97	4.00	4.00	4.78		5.00	5.00	7.41	7.50		7.50						
	802.11ax-HE20 MCS0		189	6895	7.53	8.00	8.00		7.85	8.00	8.00	10.70		11.00	11.00	100.00				
			209	6995	7.47	7.50	7.50		8.24	8.50	8.50	10.88		11.00	11.00					
			229	7095	7.69	8.00	8.00		8.92	9.00	9.00	11.36		11.50	11.50					
			233	7115	-5.42	-5.00	-5.00		-5.21	-5.00	-5.00	-2.30		-2.00	-2.00					
	802.11ax-HE40 MCS0		195	6925	10.52	11.00	11.00		11.18	11.50	11.50	13.87		14.00	14.30	100.00				
			211	7005	10.68	11.00	11.00		11.09	11.50	11.50	13.90		14.00	14.30					
			227	7085	10.84	11.00	11.00		11.76	12.00	12.00	14.33		14.50	14.50					
	802.11ax-HE80 MCS0		199	6945	12.91	13.00	Not Required		12.50	13.53	14.00	Not Required		12.00	16.24	16.50	Not Required		15.30	100.00
			215	7025	13.61	14.00			12.50	14.01	14.50			12.00	16.82	17.00			15.30	
	802.11ax-HE160 MCS0		207	6985	16.10	16.50			12.50	16.98	17.00			12.00	19.57	20.00			15.30	100.00
	802.11be-EHT20 MCS0		189	6895	7.58	8.00			8.00	7.91	8.00			8.00	10.76	11.00			11.00	100.00
			209	6995	7.52	8.00			8.00	8.28	8.50			8.50	10.93	11.00			11.30	
			229	7095	7.77	8.00			8.00	8.95	9.00			9.00	11.41	11.50			11.50	
			233	7115	-5.38	-5.00			-5.00	-5.19	-5.00			-5.00	-2.27	-2.00			-2.00	
	802.11be-EHT40 MCS0		195	6925	10.16	10.50			10.50	10.48	10.50			10.50	13.33	13.50			13.50	100.00
211			7005	10.77	11.00	11.00			11.15	11.50	11.50			13.97	14.00	14.30				
227		7085	10.91	11.00	11.00	11.85		12.00	12.00	14.42	14.50		14.50							
802.11be-EHT80 MCS0	199	6945	12.98	13.00	12.50	13.56		14.00	12.00	16.29	16.50		15.30	100.00						
	215	7025	13.67	14.00	12.50	14.03		14.50	12.00	16.86	17.00		15.30							
802.11be-EHT160 MCS0	207	6985	16.12	16.50		12.50		17.03	17.50		12.00		19.61	20.00		15.30		100.00		
802.11be-EHT320 MCS0	191	6905	17.36	17.50		12.48	12.50	17.93	18.00		11.59	12.00	20.66	21.00		15.07	15.30	100.00		

Very Low Power

	Band	Mode	Channel	Frequency (MHz)	Ant 6 For Default / Full Power&DSI0&3		Ant 7 For Default / Full Power&DSI0&3		Ant 6+7 For Default / Full Power&DSI0&3		Duty Cycle %
					Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
WiFi 6E	UNII 5 (5.925-6.425GHz)	802.11a 6Mbps	1	5955	0.49	0.50	0.71	1.00	3.62	4.00	98.97
			49	6195	-0.05	0.00	0.38	0.50	3.19	3.50	
			93	6415	0.31	0.50	0.52	1.00	3.43	3.50	
		802.11ax-HE20 MCS0	1	5955	3.21	3.50	3.48	3.50	6.36	6.50	100.00
			49	6195	3.25	3.50	3.66	4.00	6.47	6.50	
			93	6415	3.57	4.00	3.68	4.00	6.64	7.00	
		802.11ax-HE40 MCS0	3	5965	6.38	6.50	5.98	6.00	9.19	9.50	100.00
			51	6205	6.68	7.00	6.26	6.50	9.49	9.50	
			91	6405	5.86	6.00	6.62	7.00	9.27	9.50	
		802.11ax-HE80 MCS0	7	5985	9.56	10.00	9.40	9.50	12.49	12.50	100.00
			55	6225	8.05	8.50	8.93	9.00	11.52	12.00	



			87	6385	8.89	9.00	9.19	9.50	12.05	12.50	100.00
		802.11ax-HE160 MCS0	15	6025	10.24	10.50	10.49	10.50	13.38	13.50	
			47	6185	10.55	11.00	10.77	11.00	13.67	14.00	
		802.11be-EHT20 MCS0	1	5955	3.28	3.50	3.57	4.00	6.44	6.50	100.00
			49	6195	3.27	3.50	3.71	4.00	6.51	7.00	
			93	6415	3.64	4.00	3.71	4.00	6.69	7.00	
		802.11be-EHT40 MCS0	3	5965	6.47	6.50	6.04	6.50	9.27	9.50	100.00
			51	6205	6.74	7.00	6.33	6.50	9.55	10.00	
			91	6405	5.95	6.00	6.71	7.00	9.36	9.50	
		802.11be-EHT80 MCS0	7	5985	9.64	10.00	9.48	9.50	12.57	13.00	100.00
			55	6225	8.08	8.50	8.97	9.00	11.56	12.00	
			87	6385	8.98	9.00	9.22	9.50	12.11	12.50	
		802.11be-EHT160 MCS0	15	6025	10.29	10.50	10.57	11.00	13.44	13.50	100.00
			47	6185	10.57	11.00	10.82	11.00	13.71	14.00	
			79	6345	10.38	10.50	10.87	11.00	13.64	14.00	
		802.11be-EHT320 MCS0	31	6105	10.45	10.50	10.39	10.50	13.43	13.50	100.00
			63	6265	10.47	10.50	10.88	11.00	13.69	14.00	
			95	6425	10.17	10.50	10.47	10.50	13.33	13.50	
	UNII 6 (6.425-6.525GHz)	802.11a 6Mbps	97	6435	-0.21	0.00	0.09	0.50	2.96	3.00	98.97
			105	6475	0.01	0.50	0.50	0.50	3.28	3.50	
			113	6515	-0.21	0.00	0.46	0.50	3.15	3.50	
		802.11ax-HE20 MCS0	97	6435	3.51	4.00	3.61	4.00	6.57	7.00	100.00
			105	6475	3.58	4.00	3.84	4.00	6.72	7.00	
			113	6515	3.23	3.50	3.94	4.00	6.61	7.00	
		802.11ax-HE40 MCS0	99	6445	5.71	6.00	6.53	7.00	9.15	9.50	100.00
			115	6525	5.37	5.50	6.72	7.00	9.11	9.50	
		802.11ax-HE80 MCS0	103	6465	8.54	9.00	8.77	9.00	11.67	12.00	100.00
			119	6545	8.28	8.50	9.33	9.50	11.85	12.00	
		802.11ax-HE160 MCS0	111	6505	9.55	10.00	10.59	11.00	13.11	13.50	100.00
		802.11be-EHT20 MCS0	97	6435	3.54	4.00	3.63	4.00	6.60	7.00	100.00
			105	6475	3.63	4.00	3.91	4.00	6.78	7.00	
			113	6515	-0.17	0.00	0.35	0.50	3.11	3.50	
		802.11be-EHT40 MCS0	99	6445	5.75	6.00	6.61	7.00	9.21	9.50	100.00
			107	6485	5.75	6.00	6.83	7.00	9.33	9.50	
			115	6525	5.43	5.50	6.75	7.00	9.15	9.50	
		802.11be-EHT80 MCS0	103	6465	8.62	9.00	8.84	9.00	11.74	12.00	100.00
			119	6545	8.37	8.50	9.35	9.50	11.90	12.00	
		802.11be-EHT160 MCS0	111	6505	9.64	10.00	10.64	11.00	13.18	13.50	100.00
		802.11be-EHT320 MCS0	127	6585	10.07	10.50	10.59	11.00	13.35	13.50	100.00
	UNII 7 (6.525-6.885GHz)	802.11a 6Mbps	117	6535	0.73	1.00	0.66	1.00	3.71	4.00	98.97
			149	6695	0.55	1.00	1.47	1.50	4.05	4.50	
			173	6815	0.63	1.00	0.52	1.00	3.59	4.00	
		802.11ax-HE20 MCS0	117	6535	3.99	4.00	4.05	4.50	7.03	7.50	100.00
			149	6695	3.94	4.00	4.10	4.50	7.03	7.50	
			173	6815	2.96	3.00	3.87	4.00	6.45	6.50	
		802.11ax-HE40 MCS0	123	6565	6.05	6.50	7.06	7.50	9.59	10.00	100.00
			147	6685	5.97	6.00	6.67	7.00	9.34	9.50	
			179	6845	5.41	5.50	6.88	7.00	9.22	9.50	
		802.11ax-HE80 MCS0	135	6625	9.02	9.50	9.51	10.00	12.28	12.50	100.00
			151	6705	9.21	9.50	9.41	9.50	12.32	12.50	
			167	6785	8.61	9.00	9.79	10.00	12.25	12.50	
		802.11ax-HE160 MCS0	143	6665	10.68	11.00	10.79	11.00	13.75	14.00	100.00
		802.11be-EHT20 MCS0	117	6535	4.08	4.50	4.11	4.50	7.11	7.50	100.00
			149	6695	4.03	4.50	4.14	4.50	7.10	7.50	
			173	6815	3.05	3.50	3.94	4.00	6.53	7.00	





		802.11be-EHT40 MCS0	123	6565	6.09	6.50	7.12	7.50	9.65	10.00	100.00
			147	6685	6.01	6.50	6.71	7.00	9.38	9.50	
			179	6845	5.45	5.50	6.97	7.00	9.29	9.50	
		802.11be-EHT80 MCS0	135	6625	9.08	9.50	9.59	10.00	12.35	12.50	100.00
			151	6705	9.28	9.50	9.47	9.50	12.39	12.50	
			167	6785	8.65	9.00	9.88	10.00	12.32	12.50	
		802.11be-EHT160 MCS0	143	6665	10.72	11.00	10.88	11.00	13.81	14.00	100.00
		802.11be-EHT320 MCS0	159	6745	10.21	10.50	10.83	11.00	13.54	14.00	100.00
	UNII 8 (6.885-7.125GHz)	802.11a 6Mbps	189	6895	0.63	1.00	0.58	1.00	3.62	4.00	98.97
			209	6995	0.75	1.00	0.92	1.00	3.85	4.00	
			229	7095	1.48	1.50	1.85	2.00	4.68	5.00	
			233	7115	0.80	1.00	1.21	1.50	4.02	4.50	
		802.11ax-HE20 MCS0	189	6895	3.49	3.50	3.90	4.00	6.71	7.00	100.00
			209	6995	3.46	3.50	3.85	4.00	6.67	7.00	
			229	7095	3.98	4.00	4.59	5.00	7.31	7.50	
			233	7115	-5.40	-5.00	-5.21	-5.00	-2.29	-2.00	
		802.11ax-HE40 MCS0	195	6925	5.79	6.00	7.09	7.50	9.50	9.50	100.00
			211	7005	5.98	6.00	7.25	7.50	9.67	10.00	
			227	7085	6.88	7.00	7.49	7.50	10.21	10.50	
		802.11ax-HE80 MCS0	199	6945	9.10	9.50	9.69	10.00	12.42	12.50	100.00
			215	7025	9.29	9.50	9.85	10.00	12.59	13.00	
		802.11ax-HE160 MCS0	207	6985	10.23	10.50	11.54	12.00	13.94	14.00	100.00
		802.11be-EHT20 MCS0	189	6895	3.51	4.00	3.92	4.00	6.73	7.00	100.00
			209	6995	3.49	3.50	3.93	4.00	6.73	7.00	
			229	7095	4.07	4.50	4.64	5.00	7.37	7.50	
			233	7115	-5.38	-5.00	-5.19	-5.00	-2.27	-2.00	
		802.11be-EHT40 MCS0	195	6925	5.88	6.00	7.11	7.50	9.55	10.00	100.00
			211	7005	6.03	6.50	7.29	7.50	9.72	10.00	
			227	7085	6.92	7.00	7.58	8.00	10.27	10.50	
		802.11be-EHT80 MCS0	199	6945	9.17	9.50	9.78	10.00	12.50	12.50	100.00
			215	7025	9.33	9.50	9.87	10.00	12.62	13.00	
		802.11be-EHT160 MCS0	207	6985	10.28	10.50	11.59	12.00	13.99	14.00	100.00
		802.11be-EHT320 MCS0	191	6905	10.82	11.00	11.35	11.50	14.10	14.50	100.00

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 100% for Ant6 and Ant7, as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

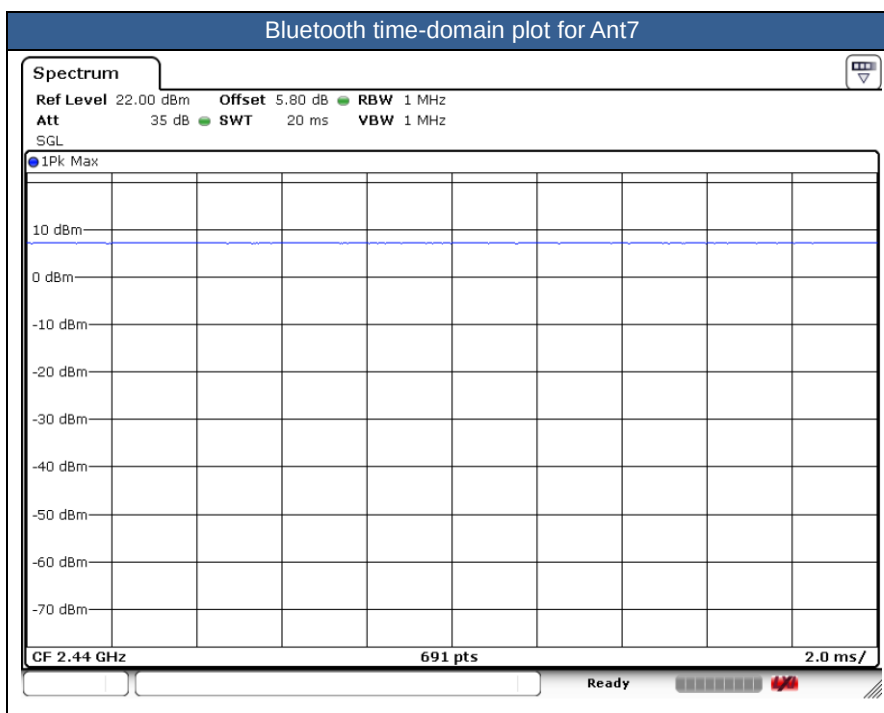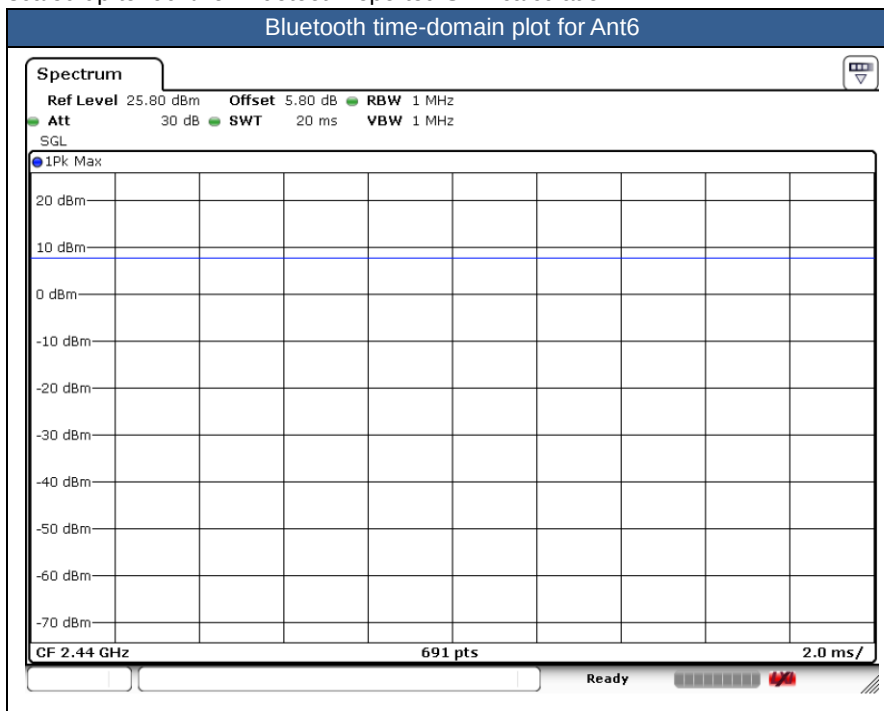

**<Bluetooth_Ant 6_Full Power>**

Bluetooth_Ant 6_Full Power			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.39	6.50	77.03
	39	2441	6.80	7.00	77.03
	78	2480	6.96	7.00	77.03
BR / EDR 2Mbps	0	2402	5.84	6.00	76.67
	39	2441	6.44	6.50	76.67
	78	2480	6.68	7.00	76.67
BR / EDR 3Mbps	0	2402	5.84	6.00	76.75
	39	2441	6.44	6.50	76.75
	78	2480	6.68	7.00	76.75
LE 125kbps	0	2402	6.32	6.50	82.62
	19	2440	6.71	7.00	82.62
	39	2480	6.81	7.00	82.62
LE 500kbps	0	2402	6.53	7.00	56.76
	19	2440	6.99	7.00	56.76
	39	2480	7.02	7.50	56.76
LE 1Mbps	0	2402	6.58	7.00	63.05
	19	2440	6.97	7.00	63.05
	39	2480	7.07	7.50	63.05
LE 2Mbps	0	2402	6.79	7.00	33.49
	19	2440	7.13	7.50	33.49
	39	2480	7.29	7.50	33.49
BT6.0 GFSK 1Mbps	2	2404	5.88	6.00	100.00
	38	2440	6.71	7.00	100.00
	76	2478	7.32	7.50	100.00
BT6.0 GFSK 2Mbps	2	2404	5.95	6.00	100.00
	38	2440	6.79	7.00	100.00
	76	2478	7.39	7.50	100.00
BT6.0 ASK 1Mbps	2	2404	5.91	6.00	100.00
	38	2440	6.75	7.00	100.00
	76	2478	7.36	7.50	100.00

<Bluetooth_Ant 7_Full Power>

Bluetooth_Ant 7_Full Power			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.67	7.00	77.06
	39	2441	6.71	7.00	77.06
	78	2480	6.75	7.00	77.06
BR / EDR 2Mbps	0	2402	6.31	6.50	76.75
	39	2441	6.43	6.50	76.75
	78	2480	6.56	7.00	76.75
BR / EDR 3Mbps	0	2402	6.30	6.50	77.10
	39	2441	6.40	6.50	77.10
	78	2480	6.55	7.00	77.10
LE 125kbps	0	2402	6.45	6.50	82.59
	19	2440	6.51	7.00	82.59
	39	2480	6.53	7.00	82.59
LE 500kbps	0	2402	6.57	7.00	57.14
	19	2440	6.69	7.00	57.14
	39	2480	6.62	7.00	57.14
LE 1Mbps	0	2402	6.59	7.00	65.05
	19	2440	6.63	7.00	65.05



	39	2480	6.65	7.00	65.05
LE 2Mbps	0	2402	6.92	7.00	33.49
	19	2440	6.94	7.00	33.49
	39	2480	7.00	7.00	33.49
BT6.0 GFSK 1Mbps	2	2404	5.44	5.50	100.00
	38	2440	6.28	6.50	100.00
	76	2478	6.57	7.00	100.00
BT6.0 GFSK 2Mbps	2	2404	5.52	6.00	100.00
	38	2440	6.35	6.50	100.00
	76	2478	6.64	7.00	100.00
BT6.0 ASK 1Mbps	2	2404	5.49	5.50	100.00
	38	2440	6.33	6.50	100.00
	76	2478	6.62	7.00	100.00

<Bluetooth_Ant 6_DSI 0>

Bluetooth_Ant 6_DSI 0			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.39	6.50	77.03
	39	2441	6.80	7.00	77.03
	78	2480	6.96	7.00	77.03
BR / EDR 2Mbps	0	2402	5.84	6.00	76.67
	39	2441	6.44	6.50	76.67
	78	2480	6.68	7.00	76.67
BR / EDR 3Mbps	0	2402	5.84	6.00	76.75
	39	2441	6.44	6.50	76.75
	78	2480	6.68	7.00	76.75
LE 125kbps	0	2402	6.32	6.50	82.62
	19	2440	6.71	7.00	82.62
	39	2480	6.81	7.00	82.62
LE 500kbps	0	2402	6.53	7.00	56.76
	19	2440	6.99	7.00	56.76
	39	2480	7.02	7.50	56.76
LE 1Mbps	0	2402	6.58	7.00	63.05
	19	2440	6.97	7.00	63.05
	39	2480	7.07	7.50	63.05
LE 2Mbps	0	2402	6.79	7.00	33.49
	19	2440	7.13	7.50	33.49
	39	2480	7.29	7.50	33.49
BT6.0 GFSK 1Mbps	2	2404	5.88	6.00	100.00
	38	2440	6.71	7.00	100.00
	76	2478	7.32	7.50	100.00
BT6.0 GFSK 2Mbps	2	2404	5.95	6.00	100.00
	38	2440	6.79	7.00	100.00
	76	2478	7.39	7.50	100.00
BT6.0 ASK 1Mbps	2	2404	5.91	6.00	100.00
	38	2440	6.75	7.00	100.00
	76	2478	7.36	7.50	100.00

**<Bluetooth_Ant 7_DSI 0>**

Bluetooth_Ant 7_DSI 0			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.67	7.00	77.06
	39	2441	6.71	7.00	77.06
	78	2480	6.75	7.00	77.06
BR / EDR 2Mbps	0	2402	6.31	6.50	76.75
	39	2441	6.43	6.50	76.75
	78	2480	6.56	7.00	76.75
BR / EDR 3Mbps	0	2402	6.30	6.50	77.10
	39	2441	6.40	6.50	77.10
	78	2480	6.55	7.00	77.10
LE 125kbps	0	2402	6.45	6.50	82.59
	19	2440	6.51	7.00	82.59
	39	2480	6.53	7.00	82.59
LE 500kbps	0	2402	6.57	7.00	57.14
	19	2440	6.69	7.00	57.14
	39	2480	6.62	7.00	57.14
LE 1Mbps	0	2402	6.59	7.00	65.05
	19	2440	6.63	7.00	65.05
	39	2480	6.65	7.00	65.05
LE 2Mbps	0	2402	6.92	7.00	33.49
	19	2440	6.94	7.00	33.49
	39	2480	7.00	7.00	33.49
BT6.0 GFSK 1Mbps	2	2404	5.44	5.50	100.00
	38	2440	6.28	6.50	100.00
	76	2478	6.57	7.00	100.00
BT6.0 GFSK 2Mbps	2	2404	5.52	6.00	100.00
	38	2440	6.35	6.50	100.00
	76	2478	6.64	7.00	100.00
BT6.0 ASK 1Mbps	2	2404	5.49	5.50	100.00
	38	2440	6.33	6.50	100.00
	76	2478	6.62	7.00	100.00

<Bluetooth_Ant 6_DSI 3>

Bluetooth_Ant 6_DSI 3			Ant 6		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.39	6.50	77.03
	39	2441	6.80	7.00	77.03
	78	2480	6.96	7.00	77.03
BR / EDR 2Mbps	0	2402	5.84	6.00	76.67
	39	2441	6.44	6.50	76.67
	78	2480	6.68	7.00	76.67
BR / EDR 3Mbps	0	2402	5.84	6.00	76.75
	39	2441	6.44	6.50	76.75
	78	2480	6.68	7.00	76.75
LE 125kbps	0	2402	6.32	6.50	82.62
	19	2440	6.71	7.00	82.62
	39	2480	6.81	7.00	82.62
LE 500kbps	0	2402	6.53	7.00	56.76
	19	2440	6.99	7.00	56.76
	39	2480	7.02	7.50	56.76
LE 1Mbps	0	2402	6.58	7.00	63.05



	19	2440	6.97	7.00	63.05
	39	2480	7.07	7.50	63.05
LE 2Mbps	0	2402	6.79	7.00	33.49
	19	2440	7.13	7.50	33.49
	39	2480	7.29	7.50	33.49
BT6.0 GFSK 1Mbps	2	2404	5.88	6.00	100.00
	38	2440	6.71	7.00	100.00
	76	2478	7.32	7.50	100.00
BT6.0 GFSK 2Mbps	2	2404	5.95	6.00	100.00
	38	2440	6.79	7.00	100.00
	76	2478	7.39	7.50	100.00
BT6.0 ASK 1Mbps	2	2404	5.91	6.00	100.00
	38	2440	6.75	7.00	100.00
	76	2478	7.36	7.50	100.00

<Bluetooth_Ant 7_DSI 3>

Bluetooth_Ant 7_DSI 3			Ant 7		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	6.67	7.00	77.06
	39	2441	6.71	7.00	77.06
	78	2480	6.75	7.00	77.06
BR / EDR 2Mbps	0	2402	6.31	6.50	76.75
	39	2441	6.43	6.50	76.75
	78	2480	6.56	7.00	76.75
BR / EDR 3Mbps	0	2402	6.30	6.50	77.10
	39	2441	6.40	6.50	77.10
	78	2480	6.55	7.00	77.10
LE 125kbps	0	2402	6.45	6.50	82.59
	19	2440	6.51	7.00	82.59
	39	2480	6.53	7.00	82.59
LE 500kbps	0	2402	6.57	7.00	57.14
	19	2440	6.69	7.00	57.14
	39	2480	6.62	7.00	57.14
LE 1Mbps	0	2402	6.59	7.00	65.05
	19	2440	6.63	7.00	65.05
	39	2480	6.65	7.00	65.05
LE 2Mbps	0	2402	6.92	7.00	33.49
	19	2440	6.94	7.00	33.49
	39	2480	7.00	7.00	33.49
BT6.0 GFSK 1Mbps	2	2404	5.44	5.50	100.00
	38	2440	6.28	6.50	100.00
	76	2478	6.57	7.00	100.00
BT6.0 GFSK 2Mbps	2	2404	5.52	6.00	100.00
	38	2440	6.35	6.50	100.00
	76	2478	6.64	7.00	100.00
BT6.0 ASK 1Mbps	2	2404	5.49	5.50	100.00
	38	2440	6.33	6.50	100.00
	76	2478	6.62	7.00	100.00



<RFID Conducted Power>

Full Power&DS10

Mode	Frequency	Average power (dBm)	Tune up
	(MHz)		
RFID	902.75	25.72	26.0
	914.75	25.68	26.0
	927.25	25.71	26.0
	Duty cycle:%	100	

DS13

Mode	Frequency	Average power (dBm)	Tune up
	(MHz)		
RFID	902.75	19.85	21.0
	914.75	19.93	21.0
	927.25	19.83	21.0
	Duty cycle:%	100	

15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

<SAR test exclusion table>

General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT ANT 6	BT ANT 7	2.4GHz WLAN ANT 6	2.4GHz WLAN ANT 7	5GHz WLAN ANT 6	5GHz WLAN ANT 7	6GHz WLAN ANT 6	6GHz WLAN ANT 7
	Calculated Frequency (MHz)	2480	2480	2462	2462	5825	5825	5955	5955
	Maximum power (dBm)	7.5	7.0	22.0	23.0	20.0	19.5	20.0	20.0
	Maximum rated power(mW)	5.62	5.01	158.49	199.53	100.00	89.13	100.00	100.00
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	1.8	1.6	49.7	62.6	48.3	76.5	97.4	48.8
	Testing required?	No	No	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	125.6	5.0	125.6	5.0	125.6	5.0	125.6	5.0
	exclusion threshold	851.0	1.6	851.0	62.6	818.0	76.5	817.0	48.8
	Testing required?	No	No	No	Yes	No	Yes	No	Yes
Edge 2	Separation distance(mm)	126.5	85.2	126.5	85.2	126.5	85.2	126.5	85.2
	exclusion threshold	860.0	447.0	860.0	447.0	827.0	414.0	826.0	413.0
	Testing required?	No	No	No	No	No	No	No	No
Edge 3	Separation distance(mm)	63.4	209.7	63.4	209.7	63.4	209.7	63.4	209.7
	exclusion threshold	229.0	1692.0	230.0	1693.0	196.0	1659.0	195.0	1659.0
	Testing required?	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	5.0	13.7	5.0	13.7	5.0	13.7	5.0	13.7
	exclusion threshold	1.8	0.6	49.7	22.9	48.3	28.0	97.4	17.9
	Testing required?	No	No	Yes	Yes	Yes	Yes	Yes	Yes

Exposure Position	Wireless Interface	RFID
	Calculated Frequency (MHz)	927.25
	Maximum power (dBm)	26.0
	Maximum rated power(mW)	398.11
Bottom Face	Separation distance(mm)	5.0
	exclusion threshold	76.7
	Testing required?	Yes
Edge 1	Separation distance(mm)	5.0
	exclusion threshold	76.7
	Testing required?	Yes
Edge 2	Separation distance(mm)	126.2
	exclusion threshold	917.0
	Testing required?	No
Edge 3	Separation distance(mm)	142.5
	exclusion threshold	1081.0
	Testing required?	No
Edge 4	Separation distance(mm)	5.0
	exclusion threshold	76.7
	Testing required?	Yes

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN/ Bluetooth signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors.
5. Per October 2020 TCB Workshop Interim procedures, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02.
6. For testing the WLAN 6GHz of this DUT, the selection of test channels was based on FCC guidance, with five channels selected across the entire WLAN 6GHz Bands. For the U-NII-5/U-NII-7 band supporting Standard AP mode and indoor Client mode, the higher output mode was measured among the selected channels.
7. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
8. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
9. WLAN 6GHz is categorized into three classes: Standard Client, Indoor Client and VLP (Very Low Power). Since the power level of Standard Client and Indoor Client is not less than power VLP (Very Low Power), so SAR for Standard Client and Indoor Client is evaluated more conservatively than VLP (Very Low Power) SAR. However, VLP (Very Low Power) SAR still spot-checks the worst-case SAR of Standard Client and Indoor Client.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. 802.11ax/be supports full tone size and partial tone size, after verification for the partial tone size mode power level will not higher than full tone size power level, so chose full tone power to be measured in this report.
7. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO/MIMO antenna mode.
8. For each antenna, transmit power in SISO operation is larger than or equal to the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode. So WLAN SAR testing was performed on SISO antenna, MIMO SAR base on standalone SAR summed together as MIMO SAR.

Power Density General Notes:

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements.
3. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
4. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
6. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
7. Per April 2021 TCB Workshop and KDB 388624 D02v18r08, For the highest SAR test configurations also measure incident PD (total) using power-density reconstruction method in 2 mm closest measurement plane.
8. Per October 2020 TCB Workshop, PTP-PR algorithm was used during psPD measurement and calculations.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WLAN/BT/Rfid bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is P_{max} power, When P_{limit} power higher than P_{max} power, the output power will be limited at P_{max}, and so the SAR will use P_{max} power to do the testing.

Exposure Condition	DSI	Trigger Conditions
Body SAR	DSI 3	Sensor On
Body Sensor Off	DSI 0	Sensor Off



16.1 Body SAR

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN2.4GHz	802.11b 1Mbps	Bottom Face 1	0mm	Ant 6	DSI 3	11	2462	With Scanner	15.97	16	1.007	99.06	1.009	-0.06	0.968	0.984
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face 1	0mm	Ant 6	DSI 3	6	2437	With Scanner	15.91	16	1.021	99.06	1.009	-0.17	0.791	0.815
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 6	DSI 3	11	2462	With Scanner	15.97	16	1.007	99.06	1.009	0	0.162	0.165
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face 1	28mm	Ant 6	DSI 0	1	2412	With Scanner	21.7	22	1.072	99.06	1.009	0.02	0.238	0.257
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	30mm	Ant 6	DSI 0	1	2412	With Scanner	21.7	22	1.072	99.06	1.009	0.05	0.281	0.304
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 7	DSI 3	11	2462	With Scanner	15.95	16	1.012	99.06	1.009	-0.09	0.919	0.938
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 7	DSI 3	6	2437	With Scanner	15.55	16	1.109	99.06	1.009	0.08	0.735	0.822
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 7	DSI 3	11	2462	With Scanner	15.95	16	1.012	99.06	1.009	-0.18	0.732	0.747
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 7	DSI 0	6	2437	With Scanner	22.99	23	1.002	99.06	1.009	0.12	0.062	0.063
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	20mm	Ant 7	DSI 0	6	2437	With Scanner	22.99	23	1.002	99.06	1.009	0.08	0.330	0.334
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	24mm	Ant 7	DSI 0	6	2437	With Scanner	22.99	23	1.002	99.06	1.009	-0.02	0.142	0.144
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	42	5210	With Scanner	9.81	10	1.045	100	1.000	0.01	0.956	0.999
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	DSI 3	42	5210	With Scanner	9.81	10	1.045	100	1.000	-0.13	0.598	0.625
	WLAN5GHz	802.11be-EHT80 MCS0	Bottom Face 1	28mm	Ant 6	DSI 0	42	5210	With Scanner	19.03	19.5	1.114	100	1.000	0.16	0.067	0.075
	WLAN5GHz	802.11be-EHT80 MCS0	Edge 4	30mm	Ant 6	DSI 0	42	5210	With Scanner	19.03	19.5	1.114	100	1.000	-0.05	0.296	0.33
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 7	DSI 3	42	5210	With Scanner	15.41	15.5	1.021	100	1.000	-0.1	0.540	0.551
02	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 7	DSI 3	42	5210	With Scanner	15.41	15.5	1.021	100	1.000	-0.09	0.992	1.013
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 7	DSI 0	42	5210	With Scanner	19.33	19.5	1.040	100	1.000	0.06	0.103	0.107
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	20mm	Ant 7	DSI 0	42	5210	With Scanner	19.33	19.5	1.040	100	1.000	0.08	0.218	0.227
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	24mm	Ant 7	DSI 0	42	5210	With Scanner	19.33	19.5	1.040	100	1.000	0.01	0.192	0.200
03	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	50	5250	With Scanner	8.41	8.5	1.021	100	1.000	0.01	0.960	0.980
	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 4	0mm	Ant 6	DSI 3	50	5250	With Scanner	8.41	8.5	1.021	100	1.000	0.04	0.597	0.610
	WLAN5GHz	802.11be-EHT20 MCS0	Bottom Face 1	28mm	Ant 6	DSI 0	64	5320	With Scanner	19.63	20	1.089	100	1.000	-0.04	0.068	0.074
	WLAN5GHz	802.11be-EHT20 MCS0	Edge 4	30mm	Ant 6	DSI 0	64	5320	With Scanner	19.63	20	1.089	100	1.000	-0.15	0.296	0.322
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face	0mm	Ant 7	DSI 3	50	5250	With Scanner	12.32	12.5	1.042	100	1.000	0.02	0.482	0.502
	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant 7	DSI 3	50	5250	With Scanner	12.32	12.5	1.042	100	1.000	0.01	0.913	0.951
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 7	DSI 0	58	5290	With Scanner	19.02	19.5	1.117	100	1.000	0.06	0.165	0.184
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	20mm	Ant 7	DSI 0	58	5290	With Scanner	19.02	19.5	1.117	100	1.000	0.02	0.194	0.217
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	24mm	Ant 7	DSI 0	58	5290	With Scanner	19.02	19.5	1.117	100	1.000	0.01	0.177	0.198
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	114	5570	With Scanner	9.45	9.5	1.012	100	1.000	0.02	0.897	0.908
	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 4	0mm	Ant 6	DSI 3	114	5570	With Scanner	9.45	9.5	1.012	100	1.000	-0.08	0.585	0.592
	WLAN5GHz	802.11be-EHT80 MCS0	Bottom Face 1	28mm	Ant 6	DSI 0	138	5690	With Scanner	19.53	20	1.114	100	1.000	0.18	0.063	0.070
	WLAN5GHz	802.11be-EHT80 MCS0	Edge 4	30mm	Ant 6	DSI 0	138	5690	With Scanner	19.53	20	1.114	100	1.000	-0.12	0.290	0.323
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face	0mm	Ant 7	DSI 3	114	5570	With Scanner	9.39	9.5	1.026	100	1.000	0.02	0.298	0.306
04	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant 7	DSI 3	114	5570	With Scanner	9.39	9.5	1.026	100	1.000	0.05	0.954	0.979
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 7	DSI 0	106	5530	With Scanner	19.26	19.5	1.057	100	1.000	0.02	0.316	0.334
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	20mm	Ant 7	DSI 0	106	5530	With Scanner	19.26	19.5	1.057	100	1.000	0.02	0.120	0.127
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	24mm	Ant 7	DSI 0	106	5530	With Scanner	19.26	19.5	1.057	100	1.000	0.05	0.185	0.196
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	155	5775	With Scanner	10.49	10.5	1.002	100	1.000	0.01	0.972	0.974
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	DSI 3	155	5775	With Scanner	10.49	10.5	1.002	100	1.000	0.01	0.908	0.910
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face 1	28mm	Ant 6	DSI 0	155	5775	With Scanner	19.08	19.5	1.102	100	1.000	0.06	0.076	0.084
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	30mm	Ant 6	DSI 0	155	5775	With Scanner	19.08	19.5	1.102	100	1.000	0.03	0.450	0.496
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 7	DSI 3	155	5775	With Scanner	11.68	12	1.076	100	1.000	0.05	0.370	0.398
05	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 7	DSI 3	155	5775	With Scanner	11.68	12	1.076	100	1.000	0.01	0.922	0.992
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 7	DSI 0	155	5775	With Scanner	19.13	19.5	1.089	100	1.000	0.03	0.285	0.310
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	20mm	Ant 7	DSI 0	155	5775	With Scanner	19.13	19.5	1.089	100	1.000	0.02	0.149	0.162
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	24mm	Ant 7	DSI 0	155	5775	With Scanner	19.13	19.5	1.089	100	1.000	0.01	0.179	0.195
06	Bluetooth	BT6.0 GFSK 1Mbps	Bottom Face 1	0mm	Ant 6	DSI 3	76	2478	With Scanner	7.32	7.5	1.042	100	1.000	0.01	0.099	0.103
	Bluetooth	BT6.0 GFSK 1Mbps	Edge 4	0mm	Ant 6	DSI 3	76	2478	With Scanner	7.32	7.5	1.042	100	1.000	0.11	0.001	0.001
	Bluetooth	BT6.0 GFSK 1Mbps	Bottom Face	0mm	Ant 7	DSI 3	76	2478	With Scanner	6.57	7	1.104	100	1.000	0.01	0.091	0.1
	Bluetooth	BT6.0 GFSK 1Mbps	Edge 1	0mm	Ant 7	DSI 3	76	2478	With Scanner	6.57	7	1.104	100	1.000	0.1	0.038	0.042



Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m^2)
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	31	6105	With Scanner	13.05	13.5	1.109	100	1	0.03	0.814	0.903	4.210
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	63	6265	With Scanner	13.11	13.5	1.094	100	1	0.02	0.759	0.83	3.910
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	95	6425	With Scanner	13.41	13.5	1.021	100	1	0.01	0.822	0.839	4.150
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	127	6585	With Scanner	12.53	13	1.114	100	1	0.05	0.833	0.928	4.210
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	159	6745	With Scanner	12.48	12.5	1.005	100	1	0.06	0.849	0.853	4.360
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	0mm	Ant 6	DSI 3	191	6905	With Scanner	12.48	12.5	1.005	100	1	0.02	0.822	0.826	4.250
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	31	6105	With Scanner	13.05	13.5	1.109	100	1	0.01	0.888	0.985	4.530
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	63	6265	With Scanner	13.11	13.5	1.094	100	1	0.02	0.881	0.964	4.510
07	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	95	6425	With Scanner	13.41	13.5	1.021	100	1	0.03	0.980	1.001	4.930
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	127	6585	With Scanner	12.53	13	1.114	100	1	0.05	0.835	0.93	4.430
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	159	6745	With Scanner	12.48	12.5	1.005	100	1	0.04	0.821	0.825	4.430
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	191	6905	With Scanner	12.48	12.5	1.005	100	1	-0.01	0.832	0.836	4.510
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face 1	28mm	Ant 6	DSI 0	95	6425	With Scanner	19.84	20	1.038	100	1	0.02	0.084	0.087	0.437
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	30mm	Ant 6	DSI 0	95	6425	With Scanner	19.84	20	1.038	100	1	0.03	0.192	0.199	0.999
	WLAN6GHz VLP	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	191	6905	With Scanner	10.82	11	1.042	100	1	0.02	0.735	0.766	3.510
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face	0mm	Ant 7	DSI 3	31	6105	With Scanner	11.81	12	1.045	100	1	0.06	0.391	0.409	2.250
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	31	6105	With Scanner	11.81	12	1.045	100	1	0.05	0.932	0.974	4.510
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	63	6265	With Scanner	11.41	11.5	1.021	100	1	0.02	0.805	0.822	4.210
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	95	6425	With Scanner	11.63	12	1.089	100	1	0.06	0.756	0.823	4.130
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	127	6585	With Scanner	11.52	12	1.117	100	1	0.04	0.845	0.944	3.310
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	159	6745	With Scanner	11.81	12	1.045	100	1	0.03	0.745	0.779	4.090
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	0mm	Ant 7	DSI 3	191	6905	With Scanner	11.59	12	1.099	100	1	0.02	0.569	0.625	3.250
	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 7	DSI 0	159	6745	With Scanner	19.59	20	1.099	100	1	0.02	0.501	0.551	2.810
	WLAN6GHz	802.11be-EHT320 MCS0	Bottom face	20mm	Ant 7	DSI 0	95	6425	With Scanner	19.58	20	1.102	100	1	0.01	0.284	0.313	1.640
	WLAN6GHz	802.11be-EHT320 MCS0	Edge1	24mm	Ant 7	DSI 0	95	6425	With Scanner	19.58	20	1.102	100	1	0.03	0.261	0.288	1.950
	WLAN6GHz VLP	802.11ax-EHT160 MCS0	Edge1	0mm	Ant 7	DSI 3	207	6985	With Scanner	11.54	12	1.112	100	1	0.01	0.531	0.59	3.090

<RFID SAR>

Plot	Band	Test Position	Gap (mm)	Sample	Antenna	Power State	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
08	UHF RFID	Bottom Face	0mm	With Scanner	Ant 8	DSI 3	914.75	19.93	21.00	1.279	100	1.000	0.03	0.835	1.068
	UHF RFID	Bottom Face	0mm	With Scanner	Ant 8	DSI 3	902.75	19.85	21.00	1.303	100	1.000	0.05	0.765	0.997
	UHF RFID	Bottom Face	0mm	With Scanner	Ant 8	DSI 3	927.25	19.83	21.00	1.309	100	1.000	0.03	0.761	0.996
	UHF RFID	Edge 1	0mm	With Scanner	Ant 8	DSI 3	914.75	19.93	21.00	1.279	100	1.000	0.05	0.222	0.284
	UHF RFID	Edge 2	0mm	With Scanner	Ant 8	DSI 0	927.25	25.71	26.00	1.069	100	1.000	0.06	0.041	0.044
	UHF RFID	Edge 3	0mm	With Scanner	Ant 8	DSI 0	927.25	25.71	26.00	1.069	100	1.000	0.01	0.032	0.034
	UHF RFID	Edge 4	0mm	With Scanner	Ant 8	DSI 3	914.75	19.93	21.00	1.279	100	1.000	0.02	0.236	0.302
	UHF RFID	Bottom Face	41mm	With Scanner	Ant 8	DSI 0	927.25	25.71	26.00	1.069	100	1.000	0.02	0.341	0.365
	UHF RFID	Edge 1	18mm	With Scanner	Ant 8	DSI 0	927.25	25.71	26.00	1.069	100	1.000	0.01	0.523	0.559
	UHF RFID	Edge 4	44mm	With Scanner	Ant 8	DSI 0	927.25	25.71	26.00	1.069	100	1.000	0.03	0.098	0.105

16.2 6GHz PD Test Result

<WLAN PD>

Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (A)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	31	6105	13.05	0.0625	1.9	0.88	1.700	2.140
WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	10mm	Ant 6	DSI 3	31	6105	13.05	0.15	1.55		1.340	1.420
WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	191	6905	12.48	0.0625	1.99	0.66	2.210	2.230
WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	8.59mm	Ant 6	DSI 3	191	6905	12.48	0.15	1.71		1.750	1.910

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (A)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	31	6105	13.05	13.50	1.109	100	1.000	0.0625	1.5535	0.08	1.7	2.93	2.14	3.69
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	63	6265	13.11	13.50	1.094	100	1.000	0.0625	1.5535	-0.08	2.1	3.57	2.65	4.50
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	95	6425	13.41	13.50	1.021	100	1.000	0.0625	1.5535	-0.03	2.7	4.28	3.38	5.36
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	127	6585	12.53	13.00	1.114	100	1.000	0.0625	1.5535	0.07	3.01	5.21	3.58	6.20
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	159	6745	12.48	12.50	1.005	100	1.000	0.0625	1.5535	0.06	2.52	3.93	3.54	5.52
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 4	2mm	Ant 6	DSI 3	191	6905	12.48	12.50	1.005	100	1.000	0.0625	1.5535	-0.03	2.21	3.45	2.23	3.48
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	31	6105	11.81	12.00	1.045	100	1.000	0.0625	1.5535	0.03	2.02	3.28	2.77	4.50
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	63	6265	11.41	11.50	1.021	100	1.000	0.0625	1.5535	0.01	2.22	3.52	3.63	5.76
01	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	95	6425	11.63	12.00	1.089	100	1.000	0.0625	1.5535	0.08	2.18	3.69	3.86	6.53
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	127	6585	11.52	12.00	1.117	100	1.000	0.0625	1.5535	0.03	2.23	3.87	3.42	5.93
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	159	6745	11.81	12.00	1.045	100	1.000	0.0625	1.5535	-0.07	2.63	4.27	2.99	4.85
	WLAN6GHz	802.11be-EHT320 MCS0	Edge 1	2mm	Ant 7	DSI 3	191	6905	11.59	12.00	1.099	100	1.000	0.0625	1.5535	0.12	2.7	4.61	3.16	5.40



16.3 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Ratio
1st	WLAN2.4GHz	802.11b 1Mbps	Bottom Face 1	0mm	Ant 6	DSI 3	11	2462	17.47	17.50	1.007	99.06	1.009	-0.06	0.968	0.984	-
2nd	WLAN2.4GHz	802.11b 1Mbps	Bottom Face 1	0mm	Ant 6	DSI 3	11	2462	17.47	17.50	1.007	99.06	1.009	0.03	0.905	0.920	1.07
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 7	DSI 3	42	5210	15.41	15.50	1.021			-0.09	0.992	1.013	-
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 7	DSI 3	42	5210	15.41	15.50	1.021			0.05	0.953	0.973	1.04
1st	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant 7	DSI 3	114	5570	9.39	9.50	1.026			0.05	0.954	0.979	-
2nd	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant 7	DSI 3	114	5570	9.39	9.50	1.026			0.06	0.925	0.949	1.03
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	155	5775	10.49	10.50	1.002			0.01	0.972	0.974	-
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face 1	0mm	Ant 6	DSI 3	155	5775	10.49	10.50	1.002			0.02	0.935	0.937	1.04
1st	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	95	6425	13.41	13.5	1.021			0.03	0.980	1.001	-
2nd	WLAN6GHz	802.11be-EHT320 MCS0	Edge4	0mm	Ant 6	DSI 3	95	6425	13.41	13.5	1.021			0.02	0.935	0.955	1.05
1st	UHF RFID		Bottom Face	0mm	Ant 8	DSI 3		914.75	19.93	21.00	1.279			0.03	0.835	1.068	-
2nd	UHF RFID		Bottom Face	0mm	Ant 8	DSI 3		914.75	19.93	21.00	1.279			0.01	0.802	1.026	1.04

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations			Touch Computer
				Body
1.	RFID	+	WLAN2.4GHz + Bluetooth	Yes
2.			WLAN5GHz + Bluetooth	Yes
3.			WLAN6GHz + Bluetooth	Yes
4.			WLAN5.2GHz/5.3GHz + WLAN6GHz	Yes
5.			WLAN2.4GHz + WLAN5GHz	Yes
6.			WLAN2.4GHz + WLAN6GHz	Yes
7.			WLAN5.2GHz/5.3GHz + WLAN5.5GHz/5.8GHz	Yes
8.			WLAN2.4GHz + WLAN5GHz + Bluetooth	Yes
9.			WLAN2.4GHz + WLAN6GHz + Bluetooth	Yes
10.			WLAN5.2GHz/5.3GHz + WLAN6GHz + Bluetooth	Yes
11.			WLAN5.2GHz/5.3GHz + WLAN5.5GHz/5.8GHz + Bluetooth	Yes
12.			WLAN2.4GHz + Bluetooth + NFC	Yes
13.			WLAN5GHz + Bluetooth+ NFC	Yes
14.			WLAN6GHz + Bluetooth+ NFC	Yes
15.			WLAN5.2GHz/5.3GHz + WLAN6GHz+ NFC	Yes
16.			WLAN2.4GHz + WLAN5GHz+ NFC	Yes
17.			WLAN2.4GHz + WLAN6GHz+ NFC	Yes
18.			WLAN5.2GHz/5.3GHz + WLAN5.5GHz/5.8GHz+ NFC	Yes
19.			WLAN2.4GHz + WLAN5GHz + Bluetooth+ NFC	Yes
20.			WLAN2.4GHz + WLAN6GHz + Bluetooth+ NFC	Yes
21.			WLAN5.2GHz/5.3GHz + WLAN6GHz + Bluetooth+ NFC	Yes
22.			WLAN5.2GHz/5.3GHz + WLAN5.5GHz/5.8GHz + Bluetooth + NFC	Yes
23.			NFC	Yes

General Note:

- According to the EUT characteristic, when WLAN 2.4GHz and Bluetooth share the same antenna path and cannot transmit simultaneously; when WLAN2.4GHz Ant 7 and Bluetooth Ant 6 are located on different antennas, they can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 6GHz can transmit simultaneously.
- WLAN standalone SAR summed together as WLAN MIMO SAR.
- The Bluetooth can transmit in SISO mode only and they have no MIMO mode.
- According to the EUT characteristic, WLAN 5GHz/WLAN 6GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/WLAN 6GHz and WLAN 2.4GHz can transmit simultaneously.
- NFC can transmit simultaneously with other Radios in body exposure condition.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- The reported SAR summation is calculated based on the same configuration and test position.
- When the NFC standalone SAR is much less than 0.001, it is not necessary to do the co-located SAR summation.
- The equipment under test (EUT) contains the Qualcomm modems supporting WLAN/BT/RFID technologies. These modems are always enabled with Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure the time-averaged RF exposure follows the FCC requirement. Smart Transmit algorithm controls the total RF exposure from all WLAN/BT/RFID to not exceed FCC limit. In addition, each antenna needs to satisfy simultaneous transmission analysis with External radios (NFC) in this report.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

- iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
- v) The SPLSR calculated results please refer to section 17.3.

17.1 Qualcomm Smart Transmit Simultaneous Transmission Guidance

Based on Qualcomm Smart Transmit simultaneous transmission analysis guidance, If all radios are selected to be under Smart Transmit control in EFS version 19 (or higher), then RF exposure from radios are managed by Smart Transmit in the same way. No additional TER analysis is needed.

Smart Transmit current implementation assumes hotspots from all active radios are collocated. Therefore, for a total of 100% exposure margin, if primary radio uses x%, then the exposure margin left for secondary radio(s) is capped to (100-x)%. Thus, the compliance equation for simultaneous active radios, such as follow,

$$x\% * A + (100-x)\% * B \leq 1.0$$

where, A is normalized time-averaged SAR exposure corresponding to “maximum of {minimum [EFS Plimit + device uncertainty; NV setting Pmax + device uncertainty]; EFS Plimit}” from primary radio, and $A \leq 1.0$; B for secondary radio(s) is

(for legacy radio or sub6 NR): normalized time-averaged SAR exposure corresponding to “maximum of {minimum [EFS Plimit + device uncertainty; NV setting Pmax + device uncertainty]; EFS Plimit } ”

and $B \leq 1.0$. As can be seen, A and B by definition is the exposure corresponding to “maximum of {minimum [EFS Plimit + device uncertainty; NV setting Pmax + device uncertainty]; EFS Plimit}”, and it is NOT defined as reported exposure

The total RF exposure in this simultaneous transmission scenario is controlled and managed within Smart Transmit operation, and the compliance is demonstrated in Part 2 test.


17.2 Body Exposure Conditions

Exposure Position	1	2	3	4	5	6	7	8	9	10	1+2+10 Summed 1g SAR (W/kg)	3+4+10 Summed 1g SAR (W/kg)	5+6+10 Summed 1g SAR (W/kg)	7+10 Summed 1g SAR (W/kg)	8+10 Summed 1g SAR (W/kg)	9+10 Summed 1g SAR (W/kg)	No
	2.4GHz WLAN Ant 6 1g SAR (W/kg)	2.4GHz WLAN Ant 7 1g SAR (W/kg)	5GHz WLAN Ant 6 1g SAR (W/kg)	5GHz WLAN Ant 7 1g SAR (W/kg)	6GHz WLAN Ant 6 1g SAR (W/kg)	6GHz WLAN Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	RFID 1g SAR (W/kg)	NFC 1g SAR (W/kg)							
Bottom face at 0mm	0.984	0.938	0.999	0.551	0.928	0.409	0.103	0.1	1.068		1.92	1.55	1.34	0.10	0.10	1.07	Case 1
Edge1 at 0mm	0.001	0.747	0.099	1.013		0.974		0.042	0.284		0.75	1.11	0.97	0.00	0.04	0.28	
Edge2 at 0mm	0.001	0.188	0.001	0.082					0.044		0.19	0.08	0.00	0.00	0.00	0.04	
Edge3 at 0mm	0.326	0.001	0.135	0.034					0.034		0.33	0.17	0.00	0.00	0.00	0.03	
Edge4 at 0mm	0.165	0.063	0.91	0.334	1.001	0.551	0.001		0.302		0.23	1.24	1.55	0.00	0.00	0.30	
Bottom face at 28mm	0.257		0.084		0.087				0.365		0.26	0.08	0.09	0.00	0.00	0.37	
Bottom face at 20mm		0.334		0.227		0.313			0.365		0.33	0.23	0.31	0.00	0.00	0.37	
Edge1 at 24mm		0.144		0.2		0.288			0.559		0.14	0.20	0.29	0.00	0.00	0.56	
Edge4 at 30mm	0.304		0.496		0.199				0.105		0.30	0.50	0.20	0.00	0.00	0.11	

17.3 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.

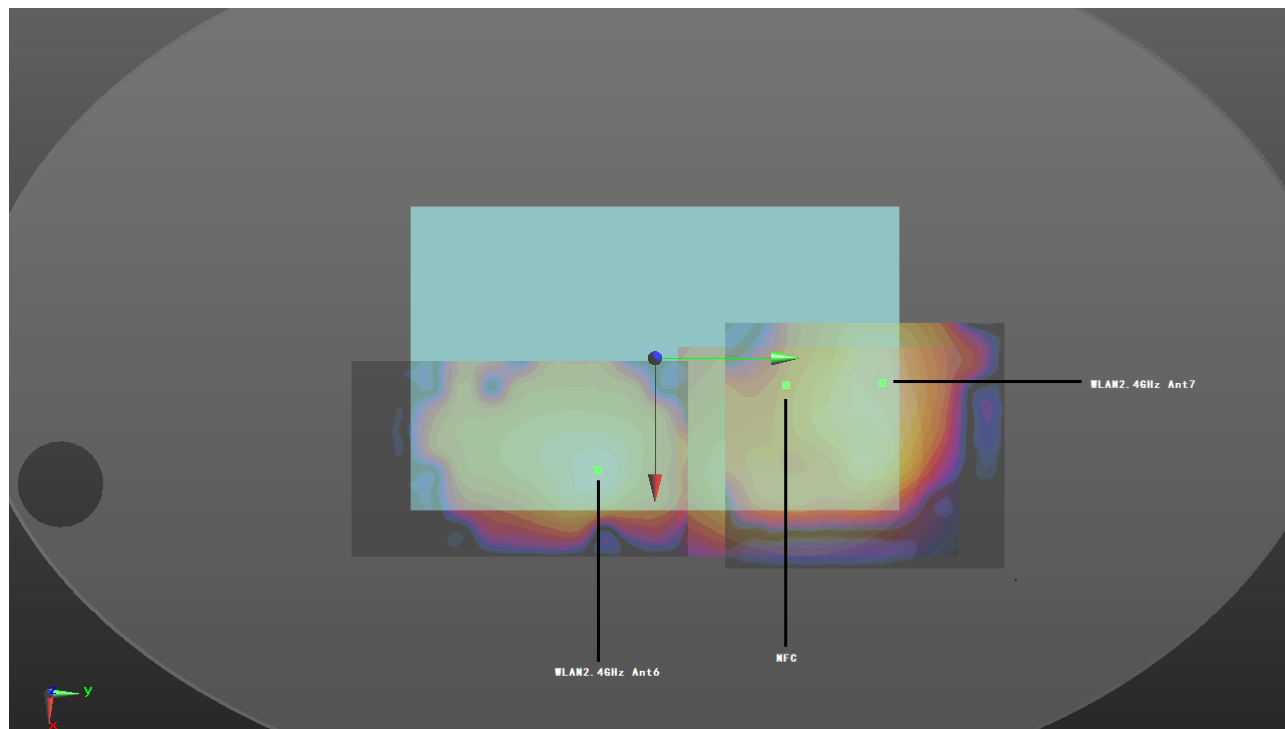

WLAN2.4G+NFC Bottom Face 0mm

	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
Case 1	WLAN2.4GHz Ant 6	Bottom Face	0.984	0	58.3	-29.1	2.71	123.9	1.92	0.02	Not required
	WLAN2.4GHz Ant 7		0.938	0	29.3	91.2	-3.01				
	WLAN2.4GHz Ant 7	Bottom Face	0.938	0	29.3	91.2	-3.01	30.1	0.94	0.03	Not required
	NFC		0	0	58.1	100	-2.31				
	WLAN2.4GHz Ant 6	Bottom Face	0.984	0	58.3	-29.1	2.71	129.2	0.98	0.01	Not required
	NFC		0	0	58.1	100	-2.31				

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 4 MHz - 10 GHz range)							
Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System errors							
Probe calibration	18.6	N	2	1	1	9.3	9.3
Probe calibration drift	1.7	R	1.732	1	1	1.0	1.0
Probe linearity and detection Limit	4.7	R	1.732	1	1	2.7	2.7
Broadband signal	2.8	R	1.732	1	1	1.6	1.6
Probe isotropy	7.6	R	1.732	1	1	4.4	4.4
Other probe and data acquisition errors	2.4	N	1	1	1	2.4	2.4
RF ambient and noise	1.8	N	1	1	1	1.8	1.8
Probe positioning errors	0.006	N	1	0.5	0.5	0.0	0.0
Data processing errors	4.0	N	1	1	1	4.0	4.0
Phantom and Device Errors							
Measurement of phantom conductivity (σ)	2.5	N	1	0.78	0.71	2.0	1.8
Temperature effects (medium)	5.4	R	1.732	0.78	0.71	2.4	2.2
Shell permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0
Distance between the radiating element of the DUT and the phantom medium	2.0	N	1	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	1.0	N	1	1	1	1.0	1.0
Device holder effects	3.6	N	1	1	1	3.6	3.6
Effect of operating mode on probe sensitivity	2.4	R	1.732	1	1	1.4	1.4
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	2.5	N	1	1	1	2.5	2.5
Validation antenna uncertainty (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Correction to the SAR results							
Phantom deviation from target (ϵ', σ)	1.9	N	1	1	0.84	1.9	1.6
SAR scaling	0.0	R	1.732	1	1	0.0	0.0
Combined Std. Uncertainty						14.5%	14.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.8%

SAR Uncertainty Budget for frequency range 4MHz to 10GHz

cDASY6 Module mmWave Uncertainty Budget Evaluation Distances to the Antennas > $\lambda/2\pi$ In Compliance with IEC TR 63170					
Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Uncertainty terms dependent on the measurement system					
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68
PD Uncertainty Budget					

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] IEC/IEEE 62209-1528:2020, "Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)", Oct. 2020
- [11] IEC 62479:2010 Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)
- [12] IEC TR 63170: 2018 Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz
- [13] SPEAG DASY6 System Handbook
- [14] SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz)

Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

-----THE END-----