





Shiwinka Part Number DOC315-022-US, Revision 3
©2022 Shiwinka Technology Co., Ltd.




SCO-M-EAS-315


Installation Instruction

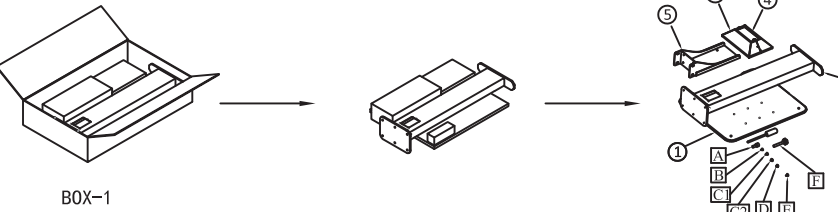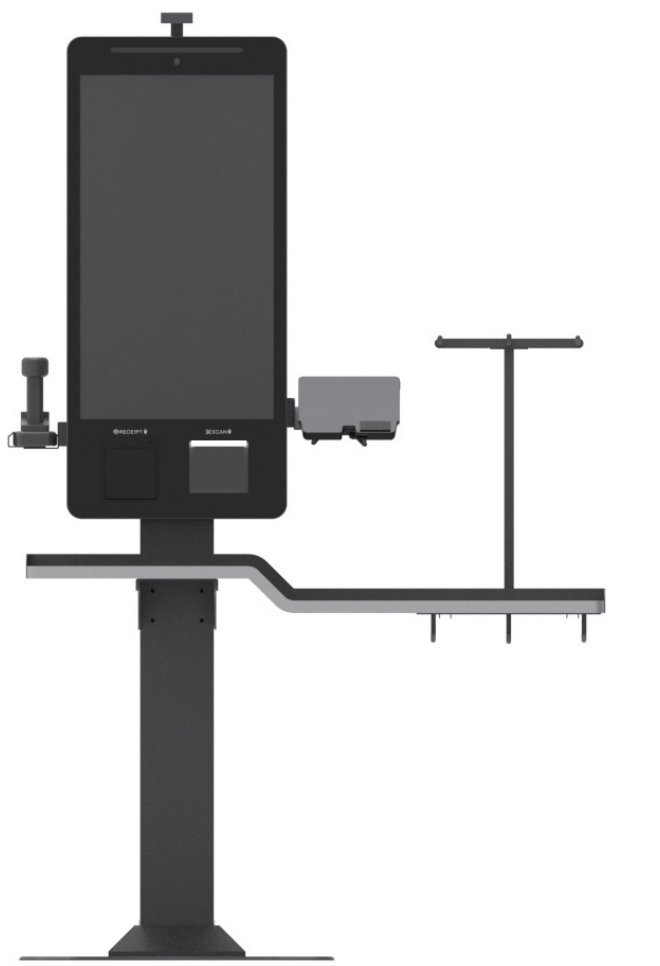

1. Box 1 includes ① a base, ② a pole, ③ & ④ base covers, ⑤ a scan station counter support. It also includes various ⑥ A, ⑦ B, ⑧ C, ⑨ D, ⑩ E, and ⑪ types of screws, bolts, and tools.

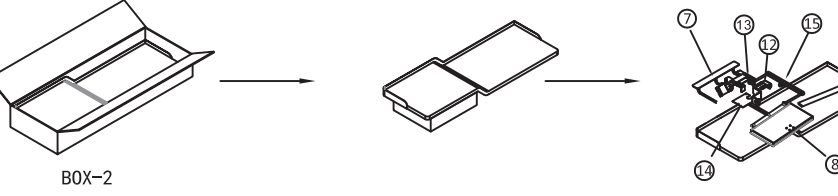

2. Box 2 includes ⑥ a scan station counter, ⑦ ⑧ ⑨ and ⑬ shopping bag holders, ⑫ a handheld scanner holder, ⑭ a pinpad holder, and ⑮ a lower back cover.

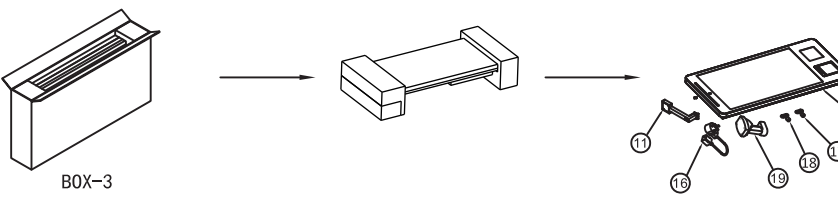


3.Box 3 includes (10) a screen, (11) a camera, (16) a power cord, (17) two keys to the host, (18) two keys to the printer, (19) a wireless handheld


* Note: pinpad and network cable are not included in the package.

Bolt **A** : M8X16 hex bolt
Screw **B** : M3X6 flat-head screw
Screw **C** : M4X6 flat-head screw
Screw **D** : M4X6 flat-head screw with gasket
Screw **E** : M4X10 flat-head screw
Bolt **F** : M8X70 expansion bolt & nut

SCO-M-EAS-315

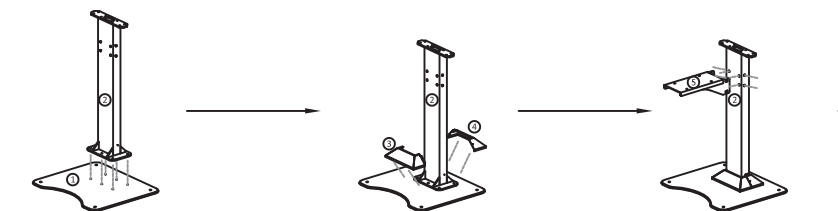


2. Join ③ and ④ with two B screws, and then place them onto ② with another two 10 screws using screwdriver 11.

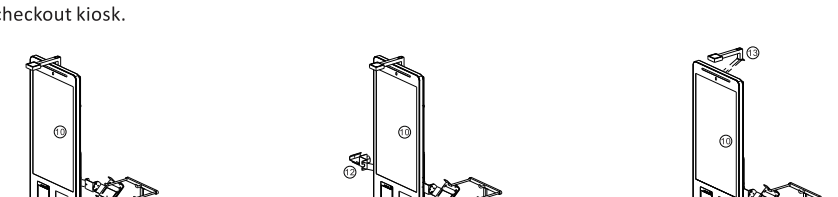

Attach ⑪ to the right side of ⑩ with three ⑫ screws using screwdriver ⑬.

10. Attach ⑬ to the left side of ⑩ with three ⑭ screws.

11. Pass the USB cable of ⑮ at the top of ⑩. Place ⑯ three ⑰ screws using screwdriver ⑱.

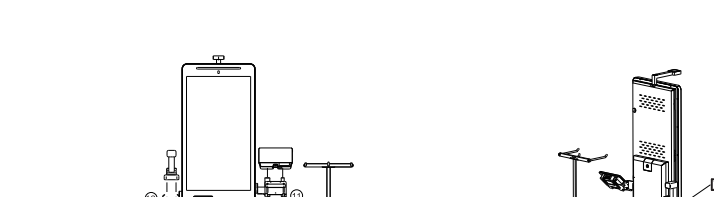


through the hole on top of 11 with driver 11. 12. Adjust the screws on 12 for the wireless scanner 13. 13. Use one 13 screw if needed. Adjust the screws on 13 for pinpad scanner holder if needed.


ow to attach the wireless
onto the left side of ⑫.




Part D: How to connect cables.

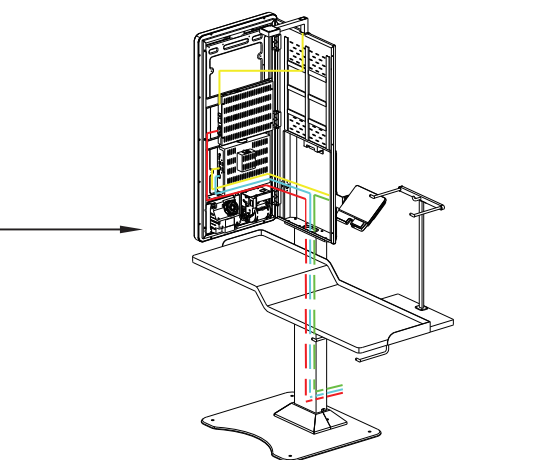

14. Unlock the back cover using the included key **(17)**.
Connect the cables according to the diagram.
The red line indicates the power cord **(16)** of the screen.
The green line indicates the power cable of pinpad
(not included in the package.)
Yellow line 1 indicates the USB cable for pinpad
(not included in the package.)
Yellow line 2 indicates the USB cable for the camera **(11)**.
The cyan line indicates network cable (not included in the package).
Except for yellow line 2, pass the other cables through the oval hole
at bottom of the back cover to the end of the pole.

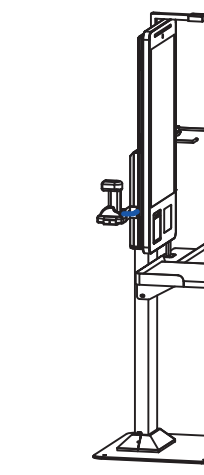


15. Find the wireless scanner cable in the screen and pass it through the hole on the left side of the screen. Then, connect it to the wireless scanner holder (19). (The blue line indicates the scanner cable.) After connecting the cables, lock the back cover using the included key (17).

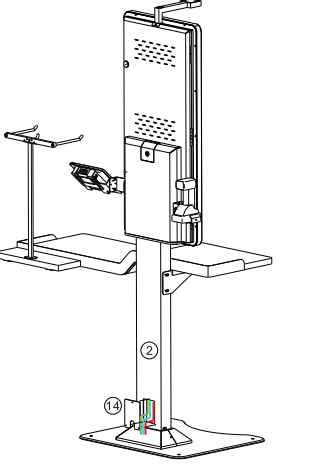



16. Take the power cables, USB cable, and network cable out of the bottom hole on the back of the pole (2). Attach (14) to the bottom hole of (2) with three (3) screws.



SCO-M-EAS-315

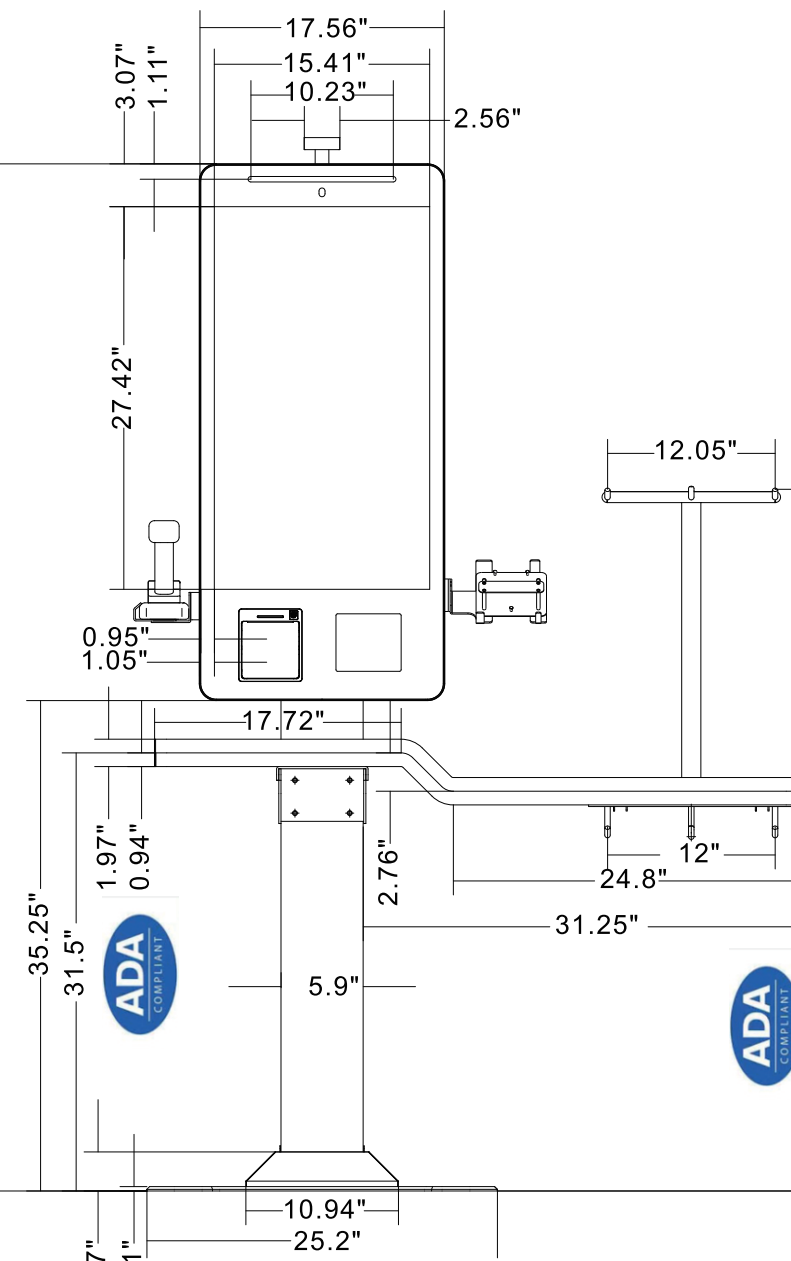

t: inch

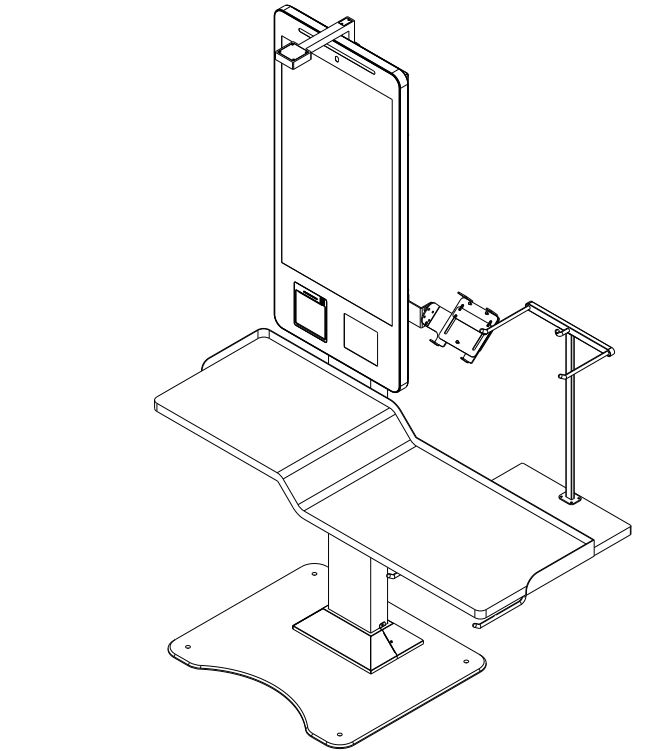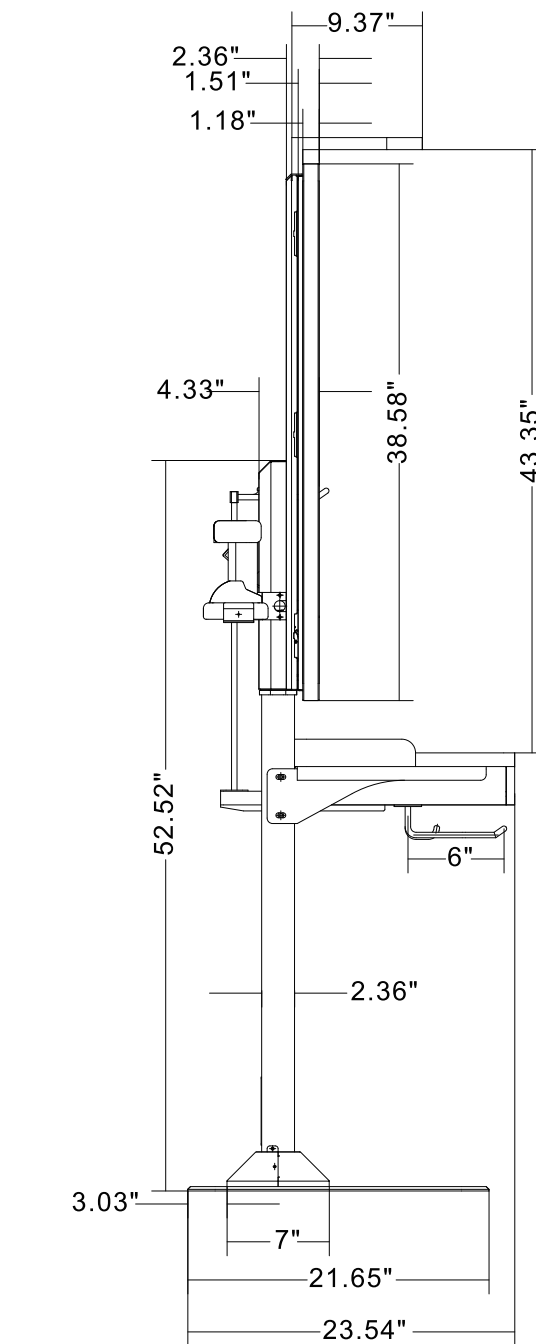

SCO-M-EAS-315

Page 3

FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.