





Conducted Spurious Emission

FR1 n77 / 10MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

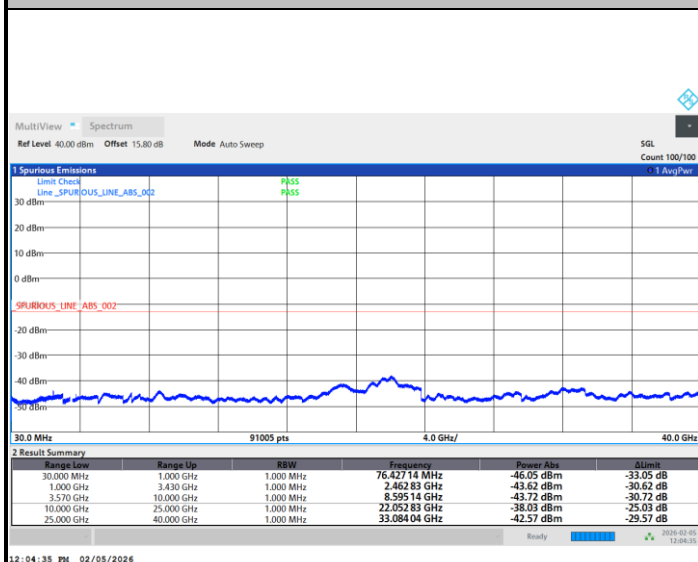

Middle Channel

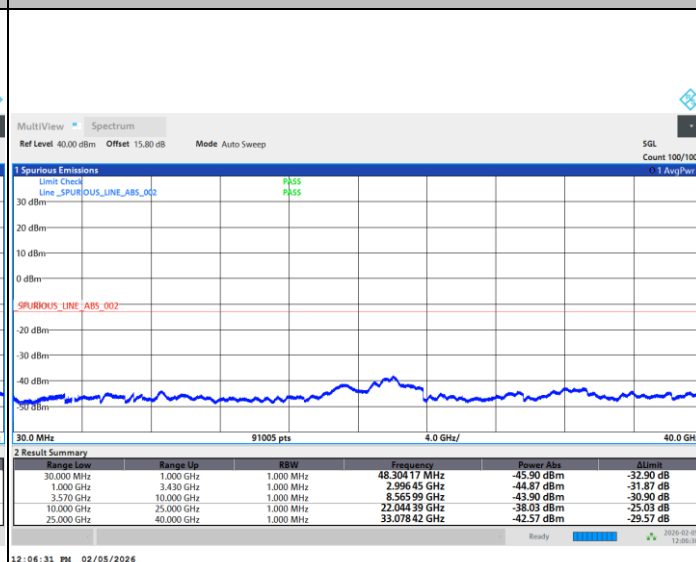

Highest Channel

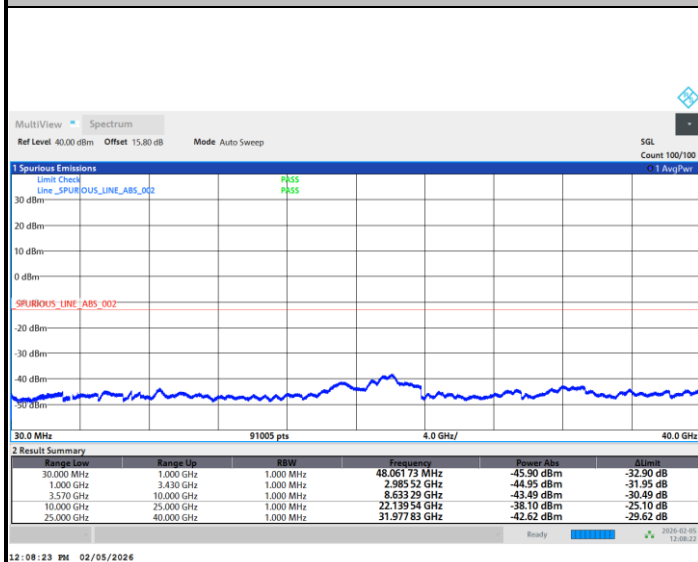

Frequency Stability

Test Conditions		FR1 n77 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0025	8.9	Yes	PASS
40	Normal Voltage	0.0015	5.1	Yes	
30	Normal Voltage	0.0007	-2.4	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0019	6.7	Yes	
0	Normal Voltage	0.0037	12.9	Yes	
-10	Normal Voltage	0.0036	12.6	Yes	
-20	Normal Voltage	0.0013	4.7	Yes	
-30	Normal Voltage	0.0020	7	Yes	
20	Maximum Voltage	0.0041	14.4	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0044	15.3	Yes	

Note:

1. Normal Voltage = 3.85 V. ; Minimum Voltage = 3.65 V. ; Maximum Voltage = 4.3 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.




Appendix B. Radiated Spurious Emission Test Data

B1.Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	NR SA n5	Part 22H	M	2483	-62.71	RMS	26.66	-24.21	0.91	-95.23	29.16	-13.00	-49.71	V	8
2	NR SA n26	Part 22H	M	2483	-58.23	RMS	26.66	-24.21	0.91	-95.23	33.64	-13.00	-45.23	V	8
3	EN-DC B2+n5	Part 22H	H	3321	-64.23	RMS	28.14	-23.85	1.06	-95.23	25.65	-13.00	-51.23	V	2+8
1	NR SA n2	Part 24E	L	5552	-46.74	RMS	32.71	-21.83	1.54	-95.23	36.07	-13.00	-33.74	V	8
2	EN-DC B7+n2	Part 24E	M	7485	-54.87	RMS	36.73	-21.17	1.52	-95.23	23.28	-13.00	-41.87	H	8+2
3	NR SA n25	Part 24E	L	5555	-47.56	RMS	32.72	-21.83	1.54	-95.23	35.24	-13.00	-34.56	H	8
1	NR SA n66	Part 27L	H	5255	-47.41	RMS	32.39	-21.73	1.90	-95.23	35.26	-13.00	-34.41	H	8
2	EN-DC B5+n66	Part 27L	L	3424	-55.31	RMS	28.35	-23.94	1.88	-95.23	33.63	-13.00	-42.31	H	8+2
3	NR SA n71	Part 27N	L	1329	-61.71	RMS	24.39	-25.66	1.07	-95.23	33.72	-13.00	-48.71	H	8
4	NR SA n7	Part 27M	L	7505	-46.01	RMS	36.69	-21.16	1.54	-95.23	32.15	-25.00	-21.01	H	1
5	NR SA n38	Part 27M	M	7732	-48.73	RMS	36.56	-21.36	1.57	-95.23	29.73	-25.00	-23.73	H	1
6	NR SA n41 HPUE	Part 27M	L	7495	-43.70	RMS	36.71	-21.16	1.53	-95.23	34.45	-25.00	-18.70	V	1
7	EN-DC B5+n7	Part 27M	L	7505	-42.10	RMS	36.69	-21.16	1.54	-95.23	36.06	-25.00	-17.10	H	8+1
8	NR SA n77	Part 27O	L	7407	-38.39	RMS	36.89	-21.25	1.70	-95.23	39.50	-13.00	-25.39	V	9
9	NR SA n78	Part 27O	H	7525	-39.09	RMS	36.65	-21.17	1.87	-95.23	38.80	-13.00	-26.09	H	9
10	EN-DC B7+n77	Part 27O	M	7627	-37.80	RMS	36.60	-21.24	1.93	-95.23	40.14	-13.00	-24.80	H	1+9
11	EN-DC B5+n78	Part 27O	L	7405	-34.02	RMS	36.89	-21.25	1.70	-95.23	43.87	-13.00	-21.02	V	8+9
12	NR SA n77	Part 27Q	L	10355	-40.53	RMS	37.38	-21.75	1.77	-95.23	37.30	-13.00	-27.53	H	9
13	NR SA n78	Part 27Q	H	10537	-43.16	RMS	37.37	-21.82	1.81	-95.23	34.71	-13.00	-30.16	H	9
14	EN-DC B7+n77	Part 27Q	L	10355	-41.32	RMS	37.38	-21.75	1.77	-95.23	36.51	-13.00	-28.32	V	1+9
15	EN-DC B5+n78	Part 27Q	L	6905	-39.04	RMS	36.01	-21.57	2.17	-95.23	39.58	-13.00	-26.04	H	8+9
24	NR SA n12	Part 27H	M	2103	-57.31	RMS	26.30	-24.71	0.85	-95.23	35.48	-13.00	-44.31	V	8
1	NR SA n26	Part 90S	L	2444	-55.14	RMS	26.68	-24.25	0.91	-95.23	36.75	-13.00	-42.14	V	8
2	NR SA n26	Part 90S	M	2444	-54.14	RMS	26.68	-24.25	0.91	-95.23	37.75	-13.00	-41.14	H	8



Ant. 8

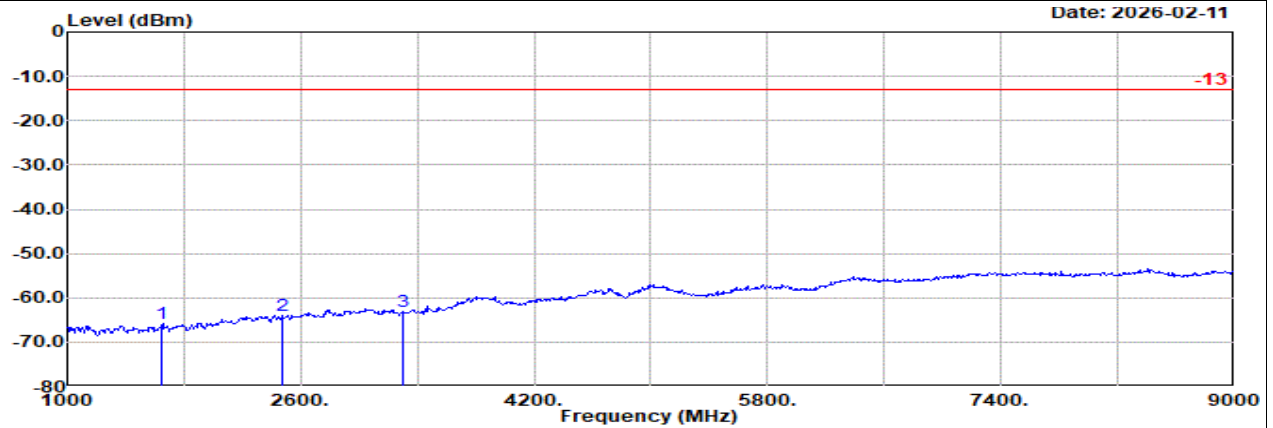
Part 22H Mode 1**NR SA n5 20M Ch166800 1RB1 BPSK****L**

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n5 20M Ch166800 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	Amp\Cb dB						
1	1651.00	-65.91	RMS	24.69	-25.13	1.08	-95.23	28.68	-13.00	-52.91	Horizontal
2	2476.00	-63.85	RMS	26.60	-24.21	0.91	-95.23	28.08	-13.00	-50.85	Horizontal
3	3301.00	-63.08	RMS	28.10	-23.84	1.06	-95.23	26.83	-13.00	-50.08	Horizontal

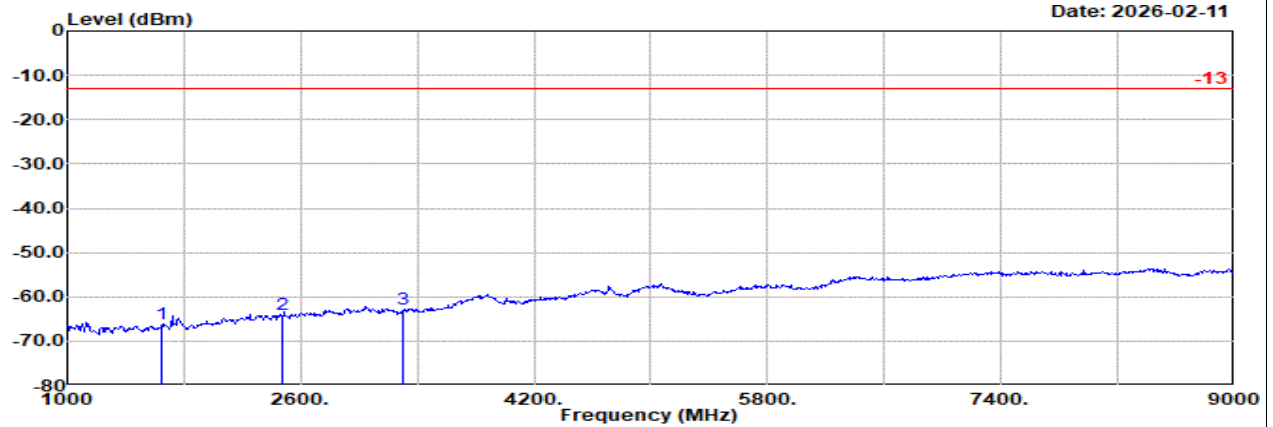

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n5 20M Ch166800 1RB1 BPSK


	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	Amp\Cb dB						
1	1651.00	-65.98	RMS	24.69	-25.13	1.08	-95.23	28.61	-13.00	-52.98	Vertical
2	2476.00	-64.05	RMS	26.60	-24.21	0.91	-95.23	27.88	-13.00	-51.05	Vertical
3	3301.00	-62.92	RMS	28.10	-23.84	1.06	-95.23	26.99	-13.00	-49.92	Vertical

Ant. 8

Part 22H Mode 1

NR SA n5 20M Ch167300 1RB1 BPSK

M

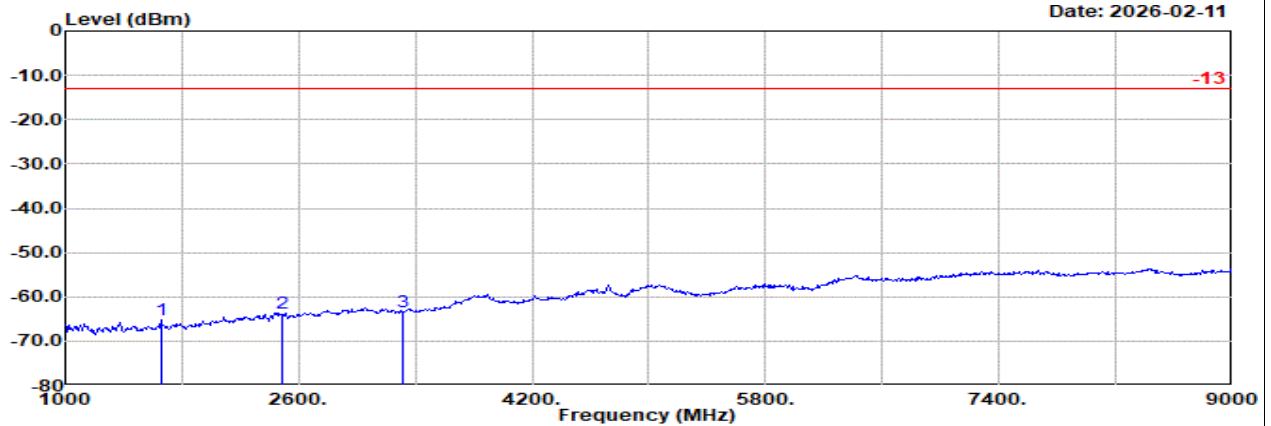


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1656.00	-65.23	RMS	24.64	-25.13	1.08	-95.23	29.41	-13.00	-52.23
2	2483.00	-63.65	RMS	26.66	-24.21	0.91	-95.23	28.22	-13.00	-50.65
3	3311.00	-63.33	RMS	28.12	-23.84	1.06	-95.23	26.56	-13.00	-50.33

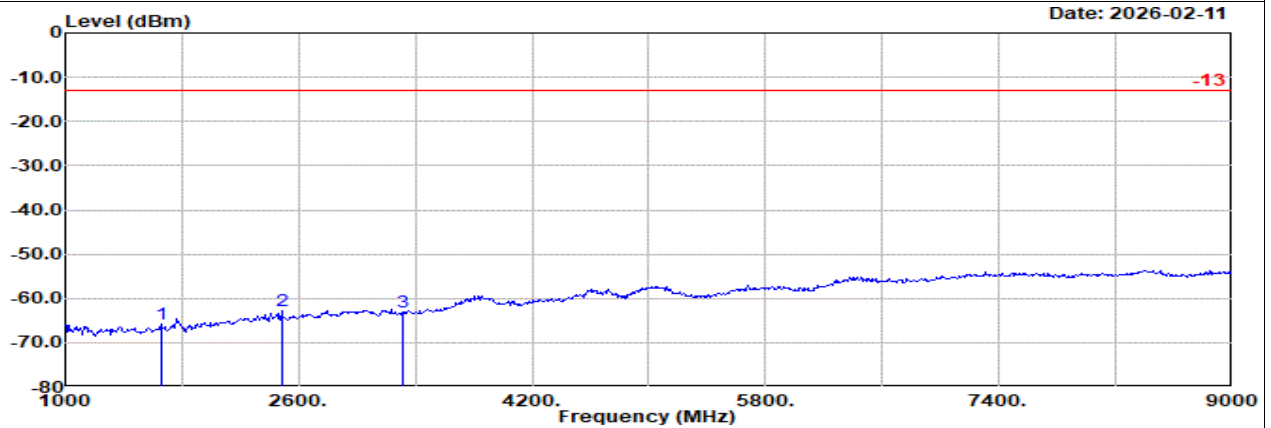

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1656.00	-65.87	RMS	24.64	-25.13	1.08	-95.23	28.77	-13.00	-52.87
2	2483.00	-62.71	RMS	26.66	-24.21	0.91	-95.23	29.16	-13.00	-49.71
3	3311.00	-63.16	RMS	28.12	-23.84	1.06	-95.23	26.73	-13.00	-50.16




Ant. 8

Part 22H Mode 1

NR SA n5 20M Ch167800 1RB1 BPSK

H

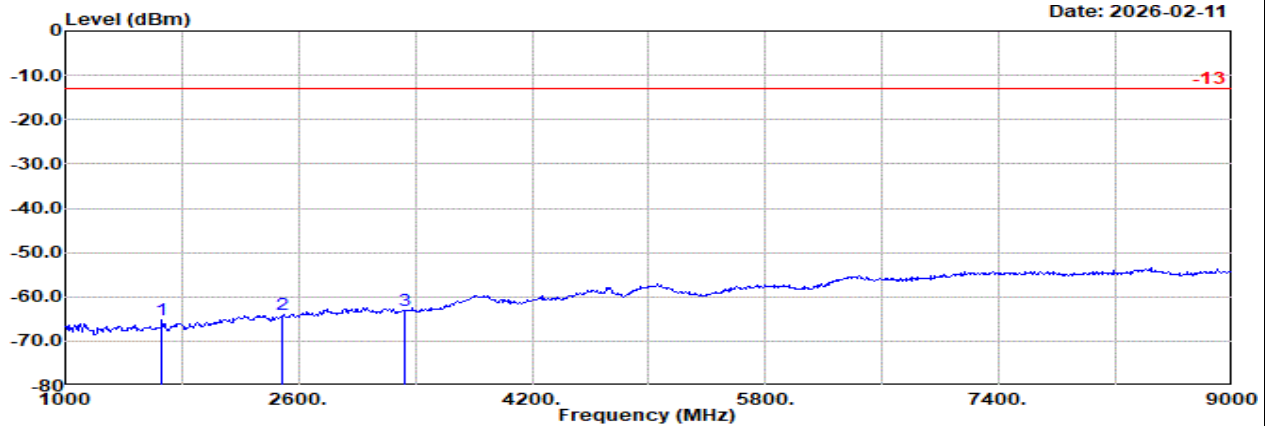


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n5 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1661.00	-65.25	RMS	24.60	-25.13	1.08	-95.23	29.43	-13.00	-52.25			Horizontal
2	2491.00	-63.98	RMS	26.80	-24.20	0.91	-95.23	27.74	-13.00	-50.98			Horizontal
3	3321.00	-62.95	RMS	28.14	-23.85	1.06	-95.23	26.93	-13.00	-49.95			Horizontal

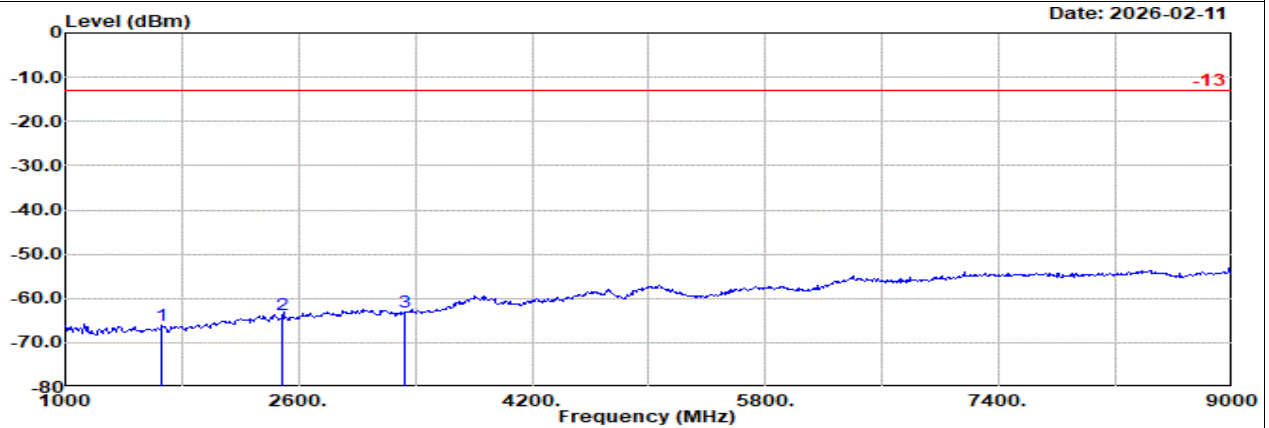

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n5 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1661.00	-66.00	RMS	24.60	-25.13	1.08	-95.23	28.68	-13.00	-53.00			Vertical
2	2491.00	-63.61	RMS	26.80	-24.20	0.91	-95.23	28.11	-13.00	-50.61			Vertical
3	3321.00	-63.05	RMS	28.14	-23.85	1.06	-95.23	26.83	-13.00	-50.05			Vertical




Ant. 8

Part 22H Mode 2

NR SA n26 20M Ch166800 1RB1 BPSK

L

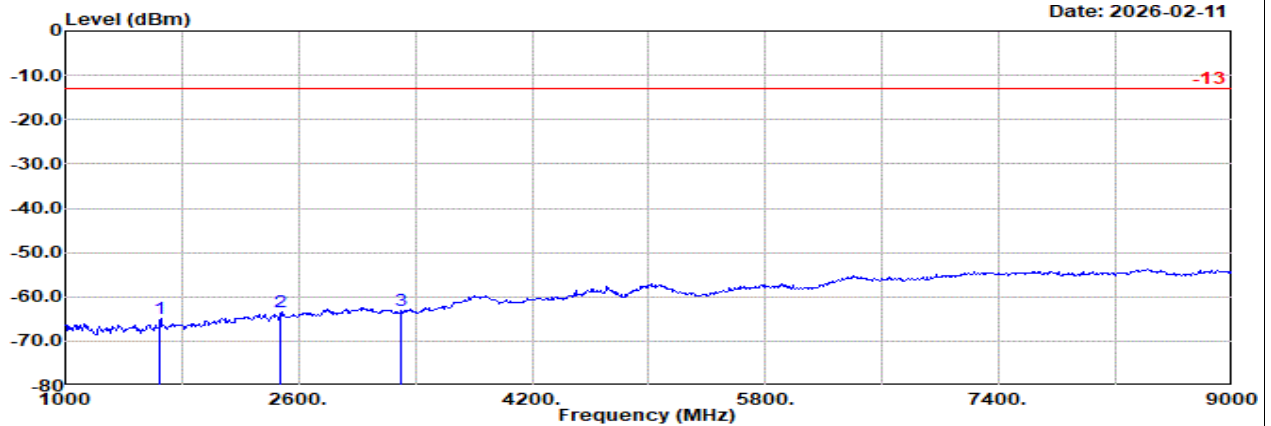


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1651.00	-64.80	RMS		24.69	-25.13	1.08	-95.23	29.79	-13.00	-51.80		Horizontal
2	2476.00	-63.41	RMS		26.60	-24.21	0.91	-95.23	28.52	-13.00	-50.41		Horizontal
3	3301.00	-63.22	RMS		28.10	-23.84	1.06	-95.23	26.69	-13.00	-50.22		Horizontal

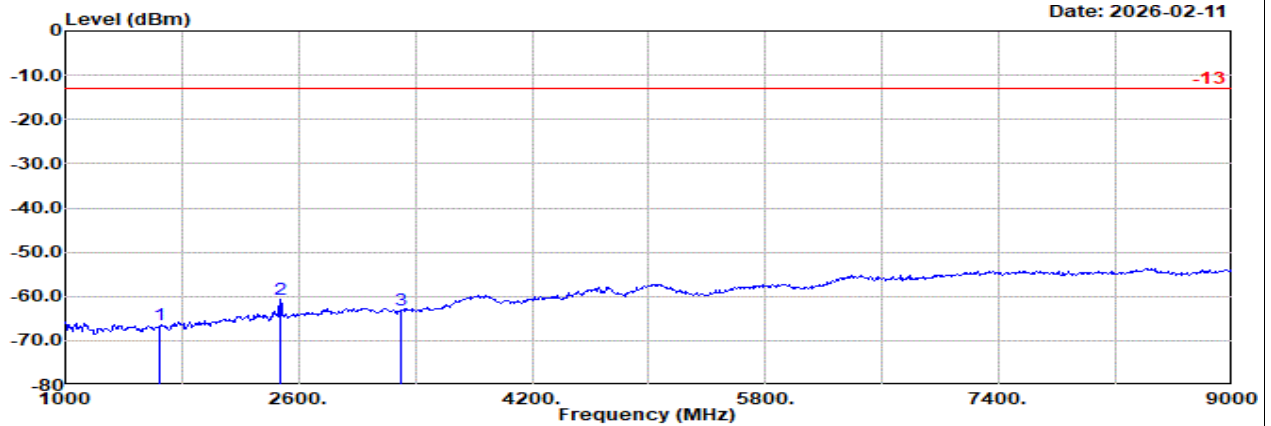

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 20M Ch166800 1RB1 BPSK


	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1651.00	-66.28	RMS		24.69	-25.13	1.08	-95.23	28.31	-13.00	-53.28		Vertical
2	2476.00	-60.71	RMS		26.60	-24.21	0.91	-95.23	31.22	-13.00	-47.71		Vertical
3	3301.00	-63.05	RMS		28.10	-23.84	1.06	-95.23	26.86	-13.00	-50.05		Vertical

Ant. 8

Part 22H Mode 2

NR SA n26 20M Ch167300 1RB1 BPSK

M

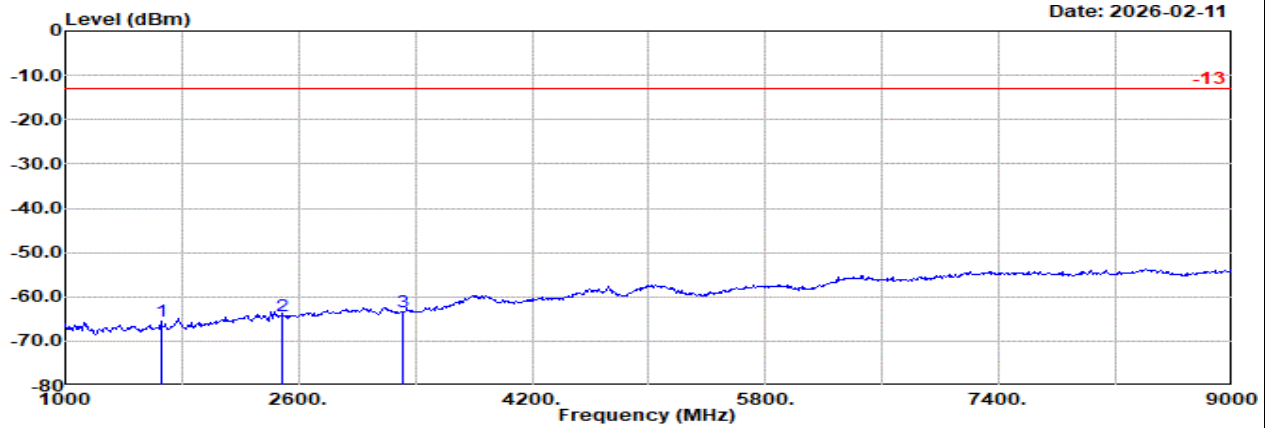


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1656.00	-65.60	RMS	24.64	-25.13	1.08	-95.23	29.04	-13.00	-52.60	Horizontal	
2	2483.00	-64.16	RMS	26.66	-24.21	0.91	-95.23	27.71	-13.00	-51.16	Horizontal	
3	3311.00	-63.30	RMS	28.12	-23.84	1.06	-95.23	26.59	-13.00	-50.30	Horizontal	

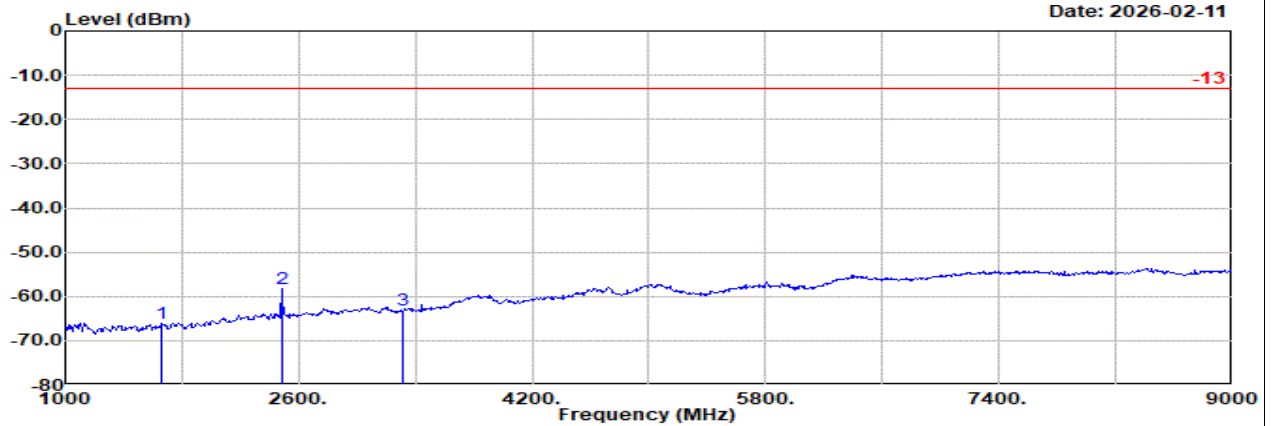

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 20M Ch167300 1RB1 BPSK


	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1656.00	-66.12	RMS	24.64	-25.13	1.08	-95.23	28.52	-13.00	-53.12	Vertical	
2	2483.00	-58.23	RMS	26.66	-24.21	0.91	-95.23	33.64	-13.00	-45.23	Vertical	
3	3311.00	-63.16	RMS	28.12	-23.84	1.06	-95.23	26.73	-13.00	-50.16	Vertical	

Ant. 8

Part 22H Mode 2

NR SA n26 20M Ch167800 1RB1 BPSK

H

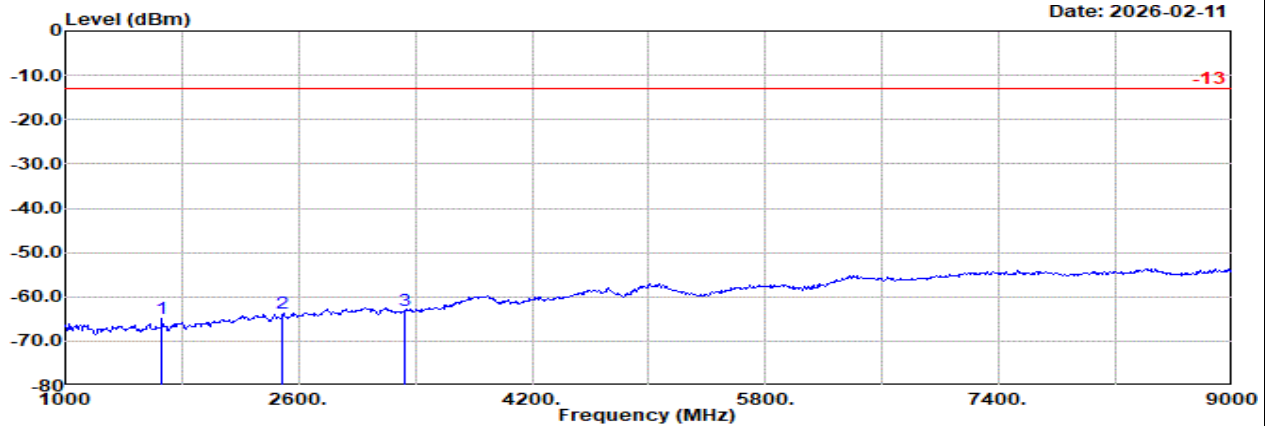


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1661.00	-65.01	RMS	24.60	-25.13	1.08	-95.23	29.67	-13.00	-52.01	Horizontal
2	2491.00	-63.57	RMS	26.80	-24.20	0.91	-95.23	28.15	-13.00	-50.57	Horizontal
3	3321.00	-63.24	RMS	28.14	-23.85	1.06	-95.23	26.64	-13.00	-50.24	Horizontal

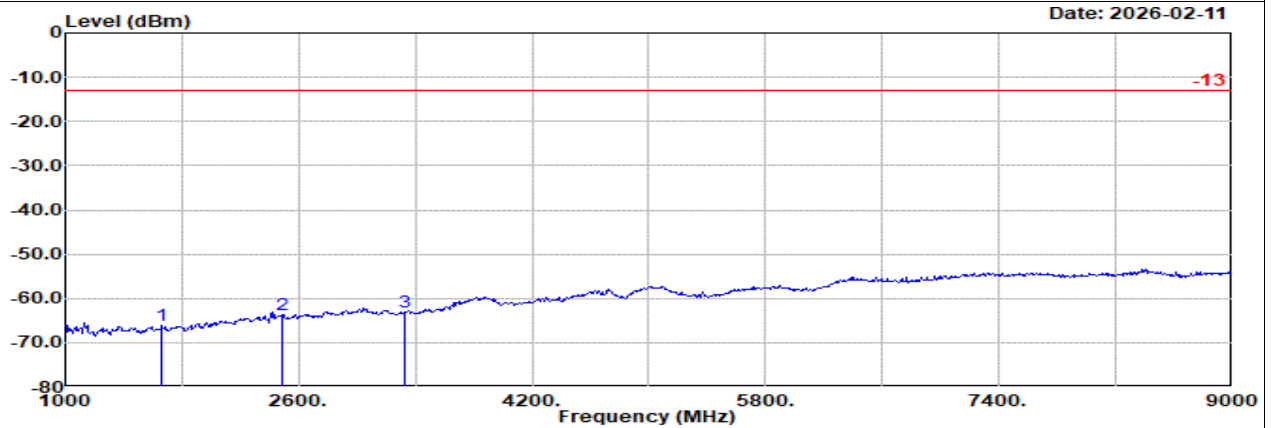

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1				g		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm		dB
1	1661.00	-66.24	RMS	24.60	-25.13	1.08	-95.23	28.44	-13.00	-53.24	Vertical
2	2491.00	-63.61	RMS	26.80	-24.20	0.91	-95.23	28.11	-13.00	-50.61	Vertical
3	3321.00	-63.03	RMS	28.14	-23.85	1.06	-95.23	26.85	-13.00	-50.03	Vertical




Ant. 2+8

Part 22H Mode 3

EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch166800 1RB1 BPSK

L

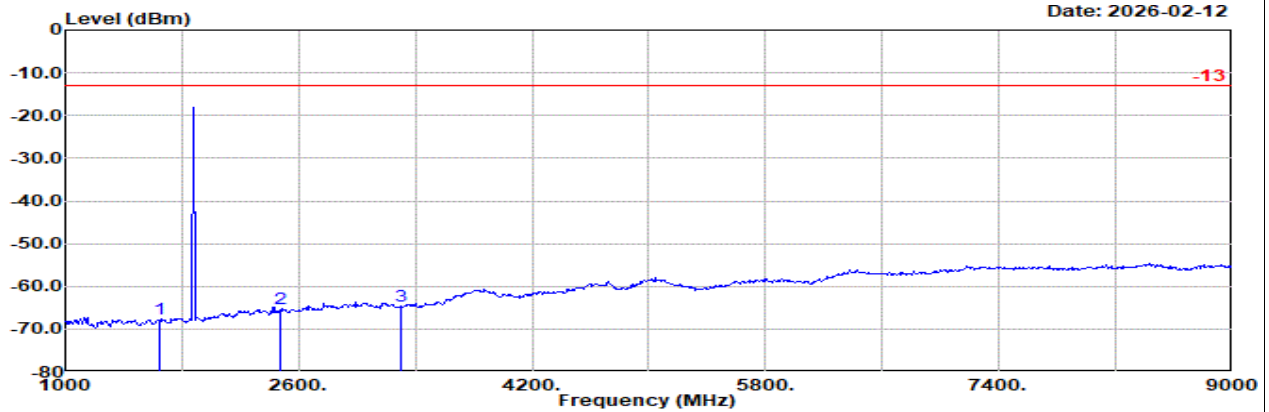


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1651.00	-67.71	RMS	24.69	-25.13	1.08	-95.23	26.88	-13.00	-54.71	Horizontal
2	2476.00	-65.33	RMS	26.60	-24.21	0.91	-95.23	26.60	-13.00	-52.33	Horizontal
3	3301.00	-64.61	RMS	28.10	-23.84	1.06	-95.23	25.30	-13.00	-51.61	Horizontal

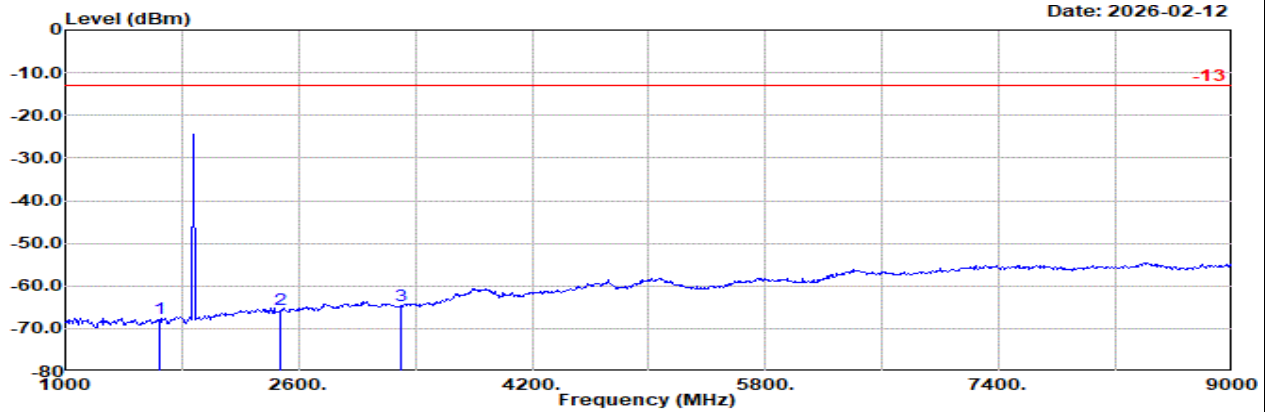

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1651.00	-67.65	RMS	24.69	-25.13	1.08	-95.23	26.94	-13.00	-54.65	Vertical
2	2476.00	-65.38	RMS	26.60	-24.21	0.91	-95.23	26.55	-13.00	-52.38	Vertical
3	3301.00	-64.61	RMS	28.10	-23.84	1.06	-95.23	25.30	-13.00	-51.61	Vertical




Ant. 2+8

Part 22H Mode 3

EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch167300 1RB1 BPSK

M

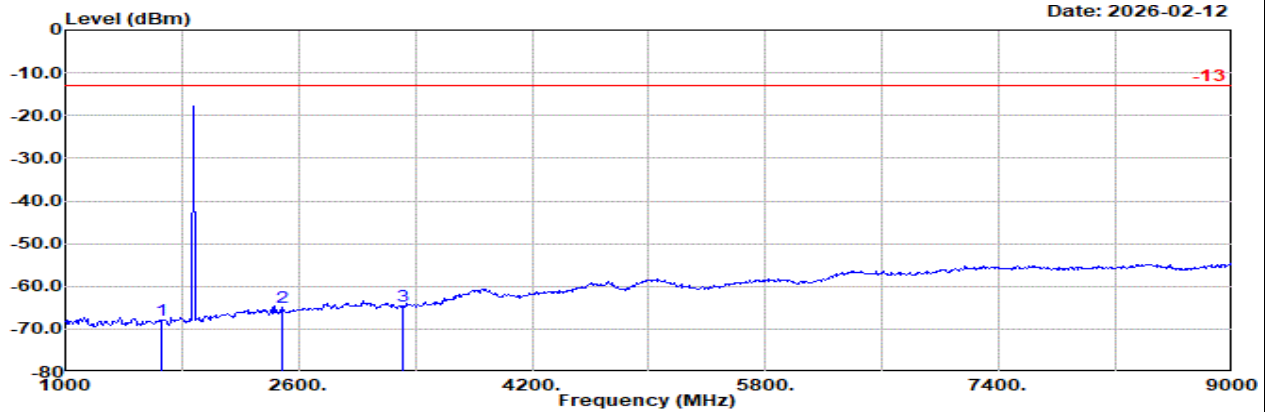


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Ant Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-67.91	RMS		24.64	-25.13	1.08	-95.23	26.73	-13.00	-54.91	Horizontal
2	2483.00	-64.87	RMS		26.66	-24.21	0.91	-95.23	27.00	-13.00	-51.87	Horizontal
3	3311.00	-64.49	RMS		28.12	-23.84	1.06	-95.23	25.40	-13.00	-51.49	Horizontal

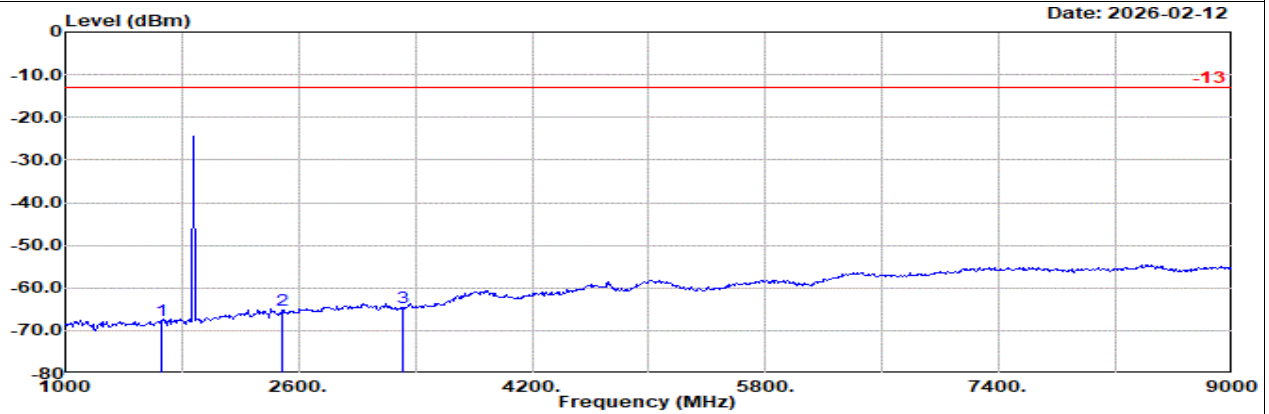

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Ant Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-67.62	RMS		24.64	-25.13	1.08	-95.23	27.02	-13.00	-54.62	Vertical
2	2483.00	-65.16	RMS		26.66	-24.21	0.91	-95.23	26.71	-13.00	-52.16	Vertical
3	3311.00	-64.68	RMS		28.12	-23.84	1.06	-95.23	25.21	-13.00	-51.68	Vertical




Ant. 2+8

Part 22H Mode 3

EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch167800 1RB1 BPSK

H

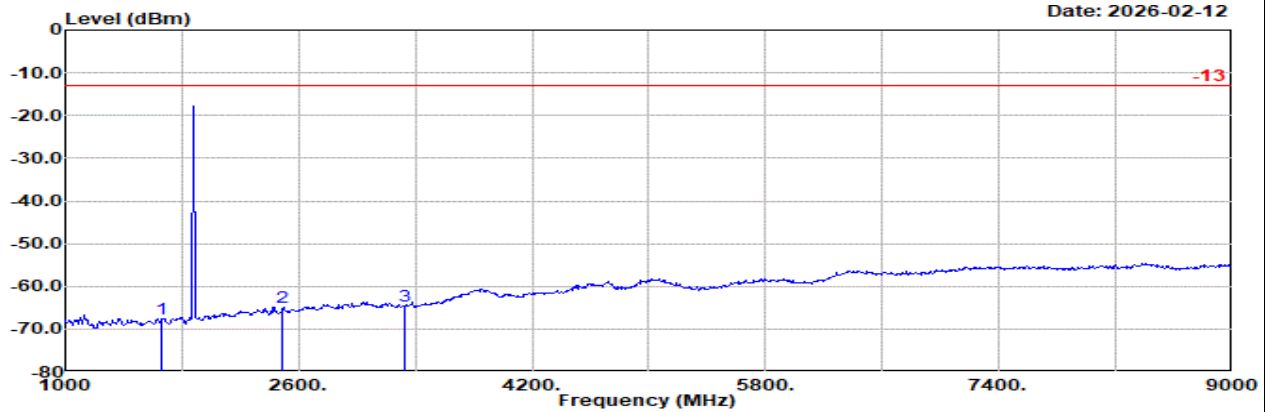


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	1661.00	-67.51	RMS	24.60	-25.13	1.08	-95.23	27.17	-13.00	-54.51	Horizontal	
2	2491.00	-64.80	RMS	26.80	-24.20	0.91	-95.23	26.92	-13.00	-51.80	Horizontal	
3	3321.00	-64.49	RMS	28.14	-23.85	1.06	-95.23	25.39	-13.00	-51.49	Horizontal	

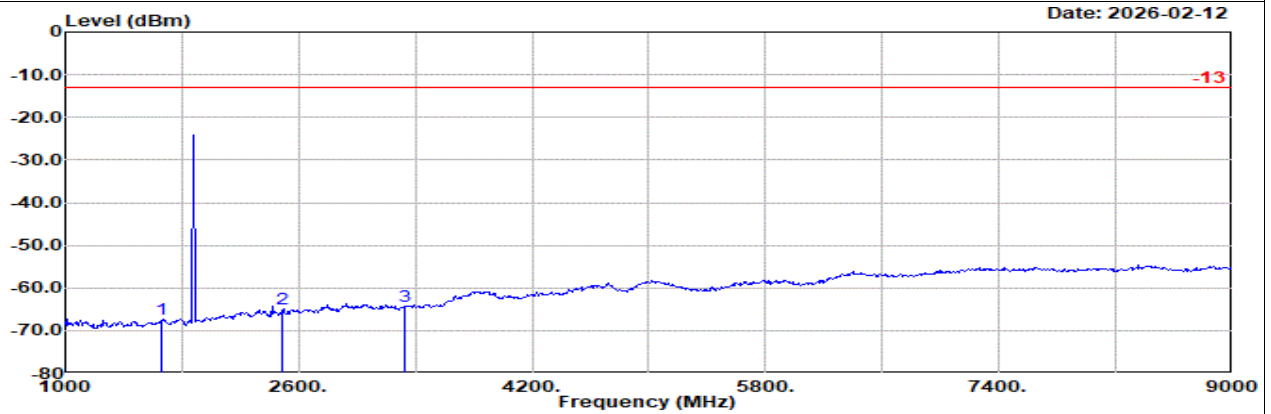

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n5 20M Ch167800 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	1661.00	-67.40	RMS	24.60	-25.13	1.08	-95.23	27.28	-13.00	-54.40	Vertical	
2	2491.00	-64.93	RMS	26.80	-24.20	0.91	-95.23	26.79	-13.00	-51.93	Vertical	
3	3321.00	-64.23	RMS	28.14	-23.85	1.06	-95.23	25.65	-13.00	-51.23	Vertical	




Ant. 8

Part 24E Mode 1

NR SA n2 10M Ch371000 1RB1 BPSK

L

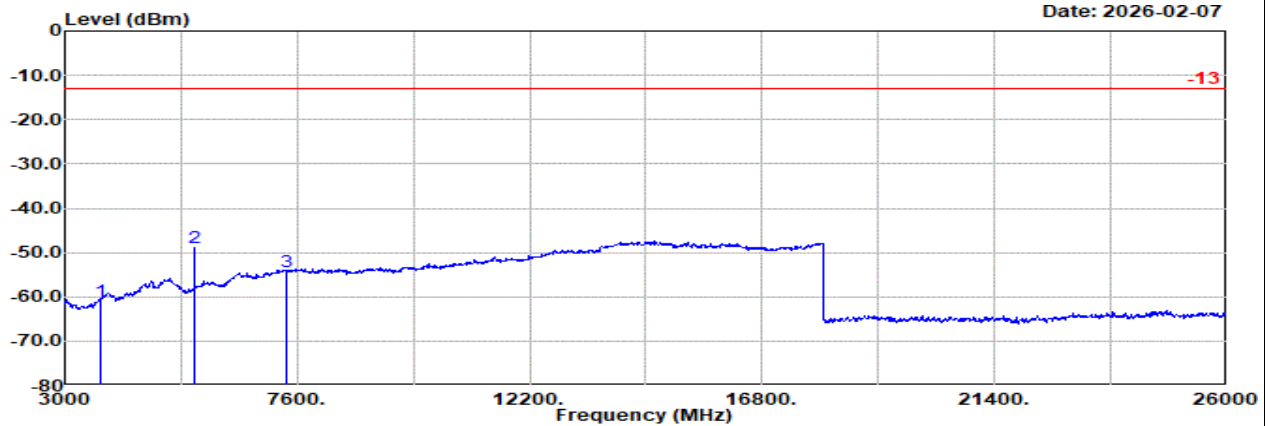


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch371000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit	Margin Pol	
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	3702.00	-60.88	RMS	29.62	-23.75	1.68	-95.23	26.80	-13.00	-47.88	Horizontal
2	5552.00	-49.00	RMS	32.71	-21.83	1.54	-95.23	33.81	-13.00	-36.00	Horizontal
3	7403.00	-54.24	RMS	36.89	-21.26	1.44	-95.23	23.92	-13.00	-41.24	Horizontal

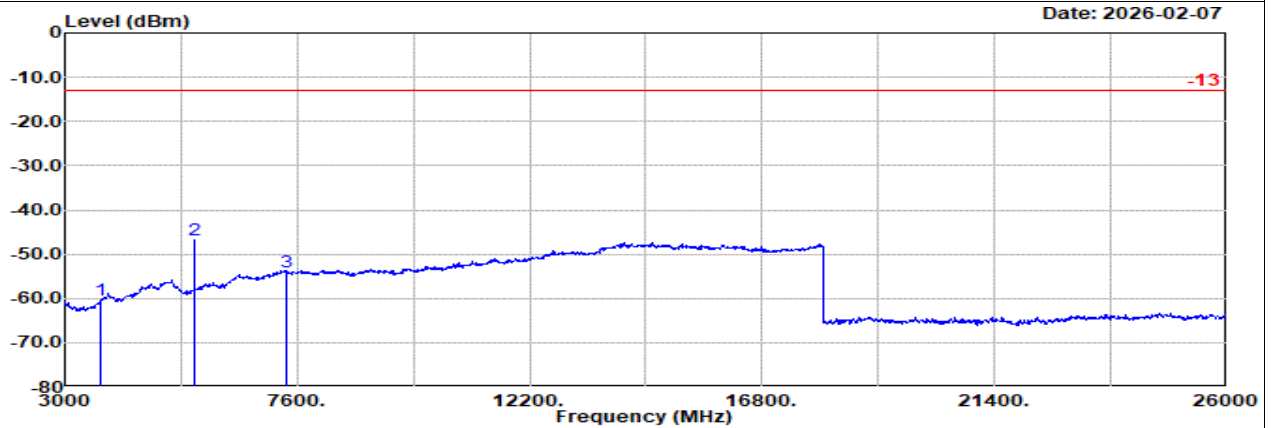

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch371000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit	Margin Pol	
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	3702.00	-60.38	RMS	29.62	-23.75	1.68	-95.23	27.30	-13.00	-47.38	Vertical
2	5552.00	-46.74	RMS	32.71	-21.83	1.54	-95.23	36.07	-13.00	-33.74	Vertical
3	7403.00	-54.12	RMS	36.89	-21.26	1.44	-95.23	24.04	-13.00	-41.12	Vertical




Ant. 8

Part 24E Mode 1

NR SA n2 10M Ch376000 1RB1 BPSK

M

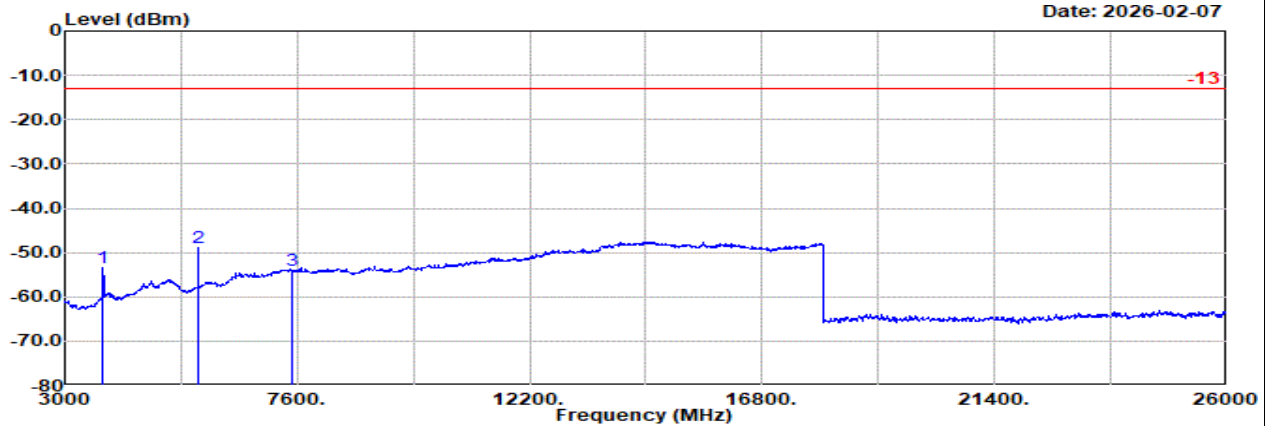


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	Factor	1		dB	dB	g		dBm	dB		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm	dB	
1	3752.00	-53.58	RMS	30.01	-23.64	1.67	-95.23	33.61	-13.00	-40.58	Horizontal
2	5627.00	-48.76	RMS	33.01	-21.84	1.53	-95.23	33.77	-13.00	-35.76	Horizontal
3	7503.00	-54.02	RMS	36.69	-21.16	1.54	-95.23	24.14	-13.00	-41.02	Horizontal

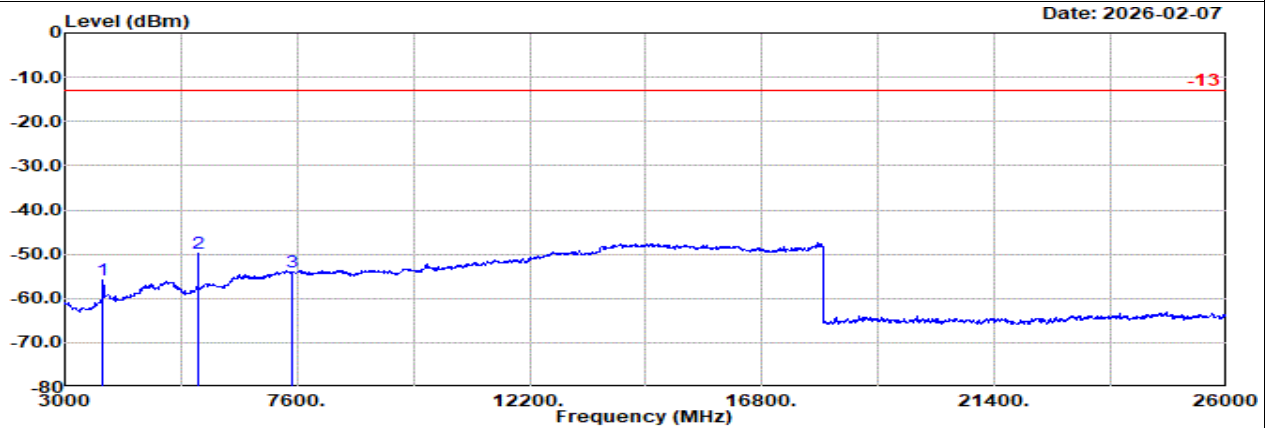

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l			g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3752.00	-55.99	RMS	30.01	-23.64	1.67	-95.23	31.20	-13.00	-42.99	Vertical
2	5627.00	-49.77	RMS	33.01	-21.84	1.53	-95.23	32.76	-13.00	-36.77	Vertical
3	7503.00	-53.92	RMS	36.69	-21.16	1.54	-95.23	24.24	-13.00	-40.92	Vertical




Ant. 8

Part 24E Mode 1

NR SA n2 10M Ch381000 1RB1 BPSK

H

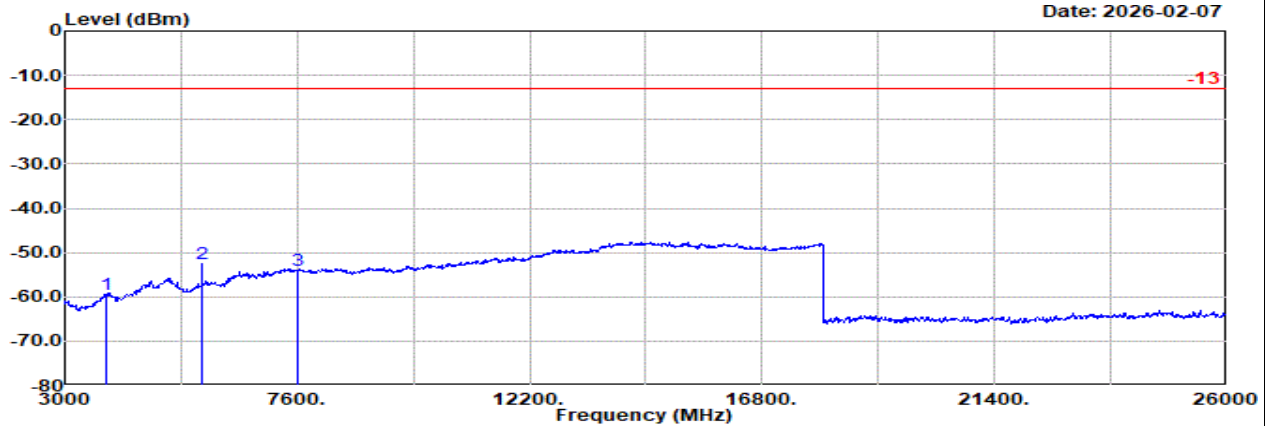


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch381000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	dB		dB	dB				
1	3802.00	-59.50	RMS	30.22	-23.53	1.67	-95.23	27.37	-13.00	-46.50	Horizontal	
2	5702.00	-52.54	RMS	33.41	-21.84	1.58	-95.23	29.54	-13.00	-39.54	Horizontal	
3	7603.00	-54.00	RMS	36.60	-21.22	1.63	-95.23	24.22	-13.00	-41.00	Horizontal	

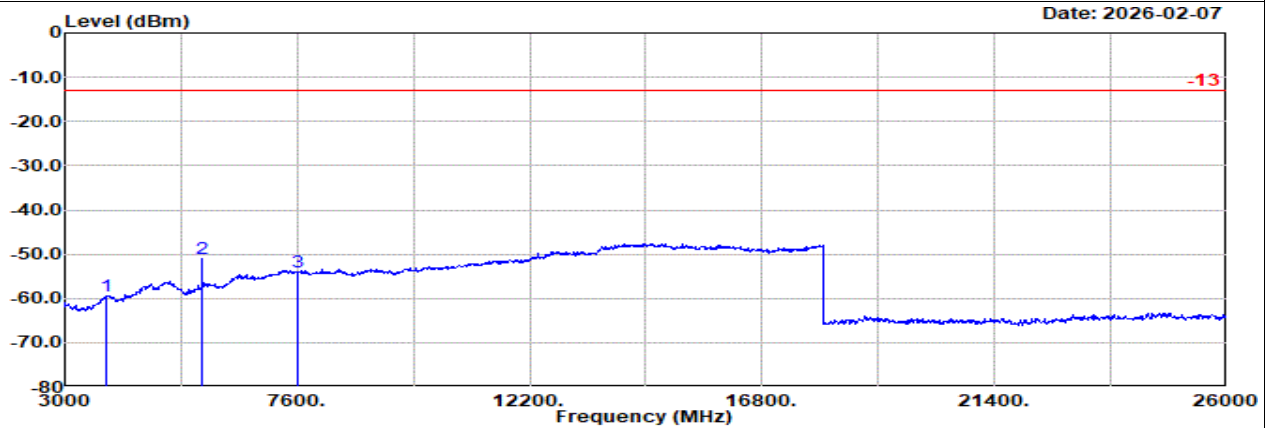

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch381000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	dB		dB	dB				
1	3802.00	-59.52	RMS	30.22	-23.53	1.67	-95.23	27.35	-13.00	-46.52	Vertical	
2	5702.00	-50.91	RMS	33.41	-21.84	1.58	-95.23	31.17	-13.00	-37.91	Vertical	
3	7603.00	-53.98	RMS	36.60	-21.22	1.63	-95.23	24.24	-13.00	-40.98	Vertical	




Ant. 8

Part 24E Mode 3

NR SA n25 25M Ch372500 1RB1 BPSK

L

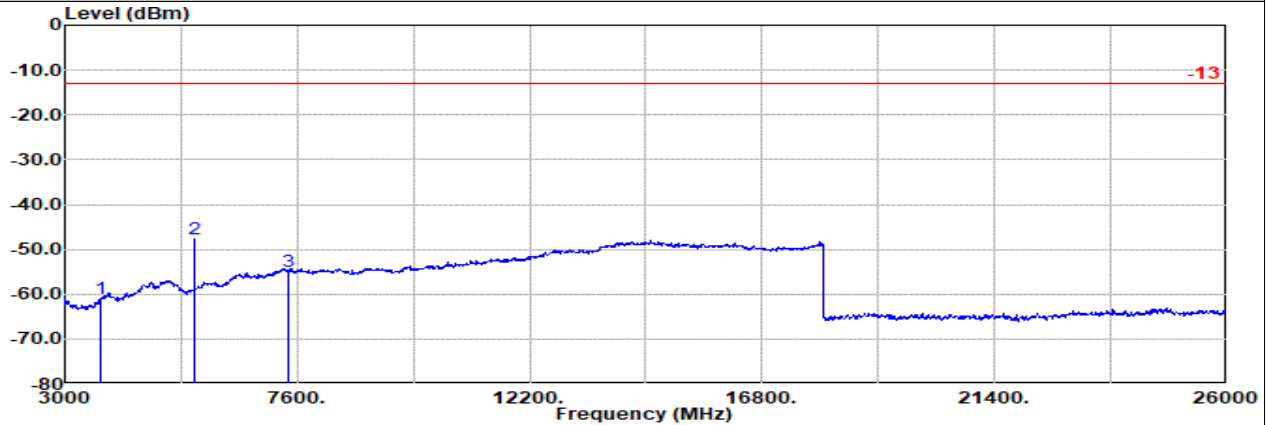


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch371000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB			dBuV	dBm	dB	
1	3703.00	-61.12	RMS	29.62	-23.74	1.68	-95.23	0.00	-13.00	-48.12	Horizontal			
2	5555.00	-47.56	RMS	32.72	-21.83	1.54	-95.23	35.24	-13.00	-34.56	Horizontal			
3	7406.00	-54.87	RMS	36.89	-21.25	1.45	-95.23	23.27	-13.00	-41.87	Horizontal			

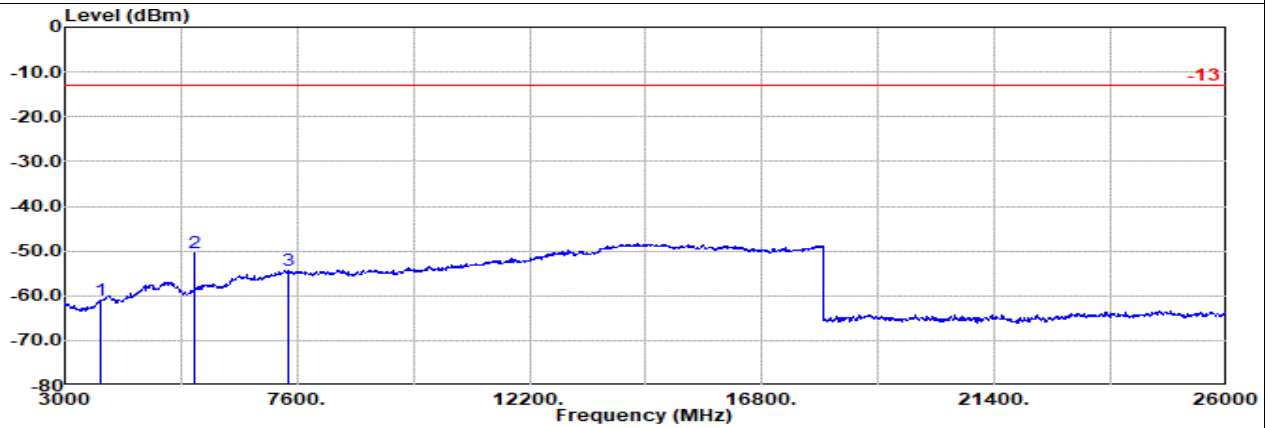

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch371000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB			dBuV	dBm	dB	
1	3703.00	-61.06	RMS	29.62	-23.74	1.68	-95.23	26.61	-13.00	-48.06	Vertical			
2	5555.00	-50.49	RMS	32.72	-21.83	1.54	-95.23	32.31	-13.00	-37.49	Vertical			
3	7406.00	-54.27	RMS	36.89	-21.25	1.45	-95.23	23.87	-13.00	-41.27	Vertical			




Ant. 8

Part 24E Mode 3

NR SA n25 25M Ch376500 1RB1 BPSK

M

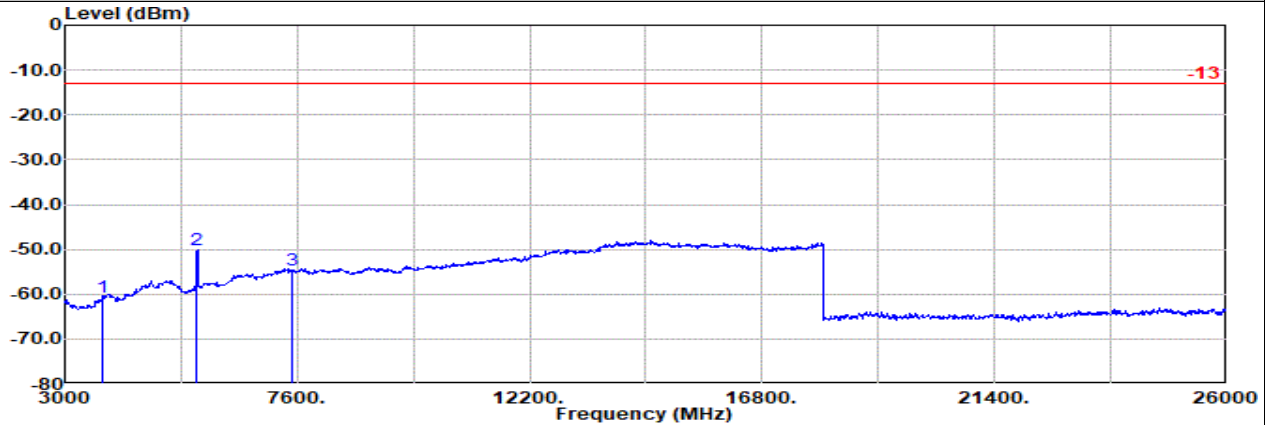


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch376000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBm	dB		
1	3743.00	-60.67	RMS	29.94	-23.66	1.68	-95.23	26.60	-13.00	-47.67	Horizontal
2	5615.00	-50.02	RMS	32.96	-21.84	1.53	-95.23	32.56	-13.00	-37.02	Horizontal
3	7486.00	-54.61	RMS	36.73	-21.17	1.52	-95.23	23.54	-13.00	-41.61	Horizontal

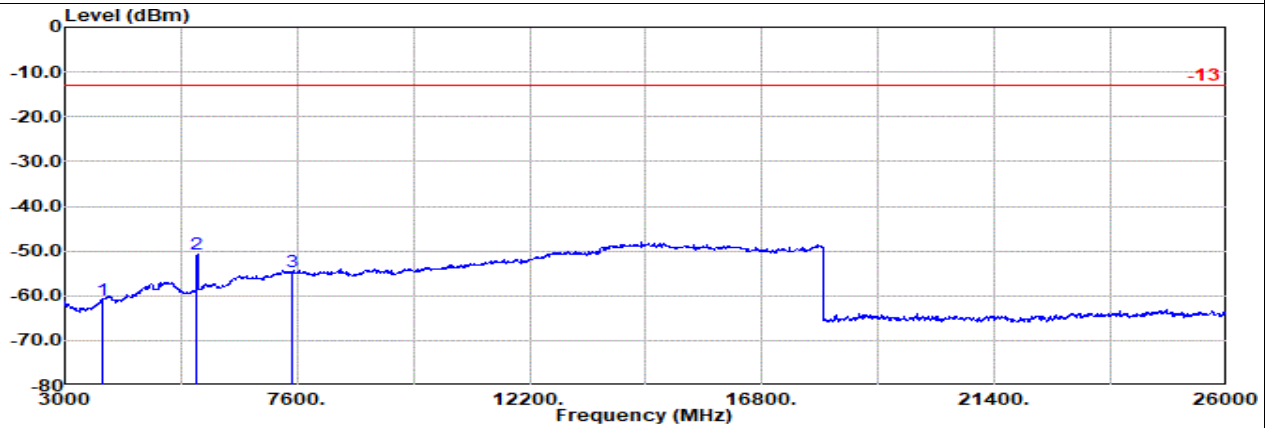

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch376000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBm	dB		
1	3743.00	-60.96	RMS	29.94	-23.66	1.68	-95.23	26.31	-13.00	-47.96	Vertical
2	5615.00	-50.66	RMS	32.96	-21.84	1.53	-95.23	31.92	-13.00	-37.66	Vertical
3	7486.00	-54.78	RMS	36.73	-21.17	1.52	-95.23	23.37	-13.00	-41.78	Vertical




Ant. 8

Part 24E Mode 3

NR SA n25 25M Ch380500 1RB1 BPSK

H

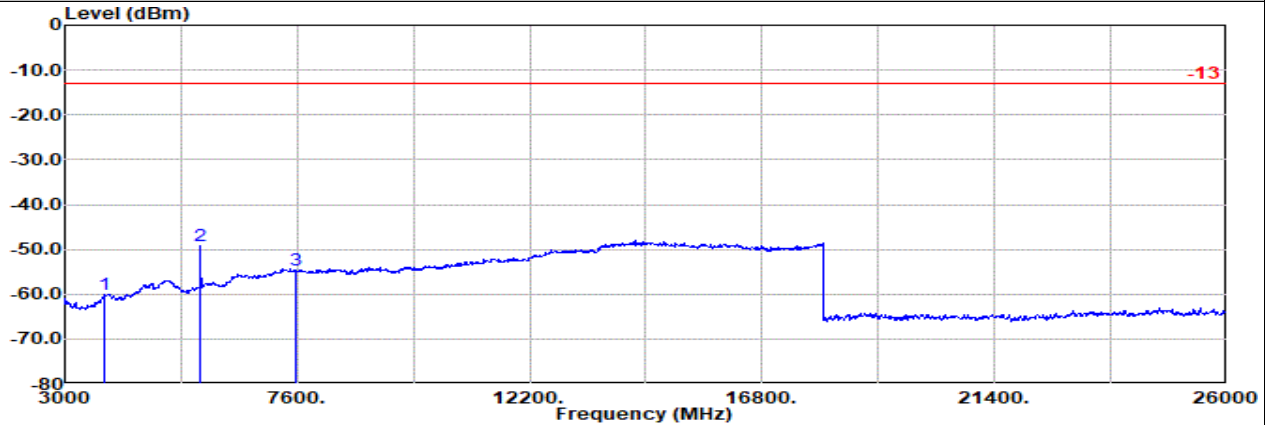


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n2 10M Ch381000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	3783.00	-59.98	RMS	30.13	-23.57	1.67	-95.23	27.02	-13.00	-46.98 Horizontal
2	5675.00	-49.07	RMS	33.25	-21.84	1.56	-95.23	33.19	-13.00	-36.07 Horizontal
3	7566.00	-54.57	RMS	36.60	-21.20	1.60	-95.23	23.66	-13.00	-41.57 Horizontal

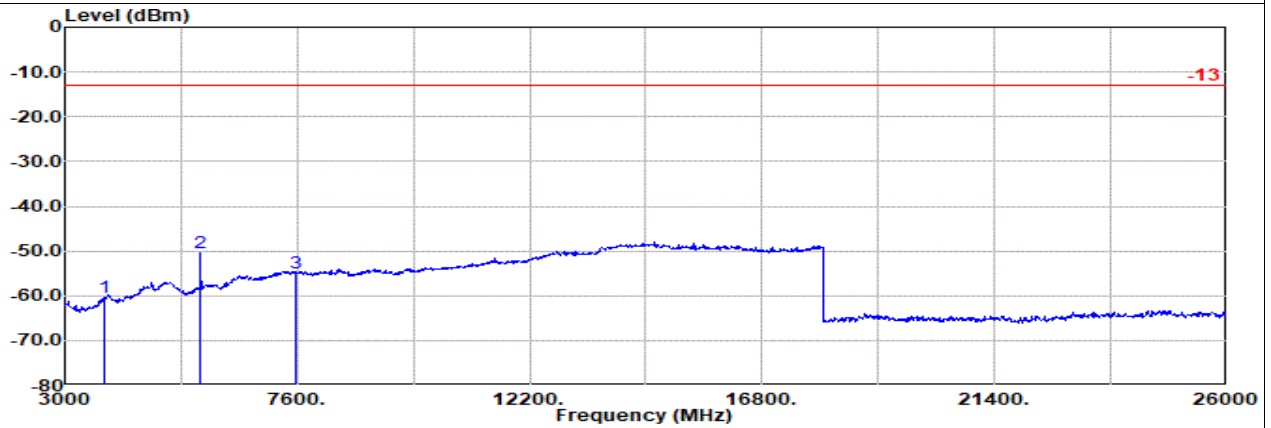

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n2 10M Ch381000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	3783.00	-60.43	RMS	30.13	-23.57	1.67	-95.23	26.57	-13.00	-47.43 Vertical
2	5675.00	-50.34	RMS	33.25	-21.84	1.56	-95.23	31.92	-13.00	-37.34 Vertical
3	7566.00	-54.83	RMS	36.60	-21.20	1.60	-95.23	23.40	-13.00	-41.83 Vertical




Ant. 8+2

Part 24E Mode 2

EN-DC B7+n2 10M + 20M Ch21100 1RB0 QPSK + Ch372000 1RB1 BPSK

L

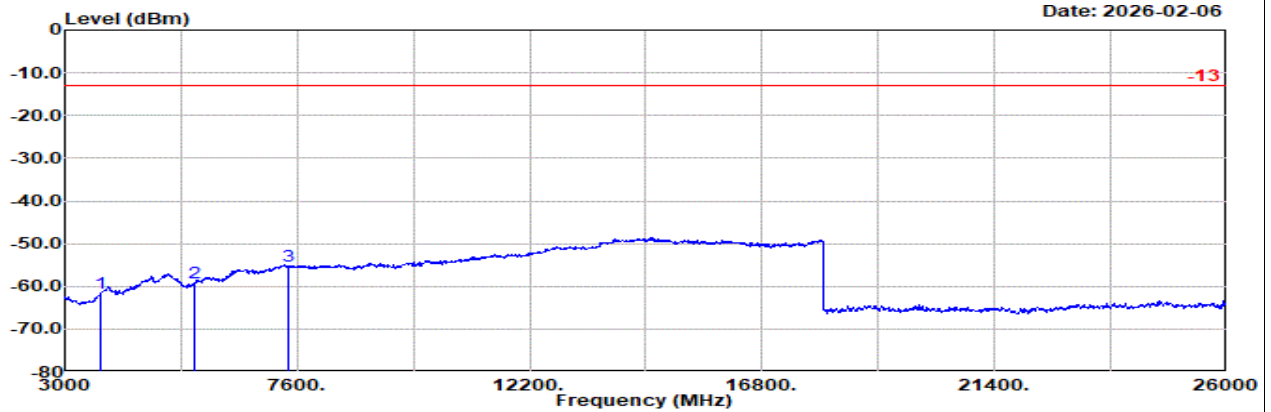


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch 21100 1RB0 QPSK

: SA n2 20M Ch372000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3703.00	-61.65	RMS	29.62	-23.74	1.68	-95.23	0.00	-13.00	-48.65	Horizontal
2	5554.00	-59.25	RMS	32.72	-21.83	1.54	-95.23	23.55	-13.00	-46.25	Horizontal
3	7405.00	-55.30	RMS	36.89	-21.25	1.44	-95.23	22.85	-13.00	-42.30	Horizontal

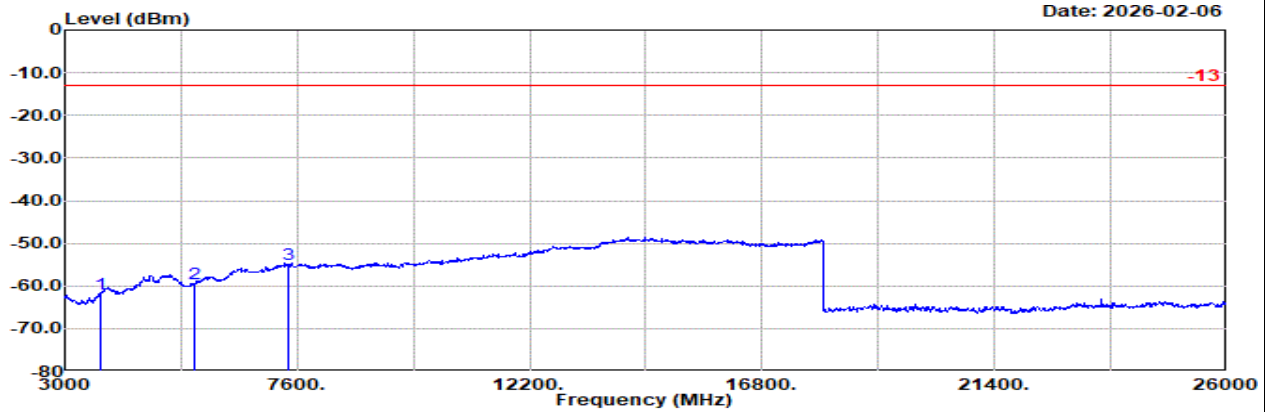

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch 21100 1RB0 QPSK

: SA n2 20M Ch372000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3703.00	-61.75	RMS	29.62	-23.74	1.68	-95.23	25.92	-13.00	-48.75	Vertical
2	5554.00	-59.35	RMS	32.72	-21.83	1.54	-95.23	23.45	-13.00	-46.35	Vertical
3	7405.00	-54.93	RMS	36.89	-21.25	1.44	-95.23	23.22	-13.00	-41.93	Vertical




Ant. 8+2

Part 24E Mode 2


EN-DC B7+n2 10M + 20M Ch21100 1RB0 QPSK + Ch376000 1RB1 BPSK

M

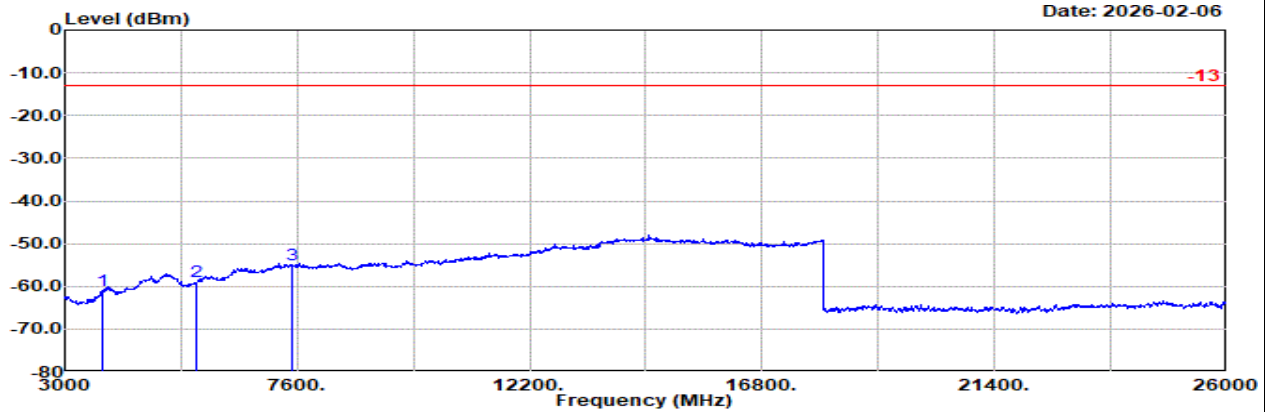

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE Band 7 10M Ch 21100 1RB0 QPSK
: SA n2 20M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	3743.00	-61.10	RMS	29.94	-23.66	1.68	-95.23		26.17	-13.00	-48.10	Horizontal
2	5614.00	-58.84	RMS	32.96	-21.84	1.53	-95.23		23.74	-13.00	-45.84	Horizontal
3	7485.00	-54.87	RMS	36.73	-21.17	1.52	-95.23		23.28	-13.00	-41.87	Horizontal

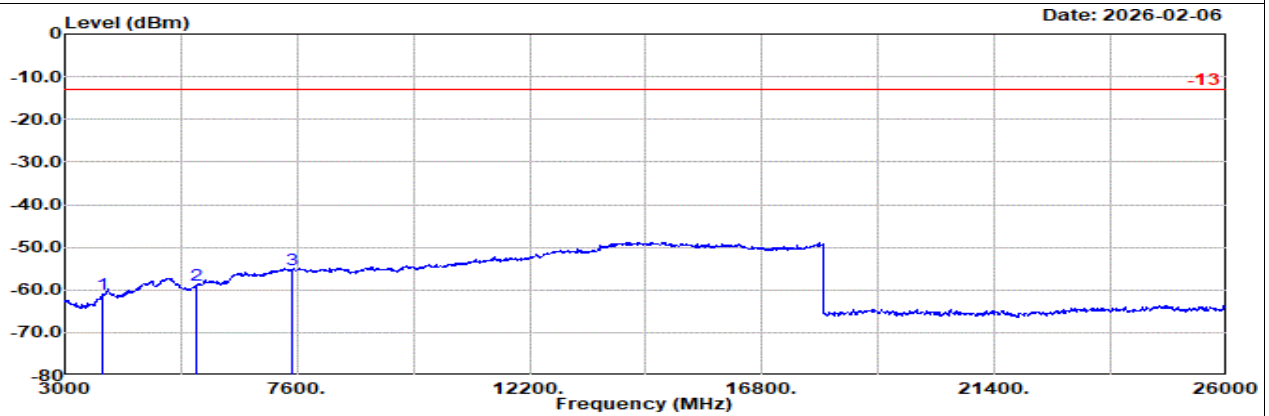

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE Band 7 10M Ch 21100 1RB0 QPSK
: SA n2 20M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	3743.00	-60.90	RMS	29.94	-23.66	1.68	-95.23		26.37	-13.00	-47.90	Vertical
2	5614.00	-58.88	RMS	32.96	-21.84	1.53	-95.23		23.70	-13.00	-45.88	Vertical
3	7485.00	-55.16	RMS	36.73	-21.17	1.52	-95.23		22.99	-13.00	-42.16	Vertical




Ant. 8+2

Part 24E Mode 2

EN-DC B7+n2 10M + 20M Ch21100 1RB0 QPSK + Ch380000 1RB1 BPSK

H

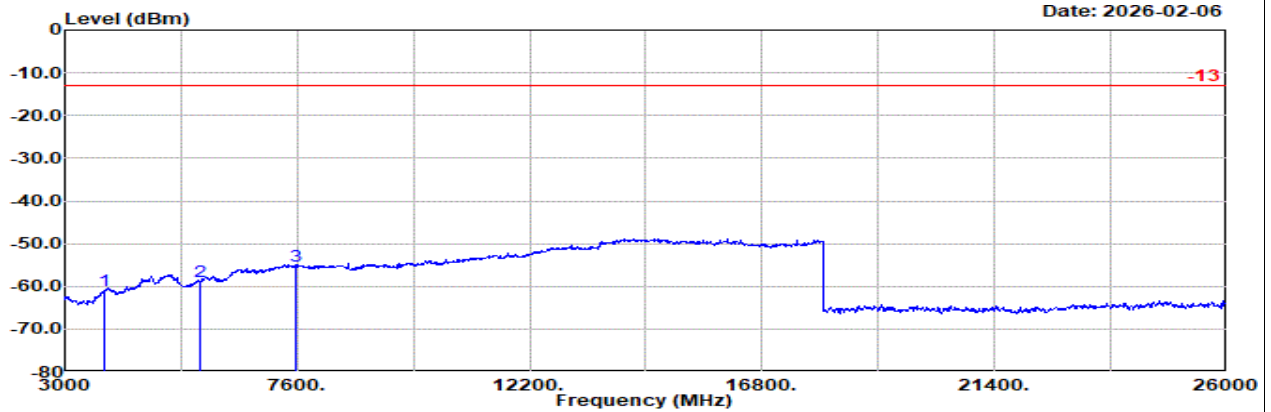


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch 21100 1RB0 QPSK

: SA n2 20M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1	dB		dB	g		
1	3783.00	-61.12	RMS	30.13	-23.57	1.67	-95.23	25.88	-13.00	-48.12	Horizontal
2	5674.00	-58.77	RMS	33.24	-21.84	1.56	-95.23	23.50	-13.00	-45.77	Horizontal
3	7565.00	-55.35	RMS	36.60	-21.20	1.60	-95.23	22.88	-13.00	-42.35	Horizontal

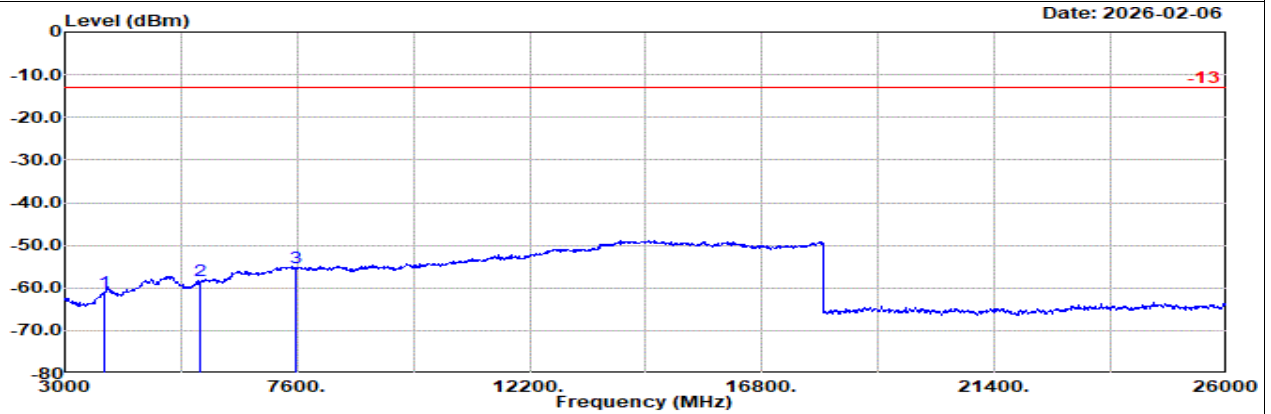

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch 21100 1RB0 QPSK

: SA n2 20M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l			g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3783.00	-61.09	RMS	30.13	-23.57	1.67	-95.23	25.91	-13.00	-48.09	Vertical
2	5674.00	-58.31	RMS	33.24	-21.84	1.56	-95.23	23.96	-13.00	-45.31	Vertical
3	7565.00	-55.25	RMS	36.60	-21.20	1.60	-95.23	22.98	-13.00	-42.25	Vertical




Ant. 8

Part 27L Mode 1

NR SA n66 30M Ch345000 1RB1 BPSK

L

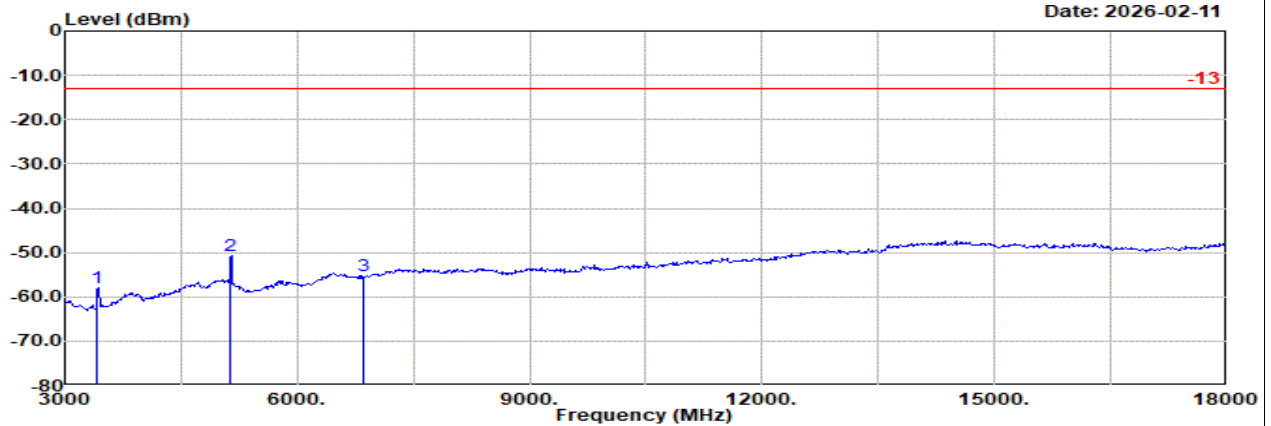


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 30M Ch345000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB				dB	dBuV		
1	3424.00	-58.07	RMS	28.35	-23.94	1.88	-95.23	30.87	-13.00	-45.07	Horizontal	
2	5135.00	-50.71	RMS	32.50	-21.67	2.09	-95.23	31.60	-13.00	-37.71	Horizontal	
3	6847.00	-55.20	RMS	35.99	-21.56	1.46	-95.23	24.14	-13.00	-42.20	Horizontal	

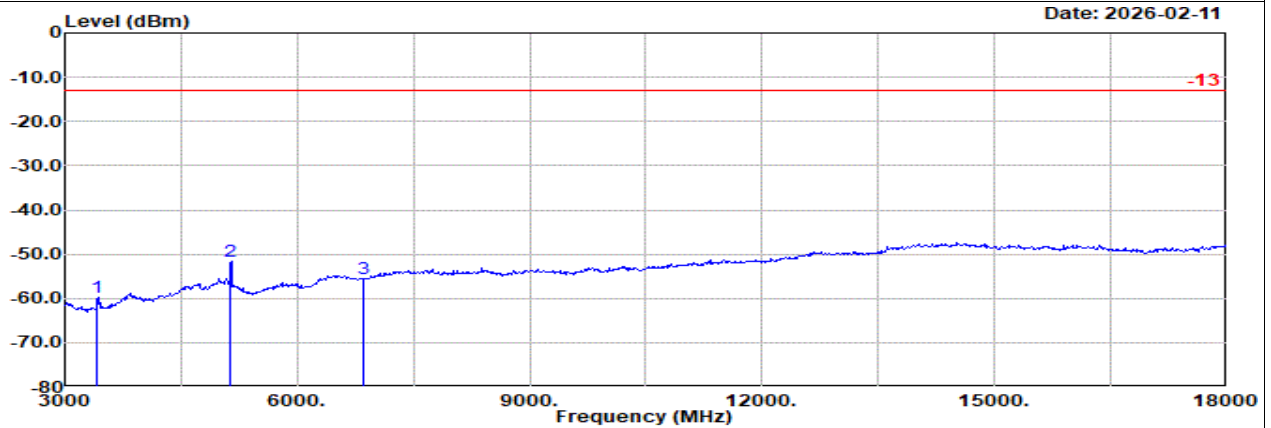

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 30M Ch345000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l			g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3424.00	-59.82	RMS	28.35	-23.94	1.88	-95.23	29.12	-13.00	-46.82	Vertical
2	5135.00	-51.51	RMS	32.50	-21.67	2.09	-95.23	30.80	-13.00	-38.51	Vertical
3	6847.00	-55.56	RMS	35.99	-21.56	1.46	-95.23	23.78	-13.00	-42.56	Vertical




Ant. 8

Part 27L Mode 1

NR SA n66 30M Ch349000 1RB1 BPSK

M

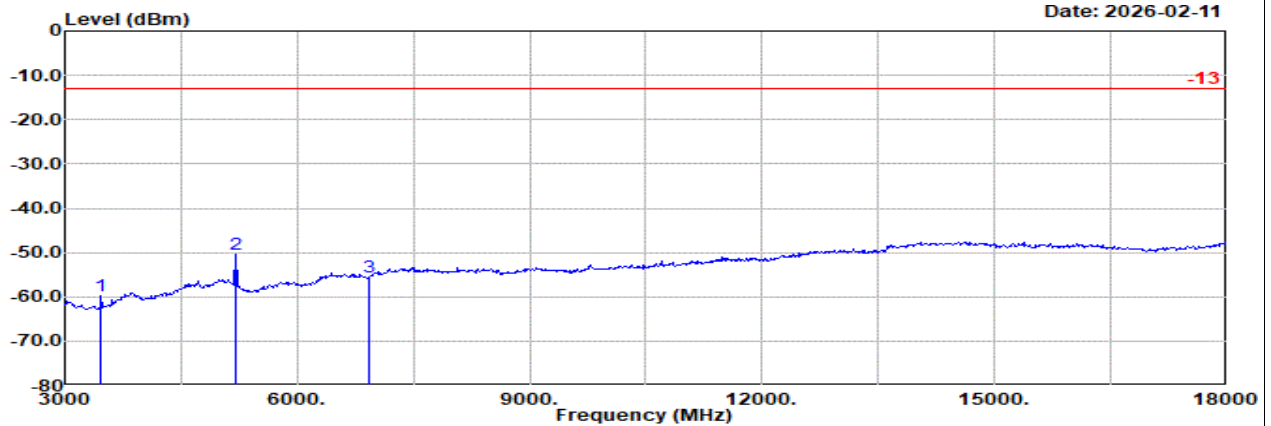


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 30M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBm	dB		
1	3464.00	-59.74	RMS	28.48	-24.00	1.84	-95.23	29.17	-13.00	-46.74	Horizontal
2	5195.00	-50.29	RMS	32.50	-21.71	2.01	-95.23	32.14	-13.00	-37.29	Horizontal
3	6927.00	-55.62	RMS	36.05	-21.58	1.44	-95.23	23.70	-13.00	-42.62	Horizontal

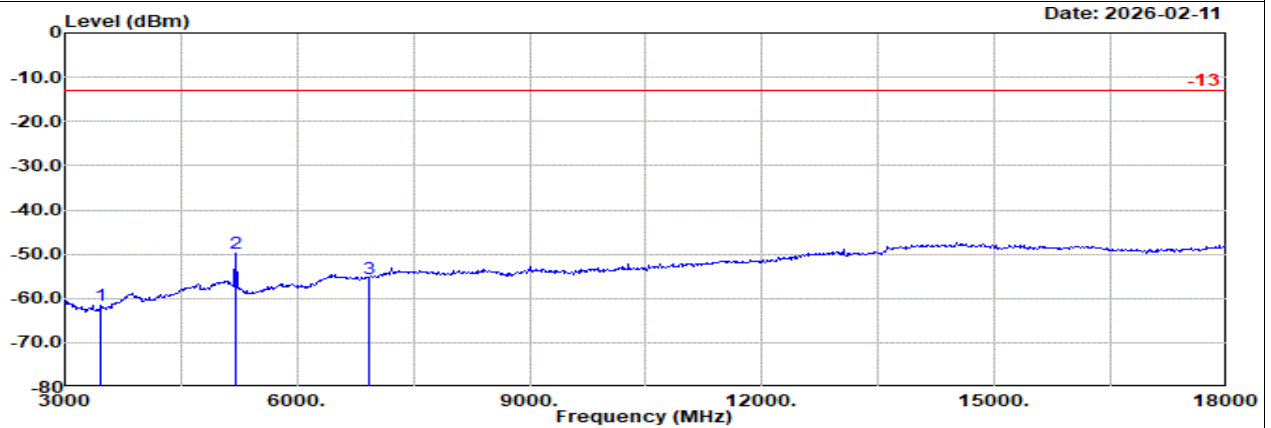

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 30M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBm	dB		
1	3464.00	-61.65	RMS	28.48	-24.00	1.84	-95.23	27.26	-13.00	-48.65	Vertical
2	5195.00	-49.87	RMS	32.50	-21.71	2.01	-95.23	32.56	-13.00	-36.87	Vertical
3	6927.00	-55.54	RMS	36.05	-21.58	1.44	-95.23	23.78	-13.00	-42.54	Vertical




Ant. 8

Part 27L Mode 1

NR SA n66 30M Ch353000 1RB1 BPSK

H

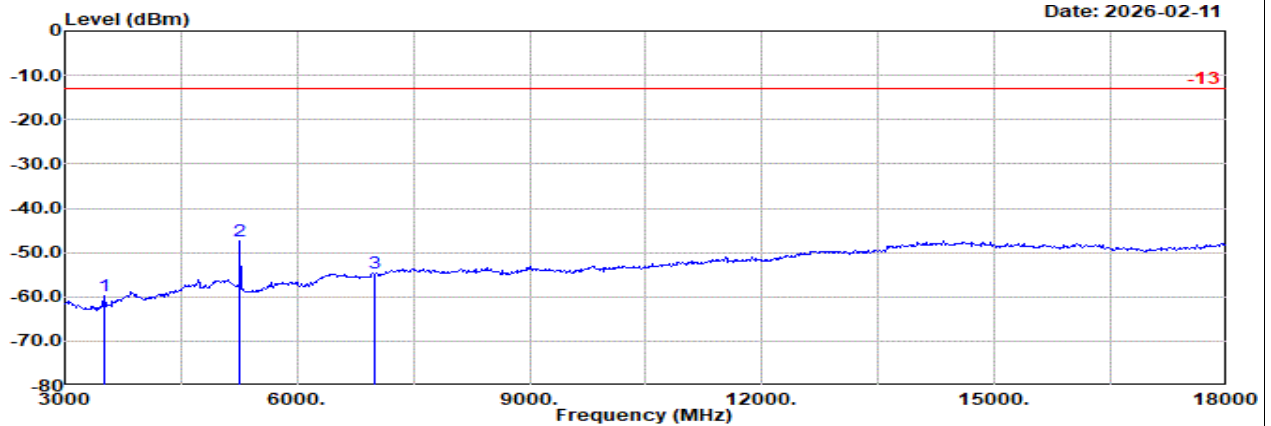


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 30M Ch353000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	3504.00	-59.64	RMS	28.73	-24.04	1.80	-95.23	29.10	-13.00	-46.64	Horizontal	
2	5255.00	-47.41	RMS	32.39	-21.73	1.90	-95.23	35.26	-13.00	-34.41	Horizontal	
3	7007.00	-54.73	RMS	36.19	-21.59	1.43	-95.23	24.47	-13.00	-41.73	Horizontal	

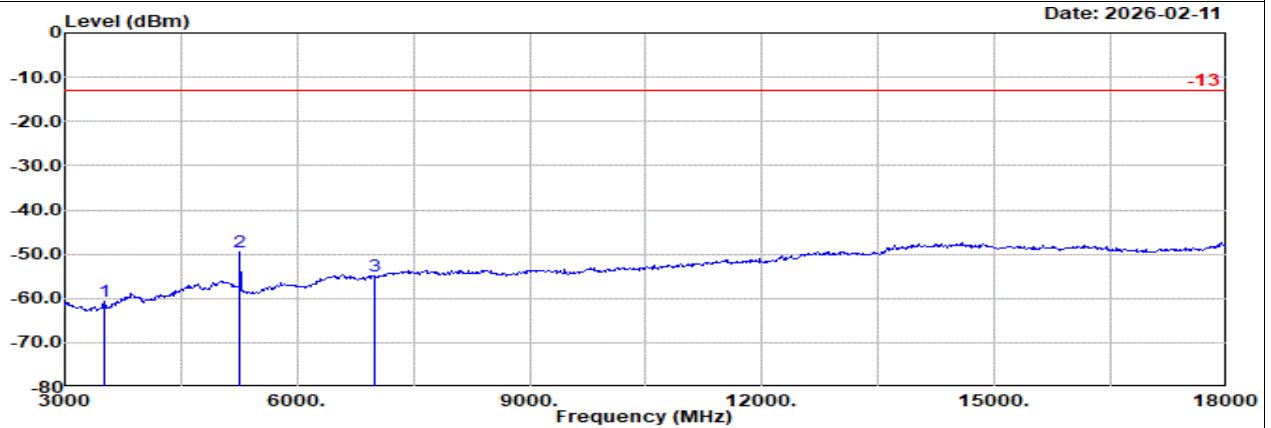

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 30M Ch353000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	3504.00	-60.60	RMS	28.73	-24.04	1.80	-95.23	28.14	-13.00	-47.60	Vertical	
2	5255.00	-49.45	RMS	32.39	-21.73	1.90	-95.23	33.22	-13.00	-36.45	Vertical	
3	7007.00	-55.04	RMS	36.19	-21.59	1.43	-95.23	24.16	-13.00	-42.04	Vertical	




Ant. 8+2

Part 27L Mode 2


EN-DC B5+n66 10M + 30M Ch20525 1RB0 QPSK + Ch345000 1RB1 BPSK

L

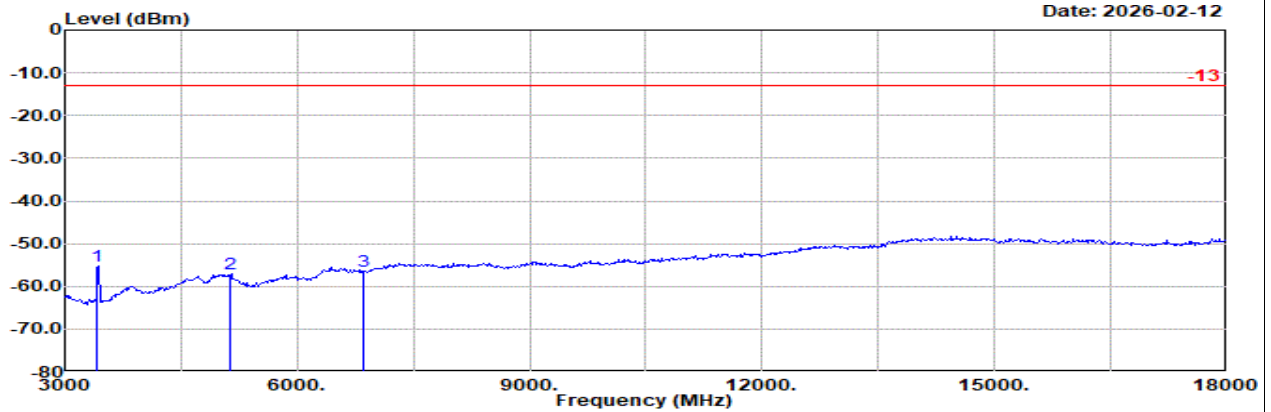

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 30M Ch345000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	3424.00	-55.31	RMS	28.35	-23.94	1.88	-95.23	33.63	-13.00	-42.31	Horizontal
2	5135.00	-57.03	RMS	32.50	-21.67	2.09	-95.23	25.28	-13.00	-44.03	Horizontal
3	6847.00	-56.39	RMS	35.99	-21.56	1.46	-95.23	22.95	-13.00	-43.39	Horizontal

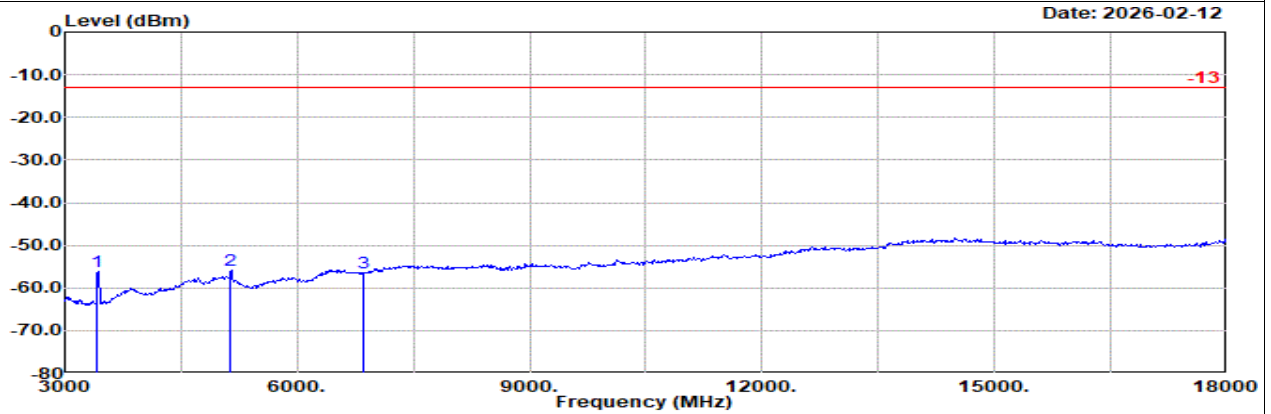

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 30M Ch345000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	3424.00	-56.02	RMS	28.35	-23.94	1.88	-95.23	32.92	-13.00	-43.02	Vertical
2	5135.00	-55.71	RMS	32.50	-21.67	2.09	-95.23	26.60	-13.00	-42.71	Vertical
3	6847.00	-56.34	RMS	35.99	-21.56	1.46	-95.23	23.00	-13.00	-43.34	Vertical




Ant. 8+2

Part 27L Mode 2


EN-DC B5+n66 10M + 30M Ch20525 1RB0 QPSK + Ch349000 1RB1 BPSK

M

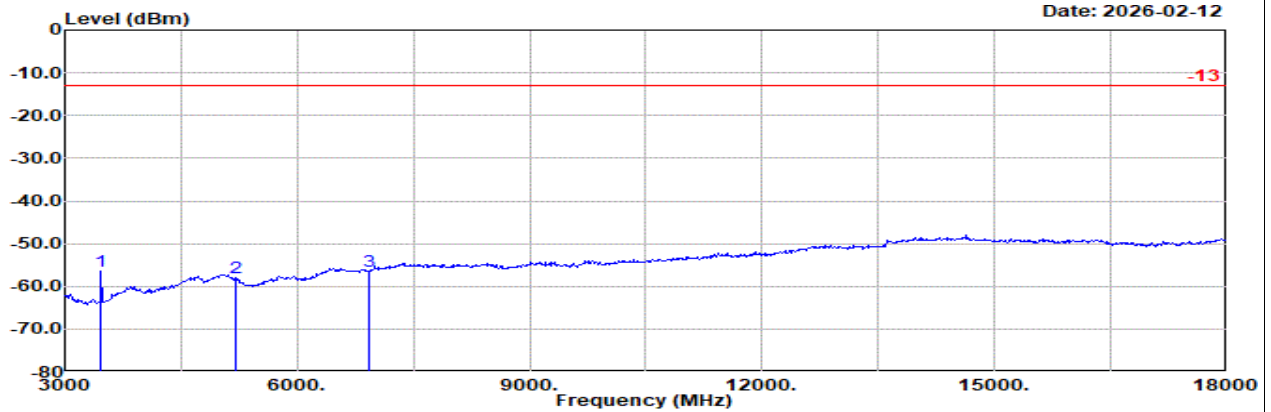

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 30M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3464.00	-56.34	RMS		28.48	-24.00	1.84	-95.23	32.57	-13.00	-43.34	Horizontal
2	5195.00	-58.06	RMS		32.50	-21.71	2.01	-95.23	24.37	-13.00	-45.06	Horizontal
3	6927.00	-56.44	RMS		36.05	-21.58	1.44	-95.23	22.88	-13.00	-43.44	Horizontal

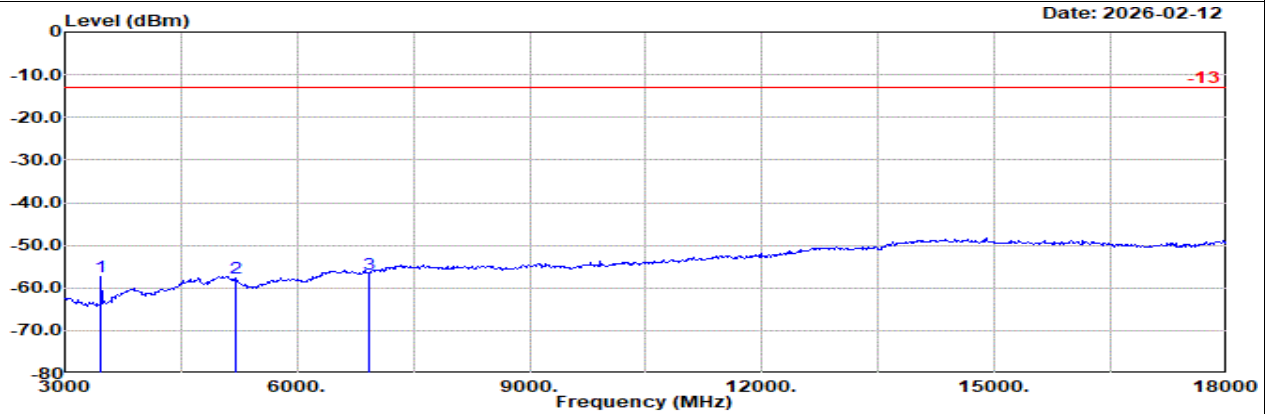

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 30M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3464.00	-57.33	RMS		28.48	-24.00	1.84	-95.23	31.58	-13.00	-44.33	Vertical
2	5195.00	-57.68	RMS		32.50	-21.71	2.01	-95.23	24.75	-13.00	-44.68	Vertical
3	6927.00	-56.61	RMS		36.05	-21.58	1.44	-95.23	22.71	-13.00	-43.61	Vertical




Ant. 8+2

Part 27L Mode 2

EN-DC B5+n66 10M + 30M Ch20525 1RB0 QPSK + Ch353000 1RB1 BPSK

H

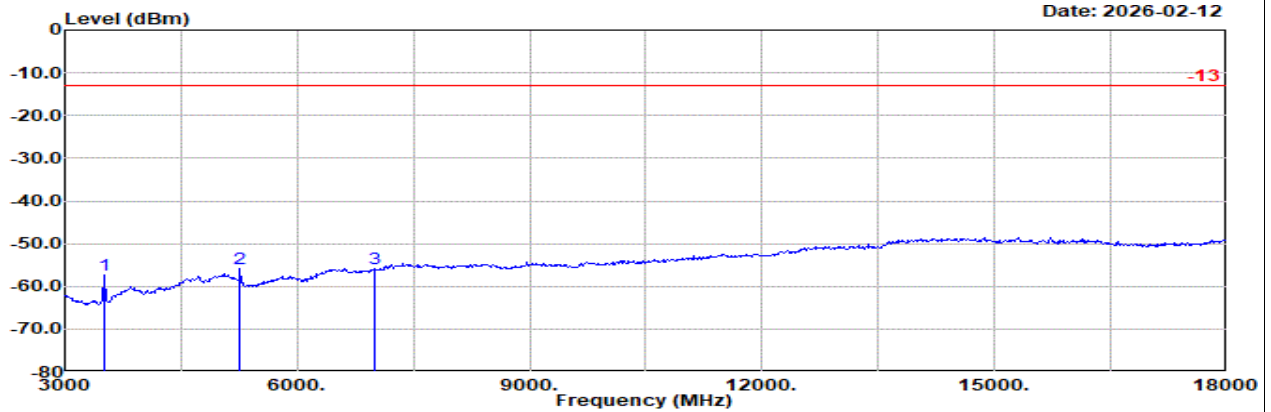


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 30M Ch353000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3504.00	-57.36	RMS	28.73	-24.04	1.80	-95.23	31.38	-13.00	-44.36	Horizontal
2	5255.00	-55.84	RMS	32.39	-21.73	1.90	-95.23	26.83	-13.00	-42.84	Horizontal
3	7007.00	-56.00	RMS	36.19	-21.59	1.43	-95.23	23.20	-13.00	-43.00	Horizontal

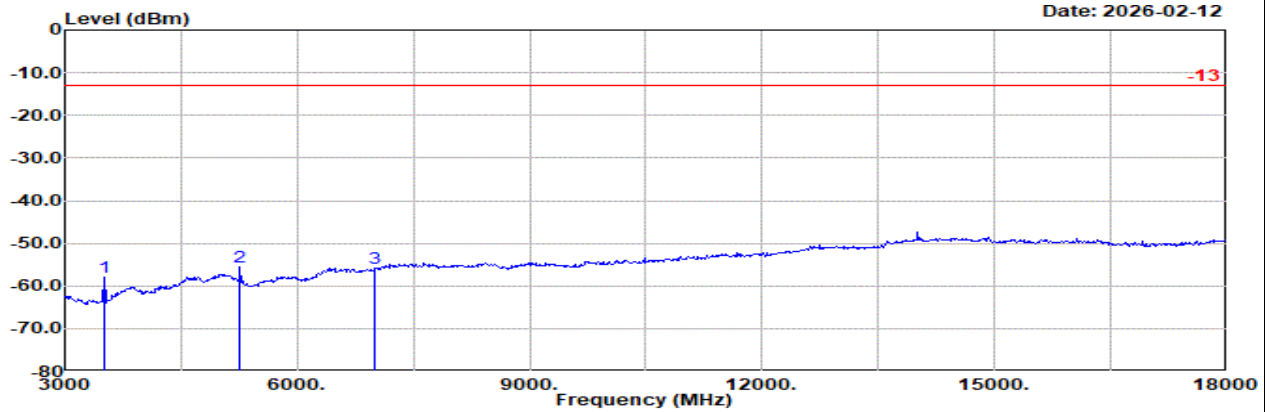

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 30M Ch353000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3504.00	-58.04	RMS	28.73	-24.04	1.80	-95.23	30.70	-13.00	-45.04	Vertical
2	5255.00	-55.46	RMS	32.39	-21.73	1.90	-95.23	27.21	-13.00	-42.46	Vertical
3	7007.00	-55.79	RMS	36.19	-21.59	1.43	-95.23	23.41	-13.00	-42.79	Vertical




Ant. 8

Part 27N Mode 3

NR SA n71 20M Ch134600 1RB1 BPSK

L

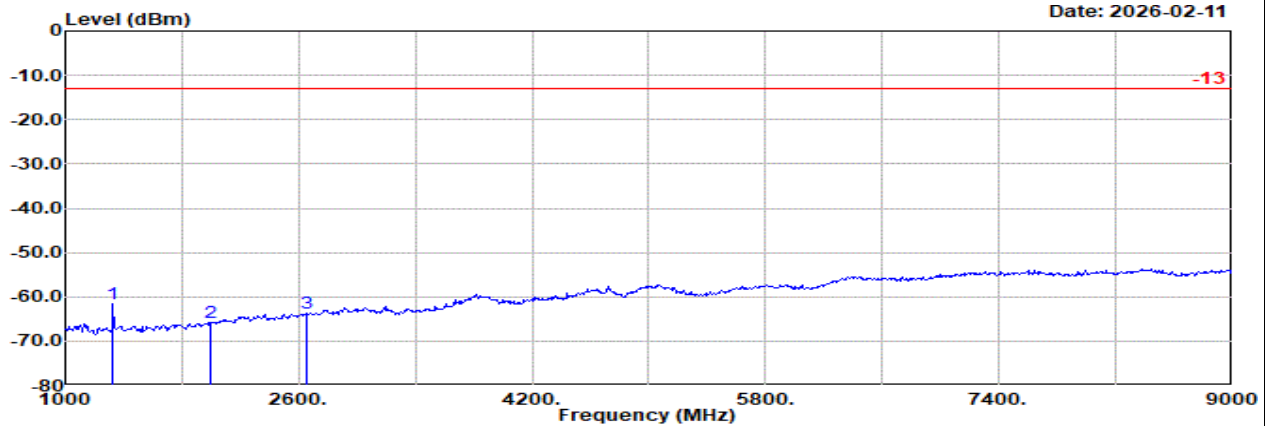


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 20M Ch134600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1329.00	-61.71	RMS		24.39	-25.66	1.07	-95.23	33.72	-13.00	-48.71		Horizontal
2	1993.00	-65.80	RMS		25.96	-24.85	0.80	-95.23	27.52	-13.00	-52.80		Horizontal
3	2657.00	-63.75	RMS		27.23	-23.99	0.94	-95.23	27.30	-13.00	-50.75		Horizontal

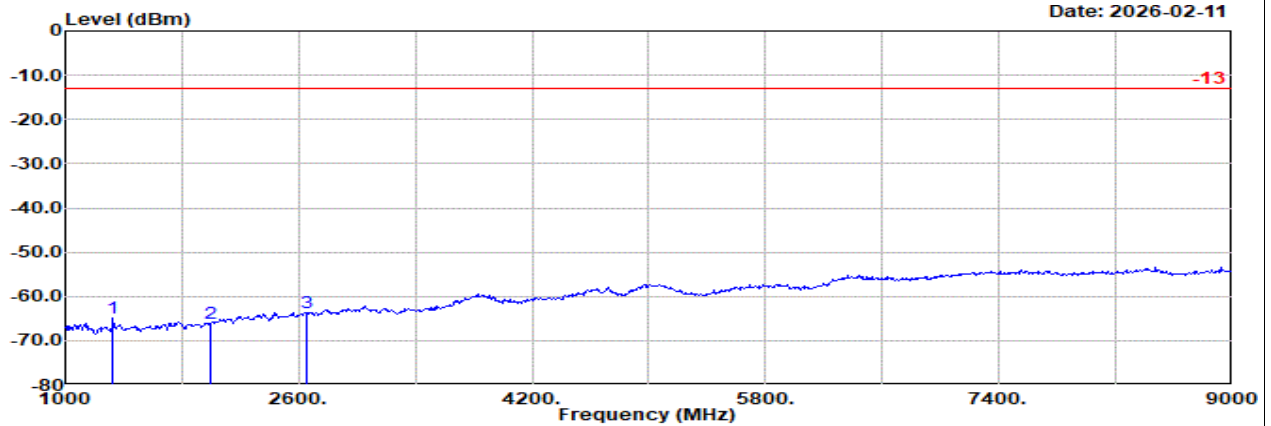

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 20M Ch134600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1329.00	-64.79	RMS		24.39	-25.66	1.07	-95.23	30.64	-13.00	-51.79		Vertical
2	1993.00	-66.02	RMS		25.96	-24.85	0.80	-95.23	27.30	-13.00	-53.02		Vertical
3	2657.00	-63.77	RMS		27.23	-23.99	0.94	-95.23	27.28	-13.00	-50.77		Vertical




Ant. 8

Part 27N Mode 3

NR SA n71 20M Ch136100 1RB1 BPSK

M

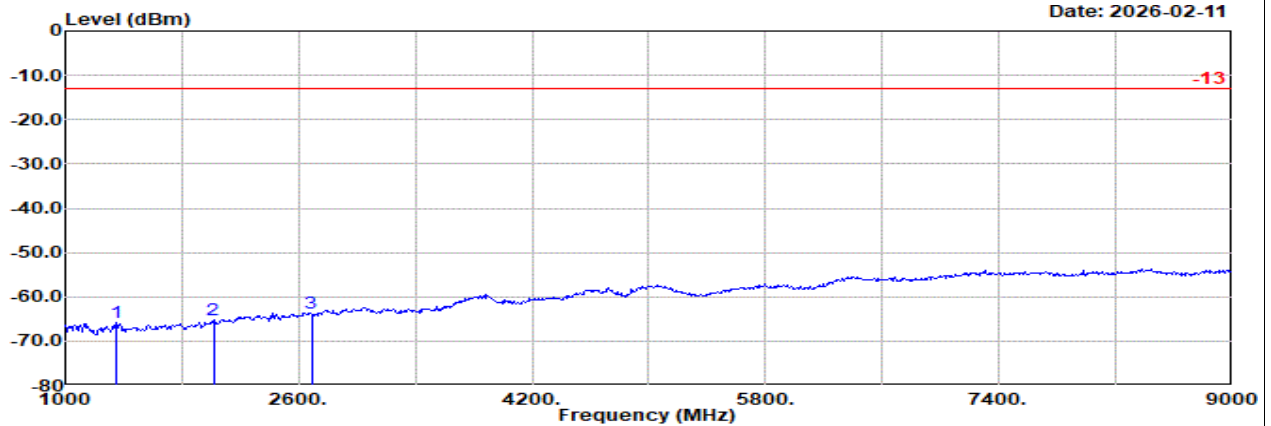


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 20M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1344.00	-65.68	RMS		24.34	-25.61	1.05	-95.23	29.77	-13.00	-52.68		Horizontal
2	2015.00	-65.35	RMS		26.20	-24.82	0.80	-95.23	27.70	-13.00	-52.35		Horizontal
3	2687.00	-63.65	RMS		27.40	-23.95	0.96	-95.23	27.17	-13.00	-50.65		Horizontal

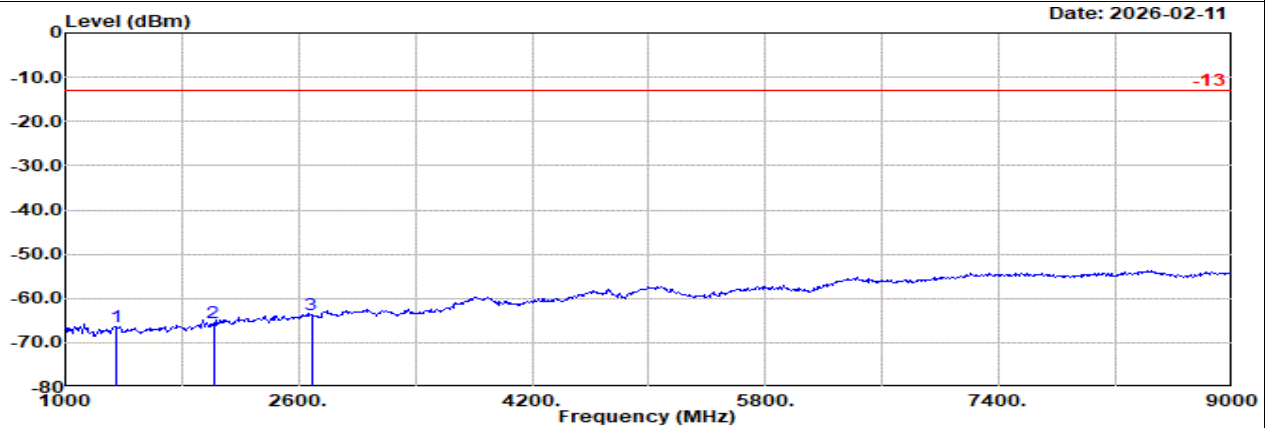

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 20M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1344.00	-66.35	RMS		24.34	-25.61	1.05	-95.23	29.10	-13.00	-53.35		Vertical
2	2015.00	-65.59	RMS		26.20	-24.82	0.80	-95.23	27.46	-13.00	-52.59		Vertical
3	2687.00	-63.72	RMS		27.40	-23.95	0.96	-95.23	27.10	-13.00	-50.72		Vertical




Ant. 8

Part 27N Mode 3

NR SA n71 20M Ch137600 1RB1 BPSK

H

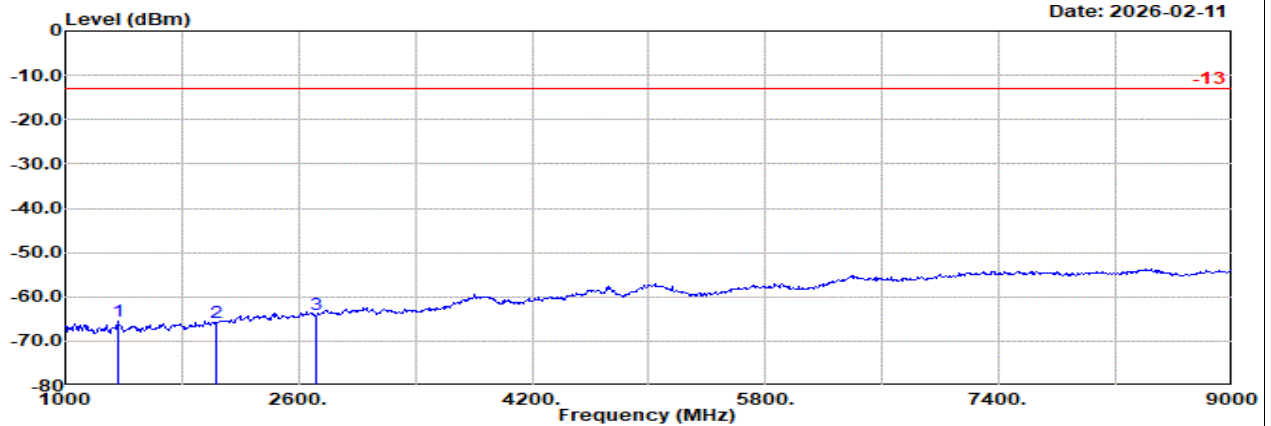


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 20M Ch137600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB		
1	1359.00	-65.65	RMS	24.49	-25.57	1.03	-95.23	29.63	-13.00	-52.65			Horizontal
2	2038.00	-65.66	RMS	26.12	-24.79	0.81	-95.23	27.43	-13.00	-52.66			Horizontal
3	2717.00	-64.03	RMS	27.50	-23.92	0.98	-95.23	26.64	-13.00	-51.03			Horizontal

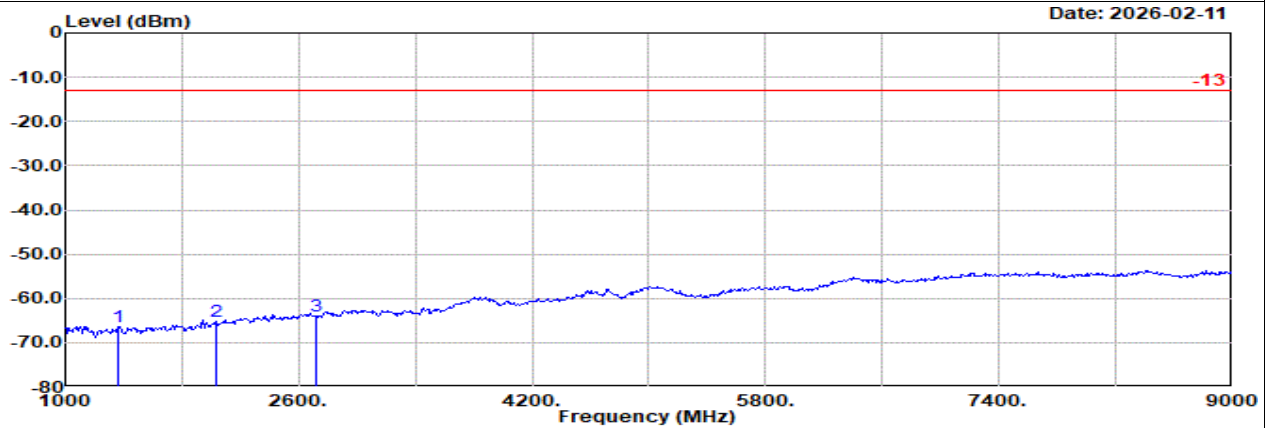

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 20M Ch137600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB		
1	1359.00	-66.50	RMS	24.49	-25.57	1.03	-95.23	28.78	-13.00	-53.50			Vertical
2	2038.00	-65.23	RMS	26.12	-24.79	0.81	-95.23	27.86	-13.00	-52.23			Vertical
3	2717.00	-63.97	RMS	27.50	-23.92	0.98	-95.23	26.70	-13.00	-50.97			Vertical




Ant. 1

Part 27M Mode 4

NR SA n7 25M Ch502500 1RB1 BPSK

L

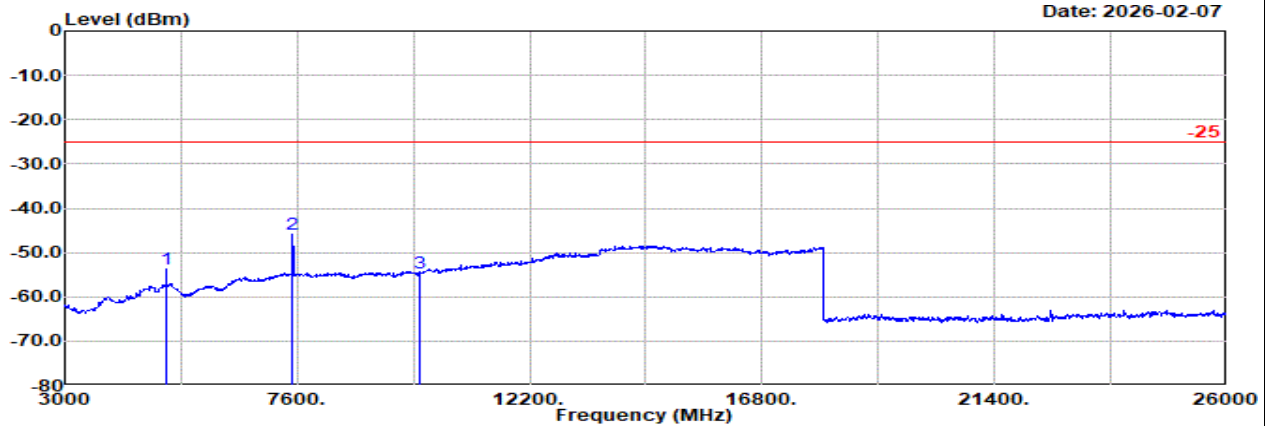


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n7 25M Ch502500 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1	dB		dB	g		
1	5003.00	-53.62	RMS	32.79	-21.58	2.27	-95.23	28.13	-25.00	-28.62	Horizontal
2	7505.00	-46.01	RMS	36.69	-21.16	1.54	-95.23	32.15	-25.00	-21.01	Horizontal
3	10006.00	-54.65	RMS	37.10	-21.54	1.65	-95.23	23.37	-25.00	-29.65	Horizontal

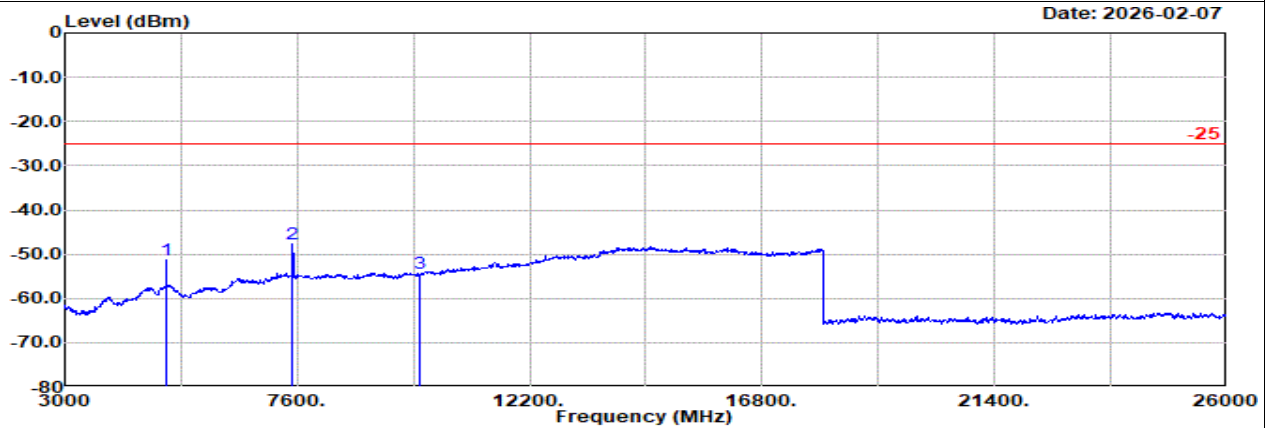

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n7 25M Ch502500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5003.00	-51.30	RMS	32.79	-21.58	2.27	-95.23	30.45	-25.00	-26.30	Vertical
2	7505.00	-47.77	RMS	36.69	-21.16	1.54	-95.23	30.39	-25.00	-22.77	Vertical
3	10006.00	-54.22	RMS	37.10	-21.54	1.65	-95.23	23.80	-25.00	-29.22	Vertical




Ant. 1

Part 27M Mode 4

NR SA n7 25M Ch507000 1RB1 BPSK

M

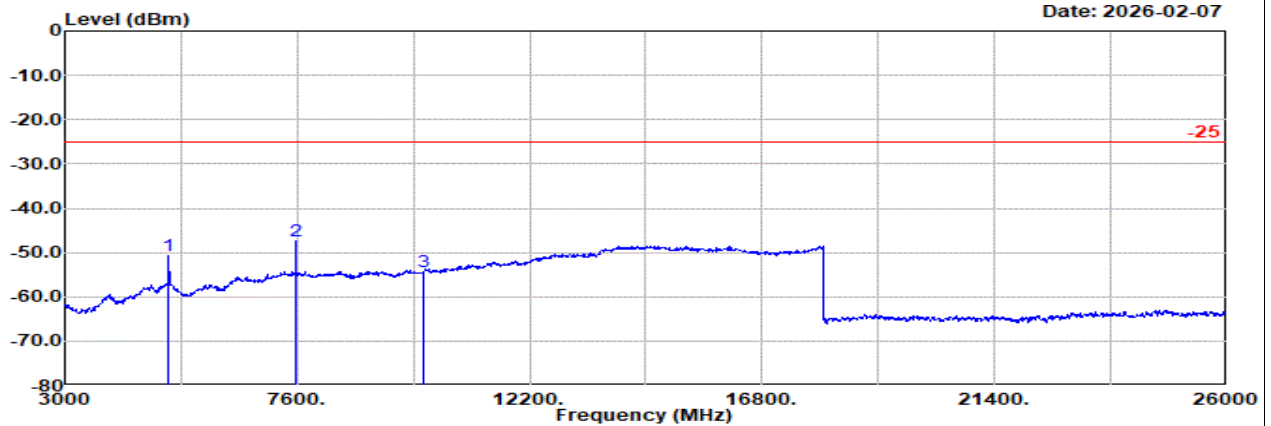


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n7 25M Ch507000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	5048.00	-50.65	RMS	32.70	-21.61	2.21	-95.23	31.28	-25.00	-25.65	Horizontal	
2	7572.00	-47.33	RMS	36.60	-21.20	1.60	-95.23	30.90	-25.00	-22.33	Horizontal	
3	10096.00	-54.21	RMS	37.10	-21.60	1.67	-95.23	23.85	-25.00	-29.21	Horizontal	

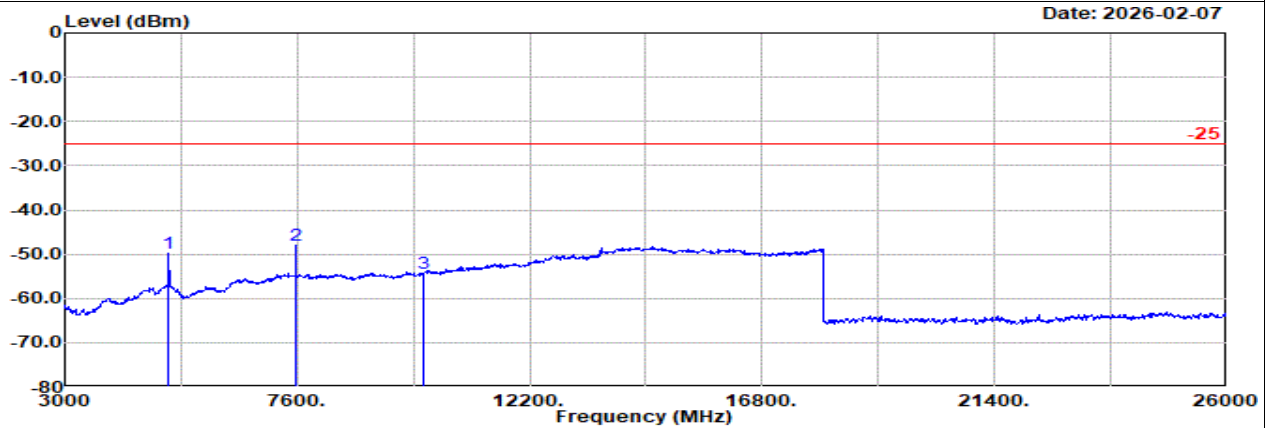

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n7 25M Ch507000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	5048.00	-49.93	RMS	32.70	-21.61	2.21	-95.23	32.00	-25.00	-24.93	Vertical	
2	7572.00	-48.06	RMS	36.60	-21.20	1.60	-95.23	30.17	-25.00	-23.06	Vertical	
3	10096.00	-54.41	RMS	37.10	-21.60	1.67	-95.23	23.65	-25.00	-29.41	Vertical	




Ant. 1

Part 27M Mode 4

NR SA n7 25M Ch511500 1RB1 BPSK

H

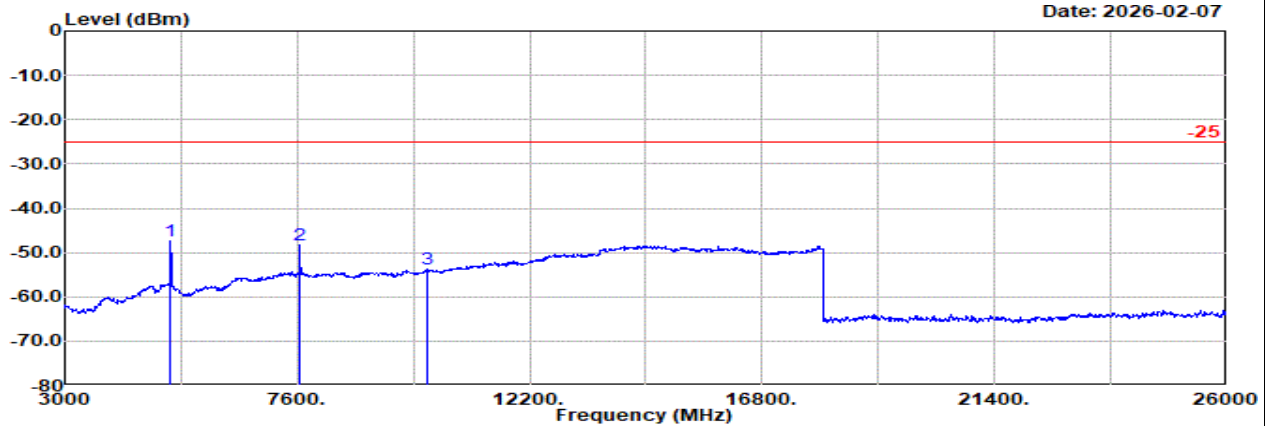


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n7 25M Ch511500 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1	dB		dB	g		
1	5093.00	-47.54	RMS	32.53	-21.64	2.14	-95.23	34.66	-25.00	-22.54	Horizontal
2	7640.00	-48.33	RMS	36.60	-21.26	1.61	-95.23	29.95	-25.00	-23.33	Horizontal
3	10186.00	-53.83	RMS	37.27	-21.65	1.68	-95.23	24.10	-25.00	-28.83	Horizontal

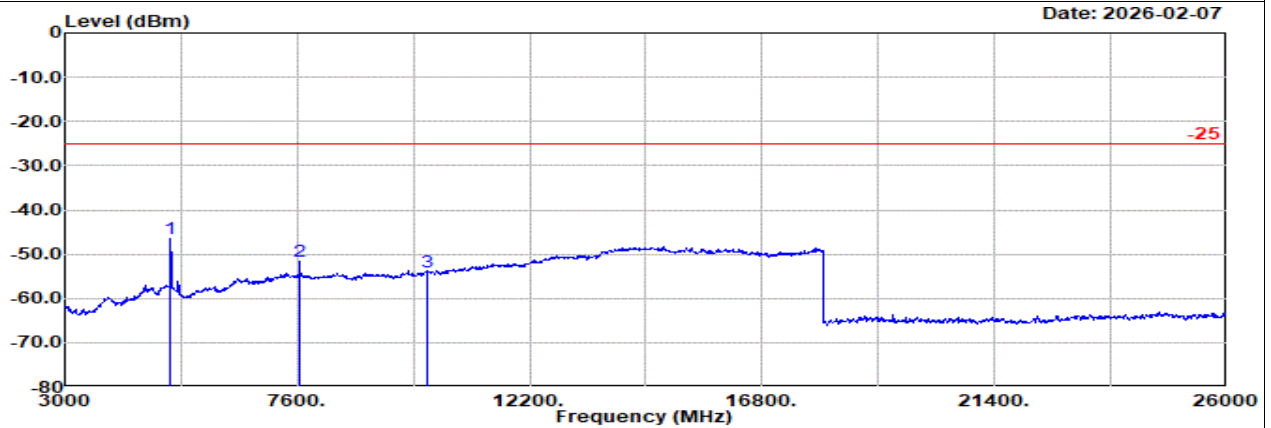

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n7 25M Ch511500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5093.00	-46.36	RMS	32.53	-21.64	2.14	-95.23	35.84	-25.00	-21.36	Vertical
2	7640.00	-51.52	RMS	36.60	-21.26	1.61	-95.23	26.76	-25.00	-26.52	Vertical
3	10186.00	-54.00	RMS	37.27	-21.65	1.68	-95.23	23.93	-25.00	-29.00	Vertical




Ant. 1

Part 27M Mode 5

NR SA n38 40M Ch518000 1RB1 BPSK

L

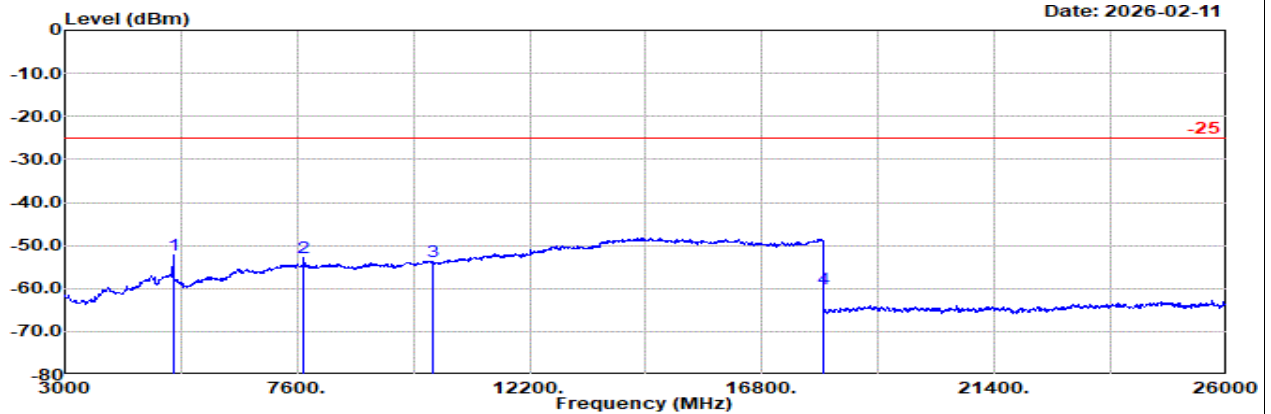


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n38 40M Ch518000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5145.00	-52.24	RMS	32.50	-21.68	2.07	-95.23	30.10	-25.00	-27.24	Horizontal
2	7717.00	-52.92	RMS	36.53	-21.34	1.58	-95.23	25.54	-25.00	-27.92	Horizontal
3	10289.00	-53.88	RMS	37.28	-21.71	1.70	-95.23	24.08	-25.00	-28.88	Horizontal
4	18008.00	-60.21	RMS	37.70	-39.71	-9.54	-95.23	46.57	-25.00	-35.21	Horizontal

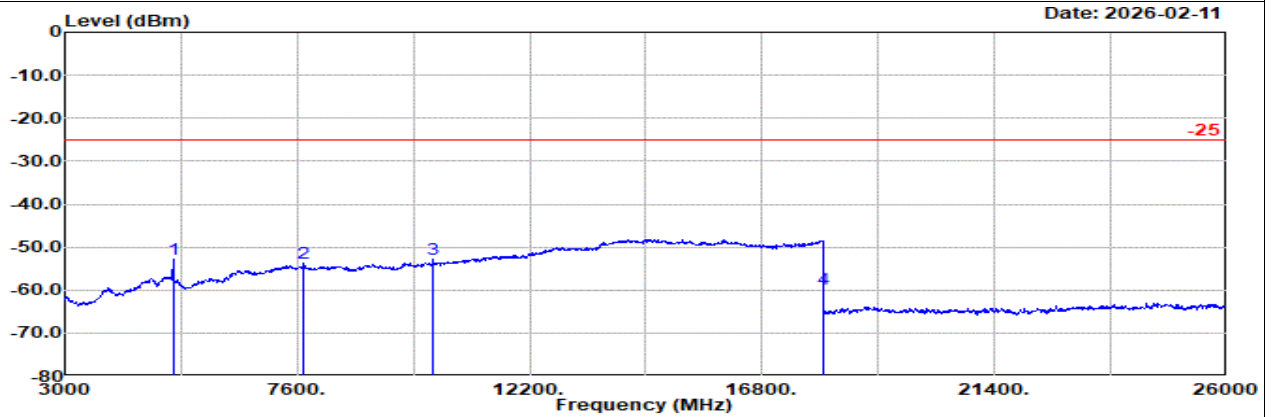

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n38 40M Ch518000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5145.00	-52.69	RMS	32.50	-21.68	2.07	-95.23	29.65	-25.00	-27.69	Vertical
2	7717.00	-53.64	RMS	36.53	-21.34	1.58	-95.23	24.82	-25.00	-28.64	Vertical
3	10289.00	-52.69	RMS	37.28	-21.71	1.70	-95.23	25.27	-25.00	-27.69	Vertical
4	18008.00	-59.73	RMS	37.70	-39.71	-9.54	-95.23	47.05	-25.00	-34.73	Vertical




Ant. 1

Part 27M Mode 5

NR SA n38 40M Ch519000 1RB1 BPSK

M

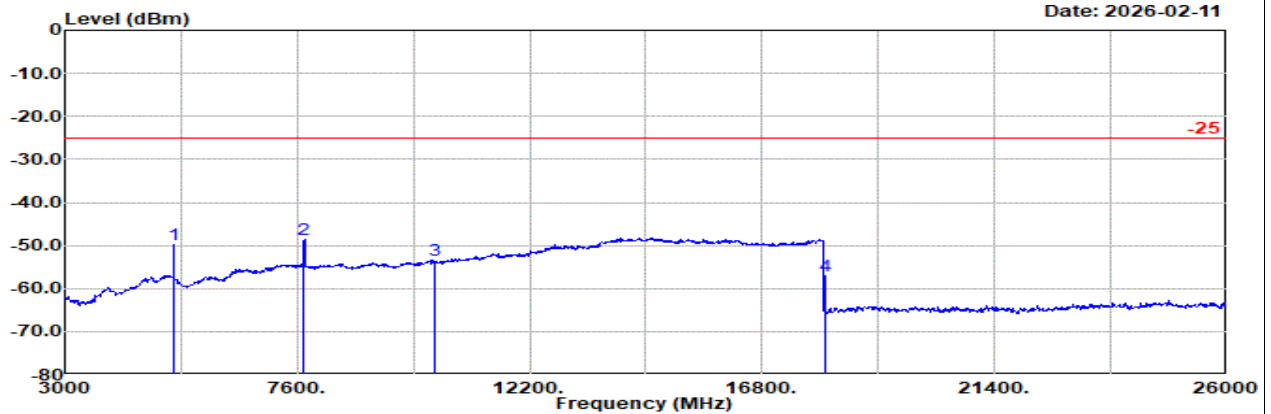


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n38 40M Ch519000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5155.00	-49.90	RMS	32.50	-21.69	2.06	-95.23	32.46	-25.00	-24.90	Horizontal
2	7732.00	-48.73	RMS	36.56	-21.36	1.57	-95.23	29.73	-25.00	-23.73	Horizontal
3	10309.00	-53.57	RMS	37.32	-21.72	1.71	-95.23	24.35	-25.00	-28.57	Horizontal
4	18040.00	-56.95	RMS	37.70	-39.67	-9.54	-95.23	49.79	-25.00	-31.95	Horizontal

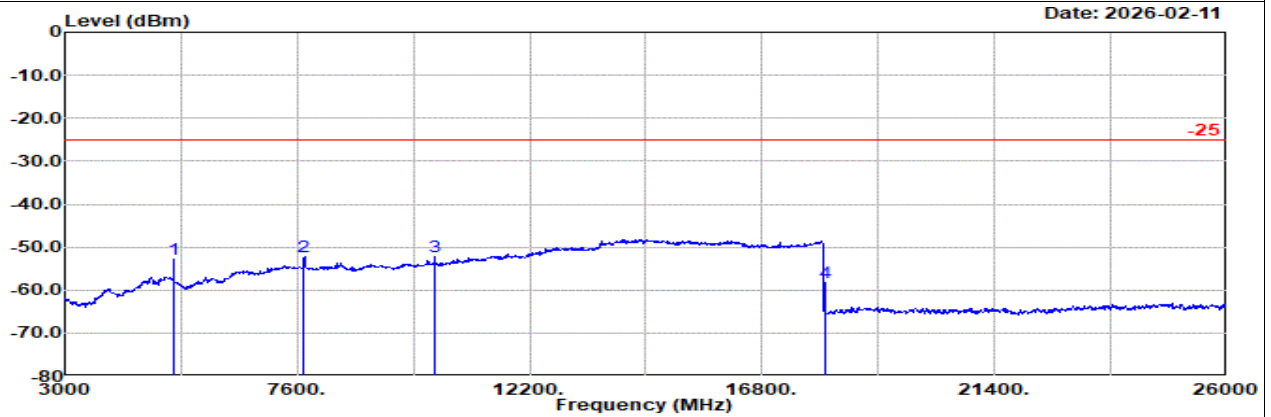

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n38 40M Ch519000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5155.00	-52.82	RMS	32.50	-21.69	2.06	-95.23	29.54	-25.00	-27.82	Vertical
2	7732.00	-52.11	RMS	36.56	-21.36	1.57	-95.23	26.35	-25.00	-27.11	Vertical
3	10309.00	-52.21	RMS	37.32	-21.72	1.71	-95.23	25.71	-25.00	-27.21	Vertical
4	18040.00	-58.33	RMS	37.70	-39.67	-9.54	-95.23	48.41	-25.00	-33.33	Vertical




Ant. 1

Part 27M Mode 5

NR SA n38 40M Ch520000 1RB1 BPSK

H

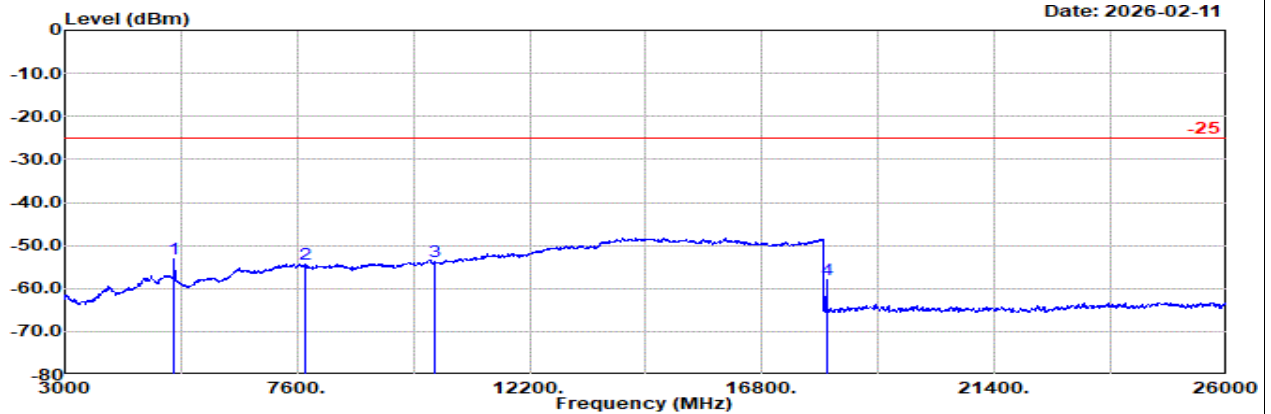


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n38 40M Ch520000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5165.00	-52.99	RMS	32.50	-21.69	2.05	-95.23	29.38	-25.00	-27.99	Horizontal
2	7747.00	-54.38	RMS	36.59	-21.37	1.56	-95.23	24.07	-25.00	-29.38	Horizontal
3	10329.00	-53.62	RMS	37.36	-21.73	1.71	-95.23	24.27	-25.00	-28.62	Horizontal
4	18072.00	-57.85	RMS	37.70	-39.62	-9.54	-95.23	48.84	-25.00	-32.85	Horizontal

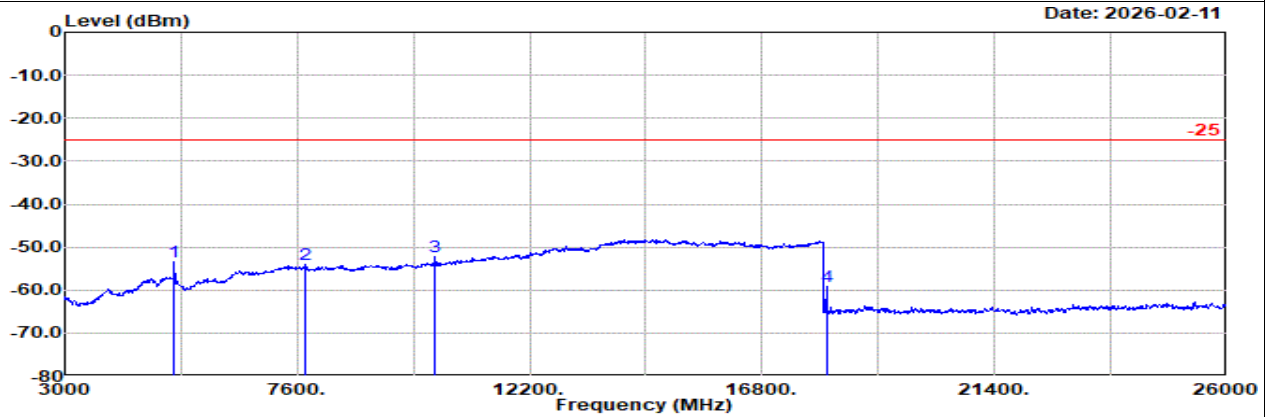

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n38 40M Ch520000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5165.00	-53.44	RMS	32.50	-21.69	2.05	-95.23	28.93	-25.00	-28.44	Vertical
2	7747.00	-54.05	RMS	36.59	-21.37	1.56	-95.23	24.40	-25.00	-29.05	Vertical
3	10329.00	-52.19	RMS	37.36	-21.73	1.71	-95.23	25.70	-25.00	-27.19	Vertical
4	18072.00	-59.18	RMS	37.70	-39.62	-9.54	-95.23	47.51	-25.00	-34.18	Vertical




Ant. 1

Part 27M Mode 6


NR SA n41 HPUE 40M Ch503202 1RB1 BPSK

L

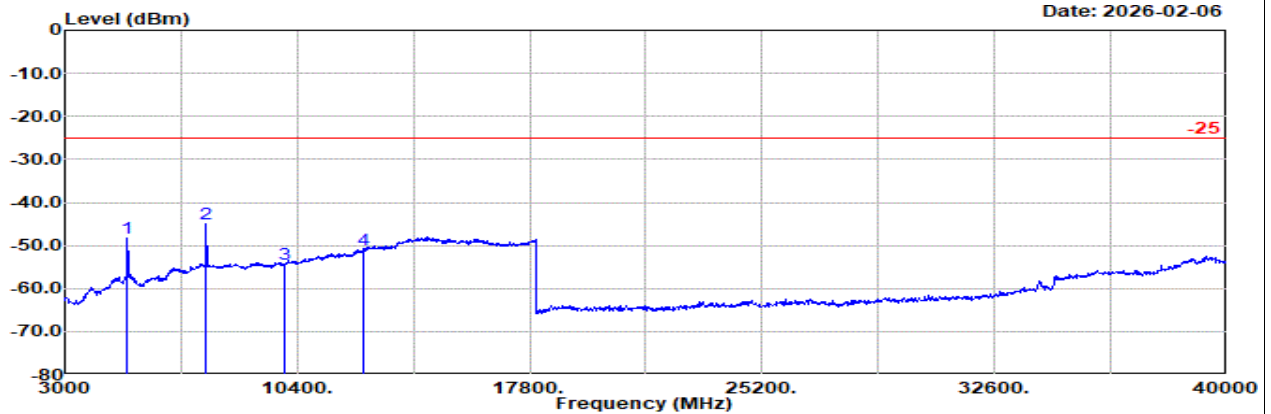

Site : 03CH21-HY
Condition: -25 1m BBHA9170_1223_250702 Horizontal
: SA n41 40M Ch503202 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	4997.00	-48.23	RMS	32.79	-21.59	2.27	-95.23	33.53	-25.00	-23.23	Horizontal
2	7495.00	-44.92	RMS	36.71	-21.16	1.53	-95.23	33.23	-25.00	-19.92	Horizontal
3	9993.00	-54.31	RMS	37.09	-21.55	1.65	-95.23	23.73	-25.00	-29.31	Horizontal
4	12491.00	-50.91	RMS	39.25	-21.35	2.12	-95.23	24.30	-25.00	-25.91	Horizontal

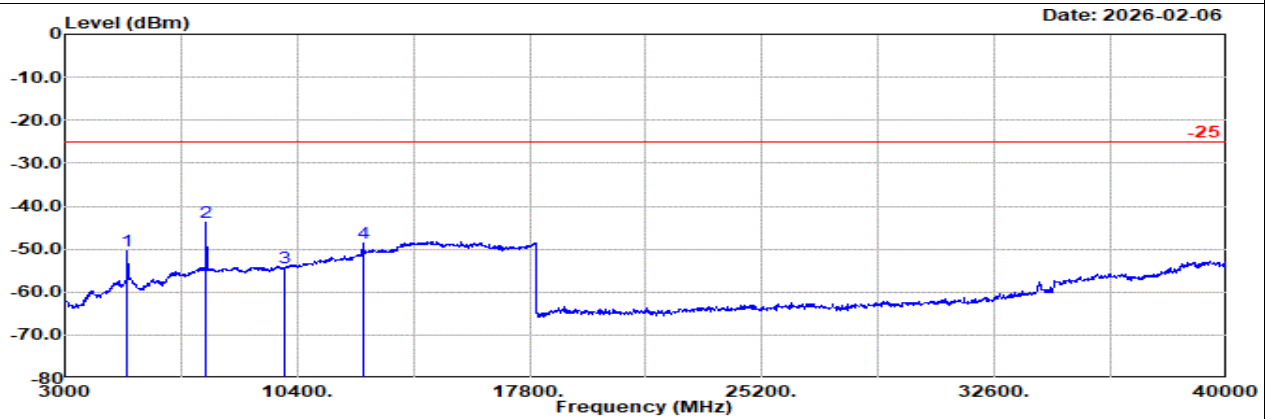

Site : 03CH21-HY
Condition: -25 1m BBHA9170_1223_250702 Vertical
: SA n41 40M Ch503202 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	4997.00	-50.42	RMS	32.79	-21.59	2.27	-95.23	31.34	-25.00	-25.42	Vertical
2	7495.00	-43.70	RMS	36.71	-21.16	1.53	-95.23	34.45	-25.00	-18.70	Vertical
3	9993.00	-54.30	RMS	37.09	-21.55	1.65	-95.23	23.74	-25.00	-29.30	Vertical
4	12491.00	-48.54	RMS	39.25	-21.35	2.12	-95.23	26.67	-25.00	-23.54	Vertical




Ant. 1

Part 27M Mode 6

NR SA n41 HPUE 40M Ch518598 1RB1 BPSK

M

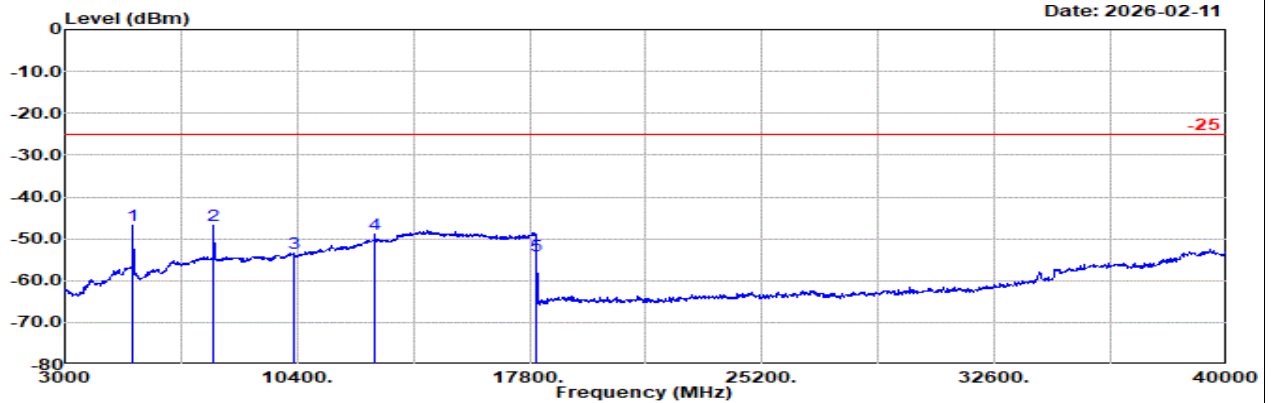


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n41 40M Ch518598 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	5151.00	-46.68	RMS	32.50	-21.68	2.07	-95.23	35.66	-25.00	-21.68	Horizontal	
2	7726.00	-46.81	RMS	36.55	-21.35	1.57	-95.23	31.65	-25.00	-21.81	Horizontal	
3	10301.00	-53.33	RMS	37.30	-21.71	1.70	-95.23	24.61	-25.00	-28.33	Horizontal	
4	12876.00	-48.96	RMS	39.95	-21.30	2.21	-95.23	25.41	-25.00	-23.96	Horizontal	
5	18022.00	-54.18	RMS	37.70	-39.69	-9.54	-95.23	52.58	-25.00	-29.18	Horizontal	

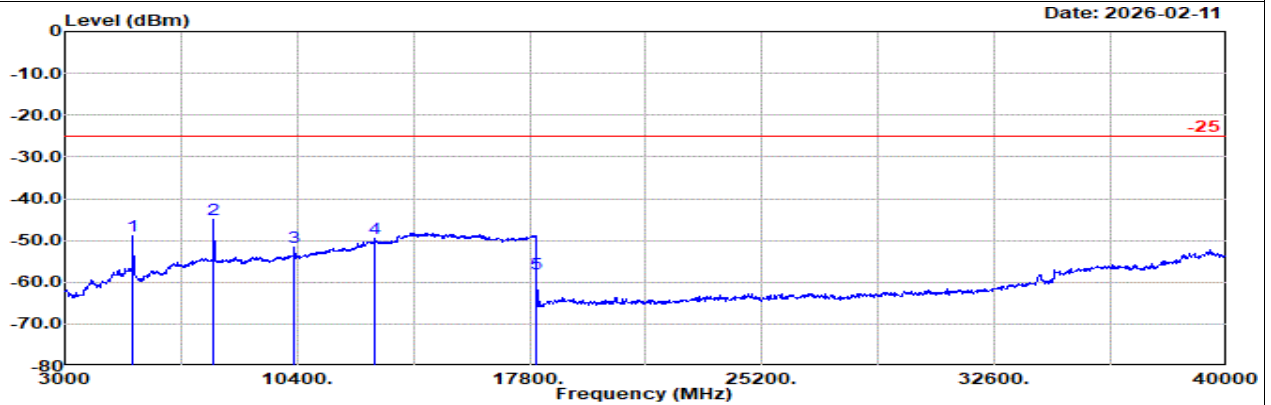

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n41 40M Ch518598 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	5151.00	-48.90	RMS	32.50	-21.68	2.07	-95.23	33.44	-25.00	-23.90	Vertical	
2	7726.00	-44.89	RMS	36.55	-21.35	1.57	-95.23	33.57	-25.00	-19.89	Vertical	
3	10301.00	-51.75	RMS	37.30	-21.71	1.70	-95.23	26.19	-25.00	-26.75	Vertical	
4	12876.00	-49.48	RMS	39.95	-21.30	2.21	-95.23	24.89	-25.00	-24.48	Vertical	
5	18022.00	-58.00	RMS	37.70	-39.69	-9.54	-95.23	48.76	-25.00	-33.00	Vertical	




Ant. 1

Part 27M Mode 6

NR SA n41 HPUE 40M Ch534000 1RB1 BPSK

H

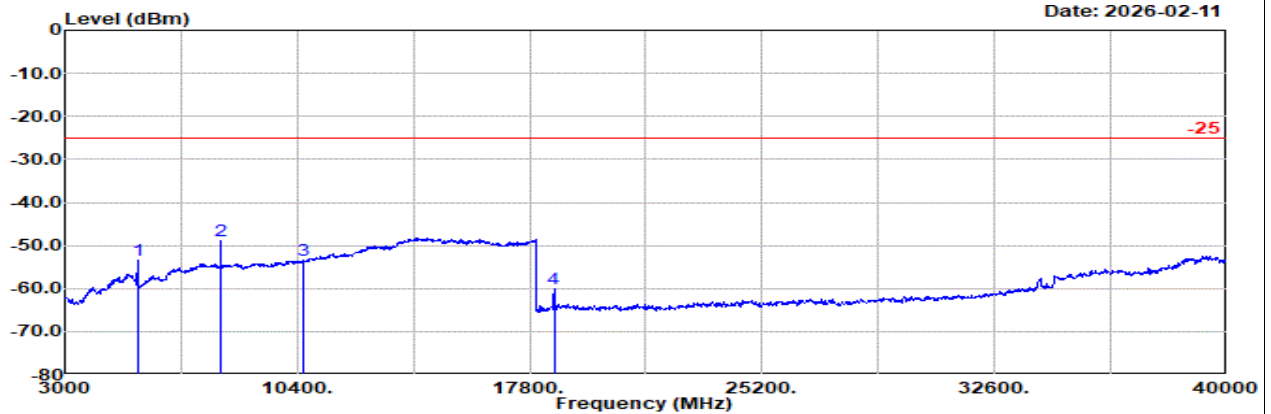


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: SA n41 40M Ch534000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5305.00	-53.47	RMS	32.30	-21.75	1.80	-95.23	29.41	-25.00	-28.47	Horizontal
2	7957.00	-49.05	RMS	36.50	-21.55	1.49	-95.23	29.74	-25.00	-24.05	Horizontal
3	10609.00	-53.57	RMS	37.50	-21.80	1.76	-95.23	24.20	-25.00	-28.57	Horizontal
4	18572.00	-60.15	RMS	38.14	-38.99	-9.54	-95.23	45.47	-25.00	-35.15	Horizontal

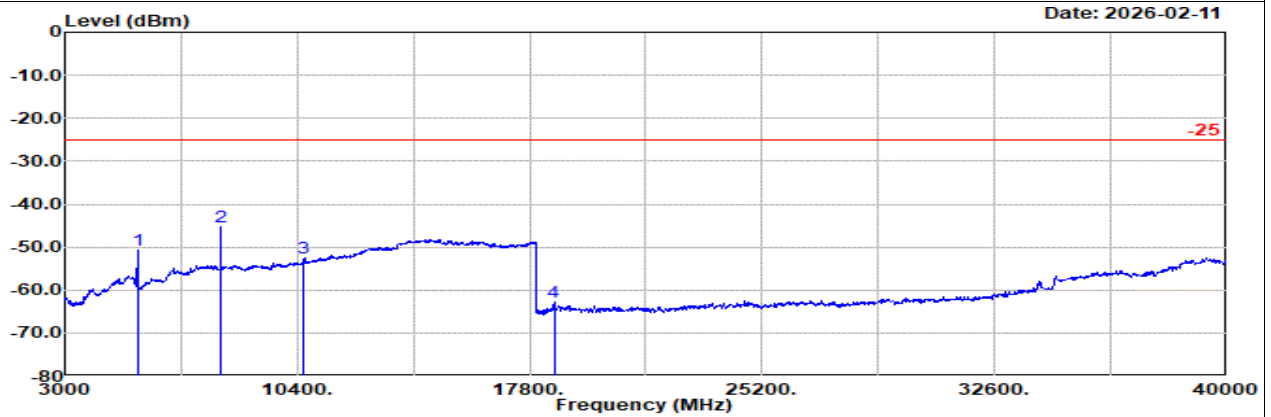

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: SA n41 40M Ch534000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	5305.00	-50.76	RMS	32.30	-21.75	1.80	-95.23	32.12	-25.00	-25.76	Vertical
2	7957.00	-45.23	RMS	36.50	-21.55	1.49	-95.23	33.56	-25.00	-20.23	Vertical
3	10609.00	-52.62	RMS	37.50	-21.80	1.76	-95.23	25.15	-25.00	-27.62	Vertical
4	18572.00	-62.68	RMS	38.14	-38.99	-9.54	-95.23	42.94	-25.00	-37.68	Vertical




Ant. 8+1

Part 27M Mode 7


EN-DC B5+n7 10M + 25M Ch20525 1RB0 QPSK + Ch502500 1RB1 BPSK

L

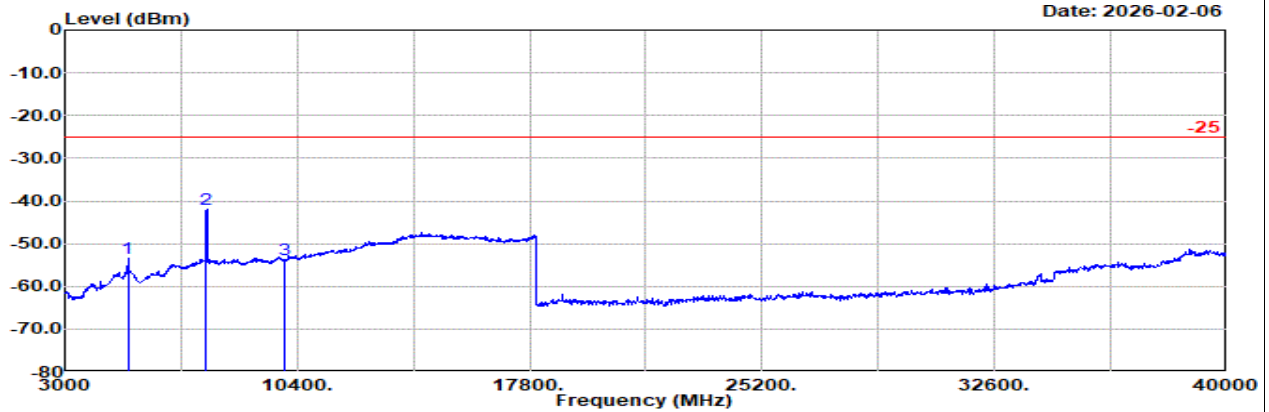

Site : 03CH21-HY
Condition: -25 1m BBHA9170_1223_250702 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 25M Ch502500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5003.00	-53.29	RMS	32.79	-21.58	2.27	-95.23	28.46	-25.00	-28.29	Horizontal
2	7505.00	-42.10	RMS	36.69	-21.16	1.54	-95.23	36.06	-25.00	-17.10	Horizontal
3	10006.00	-53.67	RMS	37.10	-21.54	1.65	-95.23	24.35	-25.00	-28.67	Horizontal

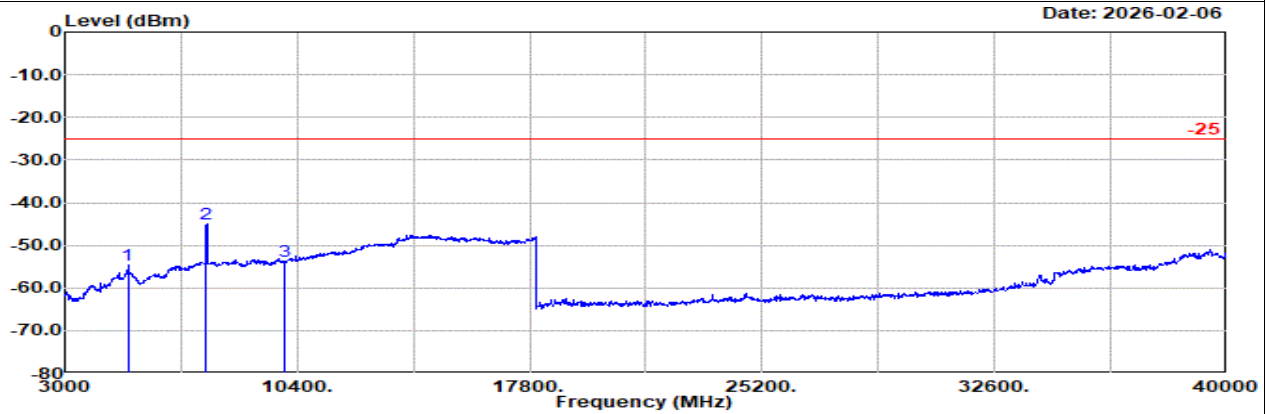

Site : 03CH21-HY
Condition: -25 1m BBHA9170_1223_250702 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 25M Ch502500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5003.00	-54.67	RMS	32.79	-21.58	2.27	-95.23	27.08	-25.00	-29.67	Vertical
2	7505.00	-45.06	RMS	36.69	-21.16	1.54	-95.23	33.10	-25.00	-20.06	Vertical
3	10006.00	-53.80	RMS	37.10	-21.54	1.65	-95.23	24.22	-25.00	-28.80	Vertical




Ant. 8+1

Part 27M Mode 7

EN-DC B5+n7 10M + 25M Ch20525 1RB0 QPSK + Ch507000 1RB1 BPSK

M

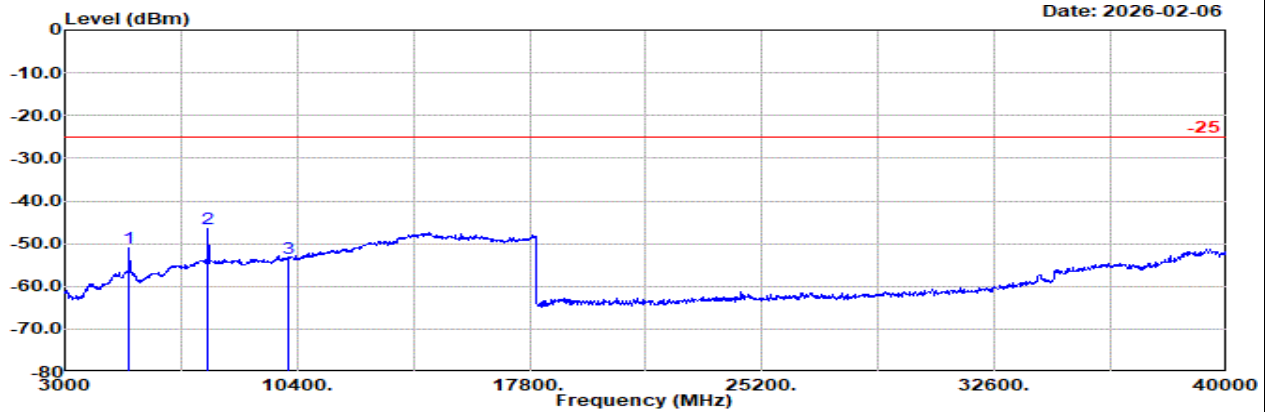


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 25M Ch507000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1	dB		dB	dBuV		
1	5048.00	-50.88	RMS	32.70	-21.61	2.21	-95.23	31.05	-25.00	-25.88	Horizontal
2	7572.00	-46.47	RMS	36.60	-21.20	1.60	-95.23	31.76	-25.00	-21.47	Horizontal
3	10096.00	-53.41	RMS	37.10	-21.60	1.67	-95.23	24.65	-25.00	-28.41	Horizontal

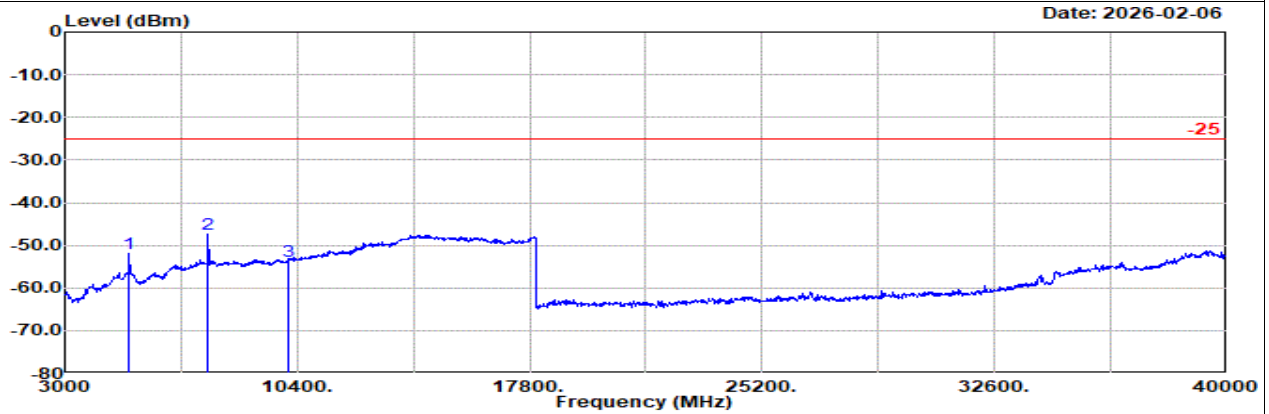

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 25M Ch507000 1RB1 BPSK


	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5048.00	-52.02	RMS	32.70	-21.61	2.21	-95.23	29.91	-25.00	-27.02	Vertical
2	7572.00	-47.41	RMS	36.60	-21.20	1.60	-95.23	30.82	-25.00	-22.41	Vertical
3	10096.00	-53.76	RMS	37.10	-21.60	1.67	-95.23	24.30	-25.00	-28.76	Vertical

Ant. 8+1

Part 27M Mode 7

EN-DC B5+n7 10M + 25M Ch20525 1RB0 QPSK + Ch511500 1RB1 BPSK

H

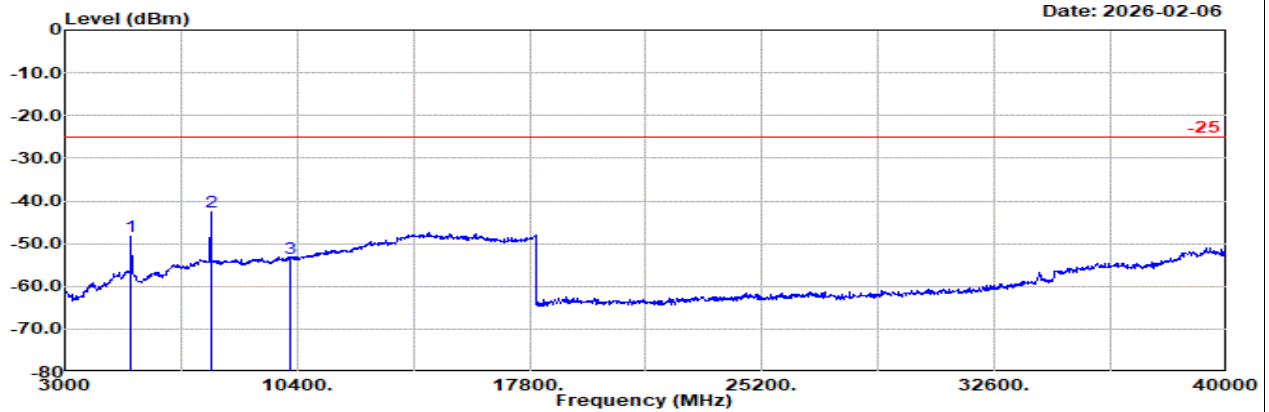


Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Horizontal

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 25M Ch511500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5093.00	-48.32	RMS	32.53	-21.64	2.14	-95.23	33.88	-25.00	-23.32	Horizontal
2	7640.00	-42.68	RMS	36.60	-21.26	1.61	-95.23	35.60	-25.00	-17.68	Horizontal
3	10186.00	-53.36	RMS	37.27	-21.65	1.68	-95.23	24.57	-25.00	-28.36	Horizontal

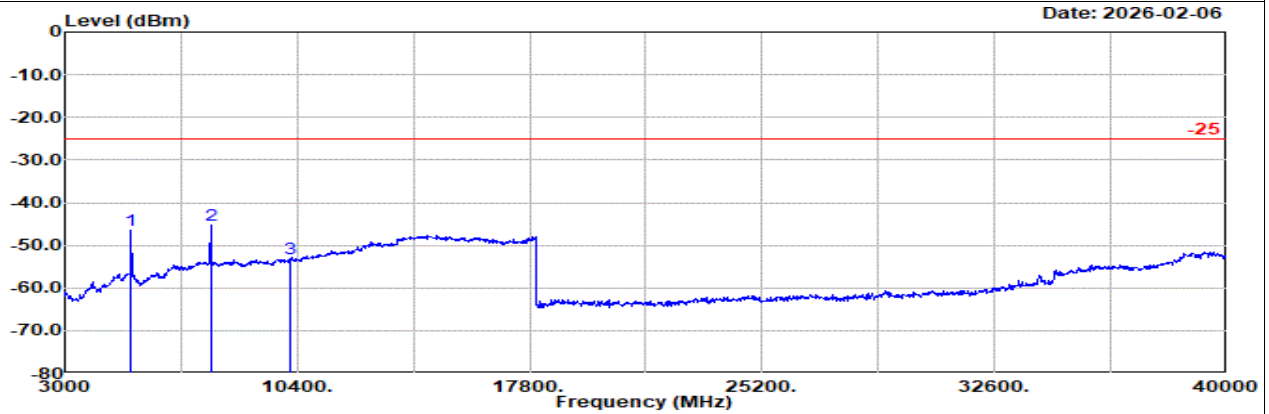

Site : 03CH21-HY

Condition: -25 1m BBHA9170_1223_250702 Vertical

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 25M Ch511500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5093.00	-46.50	RMS	32.53	-21.64	2.14	-95.23	35.70	-25.00	-21.50	Vertical
2	7640.00	-45.13	RMS	36.60	-21.26	1.61	-95.23	33.15	-25.00	-20.13	Vertical
3	10186.00	-53.27	RMS	37.27	-21.65	1.68	-95.23	24.66	-25.00	-28.27	Vertical




Ant. 9

Part 270 Mode 8

NR SA n77 60M Ch648668 1RB1 BPSK

L

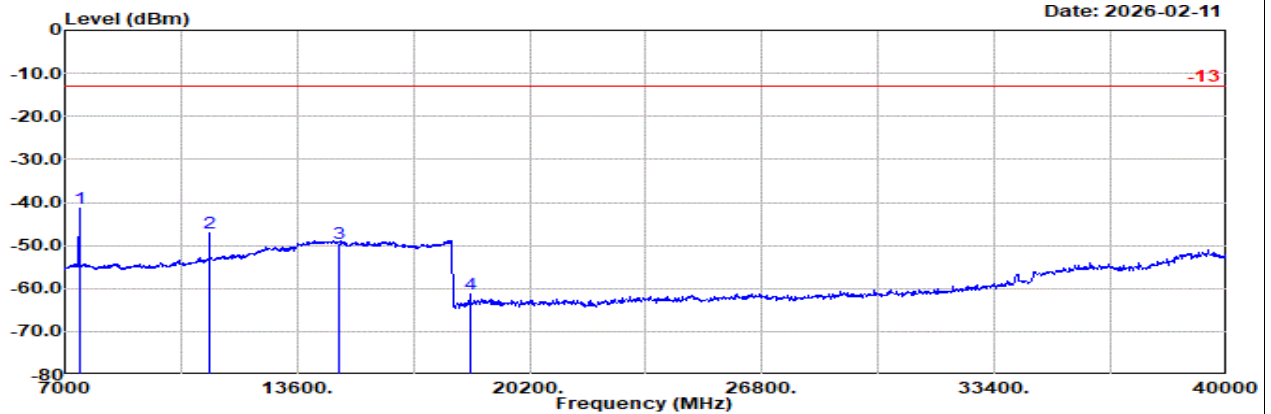


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 60M Ch648668 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
MHz	dBm									
1	7407.00	-41.50 RMS	36.89	-21.25	1.70	-95.23	36.39	-13.00	-28.50	Horizontal
2	11114.00	-47.10 RMS	38.00	-21.72	1.91	-95.23	29.94	-13.00	-34.10	Horizontal
3	14810.00	-49.54 RMS	41.30	-23.35	2.19	-95.23	25.55	-13.00	-36.54	Horizontal
4	18516.00	-61.36 RMS	38.10	-39.03	-9.54	-95.23	44.34	-13.00	-48.36	Horizontal

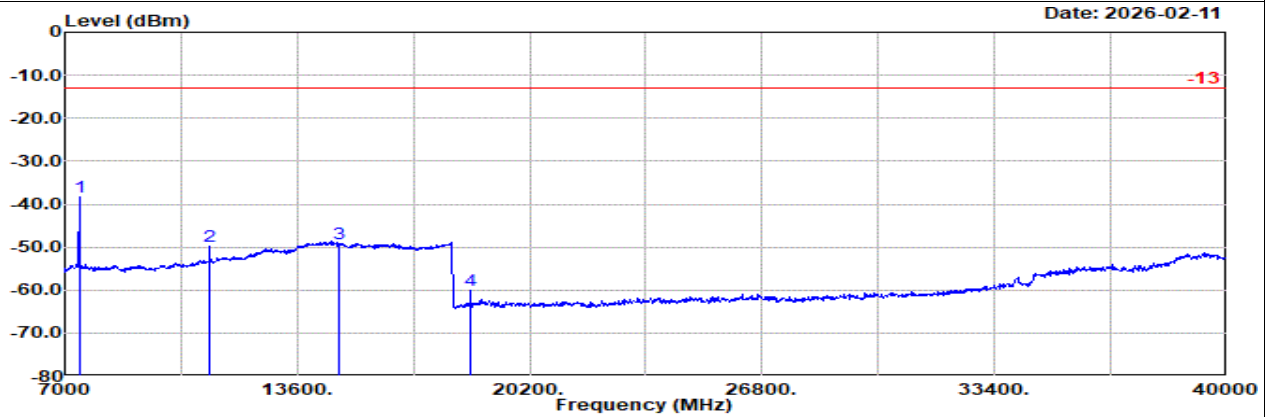

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 60M Ch648668 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
MHz	dBm									
1	7407.00	-38.39 RMS	36.89	-21.25	1.70	-95.23	39.50	-13.00	-25.39	Vertical
2	11114.00	-49.76 RMS	38.00	-21.72	1.91	-95.23	27.28	-13.00	-36.76	Vertical
3	14810.00	-49.32 RMS	41.30	-23.35	2.19	-95.23	25.77	-13.00	-36.32	Vertical
4	18516.00	-60.02 RMS	38.10	-39.03	-9.54	-95.23	45.68	-13.00	-47.02	Vertical




Ant. 9

Part 270 Mode 8

NR SA n77 60M Ch656000 1RB1 BPSK

M

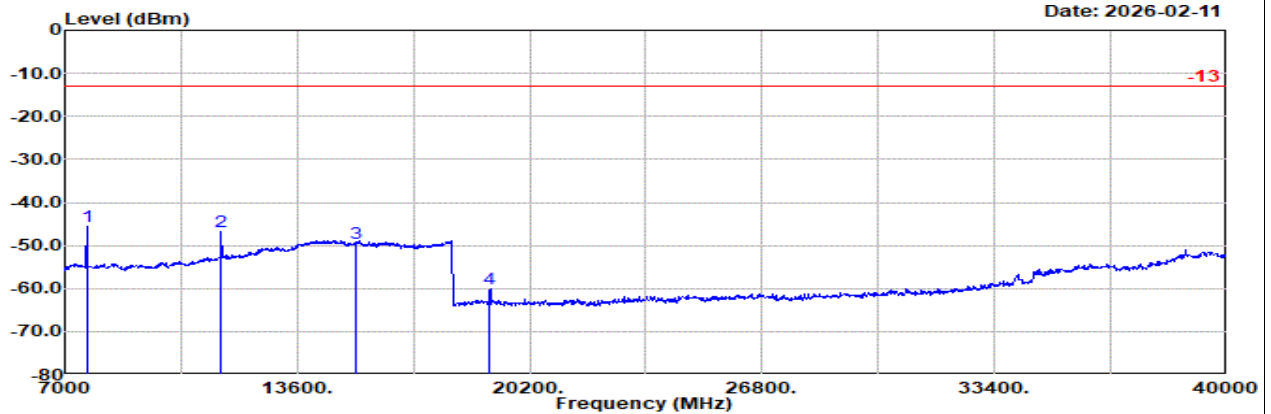


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 60M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
MHz	dBm									
1	7627.00	-45.63 RMS	36.60	-21.24	1.93	-95.23	32.31	-13.00	-32.63	Horizontal
2	11444.00	-46.89 RMS	38.40	-21.75	1.97	-95.23	29.72	-13.00	-33.89	Horizontal
3	15250.00	-49.41 RMS	41.10	-23.48	2.17	-95.23	26.03	-13.00	-36.41	Horizontal
4	19066.00	-60.04 RMS	38.24	-38.63	-9.54	-95.23	45.12	-13.00	-47.04	Horizontal

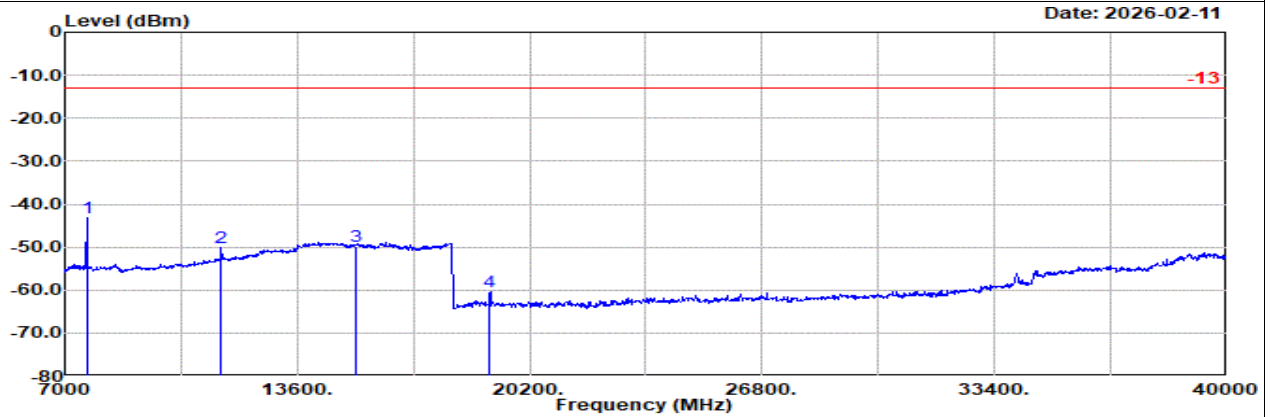

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 60M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
MHz	dBm									
1	7627.00	-43.17 RMS	36.60	-21.24	1.93	-95.23	34.77	-13.00	-30.17	Vertical
2	11444.00	-50.16 RMS	38.40	-21.75	1.97	-95.23	26.45	-13.00	-37.16	Vertical
3	15250.00	-49.88 RMS	41.10	-23.48	2.17	-95.23	25.56	-13.00	-36.88	Vertical
4	19066.00	-60.46 RMS	38.24	-38.63	-9.54	-95.23	44.70	-13.00	-47.46	Vertical




Ant. 9

Part 270 Mode 8

NR SA n77 60M Ch663332 1RB1 BPSK

H

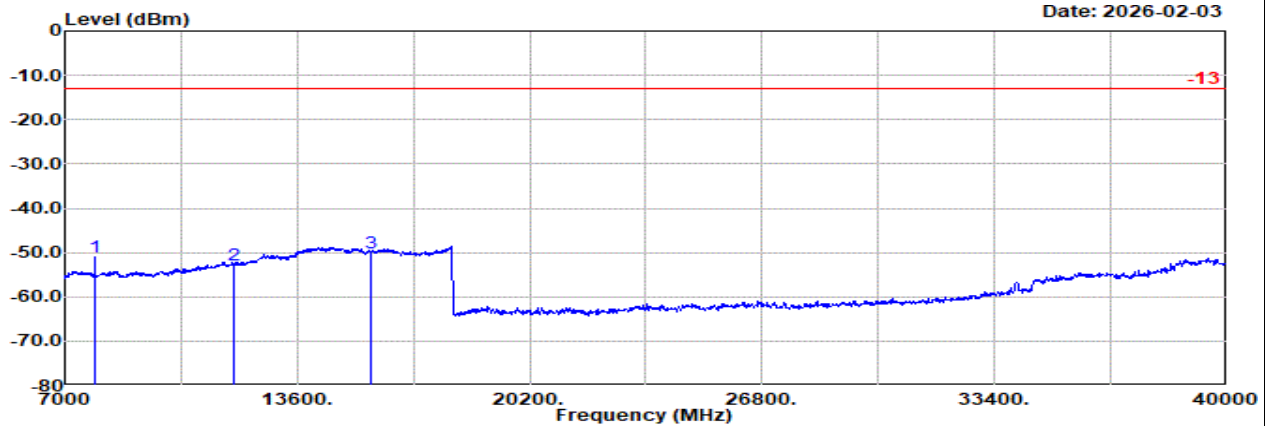


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 60M Ch663332 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7847.00	-51.04	RMS	36.60	-21.46	1.73	-95.23	27.32	-13.00	-38.04	Horizontal		
2	11774.00	-52.96	RMS	38.40	-21.85	2.03	-95.23	23.69	-13.00	-39.96	Horizontal		
3	15694.00	-50.09	RMS	40.82	-23.50	2.15	-95.23	25.67	-13.00	-37.09	Horizontal		

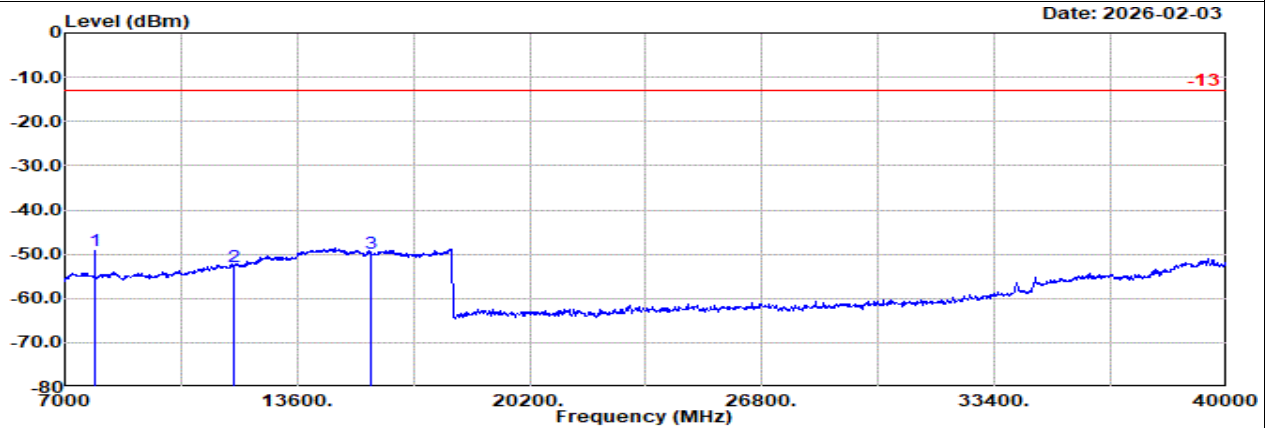

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 60M Ch663332 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7847.00	-49.18	RMS	36.60	-21.46	1.73	-95.23	29.18	-13.00	-36.18	Vertical		
2	11774.00	-52.74	RMS	38.40	-21.85	2.03	-95.23	23.91	-13.00	-39.74	Vertical		
3	15694.00	-49.82	RMS	40.82	-23.50	2.15	-95.23	25.94	-13.00	-36.82	Vertical		




Ant. 9

Part 270 Mode 9

NR SA n78 40M Ch648000 1RB1 BPSK

L

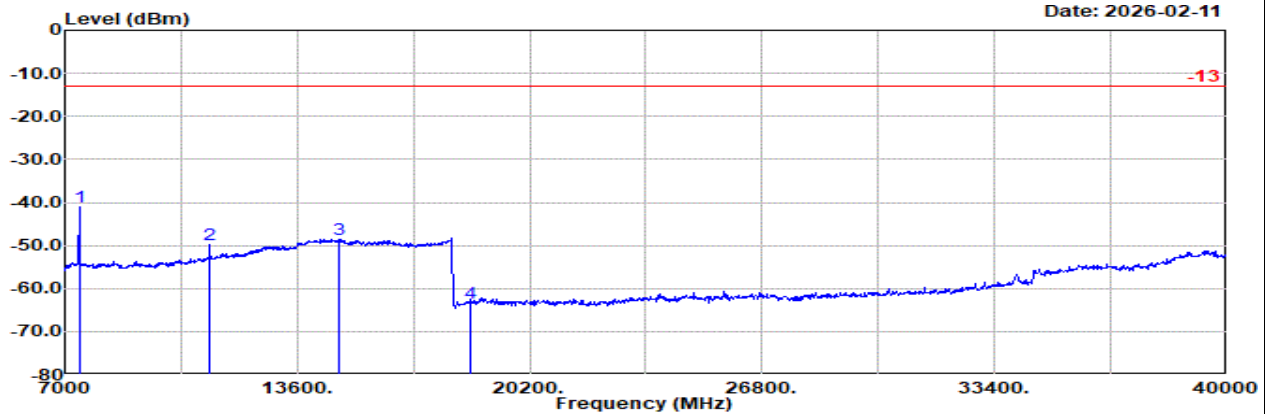


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	7405.00	-41.01	RMS	36.89	-21.25	1.70	-95.23	36.88	-13.00	-28.01	Horizontal
2	11107.00	-49.94	RMS	38.00	-21.72	1.91	-95.23	27.10	-13.00	-36.94	Horizontal
3	14809.00	-48.75	RMS	41.30	-23.35	2.19	-95.23	26.34	-13.00	-35.75	Horizontal
4	18511.00	-63.42	RMS	38.10	-39.03	-9.54	-95.23	42.28	-13.00	-50.42	Horizontal

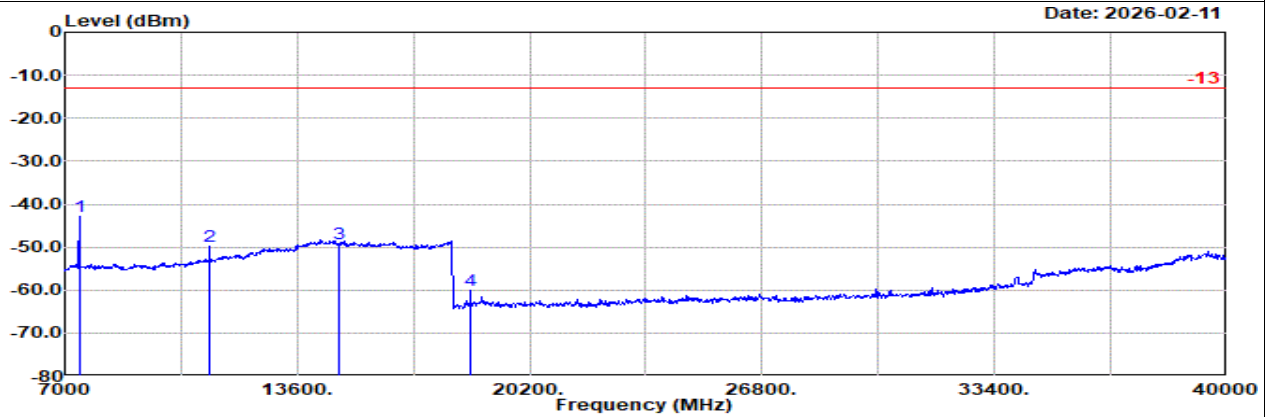

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	7405.00	-42.86	RMS	36.89	-21.25	1.70	-95.23	35.03	-13.00	-29.86	Vertical
2	11107.00	-49.84	RMS	38.00	-21.72	1.91	-95.23	27.20	-13.00	-36.84	Vertical
3	14809.00	-49.09	RMS	41.30	-23.35	2.19	-95.23	26.00	-13.00	-36.09	Vertical
4	18511.00	-60.19	RMS	38.10	-39.03	-9.54	-95.23	45.51	-13.00	-47.19	Vertical




Ant. 9

Part 270 Mode 9

NR SA n78 40M Ch650000 1RB1 BPSK

M

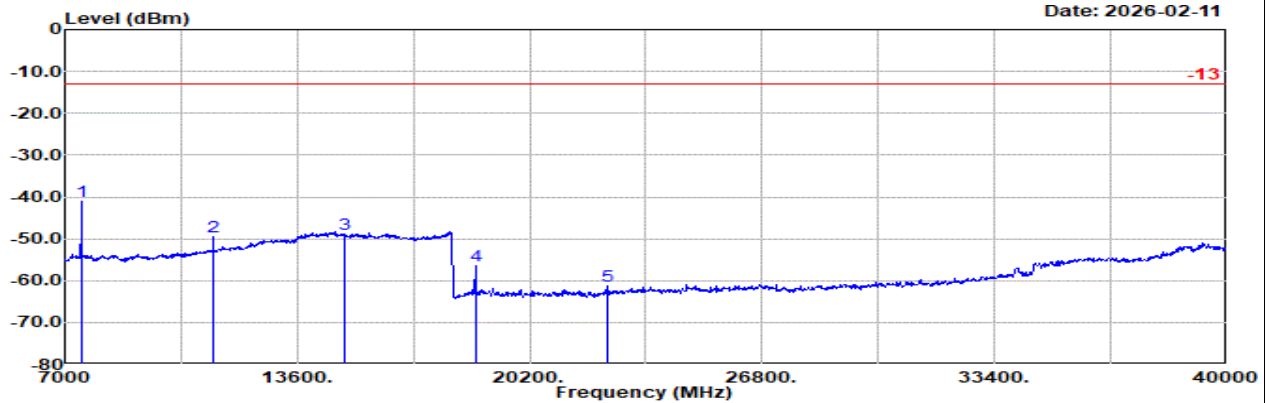


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch650000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7465.00	-41.13	RMS	36.77	-21.19	1.78	-95.23	36.74	-13.00	-28.13	Horizontal		
2	11197.00	-49.55	RMS	38.00	-21.73	1.93	-95.23	27.48	-13.00	-36.55	Horizontal		
3	14929.00	-48.93	RMS	41.20	-23.46	2.18	-95.23	26.38	-13.00	-35.93	Horizontal		
4	18661.00	-56.49	RMS	38.20	-38.94	-9.54	-95.23	49.02	-13.00	-43.49	Horizontal		
5	22394.00	-61.26	RMS	38.41	-33.19	-9.54	-95.23	38.29	-13.00	-48.26	Horizontal		

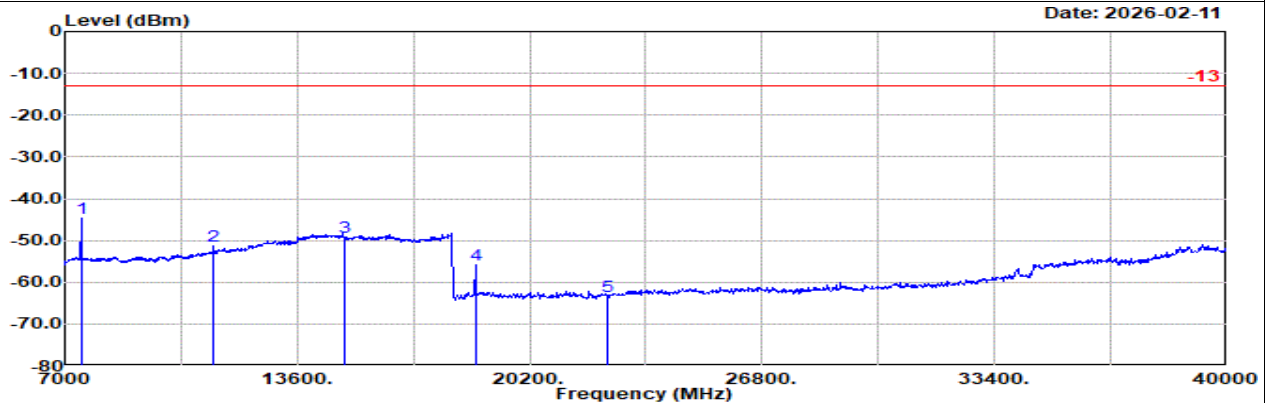

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch650000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7465.00	-44.68	RMS	36.77	-21.19	1.78	-95.23	33.19	-13.00	-31.68	Vertical		
2	11197.00	-51.24	RMS	38.00	-21.73	1.93	-95.23	25.79	-13.00	-38.24	Vertical		
3	14929.00	-49.18	RMS	41.20	-23.46	2.18	-95.23	26.13	-13.00	-36.18	Vertical		
4	18661.00	-55.88	RMS	38.20	-38.94	-9.54	-95.23	49.63	-13.00	-42.88	Vertical		
5	22394.00	-63.36	RMS	38.41	-33.19	-9.54	-95.23	36.19	-13.00	-50.36	Vertical		




Ant. 9

Part 270 Mode 9

NR SA n78 40M Ch652000 1RB1 BPSK

H

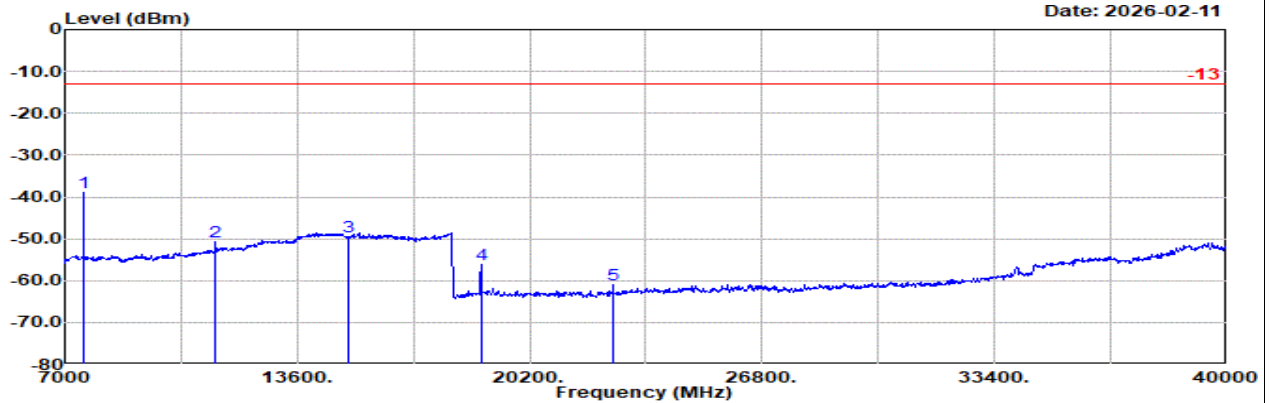


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch652000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7525.00	-39.09	RMS		36.65	-21.17	1.87	-95.23	38.80	-13.00	-26.09	Horizontal
2	11287.00	-50.80	RMS		38.27	-21.74	1.94	-95.23	25.96	-13.00	-37.80	Horizontal
3	15049.00	-49.64	RMS		41.00	-23.52	2.18	-95.23	25.93	-13.00	-36.64	Horizontal
4	18811.00	-56.20	RMS		38.22	-38.86	-9.54	-95.23	49.21	-13.00	-43.20	Horizontal
5	22574.00	-60.86	RMS		38.60	-33.00	-9.54	-95.23	38.31	-13.00	-47.86	Horizontal

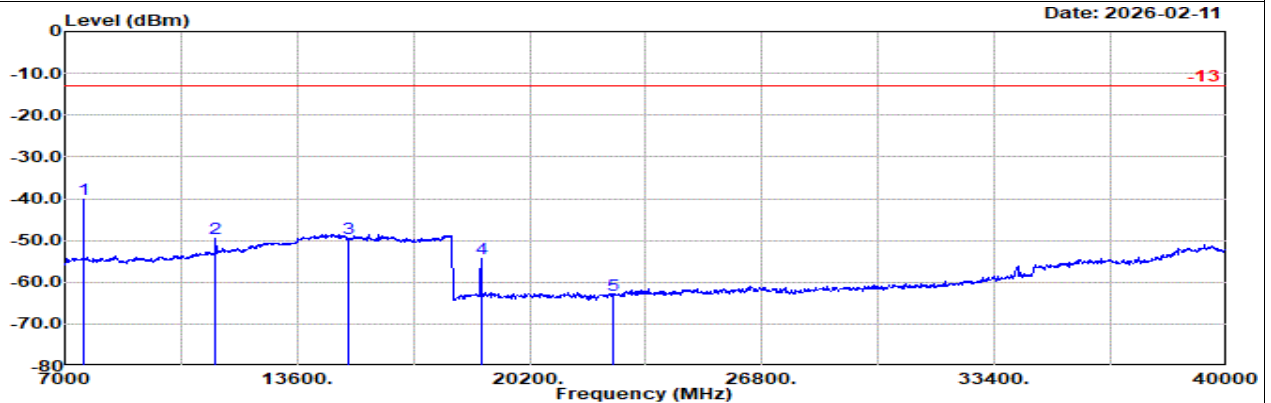

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch652000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7525.00	-40.26	RMS		36.65	-21.17	1.87	-95.23	37.63	-13.00	-27.26	Vertical
2	11287.00	-49.50	RMS		38.27	-21.74	1.94	-95.23	27.26	-13.00	-36.50	Vertical
3	15049.00	-49.59	RMS		41.00	-23.52	2.18	-95.23	25.98	-13.00	-36.59	Vertical
4	18811.00	-54.27	RMS		38.22	-38.86	-9.54	-95.23	51.14	-13.00	-41.27	Vertical
5	22574.00	-63.02	RMS		38.60	-33.00	-9.54	-95.23	36.15	-13.00	-50.02	Vertical




Ant. 1+9

Part 270 Mode 10

EN-DC B7+n77 10M + 60M Ch21100 1RB0 QPSK + Ch648668 1RB1 BPSK

L

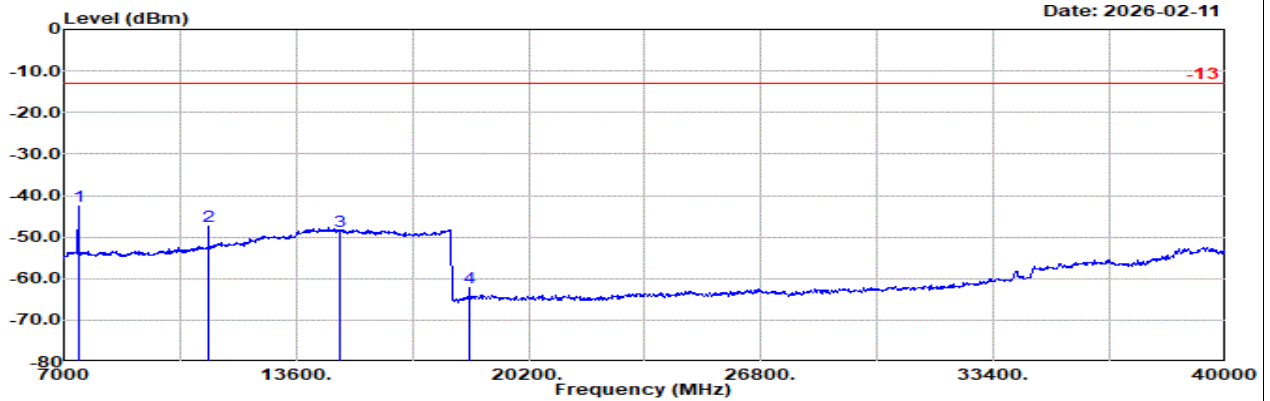


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch648668 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7407.00	-42.58 RMS	36.89	-21.25	1.70	-95.23	35.31	-13.00	-29.58	Horizontal
2	11110.00	-47.31 RMS	38.00	-21.72	1.91	-95.23	29.73	-13.00	-34.31	Horizontal
3	14813.00	-48.53 RMS	41.30	-23.35	2.19	-95.23	26.56	-13.00	-35.53	Horizontal
4	18516.00	-62.12 RMS	38.10	-39.03	-9.54	-95.23	43.58	-13.00	-49.12	Horizontal

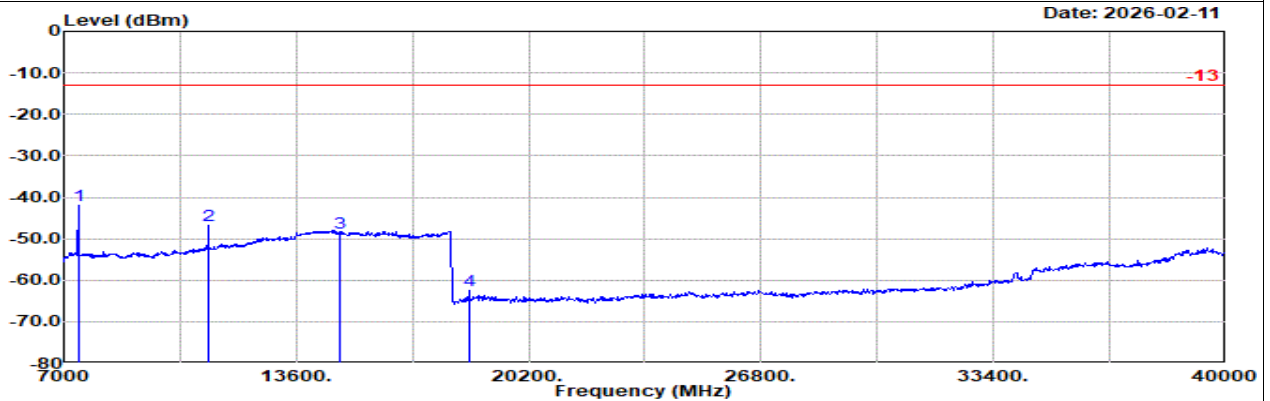

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch648668 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7407.00	-42.01 RMS	36.89	-21.25	1.70	-95.23	35.88	-13.00	-29.01	Vertical
2	11110.00	-46.69 RMS	38.00	-21.72	1.91	-95.23	30.35	-13.00	-33.69	Vertical
3	14813.00	-48.75 RMS	41.30	-23.35	2.19	-95.23	26.34	-13.00	-35.75	Vertical
4	18516.00	-62.59 RMS	38.10	-39.03	-9.54	-95.23	43.11	-13.00	-49.59	Vertical




Ant. 1+9

Part 270 Mode 10

EN-DC B7+n77 10M + 60M Ch21100 1RB0 QPSK + Ch656000 1RB1 BPSK

M

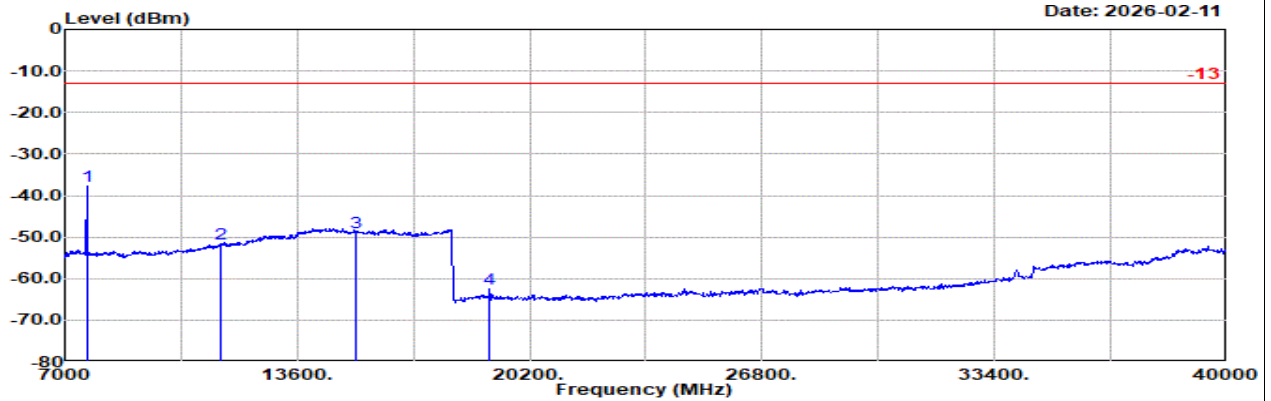


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	7627.00	-37.80 RMS	36.60	-21.24	1.93	-95.23	40.14	-13.00	-24.80	Horizontal
2	11440.00	-51.61 RMS	38.40	-21.75	1.97	-95.23	25.00	-13.00	-38.61	Horizontal
3	15253.00	-49.00 RMS	41.09	-23.48	2.17	-95.23	26.45	-13.00	-36.00	Horizontal
4	19066.00	-62.55 RMS	38.24	-38.63	-9.54	-95.23	42.61	-13.00	-49.55	Horizontal

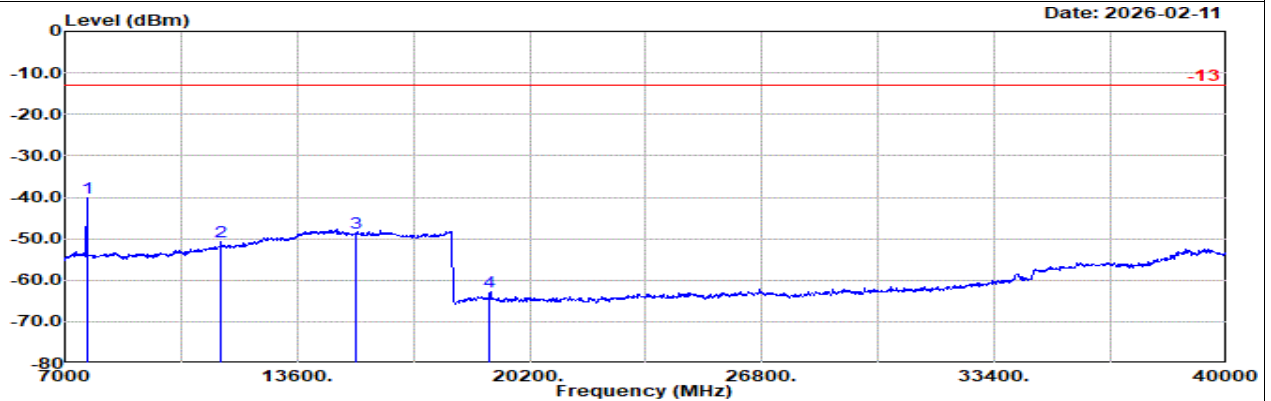

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch656000 1RB1 BPSK


Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	7627.00	-40.08 RMS	36.60	-21.24	1.93	-95.23	37.86	-13.00	-27.08	Vertical
2	11440.00	-50.77 RMS	38.40	-21.75	1.97	-95.23	25.84	-13.00	-37.77	Vertical
3	15253.00	-48.60 RMS	41.09	-23.48	2.17	-95.23	26.85	-13.00	-35.60	Vertical
4	19066.00	-62.82 RMS	38.24	-38.63	-9.54	-95.23	42.34	-13.00	-49.82	Vertical

Ant. 1+9

Part 270 Mode 10

EN-DC B7+n77 10M + 60M Ch21100 1RB0 QPSK + Ch663332 1RB1 BPSK

H

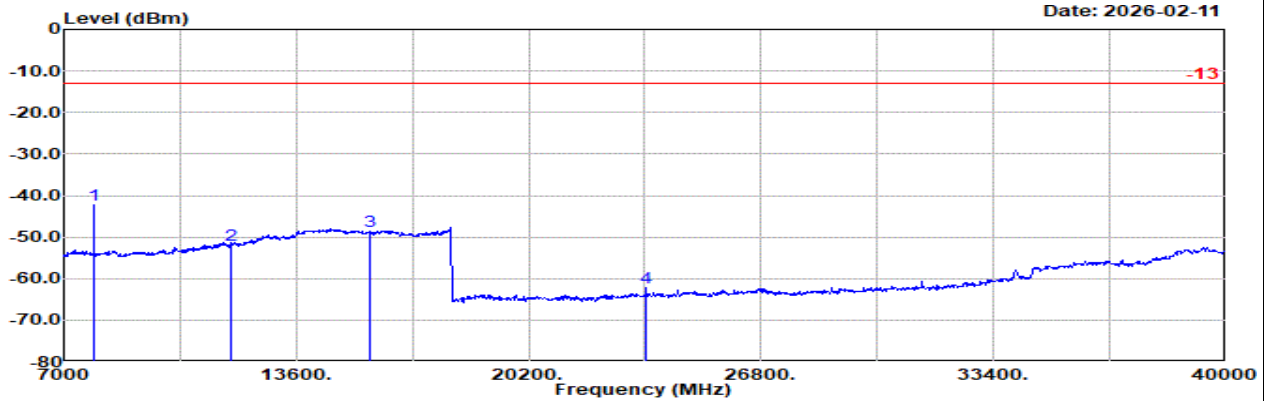


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch663332 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7847.00	-42.21 RMS	36.60	-21.46	1.73	-95.23	36.15	-13.00	-29.21	Horizontal
2	11770.00	-51.90 RMS	38.40	-21.84	2.03	-95.23	24.74	-13.00	-38.90	Horizontal
3	15693.00	-48.73 RMS	40.83	-23.50	2.15	-95.23	27.02	-13.00	-35.73	Horizontal
4	23540.00	-62.33 RMS	39.10	-32.11	-9.54	-95.23	35.45	-13.00	-49.33	Horizontal

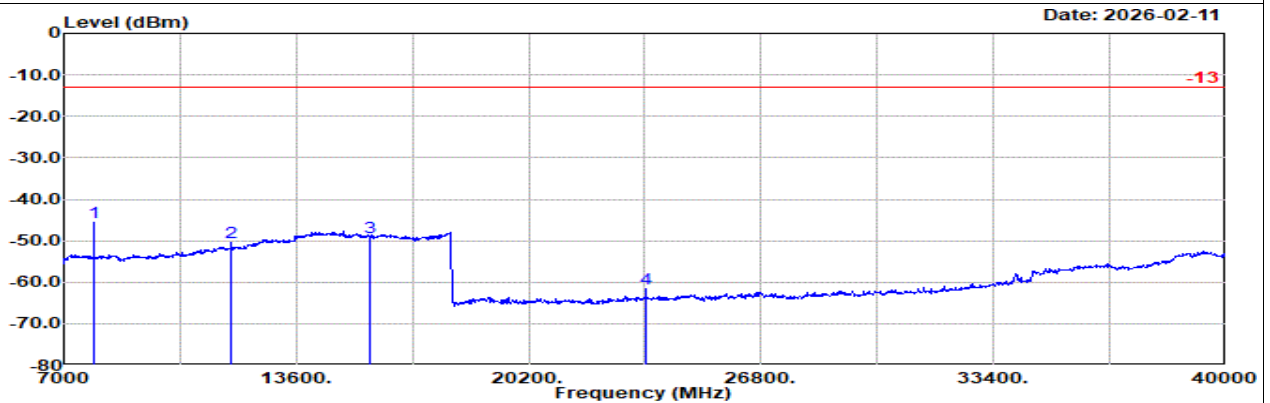

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 60M Ch663332 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7847.00	-45.51 RMS	36.60	-21.46	1.73	-95.23	32.85	-13.00	-32.51	Vertical
2	11770.00	-50.42 RMS	38.40	-21.84	2.03	-95.23	26.22	-13.00	-37.42	Vertical
3	15693.00	-49.06 RMS	40.83	-23.50	2.15	-95.23	26.69	-13.00	-36.06	Vertical
4	23540.00	-61.69 RMS	39.10	-32.11	-9.54	-95.23	36.09	-13.00	-48.69	Vertical




Ant. 8+9

Part 270 Mode 11

EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch648000 1RB1 BPSK

L

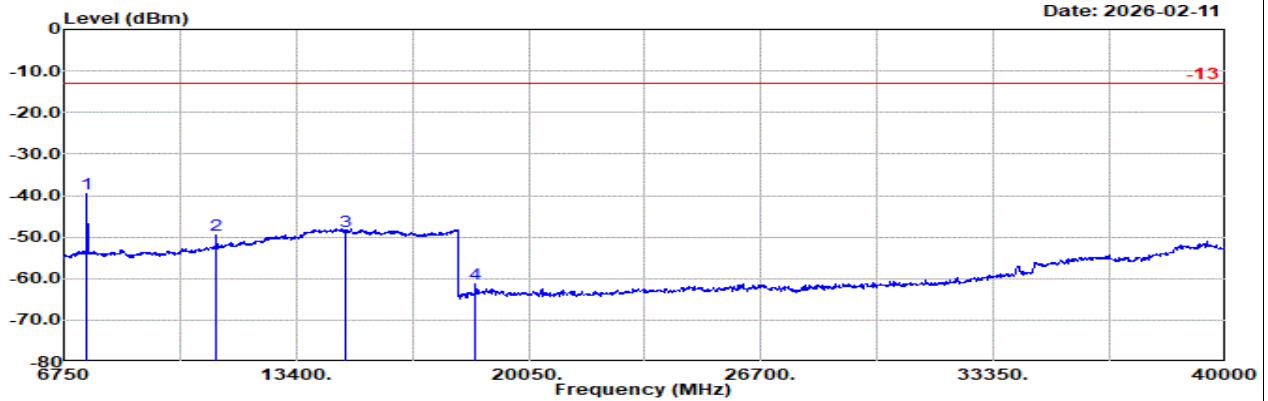


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch648000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-39.61 RMS	36.89	-21.25	1.70	-95.23	38.28	-13.00	-26.61	Horizontal
2	11107.00	-49.61 RMS	38.00	-21.72	1.91	-95.23	27.43	-13.00	-36.61	Horizontal
3	14809.00	-48.67 RMS	41.30	-23.35	2.19	-95.23	26.42	-13.00	-35.67	Horizontal
4	18528.00	-61.18 RMS	38.10	-39.02	-9.54	-95.23	44.51	-13.00	-48.18	Horizontal

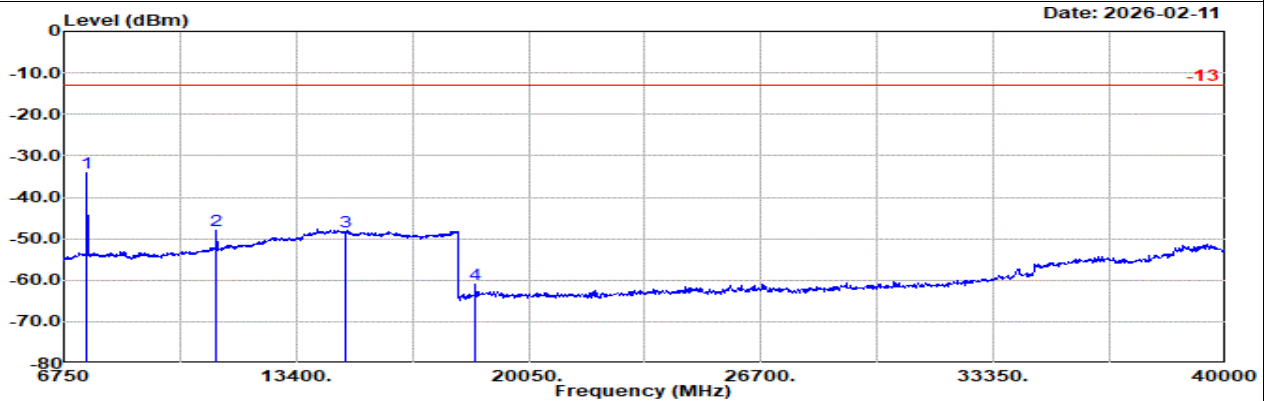

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch648000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-34.02 RMS	36.89	-21.25	1.70	-95.23	43.87	-13.00	-21.02	Vertical
2	11107.00	-47.91 RMS	38.00	-21.72	1.91	-95.23	29.13	-13.00	-34.91	Vertical
3	14809.00	-48.41 RMS	41.30	-23.35	2.19	-95.23	26.68	-13.00	-35.41	Vertical
4	18528.00	-61.06 RMS	38.10	-39.02	-9.54	-95.23	44.63	-13.00	-48.06	Vertical




Ant. 8+9

Part 270 Mode 11

EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch650000 1RB1 BPSK

M

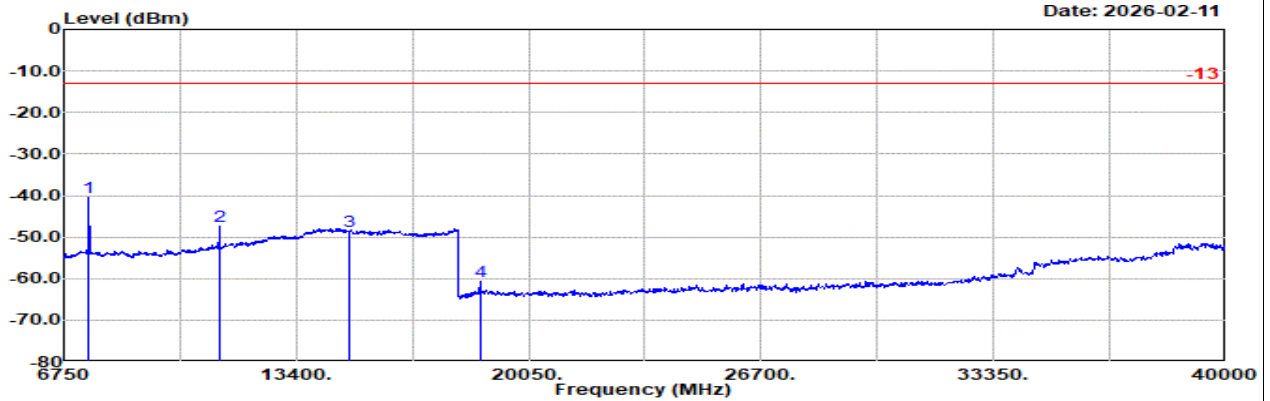


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch650000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7465.00	-40.56 RMS	36.77	-21.19	1.78	-95.23	37.31	-13.00	-27.56	Horizontal
2	11197.00	-47.28 RMS	38.00	-21.73	1.93	-95.23	29.75	-13.00	-34.28	Horizontal
3	14929.00	-48.51 RMS	41.20	-23.46	2.18	-95.23	26.80	-13.00	-35.51	Horizontal
4	18660.00	-60.80 RMS	38.20	-38.94	-9.54	-95.23	44.71	-13.00	-47.80	Horizontal

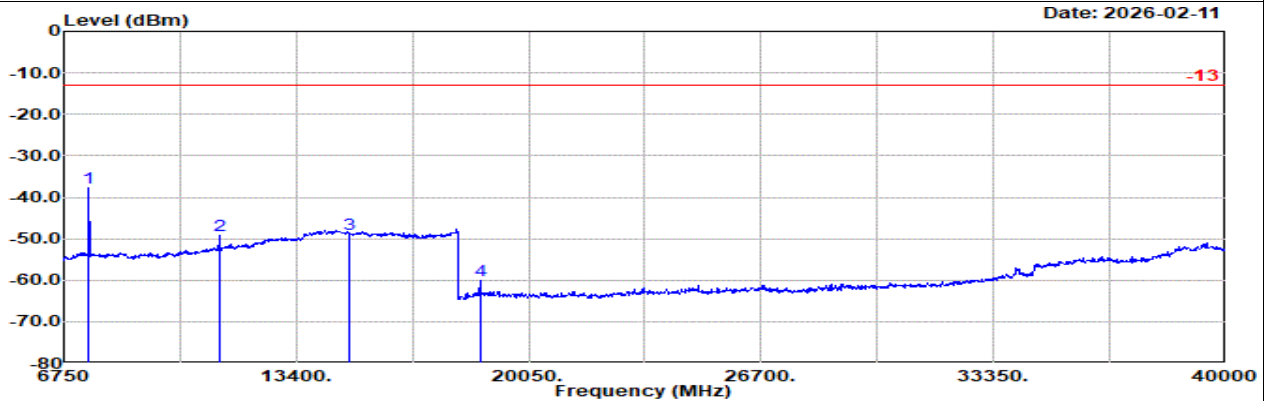

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch650000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7465.00	-37.80 RMS	36.77	-21.19	1.78	-95.23	40.07	-13.00	-24.80	Vertical
2	11197.00	-49.18 RMS	38.00	-21.73	1.93	-95.23	27.85	-13.00	-36.18	Vertical
3	14929.00	-48.80 RMS	41.20	-23.46	2.18	-95.23	26.51	-13.00	-35.80	Vertical
4	18660.00	-60.15 RMS	38.20	-38.94	-9.54	-95.23	45.36	-13.00	-47.15	Vertical




Ant. 8+9

Part 270 Mode 11

EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch652000 1RB1 BPSK

H

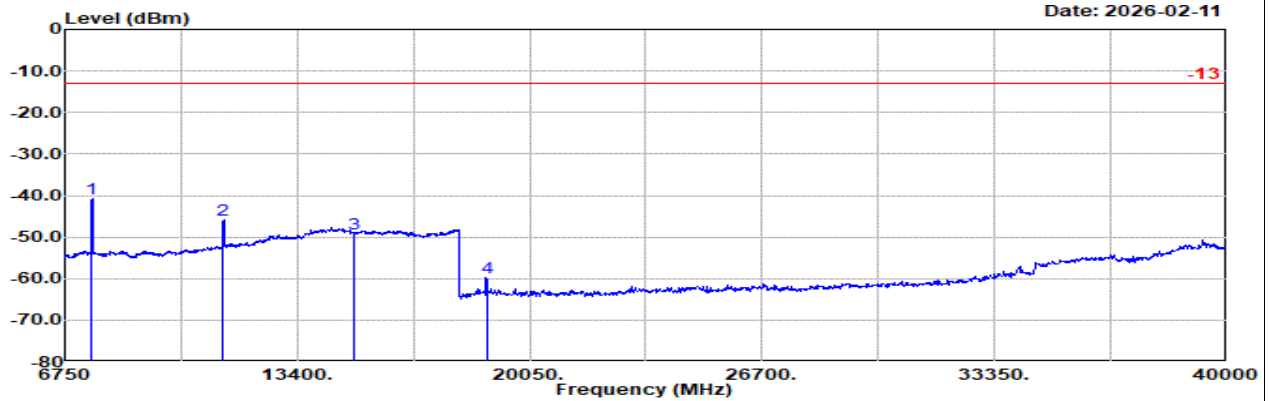


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch652000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7525.00	-40.76 RMS	36.65	-21.17	1.87	-95.23	37.13	-13.00	-27.76	Horizontal
2	11287.00	-45.99 RMS	38.27	-21.74	1.94	-95.23	30.77	-13.00	-32.99	Horizontal
3	15049.00	-49.14 RMS	41.00	-23.52	2.18	-95.23	26.43	-13.00	-36.14	Horizontal
4	18814.00	-59.88 RMS	38.23	-38.86	-9.54	-95.23	45.52	-13.00	-46.88	Horizontal

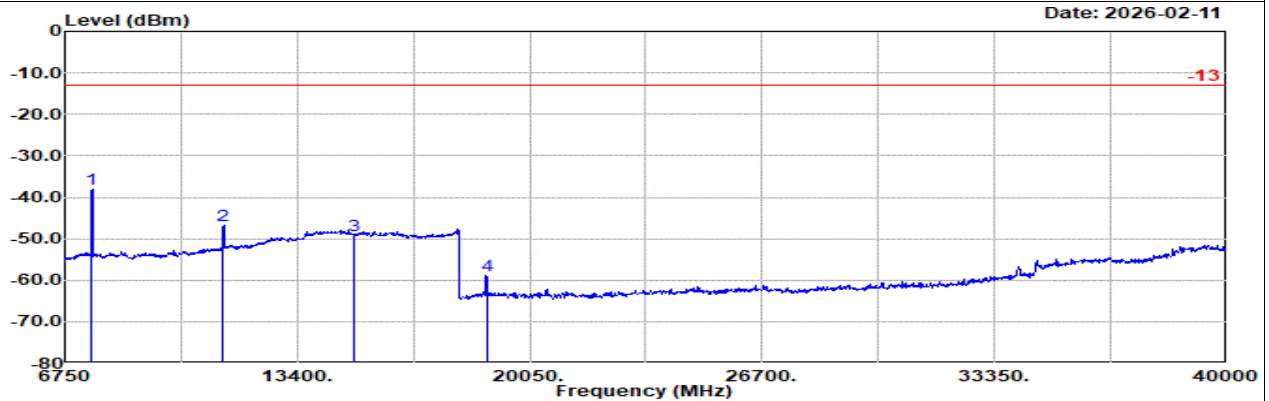

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n78 40M Ch652000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7525.00	-38.02 RMS	36.65	-21.17	1.87	-95.23	39.87	-13.00	-25.02	Vertical
2	11287.00	-46.81 RMS	38.27	-21.74	1.94	-95.23	29.95	-13.00	-33.81	Vertical
3	15049.00	-49.11 RMS	41.00	-23.52	2.18	-95.23	26.46	-13.00	-36.11	Vertical
4	18814.00	-58.89 RMS	38.23	-38.86	-9.54	-95.23	46.51	-13.00	-45.89	Vertical




Ant. 9

Part 27Q Mode 12

NR SA n77 30M Ch631000 1RB1 BPSK

L

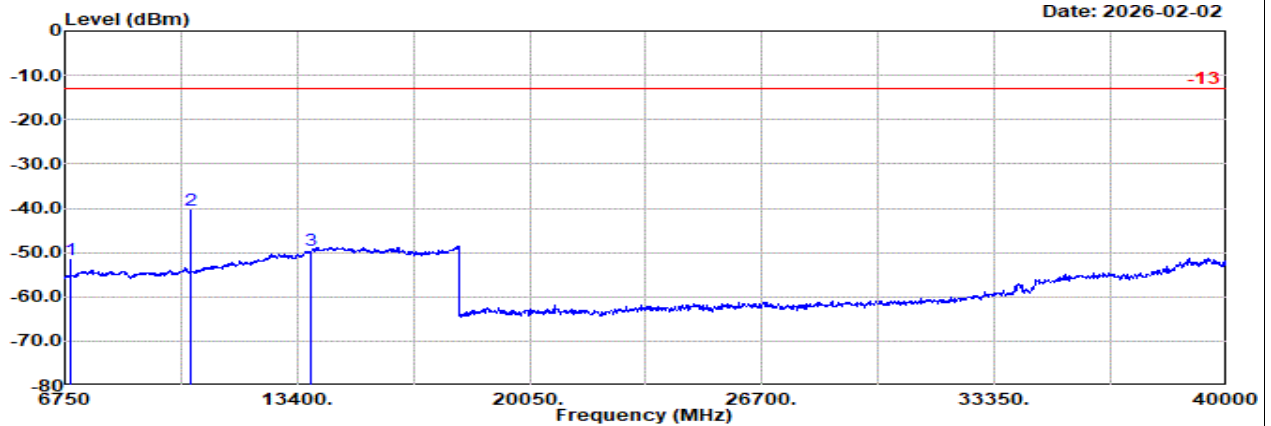


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 30M Ch631000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	6904.00	-51.63	RMS	36.01	-21.57	2.17	-95.23	26.99	-13.00	-38.63	Horizontal	
2	10355.00	-40.53	RMS	37.38	-21.75	1.77	-95.23	37.30	-13.00	-27.53	Horizontal	
3	13807.00	-49.62	RMS	40.40	-22.23	2.21	-95.23	25.23	-13.00	-36.62	Horizontal	

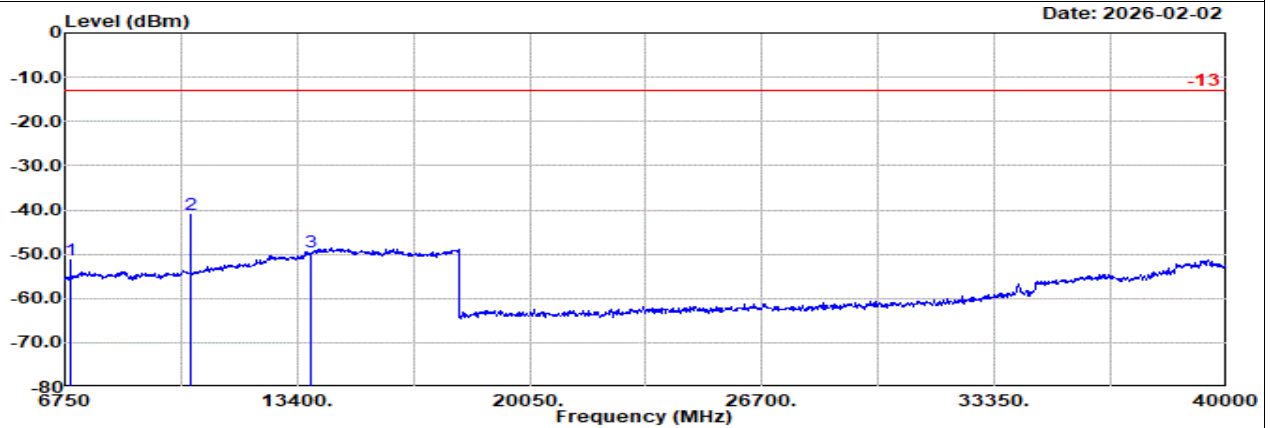

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 30M Ch631000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	6904.00	-51.28	RMS	36.01	-21.57	2.17	-95.23	27.34	-13.00	-38.28	Vertical	
2	10355.00	-40.94	RMS	37.38	-21.75	1.77	-95.23	36.89	-13.00	-27.94	Vertical	
3	13807.00	-49.40	RMS	40.40	-22.23	2.21	-95.23	25.45	-13.00	-36.40	Vertical	




Ant. 9

Part 27Q Mode 12

NR SA n77 30M Ch633334 1RB1 BPSK

M

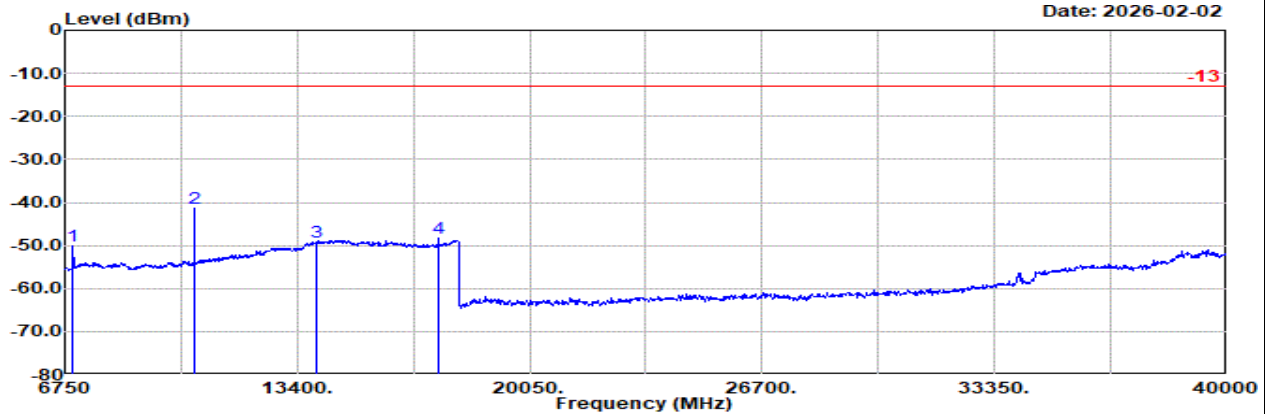


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 30M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	6974.00	-50.11	RMS	36.15	-21.59	1.99	-95.23	28.57	-13.00	-37.11	Horizontal
2	10460.00	-41.34	RMS	37.22	-21.81	1.79	-95.23	36.69	-13.00	-28.34	Horizontal
3	13947.00	-49.17	RMS	40.69	-22.27	2.23	-95.23	25.41	-13.00	-36.17	Horizontal
4	17434.00	-48.23	RMS	39.90	-23.99	2.43	-95.23	28.66	-13.00	-35.23	Horizontal

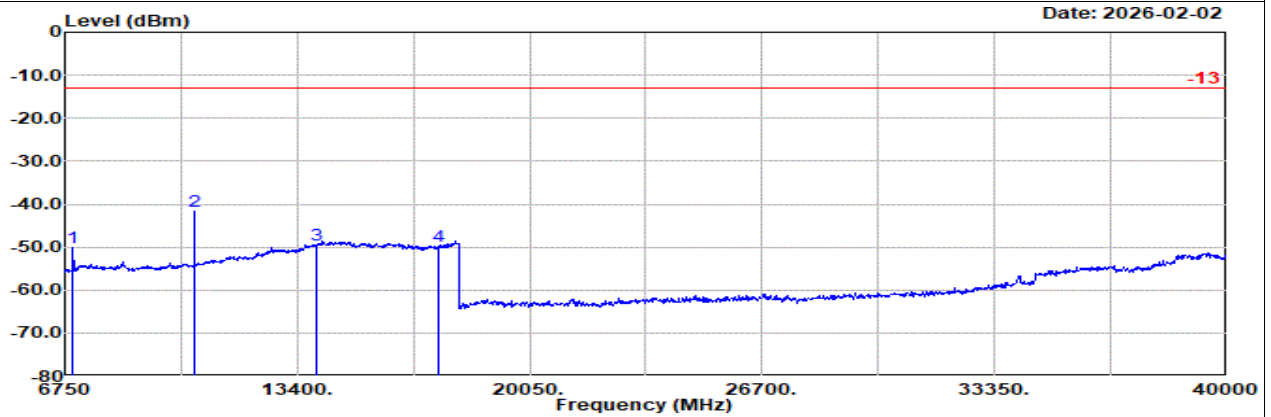

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 30M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	6974.00	-49.98	RMS	36.15	-21.59	1.99	-95.23	28.70	-13.00	-36.98	Vertical
2	10460.00	-41.72	RMS	37.22	-21.81	1.79	-95.23	36.31	-13.00	-28.72	Vertical
3	13947.00	-49.37	RMS	40.69	-22.27	2.23	-95.23	25.21	-13.00	-36.37	Vertical
4	17434.00	-49.79	RMS	39.90	-23.99	2.43	-95.23	27.10	-13.00	-36.79	Vertical




Ant. 9

Part 27Q Mode 12

NR SA n77 30M Ch635666 1RB1 BPSK

H

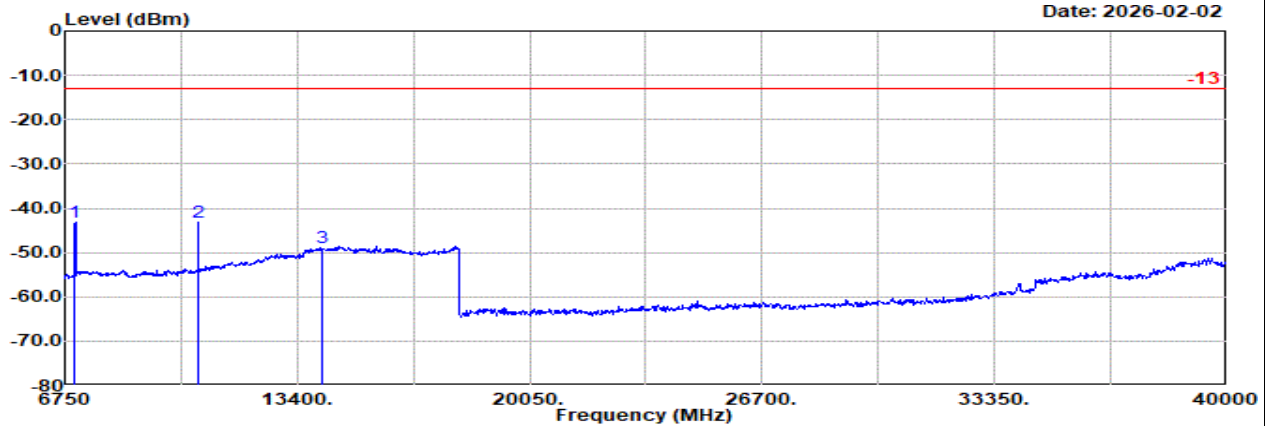


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n77 30M Ch635666 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7044.00	-43.12	RMS	36.11	-21.56	1.95	-95.23	35.61	-13.00	-30.12	Horizontal		
2	10565.00	-43.12	RMS	37.43	-21.81	1.81	-95.23	34.68	-13.00	-30.12	Horizontal		
3	14087.00	-49.01	RMS	40.87	-22.41	2.23	-95.23	25.53	-13.00	-36.01	Horizontal		

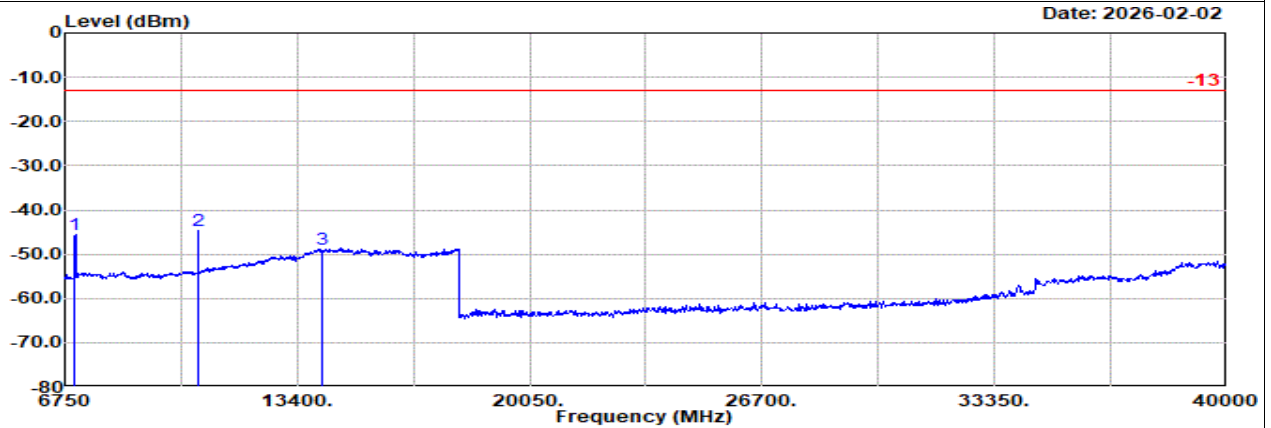

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n77 30M Ch635666 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7044.00	-45.64	RMS	36.11	-21.56	1.95	-95.23	33.09	-13.00	-32.64	Vertical		
2	10565.00	-44.55	RMS	37.43	-21.81	1.81	-95.23	33.25	-13.00	-31.55	Vertical		
3	14087.00	-48.96	RMS	40.87	-22.41	2.23	-95.23	25.58	-13.00	-35.96	Vertical		




Ant. 9

Part 27Q Mode 13

NR SA n78 40M Ch631334 1RB1 BPSK

L

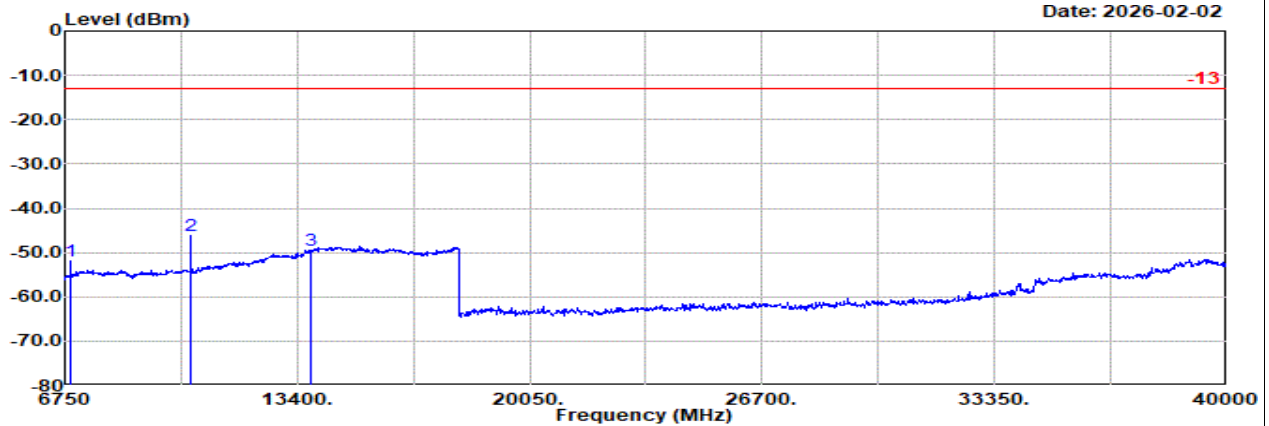


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch631334 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit	Margin Pol	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	6905.00	-52.04	RMS	36.01	-21.57	2.17	-95.23	26.58	-13.00	-39.04	Horizontal
2	10357.00	-46.28	RMS	37.37	-21.75	1.77	-95.23	31.56	-13.00	-33.28	Horizontal
3	13809.00	-49.48	RMS	40.40	-22.23	2.21	-95.23	25.37	-13.00	-36.48	Horizontal

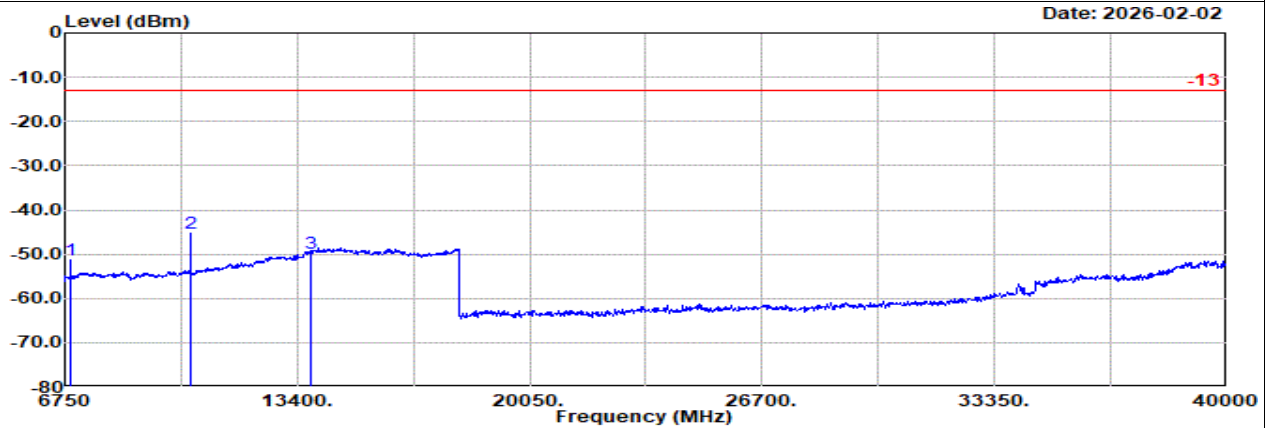

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch631334 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit	Margin Pol	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	6905.00	-51.21	RMS	36.01	-21.57	2.17	-95.23	27.41	-13.00	-38.21	Vertical
2	10357.00	-45.30	RMS	37.37	-21.75	1.77	-95.23	32.54	-13.00	-32.30	Vertical
3	13809.00	-49.73	RMS	40.40	-22.23	2.21	-95.23	25.12	-13.00	-36.73	Vertical




Ant. 9

Part 27Q Mode 13

NR SA n78 40M Ch633334 1RB1 BPSK

M

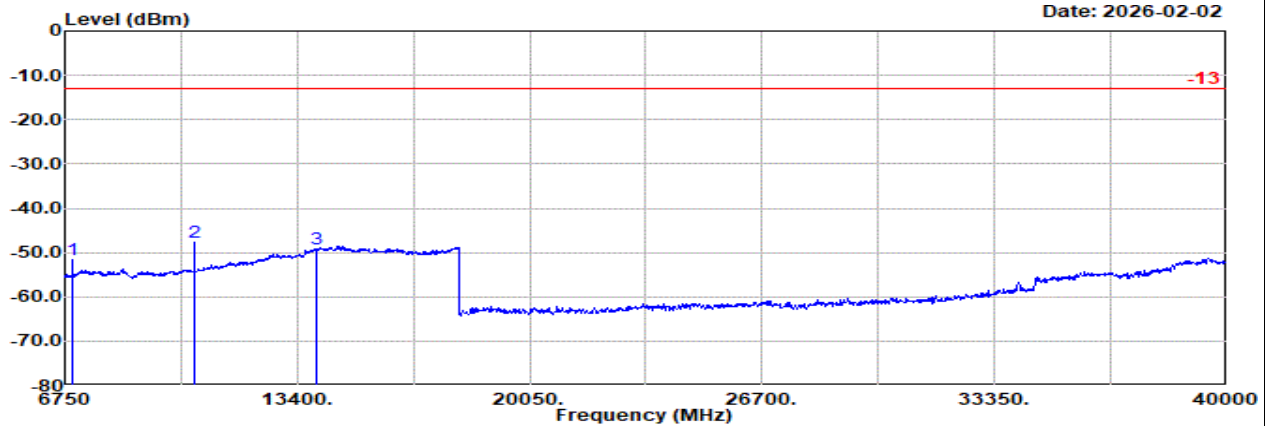


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch633334 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	6965.00	-51.58	RMS	36.13	-21.59	2.01	-95.23	27.10	-13.00	-38.58	Horizontal	
2	10447.00	-47.68	RMS	37.20	-21.80	1.79	-95.23	30.36	-13.00	-34.68	Horizontal	
3	13929.00	-49.20	RMS	40.66	-22.26	2.22	-95.23	25.41	-13.00	-36.20	Horizontal	

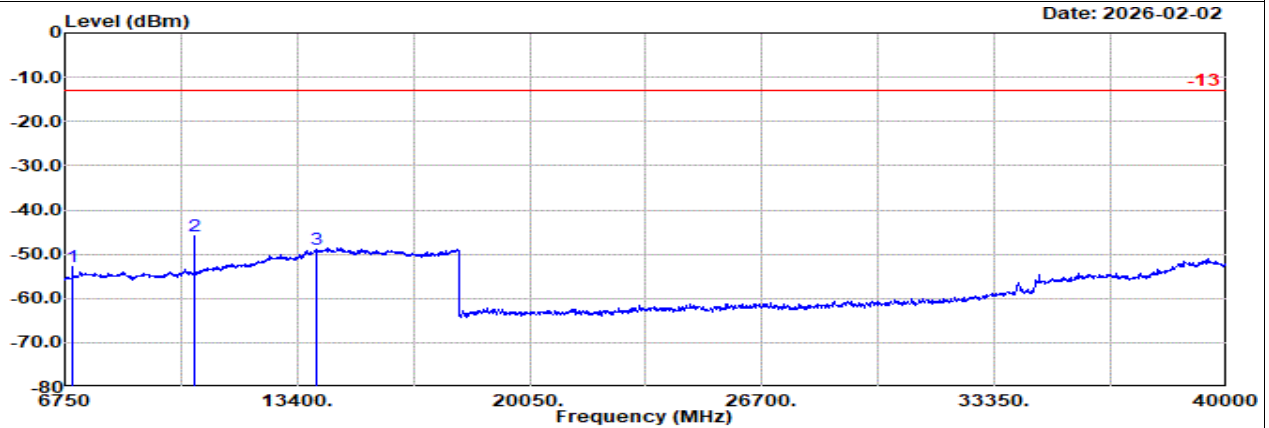

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch633334 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	6965.00	-52.85	RMS	36.13	-21.59	2.01	-95.23	25.83	-13.00	-39.85	Vertical	
2	10447.00	-45.79	RMS	37.20	-21.80	1.79	-95.23	32.25	-13.00	-32.79	Vertical	
3	13929.00	-48.88	RMS	40.66	-22.26	2.22	-95.23	25.73	-13.00	-35.88	Vertical	




Ant. 9

Part 27Q Mode 13

NR SA n78 40M Ch635332 1RB1 BPSK

H

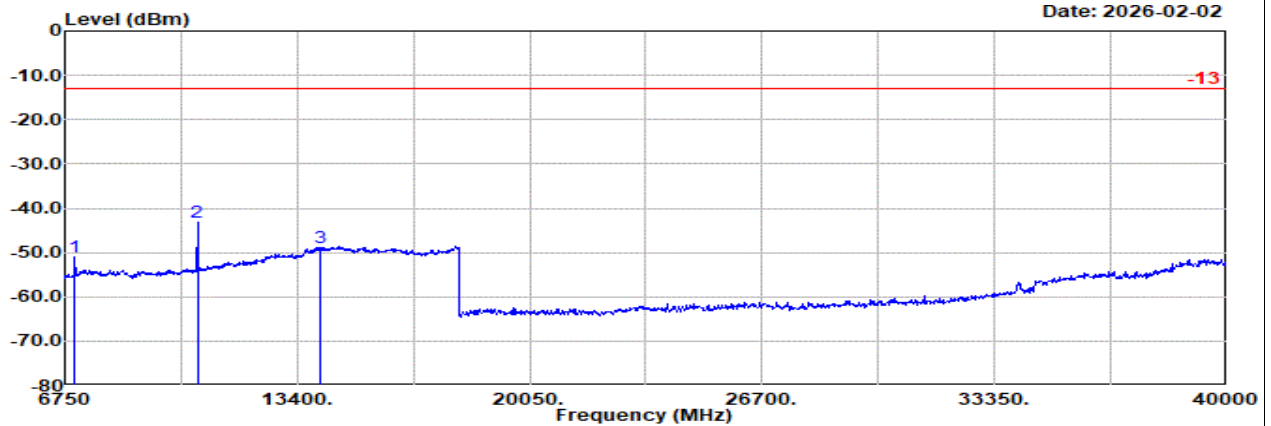


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: SA n78 40M Ch635332 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7025.00	-51.14	RMS	36.15	-21.58	1.94	-95.23	27.58	-13.00	-38.14	Horizontal		
2	10537.00	-43.16	RMS	37.37	-21.82	1.81	-95.23	34.71	-13.00	-30.16	Horizontal		
3	14049.00	-48.98	RMS	40.80	-22.36	2.23	-95.23	25.58	-13.00	-35.98	Horizontal		

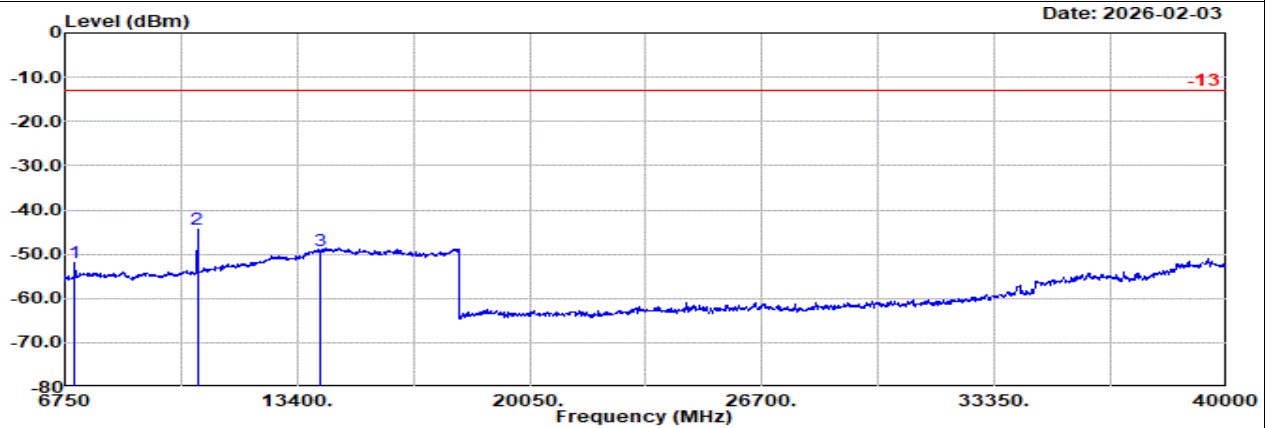

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: SA n78 40M Ch635332 1RB1 BPSK


	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	7025.00	-52.04	RMS	36.15	-21.58	1.94	-95.23	26.68	-13.00	-39.04	Vertical		
2	10537.00	-44.28	RMS	37.37	-21.82	1.81	-95.23	33.59	-13.00	-31.28	Vertical		
3	14049.00	-49.33	RMS	40.80	-22.36	2.23	-95.23	25.23	-13.00	-36.33	Vertical		

Ant. 1+9

Part 27Q Mode 14

EN-DC B7+n77 10M + 30M Ch21100 1RB0 QPSK + Ch631000 1RB1 BPSK

L

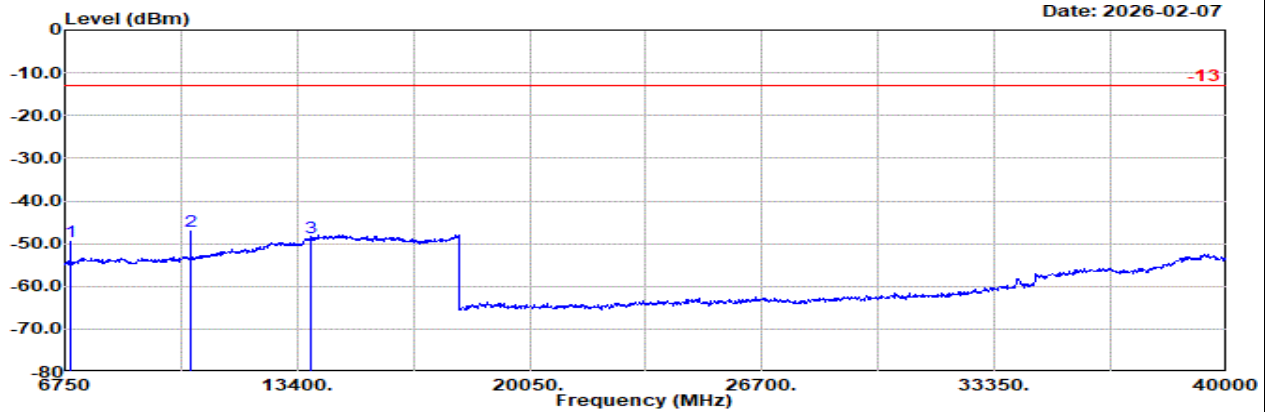


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 30M Ch631000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1	dB		dB	g		
1	6904.00	-49.46	RMS	36.01	-21.57	2.17	-95.23	29.16	-13.00	-36.46	Horizontal
2	10355.00	-47.18	RMS	37.38	-21.75	1.77	-95.23	30.65	-13.00	-34.18	Horizontal
3	13807.00	-48.57	RMS	40.40	-22.23	2.21	-95.23	26.28	-13.00	-35.57	Horizontal

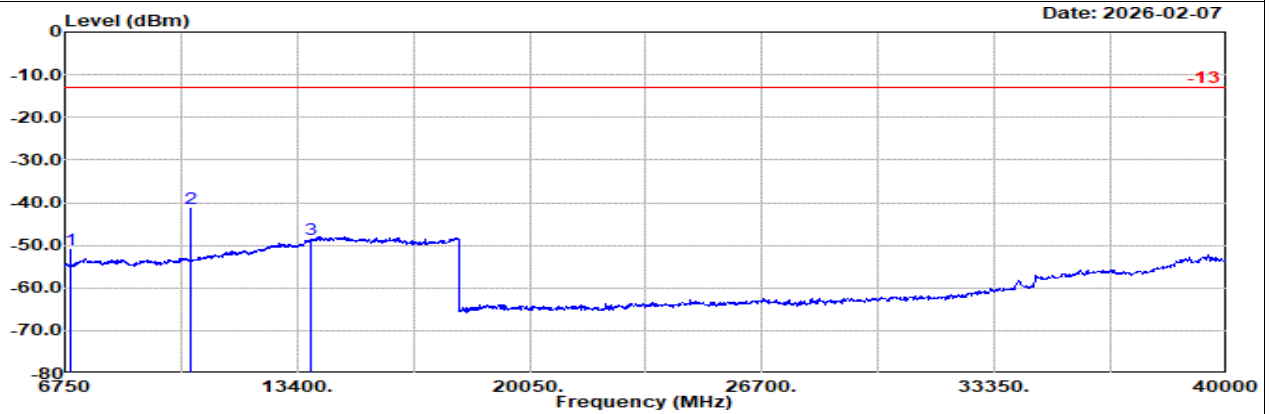

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: LTE Band 7 10M Ch21100 1RB0 QPSK

: SA n77 30M Ch631000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	6904.00	-50.92	RMS	36.01	-21.57	2.17	-95.23	27.70	-13.00	-37.92	Vertical
2	10355.00	-41.32	RMS	37.38	-21.75	1.77	-95.23	36.51	-13.00	-28.32	Vertical
3	13807.00	-48.54	RMS	40.40	-22.23	2.21	-95.23	26.31	-13.00	-35.54	Vertical




Ant. 1+9

Part 27Q Mode 14


EN-DC B7+n77 10M + 30M Ch21100 1RB0 QPSK + Ch633334 1RB1 BPSK

M

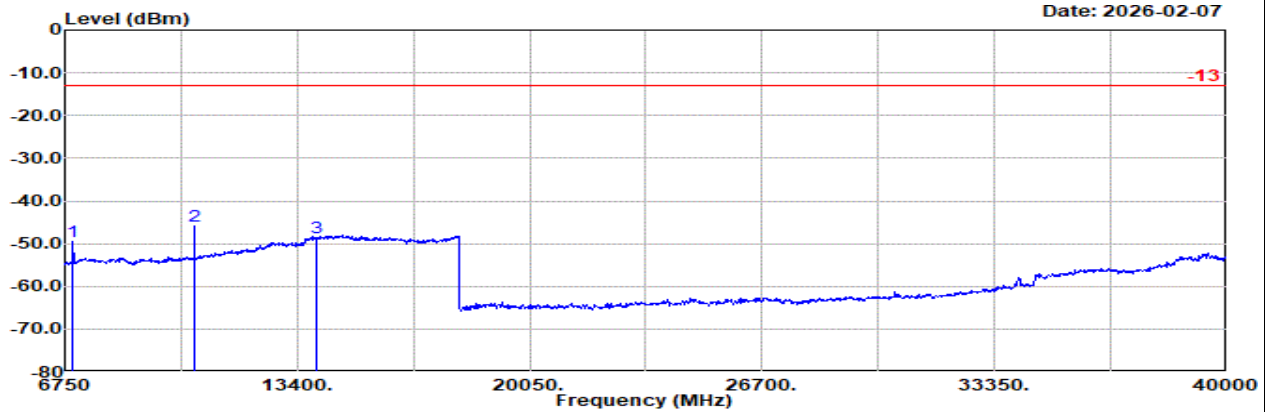

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE Band 7 10M Ch21100 1RB0 QPSK
: SA n77 30M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	6974.00	-49.45	RMS	36.15	-21.59	1.99	-95.23	29.23	-13.00	-36.45	Horizontal		
2	10460.00	-45.76	RMS	37.22	-21.81	1.79	-95.23	32.27	-13.00	-32.76	Horizontal		
3	13947.00	-48.70	RMS	40.69	-22.27	2.23	-95.23	25.88	-13.00	-35.70	Horizontal		

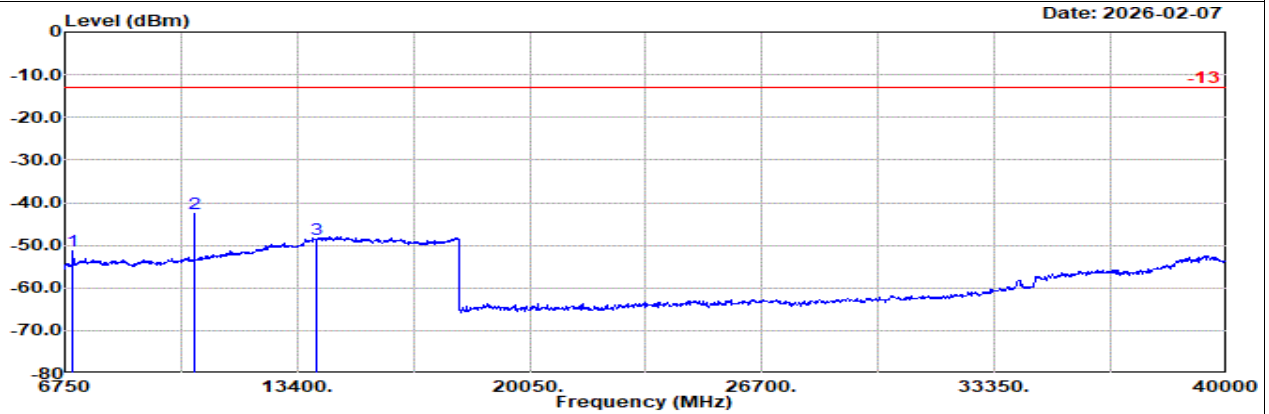

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE Band 7 10M Ch21100 1RB0 QPSK
: SA n77 30M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	6974.00	-51.31	RMS	36.15	-21.59	1.99	-95.23	27.37	-13.00	-38.31	Vertical		
2	10460.00	-42.54	RMS	37.22	-21.81	1.79	-95.23	35.49	-13.00	-29.54	Vertical		
3	13947.00	-48.75	RMS	40.69	-22.27	2.23	-95.23	25.83	-13.00	-35.75	Vertical		




Ant. 1+9

Part 27Q Mode 14


EN-DC B7+n77 10M + 30M Ch21100 1RB0 QPSK + Ch635666 1RB1 BPSK

H

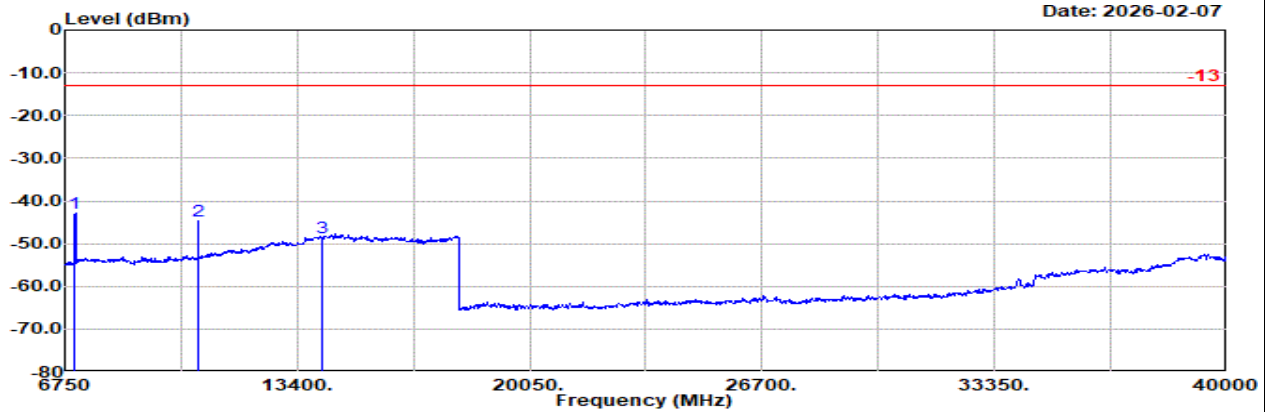

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE Band 7 10M Ch21100 1RB0 QPSK
: SA n77 30M Ch635666 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1			g	dBm		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm	dB	
1	7044.00	-42.92	RMS	36.11	-21.56	1.95	-95.23	35.81	-13.00	-29.92	Horizontal
2	10565.00	-44.57	RMS	37.43	-21.81	1.81	-95.23	33.23	-13.00	-31.57	Horizontal
3	14087.00	-48.63	RMS	40.87	-22.41	2.23	-95.23	25.91	-13.00	-35.63	Horizontal

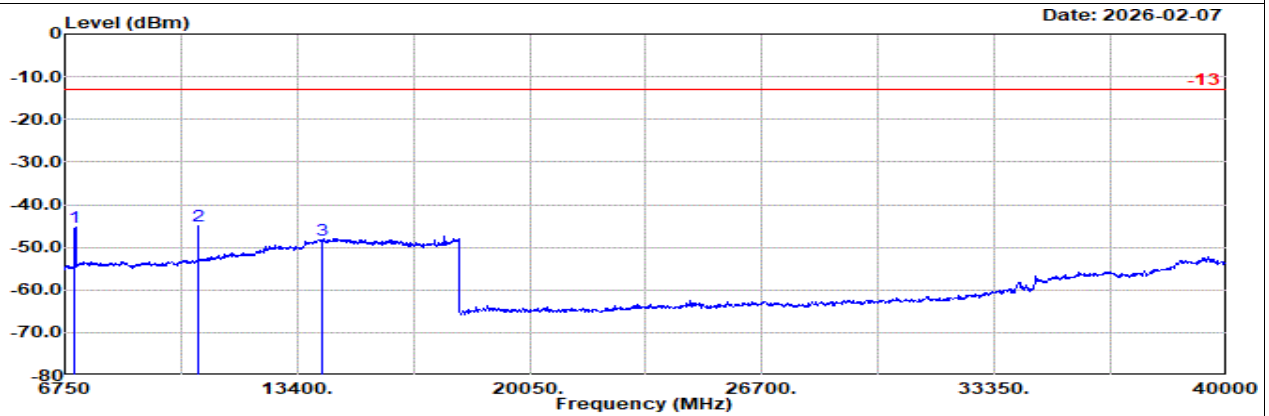

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE Band 7 10M Ch21100 1RB0 QPSK
: SA n77 30M Ch635666 1RB1 BPSK


	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7044.00	-45.40	RMS	36.11	-21.56	1.95	-95.23	33.33	-13.00	-32.40	Vertical
2	10565.00	-45.11	RMS	37.43	-21.81	1.81	-95.23	32.69	-13.00	-32.11	Vertical
3	14087.00	-48.22	RMS	40.87	-22.41	2.23	-95.23	26.32	-13.00	-35.22	Vertical

Ant. 8+9

Part 27Q Mode 15


EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch631334 1RB1 BPSK

L

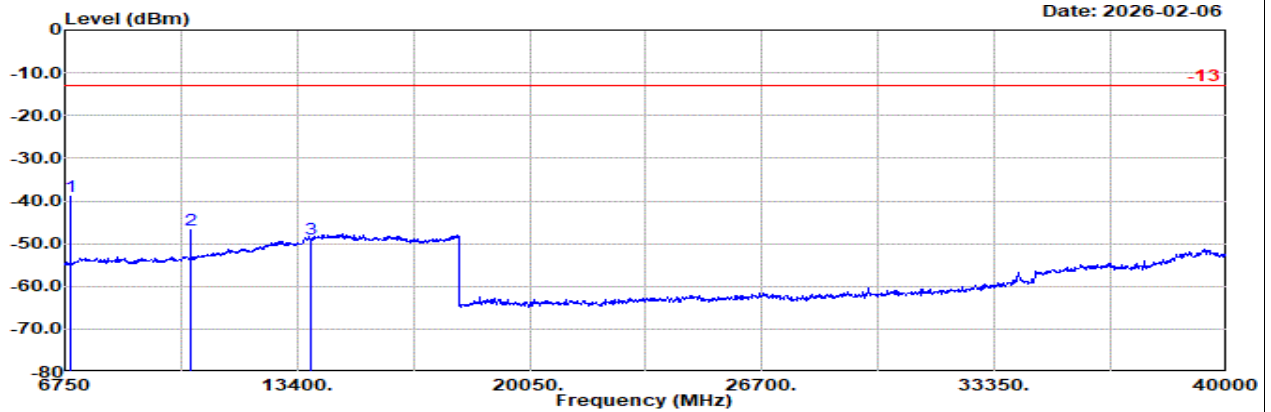

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch631334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	6905.00	-39.04	RMS	36.01	-21.57	2.17	-95.23	39.58	-13.00	-26.04	Horizontal	
2	10357.00	-46.83	RMS	37.37	-21.75	1.77	-95.23	31.01	-13.00	-33.83	Horizontal	
3	13809.00	-48.88	RMS	40.40	-22.23	2.21	-95.23	25.97	-13.00	-35.88	Horizontal	

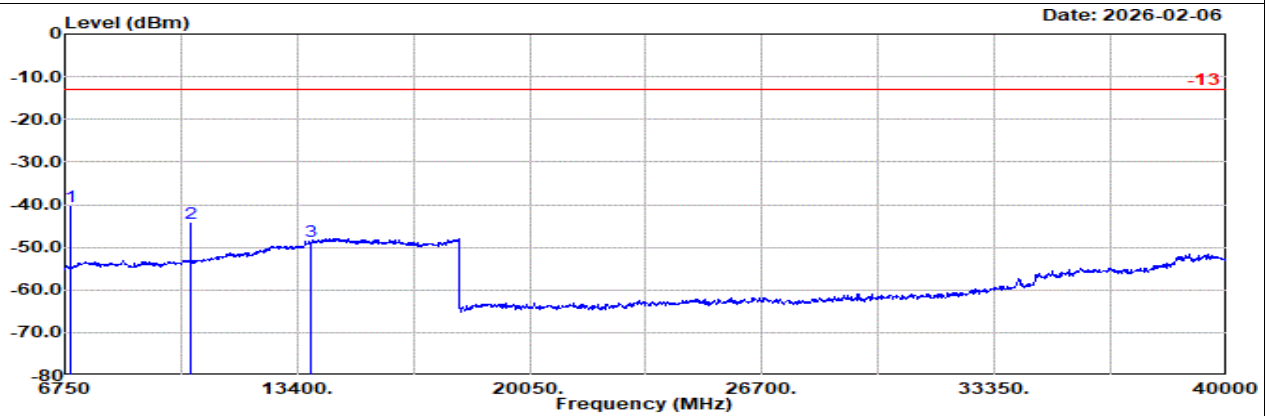

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch631334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	6905.00	-40.42	RMS	36.01	-21.57	2.17	-95.23	38.20	-13.00	-27.42	Vertical	
2	10357.00	-44.28	RMS	37.37	-21.75	1.77	-95.23	33.56	-13.00	-31.28	Vertical	
3	13809.00	-48.62	RMS	40.40	-22.23	2.21	-95.23	26.23	-13.00	-35.62	Vertical	




Ant. 8+9

Part 27Q Mode 15


EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch633334 1RB1 BPSK

M

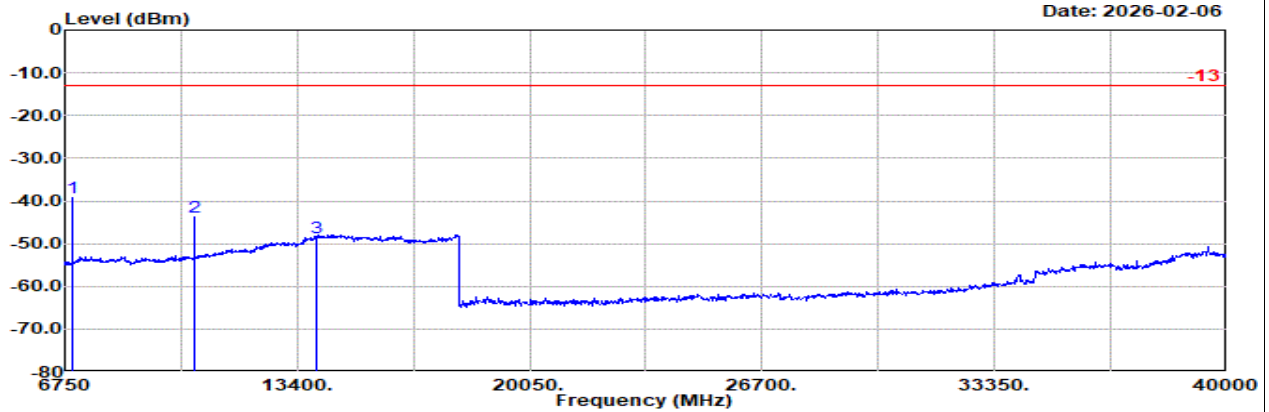

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	6965.00	-39.20	RMS	36.13	-21.59	2.01	-95.23	39.48	-13.00	-26.20	Horizontal	
2	10447.00	-43.84	RMS	37.20	-21.80	1.79	-95.23	34.20	-13.00	-30.84	Horizontal	
3	13929.00	-48.53	RMS	40.66	-22.26	2.22	-95.23	26.08	-13.00	-35.53	Horizontal	

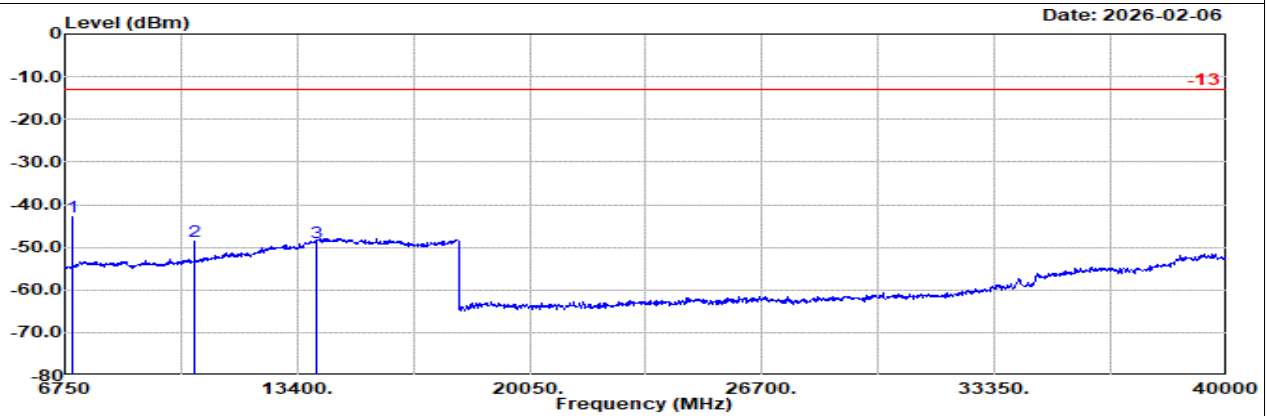

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	6965.00	-42.78	RMS	36.13	-21.59	2.01	-95.23	35.90	-13.00	-29.78	Vertical	
2	10447.00	-48.59	RMS	37.20	-21.80	1.79	-95.23	29.45	-13.00	-35.59	Vertical	
3	13929.00	-48.78	RMS	40.66	-22.26	2.22	-95.23	25.83	-13.00	-35.78	Vertical	




Ant. 8+9

Part 27Q Mode 15


EN-DC B5+n78 10M + 40M Ch20525 1RB0 QPSK + Ch635332 1RB1 BPSK

H

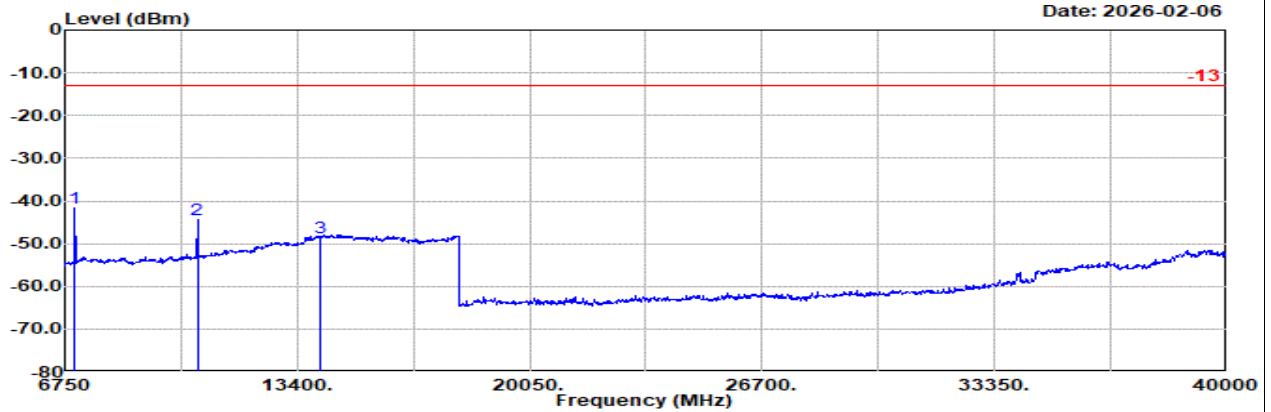

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch635332 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin		Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm			
1	7025.00	-41.77	RMS	36.15	-21.58	1.94	-95.23	36.95	-13.00	-28.77	Horizontal		
2	10537.00	-44.32	RMS	37.37	-21.82	1.81	-95.23	33.55	-13.00	-31.32	Horizontal		
3	14049.00	-48.47	RMS	40.80	-22.36	2.23	-95.23	26.09	-13.00	-35.47	Horizontal		

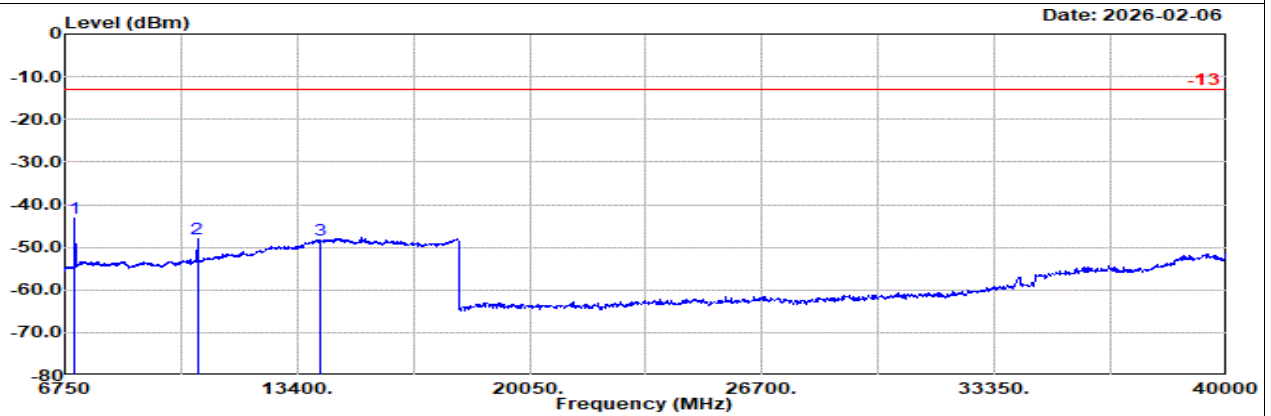

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n78 40M Ch635332 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin		Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm			
1	7025.00	-43.27	RMS	36.15	-21.58	1.94	-95.23	35.45	-13.00	-30.27	Vertical		
2	10537.00	-47.91	RMS	37.37	-21.82	1.81	-95.23	29.96	-13.00	-34.91	Vertical		
3	14049.00	-48.36	RMS	40.80	-22.36	2.23	-95.23	26.20	-13.00	-35.36	Vertical		




Ant. 8

Part 27H Mode 24

NR SA n12 15M Ch141300 1RB1 BPSK

L

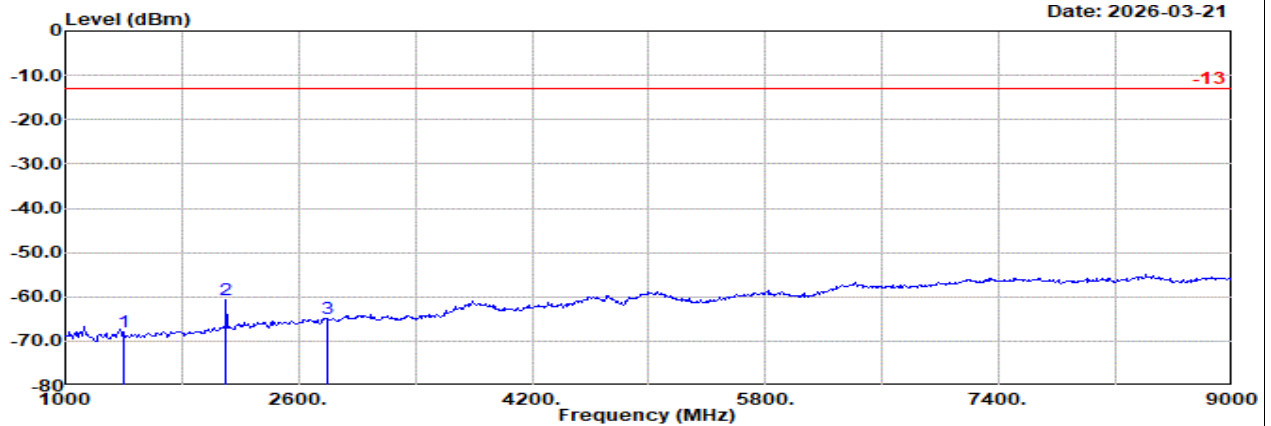


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1400.00	-68.05	RMS		24.40	-25.44	0.97	-95.23	27.25	-13.00	-55.05		Horizontal
2	2100.00	-60.68	RMS		26.30	-24.71	0.85	-95.23	32.12	-13.00	-47.68		Horizontal
3	2800.00	-64.78	RMS		27.70	-23.82	1.03	-95.23	25.54	-13.00	-51.78		Horizontal

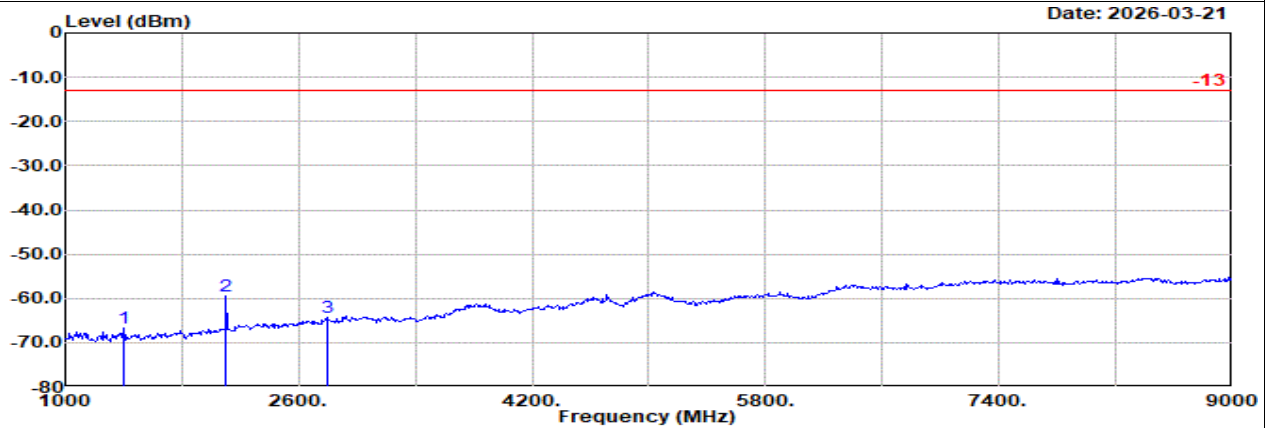

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1400.00	-66.69	RMS		24.40	-25.44	0.97	-95.23	28.61	-13.00	-53.69		Vertical
2	2100.00	-59.38	RMS		26.30	-24.71	0.85	-95.23	33.42	-13.00	-46.38		Vertical
3	2800.00	-64.37	RMS		27.70	-23.82	1.03	-95.23	25.95	-13.00	-51.37		Vertical




Ant. 8

Part 27H Mode 24

NR SA n12 15M Ch141500 1RB1 BPSK

M

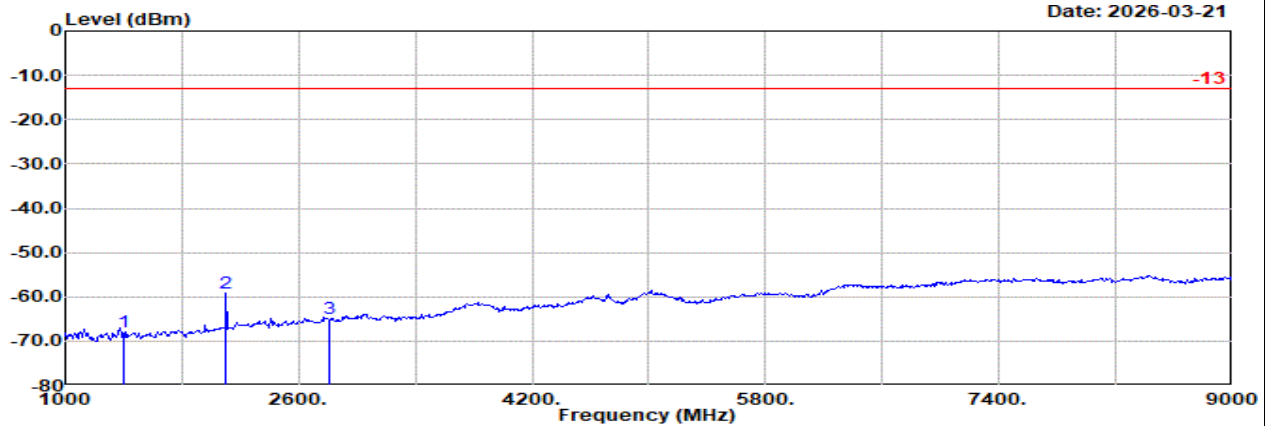


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n12 15M Ch141500 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1402.00	-67.81	RMS		24.42	-25.44	0.97	-95.23	27.47	-13.00	-54.81		Horizontal
2	2103.00	-59.21	RMS		26.30	-24.71	0.85	-95.23	33.58	-13.00	-46.21		Horizontal
3	2804.00	-64.82	RMS		27.70	-23.81	1.03	-95.23	25.49	-13.00	-51.82		Horizontal

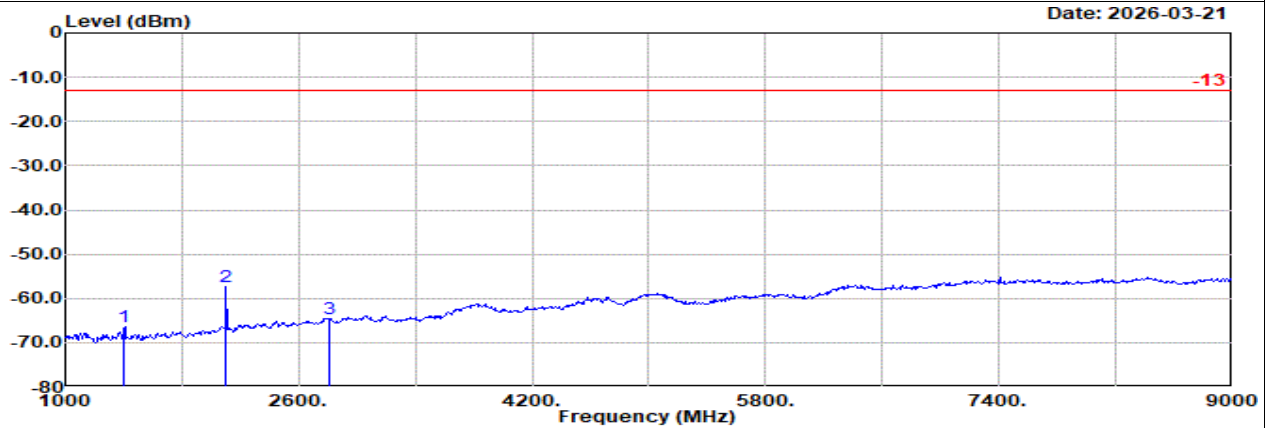

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n12 15M Ch141500 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1402.00	-66.56	RMS		24.42	-25.44	0.97	-95.23	28.72	-13.00	-53.56		Vertical
2	2103.00	-57.31	RMS		26.30	-24.71	0.85	-95.23	35.48	-13.00	-44.31		Vertical
3	2804.00	-64.67	RMS		27.70	-23.81	1.03	-95.23	25.64	-13.00	-51.67		Vertical




Ant. 8

Part 27H Mode 24

NR SA n12 15M Ch141700 1RB1 BPSK

H

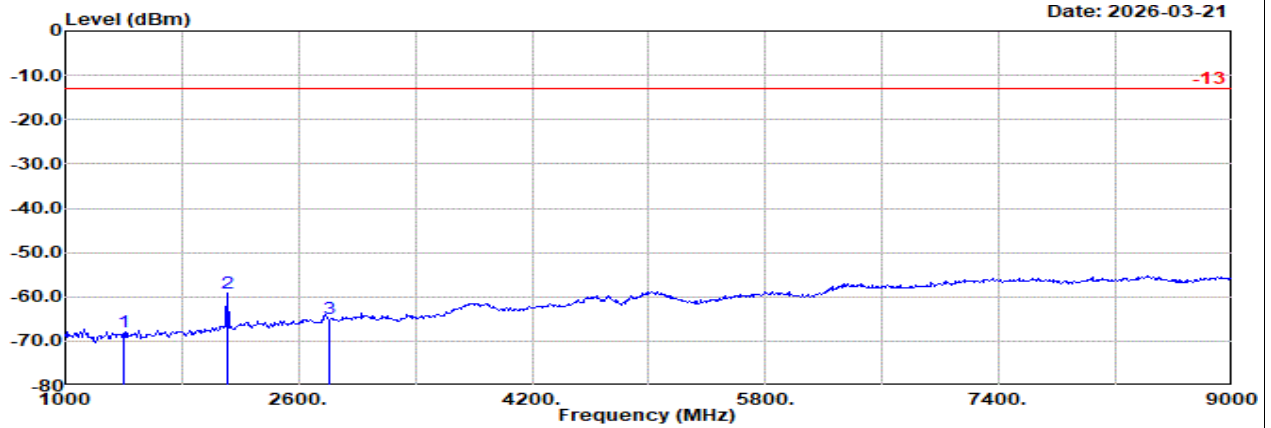


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n12 15M Ch141700 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Reading	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1404.00	-67.86	RMS		24.44	-25.43	0.97	-95.23	27.39	-13.00	-54.86		Horizontal
2	2106.00	-59.28	RMS		26.30	-24.70	0.85	-95.23	33.50	-13.00	-46.28		Horizontal
3	2808.00	-64.86	RMS		27.70	-23.81	1.02	-95.23	25.46	-13.00	-51.86		Horizontal

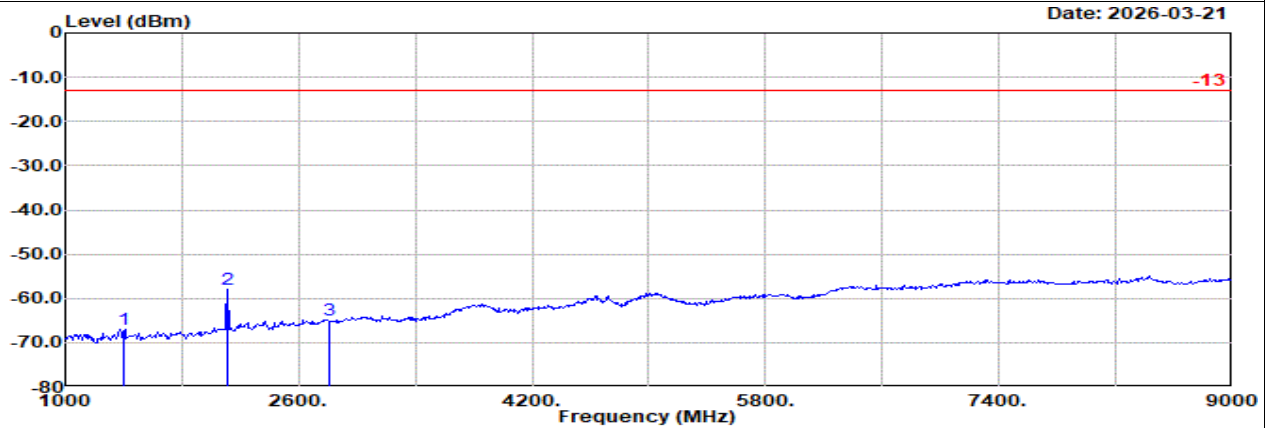

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n12 15M Ch141700 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Reading	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1404.00	-67.07	RMS		24.44	-25.43	0.97	-95.23	28.18	-13.00	-54.07		Vertical
2	2106.00	-57.99	RMS		26.30	-24.70	0.85	-95.23	34.79	-13.00	-44.99		Vertical
3	2808.00	-64.78	RMS		27.70	-23.81	1.02	-95.23	25.54	-13.00	-51.78		Vertical




Ant. 8

Part 90S Mode 1

NR SA n26 5M Ch163300 1RB1 BPSK

L

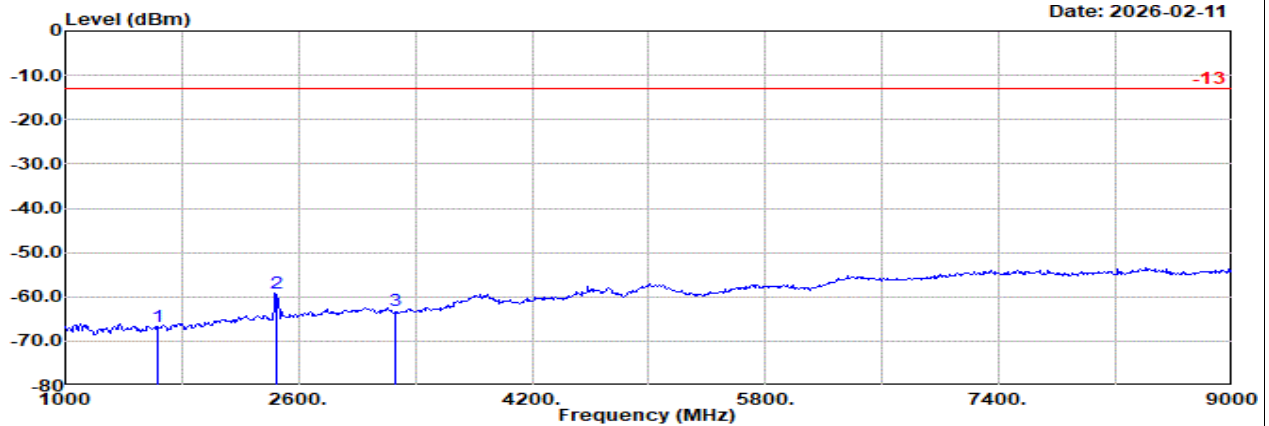


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 5M Ch163300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1629.00	-66.67	RMS		24.60	-25.15	1.07	-95.23	28.04	-13.00	-53.67		Horizontal
2	2444.00	-59.09	RMS		26.68	-24.25	0.91	-95.23	32.80	-13.00	-46.09		Horizontal
3	3258.00	-62.96	RMS		27.93	-23.81	1.05	-95.23	27.10	-13.00	-49.96		Horizontal

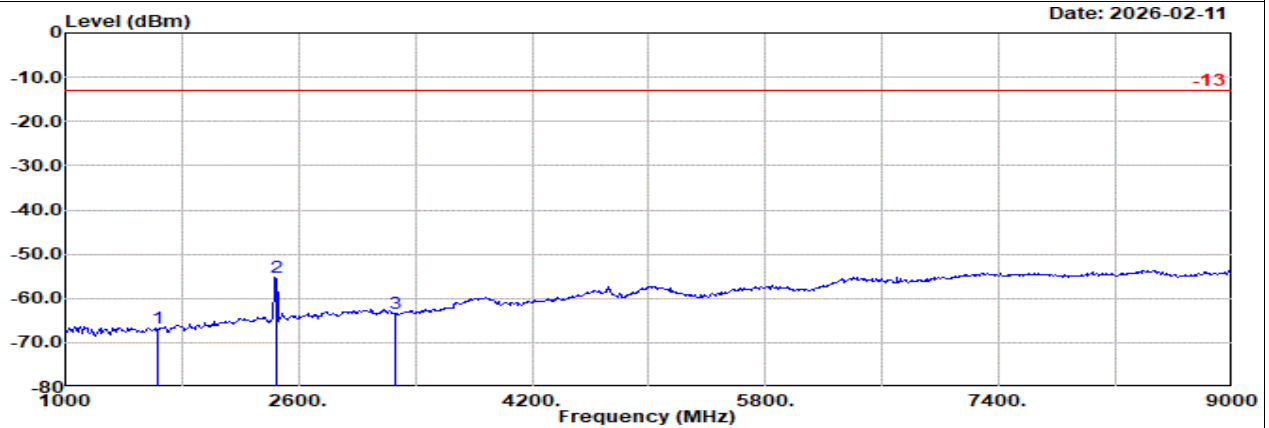

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 5M Ch163300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1629.00	-66.82	RMS		24.60	-25.15	1.07	-95.23	27.89	-13.00	-53.82		Vertical
2	2444.00	-55.14	RMS		26.68	-24.25	0.91	-95.23	36.75	-13.00	-42.14		Vertical
3	3258.00	-63.31	RMS		27.93	-23.81	1.05	-95.23	26.75	-13.00	-50.31		Vertical




Ant. 8

Part 90S Mode 1

NR SA n26 5M Ch163800 1RB1 BPSK

M

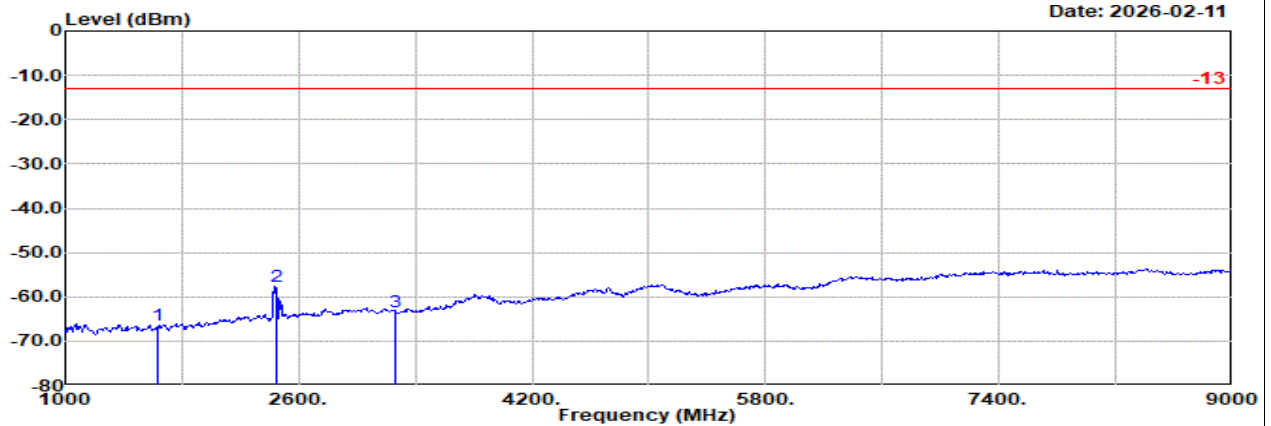


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1634.00	-66.47	RMS	24.64	-25.15	1.07	-95.23	28.20	-13.00	-53.47
2	2451.00	-57.62	RMS	26.79	-24.24	0.91	-95.23	34.15	-13.00	-44.62
3	3268.00	-63.41	RMS	27.97	-23.81	1.05	-95.23	26.61	-13.00	-50.41

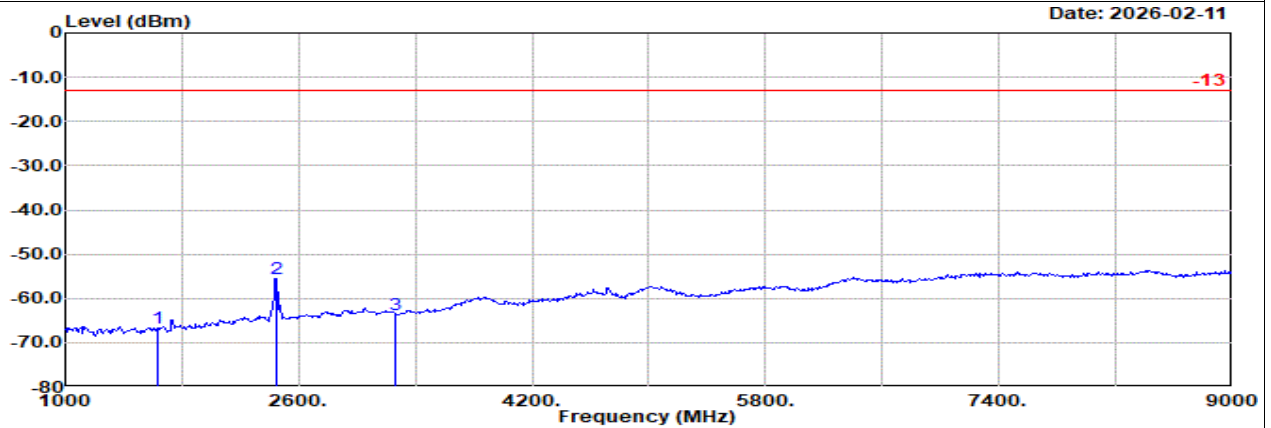

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 5M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1634.00	-66.77	RMS	24.64	-25.15	1.07	-95.23	27.90	-13.00	-53.77
2	2451.00	-55.47	RMS	26.79	-24.24	0.91	-95.23	36.30	-13.00	-42.47
3	3268.00	-63.55	RMS	27.97	-23.81	1.05	-95.23	26.47	-13.00	-50.55




Ant. 8

Part 90S Mode 1

NR SA n26 5M Ch164300 1RB1 BPSK

H

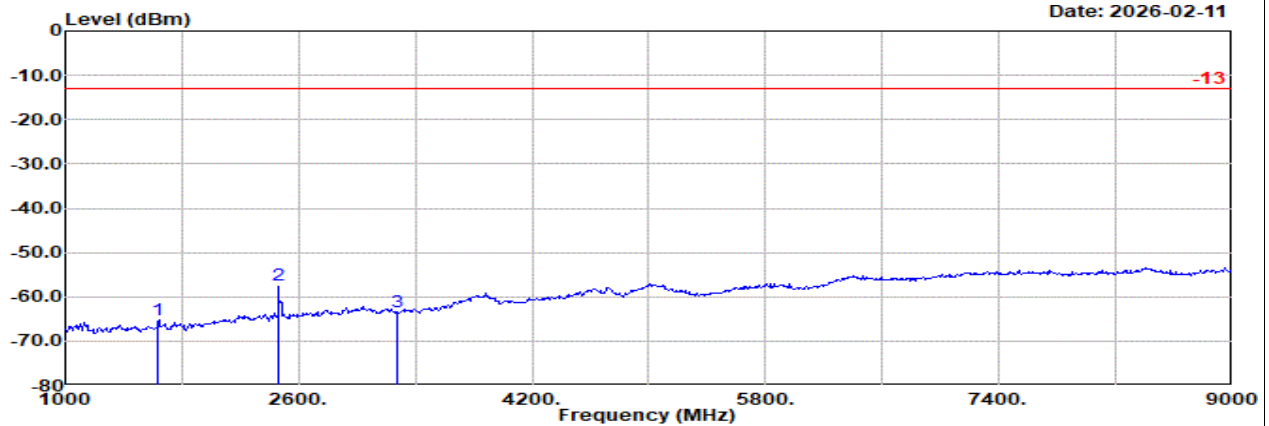


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n26 5M Ch164300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1639.00	-65.34	RMS	24.69	-25.14	1.07	-95.23	29.27	-13.00	-52.34		Horizontal
2	2459.00	-57.36	RMS	26.71	-24.23	0.91	-95.23	34.48	-13.00	-44.36		Horizontal
3	3278.00	-63.41	RMS	28.01	-23.82	1.05	-95.23	26.58	-13.00	-50.41		Horizontal

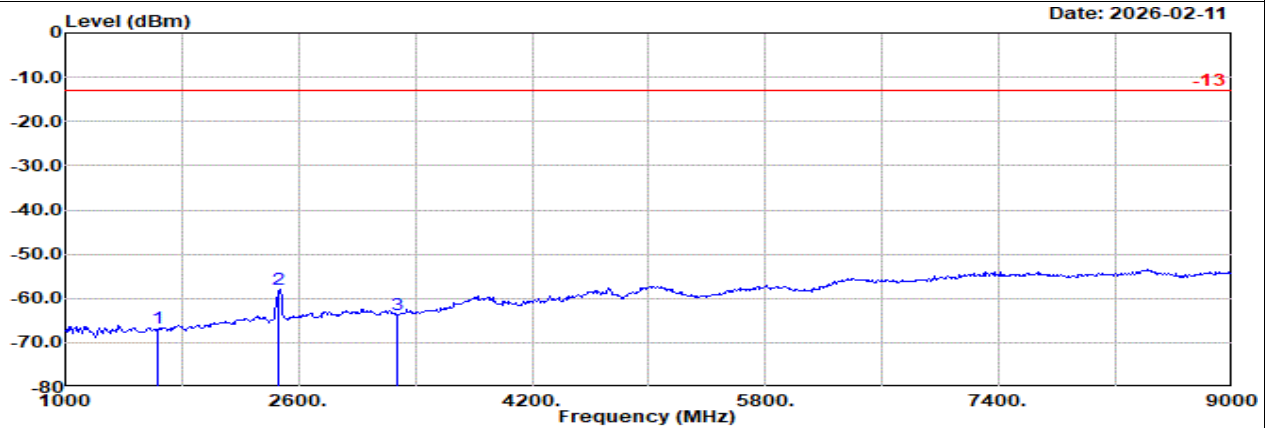

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n26 5M Ch164300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1639.00	-66.75	RMS	24.69	-25.14	1.07	-95.23	27.86	-13.00	-53.75		Vertical
2	2459.00	-57.95	RMS	26.71	-24.23	0.91	-95.23	33.89	-13.00	-44.95		Vertical
3	3278.00	-63.70	RMS	28.01	-23.82	1.05	-95.23	26.29	-13.00	-50.70		Vertical




Ant. 8

Part 90S Mode 2

NR SA n26 10M Ch163800 1RB1 BPSK

M

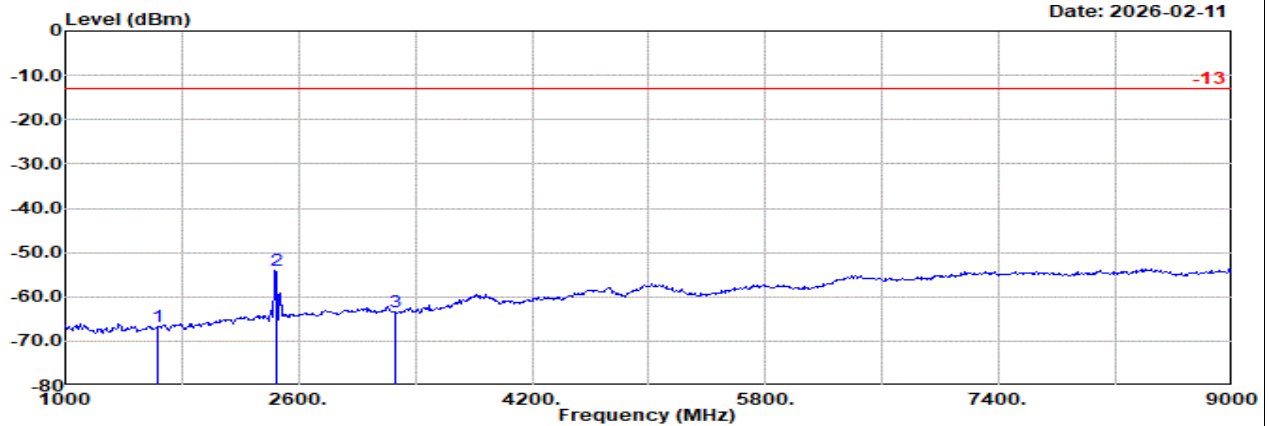


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 10M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1630.00	-66.60	RMS	24.60	-25.15	1.07	-95.23	28.11	-13.00	-53.60		Horizontal
2	2444.00	-54.14	RMS	26.68	-24.25	0.91	-95.23	37.75	-13.00	-41.14		Horizontal
3	3259.00	-63.25	RMS	27.94	-23.81	1.05	-95.23	26.80	-13.00	-50.25		Horizontal

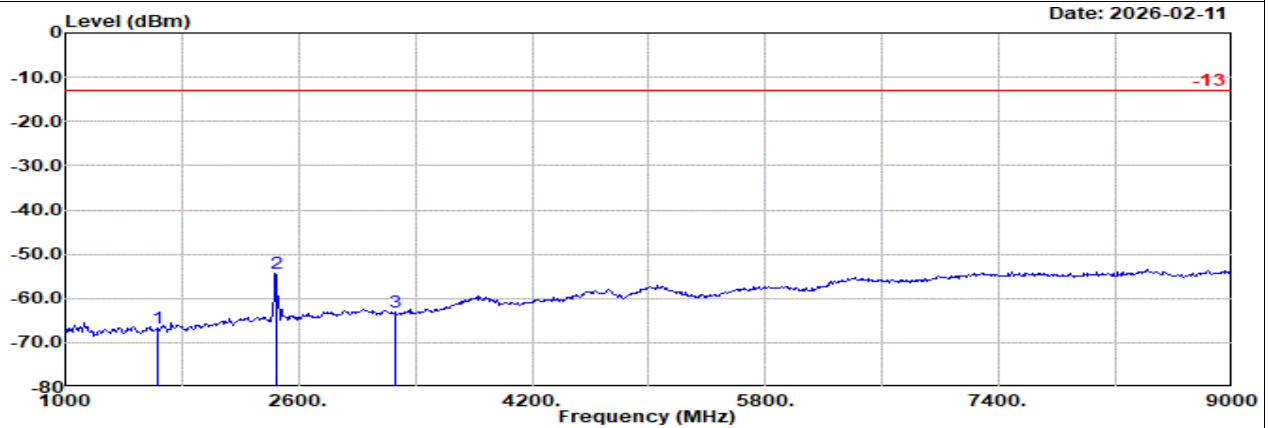

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 10M Ch163800 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	1630.00	-66.78	RMS	24.60	-25.15	1.07	-95.23	27.93	-13.00	-53.78		Vertical
2	2444.00	-54.38	RMS	26.68	-24.25	0.91	-95.23	37.51	-13.00	-41.38		Vertical
3	3259.00	-63.18	RMS	27.94	-23.81	1.05	-95.23	26.87	-13.00	-50.18		Vertical




Ant. 8+1

Part 27M Mode 7


EN-DC B5+n7 10M + 25M Ch20525 1RB0 QPSK + Ch502500 1RB1 BPSK

L

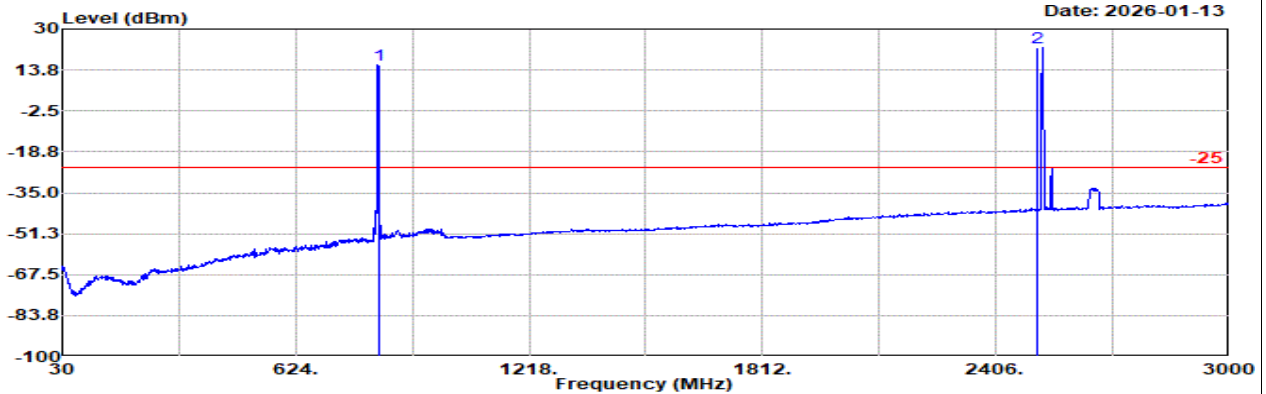

Site : 03CH21-HY
Condition: -25 3m LF_63303&001_251126 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 30M Ch534996 1RB1 BPSK
: #1 is fundamental signal which can be ignored.
: #2 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	836.50	16.00	RMS	28.78	5.09	0.00	-95.23	77.36	-25.00	41.00	Horizontal
2	2512.50	22.51	RMS	26.83	8.74	0.00	-95.23	82.18	-25.00	47.51	Horizontal

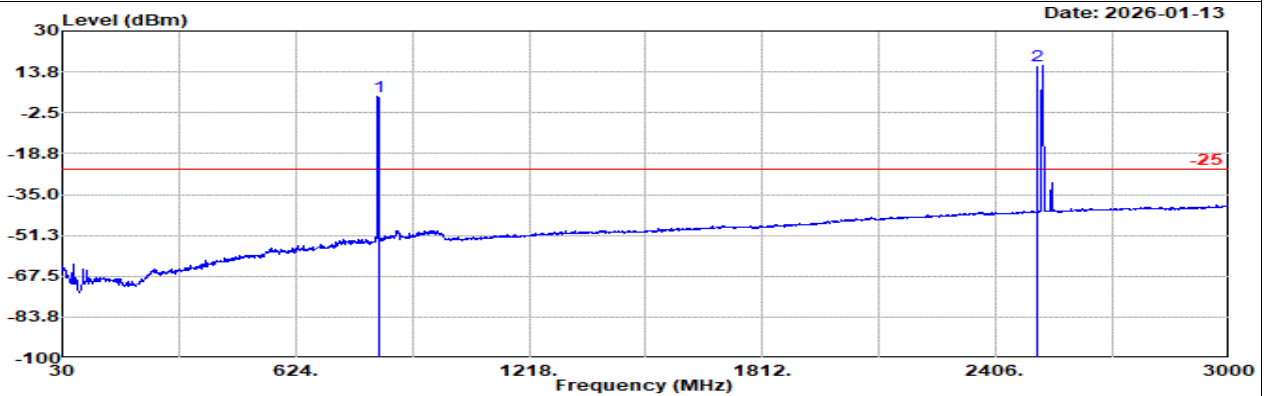

Site : 03CH21-HY
Condition: -25 3m LF_63303&001_251126 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 30M Ch534996 1RB1 BPSK
: #1 is fundamental signal which can be ignored.
: #2 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	836.50	4.15	RMS	28.78	5.09	0.00	-95.23	65.51	-25.00	29.15	Vertical
2	2512.50	16.46	RMS	26.83	8.74	0.00	-95.23	76.13	-25.00	41.46	Vertical