



FCC RADIO TEST REPORT

FCC ID : UZ7TC101B
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC101B
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC 47 CFR Part 2, 96

The product was received on Nov. 28, 2025 and testing was performed from Jan. 03, 2026 to Apr. 20, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Items.....	12
3.1 Measuring Instruments	12
3.2 Conducted Output Power Measurement	13
3.3 Peak-to-Average Ratio	14
3.4 EIRP	15
3.5 Occupied Bandwidth.....	16
3.6 Conducted Band Edge	17
3.7 Conducted Spurious Emission	18
3.8 Frequency Stability	19
4 Radiated Test Items	20
4.1 Measuring Instruments	20
4.2 Radiated Spurious Emission Measurement	22
5 List of Measuring Equipment.....	23
6 Measurement Uncertainty	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG5N2836E	01	Initial issue of report	Mar. 10, 2026
FG5N2836E	02	Revised SW Version and Increase Conducted Data. This report is an updated version, replacing the report issued on Mar. 12, 2026.	Mar. 18, 2026
FG5N2836E	03	Revised Frequency List of Low/Middle/High Channels and Appendix A1 and List of Measuring Equipment. This report is an updated version, replacing the report issued on Mar. 18, 2026.	Apr. 21, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
3.3	§96.41	Peak-to-Average Ratio	Pass	-
3.4	§96.41	Effective Isotropic Radiated Power	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Pass	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.2	§2.1053 §96.41	Radiated Spurious Emission	Pass	-3.7 dB under the limit at 7215 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Julia Chang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC101B
FCC ID	UZ7TC101B
Sample 1	no Scan engine
Sample 2	no Scan engine (Data only)
Sample 3	Scan engine (SE4100)
Sample 4	Scan engine (SR560), White Illum, Red Laser
Sample 5	Scan engine (SR500), Red Illum, Yellow LED Aimer
EUT supports Radios application	GSM/WCDMA/HSPA/LTE/5G NR/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE BDS/Galileo/GLONASS/GPS
HW Version	EV
SW Version	15-13-05.00-VG-U00-PRD-NEM-04
MFD	12NOV25
EUT Stage	Identical Prototype

Support band and evaluated information	
Supported band	n77, n78
Evaluated and Tested band	n77
Band covered information	Wider operating frequency band range covers narrower one when the power is worse as follows: ■ n77 cover n78 (Part 96)

FDD/TDD band Power Class				
	PC3	PC2		
N77	V			
N78	V			

Antenna information									
Band	Ant 1	Ant 8	Ant 9					Main Ant. #	
N77			-0.16					9	
N78			-0.16					9	

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.



Specification of Accessories				
Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Adapter 2	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Battery 1 (1x)	Brand Name	Zebra	Part Number	BT-000473-0020
Battery 2 (1.5x)	Brand Name	Zebra	Part Number	BT-000473-0820
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TN28USBC2C-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-02
HS2100 rugged wired headset	Brand Name	Zebra	Part Number	HS2100-BTN-LSB
HS2100 standard cable	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
HS3100 rugged Bluetooth headset	Brand Name	Zebra	Part Number	HS3100-OTH
USB-C to 3.5mm adapter cable	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
Handstrap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Trigger Handle	Brand Name	Zebra	Part Number	CRG-TC2L-SNP1-01
Arm Mounts	Brand Name	Zebra	Part Number	SG-TC2L-ARMNT-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01
Rugged boot	Brand Name	Zebra	Part Number	SG-TCVT-BOOT-01

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH21-HY
Test Engineer	Kelvin Lu / Mike Yeh / Ching Chen / Luffy Lin	Jack Cheng, Ray Lung, Sky Chang
Temperature (°C)	20.8~23.6	18~26
Relative Humidity (%)	51.3~57.4	50~70

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Modulation Type	Modulation
A	DFT-s-OFDM pi/2 BPSK
B	DFT-s-OFDM QPSK
C	DFT-s-OFDM 16QAM
D	DFT-s-OFDM 64QAM
E	DFT-s-OFDM 256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D, E	All	1, Half, Full	L, M, H
EIRP	A, B, C, D, E	All	1, Half, Full	L, M, H
PAR	A, B, C, D, E	20 MHz	Outer_Full	M
Bandwidth	A, B, C	All	Outer_Full	M
Mask	A, B	All	Outer_1RB Outer_Full	L, M, H
CSE	B	10 MHz	Inner_1RB	L, M, H
Frequency Stability	A	10 MHz	Outer_Full	M
RSE	A	Maximum or less	Inner_1RB	L, M, H
Remark: 1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types. 2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported. 3. One representative bandwidth is selected to perform frequency stability.				

2.2 Connection Diagram of Test System

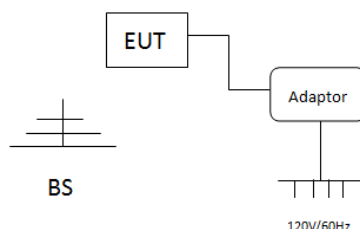

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	N/A
2.	Base Station	Anritsu	MT8000A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	640000	641666	643332
	Frequency	3600	3624.99	3649.98
90	Channel	639668	641666	643666
	Frequency	3595.02	3624.99	3654.99
80	Channel	639334	641666	644000
	Frequency	3590.01	3624.99	3660
70	Channel	639000	641666	644332
	Frequency	3585	3624.99	3664.98
60	Channel	638668	641666	644666
	Frequency	3580.02	3624.99	3669.99
50	Channel	638334	641666	645000
	Frequency	3575.01	3624.99	3675
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98



5G NR n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	640000	641666	643332
	Frequency	3600	3624.99	3649.98
90	Channel	639668	641666	643666
	Frequency	3595.02	3624.99	3654.99
80	Channel	639000	641666	644332
	Frequency	3585	3624.99	3664.98
70	Channel	639000	641666	644332
	Frequency	3585	3624.99	3664.98
60	Channel	638668	641666	644666
	Frequency	3580.02	3624.99	3669.99
50	Channel	638334	641666	645000
	Frequency	3575.01	3624.99	3675
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

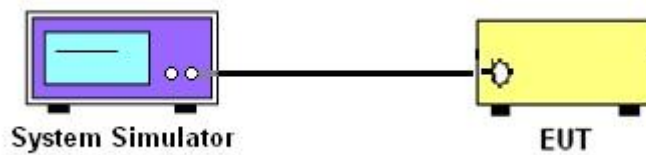

3.1.3 EIRP, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, and Conducted Spurious Emission

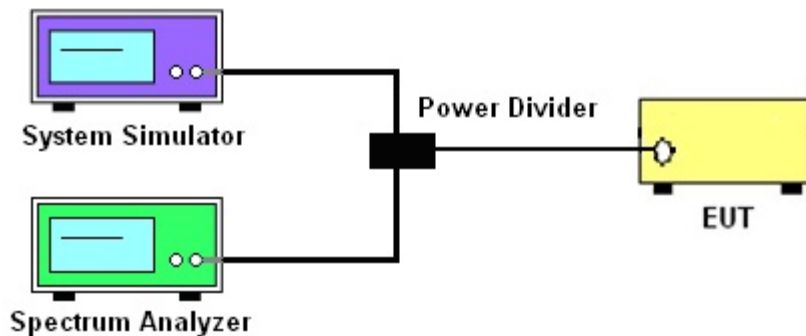

3.1.4 Frequency Stability

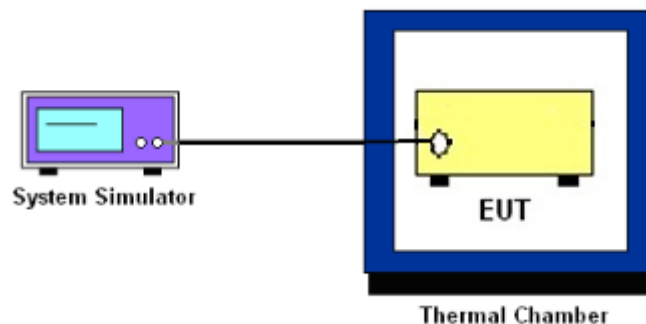

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 EIRP

3.4.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5.

According to KDB 412172 D01 Power Approach,

$EIRP = PT + GT - LC$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a
Category A CBSD	30	20
Category B CBSD	47	37

Remark: Total channel power is complied with EIRP limit 23dBm/10MHz.

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
3. The measured ACLR ratio shall be at least 30 dB.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.
10. The test reduction is applied to 1RB case for 10MHz Bandwidth to cover the all operation bandwidths. RBW 500kHz is applied to the 0-1MHz offset from the edge of the frequency block group for 1RB mode in order to represent the worst case condition.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

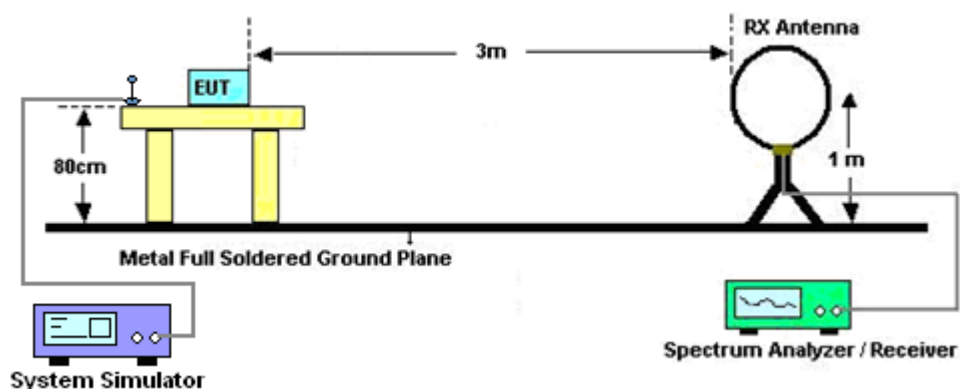


For radiated test from 30MHz to 1GHz

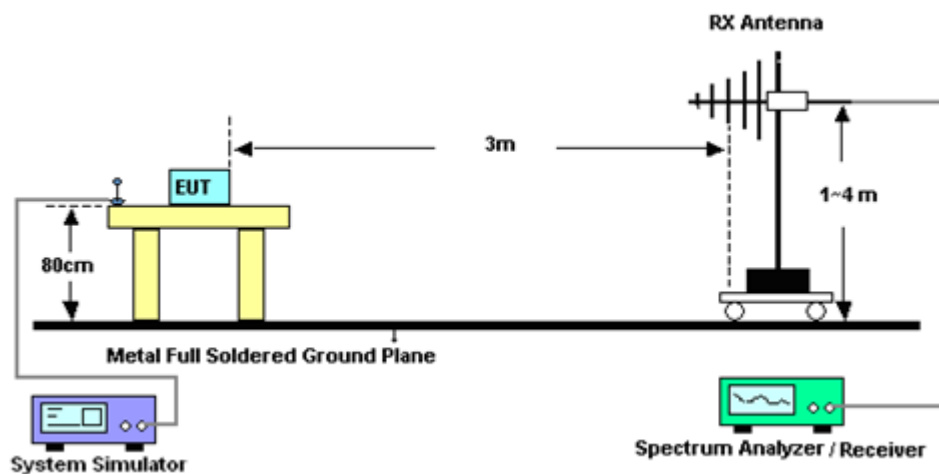

For radiated test from 1GHz to 18GHz

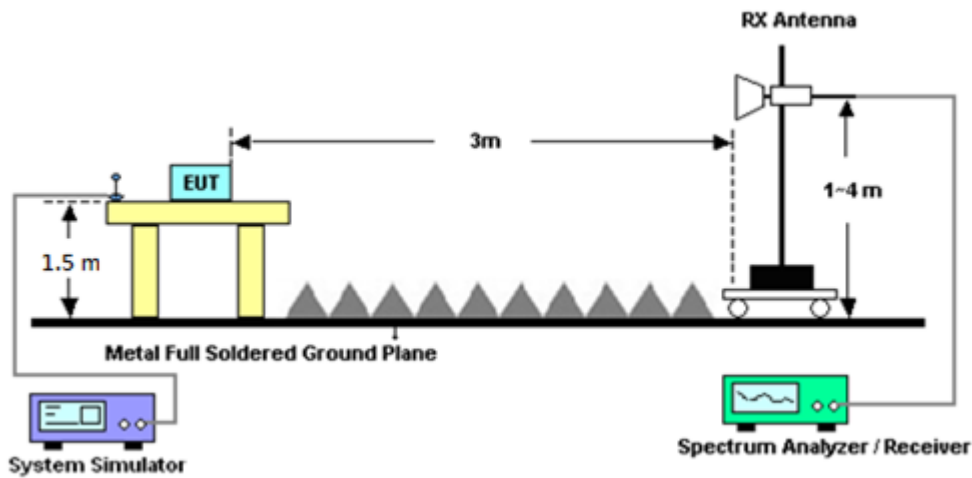

For radiated test above 18GHz

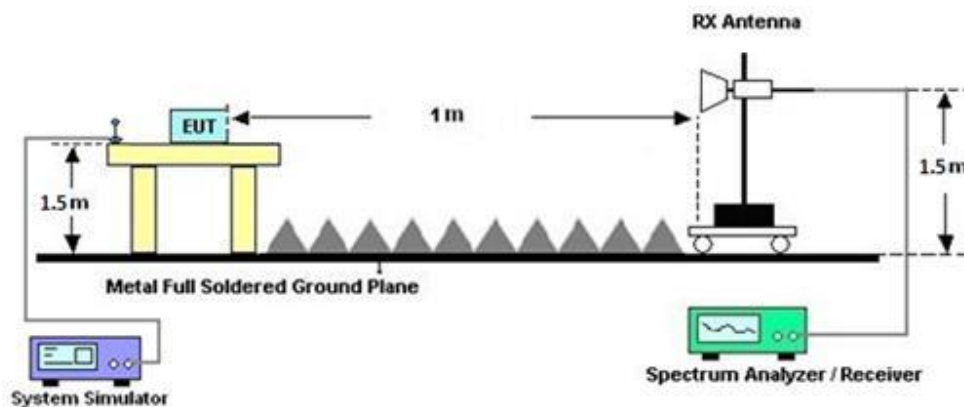

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7.
$$\text{Field Strength Level (dBm)} = \text{Spectrum Reading (dBm)} + \text{Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamplifier Factor}.$$
8.
$$\text{ERP (dBm)} = \text{EIRP (dBm)} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Mar. 05, 2026	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Nov. 26, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Nov. 25, 2026	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18E N	1GHz~18GHz	Aug. 07, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Aug. 06, 2026	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Jul. 01, 2026	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 13, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Jul. 12, 2026	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 26, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Sep. 25, 2026	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Aug. 25, 2026	Radiation (03CH21-HY)
EXA Signal Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 09, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Sep. 08, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 11, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Aug. 10, 2026	Radiation (03CH21-HY)
RF Cable	EMCI	EMC101Y-KM-KM-1000	240906	30MHz~40GHz	Oct. 21, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2025	Jan. 20, 2026 ~ Mar. 03, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 20, 2026 ~ Mar. 03, 2026	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 20, 2026 ~ Mar. 03, 2026	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 20, 2026 ~ Mar. 03, 2026	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jan. 20, 2026 ~ Mar. 03, 2026	N/A	Radiation (03CH21-HY)
DC Power Supply	GW Instek	GPE2323	GET910896	0V~64V ;0A~6A	Dec. 15, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Dec. 14, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101544	10Hz~44GHz	Aug. 18, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Aug. 17, 2026	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92003713	-30°C ~95°C	May. 12, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	May. 11, 2026	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	NA	Nov. 04, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Base Station (Measure)	Anritsu	MT8821C	6261849015	LTE	Jan. 03, 2026	Jan. 03, 2026 ~ Apr. 20, 2026	Jan. 02, 2027	Conducted (TH05-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Jan. 02, 2026	Jan. 03, 2026 ~ Apr. 20, 2026	Jan. 01, 2027	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	Anritsu	MG3710A	6261943042	8MHz~40GHz	May. 22, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	May. 21, 2026	Conducted (TH05-HY)
5G Wireless Test Platform	Keysight	E7515B	MY59321826	FR1	Jun. 12, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Jun. 11, 2026	Conducted (TH05-HY)
Power divider	Anritsu	K241C	2143398	9KHz~40GHz	Jun. 13, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Jun. 13, 2026	Conducted (TH05-HY)
RF Cable	MVE	MCBL-LL403P.50	E80002C	9KHz~40GHz	Aug. 01, 2025	Jan. 03, 2026 ~ Apr. 20, 2026	Jul. 31, 2026	Conducted (TH05-HY)
Software 1	Sporton	FCC 5GNR_FSV30 44_20231106	N/A	Conducted Test Item	N/A	Jan. 03, 2026 ~ Apr. 20, 2026	N/A	Conducted (TH05-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
---	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
---	---------

Appendix A. Test Results of Conducted Test

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	19.03	18.93	18.69	21.68	0.1472		
10	1	22		18.92	19.01	18.49				
10	12	6		19.05	19.08	18.65				
10	1	0		18.49	18.37	18.17				
10	1	23		18.45	18.54	17.86				
10	24	0		11.55	11.51	11.11				
10	1	1	QPSK	21.99	21.95	21.70				
10	1	22		21.98	22.04	21.51				
10	12	6		22.03	22.09	21.67				
10	1	0		18.45	18.41	18.14				
10	1	23		18.40	18.52	17.96				
10	24	0		10.53	10.51	10.12				
10	1	1	16-QAM	20.79	20.77	20.64	20.38	0.1091		
10	1	1	64-QAM	19.39	19.36	19.18				
10	1	1	256-QAM	17.47	17.65	17.27				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	19.03	18.94	18.68	21.74	0.1493		
15	1	36		18.96	19.07	18.49				
15	18	9		19.09	19.15	18.72				
15	1	0		18.52	18.43	18.21				
15	1	37		18.43	18.58	17.87				
15	36	0		11.61	11.54	11.16				
15	1	1	QPSK	22.00	21.93	21.73				
15	1	36		22.01	22.12	21.52				
15	18	9		22.13	22.15	21.76				
15	1	0		18.54	18.41	18.20				
15	1	37		18.45	18.61	17.91				
15	36	0		10.60	10.53	10.16				
15	1	1	16-QAM	20.98	20.77	20.60	20.57	0.1140		
15	1	1	64-QAM	19.56	19.52	19.32				
15	1	1	256-QAM	17.65	17.52	17.36				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	19.16	19.05	18.66	21.78	0.1507		
20	1	49		18.96	19.04	18.40				
20	25	12		19.11	19.10	18.76				
20	1	0		18.73	18.54	18.10				
20	1	50		18.45	18.57	17.92				
20	50	0		11.48	11.58	11.11				
20	1	1	QPSK	22.19	22.06	21.69				
20	1	49		21.98	22.04	21.45				
20	25	12		22.13	22.11	21.79				
20	1	0		18.71	18.52	18.18				
20	1	50		18.49	18.58	17.87				
20	50	0		10.51	10.56	10.14				
20	1	1	16-QAM	21.09	20.93	20.61	20.68	0.1169		
20	1	1	64-QAM	19.73	19.50	19.16				
20	1	1	256-QAM	17.84	17.64	17.28				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	19.04	19.03	18.80	21.72	0.1486		
30	1	76		19.09	19.03	18.78				
30	36	18		18.99	19.08	18.78				
30	1	0		18.58	18.49	18.19				
30	1	77		18.54	18.49	18.00				
30	75	0		11.43	11.51	11.19				
30	1	1	QPSK	22.03	22.02	21.67				
30	1	76		22.07	22.05	21.51				
30	36	18		21.96	22.13	21.77				
30	1	0		18.55	18.52	18.20				
30	1	77		18.58	18.56	18.03				
30	75	0		10.45	10.53	10.18				
30	1	1	16-QAM	20.92	20.86	20.61	20.51	0.1125		
30	1	1	64-QAM	19.54	19.45	19.26				
30	1	1	256-QAM	17.58	17.58	17.27				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	19.29	19.21	18.66	21.89	0.1545		
40	1	104		19.27	19.00	18.54				
40	50	25		19.14	19.13	18.69				
40	1	0		18.80	18.71	17.97				
40	1	105		18.82	18.47	18.12				
40	100	0		11.60	11.54	11.10				
40	1	1	QPSK	22.30	22.20	21.64				
40	1	104		22.26	22.00	21.54				
40	50	25		22.12	22.14	21.70				
40	1	0		18.80	18.71	18.14				
40	1	105		18.82	18.43	18.02				
40	100	0		10.55	10.56	10.10				
40	1	1	16-QAM	21.19	21.02	20.53	20.78	0.1197		
40	1	1	64-QAM	19.75	19.67	19.09				
40	1	1	256-QAM	17.83	17.90	17.22				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	18.87	18.93	18.43	21.52	0.1419		
50	1	131		18.78	18.48	18.16				
50	64	32		18.84	18.90	18.42				
50	1	0		18.35	18.38	17.90				
50	1	132		18.26	17.86	17.62				
50	128	0		11.29	11.30	10.81				
50	1	1	QPSK	21.88	21.93	21.44				
50	1	131		21.78	21.50	21.20				
50	64	32		21.87	21.86	21.39				
50	1	0		18.36	18.45	17.89				
50	1	132		18.26	17.93	17.64				
50	128	0		10.24	10.24	9.78				
50	1	1	16-QAM	20.75	20.79	20.34	20.38	0.1091		
50	1	1	64-QAM	19.49	19.53	18.94				
50	1	1	256-QAM	17.46	17.54	16.91				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	18.45	18.48	18.16	21.55	0.1429		
60	1	160		18.83	18.47	18.31				
60	81	40		18.93	18.84	18.46				
60	1	0		17.88	17.92	17.61				
60	1	161		18.39	18.02	17.83				
60	162	0		11.24	11.19	10.85				
60	1	1	QPSK	21.46	21.49	21.20				
60	1	160		21.83	21.49	21.36				
60	81	40		21.96	21.89	21.46				
60	1	0		17.90	17.93	17.57				
60	1	161		18.38	18.07	17.87				
60	162	0		10.26	10.17	9.83				
60	1	1	16-QAM	20.34	20.42	20.04	20.01	0.1002		
60	1	1	64-QAM	18.88	19.07	18.74				
60	1	1	256-QAM	17.03	17.06	16.83				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	18.94	19.08	18.83	21.68	0.1472		
70	1	187		18.66	18.25	18.08				
70	90	45		18.91	18.93	18.45				
70	1	0		18.40	18.56	18.35				
70	1	188		18.16	17.78	17.60				
70	180	0		11.29	11.29	10.94				
70	1	1	QPSK	21.92	22.09	21.82				
70	1	187		21.72	21.26	21.03				
70	90	45		21.94	21.94	21.45				
70	1	0		18.40	18.56	18.33				
70	1	188		18.18	17.72	17.58				
70	180	0		10.27	10.25	9.95				
70	1	1	16-QAM	20.83	20.89	20.72	20.48	0.1117		
70	1	1	64-QAM	19.29	19.51	19.40				
70	1	1	256-QAM	17.57	17.63	17.40				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	18.88	18.99	18.64	21.57	0.1435		
80	1	215		18.75	18.15	18.16				
80	108	54		18.92	18.87	18.43				
80	1	0		18.35	18.44	18.06				
80	1	216		18.21	17.66	17.64				
80	216	0		11.27	11.23	10.88				
80	1	1	QPSK	21.89	21.97	21.62				
80	1	215		21.72	21.16	21.10				
80	108	54		21.98	21.86	21.42				
80	1	0		18.37	18.51	18.14				
80	1	216		18.21	17.63	17.64				
80	216	0		10.30	10.17	9.90				
80	1	1	16-QAM	20.69	20.87	20.58	20.46	0.1112		
80	1	1	64-QAM	19.22	19.43	19.21				
80	1	1	256-QAM	17.51	17.58	17.26				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	18.82	18.92	18.63	21.51	0.1416		
90	1	243		18.74	18.19	18.05				
90	120	60		18.85	18.87	18.60				
90	1	0		18.32	18.37	18.12				
90	1	244		18.29	17.76	17.62				
90	243	0		11.24	11.16	10.98				
90	1	1	QPSK	21.78	21.92	21.67				
90	1	243		21.82	21.21	21.04				
90	120	60		21.75	21.90	21.60				
90	1	0		18.24	18.40	18.17				
90	1	244		18.30	17.68	17.64				
90	243	0		10.24	10.18	10.00				
90	1	1	16-QAM	20.64	20.80	20.52	20.39	0.1094		
90	1	1	64-QAM	19.33	19.35	19.13				
90	1	1	256-QAM	17.38	17.52	17.28				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n77_Part96 Maximum Average Power [dBm] (GT - LC = -0.41 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	18.83	18.85	18.76	21.46	0.1400		
100	1	271		18.51	18.31	18.26				
100	135	67		18.89	18.83	18.61				
100	1	0		18.34	18.32	18.23				
100	1	272		18.00	17.81	17.73				
100	270	0		11.25	11.14	10.98				
100	1	1	QPSK	21.85	21.84	21.79				
100	1	271		21.52	21.29	21.18				
100	135	67		21.80	21.87	21.56				
100	1	0		18.36	18.34	18.28				
100	1	272		18.02	17.84	17.73				
100	270	0		10.25	10.14	9.99				
100	1	1	16-QAM	20.64	20.69	20.65	20.28	0.1067		
100	1	1	64-QAM	19.21	19.35	19.33				
100	1	1	256-QAM	17.42	17.48	17.28				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	19.00	18.68	18.50	21.65	0.1462		
10	1	22		19.00	18.68	18.51				
10	12	6		19.09	18.76	18.57				
10	1	0		18.58	18.22	18.03				
10	1	23		18.42	18.19	17.99				
10	24	0		11.47	11.23	10.94				
10	1	1	QPSK	21.99	21.72	21.56				
10	1	22		22.01	21.73	21.54				
10	12	6		22.08	21.72	21.63				
10	1	0		18.50	18.22	18.08				
10	1	23		18.42	18.20	17.98				
10	24	0		10.49	10.21	9.95				
10	1	1	16-QAM	21.00	20.64	20.47	20.57	0.1140		
10	1	1	64-QAM	19.46	19.21	19.00				
10	1	1	256-QAM	17.58	17.24	17.04				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	19.10	18.84	18.50	21.71	0.1483		
15	1	36		19.01	18.80	18.53				
15	18	9		19.13	18.82	18.61				
15	1	0		18.57	18.32	17.96				
15	1	37		18.47	18.25	18.02				
15	36	0		11.44	11.18	10.98				
15	1	1	QPSK	22.14	21.78	21.51				
15	1	36		22.02	21.77	21.56				
15	18	9		22.14	21.80	21.62				
15	1	0		18.52	18.27	17.95				
15	1	37		18.47	18.30	17.99				
15	36	0		10.46	10.16	9.96				
15	1	1	16-QAM	21.06	20.66	20.50	20.63	0.1156		
15	1	1	64-QAM	19.57	19.25	19.03				
15	1	1	256-QAM	17.67	17.33	17.09				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	19.10	18.86	18.34	21.70	0.1479		
20	1	49		18.98	18.79	18.51				
20	25	12		19.11	18.85	18.58				
20	1	0		18.61	18.34	17.80				
20	1	50		18.52	18.36	18.03				
20	50	0		11.45	11.19	10.90				
20	1	1	QPSK	22.08	21.82	21.29				
20	1	49		22.02	21.82	21.47				
20	25	12		22.13	21.81	21.58				
20	1	0		18.60	18.37	17.82				
20	1	50		18.50	18.31	18.01				
20	50	0		10.54	10.21	9.91				
20	1	1	16-QAM	21.12	20.63	20.25	20.69	0.1172		
20	1	1	64-QAM	19.69	19.32	18.89				
20	1	1	256-QAM	17.72	17.44	16.91				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	19.14	18.96	18.40	21.71	0.1483		
30	1	76		18.92	18.83	18.58				
30	36	18		19.06	18.83	18.41				
30	1	0		18.56	18.43	17.87				
30	1	77		18.36	18.33	18.08				
30	75	0		11.35	11.22	10.92				
30	1	1	QPSK	22.14	21.97	21.38				
30	1	76		21.92	21.91	21.59				
30	36	18		22.04	21.78	21.45				
30	1	0		18.60	18.42	17.91				
30	1	77		18.39	18.36	18.02				
30	75	0		10.38	10.20	9.89				
30	1	1	16-QAM	21.01	20.84	20.25	20.58	0.1143		
30	1	1	64-QAM	19.64	19.39	18.98				
30	1	1	256-QAM	17.66	17.47	16.96				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	19.26	19.15	18.60	21.86	0.1535		
40	1	104		19.09	18.97	18.54				
40	50	25		19.05	18.85	18.39				
40	1	0		18.77	18.62	18.11				
40	1	105		18.66	18.48	18.04				
40	100	0		11.53	11.26	10.80				
40	1	1	QPSK	22.29	22.11	21.65				
40	1	104		22.19	21.92	21.61				
40	50	25		22.09	21.82	21.35				
40	1	0		18.75	18.62	18.14				
40	1	105		18.62	18.44	18.09				
40	100	0		10.52	10.26	9.78				
40	1	1	16-QAM	21.26	21.08	20.61	20.83	0.1211		
40	1	1	64-QAM	19.80	19.69	19.15				
40	1	1	256-QAM	17.84	17.75	17.19				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	18.91	18.83	18.51	21.45	0.1396		
50	1	131		18.71	18.60	18.04				
50	64	32		18.76	18.67	18.11				
50	1	0		18.35	18.35	18.04				
50	1	132		18.20	18.07	17.54				
50	128	0		11.22	11.10	10.56				
50	1	1	QPSK	21.88	21.83	21.54				
50	1	131		21.73	21.65	21.12				
50	64	32		21.79	21.66	21.11				
50	1	0		18.34	18.33	18.07				
50	1	132		18.18	18.13	17.59				
50	128	0		10.23	10.12	9.65				
50	1	1	16-QAM	20.81	20.78	20.48	20.38	0.1091		
50	1	1	64-QAM	19.45	19.31	19.10				
50	1	1	256-QAM	17.38	17.47	17.10				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	18.63	18.64	18.46	21.53	0.1422		
60	1	160		18.93	18.83	18.61				
60	81	40		18.79	18.60	18.20				
60	1	0		18.19	18.14	17.91				
60	1	161		18.48	18.35	18.13				
60	162	0		11.23	11.11	10.61				
60	1	1	QPSK	21.73	21.66	21.44				
60	1	160		21.96	21.74	21.60				
60	81	40		21.83	21.65	21.22				
60	1	0		18.17	18.15	17.91				
60	1	161		18.49	18.37	18.13				
60	162	0		10.23	10.06	9.63				
60	1	1	16-QAM	20.66	20.52	20.29	20.23	0.1054		
60	1	1	64-QAM	19.27	19.13	18.89				
60	1	1	256-QAM	17.30	17.23	17.08				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	18.90	18.81	18.53	21.49	0.1409		
70	1	187		18.41	18.29	18.28				
70	90	45		18.78	18.72	18.42				
70	1	0		18.33	18.29	17.99				
70	1	188		17.86	17.87	17.74				
70	180	0		11.10	11.09	10.81				
70	1	1	QPSK	21.92	21.86	21.52				
70	1	187		21.47	21.31	21.28				
70	90	45		21.79	21.69	21.47				
70	1	0		18.38	18.31	17.99				
70	1	188		17.93	17.85	17.71				
70	180	0		10.15	10.10	9.83				
70	1	1	16-QAM	20.82	20.74	20.43	20.39	0.1094		
70	1	1	64-QAM	19.32	19.29	19.07				
70	1	1	256-QAM	17.53	17.40	17.13				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	18.82	18.79	18.46	21.42	0.1387		
80	1	215		18.43	18.27	18.25				
80	108	54		18.90	18.72	18.44				
80	1	0		18.27	18.27	17.96				
80	1	216		17.92	17.79	17.72				
80	216	0		11.10	11.01	10.74				
80	1	1	QPSK	21.85	21.73	21.45				
80	1	215		21.46	21.29	21.25				
80	108	54		21.85	21.74	21.47				
80	1	0		18.33	18.25	17.94				
80	1	216		17.96	17.70	17.76				
80	216	0		10.12	10.05	9.80				
80	1	1	16-QAM	20.78	20.79	20.34	20.36	0.1086		
80	1	1	64-QAM	19.38	19.29	18.88				
80	1	1	256-QAM	17.36	17.24	17.03				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	18.85	18.64	18.58	21.40	0.1380		
90	1	243		18.53	18.20	18.29				
90	120	60		18.78	18.73	18.48				
90	1	0		18.27	18.17	18.09				
90	1	244		18.01	17.69	17.78				
90	243	0		11.04	11.00	10.88				
90	1	1	QPSK	21.83	21.69	21.58				
90	1	243		21.52	21.19	21.28				
90	120	60		21.73	21.72	21.47				
90	1	0		18.32	18.14	18.07				
90	1	244		18.03	17.71	17.80				
90	243	0		10.01	9.98	9.83				
90	1	1	16-QAM	20.74	20.56	20.55	20.31	0.1074		
90	1	1	64-QAM	19.39	19.13	19.14				
90	1	1	256-QAM	17.45	17.32	17.12				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n78_Part96 Maximum Average Power [dBm] (GT - LC = -0.43 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	18.85	18.66	18.76	21.38	0.1374		
100	1	271		18.59	18.16	18.31				
100	135	67		18.77	18.76	18.46				
100	1	0		18.32	18.15	18.23				
100	1	272		18.07	17.67	17.83				
100	270	0		11.01	10.98	10.83				
100	1	1	QPSK	21.79	21.68	21.81				
100	1	271		21.58	21.15	21.32				
100	135	67		21.81	21.76	21.45				
100	1	0		18.30	18.15	18.29				
100	1	272		18.02	17.65	17.80				
100	270	0		10.07	10.02	9.75				
100	1	1	16-QAM	20.85	20.63	20.75	20.42	0.1102		
100	1	1	64-QAM	19.39	19.14	19.27				
100	1	1	256-QAM	17.30	17.21	17.33				
Limit	EIRP < 23dBm/10MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.


**<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.92	6.06	6.60	8.00	PASS
Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.66				PASS




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

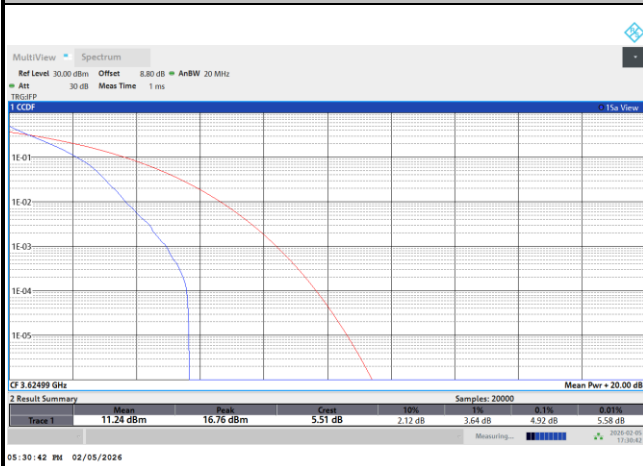


QPSK

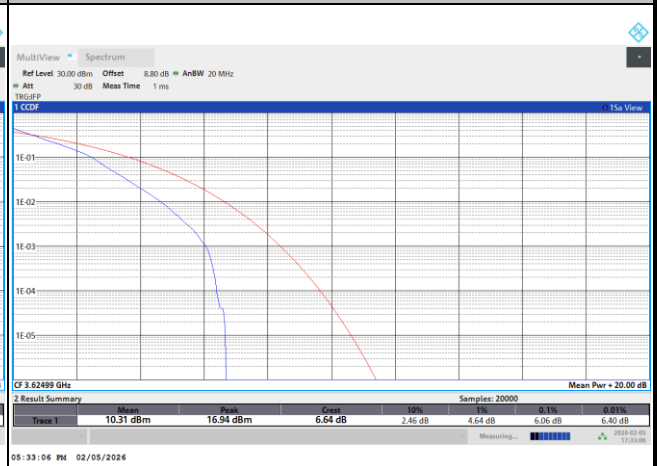


16QAM

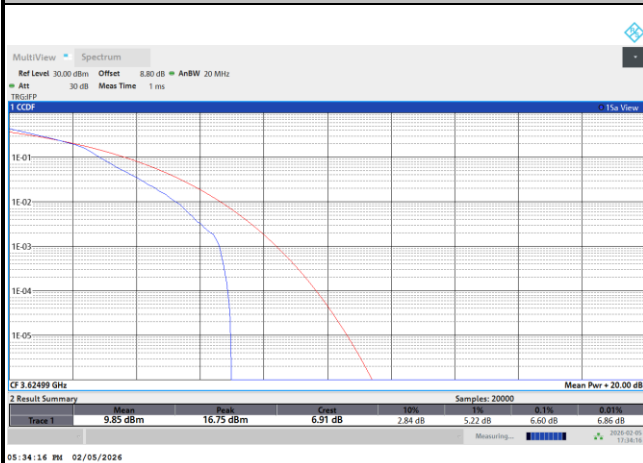

64QAM

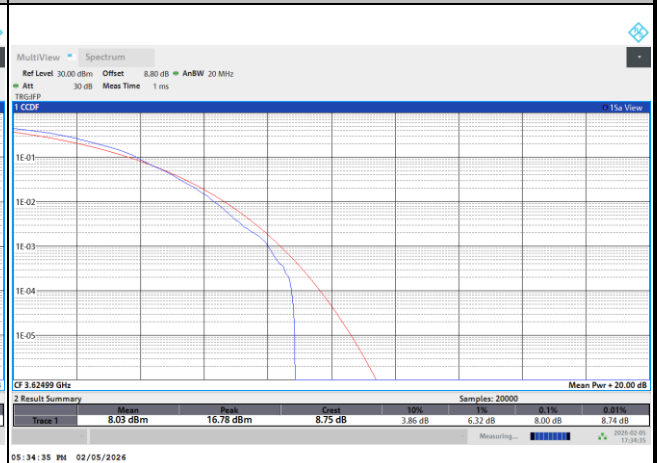

256QAM

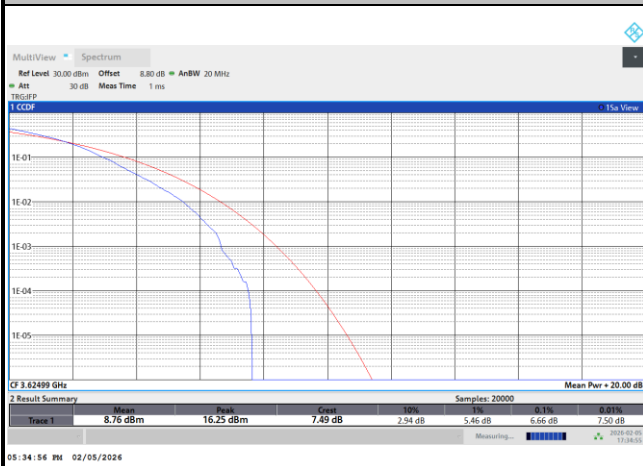


**26dB Bandwidth**

Mode	FR1 n77 : 26dB BW(MHz) / DFT-S OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	10.02	10.13	14.65	14.71	19.90	20.06	29.77	29.79
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	10.28		14.64		20.02		29.93	
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	38.89	38.86	48.68	48.94	62.97	62.74	69.22	69.37
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	38.64		48.62		62.89		69.41	
BW	80MHz		90MHz		100MHz			
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK		
Middle CH	81.98	82.49	92.14	91.89	101.68	101.77		
Mod.	16QAM		16QAM		16QAM			
Middle CH	82.11		92.16		101.75			




FR1 n77 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

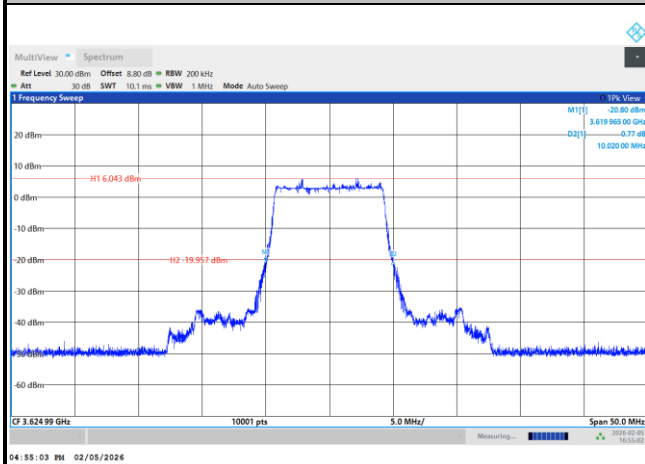

QPSK

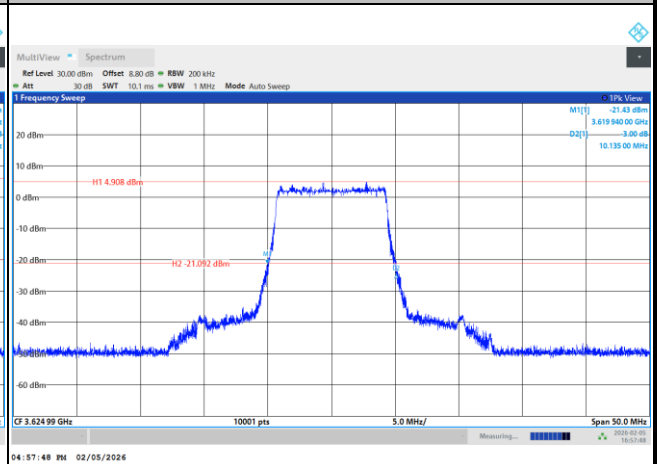


16QAM

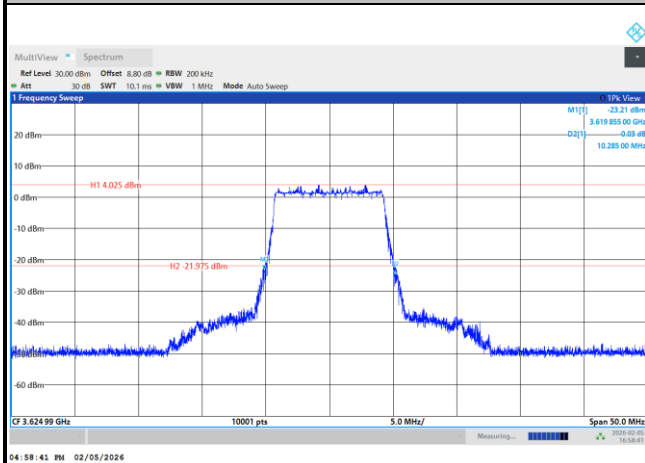




FR1 n77 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

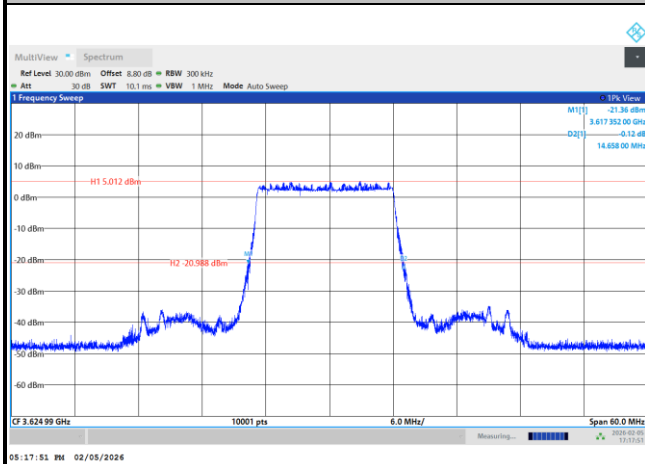

QPSK

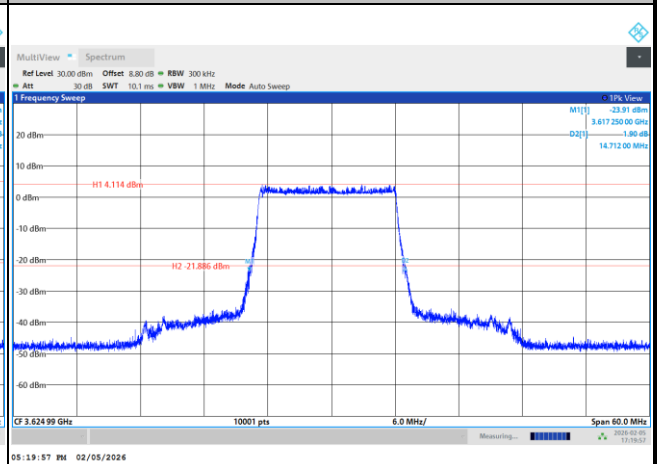


16QAM

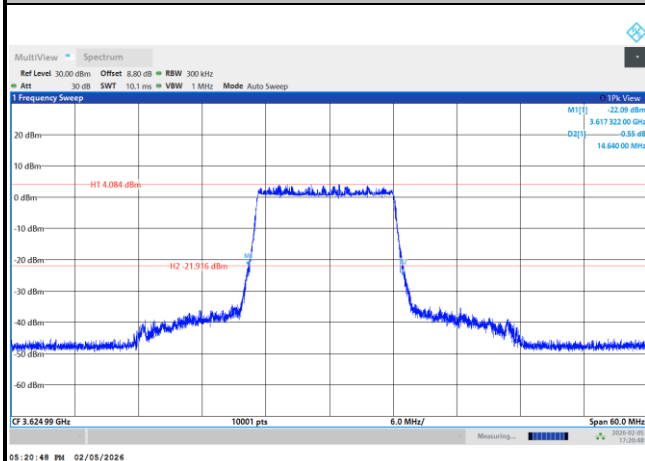




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

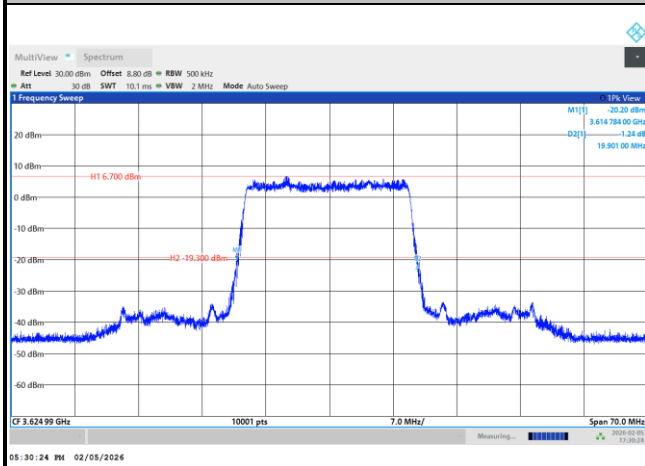

QPSK

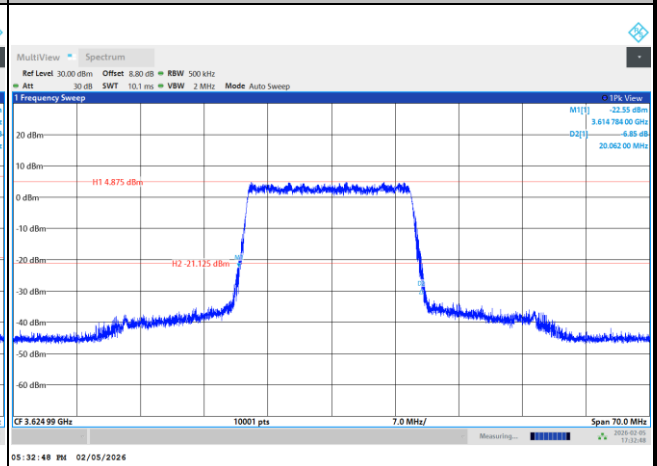


16QAM

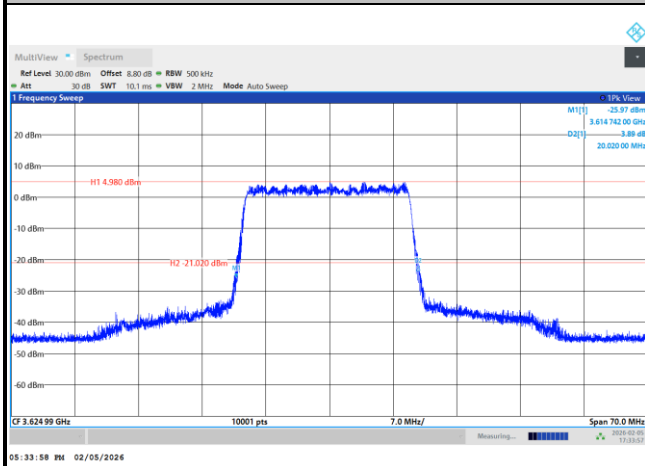




FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

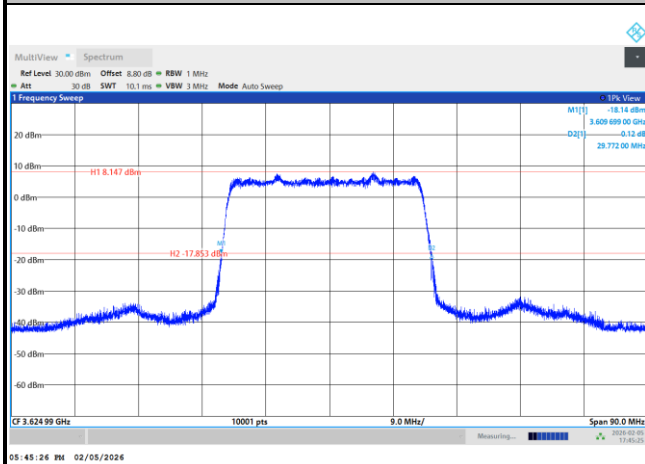

QPSK

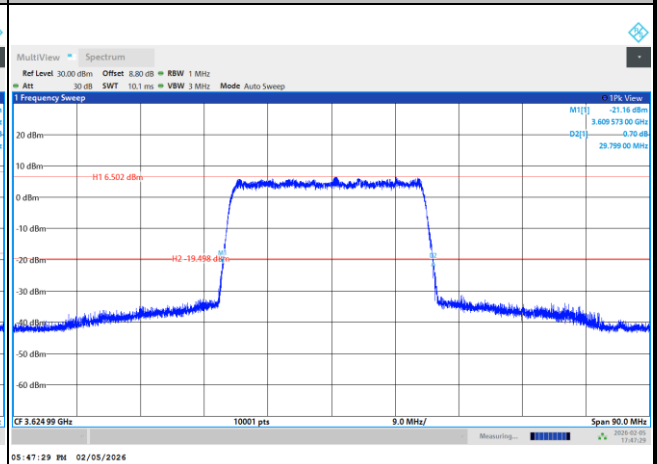


16QAM

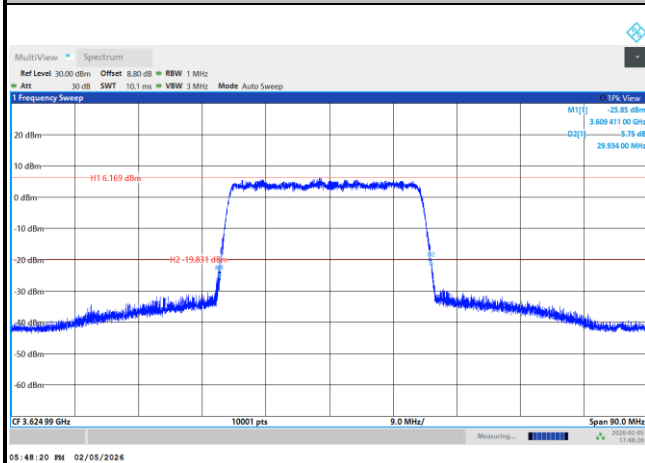




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

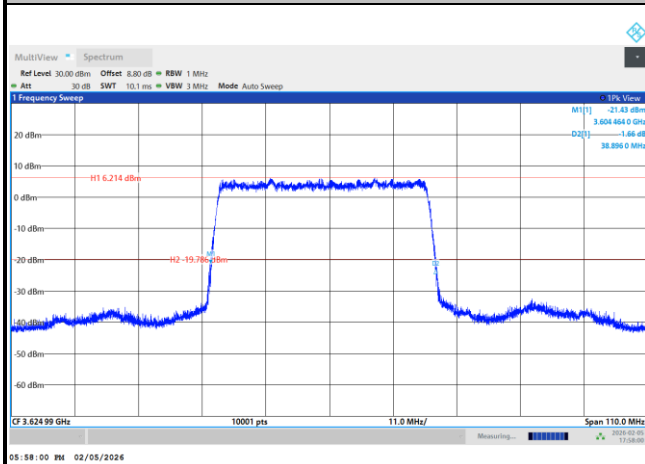

QPSK

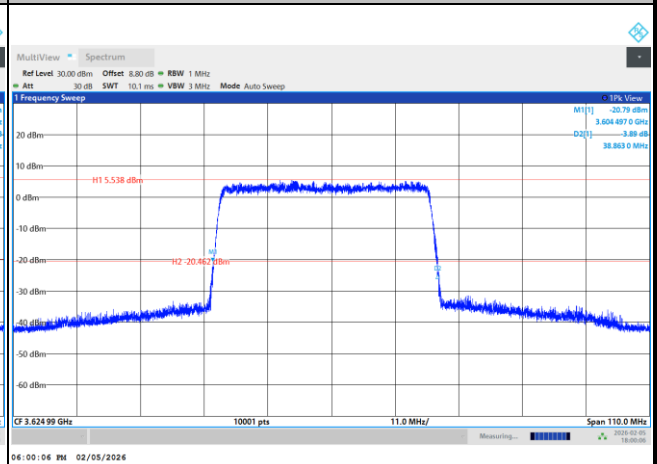


16QAM

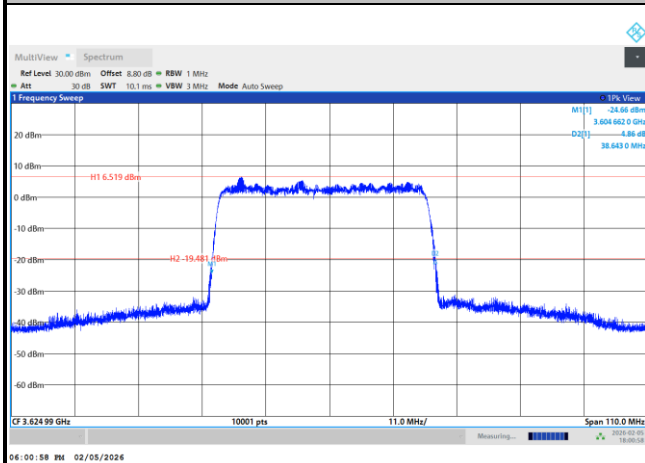




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

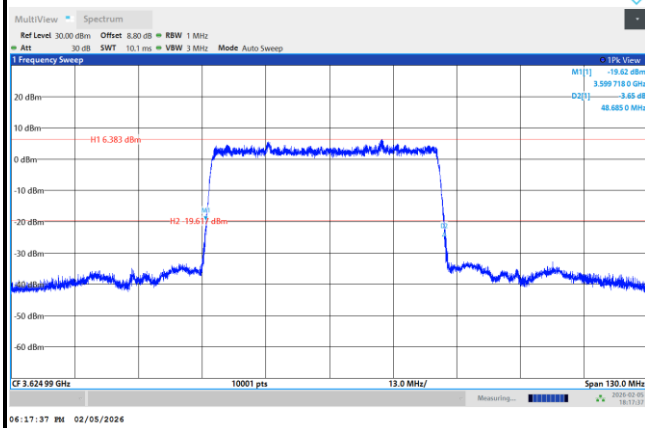

QPSK

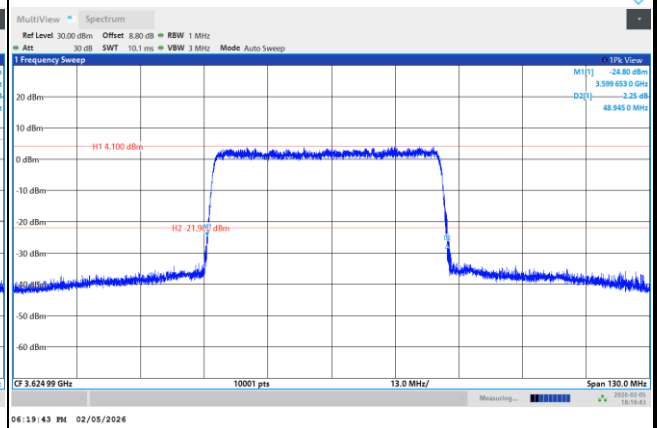

16QAM


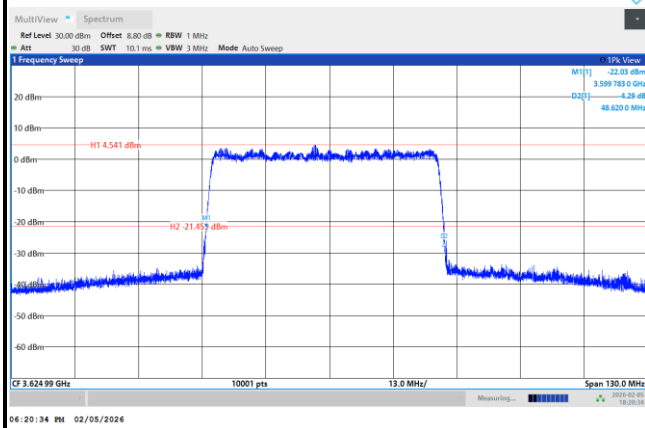





FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

QPSK

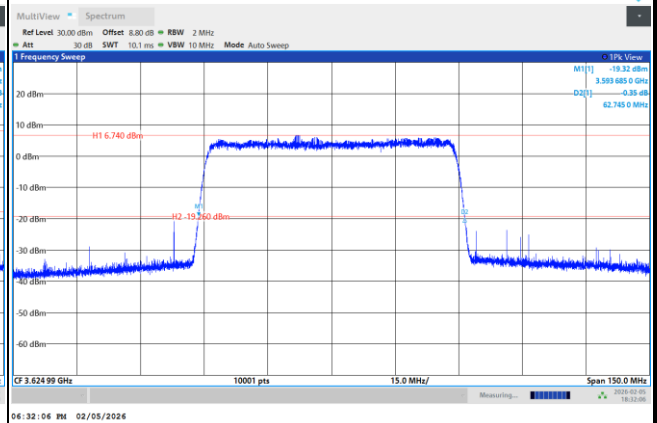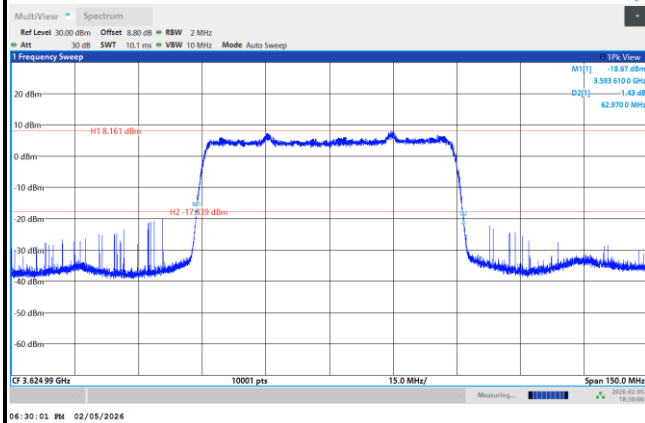


16QAM

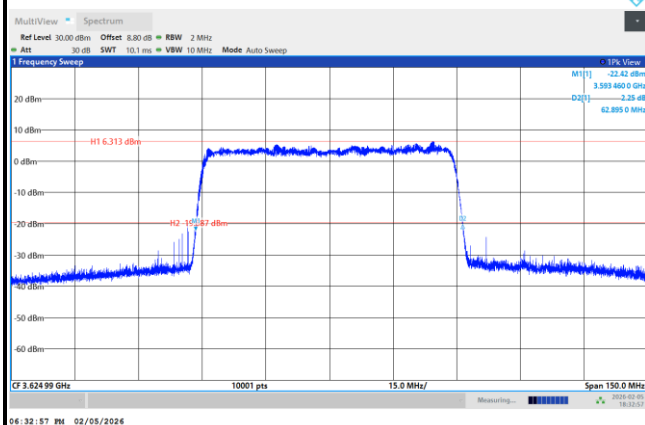




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

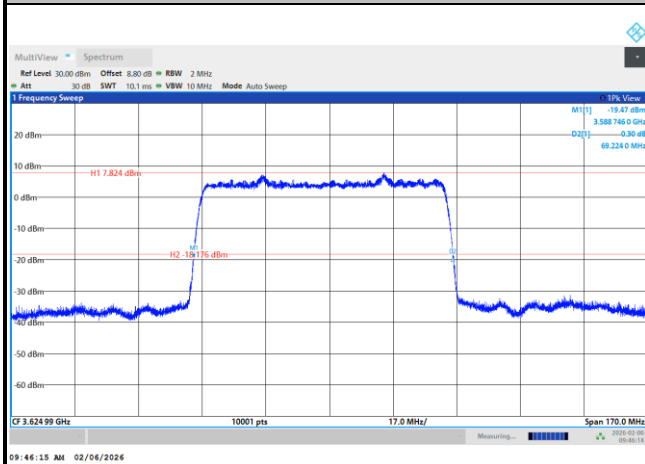

QPSK

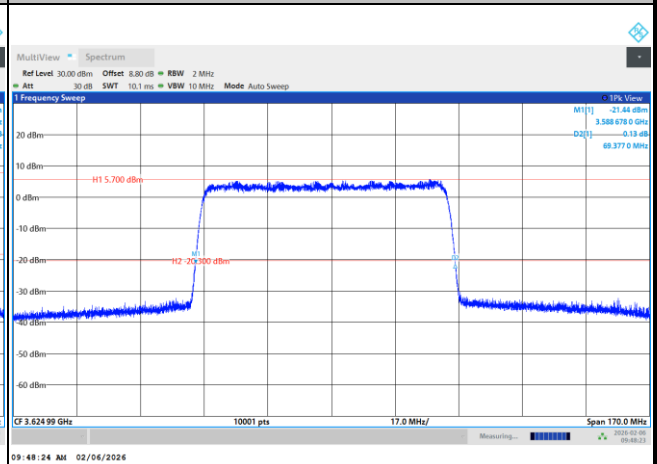

16QAM


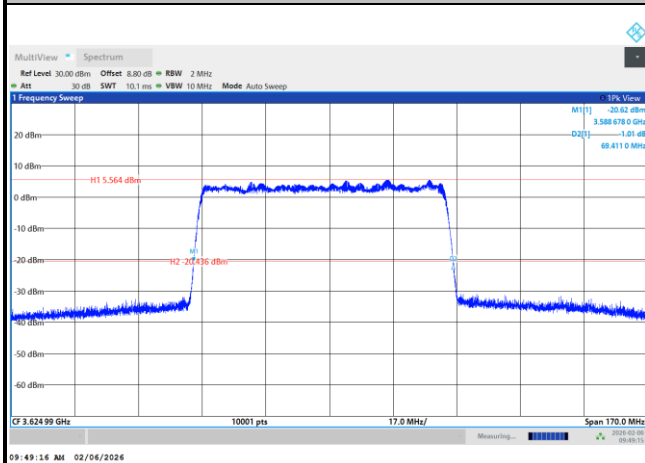





FR1 n77 / 80MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

QPSK

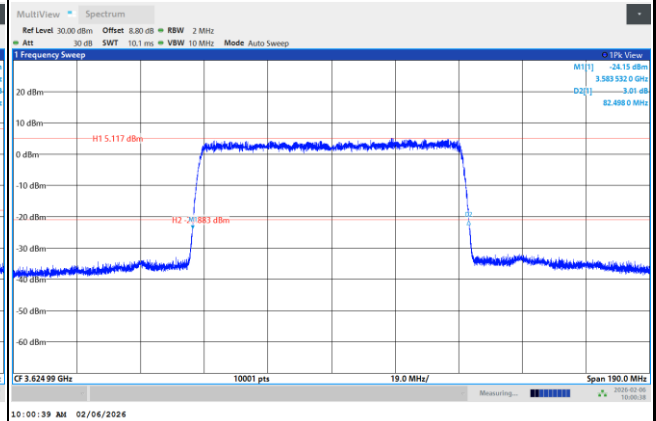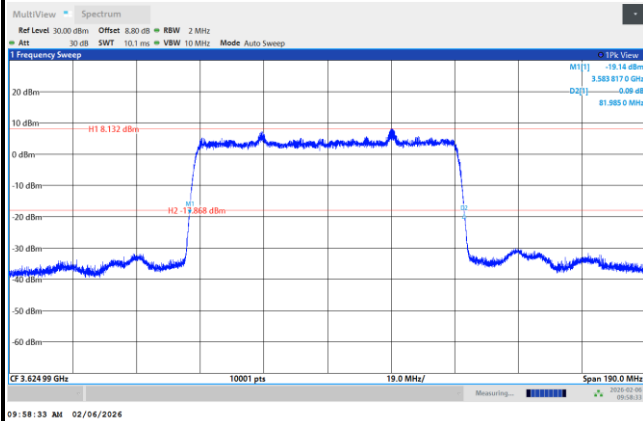


16QAM

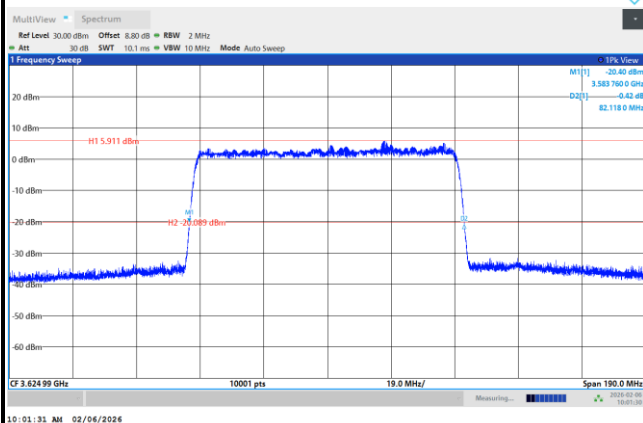




FR1 n77 / 90MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

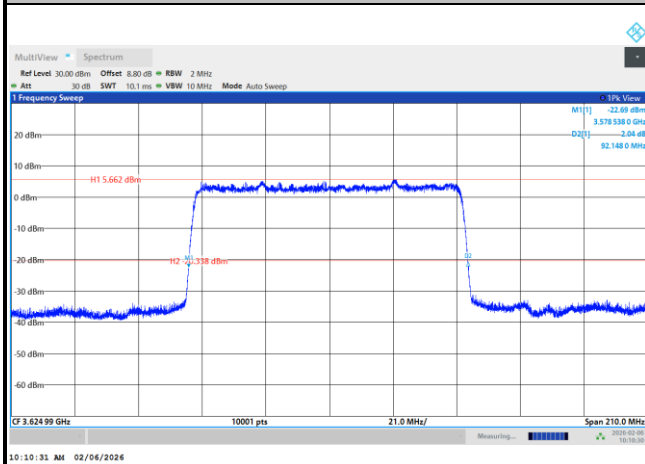

QPSK

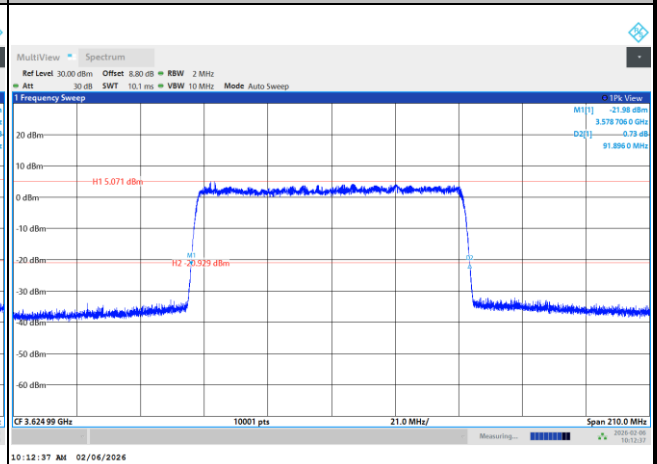


16QAM

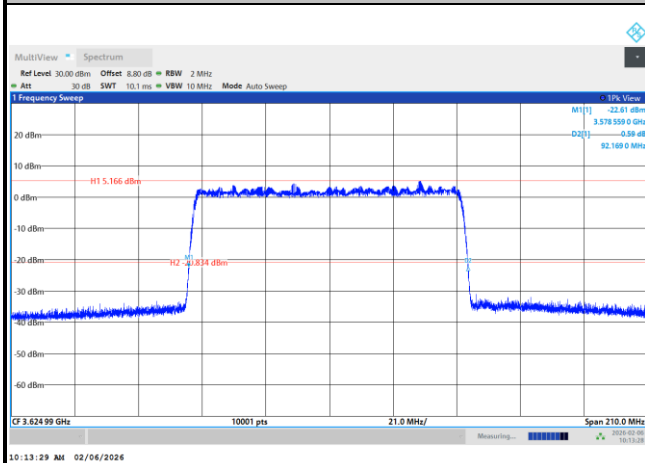




FR1 n77 / 100MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

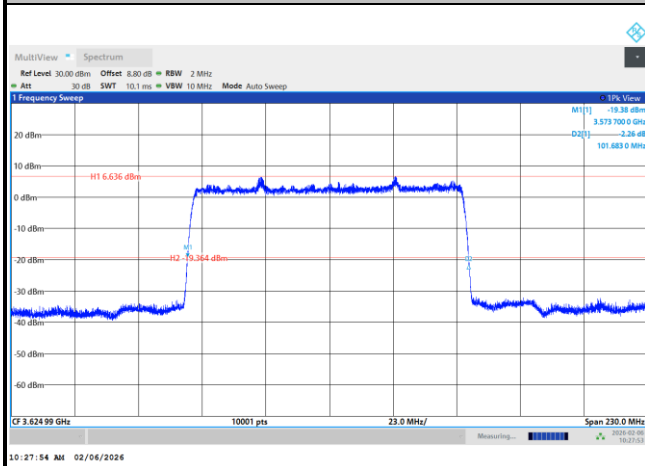

QPSK

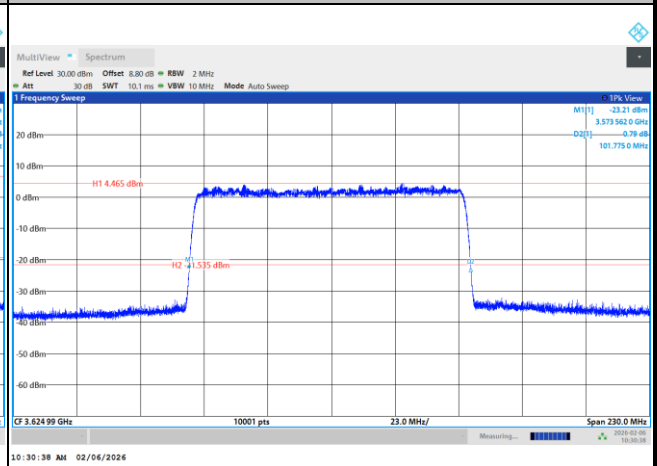

16QAM

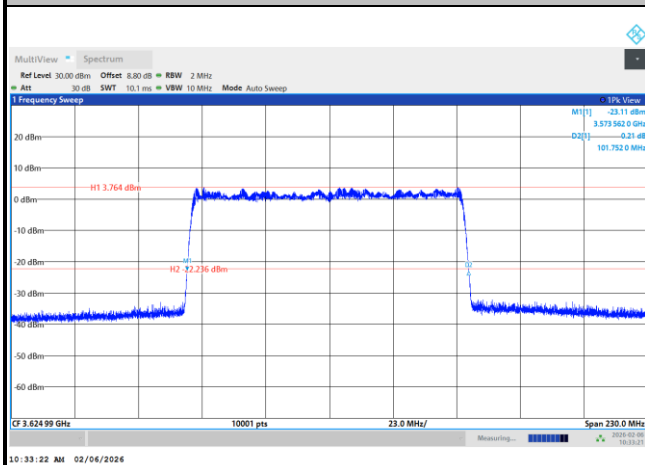


**Occupied Bandwidth**

Mode	FR1 n77 : 99%OBW(MHz) / DFT-S OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	8.69	8.68	12.99	13.00	18.05	18.07	27.28	27.21
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	8.71		13.03		18.08		27.19	
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	36.09	36.03	46.02	45.99	58.72	58.44	64.79	64.91
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	35.81		45.97		58.83		65.06	
BW	80MHz		90MHz		100MHz			
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK		
Middle CH	77.65	77.66	87.31	87.20	96.90	96.59		
Mod.	16QAM		16QAM		16QAM			
Middle CH	77.63		87.33		96.86			




FR1 n77 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

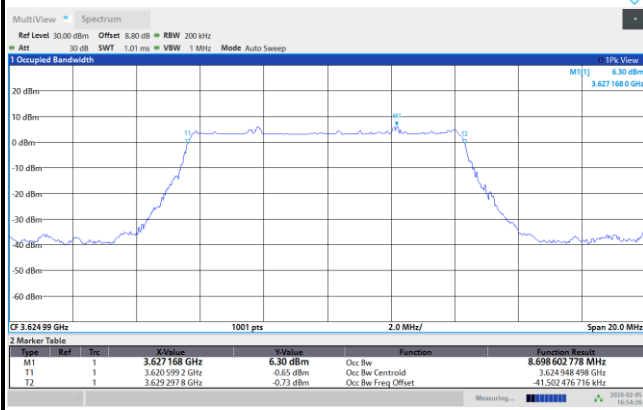

QPSK

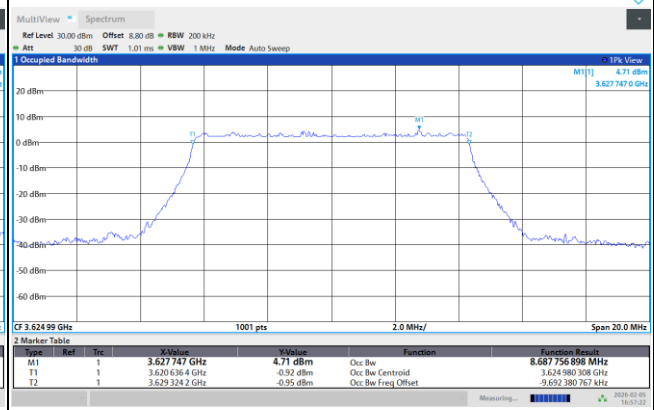


16QAM

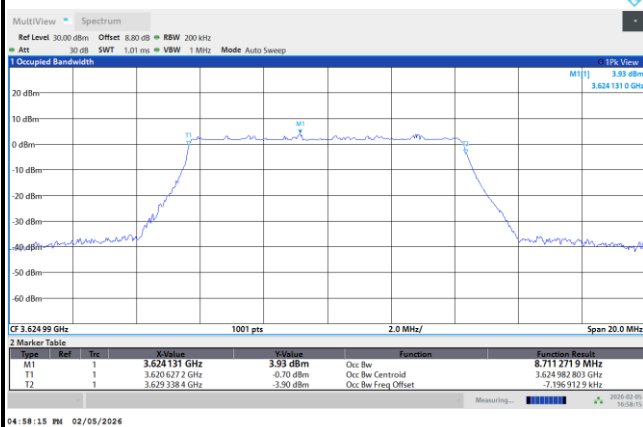




FR1 n77 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

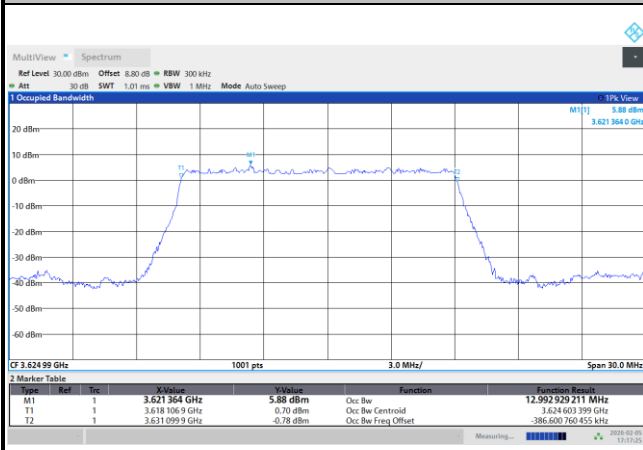

QPSK

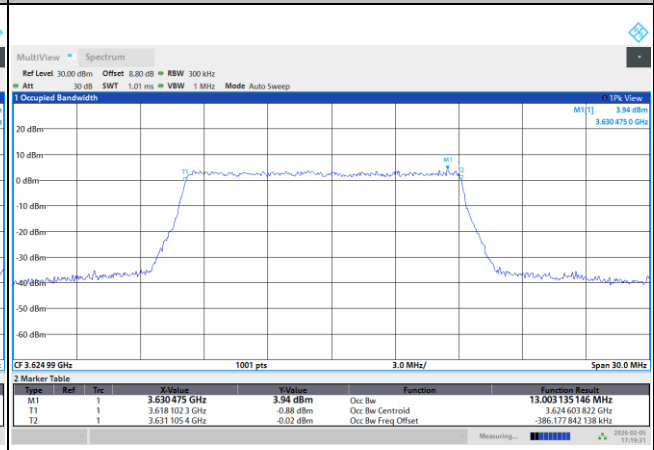


16QAM

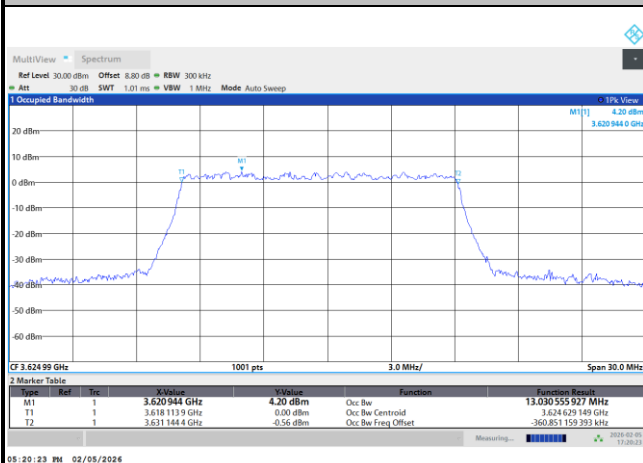




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

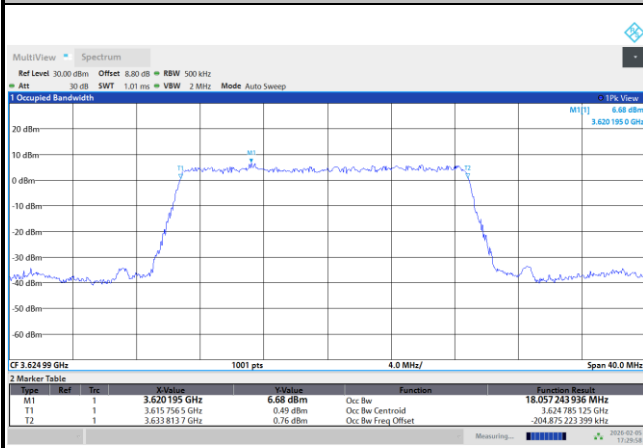


05:29:58 PM 02/05/2026

QPSK

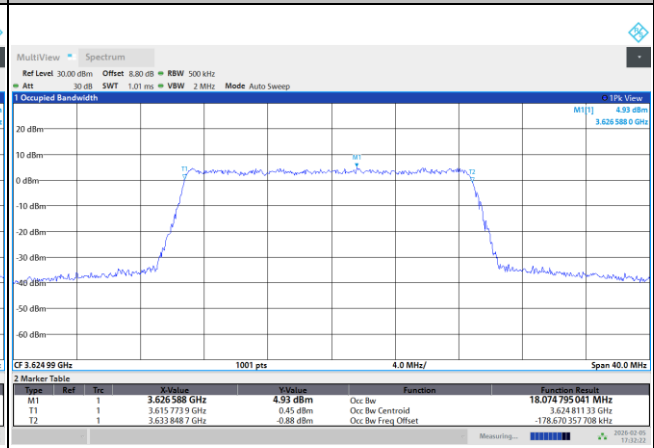

05:32:22 PM 02/05/2026

16QAM

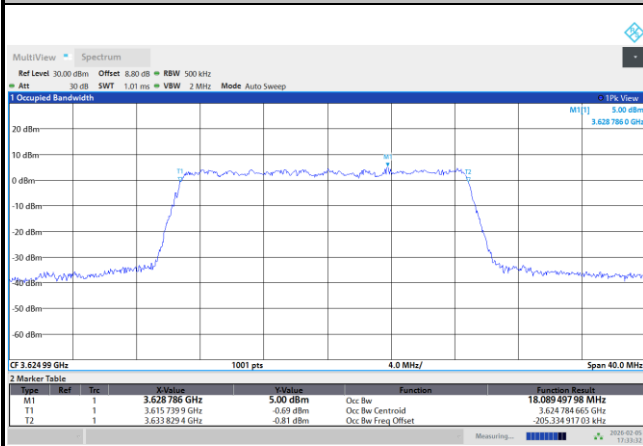


05:33:32 PM 02/05/2026




FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

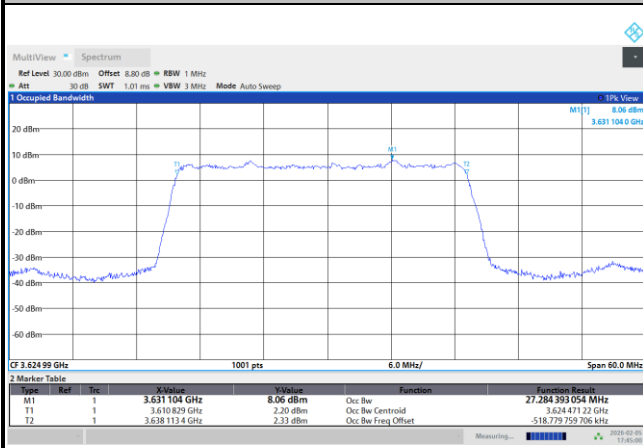

QPSK

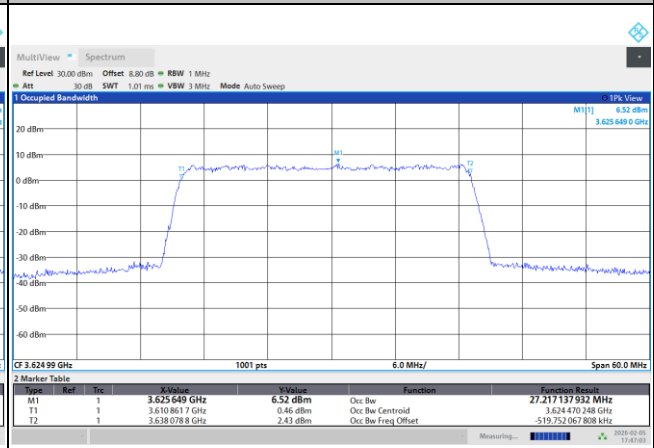


16QAM

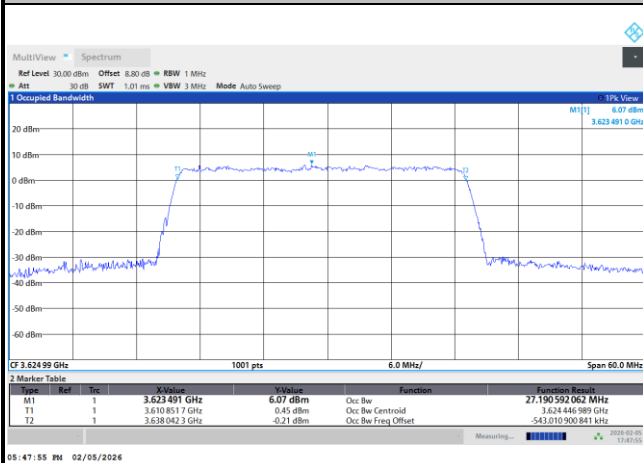




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

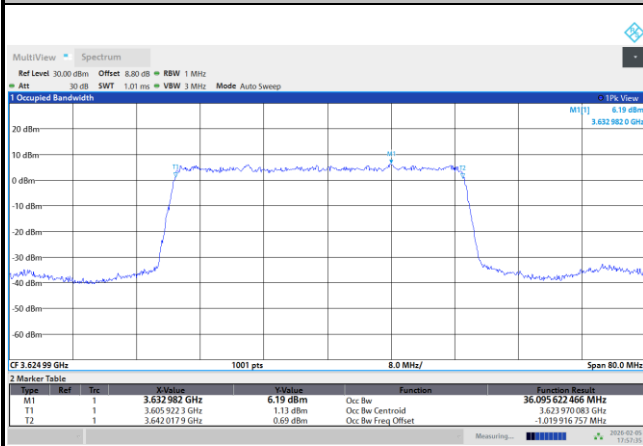

QPSK

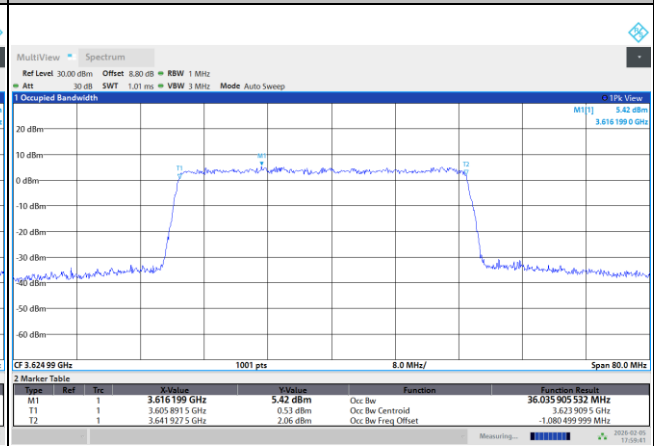


16QAM

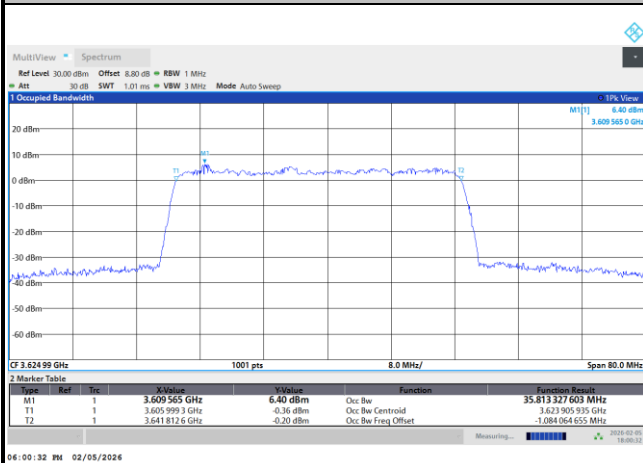




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

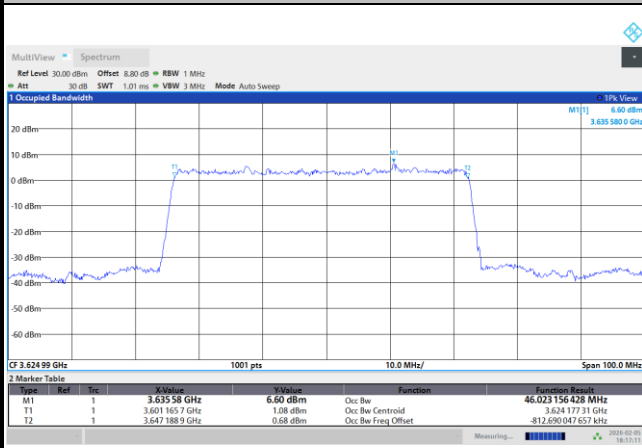


06:17:12 PM 02/05/2026

QPSK

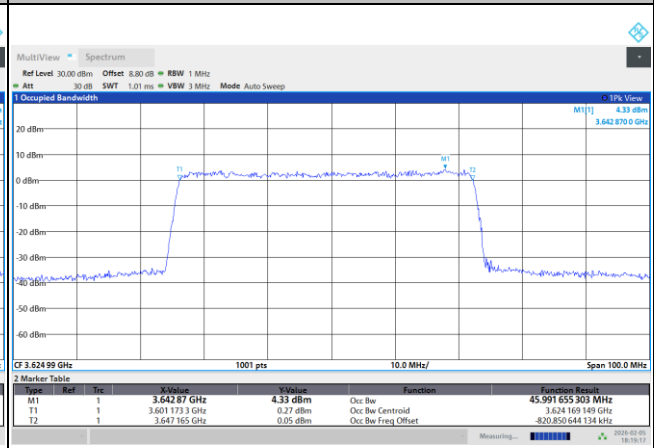

06:19:17 PM 02/05/2026

16QAM

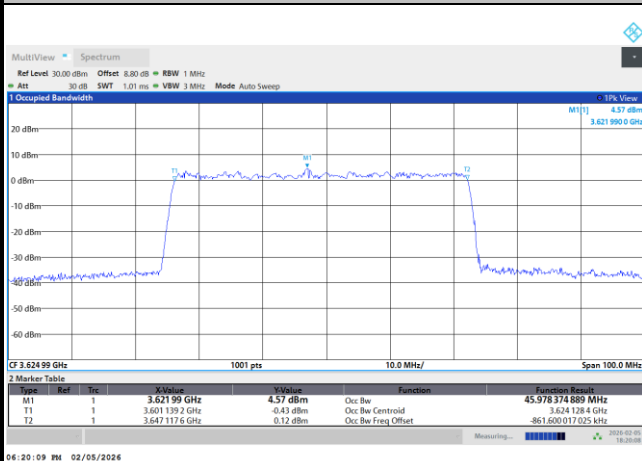


06:20:09 PM 02/05/2026




FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

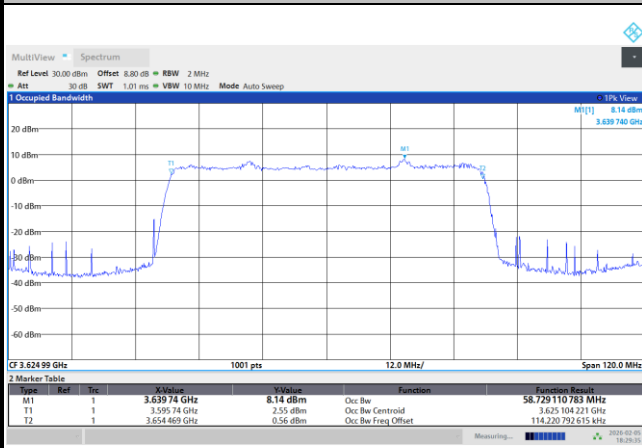


06:29:35 PM 02/05/2026

QPSK

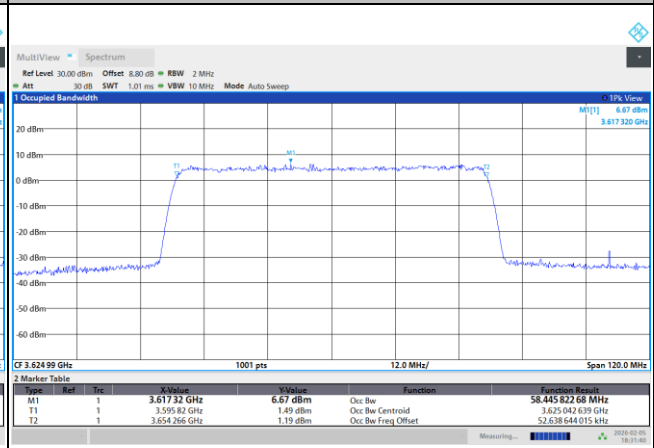

06:31:40 PM 02/05/2026

16QAM

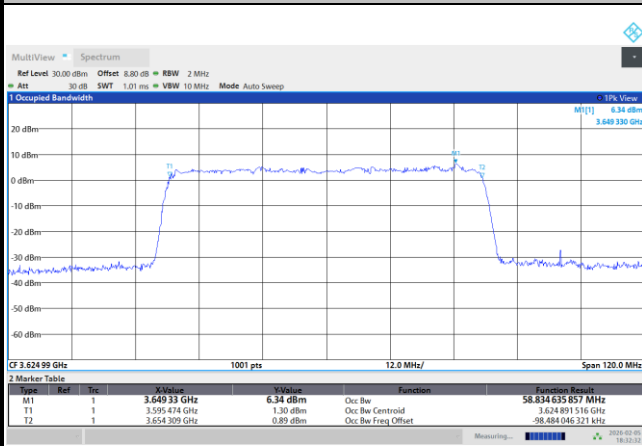


06:32:32 PM 02/05/2026




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

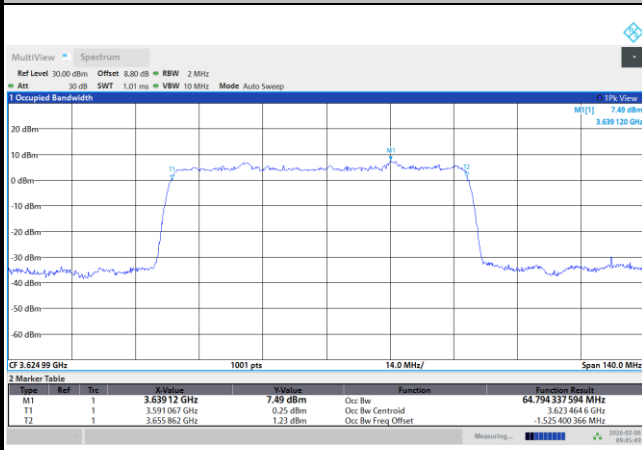


09:45:50 AM 02/06/2026

QPSK

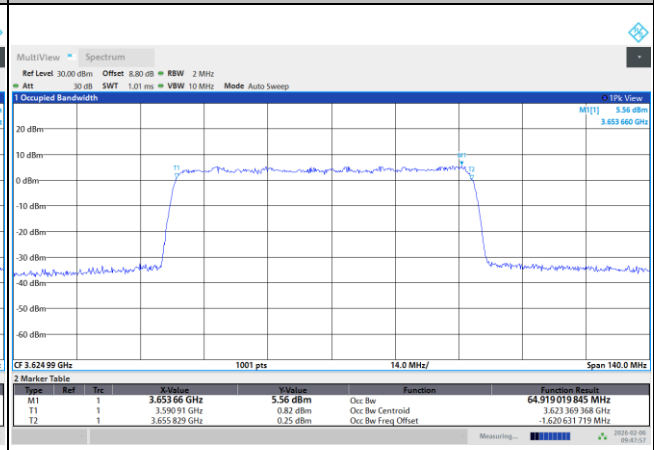

09:47:58 AM 02/06/2026

16QAM

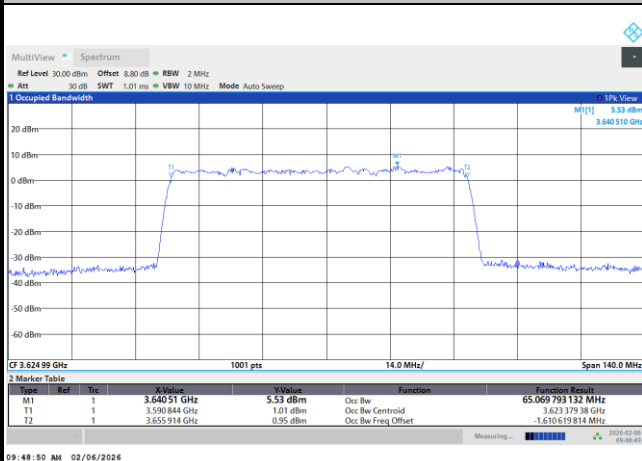


09:48:50 AM 02/06/2026




FR1 n77 / 80MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

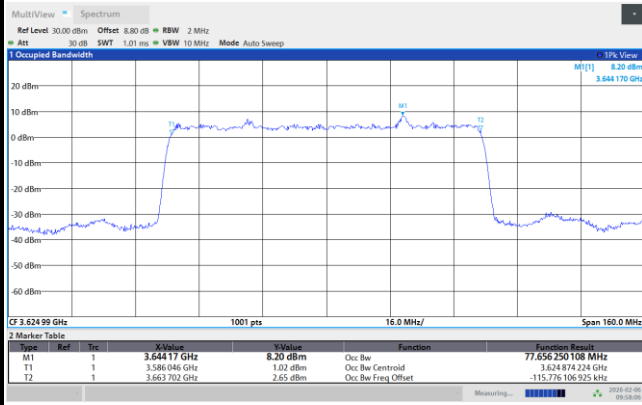


09:58:07 AM 02/06/2026

QPSK

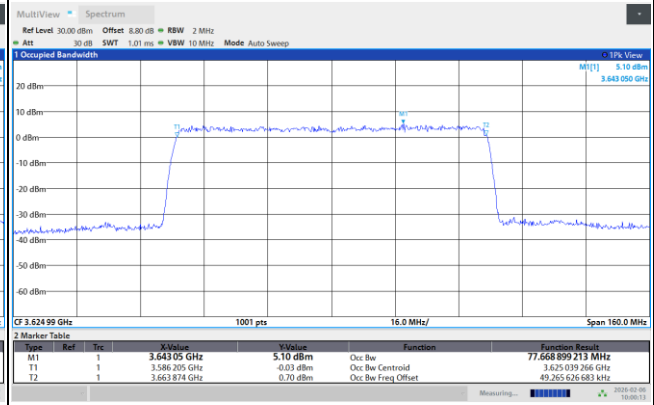

10:00:14 AM 02/06/2026

16QAM

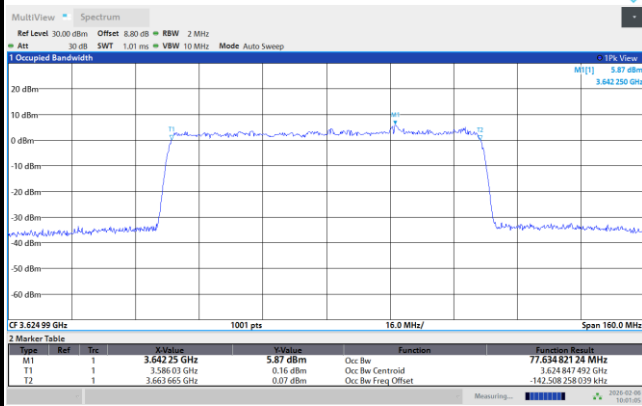


10:01:04 AM 02/06/2026




FR1 n77 / 90MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

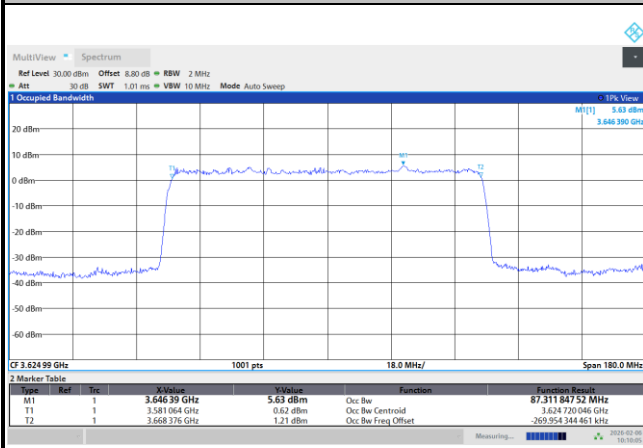

10:10:05 AM 02/06/2026

QPSK

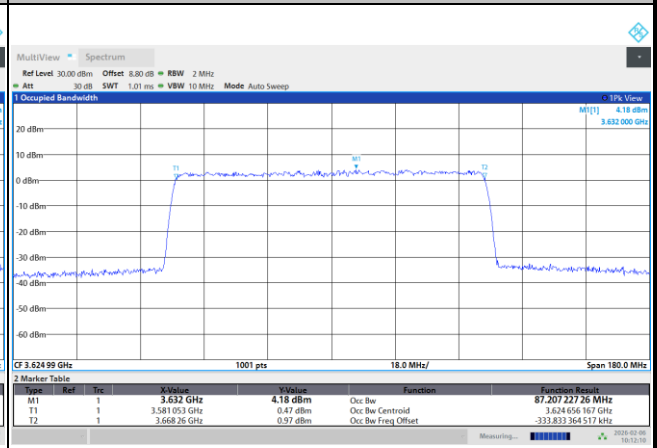

10:12:11 AM 02/06/2026

16QAM




10:13:04 AM 02/06/2026




FR1 n77 / 100MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

QPSK

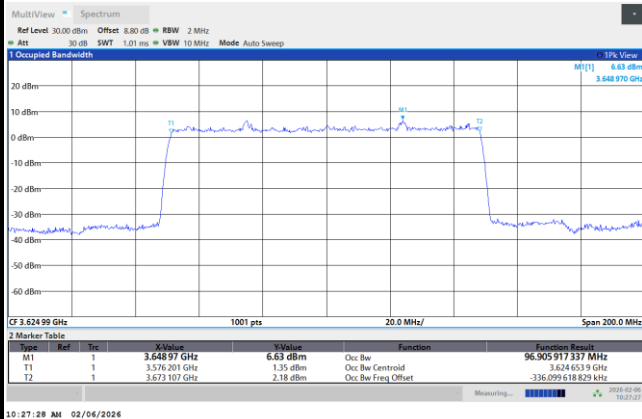


10:27:28 AM 02/06/2026

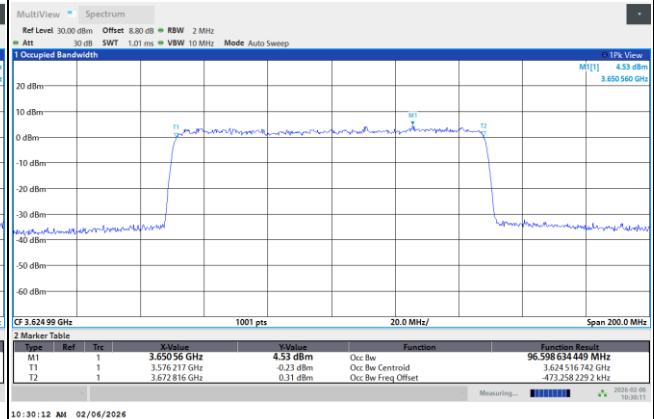

10:30:12 AM 02/06/2026

16QAM

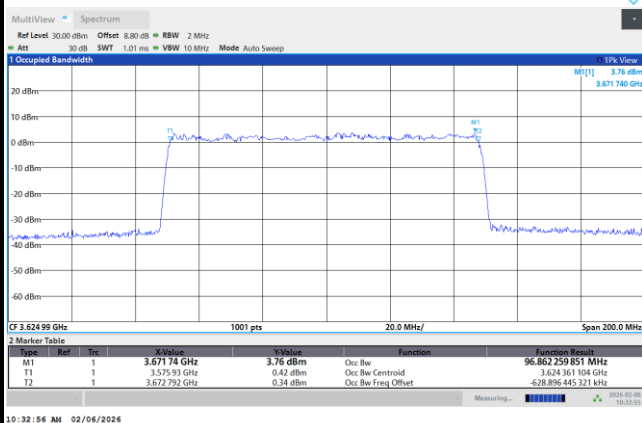

10:32:56 AM 02/06/2026




Unwanted Emission (MASK)

FR1 n77 Part96 / 10MHz / DFT-S OFDM / PI/2 BPSK


Lowest Channel

1RB0

1RBmax

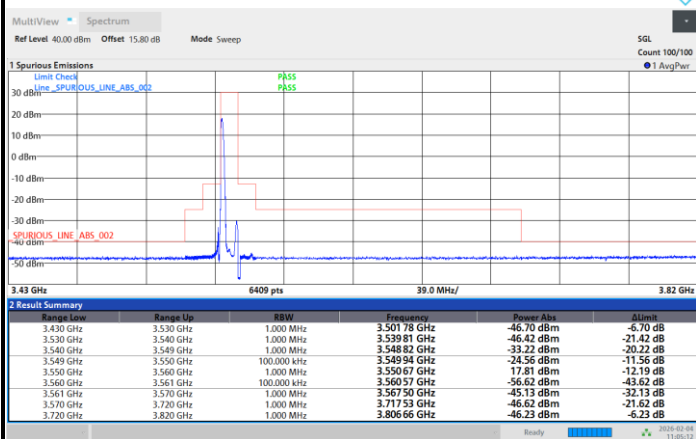


11:05:13 AM 02/04/2026

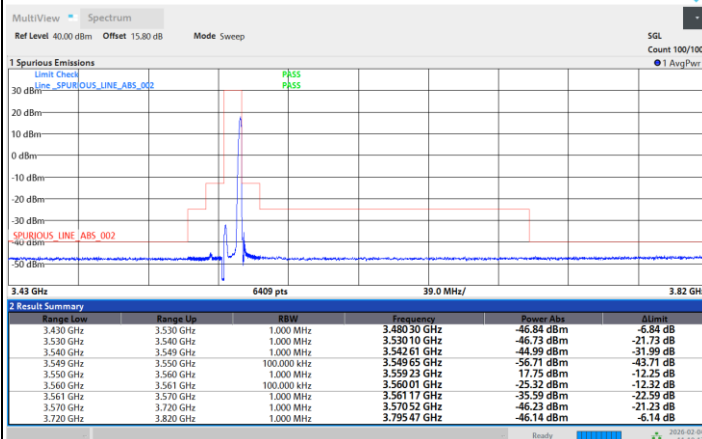

11:10:12 AM 02/04/2026

Full RB

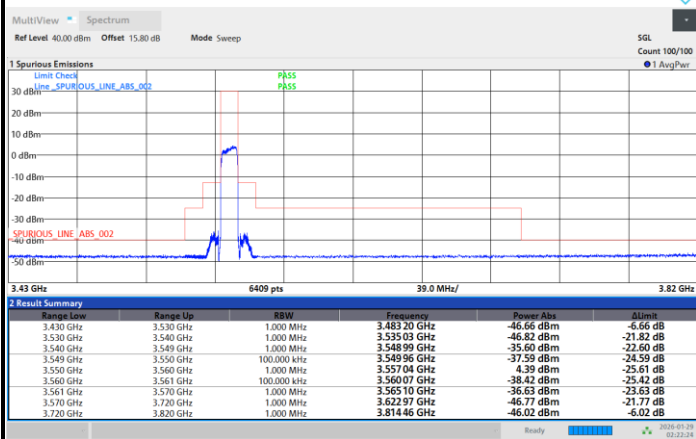


02:22:25 AM 01/29/2026




FR1 n77 Part96 / 10MHz / DFT-S OFDM / PI/2 BPSK

Middle Channel


1RB0

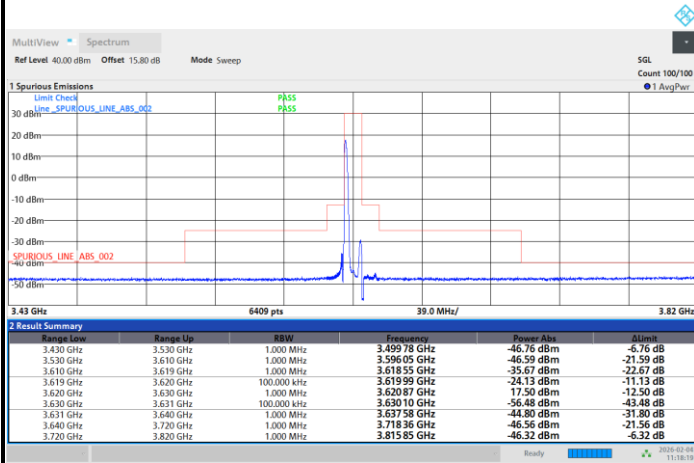

1RBmax

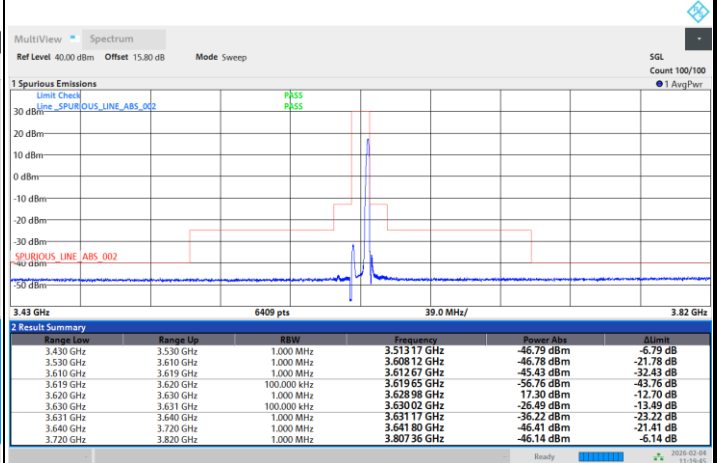

Full RB

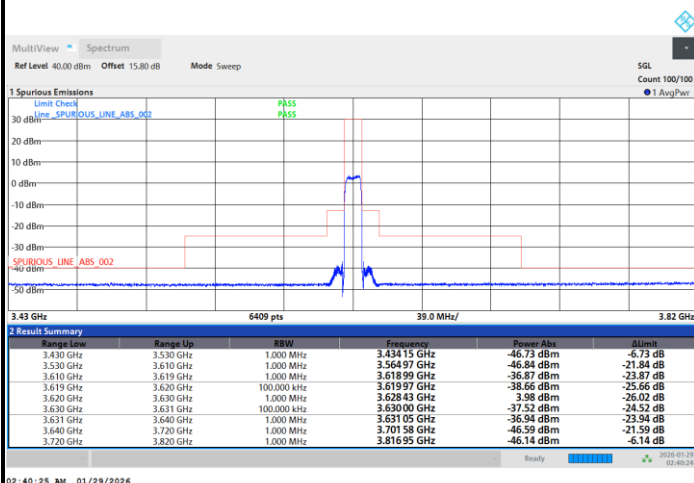





FR1 n77 Part96 / 10MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel

1RB0

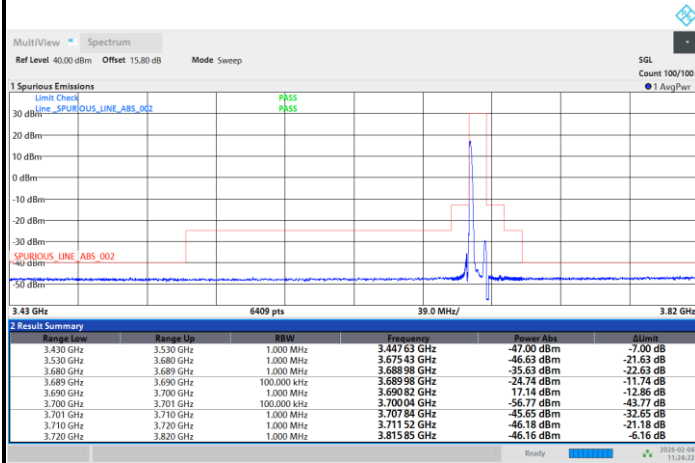

1RBmax

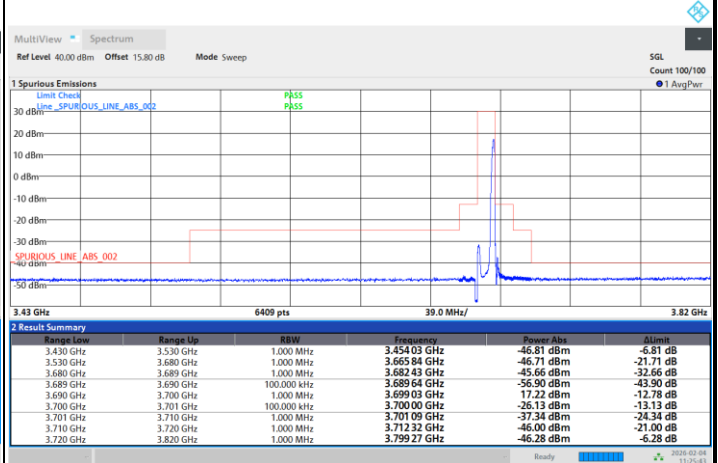

Full RB

