



FCC RADIO TEST REPORT

FCC ID : UZ7TCW010
Equipment : Touch Computer
Brand Name : ZEBRA
Model Name : TCW010
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 28, 2025 and testing was performed from Dec. 21, 2025 to Feb. 15, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	10
1.4 Testing Location	11
1.5 Applicable Standards.....	11
2 Test Configuration of Equipment Under Test	12
2.1 Carrier Frequency and Channel	13
2.2 Test Mode.....	16
2.3 Connection Diagram of Test System.....	20
2.4 Support Unit used in test configuration and system	21
2.5 EUT Operation Test Setup	21
2.6 Measurement Results Explanation Example.....	21
3 Test Result	22
3.1 26dB & 99% Occupied Bandwidth Measurement	22
3.2 Fundamental Maximum EIRP Measurement	23
3.3 Fundamental Power Spectral Density Measurement	24
3.4 In-Band Emissions (Channel Mask)	26
3.5 Contention Based Protocol.....	28
3.6 Unwanted Emissions Measurement.....	52
3.7 AC Conducted Emission Measurement.....	56
3.8 Antenna Requirements.....	58
4 List of Measuring Equipment.....	59
5 Measurement Uncertainty	61
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N0610-01J	01	Initial issue of report	Mar. 26, 2026
FR5N0610-01J	02	Revised Product Specification of Equipment Under Test. and Minimum Antenna gain for Contention Based Protocol Test This report is an updated version, replacing the report issued on Mar. 26, 2026.	Apr. 30, 2026
FR5N0610-01J	03	Revised Antenna Directional Gain This report is an updated version, replacing the report issued on Apr. 30, 2026.	May 26, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	7.00 dB under the limit at 17895.00 MHz
3.7	15.207	AC Conducted Emission	Pass	10.38 dB under the limit at 1.59 MHz
3.8	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Vina Su

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	ZEBRA
Model Name	TCW010
FCC ID	UZ7TCW010
Sample 1	Basic + SE4730(SR500)
Sample 2	Basic + SE56(AC670)
Sample 3	Premium + SE4730(SR500)
Sample 4	Premium + SE56(AC670)
Sample 5	HC Basic (no scanner)
Sample 6	HC Premium + SE4730(SR500)
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be ETH20/ETH40/ETH80/ETH160/ETH320 Bluetooth BR/EDR/LE
FW Version	FUSION_QA_7_1.3.0.002_V
SW Version	15-12-29.00-VG-U00-PRD-ERS-04
MFD	18-Nov-25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter 1	Brand Name	Zebra	Model Name	SAWA-65-20005A
Battery 1 (1x)	Brand Name	Zebra	Model Name	BT-000473
Battery 2 (1.5x)	Brand Name	Zebra	Model Name	BT-000473E
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC2X-USBC-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack.	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-02
USB-C to 3.5mm adapter cable	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
HS2100 rugged wired headset	Brand Name	Zebra	Part Number	HS2100-BTN-LSB
HS2100 Headset Cable for connecting the HS2100 Headset via 3.5mm	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Rugged boot	Brand Name	Zebra	Part Number	SG-TC2L-BOOT-01
Handstrap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Trigger Handle	Brand Name	Zebra	Part Number	CRG-TC2L-SNP1-01
Arm Mounts	Brand Name	Zebra	Part Number	SG-TC2L-ARMNT-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01
HS3100 rugged Bluetooth headset	Brand Name	Zebra	Part Number	HS3100-OTH



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Channel Frequency Range	5925 MHz ~ 6425 MHz 6425 MHz ~ 6525 MHz 6525 MHz ~ 6875 MHz 6875 MHz ~ 7125 MHz
Maximum Output Power to Antenna <CDD Modes>	MIMO <Ant. 7+6>: <5925 MHz ~ 6425 MHz> 802.11a: 8.88 dBm / 0.0077 W <6425 MHz ~ 6525 MHz> 802.11a: 8.88 dBm / 0.0077 W <6525 MHz ~ 6875 MHz> 802.11a: 8.42 dBm / 0.0070 W <6875 MHz ~ 7125 MHz> 802.11a: 8.89 dBm / 0.0077 W
Maximum Output Power to Antenna <SDM Modes>	MIMO <Ant. 7+6>: <5925 MHz ~ 6425 MHz> 802.11ax: HE20: 11.99 dBm / 0.0158 W 802.11ax: HE40: 14.74 dBm / 0.0298 W 802.11ax: HE80: 17.52 dBm / 0.0565 W 802.11ax: HE160: 20.87 dBm / 0.1222 W 802.11be: EHT20: 12.13 dBm / 0.0163 W 802.11be: EHT40: 15.03 dBm / 0.0318 W 802.11be: EHT80: 17.79 dBm / 0.0601 W 802.11be: EHT160: 20.95 dBm / 0.1245 W 802.11be: EHT320: 21.77 dBm / 0.1503 W <6425 MHz ~ 6525 MHz> 802.11ax: HE20: 11.95 dBm / 0.0157 W 802.11ax: HE40: 14.61 dBm / 0.0289 W 802.11ax: HE80: 17.22 dBm / 0.0527 W 802.11ax: HE160: 20.38 dBm / 0.1091 W 802.11be: EHT20: 12.08 dBm / 0.0161 W 802.11be: EHT40: 14.67 dBm / 0.0293 W 802.11be: EHT80: 17.30 dBm / 0.0537 W 802.11be: EHT160: 20.47 dBm / 0.1114 W 802.11be: EHT320: 21.67 dBm / 0.1469 W <6525 MHz ~ 6875 MHz> 802.11ax: HE20: 11.73 dBm / 0.0149 W 802.11ax: HE40: 14.90 dBm / 0.0309 W 802.11ax: HE80: 17.68 dBm / 0.0586 W 802.11ax: HE160: 20.62 dBm / 0.1153 W 802.11be: EHT20: 11.94 dBm / 0.0156 W 802.11be: EHT40: 14.96 dBm / 0.0313 W 802.11be: EHT80: 17.79 dBm / 0.0601 W 802.11be: EHT160: 20.71 dBm / 0.1178 W <6875 MHz ~ 7125 MHz> 802.11ax: HE20: 11.99 dBm / 0.0158 W 802.11ax: HE40: 14.88 dBm / 0.0308 W 802.11ax: HE80: 17.64 dBm / 0.0581 W 802.11ax: HE160: 20.46 dBm / 0.1159 W 802.11be: EHT20: 12.14 dBm / 0.0164 W 802.11be: EHT40: 15.11 dBm / 0.0324 W 802.11be: EHT80: 17.69 dBm / 0.0587 W



	802.11be: EHT160: 20.57 dBm / 0.1140 W 802.11be: EHT320: 21.56 dBm / 0.1432 W								
99% Occupied Bandwidth <CDD Modes>	MIMO <Ant. 7> 802.11a: 17.13 MHz MIMO <Ant. 6> 802.11a: 17.45 MHz								
99% Occupied Bandwidth <SDM Modes>	MIMO <Ant. 7> 802.11be: EHT20: 19.22 MHz 802.11be: EHT40: 38.34 MHz 802.11be: EHT80: 77.82 MHz 802.11be: EHT160: 157.95 MHz 802.11be: EHT320: 317.68 MHz MIMO <Ant. 6> 802.11be: EHT20: 19.20 MHz 802.11be: EHT40: 38.33 MHz 802.11be: EHT80: 77.76 MHz 802.11be: EHT160: 157.57 MHz 802.11be: EHT320: 317.39 MHz								
Antenna Type	<Ant. 7>: IFA Antenna <Ant. 6>: IFA Antenna								
Antenna Gain	<5925 MHz ~ 6425 MHz> <Ant. 7>: 0.87 dBi <Ant. 6>: -1.06 dBi <6425 MHz ~ 6525 MHz> <Ant. 7>: 0.95 dBi <Ant. 6>: -1.2 dBi <6525 MHz ~ 6875 MHz> <Ant. 7>: 1.01 dBi <Ant. 6>: -1.13 dBi <6875 MHz ~ 7125 MHz> <Ant. 7>: 0.73 dBi <Ant. 6>: -1.2 dBi								
Type of Modulation	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096QAM)								
Antenna Function Description	<table><tr><td></td><td>Ant. 6</td><td>Ant. 7</td></tr><tr><td>802.11 a/n/ac/ax/be MIMO</td><td>V</td><td>V</td></tr></table>				Ant. 6	Ant. 7	802.11 a/n/ac/ax/be MIMO	V	V
	Ant. 6	Ant. 7							
802.11 a/n/ac/ax/be MIMO	V	V							

**Remark:**

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. 802.11ax/be Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG
			for	for
	Ant 7	Ant 6	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
5925 MHz ~ 6425 MHz	0.87	-1.06	0.87	2.97
6425 MHz ~ 6525 MHz	0.95	-1.20	0.95	2.95
6525 MHz ~ 6875 MHz	1.01	-1.13	1.01	3.02
6875 MHz ~ 7125 MHz	0.73	-1.20	0.73	2.83

Calculation example:

If a device has two antenna, $G_{ANT7} = 0.87$ dBi; $G_{ANT6} = -1.06$ dBi

Directional gain of power measurement = $\max(0.87, -1.06) + 0 = 0.87$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(0.87 \text{ dBi} / 20)} + 10^{(-1.06 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 2.97 \text{ dBi}$$

<For SDM Mode>

SDM mode all transmit signals are completely uncorrelated, then

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)d)ii)

The Directional gain = $10 \cdot \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

Where G1, G2....GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG
			for	for
	Ant 7	Ant 6	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
5925 MHz ~ 6425 MHz	0.87	-1.06	0.87	0.01
6425 MHz ~ 6525 MHz	0.95	-1.20	0.95	0.01
6525 MHz ~ 6875 MHz	1.01	-1.13	1.01	0.07
6875 MHz ~ 7125 MHz	0.73	-1.20	0.73	-0.13

Calculation example:

If a device has two antenna, $G_{ANT7} = 0.87\text{dBi}$; $G_{ANT6} = -1.06\text{dBi}$

Directional gain is derived from formula which is

$$10 \times \log \left\{ \left[10^{(0.87 \text{ dBi} / 10)} + 10^{(-1.06 \text{ dBi} / 10)} \right] / 2 \right\} \\ = 0.01 \text{ dBi}$$

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY (TAF Code: 1190)
Remark	The Contention Based Protocol test items subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH17-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ♦FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦FCC KDB 662911 D01 Multiple Transmitter Output v02r01
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.

The device WIFI MIMO support 1S2T (CDD & Tx Beamforming) (Nss=1) mode & SDM (2S2T :Nss=2) mode by manufacturer declared.

For 802.11a, it does not support SDM & Tx Beamforming so the correlated gain for CDD is applied. For 802.11be mode, in SDM mode the conducted power is set to 3dB higher than TXBF/CDD, Since the maximum array gain for a two antenna system is 3dB so the TXBF/CDD compliance is met by testing SDM mode as worst mode for LPI power mode.

802.11be support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is not greater than CDD&SDM mode, so CDD&SDM mode covers Tx Beamforming mode.

The device supports 1S2T (CDD & Tx Beamforming) and 2S2T (SDM) mode;
1S2T: Nss=1, MIMO 2Tx; 2S2T: Nss=2, MIMO 2Tx.

802.11be support full RU tone and partial RU tone, both full RU and partial are tested for conducted power/PSD in appendix A, for Channel Mask in section 3.4.5, all the other test case were performed with full RU with its maximum power/PSD.

- b. AC power line Conducted Emission was tested under maximum output power.



2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 320M	Channel	31							
	Freq. (MHz)	6105							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	63							
	Freq. (MHz)	6265							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							
BW 320M	Channel	127							
	Freq. (MHz)	6585							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	191							
	Freq. (MHz)	6905							



BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							
BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							
BW 20M	Channel	233							
	Freq. (MHz)	7115							

2.2 Test Mode

This device support 26/52/106/242/484/996/2*996/4*996-tone RU, M-RU and channel puncture.

The PSD of partial RU, M-RU and channel puncture are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel, 996-tone RU is covered by 80MHz channel, 2*996-tone RU is covered by 160MHz channel and 4*996-tone RU is covered by 320MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT 40	MCS0
802.11be EHT 80	MCS0
802.11be EHT 160	MCS0
802.11be EHT 320	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G link + BT Idle with HS3100 BT headset + USB cable data link with Notebook + Scanner + 1.5xBattery + Copy data from NB to EDA(eMMC)
Remark: The detailed Radiated test modes are shown in Appendix C.	

MIMO <Ant. 6+7>

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11a	802.11a	802.11a	802.11a
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	-	233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT20	802.11be EHT20	802.11be EHT20	802.11be EHT20
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	-	-
					233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT40	802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	003	099	123	195
M	Middle	051	-	147	211
H	High	091	107	-	227
Straddle		-	115	187	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT80	802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	007	103	135	199
M	Middle	055		151	-
H	High	087		-	215
Straddle		-	-	183	-



Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT160	802.11be EHT160	802.11be EHT160	802.11be EHT160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT320	802.11be EHT320	802.11be EHT320	802.11be EHT320
L	Low	031	-	-	-
M	Middle	-			
H	High	063			
Straddle		095	127	159	191

This device supports WiFi 7 puncturing and Multi RU features.

80M channel puncturing 20M M-RU_RU484+RU242	1		242	484				
	2	242		484				
	3	484			242			
	4	484	242					
160M channel puncturing 20M M-RU_RU996+RU484+RU242	1		242	484		996		
	2	242		484		996		
	3	484			242	996		
	4	484	242			996		
	5		996			242	484	
	6		996		242		484	
	7		996		484			242
	8		996		484	242		
160M channel puncturing 40M M-RU_RU996+RU484	1			484		996		
	2	484				996		
	3		996				484	
	4		996		484			
320M channel puncturing 40M M-RU_RU484+RU996+RU996+RU996	1			484		996	996	996
	2	484				996	996	996
	3		996			484	996	996
	4		996		484		996	996




	5	996	996		484	996
	6	996	996	484		996
	7	996	996	996		484
	8	996	996	996	484	
320M channel puncturing 80M M-RU_RU996+RU996+RU996	1		996	996		996
	2	996		996		996
	3	996	996			996
	4	996	996	996		
320M channel puncturing 40M+80M M-RU_RU484+RU996+RU996	1		484	996	996	
	2	484		996	996	
	3	996		484	996	
	4	996	484		996	
	5	996	996		484	
	6	996	996	484		
	7			484	996	996
	8		484		996	996
	9		996		484	996
	10		996	484		996
	11		996	996		484
	12		996	996	484	

Remark:

1. Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family.
2. The radiated emission test results for the UNII-5 and UNII-7 bands were reused from the standard power mode measurements, as the standard power mode has a higher output power level.

2.3 Connection Diagram of Test System

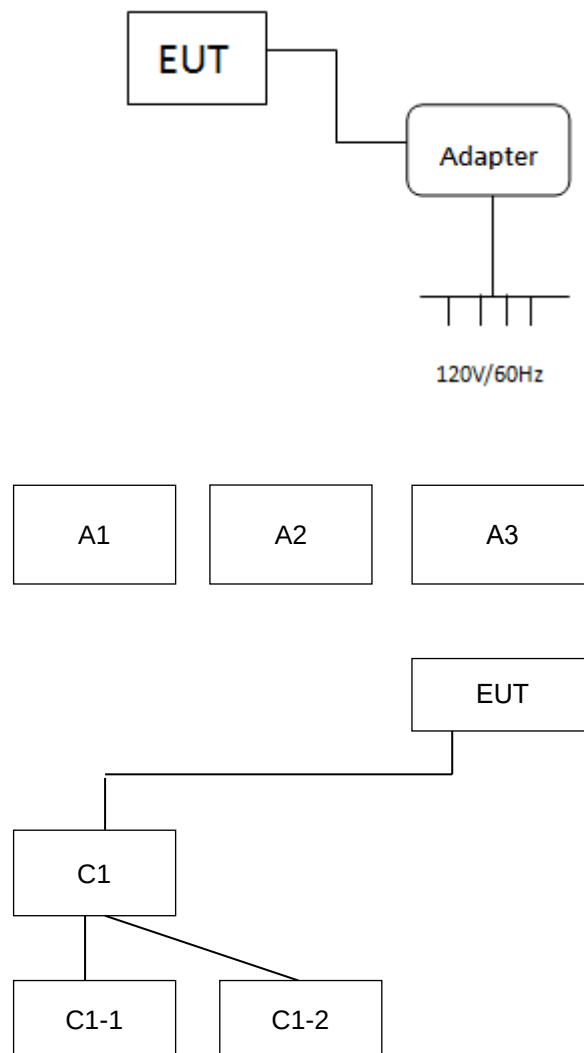

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1						
A1	BT Earphone	Bluetooth	X						
A2	AP router	WiFi	X						
A3	Bar code	scanner	X						
No.	Power Source	Connection Type	1						
No.	Setup Peripherals	Connection Type	1						
C1	Notebook	USB Cable	X						
C1-1	iPod	USB Cable to C1	X						
C1-2	AP router	RJ-45 Cable to C1	X						

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	iPod	Apple	A1199	DoC	Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.1 Version 4.0.170.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

For EIRP output power:

The EIRP output power result is derived from RF conducted power plus directional antenna gain.

EIRP = RF conducted power + directional antenna gain.

Following shows an offset computation example with conducted power 20.2 dBm and directional antenna gain 3dBi.

$$\begin{aligned} \text{EIRP(dBm)} &= \text{RF conducted power(dBm)} + \text{directional antenna gain(dBi)}. \\ &= 20.2 + 3 = 23.2 \text{ (dBm)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

(a)(11) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

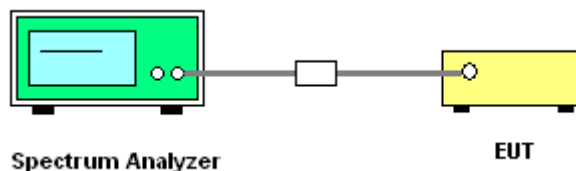

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

Note: The EBW spectrum setting is as following table for different nominal bandwidth.

setting	20MHz	40MHz	80MHz	160MHz	320MHz
RBW	500kHz	1MHz	2MHz	2MHz	5MHz
VBW	2MHz	3MHz	10MHz	10MHz	5MHz

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

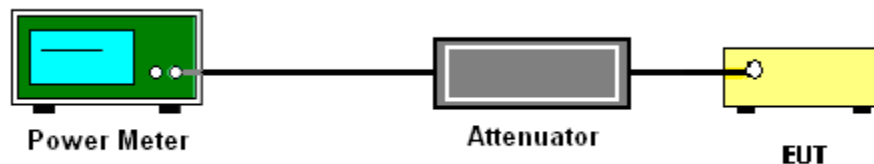

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.

3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

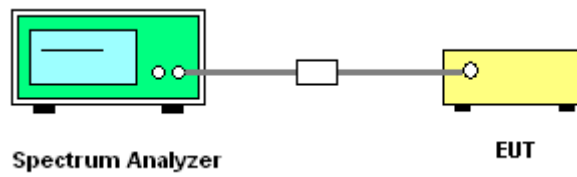

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

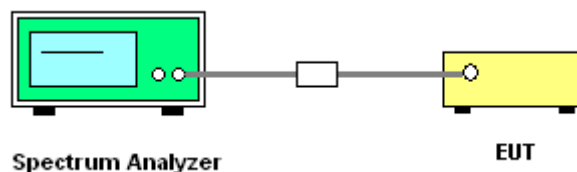

3.4.5 Test Result

Please refer to Appendix A.

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

(d)(6)All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

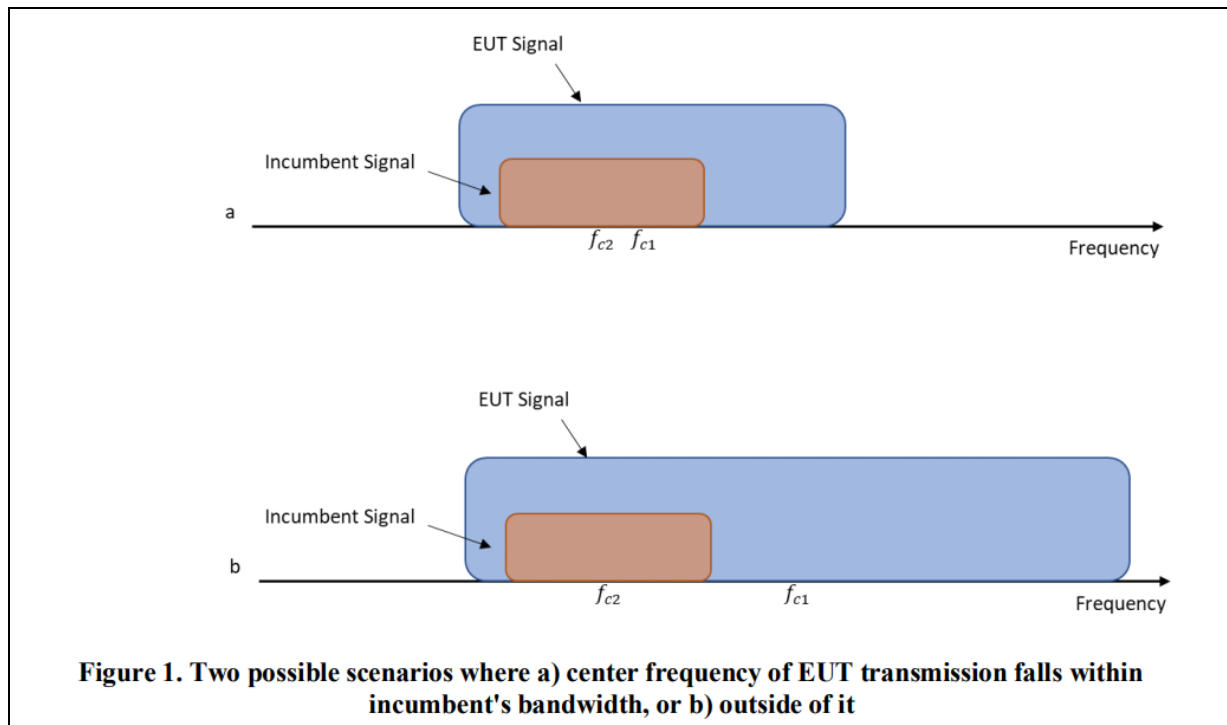

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.


Section I) Contention Based Protocol

Conducted method Step-by-Step Procedure, Conducted Setup

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in test setup Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in test setup Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.

9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
12. For the contention-based protocol test where only one channel in each supported sub-band needs to be tested. The narrowest and widest bandwidth in each channel shall be measured EUT was driven in MIMO mode, the interferer level was injected to both chains to monitor the performance, while the interferer level is determined according the lowest antenna gain among both antennas (i.e, lower interferer level).

3.5.4 Test Setup

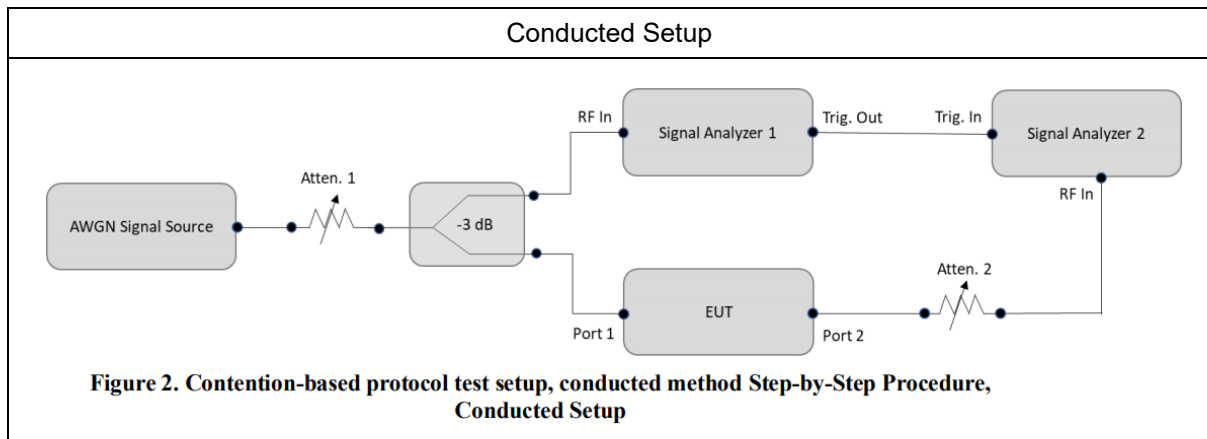

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Rohde & Schwarz	SMW200A	100KHz~7.5GHz
Spectrum Analyzer	Rohde & Schwarz	FSV3044	10Hz~44GHz
Companion Device (AP)	WLAN AP	ASUS	RT-BE96U
Terminal (NB Server)	Acer	N15C1	LAN

3.5.6 Minimum Antenna gain for Contention Based Protocol Test

Antenna Gain	<UNII-5>: -1.06 dBi <UNII-6>: -1.20 dBi <UNII-7>: -1.13 dBi <UNII-8>: -1.20 dBi
--------------	--



3.5.7 Test Summary of Contention Based Protocol Test

Test Engineer :	Kai Liao	Temperature :	20.1~22.7°C
		Relative Humidity :	47.6~54.7%

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-74.46	100	-62	-73.40	11.40
				Result: Stop Transmission				
				-79.46	< 90	-62	-78.40	16.40
				Result: Minimal Operation				
				-80.46	0	-62	-79.40	17.40
				Result: Normal Operation				
	6265	320	5950	-73.23	100	-62	-72.17	10.17
				Result: Stop Transmission				
				-76.23	< 90	-62	-75.17	13.17
				Result: Minimal Operation				
				-77.23	0	-62	-76.17	14.17
				Result: Normal Operation				
			6105	-70.27	100	-62	-69.21	7.21
				Result: Stop Transmission				
				-72.27	< 90	-62	-71.21	9.21
				Result: Minimal Operation				
				-73.27	0	-62	-72.21	10.21
				Result: Normal Operation				
			6260	-72.12	100	-62	-71.06	9.06
				Result: Stop Transmission				
				-75.12	< 90	-62	-74.06	12.06
				Result: Minimal Operation				
				-76.12	0	-62	-75.06	13.06
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (-1.06 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-73.42	100	-62	-72.22	10.22
					Result: Stop Transmission			
				-79.42	< 90	-62	-78.22	16.22
					Result: Minimal Operation			
				-80.42	0	-62	-79.22	17.22
					Result: Normal Operation			
	6425	320	6270	-71.57	100	-62	-70.37	8.37
					Result: Stop Transmission			
				-76.57	< 90	-62	-75.37	13.37
					Result: Minimal Operation			
				-77.57	0	-62	-76.37	14.37
					Result: Normal Operation			
			6425	-69.47	100	-62	-68.27	6.27
					Result: Stop Transmission			
				-74.47	< 90	-62	-73.27	11.27
					Result: Minimal Operation			
				-75.47	0	-62	-74.27	12.27
					Result: Normal Operation			
			6580	-73.18	100	-62	-71.98	9.98
					Result: Stop Transmission			
				-79.68	< 90	-62	-78.48	16.48
					Result: Minimal Operation			
				-80.68	0	-62	-79.48	17.48
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (-1.2 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-73.32	100	-62	-72.19	10.19
					Result: Stop Transmission			
				-79.32	< 90	-62	-78.19	16.19
					Result: Minimal Operation			
				-80.32	0	-62	-79.19	17.19
					Result: Normal Operation			
	6745	320	6590	-74.07	100	-62	-72.87	10.87
					Result: Stop Transmission			
				-79.57	< 90	-62	-78.37	16.37
					Result: Minimal Operation			
				-80.57	0	-62	-79.37	17.37
					Result: Normal Operation			
			6745	-70.58	100	-62	-69.38	7.38
					Result: Stop Transmission			
				-77.58	< 90	-62	-76.38	14.38
					Result: Minimal Operation			
				-78.58	0	-62	-77.38	15.38
					Result: Normal Operation			
			6900	-72.59	100	-62	-71.39	9.39
					Result: Stop Transmission			
				-79.59	< 90	-62	-78.39	16.39
					Result: Minimal Operation			
				-80.59	0	-62	-79.39	17.39
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (-1.13 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-72.72	100	-62	-71.52	9.52
					Result: Stop Transmission			
				-78.72	< 90	-62	-77.52	15.52
					Result: Minimal Operation			
				-79.72	0	-62	-78.52	16.52
					Result: Normal Operation			
	6905	320	6750	-70.62	100	-62	-69.42	7.42
					Result: Stop Transmission			
				-74.62	< 90	-62	-73.42	11.42
					Result: Minimal Operation			
				-75.62	0	-62	-74.42	12.42
					Result: Normal Operation			
			6905	-68.55	100	-62	-67.35	5.35
					Result: Stop Transmission			
				-74.55	< 90	-62	-73.35	11.35
					Result: Minimal Operation			
				-75.55	0	-62	-74.35	12.35
					Result: Normal Operation			
			7060	-69.55	100	-62	-68.35	6.35
					Result: Stop Transmission			
				-75.55	< 90	-62	-74.35	12.35
					Result: Minimal Operation			
				-76.55	0	-62	-75.35	13.35
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (-1.2 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.




CBP verify with frequency domain plots


The device does not support channel puncturing with regards to Contention Based Protocol.

The entire bandwidth 320MHz stops transmission after the incumbent signal appears.


Before incumbent injected on 80MHz channel

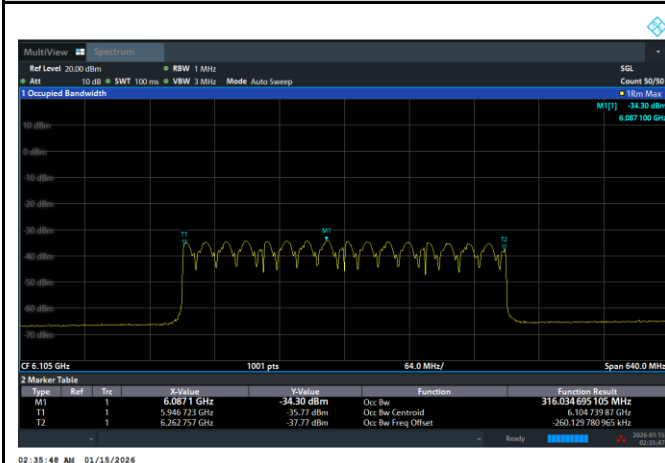


After 10MHz incumbent injected on center of channel, the entire 320MHz bandwidth stops transmission.

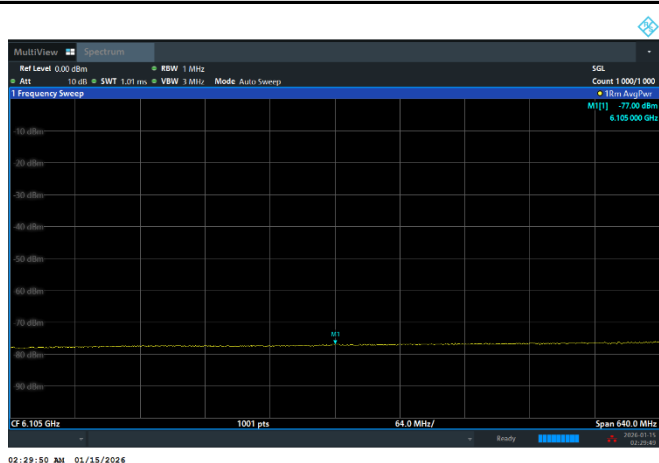

After 10MHz incumbent injected on bottom of channel, the EUT bandwidth is reduced from 320MHz to 80MHz first, then changes to a new 320MHz channel.




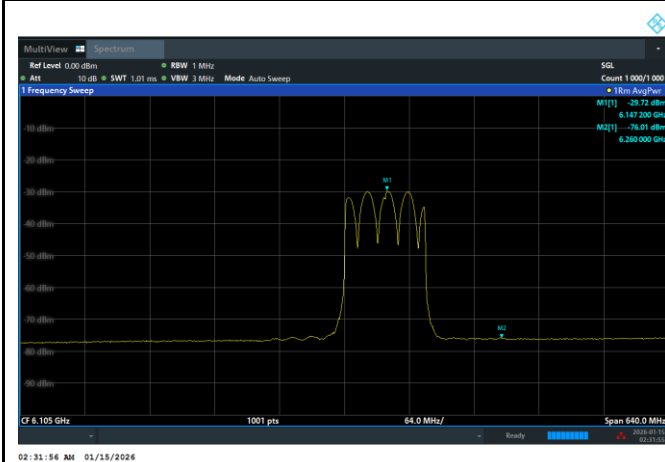


After 10MHz incumbent injected on top of channel, the EUT bandwidth is reduced from 320MHz to 160MHz first, then changes to a new 320MHz channel

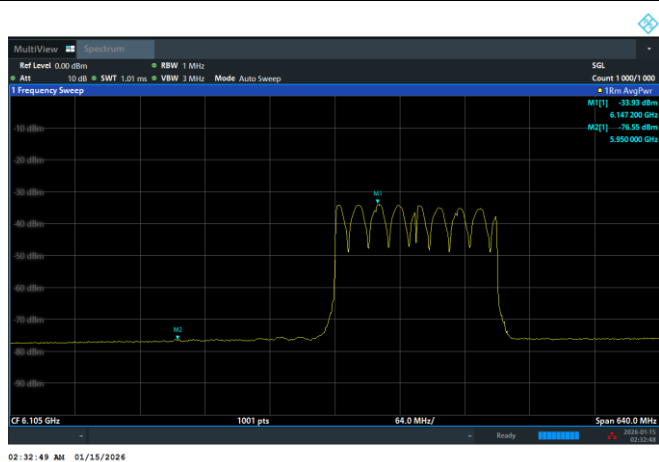




3.5.8 Test Plots of Contention Based Protocol Test

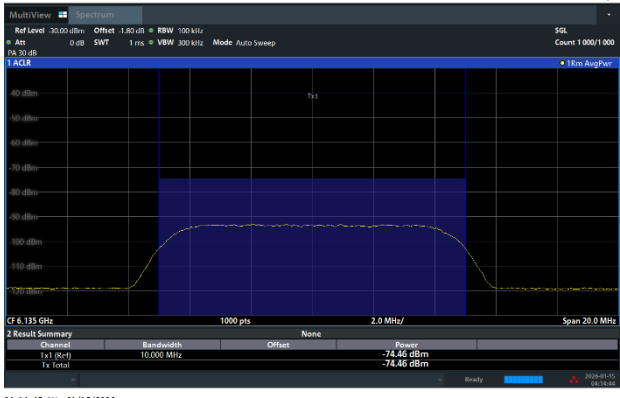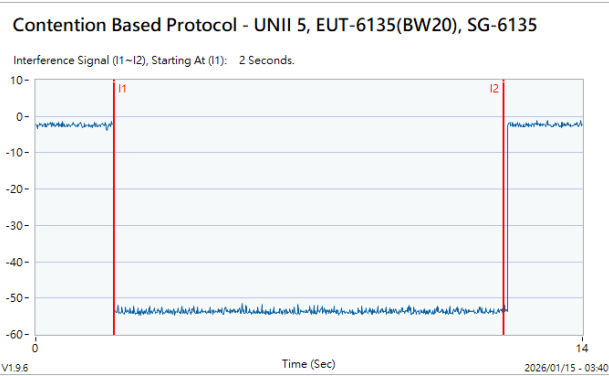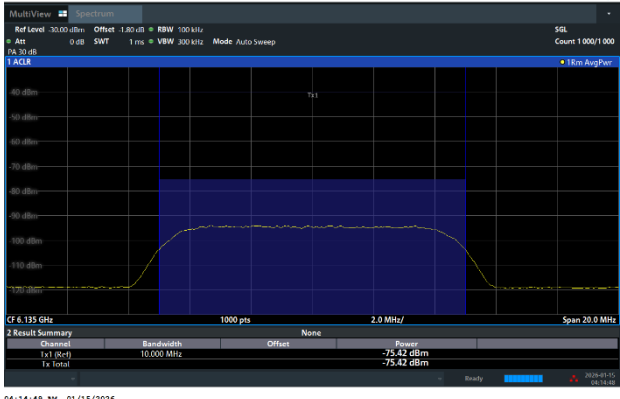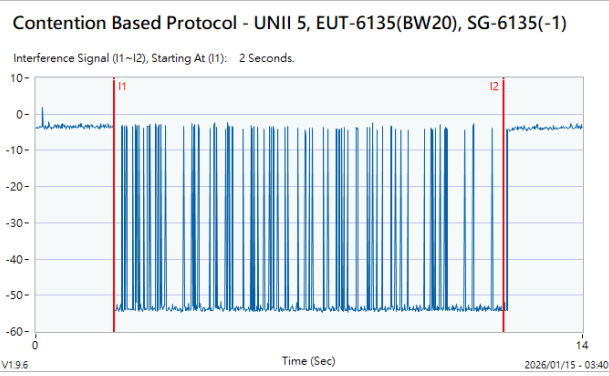Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)	
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -74.46dBm 	802.11ax (HE20) / CH37 Test result is pass due to no transmission occur. 
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -75.42dBm 	802.11ax (HE20) / CH37 Transmit when the interferer is 1dB lower. 

**Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)**


802.11ax (HE320) / 5950MHz (Lower edge)
Threshold Level (TL) = -73.23

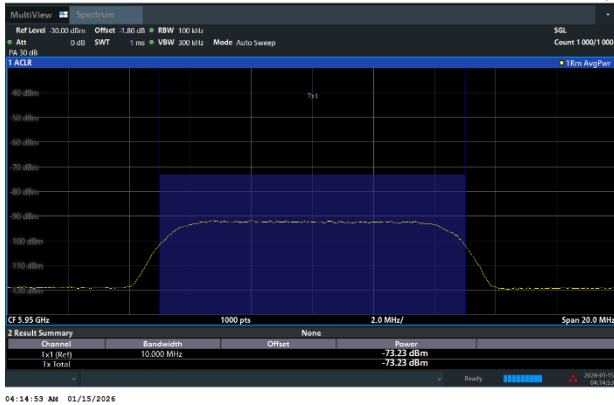


802.11ax (HE320) / CH31 (Lower edge)
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-5950

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

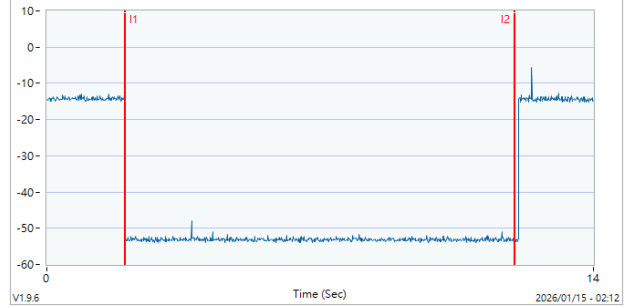


802.11ax (HE320) / 5950MHz (Lower edge)
Threshold Level (TL) = -74.25dBm

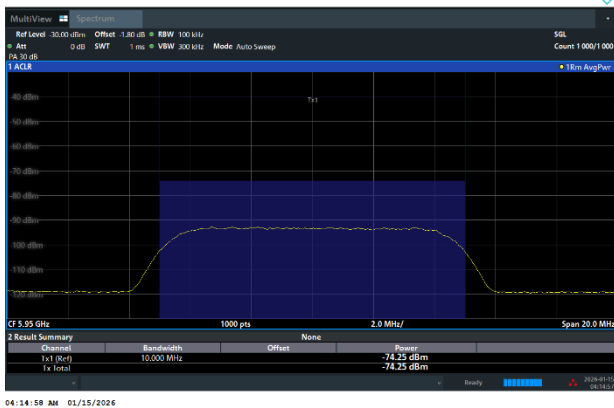

802.11ax (HE320) / CH31 (Lower edge)
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-5950(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

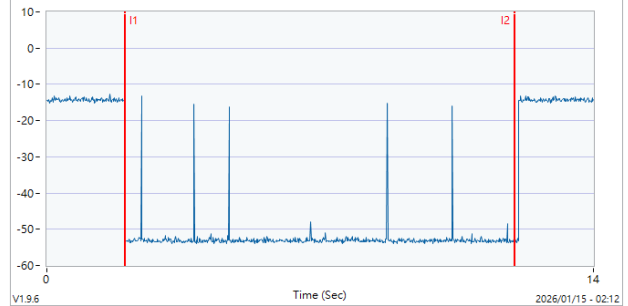


**Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)**


802.11ax (HE320) / 6105MHz (Middle)
Threshold Level (TL) = -70.27dBm

802.11ax (HE320) / CH31 (Middle)

Test result is pass due to no transmission occur.

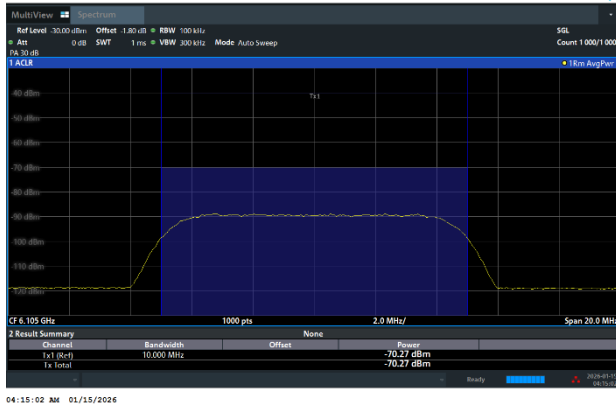**Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-6105**


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

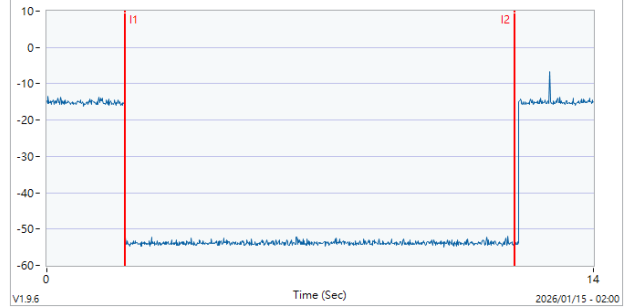


802.11ax (HE320) / 6265MHz (Middle)
Threshold Level (TL) = -71.24dBm

802.11ax (HE320) / CH31 (Middle)

Transmit when the interferer is 1dB lower.

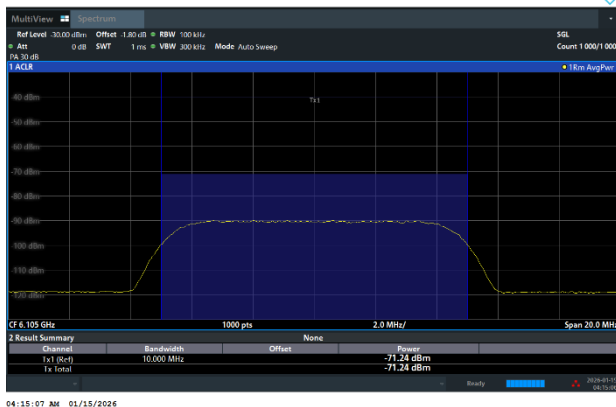**Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-6105(-1)**

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

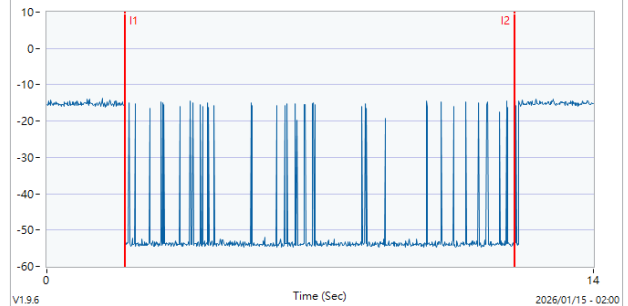




Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE320) / 6260MHz (Upper edge)

Threshold Level (TL) = -72.12dBm

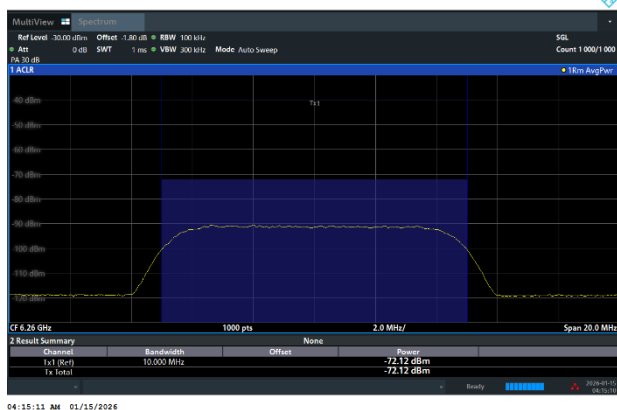


04:15:11 AM 01/15/2026

802.11ax (HE320) / CH31 (Upper edge)

Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-6260

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

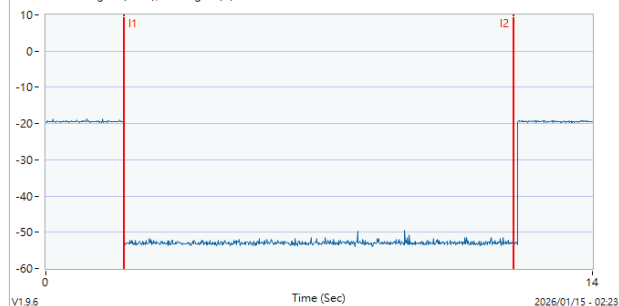


V19.6

2026/01/15 - 02:23

802.11ax (HE320) / 6420MHz (Upper edge)

Threshold Level (TL) = -73.12dBm

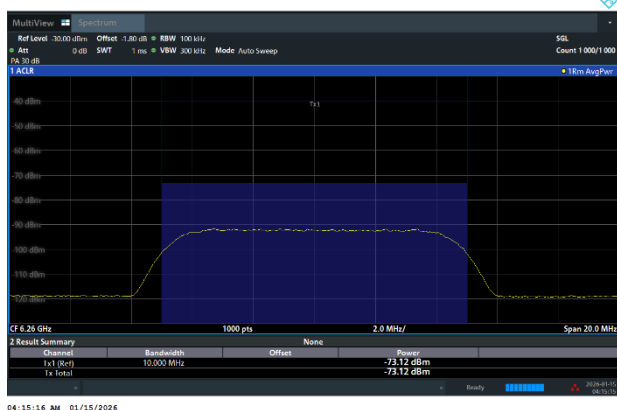


04:15:16 AM 01/15/2026

802.11ax (HE320) / CH31 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5, EUT-6105(BW320), SG-6260(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

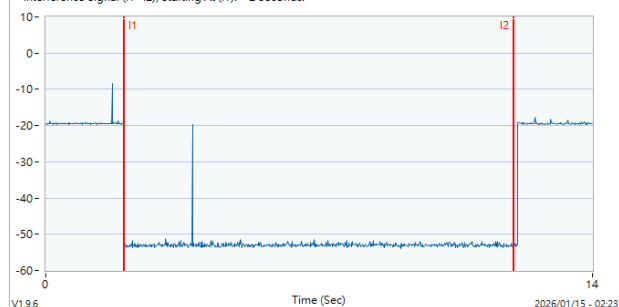


V19.6

2026/01/15 - 02:23

**Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)**


802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -73.42dBm

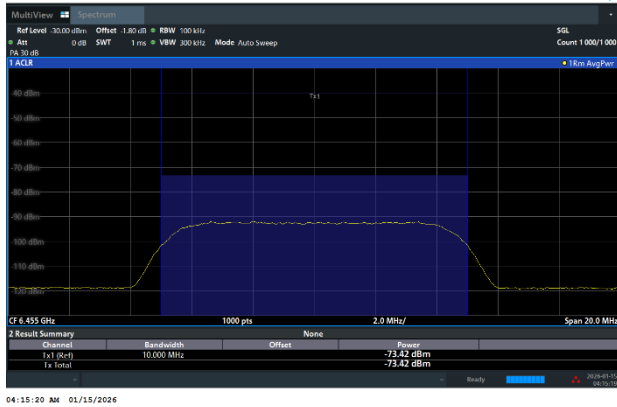

802.11ax (HE20) / CH101
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

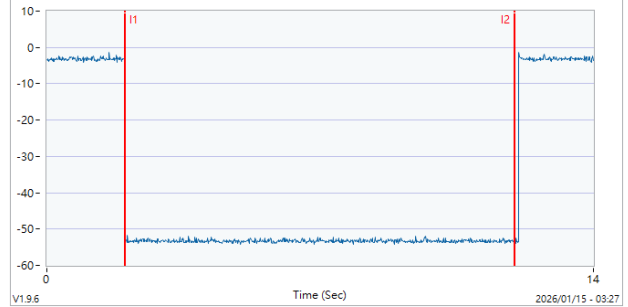

802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -74.43dBm




802.11ax (HE20) / CH101

Transmit when the interferer is 1dB lower.


Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

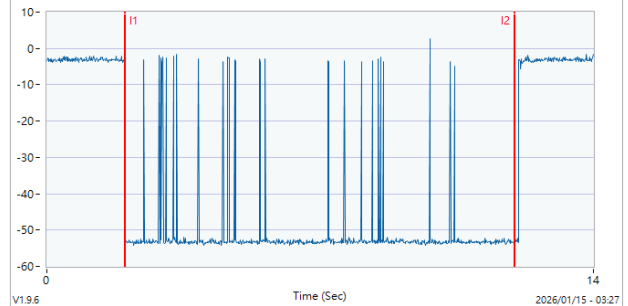

**Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)**


802.11ax (HE320) / 6270MHz (Lower edge)
Threshold Level (TL) = -71.57dBm

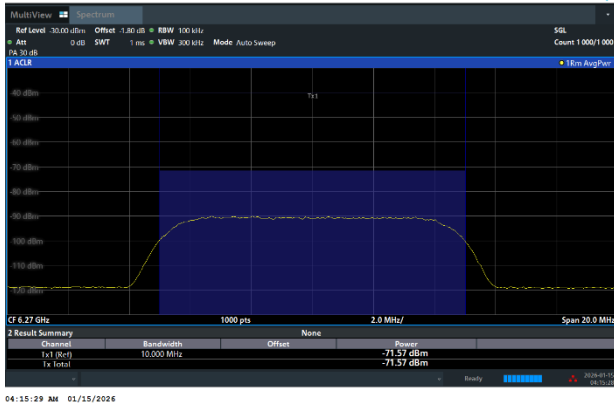


802.11ax (HE320) / CH127 (Lower edge)
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6270

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

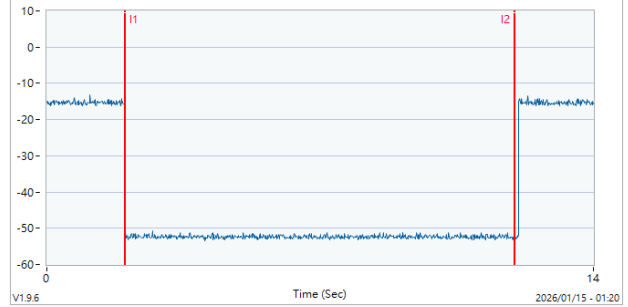


802.11ax (HE320) / 6270MHz (Lower edge)
Threshold Level (TL) = -72.59dBm

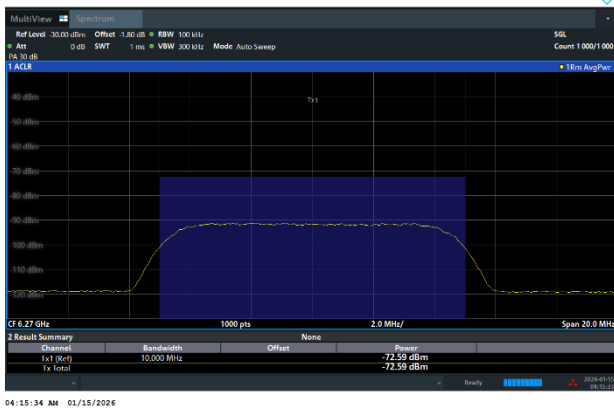

802.11ax (HE320) / CH127 (Lower edge)
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6270(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

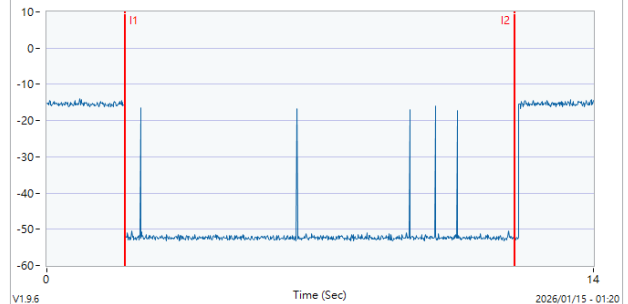



Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)


802.11ax (HE320) / 6425MHz (Middle)
Threshold Level (TL) = -69.74dBm

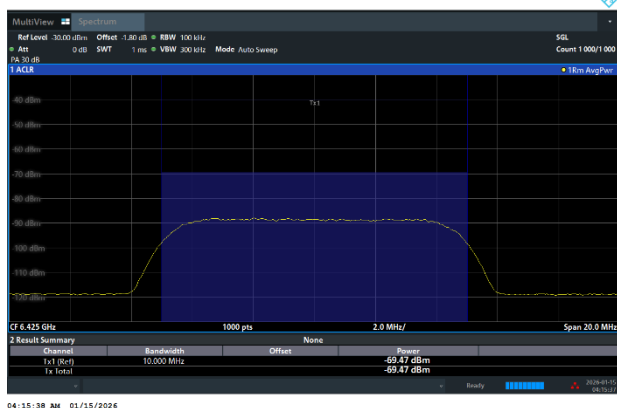


802.11ax (HE320) / CH127 (Middle)
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6425

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

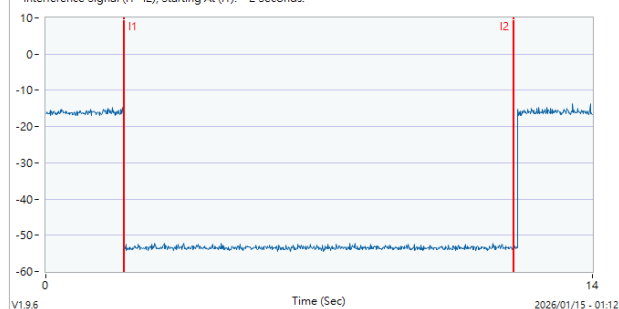


802.11ax (HE320) / 6585MHz (Middle)
Threshold Level (TL) = -70.49dBm

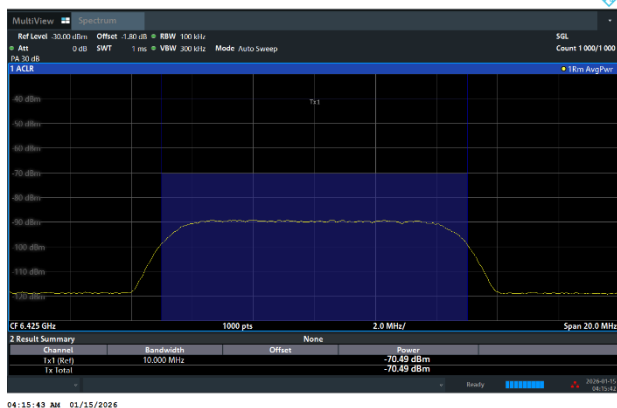

802.11ax (HE320) / CH127 (Middle)
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6425(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

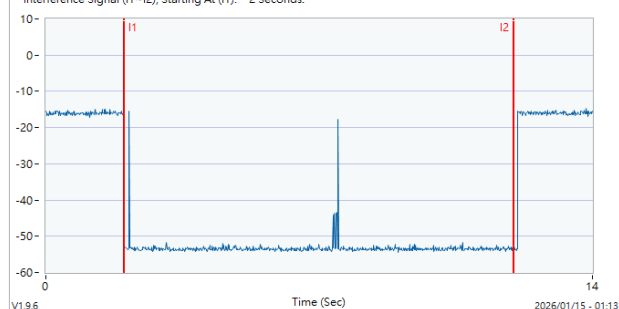



Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)


802.11ax (HE320) / 6580MHz (Upper edge)
Threshold Level (TL) = -73.18dBm

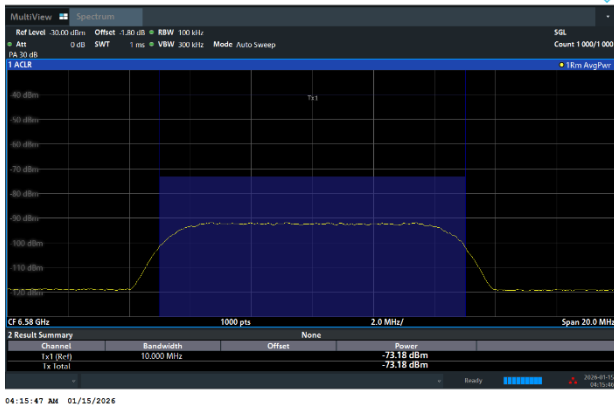

802.11ax (HE320) / CH127 (Upper edge)
Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6580

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

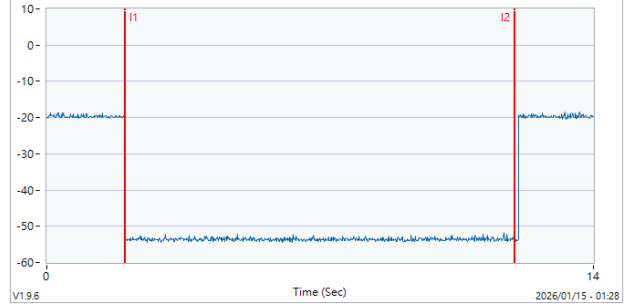

CBP6580


802.11ax (HE320) / 6740MHz (Upper edge)
Threshold Level (TL) = -74.15dBm

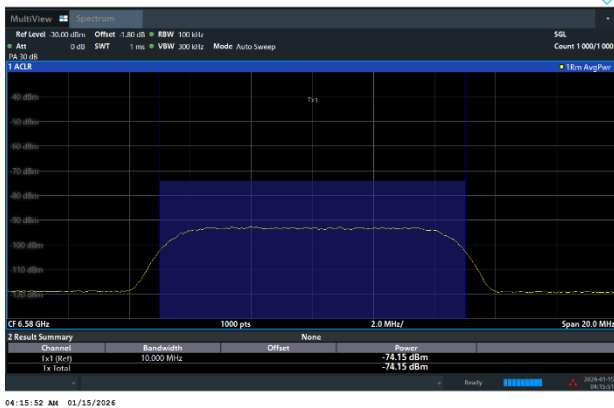

802.11ax (HE320) / CH127 (Upper edge)
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5~7, EUT-6425(BW320), SG-6580(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

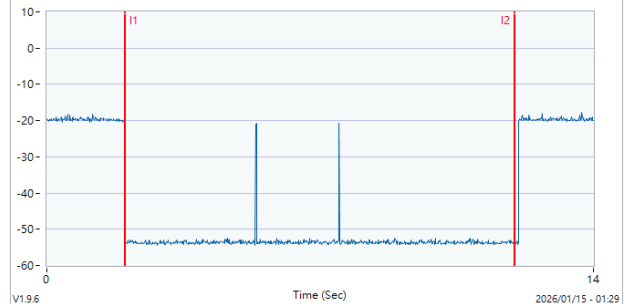



Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)


802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -73.32dBm

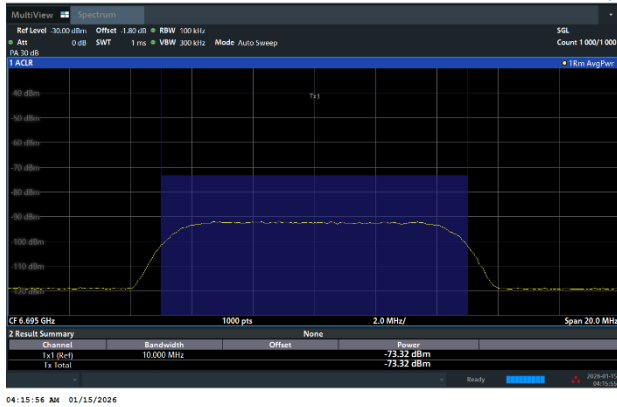


802.11ax (HE20) / CH149
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 7, EUT-6695(BW20), SG-6695

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

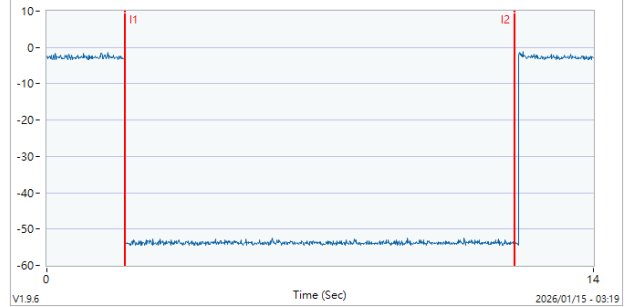


802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -74.33dBm

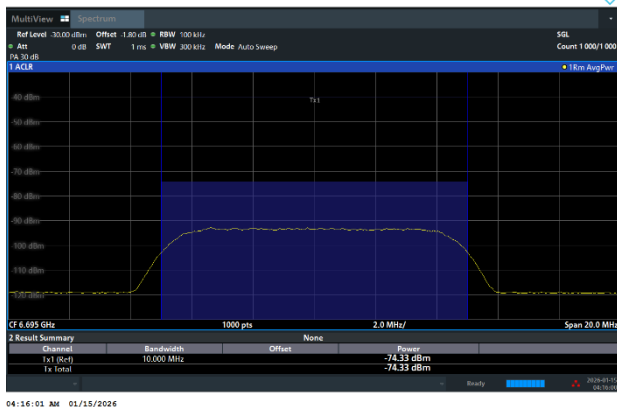

802.11ax (HE20) / CH149
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7, EUT-6695(BW20), SG-6695(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

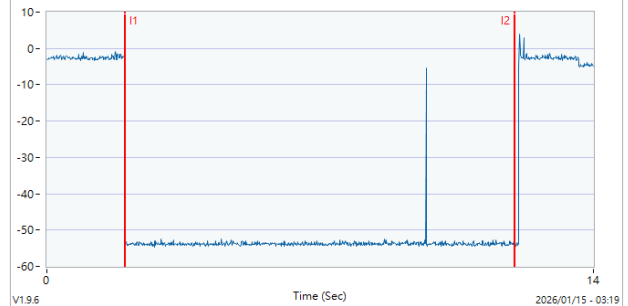




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE320) / 6590MHz (Lower edge)

Threshold Level (TL) = -74.07dBm

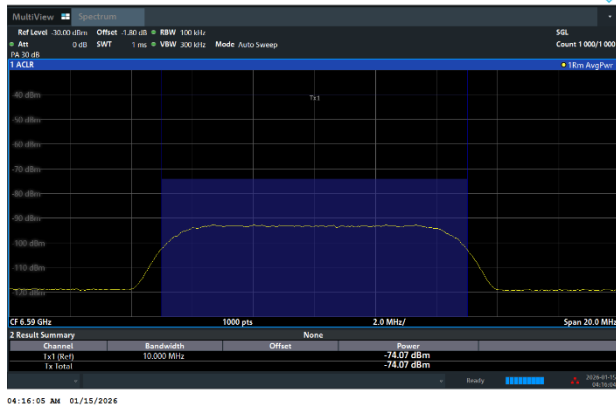


802.11ax (HE320) / CH159 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6590

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

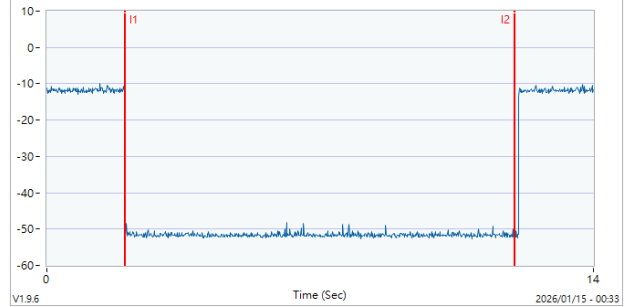

802.11ax (HE320) / 6590MHz (Lower edge)

Threshold Level (TL) = -75.09dBm

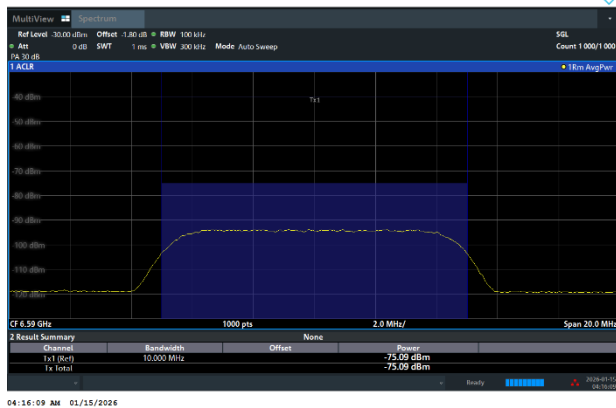


802.11ax (HE320) / CH159 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6590(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

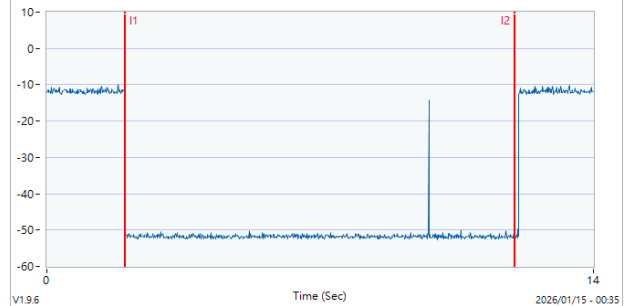


**Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)**

802.11ax (HE320) / 6745MHz (Middle)
Threshold Level (TL) = -70.58dBm

802.11ax (HE320) / CH159 (Middle)
Test result is pass due to no transmission occur.

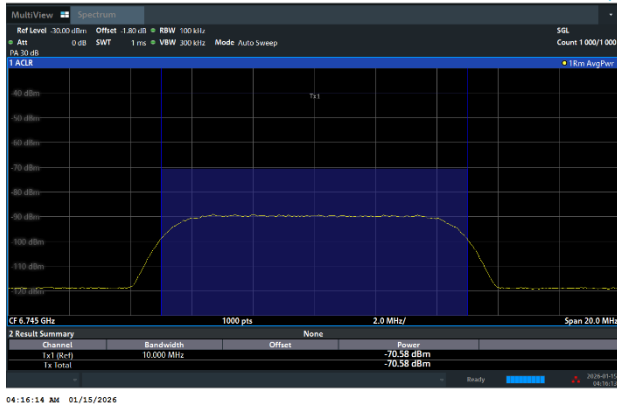
**Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6745**

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

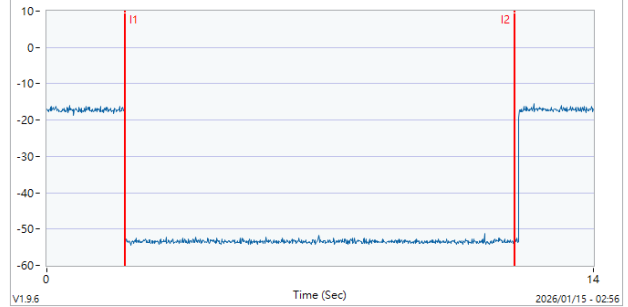


802.11ax (HE320) / 6745MHz (Middle)
Threshold Level (TL) = -71.58dBm

802.11ax (HE320) / CH159 (Middle)
Transmit when the interferer is 1dB lower.

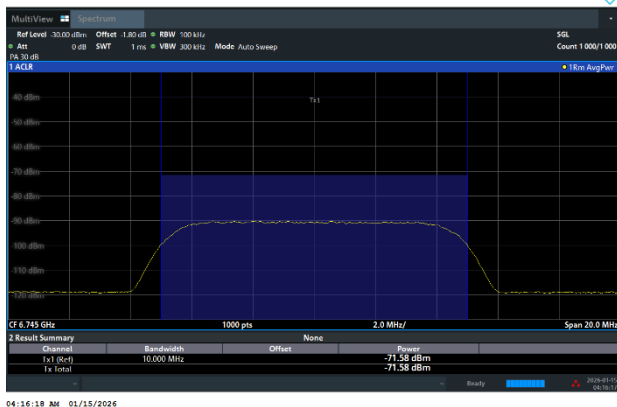**Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6745(-1)**

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

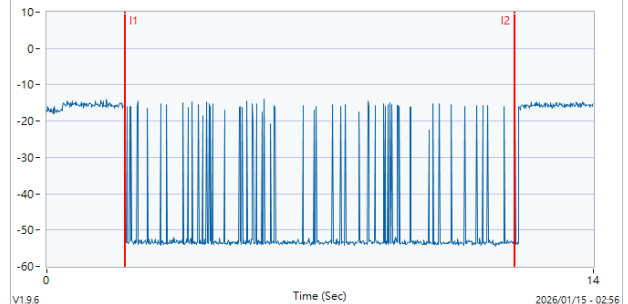




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE320) / 6900MHz (Upper edge)

Threshold Level (TL) = -72.59dBm

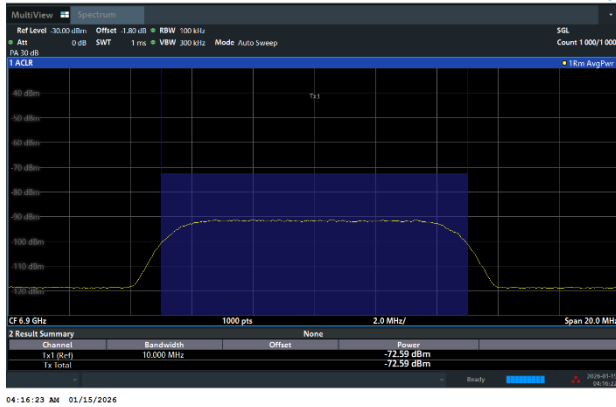


802.11ax (HE320) / CH159 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6900

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

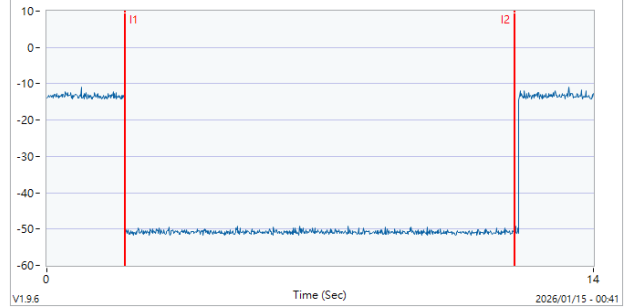

802.11ax (HE320) / 6900MHz (Upper edge)

Threshold Level (TL) = -73.58dBm

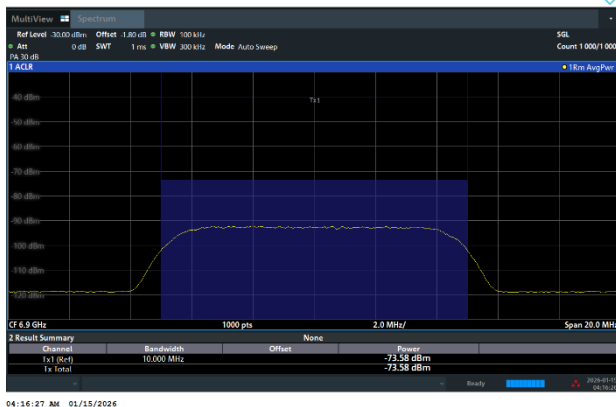


802.11ax (HE320) / CH159 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7&8, EUT-6745(BW320), SG-6900(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

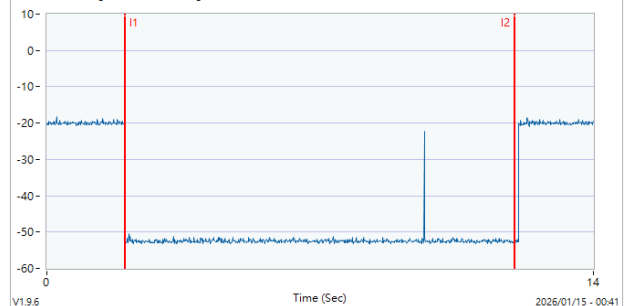



Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -72.72dBm

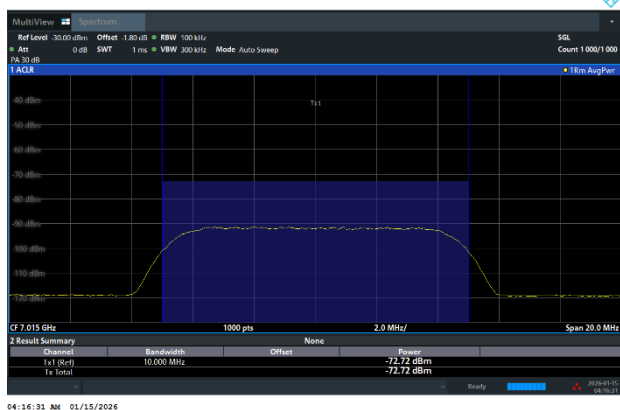


04:16:31 AM 01/15/2026

802.11ax (HE20) / CH213
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

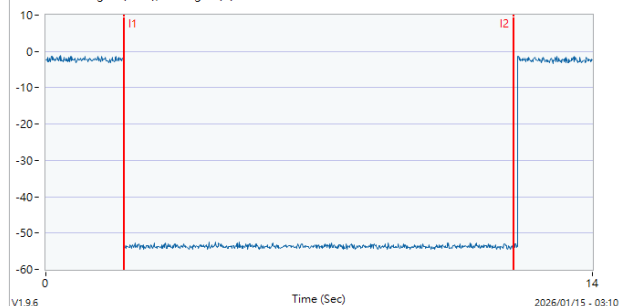

V1.9.6

2026/01/15 - 03:10

802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -73.75dBm

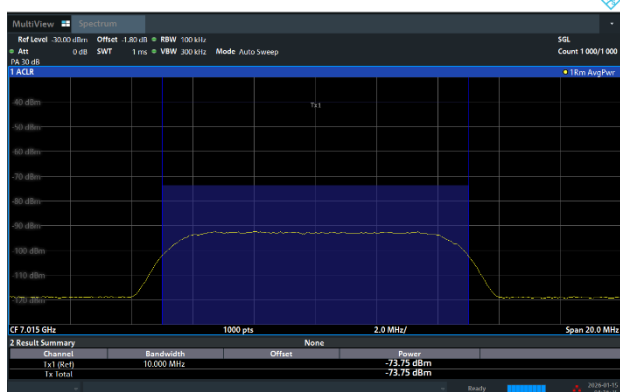


04:16:36 AM 01/15/2026

802.11ax (HE20) / CH213
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

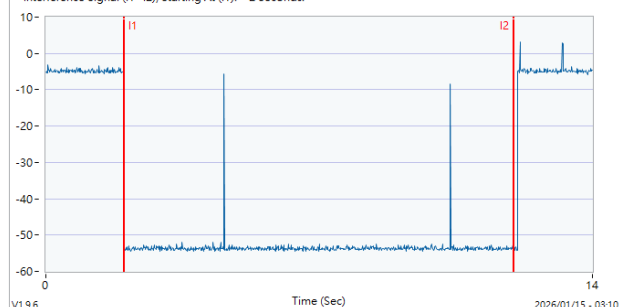

V1.9.6


2026/01/15 - 03:10



Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE320) / 6750MHz (Lower edge)

Threshold Level (TL) = -70.62dBm

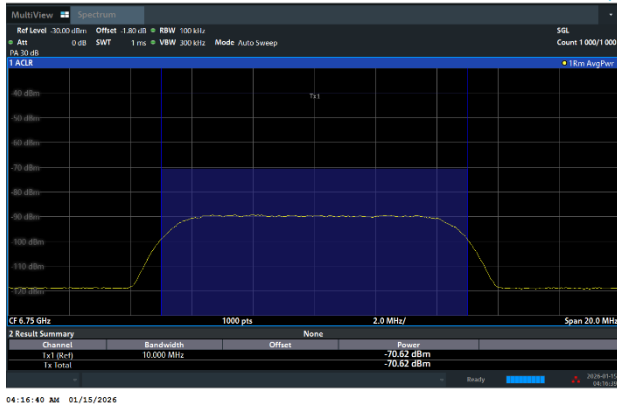


802.11ax (HE320) / CH191 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-6750

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

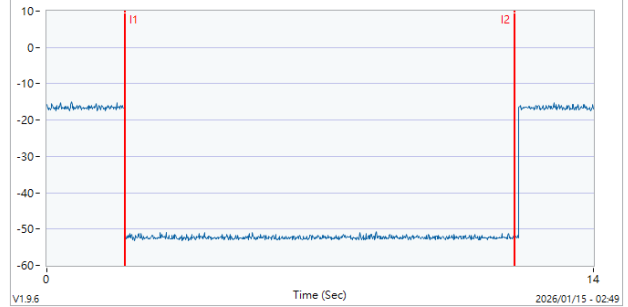

802.11ax (HE320) / 6750MHz (Lower edge)

Threshold Level (TL) = -71.66dBm

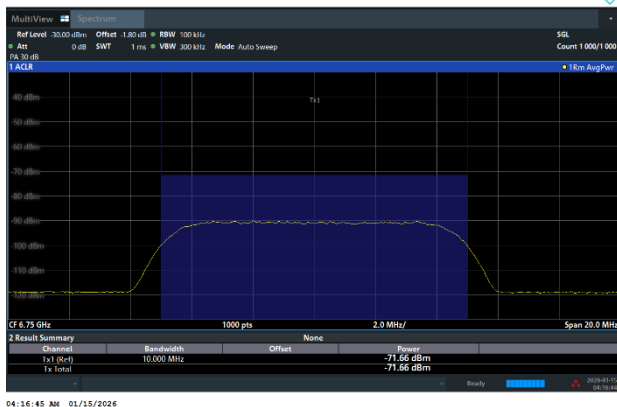


802.11ax (HE320) / CH191 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-6750(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

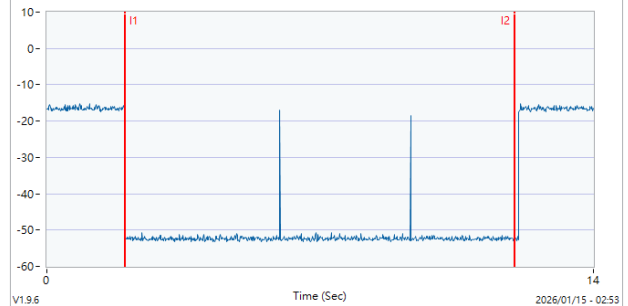



Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)


802.11ax (HE320) / 6905MHz (Middle)
Threshold Level (TL) = -68.55dBm

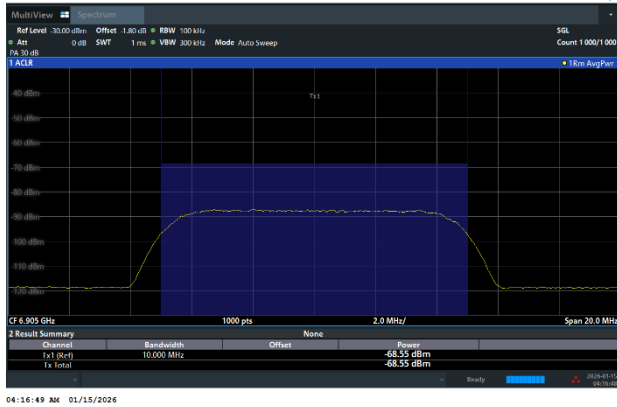


802.11ax (HE320) / CH191 (Middle)
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-6905

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

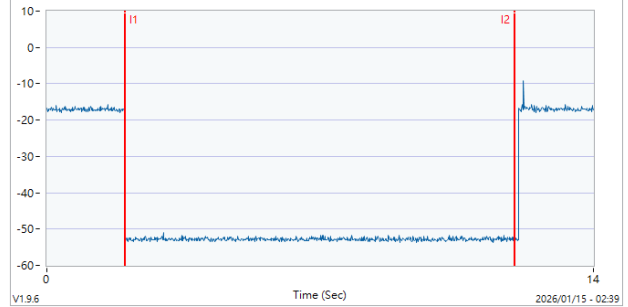


802.11ax (HE320) / 6905MHz (Middle)
Threshold Level (TL) = -69.56dBm

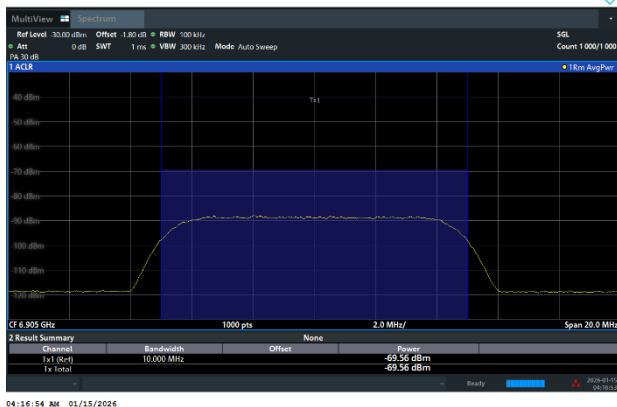

802.11ax (HE320) / CH191 (Middle)
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-6905(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

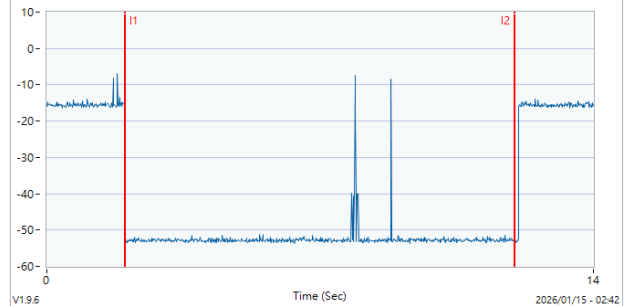




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE320) / 7060MHz (Upper edge)

Threshold Level (TL) = -69.55dBm

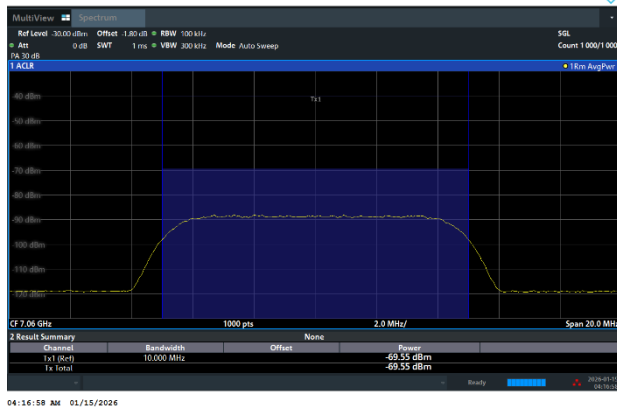


802.11ax (HE320) / CH191 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-7060

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

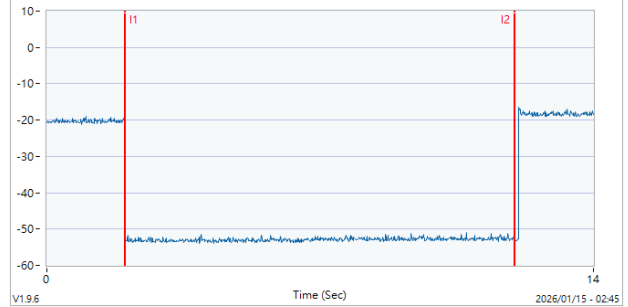

802.11ax (HE320) / 7060MHz (Upper edge)

Threshold Level (TL) = -70.53dBm

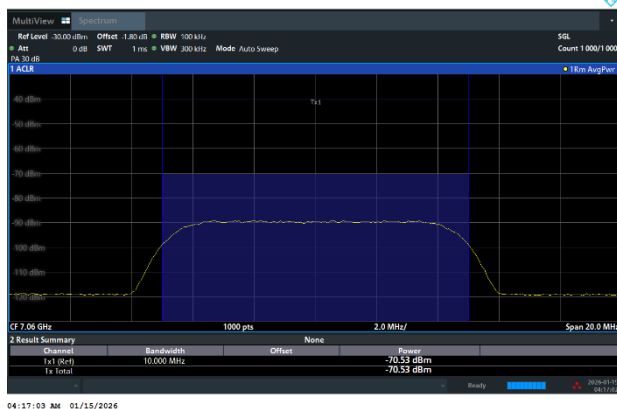


802.11ax (HE320) / CH191 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7&8, EUT-6905(BW320), SG-7060(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

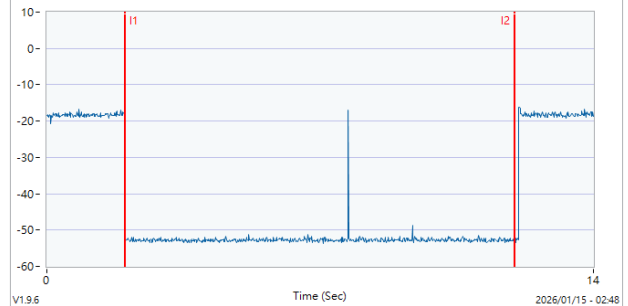

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.2 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v03 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.3 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.6.4 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

3.6.5 Test Setup


For radiated emissions below 30MHz

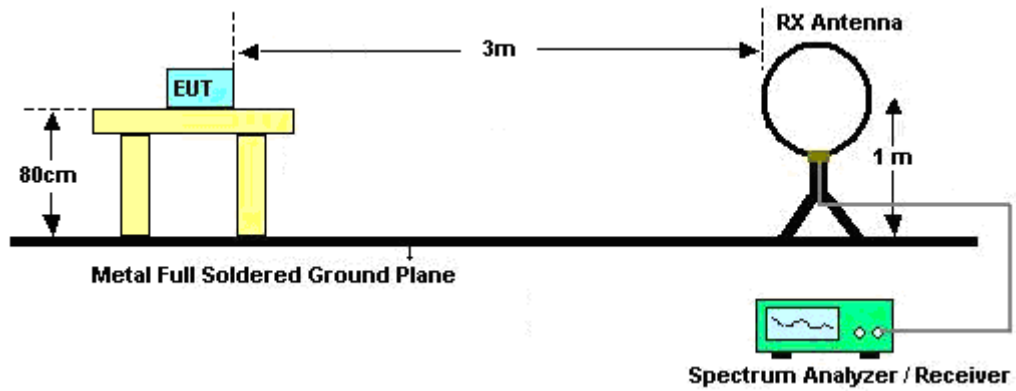


For radiated emissions from 30MHz to 1GHz

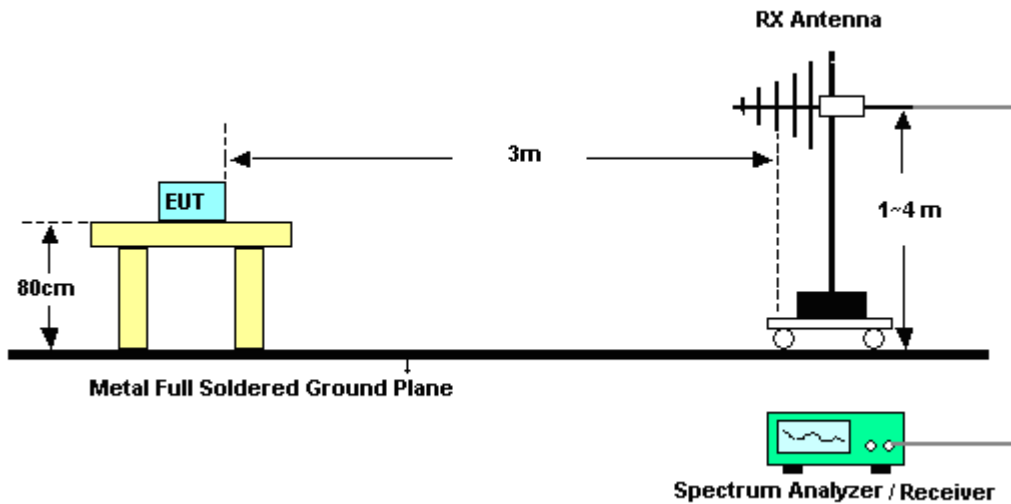

For radiated test from 1GHz to 18GHz

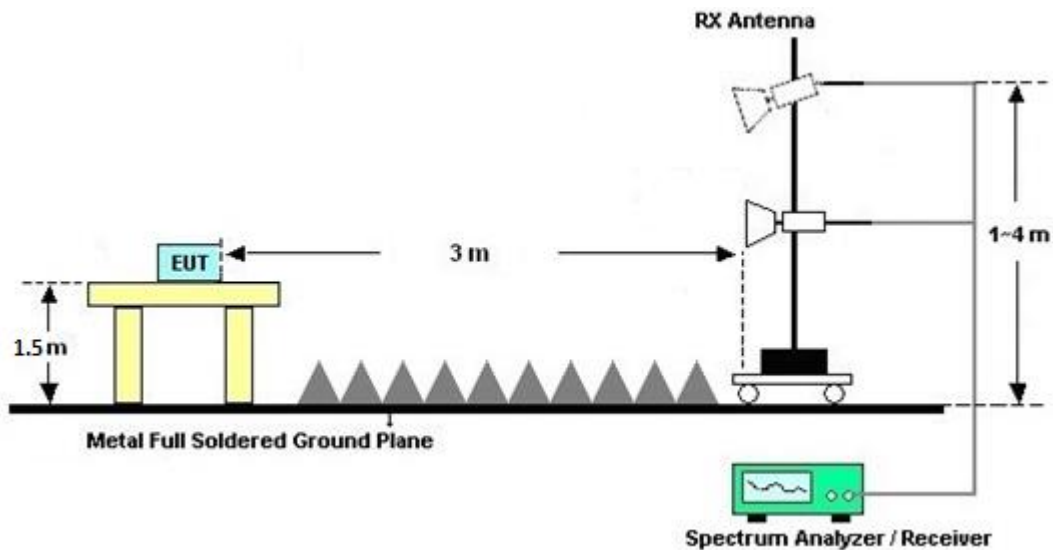

For radiated test above 18GHz

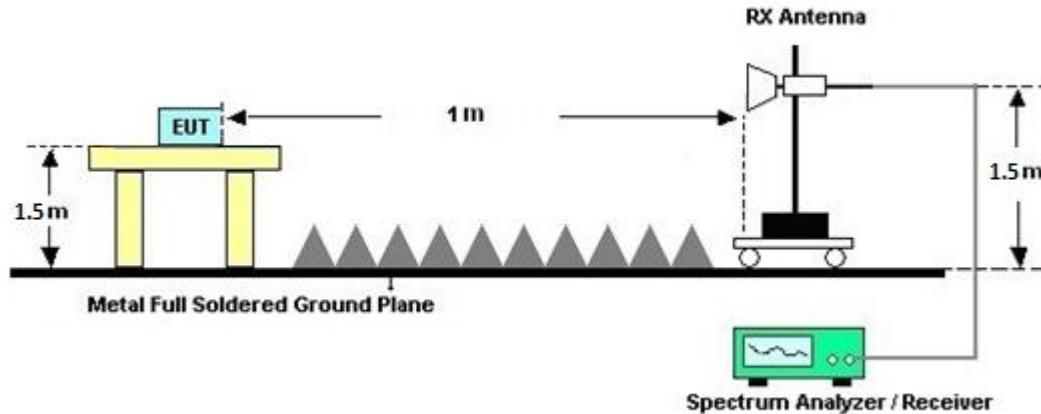

3.6.6 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.6.8 Duty Cycle

Please refer to Appendix D.

3.6.9 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

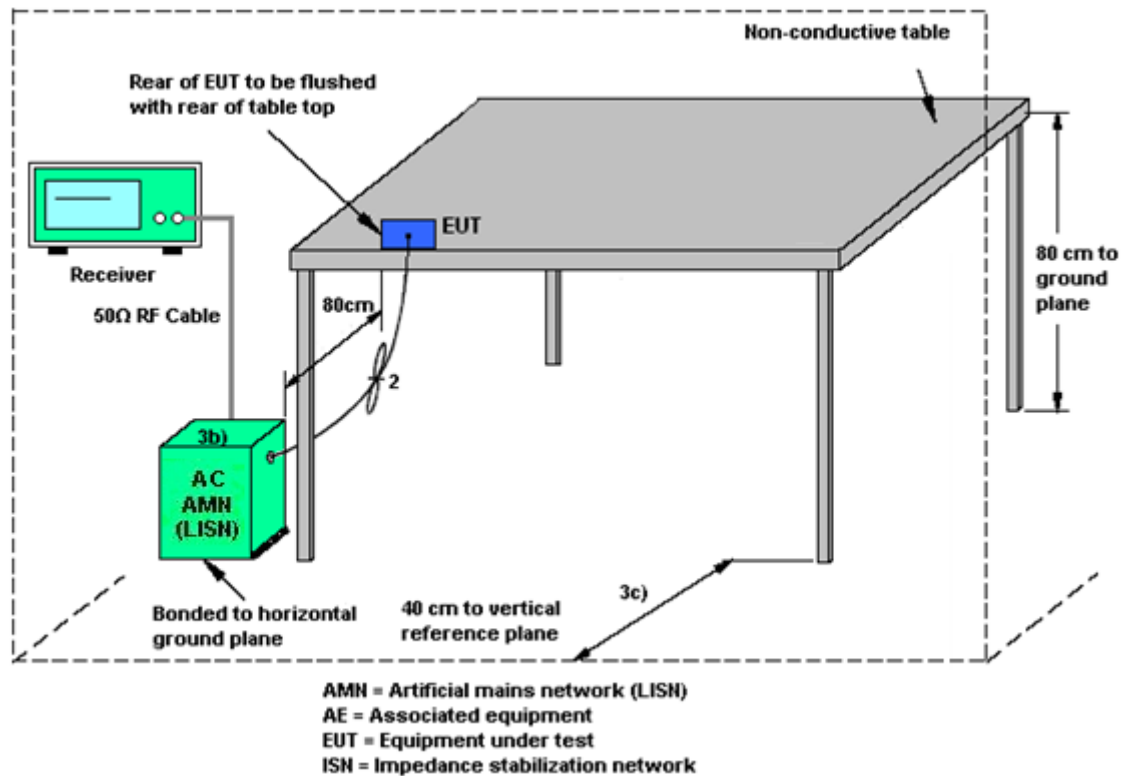

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.8 Antenna Requirements

3.8.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 18, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 18, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2025	Dec. 18, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Dec. 18, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Dec. 18, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Dec. 18, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Dec. 18, 2025	Feb. 12, 2026	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 15, 2025~Jan. 17, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-23010013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Dec. 15, 2025~Jan. 17, 2026	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 15, 2025~Jan. 17, 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 15, 2025~Jan. 17, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 15, 2025~Jan. 17, 2026	N/A	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 21, 2025~Jan. 28, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-23010013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Dec. 21, 2025~Jan. 28, 2026	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 21, 2025~Jan. 28, 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 21, 2025~Jan. 28, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 21, 2025~Jan. 28, 2026	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator (Interferer)	Rohde & Schwarz	SMW200A	111391	100kHz~7.5GHz	Dec. 31, 2025	Jan. 14,2026~ Jan. 15,2026	Dec. 30, 2026	CBP (DF02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101550	10Hz~13.6GHz	Dec. 26, 2025	Jan. 14,2026~ Jan. 15,2026	Dec. 25, 2026	CBP (DF02-HY)
Power Divider	Woken	3Way SMA Power Divider Rated to 20W	STI08-0010(#4)	2GHz-8GHz	Jul. 15, 2025	Jan. 14,2026~ Jan. 15,2026	Jul. 14, 2026	CBP (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A1	0.5GHz-18GHz	Jul. 15, 2025	Jan. 14,2026~ Jan. 15,2026	Jul. 14, 2026	CBP (DF02-HY)
Power Divider	MCLI	PS4-16	25142	4Way ; 0.5-18GHz	Aug. 13, 2025	Jan. 14,2026~ Jan. 15,2026	Aug. 12, 2026	CBP (DF02-HY)
Coupler	MVE	MVE4816-10	A800044	0.5-18GHz	Aug. 13, 2025	Jan. 14,2026~ Jan. 15,2026	Aug. 12, 2026	CBP (DF02-HY)
RF Cable	E-Instument	SS405	SS405-150cm-#15	0.5-18GHz	Aug. 13, 2025	Jan. 14,2026~ Jan. 15,2026	Aug. 12, 2026	CBP (DF02-HY)
Software 1	Sporton	Adaptivity Test Tools	N/A	Ver 1.9.3	NCR	Jan. 14,2026~ Jan. 15,2026	NCR	CBP (DF02-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	KV2D06A18ES	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Jul. 01, 2026	Radiation (03CH17-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 25, 2026	Radiation (03CH17-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Dec. 10, 2026	Radiation (03CH17-HY)
Amplifier	EMCI	EMC118A45SE	980791	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 25, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Aug. 24, 2026	Radiation (03CH17-HY)
Amplifier	SONOMA	310N	432035	9kHz ~ 1GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
EXA Signal Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 06, 2026	Radiation (03CH17-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 15, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 14, 2026	Radiation (03CH17-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/EMC101Y-KM-KM-1000/EMC101Y-KM-KM-9000	04613/2,240904,240915	30MHz~40GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Mar. 30, 2026	Radiation (03CH17-HY)
Software	Audix	E3	RK-002469	N/A	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.1 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/12/15~2026/1/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	001	5955	17.41	17.13	23.81	22.90	320.00	Pass
11a	6Mbps	2	049	6195	17.45	17.13	23.70	22.50	320.00	Pass
11a	6Mbps	2	093	6415	17.43	17.12	24.11	22.61	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	001	5955	5.02	4.97	8.01	0.87		8.88	24.00	Pass
11a	6Mbps	2	049	6195	5.21	4.63	7.94	0.87		8.81	24.00	Pass
11a	6Mbps	2	093	6415	4.76	4.79	7.79	0.87		8.66	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	001	5955	0.03	0.03			-4.02	2.97		-1.05	-1.00	Pass
11a	6Mbps	2	049	6195	0.03	0.03			-4.17	2.97		-1.20	-1.00	Pass
11a	6Mbps	2	093	6415	0.03	0.03			-3.99	2.97		-1.02	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	097	6435	17.46	17.14	24.05	22.91	320.00	Pass
11a	6Mbps	2	105	6475	17.43	17.11	23.90	22.96	320.00	Pass
11a	6Mbps	2	113	6515	17.41	17.10	24.34	22.94	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	097	6435	4.55	3.93	7.26	0.95		8.21	24.00	Pass
11a	6Mbps	2	105	6475	5.18	4.36	7.80	0.95		8.75	24.00	Pass
11a	6Mbps	2	113	6515	5.19	4.64	7.93	0.95		8.88	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	097	6435	0.03	0.03			-4.18	2.95		-1.23	-1.00	Pass
11a	6Mbps	2	105	6475	0.03	0.03			-4.02	2.95		-1.07	-1.00	Pass
11a	6Mbps	2	113	6515	0.03	0.03			-4.04	2.95		-1.09	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	117	6535	17.43	17.11	24.00	22.96	320.00	Pass
11a	6Mbps	2	149	6695	17.42	17.12	23.89	23.06	320.00	Pass
11a	6Mbps	2	181	6855	17.44	17.11	24.16	22.90	320.00	Pass

U-NII-7 straddle channel MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	185	6875	17.46	17.09	23.99	23.02	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	117	6535	4.89	3.84	7.41	1.01		8.42	24.00	Pass
11a	6Mbps	2	149	6695	4.31	4.19	7.26	1.01		8.27	24.00	Pass
11a	6Mbps	2	181	6855	4.35	4.11	7.24	1.01		8.25	24.00	Pass

U-NII-7 straddle channel MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7			
11a	6Mbps	2	185	6875	4.32	3.72	7.04	1.01		8.05	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	117	6535	0.03	0.03			-4.41	3.02		-1.39	-1.00	Pass
11a	6Mbps	2	149	6695	0.03	0.03			-4.42	3.02		-1.41	-1.00	Pass
11a	6Mbps	2	181	6855	0.03	0.03			-4.39	3.02		-1.37	-1.00	Pass

FCC U-NII-7 straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	185	6875	0.03	0.03			-4.62	3.02		-1.60	-1.00	Pass

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	189	6895	17.50	17.14	23.79	22.95	320.00	Pass
11a	6Mbps	2	209	6995	17.55	16.96	23.94	22.01	320.00	Pass
11a	6Mbps	2	229	7095	17.43	17.11	23.91	22.86	320.00	Pass
11a	6Mbps	2	233	7115	17.36	17.09	23.62	22.81	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7			
11a	6Mbps	2	189	6895	4.67	4.17	7.44	0.73		8.17	24.00	Pass
11a	6Mbps	2	209	6995	4.09	4.92	7.54	0.73		8.27	24.00	Pass
11a	6Mbps	2	229	7095	4.87	5.24	8.07	0.73		8.80	24.00	Pass
11a	6Mbps	2	233	7115	4.86	5.42	8.16	0.73		8.89	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	189	6895	0.03	0.03			-4.33	2.83		-1.50	-1.00	Pass
11a	6Mbps	2	209	6995	0.03	0.03			-3.88	2.83		-1.05	-1.00	Pass
11a	6Mbps	2	229	7095	0.03	0.03			-4.33	2.83		-1.50	-1.00	Pass
11a	6Mbps	2	233	7115	0.03	0.03			-4.11	2.83		-1.28	-1.00	Pass

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/12/21~2026/1/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
HE20	MCS0	2	001	5955	Full	7.97	7.63	10.81	0.87		11.68	24.00	Pass
HE20	MCS0	2	001	5955	26/0	-1.94	-1.52	1.29	0.87		2.16	24.00	Pass
HE20	MCS0	2	001	5955	52/37	0.91	1.16	4.05	0.87		4.92	24.00	Pass
HE20	MCS0	2	001	5955	106/53	4.01	3.92	6.98	0.87		7.85	24.00	Pass
HE20	MCS0	2	049	6195	Full	8.58	7.59	11.12	0.87		11.99	24.00	Pass
HE20	MCS0	2	049	6195	26/4	-0.38	-0.51	2.57	0.87		3.44	24.00	Pass
HE20	MCS0	2	049	6195	52/38	0.53	0.23	3.39	0.87		4.26	24.00	Pass
HE20	MCS0	2	049	6195	106/53	4.51	3.96	7.25	0.87		8.12	24.00	Pass
HE20	MCS0	2	093	6415	Full	7.97	7.32	10.67	0.87		11.54	24.00	Pass
HE20	MCS0	2	093	6415	26/8	-1.81	-1.94	1.14	0.87		2.01	24.00	Pass
HE20	MCS0	2	093	6415	52/40	0.51	0.43	3.48	0.87		4.35	24.00	Pass
HE20	MCS0	2	093	6415	106/54	3.89	3.96	6.94	0.87		7.81	24.00	Pass
HE40	MCS0	2	003	5965	Full	10.79	10.93	13.87	0.87		14.74	24.00	Pass
HE40	MCS0	2	003	5965	242/61	8.11	7.87	11.00	0.87		11.87	24.00	Pass
HE40	MCS0	2	051	6205	Full	10.56	10.28	13.43	0.87		14.30	24.00	Pass
HE40	MCS0	2	051	6205	242/61	6.95	7.51	10.25	0.87		11.12	24.00	Pass
HE40	MCS0	2	091	6405	Full	11.01	10.67	13.85	0.87		14.72	24.00	Pass
HE40	MCS0	2	091	6405	242/62	8.03	7.75	10.90	0.87		11.77	24.00	Pass
HE80	MCS0	2	007	5985	Full	13.63	13.91	16.78	0.87		17.65	24.00	Pass
HE80	MCS0	2	007	5985	484/65	10.93	10.96	13.96	0.87		14.83	24.00	Pass
HE80	MCS0	2	055	6225	Full	13.66	13.87	16.78	0.87		17.65	24.00	Pass
HE80	MCS0	2	055	6225	484/65	11.17	10.97	14.08	0.87		14.95	24.00	Pass
HE80	MCS0	2	087	6385	Full	13.65	13.63	16.65	0.87		17.52	24.00	Pass
HE80	MCS0	2	087	6385	484/66	11.31	11.18	14.26	0.87		15.13	24.00	Pass
HE160	MCS0	2	015	6025	Full	16.64	17.31	20.00	0.87		20.87	24.00	Pass
HE160	MCS0	2	015	6025	996/67	13.96	13.88	16.93	0.87		17.80	24.00	Pass
HE160	MCS0	2	047	6185	Full	16.69	16.92	19.82	0.87		20.69	24.00	Pass
HE160	MCS0	2	047	6185	996/67	14.38	14.01	17.21	0.87		18.08	24.00	Pass
HE160	MCS0	2	079	6345	Full	16.69	17.05	19.88	0.87		20.75	24.00	Pass
HE160	MCS0	2	079	6345	996/S67	13.61	13.42	16.53	0.87		17.40	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	001	5955	Full	0.02	0.02			-1.30	0.01	-1.29	-1.00	Pass	
HE20	MCS0	2	001	5955	26/0	0.00	0.00			-2.00	0.01	-1.99	-1.00	Pass	
HE20	MCS0	2	001	5955	52/37	0.00	0.00			-2.00	0.01	-1.99	-1.00	Pass	
HE20	MCS0	2	001	5955	106/53	0.03	0.03			-2.05	0.01	-2.04	-1.00	Pass	
HE20	MCS0	2	049	6195	Full	0.02	0.02			-1.17	0.01	-1.16	-1.00	Pass	
HE20	MCS0	2	049	6195	26/4	0.00	0.00			-1.83	0.01	-1.82	-1.00	Pass	
HE20	MCS0	2	049	6195	52/38	0.00	0.00			-2.92	0.01	-2.91	-1.00	Pass	
HE20	MCS0	2	049	6195	106/53	0.03	0.03			-1.57	0.01	-1.56	-1.00	Pass	
HE20	MCS0	2	093	6415	Full	0.02	0.02			-1.20	0.01	-1.19	-1.00	Pass	
HE20	MCS0	2	093	6415	26/8	0.00	0.00			-1.80	0.01	-1.79	-1.00	Pass	
HE20	MCS0	2	093	6415	52/40	0.00	0.00			-2.38	0.01	-2.37	-1.00	Pass	
HE20	MCS0	2	093	6415	106/54	0.03	0.03			-1.82	0.01	-1.81	-1.00	Pass	
HE40	MCS0	2	003	5965	Full	0.00	0.00			-1.31	0.01	-1.30	-1.00	Pass	
HE40	MCS0	2	003	5965	242/61	0.00	0.00			-1.40	0.01	-1.39	-1.00	Pass	
HE40	MCS0	2	051	6205	Full	0.00	0.00			-1.85	0.01	-1.84	-1.00	Pass	
HE40	MCS0	2	051	6205	242/61	0.00	0.00			-2.49	0.01	-2.48	-1.00	Pass	
HE40	MCS0	2	091	6405	Full	0.00	0.00			-1.50	0.01	-1.49	-1.00	Pass	
HE40	MCS0	2	091	6405	242/62	0.00	0.00			-1.78	0.01	-1.77	-1.00	Pass	
HE80	MCS0	2	007	5985	Full	0.00	0.00			-1.73	0.01	-1.72	-1.00	Pass	
HE80	MCS0	2	007	5985	484/65	0.06	0.06			-1.94	0.01	-1.93	-1.00	Pass	
HE80	MCS0	2	055	6225	Full	0.00	0.00		-1.40	0.01	-1.39	-1.00	Pass		
HE80	MCS0	2	055	6225	484/65	0.06	0.06		-1.68	0.01	-1.67	-1.00	Pass		
HE80	MCS0	2	087	6385	Full	0.00	0.00		-1.40	0.01	-1.39	-1.00	Pass		
HE80	MCS0	2	087	6385	484/66	0.06	0.06		-1.74	0.01	-1.73	-1.00	Pass		
HE160	MCS0	2	015	6025	Full	0.02	0.02		-1.66	0.01	-1.65	-1.00	Pass		
HE160	MCS0	2	015	6025	996/67	0.10	0.09		-2.00	0.01	-1.99	-1.00	Pass		
HE160	MCS0	2	047	6185	Full	0.02	0.02		-1.55	0.01	-1.54	-1.00	Pass		
HE160	MCS0	2	047	6185	996/67	0.10	0.09		-1.82	0.01	-1.81	-1.00	Pass		
HE160	MCS0	2	079	6345	Full	0.02	0.02		-1.19	0.01	-1.18	-1.00	Pass		
HE160	MCS0	2	079	6345	996/S67	0.10	0.09		-1.39	0.01	-1.38	-1.00	Pass		

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
HE20	MCS0	2	097	6435	Full	7.81	7.23	10.54	0.95		11.49	24.00	Pass
HE20	MCS0	2	097	6435	26/0	-1.61	-1.74	1.34	0.95		2.29	24.00	Pass
HE20	MCS0	2	097	6435	52/37	1.18	0.83	4.02	0.95		4.97	24.00	Pass
HE20	MCS0	2	097	6435	106/53	4.12	3.15	6.67	0.95		7.62	24.00	Pass
HE20	MCS0	2	105	6475	Full	8.19	7.33	10.79	0.95		11.74	24.00	Pass
HE20	MCS0	2	105	6475	26/4	-0.51	-0.98	2.27	0.95		3.22	24.00	Pass
HE20	MCS0	2	105	6475	52/38	0.71	0.35	3.54	0.95		4.49	24.00	Pass
HE20	MCS0	2	105	6475	106/53	4.58	3.44	7.06	0.95		8.01	24.00	Pass
HE20	MCS0	2	113	6515	Full	8.39	7.54	11.00	0.95		11.95	24.00	Pass
HE20	MCS0	2	113	6515	26/8	-1.42	-1.88	1.37	0.95		2.32	24.00	Pass
HE20	MCS0	2	113	6515	52/40	1.11	0.59	3.87	0.95		4.82	24.00	Pass
HE20	MCS0	2	113	6515	106/54	4.77	3.99	7.41	0.95		8.36	24.00	Pass
HE40	MCS0	2	099	6445	Full	10.41	9.71	13.08	0.95		14.03	24.00	Pass
HE40	MCS0	2	099	6445	242/61	7.78	7.18	10.50	0.95		11.45	24.00	Pass
HE40	MCS0	2	107	6485	Full	10.97	10.31	13.66	0.95		14.61	24.00	Pass
HE40	MCS0	2	107	6485	242/62	8.31	7.31	10.85	0.95		11.80	24.00	Pass
HE80	MCS0	2	103	6465	Full	13.48	13.03	16.27	0.95		17.22	24.00	Pass
HE80	MCS0	2	103	6465	484/65	10.85	10.41	13.65	0.95		14.60	24.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
HE40	MCS0	2	115	6525	Full	11.42	10.73	14.10	0.95		15.05	24.00	Pass
HE40	MCS0	2	115	6525	242/62	8.41	7.33	10.91	0.95		11.86	24.00	Pass
HE80	MCS0	2	119	6545	Full	13.67	13.14	16.42	0.95		17.37	24.00	Pass
HE80	MCS0	2	119	6545	484/66	11.24	10.85	14.06	0.95		15.01	24.00	Pass
HE160	MCS0	2	111	6505	Full	16.24	16.59	19.43	0.95		20.38	24.00	Pass
HE160	MCS0	2	111	6505	996/67	13.84	13.66	16.76	0.95		17.71	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	097	6435	Full	0.02	0.02			-1.45	0.01	-1.44	-1.00	Pass	
HE20	MCS0	2	097	6435	26/0	0.00	0.00			-1.59	0.01	-1.58	-1.00	Pass	
HE20	MCS0	2	097	6435	52/37	0.00	0.00			-2.00	0.01	-1.99	-1.00	Pass	
HE20	MCS0	2	097	6435	106/53	0.03	0.03			-2.09	0.01	-2.08	-1.00	Pass	
HE20	MCS0	2	105	6475	Full	0.02	0.02			-1.14	0.01	-1.13	-1.00	Pass	
HE20	MCS0	2	105	6475	26/4	0.00	0.00			-2.02	0.01	-2.01	-1.00	Pass	
HE20	MCS0	2	105	6475	52/38	0.00	0.00			-2.45	0.01	-2.44	-1.00	Pass	
HE20	MCS0	2	105	6475	106/53	0.03	0.03			-1.85	0.01	-1.84	-1.00	Pass	
HE20	MCS0	2	113	6515	Full	0.02	0.02			-1.06	0.01	-1.05	-1.00	Pass	
HE20	MCS0	2	113	6515	26/8	0.00	0.00			-1.50	0.01	-1.49	-1.00	Pass	
HE20	MCS0	2	113	6515	52/40	0.00	0.00			-1.92	0.01	-1.91	-1.00	Pass	
HE20	MCS0	2	113	6515	106/54	0.03	0.03			-1.49	0.01	-1.48	-1.00	Pass	
HE40	MCS0	2	099	6445	Full	0.00	0.00			-1.96	0.01	-1.95	-1.00	Pass	
HE40	MCS0	2	099	6445	242/61	0.00	0.00			-2.14	0.01	-2.13	-1.00	Pass	
HE40	MCS0	2	107	6485	Full	0.00	0.00			-1.38	0.01	-1.37	-1.00	Pass	
HE40	MCS0	2	107	6485	242/62	0.00	0.00			-1.50	0.01	-1.49	-1.00	Pass	
HE80	MCS0	2	103	6465	Full	0.00	0.00		-1.90	0.01	-1.89	-1.00	Pass		
HE80	MCS0	2	103	6465	484/65	0.06	0.06		-2.22	0.01	-2.21	-1.00	Pass		

U-NII-6 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE40	MCS0	2	115	6525	Full	0.00	0.00			-1.13	0.01		-1.12	-1.00	Pass
HE40	MCS0	2	115	6525	242/62	0.00	0.00			-1.46	0.01		-1.45	-1.00	Pass
HE80	MCS0	2	119	6545	Full	0.00	0.00			-1.70	0.01		-1.69	-1.00	Pass
HE80	MCS0	2	119	6545	484/66	0.06	0.06			-2.00	0.01		-1.99	-1.00	Pass
HE160	MCS0	2	111	6505	Full	0.02	0.02			-1.41	0.01		-1.40	-1.00	Pass
HE160	MCS0	2	111	6505	996/67	0.10	0.09			-1.78	0.01		-1.77	-1.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	117	6535	Full	8.05	7.13	10.62	1.01		11.63	24.00	Pass
HE20	MCS0	2	117	6535	26/0	-2.03	-2.51	0.75	1.01		1.76	24.00	Pass
HE20	MCS0	2	117	6535	52/37	1.03	0.55	3.81	1.01		4.82	24.00	Pass
HE20	MCS0	2	117	6535	106/53	3.79	2.75	6.31	1.01		7.32	24.00	Pass
HE20	MCS0	2	149	6695	Full	7.83	7.59	10.72	1.01		11.73	24.00	Pass
HE20	MCS0	2	149	6695	26/4	-1.04	-1.02	1.98	1.01		2.99	24.00	Pass
HE20	MCS0	2	149	6695	52/38	0.44	0.13	3.30	1.01		4.31	24.00	Pass
HE20	MCS0	2	149	6695	106/53	3.94	3.27	6.63	1.01		7.64	24.00	Pass
HE20	MCS0	2	181	6855	Full	7.42	7.26	10.35	1.01		11.36	24.00	Pass
HE20	MCS0	2	181	6855	26/8	-2.44	-2.44	0.57	1.01		1.58	24.00	Pass
HE20	MCS0	2	181	6855	52/40	0.06	-0.19	2.95	1.01		3.96	24.00	Pass
HE20	MCS0	2	181	6855	106/54	3.97	3.24	6.63	1.01		7.64	24.00	Pass
HE40	MCS0	2	123	6565	Full	11.26	10.47	13.89	1.01		14.90	24.00	Pass
HE40	MCS0	2	123	6565	242/61	8.49	7.74	11.14	1.01		12.15	24.00	Pass
HE40	MCS0	2	147	6685	Full	10.73	10.76	13.76	1.01		14.77	24.00	Pass
HE40	MCS0	2	147	6685	242/61	8.17	7.88	11.04	1.01		12.05	24.00	Pass
HE40	MCS0	2	179	6845	Full	10.56	9.93	13.27	1.01		14.28	24.00	Pass
HE40	MCS0	2	179	6845	242/62	7.59	7.18	10.40	1.01		11.41	24.00	Pass
HE80	MCS0	2	135	6625	Full	13.78	13.53	16.67	1.01		17.68	24.00	Pass
HE80	MCS0	2	135	6625	484/65	11.52	11.05	14.30	1.01		15.31	24.00	Pass
HE80	MCS0	2	151	6705	Full	13.53	13.32	16.44	1.01		17.45	24.00	Pass
HE80	MCS0	2	151	6705	484/65	10.92	10.63	13.79	1.01		14.80	24.00	Pass
HE80	MCS0	2	167	6785	Full	13.84	13.35	16.61	1.01		17.62	24.00	Pass
HE80	MCS0	2	167	6785	484/66	11.09	10.48	13.81	1.01		14.82	24.00	Pass
HE160	MCS0	2	143	6665	Full	16.21	16.95	19.61	1.01		20.62	24.00	Pass
HE160	MCS0	2	143	6665	996/S67	13.64	13.52	16.59	1.01		17.60	24.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	185	6875	Full	7.85	7.38	10.63	1.01		11.64	24.00	Pass
HE20	MCS0	2	185	6875	26/8	-2.07	-2.26	0.85	1.01		1.86	24.00	Pass
HE20	MCS0	2	185	6875	52/40	0.29	0.01	3.16	1.01		4.17	24.00	Pass
HE20	MCS0	2	185	6875	106/54	4.25	3.62	6.96	1.01		7.97	24.00	Pass
HE40	MCS0	2	187	6885	Full	10.79	10.18	13.51	1.01		14.52	24.00	Pass
HE40	MCS0	2	187	6885	242/62	7.85	7.13	10.52	1.01		11.53	24.00	Pass
HE80	MCS0	2	183	6865	Full	13.44	13.37	16.42	1.01		17.43	24.00	Pass
HE80	MCS0	2	183	6865	484/66	11.06	11.11	14.10	1.01		15.11	24.00	Pass
HE160	MCS0	2	175	6825	Full	16.87	16.93	19.91	1.01		20.92	24.00	Pass
HE160	MCS0	2	175	6825	996/67	14.39	13.72	17.08	1.01		18.09	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO															
Mod.	Data Rate	NtX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	117	6535	Full	0.02	0.02		-1.55	0.07	-1.48	-1.00	Pass		
HE20	MCS0	2	117	6535	26/0	0.00	0.00		-2.35	0.07	-2.28	-1.00	Pass		
HE20	MCS0	2	117	6535	52/37	0.00	0.00		-2.18	0.07	-2.11	-1.00	Pass		
HE20	MCS0	2	117	6535	106/53	0.03	0.03		-2.39	0.07	-2.32	-1.00	Pass		
HE20	MCS0	2	149	6695	Full	0.02	0.02		-1.70	0.07	-1.63	-1.00	Pass		
HE20	MCS0	2	149	6695	26/4	0.00	0.00		-2.24	0.07	-2.17	-1.00	Pass		
HE20	MCS0	2	149	6695	52/38	0.00	0.00		-2.78	0.07	-2.71	-1.00	Pass		
HE20	MCS0	2	149	6695	106/53	0.03	0.03		-2.28	0.07	-2.21	-1.00	Pass		
HE20	MCS0	2	181	6855	Full	0.02	0.02		-2.03	0.07	-1.96	-1.00	Pass		
HE20	MCS0	2	181	6855	26/8	0.00	0.00		-2.53	0.07	-2.46	-1.00	Pass		
HE20	MCS0	2	181	6855	52/40	0.00	0.00		-3.05	0.07	-2.98	-1.00	Pass		
HE20	MCS0	2	181	6855	106/54	0.03	0.03		-2.52	0.07	-2.45	-1.00	Pass		
HE40	MCS0	2	123	6565	Full	0.00	0.00		-1.28	0.07	-1.21	-1.00	Pass		
HE40	MCS0	2	123	6565	242/61	0.00	0.00		-1.48	0.07	-1.41	-1.00	Pass		
HE40	MCS0	2	147	6685	Full	0.00	0.00		-1.20	0.07	-1.13	-1.00	Pass		
HE40	MCS0	2	147	6685	242/61	0.00	0.00		-1.56	0.07	-1.49	-1.00	Pass		
HE40	MCS0	2	179	6845	Full	0.00	0.00	-1.53	0.07	-1.46	-1.00	Pass			
HE40	MCS0	2	179	6845	242/62	0.00	0.00	-2.03	0.07	-1.96	-1.00	Pass			
HE80	MCS0	2	135	6625	Full	0.00	0.00	-1.43	0.07	-1.36	-1.00	Pass			
HE80	MCS0	2	135	6625	484/65	0.06	0.06	-1.58	0.07	-1.51	-1.00	Pass			
HE80	MCS0	2	151	6705	Full	0.00	0.00	-1.90	0.07	-1.83	-1.00	Pass			
HE80	MCS0	2	151	6705	484/65	0.06	0.06	-2.21	0.07	-2.14	-1.00	Pass			
HE80	MCS0	2	167	6785	Full	0.00	0.00	-1.63	0.07	-1.56	-1.00	Pass			
HE80	MCS0	2	167	6785	484/66	0.06	0.06	-2.00	0.07	-1.93	-1.00	Pass			
HE160	MCS0	2	143	6665	Full	0.02	0.02	-1.36	0.07	-1.29	-1.00	Pass			
HE160	MCS0	2	143	6665	996/S67	0.10	0.09	-1.55	0.07	-1.48	-1.00	Pass			

U-NII-7 straddle channel MIMO														
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)		DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6			
HE20	MCS0	2	185	6875	Full	0.02	0.02			-1.34	0.07	-1.27	-1.00	Pass
HE20	MCS0	2	185	6875	26/8	0.00	0.00			-2.33	0.07	-2.26	-1.00	Pass
HE20	MCS0	2	185	6875	52/40	0.00	0.00			-2.88	0.07	-2.81	-1.00	Pass
HE20	MCS0	2	185	6875	106/54	0.03	0.03			-2.07	0.07	-2.00	-1.00	Pass
HE40	MCS0	2	187	6885	Full	0.00	0.00			-1.41	0.07	-1.34	-1.00	Pass
HE40	MCS0	2	187	6885	242/62	0.00	0.00			-1.97	0.07	-1.90	-1.00	Pass
HE80	MCS0	2	183	6865	Full	0.00	0.00			-1.45	0.07	-1.38	-1.00	Pass
HE80	MCS0	2	183	6865	484/66	0.06	0.06			-1.97	0.07	-1.90	-1.00	Pass
HE160	MCS0	2	175	6825	Full	0.02	0.02			-1.11	0.07	-1.04	-1.00	Pass
HE160	MCS0	2	175	6825	996/67	0.10	0.09			-1.40	0.07	-1.33	-1.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	189	6895	Full	7.81	7.27	10.56	0.73		11.29	24.00	Pass
HE20	MCS0	2	189	6895	26/0	-1.99	-2.31	0.86	0.73		1.59	24.00	Pass
HE20	MCS0	2	189	6895	52/37	0.53	0.08	3.32	0.73		4.05	24.00	Pass
HE20	MCS0	2	189	6895	106/53	4.56	3.73	7.18	0.73		7.91	24.00	Pass
HE20	MCS0	2	209	6995	Full	7.55	7.56	10.57	0.73		11.30	24.00	Pass
HE20	MCS0	2	209	6995	26/4	-0.09	-0.65	2.65	0.73		3.38	24.00	Pass
HE20	MCS0	2	209	6995	52/38	2.85	2.41	5.65	0.73		6.38	24.00	Pass
HE20	MCS0	2	209	6995	106/53	4.89	4.01	7.48	0.73		8.21	24.00	Pass
HE20	MCS0	2	229	7095	Full	8.45	8.03	11.26	0.73		11.99	24.00	Pass
HE20	MCS0	2	229	7095	26/8	-0.31	-0.51	2.60	0.73		3.33	24.00	Pass
HE20	MCS0	2	229	7095	52/40	2.84	2.03	5.46	0.73		6.19	24.00	Pass
HE20	MCS0	2	229	7095	106/54	5.15	5.07	8.12	0.73		8.85	24.00	Pass
HE20	MCS0	2	233	7115	Full	8.56	7.92	11.26	0.73		11.99	24.00	Pass
HE20	MCS0	2	233	7115	26/8	-0.41	-0.75	2.43	0.73		3.16	24.00	Pass
HE20	MCS0	2	233	7115	52/40	2.84	1.85	5.38	0.73		6.11	24.00	Pass
HE20	MCS0	2	233	7115	106/54	5.13	5.22	8.19	0.73		8.92	24.00	Pass
HE40	MCS0	2	195	6925	Full	10.86	10.58	13.73	0.73		14.46	24.00	Pass
HE40	MCS0	2	195	6925	242/61	8.13	7.69	10.93	0.73		11.66	24.00	Pass
HE40	MCS0	2	211	7005	Full	11.04	10.73	13.90	0.73		14.63	24.00	Pass
HE40	MCS0	2	211	7005	242/62	9.29	8.43	11.89	0.73		12.62	24.00	Pass
HE40	MCS0	2	227	7085	Full	11.52	10.72	14.15	0.73		14.88	24.00	Pass
HE40	MCS0	2	227	7085	242/62	9.38	8.52	11.98	0.73		12.71	24.00	Pass
HE80	MCS0	2	199	6945	Full	13.32	13.66	16.50	0.73		17.23	24.00	Pass
HE80	MCS0	2	199	6945	484/65	11.36	10.87	14.13	0.73		14.86	24.00	Pass
HE80	MCS0	2	215	7025	Full	13.84	13.96	16.91	0.73		17.64	24.00	Pass
HE80	MCS0	2	215	7025	484/66	12.24	11.95	15.11	0.73		15.84	24.00	Pass
HE160	MCS0	2	207	6985	Full	16.38	17.04	19.73	0.73		20.46	24.00	Pass
HE160	MCS0	2	207	6985	996/S67	13.59	13.56	16.59	0.73		17.32	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	189	6895	Full	0.02	0.02			-1.66	-0.13		-1.79	-1.00	Pass
HE20	MCS0	2	189	6895	26/0	0.00	0.00			-2.53	-0.13		-2.66	-1.00	Pass
HE20	MCS0	2	189	6895	52/37	0.00	0.00			-2.62	-0.13		-2.75	-1.00	Pass
HE20	MCS0	2	189	6895	106/53	0.03	0.03			-1.86	-0.13		-1.99	-1.00	Pass
HE20	MCS0	2	209	6995	Full	0.02	0.02			-1.55	-0.13		-1.68	-1.00	Pass
HE20	MCS0	2	209	6995	26/4	0.00	0.00			-1.60	-0.13		-1.73	-1.00	Pass
HE20	MCS0	2	209	6995	52/38	0.00	0.00			-1.58	-0.13		-1.71	-1.00	Pass
HE20	MCS0	2	209	6995	106/53	0.03	0.03			-1.59	-0.13		-1.72	-1.00	Pass
HE20	MCS0	2	229	7095	Full	0.02	0.02			-1.23	-0.13		-1.36	-1.00	Pass
HE20	MCS0	2	229	7095	26/8	0.00	0.00			-1.52	-0.13		-1.65	-1.00	Pass
HE20	MCS0	2	229	7095	52/40	0.00	0.00			-1.88	-0.13		-2.01	-1.00	Pass
HE20	MCS0	2	229	7095	106/54	0.03	0.03			-2.05	-0.13		-2.18	-1.00	Pass
HE20	MCS0	2	233	7115	Full	0.02	0.02			-0.95	-0.13		-1.08	-1.00	Pass
HE20	MCS0	2	233	7115	26/8	0.00	0.00			-1.68	-0.13		-1.81	-1.00	Pass
HE20	MCS0	2	233	7115	52/40	0.00	0.00			-1.75	-0.13		-1.88	-1.00	Pass
HE20	MCS0	2	233	7115	106/54	0.03	0.03			-1.93	-0.13		-2.06	-1.00	Pass
HE40	MCS0	2	195	6925	Full	0.00	0.00			-1.12	-0.13		-1.25	-1.00	Pass
HE40	MCS0	2	195	6925	242/61	0.00	0.00			-2.01	-0.13		-2.14	-1.00	Pass
HE40	MCS0	2	211	7005	Full	0.00	0.00			-0.90	-0.13		-1.03	-1.00	Pass
HE40	MCS0	2	211	7005	242/62	0.00	0.00			-1.17	-0.13		-1.30	-1.00	Pass
HE40	MCS0	2	227	7085	Full	0.00	0.00		-1.20	-0.13		-1.33	-1.00	Pass	
HE40	MCS0	2	227	7085	242/62	0.00	0.00		-1.49	-0.13		-1.62	-1.00	Pass	
HE80	MCS0	2	199	6945	Full	0.00	0.00		-1.47	-0.13		-1.60	-1.00	Pass	
HE80	MCS0	2	199	6945	484/65	0.06	0.06		-1.59	-0.13		-1.72	-1.00	Pass	
HE80	MCS0	2	215	7025	Full	0.00	0.00		-1.07	-0.13		-1.20	-1.00	Pass	
HE80	MCS0	2	215	7025	484/66	0.06	0.06		-1.57	-0.13		-1.70	-1.00	Pass	
HE160	MCS0	2	207	6985	Full	0.02	0.02		-1.40	-0.13		-1.53	-1.00	Pass	
HE160	MCS0	2	207	6985	996/S67	0.10	0.09		-1.51	-0.13		-1.64	-1.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	001	5955	Full	19.18	19.20	23.62	23.57	320.00	Pass
EHT20	MCS0	2	049	6195	Full	19.21	19.22	23.70	24.02	320.00	Pass
EHT20	MCS0	2	093	6415	Full	19.19	19.18	24.07	23.80	320.00	Pass
EHT40	MCS0	2	003	5965	Full	38.28	38.25	45.22	45.78	320.00	Pass
EHT40	MCS0	2	051	6205	Full	38.16	38.18	44.77	45.12	320.00	Pass
EHT40	MCS0	2	091	6405	Full	38.29	38.31	45.54	45.18	320.00	Pass
EHT80	MCS0	2	007	5985	Full	77.82	77.72	89.63	89.22	320.00	Pass
EHT80	MCS0	2	055	6225	Full	77.78	77.74	89.06	87.97	320.00	Pass
EHT80	MCS0	2	087	6385	Full	77.73	77.78	89.22	90.43	320.00	Pass
EHT160	MCS0	2	015	6025	Full	156.85	157.21	176.98	177.17	320.00	Pass
EHT160	MCS0	2	047	6185	Full	156.66	156.99	176.69	177.41	320.00	Pass
EHT160	MCS0	2	079	6345	Full	156.75	157.11	176.45	174.96	320.00	Pass
EHT320	MCS0	2	031	6105	Full	317.34	316.67	346.75	348.38	320.00	Pass
EHT320	MCS0	2	063	6265	Full	317.25	317.06	346.66	346.46	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	001	5955	Full	8.21	7.82	11.03	0.87		11.90	24.00	Pass
EHT20	MCS0	2	001	5955	26/0	-1.81	-1.43	1.39	0.87		2.26	24.00	Pass
EHT20	MCS0	2	001	5955	52/37	0.99	1.33	4.17	0.87		5.04	24.00	Pass
EHT20	MCS0	2	001	5955	106/53	4.07	4.04	7.07	0.87		7.94	24.00	Pass
EHT20	MCS0	2	001	5955	52T+26T/70	3.12	2.96	6.05	0.87		6.92	24.00	Pass
EHT20	MCS0	2	001	5955	106T+26T/82	5.07	4.96	8.03	0.87		8.90	24.00	Pass
EHT20	MCS0	2	049	6195	Full	8.76	7.67	11.26	0.87		12.13	24.00	Pass
EHT20	MCS0	2	049	6195	26/4	-0.16	-0.32	2.77	0.87		3.64	24.00	Pass
EHT20	MCS0	2	049	6195	52/38	0.62	0.43	3.54	0.87		4.41	24.00	Pass
EHT20	MCS0	2	049	6195	106/53	4.81	4.14	7.50	0.87		8.37	24.00	Pass
EHT20	MCS0	2	093	6415	Full	8.09	7.48	10.81	0.87		11.68	24.00	Pass
EHT20	MCS0	2	093	6415	26/8	-2.01	-1.66	1.18	0.87		2.05	24.00	Pass
EHT20	MCS0	2	093	6415	52/40	0.54	0.69	3.63	0.87		4.50	24.00	Pass
EHT20	MCS0	2	093	6415	106/54	4.02	4.27	7.16	0.87		8.03	24.00	Pass
EHT40	MCS0	2	003	5965	Full	10.83	11.11	13.98	0.87		14.85	24.00	Pass
EHT40	MCS0	2	003	5965	242/61	8.24	8.04	11.15	0.87		12.02	24.00	Pass
EHT40	MCS0	2	051	6205	Full	10.99	10.69	13.85	0.87		14.72	24.00	Pass
EHT40	MCS0	2	051	6205	242/61	8.42	7.71	11.09	0.87		11.96	24.00	Pass
EHT40	MCS0	2	091	6405	Full	11.23	11.07	14.16	0.87		15.03	24.00	Pass
EHT40	MCS0	2	091	6405	242/62	8.56	8.27	11.43	0.87		12.30	24.00	Pass
EHT80	MCS0	2	007	5985	Full	13.82	13.99	16.92	0.87		17.79	24.00	Pass
EHT80	MCS0	2	007	5985	484/65	11.19	11.18	14.20	0.87		15.07	24.00	Pass
EHT80	MCS0	2	007	5985	Puncture20/4	13.13	13.07	16.11	0.87		16.98	24.00	Pass
EHT80	MCS0	2	055	6225	Full	13.77	13.89	16.84	0.87		17.71	24.00	Pass
EHT80	MCS0	2	055	6225	484/65	11.34	11.24	14.30	0.87		15.17	24.00	Pass
EHT80	MCS0	2	055	6225	Puncture20/1	12.94	12.85	15.91	0.87		16.78	24.00	Pass
EHT80	MCS0	2	087	6385	Full	13.75	13.76	16.77	0.87		17.64	24.00	Pass
EHT80	MCS0	2	087	6385	484/66	11.61	11.31	14.47	0.87		15.34	24.00	Pass
EHT80	MCS0	2	087	6385	Puncture20/1	13.01	12.84	15.94	0.87		16.81	24.00	Pass
EHT160	MCS0	2	015	6025	Full	16.76	17.36	20.08	0.87		20.95	24.00	Pass
EHT160	MCS0	2	015	6025	996/67	14.29	14.42	17.37	0.87		18.24	24.00	Pass
EHT160	MCS0	2	015	6025	Puncture20/8	16.56	16.76	19.67	0.87		20.54	24.00	Pass
EHT160	MCS0	2	015	6025	Puncture40/4	16.05	16.26	19.17	0.87		20.04	24.00	Pass
EHT160	MCS0	2	047	6185	Full	16.72	17.05	19.90	0.87		20.77	24.00	Pass
EHT160	MCS0	2	047	6185	996/67	14.32	14.09	17.22	0.87		18.09	24.00	Pass
EHT160	MCS0	2	047	6185	Puncture20/8	16.34	16.36	19.36	0.87		20.23	24.00	Pass
EHT160	MCS0	2	047	6185	Puncture40/4	15.87	15.98	18.94	0.87		19.81	24.00	Pass
EHT160	MCS0	2	079	6345	Full	16.77	17.18	19.99	0.87		20.86	24.00	Pass
EHT160	MCS0	2	079	6345	996/S67	13.81	13.51	16.67	0.87		17.54	24.00	Pass
EHT160	MCS0	2	079	6345	Puncture20/1	16.61	16.81	19.72	0.87		20.59	24.00	Pass
EHT160	MCS0	2	079	6345	Puncture40/1	16.31	16.52	19.43	0.87		20.30	24.00	Pass
EHT320	MCS0	2	031	6105	Full	17.84	17.75	20.81	0.87		21.68	24.00	Pass
EHT320	MCS0	2	031	6105	996*4/69	15.83	15.73	18.79	0.87		19.66	24.00	Pass
EHT320	MCS0	2	031	6105	Puncture40/8	17.57	17.62	20.61	0.87		21.48	24.00	Pass
EHT320	MCS0	2	031	6105	Puncture80/4	17.06	17.06	20.07	0.87		20.94	24.00	Pass
EHT320	MCS0	2	031	6105	Puncture80+40/6	16.69	16.54	19.63	0.87		20.50	24.00	Pass
EHT320	MCS0	2	063	6265	Full	17.79	17.99	20.90	0.87		21.77	24.00	Pass
EHT320	MCS0	2	063	6265	996*4/69	15.71	15.87	18.80	0.87		19.67	24.00	Pass
EHT320	MCS0	2	063	6265	Puncture40/8	17.48	17.86	20.68	0.87		21.55	24.00	Pass
EHT320	MCS0	2	063	6265	Puncture80/4	17.03	17.39	20.22	0.87		21.09	24.00	Pass
EHT320	MCS0	2	063	6265	Puncture80+40/6	16.35	16.74	19.56	0.87		20.43	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	001	5955	Full	0.00	0.00		-1.27	0.01	-1.26	-1.00	Pass		
EHT20	MCS0	2	001	5955	26/0	0.00	0.00		-1.50	0.01	-1.49	-1.00	Pass		
EHT20	MCS0	2	001	5955	52/37	0.00	0.00		-1.59	0.01	-1.58	-1.00	Pass		
EHT20	MCS0	2	001	5955	106/53	0.02	0.02		-1.72	0.01	-1.71	-1.00	Pass		
EHT20	MCS0	2	001	5955	52T+26T/70	0.02	0.02		-1.62	0.01	-1.61	-1.00	Pass		
EHT20	MCS0	2	001	5955	106T+26T/82	0.02	0.02		-1.65	0.01	-1.64	-1.00	Pass		
EHT20	MCS0	2	049	6195	Full	0.00	0.00		-1.16	0.01	-1.15	-1.00	Pass		
EHT20	MCS0	2	049	6195	26/4	0.00	0.00		-1.33	0.01	-1.32	-1.00	Pass		
EHT20	MCS0	2	049	6195	52/38	0.00	0.00		-2.48	0.01	-2.47	-1.00	Pass		
EHT20	MCS0	2	049	6195	106/53	0.02	0.02		-1.26	0.01	-1.25	-1.00	Pass		
EHT20	MCS0	2	093	6415	Full	0.00	0.00		-1.16	0.01	-1.15	-1.00	Pass		
EHT20	MCS0	2	093	6415	26/8	0.00	0.00		-1.60	0.01	-1.59	-1.00	Pass		
EHT20	MCS0	2	093	6415	52/40	0.00	0.00		-2.05	0.01	-2.04	-1.00	Pass		
EHT20	MCS0	2	093	6415	106/54	0.02	0.02		-1.53	0.01	-1.52	-1.00	Pass		
EHT40	MCS0	2	003	5965	Full	0.00	0.00		-1.28	0.01	-1.27	-1.00	Pass		
EHT40	MCS0	2	003	5965	242/61	0.00	0.00		-1.38	0.01	-1.37	-1.00	Pass		
EHT40	MCS0	2	051	6205	Full	0.00	0.00		-1.45	0.01	-1.44	-1.00	Pass		
EHT40	MCS0	2	051	6205	242/61	0.00	0.00		-1.56	0.01	-1.55	-1.00	Pass		
EHT40	MCS0	2	091	6405	Full	0.00	0.00		-1.05	0.01	-1.04	-1.00	Pass		
EHT40	MCS0	2	091	6405	242/62	0.00	0.00		-1.34	0.01	-1.33	-1.00	Pass		
EHT80	MCS0	2	007	5985	Full	0.00	0.00		-1.26	0.01	-1.25	-1.00	Pass		
EHT80	MCS0	2	007	5985	484/65	0.06	0.06		-1.66	0.01	-1.65	-1.00	Pass		
EHT80	MCS0	2	007	5985	Puncture20/4	0.06	0.06		-1.46	0.01	-1.45	-1.00	Pass		
EHT80	MCS0	2	055	6225	Full	0.00	0.00		-1.24	0.01	-1.23	-1.00	Pass		
EHT80	MCS0	2	055	6225	484/65	0.06	0.06		-1.73	0.01	-1.72	-1.00	Pass		
EHT80	MCS0	2	055	6225	Puncture20/1	0.06	0.06		-1.34	0.01	-1.33	-1.00	Pass		
EHT80	MCS0	2	087	6385	Full	0.00	0.00		-1.20	0.01	-1.19	-1.00	Pass		
EHT80	MCS0	2	087	6385	484/66	0.06	0.06		-1.24	0.01	-1.23	-1.00	Pass		
EHT80	MCS0	2	087	6385	Puncture20/1	0.06	0.06		-1.52	0.01	-1.51	-1.00	Pass		
EHT160	MCS0	2	015	6025	Full	0.02	0.02		-1.13	0.01	-1.12	-1.00	Pass		
EHT160	MCS0	2	015	6025	996/67	0.09	0.09		-1.29	0.01	-1.28	-1.00	Pass		
EHT160	MCS0	2	015	6025	Puncture20/8	0.02	0.00		-1.51	0.01	-1.50	-1.00	Pass		
EHT160	MCS0	2	015	6025	Puncture40/4	0.68	0.68		-1.50	0.01	-1.49	-1.00	Pass		
EHT160	MCS0	2	047	6185	Full	0.02	0.02		-1.42	0.01	-1.41	-1.00	Pass		
EHT160	MCS0	2	047	6185	996/67	0.09	0.09		-2.03	0.01	-2.02	-1.00	Pass		
EHT160	MCS0	2	047	6185	Puncture20/8	0.02	0.00		-1.97	0.01	-1.96	-1.00	Pass		
EHT160	MCS0	2	047	6185	Puncture40/4	0.68	0.68		-1.81	0.01	-1.80	-1.00	Pass		
EHT160	MCS0	2	079	6345	Full	0.02	0.02		-1.14	0.01	-1.13	-1.00	Pass		
EHT160	MCS0	2	079	6345	996/S67	0.09	0.09		-1.66	0.01	-1.65	-1.00	Pass		
EHT160	MCS0	2	079	6345	Puncture20/1	0.02	0.00		-1.40	0.01	-1.39	-1.00	Pass		
EHT160	MCS0	2	079	6345	Puncture40/1	0.68	0.68	-1.47	0.01	-1.46	-1.00	Pass			
EHT320	MCS0	2	031	6105	Full	0.02	0.02	-3.18	0.01	-3.17	-1.00	Pass			
EHT320	MCS0	2	031	6105	996*4/69	0.12	0.11	-3.56	0.01	-3.55	-1.00	Pass			
EHT320	MCS0	2	031	6105	Puncture40/8	0.68	0.68	-3.69	0.01	-3.68	-1.00	Pass			
EHT320	MCS0	2	031	6105	Puncture80/4	0.67	0.66	-3.80	0.01	-3.79	-1.00	Pass			
EHT320	MCS0	2	031	6105	Puncture80+40/6	0.12	0.11	-3.63	0.01	-3.62	-1.00	Pass			
EHT320	MCS0	2	063	6265	Full	0.02	0.02	-3.09	0.01	-3.08	-1.00	Pass			
EHT320	MCS0	2	063	6265	996*4/69	0.12	0.11	-3.43	0.01	-3.42	-1.00	Pass			
EHT320	MCS0	2	063	6265	Puncture40/8	0.68	0.68	-3.57	0.01	-3.56	-1.00	Pass			
EHT320	MCS0	2	063	6265	Puncture80/4	0.67	0.66	-3.53	0.01	-3.52	-1.00	Pass			
EHT320	MCS0	2	063	6265	Puncture80+40/6	0.12	0.11	-3.63	0.01	-3.62	-1.00	Pass			

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	097	6435	Full	19.19	19.20	23.89	23.63	320.00	Pass
EHT20	MCS0	2	105	6475	Full	19.21	19.21	23.80	23.92	320.00	Pass
EHT20	MCS0	2	113	6515	Full	19.19	19.18	24.18	23.78	320.00	Pass
EHT40	MCS0	2	099	6445	Full	38.29	38.24	45.04	45.81	320.00	Pass
EHT40	MCS0	2	107	6485	Full	38.24	38.32	45.17	45.41	320.00	Pass
EHT80	MCS0	2	103	6465	Full	77.87	77.91	90.05	89.57	320.00	Pass

U-NII-6 straddle channel MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT40	MCS0	2	115	6525	Full	38.29	38.27	45.79	45.39	320.00	Pass
EHT80	MCS0	2	119	6545	Full	77.70	77.79	89.18	88.61	320.00	Pass
EHT160	MCS0	2	111	6505	Full	156.80	157.04	175.58	175.30	320.00	Pass
EHT320	MCS0	2	095	6425	Full	317.20	317.01	348.77	348.67	320.00	Pass
EHT320	MCS0	2	127	6585	Full	317.34	317.10	347.71	348.48	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	097	6435	Full	7.98	7.29	10.66	0.95		11.61	24.00	Pass
EHT20	MCS0	2	097	6435	26/0	-1.52	-1.49	1.51	0.95		2.46	24.00	Pass
EHT20	MCS0	2	097	6435	52/37	1.26	0.97	4.13	0.95		5.08	24.00	Pass
EHT20	MCS0	2	097	6435	106/53	4.29	3.52	6.93	0.95		7.88	24.00	Pass
EHT20	MCS0	2	097	6435	52T+26T/70	3.21	2.45	5.86	0.95		6.81	24.00	Pass
EHT20	MCS0	2	105	6475	106T+26T/82	5.13	4.51	7.84	0.95		8.79	24.00	Pass
EHT20	MCS0	2	105	6475	Full	8.31	7.54	10.95	0.95		11.90	24.00	Pass
EHT20	MCS0	2	105	6475	26/4	-0.46	-0.64	2.46	0.95		3.41	24.00	Pass
EHT20	MCS0	2	105	6475	52/38	1.01	0.67	3.85	0.95		4.80	24.00	Pass
EHT20	MCS0	2	105	6475	106/53	4.81	3.69	7.30	0.95		8.25	24.00	Pass
EHT20	MCS0	2	113	6515	Full	8.51	7.68	11.13	0.95		12.08	24.00	Pass
EHT20	MCS0	2	113	6515	26/8	-1.27	-1.63	1.56	0.95		2.51	24.00	Pass
EHT20	MCS0	2	113	6515	52/40	1.28	0.78	4.05	0.95		5.00	24.00	Pass
EHT20	MCS0	2	113	6515	106/54	4.89	4.14	7.54	0.95		8.49	24.00	Pass
EHT40	MCS0	2	099	6445	Full	10.83	10.26	13.56	0.95		14.51	24.00	Pass
EHT40	MCS0	2	099	6445	242/61	8.43	7.56	11.03	0.95		11.98	24.00	Pass
EHT40	MCS0	2	107	6485	Full	11.04	10.36	13.72	0.95		14.67	24.00	Pass
EHT40	MCS0	2	107	6485	242/62	8.46	7.46	11.00	0.95		11.95	24.00	Pass
EHT80	MCS0	2	103	6465	Full	13.54	13.13	16.35	0.95		17.30	24.00	Pass
EHT80	MCS0	2	103	6465	484/65	11.13	10.69	13.93	0.95		14.88	24.00	Pass
EHT80	MCS0	2	103	6465	Puncture20/4	13.35	12.94	16.16	0.95		17.11	24.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT40	MCS0	2	115	6525	Full	11.57	10.71	14.17	0.95		15.12	24.00	Pass
EHT40	MCS0	2	115	6525	242/62	8.87	7.72	11.34	0.95		12.29	24.00	Pass
EHT80	MCS0	2	119	6545	Full	13.82	13.19	16.53	0.95		17.48	24.00	Pass
EHT80	MCS0	2	119	6545	484/66	11.43	10.97	14.22	0.95		15.17	24.00	Pass
EHT80	MCS0	2	119	6545	Puncture20/1	13.26	12.67	15.99	0.95		16.94	24.00	Pass
EHT160	MCS0	2	111	6505	Full	16.33	16.69	19.52	0.95		20.47	24.00	Pass
EHT160	MCS0	2	111	6505	996/67	14.02	13.78	16.91	0.95		17.86	24.00	Pass
EHT160	MCS0	2	111	6505	Puncture20/8	16.14	16.21	19.19	0.95		20.14	24.00	Pass
EHT160	MCS0	2	111	6505	Puncture40/4	15.71	15.81	18.77	0.95		19.72	24.00	Pass
EHT320	MCS0	2	095	6425	Full	17.36	17.98	20.69	0.95		21.64	24.00	Pass
EHT320	MCS0	2	095	6425	996*4/70	14.94	14.71	17.84	0.95		18.79	24.00	Pass
EHT320	MCS0	2	095	6425	Puncture40/8	17.22	17.89	20.58	0.95		21.53	24.00	Pass
EHT320	MCS0	2	095	6425	Puncture80/4	17.15	17.64	20.41	0.95		21.36	24.00	Pass
EHT320	MCS0	2	095	6425	Puncture80+40/6	16.99	17.13	20.07	0.95		21.02	24.00	Pass
EHT320	MCS0	2	127	6585	Full	17.41	17.67	20.55	0.95		21.50	24.00	Pass
EHT320	MCS0	2	127	6585	996*4/69	15.54	15.41	18.49	0.95		19.44	24.00	Pass
EHT320	MCS0	2	127	6585	Puncture40/8	17.31	17.21	20.27	0.95		21.22	24.00	Pass
EHT320	MCS0	2	127	6585	Puncture80/4	16.93	16.83	19.89	0.95		20.84	24.00	Pass
EHT320	MCS0	2	127	6585	Puncture80+40/6	16.45	16.15	19.31	0.95		20.26	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	097	6435	Full	0.00	0.00		-1.29	0.01		-1.28	-1.00	Pass	
EHT20	MCS0	2	097	6435	26/0	0.00	0.00		-1.43	0.01		-1.42	-1.00	Pass	
EHT20	MCS0	2	097	6435	52/37	0.00	0.00		-1.66	0.01		-1.65	-1.00	Pass	
EHT20	MCS0	2	097	6435	106/53	0.02	0.02		-1.80	0.01		-1.79	-1.00	Pass	
EHT20	MCS0	2	097	6435	52T+26T/70	0.02	0.02		-1.78	0.01		-1.77	-1.00	Pass	
EHT20	MCS0	2	105	6475	106T+26T/82	0.02	0.02		-1.84	0.01		-1.83	-1.00	Pass	
EHT20	MCS0	2	105	6475	Full	0.00	0.00		-1.10	0.01		-1.09	-1.00	Pass	
EHT20	MCS0	2	105	6475	26/4	0.00	0.00		-1.68	0.01		-1.67	-1.00	Pass	
EHT20	MCS0	2	105	6475	52/38	0.00	0.00		-2.09	0.01		-2.08	-1.00	Pass	
EHT20	MCS0	2	105	6475	106/53	0.02	0.02		-1.56	0.01		-1.55	-1.00	Pass	
EHT20	MCS0	2	113	6515	Full	0.00	0.00		-1.03	0.01		-1.02	-1.00	Pass	
EHT20	MCS0	2	113	6515	26/8	0.00	0.00		-1.15	0.01		-1.14	-1.00	Pass	
EHT20	MCS0	2	113	6515	52/40	0.00	0.00		-1.51	0.01		-1.50	-1.00	Pass	
EHT20	MCS0	2	113	6515	106/54	0.02	0.02		-1.09	0.01		-1.08	-1.00	Pass	
EHT40	MCS0	2	099	6445	Full	0.00	0.00		-1.37	0.01		-1.36	-1.00	Pass	
EHT40	MCS0	2	099	6445	242/61	0.00	0.00		-1.40	0.01		-1.39	-1.00	Pass	
EHT40	MCS0	2	107	6485	Full	0.00	0.00	-1.28	0.01		-1.27	-1.00	Pass		
EHT40	MCS0	2	107	6485	242/62	0.00	0.00	-1.54	0.01		-1.53	-1.00	Pass		
EHT80	MCS0	2	103	6465	Full	0.00	0.00	-1.45	0.01		-1.44	-1.00	Pass		
EHT80	MCS0	2	103	6465	484/65	0.06	0.06	-1.89	0.01		-1.88	-1.00	Pass		
EHT80	MCS0	2	103	6465	Puncture20/4	0.06	0.06	-1.47	0.01		-1.46	-1.00	Pass		

U-NII-6 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass. /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT40	MCS0	2	115	6525	Full	0.00	0.00			-1.05	0.01		-1.04	-1.00	Pass
EHT40	MCS0	2	115	6525	242/62	0.00	0.00			-1.07	0.01		-1.06	-1.00	Pass
EHT80	MCS0	2	119	6545	Full	0.00	0.00			-1.45	0.01		-1.44	-1.00	Pass
EHT80	MCS0	2	119	6545	484/66	0.06	0.06			-1.63	0.01		-1.62	-1.00	Pass
EHT80	MCS0	2	119	6545	Puncture20/1	0.06	0.06			-1.76	0.01		-1.75	-1.00	Pass
EHT160	MCS0	2	111	6505	Full	0.02	0.02			-1.38	0.01		-1.37	-1.00	Pass
EHT160	MCS0	2	111	6505	996/67	0.09	0.09			-1.83	0.01		-1.82	-1.00	Pass
EHT160	MCS0	2	111	6505	Puncture20/8	0.02	0.00			-1.84	0.01		-1.83	-1.00	Pass
EHT320	MCS0	2	111	6505	Puncture40/4	0.68	0.68			-1.79	0.01		-1.78	-1.00	Pass
EHT320	MCS0	2	095	6425	Full	0.02	0.02			-2.82	0.01		-2.81	-1.00	Pass
EHT320	MCS0	2	095	6425	996*4/70	0.12	0.11			-3.27	0.01		-3.26	-1.00	Pass
EHT320	MCS0	2	095	6425	Puncture40/8	0.68	0.68			-3.52	0.01		-3.51	-1.00	Pass
EHT320	MCS0	2	095	6425	Puncture80/4	0.12	0.66			-3.36	0.01		-3.35	-1.00	Pass
EHT320	MCS0	2	095	6425	Puncture80+40/6	0.12	0.11			-3.44	0.01		-3.43	-1.00	Pass
EHT320	MCS0	2	127	6585	Full	0.02	0.02			-2.85	0.01		-2.84	-1.00	Pass
EHT320	MCS0	2	127	6585	996*4/69	0.12	0.11			-3.34	0.01		-3.33	-1.00	Pass
EHT320	MCS0	2	127	6585	Puncture40/8	0.68	0.68			-3.38	0.01		-3.37	-1.00	Pass
EHT320	MCS0	2	127	6585	Puncture80/4	0.12	0.66			-3.36	0.01		-3.35	-1.00	Pass
EHT320	MCS0	2	127	6585	Puncture80+40/6	0.12	0.11			-3.42	0.01		-3.41	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	117	6535	Full	19.21	19.18	23.58	24.55	320.00	Pass
EHT20	MCS0	2	149	6695	Full	19.22	19.19	23.84	23.67	320.00	Pass
EHT20	MCS0	2	181	6855	Full	19.20	19.16	23.67	23.73	320.00	Pass
EHT40	MCS0	2	123	6565	Full	38.25	38.36	44.90	44.82	320.00	Pass
EHT40	MCS0	2	147	6685	Full	38.27	38.32	44.69	45.04	320.00	Pass
EHT40	MCS0	2	179	6845	Full	38.25	38.32	44.96	44.56	320.00	Pass
EHT40	MCS0	2	135	6625	Full	77.78	77.78	89.95	90.75	320.00	Pass
EHT80	MCS0	2	151	6705	Full	77.78	77.80	89.66	90.24	320.00	Pass
EHT80	MCS0	2	167	6785	Full	77.66	77.72	89.86	89.60	320.00	Pass
EHT160	MCS0	2	143	6665	Full	156.90	157.18	175.34	176.40	320.00	Pass

U-NII-7 straddle channel MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	185	6875	Full	19.20	19.16	23.62	23.57	320.00	Pass
EHT40	MCS0	2	187	6885	Full	38.20	38.29	44.85	45.14	320.00	Pass
EHT80	MCS0	2	183	6865	Full	77.76	77.74	90.14	88.80	320.00	Pass
EHT160	MCS0	2	175	6825	Full	156.82	157.14	176.16	173.28	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	117	6535	Full	8.13	7.14	10.67	1.01		11.68	24.00	Pass
EHT20	MCS0	2	117	6535	26/0	-1.86	-2.09	1.04	1.01		2.05	24.00	Pass
EHT20	MCS0	2	117	6535	52/37	1.32	0.82	4.09	1.01		5.10	24.00	Pass
EHT20	MCS0	2	117	6535	106/53	3.95	2.78	6.41	1.01		7.42	24.00	Pass
EHT20	MCS0	2	117	6535	52T+26T/70	2.99	2.07	5.56	1.01		6.57	24.00	Pass
EHT20	MCS0	2	117	6535	106T+26T/82	5.08	4.08	7.62	1.01		8.63	24.00	Pass
EHT20	MCS0	2	149	6695	Full	8.08	7.75	10.93	1.01		11.94	24.00	Pass
EHT20	MCS0	2	149	6695	26/4	-0.75	-0.91	2.18	1.01		3.19	24.00	Pass
EHT20	MCS0	2	149	6695	52/38	0.99	0.49	3.76	1.01		4.77	24.00	Pass
EHT20	MCS0	2	149	6695	106/53	4.41	3.33	6.91	1.01		7.92	24.00	Pass
EHT20	MCS0	2	181	6855	Full	7.57	7.41	10.50	1.01		11.51	24.00	Pass
EHT20	MCS0	2	181	6855	26/8	-1.98	-2.23	0.91	1.01		1.92	24.00	Pass
EHT20	MCS0	2	181	6855	52/40	0.53	0.08	3.32	1.01		4.33	24.00	Pass
EHT20	MCS0	2	181	6855	106/54	4.27	3.53	6.93	1.01		7.94	24.00	Pass
EHT40	MCS0	2	123	6565	Full	11.28	10.56	13.95	1.01		14.96	24.00	Pass
EHT40	MCS0	2	123	6565	242/61	8.87	8.01	11.47	1.01		12.48	24.00	Pass
EHT40	MCS0	2	147	6685	Full	10.74	10.89	13.83	1.01		14.84	24.00	Pass
EHT40	MCS0	2	147	6685	242/61	8.32	8.14	11.24	1.01		12.25	24.00	Pass
EHT40	MCS0	2	179	6845	Full	10.63	10.12	13.39	1.01		14.40	24.00	Pass
EHT40	MCS0	2	179	6845	242/62	7.98	7.48	10.75	1.01		11.76	24.00	Pass
EHT80	MCS0	2	135	6625	Full	13.92	13.62	16.78	1.01		17.79	24.00	Pass
EHT80	MCS0	2	135	6625	484/65	11.68	11.16	14.44	1.01		15.45	24.00	Pass
EHT80	MCS0	2	135	6625	Puncture20/4	13.37	12.85	16.13	1.01		17.14	24.00	Pass
EHT80	MCS0	2	151	6705	Full	13.57	13.41	16.50	1.01		17.51	24.00	Pass
EHT80	MCS0	2	151	6705	484/65	11.33	11.08	14.22	1.01		15.23	24.00	Pass
EHT80	MCS0	2	151	6705	Puncture20/1	12.79	12.68	15.75	1.01		16.76	24.00	Pass
EHT80	MCS0	2	167	6785	Full	14.02	13.38	16.72	1.01		17.73	24.00	Pass
EHT80	MCS0	2	167	6785	484/66	11.47	10.71	14.12	1.01		15.13	24.00	Pass
EHT80	MCS0	2	167	6785	Puncture20/1	13.72	13.14	16.45	1.01		17.46	24.00	Pass
EHT160	MCS0	2	143	6665	Full	16.26	17.08	19.70	1.01		20.71	24.00	Pass
EHT160	MCS0	2	143	6665	996/S67	14.13	14.03	17.09	1.01		18.10	24.00	Pass
EHT160	MCS0	2	143	6665	Puncture20/8	15.83	16.31	19.09	1.01		20.10	24.00	Pass
EHT160	MCS0	2	143	6665	Puncture40/4	15.87	16.46	19.19	1.01		20.20	24.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	185	6875	Full	7.91	7.45	10.70	1.01		11.71	24.00	Pass
EHT20	MCS0	2	185	6875	26/8	-1.78	-1.98	1.13	1.01		2.14	24.00	Pass
EHT20	MCS0	2	185	6875	52/40	0.64	0.31	3.49	1.01		4.50	24.00	Pass
EHT20	MCS0	2	185	6875	106/54	4.51	3.77	7.17	1.01		8.18	24.00	Pass
EHT40	MCS0	2	187	6885	Full	10.88	10.31	13.61	1.01		14.62	24.00	Pass
EHT40	MCS0	2	187	6885	242/62	8.33	7.61	11.00	1.01		12.01	24.00	Pass
EHT80	MCS0	2	183	6865	Full	13.63	13.43	16.54	1.01		17.55	24.00	Pass
EHT80	MCS0	2	183	6865	484/66	11.22	11.21	14.23	1.01		15.24	24.00	Pass
EHT80	MCS0	2	183	6865	Puncture20/1	12.99	12.09	15.57	1.01		16.58	24.00	Pass
EHT160	MCS0	2	175	6825	Full	16.94	17.07	20.02	1.01		21.03	24.00	Pass
EHT160	MCS0	2	175	6825	996/67	14.64	13.99	17.34	1.01		18.35	24.00	Pass
EHT160	MCS0	2	175	6825	Puncture20/8	16.72	16.82	19.78	1.01		20.79	24.00	Pass
EHT160	MCS0	2	175	6825	Puncture40/4	16.43	16.36	19.41	1.01		20.42	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	117	6535	Full	0.00	0.00			-1.54	0.07	-1.47	-1.00	Pass	
EHT20	MCS0	2	117	6535	26/0	0.00	0.00			-1.84	0.07	-1.77	-1.00	Pass	
EHT20	MCS0	2	117	6535	52/37	0.00	0.00			-1.68	0.07	-1.61	-1.00	Pass	
EHT20	MCS0	2	117	6535	106/53	0.02	0.02			-2.00	0.07	-1.93	-1.00	Pass	
EHT20	MCS0	2	117	6535	52T+26T/70	0.02	0.02			-2.03	0.07	-1.96	-1.00	Pass	
EHT20	MCS0	2	117	6535	106T+26T/82	0.02	0.02			-1.95	0.07	-1.88	-1.00	Pass	
EHT20	MCS0	2	149	6695	Full	0.00	0.00			-1.27	0.07	-1.20	-1.00	Pass	
EHT20	MCS0	2	149	6695	26/4	0.00	0.00			-1.79	0.07	-1.72	-1.00	Pass	
EHT20	MCS0	2	149	6695	52/38	0.00	0.00			-1.98	0.07	-1.91	-1.00	Pass	
EHT20	MCS0	2	149	6695	106/53	0.02	0.02			-1.68	0.07	-1.61	-1.00	Pass	
EHT20	MCS0	2	181	6855	Full	0.00	0.00			-1.54	0.07	-1.47	-1.00	Pass	
EHT20	MCS0	2	181	6855	26/8	0.00	0.00			-1.83	0.07	-1.76	-1.00	Pass	
EHT20	MCS0	2	181	6855	52/40	0.00	0.00			-2.41	0.07	-2.34	-1.00	Pass	
EHT20	MCS0	2	181	6855	106/54	0.02	0.02			-1.70	0.07	-1.63	-1.00	Pass	
EHT40	MCS0	2	123	6565	Full	0.00	0.00			-1.12	0.07	-1.05	-1.00	Pass	
EHT40	MCS0	2	123	6565	242/61	0.00	0.00			-1.12	0.07	-1.05	-1.00	Pass	
EHT40	MCS0	2	147	6685	Full	0.00	0.00			-1.17	0.07	-1.10	-1.00	Pass	
EHT40	MCS0	2	147	6685	242/61	0.00	0.00			-1.34	0.07	-1.27	-1.00	Pass	
EHT40	MCS0	2	179	6845	Full	0.00	0.00			-1.46	0.07	-1.39	-1.00	Pass	
EHT40	MCS0	2	179	6845	242/62	0.00	0.00			-1.77	0.07	-1.70	-1.00	Pass	
EHT80	MCS0	2	135	6625	Full	0.00	0.00		-1.08	0.07	-1.01	-1.00	Pass		
EHT80	MCS0	2	135	6625	484/65	0.06	0.06		-1.55	0.07	-1.48	-1.00	Pass		
EHT80	MCS0	2	135	6625	Puncture20/4	0.06	0.06		-1.47	0.07	-1.40	-1.00	Pass		
EHT80	MCS0	2	151	6705	Full	0.00	0.00		-1.56	0.07	-1.49	-1.00	Pass		
EHT80	MCS0	2	151	6705	484/65	0.06	0.06		-1.78	0.07	-1.71	-1.00	Pass		
EHT80	MCS0	2	151	6705	Puncture20/1	0.06	0.06		-1.81	0.07	-1.74	-1.00	Pass		
EHT80	MCS0	2	167	6785	Full	0.00	0.00		-1.25	0.07	-1.18	-1.00	Pass		
EHT80	MCS0	2	167	6785	484/66	0.06	0.06		-1.50	0.07	-1.43	-1.00	Pass		
EHT80	MCS0	2	167	6785	Puncture20/1	0.06	0.06		-1.32	0.07	-1.25	-1.00	Pass		
EHT160	MCS0	2	143	6665	Full	0.02	0.02		-1.35	0.07	-1.28	-1.00	Pass		
EHT160	MCS0	2	143	6665	996/S67	0.09	0.09		-1.85	0.07	-1.78	-1.00	Pass		
EHT160	MCS0	2	143	6665	Puncture20/8	0.02	0.00		-1.93	0.07	-1.86	-1.00	Pass		
EHT160	MCS0	2	143	6665	Puncture40/4	0.68	0.68		-1.40	0.07	-1.33	-1.00	Pass		

U-NII-7 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	185	6875	Full	0.00	0.00			-1.28	0.07		-1.21	-1.00	Pass
EHT20	MCS0	2	185	6875	26/8	0.00	0.00			-1.64	0.07		-1.57	-1.00	Pass
EHT20	MCS0	2	185	6875	52/40	0.00	0.00			-2.32	0.07		-2.25	-1.00	Pass
EHT20	MCS0	2	185	6875	106/54	0.02	0.02			-1.52	0.07		-1.45	-1.00	Pass
EHT40	MCS0	2	187	6885	Full	0.00	0.00			-1.35	0.07		-1.28	-1.00	Pass
EHT40	MCS0	2	187	6885	242/62	0.00	0.00			-1.42	0.07		-1.35	-1.00	Pass
EHT80	MCS0	2	183	6865	Full	0.00	0.00			-1.37	0.07		-1.30	-1.00	Pass
EHT80	MCS0	2	183	6865	484/66	0.06	0.06			-1.98	0.07		-1.91	-1.00	Pass
EHT80	MCS0	2	183	6865	Puncture20/1	0.06	0.06			-1.69	0.07		-1.62	-1.00	Pass
EHT160	MCS0	2	175	6825	Full	0.02	0.02			-1.09	0.07		-1.02	-1.00	Pass
EHT160	MCS0	2	175	6825	996/67	0.09	0.09			-1.31	0.07		-1.24	-1.00	Pass
EHT160	MCS0	2	175	6825	Puncture20/8	0.02	0.00			-1.13	0.07		-1.06	-1.00	Pass
EHT160	MCS0	2	175	6825	Puncture40/4	0.68	0.68			-1.10	0.07		-1.03	-1.00	Pass

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	189	6895	Full	19.19	19.16	23.73	23.57	320.00	Pass
EHT20	MCS0	2	209	6995	Full	19.18	19.08	23.54	22.94	320.00	Pass
EHT20	MCS0	2	229	7095	Full	19.21	19.17	23.66	23.94	320.00	Pass
EHT20	MCS0	2	233	7115	Full	19.18	19.20	23.54	23.99	320.00	Pass
EHT40	MCS0	2	195	6925	Full	38.32	38.29	43.71	45.04	320.00	Pass
EHT40	MCS0	2	211	7005	Full	38.20	38.26	44.11	43.89	320.00	Pass
EHT40	MCS0	2	227	7085	Full	38.23	38.24	45.10	44.83	320.00	Pass
EHT80	MCS0	2	199	6945	Full	77.76	77.63	88.83	87.78	320.00	Pass
EHT80	MCS0	2	215	7025	Full	77.68	77.88	90.59	89.44	320.00	Pass
EHT160	MCS0	2	207	6985	Full	156.73	156.75	171.84	173.22	320.00	Pass

U-NII-8 straddle channel MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT320	MCS0	2	159	6745	Full	317.44	317.01	350.02	348.00	320.00	Pass
EHT320	MCS0	2	191	6905	Full	316.82	315.57	347.42	346.56	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	189	6895	Full	7.96	7.42	10.71	0.73		11.44	24.00	Pass
EHT20	MCS0	2	189	6895	26/0	-1.78	-2.11	1.07	0.73		1.80	24.00	Pass
EHT20	MCS0	2	189	6895	52/37	0.98	0.51	3.76	0.73		4.49	24.00	Pass
EHT20	MCS0	2	189	6895	106/53	4.68	3.87	7.30	0.73		8.03	24.00	Pass
EHT20	MCS0	2	209	6995	Full	7.77	7.74	10.77	0.73		11.50	24.00	Pass
EHT20	MCS0	2	209	6995	26/4	0.42	-0.07	3.19	0.73		3.92	24.00	Pass
EHT20	MCS0	2	209	6995	52/38	3.11	2.57	5.86	0.73		6.59	24.00	Pass
EHT20	MCS0	2	209	6995	106/53	5.13	4.21	7.70	0.73		8.43	24.00	Pass
EHT20	MCS0	2	229	7095	Full	8.61	8.17	11.41	0.73		12.14	24.00	Pass
EHT20	MCS0	2	229	7095	26/8	-0.14	-0.23	2.83	0.73		3.56	24.00	Pass
EHT20	MCS0	2	229	7095	52/40	3.04	2.29	5.69	0.73		6.42	24.00	Pass
EHT20	MCS0	2	229	7095	106/54	5.38	5.44	8.42	0.73		9.15	24.00	Pass
EHT20	MCS0	2	229	7095	52+26/71	4.41	3.69	7.08	0.73		7.81	24.00	Pass
EHT20	MCS0	2	229	7095	106+26/83	6.91	5.86	9.43	0.73		10.16	24.00	Pass
EHT20	MCS0	2	233	7115	Full	8.66	8.06	11.38	0.73		12.11	24.00	Pass
EHT20	MCS0	2	233	7115	26/8	-0.34	-0.34	2.67	0.73		3.40	24.00	Pass
EHT20	MCS0	2	233	7115	52/40	3.17	1.97	5.62	0.73		6.35	24.00	Pass
EHT20	MCS0	2	233	7115	106/54	5.28	5.32	8.31	0.73		9.04	24.00	Pass
EHT20	MCS0	2	233	7115	52+26/71	4.43	3.63	7.06	0.73		7.79	24.00	Pass
EHT20	MCS0	2	233	7115	106+26/83	7.05	5.86	9.51	0.73		10.24	24.00	Pass
EHT40	MCS0	2	195	6925	Full	10.87	10.68	13.79	0.73		14.52	24.00	Pass
EHT40	MCS0	2	195	6925	242/61	8.51	8.16	11.35	0.73		12.08	24.00	Pass
EHT40	MCS0	2	211	7005	Full	11.08	10.82	13.96	0.73		14.69	24.00	Pass
EHT40	MCS0	2	211	7005	242/62	9.39	8.87	12.15	0.73		12.88	24.00	Pass
EHT40	MCS0	2	227	7085	Full	11.69	11.03	14.38	0.73		15.11	24.00	Pass
EHT40	MCS0	2	227	7085	242/62	9.47	8.78	12.15	0.73		12.88	24.00	Pass
EHT80	MCS0	2	199	6945	Full	13.66	14.07	16.88	0.73		17.61	24.00	Pass
EHT80	MCS0	2	199	6945	484/65	11.65	11.17	14.43	0.73		15.16	24.00	Pass
EHT80	MCS0	2	199	6945	Puncture20/1	13.11	12.69	15.92	0.73		16.65	24.00	Pass
EHT80	MCS0	2	215	7025	Full	13.91	13.98	16.96	0.73		17.69	24.00	Pass
EHT80	MCS0	2	215	7025	484/66	12.38	12.02	15.21	0.73		15.94	24.00	Pass
EHT80	MCS0	2	215	7025	Puncture20/1	13.71	13.51	16.62	0.73		17.35	24.00	Pass
EHT160	MCS0	2	207	6985	Full	16.47	17.16	19.84	0.73		20.57	24.00	Pass
EHT160	MCS0	2	207	6985	996/S67	13.68	13.65	16.68	0.73		17.41	24.00	Pass
EHT160	MCS0	2	207	6985	Puncture20/1	16.32	16.59	19.47	0.73		20.20	24.00	Pass
EHT160	MCS0	2	207	6985	Puncture40/1	15.81	15.72	18.78	0.73		19.51	24.00	Pass

U-NII-8 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT320	MCS0	2	159	6745	Full	17.31	17.66	20.50	0.73		21.23	24.00	Pass
EHT320	MCS0	2	159	6745	996*4/70	13.85	13.68	16.78	0.73		17.51	24.00	Pass
EHT320	MCS0	2	159	6745	Puncture40/8	17.07	16.92	20.01	0.73		20.74	24.00	Pass
EHT320	MCS0	2	159	6745	Puncture80/4	16.75	16.73	19.75	0.73		20.48	24.00	Pass
EHT320	MCS0	2	159	6745	Puncture80+40/6	16.18	16.04	19.12	0.73		19.85	24.00	Pass
EHT320	MCS0	2	191	6905	Full	17.69	17.95	20.83	0.73		21.56	24.00	Pass
EHT320	MCS0	2	191	6905	996*4/70	13.02	12.55	15.80	0.73		16.53	24.00	Pass
EHT320	MCS0	2	191	6905	Puncture40/1	15.88	15.43	18.67	0.73		19.40	24.00	Pass
EHT320	MCS0	2	191	6905	Puncture80/1	14.76	14.35	17.57	0.73		18.30	24.00	Pass
EHT320	MCS0	2	191	6905	Puncture80+40/7	15.02	14.66	17.85	0.73		18.58	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density


U-NII-8 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	189	6895	Full	0.00	0.00		-1.27	-0.13		-1.40	-1.00	Pass	
EHT20	MCS0	2	189	6895	26/0	0.00	0.00		-1.81	-0.13		-1.94	-1.00	Pass	
EHT20	MCS0	2	189	6895	52/37	0.00	0.00		-2.02	-0.13		-2.15	-1.00	Pass	
EHT20	MCS0	2	189	6895	106/53	0.02	0.02		-1.42	-0.13		-1.55	-1.00	Pass	
EHT20	MCS0	2	209	6995	Full	0.00	0.00		-1.07	-0.13		-1.20	-1.00	Pass	
EHT20	MCS0	2	209	6995	26/4	0.00	0.00		-1.15	-0.13		-1.28	-1.00	Pass	
EHT20	MCS0	2	209	6995	52/38	0.00	0.00		-1.49	-0.13		-1.62	-1.00	Pass	
EHT20	MCS0	2	209	6995	106/53	0.02	0.02		-1.38	-0.13		-1.51	-1.00	Pass	
EHT20	MCS0	2	229	7095	Full	0.00	0.00		-1.12	-0.13		-1.25	-1.00	Pass	
EHT20	MCS0	2	229	7095	26/8	0.02	0.02		-1.17	-0.13		-1.30	-1.00	Pass	
EHT20	MCS0	2	229	7095	52/40	0.02	0.02		-1.29	-0.13		-1.42	-1.00	Pass	
EHT20	MCS0	2	229	7095	106/54	0.02	0.02		-1.48	-0.13		-1.61	-1.00	Pass	
EHT20	MCS0	2	229	7095	52+26/71	0.02	0.02		-1.79	-0.13		-1.92	-1.00	Pass	
EHT20	MCS0	2	229	7095	106+26/83	0.02	0.02		-1.48	-0.13		-1.61	-1.00	Pass	
EHT20	MCS0	2	233	7115	Full	0.00	0.00		-0.94	-0.13		-1.07	-1.00	Pass	
EHT20	MCS0	2	233	7115	26/8	0.00	0.00		-1.07	-0.13		-1.20	-1.00	Pass	
EHT20	MCS0	2	233	7115	52/40	0.00	0.00		-1.16	-0.13		-1.29	-1.00	Pass	
EHT20	MCS0	2	233	7115	106/54	0.02	0.02		-1.42	-0.13		-1.55	-1.00	Pass	
EHT20	MCS0	2	233	7115	52+26/71	0.02	0.02		-1.55	-0.13		-1.68	-1.00	Pass	
EHT20	MCS0	2	233	7115	106+26/83	0.02	0.02		-1.27	-0.13		-1.40	-1.00	Pass	
EHT40	MCS0	2	195	6925	Full	0.00	0.00		-1.03	-0.13		-1.16	-1.00	Pass	
EHT40	MCS0	2	195	6925	242/61	0.00	0.00		-1.34	-0.13		-1.47	-1.00	Pass	
EHT40	MCS0	2	211	7005	Full	0.00	0.00		-0.88	-0.13		-1.01	-1.00	Pass	
EHT40	MCS0	2	211	7005	242/62	0.00	0.00		-0.96	-0.13		-1.09	-1.00	Pass	
EHT40	MCS0	2	227	7085	Full	0.00	0.00		-1.16	-0.13		-1.29	-1.00	Pass	
EHT40	MCS0	2	227	7085	242/62	0.00	0.00		-1.33	-0.13		-1.46	-1.00	Pass	
EHT80	MCS0	2	199	6945	Full	0.00	0.00		-0.98	-0.13		-1.11	-1.00	Pass	
EHT80	MCS0	2	199	6945	484/65	0.06	0.06		-1.13	-0.13		-1.26	-1.00	Pass	
EHT80	MCS0	2	199	6945	Puncture20/1	0.06	0.06		-1.31	-0.13		-1.44	-1.00	Pass	
EHT80	MCS0	2	215	7025	Full	0.00	0.00		-0.97	-0.13		-1.10	-1.00	Pass	
EHT80	MCS0	2	215	7025	484/66	0.06	0.06		-1.43	-0.13		-1.56	-1.00	Pass	
EHT80	MCS0	2	215	7025	Puncture20/1	0.06	0.06		-1.44	-0.13		-1.57	-1.00	Pass	
EHT160	MCS0	2	207	6985	Full	0.02	0.02	-1.29	-0.13		-1.42	-1.00	Pass		
EHT160	MCS0	2	207	6985	996/S67	0.09	0.09	-1.46	-0.13		-1.59	-1.00	Pass		
EHT160	MCS0	2	207	6985	Puncture20/1	0.02	0.00	-1.45	-0.13		-1.58	-1.00	Pass		
EHT160	MCS0	2	207	6985	Puncture40/1	0.68	0.68	-1.54	-0.13		-1.67	-1.00	Pass		

U-NII-8 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT320	MCS0	2	159	6745	Full	0.02	0.02			-3.44	-0.13		-3.57	-1.00	Pass
EHT320	MCS0	2	159	6745	996*4/70	0.12	0.11			-3.93	-0.13		-4.06	-1.00	Pass
EHT320	MCS0	2	159	6745	Puncture40/8	0.68	0.68			-3.60	-0.13		-3.73	-1.00	Pass
EHT320	MCS0	2	159	6745	Puncture80/4	0.12	0.66			-3.57	-0.13		-3.70	-1.00	Pass
EHT320	MCS0	2	159	6745	Puncture80+40/6	0.12	0.11			-3.57	-0.13		-3.70	-1.00	Pass
EHT320	MCS0	2	191	6905	Full	0.02	0.02			-4.49	-0.13		-4.62	-1.00	Pass
EHT320	MCS0	2	191	6905	996*4/70	0.12	0.11			-4.90	-0.13		-5.03	-1.00	Pass
EHT320	MCS0	2	191	6905	Puncture40/1	0.68	0.68			-5.15	-0.13		-5.28	-1.00	Pass
EHT320	MCS0	2	191	6905	Puncture80/1	0.12	0.66			-5.42	-0.13		-5.55	-1.00	Pass
EHT320	MCS0	2	191	6905	Puncture80+40/7	0.12	0.11			-5.12	-0.13		-5.25	-1.00	Pass

**Test Result of 26dB & 99% Occupied Bandwidth**


MIMO <Ant. 6+7>

<802.11a>


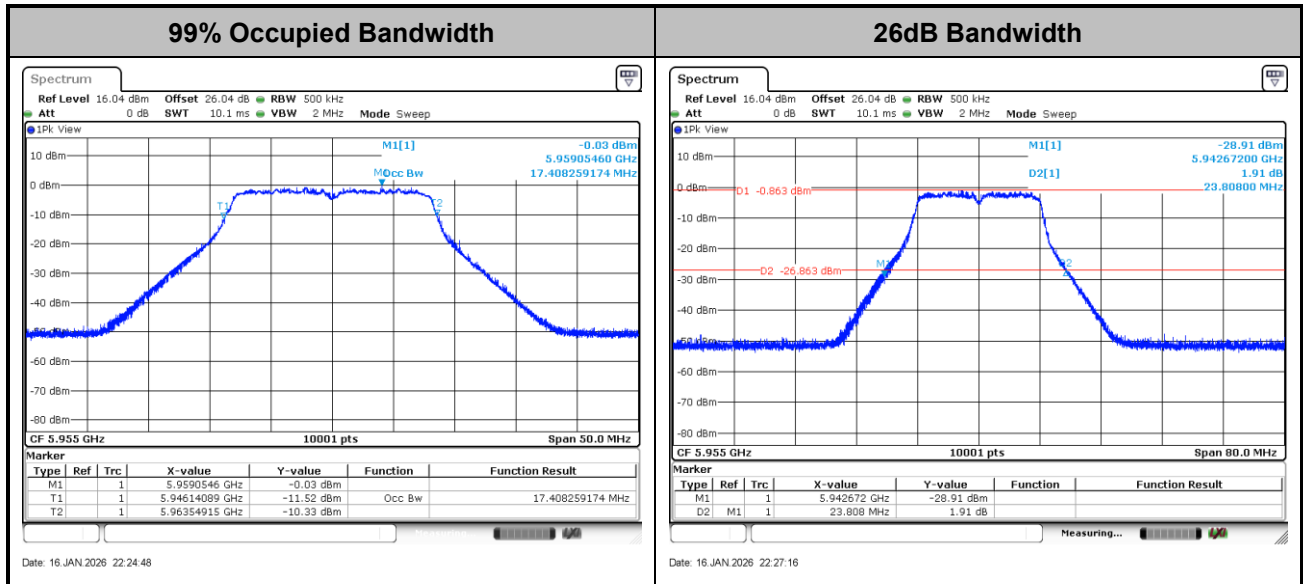
**Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.**

**Test Result of Power Spectral Density**

<802.11a>

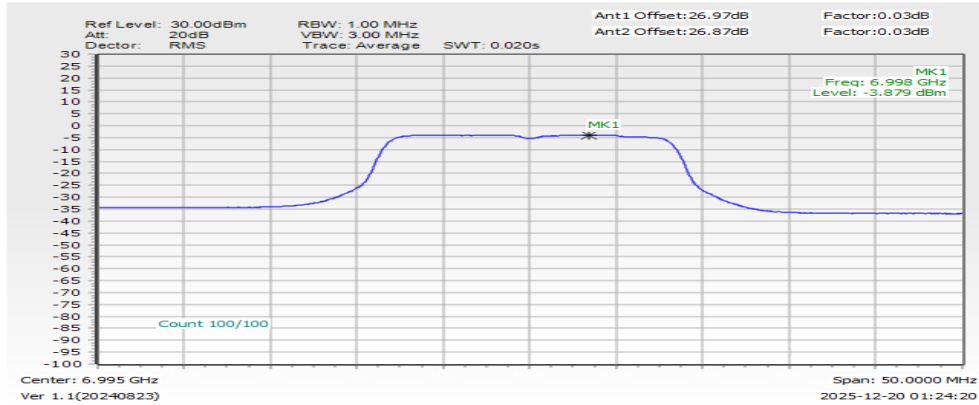Maximum Power Density Plot (dBm/MHz)**Note:**

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

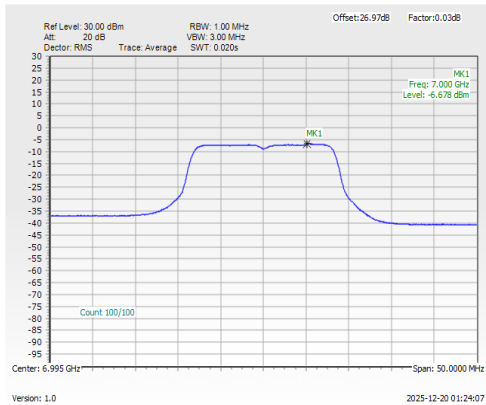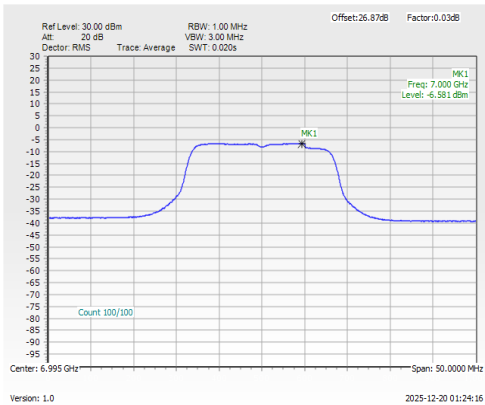Power Density Plot Trace 1 (Ant 6)**Power Density Plot Trace 2 (Ant 7)**




In-Band Emissions (Channel Mask)

MIMO <Ant. 6+7(Ant6)>

EUT Mode


802.11a

Plot on 5955 MHz

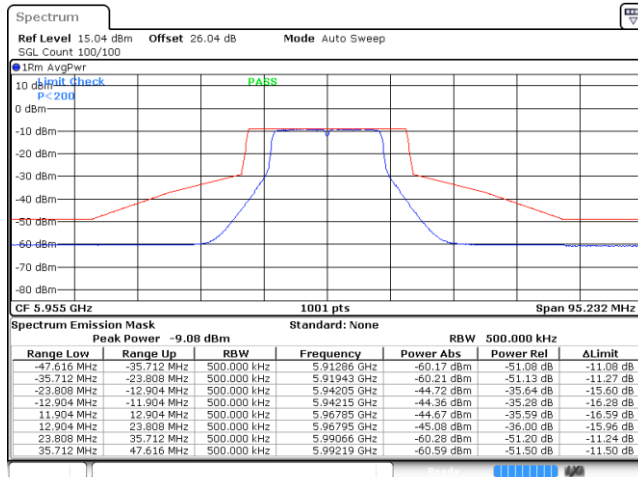


Date: 16 JAN 2026 22:28:29

Plot on 6195 MHz

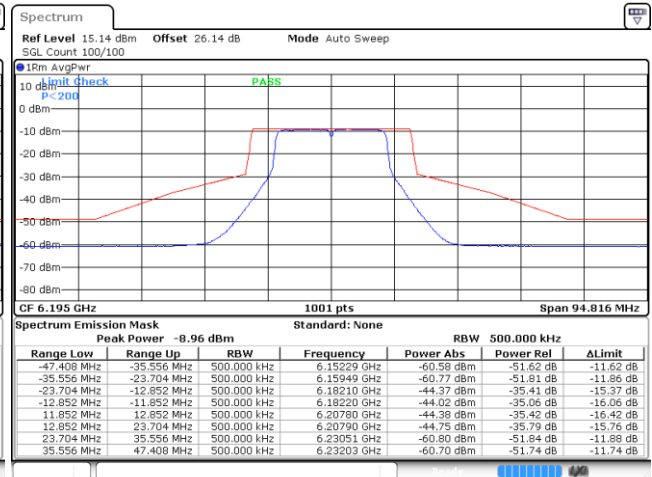


Date: 16 JAN 2026 22:32:57

Plot on 6415 MHz

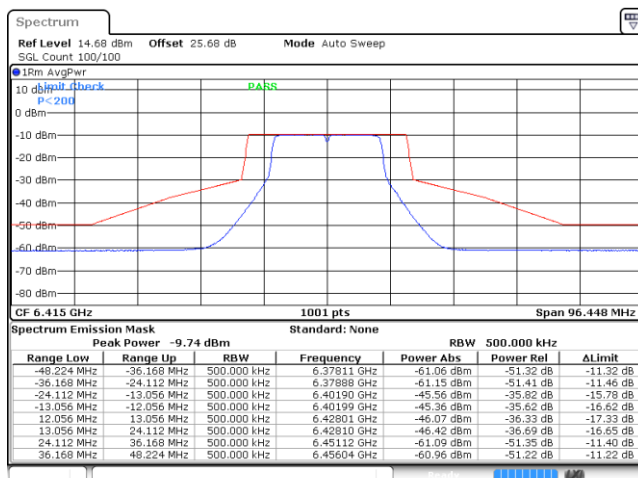

Date: 16 JAN 2026 22:36:09


Plot on 6435 MHz

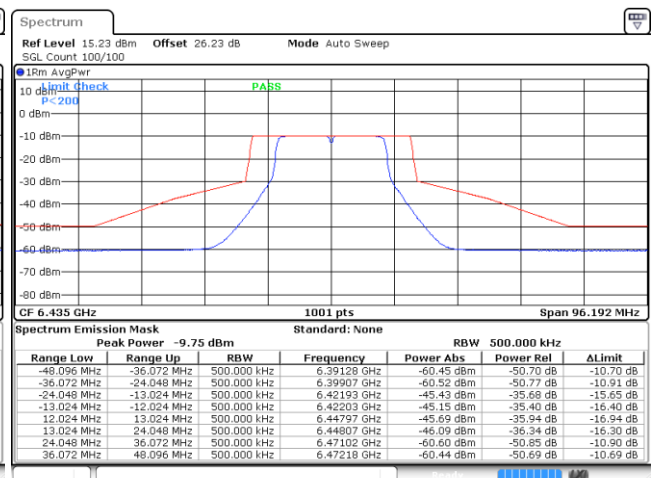

Date: 16 JAN 2026 22:38:34




Plot on 6475 MHz

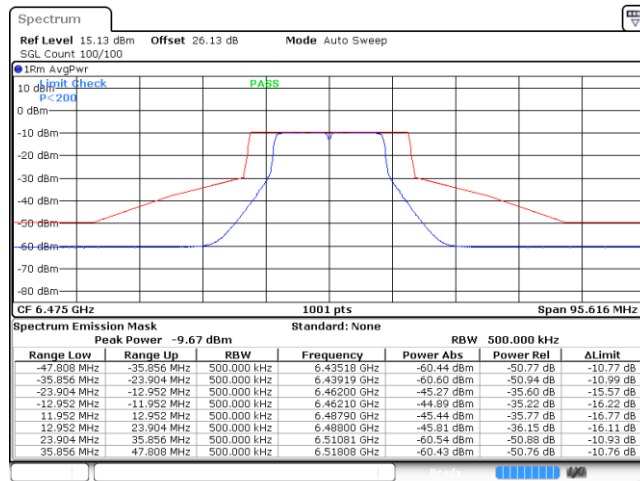


Date: 16 JAN 2026 23:05:15

Plot on 6515 MHz

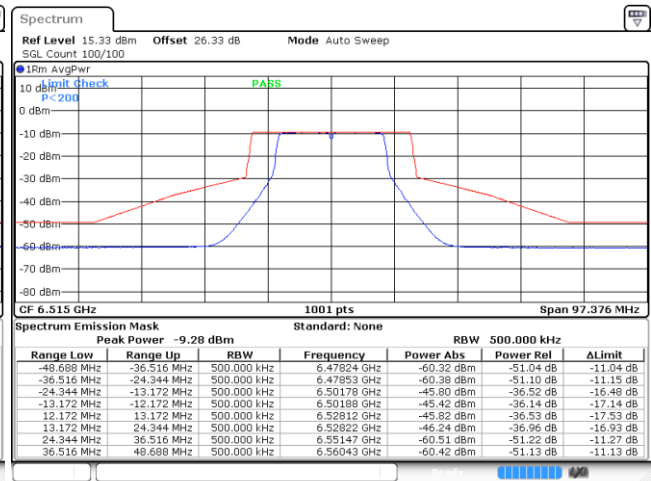


Date: 16 JAN 2026 23:10:26

Plot on 6535 MHz

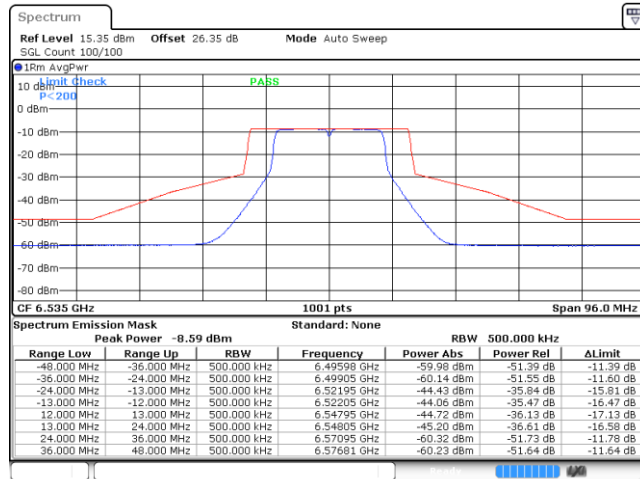

Date: 16 JAN 2026 23:14:29


Plot on 6695 MHz

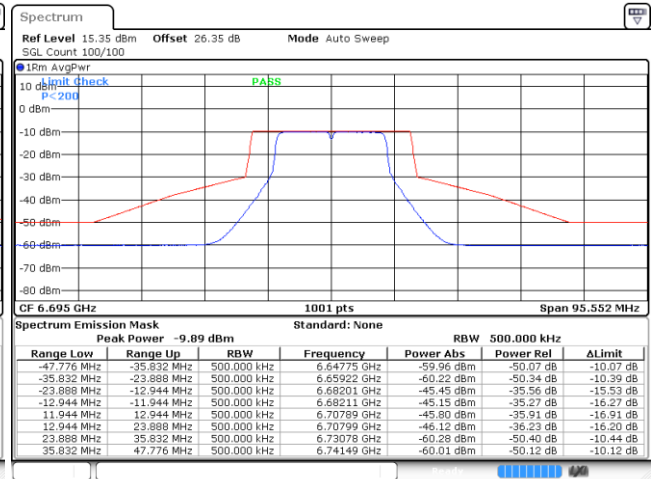

Date: 16 JAN 2026 23:19:26




Plot on 6855 MHz

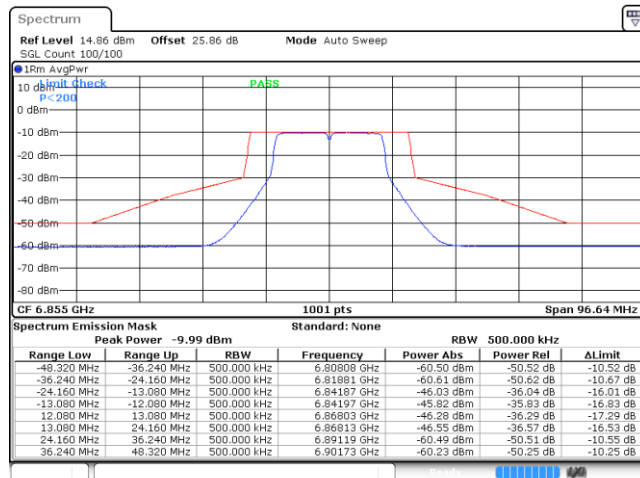


Date: 16 JAN 2026 23:23:11

Plot on 6875 MHz

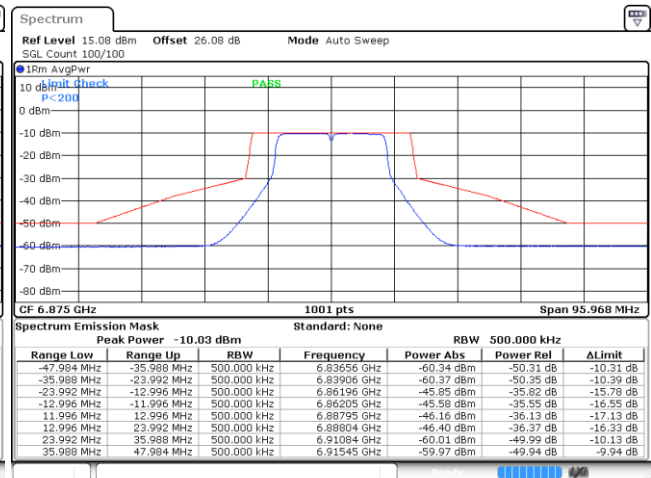


Date: 16 JAN 2026 23:38:17

Plot on 6895 MHz

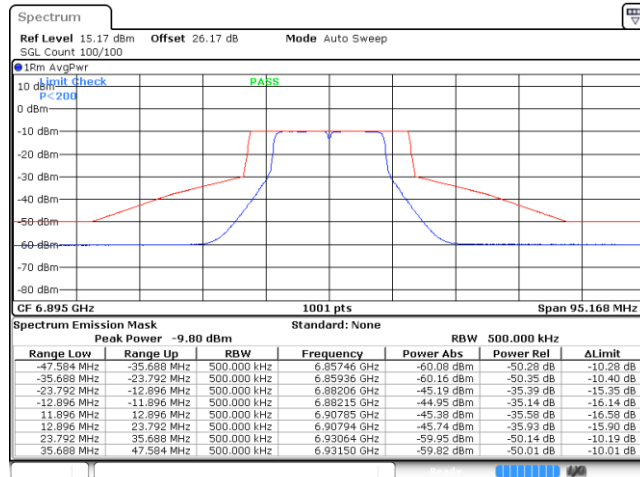

Date: 16 JAN 2026 23:44:09


Plot on 6995 MHz

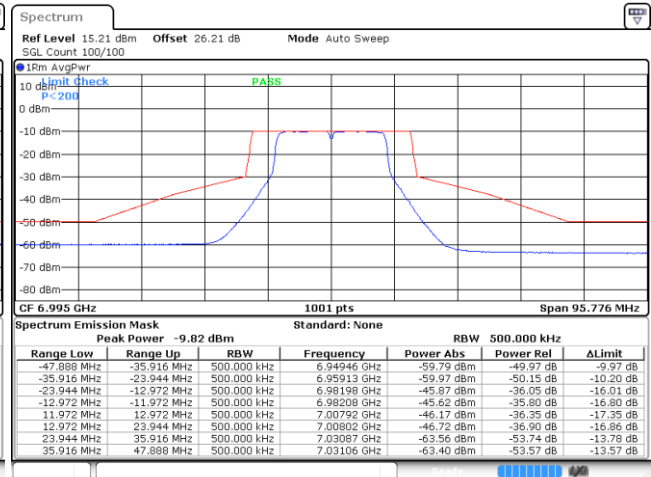

Date: 17 JAN 2026 00:06:22




Plot on 7095 MHz

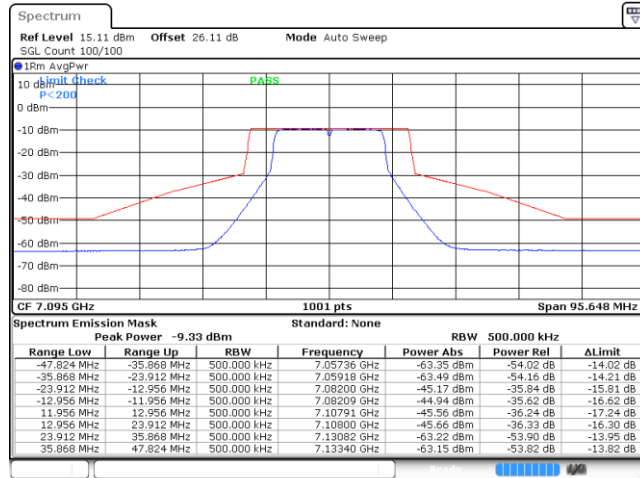

Date: 17.JAN.2026 00:11:10

Plot on 7115 MHz

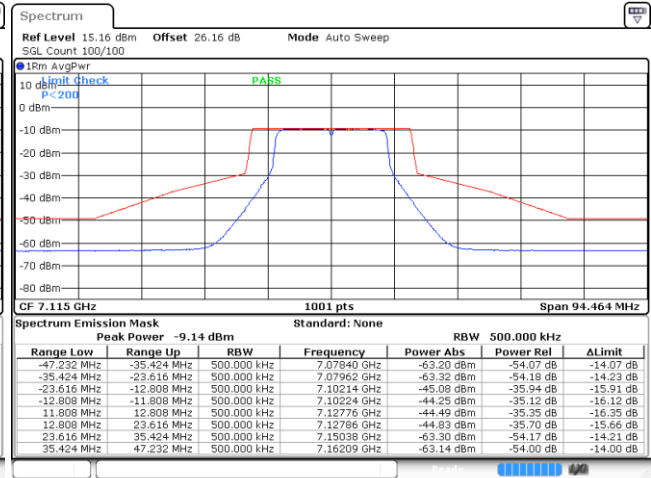

Date: 17.JAN.2026 00:18:33




MIMO <Ant. 6+7(Ant7)>

EUT Mode


802.11a

Plot on 5955 MHz

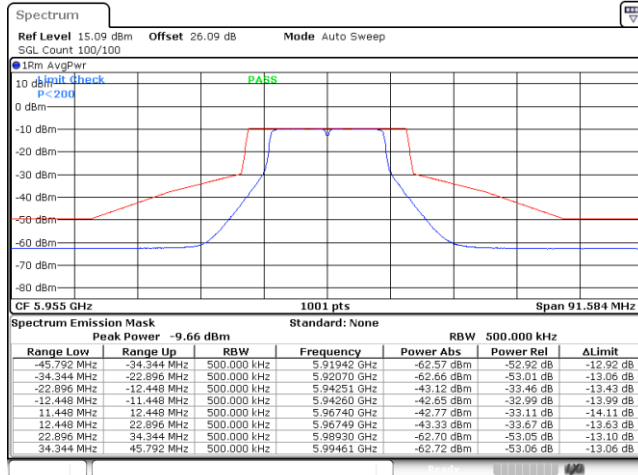


Date: 16.JAN.2026 22:18:29

Plot on 6195 MHz

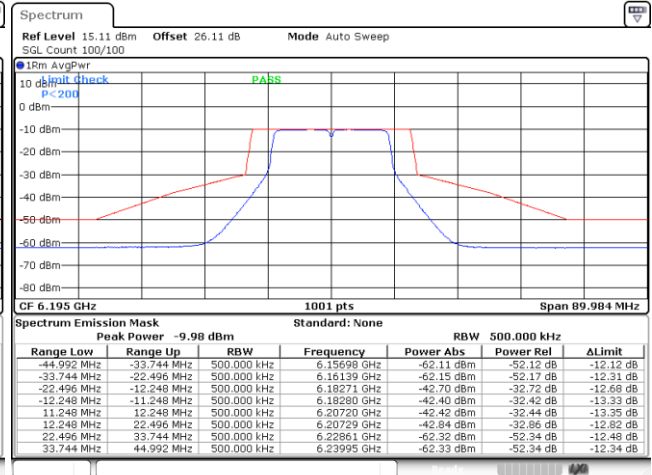


Date: 16.JAN.2026 22:22:57

Plot on 6415 MHz

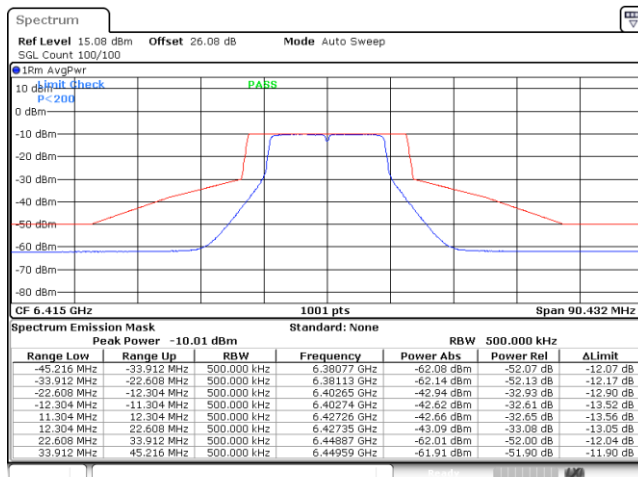

Date: 16.JAN.2026 22:26:09


Plot on 6435 MHz

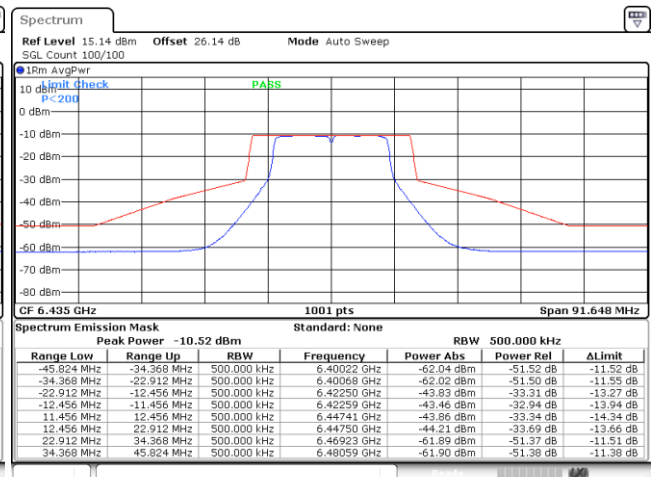

Date: 16.JAN.2026 22:28:33




Plot on 6475 MHz

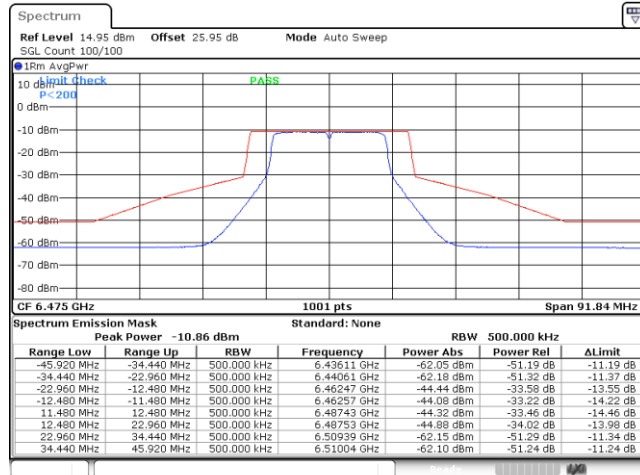


Date: 16.JAN.2026 22:55:16

Plot on 6515 MHz

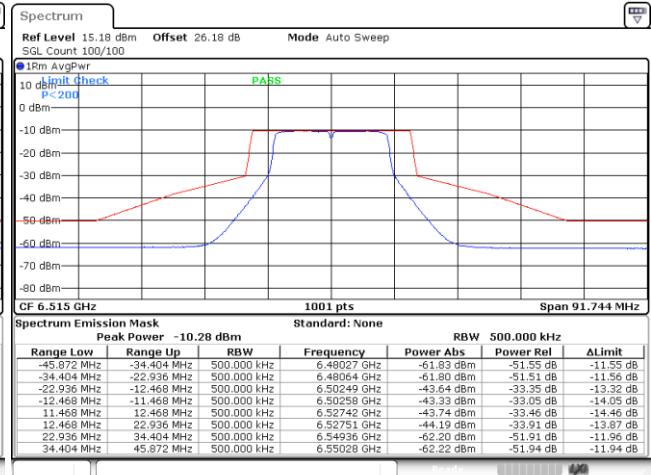


Date: 16.JAN.2026 23:00:26

Plot on 6535 MHz

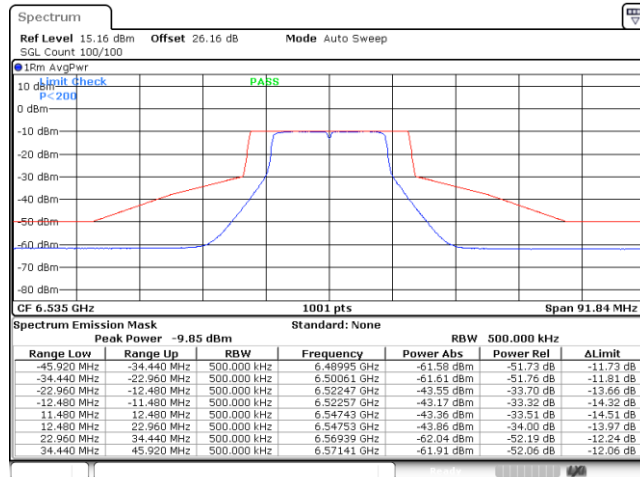

Date: 16.JAN.2026 23:04:28


Plot on 6695 MHz

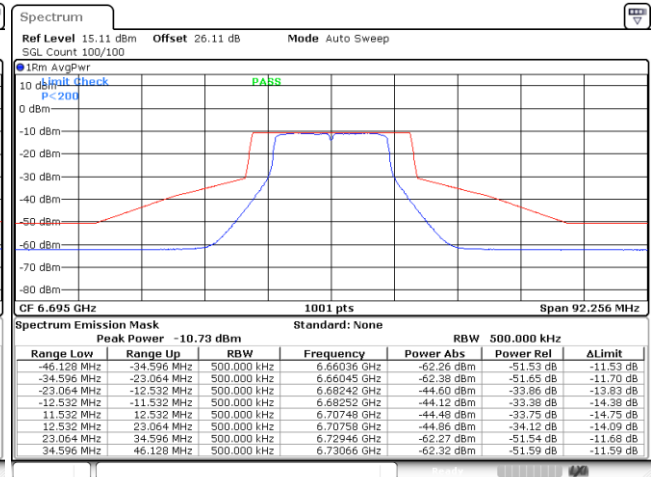

Date: 16.JAN.2026 23:09:25




Plot on 6855 MHz

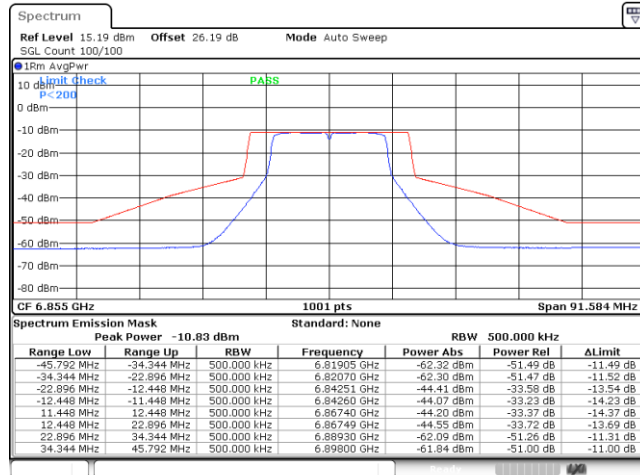


Date: 16.JAN.2026 23:13:10

Plot on 6875 MHz

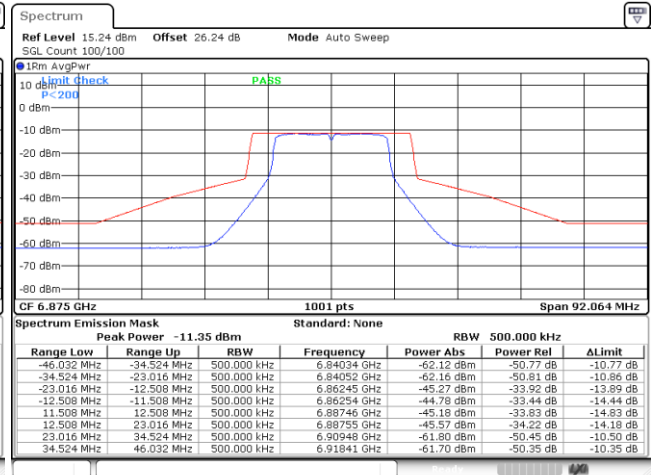


Date: 16.JAN.2026 23:16:07

Plot on 6895 MHz

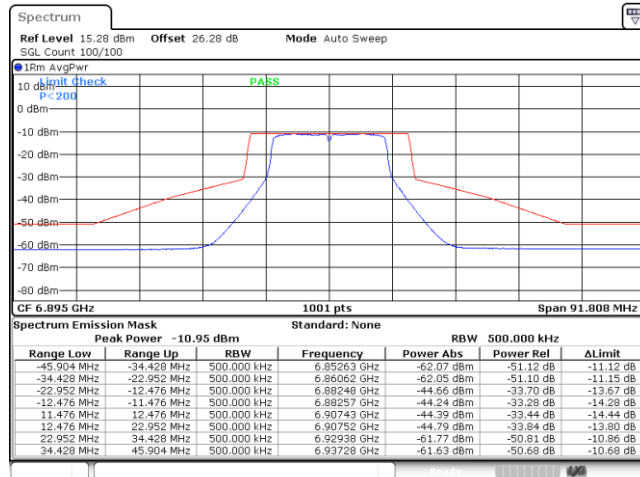

Date: 16.JAN.2026 23:34:09

Plot on 6995 MHz

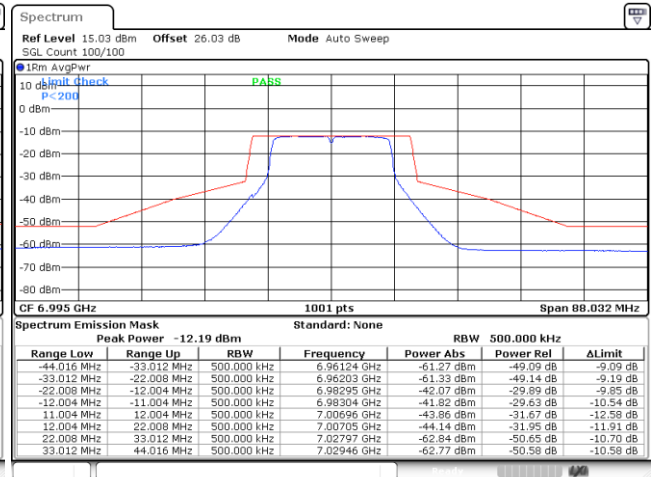

Date: 16.JAN.2026 23:56:22