




FCC RADIO TEST REPORT

FCC ID : UZ7TCW010
Equipment : Touch Computer
Brand Name : ZEBRA
Model Name : TCW010
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 28, 2025 and testing was performed from Dec. 12, 2025 to Feb. 15, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	9
1.4 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	16
2.5 EUT Operation Test Setup	16
2.6 Measurement Results Explanation Example.....	16
3 Test Result	17
3.1 26dB & 99% Occupied Bandwidth Measurement	17
3.2 Fundamental Maximum EIRP Measurement	18
3.3 Fundamental Power Spectral Density Measurement	19
3.4 In-Band Emissions (Channel Mask)	21
3.5 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC) ..	23
3.6 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	25
3.7 Unwanted Emissions Measurement.....	31
3.8 AC Conducted Emission Measurement.....	35
3.9 Antenna Requirements.....	37
4 List of Measuring Equipment.....	38
5 Measurement Uncertainty	40
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N0610-01I	01	Initial issue of report	Mar. 26, 2026
FR5N0610-01I	02	Revise Product Feature of Equipment Under Test This report is an updated version, replacing the report issued on Mar. 26, 2026.	Mar. 31, 2026
FR5N0610-01I	03	Revise Antenna Directional Gain, Test Configuration of Equipment Under Test and Appendix A This report is an updated version, replacing the report issued on Mar. 31, 2026.	May 27, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a) (7)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a) (7)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	See Note
3.5	15.407 KDB 987594 D02 Section II. L.	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point(APC)	Pass	-
0	15.407 KDB 987594 D02 Section II. K.	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	Pass	-
3.7	15.407(b)	Unwanted Emissions	Pass	1.14 dB under the limit at 5923.98 MHz
3.8	15.207	AC Conducted Emission	Pass	10.38 dB under the limit at 1.59 MHz
3.9	15.203	Antenna Requirement	Pass	-

Note: The receiver circuitry is the same for the CBP mechanism so testing can be performed once based on LPI report to show compliance

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Aya Yang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	ZEBRA
Model Name	TCW010
FCC ID	UZ7TCW010
Sample 1	Basic + SE4730(SR500)
Sample 2	Basic + SE56(AC670)
Sample 3	Premium + SE4730(SR500)
Sample 4	Premium + SE56(AC670)
Sample 5	HC_Basic (no scanner)
Sample 6	HC_Premium + SE4730(SR500)
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be ETH20/ ETH 40/ ETH 80/ ETH 160/ ETH 320 Bluetooth BR/EDR/LE
SW Version	15-12-29.00-VG-U00-PRD-ERS-04
FW Version	FUSION_QA_7_1.3.0.002_V
MFD	18-Nov-25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery 1 (1x)	Brand Name	Zebra	Part Number	BT-000473-0020
Battery 2 (1.5x)	Brand Name	Zebra	Part Number	BT-000473-0820
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC2X-USBC-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack.	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-02
USB-C to 3.5mm adapter cable	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
HS2100 rugged wired headset	Brand Name	Zebra	Part Number	HS2100-BTN-LSB
HS2100 Headset Cable for connecting the HS2100 Headset via 3.5mm	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Rugged boot	Brand Name	Zebra	Part Number	SG-TC2L-BOOT-01
Handstrap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Trigger Handle	Brand Name	Zebra	Model Name	CRG-TC2L-SNP1-01
Arm Mounts	Brand Name	Zebra	Part Number	SG-TC2L-ARMNT-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01
HS3100 rugged Bluetooth headset	Brand Name	Zebra	Part Number	HS3100-OTH

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard								
Tx/Rx Channel Frequency Range	5925 MHz ~ 6425 MHz 6525 MHz ~ 6875 MHz							
Antenna Type / Gain	<5925 MHz ~ 6425 MHz> <Ant. 6>: IFA Antenna with gain -1.06 dBi <Ant. 7>: IFA Antenna with gain 0.87 dBi <6525 MHz ~ 6875 MHz> <Ant. 6>: IFA Antenna with gain -1.13 dBi <Ant. 7>: IFA Antenna with gain 1.01 dBi							
Type of Modulation	802.11a : OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ax : OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096-QAM)							
Antenna Function Description	<table border="1"> <thead> <tr> <th></th><th>Ant. 6</th><th>Ant. 7</th></tr> </thead> <tbody> <tr> <td>802.11a/ax/be MIMO</td><td>V</td><td>V</td></tr> </tbody> </table>			Ant. 6	Ant. 7	802.11a/ax/be MIMO	V	V
	Ant. 6	Ant. 7						
802.11a/ax/be MIMO	V	V						

Remark:

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. 802.11be Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Chain Port 0 Ant 6 (dBi)	Chain Port 1 Ant 7 (dBi)	DG for Power (dBi)	DG for PSD (dBi)
5925 MHz ~ 6425 MHz	-1.06	0.87	0.87	2.97
6525 MHz ~ 6875 MHz	-1.13	1.01	1.01	3.02

Calculation example:

If a device has two antenna, $G_{ANT6} = -1.06$ dBi; $G_{ANT7} = 0.87$ dBi

Directional gain of power measurement = $\max(-1.06, 0.87) + 0 = 0.87$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(-1.06 \text{ dBi} / 20)} + 10^{(0.87 \text{ dBi} / 20)} \right]^2 / 2 \right\} \\ = 2.97 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

<For SDM Mode>

SDM mode all transmit signals are completely uncorrelated, then

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)d)ii)

The Directional gain = $10 \cdot \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG
			for	for
	Ant 7	Ant 6	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
5925 MHz ~ 6425 MHz	0.87	-1.06	0.87	0.01
6425 MHz ~ 6525 MHz	0.95	-1.20	0.95	0.01
6525 MHz ~ 6875 MHz	1.01	-1.13	1.01	0.07
6875 MHz ~ 7125 MHz	0.73	-1.20	0.73	-0.13

Calculation example:

If a device has two antenna, $G_{ANT7} = 0.87\text{dBi}$; $G_{ANT6} = -1.06\text{dBi}$

Directional gain is derived from formula which is

$$10 \times \log \left\{ \left[10^{(0.87 \text{ dBi} / 10)} + 10^{(-1.06 \text{ dBi} / 10)} \right] / 2 \right\}$$

$$= 0.01 \text{ dBi}$$

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY (TAF Code: 1190)
Remark	The Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point(APC) and Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP test items subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH17-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ♦FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦FCC KDB 662911 D01 Multiple Transmitter Output v02r01
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Y plane with Adapter as worst plane.

The device WIFI MIMO support 1S2T (CDD & Tx Beamforming) (Nss=1) mode & SDM (2S2T :Nss=2) mode by manufacturer declared.

For 802.11a, it does not support SDM & Tx Beamforming so the correlated gain for CDD is applied. For 802.11be mode, in CDD mode the conducted power is set to the same level as TXBF/SDM, Since the maximum array gain for a two antenna system is 3dB so the TXBF/SDM compliance is met by testing CDD mode as worst mode for standard power mode.

802.11be support full RU tone and partial RU tone, both full RU and partial are tested for conducted power/PSD in appendix A, for Channel Mask in section 3.4.5, all the other test case were performed with full RU with its maximum power/PSD.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 320M	Channel	31							
	Freq. (MHz)	6105							



BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	63							
	Freq. (MHz)	6265							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel		117	121	125
	Freq. (MHz)		6535	6555	6575
BW 40M	Channel			123	
	Freq. (MHz)			6565	

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181		
	Freq. (MHz)	6755	6775	6795	6815	6835	6855		
BW 40M	Channel	163		171		179			
	Freq. (MHz)	6765		6805		6845			
BW 80M	Channel	167							
	Freq. (MHz)	6785							

2.2 Test Mode

This device support 26/52/106/242/484/996/2*996/4*996-tone RU, M-RU and channel puncture.

The PSD of partial RU, M-RU and channel puncture are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel, 996-tone RU is covered by 80MHz channel, 2*996-tone RU is covered by 160MHz channel and 4*996-tone RU is covered by 320MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Specification	MCS index /Data Rate
802.11a	6 Mbps
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT 320	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.



This device supports WiFi 7 puncturing and Multi RU features.


80M channel puncturing 20M M-RU_RU484+RU242	1		242	484				
	2	242		484				
	3	484			242			
	4	484		242				
160M channel puncturing 20M M-RU_RU996+RU484+RU242	1		242	484	996			
	2	242		484	996			
	3	484			242	996		
	4	484		242		996		
	5	996				242	484	
	6	996			242		484	
	7	996			484		242	
	8	996			484	242		
160M channel puncturing 40M M-RU_RU996+RU484	1			484	996			
	2	484			996			
	3	996					484	
	4	996			484			
320M channel puncturing 40M M-RU_RU484+RU996+RU996+RU996	1			484	996		996	996
	2	484			996		996	996
	3	996					484	996
	4	996			484			996
	5	996			996			484
	6	996			996		484	996
	7	996			996		996	
	8	996			996		996	484
320M channel puncturing 80M M-RU_RU996+RU996+RU996	1				996		996	996
	2	996					996	996
	3	996			996			
	4	996			996		996	
320M channel puncturing 40M+80M M-RU_RU484+RU996+RU996	1			484	996		996	
	2	484			996		996	
	3	996					484	996
	4	996			484			996
	5	996			996			484
	6	996			996		484	


	7			484	996	996
	8		484		996	996
	9		996		484	996
	10		996	484		996
	11		996	996		484
	12		996	996	484	

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G link + BT Idle with HS3100 BT headset + Scanner + 1.5xBattery + USB cable data link with Notebook + Copy data from NB to EDA(eMMC)
Remark: - For Radiated Test Cases, the tests were performed with Sample 1. - Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<WLAN Tx with Adapter Mode>

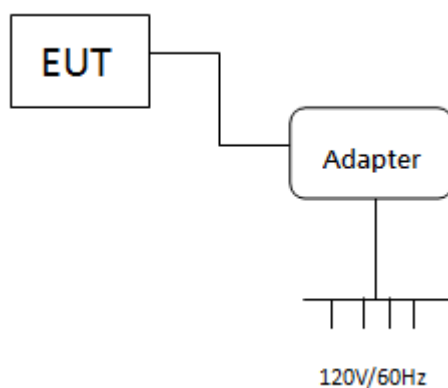
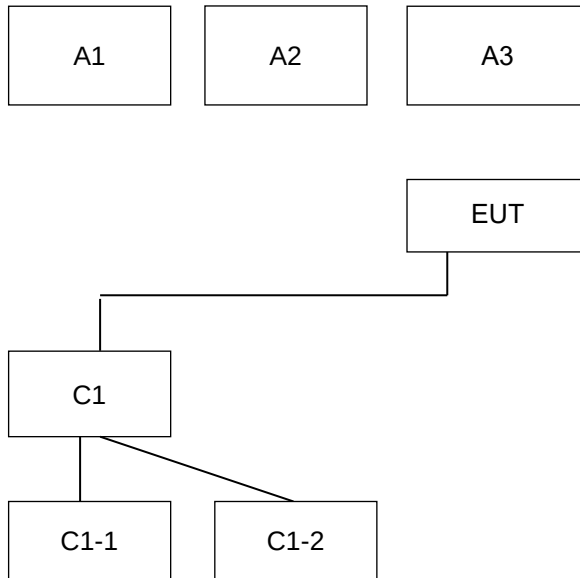
<AC Conducted Emission Mode>


Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1						
A1	BT Earphone	Bluetooth	X						
A2	AP router	WiFi	X						
A3	Bar code	scanner	X						
No.	Power Source	Connection Type	1						
C1	Notebook	USB Cable	X						
C1-1	iPod	USB Cable to C1	X						
C1-2	AP router	RJ-45 Cable to C1	X						

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8m
2.	NOTE BOOK	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	iPod	Apple	A1199	DoC	Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT v4.1 Version 4.0.170.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

For EIRP output power:

The EIRP output power result is derived from RF conducted power plus directional antenna gain.

EIRP = RF conducted power + directional antenna gain.

Following shows an offset computation example with conducted power 20.2 dBm and directional antenna gain 3dBi.

$$\begin{aligned} \text{EIRP(dBm)} &= \text{RF conducted power(dBm)} + \text{directional antenna gain(dBi)}. \\ &= 20.2 + 3 = 23.2 \text{ (dBm)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC CFR 15.407>

(a)(11) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

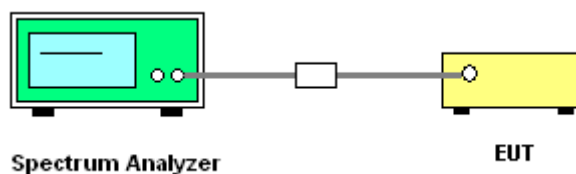

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

Note: The EBW spectrum setting is as following table for different nominal bandwidth.

setting	20MHz	40MHz	80MHz	160MHz
RBW	300kHz	1MHz	1MHz	2MHz
VBW	1MHz	3MHz	3MHz	10MHz

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access

point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

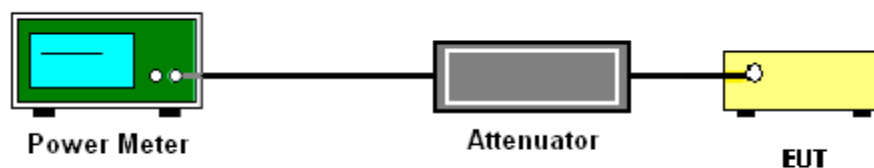

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access

point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output **v02r01**.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

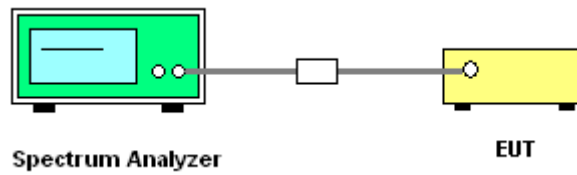

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

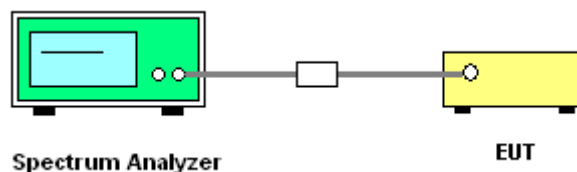

3.4.5 Test Result

Please refer to Appendix A.



3.5 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

3.5.1 Limit of Standard Client Proper Power Adjustment

15.407 KDB 987594 D02 Section II. L. Power limits for standard client devices

c) The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point

3.5.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v3.

Section L. Proper Power Adjustment

3.5.3 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

Test procedure to show that the client device can lower its power accordingly.

3.5.4 Test Procedure:

1. Connect equipment as shown in Figure 7 below.
2. Adjust Atten 1 to Std Power AP so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure the Client and AP so that they associate and start sending data (stream data). The AP should be configured such that its registered power is 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Use this power, along with its antenna gain, to calculate the Client EIRP.
6. The Client EIRP should be minimally 6 dB lower than that of the AP.
7. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

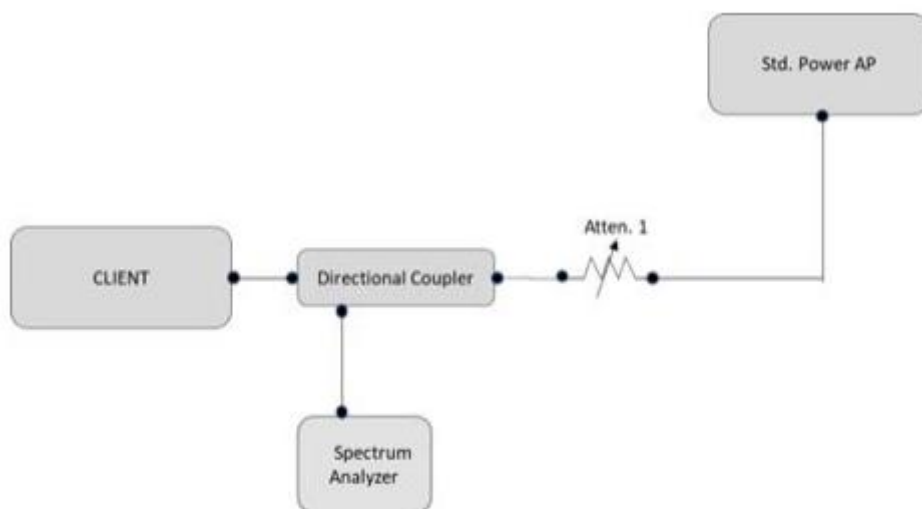


Figure 7. Test setup for conducted testing

3.5.5 Test Result Summary

Companion Standard Power AP: Brand name: Qualcomm, Model name: Wakiki

802.11be 20MHz bandwidth


Test channel 165

	Client Conducted Power (dBm)			Client EIRP (dBm)	AP EIRP (dBm)	AP to client EIRP Delta (dB)
	Ant6	Ant7	MIMO			
Maximum EIRP	12.41	12.34	15.39	16.40	35.0	18.60
Midpoint EIRP	0.60	0.50	3.56	4.57	25.0	20.43
Lowest EIRP	-3.61	-3.39	-0.49	0.52	21.1	20.58
Requirement						At least 6 dB
Result						Pass

Note: Client EIRP = Client MIMO conducted power + antenna gain (1.01dBi)




3.5.6 Test Result Plot

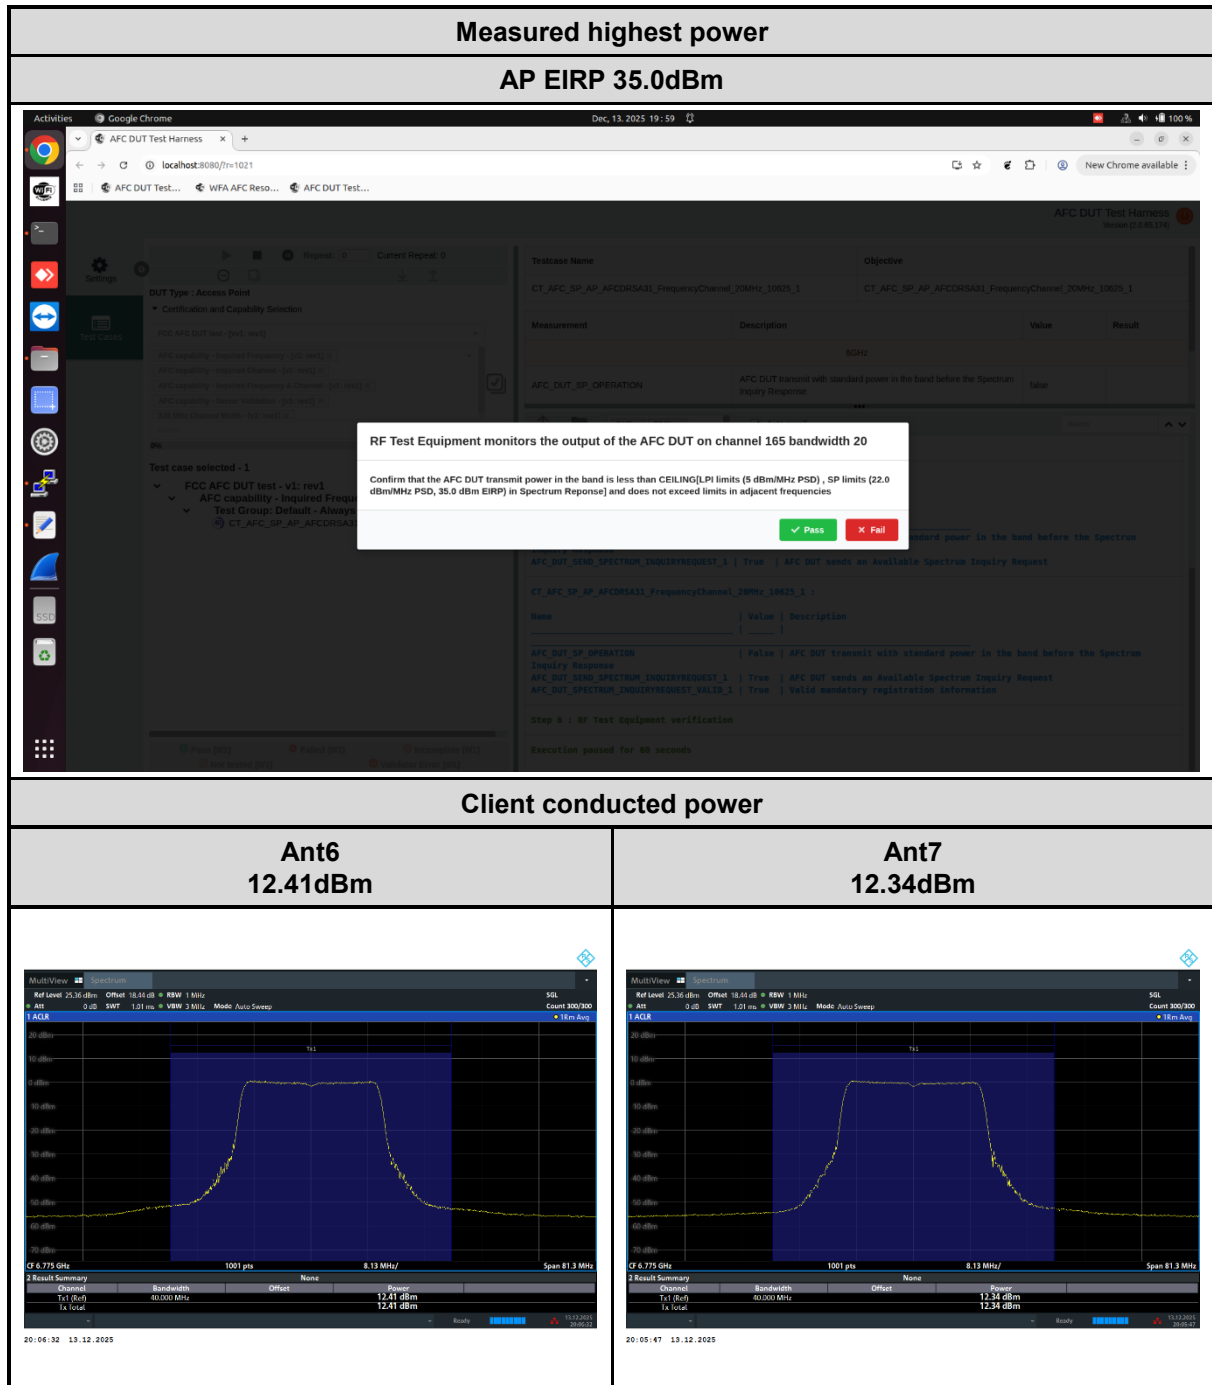





Measured mid-point power

AP EIRP 25.0dBm

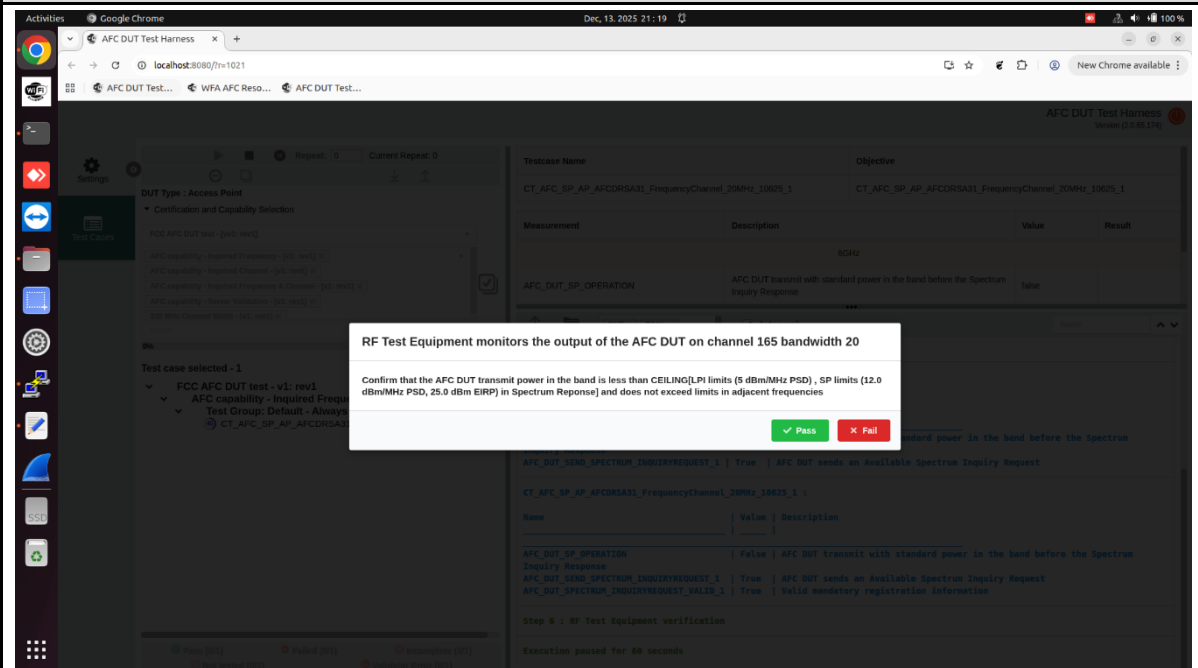

Client conducted power

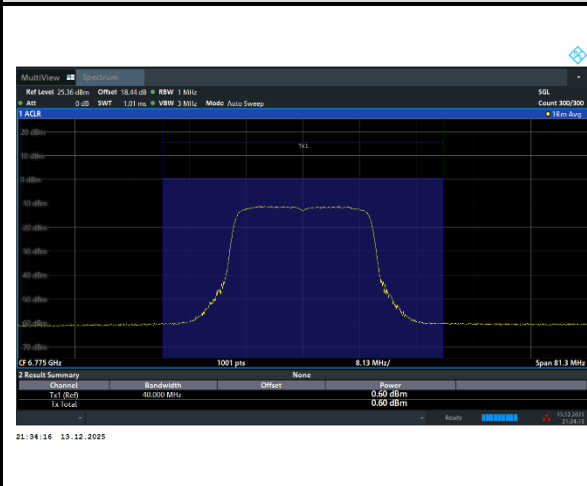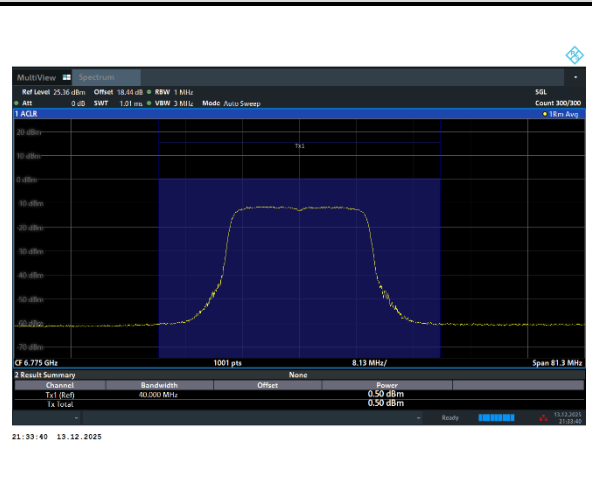Ant6
0.60dBmAnt7
0.50dBm



3.6 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

3.6.1 Limit of Proper Power Adjustment

15.407 KDB 987594 D02 Section II. K. Power limits for standard client devices

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP.

3.6.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03.

Section K. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

3.6.3 Test Procedure:

1. Connect equipment as shown in Figure 6 below..
2. Adjust Atten 2 to Std Power AP so as to facilitate error free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP)
3. Configure the Client and APs so that they associate and start sending data (stream data). It is important that the client is configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std Power AP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Gradually increase Atten 2 while at the same time decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation the Client should associate with the Low Power indoor AP.
6. Verify transmission between Client and Low Power AP.
7. Measure the RF power of the Client device using the same method as in step 4. Verify the power is no more than 24 dBm EIRP

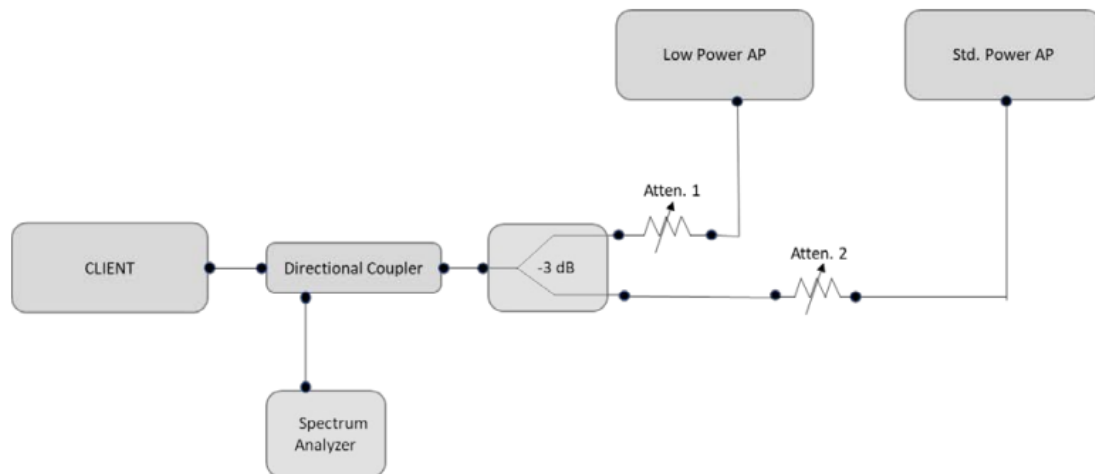


Figure 6. Test setup for conducted testing

3.6.4 Test Result Summary

Companion Standard Power AP: Brand name:Qualcomm, Model name:Wakiki


Companion Low Power indoor AP: Brand name: ASUS, Model name: RT-BE92U

802.11be 20MHz bandwidth

Test channel 165

	Client Conducted Power (dBm)			Client EIRP (dBm)	Limit EIRP (dBm)	Result
	Ant6	Ant7	MIMO			
Indoor EIRP	5.24	4.37	7.84	8.85	24	Pass
Standard EIRP	12.37	12.02	15.21	16.22	30	Pass

Note: Client EIRP = Client MIMO conducted power + antenna gain (1.01dBi)



3.7 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.7.2 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v03 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.7.3 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.7.4 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“..

3.7.5 Test Setup


For radiated emissions below 30MHz

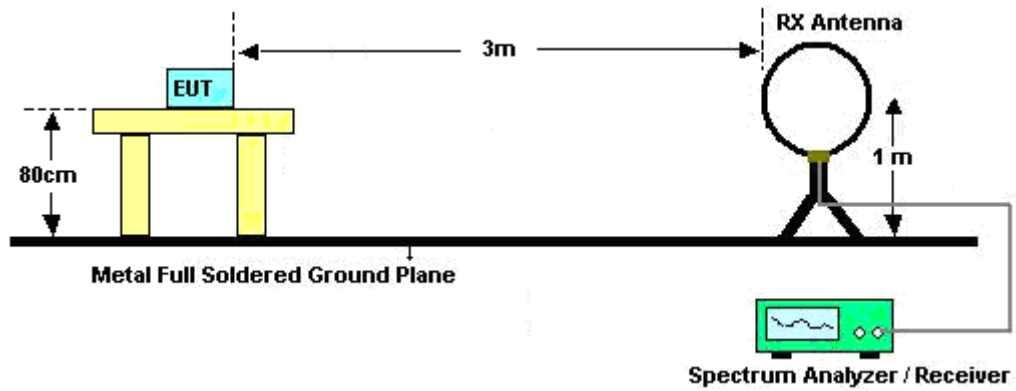


For radiated emissions from 30MHz to 1GHz

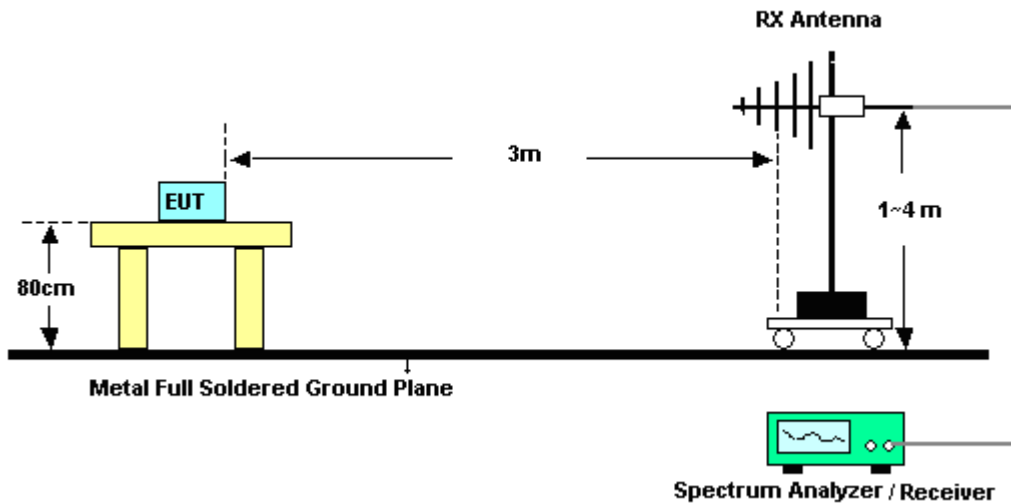

For radiated test from 1GHz to 18GHz

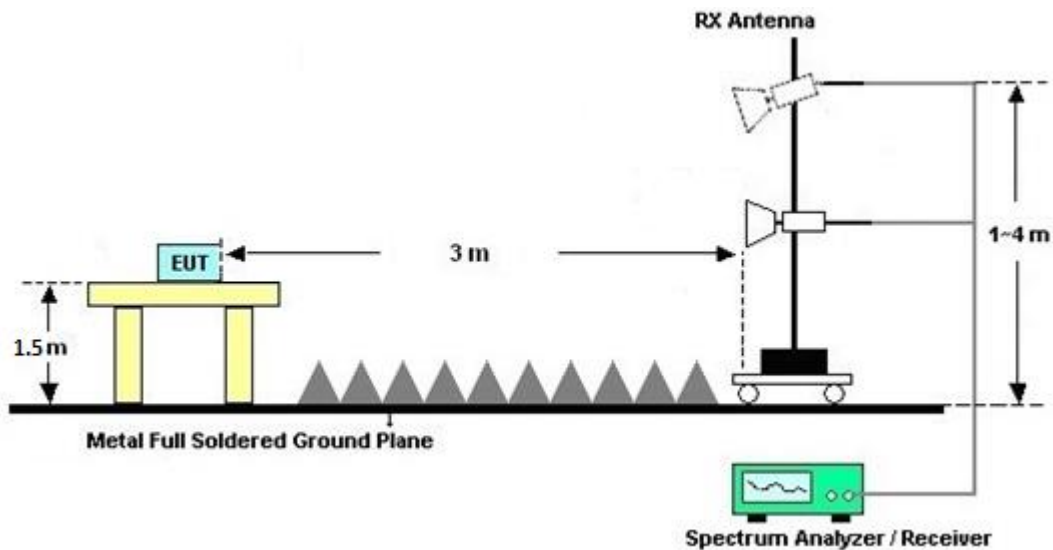

For radiated test above 18GHz

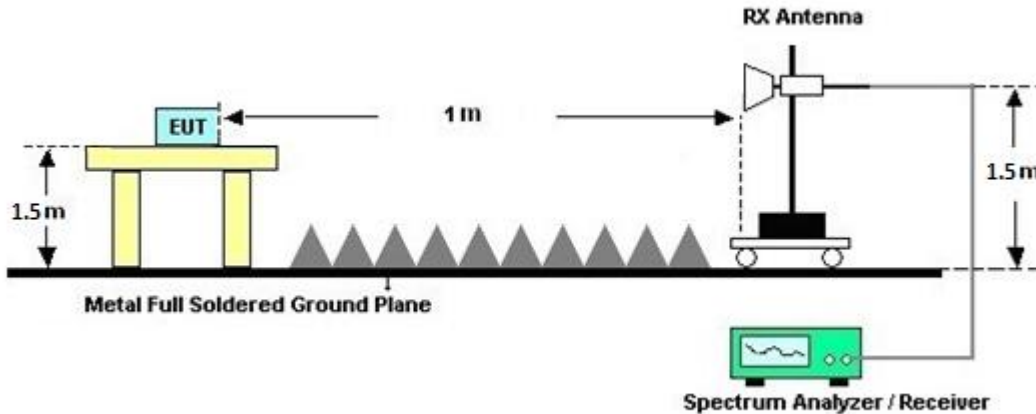

3.7.6 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.7.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.7.8 Duty Cycle

Please refer to Appendix D.

3.7.9 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.8.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

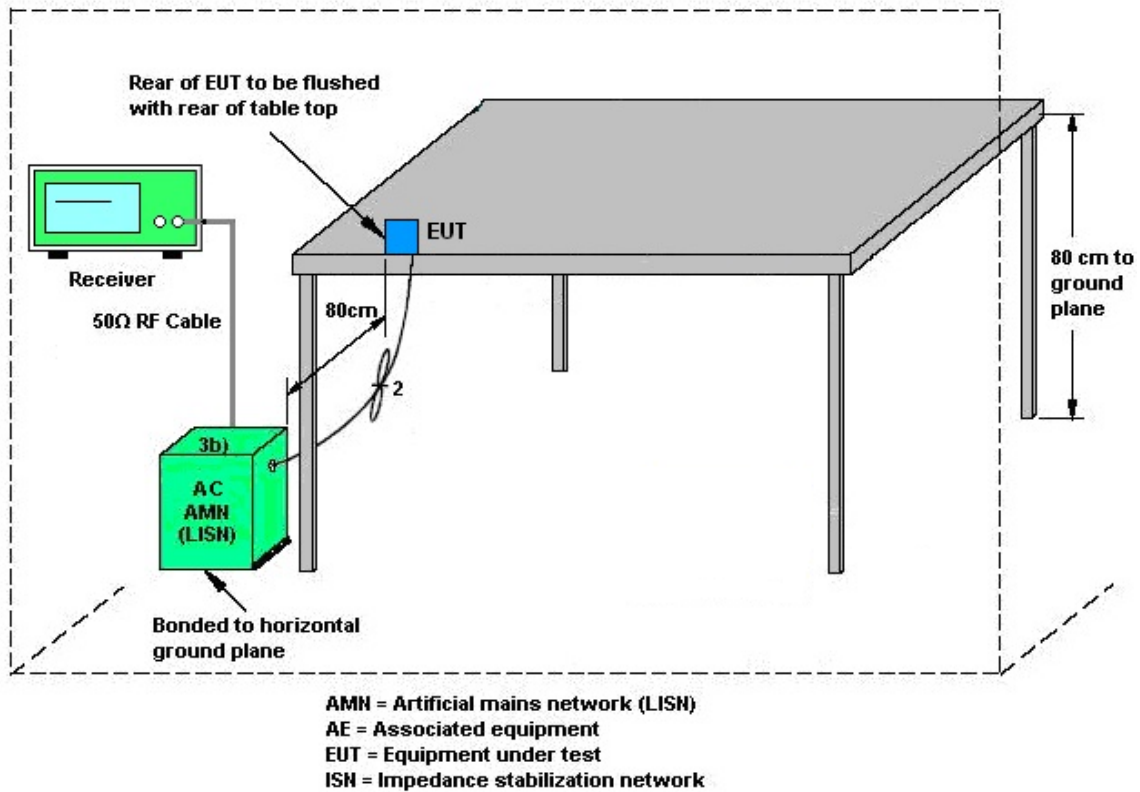

3.8.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.9 Antenna Requirements

3.9.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPIL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 16. 2025~ Feb. 11. 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-230100 13 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Dec. 16. 2025~ Feb. 11. 2026	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 16. 2025~ Feb. 11. 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX6)	N/A	Jul. 02, 2025	Dec. 16. 2025~ Feb. 11. 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ver sion_240513	N/A	Conducted Other Test Item	N/A	Dec. 16. 2025~ Feb. 11. 2026	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 18, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 18, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2025	Dec. 18, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Dec. 18, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Dec. 18, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Dec. 18, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Dec. 18, 2025	Feb. 12, 2026	Conduction (CO07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 20,2025	Dec. 12, 2025	Jan. 19,2026	APC (DF02-HY)
Coupler	MVE	MVE4816	A800044	0.5-18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10003	0.5GHz-6GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10007	0.5GHz-6GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
Power Divider	MVE	MVE8546	A700458	0.5GHz-6GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EM	SFL402	30cm-#6	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-01	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-09	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-01	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-03	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-05	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-10	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-11	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	150cm-#11	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	150cm-#15	30 kHz~18GHz	Calibration from System	Dec. 12, 2025	Calibration from System	APC (DF02-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	KV2D06A18ES	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Jul. 01, 2026	Radiation (03CH17-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 25, 2026	Radiation (03CH17-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Dec. 10, 2026	Radiation (03CH17-HY)
Amplifier	EMCI	EMC118A45SE	980791	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 25, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Aug. 24, 2026	Radiation (03CH17-HY)
Amplifier	SONOMA	310N	432035	9kHz ~ 1GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
EXA Signal Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 06, 2026	Radiation (03CH17-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 15, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 14, 2026	Radiation (03CH17-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/EMC101Y-K M-KM-1000/EMC 101Y-KM-KM-9000	04613/2,240904,240915	30MHz~40GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Mar. 30, 2026	Radiation (03CH17-HY)
Software	Audix	E3	RK-002469	N/A	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.1 dB
--	--------

Appendix A. Test Result of Conducted Test Items

<CDD mode>

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/12/16~2026/02/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	001	5955	18.08	17.84	32.62	33.54	320.00	Pass
11a	6Mbps	2	049	6195	17.47	17.11	24.10	23.53	320.00	Pass
11a	6Mbps	2	093	6415	17.52	17.14	24.02	23.28	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7			
11a	6Mbps	2	001	5955	19.17	19.86	22.54	0.87		23.41	30.00	Pass
11a	6Mbps	2	049	6195	19.88	19.92	22.91	0.87		23.78	30.00	Pass
11a	6Mbps	2	093	6415	19.33	19.66	22.51	0.87		23.38	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	001	5955	0.03	0.03			10.55	2.97	13.52	17.00	Pass	
11a	6Mbps	2	049	6195	0.03	0.03			10.70	2.97	13.66	17.00	Pass	
11a	6Mbps	2	093	6415	0.03	0.03			10.52	2.97	13.49	17.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	117	6535	17.69	17.19	31.18	23.50	320.00	Pass
11a	6Mbps	2	149	6695	17.53	17.12	24.09	23.08	320.00	Pass
11a	6Mbps	2	181	6855	17.37	17.06	23.79	23.09	320.00	Pass

U-NII-7 straddle channel MIMO										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	185	6875	17.58	17.16	24.78	23.38	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7			
11a	6Mbps	2	117	6535	19.56	19.55	22.57	1.01		23.58	30.00	Pass
11a	6Mbps	2	149	6695	19.15	19.67	22.43	1.01		23.44	30.00	Pass
11a	6Mbps	2	181	6855	19.25	19.47	22.37	1.01		23.38	30.00	Pass

U-NII-7 straddle channel MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	185	6875	19.67	19.76	22.73	1.01		23.74	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	117	6535	0.03	0.03			10.37	3.02	13.39	17.00	Pass	
11a	6Mbps	2	149	6695	0.03	0.03			10.30	3.02	13.32	17.00	Pass	
11a	6Mbps	2	181	6855	0.03	0.03			10.46	3.02	13.48	17.00	Pass	

FCC U-NII-7 straddle channel MIMO														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
11a	6Mbps	2	185	6875	0.03	0.03				10.68	3.02	13.70	17.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	001	5955	Full	18.78	19.18	21.99	0.87		22.86	30.00	Pass
HE20	MCS0	2	001	5955	26/0	8.93	9.24	12.10	0.87		12.97	30.00	Pass
HE20	MCS0	2	001	5955	52/37	11.81	12.19	15.01	0.87		15.88	30.00	Pass
HE20	MCS0	2	001	5955	106/53	14.69	14.96	17.84	0.87		18.71	30.00	Pass
HE20	MCS0	2	049	6195	Full	18.72	18.95	21.85	0.87		22.72	30.00	Pass
HE20	MCS0	2	049	6195	26/4	9.97	9.57	12.78	0.87		13.65	30.00	Pass
HE20	MCS0	2	049	6195	52/38	11.79	11.24	14.53	0.87		15.40	30.00	Pass
HE20	MCS0	2	049	6195	106/53	14.67	14.11	17.41	0.87		18.28	30.00	Pass
HE20	MCS0	2	093	6415	Full	18.57	19.26	21.94	0.87		22.81	30.00	Pass
HE20	MCS0	2	093	6415	26/8	8.76	8.53	11.66	0.87		12.53	30.00	Pass
HE20	MCS0	2	093	6415	52/40	11.85	11.84	14.86	0.87		15.73	30.00	Pass
HE20	MCS0	2	093	6415	106/54	14.61	14.79	17.71	0.87		18.58	30.00	Pass
HE40	MCS0	2	003	5965	Full	18.87	19.07	21.98	0.87		22.85	30.00	Pass
HE40	MCS0	2	003	5965	242/61	15.91	16.33	19.14	0.87		20.01	30.00	Pass
HE40	MCS0	2	051	6205	Full	18.79	19.03	21.92	0.87		22.79	30.00	Pass
HE40	MCS0	2	051	6205	242/61	15.78	15.84	18.82	0.87		19.69	30.00	Pass
HE40	MCS0	2	091	6405	Full	18.66	19.38	22.05	0.87		22.92	30.00	Pass
HE40	MCS0	2	091	6405	242/62	16.07	16.52	19.31	0.87		20.18	30.00	Pass
HE80	MCS0	2	007	5985	Full	18.85	19.27	22.08	0.87		22.95	30.00	Pass
HE80	MCS0	2	007	5985	484/65	15.86	16.13	19.01	0.87		19.88	30.00	Pass
HE80	MCS0	2	055	6225	Full	18.73	19.03	21.89	0.87		22.76	30.00	Pass
HE80	MCS0	2	055	6225	484/65	15.78	15.86	18.83	0.87		19.70	30.00	Pass
HE80	MCS0	2	087	6385	Full	18.76	19.03	21.91	0.87		22.78	30.00	Pass
HE80	MCS0	2	087	6385	484/66	15.74	15.91	18.84	0.87		19.71	30.00	Pass
HE160	MCS0	2	015	6025	Full	17.97	18.76	21.39	0.87		22.26	30.00	Pass
HE160	MCS0	2	015	6025	996/67	15.51	15.89	18.71	0.87		19.58	30.00	Pass
HE160	MCS0	2	047	6185	Full	18.52	18.72	21.63	0.87		22.50	30.00	Pass
HE160	MCS0	2	047	6185	996/67	15.91	15.96	18.95	0.87		19.82	30.00	Pass
HE160	MCS0	2	079	6345	Full	18.41	18.95	21.70	0.87		22.57	30.00	Pass
HE160	MCS0	2	079	6345	996/S67	15.29	15.53	18.42	0.87		19.29	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	001	5955	Full	0.02	0.02		9.14	2.97		12.11	17.00	Pass	
HE20	MCS0	2	001	5955	26/0	0.00	0.00		8.81	2.97		11.78	17.00	Pass	
HE20	MCS0	2	001	5955	52/37	0.00	0.00		8.98	2.97		11.95	17.00	Pass	
HE20	MCS0	2	001	5955	106/53	0.03	0.03		8.88	2.97		11.85	17.00	Pass	
HE20	MCS0	2	049	6195	Full	0.02	0.02		8.86	2.97		11.83	17.00	Pass	
HE20	MCS0	2	049	6195	26/4	0.00	0.00		8.44	2.97		11.41	17.00	Pass	
HE20	MCS0	2	049	6195	52/38	0.00	0.00		8.30	2.97		11.26	17.00	Pass	
HE20	MCS0	2	049	6195	106/53	0.03	0.03		8.22	2.97		11.18	17.00	Pass	
HE20	MCS0	2	093	6415	Full	0.02	0.02		9.12	2.97		12.09	17.00	Pass	
HE20	MCS0	2	093	6415	26/8	0.00	0.00		8.76	2.97		11.72	17.00	Pass	
HE20	MCS0	2	093	6415	52/40	0.00	0.00		8.86	2.97		11.83	17.00	Pass	
HE20	MCS0	2	093	6415	106/54	0.03	0.03		8.72	2.97		11.69	17.00	Pass	
HE40	MCS0	2	003	5965	Full	0.00	0.00		6.45	2.97		9.42	17.00	Pass	
HE40	MCS0	2	003	5965	242/61	0.00	0.00		6.06	2.97		9.03	17.00	Pass	
HE40	MCS0	2	051	6205	Full	0.00	0.00		6.28	2.97		9.25	17.00	Pass	
HE40	MCS0	2	051	6205	242/61	0.00	0.00		6.20	2.97		9.17	17.00	Pass	
HE40	MCS0	2	091	6405	Full	0.00	0.00		6.50	2.97		9.47	17.00	Pass	
HE40	MCS0	2	091	6405	242/62	0.00	0.00		6.29	2.97		9.25	17.00	Pass	
HE80	MCS0	2	007	5985	Full	0.00	0.00		3.50	2.97		6.47	17.00	Pass	
HE80	MCS0	2	007	5985	484/65	0.06	0.06		3.42	2.97		6.39	17.00	Pass	
HE80	MCS0	2	055	6225	Full	0.00	0.00	3.74	2.97		6.70	17.00	Pass		
HE80	MCS0	2	055	6225	484/65	0.06	0.06	3.18	2.97		6.15	17.00	Pass		
HE80	MCS0	2	087	6385	Full	0.00	0.00	3.75	2.97		6.71	17.00	Pass		
HE80	MCS0	2	087	6385	484/66	0.06	0.06	3.41	2.97		6.38	17.00	Pass		
HE160	MCS0	2	015	6025	Full	0.02	0.02	0.63	2.97		3.60	17.00	Pass		
HE160	MCS0	2	015	6025	996/67	0.10	0.09	0.59	2.97		3.56	17.00	Pass		
HE160	MCS0	2	047	6185	Full	0.02	0.02	0.78	2.97		3.75	17.00	Pass		
HE160	MCS0	2	047	6185	996/67	0.10	0.09	0.28	2.97		3.25	17.00	Pass		
HE160	MCS0	2	079	6345	Full	0.02	0.02	0.89	2.97		3.86	17.00	Pass		
HE160	MCS0	2	079	6345	996/S67	0.10	0.09	0.57	2.97		3.54	17.00	Pass		

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
HE20	MCS0	2	117	6535	Full	18.93	18.94	21.95	1.01		22.96	30.00	Pass
HE20	MCS0	2	117	6535	26/0	9.77	8.45	12.17	1.01		13.18	30.00	Pass
HE20	MCS0	2	117	6535	52/37	12.46	11.58	15.05	1.01		16.06	30.00	Pass
HE20	MCS0	2	117	6535	106/53	15.07	14.49	17.80	1.01		18.81	30.00	Pass
HE20	MCS0	2	149	6695	Full	18.72	19.12	21.93	1.01		22.94	30.00	Pass
HE20	MCS0	2	149	6695	26/4	9.96	9.93	12.96	1.01		13.97	30.00	Pass
HE20	MCS0	2	149	6695	52/38	12.28	12.04	15.17	1.01		16.18	30.00	Pass
HE20	MCS0	2	149	6695	106/53	14.79	14.74	17.78	1.01		18.79	30.00	Pass
HE20	MCS0	2	181	6855	Full	18.89	18.99	21.95	1.01		22.96	30.00	Pass
HE20	MCS0	2	181	6855	26/8	9.49	8.74	12.14	1.01		13.15	30.00	Pass
HE20	MCS0	2	181	6855	52/40	12.11	11.44	14.80	1.01		15.81	30.00	Pass
HE20	MCS0	2	181	6855	106/54	14.86	14.81	17.85	1.01		18.86	30.00	Pass
HE40	MCS0	2	123	6565	Full	18.83	18.73	21.79	1.01		22.80	30.00	Pass
HE40	MCS0	2	123	6565	242/61	16.27	15.64	18.98	1.01		19.99	30.00	Pass
HE40	MCS0	2	147	6685	Full	18.59	19.09	21.86	1.01		22.87	30.00	Pass
HE40	MCS0	2	147	6685	242/61	15.54	15.86	18.71	1.01		19.72	30.00	Pass
HE40	MCS0	2	179	6845	Full	19.16	18.98	22.08	1.01		23.09	30.00	Pass
HE40	MCS0	2	179	6845	242/62	16.08	15.73	18.92	1.01		19.93	30.00	Pass
HE80	MCS0	2	135	6625	Full	18.97	18.91	21.95	1.01		22.96	30.00	Pass
HE80	MCS0	2	135	6625	484/65	15.65	15.65	18.66	1.01		19.67	30.00	Pass
HE80	MCS0	2	151	6705	Full	19.13	19.09	22.12	1.01		23.13	30.00	Pass
HE80	MCS0	2	151	6705	484/65	15.91	16.09	19.01	1.01		20.02	30.00	Pass
HE80	MCS0	2	167	6785	Full	19.12	18.87	22.01	1.01		23.02	30.00	Pass
HE80	MCS0	2	167	6785	484/66	15.48	15.23	18.37	1.01		19.38	30.00	Pass
HE160	MCS0	2	143	6665	Full	18.01	18.52	21.28	1.01		22.29	30.00	Pass
HE160	MCS0	2	143	6665	996/S67	14.93	14.94	17.95	1.01		18.96	30.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
HE20	MCS0	2	185	6875	Full	19.23	19.17	22.21	1.01		23.22	30.00	Pass
HE20	MCS0	2	185	6875	26/8	9.62	8.86	12.27	1.01		13.28	30.00	Pass
HE20	MCS0	2	185	6875	52/40	12.28	11.48	14.91	1.01		15.92	30.00	Pass
HE20	MCS0	2	185	6875	106/54	15.27	15.23	18.26	1.01		19.27	30.00	Pass
HE40	MCS0	2	187	6885	Full	19.05	18.89	21.98	1.01		22.99	30.00	Pass
HE40	MCS0	2	187	6885	242/62	15.66	15.41	18.55	1.01		19.56	30.00	Pass
HE80	MCS0	2	183	6865	Full	19.38	19.22	22.31	1.01		23.32	30.00	Pass
HE80	MCS0	2	183	6865	484/66	15.91	15.76	18.85	1.01		19.86	30.00	Pass
HE160	MCS0	2	175	6825	Full	18.64	18.53	21.60	1.01		22.61	30.00	Pass
HE160	MCS0	2	175	6825	996/67	15.99	15.34	18.69	1.01		19.70	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	117	6535	Full	0.02	0.02			9.11	3.02	12.12	17.00	Pass	
HE20	MCS0	2	117	6535	26/0	0.00	0.00			8.95	3.02	11.97	17.00	Pass	
HE20	MCS0	2	117	6535	52/37	0.00	0.00			9.02	3.02	12.04	17.00	Pass	
HE20	MCS0	2	117	6535	106/53	0.03	0.03			8.83	3.02	11.85	17.00	Pass	
HE20	MCS0	2	149	6695	Full	0.02	0.02			9.08	3.02	12.09	17.00	Pass	
HE20	MCS0	2	149	6695	26/4	0.00	0.00			8.65	3.02	11.67	17.00	Pass	
HE20	MCS0	2	149	6695	52/38	0.00	0.00			9.03	3.02	12.04	17.00	Pass	
HE20	MCS0	2	149	6695	106/53	0.03	0.03			8.78	3.02	11.80	17.00	Pass	
HE20	MCS0	2	181	6855	Full	0.02	0.02			9.05	3.02	12.06	17.00	Pass	
HE20	MCS0	2	181	6855	26/8	0.00	0.00			9.04	3.02	12.05	17.00	Pass	
HE20	MCS0	2	181	6855	52/40	0.00	0.00			8.80	3.02	11.82	17.00	Pass	
HE20	MCS0	2	181	6855	106/54	0.03	0.03			8.78	3.02	11.79	17.00	Pass	
HE40	MCS0	2	123	6565	Full	0.00	0.00			6.43	3.02	9.45	17.00	Pass	
HE40	MCS0	2	123	6565	242/61	0.00	0.00			6.18	3.02	9.20	17.00	Pass	
HE40	MCS0	2	147	6685	Full	0.00	0.00			6.40	3.02	9.42	17.00	Pass	
HE40	MCS0	2	147	6685	242/61	0.00	0.00			6.16	3.02	9.18	17.00	Pass	
HE40	MCS0	2	179	6845	Full	0.00	0.00		6.49	3.02	9.51	17.00	Pass		
HE40	MCS0	2	179	6845	242/62	0.00	0.00		5.96	3.02	8.97	17.00	Pass		
HE80	MCS0	2	135	6625	Full	0.00	0.00		3.77	3.02	6.78	17.00	Pass		
HE80	MCS0	2	135	6625	484/65	0.06	0.06		3.43	3.02	6.45	17.00	Pass		
HE80	MCS0	2	151	6705	Full	0.00	0.00		3.97	3.02	6.99	17.00	Pass		
HE80	MCS0	2	151	6705	484/65	0.06	0.06		3.48	3.02	6.50	17.00	Pass		
HE80	MCS0	2	167	6785	Full	0.00	0.00		3.72	3.02	6.74	17.00	Pass		
HE80	MCS0	2	167	6785	484/66	0.06	0.06		3.28	3.02	6.29	17.00	Pass		
HE160	MCS0	2	143	6665	Full	0.02	0.02		0.45	3.02	3.47	17.00	Pass		
HE160	MCS0	2	143	6665	996/S67	0.10	0.09		0.42	3.02	3.44	17.00	Pass		

U-NII-7 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
HE20	MCS0	2	185	6875	Full	0.02	0.02	Ant 6	Ant 7	9.25	3.02	12.27	17.00	Pass	
HE20	MCS0	2	185	6875	26/8	0.00	0.00			9.19	3.02	12.21	17.00	Pass	
HE20	MCS0	2	185	6875	52/40	0.00	0.00			8.80	3.02	11.81	17.00	Pass	
HE20	MCS0	2	185	6875	106/54	0.03	0.03			9.11	3.02	12.13	17.00	Pass	
HE40	MCS0	2	187	6885	Full	0.00	0.00			6.18	3.02	9.19	17.00	Pass	
HE40	MCS0	2	187	6885	242/62	0.00	0.00			5.73	3.02	8.75	17.00	Pass	
HE80	MCS0	2	183	6865	Full	0.00	0.00			4.14	3.02	7.16	17.00	Pass	
HE80	MCS0	2	183	6865	484/66	0.06	0.06			3.61	3.02	6.63	17.00	Pass	
HE160	MCS0	2	175	6825	Full	0.02	0.02			0.53	3.02	3.55	17.00	Pass	
HE160	MCS0	2	175	6825	996/67	0.10	0.09			0.34	3.02	3.36	17.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	001	5955	Full	19.21	19.21	23.34	23.59	320.00	Pass
EHT20	MCS0	2	049	6195	Full	19.22	19.23	23.89	24.00	320.00	Pass
EHT20	MCS0	2	093	6415	Full	19.23	19.21	24.08	24.04	320.00	Pass
EHT40	MCS0	2	003	5965	Full	38.37	38.37	45.86	45.30	320.00	Pass
EHT40	MCS0	2	051	6205	Full	38.12	38.18	45.25	44.74	320.00	Pass
EHT40	MCS0	2	091	6405	Full	38.42	38.30	50.58	45.12	320.00	Pass
EHT80	MCS0	2	007	5985	Full	77.86	77.80	90.69	89.38	320.00	Pass
EHT80	MCS0	2	055	6225	Full	77.85	77.79	91.10	90.85	320.00	Pass
EHT80	MCS0	2	087	6385	Full	77.67	77.73	91.49	89.54	320.00	Pass
EHT160	MCS0	2	015	6025	Full	156.82	156.87	172.94	173.90	320.00	Pass
EHT160	MCS0	2	047	6185	Full	156.75	156.99	174.00	174.38	320.00	Pass
EHT160	MCS0	2	079	6345	Full	156.90	156.90	172.80	172.85	320.00	Pass
EHT320	MCS0	2	031	6105	Full	317.44	317.06	348.67	347.04	320.00	Pass
EHT320	MCS0	2	063	6265	Full	317.44	316.96	349.25	345.79	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	001	5955	Full	18.85	19.25	22.06	0.87		22.93	30.00	Pass
EHT20	MCS0	2	001	5955	26/0	9.29	9.35	12.33	0.87		13.20	30.00	Pass
EHT20	MCS0	2	001	5955	52/37	12.16	12.23	15.21	0.87		16.08	30.00	Pass
EHT20	MCS0	2	001	5955	106/53	15.03	15.26	18.16	0.87		19.03	30.00	Pass
EHT20	MCS0	2	001	5955	52T+26T/70	13.96	14.09	17.04	0.87		17.91	30.00	Pass
EHT20	MCS0	2	001	5955	106T+26T/82	15.94	16.19	19.08	0.87		19.95	30.00	Pass
EHT20	MCS0	2	049	6195	Full	18.93	19.04	22.00	0.87		22.87	30.00	Pass
EHT20	MCS0	2	049	6195	26/4	10.28	9.88	13.09	0.87		13.96	30.00	Pass
EHT20	MCS0	2	049	6195	52/38	12.03	11.54	14.80	0.87		15.67	30.00	Pass
EHT20	MCS0	2	049	6195	106/53	14.78	14.42	17.61	0.87		18.48	30.00	Pass
EHT20	MCS0	2	093	6415	Full	18.71	19.28	22.01	0.87		22.88	30.00	Pass
EHT20	MCS0	2	093	6415	26/8	8.92	8.79	11.87	0.87		12.74	30.00	Pass
EHT20	MCS0	2	093	6415	52/40	12.03	11.96	15.01	0.87		15.88	30.00	Pass
EHT20	MCS0	2	093	6415	106/54	14.76	15.09	17.94	0.87		18.81	30.00	Pass
EHT40	MCS0	2	003	5965	Full	19.03	19.16	22.11	0.87		22.98	30.00	Pass
EHT40	MCS0	2	003	5965	242/61	16.03	16.41	19.23	0.87		20.10	30.00	Pass
EHT40	MCS0	2	051	6205	Full	18.84	19.24	22.05	0.87		22.92	30.00	Pass
EHT40	MCS0	2	051	6205	242/61	15.84	15.98	18.92	0.87		19.79	30.00	Pass
EHT40	MCS0	2	091	6405	Full	18.91	19.48	22.21	0.87		23.08	30.00	Pass
EHT40	MCS0	2	091	6405	242/62	16.16	16.81	19.51	0.87		20.38	30.00	Pass
EHT80	MCS0	2	007	5985	Full	18.91	19.39	22.17	0.87		23.04	30.00	Pass
EHT80	MCS0	2	007	5985	484/65	15.91	16.27	19.10	0.87		19.97	30.00	Pass
EHT80	MCS0	2	007	5985	Puncture 20/4	17.99	18.66	21.35	0.87		22.22	30.00	Pass
EHT80	MCS0	2	055	6225	Full	18.87	19.27	22.08	0.87		22.95	30.00	Pass
EHT80	MCS0	2	055	6225	484/65	15.93	15.94	18.95	0.87		19.82	30.00	Pass
EHT80	MCS0	2	055	6225	Puncture 20/1	17.63	18.17	20.92	0.87		21.79	30.00	Pass
EHT80	MCS0	2	087	6385	Full	18.85	19.14	22.01	0.87		22.88	30.00	Pass
EHT80	MCS0	2	087	6385	484/66	15.87	16.03	18.96	0.87		19.83	30.00	Pass
EHT80	MCS0	2	087	6385	Puncture 20/1	17.77	18.08	20.94	0.87		21.81	30.00	Pass
EHT160	MCS0	2	015	6025	Full	18.18	18.91	21.57	0.87		22.44	30.00	Pass
EHT160	MCS0	2	015	6025	996/67	15.76	16.09	18.94	0.87		19.81	30.00	Pass
EHT160	MCS0	2	015	6025	Puncture20/8	17.93	18.49	21.23	0.87		22.10	30.00	Pass
EHT160	MCS0	2	015	6025	Puncture40/4	17.52	18.18	20.87	0.87		21.74	30.00	Pass
EHT160	MCS0	2	047	6185	Full	18.65	18.93	21.80	0.87		22.67	30.00	Pass
EHT160	MCS0	2	047	6185	996/67	16.29	16.33	19.32	0.87		20.19	30.00	Pass
EHT160	MCS0	2	047	6185	Puncture20/8	18.52	18.68	21.61	0.87		22.48	30.00	Pass
EHT160	MCS0	2	047	6185	Puncture40/4	17.72	17.94	20.84	0.87		21.71	30.00	Pass
EHT160	MCS0	2	079	6345	Full	18.54	19.06	21.82	0.87		22.69	30.00	Pass
EHT160	MCS0	2	079	6345	996/S67	15.78	15.71	18.76	0.87		19.63	30.00	Pass
EHT160	MCS0	2	079	6105	Puncture20/1	18.07	18.31	21.20	0.87		22.07	30.00	Pass
EHT160	MCS0	2	079	6105	Puncture40/1	17.91	18.06	21.00	0.87		21.87	30.00	Pass
EHT320	MCS0	2	031	6105	Full	17.84	17.75	20.81	0.87		21.68	30.00	Pass
EHT320	MCS0	2	031	6105	996*4/69	15.65	15.46	18.57	0.87		19.44	30.00	Pass
EHT320	MCS0	2	031	6105	Puncture 40/8	17.44	17.38	20.42	0.87		21.29	30.00	Pass
EHT320	MCS0	2	031	6105	Puncture 80/4	17.02	16.98	20.01	0.87		20.88	30.00	Pass
EHT320	MCS0	2	031	6105	Puncture 80+40/6	16.61	16.41	19.52	0.87		20.39	30.00	Pass
EHT320	MCS0	2	063	6265	Full	17.79	17.99	20.90	0.87		21.77	30.00	Pass
EHT320	MCS0	2	063	6265	996*4/69	15.11	15.24	18.19	0.87		19.06	30.00	Pass
EHT320	MCS0	2	063	6265	Puncture 40/8	17.41	17.76	20.60	0.87		21.47	30.00	Pass
EHT320	MCS0	2	063	6265	Puncture 80/4	17.03	17.34	20.20	0.87		21.07	30.00	Pass
EHT320	MCS0	2	063	6265	Puncture 80+40/6	16.41	16.82	19.63	0.87		20.50	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	001	5955	Full	0.00	0.00		9.24	2.97	12.21	17.00	Pass		
EHT20	MCS0	2	001	5955	26/0	0.00	0.00		9.02	2.97	11.99	17.00	Pass		
EHT20	MCS0	2	001	5955	52/37	0.00	0.00		9.06	2.97	12.03	17.00	Pass		
EHT20	MCS0	2	001	5955	106/53	0.02	0.02		9.06	2.97	12.03	17.00	Pass		
EHT20	MCS0	2	001	5955	52T+26T/70	0.66	0.66		9.04	2.97	12.00	17.00	Pass		
EHT20	MCS0	2	001	5955	106T+26T/82	0.66	0.66		9.04	2.97	12.01	17.00	Pass		
EHT20	MCS0	2	049	6195	Full	0.00	0.00		8.88	2.97	11.85	17.00	Pass		
EHT20	MCS0	2	049	6195	26/4	0.00	0.00		8.49	2.97	11.46	17.00	Pass		
EHT20	MCS0	2	049	6195	52/38	0.00	0.00		8.35	2.97	11.32	17.00	Pass		
EHT20	MCS0	2	049	6195	106/53	0.02	0.02		8.38	2.97	11.35	17.00	Pass		
EHT20	MCS0	2	093	6415	Full	0.00	0.00		9.21	2.97	12.18	17.00	Pass		
EHT20	MCS0	2	093	6415	26/8	0.00	0.00		8.72	2.97	11.68	17.00	Pass		
EHT20	MCS0	2	093	6415	52/40	0.00	0.00		9.04	2.97	12.01	17.00	Pass		
EHT20	MCS0	2	093	6415	106/54	0.02	0.02		8.86	2.97	11.82	17.00	Pass		
EHT40	MCS0	2	003	5965	Full	0.00	0.00		6.87	2.97	9.84	17.00	Pass		
EHT40	MCS0	2	003	5965	242/61	0.00	0.00		6.70	2.97	9.67	17.00	Pass		
EHT40	MCS0	2	051	6205	Full	0.00	0.00		6.69	2.97	9.66	17.00	Pass		
EHT40	MCS0	2	051	6205	242/61	0.00	0.00		6.19	2.97	9.16	17.00	Pass		
EHT40	MCS0	2	091	6405	Full	0.00	0.00		6.95	2.97	9.92	17.00	Pass		
EHT40	MCS0	2	091	6405	242/62	0.00	0.00		6.86	2.97	9.83	17.00	Pass		
EHT80	MCS0	2	007	5985	Full	0.00	0.00		4.03	2.97	7.00	17.00	Pass		
EHT80	MCS0	2	007	5985	484/65	0.06	0.06		3.62	2.97	6.59	17.00	Pass		
EHT80	MCS0	2	007	5985	Puncture 20/4	0.68	0.68		4.02	2.97	6.99	17.00	Pass		
EHT80	MCS0	2	055	6225	Full	0.00	0.00		3.75	2.97	6.72	17.00	Pass		
EHT80	MCS0	2	055	6225	484/65	0.06	0.06		3.18	2.97	6.15	17.00	Pass		
EHT80	MCS0	2	055	6225	Puncture 20/1	0.68	0.68		3.65	2.97	6.62	17.00	Pass		
EHT80	MCS0	2	087	6385	Full	0.00	0.00		3.79	2.97	6.76	17.00	Pass		
EHT80	MCS0	2	087	6385	484/66	0.06	0.06		3.24	2.97	6.21	17.00	Pass		
EHT80	MCS0	2	087	6385	Puncture 20/1	0.68	0.68		3.64	2.97	6.60	17.00	Pass		
EHT160	MCS0	2	015	6025	Full	0.02	0.02		0.87	2.97	3.84	17.00	Pass		
EHT160	MCS0	2	015	6025	996/67	0.09	0.09		0.41	2.97	3.38	17.00	Pass		
EHT160	MCS0	2	015	6025	Puncture20/8	0.02	0.01		0.37	2.97	3.34	17.00	Pass		
EHT160	MCS0	2	015	6025	Puncture40/4	0.68	0.68		0.57	2.97	3.54	17.00	Pass		
EHT160	MCS0	2	047	6185	Full	0.02	0.02		0.82	2.97	3.79	17.00	Pass		
EHT160	MCS0	2	047	6185	996/67	0.09	0.09		0.67	2.97	3.64	17.00	Pass		
EHT160	MCS0	2	047	6185	Puncture20/8	0.02	0.01		0.69	2.97	3.66	17.00	Pass		
EHT160	MCS0	2	047	6185	Puncture40/4	0.68	0.68		0.39	2.97	3.36	17.00	Pass		
EHT160	MCS0	2	079	6345	Full	0.02	0.02		0.97	2.97	3.94	17.00	Pass		
EHT160	MCS0	2	079	6345	996/S67	0.09	0.09		0.87	2.97	3.84	17.00	Pass		
EHT160	MCS0	2	079	6105	Puncture20/1	0.02	0.01		0.53	2.97	3.50	17.00	Pass		
EHT160	MCS0	2	079	6105	Puncture40/1	0.68	0.68	0.95	2.97	3.92	17.00	Pass			
EHT320	MCS0	2	031	6105	Full	0.02	0.02	-3.18	2.97	-0.21	17.00	Pass			
EHT320	MCS0	2	031	6105	996*4/69	0.12	0.11	-3.19	2.97	-0.22	17.00	Pass			
EHT320	MCS0	2	031	6105	Puncture 40/8	0.68	0.67	-3.33	2.97	-0.36	17.00	Pass			
EHT320	MCS0	2	031	6105	Puncture 80/4	0.67	0.68	-3.50	2.97	-0.53	17.00	Pass			
EHT320	MCS0	2	031	6105	Puncture 80+40/6	0.67	0.67	-3.26	2.97	-0.29	17.00	Pass			
EHT320	MCS0	2	063	6265	Full	0.02	0.02	-3.09	2.97	-0.12	17.00	Pass			
EHT320	MCS0	2	063	6265	996*4/69	0.12	0.11	-3.62	2.97	-0.65	17.00	Pass			
EHT320	MCS0	2	063	6265	Puncture 40/8	0.12	0.11	-3.30	2.97	-0.33	17.00	Pass			
EHT320	MCS0	2	063	6265	Puncture 80/4	0.12	0.11	-3.28	2.97	-0.31	17.00	Pass			
EHT320	MCS0	2	063	6265	Puncture 80+40/6	0.12	0.11	-3.26	2.97	-0.30	17.00	Pass			

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	117	6535	Full	19.24	19.21	24.30	24.03	320.00	Pass
EHT20	MCS0	2	149	6695	Full	19.22	19.18	23.54	23.88	320.00	Pass
EHT20	MCS0	2	181	6855	Full	19.24	19.19	24.27	23.82	320.00	Pass
EHT40	MCS0	2	123	6565	Full	38.27	38.28	45.66	45.33	320.00	Pass
EHT40	MCS0	2	147	6685	Full	38.25	38.28	45.98	44.91	320.00	Pass
EHT40	MCS0	2	179	6845	Full	38.38	38.39	45.82	45.54	320.00	Pass
EHT80	MCS0	2	135	6625	Full	77.76	77.79	91.01	89.50	320.00	Pass
EHT80	MCS0	2	151	6705	Full	77.75	77.84	89.60	89.66	320.00	Pass
EHT80	MCS0	2	167	6785	Full	77.72	77.76	91.84	89.66	320.00	Pass
EHT160	MCS0	2	143	6665	Full	156.94	157.02	175.54	174.38	320.00	Pass

U-NII-7 straddle channel MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	185	6875	Full	19.22	19.17	24.52	23.71	320.00	Pass
EHT40	MCS0	2	187	6885	Full	38.25	38.31	44.72	45.31	320.00	Pass
EHT80	MCS0	2	183	6865	Full	77.82	77.78	89.31	89.31	320.00	Pass
EHT160	MCS0	2	175	6825	Full	157.16	157.23	174.62	175.39	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	117	6535	Full	19.04	18.95	22.01	1.01		23.02	30.00	Pass
EHT20	MCS0	2	117	6535	26/0	9.87	8.73	12.35	1.01		13.36	30.00	Pass
EHT20	MCS0	2	117	6535	52/37	12.61	11.79	15.23	1.01		16.24	30.00	Pass
EHT20	MCS0	2	117	6535	106/53	15.27	14.68	18.00	1.01		19.01	30.00	Pass
EHT20	MCS0	2	117	6535	52T+26T/70	14.25	13.45	16.88	1.01		17.89	30.00	Pass
EHT20	MCS0	2	117	6535	106T+26T/82	16.27	15.79	19.05	1.01		20.06	30.00	Pass
EHT20	MCS0	2	149	6695	Full	18.85	19.21	22.04	1.01		23.05	30.00	Pass
EHT20	MCS0	2	149	6695	26/4	10.11	10.02	13.08	1.01		14.09	30.00	Pass
EHT20	MCS0	2	149	6695	52/38	12.49	12.11	15.31	1.01		16.32	30.00	Pass
EHT20	MCS0	2	149	6695	106/53	15.01	14.92	17.98	1.01		18.99	30.00	Pass
EHT20	MCS0	2	181	6855	Full	19.05	19.14	22.11	1.01		23.12	30.00	Pass
EHT20	MCS0	2	181	6855	26/8	9.59	8.81	12.23	1.01		13.24	30.00	Pass
EHT20	MCS0	2	181	6855	52/40	12.26	11.49	14.90	1.01		15.91	30.00	Pass
EHT20	MCS0	2	181	6855	106/54	15.06	14.92	18.00	1.01		19.01	30.00	Pass
EHT40	MCS0	2	123	6565	Full	19.19	19.11	22.16	1.01		23.17	30.00	Pass
EHT40	MCS0	2	123	6565	242/61	16.39	15.92	19.17	1.01		20.18	30.00	Pass
EHT40	MCS0	2	147	6685	Full	18.83	19.24	22.05	1.01		23.06	30.00	Pass
EHT40	MCS0	2	147	6685	242/61	15.61	16.17	18.91	1.01		19.92	30.00	Pass
EHT40	MCS0	2	179	6845	Full	19.42	19.16	22.30	1.01		23.31	30.00	Pass
EHT40	MCS0	2	179	6845	242/62	16.22	16.08	19.16	1.01		20.17	30.00	Pass
EHT80	MCS0	2	135	6625	Full	18.99	19.09	22.05	1.01		23.06	30.00	Pass
EHT80	MCS0	2	135	6625	484/65	16.05	15.72	18.90	1.01		19.91	30.00	Pass
EHT80	MCS0	2	135	6625	Puncture 20/4	18.16	18.21	21.20	1.01		22.21	30.00	Pass
EHT80	MCS0	2	151	6705	Full	19.18	19.25	22.23	1.01		23.24	30.00	Pass
EHT80	MCS0	2	151	6705	484/65	16.01	16.29	19.16	1.01		20.17	30.00	Pass
EHT80	MCS0	2	151	6705	Puncture 20/1	18.12	18.14	21.14	1.01		22.15	30.00	Pass
EHT80	MCS0	2	167	6785	Full	19.15	18.91	22.04	1.01		23.05	30.00	Pass
EHT80	MCS0	2	167	6785	484/66	15.74	15.31	18.54	1.01		19.55	30.00	Pass
EHT80	MCS0	2	167	6785	Puncture 20/1	18.08	17.74	20.92	1.01		21.93	30.00	Pass
EHT160	MCS0	2	143	6665	Full	18.31	18.92	21.64	1.01		22.65	30.00	Pass
EHT160	MCS0	2	143	6665	996/S67	15.09	15.04	18.08	1.01		19.09	30.00	Pass
EHT160	MCS0	2	143	6665	Puncture20/8	18.41	18.68	21.56	1.01		22.57	30.00	Pass
EHT160	MCS0	2	143	6665	Puncture40/4	17.51	17.69	20.61	1.01		21.62	30.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7			
EHT20	MCS0	2	185	6875	Full	19.47	19.45	22.47	1.01		23.48	30.00	Pass
EHT20	MCS0	2	185	6875	26/8	9.76	9.06	12.43	1.01		13.44	30.00	Pass
EHT20	MCS0	2	185	6875	52/40	12.44	11.77	15.13	1.01		16.14	30.00	Pass
EHT20	MCS0	2	185	6875	106/54	15.41	15.28	18.36	1.01		19.37	30.00	Pass
EHT40	MCS0	2	187	6885	Full	19.07	19.01	22.05	1.01		23.06	30.00	Pass
EHT40	MCS0	2	187	6885	242/62	15.76	15.71	18.75	1.01		19.76	30.00	Pass
EHT80	MCS0	2	183	6865	Full	19.43	19.29	22.37	1.01		23.38	30.00	Pass
EHT80	MCS0	2	183	6865	484/66	16.03	15.78	18.92	1.01		19.93	30.00	Pass
EHT80	MCS0	2	183	6865	Puncture 20/1	18.23	18.19	21.22	1.01		22.23	30.00	Pass
EHT160	MCS0	2	175	6825	Full	18.97	18.76	21.88	1.01		22.89	30.00	Pass
EHT160	MCS0	2	175	6825	996/67	16.14	15.62	18.90	1.01		19.91	30.00	Pass
EHT160	MCS0	2	175	6825	Puncture20/8	18.49	18.11	21.31	1.01		22.32	30.00	Pass
EHT160	MCS0	2	175	6825	Puncture40/4	18.05	17.71	20.89	1.01		21.90	30.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density


U-NII-7 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	117	6535	Full	0.00	0.00		9.19	3.02		12.21	17.00	Pass	
EHT20	MCS0	2	117	6535	26/0	0.00	0.00		9.03	3.02		12.05	17.00	Pass	
EHT20	MCS0	2	117	6535	52/37	0.00	0.00		8.97	3.02		11.99	17.00	Pass	
EHT20	MCS0	2	117	6535	106/53	0.02	0.02		8.87	3.02		11.89	17.00	Pass	
EHT20	MCS0	2	117	6535	52T+26T/70	0.66	0.66		8.86	3.02		11.88	17.00	Pass	
EHT20	MCS0	2	117	6535	106T+26T/82	0.66	0.66		9.05	3.02		12.07	17.00	Pass	
EHT20	MCS0	2	149	6695	Full	0.00	0.00		9.18	3.02		12.20	17.00	Pass	
EHT20	MCS0	2	149	6695	26/4	0.00	0.00		8.75	3.02		11.77	17.00	Pass	
EHT20	MCS0	2	149	6695	52/38	0.00	0.00		9.09	3.02		12.10	17.00	Pass	
EHT20	MCS0	2	149	6695	106/53	0.02	0.02		8.88	3.02		11.90	17.00	Pass	
EHT20	MCS0	2	181	6855	Full	0.00	0.00		9.22	3.02		12.23	17.00	Pass	
EHT20	MCS0	2	181	6855	26/8	0.00	0.00		9.05	3.02		12.06	17.00	Pass	
EHT20	MCS0	2	181	6855	52/40	0.00	0.00		8.84	3.02		11.86	17.00	Pass	
EHT20	MCS0	2	181	6855	106/54	0.02	0.02		8.81	3.02		11.82	17.00	Pass	
EHT40	MCS0	2	123	6565	Full	0.00	0.00		6.82	3.02		9.84	17.00	Pass	
EHT40	MCS0	2	123	6565	242/61	0.00	0.00		6.52	3.02		9.54	17.00	Pass	
EHT40	MCS0	2	147	6685	Full	0.00	0.00		6.83	3.02		9.84	17.00	Pass	
EHT40	MCS0	2	147	6685	242/61	0.00	0.00		6.34	3.02		9.36	17.00	Pass	
EHT40	MCS0	2	179	6845	Full	0.00	0.00		6.94	3.02		9.96	17.00	Pass	
EHT40	MCS0	2	179	6845	242/62	0.00	0.00		6.62	3.02		9.64	17.00	Pass	
EHT80	MCS0	2	135	6625	Full	0.00	0.00		3.86	3.02		6.88	17.00	Pass	
EHT80	MCS0	2	135	6625	484/65	0.06	0.06		3.36	3.02		6.38	17.00	Pass	
EHT80	MCS0	2	135	6625	Puncture 20/4	0.68	0.68		3.79	3.02		6.81	17.00	Pass	
EHT80	MCS0	2	151	6705	Full	0.00	0.00		4.07	3.02		7.09	17.00	Pass	
EHT80	MCS0	2	151	6705	484/65	0.06	0.06		3.51	3.02		6.53	17.00	Pass	
EHT80	MCS0	2	151	6705	Puncture 20/1	0.68	0.68		3.92	3.02		6.93	17.00	Pass	
EHT80	MCS0	2	167	6785	Full	0.00	0.00		3.73	3.02		6.74	17.00	Pass	
EHT80	MCS0	2	167	6785	484/66	0.06	0.06		3.20	3.02		6.21	17.00	Pass	
EHT80	MCS0	2	167	6785	Puncture 20/1	0.68	0.68		3.57	3.02		6.59	17.00	Pass	
EHT160	MCS0	2	143	6665	Full	0.02	0.02		0.53	3.02		3.55	17.00	Pass	
EHT160	MCS0	2	143	6665	996/S67	0.09	0.09		0.45	3.02		3.46	17.00	Pass	
EHT160	MCS0	2	143	6665	Puncture20/8	0.02	0.01		0.21	3.02		3.23	17.00	Pass	
EHT160	MCS0	2	143	6665	Puncture40/4	0.68	0.68	0.33	3.02		3.35	17.00	Pass		

U-NII-7 straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM		
EHT20	MCS0	2	185	6875	Full	0.00	0.00			9.34	3.02	12.36	17.00	Pass	
EHT20	MCS0	2	185	6875	26/8	0.00	0.00			9.33	3.02	12.34	17.00	Pass	
EHT20	MCS0	2	185	6875	52/40	0.00	0.00			8.91	3.02	11.92	17.00	Pass	
EHT20	MCS0	2	185	6875	106/54	0.02	0.02			9.22	3.02	12.24	17.00	Pass	
EHT20	MCS0	2	185	6875	52T+26T/72	0.66	0.66			8.80	3.02	11.81	17.00	Pass	
EHT20	MCS0	2	185	6875	106T+26T/83	0.66	0.66			8.68	3.02	11.69	17.00	Pass	
EHT40	MCS0	2	187	6885	Full	0.00	0.00			6.64	3.02	9.65	17.00	Pass	
EHT40	MCS0	2	187	6885	242/62	0.00	0.00			6.22	3.02	9.23	17.00	Pass	
EHT80	MCS0	2	183	6865	Full	0.00	0.00			4.14	3.02	7.16	17.00	Pass	
EHT80	MCS0	2	183	6865	484/66	0.06	0.06			3.54	3.02	6.55	17.00	Pass	
EHT80	MCS0	2	183	6865	Puncture 20/1	0.68	0.68			4.05	3.02	7.07	17.00	Pass	
EHT160	MCS0	2	175	6825	Full	0.02	0.02			0.90	3.02	3.91	17.00	Pass	
EHT160	MCS0	2	175	6825	996/67	0.09	0.09			0.49	3.02	3.51	17.00	Pass	
EHT160	MCS0	2	175	6825	Puncture20/8	0.02	0.01			0.37	3.02	3.39	17.00	Pass	
EHT160	MCS0	2	175	6825	Puncture40/4	0.68	0.68			0.65	3.02	3.67	17.00	Pass	

**Test Result of 26dB & 99% Occupied Bandwidth**

MIMO <Ant. 1+2>


<802.11a>

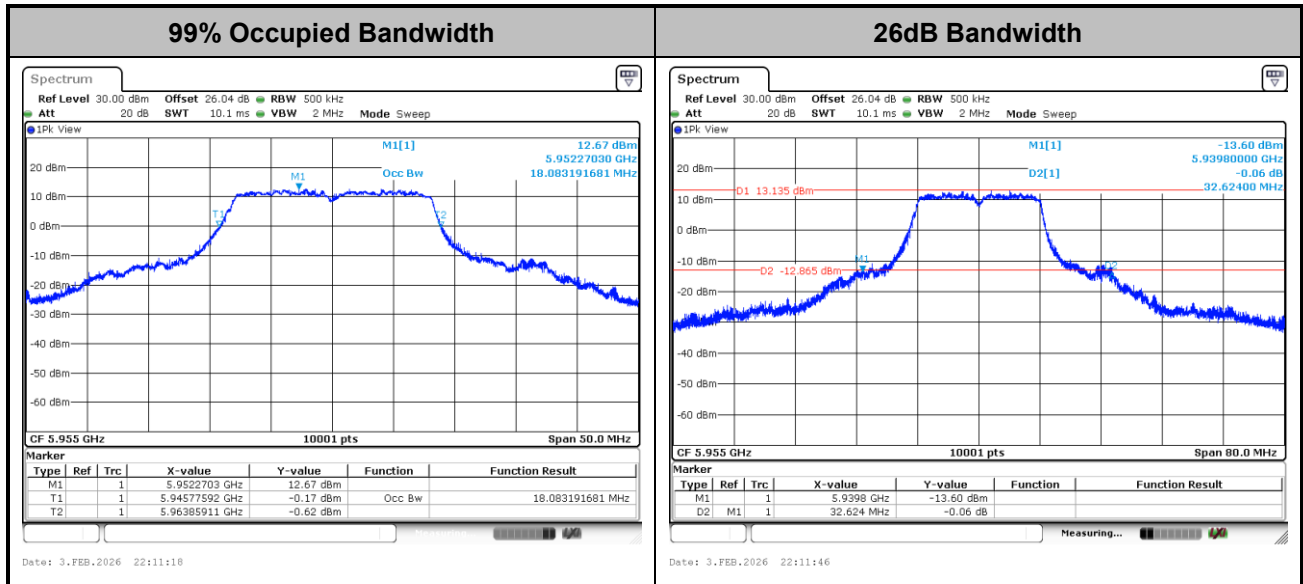

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT20>

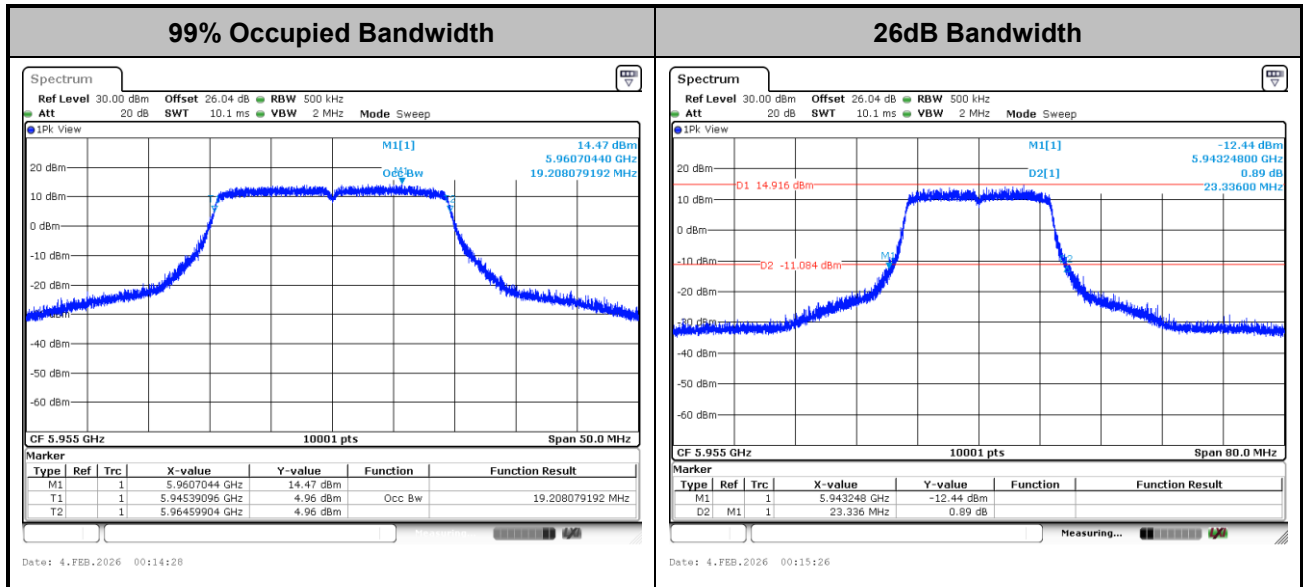

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

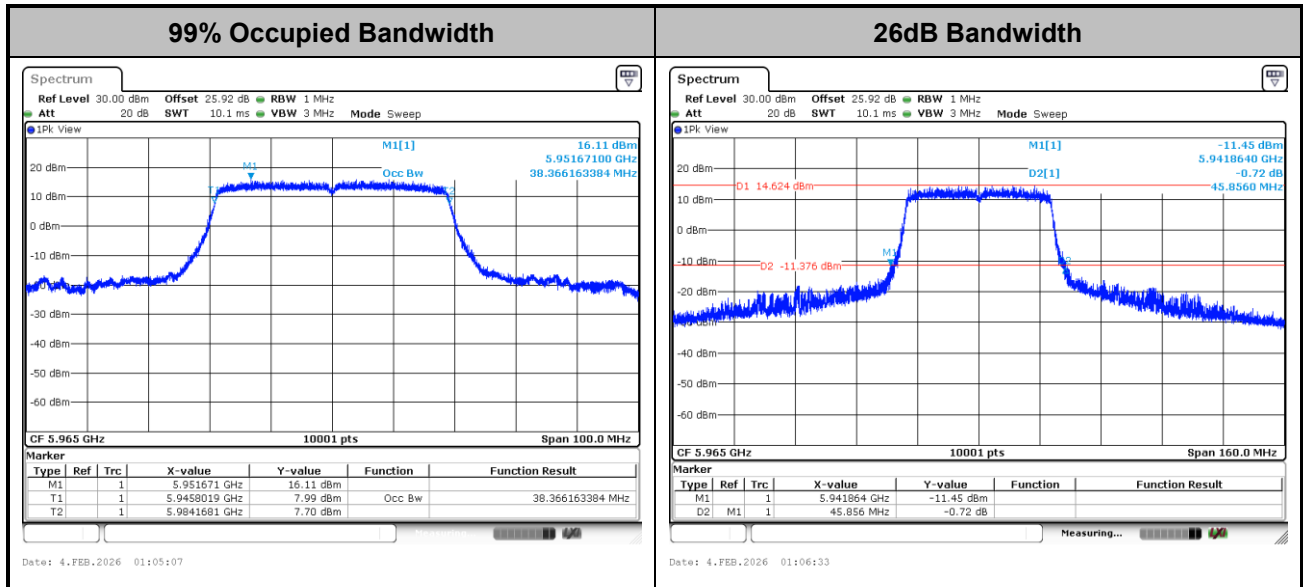

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT80>

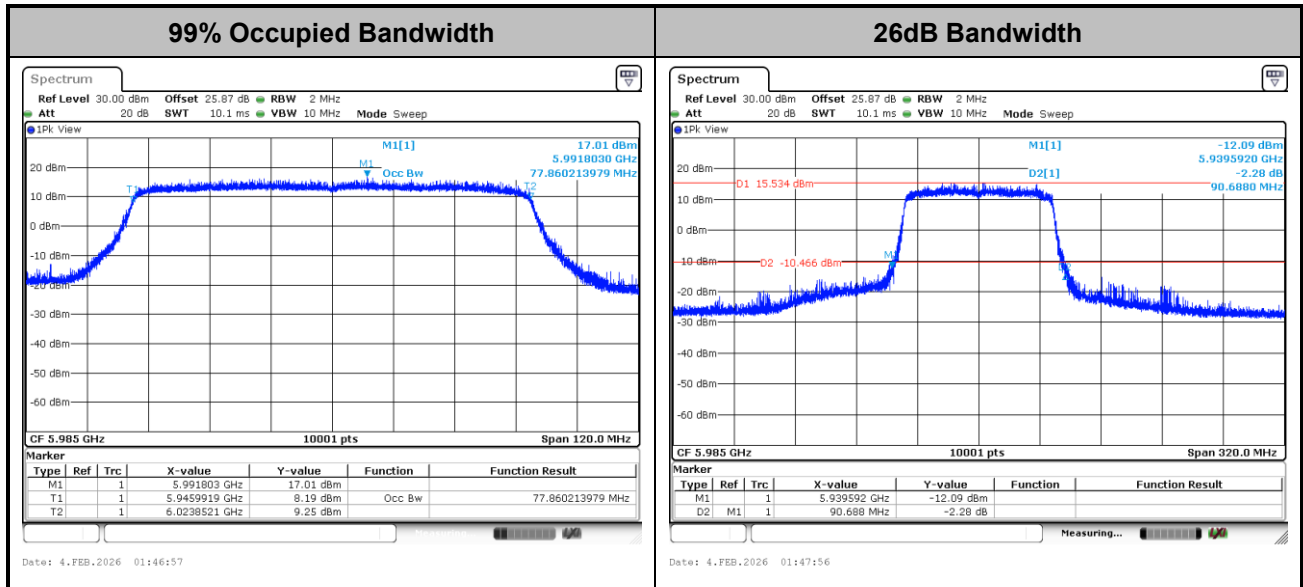

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

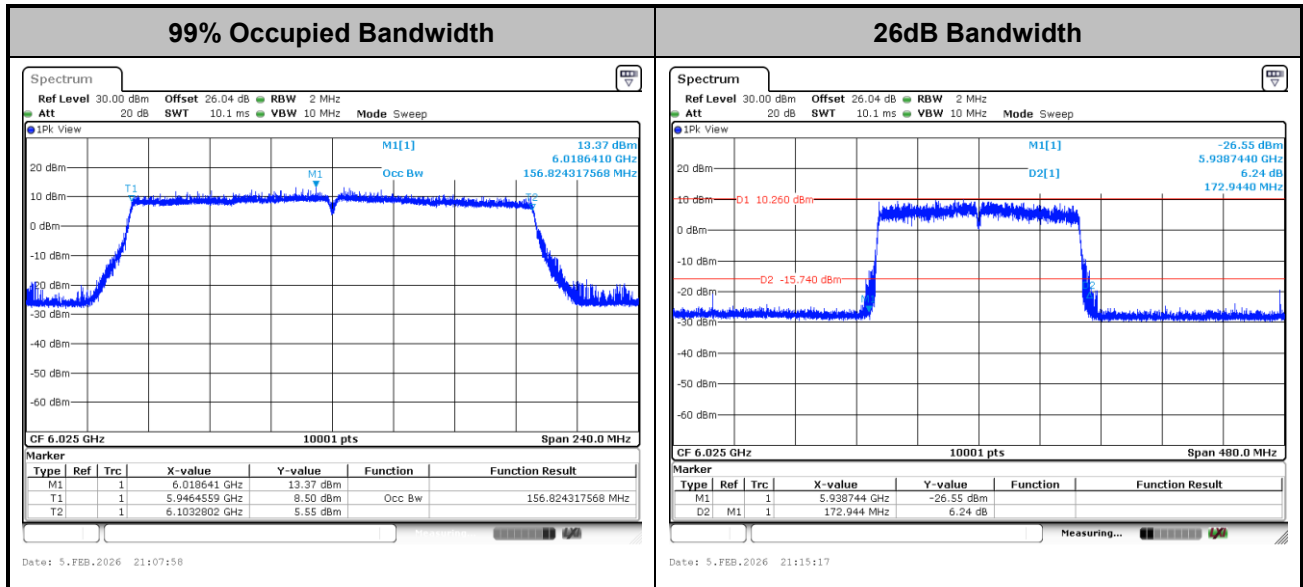

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT320>

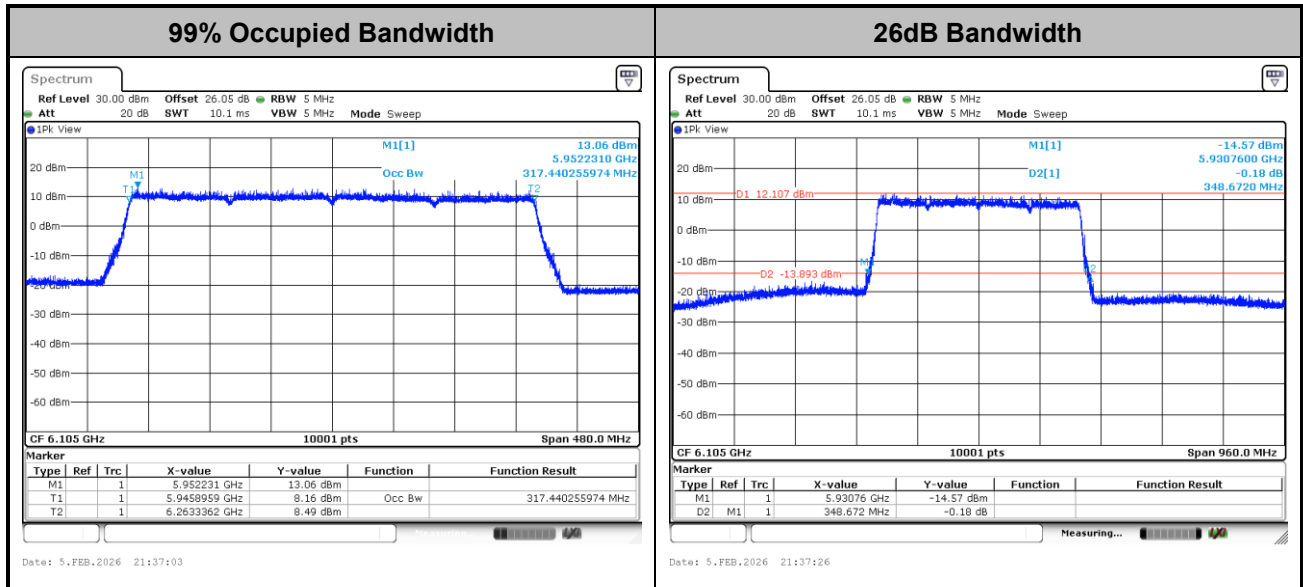



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

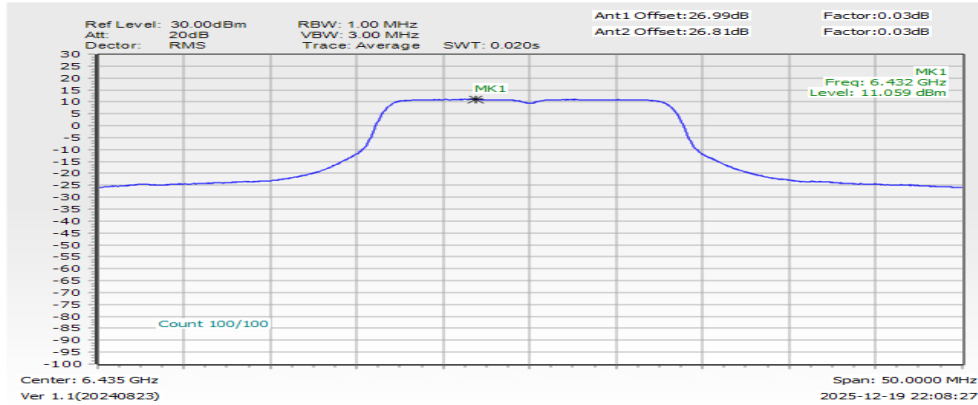Maximum Power Density Plot (dBm/MHz)**Note:**


- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

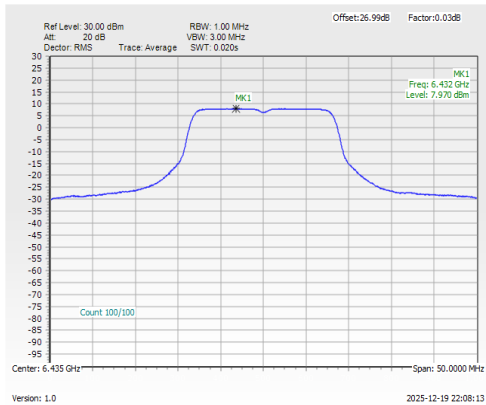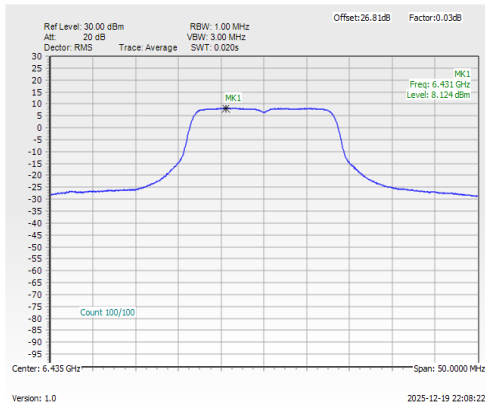Power Density Plot Trace 1 (Ant 1)**Power Density Plot Trace 2 (Ant 2)**



<802.11ax HE20>


Maximum Power Density Plot (dBm/MHz)

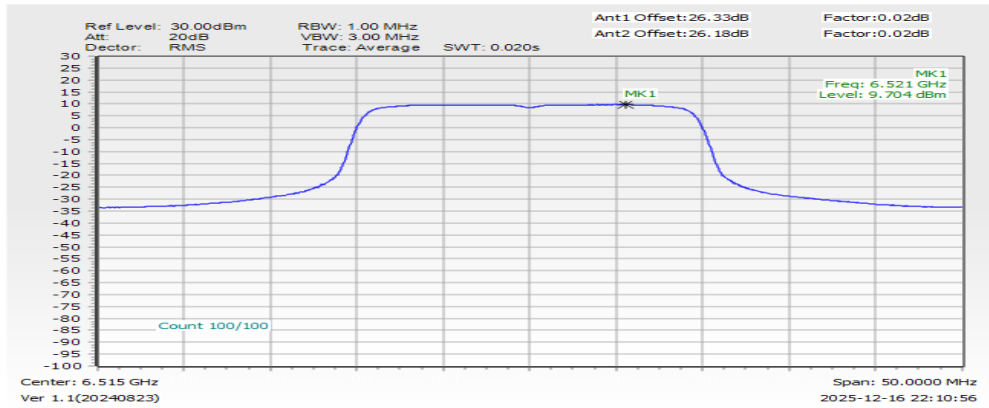


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

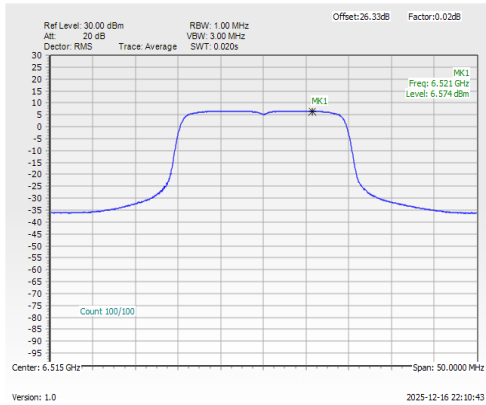


Power Density Plot Trace 2 (Ant 2)

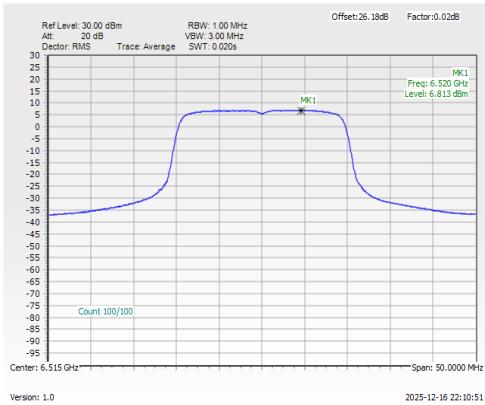



<802.11ax HE40>


Maximum Power Density Plot (dBm/MHz)

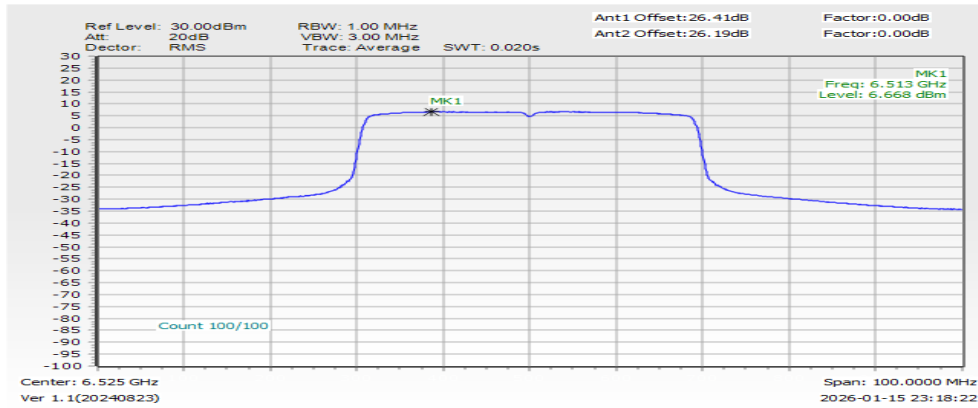


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

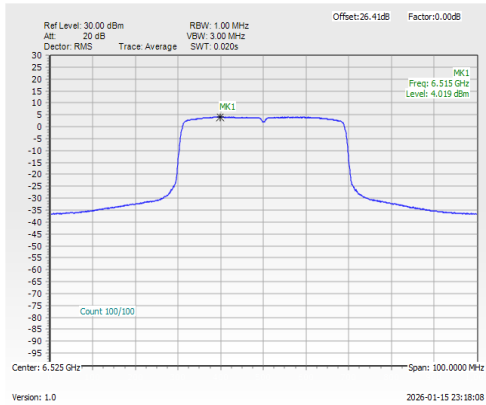


Power Density Plot Trace 2 (Ant 2)

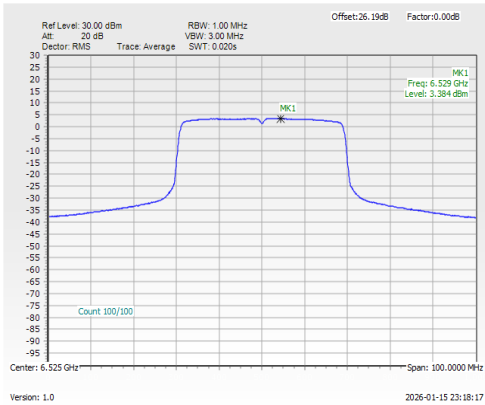



<802.11ax HE80>


Maximum Power Density Plot (dBm/MHz)

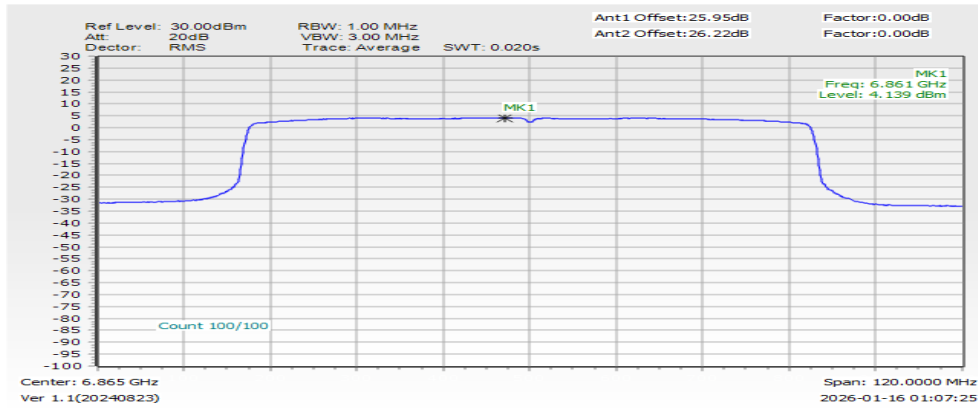


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

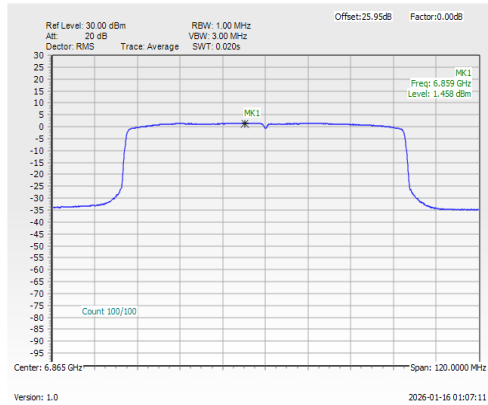


Power Density Plot Trace 2 (Ant 2)

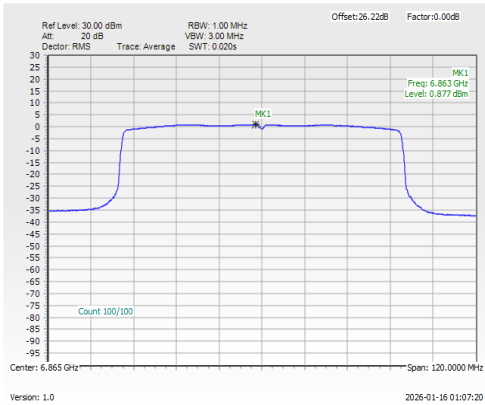



<802.11ax HE160>


Maximum Power Density Plot (dBm/MHz)

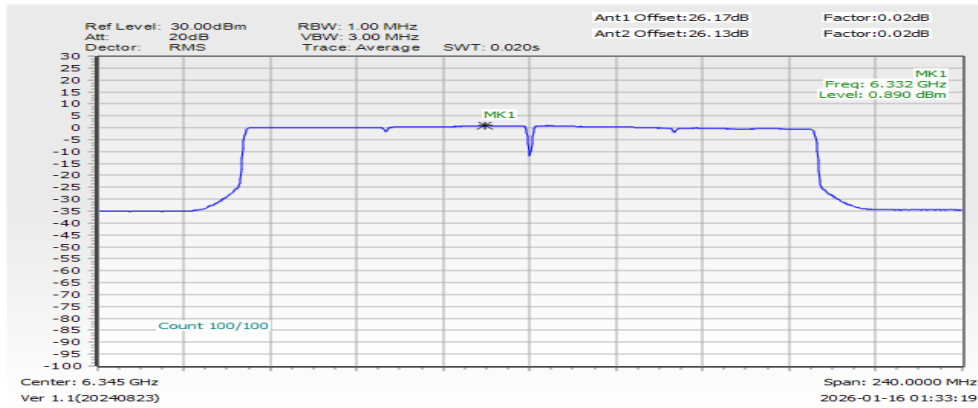


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

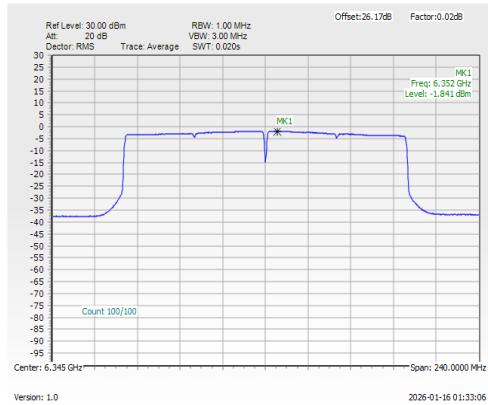


Power Density Plot Trace 2 (Ant 2)

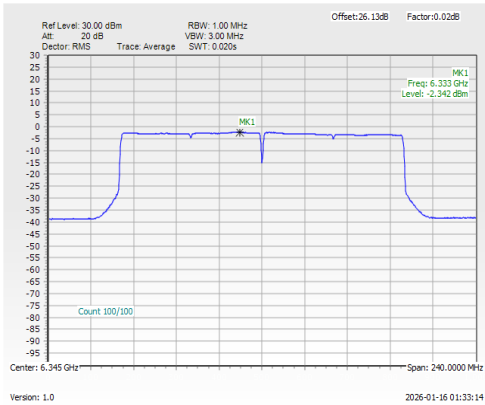



<802.11be EHT20>


Maximum Power Density Plot (dBm/MHz)

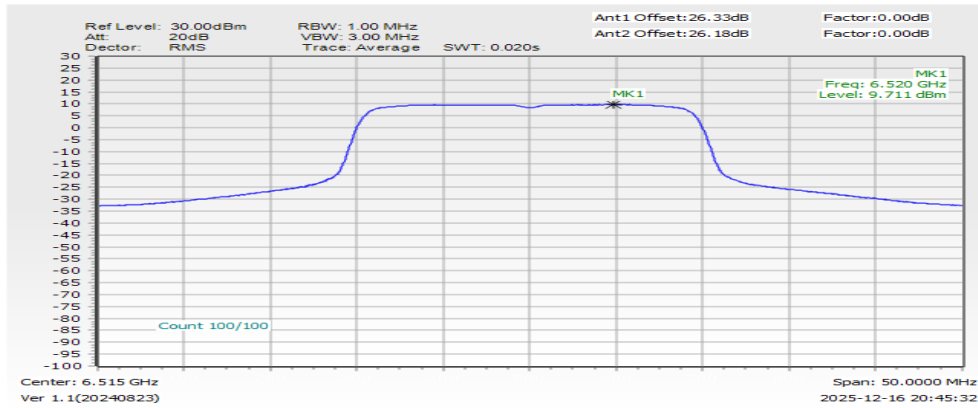


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

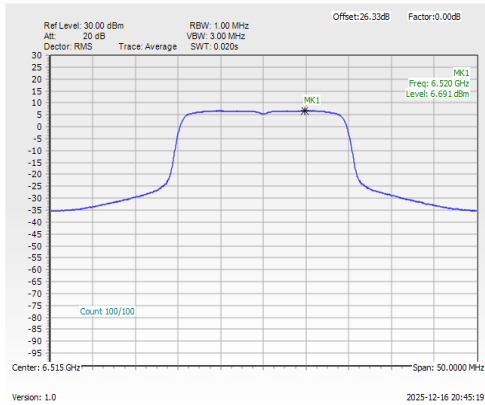


Power Density Plot Trace 2 (Ant 2)

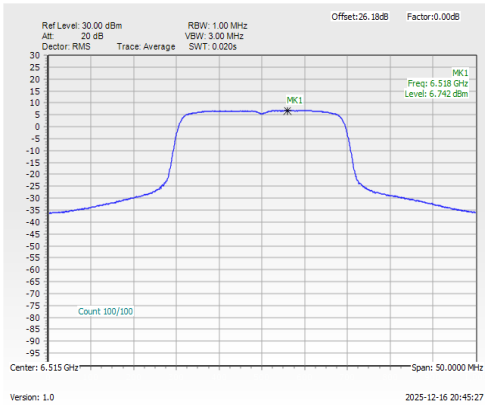



<802.11be EHT40>


Maximum Power Density Plot (dBm/MHz)

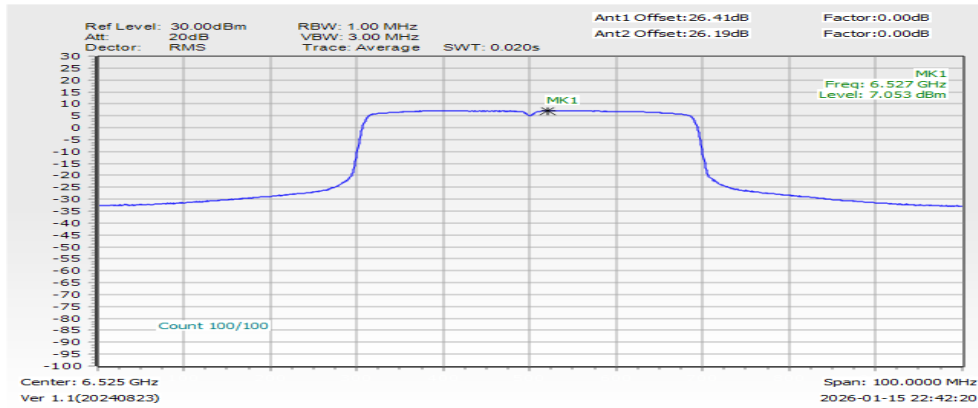


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

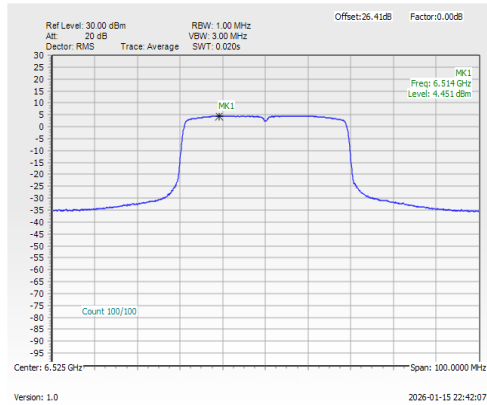


Power Density Plot Trace 2 (Ant 2)

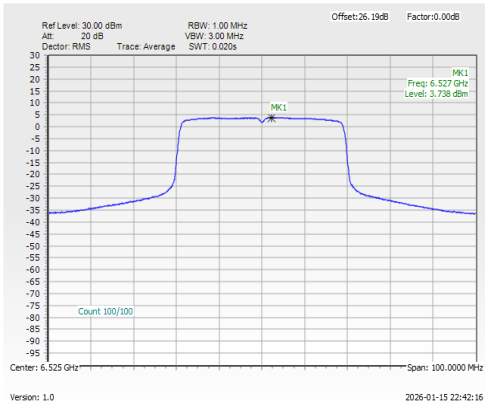



<802.11be EHT80>


Maximum Power Density Plot (dBm/MHz)

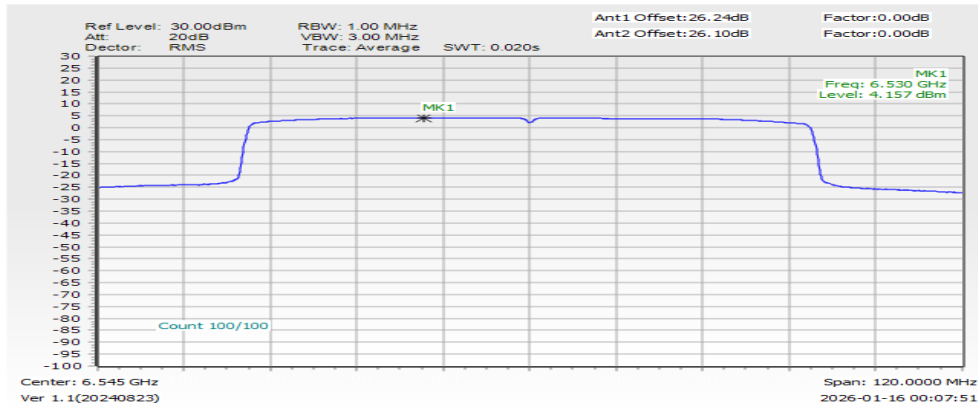


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

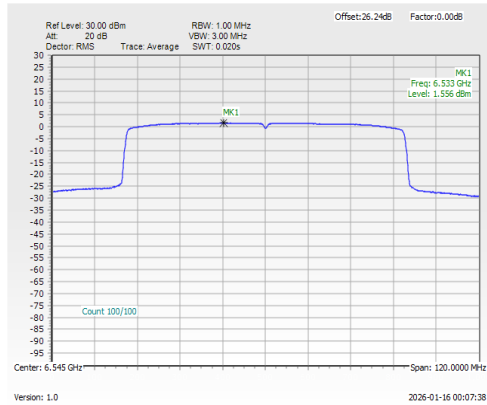


Power Density Plot Trace 2 (Ant 2)

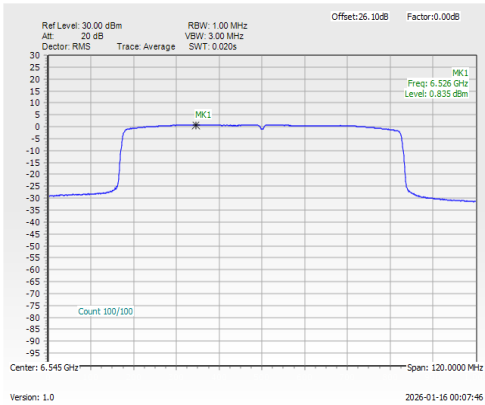



<802.11be EHT160>


Maximum Power Density Plot (dBm/MHz)

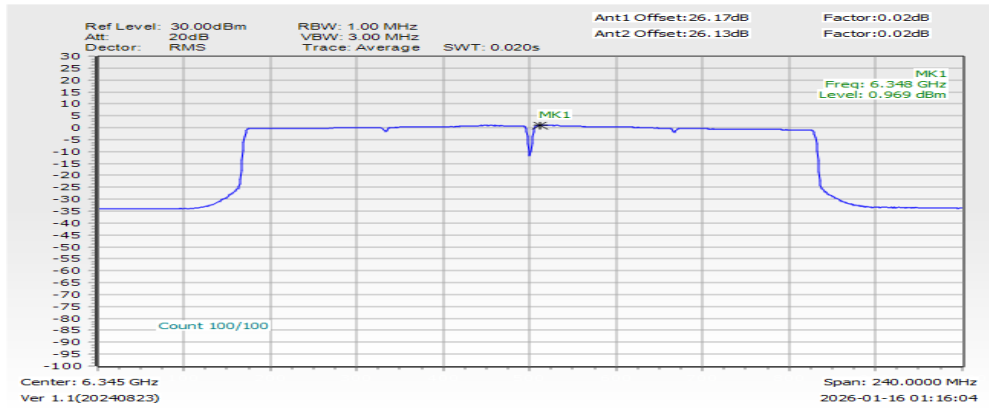


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

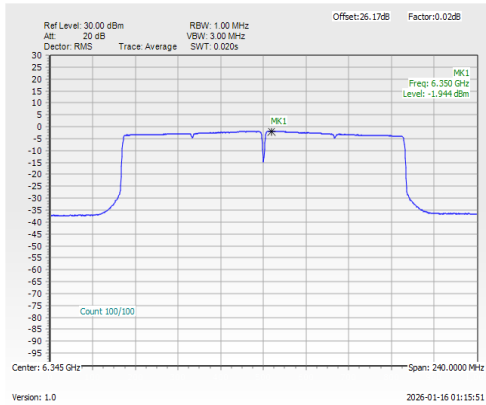


Power Density Plot Trace 2 (Ant 2)

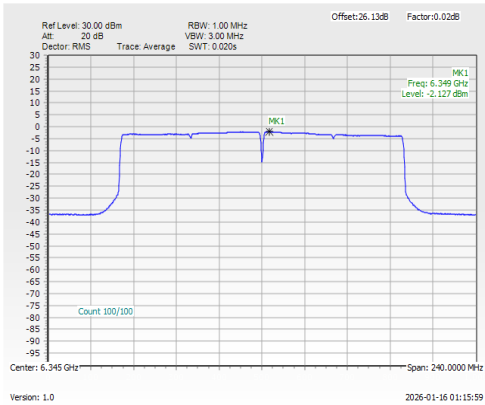



<802.11be EHT320>


Maximum Power Density Plot (dBm/MHz)

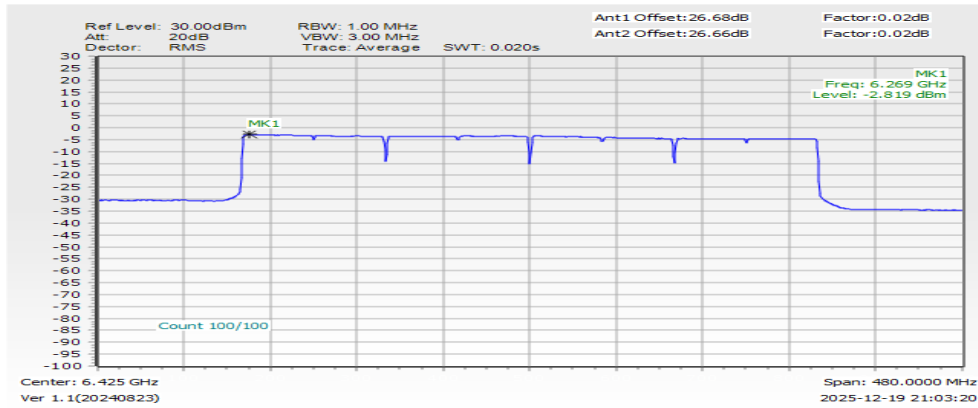


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 1)

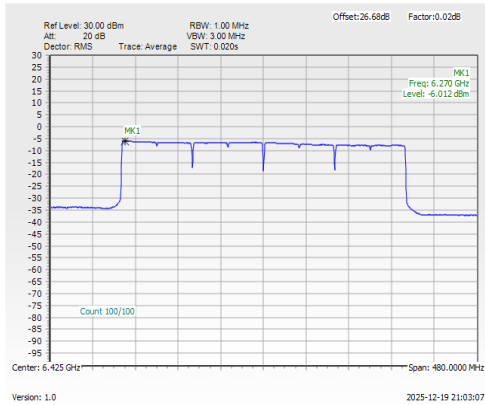

Power Density Plot Trace 2 (Ant 2)

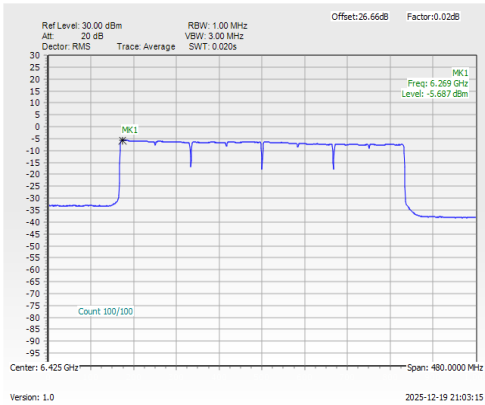




In-Band Emissions (Channel Mask)

MIMO <Ant. 1+2(Ant1)>

EUT Mode


802.11a

Plot on 5955 MHz

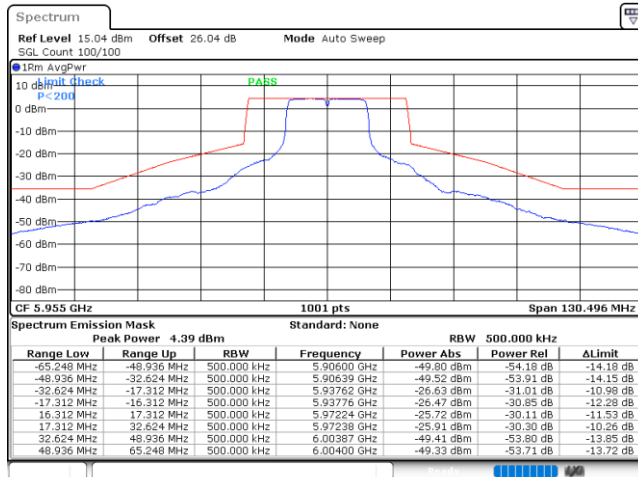


Date: 3.FEB.2026 22:13:17

Plot on 6195 MHz

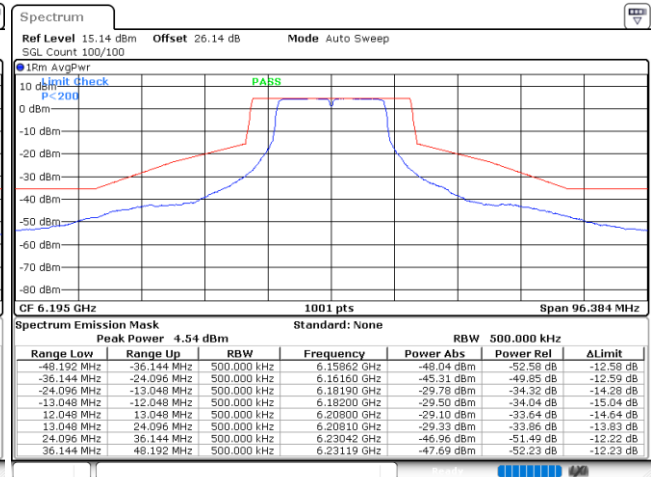


Date: 3.FEB.2026 22:16:49

Plot on 6415 MHz

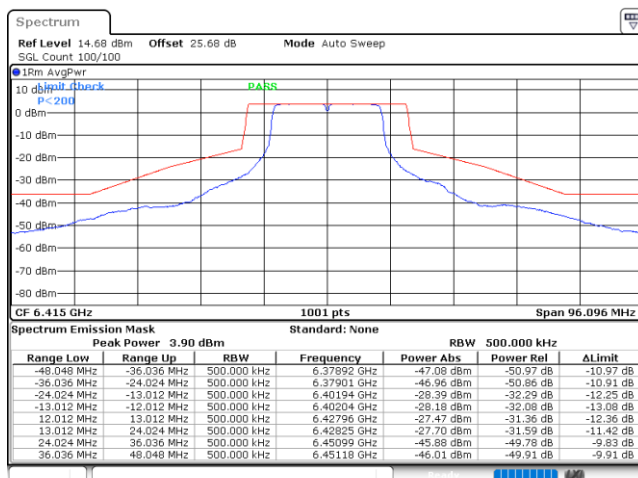

Date: 3.FEB.2026 22:18:57


Plot on 6435 MHz

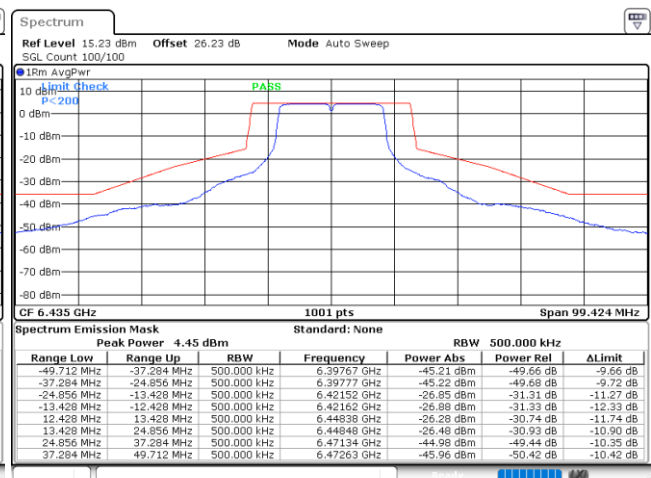

Date: 3.FEB.2026 22:22:42




Plot on 6475 MHz

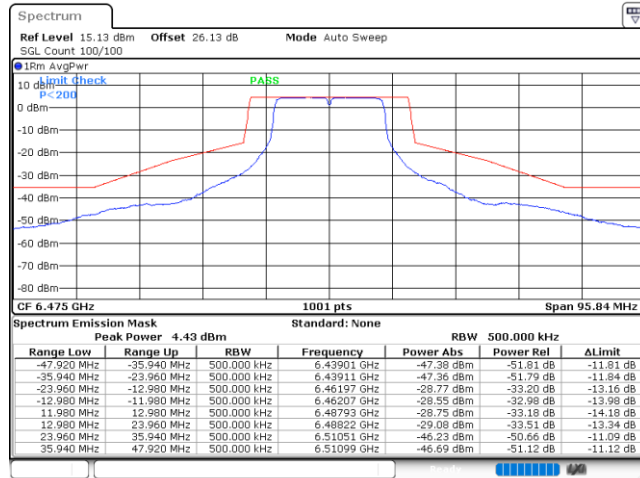


Date: 3.FEB.2026 22:25:44

Plot on 6515 MHz

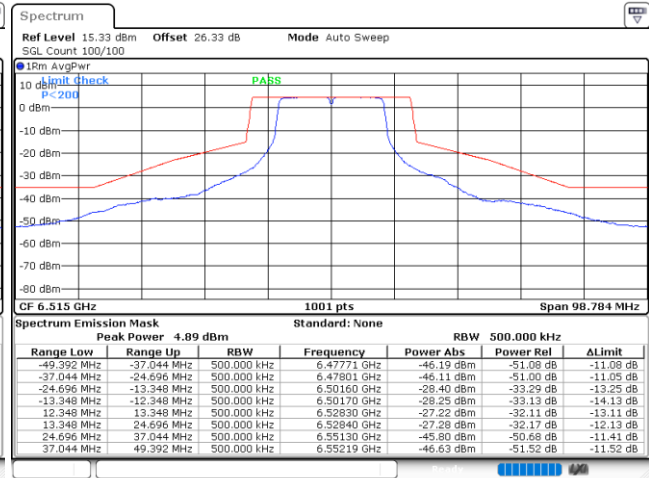


Date: 3.FEB.2026 22:29:48

Plot on 6535 MHz

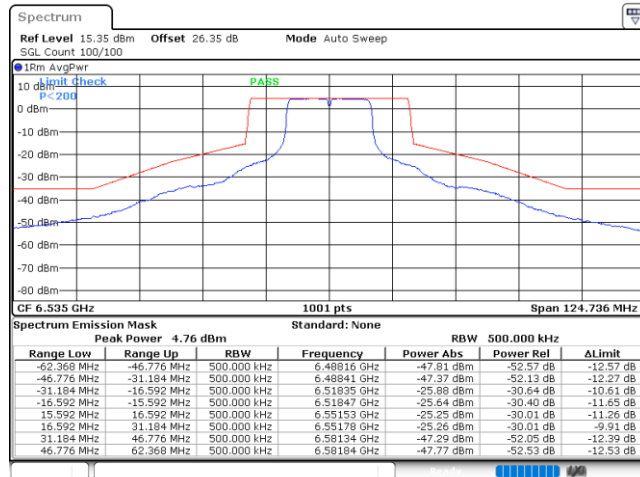

Date: 3.FEB.2026 23:42:00


Plot on 6695 MHz

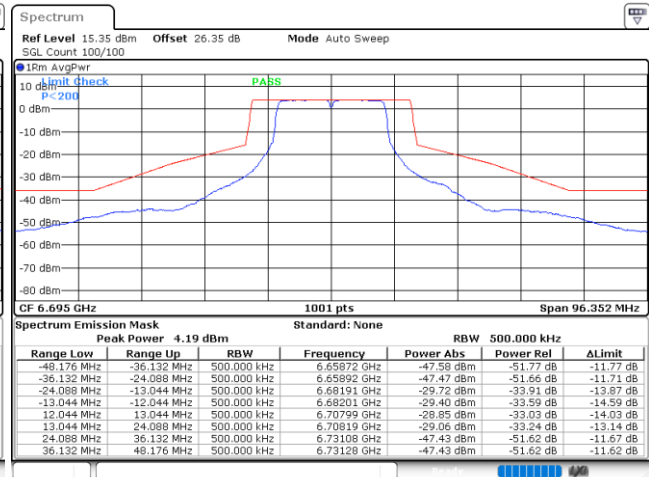

Date: 3.FEB.2026 23:48:13




Plot on 6855 MHz

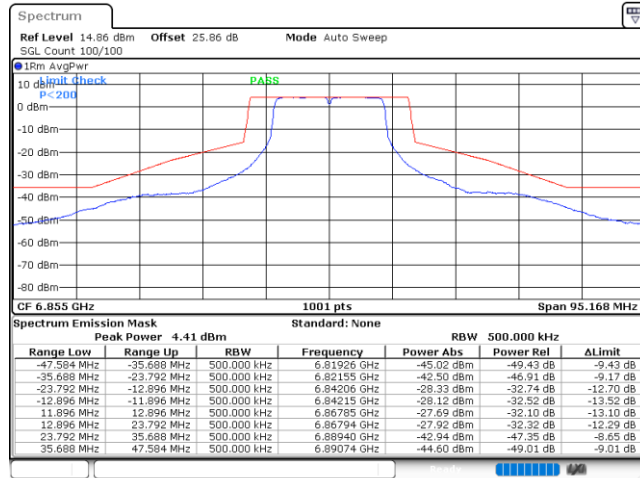

Date: 3.FEB.2026 23:54:11

Plot on 6875 MHz

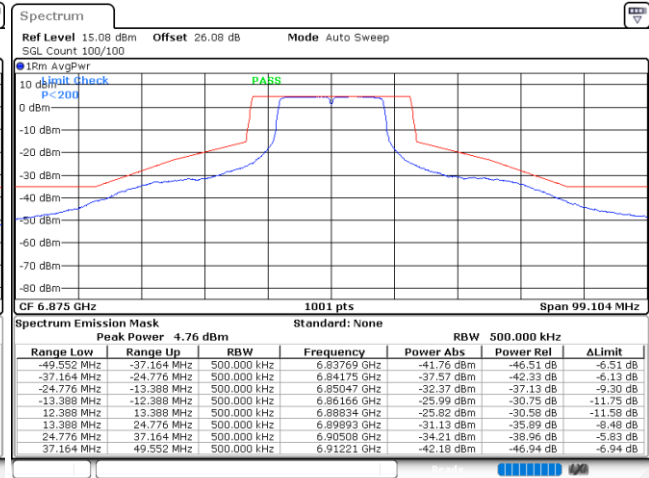


Date: 4.FEB.2026 00:02:47



EUT Mode


802.11be EHT20 FullRU

Plot on 5955 MHz

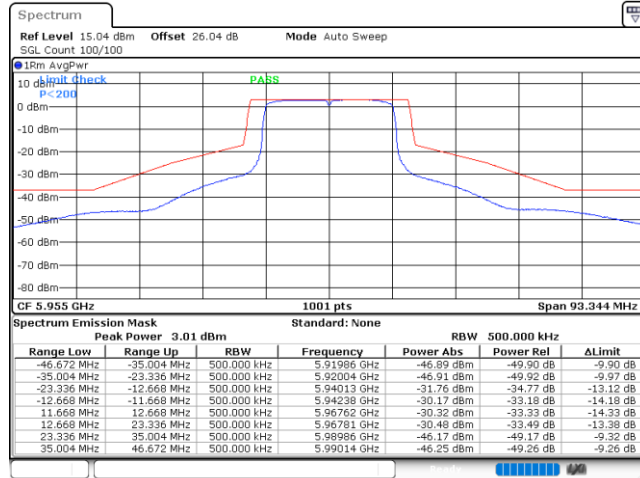


Date: 4.FEB.2026 00:16:48

Plot on 6195 MHz

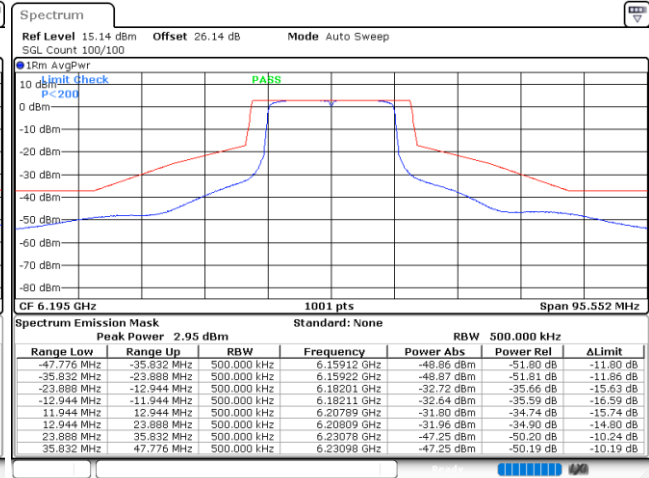


Date: 4.FEB.2026 00:21:44

Plot on 6415 MHz

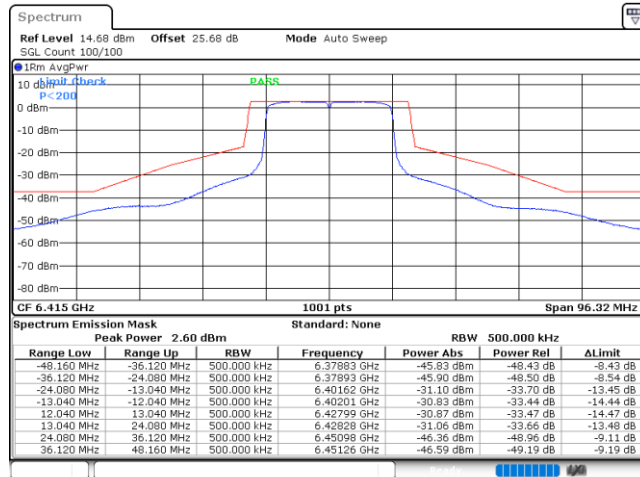

Date: 4.FEB.2026 00:28:27


Plot on 6435 MHz

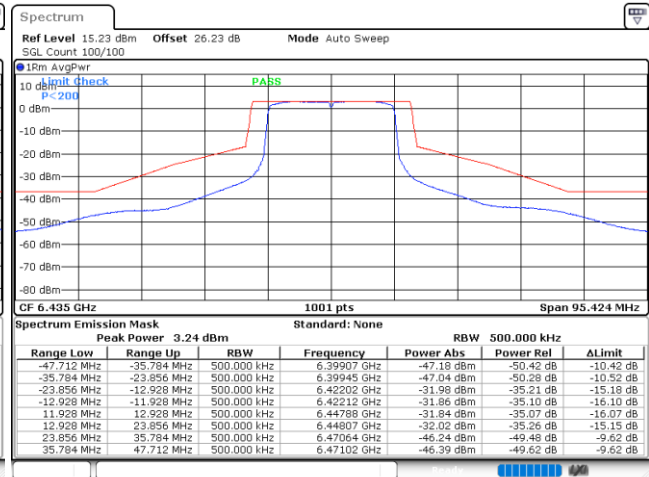

Date: 4.FEB.2026 00:32:28




Plot on 6475 MHz

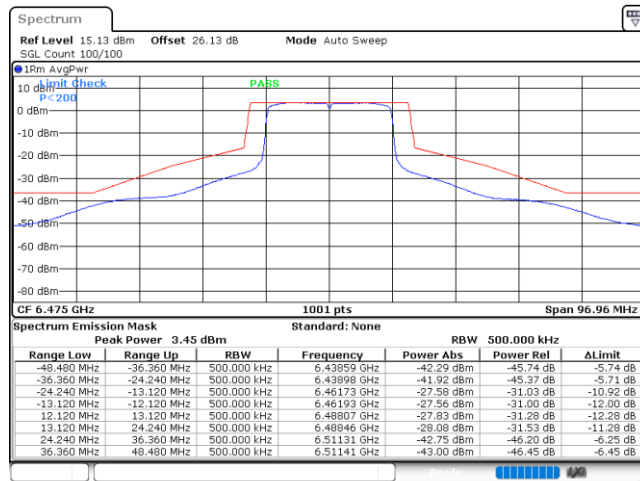


Date: 4.FEB.2026 00:44:12

Plot on 6515 MHz

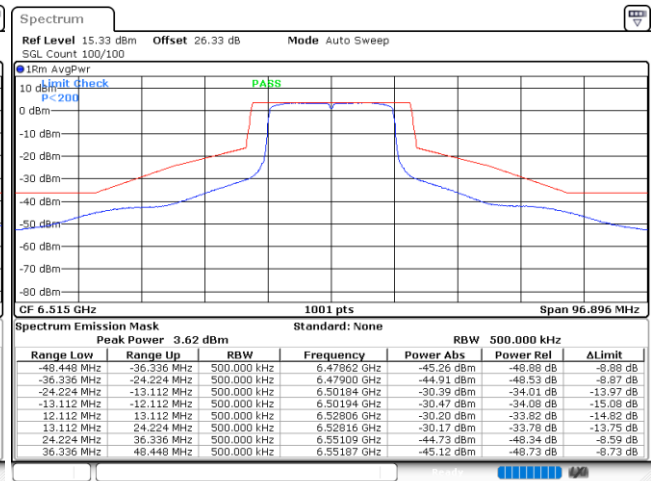


Date: 4.FEB.2026 00:47:59

Plot on 6535 MHz

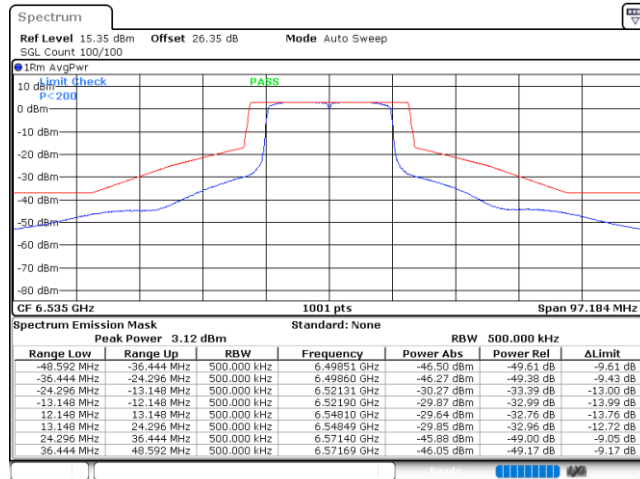

Date: 4.FEB.2026 00:52:41


Plot on 6695 MHz

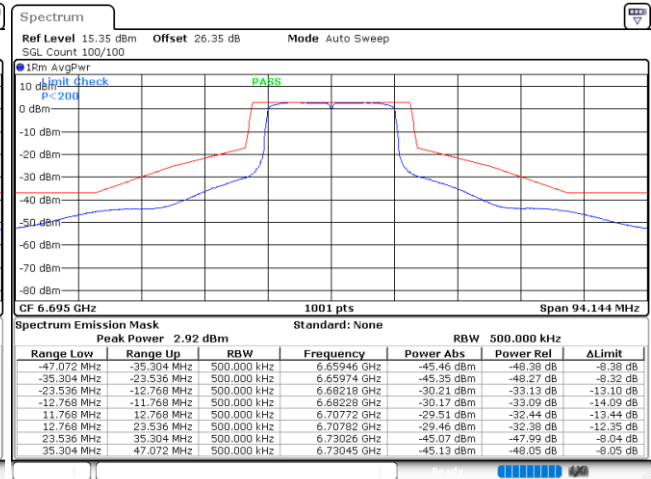

Date: 4.FEB.2026 00:55:23




Plot on 6855 MHz

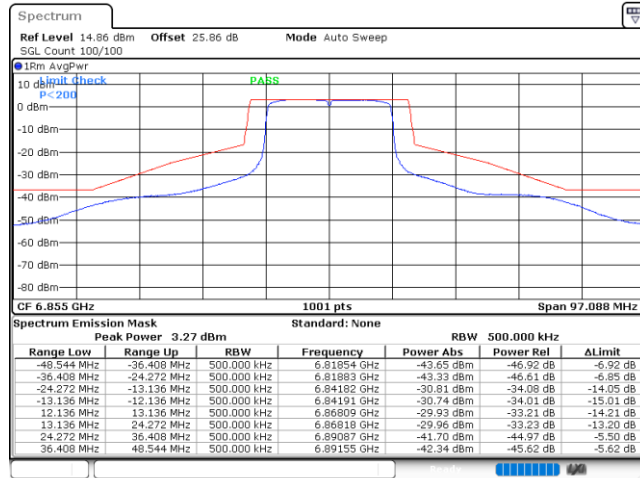

Date: 4.FEB.2026 00:58:50

Plot on 6875 MHz

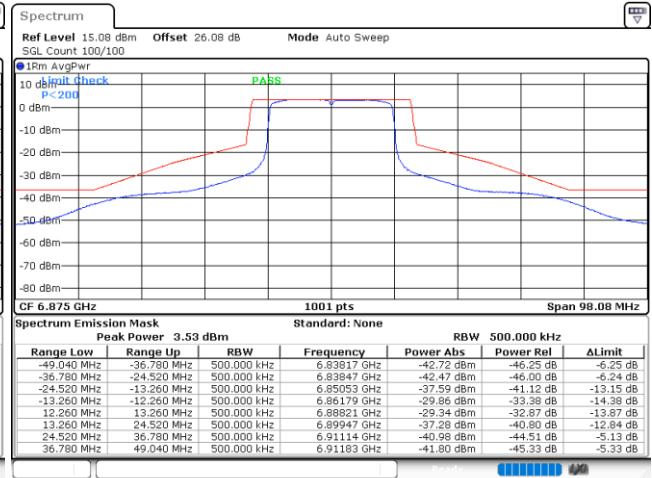


Date: 4.FEB.2026 01:01:31



EUT Mode


802.11be EHT20 26RU0

Plot on 5955 MHz

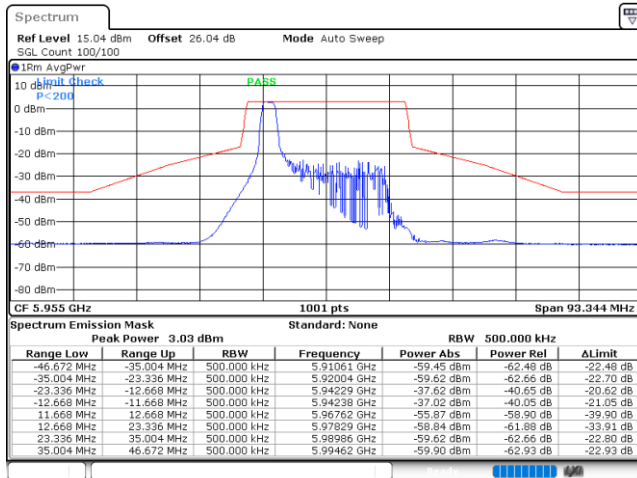


Date: 5.FEB.2026 23:24:43

Plot on 6435 MHz

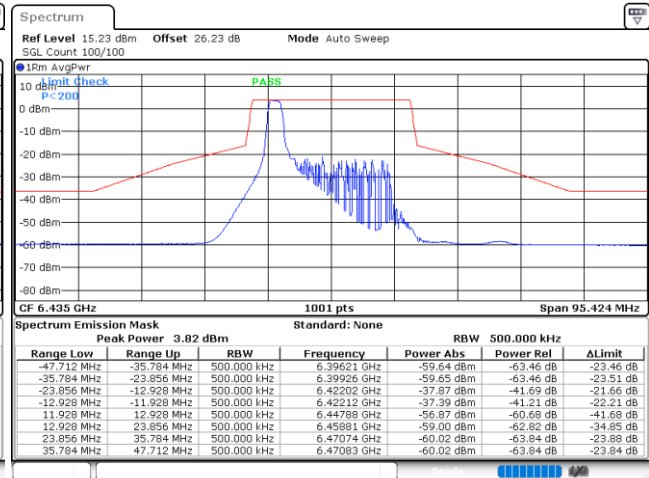

Date: 6.FEB.2026 01:11:02

Plot on 6535 MHz

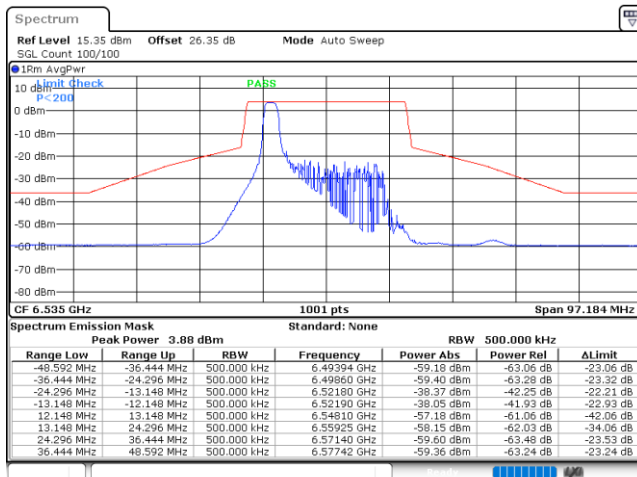


Date: 8.FEB.2026 11:34:10



EUT Mode


802.11be EHT20 26RU4

Plot on 6195 MHz

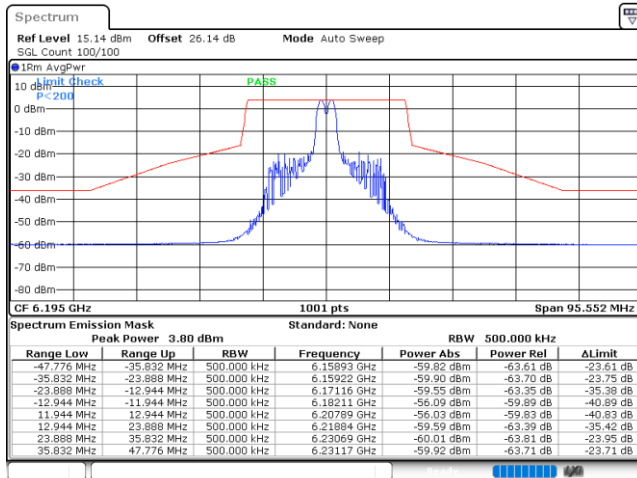


Date: 5.FEB.2026 23:58:07

Plot on 6475 MHz

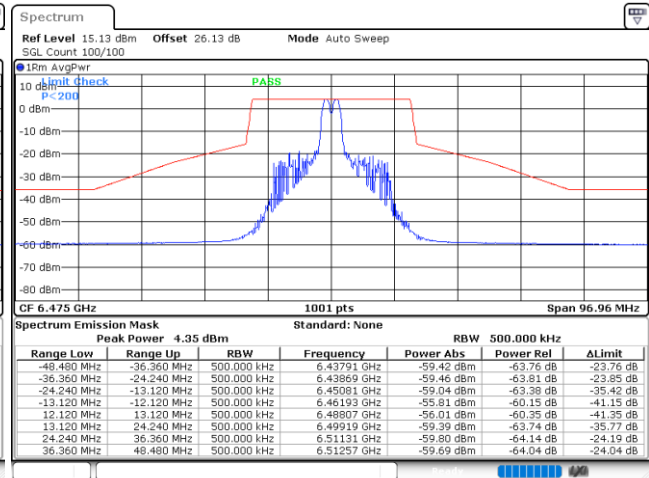

Date: 6.FEB.2026 01:41:54

Plot on 6695 MHz

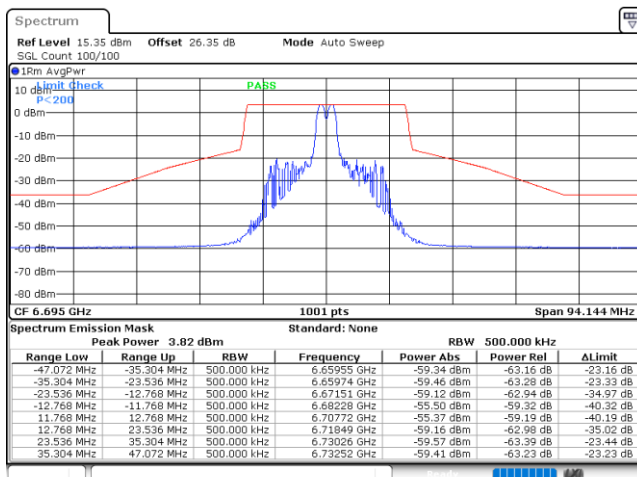


Date: 8.FEB.2026 11:51:34



EUT Mode


802.11be EHT20 26RU8

Plot on 6415 MHz

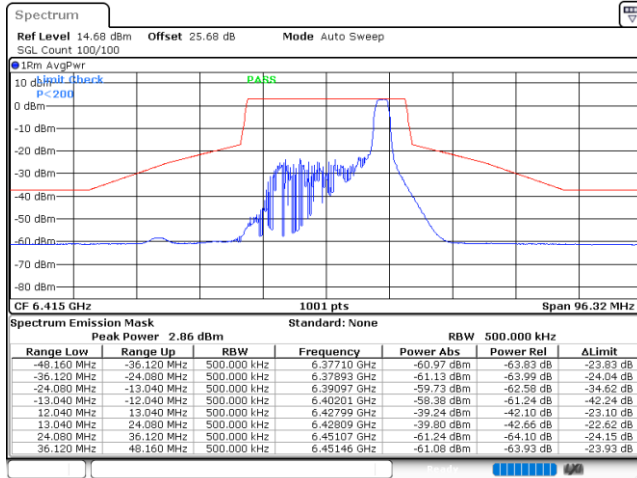


Date: 6.FEB.2026 00:13:07

Plot on 6515 MHz

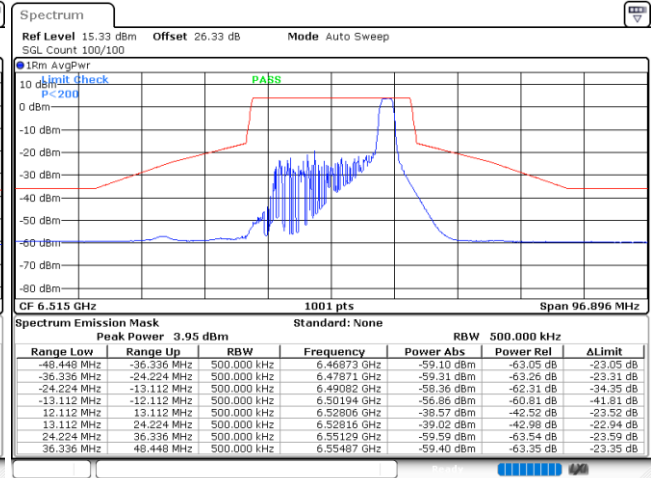


Date: 8.FEB.2026 11:17:13

Plot on 6855 MHz

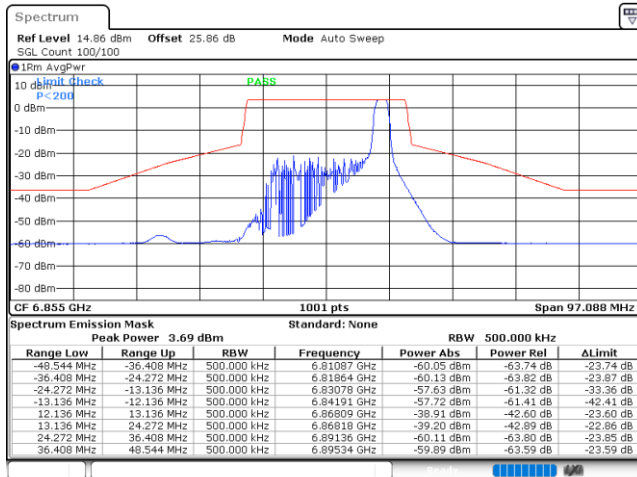

Date: 8.FEB.2026 12:05:32

Plot on 6875 MHz

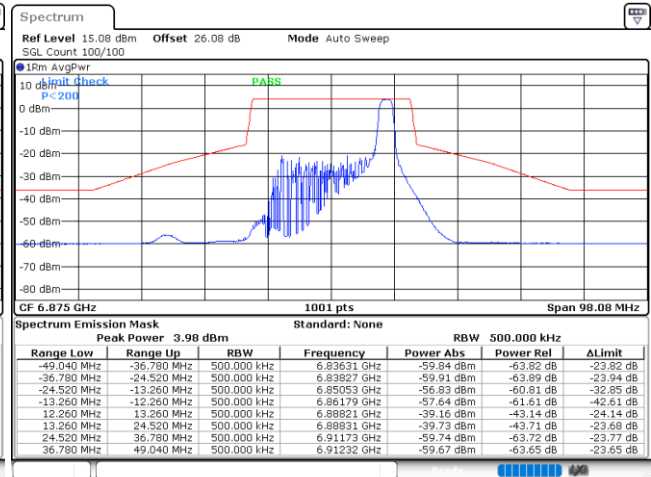


Date: 8.FEB.2026 12:13:20



EUT Mode


802.11be EHT20 52RU37

Plot on 5955 MHz

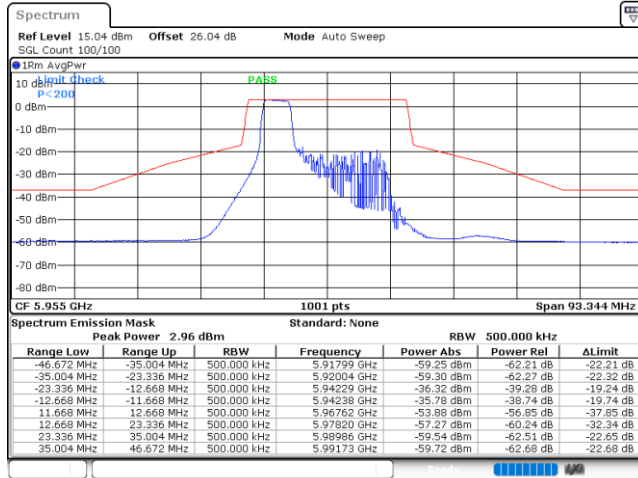


Date: 5.FEB.2026 23:27:17

Plot on 6435 MHz

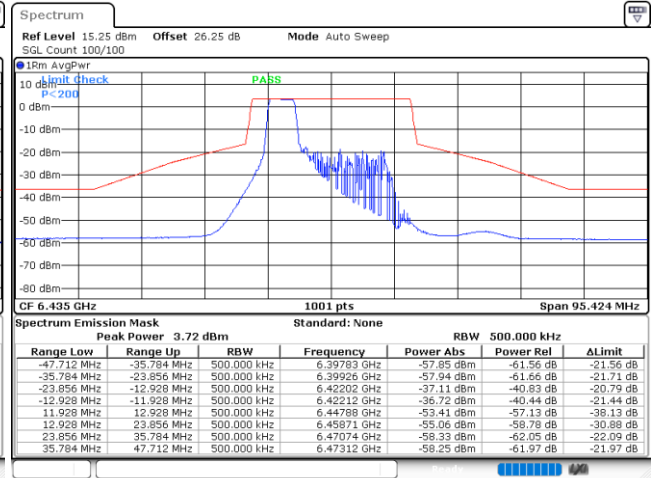

Date: 6.FEB.2026 01:19:24

Plot on 6535 MHz

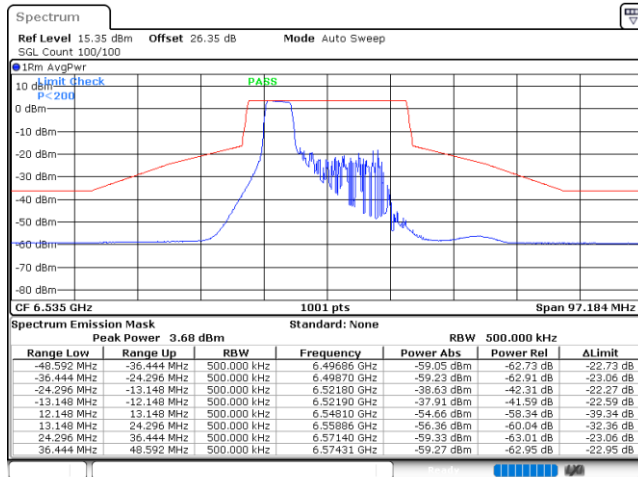

Date: 8.FEB.2026 11:35:47