FCC RADIO TEST REPORT

FCC ID	:	UZ7TCW010
Equipment	:	Touch Computer
Brand Name	:	ZEBRA
Model Name	:	TCW010
Applicant	:	Zebra Technologies Corporation 3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer	:	Zebra Technologies Corporation 3 Overlook Point, Lincolnshire, IL 60069 USA
Standard	:	FCC Part 15 Subpart E §15.407

The product was received on Nov. 28, 2025 and testing was performed from Dec. 12. 2025 to Feb. 15, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

TEL : 886-3-327-0868
FAX : 886-3-327-0855

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Product Specification of Equipment Under Test 6
1.3 Modification of EUT 8
1.4 Testing Location 8
1.5 Applicable Standards 8
2 Test Configuration of Equipment Under Test **9**
2.1 Carrier Frequency and Channel 9
2.2 Test Mode 10
2.3 Connection Diagram of Test System 11
2.4 Support Unit used in test configuration and system 13
2.5 EUT Operation Test Setup 13
2.6 Measurement Results Explanation Example 13
3 Test Result **14**
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14
3.2 Maximum Conducted Output Power Measurement 15
3.3 Power Spectral Density Measurement 16
3.4 Unwanted Emissions Measurement 18
3.5 AC Conducted Emission Measurement 23
3.6 Antenna Requirements 25
4 List of Measuring Equipment **26**
5 Measurement Uncertainty **28**
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission Test Result
Appendix D. Duty Cycle Plots
Appendix E. Setup Photographs

History of this test report

Report No.	Version	Description	Issue Date
FR5N0610-01F	01	Initial issue of report	Mar. 27, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	2.6 dB under the limit at 5649.18 MHz
3.5	15.207	AC Conducted Emission	Pass	10.98 dB under the limit at 1.446 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	ZEBRA
Model Name	TCW010
FCC ID	UZ7TCW010
Sample 1	Basic + SE4730(SR500)
Sample 2	Basic + SE56(AC670)
Sample 3	Premium + SE4730(SR500)
Sample 4	Premium + SE56(AC670)
Sample 5	HC_Basic (no scanner)
Sample 6	HC_Premium + SE4730(SR500)
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be ETH20/ETH40/ETH80/ETH160/ETH320 Bluetooth BR/EDR/LE
SW Version	15-12-29.00-VG-U00-PRD-ERS-04
FW Version	FUSION_QA_7_1.3.0.002_V
MFD	18-Nov-25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter 1	**Brand Name**	Zebra	**Model Name**	SAWA-65-20005A
Battery 1 (1x)	**Brand Name**	Zebra	**Model Name**	BT-000473
Battery 2 (1.5x)	**Brand Name**	Zebra	**Model Name**	BT-000473E
USB TYPE A to TYPE C cable	**Brand Name**	Zebra	**Part Number**	CBL-TC2X-USBC-01
USB TYPE C to TYPE C cable	**Brand Name**	Zebra	**Part Number**	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	**Brand Name**	Zebra	**Part Number**	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack.	**Brand Name**	Zebra	**Part Number**	HDST-35MM-PTVP-02
USB-C to 3.5mm adapter cable	**Brand Name**	Zebra	**Part Number**	ADP-USBC-35MM1-01
HS2100 rugged wired headset	**Brand Name**	Zebra	**Part Number**	HS2100-BTN-LSB
HS2100 Headset Cable for connecting the HS2100 Headset via 3.5mm	**Brand Name**	Zebra	**Part Number**	CBL-HS2100-3MS1-01
Rugged boot	**Brand Name**	Zebra	**Part Number**	SG-TC2L-BOOT-01
Handstrap	**Brand Name**	Zebra	**Part Number**	SG-TC2L-HSTRP1-01
Trigger Handle	**Brand Name**	Zebra	**Part Number**	CRG-TC2L-SNP1-01
Arm Mounts	**Brand Name**	Zebra	**Part Number**	SG-TC2L-ARMNT-01
Soft Holster	**Brand Name**	Zebra	**Part Number**	SG-TC2L-HLSTR1-01
HS3100 rugged Bluetooth headset	**Brand Name**	Zebra	**Part Number**	HS3100-OTH

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5725 MHz ~ 5850 MHz
Antenna Type / Gain	**<Ant. 6>:** IFA Antenna with gain -0.15 dBi **<Ant. 7>:** IFA Antenna with gain 0.90 dBi
Type of Modulation	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096QAM)
Antenna Function Description	

	Ant. 6	Ant. 7
802.11 a/n/ac/ax MIMO	V	V

Remark:

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = 10 log(NANT/NSS) dB.

$$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;

G_k is the gain in dBi of the kth antenna.

As minimum N_{SS}=1 is supported by EUT, the formula can be simplified as:

Directional gain = $10*\log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi

Where G1, G2….GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Ant 1 (dBi)	Ant 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	-0.15	0.90	0.90	3.40	0.00	0.00

Calculation example:

If a device has two antenna, G_{ANT1}= -0.15dBi; G_{ANT2}= 0.90dBi

Directional gain of power measurement = max(-0.15, 0.90) + 0 = 0.90 dBi

Directional gain of PSD derived from formula which is

10 x log { { [10^ (-0.15 dBi / 20) + 10^ (0.90 dBi / 20)] ^ 2 } / 2 }

= 3.40 dBi

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- FCC Part 15 Subpart E
- ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU, M-RU, and channel puncture.

The PSD of partial RU, M-RU and channel puncture are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n, 802.11ac, and 802.11ax modes were smaller than 802.11be mode, so all other conducted test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11be EHT20	MCS0
802.11be EHT 40	MCS0
802.11be EHT 80	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1: WLAN 5G Link + BT Idle with HS3100 BT headset + Scanner + 1.5xBattery + USB cable data link with Notebook + Copy data from NB to EDA (eMMC) for Sample 1

Remark:
1. The worst case of Conducted Emission is mode 1; only the test data of it was reported.
2. For Radiated Test Cases, the tests were performed with Sample 1.
3. The detailed Radiated test modes are shown in Appendix C.
4. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

This device supports WiFi 7 puncturing and Multi RU features.

80M channel puncturing 20M M-RU_RU484+RU242	-	242	484	
	242	-	484	
	484		-	242
	484		242	-

2.3 Connection Diagram of Test System

<WLAN Tx with Adapter Mode>

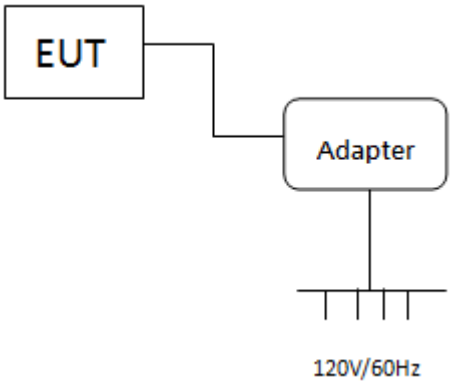

<AC Conducted Emission Mode>

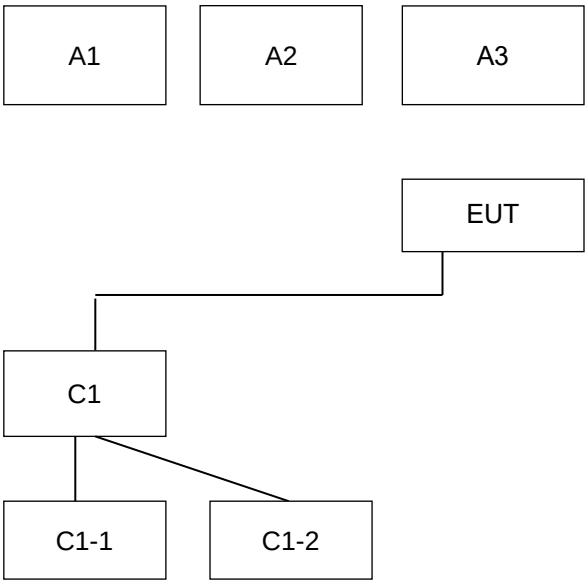

Conduction Test Setup										
No.	Wireless Station	Connection Type	Test Mode							
			1							
A1	BT Earphone	Bluetooth	X							
A2	AP router	WiFi	X							
A3	Bar code	scanner	X							
No.	**Setup Peripherals**	**Connection Type**	**1**							
C1	Notebook	USB Cable	X							
C1-1	IPod	USB Cable to C1	X							
C1-2	AP router	RJ-45 Cable to C1	X							

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded,1.8m
2.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	iPod	Apple	A1199	FCC DoC	Shielded, 1.0m	N/A

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Version 4.0.171.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW ≥ 3 x RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

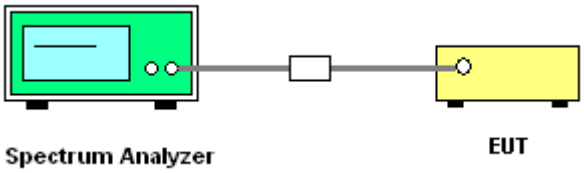

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

3.2.4 Test Setup

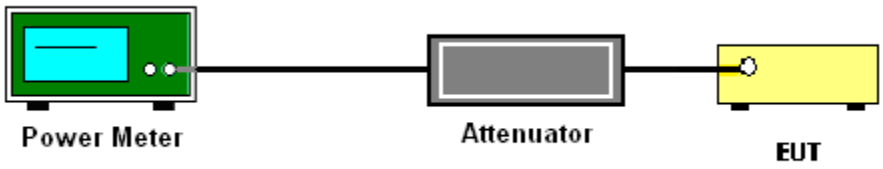

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500kHz.
- Set VBW ≥ 1 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
   Method (c): Measure and add 10 log(N_{ANT}) dB.
   With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity 10 log(N_{ANT}) dB is added to each spectrum value before comparing to the emission limit. The addition of 10 log(N_{ANT}) dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than 1/N_{ANT} th of the PSD limit.

3.3.4 Test Setup

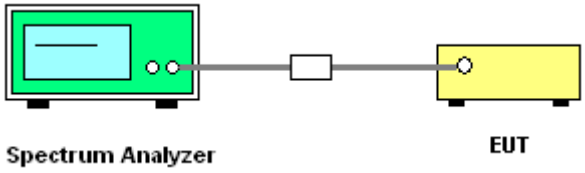

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies.

When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".

3.4.4 Test Setup

For radiated emissions below 30MHz

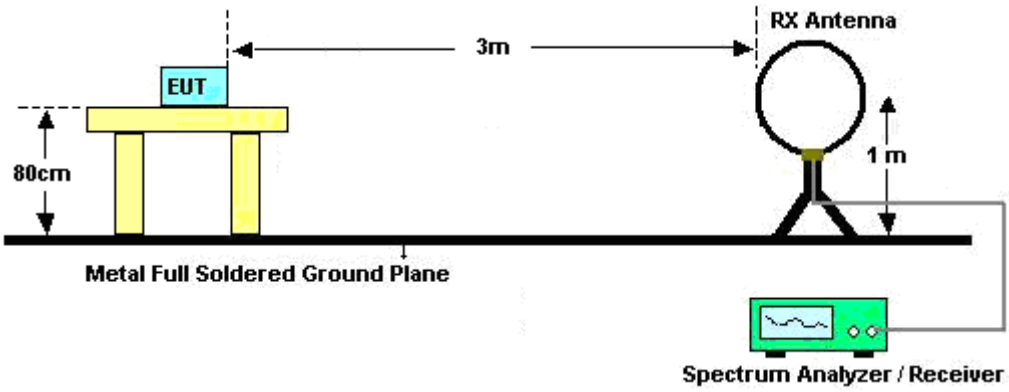

For radiated emissions from 30MHz to 1GHz

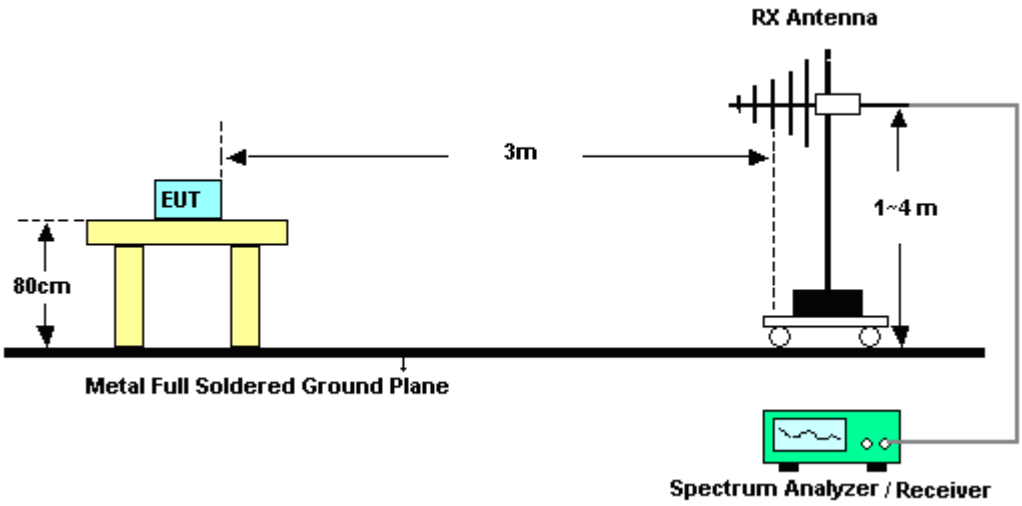

For radiated test from 1GHz to 18GHz

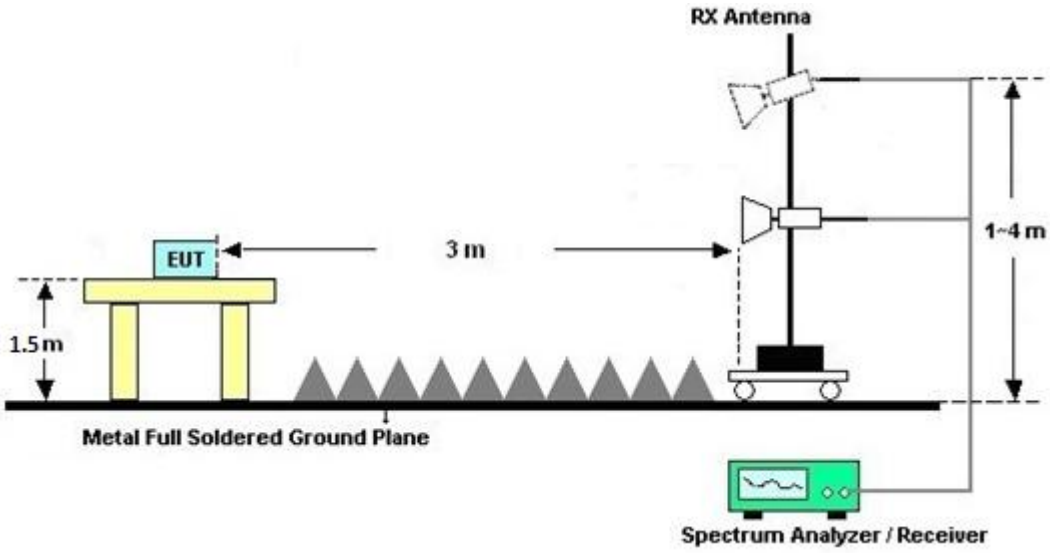

For radiated test above 18GHz

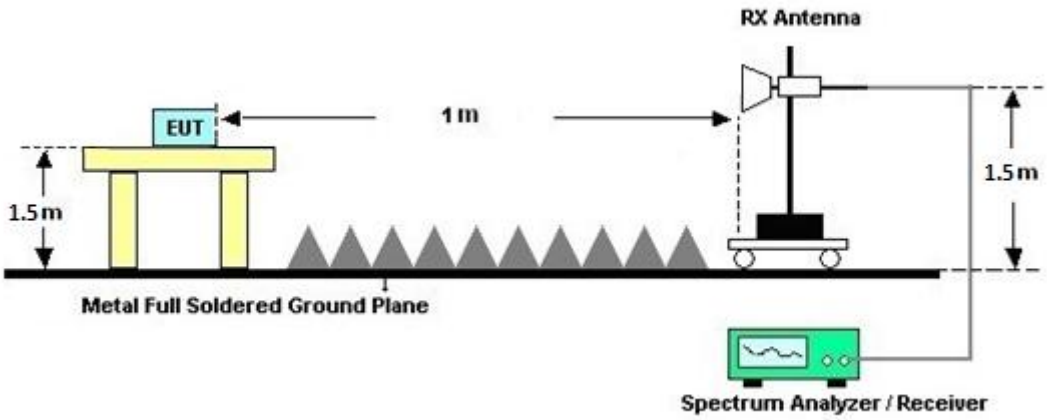

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

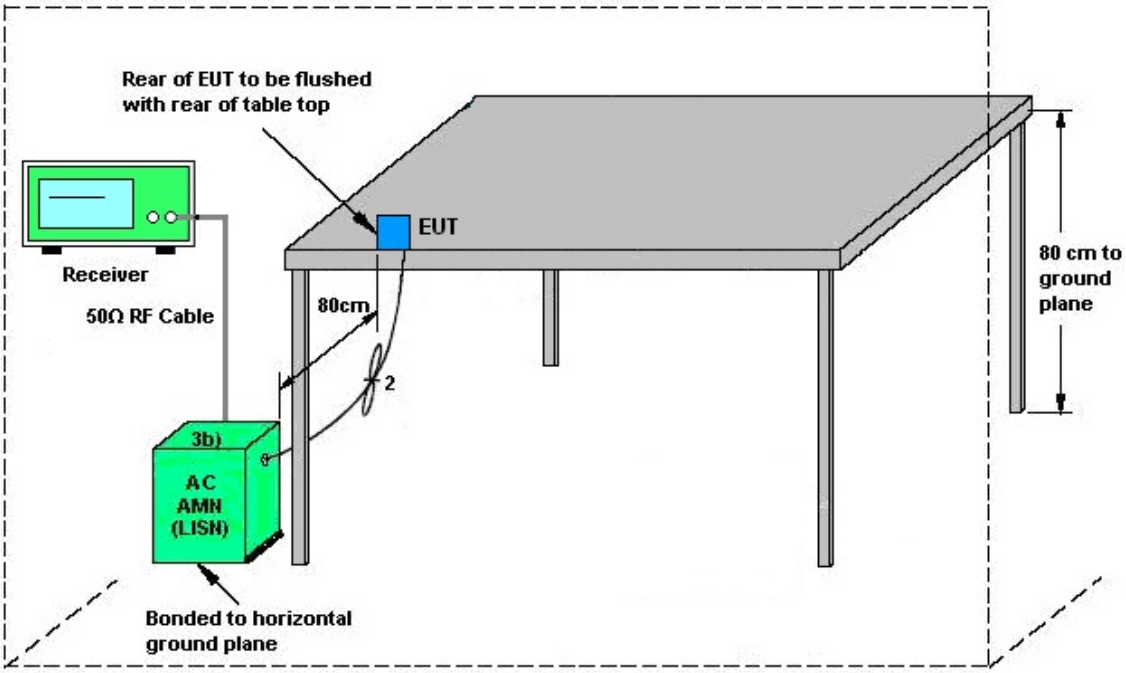

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	KV2D06A18ES	1GHz-18GHz	Nov. 05, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Jul. 01, 2026	Radiation (03CH17-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Nov. 25, 2026	Radiation (03CH17-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Dec. 10, 2026	Radiation (03CH17-HY)
Amplifier	EMCI	EMC118A45SE	980791	1GHz-18GHz	Nov. 05, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 25, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Aug. 24, 2026	Radiation (03CH17-HY)
Amplifier	SONOMA	310N	432035	9kHz ~ 1GHz	Nov. 05, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
EXA Signal Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Oct. 06, 2026	Radiation (03CH17-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 15, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Oct. 14, 2026	Radiation (03CH17-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/EMC101Y-KM-KM-1000/EMC101Y-KM-KM-9000	04613/2,240904,240915	30MHz~40GHz	Nov. 05, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Dec. 31, 2025 ~ Feb. 15, 2026	Mar. 30, 2026	Radiation (03CH17-HY)
Software	Audix	E3	RK-002469	N/A	N/A	Dec. 31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 15, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 15, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Dec. 15, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Dec. 15, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Dec. 15, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Dec. 15, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Dec. 15, 2025	Feb. 12, 2026	Conduction (CO07-HY)

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 12. 2025 ~ Feb. 03. 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Dec. 12. 2025 ~ Feb. 03. 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 12. 2025 ~ Feb. 03. 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 12. 2025 ~ Feb. 03. 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 12. 2025 ~ Feb. 03. 2026	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.5 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.7 dB

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.6 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.1 dB

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/12/12~2026/2/3	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	149	5745	17.69	17.31	30.94	25.93	16.49	16.35	0.5	Pass
11a	6Mbps	2	157	5785	17.51	17.19	24.80	23.92	16.55	16.48	0.5	Pass
11a	6Mbps	2	165	5825	17.58	17.23	25.20	23.84	16.46	16.43	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	19.51	19.71	22.62	30.00		0.90		Pass
11a	6Mbps	2	157	5785	19.56	19.72	22.65	30.00		0.90		Pass
11a	6Mbps	2	165	5825	19.37	19.44	22.42	30.00		0.90		Pass
HT20	MCS0	2	149	5745	19.02	19.11	22.08	30.00		0.90		Pass
HT20	MCS0	2	157	5785	18.67	18.76	21.73	30.00		0.90		Pass
HT20	MCS0	2	165	5825	18.98	19.01	22.01	30.00		0.90		Pass
HT40	MCS0	2	151	5755	18.58	18.69	21.65	30.00		0.90		Pass
HT40	MCS0	2	159	5795	18.57	18.77	21.68	30.00		0.90		Pass
VHT20	MCS0	2	149	5745	18.79	19.06	21.94	30.00		0.90		Pass
VHT20	MCS0	2	157	5785	18.56	18.67	21.63	30.00		0.90		Pass
VHT20	MCS0	2	165	5825	18.92	18.93	21.94	30.00		0.90		Pass
VHT40	MCS0	2	151	5755	18.55	18.66	21.62	30.00		0.90		Pass
VHT40	MCS0	2	159	5795	18.58	18.76	21.68	30.00		0.90		Pass
VHT80	MCS0	2	155	5775	18.58	18.69	21.65	30.00		0.90		Pass

Report Number : FR5N0610-01F

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	0.04	0.04	4.50	4.86	7.87	30.00		3.40		Pass
11a	6Mbps	2	157	5785	0.04	0.04	4.64	4.75	7.76	30.00		3.40		Pass
11a	6Mbps	2	165	5825	0.04	0.04	4.43	4.59	7.60	30.00		3.40		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	18.95	19.07	22.02	30.00		0.90		Pass
HE20	MCS0	2	149	5745	26/0	9.26	9.21	12.25	30.00		0.90		Pass
HE20	MCS0	2	149	5745	52/37	12.05	11.92	15.00	30.00		0.90		Pass
HE20	MCS0	2	149	5745	106/53	15.38	15.23	18.32	30.00		0.90		Pass
HE20	MCS0	2	157	5785	Full	18.89	18.96	21.94	30.00		0.90		Pass
HE20	MCS0	2	157	5785	26/4	9.32	8.97	12.16	30.00		0.90		Pass
HE20	MCS0	2	157	5785	52/38	11.97	11.42	14.71	30.00		0.90		Pass
HE20	MCS0	2	157	5785	106/53	15.09	14.88	18.00	30.00		0.90		Pass
HE20	MCS0	2	165	5825	Full	18.76	18.89	21.84	30.00		0.90		Pass
HE20	MCS0	2	165	5825	26/8	9.19	8.85	12.03	30.00		0.90		Pass
HE20	MCS0	2	165	5825	52/40	12.15	11.68	14.93	30.00		0.90		Pass
HE20	MCS0	2	165	5825	106/54	15.21	15.18	18.21	30.00		0.90		Pass
HE40	MCS0	2	151	5755	Full	18.58	18.72	21.66	30.00		0.90		Pass
HE40	MCS0	2	151	5755	242/61	14.97	14.75	17.87	30.00		0.90		Pass
HE40	MCS0	2	159	5795	Full	18.58	18.77	21.69	30.00		0.90		Pass
HE40	MCS0	2	159	5795	242/62	14.62	14.33	17.49	30.00		0.90		Pass
HE80	MCS0	2	155	5775	Full	18.56	18.61	21.60	30.00		0.90		Pass
HE80	MCS0	2	155	5775	484/65	14.97	14.64	17.82	30.00		0.90		Pass
HE80	MCS0	2	155	5775	484/66	14.74	14.41	17.59	30.00		0.90		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	0.00	0.00	2.86	3.16	6.17	30.00		3.40		Pass
HE20	MCS0	2	149	5745	26/0	0.02	0.02	2.88	2.84	5.89	30.00		3.40		Pass
HE20	MCS0	2	149	5745	52/37	0.02	0.02	3.02	2.94	6.03	30.00		3.40		Pass
HE20	MCS0	2	149	5745	106/53	0.03	0.03	2.76	2.76	5.77	30.00		3.40		Pass
HE20	MCS0	2	157	5785	Full	0.00	0.00	3.46	3.63	6.64	30.00		3.40		Pass
HE20	MCS0	2	157	5785	26/4	0.02	0.02	2.99	2.33	6.00	30.00		3.40		Pass
HE20	MCS0	2	157	5785	52/38	0.02	0.02	3.11	2.73	6.12	30.00		3.40		Pass
HE20	MCS0	2	157	5785	106/53	0.03	0.03	3.34	3.11	6.35	30.00		3.40		Pass
HE20	MCS0	2	165	5825	Full	0.00	0.00	3.35	3.46	6.47	30.00		3.40		Pass
HE20	MCS0	2	165	5825	26/8	0.02	0.02	3.44	2.88	6.45	30.00		3.40		Pass
HE20	MCS0	2	165	5825	52/40	0.02	0.02	3.42	2.87	6.43	30.00		3.40		Pass
HE20	MCS0	2	165	5825	106/54	0.03	0.03	3.42	3.39	6.43	30.00		3.40		Pass
HE40	MCS0	2	151	5755	Full	0.03	0.02	-0.31	0.08	3.09	30.00		3.40		Pass
HE40	MCS0	2	151	5755	242/61	0.03	0.03	0.00	-0.35	3.01	30.00		3.40		Pass
HE40	MCS0	2	159	5795	Full	0.03	0.02	-0.36	-0.08	2.93	30.00		3.40		Pass
HE40	MCS0	2	159	5795	242/62	0.03	0.03	-0.24	-0.30	2.77	30.00		3.40		Pass
HE80	MCS0	2	155	5775	Full	0.01	0.01	-3.20	-3.03	-0.02	30.00		3.40		Pass
HE80	MCS0	2	155	5775	484/65	0.06	0.06	-3.43	-3.92	-0.42	30.00		3.40		Pass
HE80	MCS0	2	155	5775	484/66	0.06	0.06	-3.28	-3.44	-0.27	30.00		3.40		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	149	5745	Full	19.18	19.21	23.57	23.98	18.88	18.90	0.5	Pass
EHT20	MCS0	2	157	5785	Full	19.18	19.22	24.30	23.58	18.92	18.90	0.5	Pass
EHT20	MCS0	2	165	5825	Full	19.25	19.25	24.46	24.03	18.94	18.94	0.5	Pass
EHT40	MCS0	2	151	5755	Full	38.30	38.29	46.40	44.51	37.96	37.60	0.5	Pass
EHT40	MCS0	2	159	5795	Full	38.30	38.27	45.30	44.91	37.85	37.68	0.5	Pass
EHT80	MCS0	2	155	5775	Full	77.90	77.76	91.97	88.96	76.98	76.90	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
EHT20	MCS0	2	149	5745	Full	19.09	19.21	22.16	30.00		0.90		Pass
EHT20	MCS0	2	149	5745	26/0	9.41	9.37	12.40	30.00		0.90		Pass
EHT20	MCS0	2	149	5745	52/37	12.28	12.11	15.21	30.00		0.90		Pass
EHT20	MCS0	2	149	5745	106/53	15.54	15.77	18.67	30.00		0.90		Pass
EHT20	MCS0	2	149	5745	52T+26T/70	14.14	14.05	17.11	30.00		0.90		Pass
EHT20	MCS0	2	149	5745	106T+26T/82	16.56	16.41	19.50	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	Full	18.92	19.01	21.98	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	26/4	9.58	9.04	12.33	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	52/38	12.13	11.67	14.92	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	106/53	15.26	15.08	18.18	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	52T+26T/71	14.08	13.87	16.99	30.00		0.90		Pass
EHT20	MCS0	2	157	5785	106T+26T/82	15.98	16.08	19.04	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	Full	19.04	19.07	22.07	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	26/8	9.32	9.04	12.19	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	52/40	12.35	11.75	15.07	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	106/54	15.41	15.32	18.38	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	52T+26T/72	14.06	13.65	16.87	30.00		0.90		Pass
EHT20	MCS0	2	165	5825	106T+26T/83	16.53	16.28	19.42	30.00		0.90		Pass
EHT40	MCS0	2	151	5755	Full	18.67	18.82	21.76	30.00		0.90		Pass
EHT40	MCS0	2	151	5755	242/61	15.01	14.83	17.93	30.00		0.90		Pass
EHT40	MCS0	2	159	5795	Full	18.64	18.94	21.80	30.00		0.90		Pass
EHT40	MCS0	2	159	5795	242/62	14.78	14.47	17.64	30.00		0.90		Pass
EHT80	MCS0	2	155	5775	Full	18.62	18.73	21.69	30.00		0.90		Pass
EHT80	MCS0	2	155	5775	484/65	15.01	14.82	17.93	30.00		0.90		Pass
EHT80	MCS0	2	155	5775	484/66	14.79	14.59	17.70	30.00		0.90		Pass
EHT80	MCS0	2	155	5775	Puncture 20/4	16.57	16.63	19.61	30.00		0.90		Pass
EHT80	MCS0	2	155	5775	Puncture 20/1	16.41	16.53	19.48	30.00		0.90		Pass

Report Number : FR5N0610-01F

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
EHT20	MCS0	2	149	5745	Full	0.02	0.02	3.59	3.90	6.91	30.00		3.40		Pass
EHT20	MCS0	2	149	5745	26/0	0.02	0.02	3.53	3.43	6.54	30.00		3.40		Pass
EHT20	MCS0	2	149	5745	52/37	0.02	0.02	3.50	3.26	6.51	30.00		3.40		Pass
EHT20	MCS0	2	149	5745	106/53	0.02	0.02	3.69	3.77	6.78	30.00		3.40		Pass
EHT20	MCS0	2	149	5745	52T+26T/70	0.02	0.02	3.41	3.34	6.42	30.00		3.40		Pass
EHT20	MCS0	2	149	5745	106T+26T/82	0.02	0.02	3.73	3.69	6.74	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	Full	0.02	0.02	3.58	3.66	6.67	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	26/4	0.02	0.02	3.57	2.88	6.58	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	52/38	0.02	0.02	3.16	2.63	6.17	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	106/53	0.02	0.02	3.29	3.08	6.30	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	52T+26T/71	0.02	0.02	3.37	3.09	6.38	30.00		3.40		Pass
EHT20	MCS0	2	157	5785	106T+26T/82	0.02	0.02	3.27	3.41	6.42	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	Full	0.02	0.02	3.55	3.61	6.62	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	26/8	0.02	0.02	3.50	3.12	6.51	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	52/40	0.02	0.02	3.49	3.11	6.50	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	106/54	0.02	0.02	3.33	3.49	6.50	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	52T+26T/72	0.02	0.02	3.31	2.84	6.32	30.00		3.40		Pass
EHT20	MCS0	2	165	5825	106T+26T/83	0.02	0.02	3.55	3.44	6.56	30.00		3.40		Pass
EHT40	MCS0	2	151	5755	Full	0.02	0.02	-0.23	0.10	3.11	30.00		3.40		Pass
EHT40	MCS0	2	151	5755	242/61	0.03	0.03	-0.06	-0.34	2.95	30.00		3.40		Pass
EHT40	MCS0	2	159	5795	Full	0.02	0.02	-0.38	-0.01	3.00	30.00		3.40		Pass
EHT40	MCS0	2	159	5795	242/62	0.03	0.03	-0.36	-0.40	2.65	30.00		3.40		Pass
EHT80	MCS0	2	155	5775	Full	0.02	0.02	-3.13	-2.97	0.04	30.00		3.40		Pass
EHT80	MCS0	2	155	5775	484/65	0.06	0.06	-3.41	-3.82	-0.40	30.00		3.40		Pass
EHT80	MCS0	2	155	5775	484/66	0.06	0.06	-3.41	-3.50	-0.40	30.00		3.40		Pass
EHT80	MCS0	2	155	5775	Puncture 20/4	0.06	0.06	-3.31	-3.51	-0.30	30.00		3.40		Pass
EHT80	MCS0	2	155	5775	Puncture 20/1	0.06	0.06	-3.38	-3.46	-0.37	30.00		3.40		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

MIMO <Ant. 6+7>

Test Result of 6dB and 26dB and 99% Occupied Bandwidth

<802.11a>

6dB Bandwidth

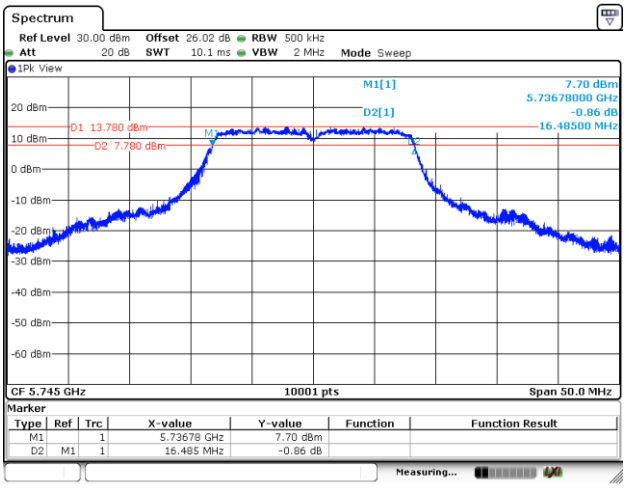

26dB Bandwidth

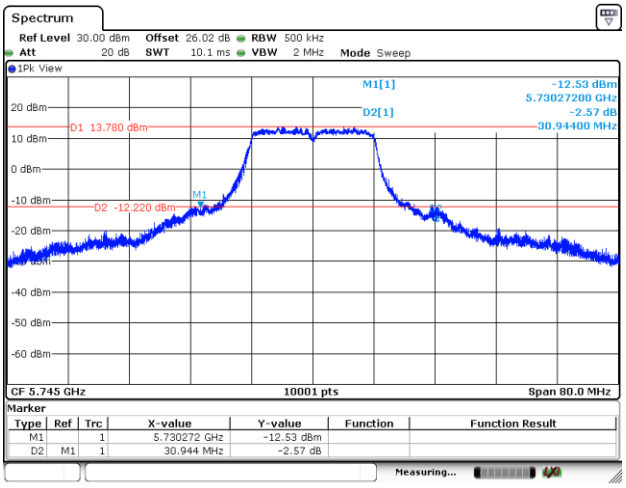

99% Occupied Bandwidth

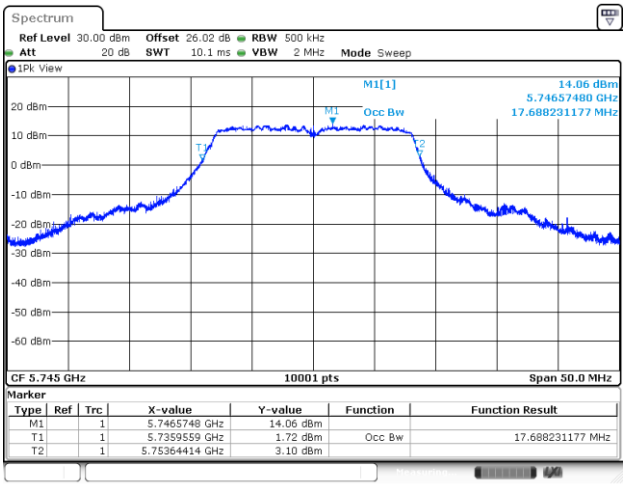

N/A

<802.11be EHT20>

6dB Bandwidth	26dB Bandwidth
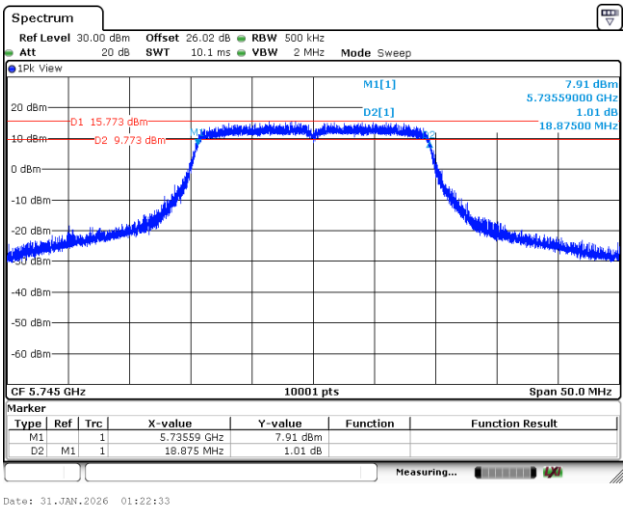	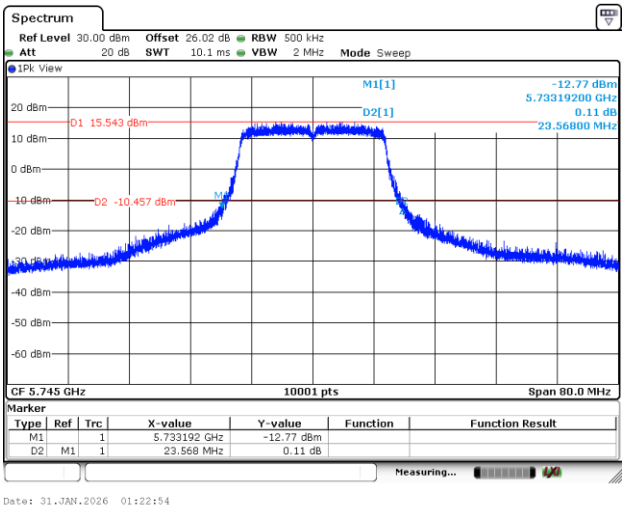
99% Occupied Bandwidth	**N/A**
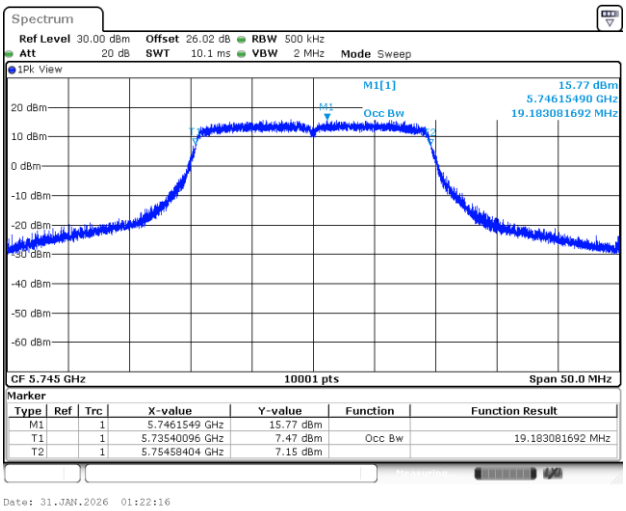	

<802.11be EHT40>

6dB Bandwidth	26dB Bandwidth
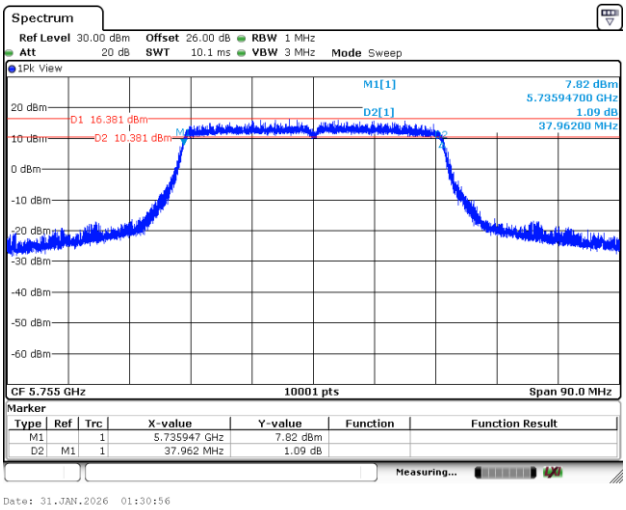	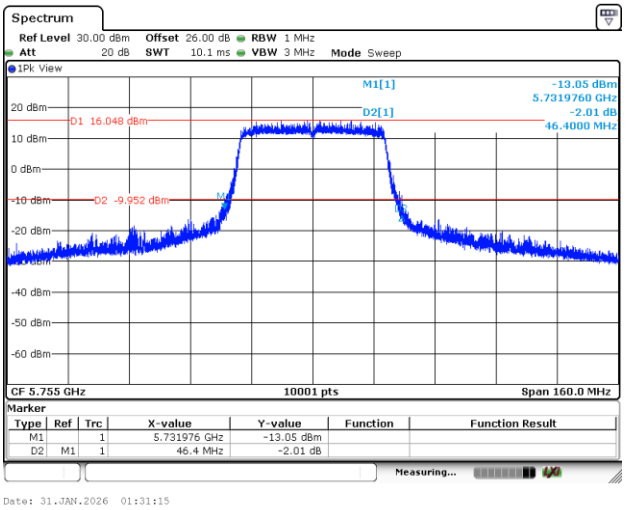
99% Occupied Bandwidth	**N/A**
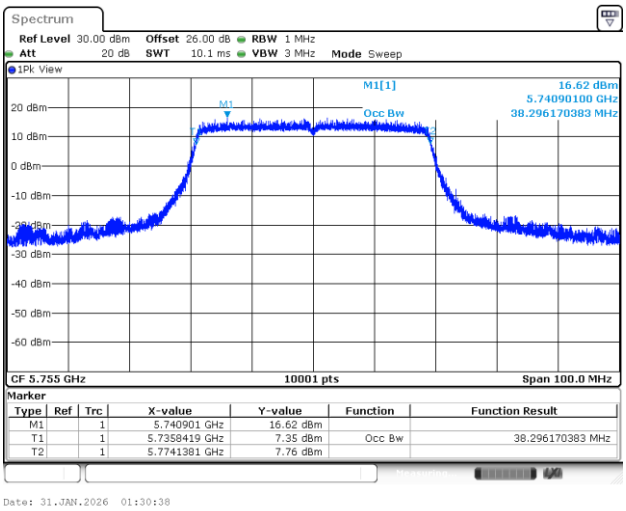	

<802.11be EHT80>

6dB Bandwidth	26dB Bandwidth
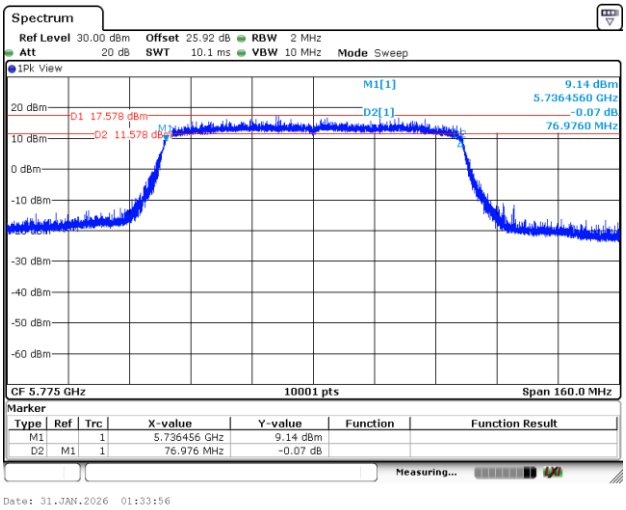	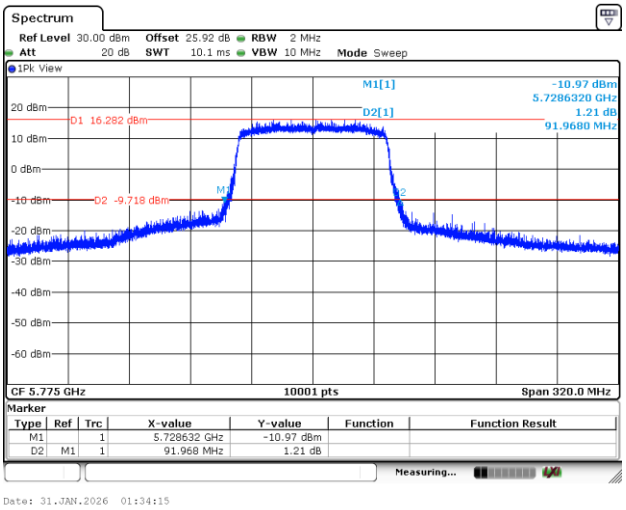
99% Occupied Bandwidth	**N/A**
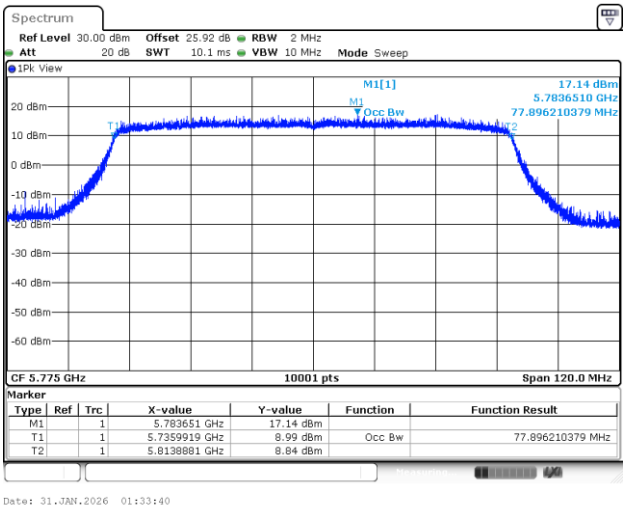	

Test Result of Power Spectral Density

<802.11a>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
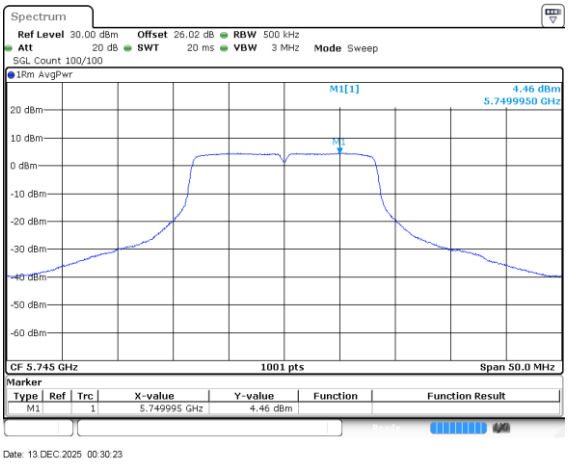	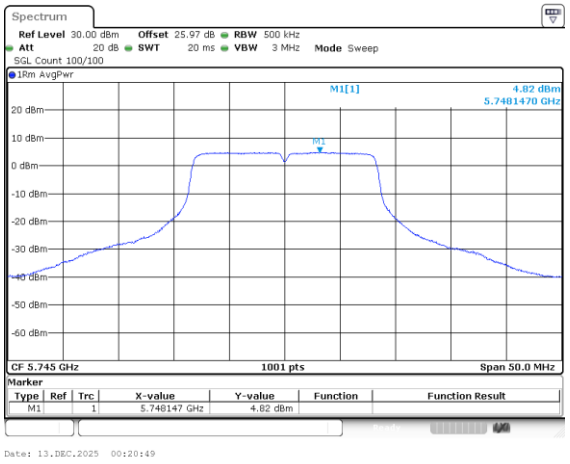

<802.11ax HE20>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
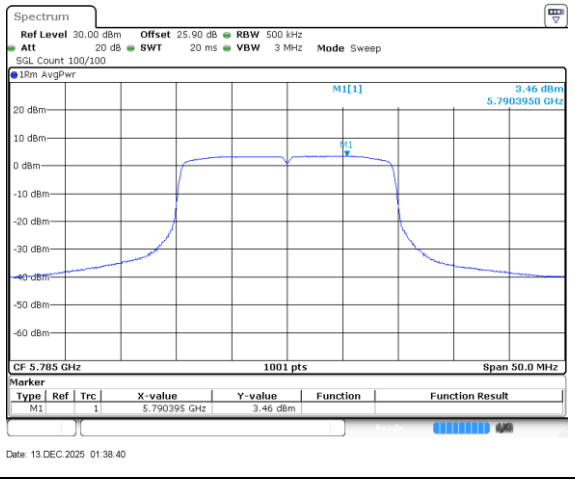	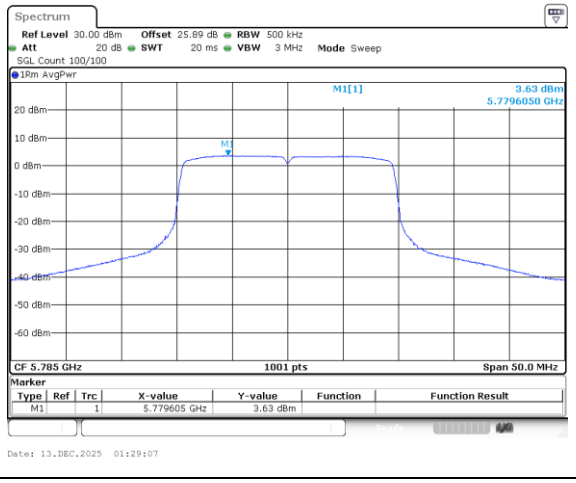

<802.11ax HE40>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
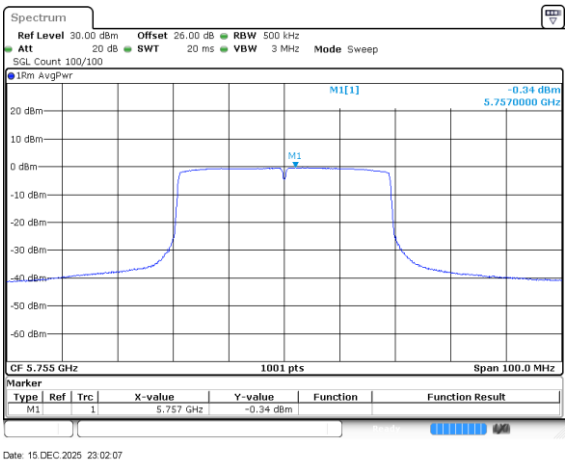	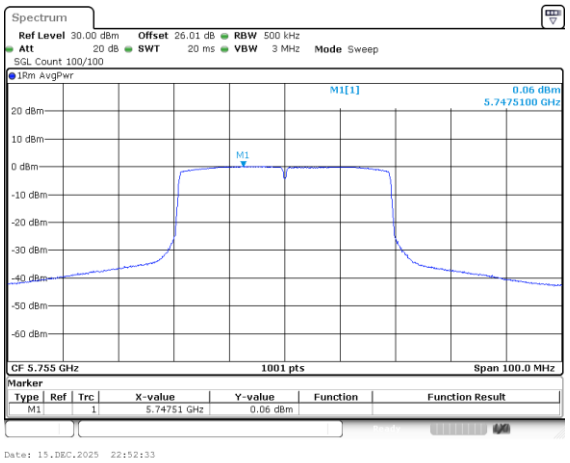

<802.11ax HE80>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
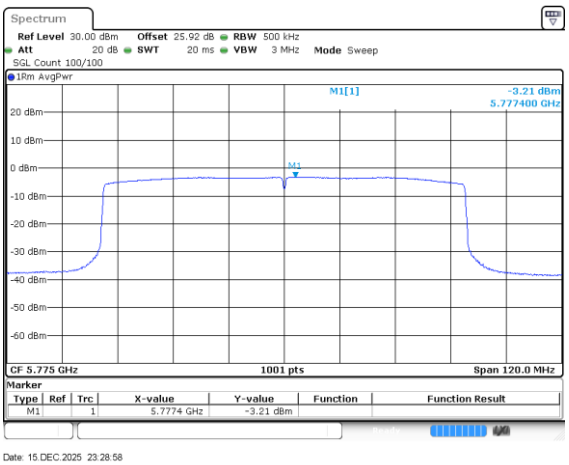	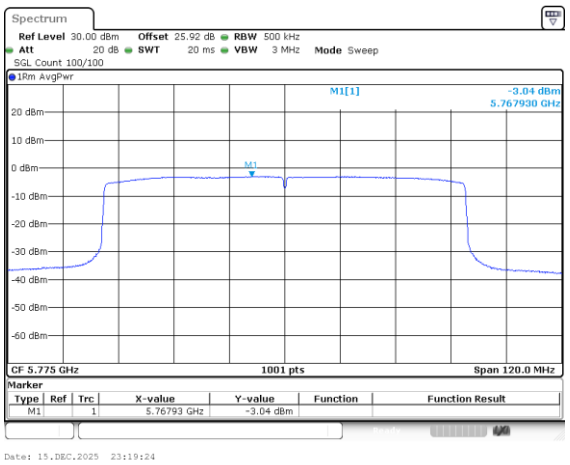

<802.11be EHT20>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	Ant. 7
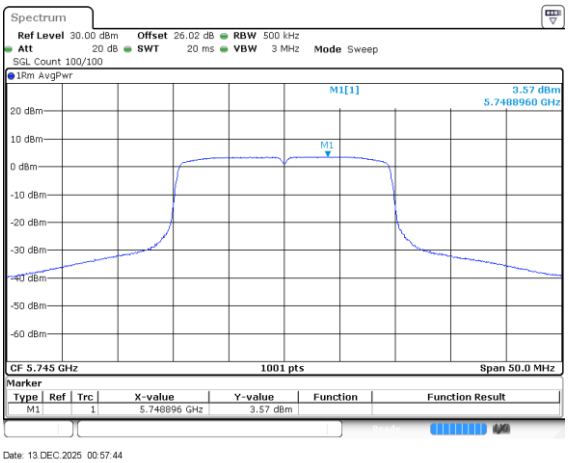	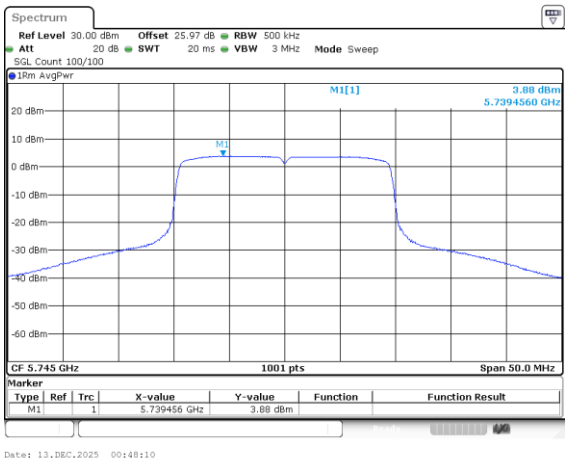

<802.11be EHT40>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	Ant. 7
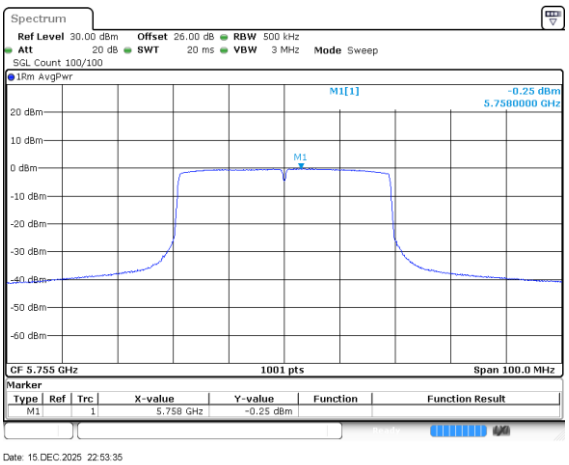	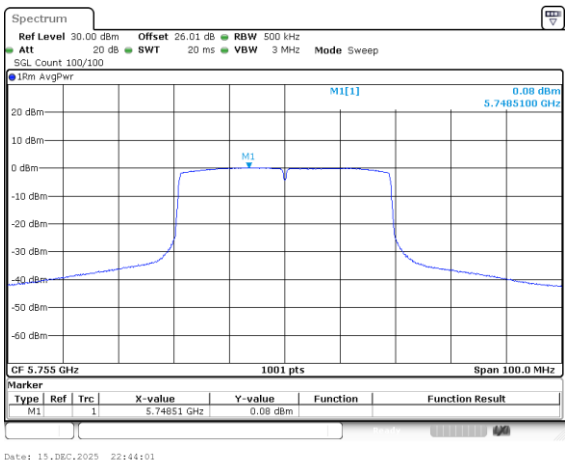

<802.11be EHT80>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
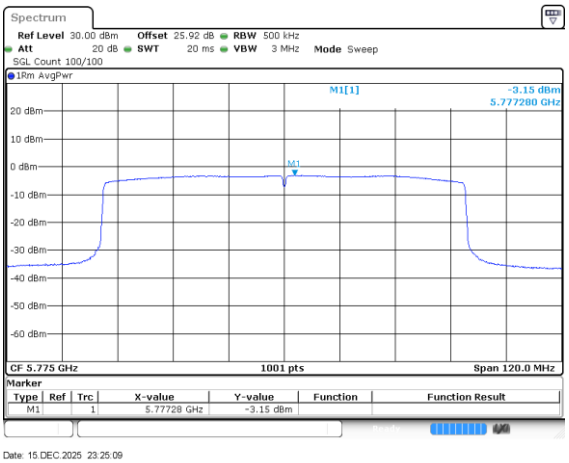	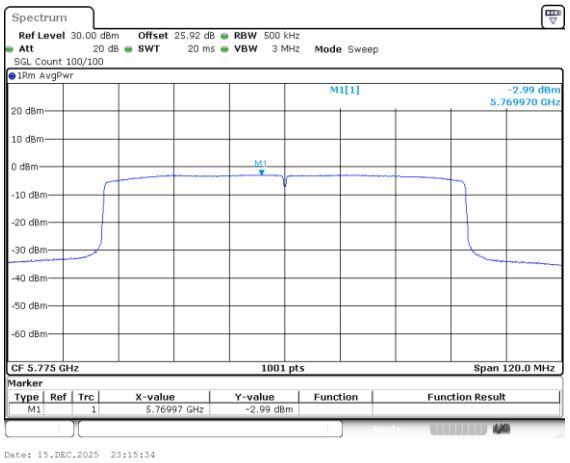

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	**Temperature :**	17.06 ~ 22.3℃
		Relative Humidity :	45.7 ~ 56.1%

EUT Information

Report NO :	5N0610-01
Test Mode :	Mode 1
Test Voltage :	Power from system
Phase :	Line

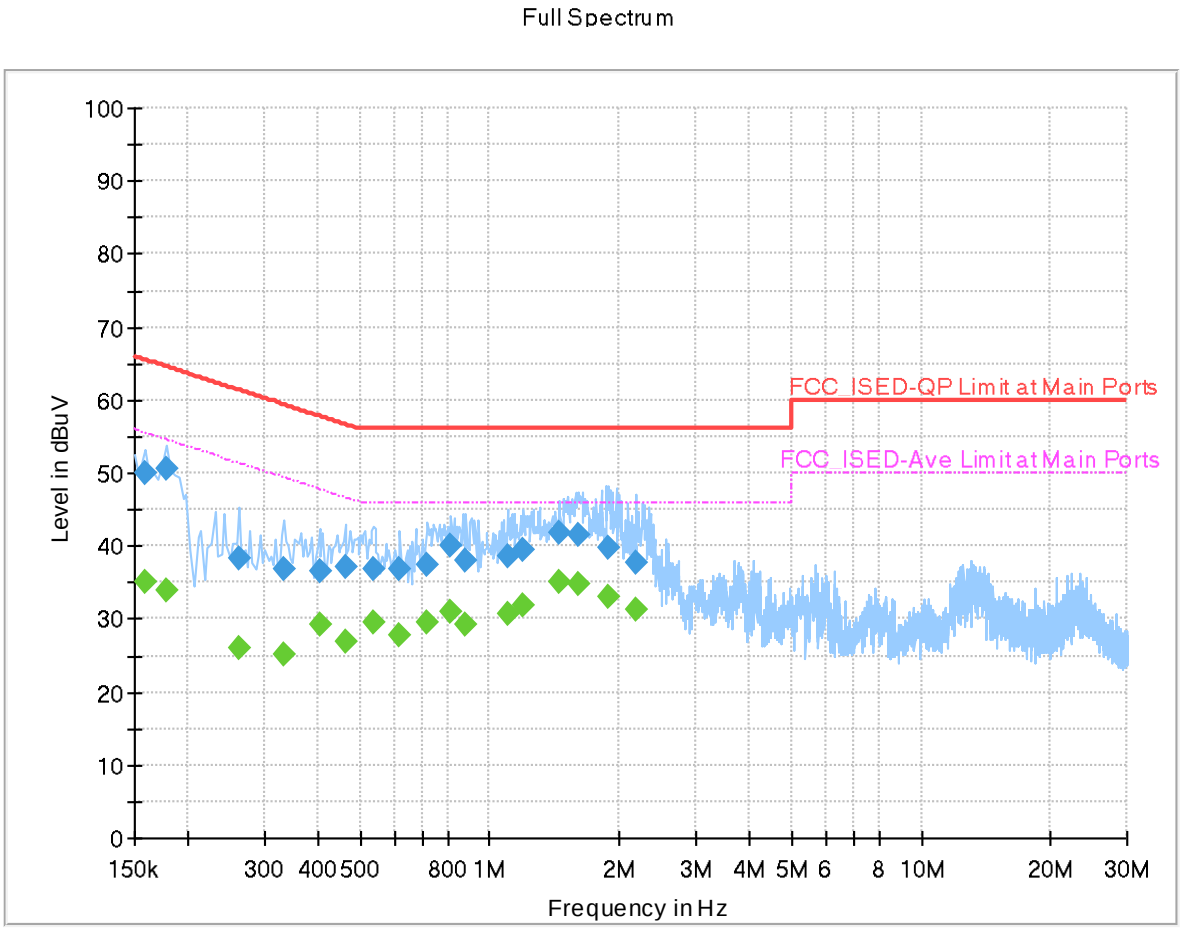

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	35.01	55.57	20.56	L1	OFF	19.9
0.158000	50.05	---	65.57	15.52	L1	OFF	19.9
0.178000	---	33.93	54.58	20.65	L1	OFF	19.9
0.178000	50.61	---	64.58	13.97	L1	OFF	19.9
0.262000	---	25.89	51.37	25.48	L1	OFF	19.9
0.262000	38.31	---	61.37	23.06	L1	OFF	19.9
0.334000	---	25.02	49.35	24.33	L1	OFF	19.9
0.334000	36.71	---	59.35	22.64	L1	OFF	19.9
0.402000	---	29.10	47.81	18.71	L1	OFF	19.9
0.402000	36.65	---	57.81	21.16	L1	OFF	19.9
0.462000	---	26.95	46.66	19.71	L1	OFF	19.9
0.462000	37.01	---	56.66	19.65	L1	OFF	19.9
0.538000	---	29.46	46.00	16.54	L1	OFF	19.9
0.538000	36.89	---	56.00	19.11	L1	OFF	19.9
0.618000	---	27.91	46.00	18.09	L1	OFF	19.9
0.618000	36.70	---	56.00	19.30	L1	OFF	19.9
0.718000	---	29.56	46.00	16.44	L1	OFF	19.9
0.718000	37.54	---	56.00	18.46	L1	OFF	19.9
0.814000	---	30.91	46.00	15.09	L1	OFF	19.9

0.814000	40.05	---	56.00	15.95	L1	OFF	19.9
0.882000	---	29.34	46.00	16.66	L1	OFF	19.9
0.882000	37.88	---	56.00	18.12	L1	OFF	19.9
1.102000	---	30.79	46.00	15.21	L1	OFF	19.9
1.102000	38.71	---	56.00	17.29	L1	OFF	19.9
1.198000	---	31.86	46.00	14.14	L1	OFF	19.9
1.198000	39.34	---	56.00	16.66	L1	OFF	19.9
1.446000	---	35.02	46.00	10.98	L1	OFF	19.9
1.446000	41.87	---	56.00	14.13	L1	OFF	19.9
1.602000	---	34.84	46.00	11.16	L1	OFF	19.9
1.602000	41.48	---	56.00	14.52	L1	OFF	19.9
1.874000	---	33.10	46.00	12.90	L1	OFF	20.0
1.874000	39.85	---	56.00	16.15	L1	OFF	20.0
2.190000	---	31.16	46.00	14.84	L1	OFF	20.0
2.190000	37.75	---	56.00	18.25	L1	OFF	20.0

EUT Information

Report NO :	5N0610-01
Test Mode :	Mode 1
Test Voltage :	Power from system
Phase :	Neutral

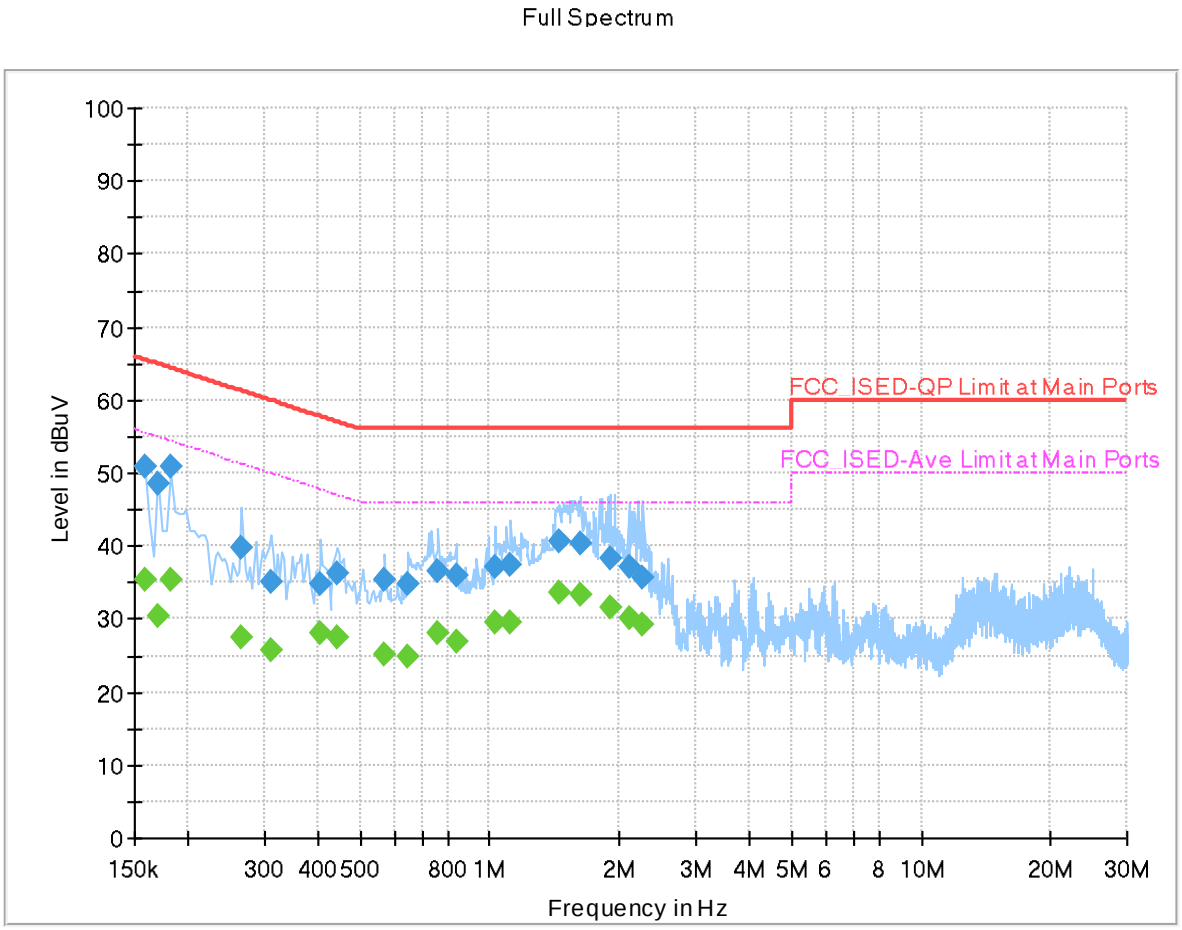

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	35.34	55.57	20.23	N	OFF	19.9
0.158000	50.92	---	65.57	14.65	N	OFF	19.9
0.170000	---	30.48	54.96	24.48	N	OFF	19.9
0.170000	48.40	---	64.96	16.56	N	OFF	19.9
0.182000	---	35.50	54.39	18.89	N	OFF	19.9
0.182000	50.91	---	64.39	13.48	N	OFF	19.9
0.266000	---	27.60	51.24	23.64	N	OFF	19.9
0.266000	39.69	---	61.24	21.55	N	OFF	19.9
0.310000	---	25.66	49.97	24.31	N	OFF	19.9
0.310000	35.11	---	59.97	24.86	N	OFF	19.9
0.406000	---	28.01	47.73	19.72	N	OFF	19.9
0.406000	34.90	---	57.73	22.83	N	OFF	19.9
0.442000	---	27.51	47.02	19.51	N	OFF	19.9
0.442000	36.33	---	57.02	20.69	N	OFF	19.9
0.570000	---	25.17	46.00	20.83	N	OFF	19.9
0.570000	35.31	---	56.00	20.69	N	OFF	19.9
0.646000	---	24.93	46.00	21.07	N	OFF	19.9
0.646000	34.79	---	56.00	21.21	N	OFF	19.9
0.758000	---	28.06	46.00	17.94	N	OFF	19.9

0.758000	36.48	---	56.00	19.52	N	OFF	19.9
0.834000	---	26.86	46.00	19.14	N	OFF	19.9
0.834000	35.87	---	56.00	20.13	N	OFF	19.9
1.030000	---	29.42	46.00	16.58	N	OFF	19.9
1.030000	37.14	---	56.00	18.86	N	OFF	19.9
1.118000	---	29.58	46.00	16.42	N	OFF	19.9
1.118000	37.34	---	56.00	18.66	N	OFF	19.9
1.446000	---	33.74	46.00	12.26	N	OFF	19.9
1.446000	40.63	---	56.00	15.37	N	OFF	19.9
1.622000	---	33.30	46.00	12.70	N	OFF	20.0
1.622000	40.46	---	56.00	15.54	N	OFF	20.0
1.898000	---	31.51	46.00	14.49	N	OFF	20.0
1.898000	38.24	---	56.00	17.76	N	OFF	20.0
2.098000	---	30.26	46.00	15.74	N	OFF	20.0
2.098000	37.06	---	56.00	18.94	N	OFF	20.0
2.270000	---	29.30	46.00	16.70	N	OFF	20.0
2.270000	35.74	---	56.00	20.26	N	OFF	20.0

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou , Lucifer Jiang	**Temperature :**	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

-L	**Low channel location**
-R	**High channel location**

C2.1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 51	U-NII-3	5.725-5.85	6+7	802.11a	149	5745	6Mbps	-	-
Mode 52	U-NII-3	5.725-5.85	6+7	802.11a	157	5785	6Mbps	-	-
Mode 53	U-NII-3	5.725-5.85	6+7	802.11a	165	5825	6Mbps	-	-
Mode 54	U-NII-3	5.725-5.85	6+7	802.11be EHT20	149	5745	MCS0	Full RU	-
Mode 55	U-NII-3	5.725-5.85	6+7	802.11be EHT20	149	5745	MCS0	Partial_106/53RU	-
Mode 56	U-NII-3	5.725-5.85	6+7	802.11be EHT20	157	5785	MCS0	Full RU	-
Mode 57	U-NII-3	5.725-5.85	6+7	802.11be EHT20	165	5825	MCS0	Full RU	-
Mode 58	U-NII-3	5.725-5.85	6+7	802.11be EHT20	165	5825	MCS0	Partial_106/54RU	-
Mode 59	U-NII-3	5.725-5.85	6+7	802.11be EHT40	151	5755	MCS0	Full RU	-
Mode 60	U-NII-3	5.725-5.85	6+7	802.11be EHT40	151	5755	MCS0	Partial_242/61RU	-
Mode 61	U-NII-3	5.725-5.85	6+7	802.11be EHT40	159	5795	MCS0	Full RU	-
Mode 62	U-NII-3	5.725-5.85	6+7	802.11be EHT40	159	5795	MCS0	Partial_242/62RU	-
Mode 63	U-NII-3	5.725-5.85	6+7	802.11be EHT80	155	5775	MCS0	Full RU	-
Mode 64	U-NII-3	5.725-5.85	6+7	802.11be EHT80	155	5775	MCS0	Partial_484/65RU	-
Mode 65	U-NII-3	5.725-5.85	6+7	802.11be EHT80	155	5775	MCS0	Partial_484/66RU	-
Mode 143	U-NII-3	5.725-5.85	6+7	802.11be EHT80	155	5775	MCS0	20MHz Puncture Location 4	-
Mode 144	U-NII-3	5.725-5.85	6+7	802.11be EHT80	155	5775	MCS0	20MHz Puncture Location 1	-

C2.2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
51	802.11a	149	5649.74	56.09	68.20	-12.11	H	Peak	Pass	-	Band Edge
	802.11a	149	11490.00	41.90	54.00	-12.10	H	Avg.	Pass	-	Harmonic
52	802.11a	157	5943.07	52.46	68.20	-15.74	H	Peak	Pass	-	Band Edge
	802.11a	157	11570.00	42.58	54.00	-11.42	V	Avg.	Pass	-	Harmonic
53	802.11a	165	5949.50	53.31	68.20	-14.89	V	Peak	Pass	-	Band Edge
	802.11a	165	11650.00	42.99	54.00	-11.01	V	Avg.	Pass	-	Harmonic
54	802.11be EHT20	149	5641.91	52.84	68.20	-15.36	H	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	149	-	-	-	-	-	-	-	Full RU	Harmonic
55	802.11be EHT20	149	5637.12	53.33	68.20	-14.87	H	Peak	Pass	Partial_106/53RU	Band Edge
	802.11be EHT20	149	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
56	802.11be EHT20	157	5648.29	51.65	68.20	-16.55	H	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	157	11570.00	40.88	54.00	-13.12	V	Avg.	Pass	Full RU	Harmonic
57	802.11be EHT20	165	5934.63	54.02	68.20	-14.18	H	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	165	11650.00	43.83	54.00	-10.17	V	Avg.	Pass	Full RU	Harmonic
58	802.11be EHT20	165	5927.13	53.91	68.20	-14.29	H	Peak	Pass	Partial_106/54RU	Band Edge
	802.11be EHT20	165	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
59	802.11be EHT40	151	5635.34	58.82	68.20	-9.38	H	Peak	Pass	Full RU	Band Edge
	802.11be EHT40	151	11510.00	41.56	54.00	-12.44	H	Avg.	Pass	Full RU	Harmonic
60	802.11be EHT40	151	5639.84	57.98	68.20	-10.22	H	Peak	Pass	Partial_242/61RU	Band Edge
	802.11be EHT40	151	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
61	802.11be EHT40	159	5926.13	61.46	68.20	-6.74	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT40	159	17385.00	55.85	68.20	-12.35	H	Peak	Pass	Full RU	Harmonic
62	802.11be EHT40	159	5924.74	54.49	68.40	-13.91	V	Peak	Pass	Partial_242/62RU	Band Edge
	802.11be EHT40	159	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
63	802.11be EHT80	155	5632.73	62.53	68.20	-5.67	H	Peak	Pass	Full RU	Band Edge
	802.11be EHT80	155	17325.00	55.87	68.20	-12.33	V	Peak	Pass	Full RU	Harmonic
64	802.11be EHT80	155	5649.18	65.60	68.20	-2.60	V	Peak	Pass	Partial_484/65RU	Band Edge
	802.11be EHT80	155	-	-	-	-	-	-	-	Partial_484/65RU	Harmonic
65	802.11be EHT80	155	5921.83	65.89	70.54	-4.65	H	Peak	Pass	Partial_484/66RU	Band Edge
	802.11be EHT80	155	-	-	-	-	-	-	-	Partial_484/66RU	Harmonic
143	802.11be EHT80	155	5649.00	64.99	68.20	-3.21	H	Peak	Pass	20MHz Puncture Location 4	Band Edge
	802.11be EHT80	155	-	-	-	-	-	-	-	20MHz Puncture Location 4	Harmonic
144	802.11be EHT80	155	5936.35	55.37	68.20	-12.83	V	Peak	Pass	20MHz Puncture Location 1	Band Edge
	802.11be EHT80	155	-	-	-	-	-	-	-	20MHz Puncture Location 1	Harmonic

Mode	51
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	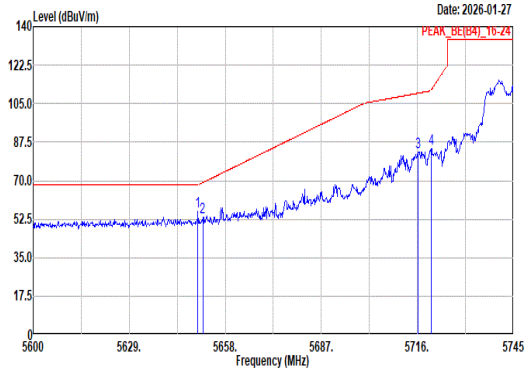 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.74 56.09 68.20 -12.11 47.59 33.30 13.27 38.07 0.00 200 39 Peak 2 5651.19 53.42 69.08 -15.66 44.92 33.31 13.26 38.07 0.00 200 39 Peak 3 5716.15 83.04 109.72 -26.68 74.20 33.80 13.09 38.05 0.00 200 39 Peak 4 5720.21 84.34 111.27 -26.93 75.51 33.80 13.08 38.05 0.00 200 39 Peak	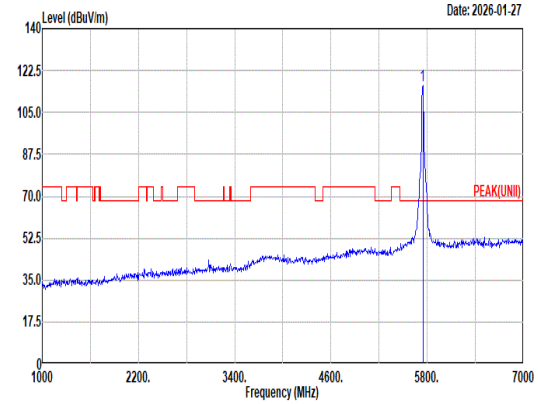 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 116.07 ------ ------ 107.32 33.80 12.99 38.04 0.00 200 39 Peak
Avg	Blank	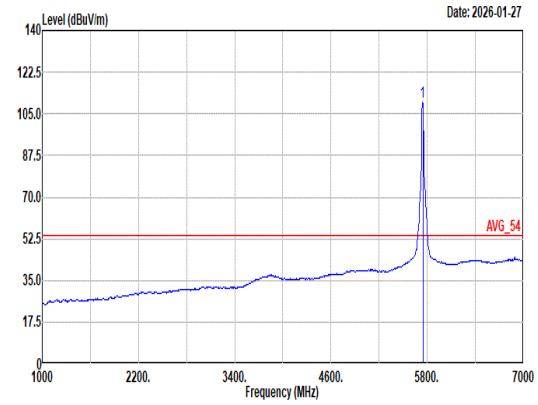 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.80 ------ ------ 101.03 33.80 13.02 38.05 0.00 200 39 Average

Mode	51
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	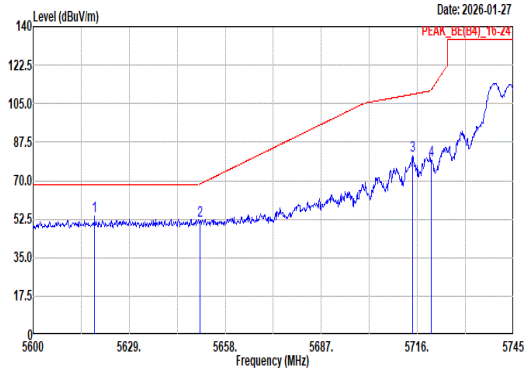 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5618.56 53.83 68.20 -14.37 45.51 33.05 13.35 38.08 0.00 225 352 Peak 2 5650.46 51.97 68.54 -16.57 43.48 33.30 13.26 38.07 0.00 225 352 Peak 3 5714.55 81.18 109.28 -28.10 72.34 33.80 13.09 38.05 0.00 225 352 Peak 4 5720.21 79.06 111.27 -32.21 70.23 33.80 13.08 38.05 0.00 225 352 Peak	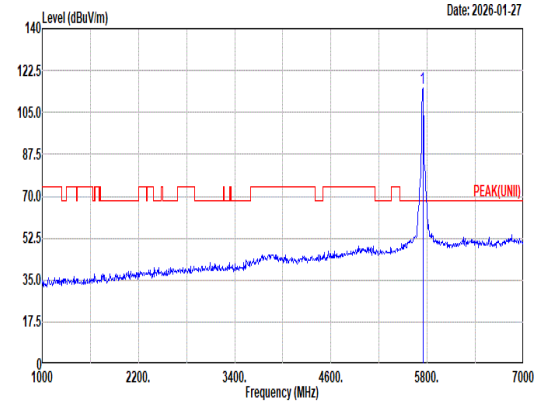 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 114.99 ------ ------ 106.23 33.80 13.01 38.05 0.00 225 352 Peak
Avg	Blank	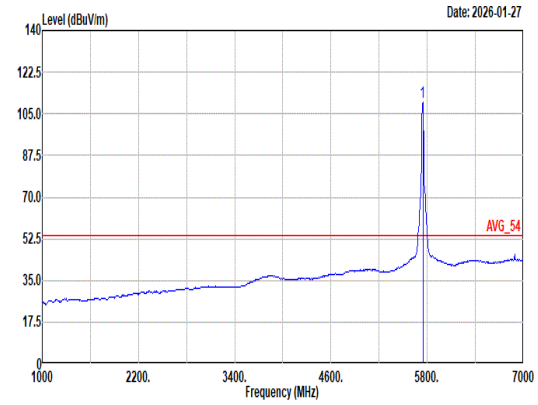 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.71 ------ ------ 100.96 33.80 12.99 38.04 0.00 225 352 Average

Mode	51	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	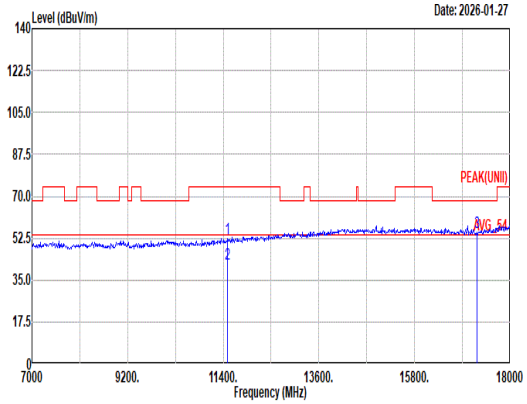 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 52.25 74.00 -21.75 36.73 38.58 19.10 42.75 0.59 -- -- Peak 2 11490.00 41.90 54.00 -12.10 26.38 38.58 19.10 42.75 0.59 -- -- Average 3 17235.00 54.84 68.20 -13.36 35.52 40.17 23.51 45.10 0.74 -- -- Peak	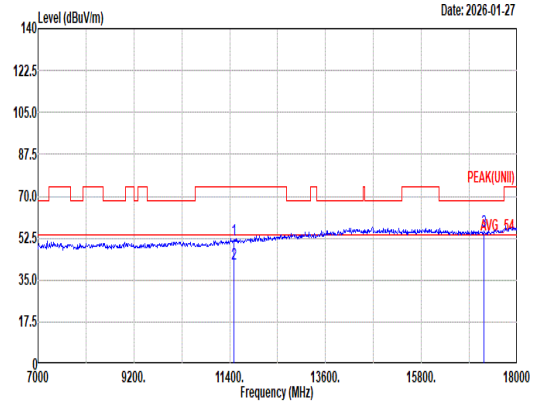 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 52.00 74.00 -22.00 36.48 38.58 19.10 42.75 0.59 -- -- Peak 2 11490.00 41.71 54.00 -12.29 26.19 38.58 19.10 42.75 0.59 -- -- Average 3 17235.00 55.67 68.20 -12.53 36.35 40.17 23.51 45.10 0.74 -- -- Peak

Mode	51	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	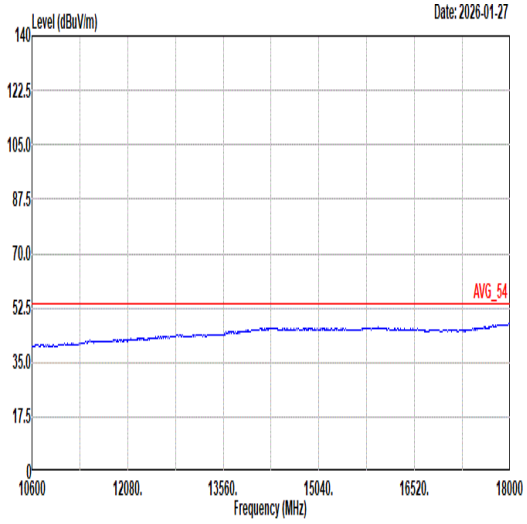 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	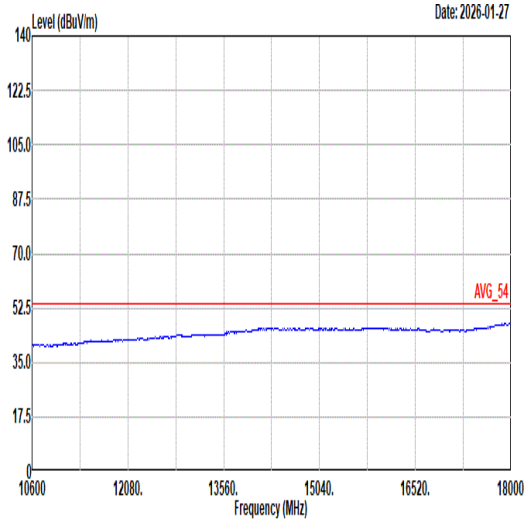 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	52
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	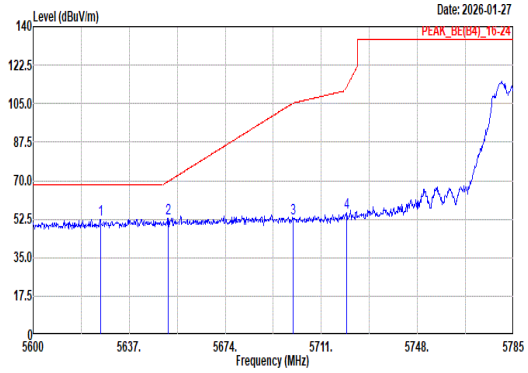 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.90 52.43 68.20 -15.77 44.07 33.11 13.33 38.08 0.00 214 43 Peak 2 5651.99 53.02 69.68 -16.66 44.51 33.32 13.26 38.07 0.00 214 43 Peak 3 5700.09 52.90 105.22 -52.32 44.03 33.80 13.13 38.06 0.00 214 43 Peak 4 5720.62 55.53 112.21 -56.68 46.71 33.80 13.07 38.05 0.00 214 43 Peak	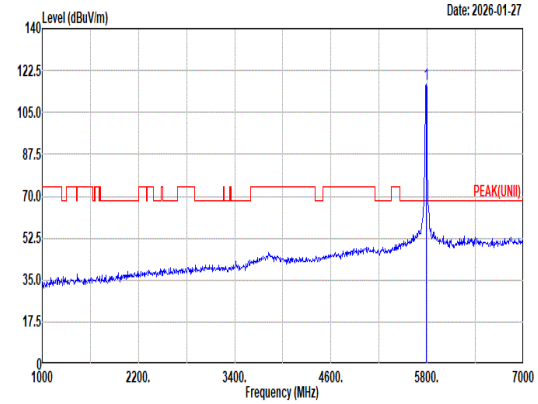 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 116.55 ------ ------ 107.90 33.80 12.89 38.04 0.00 214 43 Peak
Avg	Blank	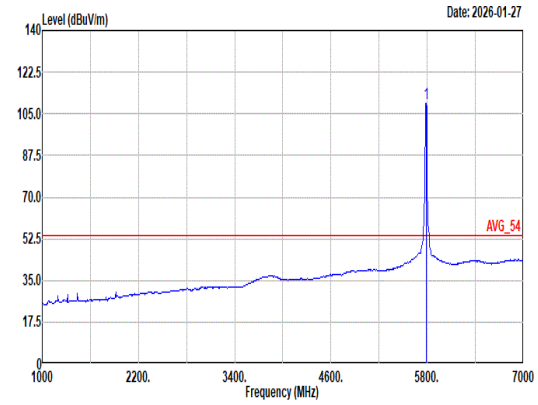 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 109.48 ------ ------ 100.81 33.80 12.91 38.04 0.00 214 43 Average

Mode	52	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	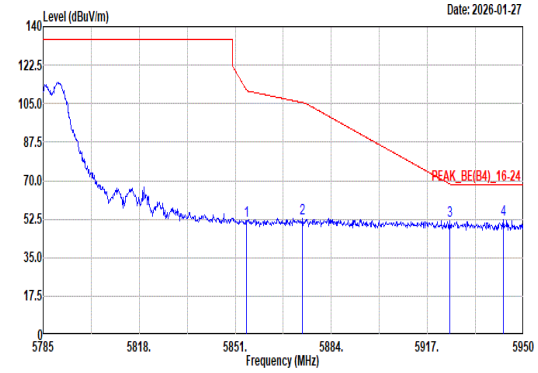 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 51.71 110.89 -59.18 42.91 33.71 13.11 38.02 0.00 214 43 Peak 2 5874.10 52.62 105.45 -52.83 43.68 33.75 13.20 38.01 0.00 214 43 Peak 3 5924.59 51.94 68.50 -16.56 42.76 33.75 13.43 38.00 0.00 214 43 Peak 4 5943.07 52.46 68.20 -15.74 43.22 33.71 13.52 37.99 0.00 214 43 Peak	Blank

Mode	52
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	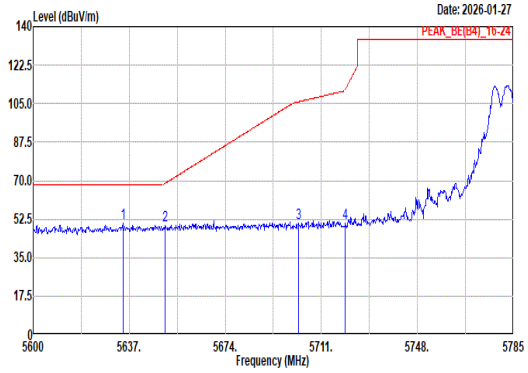 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5634.60 50.70 68.20 -17.50 42.29 33.18 13.31 38.08 0.00 256 15 Peak 2 5650.69 49.45 68.71 -19.26 40.95 33.31 13.26 38.07 0.00 256 15 Peak 3 5702.31 50.59 105.85 -55.26 41.73 33.80 13.12 38.06 0.00 256 15 Peak 4 5720.25 50.52 111.37 -60.85 41.69 33.80 13.08 38.05 0.00 256 15 Peak	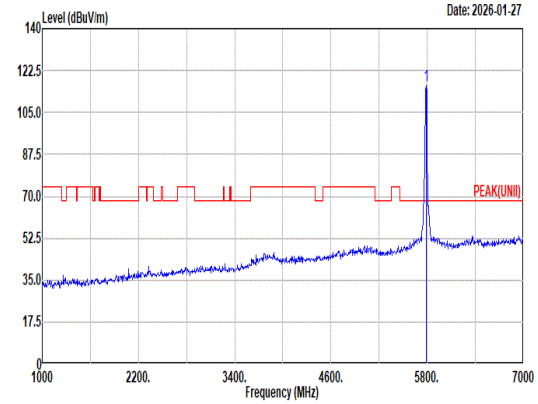 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 116.02 ------ ------ 107.37 33.80 12.89 38.04 0.00 256 15 Peak
Avg	Blank	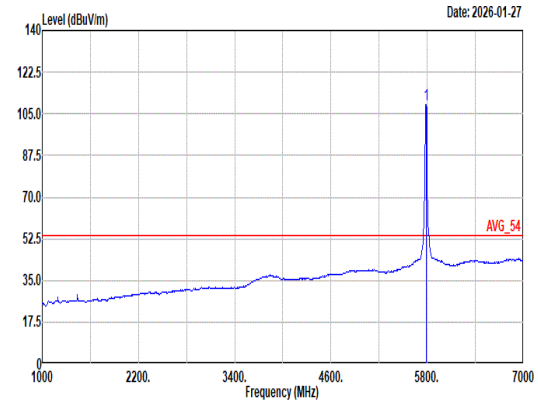 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 108.78 ------ ------ 100.13 33.80 12.89 38.04 0.00 256 15 Average

Mode	52	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	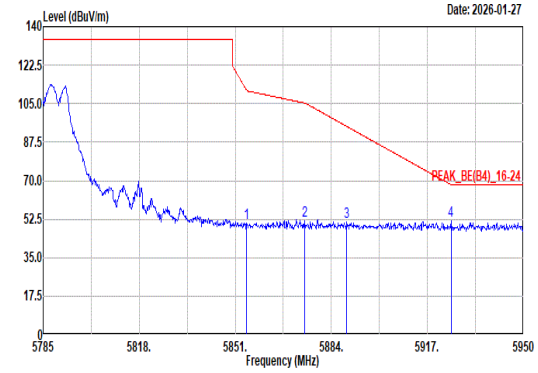 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 50.50 110.89 -60.39 41.70 33.71 13.11 38.02 0.00 256 15 Peak 2 5874.93 51.99 105.22 -53.23 43.05 33.75 13.20 38.01 0.00 256 15 Peak 3 5889.28 51.28 94.60 -43.32 42.24 33.78 13.27 38.01 0.00 256 15 Peak 4 5925.09 52.02 68.20 -16.18 42.83 33.75 13.44 38.00 0.00 256 15 Peak	Blank

Mode	52	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	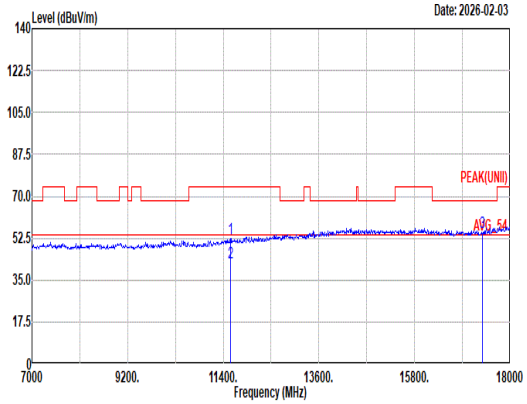 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL 1 11570.00 52.37 74.00 -21.63 36.79 38.60 19.20 42.81 0.59 -- -- Peak 2 11570.00 42.16 54.00 -11.84 26.58 38.60 19.20 42.81 0.59 -- -- Average 3 17355.00 54.79 68.20 -13.41 35.27 40.30 23.64 45.16 0.74 -- -- Peak	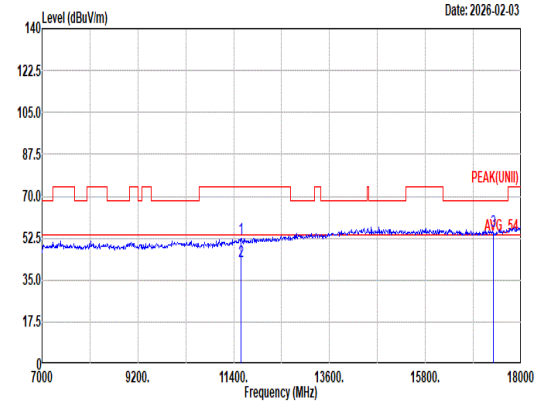 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL 1 11570.00 52.42 74.00 -21.58 36.84 38.60 19.20 42.81 0.59 -- -- Peak 2 11570.00 42.58 54.00 -11.42 27.00 38.60 19.20 42.81 0.59 -- -- Average 3 17355.00 55.47 68.20 -12.73 35.95 40.30 23.64 45.16 0.74 -- -- Peak

Mode	52	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	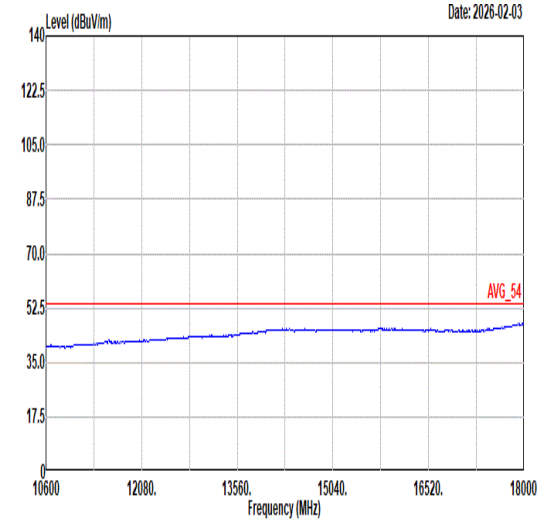 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	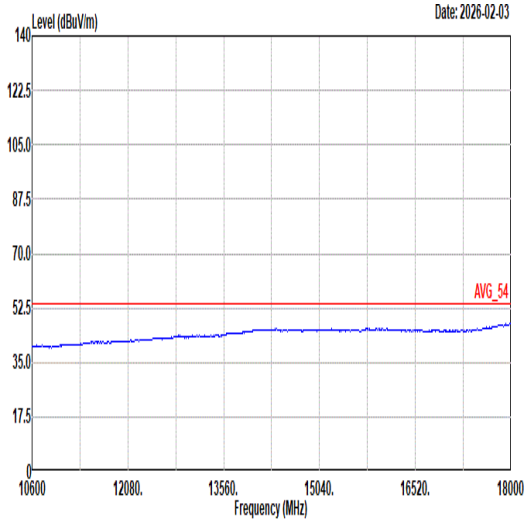 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	53
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	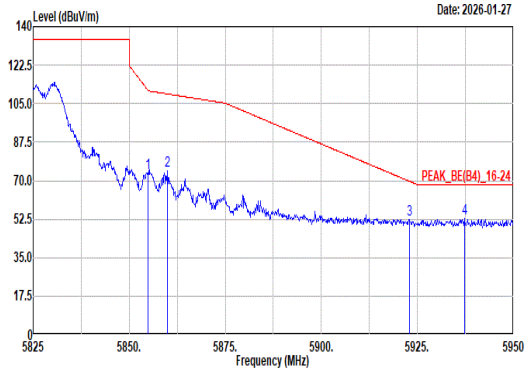 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 73.28 111.08 -37.80 64.48 33.71 13.11 38.02 0.00 200 43 Peak 2 5860.00 74.58 109.40 -34.82 65.74 33.72 13.14 38.02 0.00 200 43 Peak 3 5922.88 52.51 69.77 -17.26 43.33 33.75 13.43 38.00 0.00 200 43 Peak 4 5937.25 52.92 68.20 -15.28 43.70 33.73 13.49 38.00 0.00 200 43 Peak	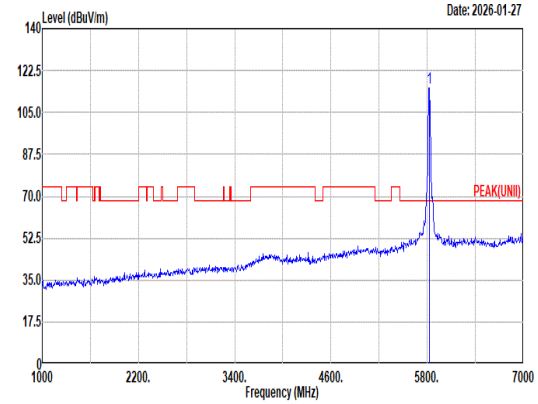 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 115.43 ------ ------ 106.76 33.76 12.94 38.03 0.00 200 43 Peak
Avg	Blank	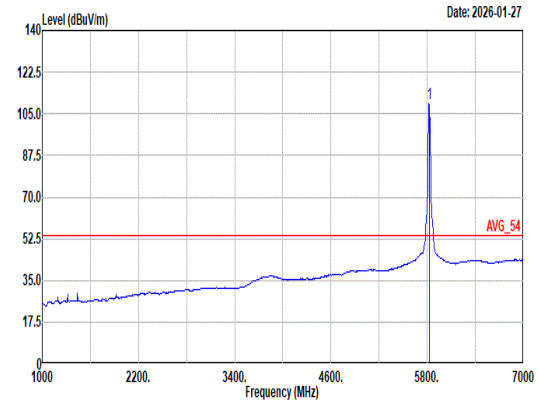 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.32 ------ ------ 100.65 33.76 12.94 38.03 0.00 200 43 Average

Mode	53	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	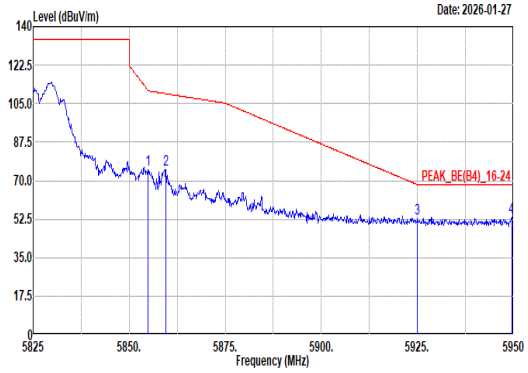 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 74.97 111.08 -36.11 66.17 33.71 13.11 38.02 0.00 233 353 Peak 2 5859.63 75.25 109.50 -34.25 66.42 33.72 13.13 38.02 0.00 233 353 Peak 3 5925.00 52.60 68.20 -15.60 43.42 33.75 13.43 38.00 0.00 233 353 Peak 4 5949.50 53.31 68.20 -14.89 44.05 33.70 13.55 37.99 0.00 233 353 Peak	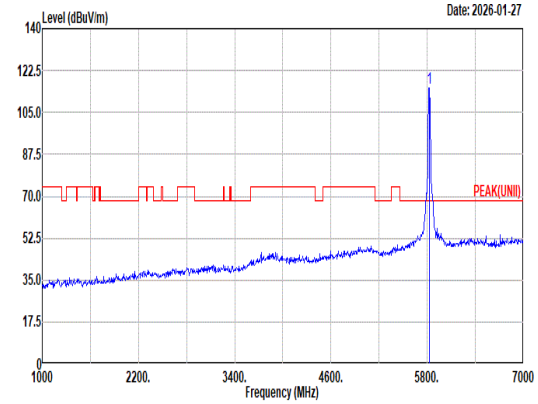 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 115.40 ------ ------ 106.73 33.76 12.94 38.03 0.00 233 353 Peak
Avg	Blank	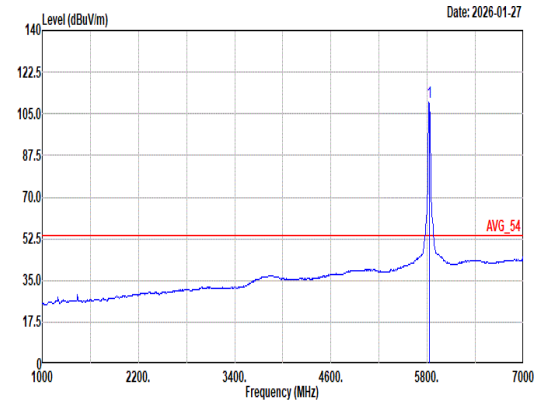 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.65 ------ ------ 100.98 33.76 12.94 38.03 0.00 233 353 Average

Mode	53	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	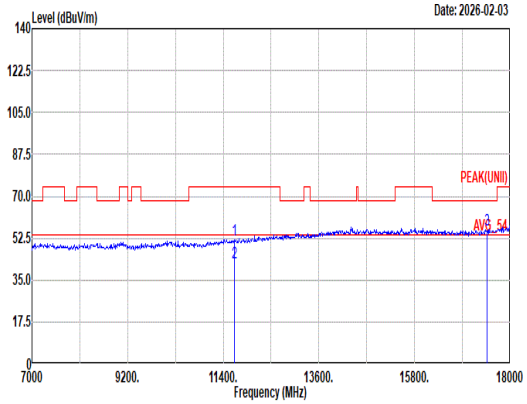 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 52.03 74.00 -21.97 36.51 38.50 19.31 42.88 0.59 -- -- Peak 2 11650.00 42.44 54.00 -11.56 26.92 38.50 19.31 42.88 0.59 -- -- Average 3 17475.00 55.84 68.20 -12.36 36.10 40.45 23.77 45.23 0.75 -- -- Peak	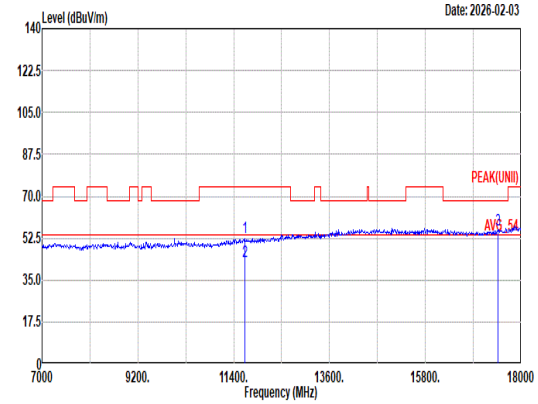 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 52.66 74.00 -21.34 37.14 38.50 19.31 42.88 0.59 -- -- Peak 2 11650.00 42.99 54.00 -11.01 27.47 38.50 19.31 42.88 0.59 -- -- Average 3 17475.00 56.08 68.20 -12.12 36.34 40.45 23.77 45.23 0.75 -- -- Peak

Mode	53	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	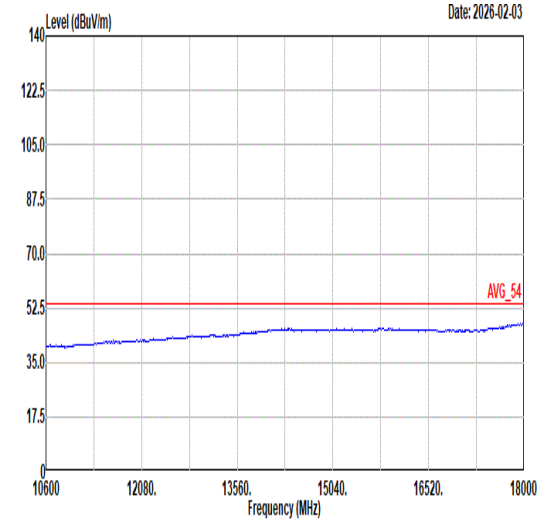 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	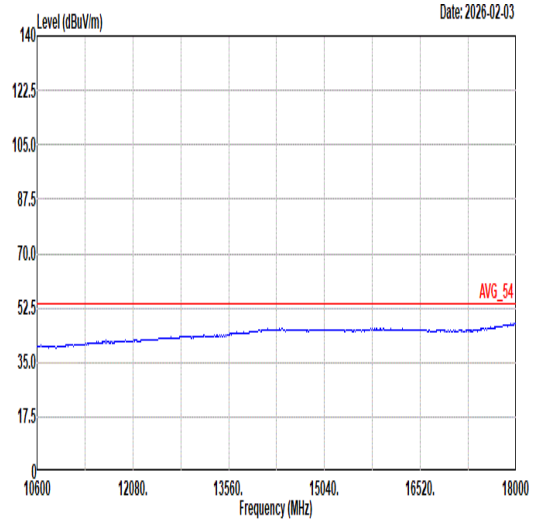 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	54	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	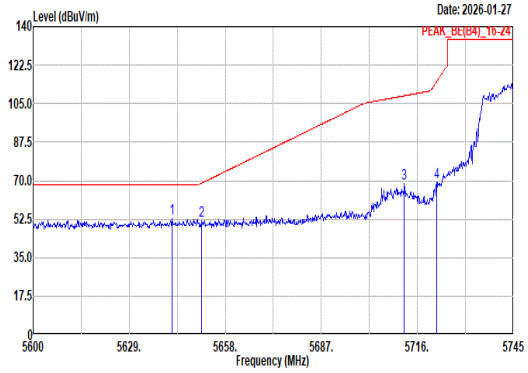 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.91 52.84 68.20 -15.36 44.38 33.24 13.29 38.07 0.00 212 37 Peak 2 5650.90 51.94 68.87 -16.93 43.44 33.31 13.26 38.07 0.00 212 37 Peak 3 5712.09 68.94 108.59 -39.65 60.09 33.80 13.10 38.05 0.00 212 37 Peak 4 5721.80 69.26 114.91 -45.65 60.44 33.80 13.07 38.05 0.00 212 37 Peak	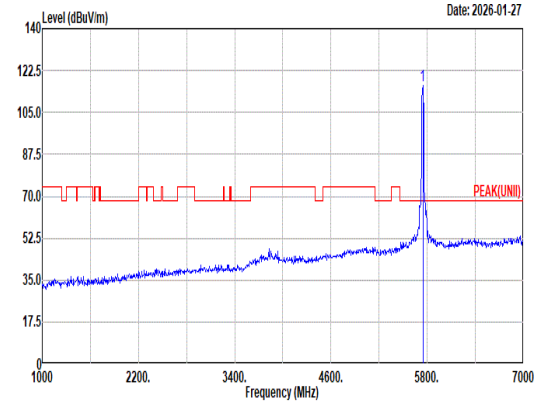 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 116.16 ------ ------ 107.41 33.80 12.99 38.04 0.00 212 37 Peak
Avg	Blank	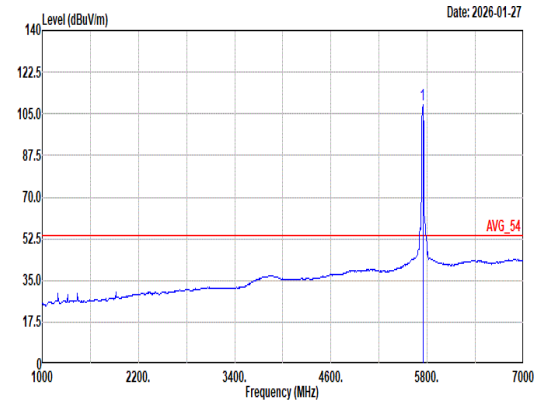 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 108.79 ------ ------ 100.03 33.80 13.01 38.05 0.00 212 37 Average

Mode	54	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	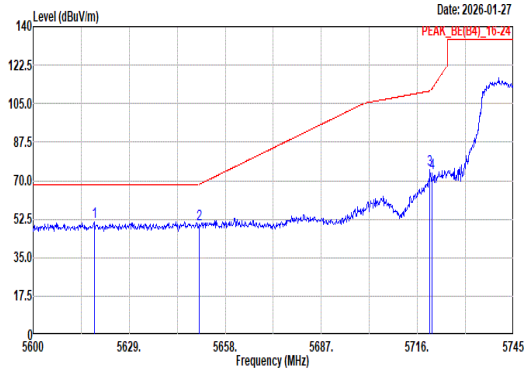 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5618.42 51.24 68.20 -16.96 42.92 33.05 13.35 38.08 0.00 261 356 Peak 2 5650.17 50.32 68.33 -18.01 41.83 33.30 13.26 38.07 0.00 261 356 Peak 3 5719.77 75.04 110.74 -35.70 66.21 33.80 13.08 38.05 0.00 261 356 Peak 4 5720.35 73.31 111.60 -38.29 64.48 33.80 13.08 38.05 0.00 261 356 Peak	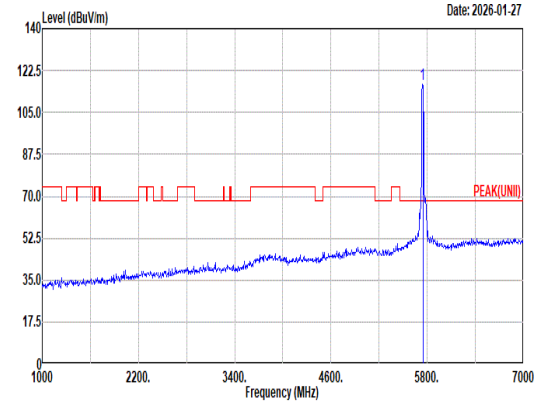 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 116.79 ------ ------ 108.02 33.80 13.02 38.05 0.00 261 356 Peak
Avg	Blank	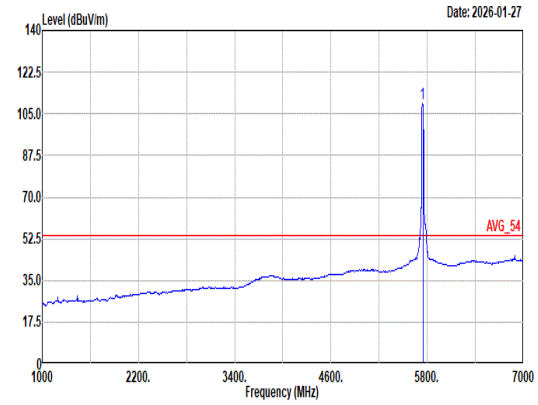 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.15 ------ ------ 100.38 33.80 13.02 38.05 0.00 261 356 Average

Mode	55	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH149_Partial_106/53RU _5745MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	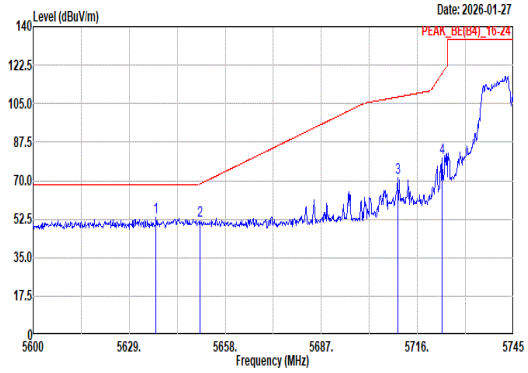 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5637.12 53.33 68.20 -14.87 44.90 33.20 13.30 38.07 0.00 213 44 Peak 2 5650.32 51.56 68.43 -16.87 43.07 33.30 13.26 38.07 0.00 213 44 Peak 3 5710.06 71.27 108.02 -36.75 62.43 33.80 13.10 38.06 0.00 213 44 Peak 4 5723.40 80.29 118.54 -38.25 71.47 33.80 13.07 38.05 0.00 213 44 Peak	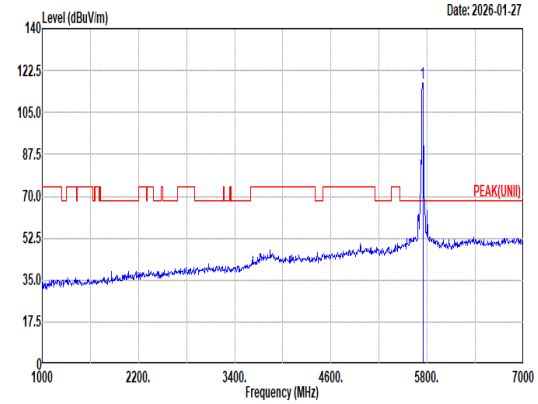 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 117.46 ------ ------ 108.69 33.80 13.02 38.05 0.00 213 44 Peak
Avg	Blank	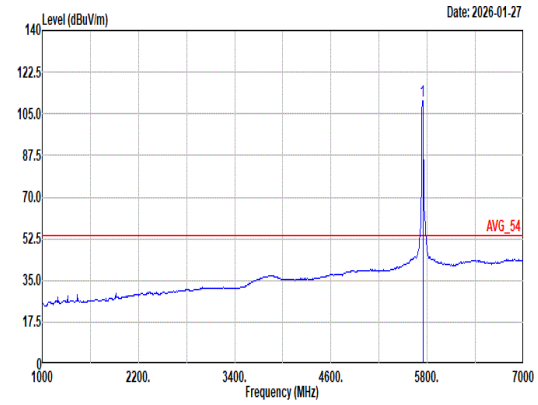 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 110.51 ------ ------ 101.74 33.80 13.02 38.05 0.00 213 44 Average

Mode	55	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH149_Partial_106/53RU _5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	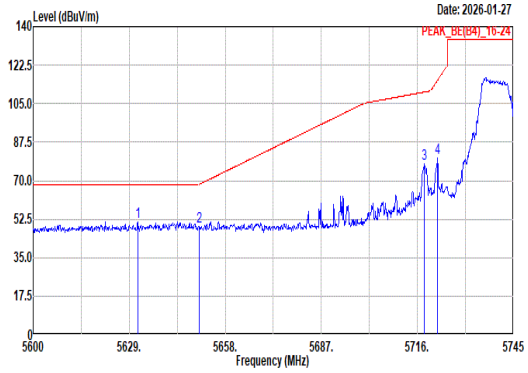 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5631.61 51.27 68.20 -16.93 42.89 33.15 13.31 38.08 0.00 260 0 Peak 2 5650.17 49.25 68.33 -19.08 40.76 33.30 13.26 38.07 0.00 260 0 Peak 3 5718.18 77.41 110.29 -32.88 68.58 33.80 13.08 38.05 0.00 260 0 Peak 4 5722.09 80.32 115.57 -35.25 71.50 33.80 13.07 38.05 0.00 260 0 Peak	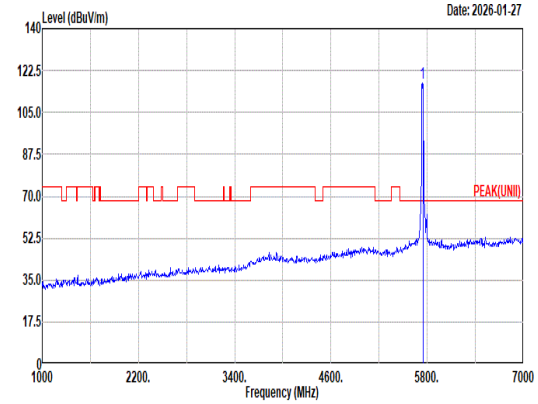 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 117.52 ------ ------ 108.75 33.80 13.02 38.05 0.00 260 0 Peak
Avg	Blank	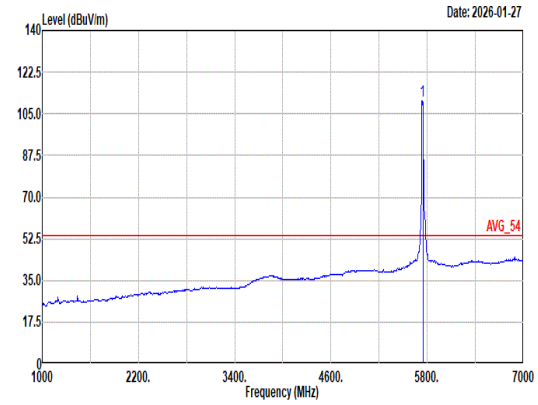 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 110.36 ------ ------ 101.59 33.80 13.02 38.05 0.00 260 0 Average

Mode	56	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	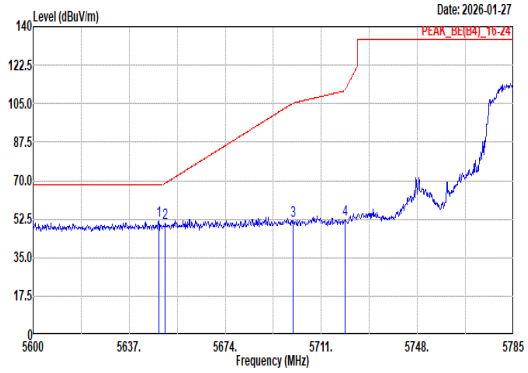 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.29 51.65 68.20 -16.55 43.16 33.29 13.27 38.07 0.00 209 44 Peak 2 5650.88 50.50 68.85 -18.35 42.00 33.31 13.26 38.07 0.00 209 44 Peak 3 5700.09 51.63 105.22 -53.59 42.76 33.80 13.13 38.06 0.00 209 44 Peak 4 5720.25 52.49 111.37 -58.88 43.66 33.80 13.08 38.05 0.00 209 44 Peak	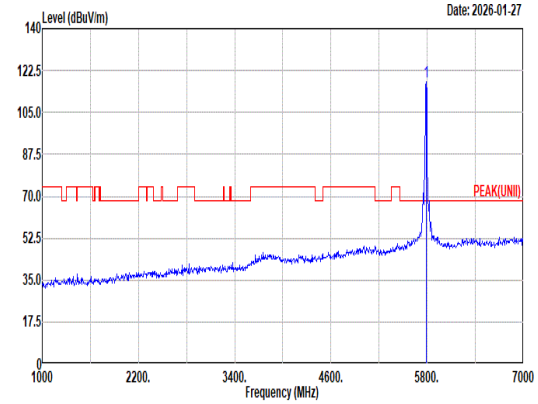 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 117.61 ------ ------ 108.96 33.80 12.89 38.04 0.00 209 44 Peak
Avg	Blank	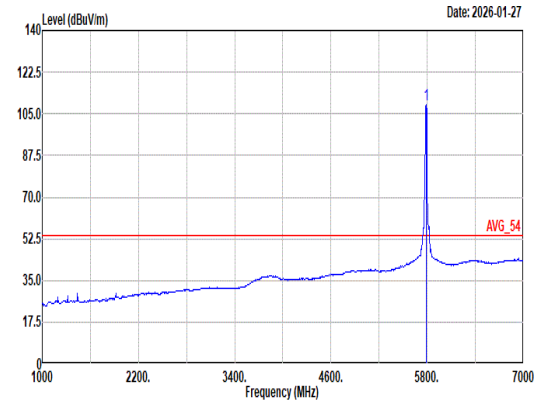 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 108.76 ------ ------ 100.11 33.80 12.89 38.04 0.00 209 44 Average

Mode	56	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	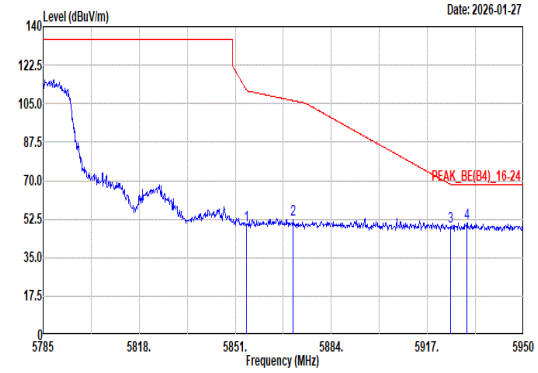 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 49.80 110.89 -61.09 41.00 33.71 13.11 38.02 0.00 209 44 Peak 2 5870.97 52.37 106.33 -53.96 43.45 33.74 13.19 38.01 0.00 209 44 Peak 3 5924.92 49.29 68.26 -18.97 40.11 33.75 13.43 38.00 0.00 209 44 Peak 4 5930.53 50.63 68.20 -17.57 41.43 33.74 13.46 38.00 0.00 209 44 Peak	Blank

Mode	56
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	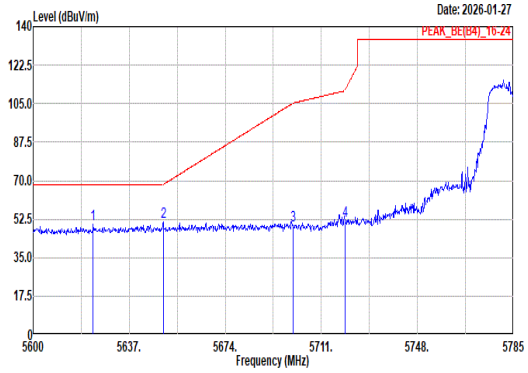 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.13 49.99 68.20 -18.21 41.65 33.08 13.34 38.08 0.00 272 360 Peak 2 5650.14 51.07 68.30 -17.23 42.58 33.30 13.26 38.07 0.00 272 360 Peak 3 5700.09 49.62 105.22 -55.60 40.75 33.80 13.13 38.06 0.00 272 360 Peak 4 5720.07 51.76 110.95 -59.19 42.93 33.80 13.08 38.05 0.00 272 360 Peak	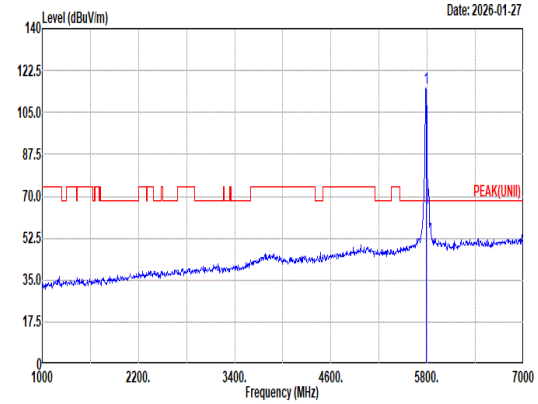 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 115.23 ------ ------ 106.56 33.80 12.91 38.04 0.00 272 360 Peak
Avg	Blank	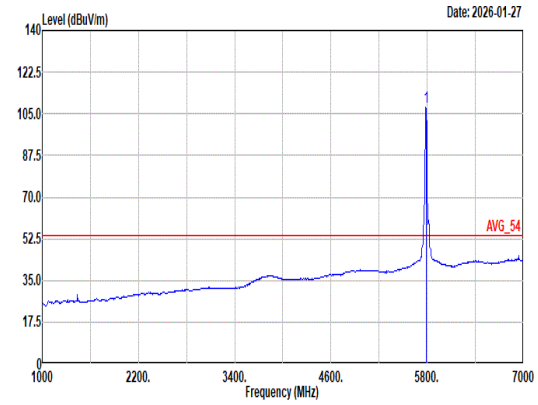 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 107.58 ------ ------ 98.91 33.80 12.91 38.04 0.00 272 360 Average

Mode	56	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	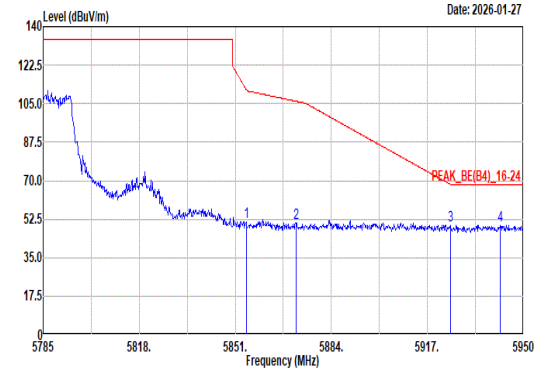 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 51.15 111.27 -60.12 42.35 33.71 13.11 38.02 0.00 272 360 Peak 2 5871.79 50.85 106.10 -55.25 41.93 33.74 13.19 38.01 0.00 272 360 Peak 3 5924.92 49.51 68.26 -18.75 40.33 33.75 13.43 38.00 0.00 272 360 Peak 4 5942.08 49.80 68.20 -18.40 40.57 33.72 13.51 38.00 0.00 272 360 Peak	Blank

Mode	56	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	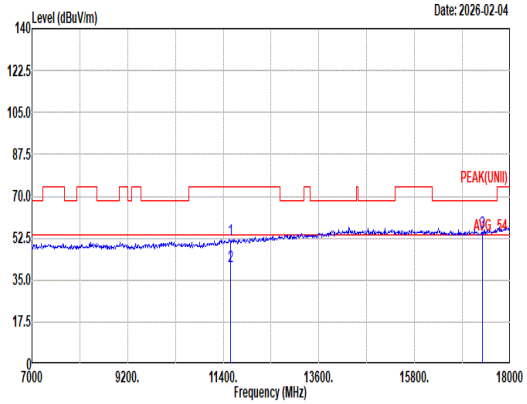 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 51.61 74.00 -22.39 36.03 38.60 19.20 42.81 0.59 -- -- Peak 2 11570.00 40.87 54.00 -13.13 25.29 38.60 19.20 42.81 0.59 -- -- Average 3 17355.00 55.04 68.20 -13.16 35.52 40.30 23.64 45.16 0.74 -- -- Peak	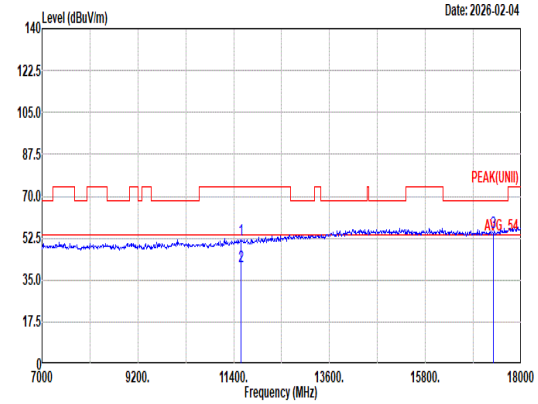 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 51.68 74.00 -22.32 36.10 38.60 19.20 42.81 0.59 -- -- Peak 2 11570.00 40.88 54.00 -13.12 25.30 38.60 19.20 42.81 0.59 -- -- Average 3 17355.00 54.80 68.20 -13.40 35.28 40.30 23.64 45.16 0.74 -- -- Peak

Mode	56	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	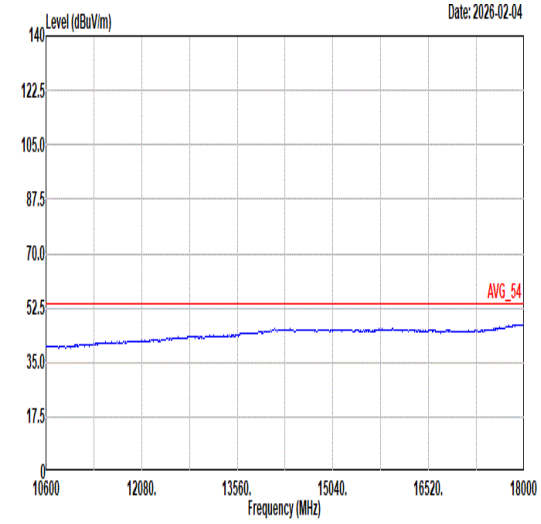 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	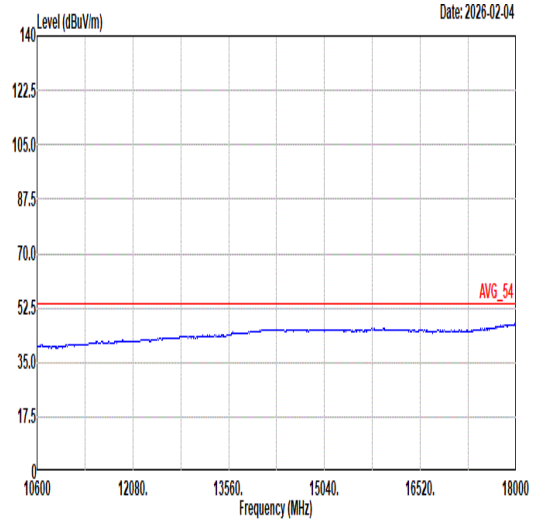 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	57	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	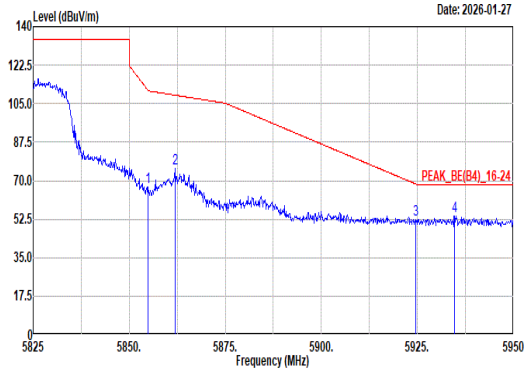 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 67.17 111.08 -43.91 58.37 33.71 13.11 38.02 0.00 207 42 Peak 2 5861.88 75.72 108.87 -33.15 66.88 33.72 13.14 38.02 0.00 207 42 Peak 3 5924.50 52.25 68.57 -16.32 43.07 33.75 13.43 38.00 0.00 207 42 Peak 4 5934.63 54.02 68.20 -14.18 44.81 33.73 13.48 38.00 0.00 207 42 Peak	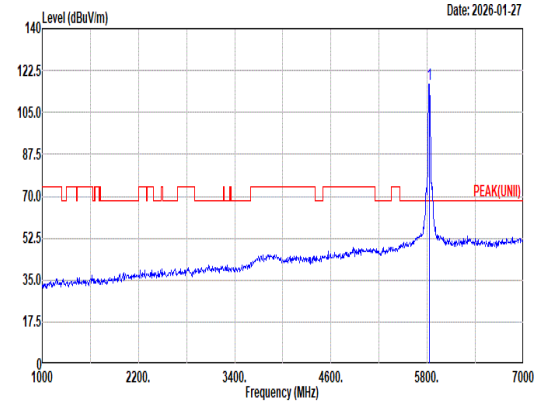 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 116.87 ------ ------ 108.15 33.74 13.00 38.02 0.00 207 42 Peak
Avg	Blank	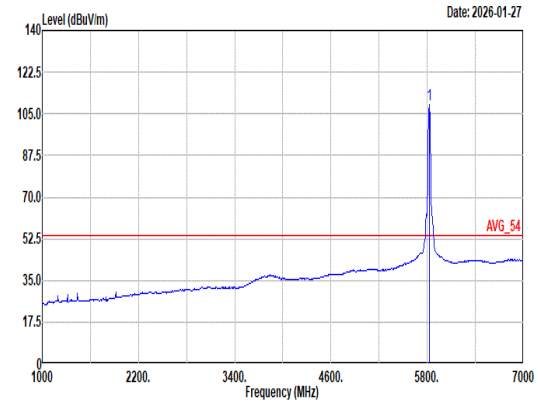 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 108.77 ------ ------ 100.05 33.74 13.00 38.02 0.00 207 42 Average

Mode	57	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	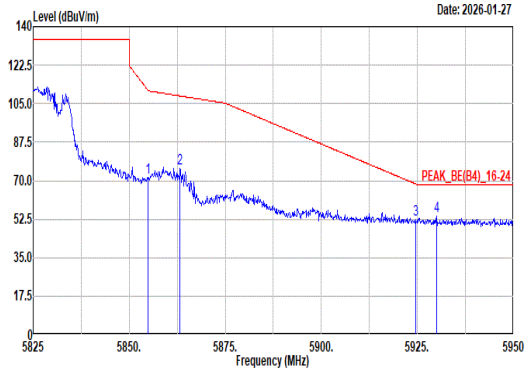 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 71.30 111.08 -39.78 62.50 33.71 13.11 38.02 0.00 241 356 Peak 2 5863.25 75.41 108.49 -33.08 66.55 33.73 13.15 38.02 0.00 241 356 Peak 3 5924.50 52.51 68.57 -16.06 43.33 33.75 13.43 38.00 0.00 241 356 Peak 4 5930.00 53.99 68.20 -14.21 44.79 33.74 13.46 38.00 0.00 241 356 Peak	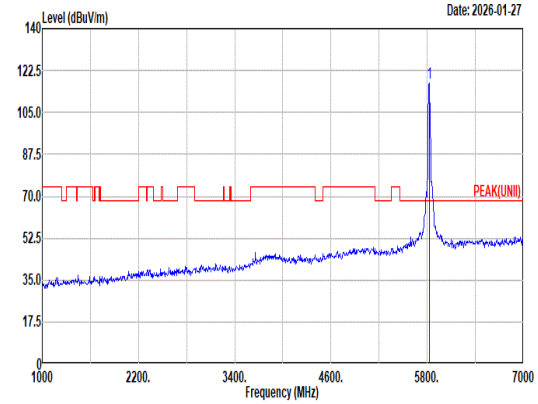 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 117.05 ------ ------ 108.36 33.75 12.97 38.03 0.00 241 356 Peak
Avg	Blank	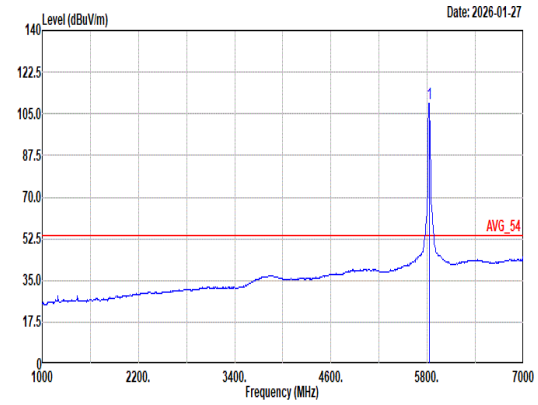 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.17 ------ ------ 100.50 33.76 12.94 38.03 0.00 241 356 Average

Mode	57	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	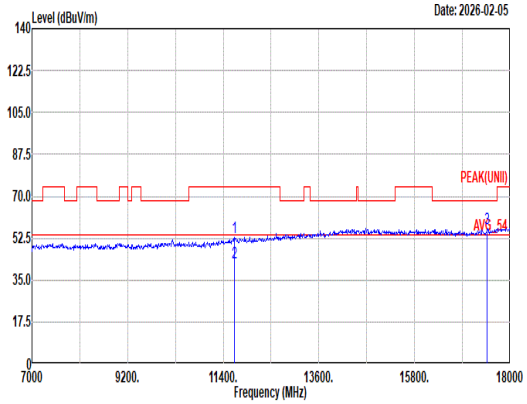 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 52.60 74.00 -21.40 37.08 38.50 19.31 42.88 0.59 -- -- Peak 2 11650.00 42.13 54.00 -11.87 26.61 38.50 19.31 42.88 0.59 -- -- Average 3 17475.00 56.58 68.20 -11.62 36.84 40.45 23.77 45.23 0.75 -- -- Peak	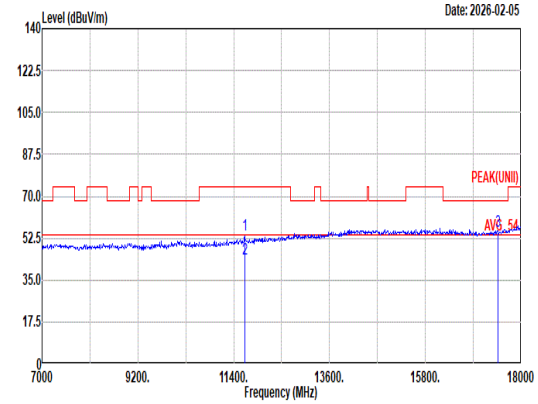 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 53.65 74.00 -20.35 38.13 38.50 19.31 42.88 0.59 100 344 Peak 2 11650.00 43.83 54.00 -10.17 28.31 38.50 19.31 42.88 0.59 100 344 Average 3 17475.00 55.69 68.20 -12.51 35.95 40.45 23.77 45.23 0.75 -- -- Peak

Mode	57	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	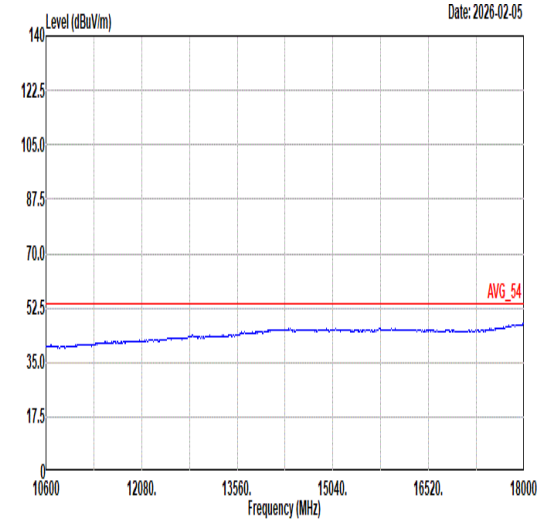 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	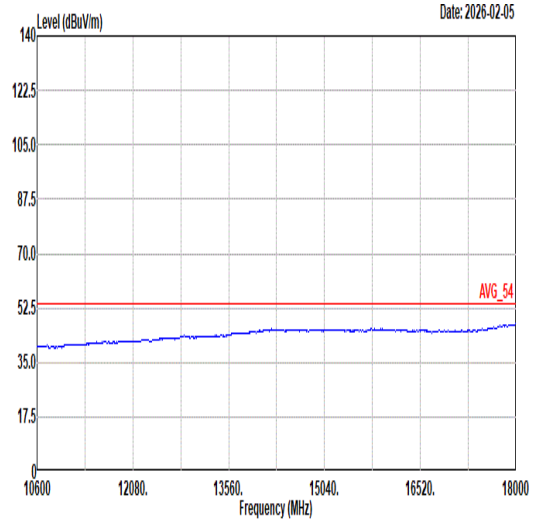 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	58
	Band Edge
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Partial_106/54RU _5825MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	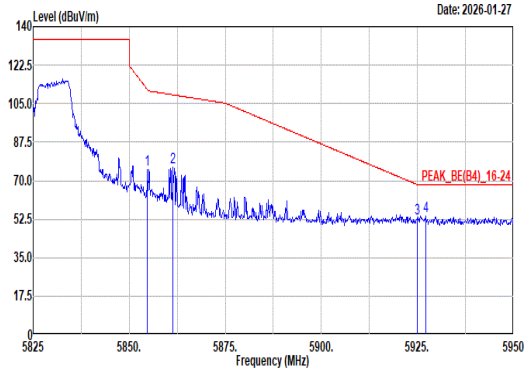 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.75 75.04 111.37 -36.33 66.24 33.71 13.11 38.02 0.00 170 360 Peak 2 5861.38 75.95 109.01 -33.06 67.11 33.72 13.14 38.02 0.00 170 360 Peak 3 5924.88 52.59 68.29 -15.70 43.41 33.75 13.43 38.00 0.00 170 360 Peak 4 5927.13 53.91 68.20 -14.29 44.72 33.75 13.44 38.00 0.00 170 360 Peak	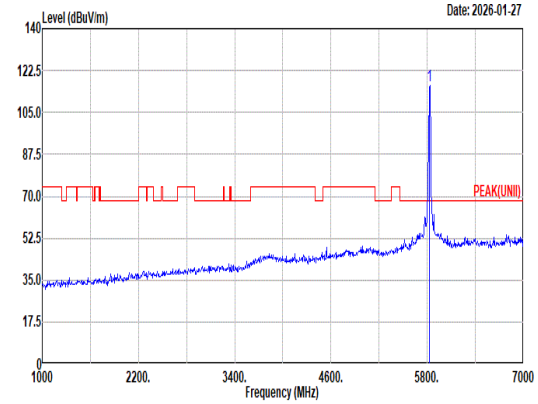 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 116.42 ------ ------ 107.68 33.73 13.03 38.02 0.00 170 360 Peak
Avg	Blank	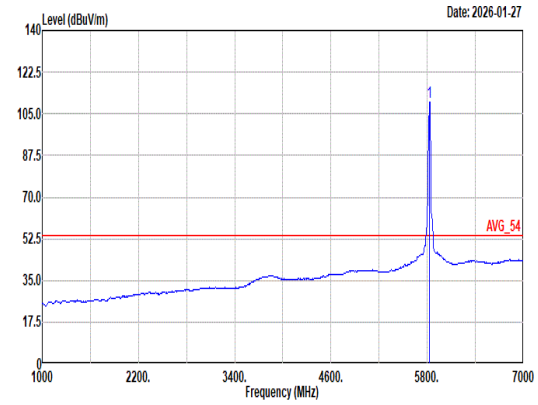 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.89 ------ ------ 101.15 33.73 13.03 38.02 0.00 170 360 Average

Mode	58	
	Band Edge	
	U-NII-3_5.725-5.85_802.11be EHT20_CH165_Partial_106/54RU _5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	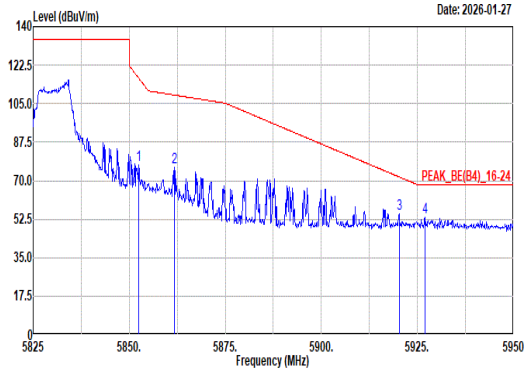 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5852.50 76.93 116.50 -39.57 68.14 33.71 13.10 38.02 0.00 200 4 Peak 2 5861.75 76.07 108.91 -32.84 67.23 33.72 13.14 38.02 0.00 200 4 Peak 3 5920.25 54.98 71.70 -16.72 45.81 33.76 13.41 38.00 0.00 200 4 Peak 4 5927.00 53.16 68.20 -15.04 43.97 33.75 13.44 38.00 0.00 200 4 Peak	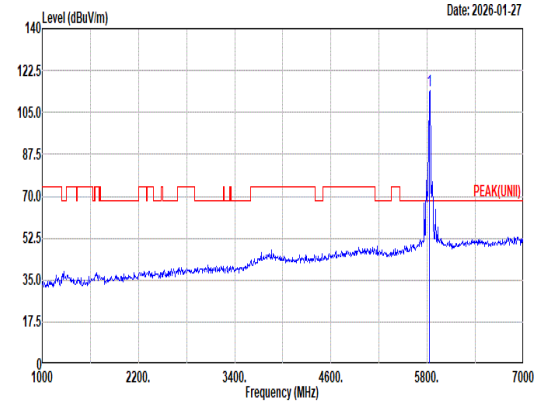 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 114.16 ------ ------ 105.42 33.73 13.03 38.02 0.00 200 4 Peak
Avg	Blank	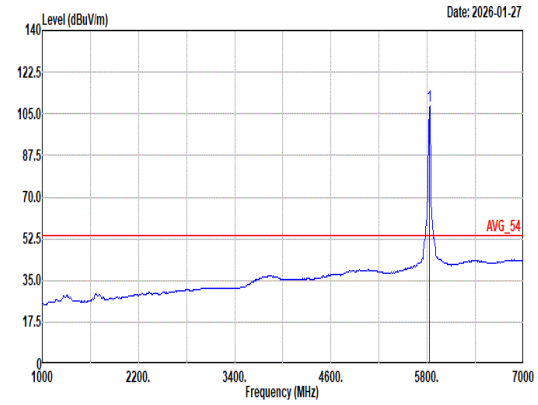 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 108.10 ------ ------ 99.36 33.73 13.03 38.02 0.00 200 4 Average

Mode	59	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	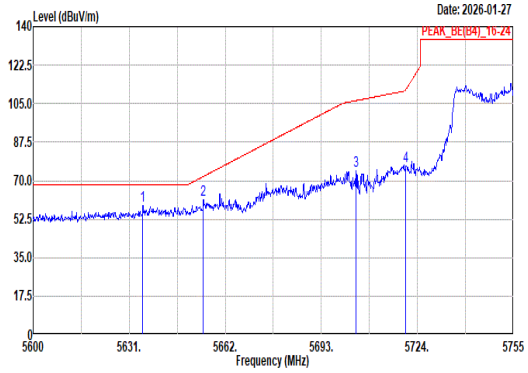 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5635.34 58.82 68.20 -9.38 50.41 33.18 13.30 38.07 0.00 200 43 Peak 2 5654.87 61.50 71.82 -10.32 52.97 33.35 13.25 38.07 0.00 200 43 Peak 3 5704.16 74.74 106.37 -31.63 65.88 33.80 13.12 38.06 0.00 200 43 Peak 4 5720.28 76.62 111.44 -34.82 67.79 33.80 13.08 38.05 0.00 200 43 Peak	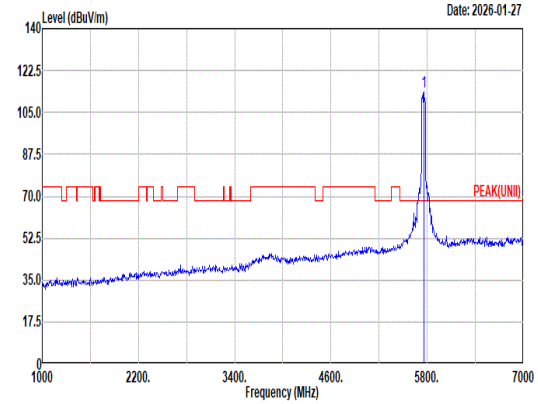 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 113.35 ------ ------ 104.62 33.80 12.97 38.04 0.00 200 43 Peak
Avg	Blank	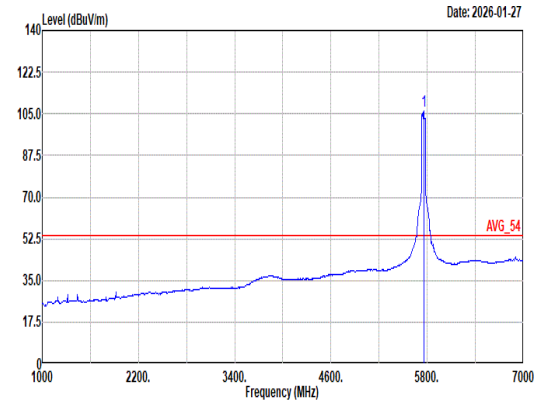 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 106.02 ------ ------ 97.29 33.80 12.97 38.04 0.00 200 43 Average

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	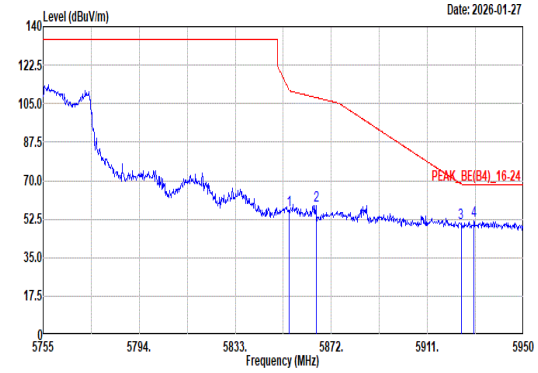 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 56.55 111.16 -54.61 47.75 33.71 13.11 38.02 0.00 200 43 Peak 2 5865.76 58.48 107.78 -49.30 49.60 33.73 13.16 38.01 0.00 200 43 Peak 3 5924.65 50.56 68.46 -17.90 41.38 33.75 13.43 38.00 0.00 200 43 Peak 4 5929.92 51.76 68.20 -16.44 42.56 33.74 13.46 38.00 0.00 200 43 Peak	Blank

Mode	59
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	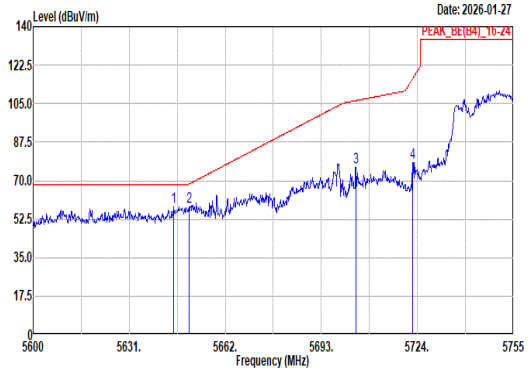 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.42 57.97 68.20 -10.23 49.50 33.26 13.28 38.07 0.00 106 360 Peak 2 5650.22 58.25 68.36 -10.11 49.76 33.30 13.26 38.07 0.00 106 360 Peak 3 5704.16 76.25 106.37 -30.12 67.39 33.80 13.12 38.06 0.00 106 360 Peak 4 5722.45 78.22 116.39 -38.17 69.40 33.80 13.07 38.05 0.00 106 360 Peak	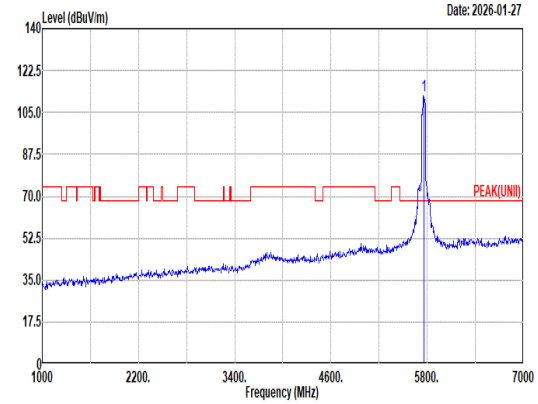 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 112.23 ------ ------ 103.48 33.80 12.99 38.04 0.00 106 360 Peak
Avg	Blank	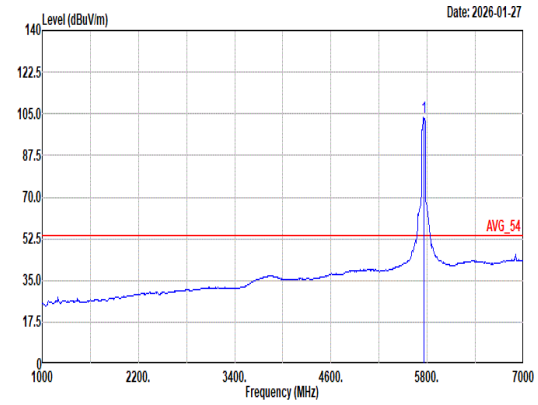 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 103.69 ------ ------ 94.94 33.80 12.99 38.04 0.00 106 360 Average

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	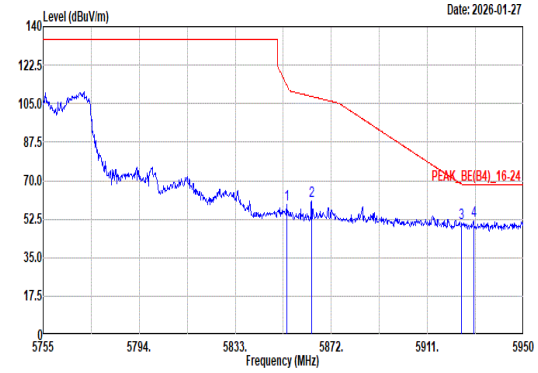 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.87 59.42 113.39 -53.97 50.62 33.71 13.11 38.02 0.00 106 360 Peak 2 5864.01 60.64 108.28 -47.64 51.78 33.73 13.15 38.02 0.00 106 360 Peak 3 5924.85 50.75 68.31 -17.56 41.57 33.75 13.43 38.00 0.00 106 360 Peak 4 5929.72 51.83 68.20 -16.37 42.63 33.74 13.46 38.00 0.00 106 360 Peak	Blank

Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	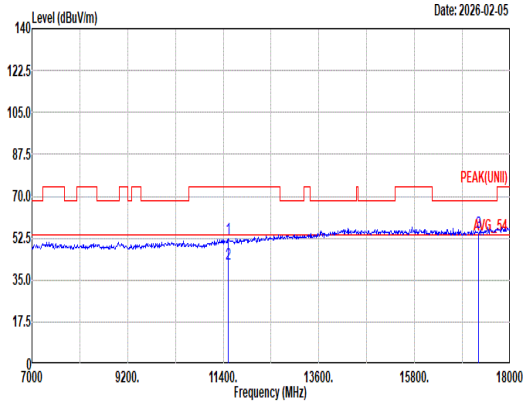 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 52.33 74.00 -21.67 36.78 38.60 19.13 42.77 0.59 -- -- Peak 2 11510.00 41.56 54.00 -12.44 26.01 38.60 19.13 42.77 0.59 -- -- Average 3 17265.00 55.18 68.20 -13.02 35.78 40.23 23.54 45.11 0.74 -- -- Peak	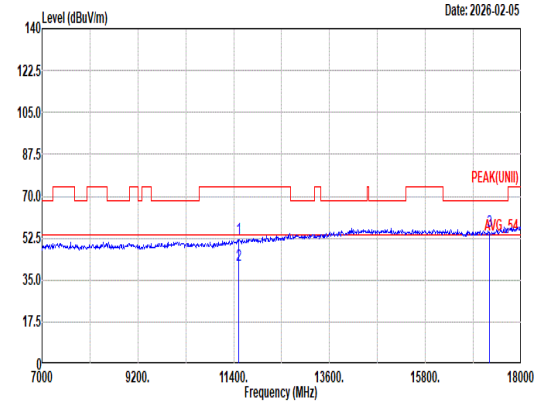 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 52.20 74.00 -21.80 36.65 38.60 19.13 42.77 0.59 -- -- Peak 2 11510.00 41.47 54.00 -12.53 25.92 38.60 19.13 42.77 0.59 -- -- Average 3 17265.00 55.66 68.20 -12.54 36.26 40.23 23.54 45.11 0.74 -- -- Peak

Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	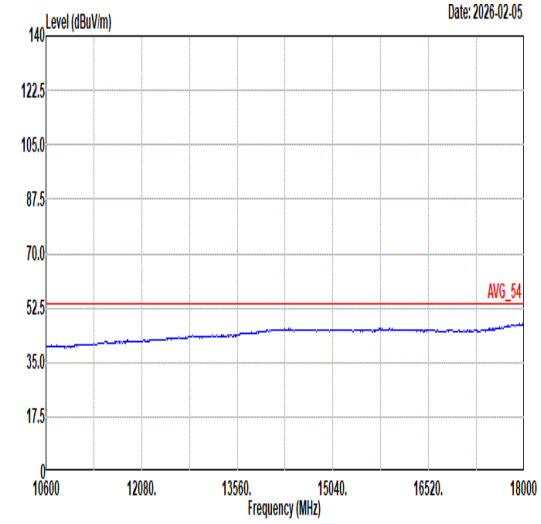 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	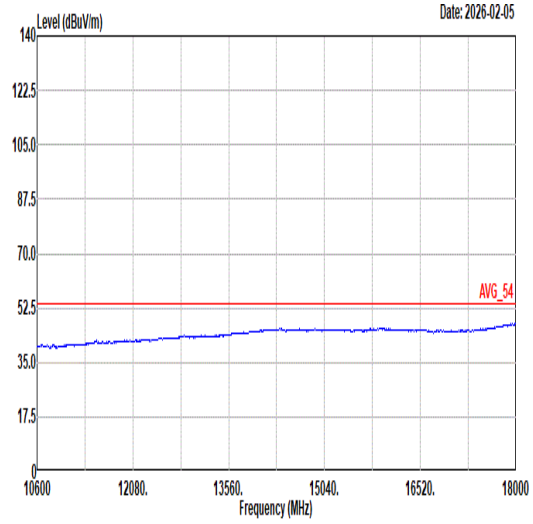 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	60	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Partial_242/61RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	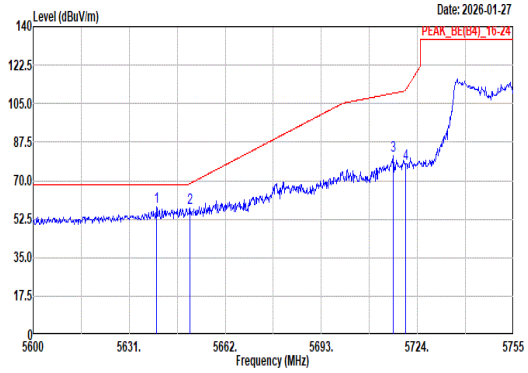 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.84 57.98 68.20 -10.22 49.54 33.22 13.29 38.07 0.00 194 43 Peak 2 5650.69 57.79 68.71 -10.92 49.29 33.31 13.26 38.07 0.00 194 43 Peak 3 5716.10 81.12 109.71 -28.59 72.28 33.80 13.09 38.05 0.00 194 43 Peak 4 5720.13 77.87 111.09 -33.22 69.04 33.80 13.08 38.05 0.00 194 43 Peak	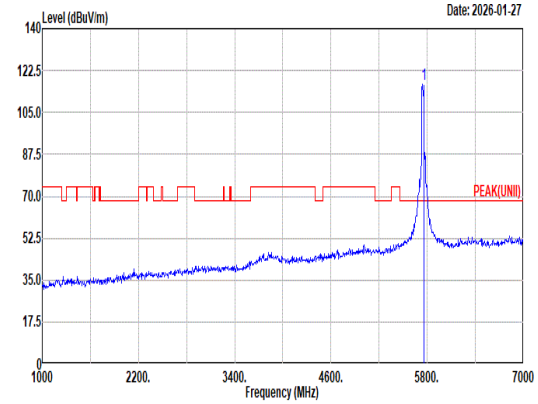 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 116.83 ------ ------ 108.06 33.80 13.02 38.05 0.00 194 43 Peak
Avg	Blank	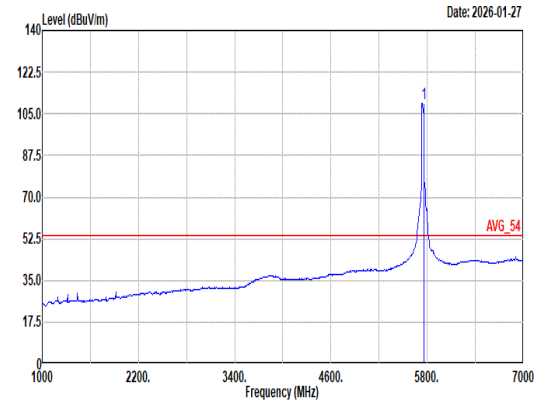 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 109.51 ------ ------ 100.74 33.80 13.02 38.05 0.00 194 43 Average

Mode	60	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Partial_242/61RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	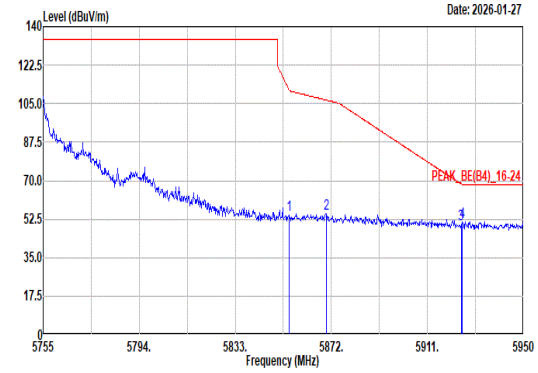 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 54.45 111.16 -56.71 45.65 33.71 13.11 38.02 0.00 194 43 Peak 2 5869.86 54.97 106.64 -51.67 46.06 33.74 13.18 38.01 0.00 194 43 Peak 3 5924.65 50.05 68.46 -18.41 40.87 33.75 13.43 38.00 0.00 194 43 Peak 4 5925.24 51.40 68.20 -16.80 42.21 33.75 13.44 38.00 0.00 194 43 Peak	Blank

Mode	60	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Partial_242/61RU_5755MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	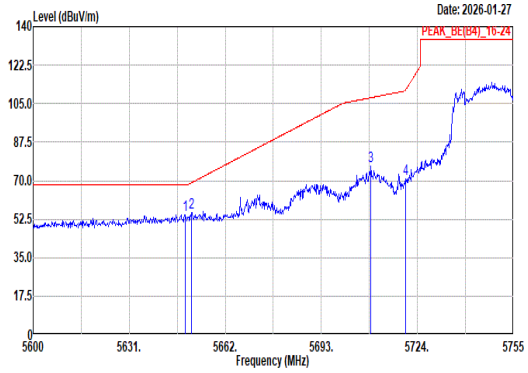 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.98 54.46 68.20 -13.74 45.97 33.29 13.27 38.07 0.00 254 0 Peak 2 5651.15 55.59 69.05 -13.46 47.09 33.31 13.26 38.07 0.00 254 0 Peak 3 5708.97 76.58 107.71 -31.13 67.73 33.80 13.11 38.06 0.00 254 0 Peak 4 5720.13 70.63 111.09 -40.46 61.80 33.80 13.08 38.05 0.00 254 0 Peak	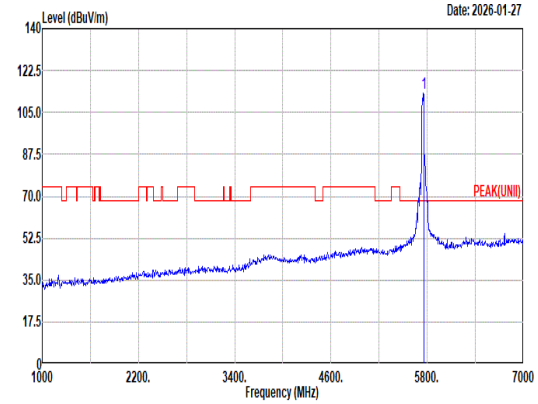 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 113.24 ------ ------ 104.48 33.80 13.01 38.05 0.00 254 0 Peak
Avg	Blank	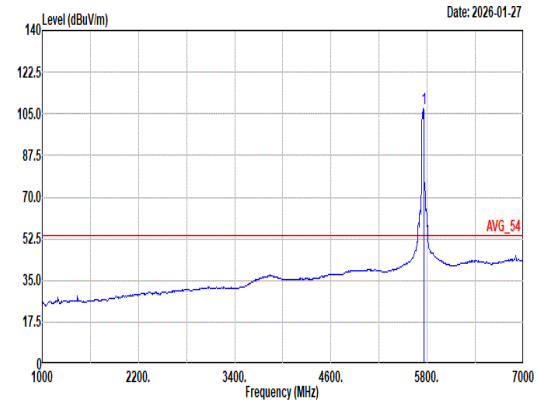 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 107.14 ------ ------ 98.38 33.80 13.01 38.05 0.00 254 0 Average

Mode	60	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH151_Partial_242/61RU_5755MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	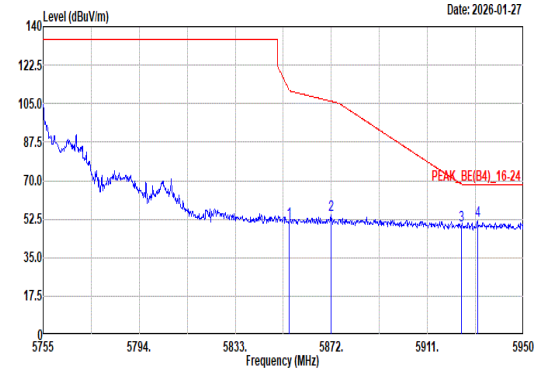 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 51.41 111.16 -59.75 42.61 33.71 13.11 38.02 0.00 254 0 Peak 2 5871.81 54.39 106.09 -51.70 45.47 33.74 13.19 38.01 0.00 254 0 Peak 3 5924.85 49.78 68.31 -18.53 40.60 33.75 13.43 38.00 0.00 254 0 Peak 4 5931.28 51.60 68.20 -16.60 42.40 33.74 13.46 38.00 0.00 254 0 Peak	Blank

Mode	61	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	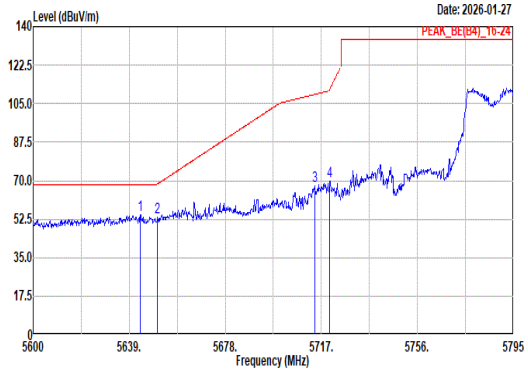 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.49 54.63 68.20 -13.57 46.17 33.25 13.28 38.07 0.00 221 42 Peak 2 5650.51 53.39 68.58 -15.19 44.89 33.31 13.26 38.07 0.00 221 42 Peak 3 5714.27 67.78 109.20 -41.42 58.94 33.80 13.09 38.05 0.00 221 42 Peak 4 5720.32 69.77 111.52 -41.75 60.94 33.80 13.08 38.05 0.00 221 42 Peak	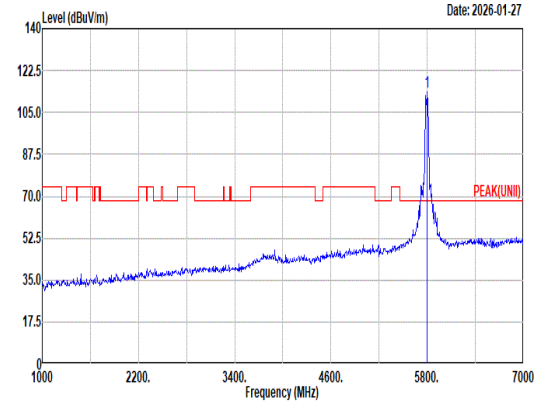 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 113.52 ------ ------ 104.89 33.80 12.86 38.03 0.00 221 42 Peak
Avg	Blank	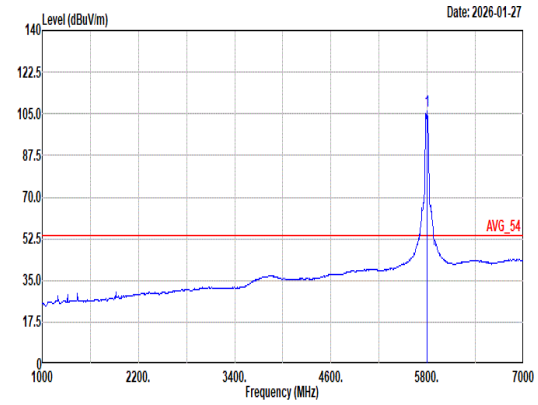 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 106.31 ------ ------ 97.68 33.80 12.86 38.03 0.00 221 42 Average

Mode	61	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	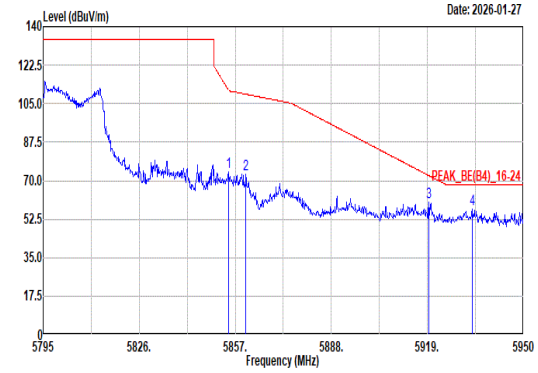 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.83 73.78 111.19 -37.41 64.98 33.71 13.11 38.02 0.00 221 42 Peak 2 5860.41 73.06 109.28 -36.22 64.22 33.72 13.14 38.02 0.00 221 42 Peak 3 5919.47 60.19 72.28 -12.09 51.02 33.76 13.41 38.00 0.00 221 42 Peak 4 5933.42 57.05 68.20 -11.15 47.85 33.73 13.47 38.00 0.00 221 42 Peak	Blank

Mode	61	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	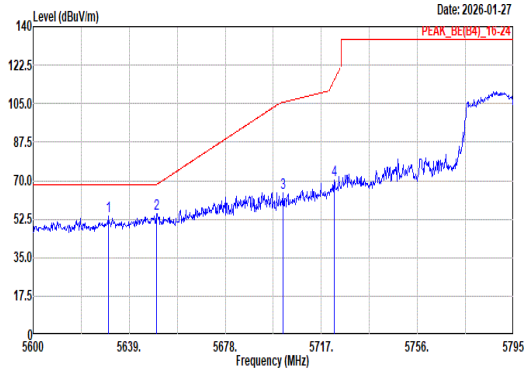 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.62 53.99 68.20 -14.21 45.61 33.14 13.32 38.08 0.00 228 360 Peak 2 5650.12 54.80 68.29 -13.49 46.31 33.30 13.26 38.07 0.00 228 360 Peak 3 5701.40 64.68 105.59 -40.91 55.81 33.80 13.13 38.06 0.00 228 360 Peak 4 5722.27 70.29 115.97 -45.68 61.47 33.80 13.07 38.05 0.00 228 360 Peak	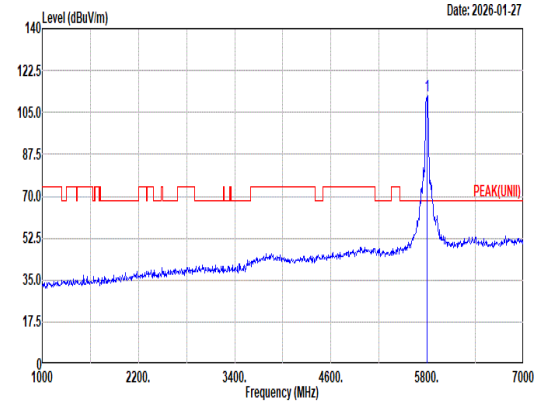 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 111.83 ------ ------ 103.18 33.79 12.89 38.03 0.00 228 360 Peak
Avg	Blank	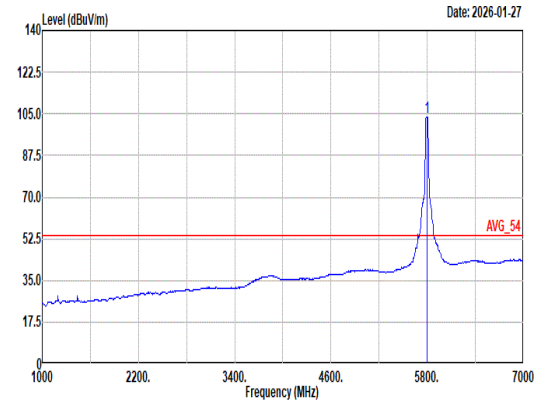 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 103.77 ------ ------ 95.12 33.80 12.89 38.04 0.00 228 360 Average

Mode	61	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	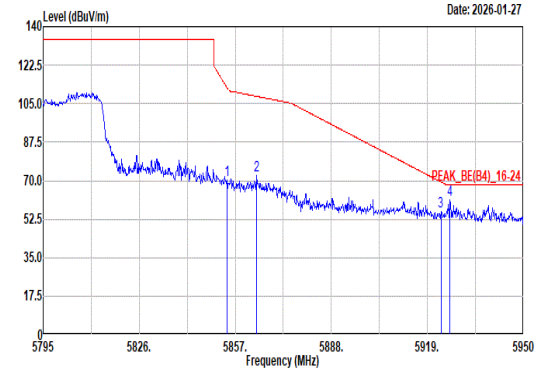 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.37 70.49 112.25 -41.76 61.69 33.71 13.11 38.02 0.00 228 360 Peak 2 5863.98 72.35 108.28 -35.93 63.49 33.73 13.15 38.02 0.00 228 360 Peak 3 5923.34 55.89 69.42 -13.53 46.71 33.75 13.43 38.00 0.00 228 360 Peak 4 5926.13 61.46 68.20 -6.74 52.27 33.75 13.44 38.00 0.00 228 360 Peak	Blank

Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	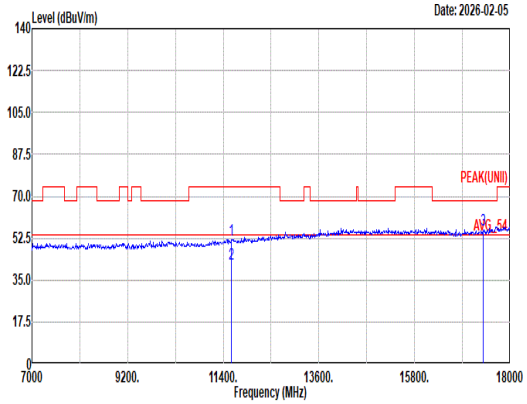 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.91 74.00 -22.09 36.32 38.60 19.23 42.83 0.59 -- -- Peak 2 11590.00 41.60 54.00 -12.40 26.01 38.60 19.23 42.83 0.59 -- -- Average 3 17385.00 55.85 68.20 -12.35 36.31 40.30 23.67 45.18 0.75 -- -- Peak	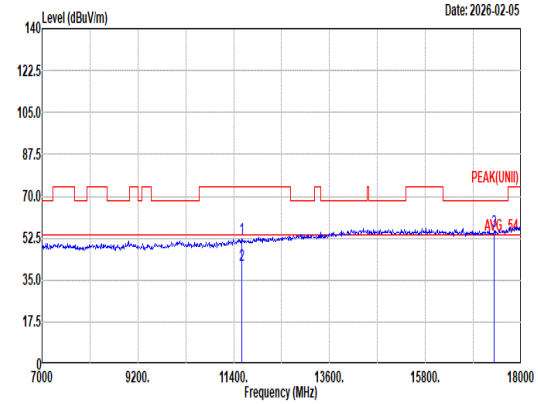 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 52.11 74.00 -21.89 36.52 38.60 19.23 42.83 0.59 -- -- Peak 2 11590.00 41.35 54.00 -12.65 25.76 38.60 19.23 42.83 0.59 -- -- Average 3 17385.00 55.70 68.20 -12.50 36.16 40.30 23.67 45.18 0.75 -- -- Peak

Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	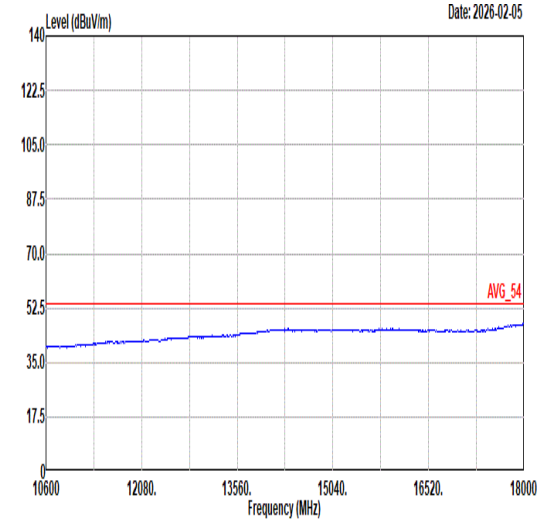 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	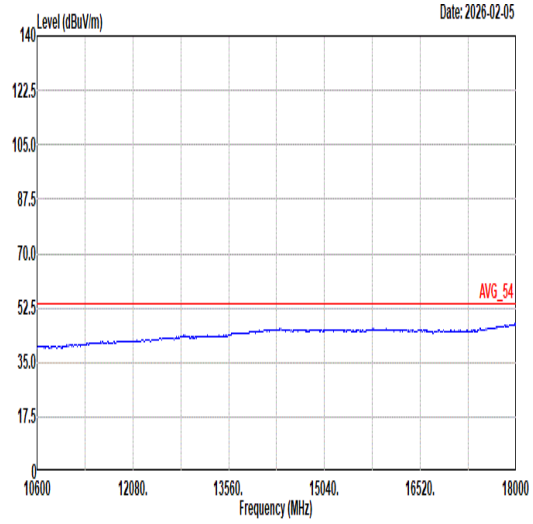 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	62	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Partial_242/62RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	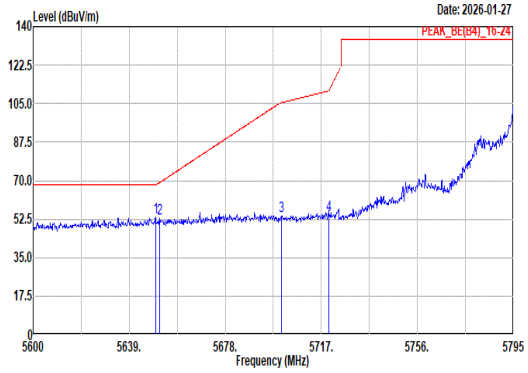 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.73 53.15 68.20 -15.05 44.65 33.30 13.27 38.07 0.00 100 12 Peak 2 5651.48 52.88 69.30 -16.42 44.38 33.31 13.26 38.07 0.00 100 12 Peak 3 5700.82 53.74 105.43 -51.69 44.87 33.80 13.13 38.06 0.00 100 12 Peak 4 5720.12 54.46 111.07 -56.61 45.63 33.80 13.08 38.05 0.00 100 12 Peak	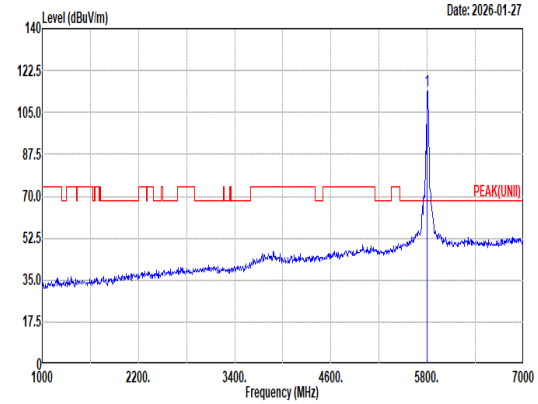 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 113.94 ------ ------ 105.29 33.79 12.89 38.03 0.00 100 12 Peak
Avg	Blank	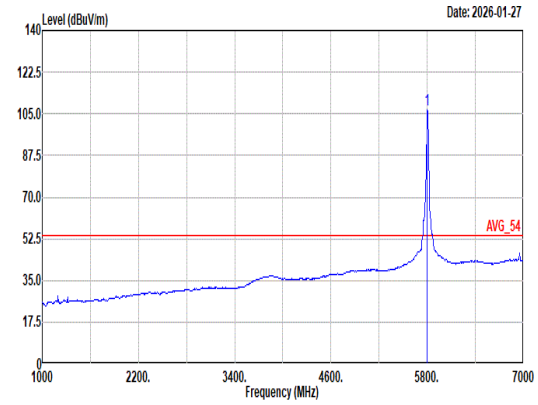 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 106.96 ------ ------ 98.33 33.80 12.86 38.03 0.00 100 12 Average

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Partial_242/62RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	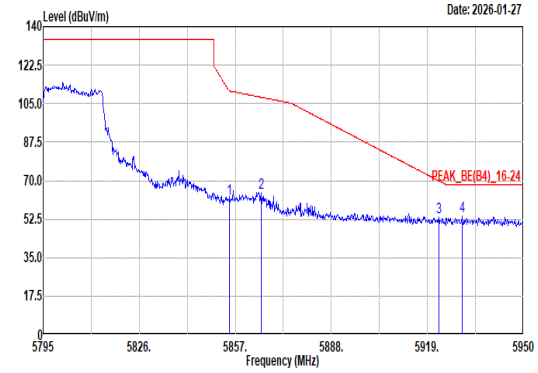 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 61.90 110.83 -48.93 53.10 33.71 13.11 38.02 0.00 100 12 Peak 2 5865.37 64.33 107.89 -43.56 55.46 33.73 13.16 38.02 0.00 100 12 Peak 3 5922.72 53.51 69.88 -16.37 44.34 33.75 13.42 38.00 0.00 100 12 Peak 4 5930.16 53.65 68.20 -14.55 44.45 33.74 13.46 38.00 0.00 100 12 Peak	Blank

Mode	62
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Partial_242/62RU_5795MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	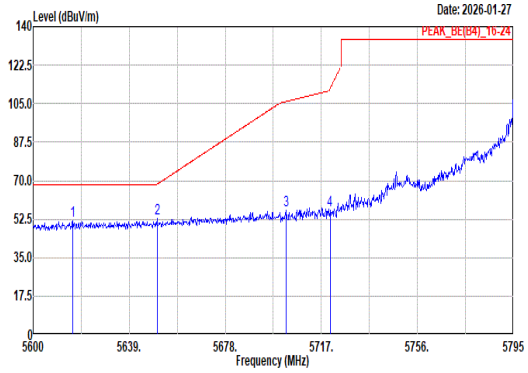 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5616.19 51.72 68.20 -16.48 43.41 33.03 13.36 38.08 0.00 222 351 Peak 2 5650.31 52.76 68.43 -15.67 44.27 33.30 13.26 38.07 0.00 222 351 Peak 3 5702.57 56.43 105.92 -49.49 47.57 33.80 13.12 38.06 0.00 222 351 Peak 4 5720.51 56.59 111.96 -55.37 47.77 33.80 13.07 38.05 0.00 222 351 Peak	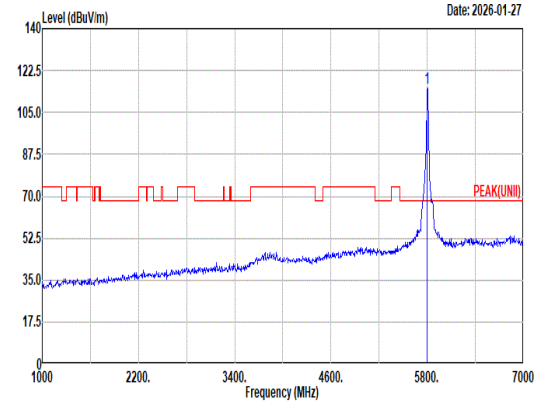 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 115.35 ------ ------ 106.68 33.78 12.92 38.03 0.00 222 351 Peak
Avg	Blank	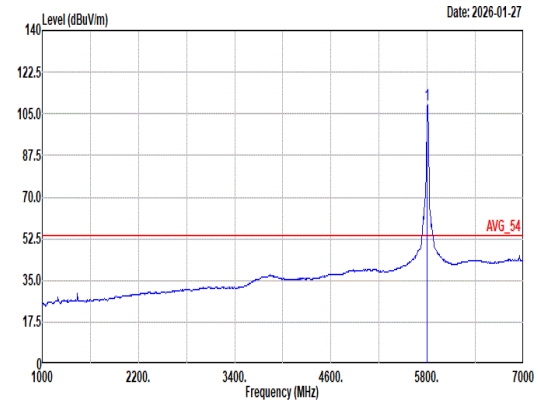 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 108.72 ------ ------ 100.05 33.78 12.92 38.03 0.00 222 351 Average

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT40_CH159_Partial_242/62RU_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	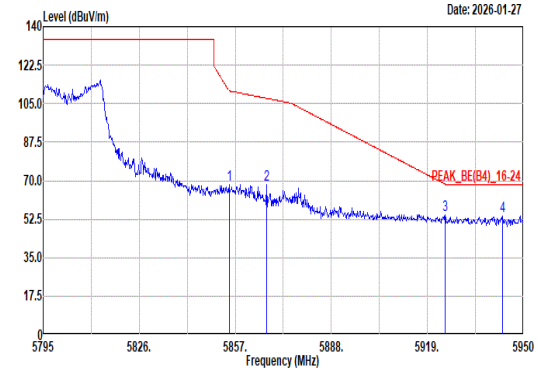 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 68.41 110.83 -42.42 59.61 33.71 13.11 38.02 0.00 222 351 Peak 2 5867.23 68.07 107.37 -39.30 59.18 33.73 13.17 38.01 0.00 222 351 Peak 3 5924.74 54.49 68.40 -13.91 45.31 33.75 13.43 38.00 0.00 222 351 Peak 4 5943.18 53.70 68.20 -14.50 44.46 33.71 13.52 37.99 0.00 222 351 Peak	Blank

Mode	63
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	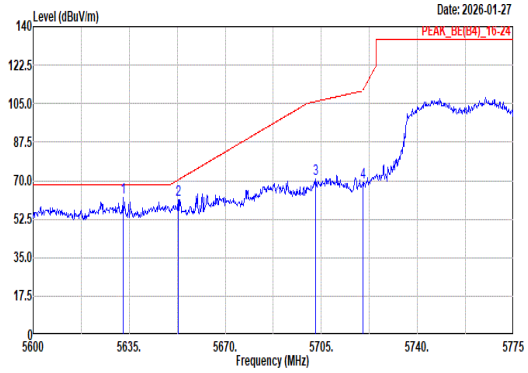 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.73 62.53 68.20 -5.67 54.14 33.16 13.31 38.08 0.00 100 0 Peak 2 5652.85 61.20 70.32 -9.12 52.68 33.33 13.26 38.07 0.00 100 0 Peak 3 5702.90 70.86 106.01 -35.15 62.00 33.80 13.12 38.06 0.00 100 0 Peak 4 5720.23 68.98 111.31 -42.33 60.15 33.80 13.08 38.05 0.00 100 0 Peak	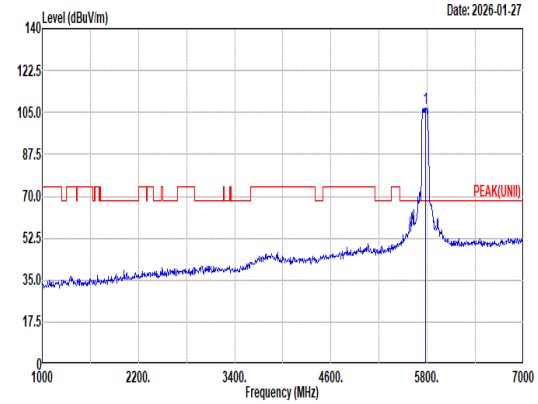 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 106.96 ------ ------ 98.29 33.80 12.91 38.04 0.00 100 0 Peak
Avg	Blank	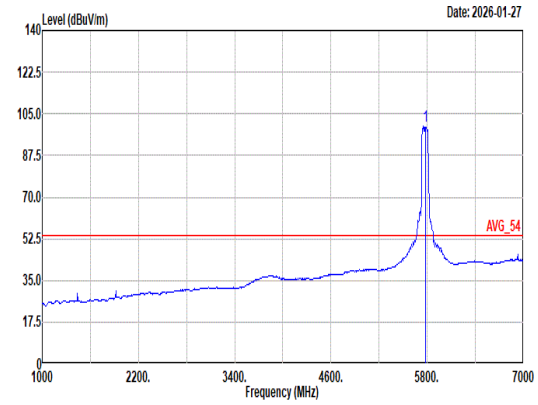 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 99.62 ------ ------ 90.86 33.80 13.01 38.05 0.00 100 0 Average

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	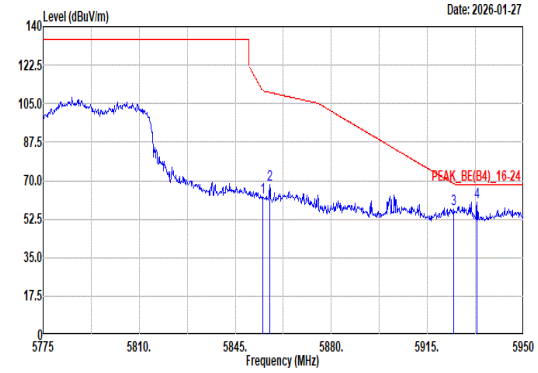 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 62.42 110.86 -48.44 53.62 33.71 13.11 38.02 0.00 100 0 Peak 2 5857.60 68.26 110.07 -41.81 59.44 33.72 13.12 38.02 0.00 100 0 Peak 3 5924.63 57.24 68.48 -11.24 48.06 33.75 13.43 38.00 0.00 100 0 Peak 4 5933.03 60.18 68.20 -8.02 50.98 33.73 13.47 38.00 0.00 100 0 Peak	Blank

Mode	63
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	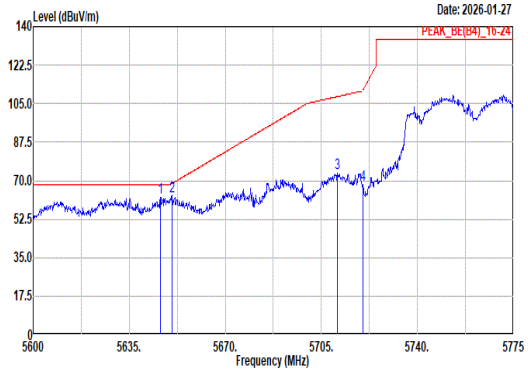 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.38 62.35 68.20 -5.85 53.88 33.27 13.27 38.07 0.00 107 360 Peak 2 5650.58 62.82 68.63 -5.81 54.32 33.31 13.26 38.07 0.00 107 360 Peak 3 5710.95 73.28 108.27 -34.99 64.44 33.80 13.10 38.06 0.00 107 360 Peak 4 5720.23 68.27 111.31 -43.04 59.44 33.80 13.08 38.05 0.00 107 360 Peak	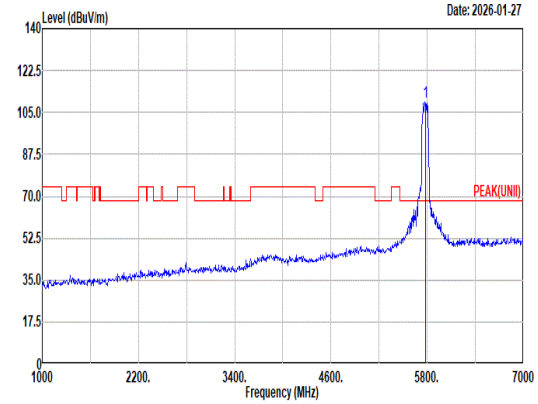 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 109.17 ------ ------ 100.47 33.80 12.94 38.04 0.00 107 360 Peak
Avg	Blank	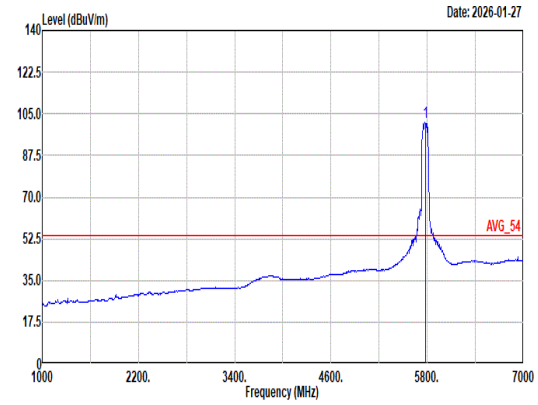 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 101.20 ------ ------ 92.50 33.80 12.94 38.04 0.00 107 360 Average

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	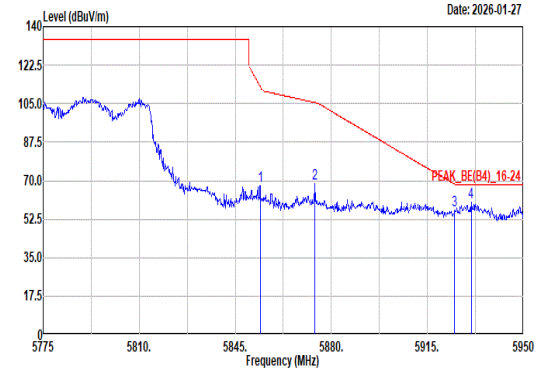 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.10 67.66 112.85 -45.19 58.86 33.71 13.11 38.02 0.00 107 360 Peak 2 5874.05 68.51 105.47 -36.96 59.57 33.75 13.20 38.01 0.00 107 360 Peak 3 5924.98 56.60 68.22 -11.62 47.42 33.75 13.43 38.00 0.00 107 360 Peak 4 5930.93 60.48 68.20 -7.72 51.28 33.74 13.46 38.00 0.00 107 360 Peak	Blank

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	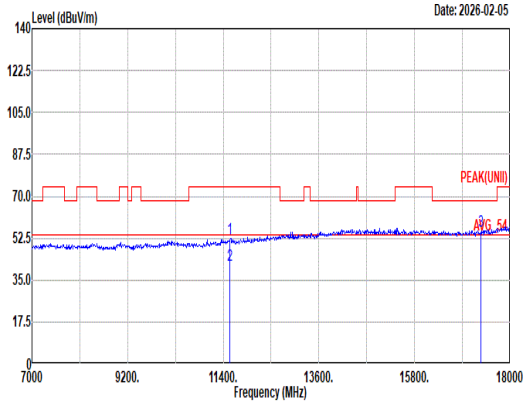 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 52.12 74.00 -21.88 36.55 38.60 19.18 42.80 0.59 -- -- Peak 2 11550.00 41.22 54.00 -12.78 25.65 38.60 19.18 42.80 0.59 -- -- Average 3 17325.00 55.45 68.20 -12.75 35.95 40.30 23.61 45.15 0.74 -- -- Peak	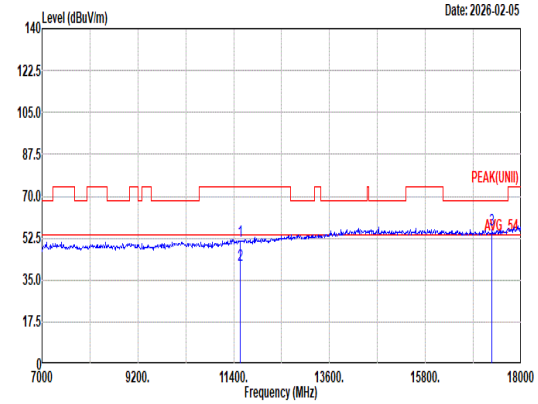 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 51.40 74.00 -22.60 35.83 38.60 19.18 42.80 0.59 -- -- Peak 2 11550.00 41.15 54.00 -12.85 25.58 38.60 19.18 42.80 0.59 -- -- Average 3 17325.00 55.87 68.20 -12.33 36.37 40.30 23.61 45.15 0.74 -- -- Peak

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	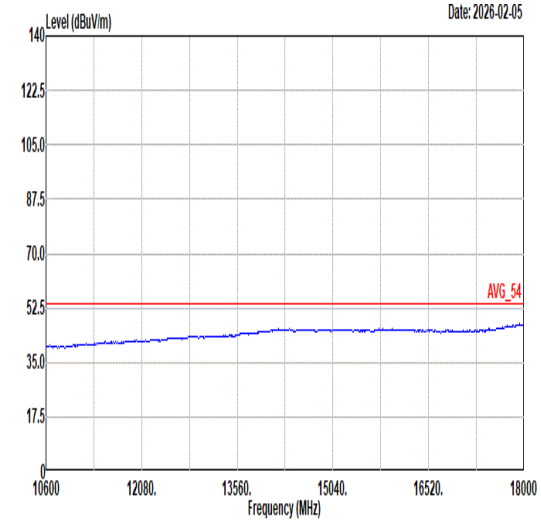 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	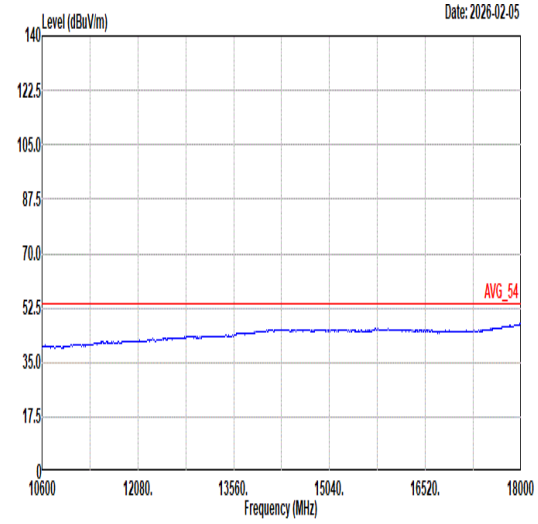 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	64
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/65RU _5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	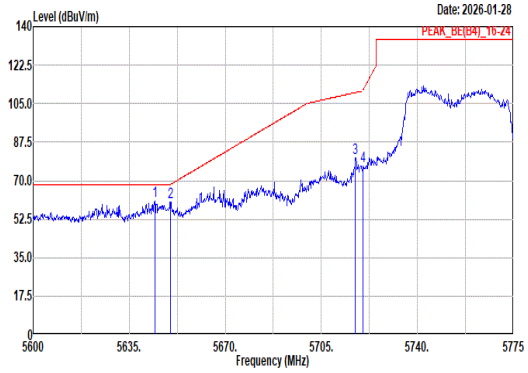 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.28 60.77 68.20 -7.43 52.31 33.25 13.28 38.07 0.00 205 25 Peak 2 5650.05 60.17 68.24 -8.07 51.68 33.30 13.26 38.07 0.00 205 25 Peak 3 5717.43 80.46 110.08 -29.62 71.63 33.80 13.08 38.05 0.00 205 25 Peak 4 5720.23 76.44 111.31 -34.87 67.61 33.80 13.08 38.05 0.00 205 25 Peak	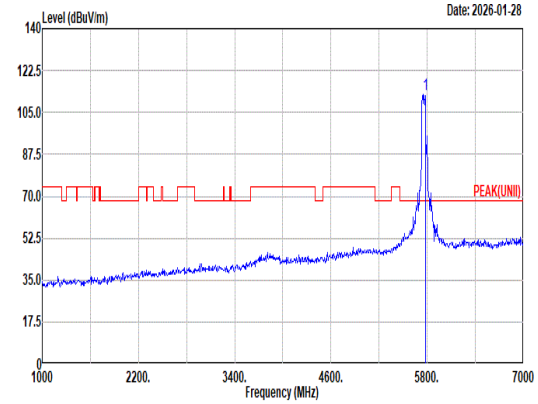 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 112.78 ------ ------ 104.02 33.80 13.01 38.05 0.00 205 25 Peak
Avg	Blank	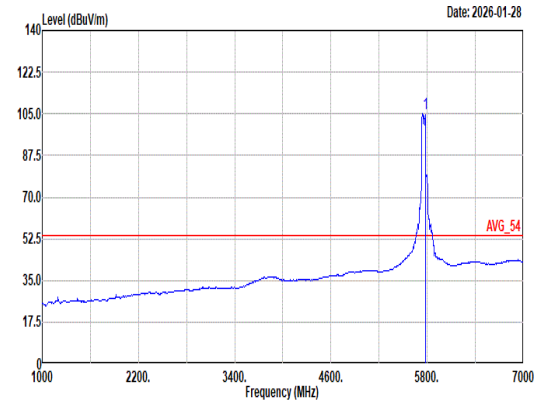 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 104.89 ------ ------ 96.12 33.80 13.02 38.05 0.00 205 25 Average

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/65RU _5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	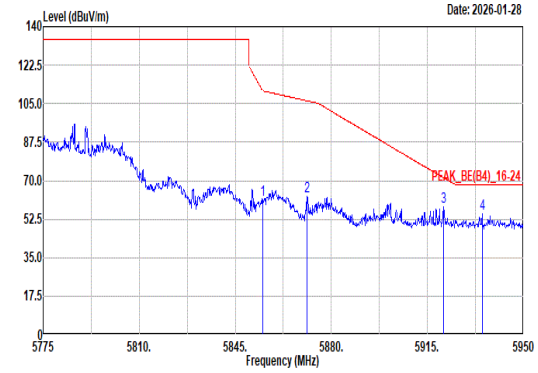 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 61.45 110.86 -49.41 52.65 33.71 13.11 38.02 0.00 205 25 Peak 2 5871.25 62.65 106.25 -43.60 53.73 33.74 13.19 38.01 0.00 205 25 Peak 3 5920.78 57.98 71.31 -13.33 48.80 33.76 13.42 38.00 0.00 205 25 Peak 4 5934.95 55.14 68.20 -13.06 45.93 33.73 13.48 38.00 0.00 205 25 Peak	Blank

Mode	64	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/65RU _5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	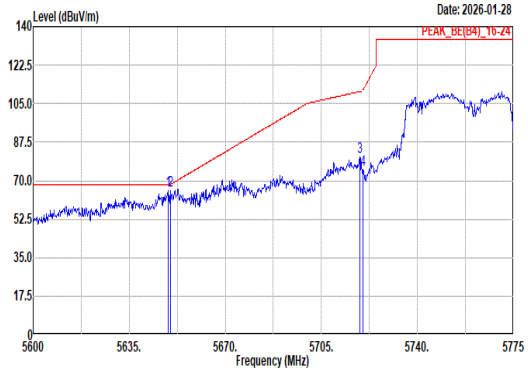 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.18 65.60 68.20 -2.60 57.11 33.29 13.27 38.07 0.00 232 0 Peak 2 5650.05 65.42 68.24 -2.82 56.93 33.30 13.26 38.07 0.00 232 0 Peak 3 5719.00 80.99 110.52 -29.53 72.16 33.80 13.08 38.05 0.00 232 0 Peak 4 5720.23 74.76 111.31 -36.55 65.93 33.80 13.08 38.05 0.00 232 0 Peak	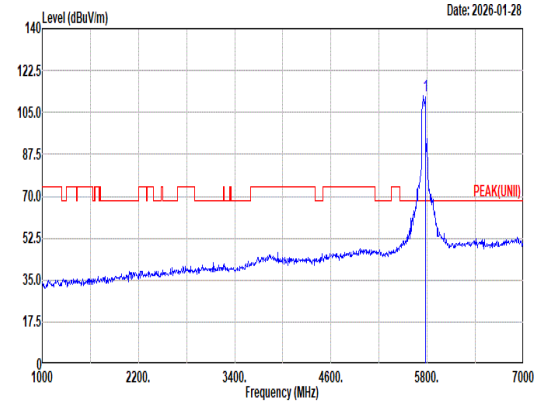 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 112.12 ------ ------ 103.36 33.80 13.01 38.05 0.00 232 0 Peak
Avg	Blank	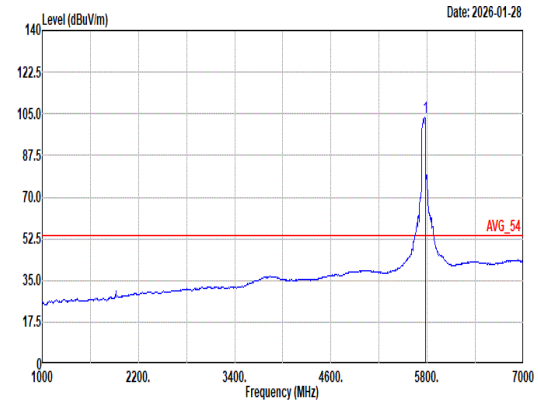 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 103.34 ------ ------ 94.64 33.80 12.94 38.04 0.00 232 0 Average

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/65RU _5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	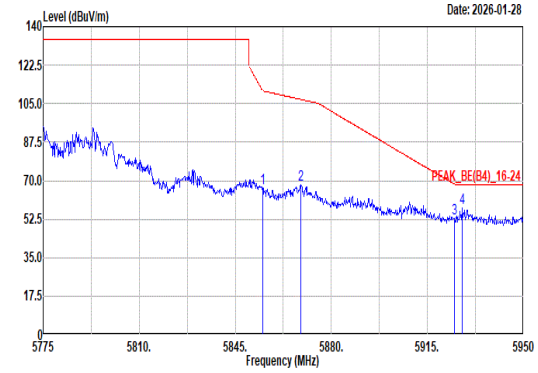 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 66.64 110.86 -44.22 57.84 33.71 13.11 38.02 0.00 232 0 Peak 2 5868.98 68.23 106.88 -38.65 59.32 33.74 13.18 38.01 0.00 232 0 Peak 3 5924.98 52.71 68.22 -15.51 43.53 33.75 13.43 38.00 0.00 232 0 Peak 4 5927.78 57.70 68.20 -10.50 48.51 33.74 13.45 38.00 0.00 232 0 Peak	Blank

Mode	65
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/66RU _5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	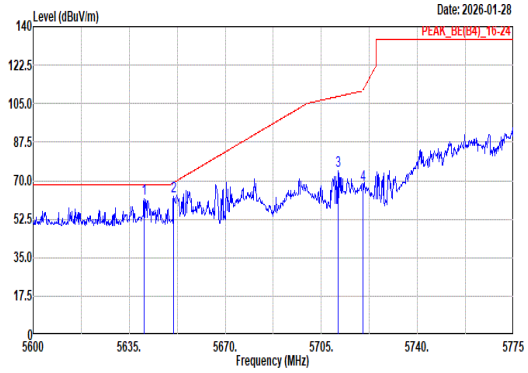 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.43 61.72 68.20 -6.48 53.28 33.22 13.29 38.07 0.00 100 17 Peak 2 5651.28 62.93 69.15 -6.22 54.43 33.31 13.26 38.07 0.00 100 17 Peak 3 5711.13 74.70 108.32 -33.62 65.86 33.80 13.10 38.06 0.00 100 17 Peak 4 5720.05 67.96 110.91 -42.95 59.13 33.80 13.08 38.05 0.00 100 17 Peak	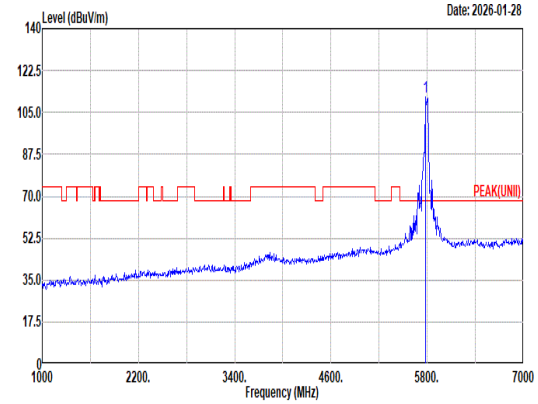 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 111.40 ------ ------ 102.73 33.80 12.91 38.04 0.00 100 17 Peak
Avg	Blank	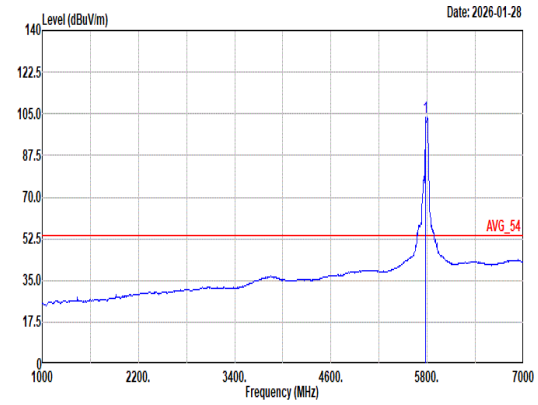 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 103.55 ------ ------ 94.88 33.80 12.91 38.04 0.00 100 17 Average

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/66RU _5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	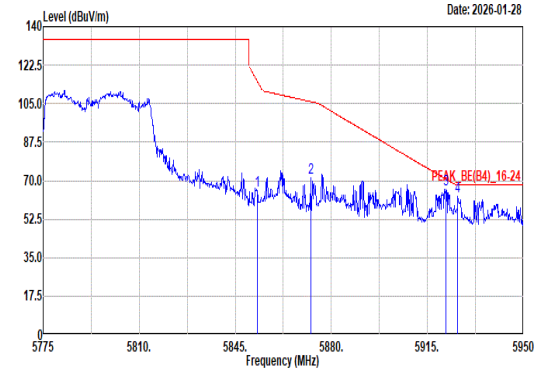 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.05 65.57 115.24 -49.67 56.78 33.71 13.10 38.02 0.00 100 17 Peak 2 5872.48 71.49 105.91 -34.42 62.57 33.74 13.19 38.01 0.00 100 17 Peak 3 5921.83 65.89 70.54 -4.65 56.71 33.76 13.42 38.00 0.00 100 17 Peak 4 5926.03 62.87 68.20 -5.33 53.68 33.75 13.44 38.00 0.00 100 17 Peak	Blank

Mode	65
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/66RU _5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	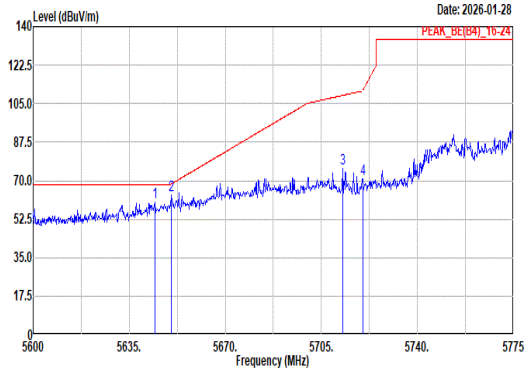 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.45 60.31 68.20 -7.89 51.84 33.26 13.28 38.07 0.00 167 0 Peak 2 5650.23 63.27 68.37 -5.10 54.78 33.30 13.26 38.07 0.00 167 0 Peak 3 5712.70 75.53 108.76 -33.23 66.68 33.80 13.10 38.05 0.00 167 0 Peak 4 5720.05 70.58 110.91 -40.33 61.75 33.80 13.08 38.05 0.00 167 0 Peak	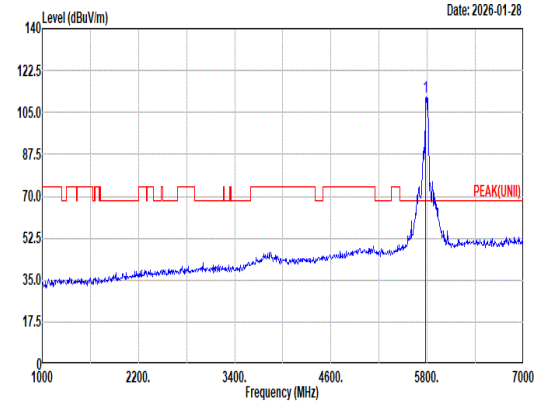 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 111.64 ------ ------ 102.99 33.80 12.89 38.04 0.00 167 0 Peak
Avg	Blank	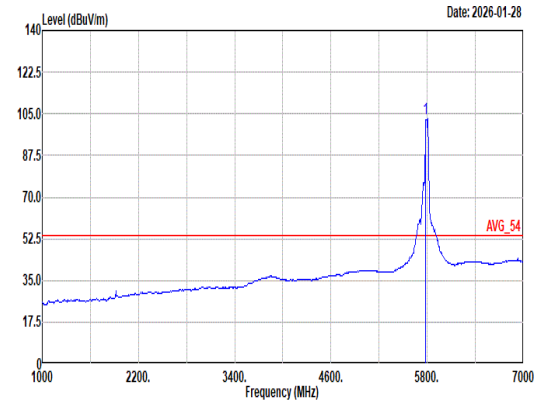 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 103.07 ------ ------ 94.40 33.78 12.92 38.03 0.00 167 0 Average

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_Partial_484/66RU _5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	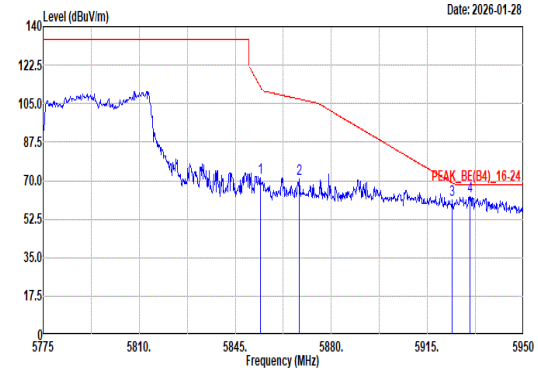 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.10 71.46 112.85 -41.39 62.66 33.71 13.11 38.02 0.00 167 0 Peak 2 5868.28 70.85 107.08 -36.23 61.95 33.74 13.17 38.01 0.00 167 0 Peak 3 5924.10 61.08 68.86 -7.78 51.90 33.75 13.43 38.00 0.00 167 0 Peak 4 5930.58 62.66 68.20 -5.54 53.46 33.74 13.46 38.00 0.00 167 0 Peak	Blank

Mode	143	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 4_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	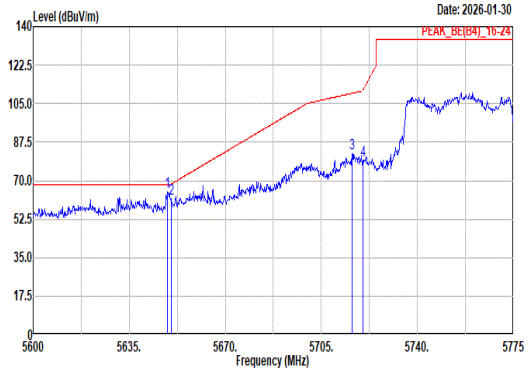 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.00 64.99 68.20 -3.21 56.50 33.29 13.27 38.07 0.00 200 37 Peak 2 5650.40 61.58 68.50 -6.92 53.09 33.30 13.26 38.07 0.00 200 37 Peak 3 5716.20 82.48 109.74 -27.26 73.64 33.80 13.09 38.05 0.00 200 37 Peak 4 5720.23 79.27 111.31 -32.04 70.44 33.80 13.08 38.05 0.00 200 37 Peak	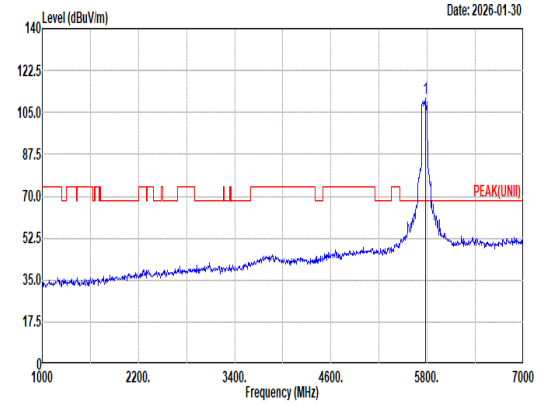 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 111.17 ------ ------ 102.49 33.80 12.92 38.04 0.00 200 37 Peak
Avg	Blank	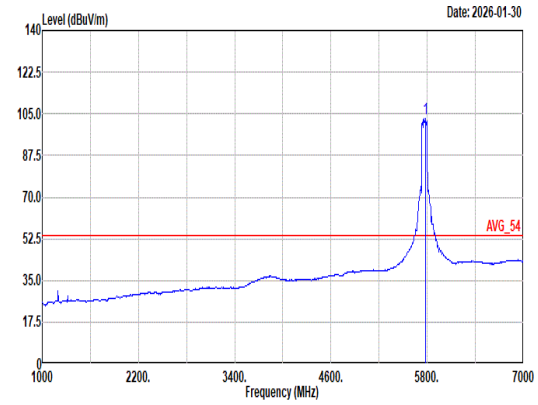 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 103.22 ------ ------ 94.54 33.80 12.92 38.04 0.00 200 37 Average

Mode	143	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 4_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	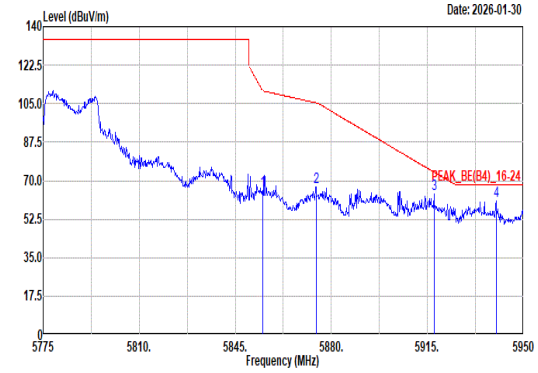 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 65.75 110.86 -45.11 56.95 33.71 13.11 38.02 0.00 200 37 Peak 2 5874.40 67.31 105.37 -38.06 58.37 33.75 13.20 38.01 0.00 200 37 Peak 3 5917.45 64.00 73.77 -9.77 54.83 33.77 13.40 38.00 0.00 200 37 Peak 4 5940.03 60.56 68.20 -7.64 51.34 33.72 13.50 38.00 0.00 200 37 Peak	Blank

Mode	143
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 4_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	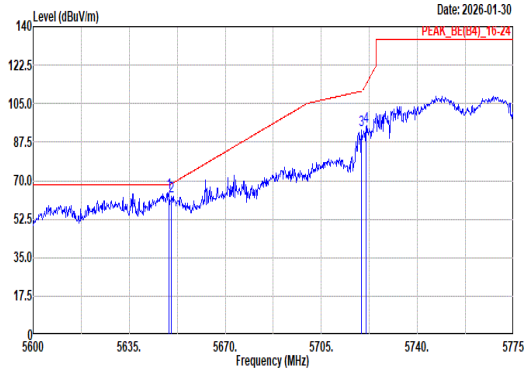 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.35 64.46 68.20 -3.74 55.97 33.29 13.27 38.07 0.00 218 0 Peak 2 5650.40 62.62 68.50 -5.88 54.13 33.30 13.26 38.07 0.00 218 0 Peak 3 5719.53 92.78 110.67 -17.89 83.95 33.80 13.08 38.05 0.00 218 0 Peak 4 5721.28 94.65 113.71 -19.06 85.83 33.80 13.07 38.05 0.00 218 0 Peak	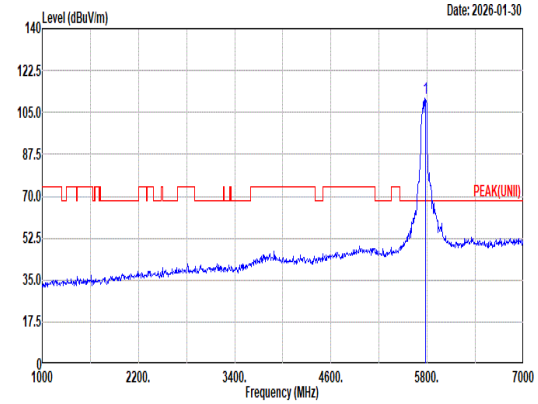 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 110.68 ------ ------ 101.98 33.80 12.94 38.04 0.00 218 0 Peak
Avg	Blank	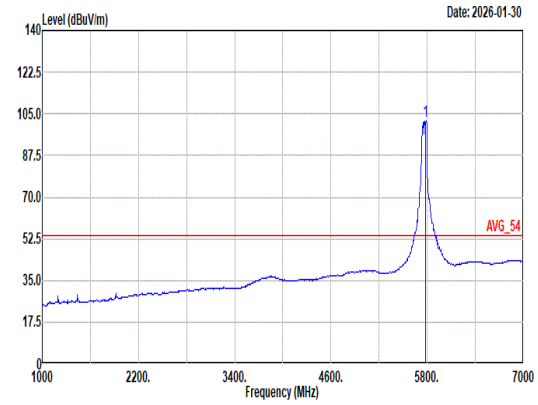 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 101.88 ------ ------ 93.23 33.80 12.89 38.04 0.00 218 0 Average

Mode	143	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 4_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	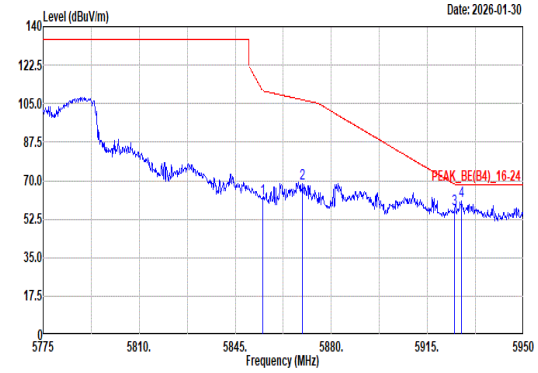 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 61.96 110.86 -48.90 53.16 33.71 13.11 38.02 0.00 218 0 Peak 2 5869.50 68.77 106.74 -37.97 59.86 33.74 13.18 38.01 0.00 218 0 Peak 3 5924.98 57.18 68.22 -11.04 48.00 33.75 13.43 38.00 0.00 218 0 Peak 4 5927.43 60.68 68.20 -7.52 51.48 33.75 13.45 38.00 0.00 218 0 Peak	Blank

Mode	144
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 1_5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	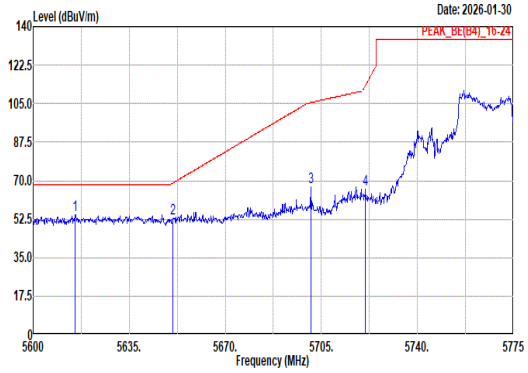 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5615.40 54.48 68.20 -13.72 46.18 33.02 13.36 38.08 0.00 186 35 Peak 2 5650.93 52.83 68.89 -16.06 44.33 33.31 13.26 38.07 0.00 186 35 Peak 3 5701.15 67.19 105.52 -38.33 58.32 33.80 13.13 38.06 0.00 186 35 Peak 4 5721.10 66.18 113.31 -47.13 57.36 33.80 13.07 38.05 0.00 186 35 Peak	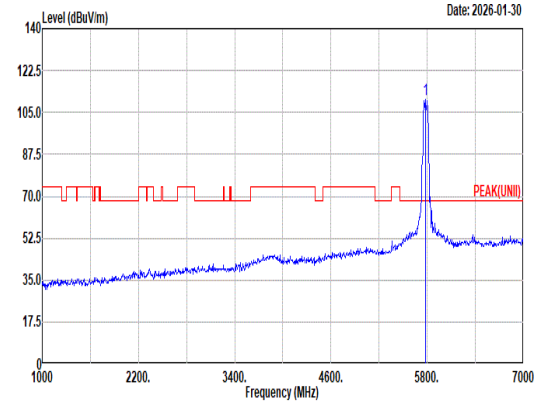 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 110.52 ------ ------ 101.85 33.80 12.91 38.04 0.00 186 35 Peak
Avg	Blank	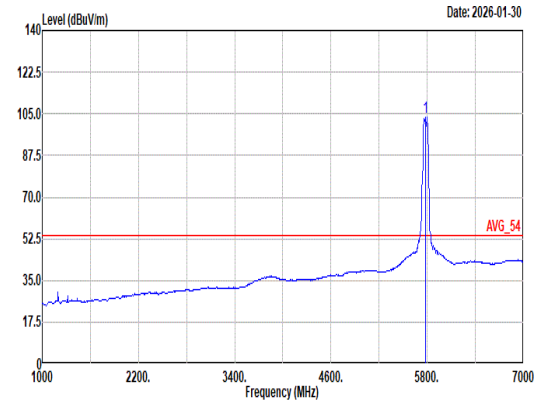 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 103.33 ------ ------ 94.65 33.80 12.92 38.04 0.00 186 35 Average

Mode	144	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 1_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	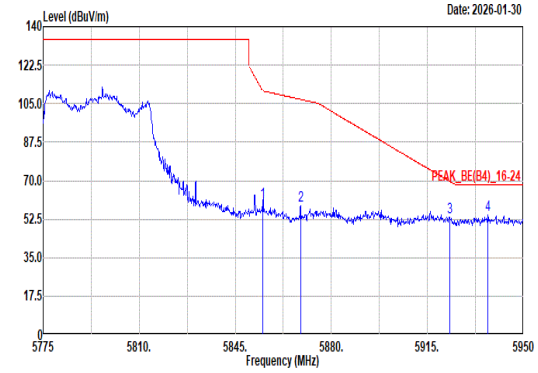 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 60.40 110.86 -50.46 51.60 33.71 13.11 38.02 0.00 186 35 Peak 2 5868.80 58.60 106.93 -48.33 49.69 33.74 13.18 38.01 0.00 186 35 Peak 3 5923.23 53.26 69.51 -16.25 44.08 33.75 13.43 38.00 0.00 186 35 Peak 4 5937.05 54.43 68.20 -13.77 45.21 33.73 13.49 38.00 0.00 186 35 Peak	Blank

Mode	144
	Band Edge - L
	U-NII-3_5.725-5.85_802.11be EHT80_CH155_20MHz Puncture Location 1_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	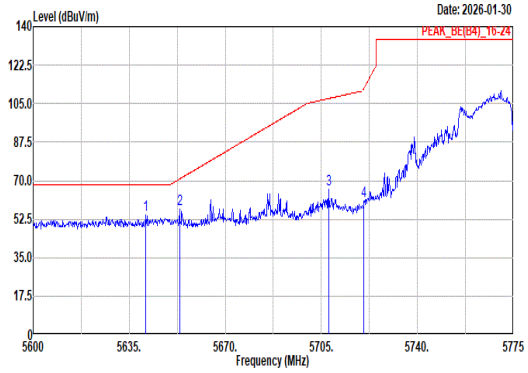 Site : 03CH17-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.13 54.22 68.20 -13.98 45.77 33.23 13.29 38.07 0.00 218 0 Peak 2 5653.38 57.04 70.71 -13.67 48.52 33.33 13.26 38.07 0.00 218 0 Peak 3 5707.63 66.08 107.34 -41.26 57.23 33.80 13.11 38.06 0.00 218 0 Peak 4 5720.58 61.01 112.11 -51.10 52.19 33.80 13.07 38.05 0.00 218 0 Peak	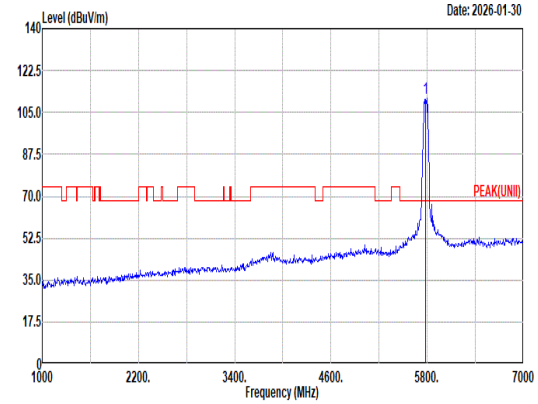 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 110.92 ------ ------ 102.27 33.80 12.88 38.03 0.00 218 0 Peak
Avg	Blank	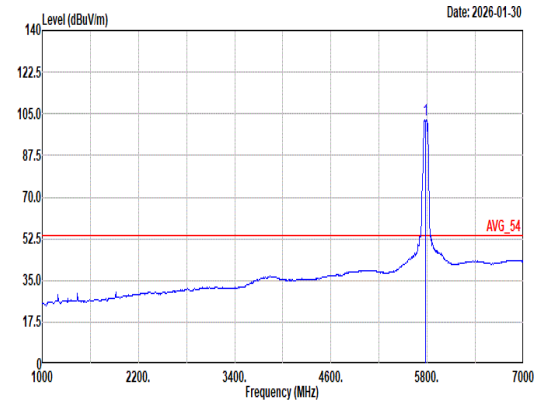 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 102.50 ------ ------ 93.85 33.80 12.89 38.04 0.00 218 0 Average