FCC RADIO TEST REPORT

FCC ID	:	UZ7TCW010
Equipment	:	Touch Computer
Brand Name	:	ZEBRA
Model Name	:	TCW010
Applicant	:	Zebra Technologies Corporation 3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer	:	Zebra Technologies Corporation 3 Overlook Point, Lincolnshire, IL 60069 USA
Standard	:	FCC Part 15 Subpart E §15.407

The product was received on Nov. 28, 2025 and testing was performed from Dec. 11. 2025 to Feb. 15, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Product Specification of Equipment Under Test 6
1.3 Modification of EUT 8
1.4 Testing Location 9
1.5 Applicable Standards 9
2 Test Configuration of Equipment Under Test **10**
2.1 Carrier Frequency and Channel 10
2.2 Test Mode 12
2.3 Connection Diagram of Test System 15
2.4 Support Unit used in test configuration and system 16
2.5 EUT Operation Test Setup 17
2.6 Measurement Results Explanation Example 17
3 Test Result **18**
3.1 26dB & 99% Occupied Bandwidth Measurement 18
3.2 Maximum Conducted Output Power Measurement 19
3.3 Power Spectral Density Measurement 22
3.4 Unwanted Emissions Measurement 24
3.5 AC Conducted Emission Measurement 29
3.6 Antenna Requirements 31
4 List of Measuring Equipment **32**
5 Measurement Uncertainty **33**
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission Test Result
Appendix D. Duty Cycle Plots
Appendix E. Setup Photographs

History of this test report

Report No.	Version	Description	Issue Date
FR5N0610-01E	01	Initial issue of report	Mar. 26, 2026
FR5N0610-01E	02	Revised Product Feature. This report is an updated version, replacing the report issued on Mar. 26, 2026.	Mar. 31, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	1.06 dB under the limit at 5350.05 MHz
3.5	15.207	AC Conducted Emission	Pass	10.98 dB under the limit at 1.446 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Julia Chang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	ZEBRA
Model Name	TCW010
FCC ID	UZ7TCW010
Sample 1	Basic + SE4730(SR500)
Sample 2	Basic + SE56(AC670)
Sample 3	Premium + SE4730(SR500)
Sample 4	Premium + SE56(AC670)
Sample 5	HC_Basic (no scanner)
Sample 6	HC_Premium + SE4730(SR500)
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be ETH20/ ETH 40/ ETH 80/ ETH 160/ ETH 320 Bluetooth BR/EDR/LE
SW Version	15-12-29.00-VG-U00-PRD-ERS-04
FW Version	FUSION_QA_7_1.3.0.002_V
MFD	18-Nov-25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter 1	**Brand Name**	Zebra	**Part Number**	PWR-WUA5V12W0US
Battery 1 (1x)	**Brand Name**	Zebra	**Part Number**	BT-000473-0020
Battery 2 (1.5x)	**Brand Name**	Zebra	**Part Number**	BT-000473-0820
USB TYPE A to TYPE C cable	**Brand Name**	Zebra	**Part Number**	CBL-TC2X-USBC-01
USB TYPE C to TYPE C cable	**Brand Name**	Zebra	**Part Number**	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	**Brand Name**	Zebra	**Part Number**	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack.	**Brand Name**	Zebra	**Part Number**	HDST-35MM-PTVP-02
USB-C to 3.5mm adapter cable	**Brand Name**	Zebra	**Part Number**	ADP-USBC-35MM1-01
HS2100 rugged wired headset	**Brand Name**	Zebra	**Part Number**	HS2100-BTN-LSB
HS2100 Headset Cable for connecting the HS2100 Headset via 3.5mm	**Brand Name**	Zebra	**Part Number**	CBL-HS2100-3MS1-01
Rugged boot	**Brand Name**	Zebra	**Part Number**	SG-TC2L-BOOT-01
Handstrap	**Brand Name**	Zebra	**Part Number**	SG-TC2L-HSTRP1-01
Trigger Handle	**Brand Name**	Zebra	**Model Name**	CRG-TC2L-SNP1-01
Arm Mounts	**Brand Name**	Zebra	**Part Number**	SG-TC2L-ARMNT-01
Soft Holster	**Brand Name**	Zebra	**Part Number**	SG-TC2L-HLSTR1-01
HS3100 rugged Bluetooth headset	**Brand Name**	Zebra	**Part Number**	HS3100-OTH

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Antenna Type	**<Ant. 7>:** IFA Antenna **<Ant. 6>:** IFA Antenna
Antenna Gain	**<5150MHz ~ 5250MHz>：** **<Ant. 7>:** 0.87 dBi **<Ant. 6>:** 0.23 dBi **<5250MHz ~ 5350MHz>：** **<Ant. 7>:** 0.92 dBi **<Ant. 6>:** 0.34 dBi **<5470MHz ~ 5725MHz>：** **<Ant. 7>:** 1.06 dBi **<Ant. 6>:** 0.09 dBi
Type of Modulation	802.11b: DSSS (DBPSK/DQPSK/CCK) 802.11a/g/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096-QAM)

Remark:

1. MIMO Ant. 7+6 Directional Gain is a calculated result from MIMO Ant. 7 and MIMO Ant. 6. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 7 + Ant. 6 is a calculated result from sum of the power MIMO Ant. 7 and MIMO Ant. 6.
3. 802.11be Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = 10 log(NANT/NSS) dB.

$$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;

G_k is the gain in dBi of the kth antenna.

As minimum N_{SS}=1 is supported by EUT, the formula can be simplified as:

Directional gain = $10*\log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi

Where G1, G2….GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Ant 6 (dBi)	Ant 7 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band I	0.23	0.87	0.87	3.57	0.00	0.00
Band II	0.34	0.92	0.92	3.65	0.00	0.00
Band III	0.09	1.06	1.06	3.60	0.00	0.00

Calculation example:

If a device has two antenna, G_{ANT1}= 0.34dBi; G_{ANT2}=0.92dBi

Directional gain of power measurement = max(0.34, 0.92) = 0.92 dBi

Directional gain of PSD derived from formula which is

10 x log { { [10^ (0.34 dBi / 20) + 10^ (0.92 dBi / 20)] ^ 2 } / 2 }

= 3.65 dBi

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- FCC Part 15 Subpart E
- ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The device WIFI MIMO support 1S2T (CDD & Tx Beamforming) (Nss=1) mode by manufacturer declared.

The device supports 1S2T (CDD & Tx Beamforming);1S2T: Nss=1, MIMO 2Tx

802.11be support full RU tone and partial RU tone, both full RU and partial are tested for conducted power/PSD in appendix A, for Channel Mask in section 3.4.5, all the other test case were performed with full RU with its maximum power/PSD.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50@	5250
5470-5725 MHz	114@	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 , 802.11ac VHT40 , 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 , 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 , 802.11ax HE160 and 802.11be EHT160.

2.2 Test Mode

This device support 26/52/106/242/484/996/2*996-tone RU ,M-RU and channel puncture.

The PSD of partial RU, M-RU and channel puncture are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel , 996-tone RU is covered by 80MHz channel and 2*996-tone RU is covered by 160MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11an, 802.11ac and 802.11ax mode are smaller than 802.11be mode, so all other conducted test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT 40	MCS0
802.11be EHT 80	MCS0
802.11be EHT 160	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 5G link + BT Idle with HS3100 BT headset + Scanner + 1.5xBattery + USB cable data link with Notebook + Copy data from NB to EDA(eMMC)

Remark:
1. The detailed Radiated test modes are shown in Appendix C.
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	120
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11be EHT20	802.11be EHT20	802.11be EHT20
L	Low	36	52	100
M	Middle	44	60	120
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	38	54	102
M	Middle	-	-	118
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz	5470-5725MHz
	802.11be EHT160	802.11be EHT160
Ch. #	50	114

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

This device supports WiFi 7 puncturing and Multi RU features.

80M channel puncturing 20M M-RU_RU484+RU242	-	242	484		-	-	-	-
	242	-	484		-	-	-	-
	484		-	242	-	-	-	-
	484		242	-	-	-	-	-
160M channel puncturing 20M M-RU_RU996+RU484+RU242	-	242	484		996			
	242	-	484		996			
	484		-	242	996			
	484		242	-	996			
	996				-	242	484	
	996				242	-	484	
	996				484		-	242
	996				484		242	-
160M channel puncturing 40M M-RU_RU996+RU484	-		484		996			
	484		-		996			
	996				-		484	
	996				484		-	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

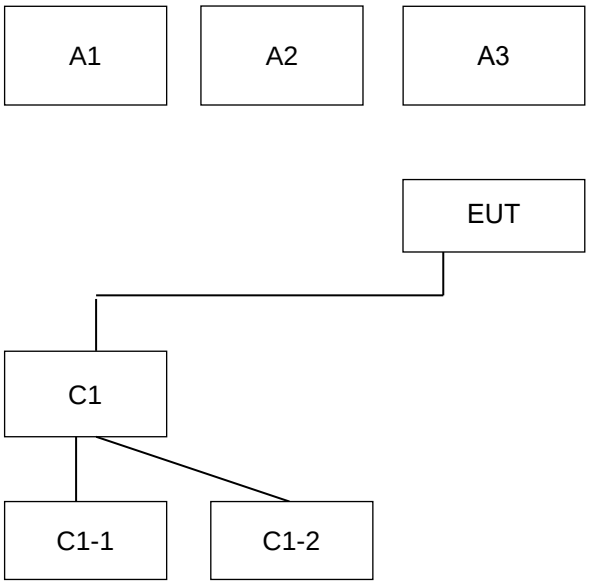

Conduction Test Setup									
No.	**Wireless Station**	**Connection Type**	**Test Mode**						
			1						
A1	BT Earphone	Bluetooth	**X**						
A2	AP router	WiFi	**X**						
A3	Bar code	scanner	**X**						
No.	**Power Source**	**Connection Type**	**1**						
No.	**Setup Peripherals**	**Connection Type**	**1**						
C1	Notebook	USB Cable	**X**						
C1-1	IPod	USB Cable to C1	**X**						
C1-2	AP router	RJ-45 Cable to C1	**X**						

< Radiation Emission Mode>

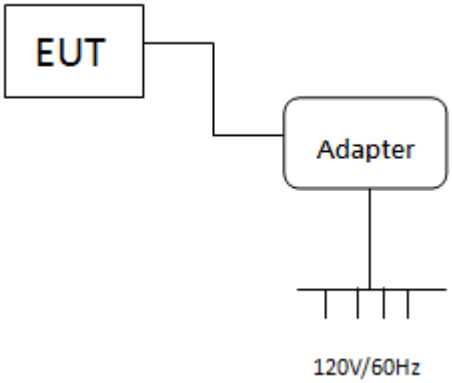

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded,1.8m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P：Unshielded, 1.2m DC O/P：Shielded, 1.8m
3.	iPod	Apple	A1199	DoC	Shielded, 1.0m	N/A

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Version 4.0.171.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules **v02r01**, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
8. Measure and record the results in the test report.

3.1.4 Test Setup

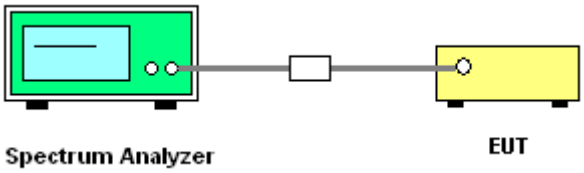

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

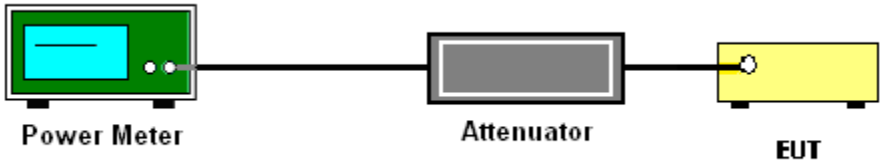

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW ≥ 3 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

   Method (a): Measure and sum the spectra across the outputs.

   The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

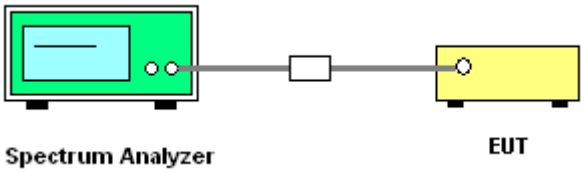

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of –27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".

3.4.4 Test Setup

For radiated emissions below 30MHz

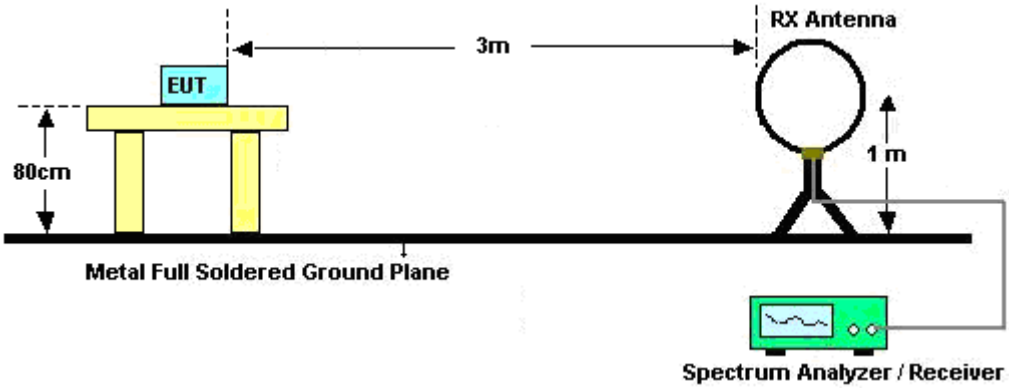

For radiated emissions from 30MHz to 1GHz

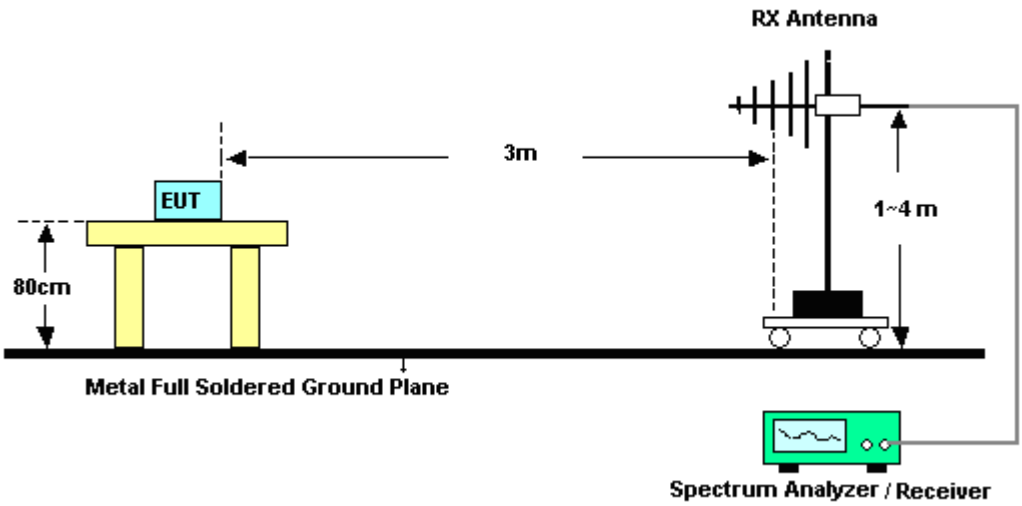

For radiated test from 1GHz to 18GHz

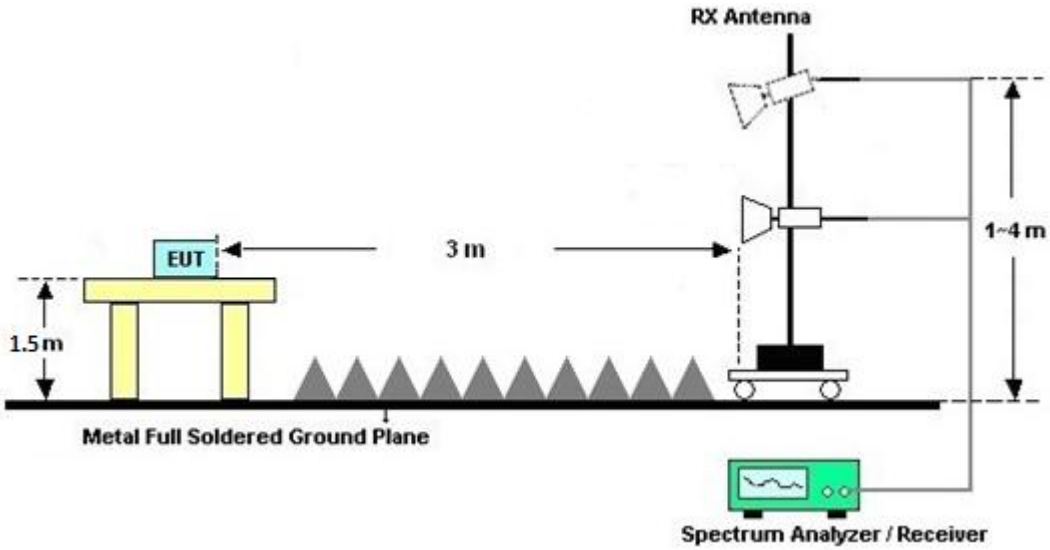

For radiated test above 18GHz

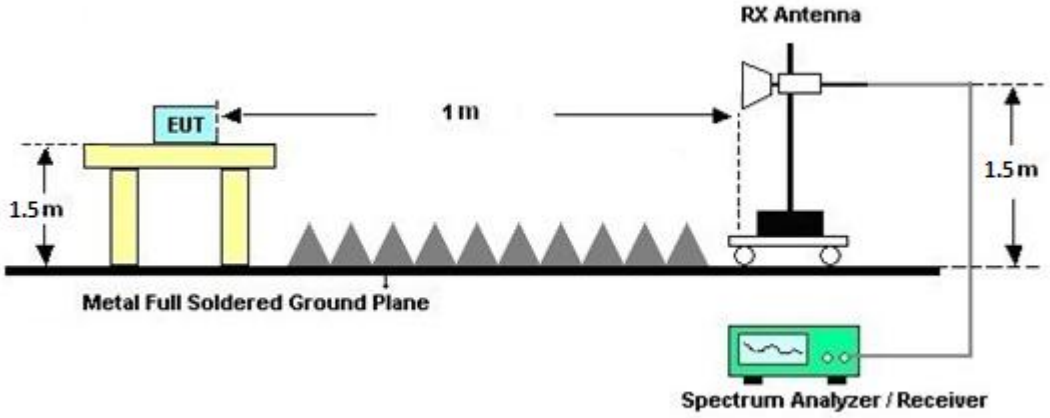

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

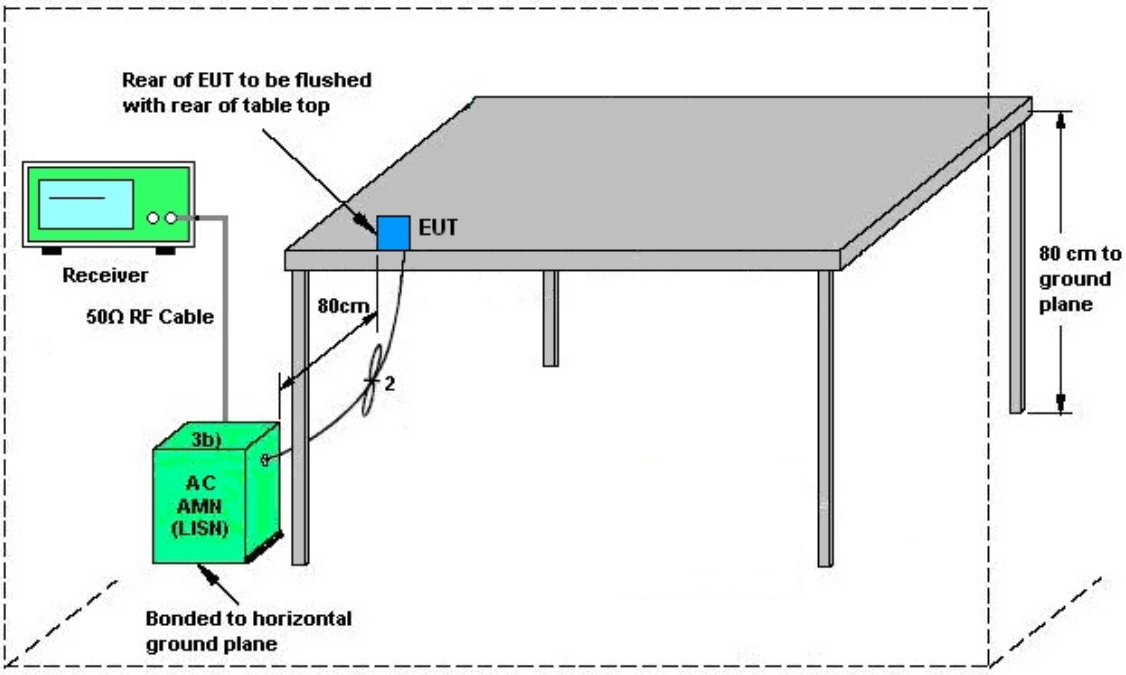

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	KV2D06A18ES	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Jul. 01, 2026	Radiation (03CH17-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 25, 2026	Radiation (03CH17-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Dec. 10, 2026	Radiation (03CH17-HY)
Amplifier	EMCI	EMC118A45SE	980791	1GHz-18GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 25, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Aug. 24, 2026	Radiation (03CH17-HY)
Amplifier	SONOMA	310N	432035	9kHz ~ 1GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
EXA Signal Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 06, 2026	Radiation (03CH17-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 15, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Oct. 14, 2026	Radiation (03CH17-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/EMC101Y-KM-KM-1000/ EMC101Y-KM-KM-9000	04613/2,240904,240915	30MHz~40GHz	Nov. 05, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Nov. 04, 2026	Radiation (03CH17-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Dec.31, 2025 ~ Feb. 15, 2026	Mar. 30, 2026	Radiation (03CH17-HY)
Software	Audix	E3	RK-002469	N/A	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec.31, 2025 ~ Feb. 15, 2026	N/A	Radiation (03CH17-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 11. 2025~Jan. 31. 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Dec. 11. 2025~Jan. 31. 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 11. 2025~Jan. 31. 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 11. 2025~Jan. 31. 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 11. 2025~Jan. 31. 2026	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 15, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 15, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Dec. 15, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Dec. 15, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Dec. 15, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Dec. 15, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Dec. 15, 2025	Feb. 12, 2026	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.5 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.7 dB

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.6 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.1 dB

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/12/11~2026/1/31	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO													
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	36	5180	18.12	17.34	20.76	24.00		0.87			Pass
11a	6Mbps	2	44	5220	19.49	19.11	22.31	24.00		0.87			Pass
11a	6Mbps	2	48	5240	19.78	19.74	22.77	24.00		0.87			Pass
HT20	MCS0	2	36	5180	17.47	16.81	20.16	24.00		0.87			Pass
HT20	MCS0	2	44	5220	18.91	18.29	21.62	24.00		0.87			Pass
HT20	MCS0	2	48	5240	19.18	18.97	22.09	24.00		0.87			Pass
HT40	MCS0	2	38	5190	15.86	15.48	18.68	24.00		0.87			Pass
HT40	MCS0	2	46	5230	17.84	17.41	20.64	24.00		0.87		-	Pass
VHT20	MCS0	2	36	5180	17.48	16.86	20.19	24.00		0.87			Pass
VHT20	MCS0	2	44	5220	18.91	18.36	21.65	24.00		0.87			Pass
VHT20	MCS0	2	48	5240	19.19	18.88	22.05	24.00		0.87			Pass
VHT40	MCS0	2	38	5190	15.79	15.38	18.60	24.00		0.87			Pass
VHT40	MCS0	2	46	5230	17.81	17.42	20.63	24.00		0.87			Pass
VHT80	MCS0	2	42	5210	16.15	15.48	18.84	24.00		0.87			Pass
VHT160	MCS0	2	50	5250	16.21	16.23	19.23	24.00		0.87			Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	36	5180	17.90	17.19	33.58	23.45	-		22.35		-	
11a	6Mbps	2	44	5220	18.92	17.16	40.42	23.64	-		22.35			
11a	6Mbps	2	48	5240	18.84	17.20	38.70	23.77	-		22.35			

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	36	5180	0.04	0.04	-		8.80	11.00		3.57		-	Pass
11a	6Mbps	2	44	5220	0.04	0.04			9.67	11.00		3.57			Pass
11a	6Mbps	2	48	5240	0.04	0.04			9.99	11.00		3.57			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	52	5260	19.88	19.65	22.78	23.98		0.92		30	Pass
11a	6Mbps	2	60	5300	19.78	19.71	22.76	23.98		0.92		30	Pass
11a	6Mbps	2	64	5320	18.64	18.43	21.55	23.98		0.92		30	Pass
HT20	MCS0	2	52	5260	18.28	18.02	21.16	23.98		0.92		30	Pass
HT20	MCS0	2	60	5300	19.11	18.94	22.04	23.98		0.92		30	Pass
HT20	MCS0	2	64	5320	18.28	17.59	20.96	23.98		0.92		30	Pass
HT40	MCS0	2	54	5270	18.62	18.36	21.50	23.98		0.92		30	Pass
HT40	MCS0	2	62	5310	17.43	17.19	20.32	23.98		0.92		30	Pass
VHT20	MCS0	2	52	5260	18.32	18.05	21.20	23.98		0.92		30	Pass
VHT20	MCS0	2	60	5300	19.13	19.07	22.11	23.98		0.92		30	Pass
VHT20	MCS0	2	64	5320	18.32	17.62	20.99	23.98		0.92		30	Pass
VHT40	MCS0	2	54	5270	18.65	18.39	21.53	23.98		0.92		30	Pass
VHT40	MCS0	2	62	5310	17.39	17.21	20.31	23.98		0.92		30	Pass
VHT80	MCS0	2	58	5290	16.37	16.21	19.30	23.98		0.92		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	52	5260	18.93	17.20	39.17	24.26	23.35		29.35		23.98		-
11a	6Mbps	2	60	5300	18.78	17.25	38.95	23.84	23.37		29.37		23.98		
11a	6Mbps	2	64	5320	17.59	17.16	24.58	22.96	23.34		29.34		23.98		

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)				Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7			
11a	6Mbps	2	52	5260	0.04	0.04	-		10.03	11.00		3.65		-		Pass
11a	6Mbps	2	60	5300	0.04	0.04			10.05	11.00		3.65				Pass
11a	6Mbps	2	64	5320	0.04	0.04			9.94	11.00		3.65				Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO													
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	100	5500	19.11	18.87	22.00	23.98		1.06		30	Pass
11a	6Mbps	2	116	5580	19.97	19.73	22.86	23.98		1.06		30	Pass
11a	6Mbps	2	140	5700	18.25	18.43	21.35	23.98		1.06		30	Pass
HT20	MCS0	2	100	5500	18.44	18.49	21.48	23.98		1.06		30	Pass
HT20	MCS0	2	116	5580	19.25	18.71	22.00	23.98		1.06		30	Pass
HT20	MCS0	2	140	5700	18.67	18.72	21.71	23.98		1.06		30	Pass
HT40	MCS0	2	102	5510	17.58	17.53	20.57	23.98		1.06		30	Pass
HT40	MCS0	2	110	5550	18.58	18.54	21.57	23.98		1.06		30	Pass
HT40	MCS0	2	134	5670	18.48	18.33	21.42	23.98		1.06		30	Pass
VHT20	MCS0	2	100	5500	18.48	18.51	21.51	23.98		1.06		30	Pass
VHT20	MCS0	2	116	5580	19.25	18.72	22.00	23.98		1.06		30	Pass
VHT20	MCS0	2	140	5700	18.69	18.75	21.73	23.98		1.06		30	Pass
VHT40	MCS0	2	102	5510	17.61	17.55	20.59	23.98		1.06		30	Pass
VHT40	MCS0	2	110	5550	18.68	18.58	21.64	23.98		1.06		30	Pass
VHT40	MCS0	2	134	5670	18.52	18.44	21.49	23.98		1.06		30	Pass
VHT80	MCS0	2	106	5530	16.69	16.87	19.79	23.98		1.06		30	Pass
VHT80	MCS0	2	122	5610	18.53	18.21	21.38	23.98		1.06		30	Pass
VHT160	MCS0	2	114	5570	15.92	15.28	18.62	23.98		1.06		30	Pass

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	144	5720	19.25	19.58	22.43	23.98		1.06		30	Pass
HT20	MCS0	2	144	5720	18.58	18.66	21.63	23.98		1.06		30	Pass
HT40	MCS0	2	142	5710	18.52	18.65	21.60	23.98		1.06		30	Pass
VHT20	MCS0	2	144	5720	18.44	18.72	21.59	23.98		1.06		30	Pass
VHT40	MCS0	2	142	5710	18.49	18.68	21.60	23.98		1.06		30	Pass
VHT80	MCS0	2	138	5690	18.58	18.35	21.48	23.98		1.06		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
11a	6Mbps	2	100	5500	17.54	17.17	25.37	23.58	23.35		29.35		23.98		----	----
11a	6Mbps	2	116	5580	17.57	17.13	24.58	23.54	23.34		29.34		23.98		----	----
11a	6Mbps	2	140	5700	17.47	17.16	24.23	23.28	23.35		29.35		23.98		----	----

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
11a	6Mbps	2	144	5720	13.93	13.61	17.26	16.76	23.35		29.35		23.98		3.3	3.265
6dB Bandwidth Limit ≧ 500kHz															Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	100	5500	0.04	0.04	-		10.30	11.00		3.60		-	Pass
11a	6Mbps	2	116	5580	0.04	0.04			10.25	11.00		3.60			Pass
11a	6Mbps	2	140	5700	0.04	0.04			9.78	11.00		3.60			Pass

U-NII-2C straddle channel MIMO															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	144	5720	0.04	0.04	-		9.78	11.00		3.60		-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	36	5180	Full	17.56	16.94	20.27	24.00		0.87		-	Pass
HE20	MCS0	2	36	5180	26/0	7.91	7.07	10.52	24.00		0.87			Pass
HE20	MCS0	2	36	5180	52/37	10.41	9.54	13.01	24.00		0.87			Pass
HE20	MCS0	2	36	5180	106/53	13.51	12.58	16.08	24.00		0.87			Pass
HE20	MCS0	2	44	5220	Full	18.91	18.38	21.66	24.00		0.87			Pass
HE20	MCS0	2	44	5220	26/4	9.21	8.45	11.86	24.00		0.87			Pass
HE20	MCS0	2	44	5220	52/38	11.31	10.78	14.06	24.00		0.87			Pass
HE20	MCS0	2	44	5220	106/53	14.18	13.21	16.73	24.00		0.87			Pass
HE20	MCS0	2	48	5240	Full	19.22	18.91	22.08	24.00		0.87			Pass
HE20	MCS0	2	48	5240	26/8	8.53	8.05	11.31	24.00		0.87			Pass
HE20	MCS0	2	48	5240	52/40	11.33	10.97	14.16	24.00		0.87			Pass
HE20	MCS0	2	48	5240	106/54	14.21	13.85	17.04	24.00		0.87			Pass
HE40	MCS0	2	38	5190	Full	15.87	15.39	18.65	24.00		0.87			Pass
HE40	MCS0	2	38	5190	242/61	12.24	11.31	14.81	24.00		0.87			Pass
HE40	MCS0	2	46	5230	Full	17.86	17.38	20.64	24.00		0.87			Pass
HE40	MCS0	2	46	5230	242/62	14.96	13.97	17.50	24.00		0.87			Pass
HE80	MCS0	2	42	5210	Full	16.18	15.51	18.87	24.00		0.87			Pass
HE80	MCS0	2	42	5210	484/65	12.81	11.82	15.35	24.00		0.87			Pass
HE160	MCS0	2	50	5250	Full	16.13	16.17	19.16	24.00		0.87			Pass
HE160	MCS0	2	50	5250	996/67	13.14	12.76	15.96	24.00		0.87			Pass
HE160	MCS0	2	50	5250	996/S67	12.68	11.71	15.23	24.00		0.87			Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	36	5180	Full	0.00	0.00			6.95	11.00		3.57			Pass
HE20	MCS0	2	36	5180	26/0	0.02	0.02			5.62	11.00		3.57			Pass
HE20	MCS0	2	36	5180	52/37	0.02	0.02			6.83	11.00		3.57			Pass
HE20	MCS0	2	36	5180	106/53	0.03	0.03			6.63	11.00		3.57			Pass
HE20	MCS0	2	44	5220	Full	0.00	0.00			8.49	11.00		3.57			Pass
HE20	MCS0	2	44	5220	26/4	0.02	0.02			7.71	11.00		3.57			Pass
HE20	MCS0	2	44	5220	52/38	0.02	0.02			7.86	11.00		3.57			Pass
HE20	MCS0	2	44	5220	106/53	0.03	0.03			7.60	11.00		3.57			Pass
HE20	MCS0	2	48	5240	Full	0.00	0.00			8.49	11.00		3.57			Pass
HE20	MCS0	2	48	5240	26/8	0.02	0.02			7.85	11.00		3.57			Pass
HE20	MCS0	2	48	5240	52/40	0.02	0.02	-		8.02	11.00		3.57		-	Pass
HE20	MCS0	2	48	5240	106/54	0.03	0.03			7.79	11.00		3.57			Pass
HE40	MCS0	2	38	5190	Full	0.03	0.02			3.19	11.00		3.57			Pass
HE40	MCS0	2	38	5190	242/61	0.03	0.03			2.71	11.00		3.57			Pass
HE40	MCS0	2	46	5230	Full	0.03	0.02			5.69	11.00		3.57			Pass
HE40	MCS0	2	46	5230	242/62	0.03	0.03			5.82	11.00		3.57			Pass
HE80	MCS0	2	42	5210	Full	0.01	0.01			0.47	11.00		3.57			Pass
HE80	MCS0	2	42	5210	484/65	0.06	0.06			0.18	11.00		3.57			Pass
HE160	MCS0	2	50	5250	Full	0.01	0.02			-2.09	11.00		3.57			Pass
HE160	MCS0	2	50	5250	996/67	0.10	0.10			-2.21	11.00		3.57			Pass
HE160	MCS0	2	50	5250	996/S67	0.10	0.10			-2.14	11.00		3.57			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	52	5260	Full	18.35	18.06	21.22	23.98		0.92		30	Pass
HE20	MCS0	2	52	5260	26/0	8.21	7.82	11.03	23.98		0.92		30	Pass
HE20	MCS0	2	52	5260	52/37	11.12	10.75	13.95	23.98		0.92		30	Pass
HE20	MCS0	2	52	5260	106/53	14.64	14.08	17.38	23.98		0.92		30	Pass
HE20	MCS0	2	60	5300	Full	19.15	19.08	22.13	23.98		0.92		30	Pass
HE20	MCS0	2	60	5300	26/4	9.41	8.99	12.22	23.98		0.92		30	Pass
HE20	MCS0	2	60	5300	52/38	11.31	10.97	14.15	23.98		0.92		30	Pass
HE20	MCS0	2	60	5300	106/53	14.35	13.83	17.11	23.98		0.92		30	Pass
HE20	MCS0	2	64	5320	Full	18.31	17.65	21.00	23.98		0.92		30	Pass
HE20	MCS0	2	64	5320	26/8	8.48	7.89	11.21	23.98		0.92		30	Pass
HE20	MCS0	2	64	5320	52/40	11.33	11.07	14.21	23.98		0.92		30	Pass
HE20	MCS0	2	64	5320	106/54	14.43	14.31	17.38	23.98		0.92		30	Pass
HE40	MCS0	2	54	5270	Full	18.68	18.37	21.54	23.98		0.92		30	Pass
HE40	MCS0	2	54	5270	242/61	14.82	14.17	17.52	23.98		0.92		30	Pass
HE40	MCS0	2	62	5310	Full	17.41	17.18	20.31	23.98		0.92		30	Pass
HE40	MCS0	2	62	5310	242/62	14.17	13.97	17.08	23.98		0.92		30	Pass
HE80	MCS0	2	58	5290	Full	16.38	16.25	19.33	23.98		0.92		30	Pass
HE80	MCS0	2	58	5290	484/66	12.86	12.16	15.53	23.98		0.92		30	Pass
HE160	MCS0	2	50	5250	996/67	13.14	12.76	15.96	23.98		0.92		30	Pass
HE160	MCS0	2	50	5250	996/S67	12.68	11.71	15.23	23.98		0.92		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	52	5260	Full	0.00	0.00			8.30	11.00		3.65			Pass
HE20	MCS0	2	52	5260	26/0	0.02	0.02			7.88	11.00		3.65			Pass
HE20	MCS0	2	52	5260	52/37	0.02	0.02			7.67	11.00		3.65			Pass
HE20	MCS0	2	52	5260	106/53	0.03	0.03			8.07	11.00		3.65			Pass
HE20	MCS0	2	60	5300	Full	0.00	0.00			9.07	11.00		3.65			Pass
HE20	MCS0	2	60	5300	26/4	0.02	0.02			8.06	11.00		3.65			Pass
HE20	MCS0	2	60	5300	52/38	0.02	0.02			8.26	11.00		3.65			Pass
HE20	MCS0	2	60	5300	106/53	0.03	0.03			8.08	11.00		3.65			Pass
HE20	MCS0	2	64	5320	Full	0.00	0.00			9.24	11.00		3.65			Pass
HE20	MCS0	2	64	5320	26/8	0.02	0.02		-	8.26	11.00		3.65		-	Pass
HE20	MCS0	2	64	5320	52/40	0.02	0.02			8.27	11.00		3.65			Pass
HE20	MCS0	2	64	5320	106/54	0.03	0.03			8.35	11.00		3.65			Pass
HE40	MCS0	2	54	5270	Full	0.03	0.02			5.53	11.00		3.65			Pass
HE40	MCS0	2	54	5270	242/61	0.03	0.03			5.46	11.00		3.65			Pass
HE40	MCS0	2	62	5310	Full	0.03	0.02			5.23	11.00		3.65			Pass
HE40	MCS0	2	62	5310	242/62	0.03	0.03			5.04	11.00		3.65			Pass
HE80	MCS0	2	58	5290	Full	0.01	0.01			1.15	11.00		3.65			Pass
HE80	MCS0	2	58	5290	484/66	0.06	0.06			0.77	11.00		3.65			Pass
HE160	MCS0	2	50	5250	996/67	0.10	0.10			-2.21	11.00		3.65			Pass
HE160	MCS0	2	50	5250	996/S67	0.10	0.10			-2.14	11.00		3.65			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	100	5500	Full	18.51	18.54	21.54	23.98		1.06		30	Pass
HE20	MCS0	2	100	5500	26/0	8.22	8.01	11.13	23.98		1.06		30	Pass
HE20	MCS0	2	100	5500	52/37	11.35	10.77	14.08	23.98		1.06		30	Pass
HE20	MCS0	2	100	5500	106/53	14.71	14.28	17.51	23.98		1.06		30	Pass
HE20	MCS0	2	116	5580	Full	19.37	18.77	22.09	23.98		1.06		30	Pass
HE20	MCS0	2	116	5580	26/4	9.59	8.49	12.09	23.98		1.06		30	Pass
HE20	MCS0	2	116	5580	52/38	11.64	10.67	14.19	23.98		1.06		30	Pass
HE20	MCS0	2	116	5580	106/53	14.84	14.04	17.47	23.98		1.06		30	Pass
HE20	MCS0	2	140	5700	Full	18.67	18.74	21.72	23.98		1.06		30	Pass
HE20	MCS0	2	140	5700	26/8	8.01	7.73	10.88	23.98		1.06		30	Pass
HE20	MCS0	2	140	5700	52/40	10.77	10.16	13.49	23.98		1.06		30	Pass
HE20	MCS0	2	140	5700	106/54	14.31	13.59	16.98	23.98		1.06		30	Pass
HE40	MCS0	2	102	5510	Full	17.64	17.52	20.59	23.98		1.06		30	Pass
HE40	MCS0	2	102	5510	242/61	14.66	14.04	17.37	23.98		1.06		30	Pass
HE40	MCS0	2	110	5550	Full	18.82	18.91	21.88	23.98		1.06		30	Pass
HE40	MCS0	2	110	5550	242/61	14.94	14.57	17.77	23.98		1.06		30	Pass
HE40	MCS0	2	134	5670	Full	18.76	18.52	21.65	23.98		1.06		30	Pass
HE40	MCS0	2	134	5670	242/62	14.66	13.92	17.32	23.98		1.06		30	Pass
HE80	MCS0	2	106	5530	Full	16.67	16.89	19.79	23.98		1.06		30	Pass
HE80	MCS0	2	106	5530	484/65	13.55	13.24	16.41	23.98		1.06		30	Pass
HE80	MCS0	2	122	5610	Full	18.54	18.22	21.39	23.98		1.06		30	Pass
HE80	MCS0	2	122	5610	484/66	15.25	14.61	17.95	23.98		1.06		30	Pass
HE160	MCS0	2	114	5570	Full	15.95	15.31	18.65	23.98		1.06		30	Pass
HE160	MCS0	2	114	5570	996/67	12.98	12.21	15.62	23.98		1.06		30	Pass
HE160	MCS0	2	114	5570	996/S67	12.42	11.45	14.97	23.98		1.06		30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	144	5720	Full	18.67	18.76	21.73	23.98		1.06		30	Pass
HE20	MCS0	2	144	5720	26/8	7.93	7.56	10.76	23.98		1.06		30	Pass
HE20	MCS0	2	144	5720	52/40	11.14	10.68	13.93	23.98		1.06		30	Pass
HE20	MCS0	2	144	5720	106/54	13.95	13.65	16.81	23.98		1.06		30	Pass
HE40	MCS0	2	142	5710	Full	18.58	18.63	21.62	23.98		1.06		30	Pass
HE40	MCS0	2	142	5710	242/62	14.89	14.37	17.65	23.98		1.06		30	Pass
HE80	MCS0	2	138	5690	Full	18.06	18.23	21.16	23.98		1.06		30	Pass
HE80	MCS0	2	138	5690	484/66	15.07	14.54	17.82	23.98		1.06		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	100	5500	Full	0.00	0.00			8.92	11.00		3.60			Pass
HE20	MCS0	2	100	5500	26/0	0.02	0.02			8.03	11.00		3.60			Pass
HE20	MCS0	2	100	5500	52/37	0.02	0.02			8.07	11.00		3.60			Pass
HE20	MCS0	2	100	5500	106/53	0.03	0.03			8.66	11.00		3.60			Pass
HE20	MCS0	2	116	5580	Full	0.00	0.00			9.09	11.00		3.60			Pass
HE20	MCS0	2	116	5580	26/4	0.02	0.02			8.09	11.00		3.60			Pass
HE20	MCS0	2	116	5580	52/38	0.02	0.02			8.40	11.00		3.60			Pass
HE20	MCS0	2	116	5580	106/53	0.03	0.03			8.50	11.00		3.60			Pass
HE20	MCS0	2	140	5700	Full	0.00	0.00			8.74	11.00		3.60			Pass
HE20	MCS0	2	140	5700	26/8	0.02	0.02			8.06	11.00		3.60			Pass
HE20	MCS0	2	140	5700	52/40	0.02	0.02			7.84	11.00		3.60			Pass
HE20	MCS0	2	140	5700	106/54	0.03	0.03			8.21	11.00		3.60			Pass
HE40	MCS0	2	102	5510	Full	0.03	0.02	-		5.61	11.00		3.60		-	Pass
HE40	MCS0	2	102	5510	242/61	0.03	0.03			5.43	11.00		3.60			Pass
HE40	MCS0	2	110	5550	Full	0.03	0.02			5.99	11.00		3.60			Pass
HE40	MCS0	2	110	5550	242/61	0.03	0.03			5.69	11.00		3.60			Pass
HE40	MCS0	2	134	5670	Full	0.03	0.02			5.53	11.00		3.60			Pass
HE40	MCS0	2	134	5670	242/62	0.03	0.03			5.19	11.00		3.60			Pass
HE80	MCS0	2	106	5530	Full	0.01	0.01			1.59	11.00		3.60			Pass
HE80	MCS0	2	106	5530	484/65	0.06	0.06			1.28	11.00		3.60			Pass
HE80	MCS0	2	122	5610	Full	0.01	0.01			3.24	11.00		3.60			Pass
HE80	MCS0	2	122	5610	484/66	0.06	0.06			3.16	11.00		3.60			Pass
HE160	MCS0	2	114	5570	Full	0.01	0.02			-1.97	11.00		3.60			Pass
HE160	MCS0	2	114	5570	996/67	0.10	0.10			-2.77	11.00		3.60			Pass
HE160	MCS0	2	114	5570	996/S67	0.10	0.10			-2.40	11.00		3.60			Pass

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	144	5720	Full	0.00	0.00			8.76	11.00		3.60			Pass
HE20	MCS0	2	144	5720	26/8	0.02	0.02			7.88	11.00		3.60			Pass
HE20	MCS0	2	144	5720	52/40	0.02	0.02			8.15	11.00		3.60			Pass
HE20	MCS0	2	144	5720	106/54	0.03	0.03			8.06	11.00		3.60			Pass
HE40	MCS0	2	142	5710	Full	0.03	0.02	-		5.72	11.00		3.60		-	Pass
HE40	MCS0	2	142	5710	242/62	0.03	0.03			5.68	11.00		3.60			Pass
HE80	MCS0	2	138	5690	Full	0.01	0.01			3.21	11.00		3.60			Pass
HE80	MCS0	2	138	5690	484/66	0.06	0.06			3.04	11.00		3.60			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	36	5180	Full	17.77	17.12	20.47	24.00		0.87		-	Pass
EHT20	MCS0	2	36	5180	26/0	8.06	7.32	10.72	24.00		0.87			Pass
EHT20	MCS0	2	36	5180	52/37	10.59	9.87	13.26	24.00		0.87			Pass
EHT20	MCS0	2	36	5180	106/53	14.05	13.16	16.64	24.00		0.87			Pass
EHT20	MCS0	2	36	5180	52T+26T/70	12.56	11.56	15.10	24.00		0.87			Pass
EHT20	MCS0	2	36	5180	106T+26T/82	14.46	13.66	17.09	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	Full	19.31	18.65	22.00	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	26/4	9.55	8.82	12.21	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	52/38	11.66	10.91	14.31	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	106/53	14.39	13.44	16.95	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	52T+26T/71	13.21	12.37	15.82	24.00		0.87			Pass
EHT20	MCS0	2	44	5220	106T+26T/83	15.31	14.38	17.88	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	Full	19.25	19.02	22.15	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	26/8	8.76	8.21	11.50	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	52/40	11.61	11.15	14.40	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	106/54	14.51	14.01	17.28	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	52T+26T/72	13.98	13.55	16.78	24.00		0.87			Pass
EHT20	MCS0	2	48	5240	106T+26T/83	15.46	15.08	18.28	24.00		0.87			Pass
EHT40	MCS0	2	38	5190	Full	15.95	15.56	18.77	24.00		0.87			Pass
EHT40	MCS0	2	38	5190	242/61	12.68	11.72	15.24	24.00		0.87			Pass
EHT40	MCS0	2	46	5230	Full	18.23	17.61	20.94	24.00		0.87			Pass
EHT40	MCS0	2	46	5230	242/62	15.17	14.28	17.76	24.00		0.87			Pass
EHT80	MCS0	2	42	5210	Full	16.25	15.63	18.96	24.00		0.87			Pass
EHT80	MCS0	2	42	5210	484/65	13.02	12.04	15.57	24.00		0.87			Pass
EHT80	MCS0	2	42	5210	Puncture 20/4	14.85	13.77	17.35	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	Full	16.44	16.46	19.46	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	996/67	13.31	13.07	16.20	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	996/S67	12.85	12.36	15.62	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	Puncture20/1	15.82	15.52	18.68	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	Puncture20/8	15.75	15.33	18.56	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	Puncture40/1	15.01	14.43	17.74	24.00		0.87			Pass
EHT160	MCS0	2	50	5250	Puncture40/4	15.15	14.87	18.02	24.00		0.87			Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	36	5180	Full	19.23	19.19	23.95	23.66	-		22.83		-	-
EHT20	MCS0	2	44	5220	Full	19.23	19.17	24.35	23.93	-		22.83			
EHT20	MCS0	2	48	5240	Full	19.36	19.23	24.01	23.70	-		22.84			
EHT40	MCS0	2	38	5190	Full	38.23	38.24	45.26	44.58	-		23.01			
EHT40	MCS0	2	46	5230	Full	38.51	38.28	49.73	44.78	-		23.01			
EHT80	MCS0	2	42	5210	Full	77.80	77.78	89.73	91.17	-		23.01			
EHT160	MCS0	2	50	5250	Full	156.94	157.30	175.68	172.99	-		23.01			

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	36	5180	Full	0.02	0.02			7.69	11.00		3.57			Pass
EHT20	MCS0	2	36	5180	26/0	0.02	0.02			7.53	11.00		3.57			Pass
EHT20	MCS0	2	36	5180	52/37	0.02	0.02			7.27	11.00		3.57			Pass
EHT20	MCS0	2	36	5180	106/53	0.02	0.02			7.60	11.00		3.57			Pass
EHT20	MCS0	2	36	5180	52T+26T/70	0.02	0.02			7.20	11.00		3.57			Pass
EHT20	MCS0	2	36	5180	106T+26T/82	0.02	0.02			7.16	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	Full	0.02	0.02			8.55	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	26/4	0.02	0.02			8.12	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	52/38	0.02	0.02			8.29	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	106/53	0.02	0.02			8.14	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	52T+26T/71	0.02	0.02			8.12	11.00		3.57			Pass
EHT20	MCS0	2	44	5220	106T+26T/83	0.02	0.02			8.12	11.00		3.57			Pass
EHT20	MCS0	2	48	5240	Full	0.02	0.02			8.91	11.00		3.57			Pass
EHT20	MCS0	2	48	5240	26/8	0.02	0.02			8.55	11.00		3.57			Pass
EHT20	MCS0	2	48	5240	52/40	0.02	0.02			8.50	11.00		3.57			Pass
EHT20	MCS0	2	48	5240	106/54	0.02	0.02		-	8.33	11.00		3.57		-	Pass
EHT20	MCS0	2	48	5240	52T+26T/72	0.02	0.02			8.87	11.00		3.57			Pass
EHT20	MCS0	2	48	5240	106T+26T/83	0.02	0.02			8.40	11.00		3.57			Pass
EHT40	MCS0	2	38	5190	Full	0.02	0.02			3.22	11.00		3.57			Pass
EHT40	MCS0	2	38	5190	242/61	0.03	0.03			3.18	11.00		3.57			Pass
EHT40	MCS0	2	46	5230	Full	0.02	0.02			5.75	11.00		3.57			Pass
EHT40	MCS0	2	46	5230	242/62	0.03	0.03			5.62	11.00		3.57			Pass
EHT80	MCS0	2	42	5210	Full	0.02	0.02			0.55	11.00		3.57			Pass
EHT80	MCS0	2	42	5210	484/65	0.06	0.06			0.25	11.00		3.57			Pass
EHT80	MCS0	2	42	5210	Puncture 20/4	0.00	0.00			0.28	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	Full	0.02	0.01			-1.63	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	996/67	0.09	0.09			-2.02	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	996/S67	0.09	0.09			-1.99	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	Puncture20/1	0.09	0.09			-1.81	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	Puncture20/8	0.09	0.09			-2.06	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	Puncture40/1	0.02	0.02			-2.02	11.00		3.57			Pass
EHT160	MCS0	2	50	5250	Puncture40/4	0.00	0.00			-2.04	11.00		3.57			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	52	5260	Full	18.48	18.12	21.31	23.98		0.92		30	Pass
EHT20	MCS0	2	52	5260	26/0	8.49	8.04	11.28	23.98		0.92		30	Pass
EHT20	MCS0	2	52	5260	52/37	11.39	10.94	14.18	23.98		0.92		30	Pass
EHT20	MCS0	2	52	5260	106/53	14.83	14.31	17.59	23.98		0.92		30	Pass
EHT20	MCS0	2	52	5260	52T+26T/70	13.66	13.13	16.41	23.98		0.92		30	Pass
EHT20	MCS0	2	52	5260	106T+26T/82	15.31	14.81	18.08	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	Full	19.24	19.18	22.22	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	26/4	9.81	9.47	12.65	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	52/38	12.08	11.65	14.88	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	106/53	14.85	14.34	17.61	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	52T+26T/71	13.58	13.25	16.43	23.98		0.92		30	Pass
EHT20	MCS0	2	60	5300	106T+26T/83	15.85	15.64	18.76	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	Full	18.48	17.88	21.20	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	26/8	8.96	8.58	11.78	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	52/40	11.81	11.59	14.71	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	106/54	14.86	14.66	17.77	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	52T+26T/72	13.11	12.82	15.98	23.98		0.92		30	Pass
EHT20	MCS0	2	64	5320	106T+26T/83	15.69	15.48	18.60	23.98		0.92		30	Pass
EHT40	MCS0	2	54	5270	Full	19.03	18.44	21.76	23.98		0.92		30	Pass
EHT40	MCS0	2	54	5270	242/61	14.98	14.37	17.70	23.98		0.92		30	Pass
EHT40	MCS0	2	62	5310	Full	17.53	17.29	20.42	23.98		0.92		30	Pass
EHT40	MCS0	2	62	5310	242/62	14.34	14.07	17.22	23.98		0.92		30	Pass
EHT80	MCS0	2	58	5290	Full	16.56	16.38	19.48	23.98		0.92		30	Pass
EHT80	MCS0	2	58	5290	484/66	13.03	12.25	15.67	23.98		0.92		30	Pass
EHT80	MCS0	2	58	5290	Puncture 20/1	14.88	14.34	17.63	23.98		0.92		30	Pass
EHT160	MCS0	2	50	5250	Full	16.44	16.46	19.46	23.98		0.92		30	Pass
EHT160	MCS0	2	50	5250	996/67	13.31	13.07	16.20	23.98		0.92		30	Pass
EHT160	MCS0	2	50	5250	996/S67	12.85	12.36	15.62	23.98		0.92		30	Pass
EHT160	MCS0	2	50	5250	Puncture40/1	15.01	14.43	17.74	23.98		0.92		30	Pass
EHT160	MCS0	2	50	5250	Puncture40/4	15.15	14.87	18.02	23.98		0.92		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO																	
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	
EHT20	MCS0	2	52	5260	Full	19.23	19.16	24.38	23.88	23.82		29.82		23.98		
EHT20	MCS0	2	60	5300	Full	19.27	19.19	23.95	23.88	23.83		29.83		23.98		
EHT20	MCS0	2	64	5320	Full	19.26	19.18	24.08	23.94	23.83		29.83		23.98		
EHT40	MCS0	2	54	5270	Full	38.61	38.30	59.33	49.12	23.98		30.00		23.98		-
EHT40	MCS0	2	62	5310	Full	38.52	38.37	50.51	45.07	23.98		30.00		23.98		
EHT80	MCS0	2	58	5290	Full	77.84	77.79	89.95	89.57	23.98		30.00		23.98		
EHT160	MCS0	2	50	5250	Full	156.94	157.30	175.68	172.99	23.98		30.00		23.98		

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	52	5260	Full	0.02	0.02			8.56	11.00		3.65			Pass
EHT20	MCS0	2	52	5260	26/0	0.02	0.02			8.11	11.00		3.65			Pass
EHT20	MCS0	2	52	5260	52/37	0.02	0.02			8.15	11.00		3.65			Pass
EHT20	MCS0	2	52	5260	106/53	0.02	0.02			8.46	11.00		3.65			Pass
EHT20	MCS0	2	52	5260	52T+26T/70	0.02	0.02			8.48	11.00		3.65			Pass
EHT20	MCS0	2	52	5260	106T+26T/82	0.02	0.02			8.06	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	Full	0.02	0.02			9.09	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	26/4	0.02	0.02			8.58	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	52/38	0.02	0.02			8.80	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	106/53	0.02	0.02			8.50	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	52T+26T/71	0.02	0.02			8.52	11.00		3.65			Pass
EHT20	MCS0	2	60	5300	106T+26T/83	0.02	0.02			8.83	11.00		3.65			Pass
EHT20	MCS0	2	64	5320	Full	0.02	0.02			8.92	11.00		3.65			Pass
EHT20	MCS0	2	64	5320	26/8	0.02	0.02			8.72	11.00		3.65			Pass
EHT20	MCS0	2	64	5320	52/40	0.02	0.02			8.74	11.00		3.65			Pass
EHT20	MCS0	2	64	5320	106/54	0.02	0.02			8.69	11.00		3.65			Pass
EHT20	MCS0	2	64	5320	52T+26T/72	0.02	0.02	-		8.07	11.00		3.65		-	Pass
EHT20	MCS0	2	64	5320	106T+26T/83	0.02	0.02			8.58	11.00		3.65			Pass
EHT40	MCS0	2	54	5270	Full	0.02	0.02			5.58	11.00		3.65			Pass
EHT40	MCS0	2	54	5270	242/61	0.03	0.03			5.53	11.00		3.65			Pass
EHT40	MCS0	2	62	5310	Full	0.02	0.02			5.25	11.00		3.65			Pass
EHT40	MCS0	2	62	5310	242/62	0.03	0.03			5.03	11.00		3.65			Pass
EHT80	MCS0	2	58	5290	Full	0.02	0.02			1.17	11.00		3.65			Pass
EHT80	MCS0	2	58	5290	484/66	0.06	0.06			0.87	11.00		3.65			Pass
EHT80	MCS0	2	58	5290	Puncture 20/1	0.00	0.00			0.62	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	Full	0.02	0.01			-1.63	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	996/67	0.09	0.09			-2.02	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	996/S67	0.09	0.09			-1.99	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	Puncture20/1	0.09	0.09			-2.02	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	Puncture20/8	0.09	0.09			-2.04	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	Puncture40/1	0.02	0.02			-2.02	11.00		3.65			Pass
EHT160	MCS0	2	50	5250	Puncture40/4	0.00	0.00			-2.04	11.00		3.65			Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	100	5500	Full	18.69	18.63	21.67	23.98		1.06		30	Pass
EHT20	MCS0	2	100	5500	26/0	8.87	8.64	11.77	23.98		1.06		30	Pass
EHT20	MCS0	2	100	5500	52/37	11.92	11.47	14.71	23.98		1.06		30	Pass
EHT20	MCS0	2	100	5500	106/53	15.24	14.74	18.01	23.98		1.06		30	Pass
EHT20	MCS0	2	100	5500	52T+26T/70	14.21	14.04	17.14	23.98		1.06		30	Pass
EHT20	MCS0	2	100	5500	106T+26T/82	16.17	15.71	18.96	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	Full	19.41	18.87	22.16	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	26/4	10.12	9.11	12.65	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	52/38	12.14	11.44	14.81	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	106/53	15.08	14.44	17.78	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	52T+26T/71	14.25	13.41	16.86	23.98		1.06		30	Pass
EHT20	MCS0	2	116	5580	106T+26T/83	15.92	15.32	18.64	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	Full	19.24	18.84	22.05	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	26/8	8.71	8.09	11.42	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	52/40	11.42	10.64	14.06	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	106/54	14.84	14.24	17.56	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	52T+26T/72	13.43	12.69	16.09	23.98		1.06		30	Pass
EHT20	MCS0	2	140	5700	106T+26T/83	15.75	15.06	18.43	23.98		1.06		30	Pass
EHT40	MCS0	2	102	5510	Full	17.87	17.61	20.75	23.98		1.06		30	Pass
EHT40	MCS0	2	102	5510	242/61	14.85	14.39	17.64	23.98		1.06		30	Pass
EHT40	MCS0	2	110	5550	Full	18.85	18.97	21.92	23.98		1.06		30	Pass
EHT40	MCS0	2	110	5550	242/61	15.17	14.74	17.97	23.98		1.06		30	Pass
EHT40	MCS0	2	134	5670	Full	18.79	18.59	21.70	23.98		1.06		30	Pass
EHT40	MCS0	2	134	5670	242/62	14.99	14.14	17.60	23.98		1.06		30	Pass
EHT80	MCS0	2	106	5530	Full	16.75	17.08	19.93	23.98		1.06		30	Pass
EHT80	MCS0	2	106	5530	484/65	13.73	13.43	16.59	23.98		1.06		30	Pass
EHT80	MCS0	2	106	5530	Puncture 20/4	15.39	15.14	18.28	23.98		1.06		30	Pass
EHT80	MCS0	2	122	5610	Full	18.92	18.29	21.63	23.98		1.06		30	Pass
EHT80	MCS0	2	122	5610	484/66	15.43	14.91	18.19	23.98		1.06		30	Pass
EHT80	MCS0	2	122	5610	Puncture 20/1	17.29	16.53	19.94	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	Full	16.07	15.41	18.76	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	996/67	13.41	12.63	16.05	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	996/S67	12.66	11.59	15.17	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	Puncture20/1	15.31	14.54	17.95	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	Puncture20/8	15.71	15.06	18.41	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	Puncture40/1	14.58	13.77	17.20	23.98		1.06		30	Pass
EHT160	MCS0	2	114	5570	Puncture40/4	15.15	14.51	17.85	23.98		1.06		30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	144	5720	Full	19.17	18.96	22.08	23.98		1.06		30	Pass
EHT20	MCS0	2	144	5720	26/8	8.53	7.99	11.28	23.98		1.06		30	Pass
EHT20	MCS0	2	144	5720	52/40	11.75	11.23	14.51	23.98		1.06		30	Pass
EHT20	MCS0	2	144	5720	106/54	14.66	14.15	17.42	23.98		1.06		30	Pass
EHT20	MCS0	2	144	5720	52T+26T/72	13.63	13.11	16.39	23.98		1.06		30	Pass
EHT20	MCS0	2	144	5720	106T+26T/83	15.41	15.23	18.33	23.98		1.06		30	Pass
EHT40	MCS0	2	142	5710	Full	18.62	18.72	21.68	23.98		1.06		30	Pass
EHT40	MCS0	2	142	5710	242/62	14.92	14.49	17.72	23.98		1.06		30	Pass
EHT80	MCS0	2	138	5690	Full	18.96	18.61	21.80	23.98		1.06		30	Pass
EHT80	MCS0	2	138	5690	484/66	15.25	14.72	18.00	23.98		1.06		30	Pass
EHT80	MCS0	2	138	5690	Puncture 20/1	17.16	16.56	19.88	23.98		1.06		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																	
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
EHT20	MCS0	2	100	5500	Full	19.17	19.19	24.22	24.11	23.83		29.83		23.98		----	----
EHT20	MCS0	2	116	5580	Full	19.18	19.18	23.79	24.09	23.83		29.83		23.98		----	----
EHT20	MCS0	2	140	5700	Full	19.18	19.21	23.93	23.95	23.83		29.83		23.98		----	----
EHT40	MCS0	2	102	5510	Full	38.30	38.24	45.89	44.18	23.98		30.00		23.98		----	----
EHT40	MCS0	2	118	5550	Full	38.38	38.30	46.18	44.93	23.98		30.00		23.98		----	----
EHT40	MCS0	2	134	5670	Full	38.32	38.27	45.42	45.04	23.98		30.00		23.98		----	----
EHT80	MCS0	2	106	5530	Full	77.79	77.81	90.11	90.34	23.98		30.00		23.98		----	----
EHT80	MCS0	2	122	5610	Full	77.82	77.80	91.33	89.28	23.98		30.00		23.98		----	----
EHT160	MCS0	2	114	5570	Full	156.99	157.18	170.37	173.63	23.98		30.00		23.98		----	----

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
EHT20	MCS0	2	144	5720	Full	14.59	14.60	16.74	17.16	23.83		29.83		23.98		4.435	4.49
EHT40	MCS0	2	142	5710	Full	34.18	34.10	37.82	37.30	23.98		30.00		23.98		4.035	3.801
EHT80	MCS0	2	138	5690	Full	73.95	73.88	80.63	79.70	23.98		30.00		23.98		3.08	2.952
6dB Bandwidth Limit ≧ 500kHz																Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	100	5500	Full	0.02	0.02			9.13	11.00		3.60			Pass
EHT20	MCS0	2	100	5500	26/0	0.02	0.02			8.60	11.00		3.60			Pass
EHT20	MCS0	2	100	5500	52/37	0.02	0.02			8.65	11.00		3.60			Pass
EHT20	MCS0	2	100	5500	106/53	0.02	0.02			8.85	11.00		3.60			Pass
EHT20	MCS0	2	100	5500	52T+26T/70	0.02	0.02			9.12	11.00		3.60			Pass
EHT20	MCS0	2	100	5500	106T+26T/82	0.02	0.02			8.81	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	Full	0.02	0.02			9.11	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	26/4	0.02	0.02			8.56	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	52/38	0.02	0.02			8.77	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	106/53	0.02	0.02			8.69	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	52T+26T/71	0.02	0.02			9.05	11.00		3.60			Pass
EHT20	MCS0	2	116	5580	106T+26T/83	0.02	0.02			8.72	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	Full	0.02	0.02			8.75	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	26/8	0.02	0.02			8.46	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	52/40	0.02	0.02			8.18	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	106/54	0.02	0.02			8.58	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	52T+26T/72	0.02	0.02			8.22	11.00		3.60			Pass
EHT20	MCS0	2	140	5700	106T+26T/83	0.02	0.02			8.56	11.00		3.60			Pass
EHT40	MCS0	2	102	5510	Full	0.02	0.02	-		5.72	11.00		3.60		-	Pass
EHT40	MCS0	2	102	5510	242/61	0.03	0.03			5.47	11.00		3.60			Pass
EHT40	MCS0	2	118	5550	Full	0.02	0.02			6.10	11.00		3.60			Pass
EHT40	MCS0	2	118	5550	242/61	0.03	0.03			5.83	11.00		3.60			Pass
EHT40	MCS0	2	134	5670	Full	0.02	0.02			5.76	11.00		3.60			Pass
EHT40	MCS0	2	134	5670	242/62	0.03	0.03			5.66	11.00		3.60			Pass
EHT80	MCS0	2	106	5530	Full	0.02	0.02			1.72	11.00		3.60			Pass
EHT80	MCS0	2	106	5530	484/65	0.06	0.06			1.33	11.00		3.60			Pass
EHT80	MCS0	2	106	5530	Puncture 20/4	0.00	0.00			1.25	11.00		3.60			Pass
EHT80	MCS0	2	122	5610	Full	0.02	0.02			3.47	11.00		3.60			Pass
EHT80	MCS0	2	122	5610	484/66	0.06	0.06			3.07	11.00		3.60			Pass
EHT80	MCS0	2	122	5610	Puncture 20/1	0.00	0.00			3.06	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	Full	0.02	0.01			-1.96	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	996/67	0.09	0.09			-2.14	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	996/S67	0.09	0.09			-2.51	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	Puncture20/1	0.09	0.09			-2.31	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	Puncture20/8	0.09	0.09			-2.12	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	Puncture40/1	0.02	0.02			-2.46	11.00		3.60			Pass
EHT160	MCS0	2	114	5570	Puncture40/4	0.00	0.00			-2.18	11.00		3.60			Pass

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
EHT20	MCS0	2	144	5720	Full	0.02	0.02			8.76	11.00		3.60			Pass
EHT20	MCS0	2	144	5720	26/8	0.02	0.02			8.30	11.00		3.60			Pass
EHT20	MCS0	2	144	5720	52/40	0.02	0.02			8.54	11.00		3.60			Pass
EHT20	MCS0	2	144	5720	106/54	0.02	0.02			8.40	11.00		3.60			Pass
EHT20	MCS0	2	144	5720	52T+26T/72	0.02	0.02			8.49	11.00		3.60			Pass
EHT20	MCS0	2	144	5720	106T+26T/83	0.02	0.02	-		8.46	11.00		3.60		-	Pass
EHT40	MCS0	2	142	5710	Full	0.02	0.02			5.76	11.00		3.60			Pass
EHT40	MCS0	2	142	5710	242/62	0.03	0.03			5.65	11.00		3.60			Pass
EHT80	MCS0	2	138	5690	Full	0.02	0.01			3.36	11.00		3.60			Pass
EHT80	MCS0	2	138	5690	484/66	0.06	0.06			2.96	11.00		3.60			Pass
EHT80	MCS0	2	138	5690	Puncture 20/1	0.00	0.00			2.98	11.00		3.60			Pass

Test Result of 26dB & 99% Occupied Bandwidth

MIMO <Ant. 1+2>

<802.11a>

26dB Bandwidth	99% Occupied Bandwidth
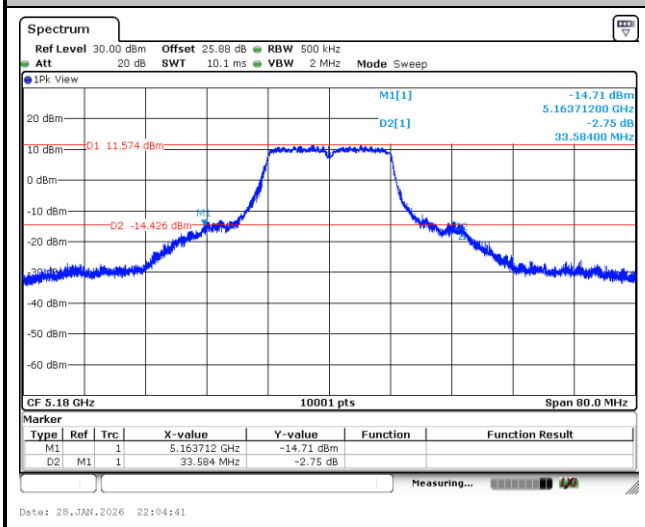	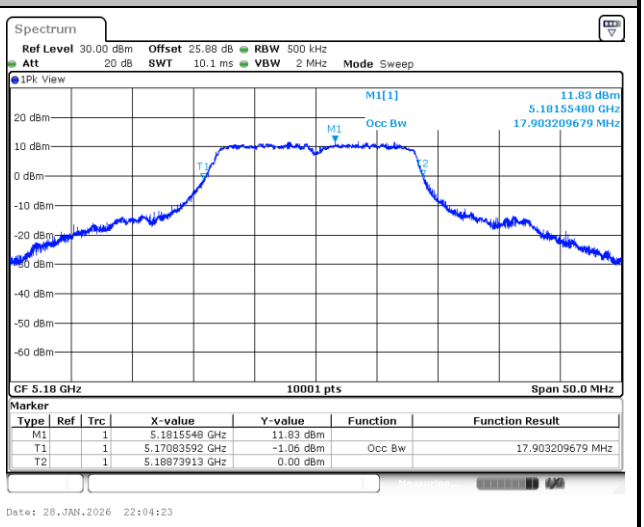

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT20>

26dB Bandwidth	99% Occupied Bandwidth
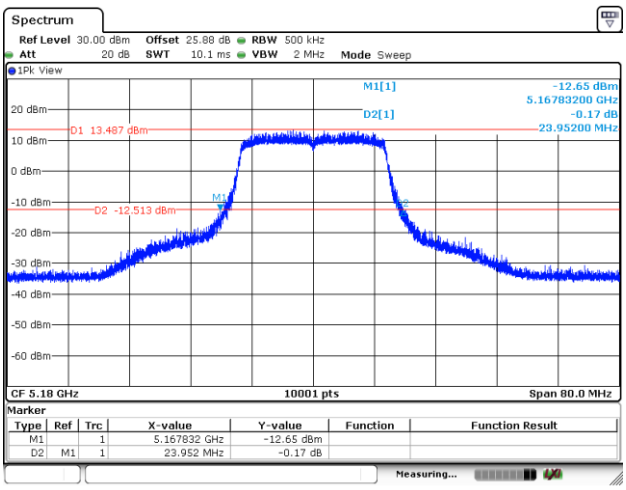	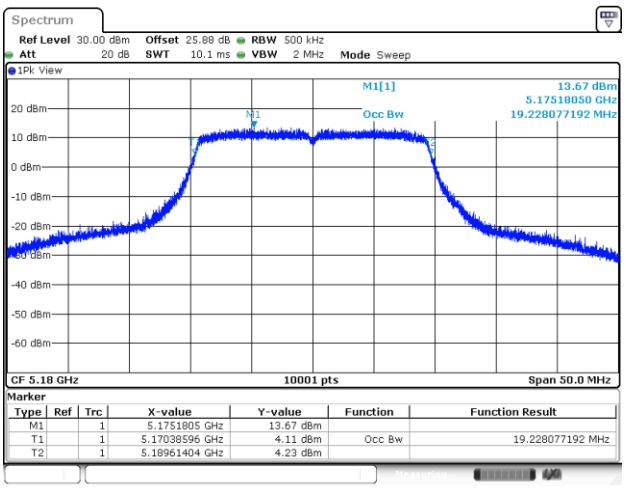

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT40>

26dB Bandwidth	99% Occupied Bandwidth
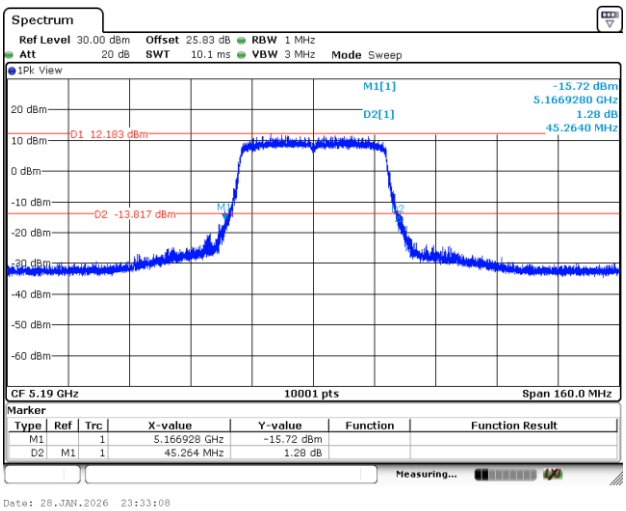	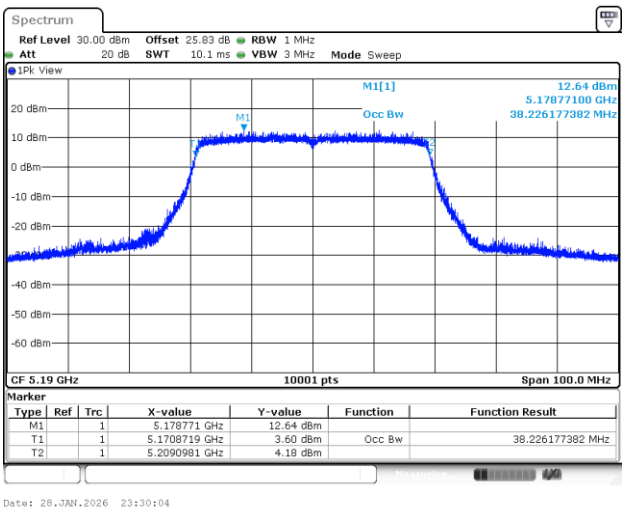

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT80>

26dB Bandwidth	99% Occupied Bandwidth
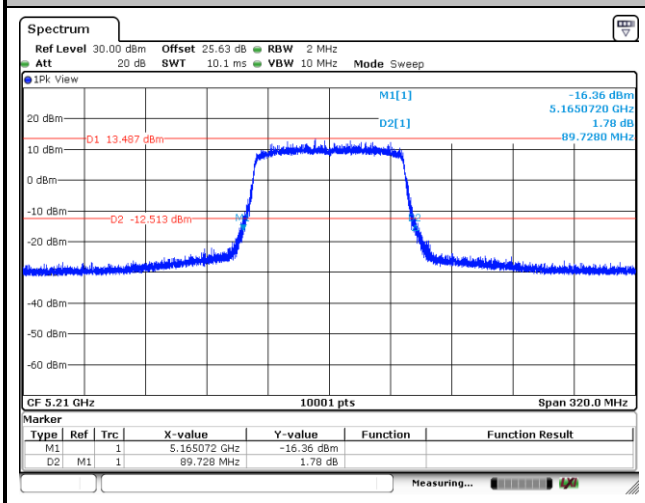	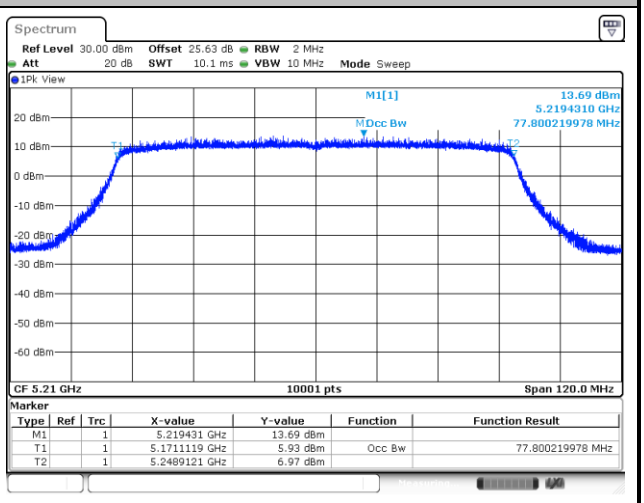

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT160>

26dB Bandwidth	99% Occupied Bandwidth
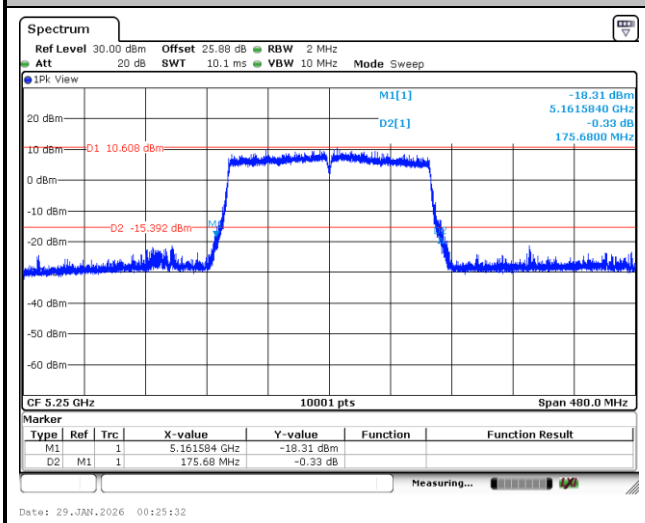	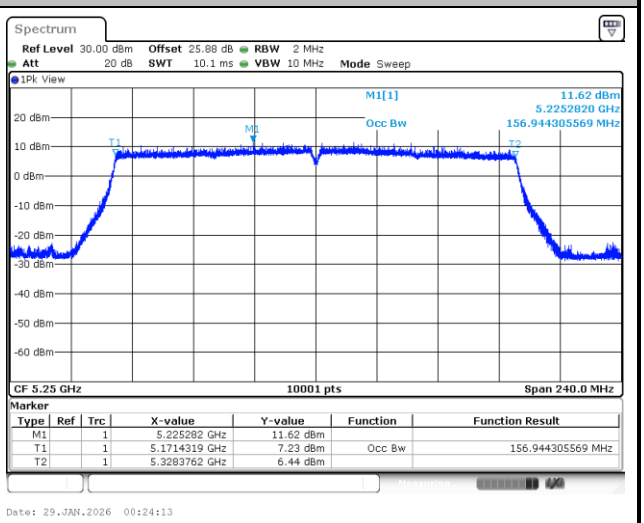

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

Test Result of Power Spectral Density

<802.11a>

Maximum Power Density Plot (dBm/MHz)
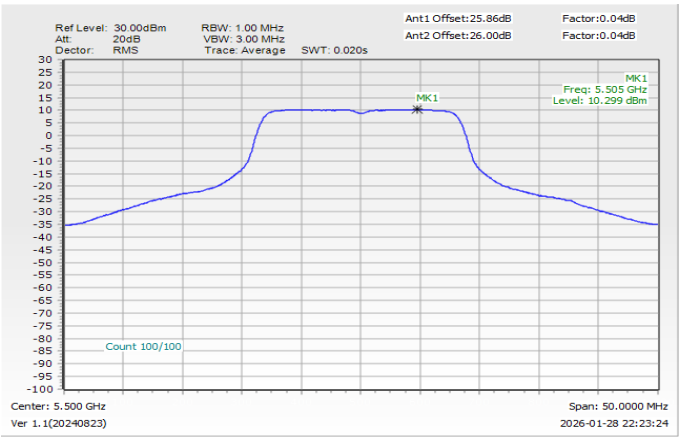

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
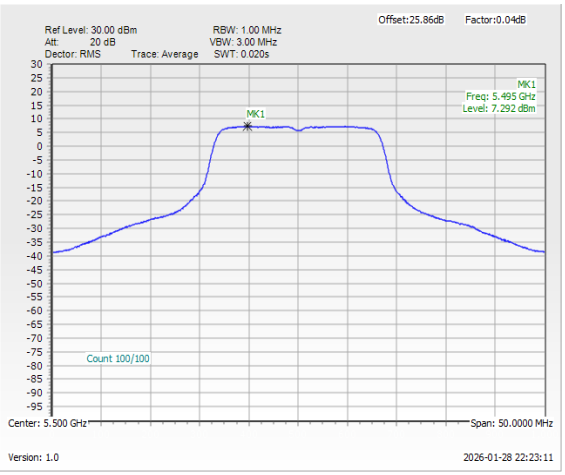	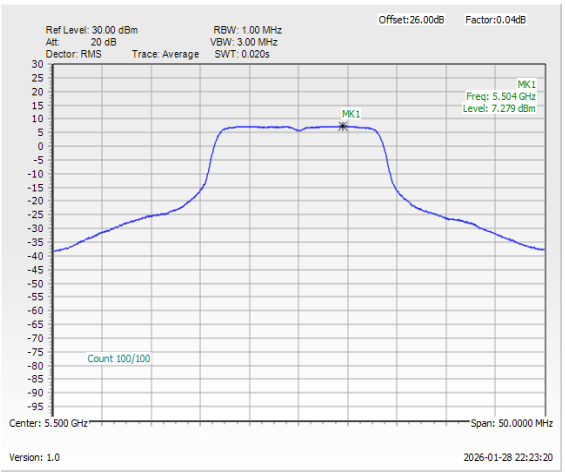

<802.11ax HE20>

Maximum Power Density Plot (dBm/MHz)
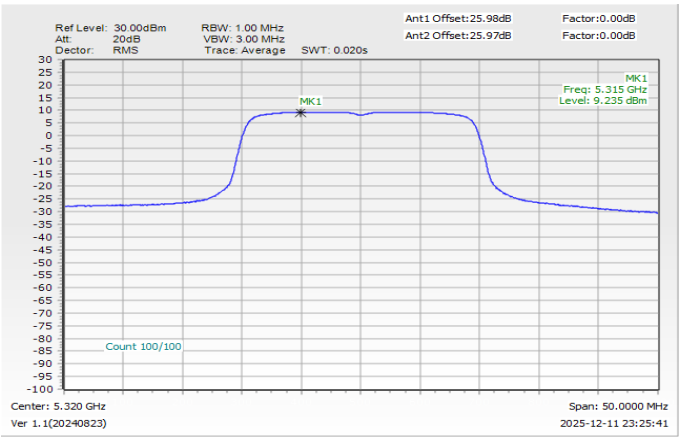

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
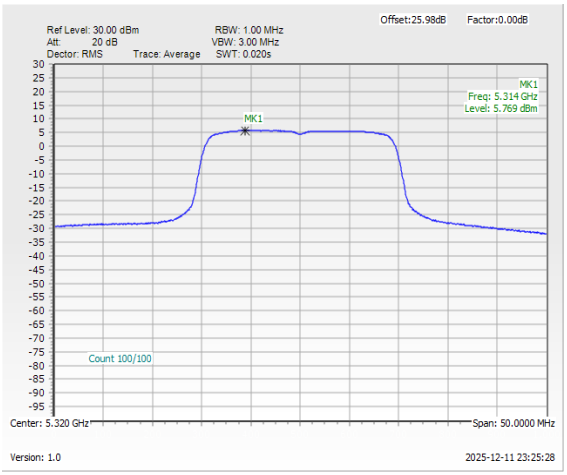	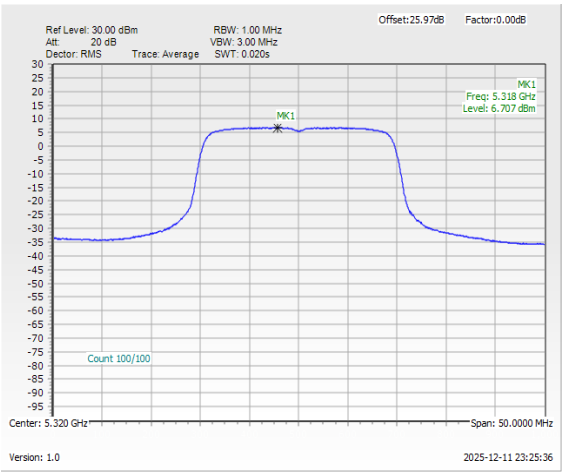

<802.11ax HE40>

Maximum Power Density Plot (dBm/MHz)
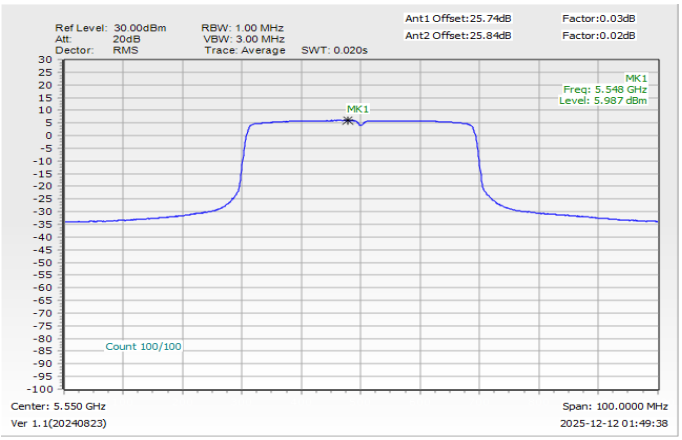

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
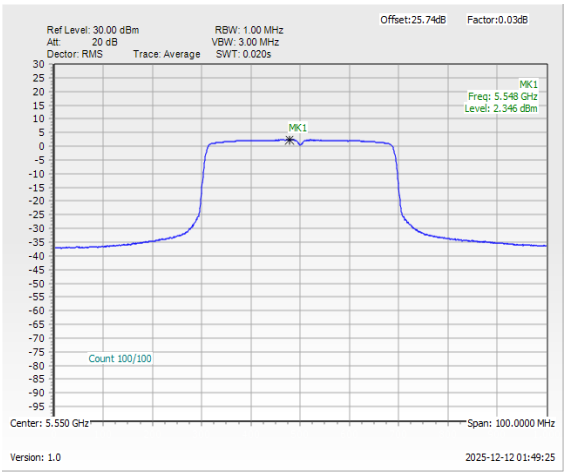	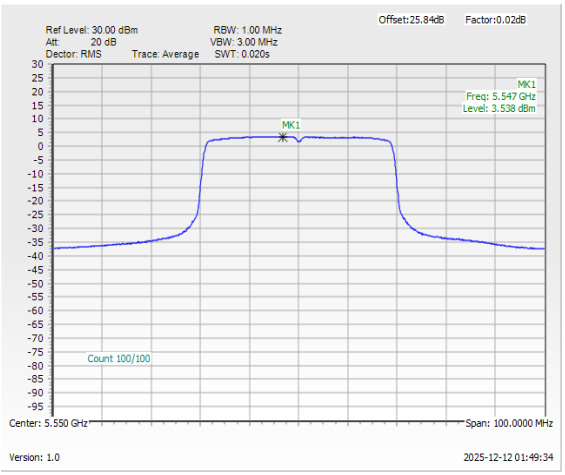

<802.11ax HE80>

Maximum Power Density Plot (dBm/MHz)

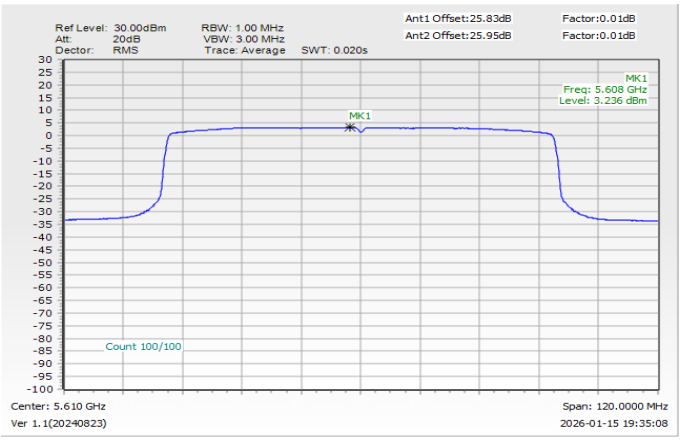

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
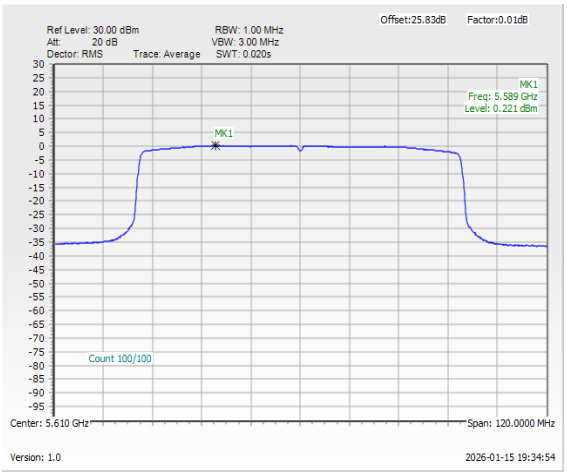	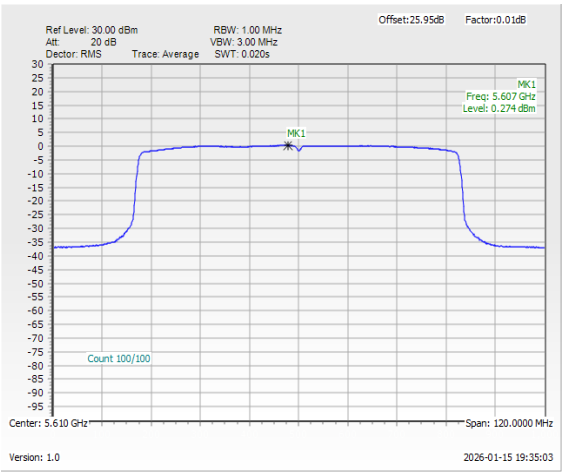

<802.11ax HE160>

Maximum Power Density Plot (dBm/MHz)

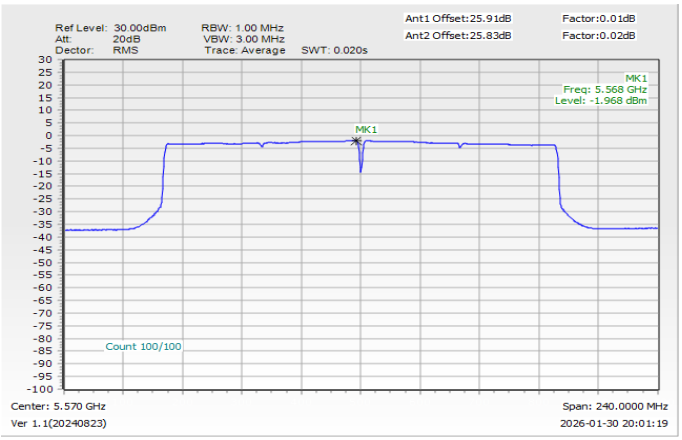

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
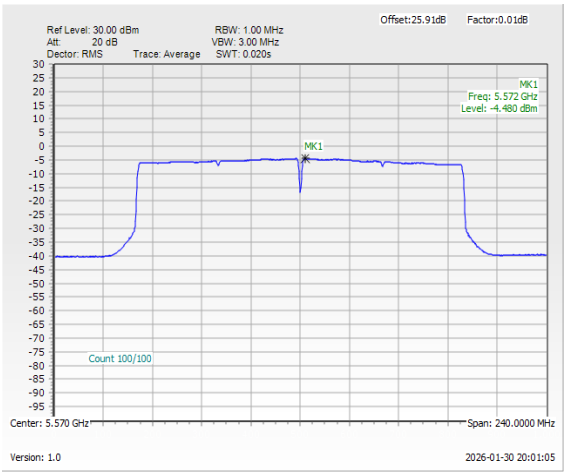	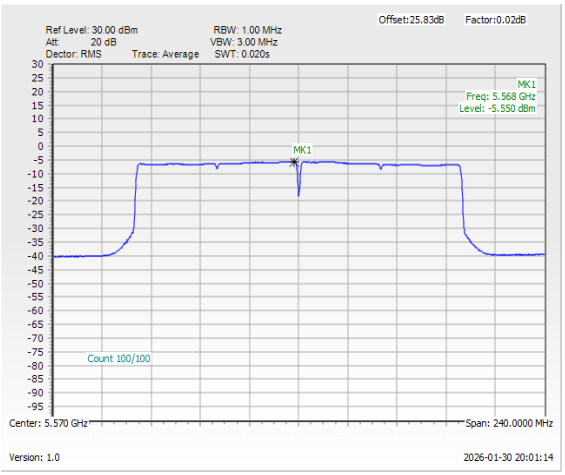

<802.11be EHT20>

Maximum Power Density Plot (dBm/MHz)
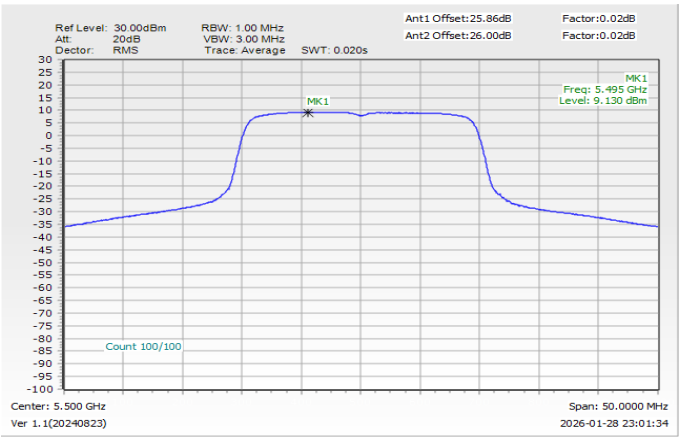

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
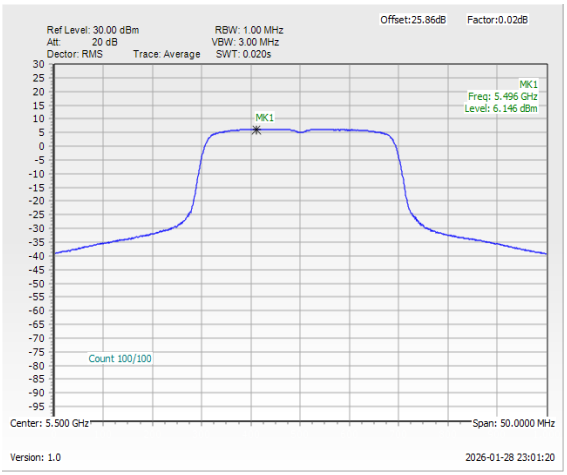	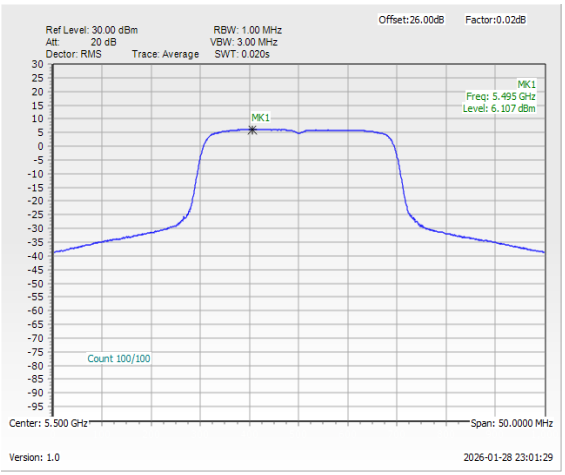

<802.11be EHT40>

Maximum Power Density Plot (dBm/MHz)
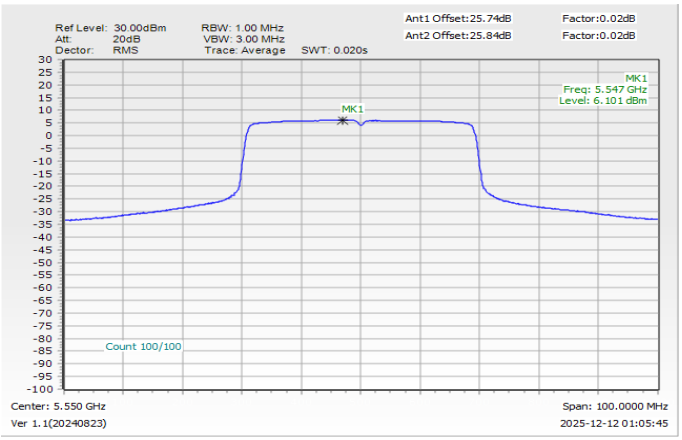

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
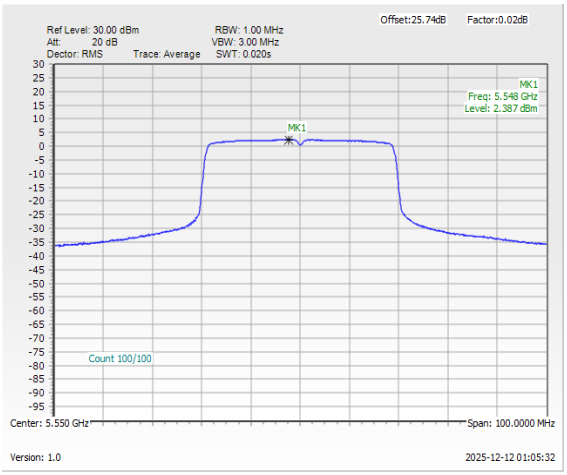	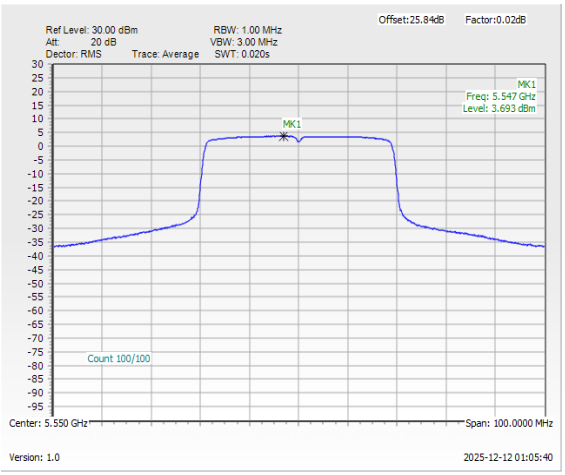

<802.11be EHT80>

Maximum Power Density Plot (dBm/MHz)
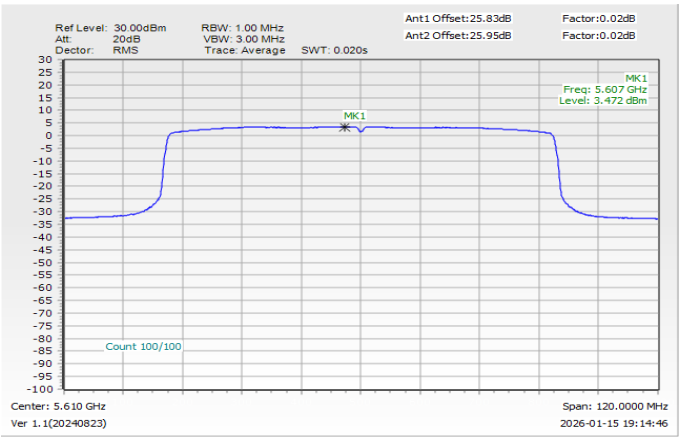

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
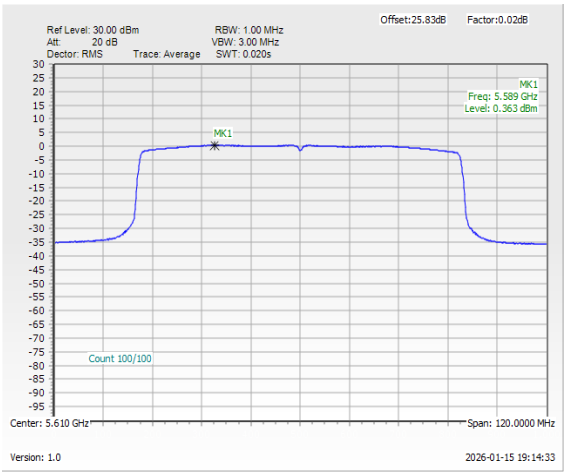	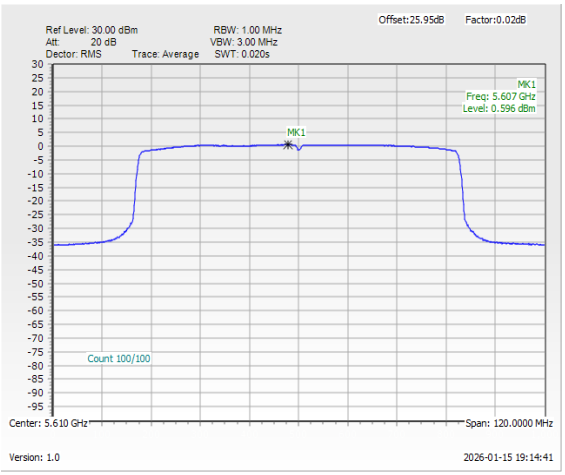

<802.11be EHT160>

Maximum Power Density Plot (dBm/MHz)
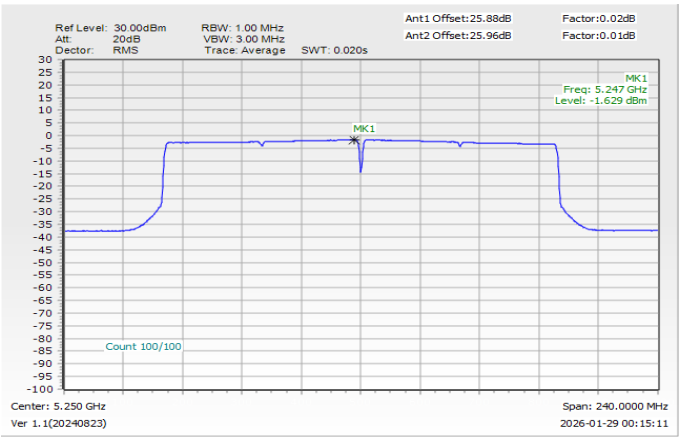

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 1)	Maximum Power Density Plot Trace 2 (Ant 2)
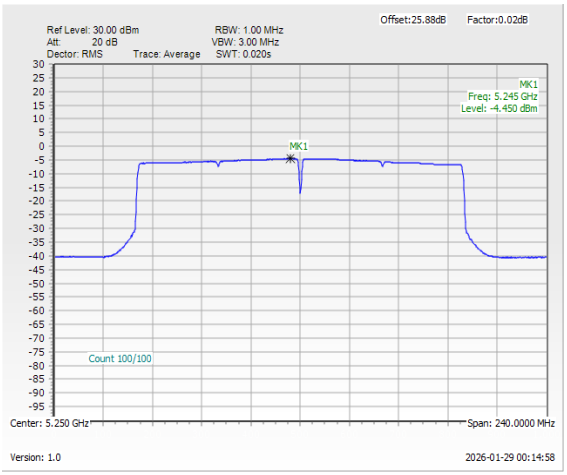	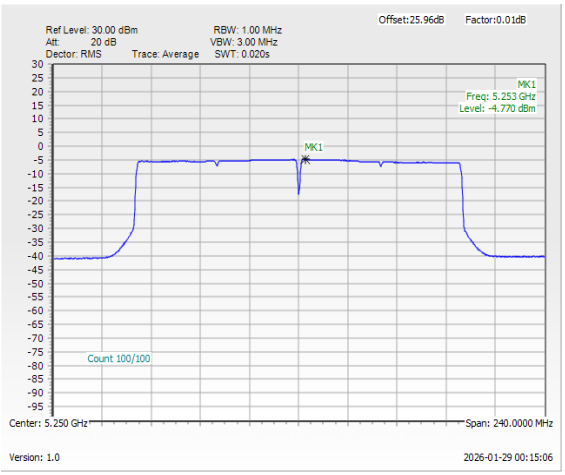

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	**Temperature :**	17.6~22.3℃
		Relative Humidity :	45.7~56.1%

EUT Information

Report NO :	5N0610-01
Test Mode :	Mode 1
Test Voltage :	Power from system
Phase :	Line

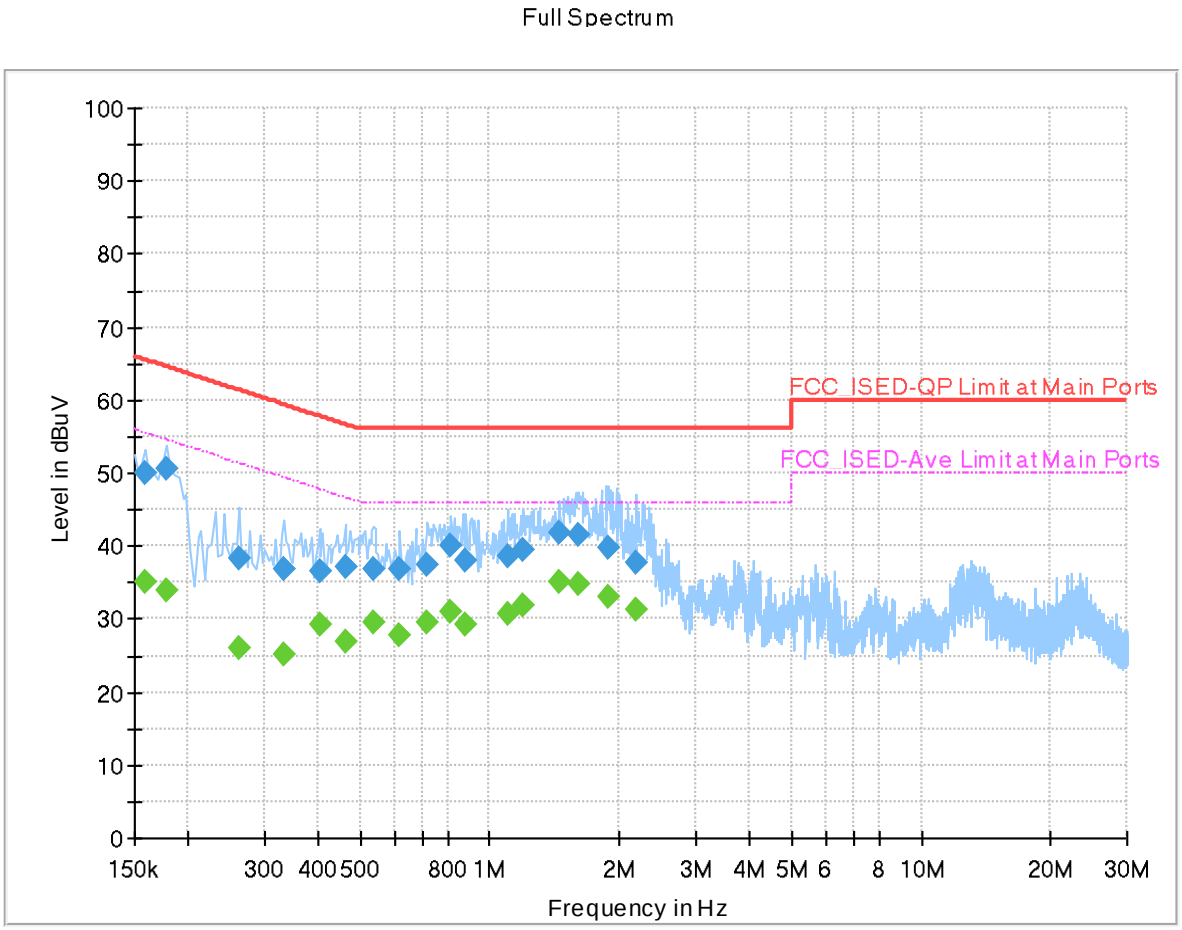

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	35.01	55.57	20.56	L1	OFF	19.9
0.158000	50.05	---	65.57	15.52	L1	OFF	19.9
0.178000	---	33.93	54.58	20.65	L1	OFF	19.9
0.178000	50.61	---	64.58	13.97	L1	OFF	19.9
0.262000	---	25.89	51.37	25.48	L1	OFF	19.9
0.262000	38.31	---	61.37	23.06	L1	OFF	19.9
0.334000	---	25.02	49.35	24.33	L1	OFF	19.9
0.334000	36.71	---	59.35	22.64	L1	OFF	19.9
0.402000	---	29.10	47.81	18.71	L1	OFF	19.9
0.402000	36.65	---	57.81	21.16	L1	OFF	19.9
0.462000	---	26.95	46.66	19.71	L1	OFF	19.9
0.462000	37.01	---	56.66	19.65	L1	OFF	19.9
0.538000	---	29.46	46.00	16.54	L1	OFF	19.9
0.538000	36.89	---	56.00	19.11	L1	OFF	19.9
0.618000	---	27.91	46.00	18.09	L1	OFF	19.9
0.618000	36.70	---	56.00	19.30	L1	OFF	19.9
0.718000	---	29.56	46.00	16.44	L1	OFF	19.9
0.718000	37.54	---	56.00	18.46	L1	OFF	19.9
0.814000	---	30.91	46.00	15.09	L1	OFF	19.9

0.814000	40.05	---	56.00	15.95	L1	OFF	19.9
0.882000	---	29.34	46.00	16.66	L1	OFF	19.9
0.882000	37.88	---	56.00	18.12	L1	OFF	19.9
1.102000	---	30.79	46.00	15.21	L1	OFF	19.9
1.102000	38.71	---	56.00	17.29	L1	OFF	19.9
1.198000	---	31.86	46.00	14.14	L1	OFF	19.9
1.198000	39.34	---	56.00	16.66	L1	OFF	19.9
1.446000	---	35.02	46.00	10.98	L1	OFF	19.9
1.446000	41.87	---	56.00	14.13	L1	OFF	19.9
1.602000	---	34.84	46.00	11.16	L1	OFF	19.9
1.602000	41.48	---	56.00	14.52	L1	OFF	19.9
1.874000	---	33.10	46.00	12.90	L1	OFF	20.0
1.874000	39.85	---	56.00	16.15	L1	OFF	20.0
2.190000	---	31.16	46.00	14.84	L1	OFF	20.0
2.190000	37.75	---	56.00	18.25	L1	OFF	20.0

EUT Information

Report NO :	5N0610-01
Test Mode :	Mode 1
Test Voltage :	Power from system
Phase :	Neutral

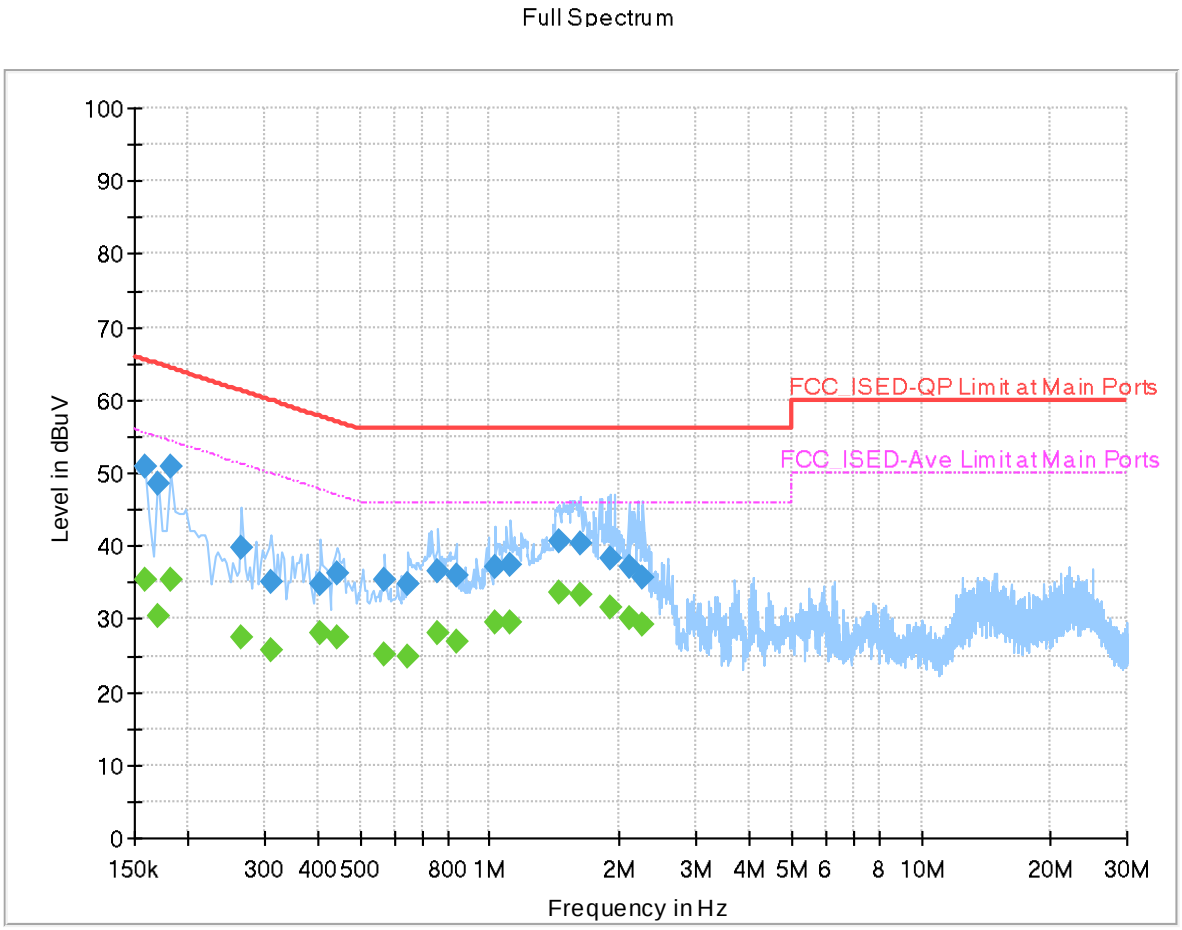

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	35.34	55.57	20.23	N	OFF	19.9
0.158000	50.92	---	65.57	14.65	N	OFF	19.9
0.170000	---	30.48	54.96	24.48	N	OFF	19.9
0.170000	48.40	---	64.96	16.56	N	OFF	19.9
0.182000	---	35.50	54.39	18.89	N	OFF	19.9
0.182000	50.91	---	64.39	13.48	N	OFF	19.9
0.266000	---	27.60	51.24	23.64	N	OFF	19.9
0.266000	39.69	---	61.24	21.55	N	OFF	19.9
0.310000	---	25.66	49.97	24.31	N	OFF	19.9
0.310000	35.11	---	59.97	24.86	N	OFF	19.9
0.406000	---	28.01	47.73	19.72	N	OFF	19.9
0.406000	34.90	---	57.73	22.83	N	OFF	19.9
0.442000	---	27.51	47.02	19.51	N	OFF	19.9
0.442000	36.33	---	57.02	20.69	N	OFF	19.9
0.570000	---	25.17	46.00	20.83	N	OFF	19.9
0.570000	35.31	---	56.00	20.69	N	OFF	19.9
0.646000	---	24.93	46.00	21.07	N	OFF	19.9
0.646000	34.79	---	56.00	21.21	N	OFF	19.9
0.758000	---	28.06	46.00	17.94	N	OFF	19.9

0.758000	36.48	---	56.00	19.52	N	OFF	19.9
0.834000	---	26.86	46.00	19.14	N	OFF	19.9
0.834000	35.87	---	56.00	20.13	N	OFF	19.9
1.030000	---	29.42	46.00	16.58	N	OFF	19.9
1.030000	37.14	---	56.00	18.86	N	OFF	19.9
1.118000	---	29.58	46.00	16.42	N	OFF	19.9
1.118000	37.34	---	56.00	18.66	N	OFF	19.9
1.446000	---	33.74	46.00	12.26	N	OFF	19.9
1.446000	40.63	---	56.00	15.37	N	OFF	19.9
1.622000	---	33.30	46.00	12.70	N	OFF	20.0
1.622000	40.46	---	56.00	15.54	N	OFF	20.0
1.898000	---	31.51	46.00	14.49	N	OFF	20.0
1.898000	38.24	---	56.00	17.76	N	OFF	20.0
2.098000	---	30.26	46.00	15.74	N	OFF	20.0
2.098000	37.06	---	56.00	18.94	N	OFF	20.0
2.270000	---	29.30	46.00	16.70	N	OFF	20.0
2.270000	35.74	---	56.00	20.26	N	OFF	20.0

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou , Lucifer Jiang	**Temperature :**	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

-L	**Low channel location**
-R	**High channel location**

C1-1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	6+7	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	6+7	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	6+7	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	6+7	802.11be EHT20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	6+7	802.11be EHT20	36	5180	MCS0	Partial_106/53RU	-
Mode 6	U-NII-1	5.15-5.25	6+7	802.11be EHT20	44	5220	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	6+7	802.11be EHT20	48	5240	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	6+7	802.11be EHT40	38	5190	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	6+7	802.11be EHT40	38	5190	MCS0	Partial_242/61RU	-
Mode 10	U-NII-1	5.15-5.25	6+7	802.11be EHT40	46	5230	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	6+7	802.11be EHT80	42	5210	MCS0	Full RU	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	6+7	802.11be EHT80	42	5210	MCS0	Partial_484/65RU	-
Mode 13	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	Partial_996/67RU	-
Mode 14	U-NII-2A	5.25-5.35	6+7	802.11a	52	5260	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	6+7	802.11a	60	5300	6Mbps	-	-
Mode 16	U-NII-2A	5.25-5.35	6+7	802.11a	64	5320	6Mbps	-	-
Mode 17	U-NII-2A	5.25-5.35	6+7	802.11be EHT20	52	5260	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	6+7	802.11be EHT20	60	5300	MCS0	Full RU	-
Mode 19	U-NII-2A	5.25-5.35	6+7	802.11be EHT20	64	5320	MCS0	Full RU	-
Mode 20	U-NII-2A	5.25-5.35	6+7	802.11be EHT20	64	5320	MCS0	Partial_106/54RU	-
Mode 21	U-NII-2A	5.25-5.35	6+7	802.11be EHT40	54	5270	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	6+7	802.11be EHT40	62	5310	MCS0	Full RU	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2A	5.25-5.35	6+7	802.11be EHT40	62	5310	MCS0	Partial_242/62RU	-
Mode 24	U-NII-2A	5.25-5.35	6+7	802.11be EHT80	58	5290	MCS0	Full RU	-
Mode 25	U-NII-2A	5.25-5.35	6+7	802.11be EHT80	58	5290	MCS0	Partial_484/66RU	-
Mode 26	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	Full RU	-
Mode 27	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	Partial_996/68RU	-
Mode 28	U-NII-2C	5.47-5.725	6+7	802.11a	100	5500	6Mbps	-	-
Mode 29	U-NII-2C	5.47-5.725	6+7	802.11a	116	5580	6Mbps	-	-
Mode 30	U-NII-2C	5.47-5.725	6+7	802.11a	140	5700	6Mbps	-	-
Mode 31	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	100	5500	MCS0	Full RU	-
Mode 32	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	100	5500	MCS0	Partial_106/53RU	-
Mode 33	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	116	5580	MCS0	Full RU	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	140	5700	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	140	5700	MCS0	Partial_106/54RU	-
Mode 36	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	102	5510	MCS0	Full RU	-
Mode 37	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	102	5510	MCS0	Partial_242/61RU	-
Mode 38	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	110	5550	MCS0	Full RU	-
Mode 39	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	134	5670	MCS0	Full RU	-
Mode 40	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	134	5670	MCS0	Partial_242/62RU	-
Mode 41	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	106	5530	MCS0	Full RU	-
Mode 42	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	106	5530	MCS0	Partial_484/65RU	-
Mode 43	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	122	5610	MCS0	Full RU	-
Mode 44	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	122	5610	MCS0	Partial_484/66RU	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 45	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	Full RU	-
Mode 46	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	Partial_996/67RU	-
Mode 47	U-NII-2C	5.47-5.725	6+7	802.11a	144	5720	6Mbps	-	-
Mode 48	U-NII-2C	5.47-5.725	6+7	802.11be EHT20	144	5720	MCS0	Full RU	-
Mode 49	U-NII-2C	5.47-5.725	6+7	802.11be EHT40	142	5710	MCS0	Full RU	-
Mode 50	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	138	5690	MCS0	Full RU	-
Mode 135	U-NII-1	5.15-5.25	6+7	802.11be EHT80	42	5210	MCS0	20MHz Puncture Location 4	-
Mode 136	U-NII-2A	5.25-5.35	6+7	802.11be EHT80	58	5290	MCS0	20MHz Puncture Location 1	-
Mode 137	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	20MHz Puncture Location 1	-
Mode 138	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	20MHz Puncture Location 8	-
Mode 139	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	40MHz Puncture Location 1	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 140	U-NII-1	5.15-5.25	6+7	802.11be EHT160	50	5250	MCS0	40MHz Puncture Location 4	-
Mode 141	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	106	5530	MCS0	20MHz Puncture Location 4	-
Mode 142	U-NII-2C	5.47-5.725	6+7	802.11be EHT80	122	5610	MCS0	20MHz Puncture Location 1	-
Mode 145	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	20MHz Puncture Location 1	-
Mode 146	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	20MHz Puncture Location 8	-
Mode 147	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	40MHz Puncture Location 1	-
Mode 148	U-NII-2C	5.47-5.725	6+7	802.11be EHT160	114	5570	MCS0	40MHz Puncture Location 4	-
Mode 165	U-NII-2A	5.25-5.35	6+7	802.11be EHT40	62	5310	MCS0	Full RU	LF
Mode 166	U-NII-2A	5.25-5.35	6+7	802.11be EHT40	62	5310	MCS0	Full RU	SHF

C1-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.94	51.57	54.00	-2.43	H	Avg.	Pass	-	Band Edge
	802.11a	36	15540.00	45.19	54.00	-8.81	H	Avg.	Pass	-	Harmonic
2	802.11a	44	5149.82	51.19	54.00	-2.81	H	Avg.	Pass	-	Band Edge
	802.11a	44	15660.00	44.93	54.00	-9.07	H	Avg.	Pass	-	Harmonic
3	802.11a	48	5350.22	43.17	54.00	-10.83	V	Avg.	Pass	-	Band Edge
	802.11a	48	15720.00	45.50	54.00	-8.50	V	Avg.	Pass	-	Harmonic
4	802.11be EHT20	36	5149.76	51.74	54.00	-2.26	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	36	15540.00	45.23	54.00	-8.77	V	Avg.	Pass	Full RU	Harmonic
5	802.11be EHT20	36	5149.94	49.66	54.00	-4.34	H	Avg.	Pass	Partial_106/53RU	Band Edge
	802.11be EHT20	36	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
6	802.11be EHT20	44	5149.82	43.35	54.00	-10.65	H	Avg.	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11be EHT20	44	15660.00	45.09	54.00	-8.91	H	Avg.	Pass	Full RU	Harmonic
7	802.11be EHT20	48	5353.30	43.98	54.00	-10.02	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	48	15720.00	45.45	54.00	-8.55	V	Avg.	Pass	Full RU	Harmonic
8	802.11be EHT40	38	5146.49	48.84	54.00	-5.16	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	38	15570.00	45.22	54.00	-8.78	V	Avg.	Pass	Full RU	Harmonic
9	802.11be EHT40	38	5149.91	52.86	54.00	-1.14	H	Avg.	Pass	Partial_242/61RU	Band Edge
	802.11be EHT40	38	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
10	802.11be EHT40	46	5149.96	50.45	54.00	-3.55	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	46	15690.00	45.11	54.00	-8.89	H	Avg.	Pass	Full RU	Harmonic
11	802.11be EHT80	42	5145.32	50.74	54.00	-3.26	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	42	15630.00	45.22	54.00	-8.78	V	Avg.	Pass	Full RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11be EHT80	42	5148.68	52.85	54.00	-1.15	H	Avg.	Pass	Partial_484/65RU	Band Edge
	802.11be EHT80	42	-	-	-	-	-	-	-	Partial_484/65RU	Harmonic
13	802.11be EHT160	50	5141.50	52.14	54.00	-1.86	H	Avg.	Pass	Partial_996/67RU	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	Partial_996/67RU	Harmonic
14	802.11a	52	5357.60	43.93	54.00	-10.07	V	Avg.	Pass	-	Band Edge
	802.11a	52	15780.00	45.62	54.00	-8.38	V	Avg.	Pass	-	Harmonic
15	802.11a	60	5352.80	52.19	54.00	-1.81	V	Avg.	Pass	-	Band Edge
	802.11a	60	15900.00	45.69	54.00	-8.31	H	Avg.	Pass	-	Harmonic
16	802.11a	64	5352.48	52.64	54.00	-1.36	H	Avg.	Pass	-	Band Edge
	802.11a	64	15960.00	56.43	74.00	-17.57	H	Peak	Pass	-	Harmonic
17	802.11be EHT20	52	5358.00	44.29	54.00	-9.71	V	Avg.	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11be EHT20	52	15780.00	45.66	54.00	-8.34	V	Avg.	Pass	Full RU	Harmonic
18	802.11be EHT20	60	5350.08	51.67	54.00	-2.33	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	60	15900.00	45.45	54.00	-8.55	H	Avg.	Pass	Full RU	Harmonic
19	802.11be EHT20	64	5350.38	48.82	54.00	-5.18	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	64	15960.00	45.28	54.00	-8.72	V	Avg.	Pass	Full RU	Harmonic
20	802.11be EHT20	64	5350.10	47.00	54.00	-7.00	V	Avg.	Pass	Partial_106/54RU	Band Edge
	802.11be EHT20	64	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
21	802.11be EHT40	54	5360.06	51.99	54.00	-2.01	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	54	15810.00	45.59	54.00	-8.41	H	Avg.	Pass	Full RU	Harmonic
22	802.11be EHT40	62	5350.05	52.94	54.00	-1.06	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	62	15930.00	45.36	54.00	-8.64	H	Avg.	Pass	Full RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11be EHT40	62	5350.05	51.92	54.00	-2.08	V	Avg.	Pass	Partial_242/62RU	Band Edge
	802.11be EHT40	62	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic
24	802.11be EHT80	58	5361.40	51.70	54.00	-2.30	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	58	15870.00	45.28	54.00	-8.72	V	Avg.	Pass	Full RU	Harmonic
25	802.11be EHT80	58	5357.32	49.15	54.00	-4.85	H	Avg.	Pass	Partial_484/66RU	Band Edge
	802.11be EHT80	58	-	-	-	-	-	-	-	Partial_484/66RU	Harmonic
26	802.11be EHT160	50	5402.46	52.80	54.00	-1.20	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT160	50	15750.00	45.43	54.00	-8.57	H	Avg.	Pass	Full RU	Harmonic
27	802.11be EHT160	50	5363.61	51.86	54.00	-2.14	H	Avg.	Pass	Partial_996/68RU	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	Partial_996/68RU	Harmonic
28	802.11a	100	5463.25	63.75	68.20	-4.45	H	Peak	Pass	-	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11a	100	16500.00	55.39	68.20	-12.81	V	Peak	Pass	-	Harmonic
29	802.11a	116	5459.25	41.27	54.00	-12.73	H	Avg.	Pass	-	Band Edge
	802.11a	116	11160.00	41.44	54.00	-12.56	V	Avg.	Pass	-	Harmonic
30	802.11a	140	5727.37	64.14	68.20	-4.06	V	Peak	Pass	-	Band Edge
	802.11a	140	11400.00	42.99	54.00	-11.01	V	Avg.	Pass	-	Harmonic
31	802.11be EHT20	100	5466.25	66.29	68.20	-1.91	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	100	16500.00	55.45	68.20	-12.75	V	Peak	Pass	Full RU	Harmonic
32	802.11be EHT20	100	5470.00	65.71	68.20	-2.49	V	Peak	Pass	Partial_106/53RU	Band Edge
	802.11be EHT20	100	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
33	802.11be EHT20	116	5459.71	41.54	54.00	-12.46	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	116	11160.00	40.22	54.00	-13.78	H	Avg.	Pass	Full RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11be EHT20	140	5725.03	59.99	68.20	-8.21	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	140	17100.00	56.21	68.20	-11.99	V	Peak	Pass	Full RU	Harmonic
35	802.11be EHT20	140	5725.29	63.42	68.20	-4.78	V	Peak	Pass	Partial_106/54RU	Band Edge
	802.11be EHT20	140	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
36	802.11be EHT40	102	5463.28	66.08	68.20	-2.12	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT40	102	16530.00	56.22	68.20	-11.98	H	Peak	Pass	Full RU	Harmonic
37	802.11be EHT40	102	5463.76	65.47	68.20	-2.73	V	Peak	Pass	Partial_242/61RU	Band Edge
	802.11be EHT40	102	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
38	802.11be EHT40	110	5460.00	45.64	54.00	-8.36	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	110	16650.00	55.96	68.20	-12.24	H	Peak	Pass	Full RU	Harmonic
39	802.11be EHT40	134	5728.52	63.27	68.20	-4.93	H	Peak	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
39	802.11be EHT40	134	11340.00	41.24	54.00	-12.76	V	Avg.	Pass	Full RU	Harmonic
40	802.11be EHT40	134	5725.48	63.60	68.20	-4.60	H	Peak	Pass	Partial_242/62RU	Band Edge
	802.11be EHT40	134	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic
41	802.11be EHT80	106	5459.98	51.99	54.00	-2.01	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	106	16590.00	55.34	68.20	-12.86	H	Peak	Pass	Full RU	Harmonic
42	802.11be EHT80	106	5459.98	45.94	54.00	-8.06	V	Avg.	Pass	Partial_484/65RU	Band Edge
	802.11be EHT80	106	-	-	-	-	-	-	-	Partial_484/65RU	Harmonic
43	802.11be EHT80	122	5458.94	48.37	54.00	-5.63	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	122	16830.00	56.04	68.20	-12.16	H	Peak	Pass	Full RU	Harmonic
44	802.11be EHT80	122	5725.01	65.00	68.20	-3.20	V	Peak	Pass	Partial_484/66RU	Band Edge
	802.11be EHT80	122	-	-	-	-	-	-	-	Partial_484/66RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
45	802.11be EHT160	114	5725.81	65.91	68.20	-2.29	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT160	114	16710.00	55.80	68.20	-12.40	H	Peak	Pass	Full RU	Harmonic
46	802.11be EHT160	114	5448.56	52.65	54.00	-1.35	H	Avg.	Pass	Partial_996/67RU	Band Edge
	802.11be EHT160	114	-	-	-	-	-	-	-	Partial_996/67RU	Harmonic
47	802.11a	144	5453.35	37.87	54.00	-16.13	V	Avg.	Pass	-	Band Edge
	802.11a	144	11440.00	43.60	54.00	-10.40	V	Avg.	Pass	-	Harmonic
48	802.11be EHT20	144	5459.59	37.64	54.00	-16.36	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	144	17160.00	55.53	68.20	-12.67	H	Peak	Pass	Full RU	Harmonic
49	802.11be EHT40	142	5459.98	38.00	54.00	-16.00	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	142	17130.00	55.99	68.20	-12.21	V	Peak	Pass	Full RU	Harmonic
50	802.11be EHT80	138	5459.98	42.42	54.00	-11.58	H	Avg.	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
50	802.11be EHT80	138	17070.00	55.65	68.20	-12.55	V	Peak	Pass	Full RU	Harmonic
135	802.11be EHT80	42	5149.52	52.04	54.00	-1.96	H	Avg.	Pass	20MHz Puncture Location 4	Band Edge
	802.11be EHT80	42	-	-	-	-	-	-	-	20MHz Puncture Location 4	Harmonic
136	802.11be EHT80	58	5358.85	51.19	54.00	-2.81	H	Avg.	Pass	20MHz Puncture Location 1	Band Edge
	802.11be EHT80	58	-	-	-	-	-	-	-	20MHz Puncture Location 1	Harmonic
137	802.11be EHT160	50	5122.75	50.85	54.00	-3.15	H	Avg.	Pass	20MHz Puncture Location 1	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	20MHz Puncture Location 1	Harmonic
138	802.11be EHT160	50	5125.50	50.00	54.00	-4.00	H	Avg.	Pass	20MHz Puncture Location 8	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	20MHz Puncture Location 8	Harmonic

139	802.11be EHT160	50	5361.72	52.31	54.00	-1.69	H	Avg.	Pass	40MHz Puncture Location 1	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	40MHz Puncture Location 1	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
140	802.11be EHT160	50	5145.25	52.50	54.00	-1.50	H	Avg.	Pass	40MHz Puncture Location 4	Band Edge
	802.11be EHT160	50	-	-	-	-	-	-	-	40MHz Puncture Location 4	Harmonic
141	802.11be EHT80	106	5459.98	49.53	54.00	-4.47	V	Avg.	Pass	20MHz Puncture Location 4	Band Edge
	802.11be EHT80	106	-	-	-	-	-	-	-	20MHz Puncture Location 4	Harmonic
142	802.11be EHT80	122	5456.34	45.55	54.00	-8.45	H	Avg.	Pass	20MHz Puncture Location 1	Band Edge
	802.11be EHT80	122	-	-	-	-	-	-	-	20MHz Puncture Location 1	Harmonic

145	802.11be EHT160	114	5460.00	51.76	54.00	-2.24	V	Avg.	Pass	20MHz Puncture Location 1	Band Edge
	802.11be EHT160	114	-	-	-	-	-	-	-	20MHz Puncture Location 1	Harmonic
146	802.11be EHT160	114	5443.72	50.91	54.00	-3.09	H	Avg.	Pass	20MHz Puncture Location 8	Band Edge
	802.11be EHT160	114	-	-	-	-	-	-	-	20MHz Puncture Location 8	Harmonic
147	802.11be EHT160	114	5729.32	66.59	68.20	-1.61	H	Peak	Pass	40MHz Puncture Location 1	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
147	802.11be EHT160	114	-	-	-	-	-	-	-	40MHz Puncture Location 1	Harmonic
148	802.11be EHT160	114	5444.82	51.59	54.00	-2.41	H	Avg.	Pass	40MHz Puncture Location 4	Band Edge
	802.11be EHT160	114	-	-	-	-	-	-	-	40MHz Puncture Location 4	Harmonic
165	LF	62	38.73	30.86	40.00	-9.14	V	Peak	Pass	-	LF
166	SHF	62	39616.47	46.86	74.00	-27.14	H	Peak	Pass	-	SHF

Mode	1	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	6+7	
Pol.	6+7	Fundamental
Peak	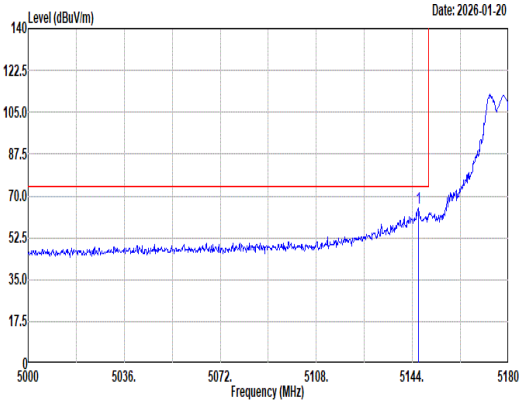 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.16 64.82 74.00 -9.18 57.81 32.69 12.19 37.87 0.00 118 344 Peak	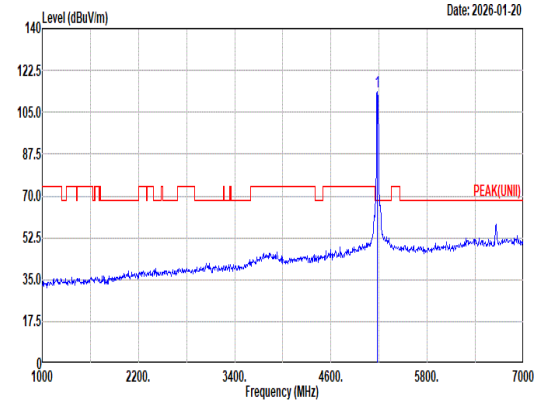 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 113.79 ------ ------ 106.81 32.65 12.22 37.89 0.00 118 344 Peak
Avg	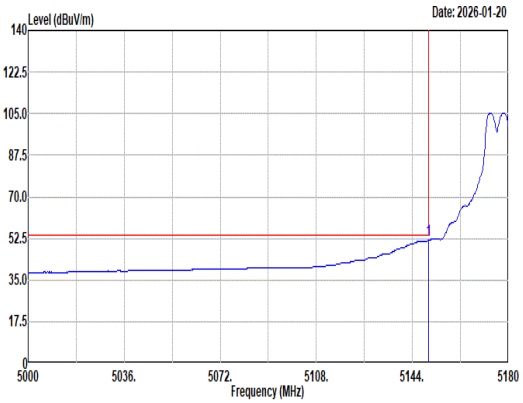 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 51.57 54.00 -2.43 44.54 32.70 12.20 37.87 0.00 118 344 Average	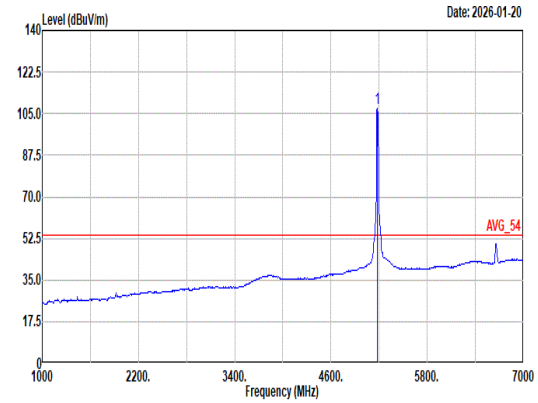 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.99 ------ ------ 100.01 32.65 12.22 37.89 0.00 118 344 Average

Mode	1	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	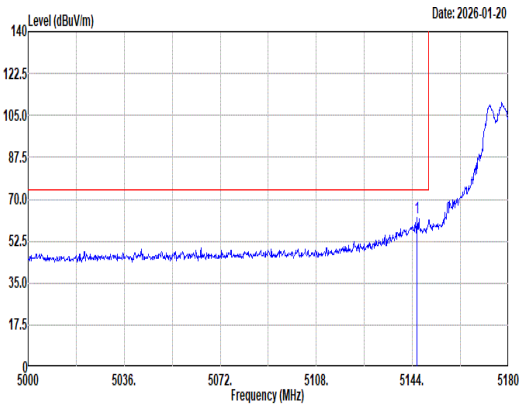 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.80 62.11 74.00 -11.89 55.10 32.69 12.19 37.87 0.00 100 87 Peak	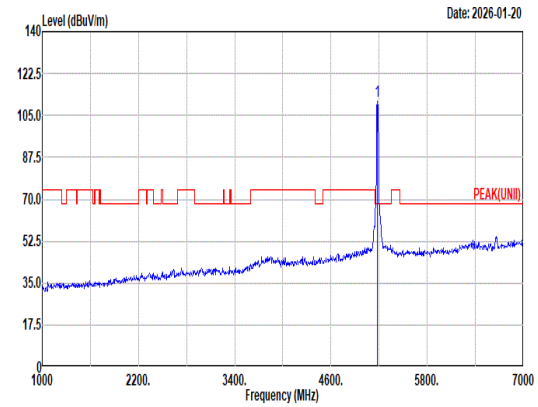 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 110.85 ------ ------ 103.87 32.65 12.22 37.89 0.00 100 87 Peak
Avg	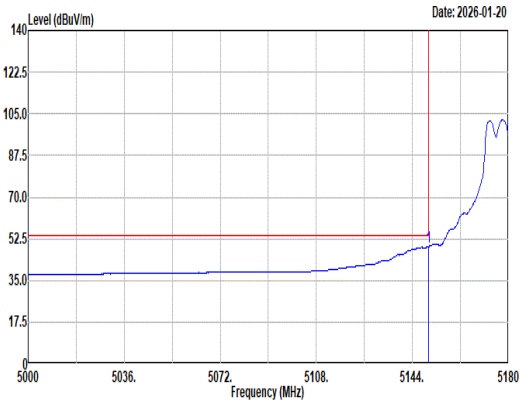 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 49.15 54.00 -4.85 42.12 32.70 12.20 37.87 0.00 100 87 Average	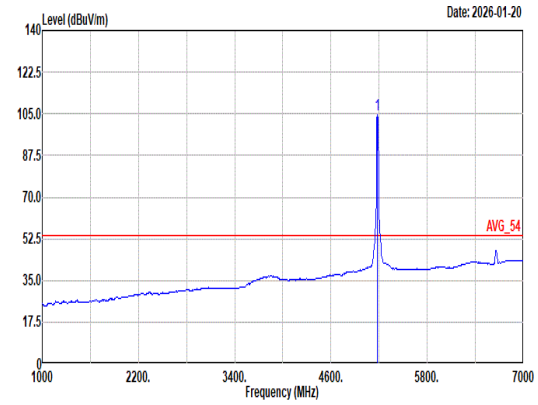 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 104.38 ------ ------ 97.40 32.64 12.23 37.89 0.00 100 87 Average

Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	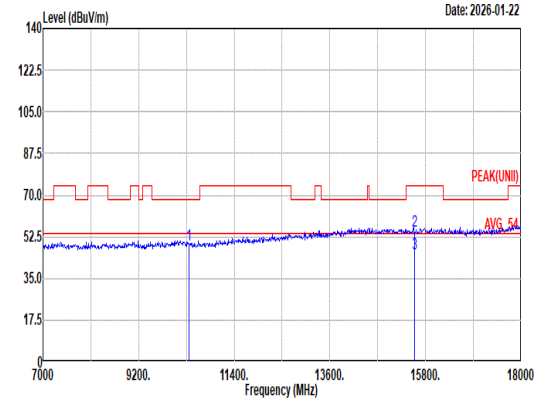 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 49.15 68.20 -19.05 34.29 37.48 18.54 41.72 0.56 -- -- Peak 2 15540.00 54.84 74.00 -19.16 36.03 41.12 22.29 45.25 0.65 -- -- Peak 3 15540.00 45.19 54.00 -8.81 26.38 41.12 22.29 45.25 0.65 -- -- Average	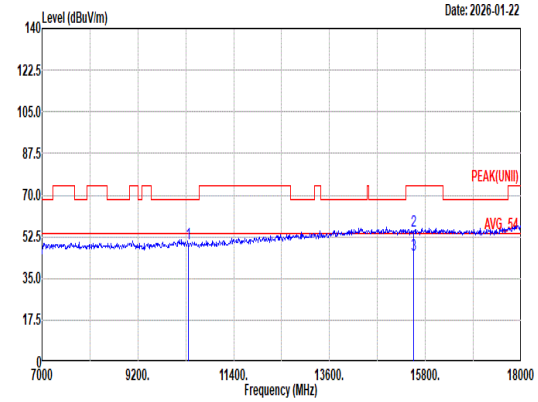 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 49.62 68.20 -18.58 34.79 37.46 18.54 41.73 0.56 -- -- Peak 2 15536.00 54.68 74.00 -19.32 35.86 41.13 22.29 45.25 0.65 -- -- Peak 3 15536.00 45.15 54.00 -8.85 26.33 41.13 22.29 45.25 0.65 -- -- Average

Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	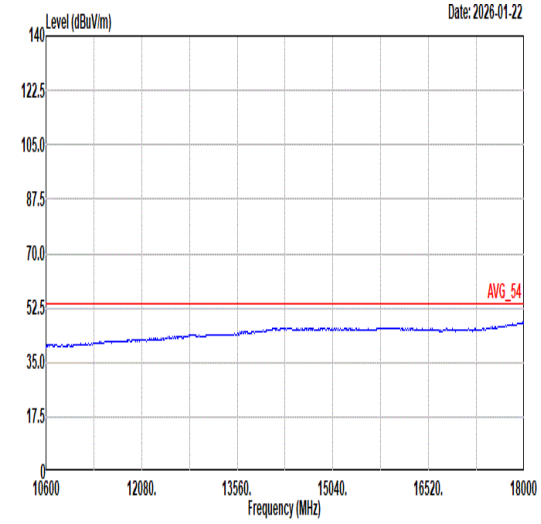 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	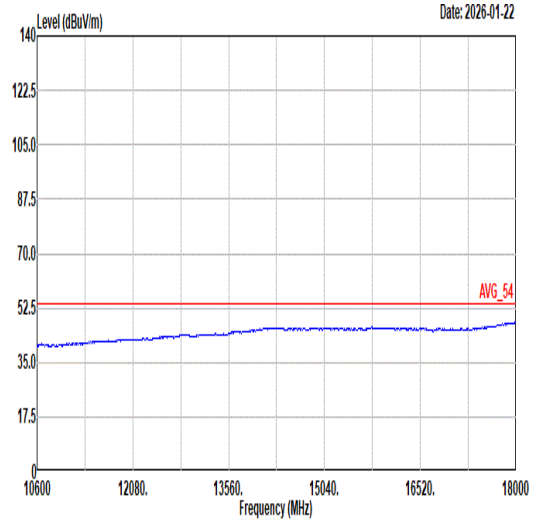 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	2	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	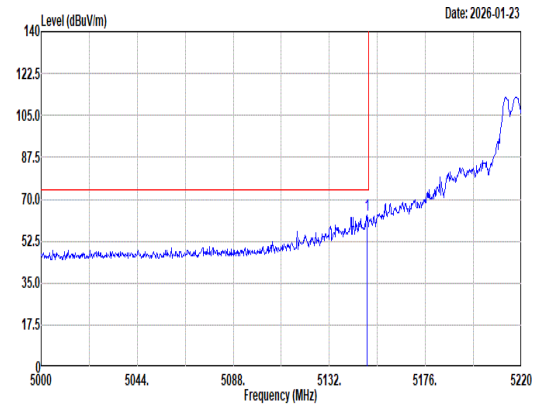 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.38 63.25 74.00 -10.75 56.22 32.70 12.20 37.87 0.00 183 345 Peak	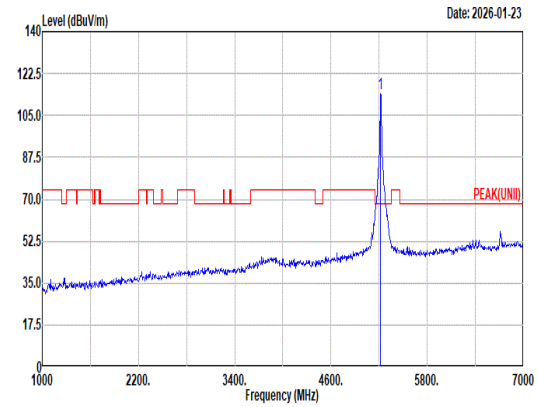 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 114.09 ------ ------ 107.11 32.56 12.34 37.92 0.00 183 345 Peak
Avg	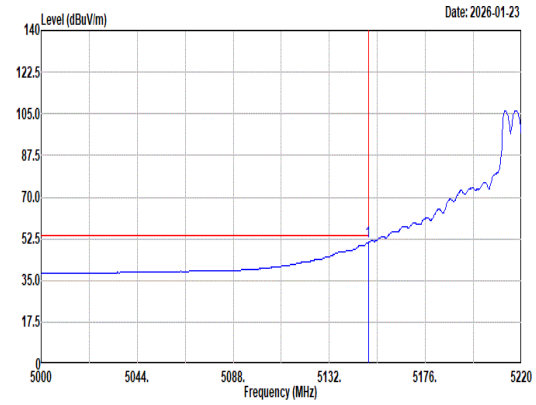 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.82 51.19 54.00 -2.81 44.16 32.70 12.20 37.87 0.00 183 345 Average	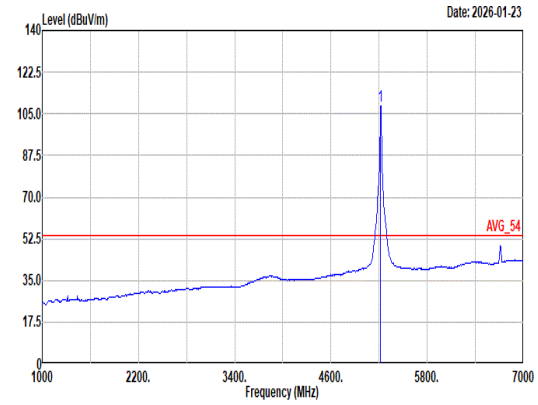 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 108.31 ------ ------ 101.31 32.55 12.37 37.92 0.00 183 345 Average

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	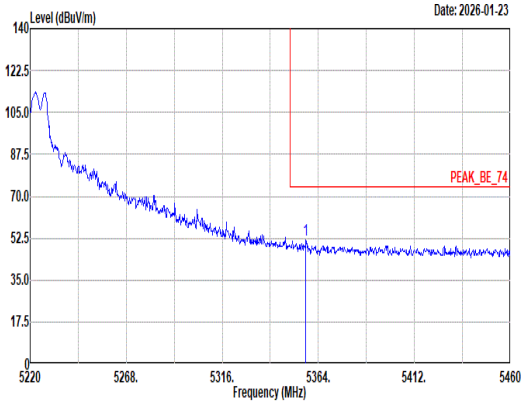 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.76 51.80 74.00 -22.20 44.39 32.38 13.04 38.01 0.00 183 345 Peak	Blank
Avg	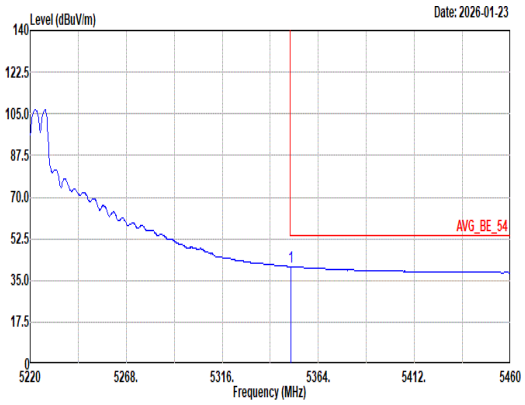 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.32 40.79 54.00 -13.21 33.40 32.40 13.00 38.01 0.00 183 345 Average	Blank

Mode	2	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	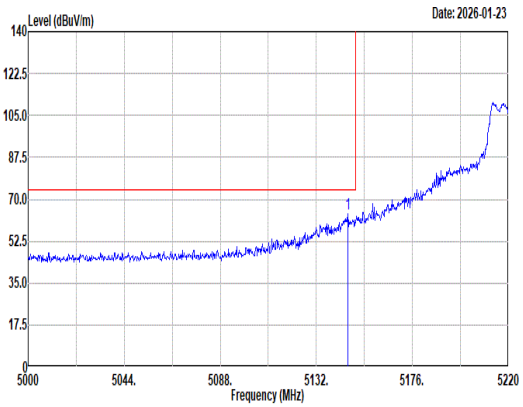 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5146.30 63.87 74.00 -10.13 56.86 32.69 12.19 37.87 0.00 100 87 Peak	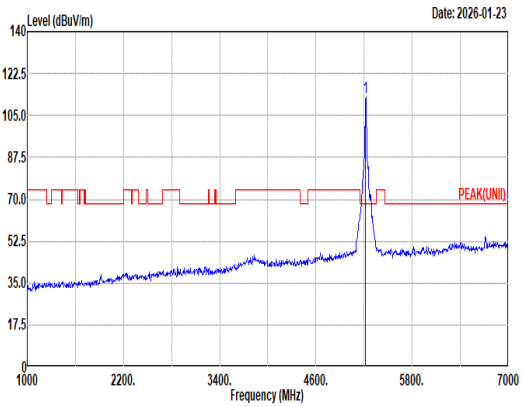 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5220.00 112.45 ------ ------ 105.45 32.55 12.37 37.92 0.00 100 87 Peak
Avg	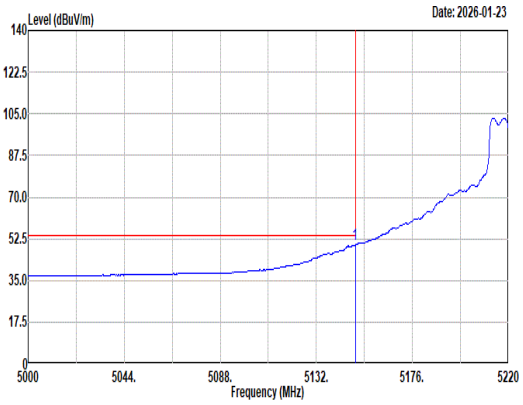 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.82 49.98 54.00 -4.02 42.95 32.70 12.20 37.87 0.00 100 87 Average	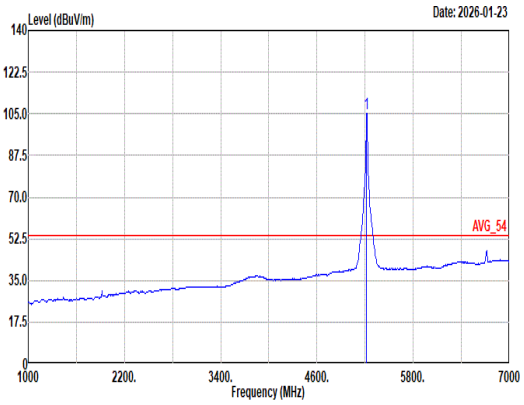 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5220.00 105.26 ------ ------ 98.26 32.55 12.37 37.92 0.00 100 87 Average

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	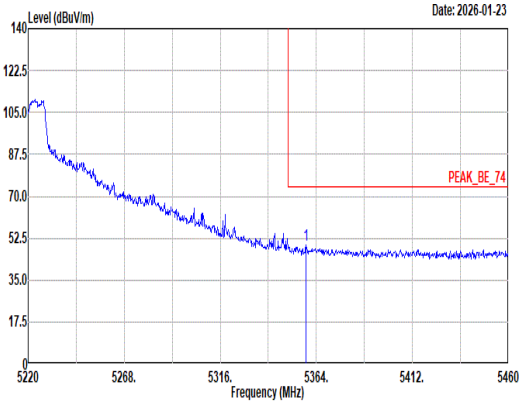 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.72 49.43 74.00 -24.57 42.02 32.38 13.04 38.01 0.00 100 87 Peak	Blank
Avg	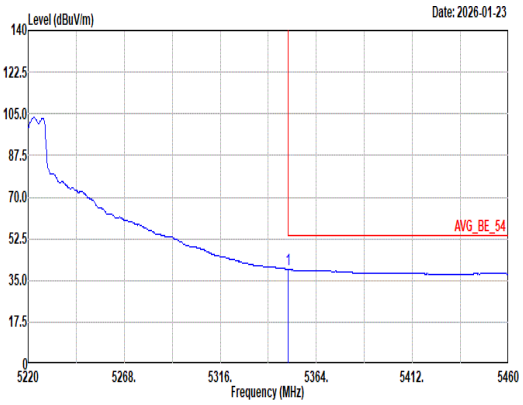 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 39.59 54.00 -14.41 32.20 32.40 13.00 38.01 0.00 100 87 Average	Blank

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	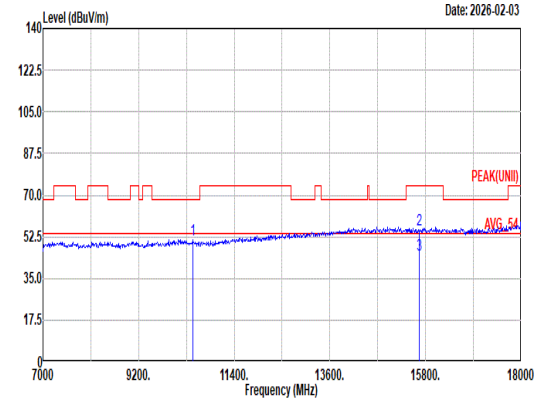 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 51.04 68.20 -17.16 36.46 37.30 18.53 41.81 0.56 -- -- Peak 2 15660.00 55.62 74.00 -18.38 36.79 40.94 22.39 45.15 0.65 -- -- Peak 3 15660.00 44.93 54.00 -9.07 26.10 40.94 22.39 45.15 0.65 -- -- Average	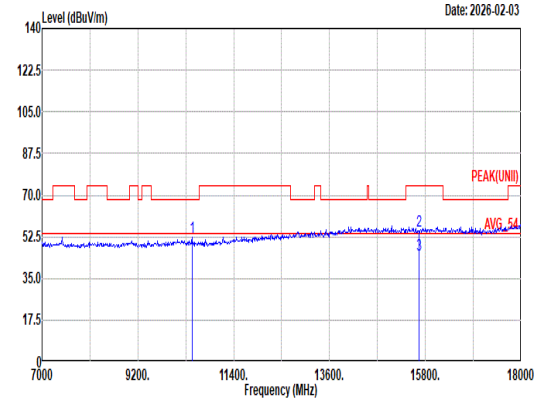 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 52.28 68.20 -15.92 37.70 37.30 18.53 41.81 0.56 -- -- Peak 2 15660.00 55.16 74.00 -18.84 36.33 40.94 22.39 45.15 0.65 -- -- Peak 3 15660.00 44.91 54.00 -9.09 26.08 40.94 22.39 45.15 0.65 -- -- Average

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	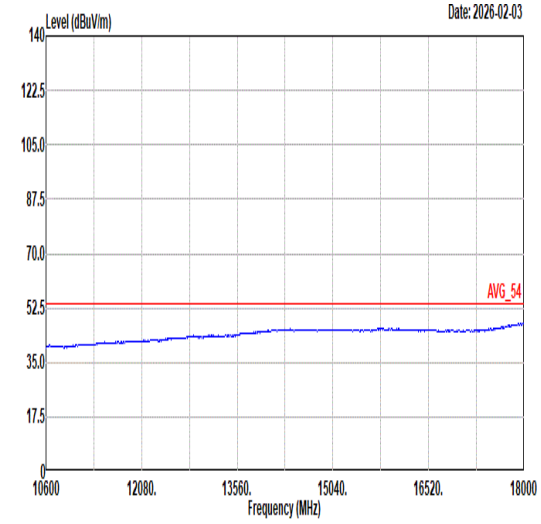 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	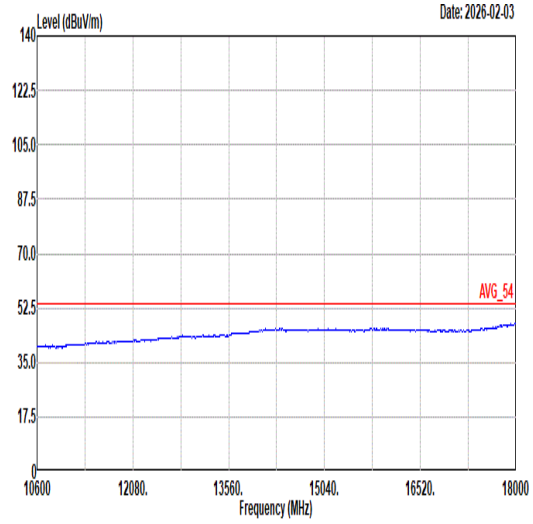 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	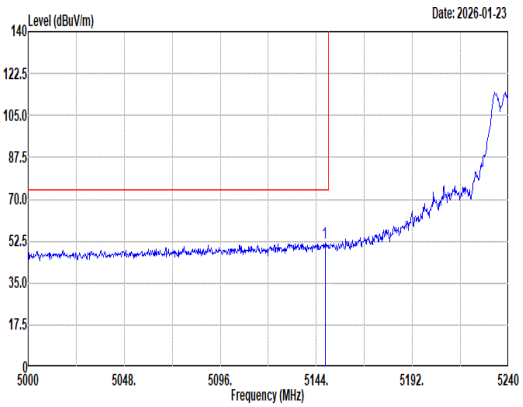 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.32 51.77 74.00 -22.23 44.74 32.70 12.20 37.87 0.00 105 343 Peak	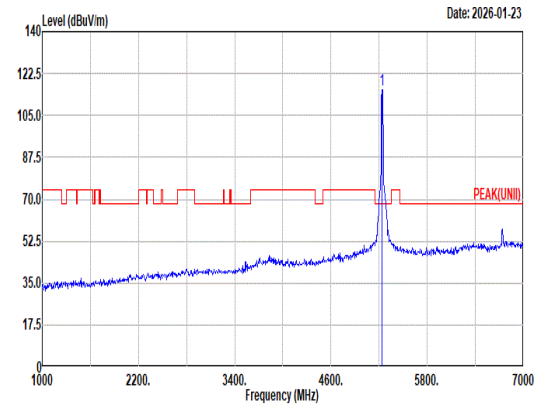 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 115.71 ------ ------ 108.68 32.53 12.43 37.93 0.00 105 343 Peak
Avg	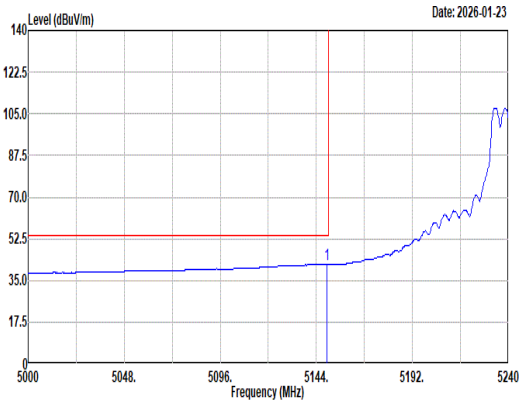 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.28 41.77 54.00 -12.23 34.74 32.70 12.20 37.87 0.00 105 343 Average	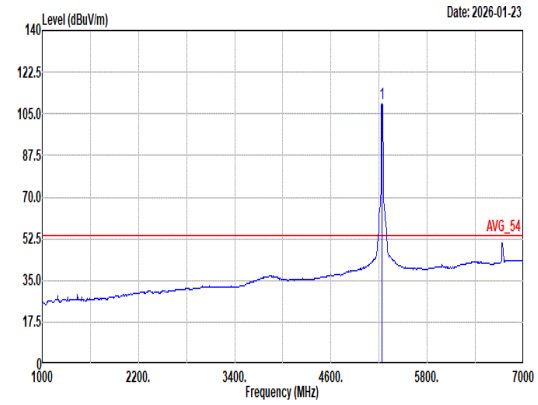 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 109.25 ------ ------ 102.22 32.53 12.43 37.93 0.00 105 343 Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	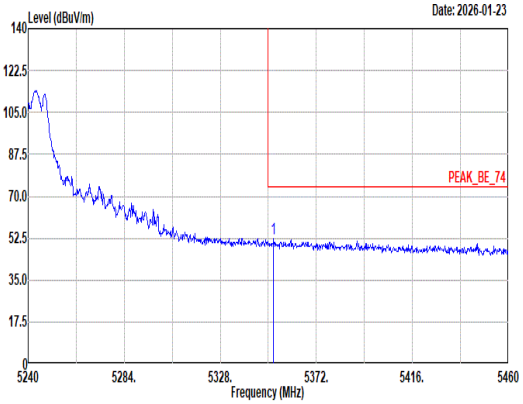 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.42 52.13 74.00 -21.87 44.73 32.40 13.01 38.01 0.00 105 343 Peak	Blank
Avg	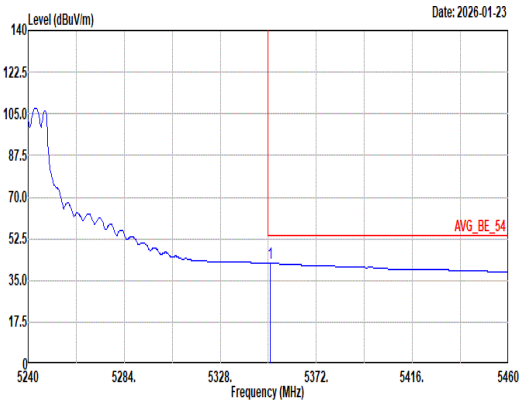 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.88 42.24 54.00 -11.76 34.85 32.40 13.00 38.01 0.00 105 343 Average	Blank

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	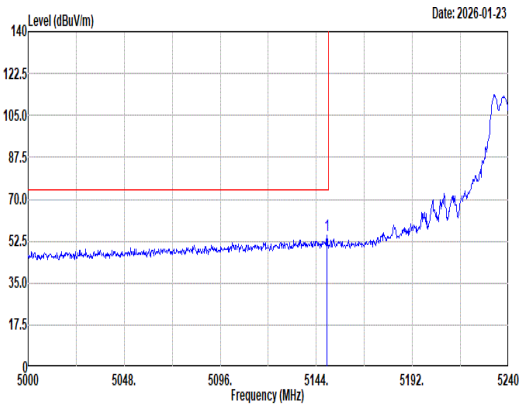 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5149.28 54.98 74.00 -19.02 47.95 32.70 12.20 37.87 0.00 222 23 Peak	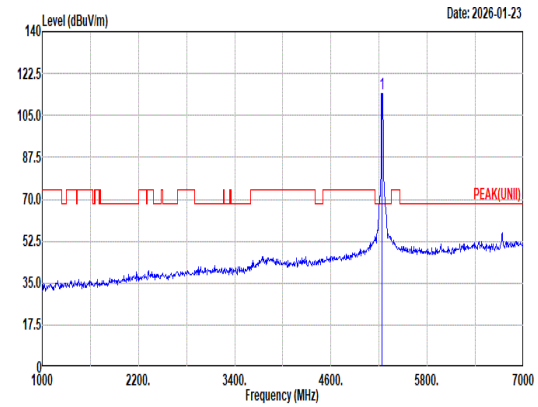 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5240.00 114.36 ------ ------ 107.33 32.53 12.43 37.93 0.00 222 23 Peak
Avg	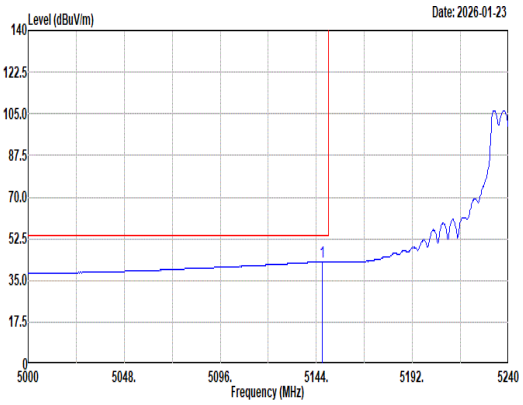 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5147.12 42.88 54.00 -11.12 35.87 32.69 12.19 37.87 0.00 222 23 Average	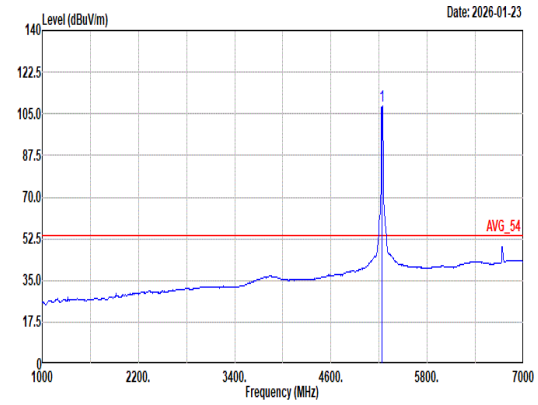 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5240.00 108.05 ------ ------ 101.00 32.52 12.46 37.93 0.00 222 23 Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	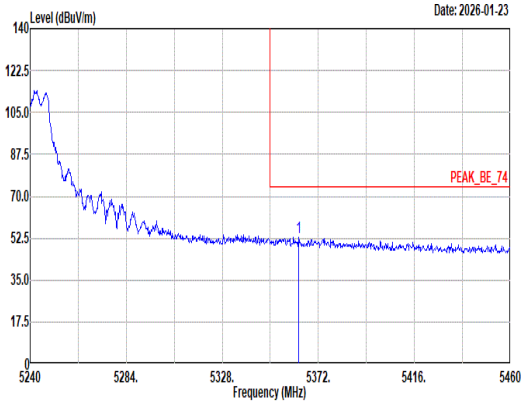 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.98 53.09 74.00 -20.91 45.68 32.37 13.06 38.02 0.00 222 23 Peak	Blank
Avg	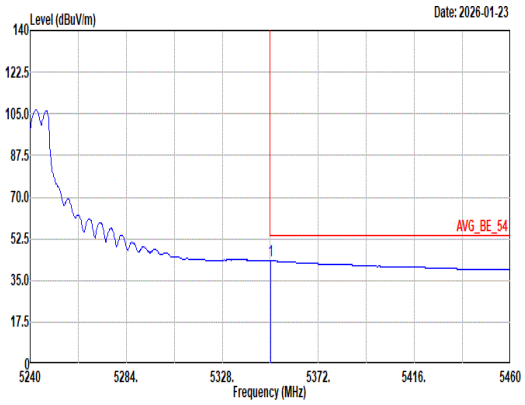 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.22 43.17 54.00 -10.83 35.78 32.40 13.00 38.01 0.00 222 23 Average	Blank

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	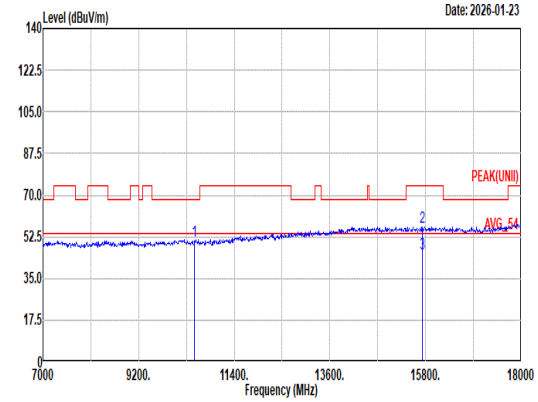 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 50.81 68.20 -17.39 36.21 37.36 18.53 41.85 0.56 -- -- Peak 2 15720.00 56.43 74.00 -17.57 37.22 41.22 22.44 45.10 0.65 -- -- Peak 3 15720.00 45.46 54.00 -8.54 26.25 41.22 22.44 45.10 0.65 -- -- Average	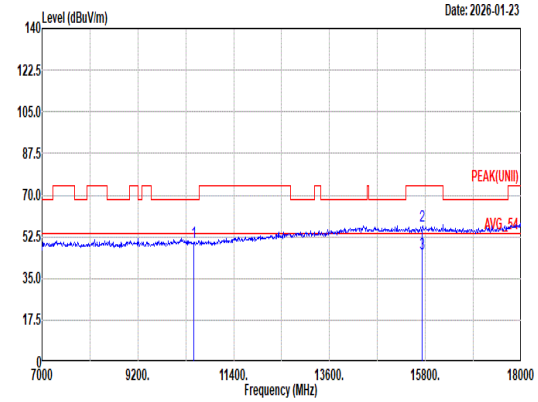 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 50.28 68.20 -17.92 35.68 37.36 18.53 41.85 0.56 -- -- Peak 2 15720.00 57.01 74.00 -16.99 37.80 41.22 22.44 45.10 0.65 -- -- Peak 3 15720.00 45.50 54.00 -8.50 26.29 41.22 22.44 45.10 0.65 -- -- Average

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	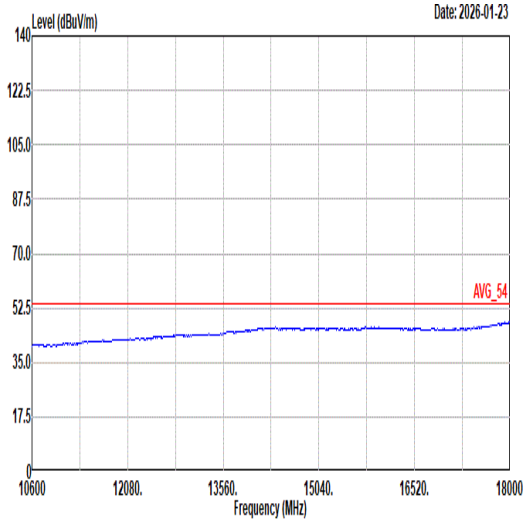 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	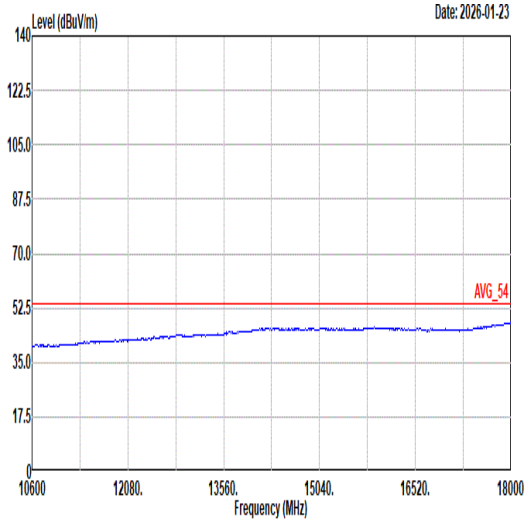 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	4	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	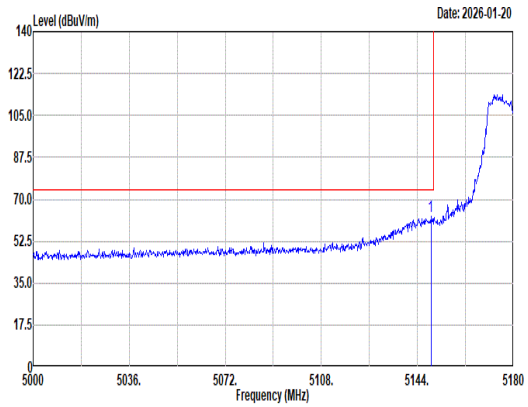 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.04 62.98 74.00 -11.02 55.95 32.70 12.20 37.87 0.00 101 344 Peak	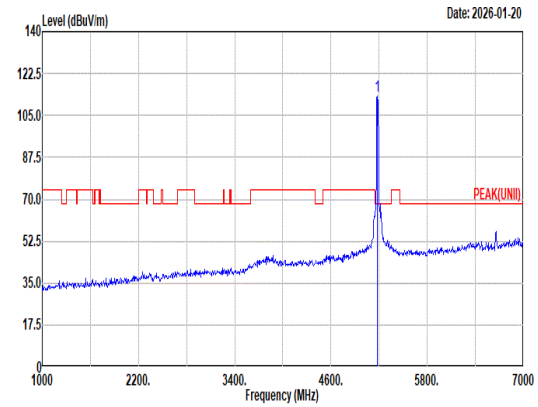 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 113.04 ------ ------ 106.06 32.65 12.22 37.89 0.00 101 344 Peak
Avg	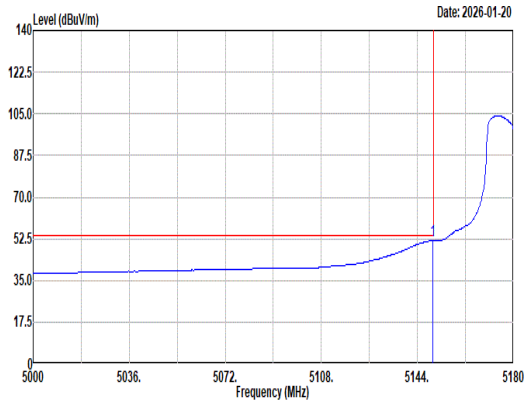 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 51.74 54.00 -2.26 44.71 32.70 12.20 37.87 0.00 101 344 Average	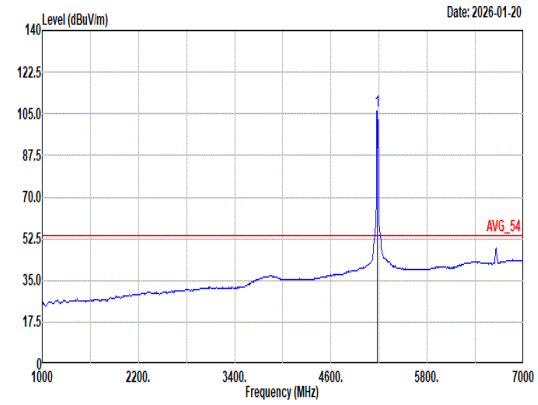 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.22 ------ ------ 99.24 32.65 12.22 37.89 0.00 101 344 Average

Mode	4	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	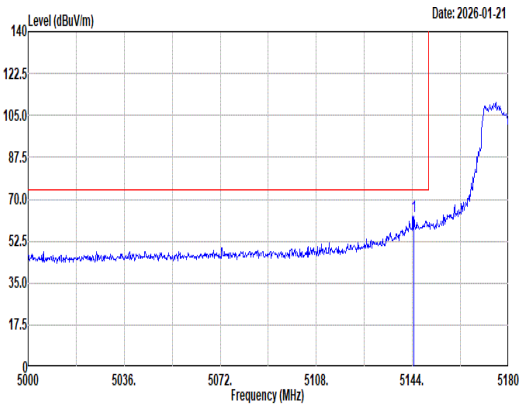 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.54 62.88 74.00 -11.12 55.87 32.69 12.19 37.87 0.00 100 89 Peak	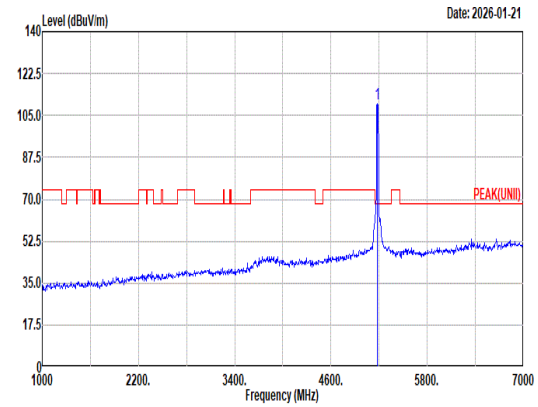 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 110.12 ------ ------ 103.14 32.65 12.22 37.89 0.00 100 89 Peak
Avg	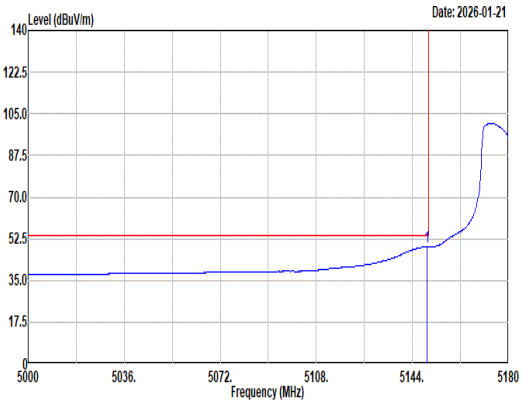 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.58 49.29 54.00 -4.71 42.26 32.70 12.20 37.87 0.00 100 89 Average	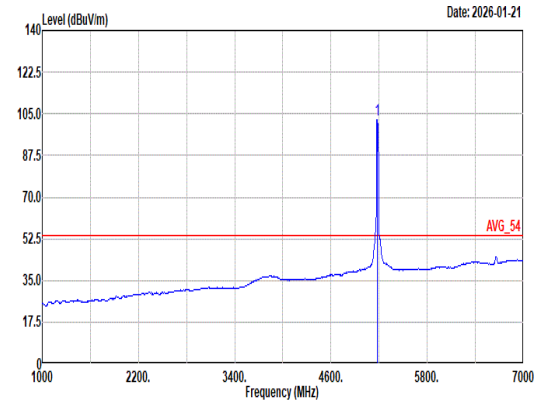 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 102.65 ------ ------ 95.67 32.65 12.22 37.89 0.00 100 89 Average

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	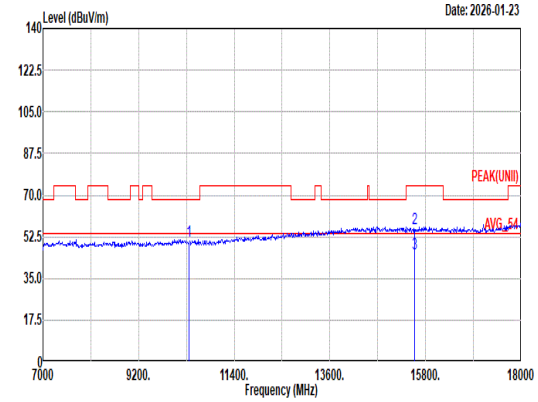 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 50.53 68.20 -17.67 35.70 37.46 18.54 41.73 0.56 -- -- Peak 2 15540.00 55.86 74.00 -18.14 37.05 41.12 22.29 45.25 0.65 -- -- Peak 3 15540.00 45.18 54.00 -8.82 26.37 41.12 22.29 45.25 0.65 -- -- Average	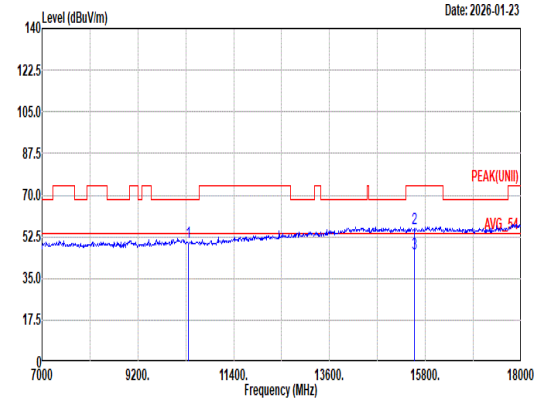 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 50.44 68.20 -17.76 35.61 37.46 18.54 41.73 0.56 -- -- Peak 2 15540.00 55.82 74.00 -18.18 37.01 41.12 22.29 45.25 0.65 -- -- Peak 3 15540.00 45.23 54.00 -8.77 26.42 41.12 22.29 45.25 0.65 -- -- Average

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	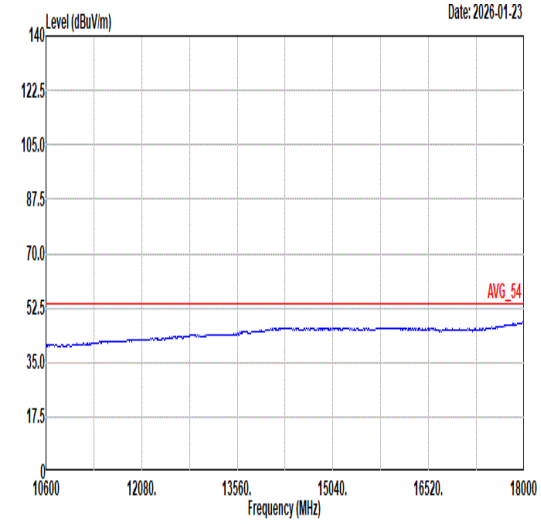 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	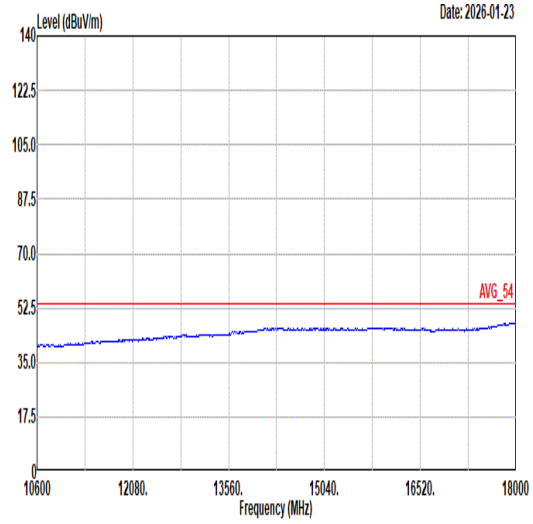 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	5	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_106/53RU _5180MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	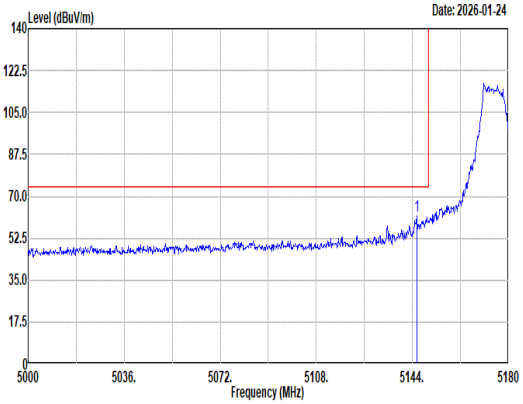 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 61.96 74.00 -12.04 54.95 32.69 12.19 37.87 0.00 111 340 Peak	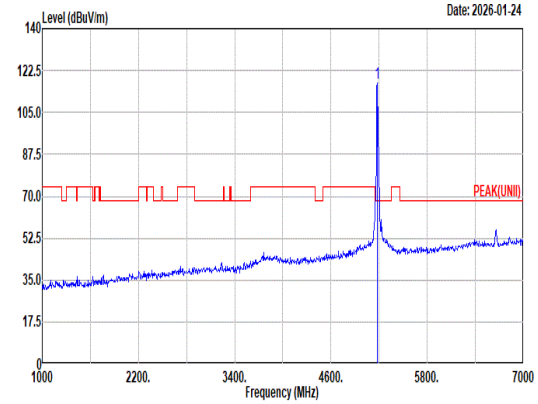 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 117.25 ------ ------ 110.27 32.65 12.22 37.89 0.00 111 340 Peak
Avg	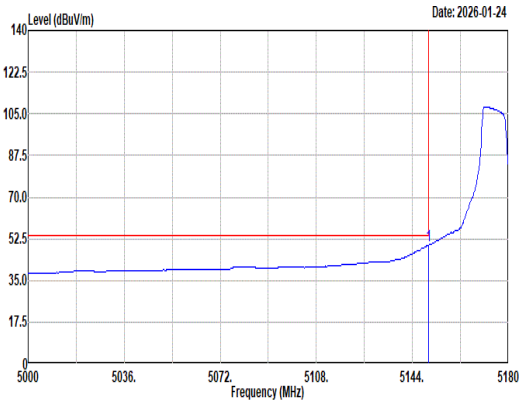 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 49.66 54.00 -4.34 42.63 32.70 12.20 37.87 0.00 111 340 Average	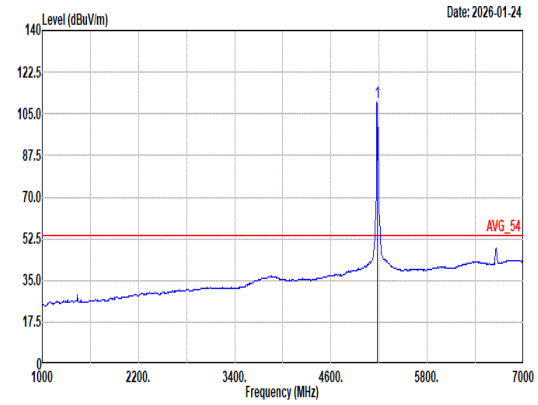 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.70 ------ ------ 102.71 32.66 12.22 37.89 0.00 111 340 Average

Mode	5	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_106/53RU _5180MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	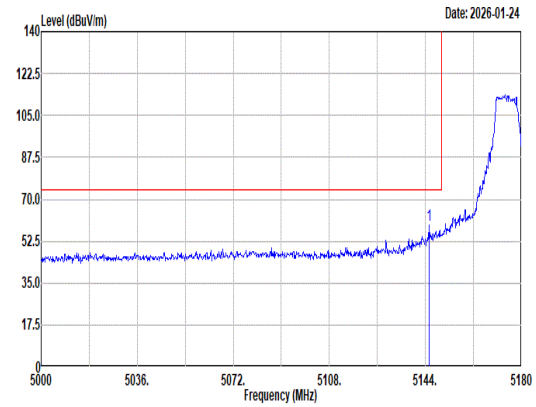 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5145.44 59.33 74.00 -14.67 52.32 32.69 12.19 37.87 0.00 100 97 Peak	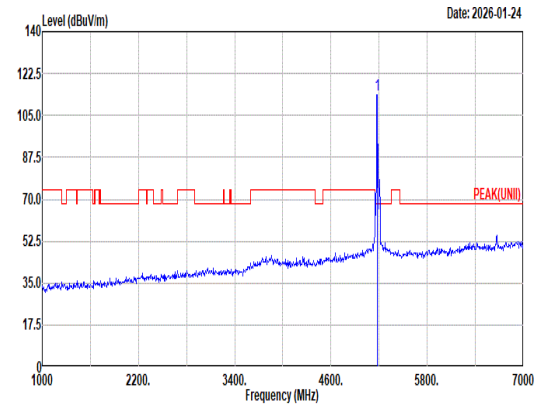 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5180.00 113.64 ------ ------ 106.66 32.65 12.22 37.89 0.00 100 97 Peak
Avg	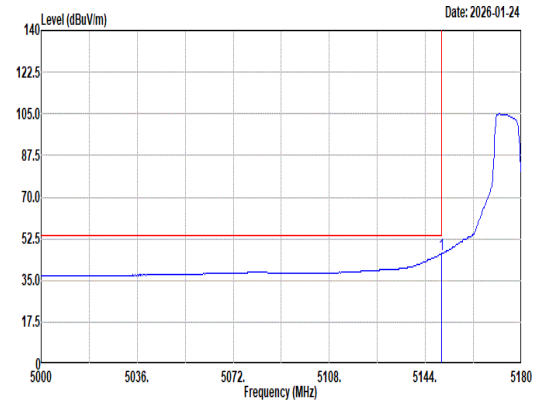 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.94 46.17 54.00 -7.83 39.14 32.70 12.20 37.87 0.00 100 97 Average	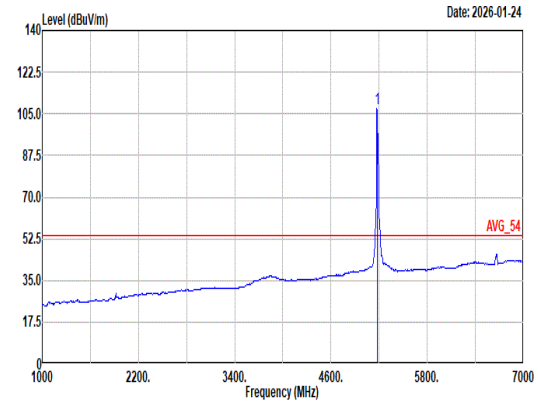 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5180.00 107.06 ------ ------ 100.07 32.66 12.22 37.89 0.00 100 97 Average

Mode	6	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	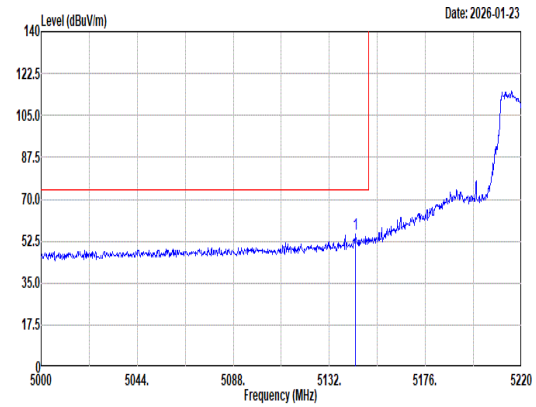 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5143.88 55.45 74.00 -18.55 48.44 32.69 12.19 37.87 0.00 100 344 Peak	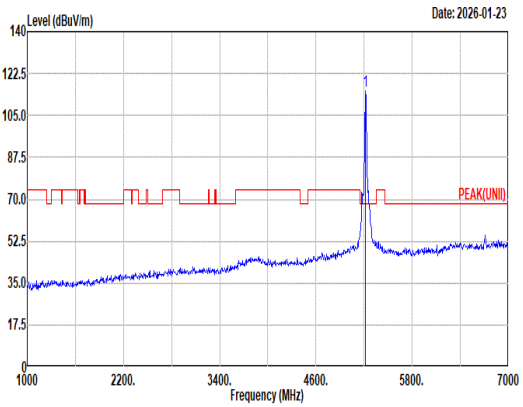 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5220.00 114.91 ------ ------ 107.93 32.58 12.31 37.91 0.00 100 344 Peak
Avg	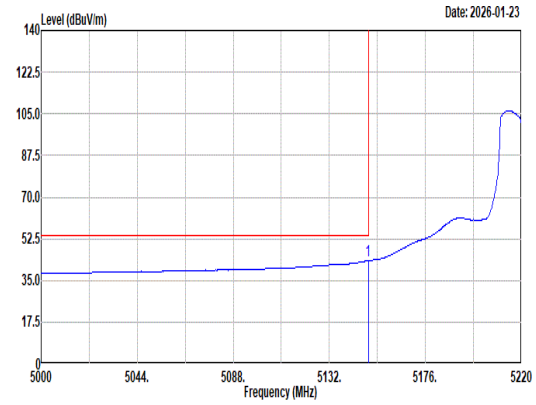 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.82 43.35 54.00 -10.65 36.32 32.70 12.20 37.87 0.00 100 344 Average	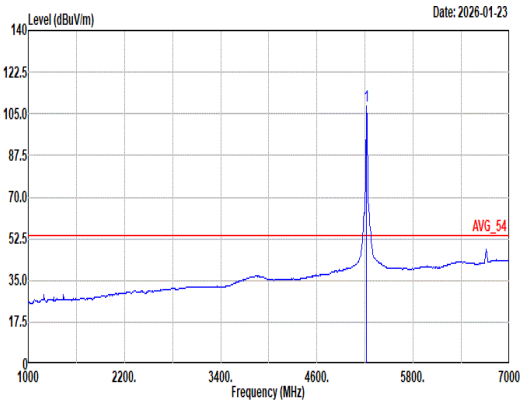 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5220.00 108.11 ------ ------ 101.13 32.58 12.31 37.91 0.00 100 344 Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	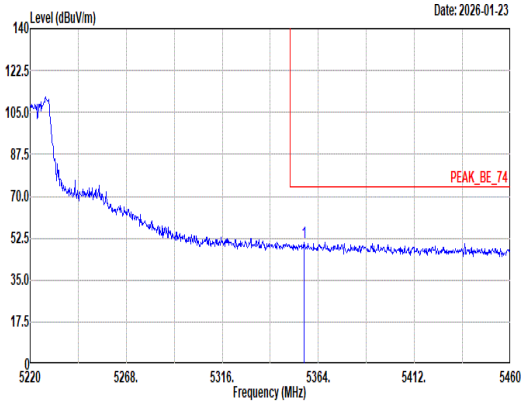 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.80 50.82 74.00 -23.18 43.41 32.39 13.03 38.01 0.00 100 344 Peak	Blank
Avg	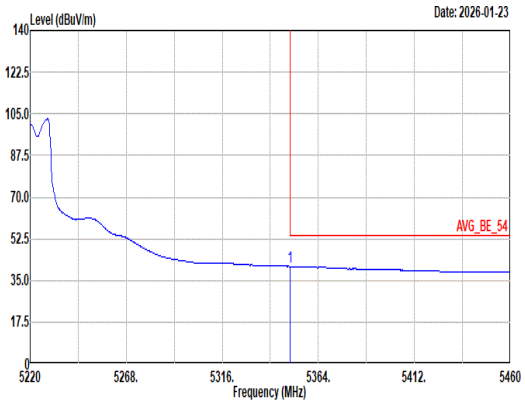 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 40.91 54.00 -13.09 33.52 32.40 13.00 38.01 0.00 100 344 Average	Blank

Mode	6	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	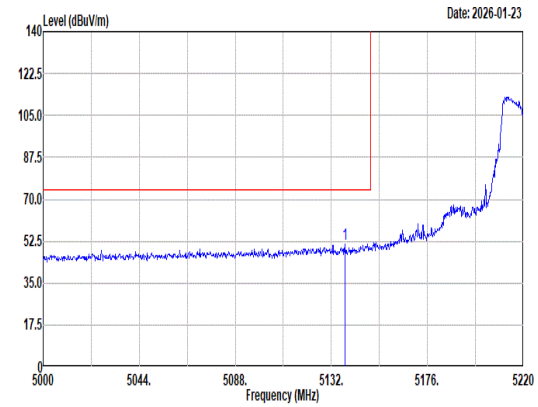 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5138.16 51.16 74.00 -22.84 44.15 32.68 12.19 37.86 0.00 200 24 Peak	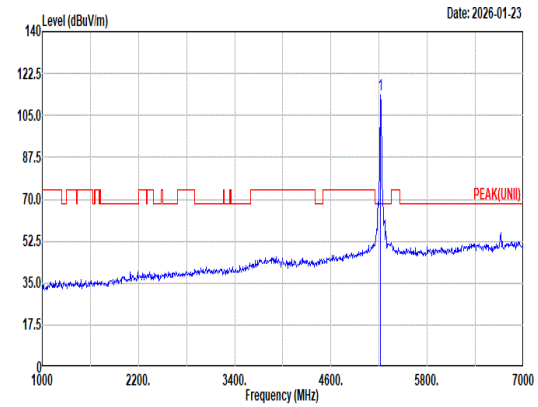 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5220.00 113.66 ------ ------ 106.68 32.58 12.31 37.91 0.00 200 24 Peak
Avg	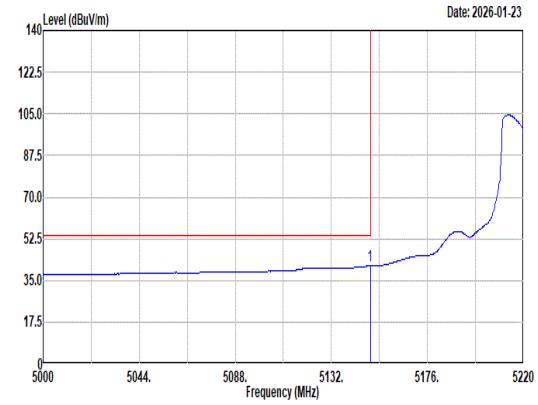 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.82 41.12 54.00 -12.88 34.09 32.70 12.20 37.87 0.00 200 24 Average	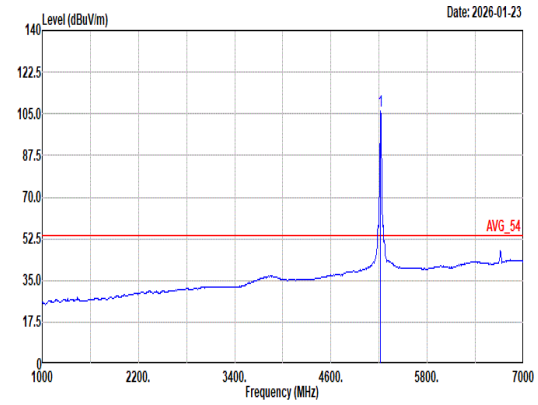 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5220.00 106.35 ------ ------ 99.37 32.58 12.31 37.91 0.00 200 24 Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	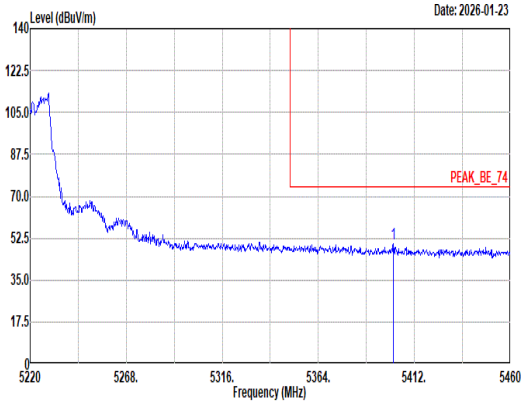 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5401.44 50.45 74.00 -23.55 42.94 32.30 13.25 38.04 0.00 200 24 Peak	Blank
Avg	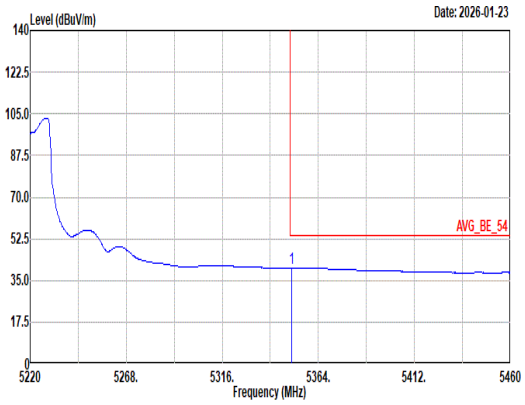 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.56 40.27 54.00 -13.73 32.88 32.40 13.00 38.01 0.00 200 24 Average	Blank

Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	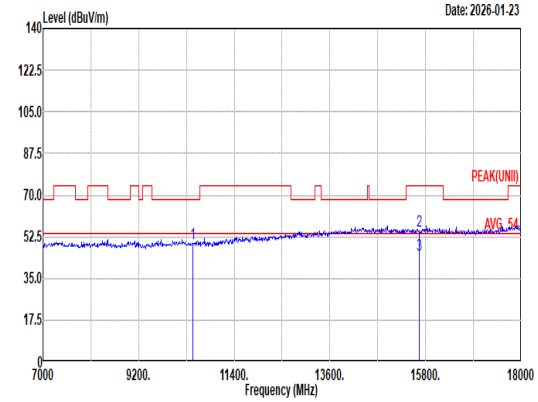 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 49.79 68.20 -18.41 35.21 37.30 18.53 41.81 0.56 -- -- Peak 2 15660.00 54.96 74.00 -19.04 36.13 40.94 22.39 45.15 0.65 -- -- Peak 3 15660.00 45.09 54.00 -8.91 26.26 40.94 22.39 45.15 0.65 -- -- Average	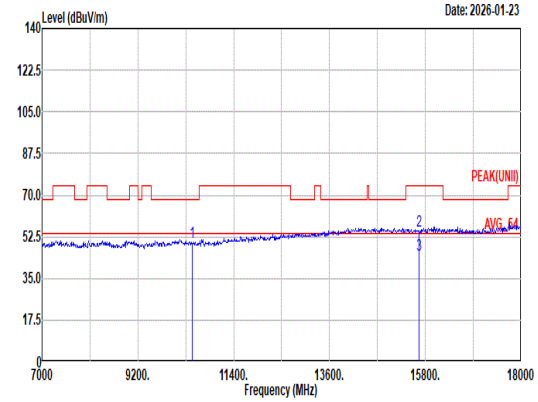 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 50.12 68.20 -18.08 35.54 37.30 18.53 41.81 0.56 -- -- Peak 2 15660.00 55.09 74.00 -18.91 36.26 40.94 22.39 45.15 0.65 -- -- Peak 3 15660.00 45.08 54.00 -8.92 26.25 40.94 22.39 45.15 0.65 -- -- Average

Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	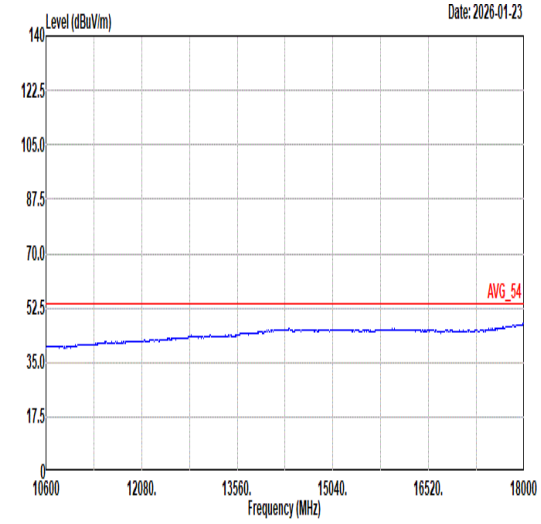 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	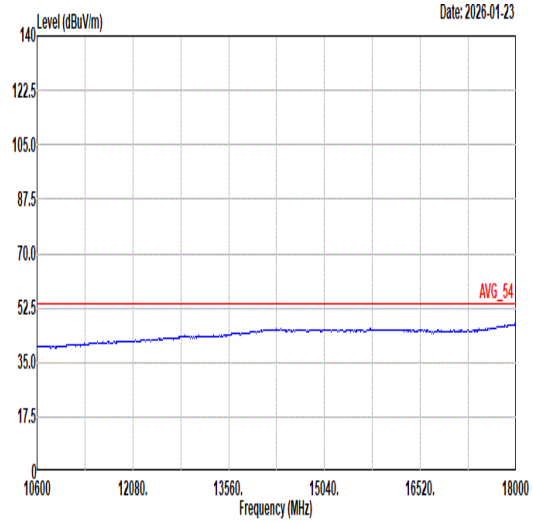 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	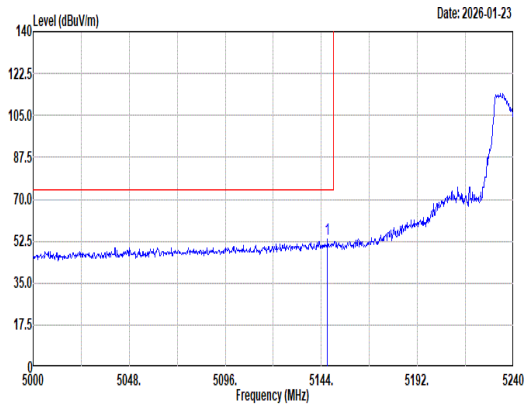 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5147.12 53.42 74.00 -20.58 46.41 32.69 12.19 37.87 0.00 160 341 Peak	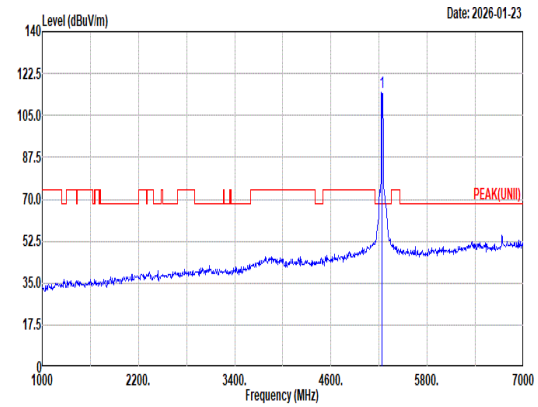 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5240.00 114.73 ------ ------ 107.72 32.54 12.40 37.93 0.00 160 341 Peak
Avg	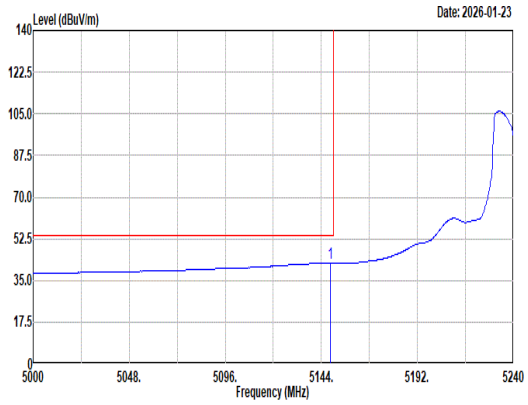 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.56 42.39 54.00 -11.61 35.36 32.70 12.20 37.87 0.00 160 341 Average	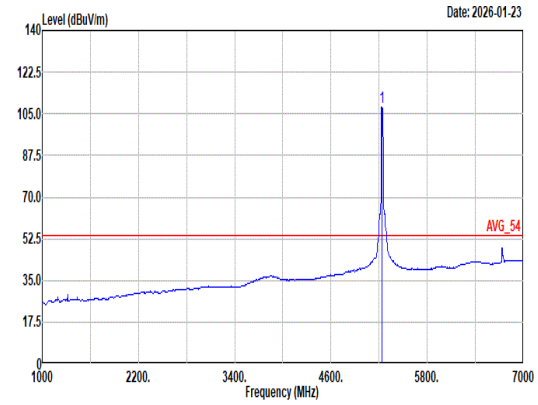 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5240.00 107.81 ------ ------ 100.80 32.54 12.40 37.93 0.00 160 341 Average

Mode	7	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	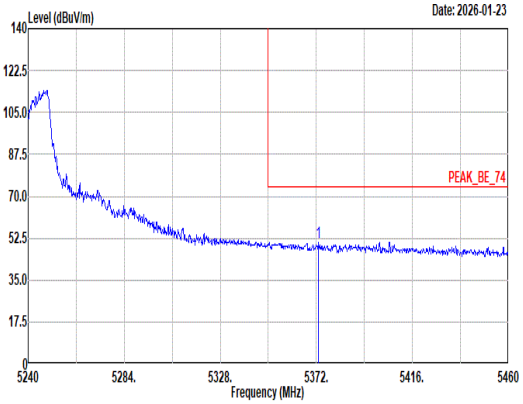 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5373.10 50.83 74.00 -23.17 43.38 32.35 13.12 38.02 0.00 160 341 Peak	Blank
Avg	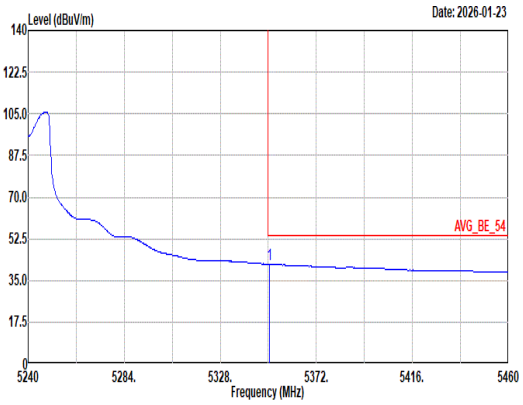 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.66 41.85 54.00 -12.15 34.46 32.40 13.00 38.01 0.00 160 341 Average	Blank

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	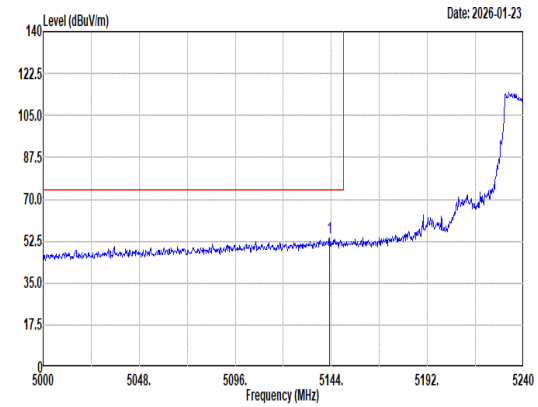 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5143.04 53.98 74.00 -20.02 46.97 32.69 12.19 37.87 0.00 159 19 Peak	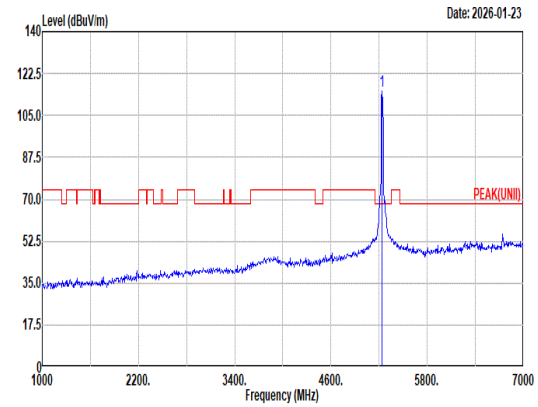 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5240.00 115.14 ------ ------ 108.11 32.53 12.43 37.93 0.00 159 19 Peak
Avg	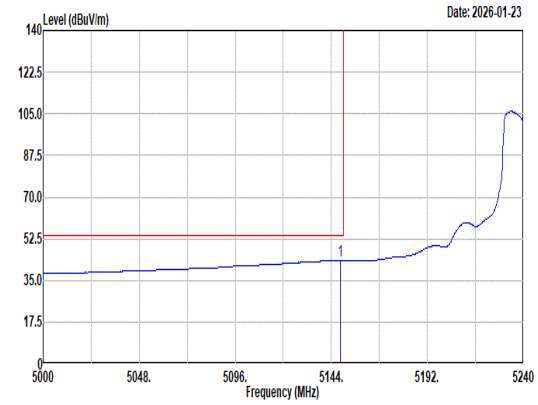 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.56 43.45 54.00 -10.55 36.42 32.70 12.20 37.87 0.00 159 19 Average	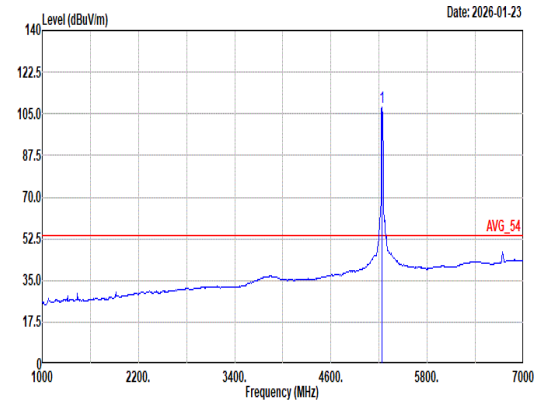 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5240.00 107.74 ------ ------ 100.71 32.53 12.43 37.93 0.00 159 19 Average

Mode	7	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	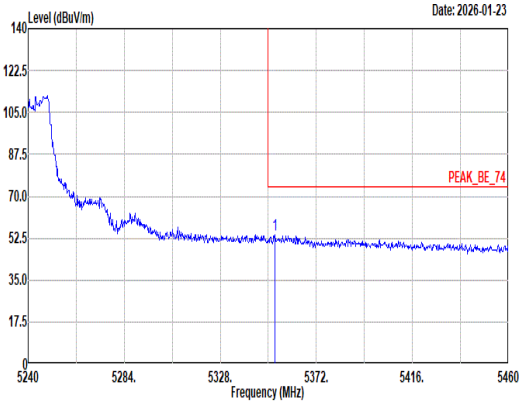 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.08 54.03 74.00 -19.97 46.63 32.39 13.02 38.01 0.00 159 19 Peak	Blank
Avg	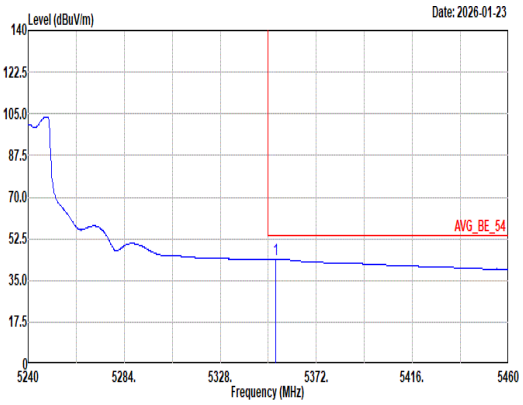 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.30 43.98 54.00 -10.02 36.58 32.39 13.02 38.01 0.00 159 19 Average	Blank

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	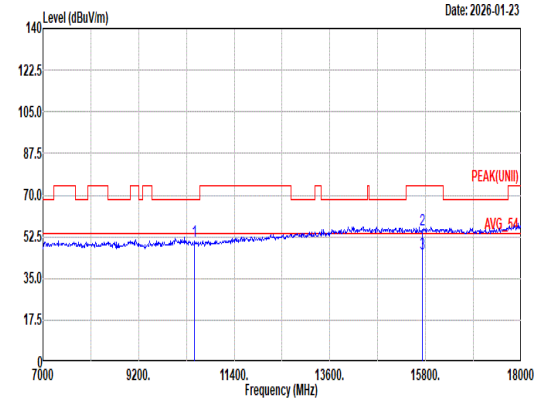 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 50.70 68.20 -17.50 36.10 37.36 18.53 41.85 0.56 -- -- Peak 2 15720.00 55.34 74.00 -18.66 36.13 41.22 22.44 45.10 0.65 -- -- Peak 3 15720.00 45.44 54.00 -8.56 26.23 41.22 22.44 45.10 0.65 -- -- Average	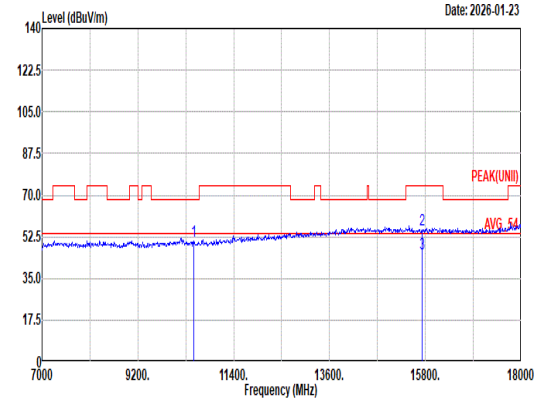 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 50.71 68.20 -17.49 36.11 37.36 18.53 41.85 0.56 -- -- Peak 2 15720.00 55.70 74.00 -18.30 36.49 41.22 22.44 45.10 0.65 -- -- Peak 3 15720.00 45.45 54.00 -8.55 26.24 41.22 22.44 45.10 0.65 -- -- Average

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	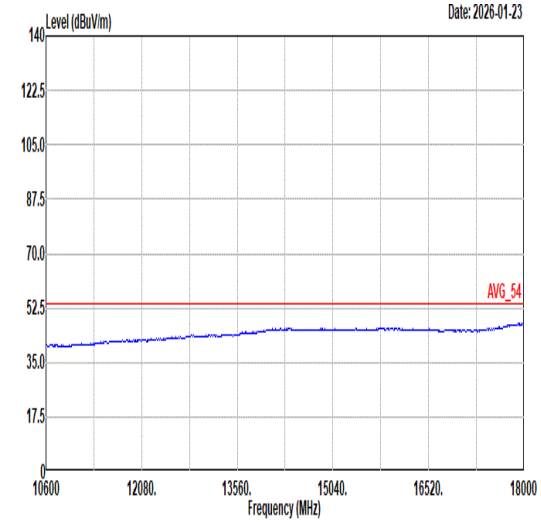 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	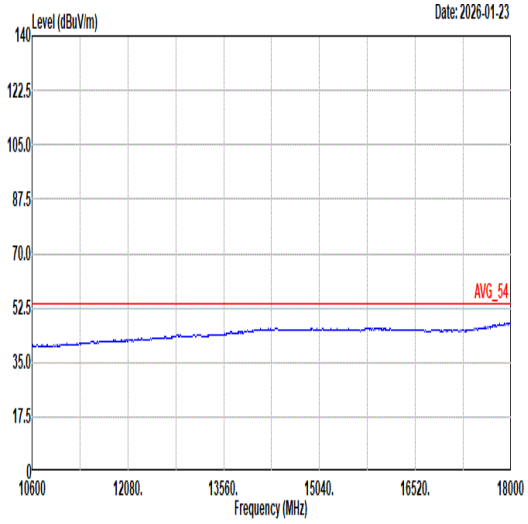 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	8	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	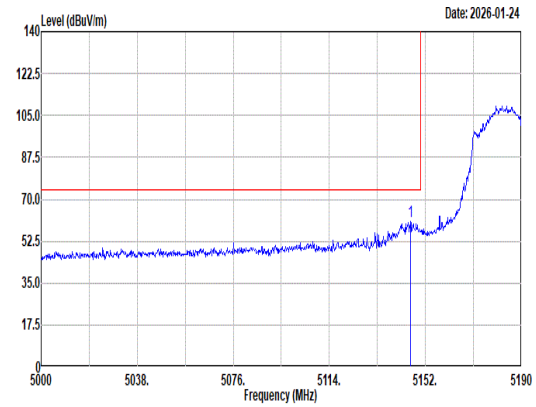 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5146.11 60.93 74.00 -13.07 53.92 32.69 12.19 37.87 0.00 100 342 Peak	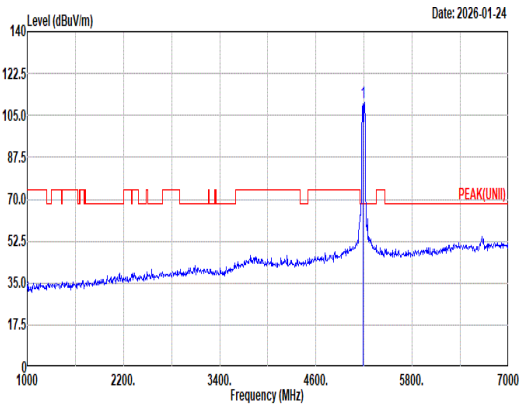 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 110.37 ------ ------ 103.41 32.59 12.28 37.91 0.00 100 342 Peak
Avg	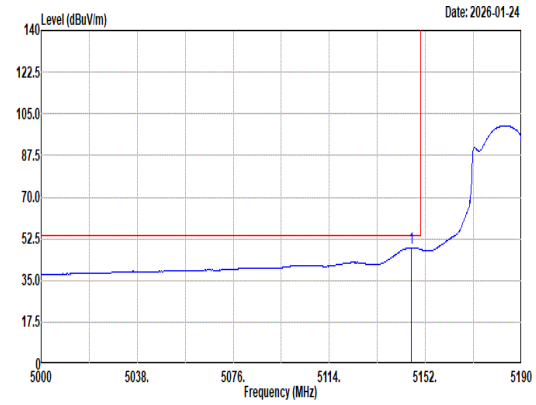 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5146.49 48.84 54.00 -5.16 41.83 32.69 12.19 37.87 0.00 100 342 Average	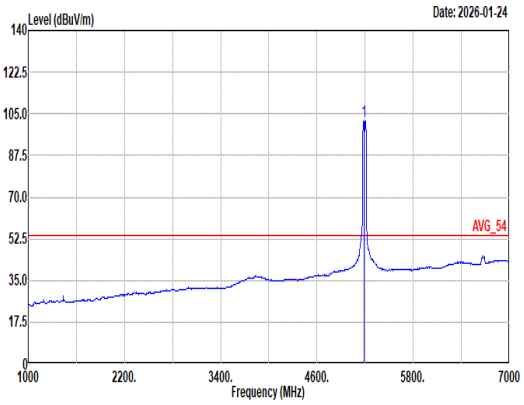 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 101.96 ------ ------ 94.98 32.64 12.23 37.89 0.00 100 342 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	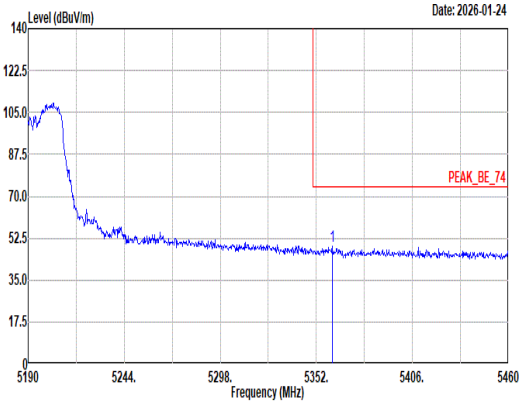 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.91 49.17 74.00 -24.83 41.76 32.38 13.05 38.02 0.00 100 342 Peak	Blank
Avg	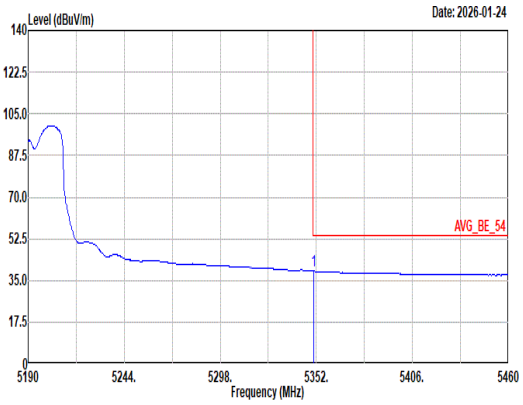 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.38 38.86 54.00 -15.14 31.47 32.40 13.00 38.01 0.00 100 342 Average	Blank

Mode	8	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	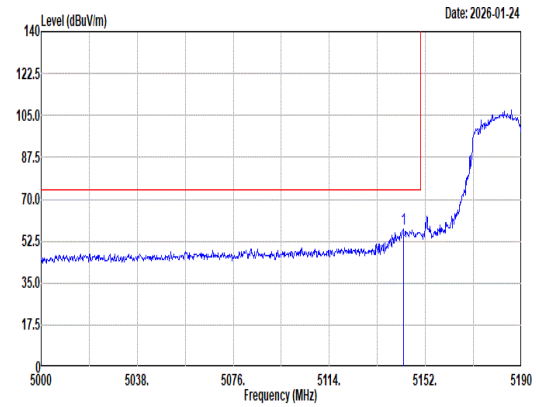 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5143.26 57.37 74.00 -16.63 50.36 32.69 12.19 37.87 0.00 100 92 Peak	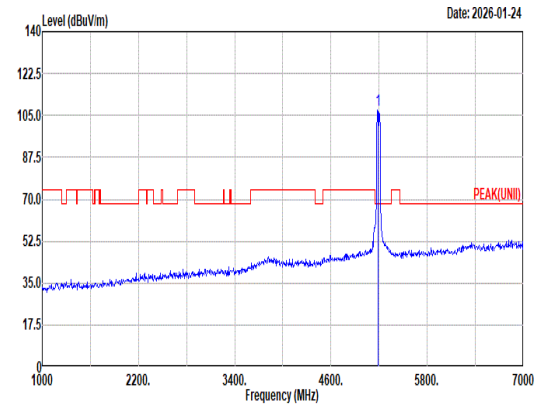 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 107.34 ------ ------ 100.36 32.64 12.23 37.89 0.00 100 92 Peak
Avg	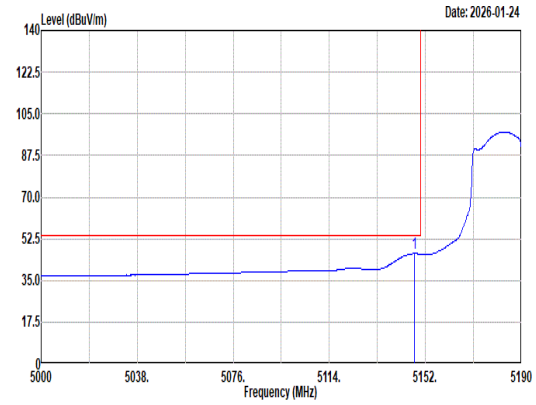 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5147.63 46.35 54.00 -7.65 39.32 32.70 12.20 37.87 0.00 100 92 Average	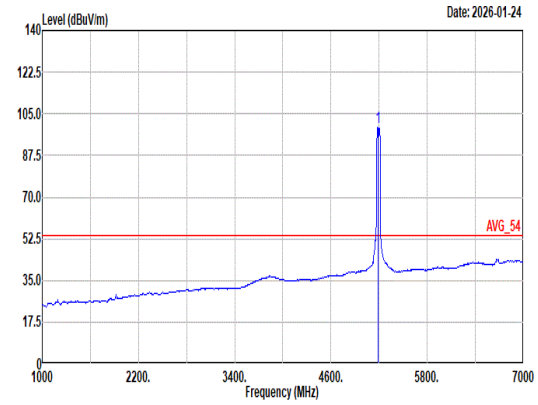 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 99.17 ------ ------ 92.23 32.60 12.25 37.91 0.00 100 92 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	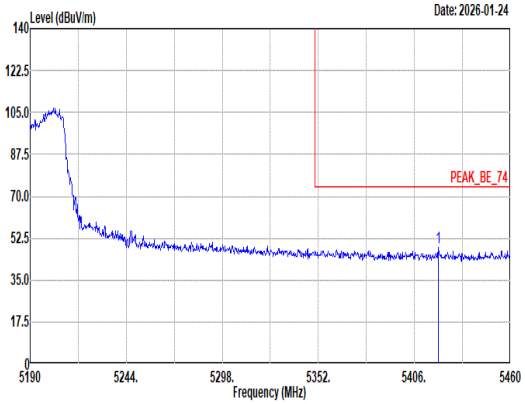 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5419.50 48.62 74.00 -25.38 41.08 32.34 13.26 38.06 0.00 100 92 Peak	Blank
Avg	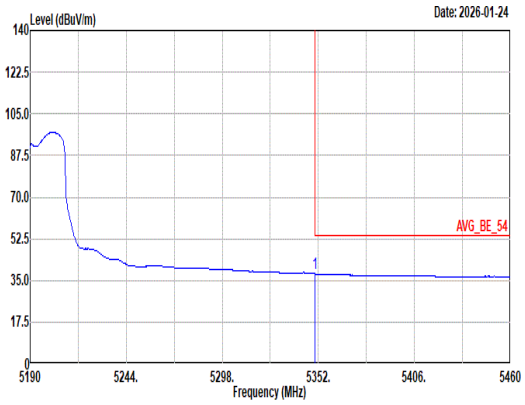 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.11 37.78 54.00 -16.22 30.39 32.40 13.00 38.01 0.00 100 92 Average	Blank

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	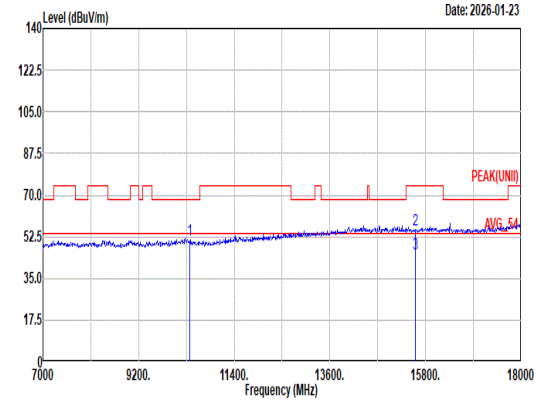 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 51.34 68.20 -16.86 36.61 37.38 18.54 41.75 0.56 -- -- Peak 2 15570.00 55.34 74.00 -18.66 36.53 41.06 22.32 45.22 0.65 -- -- Peak 3 15570.00 45.19 54.00 -8.81 26.38 41.06 22.32 45.22 0.65 -- -- Average	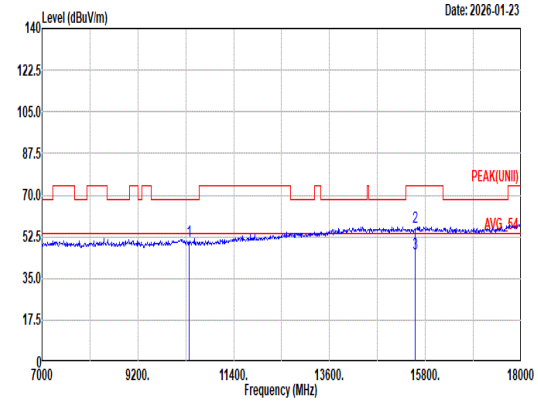 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 50.78 68.20 -17.42 36.05 37.38 18.54 41.75 0.56 -- -- Peak 2 15570.00 56.30 74.00 -17.70 37.49 41.06 22.32 45.22 0.65 -- -- Peak 3 15570.00 45.22 54.00 -8.78 26.41 41.06 22.32 45.22 0.65 -- -- Average

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	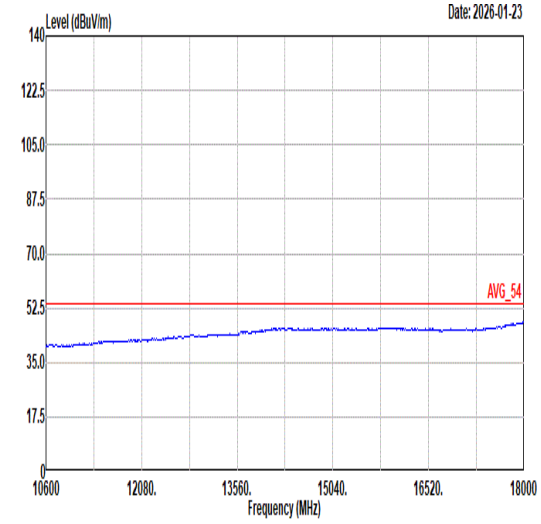 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	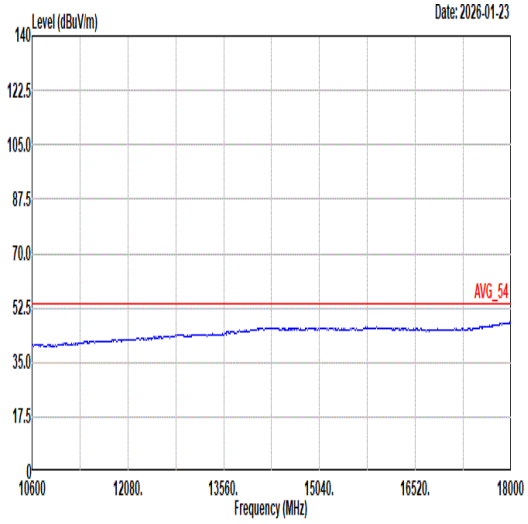 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL

Mode	9	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Partial_242/61RU _5190MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	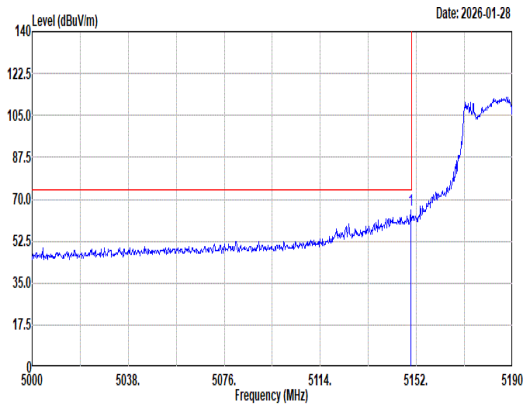 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5149.72 65.57 74.00 -8.43 58.54 32.70 12.20 37.87 0.00 254 356 Peak	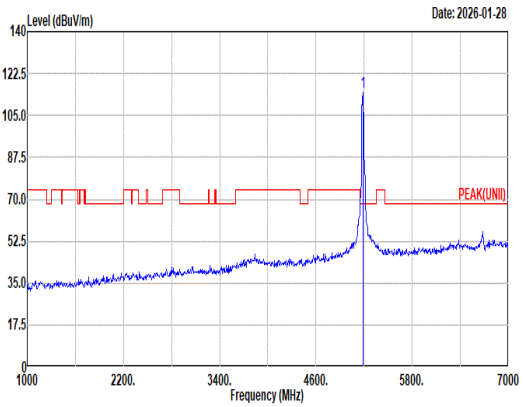 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 114.58 ------ ------ 107.62 32.62 12.24 37.90 0.00 254 356 Peak
Avg	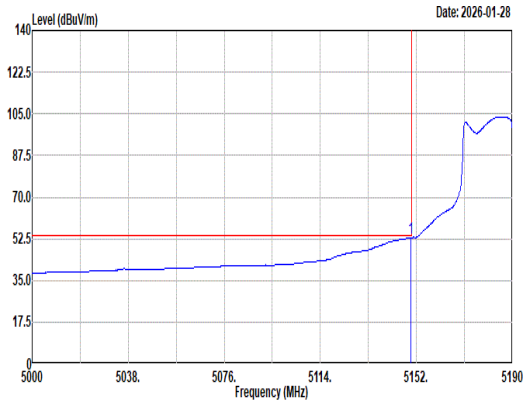 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.91 52.86 54.00 -1.14 45.83 32.70 12.20 37.87 0.00 254 356 Average	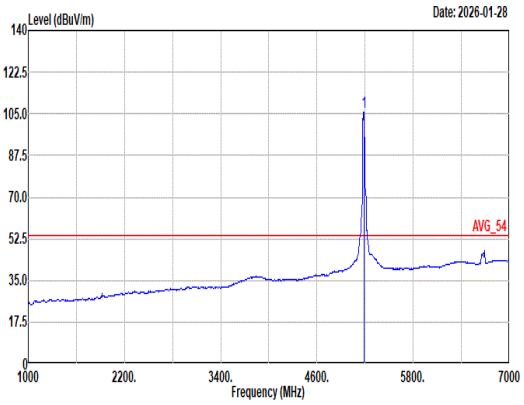 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 105.66 ------ ------ 98.70 32.62 12.24 37.90 0.00 254 356 Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Partial_242/61RU _5190MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	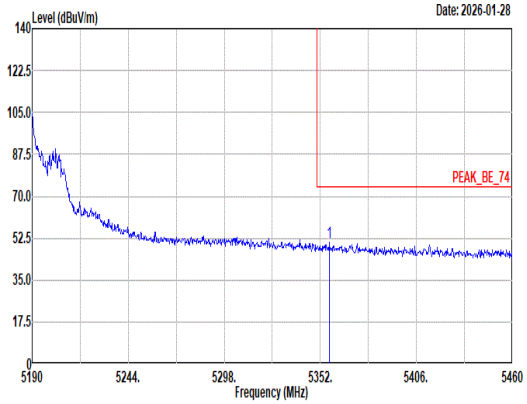 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.13 50.49 74.00 -23.51 43.07 32.39 13.04 38.01 0.00 254 356 Peak	Blank
Avg	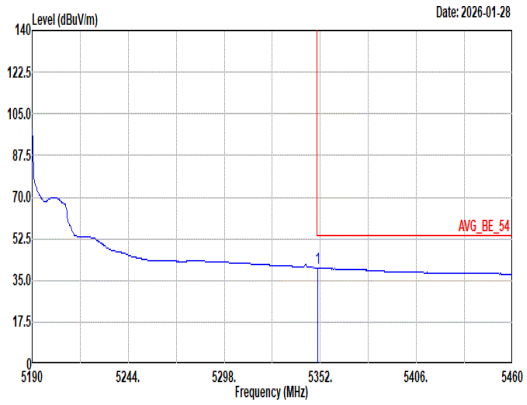 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.65 40.31 54.00 -13.69 32.92 32.40 13.00 38.01 0.00 254 356 Average	Blank

Mode	9	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Partial_242/61RU _5190MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	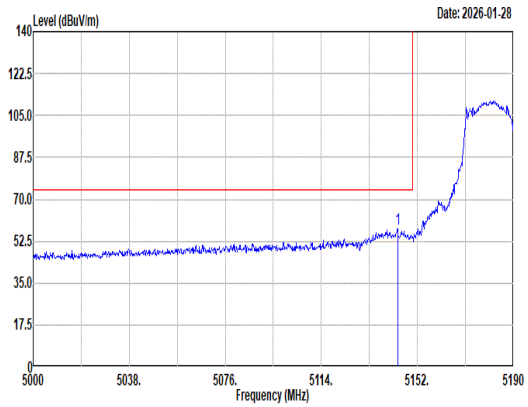 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5144.21 57.75 74.00 -16.25 50.74 32.69 12.19 37.87 0.00 107 339 Peak	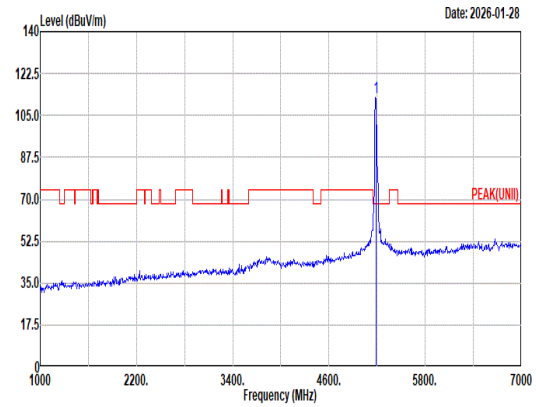 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 112.55 ------ ------ 105.57 32.64 12.23 37.89 0.00 107 339 Peak
Avg	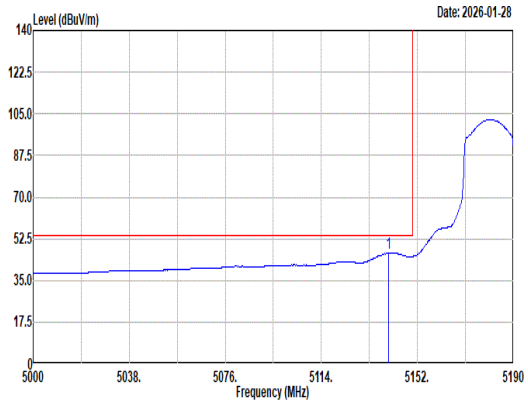 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5140.60 46.65 54.00 -7.35 39.65 32.68 12.19 37.87 0.00 107 339 Average	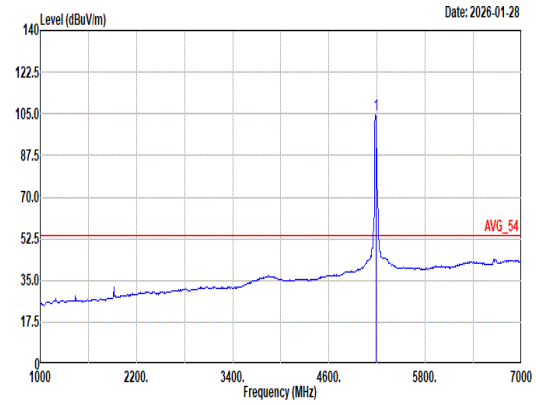 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 104.48 ------ ------ 97.50 32.64 12.23 37.89 0.00 107 339 Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Partial_242/61RU _5190MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	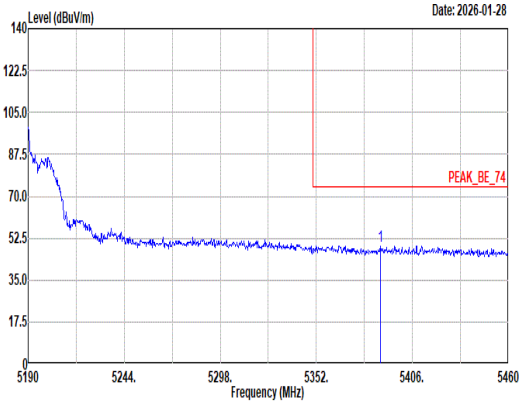 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5388.18 49.34 74.00 -24.66 41.86 32.32 13.19 38.03 0.00 107 339 Peak	Blank
Avg	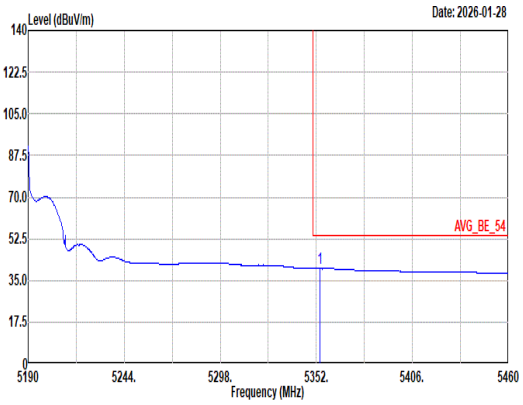 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.89 40.02 54.00 -13.98 32.62 32.39 13.02 38.01 0.00 107 339 Average	Blank

Mode	10	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	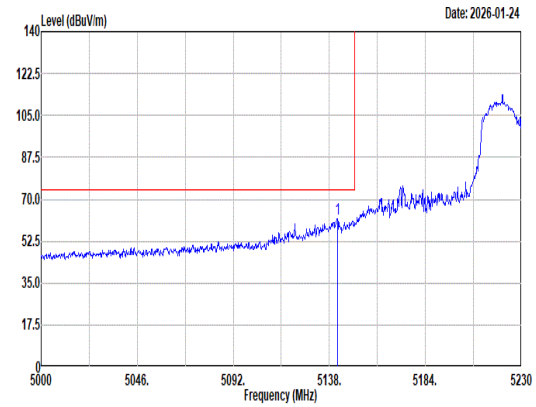 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.91 61.77 74.00 -12.23 54.77 32.68 12.19 37.87 0.00 200 339 Peak	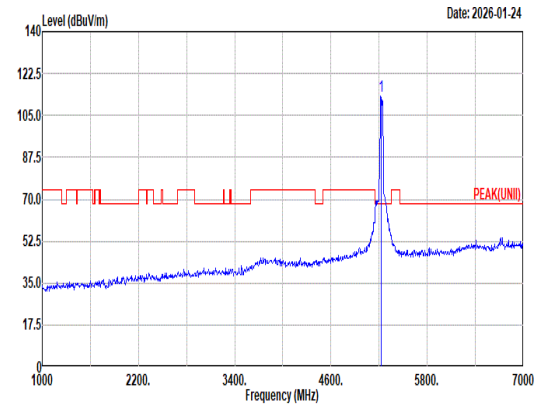 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 113.13 ------ ------ 106.15 32.56 12.34 37.92 0.00 200 339 Peak
Avg	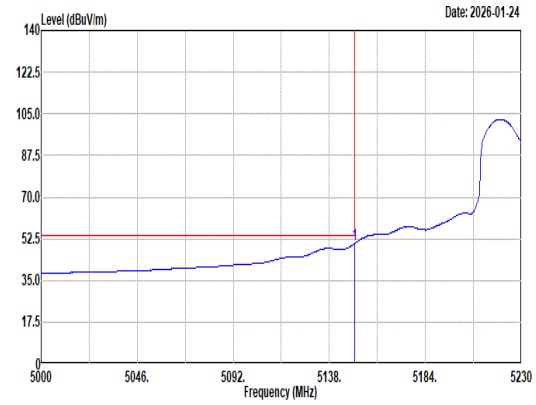 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.96 50.45 54.00 -3.55 43.42 32.70 12.20 37.87 0.00 200 339 Average	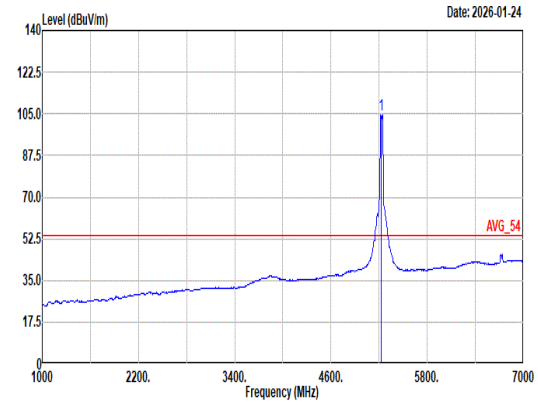 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 104.58 ------ ------ 97.60 32.56 12.34 37.92 0.00 200 339 Average

Mode	10	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	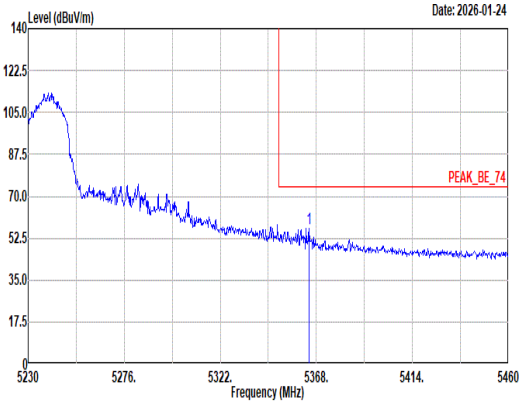 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5364.55 56.51 74.00 -17.49 49.09 32.37 13.07 38.02 0.00 200 339 Peak	Blank
Avg	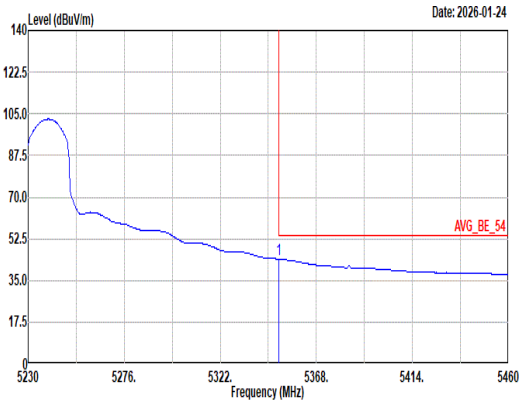 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.06 43.97 54.00 -10.03 36.58 32.40 13.00 38.01 0.00 200 339 Average	Blank

Mode	10	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	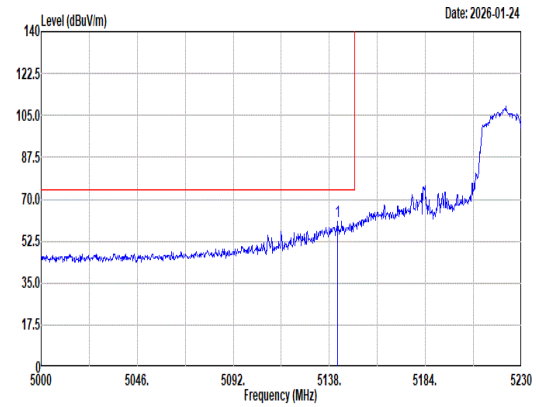 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5141.91 60.90 74.00 -13.10 53.90 32.68 12.19 37.87 0.00 100 94 Peak	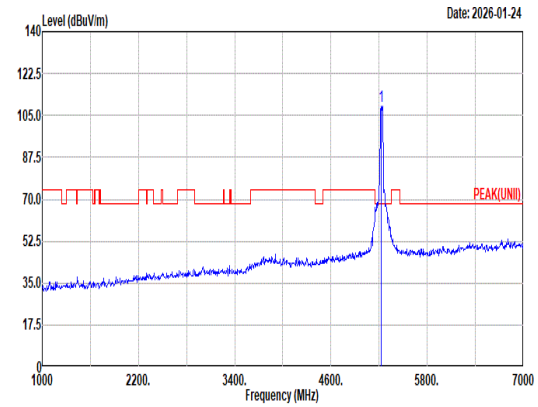 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5230.00 108.69 ------ ------ 101.69 32.55 12.37 37.92 0.00 100 94 Peak
Avg	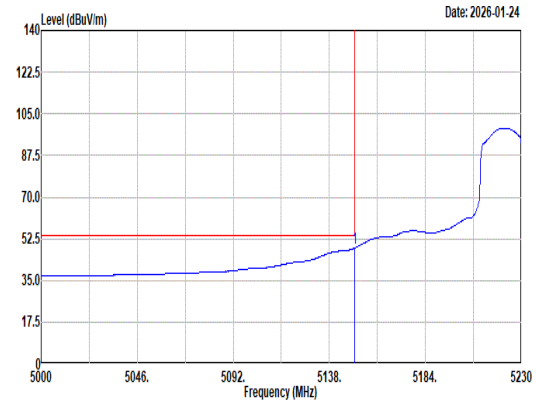 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.96 48.53 54.00 -5.47 41.50 32.70 12.20 37.87 0.00 100 94 Average	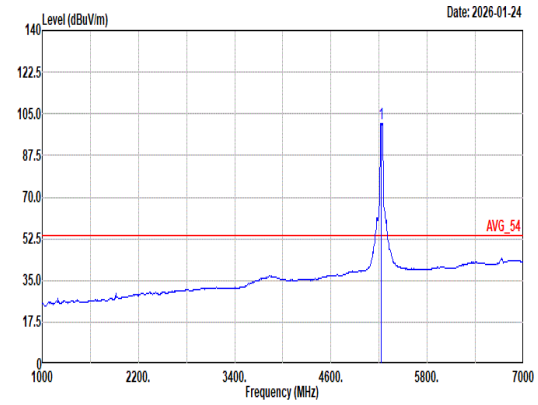 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5230.00 101.15 ------ ------ 94.10 32.52 12.46 37.93 0.00 100 94 Average

Mode	10	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	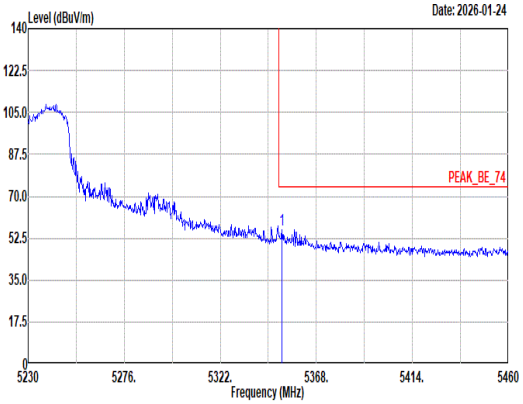 Site : 03CH17-HY Condition: PEAK_BE_74 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.67 56.21 74.00 -17.79 48.81 32.40 13.01 38.01 0.00 100 94 Peak	Blank
Avg	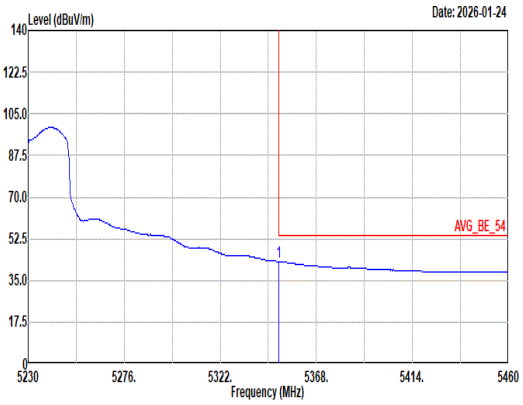 Site : 03CH17-HY Condition: AVG_BE_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.06 42.98 54.00 -11.02 35.59 32.40 13.00 38.01 0.00 100 94 Average	Blank

Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	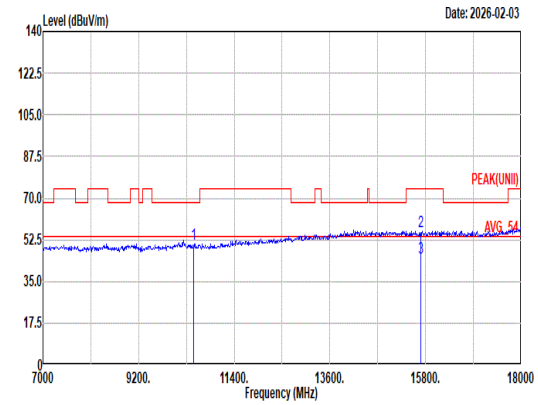 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 50.85 68.20 -17.35 36.27 37.32 18.53 41.83 0.56 -- -- Peak 2 15690.00 56.02 74.00 -17.98 37.02 41.06 22.42 45.13 0.65 -- -- Peak 3 15690.00 45.11 54.00 -8.89 26.11 41.06 22.42 45.13 0.65 -- -- Average	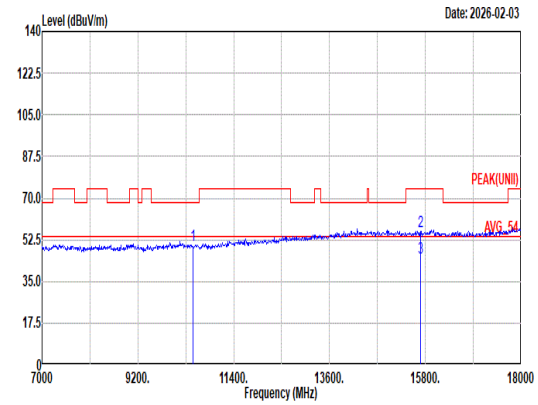 Site : 03CH17-HY Condition: PEAK(UNII) 3m DRH18-E_KV2D06A18ES_251105 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 50.17 68.20 -18.03 35.59 37.32 18.53 41.83 0.56 -- -- Peak 2 15690.00 56.23 74.00 -17.77 37.23 41.06 22.42 45.13 0.65 -- -- Peak 3 15690.00 45.08 54.00 -8.92 26.08 41.06 22.42 45.13 0.65 -- -- Average

Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	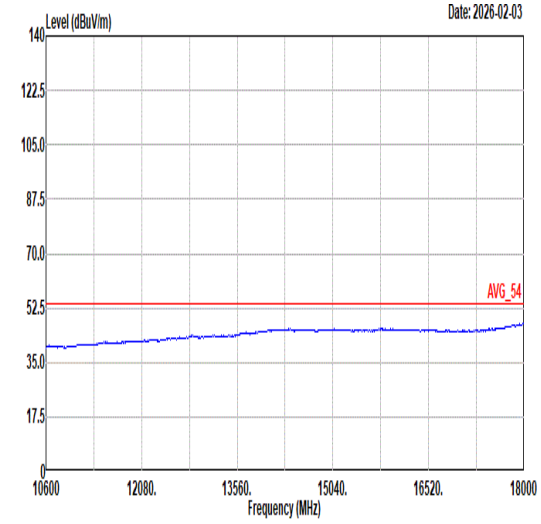 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 HORIZONTAL	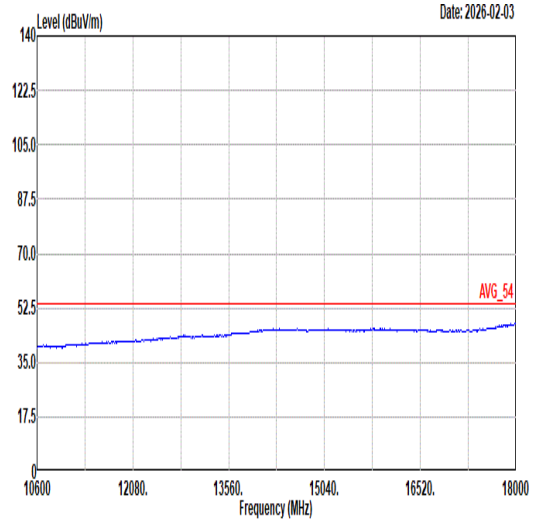 Site : 03CH17-HY Condition: AVG_54 3m DRH18-E_KV2D06A18ES_251105 VERTICAL