





FR1 n77 / 60MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

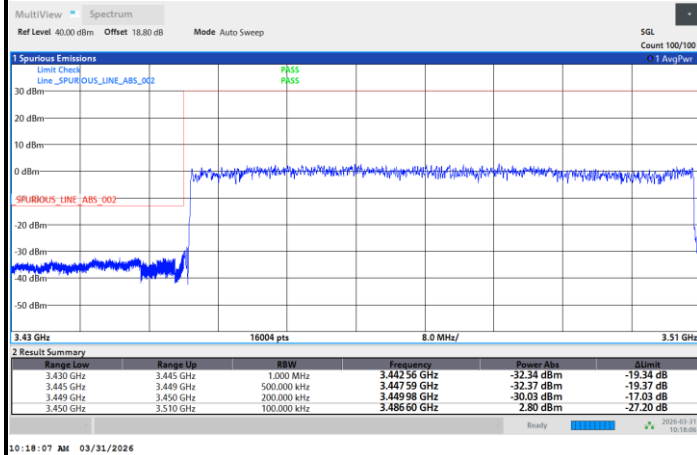


Highest Band Edge / Full RB

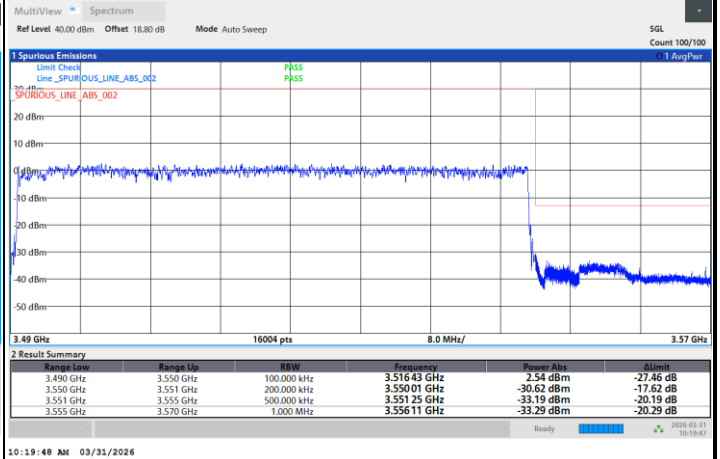


FR1 n77 / 60MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

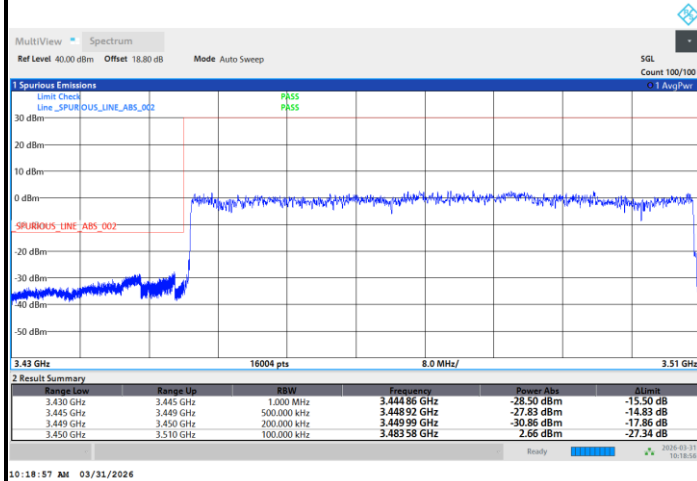


Highest Band Edge / Full RB

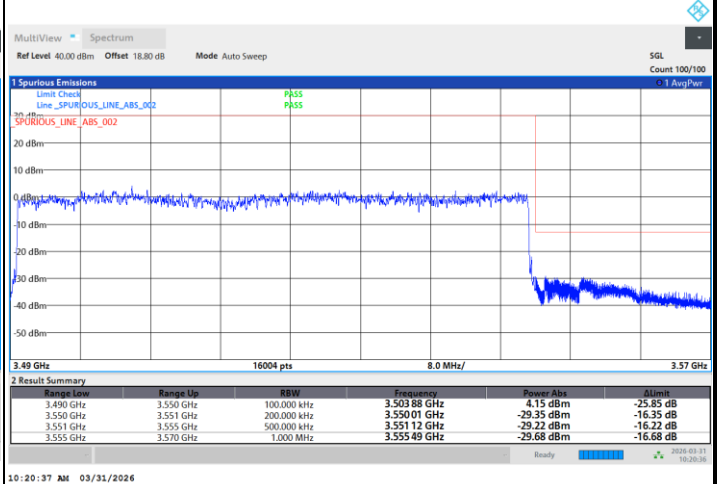




FR1 n77 / 70MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

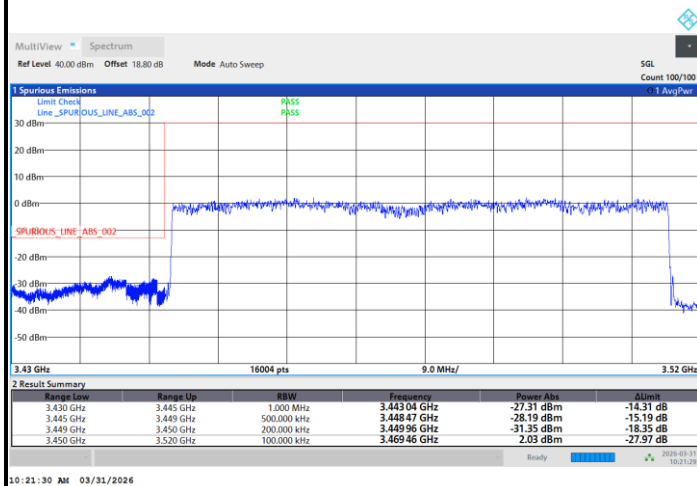


Highest Band Edge / Full RB

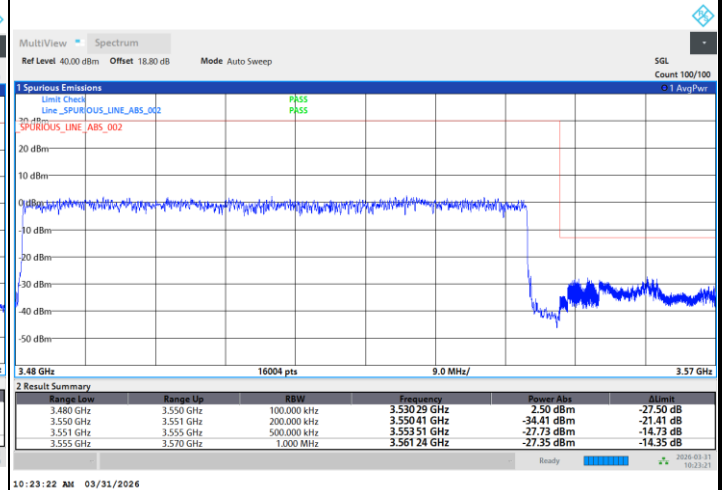


FR1 n77 / 70MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

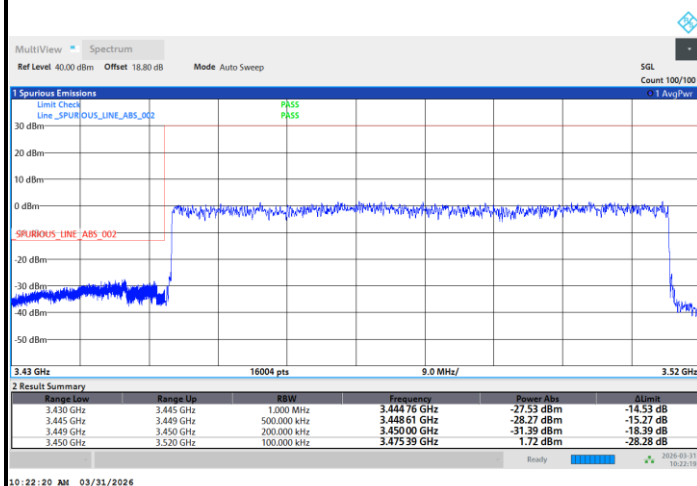


Highest Band Edge / Full RB

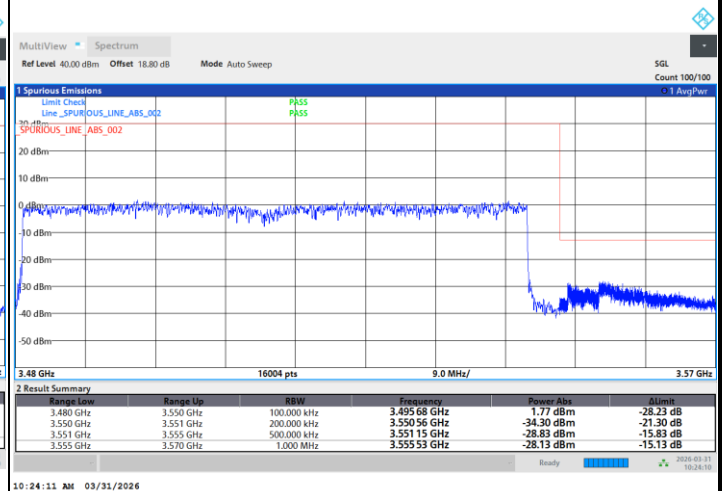




FR1 n77 / 80MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

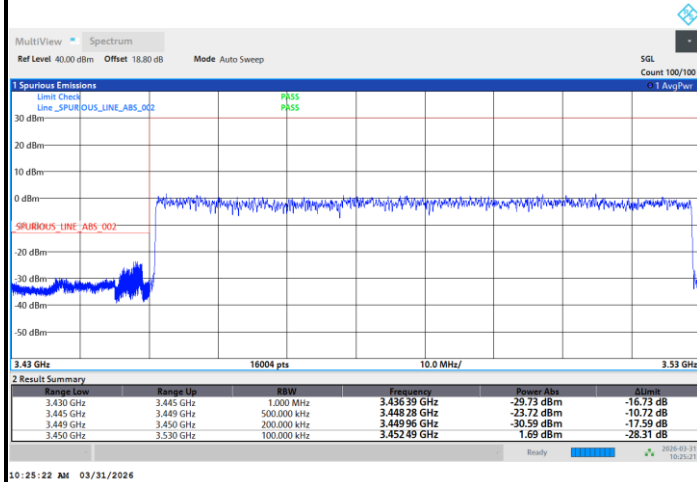


Highest Band Edge / Full RB

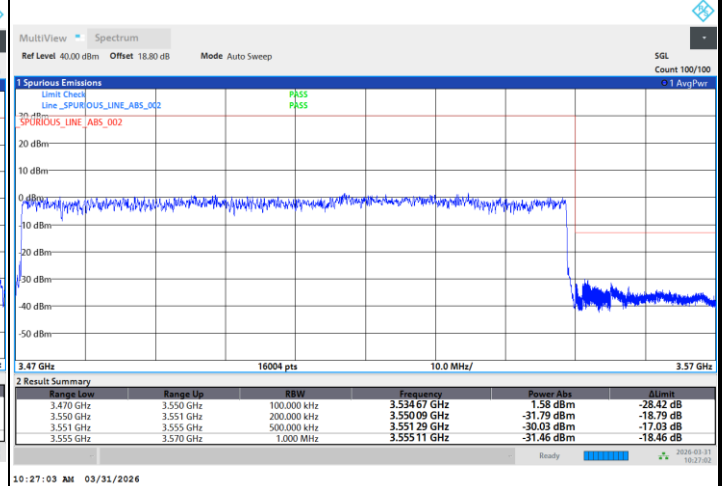


FR1 n77 / 80MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

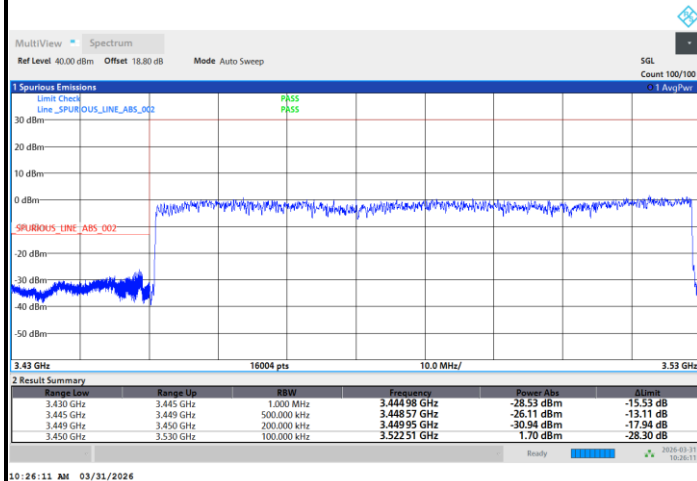


Highest Band Edge / Full RB

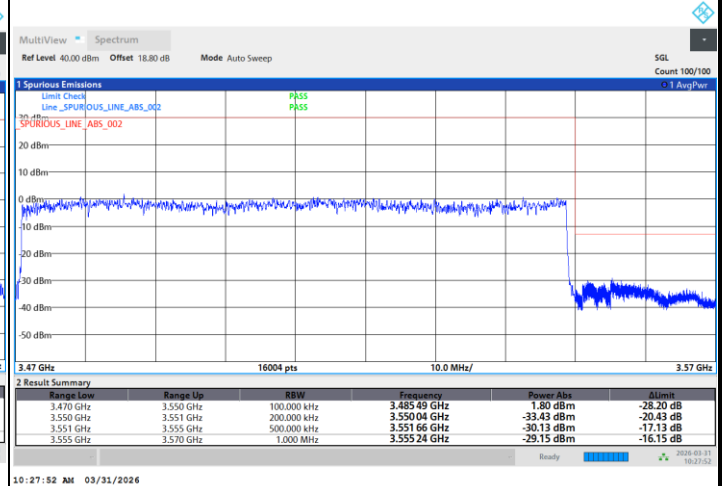




FR1 n77 / 90MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

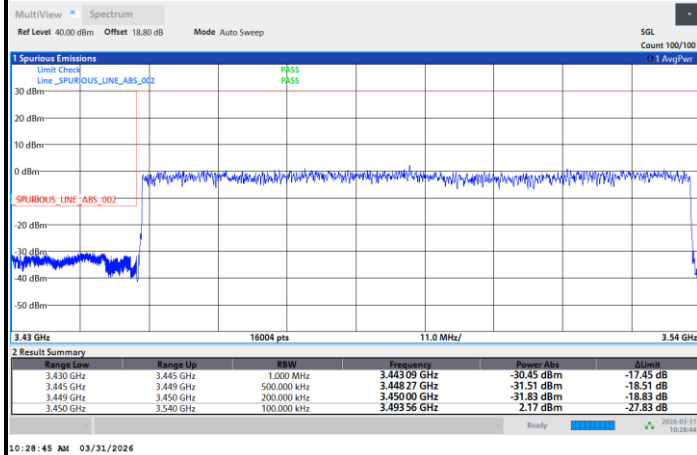


Highest Band Edge / Full RB

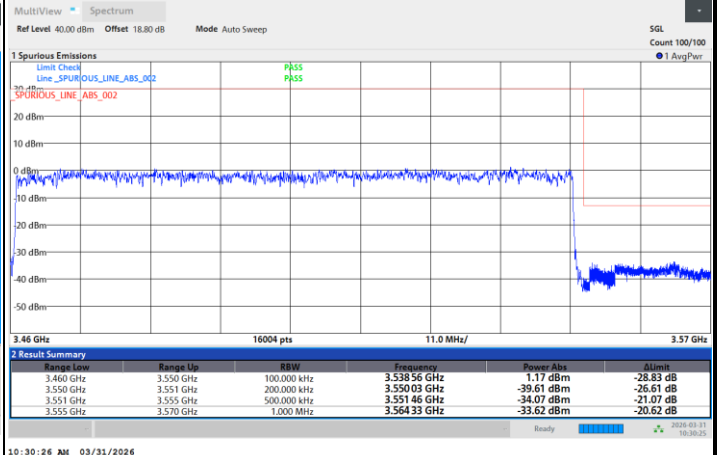


FR1 n77 / 90MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

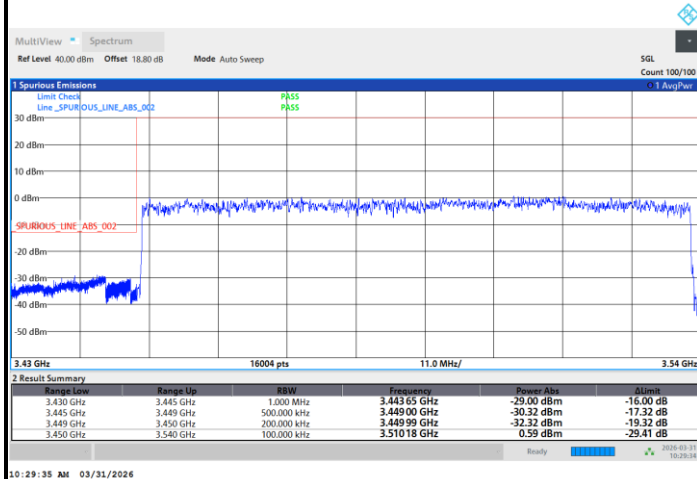

Highest Band Edge / Full RB

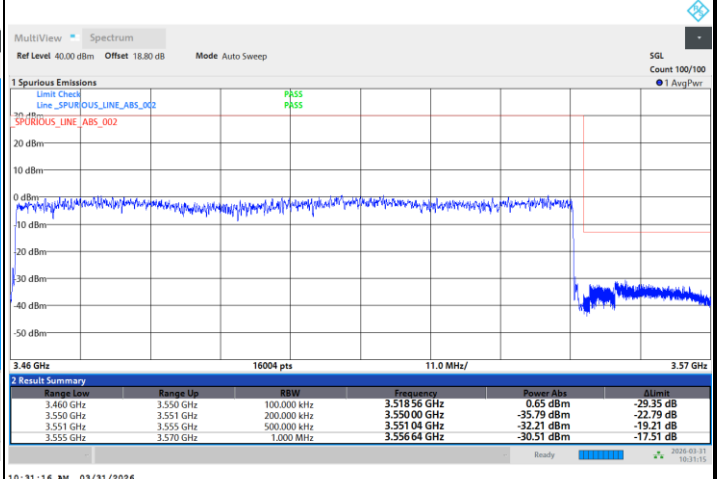




FR1 n77 / 100MHz / DFT-S OFDM

Middle Band Edge / Full RB / PI/2 BPSK

Middle Band Edge / Full RB / QPSK

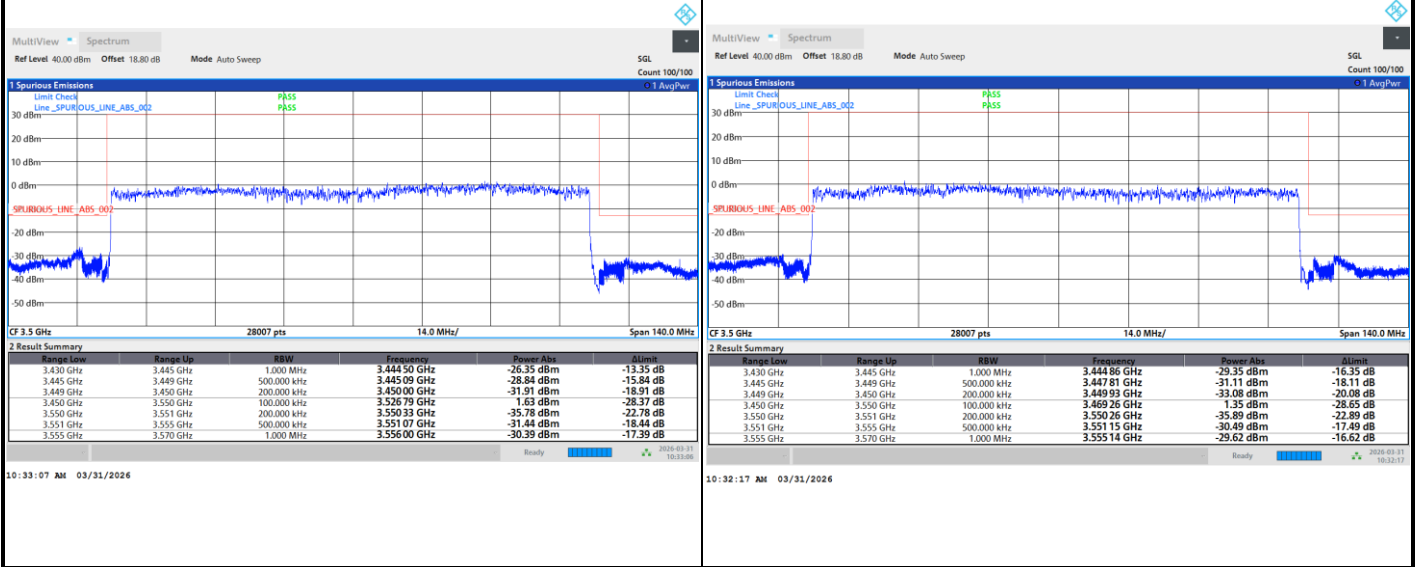





Conducted Spurious Emission

FR1 n77 / 10MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

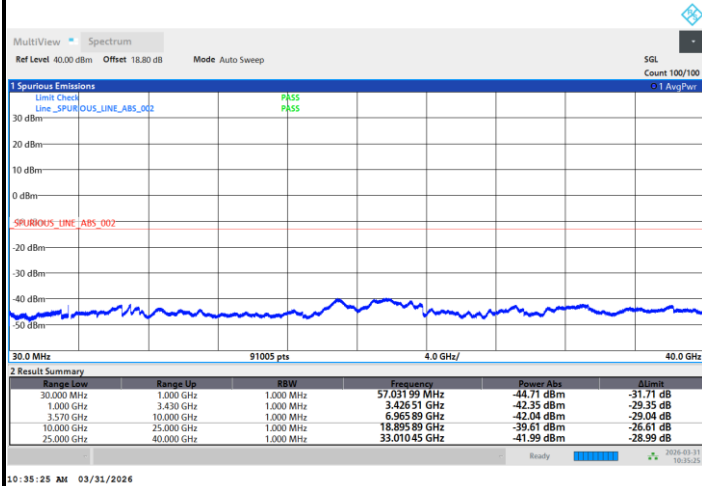

Middle Channel

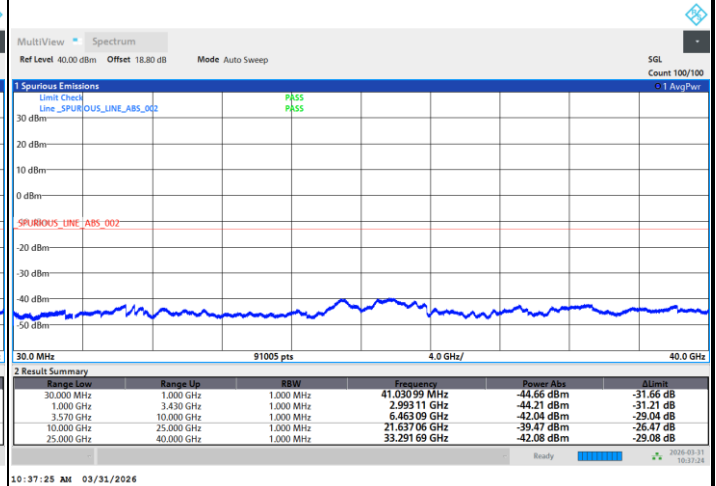

Highest Channel

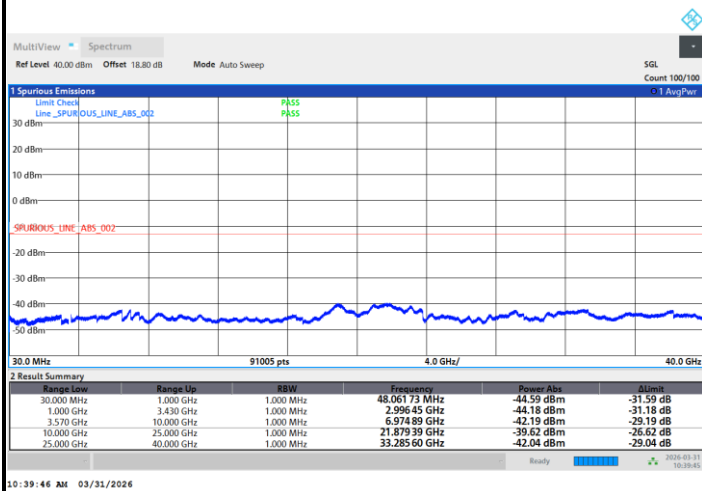

Frequency Stability

Test Conditions		FR1 n77 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0019	-6.5	Yes	PASS
40	Normal Voltage	0.0027	-9.3	Yes	
30	Normal Voltage	0.0008	2.9	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0008	2.7	Yes	
0	Normal Voltage	0.0018	6.4	Yes	
-10	Normal Voltage	0.0019	-6.7	Yes	
-20	Normal Voltage	0.0005	1.9	Yes	
-30	Normal Voltage	0.0027	-9.4	Yes	
20	Maximum Voltage	0.0006	2	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0010	3.4	Yes	

Note:

1. Normal Voltage = 3.91 V. ; Minimum Voltage = 3.5 V. ; Maximum Voltage = 4.45 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung	Temperature :	21.1 ~ 25.7°C
		Relative Humidity :	55.8 ~ 63.2%

B1.Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	NR SA n5	Part 22H	L	2476	-63.58	RMS	26.60	-24.21	0.91	-95.23	28.35	-13.00	-50.58	H	8
2	NR SA n26	Part 22H	H	2491	-63.44	RMS	26.80	-24.20	0.91	-95.23	28.28	-13.00	-50.44	H	8
3	EN-DC B2+n5	Part 22H	H	2491	-58.72	RMS	26.80	-24.20	0.91	-95.23	33.00	-13.00	-45.72	H	2+8
1	NR SA n25	Part 24E	H	5660	-49.25	RMS	33.16	-21.84	1.55	-95.23	33.11	-13.00	-36.25	V	1
2	EN-DC B5+n2	Part 24E	H	5674	-51.70	RMS	33.24	-21.84	1.56	-95.23	30.57	-13.00	-38.70	V	8+2
3	EN-DC B5+n25	Part 24E	H	5660	-50.50	RMS	33.16	-21.84	1.55	-95.23	31.86	-13.00	-37.50	H	8+2
1	NR SA n66	Part 27L	H	5241	-51.50	RMS	32.42	-21.73	1.92	-95.23	31.12	-13.00	-38.50	H	5
2	EN-DC B5+n66	Part 27L	H	5241	-48.32	RMS	32.42	-21.73	1.92	-95.23	34.30	-13.00	-35.32	V	8+2
3	NR SA n30	Part 27D	L	6917	-51.09	RMS	36.03	-21.58	1.45	-95.23	28.24	-40.00	-11.09	H	8
4	NR SA n30	Part 27D	M	6917	-54.25	RMS	36.03	-21.58	1.45	-95.23	25.08	-40.00	-14.25	V	8
5	NR SA n40	Part 27D	M	7052	-44.43	RMS	36.10	-21.55	1.41	-95.23	34.84	-40.00	-4.43	V	8
6	NR SA n13	Part 27F	M	1560	-66.62	RMS	24.40	-25.21	1.05	-95.23	28.37	-42.15	-24.47	H	8
7	NR SA n13	Part 27F	M	2333	-57.49	RMS	26.87	-24.40	0.91	-95.23	34.36	-13.00	-44.49	H	8
8	NR SA n12	Part 27H	L	2100	-56.42	RMS	26.30	-24.71	0.85	-95.23	36.38	-13.00	-43.42	H	8
9	EN-DC B2+n12	Part 27H	L	2100	-59.47	RMS	26.30	-24.71	0.85	-95.23	33.33	-13.00	-46.47	H	2+8
10	NR SA n71	Part 27N	M	2022	-58.56	RMS	26.20	-24.81	0.80	-95.23	34.48	-13.00	-45.56	H	8
11	EN-DC B2+n71	Part 27N	M	2022	-59.04	RMS	26.20	-24.81	0.80	-95.23	34.00	-13.00	-46.04	H	2+8
12	NR SA n7	Part 27M	H	5085	-40.03	RMS	32.56	-21.64	2.16	-95.23	42.12	-25.00	-15.03	V	8
13	NR SA n38	Part 27M	L	5143	-44.60	RMS	32.50	-21.68	2.08	-95.23	37.73	-25.00	-19.60	V	8
14	NR SA n41 HPUE	Part 27M	M	7753	-33.57	RMS	36.60	-21.38	1.56	-95.23	44.88	-25.00	-8.57	V	8
15	EN-DC B5+n7	Part 27M	H	7620	-52.74	RMS	36.60	-21.24	1.62	-95.23	25.51	-25.00	-27.74	H	8+1
16	EN-DC B5+n38	Part 27M	L	7714	-47.32	RMS	36.53	-21.34	1.58	-95.23	31.14	-25.00	-22.32	H	8+1
17	EN-DC B5+n41	Part 27M	L	7492	-36.32	RMS	36.72	-21.17	1.53	-95.23	41.83	-25.00	-11.32	V	8+1



18	NR SA n77	Part 27O	H	11827	-33.23	RMS	38.40	-21.86	2.04	-95.23	43.42	-13.00	-20.23	V	8
19	NR SA n78	Part 27O	L	18528	-34.92	RMS	38.10	-39.02	-9.54	-95.23	70.77	-13.00	-21.92	V	8
20	EN-DC B5+n77	Part 27O	L	18528	-39.21	RMS	38.10	-39.02	-9.54	-95.23	66.48	-13.00	-26.21	H	8+9
21	EN-DC B5+n78	Part 27O	H	18814	-37.67	RMS	38.23	-38.86	-9.54	-95.23	67.73	-13.00	-24.67	H	8+9
22	NR SA n77	Part 27O	H	11855	-35.28	RMS	38.41	-21.87	2.04	-95.23	41.37	-13.00	-22.28	H	3+4
23	NR SA n78	Part 27O	H	11287	-36.83	RMS	38.27	-21.74	1.94	-95.23	39.93	-13.00	-23.83	V	3+4
24	NR SA n77	Part 27Q	M	10460	-35.56	RMS	37.22	-21.81	1.79	-95.23	42.47	-13.00	-22.56	V	8
25	NR SA n78	Part 27Q	L	10357	-37.45	RMS	37.37	-21.75	1.77	-95.23	40.39	-13.00	-24.45	V	8
26	EN-DC B5+n77	Part 27Q	H	24666	-44.03	RMS	39.53	-31.44	-9.54	-95.23	52.65	-13.00	-31.03	V	8+9
27	EN-DC B5+n78	Part 27Q	H	24600	-38.29	RMS	39.40	-31.44	-9.54	-95.23	58.52	-13.00	-25.29	H	8+9
28	NR SA n77	Part 27Q	L	10355	-34.18	RMS	37.38	-21.75	1.77	-95.23	43.65	-13.00	-21.18	V	3+4
29	NR SA n78	Part 27Q	L	10357	-34.75	RMS	37.37	-21.75	1.77	-95.23	43.09	-13.00	-21.75	H	3+4
1	NR SA n26	Part 90S	L	2444	-63.20	RMS	26.68	-24.25	0.91	-95.23	28.69	-13.00	-50.20	V	8
2	NR SA n26	Part 90S	M	2444	-63.68	RMS	26.68	-24.25	0.91	-95.23	28.21	-13.00	-50.68	V	8
3	NR SA n26	Part 90S	M	3270	-64.77	RMS	27.98	-23.81	1.05	-95.23	25.24	-13.00	-51.77	V	8
4	NR SA n14	Part 90R	M	1582	-66.98	RMS	24.52	-25.19	1.06	-95.23	27.86	-42.15	-24.83	H	8




Ant. 8

Part 22H Mode 1

NR SA n5 20M Ch166800 1RB1 BPSK

L

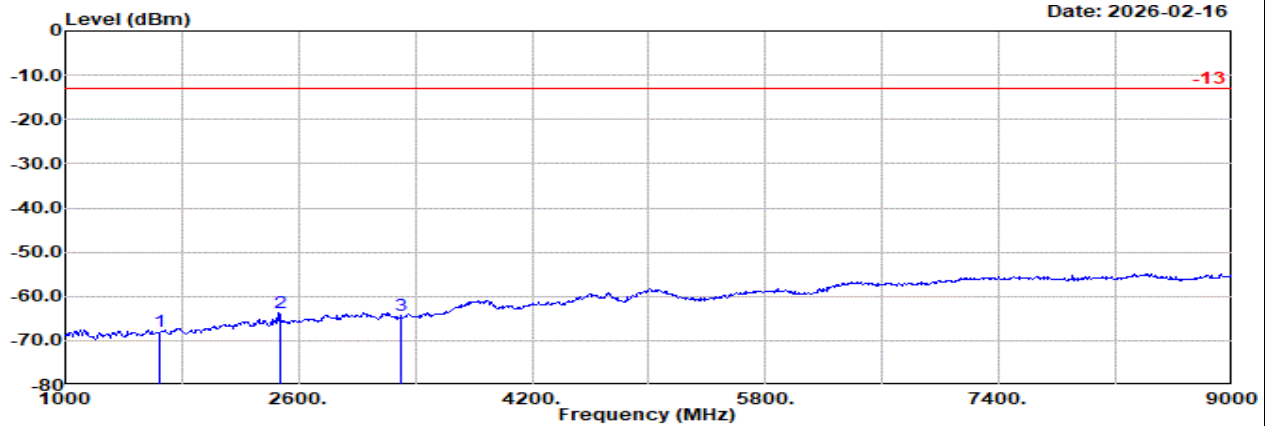


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1651.00	-67.85	RMS	24.69	-25.13	1.08	-95.23	26.74	-13.00	-54.85	Horizontal
2	2476.00	-63.58	RMS	26.60	-24.21	0.91	-95.23	28.35	-13.00	-50.58	Horizontal
3	3301.00	-64.43	RMS	28.10	-23.84	1.06	-95.23	25.48	-13.00	-51.43	Horizontal

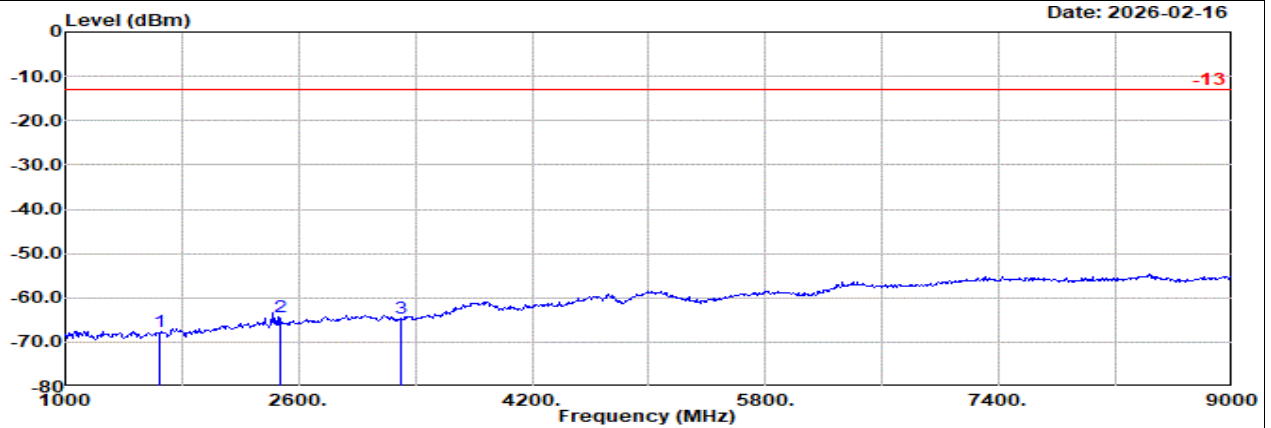

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1651.00	-67.66	RMS	24.69	-25.13	1.08	-95.23	26.93	-13.00	-54.66	Vertical
2	2476.00	-64.30	RMS	26.60	-24.21	0.91	-95.23	27.63	-13.00	-51.30	Vertical
3	3301.00	-64.64	RMS	28.10	-23.84	1.06	-95.23	25.27	-13.00	-51.64	Vertical




Ant. 8

Part 22H Mode 1

NR SA n5 20M Ch167300 1RB1 BPSK

M

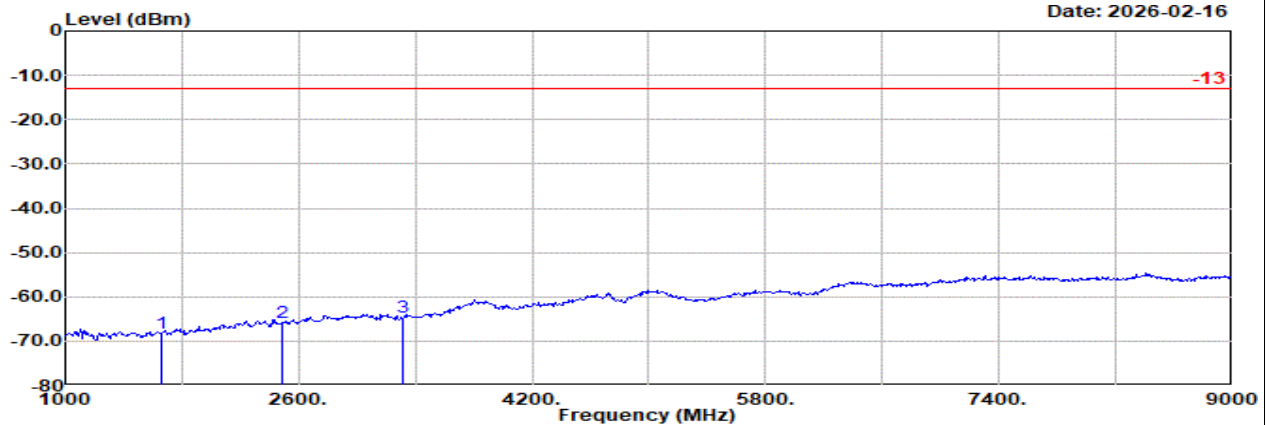


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: NR SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1				g		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm	dB	
1	1656.00	-68.17	RMS	24.64	-25.13	1.08	-95.23	26.47	-13.00	-55.17	Horizontal
2	2483.00	-65.69	RMS	26.66	-24.21	0.91	-95.23	26.18	-13.00	-52.69	Horizontal
3	3311.00	-64.58	RMS	28.12	-23.84	1.06	-95.23	25.31	-13.00	-51.58	Horizontal

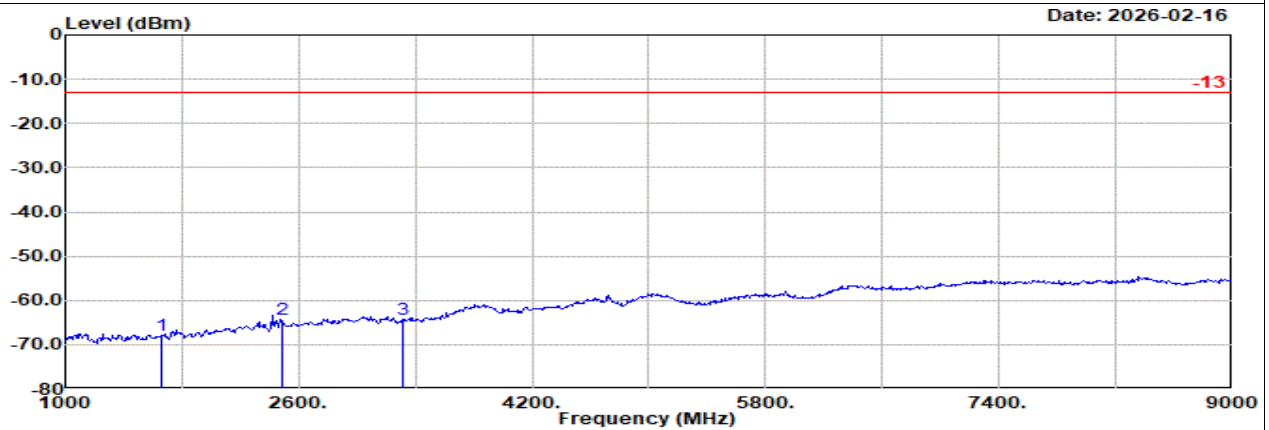

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: NR SA n5 20M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-68.00	RMS	24.64	-25.13	1.08	-95.23	26.64	-13.00	-55.00	Vertical
2	2483.00	-64.25	RMS	26.66	-24.21	0.91	-95.23	27.62	-13.00	-51.25	Vertical
3	3311.00	-64.21	RMS	28.12	-23.84	1.06	-95.23	25.68	-13.00	-51.21	Vertical




Ant. 8

Part 22H Mode 1

NR SA n5 20M Ch167800 1RB1 BPSK

H

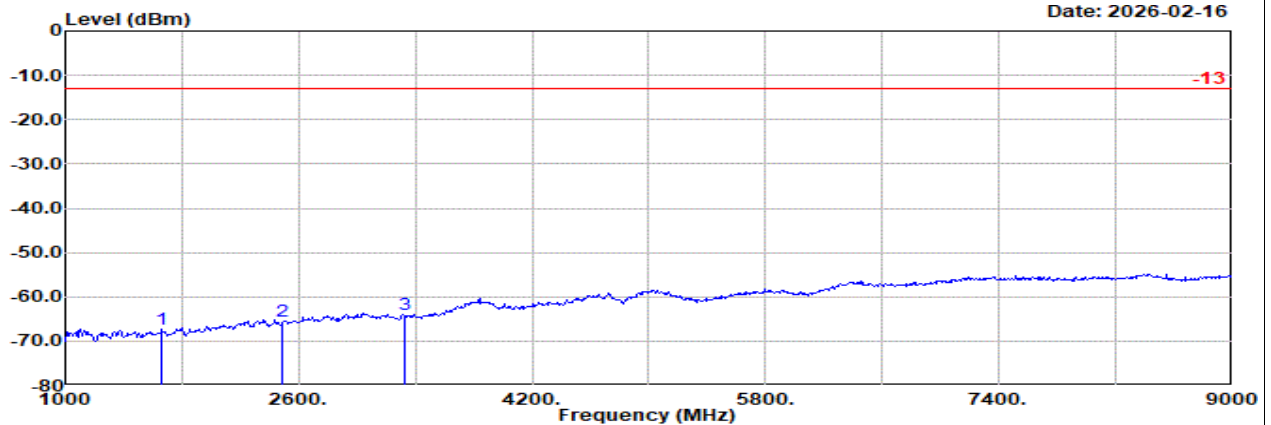


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n5 20M Ch167800 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin g	Limit g	Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB	
1	1661.00	-67.39	RMS	24.60	-25.13	1.08	-95.23	27.29	-13.00	-54.39	Horizontal		
2	2491.00	-65.56	RMS	26.80	-24.20	0.91	-95.23	26.16	-13.00	-52.56	Horizontal		
3	3321.00	-64.04	RMS	28.14	-23.85	1.06	-95.23	25.84	-13.00	-51.04	Horizontal		

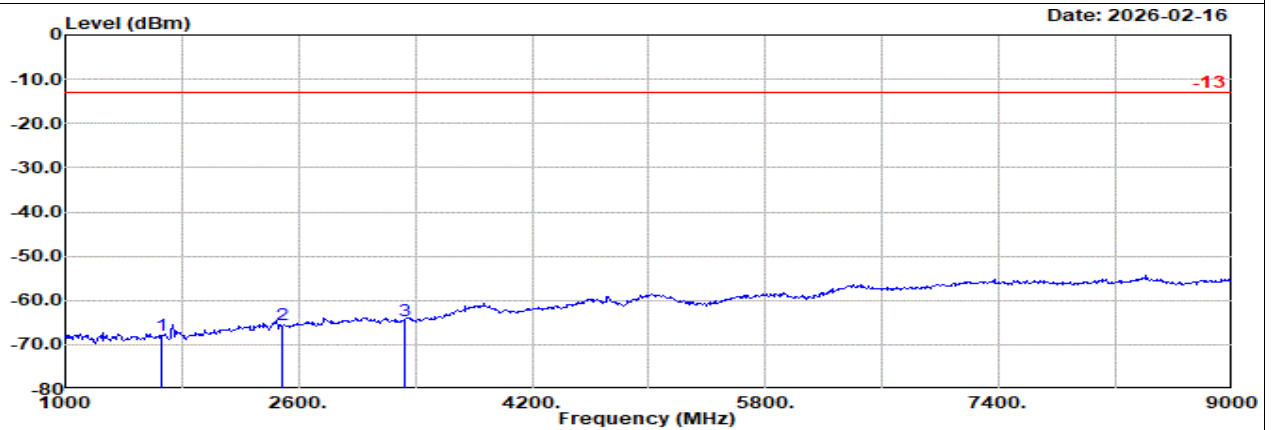

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n5 20M Ch167800 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin g	Limit g	Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB	
1	1661.00	-67.83	RMS	24.60	-25.13	1.08	-95.23	26.85	-13.00	-54.83	Vertical		
2	2491.00	-65.54	RMS	26.80	-24.20	0.91	-95.23	26.18	-13.00	-52.54	Vertical		
3	3321.00	-64.63	RMS	28.14	-23.85	1.06	-95.23	25.25	-13.00	-51.63	Vertical		




Ant. 8

Part 22H Mode 2

NR SA n26 15M Ch166300 1RB1 BPSK

L

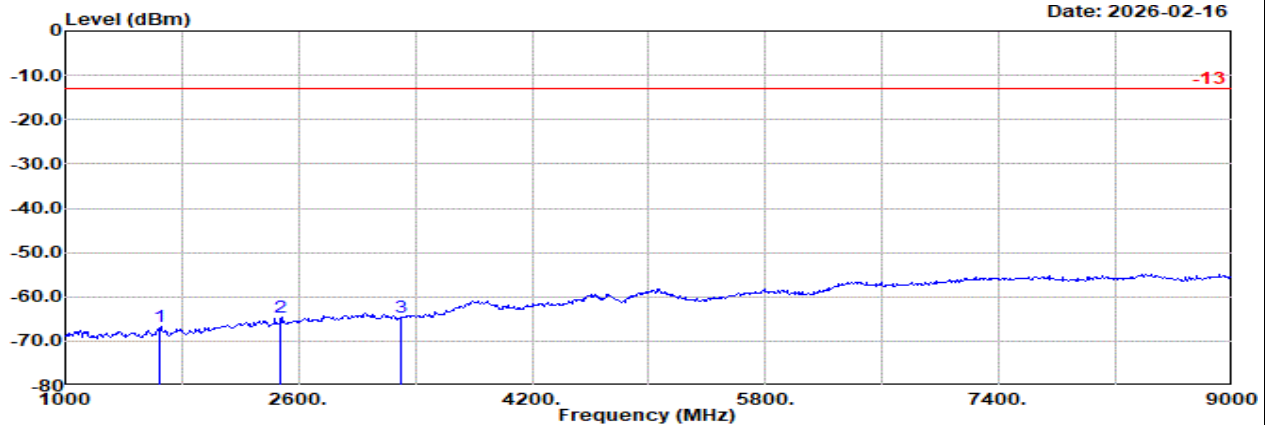


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 15M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1651.00	-66.72	RMS	24.69	-25.13	1.08	-95.23	27.87	-13.00	-53.72	Horizontal
2	2476.00	-64.47	RMS	26.60	-24.21	0.91	-95.23	27.46	-13.00	-51.47	Horizontal
3	3301.00	-64.52	RMS	28.10	-23.84	1.06	-95.23	25.39	-13.00	-51.52	Horizontal

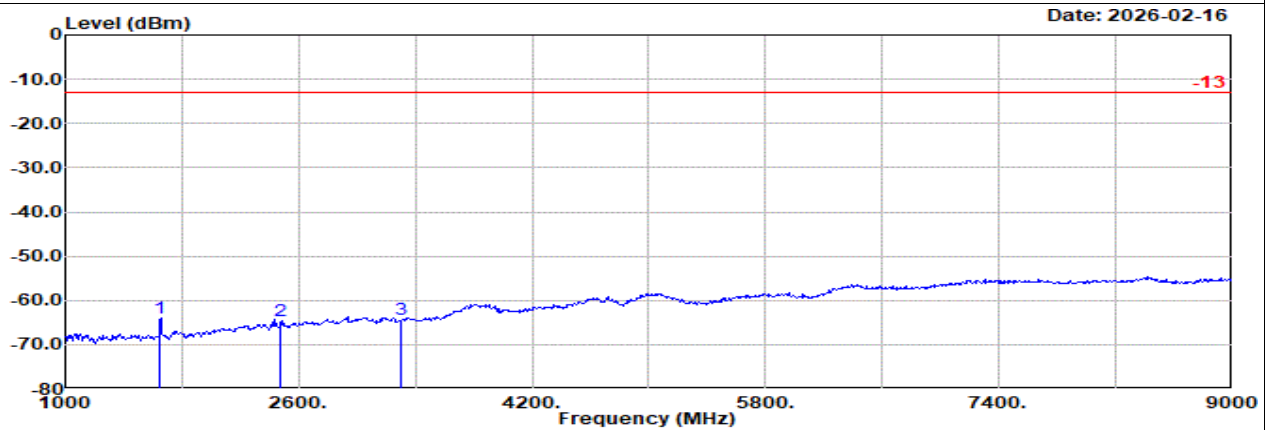

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 15M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1651.00	-63.92	RMS	24.69	-25.13	1.08	-95.23	30.67	-13.00	-50.92	Vertical
2	2476.00	-64.70	RMS	26.60	-24.21	0.91	-95.23	27.23	-13.00	-51.70	Vertical
3	3301.00	-64.43	RMS	28.10	-23.84	1.06	-95.23	25.48	-13.00	-51.43	Vertical




Ant. 8

Part 22H Mode 2

NR SA n26 15M Ch167300 1RB1 BPSK

M

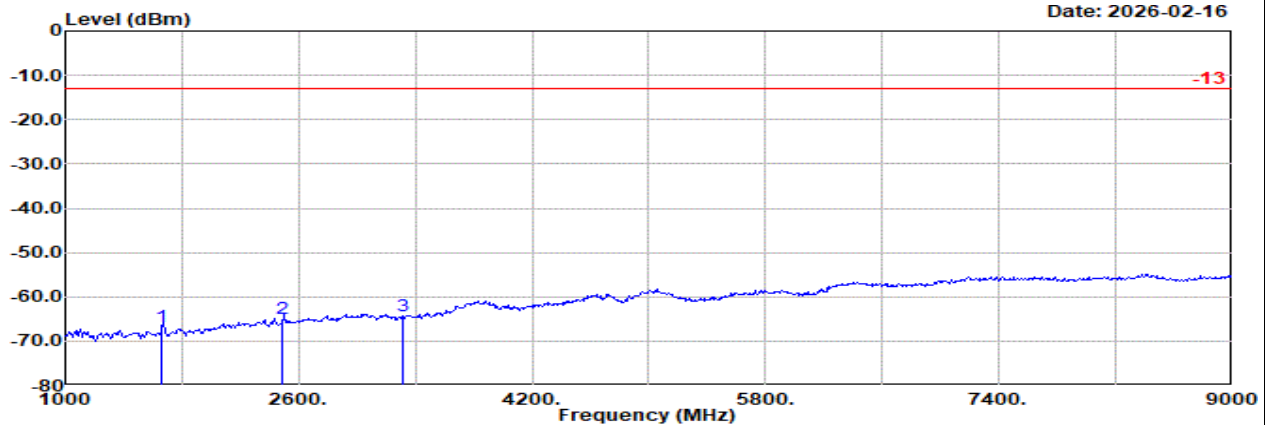


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 15M Ch167300 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1				g		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm		
1	1656.00	-66.61	RMS	24.64	-25.13	1.08	-95.23	28.03	-13.00	-53.61	Horizontal
2	2483.00	-64.76	RMS	26.66	-24.21	0.91	-95.23	27.11	-13.00	-51.76	Horizontal
3	3311.00	-64.44	RMS	28.12	-23.84	1.06	-95.23	25.45	-13.00	-51.44	Horizontal

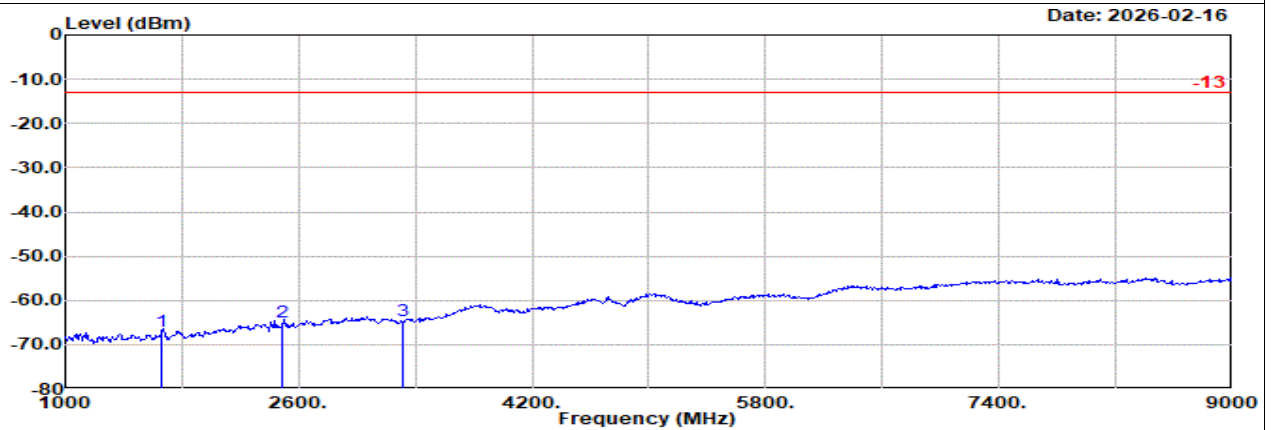

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 15M Ch167300 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB/m			dB	dB		
1	1656.00	-67.09	RMS	24.64	-25.13	1.08	-95.23	27.55	-13.00	-54.09	Vertical
2	2483.00	-64.97	RMS	26.66	-24.21	0.91	-95.23	26.90	-13.00	-51.97	Vertical
3	3311.00	-64.54	RMS	28.12	-23.84	1.06	-95.23	25.35	-13.00	-51.54	Vertical




Ant. 8

Part 22H Mode 2

NR SA n26 15M Ch168300 1RB1 BPSK

H

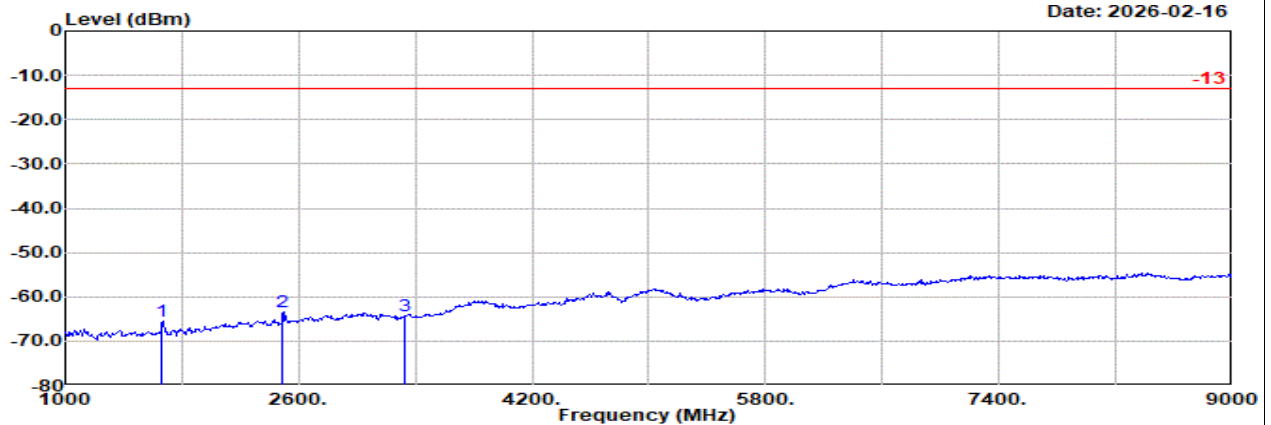


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n26 15M Ch168300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1661.00	-65.59	RMS	24.60	-25.13	1.08	-95.23	29.09	-13.00	-52.59	Horizontal
2	2491.00	-63.44	RMS	26.80	-24.20	0.91	-95.23	28.28	-13.00	-50.44	Horizontal
3	3321.00	-64.36	RMS	28.14	-23.85	1.06	-95.23	25.52	-13.00	-51.36	Horizontal

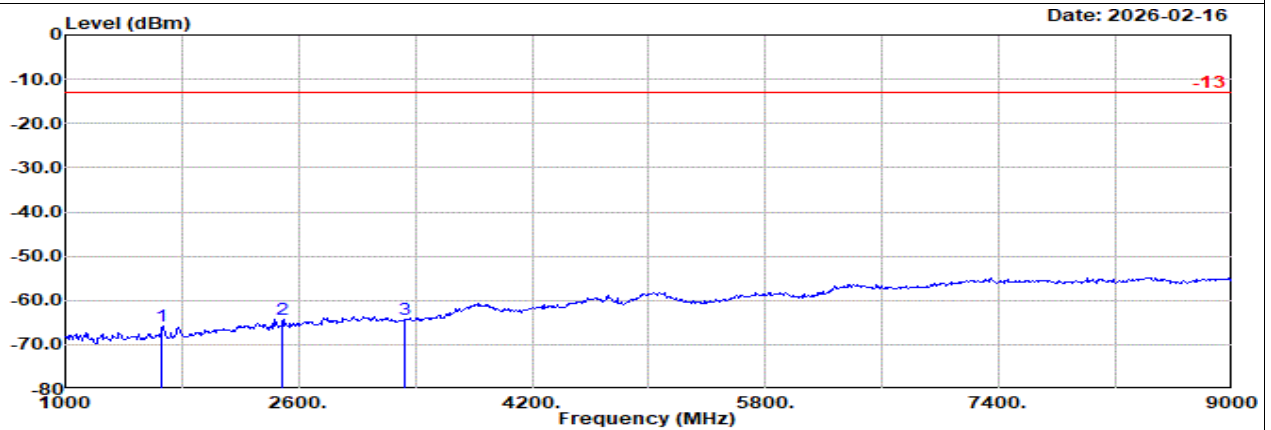

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n26 15M Ch168300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1661.00	-65.78	RMS	24.60	-25.13	1.08	-95.23	28.90	-13.00	-52.78	Vertical
2	2491.00	-64.32	RMS	26.80	-24.20	0.91	-95.23	27.40	-13.00	-51.32	Vertical
3	3321.00	-64.16	RMS	28.14	-23.85	1.06	-95.23	25.72	-13.00	-51.16	Vertical




Ant. 2+8

Part 22H Mode 3


EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch166800 1RB1 BPSK

L

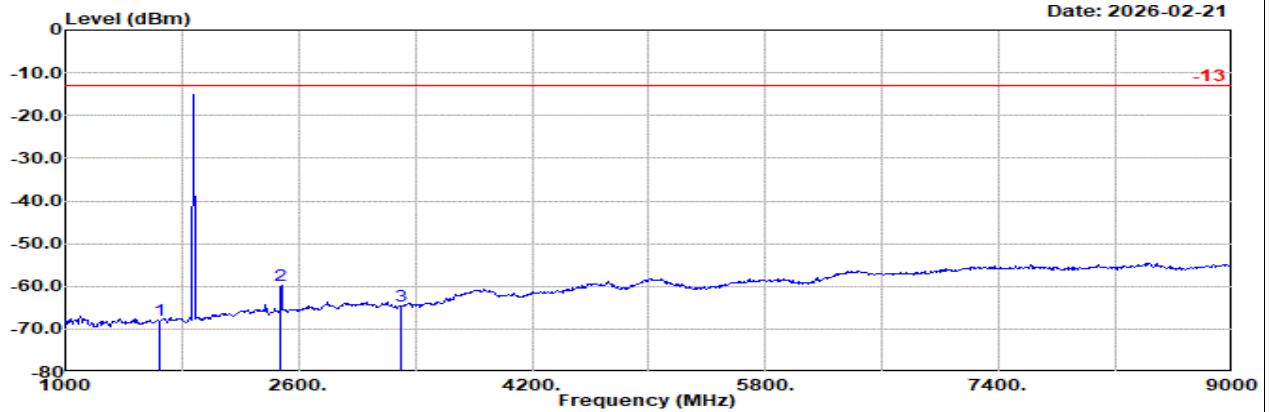

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1651.00	-67.78	RMS		24.69	-25.13	1.08	-95.23	-68.22	-13.00	-54.78
2	2476.00	-59.84	RMS		26.60	-24.21	0.91	-95.23	32.09	-13.00	-46.84
3	3301.00	-64.58	RMS		28.10	-23.84	1.06	-95.23	25.33	-13.00	-51.58

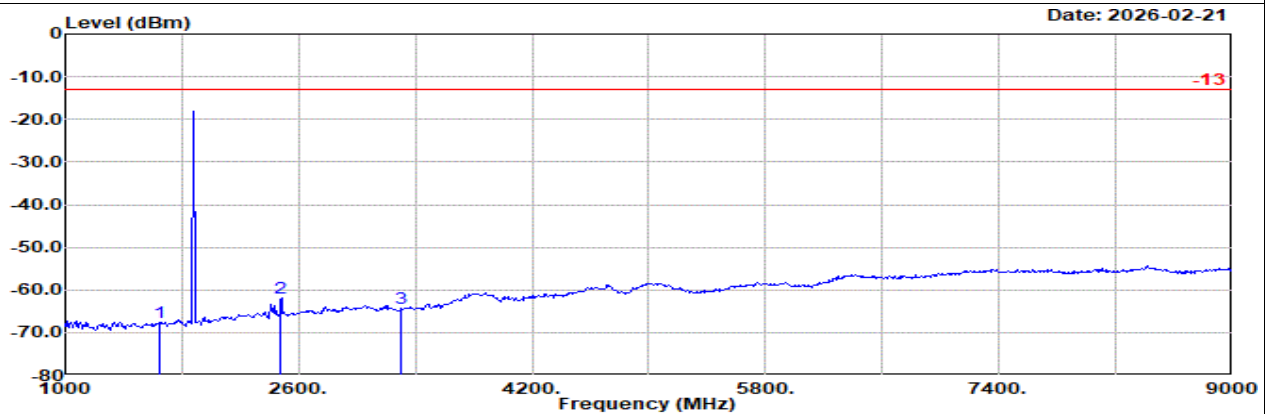

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch166800 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1651.00	-67.62	RMS		24.69	-25.13	1.08	-95.23	26.97	-13.00	-54.62
2	2476.00	-61.96	RMS		26.60	-24.21	0.91	-95.23	29.97	-13.00	-48.96
3	3301.00	-64.34	RMS		28.10	-23.84	1.06	-95.23	25.57	-13.00	-51.34




Ant. 2+8

Part 22H Mode 3


EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch167300 1RB1 BPSK

M

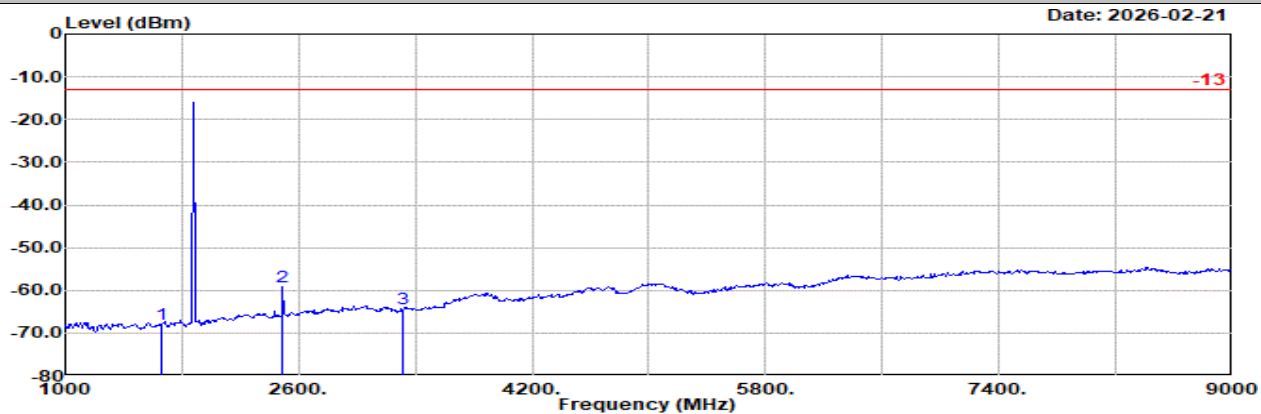

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch167300 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-67.78	RMS	24.64	-25.13	1.08	-95.23	26.86	-13.00	-54.78	Horizontal	
2	2483.00	-59.18	RMS	26.66	-24.21	0.91	-95.23	32.69	-13.00	-46.18	Horizontal	
3	3311.00	-64.20	RMS	28.12	-23.84	1.06	-95.23	25.69	-13.00	-51.20	Horizontal	

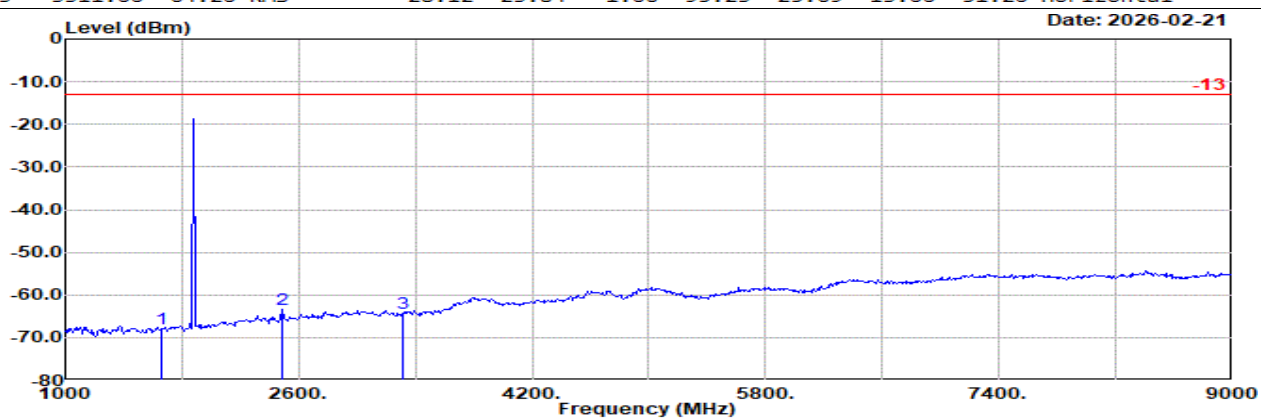

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch167300 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-67.92	RMS	24.64	-25.13	1.08	-95.23	26.72	-13.00	-54.92	Vertical	
2	2483.00	-63.37	RMS	26.66	-24.21	0.91	-95.23	28.50	-13.00	-50.37	Vertical	
3	3311.00	-64.16	RMS	28.12	-23.84	1.06	-95.23	25.73	-13.00	-51.16	Vertical	




Ant. 2+8

Part 22H Mode 3


EN-DC B2+n5 10M + 20M Ch18900 1RB0 QPSK + Ch167800 1RB1 BPSK

H

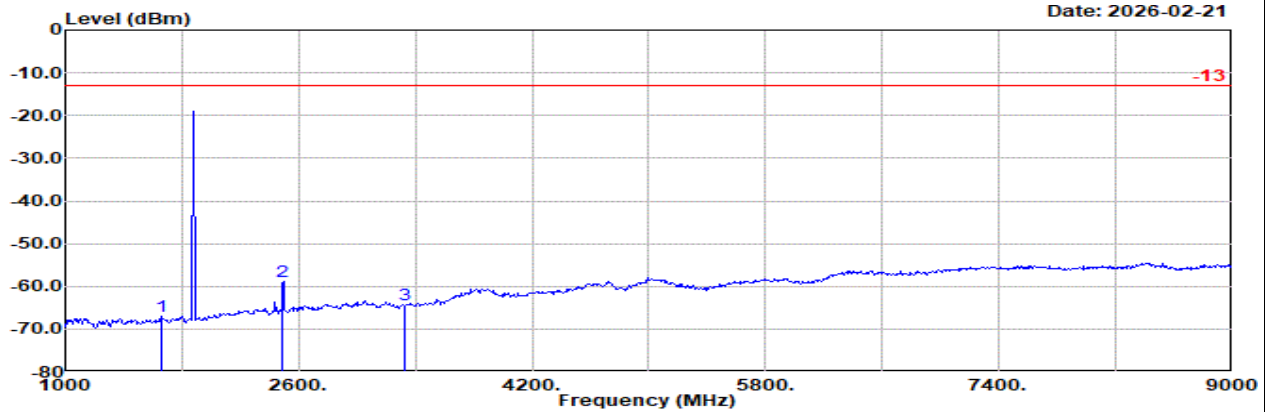

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch167800 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1661.00	-66.97	RMS	24.60	-25.13	1.08	-95.23	27.71	-13.00	-53.97	Horizontal	
2	2491.00	-58.72	RMS	26.80	-24.20	0.91	-95.23	33.00	-13.00	-45.72	Horizontal	
3	3321.00	-64.44	RMS	28.14	-23.85	1.06	-95.23	25.44	-13.00	-51.44	Horizontal	

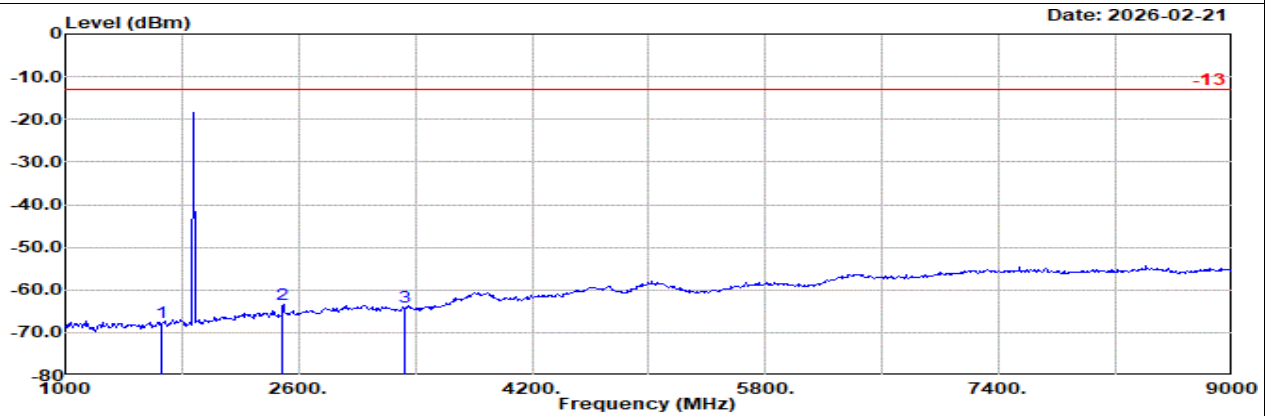

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n5 20M Ch167800 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1661.00	-67.56	RMS	24.60	-25.13	1.08	-95.23	27.12	-13.00	-54.56	Vertical	
2	2491.00	-63.25	RMS	26.80	-24.20	0.91	-95.23	28.47	-13.00	-50.25	Vertical	
3	3321.00	-64.07	RMS	28.14	-23.85	1.06	-95.23	25.81	-13.00	-51.07	Vertical	




Ant. 1

Part 24E Mode 1

NR SA n25 30M Ch373000 1RB1 BPSK

L

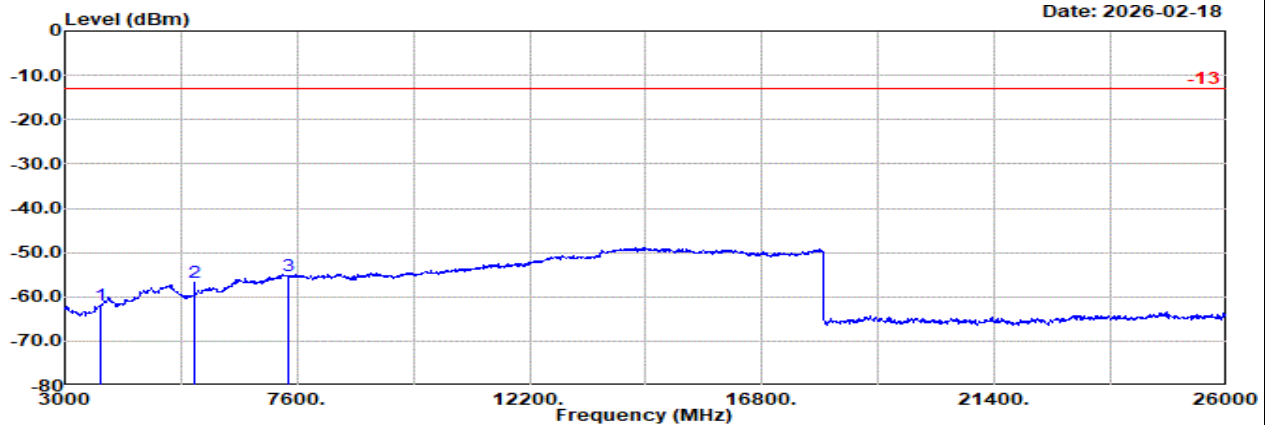


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n25 30M Ch373000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-61.78	RMS	29.63	-23.74	1.68	-95.23	25.88	-13.00	-48.78	Horizontal	
2	5555.00	-56.65	RMS	32.72	-21.83	1.54	-95.23	26.15	-13.00	-43.65	Horizontal	
3	7407.00	-55.25	RMS	36.89	-21.25	1.45	-95.23	22.89	-13.00	-42.25	Horizontal	

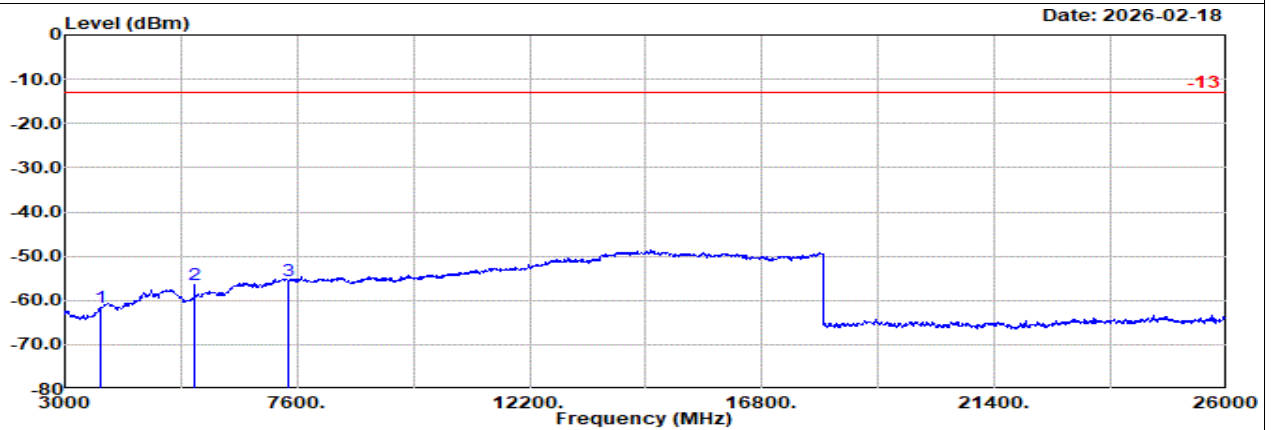

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n25 30M Ch373000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-61.71	RMS	29.63	-23.74	1.68	-95.23	25.95	-13.00	-48.71	Vertical	
2	5555.00	-56.56	RMS	32.72	-21.83	1.54	-95.23	26.24	-13.00	-43.56	Vertical	
3	7407.00	-55.46	RMS	36.89	-21.25	1.45	-95.23	22.68	-13.00	-42.46	Vertical	




Ant. 1

Part 24E Mode 1

NR SA n25 30M Ch376500 1RB1 BPSK

M

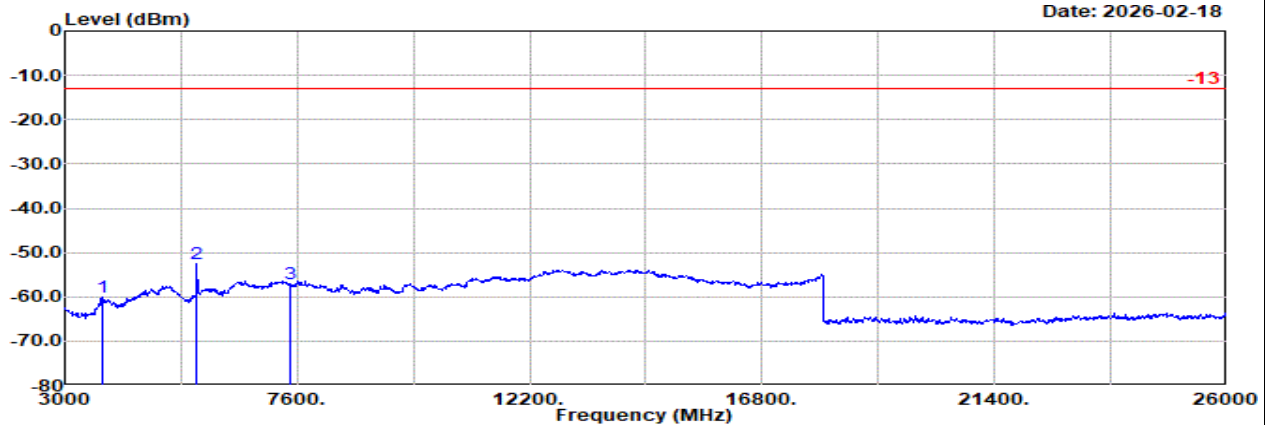


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n25 30M Ch376500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3739.00	-60.04	RMS	29.91	-23.66	1.68	-95.23	27.26	-13.00	-47.04	Horizontal	
2	5608.00	-52.44	RMS	32.93	-21.84	1.52	-95.23	30.18	-13.00	-39.44	Horizontal	
3	7477.00	-57.09	RMS	36.75	-21.18	1.51	-95.23	21.06	-13.00	-44.09	Horizontal	

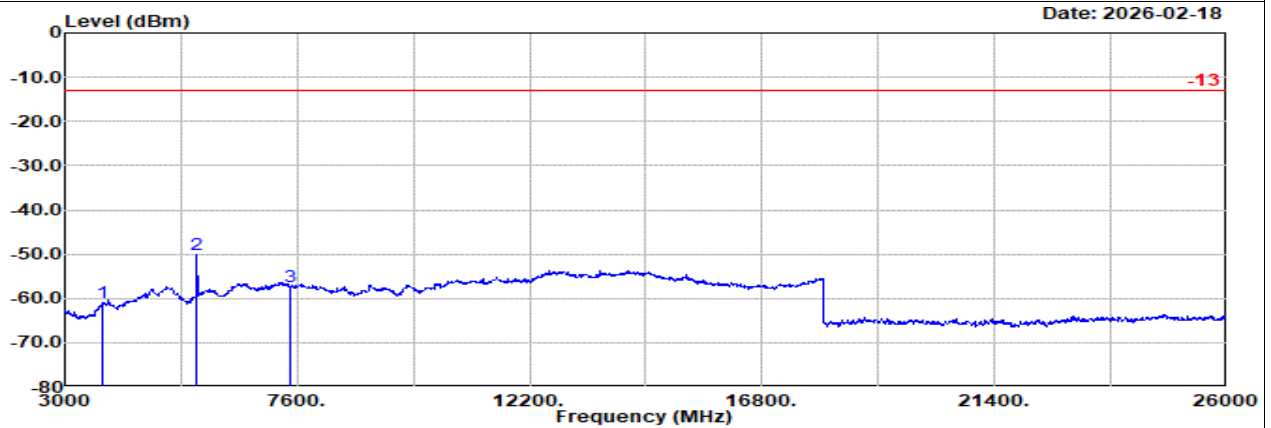

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n25 30M Ch376500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3739.00	-61.11	RMS	29.91	-23.66	1.68	-95.23	26.19	-13.00	-48.11	Vertical	
2	5608.00	-50.23	RMS	32.93	-21.84	1.52	-95.23	32.39	-13.00	-37.23	Vertical	
3	7477.00	-57.30	RMS	36.75	-21.18	1.51	-95.23	20.85	-13.00	-44.30	Vertical	




Ant. 1

Part 24E Mode 1

NR SA n25 30M Ch380000 1RB1 BPSK

H

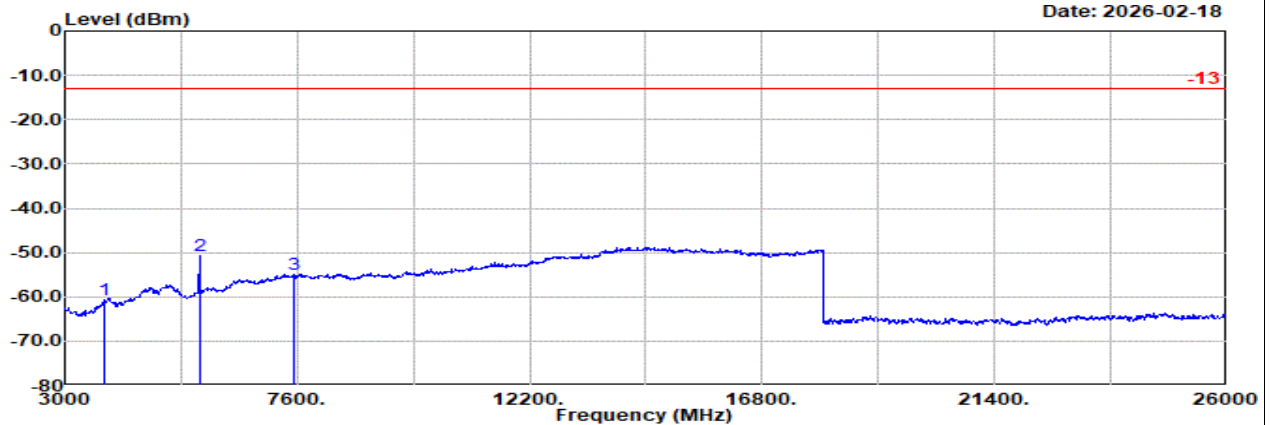


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n25 30M Ch380000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	3774.00	-60.63	RMS	30.10	-23.59	1.67	-95.23	26.42	-13.00	-47.63	Horizontal	
2	5660.00	-50.74	RMS	33.16	-21.84	1.55	-95.23	31.62	-13.00	-37.74	Horizontal	
3	7547.00	-55.08	RMS	36.61	-21.19	1.58	-95.23	23.15	-13.00	-42.08	Horizontal	

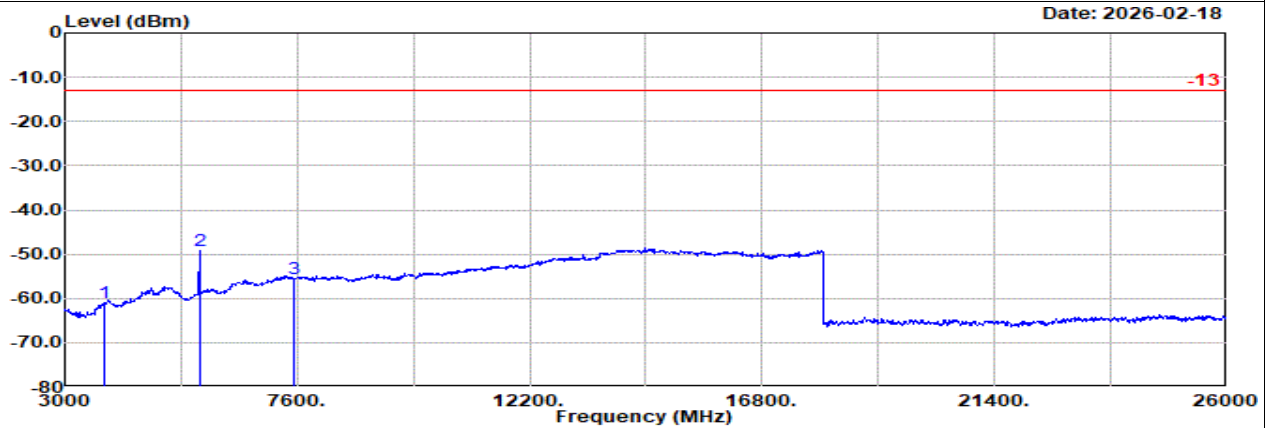

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n25 30M Ch380000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	3774.00	-60.95	RMS	30.10	-23.59	1.67	-95.23	26.10	-13.00	-47.95	Vertical	
2	5660.00	-49.25	RMS	33.16	-21.84	1.55	-95.23	33.11	-13.00	-36.25	Vertical	
3	7547.00	-55.43	RMS	36.61	-21.19	1.58	-95.23	22.80	-13.00	-42.43	Vertical	




Ant. 8+2

Part 24E Mode 2


EN-DC B5+n2 10M + 20M Ch20525 1RB0 QPSK + Ch372000 1RB1 BPSK

L

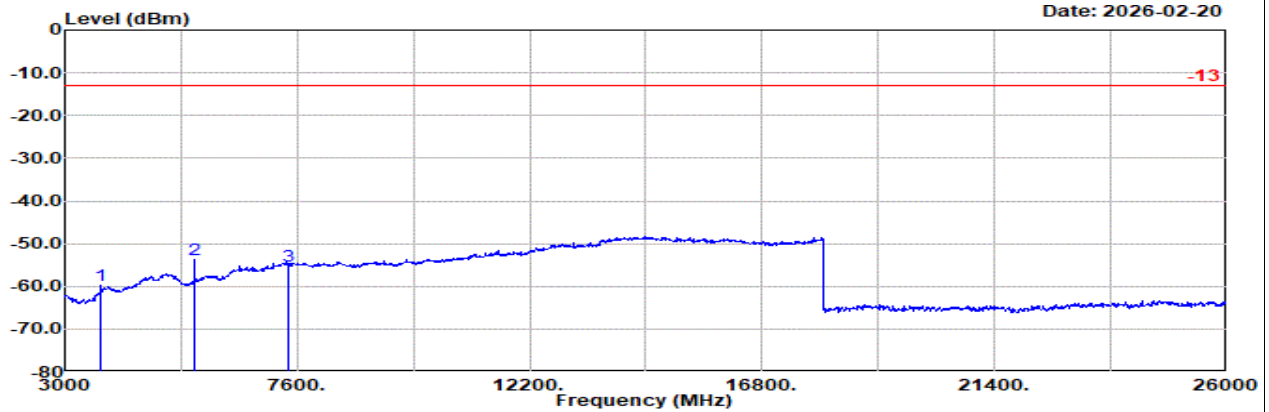

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch372000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	3703.00	-59.72	RMS	29.62	-23.74	1.68	-95.23	27.95	-13.00	-46.72	Horizontal
2	5554.00	-53.73	RMS	32.72	-21.83	1.54	-95.23	29.07	-13.00	-40.73	Horizontal
3	7405.00	-55.10	RMS	36.89	-21.25	1.44	-95.23	23.05	-13.00	-42.10	Horizontal

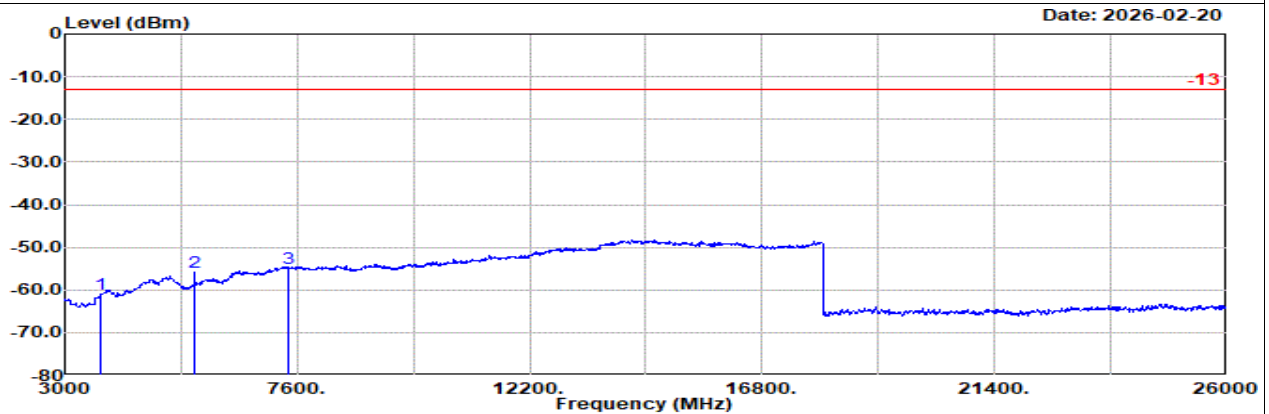

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch372000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	3703.00	-61.06	RMS	29.62	-23.74	1.68	-95.23	26.61	-13.00	-48.06	Vertical
2	5554.00	-55.97	RMS	32.72	-21.83	1.54	-95.23	26.83	-13.00	-42.97	Vertical
3	7405.00	-55.06	RMS	36.89	-21.25	1.44	-95.23	23.09	-13.00	-42.06	Vertical




Ant. 8+2

Part 24E Mode 2


EN-DC B5+n2 10M + 20M Ch20525 1RB0 QPSK + Ch376000 1RB1 BPSK

M

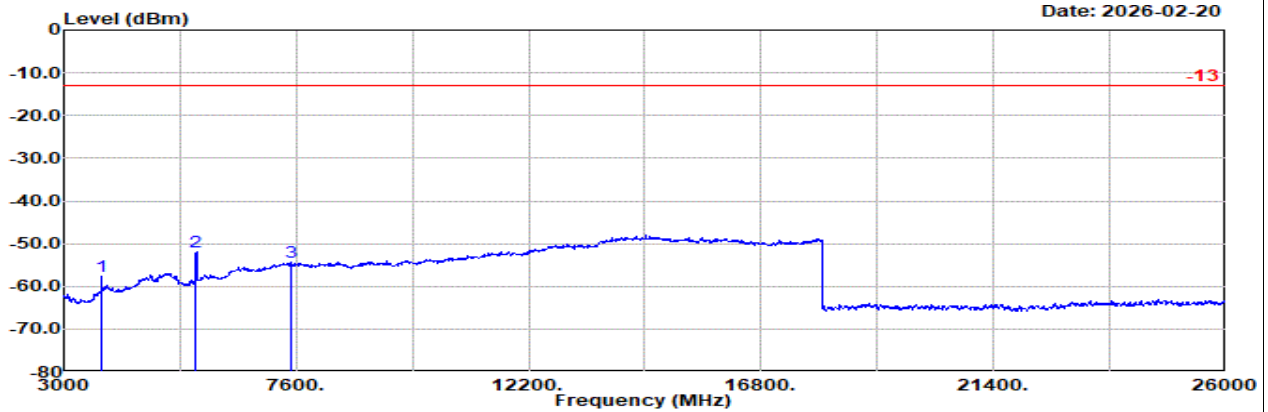

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	Amp\Cb							
	MHz	dBm			1							
1	3743.00	-57.73	RMS	29.94	-23.66	1.68	-95.23	29.54	-13.00	-44.73		Horizontal
2	5614.00	-51.91	RMS	32.96	-21.84	1.53	-95.23	30.67	-13.00	-38.91		Horizontal
3	7485.00	-54.44	RMS	36.73	-21.17	1.52	-95.23	23.71	-13.00	-41.44		Horizontal

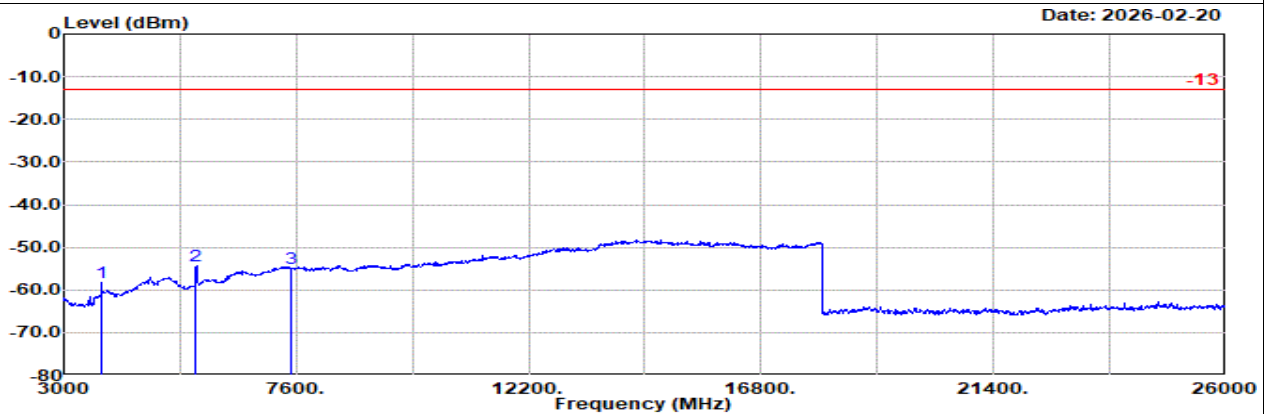

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch376000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	Amp\Cb							
	MHz	dBm			1							
1	3743.00	-58.24	RMS	29.94	-23.66	1.68	-95.23	29.03	-13.00	-45.24		Vertical
2	5614.00	-54.24	RMS	32.96	-21.84	1.53	-95.23	28.34	-13.00	-41.24		Vertical
3	7485.00	-54.84	RMS	36.73	-21.17	1.52	-95.23	23.31	-13.00	-41.84		Vertical




Ant. 8+2

Part 24E Mode 2


EN-DC B5+n2 10M + 20M Ch20525 1RB0 QPSK + Ch380000 1RB1 BPSK

H

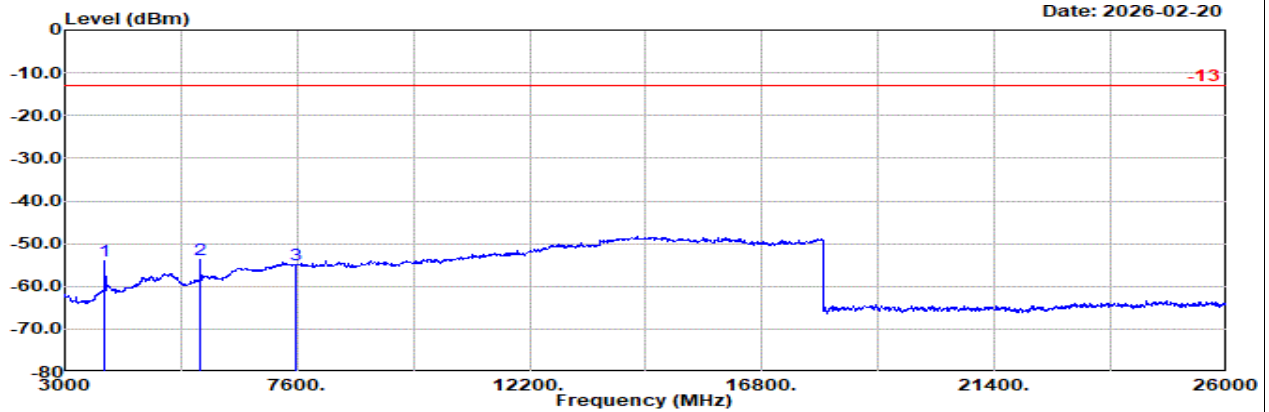

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3783.00	-54.16	RMS	30.13	-23.57	1.67	-95.23	32.84	-13.00	-41.16	Horizontal		
2	5674.00	-53.83	RMS	33.24	-21.84	1.56	-95.23	28.44	-13.00	-40.83	Horizontal		
3	7565.00	-54.99	RMS	36.60	-21.20	1.60	-95.23	23.24	-13.00	-41.99	Horizontal		

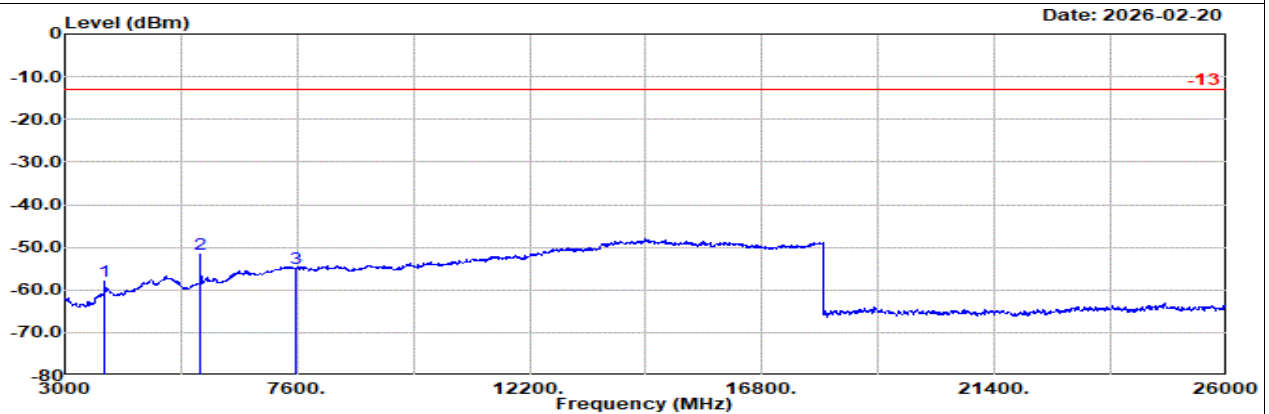

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n2 20M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3783.00	-57.93	RMS	30.13	-23.57	1.67	-95.23	29.07	-13.00	-44.93	Vertical		
2	5674.00	-51.70	RMS	33.24	-21.84	1.56	-95.23	30.57	-13.00	-38.70	Vertical		
3	7565.00	-54.85	RMS	36.60	-21.20	1.60	-95.23	23.38	-13.00	-41.85	Vertical		




Ant. 8+2

Part 24E Mode 3

EN-DC B5+n25 10M + 30M Ch20525 1RB0 QPSK + Ch373000 1RB1 BPSK

L

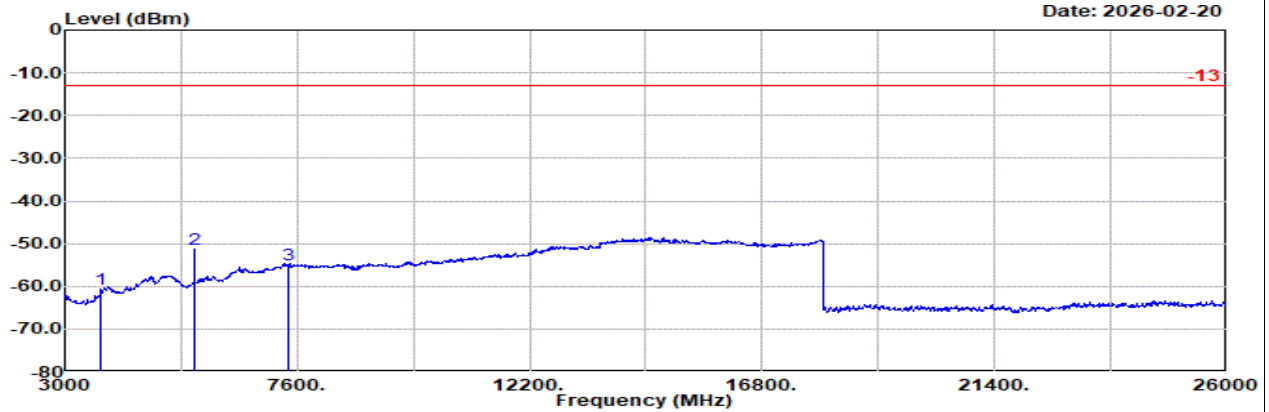


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch373000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
					dB/m	dB				dBm	dB		
1	3704.00	-60.58	RMS		29.63	-23.74	1.68	-95.23	27.08	-13.00	-47.58	Horizontal	
2	5555.00	-51.18	RMS		32.72	-21.83	1.54	-95.23	31.62	-13.00	-38.18	Horizontal	
3	7407.00	-55.03	RMS		36.89	-21.25	1.45	-95.23	23.11	-13.00	-42.03	Horizontal	

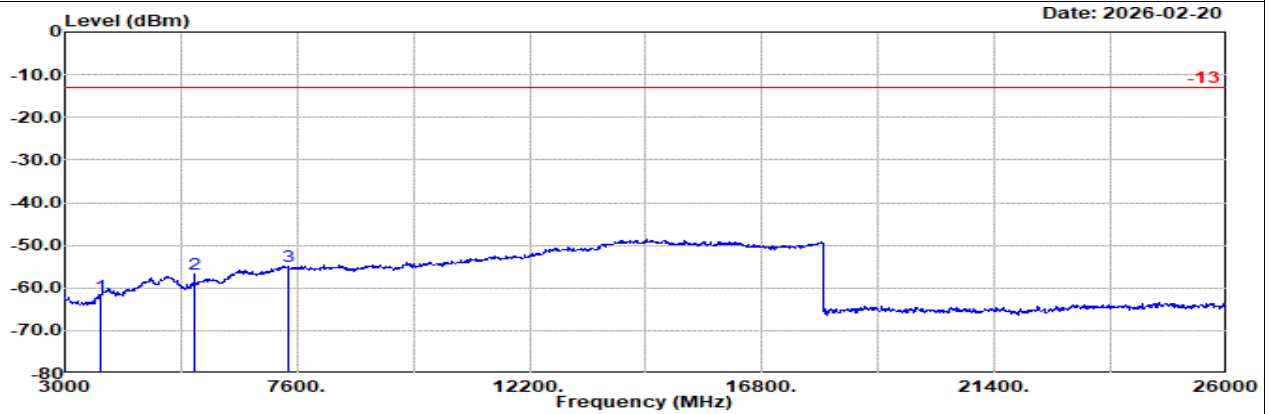

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch373000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
					dB/m	dB				dBm	dB		
1	3704.00	-61.89	RMS		29.63	-23.74	1.68	-95.23	25.77	-13.00	-48.89	Vertical	
2	5555.00	-56.75	RMS		32.72	-21.83	1.54	-95.23	26.05	-13.00	-43.75	Vertical	
3	7407.00	-54.87	RMS		36.89	-21.25	1.45	-95.23	23.27	-13.00	-41.87	Vertical	




Ant. 8+2

Part 24E Mode 3

EN-DC B5+n25 10M + 30M Ch20525 1RB0 QPSK + Ch376500 1RB1 BPSK

M

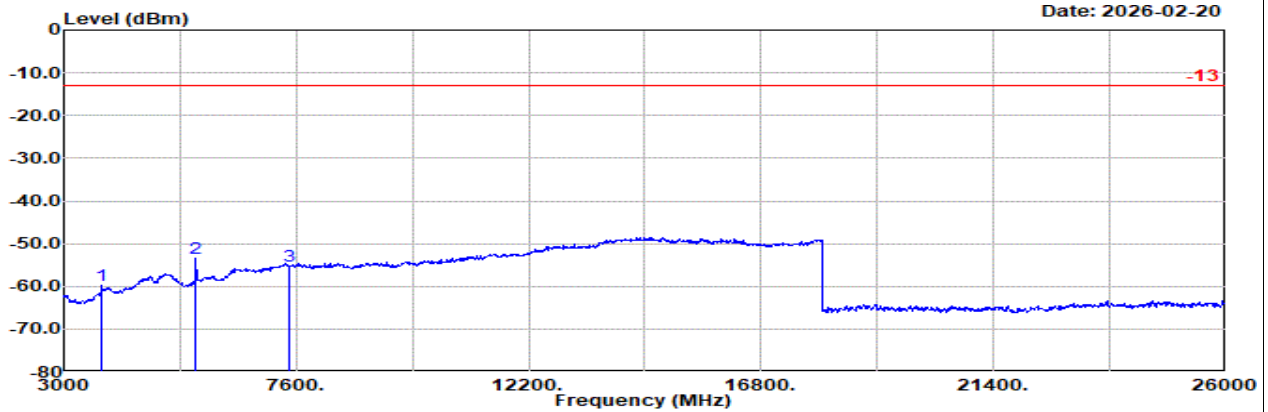


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch376500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3739.00	-59.90	RMS	29.91	-23.66	1.68	-95.23	27.40	-13.00	-46.90	Horizontal
2	5608.00	-53.48	RMS	32.93	-21.84	1.52	-95.23	29.14	-13.00	-40.48	Horizontal
3	7477.00	-55.18	RMS	36.75	-21.18	1.51	-95.23	22.97	-13.00	-42.18	Horizontal

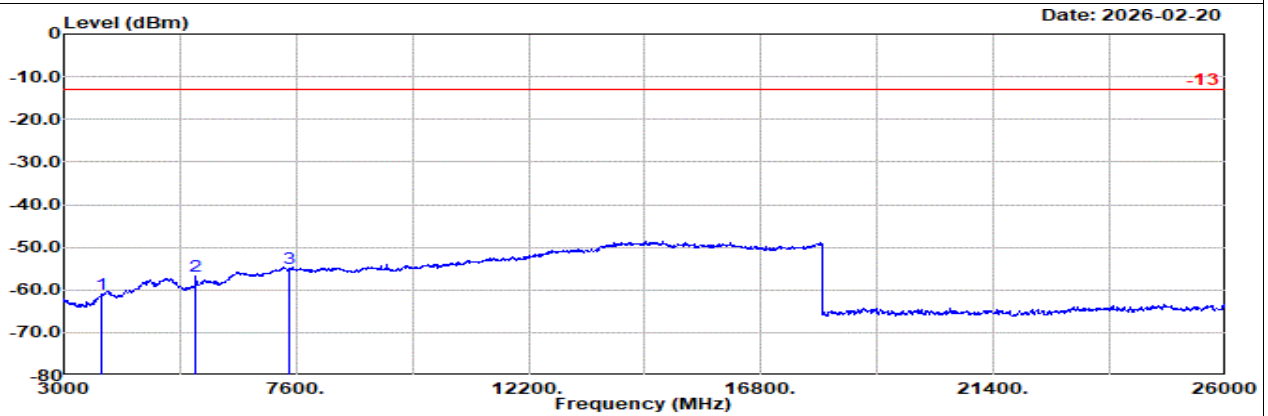

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch376500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3739.00	-61.11	RMS	29.91	-23.66	1.68	-95.23	26.19	-13.00	-48.11	Vertical
2	5608.00	-56.62	RMS	32.93	-21.84	1.52	-95.23	26.00	-13.00	-43.62	Vertical
3	7477.00	-55.07	RMS	36.75	-21.18	1.51	-95.23	23.08	-13.00	-42.07	Vertical




Ant. 8+2

Part 24E Mode 3

EN-DC B5+n25 10M + 30M Ch20525 1RB0 QPSK + Ch380000 1RB1 BPSK

H

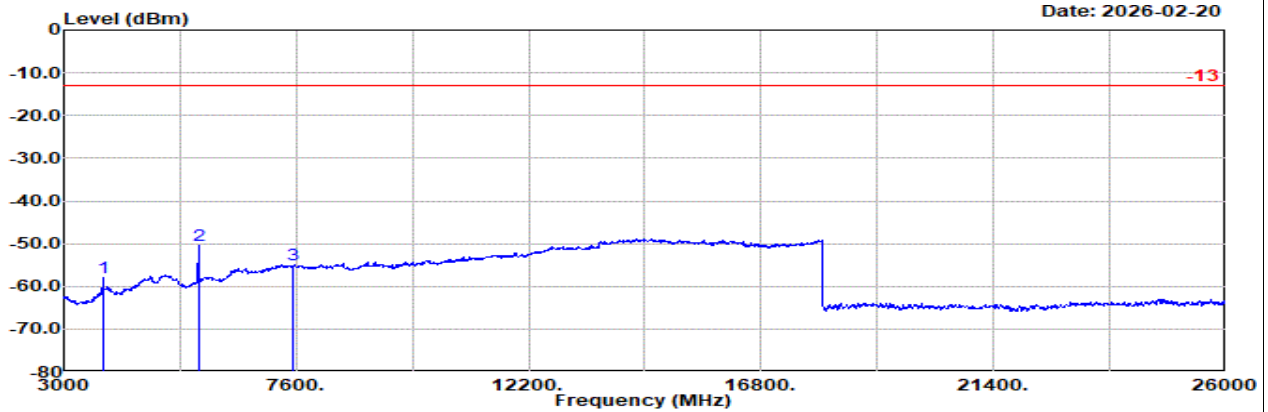


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin		Pol
					dB/m	dB							
	MHz	dBm					dB	dB	dBuV	dBm	dB		
1	3774.00	-58.10	RMS	30.10	-23.59	1.67	-95.23	28.95	-13.00	-45.10	Horizontal		
2	5660.00	-50.50	RMS	33.16	-21.84	1.55	-95.23	31.86	-13.00	-37.50	Horizontal		
3	7547.00	-54.98	RMS	36.61	-21.19	1.58	-95.23	23.25	-13.00	-41.98	Horizontal		

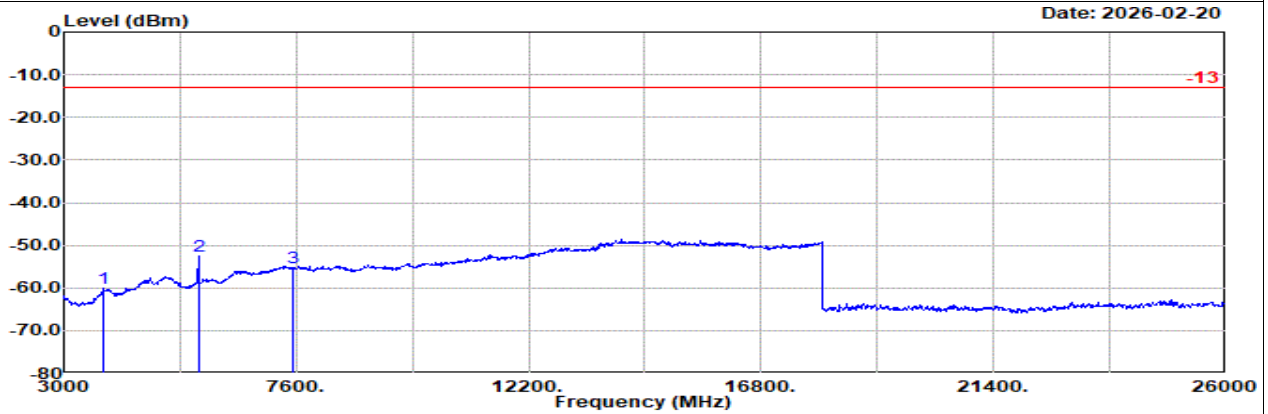

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch 20525 1RB0 QPSK

: SA n25 30M Ch380000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin		Pol
					dB/m	dB							
	MHz	dBm					dB	dB	dBuV	dBm	dB		
1	3774.00	-60.00	RMS	30.10	-23.59	1.67	-95.23	27.05	-13.00	-47.00	Vertical		
2	5660.00	-52.56	RMS	33.16	-21.84	1.55	-95.23	29.80	-13.00	-39.56	Vertical		
3	7547.00	-55.39	RMS	36.61	-21.19	1.58	-95.23	22.84	-13.00	-42.39	Vertical		




Ant. 8

Part 25 Mode 2

NR SA n53 10M Ch497860 1RB1 BPSK

M

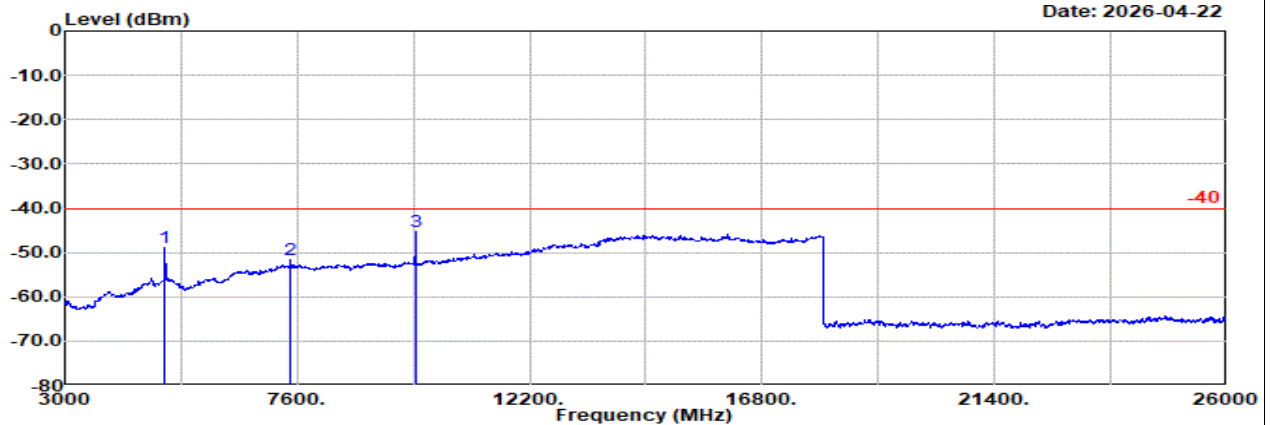


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_250702 Horizontal

: NR SA n53 10M Ch497860 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB		
1	4970.00	-49.04	RMS	32.68	-20.47	2.30	-95.23	31.68	-13.00	-36.04	Horizontal			
2	7455.00	-51.56	RMS	36.79	-19.53	1.49	-95.23	24.92	-13.00	-38.56	Horizontal			
3	9940.00	-45.27	RMS	37.02	-19.65	1.66	-95.23	30.93	-13.00	-32.27	Horizontal			

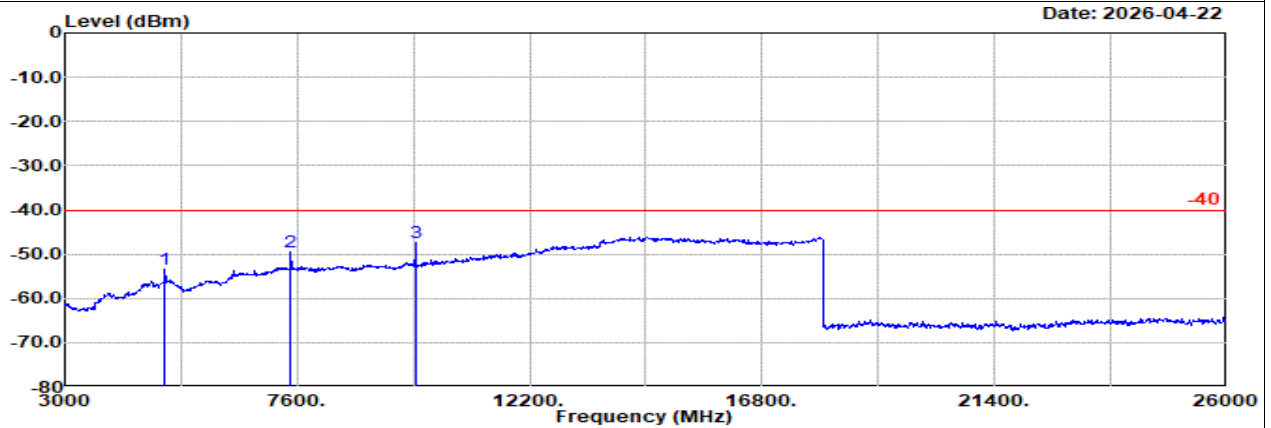

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_250702 Vertical

: NR SA n53 10M Ch497860 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB		
1	4970.00	-53.43	RMS	32.68	-20.47	2.30	-95.23	27.29	-13.00	-40.43	Vertical			
2	7455.00	-49.60	RMS	36.79	-19.53	1.49	-95.23	26.88	-13.00	-36.60	Vertical			
3	9940.00	-47.48	RMS	37.02	-19.65	1.66	-95.23	28.72	-13.00	-34.48	Vertical			




Ant. 5

Part 27L Mode 1

NR SA n66 35M Ch345500 1RB1 BPSK

L

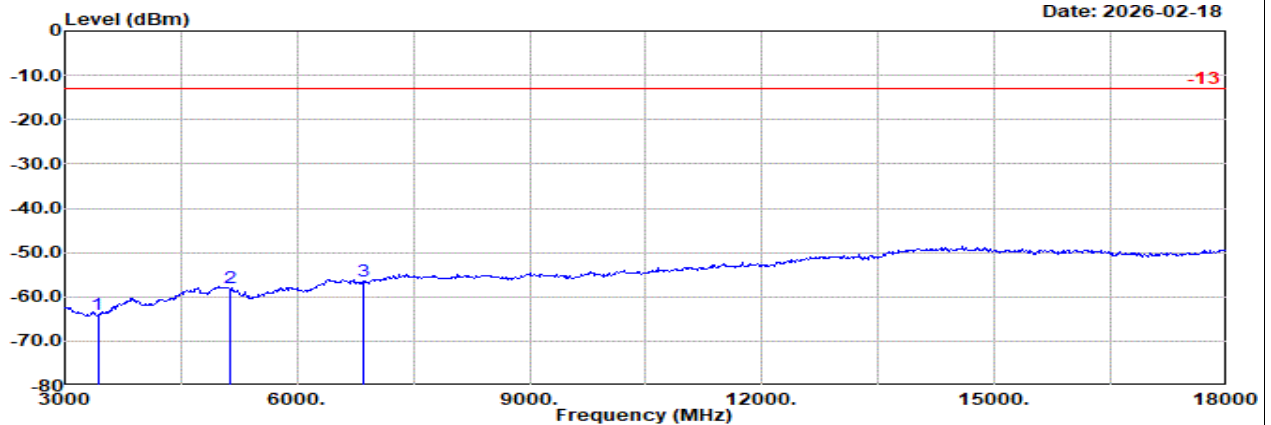


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 35M Ch345500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	EIRPCF		Readin Limit		Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB	dBuV	dBm	dB	
1	3425.00	-64.11	RMS	28.35	-23.94	1.88	-95.23	24.83	-13.00	-51.11	Horizontal	
2	5136.00	-57.98	RMS	32.50	-21.67	2.09	-95.23	24.33	-13.00	-44.98	Horizontal	
3	6848.00	-56.48	RMS	36.00	-21.56	1.46	-95.23	22.85	-13.00	-43.48	Horizontal	

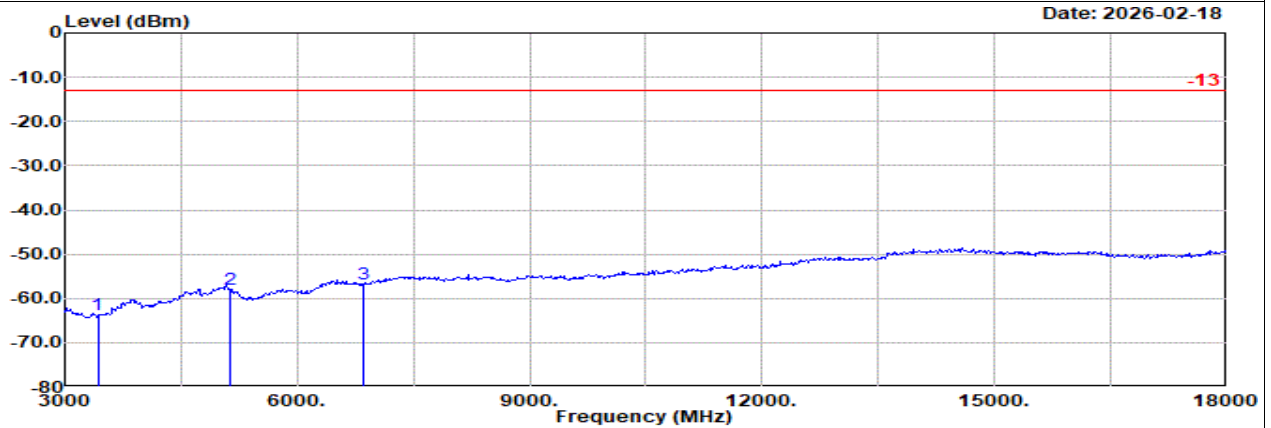

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 35M Ch345500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	EIRPCF		Readin Limit		Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB	dBuV	dBm	dB	
1	3425.00	-63.75	RMS	28.35	-23.94	1.88	-95.23	25.19	-13.00	-50.75	Vertical	
2	5136.00	-57.94	RMS	32.50	-21.67	2.09	-95.23	24.37	-13.00	-44.94	Vertical	
3	6848.00	-56.76	RMS	36.00	-21.56	1.46	-95.23	22.57	-13.00	-43.76	Vertical	




Ant. 5

Part 27L Mode 1

NR SA n66 35M Ch349000 1RB1 BPSK

M

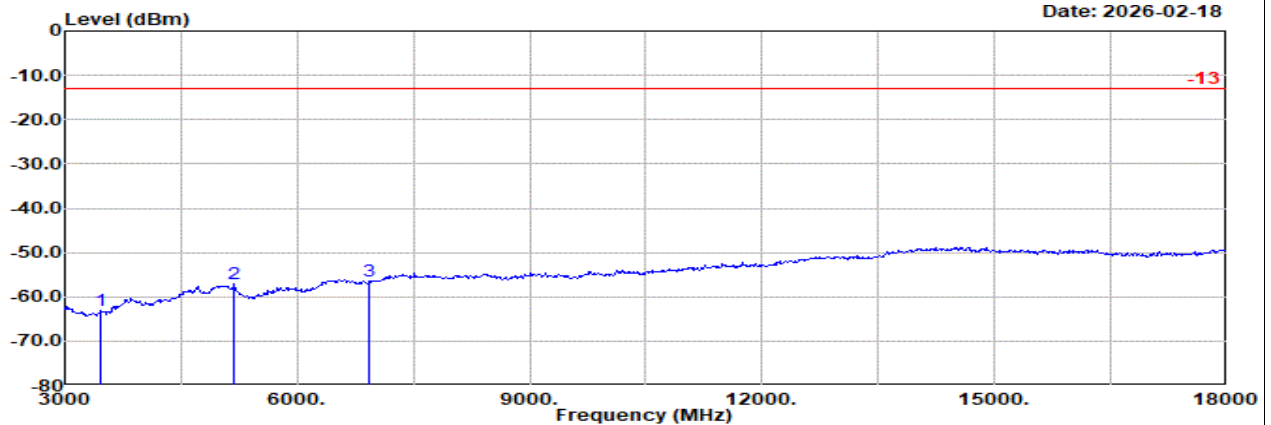


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 35M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3460.00	-63.24	RMS		28.46	-23.99	1.84	-95.23	25.68	-13.00	-50.24	Horizontal
2	5189.00	-57.21	RMS		32.50	-21.71	2.01	-95.23	25.22	-13.00	-44.21	Horizontal
3	6918.00	-56.48	RMS		36.04	-21.58	1.45	-95.23	22.84	-13.00	-43.48	Horizontal

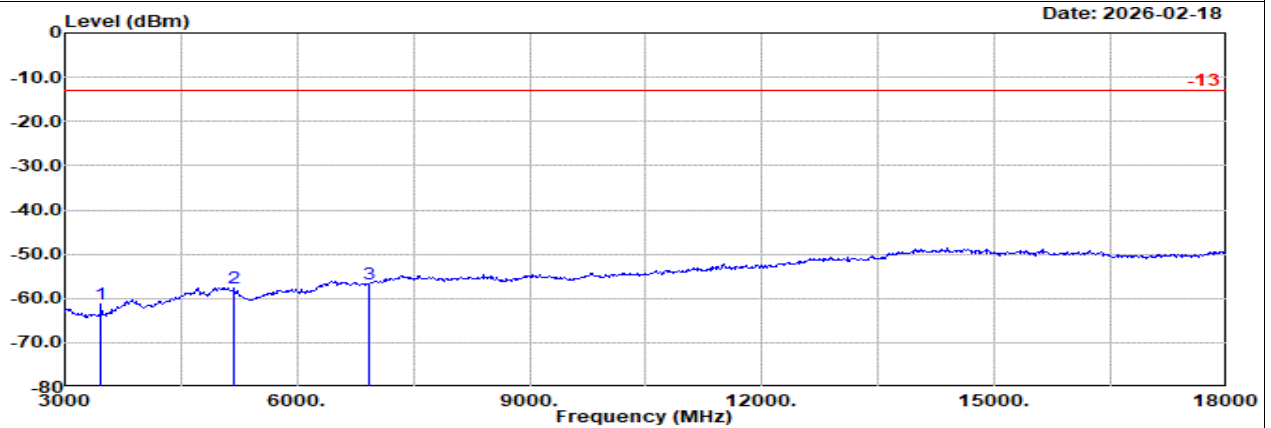

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 35M Ch349000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3460.00	-61.40	RMS		28.46	-23.99	1.84	-95.23	27.52	-13.00	-48.40	Vertical
2	5189.00	-57.80	RMS		32.50	-21.71	2.01	-95.23	24.63	-13.00	-44.80	Vertical
3	6918.00	-56.79	RMS		36.04	-21.58	1.45	-95.23	22.53	-13.00	-43.79	Vertical




Ant. 5

Part 27L Mode 1

NR SA n66 35M Ch352500 1RB1 BPSK

H

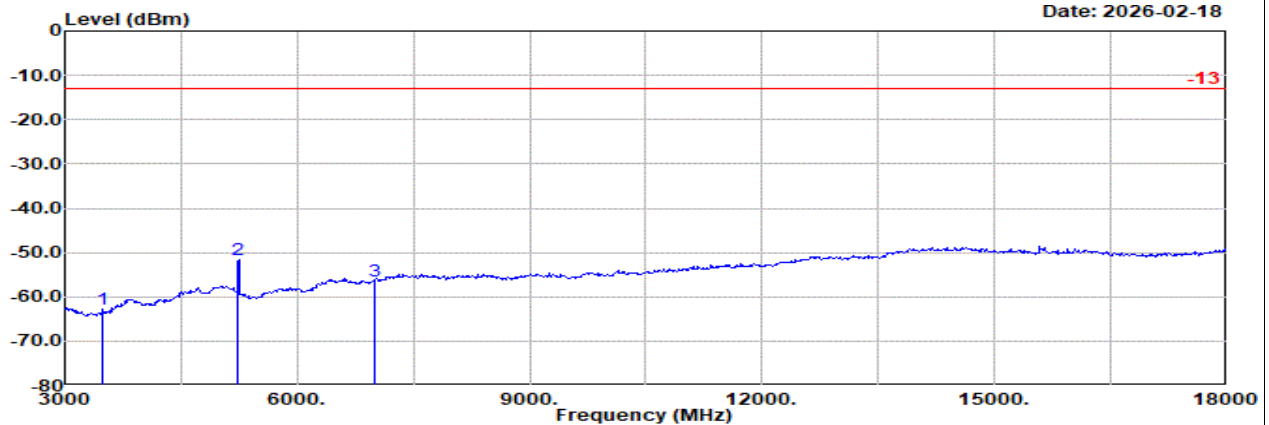


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n66 35M Ch3452500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	EIRPCF		Readin Limit		Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB	dBuV	dBm	dB	
1	3495.00	-62.87	RMS	28.67	-24.04	1.81	-95.23	25.92	-13.00	-49.87	Horizontal	
2	5241.00	-51.50	RMS	32.42	-21.73	1.92	-95.23	31.12	-13.00	-38.50	Horizontal	
3	6988.00	-56.43	RMS	36.18	-21.60	1.43	-95.23	22.79	-13.00	-43.43	Horizontal	

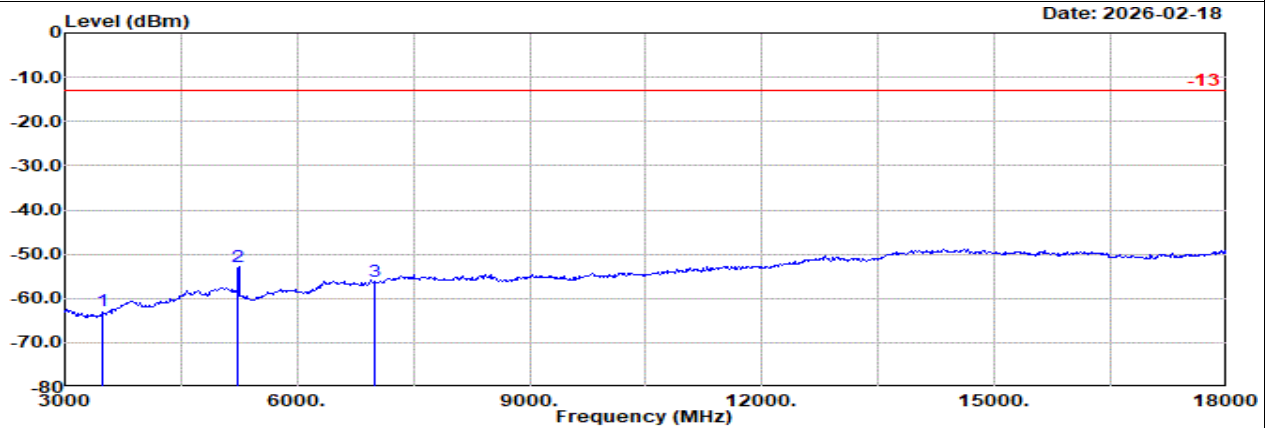

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n66 35M Ch3452500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	EIRPCF		Readin Limit		Margin Pol	
	MHz	dBm		dB/m	dB		dB	dB	dBuV	dBm	dB	
1	3495.00	-62.93	RMS	28.67	-24.04	1.81	-95.23	25.86	-13.00	-49.93	Vertical	
2	5241.00	-52.93	RMS	32.42	-21.73	1.92	-95.23	29.69	-13.00	-39.93	Vertical	
3	6988.00	-56.17	RMS	36.18	-21.60	1.43	-95.23	23.05	-13.00	-43.17	Vertical	




Ant. 8+2

Part 27L Mode 2

EN-DC B5+n66 10M + 35M Ch20525 1RB0 QPSK + Ch345500 1RB1 BPSK

L

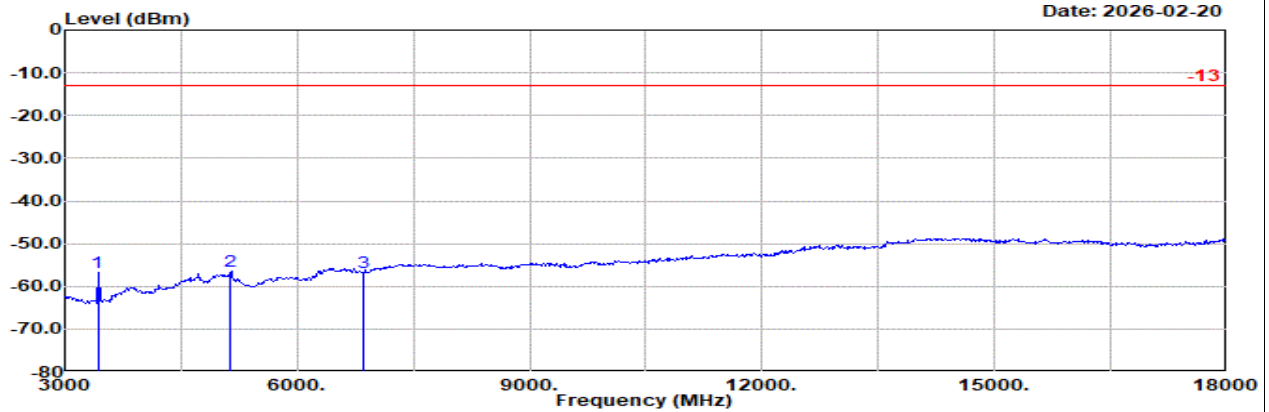


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 35M Ch345500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
					dB/m	dB							
	MHz	dBm					dB	dB	dBuV	dBm	dB		
1	3425.00	-56.90	RMS	28.35	-23.94	1.88	-95.23	32.04	-13.00	-43.90	Horizontal		
2	5136.00	-56.31	RMS	32.50	-21.67	2.09	-95.23	26.00	-13.00	-43.31	Horizontal		
3	6848.00	-56.61	RMS	36.00	-21.56	1.46	-95.23	22.72	-13.00	-43.61	Horizontal		

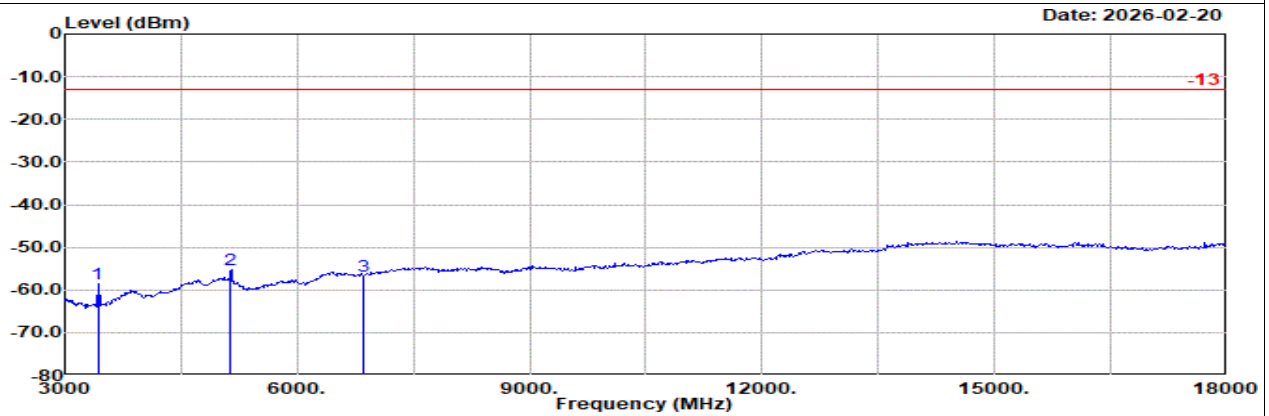

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 35M Ch345500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
					dB/m	dB							
	MHz	dBm					dB	dB	dBuV	dBm	dB		
1	3425.00	-58.48	RMS	28.35	-23.94	1.88	-95.23	30.46	-13.00	-45.48	Vertical		
2	5136.00	-55.33	RMS	32.50	-21.67	2.09	-95.23	26.98	-13.00	-42.33	Vertical		
3	6848.00	-56.62	RMS	36.00	-21.56	1.46	-95.23	22.71	-13.00	-43.62	Vertical		




Ant. 8+2

Part 27L Mode 2


EN-DC B5+n66 10M + 35M Ch20525 1RB0 QPSK + Ch349000 1RB1 BPSK

M

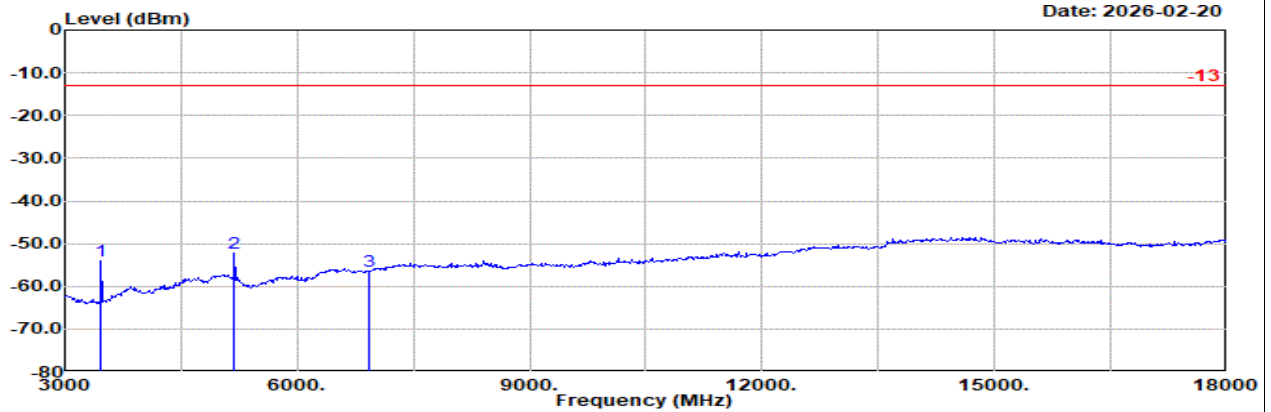

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 35M Ch349000 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l			g			
	MHz	dBm		dB/m	dB	dB		dBuV	dBm		
1	3460.00	-54.17	RMS	28.46	-23.99	1.84	-95.23	34.75	-13.00	-41.17	Horizontal
2	5189.00	-52.10	RMS	32.50	-21.71	2.01	-95.23	30.33	-13.00	-39.10	Horizontal
3	6918.00	-56.40	RMS	36.04	-21.58	1.45	-95.23	22.92	-13.00	-43.40	Horizontal

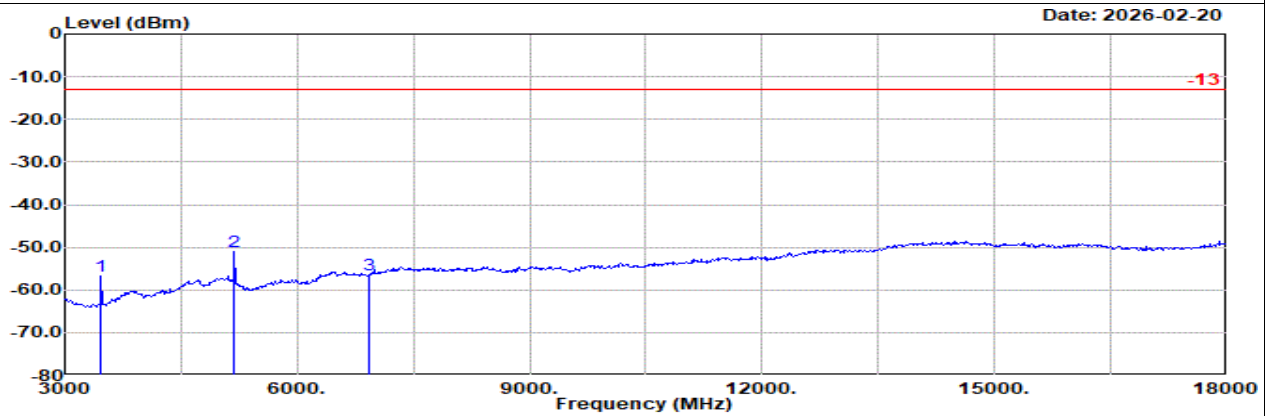

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n66 35M Ch349000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3460.00	-56.65	RMS	28.46	-23.99	1.84	-95.23	32.27	-13.00	-43.65	Vertical
2	5189.00	-50.97	RMS	32.50	-21.71	2.01	-95.23	31.46	-13.00	-37.97	Vertical
3	6918.00	-56.48	RMS	36.04	-21.58	1.45	-95.23	22.84	-13.00	-43.48	Vertical




Ant. 8+2

Part 27L Mode 2

EN-DC B5+n66 10M + 35M Ch20525 1RB0 QPSK + Ch352500 1RB1 BPSK

H

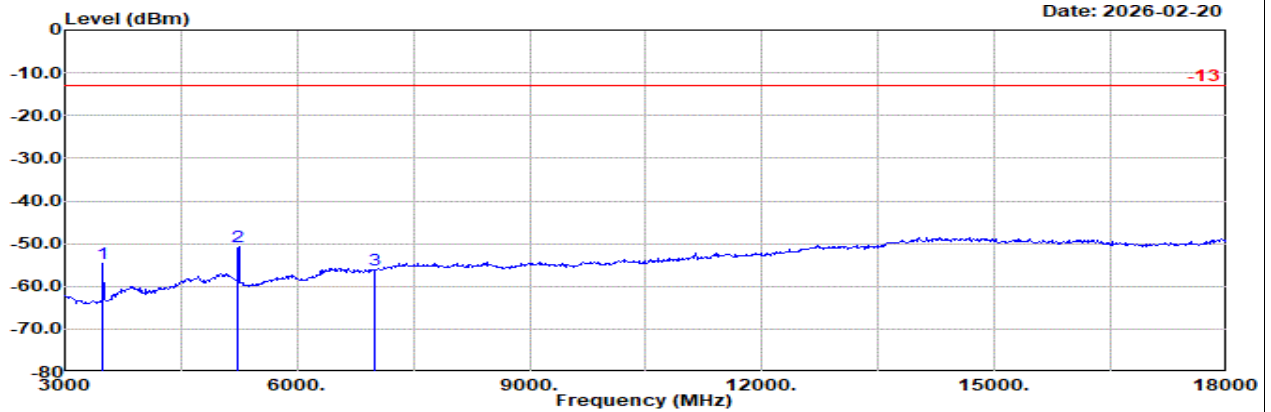


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 35M Ch352500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB		dBuV	dBm	dB	
1	3495.00	-54.53	RMS		28.67	-24.04	1.81	-95.23	34.26	-13.00	-41.53	Horizontal
2	5241.00	-50.77	RMS		32.42	-21.73	1.92	-95.23	31.85	-13.00	-37.77	Horizontal
3	6988.00	-56.03	RMS		36.18	-21.60	1.43	-95.23	23.19	-13.00	-43.03	Horizontal

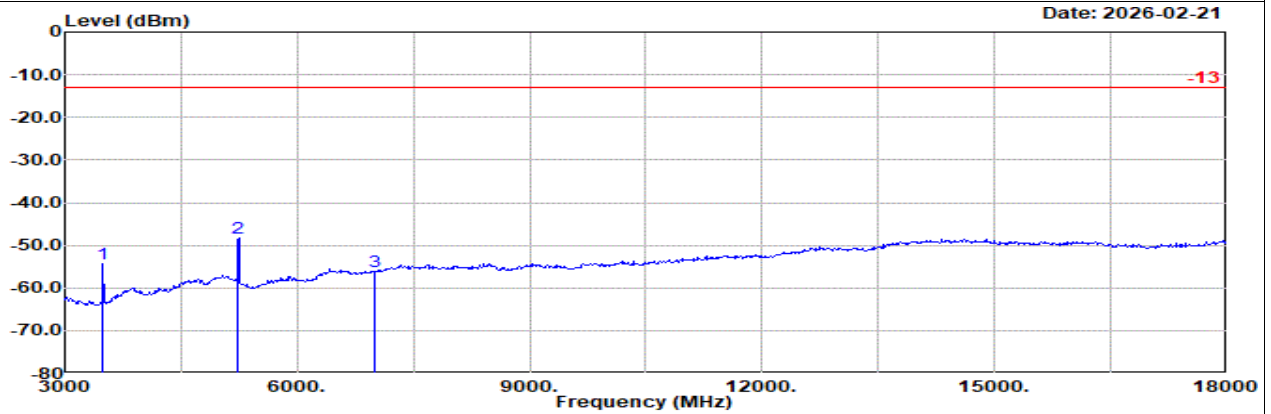

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n66 35M Ch352500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB		dBuV	dBm	dB	
1	3495.00	-54.47	RMS		28.67	-24.04	1.81	-95.23	34.32	-13.00	-41.47	Vertical
2	5241.00	-48.32	RMS		32.42	-21.73	1.92	-95.23	34.30	-13.00	-35.32	Vertical
3	6988.00	-56.15	RMS		36.18	-21.60	1.43	-95.23	23.07	-13.00	-43.15	Vertical




Ant. 8

Part 27D Mode 3

NR SA n30 5M Ch461500 1RB1 BPSK

L

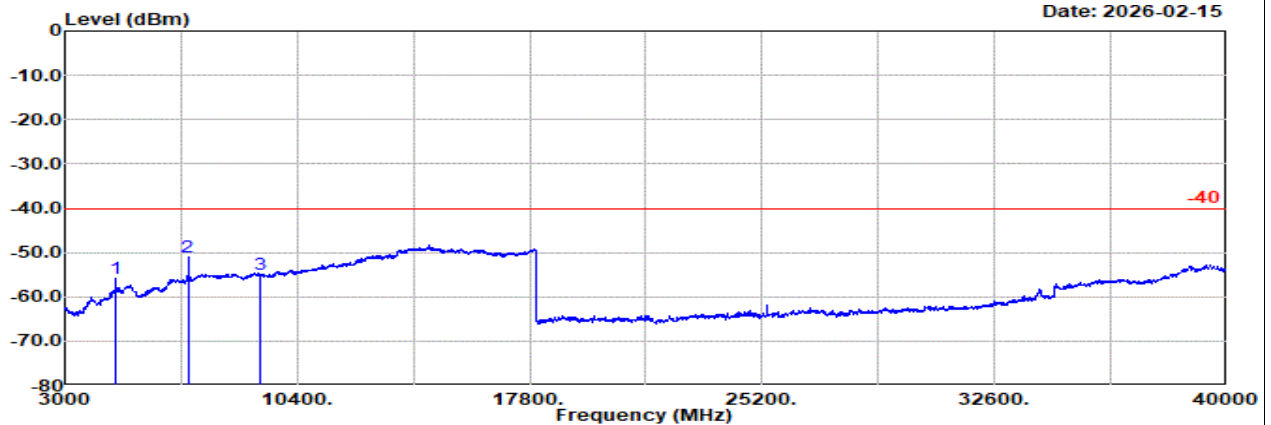


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n30 5M Ch461500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4611.00	-55.74	RMS	31.74	-22.38	2.71	-95.23	27.42	-40.00	-15.74	Horizontal	
2	6917.00	-51.09	RMS	36.03	-21.58	1.45	-95.23	28.24	-40.00	-11.09	Horizontal	
3	9222.00	-54.93	RMS	36.90	-21.80	1.57	-95.23	23.63	-40.00	-14.93	Horizontal	

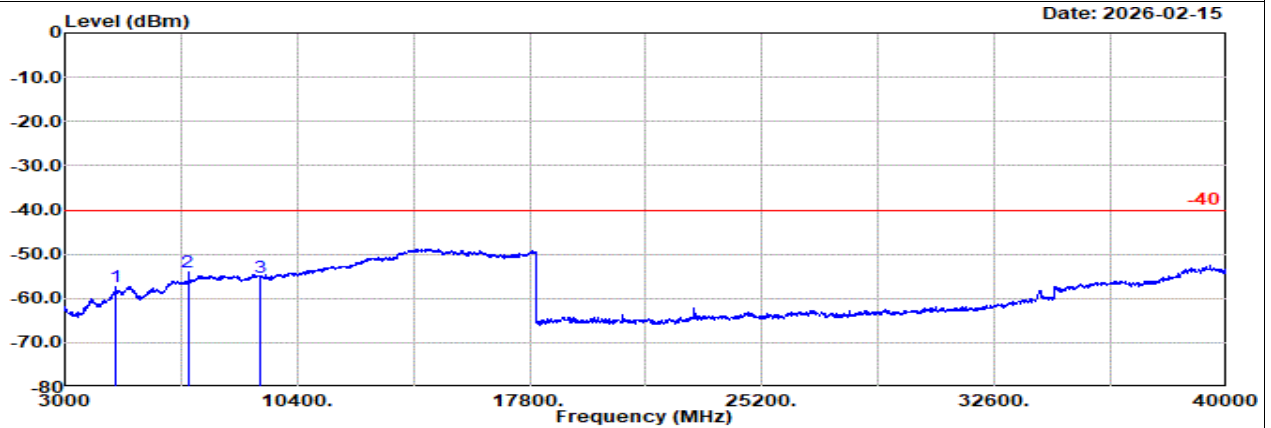

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n30 5M Ch461500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4611.00	-57.39	RMS	31.74	-22.38	2.71	-95.23	25.77	-40.00	-17.39	Vertical	
2	6917.00	-54.01	RMS	36.03	-21.58	1.45	-95.23	25.32	-40.00	-14.01	Vertical	
3	9222.00	-55.18	RMS	36.90	-21.80	1.57	-95.23	23.38	-40.00	-15.18	Vertical	




Ant. 8

Part 27D Mode 3

NR SA n30 5M Ch462000 1RB1 BPSK

M

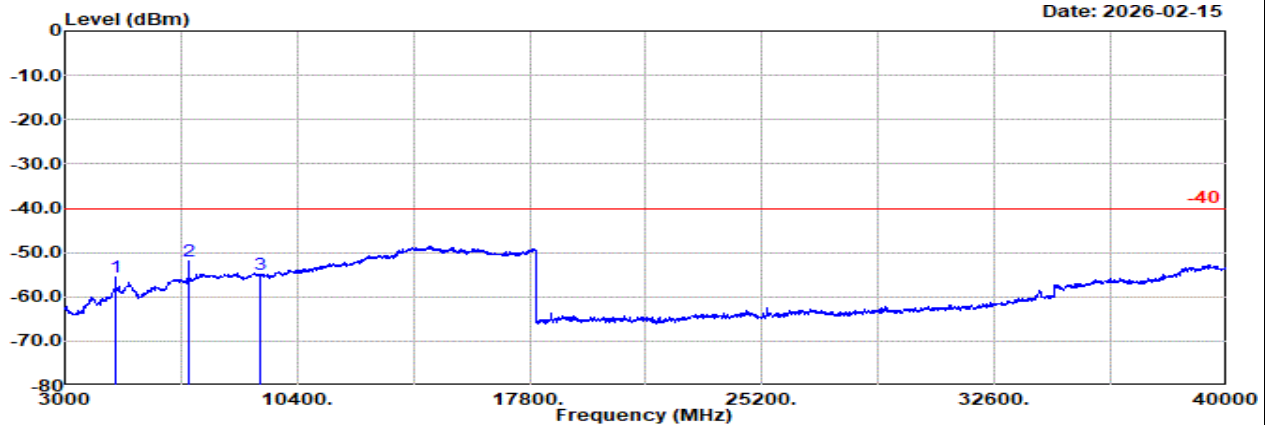


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n30 5M Ch462000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4616.00	-55.46	RMS		31.76	-22.37	2.71	-95.23	27.67	-40.00	-15.46	Horizontal
2	6924.00	-51.91	RMS		36.05	-21.58	1.45	-95.23	27.40	-40.00	-11.91	Horizontal
3	9232.00	-54.95	RMS		36.90	-21.81	1.57	-95.23	23.62	-40.00	-14.95	Horizontal

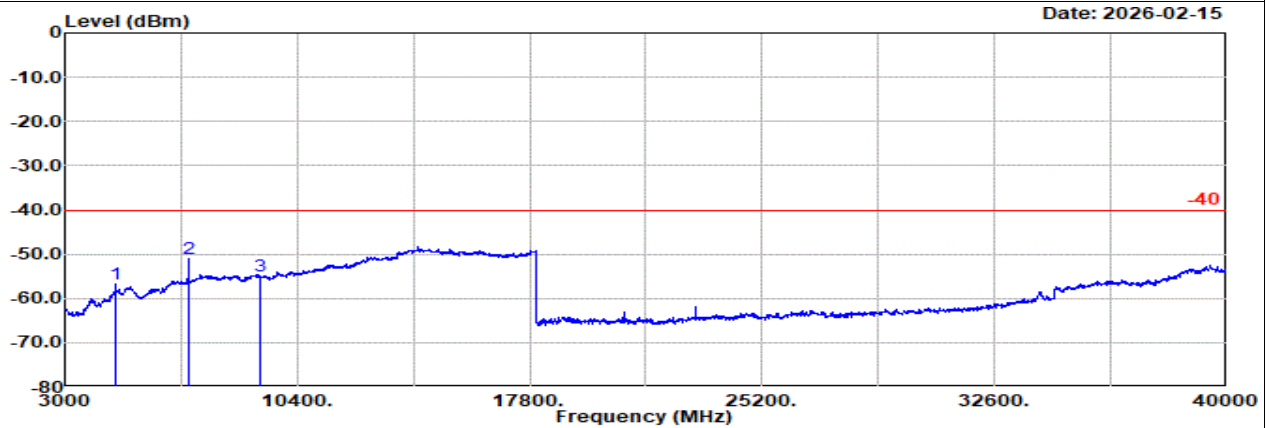

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n30 5M Ch462000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4616.00	-56.86	RMS		31.76	-22.37	2.71	-95.23	26.27	-40.00	-16.86	Vertical
2	6924.00	-51.15	RMS		36.05	-21.58	1.45	-95.23	28.16	-40.00	-11.15	Vertical
3	9232.00	-54.85	RMS		36.90	-21.81	1.57	-95.23	23.72	-40.00	-14.85	Vertical




Ant. 8

Part 27D Mode 3

NR SA n30 5M Ch462500 1RB1 BPSK

H

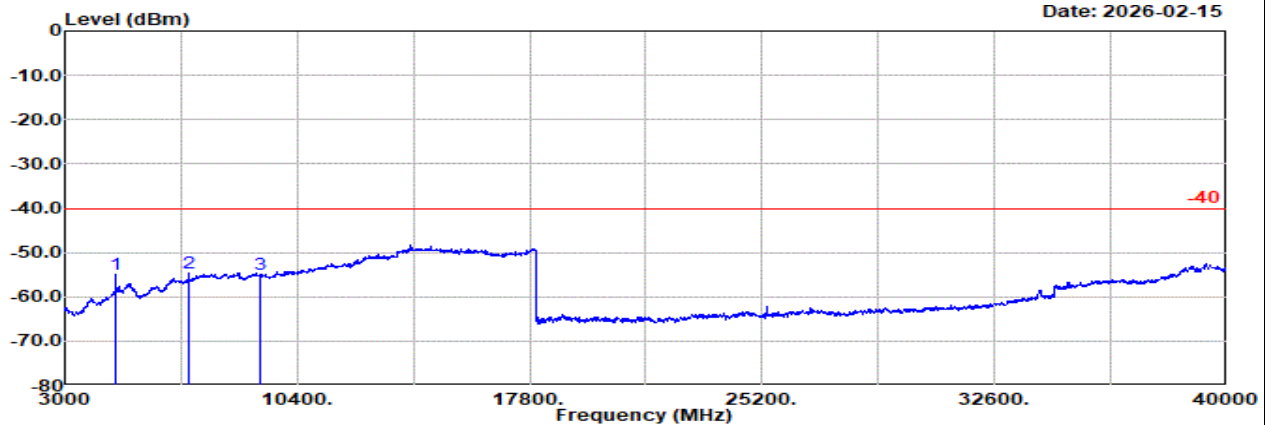


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n30 5M Ch462500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4621.00	-54.85	RMS	31.78	-22.36	2.70	-95.23	28.26	-40.00	-14.85	Horizontal	
2	6932.00	-54.64	RMS	36.06	-21.58	1.44	-95.23	24.67	-40.00	-14.64	Horizontal	
3	9242.00	-54.93	RMS	36.90	-21.82	1.56	-95.23	23.66	-40.00	-14.93	Horizontal	

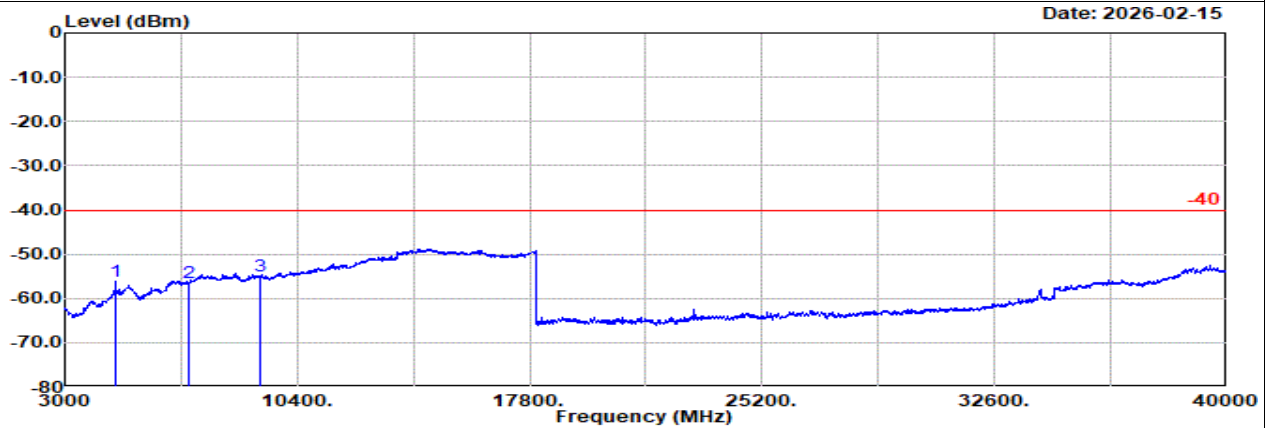

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n30 5M Ch462500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4621.00	-56.03	RMS	31.78	-22.36	2.70	-95.23	27.08	-40.00	-16.03	Vertical	
2	6932.00	-56.47	RMS	36.06	-21.58	1.44	-95.23	22.84	-40.00	-16.47	Vertical	
3	9242.00	-54.87	RMS	36.90	-21.82	1.56	-95.23	23.72	-40.00	-14.87	Vertical	




Ant. 8

Part 27D Mode 4

NR SA n30 10M Ch462000 1RB1 BPSK

M

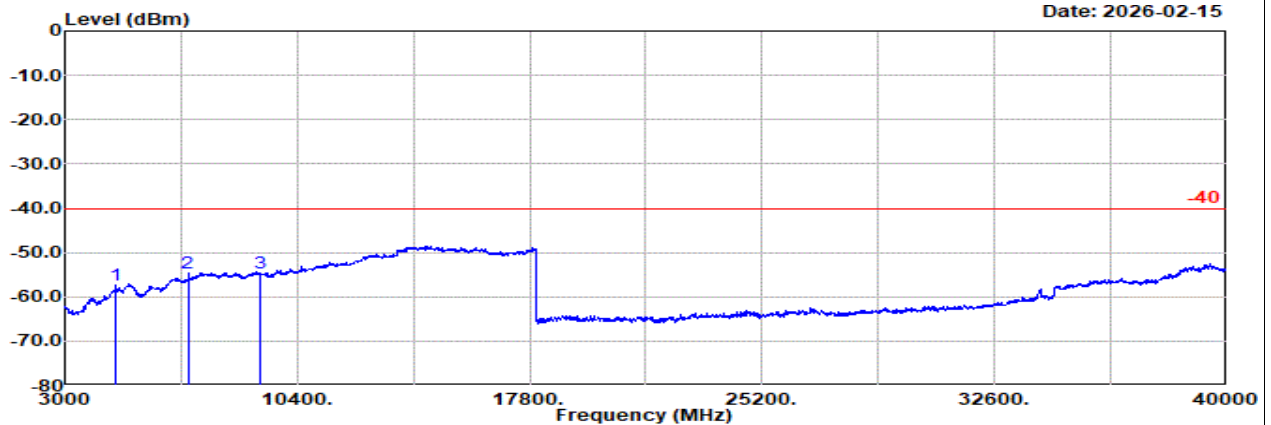


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n30 10M Ch462000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	4612.00	-57.33	RMS	31.75	-22.38	2.71	-95.23	25.82	-40.00	-17.33	Horizontal	
2	6917.00	-54.76	RMS	36.03	-21.58	1.45	-95.23	24.57	-40.00	-14.76	Horizontal	
3	9223.00	-54.74	RMS	36.90	-21.80	1.57	-95.23	23.82	-40.00	-14.74	Horizontal	

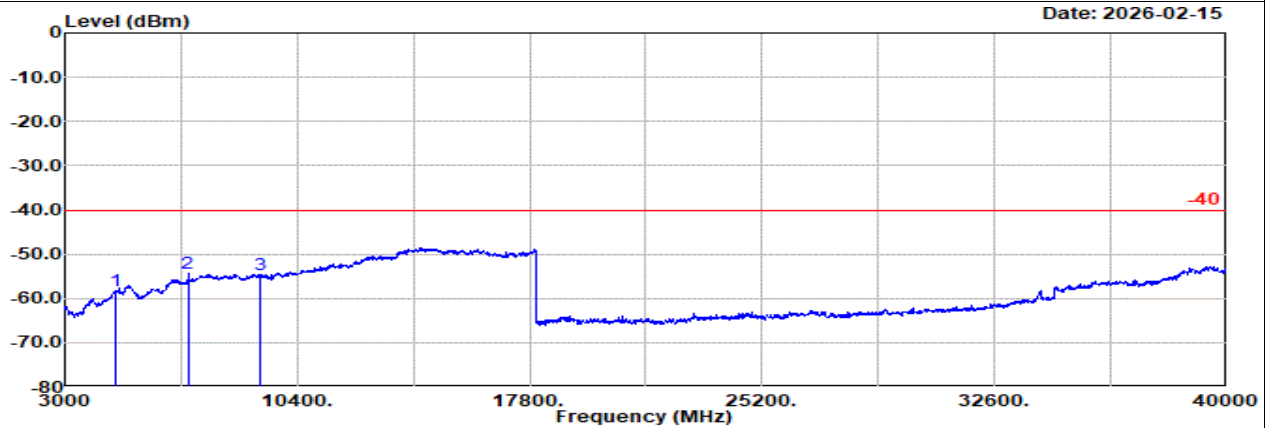

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n30 10M Ch462000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	4612.00	-58.29	RMS	31.75	-22.38	2.71	-95.23	24.86	-40.00	-18.29	Vertical	
2	6917.00	-54.25	RMS	36.03	-21.58	1.45	-95.23	25.08	-40.00	-14.25	Vertical	
3	9223.00	-54.74	RMS	36.90	-21.80	1.57	-95.23	23.82	-40.00	-14.74	Vertical	




Ant. 8

Part 27D Mode 5

NR SA n40 10M Ch462000 1RB1 BPSK

M

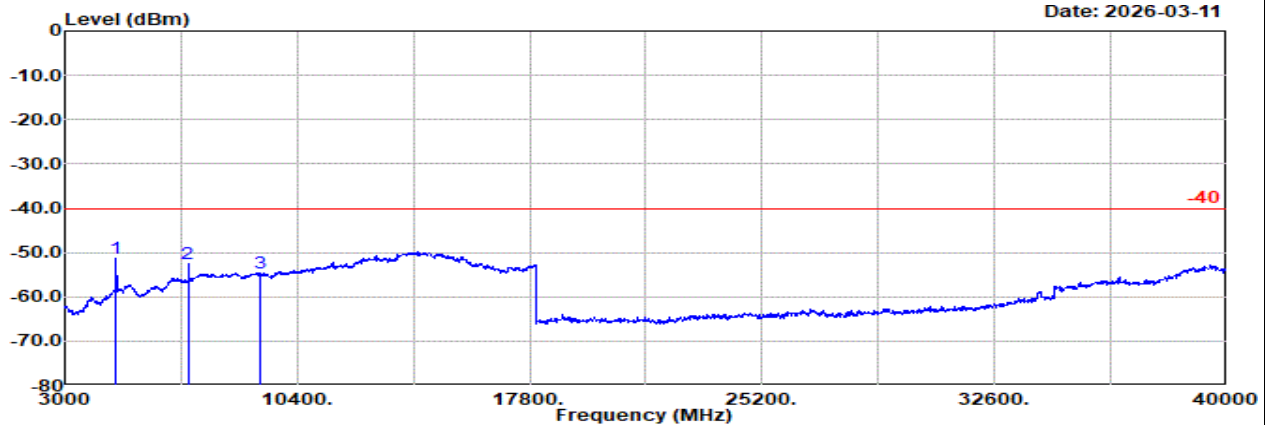


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_250702 Horizontal

: SA n40 10M Ch462000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		Factor	1			g			
1	4612.00	-51.27	RMS	31.75	-22.38	2.71	-95.23	31.88	-40.00	-11.27	Horizontal
2	6917.00	-52.61	RMS	36.03	-21.58	1.45	-95.23	26.72	-40.00	-12.61	Horizontal
3	9223.00	-54.64	RMS	36.90	-21.80	1.57	-95.23	23.92	-40.00	-14.64	Horizontal

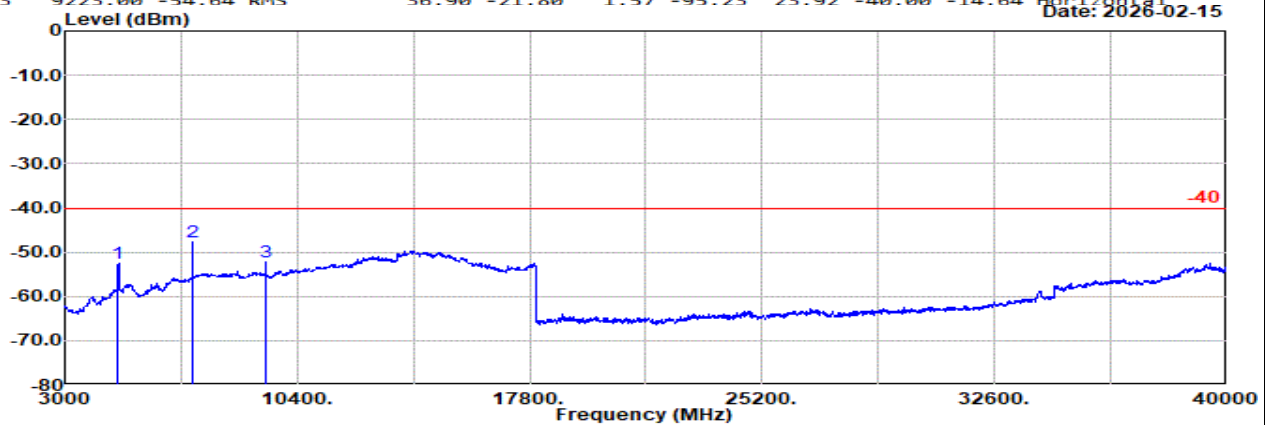


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n40 10M Ch471000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		Factor	1			g			
1	4702.00	-52.49	RMS	32.00	-22.19	2.58	-95.23	30.35	-40.00	-12.49	Horizontal
2	7052.00	-47.55	RMS	36.10	-21.55	1.41	-95.23	31.72	-40.00	-7.55	Horizontal
3	9403.00	-52.27	RMS	36.90	-21.96	1.54	-95.23	26.48	-40.00	-12.27	Horizontal

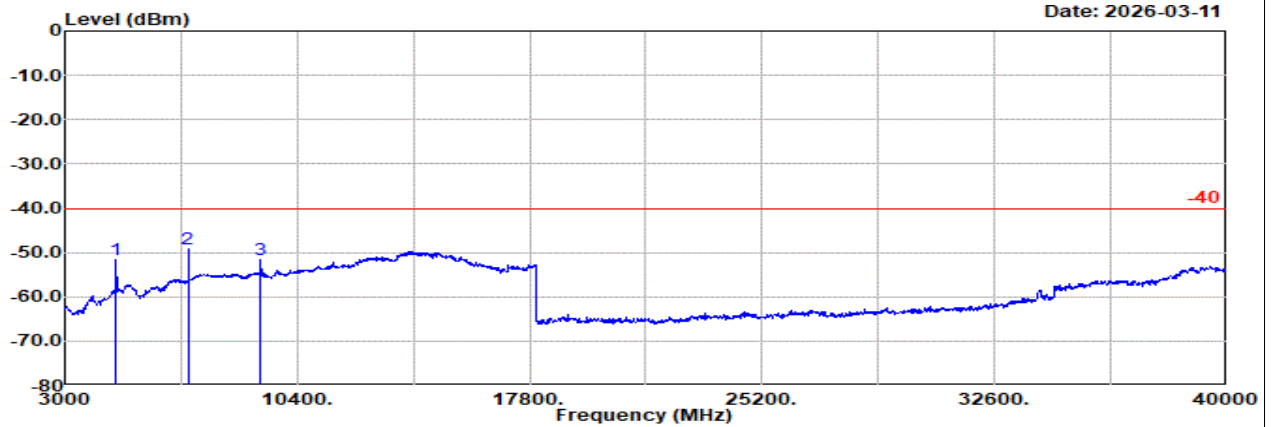


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_250702 Vertical

: SA n40 10M Ch462000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	4612.00	-51.72	RMS	31.75	-22.38	2.71	-95.23	31.43	-40.00	-11.72	Vertical	
2	6917.00	-49.30	RMS	36.03	-21.58	1.45	-95.23	30.03	-40.00	-9.30	Vertical	
3	9223.00	-51.59	RMS	36.90	-21.80	1.57	-95.23	26.97	-40.00	-11.59	Vertical	

Date: 2026-02-15

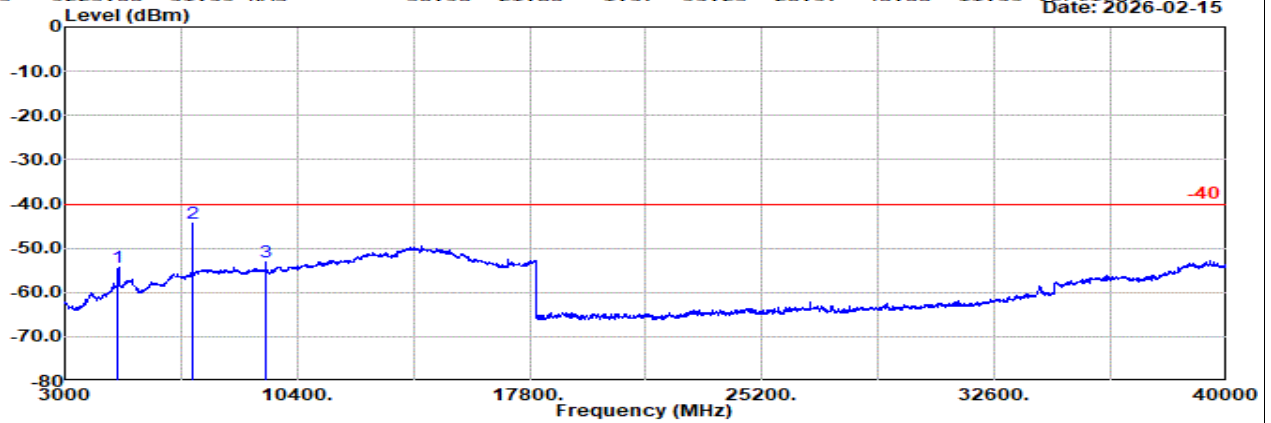

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n40 10M Ch471000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	4702.00	-54.30	RMS	32.00	-22.19	2.58	-95.23	28.54	-40.00	-14.30	Vertical	
2	7052.00	-44.43	RMS	36.10	-21.55	1.41	-95.23	34.84	-40.00	-4.43	Vertical	
3	9403.00	-53.08	RMS	36.90	-21.96	1.54	-95.23	25.67	-40.00	-13.08	Vertical	




Ant. 8

Part 27F Mode 6

NR SA n13 5M Ch155900 1RB1 BPSK

L

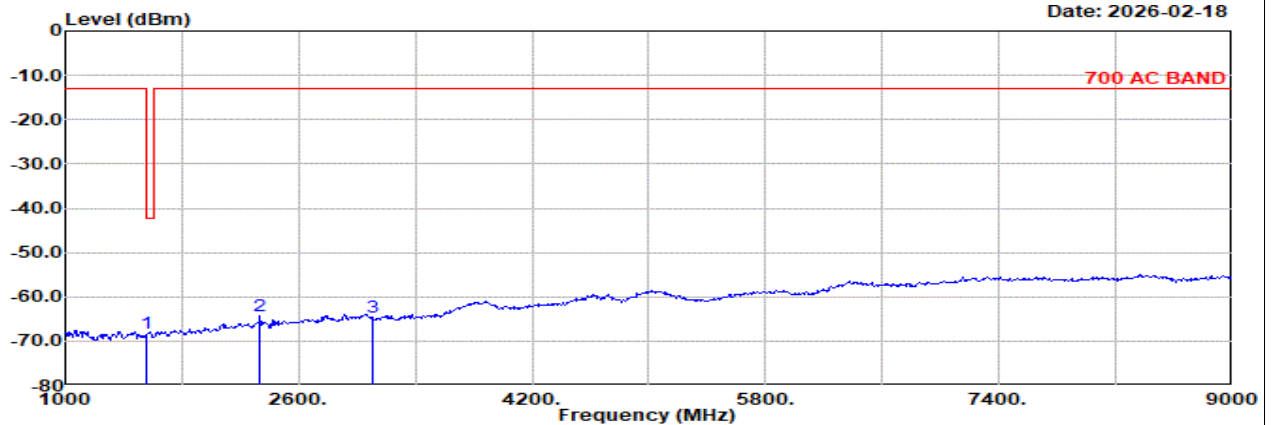


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n13 5M Ch155900 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1		dB	dB		dBuV	dBm	dB	
1	1555.00	-68.34	RMS	24.40	-25.22	1.05	-95.23	26.66	-13.00	-55.34	Horizontal		
2	2333.00	-64.32	RMS	26.87	-24.40	0.91	-95.23	27.53	-13.00	-51.32	Horizontal		
3	3110.00	-64.56	RMS	28.00	-23.69	0.98	-95.23	25.38	-13.00	-51.56	Horizontal		

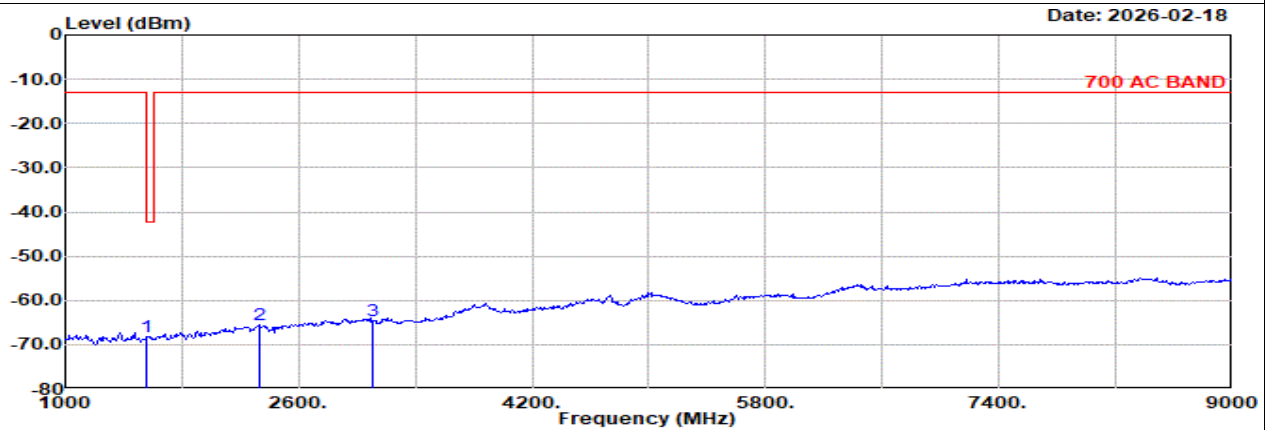

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n13 5M Ch155900 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1		dB	dB		dBuV	dBm	dB	
1	1555.00	-68.23	RMS	24.40	-25.22	1.05	-95.23	26.77	-13.00	-55.23	Vertical		
2	2333.00	-65.49	RMS	26.87	-24.40	0.91	-95.23	26.36	-13.00	-52.49	Vertical		
3	3110.00	-64.51	RMS	28.00	-23.69	0.98	-95.23	25.43	-13.00	-51.51	Vertical		




Ant. 8

Part 27F Mode 6

NR SA n13 5M Ch156400 1RB1 BPSK

M

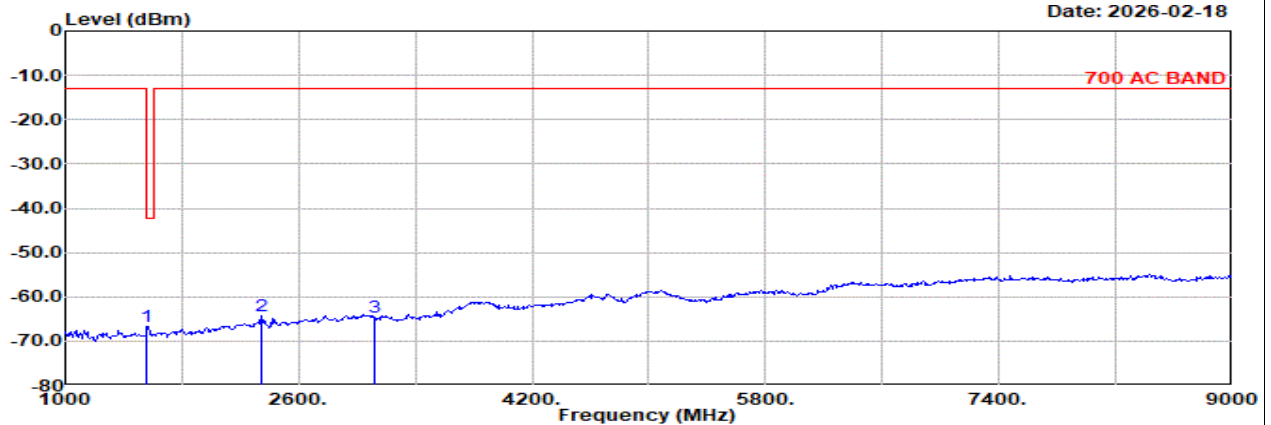


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n13 5M Ch156400 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1560.00	-66.62	RMS		24.40	-25.21	1.05	-95.23	28.37	-42.15	-24.47	Horizontal
2	2340.00	-64.41	RMS		26.80	-24.39	0.91	-95.23	27.50	-13.00	-51.41	Horizontal
3	3120.00	-64.47	RMS		28.00	-23.70	0.99	-95.23	25.47	-13.00	-51.47	Horizontal

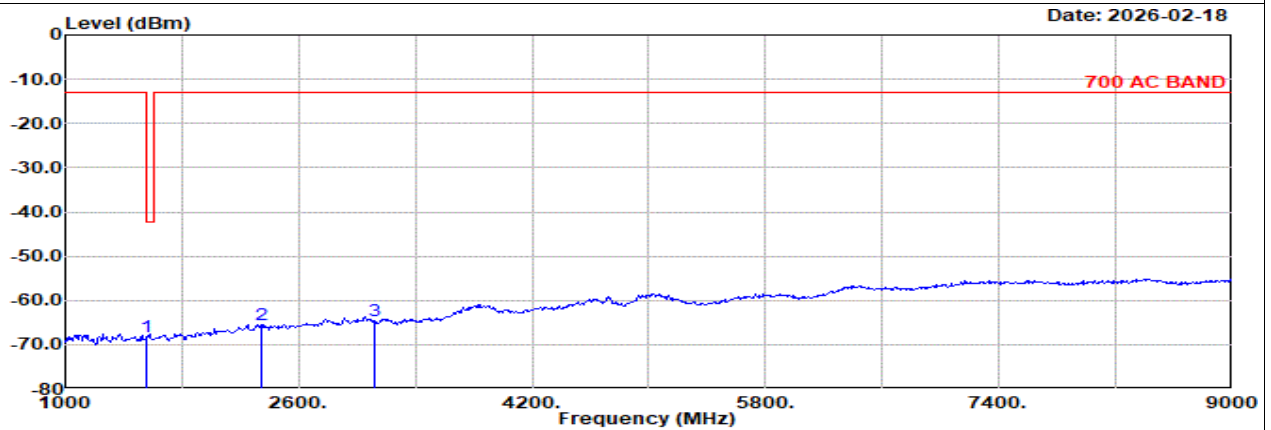

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n13 5M Ch156400 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1560.00	-68.18	RMS		24.40	-25.21	1.05	-95.23	26.81	-42.15	-26.03	Vertical
2	2340.00	-65.54	RMS		26.80	-24.39	0.91	-95.23	26.37	-13.00	-52.54	Vertical
3	3120.00	-64.61	RMS		28.00	-23.70	0.99	-95.23	25.33	-13.00	-51.61	Vertical




Ant. 8

Part 27F Mode 6

NR SA n13 5M Ch156900 1RB1 BPSK

H

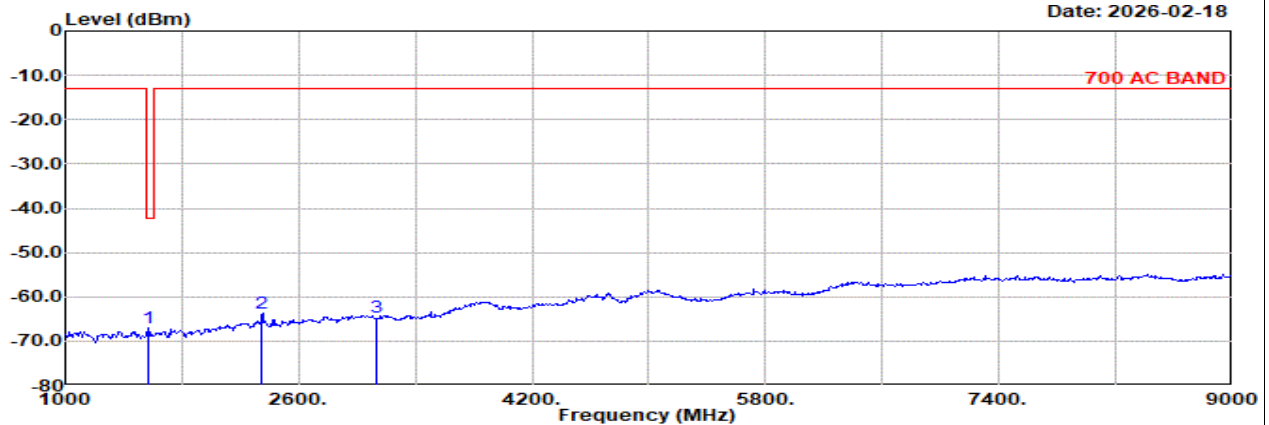


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n13 5M Ch156900 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1		dB	dB		dBuV	dBm	dB	
1	1565.00	-67.02	RMS	24.45	-25.21	1.05	-95.23	27.92	-42.15	-24.87	Horizontal		
2	2348.00	-63.82	RMS	26.80	-24.38	0.91	-95.23	28.08	-13.00	-50.82	Horizontal		
3	3130.00	-64.73	RMS	28.00	-23.71	1.00	-95.23	25.21	-13.00	-51.73	Horizontal		

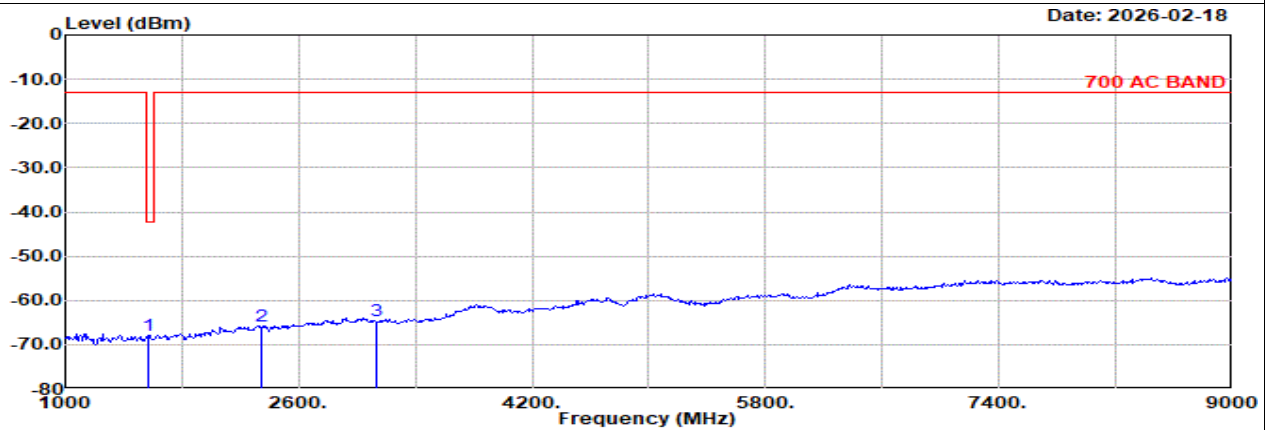

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n13 5M Ch156900 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1		dB	dB		dBuV	dBm	dB	
1	1565.00	-68.04	RMS	24.45	-25.21	1.05	-95.23	26.90	-42.15	-25.89	Vertical		
2	2348.00	-65.72	RMS	26.80	-24.38	0.91	-95.23	26.18	-13.00	-52.72	Vertical		
3	3130.00	-64.69	RMS	28.00	-23.71	1.00	-95.23	25.25	-13.00	-51.69	Vertical		




Ant. 8

Part 27F Mode 7

NR SA n13 10M Ch156400 1RB1 BPSK

M

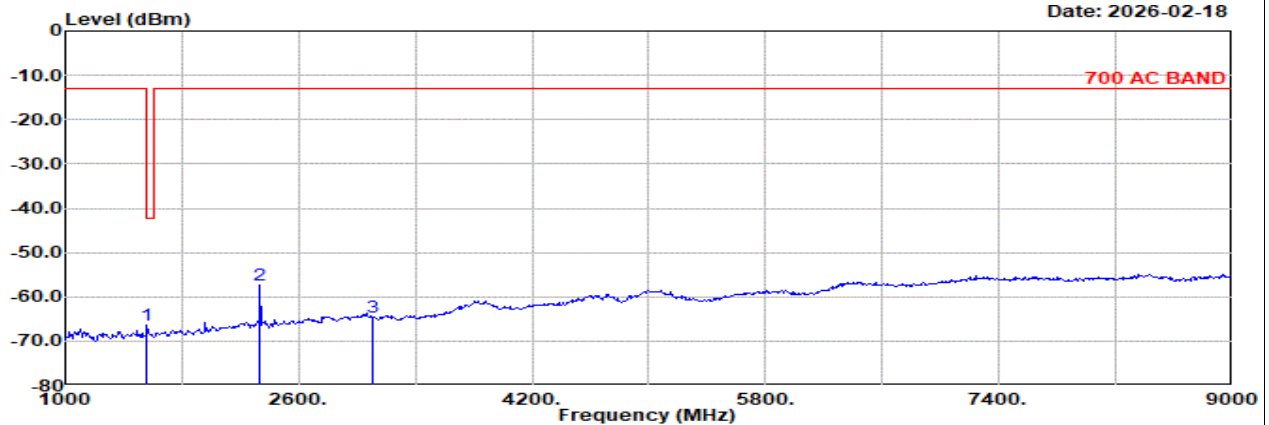


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n13 10M Ch156400 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBm	dB		
1	1556.00	-66.52	RMS	24.40	-25.22	1.05	-95.23	28.48	-13.00	-53.52	Horizontal
2	2333.00	-57.49	RMS	26.87	-24.40	0.91	-95.23	34.36	-13.00	-44.49	Horizontal
3	3111.00	-64.49	RMS	28.00	-23.69	0.98	-95.23	25.45	-13.00	-51.49	Horizontal

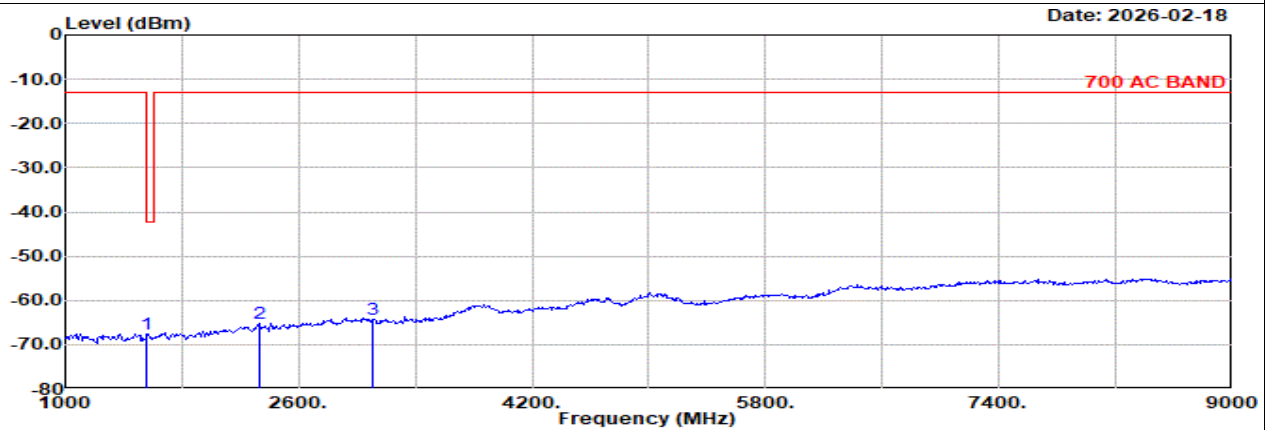

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n13 10M Ch156400 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBm	dB		
1	1556.00	-67.70	RMS	24.40	-25.22	1.05	-95.23	27.30	-13.00	-54.70	Vertical
2	2333.00	-65.29	RMS	26.87	-24.40	0.91	-95.23	26.56	-13.00	-52.29	Vertical
3	3111.00	-64.38	RMS	28.00	-23.69	0.98	-95.23	25.56	-13.00	-51.38	Vertical




Ant. 8

Part 27H Mode 8

NR SA n12 15M Ch141300 1RB1 BPSK

L

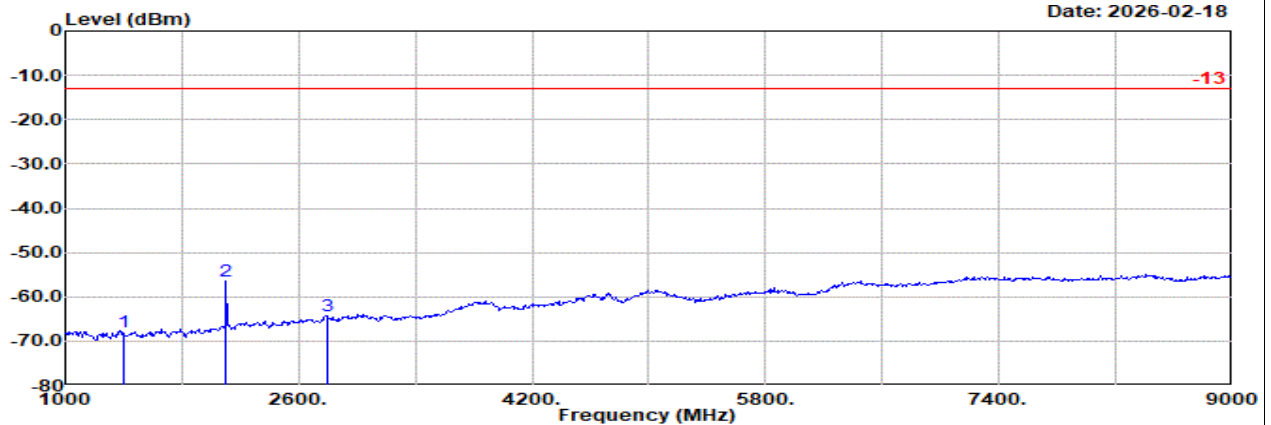


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1400.00	-68.05	RMS	24.40	-25.44	0.97	-95.23	27.25	-13.00	-55.05	Horizontal
2	2100.00	-56.42	RMS	26.30	-24.71	0.85	-95.23	36.38	-13.00	-43.42	Horizontal
3	2800.00	-64.21	RMS	27.70	-23.82	1.03	-95.23	26.11	-13.00	-51.21	Horizontal

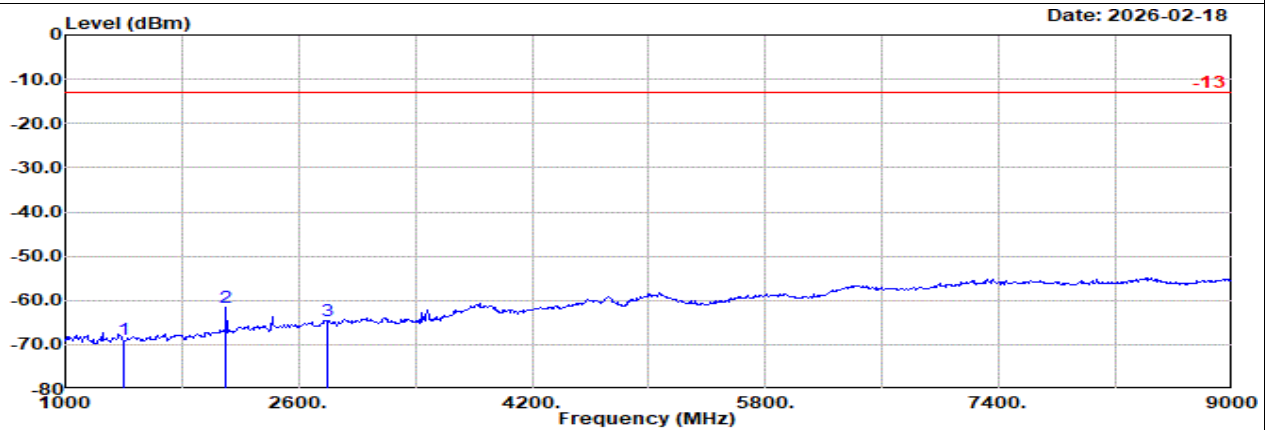

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1400.00	-68.79	RMS	24.40	-25.44	0.97	-95.23	26.51	-13.00	-55.79	Vertical
2	2100.00	-61.72	RMS	26.30	-24.71	0.85	-95.23	31.08	-13.00	-48.72	Vertical
3	2800.00	-64.62	RMS	27.70	-23.82	1.03	-95.23	25.70	-13.00	-51.62	Vertical




Ant. 8

Part 27H Mode 8

NR SA n12 15M Ch141500 1RB1 BPSK

M

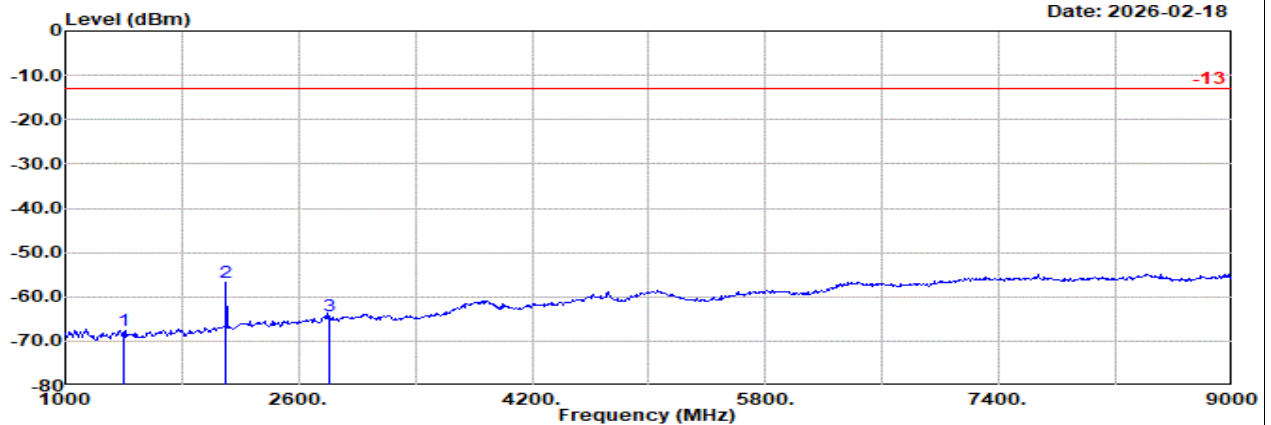


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n12 15M Ch141500 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1402.00	-67.65	RMS	24.42	-25.44	0.97	-95.23	27.63	-13.00	-54.65	Horizontal
2	2103.00	-56.74	RMS	26.30	-24.71	0.85	-95.23	36.05	-13.00	-43.74	Horizontal
3	2804.00	-64.43	RMS	27.70	-23.81	1.03	-95.23	25.88	-13.00	-51.43	Horizontal

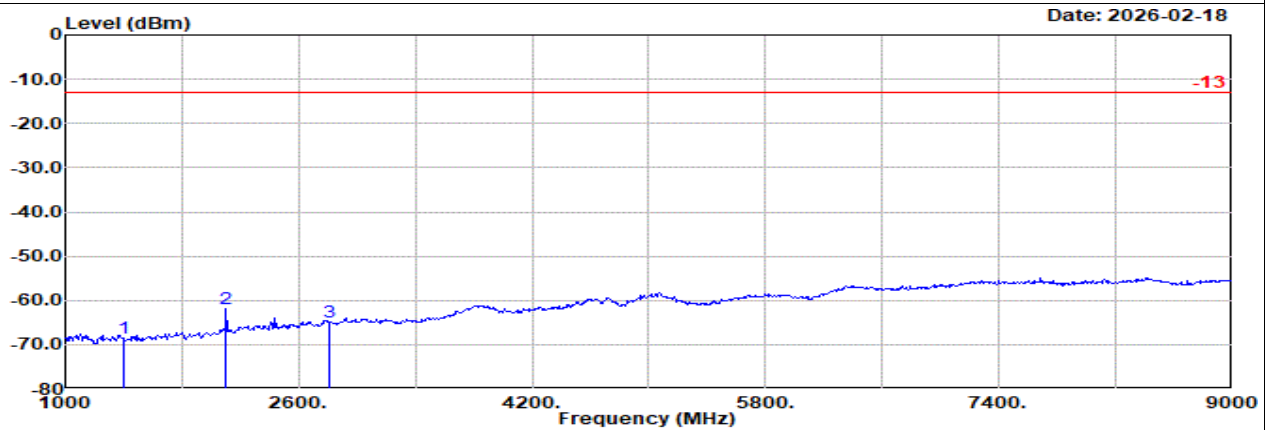

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n12 15M Ch141500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB			dB	dBuV		
1	1402.00	-68.50	RMS	24.42	-25.44	0.97	-95.23	26.78	-13.00	-55.50	Vertical
2	2103.00	-61.84	RMS	26.30	-24.71	0.85	-95.23	30.95	-13.00	-48.84	Vertical
3	2804.00	-64.85	RMS	27.70	-23.81	1.03	-95.23	25.46	-13.00	-51.85	Vertical




Ant. 8

Part 27H Mode 8

NR SA n12 15M Ch141700 1RB1 BPSK

H

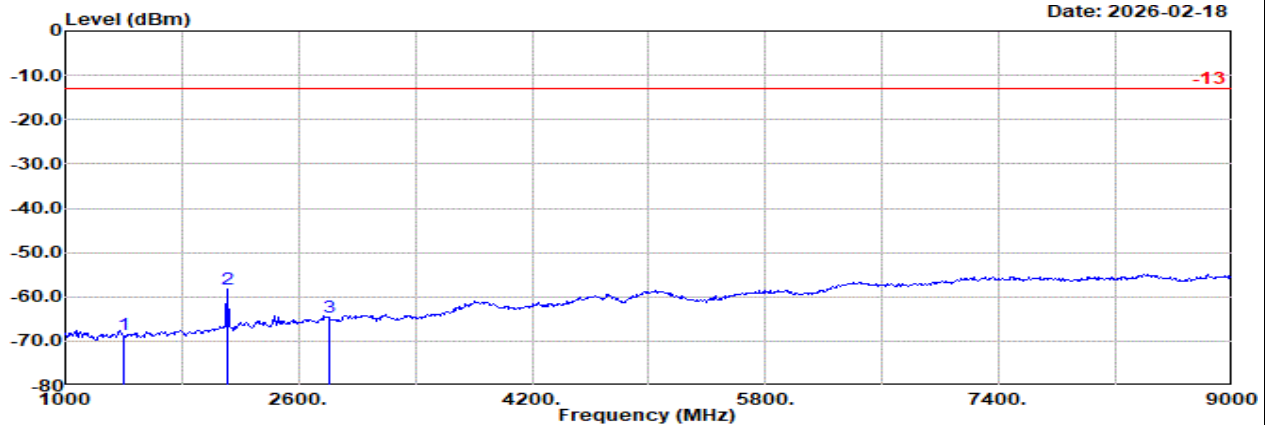


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n12 15M Ch141700 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1404.00	-68.44	RMS	24.44	-25.43	0.97	-95.23	26.81	-13.00	-55.44	Horizontal
2	2106.00	-58.30	RMS	26.30	-24.70	0.85	-95.23	34.48	-13.00	-45.30	Horizontal
3	2808.00	-64.53	RMS	27.70	-23.81	1.02	-95.23	25.79	-13.00	-51.53	Horizontal

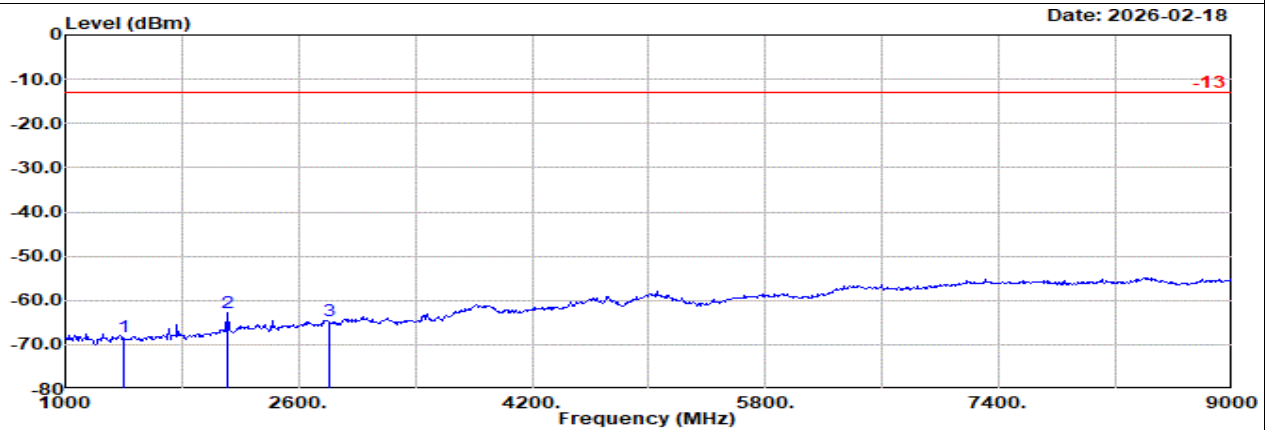

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n12 15M Ch141700 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB			dB	dBuV		
1	1404.00	-68.38	RMS	24.44	-25.43	0.97	-95.23	26.87	-13.00	-55.38	Vertical
2	2106.00	-62.87	RMS	26.30	-24.70	0.85	-95.23	29.91	-13.00	-49.87	Vertical
3	2808.00	-64.67	RMS	27.70	-23.81	1.02	-95.23	25.65	-13.00	-51.67	Vertical




Ant. 2+8

Part 27H Mode 9


EN-DC B2+n12 10M + 15M Ch18900 1RB0 QPSK + Ch141300 1RB1 BPSK

L

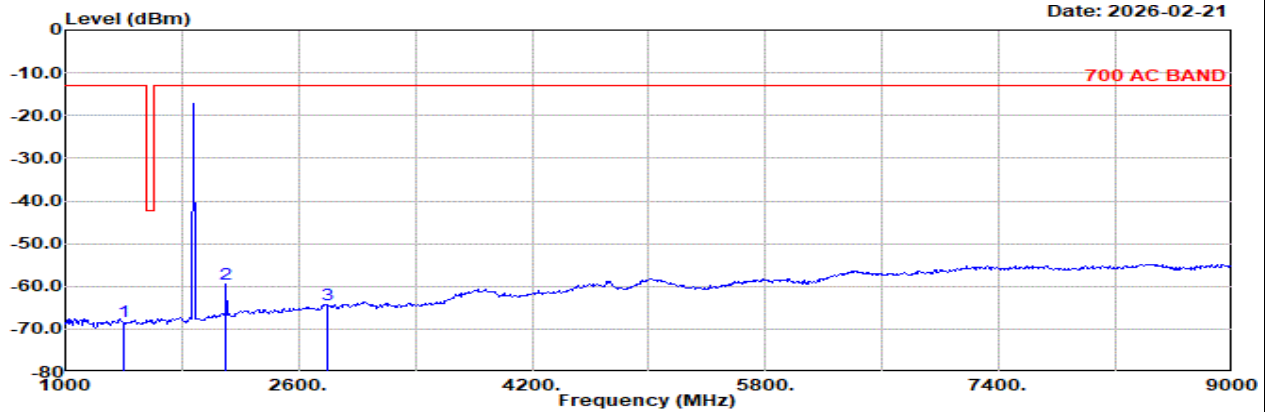

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1400.00	-68.23	RMS		24.40	-25.44	0.97	-95.23	27.07	-13.00	-55.23	Horizontal
2	2100.00	-59.47	RMS		26.30	-24.71	0.85	-95.23	33.33	-13.00	-46.47	Horizontal
3	2800.00	-64.38	RMS		27.70	-23.82	1.03	-95.23	25.94	-13.00	-51.38	Horizontal

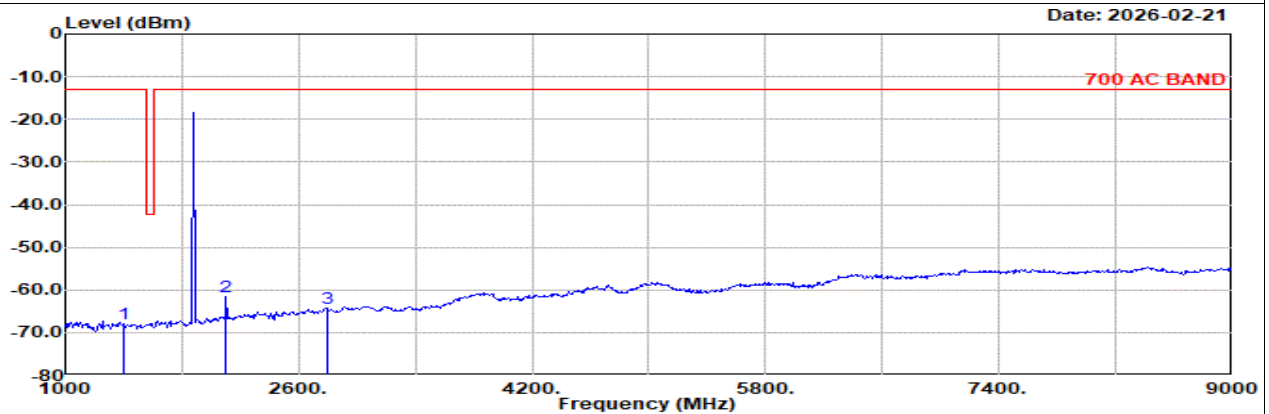

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n12 15M Ch141300 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1400.00	-67.86	RMS		24.40	-25.44	0.97	-95.23	27.44	-13.00	-54.86	Vertical
2	2100.00	-61.44	RMS		26.30	-24.71	0.85	-95.23	31.36	-13.00	-48.44	Vertical
3	2800.00	-64.41	RMS		27.70	-23.82	1.03	-95.23	25.91	-13.00	-51.41	Vertical




Ant. 2+8

Part 27H Mode 9

EN-DC B2+n12 10M + 15M Ch18900 1RB0 QPSK + Ch141500 1RB1 BPSK

M

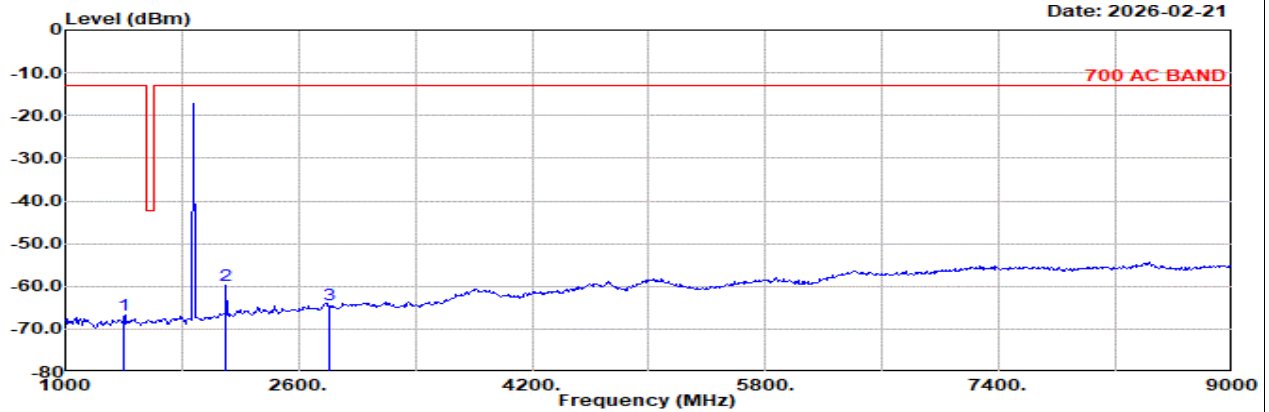


Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n12 15M Ch141500 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1402.00	-66.61	RMS		24.42	-25.44	0.97	-95.23	28.67	-13.00	-53.61	Horizontal
2	2103.00	-59.79	RMS		26.30	-24.71	0.85	-95.23	33.00	-13.00	-46.79	Horizontal
3	2804.00	-64.25	RMS		27.70	-23.81	1.03	-95.23	26.06	-13.00	-51.25	Horizontal

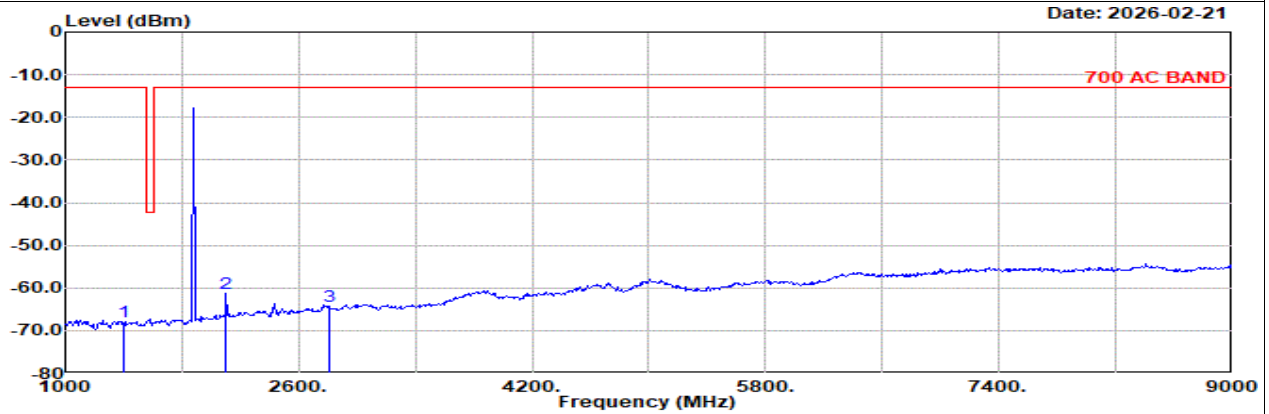

Site : 03CH21-HY

Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B2 10M Ch18900 1RB0 QPSK

: SA n12 15M Ch141500 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1402.00	-67.98	RMS		24.42	-25.44	0.97	-95.23	27.30	-13.00	-54.98	Vertical
2	2103.00	-61.37	RMS		26.30	-24.71	0.85	-95.23	31.42	-13.00	-48.37	Vertical
3	2804.00	-64.36	RMS		27.70	-23.81	1.03	-95.23	25.95	-13.00	-51.36	Vertical




Ant. 2+8

Part 27H Mode 9


EN-DC B2+n12 10M + 15M Ch18900 1RB0 QPSK + Ch141700 1RB1 BPSK

H

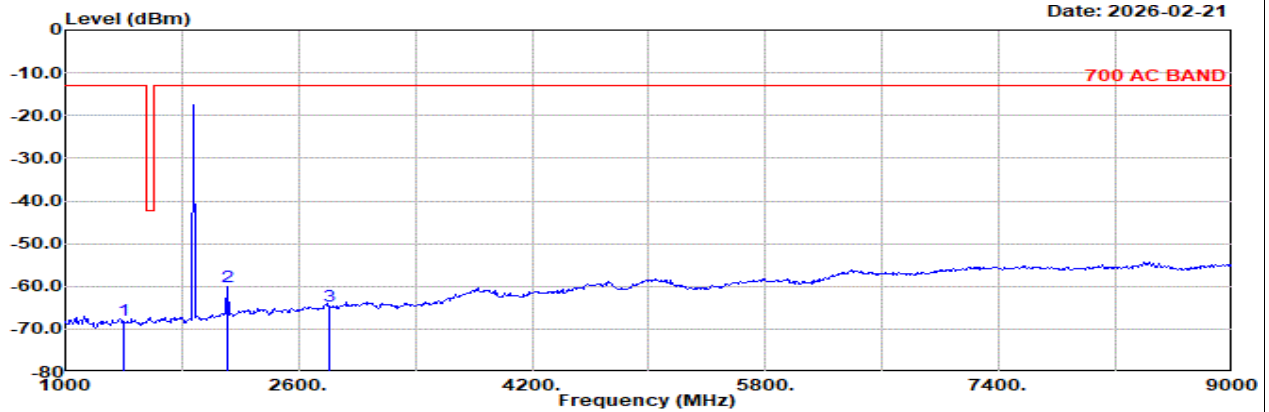

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n12 15M Ch141700 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1404.00	-67.92	RMS		24.44	-25.43	0.97	-95.23	27.33	-13.00	-54.92	Horizontal
2	2106.00	-59.94	RMS		26.30	-24.70	0.85	-95.23	32.84	-13.00	-46.94	Horizontal
3	2808.00	-64.52	RMS		27.70	-23.81	1.02	-95.23	25.80	-13.00	-51.52	Horizontal

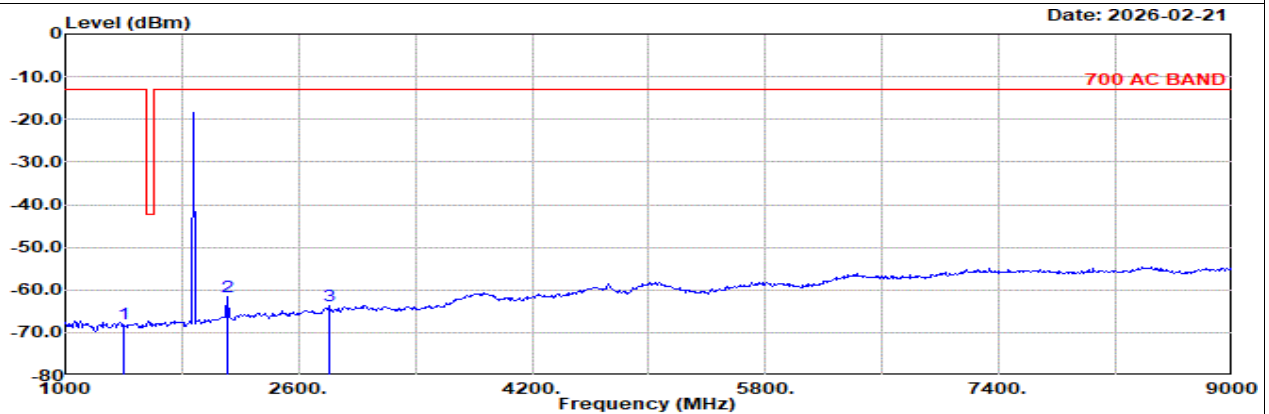

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: SA n12 15M Ch141700 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB				
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1404.00	-68.01	RMS		24.44	-25.43	0.97	-95.23	27.24	-13.00	-55.01	Vertical
2	2106.00	-61.51	RMS		26.30	-24.70	0.85	-95.23	31.27	-13.00	-48.51	Vertical
3	2808.00	-63.62	RMS		27.70	-23.81	1.02	-95.23	26.70	-13.00	-50.62	Vertical




Ant. 8

Part 27N Mode 10

NR SA n71 15M Ch134100 1RB1 BPSK

L

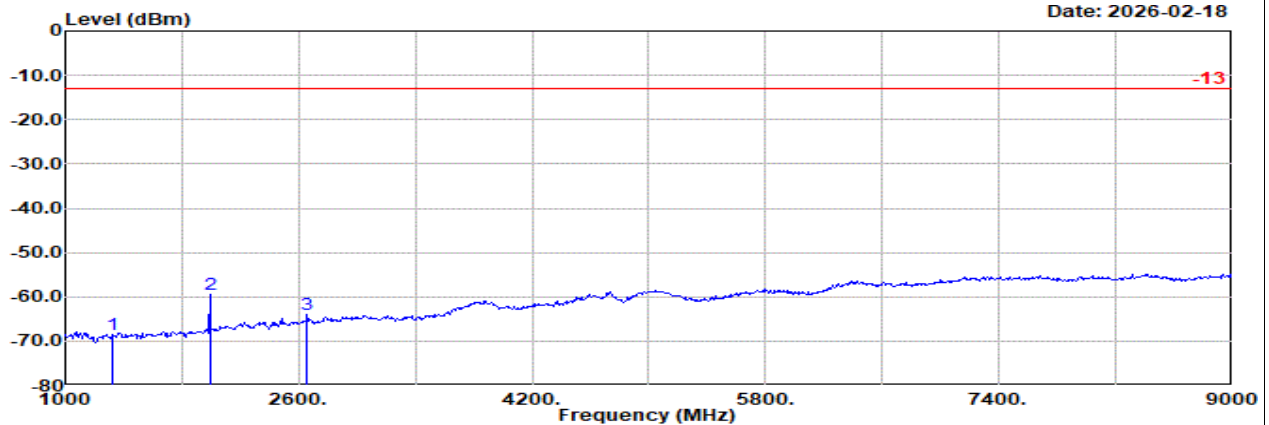


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 15M Ch134100 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit g	Margin		Pol
	MHz	dBm		Factor	dB		dB	dB			dB	dB	
1	1328.00	-68.56	RMS	24.38	-25.66	1.07	-95.23	26.88	-13.00	-55.56	Horizontal		
2	1992.00	-59.38	RMS	25.94	-24.85	0.80	-95.23	33.96	-13.00	-46.38	Horizontal		
3	2656.00	-64.08	RMS	27.24	-23.99	0.94	-95.23	26.96	-13.00	-51.08	Horizontal		

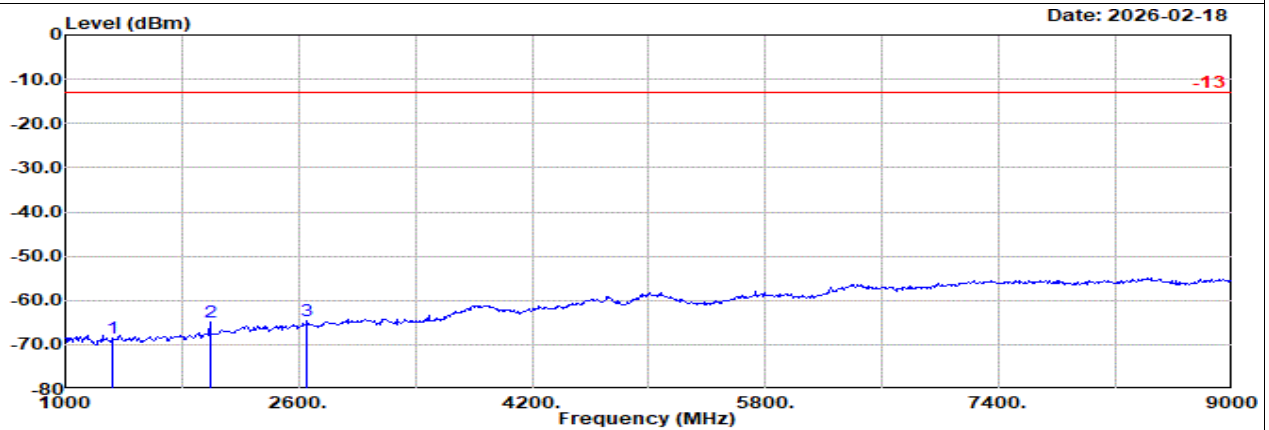

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 15M Ch134100 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin g	Limit g	Margin		Pol
	MHz	dBm		Factor	dB		dB	dB			dB	dB	
1	1328.00	-68.61	RMS	24.38	-25.66	1.07	-95.23	26.83	-13.00	-55.61	Vertical		
2	1992.00	-64.98	RMS	25.94	-24.85	0.80	-95.23	28.36	-13.00	-51.98	Vertical		
3	2656.00	-64.75	RMS	27.24	-23.99	0.94	-95.23	26.29	-13.00	-51.75	Vertical		




Ant. 8

Part 27N Mode 10

NR SA n71 15M Ch136100 1RB1 BPSK

M

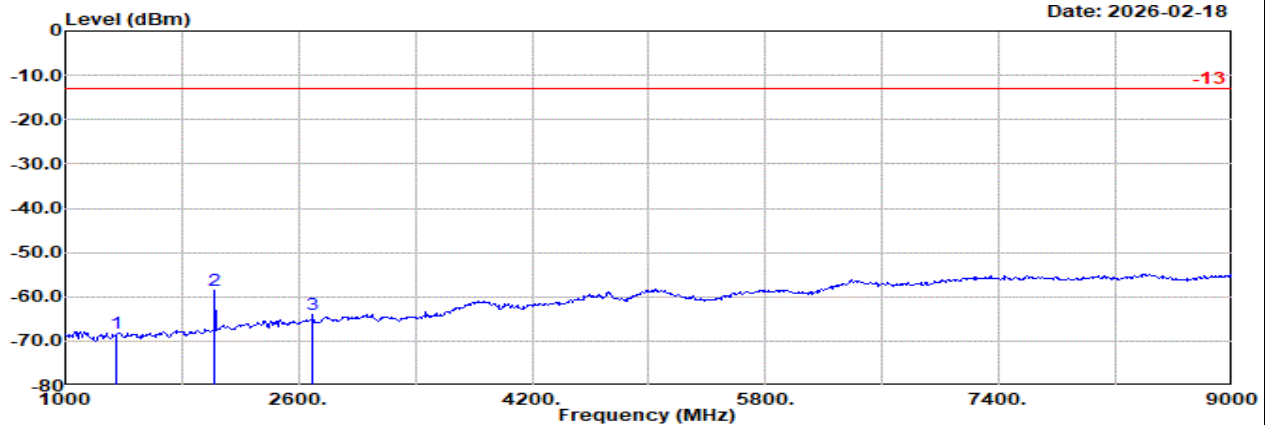


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 15M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1				g		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm		
1	1348.00	-68.31	RMS	24.38	-25.60	1.05	-95.23	27.09	-13.00	-55.31	Horizontal
2	2022.00	-58.56	RMS	26.20	-24.81	0.80	-95.23	34.48	-13.00	-45.56	Horizontal
3	2696.00	-63.95	RMS	27.40	-23.94	0.96	-95.23	26.86	-13.00	-50.95	Horizontal

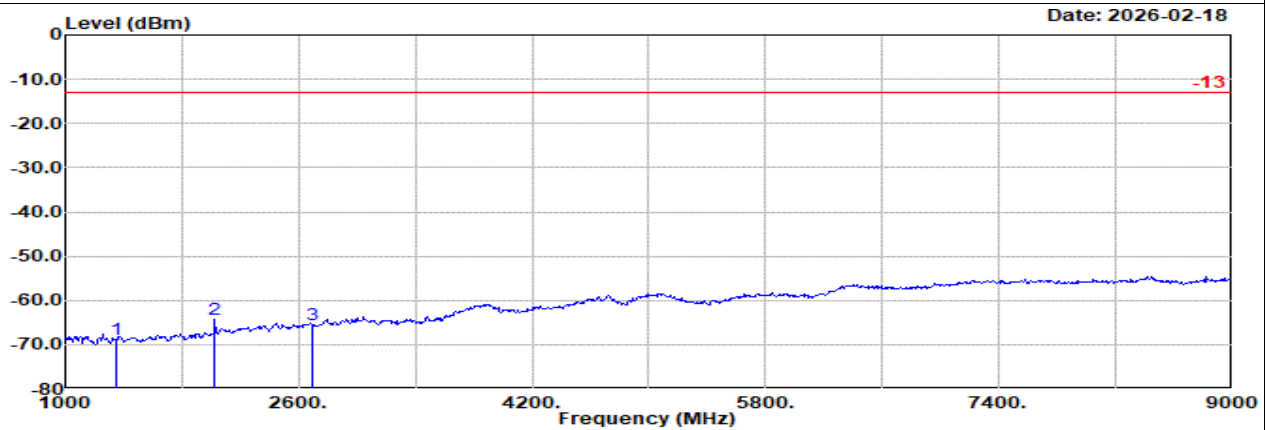

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 15M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit g	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1348.00	-68.76	RMS	24.38	-25.60	1.05	-95.23	26.64	-13.00	-55.76	Vertical
2	2022.00	-64.38	RMS	26.20	-24.81	0.80	-95.23	28.66	-13.00	-51.38	Vertical
3	2696.00	-65.52	RMS	27.40	-23.94	0.96	-95.23	25.29	-13.00	-52.52	Vertical




Ant. 8

Part 27N Mode 10

NR SA n71 15M Ch138100 1RB1 BPSK

H

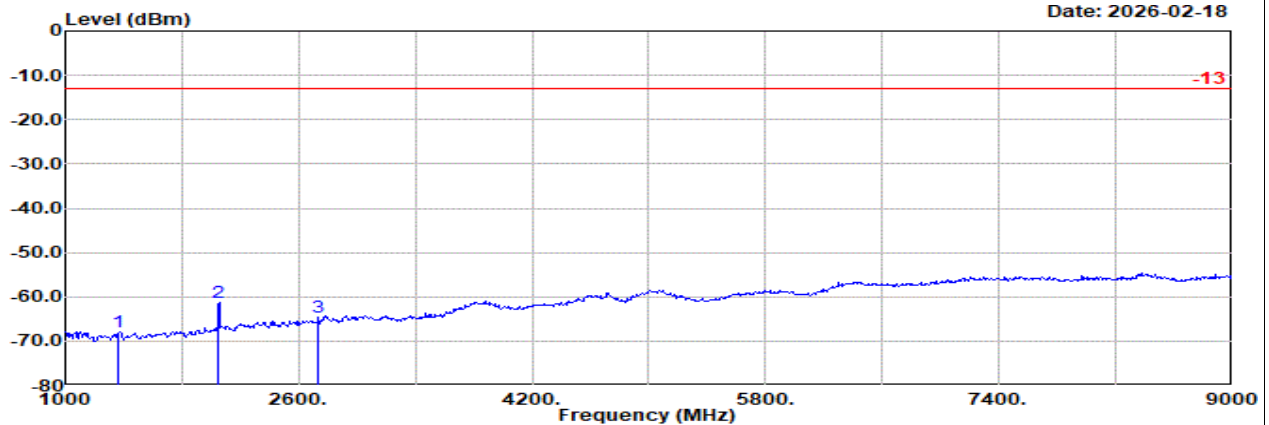


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

NR SA n71 15M Ch138100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1368.00	-67.86	RMS	24.50	-25.54	1.02	-95.23	27.39	-13.00	-54.86	Horizontal
2	2052.00	-61.15	RMS	26.12	-24.77	0.82	-95.23	31.91	-13.00	-48.15	Horizontal
3	2736.00	-64.64	RMS	27.50	-23.89	0.99	-95.23	25.99	-13.00	-51.64	Horizontal

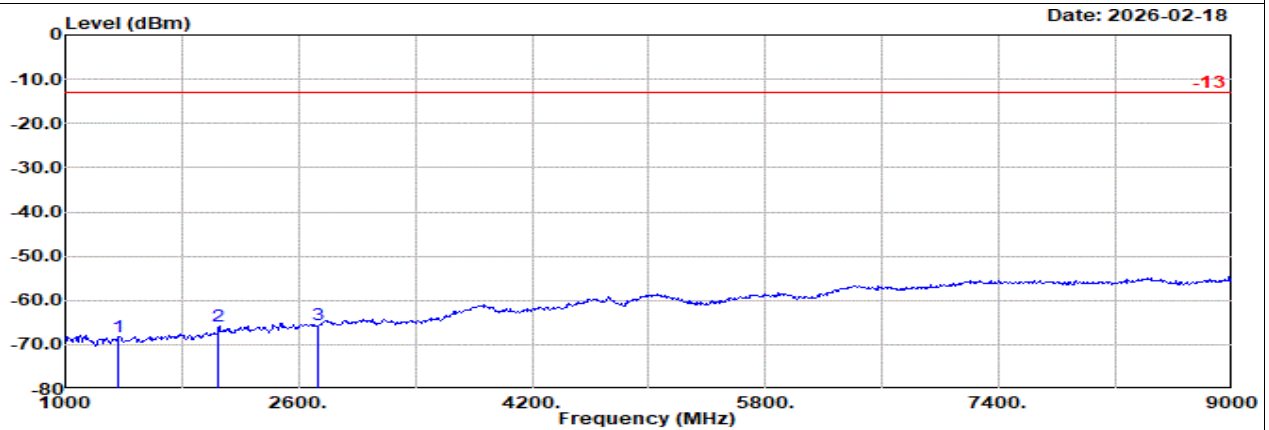

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

NR SA n71 15M Ch138100 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1368.00	-68.18	RMS	24.50	-25.54	1.02	-95.23	27.07	-13.00	-55.18	Vertical
2	2052.00	-65.68	RMS	26.12	-24.77	0.82	-95.23	27.38	-13.00	-52.68	Vertical
3	2736.00	-65.47	RMS	27.50	-23.89	0.99	-95.23	25.16	-13.00	-52.47	Vertical




Ant. 2+8

Part 27N Mode 11


EN-DC B2+n71 10M + 15M Ch18900 1RB0 QPSK + Ch134100 1RB1 BPSK

L

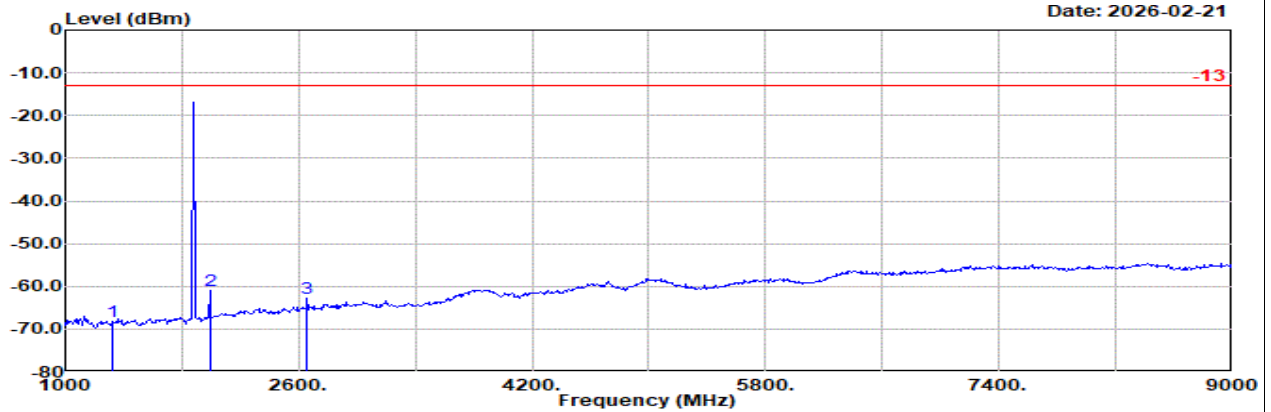

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: NR SA n71 15M Ch134100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB	g	dBm	dB	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1328.00	-68.19	RMS		24.38	-25.66	1.07	-95.23	27.25	-13.00	-55.19	Horizontal
2	1992.00	-60.83	RMS		25.94	-24.85	0.80	-95.23	32.51	-13.00	-47.83	Horizontal
3	2656.00	-62.67	RMS		27.24	-23.99	0.94	-95.23	28.37	-13.00	-49.67	Horizontal

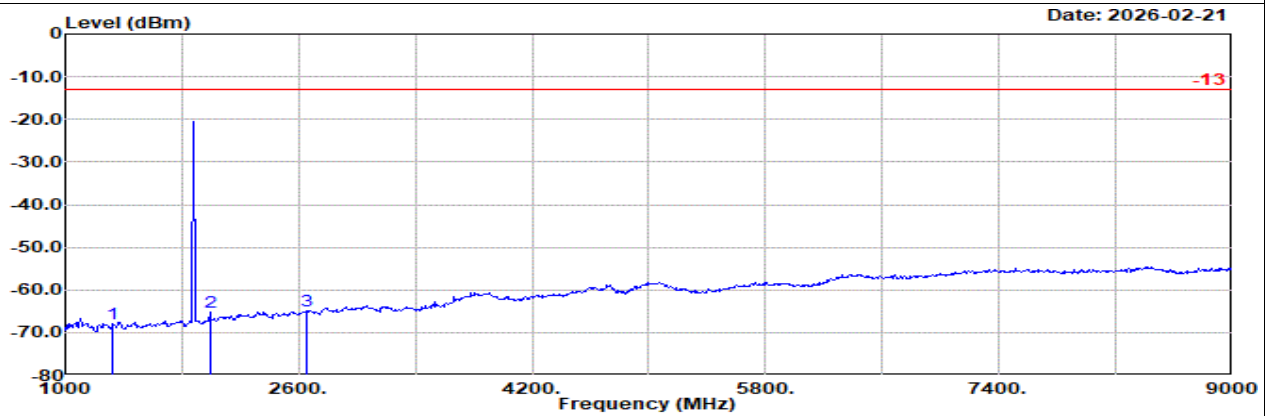

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: NR SA n71 15M Ch134100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB	g	dBm	dB	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1328.00	-67.97	RMS		24.38	-25.66	1.07	-95.23	27.47	-13.00	-54.97	Vertical
2	1992.00	-65.16	RMS		25.94	-24.85	0.80	-95.23	28.18	-13.00	-52.16	Vertical
3	2656.00	-64.79	RMS		27.24	-23.99	0.94	-95.23	26.25	-13.00	-51.79	Vertical




Ant. 2+8

Part 27N Mode 11


EN-DC B2+n71 10M + 15M Ch18900 1RB0 QPSK + Ch136100 1RB1 BPSK

M

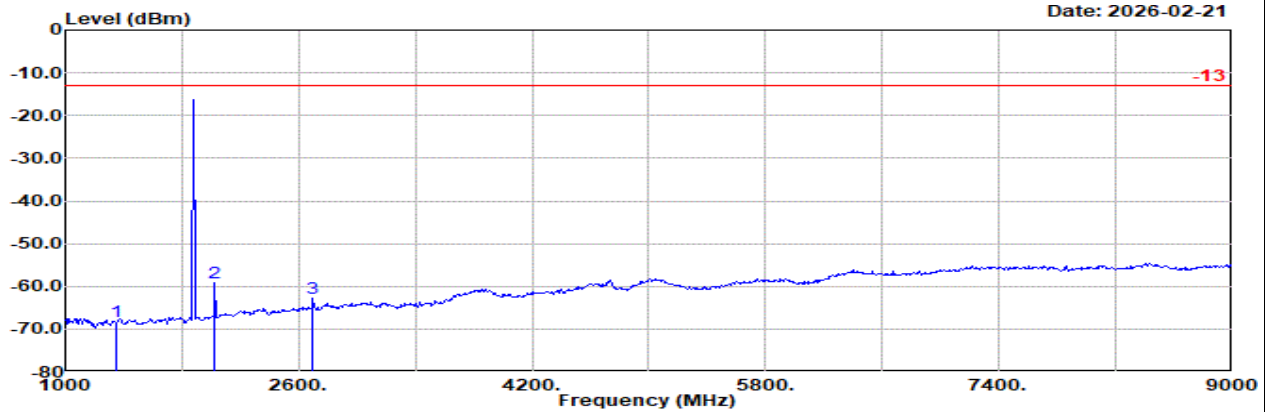

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B2 10M Ch18900 1RB0 QPSK
: NR SA n71 15M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1348.00	-68.34	RMS	24.38	-25.60	1.05	-95.23	27.06	-13.00	-55.34
2	2022.00	-59.04	RMS	26.20	-24.81	0.80	-95.23	34.00	-13.00	-46.04
3	2696.00	-62.78	RMS	27.40	-23.94	0.96	-95.23	28.03	-13.00	-49.78

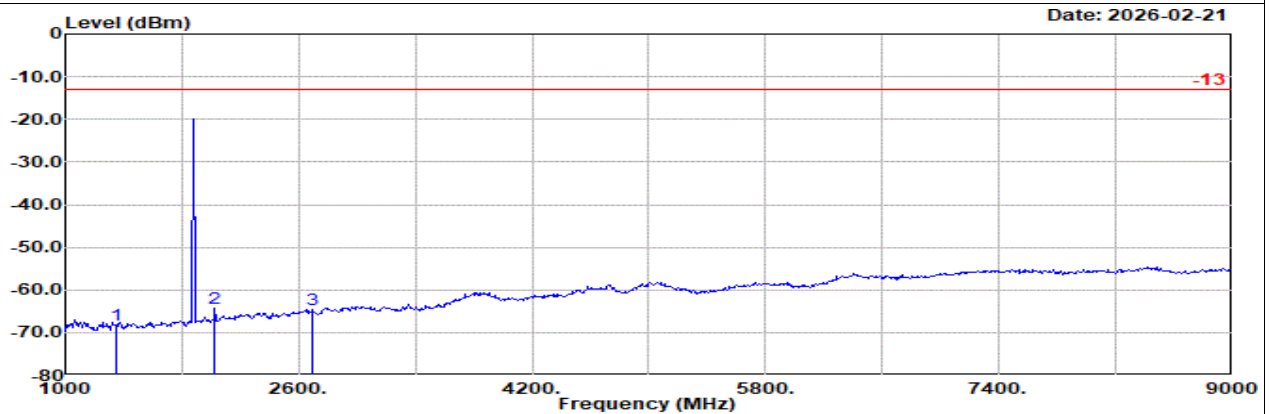

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B2 10M Ch18900 1RB0 QPSK
: NR SA n71 15M Ch136100 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1		g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1348.00	-68.18	RMS	24.38	-25.60	1.05	-95.23	27.22	-13.00	-55.18
2	2022.00	-64.18	RMS	26.20	-24.81	0.80	-95.23	28.86	-13.00	-51.18
3	2696.00	-64.74	RMS	27.40	-23.94	0.96	-95.23	26.07	-13.00	-51.74




Ant. 2+8

Part 27N Mode 11

EN-DC B2+n71 10M + 15M Ch18900 1RB0 QPSK + Ch138100 1RB1 BPSK

H

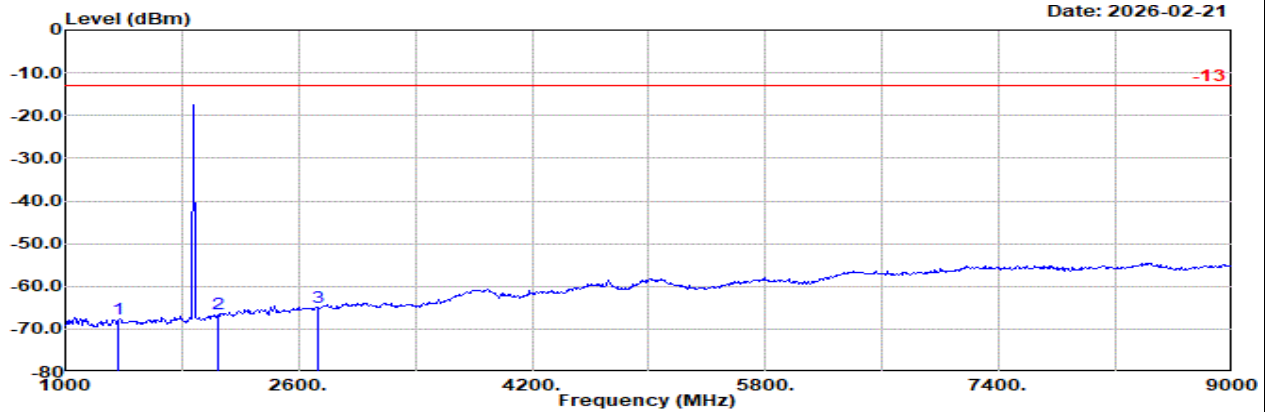


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B2 10M Ch18900 1RB0 QPSK

: NR SA n71 15M Ch138600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB	g	dBm	dB	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1368.00	-67.77	RMS		24.50	-25.54	1.02	-95.23	27.48	-13.00	-54.77	Horizontal
2	2052.00	-66.54	RMS		26.12	-24.77	0.82	-95.23	26.52	-13.00	-53.54	Horizontal
3	2736.00	-64.86	RMS		27.50	-23.89	0.99	-95.23	25.77	-13.00	-51.86	Horizontal

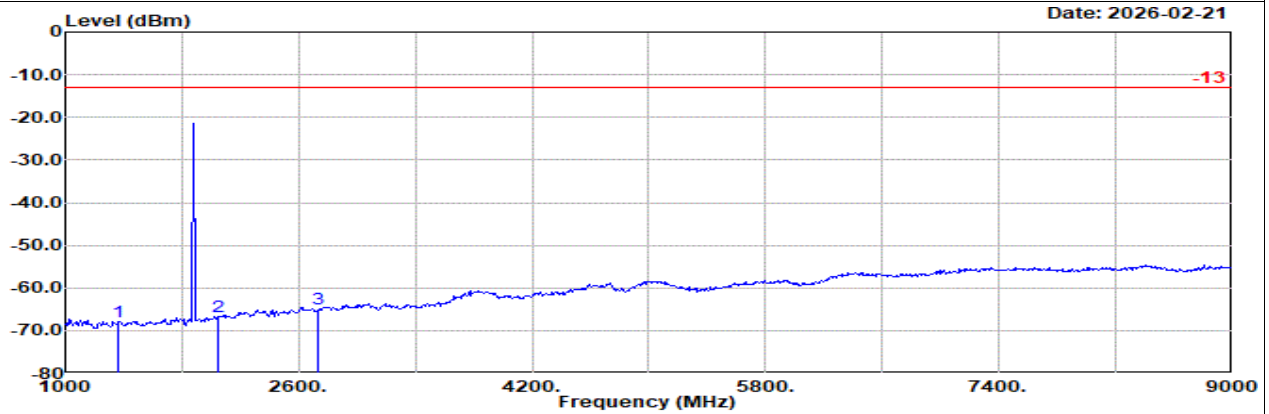

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B2 10M Ch18900 1RB0 QPSK

: NR SA n71 15M Ch138600 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1		dB	dB	g	dBm	dB	
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1368.00	-67.83	RMS		24.50	-25.54	1.02	-95.23	27.42	-13.00	-54.83	Vertical
2	2052.00	-66.81	RMS		26.12	-24.77	0.82	-95.23	26.25	-13.00	-53.81	Vertical
3	2736.00	-64.94	RMS		27.50	-23.89	0.99	-95.23	25.69	-13.00	-51.94	Vertical




Ant. 8

Part 27M Mode 12

NR SA n7 35M Ch503500 1RB1 BPSK

L

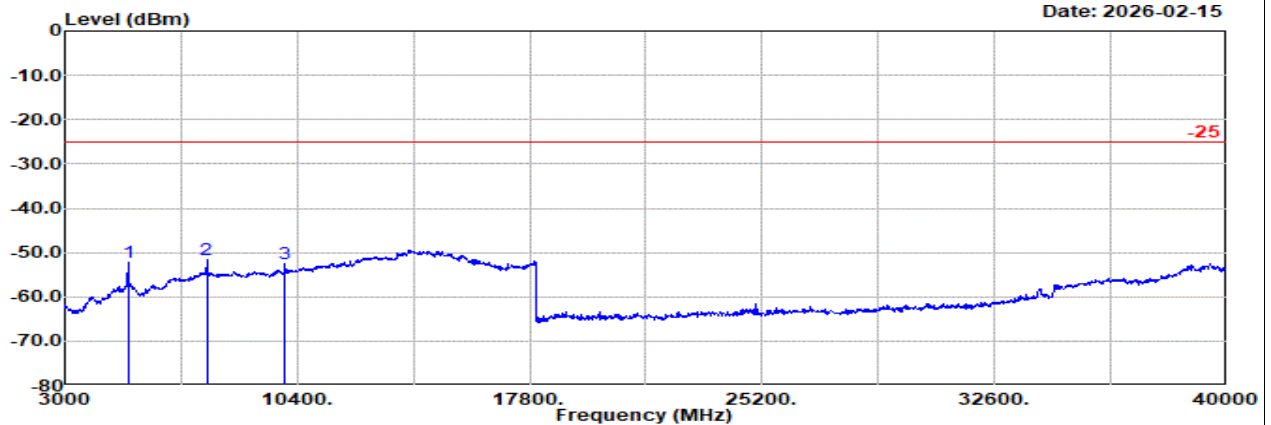


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n7 35M Ch503500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5010.00	-52.09	RMS	32.78	-21.59	2.26	-95.23	29.69	-25.00	-27.09	Horizontal	
2	7515.00	-51.49	RMS	36.67	-21.17	1.55	-95.23	26.69	-25.00	-26.49	Horizontal	
3	10005.00	-52.59	RMS	37.10	-21.54	1.65	-95.23	25.43	-25.00	-27.59	Horizontal	

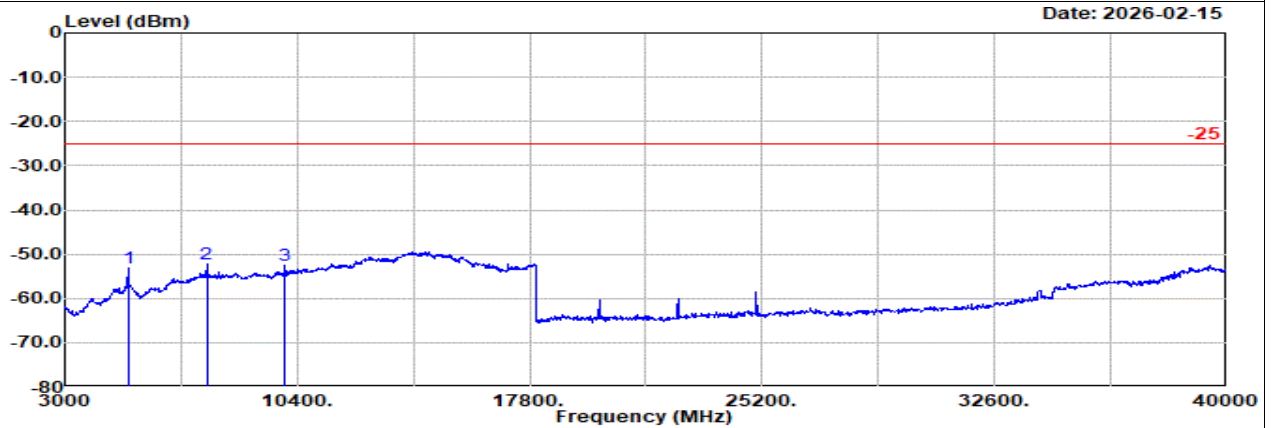

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n7 35M Ch503500 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5010.00	-53.08	RMS	32.78	-21.59	2.26	-95.23	28.70	-25.00	-28.08	Vertical	
2	7515.00	-52.27	RMS	36.67	-21.17	1.55	-95.23	25.91	-25.00	-27.27	Vertical	
3	10005.00	-52.38	RMS	37.10	-21.54	1.65	-95.23	25.64	-25.00	-27.38	Vertical	




Ant. 8

Part 27M Mode 12

NR SA n7 35M Ch507000 1RB1 BPSK

M

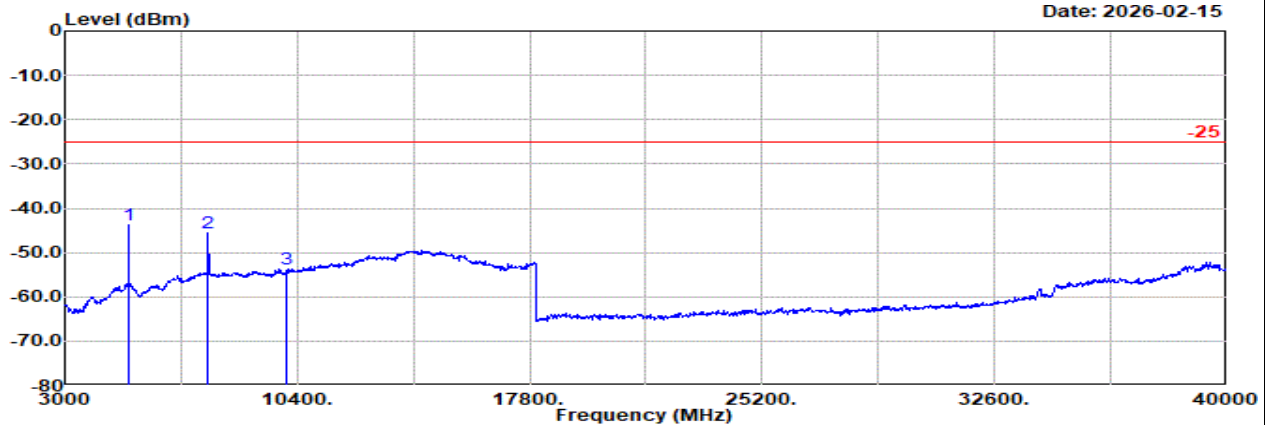


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n7 35M Ch507000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Reading	Limit		Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5040.00	-43.70	RMS		32.72	-21.61	2.22	-95.23	38.20	-25.00	-18.70	Horizontal
2	7560.00	-45.56	RMS		36.60	-21.19	1.59	-95.23	32.67	-25.00	-20.56	Horizontal
3	10080.00	-53.74	RMS		37.10	-21.59	1.66	-95.23	24.32	-25.00	-28.74	Horizontal

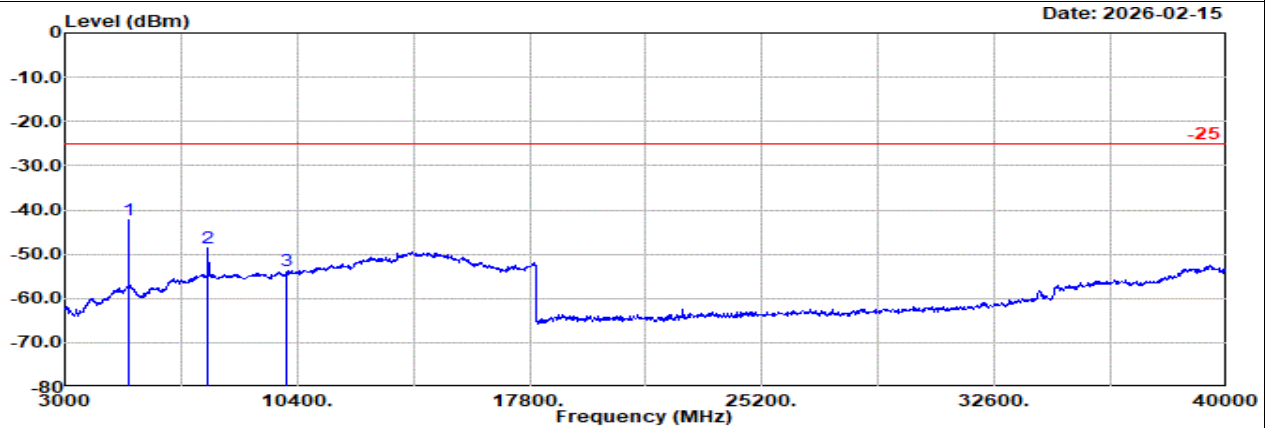

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n7 35M Ch507000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Reading	Limit		Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5040.00	-42.27	RMS		32.72	-21.61	2.22	-95.23	39.63	-25.00	-17.27	Vertical
2	7560.00	-48.47	RMS		36.60	-21.19	1.59	-95.23	29.76	-25.00	-23.47	Vertical
3	10080.00	-53.74	RMS		37.10	-21.59	1.66	-95.23	24.32	-25.00	-28.74	Vertical




Ant. 8

Part 27M Mode 12

NR SA n7 35M Ch510500 1RB1 BPSK

H

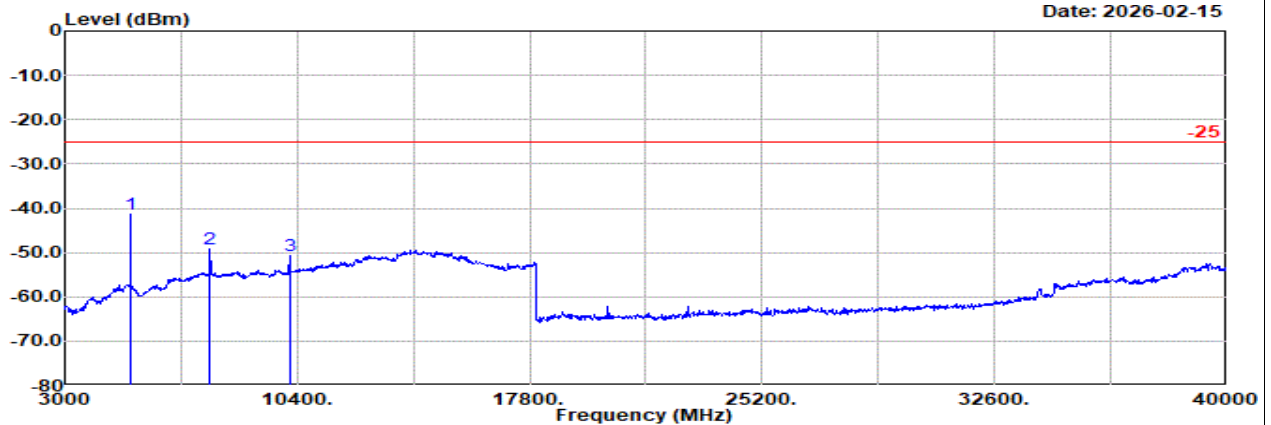


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n7 35M Ch510500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	dB	dB	dB	dBuV	dBm	dB	
1	5085.00	-41.30	RMS	32.56	-21.64	2.16	-95.23	40.85	-25.00	-16.30	Horizontal
2	7620.00	-49.20	RMS	36.60	-21.24	1.62	-95.23	29.05	-25.00	-24.20	Horizontal
3	10155.00	-50.59	RMS	37.21	-21.63	1.68	-95.23	27.38	-25.00	-25.59	Horizontal

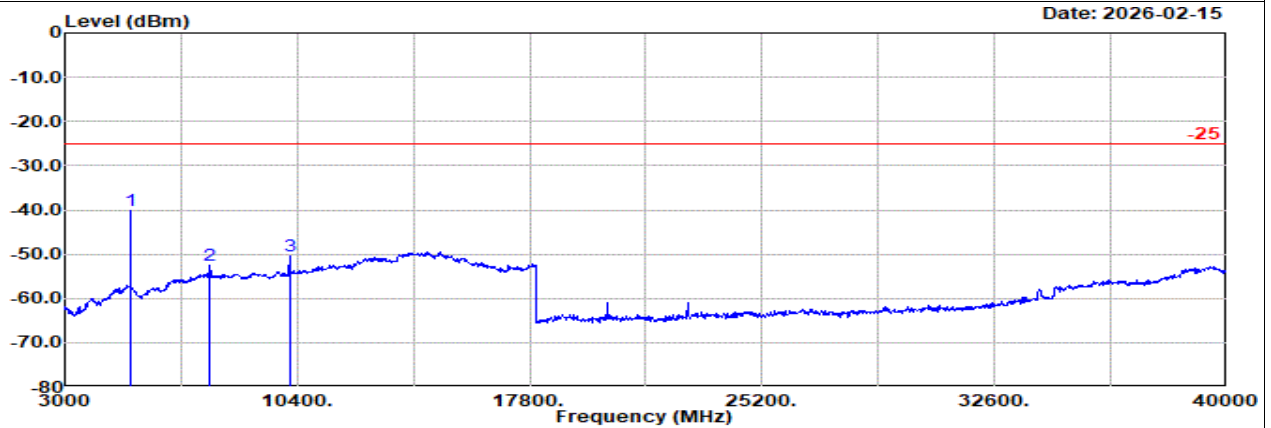

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n7 35M Ch510500 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	dB	dB	dB	dBuV	dBm	dB	
1	5085.00	-40.03	RMS	32.56	-21.64	2.16	-95.23	42.12	-25.00	-15.03	Vertical
2	7620.00	-52.46	RMS	36.60	-21.24	1.62	-95.23	25.79	-25.00	-27.46	Vertical
3	10155.00	-50.46	RMS	37.21	-21.63	1.68	-95.23	27.51	-25.00	-25.46	Vertical




Ant. 8

Part 27M Mode 13

NR SA n38 20M Ch516000 1RB1 BPSK

L

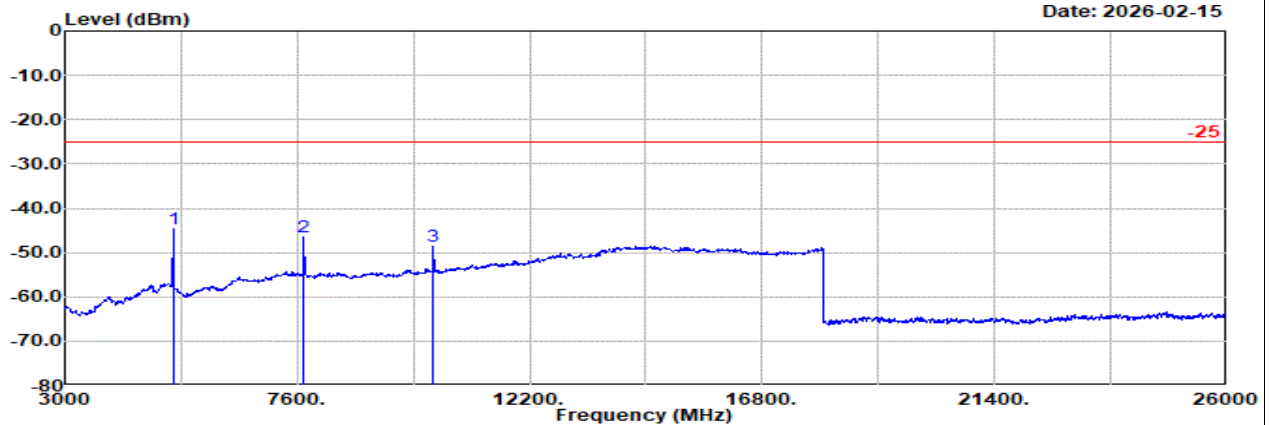


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n38 20M Ch516000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5143.00	-44.66	RMS	32.50	-21.68	2.08	-95.23	37.67	-25.00	-19.66	Horizontal	
2	7714.00	-46.53	RMS	36.53	-21.34	1.58	-95.23	31.93	-25.00	-21.53	Horizontal	
3	10285.00	-48.54	RMS	37.27	-21.71	1.70	-95.23	29.43	-25.00	-23.54	Horizontal	

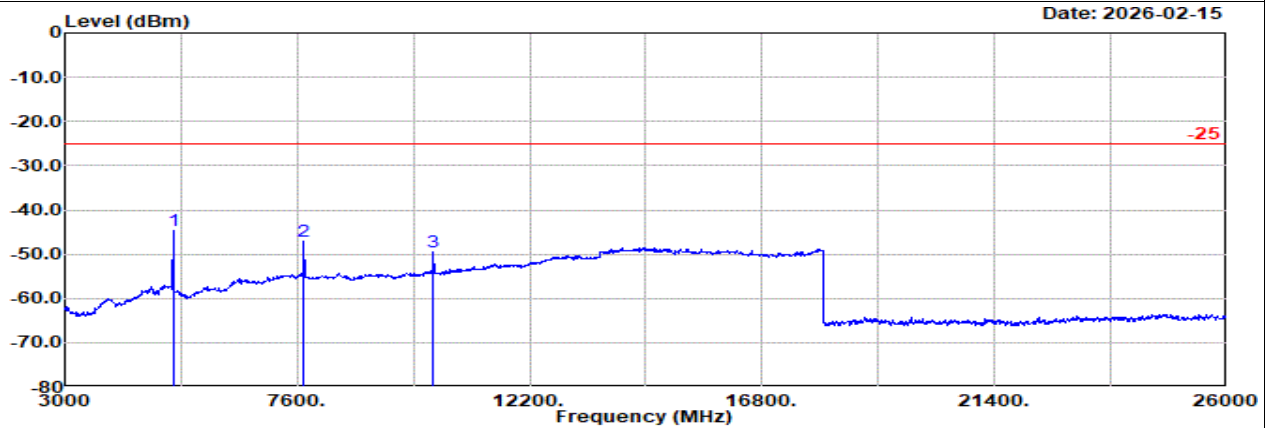

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n38 20M Ch516000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5143.00	-44.60	RMS	32.50	-21.68	2.08	-95.23	37.73	-25.00	-19.60	Vertical	
2	7714.00	-47.04	RMS	36.53	-21.34	1.58	-95.23	31.42	-25.00	-22.04	Vertical	
3	10285.00	-49.63	RMS	37.27	-21.71	1.70	-95.23	28.34	-25.00	-24.63	Vertical	




Ant. 8

Part 27M Mode 13

NR SA n38 20M Ch519000 1RB1 BPSK

M

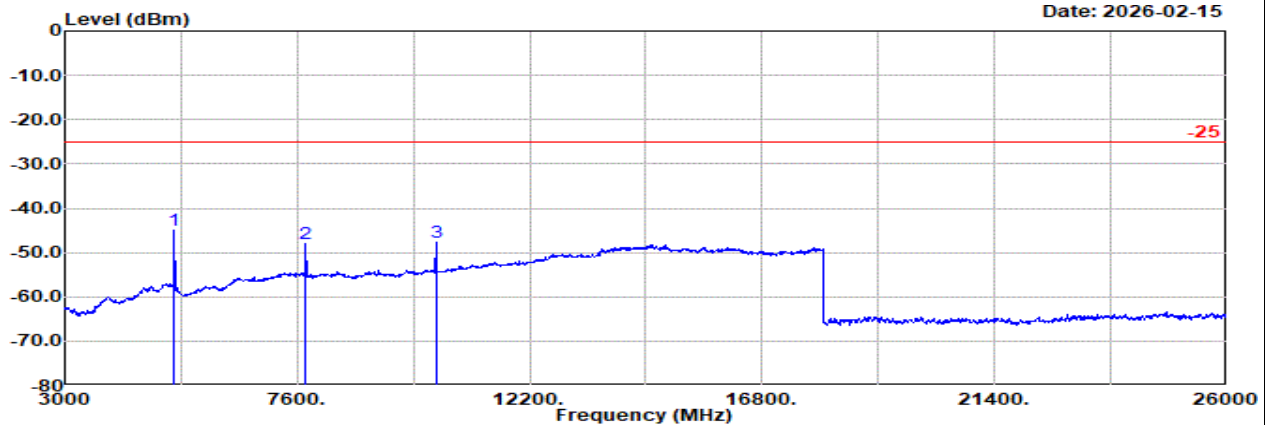


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n38 20M Ch519000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5173.00	-44.92	RMS	32.50	-21.70	2.04	-95.23	37.47	-25.00	-19.92	Horizontal	
2	7759.00	-48.06	RMS	36.60	-21.38	1.56	-95.23	30.39	-25.00	-23.06	Horizontal	
3	10345.00	-47.75	RMS	37.39	-21.74	1.71	-95.23	30.12	-25.00	-22.75	Horizontal	

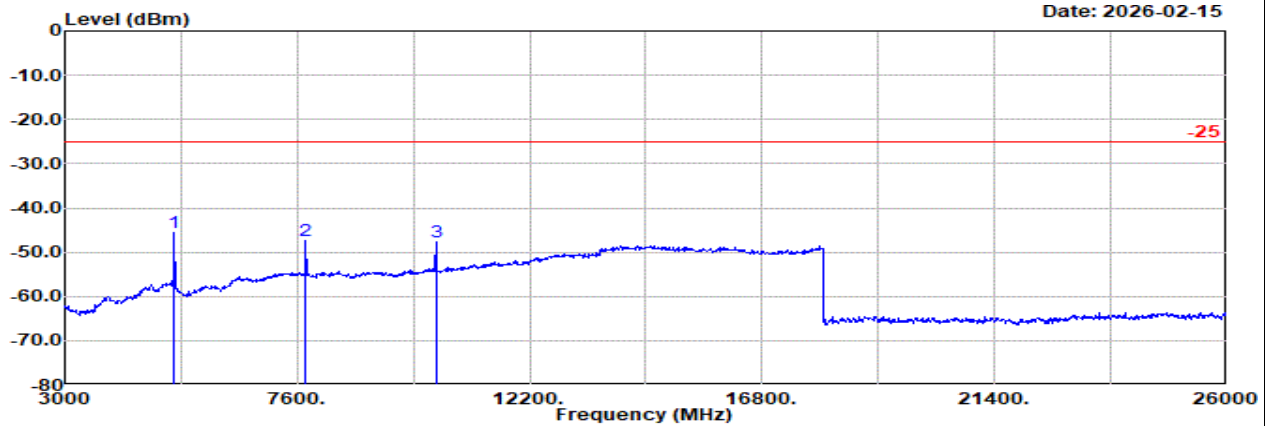

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n38 20M Ch519000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5173.00	-45.70	RMS	32.50	-21.70	2.04	-95.23	36.69	-25.00	-20.70	Vertical	
2	7759.00	-47.31	RMS	36.60	-21.38	1.56	-95.23	31.14	-25.00	-22.31	Vertical	
3	10345.00	-47.84	RMS	37.39	-21.74	1.71	-95.23	30.03	-25.00	-22.84	Vertical	




Ant. 8

Part 27M Mode 13

NR SA n38 20M Ch522000 1RB1 BPSK

H

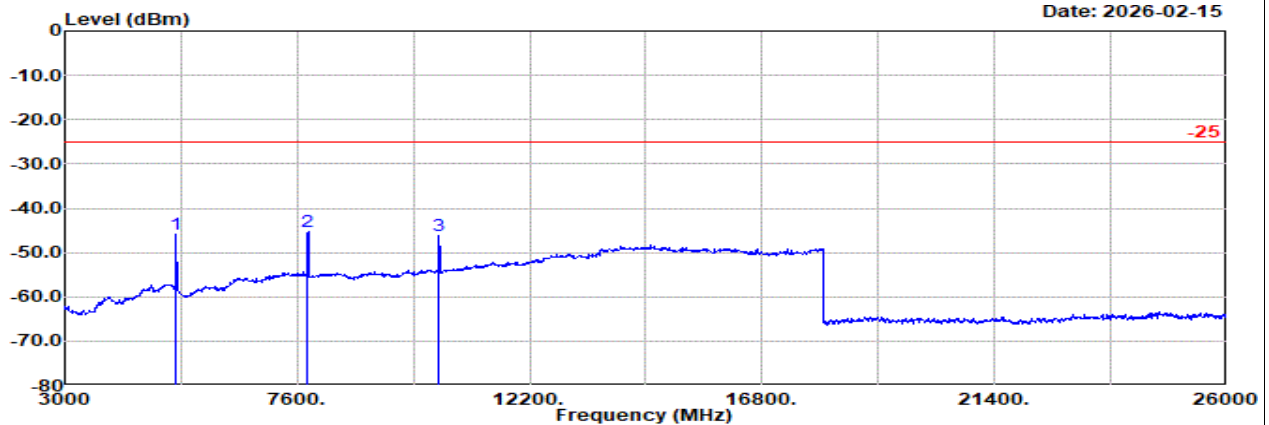


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n38 20M Ch522000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5203.00	-45.98	RMS	32.49	-21.72	1.99	-95.23	36.49	-25.00	-20.98	Horizontal	
2	7804.00	-45.41	RMS	36.60	-21.43	1.54	-95.23	33.11	-25.00	-20.41	Horizontal	
3	10405.00	-46.07	RMS	37.20	-21.77	1.72	-95.23	32.01	-25.00	-21.07	Horizontal	

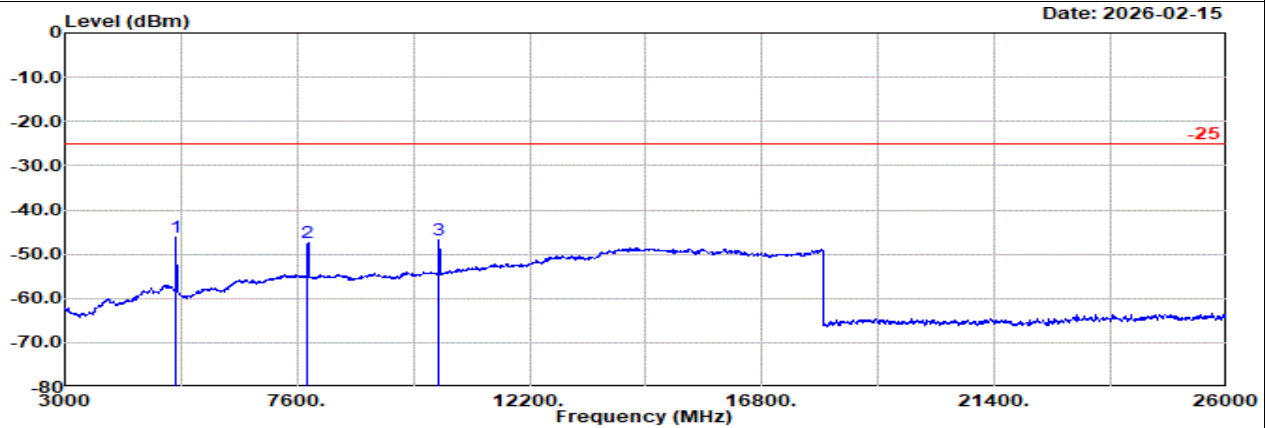

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n38 20M Ch522000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5203.00	-46.08	RMS	32.49	-21.72	1.99	-95.23	36.39	-25.00	-21.08	Vertical	
2	7804.00	-47.42	RMS	36.60	-21.43	1.54	-95.23	31.10	-25.00	-22.42	Vertical	
3	10405.00	-46.85	RMS	37.20	-21.77	1.72	-95.23	31.23	-25.00	-21.85	Vertical	




Ant. 8

Part 27M Mode 14

NR SA n41 HPUE 20M Ch501204 1RB1 BPSK

L

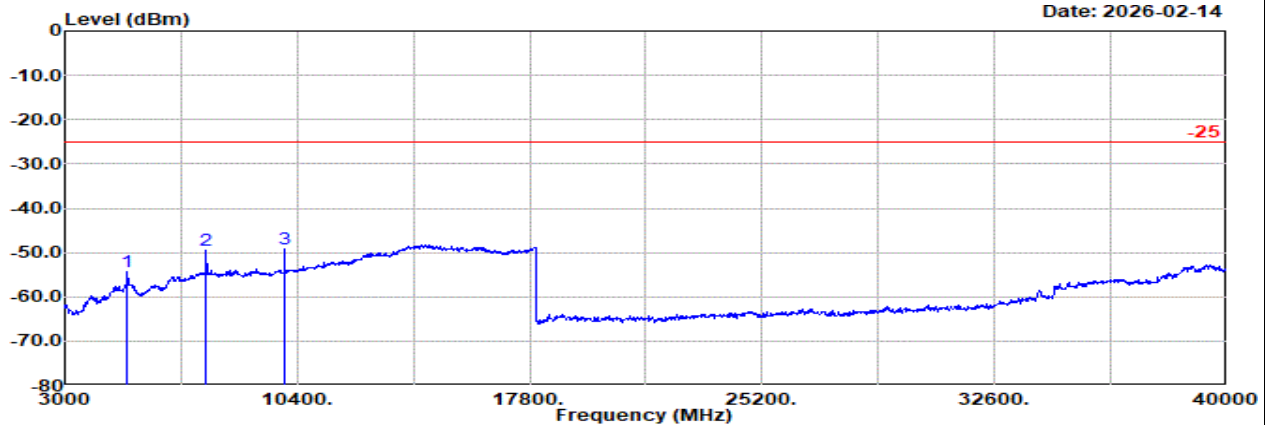


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n41 20M Ch501204 1RB1 BPSK

	Freq Level		Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	Factor	l		dB	dB	dB		dBuV	dBm		
1	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4995.00	-54.45	RMS	32.78	-21.59	2.27	-95.23	27.32	-25.00	-29.45	Horizontal
2	7492.00	-49.59	RMS	36.72	-21.17	1.53	-95.23	28.56	-25.00	-24.59	Horizontal
3	9989.00	-49.21	RMS	37.08	-21.55	1.65	-95.23	28.84	-25.00	-24.21	Horizontal

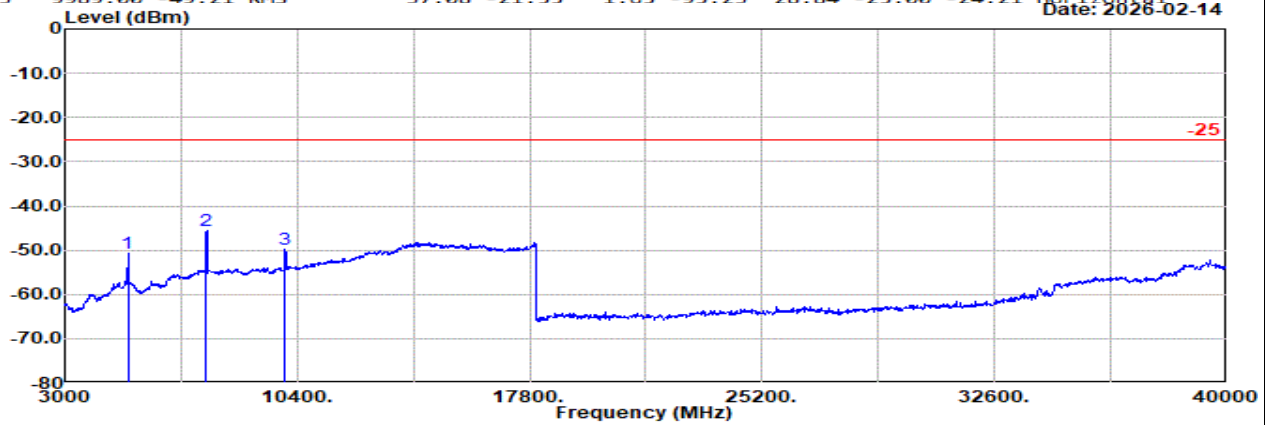


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n41 20M Ch502002 1RB1 BPSK

	Freq Level		Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1			g			
	MHz	dBm		dB/m	dB	dB		dBuV	dBm	dB	
1	5003.00	-50.85	RMS	32.79	-21.58	2.27	-95.23	30.90	-25.00	-25.85	Horizontal
2	7504.00	-45.49	RMS	36.69	-21.16	1.54	-95.23	32.67	-25.00	-20.49	Horizontal
3	10005.00	-49.89	RMS	37.10	-21.54	1.65	-95.23	28.13	-25.00	-24.89	Horizontal

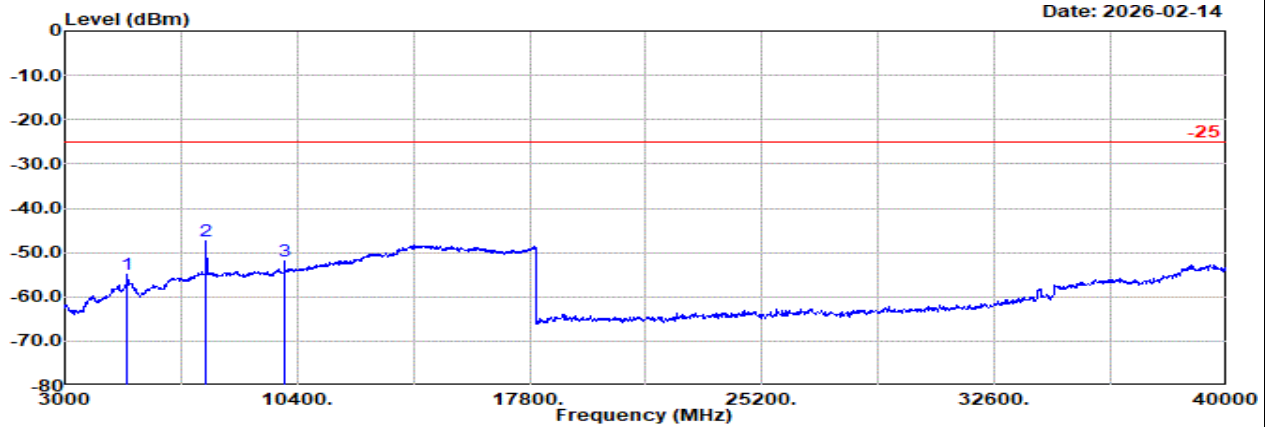


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n41 20M Ch501204 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb dB	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
1	4995.00	-54.99	RMS	32.78	-21.59	2.27	-95.23	26.78	-25.00	-29.99	Vertical
2	7492.00	-47.31	RMS	36.72	-21.17	1.53	-95.23	30.84	-25.00	-22.31	Vertical
3	9989.00	-51.94	RMS	37.08	-21.55	1.65	-95.23	26.11	-25.00	-26.94	Vertical

Date: 2026-02-14

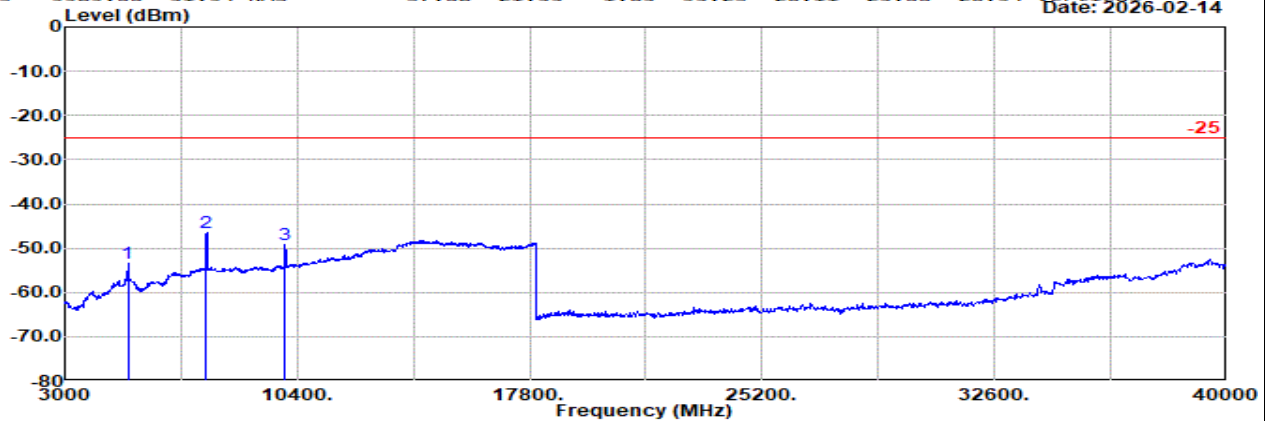

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n41 20M Ch502002 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb dB	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
1	5003.00	-53.34	RMS	32.79	-21.58	2.27	-95.23	28.41	-25.00	-28.34	Vertical
2	7504.00	-46.46	RMS	36.69	-21.16	1.54	-95.23	31.70	-25.00	-21.46	Vertical
3	10005.00	-49.26	RMS	37.10	-21.54	1.65	-95.23	28.76	-25.00	-24.26	Vertical




Ant. 8

Part 27M Mode 14

NR SA n41 HPUE 20M Ch518598 1RB1 BPSK

M

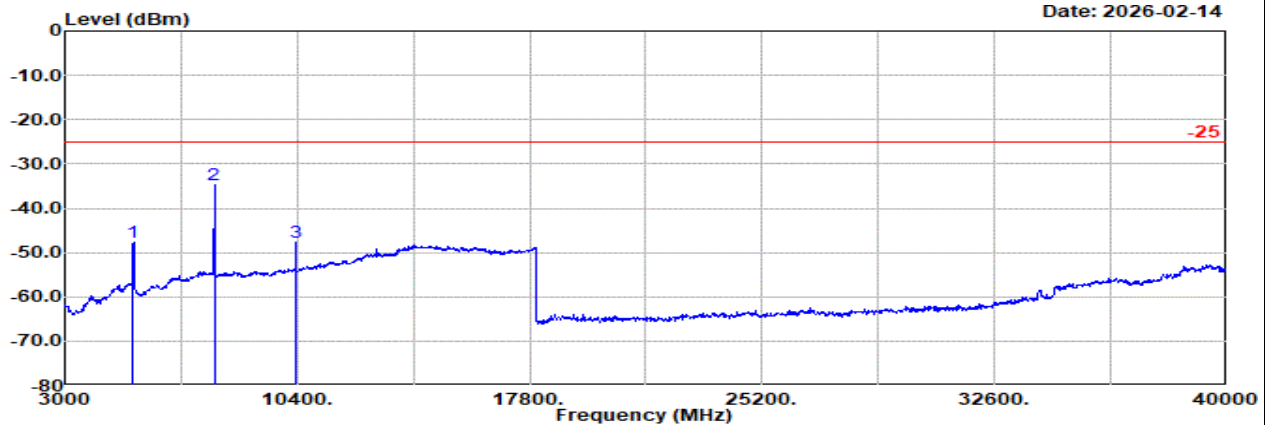


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n41 20M Ch518598 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5169.00	-47.55	RMS	32.50	-21.70	2.04	-95.23	34.84	-25.00	-22.55	Horizontal	
2	7753.00	-34.70	RMS	36.60	-21.38	1.56	-95.23	43.75	-25.00	-9.70	Horizontal	
3	10337.00	-47.60	RMS	37.37	-21.74	1.71	-95.23	30.29	-25.00	-22.60	Horizontal	

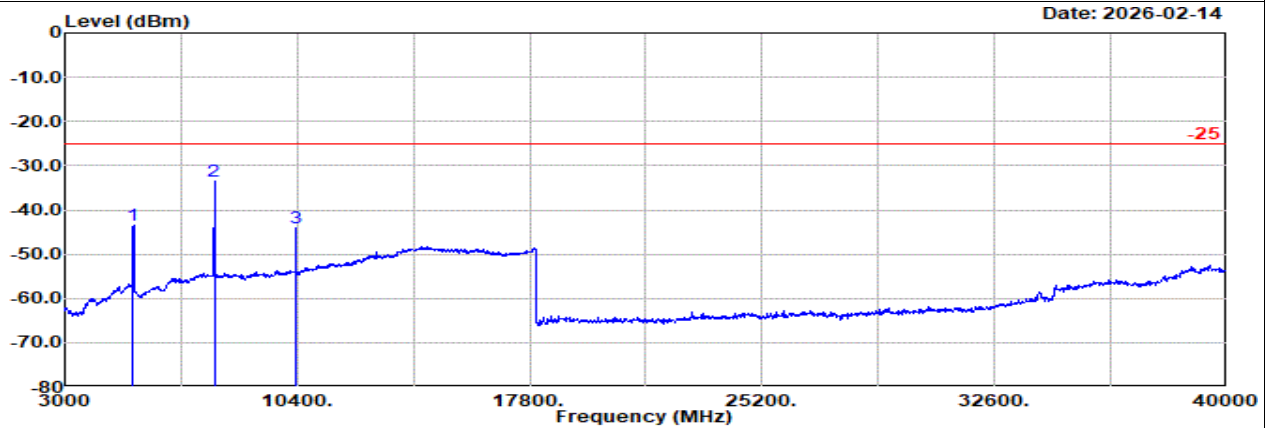

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n41 20M Ch518598 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Reading	Limit		Margin	Pol
	MHz	dBm			dB/m	dB			dBuV	dBm	dB	
1	5169.00	-43.46	RMS	32.50	-21.70	2.04	-95.23	38.93	-25.00	-18.46	Vertical	
2	7753.00	-33.57	RMS	36.60	-21.38	1.56	-95.23	44.88	-25.00	-8.57	Vertical	
3	10337.00	-44.05	RMS	37.37	-21.74	1.71	-95.23	33.84	-25.00	-19.05	Vertical	




Ant. 8

Part 27M Mode 14

NR SA n41 HPUE 20M Ch535998 1RB1 BPSK

H

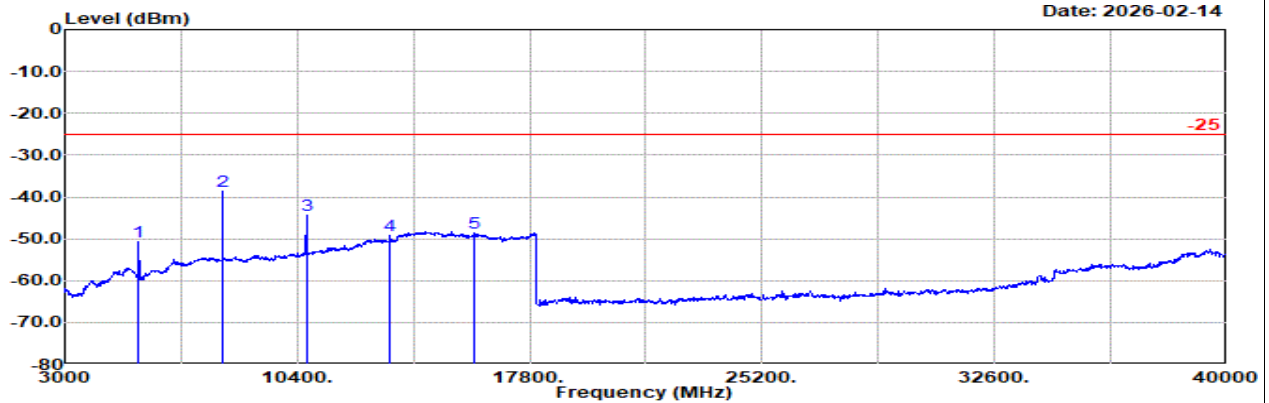


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n41 20M Ch535998 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	5343.00	-50.84	RMS		32.30	-21.76	1.73	-95.23	32.12	-25.00	-25.84	Horizontal
2	8014.00	-38.66	RMS		36.53	-21.58	1.48	-95.23	40.14	-25.00	-13.66	Horizontal
3	10685.00	-44.35	RMS		37.50	-21.79	1.77	-95.23	33.40	-25.00	-19.35	Horizontal
4	13365.00	-49.16	RMS		40.03	-21.93	2.32	-95.23	25.65	-25.00	-24.16	Horizontal
5	16035.00	-48.72	RMS		40.90	-23.61	2.37	-95.23	26.85	-25.00	-23.72	Horizontal

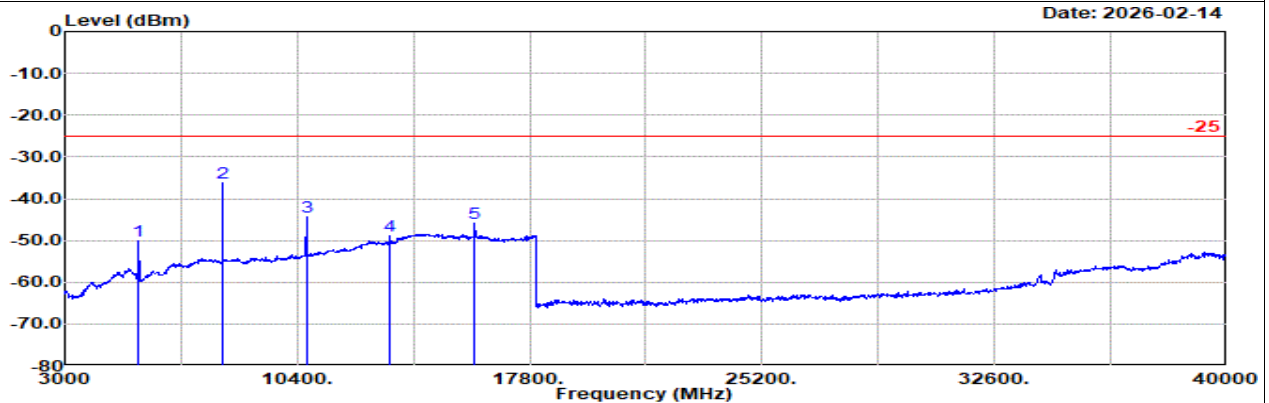

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n41 20M Ch535998 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
					dB/m	dB						
1	5343.00	-50.24	RMS		32.30	-21.76	1.73	-95.23	32.72	-25.00	-25.24	Vertical
2	8014.00	-36.22	RMS		36.53	-21.58	1.48	-95.23	42.58	-25.00	-11.22	Vertical
3	10685.00	-44.36	RMS		37.50	-21.79	1.77	-95.23	33.39	-25.00	-19.36	Vertical
4	13365.00	-48.85	RMS		40.03	-21.93	2.32	-95.23	25.96	-25.00	-23.85	Vertical
5	16035.00	-45.92	RMS		40.90	-23.61	2.37	-95.23	29.65	-25.00	-20.92	Vertical




Ant. 8+1

Part 27M Mode 15


EN-DC B5+n7 10M + 35M Ch20525 1RB0 QPSK + Ch503500 1RB1 BPSK

L

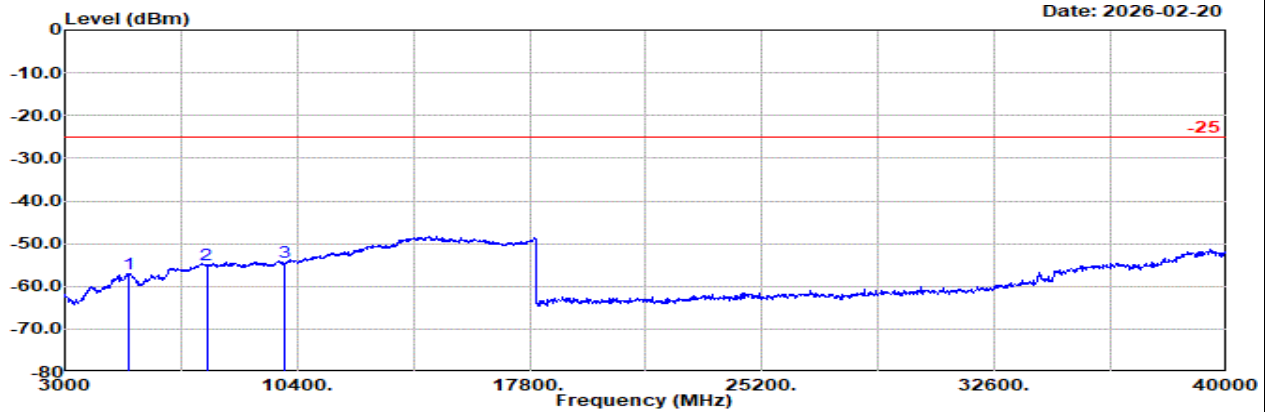

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 40M Ch504000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	5010.00	-57.03	RMS	32.78	-21.59	2.26	-95.23	24.75	-25.00	-32.03	Horizontal
2	7515.00	-54.85	RMS	36.67	-21.17	1.55	-95.23	23.33	-25.00	-29.85	Horizontal
3	10005.00	-54.37	RMS	37.10	-21.54	1.65	-95.23	23.65	-25.00	-29.37	Horizontal

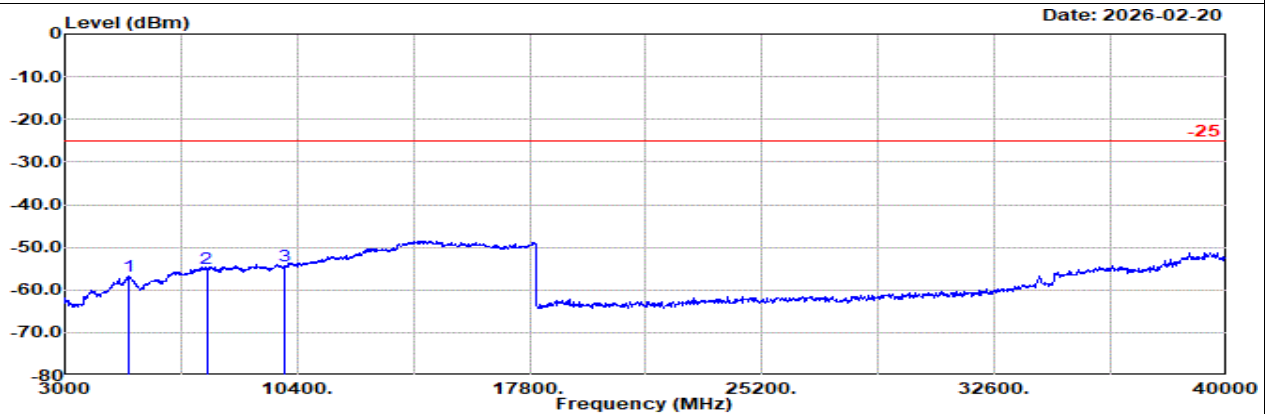

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 40M Ch504000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	5010.00	-56.81	RMS	32.78	-21.59	2.26	-95.23	24.97	-25.00	-31.81	Vertical
2	7515.00	-54.80	RMS	36.67	-21.17	1.55	-95.23	23.38	-25.00	-29.80	Vertical
3	10005.00	-54.40	RMS	37.10	-21.54	1.65	-95.23	23.62	-25.00	-29.40	Vertical




Ant. 8+1

Part 27M Mode 15

EN-DC B5+n7 10M + 35M Ch20525 1RB0 QPSK + Ch507000 1RB1 BPSK

M

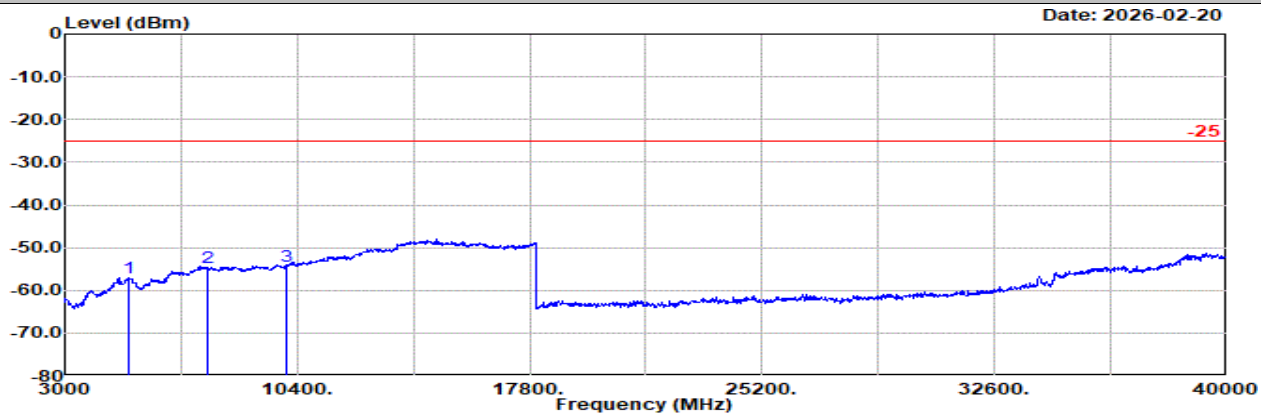


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 30M Ch507000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5040.00	-57.16	RMS	32.72	-21.61	2.22	-95.23	24.74	-25.00	-32.16	Horizontal	
2	7560.00	-54.78	RMS	36.60	-21.19	1.59	-95.23	23.45	-25.00	-29.78	Horizontal	
3	10080.00	-54.23	RMS	37.10	-21.59	1.66	-95.23	23.83	-25.00	-29.23	Horizontal	

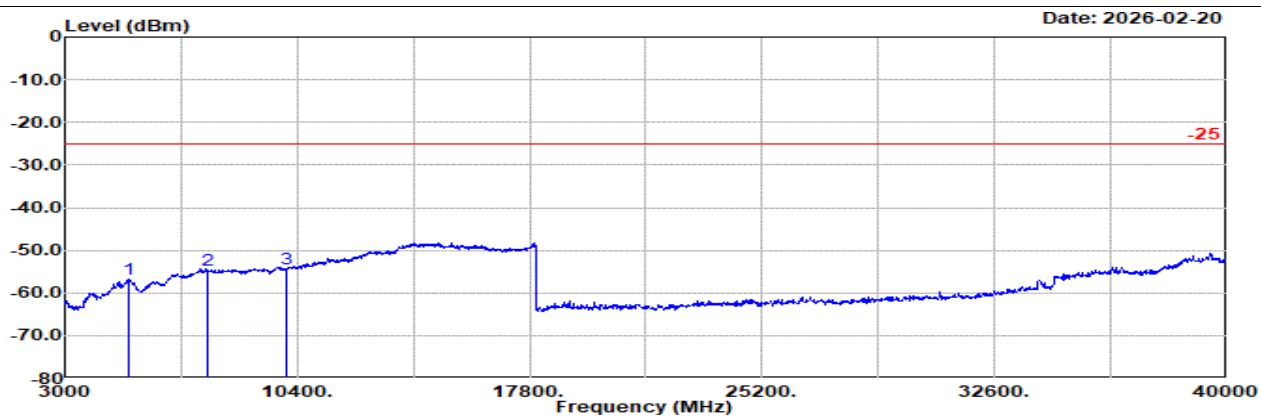

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n7 30M Ch507000 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5040.00	-56.69	RMS	32.72	-21.61	2.22	-95.23	25.21	-25.00	-31.69	Vertical	
2	7560.00	-54.62	RMS	36.60	-21.19	1.59	-95.23	23.61	-25.00	-29.62	Vertical	
3	10080.00	-54.20	RMS	37.10	-21.59	1.66	-95.23	23.86	-25.00	-29.20	Vertical	




Ant. 8+1

Part 27M Mode 15


EN-DC B5+n7 10M + 35M Ch20525 1RB0 QPSK + Ch510500 1RB1 BPSK

H

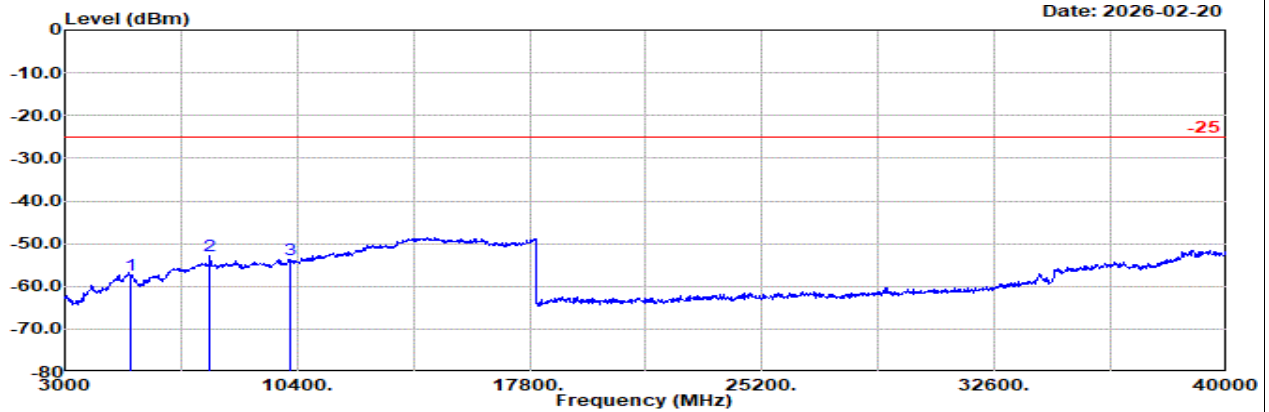

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 35M Ch510500 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	Amp\Cb							
	MHz	dBm			1			g				
1	5085.00	-57.27	RMS	32.56	-21.64	2.16	-95.23	24.88	-25.00	-32.27		Horizontal
2	7620.00	-52.74	RMS	36.60	-21.24	1.62	-95.23	25.51	-25.00	-27.74		Horizontal
3	10155.00	-53.79	RMS	37.21	-21.63	1.68	-95.23	24.18	-25.00	-28.79		Horizontal

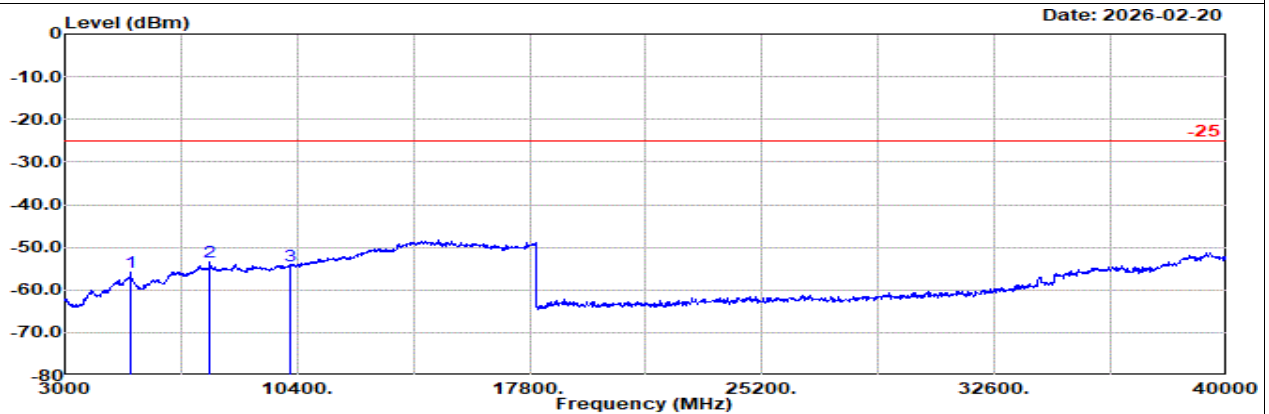

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n7 35M Ch510500 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin		Pol
				Factor	Amp\Cb							
	MHz	dBm			1			g				
1	5085.00	-55.74	RMS	32.56	-21.64	2.16	-95.23	26.41	-25.00	-30.74		Vertical
2	7620.00	-53.30	RMS	36.60	-21.24	1.62	-95.23	24.95	-25.00	-28.30		Vertical
3	10155.00	-54.30	RMS	37.21	-21.63	1.68	-95.23	23.67	-25.00	-29.30		Vertical




Ant. 8+1

Part 27M Mode 16


EN-DC B5+n38 10M + 20M Ch20525 1RB0 QPSK + Ch516000 1RB1 BPSK

L

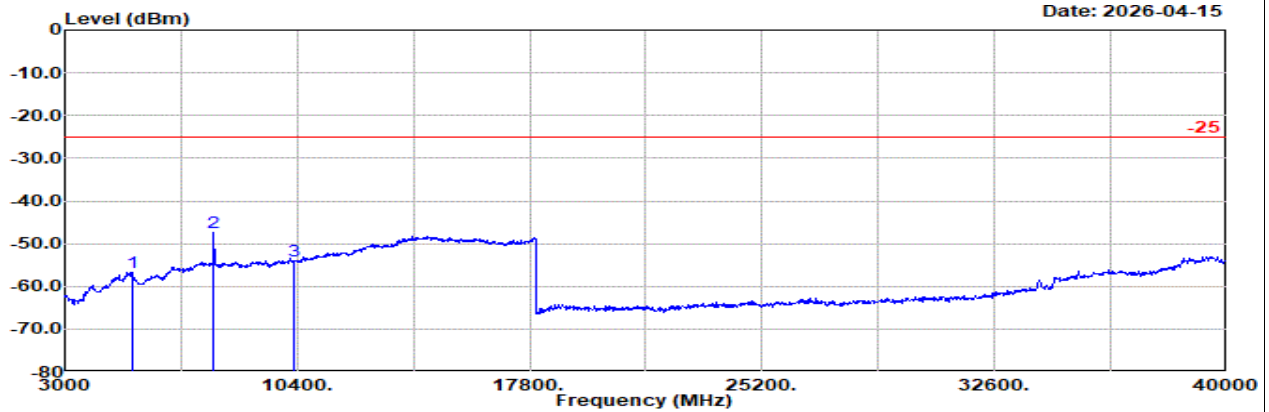

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n38 20M Ch516000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm								
1	5143.00	-56.81	RMS	32.50	-21.68	2.08	-95.23	25.52	-25.00	-31.81 Horizontal
2	7714.00	-47.32	RMS	36.53	-21.34	1.58	-95.23	31.14	-25.00	-22.32 Horizontal
3	10285.00	-53.96	RMS	37.27	-21.71	1.70	-95.23	24.01	-25.00	-28.96 Horizontal

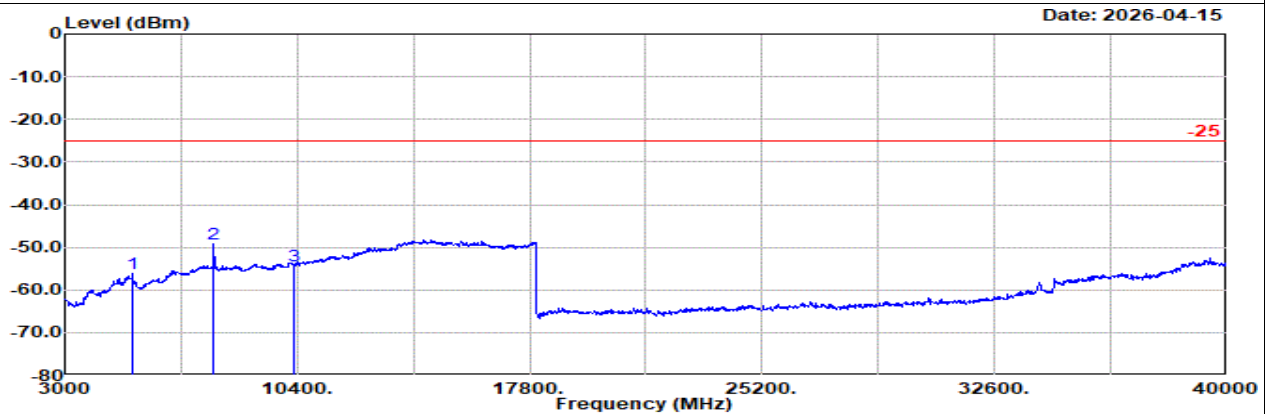

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n38 20M Ch516000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm								
1	5143.00	-56.11	RMS	32.50	-21.68	2.08	-95.23	26.22	-25.00	-31.11 Vertical
2	7714.00	-49.25	RMS	36.53	-21.34	1.58	-95.23	29.21	-25.00	-24.25 Vertical
3	10285.00	-54.41	RMS	37.27	-21.71	1.70	-95.23	23.56	-25.00	-29.41 Vertical




Ant. 8+1

Part 27M Mode 16

EN-DC B5+n38 10M + 20M Ch20525 1RB0 QPSK + Ch519000 1RB1 BPSK

M

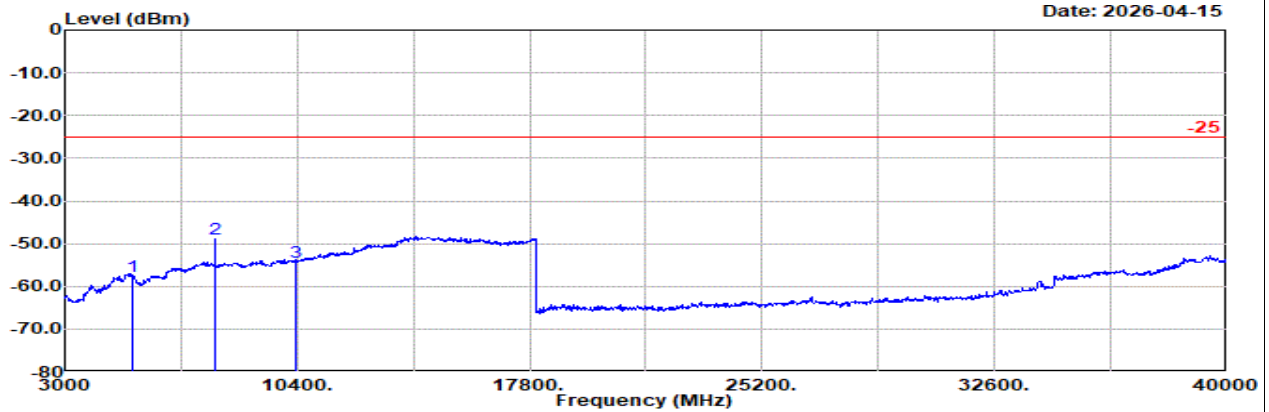


Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n38 20M Ch519000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	5173.00	-57.76	RMS	32.50	-21.70	2.04	-95.23	24.63	-25.00	-32.76	Horizontal
2	7759.00	-48.99	RMS	36.60	-21.38	1.56	-95.23	29.46	-25.00	-23.99	Horizontal
3	10345.00	-54.21	RMS	37.39	-21.74	1.71	-95.23	23.66	-25.00	-29.21	Horizontal

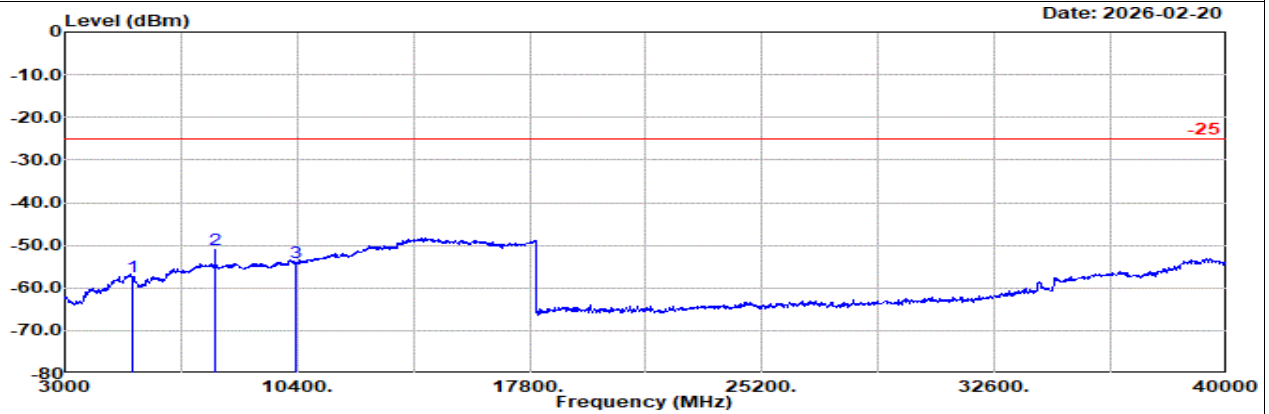

Site : 03CH21-HY

Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE Band 5 10M Ch20525 1RB0 QPSK

: SA n38 20M Ch519000 1RB1 BPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	5173.00	-57.50	RMS	32.50	-21.70	2.04	-95.23	24.89	-25.00	-32.50	Vertical
2	7759.00	-51.15	RMS	36.60	-21.38	1.56	-95.23	27.30	-25.00	-26.15	Vertical
3	10345.00	-53.94	RMS	37.39	-21.74	1.71	-95.23	23.93	-25.00	-28.94	Vertical




Ant. 8+1

Part 27M Mode 16


EN-DC B5+n38 10M + 20M Ch20525 1RB0 QPSK + Ch522000 1RB1 BPSK

H

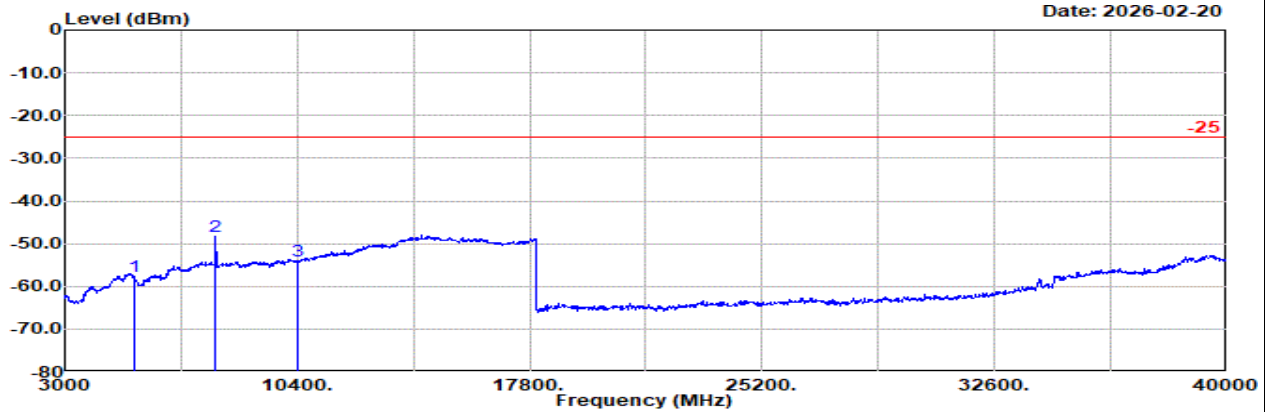

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n38 20M Ch522000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	5203.00	-57.75	RMS	32.49	-21.72	1.99	-95.23	24.72	-25.00	-32.75	Horizontal
2	7804.00	-48.16	RMS	36.60	-21.43	1.54	-95.23	30.36	-25.00	-23.16	Horizontal
3	10405.00	-53.93	RMS	37.20	-21.77	1.72	-95.23	24.15	-25.00	-28.93	Horizontal

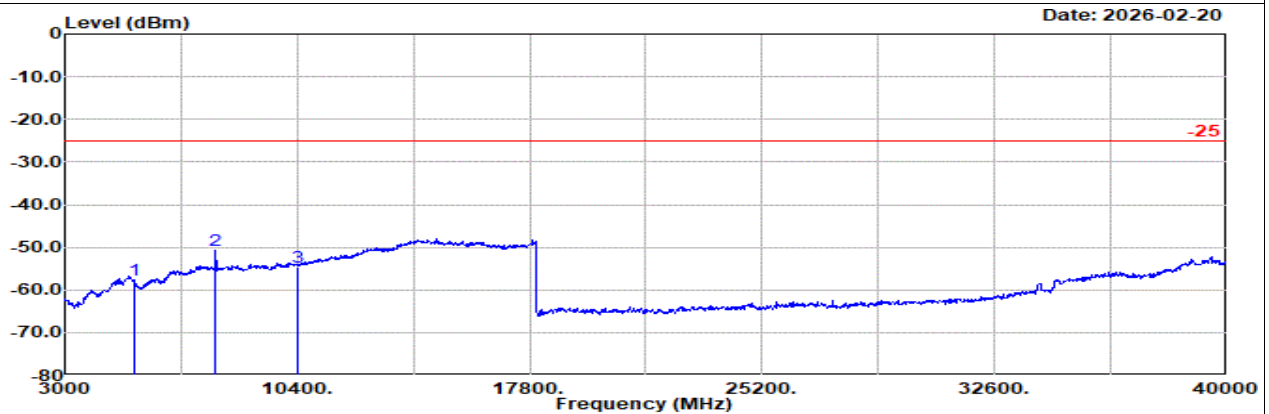

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n38 20M Ch522000 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			1			g			
1	5203.00	-57.53	RMS	32.49	-21.72	1.99	-95.23	24.94	-25.00	-32.53	Vertical
2	7804.00	-50.73	RMS	36.60	-21.43	1.54	-95.23	27.79	-25.00	-25.73	Vertical
3	10405.00	-54.51	RMS	37.20	-21.77	1.72	-95.23	23.57	-25.00	-29.51	Vertical




Ant. 8+1

Part 27M Mode 17


EN-DC B5+n41 10M + 20M Ch20525 1RB0 QPSK + Ch501204 1RB1 BPSK

L

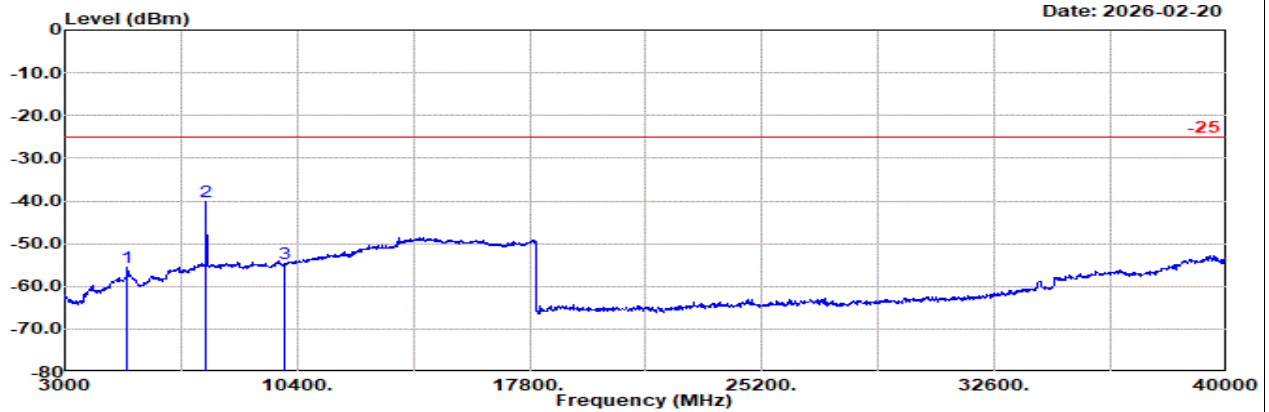


Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch501204 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4995.00	-55.54	RMS	32.78	-21.59	2.27	-95.23	26.23	-25.00	-30.54	Horizontal	
2	7492.00	-40.05	RMS	36.72	-21.17	1.53	-95.23	38.10	-25.00	-15.05	Horizontal	
3	9989.00	-54.74	RMS	37.08	-21.55	1.65	-95.23	23.31	-25.00	-29.74	Horizontal	

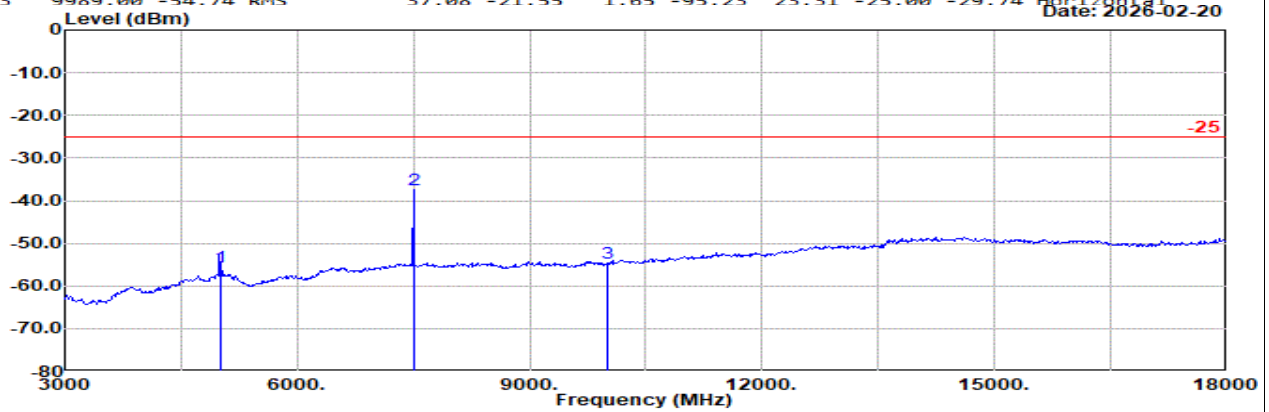


Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch502002 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	5003.00	-55.70	RMS	32.79	-21.58	2.27	-95.23	26.05	-25.00	-30.70	Horizontal	
2	7504.00	-37.39	RMS	36.69	-21.16	1.54	-95.23	40.77	-25.00	-12.39	Horizontal	
3	10005.00	-54.64	RMS	37.10	-21.54	1.65	-95.23	23.38	-25.00	-29.64	Horizontal	

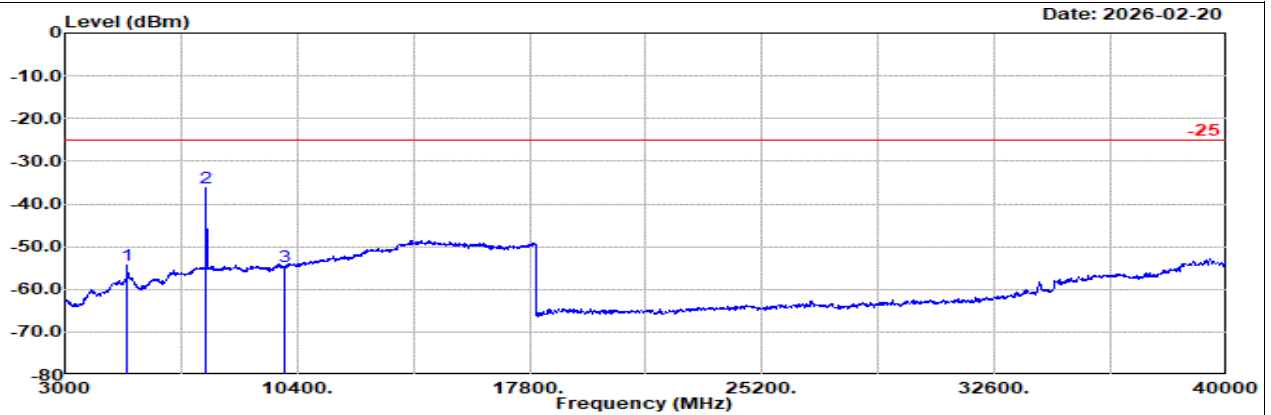

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch501204 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb dB/m	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
1	4995.00	-54.48	RMS	32.78	-21.59	2.27	-95.23	27.29	-25.00	-29.48	Vertical
2	7492.00	-36.32	RMS	36.72	-21.17	1.53	-95.23	41.83	-25.00	-11.32	Vertical
3	9989.00	-54.67	RMS	37.08	-21.55	1.65	-95.23	23.38	-25.00	-29.67	Vertical

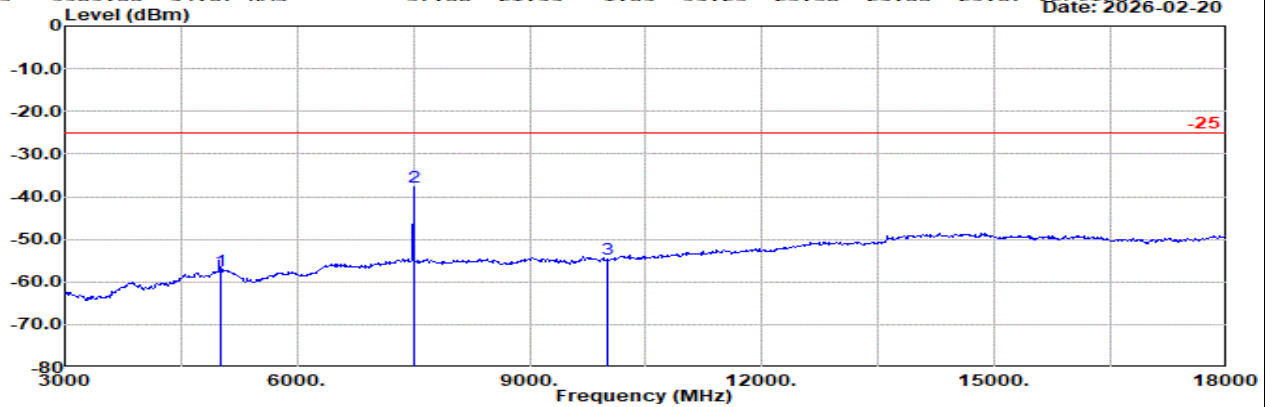

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch502002 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Factor	Amp\Cb dB/m	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
1	5003.00	-57.39	RMS	32.79	-21.58	2.27	-95.23	24.36	-25.00	-32.39	Vertical
2	7504.00	-37.62	RMS	36.69	-21.16	1.54	-95.23	40.54	-25.00	-12.62	Vertical
3	10005.00	-54.78	RMS	37.10	-21.54	1.65	-95.23	23.24	-25.00	-29.78	Vertical




Ant. 8+1

Part 27M Mode 17


EN-DC B5+n41 10M + 20M Ch20525 1RB0 QPSK + Ch518598 1RB1 BPSK

M

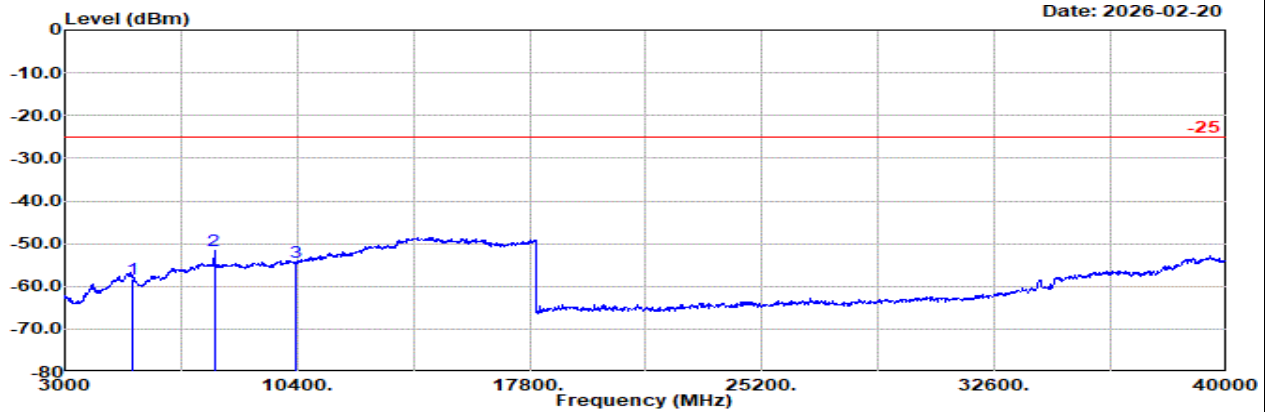

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch518598 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	5169.00	-58.18	RMS	32.50	-21.70	2.04	-95.23	24.21	-25.00	-33.18	Horizontal		
2	7753.00	-51.49	RMS	36.60	-21.38	1.56	-95.23	26.96	-25.00	-26.49	Horizontal		
3	10337.00	-54.19	RMS	37.37	-21.74	1.71	-95.23	23.70	-25.00	-29.19	Horizontal		

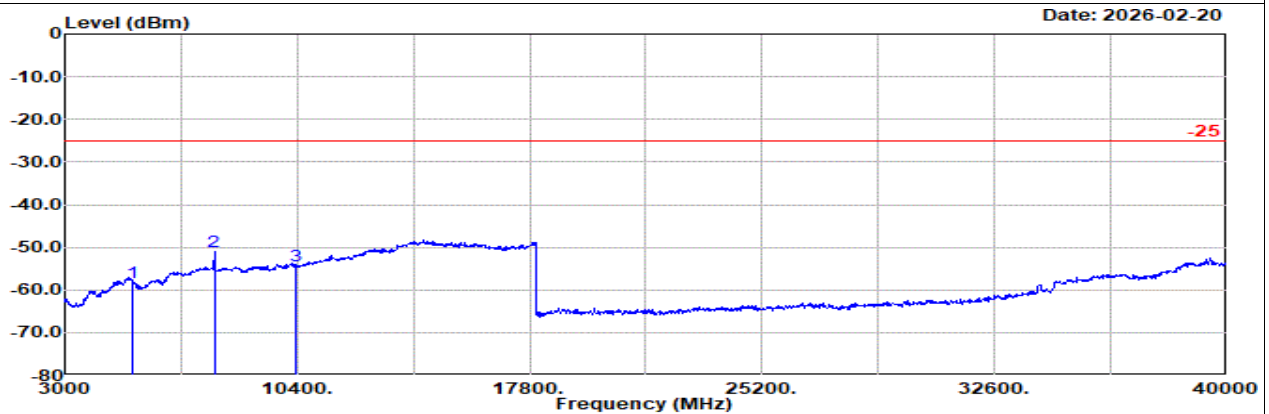

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch518598 1RB1 BPSK

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	5169.00	-58.14	RMS	32.50	-21.70	2.04	-95.23	24.25	-25.00	-33.14	Vertical		
2	7753.00	-50.91	RMS	36.60	-21.38	1.56	-95.23	27.54	-25.00	-25.91	Vertical		
3	10337.00	-54.19	RMS	37.37	-21.74	1.71	-95.23	23.70	-25.00	-29.19	Vertical		




Ant. 8+1

Part 27M Mode 17


EN-DC B5+n41 10M + 20M Ch20525 1RB0 QPSK + Ch535998 1RB1 BPSK

H

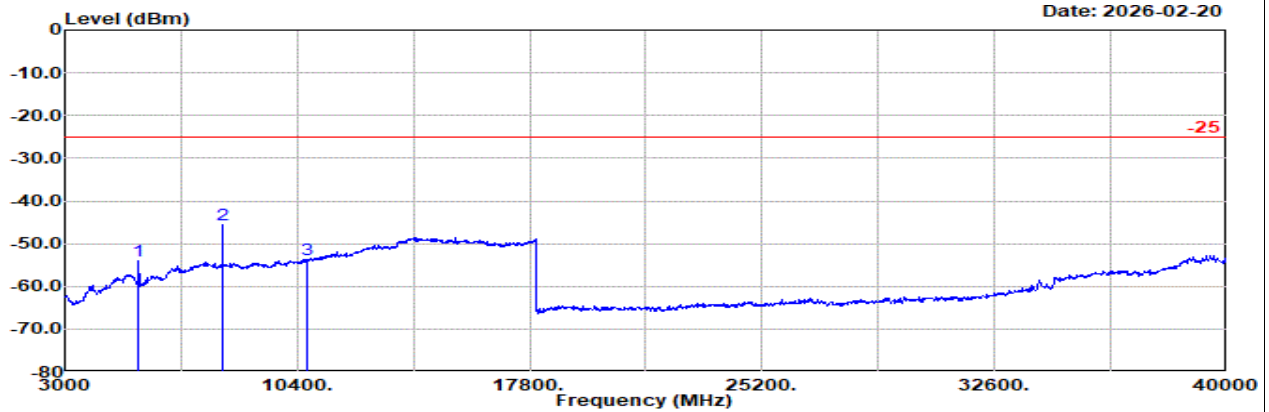

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch535998 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	5343.00	-54.11	RMS	32.30	-21.76	1.73	-95.23	28.85	-25.00	-29.11	Horizontal
2	8014.00	-45.57	RMS	36.53	-21.58	1.48	-95.23	33.23	-25.00	-20.57	Horizontal
3	10685.00	-53.63	RMS	37.50	-21.79	1.77	-95.23	24.12	-25.00	-28.63	Horizontal

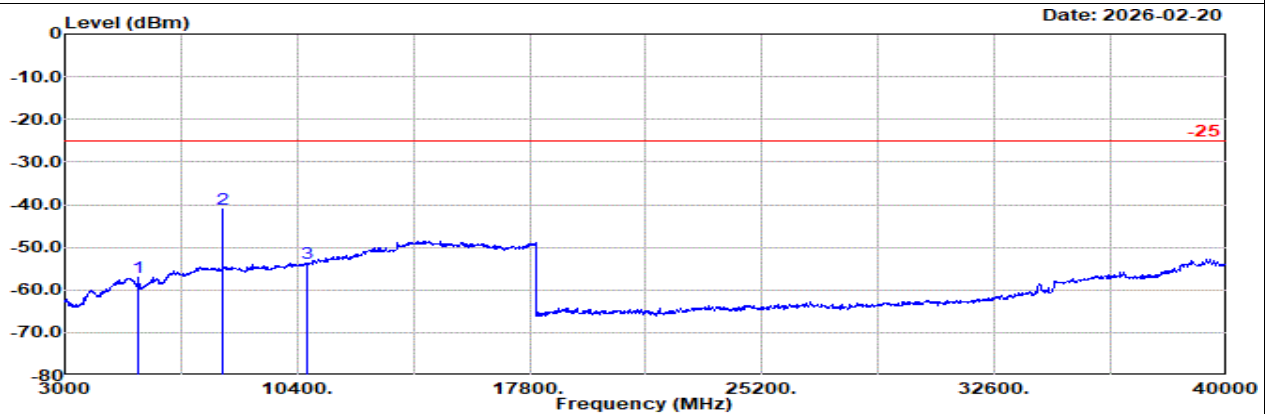

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n41 20M Ch535998 1RB1 BPSK

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	5343.00	-56.95	RMS	32.30	-21.76	1.73	-95.23	26.01	-25.00	-31.95	Vertical
2	8014.00	-40.94	RMS	36.53	-21.58	1.48	-95.23	37.86	-25.00	-15.94	Vertical
3	10685.00	-53.73	RMS	37.50	-21.79	1.77	-95.23	24.02	-25.00	-28.73	Vertical




Ant. 8

Part 270 Mode 18

NR SA n77 40M Ch648000 1RB1 BPSK

L

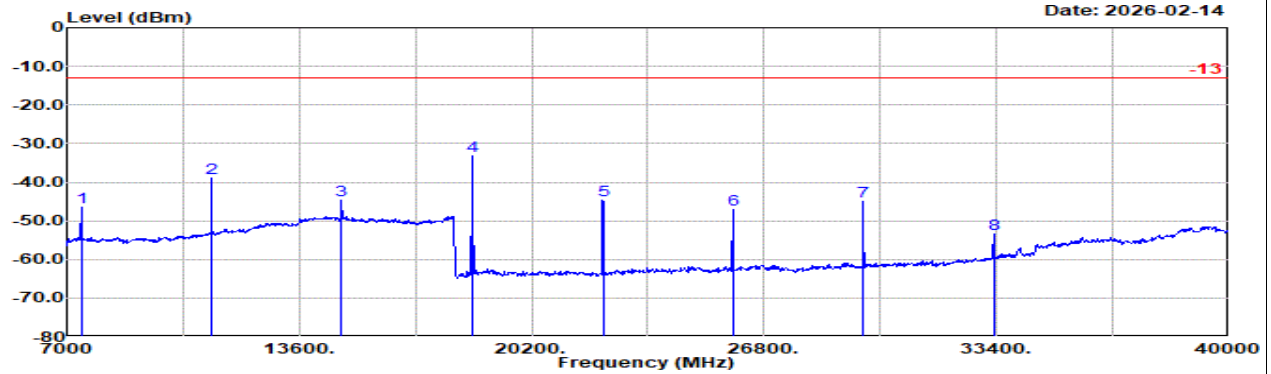


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n77 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-46.37	RMS	36.89	-21.25	1.70	-95.23	31.52	-13.00	-33.37	Horizontal
2	11107.00	-39.08	RMS	38.00	-21.72	1.91	-95.23	37.96	-13.00	-26.08	Horizontal
3	14809.00	-44.63	RMS	41.30	-23.35	2.19	-95.23	30.46	-13.00	-31.63	Horizontal
4	18528.00	-33.25	RMS	38.10	-39.02	-9.54	-95.23	72.44	-13.00	-20.25	Horizontal
5	22224.00	-44.75	RMS	38.35	-33.34	-9.54	-95.23	55.01	-13.00	-31.75	Horizontal
6	25920.00	-47.03	RMS	39.24	-30.99	-9.54	-95.23	49.49	-13.00	-34.03	Horizontal
7	29616.00	-45.05	RMS	40.10	-30.35	-9.54	-95.23	49.97	-13.00	-32.05	Horizontal
8	33334.00	-53.58	RMS	41.27	-26.32	-9.54	-95.23	36.24	-13.00	-40.58	Horizontal

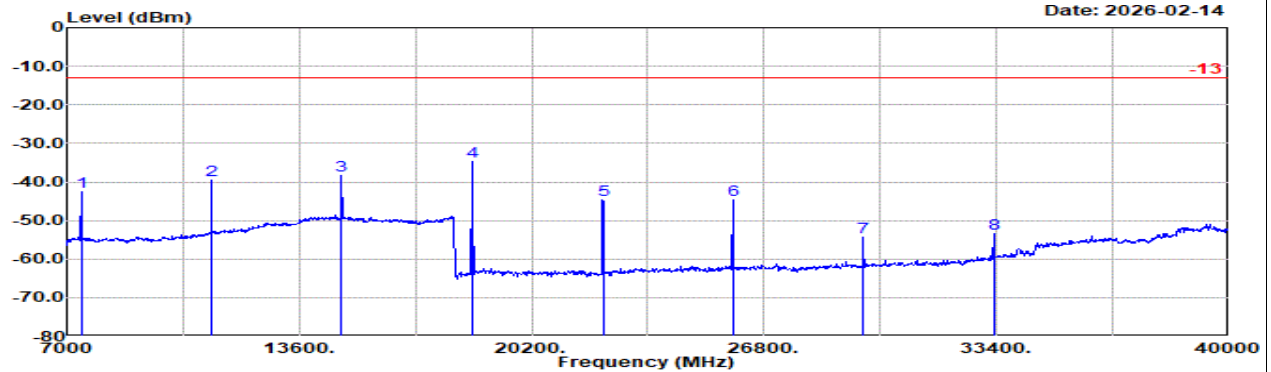

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n77 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-42.70	RMS	36.89	-21.25	1.70	-95.23	35.19	-13.00	-29.70	Vertical
2	11107.00	-39.57	RMS	38.00	-21.72	1.91	-95.23	37.47	-13.00	-26.57	Vertical
3	14809.00	-38.44	RMS	41.30	-23.35	2.19	-95.23	36.65	-13.00	-25.44	Vertical
4	18528.00	-34.66	RMS	38.10	-39.02	-9.54	-95.23	71.03	-13.00	-21.66	Vertical
5	22224.00	-44.74	RMS	38.35	-33.34	-9.54	-95.23	55.02	-13.00	-31.74	Vertical
6	25920.00	-44.62	RMS	39.24	-30.99	-9.54	-95.23	51.90	-13.00	-31.62	Vertical
7	29616.00	-54.22	RMS	40.10	-30.35	-9.54	-95.23	40.80	-13.00	-41.22	Vertical
8	33334.00	-53.52	RMS	41.27	-26.32	-9.54	-95.23	36.30	-13.00	-40.52	Vertical




Ant. 8

Part 270 Mode 18


NR SA n77 40M Ch656000 1RB1 BPSK

M

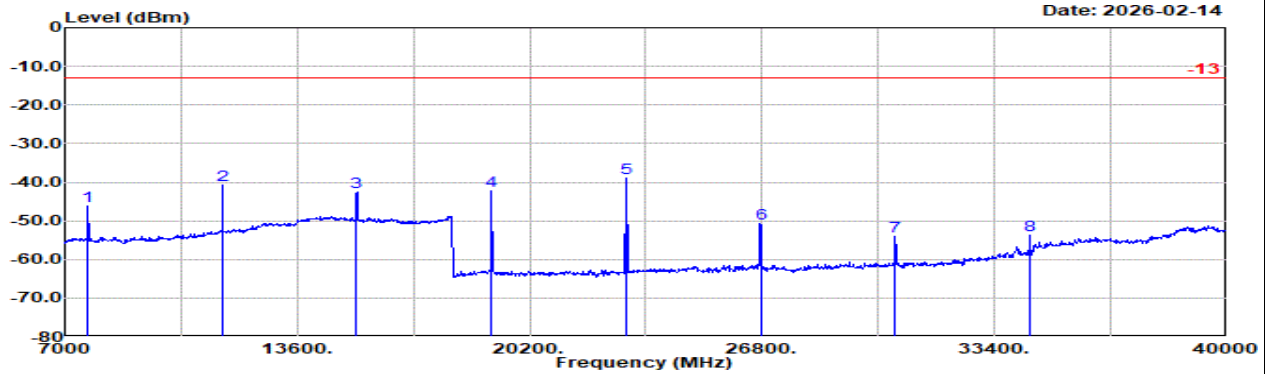

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: SA n77 40M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7645.00	-46.06	RMS	36.60	-21.26	1.90	-95.23	31.93	-13.00	-33.06	Horizontal
2	11467.00	-40.62	RMS	38.43	-21.75	1.97	-95.23	35.96	-13.00	-27.62	Horizontal
3	15289.00	-42.54	RMS	41.02	-23.48	2.17	-95.23	32.98	-13.00	-29.54	Horizontal
4	19122.00	-42.14	RMS	38.19	-38.52	-9.54	-95.23	62.96	-13.00	-29.14	Horizontal
5	22950.00	-38.86	RMS	39.00	-32.52	-9.54	-95.23	59.43	-13.00	-25.86	Horizontal
6	26756.00	-50.83	RMS	40.34	-31.00	-9.54	-95.23	44.60	-13.00	-37.83	Horizontal
7	30584.00	-54.03	RMS	40.37	-29.54	-9.54	-95.23	39.91	-13.00	-41.03	Horizontal
8	34412.00	-53.60	RMS	41.50	-24.81	-9.54	-95.23	34.48	-13.00	-40.60	Horizontal

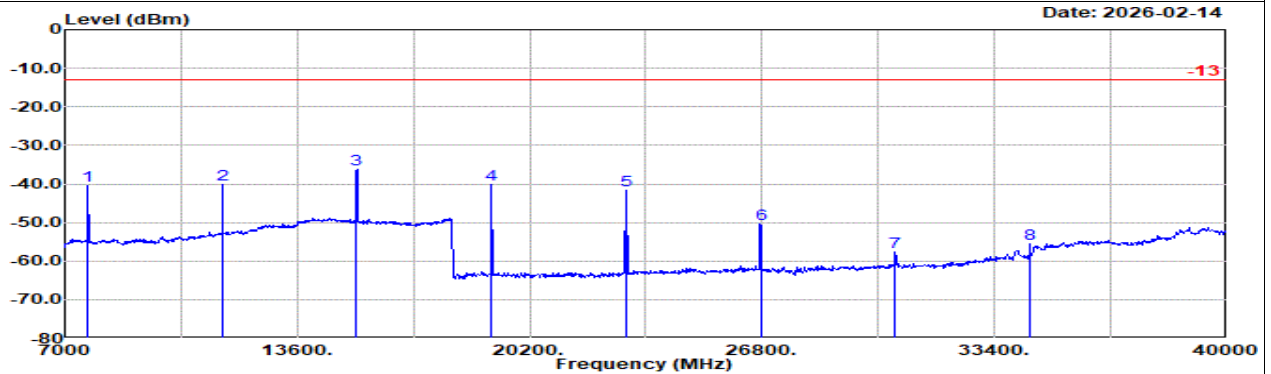

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: SA n77 40M Ch656000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7645.00	-40.38	RMS	36.60	-21.26	1.90	-95.23	37.61	-13.00	-27.38	Vertical
2	11467.00	-40.21	RMS	38.43	-21.75	1.97	-95.23	36.37	-13.00	-27.21	Vertical
3	15289.00	-36.10	RMS	41.02	-23.48	2.17	-95.23	39.42	-13.00	-23.10	Vertical
4	19122.00	-40.07	RMS	38.19	-38.52	-9.54	-95.23	65.03	-13.00	-27.07	Vertical
5	22928.00	-41.67	RMS	39.00	-32.55	-9.54	-95.23	56.65	-13.00	-28.67	Vertical
6	26756.00	-50.54	RMS	40.34	-31.00	-9.54	-95.23	44.89	-13.00	-37.54	Vertical
7	30584.00	-57.52	RMS	40.37	-29.54	-9.54	-95.23	36.42	-13.00	-44.52	Vertical
8	34412.00	-55.64	RMS	41.50	-24.81	-9.54	-95.23	32.44	-13.00	-42.64	Vertical




Ant. 8

Part 270 Mode 18

NR SA n77 40M Ch664000 1RB1 BPSK

H

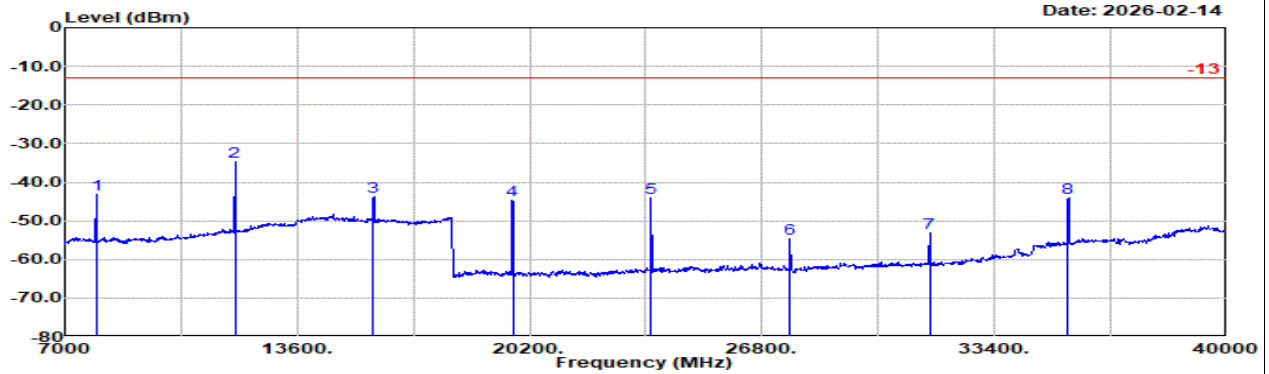


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n77 40M Ch664000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7885.00	-43.15	RMS	36.53	-21.49	1.78	-95.23	35.26	-13.00	-30.15	Horizontal
2	11827.00	-34.68	RMS	38.40	-21.86	2.04	-95.23	41.97	-13.00	-21.68	Horizontal
3	15769.00	-43.73	RMS	40.76	-23.52	2.14	-95.23	32.12	-13.00	-30.73	Horizontal
4	19716.00	-44.64	RMS	37.90	-37.56	-9.54	-95.23	59.79	-13.00	-31.64	Horizontal
5	23654.00	-44.06	RMS	39.00	-32.04	-9.54	-95.23	53.75	-13.00	-31.06	Horizontal
6	27592.00	-54.57	RMS	39.48	-31.04	-9.54	-95.23	41.76	-13.00	-41.57	Horizontal
7	31552.00	-53.14	RMS	40.40	-28.72	-9.54	-95.23	39.95	-13.00	-40.14	Horizontal
8	35490.00	-44.05	RMS	42.10	-23.90	-9.54	-95.23	42.52	-13.00	-31.05	Horizontal

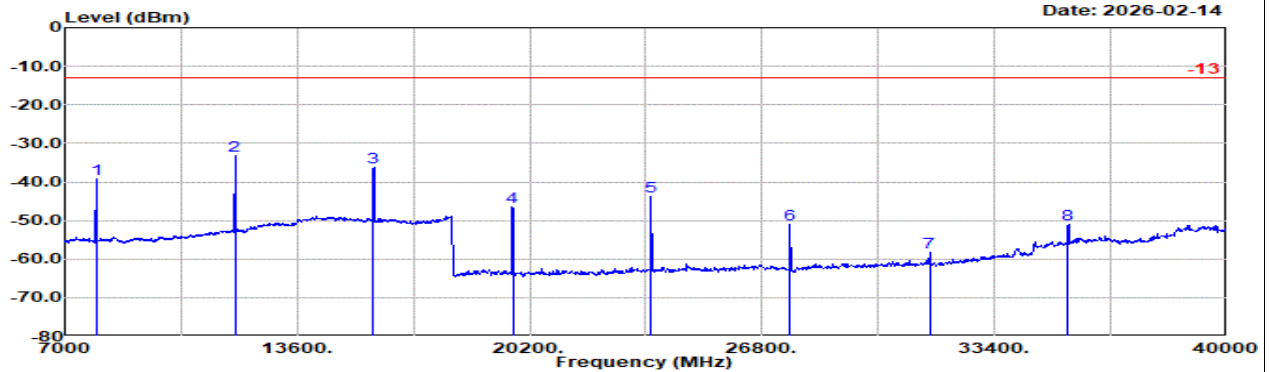

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n77 40M Ch664000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7885.00	-39.15	RMS	36.53	-21.49	1.78	-95.23	39.26	-13.00	-26.15	Vertical
2	11827.00	-33.23	RMS	38.40	-21.86	2.04	-95.23	43.42	-13.00	-20.23	Vertical
3	15769.00	-36.33	RMS	40.76	-23.52	2.14	-95.23	39.52	-13.00	-23.33	Vertical
4	19716.00	-46.46	RMS	37.90	-37.56	-9.54	-95.23	57.97	-13.00	-33.46	Vertical
5	23654.00	-43.71	RMS	39.00	-32.04	-9.54	-95.23	54.10	-13.00	-30.71	Vertical
6	27592.00	-51.00	RMS	39.48	-31.04	-9.54	-95.23	45.33	-13.00	-38.00	Vertical
7	31552.00	-58.16	RMS	40.40	-28.72	-9.54	-95.23	34.93	-13.00	-45.16	Vertical
8	35490.00	-51.06	RMS	42.10	-23.90	-9.54	-95.23	35.51	-13.00	-38.06	Vertical




Ant. 8

Part 270 Mode 19

NR SA n78 40M Ch648000 1RB1 BPSK

L

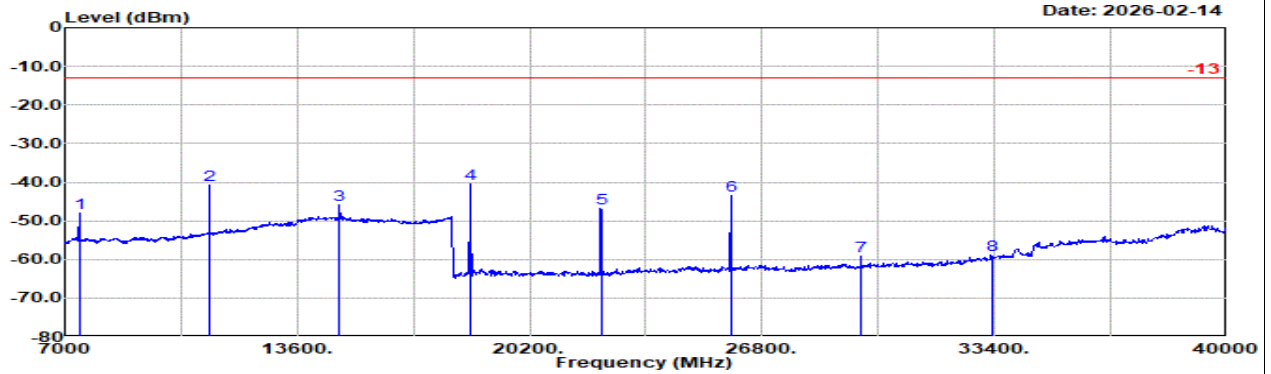


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n78 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-47.93	RMS	36.89	-21.25	1.70	-95.23	29.96	-13.00	-34.93	Horizontal
2	11107.00	-40.83	RMS	38.00	-21.72	1.91	-95.23	36.21	-13.00	-27.83	Horizontal
3	14809.00	-45.82	RMS	41.30	-23.35	2.19	-95.23	29.27	-13.00	-32.82	Horizontal
4	18528.00	-40.32	RMS	38.10	-39.02	-9.54	-95.23	65.37	-13.00	-27.32	Horizontal
5	22224.00	-46.75	RMS	38.35	-33.34	-9.54	-95.23	53.01	-13.00	-33.75	Horizontal
6	25920.00	-43.40	RMS	39.24	-30.99	-9.54	-95.23	53.12	-13.00	-30.40	Horizontal
7	29616.00	-59.14	RMS	40.10	-30.35	-9.54	-95.23	35.88	-13.00	-46.14	Horizontal
8	33312.00	-58.77	RMS	41.22	-26.36	-9.54	-95.23	31.14	-13.00	-45.77	Horizontal

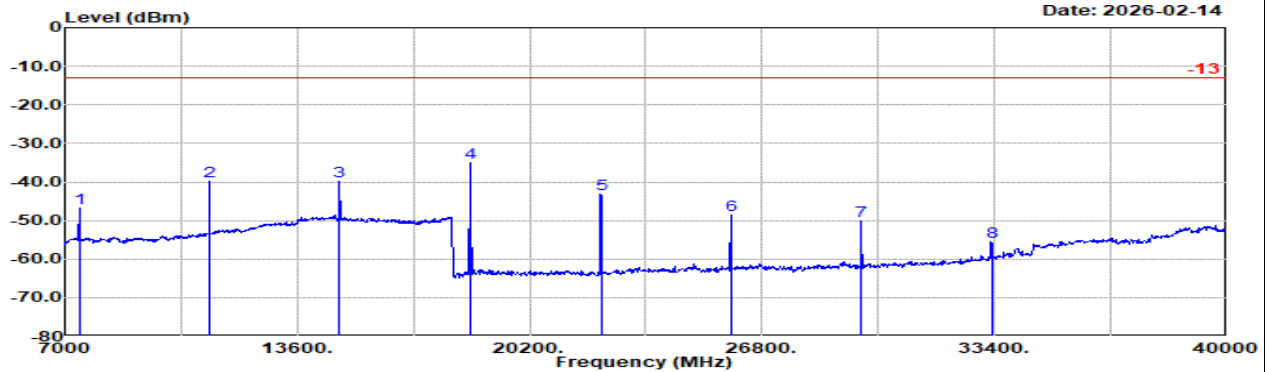

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n78 40M Ch648000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	7405.00	-46.67	RMS	36.89	-21.25	1.70	-95.23	31.22	-13.00	-33.67	Vertical
2	11107.00	-39.77	RMS	38.00	-21.72	1.91	-95.23	37.33	-13.00	-26.71	Vertical
3	14809.00	-39.77	RMS	41.30	-23.35	2.19	-95.23	35.32	-13.00	-26.77	Vertical
4	18528.00	-34.92	RMS	38.10	-39.02	-9.54	-95.23	70.77	-13.00	-21.92	Vertical
5	22224.00	-43.24	RMS	38.35	-33.34	-9.54	-95.23	56.52	-13.00	-30.24	Vertical
6	25920.00	-48.52	RMS	39.24	-30.99	-9.54	-95.23	48.00	-13.00	-35.52	Vertical
7	29616.00	-50.04	RMS	40.10	-30.35	-9.54	-95.23	44.98	-13.00	-37.04	Vertical
8	33312.00	-55.62	RMS	41.22	-26.36	-9.54	-95.23	34.29	-13.00	-42.62	Vertical




Ant. 8

Part 270 Mode 19

NR SA n78 40M Ch650000 1RB1 BPSK

M

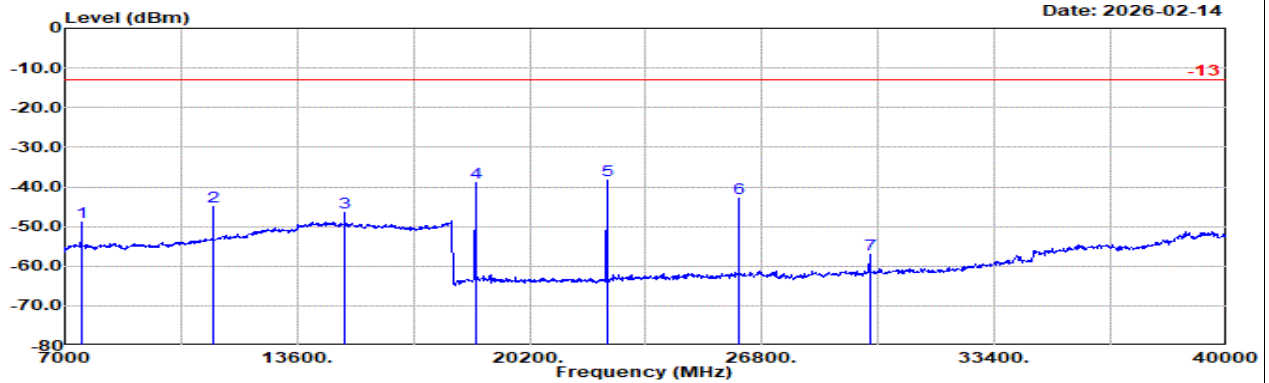


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n78 40M Ch650000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7465.00	-48.89	RMS	36.77	-21.19	1.78	-95.23	-95.23	28.98	-13.00	-35.89	Horizontal
2	11197.00	-45.00	RMS	38.00	-21.73	1.93	-95.23	-95.23	32.03	-13.00	-32.00	Horizontal
3	14929.00	-46.61	RMS	41.20	-23.46	2.18	-95.23	-95.23	28.70	-13.00	-33.61	Horizontal
4	18660.00	-38.90	RMS	38.20	-38.94	-9.54	-95.23	-95.23	66.61	-13.00	-25.90	Horizontal
5	22400.00	-38.29	RMS	38.40	-33.18	-9.54	-95.23	-95.23	61.26	-13.00	-25.29	Horizontal
6	26140.00	-42.83	RMS	39.30	-30.99	-9.54	-95.23	-95.23	53.63	-13.00	-29.83	Horizontal
7	29858.00	-57.12	RMS	40.10	-30.07	-9.54	-95.23	-95.23	37.62	-13.00	-44.12	Horizontal

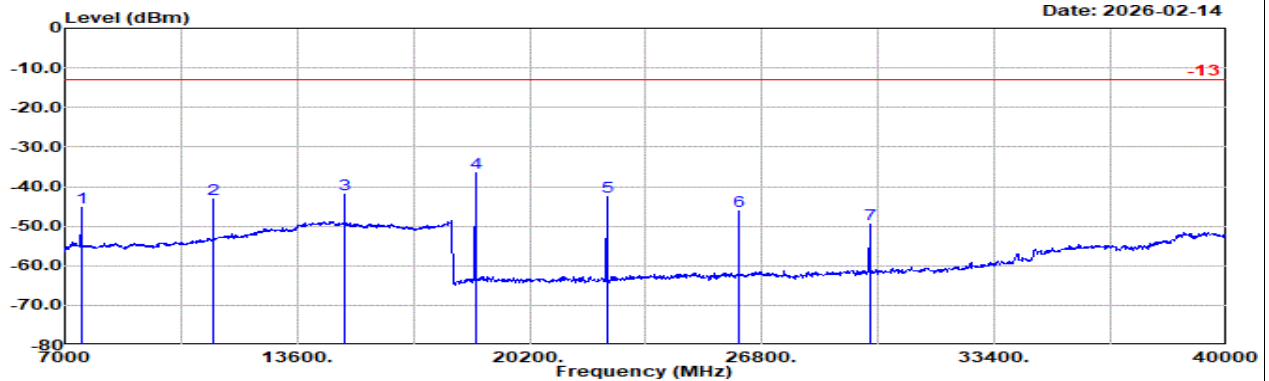

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n78 40M Ch650000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Reading	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7465.00	-45.31	RMS	36.77	-21.19	1.78	-95.23	-95.23	32.56	-13.00	-32.31	Vertical
2	11197.00	-43.06	RMS	38.00	-21.73	1.93	-95.23	-95.23	33.97	-13.00	-30.06	Vertical
3	14929.00	-41.86	RMS	41.20	-23.46	2.18	-95.23	-95.23	33.45	-13.00	-28.86	Vertical
4	18660.00	-36.68	RMS	38.20	-38.94	-9.54	-95.23	-95.23	68.83	-13.00	-23.68	Vertical
5	22400.00	-42.49	RMS	38.40	-33.18	-9.54	-95.23	-95.23	57.06	-13.00	-29.49	Vertical
6	26140.00	-46.25	RMS	39.30	-30.99	-9.54	-95.23	-95.23	50.21	-13.00	-33.25	Vertical
7	29858.00	-49.46	RMS	40.10	-30.07	-9.54	-95.23	-95.23	45.28	-13.00	-36.46	Vertical




Ant. 8

Part 270 Mode 19

NR SA n78 40M Ch652000 1RB1 BPSK

H

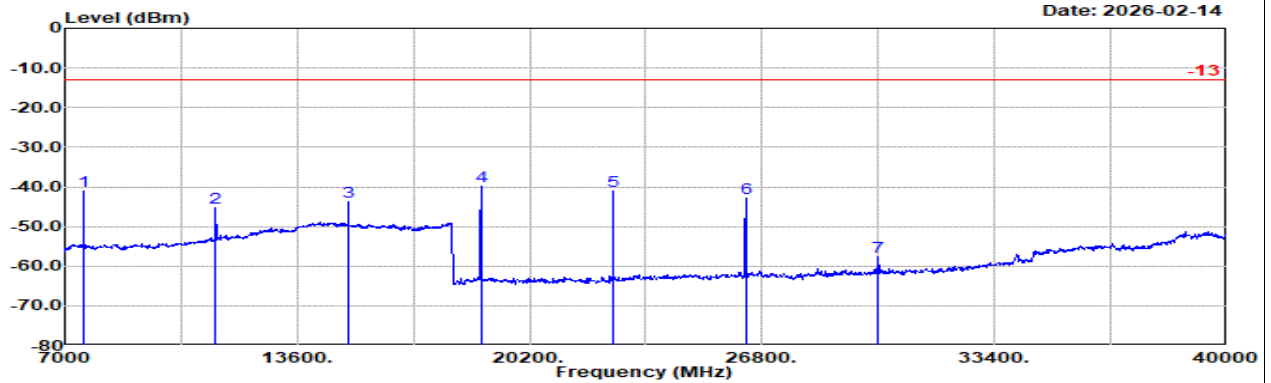


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: SA n78 40M Ch652000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7525.00	-41.12	RMS	36.65	-21.17	1.87	-95.23	36.77	-13.00	-28.12	Horizontal	
2	11287.00	-45.42	RMS	38.27	-21.74	1.94	-95.23	31.34	-13.00	-32.42	Horizontal	
3	15049.00	-43.63	RMS	41.00	-23.52	2.18	-95.23	31.94	-13.00	-30.63	Horizontal	
4	18814.00	-39.94	RMS	38.23	-38.86	-9.54	-95.23	65.46	-13.00	-26.94	Horizontal	
5	22576.00	-41.00	RMS	38.60	-33.00	-9.54	-95.23	58.17	-13.00	-28.00	Horizontal	
6	26338.00	-42.72	RMS	39.55	-31.03	-9.54	-95.23	53.53	-13.00	-29.72	Horizontal	
7	30100.00	-57.73	RMS	40.20	-29.84	-9.54	-95.23	36.68	-13.00	-44.73	Horizontal	

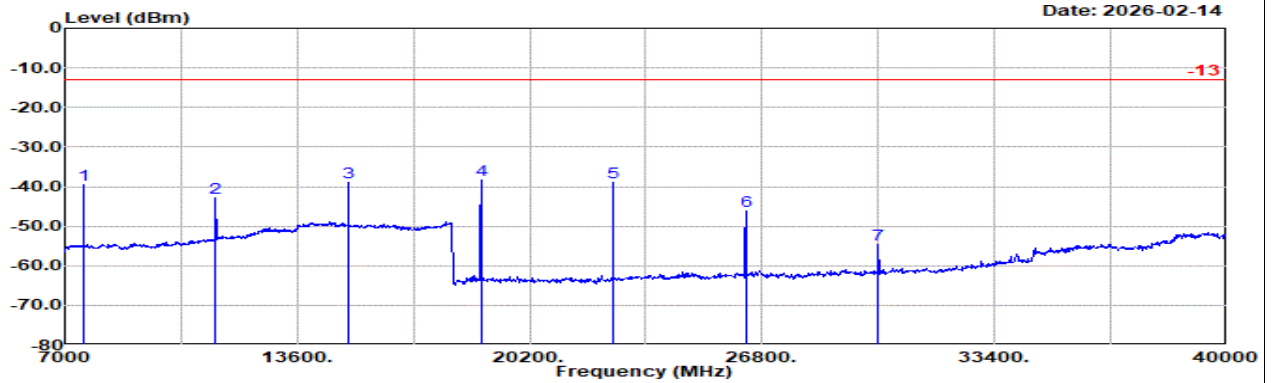

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: SA n78 40M Ch652000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7525.00	-39.47	RMS	36.65	-21.17	1.87	-95.23	38.42	-13.00	-26.47	Vertical	
2	11287.00	-42.73	RMS	38.27	-21.74	1.94	-95.23	34.03	-13.00	-29.73	Vertical	
3	15049.00	-39.09	RMS	41.00	-23.52	2.18	-95.23	36.48	-13.00	-26.09	Vertical	
4	18814.00	-38.49	RMS	38.23	-38.86	-9.54	-95.23	66.91	-13.00	-25.49	Vertical	
5	22576.00	-38.99	RMS	38.60	-33.00	-9.54	-95.23	60.18	-13.00	-25.99	Vertical	
6	26338.00	-46.18	RMS	39.55	-31.03	-9.54	-95.23	50.07	-13.00	-33.18	Vertical	
7	30100.00	-54.73	RMS	40.20	-29.84	-9.54	-95.23	39.68	-13.00	-41.73	Vertical	




Ant. 8+9

Part 270 Mode 20


EN-DC B5+n77 10M + 40M Ch20525 1RB0 QPSK + Ch648000 1RB1 BPSK

L

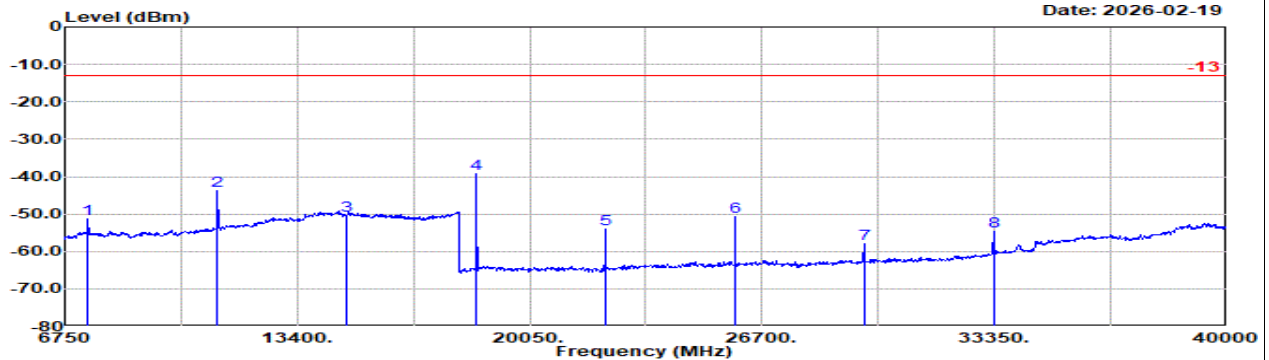

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n77 40M Ch648000 1RB1 BPSK

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	1			g	dBm	dB	
1	7405.00	-51.27 RMS	36.89	-21.25	1.70	-95.23	26.62	-13.00	-38.27	Horizontal
2	11107.00	-43.65 RMS	38.00	-21.72	1.91	-95.23	33.39	-13.00	-30.65	Horizontal
3	14809.00	-50.31 RMS	41.30	-23.35	2.19	-95.23	24.78	-13.00	-37.31	Horizontal
4	18528.00	-39.21 RMS	38.10	-39.02	-9.54	-95.23	66.48	-13.00	-26.21	Horizontal
5	22224.00	-54.01 RMS	38.35	-33.34	-9.54	-95.23	45.75	-13.00	-41.01	Horizontal
6	25920.00	-50.78 RMS	39.24	-30.99	-9.54	-95.23	45.74	-13.00	-37.78	Horizontal
7	29616.00	-57.83 RMS	40.10	-30.35	-9.54	-95.23	37.19	-13.00	-44.83	Horizontal
8	33334.00	-54.50 RMS	41.27	-26.32	-9.54	-95.23	35.32	-13.00	-41.50	Horizontal

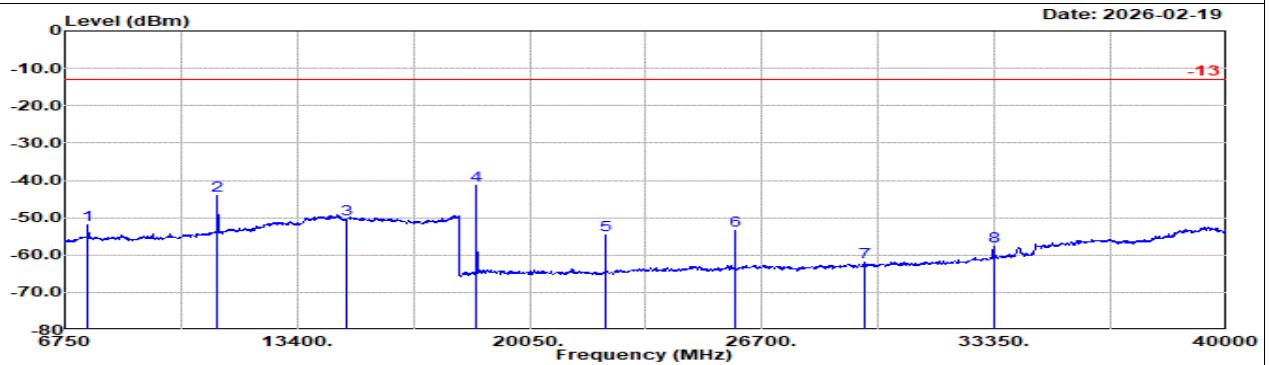

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical
: LTE B5 10M Ch20525 1RB0 QPSK
: SA n77 40M Ch648000 1RB1 BPSK

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	1			g	dBm	dB	
1	7405.00	-52.07 RMS	36.89	-21.25	1.70	-95.23	25.82	-13.00	-39.07	Vertical
2	11107.00	-43.95 RMS	38.00	-21.72	1.91	-95.23	33.09	-13.00	-30.95	Vertical
3	14809.00	-50.27 RMS	41.30	-23.35	2.19	-95.23	24.82	-13.00	-37.27	Vertical
4	18528.00	-41.24 RMS	38.10	-39.02	-9.54	-95.23	64.45	-13.00	-28.24	Vertical
5	22224.00	-54.70 RMS	38.35	-33.34	-9.54	-95.23	45.06	-13.00	-41.70	Vertical
6	25920.00	-53.40 RMS	39.24	-30.99	-9.54	-95.23	43.12	-13.00	-40.40	Vertical
7	29616.00	-61.83 RMS	40.10	-30.35	-9.54	-95.23	33.19	-13.00	-48.83	Vertical
8	33334.00	-57.52 RMS	41.27	-26.32	-9.54	-95.23	32.30	-13.00	-44.52	Vertical




Ant. 8+9

Part 270 Mode 20

EN-DC B5+n77 10M + 40M Ch20525 1RB0 QPSK + Ch656000 1RB1 BPSK

M

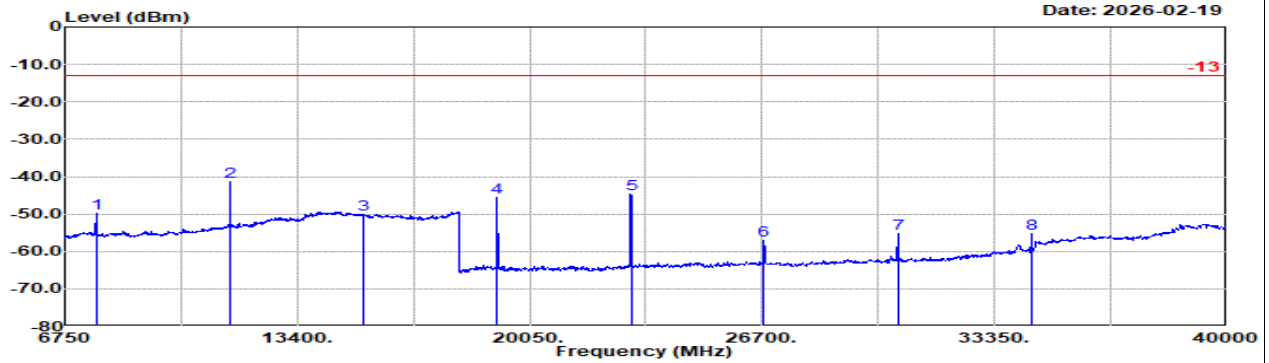


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n77 40M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	1			g	dBm	dB	
1	7645.00	-49.92 RMS	36.60	-21.26	1.90	-95.23	28.07	-13.00	-36.92	Horizontal
2	11467.00	-41.22 RMS	38.43	-21.75	1.97	-95.23	35.36	-13.00	-28.22	Horizontal
3	15289.00	-50.17 RMS	41.02	-23.48	2.17	-95.23	25.35	-13.00	-37.17	Horizontal
4	19122.00	-45.69 RMS	38.19	-38.52	-9.54	-95.23	59.41	-13.00	-32.69	Horizontal
5	22950.00	-44.57 RMS	39.00	-32.52	-9.54	-95.23	53.72	-13.00	-31.57	Horizontal
6	26756.00	-56.98 RMS	40.34	-31.00	-9.54	-95.23	38.45	-13.00	-43.98	Horizontal
7	30584.00	-55.25 RMS	40.37	-29.54	-9.54	-95.23	38.69	-13.00	-42.25	Horizontal
8	34412.00	-55.25 RMS	41.50	-24.81	-9.54	-95.23	32.83	-13.00	-42.25	Horizontal

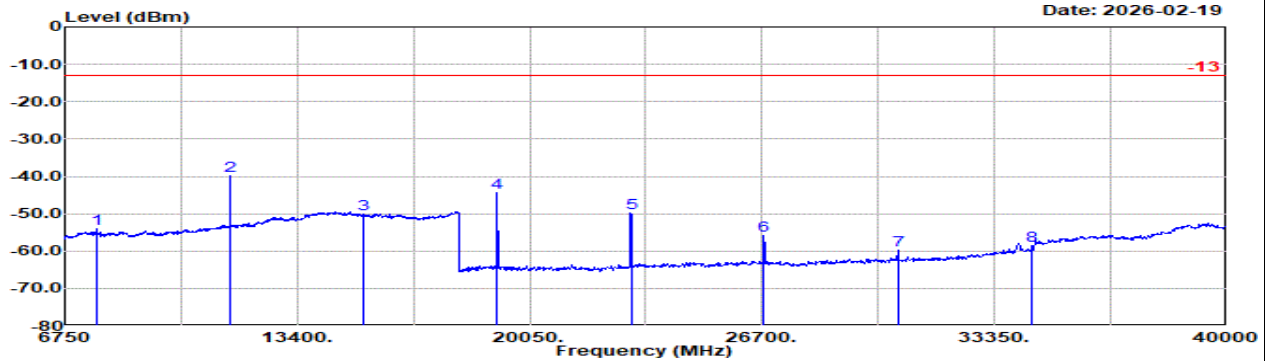

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: LTE B5 10M Ch20525 1RB0 QPSK

: SA n77 40M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		Factor	1			g	dBm	dB	
1	7645.00	-54.08 RMS	36.60	-21.26	1.90	-95.23	23.91	-13.00	-41.08	Vertical
2	11467.00	-39.78 RMS	38.43	-21.75	1.97	-95.23	36.80	-13.00	-26.78	Vertical
3	15289.00	-50.15 RMS	41.02	-23.48	2.17	-95.23	25.37	-13.00	-37.15	Vertical
4	19122.00	-44.44 RMS	38.19	-38.52	-9.54	-95.23	60.66	-13.00	-31.44	Vertical
5	22950.00	-49.76 RMS	39.00	-32.52	-9.54	-95.23	48.53	-13.00	-36.76	Vertical
6	26756.00	-55.90 RMS	40.34	-31.00	-9.54	-95.23	39.53	-13.00	-42.90	Vertical
7	30584.00	-59.78 RMS	40.37	-29.54	-9.54	-95.23	34.16	-13.00	-46.78	Vertical
8	34412.00	-58.48 RMS	41.50	-24.81	-9.54	-95.23	29.60	-13.00	-45.48	Vertical