




FCC RADIO TEST REPORT

FCC ID : UZ7TCX010
Equipment : Touch Computer
Brand Name : ZEBRA
Model Name : TCX010
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Oct. 03, 2025 and testing was performed from Oct. 14, 2025 to Dec. 06, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	10
1.4 Testing Location	11
1.5 Applicable Standards.....	11
2 Test Configuration of Equipment Under Test	12
2.1 Carrier Frequency and Channel	13
2.2 Test Mode.....	16
2.3 Connection Diagram of Test System.....	20
2.4 Support Unit used in test configuration and system	21
2.5 EUT Operation Test Setup	21
2.6 Measurement Results Explanation Example.....	21
3 Test Result	22
3.1 26dB & 99% Occupied Bandwidth Measurement	22
3.2 Fundamental Maximum EIRP Measurement	23
3.3 Fundamental Power Spectral Density Measurement	24
3.4 In-Band Emissions (Channel Mask)	26
3.5 Transmit Power Control (TPC)	28
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements.....	33
4 List of Measuring Equipment.....	34
5 Measurement Uncertainty	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR571515-01I	01	Initial issue of report	Dec. 12, 2025
FR571515-01I	02	Revised Product Feature of Equipment Under Test, Test Mode, 26dB & 99% Occupied Bandwidth Measurement, Appendix A2, and Appendix D. This report is an updated version, replacing the report issued on Dec. 12, 2025.	Jan. 02, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a) (9)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a) (9)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	See Note
3.5	15.407(d)(10)	Transmit Power Control (TPC)	Pass	-
-	15.407(b)	Unwanted Emissions	Pass	See Note
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Shannon Huang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	ZEBRA
Model Name	TCX010
FCC ID	UZ7TCX010
EUT supports Radios application	NFC/UHF RFID WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be ETH20/ ETH 40/ ETH 80/ ETH 160/ ETH 320 Bluetooth BR/EDR/LE
HW Version	eris_A15_userdebug_GMS_RelKey_2025-10-07-205955_main_SE
SW Version	eris_A15_userdebug_GMS_RelKey_2025-10-07-205955_main_SE
MFD	30-Sep-25
EUT Stage	Identical Prototype
Equipment Type	Very Low Power

<Sample list>

	Scanner	Camera	Bumper
Sample 1	SE4730	Main	w/o
Sample 2	SE4780	Main+Indirect Time-of-Flight	w/o
Sample 3	SE4780	Main+Ultra wide Camera	w/o
Sample 4	SE4730	Main+Indirect Time-of-Flight	w/o
Sample 5	SE4730	Main+Ultra wide Camera	w/o
Sample 6	SE4730	Main	w/
Sample 7	SE4780	Main+Indirect Time-of-Flight	w/
Sample 8	SE4780	Main+Ultra wide Camera	w/
Sample 9	SE4730	Main+Indirect Time-of-Flight	w/
Sample 10	SE4730	Main+Ultra wide Camera	w/



Specification of Accessories				
AC Adapter 1 (TYPE C Wall Charger 1)	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US PWR-WUA5V45W1EU
AC Adapter 2 (TYPE A Wall Charger 2)	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Trigger Handle 1	Brand Name	Zebra	Part Number	TRG-TC5A-ELEC-01
Trigger Handle 2	Brand Name	Zebra	Part Number	TRG-TC7A-ELEC-01
Arm Mount 1	Brand Name	Zebra	Part Number	SG-TC5A-WMADP-01
Arm Mount 2	Brand Name	Zebra	Part Number	SG-TC5A-WMADP2-01
Soft Holster	Brand Name	Zebra	Part Number	SG-NGTC5TC7-HLSTR-01
Rugged boot	Brand Name	Zebra	Part Number	SG-TC5AEXO-01
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Earphone 3 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
Battery	Brand Name	Zebra	Part Number	BT-000535-0020
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
USB Cable 1 USB-C to C Cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 USB-A to C Cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5925 MHz ~ 6425 MHz 6425 MHz ~ 6525 MHz 6525 MHz ~ 6875 MHz 6875 MHz ~ 7125 MHz
Maximum Output Power <CDD Mode>	MIMO <Ant. 7+6> <5925 MHz ~ 6425 MHz> 802.11a: 4.37 dBm / 0.0027 W 802.11ac VHT160: 3.17 dBm / 0.0021 W <6425 MHz ~ 6525 MHz> 802.11a: 4.23 dBm / 0.0027 W <6525 MHz ~ 6875 MHz> 802.11a: 4.61 dBm / 0.0029 W <6875 MHz ~ 7125 MHz> 802.11a: 4.58 dBm / 0.0029 W
Maximum Output Power <SDM Mode>	MIMO <Ant. 7+6> <5925 MHz ~ 6425 MHz> 802.11ac VHT160: 3.17 dBm / 0.0021 W 802.11ac HE20: 8.14 dBm / 0.0065 W 802.11ac HE40: 11.29 dBm / 0.0135 W 802.11ac HE80: 13.88 dBm / 0.0244 W 802.11ac HE160: 13.88 dBm / 0.0245 W <6425 MHz ~ 6525 MHz> 802.11ac HE40: 11.14 dBm / 0.0130 W 802.11ac HE80: 13.88 dBm / 0.0244 W 802.11ac HE160: 13.43 dBm / 0.0220 W <6525 MHz ~ 6875 MHz> 802.11ac HE20: 8.12 dBm / 0.0065 W 802.11ac HE40: 11.46 dBm / 0.0140 W 802.11ac HE80: 13.82 dBm / 0.0241 W 802.11ac HE160: 13.67 dBm / 0.0233 W <6875 MHz ~ 7125 MHz> 802.11ac HE20: 8.46 dBm / 0.0070 W 802.11ac HE40: 11.71 dBm / 0.0148 W 802.11ac HE80: 13.46 dBm / 0.0222 W 802.11ac HE160: 13.66 dBm / 0.0232 W
99% Occupied Bandwidth <CDD Mode>	<5925 MHz ~ 6425 MHz> <Ant. 7> : 802.11a: 17.71 MHz MIMO <Ant. 7> : 802.11a: 17.78 MHz MIMO <Ant. 6> : 802.11a: 25.09 MHz
Antenna Type	<Ant. 7> : PIFA Antenna <Ant. 6> : PIFA Antenna

Product Specification is subject to this standard	
Antenna Gain	<5925 MHz ~ 6425 MHz> : <Ant. 7>: 2.15 dBi <Ant. 6>: 3.17 dBi <6425 MHz ~ 6525 MHz> : <Ant. 7>: 2.15 dBi <Ant. 6>: 3.17 dBi <6525 MHz ~ 6875 MHz> : <Ant. 7>: 1.45 dBi <Ant. 6>: 2.20 dBi <6875 MHz ~ 7125 MHz > : <Ant. 7>: 0.89 dBi <Ant. 6>: 2.20 dBi
Type of Modulation	802.11b: DSSS (DBPSK/DQPSK/CCK) 802.11a/g/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax:OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be:OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096-QAM)

Remark:

1. MIMO Ant. 1+2 Directional Gain is a calculated result from MIMO Ant. 1 and MIMO Ant. 2. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 1 + Ant. 2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.
3. 802.11be Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)
	Ant 7 (dBi)	Ant 6 (dBi)		
5925 MHz ~ 6425 MHz	2.15	3.17	3.17	5.69
6425 MHz ~ 6525 MHz	2.15	3.17	3.17	5.69
6525 MHz ~ 6875 MHz	1.45	2.20	2.20	4.84
6875 MHz ~ 7125 MHz	0.89	2.20	2.20	4.58

Calculation example:

If a device has two antenna, $G_{ANT7}= 2.15$ dBi; $G_{ANT6}=3.17$ dBi

Directional gain of power measurement = $\max(2.15, 3.17) + 0 = 3.17$ dBi

Directional gain of PSD derived from formula which is

$10 \times \log \left\{ \left[10^{(2.15 \text{ dBi} / 20)} + 10^{(3.17 \text{ dBi} / 20)} \right]^2 / 2 \right\} = 5.69$ dBi

<For SDM Mode>

SDM mode all transmit signals are completely uncorrelated, then

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)d)ii)

The Directional gain = $10 \cdot \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

Where G1, G2....GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

				DG	DG
				for	for
		Ant 7	Ant 6	Power	PSD
		(dBi)	(dBi)	(dBi)	(dBi)
5925 MHz ~ 6425 MHz		2.15	3.17	3.17	2.69
6425 MHz ~ 6525 MHz		2.15	3.17	3.17	2.69
6525 MHz ~ 6875 MHz		1.45	2.20	2.20	1.84
6875 MHz ~ 7125 MHz		0.89	2.20	2.20	1.59

Calculation example:

If a device has two antenna, $G_{ANT7} = 2.15$ dBi; $G_{ANT6} = 3.17$ dBi

Directional gain is derived from formula which is

$$10 \times \log \{ \{ [10^{\wedge} (2.15 \text{ dBi} / 10) + 10^{\wedge} (3.17 \text{ dBi} / 10)] \} / 2 \}$$

$$= 2.69 \text{ dBi}$$

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, , the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.

The device WIFI MIMO support 1S2T (CDD & Tx Beamforming) (Nss=1) mode& SDM (2S2T :Nss=2) mode by manufacturer declared.

For 802.11a, it does not support SDM & Tx Beamforming so the correlated gain for CDD is applied.

For 802.11ax mode, in SDM mode the conducted power is set to 3dB higher than TXBF/CDD, Since the maximum array gain for a two antenna system is 3dB so the TXBF/CDD compliance is met by testing SDM mode as worst mode for LPI power mode.

802.11ax support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is not greater than CDD&SDM mode, so CDD&SDM mode covers Tx Beamforming mode.

The device supports 1S2T (CDD & Tx Beamforming) and 2S2T (SDM) mode;
1S2T: Nss=1, MIMO 2Tx; 2S2T: Nss=2, MIMO 2Tx.

802.11ax support full RU tone and partial RU tone, both full RU and partial are tested for conducted power/PSD in appendix A, for Channel Mask in section 3.4.5, all the other test case were performed with full RU with its maximum power/PSD.

- b. AC power line Conducted Emission was tested under maximum output power.



2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 320M	Channel	31							
	Freq. (MHz)	6105							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	63							
	Freq. (MHz)	6265							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							
BW 320M	Channel	127							
	Freq. (MHz)	6585							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	191							
	Freq. (MHz)	6905							



BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							

BW 20M	Channel	233							
	Freq. (MHz)	7115							

2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU ,M-RU and channel puncture.

The PSD of partial RU, M-RU and channel puncture are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT 40	MCS0
802.11be EHT 80	MCS0
802.11be EHT 160	MCS0
802.11be EHT 320	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G Link + Bluetooth Link + AC Adapter for Sample 1
Remark: 1. For Radiated Test Cases, the tests were performed with Battery 1 (1x) and Sample 1. 2. The detailed Radiated test modes are shown in Appendix C.	

MIMO <Ant. 6+7>

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11a	802.11a	802.11a	802.11a
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	-	233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT20	802.11be EHT20	802.11be EHT20	802.11be EHT20
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	-	-
					233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT40	802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	003	099	123	195
M	Middle	051	-	147	211
H	High	091	107	-	227
Straddle		-	115	187	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT80	802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	007	103	135	199
M	Middle	055		151	-
H	High	087		-	215
Straddle		-	-	183	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT160	802.11be EHT160	802.11be EHT160	802.11be EHT160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11be EHT320	802.11be EHT320	802.11be EHT320	802.11be EHT320
L	Low	031	-	-	-
M	Middle	-			
H	High	063			
Straddle		095	127	159	191

Remark: Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family.

80M channel puncturing 20M M-RU_RU484+RU242	1		242	484
	2	242		484
	3	484		242
	4	484	242	

160M channel puncturing 20M M-RU_RU996+RU484+RU242	1		242	484	996
	2	242		484	996
	3	484		242	996
	4	484	242		996
	5	996		242	484
	6	996	242		484
	7	996	484		242
	8	996	484	242	




160M channel puncturing 40M M-RU_RU996+RU484	1		484	996
	2	484		996
	3	996		484
	4	996	484	

320M channel puncturing 40M M-RU_RU484+RU996+RU996+RU996	1		484	996	996	996
	2	484		996	996	996
	3	996		484	996	996
	4	996	484		996	996
	5	996	996		484	996
	6	996	996	484		996
	7	996	996	996		484
	8	996	996	996	484	


320M channel puncturing 80M M-RU_RU996+RU996+RU996	1		996	996	996
	2	996		996	996
	3	996	996		996
	4	996	996	996	

320M channel puncturing 40M+80M M-RU_RU484+RU996+RU996	1		484	996	996	
	2	484		996	996	
	3	996		484	996	
	4	996	484		996	
	5	996	996		484	
	6	996	996	484		
	7			484	996	996
	8		484		996	996
	9		996		484	996
	10		996	484		996
	11		996	996		484
	12		996	996	484	

2.3 Connection Diagram of Test System

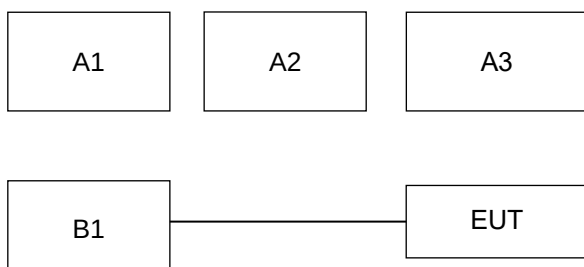

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	-	-	-	-	-	-
A1	BT Earphone	Bluetooth	X	-	-	-	-	-	-
A2	AP router	WiFi	X	-	-	-	-	-	-
A3	Notebook	WiFi	X	-	-	-	-	-	-
No.	Power Source	Connection Type	1	-	-	-	-	-	-
B1	AC : 120V/60Hz	AC Power Cable	X	-	-	-	-	-	-



Radiation WLAN TX Test Setup						
No.	Power Source	Connection Type	Test Mode			
			67-168	161	1-13	1-28
B1	AC : 120V/60Hz	AC Power Cable	X	X	X	X

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
2.	Notebook	Lenovo	IdeaPad Gaming 3 15IHU6	PD9AX201NG	N/A	Shielded, 1.8m
3.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
4.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.1 Version 4.0.170.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

For EIRP output power:

The EIRP output power result is derived from RF conducted power plus directional antenna gain.

EIRP = RF conducted power + directional antenna gain.

Following shows an offset computation example with conducted power 20.2 dBm and directional antenna gain 3dBi.

$$\begin{aligned}\text{EIRP(dBm)} &= \text{RF conducted power(dBm)} + \text{directional antenna gain(dBi)} \\ &= 20.2 + 3 = 23.2 \text{ (dBm)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(11) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

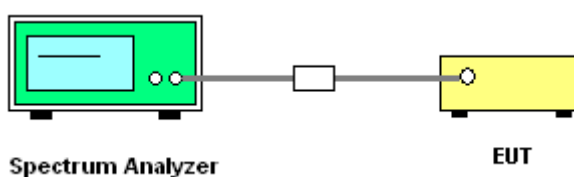

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

Note: The EBW spectrum setting is as following table for different nominal bandwidth.

setting	20MHz	40MHz	80MHz	160MHz	320MHz
RBW	500kHz	1MHz	2MHz	2MHz	5MHz
VBW	2MHz	3MHz	10MHz	10MHz	5MHz

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p must not exceed 14 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

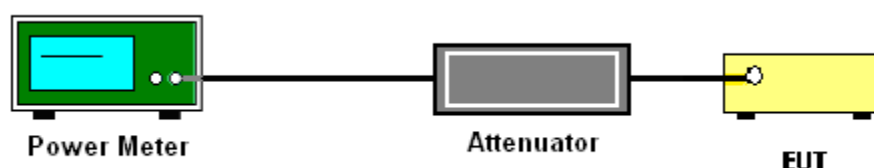

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

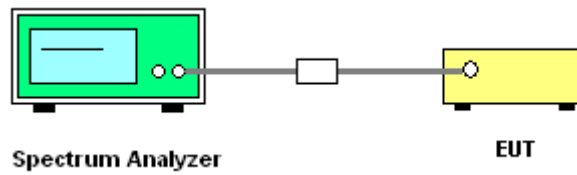

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

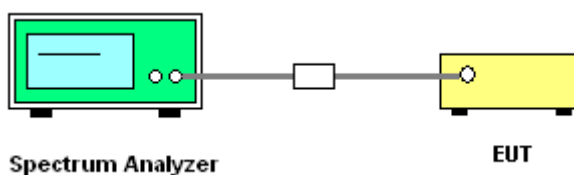

3.4.5 Test Result

Please refer to Appendix A.



3.5 Transmit Power Control (TPC)

3.5.1 Limit of Transmit Power Control (TPC)

<FCC 14-30 CFR 15.407>

(d)(10) Very low power devices operating in the 5.925-6.425 and 6.525-6.875 GHz bands shall employ a transmit power control (TPC) mechanism. A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedure:

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

Measure the PPSD and record it.

3.5.4 Test Setup

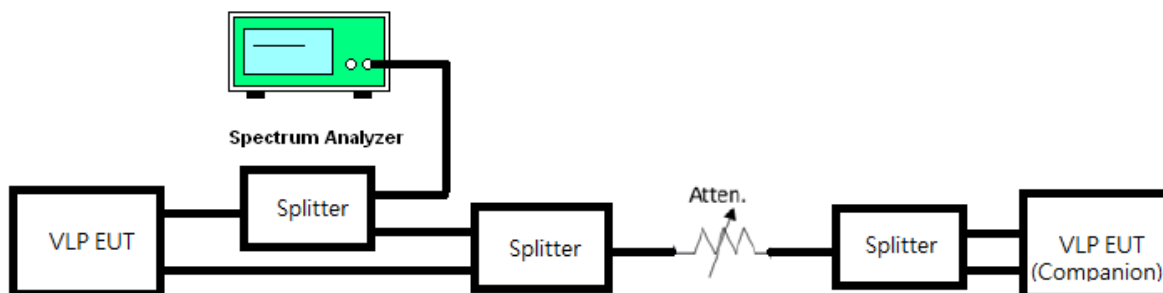

3.5.5 Test Result

The purpose of this test is to verify the relative power drop as the RSSI is increased.


If the conducted PSD delta is greater than 6dB then it ensures the EIRP PSD is at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

UNII-5 MIMO 2TX	HE20 6135MHz	Conducted PSD Ant 6 (6+7) (dBm/MHz)	Conducted PSD Ant 7 (6+7) (dBm/MHz)	Conducted PSD Ant 6+7 (dBm/MHz)	Antenna Gain Ant 6+7 (dBi)	EIRP PSD Ant 6+7 (dBm/MHz)
Low RSSI		-14.74	-13.88	-11.28		
High RSSI		-22.05	-19.68	-17.69	2.69	-15.00
Verdict [EIRP PSD < -11dBm/MHz]						Pass




Ant 6

High RSSI

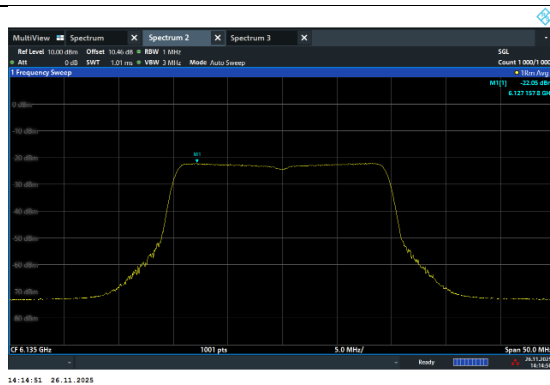


Low RSSI

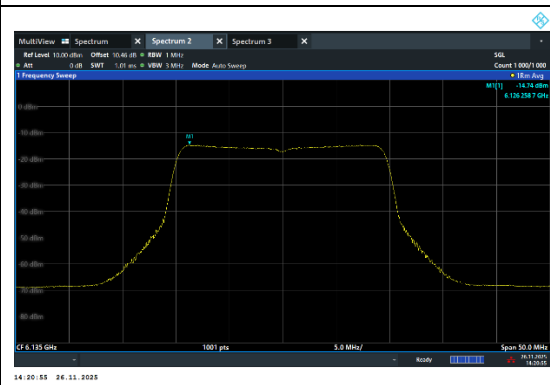


Ant 7

High RSSI

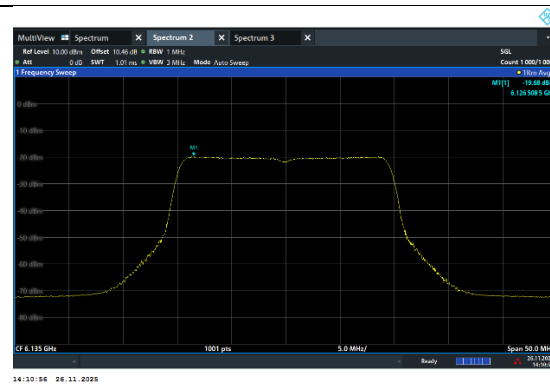

Low RSSI

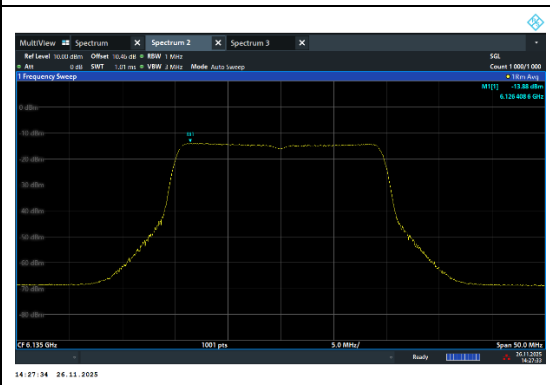

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

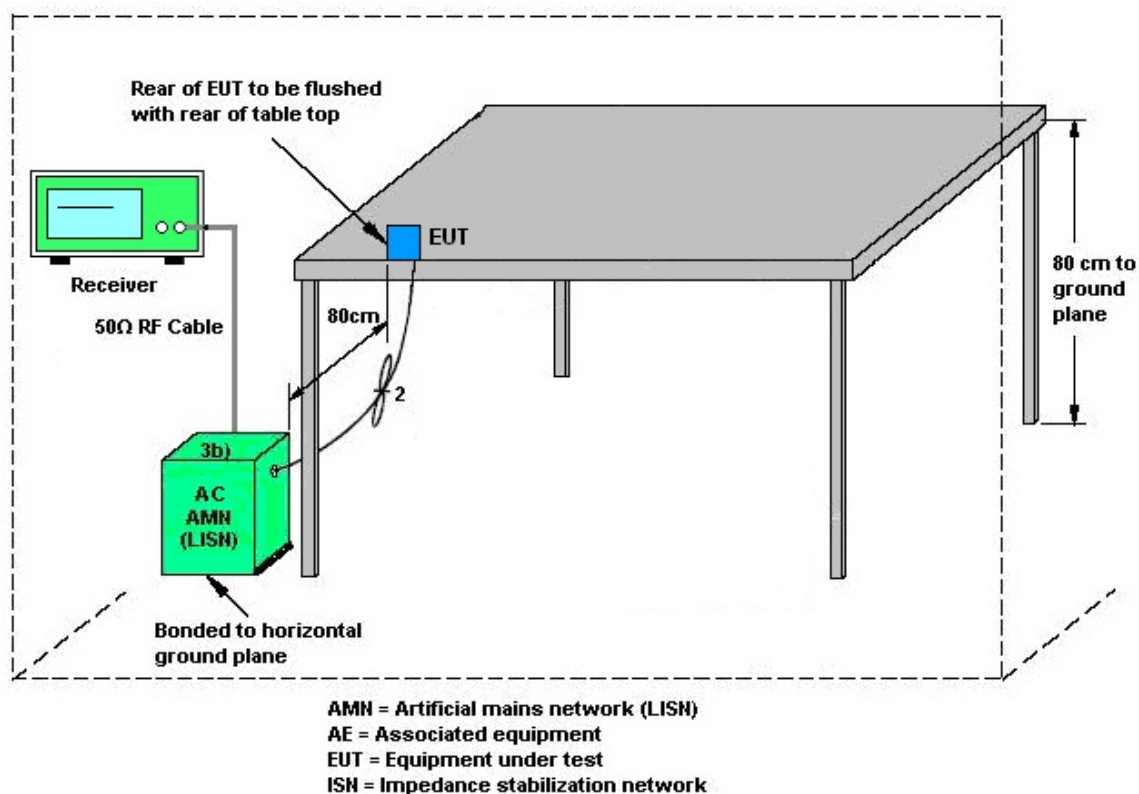

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	101108	9 kHz~30 MHz	Dec. 18, 2024	Oct. 23, 2025~ Nov. 22, 2025	Dec. 17, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Dec. 17, 2024	Oct. 23, 2025~ Nov. 22, 2025	Dec. 16, 2025	Radiation (03CH21-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 27, 2025	Oct. 23, 2025~ Nov. 22, 2025	Mar. 26, 2026	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	Oct. 23, 2025~ Nov. 22, 2025	Jul. 01, 2026	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 13, 2025	Oct. 23, 2025~ Nov. 22, 2025	Jul. 12, 2026	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 26, 2025	Oct. 23, 2025~ Nov. 22, 2025	Sep. 25, 2026	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Oct. 23, 2025~ Nov. 22, 2025	Aug. 25, 2026	Radiation (03CH21-HY)
EXA Signal Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 09, 2025	Oct. 23, 2025~ Nov. 22, 2025	Sep. 08, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Oct. 23, 2025~ Nov. 22, 2025	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/ 2,803954/2	30MHz~40GHz	Aug. 11, 2025	Oct. 23, 2025~ Nov. 22, 2025	Aug. 10, 2026	Radiation (03CH21-HY)
RF Cable	EMCI	EMC101Y-KM-KM-1000	240906	30MHz~40GHz	Oct. 21, 2025	Oct. 23, 2025~ Nov. 22, 2025	Oct. 20, 2026	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2025	Oct. 23, 2025~ Nov. 22, 2025	Oct. 20, 2026	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 23, 2025~ Nov. 22, 2025	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Oct. 23, 2025~ Nov. 22, 2025	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Oct. 23, 2025~ Nov. 22, 2025	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Oct. 23, 2025~ Nov. 22, 2025	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Nov. 27, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 27, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Nov. 27, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Nov. 27, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Nov. 27, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Nov. 27, 2025	Feb. 12, 2026	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101550	10Hz~13.6GHz	Jan. 13,2025	Nov. 26, 2025	Jan. 12,2026	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10003	0.5GHz-6GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10007	0.5GHz-6GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10011	0.5GHz-6GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10016	0.5GHz-6GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
Software 1	Sporton	DFS & Adaptivity Tools	N/A	Ver 1.0	NCR	Nov. 26, 2025	NCR	TPC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-01	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-09	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-01	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-03	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-05	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-10	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-11	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	150cm-#11	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	150cm-#15	30kHz~18GHz	Calibration from System	Nov. 26, 2025	Calibration from System	TPC (DF02-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
<CDD Mode>								
Hygrometer	TECPEL	DTM-303A	TP224371	N/A	Jun. 16, 2025	Oct. 14, 2025 ~ Dec. 04, 2025	Jun. 15, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W- 23010013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Oct. 14, 2025 ~ Dec. 04, 2025	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Oct. 14, 2025 ~ Dec. 04, 2025	Aug. 28, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Oct. 14, 2025 ~ Dec. 04, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Oct. 14, 2025 ~ Dec. 04, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Oct. 14, 2025 ~ Dec. 04, 2025	N/A	Conducted (TH05-HY)
<SDM Mode>								
Hygrometer	TECPEL	DTM-303A	TP224371	N/A	Jun. 16, 2025	Oct. 14, 2025 ~ Dec. 06, 2025	Jun. 15, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W- 23010013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Oct. 14, 2025 ~ Dec. 06, 2025	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Oct. 14, 2025 ~ Dec. 06, 2025	Aug. 28, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Oct. 16, 2025 ~ Dec. 06, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Oct. 14, 2025 ~ Dec. 06, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Oct. 14, 2025 ~ Dec. 06, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	21~25	°C
Test Date:	2025/10/14~2025/12/04	Relative Humidity:	51~54	%
Tool & Version	QRCT v4.1 Version 4.0.170.1			

<CDD Mode>

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6		
11a	6Mbps	2	001	5955	17.64	17.25	24.57	23.30	320.00	Pass
11a	6Mbps	2	049	6195	17.78	17.28	25.06	23.10	320.00	Pass
11a	6Mbps	2	093	6415	17.62	17.25	24.48	23.09	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	001	5955	-2.40	-2.80	0.41	3.17		3.58	14.00	Pass
11a	6Mbps	2	049	6195	-1.30	-2.40	1.20	3.17		4.37	14.00	Pass
11a	6Mbps	2	093	6415	-2.00	-2.80	0.63	3.17		3.80	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	001	5955	0.67	0.67			-11.08	5.69		-5.40	-5.00	Pass
11a	6Mbps	2	049	6195	0.67	0.67			-10.73	5.69		-5.04	-5.00	Pass
11a	6Mbps	2	093	6415	0.67	0.67			-10.86	5.69		-5.18	-5.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6		
11a	6Mbps	2	097	6435	17.61	17.21	24.82	23.18	320.00	Pass
11a	6Mbps	2	105	6475	17.63	17.25	25.09	23.23	320.00	Pass
11a	6Mbps	2	113	6515	17.63	17.19	24.82	23.08	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 7	Ant 6	SUM	Ant 7	Ant 6			
11a	6Mbps	2	097	6435	-2.40	-2.30	0.66	3.17		3.83	14.00	Pass
11a	6Mbps	2	105	6475	-1.80	-2.10	1.06	3.17		4.23	14.00	Pass
11a	6Mbps	2	113	6515	-2.50	-2.00	0.77	3.17		3.94	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	097	6435	0.67	0.67			-11.23	5.69		-5.54	-5.00	Pass
11a	6Mbps	2	105	6475	0.67	0.67			-10.92	5.69		-5.23	-5.00	Pass
11a	6Mbps	2	113	6515	0.67	0.67			-10.96	5.69		-5.27	-5.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6		
11a	6Mbps	2	117	6535	17.71	17.22	24.54	23.36	320.00	Pass
11a	6Mbps	2	149	6695	17.61	17.22	24.50	22.83	320.00	Pass
11a	6Mbps	2	181	6855	17.61	17.23	24.42	23.40	320.00	Pass

U-NII-7 straddle channel MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6		
11a	6Mbps	2	185	6875	17.62	17.21	24.51	23.26	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 7	Ant 6	SUM	Ant 7	Ant 6			
11a	6Mbps	2	117	6535	-1.60	-1.60	1.41	2.20		3.61	14.00	Pass
11a	6Mbps	2	149	6695	-0.80	-1.90	1.70	2.20		3.90	14.00	Pass
11a	6Mbps	2	181	6855	-1.00	-1.50	1.77	2.20		3.97	14.00	Pass

U-NII-7 straddle channel MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 7	Ant 6	SUM	Ant 7	Ant 6			
11a	6Mbps	2	185	6875	-0.40	-0.80	2.41	2.20		4.61	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	117	6535	0.67	0.67			-10.33	4.84		-5.48	-5.00	Pass
11a	6Mbps	2	149	6695	0.67	0.67			-10.11	4.84		-5.27	-5.00	Pass
11a	6Mbps	2	181	6855	0.67	0.67			-10.24	4.84		-5.40	-5.00	Pass

FCC U-NII-7 straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	185	6875	0.67	0.67			-9.94	4.84	-5.09	-5.00	Pass	

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 7	Ant 6	Ant 7	Ant 6		
11a	6Mbps	2	189	6895	17.62	17.23	24.44	23.40	320.00	Pass
11a	6Mbps	2	209	6995	17.66	17.22	24.81	23.47	320.00	Pass
11a	6Mbps	2	229	7095	17.57	17.21	24.09	23.22	320.00	Pass
11a	6Mbps	2	233	7115	17.58	17.20	24.50	23.33	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
11a	6Mbps	2	189	6895	-0.50	-0.80	2.36	2.20		4.56	14.00	Pass
11a	6Mbps	2	209	6995	-0.80	-0.70	2.26	2.20		4.46	14.00	Pass
11a	6Mbps	2	229	7095	-1.10	-0.20	2.38	2.20		4.58	14.00	Pass
11a	6Mbps	2	233	7115	-1.20	-0.40	2.23	2.20		4.43	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)		DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail	
					Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6			SUM
11a	6Mbps	2	189	6895	0.67	0.67			-9.91	4.58	-5.33	-5.00	Pass	
11a	6Mbps	2	209	6995	0.67	0.67			-10.06	4.58	-5.48	-5.00	Pass	
11a	6Mbps	2	229	7095	0.67	0.67			-10.16	4.58	-5.58	-5.00	Pass	
11a	6Mbps	2	233	7115	0.67	0.67			-10.02	4.58	-5.44	-5.00	Pass	

<SDM Mode>

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	001	5955	Full	2.20	1.70	4.97	3.17		8.14	14.00	Pass
HE20	MCS0	2	001	5955	26/0	-8.20	-8.30	-5.24	3.17		-2.07	14.00	Pass
HE20	MCS0	2	001	5955	52/37	-5.40	-5.40	-2.39	3.17		0.78	14.00	Pass
HE20	MCS0	2	001	5955	106/53	-2.40	-2.40	0.61	3.17		3.78	14.00	Pass
HE20	MCS0	2	049	6195	Full	1.90	1.50	4.71	3.17		7.88	14.00	Pass
HE20	MCS0	2	049	6195	26/4	-6.80	-7.50	-4.13	3.17		-0.96	14.00	Pass
HE20	MCS0	2	049	6195	52/38	-4.90	-6.10	-2.45	3.17		0.72	14.00	Pass
HE20	MCS0	2	049	6195	106/53	-2.10	-3.10	0.44	3.17		3.61	14.00	Pass
HE20	MCS0	2	093	6415	Full	2.20	1.40	4.83	3.17		8.00	14.00	Pass
HE20	MCS0	2	093	6415	26/8	-8.40	-8.80	-5.59	3.17		-2.42	14.00	Pass
HE20	MCS0	2	093	6415	52/40	-5.70	-5.90	-2.79	3.17		0.38	14.00	Pass
HE20	MCS0	2	093	6415	106/54	-2.50	-2.90	0.31	3.17		3.48	14.00	Pass
HE40	MCS0	2	003	5965	Full	4.80	4.80	7.81	3.17		10.98	14.00	Pass
HE40	MCS0	2	003	5965	242/61	0.40	-1.20	2.68	3.17		5.85	14.00	Pass
HE40	MCS0	2	051	6205	Full	4.50	4.20	7.36	3.17		10.53	14.00	Pass
HE40	MCS0	2	051	6205	242/61	0.00	-1.80	2.20	3.17		5.37	14.00	Pass
HE40	MCS0	2	091	6405	Full	5.40	4.80	8.12	3.17		11.29	14.00	Pass
HE40	MCS0	2	091	6405	242/62	0.40	-1.50	2.56	3.17		5.73	14.00	Pass
HE80	MCS0	2	007	5985	Full	7.60	7.50	10.56	3.17		13.73	14.00	Pass
HE80	MCS0	2	007	5985	484/65	4.90	4.90	7.91	3.17		11.08	14.00	Pass
HE80	MCS0	2	055	6225	Full	7.40	7.60	10.51	3.17		13.68	14.00	Pass
HE80	MCS0	2	055	6225	484/65	4.60	4.70	7.66	3.17		10.83	14.00	Pass
HE80	MCS0	2	087	6385	Full	7.80	7.60	10.71	3.17		13.88	14.00	Pass
HE80	MCS0	2	087	6385	484/66	4.70	3.60	7.20	3.17		10.37	14.00	Pass
HE160	MCS0	2	015	6025	Full	7.50	7.90	10.71	3.17		13.88	14.00	Pass
HE160	MCS0	2	015	6025	996/67	4.60	4.50	7.56	3.17		10.73	14.00	Pass
HE160	MCS0	2	047	6185	Full	7.40	7.60	10.51	3.17		13.68	14.00	Pass
HE160	MCS0	2	047	6185	996/67	4.20	4.50	7.36	3.17		10.53	14.00	Pass
HE160	MCS0	2	079	6345	Full	7.50	7.60	10.56	3.17		13.73	14.00	Pass
HE160	MCS0	2	079	6345	996/S67	4.70	3.90	7.33	3.17		10.50	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	001	5955	Full	0.67	0.66		-7.91	2.69		-5.22	-5.00	Pass	
HE20	MCS0	2	001	5955	26/0	0.63	0.65		-8.50	2.69		-5.81	-5.00	Pass	
HE20	MCS0	2	001	5955	52/37	0.64	0.64		-8.53	2.69		-5.84	-5.00	Pass	
HE20	MCS0	2	001	5955	106/53	0.66	0.66		-8.52	2.69		-5.83	-5.00	Pass	
HE20	MCS0	2	049	6195	Full	0.67	0.66		-8.17	2.69		-5.48	-5.00	Pass	
HE20	MCS0	2	049	6195	26/4	0.63	0.65		-8.73	2.69		-6.04	-5.00	Pass	
HE20	MCS0	2	049	6195	52/38	0.64	0.64		-8.90	2.69		-6.21	-5.00	Pass	
HE20	MCS0	2	049	6195	106/53	0.66	0.66		-8.80	2.69		-6.11	-5.00	Pass	
HE20	MCS0	2	093	6415	Full	0.67	0.66		-7.86	2.69		-5.17	-5.00	Pass	
HE20	MCS0	2	093	6415	26/8	0.63	0.65		-8.61	2.69		-5.92	-5.00	Pass	
HE20	MCS0	2	093	6415	52/40	0.64	0.64		-8.53	2.69		-5.84	-5.00	Pass	
HE20	MCS0	2	093	6415	106/54	0.66	0.66		-8.54	2.69		-5.85	-5.00	Pass	
HE40	MCS0	2	003	5965	Full	0.68	0.68		-8.20	2.69		-5.51	-5.00	Pass	
HE40	MCS0	2	003	5965	242/61	0.66	0.67		-10.03	2.69		-7.34	-5.00	Pass	
HE40	MCS0	2	051	6205	Full	0.68	0.68		-8.13	2.69		-5.44	-5.00	Pass	
HE40	MCS0	2	051	6205	242/61	0.66	0.67		-10.27	2.69		-7.58	-5.00	Pass	
HE40	MCS0	2	091	6405	Full	0.68	0.68		-7.88	2.69		-5.19	-5.00	Pass	
HE40	MCS0	2	091	6405	242/62	0.66	0.67		-9.68	2.69		-6.99	-5.00	Pass	
HE80	MCS0	2	007	5985	Full	0.69	0.69		-8.21	2.69		-5.52	-5.00	Pass	
HE80	MCS0	2	007	5985	484/65	0.68	0.68		-8.35	2.69		-5.66	-5.00	Pass	
HE80	MCS0	2	055	6225	Full	0.69	0.69	-8.41	2.69		-5.72	-5.00	Pass		
HE80	MCS0	2	055	6225	484/65	0.68	0.68	-8.54	2.69		-5.85	-5.00	Pass		
HE80	MCS0	2	087	6385	Full	0.69	0.69	-8.39	2.69		-5.70	-5.00	Pass		
HE80	MCS0	2	087	6385	484/66	0.68	0.68	-8.82	2.69		-6.13	-5.00	Pass		
HE160	MCS0	2	015	6025	Full	0.67	0.68	-10.97	2.69		-8.28	-5.00	Pass		
HE160	MCS0	2	015	6025	996/67	0.67	0.67	-11.34	2.69		-8.65	-5.00	Pass		
HE160	MCS0	2	047	6185	Full	0.67	0.68	-11.40	2.69		-8.71	-5.00	Pass		
HE160	MCS0	2	047	6185	996/67	0.67	0.67	-11.66	2.69		-8.97	-5.00	Pass		
HE160	MCS0	2	079	6345	Full	0.67	0.68	-10.68	2.69		-7.99	-5.00	Pass		
HE160	MCS0	2	079	6345	996/S67	0.67	0.67	-11.02	2.69		-8.33	-5.00	Pass		

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	097	6435	Full	1.90	1.40	4.67	3.17		7.84	14.00	Pass
HE20	MCS0	2	097	6435	26/0	-8.60	-8.80	-5.69	3.17		-2.52	14.00	Pass
HE20	MCS0	2	097	6435	52/37	-5.60	-5.80	-2.69	3.17		0.48	14.00	Pass
HE20	MCS0	2	097	6435	106/53	-2.60	-2.80	0.31	3.17		3.48	14.00	Pass
HE20	MCS0	2	105	6475	Full	2.30	1.70	5.02	3.17		8.19	14.00	Pass
HE20	MCS0	2	105	6475	26/4	-6.90	-7.50	-4.18	3.17		-1.01	14.00	Pass
HE20	MCS0	2	105	6475	52/38	-5.20	-5.90	-2.53	3.17		0.64	14.00	Pass
HE20	MCS0	2	105	6475	106/53	-2.50	-3.10	0.22	3.17		3.39	14.00	Pass
HE20	MCS0	2	113	6515	Full	2.10	2.10	5.11	3.17		8.28	14.00	Pass
HE20	MCS0	2	113	6515	26/8	-8.30	-8.30	-5.29	3.17		-2.12	14.00	Pass
HE20	MCS0	2	113	6515	52/40	-5.90	-5.80	-2.84	3.17		0.33	14.00	Pass
HE20	MCS0	2	113	6515	106/54	-2.80	-2.80	0.21	3.17		3.38	14.00	Pass
HE40	MCS0	2	099	6445	Full	4.90	4.50	7.71	3.17		10.88	14.00	Pass
HE40	MCS0	2	099	6445	242/61	0.10	-1.30	2.47	3.17		5.64	14.00	Pass
HE40	MCS0	2	107	6485	Full	5.20	4.60	7.92	3.17		11.09	14.00	Pass
HE40	MCS0	2	107	6485	242/62	1.70	1.30	4.51	3.17		7.68	14.00	Pass
HE80	MCS0	2	103	6465	Full	7.70	7.60	10.66	3.17		13.83	14.00	Pass
HE80	MCS0	2	103	6465	484/65	5.20	4.50	7.87	3.17		11.04	14.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE40	MCS0	2	115	6525	Full	5.30	4.60	7.97	3.17		11.14	14.00	Pass
HE40	MCS0	2	115	6525	242/62	0.20	-1.60	2.40	3.17		5.57	14.00	Pass
HE80	MCS0	2	119	6545	Full	7.70	7.70	10.71	3.17		13.88	14.00	Pass
HE80	MCS0	2	119	6545	484/65	5.20	4.00	7.65	3.17		10.82	14.00	Pass
HE160	MCS0	2	111	6505	Full	7.20	7.30	10.26	3.17		13.43	14.00	Pass
HE160	MCS0	2	111	6505	996/67	4.60	4.70	7.66	3.17		10.83	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	097	6435	Full	0.67	0.66			-8.18	2.69		-5.49	-5.00	Pass
HE20	MCS0	2	097	6435	26/0	0.63	0.65			-8.66	2.69		-5.97	-5.00	Pass
HE20	MCS0	2	097	6435	52/37	0.64	0.64			-8.46	2.69		-5.77	-5.00	Pass
HE20	MCS0	2	097	6435	106/53	0.66	0.66			-8.60	2.69		-5.91	-5.00	Pass
HE20	MCS0	2	105	6475	Full	0.67	0.66			-8.13	2.69		-5.44	-5.00	Pass
HE20	MCS0	2	105	6475	26/4	0.63	0.65			-8.32	2.69		-5.63	-5.00	Pass
HE20	MCS0	2	105	6475	52/38	0.64	0.64			-8.56	2.69		-5.87	-5.00	Pass
HE20	MCS0	2	105	6475	106/53	0.66	0.66			-8.55	2.69		-5.86	-5.00	Pass
HE20	MCS0	2	113	6515	Full	0.67	0.66			-8.16	2.69		-5.47	-5.00	Pass
HE20	MCS0	2	113	6515	26/8	0.63	0.65			-8.29	2.69		-5.60	-5.00	Pass
HE20	MCS0	2	113	6515	52/40	0.64	0.64			-8.38	2.69		-5.69	-5.00	Pass
HE20	MCS0	2	113	6515	106/54	0.66	0.66			-8.40	2.69		-5.71	-5.00	Pass
HE40	MCS0	2	099	6445	Full	0.68	0.68			-7.82	2.69		-5.13	-5.00	Pass
HE40	MCS0	2	099	6445	242/61	0.66	0.67			-9.75	2.69		-7.06	-5.00	Pass
HE40	MCS0	2	107	6485	Full	0.68	0.68			-7.76	2.69		-5.07	-5.00	Pass
HE40	MCS0	2	107	6485	242/62	0.66	0.67			-7.91	2.69		-5.22	-5.00	Pass
HE80	MCS0	2	103	6465	Full	0.69	0.69		-8.04	2.69		-5.35	-5.00	Pass	
HE80	MCS0	2	103	6465	484/65	0.68	0.68		-8.24	2.69		-5.55	-5.00	Pass	

U-NII-6 straddle channel MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE40	MCS0	2	115	6525	Full	0.68	0.68			-7.95	2.69		-5.26	-5.00	Pass
HE40	MCS0	2	115	6525	242/62	0.66	0.67			-9.71	2.69		-7.02	-5.00	Pass
HE80	MCS0	2	119	6545	Full	0.69	0.69			-8.39	2.69		-5.70	-5.00	Pass
HE80	MCS0	2	119	6545	484/66	0.68	0.68			-8.52	2.69		-5.83	-5.00	Pass
HE160	MCS0	2	111	6505	Full	0.67	0.68			-11.67	2.69		-8.98	-5.00	Pass
HE160	MCS0	2	111	6505	996/67	0.67	0.67			-11.68	2.69		-8.99	-5.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
HE20	MCS0	2	117	6535	Full	3.00	2.60	5.81	2.20	2.20	8.01	14.00	Pass
HE20	MCS0	2	117	6535	26/0	-6.70	-8.10	-4.33	2.20	2.20	-2.13	14.00	Pass
HE20	MCS0	2	117	6535	52/37	-3.80	-5.20	-1.43	2.20	2.20	0.77	14.00	Pass
HE20	MCS0	2	117	6535	106/53	-1.20	-2.60	1.17	2.20	2.20	3.37	14.00	Pass
HE20	MCS0	2	149	6695	Full	3.20	2.60	5.92	2.20	2.20	8.12	14.00	Pass
HE20	MCS0	2	149	6695	26/4	-5.20	-7.00	-3.00	2.20	2.20	-0.80	14.00	Pass
HE20	MCS0	2	149	6695	52/38	-3.20	-5.00	-1.00	2.20	2.20	1.20	14.00	Pass
HE20	MCS0	2	149	6695	106/53	-0.80	-1.60	1.83	2.20	2.20	4.03	14.00	Pass
HE20	MCS0	2	181	6855	Full	2.60	2.70	5.66	2.20	2.20	7.86	14.00	Pass
HE20	MCS0	2	181	6855	26/8	-7.20	-7.00	-4.09	2.20	2.20	-1.89	14.00	Pass
HE20	MCS0	2	181	6855	52/40	-3.60	-4.90	-1.19	2.20	2.20	1.01	14.00	Pass
HE20	MCS0	2	181	6855	106/54	-0.50	-1.70	1.95	2.20	2.20	4.15	14.00	Pass
HE40	MCS0	2	123	6565	Full	6.30	5.00	8.71	2.20	2.20	10.91	14.00	Pass
HE40	MCS0	2	123	6565	242/61	2.20	1.70	4.97	2.20	2.20	7.17	14.00	Pass
HE40	MCS0	2	147	6685	Full	6.20	5.70	8.97	2.20	2.20	11.17	14.00	Pass
HE40	MCS0	2	147	6685	242/61	2.70	2.20	5.47	2.20	2.20	7.67	14.00	Pass
HE40	MCS0	2	179	6845	Full	6.10	6.30	9.21	2.20	2.20	11.41	14.00	Pass
HE40	MCS0	2	179	6845	242/62	2.60	2.20	5.41	2.20	2.20	7.61	14.00	Pass
HE80	MCS0	2	135	6625	Full	8.40	8.40	11.41	2.20	2.20	13.61	14.00	Pass
HE80	MCS0	2	135	6625	484/65	5.30	4.10	7.75	2.20	2.20	9.95	14.00	Pass
HE80	MCS0	2	151	6705	Full	8.50	8.10	11.31	2.20	2.20	13.51	14.00	Pass
HE80	MCS0	2	151	6705	484/65	6.10	4.70	8.47	2.20	2.20	10.67	14.00	Pass
HE80	MCS0	2	167	6785	Full	8.90	8.30	11.62	2.20	2.20	13.82	14.00	Pass
HE80	MCS0	2	167	6785	484/66	6.30	5.50	8.93	2.20	2.20	11.13	14.00	Pass
HE160	MCS0	2	143	6665	Full	8.70	8.20	11.47	2.20	2.20	13.67	14.00	Pass
HE160	MCS0	2	143	6665	996/S67	6.70	5.80	9.28	2.20	2.20	11.48	14.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
HE20	MCS0	2	185	6875	Full	2.70	2.70	5.71	2.20	2.20	7.91	14.00	Pass
HE20	MCS0	2	185	6875	26/8	-6.60	-7.40	-3.97	2.20	2.20	-1.77	14.00	Pass
HE20	MCS0	2	185	6875	52/40	-3.50	-4.80	-1.09	2.20	2.20	1.11	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	117	6535	Full	0.67	0.66			-7.23	1.84	-5.39	-5.00	Pass	
HE20	MCS0	2	117	6535	26/0	0.63	0.65			-7.57	1.84	-5.73	-5.00	Pass	
HE20	MCS0	2	117	6535	52/37	0.64	0.64			-7.33	1.84	-5.49	-5.00	Pass	
HE20	MCS0	2	117	6535	106/53	0.66	0.66			-7.41	1.84	-5.57	-5.00	Pass	
HE20	MCS0	2	149	6695	Full	0.67	0.66			-7.17	1.84	-5.33	-5.00	Pass	
HE20	MCS0	2	149	6695	26/4	0.63	0.65			-7.47	1.84	-5.63	-5.00	Pass	
HE20	MCS0	2	149	6695	52/38	0.64	0.64			-7.46	1.84	-5.62	-5.00	Pass	
HE20	MCS0	2	149	6695	106/53	0.66	0.66			-7.25	1.84	-5.41	-5.00	Pass	
HE20	MCS0	2	181	6855	Full	0.67	0.66			-7.25	1.84	-5.41	-5.00	Pass	
HE20	MCS0	2	181	6855	26/8	0.63	0.65			-7.40	1.84	-5.56	-5.00	Pass	
HE20	MCS0	2	181	6855	52/40	0.64	0.64			-7.68	1.84	-5.84	-5.00	Pass	
HE20	MCS0	2	181	6855	106/54	0.66	0.66			-7.41	1.84	-5.57	-5.00	Pass	
HE40	MCS0	2	123	6565	Full	0.68	0.68			-7.21	1.84	-5.37	-5.00	Pass	
HE40	MCS0	2	123	6565	242/61	0.66	0.67			-7.43	1.84	-5.59	-5.00	Pass	
HE40	MCS0	2	147	6685	Full	0.68	0.68			-7.30	1.84	-5.46	-5.00	Pass	
HE40	MCS0	2	147	6685	242/61	0.66	0.67			-7.51	1.84	-5.67	-5.00	Pass	
HE40	MCS0	2	179	6845	Full	0.68	0.68			-7.11	1.84	-5.27	-5.00	Pass	
HE40	MCS0	2	179	6845	242/62	0.66	0.67			-7.20	1.84	-5.36	-5.00	Pass	
HE80	MCS0	2	135	6625	Full	0.69	0.69			-7.82	1.84	-5.98	-5.00	Pass	
HE80	MCS0	2	135	6625	484/65	0.68	0.68			-7.94	1.84	-6.10	-5.00	Pass	
HE80	MCS0	2	151	6705	Full	0.69	0.69		-7.55	1.84	-5.71	-5.00	Pass		
HE80	MCS0	2	151	6705	484/65	0.68	0.68		-7.61	1.84	-5.77	-5.00	Pass		
HE80	MCS0	2	167	6785	Full	0.69	0.69		-7.35	1.84	-5.51	-5.00	Pass		
HE80	MCS0	2	167	6785	484/66	0.68	0.68		-7.37	1.84	-5.53	-5.00	Pass		
HE160	MCS0	2	143	6665	Full	0.67	0.68		-9.97	1.84	-8.13	-5.00	Pass		
HE160	MCS0	2	143	6665	996/S67	0.67	0.67		-10.27	1.84	-8.43	-5.00	Pass		

U-NII-7 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	185	6875	Full	0.67	0.66			-7.45	1.84	-5.61	-5.00	Pass	
HE20	MCS0	2	185	6875	26/8	0.63	0.65			-7.69	1.84	-5.85	-5.00	Pass	

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	189	6895	Full	3.40	3.10	6.26	2.20		8.46	14.00	Pass
HE20	MCS0	2	189	6895	26/0	-6.30	-7.10	-3.67	2.20		-1.47	14.00	Pass
HE20	MCS0	2	189	6895	52/37	-3.40	-4.40	-0.86	2.20		1.34	14.00	Pass
HE20	MCS0	2	189	6895	106/53	-0.60	-1.50	1.98	2.20		4.18	14.00	Pass
HE20	MCS0	2	209	6995	Full	2.80	3.00	5.91	2.20		8.11	14.00	Pass
HE20	MCS0	2	209	6995	26/4	-5.50	-6.10	-2.78	2.20		-0.58	14.00	Pass
HE20	MCS0	2	209	6995	52/38	-3.90	-4.10	-0.99	2.20		1.21	14.00	Pass
HE20	MCS0	2	209	6995	106/53	-1.60	-1.20	1.61	2.20		3.81	14.00	Pass
HE20	MCS0	2	229	7095	Full	2.80	3.20	6.01	2.20		8.21	14.00	Pass
HE20	MCS0	2	229	7095	26/8	-7.00	-6.70	-3.84	2.20		-1.64	14.00	Pass
HE20	MCS0	2	229	7095	52/40	-4.40	-3.90	-1.13	2.20		1.07	14.00	Pass
HE20	MCS0	2	229	7095	106/54	-1.60	-1.30	1.56	2.20		3.76	14.00	Pass
HE20	MCS0	2	233	7115	Full	3.40	3.10	6.26	2.20		8.46	14.00	Pass
HE20	MCS0	2	233	7115	26/8	-6.00	-6.30	-3.14	2.20		-0.94	14.00	Pass
HE20	MCS0	2	233	7115	52/40	-3.10	-3.50	-0.29	2.20		1.91	14.00	Pass
HE20	MCS0	2	233	7115	106/54	0.20	-0.50	2.87	2.20		5.07	14.00	Pass
HE40	MCS0	2	195	6925	Full	6.40	6.60	9.51	2.20		11.71	14.00	Pass
HE40	MCS0	2	195	6925	242/61	2.60	2.60	5.61	2.20		7.81	14.00	Pass
HE40	MCS0	2	211	7005	Full	6.00	6.00	9.01	2.20		11.21	14.00	Pass
HE40	MCS0	2	211	7005	242/62	2.10	1.80	4.96	2.20		7.16	14.00	Pass
HE40	MCS0	2	227	7085	Full	6.30	6.40	9.36	2.20		11.56	14.00	Pass
HE40	MCS0	2	227	7085	242/62	2.50	2.70	5.61	2.20		7.81	14.00	Pass
HE80	MCS0	2	199	6945	Full	8.20	8.30	11.26	2.20		13.46	14.00	Pass
HE80	MCS0	2	199	6945	484/65	5.50	4.70	8.13	2.20		10.33	14.00	Pass
HE80	MCS0	2	215	7025	Full	8.30	8.20	11.26	2.20		13.46	14.00	Pass
HE80	MCS0	2	215	7025	484/66	5.10	5.20	8.16	2.20		10.36	14.00	Pass
HE160	MCS0	2	207	6985	Full	8.40	8.50	11.46	2.20		13.66	14.00	Pass
HE160	MCS0	2	207	6985	996/S67	6.60	6.50	9.56	2.20		11.76	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
HE20	MCS0	2	189	6895	Full	0.67	0.66		-7.26	1.59		-5.67	-5.00	Pass	
HE20	MCS0	2	189	6895	26/0	0.63	0.65		-7.43	1.59		-5.84	-5.00	Pass	
HE20	MCS0	2	189	6895	52/37	0.64	0.64		-7.44	1.59		-5.85	-5.00	Pass	
HE20	MCS0	2	189	6895	106/53	0.66	0.66		-7.34	1.59		-5.75	-5.00	Pass	
HE20	MCS0	2	209	6995	Full	0.67	0.66		-6.93	1.59		-5.34	-5.00	Pass	
HE20	MCS0	2	209	6995	26/4	0.63	0.65		-7.10	1.59		-5.51	-5.00	Pass	
HE20	MCS0	2	209	6995	52/38	0.64	0.64		-7.03	1.59		-5.44	-5.00	Pass	
HE20	MCS0	2	209	6995	106/53	0.66	0.66		-7.00	1.59		-5.41	-5.00	Pass	
HE20	MCS0	2	229	7095	Full	0.67	0.66		-7.06	1.59		-5.47	-5.00	Pass	
HE20	MCS0	2	229	7095	26/8	0.63	0.65		-7.45	1.59		-5.86	-5.00	Pass	
HE20	MCS0	2	229	7095	52/40	0.64	0.64		-7.41	1.59		-5.82	-5.00	Pass	
HE20	MCS0	2	229	7095	106/54	0.66	0.66		-7.39	1.59		-5.80	-5.00	Pass	
HE20	MCS0	2	233	7115	Full	0.67	0.66		-7.02	1.59		-5.43	-5.00	Pass	
HE20	MCS0	2	233	7115	26/8	0.63	0.65		-7.29	1.59		-5.70	-5.00	Pass	
HE20	MCS0	2	233	7115	52/40	0.64	0.64		-7.18	1.59		-5.59	-5.00	Pass	
HE20	MCS0	2	233	7115	106/54	0.66	0.66		-7.07	1.59		-5.48	-5.00	Pass	
HE40	MCS0	2	195	6925	Full	0.68	0.68		-7.01	1.59		-5.42	-5.00	Pass	
HE40	MCS0	2	195	6925	242/61	0.66	0.67		-7.15	1.59		-5.56	-5.00	Pass	
HE40	MCS0	2	211	7005	Full	0.68	0.68		-7.15	1.59		-5.56	-5.00	Pass	
HE40	MCS0	2	211	7005	242/62	0.66	0.67		-7.61	1.59		-6.02	-5.00	Pass	
HE40	MCS0	2	227	7085	Full	0.68	0.68	-7.02	1.59		-5.43	-5.00	Pass		
HE40	MCS0	2	227	7085	242/62	0.66	0.67	-7.19	1.59		-5.60	-5.00	Pass		
HE80	MCS0	2	199	6945	Full	0.69	0.69	-7.41	1.59		-5.82	-5.00	Pass		
HE80	MCS0	2	199	6945	484/65	0.68	0.68	-7.61	1.59		-6.02	-5.00	Pass		
HE80	MCS0	2	215	7025	Full	0.69	0.69	-7.07	1.59		-5.48	-5.00	Pass		
HE80	MCS0	2	215	7025	484/66	0.68	0.68	-7.12	1.59		-5.53	-5.00	Pass		
HE160	MCS0	2	207	6985	Full	0.67	0.68	-9.92	1.59		-8.33	-5.00	Pass		
HE160	MCS0	2	207	6985	996/S67	0.67	0.67	-9.97	1.59		-8.38	-5.00	Pass		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT20	MCS0	2	001	5955	Full	19.41	19.46	23.84	23.93	320.00	Pass
EHT20	MCS0	2	049	6195	Full	19.43	19.43	23.51	23.71	320.00	Pass
EHT20	MCS0	2	093	6415	Full	19.48	19.45	23.84	23.98	320.00	Pass
EHT40	MCS0	2	003	5965	Full	38.63	38.54	45.46	44.96	320.00	Pass
EHT40	MCS0	2	051	6205	Full	38.64	38.56	45.41	44.26	320.00	Pass
EHT40	MCS0	2	091	6405	Full	38.56	38.58	45.34	44.98	320.00	Pass
EHT80	MCS0	2	007	5985	Full	77.97	77.88	92.10	88.26	320.00	Pass
EHT80	MCS0	2	055	6225	Full	77.90	77.91	90.82	90.34	320.00	Pass
EHT80	MCS0	2	087	6385	Full	77.97	77.84	91.62	89.22	320.00	Pass
EHT160	MCS0	2	015	6025	Full	158.07	157.81	177.84	177.22	320.00	Pass
EHT160	MCS0	2	047	6185	Full	158.05	157.76	178.13	175.87	320.00	Pass
EHT160	MCS0	2	079	6345	Full	158.17	157.74	179.62	176.88	320.00	Pass
EHT320	MCS0	2	031	6105	Full	318.78	318.78	347.81	347.90	320.00	Pass
EHT320	MCS0	2	063	6265	Full	318.64	318.78	349.73	349.06	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
EHT20	MCS0	2	001	5955	Full	2.30	1.80	5.07	3.17		8.24	14.00	Pass
EHT20	MCS0	2	001	5955	26/0	-8.00	-8.10	-5.04	3.17		-1.87	14.00	Pass
EHT20	MCS0	2	001	5955	52/37	-5.10	-5.10	-2.09	3.17		1.08	14.00	Pass
EHT20	MCS0	2	001	5955	106/53	-2.10	-2.20	0.86	3.17		4.03	14.00	Pass
EHT20	MCS0	2	001	5955	52T+26T/70	-3.30	-3.50	-0.39	3.17		2.78	14.00	Pass
EHT20	MCS0	2	001	5955	106T+26T/82	-1.70	-1.80	1.26	3.17		4.43	14.00	Pass
EHT20	MCS0	2	049	6195	Full	2.00	1.60	4.81	3.17		7.98	14.00	Pass
EHT20	MCS0	2	049	6195	26/4	-6.50	-7.30	-3.87	3.17		-0.70	14.00	Pass
EHT20	MCS0	2	049	6195	52/38	-4.70	-5.80	-2.20	3.17		0.97	14.00	Pass
EHT20	MCS0	2	049	6195	106/53	-1.80	-2.70	0.78	3.17		3.95	14.00	Pass
EHT20	MCS0	2	093	6415	Full	2.30	1.50	4.93	3.17		8.10	14.00	Pass
EHT20	MCS0	2	093	6415	26/8	-8.20	-8.50	-5.34	3.17		-2.17	14.00	Pass
EHT20	MCS0	2	093	6415	52/40	-5.40	-5.70	-2.54	3.17		0.63	14.00	Pass
EHT20	MCS0	2	093	6415	106/54	-2.20	-2.60	0.61	3.17		3.78	14.00	Pass
EHT40	MCS0	2	003	5965	Full	4.90	4.90	7.91	3.17		11.08	14.00	Pass
EHT40	MCS0	2	003	5965	242/61	2.30	2.20	5.26	3.17		8.43	14.00	Pass
EHT40	MCS0	2	051	6205	Full	4.60	4.30	7.46	3.17		10.63	14.00	Pass
EHT40	MCS0	2	051	6205	242/61	1.80	1.30	4.57	3.17		7.74	14.00	Pass
EHT40	MCS0	2	091	6405	Full	5.50	4.90	8.22	3.17		11.39	14.00	Pass
EHT40	MCS0	2	091	6405	242/62	1.80	1.40	4.61	3.17		7.78	14.00	Pass
EHT80	MCS0	2	007	5985	Full	7.70	7.60	10.66	3.17		13.83	14.00	Pass
EHT80	MCS0	2	007	5985	484/65	5.20	5.10	8.16	3.17		11.33	14.00	Pass
EHT80	MCS0	2	007	5985	Puncture20/4	6.70	5.90	9.33	3.17		12.50	14.00	Pass
EHT80	MCS0	2	055	6225	Full	7.50	7.70	10.61	3.17		13.78	14.00	Pass
EHT80	MCS0	2	055	6225	484/65	4.80	4.90	7.86	3.17		11.03	14.00	Pass
EHT80	MCS0	2	055	6225	Puncture20/1	6.80	5.80	9.34	3.17		12.51	14.00	Pass
EHT80	MCS0	2	087	6385	Full	7.90	7.70	10.81	3.17		13.98	14.00	Pass
EHT80	MCS0	2	087	6385	484/66	5.20	4.10	7.70	3.17		10.87	14.00	Pass
EHT80	MCS0	2	087	6385	Puncture20/1	6.60	5.90	9.27	3.17		12.44	14.00	Pass
EHT160	MCS0	2	015	6025	Full	7.80	7.80	10.81	3.17		13.98	14.00	Pass
EHT160	MCS0	2	015	6025	996/67	4.70	4.60	7.66	3.17		10.83	14.00	Pass
EHT160	MCS0	2	015	6025	Puncture20/8	7.60	7.60	10.61	3.17		13.78	14.00	Pass
EHT160	MCS0	2	015	6025	Puncture40/4	6.90	6.00	9.48	3.17		12.65	14.00	Pass
EHT160	MCS0	2	047	6185	Full	7.50	7.70	10.61	3.17		13.78	14.00	Pass
EHT160	MCS0	2	047	6185	996/67	4.40	4.70	7.56	3.17		10.73	14.00	Pass
EHT160	MCS0	2	047	6185	Puncture20/8	6.90	7.00	9.96	3.17		13.13	14.00	Pass
EHT160	MCS0	2	047	6185	Puncture40/4	6.70	5.80	9.28	3.17		12.45	14.00	Pass
EHT160	MCS0	2	079	6345	Full	7.60	7.70	10.66	3.17		13.83	14.00	Pass
EHT160	MCS0	2	079	6345	996/S67	4.90	4.10	7.53	3.17		10.70	14.00	Pass
EHT160	MCS0	2	079	6345	Puncture20/1	7.50	7.20	10.36	3.17		13.53	14.00	Pass
EHT160	MCS0	2	079	6345	Puncture40/1	6.90	6.60	9.76	3.17		12.93	14.00	Pass
EHT320	MCS0	2	031	6105	Full	7.70	7.70	10.71	3.17		13.88	14.00	Pass
EHT320	MCS0	2	031	6105	2*996/69	5.90	5.80	8.86	3.17		12.03	14.00	Pass
EHT320	MCS0	2	031	6105	Puncture40/8	7.40	7.40	10.41	3.17		13.58	14.00	Pass
EHT320	MCS0	2	031	6105	Puncture80/4	7.20	6.60	9.92	3.17		13.09	14.00	Pass
EHT320	MCS0	2	031	6105	Puncture80+40/6	7.00	6.30	9.67	3.17		12.84	14.00	Pass
EHT320	MCS0	2	063	6265	Full	7.70	7.50	10.61	3.17		13.78	14.00	Pass
EHT320	MCS0	2	063	6265	2*996/69	5.50	5.40	8.46	3.17		11.63	14.00	Pass
EHT320	MCS0	2	063	6265	Puncture40/8	7.40	7.40	10.41	3.17		13.58	14.00	Pass
EHT320	MCS0	2	063	6265	Puncture80/4	7.00	6.50	9.77	3.17		12.94	14.00	Pass
EHT320	MCS0	2	063	6265	Puncture80+40/6	6.80	6.40	9.61	3.17		12.78	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	001	5955	Full	0.67	0.66			-7.89	2.69	-5.20	-5.00	Pass	
EHT20	MCS0	2	001	5955	26/0	0.66	0.66			-8.14	2.69	-5.45	-5.00	Pass	
EHT20	MCS0	2	001	5955	52/37	0.57	0.58			-8.07	2.69	-5.38	-5.00	Pass	
EHT20	MCS0	2	001	5955	106/53	0.66	0.67			-8.14	2.69	-5.45	-5.00	Pass	
EHT20	MCS0	2	001	5955	52T+26T/70	0.65	0.66			-8.11	2.69	-5.42	-5.00	Pass	
EHT20	MCS0	2	001	5955	106T+26T/82	0.67	0.66			-8.15	2.69	-5.46	-5.00	Pass	
EHT20	MCS0	2	049	6195	Full	0.67	0.66			-8.09	2.69	-5.40	-5.00	Pass	
EHT20	MCS0	2	049	6195	26/4	0.66	0.66			-8.14	2.69	-5.45	-5.00	Pass	
EHT20	MCS0	2	049	6195	52/38	0.57	0.58			-8.39	2.69	-5.70	-5.00	Pass	
EHT20	MCS0	2	049	6195	106/53	0.66	0.67			-8.29	2.69	-5.60	-5.00	Pass	
EHT20	MCS0	2	093	6415	Full	0.67	0.66			-7.81	2.69	-5.12	-5.00	Pass	
EHT20	MCS0	2	093	6415	26/8	0.66	0.66			-8.20	2.69	-5.51	-5.00	Pass	
EHT20	MCS0	2	093	6415	52/40	0.57	0.58			-8.30	2.69	-5.61	-5.00	Pass	
EHT20	MCS0	2	093	6415	106/54	0.66	0.67			-8.24	2.69	-5.55	-5.00	Pass	
EHT40	MCS0	2	003	5965	Full	0.67	0.67			-7.96	2.69	-5.27	-5.00	Pass	
EHT40	MCS0	2	003	5965	242/61	0.67	0.67			-8.05	2.69	-5.36	-5.00	Pass	
EHT40	MCS0	2	051	6205	Full	0.67	0.67			-8.09	2.69	-5.40	-5.00	Pass	
EHT40	MCS0	2	051	6205	242/61	0.67	0.67			-8.26	2.69	-5.57	-5.00	Pass	
EHT40	MCS0	2	091	6405	Full	0.67	0.67			-7.83	2.69	-5.14	-5.00	Pass	
EHT40	MCS0	2	091	6405	242/62	0.67	0.67			-8.00	2.69	-5.31	-5.00	Pass	
EHT80	MCS0	2	007	5985	Full	0.68	0.69			-8.05	2.69	-5.36	-5.00	Pass	
EHT80	MCS0	2	007	5985	484/65	0.68	0.68			-8.06	2.69	-5.37	-5.00	Pass	
EHT80	MCS0	2	007	5985	Puncture20/4	0.68	0.68			-8.36	2.69	-5.67	-5.00	Pass	
EHT80	MCS0	2	055	6225	Full	0.68	0.69			-8.06	2.69	-5.37	-5.00	Pass	
EHT80	MCS0	2	055	6225	484/65	0.68	0.68			-8.38	2.69	-5.69	-5.00	Pass	
EHT80	MCS0	2	055	6225	Puncture20/1	0.68	0.68			-8.36	2.69	-5.67	-5.00	Pass	
EHT80	MCS0	2	087	6385	Full	0.68	0.69			-8.08	2.69	-5.39	-5.00	Pass	
EHT80	MCS0	2	087	6385	484/66	0.68	0.68			-8.14	2.69	-5.45	-5.00	Pass	
EHT80	MCS0	2	087	6385	Puncture20/1	0.68	0.68			-8.28	2.69	-5.59	-5.00	Pass	
EHT160	MCS0	2	015	6025	Full	0.69	0.69			-10.85	2.69	-8.16	-5.00	Pass	
EHT160	MCS0	2	015	6025	996/67	0.67	0.67			-11.15	2.69	-8.46	-5.00	Pass	
EHT160	MCS0	2	015	6025	Puncture20/8	0.02	0.00			-11.02	2.69	-8.33	-5.00	Pass	
EHT160	MCS0	2	015	6025	Puncture40/4	0.68	0.68			-11.23	2.69	-8.54	-5.00	Pass	
EHT160	MCS0	2	047	6185	Full	0.69	0.69			-11.38	2.69	-8.69	-5.00	Pass	
EHT160	MCS0	2	047	6185	996/67	0.67	0.67			-11.62	2.69	-8.93	-5.00	Pass	
EHT160	MCS0	2	047	6185	Puncture20/8	0.02	0.00			-11.68	2.69	-8.99	-5.00	Pass	
EHT160	MCS0	2	047	6185	Puncture40/4	0.68	0.68			-11.53	2.69	-8.84	-5.00	Pass	
EHT160	MCS0	2	079	6345	Full	0.69	0.69			-10.54	2.69	-7.85	-5.00	Pass	
EHT160	MCS0	2	079	6345	996/S67	0.67	0.67			-10.57	2.69	-7.88	-5.00	Pass	
EHT160	MCS0	2	079	6345	Puncture20/1	0.02	0.00			-10.68	2.69	-7.99	-5.00	Pass	
EHT160	MCS0	2	079	6345	Puncture40/1	0.68	0.68		-11.03	2.69	-8.34	-5.00	Pass		
EHT320	MCS0	2	031	6105	Full	0.68	0.68		-13.49	2.69	-10.80	-5.00	Pass		
EHT320	MCS0	2	031	6105	2*996/69	0.67	0.67		-13.69	2.69	-11.00	-5.00	Pass		
EHT320	MCS0	2	031	6105	Puncture40/8	0.67	0.67		-13.88	2.69	-11.19	-5.00	Pass		
EHT320	MCS0	2	031	6105	Puncture80/4	0.67	0.67		-13.91	2.69	-11.22	-5.00	Pass		
EHT320	MCS0	2	031	6105	Puncture80+40/6	0.67	0.67		-13.56	2.69	-10.87	-5.00	Pass		
EHT320	MCS0	2	063	6265	Full	0.68	0.68		-13.71	2.69	-11.02	-5.00	Pass		
EHT320	MCS0	2	063	6265	2*996/69	0.67	0.67		-14.11	2.69	-11.42	-5.00	Pass		
EHT320	MCS0	2	063	6265	Puncture40/8	0.67	0.67		-14.00	2.69	-11.31	-5.00	Pass		
EHT320	MCS0	2	063	6265	Puncture80/4	0.67	0.67		-14.04	2.69	-11.35	-5.00	Pass		
EHT320	MCS0	2	063	6265	Puncture80+40/6	0.67	0.67		-13.73	2.69	-11.04	-5.00	Pass		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT20	MCS0	2	097	6435	Full	19.42	19.44	23.68	24.30	320.00	Pass
EHT20	MCS0	2	105	6475	Full	19.39	19.48	23.46	24.22	320.00	Pass
EHT20	MCS0	2	113	6515	Full	19.42	19.38	23.65	23.98	320.00	Pass
EHT40	MCS0	2	099	6445	Full	38.62	38.52	45.18	45.15	320.00	Pass
EHT40	MCS0	2	107	6485	Full	38.54	38.55	45.57	45.10	320.00	Pass
EHT80	MCS0	2	103	6465	Full	77.85	77.80	90.66	88.26	320.00	Pass

U-NII-6 straddle channel MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT40	MCS0	2	115	6525	Full	38.60	38.51	45.65	44.51	320.00	Pass
EHT80	MCS0	2	119	6545	Full	77.88	77.81	89.66	90.14	320.00	Pass
EHT160	MCS0	2	111	6505	Full	158.05	157.69	178.70	175.58	320.00	Pass
EHT320	MCS0	2	095	6425	Full	318.78	318.45	348.10	348.67	320.00	Pass
EHT320	MCS0	2	127	6585	Full	317.61	317.05	348.77	347.04	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	097	6435	Full	2.00	1.50	4.77	3.17		7.94	14.00	Pass
EHT20	MCS0	2	097	6435	26/0	-8.40	-8.70	-5.54	3.17		-2.37	14.00	Pass
EHT20	MCS0	2	097	6435	52/37	-5.50	-5.70	-2.59	3.17		0.58	14.00	Pass
EHT20	MCS0	2	097	6435	106/53	-2.40	-2.60	0.51	3.17		3.68	14.00	Pass
EHT20	MCS0	2	097	6435	52+26/70	-2.70	-3.60	-0.12	3.17		3.05	14.00	Pass
EHT20	MCS0	2	097	6435	106+26/82	-0.70	-1.50	1.93	3.17		5.10	14.00	Pass
EHT20	MCS0	2	105	6475	Full	2.40	1.80	5.12	3.17		8.29	14.00	Pass
EHT20	MCS0	2	105	6475	26/4	-6.60	-7.30	-3.93	3.17		-0.76	14.00	Pass
EHT20	MCS0	2	105	6475	52/38	-5.00	-5.70	-2.33	3.17		0.84	14.00	Pass
EHT20	MCS0	2	105	6475	106/53	-2.30	-2.90	0.42	3.17		3.59	14.00	Pass
EHT20	MCS0	2	113	6515	Full	2.20	2.20	5.21	3.17		8.38	14.00	Pass
EHT20	MCS0	2	113	6515	26/8	-8.10	-8.10	-5.09	3.17		-1.92	14.00	Pass
EHT20	MCS0	2	113	6515	52/40	-5.70	-5.50	-2.59	3.17		0.58	14.00	Pass
EHT20	MCS0	2	113	6515	106/54	-2.60	-2.50	0.46	3.17		3.63	14.00	Pass
EHT40	MCS0	2	099	6445	Full	5.00	4.60	7.81	3.17		10.98	14.00	Pass
EHT40	MCS0	2	099	6445	242/61	2.00	1.70	4.86	3.17		8.03	14.00	Pass
EHT40	MCS0	2	107	6485	Full	5.30	4.70	8.02	3.17		11.19	14.00	Pass
EHT40	MCS0	2	107	6485	242/62	1.90	1.40	4.67	3.17		7.84	14.00	Pass
EHT80	MCS0	2	103	6465	Full	7.80	7.70	10.76	3.17		13.93	14.00	Pass
EHT80	MCS0	2	103	6465	484/65	5.40	4.80	8.12	3.17		11.29	14.00	Pass
EHT80	MCS0	2	103	6465	Puncture20/4	6.50	5.90	9.22	3.17		12.39	14.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass. /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT40	MCS0	2	115	6525	Full	5.40	4.70	8.07	3.17		11.24	14.00	Pass
EHT40	MCS0	2	115	6525	242/62	2.30	1.80	5.07	3.17		8.24	14.00	Pass
EHT80	MCS0	2	119	6545	Full	7.80	7.80	10.81	3.17		13.98	14.00	Pass
EHT80	MCS0	2	119	6545	484/66	5.50	4.30	7.95	3.17		11.12	14.00	Pass
EHT80	MCS0	2	119	6545	Puncture20/1	6.40	6.10	9.26	3.17		12.43	14.00	Pass
EHT160	MCS0	2	111	6505	Full	7.30	7.40	10.36	3.17		13.53	14.00	Pass
EHT160	MCS0	2	111	6505	996/67	4.80	4.90	7.86	3.17		11.03	14.00	Pass
EHT160	MCS0	2	111	6505	Puncture20/8	7.20	7.30	10.26	3.17		13.43	14.00	Pass
EHT160	MCS0	2	111	6505	Puncture40/4	6.50	6.50	9.51	3.17		12.68	14.00	Pass
EHT320	MCS0	2	095	6425	Full	7.80	7.30	10.57	3.17		13.74	14.00	Pass
EHT320	MCS0	2	095	6425	2*996/70	3.90	3.70	6.81	3.17		9.98	14.00	Pass
EHT320	MCS0	2	095	6425	Puncture40/8	7.60	7.20	10.41	3.17		13.58	14.00	Pass
EHT320	MCS0	2	095	6425	Puncture80/4	7.20	6.40	9.83	3.17		13.00	14.00	Pass
EHT320	MCS0	2	095	6425	Puncture80+40/6	7.00	6.30	9.67	3.17		12.84	14.00	Pass
EHT320	MCS0	2	127	6585	Full	7.80	7.40	10.61	3.17		13.78	14.00	Pass
EHT320	MCS0	2	127	6585	2*996/69	6.30	5.60	8.97	3.17		12.14	14.00	Pass
EHT320	MCS0	2	127	6585	Puncture40/8	7.20	7.20	10.21	3.17		13.38	14.00	Pass
EHT320	MCS0	2	127	6585	Puncture80/4	6.90	7.00	9.96	3.17		13.13	14.00	Pass
EHT320	MCS0	2	127	6585	Puncture80+40/6	6.70	6.00	9.37	3.17		12.54	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	097	6435	Full	0.67	0.66			-8.10	2.69		-5.41	-5.00	Pass
EHT20	MCS0	2	097	6435	26/0	0.66	0.66			-8.53	2.69		-5.84	-5.00	Pass
EHT20	MCS0	2	097	6435	52/37	0.57	0.58			-8.49	2.69		-5.80	-5.00	Pass
EHT20	MCS0	2	097	6435	106/53	0.66	0.67			-8.48	2.69		-5.79	-5.00	Pass
EHT20	MCS0	2	097	6435	52+26/70	0.65	0.66			-8.49	2.69		-5.80	-5.00	Pass
EHT20	MCS0	2	097	6435	106+26/82	0.67	0.66			-8.37	2.69		-5.68	-5.00	Pass
EHT20	MCS0	2	105	6475	Full	0.67	0.66			-7.97	2.69		-5.28	-5.00	Pass
EHT20	MCS0	2	105	6475	26/4	0.66	0.66			-8.03	2.69		-5.34	-5.00	Pass
EHT20	MCS0	2	105	6475	52/38	0.57	0.58			-8.31	2.69		-5.62	-5.00	Pass
EHT20	MCS0	2	105	6475	106/53	0.66	0.67			-8.46	2.69		-5.77	-5.00	Pass
EHT20	MCS0	2	113	6515	Full	0.67	0.66			-7.83	2.69		-5.14	-5.00	Pass
EHT20	MCS0	2	113	6515	26/8	0.66	0.66			-7.85	2.69		-5.16	-5.00	Pass
EHT20	MCS0	2	113	6515	52/40	0.57	0.58			-8.20	2.69		-5.51	-5.00	Pass
EHT20	MCS0	2	113	6515	106/54	0.66	0.67			-8.27	2.69		-5.58	-5.00	Pass
EHT40	MCS0	2	099	6445	Full	0.67	0.67			-7.74	2.69		-5.05	-5.00	Pass
EHT40	MCS0	2	099	6445	242/61	0.67	0.67			-7.77	2.69		-5.08	-5.00	Pass
EHT40	MCS0	2	107	6485	Full	0.67	0.67			-7.75	2.69		-5.06	-5.00	Pass
EHT40	MCS0	2	107	6485	242/62	0.67	0.67			-8.05	2.69		-5.36	-5.00	Pass
EHT80	MCS0	2	103	6465	Full	0.68	0.69			-7.93	2.69		-5.24	-5.00	Pass
EHT80	MCS0	2	103	6465	484/65	0.68	0.68			-7.98	2.69		-5.29	-5.00	Pass
EHT80	MCS0	2	103	6465	Puncture20/4	0.68	0.68		-8.23	2.69		-5.54	-5.00	Pass	

U-NII-6 straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass./Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT40	MCS0	2	115	6525	Full	0.67	0.67			-7.81	2.69	-5.12	-5.00	Pass	
EHT40	MCS0	2	115	6525	242/62	0.67	0.67			-7.83	2.69	-5.14	-5.00	Pass	
EHT80	MCS0	2	119	6545	Full	0.68	0.69			-7.95	2.69	-5.26	-5.00	Pass	
EHT80	MCS0	2	119	6545	484/66	0.68	0.68			-7.98	2.69	-5.29	-5.00	Pass	
EHT80	MCS0	2	119	6545	Puncture20/1	0.68	0.68			-8.17	2.69	-5.48	-5.00	Pass	
EHT160	MCS0	2	111	6505	Full	0.69	0.69			-11.29	2.69	-8.60	-5.00	Pass	
EHT160	MCS0	2	111	6505	996/67	0.67	0.67			-11.56	2.69	-8.87	-5.00	Pass	
EHT160	MCS0	2	111	6505	Puncture20/8	0.02	0.00			-11.30	2.69	-8.61	-5.00	Pass	
EHT160	MCS0	2	111	6505	Puncture40/4	0.68	0.68			-11.61	2.69	-8.92	-5.00	Pass	
EHT320	MCS0	2	095	6425	Full	0.68	0.68			-14.11	2.69	-11.42	-5.00	Pass	
EHT320	MCS0	2	095	6425	2*996/70	0.67	0.67			-14.38	2.69	-11.69	-5.00	Pass	
EHT320	MCS0	2	095	6425	Puncture40/8	0.68	0.68			-14.24	2.69	-11.55	-5.00	Pass	
EHT320	MCS0	2	095	6425	Puncture80/4	0.67	0.67			-14.50	2.69	-11.81	-5.00	Pass	
EHT320	MCS0	2	095	6425	Puncture80+40/6	0.66	0.67			-14.25	2.69	-11.56	-5.00	Pass	
EHT320	MCS0	2	127	6585	Full	0.68	0.68			-13.57	2.69	-10.88	-5.00	Pass	
EHT320	MCS0	2	127	6585	2*996/69	0.67	0.67			-13.66	2.69	-10.97	-5.00	Pass	
EHT320	MCS0	2	127	6585	Puncture40/8	0.67	0.67		-13.75	2.69	-11.06	-5.00	Pass		
EHT320	MCS0	2	127	6585	Puncture80/4	0.67	0.67		-13.63	2.69	-10.94	-5.00	Pass		
EHT320	MCS0	2	127	6585	Puncture80+40/6	0.67	0.67		-13.61	2.69	-10.92	-5.00	Pass		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT20	MCS0	2	117	6535	Full	19.41	19.38	23.98	23.79	320.00	Pass
EHT20	MCS0	2	149	6695	Full	19.40	19.44	23.51	23.74	320.00	Pass
EHT20	MCS0	2	181	6855	Full	19.49	19.46	23.37	23.69	320.00	Pass
EHT40	MCS0	2	123	6565	Full	38.61	38.49	45.28	44.78	320.00	Pass
EHT40	MCS0	2	147	6685	Full	38.56	38.41	45.10	44.56	320.00	Pass
EHT40	MCS0	2	179	6845	Full	38.69	38.53	45.33	44.94	320.00	Pass
EHT80	MCS0	2	135	6625	Full	77.98	77.86	91.33	90.21	320.00	Pass
EHT80	MCS0	2	151	6705	Full	77.90	77.82	90.24	89.06	320.00	Pass
EHT80	MCS0	2	167	6785	Full	77.92	77.82	90.02	89.73	320.00	Pass
EHT16Q	MCS0	2	143	6665	Full	158.17	157.81	179.62	175.30	320.00	Pass

U-NII-7 straddle channel MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT20	MCS0	2	185	6875	Full	19.48	19.46	23.64	23.71	320.00	Pass
EHT40	MCS0	2	187	6885	Full	38.72	38.55	45.04	45.07	320.00	Pass
EHT80	MCS0	2	183	6865	Full	77.79	77.68	90.34	89.63	320.00	Pass
EHT16Q	MCS0	2	175	6825	Full	157.82	157.39	178.22	176.06	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
EHT20	MCS0	2	117	6535	Full	3.10	2.70	5.91	2.20		8.11	14.00	Pass
EHT20	MCS0	2	117	6535	26/0	-6.50	-7.90	-4.13	2.20		-1.93	14.00	Pass
EHT20	MCS0	2	117	6535	52/37	-3.60	-5.00	-1.23	2.20		0.97	14.00	Pass
EHT20	MCS0	2	117	6535	106/53	-1.00	-2.40	1.37	2.20		3.57	14.00	Pass
EHT20	MCS0	2	117	6535	52+26/70	-1.50	-2.30	1.13	2.20		3.33	14.00	Pass
EHT20	MCS0	2	117	6535	106+26/82	0.50	-0.10	3.22	2.20		5.42	14.00	Pass
EHT20	MCS0	2	149	6695	Full	3.30	2.70	6.02	2.20		8.22	14.00	Pass
EHT20	MCS0	2	149	6695	26/4	-5.00	-6.90	-2.84	2.20		-0.64	14.00	Pass
EHT20	MCS0	2	149	6695	52/38	-3.00	-4.70	-0.76	2.20		1.44	14.00	Pass
EHT20	MCS0	2	149	6695	106/53	-0.60	-1.50	1.98	2.20		4.18	14.00	Pass
EHT20	MCS0	2	181	6855	Full	2.70	2.80	5.76	2.20		7.96	14.00	Pass
EHT20	MCS0	2	181	6855	26/8	-6.90	-6.70	-3.79	2.20		-1.59	14.00	Pass
EHT20	MCS0	2	181	6855	52/40	-3.40	-4.70	-0.99	2.20		1.21	14.00	Pass
EHT20	MCS0	2	181	6855	106/54	-0.40	-1.50	2.10	2.20		4.30	14.00	Pass
EHT40	MCS0	2	123	6565	Full	6.40	5.10	8.81	2.20		11.01	14.00	Pass
EHT40	MCS0	2	123	6565	242/61	3.00	2.20	5.63	2.20		7.83	14.00	Pass
EHT40	MCS0	2	147	6685	Full	6.30	5.80	9.07	2.20		11.27	14.00	Pass
EHT40	MCS0	2	147	6685	242/61	3.00	2.30	5.67	2.20		7.87	14.00	Pass
EHT40	MCS0	2	179	6845	Full	6.20	6.40	9.31	2.20		11.51	14.00	Pass
EHT40	MCS0	2	179	6845	242/62	2.80	2.50	5.66	2.20		7.86	14.00	Pass
EHT80	MCS0	2	135	6625	Full	8.50	8.50	11.51	2.20		13.71	14.00	Pass
EHT80	MCS0	2	135	6625	484/65	5.60	4.30	8.01	2.20		10.21	14.00	Pass
EHT80	MCS0	2	135	6625	Puncture20/4	6.30	6.00	9.16	2.20		11.36	14.00	Pass
EHT80	MCS0	2	151	6705	Full	9.00	8.20	11.63	2.20		13.83	14.00	Pass
EHT80	MCS0	2	151	6705	484/65	6.30	4.90	8.67	2.20		10.87	14.00	Pass
EHT80	MCS0	2	151	6705	Puncture20/1	7.60	6.60	10.14	2.20		12.34	14.00	Pass
EHT80	MCS0	2	167	6785	Full	9.00	8.40	11.72	2.20		13.92	14.00	Pass
EHT80	MCS0	2	167	6785	484/66	6.40	5.70	9.07	2.20		11.27	14.00	Pass
EHT80	MCS0	2	167	6785	Puncture20/1	7.70	7.10	10.42	2.20		12.62	14.00	Pass
EHT160	MCS0	2	143	6665	Full	8.80	8.30	11.57	2.20		13.77	14.00	Pass
EHT160	MCS0	2	143	6665	996/S67	7.00	6.00	9.54	2.20		11.74	14.00	Pass
EHT160	MCS0	2	143	6665	Puncture20/8	8.70	8.20	11.47	2.20		13.67	14.00	Pass
EHT160	MCS0	2	143	6665	Puncture40/4	8.50	7.80	11.17	2.20		13.37	14.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
EHT20	MCS0	2	185	6875	Full	2.80	2.80	5.81	2.20		8.01	14.00	Pass
EHT20	MCS0	2	185	6875	26/8	-6.40	-7.20	-3.77	2.20		-1.57	14.00	Pass
EHT20	MCS0	2	185	6875	52/40	-3.30	-4.60	-0.89	2.20		1.31	14.00	Pass
EHT20	MCS0	2	185	6875	106/54	-0.30	-1.60	2.11	2.20		4.31	14.00	Pass
EHT40	MCS0	2	187	6885	Full	6.40	6.30	9.36	2.20		11.56	14.00	Pass
EHT40	MCS0	2	187	6885	242/62	2.70	3.00	5.86	2.20		8.06	14.00	Pass
EHT80	MCS0	2	183	6865	Full	8.70	8.70	11.71	2.20		13.91	14.00	Pass
EHT80	MCS0	2	183	6865	484/66	5.90	5.00	8.48	2.20		10.68	14.00	Pass
EHT80	MCS0	2	183	6865	Puncture20/1	7.50	7.40	10.46	2.20		12.66	14.00	Pass
EHT160	MCS0	2	175	6825	Full	8.50	8.40	11.46	2.20		13.66	14.00	Pass
EHT160	MCS0	2	175	6825	996/67	6.70	6.60	9.66	2.20		11.86	14.00	Pass
EHT160	MCS0	2	175	6825	Puncture20/8	8.40	8.30	11.36	2.20		13.56	14.00	Pass
EHT160	MCS0	2	175	6825	Puncture40/4	8.10	7.90	11.01	2.20		13.21	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	117	6535	Full	0.67	0.66			-6.96	1.84		-5.12	-5.00	Pass
EHT20	MCS0	2	117	6535	26/0	0.66	0.66			-7.02	1.84		-5.18	-5.00	Pass
EHT20	MCS0	2	117	6535	52/37	0.57	0.58			-7.03	1.84		-5.19	-5.00	Pass
EHT20	MCS0	2	117	6535	106/53	0.66	0.67			-7.45	1.84		-5.61	-5.00	Pass
EHT20	MCS0	2	117	6535	52+26/70	0.65	0.66			-7.08	1.84		-5.24	-5.00	Pass
EHT20	MCS0	2	117	6535	106+26/82	0.67	0.66			-7.44	1.84		-5.60	-5.00	Pass
EHT20	MCS0	2	149	6695	Full	0.67	0.66			-6.95	1.84		-5.11	-5.00	Pass
EHT20	MCS0	2	149	6695	26/4	0.66	0.66			-7.18	1.84		-5.34	-5.00	Pass
EHT20	MCS0	2	149	6695	52/38	0.57	0.58			-6.98	1.84		-5.14	-5.00	Pass
EHT20	MCS0	2	149	6695	106/53	0.66	0.67			-7.34	1.84		-5.50	-5.00	Pass
EHT20	MCS0	2	181	6855	Full	0.67	0.66			-7.18	1.84		-5.34	-5.00	Pass
EHT20	MCS0	2	181	6855	26/8	0.66	0.66			-7.36	1.84		-5.52	-5.00	Pass
EHT20	MCS0	2	181	6855	52/40	0.57	0.58			-7.26	1.84		-5.42	-5.00	Pass
EHT20	MCS0	2	181	6855	106/54	0.66	0.67			-7.24	1.84		-5.40	-5.00	Pass
EHT40	MCS0	2	123	6565	Full	0.67	0.67			-6.95	1.84		-5.11	-5.00	Pass
EHT40	MCS0	2	123	6565	242/61	0.67	0.67			-6.96	1.84		-5.12	-5.00	Pass
EHT40	MCS0	2	147	6685	Full	0.67	0.67			-6.88	1.84		-5.04	-5.00	Pass
EHT40	MCS0	2	147	6685	242/61	0.67	0.67			-6.97	1.84		-5.13	-5.00	Pass
EHT40	MCS0	2	179	6845	Full	0.67	0.67			-6.93	1.84		-5.09	-5.00	Pass
EHT40	MCS0	2	179	6845	242/62	0.67	0.67			-7.24	1.84		-5.40	-5.00	Pass
EHT80	MCS0	2	135	6625	Full	0.68	0.69		-7.61	1.84		-5.77	-5.00	Pass	
EHT80	MCS0	2	135	6625	484/65	0.68	0.68		-8.09	1.84		-6.25	-5.00	Pass	
EHT80	MCS0	2	135	6625	Puncture20/4	0.68	0.68		-8.17	1.84		-6.33	-5.00	Pass	
EHT80	MCS0	2	151	6705	Full	0.68	0.69		-7.31	1.84		-5.47	-5.00	Pass	
EHT80	MCS0	2	151	6705	484/65	0.68	0.68		-7.66	1.84		-5.82	-5.00	Pass	
EHT80	MCS0	2	151	6705	Puncture20/1	0.68	0.68		-7.40	1.84		-5.56	-5.00	Pass	
EHT80	MCS0	2	167	6785	Full	0.68	0.69		-6.96	1.84		-5.12	-5.00	Pass	
EHT80	MCS0	2	167	6785	484/66	0.68	0.68		-6.98	1.84		-5.14	-5.00	Pass	
EHT80	MCS0	2	167	6785	Puncture20/1	0.68	0.68		-7.12	1.84		-5.28	-5.00	Pass	
EHT160	MCS0	2	143	6665	Full	0.69	0.69		-9.79	1.84		-7.95	-5.00	Pass	
EHT160	MCS0	2	143	6665	996/S67	0.67	0.67		-10.00	1.84		-8.16	-5.00	Pass	
EHT160	MCS0	2	143	6665	Puncture20/8	0.02	0.00		-9.86	1.84		-8.02	-5.00	Pass	
EHT160	MCS0	2	143	6665	Puncture40/4	0.68	0.68		-9.82	1.84		-7.98	-5.00	Pass	

U-NII-7 straddle channel MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	185	6875	Full	0.67	0.66			-7.29	1.84	-5.45	-5.00	Pass	
EHT20	MCS0	2	185	6875	26/8	0.66	0.66			-7.43	1.84	-5.59	-5.00	Pass	
EHT20	MCS0	2	185	6875	52/40	0.57	0.58			-7.37	1.84	-5.53	-5.00	Pass	
EHT20	MCS0	2	185	6875	106/54	0.66	0.67			-7.39	1.84	-5.55	-5.00	Pass	
EHT40	MCS0	2	187	6885	Full	0.67	0.67			-7.00	1.84	-5.16	-5.00	Pass	
EHT40	MCS0	2	187	6885	242/62	0.67	0.67			-7.37	1.84	-5.53	-5.00	Pass	
EHT80	MCS0	2	183	6865	Full	0.68	0.69			-7.16	1.84	-5.32	-5.00	Pass	
EHT80	MCS0	2	183	6865	484/66	0.68	0.68			-7.49	1.84	-5.65	-5.00	Pass	
EHT80	MCS0	2	183	6865	Puncture20/1	0.68	0.68			-7.39	1.84	-5.55	-5.00	Pass	
EHT160	MCS0	2	175	6825	Full	0.69	0.69			-9.53	1.84	-7.69	-5.00	Pass	
EHT160	MCS0	2	175	6825	996/67	0.67	0.67			-9.80	1.84	-7.96	-5.00	Pass	
EHT160	MCS0	2	175	6825	Puncture20/8	0.02	0.00			-9.69	1.84	-7.85	-5.00	Pass	
EHT160	MCS0	2	175	6825	Puncture40/4	0.68	0.68	-9.63	1.84	-7.79	-5.00	Pass			

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT20	MCS0	2	189	6895	Full	19.46	19.44	23.62	23.70	320.00	Pass
EHT20	MCS0	2	209	6995	Full	19.24	19.24	23.54	23.62	320.00	Pass
EHT20	MCS0	2	229	7095	Full	19.28	19.25	23.50	23.68	320.00	Pass
EHT20	MCS0	2	233	7115	Full	19.28	19.27	23.73	24.23	320.00	Pass
EHT40	MCS0	2	195	6925	Full	38.40	38.24	45.33	44.59	320.00	Pass
EHT40	MCS0	2	211	7005	Full	38.38	38.26	45.63	45.34	320.00	Pass
EHT40	MCS0	2	227	7085	Full	38.35	38.26	45.36	45.25	320.00	Pass
EHT80	MCS0	2	199	6945	Full	77.77	77.68	90.27	89.41	320.00	Pass
EHT80	MCS0	2	215	7025	Full	77.77	77.67	92.51	89.98	320.00	Pass
EHT160	MCS0	2	207	6985	Full	157.90	157.47	178.90	176.59	320.00	Pass

U-NII-8 straddle channel MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6		
EHT320	MCS0	2	159	6745	Full	317.31	317.21	350.78	344.45	320.00	Pass
EHT320	MCS0	2	191	6905	Full	317.41	317.09	349.06	346.27	320.00	Pass

Note: According to KDB987594 D03, the bandwidth limit of 320M is used 99%OB

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
EHT20	MCS0	2	189	6895	Full	3.50	3.20	6.36	2.20		8.56	14.00	Pass
EHT20	MCS0	2	189	6895	26/0	-6.10	-6.90	-3.47	2.20		-1.27	14.00	Pass
EHT20	MCS0	2	189	6895	52/37	-3.20	-4.20	-0.66	2.20		1.54	14.00	Pass
EHT20	MCS0	2	189	6895	106/53	-0.40	-1.30	2.18	2.20		4.38	14.00	Pass
EHT20	MCS0	2	209	6995	Full	2.90	3.10	6.01	2.20		8.21	14.00	Pass
EHT20	MCS0	2	209	6995	26/4	-5.30	-5.80	-2.53	2.20		-0.33	14.00	Pass
EHT20	MCS0	2	209	6995	52/38	-3.60	-3.90	-0.74	2.20		1.46	14.00	Pass
EHT20	MCS0	2	209	6995	106/53	-0.30	-0.70	2.51	2.20		4.71	14.00	Pass
EHT20	MCS0	2	229	7095	Full	3.00	3.40	6.21	2.20		8.41	14.00	Pass
EHT20	MCS0	2	229	7095	26/8	-6.80	-6.50	-3.64	2.20		-1.44	14.00	Pass
EHT20	MCS0	2	229	7095	52/40	-4.20	-3.70	-0.93	2.20		1.27	14.00	Pass
EHT20	MCS0	2	229	7095	106/54	-1.40	-1.10	1.76	2.20		3.96	14.00	Pass
EHT20	MCS0	2	229	7095	52+26/72	-2.20	-2.00	0.91	2.20		3.11	14.00	Pass
EHT20	MCS0	2	229	7095	106+26/83	-0.50	0.10	2.82	2.20		5.02	14.00	Pass
EHT20	MCS0	2	233	7115	Full	3.50	3.20	6.36	2.20		8.56	14.00	Pass
EHT20	MCS0	2	233	7115	26/8	-5.80	-6.10	-2.94	2.20		-0.74	14.00	Pass
EHT20	MCS0	2	233	7115	52/40	-2.90	-3.30	-0.09	2.20		2.11	14.00	Pass
EHT20	MCS0	2	233	7115	106/54	0.10	-0.30	2.91	2.20		5.11	14.00	Pass
EHT20	MCS0	2	233	7115	52+26/72	-1.10	-1.30	1.81	2.20		4.01	14.00	Pass
EHT20	MCS0	2	233	7115	106+26/83	0.40	0.60	3.51	2.20		5.71	14.00	Pass
EHT40	MCS0	2	195	6925	Full	6.50	6.70	9.61	2.20		11.81	14.00	Pass
EHT40	MCS0	2	195	6925	242/61	2.80	2.90	5.86	2.20		8.06	14.00	Pass
EHT40	MCS0	2	211	7005	Full	6.10	6.10	9.11	2.20		11.31	14.00	Pass
EHT40	MCS0	2	211	7005	242/62	2.30	2.20	5.26	2.20		7.46	14.00	Pass
EHT40	MCS0	2	227	7085	Full	6.40	6.50	9.46	2.20		11.66	14.00	Pass
EHT40	MCS0	2	227	7085	242/62	2.80	3.10	5.96	2.20		8.16	14.00	Pass
EHT80	MCS0	2	199	6945	Full	8.30	8.40	11.36	2.20		13.56	14.00	Pass
EHT80	MCS0	2	199	6945	484/65	5.70	4.90	8.33	2.20		10.53	14.00	Pass
EHT80	MCS0	2	199	6945	Puncture20/1	7.80	7.60	10.71	2.20		12.91	14.00	Pass
EHT80	MCS0	2	215	7025	Full	8.40	8.30	11.36	2.20		13.56	14.00	Pass
EHT80	MCS0	2	215	7025	484/66	5.30	5.40	8.36	2.20		10.56	14.00	Pass
EHT80	MCS0	2	215	7025	Puncture20/1	7.80	7.50	10.66	2.20		12.86	14.00	Pass
EHT160	MCS0	2	207	6985	Full	8.50	8.60	11.56	2.20		13.76	14.00	Pass
EHT160	MCS0	2	207	6985	996/S67	6.70	6.70	9.71	2.20		11.91	14.00	Pass
EHT160	MCS0	2	207	6985	Puncture20/1	8.40	8.50	11.46	2.20		13.66	14.00	Pass
EHT160	MCS0	2	207	6985	Puncture40/1	8.00	7.90	10.96	2.20		13.16	14.00	Pass

U-NII-8 straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 7	Ant 6	SUM	Ant 7	Ant 6			
EHT320	MCS0	2	159	6745	Full	8.80	8.20	11.52	2.20		13.72	14.00	Pass
EHT320	MCS0	2	159	6745	2*996/70	6.10	6.40	9.26	2.20		11.46	14.00	Pass
EHT320	MCS0	2	159	6745	Puncture40/8	8.50	8.10	11.31	2.20		13.51	14.00	Pass
EHT320	MCS0	2	159	6745	Puncture80/4	8.10	7.80	10.96	2.20		13.16	14.00	Pass
EHT320	MCS0	2	159	6745	Puncture80+40/6	7.90	7.30	10.62	2.20		12.82	14.00	Pass
EHT320	MCS0	2	191	6905	Full	8.90	8.50	11.71	2.20		13.91	14.00	Pass
EHT320	MCS0	2	191	6905	2*996/70	5.90	5.80	8.86	2.20		11.06	14.00	Pass
EHT320	MCS0	2	191	6905	Puncture40/1	8.80	8.40	11.61	2.20		13.81	14.00	Pass
EHT320	MCS0	2	191	6905	Puncture80/1	8.00	7.90	10.96	2.20		13.16	14.00	Pass
EHT320	MCS0	2	191	6905	Puncture80+40/7	7.60	7.30	10.46	2.20		12.66	14.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT20	MCS0	2	189	6895	Full	0.67	0.66			-6.99	1.59		-5.40	-5.00	Pass
EHT20	MCS0	2	189	6895	26/0	0.66	0.66			-7.09	1.59		-5.50	-5.00	Pass
EHT20	MCS0	2	189	6895	52/37	0.57	0.58			-7.02	1.59		-5.43	-5.00	Pass
EHT20	MCS0	2	189	6895	106/53	0.66	0.67			-7.11	1.59		-5.52	-5.00	Pass
EHT20	MCS0	2	209	6995	Full	0.67	0.66			-6.78	1.59		-5.19	-5.00	Pass
EHT20	MCS0	2	209	6995	26/4	0.66	0.66			-7.04	1.59		-5.45	-5.00	Pass
EHT20	MCS0	2	209	6995	52/38	0.57	0.58			-7.21	1.59		-5.62	-5.00	Pass
EHT20	MCS0	2	209	6995	106/53	0.66	0.67			-6.83	1.59		-5.24	-5.00	Pass
EHT20	MCS0	2	229	7095	Full	0.66	0.67			-6.85	1.59		-5.26	-5.00	Pass
EHT20	MCS0	2	229	7095	26/8	0.66	0.66			-7.28	1.59		-5.69	-5.00	Pass
EHT20	MCS0	2	229	7095	52/40	0.57	0.58			-7.23	1.59		-5.64	-5.00	Pass
EHT20	MCS0	2	229	7095	106/54	0.66	0.67			-7.37	1.59		-5.78	-5.00	Pass
EHT20	MCS0	2	229	7095	52+26/72	0.65	0.66			-6.94	1.59		-5.35	-5.00	Pass
EHT20	MCS0	2	229	7095	106+26/83	0.67	0.66			-7.10	1.59		-5.51	-5.00	Pass
EHT20	MCS0	2	233	7115	Full	0.67	0.66			-6.62	1.59		-5.03	-5.00	Pass
EHT20	MCS0	2	233	7115	26/8	0.66	0.66			-6.65	1.59		-5.06	-5.00	Pass
EHT20	MCS0	2	233	7115	52/40	0.57	0.58			-6.75	1.59		-5.16	-5.00	Pass
EHT20	MCS0	2	233	7115	106/54	0.66	0.67			-6.67	1.59		-5.08	-5.00	Pass
EHT20	MCS0	2	233	7115	52+26/72	0.65	0.66			-6.73	1.59		-5.14	-5.00	Pass
EHT20	MCS0	2	233	7115	106+26/83	0.67	0.66			-6.91	1.59		-5.32	-5.00	Pass
EHT40	MCS0	2	195	6925	Full	0.67	0.67			-6.69	1.59		-5.10	-5.00	Pass
EHT40	MCS0	2	195	6925	242/61	0.67	0.67			-7.05	1.59		-5.46	-5.00	Pass
EHT40	MCS0	2	211	7005	Full	0.67	0.67			-7.05	1.59		-5.46	-5.00	Pass
EHT40	MCS0	2	211	7005	242/62	0.67	0.67			-7.30	1.59		-5.71	-5.00	Pass
EHT40	MCS0	2	227	7085	Full	0.67	0.67			-6.60	1.59		-5.01	-5.00	Pass
EHT40	MCS0	2	227	7085	242/62	0.67	0.67			-7.03	1.59		-5.44	-5.00	Pass
EHT80	MCS0	2	199	6945	Full	0.68	0.69			-7.15	1.59		-5.56	-5.00	Pass
EHT80	MCS0	2	199	6945	484/65	0.68	0.68			-7.49	1.59		-5.90	-5.00	Pass
EHT80	MCS0	2	199	6945	Puncture20/1	0.68	0.68			-7.20	1.59		-5.61	-5.00	Pass
EHT80	MCS0	2	215	7025	Full	0.68	0.69			-6.97	1.59		-5.38	-5.00	Pass
EHT80	MCS0	2	215	7025	484/66	0.68	0.68			-7.22	1.59		-5.63	-5.00	Pass
EHT80	MCS0	2	215	7025	Puncture20/1	0.68	0.68			-7.09	1.59		-5.50	-5.00	Pass
EHT160	MCS0	2	207	6985	Full	0.69	0.69		-9.49	1.59		-7.90	-5.00	Pass	
EHT160	MCS0	2	207	6985	996/S67	0.67	0.67		-9.80	1.59		-8.21	-5.00	Pass	
EHT160	MCS0	2	207	6985	Puncture20/1	0.02	0.00		-9.51	1.59		-7.92	-5.00	Pass	
EHT160	MCS0	2	207	6985	Puncture40/1	0.68	0.68		-9.51	1.59		-7.92	-5.00	Pass	

U-NII-8 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant 7	Ant 6	Ant 7	Ant 6	SUM	Ant 7	Ant 6	SUM		
EHT320	MCS0	2	159	6745	Full	0.68	0.68			-12.31	1.59	-10.72	-5.00	Pass	
EHT320	MCS0	2	159	6745	2*996/70	0.67	0.67			-12.34	1.59	-10.75	-5.00	Pass	
EHT320	MCS0	2	159	6745	Puncture40/8	0.67	0.67			-12.36	1.59	-10.77	-5.00	Pass	
EHT320	MCS0	2	159	6745	Puncture80/4	0.67	0.67			-12.54	1.59	-10.95	-5.00	Pass	
EHT320	MCS0	2	159	6745	Puncture80+40/6	0.67	0.67			-12.35	1.59	-10.76	-5.00	Pass	
EHT320	MCS0	2	191	6905	Full	0.68	0.68			-12.17	1.59	-10.58	-5.00	Pass	
EHT320	MCS0	2	191	6905	2*996/70	0.67	0.67			-12.61	1.59	-11.02	-5.00	Pass	
EHT320	MCS0	2	191	6905	Puncture40/1	0.67	0.67			-12.82	1.59	-11.23	-5.00	Pass	
EHT320	MCS0	2	191	6905	Puncture80/1	0.67	0.67			-12.32	1.59	-10.73	-5.00	Pass	
EHT320	MCS0	2	191	6905	Puncture80+40/7	0.67	0.67			-12.24	1.59	-10.65	-5.00	Pass	




<CDD Mode>

Test Result of 26dB & 99% Occupied Bandwidth


MIMO <Ant. 7+6>

<802.11a>


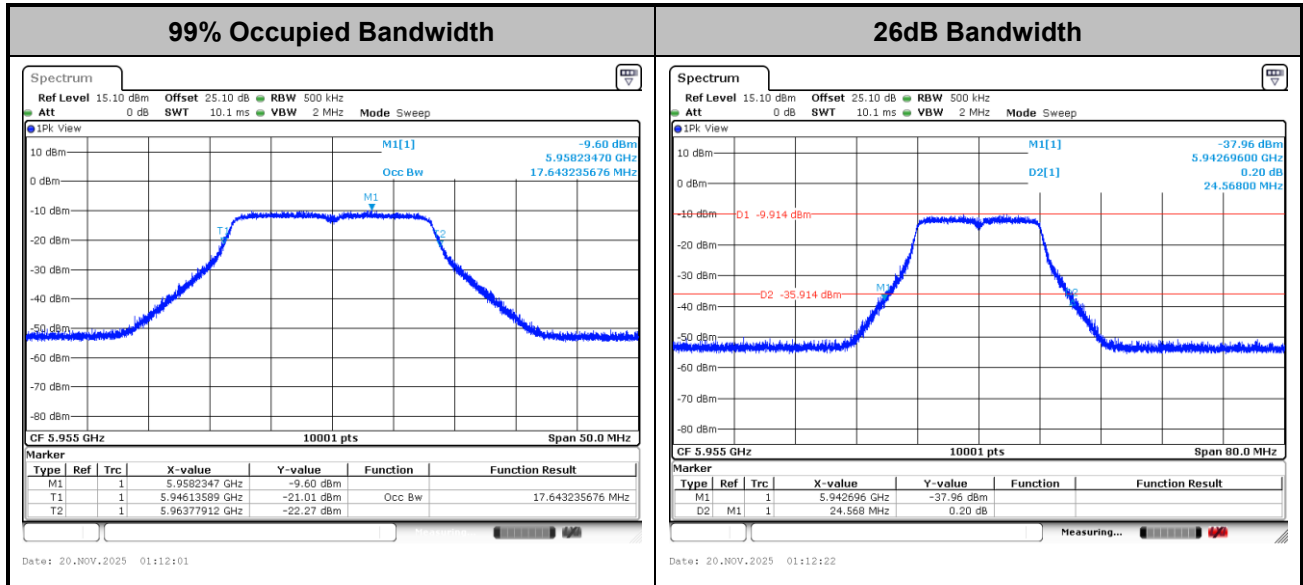
**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

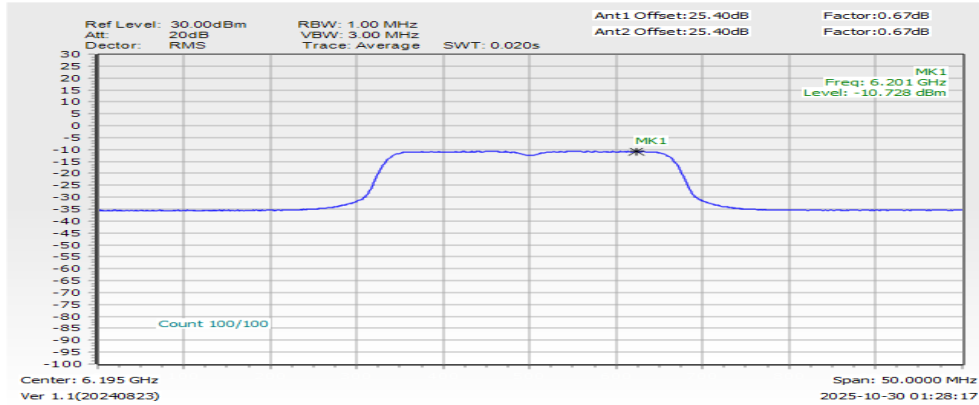Maximum Power Density Plot (dBm/MHz)**Note:**

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

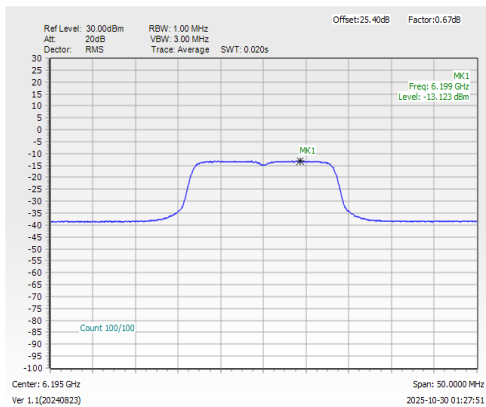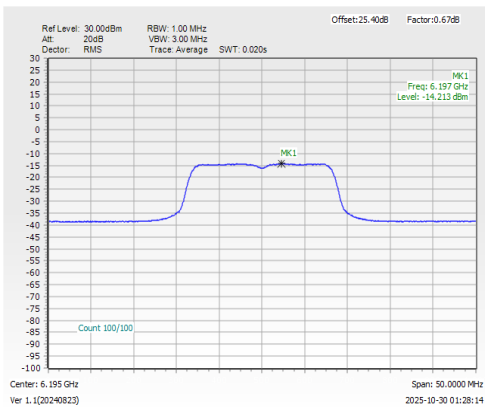Power Density Plot Trace 1 (Ant 7)**Power Density Plot Trace 2 (Ant 6)**




In-Band Emissions (Channel Mask)

MIMO <Ant. 7+6(Ant7)>

EUT Mode


802.11a

Plot on 5955 MHz

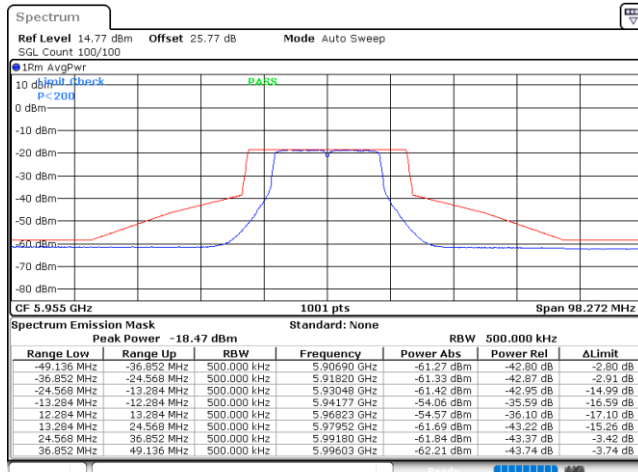


Date: 20.NOV.2025 01:12:47

Plot on 6195 MHz

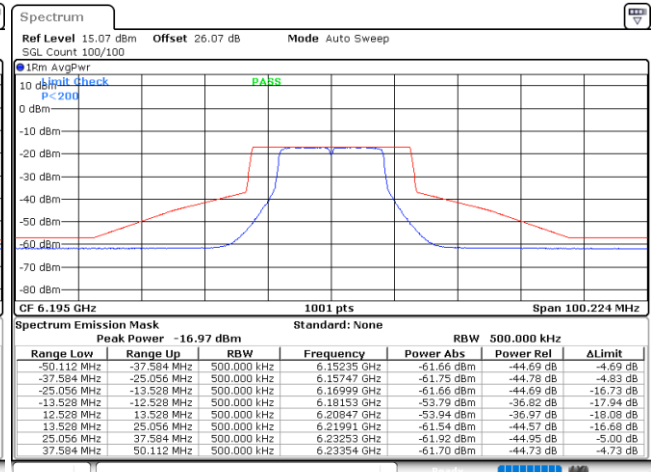


Date: 20.NOV.2025 01:17:58

Plot on 6415 MHz

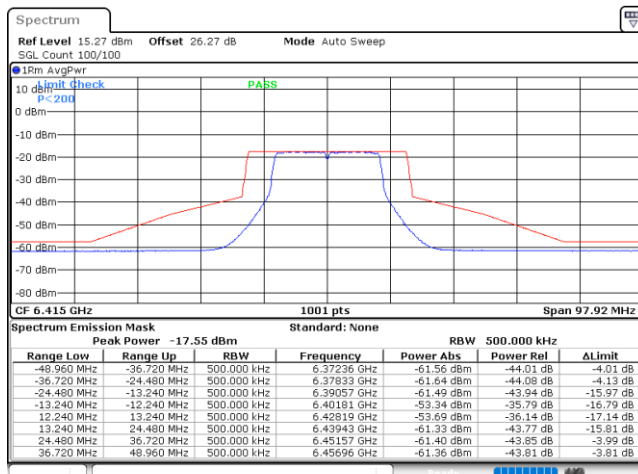

Date: 20.NOV.2025 01:21:16


Plot on 6435 MHz

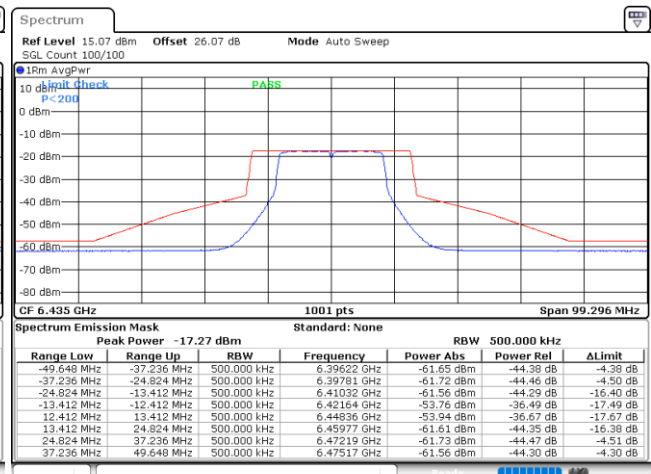

Date: 20.NOV.2025 01:24:18




Plot on 6475 MHz

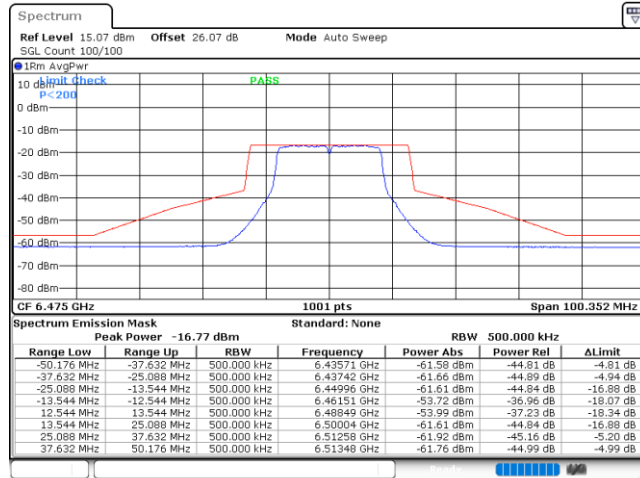


Date: 20.NOV.2025 01:27:15

Plot on 6515 MHz

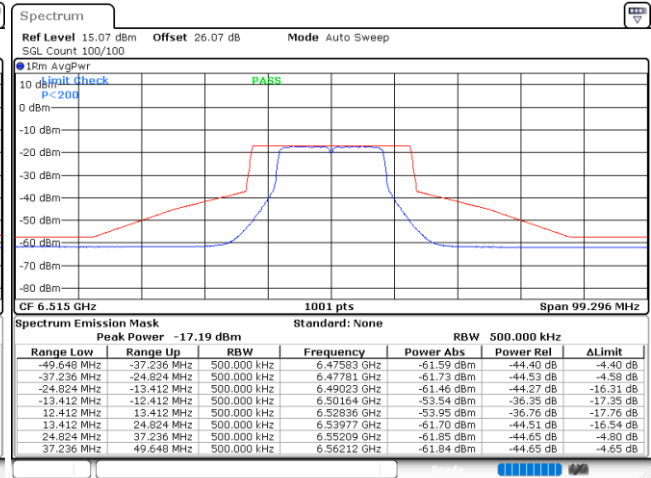


Date: 20.NOV.2025 01:30:24

Plot on 6535 MHz

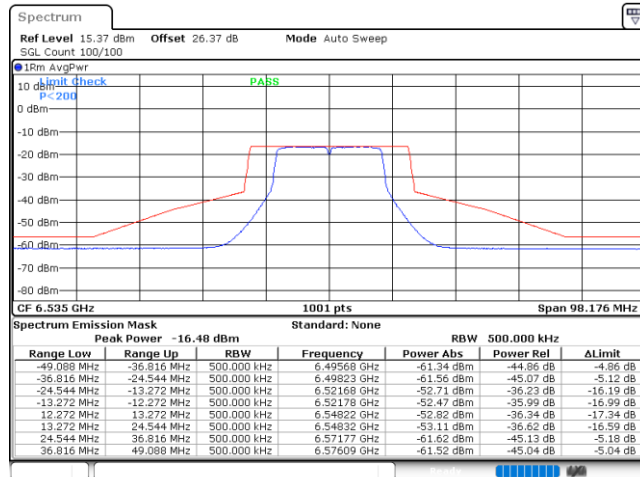

Date: 20.NOV.2025 01:34:50


Plot on 6695 MHz

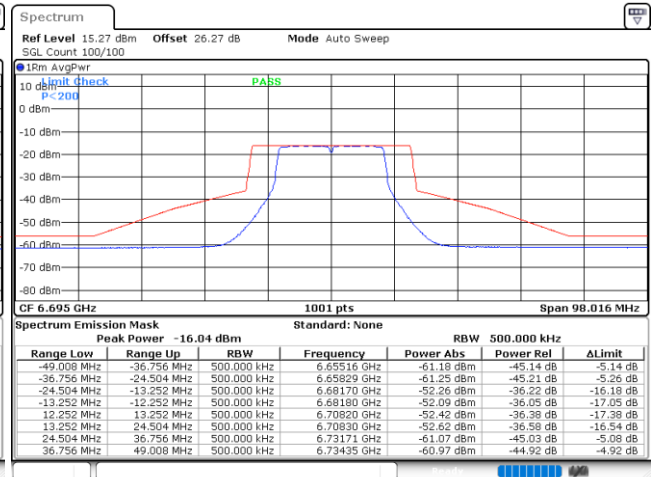

Date: 20.NOV.2025 01:38:43




Plot on 6855 MHz

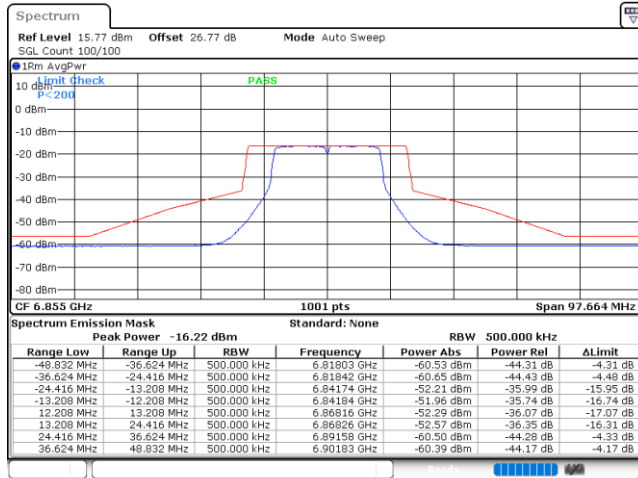


Date: 20.NOV.2025 01:42:06

Plot on 6875 MHz

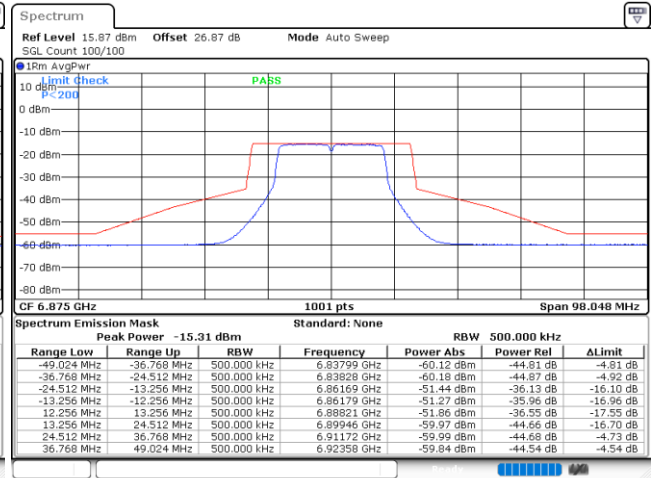


Date: 20.NOV.2025 19:09:44

Plot on 6895 MHz

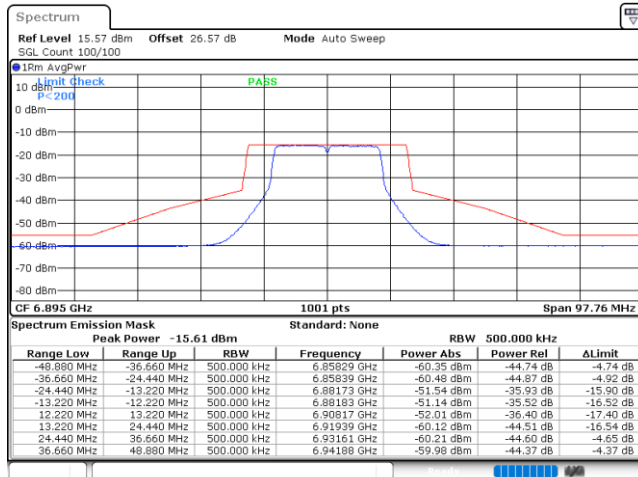

Date: 20.NOV.2025 19:13:05


Plot on 6995 MHz

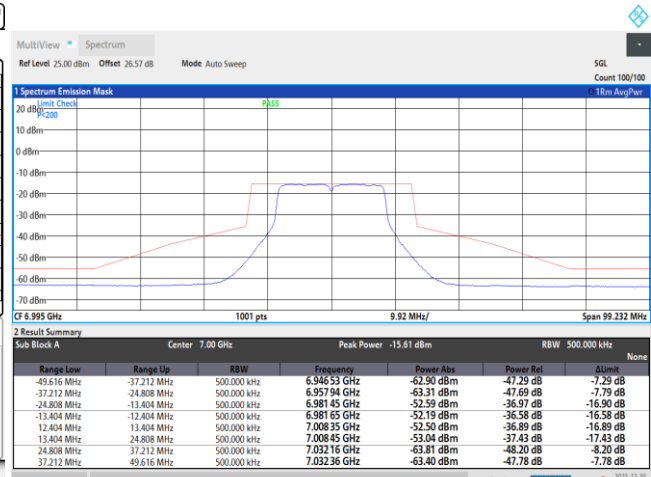

07:36:40 PM 11/20/2025




Plot on 7095 MHz

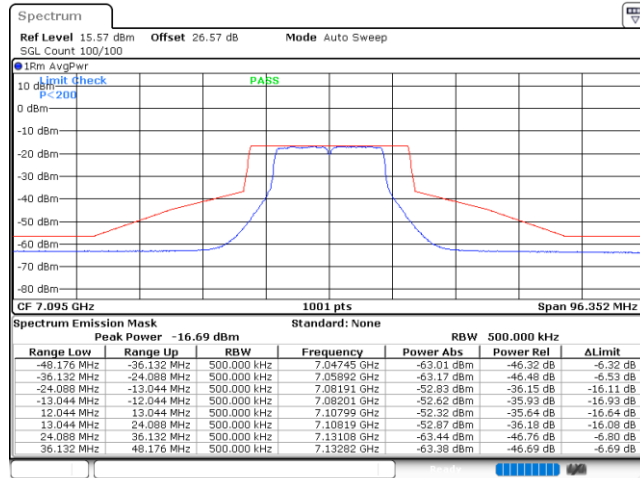

Date: 4.DEC.2025 23:01:30

Plot on 7115 MHz

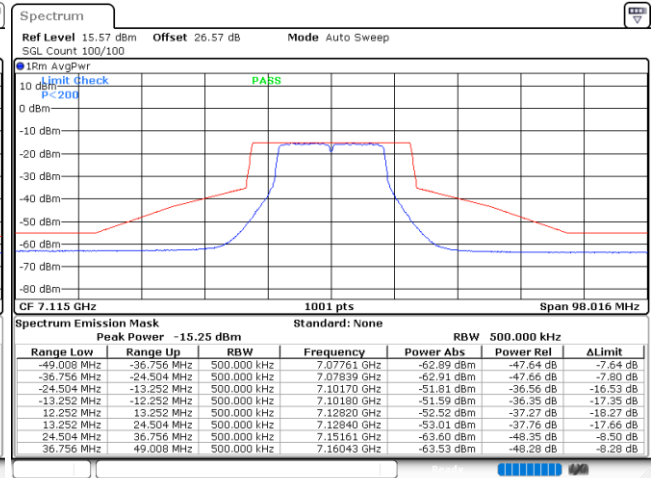

Date: 20.NOV.2025 19:19:25




MIMO <Ant. 7+6(Ant6)>

EUT Mode


802.11a

Plot on 5955 MHz

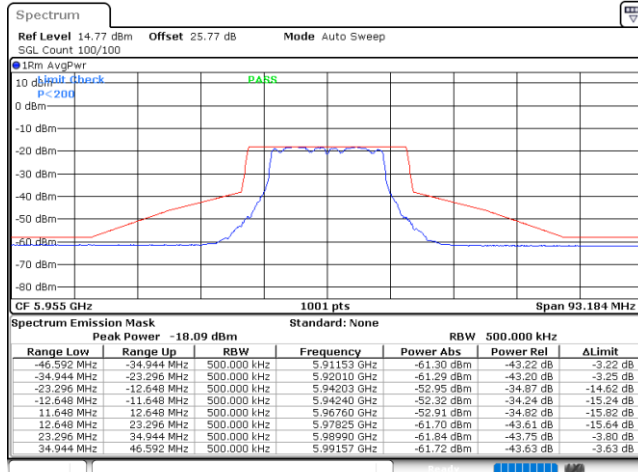


Date: 20.NOV.2025 01:14:01

Plot on 6195 MHz

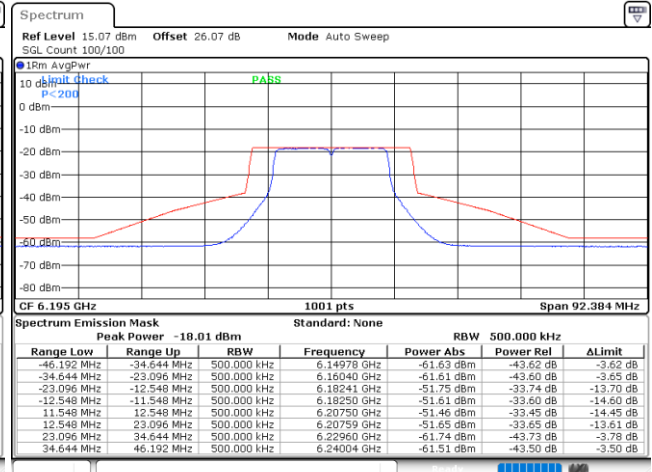


Date: 20.NOV.2025 01:19:06

Plot on 6415 MHz

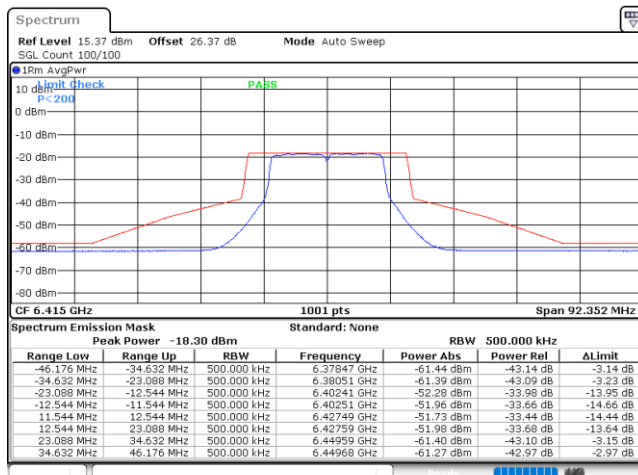

Date: 20.NOV.2025 01:22:19


Plot on 6435 MHz

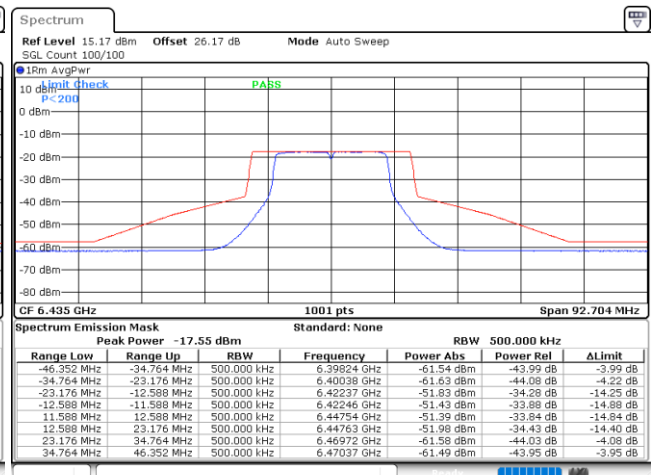

Date: 20.NOV.2025 01:25:29




Plot on 6475 MHz

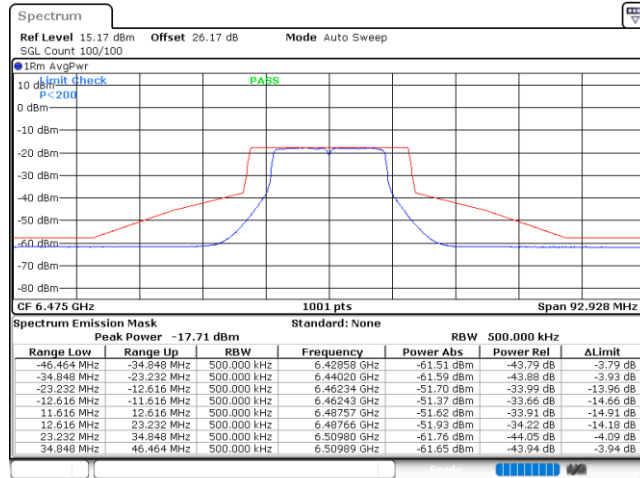


Date: 20.NOV.2025 01:28:21

Plot on 6515 MHz

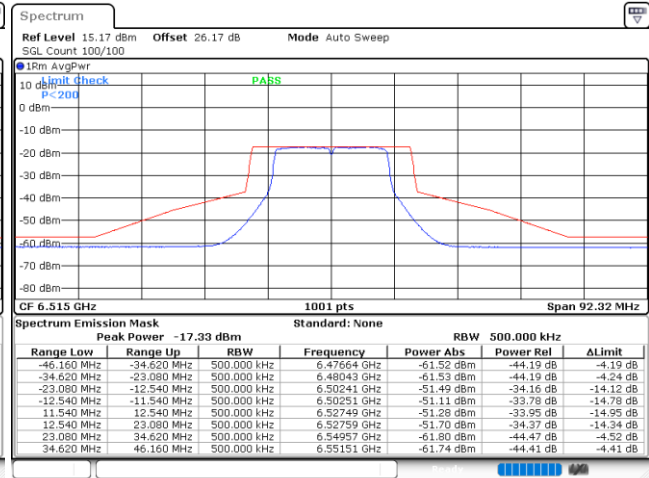


Date: 20.NOV.2025 01:31:28

Plot on 6535 MHz

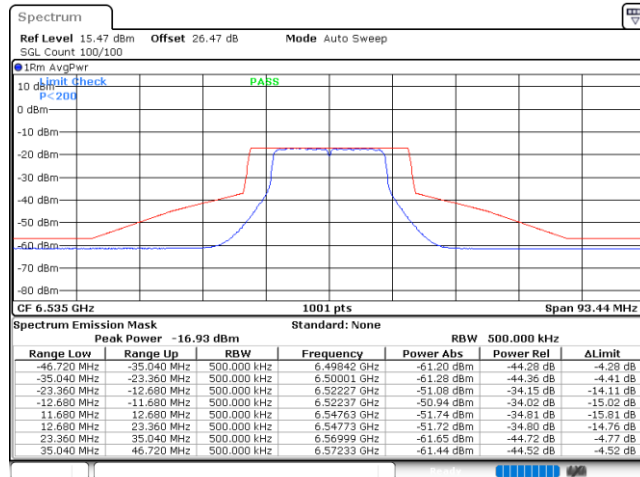

Date: 20.NOV.2025 01:36:02


Plot on 6695 MHz

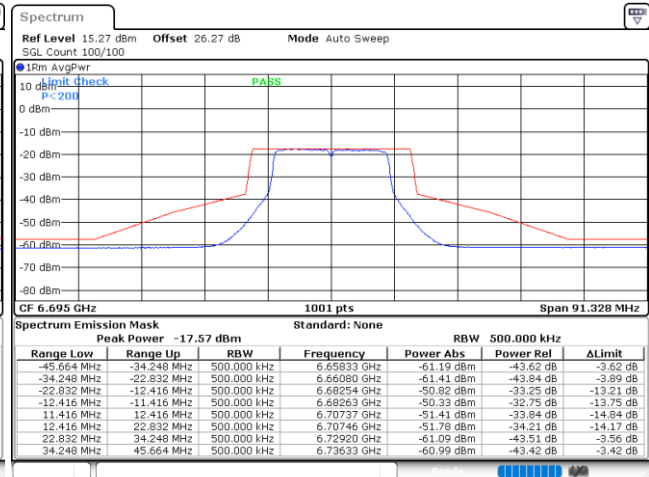

Date: 20.NOV.2025 01:39:55




Plot on 6855 MHz

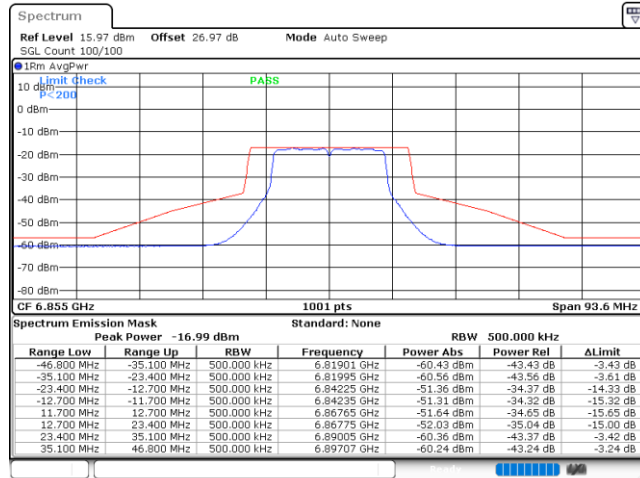


Date: 20.NOV.2025 01:43:12

Plot on 6875 MHz

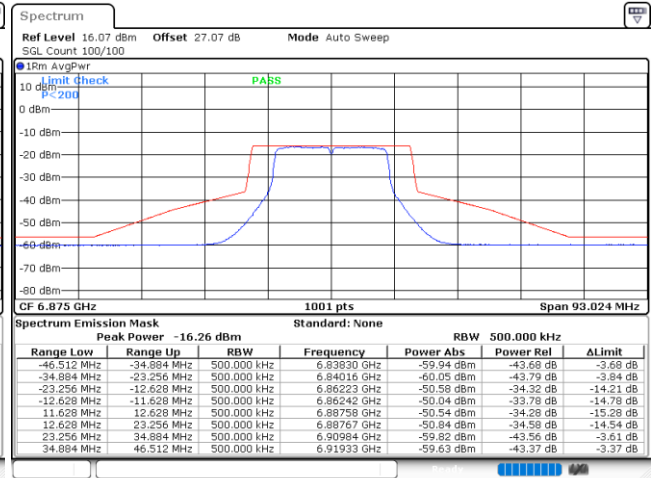


Date: 20.NOV.2025 19:10:51

Plot on 6895 MHz

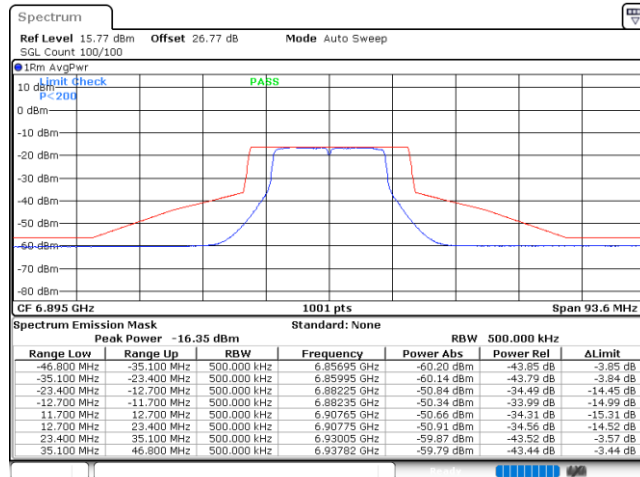

Date: 20.NOV.2025 19:14:13


Plot on 6995 MHz

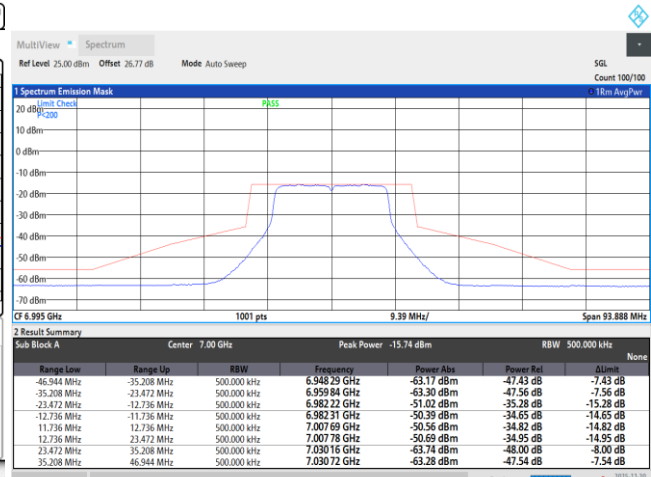

07:38:45 PM 11/20/2025




Plot on 7095 MHz

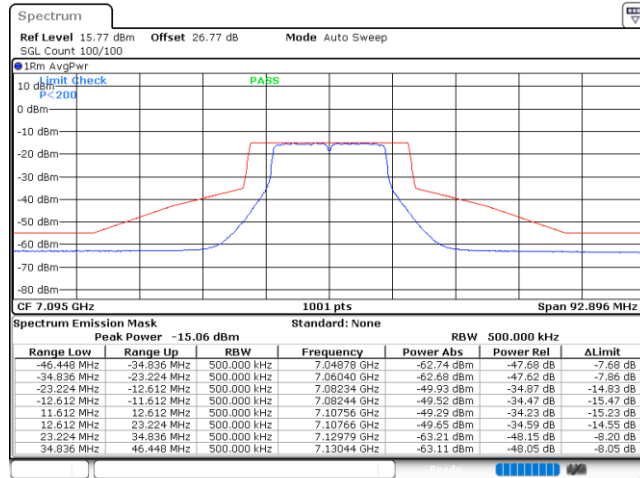

Date: 4.DEC.2025 23:02:26

Plot on 7115 MHz

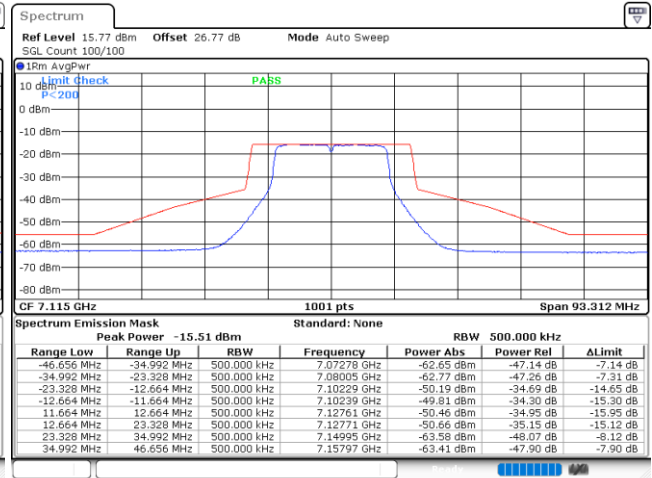

Date: 20.NOV.2025 19:20:36




<SDM Mode >

Test Result of 26dB & 99% Occupied Bandwidth


MIMO <Ant. 7+6>

<802.11be EHT20>

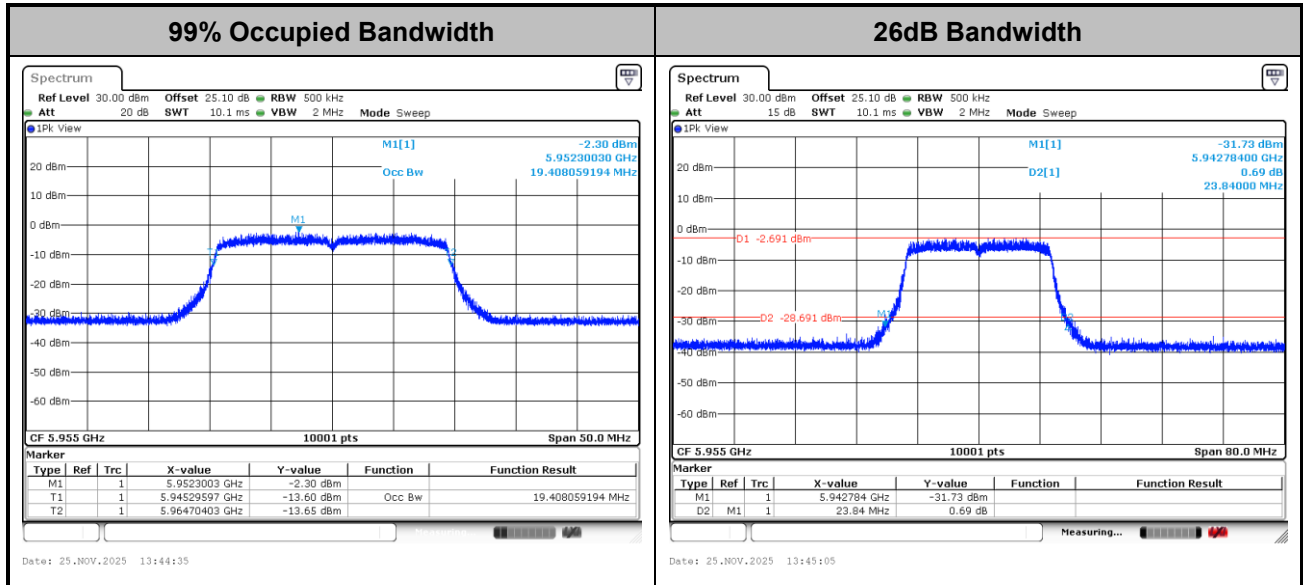**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

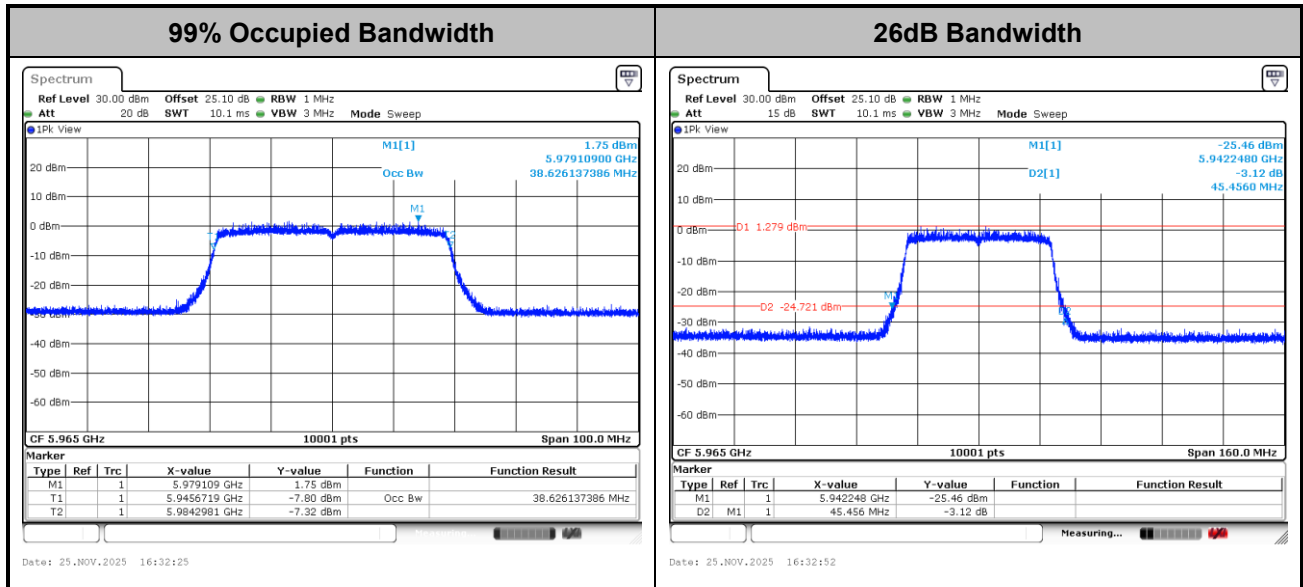

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT80>

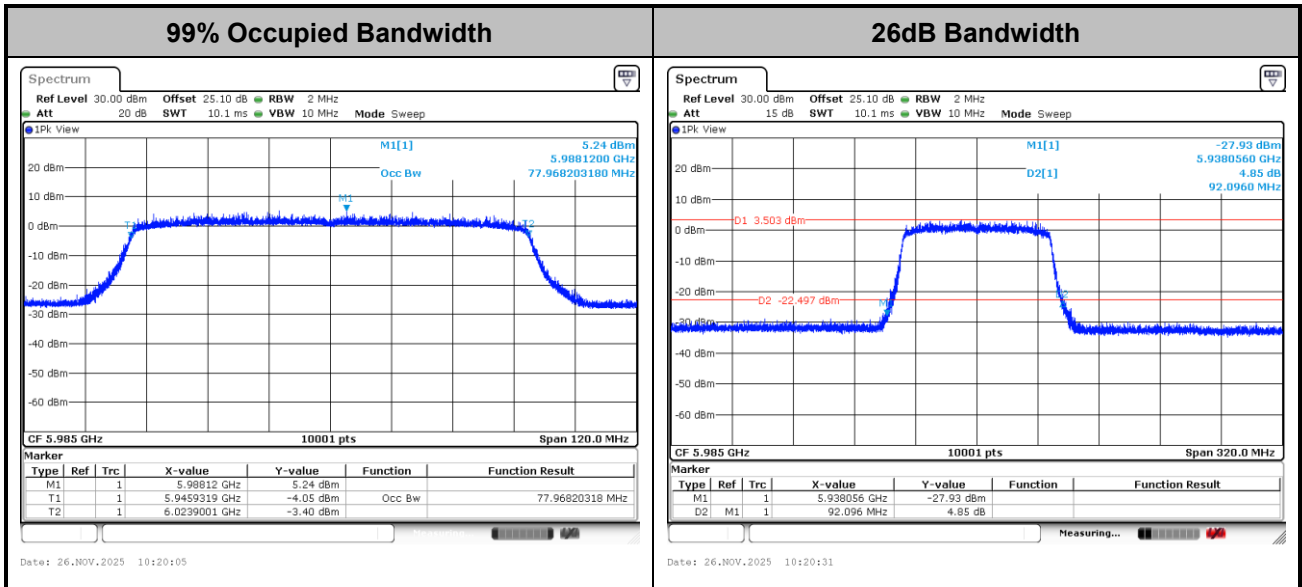

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

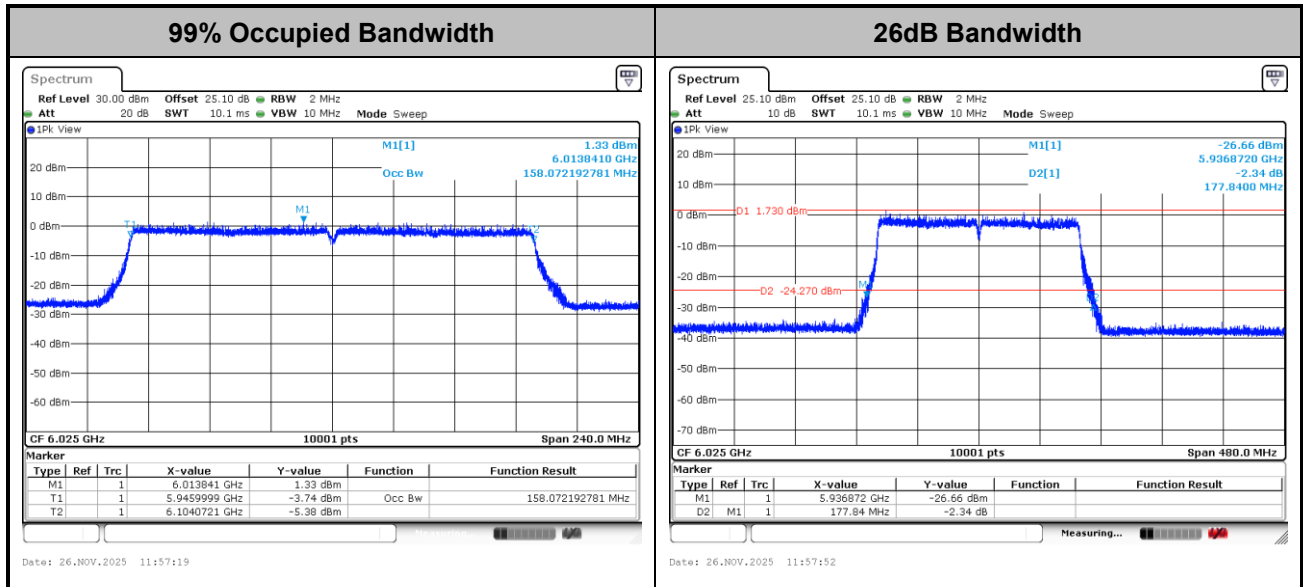

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT320>

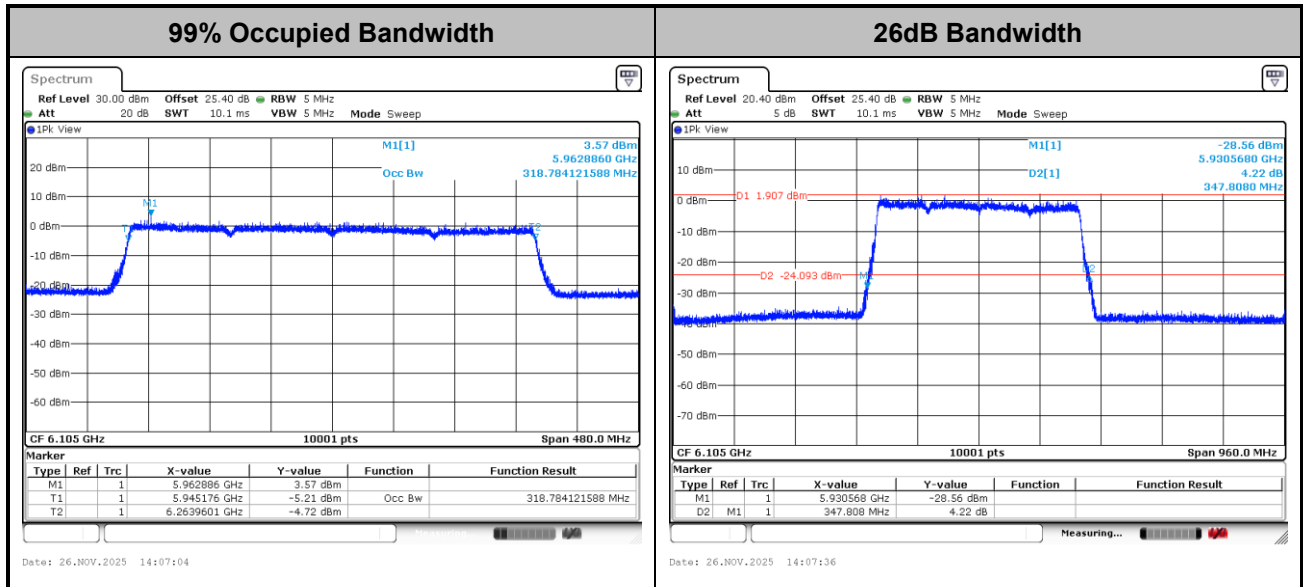



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11ax HE20>

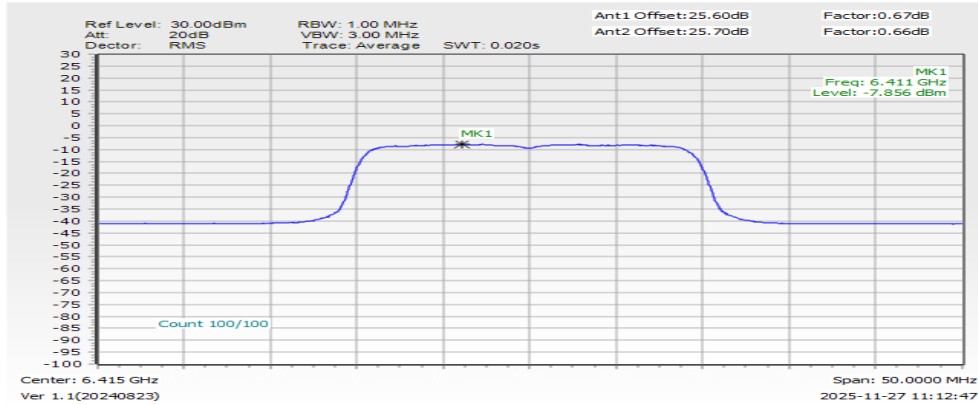Maximum Power Density Plot (dBm/MHz)**Note:**


- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

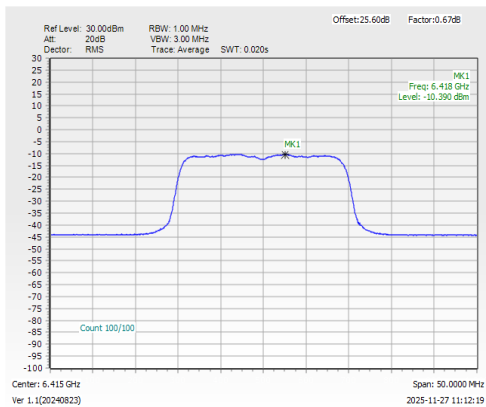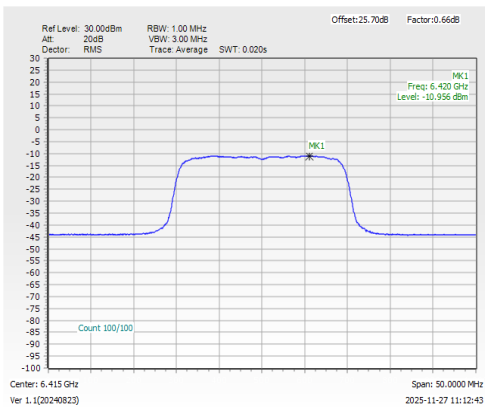Power Density Plot Trace 1 (Ant 7)**Power Density Plot Trace 2 (Ant 6)**



<802.11ax HE40>


Maximum Power Density Plot (dBm/MHz)

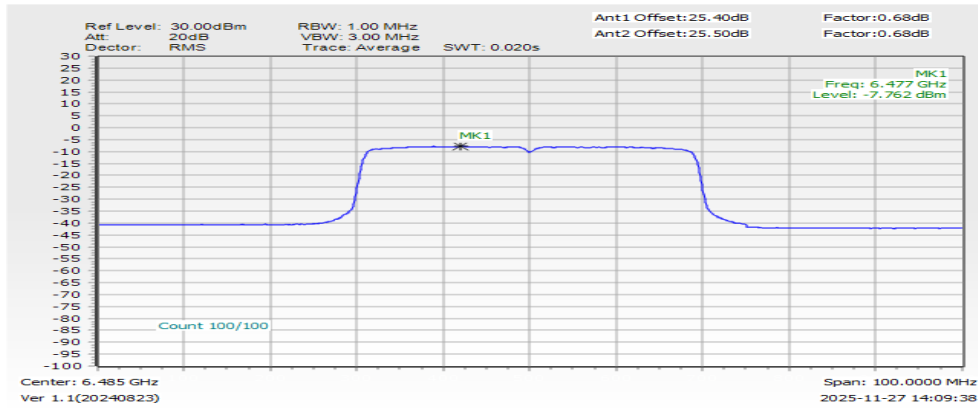


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

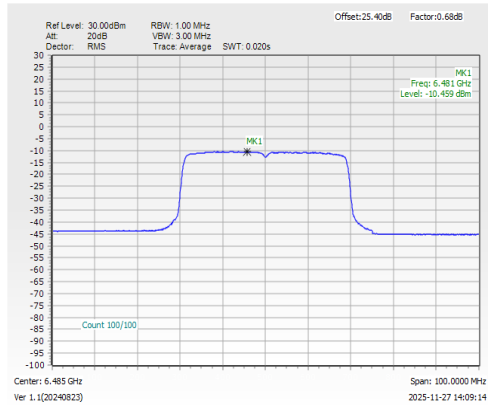


Power Density Plot Trace 2 (Ant 6)

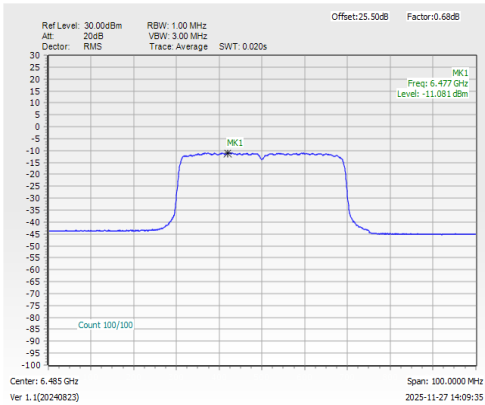



<802.11ax HE80>


Maximum Power Density Plot (dBm/MHz)

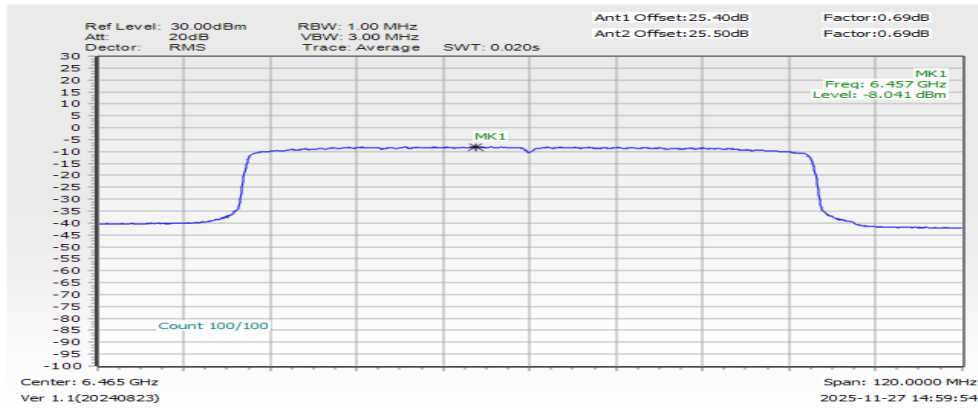


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

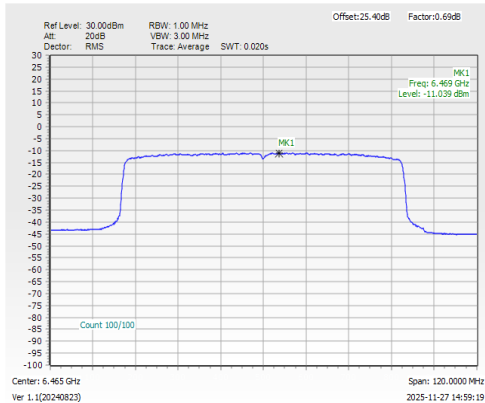


Power Density Plot Trace 2 (Ant 6)

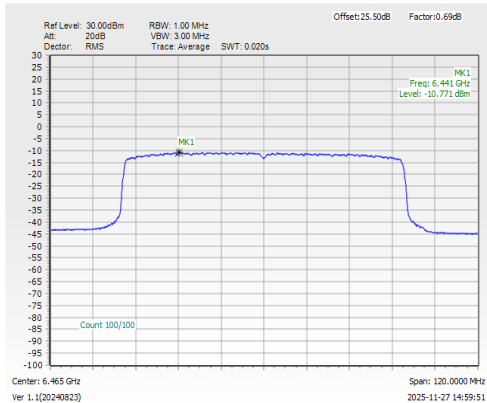



<802.11ax HE160>


Maximum Power Density Plot (dBm/MHz)

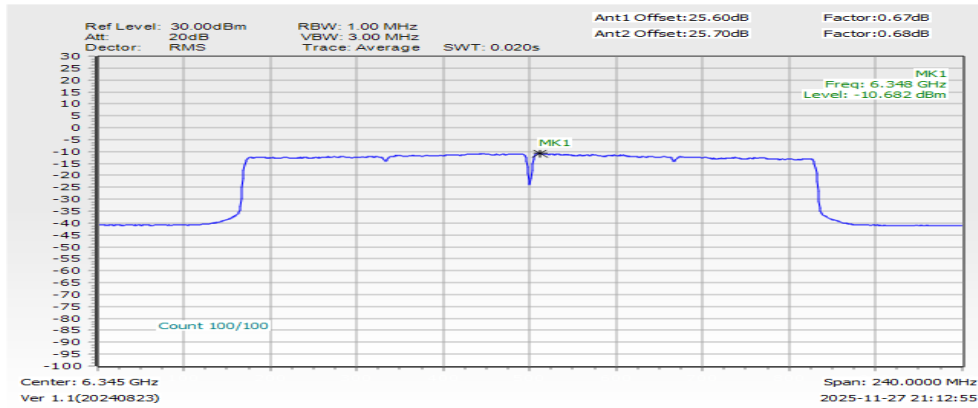


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

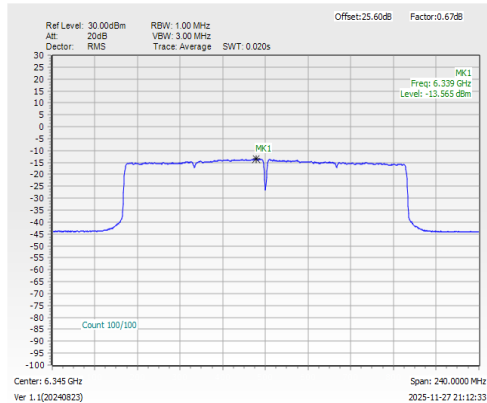


Power Density Plot Trace 2 (Ant 6)

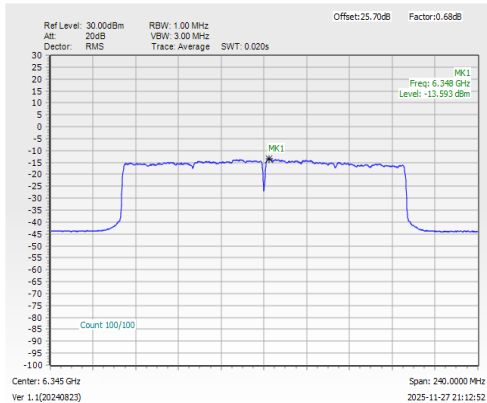



<802.11be EHT20>


Maximum Power Density Plot (dBm/MHz)

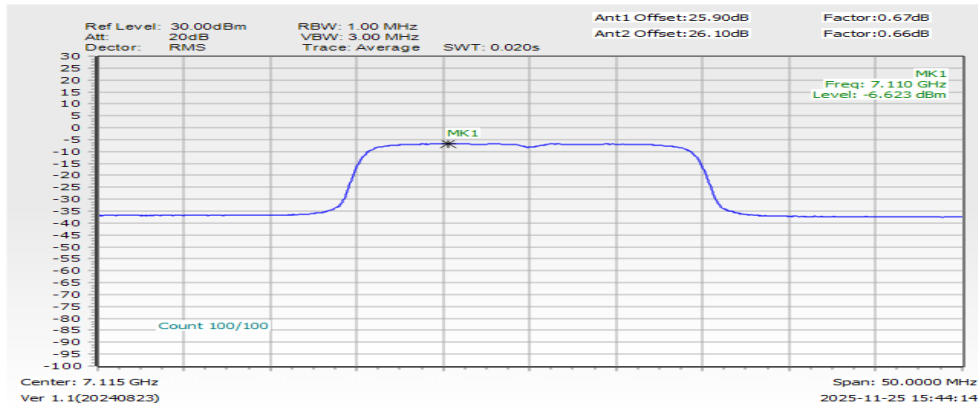


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

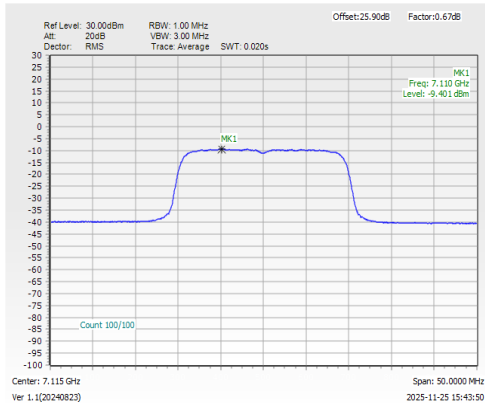


Power Density Plot Trace 2 (Ant 6)

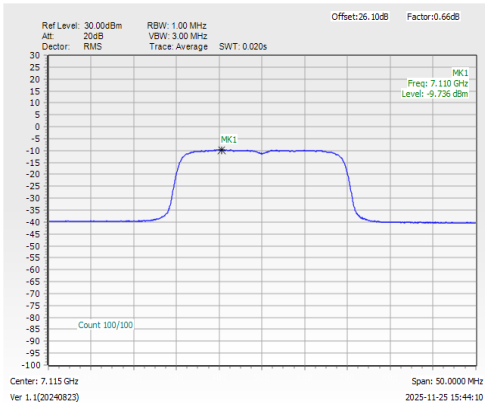



<802.11be EHT40>


Maximum Power Density Plot (dBm/MHz)

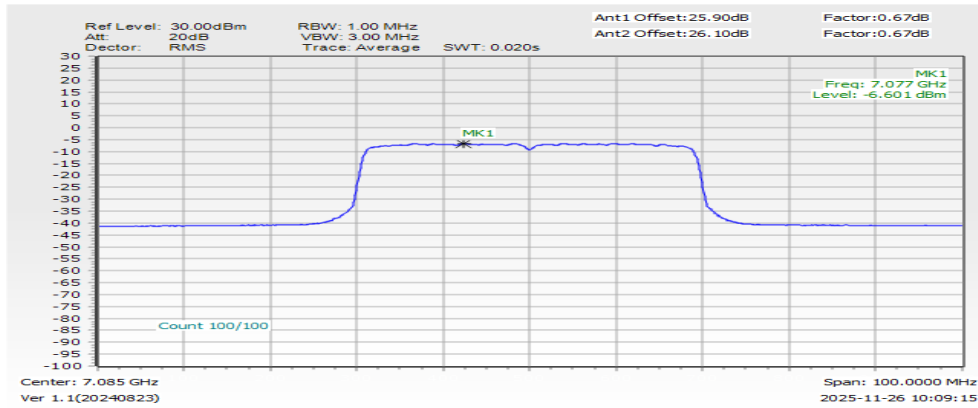


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

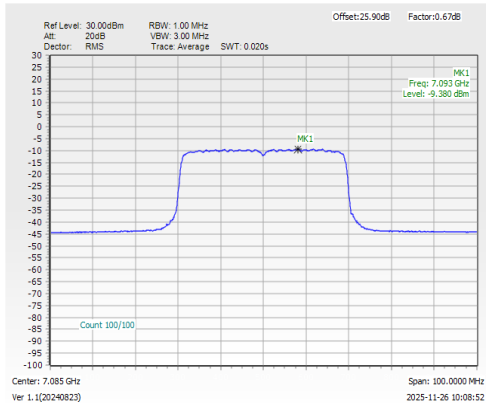


Power Density Plot Trace 2 (Ant 6)

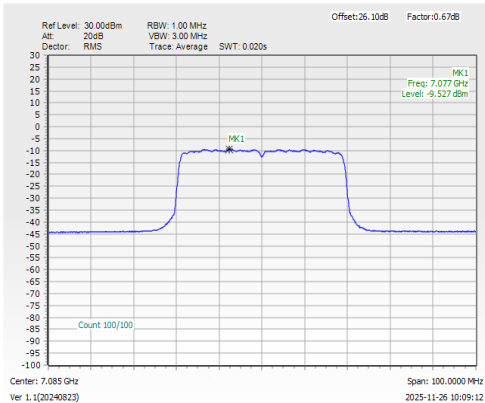



<802.11be EHT80>


Maximum Power Density Plot (dBm/MHz)

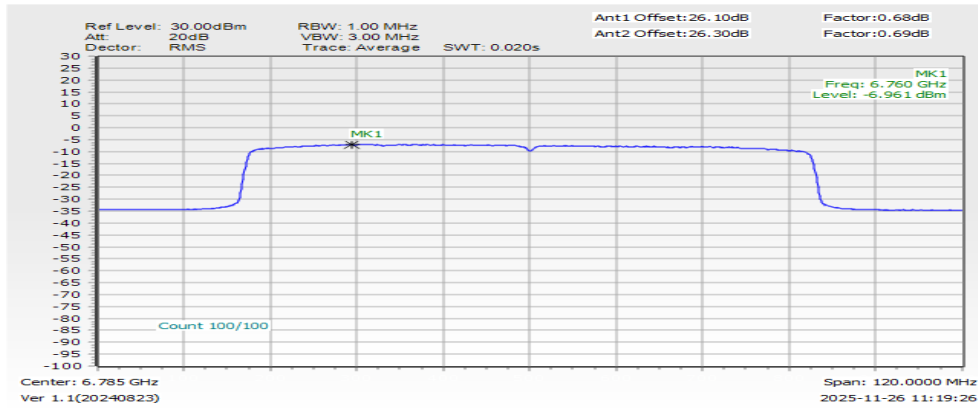


Note:

1. EIRP Power Density (dBm/MHz) = Measured value + Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

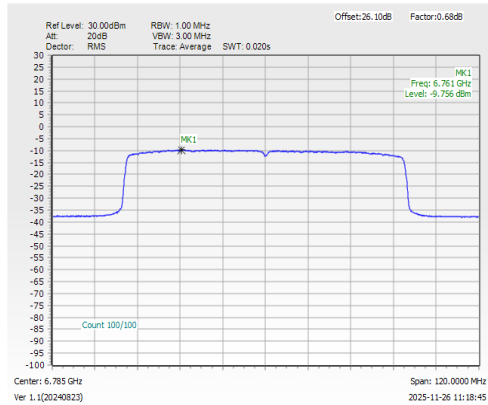


Power Density Plot Trace 2 (Ant 6)

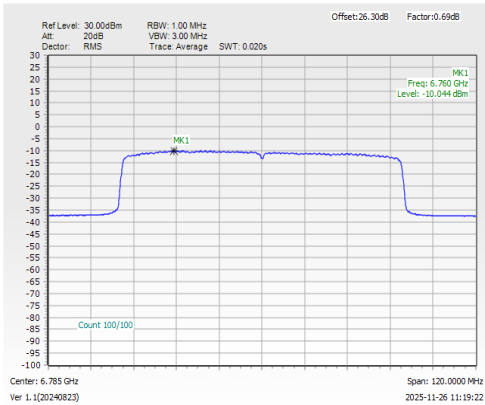



<802.11be EHT160>


Maximum Power Density Plot (dBm/MHz)

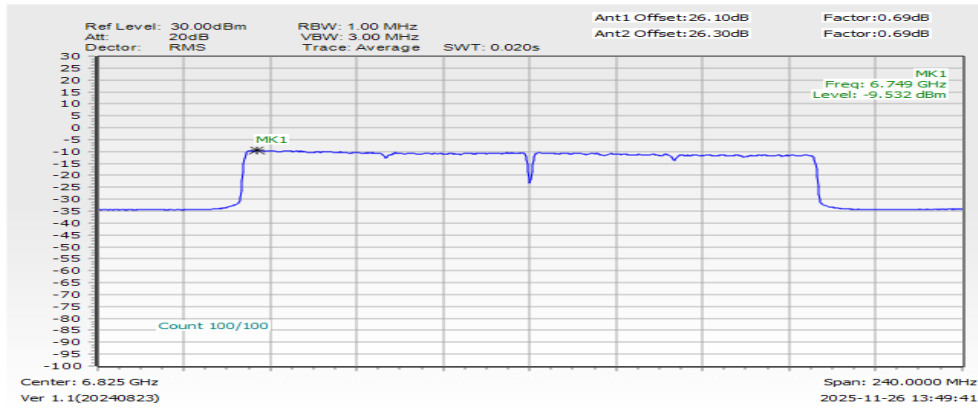


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

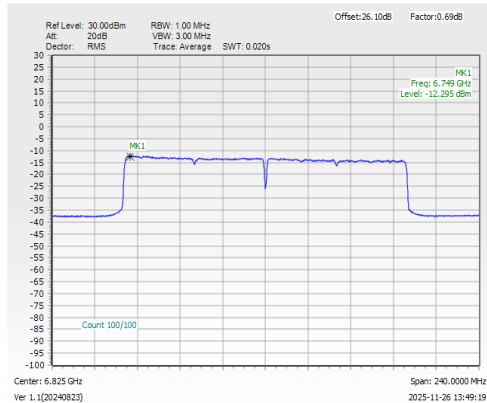


Power Density Plot Trace 2 (Ant 6)

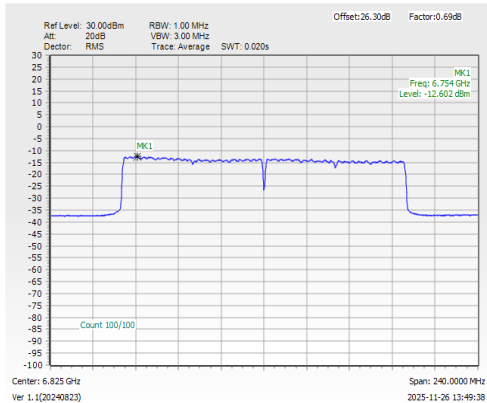



<802.11be EHT320>


Maximum Power Density Plot (dBm/MHz)

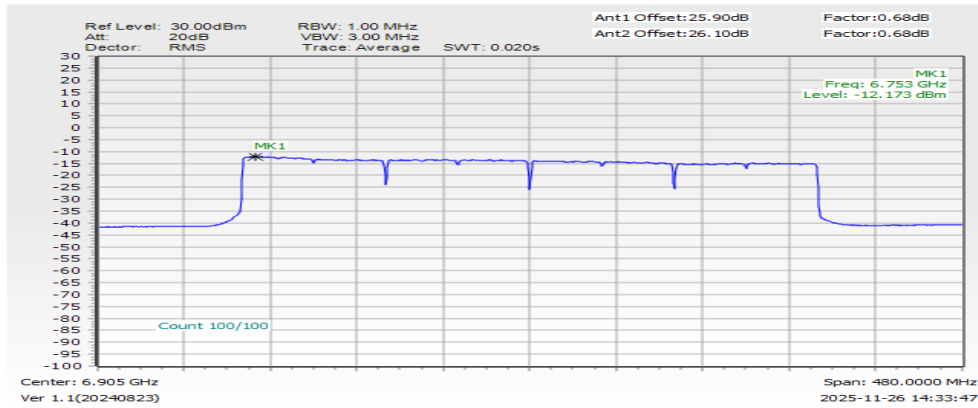


Note:

- 1.EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
- 2.The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 7)

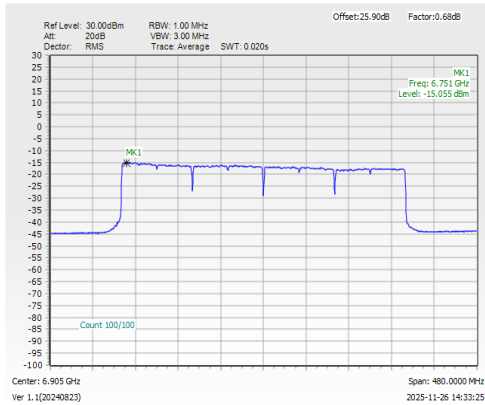

Power Density Plot Trace 2 (Ant 6)

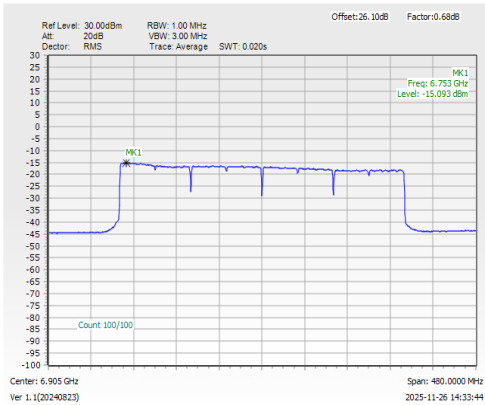




In-Band Emissions (Channel Mask)

MIMO <Ant. 7+6(Ant7)>

EUT Mode


802.11be EHT20 FullIRU

Plot on 5955 MHz

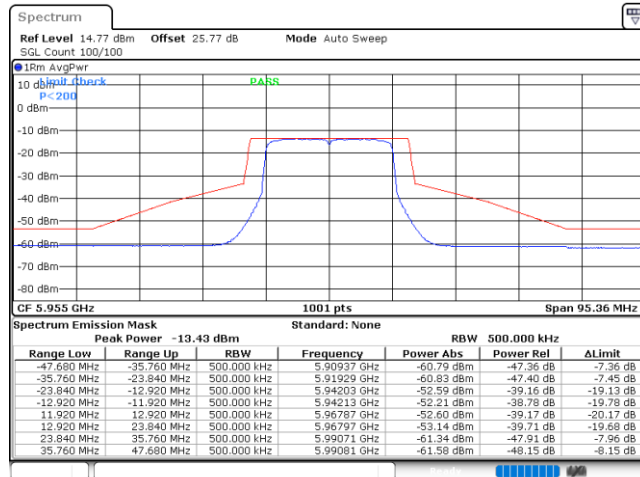


Date: 25.NOV.2025 14:31:44

Plot on 6195 MHz

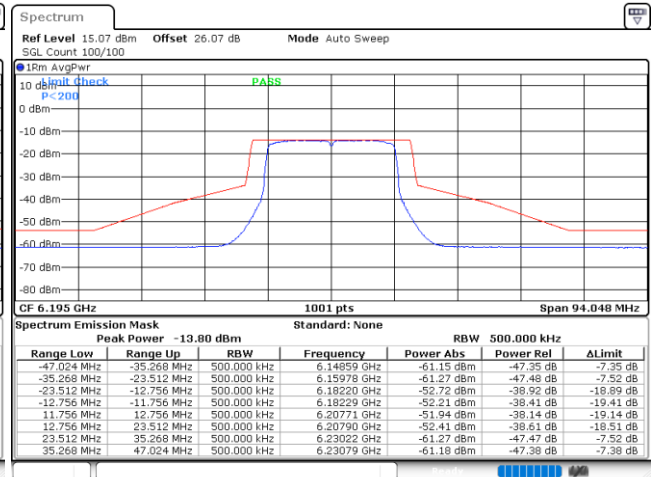


Date: 25.NOV.2025 13:56:32

Plot on 6415 MHz

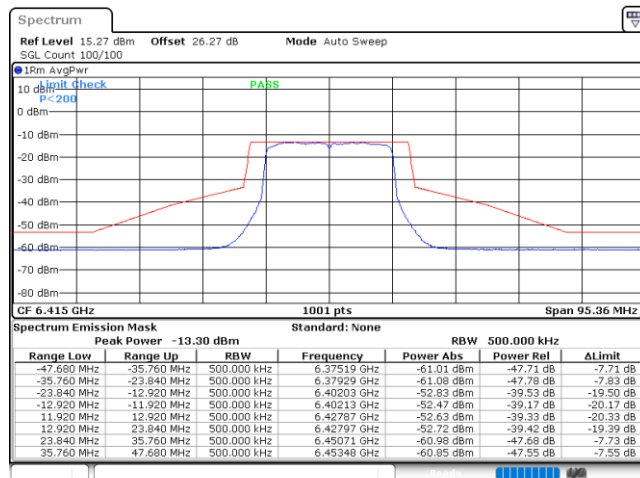

Date: 25.NOV.2025 14:04:16


Plot on 6435 MHz

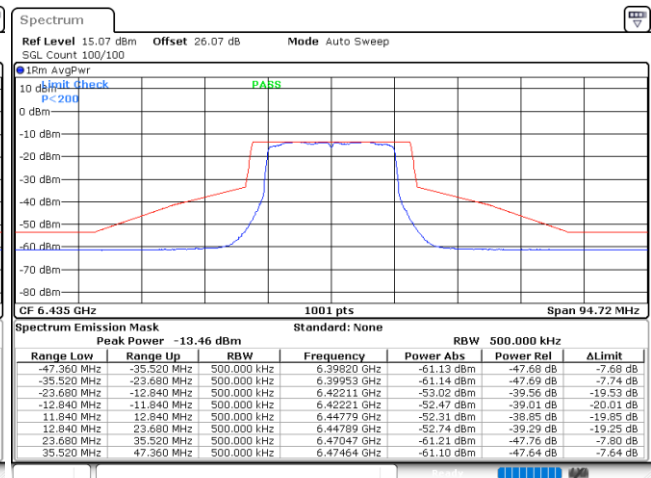

Date: 25.NOV.2025 14:12:15




Plot on 6475 MHz

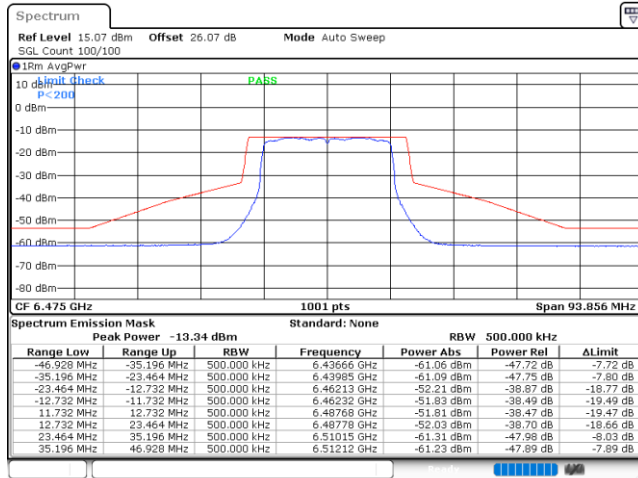


Date: 25.NOV.2025 14:17:11

Plot on 6515 MHz

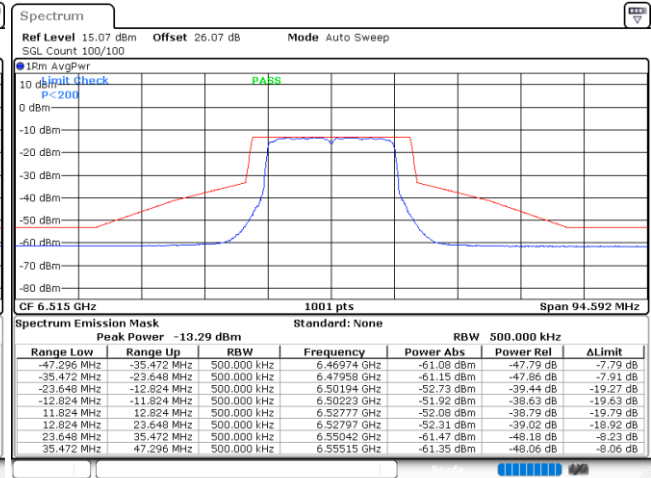


Date: 25.NOV.2025 14:40:42

Plot on 6535 MHz

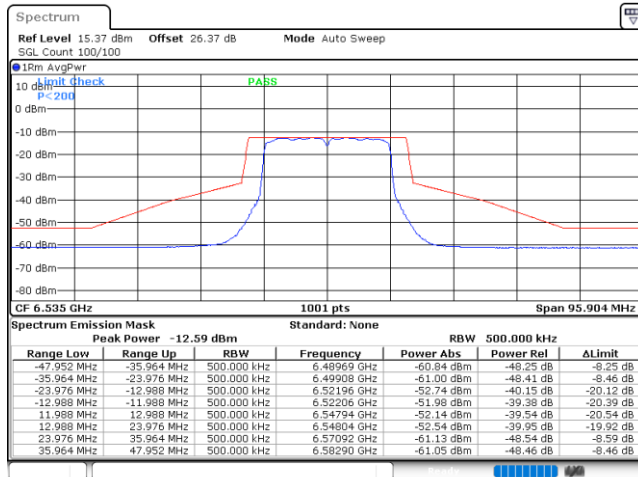

Date: 25.NOV.2025 14:51:32


Plot on 6695 MHz

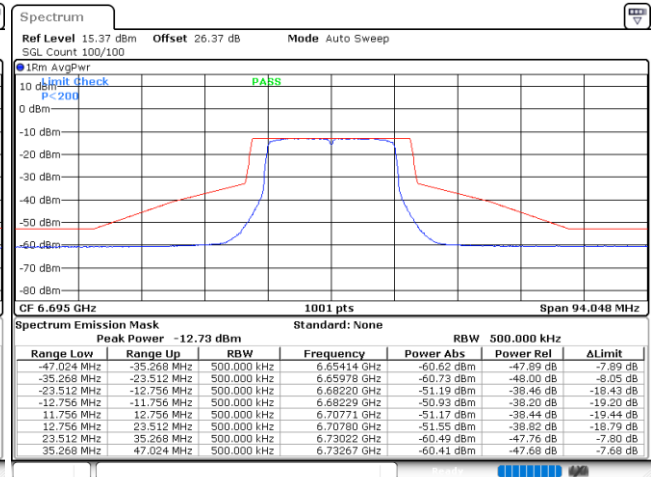

Date: 25.NOV.2025 15:01:42




Plot on 6855 MHz

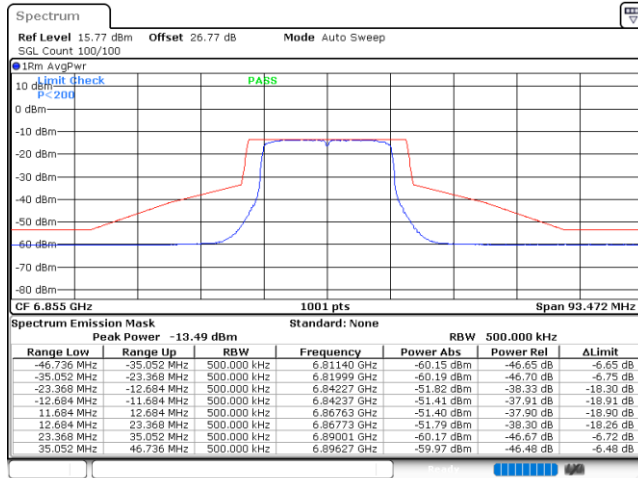


Date: 25.NOV.2025 15:07:45

Plot on 6875 MHz

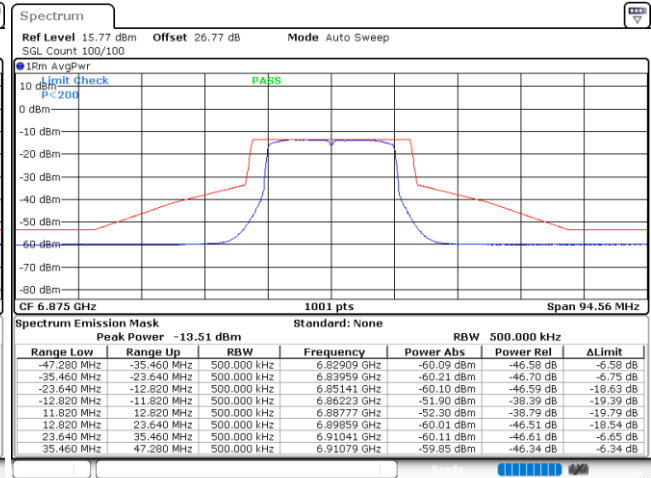


Date: 25.NOV.2025 15:12:53

Plot on 6895 MHz

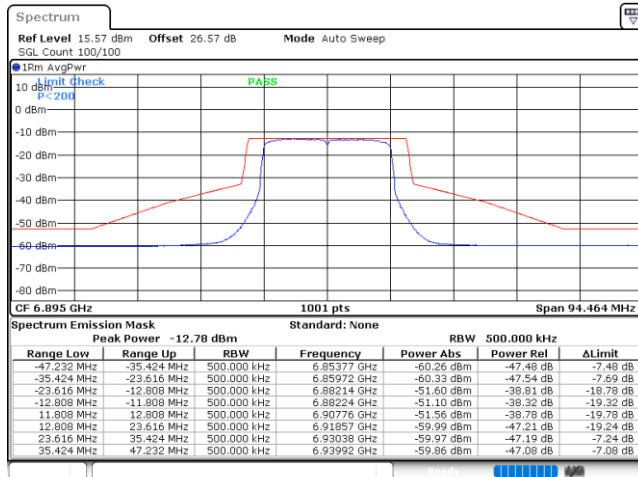

Date: 25.NOV.2025 15:33:17

Plot on 6995 MHz

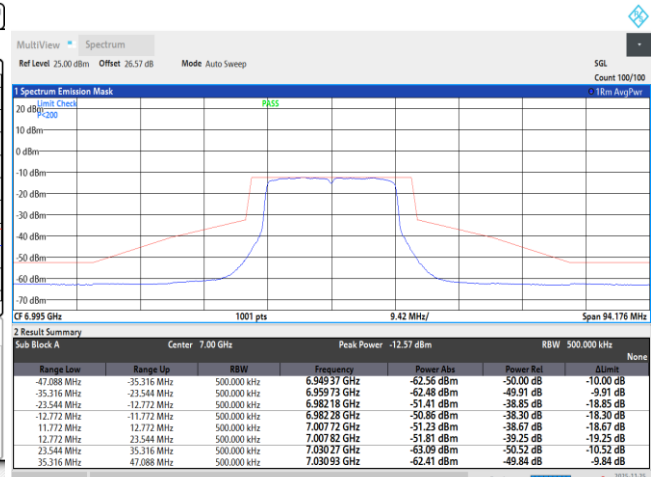

03:58:07 PM 11/25/2025