



Appendix C

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: BE7200 Dual-Band Wi-Fi 7 Router with 2.5G Ports

Test Model: BE12 Pro

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	53.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Can Kun





C.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant1	18.49
NVNT	a	5280	Ant1	18.37
NVNT	a	5320	Ant1	21.56
NVNT	n20	5260	Ant1	19.05
NVNT	n20	5280	Ant1	19.03
NVNT	n20	5320	Ant1	21.26
NVNT	n40	5270	Ant1	38.61
NVNT	n40	5310	Ant1	38.67
NVNT	ac20	5260	Ant1	19.1
NVNT	ac20	5280	Ant1	19.04
NVNT	ac20	5320	Ant1	21.31
NVNT	ac40	5270	Ant1	38.67
NVNT	ac40	5310	Ant1	38.8
NVNT	ac80	5290	Ant1	87.19
NVNT	ax20	5260	Ant1	20.03
NVNT	ax20	5280	Ant1	19.89
NVNT	ax20	5320	Ant1	20.03
NVNT	ax40	5270	Ant1	39.58
NVNT	ax40	5310	Ant1	39.58
NVNT	ax80	5290	Ant1	80.75
NVNT	be20	5260	Ant1	19.93
NVNT	be20	5280	Ant1	19.93
NVNT	be20	5320	Ant1	19.93
NVNT	be40	5270	Ant1	39.62
NVNT	be40	5310	Ant1	39.64
NVNT	be80	5290	Ant1	87.1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

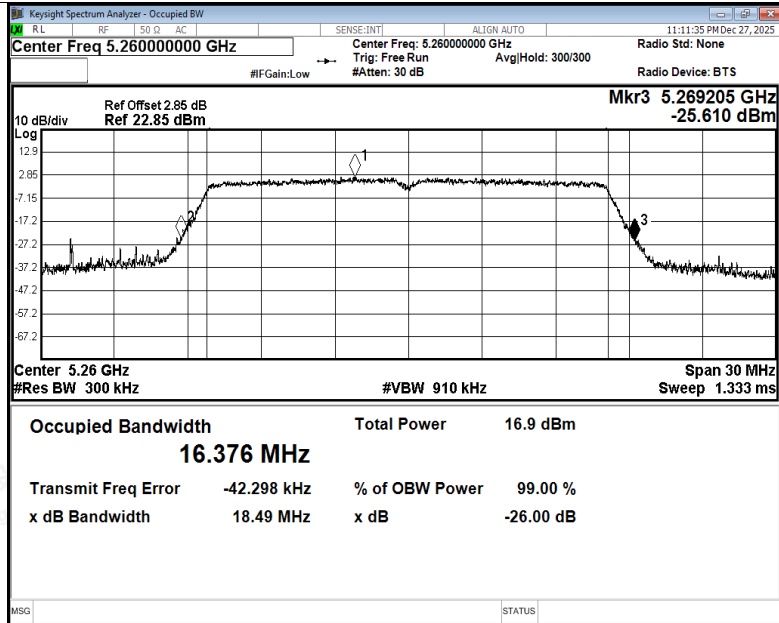

-26dB Bandwidth NVNT a 5260MHz Ant1

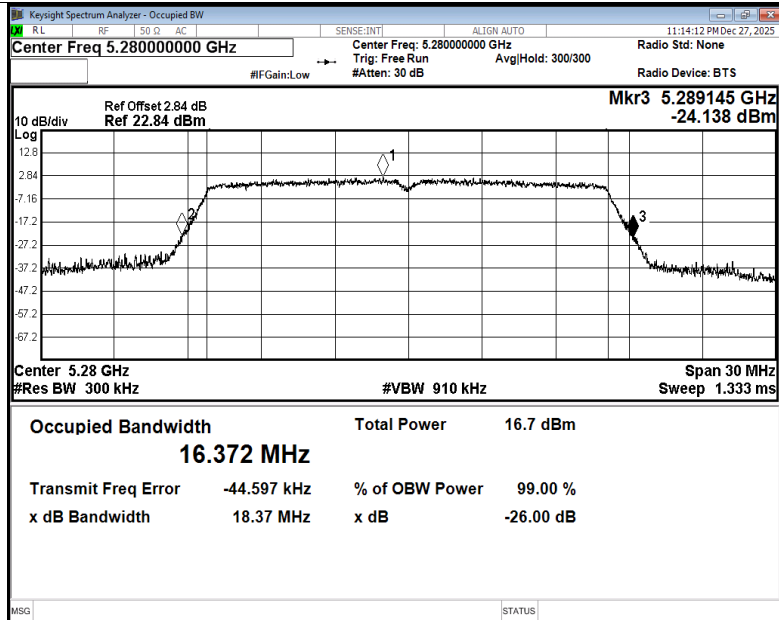

-26dB Bandwidth NVNT a 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

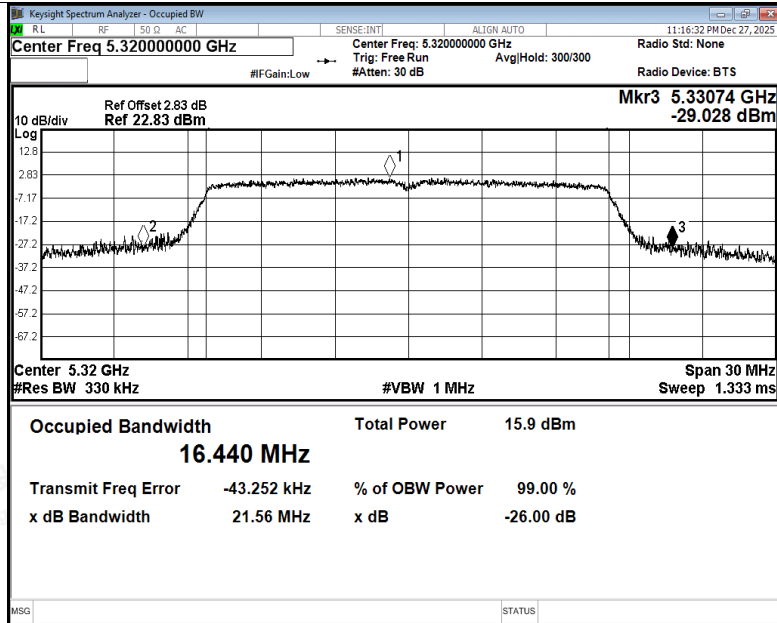

-26dB Bandwidth NVNT a 5320MHz Ant1

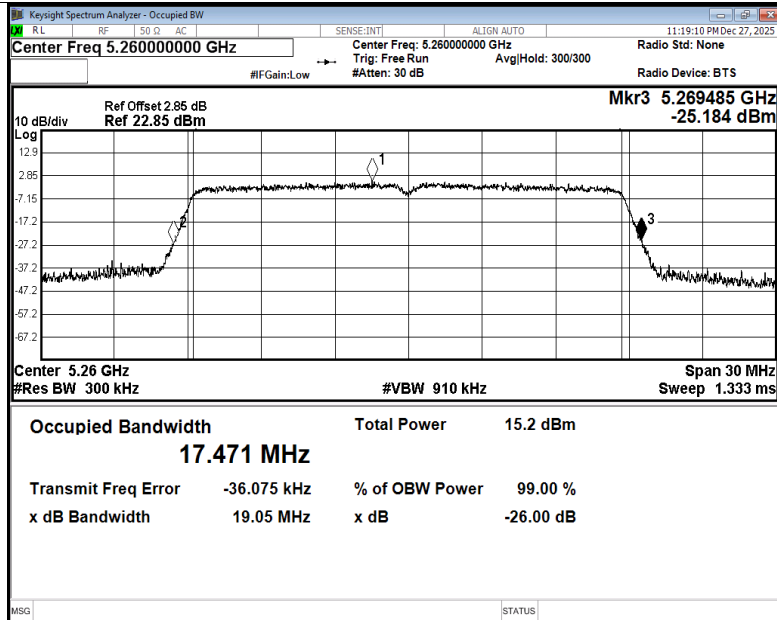

-26dB Bandwidth NVNT n20 5260MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

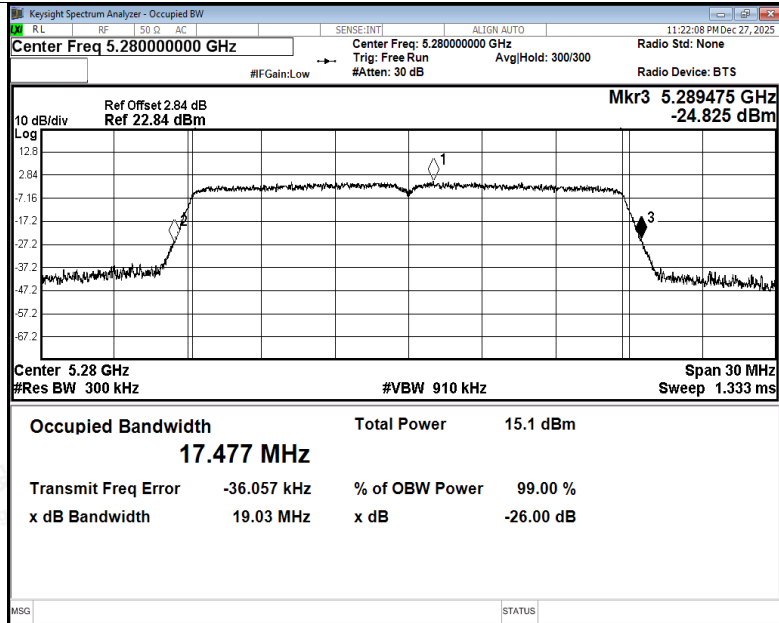

-26dB Bandwidth NVNT n20 5280MHz Ant1

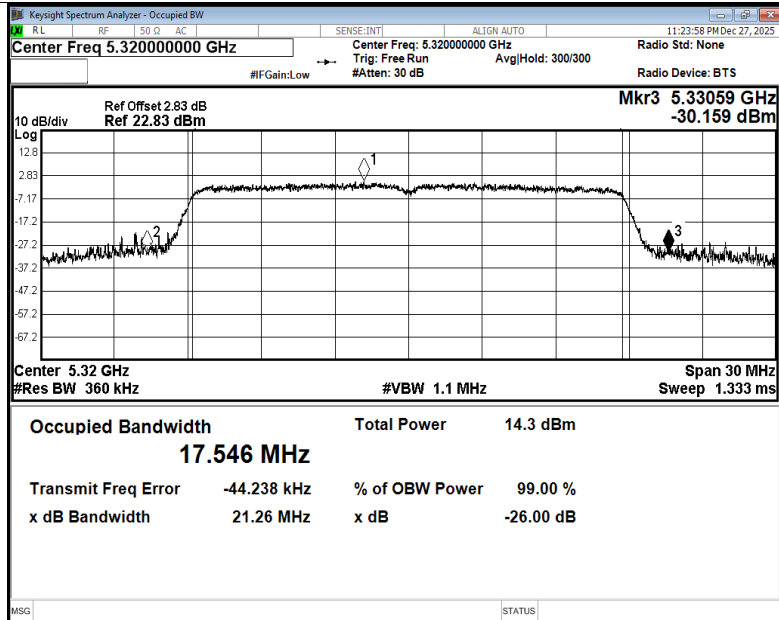

-26dB Bandwidth NVNT n20 5320MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

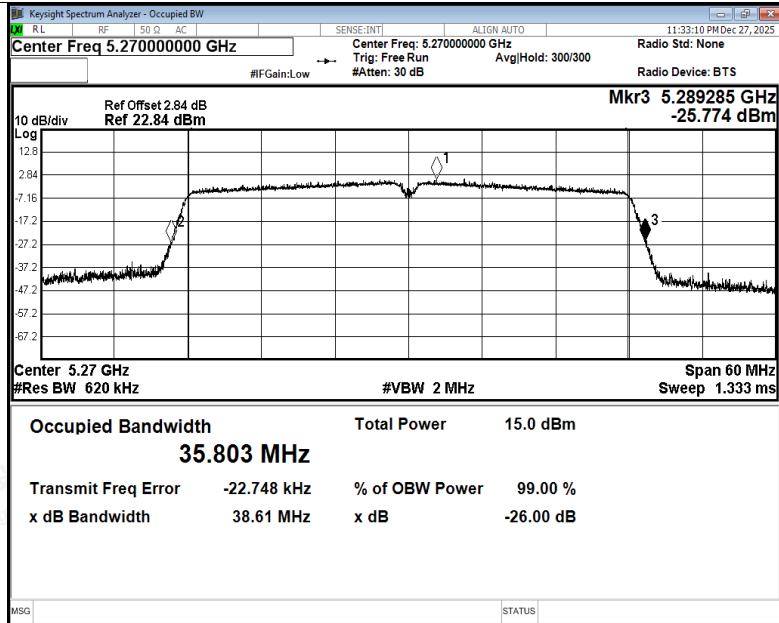

-26dB Bandwidth NVNT n40 5270MHz Ant1

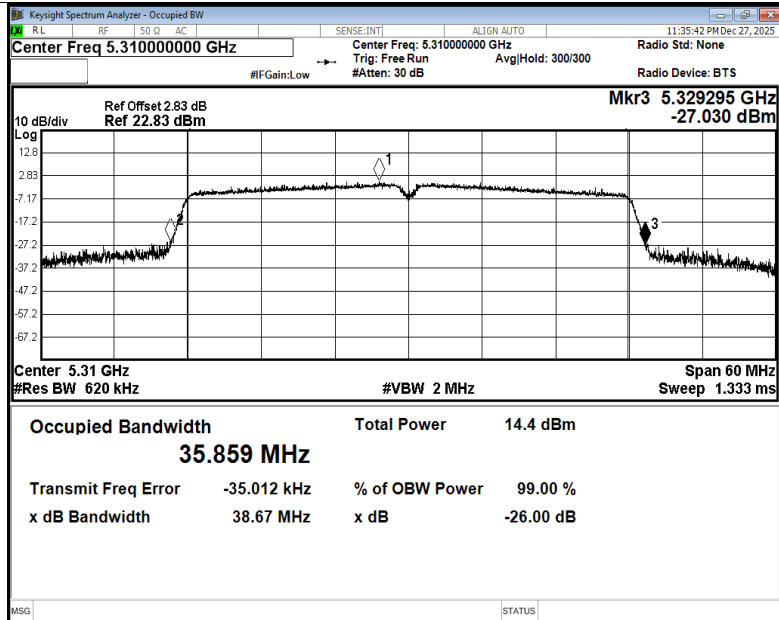

-26dB Bandwidth NVNT n40 5310MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

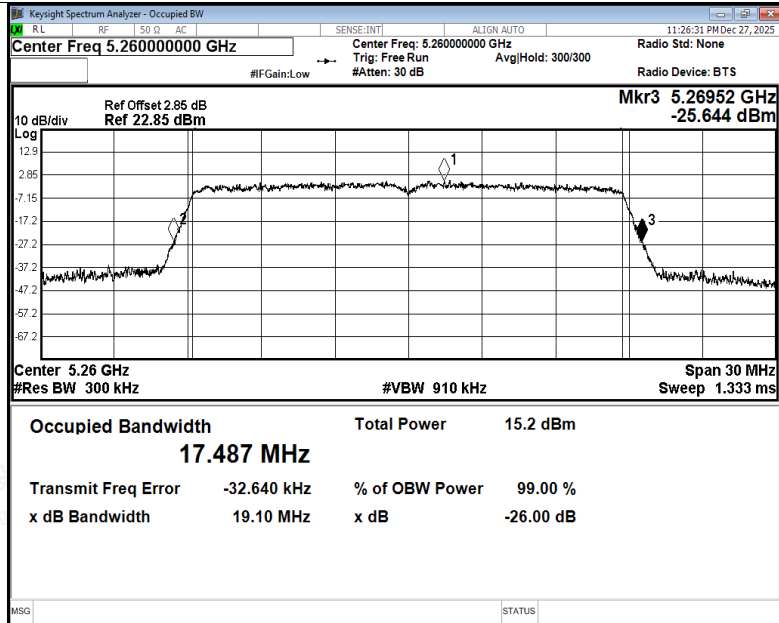

-26dB Bandwidth NVNT ac20 5260MHz Ant1

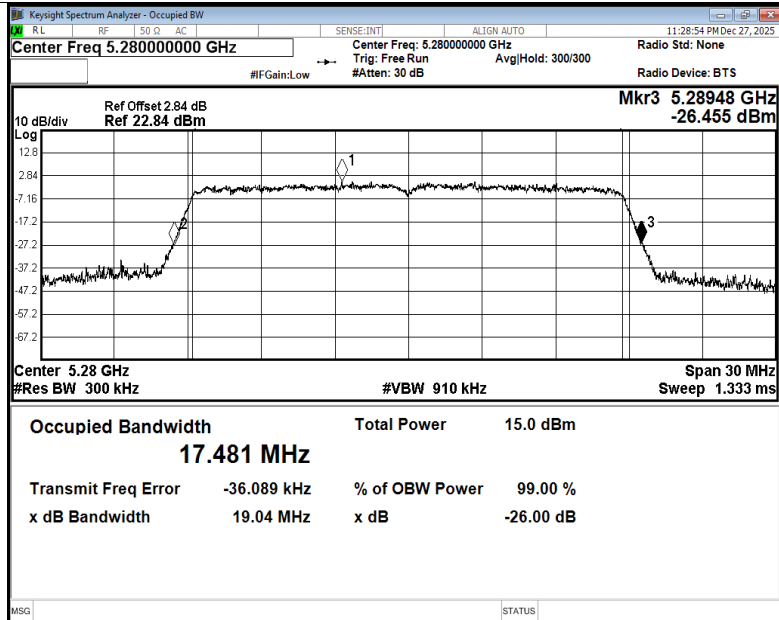

-26dB Bandwidth NVNT ac20 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

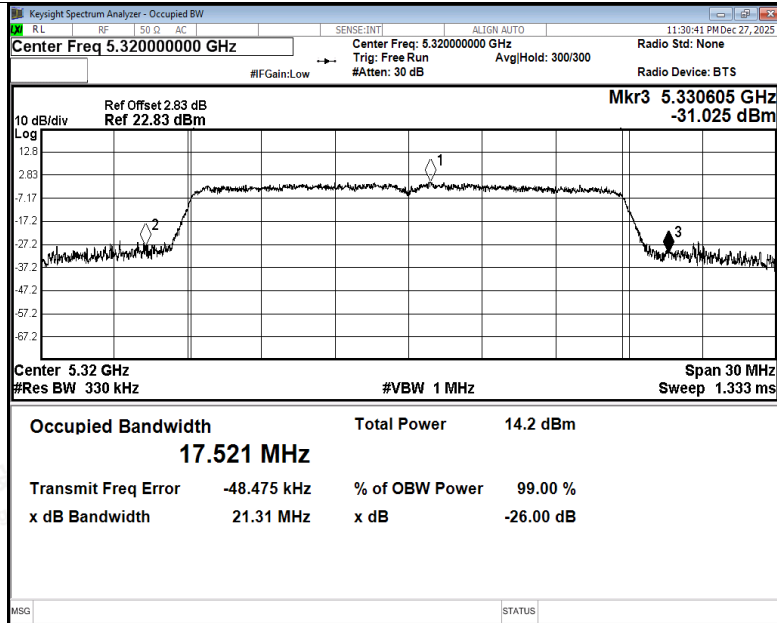

-26dB Bandwidth NVNT ac20 5320MHz Ant1

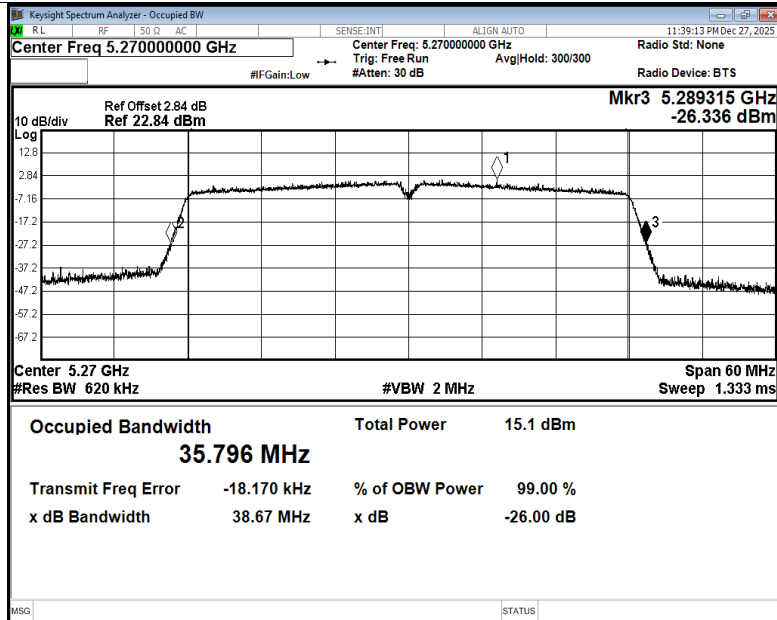

-26dB Bandwidth NVNT ac40 5270MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

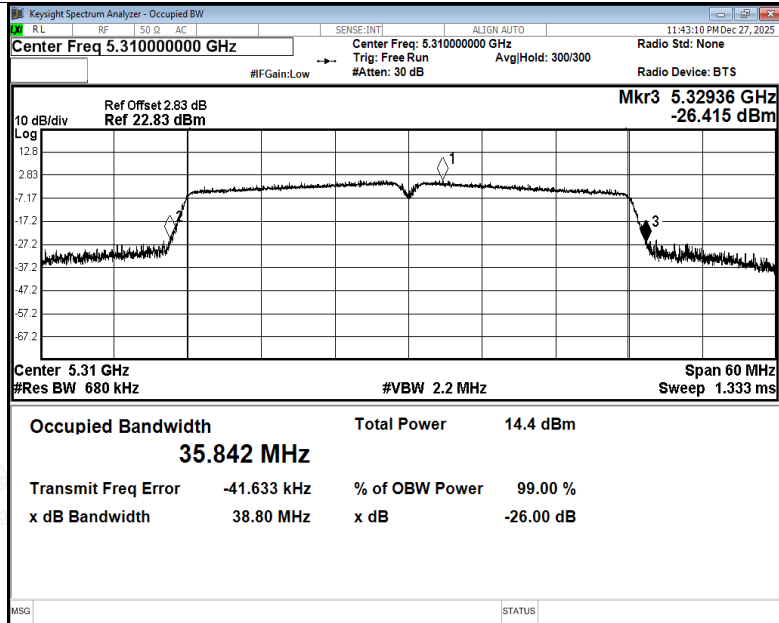

-26dB Bandwidth NVNT ac40 5310MHz Ant1

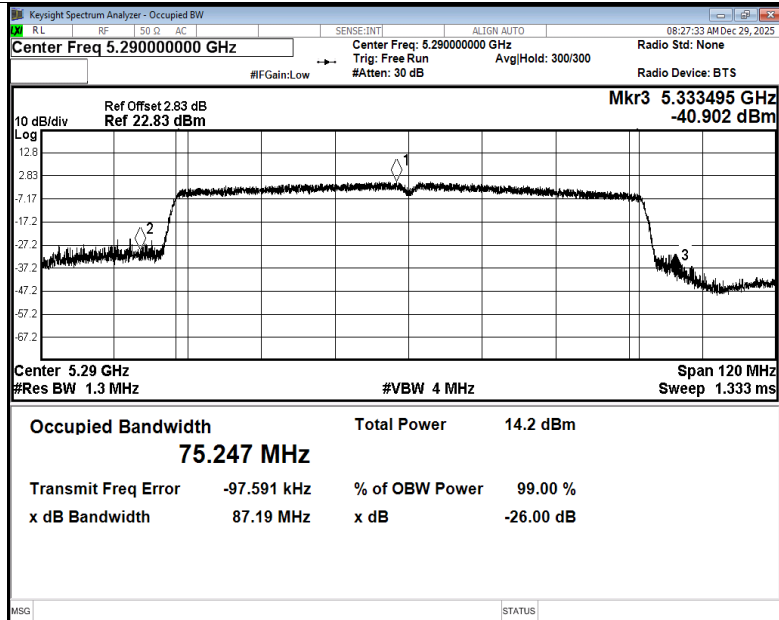

-26dB Bandwidth NVNT ac80 5290MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

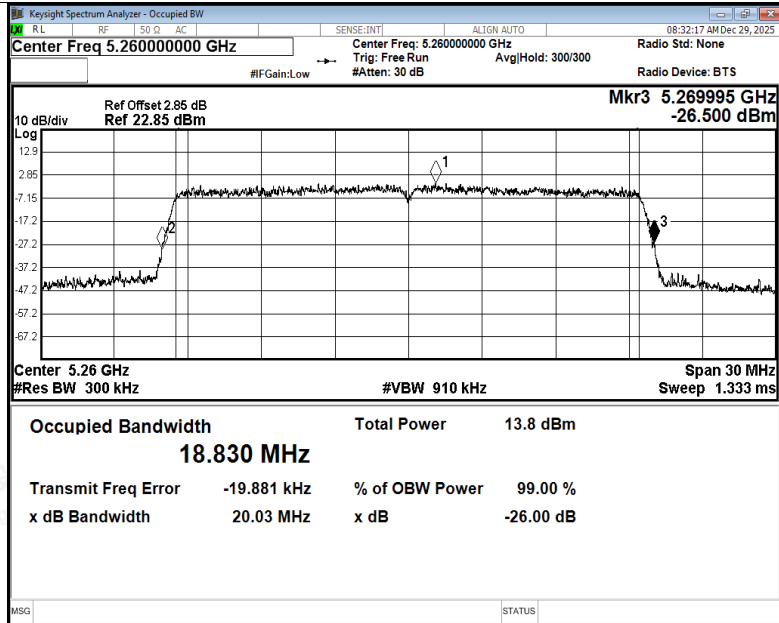

-26dB Bandwidth NVNT ax20 5260MHz Ant1

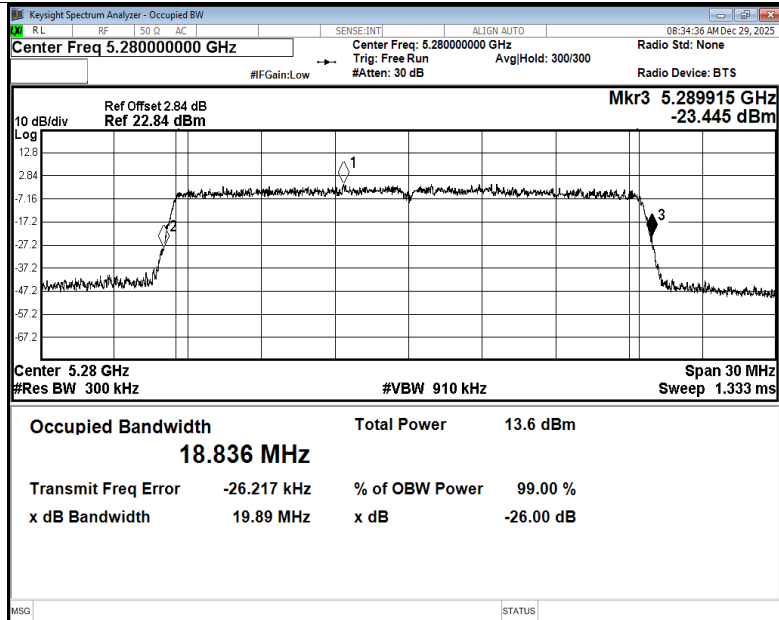

-26dB Bandwidth NVNT ax20 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

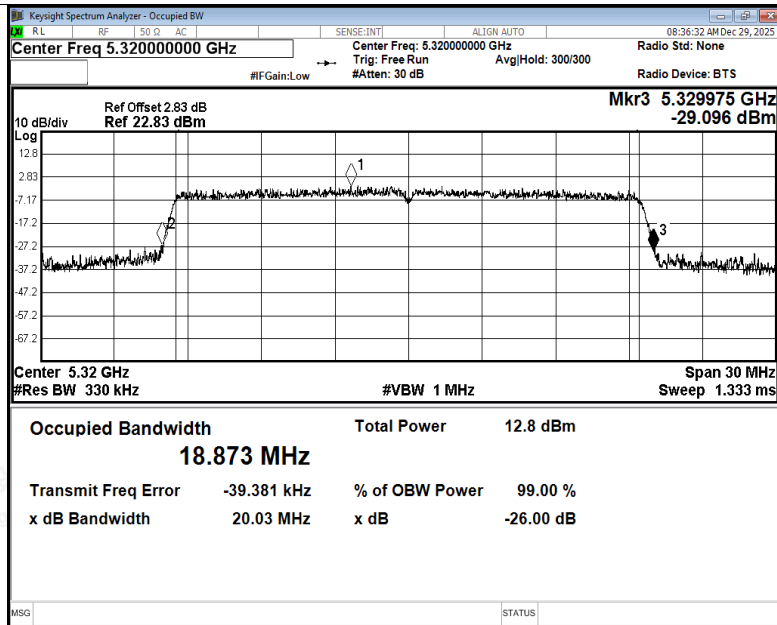

-26dB Bandwidth NVNT ax20 5320MHz Ant1

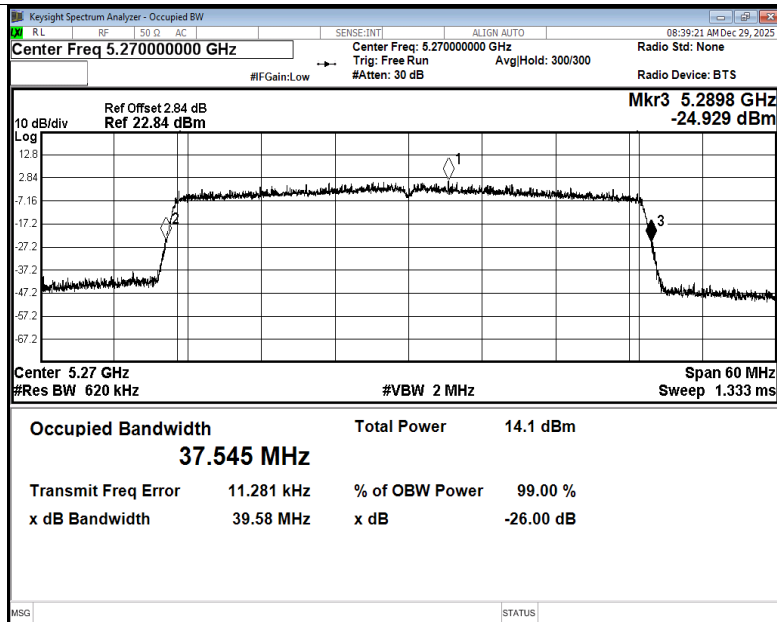

-26dB Bandwidth NVNT ax40 5270MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

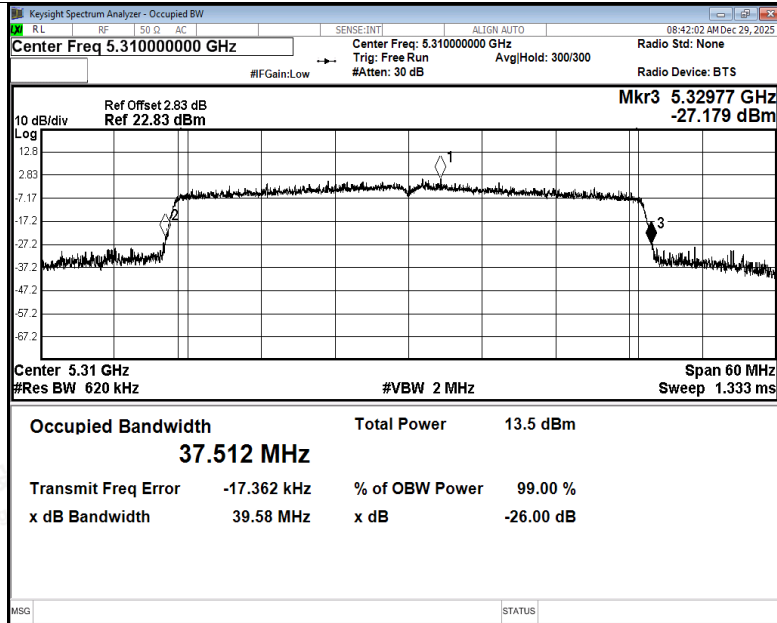

-26dB Bandwidth NVNT ax40 5310MHz Ant1

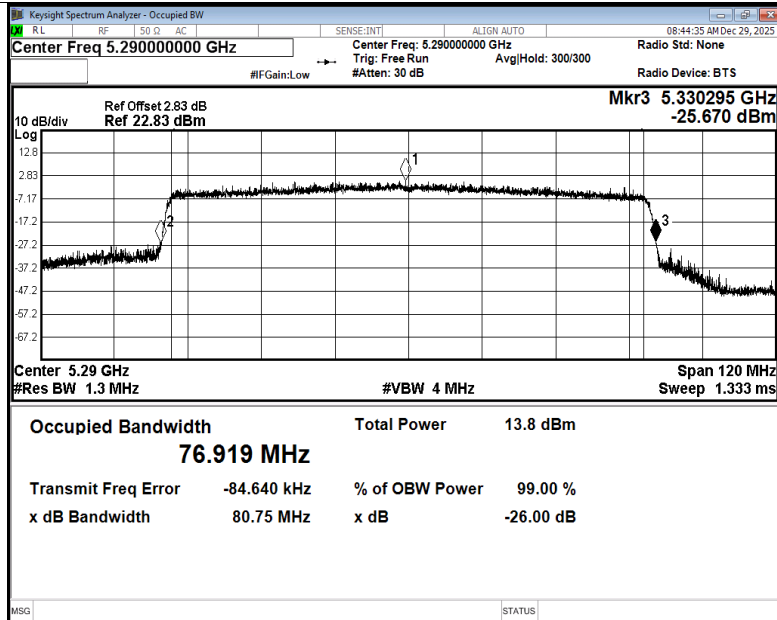

-26dB Bandwidth NVNT ax80 5290MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

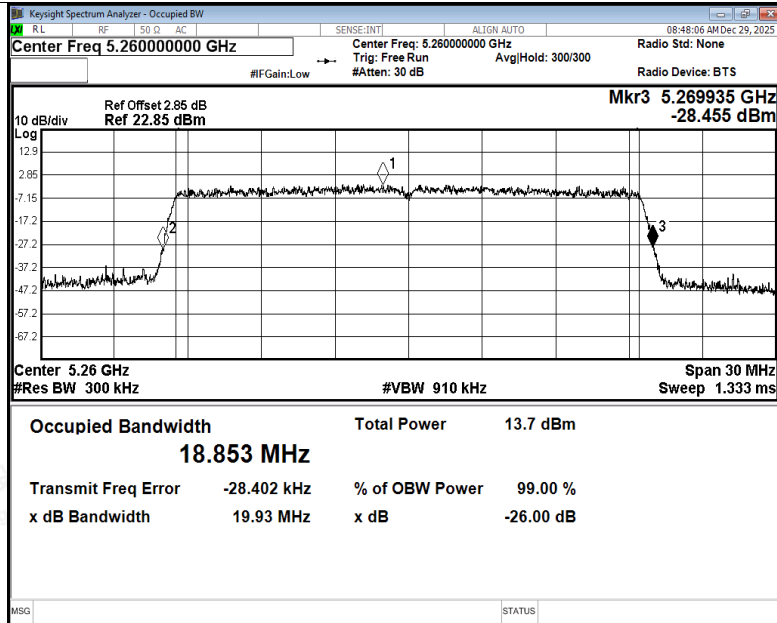

-26dB Bandwidth NVNT be20 5260MHz Ant1

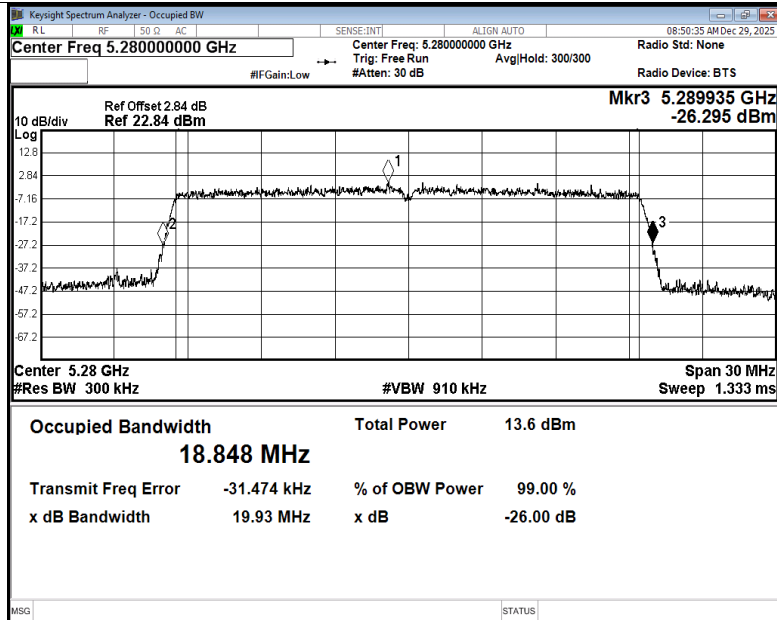

-26dB Bandwidth NVNT be20 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

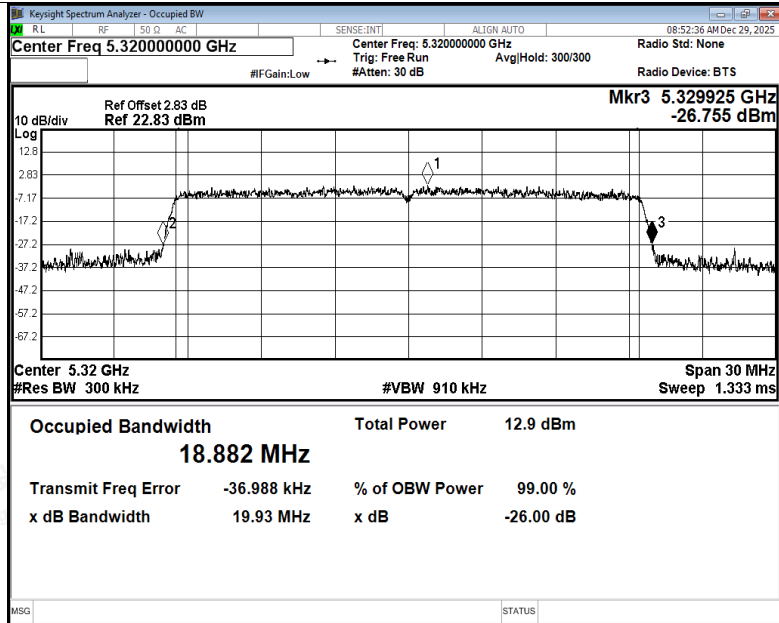

-26dB Bandwidth NVNT be20 5320MHz Ant1

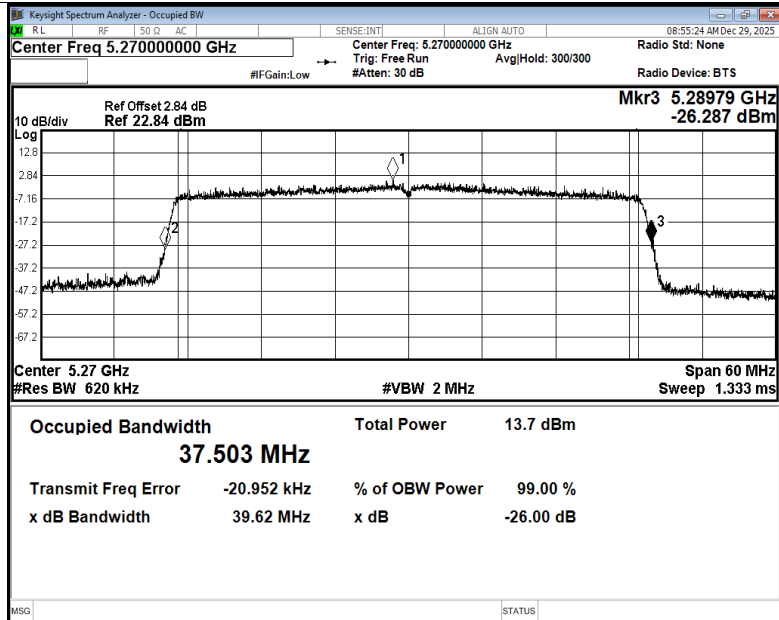

-26dB Bandwidth NVNT be40 5270MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

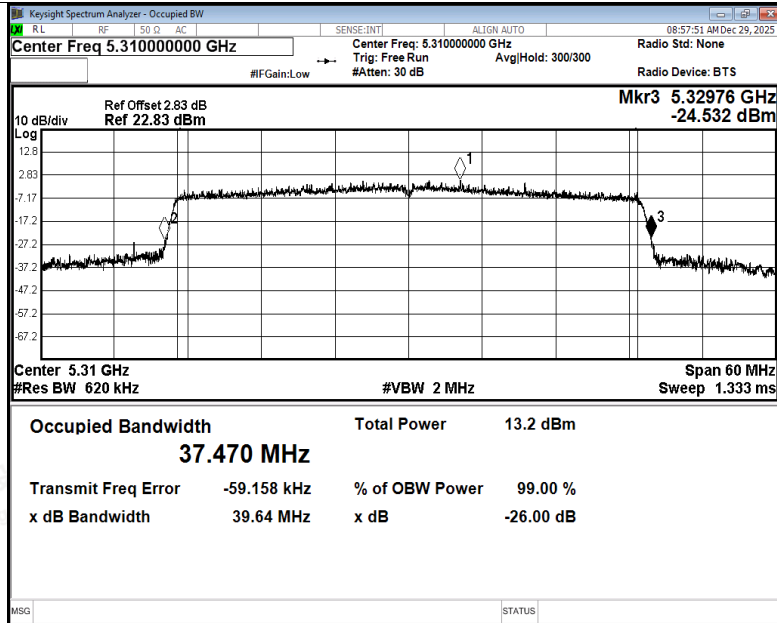

-26dB Bandwidth NVNT be40 5310MHz Ant1

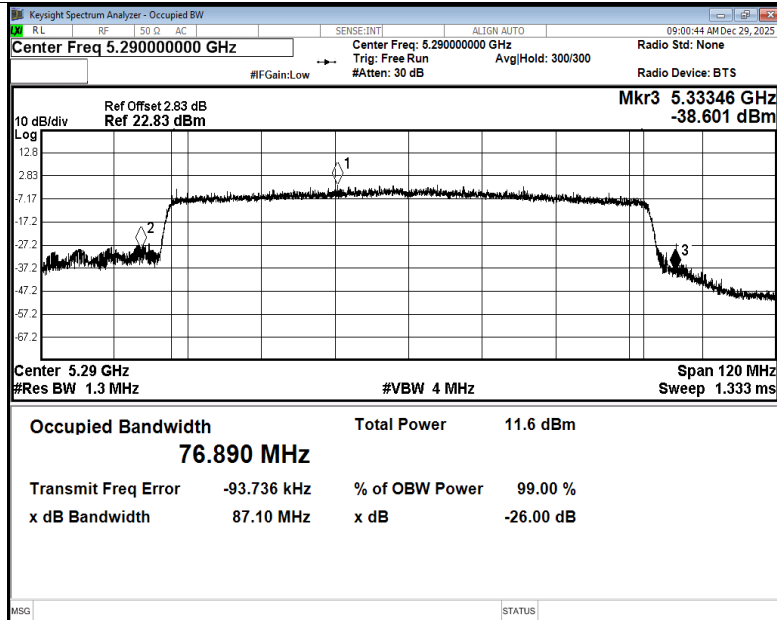

-26dB Bandwidth NVNT be80 5290MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant2	18.48
NVNT	a	5280	Ant2	18.46
NVNT	a	5320	Ant2	21.53
NVNT	n20	5260	Ant2	19.05
NVNT	n20	5280	Ant2	19.09
NVNT	n20	5320	Ant2	21.99
NVNT	n40	5270	Ant2	38.6
NVNT	n40	5310	Ant2	38.88
NVNT	ac20	5260	Ant2	19.05
NVNT	ac20	5280	Ant2	18.98
NVNT	ac20	5320	Ant2	25.49
NVNT	ac40	5270	Ant2	38.36
NVNT	ac40	5310	Ant2	38.34
NVNT	ac80	5290	Ant2	94.48
NVNT	ax20	5260	Ant2	19.88
NVNT	ax20	5280	Ant2	19.95
NVNT	ax20	5320	Ant2	20.32
NVNT	ax40	5270	Ant2	39.63
NVNT	ax40	5310	Ant2	39.68
NVNT	ax80	5290	Ant2	90.63
NVNT	be20	5260	Ant2	19.95
NVNT	be20	5280	Ant2	19.99
NVNT	be20	5320	Ant2	20.11
NVNT	be40	5270	Ant2	39.59
NVNT	be40	5310	Ant2	39.7
NVNT	be80	5290	Ant2	84.24




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

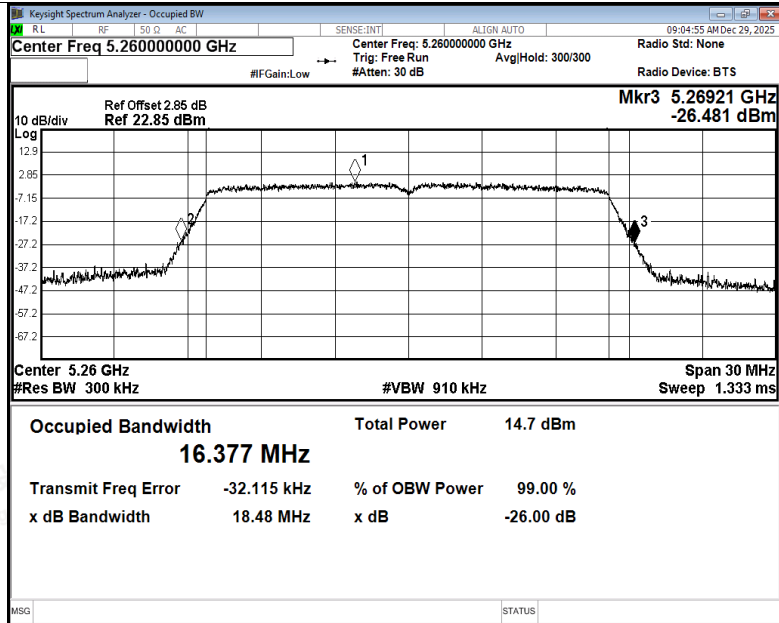

-26dB Bandwidth NVNT a 5260MHz Ant2

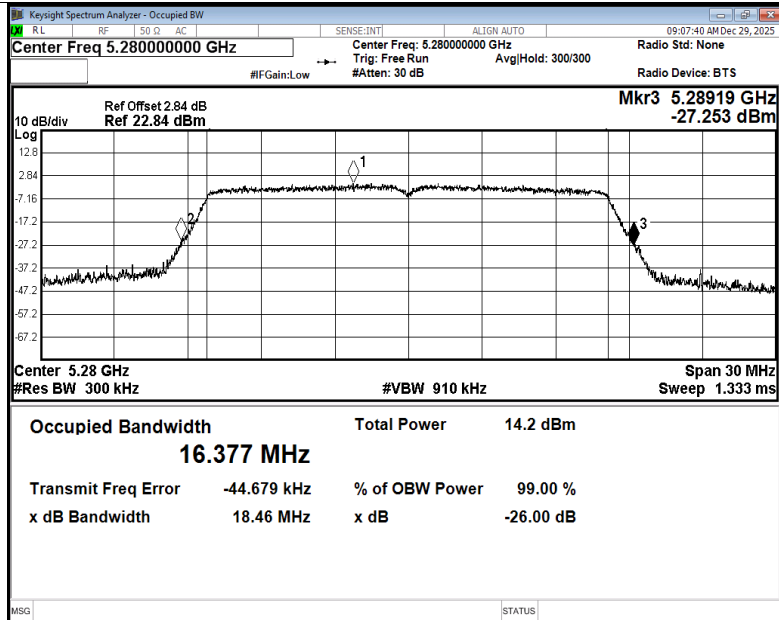

-26dB Bandwidth NVNT a 5280MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

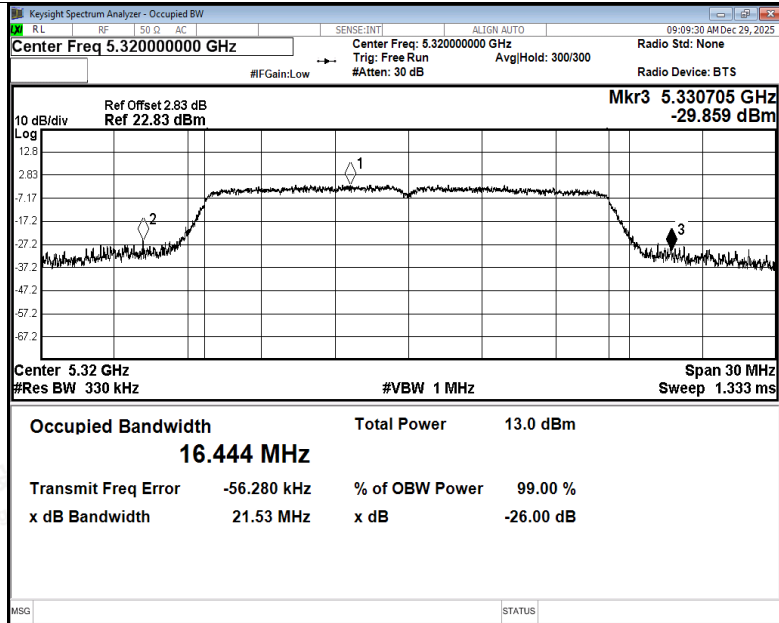

-26dB Bandwidth NVNT a 5320MHz Ant2

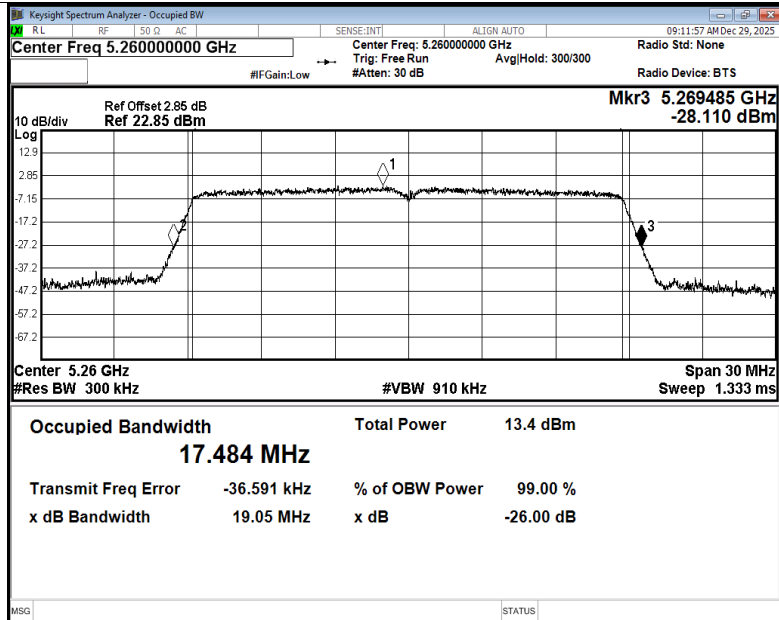

-26dB Bandwidth NVNT n20 5260MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

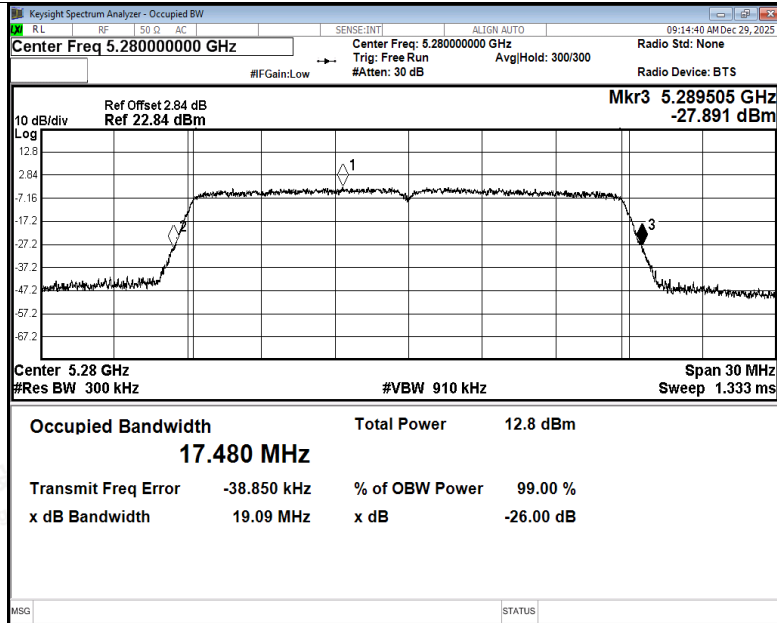

-26dB Bandwidth NVNT n20 5280MHz Ant2

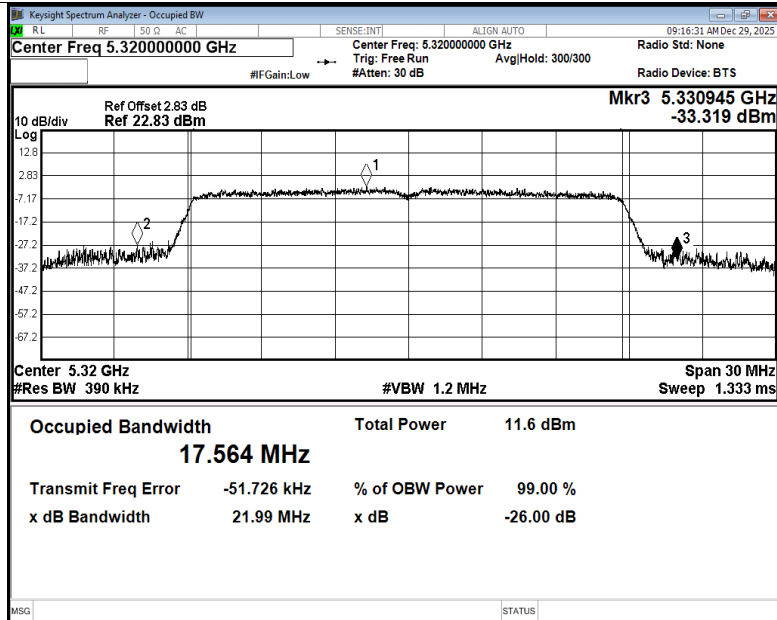

-26dB Bandwidth NVNT n20 5320MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

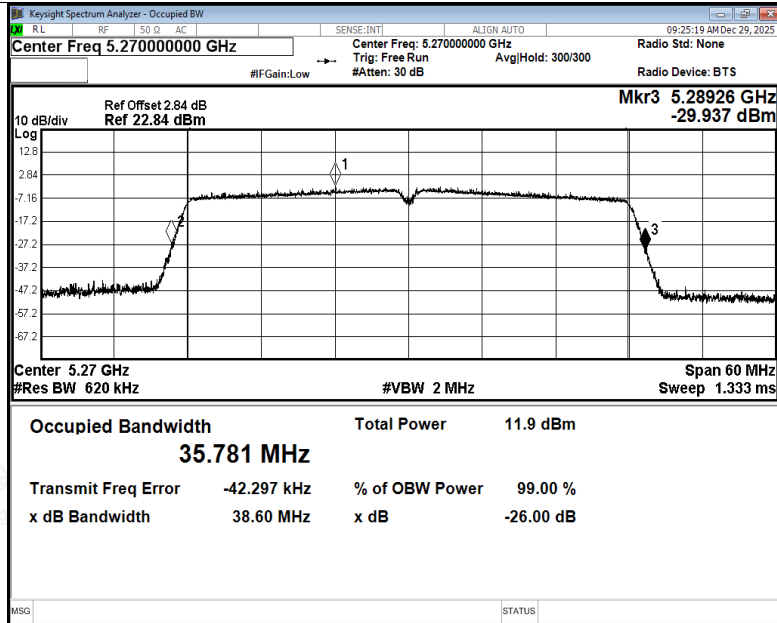

-26dB Bandwidth NVNT n40 5270MHz Ant2

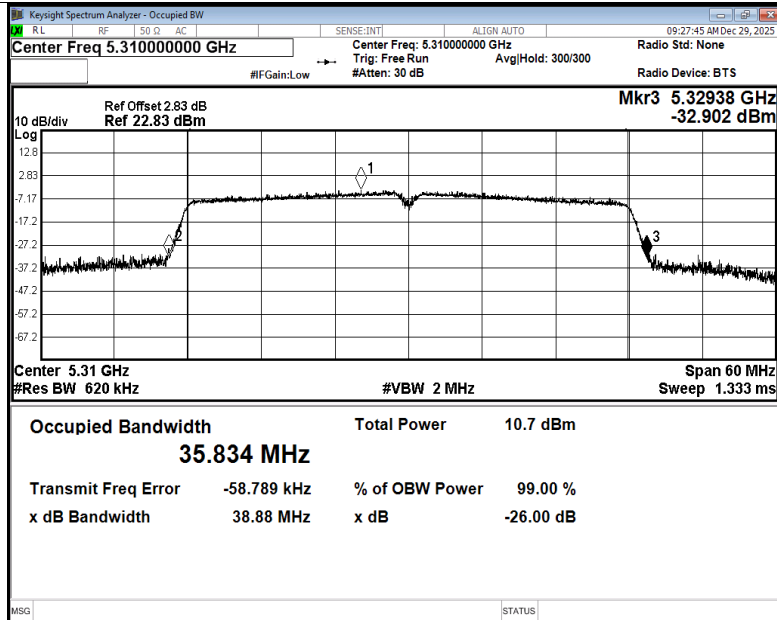

-26dB Bandwidth NVNT n40 5310MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

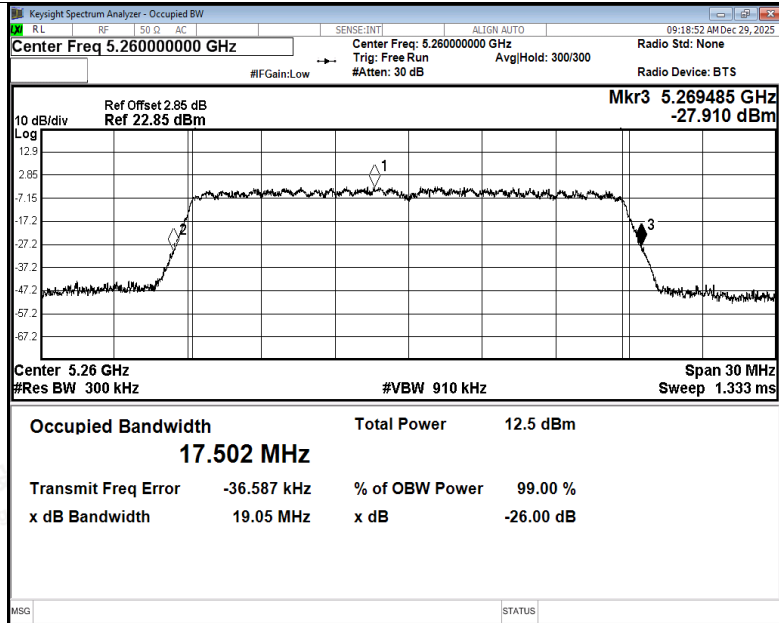

-26dB Bandwidth NVNT ac20 5260MHz Ant2

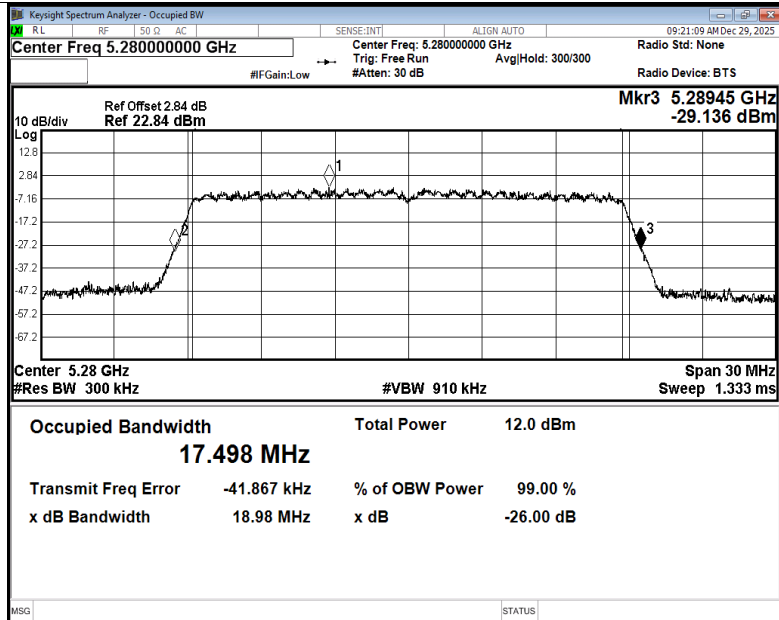

-26dB Bandwidth NVNT ac20 5280MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

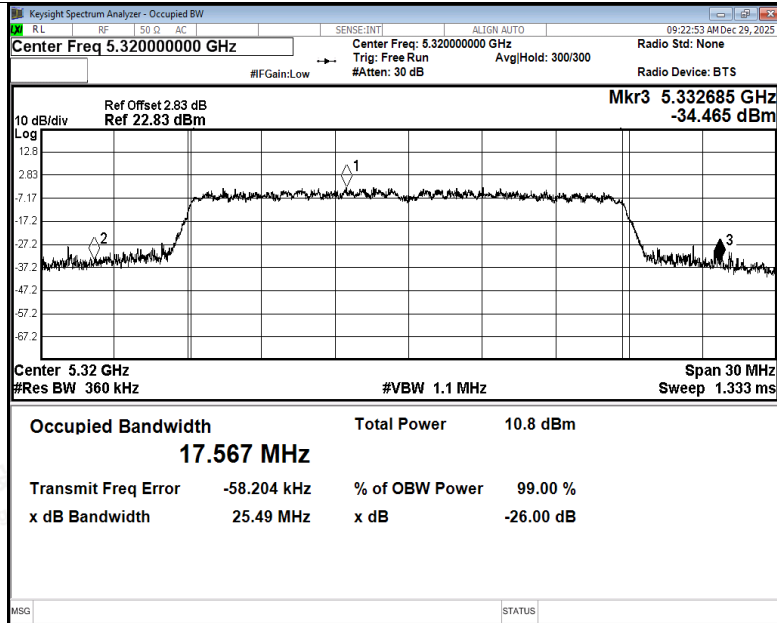

-26dB Bandwidth NVNT ac20 5320MHz Ant2

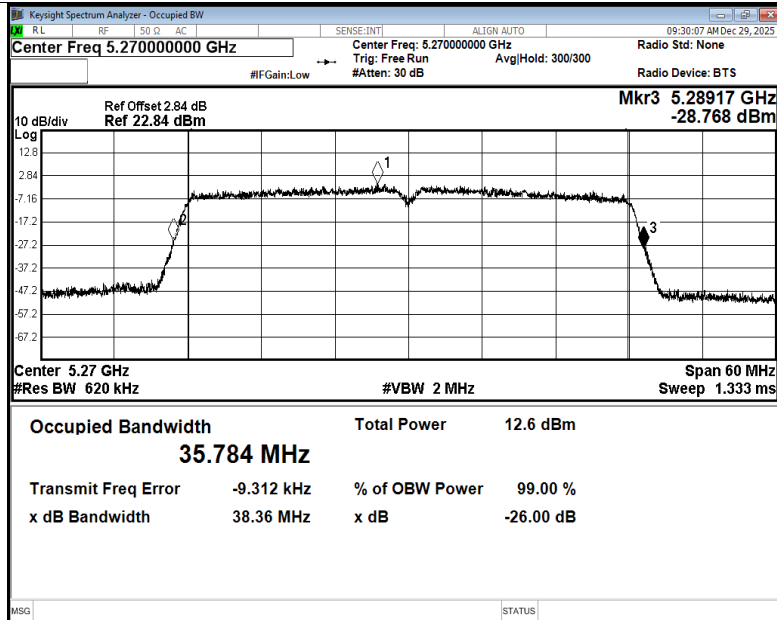

-26dB Bandwidth NVNT ac40 5270MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

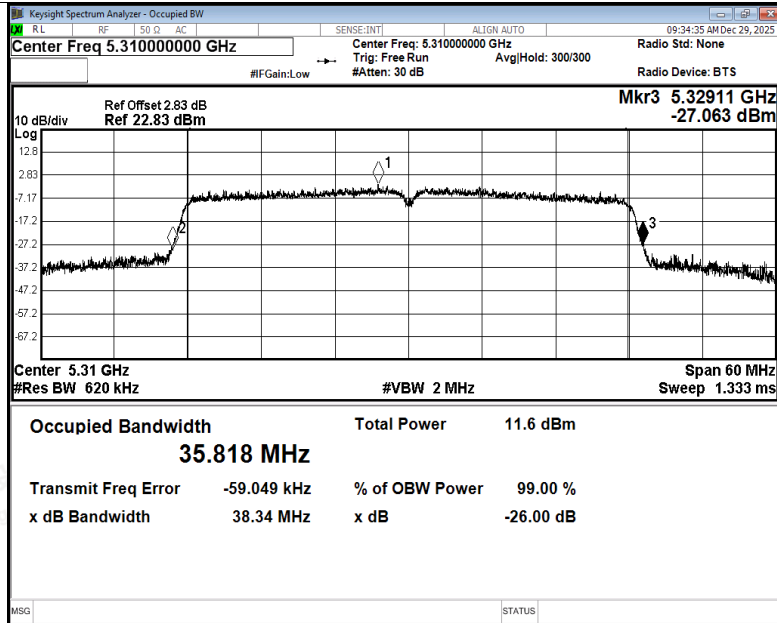

-26dB Bandwidth NVNT ac40 5310MHz Ant2

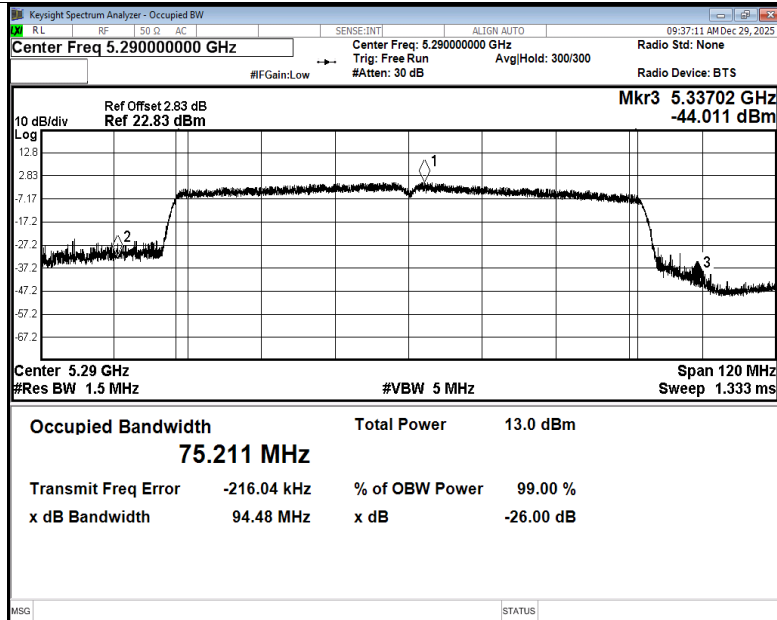

-26dB Bandwidth NVNT ac80 5290MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

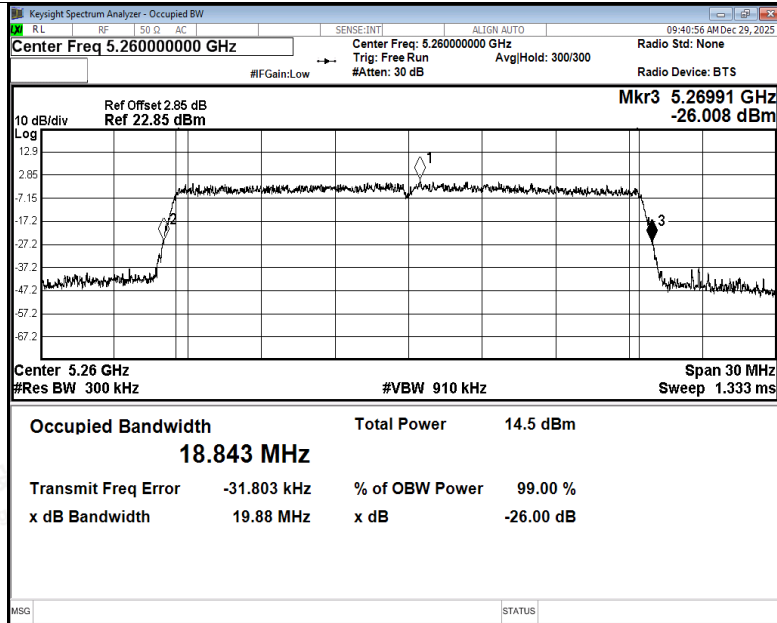

-26dB Bandwidth NVNT ax20 5260MHz Ant2

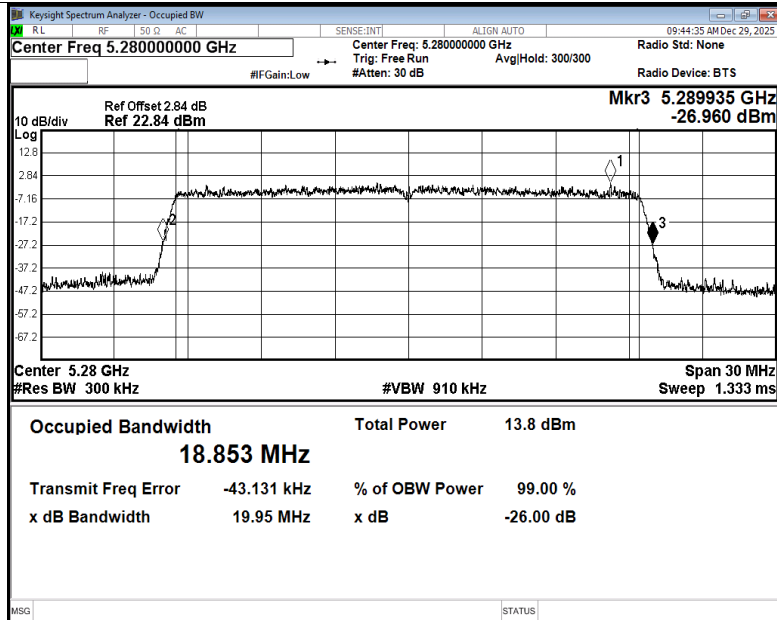

-26dB Bandwidth NVNT ax20 5280MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

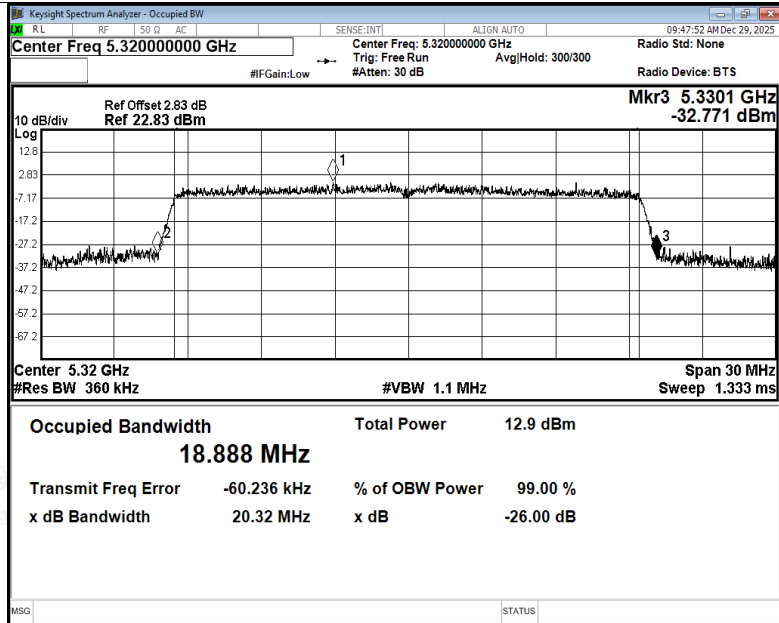

-26dB Bandwidth NVNT ax20 5320MHz Ant2

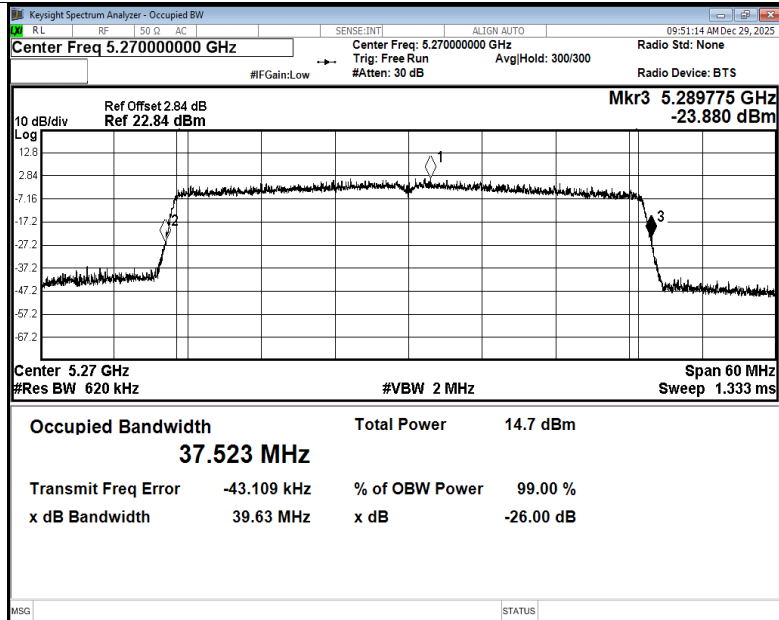

-26dB Bandwidth NVNT ax40 5270MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

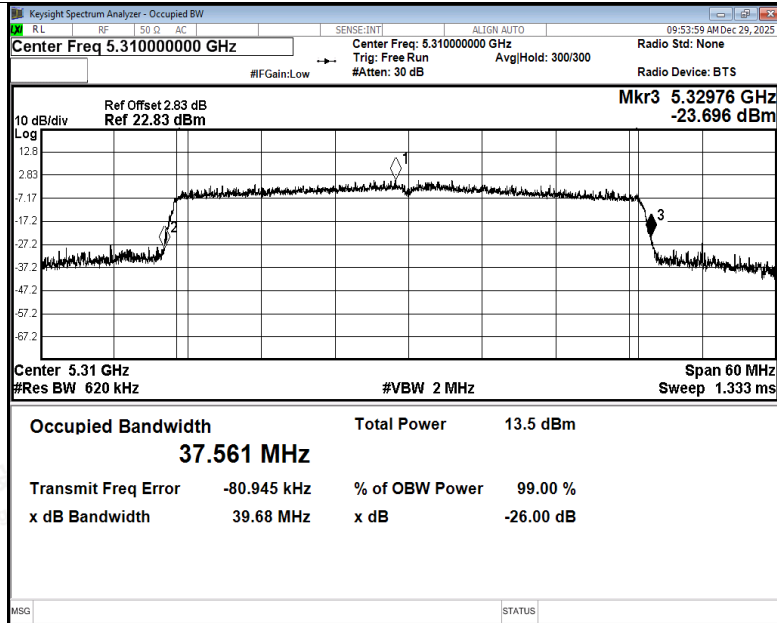

-26dB Bandwidth NVNT ax40 5310MHz Ant2

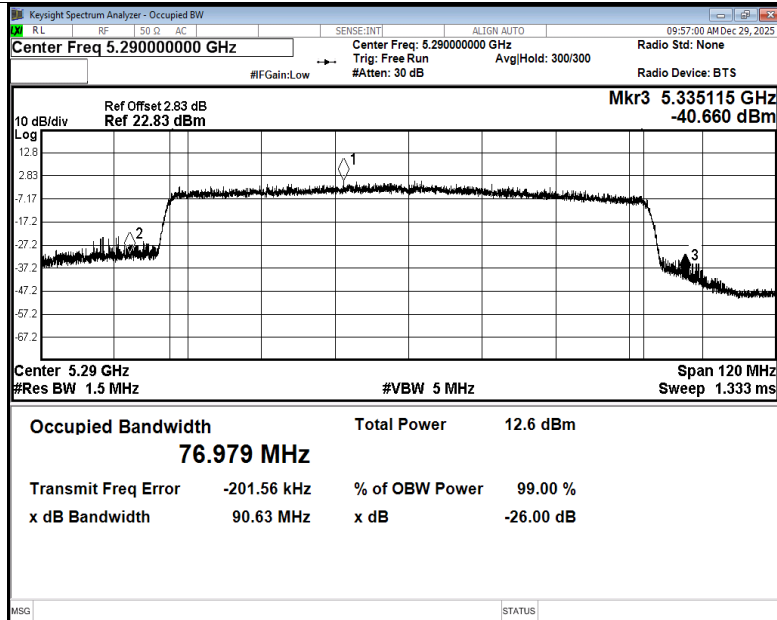

-26dB Bandwidth NVNT ax80 5290MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

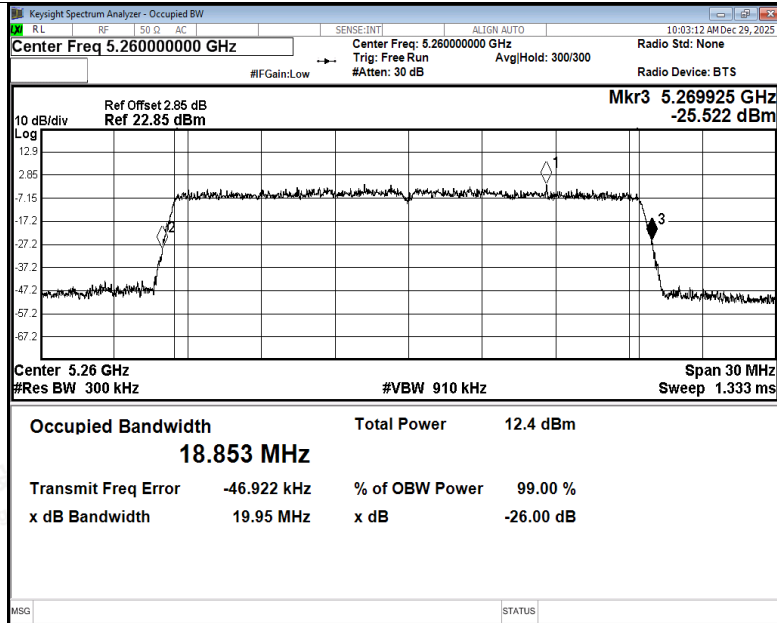

-26dB Bandwidth NVNT be20 5260MHz Ant2

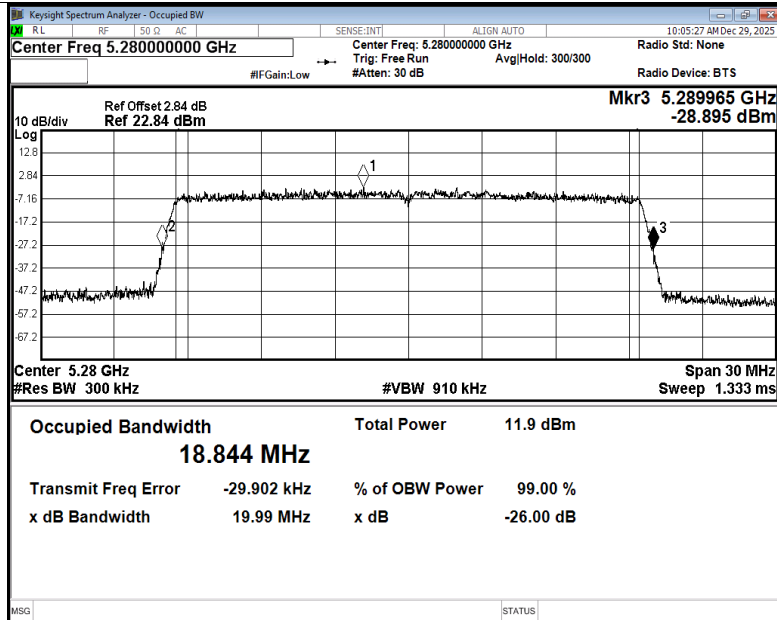

-26dB Bandwidth NVNT be20 5280MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

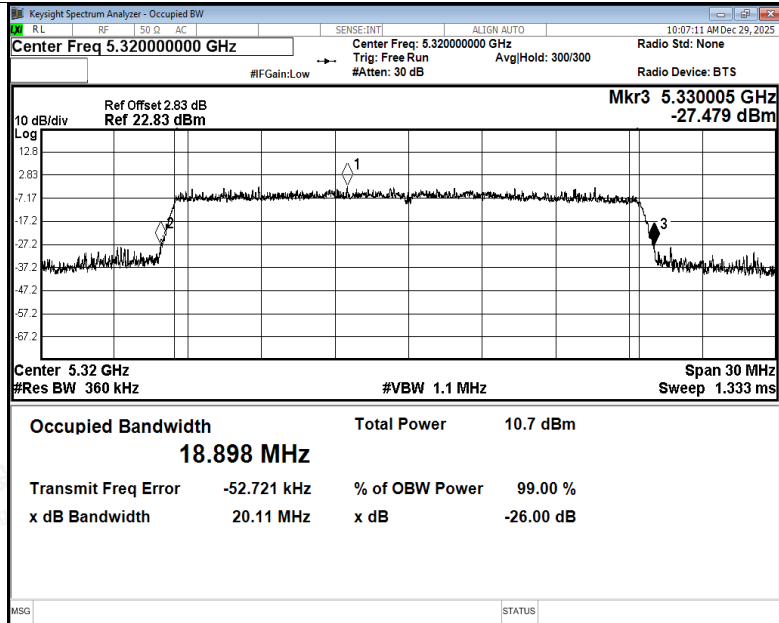

-26dB Bandwidth NVNT be20 5320MHz Ant2

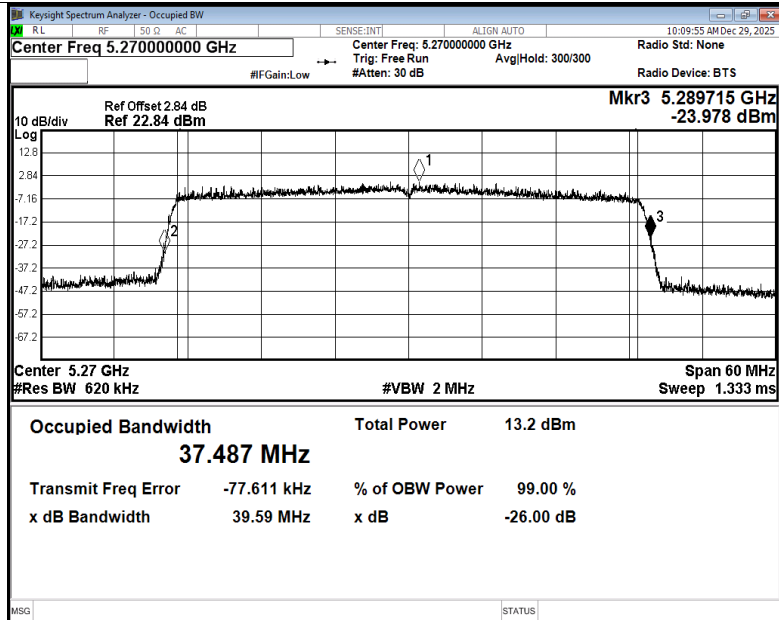

-26dB Bandwidth NVNT be40 5270MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

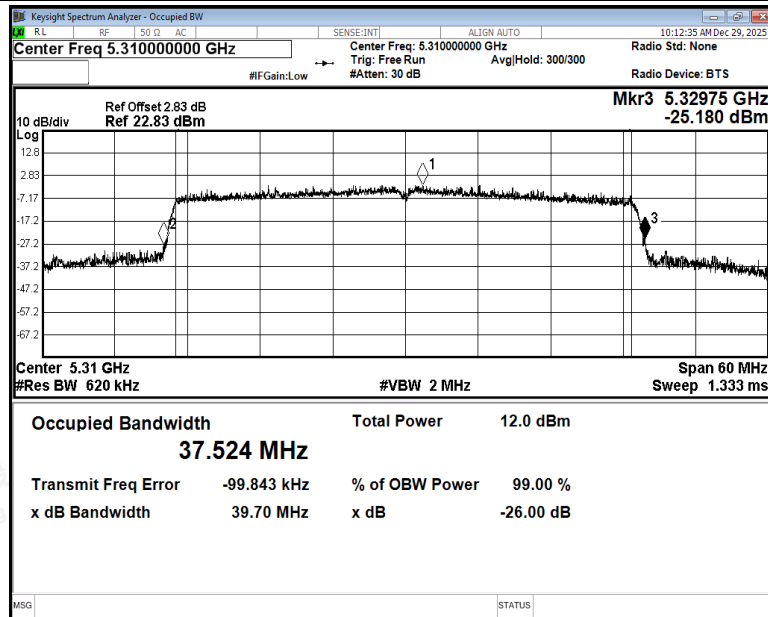

-26dB Bandwidth NVNT be40 5310MHz Ant2

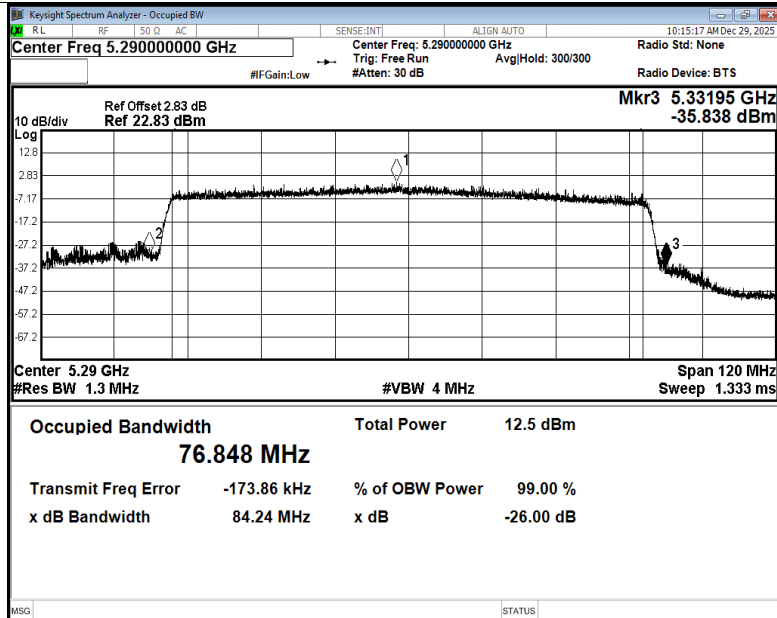

-26dB Bandwidth NVNT be80 5290MHz Ant2



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant3	18.55
NVNT	a	5280	Ant3	18.56
NVNT	a	5320	Ant3	22.12
NVNT	n20	5260	Ant3	19.11
NVNT	n20	5280	Ant3	19.02
NVNT	n20	5320	Ant3	23.39
NVNT	n40	5270	Ant3	38.66
NVNT	n40	5310	Ant3	38.77
NVNT	ac20	5260	Ant3	19.02
NVNT	ac20	5280	Ant3	18.99
NVNT	ac20	5320	Ant3	21.59
NVNT	ac40	5270	Ant3	38.49
NVNT	ac40	5310	Ant3	38.65
NVNT	ac80	5290	Ant3	79.69
NVNT	ax20	5260	Ant3	20
NVNT	ax20	5280	Ant3	19.93
NVNT	ax20	5320	Ant3	20.02
NVNT	ax40	5270	Ant3	39.58
NVNT	ax40	5310	Ant3	39.72
NVNT	ax80	5290	Ant3	80.65
NVNT	be20	5260	Ant3	19.96
NVNT	be20	5280	Ant3	19.96
NVNT	be20	5320	Ant3	20.44
NVNT	be40	5270	Ant3	39.56
NVNT	be40	5310	Ant3	39.74
NVNT	be80	5290	Ant3	82.83




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

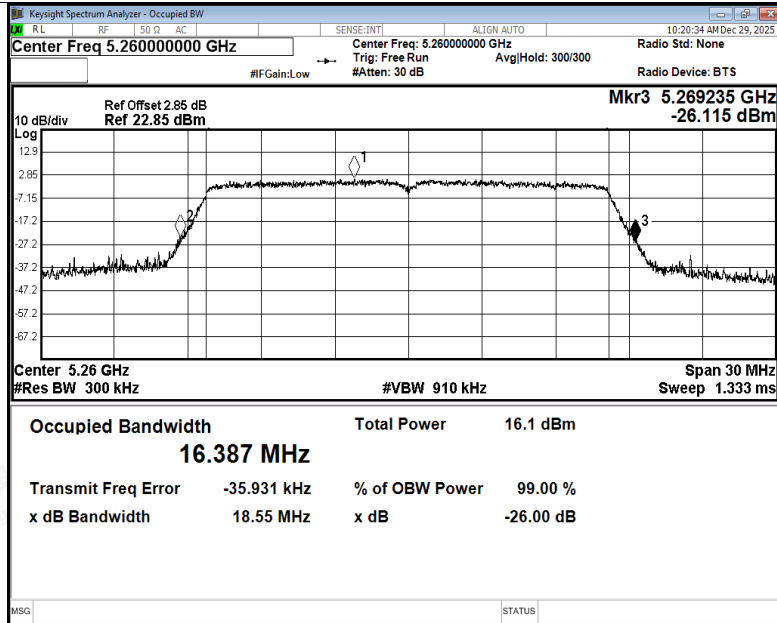

-26dB Bandwidth NVNT a 5260MHz Ant3

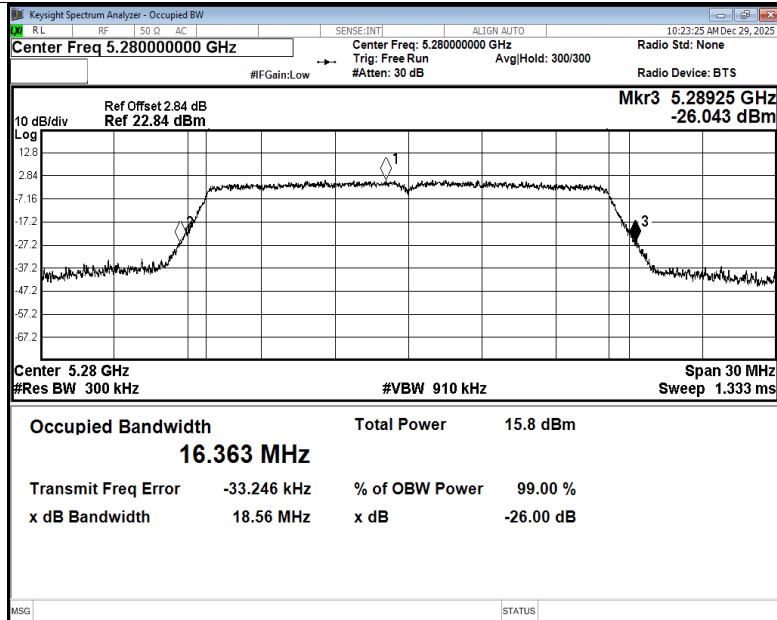

-26dB Bandwidth NVNT a 5280MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

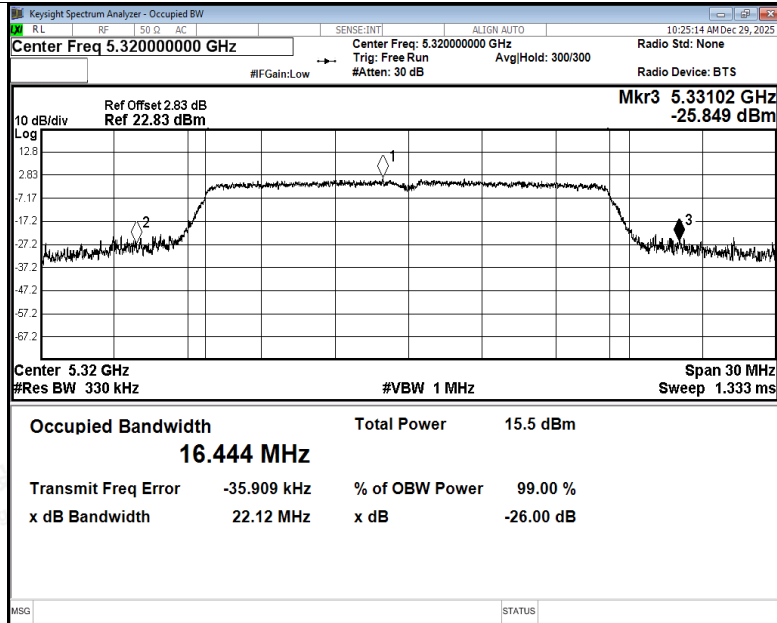

-26dB Bandwidth NVNT a 5320MHz Ant3

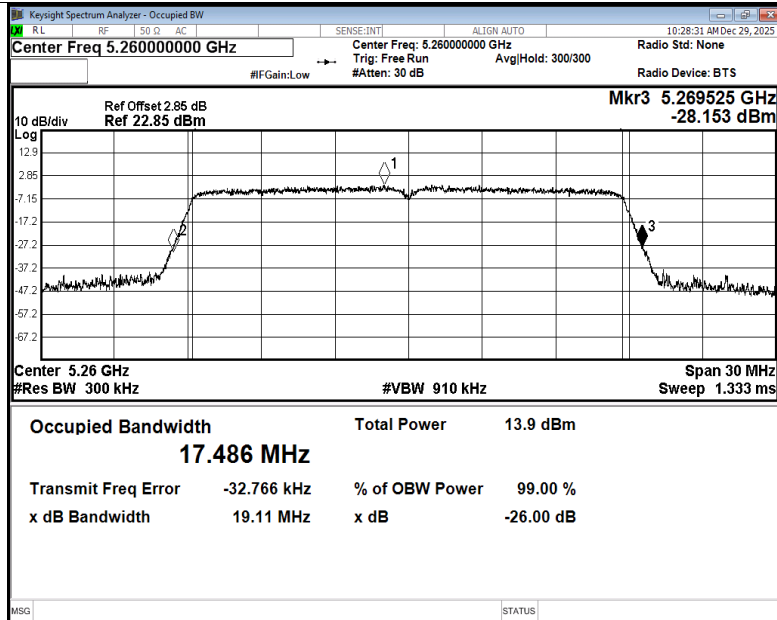

-26dB Bandwidth NVNT n20 5260MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

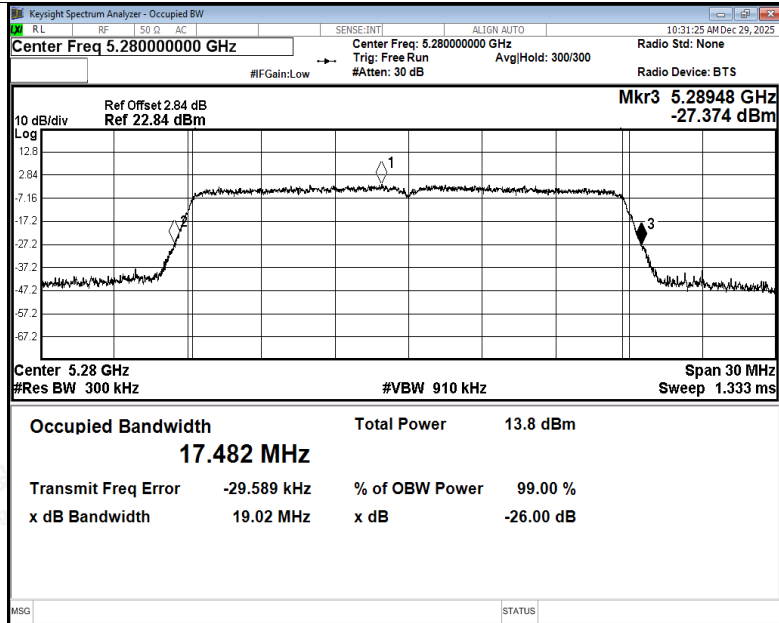

-26dB Bandwidth NVNT n20 5280MHz Ant3

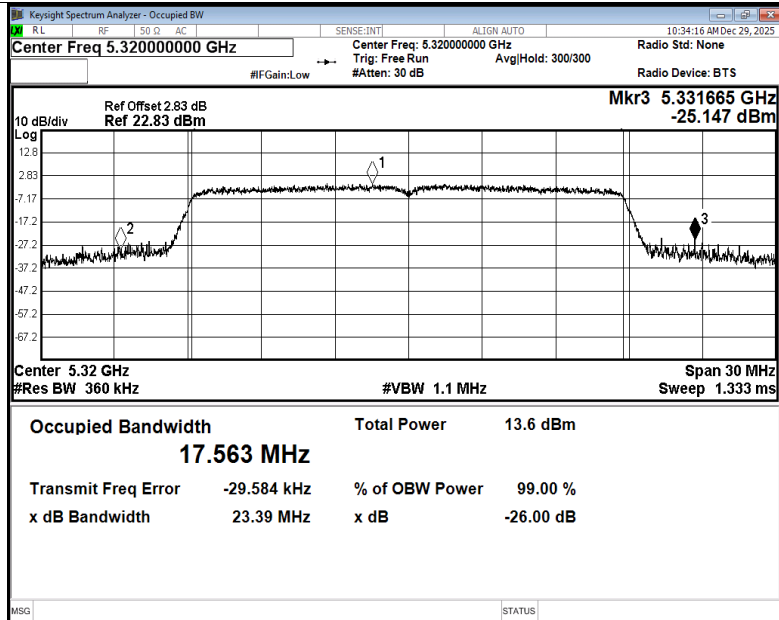

-26dB Bandwidth NVNT n20 5320MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

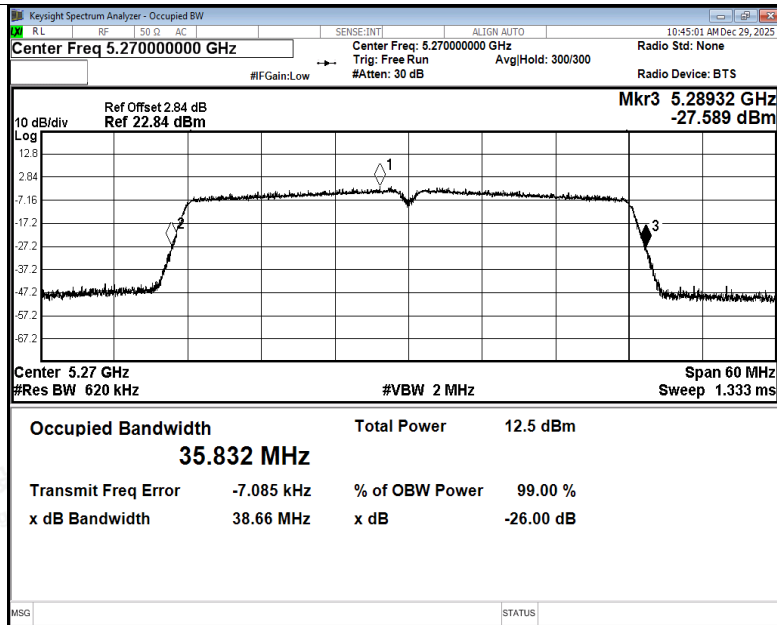

-26dB Bandwidth NVNT n40 5270MHz Ant3

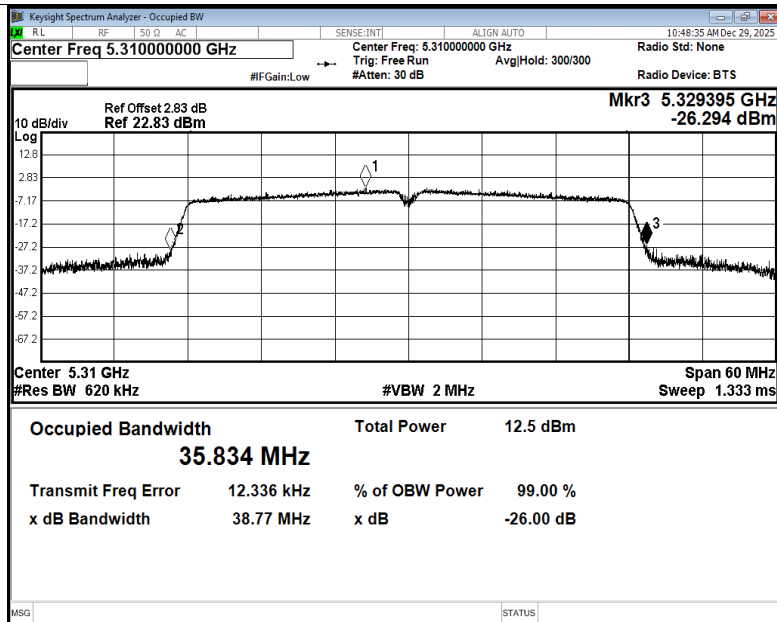

-26dB Bandwidth NVNT n40 5310MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

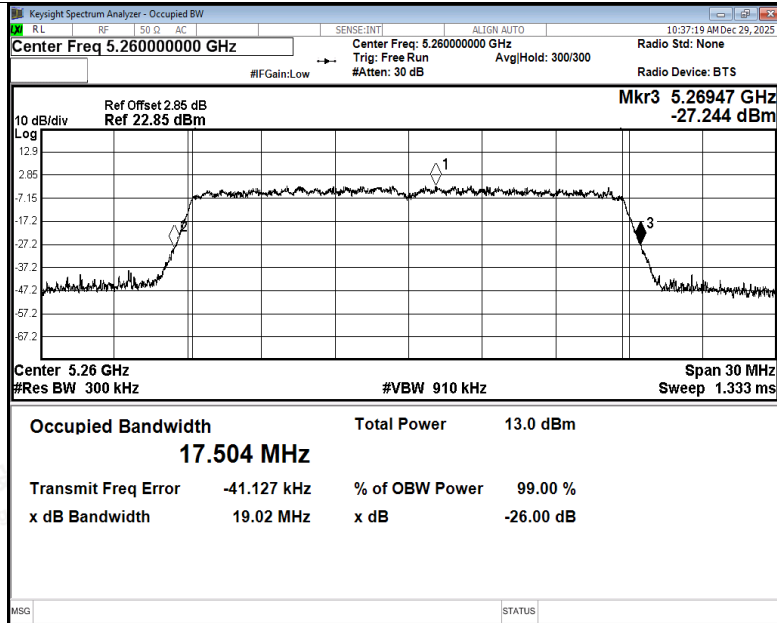

-26dB Bandwidth NVNT ac20 5260MHz Ant3

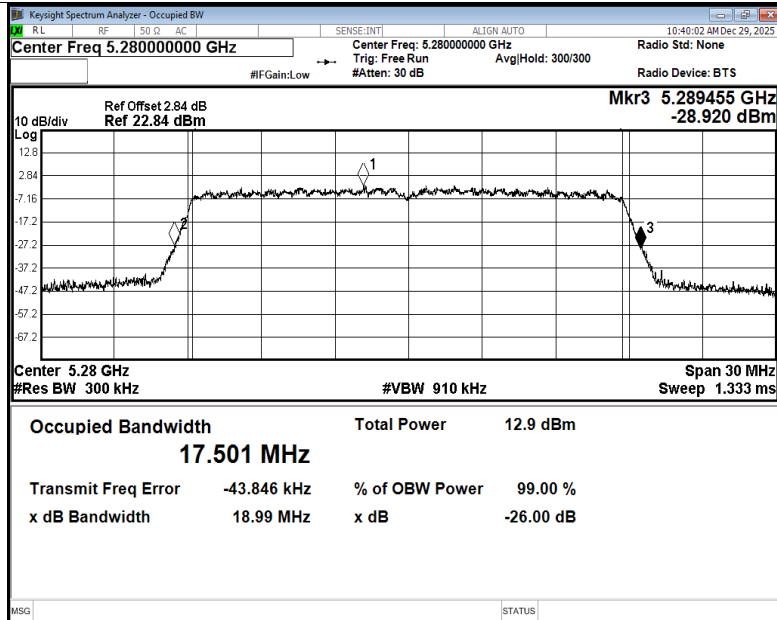

-26dB Bandwidth NVNT ac20 5280MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

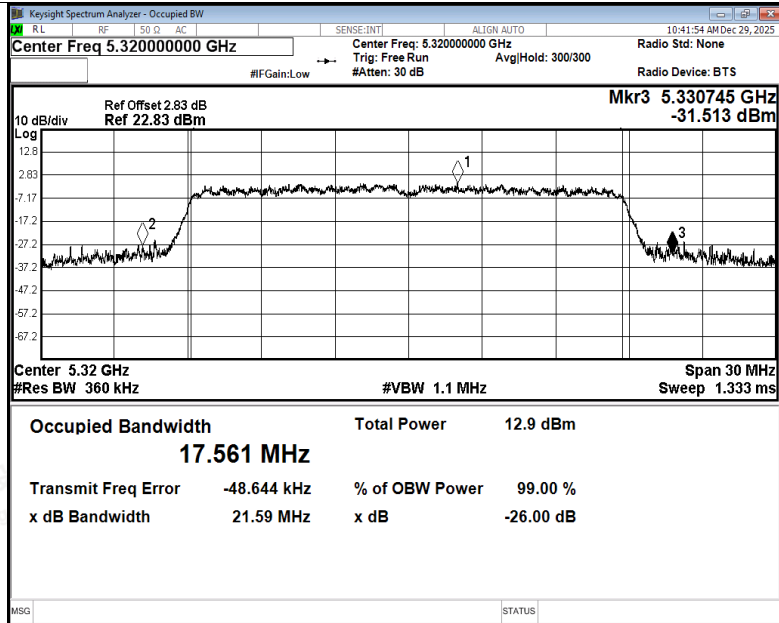

-26dB Bandwidth NVNT ac20 5320MHz Ant3

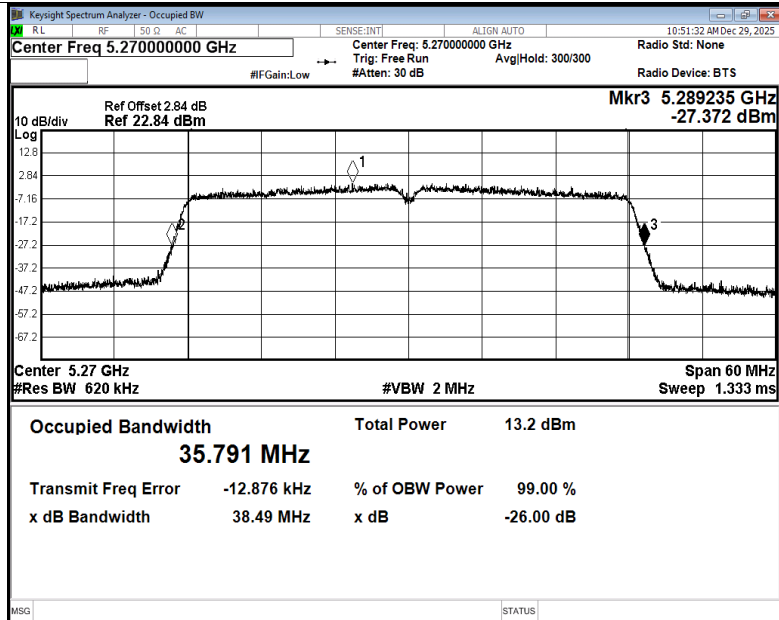

-26dB Bandwidth NVNT ac40 5270MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

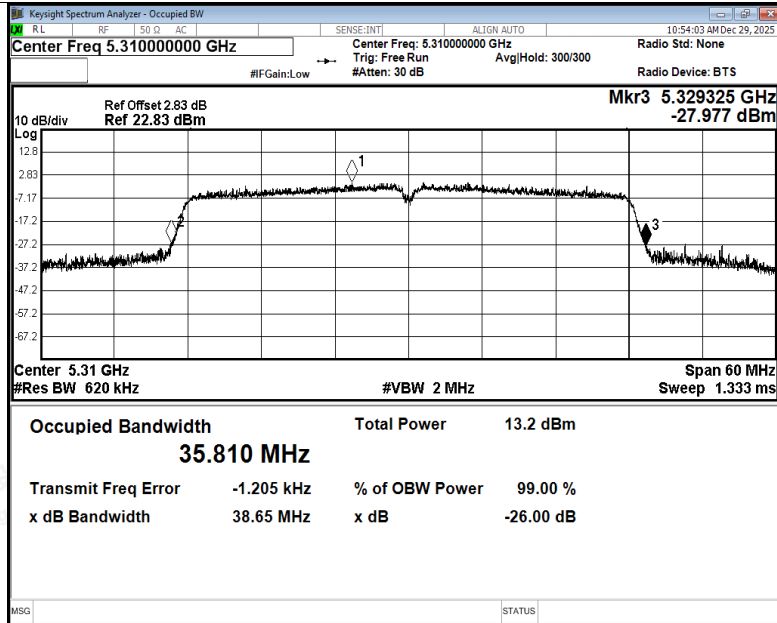

-26dB Bandwidth NVNT ac40 5310MHz Ant3

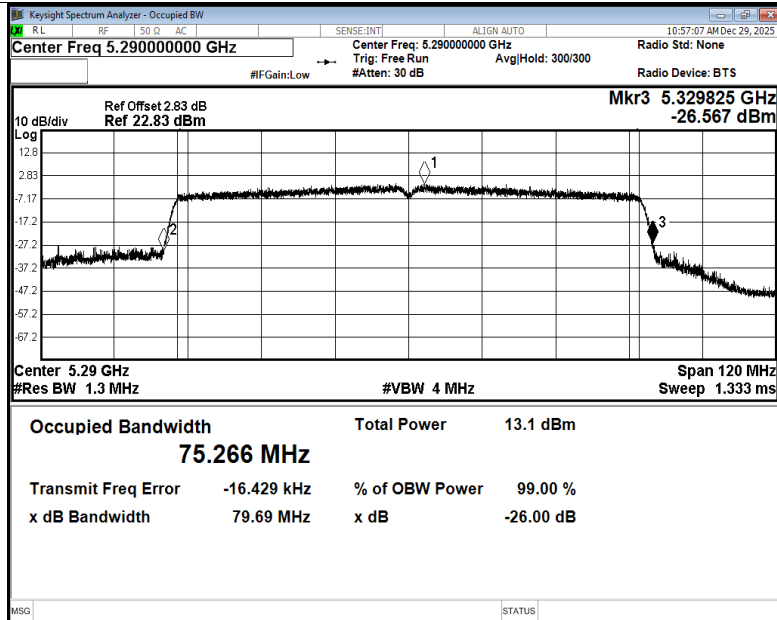

-26dB Bandwidth NVNT ac80 5290MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

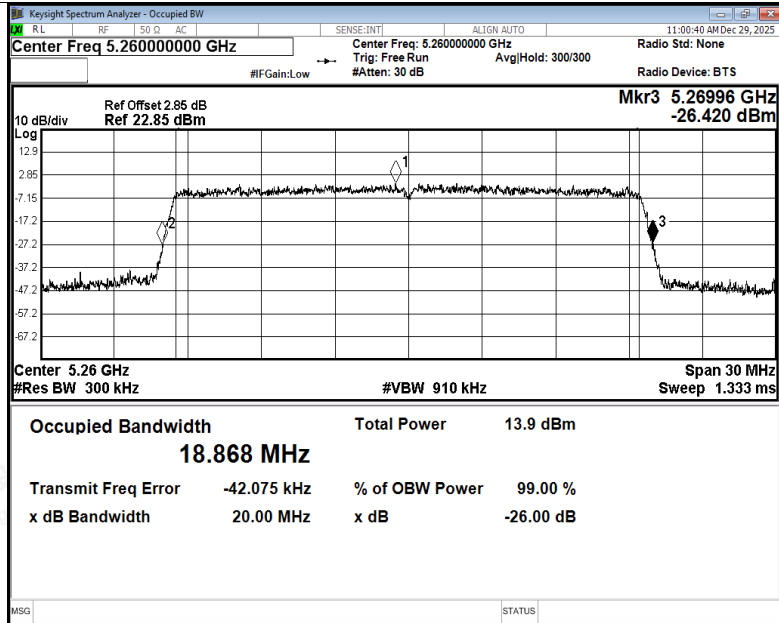

-26dB Bandwidth NVNT ax20 5260MHz Ant3

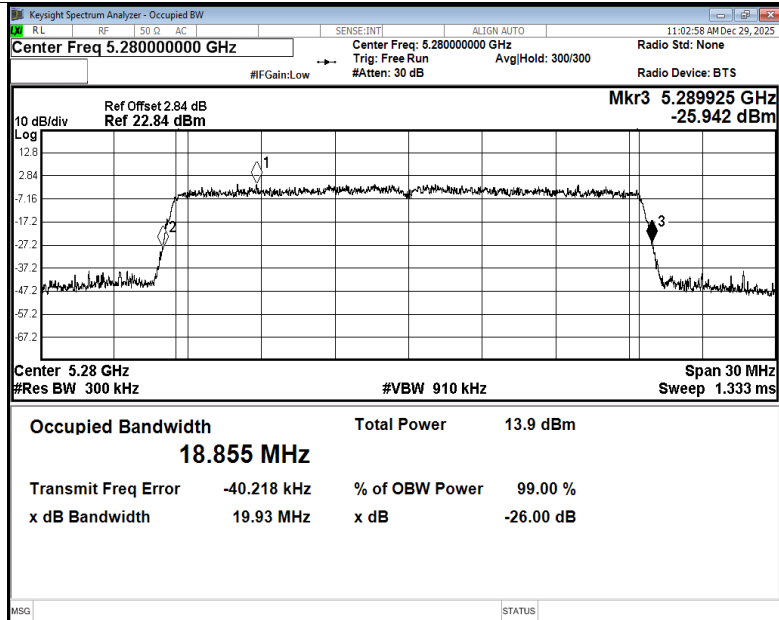

-26dB Bandwidth NVNT ax20 5280MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

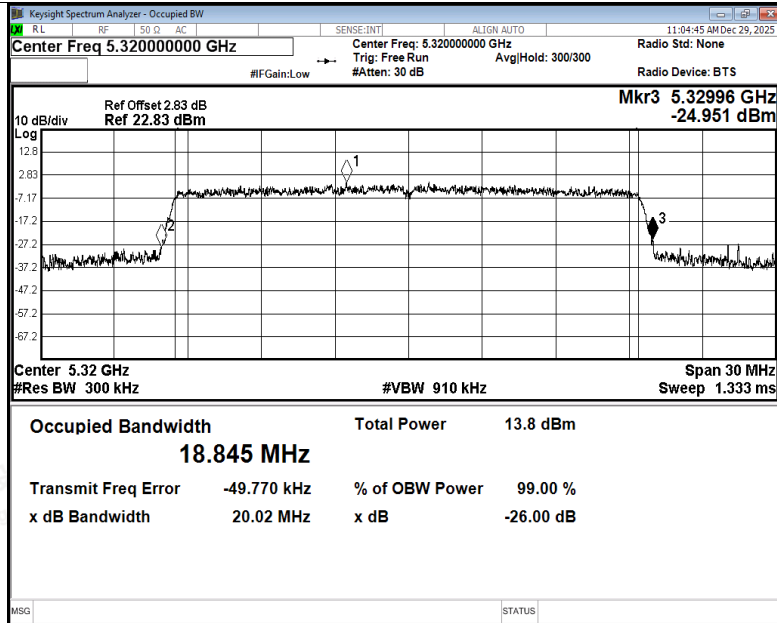

-26dB Bandwidth NVNT ax20 5320MHz Ant3

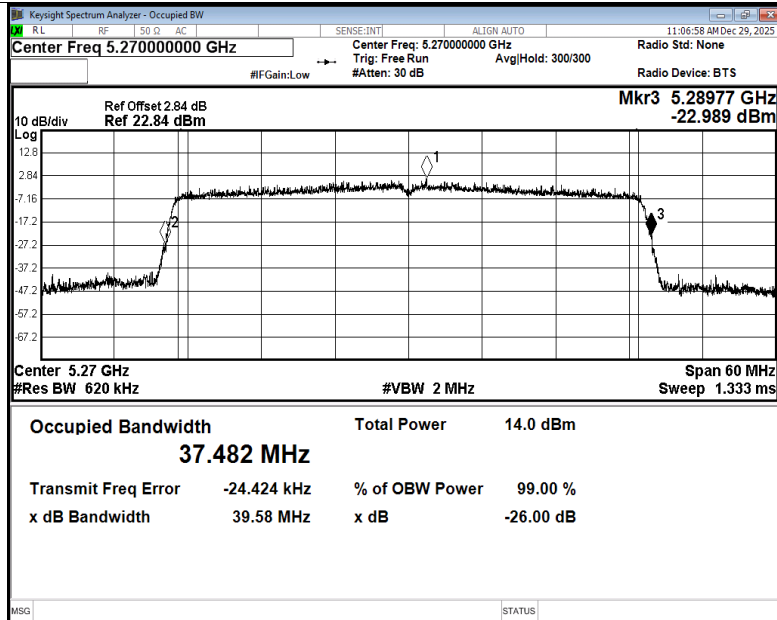

-26dB Bandwidth NVNT ax40 5270MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

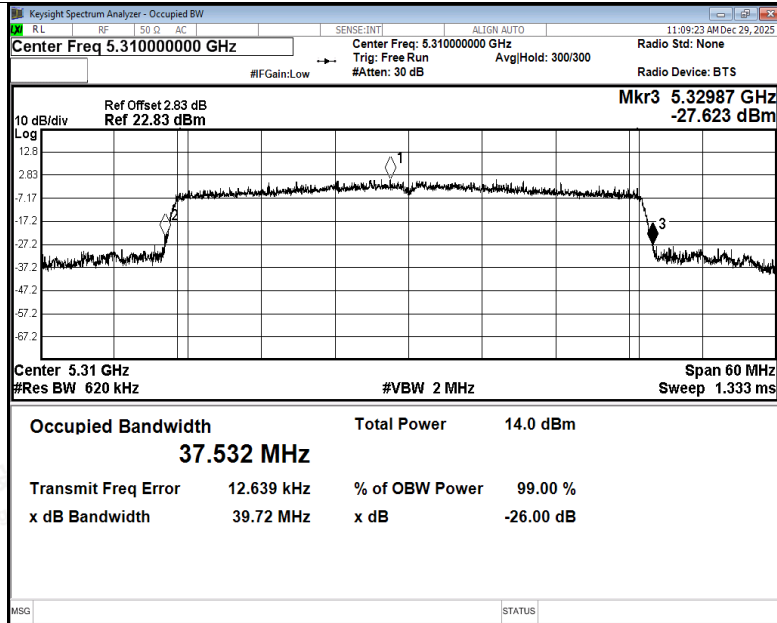

-26dB Bandwidth NVNT ax40 5310MHz Ant3

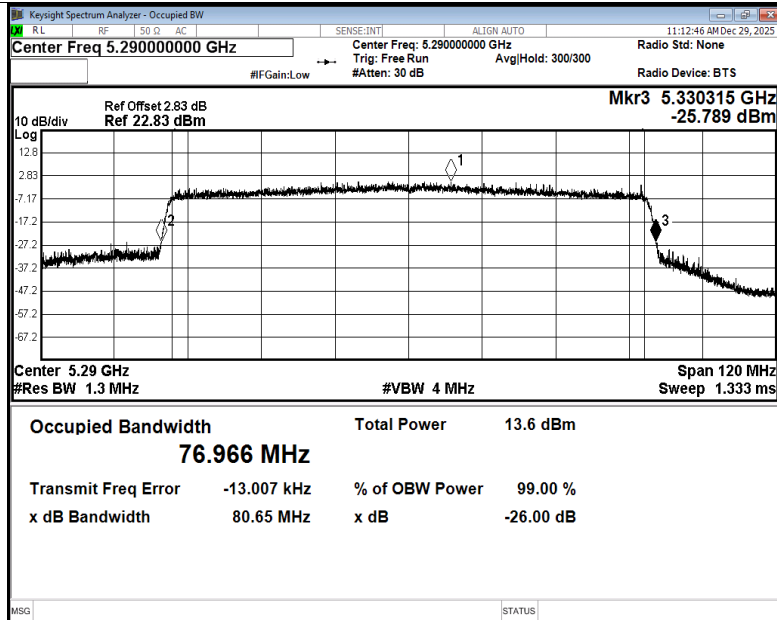

-26dB Bandwidth NVNT ax80 5290MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

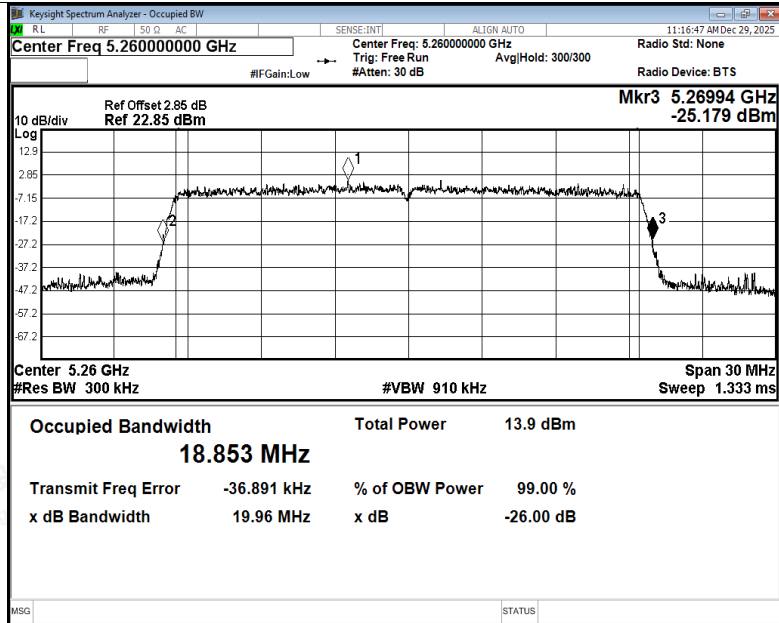

-26dB Bandwidth NVNT be20 5260MHz Ant3

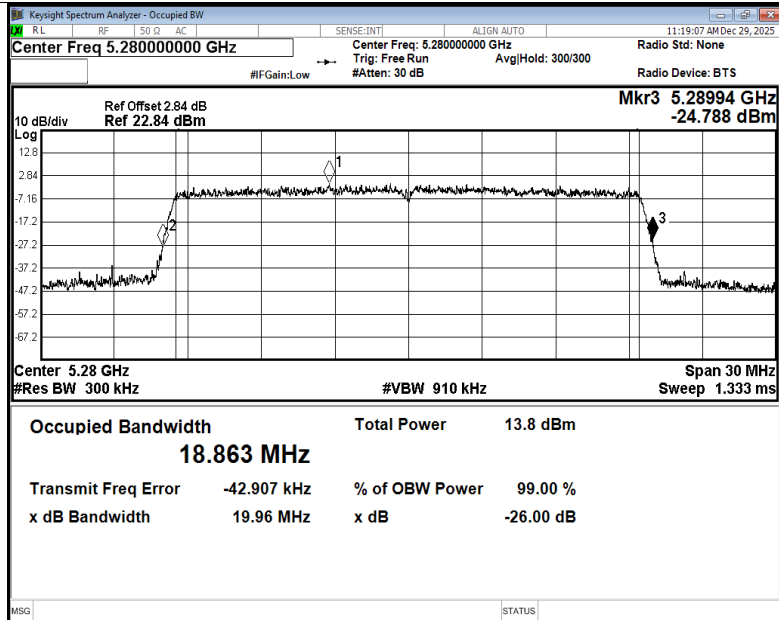

-26dB Bandwidth NVNT be20 5280MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

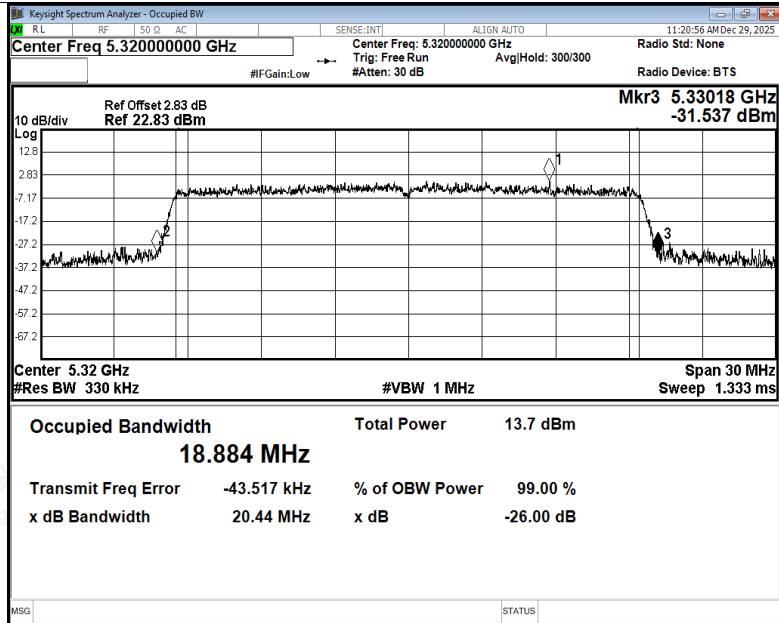

-26dB Bandwidth NVNT be20 5320MHz Ant3

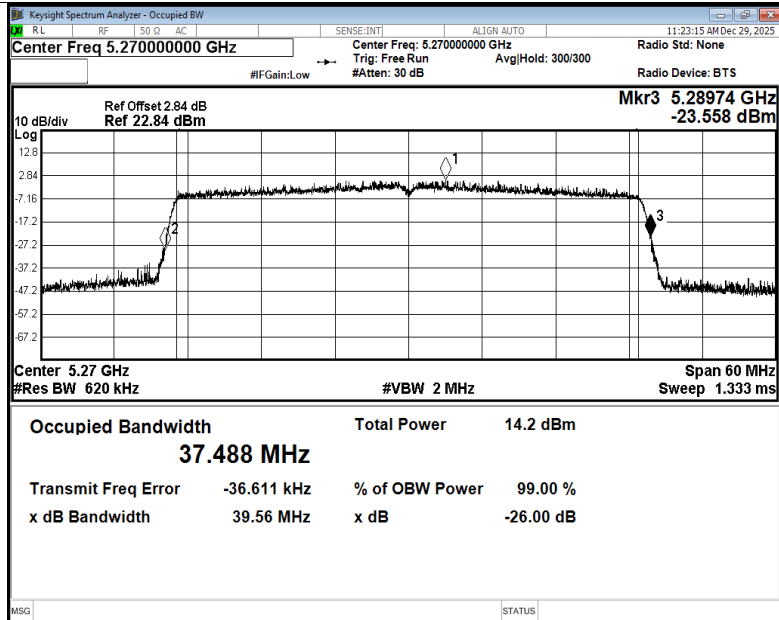

-26dB Bandwidth NVNT be40 5270MHz Ant3




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

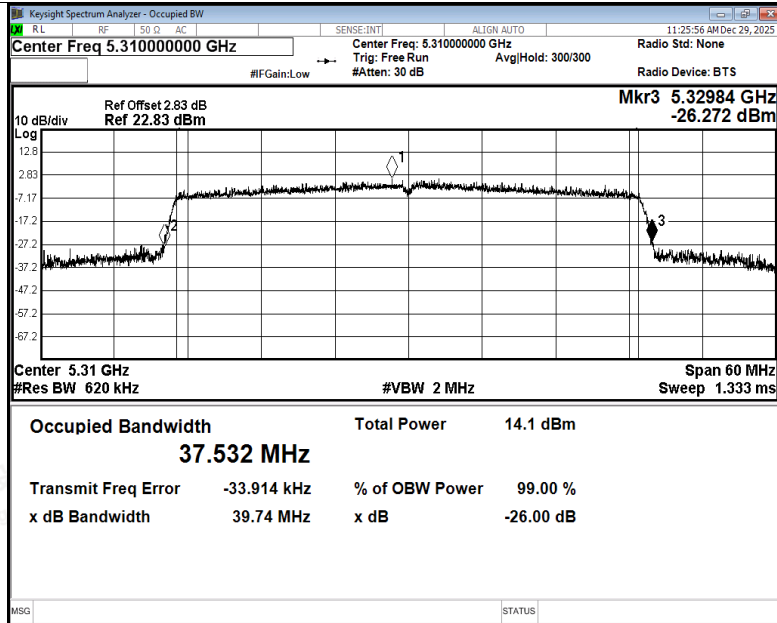

-26dB Bandwidth NVNT be40 5310MHz Ant3

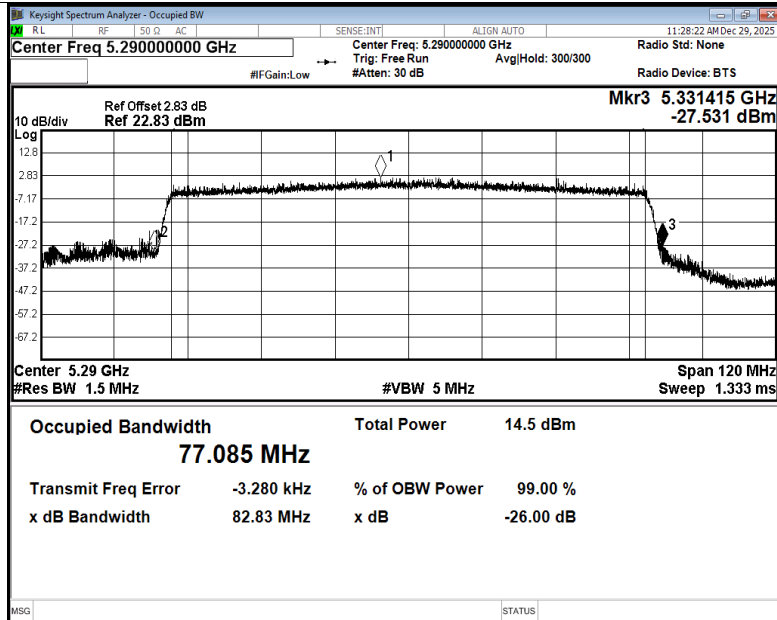

-26dB Bandwidth NVNT be80 5290MHz Ant3



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant4	18.46
NVNT	a	5280	Ant4	18.45
NVNT	a	5320	Ant4	22.57
NVNT	n20	5260	Ant4	19.05
NVNT	n20	5280	Ant4	19.06
NVNT	n20	5320	Ant4	22.6
NVNT	n40	5270	Ant4	38.71
NVNT	n40	5310	Ant4	39.81
NVNT	ac20	5260	Ant4	19.04
NVNT	ac20	5280	Ant4	19
NVNT	ac20	5320	Ant4	19.29
NVNT	ac40	5270	Ant4	38.43
NVNT	ac40	5310	Ant4	38.39
NVNT	ac80	5290	Ant4	90.2
NVNT	ax20	5260	Ant4	20.05
NVNT	ax20	5280	Ant4	19.96
NVNT	ax20	5320	Ant4	20
NVNT	ax40	5270	Ant4	39.62
NVNT	ax40	5310	Ant4	39.73
NVNT	ax80	5290	Ant4	80.59
NVNT	be20	5260	Ant4	19.98
NVNT	be20	5280	Ant4	19.97
NVNT	be20	5320	Ant4	19.96
NVNT	be40	5270	Ant4	39.66
NVNT	be40	5310	Ant4	39.75
NVNT	be80	5290	Ant4	80.51




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

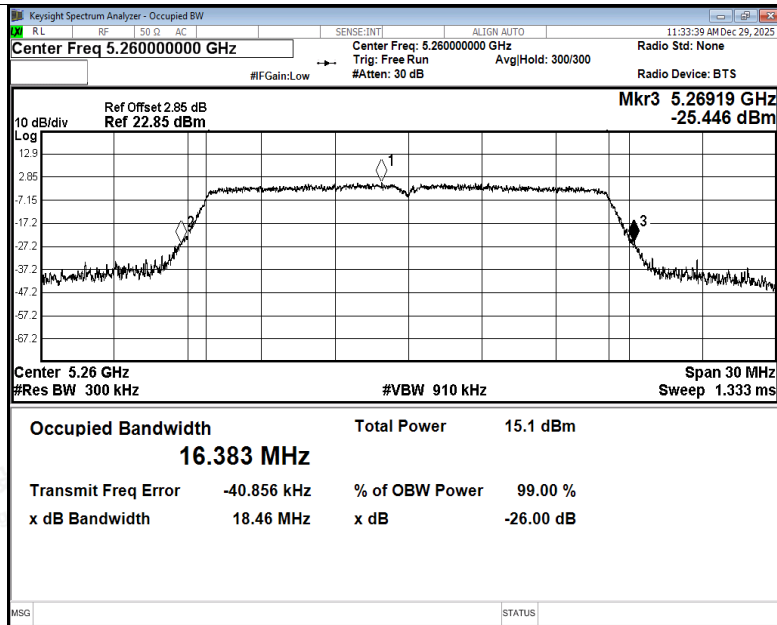

-26dB Bandwidth NVNT a 5260MHz Ant4

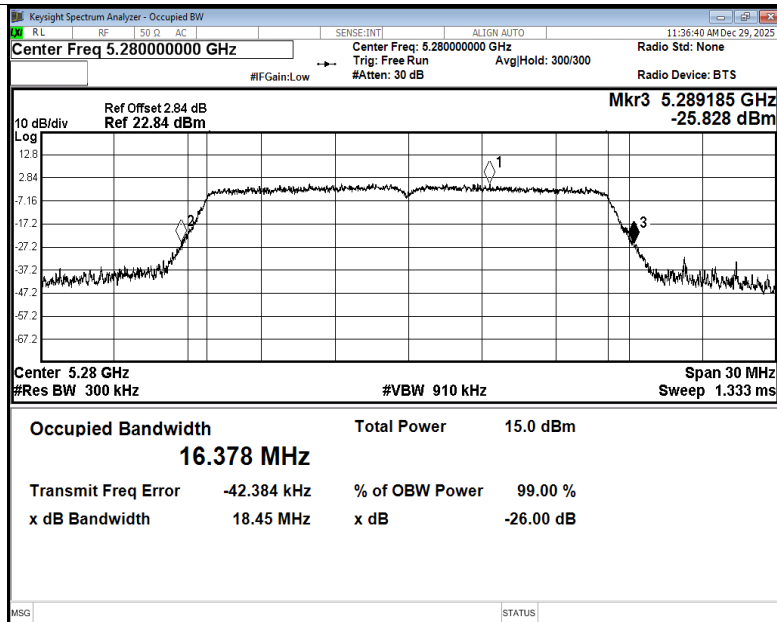

-26dB Bandwidth NVNT a 5280MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

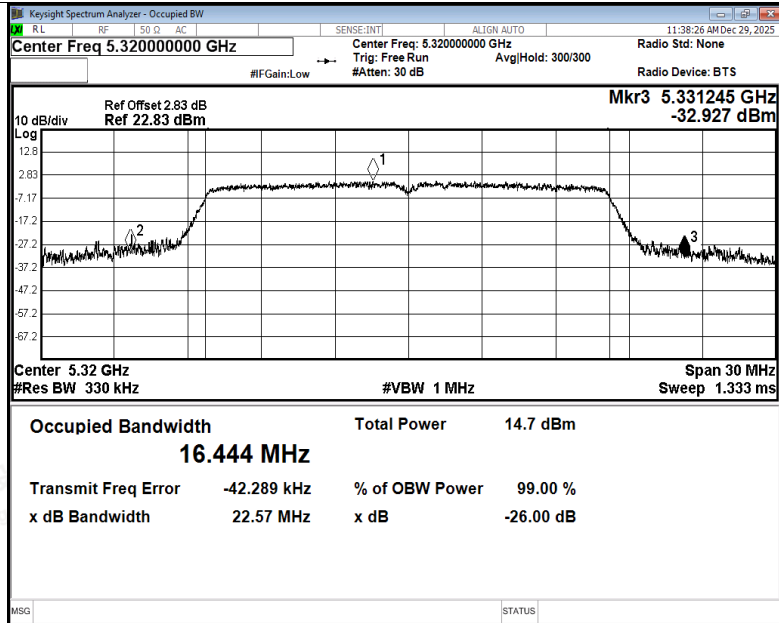

-26dB Bandwidth NVNT a 5320MHz Ant4

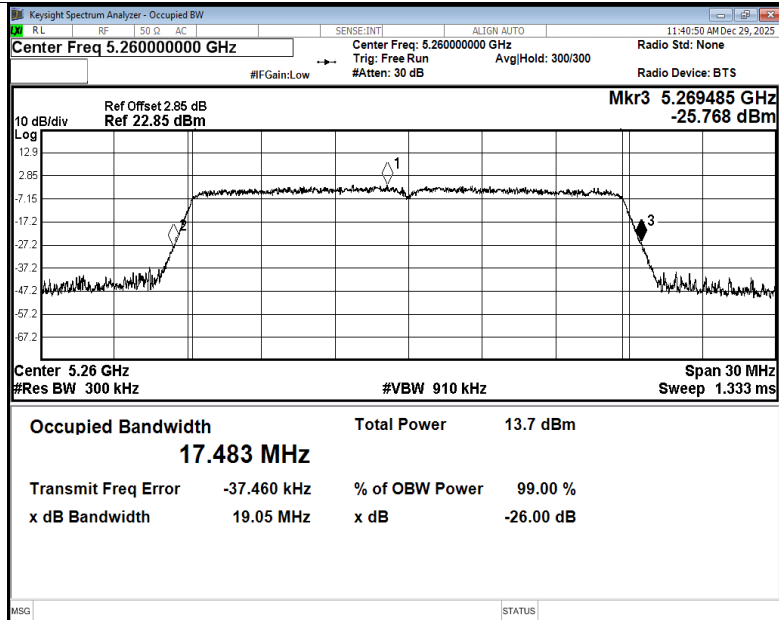

-26dB Bandwidth NVNT n20 5260MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

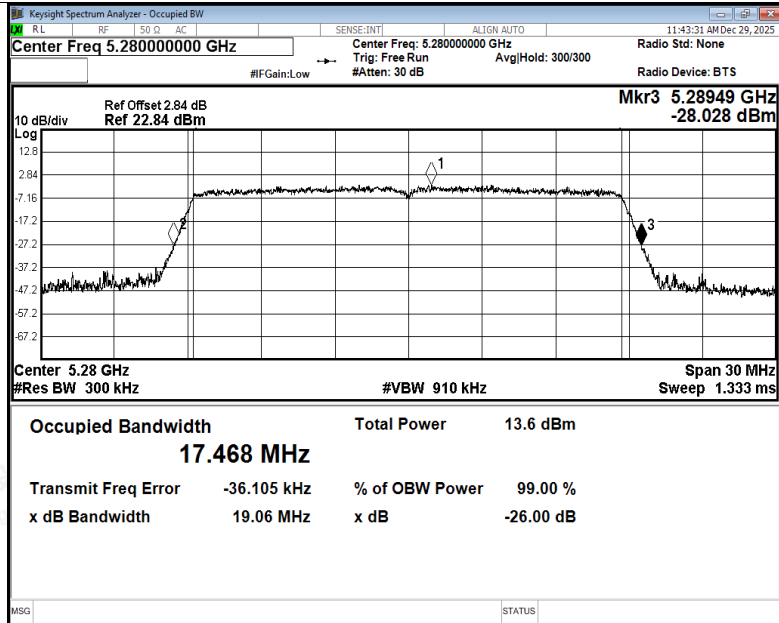

-26dB Bandwidth NVNT n20 5280MHz Ant4

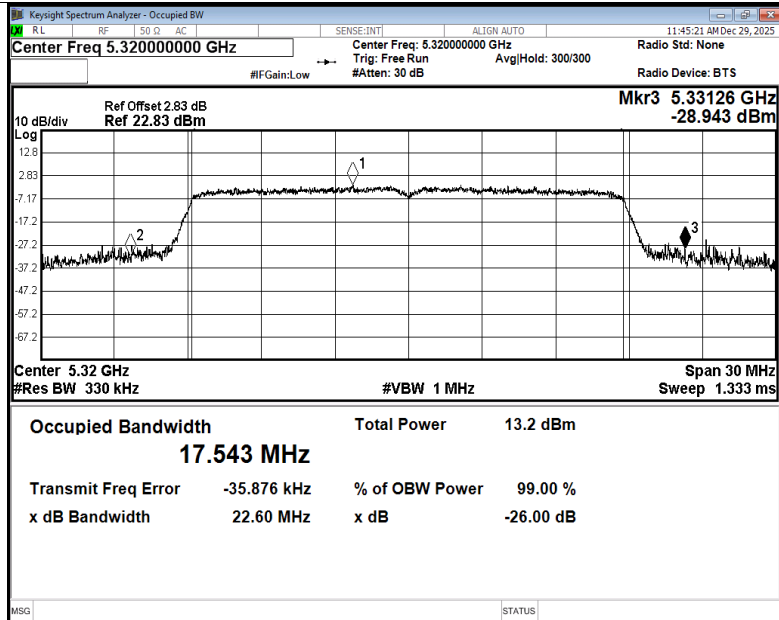

-26dB Bandwidth NVNT n20 5320MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

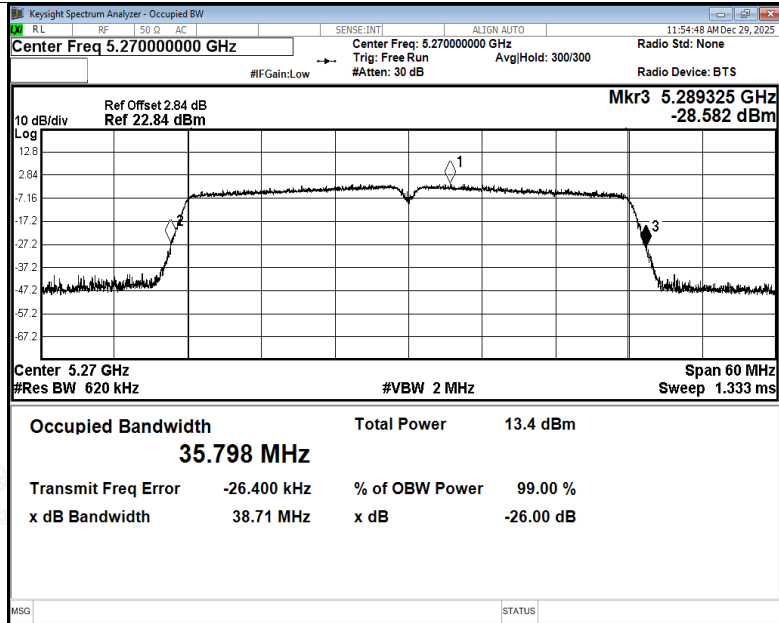

-26dB Bandwidth NVNT n40 5270MHz Ant4

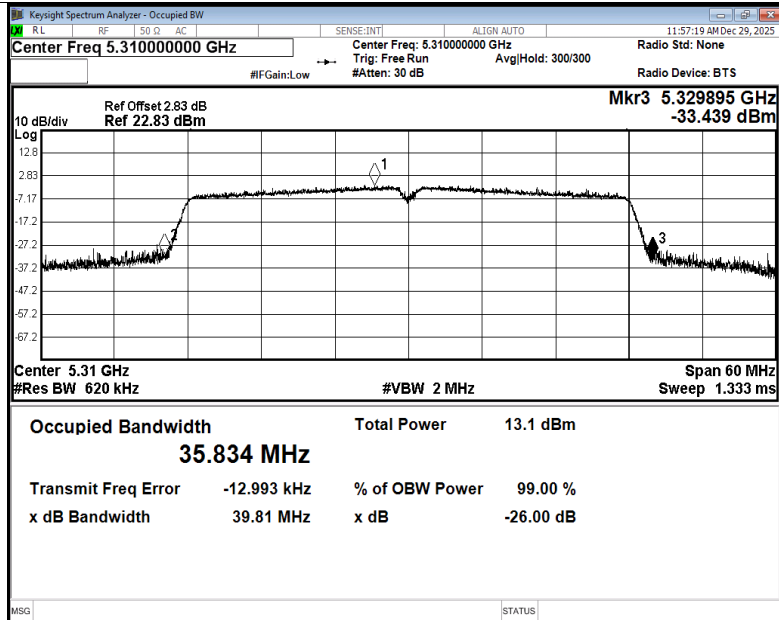

-26dB Bandwidth NVNT n40 5310MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

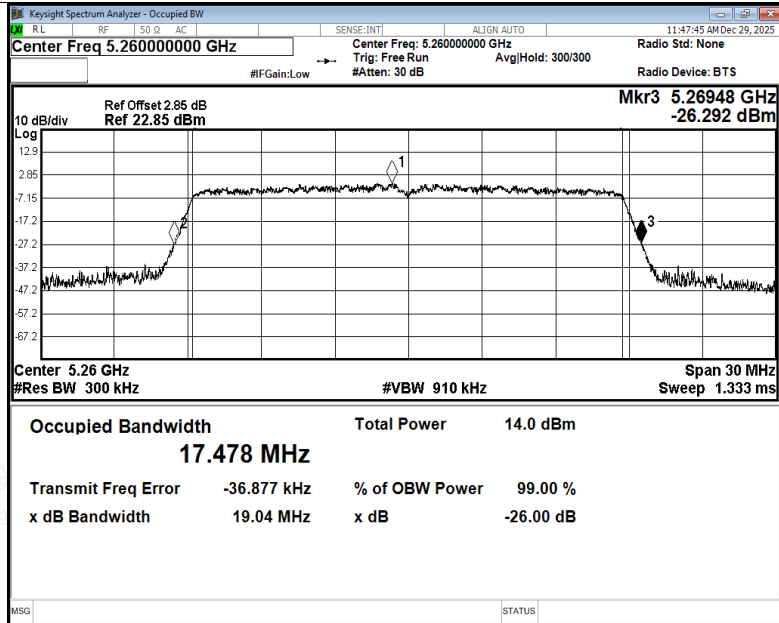

-26dB Bandwidth NVNT ac20 5260MHz Ant4

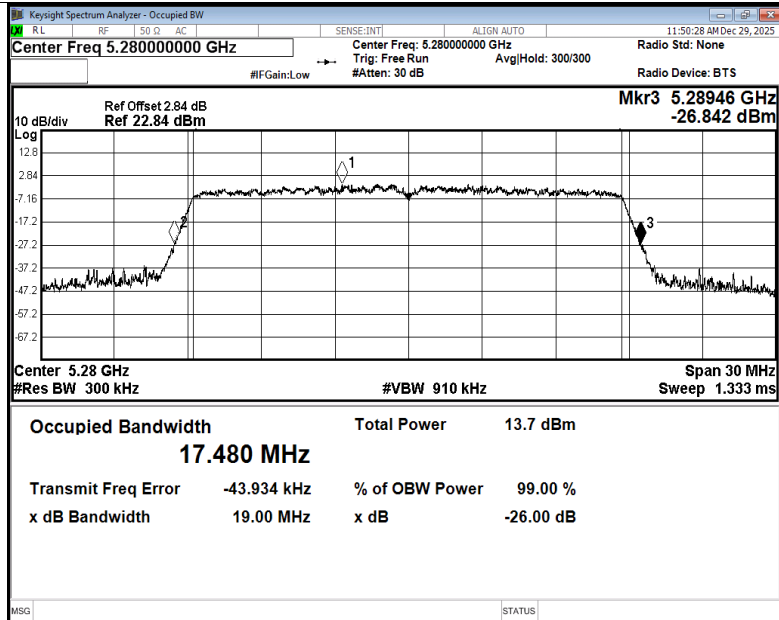

-26dB Bandwidth NVNT ac20 5280MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

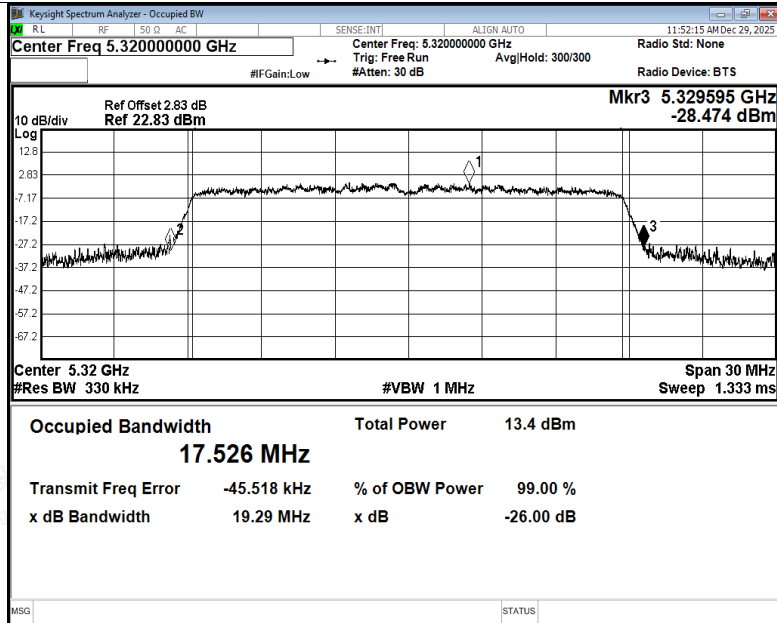

-26dB Bandwidth NVNT ac20 5320MHz Ant4

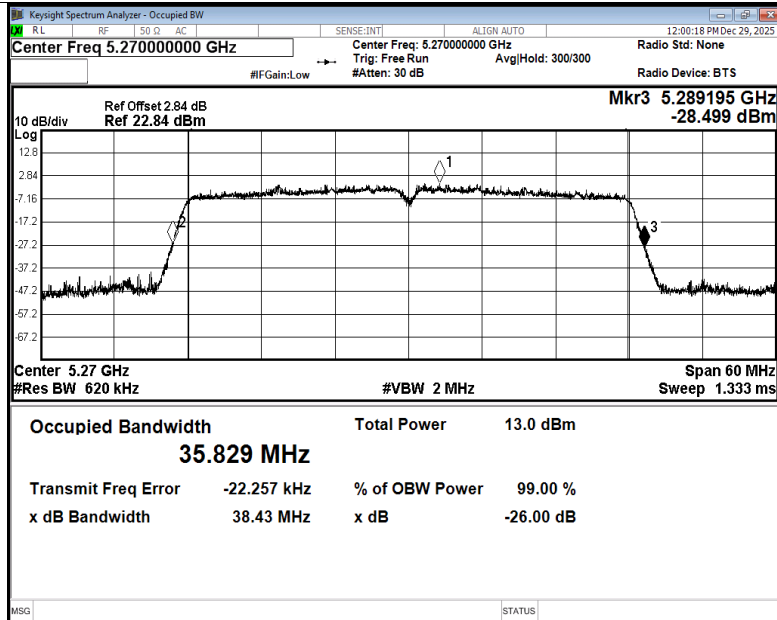

-26dB Bandwidth NVNT ac40 5270MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

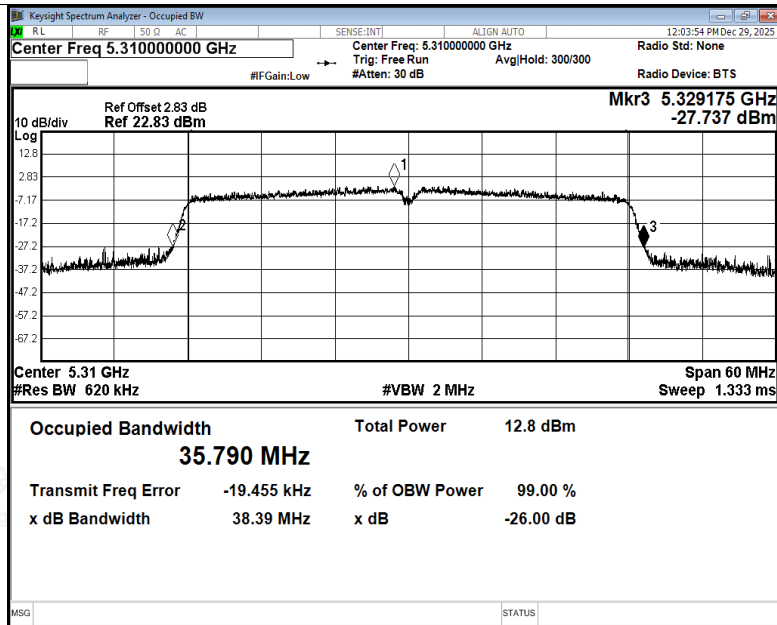

-26dB Bandwidth NVNT ac40 5310MHz Ant4

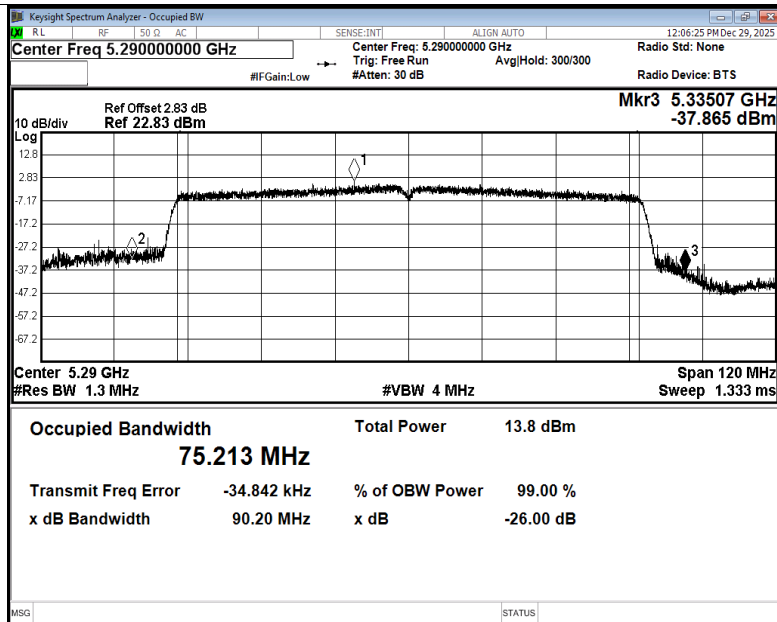

-26dB Bandwidth NVNT ac80 5290MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

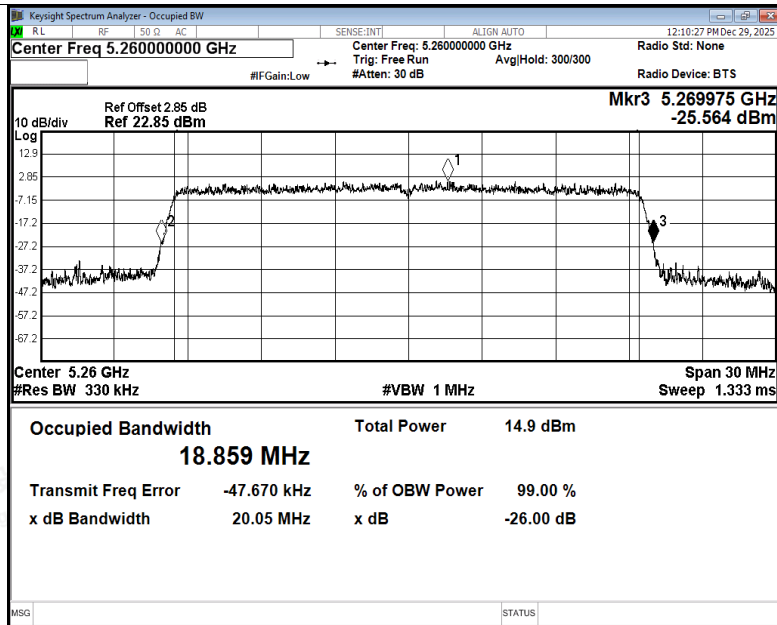

-26dB Bandwidth NVNT ax20 5260MHz Ant4

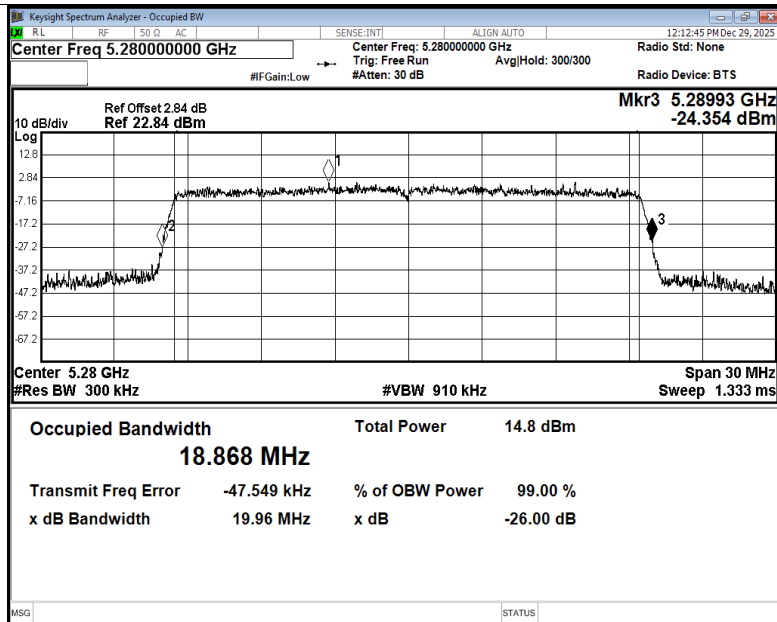

-26dB Bandwidth NVNT ax20 5280MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

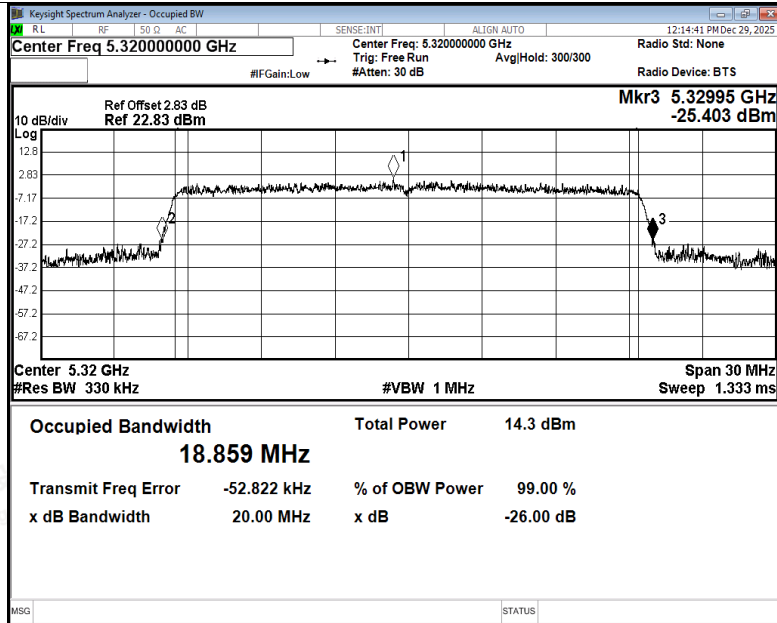

-26dB Bandwidth NVNT ax20 5320MHz Ant4

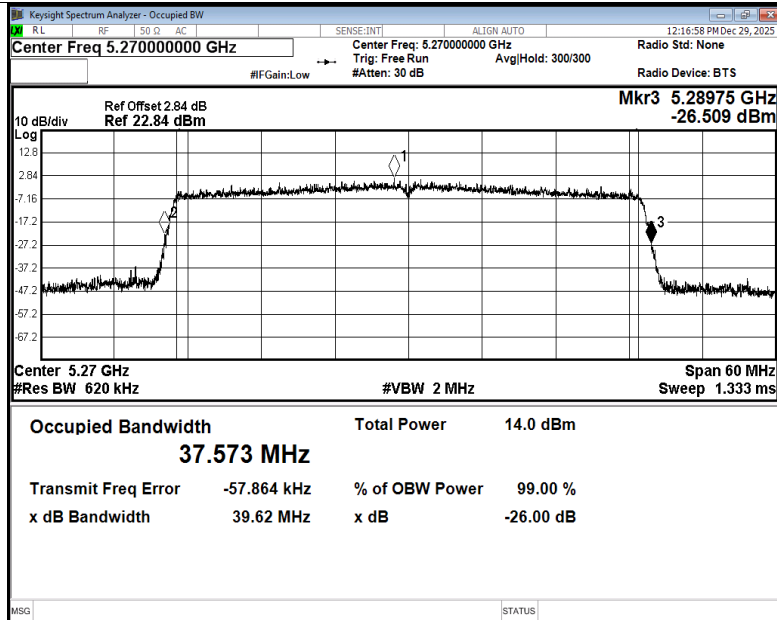

-26dB Bandwidth NVNT ax40 5270MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

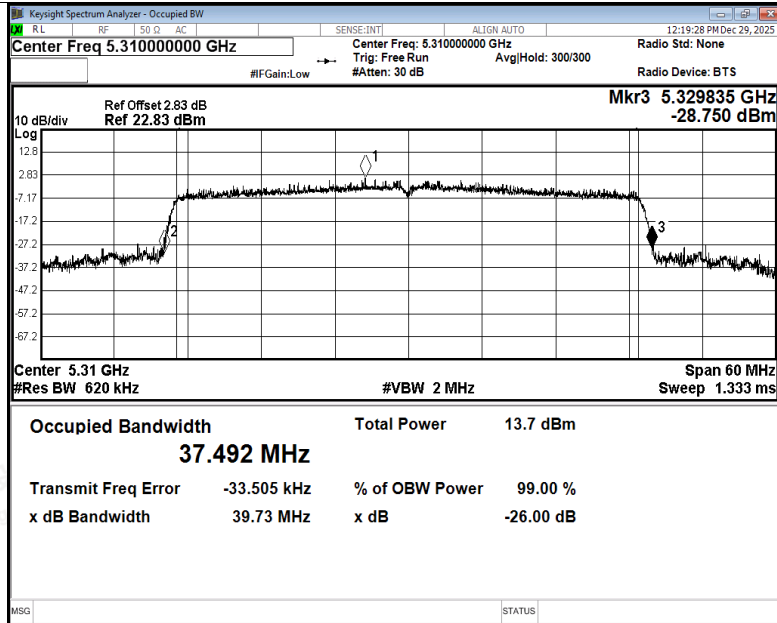

-26dB Bandwidth NVNT ax40 5310MHz Ant4

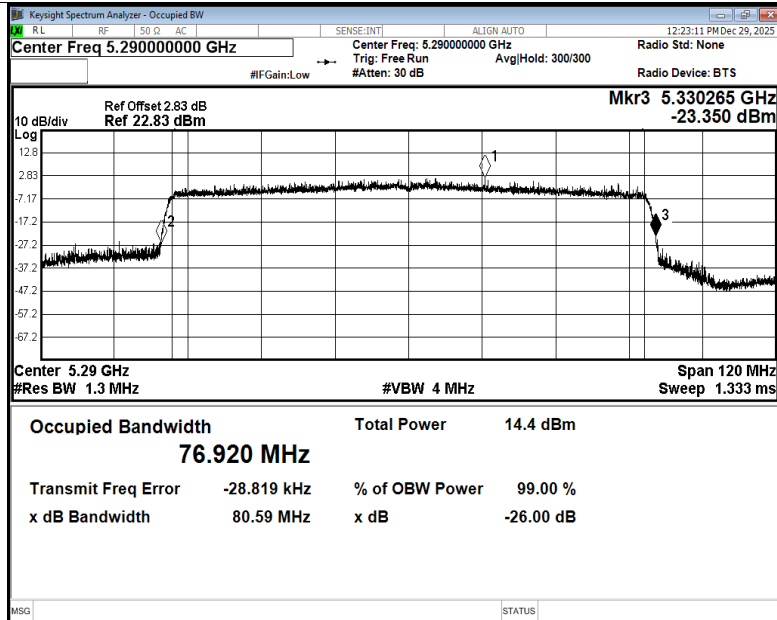

-26dB Bandwidth NVNT ax80 5290MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

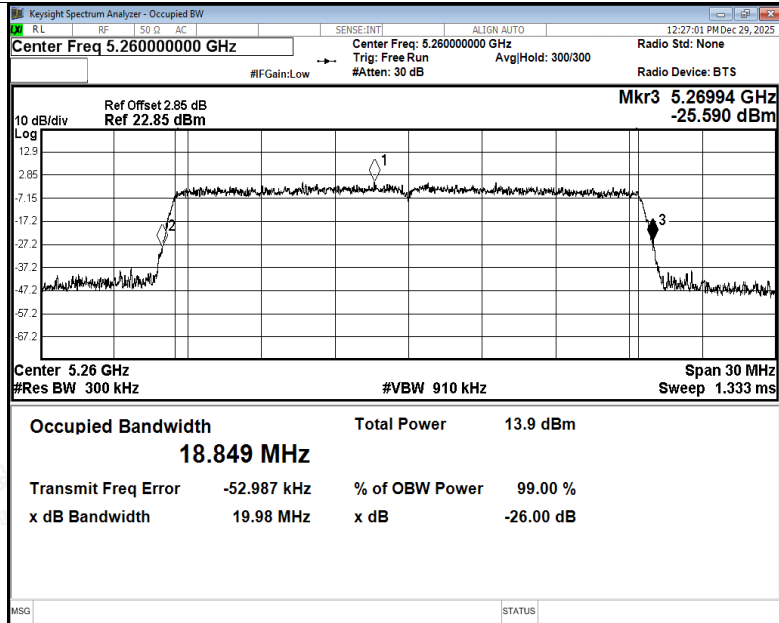

-26dB Bandwidth NVNT be20 5260MHz Ant4

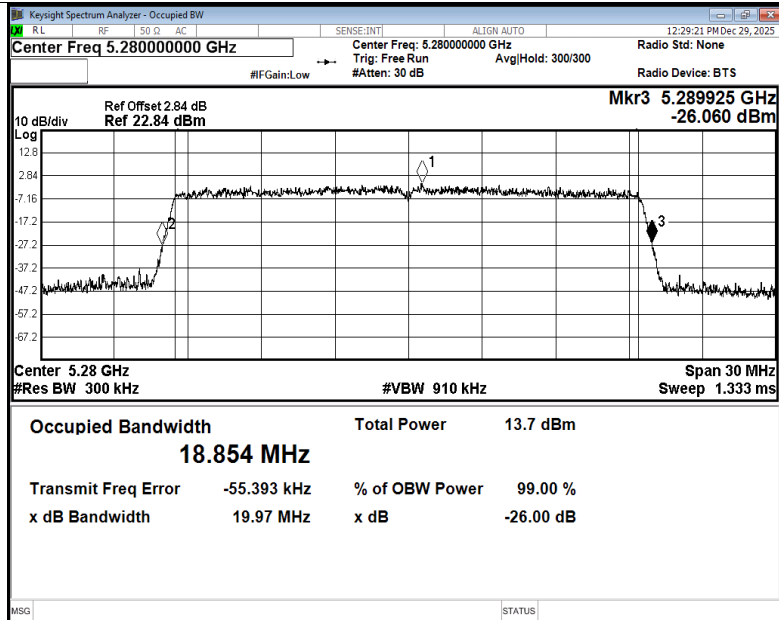

-26dB Bandwidth NVNT be20 5280MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

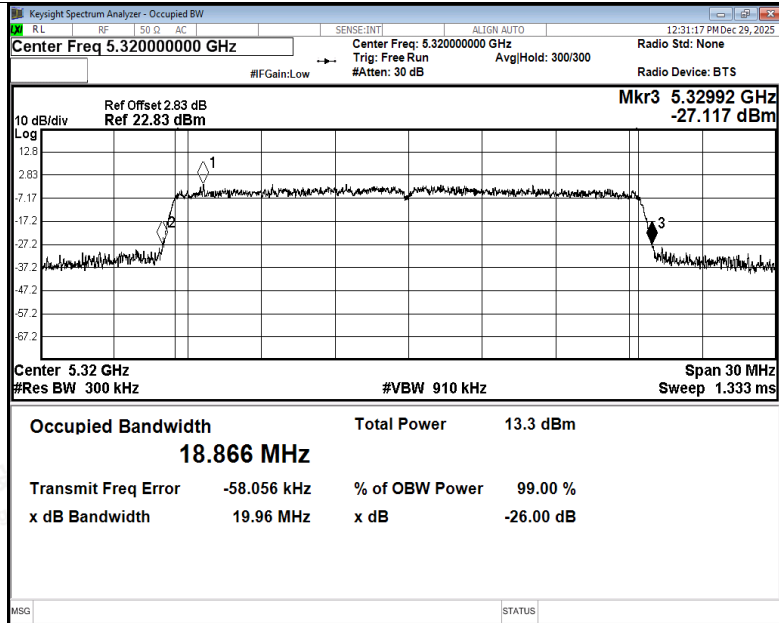

-26dB Bandwidth NVNT be20 5320MHz Ant4

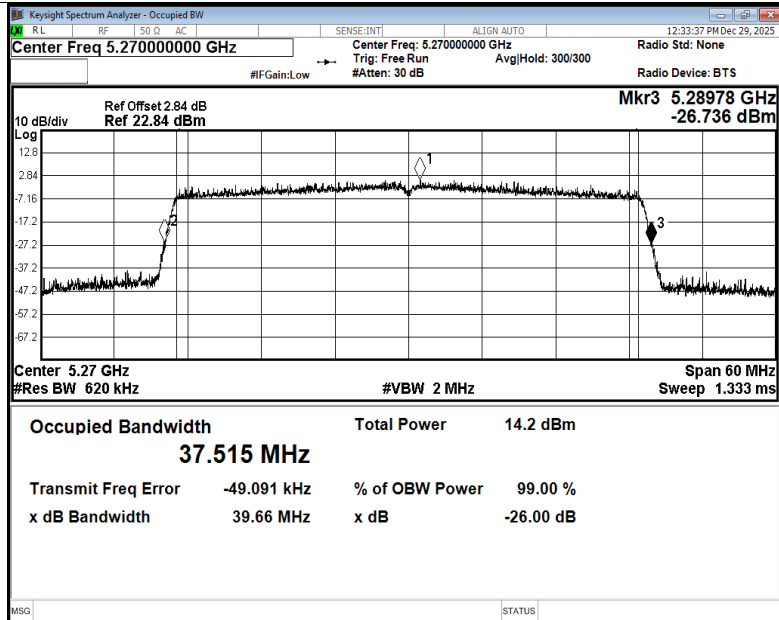

-26dB Bandwidth NVNT be40 5270MHz Ant4




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

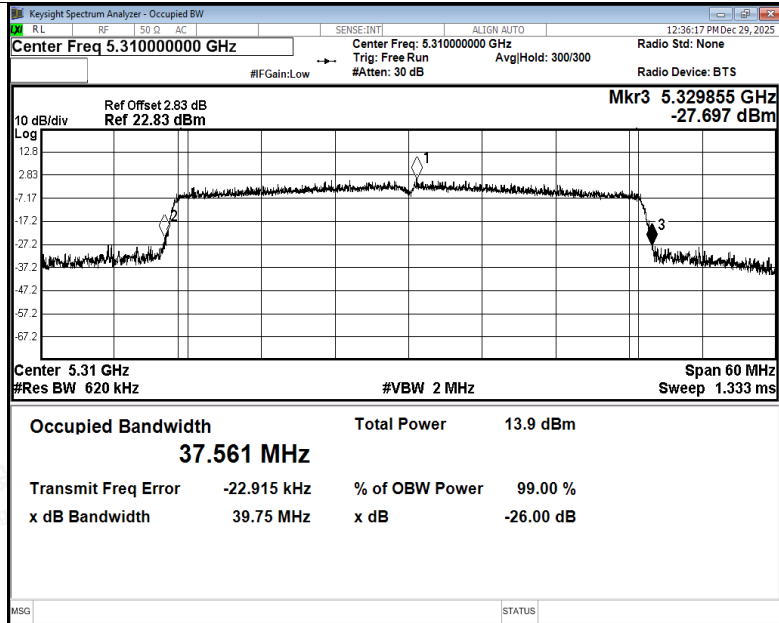

-26dB Bandwidth NVNT be40 5310MHz Ant4

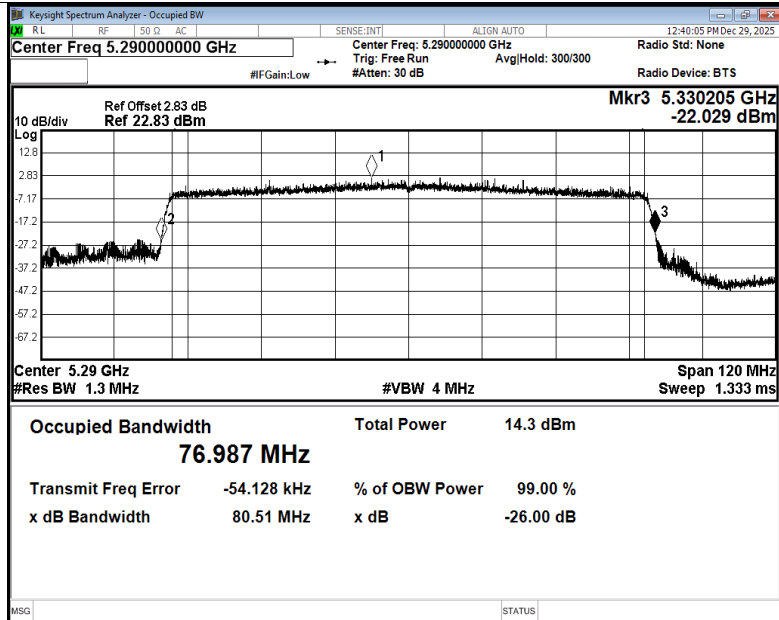

-26dB Bandwidth NVNT be80 5290MHz Ant4



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant5	18.49
NVNT	a	5280	Ant5	18.68
NVNT	a	5320	Ant5	22.81
NVNT	n20	5260	Ant5	19.11
NVNT	n20	5280	Ant5	19.18
NVNT	n20	5320	Ant5	24.15
NVNT	n40	5270	Ant5	38.67
NVNT	n40	5310	Ant5	48.12
NVNT	ac20	5260	Ant5	19.03
NVNT	ac20	5280	Ant5	18.97
NVNT	ac20	5320	Ant5	23.56
NVNT	ac40	5270	Ant5	38.49
NVNT	ac40	5310	Ant5	38.7
NVNT	ac80	5290	Ant5	93.99
NVNT	ax20	5260	Ant5	19.96
NVNT	ax20	5280	Ant5	19.98
NVNT	ax20	5320	Ant5	20.09
NVNT	ax40	5270	Ant5	39.5
NVNT	ax40	5310	Ant5	39.67
NVNT	ax80	5290	Ant5	80.79
NVNT	be20	5260	Ant5	19.95
NVNT	be20	5280	Ant5	19.93
NVNT	be20	5320	Ant5	19.91
NVNT	be40	5270	Ant5	39.52
NVNT	be40	5310	Ant5	39.82
NVNT	be80	5290	Ant5	81.02




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

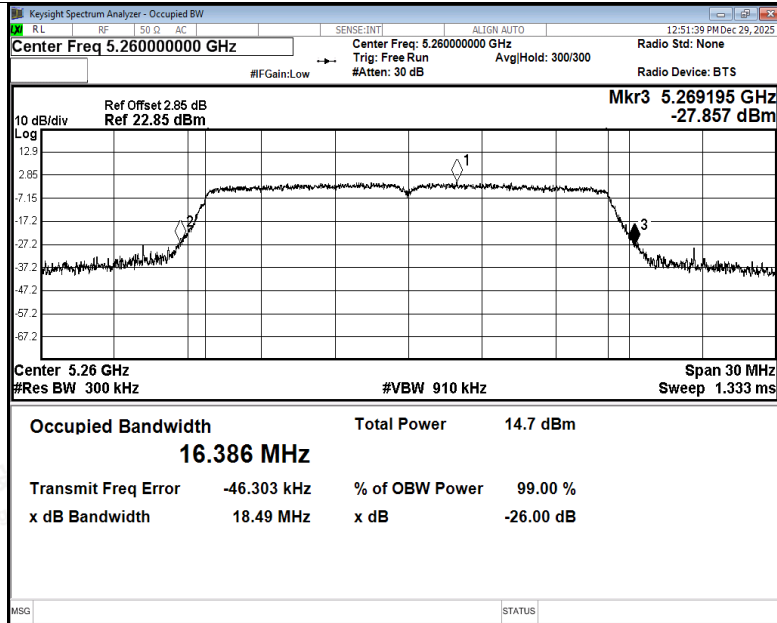

-26dB Bandwidth NVNT a 5260MHz Ant5

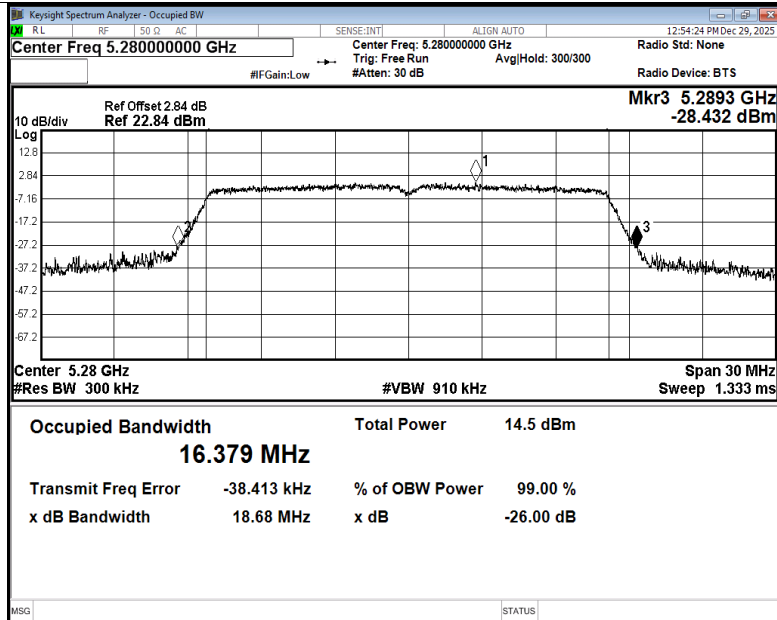

-26dB Bandwidth NVNT a 5280MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

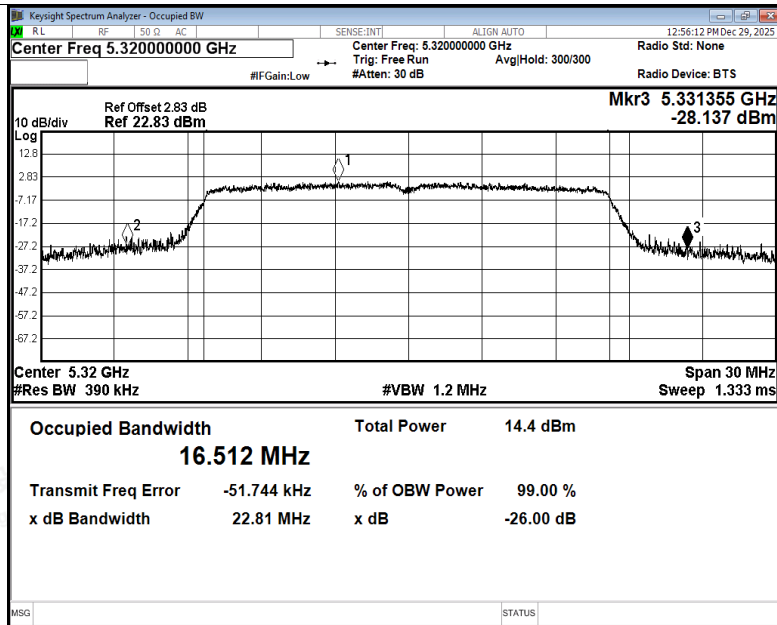

-26dB Bandwidth NVNT a 5320MHz Ant5

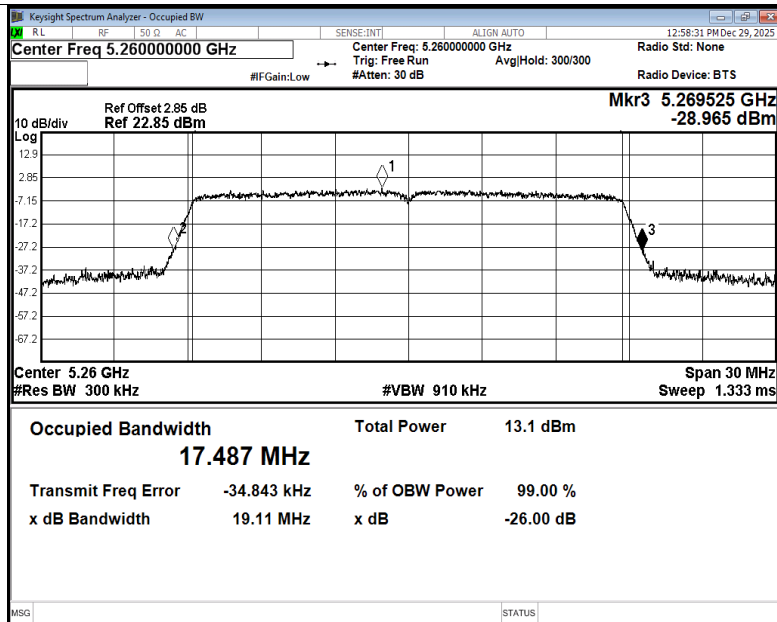

-26dB Bandwidth NVNT n20 5260MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

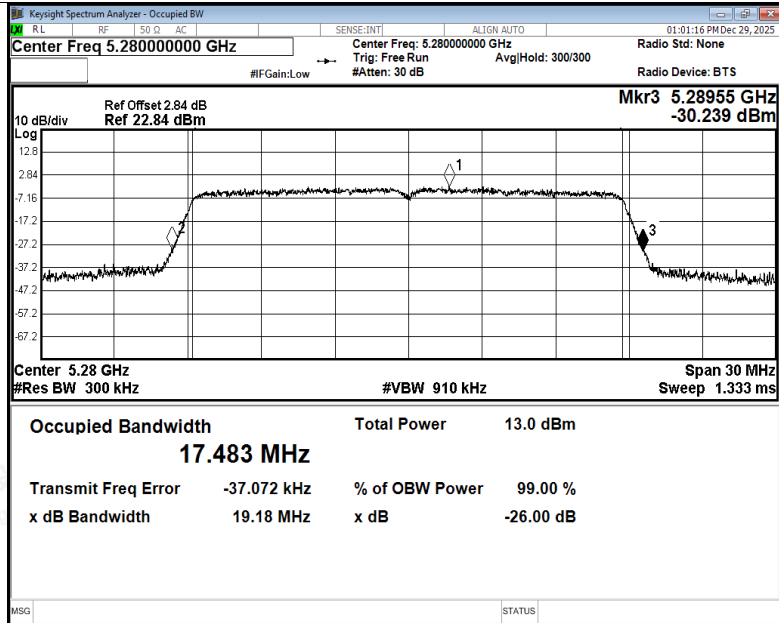

-26dB Bandwidth NVNT n20 5280MHz Ant5

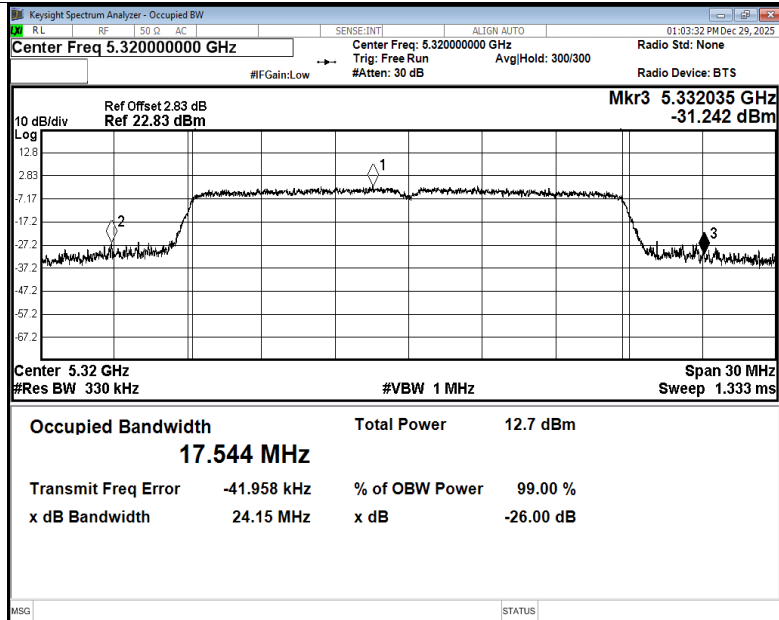

-26dB Bandwidth NVNT n20 5320MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

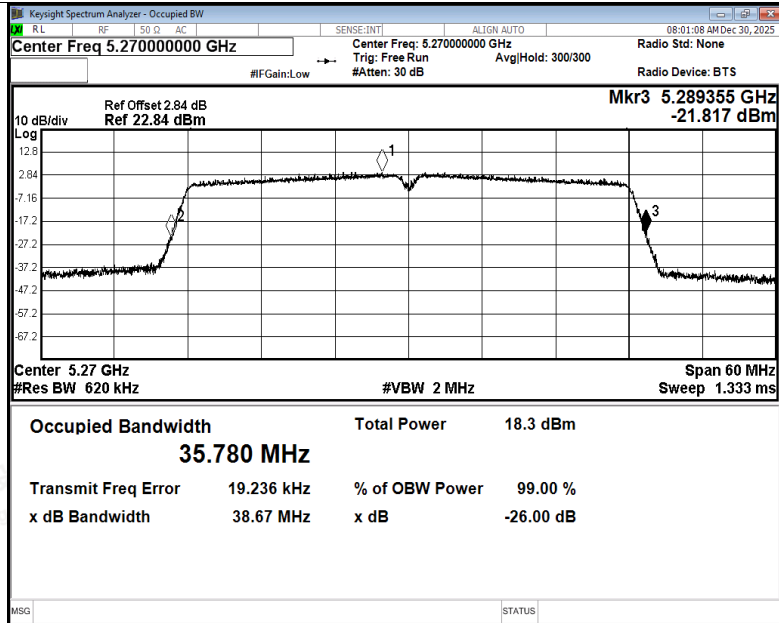

-26dB Bandwidth NVNT n40 5270MHz Ant5

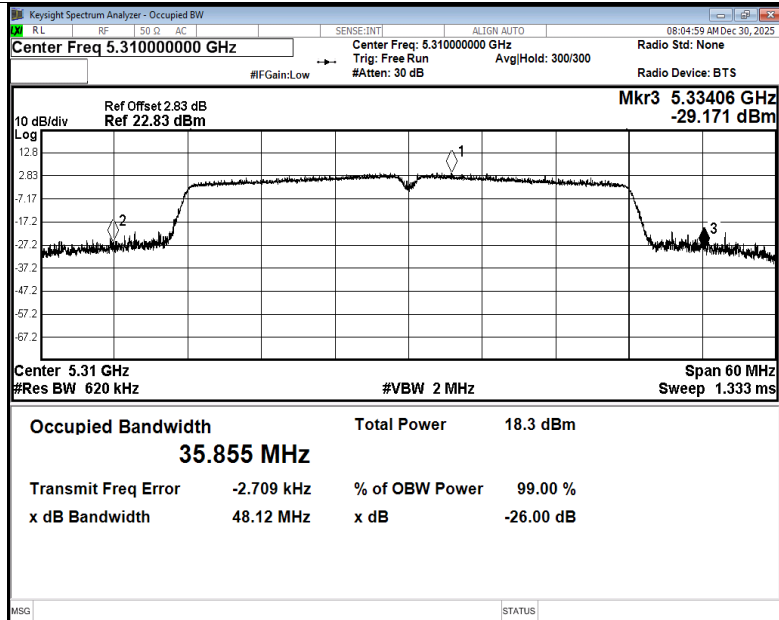

-26dB Bandwidth NVNT n40 5310MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

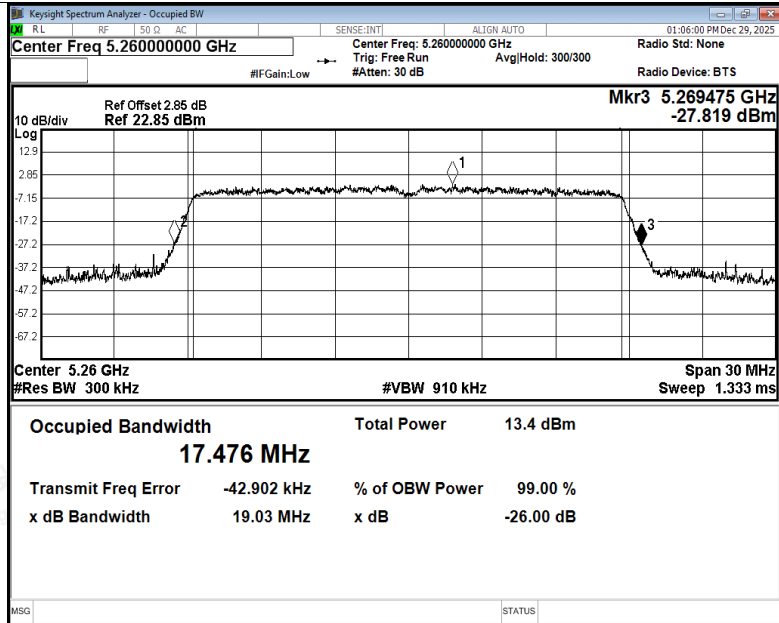

-26dB Bandwidth NVNT ac20 5260MHz Ant5

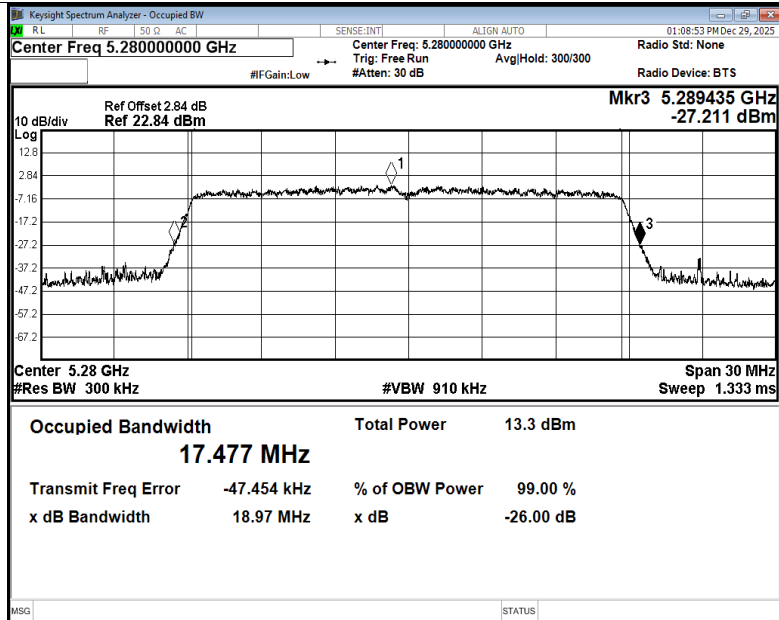

-26dB Bandwidth NVNT ac20 5280MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

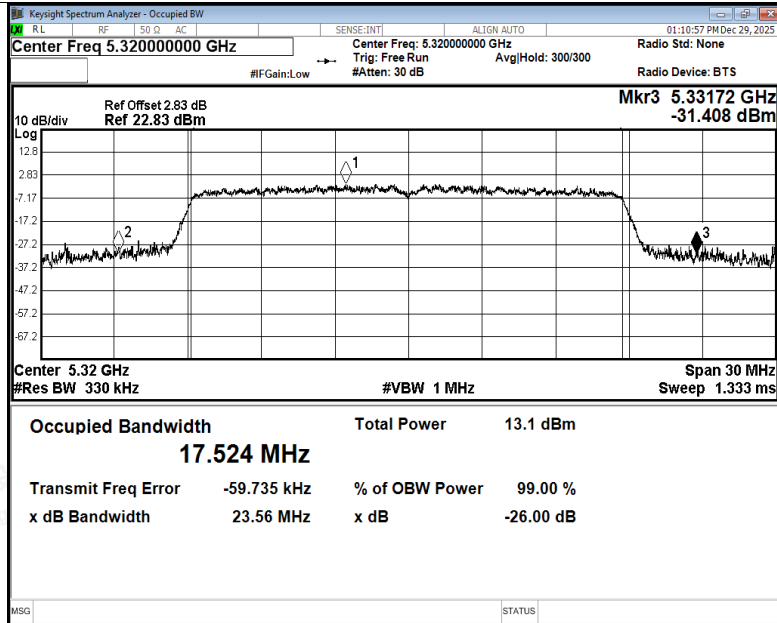

-26dB Bandwidth NVNT ac20 5320MHz Ant5

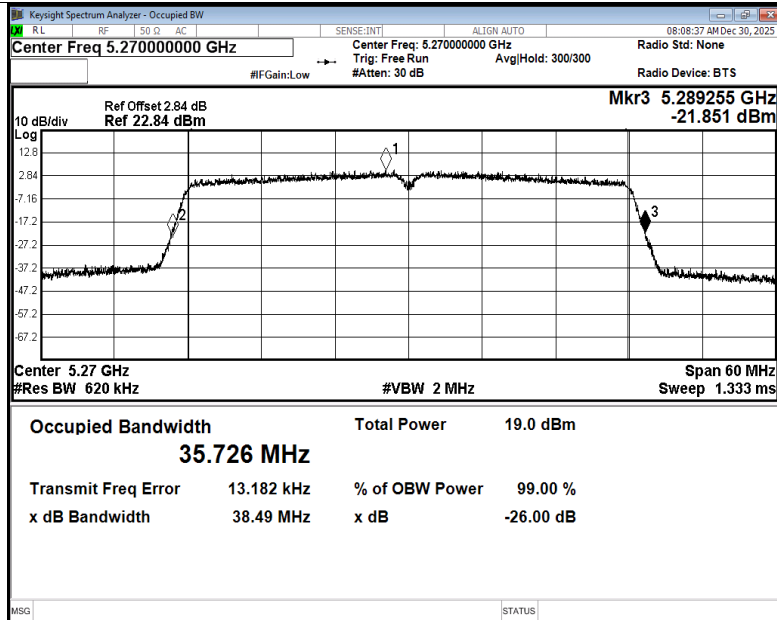

-26dB Bandwidth NVNT ac40 5270MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

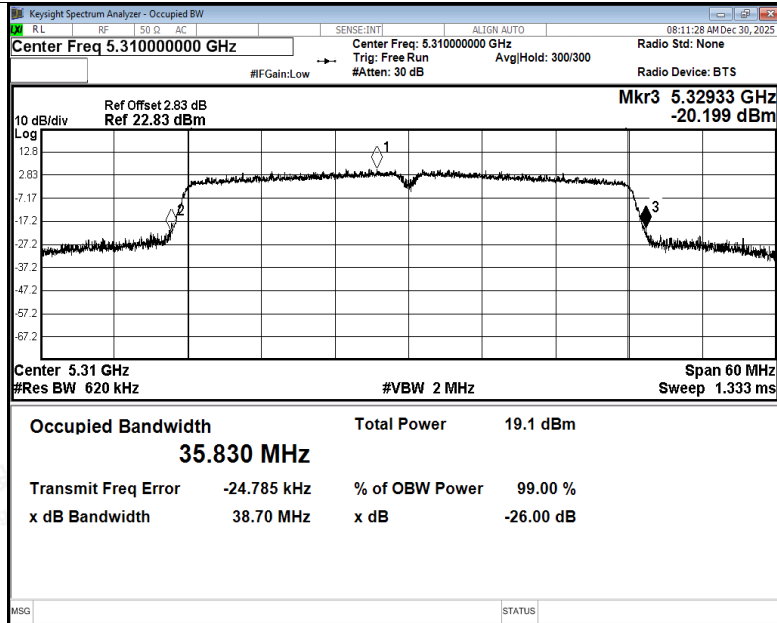

-26dB Bandwidth NVNT ac40 5310MHz Ant5

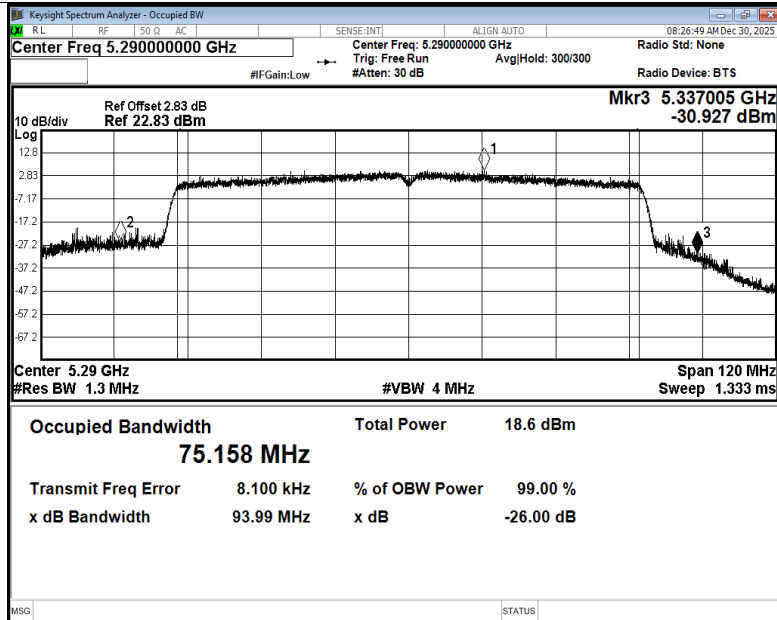

-26dB Bandwidth NVNT ac80 5290MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

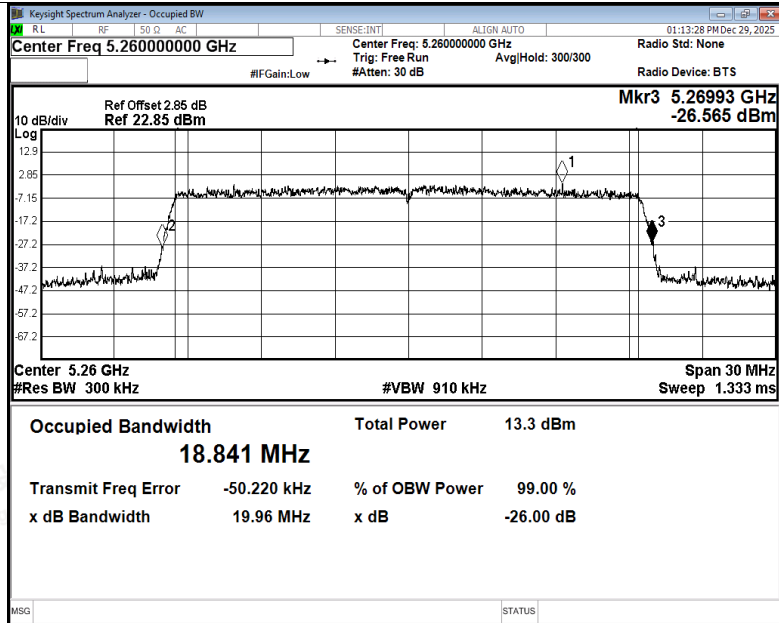

-26dB Bandwidth NVNT ax20 5260MHz Ant5

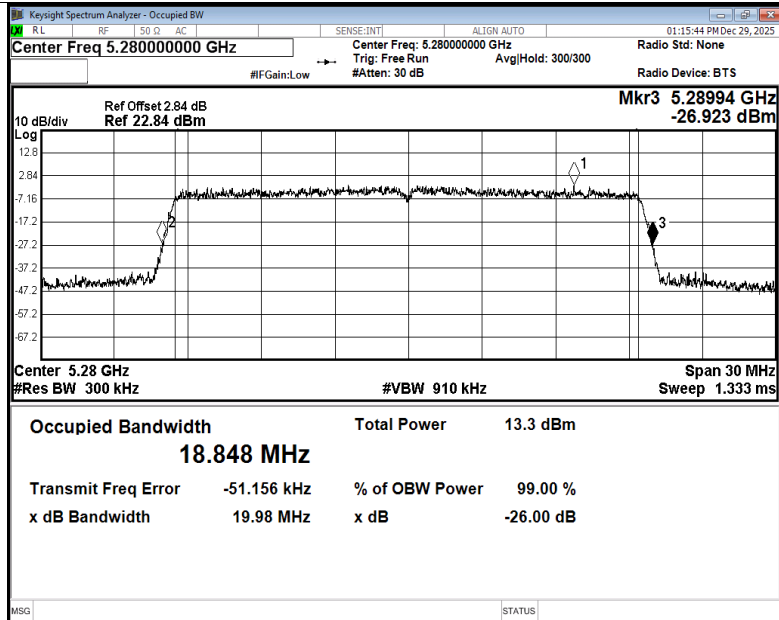

-26dB Bandwidth NVNT ax20 5280MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

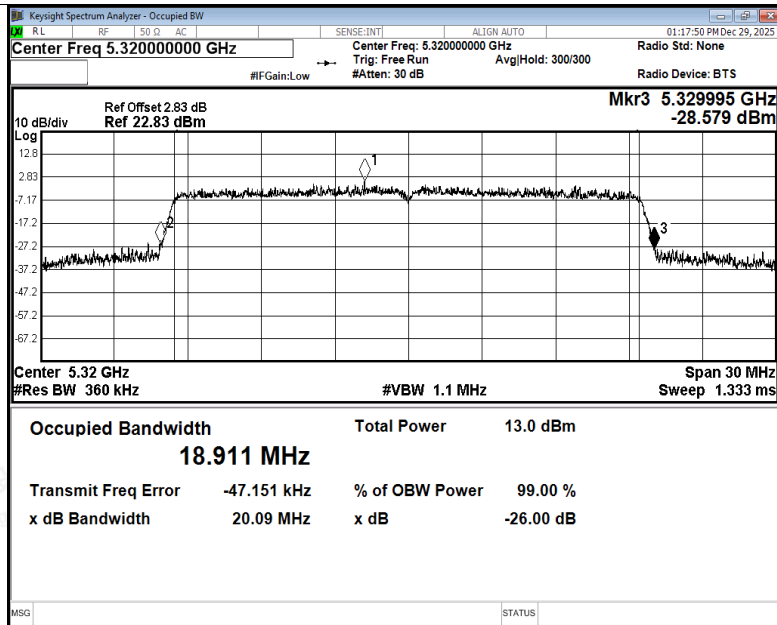

-26dB Bandwidth NVNT ax20 5320MHz Ant5

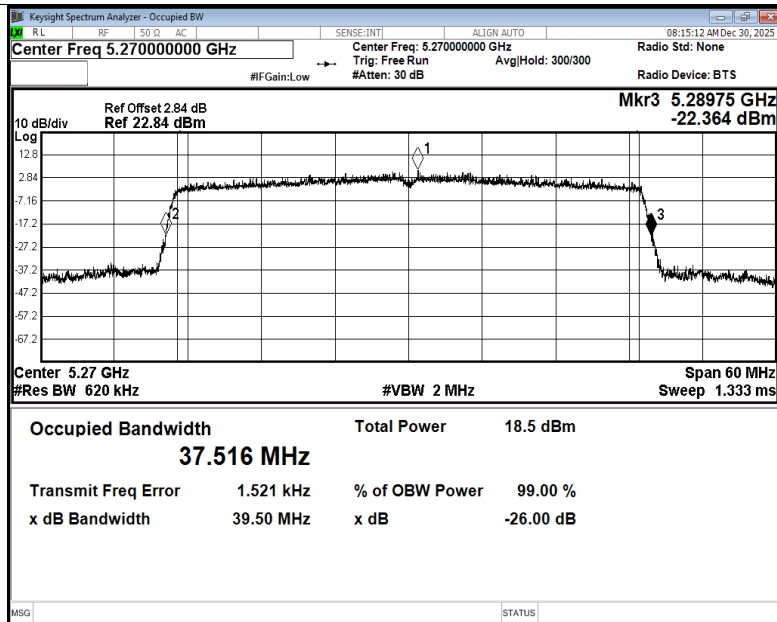

-26dB Bandwidth NVNT ax40 5270MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

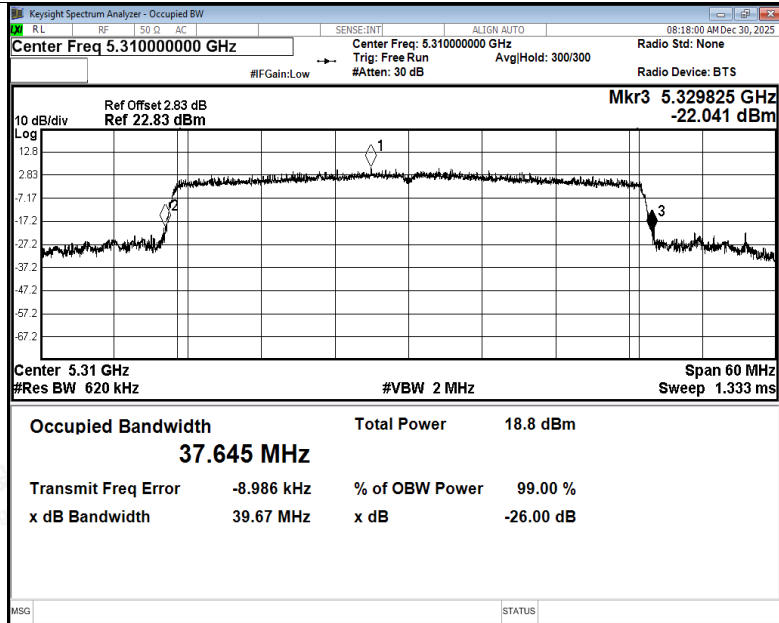

-26dB Bandwidth NVNT ax40 5310MHz Ant5

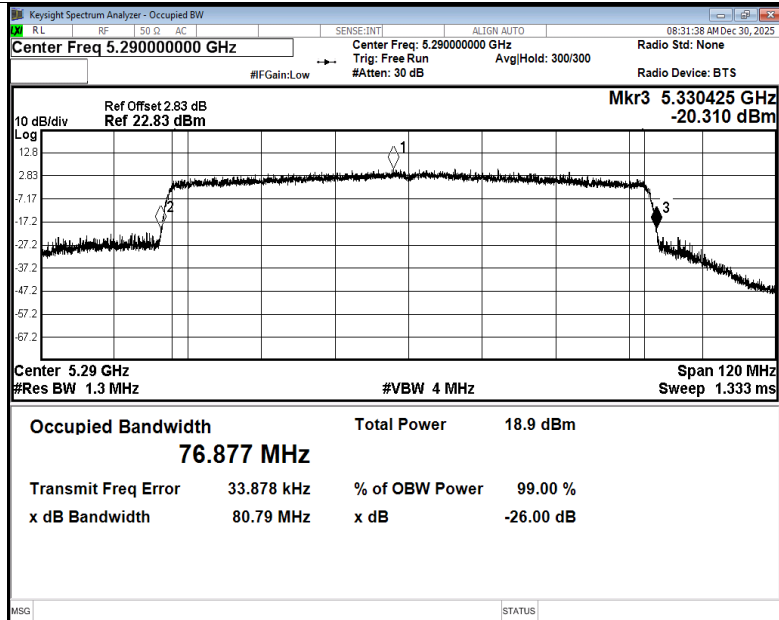

-26dB Bandwidth NVNT ax80 5290MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

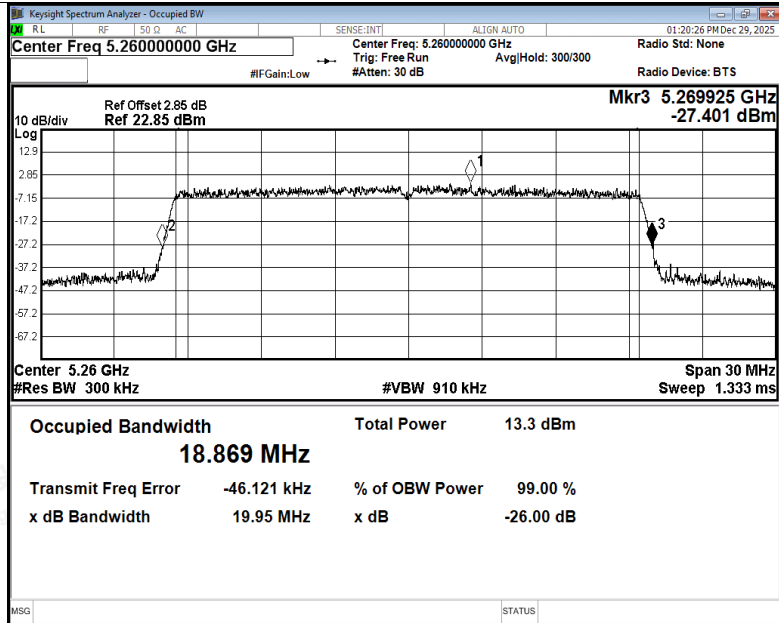

-26dB Bandwidth NVNT be20 5260MHz Ant5

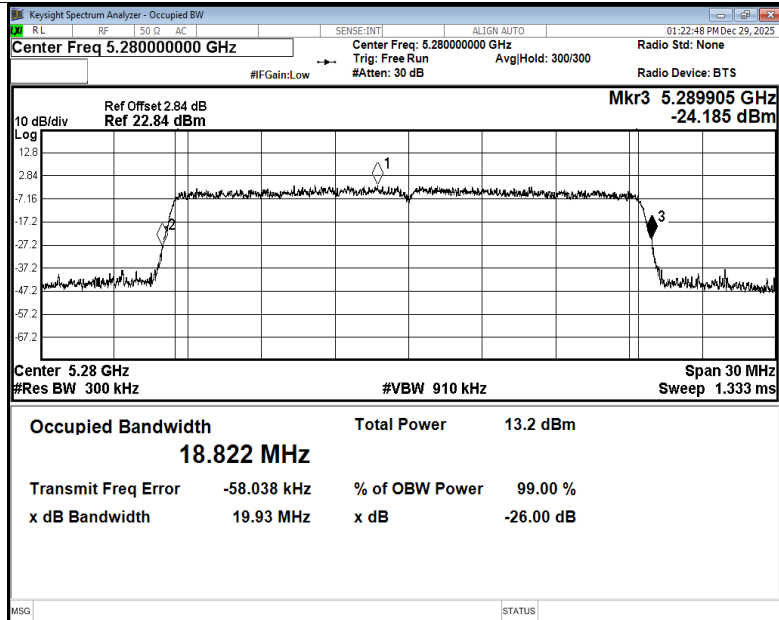

-26dB Bandwidth NVNT be20 5280MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

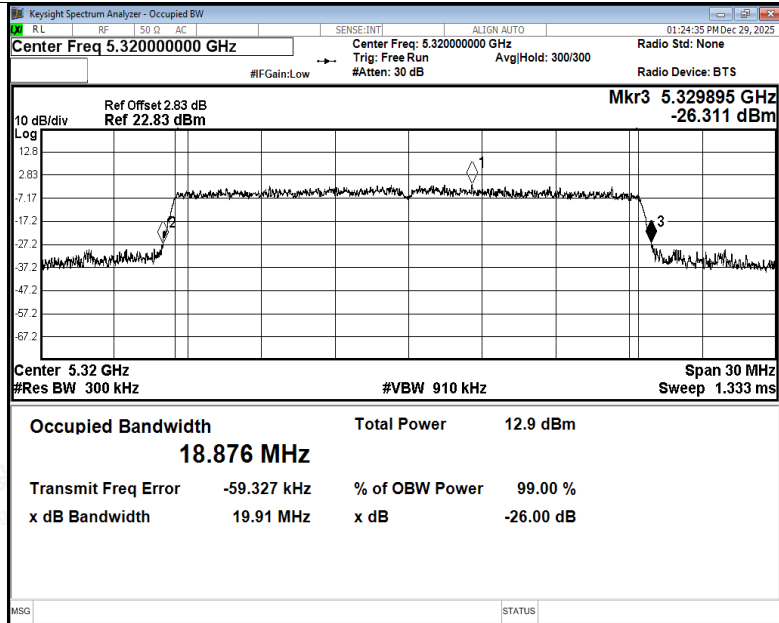

-26dB Bandwidth NVNT be20 5320MHz Ant5

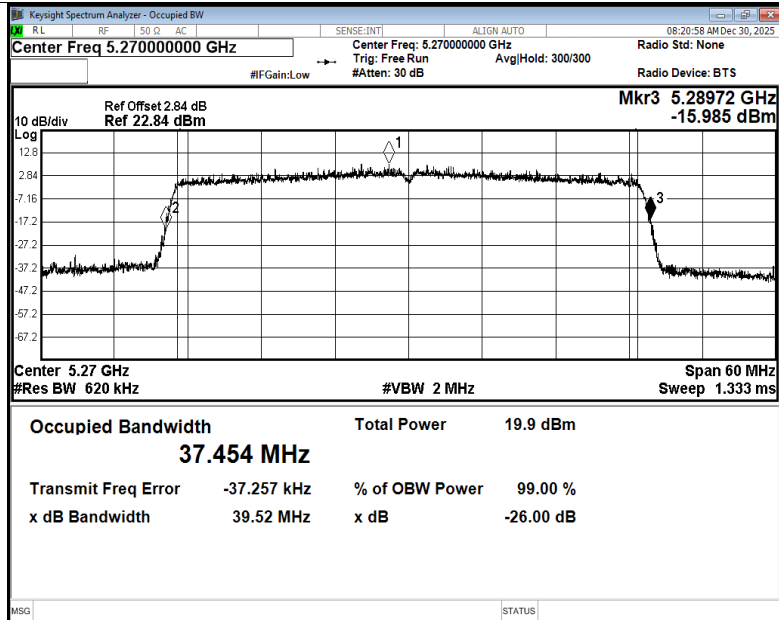

-26dB Bandwidth NVNT be40 5270MHz Ant5




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

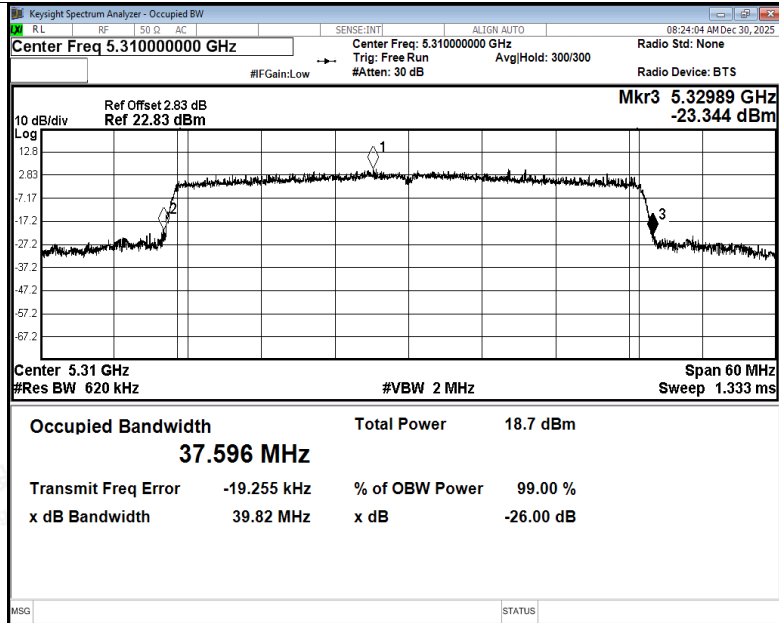

-26dB Bandwidth NVNT be40 5310MHz Ant5

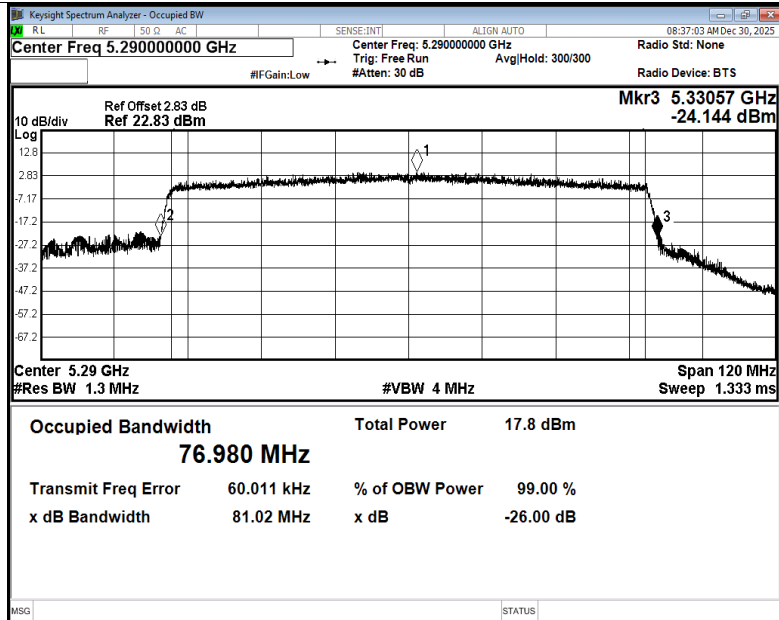

-26dB Bandwidth NVNT be80 5290MHz Ant5



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant1	10.41	0.15	10.56	23.4	Pass
NVNT	a	5280	Ant1	10.26	0.15	10.41	23.4	Pass
NVNT	a	5320	Ant1	9.37	0.15	9.52	23.4	Pass
NVNT	n20	5260	Ant1	8.87	0.16	9.03	23.4	Pass
NVNT	n20	5280	Ant1	8.67	0.2	8.87	23.4	Pass
NVNT	n20	5320	Ant1	7.79	0.17	7.96	23.4	Pass
NVNT	n40	5270	Ant1	8.5	0.39	8.89	23.4	Pass
NVNT	n40	5310	Ant1	7.85	0.33	8.18	23.4	Pass
NVNT	ac20	5260	Ant1	8.41	0.54	8.95	23.4	Pass
NVNT	ac20	5280	Ant1	8.22	0.65	8.87	23.4	Pass
NVNT	ac20	5320	Ant1	7.33	0.65	7.98	23.4	Pass
NVNT	ac40	5270	Ant1	8.57	0.26	8.83	23.4	Pass
NVNT	ac40	5310	Ant1	7.88	0.22	8.1	23.4	Pass
NVNT	ac80	5290	Ant1	6.59	0.4	6.99	23.4	Pass
NVNT	ax20	5260	Ant1	6.01	0.71	6.72	23.4	Pass
NVNT	ax20	5280	Ant1	5.84	0.81	6.65	23.4	Pass
NVNT	ax20	5320	Ant1	5.09	0.69	5.78	23.4	Pass
NVNT	ax40	5270	Ant1	6.38	0.2	6.58	23.4	Pass
NVNT	ax40	5310	Ant1	5.79	0.2	5.99	23.4	Pass
NVNT	ax80	5290	Ant1	5.64	0.6	6.24	23.4	Pass
NVNT	be20	5260	Ant1	5.97	0.69	6.66	23.4	Pass
NVNT	be20	5280	Ant1	5.91	0.56	6.47	23.4	Pass
NVNT	be20	5320	Ant1	5.21	0.58	5.79	23.4	Pass
NVNT	be40	5270	Ant1	5.77	0.56	6.33	23.4	Pass
NVNT	be40	5310	Ant1	5.32	0.67	5.99	23.4	Pass
NVNT	be80	5290	Ant1	3.42	0.69	4.11	23.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant2	8.37	0.15	8.52	23.4	Pass
NVNT	a	5280	Ant2	7.85	0.15	8	23.4	Pass
NVNT	a	5320	Ant2	6.56	0.15	6.71	23.4	Pass
NVNT	n20	5260	Ant2	6.88	0.2	7.08	23.4	Pass
NVNT	n20	5280	Ant2	6.34	0.16	6.5	23.4	Pass
NVNT	n20	5320	Ant2	5.07	0.17	5.24	23.4	Pass
NVNT	n40	5270	Ant2	5.34	0.46	5.8	23.4	Pass
NVNT	n40	5310	Ant2	4.16	0.4	4.56	23.4	Pass
NVNT	ac20	5260	Ant2	5.58	0.55	6.13	23.4	Pass
NVNT	ac20	5280	Ant2	5.07	0.55	5.62	23.4	Pass
NVNT	ac20	5320	Ant2	3.63	0.55	4.18	23.4	Pass
NVNT	ac40	5270	Ant2	4.7	1.14	5.84	23.4	Pass
NVNT	ac40	5310	Ant2	4.39	0.22	4.61	23.4	Pass
NVNT	ac80	5290	Ant2	4.99	0.34	5.33	23.4	Pass
NVNT	ax20	5260	Ant2	6.77	0.81	7.58	23.4	Pass
NVNT	ax20	5280	Ant2	6.4	0.14	6.54	23.4	Pass
NVNT	ax20	5320	Ant2	5.41	0.19	5.6	23.4	Pass
NVNT	ax40	5270	Ant2	6.9	0.23	7.13	23.4	Pass
NVNT	ax40	5310	Ant2	5.68	0.2	5.88	23.4	Pass
NVNT	ax80	5290	Ant2	4.27	0.6	4.87	23.4	Pass
NVNT	be20	5260	Ant2	4.8	0.56	5.36	23.4	Pass
NVNT	be20	5280	Ant2	4.26	0.58	4.84	23.4	Pass
NVNT	be20	5320	Ant2	4.89	0.56	5.45	23.4	Pass
NVNT	be40	5270	Ant2	5.31	0.19	5.5	23.4	Pass
NVNT	be40	5310	Ant2	4.26	0.23	4.49	23.4	Pass
NVNT	be80	5290	Ant2	4.42	0.43	4.85	23.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant3	9.74	0.15	9.89	23.4	Pass
NVNT	a	5280	Ant3	9.45	0.18	9.63	23.4	Pass
NVNT	a	5320	Ant3	9.09	0.18	9.27	23.4	Pass
NVNT	n20	5260	Ant3	7.46	0.16	7.62	23.4	Pass
NVNT	n20	5280	Ant3	7.32	0.16	7.48	23.4	Pass
NVNT	n20	5320	Ant3	7.13	0.2	7.33	23.4	Pass
NVNT	n40	5270	Ant3	5.89	0.33	6.22	23.4	Pass
NVNT	n40	5310	Ant3	5.91	0.33	6.24	23.4	Pass
NVNT	ac20	5260	Ant3	6.04	0.55	6.59	23.4	Pass
NVNT	ac20	5280	Ant3	5.98	0.64	6.62	23.4	Pass
NVNT	ac20	5320	Ant3	5.88	0.65	6.53	23.4	Pass
NVNT	ac40	5270	Ant3	6.01	0.38	6.39	23.4	Pass
NVNT	ac40	5310	Ant3	6.1	0.32	6.42	23.4	Pass
NVNT	ac80	5290	Ant3	5.35	0.4	5.75	23.4	Pass
NVNT	ax20	5260	Ant3	6.26	0.69	6.95	23.4	Pass
NVNT	ax20	5280	Ant3	6.21	0.58	6.79	23.4	Pass
NVNT	ax20	5320	Ant3	6.11	0.58	6.69	23.4	Pass
NVNT	ax40	5270	Ant3	6.07	0.69	6.76	23.4	Pass
NVNT	ax40	5310	Ant3	5.99	0.69	6.68	23.4	Pass
NVNT	ax80	5290	Ant3	5.48	0.5	5.98	23.4	Pass
NVNT	be20	5260	Ant3	6.28	0.69	6.97	23.4	Pass
NVNT	be20	5280	Ant3	6.21	0.67	6.88	23.4	Pass
NVNT	be20	5320	Ant3	6.07	0.56	6.63	23.4	Pass
NVNT	be40	5270	Ant3	6.5	0.2	6.7	23.4	Pass
NVNT	be40	5310	Ant3	6.4	0.2	6.6	23.4	Pass
NVNT	be80	5290	Ant3	6.3	0.5	6.8	23.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant4	8.74	0.18	8.92	23.4	Pass
NVNT	a	5280	Ant4	8.55	0.18	8.73	23.4	Pass
NVNT	a	5320	Ant4	8.23	0.15	8.38	23.4	Pass
NVNT	n20	5260	Ant4	7.21	0.23	7.44	23.4	Pass
NVNT	n20	5280	Ant4	7.08	0.2	7.28	23.4	Pass
NVNT	n20	5320	Ant4	6.72	0.16	6.88	23.4	Pass
NVNT	n40	5270	Ant4	6.76	0.33	7.09	23.4	Pass
NVNT	n40	5310	Ant4	6.55	0.39	6.94	23.4	Pass
NVNT	ac20	5260	Ant4	7.09	0.55	7.64	23.4	Pass
NVNT	ac20	5280	Ant4	6.86	0.55	7.41	23.4	Pass
NVNT	ac20	5320	Ant4	6.49	0.54	7.03	23.4	Pass
NVNT	ac40	5270	Ant4	5.33	1.09	6.42	23.4	Pass
NVNT	ac40	5310	Ant4	5.89	0.2	6.09	23.4	Pass
NVNT	ac80	5290	Ant4	6	0.33	6.33	23.4	Pass
NVNT	ax20	5260	Ant4	7.21	0.81	8.02	23.4	Pass
NVNT	ax20	5280	Ant4	7.03	0.71	7.74	23.4	Pass
NVNT	ax20	5320	Ant4	6.6	0.69	7.29	23.4	Pass
NVNT	ax40	5270	Ant4	6.08	0.69	6.77	23.4	Pass
NVNT	ax40	5310	Ant4	5.68	0.58	6.26	23.4	Pass
NVNT	ax80	5290	Ant4	6.34	0.5	6.84	23.4	Pass
NVNT	be20	5260	Ant4	6.2	0.69	6.89	23.4	Pass
NVNT	be20	5280	Ant4	6.04	0.69	6.73	23.4	Pass
NVNT	be20	5320	Ant4	5.64	0.58	6.22	23.4	Pass
NVNT	be40	5270	Ant4	6.4	0.19	6.59	23.4	Pass
NVNT	be40	5310	Ant4	6.23	0.19	6.42	23.4	Pass
NVNT	be80	5290	Ant4	6.17	0.43	6.6	23.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant5	8.3	0.15	8.45	23.47	Pass
NVNT	a	5280	Ant5	8.12	0.18	8.3	23.47	Pass
NVNT	a	5320	Ant5	7.88	0.15	8.03	23.47	Pass
NVNT	n20	5260	Ant5	6.68	0.16	6.84	23.47	Pass
NVNT	n20	5280	Ant5	6.53	0.2	6.73	23.47	Pass
NVNT	n20	5320	Ant5	6.25	0.2	6.45	23.47	Pass
NVNT	n40	5270	Ant5	11.97	0.11	12.08	23.47	Pass
NVNT	n40	5310	Ant5	11.94	0.11	12.05	23.47	Pass
NVNT	ac20	5260	Ant5	6.94	0.16	7.1	23.47	Pass
NVNT	ac20	5280	Ant5	6.82	0.2	7.02	23.47	Pass
NVNT	ac20	5320	Ant5	6.41	0.16	6.57	23.47	Pass
NVNT	ac40	5270	Ant5	12.07	0.17	12.24	23.47	Pass
NVNT	ac40	5310	Ant5	8.46	0.17	8.63	23.47	Pass
NVNT	ac80	5290	Ant5	10.76	0.4	11.16	23.47	Pass
NVNT	ax20	5260	Ant5	5.61	0.71	6.32	23.47	Pass
NVNT	ax20	5280	Ant5	5.56	0.58	6.14	23.47	Pass
NVNT	ax20	5320	Ant5	5.17	0.58	5.75	23.47	Pass
NVNT	ax40	5270	Ant5	10.43	0.69	11.12	23.47	Pass
NVNT	ax40	5310	Ant5	10.82	0.58	11.4	23.47	Pass
NVNT	ax80	5290	Ant5	8.52	0.37	8.89	23.47	Pass
NVNT	be20	5260	Ant5	5.65	0.56	6.21	23.47	Pass
NVNT	be20	5280	Ant5	5.53	0.69	6.22	23.47	Pass
NVNT	be20	5320	Ant5	5.22	0.56	5.78	23.47	Pass
NVNT	be40	5270	Ant5	11.84	0.67	12.51	23.47	Pass
NVNT	be40	5310	Ant5	10.74	0.67	11.41	23.47	Pass
NVNT	be80	5290	Ant5	9.52	0.69	10.21	23.47	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)						Limit (dBm)	Verdict
			Ant1	Ant2	Ant3	Ant4	Ant5	Ant1+Ant2+Ant3+Ant4+Ant5		
NVNT	n20	5260	9.03	7.08	7.62	7.44	6.84	14.66	16.41	Pass
NVNT	n20	5280	8.87	6.5	7.48	7.28	6.73	14.44	16.41	Pass
NVNT	n20	5320	7.96	5.24	7.33	6.88	6.45	13.85	16.41	Pass
NVNT	n40	5270	8.89	5.8	6.22	7.09	12.08	15.68	16.41	Pass
NVNT	n40	5310	8.18	4.56	6.24	6.94	12.05	15.39	16.41	Pass
NVNT	ac20	5260	8.95	6.13	6.59	7.64	7.1	14.39	16.41	Pass
NVNT	ac20	5280	8.87	5.62	6.62	7.41	7.02	14.23	16.41	Pass
NVNT	ac20	5320	7.98	4.18	6.53	7.03	6.57	13.61	16.41	Pass
NVNT	ac40	5270	8.83	5.84	6.39	6.42	12.24	15.68	16.41	Pass
NVNT	ac40	5310	8.1	4.61	6.42	6.09	8.63	14.00	16.41	Pass
NVNT	ac80	5290	6.99	5.33	5.75	6.33	11.16	14.70	16.41	Pass
NVNT	ax20	5260	6.72	7.58	6.95	8.02	6.32	14.15	16.41	Pass
NVNT	ax20	5280	6.65	6.54	6.79	7.74	6.14	13.80	16.41	Pass
NVNT	ax20	5320	5.78	5.6	6.69	7.29	5.75	13.26	16.41	Pass
NVNT	ax40	5270	6.58	7.13	6.76	6.77	11.12	15.07	16.41	Pass
NVNT	ax40	5310	5.99	5.88	6.68	6.26	11.4	14.85	16.41	Pass
NVNT	ax80	5290	6.24	4.87	5.98	6.84	8.89	13.77	16.41	Pass
NVNT	be20	5260	6.66	5.36	6.97	6.89	6.21	13.45	16.41	Pass
NVNT	be20	5280	6.47	4.84	6.88	6.73	6.22	13.28	16.41	Pass
NVNT	be20	5320	5.79	5.45	6.63	6.22	5.78	12.98	16.41	Pass
NVNT	be40	5270	6.33	5.5	6.7	6.59	12.51	15.43	16.41	Pass
NVNT	be40	5310	5.99	4.49	6.6	6.42	11.41	14.71	16.41	Pass
NVNT	be80	5290	4.11	4.85	6.8	6.6	10.21	14.06	16.41	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total Conducted PSD (dBm/MHz)	Limit Conducted (dBm/MHz)	Verdict
NVNT	a	5260	Ant1	-0.44	0.15	-0.29	10.4	Pass
NVNT	a	5280	Ant1	-0.56	0.15	-0.41	10.4	Pass
NVNT	a	5320	Ant1	-1.42	0.15	-1.27	10.4	Pass
NVNT	n20	5260	Ant1	-3.32	0.16	-3.16	10.4	Pass
NVNT	n20	5280	Ant1	-3.38	0.2	-3.18	10.4	Pass
NVNT	n20	5320	Ant1	-3.36	0.17	-3.19	10.4	Pass
NVNT	n40	5270	Ant1	-4.79	0.39	-4.4	10.4	Pass
NVNT	n40	5310	Ant1	-5.58	0.33	-5.25	10.4	Pass
NVNT	ac20	5260	Ant1	-2.62	0.54	-2.08	10.4	Pass
NVNT	ac20	5280	Ant1	-2.75	0.65	-2.1	10.4	Pass
NVNT	ac20	5320	Ant1	-3.64	0.65	-2.99	10.4	Pass
NVNT	ac40	5270	Ant1	-4.93	0.26	-4.67	10.4	Pass
NVNT	ac40	5310	Ant1	-5.12	0.22	-4.9	10.4	Pass
NVNT	ac80	5290	Ant1	-10.03	0.4	-9.63	10.4	Pass
NVNT	ax20	5260	Ant1	-5.2	0.71	-4.49	10.4	Pass
NVNT	ax20	5280	Ant1	-5.15	0.81	-4.34	10.4	Pass
NVNT	ax20	5320	Ant1	-6.29	0.69	-5.6	10.4	Pass
NVNT	ax40	5270	Ant1	-6.81	0.2	-6.61	10.4	Pass
NVNT	ax40	5310	Ant1	-7.68	0.2	-7.48	10.4	Pass
NVNT	ax80	5290	Ant1	-10.87	0.6	-10.27	10.4	Pass
NVNT	be20	5260	Ant1	-5.18	0.69	-4.49	10.4	Pass
NVNT	be20	5280	Ant1	-5.3	0.56	-4.74	10.4	Pass
NVNT	be20	5320	Ant1	-5.97	0.58	-5.39	10.4	Pass
NVNT	be40	5270	Ant1	-7.59	0.56	-7.03	10.4	Pass
NVNT	be40	5310	Ant1	-8.14	0.67	-7.47	10.4	Pass
NVNT	be80	5290	Ant1	-13.11	0.69	-12.42	10.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total Conducted PSD (dBm/MHz)	Limit Conducted (dBm/MHz)	Verdict
NVNT	a	5260	Ant2	-2.39	0.15	-2.24	10.4	Pass
NVNT	a	5280	Ant2	-3.02	0.15	-2.87	10.4	Pass
NVNT	a	5320	Ant2	-4.16	0.15	-4.01	10.4	Pass
NVNT	n20	5260	Ant2	-4.11	0.2	-3.91	10.4	Pass
NVNT	n20	5280	Ant2	-4.75	0.16	-4.59	10.4	Pass
NVNT	n20	5320	Ant2	-5.97	0.17	-5.8	10.4	Pass
NVNT	n40	5270	Ant2	-7.92	0.46	-7.46	10.4	Pass
NVNT	n40	5310	Ant2	-9.09	0.4	-8.69	10.4	Pass
NVNT	ac20	5260	Ant2	-5.49	0.55	-4.94	10.4	Pass
NVNT	ac20	5280	Ant2	-5.79	0.55	-5.24	10.4	Pass
NVNT	ac20	5320	Ant2	-7.12	0.55	-6.57	10.4	Pass
NVNT	ac40	5270	Ant2	-8.68	1.14	-7.54	10.4	Pass
NVNT	ac40	5310	Ant2	-8.84	0.22	-8.62	10.4	Pass
NVNT	ac80	5290	Ant2	-11.48	0.34	-11.14	10.4	Pass
NVNT	ax20	5260	Ant2	-4.51	0.81	-3.7	10.4	Pass
NVNT	ax20	5280	Ant2	-4.78	0.14	-4.64	10.4	Pass
NVNT	ax20	5320	Ant2	-5.84	0.19	-5.65	10.4	Pass
NVNT	ax40	5270	Ant2	-6.49	0.23	-6.26	10.4	Pass
NVNT	ax40	5310	Ant2	-7.71	0.2	-7.51	10.4	Pass
NVNT	ax80	5290	Ant2	-12.21	0.6	-11.61	10.4	Pass
NVNT	be20	5260	Ant2	-6.38	0.56	-5.82	10.4	Pass
NVNT	be20	5280	Ant2	-6.93	0.58	-6.35	10.4	Pass
NVNT	be20	5320	Ant2	-8.27	0.56	-7.71	10.4	Pass
NVNT	be40	5270	Ant2	-8.29	0.19	-8.1	10.4	Pass
NVNT	be40	5310	Ant2	-9.09	0.23	-8.86	10.4	Pass
NVNT	be80	5290	Ant2	-12.31	0.43	-11.88	10.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total Conducted PSD (dBm/MHz)	Limit Conducted (dBm/MHz)	Verdict
NVNT	a	5260	Ant3	-1.25	0.15	-1.1	10.4	Pass
NVNT	a	5280	Ant3	-1.23	0.18	-1.05	10.4	Pass
NVNT	a	5320	Ant3	-1.61	0.18	-1.43	10.4	Pass
NVNT	n20	5260	Ant3	-3.69	0.16	-3.53	10.4	Pass
NVNT	n20	5280	Ant3	-3.62	0.16	-3.46	10.4	Pass
NVNT	n20	5320	Ant3	-4.04	0.2	-3.84	10.4	Pass
NVNT	n40	5270	Ant3	-7.42	0.33	-7.09	10.4	Pass
NVNT	n40	5310	Ant3	-7.09	0.33	-6.76	10.4	Pass
NVNT	ac20	5260	Ant3	-4.95	0.55	-4.4	10.4	Pass
NVNT	ac20	5280	Ant3	-4.91	0.64	-4.27	10.4	Pass
NVNT	ac20	5320	Ant3	-5.15	0.65	-4.5	10.4	Pass
NVNT	ac40	5270	Ant3	-7.3	0.38	-6.92	10.4	Pass
NVNT	ac40	5310	Ant3	-7.25	0.32	-6.93	10.4	Pass
NVNT	ac80	5290	Ant3	-11.13	0.4	-10.73	10.4	Pass
NVNT	ax20	5260	Ant3	-4.81	0.69	-4.12	10.4	Pass
NVNT	ax20	5280	Ant3	-4.92	0.58	-4.34	10.4	Pass
NVNT	ax20	5320	Ant3	-5.16	0.58	-4.58	10.4	Pass
NVNT	ax40	5270	Ant3	-7.43	0.69	-6.74	10.4	Pass
NVNT	ax40	5310	Ant3	-7.41	0.69	-6.72	10.4	Pass
NVNT	ax80	5290	Ant3	-10.99	0.5	-10.49	10.4	Pass
NVNT	be20	5260	Ant3	-4.73	0.69	-4.04	10.4	Pass
NVNT	be20	5280	Ant3	-5.1	0.67	-4.43	10.4	Pass
NVNT	be20	5320	Ant3	-5.05	0.56	-4.49	10.4	Pass
NVNT	be40	5270	Ant3	-7.07	0.2	-6.87	10.4	Pass
NVNT	be40	5310	Ant3	-6.89	0.2	-6.69	10.4	Pass
NVNT	be80	5290	Ant3	-10.24	0.5	-9.74	10.4	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity