



Appendix A. Test Result of AC Power Line Conducted Emission

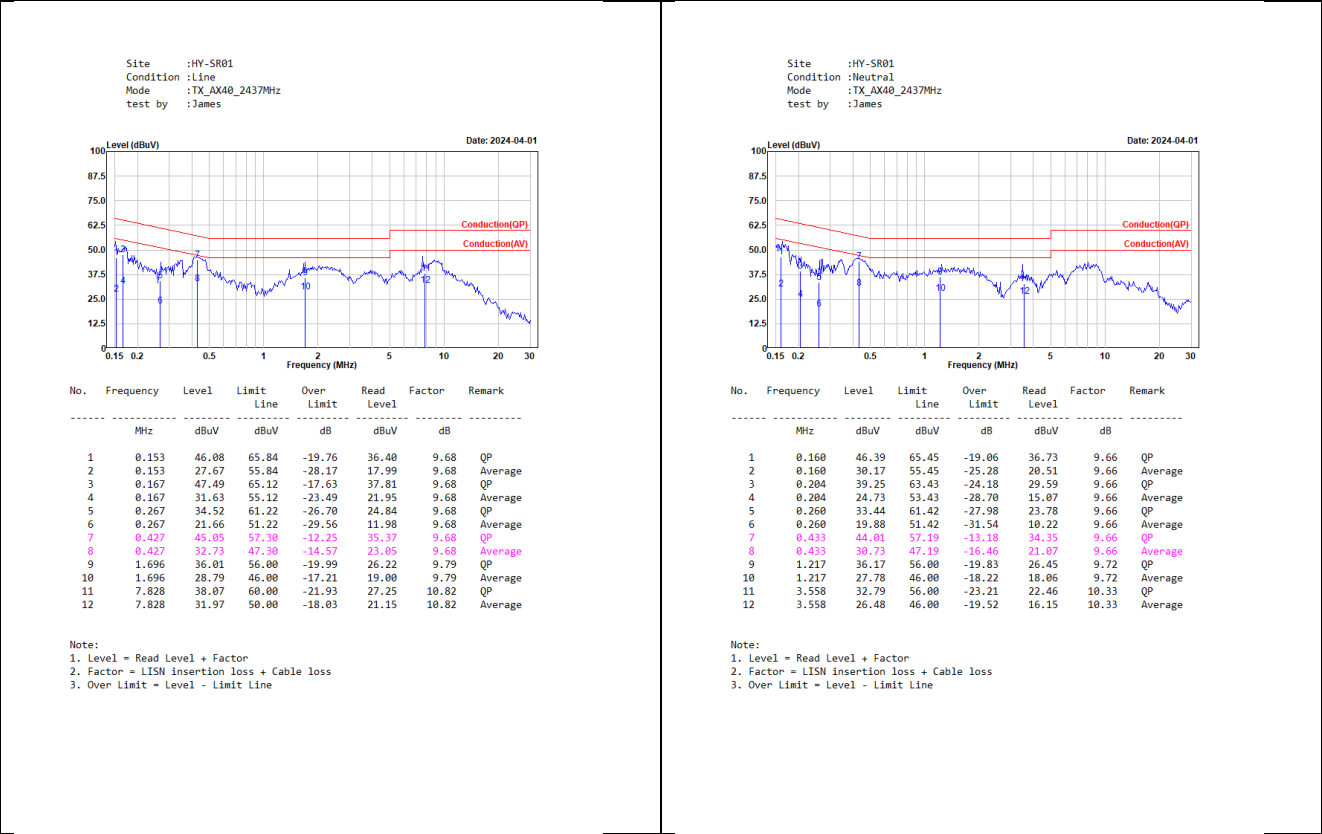


Appendix B. 6 dB Bandwidth

Modulation	Chain	Frequency (MHz)	Measured Value (kHz)	Required Limit (kHz)	Result
802.11b	A	2412	8032	>500	Pass
		2437	8551	>500	Pass
		2462	8072	>500	Pass
	B	2412	8072	>500	Pass
		2437	8072	>500	Pass
		2462	7552	>500	Pass
802.11g	A	2412	16304	>500	Pass
		2437	16304	>500	Pass
		2462	16304	>500	Pass
	B	2412	16264	>500	Pass
		2437	15704	>500	Pass
		2462	16304	>500	Pass
802.11ax (20 MHz)	A	2412	18781	>500	Pass
		2437	18262	>500	Pass
		2462	18062	>500	Pass
	B	2412	19061	>500	Pass
		2437	18342	>500	Pass
		2462	15185	>500	Pass
802.11ax (40 MHz)	A	2422	35085	>500	Pass
		2437	35085	>500	Pass
		2452	35005	>500	Pass
	B	2422	37403	>500	Pass
		2437	35085	>500	Pass
		2452	35564	>500	Pass


802.11b / 2462MHz / Chain B

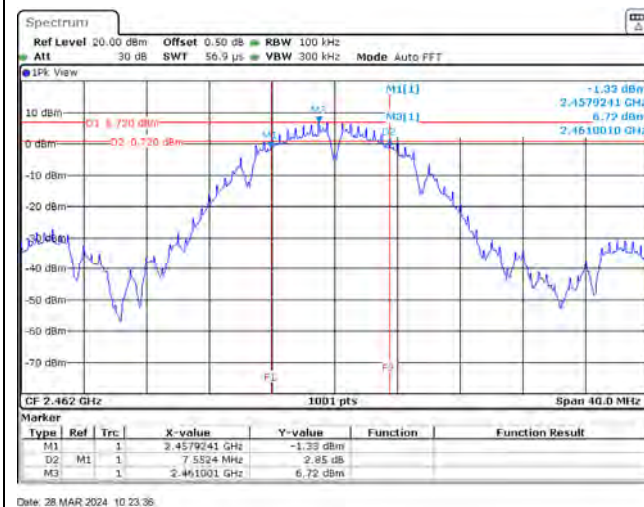


802.11g / 2437MHz / Chain B

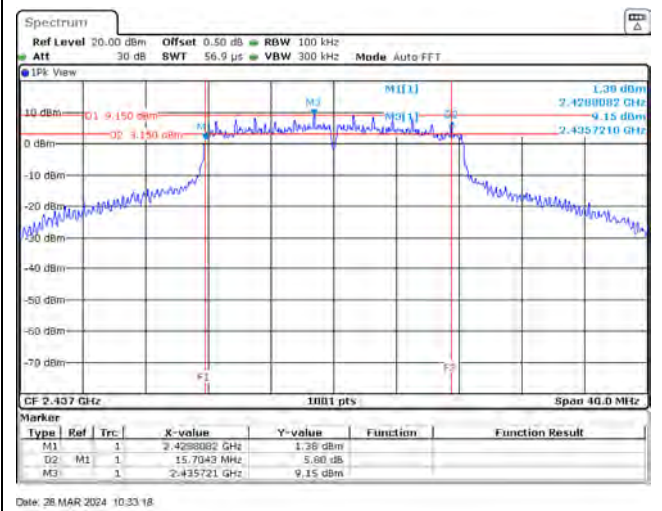

802.11ax (20 MHz) / 2462MHz / Chain B

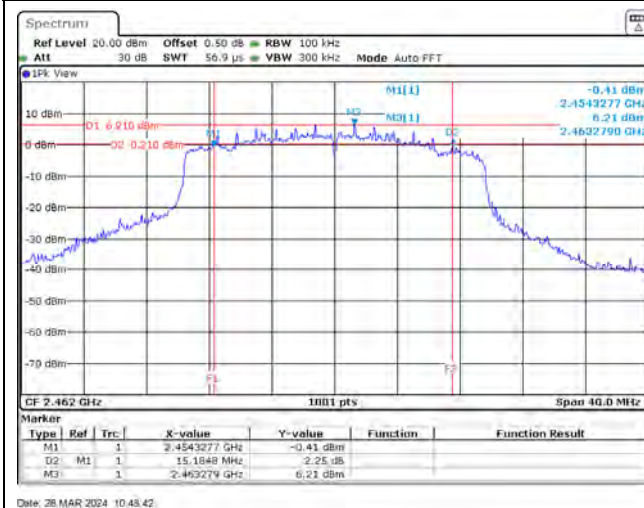

802.11ax (40 MHz) / 2452MHz / Chain A

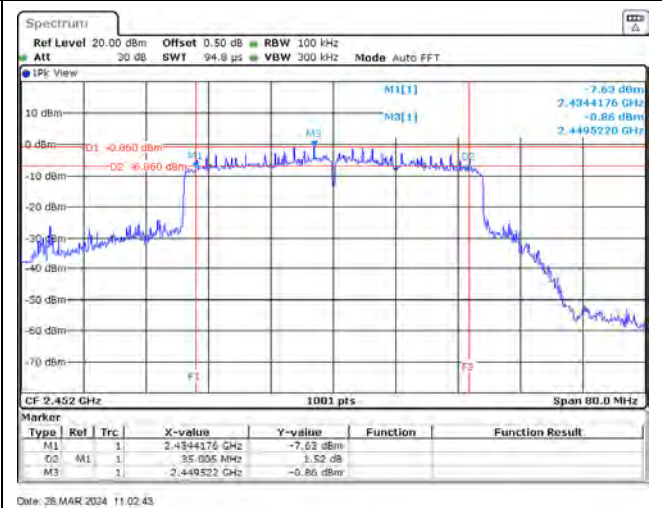

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	2412	15.72	15.95	18.85	<30	Pass
	2437	16.35	16.03	19.20	<30	Pass
	2462	15.34	15.86	18.62	<30	Pass
802.11g	2412	16.66	16.96	19.82	<30	Pass
	2437	20.96	20.64	23.81	<30	Pass
	2462	18.07	18.43	21.26	<30	Pass
802.11ax (20 MHz)	2412	15.98	16.22	19.11	<30	Pass
	2437	20.66	20.34	23.51	<30	Pass
	2462	17.13	17.51	20.33	<30	Pass
802.11ax (40 MHz)	2422	14.85	15.26	18.07	<30	Pass
	2437	17.39	17.22	20.32	<30	Pass
	2452	13.67	13.55	16.62	<30	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Beamforming

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	12.97	13.21	16.10	<30	Pass
	2437	17.65	17.33	20.50	<30	Pass
	2462	14.12	14.50	17.32	<30	Pass
802.11ax (40 MHz)	2422	11.84	12.25	15.06	<30	Pass
	2437	14.38	14.21	17.31	<30	Pass
	2452	10.66	10.54	13.61	<30	Pass


Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Chain	Measured Value (dBm)	Duty factor (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11b	2412	A	-11.810	0.000	-8.446	≤ 8	Pass
		B	-11.130				
	2437	A	-11.070	0.000	-8.030	≤ 8	Pass
		B	-11.010				
	2462	A	-11.700	0.000	-8.422	≤ 8	Pass
		B	-11.180				
802.11g	2412	A	-13.110	0.201	-9.673	≤ 8	Pass
		B	-12.670				
	2437	A	-8.520	0.201	-5.427	≤ 8	Pass
		B	-8.760				
	2462	A	-10.360	0.201	-7.507	≤ 8	Pass
		B	-11.110				
802.11ax (20 MHz)	2412	A	-15.110	0.248	-11.17	≤ 8	Pass
		B	-13.840				
	2437	A	-10.260	0.248	-6.95	≤ 8	Pass
		B	-10.160				
	2462	A	-13.510	0.248	-9.89	≤ 8	Pass
		B	-12.820				
802.11ax (40 MHz)	2422	A	-18.290	0.455	-14.26	≤ 8	Pass
		B	-17.230				
	2437	A	-14.600	0.455	-11.45	≤ 8	Pass
		B	-15.260				
	2452	A	-18.360	0.455	-15.37	≤ 8	Pass
		B	-19.360				

Note: Total PSD = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.


802.11b / 2437MHz / Chain B

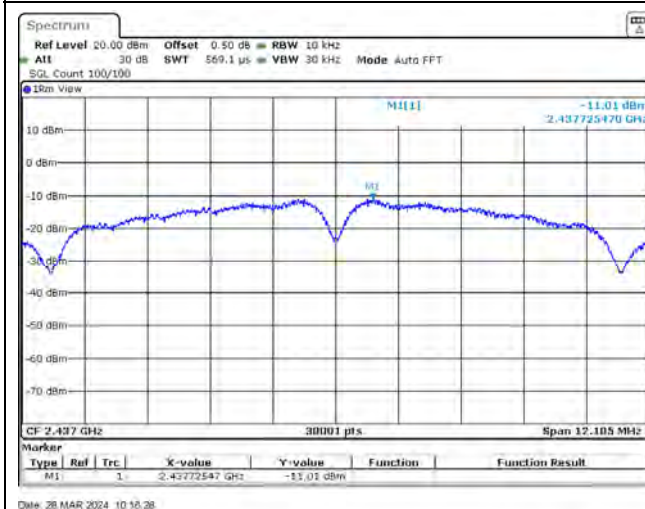


802.11g / 2437MHz / Chain A

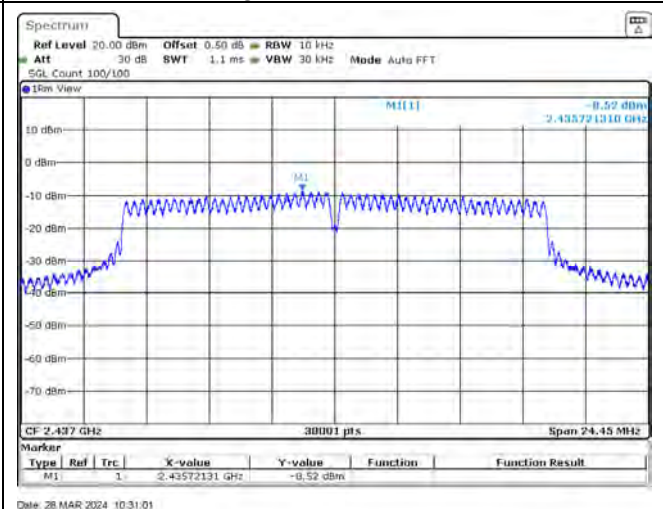


802.11ax (20 MHz) / 2437MHz / Chain B

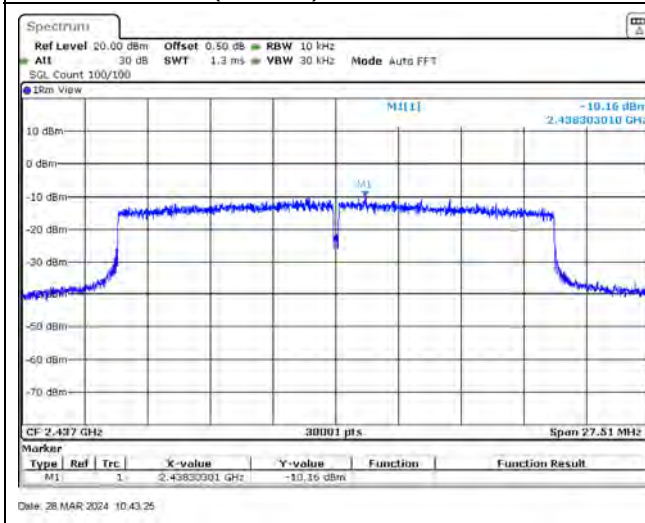


802.11ax (40 MHz) / 2437MHz / Chain A

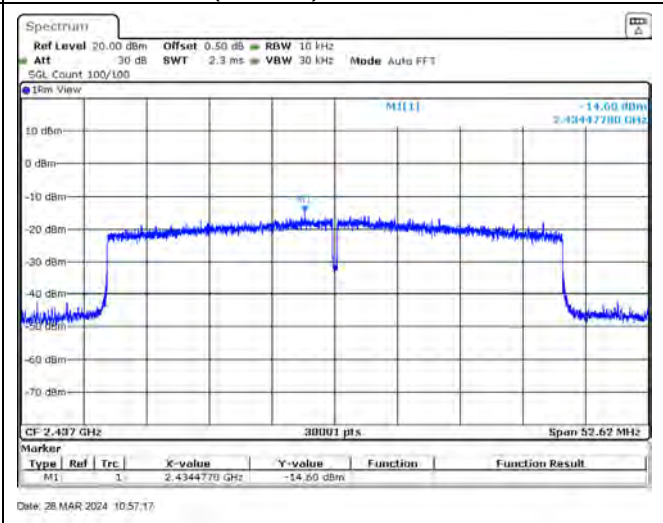

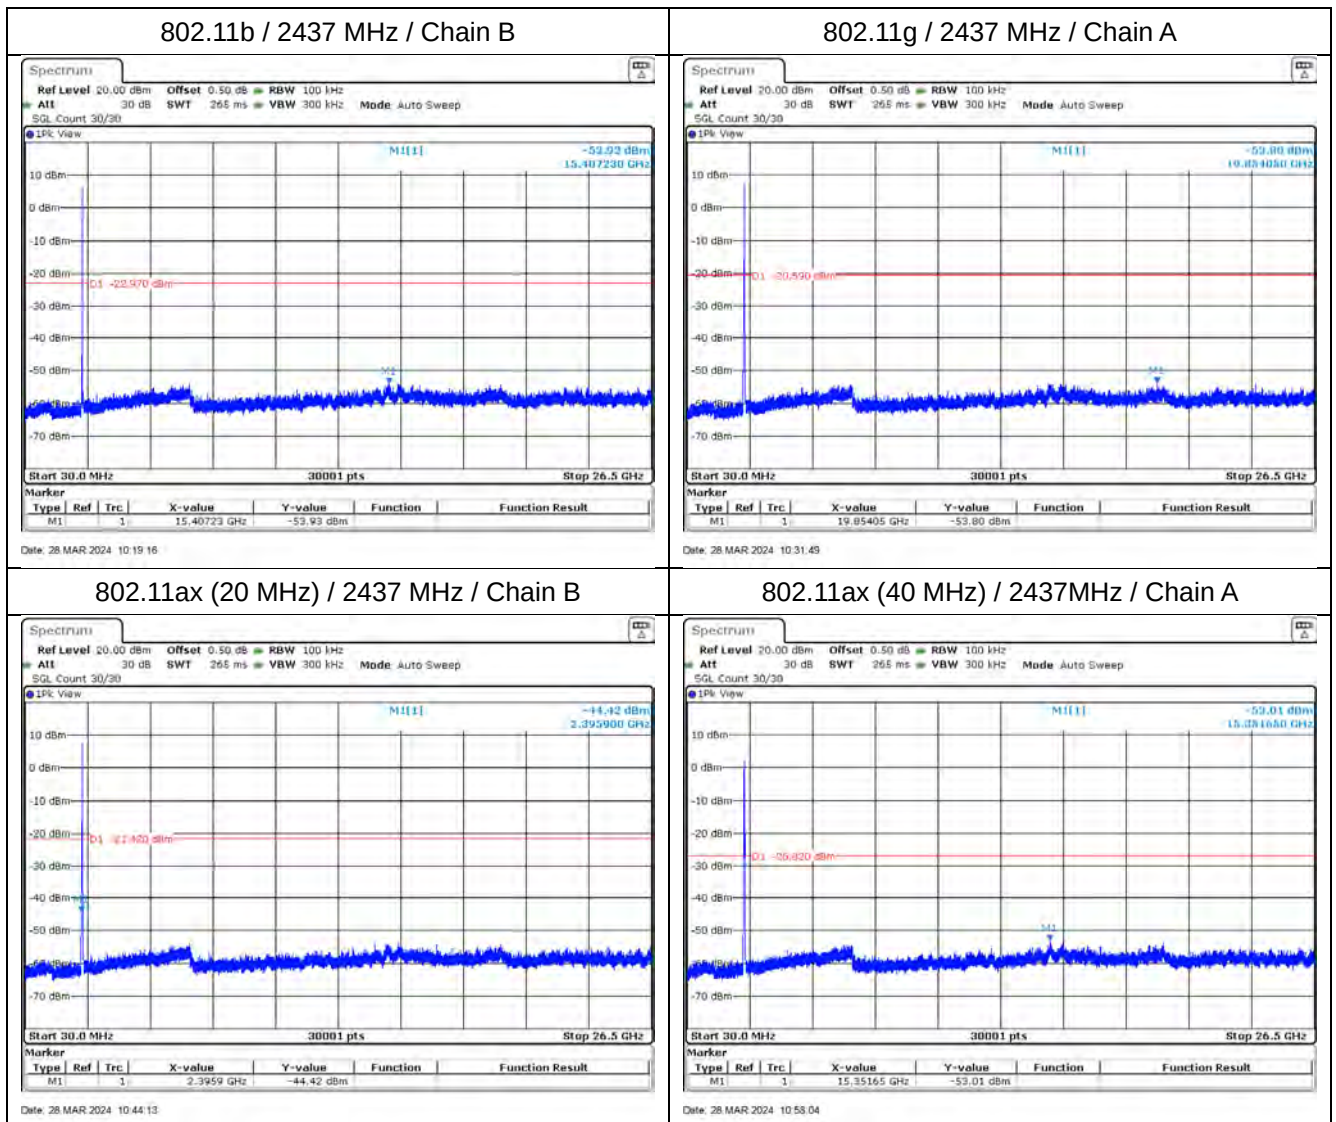
Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
802.11b	> 20	PASS
802.11g	> 20	PASS
802.11ax (20MHz)	> 20	PASS
802.11ax (40MHz)	> 20	PASS


802.11b / 2412 MHz / Chain A

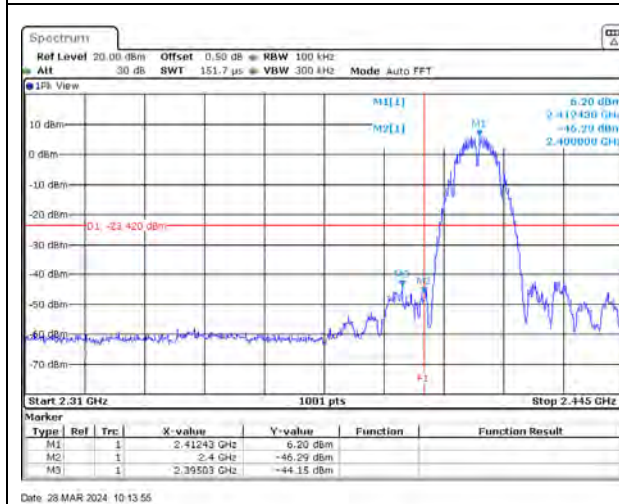


802.11b / 2412 MHz / Chain B

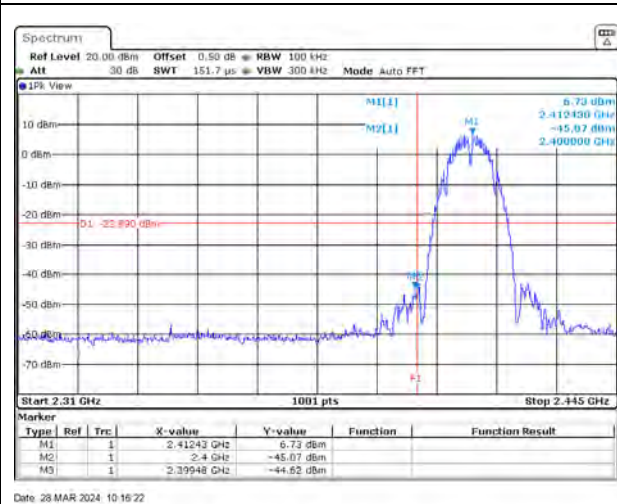


802.11b / 2462 MHz / Chain A

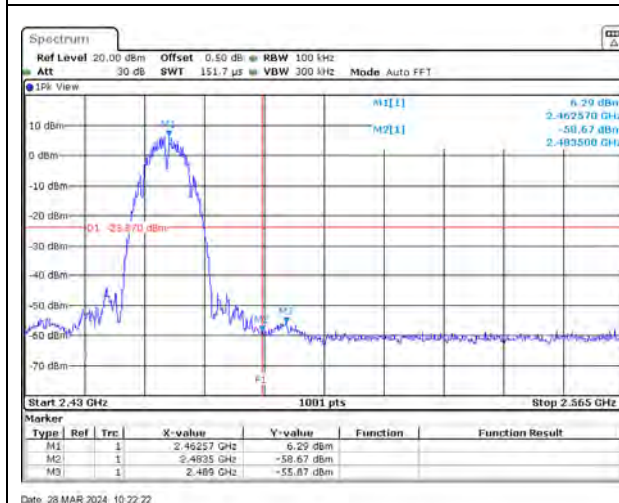

802.11b / 2462 MHz / Chain B

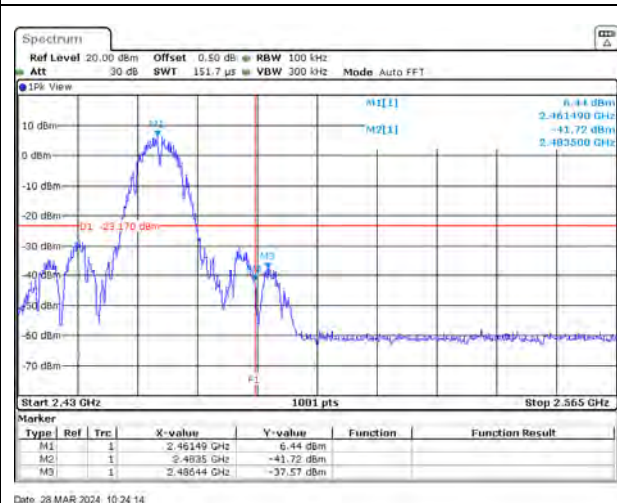


802.11g / 2412 MHz / Chain A

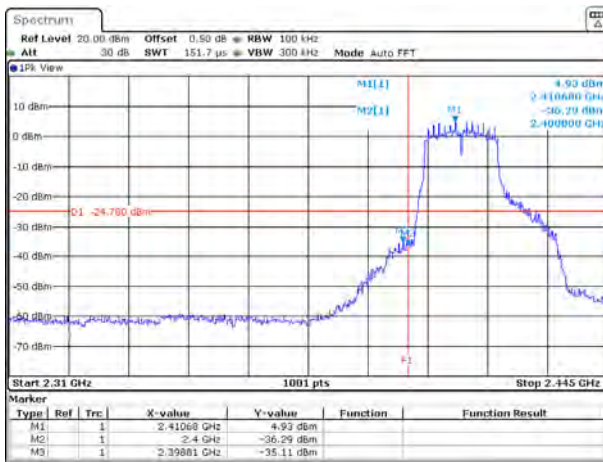


Date: 28 MAR 2024 10:28:57

802.11g / 2412 MHz / Chain B

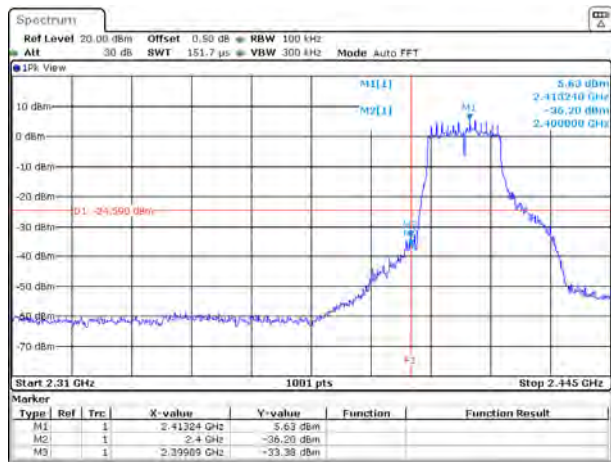


Date: 28 MAR 2024 10:27:05

802.11g / 2462 MHz / Chain A

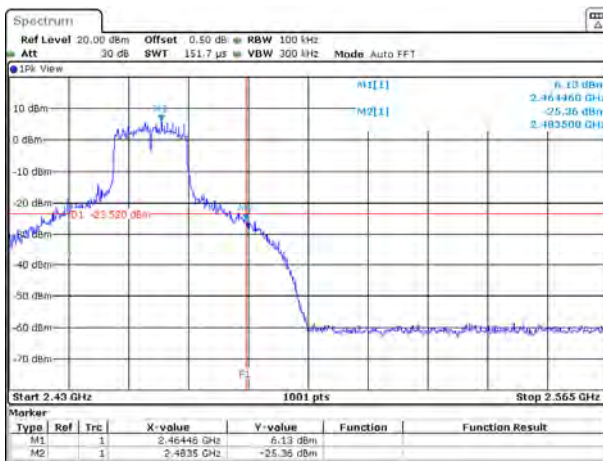


Date: 28 MAR 2024 10:37:47

802.11g / 2462 MHz / Chain B

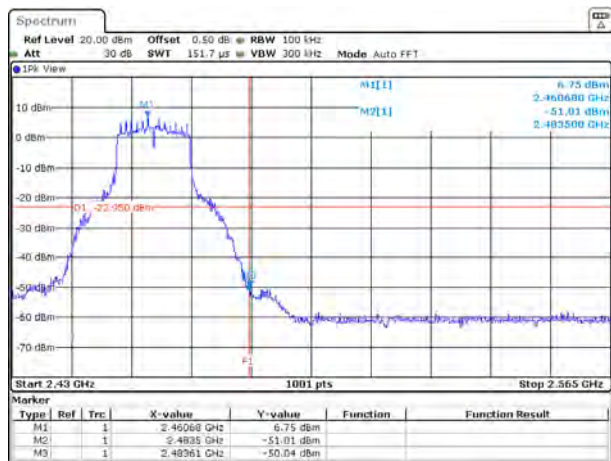


Date: 28 MAR 2024 10:35:56

802.11ax (20 MHz) / 2412 MHz / Chain A

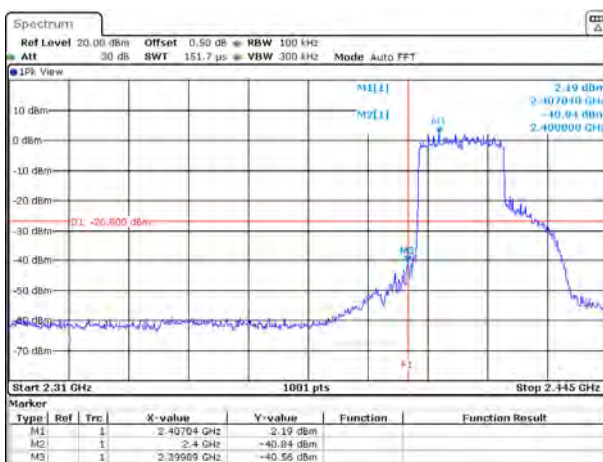


Date: 28 MAR 2024 10:40:00

802.11ax (20 MHz) / 2412 MHz / Chain B

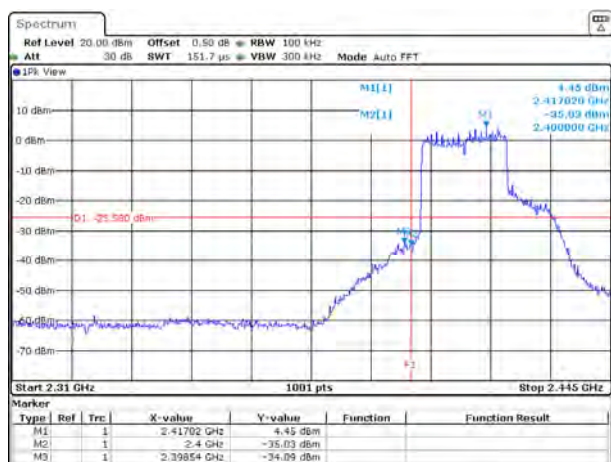


Date: 28 MAR 2024 10:41:47

802.11ax (20 MHz) / 2462 MHz / Chain A

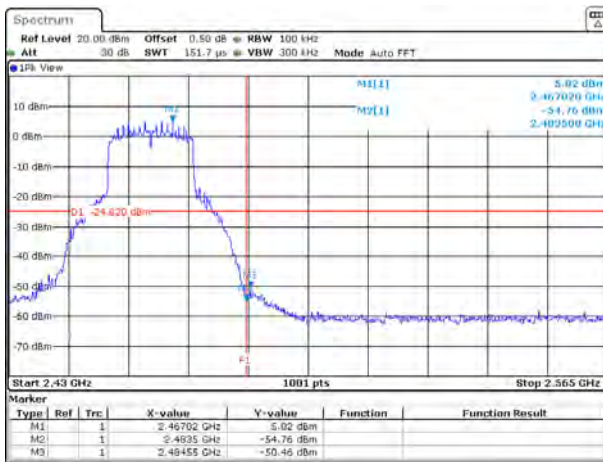


Date: 28 MAR 2024 10:47:27

802.11ax (20 MHz) / 2462 MHz / Chain B

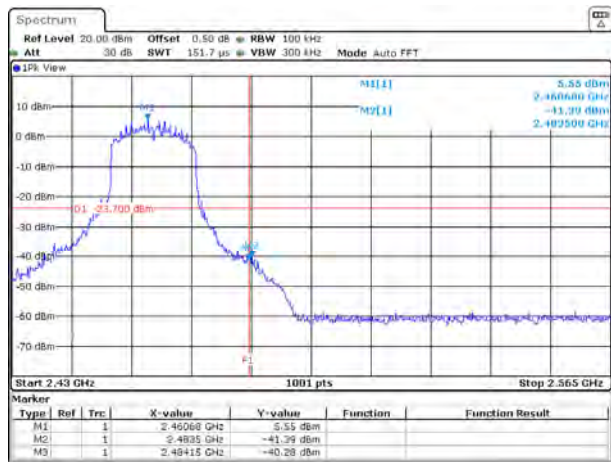


Date: 28 MAR 2024 10:49:19

802.11ax (40 MHz) / 2422 MHz / Chain A

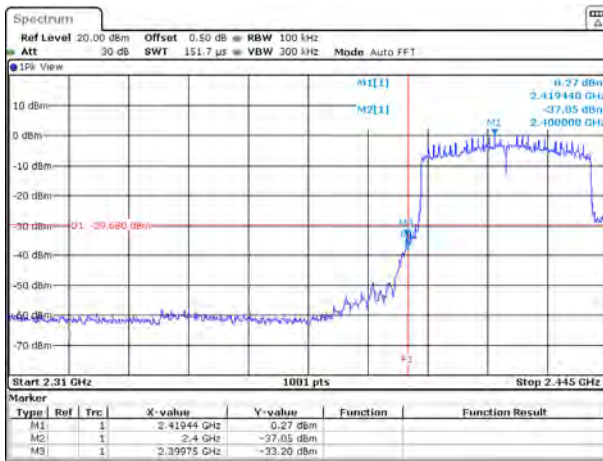


Date: 28 MAR 2024 10:55:49

802.11ax (40 MHz) / 2422 MHz / Chain B

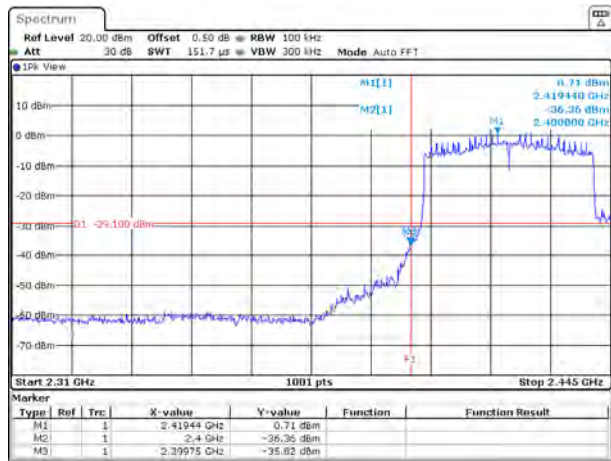


Date: 28 MAR 2024 10:53:25

802.11ax (40 MHz) / 2452 MHz / Chain A

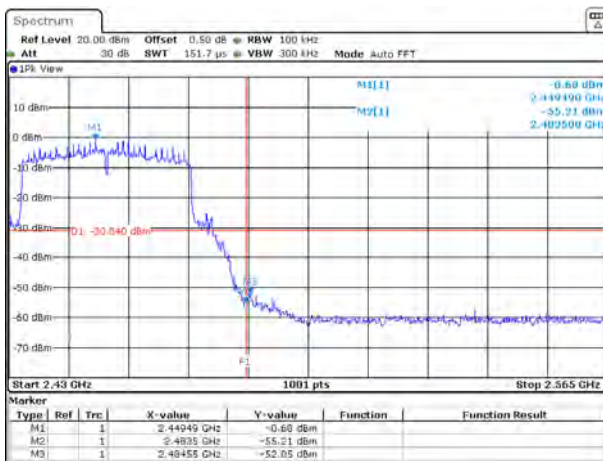

Date: 28 MAR 2024 11:03:21


802.11ax (40 MHz) / 2452 MHz / Chain B

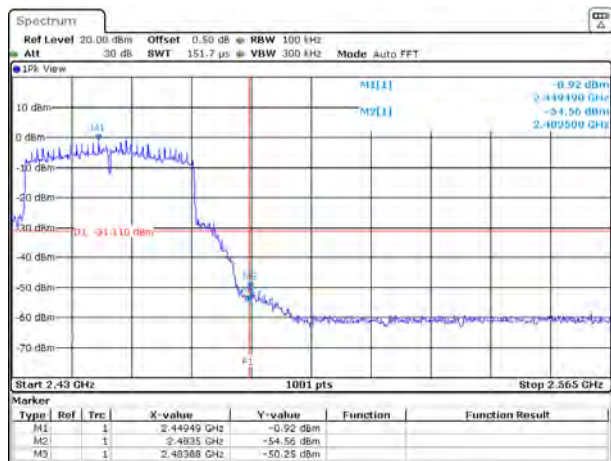

Date: 28 MAR 2024 11:01:18

Appendix F. Test Result of Radiated Emission


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Peter

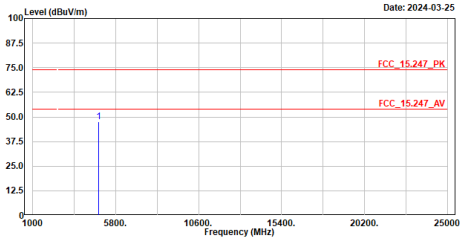

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	47.56	74.00	-26.44	61.28	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2412MHz
TEST BY :Peter

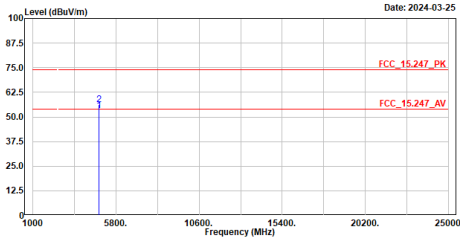

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	53.39	54.00	-0.61	67.11	-13.72	Average
2	4824.000	56.33	74.00	-17.67	70.05	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Peter

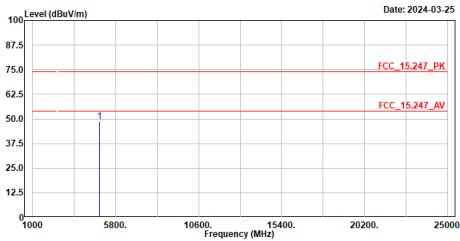

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	48.82	74.00	-25.18	62.40	-13.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Peter

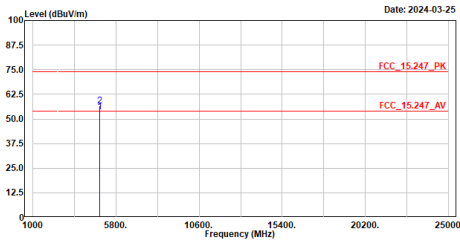

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	53.43	54.00	-0.57	67.01	-13.58	Average
2	4874.000	56.49	74.00	-17.51	70.07	-13.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Peter

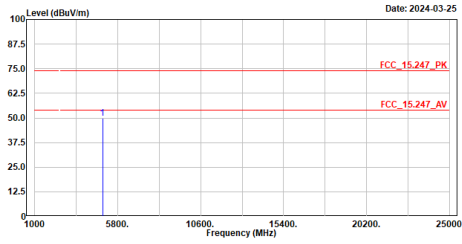

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	49.82	74.00	-24.18	63.17	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Peter

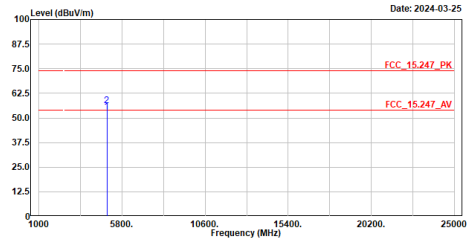

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	53.35	54.00	-0.65	66.70	-13.35	Average
2	4924.000	56.41	74.00	-17.59	69.76	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

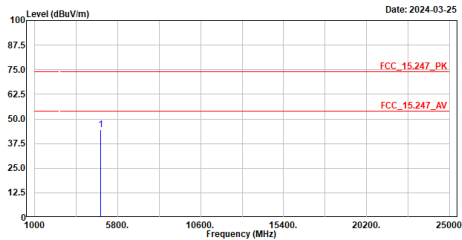

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	44.60	74.00	-29.40	58.32	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
TEST BY :Caster

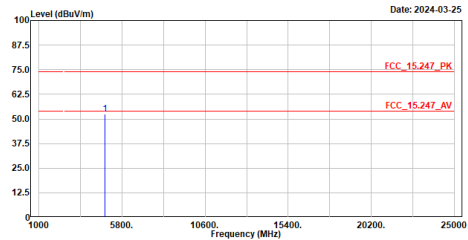

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	52.28	74.00	-21.72	66.00	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

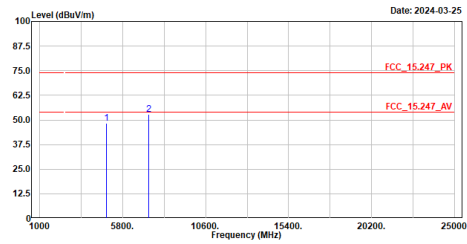


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	48.21	74.00	-25.79	61.79	-13.58	Peak
2	7311.000	52.78	74.00	-21.22	62.20	-9.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

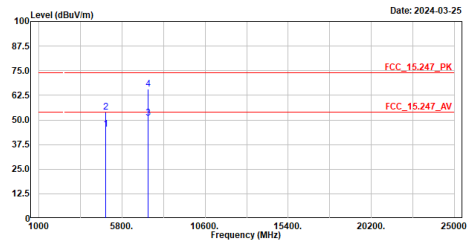


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	45.44	54.00	-8.56	59.02	-13.58	Average
2	4874.000	54.04	74.00	-19.96	67.62	-13.58	Peak
3	7311.000	50.89	54.00	-3.11	60.31	-9.42	Average
4	7311.000	65.62	74.00	-8.38	75.04	-9.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

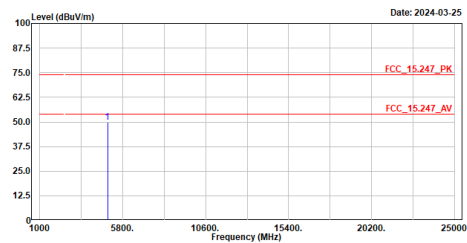


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	49.68	74.00	-24.32	63.03	-13.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster

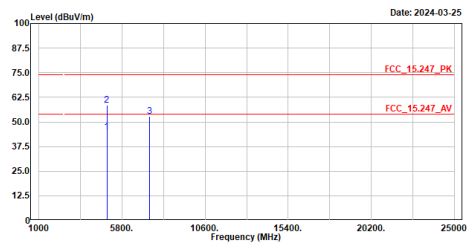


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	45.09	54.00	-8.91	58.44	-13.35	Average
2	4924.000	58.41	74.00	-15.59	71.76	-13.35	Peak
3	7386.000	52.76	74.00	-21.24	62.28	-9.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

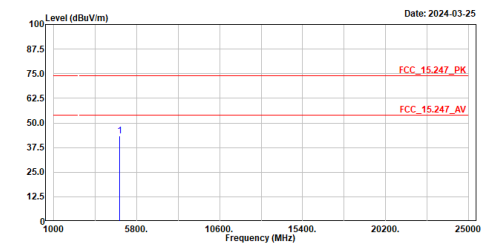

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	43.55	74.00	-30.45	57.27	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

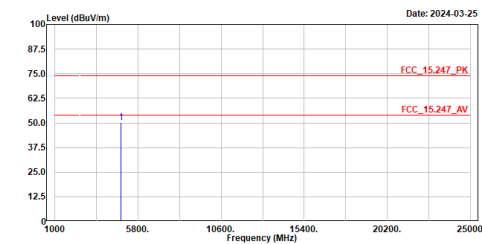

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	50.21	74.00	-23.79	63.93	-13.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

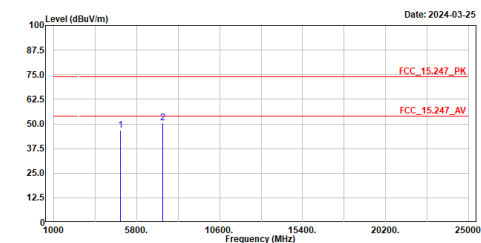

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	46.73	74.00	-27.27	60.31	-13.58	Peak
2	7311.000	50.43	74.00	-23.57	59.85	-9.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

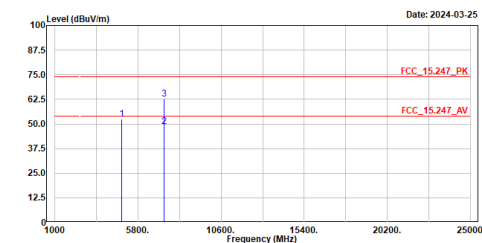

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	52.37	74.00	-21.63	65.95	-13.58	Peak
2	7311.000	48.54	54.00	-5.46	57.96	-9.42	Average
3	7311.000	62.69	74.00	-11.31	72.11	-9.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

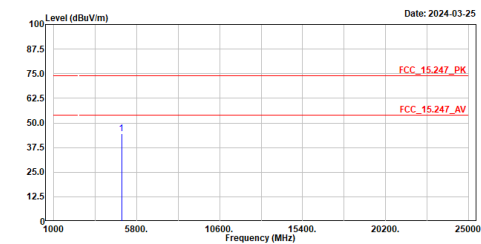

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	44.42	74.00	-29.58	57.77	-13.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

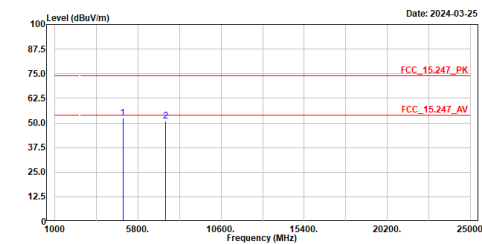

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	52.64	74.00	-21.36	65.99	-13.35	Peak
2	7386.000	51.02	74.00	-22.98	60.54	-9.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

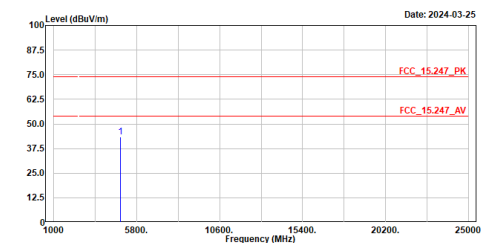

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	43.24	74.00	-30.76	56.90	-13.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

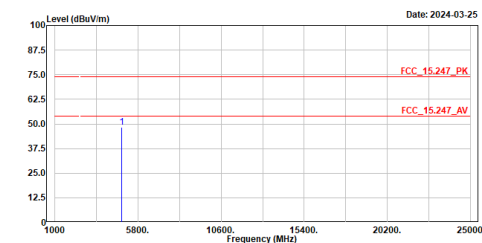

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	48.16	74.00	-25.84	61.82	-13.66	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

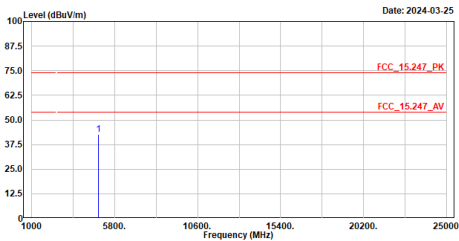


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

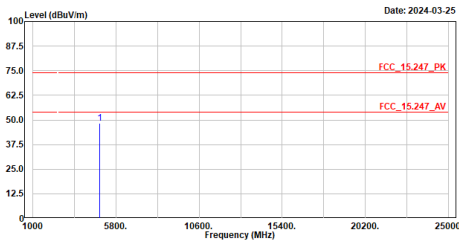


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

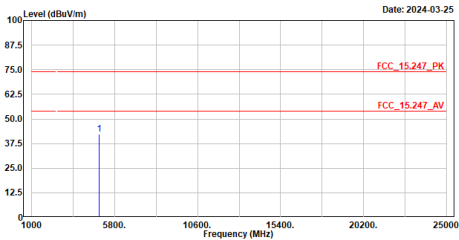


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

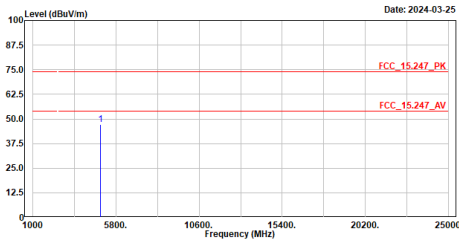

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

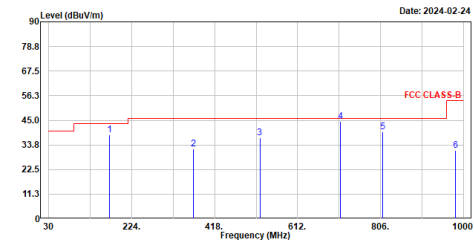

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	171.620	38.31	43.50	-5.19	62.75	-24.44	QP
2	368.530	31.94	46.00	-14.06	53.20	-21.26	QP
3	523.730	36.85	46.00	-9.15	54.38	-17.53	QP
4	712.880	44.54	46.00	-1.46	58.31	-13.77	QP
5	811.820	39.80	46.00	-6.20	52.24	-12.44	QP
6	981.570	31.33	54.00	-22.67	42.06	-10.73	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

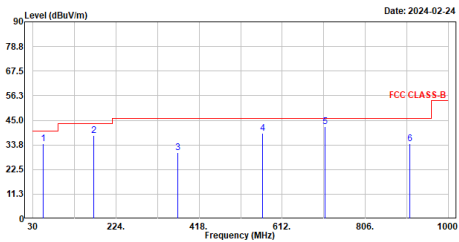

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	53.280	34.46	40.00	-5.54	57.88	-23.42	QP
2	171.620	38.17	43.50	-5.33	62.61	-24.44	QP
3	368.530	30.19	46.00	-15.81	51.45	-21.26	QP
4	565.440	39.04	46.00	-6.96	55.48	-16.44	QP
5	712.880	42.17	46.00	-3.83	55.94	-13.77	QP
6	909.790	34.18	46.00	-11.82	45.51	-11.33	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Peter

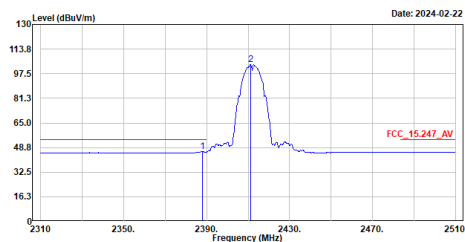

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	46.01	54.00	-7.99	15.52	30.49	Average
2	2411.200	103.54	-----	-----	73.20	30.34	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Peter

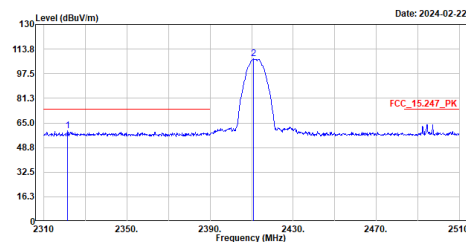

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.400	59.61	74.00	-14.39	29.20	30.41	Peak
2	2411.000	107.20	-----	-----	76.86	30.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Peter

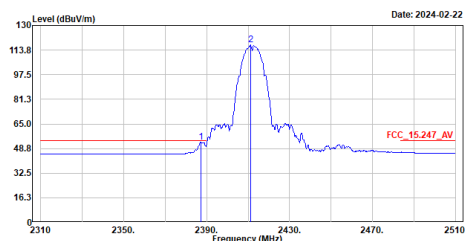

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.200	52.86	54.00	-1.14	22.38	30.48	Average
2	2411.200	117.03	-----	-----	86.69	30.34	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Peter

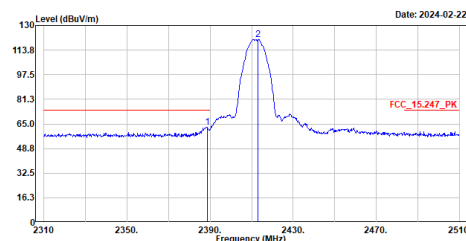

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	62.88	74.00	-11.12	32.38	30.50	Peak
2	2413.200	120.75	-----	-----	90.41	30.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
TEST BY :Caster

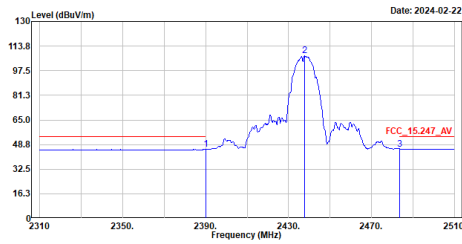

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.57	54.00	-8.43	15.06	30.51	Average
2	2437.800	107.49	-----	-----	77.20	30.29	Average
3	2483.600	45.85	54.00	-8.15	15.47	30.38	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
TEST BY :Caster

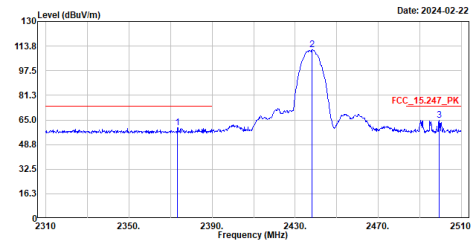

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2373.400	59.69	74.00	-14.31	29.30	30.39	Peak
2	2438.200	111.36	-----	-----	81.07	30.29	Peak
3	2499.200	64.92	74.00	-9.08	34.36	30.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2437MHz
TEST BY :Caster

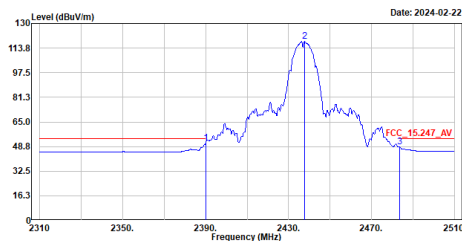

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.14	54.00	-2.86	20.63	30.51	Average
2	2437.800	118.14	-----	-----	87.85	30.29	Average
3	2483.600	48.49	54.00	-5.51	18.11	30.38	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2437MHz
TEST BY :Caster

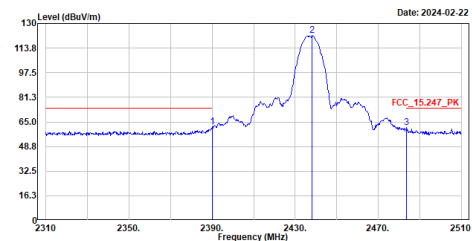

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	61.73	74.00	-12.27	31.22	30.51	Peak
2	2438.200	121.91	-----	-----	91.62	30.29	Peak
3	2483.600	61.39	74.00	-12.61	31.01	30.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Peter

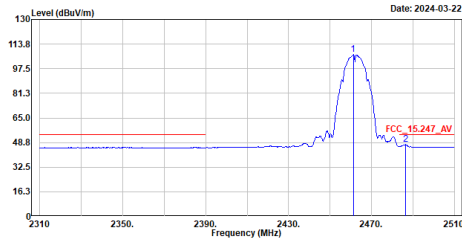


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	106.77	-----	-----	76.46	30.31	Average
2	2486.400	47.36	54.00	-6.64	16.95	30.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Peter

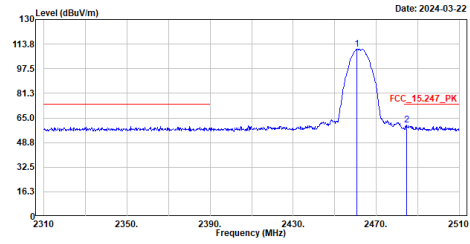


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.800	110.56	-----	-----	80.25	30.31	Peak
2	2484.600	60.16	74.00	-13.84	29.76	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Peter

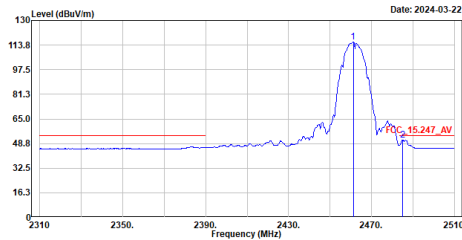


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	115.83	-----	-----	85.52	30.31	Average
2	2485.000	50.84	54.00	-3.16	20.44	30.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Peter

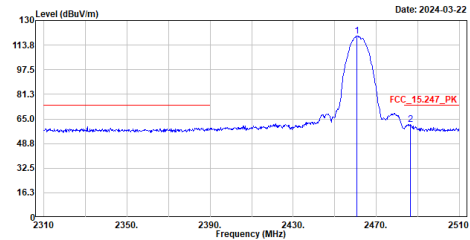


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	119.86	-----	-----	89.55	30.31	Peak
2	2486.400	61.46	74.00	-12.54	31.05	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Peter

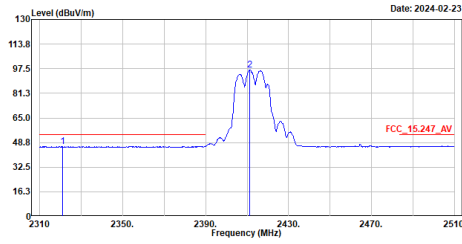


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.000	46.34	54.00	-7.66	15.93	30.41	Average
2	2411.200	96.69	-----	-----	66.35	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Peter

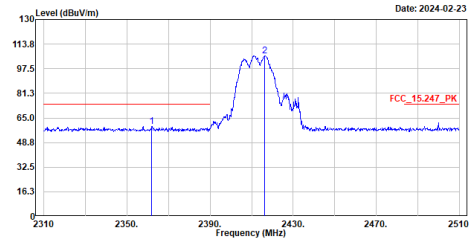


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.000	59.54	74.00	-14.46	29.09	30.45	Peak
2	2416.200	105.91	-----	-----	75.57	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Peter

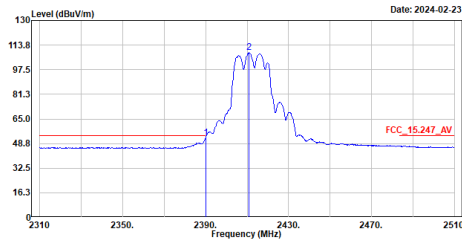


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.37	54.00	-1.63	21.86	30.51	Average
2	2410.000	108.88	-----	-----	78.54	30.34	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Peter

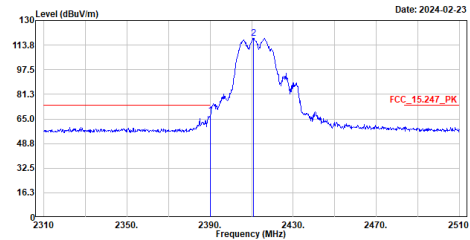

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	67.36	74.00	-6.64	36.85	30.51	Peak
2	2411.000	118.40	-----	-----	88.06	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.800	60.34	74.00	-13.66	29.87	30.47	Peak
2	2435.800	110.83	-----	-----	80.52	30.31	Peak
3	2484.800	61.80	74.00	-12.20	31.42	30.38	Peak

No.	Frequency	Level	Limit Line	Over- Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.27	54.00	-1.73	21.76	30.51	Average
2	2435.800	112.78	-----	-----	82.47	30.31	Average
3	2485.600	52.25	54.00	-1.75	21.84	30.41	Average

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	70.90	74.00	-3.10	40.39	30.51	Peak
2	2436.000	122.49	-----	-----	92.18	30.31	Peak
3	2485.400	70.54	74.00	-3.46	40.14	30.40	Peak

Page : 22 of 31

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Peter

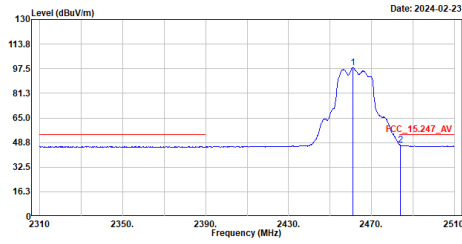


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	98.10	-----	-----	67.79	30.31	Average
2	2483.800	47.25	54.00	-6.75	16.87	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Peter

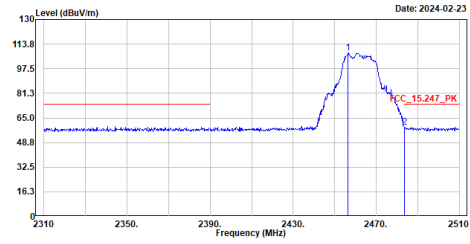


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2456.400	108.12	-----	-----	77.86	30.26	Peak
2	2483.600	58.96	74.00	-15.04	28.58	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Peter

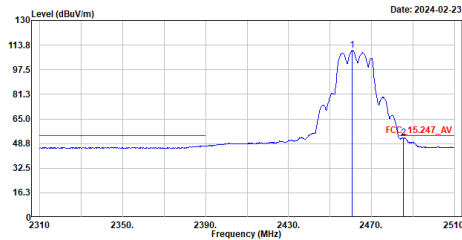


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	110.16	-----	-----	79.85	30.31	Average
2	2485.200	52.71	54.00	-1.29	22.31	30.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Peter

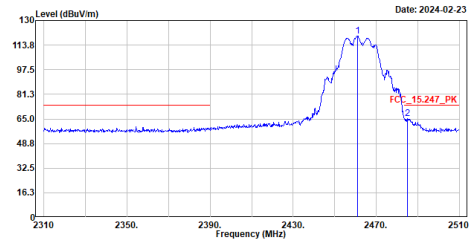


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	119.88	-----	-----	89.57	30.31	Peak
2	2485.000	65.21	74.00	-8.79	34.81	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

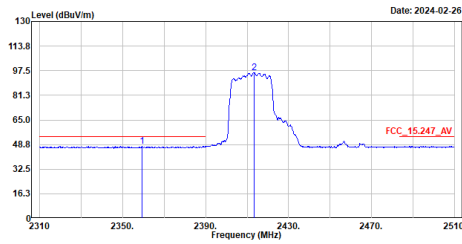

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

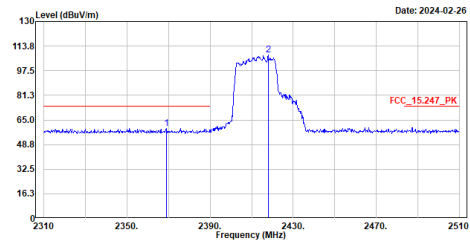

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

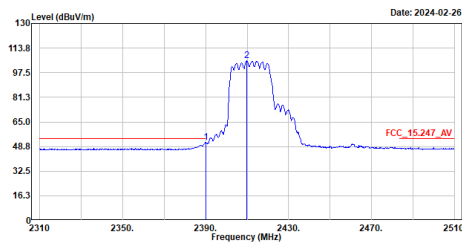

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Caster

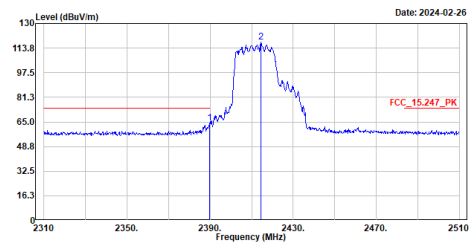

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2339.600	59.45	74.00	-14.55	29.00	30.45	Peak
2	2433.200	112.40	-----	-----	82.07	30.33	Peak
3	2484.600	59.90	74.00	-14.10	29.50	30.40	Peak

No.	Frequency	Level	Limit Line	Over- Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.95	54.00	-2.05	21.44	30.51	Average
2	2435.000	109.26	-----	-----	78.94	30.32	Average
3	2484.600	51.22	54.00	-2.78	20.82	30.40	Average

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	68.77	74.00	-5.23	38.26	30.51	Peak
2	2440.200	121.20	-----	-----	90.93	30.27	Peak
3	2488.000	65.20	74.00	-8.80	34.77	30.43	Peak

Page : 25 of 31


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

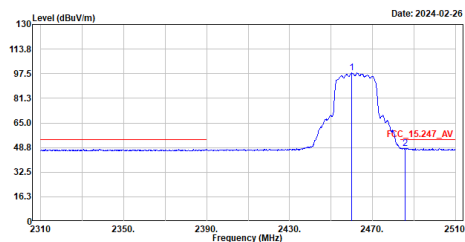

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.000	98.16	-----	-----	67.86	30.30	Average
2	2485.000	48.20	54.00	-5.80	17.79	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

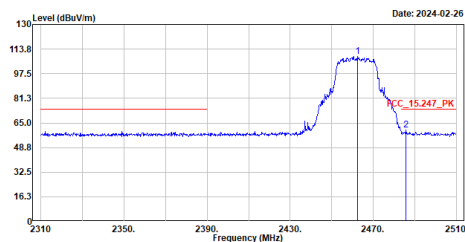

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2462.000	109.14	-----	-----	78.83	30.31	Peak
2	2485.000	60.28	74.00	-13.72	29.87	30.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

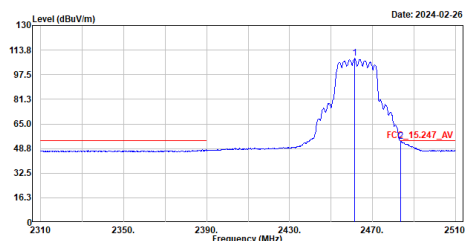

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.400	108.21	-----	-----	77.99	30.31	Average
2	2483.600	53.40	54.00	-0.60	23.02	30.38	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

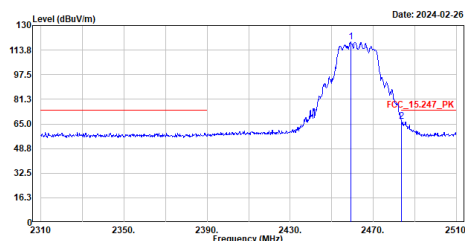

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.200	119.08	-----	-----	88.79	30.29	Peak
2	2483.600	66.78	74.00	-7.22	36.40	30.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

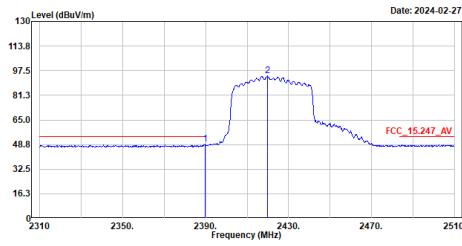


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	48.91	54.00	-5.09	18.40	30.51	Average
2	2419.800	94.05	-----	-----	63.70	30.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

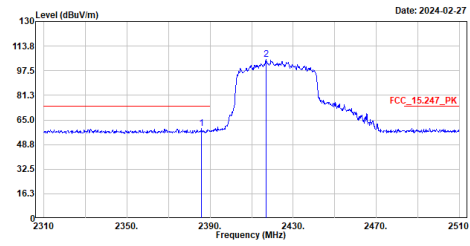


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.000	59.27	74.00	-14.73	28.81	30.46	Peak
2	2417.000	105.19	-----	-----	74.85	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

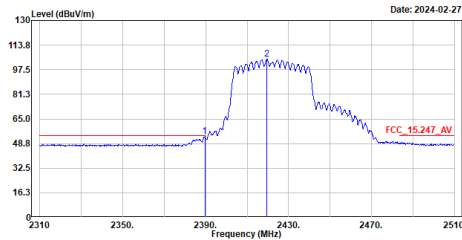


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.600	53.33	54.00	-0.67	22.82	30.51	Average
2	2419.400	104.66	-----	-----	74.31	30.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

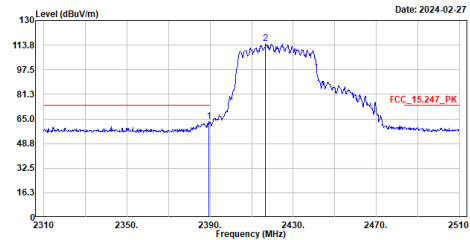


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.400	63.16	74.00	-10.84	32.66	30.50	Peak
2	2416.800	114.63	-----	-----	84.29	30.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

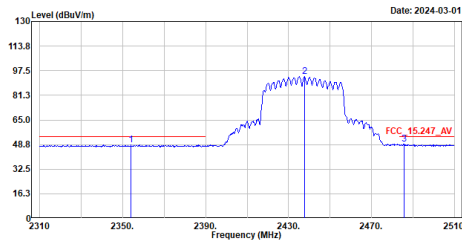


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2354.000	48.44	54.00	-5.56	17.92	30.52	Average
2	2437.800	93.50	-----	-----	63.21	30.29	Average
3	2485.600	49.07	54.00	-4.93	18.66	30.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

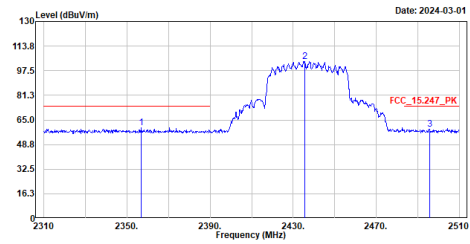


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2357.000	59.89	74.00	-14.11	29.39	30.50	Peak
2	2435.600	103.63	-----	-----	73.32	30.31	Peak
3	2495.600	58.79	74.00	-15.21	28.27	30.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
TEST BY :Caster

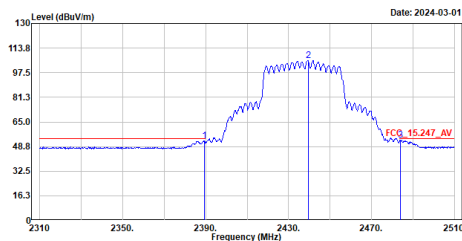


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	52.58	54.00	-1.42	22.08	30.50	Average
2	2439.400	105.48	-----	-----	75.20	30.28	Average
3	2484.000	53.05	54.00	-0.95	22.67	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
TEST BY :Caster

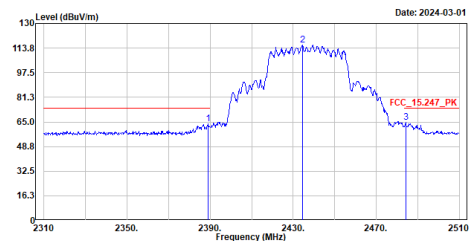


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	63.63	74.00	-10.37	33.13	30.50	Peak
2	2434.600	115.65	-----	-----	85.33	30.32	Peak
3	2484.200	64.91	74.00	-9.09	34.53	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

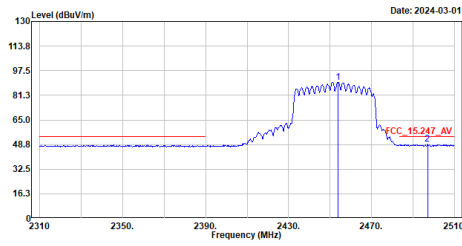


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.000	89.97	-----	-----	59.74	30.23	Average
2	2497.000	48.93	54.00	-5.07	18.39	30.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

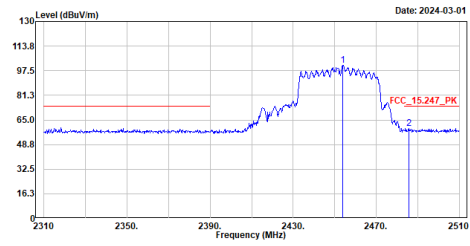


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.000	101.23	-----	-----	71.00	30.23	Peak
2	2485.600	59.48	74.00	-14.52	29.07	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

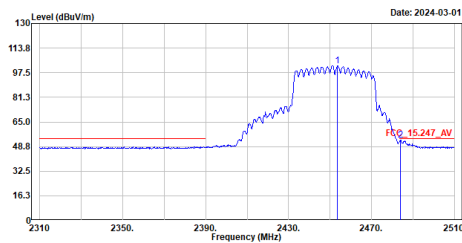


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	102.23	-----	-----	72.00	30.23	Average
2	2484.000	53.01	54.00	-0.99	22.63	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

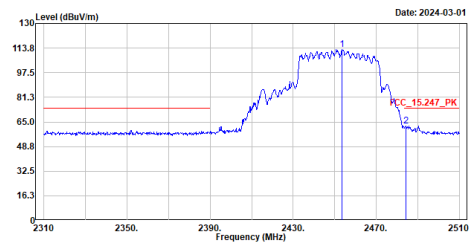

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	112.93	-----	-----	82.70	30.23	Peak
2	2484.200	62.34	74.00	-11.66	31.96	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.