

DFS Test Report

Applicant : DrayTek Corp.
Product Name : VigorAP 1070C 802.11be Ceiling-mount Access Point
Trade Name : DrayTek
Model Number : VigorAP 1070C
Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020
Received Date : Feb. 24, 2025
Test Period : Aug. 13, 2025 ~ Nov. 18, 2025
Issued Date : Dec. 31, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Dec. 31, 2025	Initial Issue	Rowan Hsieh

Verification of Compliance

Applicant : DrayTek Corp.

Product Name : VigorAP 1070C 802.11be Ceiling-mount Access Point

Trade Name : DrayTek

Model Number : VigorAP 1070C

FCC ID : VGYAP1070C

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Kai Yu Yang

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
1.4.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	10
3.1.	Mode of Operation.....	10
3.2.	EUT Test Step	10
3.3.	Test Instruments	11
4	Dynamic Frequency Selection	12
4.1.	Limits	12
4.2.	Test and Measurement System	16
5	Test Results	18
5.1.	Radar Waveforms and Traffic	18
5.2.	Channel Loading	38
5.3.	Channel Availability Check Time.....	42
5.4.	Channel Move Time and Channel Closing Transmission Time.....	47
5.5.	Non-Occupancy Period	50
5.6.	U-NII Detection Bandwidth	51
5.7.	Statistical Performance check	54

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 4	RSS-247 — Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
ANSI C63. 10: 2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.
 Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)
 Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Uncertainty	
	BD	WG
Conducted	1.8 dB	1.8 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	DrayTek Corp. No.26 Fu Shing Rd., HuKou County,Hsin-Chu Industrial Park,Hsin-Chu,Taiwan 303 R.O.C				
Product Name	VigorAP 1070C 802.11be Ceiling-mount Access Point				
Trade Name	DrayTek				
Model Number	VigorAP 1070C				
FCC ID	VGYP1070C				
Operate Frequency	Frequency Band		Frequency Range (MHz)		
	802.11a	U-NII Band 2-A	5260 – 5320		
		U-NII Band 2-C	5500 – 5700		
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20	U-NII Band 2-A	5260 – 5320		
		U-NII Band 2-C	5500 – 5700		
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40	U-NII Band 2-A	5270 – 5310		
		U-NII Band 2-C	5510 – 5670		
	802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80	U-NII Band 2-A	5290		
		U-NII Band 2-C	5530 –5610		
	802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160	U-NII Band 2-A	5250		
		U-NII Band 2-C	5570		
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	ANT-0 (Ant.1)	MLA25M-122AA0-A	Dipole antenna	5250-5350	5.7
				5470-5725	5.6
	ANT-1 (Ant.2)			5250-5350	5.4
				5470-5725	5.5
	ANT-2 (Ant.3)			5250-5350	5.8
				5470-5725	5.3
	ANT-3 (Ant.4)			5250-5350	5.2
				5470-5725	5.0
	ANT-4 (Ant.9)			5250-5350	6.6
5470-5725				6.3	

Note : ANT-4(Ant.9) is used for zero wait.

Antenna Delivery	4TX
Operate Temp. Range	0 ~ +40 °C
EUT Power Rating	DC 12 V, 3.5 A (from AC Adapter); DC 42 V-57 V / 0.57 A-0.78 A (from POE)

Testing Sample No.		
Test Item		Sample Number
Radiated Emissions	Below 1 GHz	---
	Above 1 GHz	---
Conducted		C252334_A009
Conducted Emission		---

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2020, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11be EHT20
802.11be EHT40
802.11be EHT80
802.11be EHT160

802.11be EHT20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5300 MHz.

802.11be EHT40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5310 MHz.

802.11be EHT80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5290 MHz.

802.11be EHT160:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5250 MHz.

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Aug. 13, 2025 ~ Nov. 18, 2025

Testing Engineer: Peter Shu

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Aug. 28, 2024 Aug. 29, 2025	1 year
☒	Signal Generator	Keysight	N5182B	MY53052569	Apr. 18, 2025	1 year
☒	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 18, 2025	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

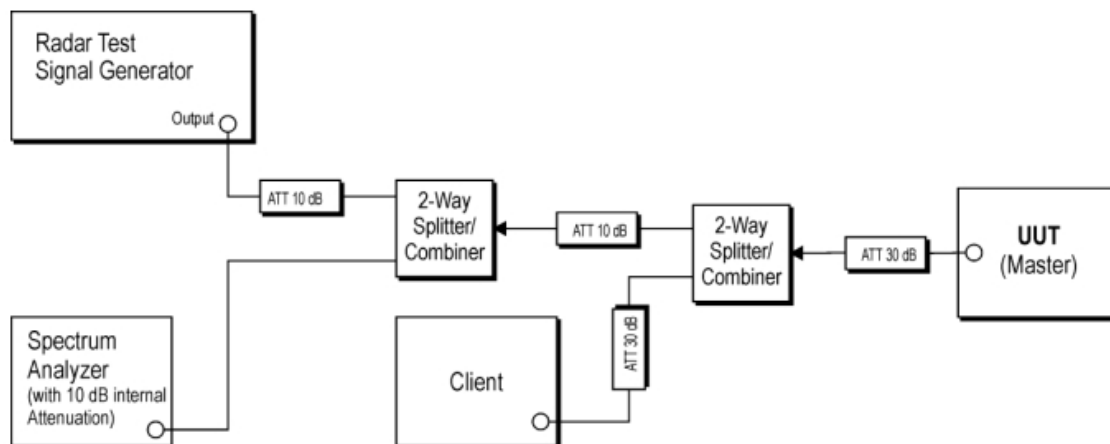

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	VigorAP 1070C 802.11be Ceiling-mount Access Point	DrayTek	VigorAP 1070C	VGYP1070C

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

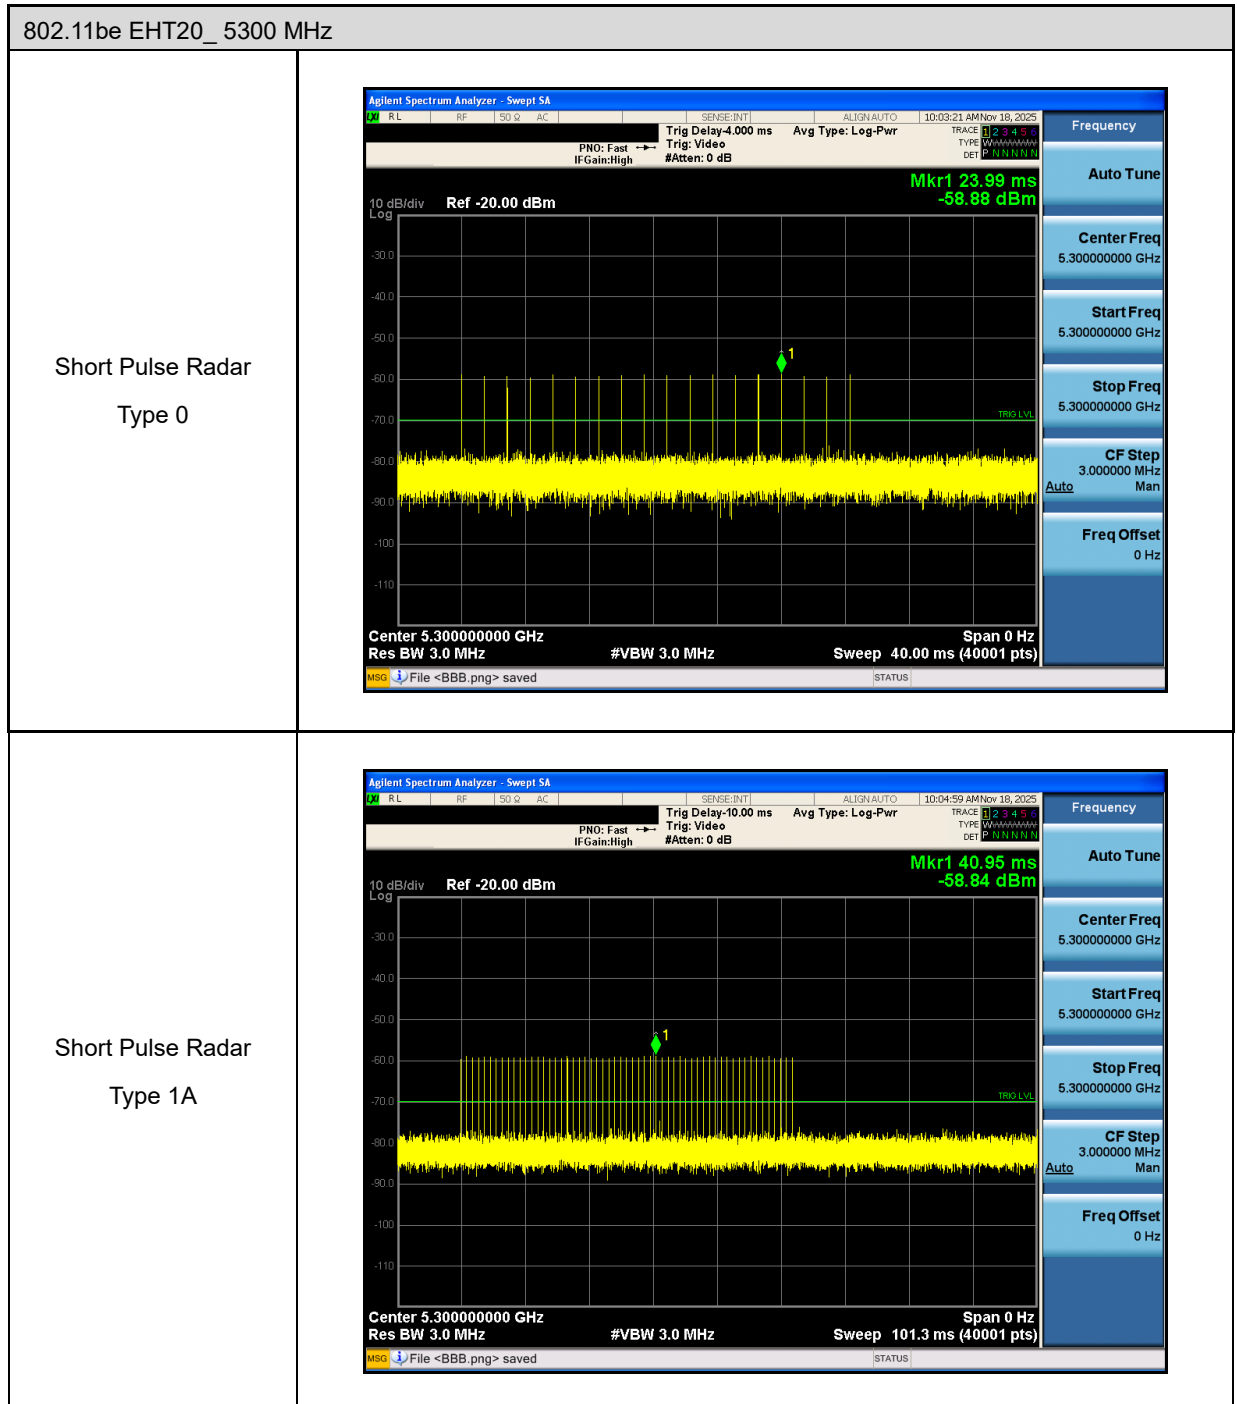


802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 1B

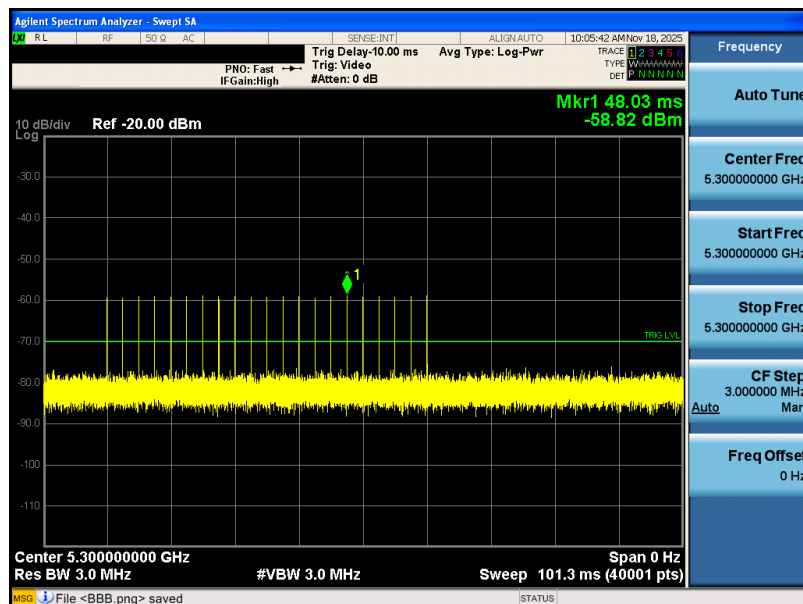


Short Pulse Radar
Type 2

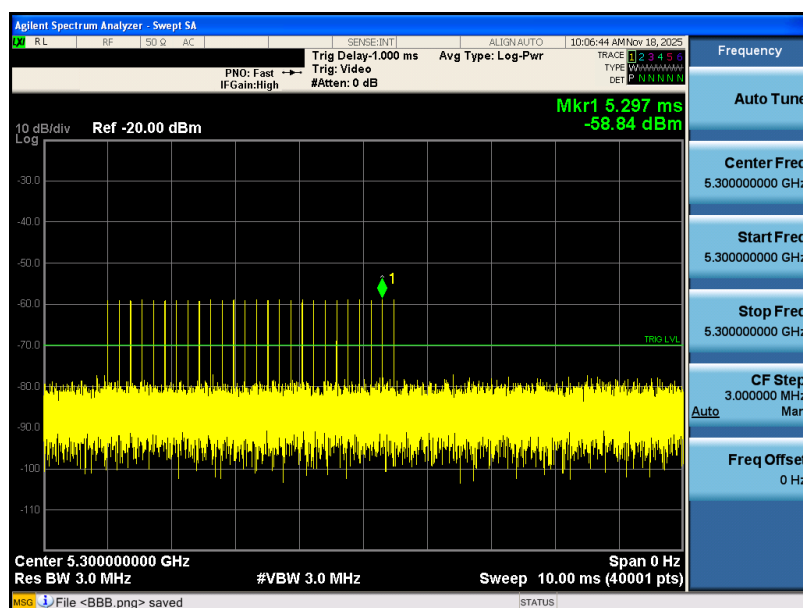


802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 3

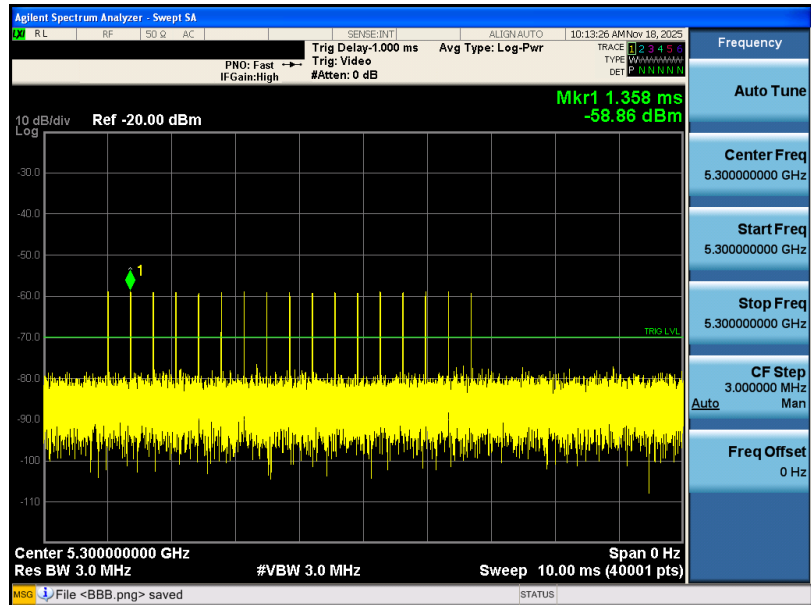


Short Pulse Radar
Type 4

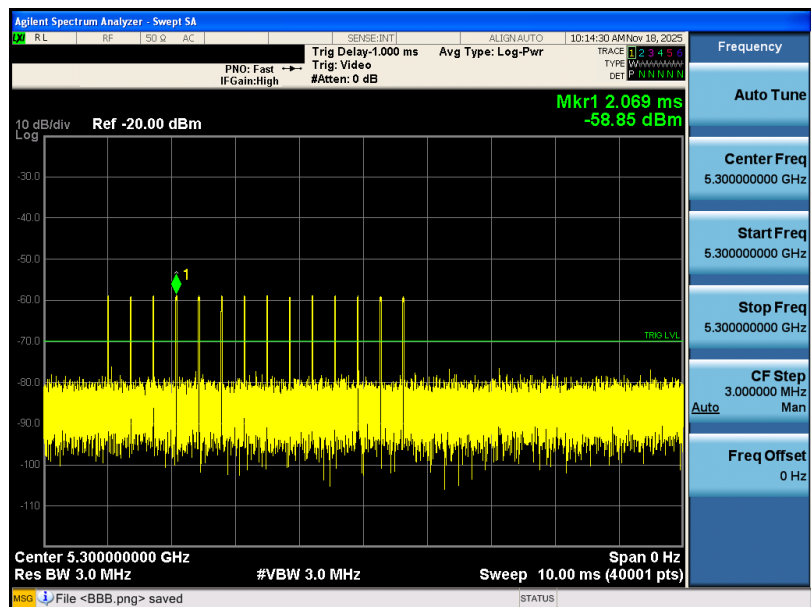



802.11be EHT20_ 5300 MHz

Long Pulse Radar
Type 5

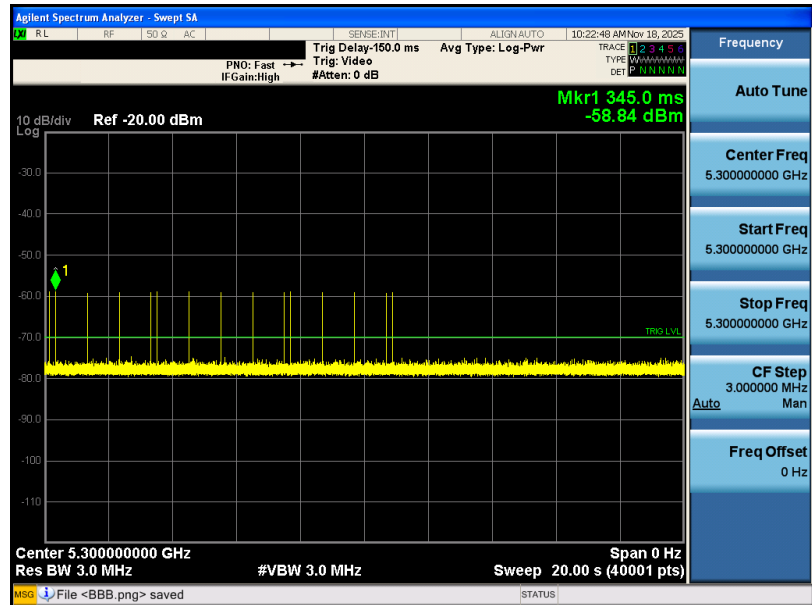


Frequency Hopping
Radar
Type 6

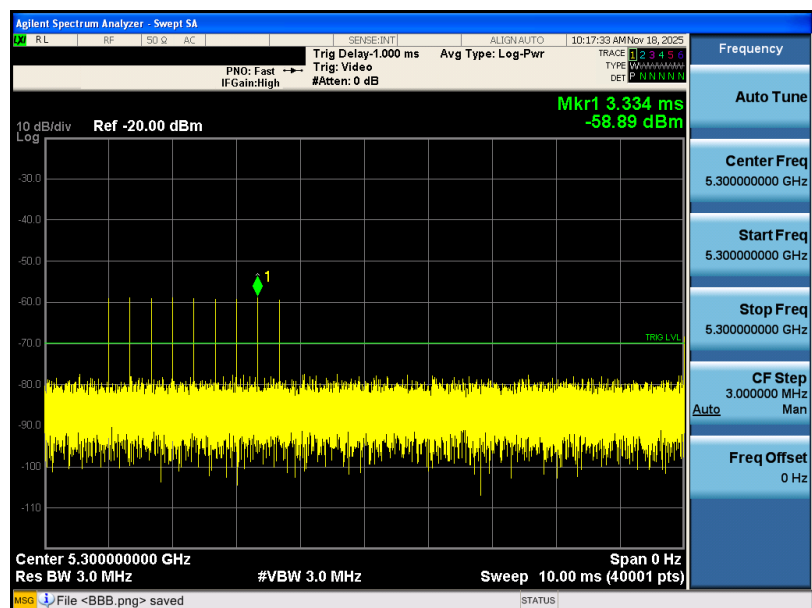

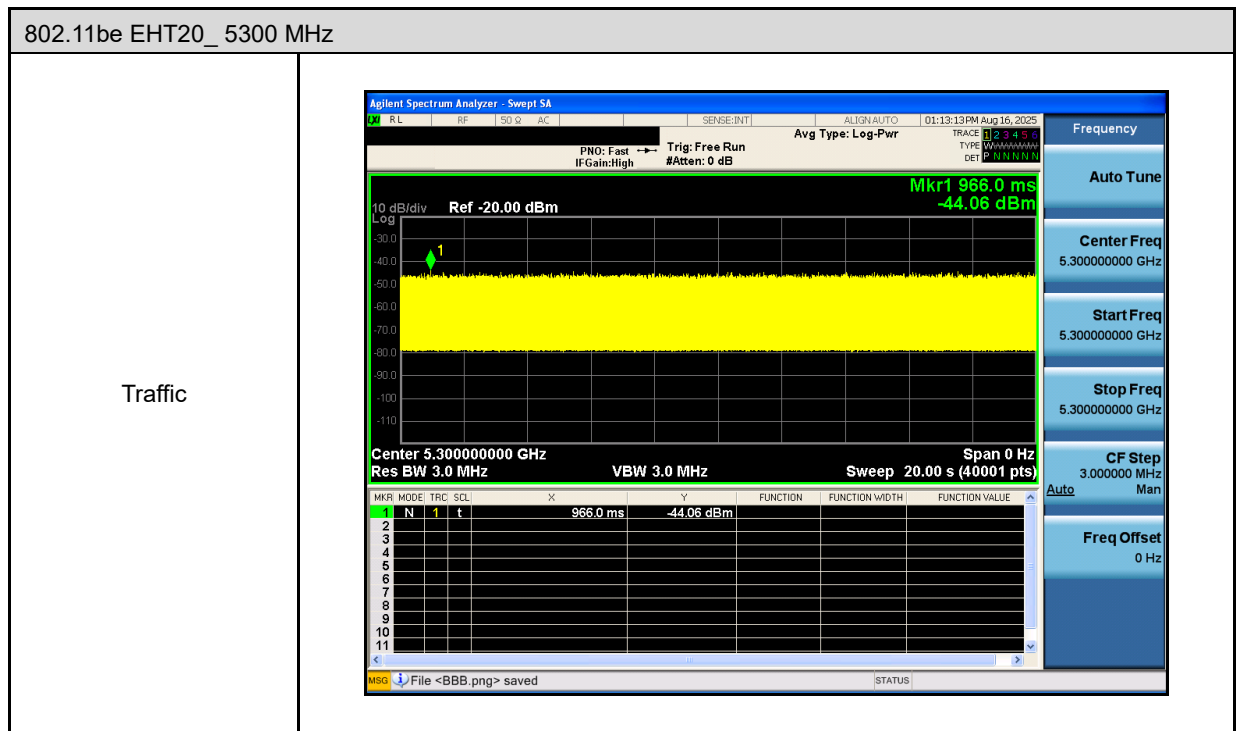


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 0

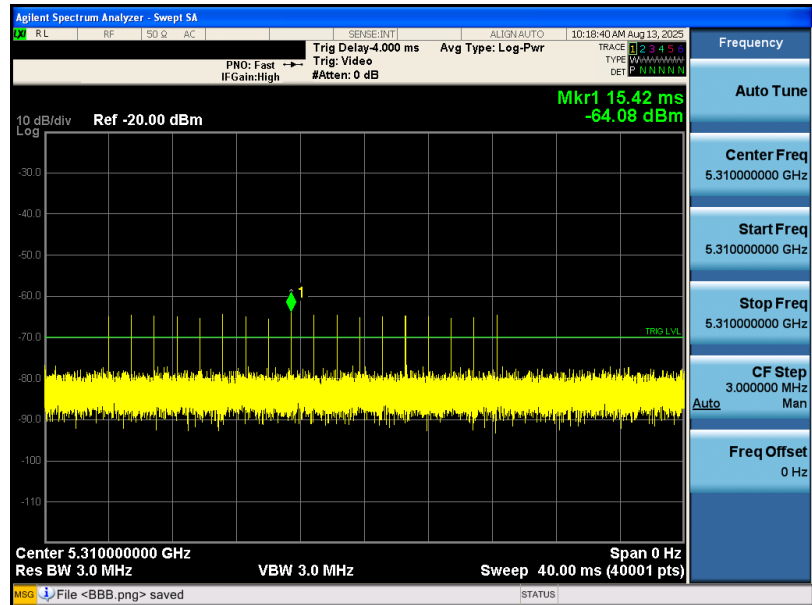


Short Pulse Radar
Type 1A

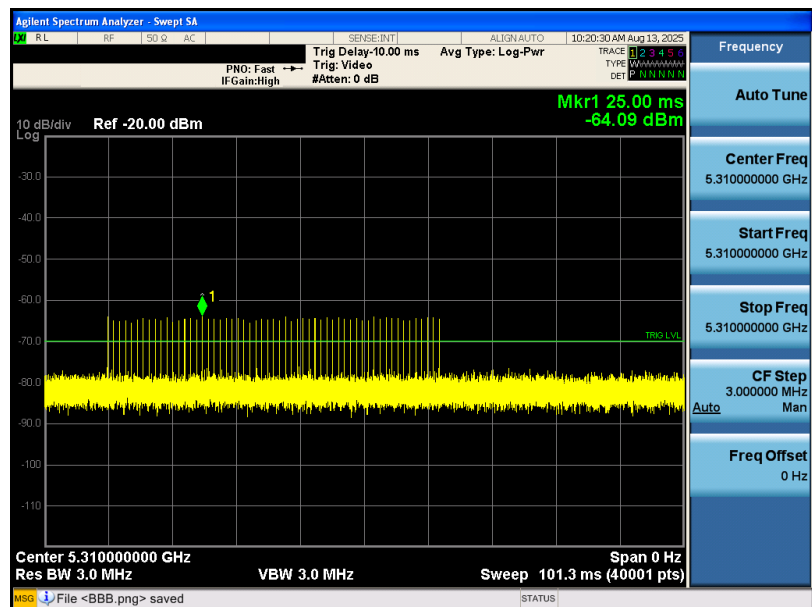


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 1B

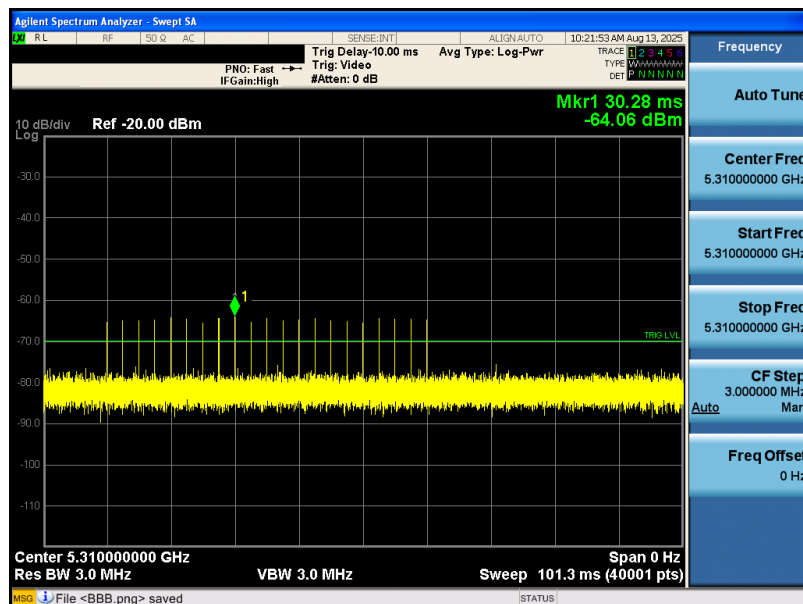


Short Pulse Radar
Type 2

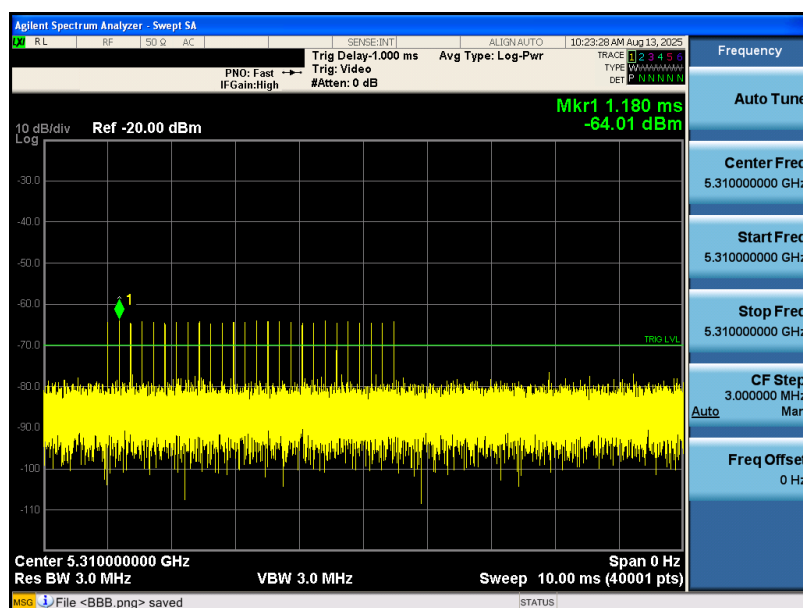


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 3

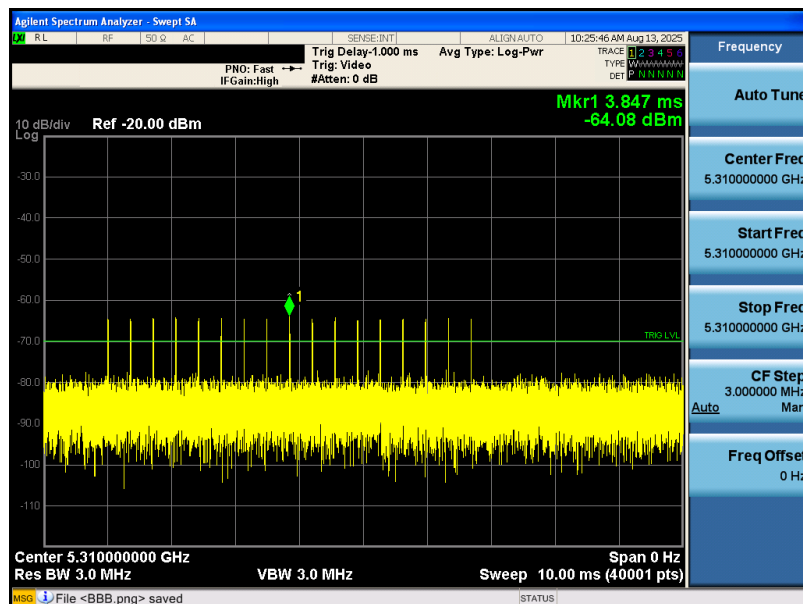


Short Pulse Radar
Type 4

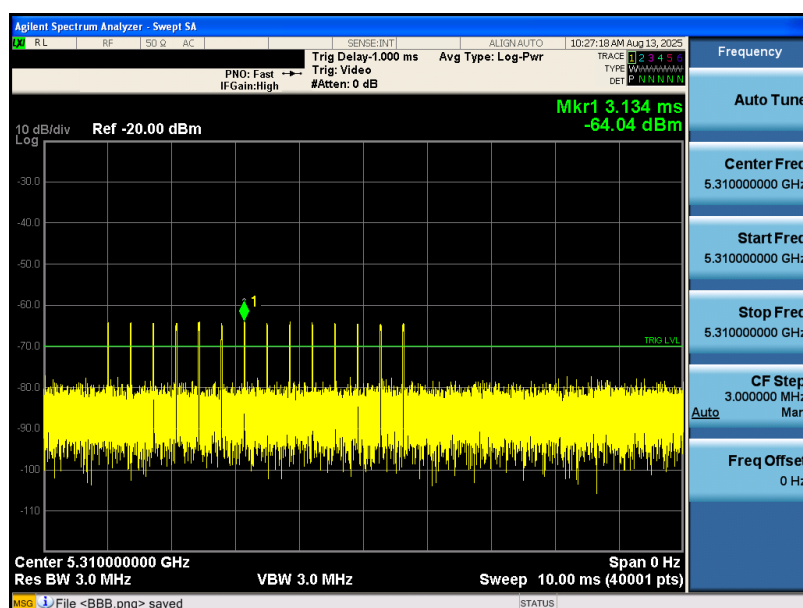


802.11be EHT40_ 5310 MHz

Long Pulse Radar
Type 5

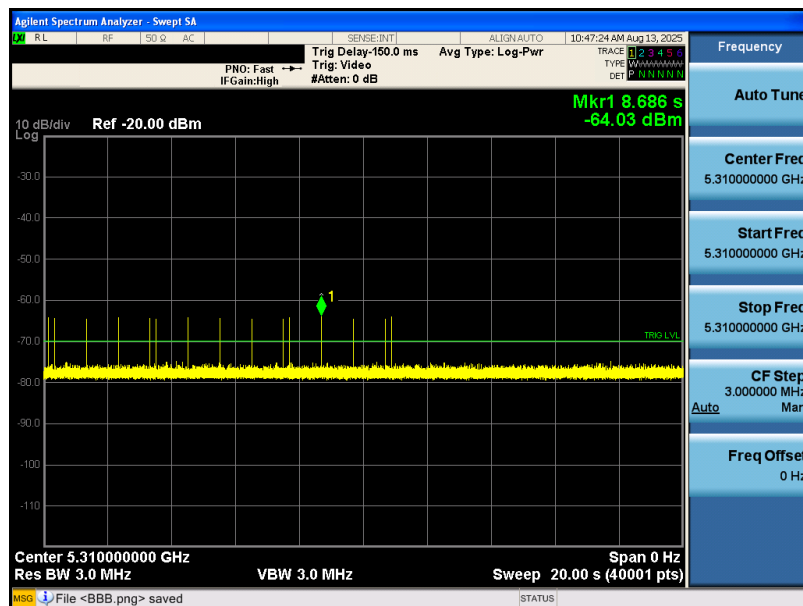


Frequency Hopping
Radar
Type 6

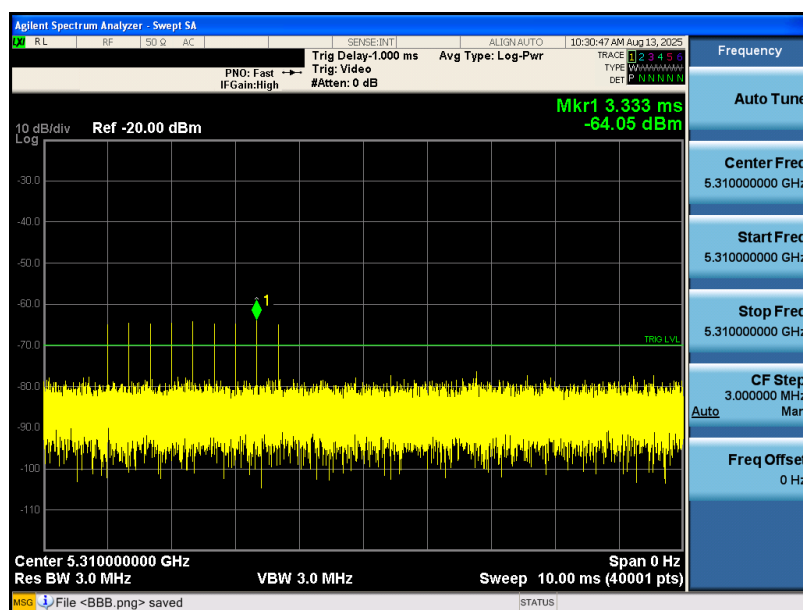


802.11be EHT40_ 5310 MHz

Traffic

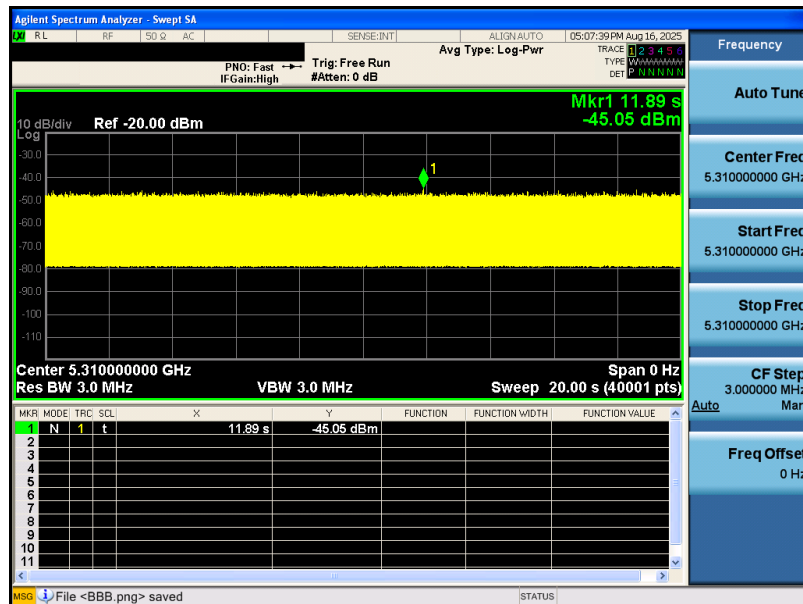


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 0

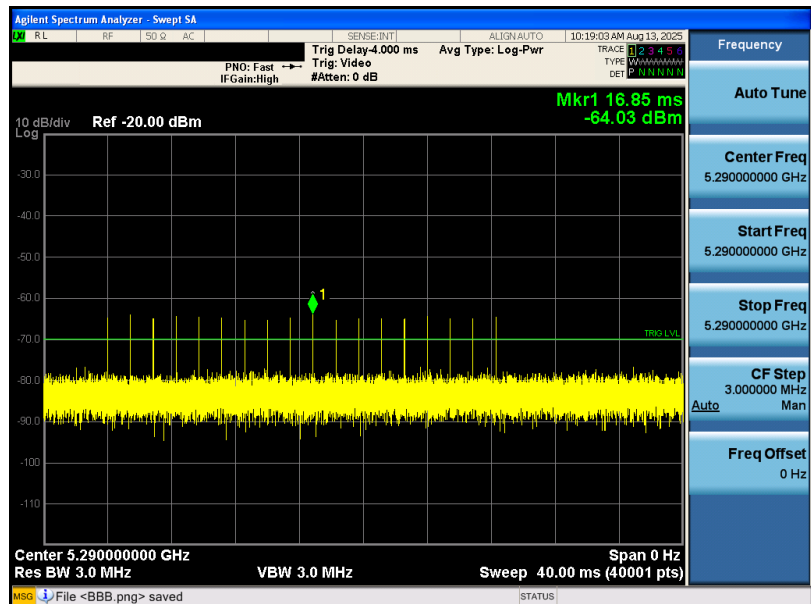


Short Pulse Radar
Type 1A

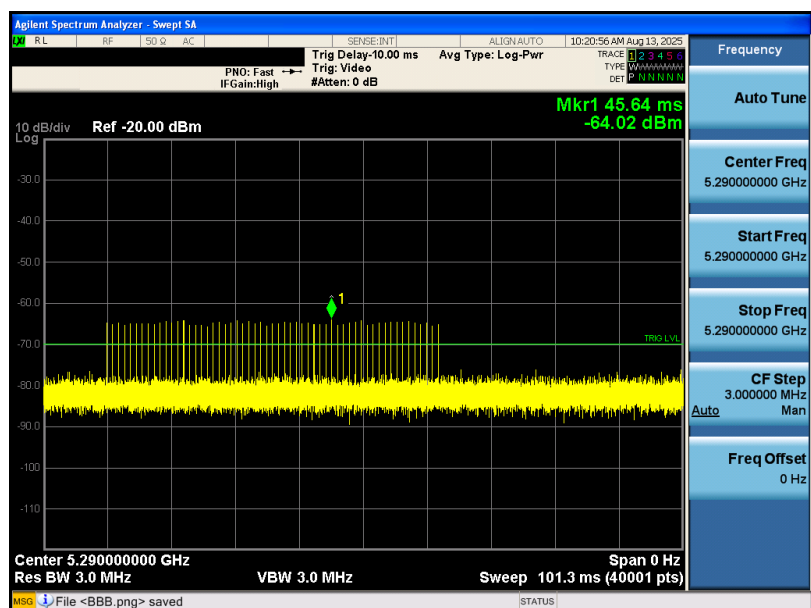


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 1B

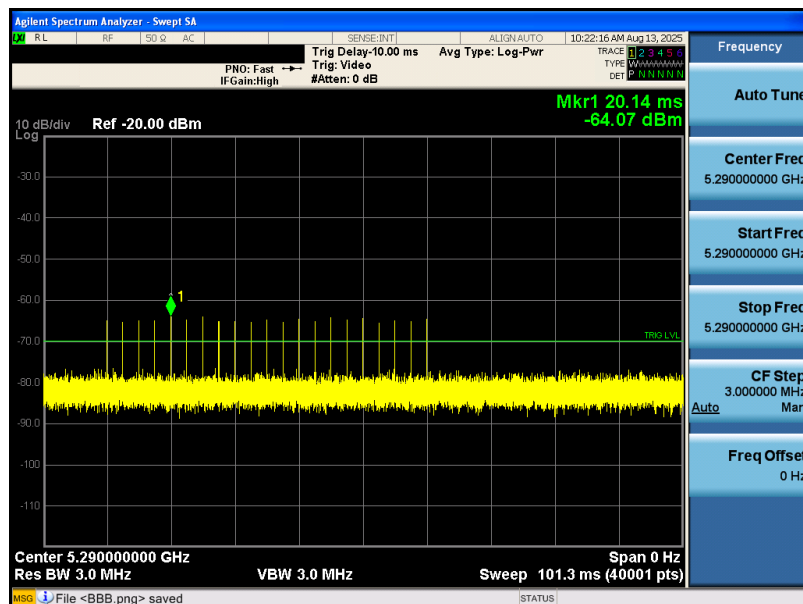


Short Pulse Radar
Type 2

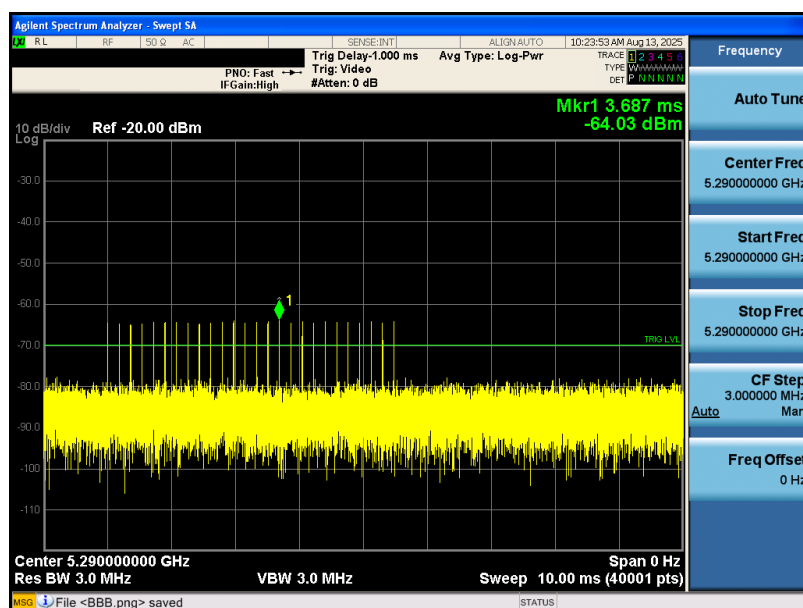


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 3

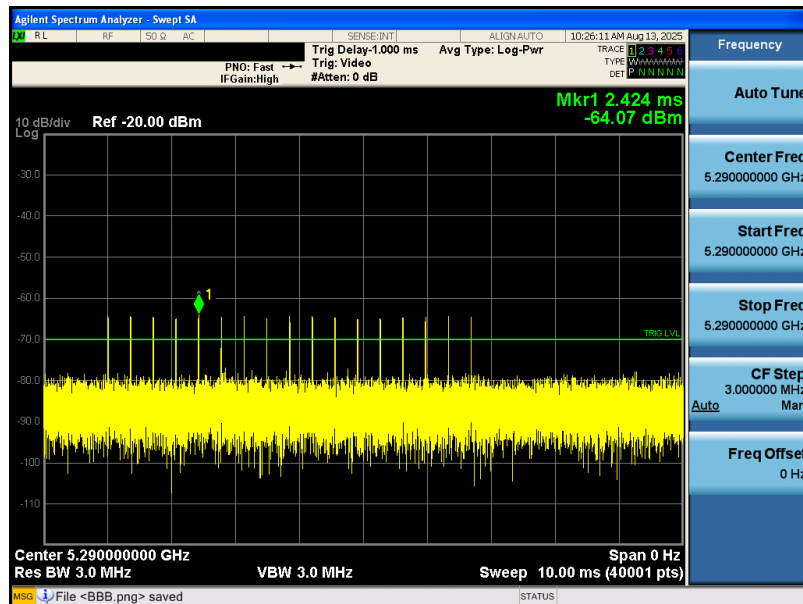


Short Pulse Radar
Type 4

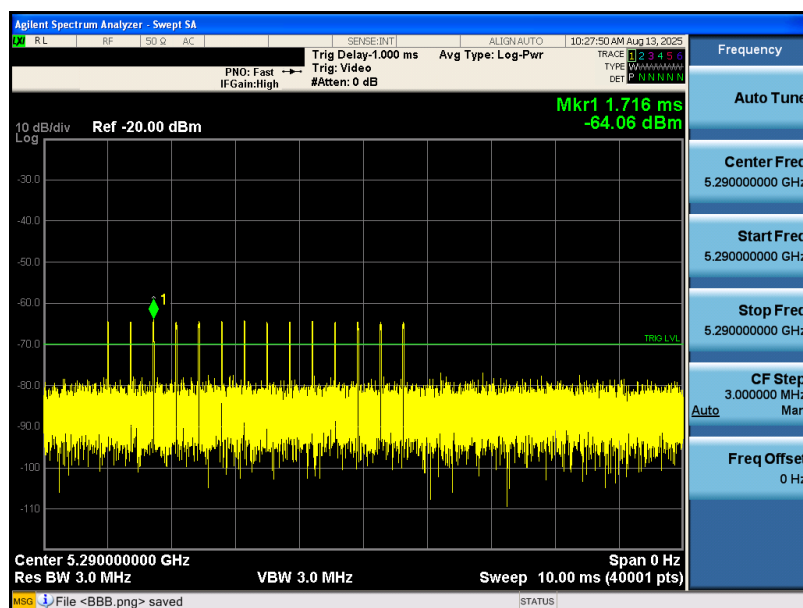


802.11be EHT80_ 5290 MHz

Long Pulse Radar
Type 5

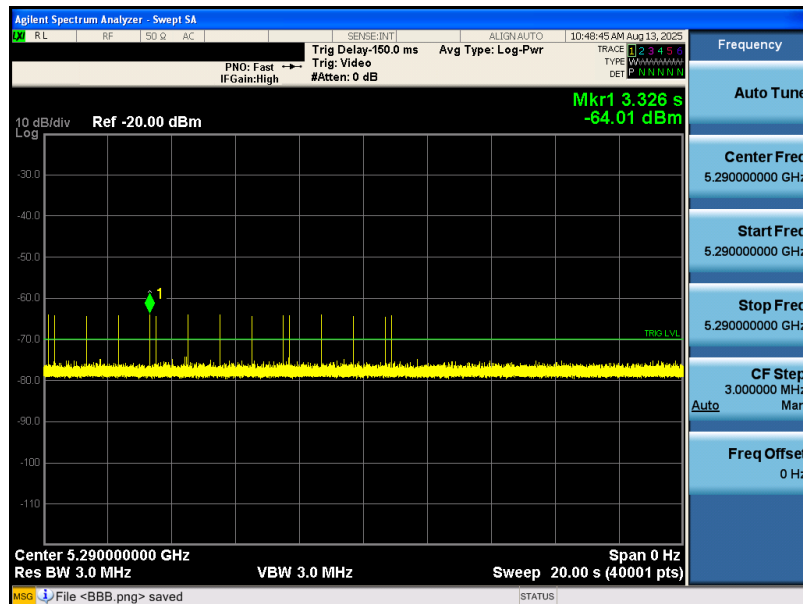


Frequency Hopping
Radar
Type 6

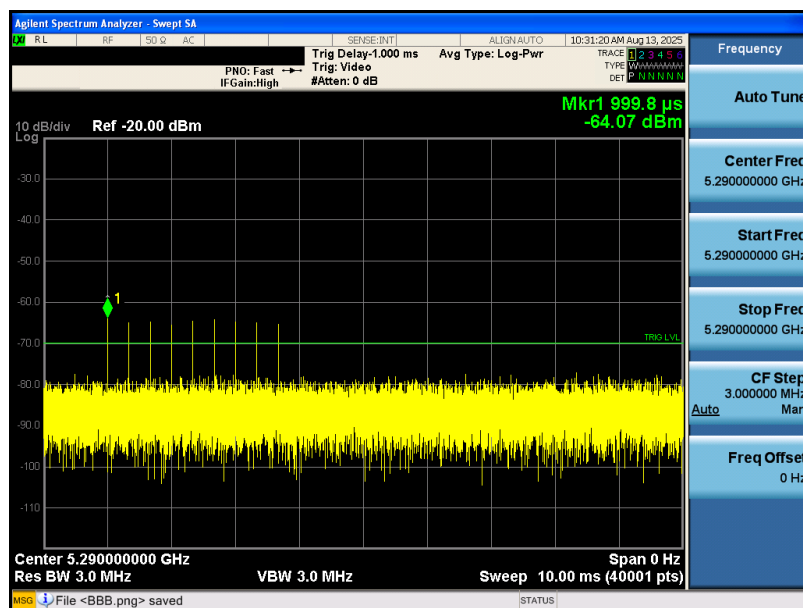


802.11be EHT80_ 5290 MHz

Traffic

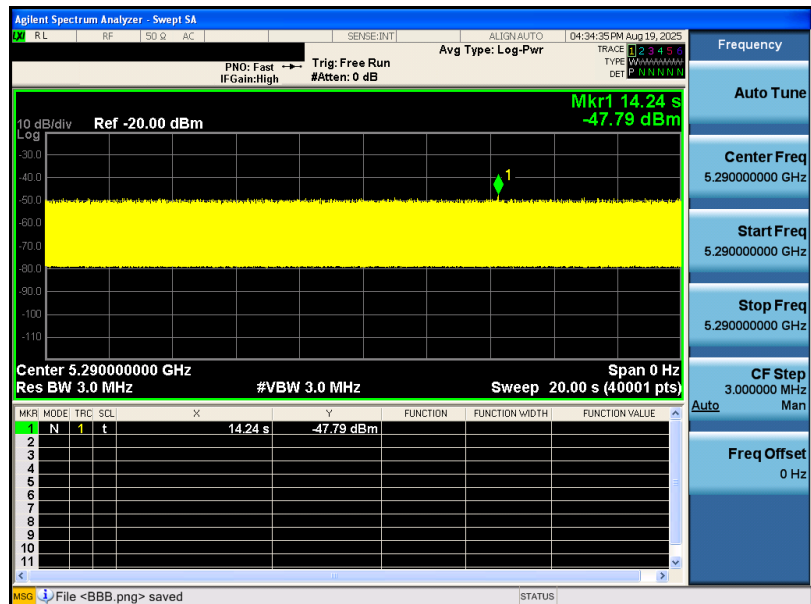


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 0

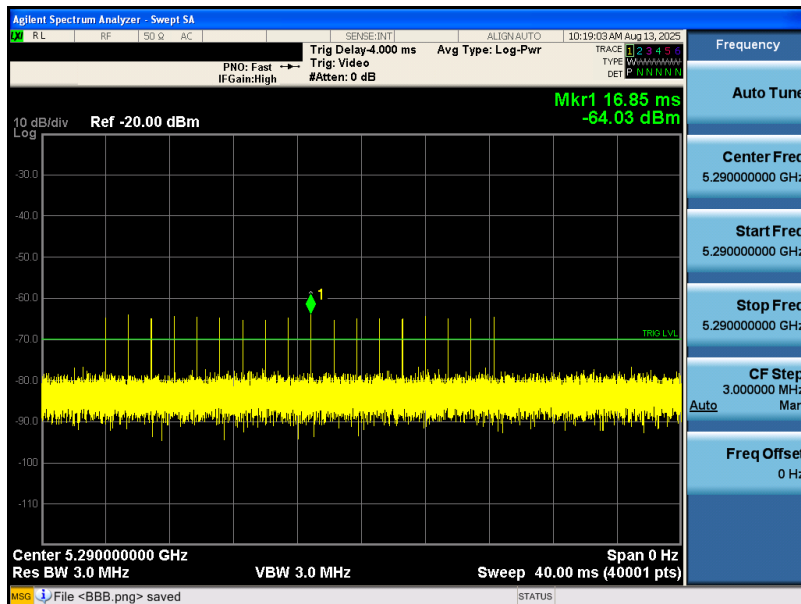


Short Pulse Radar
Type 1A

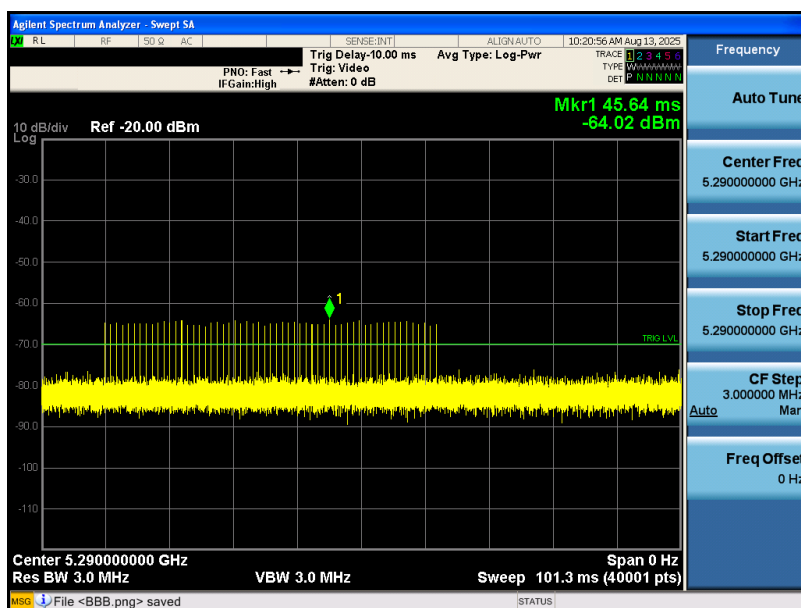


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 1B

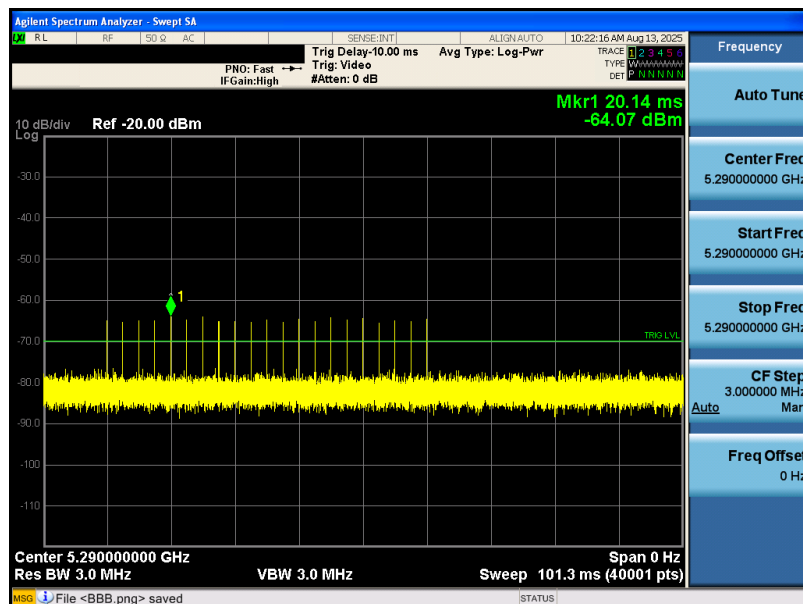


Short Pulse Radar
Type 2

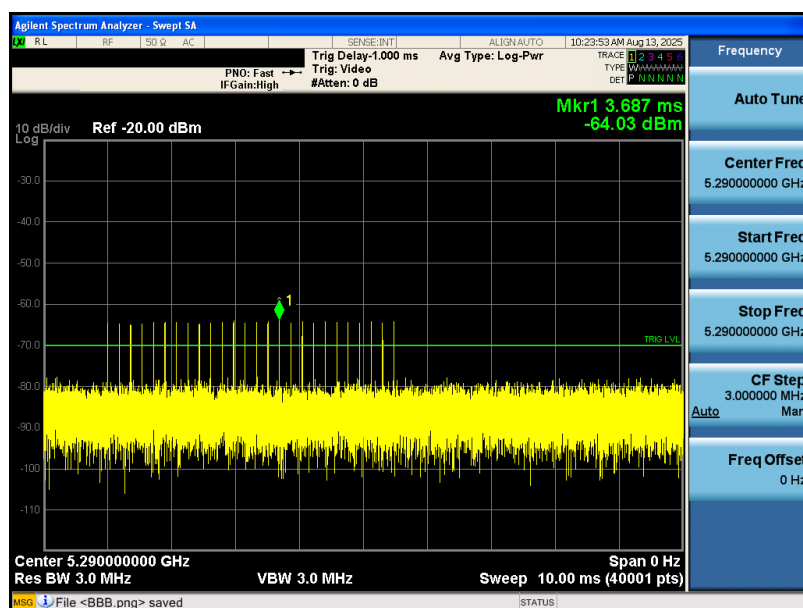


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 3

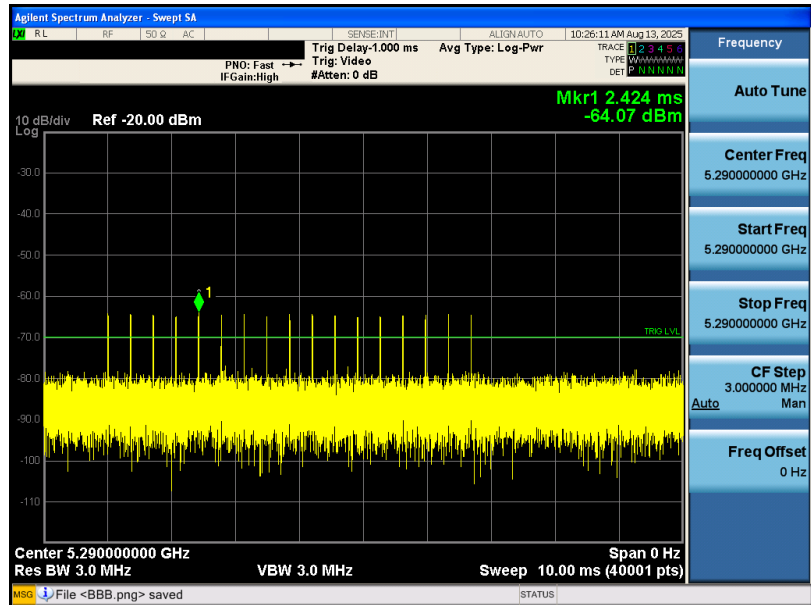


Short Pulse Radar
Type 4

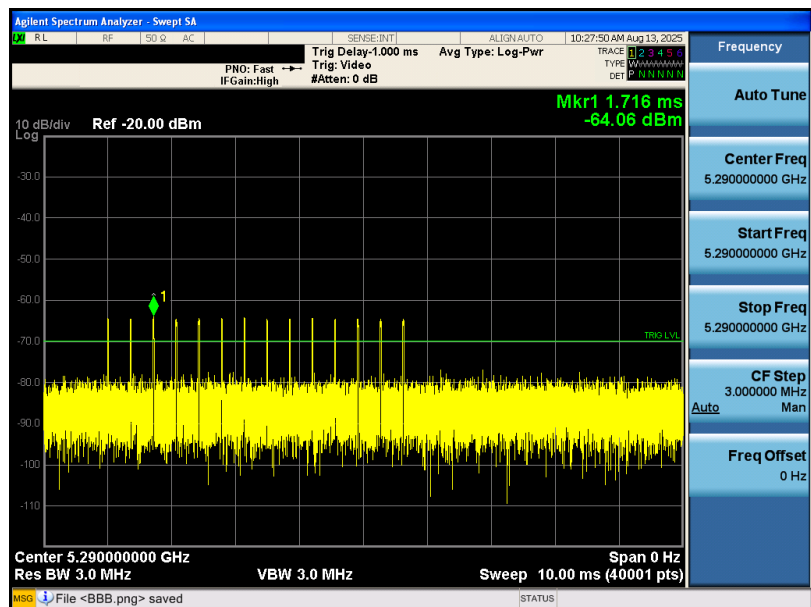


802.11be EHT160_ 5250 MHz

Long Pulse Radar
Type 5

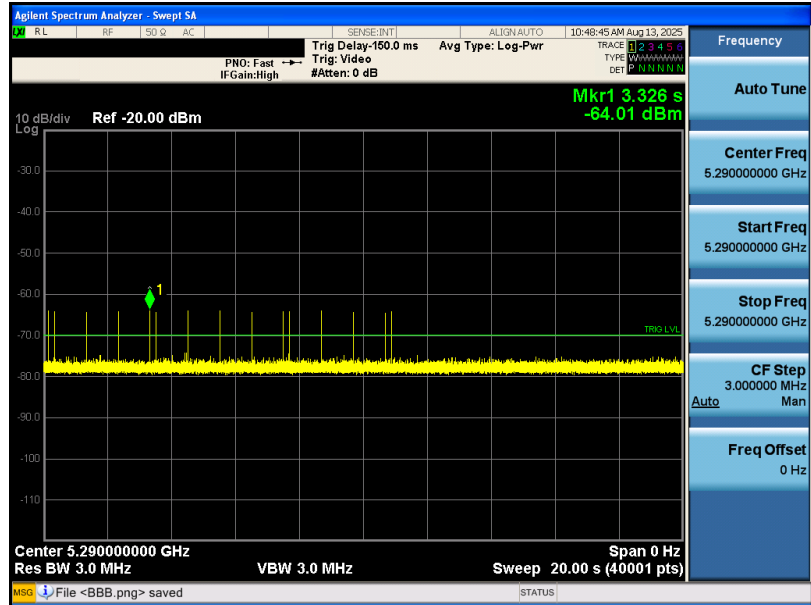


Frequency Hopping
Radar
Type 6

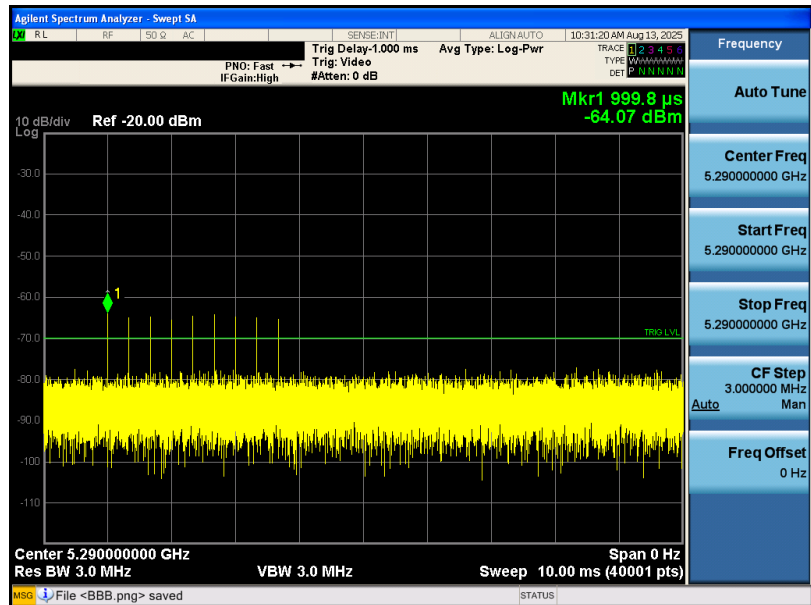

802.11be EHT160_ 5250 MHz


Traffic

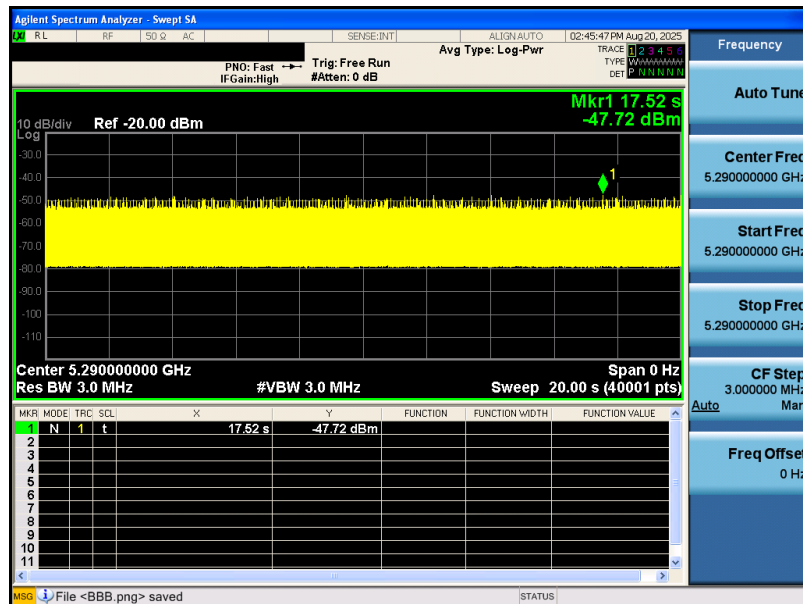

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11be EHT20

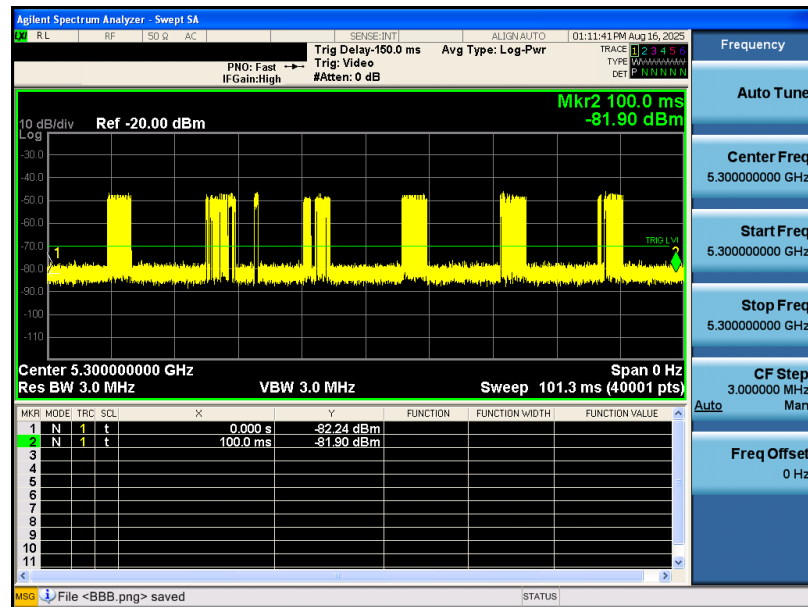

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point: Total Point: Sum of On Time(s):			
7498	39474	19.0ms	
Sweep Time(s): Sweep Point: Duty Cycle(%):			
101.3ms	40001	18.99%	

File <BBB.png> saved

RUN

802.11be EHT40

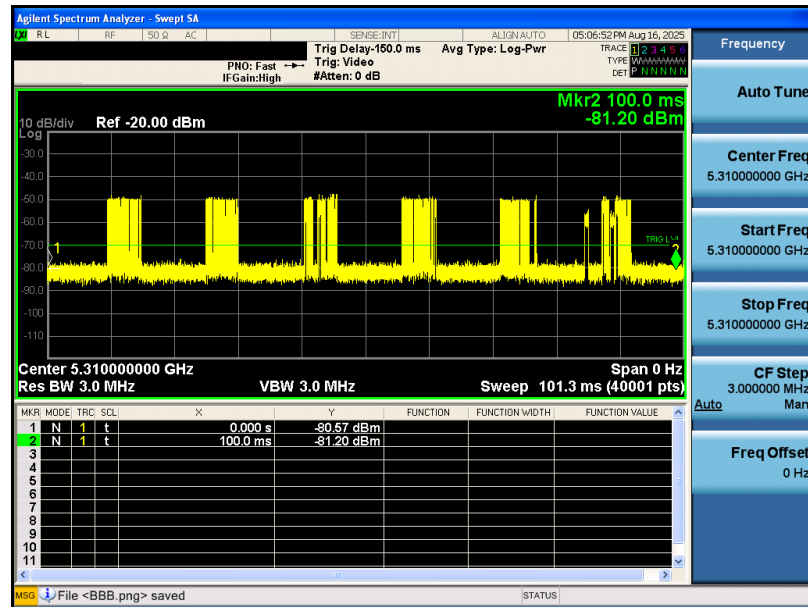


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point:	Total Point:	Sum of On Time(s):	
7294	39474	18.5ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%)	
101.3ms	40001	18.48%	

RUN

802.11be EHT80

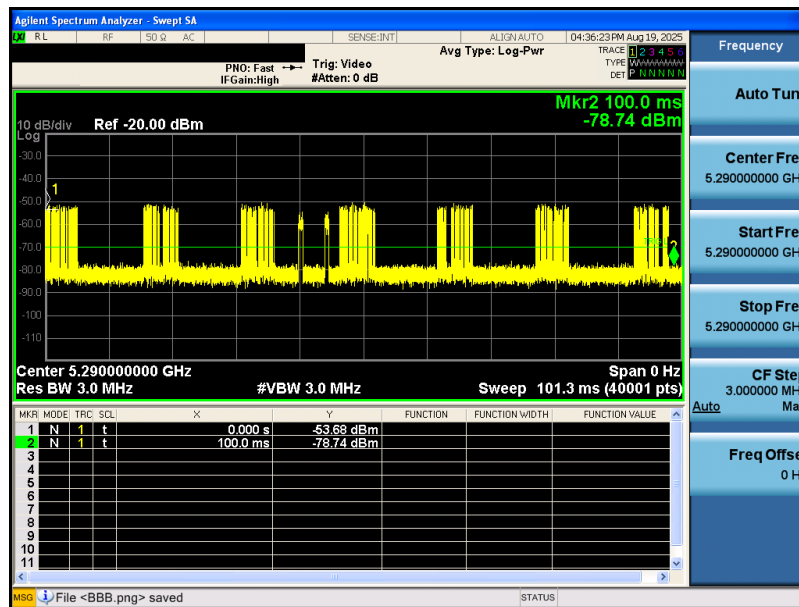

DFS and Adaptivity

Device

Trigger Level(dBm): MK1 Time(s): MK2 Time(s): Delta Time(s):

-70 0 100.0ms 100.0ms

On Time Point: Total Point: Sum of On Time(s):

7419 39474 18.8ms


Sweep Time(s): Sweep Point: Duty Cycle(%):

101.3ms 40001 18.79%

euofins

RUN

802.11be EHT160

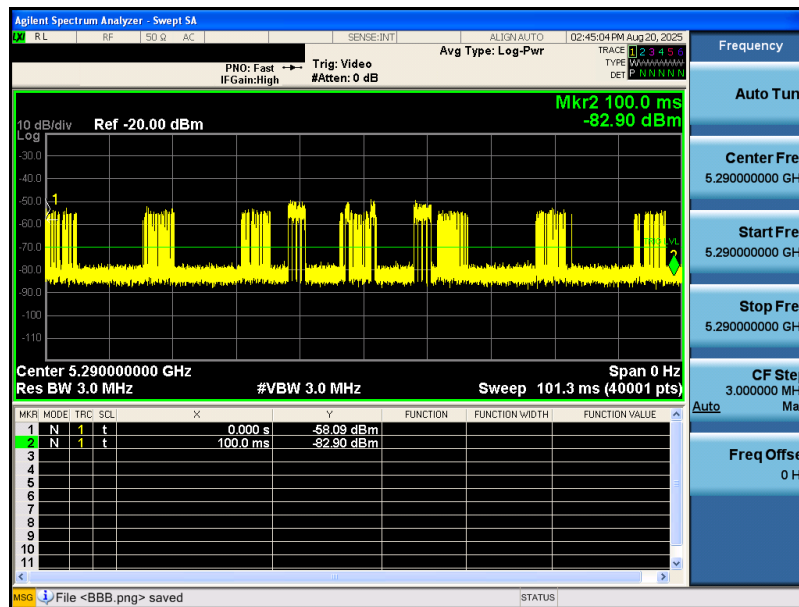

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point:	Total Point:	Sum of On Time(s):	
8058	39474	20.4ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.3ms	40001	20.41%	

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel


802.11be EHT20_ 5300 MHz

Initial Channel
Availability Check


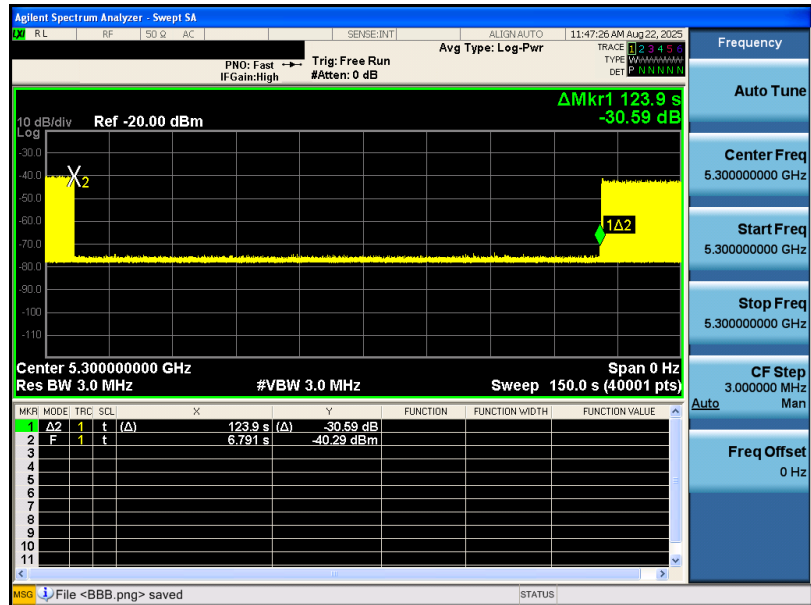


Initial Channel
Availability Check
Begin

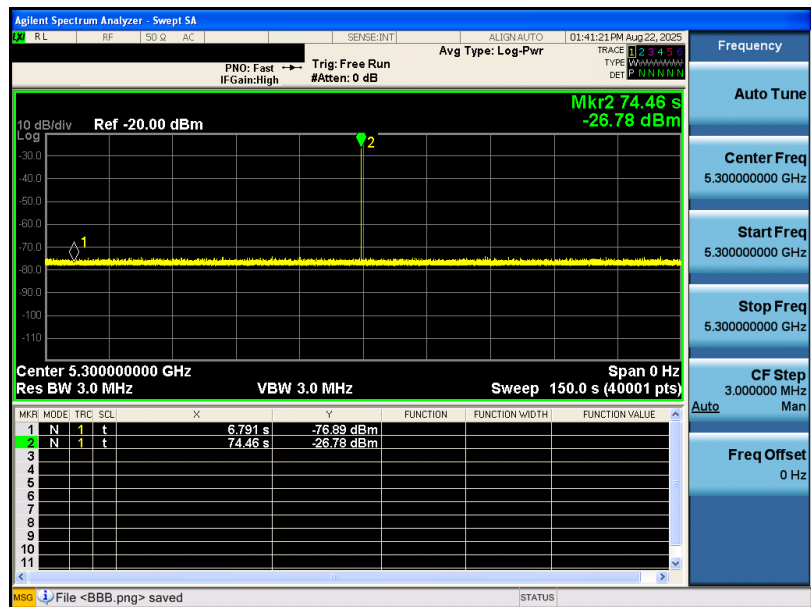

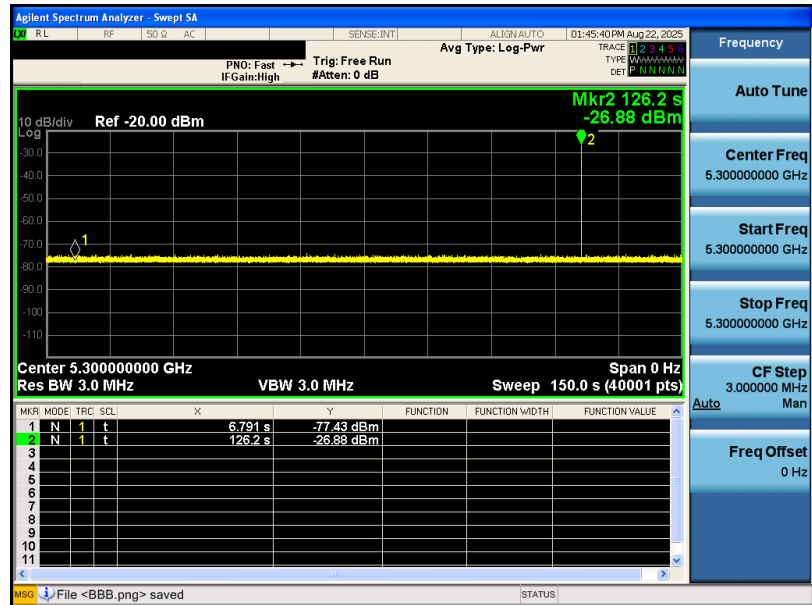

Zero Wait

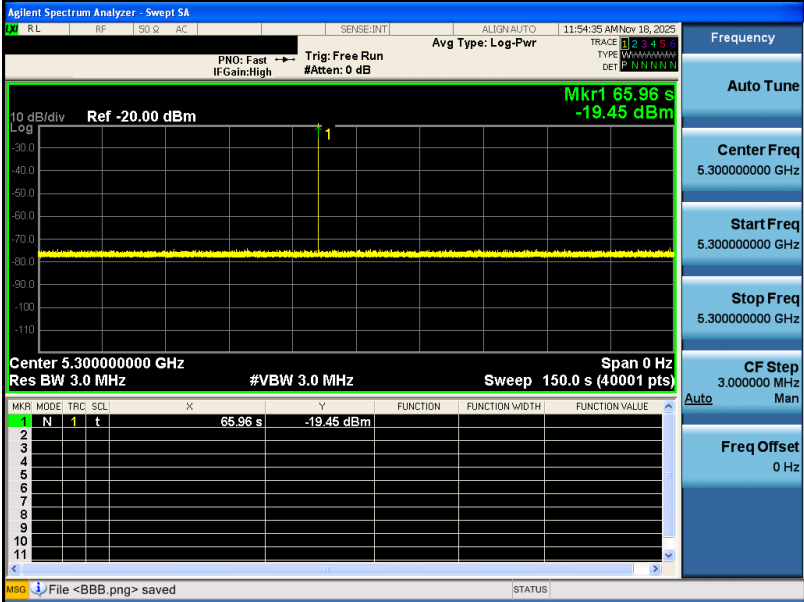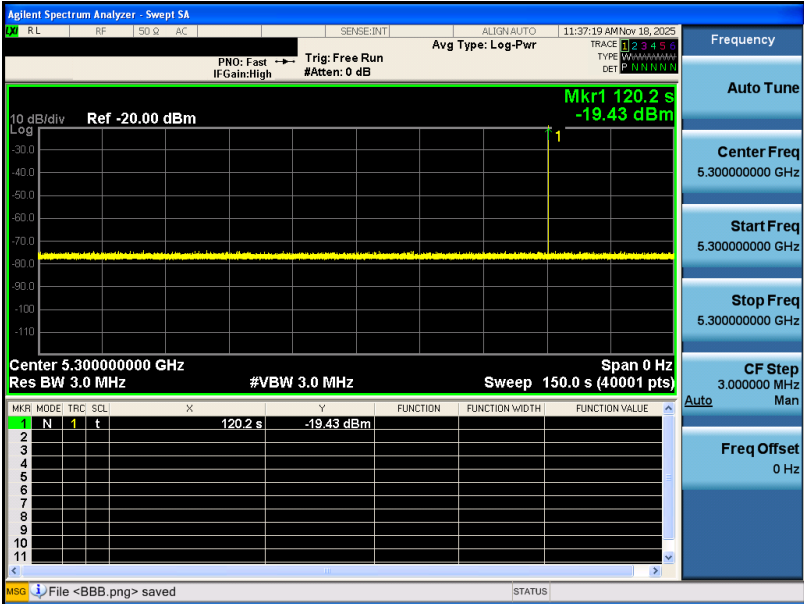802.11be EHT20_ 5300 MHz	
Initial Channel Availability Check Begin	
Initial Channel Availability Check End	

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type0	Table 5a	1	9	1	90.00%	≥ 60%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type0				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5302	1.00	1428.00	18	700	1
2	5302	1.00	1428.00	18	700	1
3	5302	1.00	1428.00	18	700	1
4	5302	1.00	1428.00	18	700	1
5	5302	1.00	1428.00	18	700	0
6	5302	1.00	1428.00	18	700	1
7	5302	1.00	1428.00	18	700	1
8	5302	1.00	1428.00	18	700	1
9	5302	1.00	1428.00	18	700	1
10	5302	1.00	1428.00	18	700	1
Detection Percentage (%)						90.00

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
5250	Type 0	1.0485	10


Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
5250	Type 0	21.9995	60


802.11be EHT160_ 5250 MHz

Channel Move and
Closing Time
(T0~T1)

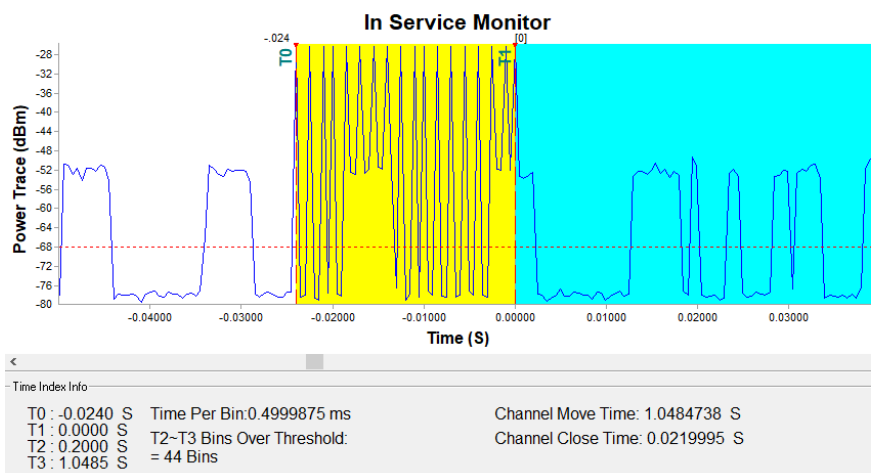


Channel Move and
Closing Time
(T0~T2)

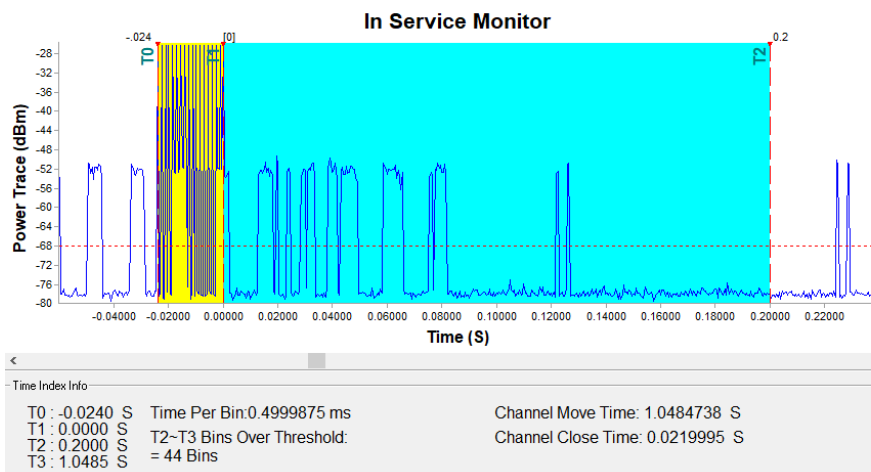

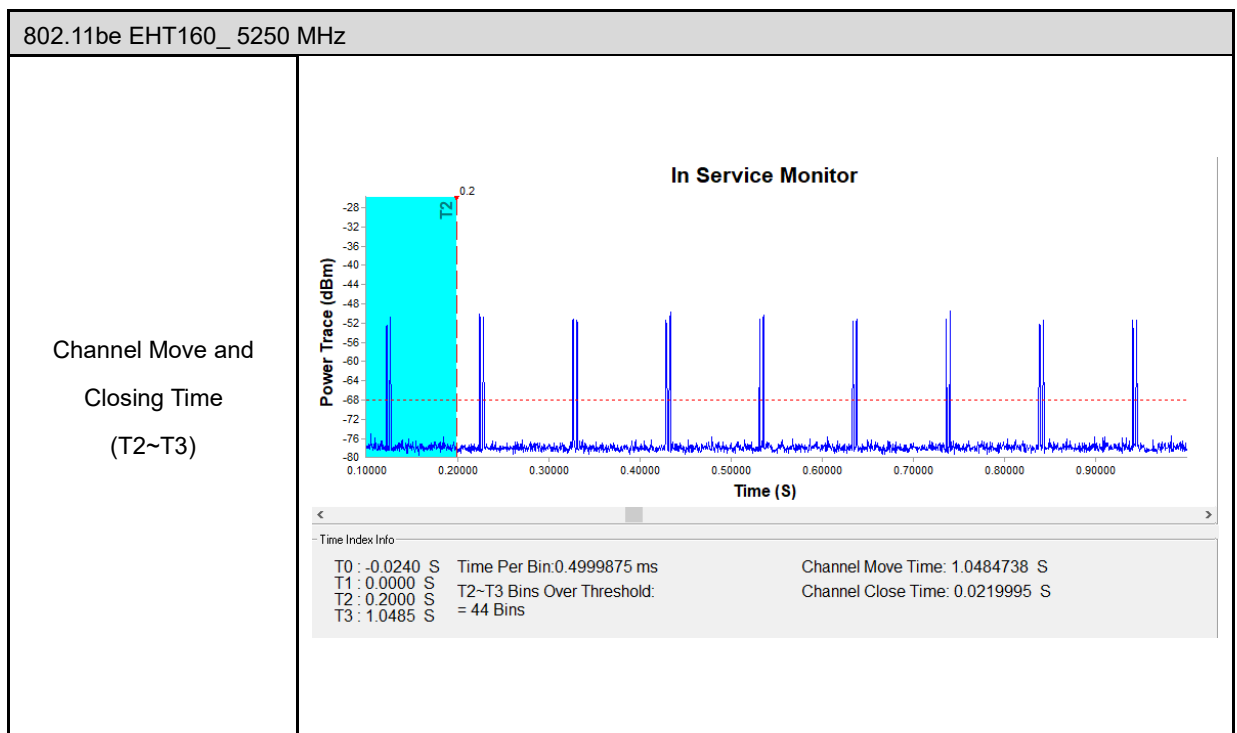

5.5. Non-Occupancy Period

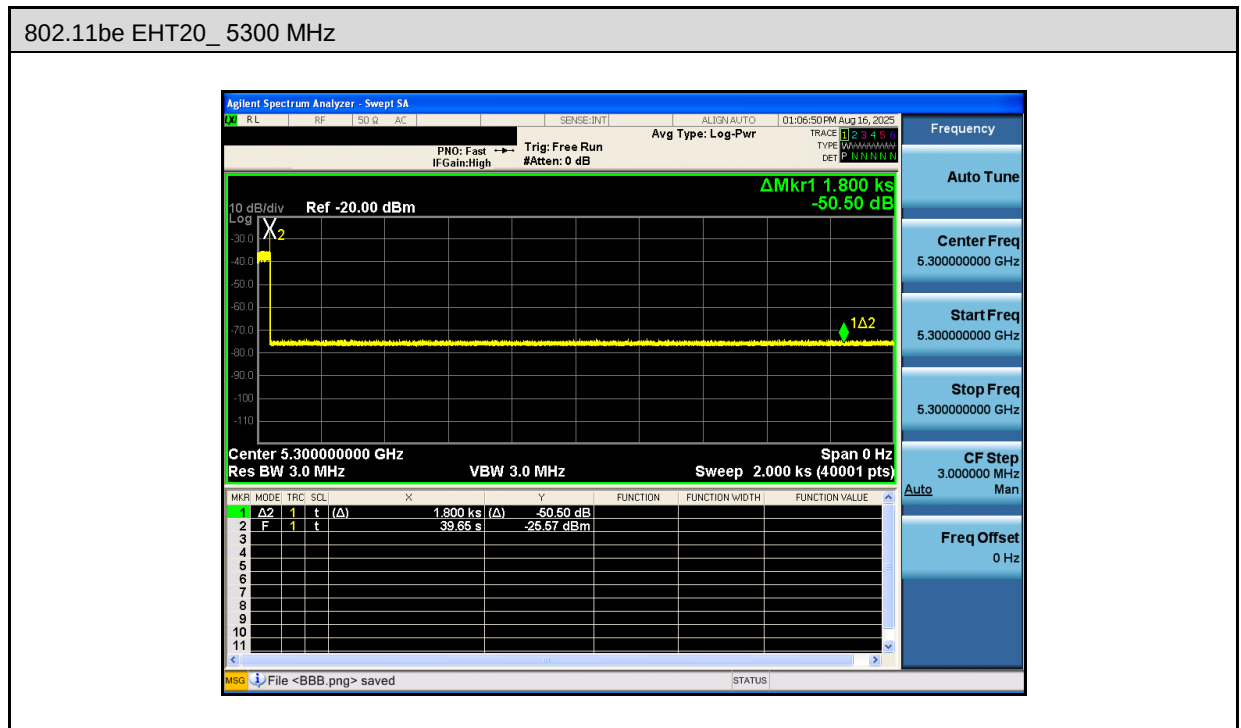

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11be EHT20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	19.128	104.56	≥ 100


Test Mode						
802.11be EHT40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5290	5330	40	36.917	108.35	≥ 100

Test Mode						
802.11be EHT80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	76.758	104.22	≥ 100


Test Mode						
802.11be EHT160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	75.724	105.65	≥ 100

Test Graphs


802.11be EHT20_ 5300 MHz

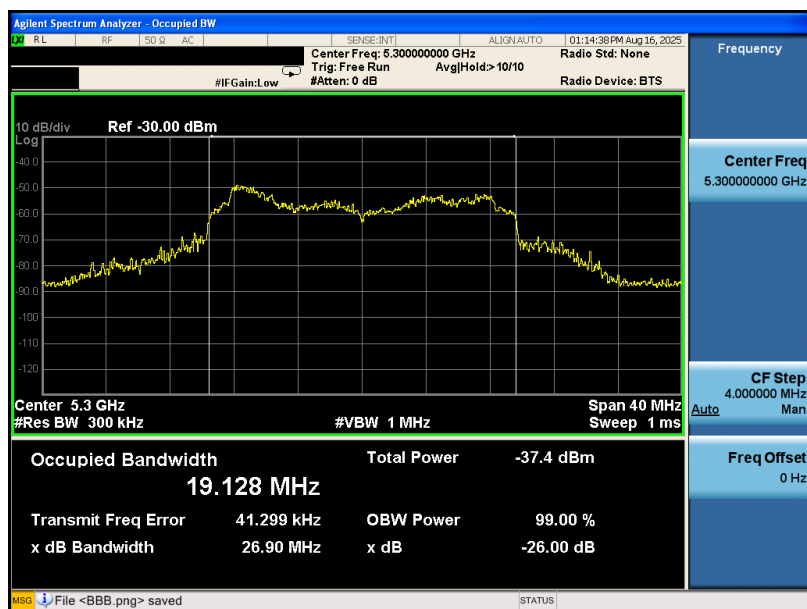


802.11be EHT40_ 5310 MHz

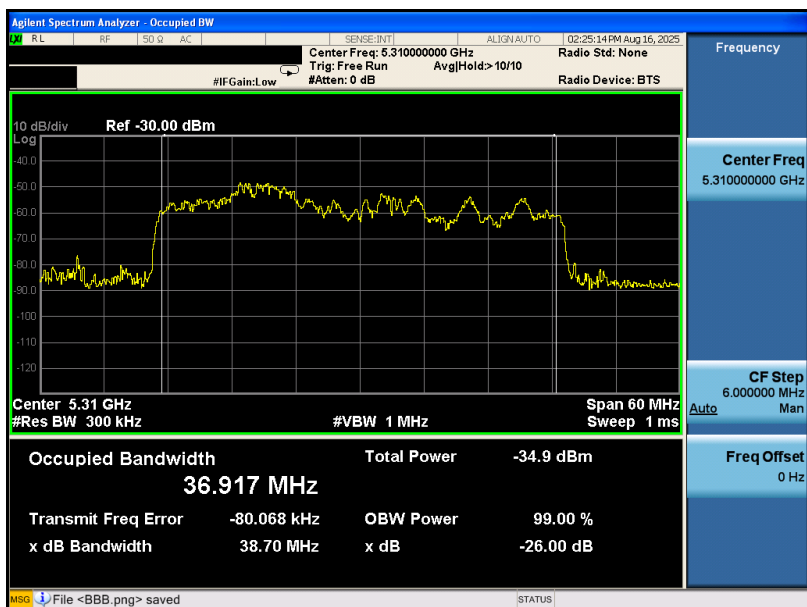

802.11be EHT80_ 5290 MHz

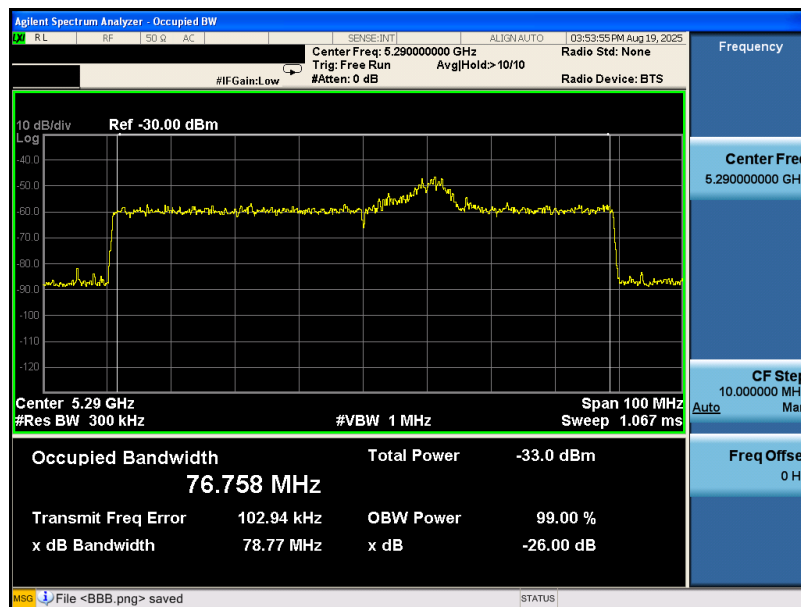

802.11be EHT160_ 5250 MHz

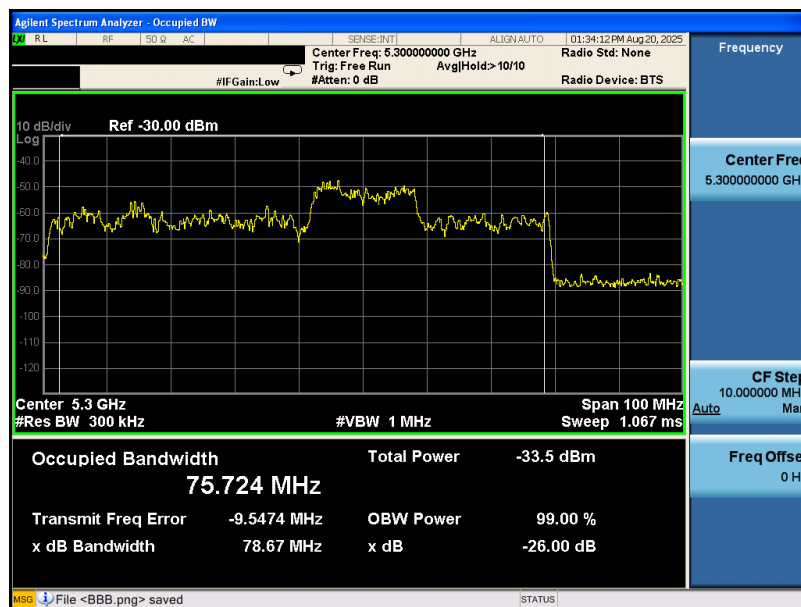

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	30	0	100.00%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	29	1	96.67%	≥ 60%
	Type4	Random	Random	23	7	76.67%	≥ 60%
	Type1~4					90.83%	≥ 80%
	Type5	Random	Random	30	0	100.00%	≥ 80%
	Type6	Hopping	1	27	3	90.00%	≥ 70%

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	30	0	100.00%	≥ 60%
	Type2	Random	Random	24	6	80.00%	≥ 60%
	Type3	Random	Random	24	6	80.00%	≥ 60%
	Type4	Random	Random	24	6	80.00%	≥ 60%
	Type1~4					85.00%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	30	0	100.00%	≥ 60%
	Type2	Random	Random	28	2	93.33%	≥ 60%
	Type3	Random	Random	25	5	83.33%	≥ 60%
	Type4	Random	Random	26	4	86.67%	≥ 60%
	Type1~4					90.83%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	28	2	93.33%	≥ 60%
	Type3	Random	Random	25	5	83.33%	≥ 60%
	Type4	Random	Random	23	7	76.67%	≥ 60%
	Type1~4					86.67%	≥ 80%
	Type5	Random	Random	30	0	100.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	818	65	1222	1
2	5300	1	658	81	1520	1
3	5300	1	818	65	1222	1
4	5300	1	718	74	1393	1
5	5300	1	658	81	1520	1
6	5300	1	718	74	1393	1
7	5300	1	778	68	1285	1
8	5300	1	918	58	1089	1
9	5300	1	518	102	1931	1
10	5300	1	878	61	1139	1
11	5300	1	778	68	1285	1
12	5300	1	798	67	1253	1
13	5300	1	658	81	1520	1
14	5300	1	738	72	1355	1
15	5300	1	738	72	1355	1
16	5300	1	2383	23	420	1
17	5300	1	2494	22	401	1
18	5300	1	1017	52	983	1
19	5300	1	1822	29	549	1
20	5300	1	1192	45	839	1
21	5300	1	1904	28	525	1
22	5300	1	1844	29	542	1
23	5300	1	996	53	1004	1
24	5300	1	2646	20	378	1
25	5300	1	2720	20	368	1
26	5300	1	2809	19	356	1
27	5300	1	1202	44	832	1
28	5300	1	2559	21	391	1
29	5300	1	1887	28	530	1
30	5300	1	1408	38	710	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	2.20	182.60	25	5476	1
2	5300	4.10	179.90	24	5559	1
3	5300	2.40	227.70	26	4392	1
4	5300	4.80	210.50	24	4751	0
5	5300	5.00	225.20	28	4440	1
6	5300	2.30	178.80	26	5593	1
7	5300	3.70	202.40	26	4941	1
8	5300	3.10	214.40	28	4664	1
9	5300	1.90	188.00	29	5319	1
10	5300	2.90	161.50	26	6192	1
11	5300	1.70	177.40	23	5637	1
12	5300	3.90	187.10	26	5345	1
13	5300	4.50	229.70	27	4354	1
14	5300	3.10	163.10	26	6131	1
15	5300	2.10	178.50	27	5602	1
16	5300	3.90	227.30	26	4399	1
17	5300	2.40	163.90	26	6101	1
18	5300	4.50	153.40	26	6519	1
19	5300	3.60	188.80	29	5297	1
20	5300	1.40	177.40	26	5637	0
21	5300	3.10	228.20	26	4382	1
22	5300	4.70	196.80	24	5081	1
23	5300	3.60	156.80	27	6378	1
24	5300	3.90	180.40	25	5543	1
25	5300	4.70	171.00	26	5848	1
26	5300	2.90	213.50	25	4684	1
27	5300	3.00	229.90	25	4350	0
28	5300	3.70	209.00	23	4785	1
29	5300	3.50	177.20	23	5643	1
30	5300	2.80	175.00	28	5714	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	6.10	293.50	18	3407.16	1
2	5300	7.00	470.40	16	2125.85	1
3	5300	7.90	210.50	18	4750.59	1
4	5300	8.10	414.90	16	2410.22	1
5	5300	8.60	347.80	17	2875.22	1
6	5300	8.70	327.90	16	3049.71	1
7	5300	7.50	209.40	16	4775.55	1
8	5300	9.30	468.50	17	2134.47	1
9	5300	6.90	393.40	17	2541.94	1
10	5300	7.00	451.50	17	2214.84	1
11	5300	7.70	314.20	16	3182.69	1
12	5300	9.20	452.50	16	2209.94	1
13	5300	7.80	307.60	16	3250.98	1
14	5300	7.70	286.60	16	3489.18	1
15	5300	8.50	415.30	18	2407.90	1
16	5300	9.40	425.40	16	2350.73	1
17	5300	6.60	207.70	18	4814.64	1
18	5300	8.50	218.40	17	4578.75	1
19	5300	8.60	486.90	16	2053.81	1
20	5300	7.60	287.90	17	3473.43	1
21	5300	7.00	409.90	18	2439.62	1
22	5300	8.00	488.00	17	2049.18	1
23	5300	6.40	345.10	18	2897.71	1
24	5300	8.50	327.90	16	3049.71	1
25	5300	8.50	227.40	18	4397.54	0
26	5300	8.90	460.60	16	2171.08	1
27	5300	6.10	449.20	17	2226.18	1
28	5300	8.50	318.80	18	3136.76	1
29	5300	7.90	400.60	17	2496.26	1
30	5300	6.50	486.20	17	2056.77	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	13.70	292.40	16	3420	1
2	5300	12.60	260.80	13	3834	1
3	5300	13.70	423.10	16	2364	1
4	5300	14.10	313.30	14	3192	1
5	5300	12.20	494.80	13	2021	1
6	5300	11.40	370.70	16	2698	1
7	5300	14.50	394.70	16	2534	1
8	5300	16.20	440.70	13	2269	1
9	5300	11.20	405.60	14	2465	1
10	5300	15.40	376.40	16	2657	0
11	5300	19.60	457.80	13	2184	1
12	5300	17.00	305.50	16	3273	1
13	5300	17.10	252.10	13	3967	1
14	5300	17.00	440.60	12	2270	1
15	5300	17.50	438.70	14	2279	1
16	5300	19.70	388.90	14	2571	1
17	5300	14.70	250.60	12	3990	0
18	5300	14.00	235.00	13	4255	1
19	5300	16.90	207.60	16	4817	1
20	5300	19.90	480.80	12	2080	1
21	5300	15.80	391.60	13	2554	1
22	5300	17.10	215.30	13	4645	0
23	5300	18.60	477.10	12	2096	1
24	5300	11.60	215.90	14	4632	0
25	5300	11.20	436.00	14	2294	1
26	5300	12.50	301.60	16	3316	1
27	5300	19.00	496.10	12	2016	0
28	5300	16.60	219.00	13	4566	0
29	5300	13.60	329.50	16	3035	1
30	5300	14.60	328.00	14	3049	0
Detection Percentage (%)						76.67

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5292	1	90.3	6	1501.2	3	1
	5295	2	95.5	12	1535.0	1	
	5293	3	86.6	7	1332.5	1	
	5295	4	87.4	12	1461.2	3	
	5293	5	61.3	7	1119.2	2	
	5297	6	72.6	17	1529.6	2	
	5292	7	82.2	5	1557.9	1	
	5296	8	59.2	15	1569.7	1	
	5296	9	85.3	16	1810.9	2	
	5296	10	99.0	16	1330.4	2	
	5296	11	86.3	14	1553.0	2	
2	5295	1	69.1	13	1374.0	3	1
	5294	2	56.6	10	1254.9	3	
	5294	3	78.6	10	1694.1	1	
	5292	4	75.3	6	1212.8	2	
	5294	5	77.0	10	1235.0	3	
	5293	6	81.1	7	1486.3	3	
	5293	7	87.6	8	1855.0	1	
	5294	8	74.4	9	1689.8	1	
	5298	9	54.9	19	1220.9	2	
	5293	10	52.8	7	1513.5	2	
	5296	11	54.4	14	1928.0	3	
	5297	12	54.9	18	1599.9	1	
3	5297	1	57.6	18	1734.1	1	1
	5292	2	68.6	5	1541.2	3	
	5296	3	76.7	14	1698.0	3	
	5294	4	62.6	11	1343.6	2	
	5297	5	93.7	18	1503.4	3	
	5294	6	81.3	10	1362.2	1	
	5296	7	99.7	15	1156.0	1	
	5293	8	87.4	8	1883.7	2	
	5297	9	89.3	17	1420.0	3	
	5294	10	63.1	11	1202.7	2	
	5297	11	51.6	17	1681.4	1	
	5294	12	77.6	10	1164.7	2	
	5293	13	87.3	8	1925.3	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5293	1	53.5	8	1987.7	3	1
	5293	2	70.6	7	1424.2	2	
	5295	3	82.1	12	1486.2	3	
	5296	4	81.7	14	1449.9	3	
	5292	5	77.2	6	1136.8	3	
	5298	6	66.4	20	1090.5	1	
	5297	7	99.8	18	1567.7	3	
	5292	8	97.8	5	1371.8	3	
	5296	9	91.1	16	1597.5	1	
5	5296	1	88.1	14	1956.4	2	1
	5295	2	80.2	12	1127.2	2	
	5295	3	95.7	12	1512.5	1	
	5293	4	91.1	7	1983.9	3	
	5296	5	97.2	16	1405.1	3	
	5294	6	67.8	10	1517.0	3	
	5297	7	55.3	17	1407.1	3	
	5296	8	89.8	14	1910.8	1	
	5294	9	65.8	9	1559.4	3	
	5298	10	56.0	20	1126.1	1	
	5296	11	81.6	15	1480.9	2	
	5296	12	72.8	15	1152.8	1	
	5292	13	54.1	6	1850.4	1	
	5297	14	64.6	18	1404.1	3	
	5296	15	53.4	15	1101.3	1	
6	5294	1	92.7	10	1255.1	3	1
	5296	2	55.6	14	1374.2	2	
	5295	3	51.9	13	1766.2	3	
	5295	4	82.2	13	1249.8	2	
	5298	5	76.9	20	1137.3	3	
	5295	6	94.7	12	1338.4	3	
	5297	7	65.5	18	1303.4	2	
	5294	8	66.3	10	1701.1	3	
	5294	9	83.9	10	1853.6	3	
	5296	10	76.4	15	1577.2	3	
	5294	11	99.7	11	1383.9	2	
	5296	12	53.8	14	1012.7	1	
	5296	13	69.1	16	1396.3	2	
	5296	14	54.4	15	1223.0	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5292	1	94.1	6	1820.9	3	1
	5293	2	71.1	8	1449.4	1	
	5297	3	56.1	17	1724.5	3	
	5294	4	72.2	11	1522.3	1	
	5295	5	67.9	12	1569.2	2	
	5294	6	88.0	9	1618.8	1	
	5295	7	62.0	13	1604.7	1	
	5297	8	70.1	17	1088.4	1	
	5296	9	63.0	14	1064.6	1	
	5296	10	57.1	14	1232.0	3	
	5294	11	71.4	10	1722.5	2	
	5294	12	73.8	10	1242.6	3	
	5294	13	55.4	9	1065.6	1	
	5294	14	66.5	10	1893.3	2	
	5296	15	91.9	14	1607.1	2	
	5294	16	50.3	10	1266.8	2	
	5292	17	84.0	5	1971.4	1	
8	5297	1	93.7	18	1516.4	1	1
	5292	2	76.0	6	1853.4	1	
	5292	3	92.5	5	1384.4	2	
	5296	4	65.4	15	1283.6	3	
	5296	5	71.6	14	1687.6	2	
	5292	6	71.5	6	1735.8	2	
	5296	7	88.0	16	1430.5	2	
	5298	8	77.7	19	1129.3	2	
	5295	9	63.5	13	1921.7	2	
	5296	10	71.9	16	1646.3	3	
	5293	11	50.7	8	1877.9	2	
	5295	12	88.2	13	1538.8	1	
	5296	13	84.7	14	1918.0	2	
	5294	14	66.0	9	1178.2	1	
	5298	15	94.4	19	1759.3	3	
	5294	16	72.0	9	1426.6	2	
	5296	17	99.0	15	1320.8	3	
	5295	18	82.5	13	1687.1	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5297	1	58.4	18	1086.3	3	1
	5297	2	65.8	18	1959.3	2	
	5295	3	78.6	13	1104.1	3	
	5294	4	55.1	9	1534.6	3	
	5297	5	53.1	17	1942.4	3	
	5292	6	64.6	6	1112.4	1	
	5297	7	70.9	17	1683.0	1	
	5295	8	54.7	12	1871.0	1	
	5297	9	55.4	17	1845.0	2	
	5298	10	56.1	19	1779.1	2	
	5295	11	90.9	13	1643.1	3	
	5294	12	95.2	9	1743.4	1	
	5295	13	79.2	12	1595.7	3	
	5298	14	61.3	19	1231.6	3	
	5292	15	71.7	5	1522.3	2	
	5294	16	57.6	9	1493.5	3	
	5296	17	68.2	16	1154.7	3	
	5293	18	83.4	7	1396.9	1	
	5294	19	87.6	9	1510.9	3	
10	5297	1	96.8	18	1133.0	1	1
	5293	2	90.7	8	1289.7	2	
	5294	3	50.6	11	1125.1	1	
	5293	4	87.0	7	1099.1	3	
	5296	5	86.1	14	1592.0	2	
	5297	6	91.3	18	1430.2	3	
	5292	7	57.0	6	1693.9	2	
	5298	8	78.9	20	1459.9	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	64.1	16	1937.1	1	1
	5300	2	69.6	6	1283.4	3	
	5300	3	56.0	11	1629.1	3	
	5300	4	51.4	14	1137.8	1	
	5300	5	98.6	12	1118.1	1	
	5300	6	61.7	6	1421.7	1	
	5300	7	64.9	15	1835.4	1	
	5300	8	67.0	12	1048.4	3	
	5300	9	70.5	18	1407.6	3	
	5300	10	89.7	18	1728.8	1	
	5300	11	90.8	14	1445.1	2	
	5300	12	65.0	10	1502.3	1	
	5300	13	99.4	10	1466.6	1	
	5300	14	66.4	16	1121.3	2	
	5300	15	76.4	18	1011.9	2	
	5300	16	76.0	20	1528.5	2	
12	5300	1	85.3	9	1297.0	1	1
	5300	2	66.5	13	1293.5	2	
	5300	3	57.9	10	1292.9	2	
	5300	4	55.1	19	1552.0	1	
	5300	5	69.6	8	1506.8	1	
	5300	6	52.6	6	1896.7	2	
	5300	7	80.2	13	1066.1	1	
	5300	8	97.7	17	1965.5	2	
	5300	9	56.6	18	1629.4	1	
	5300	10	63.4	16	1282.0	1	
	5300	11	97.8	9	1504.8	1	
	5300	12	55.2	14	1155.1	2	
	5300	13	92.5	5	1709.8	2	
	5300	14	59.8	5	1667.9	2	
	5300	15	67.7	19	1442.8	2	
	5300	16	60.9	17	1734.6	1	
	5300	17	93.2	8	1611.3	1	
	5300	18	83.3	17	1612.6	3	
	5300	19	84.9	5	1709.4	2	
	5300	20	56.6	19	1800.1	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	92.3	18	1677.1	2	1
	5300	2	52.5	19	1387.3	2	
	5300	3	93.4	7	1284.2	1	
	5300	4	82.9	11	1896.5	1	
	5300	5	95.4	18	1986.4	3	
	5300	6	98.7	17	1661.2	3	
	5300	7	76.5	18	1772.2	2	
	5300	8	56.2	20	1837.0	3	
	5300	9	54.1	19	1721.9	3	
	5300	10	64.4	13	1652.6	2	
14	5300	1	66.2	20	1025.3	2	1
	5300	2	61.2	6	1199.3	2	
	5300	3	94.3	14	1297.3	1	
	5300	4	86.7	12	1017.9	1	
	5300	5	79.2	9	1380.9	1	
	5300	6	83.7	14	1652.7	2	
	5300	7	64.7	9	1886.5	3	
	5300	8	62.2	6	1483.7	2	
	5300	9	83.9	20	1760.6	2	
	5300	10	74.8	8	1443.9	2	
	5300	11	99.4	9	1868.9	1	
	5300	12	68.2	10	1594.9	1	
	5300	13	72.5	14	1342.5	3	
	5300	14	86.5	12	1311.1	1	
	5300	15	74.7	8	1492.5	2	
	5300	16	65.7	9	1193.2	1	
	5300	17	59.4	16	1400.1	3	
	5300	18	72.9	5	1246.1	1	
	5300	19	59.5	17	1523.6	3	
	5300	20	85.9	16	1678.9	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	83.6	11	1087.8	3	1
	5300	2	82.7	9	1755.1	3	
	5300	3	76.5	6	1184.8	2	
	5300	4	64.2	12	1745.3	3	
	5300	5	60.8	10	1340.9	3	
	5300	6	54.0	13	1661.0	1	
	5300	7	89.6	8	1361.7	1	
	5300	8	51.9	15	1408.4	1	
	5300	9	60.0	17	1161.6	3	
	5300	10	84.6	16	1113.6	3	
	5300	11	93.5	13	1507.7	2	
	5300	12	98.3	10	1582.2	2	
	5300	13	94.4	14	1592.8	3	
	5300	14	57.1	5	1465.0	2	
	5300	15	78.1	5	1436.5	2	
	5300	16	61.9	5	1485.0	3	
	5300	17	91.0	5	1256.1	1	
	5300	18	72.0	16	1084.3	3	
	5300	19	86.8	10	1844.7	1	
16	5300	1	64.9	20	1768.3	2	1
	5300	2	78.7	17	1608.3	1	
	5300	3	77.2	14	1635.3	1	
	5300	4	93.8	17	1216.9	2	
	5300	5	75.5	14	1354.1	2	
	5300	6	60.6	11	1870.2	1	
	5300	7	59.6	7	1987.3	3	
	5300	8	96.7	11	1229.0	1	
	5300	9	87.0	12	1673.2	3	
	5300	10	57.4	12	1077.7	3	
	5300	11	67.7	9	1418.6	2	
	5300	12	93.9	9	1045.2	3	
	5300	13	96.2	16	1896.9	1	
	5300	14	77.0	11	1424.1	2	
	5300	15	65.2	16	1201.0	3	
	5300	16	74.4	6	1484.1	2	
	5300	17	96.3	16	1392.4	1	
	5300	18	89.3	18	1269.1	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	54.7	14	1317.8	3	1
	5300	2	80.4	17	1032.5	1	
	5300	3	63.6	17	1268.3	3	
	5300	4	81.8	12	1656.7	3	
	5300	5	55.1	19	1543.4	3	
	5300	6	51.2	20	1534.5	1	
	5300	7	94.1	17	1774.9	2	
	5300	8	60.5	13	1728.7	1	
	5300	9	80.1	10	1297.2	1	
	5300	10	94.9	12	1212.9	3	
	5300	11	50.3	12	1948.4	2	
	5300	12	54.1	16	1109.3	1	
	5300	13	76.5	18	1246.0	3	
	5300	14	71.7	17	1477.5	2	
	5300	15	97.2	14	1194.1	1	
	5300	16	84.5	15	1632.1	1	
	5300	17	81.5	10	1052.8	2	
18	5300	1	61.0	12	1930.5	2	1
	5300	2	75.1	9	1421.7	1	
	5300	3	71.7	7	1509.9	2	
	5300	4	96.3	19	1474.5	1	
	5300	5	53.7	9	1404.4	2	
	5300	6	52.9	8	1234.4	1	
	5300	7	50.4	6	1499.2	3	
	5300	8	66.0	20	1461.4	1	
	5300	9	63.8	16	1798.9	2	
	5300	10	76.0	11	1805.9	3	
	5300	11	74.7	16	1297.2	2	
	5300	12	60.8	15	1983.0	1	
	5300	13	76.8	11	1927.5	1	
	5300	14	92.2	11	1782.0	1	
	5300	15	97.4	15	1263.0	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	59.9	9	1292.2	3	1
	5300	2	95.6	8	1732.4	1	
	5300	3	99.3	18	1596.0	3	
	5300	4	75.2	14	1550.0	3	
	5300	5	85.1	18	1175.0	2	
	5300	6	90.9	8	1945.3	3	
	5300	7	96.8	8	1663.1	1	
	5300	8	86.2	11	1605.4	1	
	5300	9	89.6	8	1151.8	2	
	5300	10	73.0	6	1623.8	1	
	5300	11	77.9	7	1620.9	3	
	5300	12	89.4	10	1184.6	2	
	5300	13	95.1	16	1474.9	2	
	5300	14	85.8	18	1817.0	3	
20	5300	1	64.7	19	1901.6	1	1
	5300	2	53.9	16	1958.5	3	
	5300	3	68.1	13	1119.4	3	
	5300	4	54.2	17	1034.6	3	
	5300	5	81.6	20	1088.7	3	
	5300	6	72.2	10	1863.7	2	
	5300	7	53.9	13	1091.8	1	
	5300	8	83.1	6	1499.9	3	
	5300	9	70.9	8	1870.4	1	
	5300	10	67.6	19	1742.4	3	
21	5305	1	97.5	13	1641.9	2	1
	5305	2	58.5	12	1244.5	1	
	5304	3	94.7	14	1662.1	3	
	5304	4	98.8	16	1147.0	2	
	5306	5	58.5	10	1260.2	1	
	5306	6	98.4	10	1943.5	1	
	5307	7	56.7	7	1667.7	3	
	5308	8	66.6	6	1777.6	1	
	5306	9	56.7	11	1303.0	1	
	5302	10	66.7	19	1011.3	2	
	5306	11	92.5	10	1085.6	1	
	5305	12	84.2	13	1313.5	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5304	1	82.2	16	1490.1	3	1
	5305	2	83.1	13	1912.0	2	
	5305	3	87.9	13	1387.4	1	
	5304	4	65.3	15	1920.4	3	
	5304	5	59.9	15	1923.2	3	
	5304	6	60.4	16	1383.3	1	
	5304	7	53.0	14	1243.0	2	
	5307	8	69.2	7	1263.5	3	
	5307	9	75.3	7	1672.7	2	
23	5307	1	79.1	8	1691.5	2	1
	5308	2	56.2	6	1453.9	3	
	5305	3	58.0	13	1207.5	1	
	5308	4	85.8	5	1594.0	1	
	5307	5	69.8	8	1307.7	2	
	5307	6	53.9	8	1236.1	2	
	5303	7	50.7	17	1331.2	1	
	5303	8	97.4	18	1964.0	1	
	5306	9	79.6	9	1341.1	3	
	5305	10	69.6	12	1885.0	2	
	5307	11	79.5	8	1082.4	2	
	5305	12	68.7	12	1429.8	3	
	5307	13	55.9	7	1194.0	3	
	5305	14	73.7	13	1464.9	1	
	5305	15	51.6	13	1942.5	3	
24	5305	1	70.0	13	1877.8	3	1
	5305	2	71.9	13	1417.4	3	
	5302	3	51.7	19	1389.5	1	
	5307	4	64.1	8	1875.1	1	
	5302	5	74.7	19	1969.5	3	
	5304	6	75.9	15	1557.1	3	
	5305	7	66.2	12	1667.1	2	
	5307	8	89.4	7	1802.3	3	
	5306	9	91.0	10	1560.0	1	
	5303	10	51.2	17	1756.5	1	
	5306	11	50.7	10	1995.7	2	
	5306	12	89.1	9	1012.1	2	
	5304	13	93.6	15	1046.8	1	
	5306	14	63.4	10	1482.7	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5307	1	63.8	7	1469.2	1	1
	5303	2	73.2	18	1010.0	3	
	5304	3	81.9	15	1322.9	3	
	5305	4	66.3	12	1547.6	1	
	5304	5	50.7	15	1335.6	2	
	5303	6	57.4	17	1632.4	3	
	5305	7	54.4	12	1403.9	1	
	5305	8	76.1	12	1360.8	3	
	5305	9	56.2	12	1037.3	2	
	5305	10	68.1	12	1670.7	1	
	5305	11	69.4	12	1748.9	1	
	5304	12	58.8	16	1536.5	1	
	5306	13	83.0	10	1458.1	3	
	5307	14	79.5	8	1129.6	3	
	5305	15	69.5	13	1876.3	3	
	5308	16	59.0	5	1496.2	2	
	5307	17	78.2	7	1567.2	1	
	5304	18	84.1	15	1571.7	1	
26	5307	1	94.5	7	1870.8	3	1
	5306	2	89.9	11	1061.3	3	
	5305	3	95.2	13	1860.2	1	
	5306	4	80.5	9	1081.3	3	
	5304	5	54.4	15	1246.6	1	
	5304	6	92.9	16	1492.4	1	
	5308	7	83.8	5	1204.3	3	
	5306	8	54.2	10	1990.9	1	
	5304	9	71.5	16	1828.3	2	
	5303	10	83.4	17	1738.0	3	
	5304	11	80.1	15	1423.8	3	
	5305	12	55.4	12	1479.3	1	
	5305	13	67.6	12	1735.2	2	
	5307	14	59.8	7	1038.7	1	
	5307	15	74.4	7	1674.2	2	
	5304	16	53.1	15	1595.5	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5306	1	74.4	11	1694.7	3	1
	5303	2	90.3	17	1184.9	3	
	5302	3	86.4	19	1269.5	3	
	5304	4	91.8	16	1071.1	1	
	5304	5	55.7	14	1494.8	1	
	5307	6	91.0	7	1536.2	2	
	5303	7	61.6	17	1308.9	2	
	5304	8	55.6	16	1010.2	1	
	5305	9	54.4	13	1502.7	2	
	5304	10	78.5	15	1406.0	3	
	5303	11	55.6	18	1663.5	2	
	5305	12	59.1	13	1073.0	2	
	5305	13	79.1	12	1489.6	1	
	5304	14	62.2	16	1584.1	3	
	5304	15	86.0	15	1434.0	3	
	5306	16	65.9	10	1657.5	3	
	5305	17	78.6	12	1977.5	3	
	5303	18	91.2	18	1747.4	3	
	5308	19	85.9	5	1890.8	3	
	5304	20	53.9	16	1450.2	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5306	1	93.7	11	1363.9	1	1
	5306	2	80.9	9	1485.9	2	
	5306	3	91.0	11	1340.7	2	
	5308	4	81.7	6	1711.0	1	
	5305	5	89.1	12	1406.5	3	
	5306	6	69.9	10	1632.1	3	
	5308	7	72.6	6	1583.1	1	
	5306	8	94.6	9	1344.0	1	
	5302	9	51.2	20	1788.0	3	
	5306	10	67.6	9	1691.8	1	
	5308	11	86.8	6	1483.7	1	
	5305	12	99.8	12	1778.2	3	
	5306	13	60.6	9	1830.2	3	
	5308	14	56.0	5	1025.1	3	
	5307	15	79.3	8	1274.4	1	
	5307	16	51.6	8	1689.0	1	
	5308	17	95.9	6	1392.7	1	
	5302	18	99.7	20	1200.2	2	
	5307	19	83.4	8	1601.6	1	
	5306	20	77.8	11	1297.9	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5304	1	61.9	16	1097.7	1	1
	5302	2	91.2	19	1378.2	3	
	5304	3	79.4	15	1369.3	2	
	5307	4	52.0	8	1992.7	1	
	5303	5	88.8	17	1383.3	2	
	5304	6	78.4	16	1097.9	2	
	5304	7	63.2	14	1775.2	2	
	5304	8	89.7	15	1026.2	1	
	5307	9	65.0	8	1379.0	3	
	5302	10	56.9	19	1903.8	2	
	5307	11	74.1	8	1138.0	1	
	5304	12	92.2	16	1675.2	1	
	5307	13	51.4	7	1589.6	3	
	5304	14	81.0	15	1409.4	3	
	5306	15	84.0	9	1486.7	3	
	5303	16	66.2	17	1562.1	3	
	5307	17	60.3	8	1897.3	1	
30	5304	1	71.9	15	1864.4	1	1
	5302	2	53.2	20	1341.2	2	
	5304	3	68.3	16	1410.2	3	
	5308	4	98.0	6	1991.7	3	
	5303	5	64.0	17	1939.6	3	
	5308	6	64.3	5	1369.5	1	
	5304	7	76.5	16	1361.8	1	
	5305	8	79.2	13	1873.6	3	
	5307	9	95.4	8	1399.1	1	
	5306	10	74.2	11	1214.6	2	
	5307	11	69.8	8	1111.3	3	
	5306	12	62.2	11	1758.7	1	
	5305	13	91.5	12	1059.4	2	
	5307	14	81.5	7	1147.8	3	
Detection Percentage (%)							100.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	0
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	0
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	0
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	598	89	1672	1
2	5310	1	618	86	1618	1
3	5310	1	838	63	1193	1
4	5310	1	778	68	1285	1
5	5310	1	918	58	1089	1
6	5310	1	678	78	1475	1
7	5310	1	738	72	1355	1
8	5310	1	518	102	1931	1
9	5310	1	638	83	1567	1
10	5310	1	518	102	1931	1
11	5310	1	798	67	1253	1
12	5310	1	558	95	1792	1
13	5310	1	778	68	1285	1
14	5310	1	778	68	1285	1
15	5310	1	698	76	1433	1
16	5310	1	2508	22	399	1
17	5310	1	1352	40	740	1
18	5310	1	1850	29	541	1
19	5310	1	2517	21	397	1
20	5310	1	2846	19	351	1
21	5310	1	2140	25	467	1
22	5310	1	2970	18	337	1
23	5310	1	1499	36	667	1
24	5310	1	899	59	1112	1
25	5310	1	1864	29	536	1
26	5310	1	2829	19	353	1
27	5310	1	661	80	1513	1
28	5310	1	1023	52	978	1
29	5310	1	1328	40	753	1
30	5310	1	2522	21	397	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	4.00	213.00	29	4695	1
2	5310	4.70	183.10	23	5461	1
3	5310	1.40	226.30	24	4419	0
4	5310	4.70	170.90	27	5851	1
5	5310	2.80	184.80	26	5411	0
6	5310	3.50	207.40	29	4822	0
7	5310	4.90	187.50	26	5333	1
8	5310	2.10	203.10	25	4924	1
9	5310	4.50	207.80	28	4812	0
10	5310	2.00	179.30	25	5577	1
11	5310	1.80	157.60	24	6345	1
12	5310	4.00	157.00	29	6369	1
13	5310	2.80	209.00	27	4785	0
14	5310	2.70	188.20	23	5313	1
15	5310	2.40	225.20	23	4440	0
16	5310	4.20	227.10	27	4403	1
17	5310	1.90	224.90	29	4446	1
18	5310	3.60	178.00	26	5618	1
19	5310	2.20	178.60	25	5599	1
20	5310	4.20	180.30	29	5546	1
21	5310	2.90	159.40	27	6274	1
22	5310	1.20	167.40	29	5974	1
23	5310	1.80	219.30	28	4560	1
24	5310	1.50	195.10	27	5126	1
25	5310	1.80	218.90	26	4568	1
26	5310	2.30	169.20	24	5910	1
27	5310	3.50	199.00	25	5025	1
28	5310	1.80	219.40	24	4558	1
29	5310	2.70	211.00	25	4739	1
30	5310	4.20	218.10	26	4585	1
Detection Percentage (%)						80.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	7.40	430.80	18	2321.26	1
2	5310	7.80	388.10	18	2576.66	1
3	5310	7.80	428.50	18	2333.72	1
4	5310	7.60	466.00	17	2145.92	1
5	5310	8.70	425.00	18	2352.94	1
6	5310	9.30	370.40	18	2699.78	1
7	5310	8.50	284.90	17	3510.00	1
8	5310	8.30	499.10	18	2003.61	1
9	5310	9.90	473.10	16	2113.72	1
10	5310	9.20	283.80	18	3523.61	1
11	5310	9.90	430.40	16	2323.42	1
12	5310	6.80	278.60	16	3589.38	1
13	5310	6.30	483.10	17	2069.96	1
14	5310	8.20	437.40	16	2286.24	0
15	5310	8.50	492.10	18	2032.11	1
16	5310	8.50	322.50	16	3100.78	1
17	5310	7.10	348.20	16	2871.91	0
18	5310	8.80	411.10	16	2432.50	0
19	5310	9.90	365.70	18	2734.48	1
20	5310	6.30	403.70	17	2477.09	1
21	5310	9.10	440.20	16	2271.69	0
22	5310	8.20	405.80	18	2464.27	1
23	5310	8.10	332.60	16	3006.61	0
24	5310	6.90	467.00	18	2141.33	1
25	5310	7.50	260.70	18	3835.83	1
26	5310	6.30	257.10	18	3889.54	0
27	5310	9.10	296.00	16	3378.38	1
28	5310	9.30	303.20	18	3298.15	1
29	5310	6.90	414.20	18	2414.29	1
30	5310	6.10	251.80	17	3971.41	1
Detection Percentage (%)						80.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	12.40	211.90	15	4719	1
2	5310	12.50	463.20	15	2159	1
3	5310	17.60	346.10	14	2889	0
4	5310	13.90	386.00	12	2591	1
5	5310	18.70	245.20	14	4078	1
6	5310	14.30	417.80	12	2393	1
7	5310	12.90	447.10	16	2237	1
8	5310	11.70	443.20	12	2256	1
9	5310	15.70	318.50	12	3140	1
10	5310	12.50	363.40	13	2752	1
11	5310	12.00	297.60	16	3360	1
12	5310	20.00	213.50	12	4684	1
13	5310	16.50	409.80	14	2440	0
14	5310	13.30	391.90	13	2552	1
15	5310	18.70	481.60	15	2076	1
16	5310	11.00	366.60	13	2728	0
17	5310	19.30	229.20	13	4363	1
18	5310	12.80	376.80	14	2654	1
19	5310	11.20	392.80	14	2546	1
20	5310	15.30	389.50	13	2567	1
21	5310	16.10	418.20	15	2391	0
22	5310	19.10	404.40	14	2473	0
23	5310	16.50	208.10	13	4805	0
24	5310	16.30	479.10	16	2087	1
25	5310	17.40	451.60	12	2214	1
26	5310	17.40	275.70	14	3627	1
27	5310	14.00	425.30	15	2351	1
28	5310	17.80	338.90	16	2951	1
29	5310	18.20	240.10	16	4165	1
30	5310	17.80	469.50	15	2130	1
Detection Percentage (%)						80.00

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5295.5	1	88.9	9	1280.6	1	0
	5297.5	2	97.7	14	1907.9	1	
	5297.5	3	99.5	15	1258.7	1	
	5298.5	4	50.8	17	1774.3	3	
	5293.5	5	67.2	5	1348.4	3	
	5299.5	6	58.0	20	1508.1	1	
	5299.5	7	94.4	19	1780.0	3	
	5298.5	8	83.5	18	1614.3	2	
	5296.5	9	72.9	12	1988.1	2	
	5298.5	10	54.7	18	1794.2	3	
	5294.5	11	68.4	8	1757.2	3	
2	5299.5	1	72.2	19	1841.1	2	1
	5296.5	2	50.1	13	1097.1	3	
	5296.5	3	53.0	12	1347.6	3	
	5295.5	4	87.5	9	1817.7	2	
	5298.5	5	52.1	18	1324.2	2	
	5298.5	6	67.8	18	1387.2	1	
	5298.5	7	68.4	18	1702.4	2	
	5294.5	8	77.6	7	1050.7	2	
	5297.5	9	71.7	14	1861.8	1	
	5294.5	10	99.0	8	1749.3	1	
	5296.5	11	80.3	13	1851.1	3	
	5297.5	12	84.2	16	1925.4	3	
3	5299.5	1	89.0	19	1751.0	1	1
	5296.5	2	95.5	12	1495.9	3	
	5295.5	3	95.9	11	1552.1	1	
	5296.5	4	87.3	13	1244.7	2	
	5293.5	5	62.2	6	1777.1	2	
	5297.5	6	66.4	16	1904.1	3	
	5295.5	7	51.7	11	1241.2	2	
	5295.5	8	53.2	10	1402.5	1	
	5295.5	9	87.2	10	1674.0	1	
	5295.5	10	71.0	11	1533.9	3	
	5297.5	11	80.1	15	1859.1	3	
	5295.5	12	67.6	11	1570.2	3	
	5297.5	13	95.4	14	1332.1	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5294.5	1	57.7	8	1854.8	1	1
	5296.5	2	96.1	12	1799.5	3	
	5297.5	3	85.6	15	1495.7	1	
	5293.5	4	97.5	6	1234.9	2	
	5293.5	5	85.1	5	1432.8	3	
	5295.5	6	53.1	9	1614.5	1	
	5296.5	7	83.8	13	1605.8	2	
	5296.5	8	71.9	12	1621.7	1	
	5297.5	9	66.9	16	1355.5	3	
5	5298.5	1	92.7	18	1685.2	3	1
	5299.5	2	65.6	19	1418.5	3	
	5298.5	3	54.2	17	1424.2	1	
	5294.5	4	61.0	8	1016.9	3	
	5296.5	5	50.1	13	1306.9	1	
	5296.5	6	75.3	13	1624.7	2	
	5293.5	7	77.3	6	1298.5	2	
	5293.5	8	76.1	5	1329.1	1	
	5299.5	9	85.4	20	1536.1	2	
	5294.5	10	69.1	7	1658.5	3	
	5295.5	11	76.3	9	1209.3	2	
	5295.5	12	50.6	10	1483.1	1	
	5297.5	13	86.4	14	1330.4	2	
	5298.5	14	68.3	18	1961.0	2	
	5297.5	15	94.5	14	1418.2	3	
6	5296.5	1	66.8	12	1466.3	2	1
	5298.5	2	86.6	18	1419.0	3	
	5294.5	3	61.1	7	1397.2	2	
	5296.5	4	60.7	13	1765.8	1	
	5299.5	5	76.4	19	1468.0	2	
	5293.5	6	78.6	5	1007.1	3	
	5294.5	7	73.5	7	1493.0	2	
	5296.5	8	92.5	13	1840.1	2	
	5299.5	9	54.3	19	1121.5	3	
	5295.5	10	66.7	11	1761.6	1	
	5297.5	11	84.8	16	1017.9	3	
	5293.5	12	81.0	6	1594.8	2	
	5293.5	13	58.1	5	1186.6	1	
	5298.5	14	95.8	17	1966.3	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5297.5	1	55.0	15	1557.9	1	1
	5295.5	2	59.1	10	1530.7	2	
	5293.5	3	94.9	5	1044.2	2	
	5296.5	4	91.9	13	1207.2	3	
	5293.5	5	99.8	6	1708.0	3	
	5297.5	6	74.3	16	1041.2	1	
	5295.5	7	84.4	11	1311.8	1	
	5294.5	8	62.7	8	1424.1	2	
	5294.5	9	82.2	7	1745.8	2	
	5299.5	10	94.7	20	1551.6	3	
	5296.5	11	77.9	13	1863.0	3	
	5298.5	12	76.0	17	1810.6	2	
	5294.5	13	89.1	7	1216.2	2	
	5293.5	14	76.1	5	1520.1	3	
	5297.5	15	53.5	16	1272.4	3	
	5298.5	16	59.3	17	1660.4	3	
	5293.5	17	72.0	6	1495.5	3	
8	5298.5	1	78.8	17	1198.6	1	1
	5298.5	2	69.3	17	1602.1	3	
	5296.5	3	52.1	13	1477.4	1	
	5297.5	4	99.4	14	1132.4	2	
	5293.5	5	54.8	6	1963.4	3	
	5299.5	6	68.2	19	1665.4	2	
	5293.5	7	52.8	6	1147.6	1	
	5299.5	8	54.5	20	1035.1	1	
	5295.5	9	52.9	11	1619.6	1	
	5293.5	10	59.4	6	1261.9	3	
	5295.5	11	54.4	11	1567.3	2	
	5297.5	12	60.5	16	1952.2	3	
	5294.5	13	70.8	7	1752.8	2	
	5295.5	14	66.9	11	1508.2	3	
	5299.5	15	75.0	20	1076.7	2	
	5295.5	16	54.0	10	1669.7	2	
	5296.5	17	80.0	13	1093.1	2	
	5297.5	18	64.2	15	1188.9	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5295.5	1	66.3	10	1879.1	1	1
	5298.5	2	77.9	18	1093.9	1	
	5299.5	3	58.0	20	1239.0	3	
	5294.5	4	77.3	7	1767.7	3	
	5294.5	5	73.2	8	1221.5	2	
	5297.5	6	59.2	16	1646.0	3	
	5297.5	7	82.0	16	1835.9	3	
	5294.5	8	53.8	8	1783.7	1	
	5294.5	9	96.8	7	1815.4	2	
	5293.5	10	61.5	6	1678.1	3	
	5297.5	11	98.4	14	1321.6	3	
	5298.5	12	66.1	17	1415.1	2	
	5297.5	13	83.7	16	1134.3	2	
	5293.5	14	61.6	5	1704.2	1	
	5293.5	15	60.7	5	1405.5	2	
	5294.5	16	69.3	7	1553.8	3	
	5295.5	17	69.1	10	1291.2	3	
	5298.5	18	81.7	18	1371.6	3	
	5297.5	19	95.9	16	1721.5	3	
10	5295.5	1	73.4	10	1315.1	2	1
	5298.5	2	73.6	18	1030.1	3	
	5295.5	3	70.5	9	1013.8	3	
	5295.5	4	63.1	11	1027.8	2	
	5296.5	5	75.1	12	1500.1	1	
	5297.5	6	50.4	15	1833.5	1	
	5295.5	7	82.9	9	1196.5	2	
	5295.5	8	65.8	10	1098.2	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	71.9	15	1754.4	3	1
	5310	2	88.1	19	1903.8	1	
	5310	3	74.1	16	1021.7	1	
	5310	4	96.0	20	1209.2	2	
	5310	5	86.0	14	1726.2	2	
	5310	6	85.9	6	1552.6	3	
	5310	7	83.5	16	1138.9	1	
	5310	8	61.3	12	1815.9	3	
	5310	9	89.9	15	1977.0	1	
	5310	10	75.9	8	1733.1	3	
	5310	11	61.8	10	1391.7	2	
	5310	12	86.0	5	1437.6	1	
	5310	13	90.8	15	1429.7	3	
	5310	14	89.9	18	1479.9	2	
	5310	15	58.7	16	1087.6	1	
	5310	16	72.7	11	1623.3	3	
12	5310	1	97.9	6	1526.4	2	1
	5310	2	89.0	14	1212.9	3	
	5310	3	74.8	19	1865.6	2	
	5310	4	65.5	10	1280.0	3	
	5310	5	84.8	19	1055.8	1	
	5310	6	65.3	19	1012.9	3	
	5310	7	97.5	8	1548.3	2	
	5310	8	62.3	5	1138.5	2	
	5310	9	52.0	9	1697.5	2	
	5310	10	74.9	12	1747.1	1	
	5310	11	77.6	5	1837.8	2	
	5310	12	65.9	20	1392.6	2	
	5310	13	99.8	19	1368.6	2	
	5310	14	74.9	9	1587.0	1	
	5310	15	61.9	6	1599.4	1	
	5310	16	52.3	19	1390.3	3	
	5310	17	53.1	17	1544.0	1	
	5310	18	79.0	9	1177.4	3	
	5310	19	84.1	16	1386.4	3	
	5310	20	90.5	19	1285.7	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	51.7	17	1590.9	2	1
	5310	2	75.5	10	1685.3	3	
	5310	3	69.9	11	1181.0	1	
	5310	4	95.3	15	1671.1	2	
	5310	5	94.1	13	1439.9	3	
	5310	6	94.4	10	1314.8	2	
	5310	7	56.5	16	1061.8	1	
	5310	8	63.4	18	1482.4	3	
	5310	9	62.3	14	1110.0	1	
	5310	10	99.8	12	1409.1	3	
14	5310	1	65.0	8	1438.6	3	1
	5310	2	86.3	12	1162.6	2	
	5310	3	76.8	11	1056.9	2	
	5310	4	73.4	9	1635.0	1	
	5310	5	89.6	17	1202.7	2	
	5310	6	72.1	19	1365.1	1	
	5310	7	59.9	6	1190.5	2	
	5310	8	71.2	13	1134.3	1	
	5310	9	94.3	20	1277.3	2	
	5310	10	80.3	12	1914.0	2	
	5310	11	82.1	19	1594.1	3	
	5310	12	72.4	9	1746.8	2	
	5310	13	80.4	10	1090.1	2	
	5310	14	92.4	17	1434.0	2	
	5310	15	99.5	7	1980.4	1	
	5310	16	67.3	20	1981.1	2	
	5310	17	59.7	15	1651.8	2	
	5310	18	88.6	18	1692.0	2	
	5310	19	64.0	12	1671.3	1	
	5310	20	96.1	17	1523.2	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	78.6	6	1682.9	3	1
	5310	2	85.0	9	1768.1	2	
	5310	3	62.3	13	1607.5	1	
	5310	4	75.5	18	1731.0	2	
	5310	5	55.3	9	1955.2	1	
	5310	6	79.4	12	1231.8	3	
	5310	7	65.3	16	1177.9	2	
	5310	8	58.0	18	1040.6	1	
	5310	9	82.6	19	1059.3	1	
	5310	10	59.4	16	1290.0	3	
	5310	11	56.7	9	1088.2	3	
	5310	12	93.7	18	1470.1	1	
	5310	13	92.1	5	1130.5	2	
	5310	14	56.2	7	1049.8	2	
	5310	15	86.8	10	1832.2	2	
	5310	16	91.8	20	1809.8	1	
	5310	17	91.7	10	1436.7	1	
	5310	18	99.9	17	1319.9	3	
	5310	19	94.3	14	1398.3	1	
16	5310	1	69.2	8	1950.5	1	1
	5310	2	66.6	15	1109.9	1	
	5310	3	81.6	18	1307.9	2	
	5310	4	74.1	7	1559.2	3	
	5310	5	51.2	7	1423.4	2	
	5310	6	72.1	6	1678.8	1	
	5310	7	96.6	12	1305.6	1	
	5310	8	66.2	12	1192.4	2	
	5310	9	61.7	13	1932.0	2	
	5310	10	96.3	8	1101.4	3	
	5310	11	52.0	6	1454.2	2	
	5310	12	89.8	10	1319.4	2	
	5310	13	79.2	15	1735.4	1	
	5310	14	86.7	18	1763.5	1	
	5310	15	70.9	14	1788.1	1	
	5310	16	71.8	17	1351.0	3	
	5310	17	97.5	15	1802.1	2	
	5310	18	67.1	9	1620.8	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	62.2	13	1709.8	2	1
	5310	2	86.4	11	1238.5	3	
	5310	3	73.7	8	1412.4	1	
	5310	4	79.3	9	1536.5	2	
	5310	5	63.1	19	1006.4	3	
	5310	6	83.7	14	1371.2	1	
	5310	7	84.0	6	1543.9	3	
	5310	8	97.4	8	1244.8	3	
	5310	9	96.3	13	1410.1	3	
	5310	10	65.1	8	1733.1	3	
	5310	11	66.3	6	1860.7	2	
	5310	12	57.8	18	1785.1	2	
	5310	13	90.3	14	1511.0	3	
	5310	14	98.9	10	1592.2	1	
	5310	15	59.4	6	1762.0	2	
	5310	16	74.6	17	1515.1	2	
	5310	17	85.8	18	1038.5	2	
18	5310	1	97.7	18	1601.9	2	1
	5310	2	96.8	6	1710.0	2	
	5310	3	76.9	19	1052.6	3	
	5310	4	78.4	9	1336.3	2	
	5310	5	95.1	7	1669.9	1	
	5310	6	94.1	8	1373.2	1	
	5310	7	97.2	7	1211.1	3	
	5310	8	94.3	13	1975.5	1	
	5310	9	62.6	8	1905.5	2	
	5310	10	70.0	13	1743.6	1	
	5310	11	60.7	15	1756.8	2	
	5310	12	69.5	16	1910.3	3	
	5310	13	59.2	11	1895.5	1	
	5310	14	74.1	7	1199.2	2	
	5310	15	59.0	16	1629.3	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	56.6	9	1057.5	3	1
	5310	2	92.5	9	1276.0	1	
	5310	3	76.2	12	1119.7	3	
	5310	4	68.3	7	1496.2	1	
	5310	5	80.9	13	1266.3	3	
	5310	6	93.9	6	1887.6	2	
	5310	7	82.2	13	1074.0	3	
	5310	8	50.0	7	1238.8	2	
	5310	9	51.0	16	1208.2	2	
	5310	10	51.9	13	1532.3	3	
	5310	11	98.1	17	1917.5	3	
	5310	12	60.3	11	1764.2	1	
	5310	13	73.9	14	1764.6	1	
	5310	14	92.1	18	1436.3	3	
20	5310	1	92.9	7	1039.5	3	1
	5310	2	50.8	11	1220.5	3	
	5310	3	63.0	6	1372.7	3	
	5310	4	60.4	7	1529.5	3	
	5310	5	97.6	12	1484.6	3	
	5310	6	75.8	20	1280.2	2	
	5310	7	82.0	10	1477.4	3	
	5310	8	77.6	12	1179.7	2	
	5310	9	99.3	10	1662.0	2	
	5310	10	64.0	9	1195.2	3	
21	5323.5	1	90.1	13	1654.0	1	1
	5320.5	2	62.1	20	1719.4	3	
	5320.5	3	89.6	20	1258.7	2	
	5322.5	4	69.5	16	1793.9	3	
	5324.5	5	71.2	11	1837.4	3	
	5321.5	6	90.6	17	1223.6	1	
	5325.5	7	50.8	8	1514.6	3	
	5325.5	8	51.6	8	1854.1	2	
	5323.5	9	97.8	13	1111.4	2	
	5322.5	10	90.5	14	1373.6	3	
	5322.5	11	74.0	14	1890.8	3	
	5323.5	12	69.0	12	1038.9	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324.5	1	64.9	10	1810.9	1	1
	5323.5	2	96.1	12	1918.2	1	
	5323.5	3	64.8	12	1244.3	1	
	5322.5	4	95.8	16	1840.8	1	
	5322.5	5	89.7	14	1629.1	1	
	5323.5	6	54.1	13	1959.7	3	
	5326.5	7	68.4	5	1321.3	3	
	5322.5	8	69.3	16	1884.1	3	
	5325.5	9	74.9	7	1391.2	2	
23	5322.5	1	87.5	16	1523.0	2	1
	5320.5	2	86.5	20	1322.3	3	
	5324.5	3	87.2	10	1514.8	1	
	5325.5	4	54.2	8	1665.7	3	
	5323.5	5	90.0	13	1031.5	1	
	5321.5	6	81.5	18	1055.6	1	
	5323.5	7	55.2	12	1217.3	2	
	5324.5	8	55.0	11	1949.4	1	
	5322.5	9	65.4	16	1774.3	3	
	5322.5	10	79.2	15	1601.1	1	
	5321.5	11	81.3	18	1146.7	3	
	5325.5	12	67.3	7	1208.1	2	
	5325.5	13	65.2	8	1541.2	1	
	5320.5	14	87.5	19	1889.1	3	
	5324.5	15	99.4	10	1583.3	3	
24	5324.5	1	67.8	9	1059.0	2	1
	5323.5	2	60.5	13	1362.3	2	
	5322.5	3	82.0	15	1560.9	1	
	5325.5	4	81.5	8	1487.9	1	
	5321.5	5	55.9	18	1835.1	2	
	5322.5	6	87.5	14	1465.9	1	
	5322.5	7	74.4	15	1559.8	2	
	5320.5	8	83.2	20	1918.1	1	
	5322.5	9	73.4	16	1439.1	3	
	5321.5	10	58.8	17	1857.9	2	
	5322.5	11	85.7	16	1014.6	3	
	5326.5	12	61.2	5	1404.9	3	
	5321.5	13	73.7	17	1148.2	3	
	5324.5	14	99.5	9	1649.3	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5320.5	1	86.7	20	1596.3	2	1
	5325.5	2	65.9	8	1413.1	3	
	5323.5	3	86.3	12	1802.9	1	
	5326.5	4	82.4	6	1735.7	2	
	5324.5	5	59.0	11	1608.9	2	
	5324.5	6	60.6	9	1195.6	2	
	5325.5	7	96.7	7	1671.8	3	
	5321.5	8	77.5	18	1487.8	2	
	5324.5	9	93.3	9	1161.9	2	
	5321.5	10	83.9	17	1351.2	1	
	5326.5	11	64.6	6	1612.7	1	
	5322.5	12	54.7	15	1601.1	3	
	5324.5	13	65.5	9	1342.2	2	
	5324.5	14	94.7	9	1749.3	3	
	5320.5	15	78.0	20	1044.8	3	
	5324.5	16	67.1	11	1897.6	1	
	5321.5	17	90.3	17	1998.5	1	
	5325.5	18	85.8	8	1737.6	3	
26	5323.5	1	77.6	12	1422.1	2	0
	5324.5	2	83.9	9	1492.1	1	
	5326.5	3	86.2	6	1989.1	1	
	5321.5	4	82.3	17	1101.4	2	
	5326.5	5	81.0	5	1740.9	2	
	5321.5	6	72.2	17	1406.8	3	
	5320.5	7	69.2	20	1035.7	2	
	5321.5	8	58.8	17	1630.9	1	
	5326.5	9	63.8	5	1485.4	3	
	5320.5	10	84.7	19	1208.0	3	
	5320.5	11	88.3	19	1920.5	3	
	5320.5	12	82.4	20	1208.2	3	
	5326.5	13	85.1	5	1004.1	2	
	5321.5	14	90.5	17	1693.0	3	
	5324.5	15	98.8	11	1400.5	2	
	5324.5	16	62.5	9	1585.1	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5322.5	1	55.3	15	1724.7	2	1
	5324.5	2	82.3	9	1792.7	1	
	5322.5	3	55.5	14	1781.6	1	
	5320.5	4	84.1	19	1558.3	2	
	5321.5	5	72.5	18	1503.2	1	
	5320.5	6	94.0	20	1174.6	1	
	5323.5	7	58.1	13	1714.9	1	
	5321.5	8	86.3	17	1788.1	3	
	5326.5	9	51.8	6	1089.8	3	
	5322.5	10	96.9	16	1129.2	1	
	5324.5	11	82.6	11	1482.0	2	
	5323.5	12	84.7	12	1534.3	3	
	5324.5	13	59.8	9	1106.1	3	
	5323.5	14	83.4	13	1280.9	2	
	5326.5	15	97.0	6	1841.3	1	
	5323.5	16	53.3	12	1923.4	1	
	5323.5	17	81.4	12	1002.4	3	
	5321.5	18	80.3	18	1393.8	1	
	5325.5	19	81.7	8	1180.9	3	
	5325.5	20	81.1	7	1873.4	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5326.5	1	97.5	6	1494.8	1	1
	5325.5	2	59.0	7	1502.7	1	
	5326.5	3	76.7	6	1645.7	3	
	5323.5	4	66.8	13	1196.2	1	
	5326.5	5	86.9	5	1741.4	1	
	5322.5	6	80.2	15	1365.3	3	
	5323.5	7	52.3	12	1830.7	1	
	5322.5	8	55.5	15	1189.6	2	
	5321.5	9	95.5	17	1186.9	3	
	5324.5	10	75.7	11	1592.8	3	
	5322.5	11	97.4	16	1658.0	1	
	5320.5	12	56.3	19	1482.5	3	
	5325.5	13	89.9	7	1565.1	2	
	5321.5	14	80.3	17	1887.6	3	
	5320.5	15	61.1	19	1328.8	2	
	5321.5	16	70.7	18	1056.6	2	
	5326.5	17	99.7	5	1750.7	3	
	5325.5	18	89.6	7	1235.7	3	
	5326.5	19	92.9	6	1421.8	3	
	5323.5	20	68.7	12	1725.7	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5323.5	1	70.1	12	1063.4	2	1
	5322.5	2	81.5	14	1059.6	1	
	5324.5	3	62.3	9	1535.7	3	
	5325.5	4	81.1	8	1614.4	3	
	5323.5	5	88.7	12	1971.8	2	
	5325.5	6	67.6	8	1686.9	1	
	5324.5	7	73.3	10	1513.3	1	
	5322.5	8	70.0	16	1235.8	2	
	5326.5	9	86.0	5	1070.2	2	
	5324.5	10	97.5	9	1059.4	3	
	5323.5	11	52.5	13	1036.2	1	
	5322.5	12	87.7	15	1413.9	1	
	5322.5	13	63.9	15	1590.7	2	
	5326.5	14	76.4	6	1223.9	3	
	5323.5	15	58.4	13	1202.5	3	
	5326.5	16	89.3	6	1589.7	1	
	5324.5	17	50.8	10	1218.7	2	
30	5323.5	1	80.7	12	1104.0	1	1
	5322.5	2	52.8	16	1504.2	3	
	5325.5	3	52.5	7	1161.7	3	
	5323.5	4	75.9	13	1571.2	2	
	5322.5	5	74.7	14	1594.5	3	
	5323.5	6	99.3	12	1296.6	2	
	5324.5	7	92.0	11	1527.4	1	
	5322.5	8	98.2	14	1869.5	1	
	5323.5	9	83.8	13	1588.3	1	
	5324.5	10	55.4	9	1644.6	2	
	5323.5	11	76.0	12	1287.7	1	
	5325.5	12	93.8	7	1793.0	1	
	5320.5	13	64.0	19	1343.7	1	
	5322.5	14	65.2	16	1635.1	2	
Detection Percentage (%)							93.33

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	578	92	1730	1
2	5290	1	698	76	1433	1
3	5290	1	718	74	1393	1
4	5290	1	678	78	1475	1
5	5290	1	858	62	1166	1
6	5290	1	658	81	1520	1
7	5290	1	938	57	1066	1
8	5290	1	878	61	1139	1
9	5290	1	798	67	1253	1
10	5290	1	3066	18	326	1
11	5290	1	798	67	1253	1
12	5290	1	638	83	1567	1
13	5290	1	518	102	1931	1
14	5290	1	738	72	1355	1
15	5290	1	858	62	1166	1
16	5290	1	1261	42	793	1
17	5290	1	1478	36	677	1
18	5290	1	1696	32	590	1
19	5290	1	3019	18	331	1
20	5290	1	2005	27	499	1
21	5290	1	2628	21	381	1
22	5290	1	1328	40	753	1
23	5290	1	1294	41	773	1
24	5290	1	1138	47	879	1
25	5290	1	2374	23	421	1
26	5290	1	1475	36	678	1
27	5290	1	692	77	1445	1
28	5290	1	2118	25	472	1
29	5290	1	1748	31	572	1
30	5290	1	3063	18	326	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	4.30	153.80	26	6502	1
2	5290	2.10	216.00	29	4630	1
3	5290	1.60	158.60	23	6305	1
4	5290	3.40	215.30	28	4645	1
5	5290	2.60	198.00	26	5051	1
6	5290	4.30	187.40	25	5336	1
7	5290	2.50	159.10	26	6285	1
8	5290	2.50	164.90	25	6064	1
9	5290	2.00	224.50	24	4454	1
10	5290	1.60	152.40	29	6562	1
11	5290	4.30	187.40	26	5336	1
12	5290	2.10	170.50	27	5865	1
13	5290	1.40	168.70	28	5928	1
14	5290	2.70	226.10	28	4423	1
15	5290	3.40	170.90	23	5851	1
16	5290	3.80	187.10	24	5345	1
17	5290	2.40	157.60	27	6345	1
18	5290	3.10	174.90	26	5718	1
19	5290	4.70	157.60	23	6345	1
20	5290	1.60	169.80	23	5889	0
21	5290	3.00	191.90	24	5211	1
22	5290	3.90	173.60	29	5760	1
23	5290	3.10	218.70	29	4572	1
24	5290	3.10	177.60	23	5631	1
25	5290	2.90	201.50	23	4963	1
26	5290	3.20	207.90	23	4810	1
27	5290	2.20	201.80	29	4955	1
28	5290	4.00	180.90	23	5528	1
29	5290	3.90	167.70	25	5963	1
30	5290	1.10	181.40	23	5513	0
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	8.10	264.50	16	3780.72	1
2	5290	9.90	489.60	18	2042.48	1
3	5290	8.30	293.90	16	3402.52	0
4	5290	8.10	465.90	16	2146.38	1
5	5290	9.10	278.80	17	3586.80	1
6	5290	8.50	292.30	16	3421.14	1
7	5290	7.40	371.40	16	2692.51	1
8	5290	6.10	401.50	17	2490.66	0
9	5290	7.90	225.70	16	4430.66	1
10	5290	7.20	289.00	17	3460.21	1
11	5290	8.20	292.10	17	3423.49	1
12	5290	7.50	445.20	17	2246.18	1
13	5290	7.50	478.30	18	2090.74	1
14	5290	6.60	435.90	16	2294.10	1
15	5290	7.20	350.40	16	2853.88	1
16	5290	7.20	264.10	16	3786.44	1
17	5290	8.40	468.20	18	2135.84	1
18	5290	8.00	268.00	17	3731.34	0
19	5290	9.10	411.90	18	2427.77	1
20	5290	6.70	214.20	17	4668.53	1
21	5290	7.40	380.90	16	2625.36	1
22	5290	8.90	436.40	18	2291.48	1
23	5290	6.20	428.90	17	2331.55	0
24	5290	7.80	434.00	16	2304.15	1
25	5290	7.80	282.50	16	3539.82	1
26	5290	6.70	316.80	18	3156.57	1
27	5290	7.50	314.30	18	3181.67	1
28	5290	6.10	390.50	18	2560.82	1
29	5290	8.50	273.80	17	3652.30	0
30	5290	7.90	416.10	18	2403.27	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	14.80	423.00	13	2364	1
2	5290	19.20	201.80	14	4955	1
3	5290	17.90	356.50	15	2805	1
4	5290	16.90	262.50	13	3810	1
5	5290	19.90	325.30	13	3074	1
6	5290	15.80	363.60	16	2750	1
7	5290	15.40	457.50	13	2186	0
8	5290	11.60	325.30	14	3074	1
9	5290	12.30	325.60	15	3071	1
10	5290	18.00	284.80	15	3511	1
11	5290	12.60	303.00	16	3300	0
12	5290	14.40	469.10	13	2132	1
13	5290	13.50	462.30	12	2163	0
14	5290	12.10	498.10	16	2008	1
15	5290	13.00	324.90	12	3078	1
16	5290	11.30	309.50	16	3231	1
17	5290	18.60	228.90	14	4369	1
18	5290	17.70	248.40	13	4026	0
19	5290	17.40	485.50	16	2060	1
20	5290	19.00	481.50	16	2077	1
21	5290	16.60	427.20	16	2341	1
22	5290	17.20	364.20	12	2746	1
23	5290	13.90	472.90	13	2115	1
24	5290	15.10	402.30	16	2486	1
25	5290	16.70	323.30	13	3093	1
26	5290	11.70	342.70	15	2918	1
27	5290	14.50	208.60	16	4794	1
28	5290	16.20	222.50	12	4494	1
29	5290	13.90	292.40	16	3420	1
30	5290	13.10	435.80	15	2295	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5257.5	1	91.7	16	1162.0	3	1
	5253.5	2	82.2	5	1127.5	3	
	5254.5	3	85.0	7	1475.4	2	
	5256.5	4	97.4	13	1892.3	1	
	5259.5	5	64.0	19	1942.6	3	
	5257.5	6	78.4	15	1891.2	2	
	5258.5	7	57.7	17	1807.6	3	
	5255.5	8	60.0	11	1547.8	2	
	5258.5	9	85.6	17	1882.6	1	
	5258.5	10	89.8	17	1172.1	2	
	5256.5	11	84.8	13	1539.4	1	
2	5255.5	1	95.5	10	1607.9	1	1
	5257.5	2	63.9	15	1535.1	1	
	5253.5	3	76.8	6	1147.1	3	
	5255.5	4	86.1	10	1819.2	3	
	5256.5	5	66.9	12	1282.6	1	
	5258.5	6	65.1	17	1202.5	3	
	5255.5	7	77.6	10	1012.9	3	
	5257.5	8	94.7	14	1828.7	3	
	5258.5	9	97.9	18	1920.9	1	
	5254.5	10	57.4	8	1150.5	2	
	5255.5	11	75.0	9	1379.3	3	
	5255.5	12	63.4	9	1882.3	1	
3	5255.5	1	50.0	9	1058.3	3	1
	5259.5	2	84.3	19	1489.8	3	
	5253.5	3	54.1	6	1012.9	1	
	5257.5	4	76.4	15	1844.1	3	
	5255.5	5	72.9	10	1128.7	3	
	5254.5	6	86.2	7	1586.8	3	
	5255.5	7	86.3	10	1349.8	1	
	5254.5	8	81.0	8	1702.0	3	
	5256.5	9	66.5	13	1401.6	3	
	5256.5	10	86.1	12	1415.7	2	
	5257.5	11	70.5	16	1688.3	2	
	5259.5	12	99.4	19	1052.5	2	
	5256.5	13	82.2	13	1048.8	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5258.5	1	91.1	18	1092.9	3	1
	5255.5	2	68.0	11	1145.3	2	
	5255.5	3	69.1	9	1223.4	2	
	5258.5	4	99.0	18	1692.1	2	
	5257.5	5	51.7	14	1474.1	3	
	5255.5	6	62.7	11	1286.3	3	
	5258.5	7	90.5	18	1644.4	1	
	5254.5	8	66.9	7	1955.1	1	
	5257.5	9	67.2	14	1953.7	3	
5	5253.5	1	66.6	5	1107.5	3	1
	5259.5	2	73.5	20	1166.8	1	
	5256.5	3	81.1	12	1942.6	3	
	5257.5	4	95.0	15	1946.9	2	
	5255.5	5	82.9	10	1985.0	1	
	5255.5	6	64.4	11	1056.4	3	
	5255.5	7	69.3	10	1078.8	2	
	5254.5	8	67.5	7	1615.9	2	
	5254.5	9	68.0	7	1902.6	1	
	5256.5	10	56.8	12	1739.1	3	
	5257.5	11	69.9	15	1290.0	2	
	5253.5	12	86.2	6	1118.6	1	
	5258.5	13	91.2	18	1987.6	2	
	5254.5	14	69.8	8	1230.5	3	
	5255.5	15	72.1	11	1307.0	2	
6	5258.5	1	61.5	17	1205.4	1	1
	5258.5	2	54.3	17	1077.6	1	
	5258.5	3	96.9	18	1797.4	3	
	5256.5	4	59.0	13	1149.5	2	
	5259.5	5	91.7	20	1792.7	2	
	5255.5	6	50.3	10	1778.2	2	
	5257.5	7	71.7	15	1576.5	3	
	5257.5	8	94.4	15	1511.0	1	
	5257.5	9	82.9	16	1738.7	1	
	5258.5	10	69.1	18	1259.2	1	
	5254.5	11	100.0	8	1382.5	2	
	5253.5	12	52.0	6	1349.8	2	
	5255.5	13	60.4	11	1016.7	3	
	5255.5	14	85.3	11	1844.8	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5259.5	1	76.4	20	1508.2	3	1
	5257.5	2	57.8	15	1001.6	1	
	5254.5	3	79.2	8	1947.7	2	
	5258.5	4	61.3	17	1670.1	2	
	5258.5	5	99.8	18	1522.5	2	
	5253.5	6	78.7	5	1940.3	3	
	5257.5	7	85.3	16	1169.5	1	
	5254.5	8	81.5	7	1321.8	1	
	5255.5	9	71.8	11	1461.2	1	
	5258.5	10	88.6	18	1093.8	3	
	5253.5	11	59.6	5	1497.5	2	
	5256.5	12	74.9	13	1475.9	2	
	5256.5	13	54.2	13	1560.8	3	
	5255.5	14	60.4	9	1723.8	2	
	5257.5	15	98.9	16	1383.5	2	
	5255.5	16	69.0	11	1304.4	1	
	5257.5	17	96.0	15	1316.5	3	
8	5254.5	1	92.8	7	1919.6	2	1
	5256.5	2	69.6	13	1049.3	1	
	5253.5	3	53.1	6	1145.4	2	
	5257.5	4	73.2	16	1003.0	3	
	5253.5	5	66.5	6	1671.9	1	
	5254.5	6	83.1	8	1578.8	2	
	5256.5	7	88.6	13	1260.5	2	
	5255.5	8	82.8	9	1580.5	3	
	5257.5	9	94.0	16	1420.1	3	
	5257.5	10	55.7	15	1705.9	1	
	5253.5	11	55.2	6	1068.2	1	
	5253.5	12	86.8	5	1855.8	2	
	5255.5	13	80.3	9	1478.4	3	
	5253.5	14	64.6	6	1164.2	1	
	5258.5	15	79.5	18	1920.7	2	
	5259.5	16	85.0	19	1839.2	1	
	5254.5	17	63.8	7	1952.2	3	
	5255.5	18	94.9	11	1366.6	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5258.5	1	65.1	18	1443.2	1	1
	5257.5	2	61.9	14	1971.1	3	
	5258.5	3	79.3	17	1859.9	1	
	5255.5	4	97.0	9	1290.1	2	
	5256.5	5	90.8	13	1440.1	1	
	5253.5	6	71.3	6	1934.5	1	
	5258.5	7	63.9	17	1694.6	2	
	5253.5	8	73.6	5	1020.1	3	
	5259.5	9	92.7	20	1808.2	2	
	5259.5	10	84.3	19	1328.1	2	
	5256.5	11	68.3	12	1911.2	1	
	5254.5	12	62.8	8	1516.5	2	
	5259.5	13	88.7	19	1447.2	2	
	5256.5	14	95.4	12	1496.7	3	
	5256.5	15	85.5	12	1107.7	3	
	5257.5	16	62.9	14	1570.9	3	
	5254.5	17	88.0	8	1502.3	2	
	5256.5	18	94.7	12	1509.9	1	
	5258.5	19	72.3	18	1323.7	2	
10	5257.5	1	92.8	14	1900.2	3	1
	5257.5	2	86.4	15	1547.8	3	
	5256.5	3	70.8	12	1651.6	2	
	5258.5	4	95.6	18	1166.9	2	
	5254.5	5	63.6	8	1334.9	3	
	5255.5	6	76.6	9	1304.7	2	
	5255.5	7	56.6	10	1552.4	3	
	5258.5	8	54.1	17	1248.9	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	98.5	19	1333.4	1	1
	5290	2	50.6	8	1920.6	2	
	5290	3	68.3	17	1784.8	2	
	5290	4	89.7	15	1279.4	3	
	5290	5	57.2	17	1935.7	1	
	5290	6	63.4	16	1052.4	3	
	5290	7	75.4	12	1179.1	1	
	5290	8	93.7	10	1621.2	3	
	5290	9	90.3	8	1942.8	3	
	5290	10	72.5	20	1832.2	2	
	5290	11	92.7	13	1639.4	3	
	5290	12	62.7	19	1413.5	3	
	5290	13	86.9	13	1792.7	2	
	5290	14	78.5	9	1353.8	2	
	5290	15	81.4	12	1137.7	1	
	5290	16	95.2	13	1237.6	1	
12	5290	1	89.8	17	1815.3	1	1
	5290	2	62.0	5	1867.7	3	
	5290	3	63.3	18	1575.3	3	
	5290	4	58.8	15	1041.1	1	
	5290	5	60.1	8	1559.2	3	
	5290	6	71.9	12	1265.4	3	
	5290	7	90.2	11	1538.2	2	
	5290	8	80.7	19	1092.1	1	
	5290	9	52.3	10	1164.3	1	
	5290	10	86.2	18	1461.4	1	
	5290	11	69.3	5	1419.5	1	
	5290	12	52.0	13	1150.3	2	
	5290	13	92.6	7	1611.6	2	
	5290	14	86.9	8	1057.7	1	
	5290	15	69.1	6	1236.3	3	
	5290	16	97.6	7	1507.7	2	
	5290	17	98.2	17	1408.1	2	
	5290	18	67.6	9	1175.1	1	
	5290	19	53.5	16	1525.0	3	
	5290	20	95.3	15	1847.9	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	67.6	17	1895.1	2	1
	5290	2	58.2	14	1472.0	1	
	5290	3	97.7	17	1996.6	2	
	5290	4	81.6	19	1960.1	2	
	5290	5	89.7	15	1756.9	3	
	5290	6	79.7	15	1443.6	2	
	5290	7	98.9	13	1648.2	1	
	5290	8	64.9	6	1914.0	3	
	5290	9	58.9	16	1617.5	3	
	5290	10	97.3	9	1241.7	3	
14	5290	1	77.3	14	1809.8	1	1
	5290	2	52.6	15	1411.3	2	
	5290	3	60.5	13	1982.4	2	
	5290	4	71.3	9	1151.1	1	
	5290	5	75.6	6	1363.3	1	
	5290	6	61.2	6	1115.6	2	
	5290	7	66.8	8	1174.8	1	
	5290	8	95.9	7	1121.6	2	
	5290	9	76.6	7	1128.0	1	
	5290	10	95.2	14	1422.9	3	
	5290	11	82.6	18	1765.6	3	
	5290	12	78.9	20	1972.0	1	
	5290	13	79.1	8	1105.7	1	
	5290	14	62.0	19	1794.2	2	
	5290	15	95.0	16	1026.9	3	
	5290	16	90.2	12	1136.7	3	
	5290	17	91.6	12	1727.6	1	
	5290	18	84.3	20	1141.3	2	
	5290	19	50.9	11	1039.6	2	
	5290	20	73.4	15	1949.3	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	76.4	10	1235.2	1	1
	5290	2	93.7	15	1587.0	1	
	5290	3	64.2	12	1740.0	2	
	5290	4	64.8	15	1840.3	1	
	5290	5	73.6	17	1997.1	3	
	5290	6	74.7	18	1088.4	1	
	5290	7	94.8	17	1959.4	3	
	5290	8	98.4	9	1756.7	3	
	5290	9	91.0	19	1219.8	2	
	5290	10	55.8	16	1345.6	3	
	5290	11	92.8	18	1079.3	1	
	5290	12	59.6	18	1946.3	1	
	5290	13	75.5	19	1116.9	3	
	5290	14	71.8	19	1207.4	1	
	5290	15	97.2	8	1560.9	3	
	5290	16	97.9	18	1485.6	1	
	5290	17	65.7	10	1917.9	2	
	5290	18	52.7	20	1661.9	2	
	5290	19	92.9	5	1109.7	3	
16	5290	1	74.6	12	1204.6	2	1
	5290	2	64.7	11	1136.3	1	
	5290	3	71.8	8	1592.9	1	
	5290	4	83.4	17	1328.2	2	
	5290	5	54.4	5	1692.0	1	
	5290	6	64.2	13	1794.3	1	
	5290	7	74.0	15	1122.4	3	
	5290	8	61.1	13	1020.2	3	
	5290	9	59.6	16	1776.4	3	
	5290	10	93.4	13	1639.5	1	
	5290	11	55.7	8	1560.2	2	
	5290	12	83.8	10	1725.5	1	
	5290	13	75.5	8	1079.5	1	
	5290	14	68.3	9	1129.3	3	
	5290	15	98.8	8	1468.4	2	
	5290	16	61.8	6	1349.1	2	
	5290	17	85.1	18	1303.9	1	
	5290	18	79.3	8	1111.1	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	95.2	9	1684.1	1	1
	5290	2	73.4	6	1238.9	3	
	5290	3	50.9	16	1076.1	1	
	5290	4	83.4	11	1712.5	3	
	5290	5	63.6	6	1706.0	2	
	5290	6	67.0	8	1640.0	2	
	5290	7	88.7	10	1393.1	1	
	5290	8	91.0	16	1795.1	3	
	5290	9	66.5	6	1163.7	2	
	5290	10	61.8	6	1679.9	3	
	5290	11	71.7	16	1998.2	2	
	5290	12	91.8	17	1687.1	2	
	5290	13	94.4	9	1961.4	1	
	5290	14	53.7	16	1107.0	2	
	5290	15	88.8	9	1991.9	3	
	5290	16	96.5	10	1838.3	3	
	5290	17	78.2	12	1772.0	3	
18	5290	1	63.8	8	1703.7	1	1
	5290	2	50.7	9	1250.0	1	
	5290	3	84.1	16	1894.1	2	
	5290	4	57.9	6	1172.0	1	
	5290	5	73.0	6	1765.0	2	
	5290	6	83.5	12	1880.1	3	
	5290	7	78.6	7	1763.2	3	
	5290	8	88.0	10	1183.5	1	
	5290	9	85.6	6	1262.4	2	
	5290	10	94.3	17	1238.8	2	
	5290	11	78.1	10	1085.5	1	
	5290	12	90.8	16	1747.6	2	
	5290	13	52.3	6	1773.7	2	
	5290	14	92.3	17	1231.1	3	
	5290	15	92.4	5	1271.9	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	78.4	11	1292.4	3	1
	5290	2	70.6	16	1216.8	2	
	5290	3	54.5	19	1941.1	1	
	5290	4	81.7	6	1246.6	3	
	5290	5	57.0	14	1263.4	2	
	5290	6	55.3	13	1458.7	2	
	5290	7	58.6	10	1075.0	2	
	5290	8	82.3	18	1977.2	3	
	5290	9	89.8	6	1128.5	1	
	5290	10	87.9	20	1111.1	2	
	5290	11	96.1	7	1082.8	2	
	5290	12	51.4	12	1741.9	1	
	5290	13	54.4	12	1828.3	2	
	5290	14	70.6	13	1104.8	2	
20	5290	1	84.7	14	1474.5	2	0
	5290	2	86.0	11	1326.8	2	
	5290	3	73.5	10	1789.4	2	
	5290	4	80.0	19	1003.8	1	
	5290	5	92.5	16	1774.6	1	
	5290	6	61.3	16	1450.0	1	
	5290	7	56.3	11	1543.8	3	
	5290	8	86.5	15	1545.0	3	
	5290	9	71.3	17	1406.9	3	
	5290	10	90.1	8	1210.5	3	
21	5325.5	1	94.6	7	1780.1	1	1
	5326.5	2	74.9	6	1428.3	2	
	5321.5	3	72.3	18	1906.8	1	
	5324.5	4	52.0	9	1967.6	3	
	5325.5	5	64.4	7	1176.9	1	
	5320.5	6	71.5	19	1619.6	2	
	5322.5	7	96.2	15	1004.0	3	
	5320.5	8	89.4	19	1702.4	1	
	5320.5	9	97.0	19	1897.1	1	
	5326.5	10	73.5	6	1962.7	2	
	5320.5	11	80.2	19	1896.6	3	
	5321.5	12	74.1	18	1560.8	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5322.5	1	93.4	14	1231.1	3	1
	5324.5	2	54.9	9	1795.3	2	
	5326.5	3	85.5	6	1906.5	2	
	5320.5	4	66.4	19	1456.9	3	
	5320.5	5	64.9	19	1854.5	2	
	5321.5	6	93.9	18	1891.1	3	
	5323.5	7	70.8	13	1635.6	1	
	5321.5	8	65.7	17	1705.2	2	
	5324.5	9	98.5	9	1819.6	3	
23	5321.5	1	99.0	18	1391.4	2	1
	5320.5	2	50.8	20	1091.9	2	
	5322.5	3	95.8	14	1056.4	2	
	5322.5	4	74.6	15	1534.9	2	
	5320.5	5	70.6	19	1166.2	1	
	5325.5	6	71.0	7	1125.1	2	
	5321.5	7	82.4	17	1792.0	1	
	5322.5	8	66.5	14	1345.2	2	
	5321.5	9	98.6	17	1436.3	1	
	5326.5	10	61.9	6	1425.5	3	
	5324.5	11	73.2	10	1349.8	1	
	5324.5	12	62.8	11	1517.7	2	
	5323.5	13	50.5	12	1921.3	3	
	5326.5	14	57.5	6	1541.1	3	
	5322.5	15	65.6	15	1657.1	3	
24	5322.5	1	60.9	16	1244.7	1	1
	5322.5	2	97.2	15	1830.0	3	
	5322.5	3	58.7	15	1331.8	3	
	5326.5	4	70.5	6	1903.7	3	
	5324.5	5	98.9	11	1083.1	1	
	5325.5	6	64.3	7	1531.0	2	
	5321.5	7	64.8	18	1249.6	3	
	5322.5	8	95.3	15	1653.3	3	
	5321.5	9	89.6	17	1778.7	3	
	5325.5	10	74.4	7	1512.4	1	
	5324.5	11	52.6	11	1088.4	3	
	5323.5	12	65.7	13	1261.1	3	
	5324.5	13	71.7	11	1524.5	2	
	5325.5	14	59.2	7	1852.4	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5326.5	1	68.3	6	1283.9	1	1
	5320.5	2	52.1	19	1228.0	2	
	5324.5	3	62.9	11	1327.0	1	
	5324.5	4	71.1	10	1381.2	1	
	5321.5	5	93.9	18	1372.6	3	
	5326.5	6	99.4	6	1838.8	2	
	5323.5	7	60.0	13	1005.6	2	
	5324.5	8	59.7	10	1410.0	2	
	5325.5	9	65.8	8	1387.3	2	
	5325.5	10	56.1	7	1021.5	1	
	5322.5	11	95.2	14	1516.8	1	
	5322.5	12	68.6	14	1479.5	1	
	5325.5	13	78.9	7	1441.4	2	
	5326.5	14	56.3	5	1647.2	2	
	5322.5	15	55.5	16	1308.3	1	
	5320.5	16	53.7	19	1245.9	3	
	5320.5	17	61.3	20	1759.2	1	
	5322.5	18	93.6	14	1520.8	1	
26	5322.5	1	96.2	16	1175.2	3	0
	5324.5	2	96.0	9	1260.0	3	
	5320.5	3	90.0	20	1194.2	1	
	5323.5	4	78.3	12	1417.4	2	
	5321.5	5	77.4	17	1143.7	3	
	5320.5	6	67.1	19	1700.3	3	
	5324.5	7	71.2	11	1241.2	1	
	5326.5	8	55.8	6	1106.6	2	
	5322.5	9	77.2	15	1769.8	2	
	5321.5	10	51.1	17	1771.0	2	
	5324.5	11	75.5	9	1447.3	3	
	5322.5	12	58.6	16	1537.1	1	
	5324.5	13	91.4	10	1638.4	2	
	5322.5	14	70.0	16	1361.3	3	
	5323.5	15	74.6	13	1807.4	1	
	5322.5	16	53.8	14	1841.0	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5322.5	1	70.4	15	1041.2	3	1
	5323.5	2	83.0	13	1404.9	1	
	5324.5	3	60.2	9	1693.0	1	
	5321.5	4	67.1	18	1544.5	2	
	5325.5	5	85.6	8	1043.6	2	
	5326.5	6	73.9	6	1647.5	3	
	5322.5	7	63.5	14	1329.8	1	
	5326.5	8	51.7	5	1219.5	3	
	5320.5	9	83.0	19	1169.6	3	
	5324.5	10	81.5	10	1067.3	2	
	5321.5	11	93.5	18	1110.5	3	
	5322.5	12	80.8	15	1842.7	1	
	5324.5	13	51.0	10	1327.8	3	
	5324.5	14	96.8	10	1007.3	2	
	5324.5	15	50.4	10	1046.3	1	
	5322.5	16	97.6	14	1353.4	1	
	5320.5	17	58.9	19	1713.2	2	
	5323.5	18	84.7	13	1799.2	3	
	5320.5	19	87.8	19	1898.4	1	
	5326.5	20	86.8	6	1955.1	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5326.5	1	74.6	5	1505.3	3	1
	5324.5	2	73.4	10	1379.1	2	
	5321.5	3	66.2	17	1023.1	2	
	5324.5	4	99.2	10	1391.9	1	
	5326.5	5	95.9	5	1240.7	3	
	5323.5	6	94.4	12	1801.3	3	
	5321.5	7	52.7	18	1272.6	2	
	5322.5	8	85.1	16	1898.5	1	
	5324.5	9	76.8	10	1782.8	1	
	5324.5	10	92.9	10	1742.9	1	
	5326.5	11	85.4	6	1309.9	1	
	5324.5	12	52.3	9	1453.2	3	
	5325.5	13	77.1	7	1466.3	1	
	5323.5	14	63.4	13	1963.4	1	
	5324.5	15	81.9	9	1990.4	1	
	5324.5	16	80.8	10	1119.7	1	
	5322.5	17	71.7	15	1843.3	1	
	5324.5	18	60.0	9	1843.7	1	
	5323.5	19	83.9	12	1208.9	1	
	5320.5	20	54.8	19	1884.6	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5324.5	1	78.6	11	1674.1	3	1
	5320.5	2	56.0	19	1296.3	3	
	5321.5	3	80.8	18	1091.6	3	
	5321.5	4	73.8	17	1673.9	3	
	5324.5	5	88.8	11	1849.7	2	
	5325.5	6	55.3	7	1339.7	1	
	5320.5	7	100.0	19	1589.1	1	
	5323.5	8	73.4	13	1254.2	1	
	5320.5	9	73.9	19	1689.7	3	
	5325.5	10	57.2	8	1501.4	1	
	5322.5	11	60.0	14	1050.7	2	
	5321.5	12	97.0	18	1468.6	3	
	5321.5	13	50.4	17	1711.9	1	
	5321.5	14	56.4	17	1695.4	3	
	5321.5	15	59.7	17	1726.7	3	
	5325.5	16	97.9	7	1120.9	1	
	5321.5	17	79.2	18	1851.5	2	
30	5322.5	1	73.7	14	1106.8	1	1
	5326.5	2	78.4	6	1170.1	2	
	5321.5	3	95.9	18	1129.3	1	
	5320.5	4	57.2	20	1159.6	1	
	5322.5	5	83.2	16	1143.9	3	
	5323.5	6	57.9	12	1894.6	3	
	5320.5	7	64.1	19	1666.8	2	
	5326.5	8	80.6	6	1990.6	1	
	5325.5	9	65.6	8	1823.8	3	
	5325.5	10	52.1	7	1465.2	1	
	5320.5	11	54.7	20	1179.1	2	
	5323.5	12	56.6	13	1546.7	3	
	5322.5	13	84.9	15	1273.4	2	
	5322.5	14	57.9	14	1040.2	1	
Detection Percentage (%)							93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	578	92	1730	1
2	5290	1	718	74	1393	1
3	5290	1	698	76	1433	1
4	5290	1	898	59	1114	1
5	5290	1	878	61	1139	1
6	5290	1	3066	18	326	1
7	5290	1	898	59	1114	1
8	5290	1	918	58	1089	1
9	5290	1	678	78	1475	1
10	5290	1	558	95	1792	1
11	5290	1	898	59	1114	1
12	5290	1	598	89	1672	1
13	5290	1	918	58	1089	1
14	5290	1	3066	18	326	1
15	5290	1	598	89	1672	1
16	5290	1	2422	22	413	0
17	5290	1	2148	25	466	1
18	5290	1	581	91	1721	1
19	5290	1	2196	25	455	1
20	5290	1	1723	31	580	1
21	5290	1	2698	20	371	1
22	5290	1	2124	25	471	1
23	5290	1	646	82	1548	0
24	5290	1	3015	18	332	1
25	5290	1	1246	43	803	1
26	5290	1	548	97	1825	1
27	5290	1	1319	41	758	1
28	5290	1	3046	18	328	1
29	5290	1	3029	18	330	1
30	5290	1	2844	19	352	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	2.00	151.30	23	6609	1
2	5290	2.30	178.10	24	5615	1
3	5290	1.30	176.90	27	5653	1
4	5290	3.90	221.80	24	4509	1
5	5290	4.40	194.10	28	5152	1
6	5290	4.10	164.50	28	6079	1
7	5290	4.20	183.00	24	5464	1
8	5290	3.90	218.80	25	4570	1
9	5290	3.10	214.40	23	4664	1
10	5290	4.40	199.20	27	5020	1
11	5290	4.70	223.70	26	4470	1
12	5290	1.40	161.00	24	6211	0
13	5290	2.90	226.30	23	4419	1
14	5290	2.50	182.40	29	5482	1
15	5290	2.60	204.40	27	4892	1
16	5290	2.20	177.10	28	5647	1
17	5290	3.20	161.70	26	6184	1
18	5290	4.30	154.60	23	6468	1
19	5290	4.30	164.30	24	6086	1
20	5290	1.70	196.30	28	5094	1
21	5290	4.70	168.50	25	5935	1
22	5290	3.20	157.40	29	6353	1
23	5290	1.90	227.20	23	4401	1
24	5290	4.30	227.70	26	4392	1
25	5290	1.80	169.70	23	5893	0
26	5290	4.60	152.30	25	6566	1
27	5290	3.70	184.00	27	5435	1
28	5290	1.50	204.00	29	4902	1
29	5290	1.50	156.80	26	6378	1
30	5290	1.90	155.60	23	6427	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	8.80	331.10	17	3020.24	1
2	5290	8.30	456.60	18	2190.10	1
3	5290	9.90	495.50	16	2018.16	1
4	5290	8.90	380.00	16	2631.58	1
5	5290	9.60	282.80	16	3536.07	1
6	5290	7.60	350.40	18	2853.88	1
7	5290	8.90	233.60	18	4280.82	1
8	5290	6.40	319.70	17	3127.93	1
9	5290	9.40	295.50	17	3384.09	1
10	5290	8.90	377.50	18	2649.01	1
11	5290	8.80	230.70	17	4334.63	0
12	5290	7.10	351.80	17	2842.52	0
13	5290	6.20	480.10	18	2082.90	1
14	5290	8.00	297.90	18	3356.83	1
15	5290	7.10	348.80	16	2866.97	1
16	5290	9.00	374.00	16	2673.80	1
17	5290	8.40	227.90	17	4387.89	1
18	5290	9.90	240.40	18	4159.73	1
19	5290	6.50	347.50	17	2877.70	1
20	5290	6.20	394.80	16	2532.93	1
21	5290	6.50	354.90	16	2817.70	1
22	5290	8.70	300.20	17	3331.11	1
23	5290	8.10	493.50	16	2026.34	1
24	5290	7.30	283.40	16	3528.58	0
25	5290	6.10	240.70	18	4154.55	1
26	5290	8.10	475.80	18	2101.72	0
27	5290	9.90	349.90	16	2857.96	1
28	5290	7.40	409.80	17	2440.21	1
29	5290	9.50	258.00	17	3875.97	0
30	5290	6.90	439.90	17	2273.24	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	18.50	213.90	16	4675	1
2	5290	19.90	371.30	15	2693	1
3	5290	13.60	227.60	14	4394	1
4	5290	19.70	224.10	15	4462	1
5	5290	17.80	239.10	15	4182	1
6	5290	13.30	343.80	13	2909	1
7	5290	15.40	274.70	13	3640	0
8	5290	13.40	359.20	12	2784	1
9	5290	16.10	259.10	13	3860	1
10	5290	15.50	273.90	12	3651	0
11	5290	14.40	359.20	12	2784	1
12	5290	18.70	470.20	15	2127	1
13	5290	13.50	431.50	13	2317	0
14	5290	18.00	211.90	14	4719	1
15	5290	19.50	377.00	16	2653	0
16	5290	19.50	238.30	12	4196	1
17	5290	16.50	370.80	12	2697	1
18	5290	13.70	429.80	14	2327	0
19	5290	12.00	471.70	15	2120	1
20	5290	12.50	319.30	15	3132	1
21	5290	16.30	317.50	13	3150	0
22	5290	12.40	263.80	13	3791	1
23	5290	19.10	300.10	13	3332	1
24	5290	18.50	339.80	12	2943	0
25	5290	19.90	327.50	13	3053	1
26	5290	13.80	471.80	14	2120	1
27	5290	13.20	426.30	14	2346	1
28	5290	16.50	452.60	16	2209	1
29	5290	17.70	418.20	12	2391	1
30	5290	11.50	221.80	14	4509	1
Detection Percentage (%)						76.67

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5255	1	69.0	8	1166.4	3	1
	5258	2	78.9	14	1599.3	2	
	5259	3	60.0	18	1033.9	1	
	5260	4	90.1	19	1916.5	2	
	5259	5	70.6	17	1236.7	1	
	5256	6	74.6	10	1366.2	3	
	5258	7	66.3	16	1517.7	2	
	5258	8	77.0	14	1535.0	3	
	5254	9	78.7	6	1993.7	3	
	5254	10	55.6	6	1858.1	2	
	5254	11	96.6	6	1805.4	2	
2	5257	1	53.7	12	1429.5	2	1
	5258	2	80.4	16	1206.0	1	
	5258	3	66.8	16	1735.3	1	
	5258	4	98.8	16	1539.9	2	
	5256	5	59.5	9	1673.1	2	
	5257	6	62.2	13	1846.0	3	
	5259	7	84.5	17	1287.3	3	
	5256	8	91.7	11	1502.4	2	
	5260	9	79.4	20	1013.0	2	
	5257	10	50.7	12	1782.6	1	
	5256	11	54.2	10	1291.2	2	
	5256	12	88.4	9	1395.0	3	
3	5258	1	61.0	15	1158.3	3	1
	5259	2	72.6	18	1719.3	2	
	5259	3	73.8	17	1247.2	2	
	5255	4	69.6	8	1472.1	1	
	5255	5	95.9	7	1703.9	1	
	5256	6	51.7	10	1808.7	1	
	5256	7	81.5	11	1825.8	3	
	5254	8	70.9	6	1640.5	2	
	5258	9	91.3	14	1497.9	2	
	5260	10	91.9	19	1015.6	1	
	5255	11	58.1	7	1069.1	1	
	5255	12	82.2	8	1778.4	3	
	5260	13	99.8	19	1520.4	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5259	1	62.4	18	1402.2	2	1
	5259	2	57.5	18	1763.4	3	
	5257	3	83.0	13	1352.0	1	
	5258	4	79.6	14	1763.4	3	
	5256	5	76.2	10	1288.0	3	
	5256	6	65.3	11	1117.3	2	
	5254	7	54.1	6	1678.1	2	
	5257	8	82.2	13	1474.9	3	
	5255	9	80.9	8	1970.6	2	
5	5255	1	87.3	8	1451.6	1	1
	5255	2	63.5	7	1244.2	2	
	5259	3	78.0	18	1995.0	2	
	5254	4	58.2	6	1928.6	3	
	5255	5	79.1	8	1551.2	1	
	5260	6	89.0	20	1491.9	3	
	5259	7	91.7	18	1444.8	2	
	5254	8	59.3	6	1143.8	3	
	5258	9	68.8	16	1566.1	1	
	5259	10	88.5	18	1732.0	1	
	5260	11	56.2	19	1674.9	2	
	5255	12	78.8	8	1067.4	2	
	5258	13	76.6	15	1480.8	3	
	5257	14	96.3	12	1564.9	3	
	5256	15	75.6	9	1763.2	2	
6	5260	1	82.6	20	1843.4	1	1
	5255	2	63.7	8	1769.4	3	
	5256	3	95.5	10	1762.4	2	
	5257	4	57.6	13	1257.3	1	
	5258	5	53.7	15	1445.1	3	
	5257	6	61.0	13	1837.1	2	
	5256	7	57.3	9	1412.7	3	
	5254	8	77.3	6	1925.9	2	
	5257	9	58.6	12	1496.7	2	
	5256	10	51.8	9	1281.1	1	
	5254	11	95.3	6	1947.3	3	
	5255	12	86.0	7	1815.6	2	
	5256	13	56.6	9	1863.8	3	
	5259	14	54.9	18	1995.5	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5254	1	50.3	5	1927.1	1	1
	5260	2	94.3	19	1802.4	2	
	5260	3	93.9	20	1111.6	1	
	5256	4	94.1	9	1133.4	3	
	5259	5	98.8	18	1279.5	1	
	5256	6	53.2	10	1675.0	1	
	5255	7	51.5	8	1272.2	2	
	5259	8	61.8	18	1190.1	1	
	5256	9	88.3	10	1504.7	1	
	5257	10	74.3	13	1387.4	2	
	5260	11	96.1	19	1052.6	2	
	5256	12	92.4	11	1177.3	3	
	5256	13	97.0	11	1544.4	2	
	5257	14	63.7	12	1986.0	1	
	5255	15	96.0	7	1980.9	2	
	5255	16	85.2	8	1182.3	1	
	5255	17	73.7	7	1860.9	3	
8	5256	1	67.9	9	1143.8	3	1
	5254	2	74.5	5	1938.0	1	
	5258	3	67.8	16	1132.1	2	
	5254	4	82.1	6	1570.2	1	
	5256	5	82.4	9	1942.6	3	
	5256	6	99.7	9	1410.3	1	
	5255	7	73.0	7	1141.1	2	
	5255	8	81.2	8	1157.0	1	
	5260	9	54.6	19	1463.4	3	
	5260	10	93.8	19	1559.5	3	
	5254	11	52.3	5	1608.8	3	
	5255	12	75.4	7	1141.4	1	
	5258	13	91.8	15	1254.6	2	
	5255	14	92.0	8	1877.4	1	
	5254	15	53.8	6	1745.7	1	
	5257	16	64.8	12	1863.7	3	
	5257	17	87.9	12	1332.4	2	
	5259	18	88.1	18	1309.3	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5260	1	88.0	20	1149.6	2	1
	5257	2	55.5	13	1256.7	3	
	5260	3	92.2	19	1671.2	3	
	5259	4	68.0	17	1525.1	1	
	5256	5	92.8	10	1612.3	1	
	5259	6	77.0	17	1676.4	3	
	5258	7	76.8	14	1271.2	3	
	5258	8	98.9	15	1100.0	2	
	5257	9	78.5	13	1672.7	2	
	5256	10	63.8	11	1987.9	1	
	5258	11	69.2	14	1117.8	3	
	5256	12	63.0	10	1523.7	1	
	5259	13	52.7	17	1704.5	2	
	5259	14	92.5	18	1527.9	3	
	5255	15	80.4	8	1555.3	2	
	5255	16	73.1	7	1354.8	2	
	5257	17	69.5	13	1858.2	3	
	5257	18	73.0	13	1435.6	3	
	5259	19	79.1	18	1442.7	1	
10	5257	1	93.2	12	1491.0	2	1
	5259	2	75.8	17	1088.4	3	
	5259	3	51.0	17	1986.9	1	
	5255	4	81.4	8	1187.9	3	
	5254	5	94.0	6	1246.3	2	
	5257	6	90.7	13	1626.3	1	
	5258	7	54.0	15	1062.9	3	
	5256	8	98.7	10	1541.2	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	79.8	17	1238.0	2	1
	5290	2	95.7	10	1342.7	2	
	5290	3	65.4	15	1608.0	1	
	5290	4	53.0	15	1143.2	1	
	5290	5	92.4	5	1473.6	3	
	5290	6	86.8	13	1334.8	2	
	5290	7	71.9	7	1856.2	3	
	5290	8	90.2	13	1949.0	1	
	5290	9	97.9	18	1713.3	1	
	5290	10	62.4	14	1263.5	1	
	5290	11	73.3	5	1622.0	2	
	5290	12	75.0	6	1807.8	3	
	5290	13	61.6	9	1436.8	1	
	5290	14	94.4	12	1929.7	2	
	5290	15	85.2	7	1345.9	1	
	5290	16	51.5	14	1254.5	1	
12	5290	1	61.0	6	1017.0	3	1
	5290	2	54.6	20	1507.3	2	
	5290	3	83.9	11	1486.1	1	
	5290	4	50.5	15	1613.7	2	
	5290	5	61.8	6	1762.7	2	
	5290	6	58.1	15	1135.8	3	
	5290	7	90.1	11	1760.3	1	
	5290	8	92.7	12	1220.2	3	
	5290	9	88.6	17	1159.5	1	
	5290	10	78.7	6	1695.1	3	
	5290	11	56.5	5	1646.6	2	
	5290	12	66.0	6	1304.1	3	
	5290	13	86.9	15	1319.3	1	
	5290	14	61.1	19	1725.0	2	
	5290	15	74.2	16	1631.0	1	
	5290	16	79.7	5	1696.9	1	
	5290	17	77.9	13	1639.9	2	
	5290	18	77.6	8	1024.7	2	
	5290	19	61.5	20	1013.5	1	
	5290	20	58.1	11	1054.3	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	66.7	7	1774.1	1	1
	5290	2	94.3	14	1484.4	3	
	5290	3	95.1	8	1458.9	2	
	5290	4	89.2	9	1943.1	1	
	5290	5	66.4	7	1101.7	2	
	5290	6	59.8	12	1814.2	1	
	5290	7	97.5	19	1193.0	3	
	5290	8	84.9	9	1425.8	2	
	5290	9	76.7	16	1832.3	1	
	5290	10	72.7	14	1082.0	3	
14	5290	1	56.1	7	1514.2	3	1
	5290	2	94.0	20	1115.8	3	
	5290	3	82.1	19	1803.6	3	
	5290	4	74.6	11	1060.3	1	
	5290	5	88.5	13	1126.9	1	
	5290	6	75.6	16	1010.1	2	
	5290	7	78.2	6	1163.1	2	
	5290	8	90.7	9	1717.3	2	
	5290	9	98.1	7	1631.3	3	
	5290	10	83.0	15	1234.4	2	
	5290	11	73.7	18	1227.2	2	
	5290	12	76.3	17	1944.8	1	
	5290	13	59.9	17	1018.6	1	
	5290	14	97.1	12	1478.5	3	
	5290	15	78.8	12	1938.3	2	
	5290	16	88.5	9	1003.2	2	
	5290	17	97.1	16	1050.9	1	
	5290	18	56.0	19	1836.4	3	
	5290	19	86.7	11	1575.3	1	
	5290	20	59.7	11	1724.4	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	99.3	19	1272.3	2	1
	5290	2	66.3	18	1041.5	2	
	5290	3	84.8	9	1923.0	2	
	5290	4	91.2	14	1180.6	1	
	5290	5	73.2	13	1589.2	3	
	5290	6	57.9	9	1623.7	1	
	5290	7	97.4	7	1969.2	1	
	5290	8	79.0	6	1323.8	1	
	5290	9	90.0	20	1185.4	3	
	5290	10	81.2	14	1715.8	2	
	5290	11	61.0	19	1273.6	3	
	5290	12	99.6	9	1786.7	1	
	5290	13	95.0	5	1810.3	1	
	5290	14	94.0	14	1274.3	3	
	5290	15	52.1	11	1802.8	1	
	5290	16	89.3	13	1195.9	2	
	5290	17	84.2	5	1987.0	2	
	5290	18	51.3	8	1309.9	1	
	5290	19	98.2	12	1759.1	2	
16	5290	1	91.1	6	1858.1	2	1
	5290	2	52.1	14	1507.9	1	
	5290	3	50.9	5	1572.9	2	
	5290	4	69.8	11	1536.6	3	
	5290	5	91.8	19	1351.0	3	
	5290	6	93.7	19	1212.3	1	
	5290	7	71.0	6	1373.4	1	
	5290	8	84.6	16	1906.2	3	
	5290	9	55.7	16	1901.9	3	
	5290	10	75.5	14	1356.3	2	
	5290	11	58.0	18	1875.0	2	
	5290	12	54.5	9	1628.4	1	
	5290	13	91.1	16	1081.8	3	
	5290	14	88.6	19	1945.7	3	
	5290	15	51.1	11	1675.5	2	
	5290	16	67.4	8	1608.1	3	
	5290	17	90.9	8	1693.1	2	
	5290	18	91.6	12	1755.4	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	98.5	11	1997.5	1	1
	5290	2	96.4	10	1789.7	3	
	5290	3	68.1	6	1648.0	3	
	5290	4	81.3	10	1395.5	2	
	5290	5	87.5	8	1259.1	3	
	5290	6	63.5	16	1477.2	2	
	5290	7	72.5	17	1637.6	3	
	5290	8	75.8	11	1250.9	3	
	5290	9	92.5	8	1144.8	2	
	5290	10	52.4	9	1561.7	1	
	5290	11	60.6	14	1382.3	3	
	5290	12	95.1	10	1008.4	3	
	5290	13	54.6	20	1715.0	2	
	5290	14	55.1	16	1795.3	3	
	5290	15	73.9	9	1628.3	3	
	5290	16	92.1	16	1464.3	3	
	5290	17	95.9	12	1090.3	3	
18	5290	1	99.0	15	1530.1	3	1
	5290	2	55.8	19	1002.5	1	
	5290	3	94.9	7	1914.2	1	
	5290	4	93.0	11	1066.9	3	
	5290	5	91.8	7	1359.2	2	
	5290	6	87.3	11	1286.0	1	
	5290	7	84.3	13	1157.1	3	
	5290	8	76.6	10	1909.7	3	
	5290	9	89.9	13	1913.4	1	
	5290	10	67.9	10	1680.2	2	
	5290	11	62.1	15	1613.1	3	
	5290	12	83.0	13	1263.2	3	
	5290	13	90.4	16	1854.6	3	
	5290	14	58.3	10	1781.2	2	
	5290	15	55.7	18	1645.9	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	88.9	11	1888.2	1	1
	5290	2	58.8	9	1359.0	1	
	5290	3	91.3	10	1842.7	3	
	5290	4	94.9	10	1129.1	3	
	5290	5	58.5	12	1967.3	3	
	5290	6	78.9	6	1610.2	2	
	5290	7	65.1	12	1509.9	2	
	5290	8	54.8	19	1156.6	3	
	5290	9	70.7	16	1326.0	2	
	5290	10	64.4	10	1460.5	2	
	5290	11	51.1	17	1577.7	1	
	5290	12	67.7	15	1010.9	3	
	5290	13	88.8	9	1487.4	1	
	5290	14	52.3	9	1123.5	3	
20	5290	1	70.3	16	1304.0	3	1
	5290	2	84.8	14	1707.9	2	
	5290	3	59.6	17	1037.8	2	
	5290	4	54.9	17	1542.8	1	
	5290	5	63.8	11	1880.0	3	
	5290	6	68.6	6	1822.3	1	
	5290	7	56.2	7	1464.9	1	
	5290	8	79.0	13	1449.1	2	
	5290	9	92.3	18	1388.1	3	
	5290	10	54.9	9	1728.9	1	
21	5322	1	90.3	14	1890.4	2	1
	5324	2	90.9	10	1459.7	2	
	5325	3	73.6	7	1356.9	2	
	5322	4	66.6	14	1006.0	1	
	5323	5	62.1	13	1018.1	1	
	5325	6	76.4	7	1767.1	2	
	5321	7	70.5	17	1839.4	1	
	5322	8	85.1	14	1157.2	1	
	5324	9	64.6	11	1200.8	3	
	5320	10	55.8	20	1996.1	1	
	5325	11	52.1	8	1890.2	2	
	5325	12	96.6	8	1679.1	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5325	1	97.8	8	1809.8	2	1
	5323	2	73.7	13	1929.1	2	
	5322	3	69.5	15	1514.5	3	
	5323	4	73.4	12	1449.9	1	
	5322	5	69.1	15	1661.4	1	
	5322	6	91.0	14	1891.4	1	
	5326	7	71.6	6	1936.6	1	
	5326	8	59.8	6	1539.8	1	
	5325	9	84.9	8	1774.1	3	
23	5326	1	63.1	6	1753.7	1	1
	5324	2	76.4	9	1522.6	2	
	5322	3	82.4	14	1703.8	2	
	5322	4	60.2	14	1388.4	1	
	5320	5	56.1	19	1715.2	2	
	5326	6	62.7	6	1713.8	2	
	5321	7	75.2	17	1372.9	3	
	5321	8	69.1	17	1290.4	2	
	5323	9	91.0	12	1375.7	3	
	5321	10	82.5	18	1331.0	3	
	5322	11	85.3	15	1959.9	3	
	5326	12	89.1	5	1131.6	1	
	5320	13	72.8	19	1012.3	3	
	5321	14	98.1	18	1374.0	1	
	5323	15	54.7	13	1341.3	1	
24	5321	1	70.7	17	1019.8	2	1
	5323	2	88.1	12	1701.4	3	
	5322	3	78.2	16	1271.7	3	
	5323	4	86.3	12	1101.7	2	
	5326	5	76.9	5	1306.2	2	
	5324	6	86.5	10	1239.5	2	
	5322	7	61.1	15	1148.2	3	
	5323	8	74.3	13	1750.7	1	
	5322	9	68.1	15	1289.3	3	
	5324	10	60.8	10	1099.3	1	
	5321	11	91.1	17	1104.9	3	
	5324	12	94.1	11	1586.4	3	
	5320	13	88.4	19	1568.3	1	
	5324	14	71.7	9	1614.2	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324	1	70.6	11	1615.1	1	1
	5323	2	53.1	12	1502.7	1	
	5325	3	58.0	7	1458.5	2	
	5324	4	99.1	11	1663.0	1	
	5321	5	65.8	17	1321.6	3	
	5323	6	61.2	12	1762.2	3	
	5324	7	82.6	9	1551.0	2	
	5323	8	57.7	12	1526.8	1	
	5324	9	62.6	10	1144.9	2	
	5325	10	78.6	8	1678.3	2	
	5321	11	64.0	18	1416.2	2	
	5326	12	86.3	6	1195.2	3	
	5321	13	88.6	17	1616.6	1	
	5320	14	61.6	19	1786.3	1	
	5324	15	56.4	10	1140.6	1	
	5325	16	79.4	8	1115.2	2	
	5323	17	98.2	12	1901.6	3	
	5324	18	67.7	10	1482.4	2	
26	5324	1	77.0	11	1075.8	3	1
	5323	2	85.3	12	1359.5	1	
	5321	3	85.4	18	1968.4	1	
	5322	4	73.7	15	1885.8	2	
	5324	5	66.0	10	1364.2	1	
	5324	6	69.5	11	1861.2	2	
	5322	7	73.3	15	1925.4	3	
	5324	8	94.4	11	1988.2	2	
	5322	9	82.7	14	1837.8	1	
	5326	10	71.5	6	1955.0	3	
	5323	11	93.6	12	1369.2	1	
	5325	12	87.9	8	1896.9	3	
	5326	13	95.5	5	1522.6	1	
	5326	14	65.1	6	1369.0	2	
	5326	15	92.4	6	1357.6	1	
	5324	16	77.5	11	1979.1	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5321	1	85.7	17	1776.7	2	1
	5325	2	62.4	7	1444.9	2	
	5321	3	97.5	18	1102.6	1	
	5322	4	71.0	14	1683.3	3	
	5321	5	85.7	17	1359.6	3	
	5321	6	93.9	17	1459.8	1	
	5326	7	65.3	5	1293.1	2	
	5324	8	62.1	9	1620.2	3	
	5322	9	97.3	15	1377.0	2	
	5324	10	86.0	11	1902.8	3	
	5323	11	54.9	12	1589.6	2	
	5326	12	54.5	5	1500.1	3	
	5323	13	76.8	12	1073.6	1	
	5320	14	57.4	20	1413.4	1	
	5324	15	95.3	9	1422.2	1	
	5321	16	74.5	18	1620.2	2	
	5322	17	68.5	16	1938.8	2	
	5324	18	58.8	11	1549.4	1	
	5322	19	81.4	14	1668.0	1	
	5325	20	50.0	7	1280.9	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5324	1	67.5	10	1612.1	1	1
	5320	2	72.8	19	1265.6	2	
	5324	3	87.6	11	1273.7	3	
	5321	4	63.0	17	1189.0	2	
	5322	5	89.9	15	1482.4	2	
	5322	6	71.1	16	1321.2	1	
	5321	7	60.3	17	1038.8	2	
	5325	8	92.8	7	1236.8	3	
	5325	9	77.5	7	1410.8	1	
	5325	10	81.1	7	1711.8	2	
	5324	11	72.8	9	1364.2	2	
	5326	12	98.1	6	1185.8	3	
	5322	13	53.5	16	1640.7	3	
	5322	14	94.7	15	1780.6	2	
	5321	15	60.4	17	1516.5	1	
	5323	16	56.5	13	1005.3	3	
	5326	17	73.5	5	1048.7	2	
	5324	18	56.0	11	1955.3	2	
	5322	19	67.6	16	1938.2	2	
	5320	20	95.2	19	1686.5	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5325	1	96.8	7	1844.8	2	1
	5322	2	70.9	15	1058.2	2	
	5320	3	72.7	19	1895.9	1	
	5322	4	83.2	15	1004.1	3	
	5325	5	83.5	7	1495.1	1	
	5320	6	81.9	19	1600.9	1	
	5322	7	87.5	15	1467.2	2	
	5320	8	91.7	19	1392.6	3	
	5322	9	93.8	14	1680.0	3	
	5324	10	72.4	11	1045.3	3	
	5326	11	94.6	6	1361.8	3	
	5326	12	93.1	5	1641.0	3	
	5324	13	55.0	10	1405.2	2	
	5321	14	53.1	18	1352.3	3	
	5324	15	96.4	10	1501.4	2	
	5325	16	63.6	8	1531.2	3	
	5322	17	99.0	16	1289.5	3	
30	5323	1	82.5	12	1464.3	2	1
	5326	2	50.6	6	1859.2	3	
	5325	3	60.4	7	1243.1	3	
	5322	4	85.6	16	1720.2	3	
	5320	5	80.7	19	1103.7	3	
	5321	6	68.2	18	1568.0	1	
	5325	7	99.5	8	1131.3	2	
	5324	8	62.4	11	1810.4	3	
	5324	9	82.5	11	1735.2	3	
	5324	10	82.2	11	1613.1	3	
	5320	11	82.9	20	1811.7	3	
	5321	12	50.6	18	1663.9	1	
	5325	13	53.3	7	1835.4	2	
	5323	14	64.6	13	1368.4	3	
Detection Percentage (%)							100.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---