


**Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140\_ANT1**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH100   | 5500               | 26.51                   | 17.80                           |
| CH116   | 5580               | 41.80                   | 26.70                           |
| CH140   | 5700               | 23.91                   | 17.70                           |

**TX CH100**

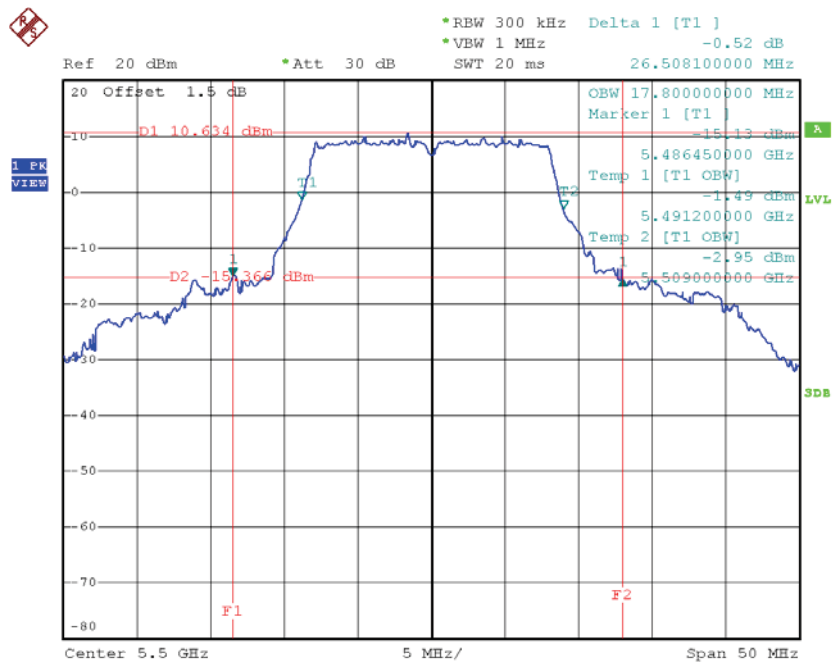


Date: 18.JUN.2016 17:33:24

### TX CH116

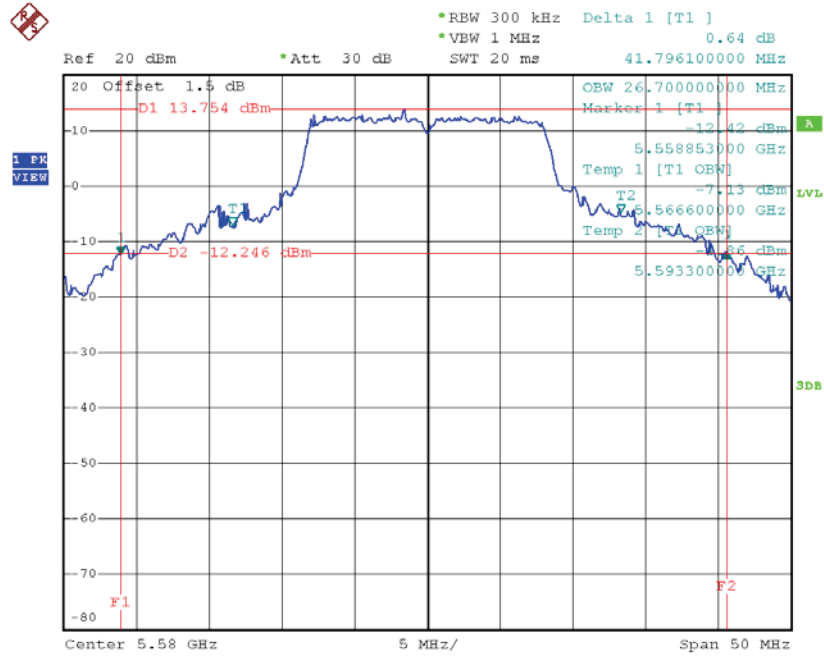

Date: 18.JUN.2016 17:36:34

### TX CH140

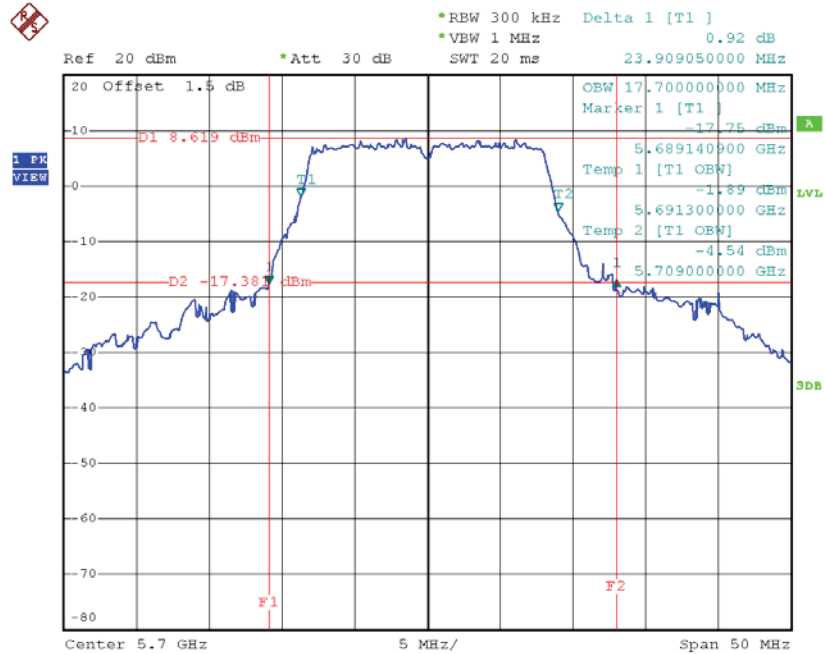


Date: 18.JUN.2016 17:38:00

Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH100   | 5500               | 31.29                   | 17.90                           |
| CH116   | 5580               | 42.00                   | 26.40                           |
| CH140   | 5700               | 23.71                   | 17.70                           |

TX CH100

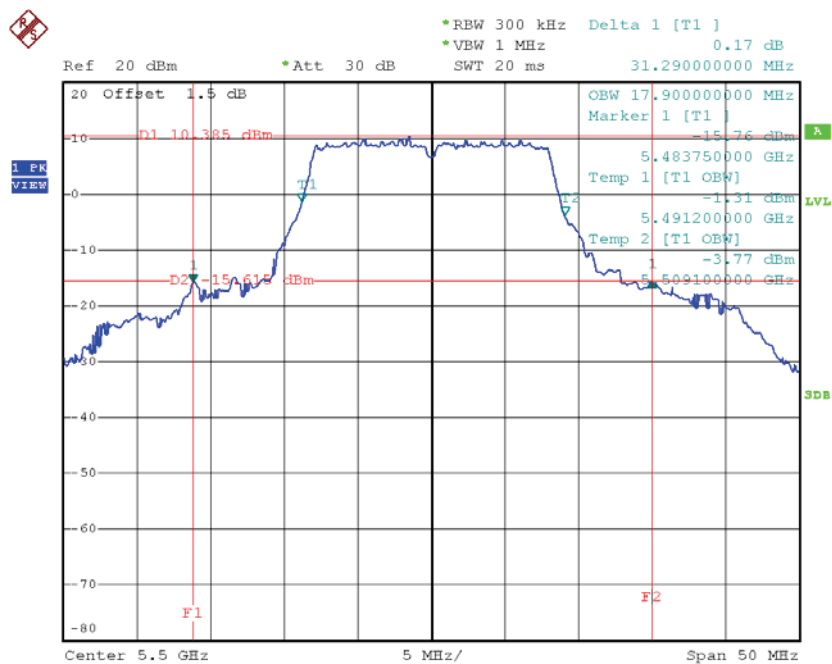


Date: 18.JUN.2016 17:34:21

### TX CH116

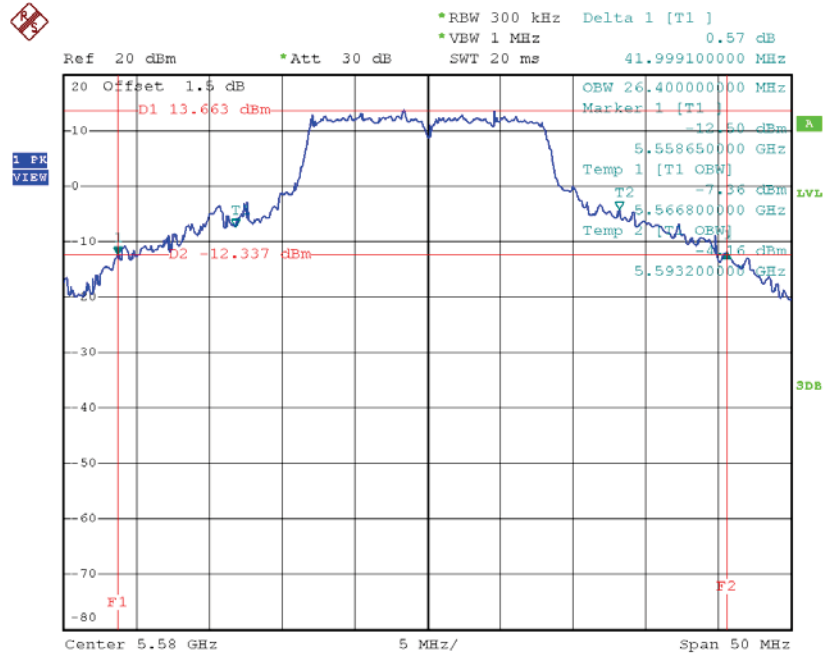

Date: 18.JUN.2016 17:35:59

### TX CH140

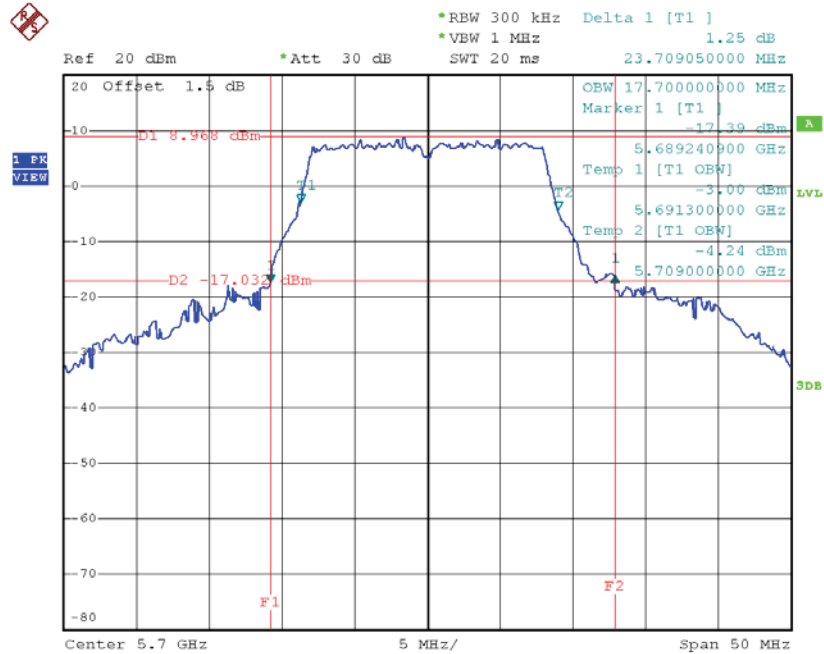


Date: 18.JUN.2016 17:38:39

Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT1


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH100   | 5500               | 21.89                   | 18.10                           |
| CH116   | 5580               | 25.80                   | 18.20                           |
| CH140   | 5700               | 30.09                   | 18.50                           |

TX CH100

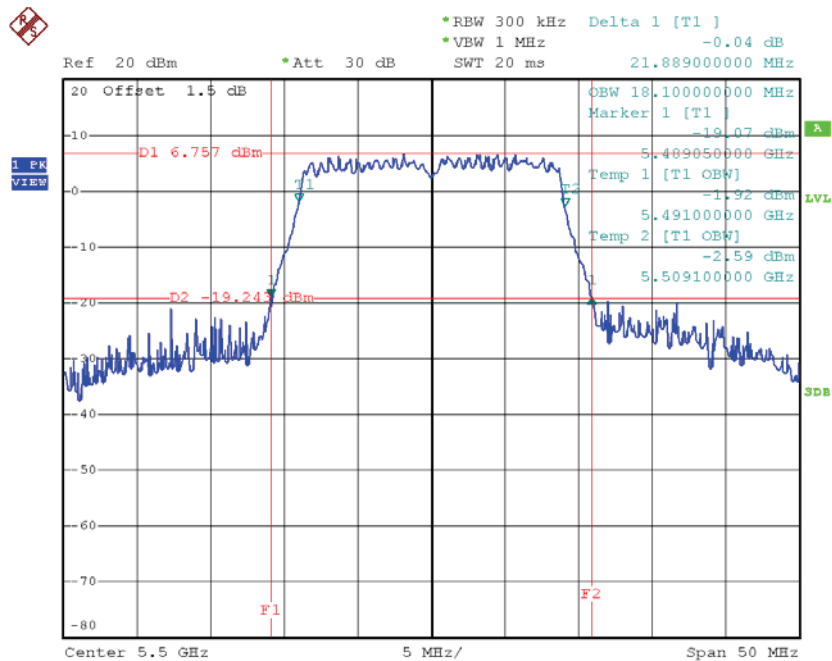


Date: 18.JUN.2016 17:59:19

### TX CH116

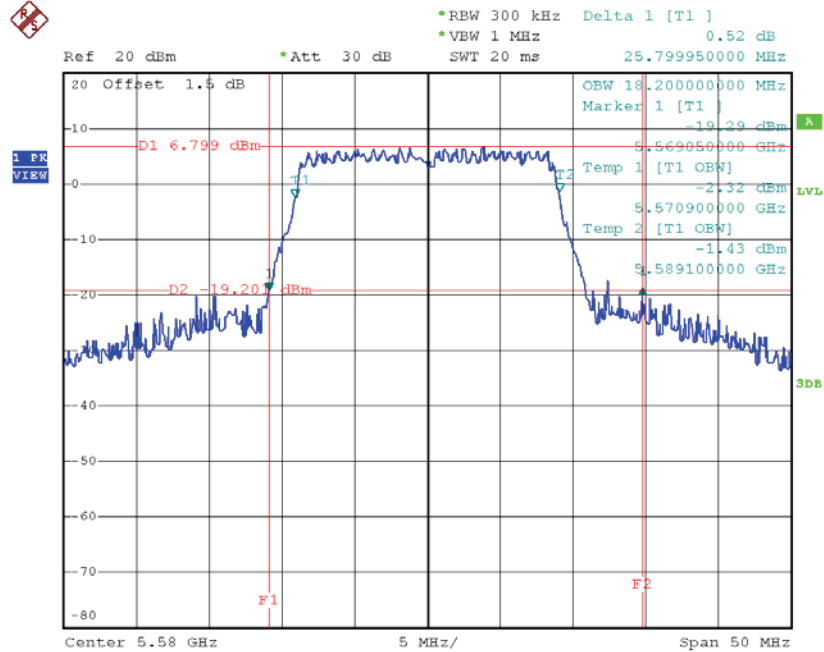

Date: 18.JUN.2016 18:00:05

### TX CH140

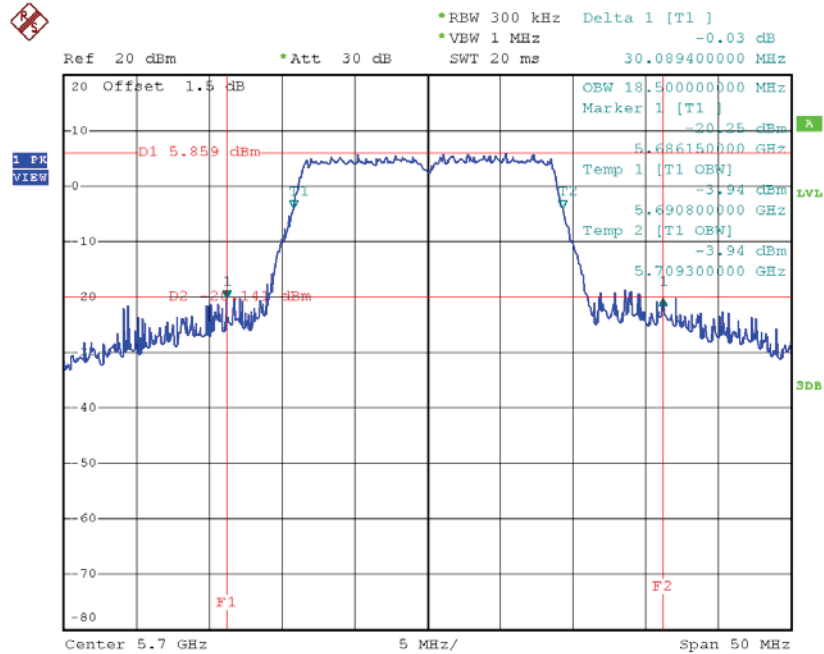


Date: 18.JUN.2016 18:02:34

Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH100   | 5500               | 21.80                   | 18.10                           |
| CH116   | 5580               | 26.70                   | 18.40                           |
| CH140   | 5700               | 27.80                   | 18.50                           |

TX CH100

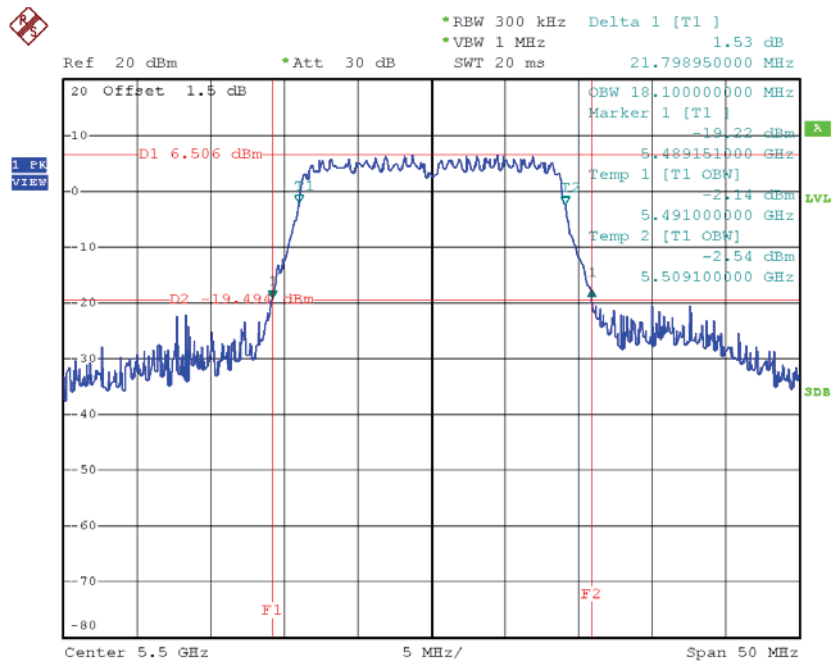


Date: 18.JUN.2016 17:58:24

### TX CH116

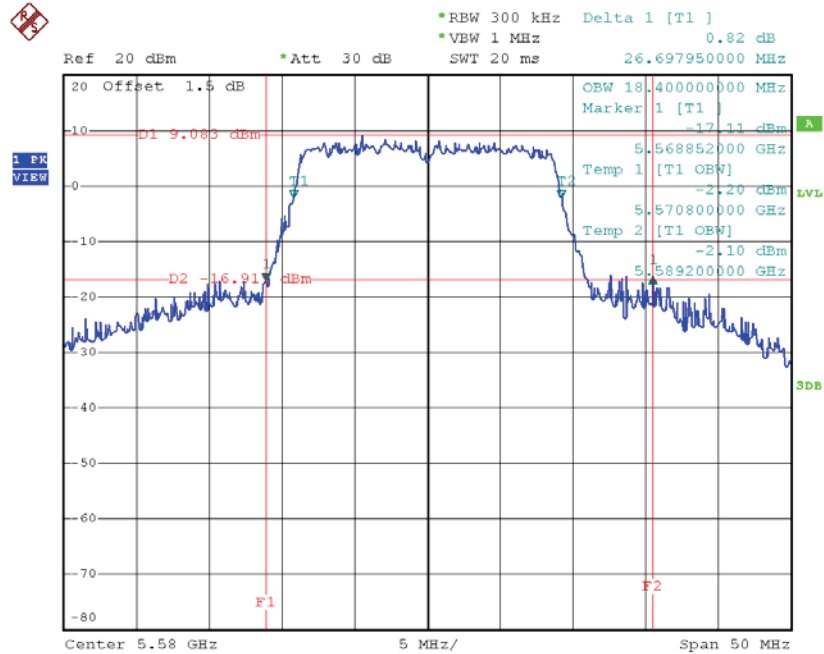

Date: 18.JUN.2016 18:00:55

### TX CH140

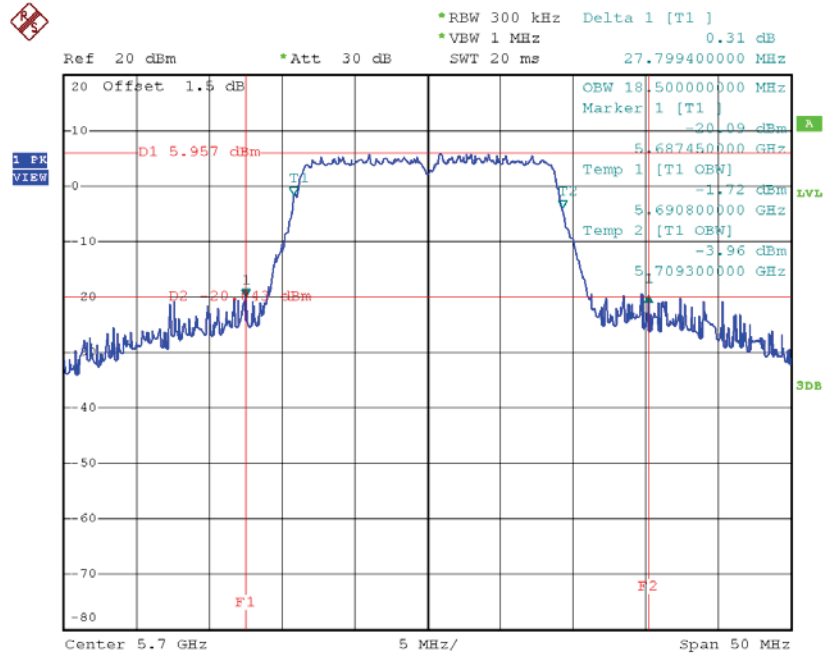


Date: 18.JUN.2016 18:01:57

Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT1


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH102   | 5510               | 45.50                   | 36.40                           |
| CH110   | 5550               | 66.60                   | 36.80                           |
| CH134   | 5670               | 58.40                   | 36.60                           |

TX CH102

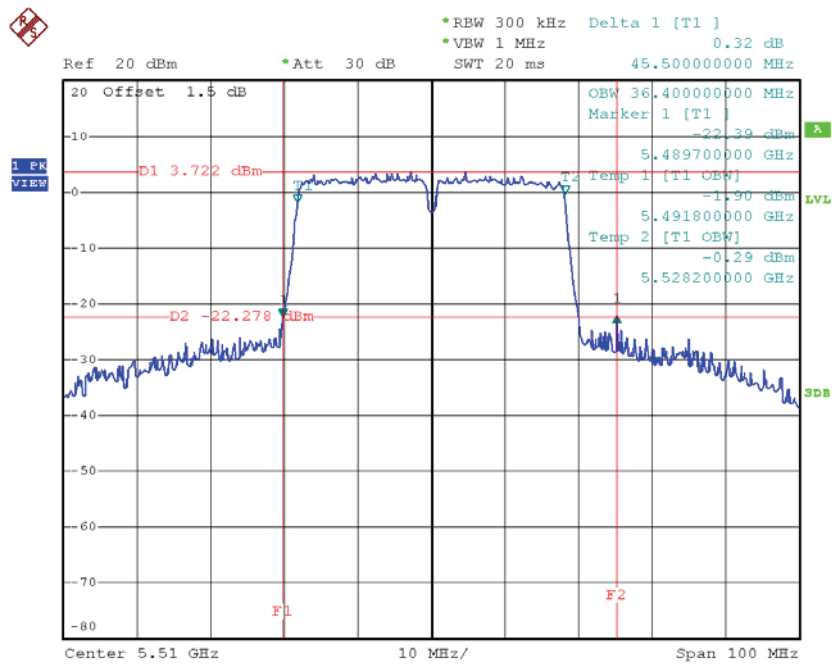


Date: 18.JUN.2016 18:16:53

### TX CH110

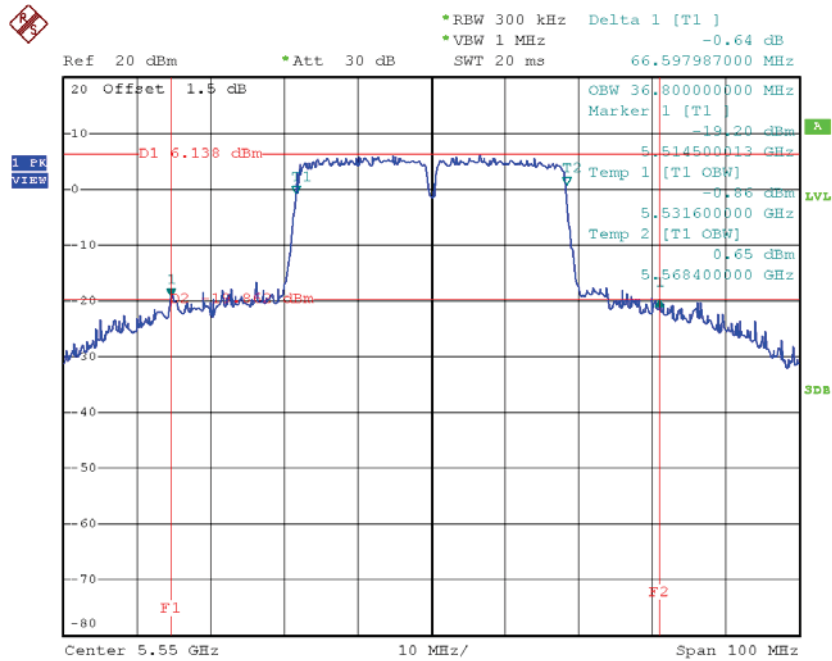

Date: 18.JUN.2016 18:20:13

### TX CH134

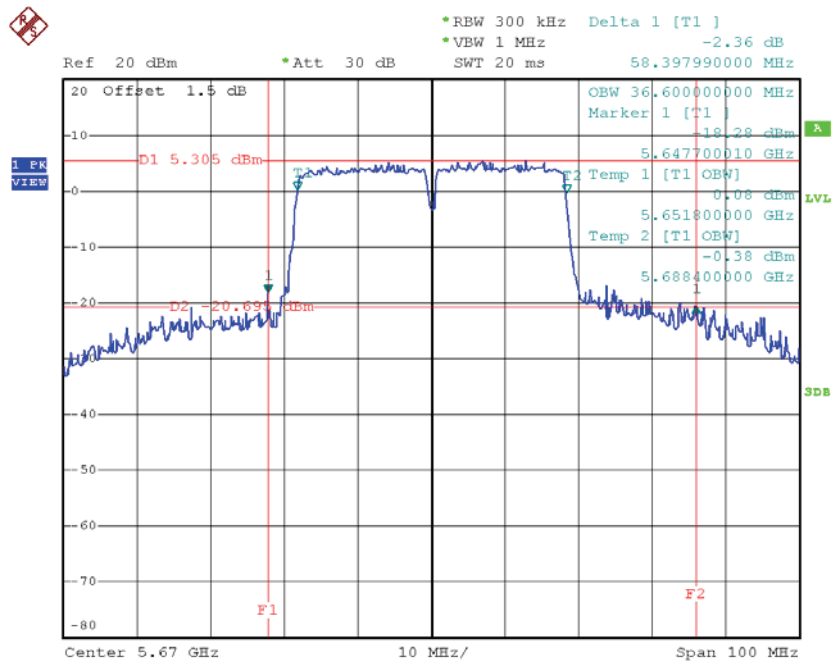


Date: 18.JUN.2016 18:21:03

Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH102   | 5510               | 39.59                   | 36.20                           |
| CH110   | 5550               | 39.59                   | 36.40                           |
| CH134   | 5670               | 40.50                   | 36.40                           |

TX CH102

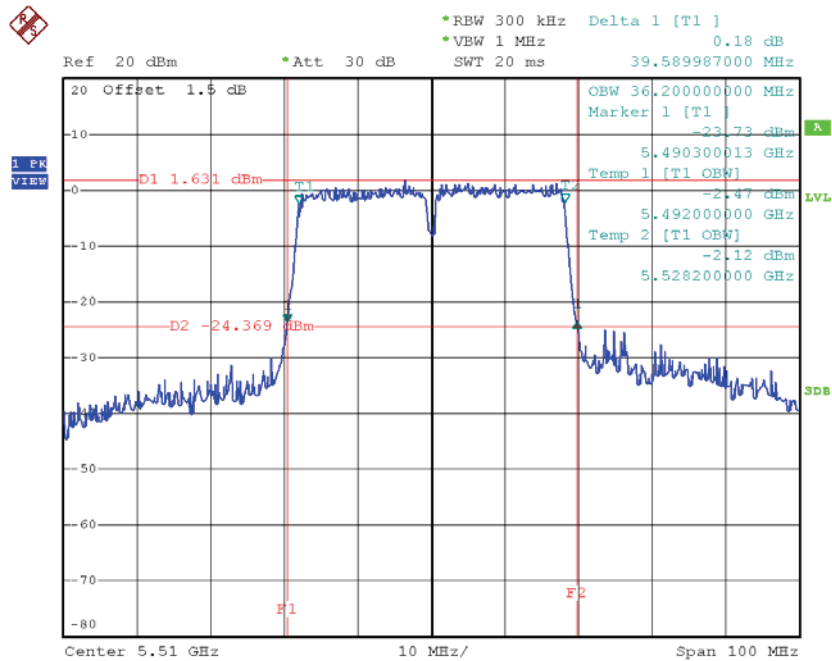


Date: 18.JUN.2016 18:17:54

### TX CH110

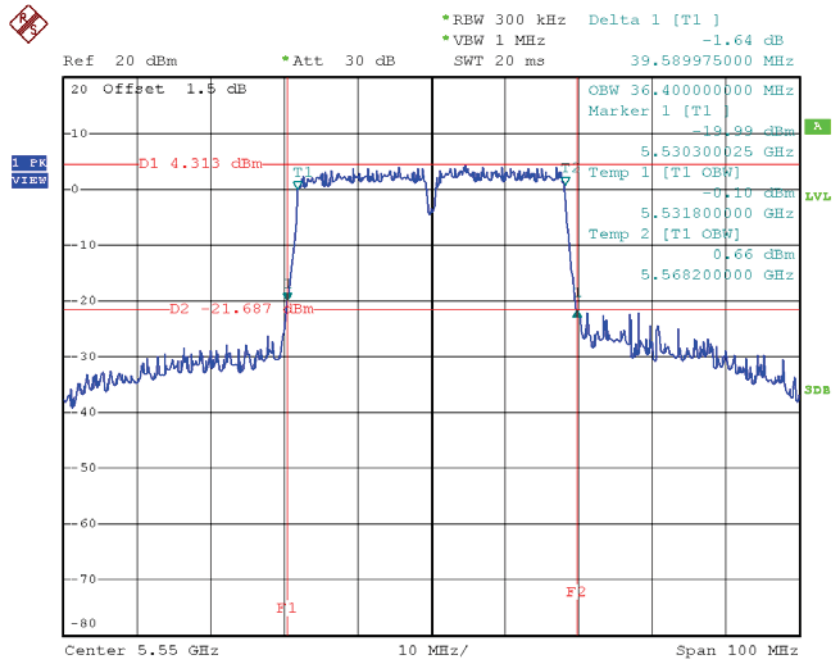

Date: 18.JUN.2016 18:19:11

### TX CH134

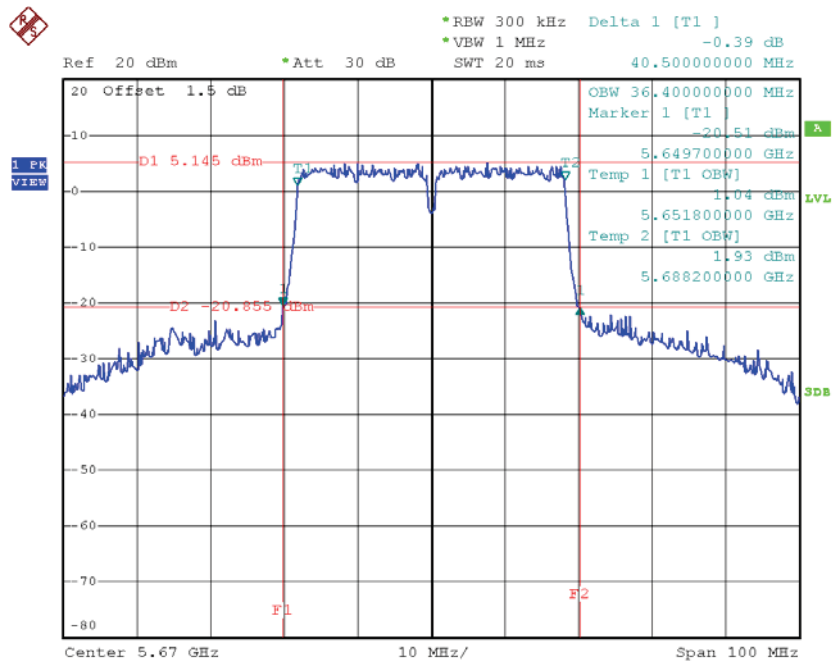


Date: 18.JUN.2016 18:21:53

Test Mode: UNII-3/ TX A Mode\_CH149/CH157/CH165\_ANT1


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149   | 5745            | 16.35               | 32.90                        | >=500       |
| CH157   | 5785            | 16.35               | 33.50                        | >=500       |
| CH165   | 5825            | 16.35               | 34.20                        | >=500       |

TX CH 149

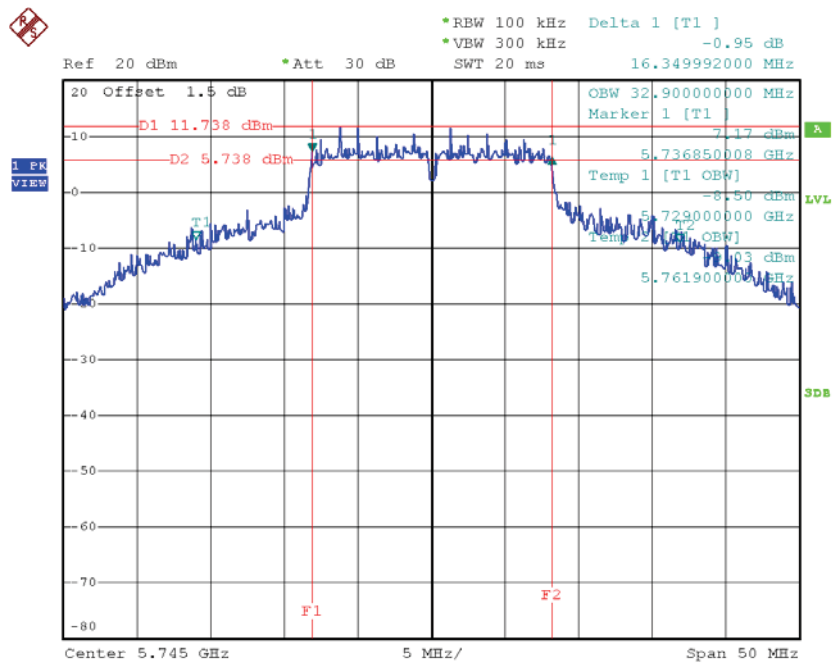


Date: 18.JUN.2016 17:40:30

### TX CH 157

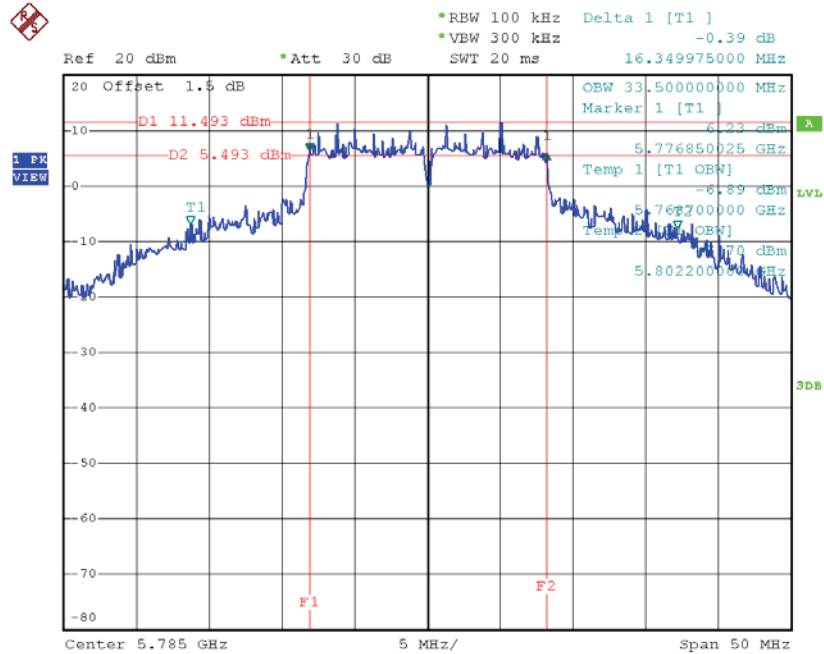

Date: 18.JUN.2016 17:41:46

### TX CH 165

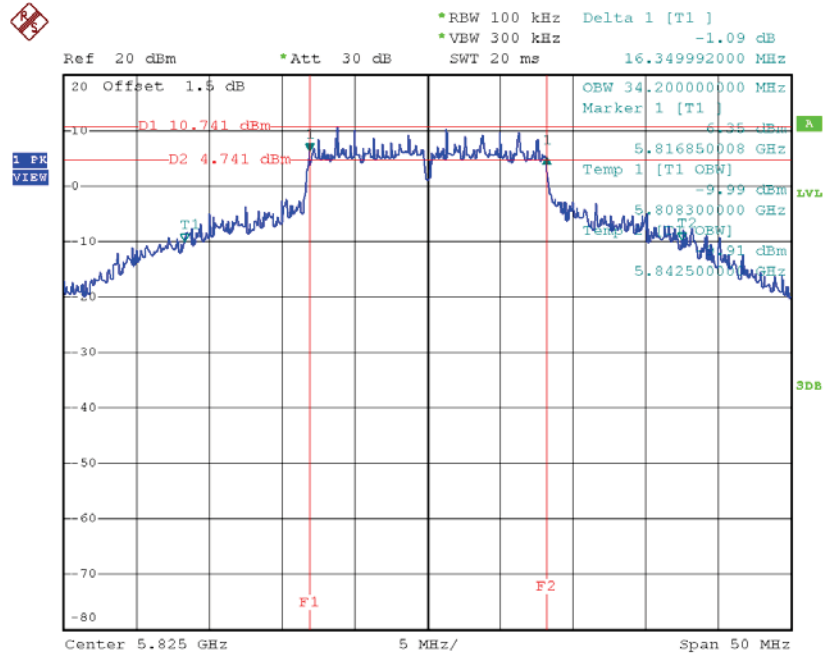


Date: 18.JUN.2016 17:45:14

Test Mode: UNII-3/ TX A Mode\_CH149/CH157/CH165\_ANT2


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149   | 5745            | 16.35               | 32.90                        | >=500       |
| CH157   | 5785            | 16.41               | 33.30                        | >=500       |
| CH165   | 5825            | 16.35               | 34.30                        | >=500       |

TX CH 149

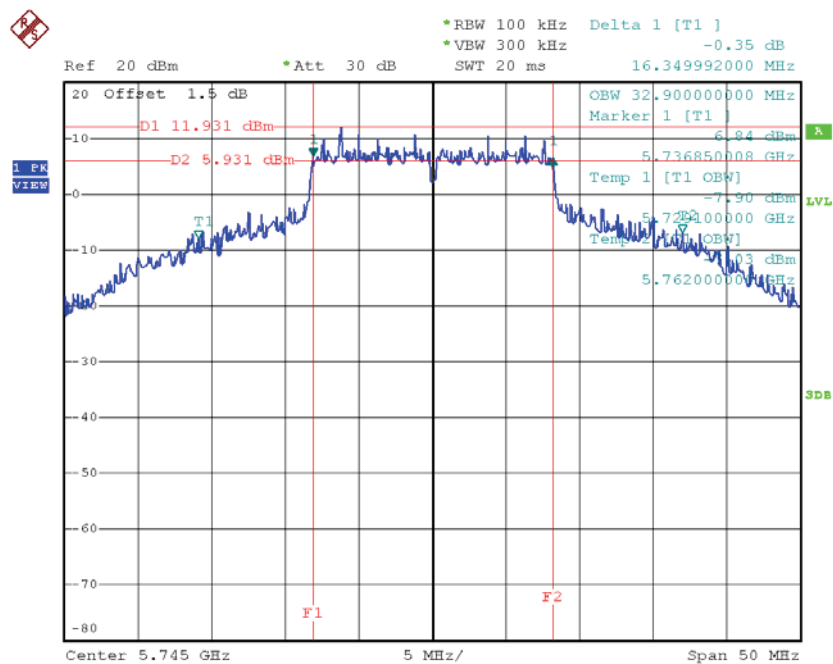


Date: 18.JUN.2016 17:39:35

### TX CH 157

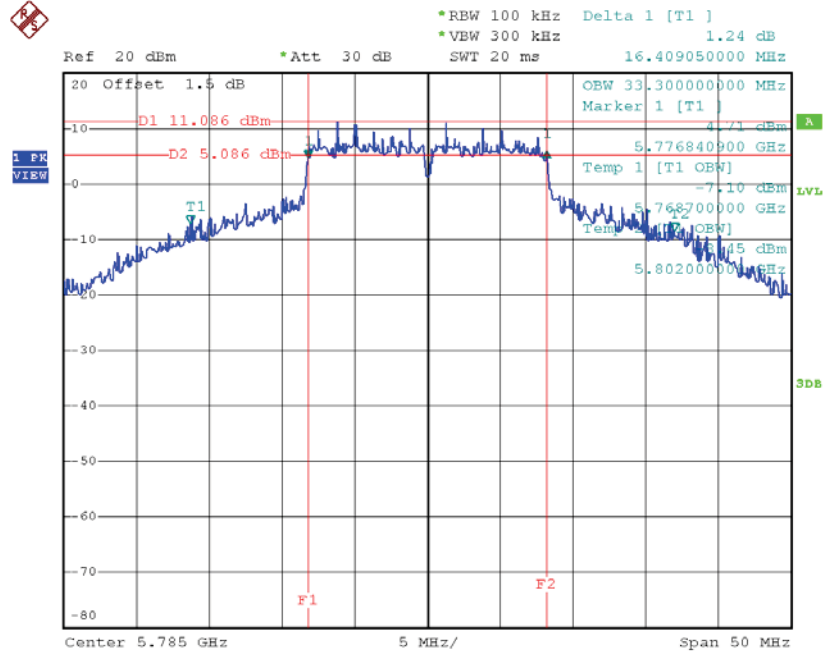

Date: 18.JUN.2016 17:42:39

### TX CH 165

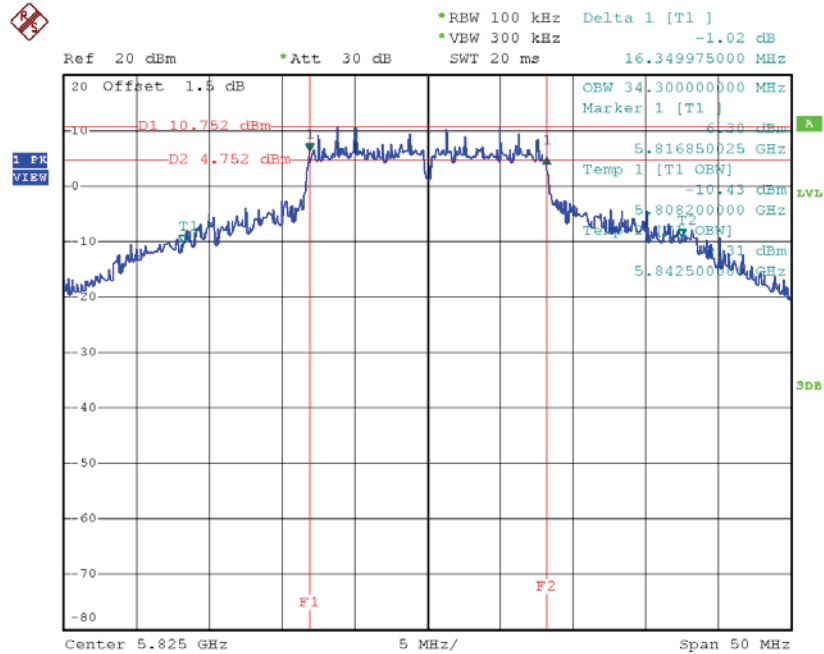

Date: 18.JUN.2016 17:43:55

| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH149   | 5745               | 17.39                  | 31.50                           | >=500          |
| CH157   | 5785               | 17.19                  | 35.70                           | >=500          |
| CH165   | 5825               | 17.55                  | 35.10                           | >=500          |


\*RBW 100 kHz Delta 1 [T1]  
 \*VBW 300 kHz -0.15 dB  
 Ref 20 dBm \*Att 30 dB SWT 20 ms 17.389392000 MHz

20 Offset 1.5 dB  
 D1 11.064 dBm  
 D2 5.064 dBm  
 T1  
 OBW 31.500000000 MHz  
 Marker 1 [T1]  
 5.736250008 GHz  
 Temp 1 [T1 OBW]  
 5.729800000 GHz  
 5.761300000 GHz

Center 5.745 GHz 5 MHz/ Span 50 MHz


Report No.: BTL-FCCP-4-1602C038

### TX CH 157

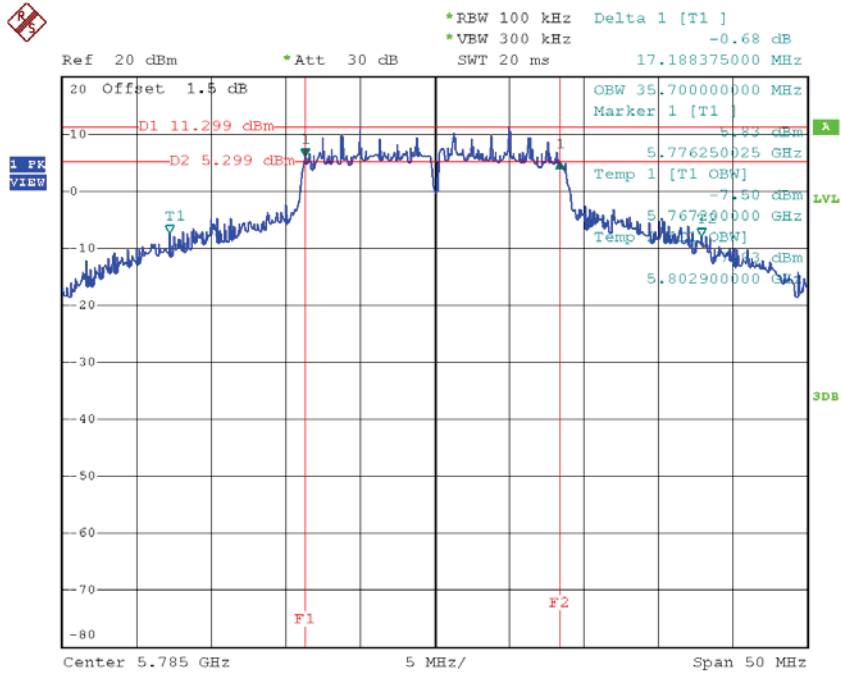

Date: 18.JUN.2016 18:06:02

### TX CH 165

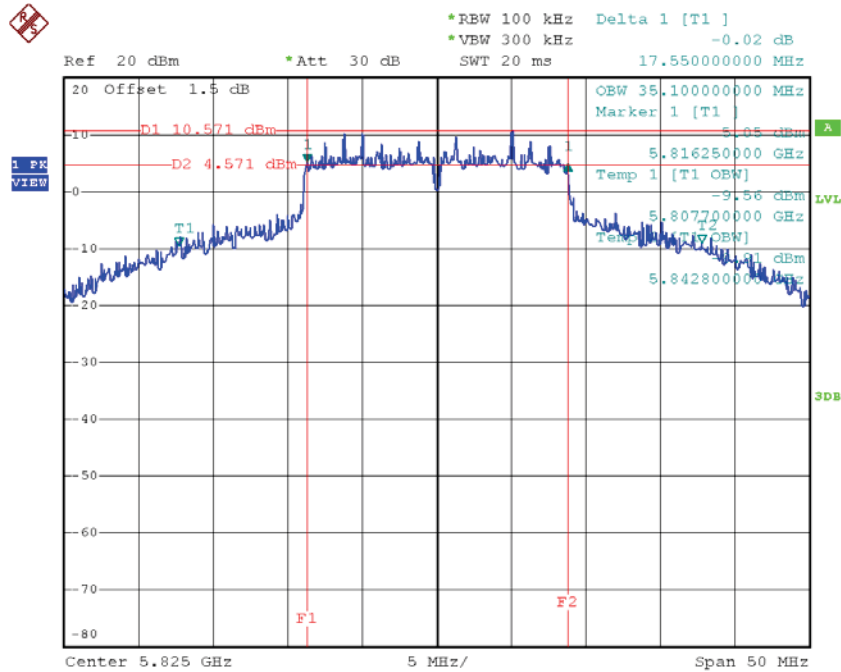


Date: 18.JUN.2016 18:07:05

Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_ANT2


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH149   | 5745               | 17.55                  | 28.90                           | >=500          |
| CH157   | 5785               | 17.55                  | 30.30                           | >=500          |
| CH165   | 5825               | 17.59                  | 35.20                           | >=500          |

TX CH 149

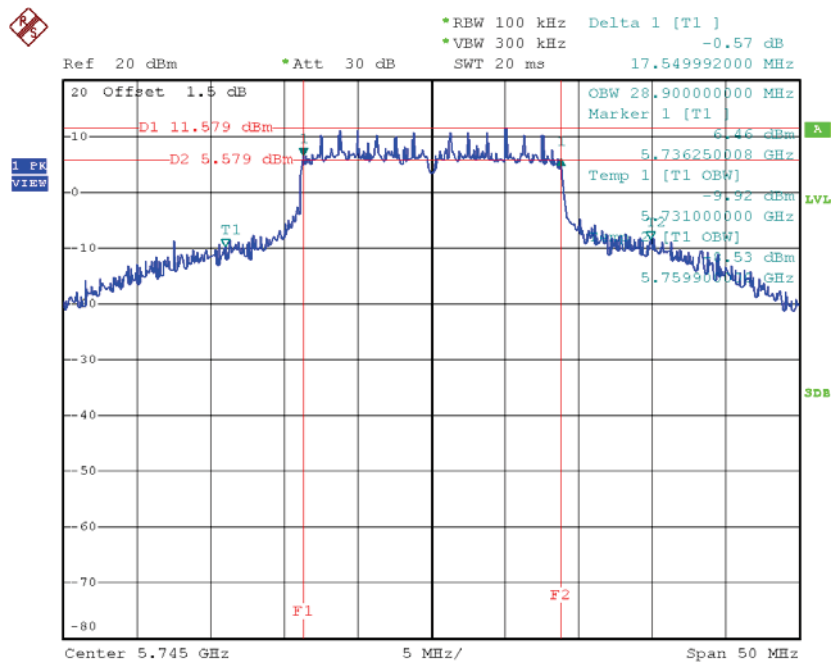


Date: 18.JUN.2016 18:04:11

### TX CH 157

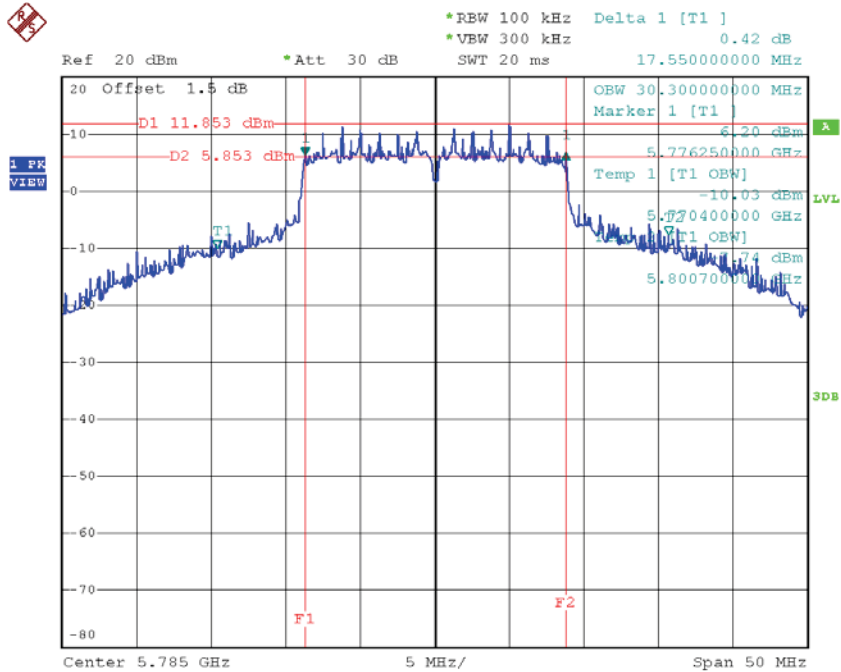

Date: 18.JUN.2016 18:05:05

### TX CH 165

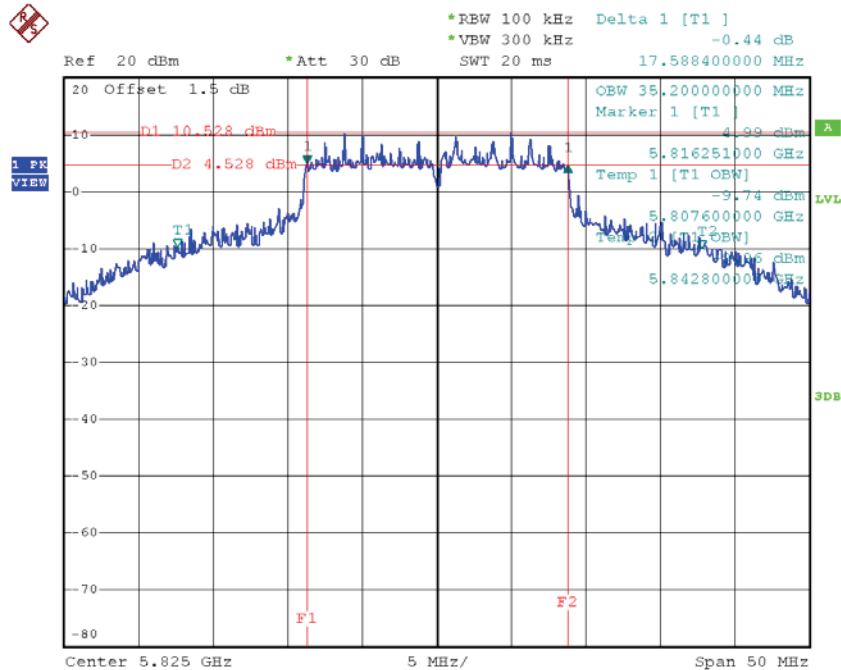


Date: 18.JUN.2016 18:07:57

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT1**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151   | 5755               | 36.50                  | 71.80                           | $\geq 500$     |
| CH159   | 5795               | 36.50                  | 70.00                           | $\geq 500$     |

### TX CH 151

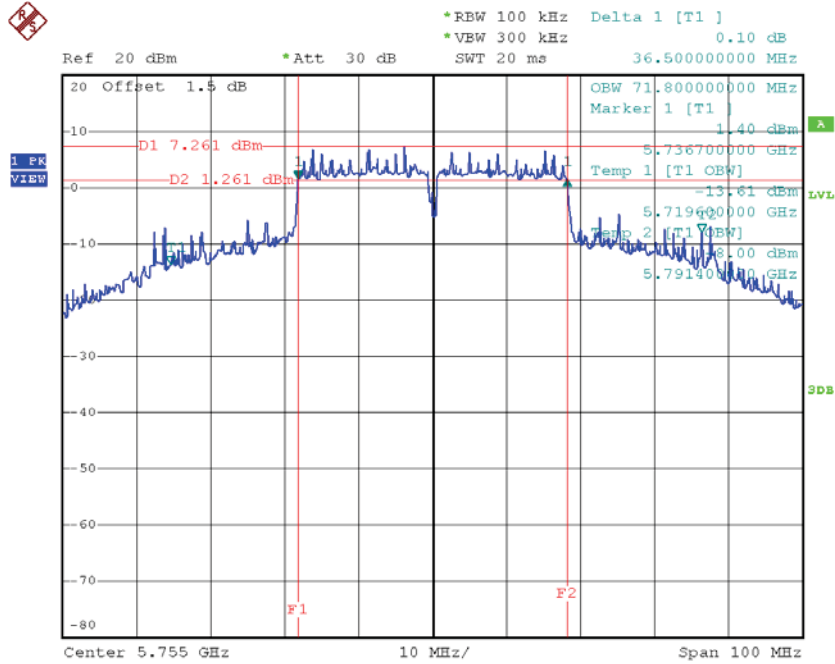

Date: 18.JUN.2016 18:24:02

### TX CH 159

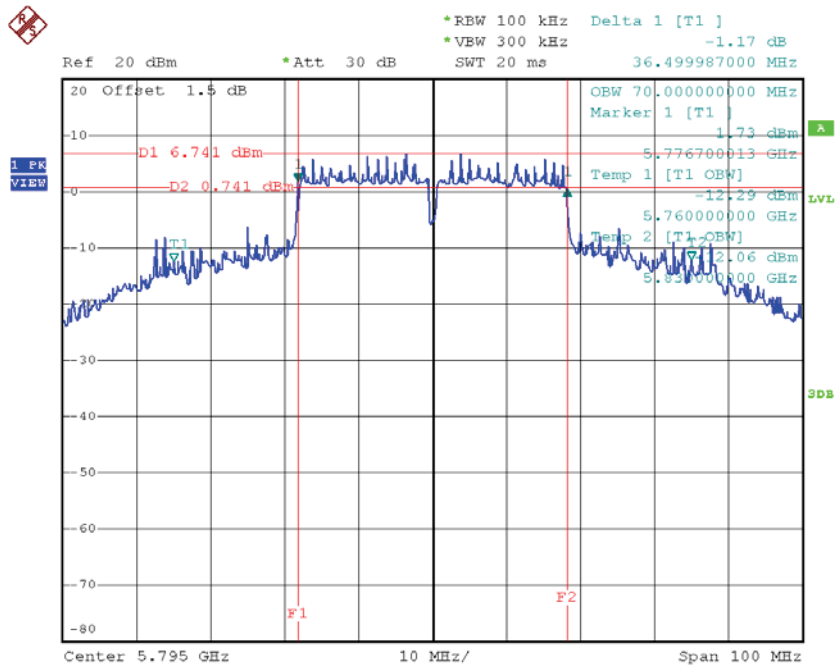


Date: 18.JUN.2016 18:24:50

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT2**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151   | 5755               | 36.50                  | 66.20                           | $\geq 500$     |
| CH159   | 5795               | 36.50                  | 64.20                           | $\geq 500$     |

### TX CH 151

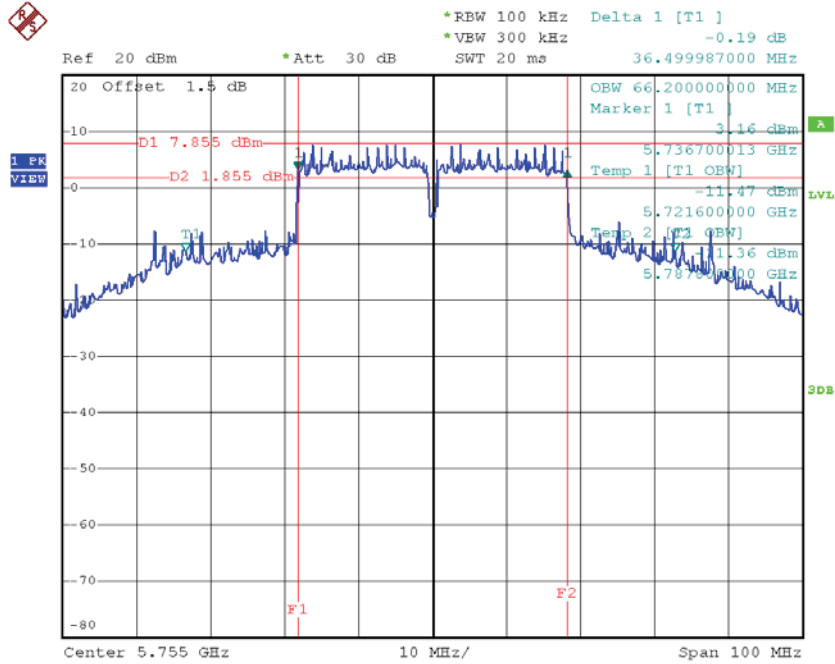

Date: 18.JUN.2016 18:23:16

### TX CH 159

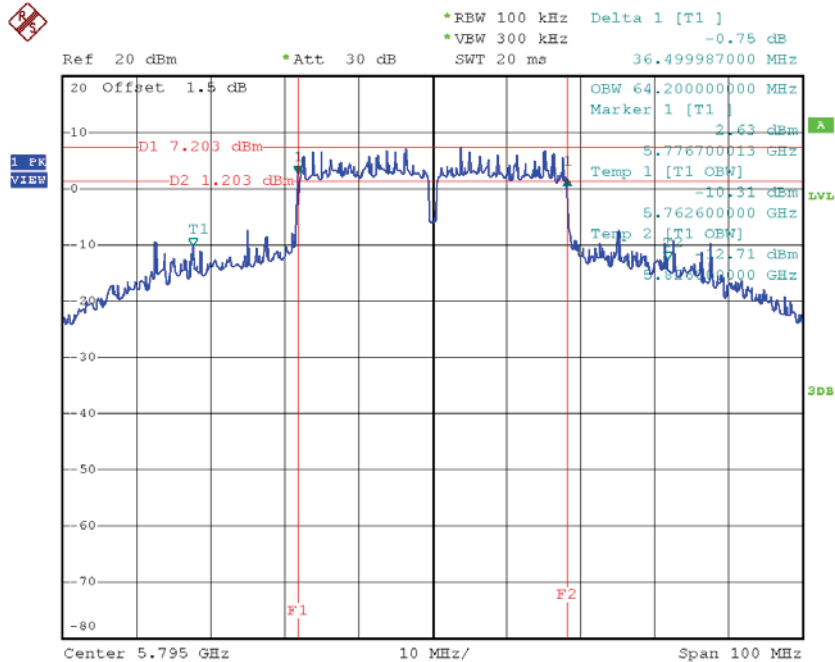


Date: 18.JUN.2016 18:25:39

Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT1


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH36    | 5180               | 37.50                   | 19.30                           |
| CH40    | 5200               | 37.90                   | 18.80                           |
| CH48    | 5240               | 32.90                   | 18.90                           |

TX CH36

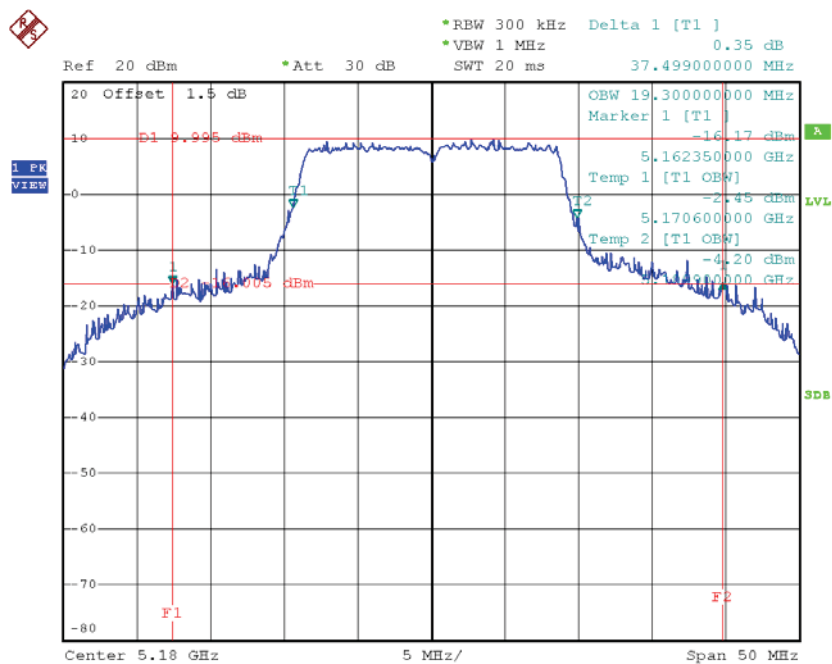


Date: 18.JUN.2016 15:26:16

### TX CH40

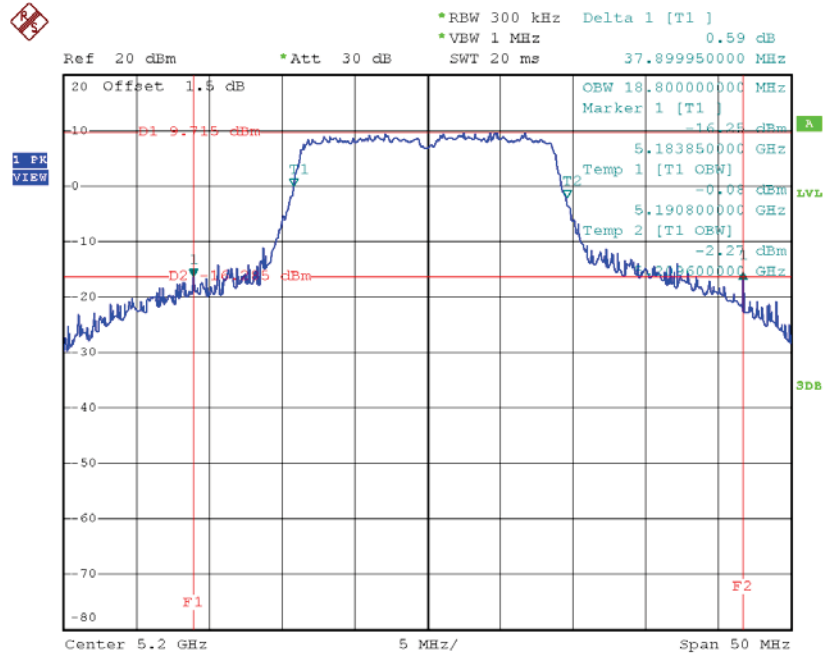

Date: 18.JUN.2016 15:29:57

### TX CH48

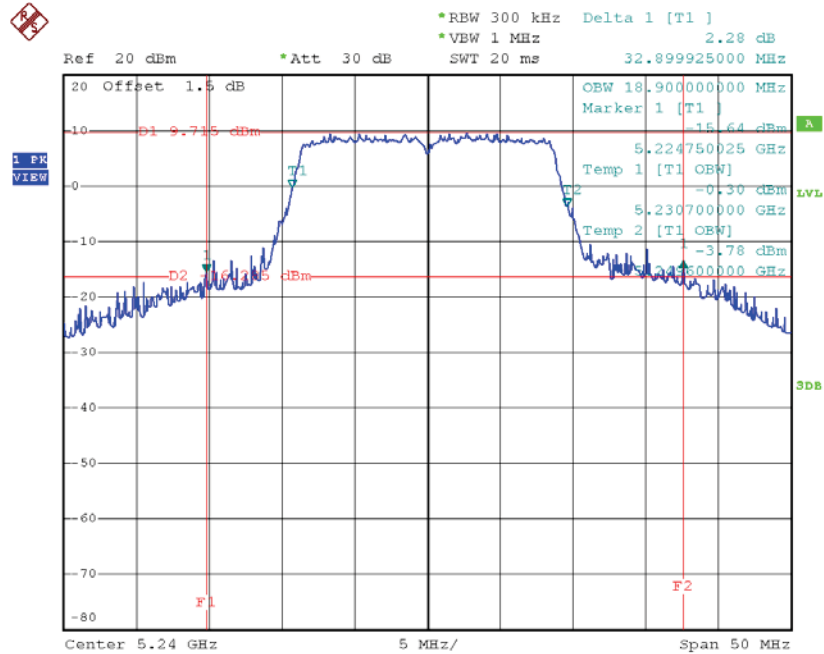


Date: 18.JUN.2016 15:31:08

Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH36    | 5180               | 33.28                   | 18.50                           |
| CH40    | 5200               | 29.10                   | 18.30                           |
| CH48    | 5240               | 30.15                   | 18.30                           |

TX CH36

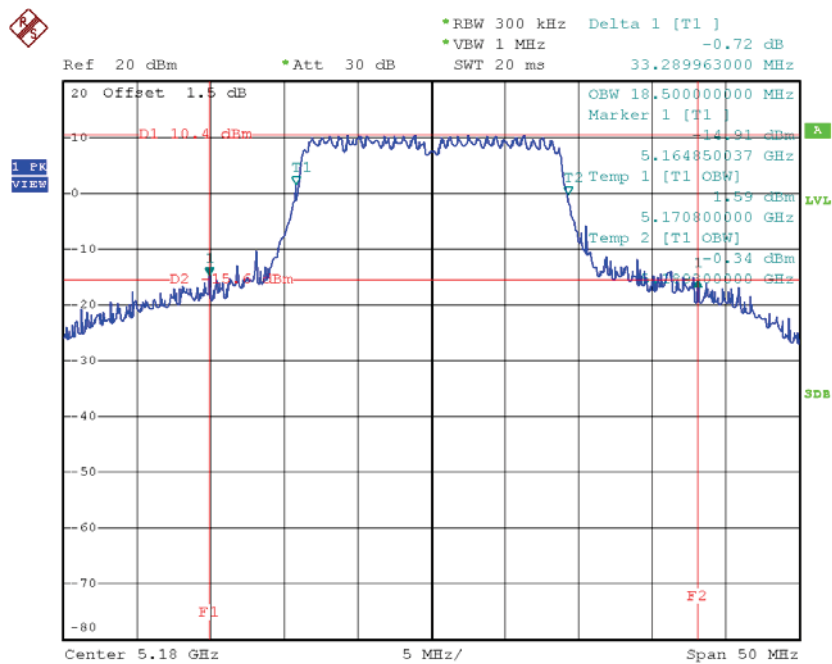


Date: 18.JUN.2016 15:19:23

### TX CH40

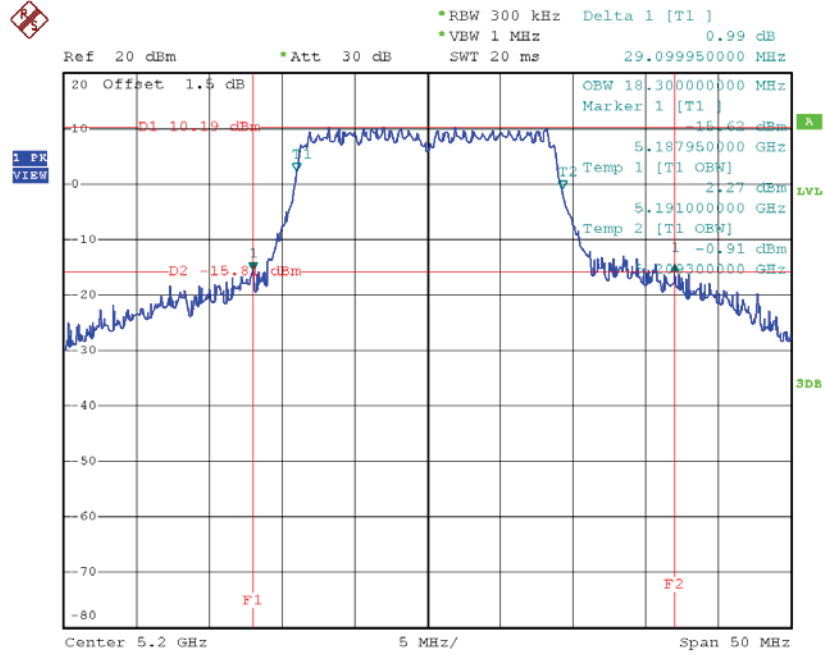

Date: 18.JUN.2016 15:51:06

### TX CH48

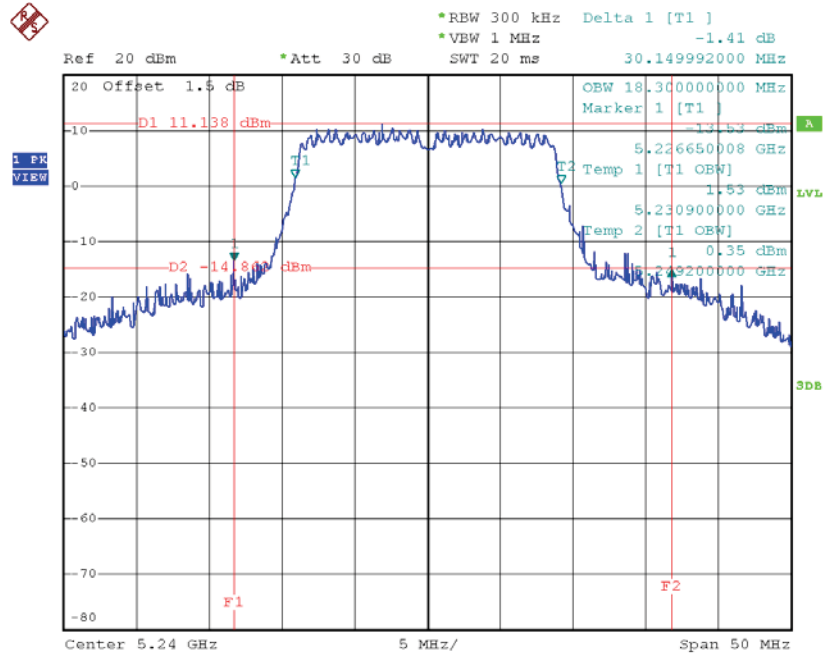


Date: 18.JUN.2016 15:52:17

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT1**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH38    | 5190               | 42.30                   | 36.60                           |
| CH46    | 5230               | 89.99                   | 44.60                           |

### TX CH38

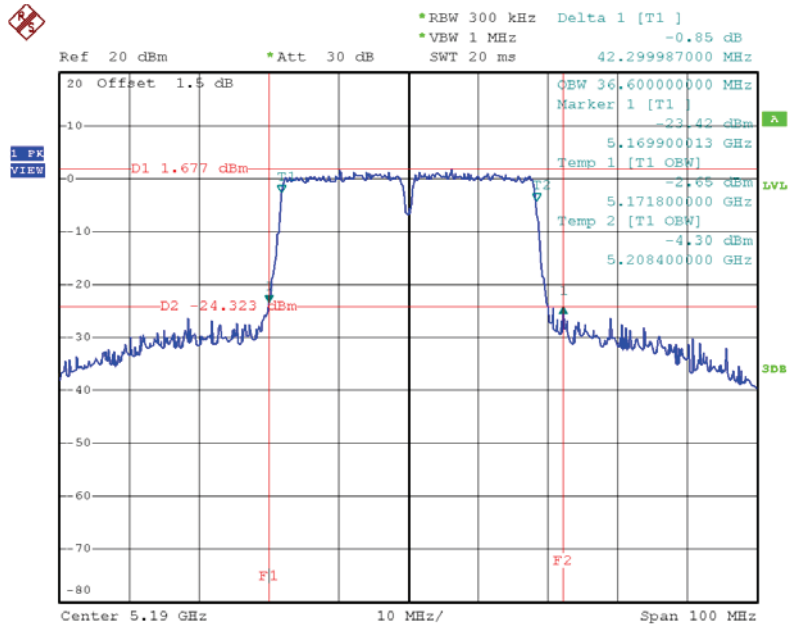

Date: 18.JUN.2016 16:42:48

### TX CH46

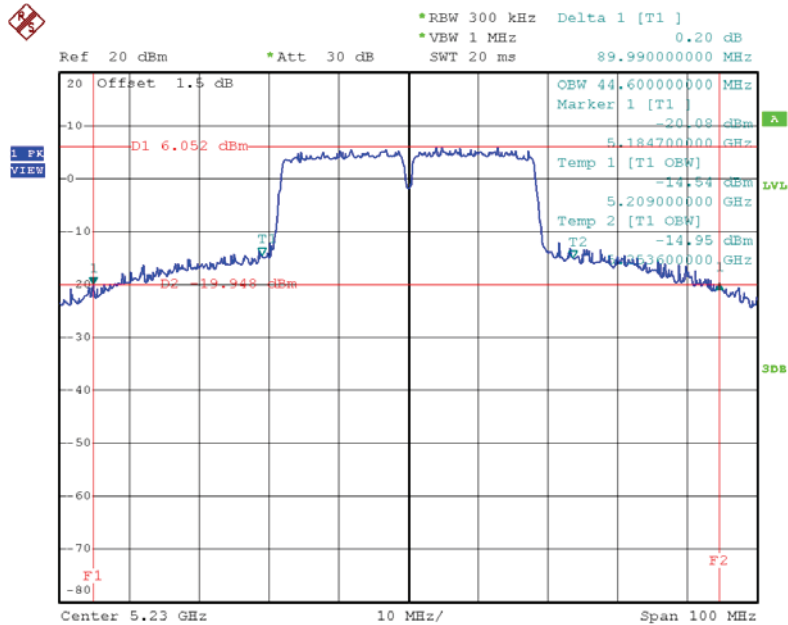


Date: 18.JUN.2016 16:46:52

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT2**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH38    | 5190               | 39.70                   | 36.40                           |
| CH46    | 5230               | 86.00                   | 37.00                           |

### TX CH38

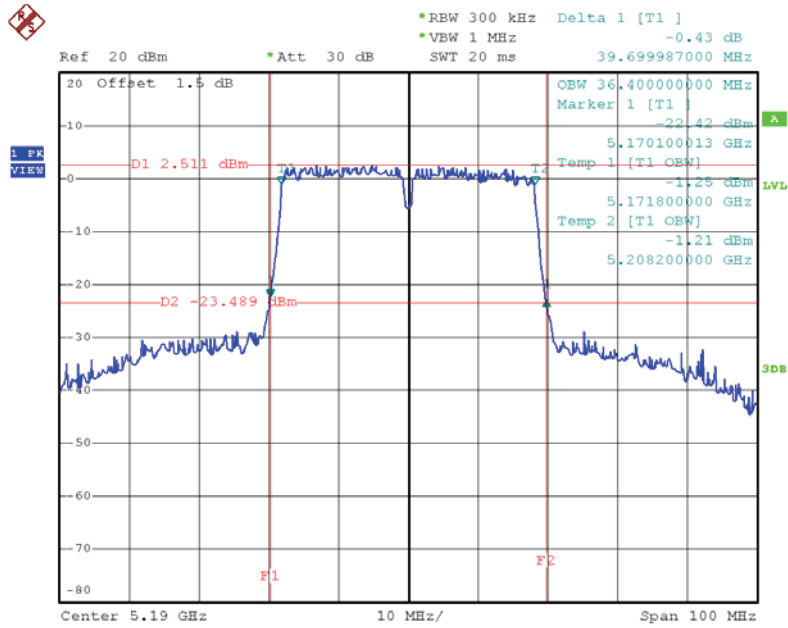

Date: 18.JUN.2016 16:44:06

### TX CH46

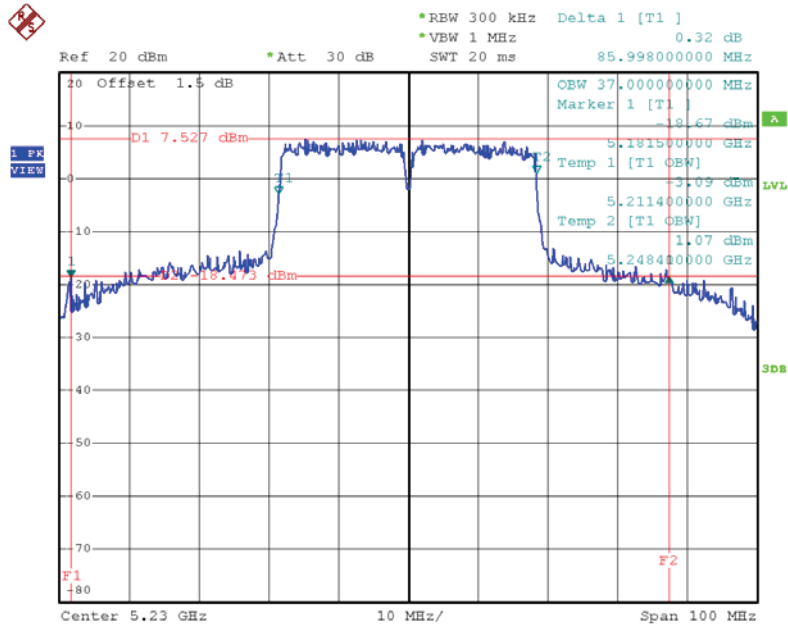


Date: 18.JUN.2016 16:45:50

Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT1

| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH42    | 5210               | 86.20                   | 76.00                           |

TX CH42

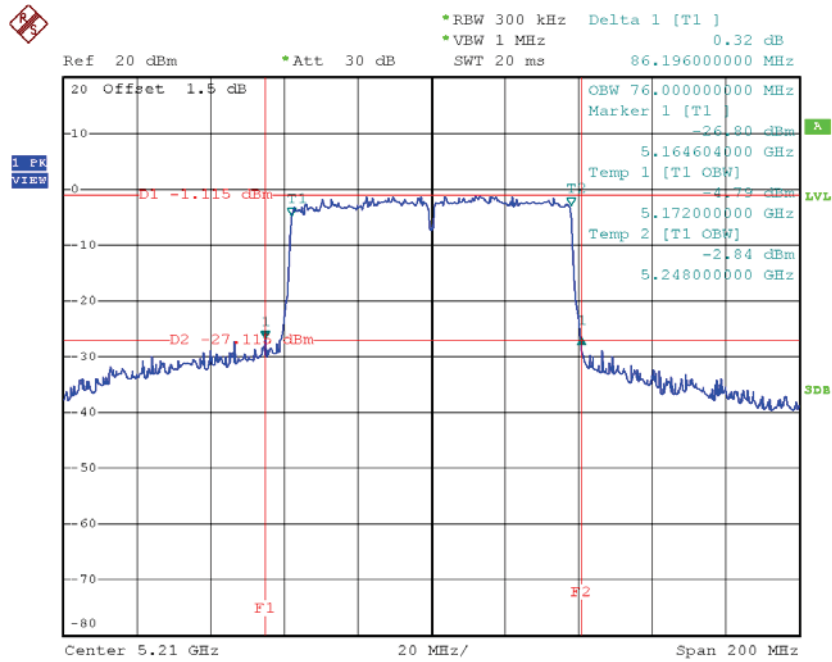


Date: 18.JUN.2016 18:28:43

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT2**

| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH42    | 5210               | 80.60                   | 76.00                           |

**TX CH42**

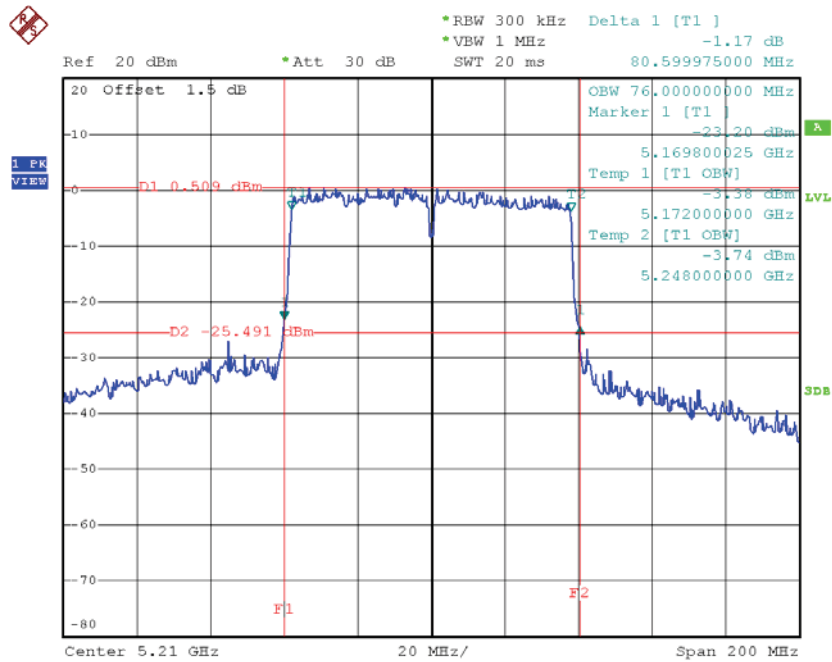


Date: 18.JUN.2016 18:27:50

Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT1


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH52    | 5260            | 33.20                | 18.80                        |
| CH60    | 5300            | 38.55                | 18.70                        |
| CH64    | 5320            | 48.40                | 21.50                        |

TX CH52

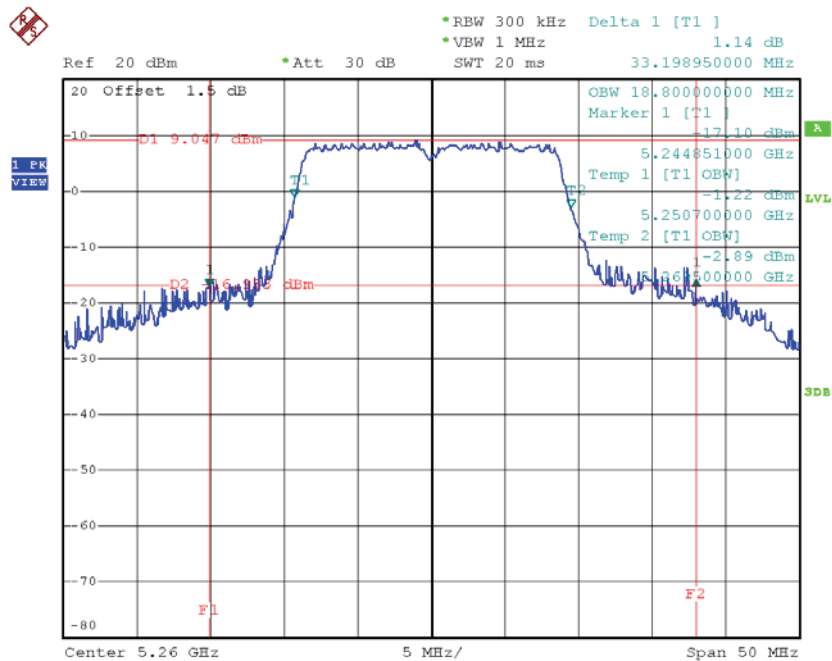


Date: 18.JUN.2016 15:32:47

### TX CH60

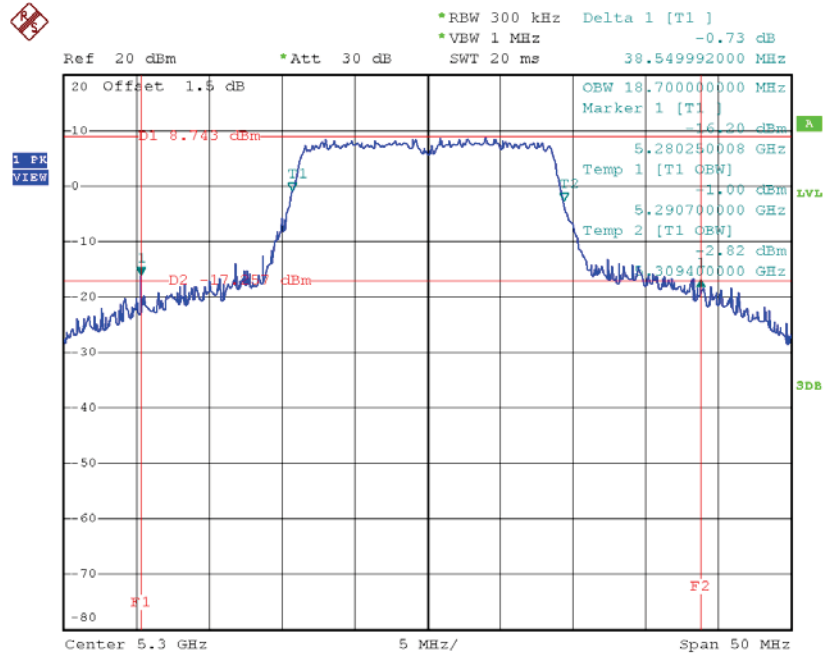

Date: 18.JUN.2016 15:48:30

### TX CH64

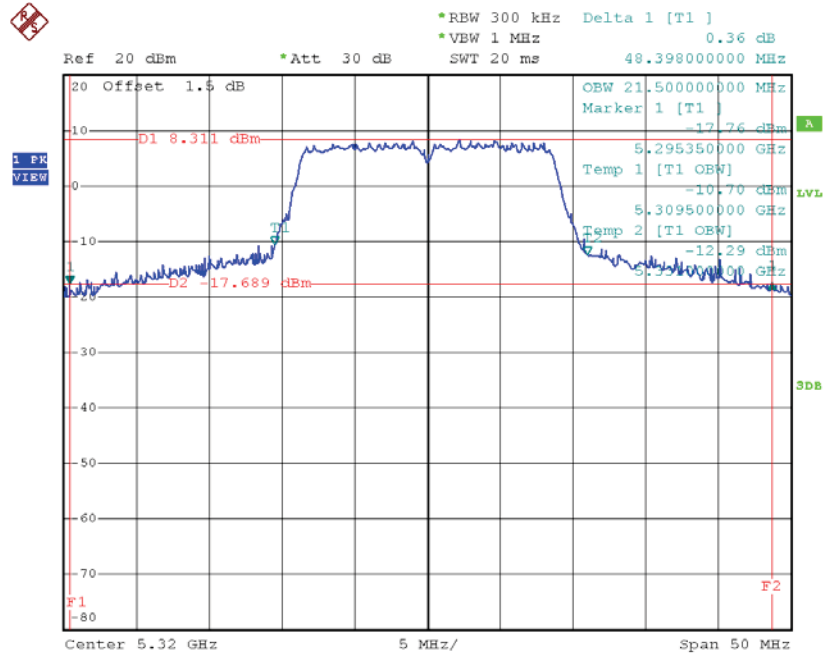


Date: 18.JUN.2016 15:55:48

Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH52    | 5260               | 18.20                   | 27.55                           |
| CH60    | 5300               | 27.50                   | 18.30                           |
| CH64    | 5320               | 23.70                   | 18.30                           |

TX CH52

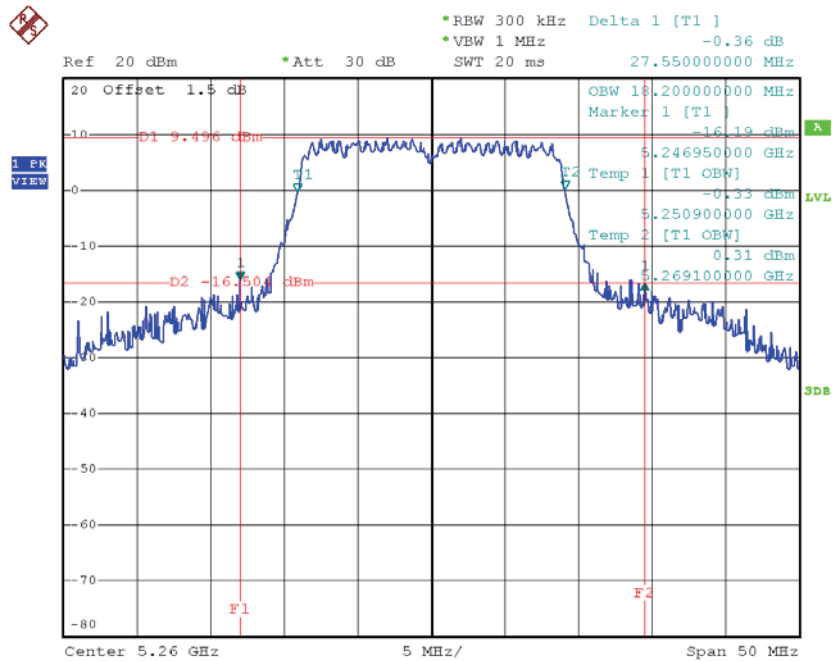


Date: 18.JUN.2016 15:53:29

### TX CH60

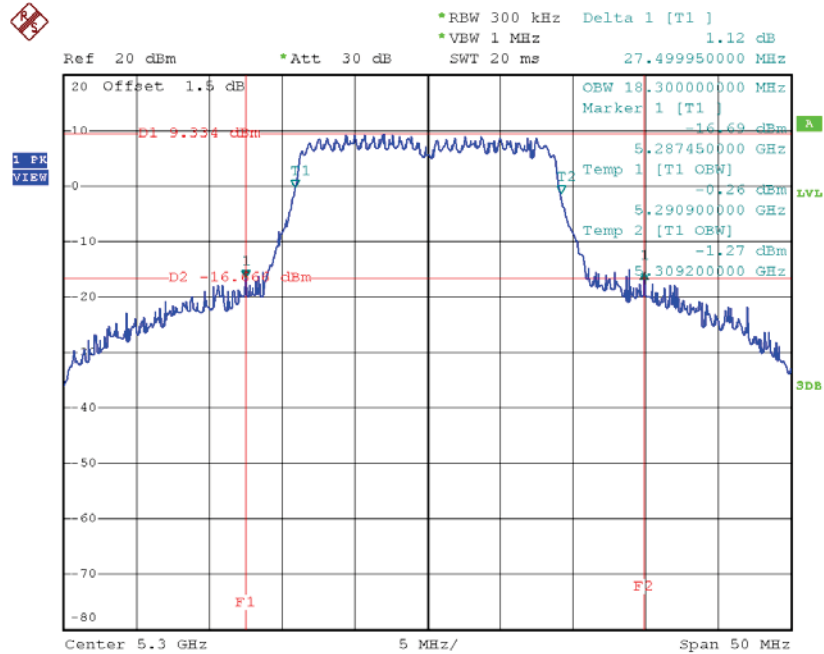

Date: 18.JUN.2016 15:49:25

### TX CH64

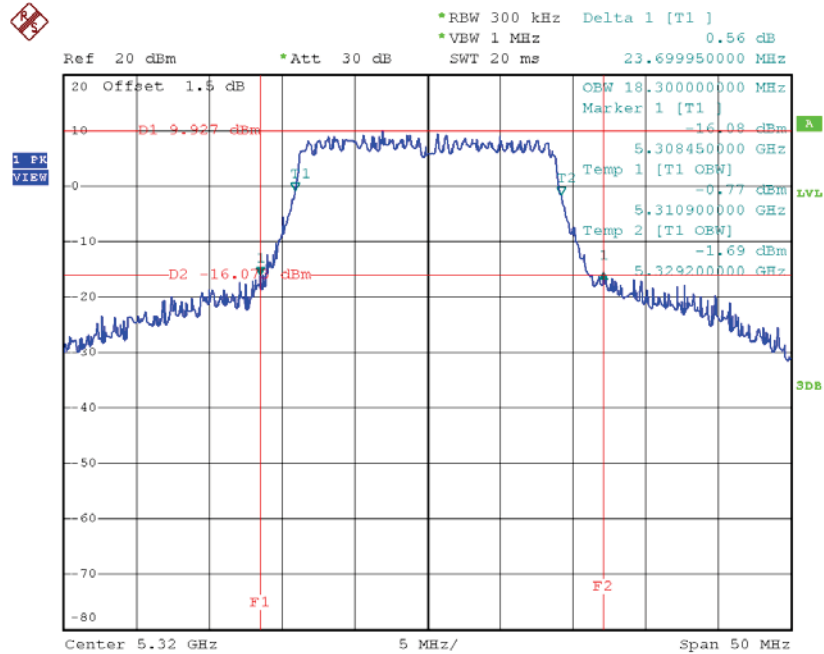


Date: 18.JUN.2016 15:55:05

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT1**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH54    | 5270               | 71.20                   | 36.80                           |
| CH62    | 5310               | 86.30                   | 46.20                           |

### TX CH54

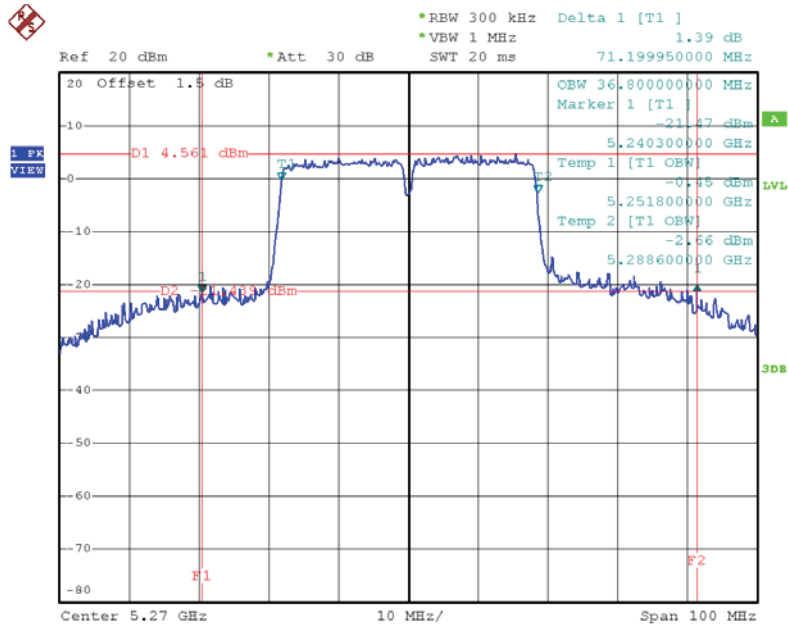

Date: 18.JUN.2016 16:48:28

### TX CH62

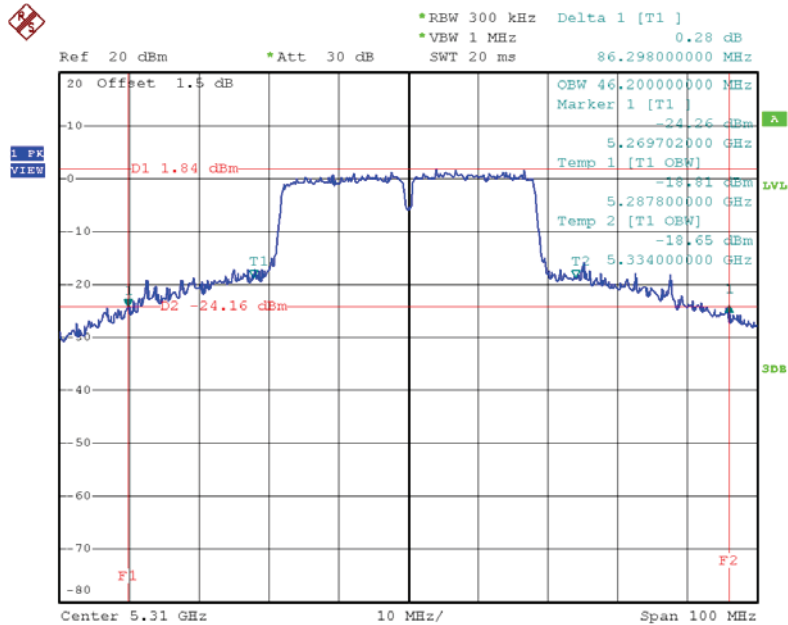


Date: 18.JUN.2016 16:52:02

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT2**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH54    | 5270               | 67.79                   | 36.60                           |
| CH62    | 5310               | 39.70                   | 36.60                           |

### TX CH54

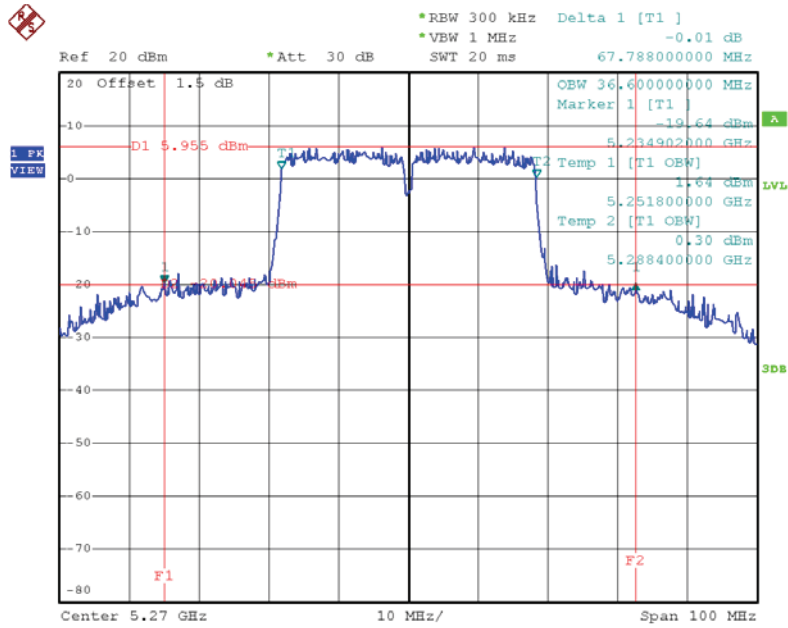

Date: 18.JUN.2016 16:49:28

### TX CH62

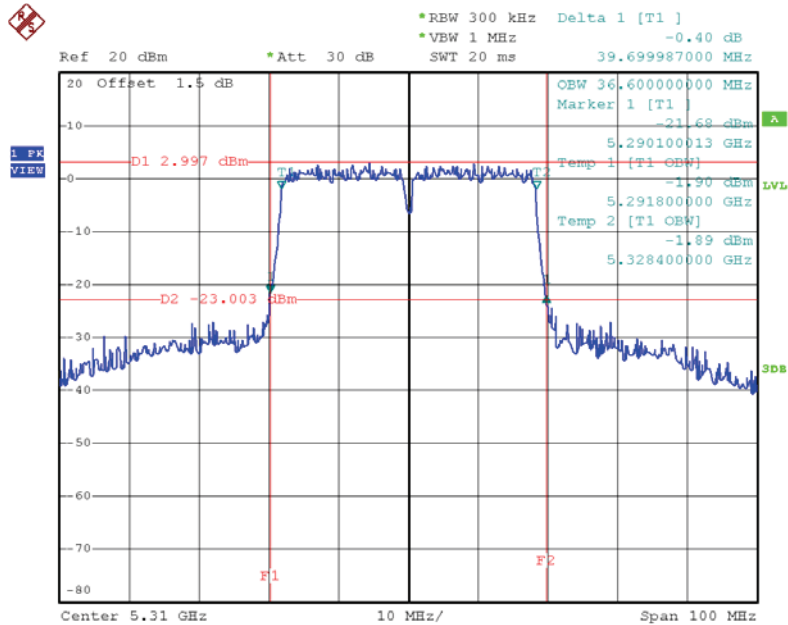


Date: 18.JUN.2016 16:51:16

Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT1

| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH58    | 5290               | 81.20                   | 76.00                           |

TX CH58

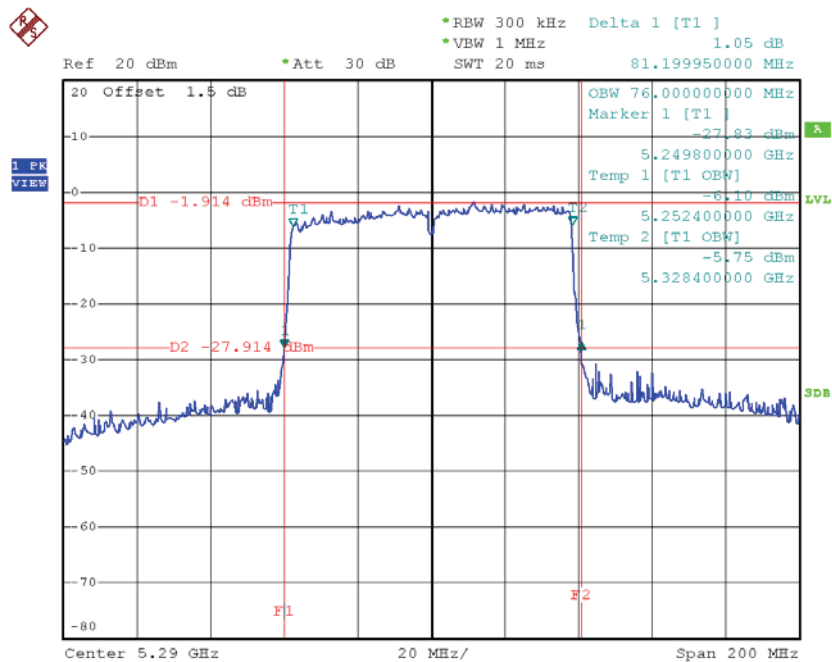


Date: 18.JUN.2016 18:29:32

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT2**

| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH58    | 5290               | 80.60                   | 76.00                           |

**TX CH58**

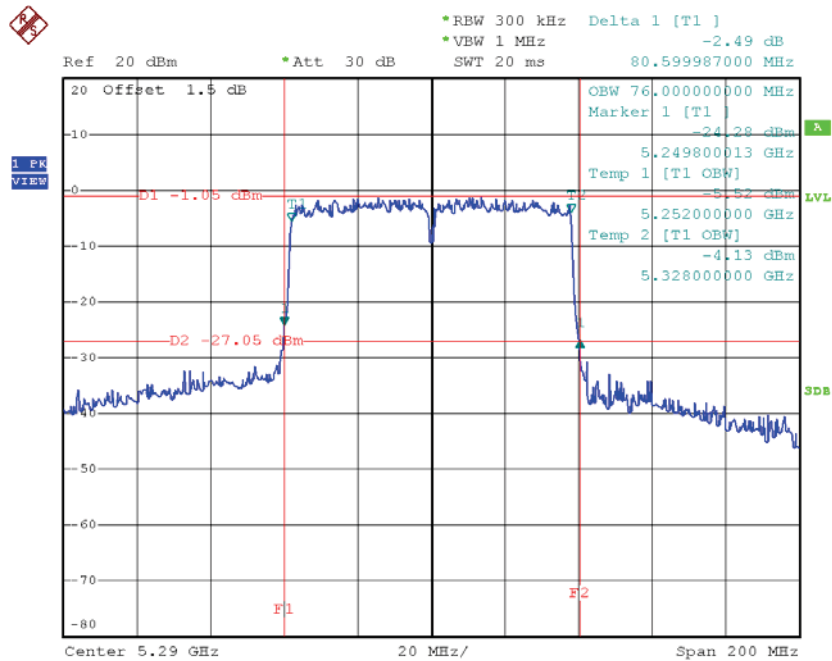


Date: 18.JUN.2016 18:30:20

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_ANT1**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH100   | 5500               | 30.20                   | 18.60                           |
| CH116   | 5580               | 34.39                   | 18.60                           |
| CH140   | 5700               | 27.69                   | 18.50                           |

**TX CH100**

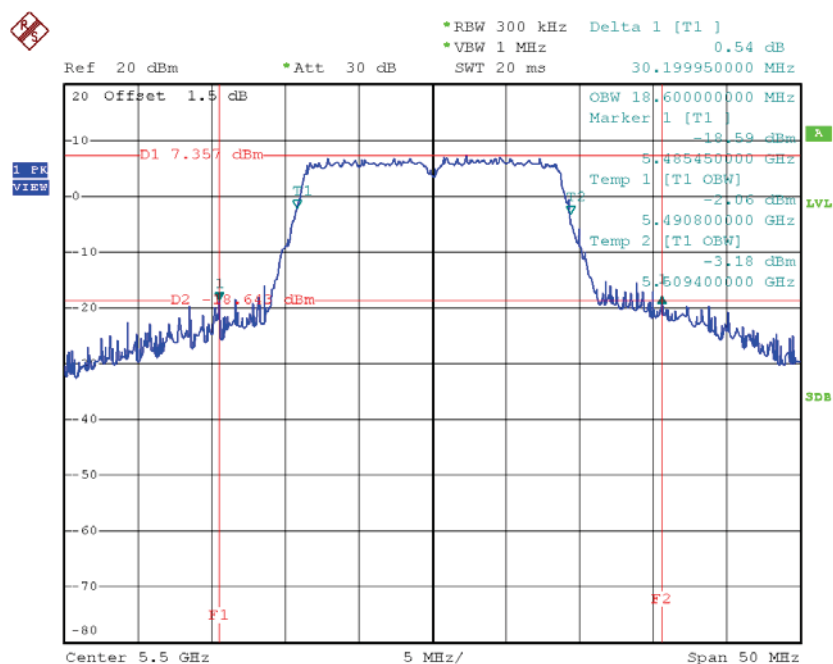


Date: 18.JUN.2016 15:57:15

### TX CH116

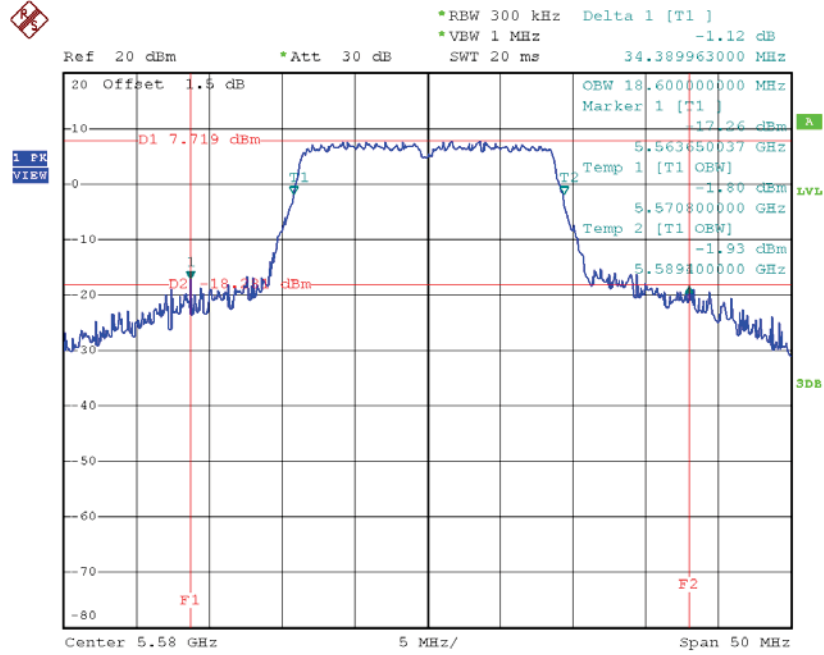

Date: 18.JUN.2016 16:08:26

### TX CH140

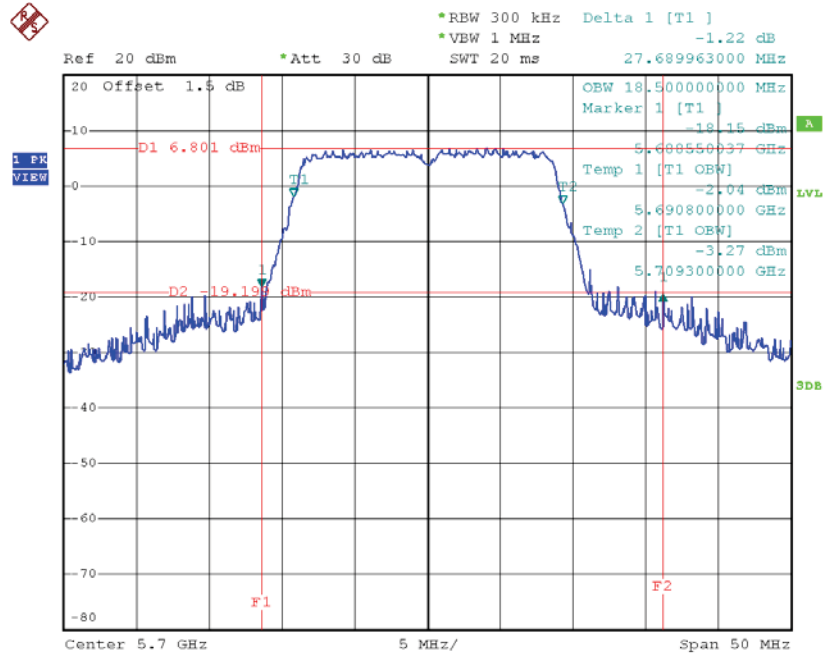


Date: 18.JUN.2016 16:19:36

Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_ANT2


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH100   | 5500            | 26.19                | 18.30                        |
| CH116   | 5580            | 25.90                | 18.20                        |
| CH140   | 5700            | 26.85                | 18.50                        |

TX CH100

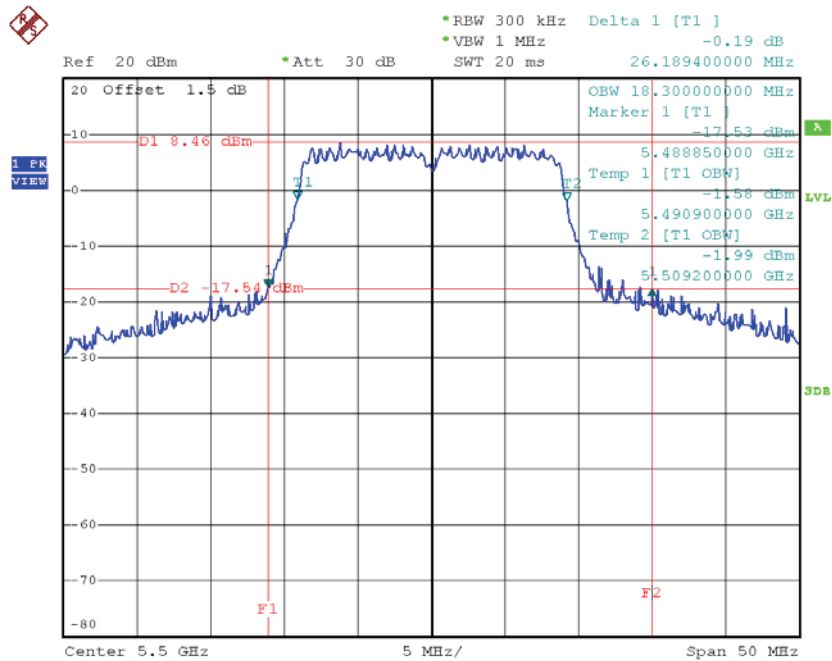


Date: 18.JUN.2016 15:59:26

### TX CH116

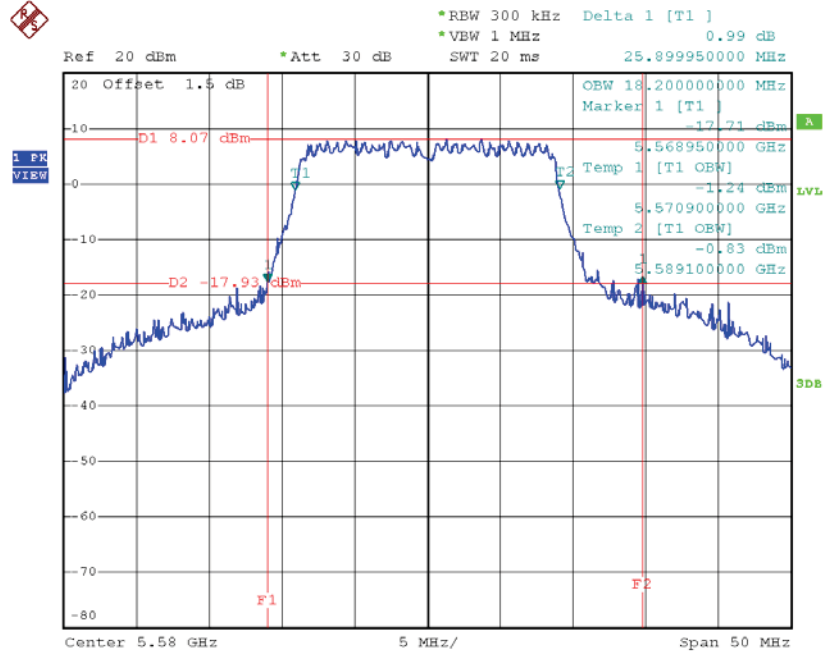

Date: 18.JUN.2016 16:10:32

### TX CH140

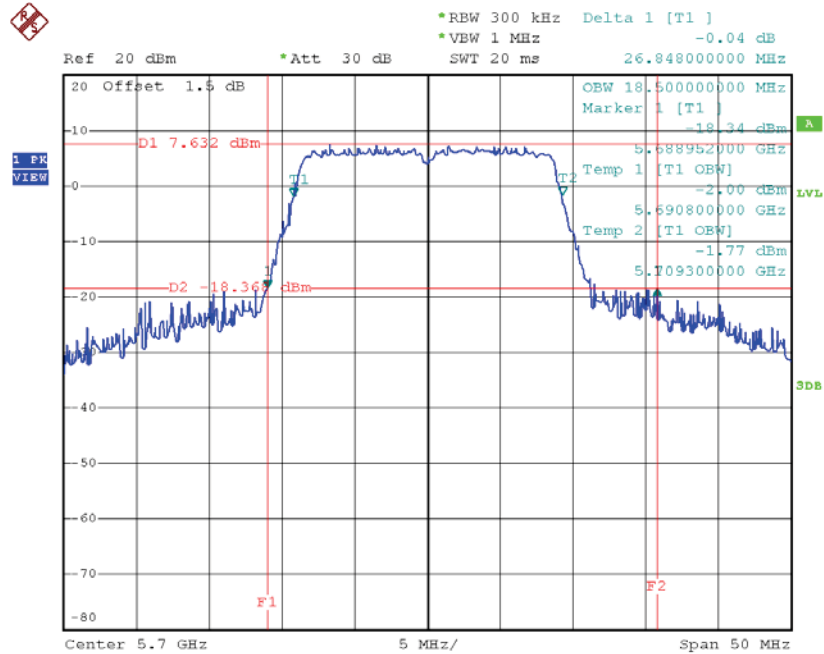


Date: 18.JUN.2016 16:18:19

Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134\_ANT1


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH102   | 5510               | 40.20                   | 36.40                           |
| CH110   | 5550               | 65.00                   | 36.60                           |
| CH134   | 5670               | 80.19                   | 37.40                           |

TX CH102

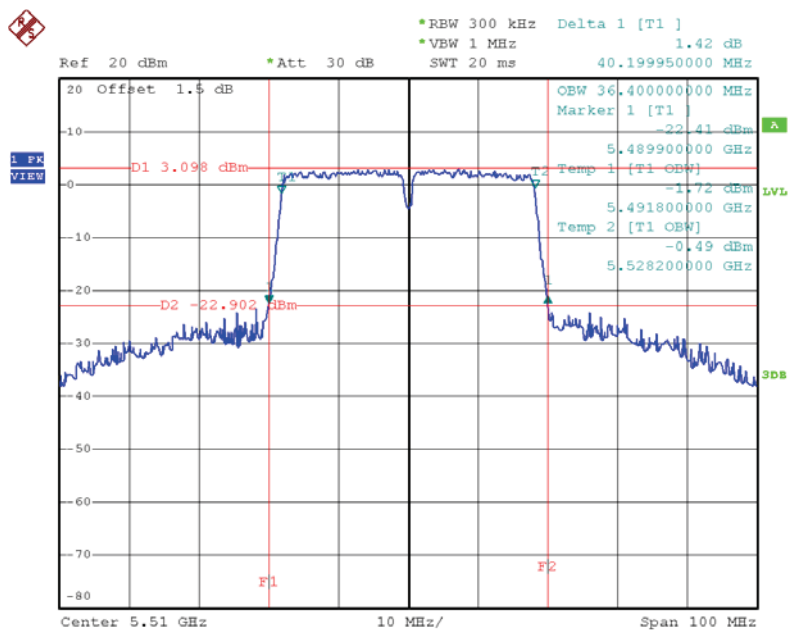


Date: 18.JUN.2016 16:53:52

### TX CH110

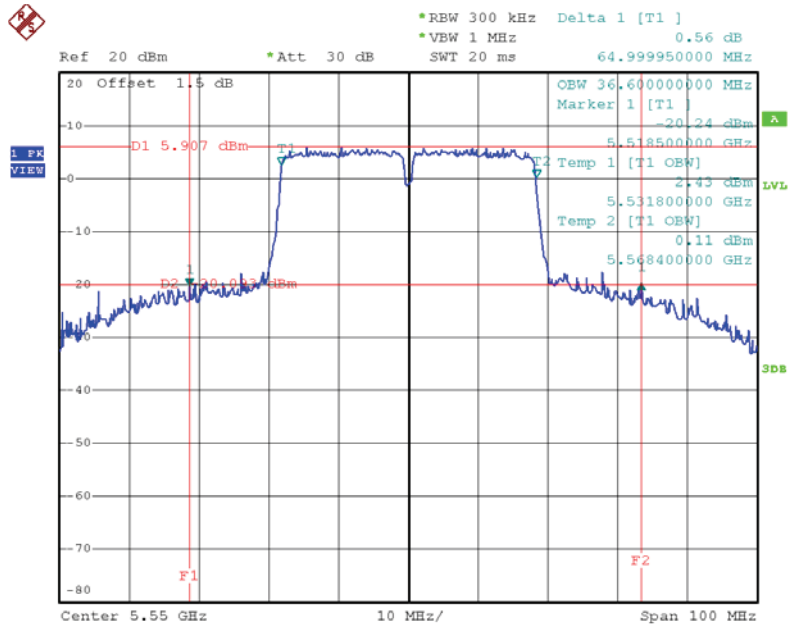

Date: 18.JUN.2016 17:02:07

### TX CH134

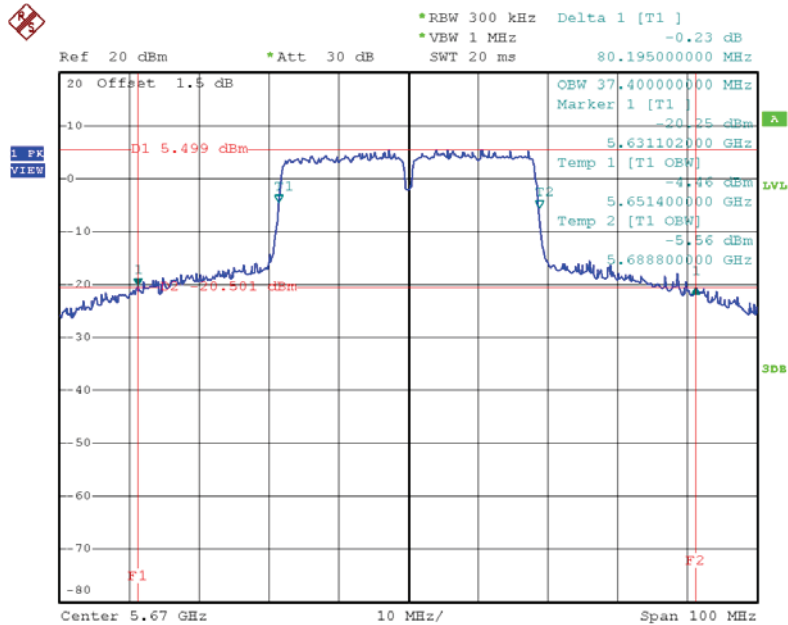


Date: 18.JUN.2016 17:05:41

Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134\_ANT2


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH102   | 5510               | 39.90                   | 36.20                           |
| CH110   | 5550               | 39.81                   | 36.60                           |
| CH134   | 5670               | 39.79                   | 36.40                           |

TX CH102

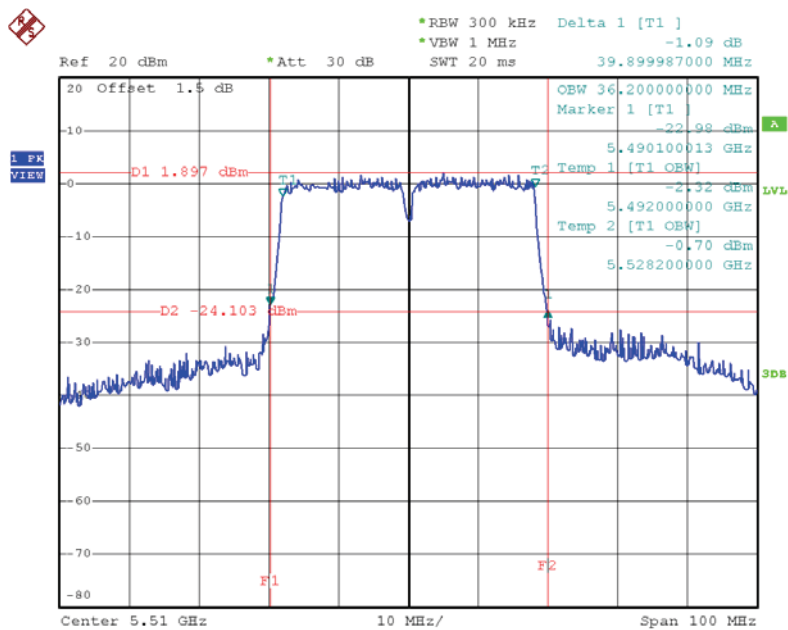


Date: 18.JUN.2016 16:57:15

# TX CH110

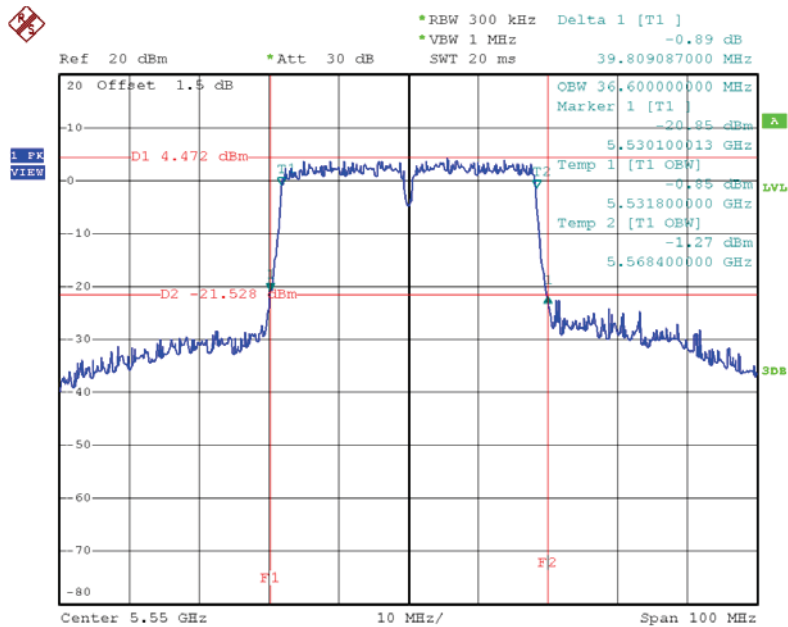

Date: 18.JUN.2016 17:00:59

# TX CH134

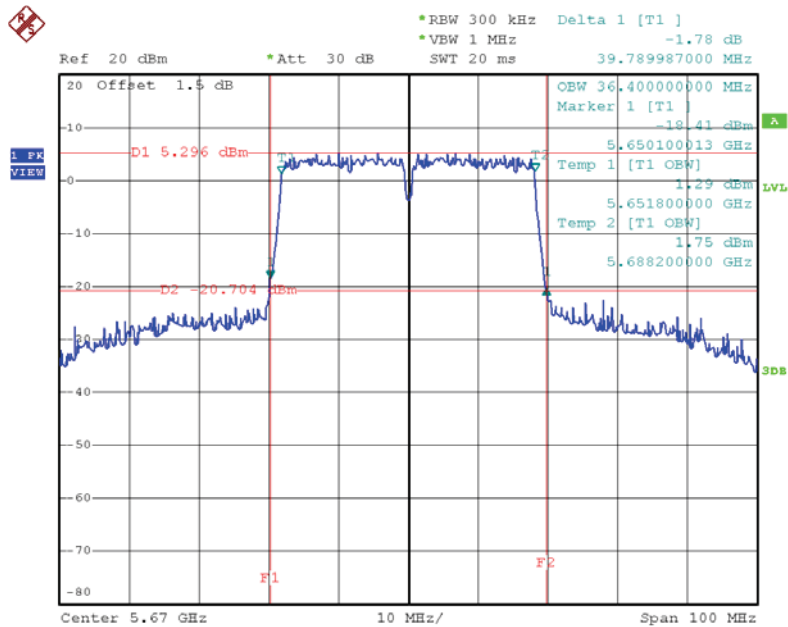


Date: 18.JUN.2016 17:04:52

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122\_ANT1**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH106   | 5530               | 82.00                   | 76.00                           |
| CH122   | 5610               | 120.40                  | 76.00                           |

### TX CH106

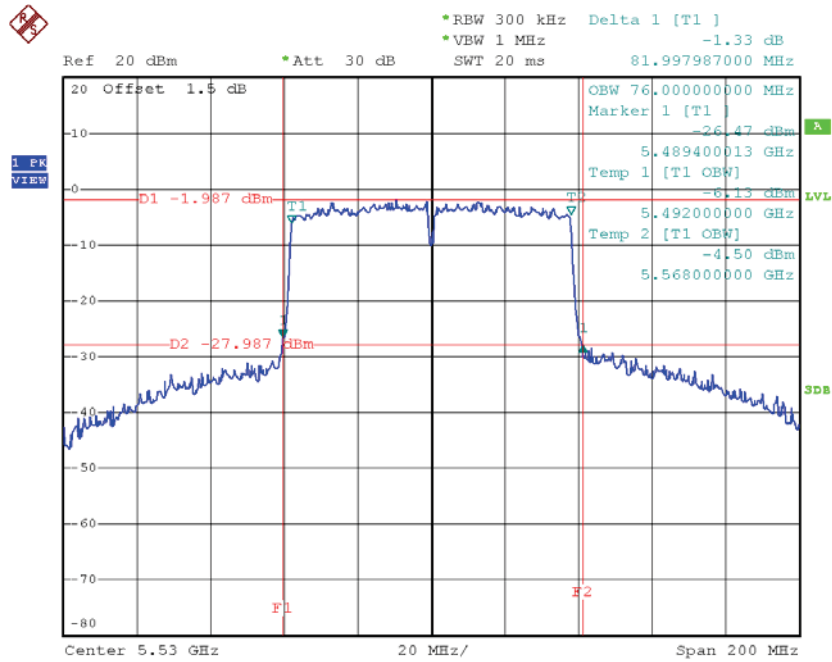

Date: 18.JUN.2016 18:32:00

### TX CH122

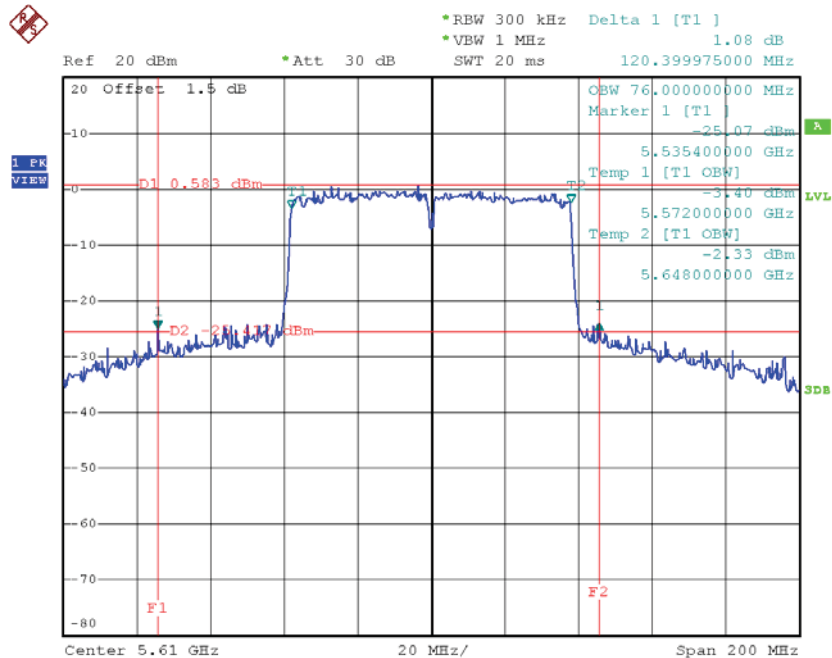


Date: 18.JUN.2016 18:32:51

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122\_ANT2**


| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH106   | 5530               | 80.20                   | 75.60                           |
| CH122   | 5610               | 108.40                  | 76.00                           |

### TX CH106

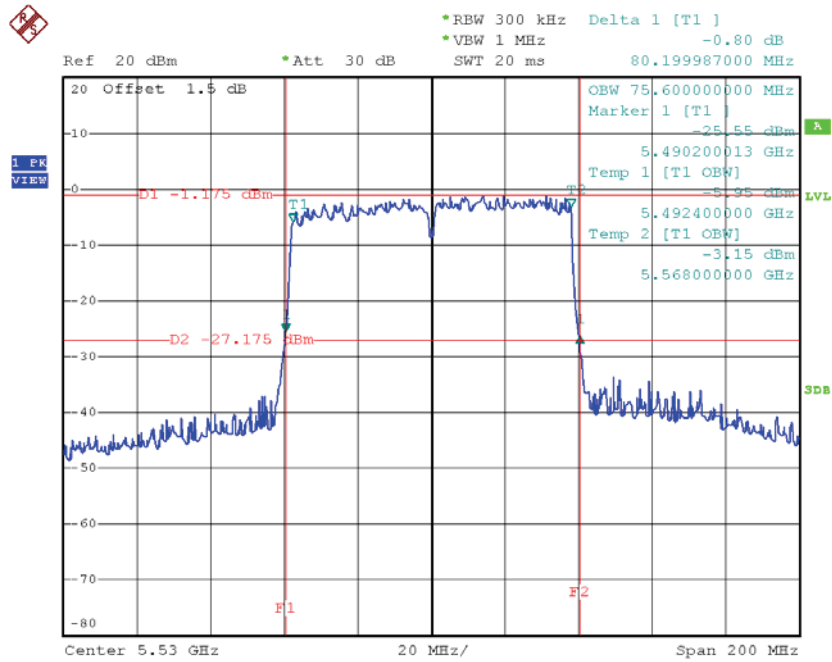

Date: 18.JUN.2016 18:31:11

### TX CH122

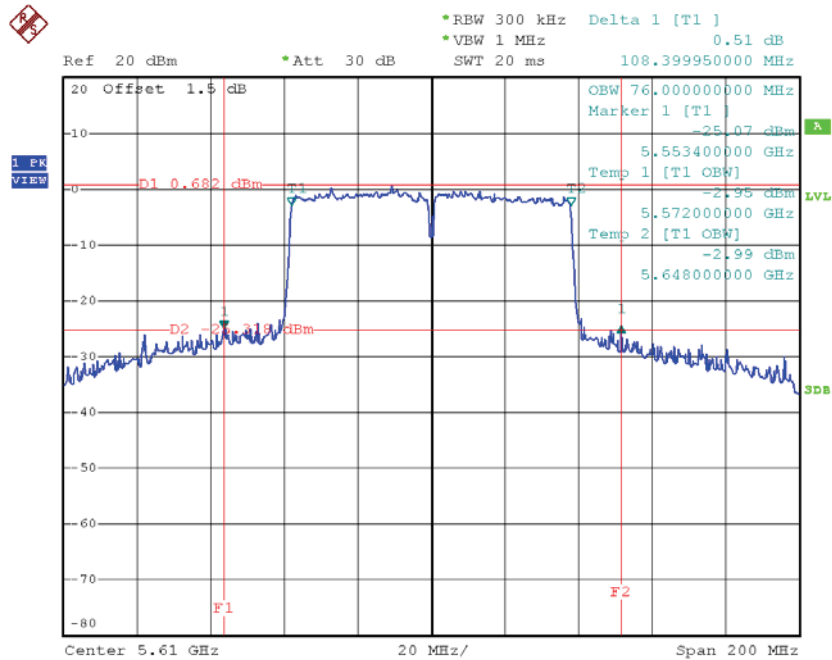


Date: 18.JUN.2016 18:34:47

Test Mode: UNII-3/ TX AC20 Mode\_CH149/CH157/CH165\_ANT1


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH149   | 5745               | 17.59                  | 34.90                           | >=500          |
| CH157   | 5785               | 17.61                  | 34.80                           | >=500          |
| CH165   | 5825               | 17.50                  | 35.20                           | >=500          |

TX CH 149

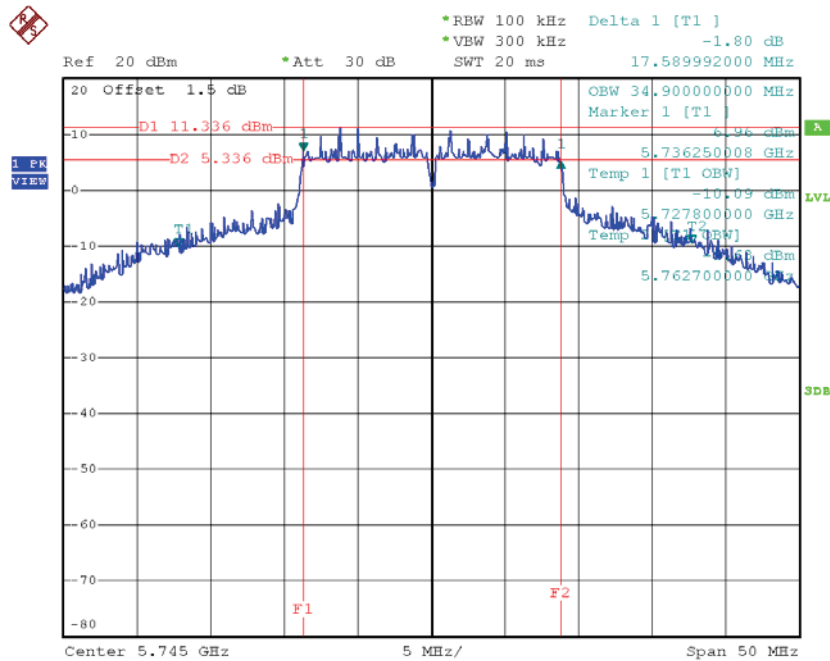


Date: 18.JUN.2016 16:25:03

### TX CH 157

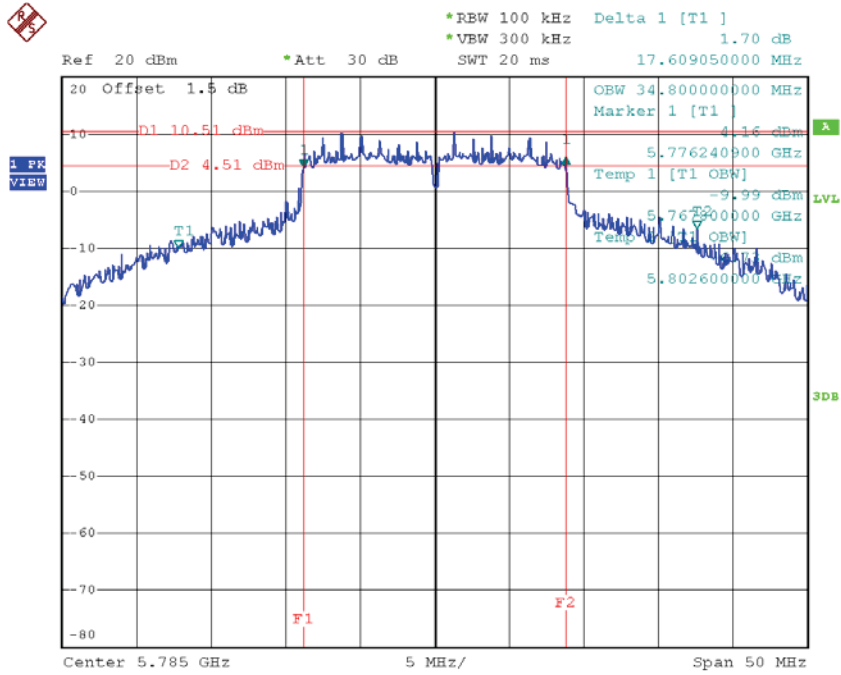

Date: 18.JUN.2016 16:26:31

### TX CH 165

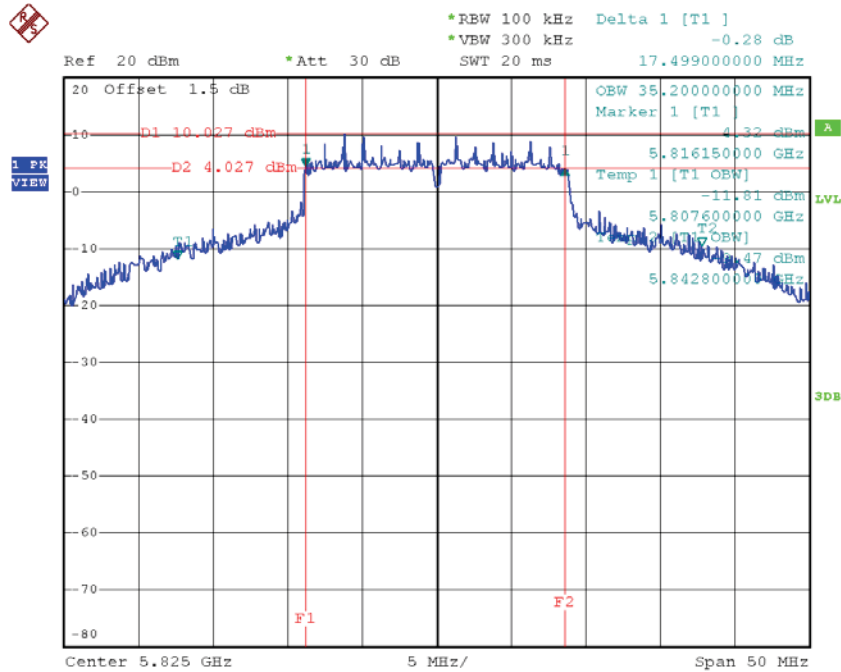


Date: 18.JUN.2016 16:34:12

**Test Mode: UNII-3/ TX AC20 Mode\_CH149/CH157/CH165\_ANT2**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH149   | 5745               | 17.59                  | 30.20                           | >=500          |
| CH157   | 5785               | 17.55                  | 32.00                           | >=500          |
| CH165   | 5825               | 17.65                  | 31.30                           | >=500          |

**TX CH 149**

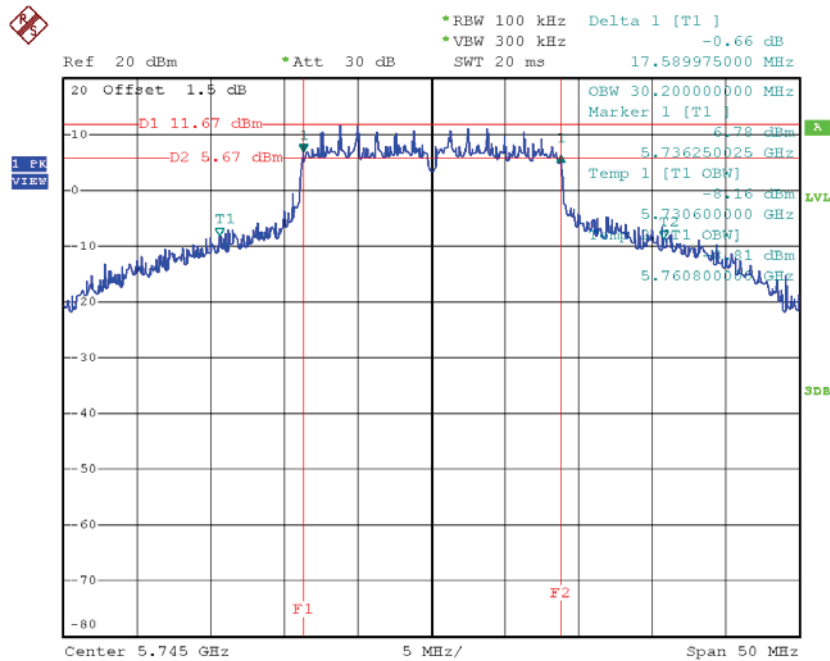


Date: 18.JUN.2016 16:23:52

### TX CH 157

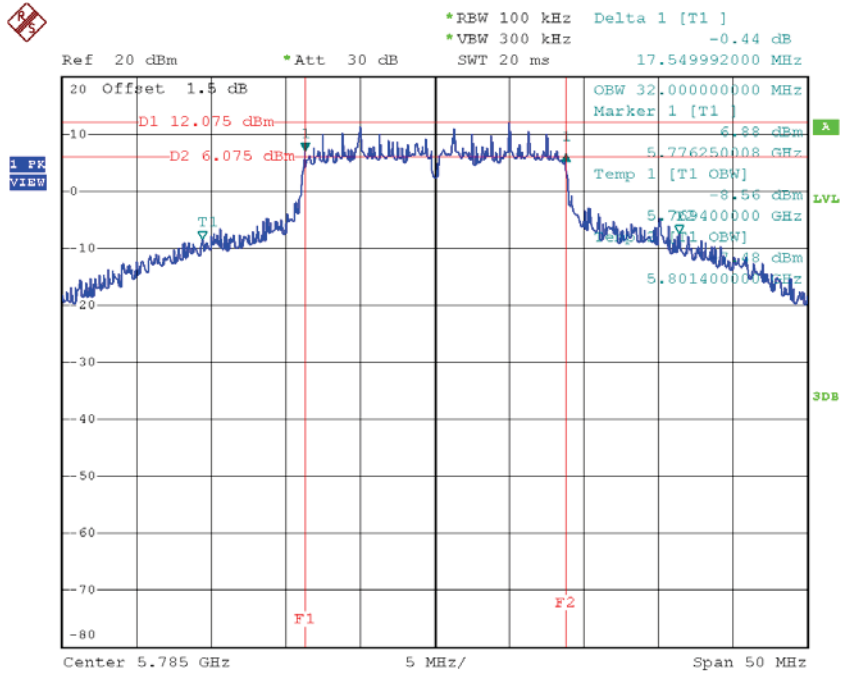

Date: 18.JUN.2016 16:28:33

### TX CH 165

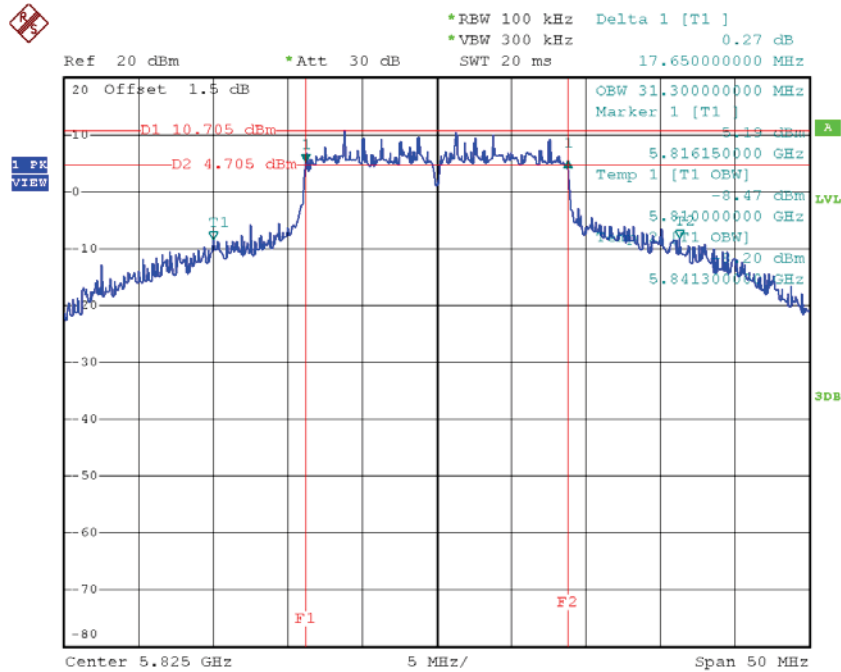


Date: 18.JUN.2016 16:31:10

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159\_ANT1**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151   | 5755               | 36.50                  | 70.20                           | $\geq 500$     |
| CH159   | 5795               | 36.60                  | 73.00                           | $\geq 500$     |

### TX CH 151

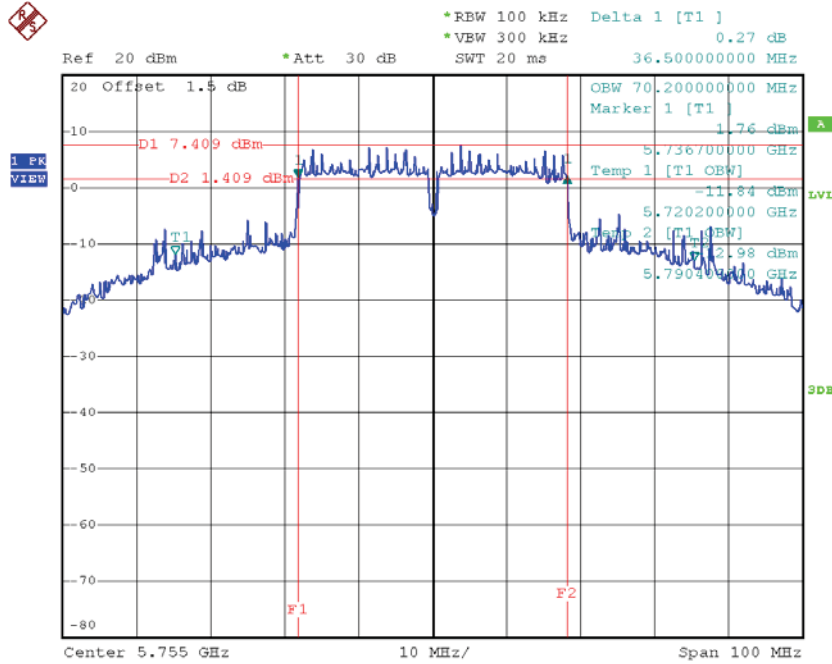

Date: 18.JUN.2016 17:07:08

### TX CH 159

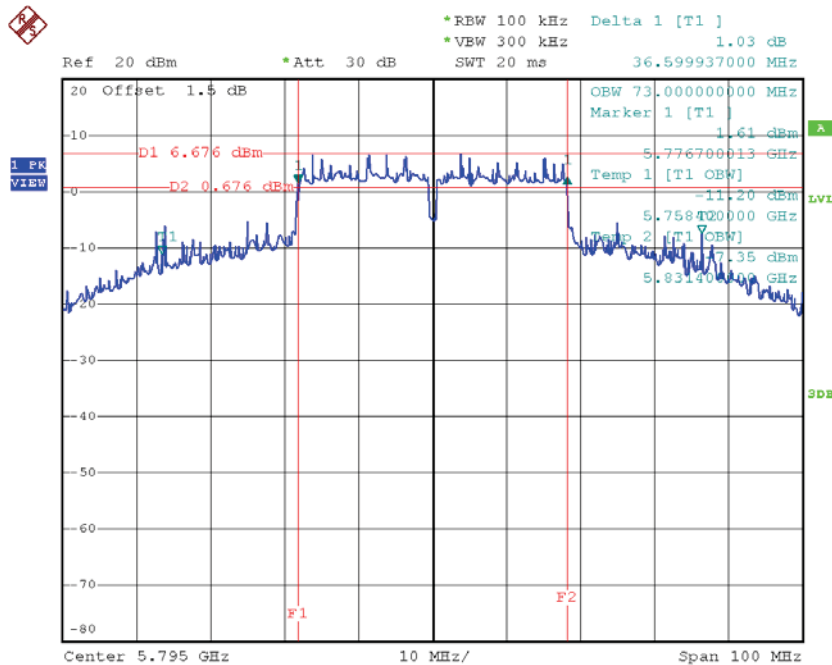


Date: 18.JUN.2016 17:12:12

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159\_ANT2**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151   | 5755               | 36.50                  | 66.00                           | >=500          |
| CH159   | 5795               | 36.50                  | 66.80                           | >=500          |

### TX CH 151

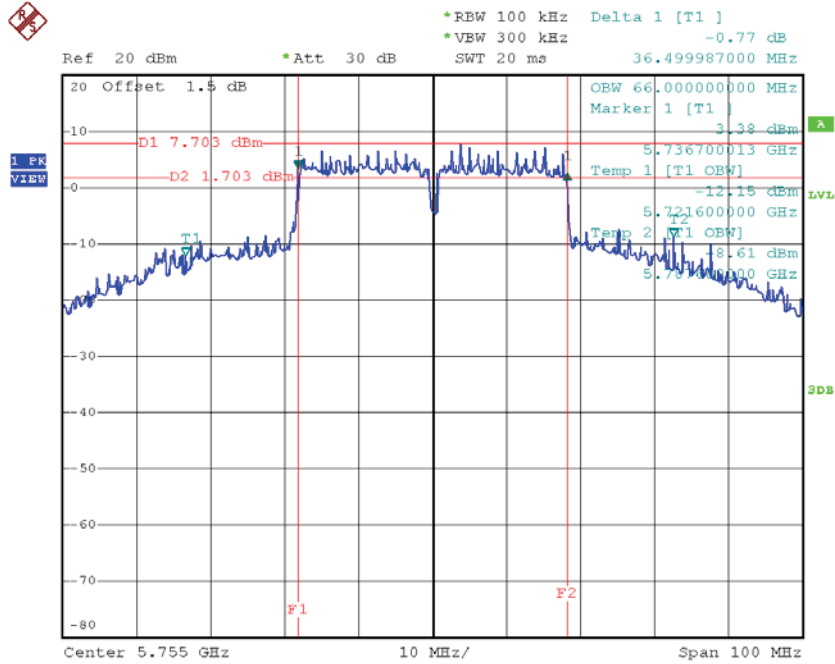

Date: 18.JUN.2016 17:08:16

### TX CH 159

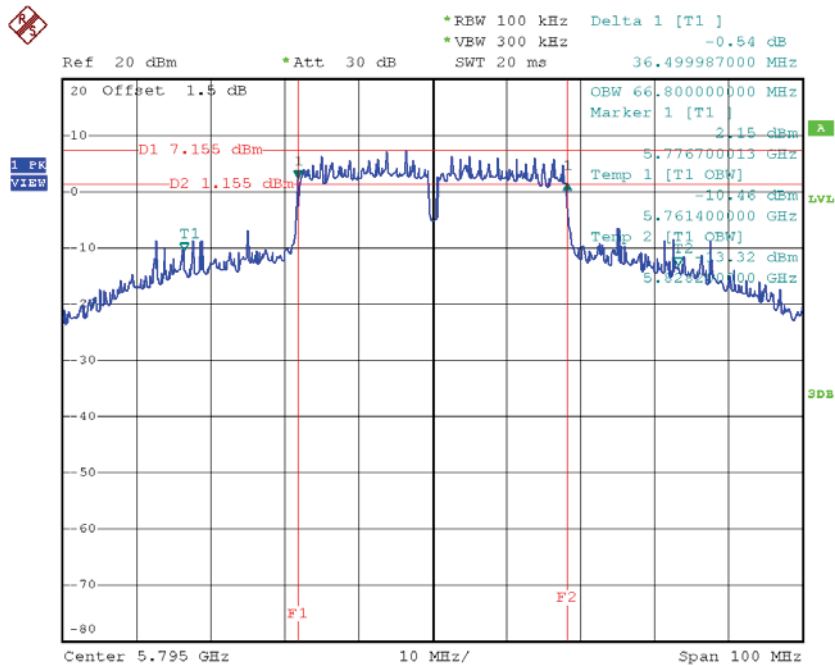


Date: 18.JUN.2016 17:09:53

**Test Mode: UNII-3/ TX AC80 Mode\_CH155\_ANT1**

| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH155   | 5775               | 75.59                  | 116.00                          | >=500          |

**TX CH 155**

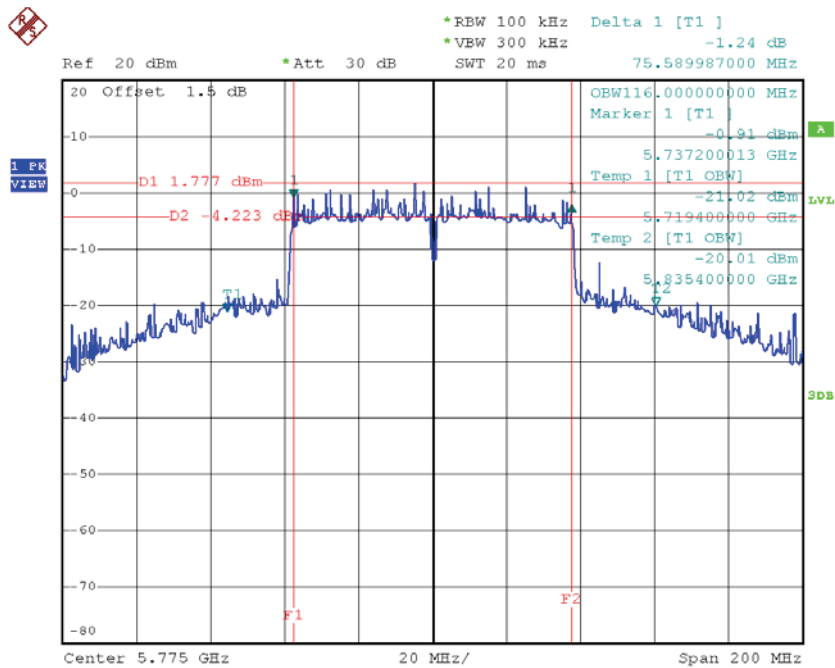


Date: 18.JUN.2016 18:36:30

Test Mode: UNII-3/ TX AC80 Mode\_CH155\_ANT2

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH155   | 5775            | 75.60               | 114.80                       | >=500       |

TX CH 155

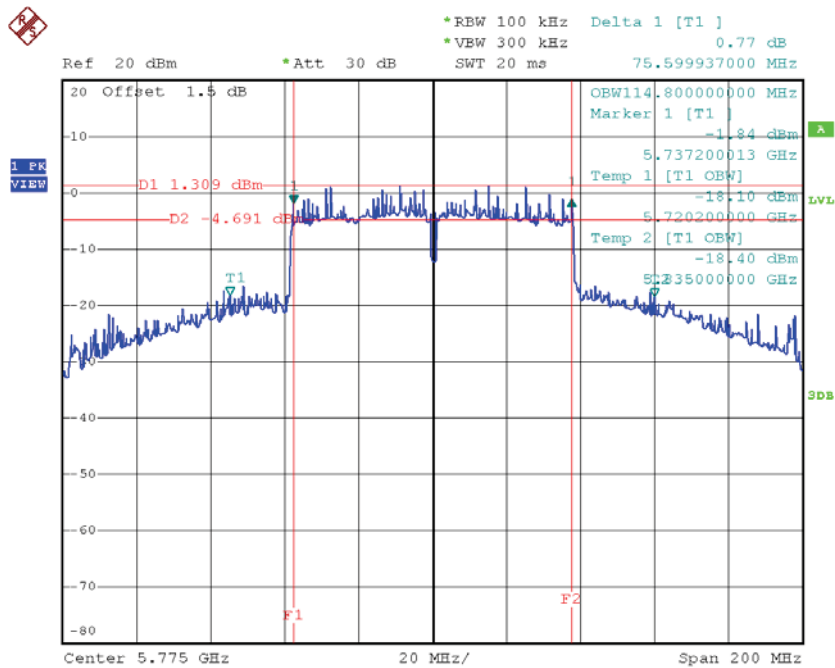

Date: 18.JUN.2016 18:35:39

## ATTACHMENT F - MAXIMUM OUTPUT POWER

**Test Mode: UNII-1/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 20.70              | 0.35        | 21.05                            | 24.00       | 0.25         |
| CH40    | 5200            | 21.87              | 0.35        | 22.22                            | 24.00       | 0.25         |
| CH48    | 5240            | 21.78              | 0.35        | 22.13                            | 24.00       | 0.25         |

**Test Mode: UNII-1/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 19.72              | 0.35        | 20.07                            | 24.00       | 0.25         |
| CH40    | 5200            | 21.61              | 0.35        | 21.96                            | 24.00       | 0.25         |
| CH48    | 5240            | 21.21              | 0.35        | 21.56                            | 24.00       | 0.25         |

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 18.06              | 0.71        | 18.77                            | 22.50       | 0.18         |
| CH40    | 5200            | 18.14              | 0.71        | 18.85                            | 22.50       | 0.18         |
| CH48    | 5240            | 18.01              | 0.71        | 18.72                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 17.12              | 0.71        | 17.83                            | 22.50       | 0.18         |
| CH40    | 5200            | 17.13              | 0.71        | 17.84                            | 22.50       | 0.18         |
| CH48    | 5240            | 17.23              | 0.71        | 17.94                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 21.34              | 22.50       | 0.18         |
| CH40    | 5200            | 21.38              | 22.50       | 0.18         |
| CH48    | 5240            | 21.36              | 22.50       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 13.79              | 1.86        | 15.65                            | 22.50       | 0.18         |
| CH46    | 5230            | 17.54              | 1.86        | 19.40                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 13.08              | 1.86        | 14.94                            | 22.50       | 0.18         |
| CH46    | 5230            | 16.63              | 1.86        | 18.49                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 18.32              | 22.50       | 0.18         |
| CH46    | 5230            | 21.98              | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 20.14              | 0.35        | 20.49                            | 24.00       | 0.25         |
| CH60    | 5300            | 19.84              | 0.35        | 20.19                            | 24.00       | 0.25         |
| CH64    | 5320            | 18.93              | 0.35        | 19.28                            | 24.00       | 0.25         |

**Test Mode: UNII-2A/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 20.34              | 0.35        | 20.69                            | 24.00       | 0.25         |
| CH60    | 5300            | 20.26              | 0.35        | 20.61                            | 24.00       | 0.25         |
| CH64    | 5320            | 19.28              | 0.35        | 19.63                            | 24.00       | 0.25         |

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 17.84              | 0.71        | 18.55                            | 22.50       | 0.18         |
| CH60    | 5300            | 17.78              | 0.71        | 18.49                            | 22.50       | 0.18         |
| CH64    | 5320            | 17.95              | 0.71        | 18.66                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 17.64              | 0.71        | 18.35                            | 22.50       | 0.18         |
| CH60    | 5300            | 17.56              | 0.71        | 18.27                            | 22.50       | 0.18         |
| CH64    | 5320            | 17.35              | 0.71        | 18.06                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 21.46              | 22.50       | 0.18         |
| CH60    | 5300            | 21.39              | 22.50       | 0.18         |
| CH64    | 5320            | 21.38              | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 16.64              | 1.86        | 18.50                            | 22.50       | 0.18         |
| CH62    | 5310            | 13.49              | 1.86        | 15.35                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 16.43              | 1.86        | 18.29                            | 22.50       | 0.18         |
| CH62    | 5310            | 13.92              | 1.86        | 15.78                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 21.41              | 22.50       | 0.18         |
| CH62    | 5310            | 18.58              | 22.50       | 0.18         |

**Test Mode: UNII-2C/TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 18.74              | 0.35        | 19.09                            | 24.00       | 0.25         |
| CH116   | 5580            | 21.45              | 0.35        | 21.80                            | 24.00       | 0.25         |
| CH140   | 5700            | 17.02              | 0.35        | 17.37                            | 24.00       | 0.25         |

**Test Mode: UNII-2C/TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 17.62              | 0.35        | 17.97                            | 24.00       | 0.25         |
| CH116   | 5580            | 20.07              | 0.35        | 20.42                            | 24.00       | 0.25         |
| CH140   | 5700            | 17.18              | 0.35        | 17.53                            | 24.00       | 0.25         |

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 16.03              | 0.71        | 16.74                            | 21.02       | 0.13         |
| CH116   | 5580            | 16.23              | 0.71        | 16.94                            | 21.02       | 0.13         |
| CH140   | 5700            | 14.14              | 0.71        | 14.85                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.92              | 0.71        | 16.63                            | 21.02       | 0.13         |
| CH116   | 5580            | 15.76              | 0.71        | 16.47                            | 21.02       | 0.13         |
| CH140   | 5700            | 14.52              | 0.71        | 15.23                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 19.70              | 21.02       | 0.13         |
| CH116   | 5580            | 19.72              | 21.02       | 0.13         |
| CH140   | 5700            | 18.05              | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 13.37              | 1.86        | 15.23                            | 21.02       | 0.13         |
| CH110   | 5550            | 14.01              | 1.86        | 15.87                            | 21.02       | 0.13         |
| CH134   | 5670            | 13.64              | 1.86        | 15.50                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 12.76              | 1.86        | 14.62                            | 21.02       | 0.13         |
| CH110   | 5550            | 15.64              | 1.86        | 17.50                            | 21.02       | 0.13         |
| CH134   | 5670            | 15.09              | 1.86        | 16.95                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 17.95              | 21.02       | 0.13         |
| CH110   | 5550            | 19.77              | 21.02       | 0.13         |
| CH134   | 5670            | 19.30              | 21.02       | 0.13         |

**Test Mode: UNII-3/ TX A Mode\_ANT1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 22.87              | 0.35        | 23.22                            | 30.00       | 1.00         |
| CH157   | 5785            | 22.48              | 0.35        | 22.83                            | 30.00       | 1.00         |
| CH165   | 5825            | 21.81              | 0.35        | 22.16                            | 30.00       | 1.00         |

**Test Mode: UNII-3/ TX A Mode\_ANT2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 23.18              | 0.35        | 23.53                            | 30.00       | 1.00         |
| CH157   | 5785            | 22.94              | 0.35        | 23.29                            | 30.00       | 1.00         |
| CH165   | 5825            | 22.74              | 0.35        | 23.09                            | 30.00       | 1.00         |

**Test Mode: UNII-3/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 21.92              | 0.71        | 22.63                            | 26.97       | 0.50         |
| CH157   | 5785            | 21.97              | 0.71        | 22.68                            | 26.97       | 0.50         |
| CH165   | 5825            | 21.43              | 0.71        | 22.14                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 22.59              | 0.71        | 23.30                            | 26.97       | 0.50         |
| CH157   | 5785            | 22.32              | 0.71        | 23.03                            | 26.97       | 0.50         |
| CH165   | 5825            | 22.12              | 0.71        | 22.83                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 25.99              | 26.97       | 0.50         |
| CH157   | 5785            | 25.87              | 26.97       | 0.50         |
| CH165   | 5825            | 25.51              | 26.97       | 0.50         |

**Test Mode: UNII-3/ TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 20.03              | 1.86        | 21.89                            | 26.97       | 0.50         |
| CH159   | 5795            | 19.95              | 1.86        | 21.81                            | 26.97       | 0.50         |

**Test Mode: UNII-3/ TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 21.70              | 1.86        | 23.56                            | 26.97       | 0.50         |
| CH159   | 5795            | 21.84              | 1.86        | 23.70                            | 26.97       | 0.50         |

**Test Mode: UNII-3/ TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 25.82              | 26.97       | 0.50         |
| CH159   | 5795            | 25.87              | 26.97       | 0.50         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 18.84              | 0.34        | 19.18                            | 22.50       | 0.18         |
| CH40    | 5200            | 18.75              | 0.34        | 19.09                            | 22.50       | 0.18         |
| CH48    | 5240            | 18.65              | 0.34        | 18.99                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 17.82              | 0.34        | 18.16                            | 22.50       | 0.18         |
| CH40    | 5200            | 17.74              | 0.34        | 18.08                            | 22.50       | 0.18         |
| CH48    | 5240            | 18.06              | 0.34        | 18.40                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 21.71              | 22.50       | 0.18         |
| CH40    | 5200            | 21.62              | 22.50       | 0.18         |
| CH48    | 5240            | 21.72              | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 13.91              | 1.07        | 14.98                            | 22.50       | 0.18         |
| CH46    | 5230            | 18.02              | 1.07        | 19.09                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 13.45              | 1.07        | 14.52                            | 22.50       | 0.18         |
| CH46    | 5230            | 17.62              | 1.07        | 18.69                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 17.77              | 22.50       | 0.18         |
| CH46    | 5230            | 21.90              | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 15.07              | 2.06        | 17.13                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 14.53              | 2.06        | 16.59                            | 22.50       | 0.18         |

**Test Mode: UNII-1/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH42    | 5210            | 19.88              | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 17.81              | 0.34        | 18.15                            | 22.50       | 0.18         |
| CH60    | 5300            | 17.84              | 0.34        | 18.18                            | 22.50       | 0.18         |
| CH64    | 5320            | 17.96              | 0.34        | 18.30                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 17.84              | 0.34        | 18.18                            | 22.50       | 0.18         |
| CH60    | 5300            | 17.79              | 0.34        | 18.13                            | 22.50       | 0.18         |
| CH64    | 5320            | 17.64              | 0.34        | 17.98                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 21.18              | 22.50       | 0.18         |
| CH60    | 5300            | 21.17              | 22.50       | 0.18         |
| CH64    | 5320            | 21.15              | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 17.04              | 1.07        | 18.11                            | 22.50       | 0.18         |
| CH62    | 5310            | 13.77              | 1.07        | 14.84                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 17.04              | 1.07        | 18.11                            | 22.50       | 0.18         |
| CH62    | 5310            | 13.98              | 1.07        | 15.05                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 21.12              | 22.50       | 0.18         |
| CH62    | 5310            | 17.96              | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 12.91              | 2.06        | 14.97                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 13.24              | 2.06        | 15.30                            | 22.50       | 0.18         |

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH58    | 5290            | 18.15              | 22.50       | 0.18         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 16.07              | 0.34        | 16.41                            | 21.02       | 0.13         |
| CH116   | 5580            | 15.23              | 0.34        | 15.57                            | 21.02       | 0.13         |
| CH140   | 5700            | 11.73              | 0.34        | 12.07                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 16.89              | 0.34        | 17.23                            | 21.02       | 0.13         |
| CH116   | 5580            | 16.80              | 0.34        | 17.14                            | 21.02       | 0.13         |
| CH140   | 5700            | 13.81              | 0.34        | 14.15                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 19.85              | 21.02       | 0.13         |
| CH116   | 5580            | 19.44              | 21.02       | 0.13         |
| CH140   | 5700            | 16.24              | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 12.44              | 1.07        | 13.51                            | 21.02       | 0.13         |
| CH110   | 5550            | 14.35              | 1.07        | 15.42                            | 21.02       | 0.13         |
| CH134   | 5670            | 13.85              | 1.07        | 14.92                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 13.65              | 1.07        | 14.72                            | 21.02       | 0.13         |
| CH110   | 5550            | 15.90              | 1.07        | 16.97                            | 21.02       | 0.13         |
| CH134   | 5670            | 16.01              | 1.07        | 17.08                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 17.17              | 21.02       | 0.13         |
| CH110   | 5550            | 19.27              | 21.02       | 0.13         |
| CH134   | 5670            | 19.14              | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 13.42              | 2.06        | 15.48                            | 21.02       | 0.13         |
| CH122   | 5610            | 13.52              | 2.06        | 15.58                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 12.78              | 2.06        | 14.84                            | 21.02       | 0.13         |
| CH122   | 5610            | 15.48              | 2.06        | 17.54                            | 21.02       | 0.13         |

**Test Mode: UNII-2C/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH106   | 5530            | 18.18              | 21.02       | 0.13         |
| CH122   | 5610            | 19.68              | 21.02       | 0.13         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 21.68              | 0.34        | 22.02                            | 26.97       | 0.50         |
| CH157   | 5785            | 21.82              | 0.34        | 22.16                            | 26.97       | 0.50         |
| CH165   | 5825            | 21.10              | 0.34        | 21.44                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 22.40              | 0.34        | 22.74                            | 26.97       | 0.50         |
| CH157   | 5785            | 22.19              | 0.34        | 22.53                            | 26.97       | 0.50         |
| CH165   | 5825            | 21.57              | 0.34        | 21.91                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 25.41              | 26.97       | 0.50         |
| CH157   | 5785            | 25.36              | 26.97       | 0.50         |
| CH165   | 5825            | 24.69              | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 20.87              | 1.07        | 21.94                            | 26.97       | 0.50         |
| CH159   | 5795            | 21.18              | 1.07        | 22.25                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 21.71              | 1.07        | 22.78                            | 26.97       | 0.50         |
| CH159   | 5795            | 21.62              | 1.07        | 22.69                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 25.39              | 26.97       | 0.50         |
| CH159   | 5795            | 25.49              | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 19.45              | 2.06        | 21.51                            | 26.97       | 0.50         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 19.85              | 2.06        | 21.91                            | 26.97       | 0.50         |


**Test Mode: UNII-3/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH155   | 5775            | 24.72              | 26.97       | 0.50         |


## ATTACHMENT G - POWER SPECTRAL DENSITY

**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.05                    | 0.35        | 4.40                                  | 11.00           |
| CH40    | 5200            | 4.04                    | 0.35        | 4.39                                  | 11.00           |
| CH48    | 5240            | 4.15                    | 0.35        | 4.50                                  | 11.00           |

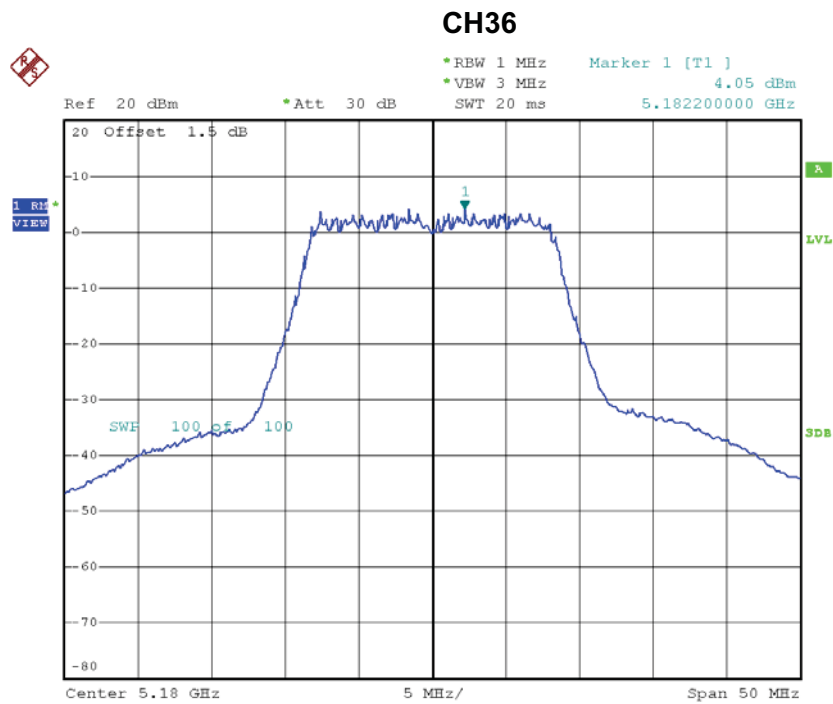


Date: 12.MAY.2016 17:16:52




**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.16                    | 0.35        | 4.51                                  | 11.00           |
| CH40    | 5200            | 4.29                    | 0.35        | 4.64                                  | 11.00           |
| CH48    | 5240            | 4.10                    | 0.35        | 4.45                                  | 11.00           |

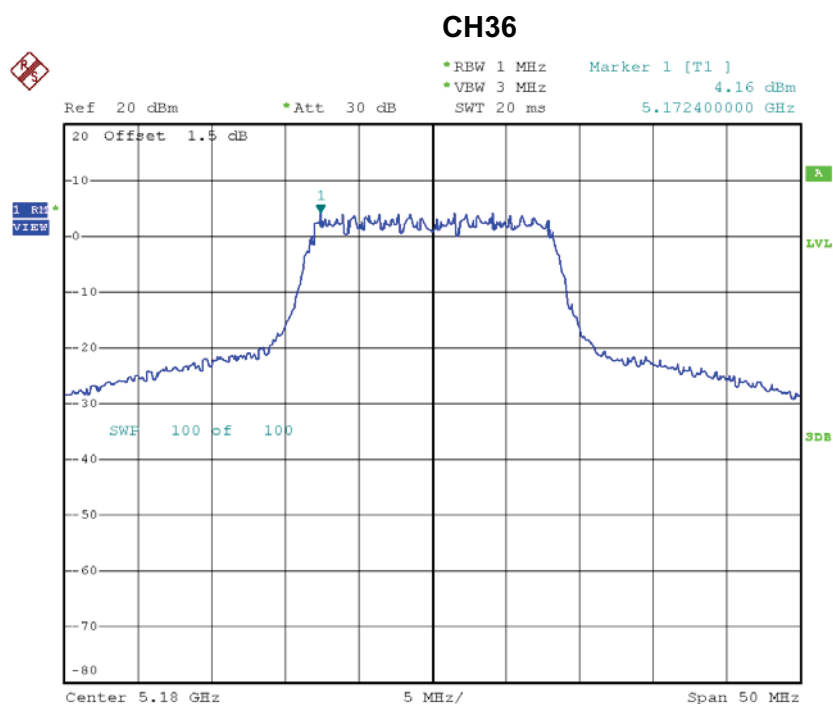


Date: 12.MAY.2016 17:24:53




Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 1

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | -0.77                   | 0.71        | -0.06                                 | 9.50            |
| CH40    | 5200            | -0.95                   | 0.71        | -0.24                                 | 9.50            |
| CH48    | 5240            | -0.33                   | 0.71        | 0.38                                  | 9.50            |

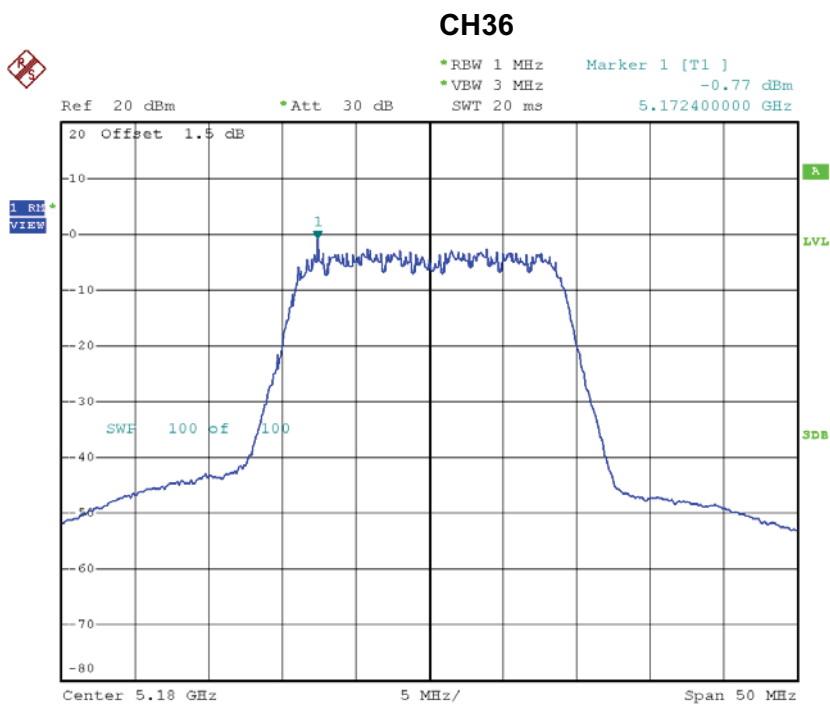


Date: 12.MAY.2016 17:46:49

### CH40

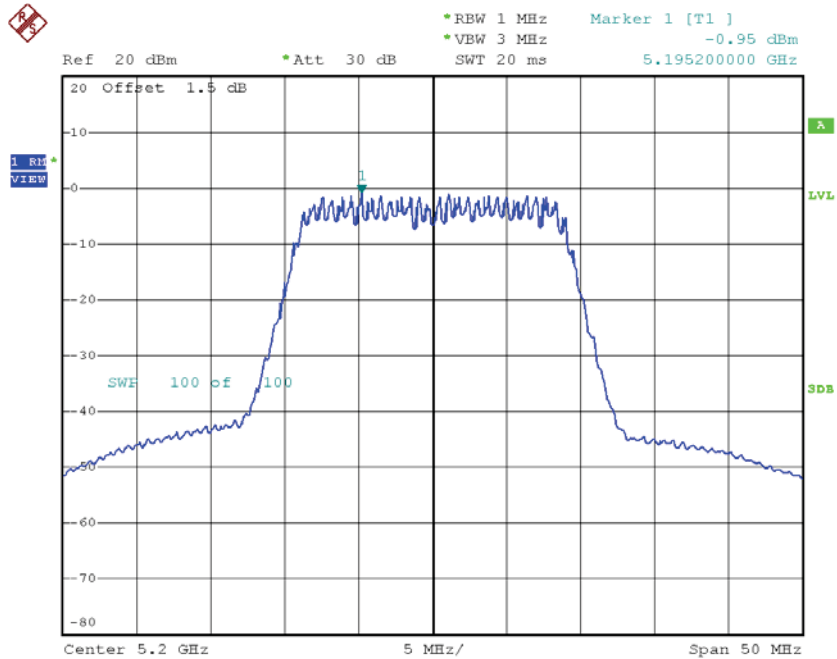

Date: 12.MAY.2016 17:51:24


### CH48

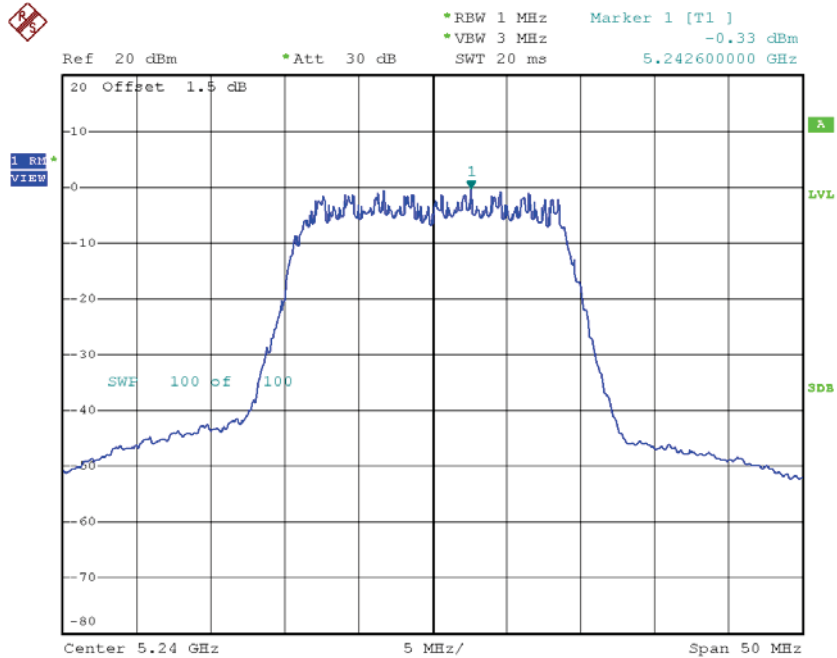

Date: 12.MAY.2016 17:56:35


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | -0.68                   | 0.71        | 0.03                                  | 9.50            |
| CH40    | 5200            | -0.76                   | 0.71        | -0.05                                 | 9.50            |
| CH48    | 5240            | -0.96                   | 0.71        | -0.25                                 | 9.50            |

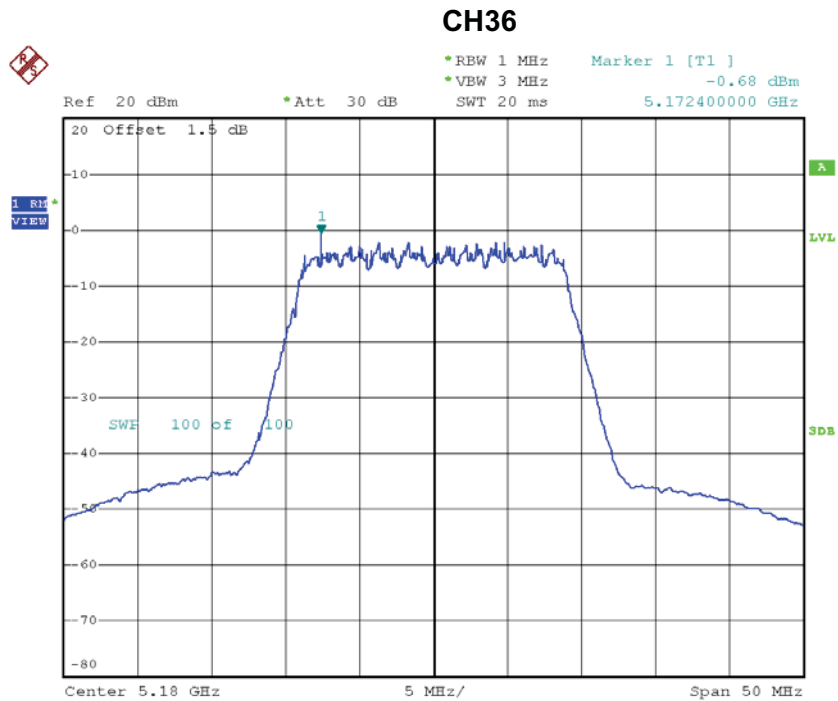


Date: 12.MAY.2016 17:47:14

### CH40

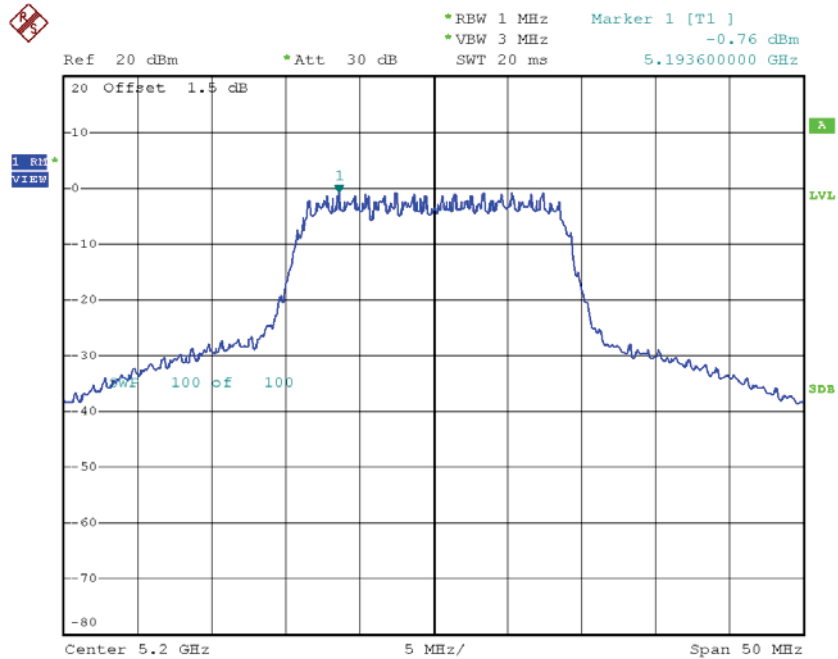

Date: 12.MAY.2016 17:52:01

### CH48

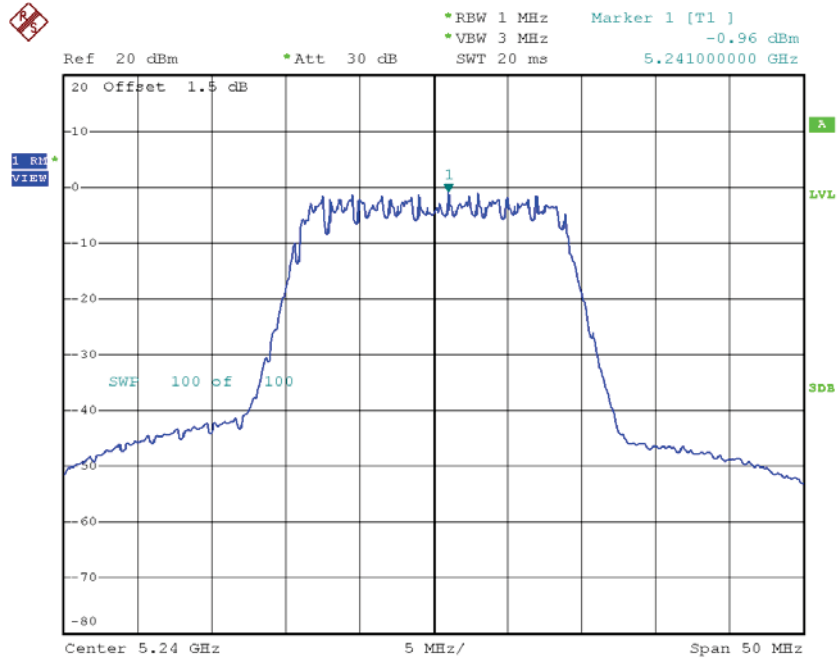

Date: 12.MAY.2016 17:55:05


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH36    | 5180               | 3.00                       | 9.50               |
| CH40    | 5200               | 2.87                       | 9.50               |
| CH48    | 5240               | 3.09                       | 9.50               |

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 1**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH38    | 5190               | -1.82                      | 1.86        | 0.04                                        | 9.50               |
| CH46    | 5230               | -1.89                      | 1.86        | -0.03                                       | 9.50               |

### CH38

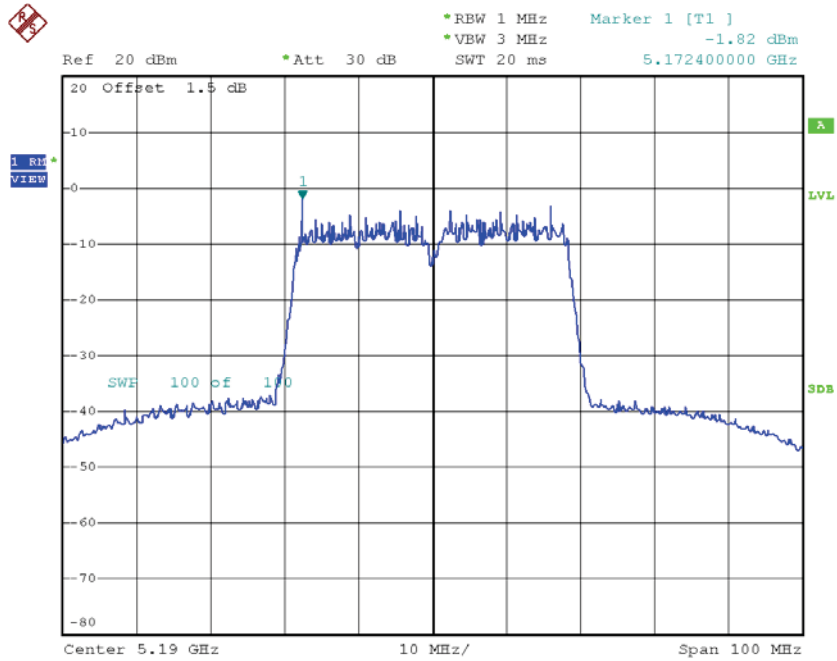

Date: 12.MAY.2016 19:56:11

### CH46

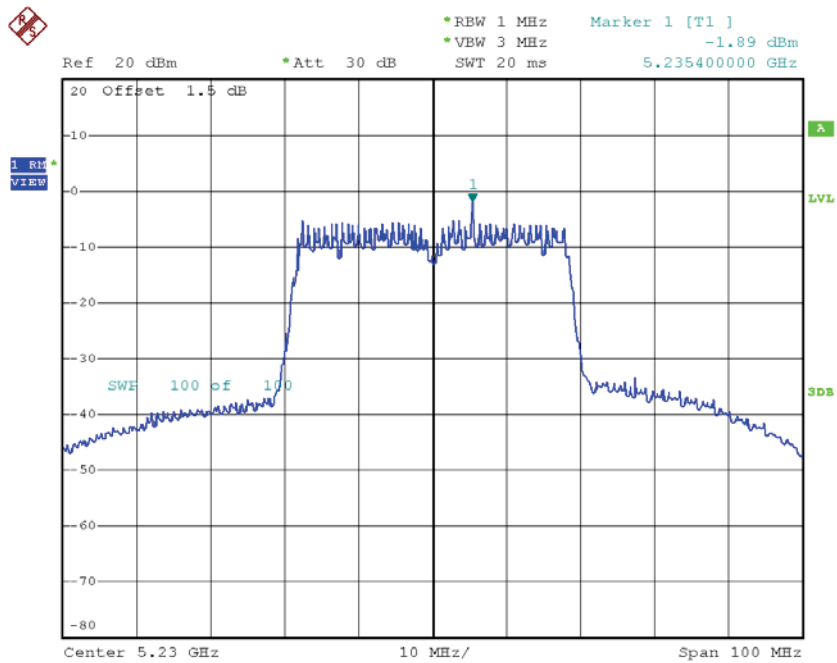


Date: 12.MAY.2016 20:04:45

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 2**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH38    | 5190               | -1.64                      | 1.86        | 0.22                                        | 9.50               |
| CH46    | 5230               | -1.53                      | 1.86        | 0.33                                        | 9.50               |

### CH38

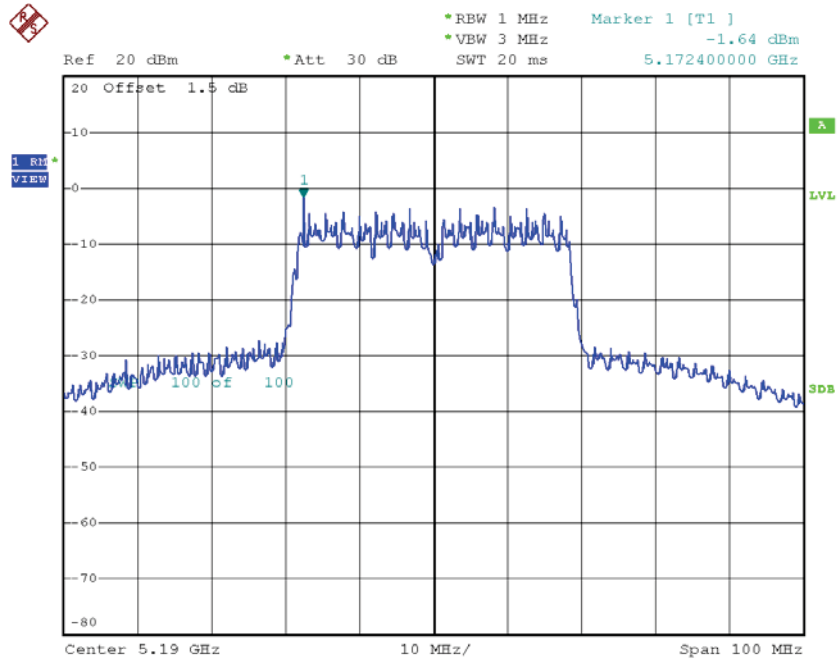

Date: 12.MAY.2016 19:56:53

### CH46

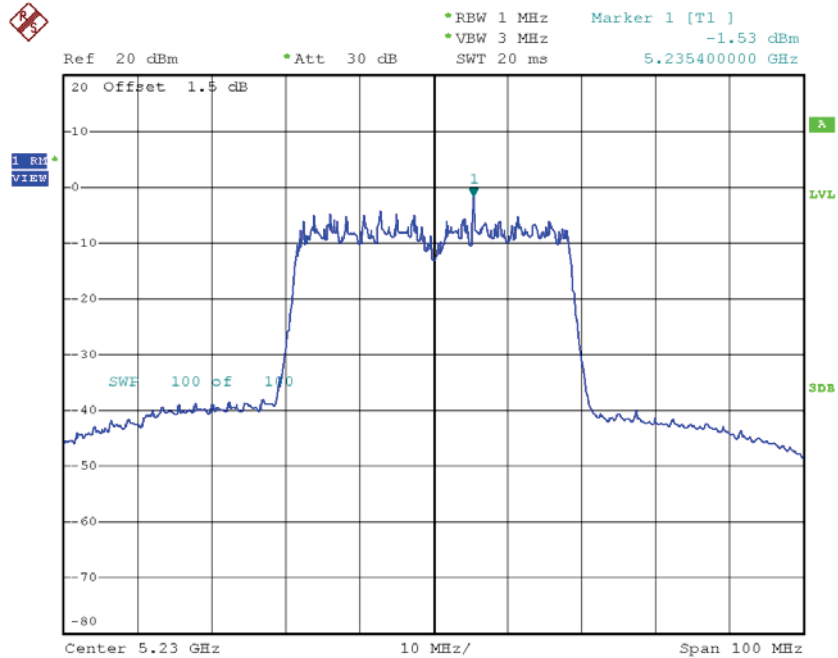


Date: 12.MAY.2016 20:04:14

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH38    | 5190               | 3.14                       | 9.50               |
| CH46    | 5230               | 3.16                       | 9.50               |


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 5.46                    | 0.35        | 5.81                                  | 11.00           |
| CH60    | 5300            | 6.23                    | 0.35        | 6.58                                  | 11.00           |
| CH64    | 5320            | 5.81                    | 0.35        | 6.16                                  | 11.00           |

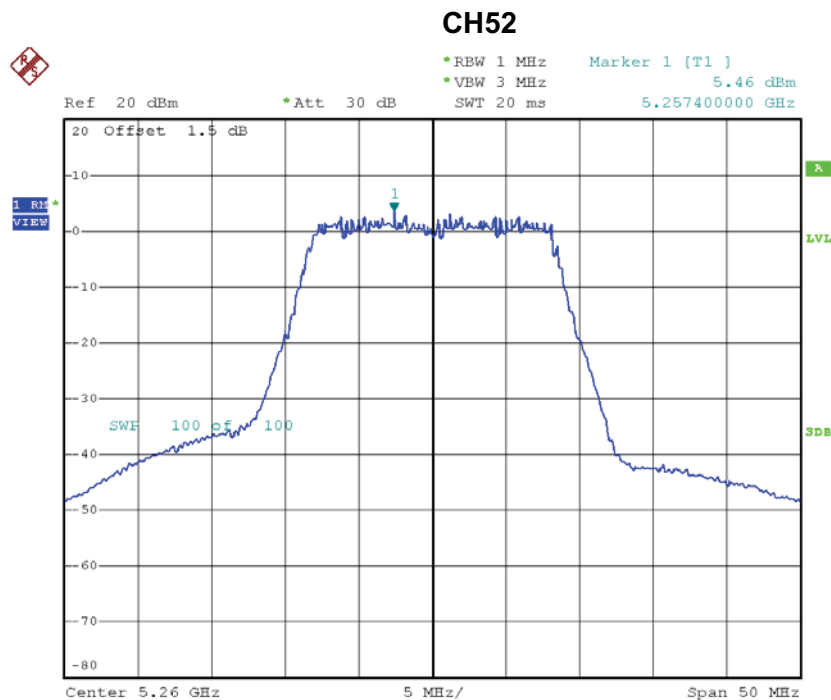


Date: 26.APR.2016 17:33:41

### CH60

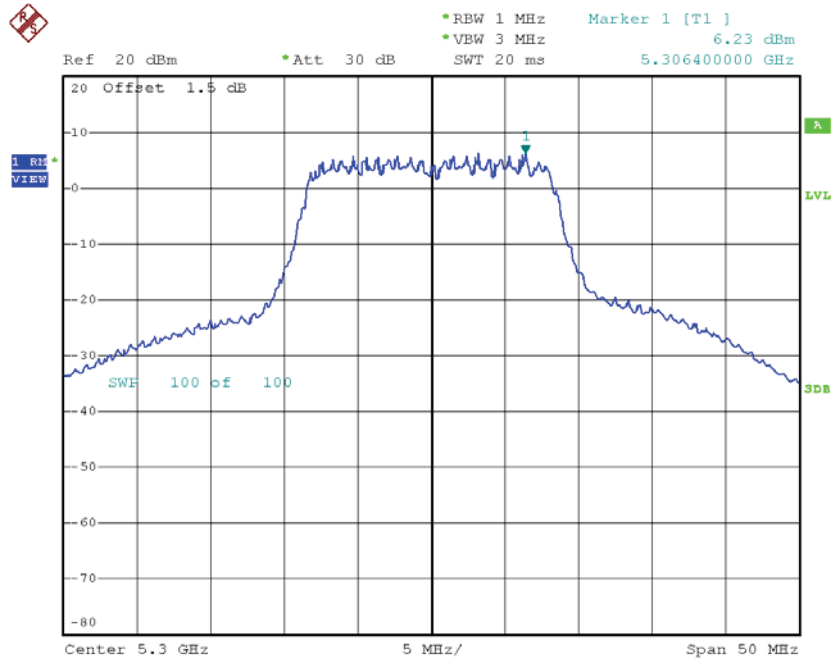

Date: 12.MAY.2016 11:54:48


### CH64

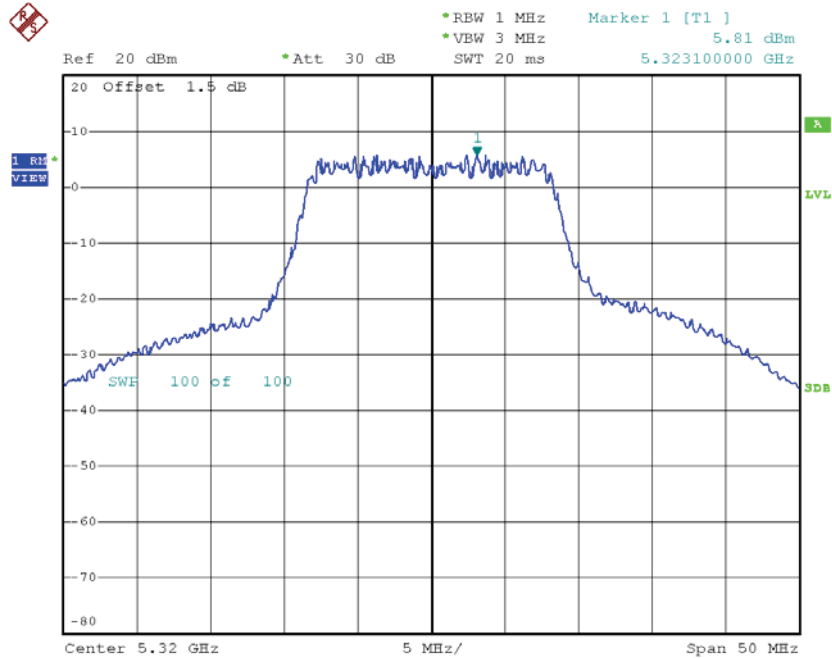

Date: 12.MAY.2016 11:55:28

**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 6.65                    | 0.35        | 7.00                                  | 11.00           |
| CH60    | 5300            | 5.97                    | 0.35        | 6.32                                  | 11.00           |
| CH64    | 5320            | 6.36                    | 0.35        | 6.71                                  | 11.00           |

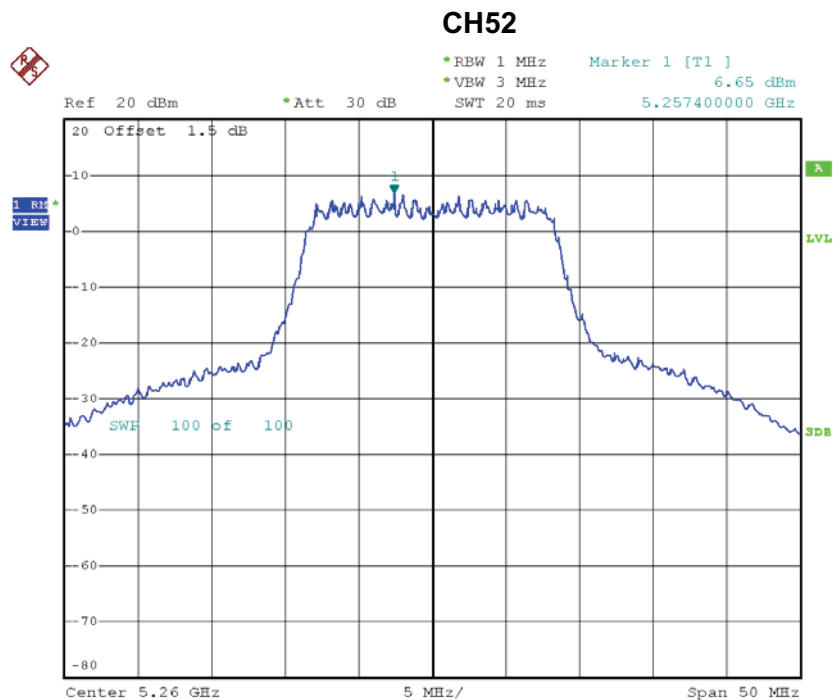

Date: 12.MAY.2016 11:58:42