
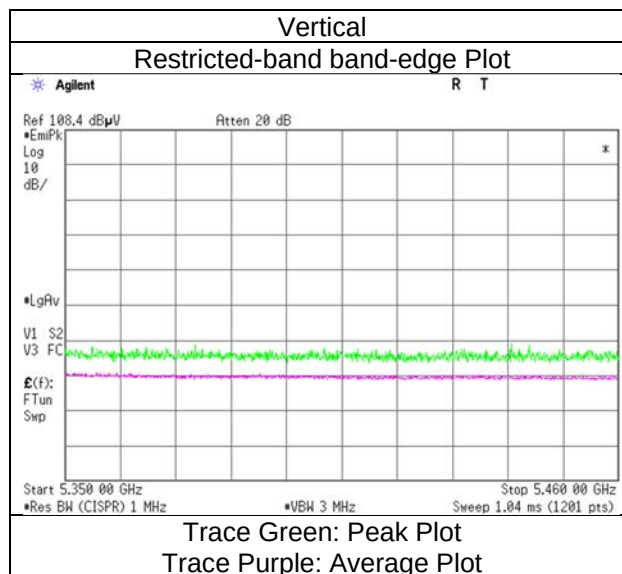


Radiated Spurious Emission

Mode	Tx 11a 5320 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz

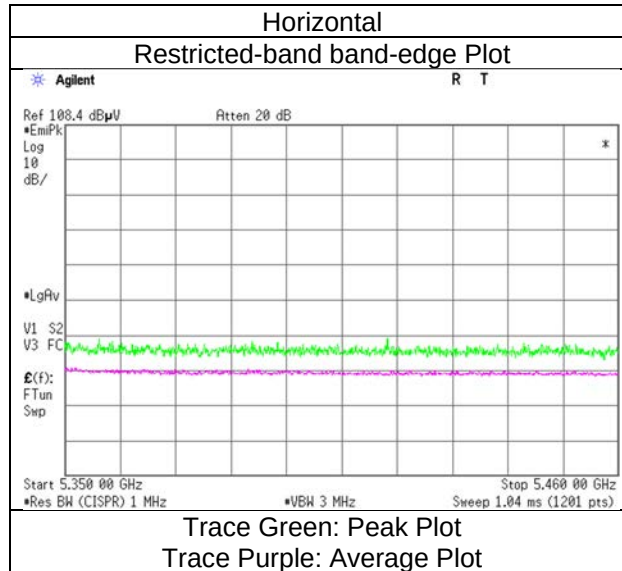

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11a 5500 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	44.3	35.6	31.8	3.7	32.3	2.0	47.5	40.7	68.2	53.9	20.7	13.2	*1)
Hori.	5470.0	44.8	-	31.8	3.7	32.3	-	48.0	-	68.2	-	20.3	-	-
Hori.	11000.0	41.4	33.4	37.3	6.8	32.9	-	52.6	44.7	73.9	53.9	21.3	9.2	Floor noise
Hori.	16500.0	42.7	-	39.6	8.1	32.4	-	58.0	-	68.2	-	10.2	-	Floor noise
Hori.	38500.0	65.4	-	43.8	4.9	73.4	-	40.7	-	68.2	-	27.5	-	-
Vert.	5460.0	44.1	35.1	31.8	3.7	32.3	2.0	47.3	40.3	68.2	53.9	20.9	13.6	*1)
Vert.	5470.0	44.2	-	31.8	3.7	32.3	-	47.4	-	68.2	-	20.8	-	-
Vert.	11000.0	41.1	33.2	37.3	6.8	32.9	-	52.3	44.4	73.9	53.9	21.6	9.5	Floor noise
Vert.	16500.0	42.1	-	39.6	8.1	32.4	-	57.4	-	68.2	-	10.8	-	Floor noise
Vert.	38500.0	70.1	-	43.8	4.9	73.4	-	45.4	-	68.2	-	22.8	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11a 5500 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz

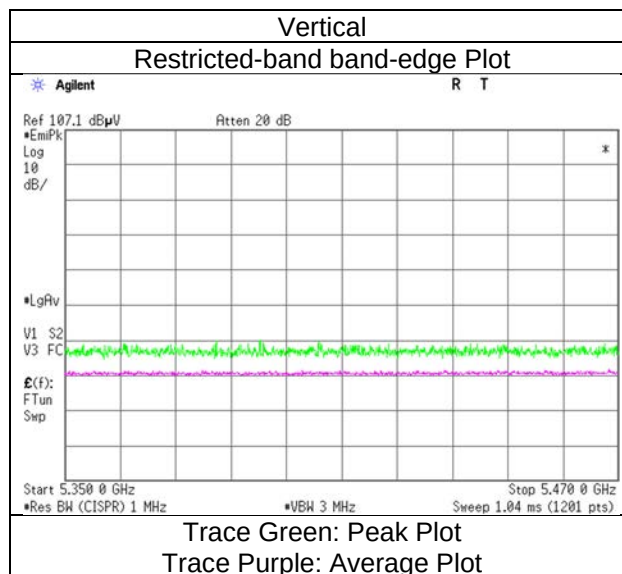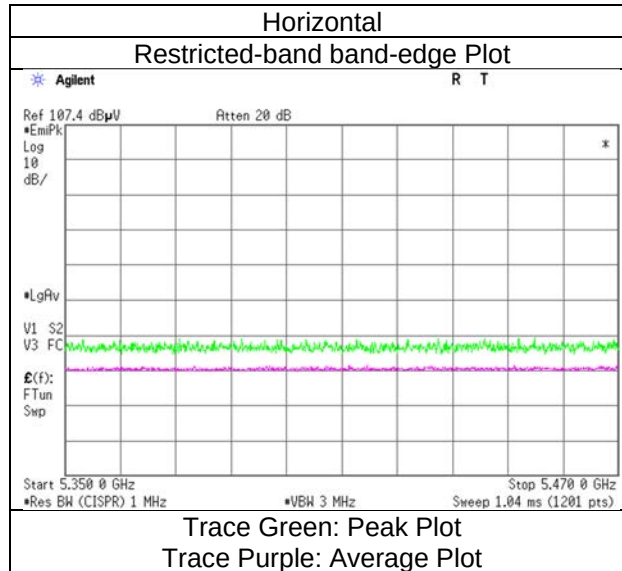

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11a 5600 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11200.0	38.0	34.2	37.2	6.9	32.9	-	49.2	45.4	73.9	53.9	24.7	8.5	Floor noise
Hori.	16800.0	39.6	-	39.3	8.2	32.5	-	54.5	-	68.2	-	13.7	-	Floor noise
Hori.	39200.0	65.0	57.3	43.8	5.0	73.8	2.0	40.0	34.2	73.9	53.9	33.9	19.7	*2)
Vert.	11200.0	37.9	34.2	37.2	6.9	32.9	-	49.1	45.4	73.9	53.9	24.8	8.5	Floor noise
Vert.	16800.0	39.5	-	39.3	8.2	32.5	-	54.5	-	68.2	-	13.7	-	Floor noise
Vert.	39200.0	69.7	65.5	43.8	5.0	73.8	2.0	44.7	42.4	73.9	53.9	29.2	11.5	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Radiated Spurious Emission

Mode	Tx 11a 5700 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	46.2	-	31.9	3.8	32.3	-	49.7	-	68.2	-	18.6	-	
Hori.	11400.0	39.2	33.8	37.3	6.9	32.8	-	50.6	45.2	73.9	53.9	23.3	8.7	Floor noise
Hori.	17100.0	39.7	-	39.5	8.2	32.5	-	54.9	-	68.2	-	13.3	-	Floor noise
Hori.	39900.0	63.7	55.4	44.0	5.2	73.3	2.0	39.5	33.1	73.9	53.9	34.4	20.8	*2)
Vert.	5725.0	46.0	-	31.9	3.8	32.3	-	49.4	-	68.2	-	18.8	-	
Vert.	11400.0	39.3	33.6	37.3	6.9	32.8	-	50.6	44.9	73.9	53.9	23.3	9.0	Floor noise
Vert.	17100.0	39.6	-	39.5	8.2	32.5	-	54.8	-	68.2	-	13.4	-	Floor noise
Vert.	39900.0	69.3	64.6	44.0	5.2	73.3	2.0	45.1	42.3	73.9	53.9	28.8	11.6	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11a 5700 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz

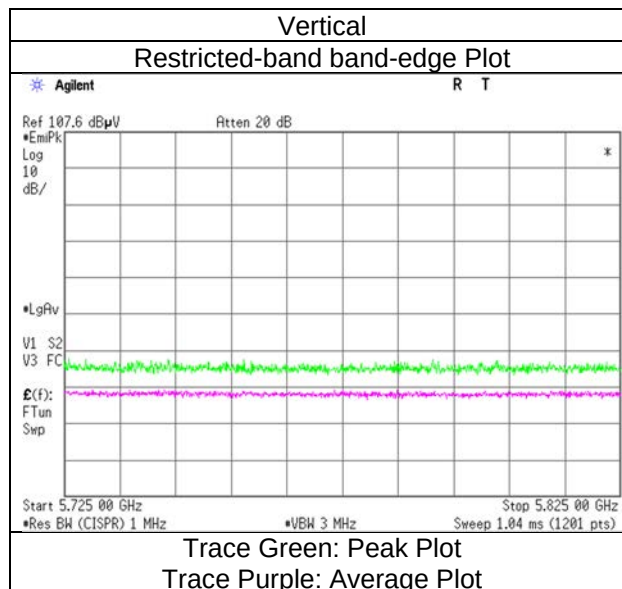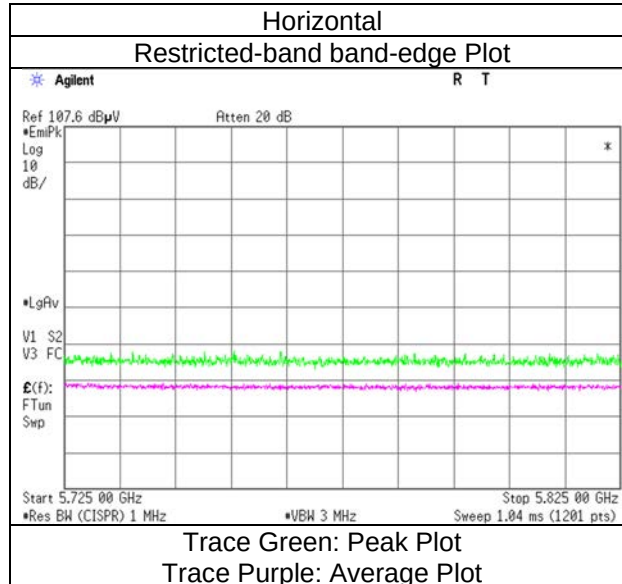

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11a 5745 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	44.3	-	31.8	3.8	32.3	-	47.5	-	68.2	-	20.7	-	
Hori.	5700.0	43.7	-	31.9	3.8	32.3	-	47.0	-	105.2	-	58.2	-	
Hori.	5720.0	45.5	-	31.9	3.8	32.3	-	49.0	-	110.8	-	61.8	-	
Hori.	5725.0	48.2	-	31.9	3.8	32.3	-	51.6	-	122.2	-	70.6	-	
Hori.	11490.0	38.2	33.7	37.3	6.9	32.8	-	49.7	45.1	73.9	53.9	24.2	8.8	Floor noise
Hori.	17235.0	38.0	-	39.7	8.2	32.5	-	53.5	-	68.2	-	14.8	-	Floor noise
Vert.	5650.0	44.0	-	31.8	3.8	32.3	-	47.2	-	68.2	-	21.0	-	
Vert.	5700.0	43.4	-	31.9	3.8	32.3	-	46.8	-	105.2	-	58.4	-	
Vert.	5720.0	45.3	-	31.9	3.8	32.3	-	48.7	-	110.8	-	62.1	-	
Vert.	5725.0	47.9	-	31.9	3.8	32.3	-	51.3	-	122.2	-	70.9	-	
Vert.	11490.0	38.2	33.8	37.3	6.9	32.8	-	49.6	45.2	73.9	53.9	24.3	8.7	Floor noise
Vert.	17235.0	37.9	-	39.7	8.2	32.5	-	53.4	-	68.2	-	14.9	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11a 5745 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz

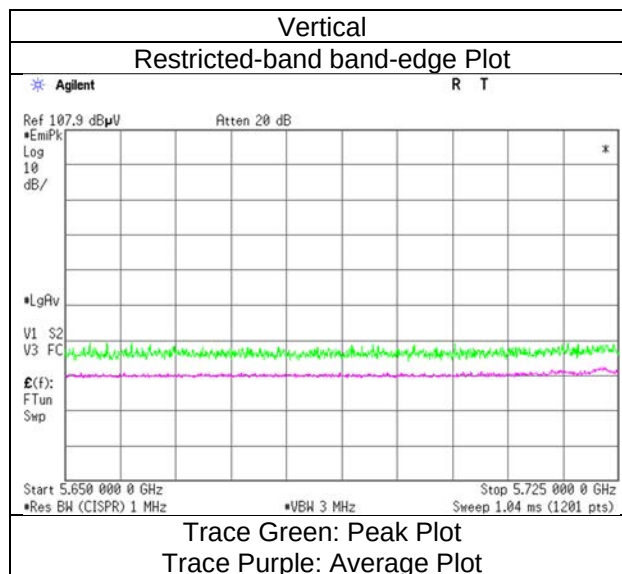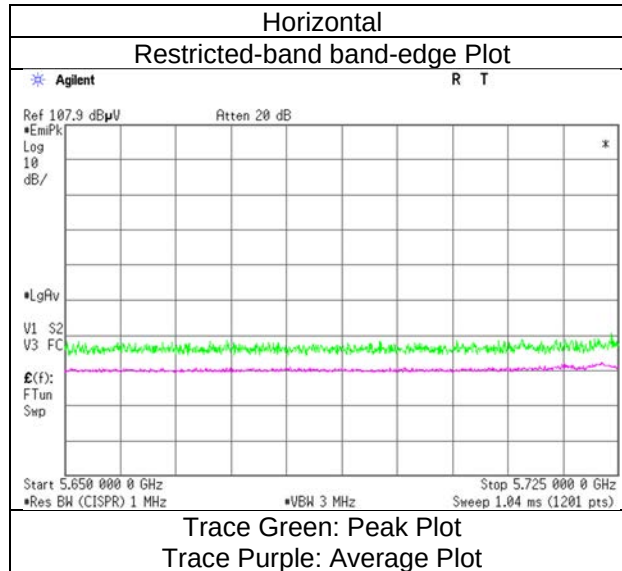

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11a 5785 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11570.0	39.7	33.1	37.3	6.9	32.8	-	51.1	44.5	73.9	53.9	22.8	9.4	Floor noise
Hori.	17355.0	38.8	-	39.9	8.2	32.6	-	54.3	-	68.2	-	13.9	-	Floor noise
Vert.	11570.0	39.7	33.0	37.3	6.9	32.8	-	51.1	44.4	73.9	53.9	22.8	9.5	Floor noise
Vert.	17355.0	38.6	-	39.9	8.2	32.6	-	54.1	-	68.2	-	14.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11a 5825 MHz
------	-----------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 17, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	46.5	-	32.3	3.9	32.3	-	50.3	-	122.2	-	71.9	-	
Hori.	5855.0	45.3	-	32.3	3.9	32.3	-	49.1	-	110.8	-	61.7	-	
Hori.	5875.0	45.7	-	32.3	3.9	32.3	-	49.6	-	105.2	-	55.6	-	
Hori.	5925.0	45.4	-	32.4	3.9	32.3	-	49.4	-	68.2	-	18.8	-	
Hori.	11650.0	40.4	32.4	37.3	7.0	32.8	-	51.8	43.9	73.9	53.9	22.1	10.0	Floor noise
Hori.	17475.0	39.0	-	40.0	8.3	32.6	-	54.6	-	68.2	-	13.6	-	Floor noise
Vert.	5850.0	46.2	-	32.3	3.9	32.3	-	50.0	-	122.2	-	72.2	-	
Vert.	5855.0	45.0	-	32.3	3.9	32.3	-	48.8	-	110.8	-	62.0	-	
Vert.	5875.0	45.4	-	32.3	3.9	32.3	-	49.3	-	105.2	-	55.9	-	
Vert.	5925.0	45.1	-	32.4	3.9	32.3	-	49.1	-	68.2	-	19.1	-	
Vert.	11650.0	41.0	32.7	37.3	7.0	32.8	-	52.4	44.1	73.9	53.9	21.5	9.8	Floor noise
Vert.	17475.0	38.9	-	40.0	8.3	32.6	-	54.6	-	68.2	-	13.6	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11a 5825 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 22, 2026	SAC2	24 deg. C	46 % RH	Takumi Nishida	1 GHz to 10 GHz

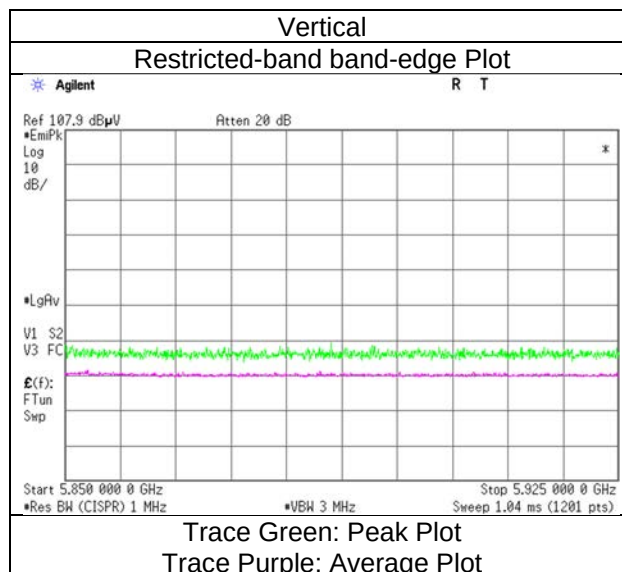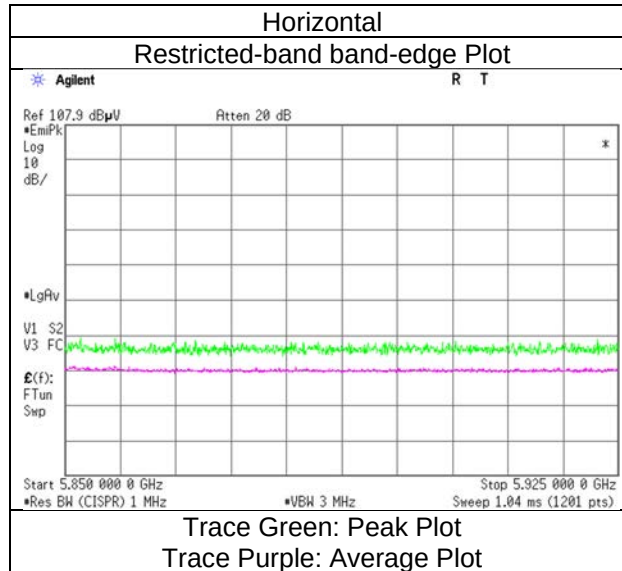

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5180 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	49.5	37.2	31.9	3.6	32.4	2.0	52.6	42.2	73.9	53.9	21.4	11.7	*1)
Hori.	10360.0	37.0	-	35.9	6.7	32.7	-	46.9	-	68.2	-	21.3	-	Floor noise
Hori.	15540.0	39.8	30.5	39.0	8.1	32.3	-	54.7	45.4	73.9	53.9	19.2	8.5	Floor noise
Hori.	36260.0	67.5	-	43.6	4.4	74.4	-	41.1	-	68.2	-	27.1	-	-
Vert.	5150.0	49.3	36.9	31.9	3.6	32.4	2.0	52.4	42.0	73.9	53.9	21.5	11.9	*1)
Vert.	10360.0	36.9	-	35.9	6.7	32.7	-	46.8	-	68.2	-	21.4	-	Floor noise
Vert.	15540.0	39.9	30.3	39.0	8.1	32.3	-	54.8	45.2	73.9	53.9	19.1	8.7	Floor noise
Vert.	36260.0	68.7	-	43.6	4.4	74.4	-	42.3	-	68.2	-	25.9	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5180 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

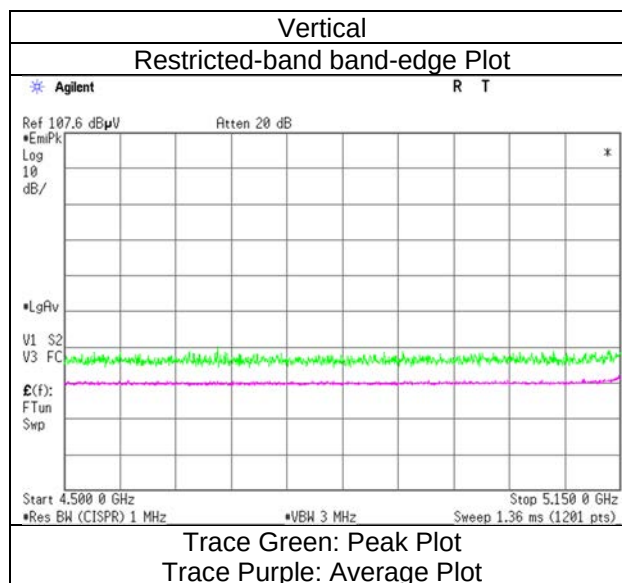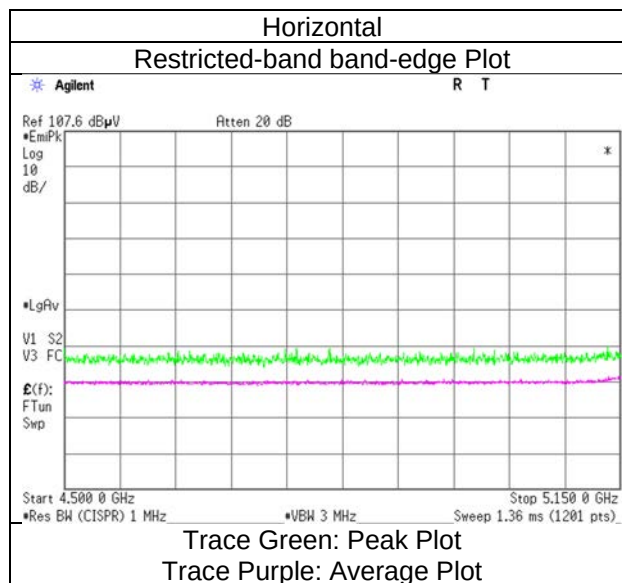

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5220 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
May 19, 2026	SAC2	23 deg. C	55 % RH	Yuta Moriya	Below 1 GHz
May 20, 2026	SAC2	22 deg. C	55 % RH	Yuta Moriya	Above 1 GHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	33.6	21.4	-	17.4	6.8	28.6	-	17.0	-	40.0	-	23.0	-	
Hori.	63.1	21.4	-	7.3	7.1	28.5	-	7.3	-	40.0	-	32.7	-	
Hori.	74.5	21.4	-	6.5	7.3	28.5	-	6.7	-	40.0	-	33.4	-	
Hori.	113.5	21.5	-	12.2	7.6	28.4	-	12.9	-	43.5	-	30.6	-	
Hori.	603.0	21.8	-	19.3	10.3	29.3	-	22.1	-	46.0	-	23.9	-	
Hori.	895.1	21.4	-	22.0	11.3	28.9	-	25.8	-	46.0	-	20.2	-	
Hori.	10440.0	44.4	-	35.9	5.9	36.8	-	49.5	-	68.2	-	18.7	-	Floor noise
Hori.	15660.0	45.0	37.2	39.3	6.9	38.2	-	53.0	45.3	73.9	53.9	20.9	8.6	Floor noise
Hori.	36540.0	67.2	-	43.7	4.4	74.0	-	41.3	-	68.2	-	26.9	-	
Vert.	33.6	23.5	-	17.4	6.8	28.6	-	19.2	-	40.0	-	20.8	-	
Vert.	63.1	24.4	-	7.3	7.1	28.5	-	10.3	-	40.0	-	29.7	-	
Vert.	74.5	24.4	-	6.5	7.3	28.5	-	9.6	-	40.0	-	30.4	-	
Vert.	113.5	26.7	-	12.2	7.6	28.4	-	18.1	-	43.5	-	25.4	-	
Vert.	603.0	21.7	-	19.3	10.3	29.3	-	22.0	-	46.0	-	24.0	-	
Vert.	895.1	21.7	-	22.0	11.3	28.9	-	26.1	-	46.0	-	19.9	-	
Vert.	10440.0	44.4	-	35.9	5.9	36.8	-	49.5	-	68.2	-	18.7	-	Floor noise
Vert.	15660.0	45.0	37.2	39.3	6.9	38.2	-	53.0	45.3	73.9	53.9	20.9	8.6	Floor noise
Vert.	36540.0	66.8	-	43.7	4.4	74.0	-	40.9	-	68.2	-	27.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5260 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10520.0	41.4	-	36.0	6.7	32.7	-	51.3	-	68.2	-	16.9	-	Floor noise
Hori.	15780.0	40.9	32.4	39.3	8.1	32.3	-	56.0	47.5	73.9	53.9	17.9	6.4	Floor noise
Hori.	36820.0	66.1	-	43.8	4.5	73.7	-	40.7	-	68.2	-	27.5	-	
Vert.	10520.0	41.5	-	36.0	6.7	32.7	-	51.4	-	68.2	-	16.8	-	Floor noise
Vert.	15780.0	40.6	32.4	39.3	8.1	32.3	-	55.7	47.5	73.9	53.9	18.2	6.4	Floor noise
Vert.	36820.0	67.1	-	43.8	4.5	73.7	-	41.7	-	68.2	-	26.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5320 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	49.3	37.4	31.6	3.7	32.3	2.0	52.2	42.3	73.9	53.9	21.7	11.6	*1)
Hori.	10640.0	38.0	33.3	36.4	6.8	32.8	-	48.3	43.6	73.9	53.9	25.6	10.3	Floor noise
Hori.	15960.0	38.5	31.7	39.6	8.1	32.4	-	53.8	47.0	73.9	53.9	20.2	6.9	Floor noise
Hori.	37240.0	67.0	-	43.8	4.6	73.3	-	42.1	-	68.2	-	26.1	-	-
Vert.	5350.0	49.0	37.2	31.6	3.7	32.3	2.0	51.9	42.1	73.9	53.9	22.0	11.8	*1)
Vert.	10640.0	37.6	33.6	36.4	6.8	32.8	-	47.9	43.9	73.9	53.9	26.0	10.0	Floor noise
Vert.	15960.0	38.8	31.7	39.6	8.1	32.4	-	54.1	47.0	73.9	53.9	19.8	6.9	Floor noise
Vert.	37240.0	69.7	-	43.8	4.6	73.3	-	44.8	-	68.2	-	23.4	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5320 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

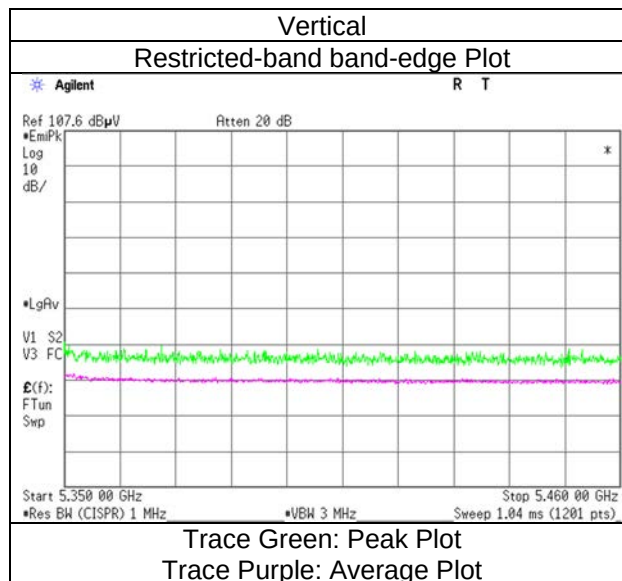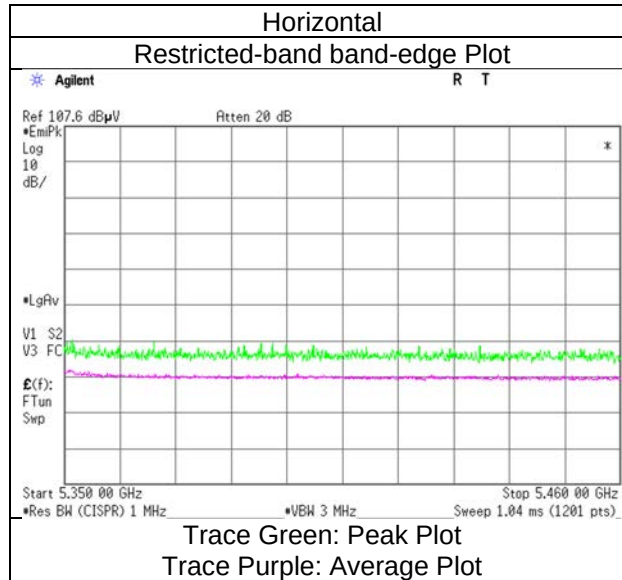

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5500 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	43.9	35.2	31.8	3.7	32.3	2.0	47.1	40.4	68.2	53.9	21.1	13.5	*1)
Hori.	5470.0	45.1	-	31.8	3.7	32.3	-	48.3	-	68.2	-	19.9	-	-
Hori.	11000.0	41.3	33.8	37.3	6.8	32.9	-	52.6	45.0	73.9	53.9	21.3	8.9	Floor noise
Hori.	16500.0	42.9	-	39.6	8.1	32.4	-	58.2	-	68.2	-	10.0	-	Floor noise
Hori.	38500.0	68.6	-	43.8	4.9	73.4	-	43.9	-	68.2	-	24.3	-	-
Vert.	5460.0	43.8	35.0	31.8	3.7	32.3	2.0	46.9	40.2	68.2	53.9	21.3	13.7	*1)
Vert.	5470.0	45.0	-	31.8	3.7	32.3	-	48.2	-	68.2	-	20.0	-	-
Vert.	11000.0	41.4	33.4	37.3	6.8	32.9	-	52.7	44.7	73.9	53.9	21.2	9.2	Floor noise
Vert.	16500.0	42.5	-	39.6	8.1	32.4	-	57.8	-	68.2	-	10.4	-	Floor noise
Vert.	38500.0	71.6	-	43.8	4.9	73.4	-	46.9	-	68.2	-	21.3	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5500 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

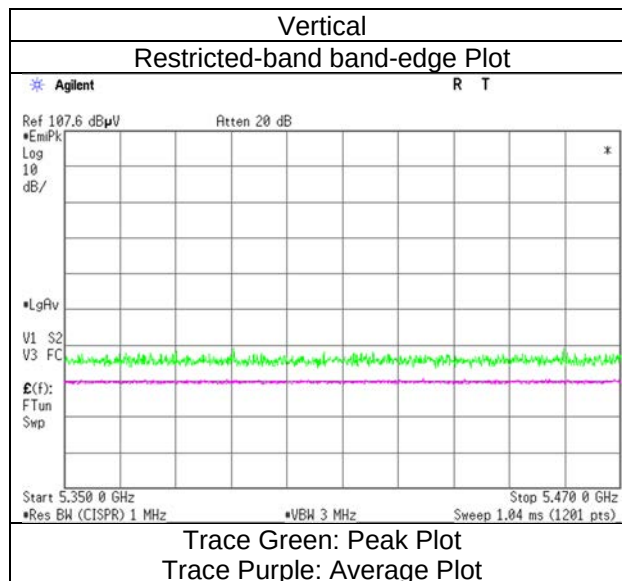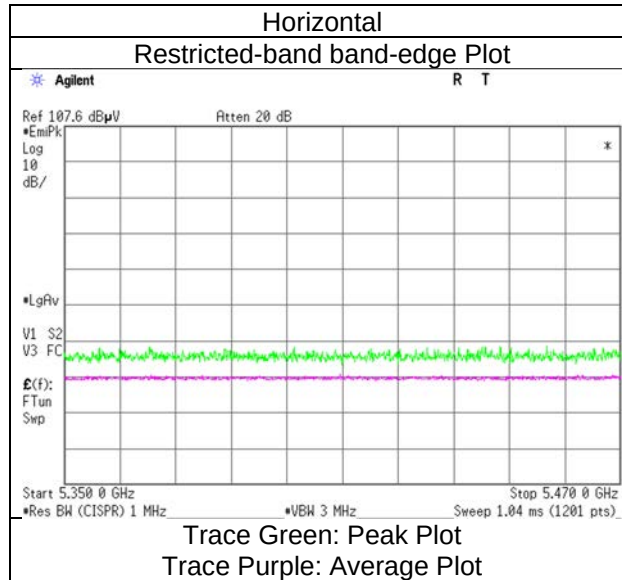

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5600 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	11200.0	38.0	34.4	37.2	6.9	32.9	-	49.1	45.6	73.9	53.9	24.8	8.4	Floor noise
Hori.	16800.0	39.8	-	39.3	8.2	32.5	-	54.7	-	68.2	-	13.5	-	Floor noise
Hori.	39200.0	70.2	63.5	43.8	5.0	73.8	2.0	45.2	40.5	73.9	53.9	28.7	13.4	*2)
Vert.	11200.0	37.9	34.8	37.2	6.9	32.9	-	49.1	45.9	73.9	53.9	24.8	8.0	Floor noise
Vert.	16800.0	40.0	-	39.3	8.2	32.5	-	54.9	-	68.2	-	13.3	-	Floor noise
Vert.	39200.0	72.2	67.2	43.8	5.0	73.8	2.0	47.2	44.2	73.9	53.9	26.7	9.7	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5700 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	49.6	-	31.9	3.8	32.3	-	53.1	-	68.2	-	15.1	-	
Hori.	11400.0	39.6	33.7	37.3	6.9	32.8	-	51.0	45.0	73.9	53.9	22.9	8.9	Floor noise
Hori.	17100.0	39.8	-	39.5	8.2	32.5	-	55.1	-	68.2	-	13.1	-	Floor noise
Hori.	39900.0	68.1	61.3	44.0	5.2	73.3	2.0	43.9	39.1	73.9	53.9	30.0	14.8	*2)
Vert.	5725.0	49.4	-	31.9	3.8	32.3	-	52.8	-	68.2	-	15.4	-	
Vert.	11400.0	40.0	33.7	37.3	6.9	32.8	-	51.4	45.1	73.9	53.9	22.5	8.8	Floor noise
Vert.	17100.0	39.5	-	39.5	8.2	32.5	-	54.7	-	68.2	-	13.5	-	Floor noise
Vert.	39900.0	71.5	66.4	44.0	5.2	73.3	2.0	47.3	44.2	73.9	53.9	26.6	9.7	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5700 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

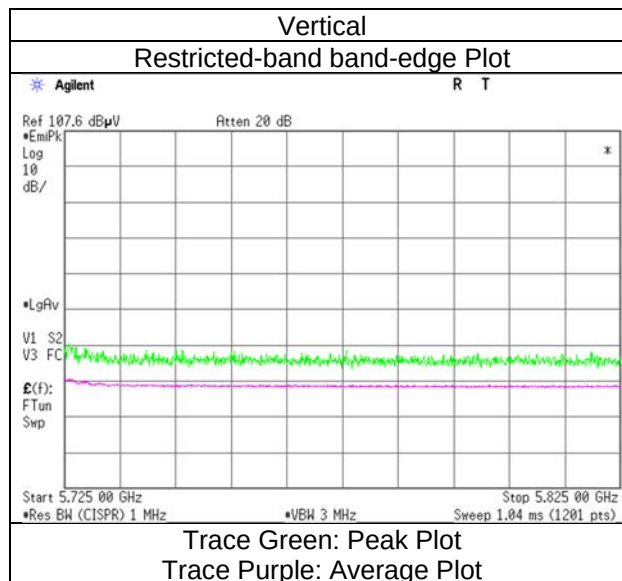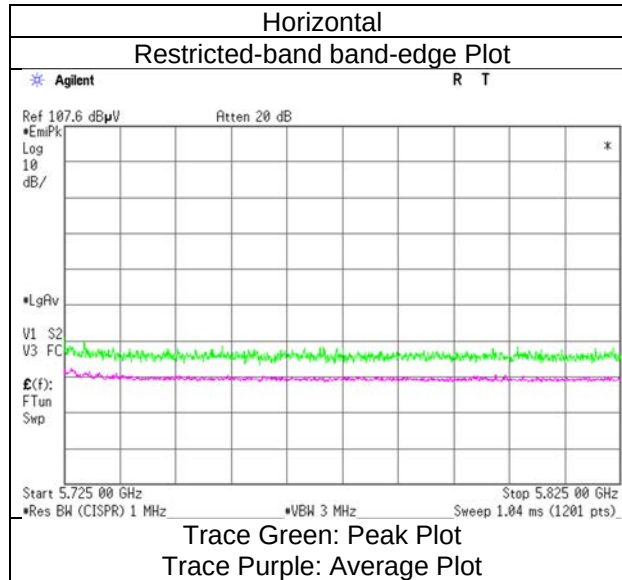

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5745 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	45.5	-	31.8	3.8	32.3	-	48.7	-	68.2	-	19.5	-	
Hori.	5700.0	45.7	-	31.9	3.8	32.3	-	49.1	-	105.2	-	56.1	-	
Hori.	5720.0	47.1	-	31.9	3.8	32.3	-	50.6	-	110.8	-	60.2	-	
Hori.	5725.0	49.3	-	31.9	3.8	32.3	-	52.8	-	122.2	-	69.4	-	
Hori.	11490.0	38.5	33.8	37.3	6.9	32.8	-	49.9	45.2	73.9	53.9	24.0	8.7	Floor noise
Hori.	17235.0	38.4	-	39.7	8.2	32.5	-	53.9	-	68.2	-	14.3	-	Floor noise
Vert.	5650.0	45.3	-	31.8	3.8	32.3	-	48.6	-	68.2	-	19.7	-	
Vert.	5700.0	45.6	-	31.9	3.8	32.3	-	49.0	-	105.2	-	56.2	-	
Vert.	5720.0	46.9	-	31.9	3.8	32.3	-	50.3	-	110.8	-	60.5	-	
Vert.	5725.0	49.2	-	31.9	3.8	32.3	-	52.7	-	122.2	-	69.6	-	
Vert.	11490.0	38.9	33.7	37.3	6.9	32.8	-	50.3	45.2	73.9	53.9	23.6	8.7	Floor noise
Vert.	17235.0	37.7	-	39.7	8.2	32.5	-	53.1	-	68.2	-	15.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5745 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

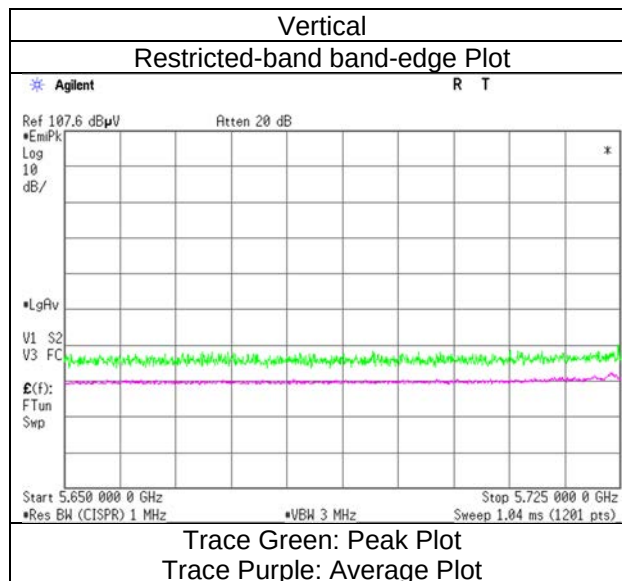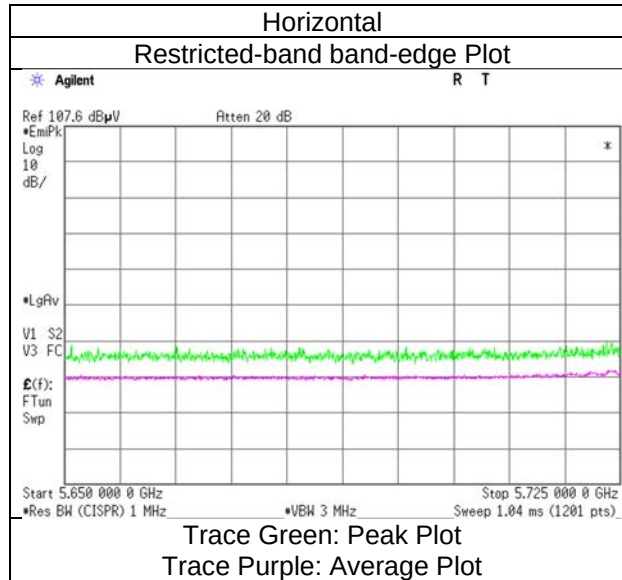

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-20 5785 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11570.0	39.7	33.5	37.3	6.9	32.8	-	51.2	45.0	73.9	53.9	22.7	9.0	Floor noise
Hori.	17355.0	38.5	-	39.9	8.2	32.6	-	54.0	-	68.2	-	14.2	-	Floor noise
Vert.	11570.0	40.0	33.6	37.3	6.9	32.8	-	51.4	45.1	73.9	53.9	22.5	8.8	Floor noise
Vert.	17355.0	38.6	-	39.9	8.2	32.6	-	54.2	-	68.2	-	14.0	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ac-20 5825 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Hiroki Numata	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Takafumi Noguchi	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	45.5	-	32.3	3.9	32.3	-	49.4	-	122.2	-	72.9	-	
Hori.	5855.0	45.0	-	32.3	3.9	32.3	-	48.8	-	110.8	-	62.0	-	
Hori.	5875.0	44.0	-	32.3	3.9	32.3	-	47.9	-	105.2	-	57.3	-	
Hori.	5925.0	43.8	-	32.4	3.9	32.3	-	47.8	-	68.2	-	20.5	-	
Hori.	11650.0	40.3	32.7	37.3	7.0	32.8	-	51.8	44.1	73.9	53.9	22.1	9.8	Floor noise
Hori.	17475.0	38.9	-	40.0	8.3	32.6	-	54.5	-	68.2	-	13.7	-	Floor noise
Vert.	5850.0	45.4	-	32.3	3.9	32.3	-	49.2	-	122.2	-	73.0	-	
Vert.	5855.0	44.7	-	32.3	3.9	32.3	-	48.5	-	110.8	-	62.3	-	
Vert.	5875.0	43.9	-	32.3	3.9	32.3	-	47.8	-	105.2	-	57.4	-	
Vert.	5925.0	43.7	-	32.4	3.9	32.3	-	47.7	-	68.2	-	20.6	-	
Vert.	11650.0	40.9	32.6	37.3	7.0	32.8	-	52.4	44.0	73.9	53.9	21.5	9.9	Floor noise
Vert.	17475.0	38.6	-	40.0	8.3	32.6	-	54.2	-	68.2	-	14.0	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-20 5825 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

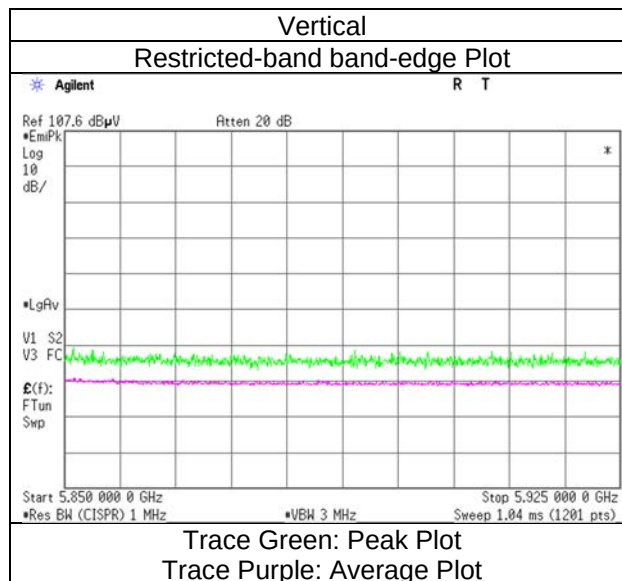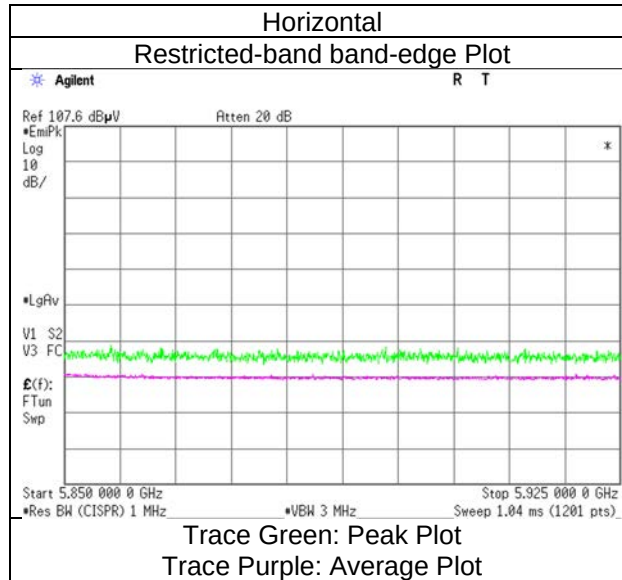

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5180 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	46.1	36.5	31.9	3.6	32.4	3.0	49.1	42.5	73.9	53.9	24.8	11.4	*1)
Hori.	10360.0	43.8	-	35.9	6.7	36.8	-	49.6	-	68.2	-	18.6	-	Floor noise
Hori.	15540.0	44.2	36.5	39.0	8.1	38.1	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Hori.	36260.0	67.0	-	43.6	4.4	74.4	-	40.6	-	68.2	-	27.6	-	-
Vert.	5150.0	46.3	36.9	31.9	3.6	32.4	3.0	49.3	42.9	73.9	53.9	24.6	11.0	*1)
Vert.	10360.0	43.8	-	35.9	6.7	36.8	-	49.6	-	68.2	-	18.6	-	Floor noise
Vert.	15540.0	44.2	36.5	39.0	8.1	38.1	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Vert.	36260.0	68.0	-	43.6	4.4	74.4	-	41.6	-	68.2	-	26.6	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5180 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

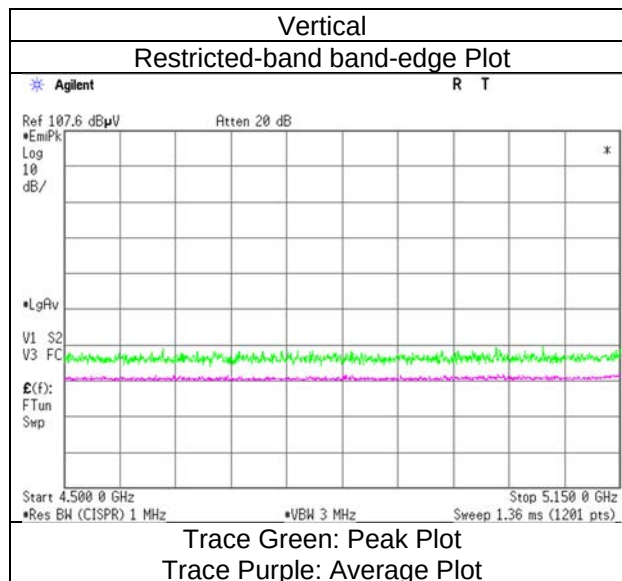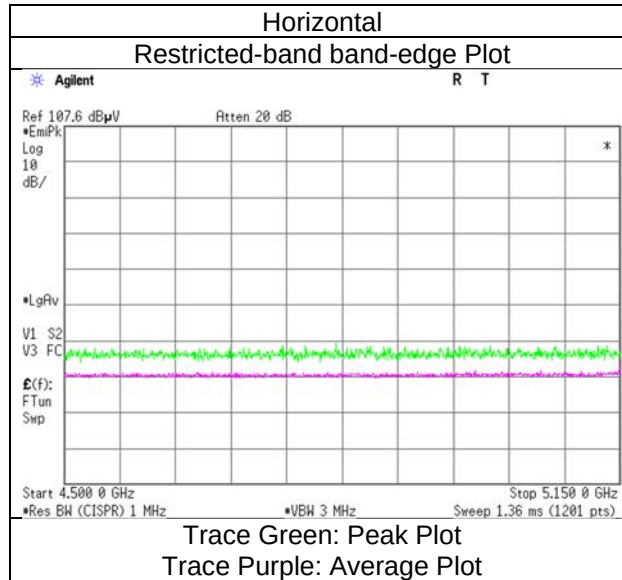

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5260 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10520.0	43.1	-	36.0	6.7	36.7	-	49.1	-	68.2	-	19.1	-	Floor noise
Hori.	15780.0	43.2	35.6	39.3	8.1	38.2	-	52.3	44.8	73.9	53.9	21.6	9.1	Floor noise
Hori.	36820.0	66.4	-	43.8	4.5	73.7	-	41.0	-	68.2	-	27.2	-	
Vert.	10520.0	43.1	-	36.0	6.7	36.7	-	49.1	-	68.2	-	19.1	-	Floor noise
Vert.	15780.0	43.2	35.6	39.3	8.1	38.2	-	52.3	44.8	73.9	53.9	21.6	9.1	Floor noise
Vert.	36820.0	67.1	-	43.8	4.5	73.7	-	41.7	-	68.2	-	26.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-20 5320 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	46.4	36.6	31.6	3.7	32.3	3.0	49.4	42.5	73.9	53.9	24.6	11.4	*1)
Hori.	10640.0	42.7	34.8	36.4	6.8	36.7	-	49.1	41.2	73.9	53.9	24.8	12.7	Floor noise
Hori.	15960.0	43.3	36.4	39.6	8.1	38.4	-	52.7	45.7	73.9	53.9	21.2	8.2	Floor noise
Hori.	37240.0	66.5	-	43.8	4.6	73.3	-	41.6	-	68.2	-	26.6	-	-
Vert.	5350.0	46.1	36.5	31.6	3.7	32.3	3.0	49.0	42.4	73.9	53.9	24.9	11.5	*1)
Vert.	10640.0	42.7	34.8	36.4	6.8	36.7	-	49.1	41.2	73.9	53.9	24.8	12.7	Floor noise
Vert.	15960.0	43.3	36.4	39.6	8.1	38.4	-	52.7	45.7	73.9	53.9	21.2	8.2	Floor noise
Vert.	37240.0	69.8	-	43.8	4.6	73.3	-	44.9	-	68.2	-	23.3	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-20 5320 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

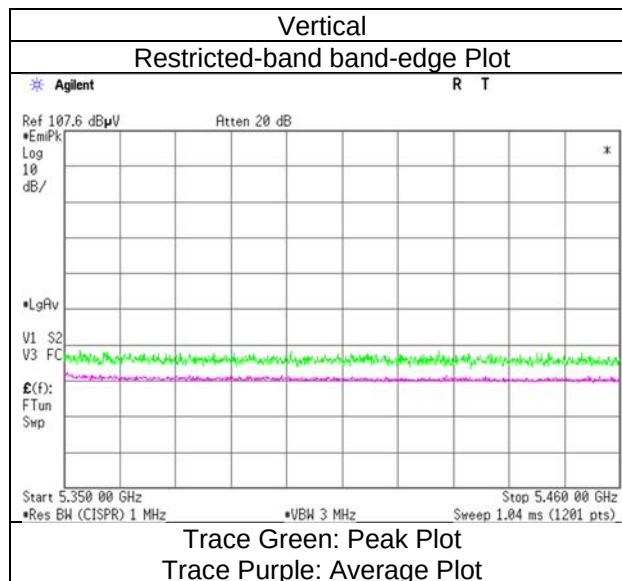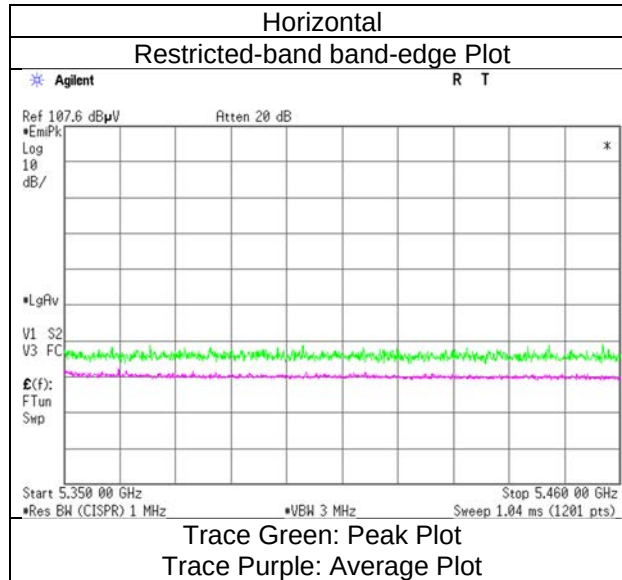

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5500 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5460.0	44.0	34.8	31.8	3.7	32.3	3.0	47.2	40.9	68.2	53.9	21.0	13.0	*1)
Hori.	5470.0	43.8	-	31.8	3.7	32.3	-	47.0	-	68.2	-	21.2	-	-
Hori.	11000.0	42.7	35.3	37.3	6.8	36.7	-	50.1	42.7	73.9	53.9	23.8	11.2	Floor noise
Hori.	16500.0	45.2	-	39.6	8.1	38.6	-	54.3	-	68.2	-	13.9	-	Floor noise
Hori.	38500.0	68.4	-	43.8	4.9	73.4	-	43.7	-	68.2	-	24.5	-	-
Vert.	5460.0	43.8	34.5	31.8	3.7	32.3	3.0	47.0	40.6	68.2	53.9	21.2	13.3	*1)
Vert.	5470.0	43.7	-	31.8	3.7	32.3	-	46.9	-	68.2	-	21.4	-	-
Vert.	11000.0	42.7	35.3	37.3	6.8	36.7	-	50.1	42.7	73.9	53.9	23.8	11.2	Floor noise
Vert.	16500.0	45.2	-	39.6	8.1	38.6	-	54.3	-	68.2	-	13.9	-	Floor noise
Vert.	38500.0	71.7	-	43.8	4.9	73.4	-	47.0	-	68.2	-	21.2	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5500 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

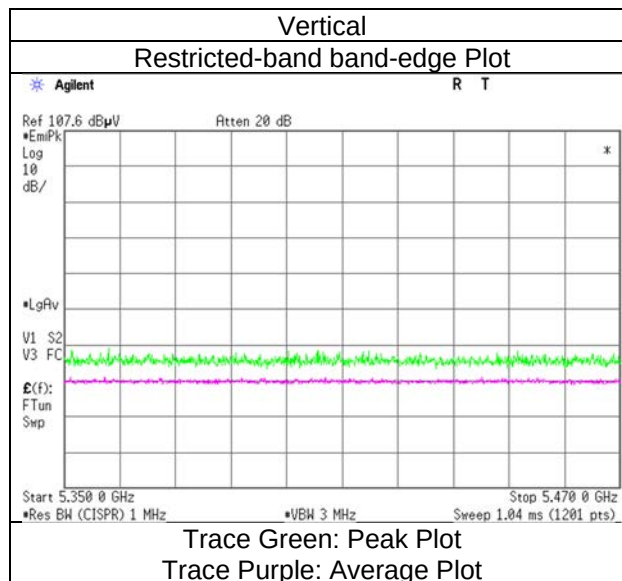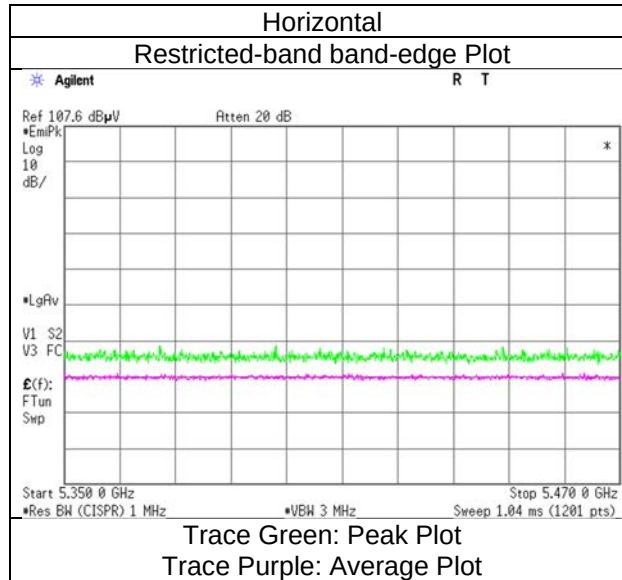

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5600 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11200.0	44.5	36.0	37.2	6.9	36.7	-	51.8	43.4	73.9	53.9	22.1	10.5	Floor noise
Hori.	16800.0	44.4	-	39.3	8.2	38.6	-	53.2	-	68.2	-	15.0	-	Floor noise
Hori.	39200.0	69.7	63.2	43.8	5.0	73.8	3.0	44.7	41.1	73.9	53.9	29.2	12.8	*2)
Vert.	11200.0	44.5	36.0	37.2	6.9	36.7	-	51.8	43.4	73.9	53.9	22.1	10.5	Floor noise
Vert.	16800.0	44.4	-	39.3	8.2	38.6	-	53.2	-	68.2	-	15.0	-	Floor noise
Vert.	39200.0	72.1	66.4	43.8	5.0	73.8	3.0	47.1	44.3	73.9	53.9	26.8	9.6	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5700 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	46.6	-	31.9	3.8	32.3	-	50.0	-	68.2	-	18.2	-	
Hori.	11400.0	42.9	35.6	37.3	6.9	36.7	-	50.4	43.1	73.9	53.9	23.6	10.8	Floor noise
Hori.	17100.0	43.5	-	39.5	8.2	38.6	-	52.6	-	68.2	-	15.6	-	Floor noise
Hori.	39900.0	68.0	60.6	44.0	5.2	73.3	3.0	43.8	39.4	73.9	53.9	30.1	14.6	*2)
Vert.	5725.0	46.5	-	31.9	3.8	32.3	-	49.9	-	68.2	-	18.3	-	
Vert.	11400.0	42.9	35.6	37.3	6.9	36.7	-	50.4	43.1	73.9	53.9	23.6	10.8	Floor noise
Vert.	17100.0	43.5	-	39.5	8.2	38.6	-	52.6	-	68.2	-	15.6	-	Floor noise
Vert.	39900.0	71.0	66.0	44.0	5.2	73.3	3.0	46.8	44.8	73.9	53.9	27.1	9.2	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-20 5700 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

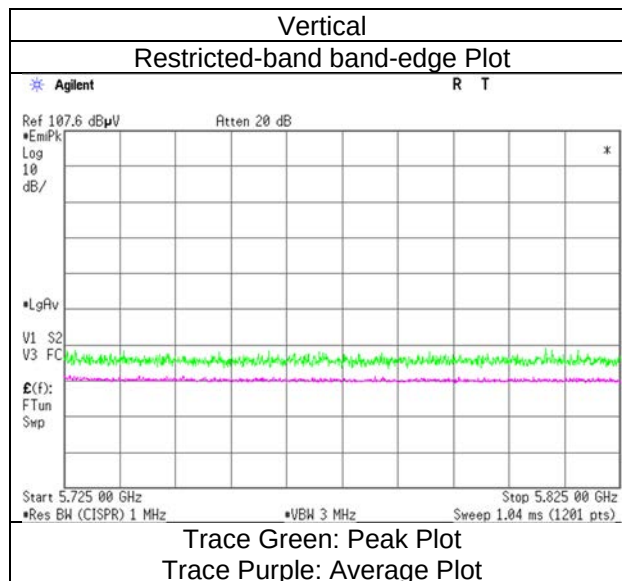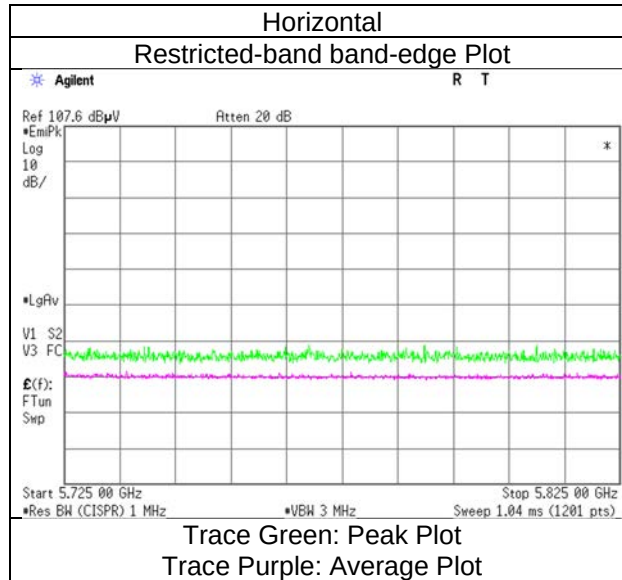

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5745 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	44.8	-	31.8	3.8	32.3	-	48.1	-	68.2	-	20.1	-	
Hori.	5700.0	46.5	-	31.9	3.8	32.3	-	49.9	-	105.2	-	55.4	-	
Hori.	5720.0	47.9	-	31.9	3.8	32.3	-	51.3	-	110.8	-	59.5	-	
Hori.	5725.0	49.7	-	31.9	3.8	32.3	-	53.1	-	122.2	-	69.1	-	
Hori.	11490.0	42.8	35.4	37.3	6.9	36.7	-	50.4	43.0	73.9	53.9	23.5	11.0	Floor noise
Hori.	17235.0	44.1	-	39.7	8.2	38.6	-	53.5	-	68.2	-	14.7	-	Floor noise
Vert.	5650.0	44.8	-	31.8	3.8	32.3	-	48.0	-	68.2	-	20.2	-	
Vert.	5700.0	46.3	-	31.9	3.8	32.3	-	49.7	-	105.2	-	55.5	-	
Vert.	5720.0	47.4	-	31.9	3.8	32.3	-	50.8	-	110.8	-	60.0	-	
Vert.	5725.0	49.5	-	31.9	3.8	32.3	-	52.9	-	122.2	-	69.3	-	
Vert.	11490.0	42.8	35.4	37.3	6.9	36.7	-	50.4	43.0	73.9	53.9	23.5	11.0	Floor noise
Vert.	17235.0	44.1	-	39.7	8.2	38.6	-	53.5	-	68.2	-	14.7	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5745 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

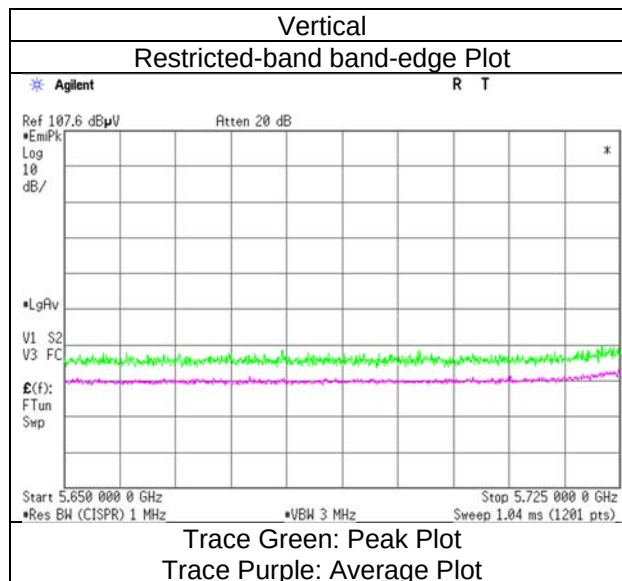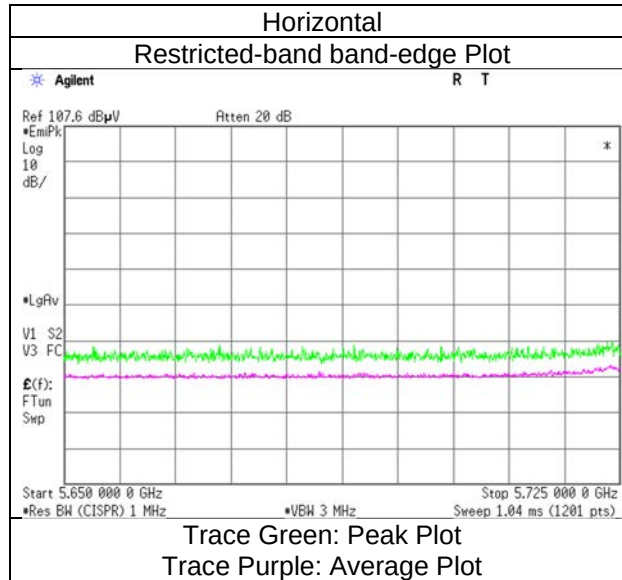

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 5785 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11570.0	43.1	35.5	37.3	6.9	36.7	-	50.6	43.0	73.9	53.9	23.3	10.9	Floor noise
Hori.	17355.0	43.5	-	39.9	8.2	38.6	-	53.0	-	68.2	-	15.2	-	Floor noise
Vert.	11570.0	43.1	35.5	37.3	6.9	36.7	-	50.6	43.0	73.9	53.9	23.3	10.9	Floor noise
Vert.	17355.0	43.5	-	39.9	8.2	38.6	-	53.0	-	68.2	-	15.2	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5825 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	46.0	-	32.3	3.9	32.3	-	49.8	-	122.2	-	72.4	-	
Hori.	5855.0	44.6	-	32.3	3.9	32.3	-	48.4	-	110.8	-	62.4	-	
Hori.	5875.0	44.2	-	32.3	3.9	32.3	-	48.1	-	105.2	-	57.1	-	
Hori.	5925.0	44.0	-	32.4	3.9	32.3	-	48.0	-	68.2	-	20.3	-	
Hori.	11650.0	42.7	35.9	37.3	7.0	36.7	-	50.3	43.4	73.9	53.9	23.6	10.5	Floor noise
Hori.	17475.0	43.5	-	40.0	8.3	38.6	-	53.1	-	68.2	-	15.1	-	Floor noise
Vert.	5850.0	45.8	-	32.3	3.9	32.3	-	49.6	-	122.2	-	72.6	-	
Vert.	5855.0	44.3	-	32.3	3.9	32.3	-	48.2	-	110.8	-	62.6	-	
Vert.	5875.0	44.1	-	32.3	3.9	32.3	-	48.0	-	105.2	-	57.2	-	
Vert.	5925.0	43.9	-	32.4	3.9	32.3	-	47.9	-	68.2	-	20.4	-	
Vert.	11650.0	42.7	35.9	37.3	7.0	36.7	-	50.3	43.4	73.9	53.9	23.6	10.5	Floor noise
Vert.	17475.0	43.5	-	40.0	8.3	38.6	-	53.1	-	68.2	-	15.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 5825 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

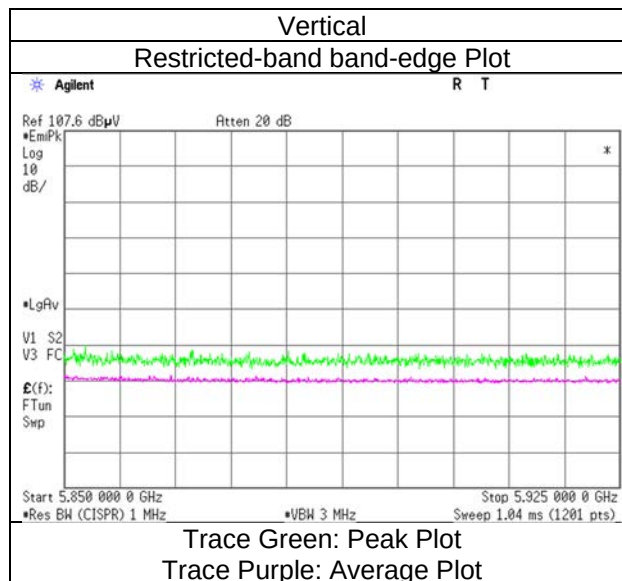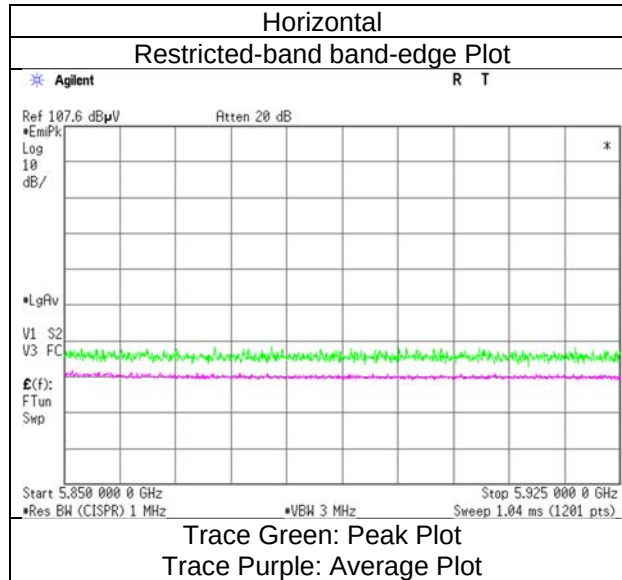

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 26 tone-RU Index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	45.0	35.6	31.9	3.6	32.4	-	48.0	38.7	73.9	53.9	25.9	15.2	
Vert.	5150.0	44.8	35.5	31.9	3.6	32.4	-	47.8	38.6	73.9	53.9	26.1	15.4	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 26 tone-RU Index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

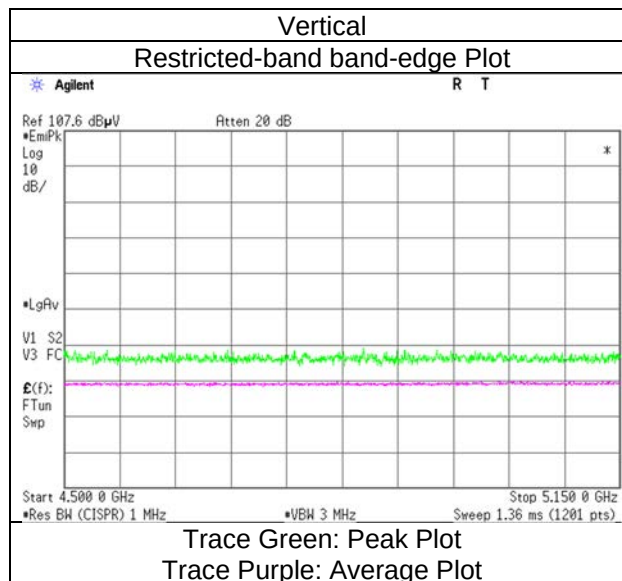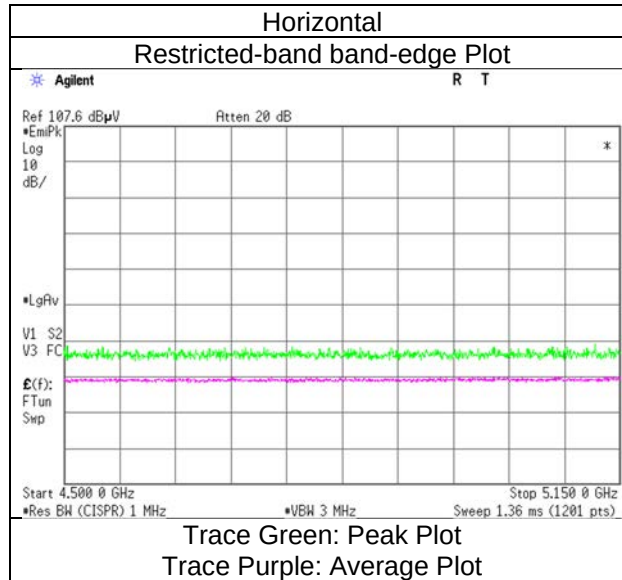

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 26 tone-RU Index 8
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	45.3	36.5	31.6	3.7	32.3	-	48.3	39.4	73.9	53.9	25.6	14.5	
Vert.	5350.0	44.4	36.4	31.6	3.7	32.3	-	47.3	39.4	73.9	53.9	26.6	14.6	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 26 tone-RU Index 8				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

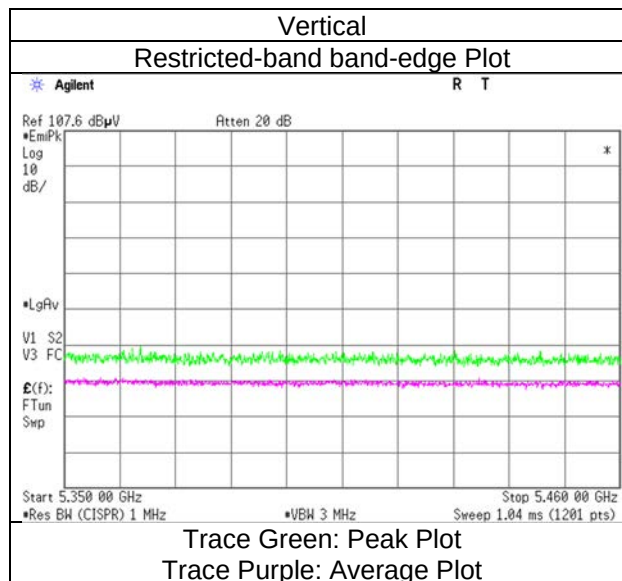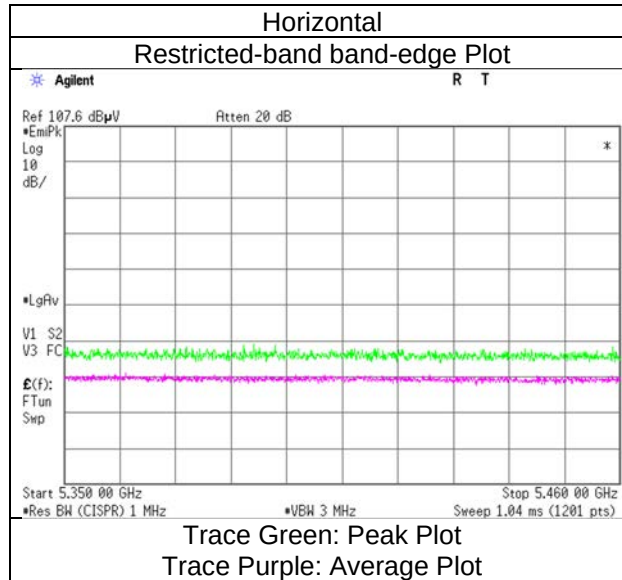

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 26 tone-RU Index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	44.5	35.7	31.8	3.7	32.3	-	47.7	38.9	68.2	53.9	20.5	15.0	
Hori.	5470.0	44.9	-	31.8	3.7	32.3	-	48.1	-	68.2	-	20.1	-	
Vert.	5460.0	44.5	35.8	31.8	3.7	32.3	-	47.6	39.0	68.2	53.9	20.6	14.9	
Vert.	5470.0	44.8	-	31.8	3.7	32.3	-	47.9	-	68.2	-	20.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 26 tone-RU Index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

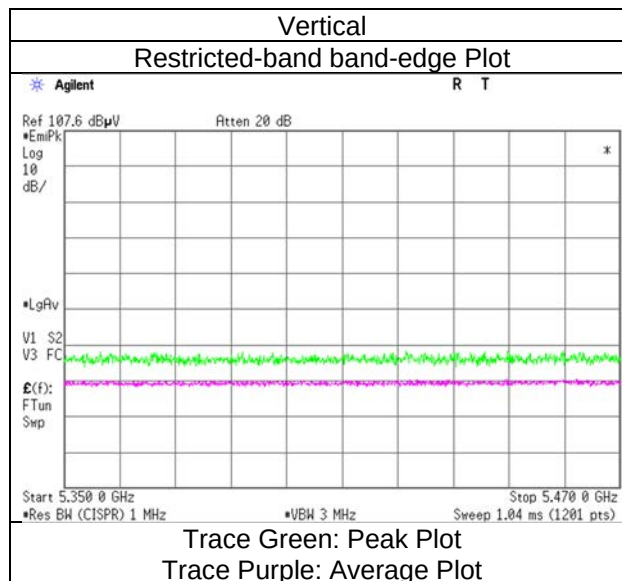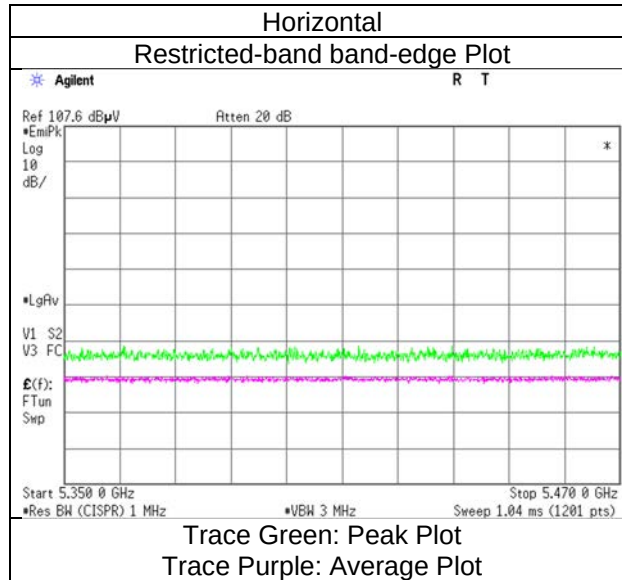

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 26 tone-RU index 8
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	44.9	-	32.5	3.7	31.1	-	50.1	-	68.2	-	18.1	-	
Vert.	5725.0	45.0	-	32.5	3.7	31.1	-	50.2	-	68.2	-	18.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 26 tone-RU index 8				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

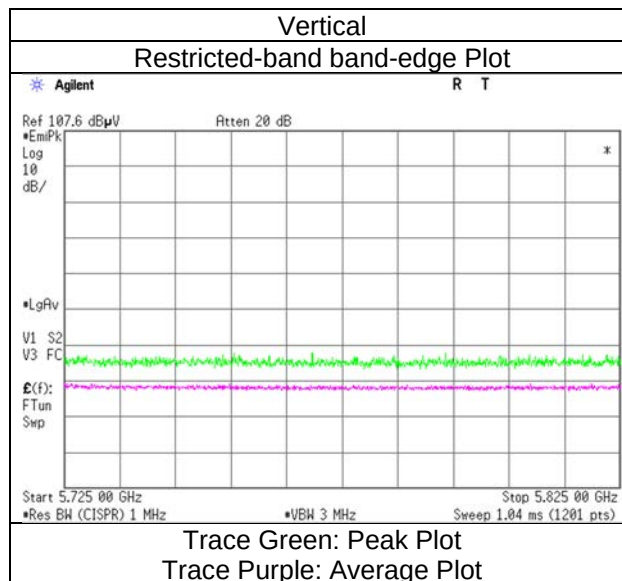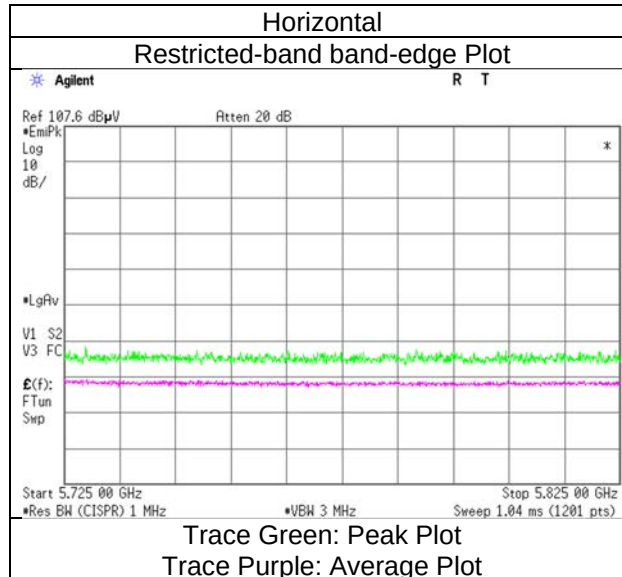

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.1	-	32.3	3.7	31.0	-	45.1	-	68.2	-	23.1	-	
Hori.	5700.0	41.4	-	32.5	3.7	31.1	-	46.5	-	105.2	-	58.7	-	
Hori.	5720.0	42.1	-	32.5	3.7	31.1	-	47.3	-	110.8	-	63.6	-	
Hori.	5725.0	43.5	-	32.5	3.7	31.1	-	48.6	-	122.2	-	73.6	-	
Vert.	5650.0	40.6	-	32.3	3.7	31.0	-	45.6	-	68.2	-	22.6	-	
Vert.	5700.0	41.4	-	32.5	3.7	31.1	-	46.5	-	105.2	-	58.7	-	
Vert.	5720.0	43.9	-	32.5	3.7	31.1	-	49.1	-	110.8	-	61.7	-	
Vert.	5725.0	44.0	-	32.5	3.7	31.1	-	49.2	-	122.2	-	73.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

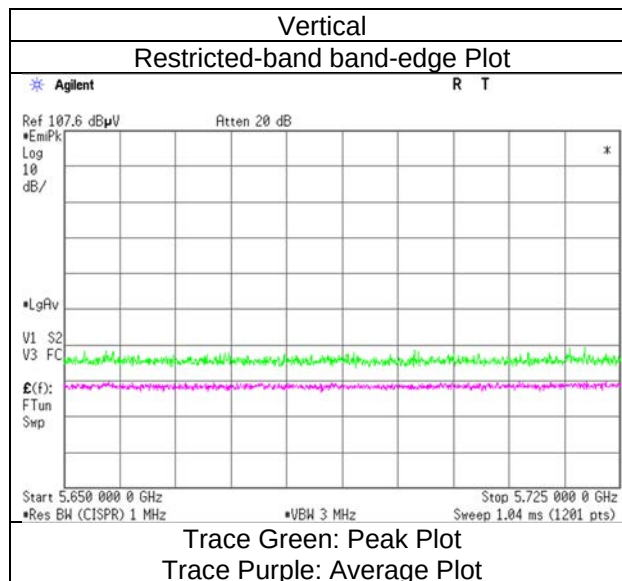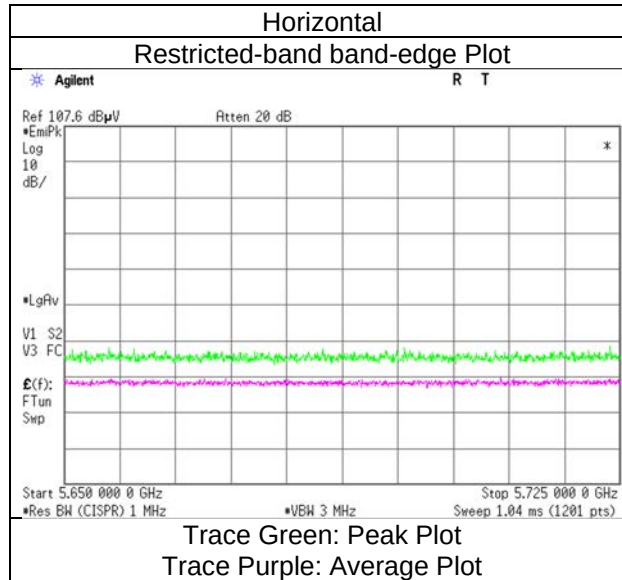

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 26 tone-RU index 8
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	42.2	-	32.8	3.8	31.1	-	47.6	-	122.2	-	74.6	-	
Hori.	5855.0	40.9	-	32.8	3.8	31.1	-	46.3	-	110.8	-	64.5	-	
Hori.	5875.0	40.6	-	32.8	3.8	31.1	-	46.1	-	105.2	-	59.2	-	
Hori.	5925.0	40.9	-	32.8	3.8	31.1	-	46.3	-	68.2	-	21.9	-	
Vert.	5850.0	44.7	-	32.8	3.8	31.1	-	50.1	-	122.2	-	72.1	-	
Vert.	5855.0	41.3	-	32.8	3.8	31.1	-	46.7	-	110.8	-	64.1	-	
Vert.	5875.0	41.0	-	32.8	3.8	31.1	-	46.5	-	105.2	-	58.8	-	
Vert.	5925.0	40.5	-	32.8	3.8	31.1	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 26 tone-RU index 8				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

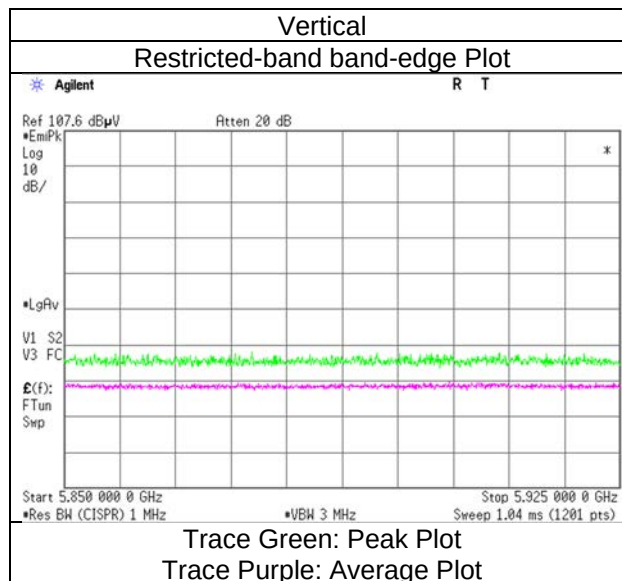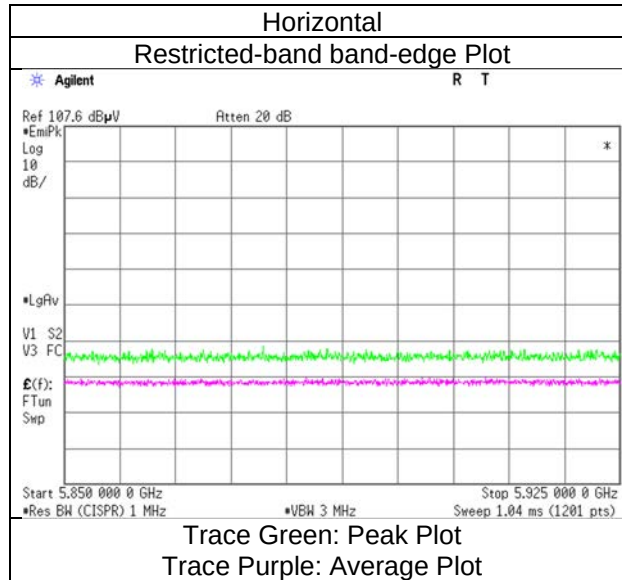

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	44.4	36.2	31.9	3.6	32.4	-	47.5	39.3	73.9	53.9	26.4	14.6	
Vert.	5150.0	44.2	36.1	31.9	3.6	32.4	-	47.3	39.2	73.9	53.9	26.6	14.8	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

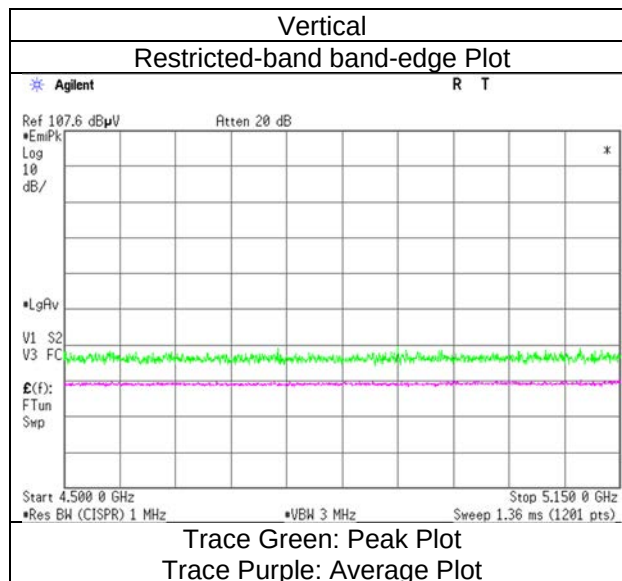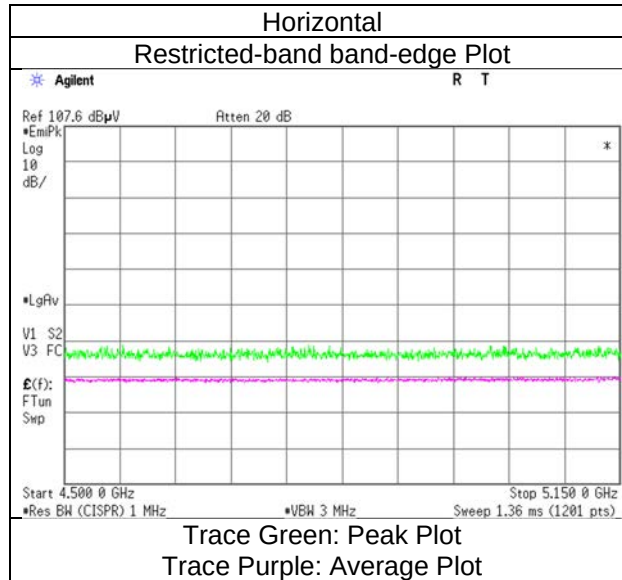

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 52 tone-RU index 40
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	45.2	36.7	31.6	3.7	32.3	-	48.2	39.6	73.9	53.9	25.7	14.3	
Vert.	5350.0	45.2	36.7	31.6	3.7	32.3	-	48.1	39.6	73.9	53.9	25.8	14.3	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 52 tone-RU index 40				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

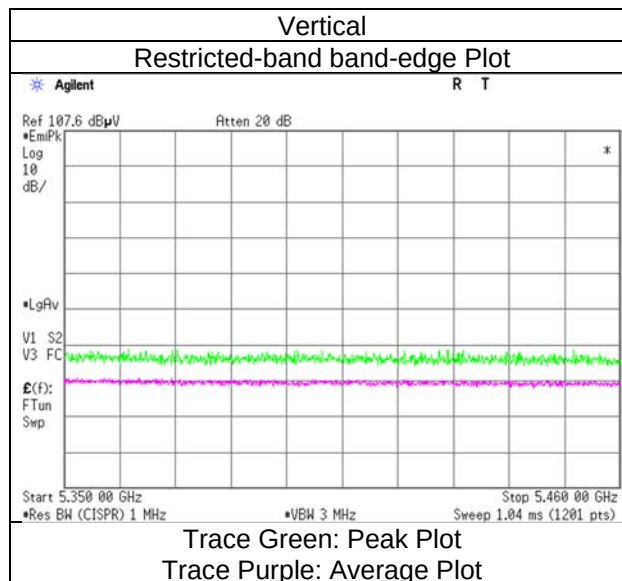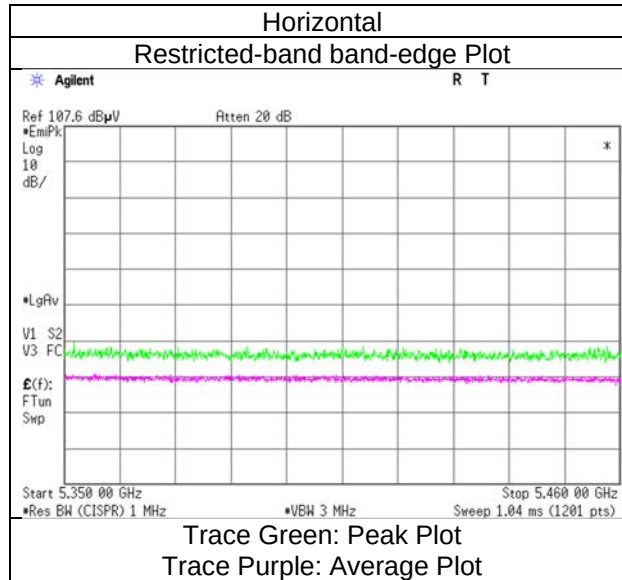

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	44.4	35.5	31.8	3.7	32.3	-	47.6	38.6	68.2	53.9	20.6	15.3	
Hori.	5470.0	45.9	-	31.8	3.7	32.3	-	49.1	-	68.2	-	19.1	-	
Vert.	5460.0	44.6	35.9	31.8	3.7	32.3	-	47.7	39.1	68.2	53.9	20.5	14.8	
Vert.	5470.0	45.2	-	31.8	3.7	32.3	-	48.4	-	68.2	-	19.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

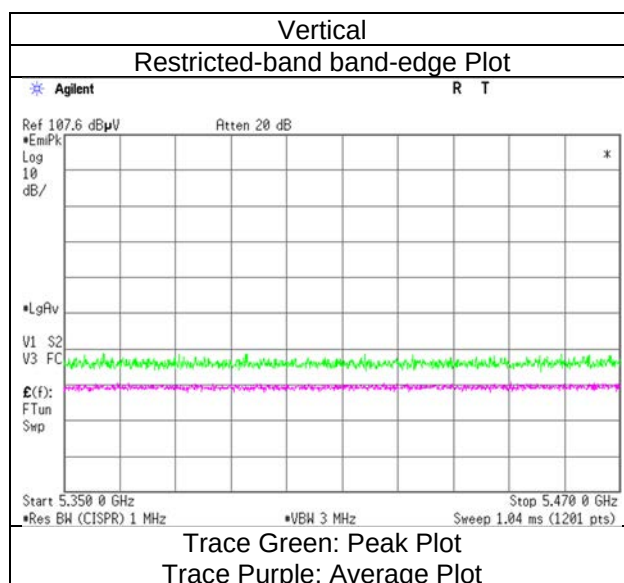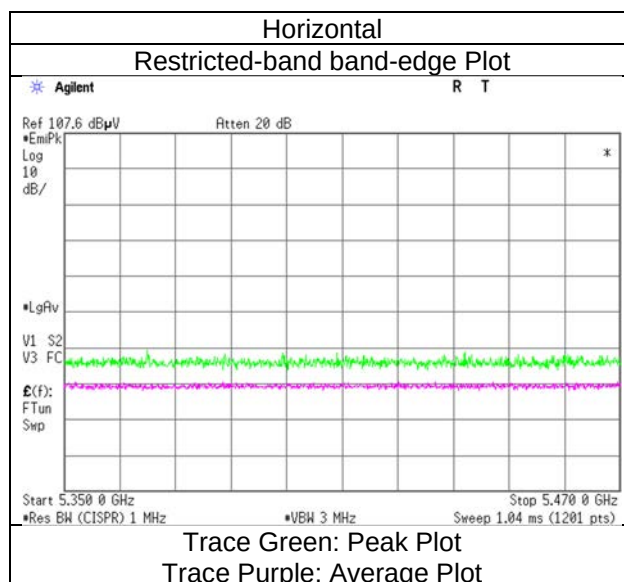

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 52 tone-RU index 40
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	44.7	-	32.5	3.7	31.1	-	49.8	-	68.2	-	18.4	-	
Vert.	5725.0	45.1	-	32.5	3.7	31.1	-	50.3	-	68.2	-	17.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 52 tone-RU index 40				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

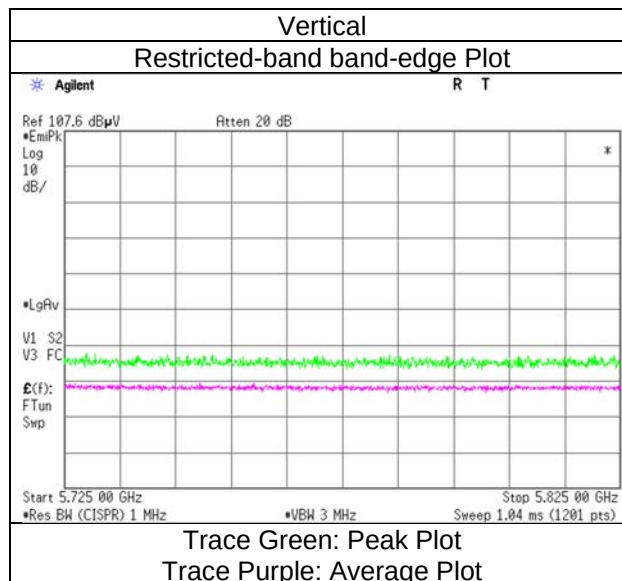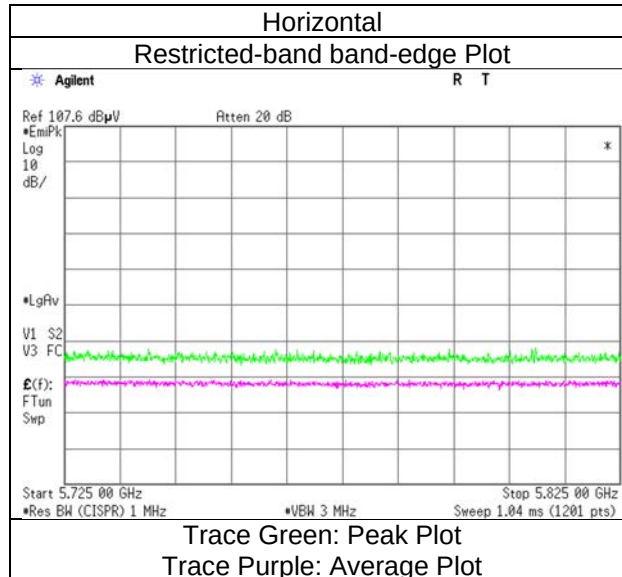

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.3	-	32.3	3.7	31.0	-	45.3	-	68.2	-	22.9	-	
Hori.	5700.0	40.8	-	32.5	3.7	31.1	-	45.9	-	105.2	-	59.3	-	
Hori.	5720.0	42.3	-	32.5	3.7	31.1	-	47.4	-	110.8	-	63.4	-	
Hori.	5725.0	44.6	-	32.5	3.7	31.1	-	49.8	-	122.2	-	72.4	-	
Vert.	5650.0	40.9	-	32.3	3.7	31.0	-	45.9	-	68.2	-	22.3	-	
Vert.	5700.0	41.7	-	32.5	3.7	31.1	-	46.8	-	105.2	-	58.4	-	
Vert.	5720.0	43.1	-	32.5	3.7	31.1	-	48.2	-	110.8	-	62.6	-	
Vert.	5725.0	43.6	-	32.5	3.7	31.1	-	48.8	-	122.2	-	73.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

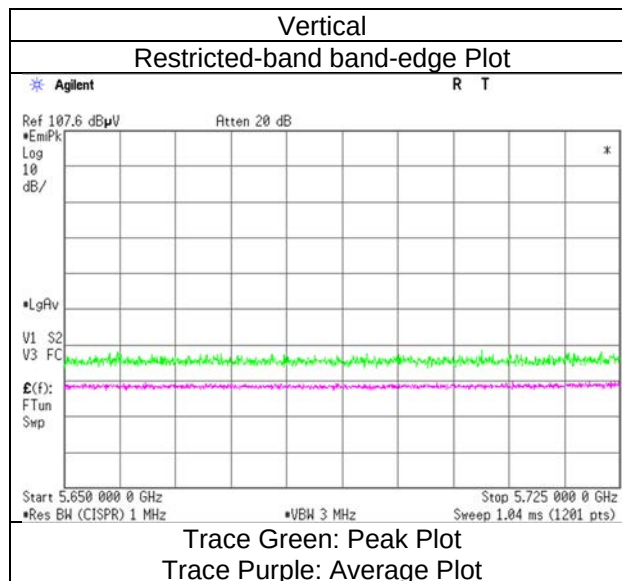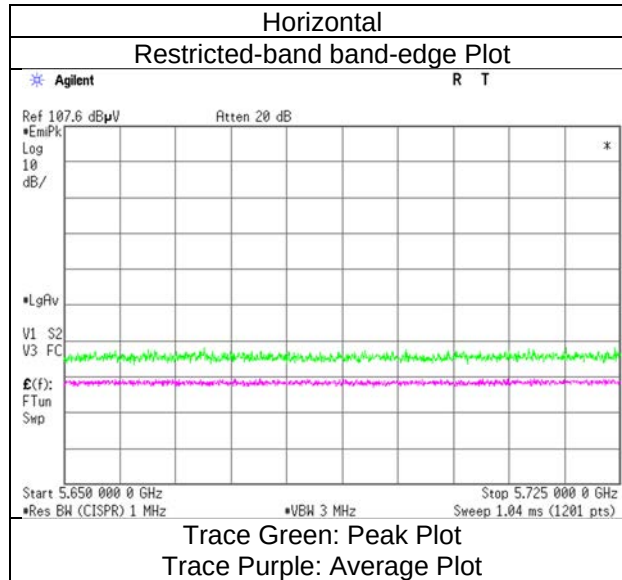

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 52 tone-RU index 40
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	41.2	-	32.8	3.8	31.1	-	46.7	-	122.2	-	75.5	-	
Hori.	5855.0	41.2	-	32.8	3.8	31.1	-	46.6	-	110.8	-	64.2	-	
Hori.	5875.0	40.6	-	32.8	3.8	31.1	-	46.1	-	105.2	-	59.1	-	
Hori.	5925.0	40.3	-	32.8	3.8	31.1	-	45.8	-	68.2	-	22.4	-	
Vert.	5850.0	43.0	-	32.8	3.8	31.1	-	48.4	-	122.2	-	73.8	-	
Vert.	5855.0	41.2	-	32.8	3.8	31.1	-	46.7	-	110.8	-	64.1	-	
Vert.	5875.0	41.1	-	32.8	3.8	31.1	-	46.5	-	105.2	-	58.7	-	
Vert.	5925.0	41.2	-	32.8	3.8	31.1	-	46.7	-	68.2	-	21.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 52 tone-RU index 40				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

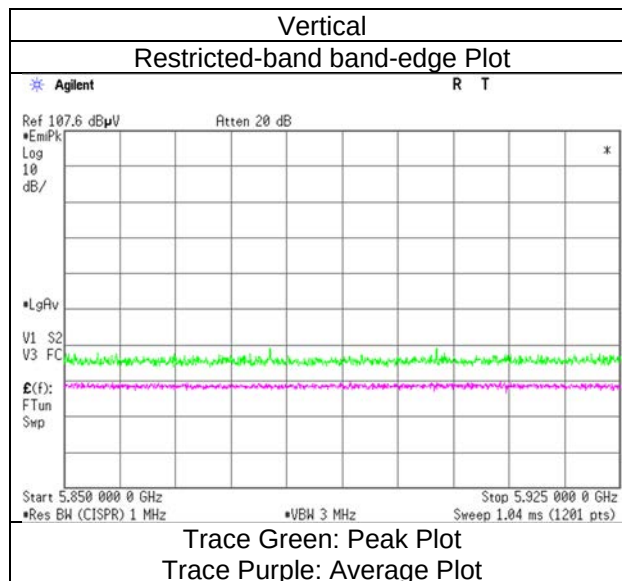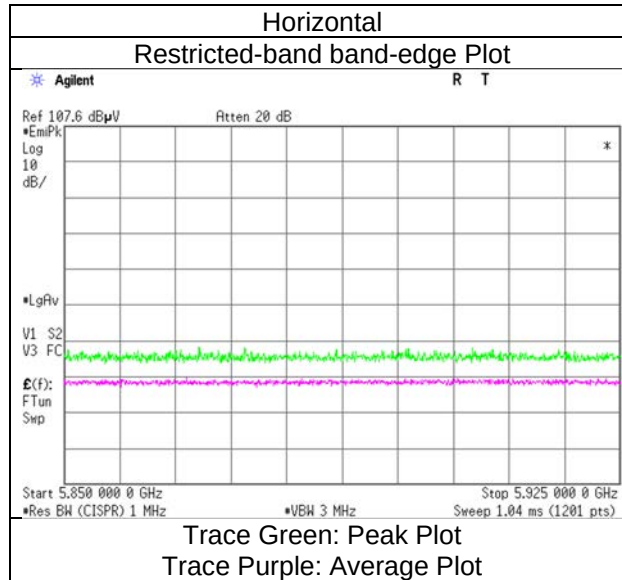

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 106 tone-RU index 53
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	45.3	36.5	31.9	3.6	32.4	-	48.3	39.5	73.9	53.9	25.6	14.4	
Vert.	5150.0	44.9	36.3	31.9	3.6	32.4	-	48.0	39.4	73.9	53.9	26.0	14.5	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 106 tone-RU index 53				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

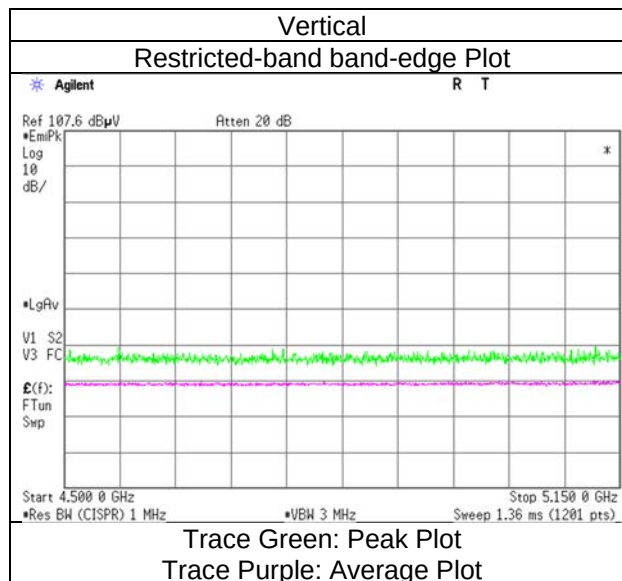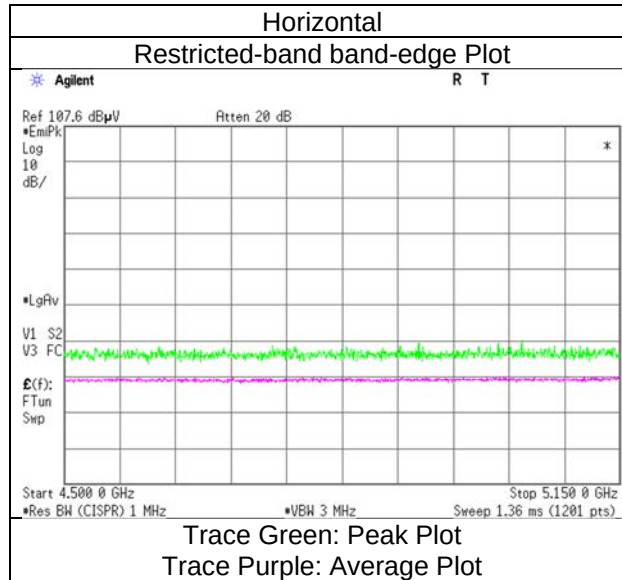

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 106 tone-RU index 54
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	45.2	36.7	31.6	3.7	32.3	-	48.2	39.7	73.9	53.9	25.7	14.3	
Vert.	5350.0	45.6	37.0	31.6	3.7	32.3	-	48.6	39.9	73.9	53.9	25.3	14.0	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 106 tone-RU index 54				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

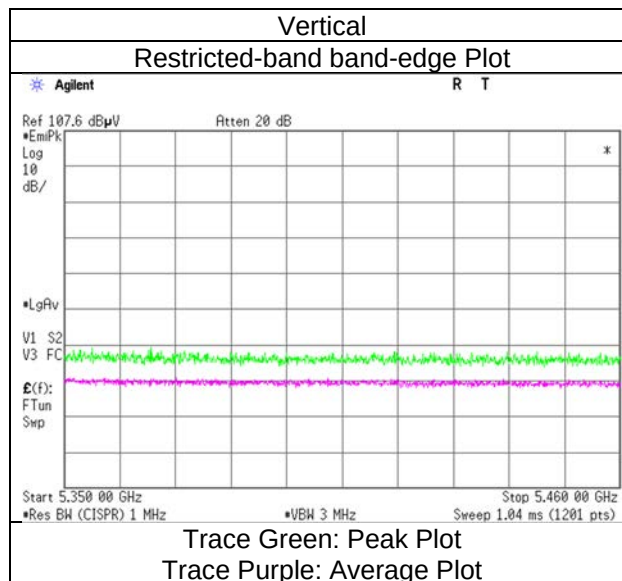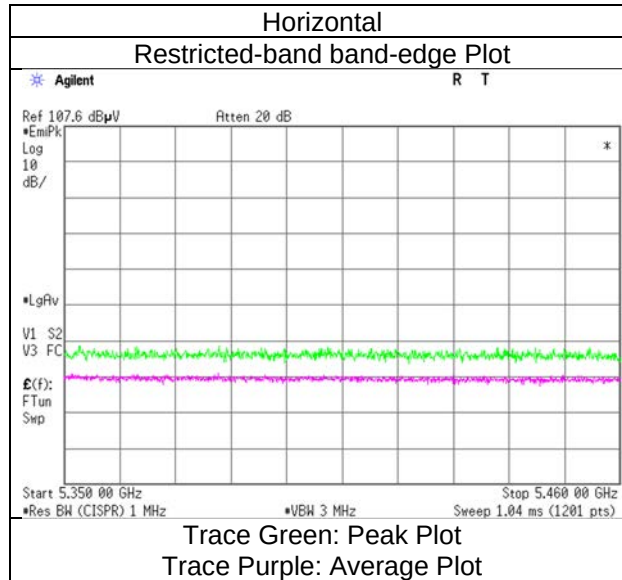

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 106 tone-RU index 37
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	44.5	35.6	31.8	3.7	32.3	-	47.7	38.7	68.2	53.9	20.5	15.2	
Hori.	5470.0	44.6	-	31.8	3.7	32.3	-	47.8	-	68.2	-	20.4	-	
Vert.	5460.0	44.0	35.8	31.8	3.7	32.3	-	47.2	39.0	68.2	53.9	21.0	14.9	
Vert.	5470.0	44.9	-	31.8	3.7	32.3	-	48.1	-	68.2	-	20.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 106 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

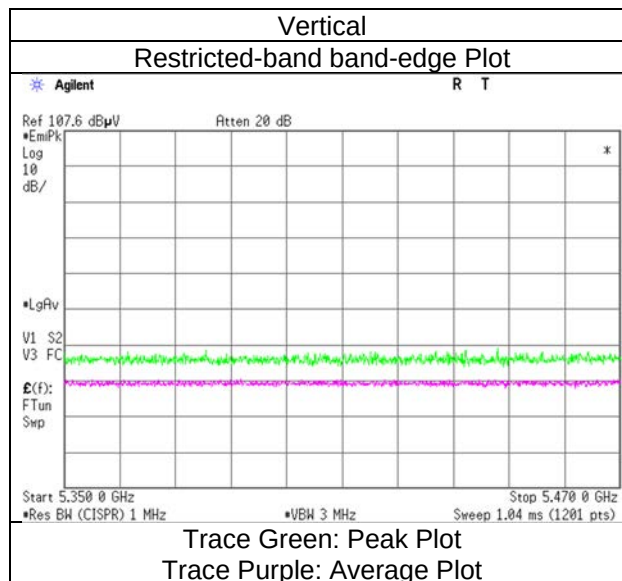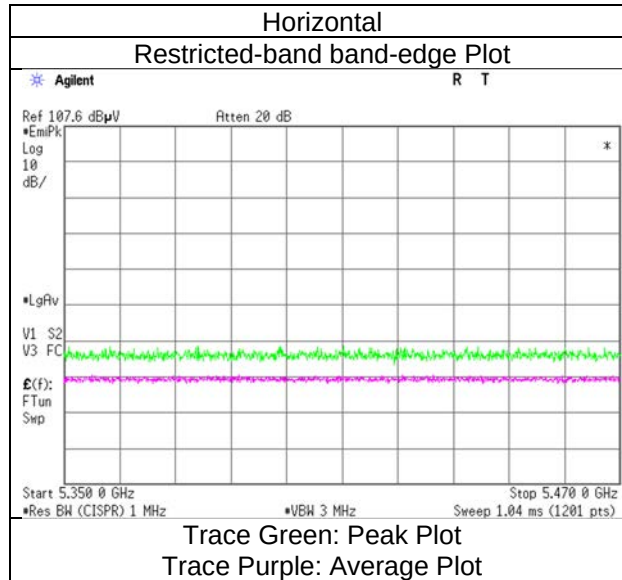

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 106 tone-RU index 40
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5725.0	45.1	-	32.5	3.7	31.1	-	50.3	-	68.2	-	17.9	-	
Vert.	5725.0	45.5	-	32.5	3.7	31.1	-	50.7	-	68.2	-	17.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 106 tone-RU index 40				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

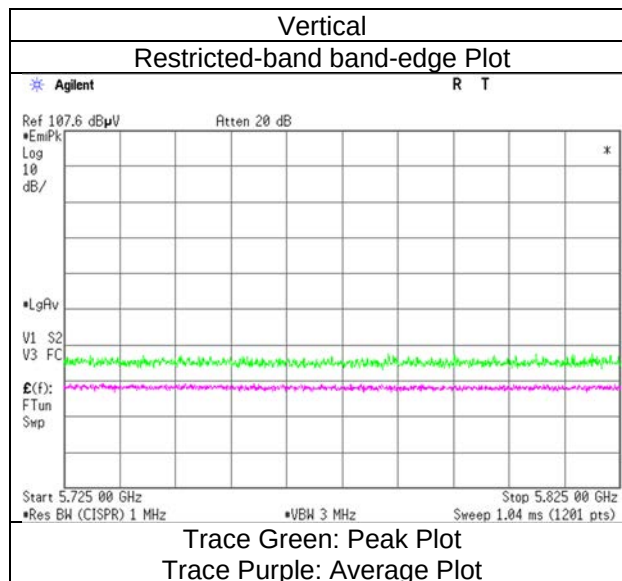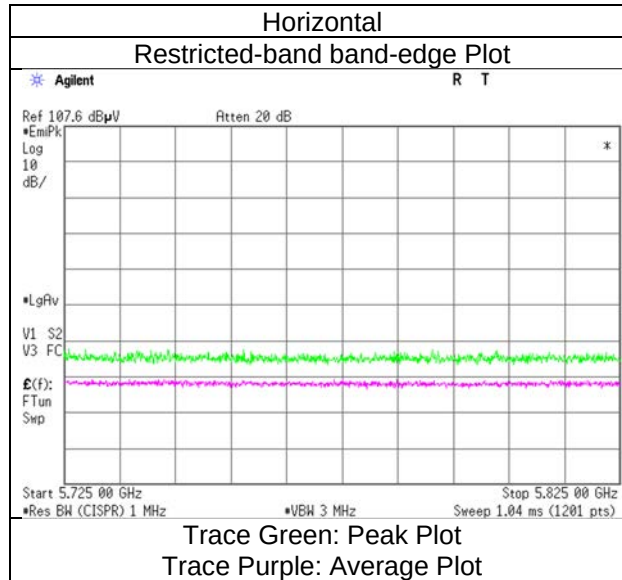

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 106 tone-RU index 53
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.5	-	32.3	3.7	31.0	-	45.5	-	68.2	-	22.7	-	
Hori.	5700.0	41.1	-	32.5	3.7	31.1	-	46.2	-	105.2	-	59.0	-	
Hori.	5720.0	41.9	-	32.5	3.7	31.1	-	47.0	-	110.8	-	63.8	-	
Hori.	5725.0	43.7	-	32.5	3.7	31.1	-	48.9	-	122.2	-	73.3	-	
Vert.	5650.0	40.9	-	32.3	3.7	31.0	-	45.8	-	68.2	-	22.4	-	
Vert.	5700.0	41.1	-	32.5	3.7	31.1	-	46.3	-	105.2	-	59.0	-	
Vert.	5720.0	42.3	-	32.5	3.7	31.1	-	47.5	-	110.8	-	63.3	-	
Vert.	5725.0	43.5	-	32.5	3.7	31.1	-	48.7	-	122.2	-	73.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 106 tone-RU index 53				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

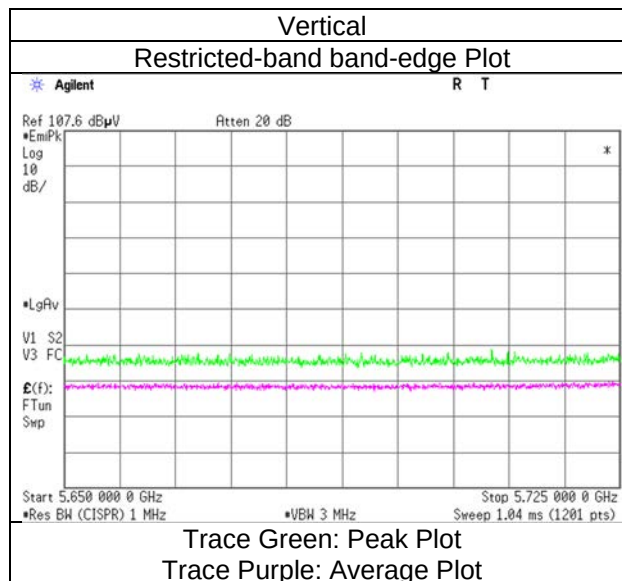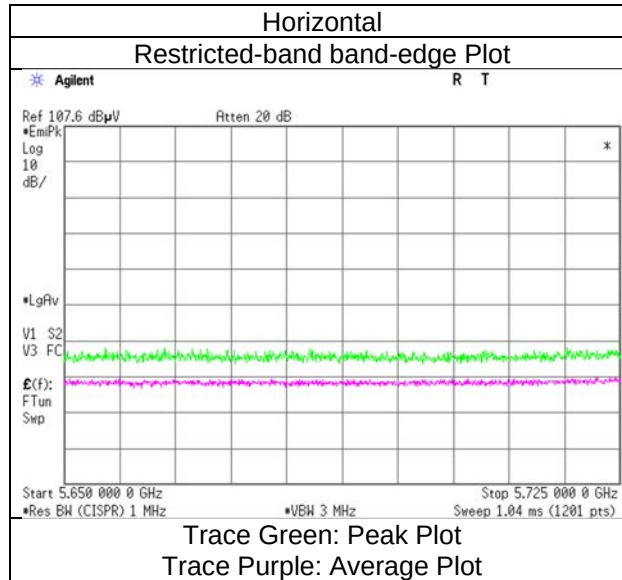

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 106 tone-RU index 54
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	42.1	-	32.8	3.8	31.1	-	47.6	-	122.2	-	74.6	-	
Hori.	5855.0	41.7	-	32.8	3.8	31.1	-	47.2	-	110.8	-	63.6	-	
Hori.	5875.0	40.4	-	32.8	3.8	31.1	-	45.8	-	105.2	-	59.4	-	
Hori.	5925.0	41.3	-	32.8	3.8	31.1	-	46.8	-	68.2	-	21.5	-	
Vert.	5850.0	42.2	-	32.8	3.8	31.1	-	47.6	-	122.2	-	74.6	-	
Vert.	5855.0	41.3	-	32.8	3.8	31.1	-	46.7	-	110.8	-	64.1	-	
Vert.	5875.0	41.1	-	32.8	3.8	31.1	-	46.5	-	105.2	-	58.7	-	
Vert.	5925.0	40.7	-	32.8	3.8	31.1	-	46.2	-	68.2	-	22.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 106 tone-RU index 54				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

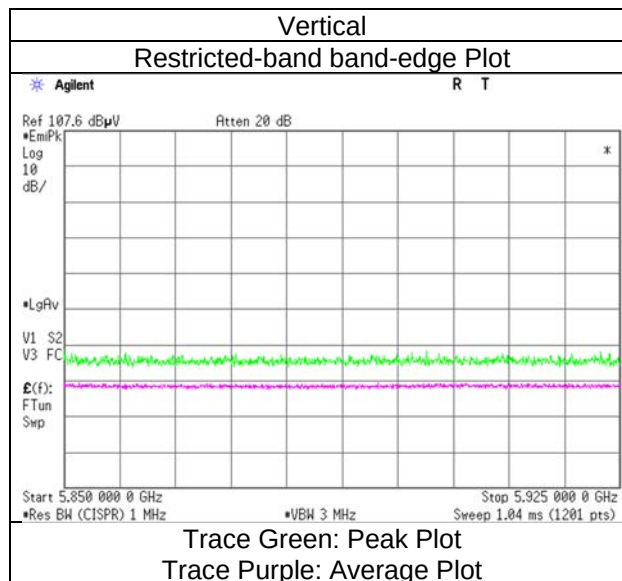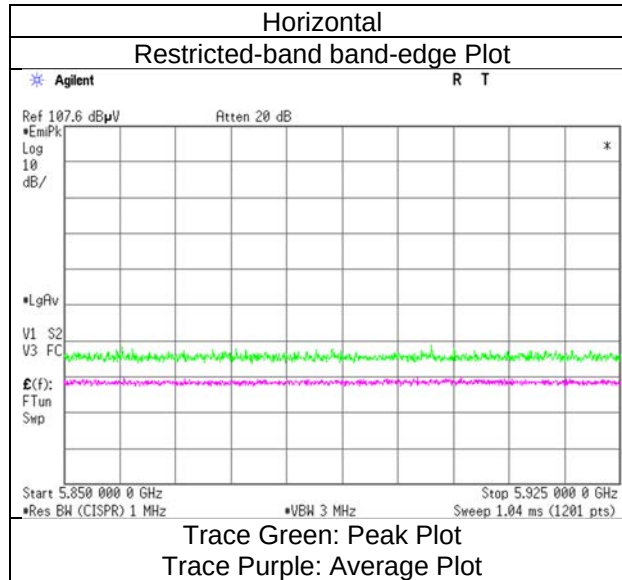

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	46.1	37.0	31.9	3.6	32.4	-	49.1	40.0	73.9	53.9	24.8	13.9	
Hori.	10360.0	43.6	-	35.9	5.5	36.8	-	48.2	-	68.2	-	20.0	-	Floor noise
Hori.	15540.0	44.9	36.8	39.0	6.7	38.1	-	52.5	44.4	73.9	53.9	21.4	9.5	Floor noise
Hori.	36260.0	66.6	-	43.6	4.4	74.4	-	40.2	-	68.2	-	28.0	-	
Vert.	5150.0	46.0	36.7	31.9	3.6	32.4	-	49.1	39.8	73.9	53.9	24.9	14.2	
Vert.	10360.0	43.6	-	35.9	5.5	36.8	-	48.2	-	68.2	-	20.0	-	Floor noise
Vert.	15540.0	45.4	36.8	39.0	6.7	38.1	-	53.0	44.4	73.9	53.9	20.9	9.5	Floor noise
Vert.	36260.0	68.0	-	43.6	4.4	74.4	-	41.6	-	68.2	-	26.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5180 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz

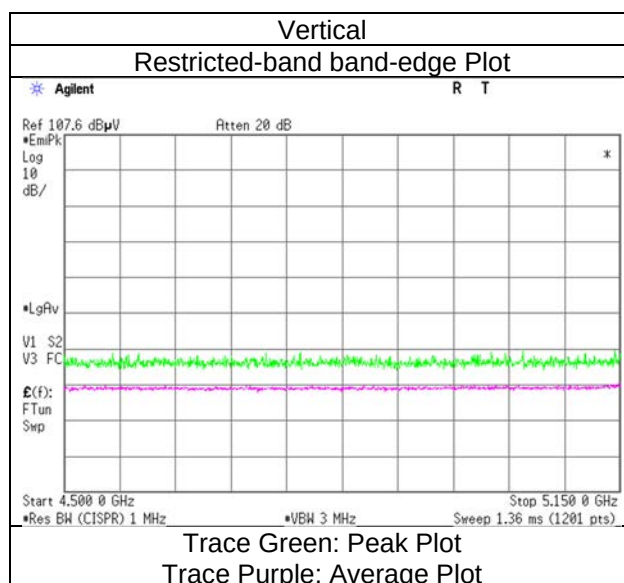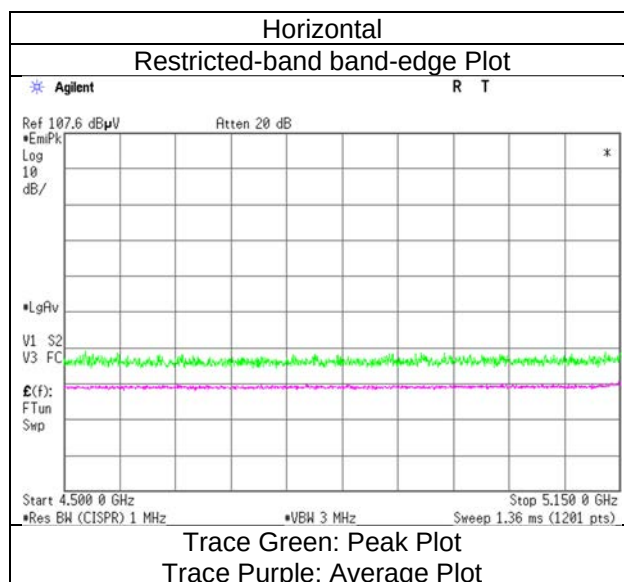

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5260 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	23 deg. C	49 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10520.0	43.0	-	36.0	5.5	36.7	-	47.7	-	68.2	-	20.5	-	Floor noise
Hori.	15780.0	43.4	36.3	39.3	6.7	38.2	-	51.2	44.1	73.9	53.9	22.7	9.8	Floor noise
Hori.	36820.0	66.1	-	43.8	4.5	73.7	-	40.7	-	68.2	-	27.5	-	
Vert.	10520.0	42.8	-	36.0	5.5	36.7	-	47.5	-	68.2	-	20.7	-	Floor noise
Vert.	15780.0	43.6	36.3	39.3	6.7	38.2	-	51.4	44.1	73.9	53.9	22.5	9.8	Floor noise
Vert.	36820.0	67.4	-	43.8	4.5	73.7	-	42.0	-	68.2	-	26.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	45.3	37.0	31.6	3.7	32.3	-	48.3	40.0	73.9	53.9	25.6	13.9	
Hori.	10640.0	42.0	35.3	36.4	5.5	36.7	-	47.2	40.5	73.9	53.9	26.8	13.5	Floor noise
Hori.	15960.0	44.0	36.1	39.6	6.8	38.4	-	52.0	44.1	73.9	53.9	21.9	9.8	Floor noise
Hori.	37240.0	66.7	-	43.8	4.6	73.3	-	41.8	-	68.2	-	26.4	-	
Vert.	5350.0	46.5	37.4	31.6	3.7	32.3	-	49.4	40.3	73.9	53.9	24.5	13.6	
Vert.	10640.0	41.9	35.3	36.4	5.5	36.7	-	47.1	40.5	73.9	53.9	26.9	13.5	Floor noise
Vert.	15960.0	43.6	36.1	39.6	6.8	38.4	-	51.6	44.1	73.9	53.9	22.3	9.8	Floor noise
Vert.	37240.0	69.7	-	43.8	4.6	73.3	-	44.8	-	68.2	-	23.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5320 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

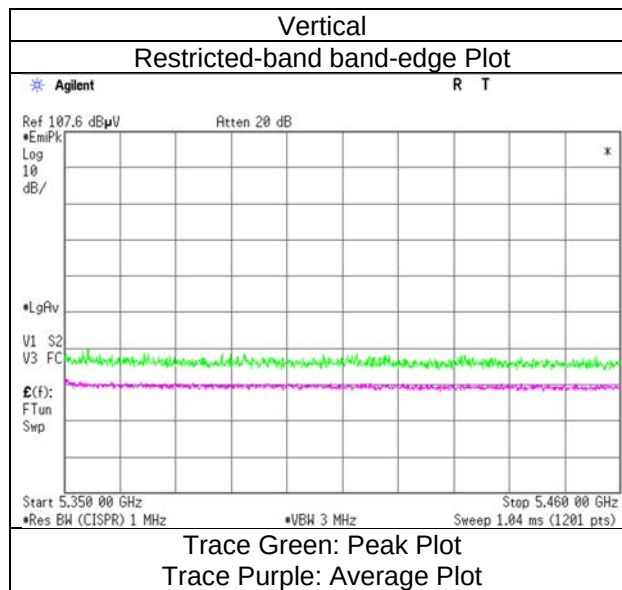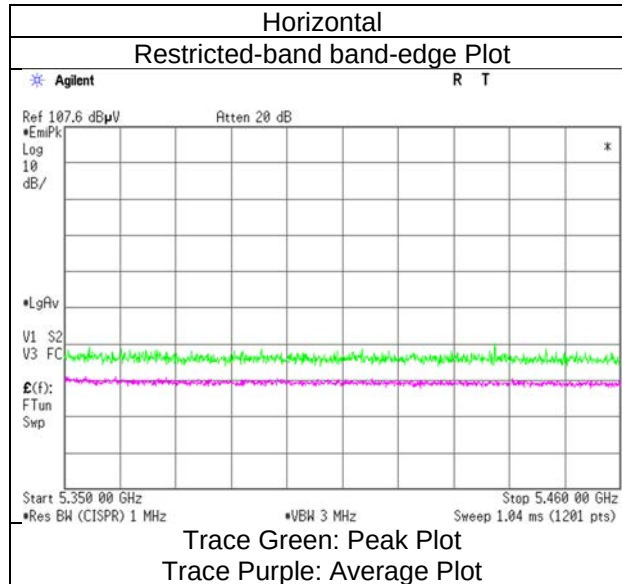

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	45.0	35.3	31.8	3.7	32.3	-	48.2	38.5	68.2	53.9	20.0	15.4	
Hori.	5470.0	44.2	-	31.8	3.7	32.3	-	47.4	-	68.2	-	20.8	-	
Hori.	11000.0	45.1	37.5	37.3	5.6	36.7	-	51.3	43.7	73.9	53.9	22.6	10.2	Floor noise
Hori.	16500.0	45.0	-	39.6	7.0	38.6	-	53.0	-	68.2	-	15.2	-	Floor noise
Hori.	38500.0	68.6	-	43.8	4.9	73.4	-	43.9	-	68.2	-	24.3	-	
Vert.	5460.0	43.8	35.7	31.8	3.7	32.3	-	47.0	38.8	68.2	53.9	21.2	15.1	
Vert.	5470.0	44.2	-	31.8	3.7	32.3	-	47.4	-	68.2	-	20.9	-	
Vert.	11000.0	44.9	37.1	37.3	5.6	36.7	-	51.1	43.3	73.9	53.9	22.8	10.6	Floor noise
Vert.	16500.0	44.1	-	39.6	7.0	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Vert.	38500.0	71.7	-	43.8	4.9	73.4	-	47.0	-	68.2	-	21.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5500 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

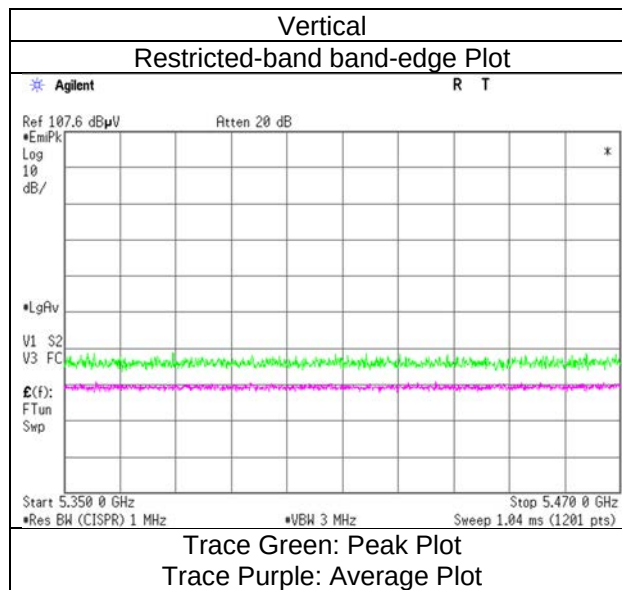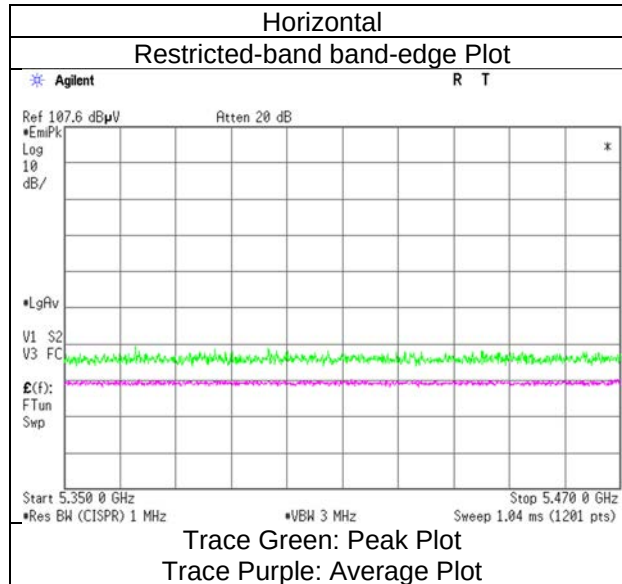

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5600 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 25, 2026	SAC2	21 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11200.0	43.1	34.6	37.2	5.7	36.7	-	49.2	40.7	73.9	53.9	24.7	13.2	Floor noise
Hori.	16800.0	43.4	-	39.3	7.1	38.6	-	51.2	-	68.2	-	17.1	-	Floor noise
Hori.	39200.0	69.6	64.7	43.8	5.0	73.8	-	44.6	39.7	73.9	53.9	29.3	14.2	
Vert.	11200.0	43.0	34.6	37.2	5.7	36.7	-	49.2	40.7	73.9	53.9	24.8	13.2	Floor noise
Vert.	16800.0	43.0	-	39.3	7.1	38.6	-	50.8	-	68.2	-	17.5	-	Floor noise
Vert.	39200.0	72.1	68.3	43.8	5.0	73.8	-	47.1	43.3	73.9	53.9	26.8	10.6	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	46.1	-	32.5	3.7	31.1	-	51.3	-	68.2	-	16.9	-	
Hori.	11400.0	42.8	34.8	37.3	5.7	36.7	-	49.1	41.1	73.9	53.9	24.8	12.8	Floor noise
Hori.	17100.0	44.7	-	39.5	7.2	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise
Hori.	39900.0	68.2	62.0	44.0	5.2	73.3	-	44.0	37.8	73.9	53.9	29.9	16.1	
Vert.	5725.0	46.5	-	32.5	3.7	31.1	-	51.7	-	68.2	-	16.5	-	
Vert.	11400.0	42.5	34.7	37.3	5.7	36.7	-	49.8	41.0	73.9	53.9	25.1	12.9	Floor noise
Vert.	17100.0	44.5	-	39.5	7.2	38.6	-	52.6	-	68.2	-	15.6	-	Floor noise
Vert.	39900.0	71.0	67.2	44.0	5.2	73.3	-	46.8	43.0	73.9	53.9	27.1	10.9	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5700 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	24 deg. C	42 % RH	Takumi Nishida	1 GHz to 10 GHz

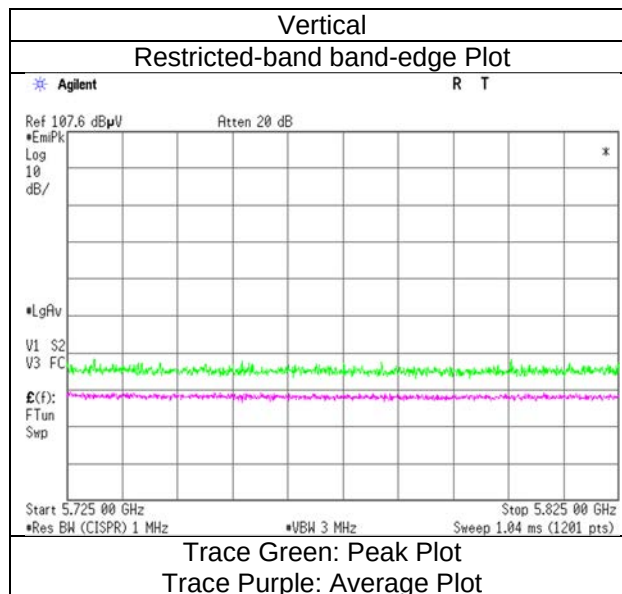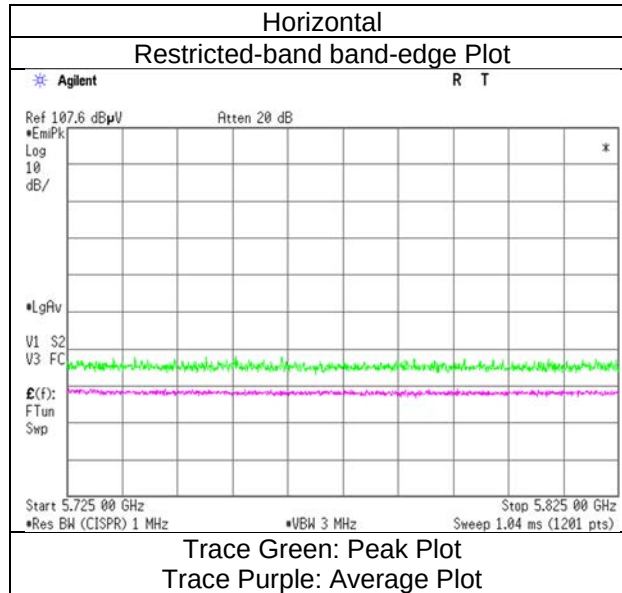

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.2	-	32.3	3.7	31.0	-	45.2	-	68.2	-	23.0	-	
Hori.	5700.0	40.4	-	32.5	3.7	31.1	-	45.5	-	105.2	-	59.7	-	
Hori.	5720.0	42.9	-	32.5	3.7	31.1	-	48.1	-	110.8	-	62.8	-	
Hori.	5725.0	44.4	-	32.5	3.7	31.1	-	49.6	-	122.2	-	72.6	-	
Hori.	11490.0	42.7	35.1	37.3	5.8	36.7	-	49.1	41.5	73.9	53.9	24.8	12.4	Floor noise
Hori.	17235.0	45.4	-	39.7	7.2	38.6	-	53.7	-	68.2	-	14.5	-	Floor noise
Vert.	5650.0	41.1	-	32.3	3.7	31.0	-	46.0	-	68.2	-	22.2	-	
Vert.	5700.0	41.8	-	32.5	3.7	31.1	-	46.9	-	105.2	-	58.3	-	
Vert.	5720.0	43.2	-	32.5	3.7	31.1	-	48.4	-	110.8	-	62.4	-	
Vert.	5725.0	44.9	-	32.5	3.7	31.1	-	50.1	-	122.2	-	72.1	-	
Vert.	11490.0	42.7	35.0	37.3	5.8	36.7	-	49.1	41.4	73.9	53.9	24.8	12.5	Floor noise
Vert.	17235.0	45.6	-	39.7	7.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5745 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

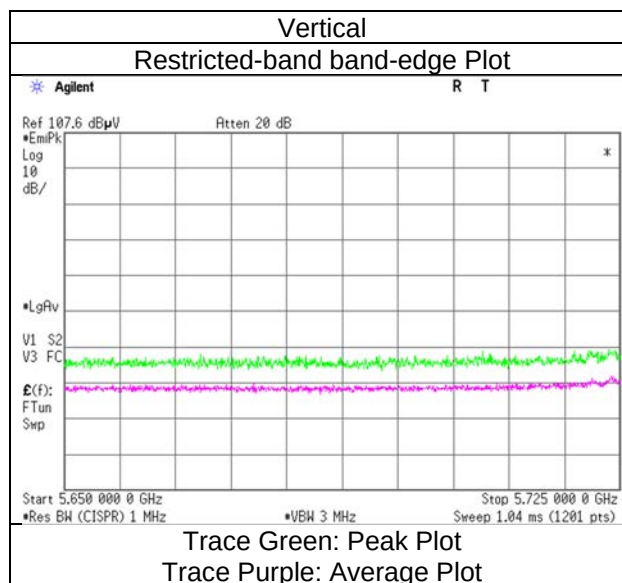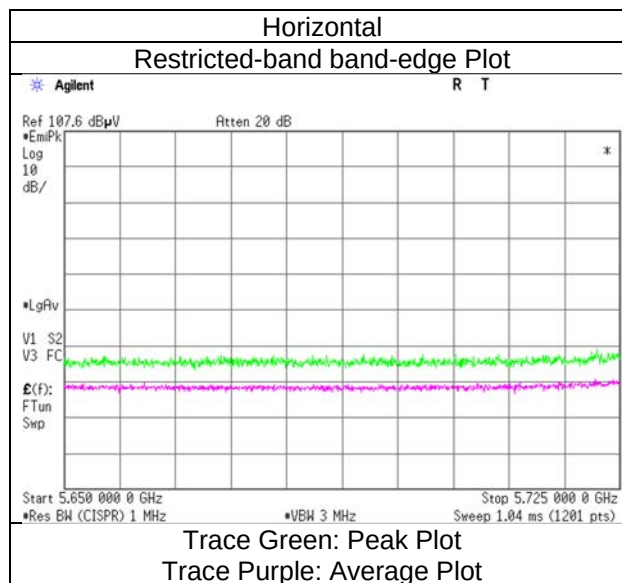

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5785 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11570.0	42.8	34.6	37.3	5.8	36.7	-	49.2	41.0	73.9	53.9	24.7	12.9	Floor noise
Hori.	17355.0	43.5	-	39.9	7.2	38.6	-	52.0	-	68.2	-	16.3	-	Floor noise
Vert.	11570.0	42.6	34.6	37.3	5.8	36.7	-	49.0	41.0	73.9	53.9	24.9	12.9	Floor noise
Vert.	17355.0	45.5	-	39.9	7.2	38.6	-	54.0	-	68.2	-	14.3	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Yuta Moriya	10 GHz to 18 GHz
April 15, 2026	SAC4	21 deg. C	63 % RH	Yuta Moriya	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	42.9	-	32.8	3.8	31.1	-	48.4	-	122.2	-	73.9	-	
Hori.	5855.0	41.6	-	32.8	3.8	31.1	-	47.0	-	110.8	-	63.8	-	
Hori.	5875.0	41.2	-	32.8	3.8	31.1	-	46.6	-	105.2	-	58.6	-	
Hori.	5925.0	40.2	-	32.8	3.8	31.1	-	45.6	-	68.2	-	22.6	-	
Hori.	11650.0	44.4	35.0	37.3	5.8	36.7	-	50.8	41.4	73.9	53.9	23.1	12.5	Floor noise
Hori.	17475.0	43.9	-	40.0	7.2	38.6	-	52.5	-	68.2	-	15.7	-	Floor noise
Vert.	5850.0	42.7	-	32.8	3.8	31.1	-	48.1	-	122.2	-	74.1	-	
Vert.	5855.0	41.5	-	32.8	3.8	31.1	-	47.0	-	110.8	-	63.9	-	
Vert.	5875.0	41.1	-	32.8	3.8	31.1	-	46.6	-	105.2	-	58.6	-	
Vert.	5925.0	40.6	-	32.8	3.8	31.1	-	46.1	-	68.2	-	22.1	-	
Vert.	11650.0	43.7	35.1	37.3	5.8	36.7	-	50.1	41.5	73.9	53.9	23.8	12.4	Floor noise
Vert.	17475.0	44.4	-	40.0	7.2	38.6	-	53.0	-	68.2	-	15.2	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-20 (OFDMA) 5825 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 5, 2026	SAC4	22 deg. C	44 % RH	Junki Nagatomi	1 GHz to 10 GHz

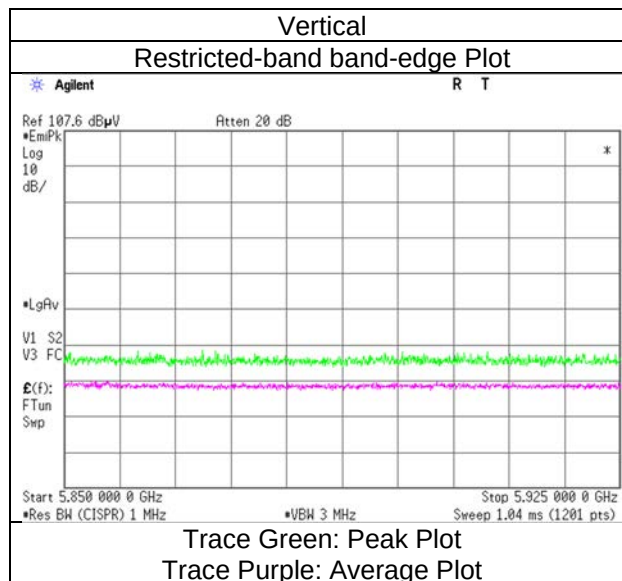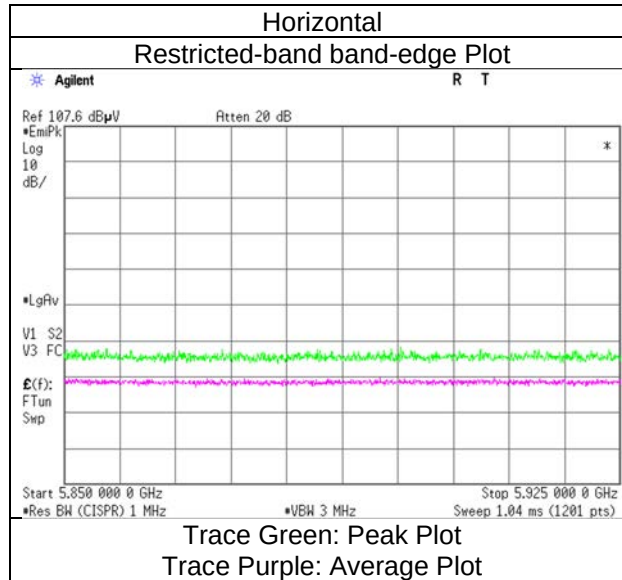

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5190 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	52.0	39.2	31.9	3.6	32.4	2.9	55.0	45.2	73.9	53.9	18.9	8.7	*1)
Hori.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Hori.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Hori.	36330.0	65.9	-	43.6	4.4	74.3	-	39.6	-	68.2	-	28.6	-	-
Vert.	5150.0	51.7	39.0	31.9	3.6	32.4	2.9	54.7	45.0	73.9	53.9	19.2	8.9	*1)
Vert.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Vert.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Vert.	36330.0	65.6	-	43.6	4.4	74.3	-	39.3	-	68.2	-	28.9	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5190 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

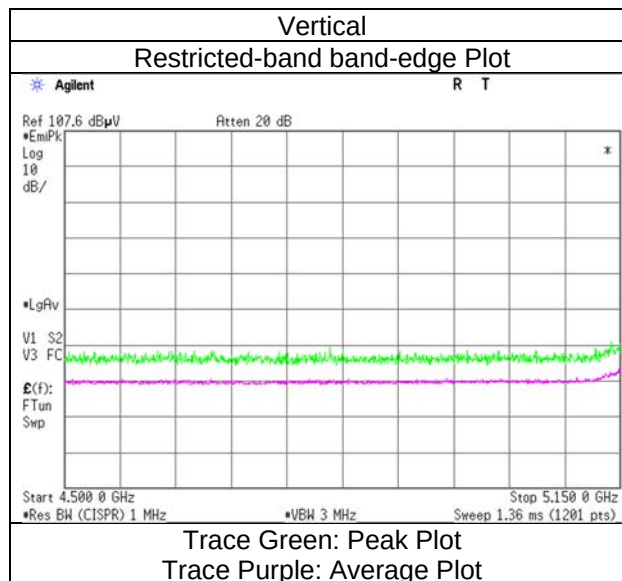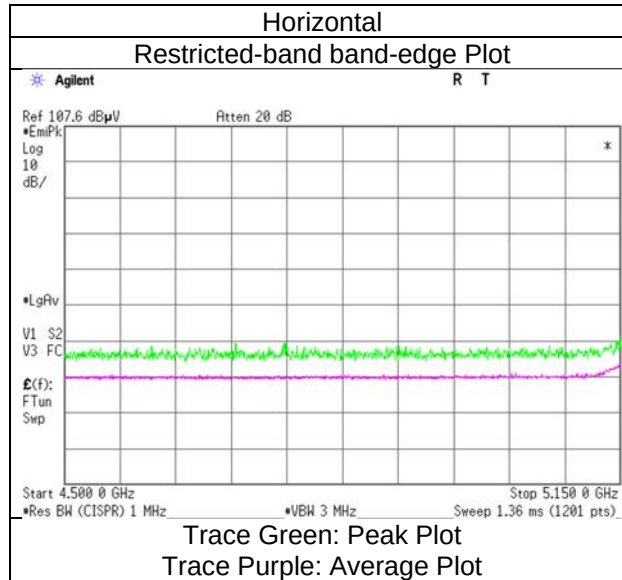

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5270 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Hori.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Hori.	36890.0	63.8	-	43.8	4.5	73.6	-	38.5	-	68.2	-	29.7	-	
Vert.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Vert.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Vert.	36890.0	65.6	-	43.8	4.5	73.6	-	40.3	-	68.2	-	27.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ac-40 5310 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	50.8	35.4	31.6	3.7	32.3	2.9	53.7	41.3	73.9	53.9	20.2	12.6	*1)
Hori.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Hori.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Hori.	37170.0	65.2	-	43.8	4.6	73.4	-	40.2	-	68.2	-	28.0	-	-
Vert.	5350.0	50.6	35.1	31.6	3.7	32.3	2.9	53.5	41.0	73.9	53.9	20.4	12.9	*1)
Vert.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Vert.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Vert.	37170.0	66.6	-	43.8	4.6	73.4	-	41.6	-	68.2	-	26.7	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5310 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

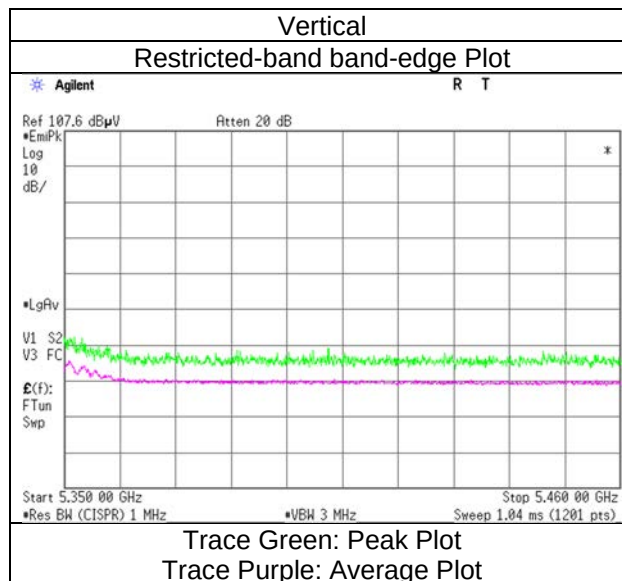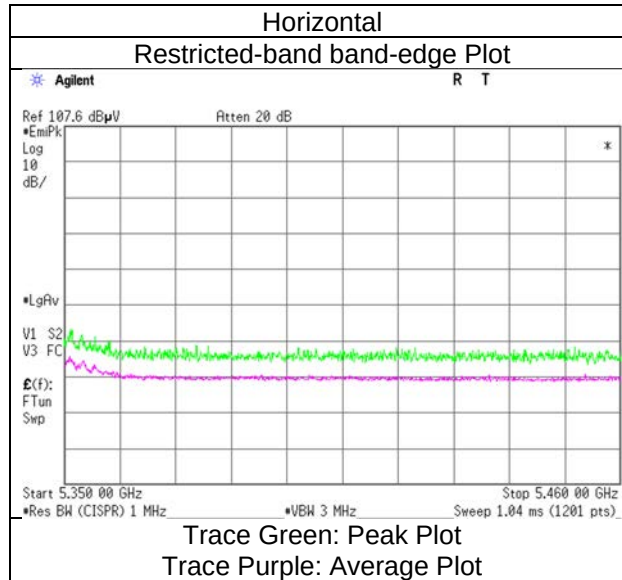

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5510 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading	Reading	Ant.	Loss	Gain	Duty	Result	Result	Limit	Limit	Margin	Margin	Remark
[Hori/Vert]	[MHz]	(QP / PK)	(AV)	Factor	[dB]	[dB]	Factor	(QP / PK)	(AV)	(QP / PK)	(AV)	(QP / PK)	(AV)	
[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	47.8	36.2	31.8	3.7	32.3	2.9	51.0	42.3	68.2	53.9	17.3	11.6	*1)
Hori.	5470.0	52.1	-	31.8	3.7	32.3	-	55.3	-	68.2	-	12.9	-	-
Hori.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Hori.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Hori.	38570.0	68.1	-	43.8	4.9	73.4	-	43.3	-	68.2	-	24.9	-	-
Vert.	5460.0	47.7	35.9	31.8	3.7	32.3	2.9	50.8	42.0	68.2	53.9	17.4	11.9	*1)
Vert.	5470.0	51.9	-	31.8	3.7	32.3	-	55.1	-	68.2	-	13.1	-	-
Vert.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Vert.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Vert.	38570.0	70.7	-	43.8	4.9	73.4	-	45.9	-	68.2	-	22.3	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5510 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

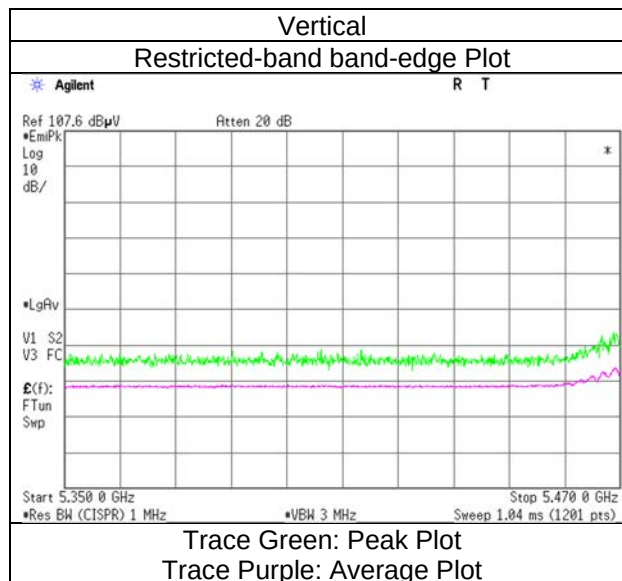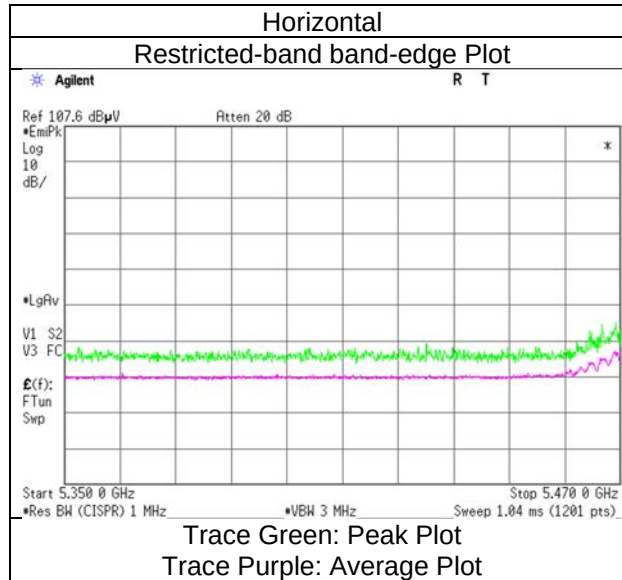

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5590 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Hori.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Hori.	39130.0	66.5	60.5	43.8	5.0	73.9	2.9	41.4	38.3	73.9	53.9	32.5	15.6	*2)
Vert.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Vert.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Vert.	39130.0	69.3	64.2	43.8	5.0	73.9	2.9	44.2	42.0	73.9	53.9	29.7	11.9	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5670 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	45.0	-	31.9	3.8	32.3	-	48.4	-	68.2	-	19.8	-	
Hori.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Hori.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Hori.	39690.0	65.5	59.7	43.9	5.1	73.5	2.9	41.0	38.1	73.9	53.9	32.9	15.8	*2)
Vert.	5725.0	44.7	-	31.9	3.8	32.3	-	48.1	-	68.2	-	20.1	-	
Vert.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Vert.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Vert.	39690.0	70.1	64.7	43.9	5.1	73.5	2.9	45.6	43.1	73.9	53.9	28.3	10.8	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

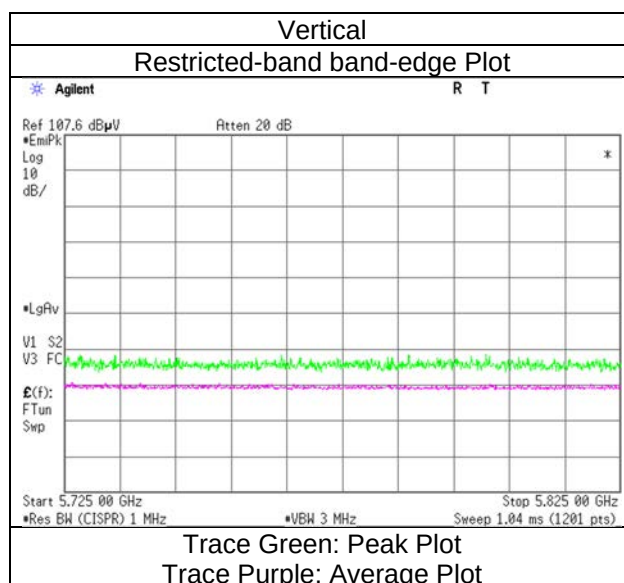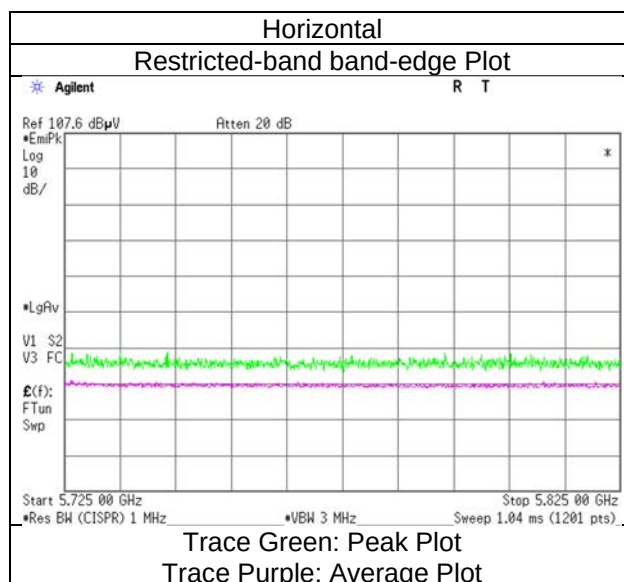

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5755 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	44.1	-	31.8	3.8	32.3	-	47.3	-	68.2	-	20.9	-	
Hori.	5700.0	44.5	-	31.9	3.8	32.3	-	47.8	-	105.2	-	57.4	-	
Hori.	5720.0	45.6	-	31.9	3.8	32.3	-	49.0	-	110.8	-	61.8	-	
Hori.	5725.0	46.0	-	31.9	3.8	32.3	-	49.4	-	122.2	-	72.8	-	
Hori.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Hori.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise
Vert.	5650.0	43.8	-	31.8	3.8	32.3	-	47.0	-	68.2	-	21.2	-	
Vert.	5700.0	44.3	-	31.9	3.8	32.3	-	47.7	-	105.2	-	57.5	-	
Vert.	5720.0	45.2	-	31.9	3.8	32.3	-	48.7	-	110.8	-	62.1	-	
Vert.	5725.0	45.9	-	31.9	3.8	32.3	-	49.3	-	122.2	-	72.9	-	
Vert.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Vert.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5755 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

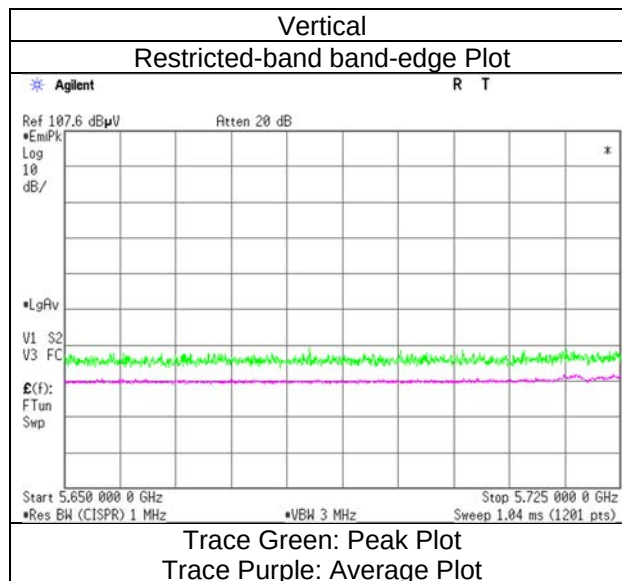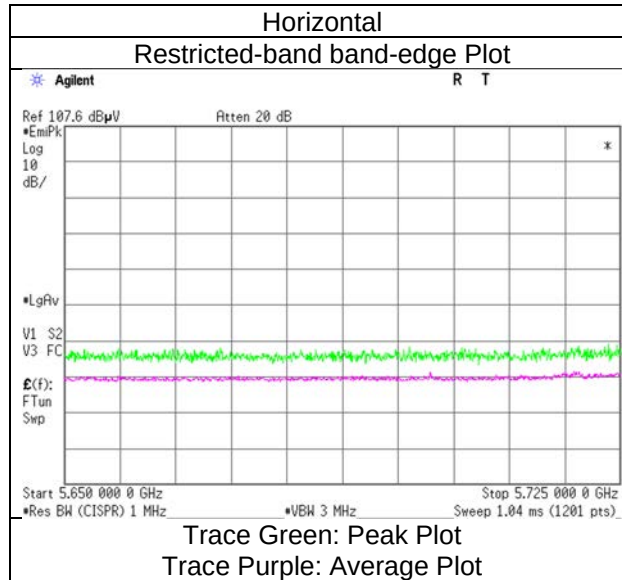

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-40 5795 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	44.7	-	32.3	3.9	32.3	-	48.5	-	122.2	-	73.7	-	
Hori.	5855.0	44.2	-	32.3	3.9	32.3	-	48.0	-	110.8	-	62.8	-	
Hori.	5875.0	43.9	-	32.3	3.9	32.3	-	47.8	-	105.2	-	57.4	-	
Hori.	5925.0	43.7	-	32.4	3.9	32.3	-	47.7	-	68.2	-	20.6	-	*1)
Hori.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Hori.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise
Vert.	5850.0	44.4	-	32.3	3.9	32.3	-	48.2	-	122.2	-	74.0	-	
Vert.	5855.0	44.0	-	32.3	3.9	32.3	-	47.8	-	110.8	-	63.0	-	
Vert.	5875.0	43.5	-	32.3	3.9	32.3	-	47.4	-	105.2	-	57.8	-	
Vert.	5925.0	43.4	-	32.4	3.9	32.3	-	47.4	-	68.2	-	20.9	-	*1)
Vert.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Vert.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-40 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 23, 2026	SAC2	22 deg. C	43 % RH	Takumi Nishida	1 GHz to 10 GHz

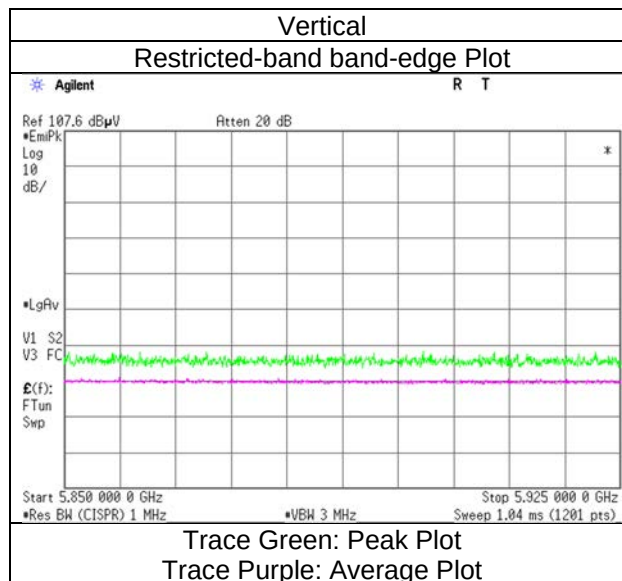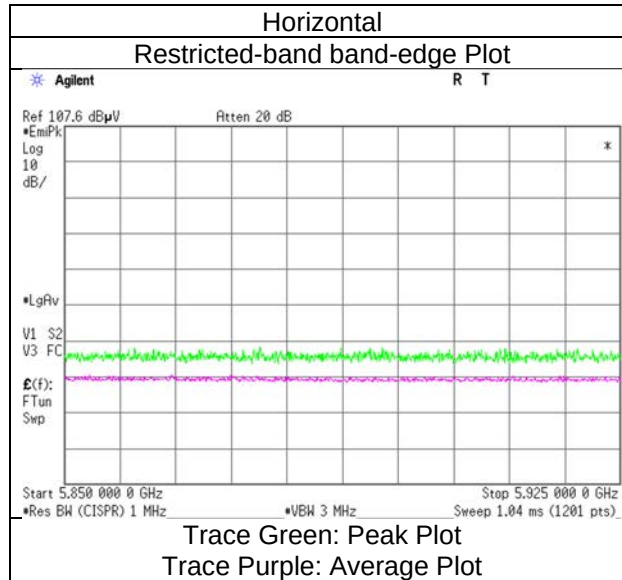

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5190 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	48.1	37.9	31.9	3.6	32.4	3.1	51.2	44.1	73.9	53.9	22.7	9.8	*1)
Hori.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Hori.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Hori.	36330.0	64.4	-	43.6	4.4	74.3	-	38.1	-	68.2	-	30.1	-	-
Vert.	5150.0	48.4	37.9	31.9	3.6	32.4	3.1	51.4	44.1	73.9	53.9	22.5	9.8	*1)
Vert.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Vert.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Vert.	36330.0	65.1	-	43.6	4.4	74.3	-	38.9	-	68.2	-	29.3	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5190 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

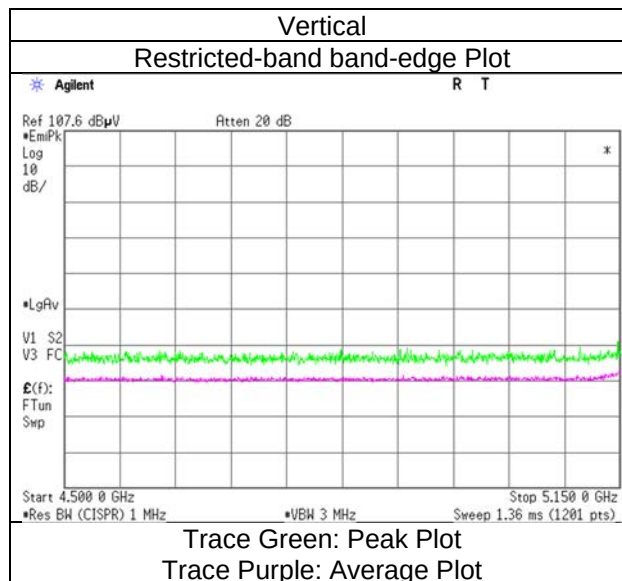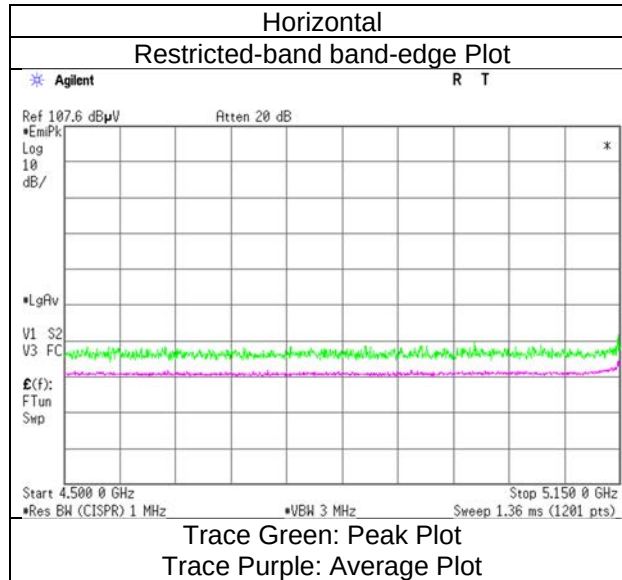

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5270 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Hori.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Hori.	36890.0	63.6	-	43.8	4.5	73.6	-	38.3	-	68.2	-	29.9	-	
Vert.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Vert.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Vert.	36890.0	66.0	-	43.8	4.5	73.6	-	40.6	-	68.2	-	27.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-40 5310 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	52.6	40.6	31.6	3.7	32.3	3.1	55.6	46.7	73.9	53.9	18.4	7.2	*1)
Hori.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Hori.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Hori.	37170.0	65.2	-	43.8	4.6	73.4	-	40.2	-	68.2	-	28.0	-	-
Vert.	5350.0	51.4	40.1	31.6	3.7	32.3	3.1	54.3	46.1	73.9	53.9	19.6	7.8	*1)
Vert.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Vert.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Vert.	37170.0	66.6	-	43.8	4.6	73.4	-	41.6	-	68.2	-	26.6	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-40 5310 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

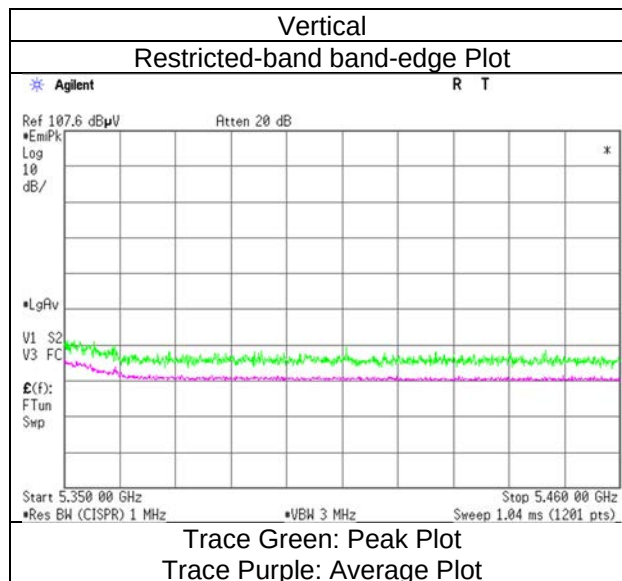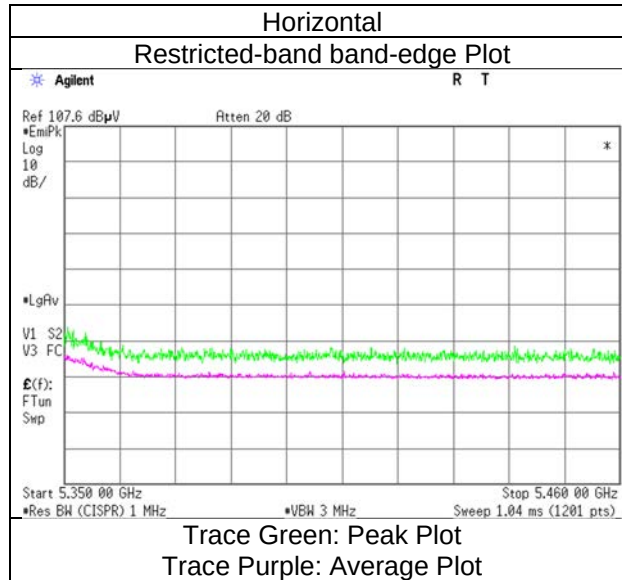

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5510 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	45.6	36.1	31.8	3.7	32.3	3.1	48.7	42.4	68.2	53.9	19.5	11.5	*1)
Hori.	5470.0	50.6	-	31.8	3.7	32.3	-	53.8	-	68.2	-	14.4	-	-
Hori.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Hori.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Hori.	38570.0	68.1	-	43.8	4.9	73.4	-	43.3	-	68.2	-	24.9	-	-
Vert.	5460.0	46.6	36.1	31.8	3.7	32.3	3.1	49.7	42.4	68.2	53.9	18.5	11.5	*1)
Vert.	5470.0	51.1	-	31.8	3.7	32.3	-	54.3	-	68.2	-	14.0	-	-
Vert.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Vert.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Vert.	38570.0	70.8	-	43.8	4.9	73.4	-	46.1	-	68.2	-	22.1	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5510 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

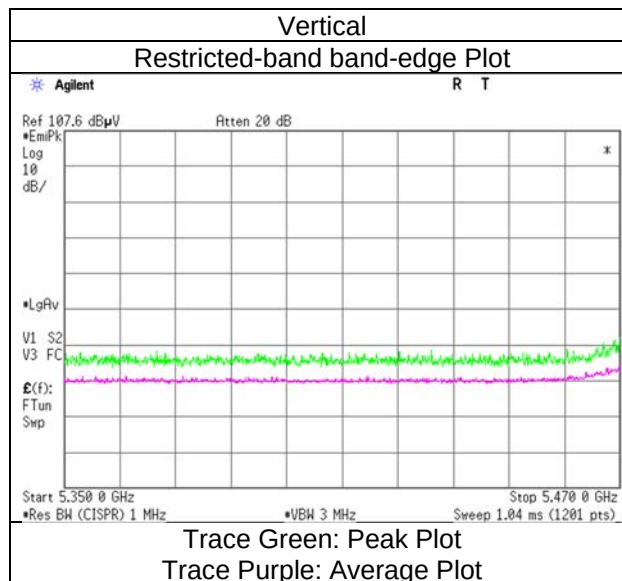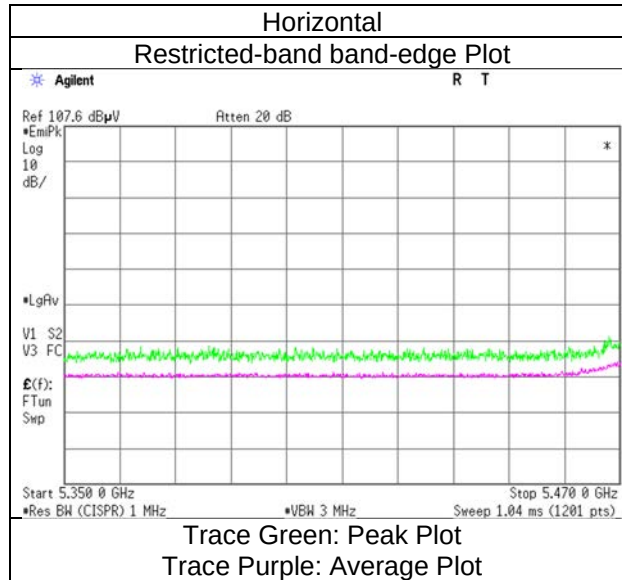

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5590 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Hori.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Hori.	39130.0	65.4	60.3	43.8	5.0	73.9	3.1	40.3	38.4	73.9	53.9	33.6	15.5	*2)
Vert.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Vert.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Vert.	39130.0	69.9	64.2	43.8	5.0	73.9	3.1	44.8	42.2	73.9	53.9	29.1	11.7	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5670 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	44.0	-	31.9	3.8	32.3	-	47.5	-	68.2	-	20.7	-	
Hori.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Hori.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Hori.	39690.0	65.7	59.7	43.9	5.1	73.5	3.1	41.2	38.3	73.9	53.9	32.8	15.6	*2)
Vert.	5725.0	44.3	-	31.9	3.8	32.3	-	47.8	-	68.2	-	20.4	-	
Vert.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Vert.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Vert.	39690.0	70.0	64.7	43.9	5.1	73.5	3.1	45.5	43.3	73.9	53.9	28.5	10.6	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5670 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

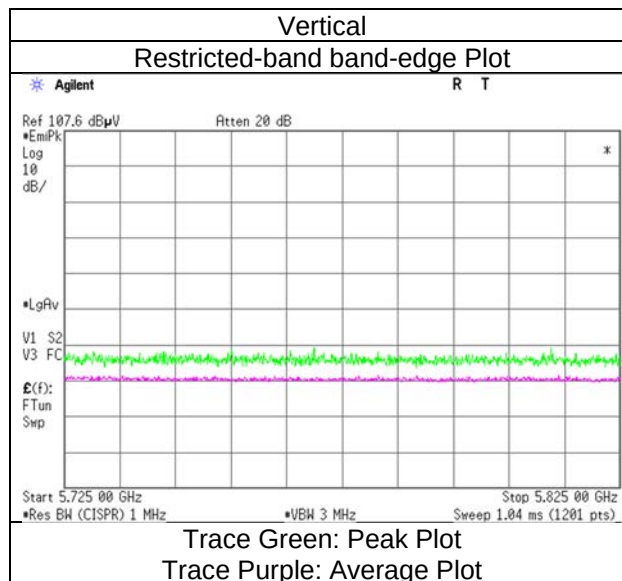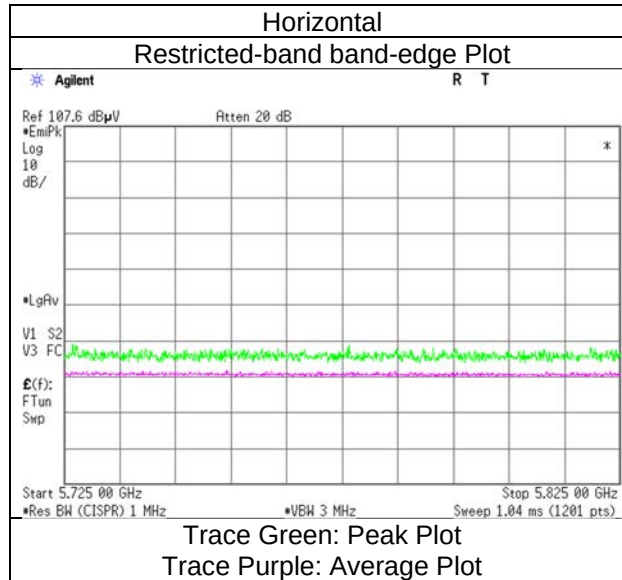

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5755 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	44.0	-	31.8	3.8	32.3	-	47.3	-	68.2	-	20.9	-	
Hori.	5700.0	44.1	-	31.9	3.8	32.3	-	47.4	-	105.2	-	57.8	-	
Hori.	5720.0	46.1	-	31.9	3.8	32.3	-	49.5	-	110.8	-	61.3	-	
Hori.	5725.0	46.9	-	31.9	3.8	32.3	-	50.3	-	122.2	-	71.9	-	
Hori.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Hori.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise
Vert.	5650.0	44.0	-	31.8	3.8	32.3	-	47.2	-	68.2	-	21.0	-	
Vert.	5700.0	44.8	-	31.9	3.8	32.3	-	48.1	-	105.2	-	57.1	-	
Vert.	5720.0	46.6	-	31.9	3.8	32.3	-	50.0	-	110.8	-	60.8	-	
Vert.	5725.0	47.5	-	31.9	3.8	32.3	-	50.9	-	122.2	-	71.3	-	
Vert.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Vert.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5755 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

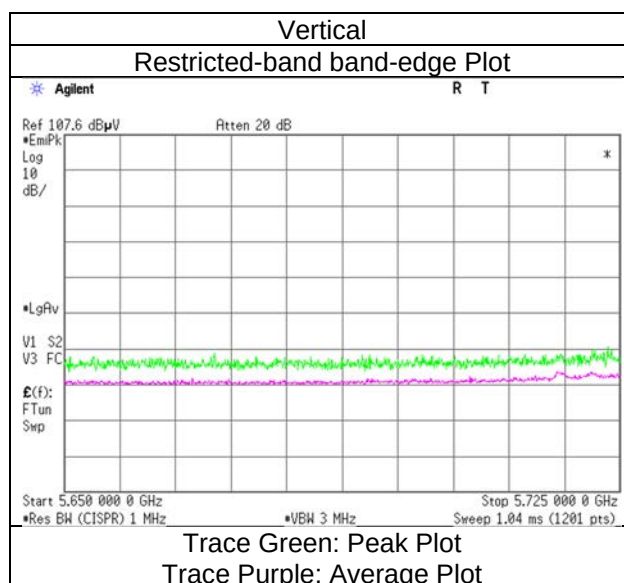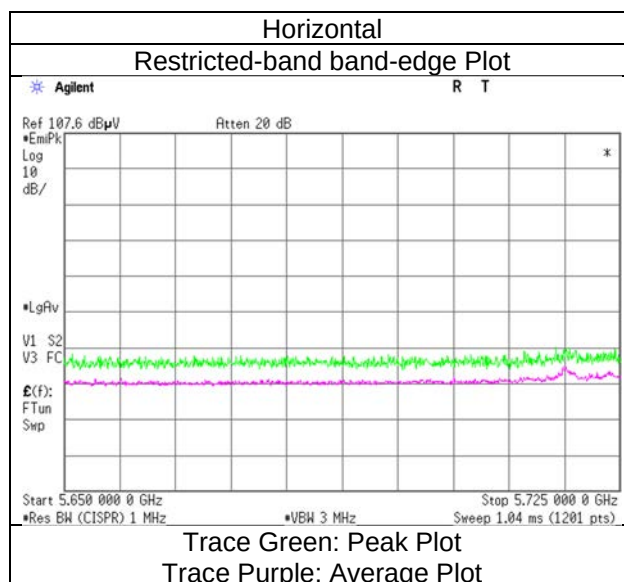

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 5795 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]											
Hori.	5850.0	43.9	-	32.3	3.9	32.3	-	47.7	-	122.2	-	74.5	-	
Hori.	5855.0	43.8	-	32.3	3.9	32.3	-	47.7	-	110.8	-	63.2	-	
Hori.	5875.0	43.4	-	32.3	3.9	32.3	-	47.3	-	105.2	-	57.9	-	
Hori.	5925.0	43.8	-	32.4	3.9	32.3	-	47.8	-	68.2	-	20.5	-	*1)
Hori.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Hori.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise
Vert.	5850.0	44.3	-	32.3	3.9	32.3	-	48.1	-	122.2	-	74.1	-	
Vert.	5855.0	44.2	-	32.3	3.9	32.3	-	48.0	-	110.8	-	62.8	-	
Vert.	5875.0	43.5	-	32.3	3.9	32.3	-	47.4	-	105.2	-	57.8	-	
Vert.	5925.0	43.9	-	32.4	3.9	32.3	-	47.8	-	68.2	-	20.4	-	*1)
Vert.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Vert.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 5795 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

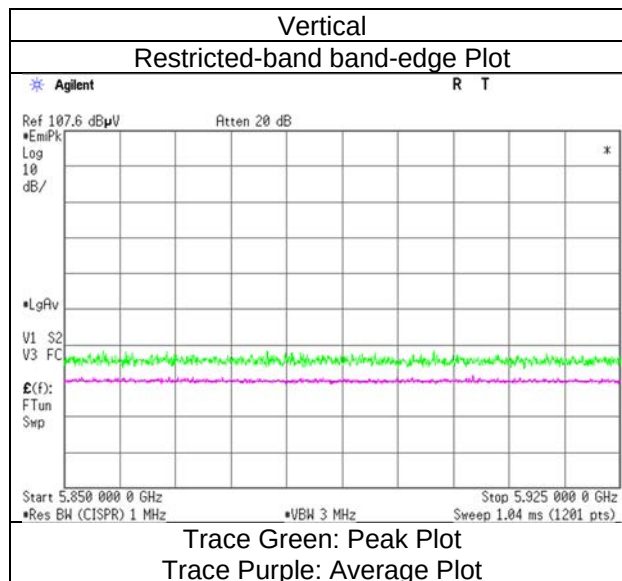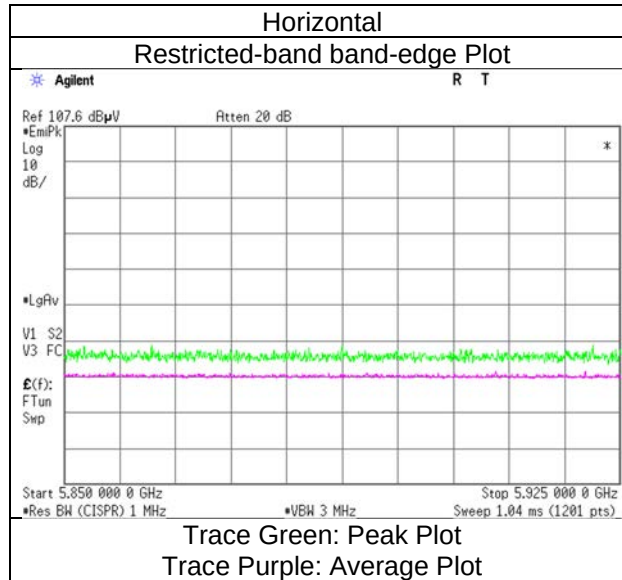

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5150.0	42.8	32.0	32.1	3.5	30.9	-	47.5	36.7	73.9	53.9	26.4	17.2	
Vert.	5150.0	43.0	32.3	32.1	3.5	30.9	-	47.7	37.0	73.9	53.9	26.2	16.9	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

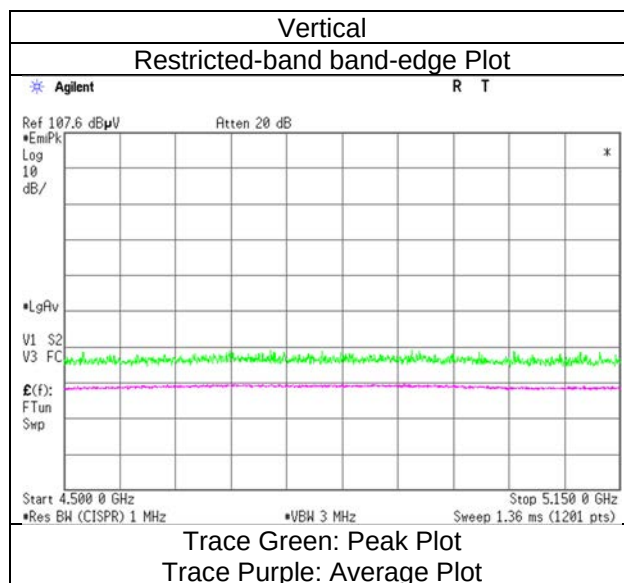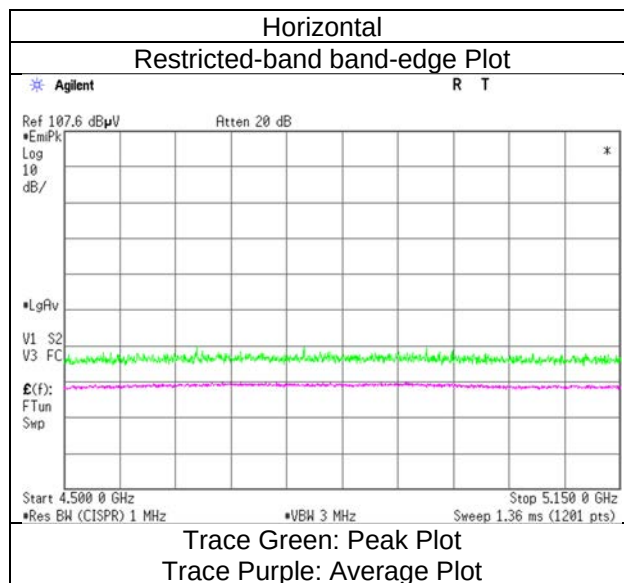

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 26 tone-RU index 17
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5350.0	41.8	32.2	31.7	3.6	31.0	-	46.2	36.6	73.9	53.9	27.7	17.3	
Vert.	5350.0	42.0	32.5	31.7	3.6	31.0	-	46.4	36.9	73.9	53.9	27.5	17.0	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 26 tone-RU index 17				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

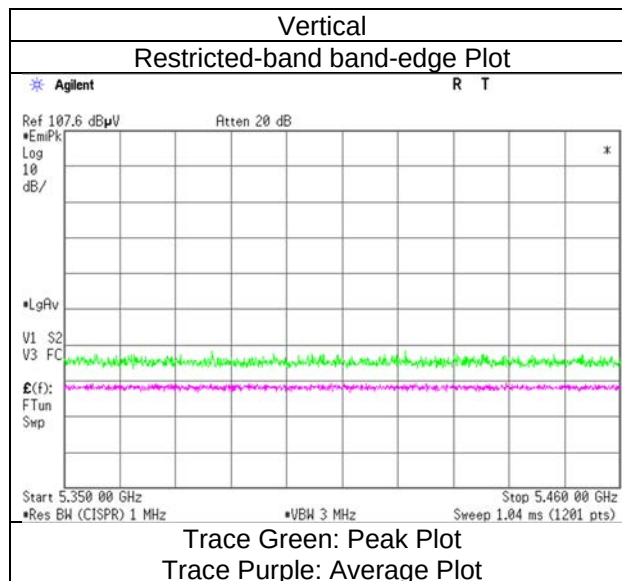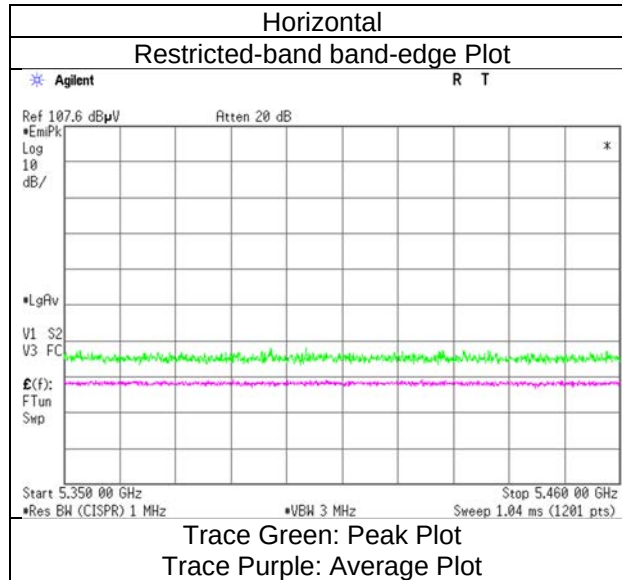

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	40.6	31.9	32.0	3.6	31.0	-	45.3	36.5	68.2	53.9	22.9	17.4	
Hori.	5470.0	40.3	-	32.0	3.6	31.0	-	44.9	-	68.2	-	23.3	-	
Vert.	5460.0	41.4	32.0	32.0	3.6	31.0	-	46.0	36.6	68.2	53.9	22.2	17.3	
Vert.	5470.0	40.3	-	32.0	3.6	31.0	-	44.9	-	68.2	-	23.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

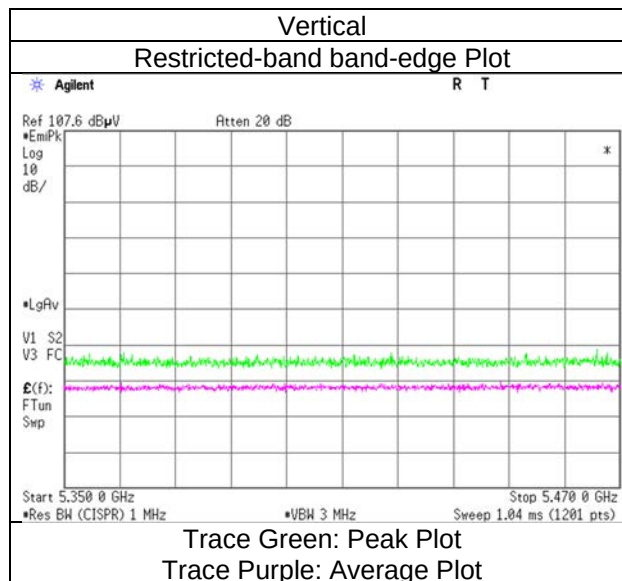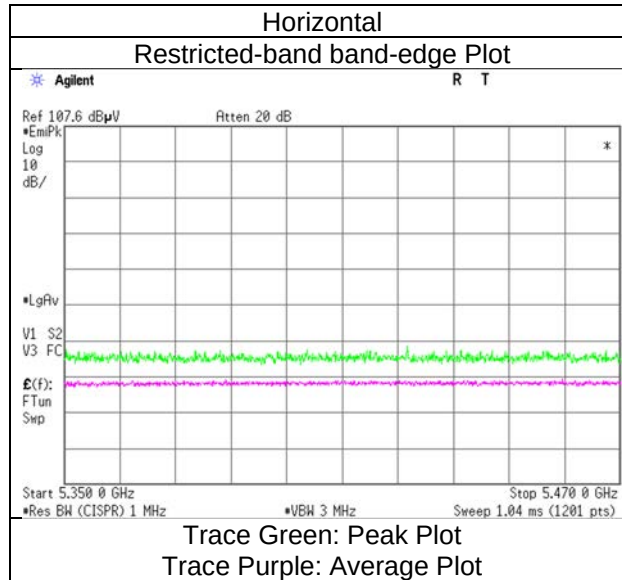

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 26 tone-RU index 17
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	41.4	-	32.5	3.7	31.1	-	46.6	-	68.2	-	21.7	-	
Vert.	5725.0	41.0	-	32.5	3.7	31.1	-	46.2	-	68.2	-	22.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 26 tone-RU index 17				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

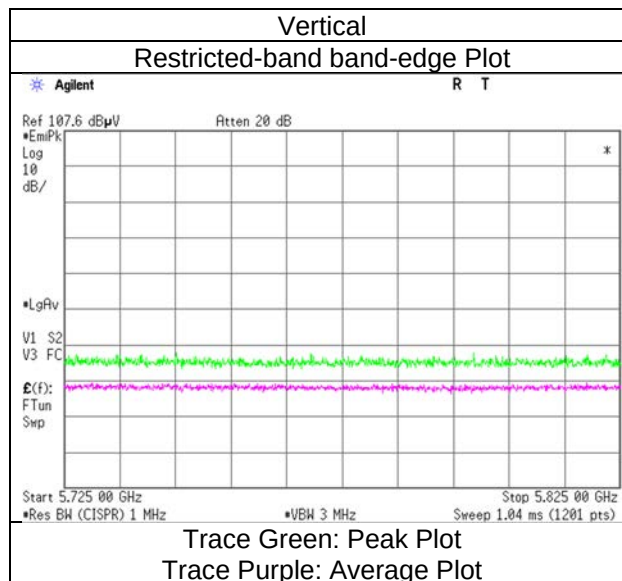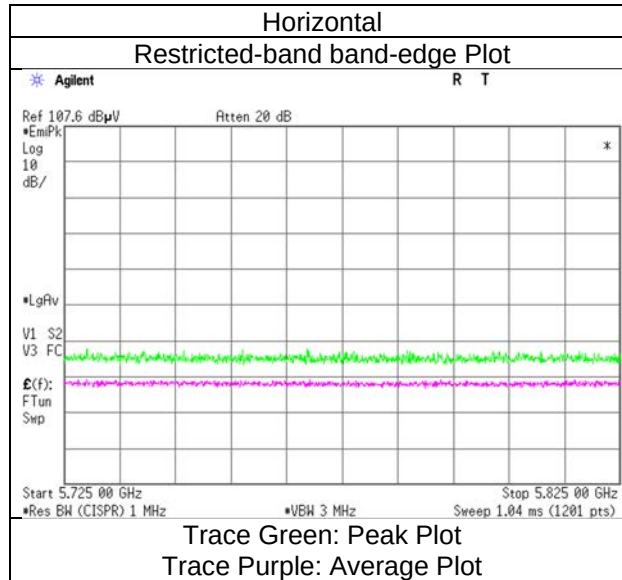

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.1	-	32.3	3.7	31.0	-	45.0	-	68.2	-	23.2	-	
Hori.	5700.0	41.0	-	32.5	3.7	31.1	-	46.2	-	105.2	-	59.1	-	
Hori.	5720.0	45.2	-	32.5	3.7	31.1	-	50.4	-	110.8	-	60.4	-	
Hori.	5725.0	43.7	-	32.5	3.7	31.1	-	48.9	-	122.2	-	73.3	-	
Vert.	5650.0	40.3	-	32.3	3.7	31.0	-	45.3	-	68.2	-	23.0	-	
Vert.	5700.0	40.7	-	32.5	3.7	31.1	-	45.8	-	105.2	-	59.4	-	
Vert.	5720.0	44.3	-	32.5	3.7	31.1	-	49.5	-	110.8	-	61.3	-	
Vert.	5725.0	42.7	-	32.5	3.7	31.1	-	47.8	-	122.2	-	74.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

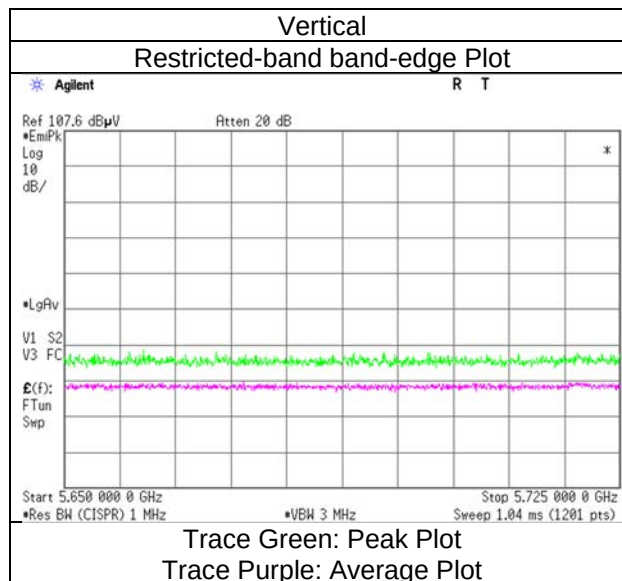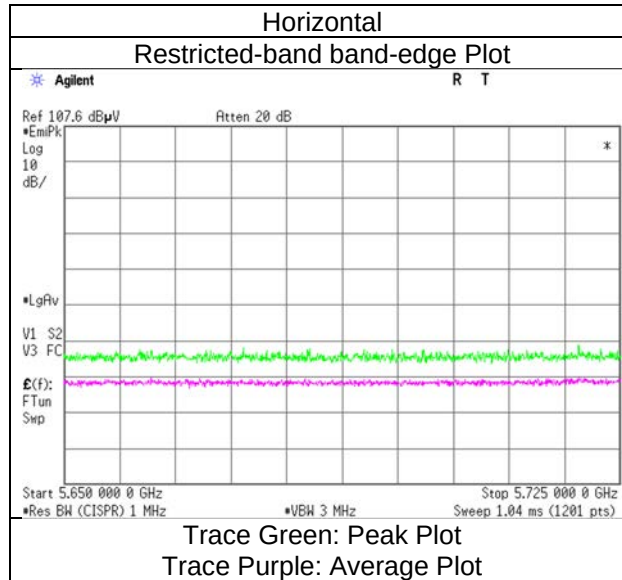

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 26 tone-RU index 17
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	41.5	-	32.8	3.8	31.1	-	46.9	-	122.2	-	75.3	-	
Hori.	5855.0	40.3	-	32.8	3.8	31.1	-	45.7	-	110.8	-	65.1	-	
Hori.	5875.0	40.7	-	32.8	3.8	31.1	-	46.1	-	105.2	-	59.1	-	
Hori.	5925.0	40.2	-	32.8	3.8	31.1	-	45.7	-	68.2	-	22.5	-	
Vert.	5850.0	40.9	-	32.8	3.8	31.1	-	46.3	-	122.2	-	75.9	-	
Vert.	5855.0	40.8	-	32.8	3.8	31.1	-	46.2	-	110.8	-	64.6	-	
Vert.	5875.0	40.0	-	32.8	3.8	31.1	-	45.5	-	105.2	-	59.7	-	
Vert.	5925.0	40.6	-	32.8	3.8	31.1	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 26 tone-RU index 17				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

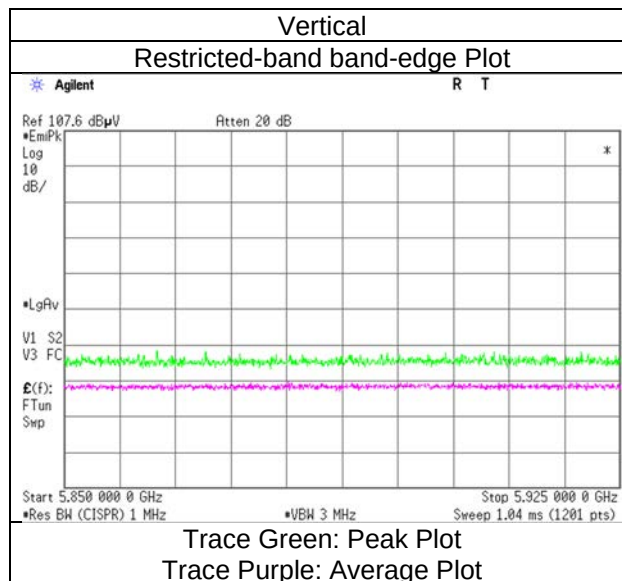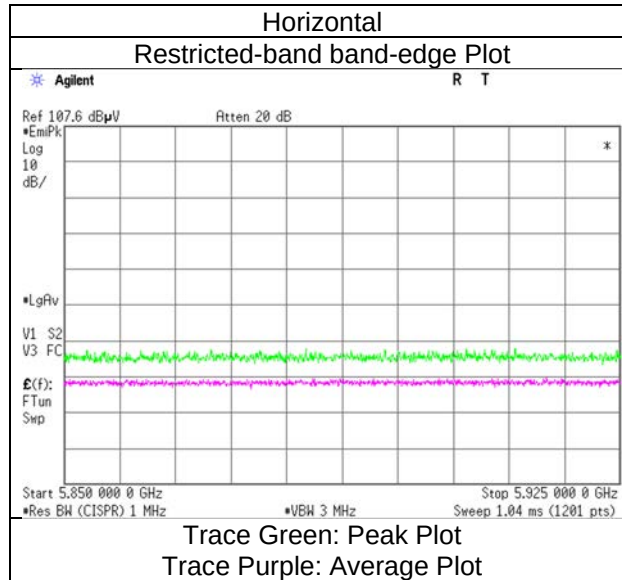

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	42.9	32.3	32.1	3.5	30.9	-	47.6	37.0	73.9	53.9	26.3	16.9	
Vert.	5150.0	43.2	32.6	32.1	3.5	30.9	-	47.9	37.3	73.9	53.9	26.0	16.6	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

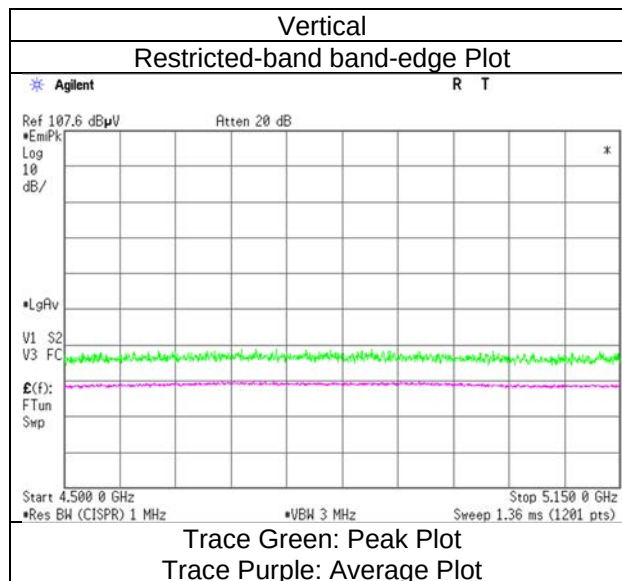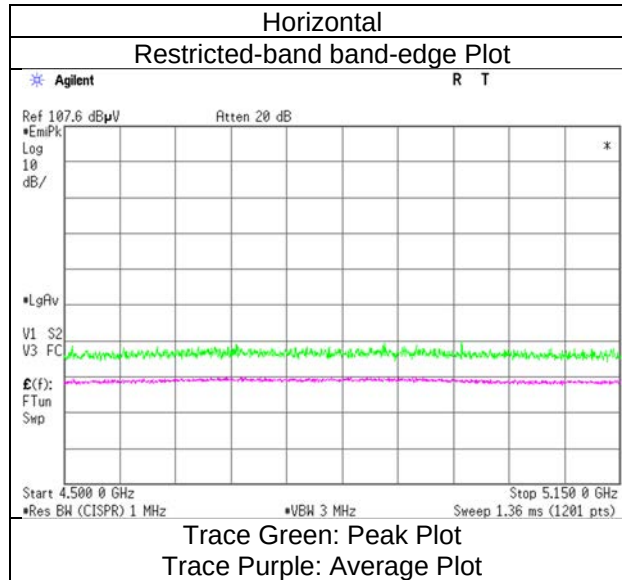

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 52 tone-RU index 44
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5350.0	41.9	32.3	31.7	3.6	31.0	-	46.3	36.7	73.9	53.9	27.6	17.2	
Vert.	5350.0	42.4	32.6	31.7	3.6	31.0	-	46.8	37.0	73.9	53.9	27.1	16.9	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 52 tone-RU index 44				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

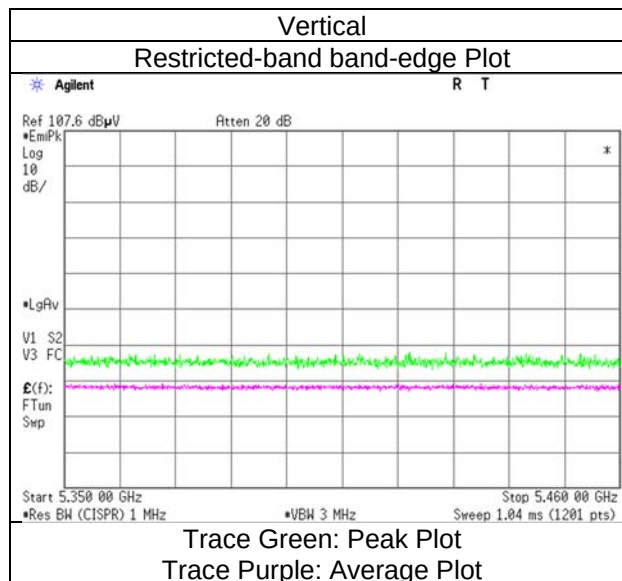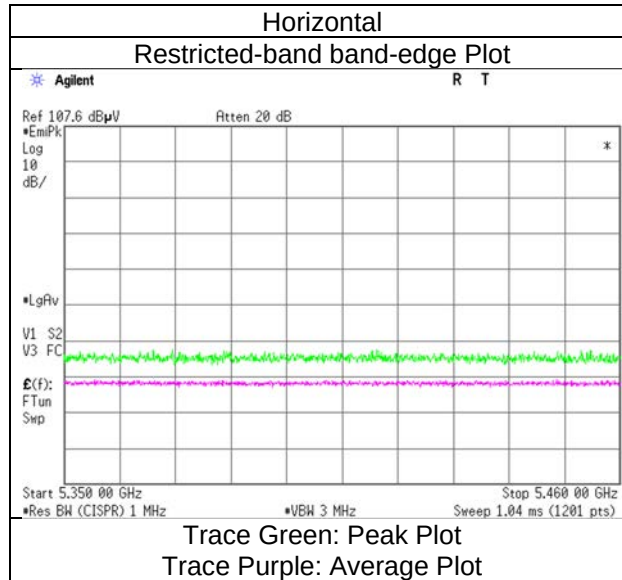

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.5	32.3	32.0	3.6	31.0	-	46.1	36.9	68.2	53.9	22.1	17.0	
Hori.	5470.0	40.9	-	32.0	3.6	31.0	-	45.5	-	68.2	-	22.7	-	
Vert.	5460.0	40.9	32.6	32.0	3.6	31.0	-	45.5	37.3	68.2	53.9	22.7	16.6	
Vert.	5470.0	41.6	-	32.0	3.6	31.0	-	46.2	-	68.2	-	22.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

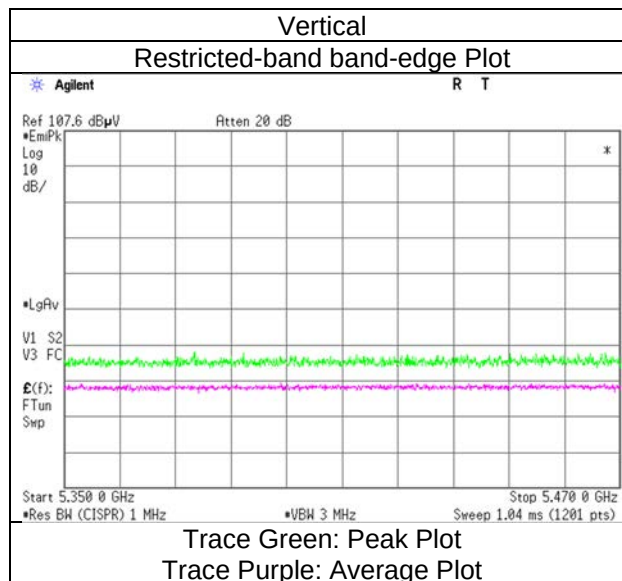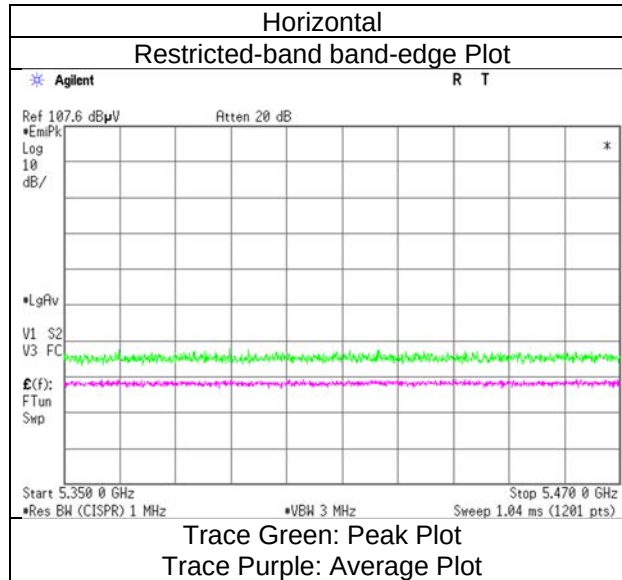

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 52 tone-RU index 44
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	40.8	-	32.5	3.7	31.1	-	46.0	-	68.2	-	22.2	-	
Vert.	5725.0	41.1	-	32.5	3.7	31.1	-	46.3	-	68.2	-	21.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 52 tone-RU index 44				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

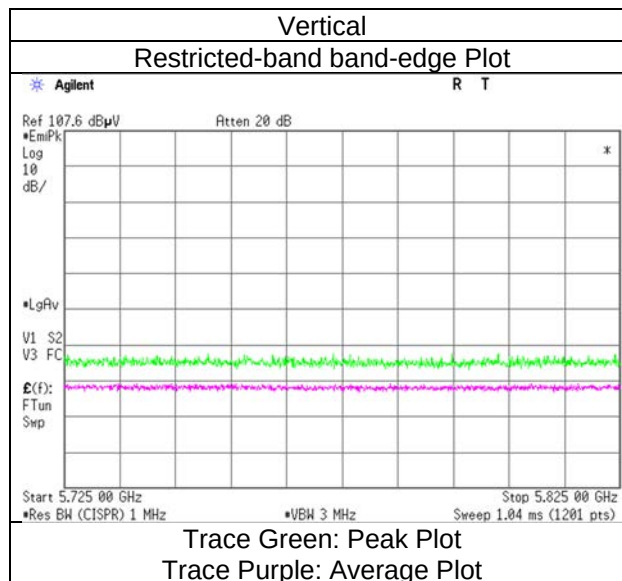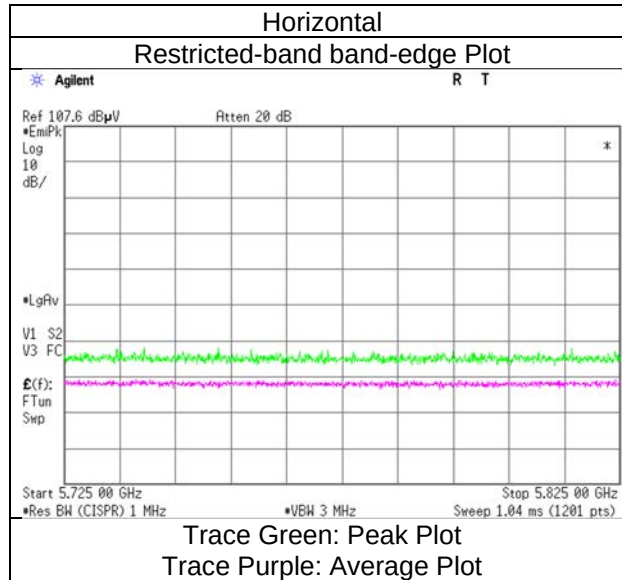

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 52 tone-RU index 37
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	39.9	-	32.3	3.7	31.0	-	44.8	-	68.2	-	23.4	-	
Hori.	5700.0	41.2	-	32.5	3.7	31.1	-	46.3	-	105.2	-	58.9	-	
Hori.	5720.0	43.1	-	32.5	3.7	31.1	-	48.2	-	110.8	-	62.6	-	
Hori.	5725.0	43.3	-	32.5	3.7	31.1	-	48.5	-	122.2	-	73.7	-	
Vert.	5650.0	40.2	-	32.3	3.7	31.0	-	45.2	-	68.2	-	23.0	-	
Vert.	5700.0	40.6	-	32.5	3.7	31.1	-	45.7	-	105.2	-	59.5	-	
Vert.	5720.0	42.8	-	32.5	3.7	31.1	-	48.0	-	110.8	-	62.8	-	
Vert.	5725.0	43.9	-	32.5	3.7	31.1	-	49.1	-	122.2	-	73.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 52 tone-RU index 37				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

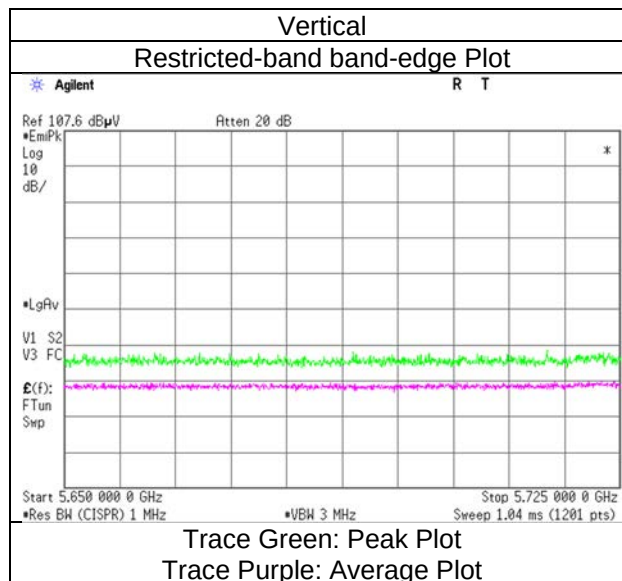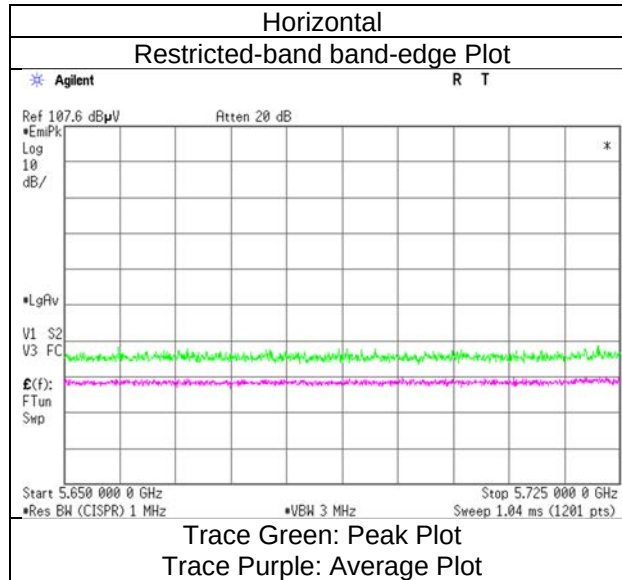

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 52 tone-RU index 44
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.3	-	32.8	3.8	31.1	-	45.7	-	122.2	-	76.5	-	
Hori.	5855.0	40.4	-	32.8	3.8	31.1	-	45.8	-	110.8	-	65.0	-	
Hori.	5875.0	40.9	-	32.8	3.8	31.1	-	46.4	-	105.2	-	58.8	-	
Hori.	5925.0	40.5	-	32.8	3.8	31.1	-	45.9	-	68.2	-	22.3	-	
Vert.	5850.0	40.6	-	32.8	3.8	31.1	-	46.1	-	122.2	-	76.1	-	
Vert.	5855.0	40.2	-	32.8	3.8	31.1	-	45.6	-	110.8	-	65.2	-	
Vert.	5875.0	40.3	-	32.8	3.8	31.1	-	45.8	-	105.2	-	59.4	-	
Vert.	5925.0	40.1	-	32.8	3.8	31.1	-	45.6	-	68.2	-	22.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 52 tone-RU index 44				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

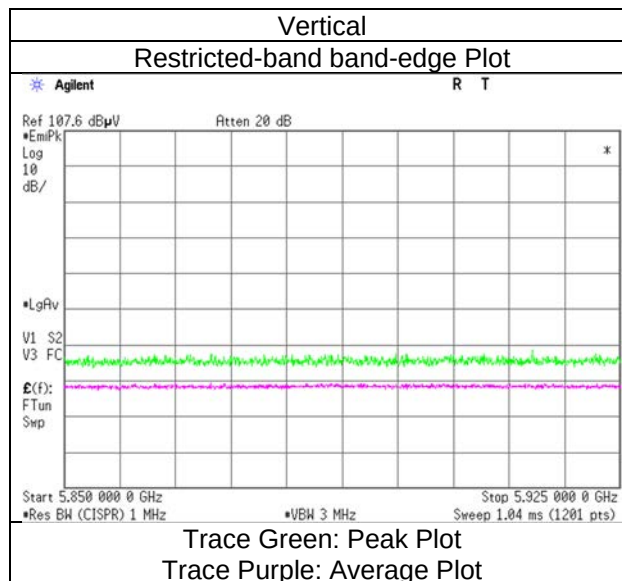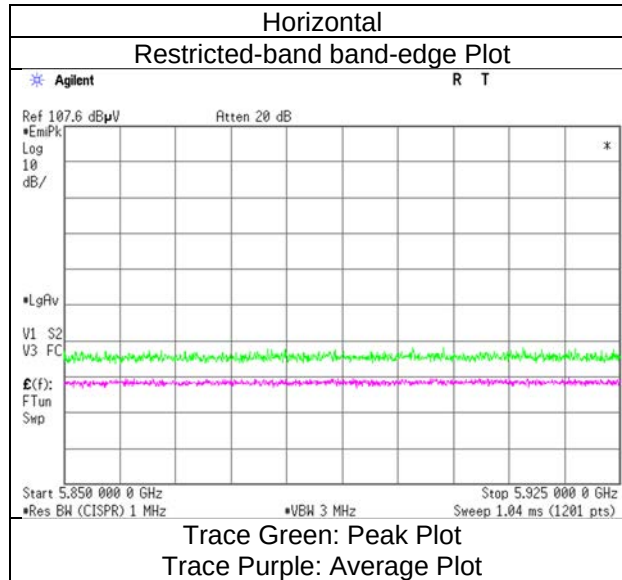

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 106 tone-RU index 53
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5150.0	43.0	32.5	32.1	3.5	30.9	-	47.7	37.2	73.9	53.9	26.2	16.7	
Vert.	5150.0	43.3	32.8	32.1	3.5	30.9	-	48.0	37.5	73.9	53.9	25.9	16.4	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 106 tone-RU index 53				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

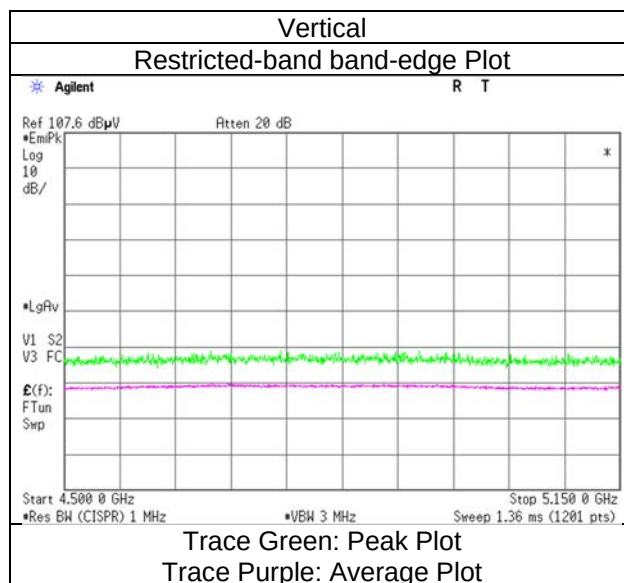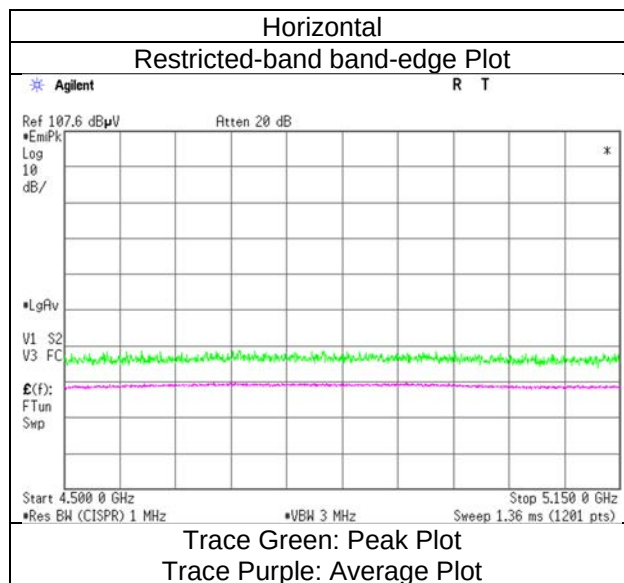

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 106 tone-RU index 56
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5350.0	42.2	32.4	31.7	3.6	31.0	-	46.6	36.8	73.9	53.9	27.3	17.1	
Vert.	5350.0	42.6	32.8	31.7	3.6	31.0	-	47.0	37.2	73.9	53.9	26.9	16.7	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 106 tone-RU index 56				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

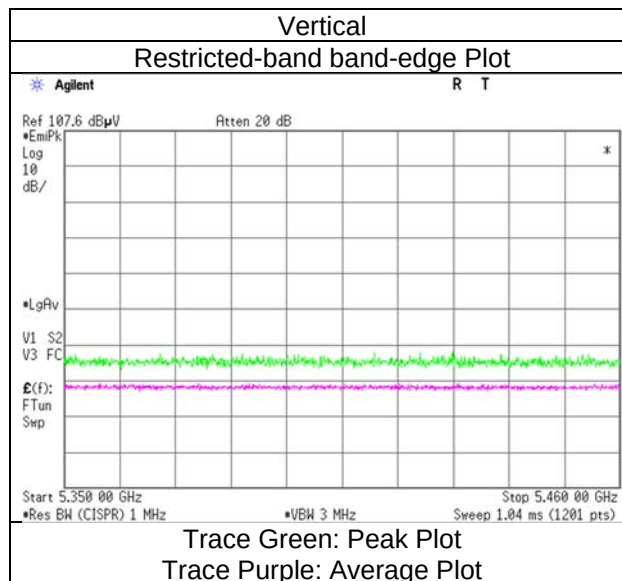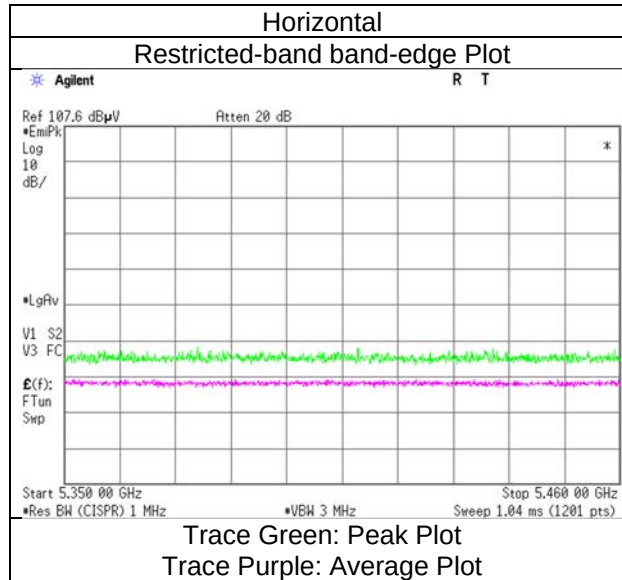

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 106 tone-RU index 53
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.1	32.4	32.0	3.6	31.0	-	45.7	37.0	68.2	53.9	22.5	16.9	
Hori.	5470.0	40.8	-	32.0	3.6	31.0	-	45.4	-	68.2	-	22.8	-	
Vert.	5460.0	41.2	32.5	32.0	3.6	31.0	-	45.8	37.2	68.2	53.9	22.4	16.7	
Vert.	5470.0	41.4	-	32.0	3.6	31.0	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 106 tone-RU index 53				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

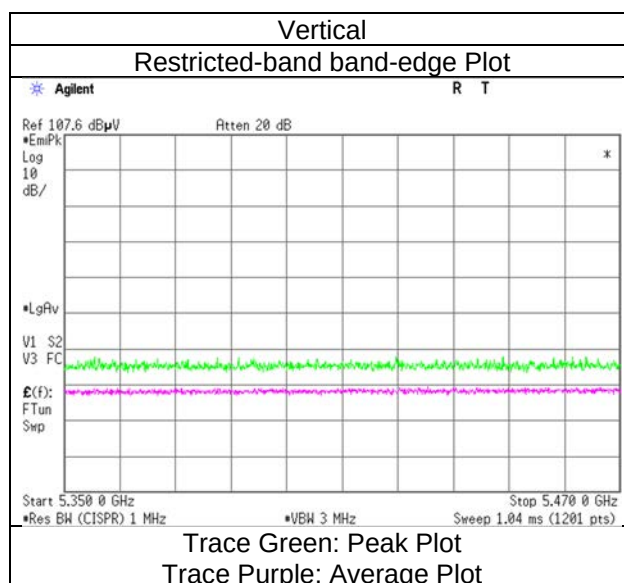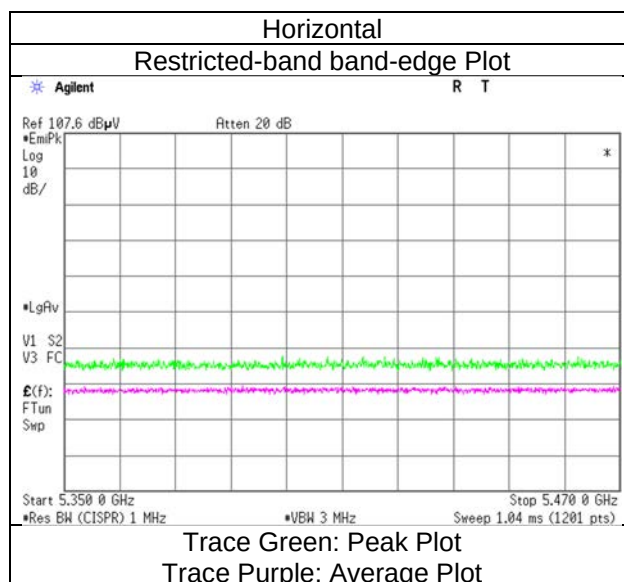

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 106 tone-RU index 56
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	40.6	-	32.5	3.7	31.1	-	45.8	-	68.2	-	22.4	-	
Vert.	5725.0	41.0	-	32.5	3.7	31.1	-	46.2	-	68.2	-	22.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 106 tone-RU index 56				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

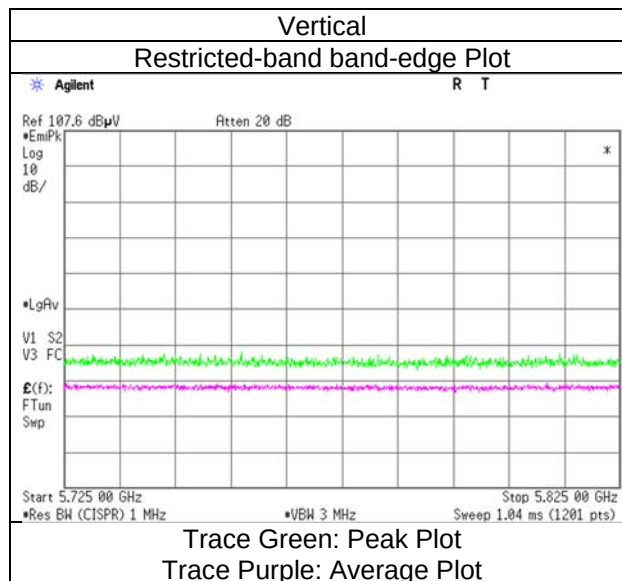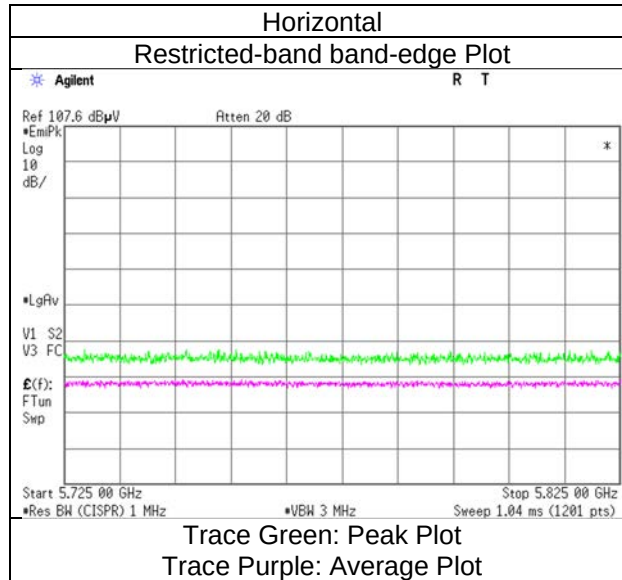

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 106 tone-RU index 53
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.5	-	32.3	3.7	31.0	-	45.4	-	68.2	-	22.8	-	
Hori.	5700.0	40.6	-	32.5	3.7	31.1	-	45.7	-	105.2	-	59.5	-	
Hori.	5720.0	42.1	-	32.5	3.7	31.1	-	47.2	-	110.8	-	63.6	-	
Hori.	5725.0	43.4	-	32.5	3.7	31.1	-	48.6	-	122.2	-	73.6	-	
Vert.	5650.0	40.8	-	32.3	3.7	31.0	-	45.8	-	68.2	-	22.4	-	
Vert.	5700.0	40.4	-	32.5	3.7	31.1	-	45.6	-	105.2	-	59.7	-	
Vert.	5720.0	41.7	-	32.5	3.7	31.1	-	46.8	-	110.8	-	64.0	-	
Vert.	5725.0	43.1	-	32.5	3.7	31.1	-	48.3	-	122.2	-	73.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 106 tone-RU index 53				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

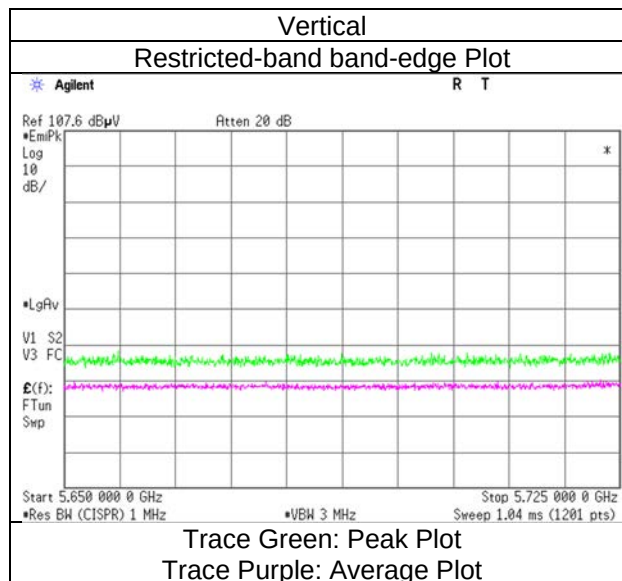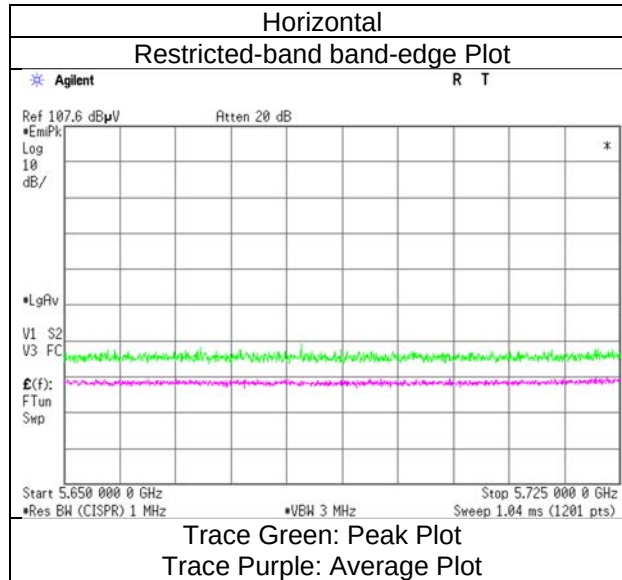

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 106 tone-RU index 56
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.6	-	32.8	3.8	31.1	-	46.0	-	122.2	-	76.2	-	
Hori.	5855.0	40.9	-	32.8	3.8	31.1	-	46.3	-	110.8	-	64.5	-	
Hori.	5875.0	40.5	-	32.8	3.8	31.1	-	45.9	-	105.2	-	59.3	-	
Hori.	5925.0	40.4	-	32.8	3.8	31.1	-	45.8	-	68.2	-	22.4	-	
Vert.	5850.0	40.2	-	32.8	3.8	31.1	-	45.6	-	122.2	-	76.6	-	
Vert.	5855.0	40.7	-	32.8	3.8	31.1	-	46.1	-	110.8	-	64.7	-	
Vert.	5875.0	40.4	-	32.8	3.8	31.1	-	45.9	-	105.2	-	59.3	-	
Vert.	5925.0	40.5	-	32.8	3.8	31.1	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 106 tone-RU index 56				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

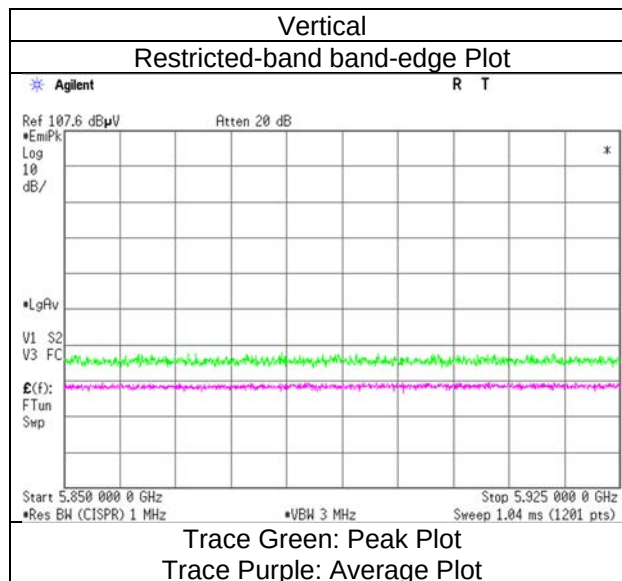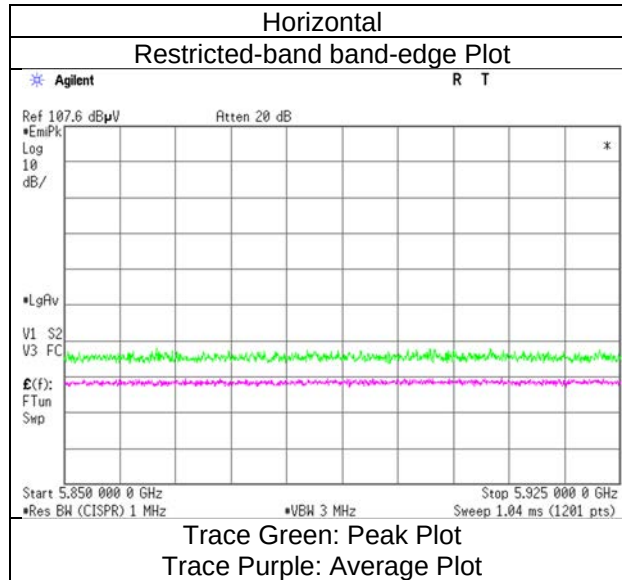

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5150.0	43.9	34.0	32.1	3.5	30.9	-	48.6	38.7	73.9	53.9	25.3	15.2	
Vert.	5150.0	44.2	34.3	32.1	3.5	30.9	-	48.9	39.0	73.9	53.9	25.0	14.9	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

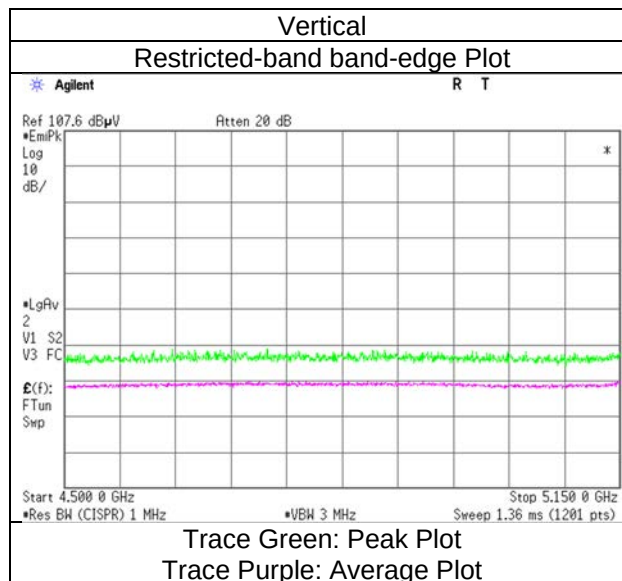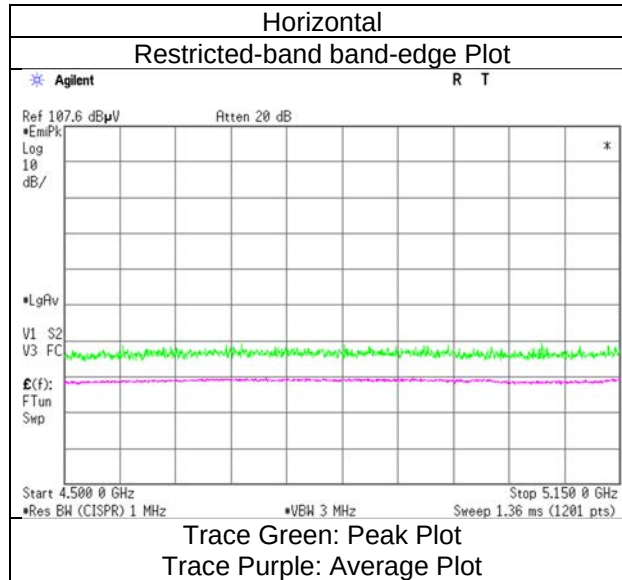

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 242 tone-RU index 62
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz
August 17, 2026	SAC4	24 deg. C	53 % RH	Takumi Nishida	10 GHz to 18 GHz
August 17, 2026	SAC4	25 deg. C	57 % RH	Nachi Konegawa	Above 18 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	45.1	33.6	31.7	3.6	31.0	-	49.5	38.0	73.9	53.9	24.4	15.9	
Hori.	10620.0	42.9	34.6	36.5	-4.0	32.8	-	42.6	34.3	73.9	53.9	31.3	19.6	Floor noise
Hori.	15930.0	43.5	35.4	39.9	-2.8	32.4	-	48.3	40.2	73.9	53.9	25.6	13.7	Floor noise
Hori.	37170.0	64.2	-	43.8	4.6	73.4	-	39.2	-	68.2	-	29.0	-	
Vert.	5350.0	45.4	33.9	31.7	3.6	31.0	-	49.8	38.3	73.9	53.9	24.1	15.7	
Vert.	10620.0	42.8	34.5	36.5	-4.0	32.8	-	42.5	34.2	73.9	53.9	31.4	19.7	Floor noise
Vert.	15930.0	43.5	35.3	39.9	-2.8	32.4	-	48.3	40.1	73.9	53.9	25.6	13.8	Floor noise
Vert.	37170.0	66.4	-	43.8	4.6	73.4	-	41.3	-	68.2	-	26.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 242 tone-RU index 62				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

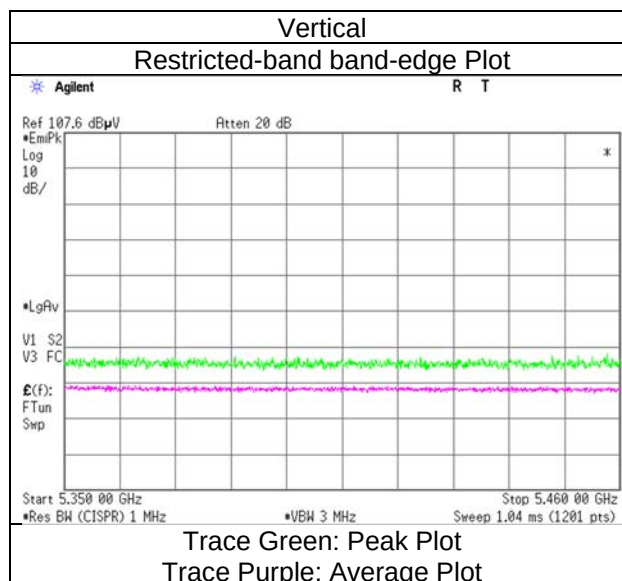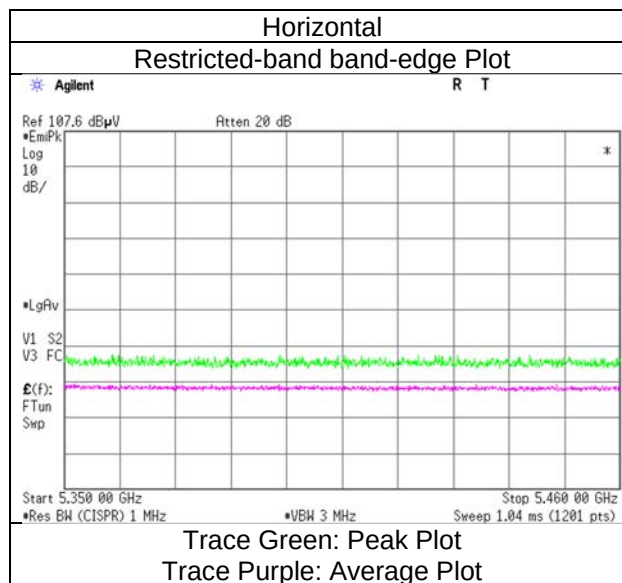

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
August 17, 2026	SAC4	24 deg. C	53 % RH	Takumi Nishida	10 GHz to 18 GHz
August 17, 2026	SAC4	25 deg. C	57 % RH	Nachi Konegawa	Above 18 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.9	32.3	32.0	3.6	31.0	-	46.5	37.0	68.2	53.9	21.7	16.9	
Hori.	5470.0	41.8	-	32.0	3.6	31.0	-	46.4	-	68.2	-	21.8	-	
Hori.	11020.0	43.0	34.8	37.6	-3.9	32.9	-	43.8	35.6	73.9	53.9	30.1	18.3	Floor noise
Hori.	16530.0	43.6	-	39.9	-2.6	32.4	-	48.5	-	68.2	-	19.8	-	Floor noise
Hori.	38570.0	67.6	-	43.8	4.9	73.4	-	42.8	-	68.2	-	25.4	-	
Vert.	5460.0	41.7	32.8	32.0	3.6	31.0	-	46.3	37.5	68.2	53.9	21.9	16.4	
Vert.	5470.0	43.3	-	32.0	3.6	31.0	-	47.9	-	68.2	-	20.3	-	
Vert.	11020.0	42.9	34.7	37.6	-3.9	32.9	-	43.7	35.5	73.9	53.9	30.2	18.4	Floor noise
Vert.	16530.0	43.5	-	39.9	-2.6	32.4	-	48.4	-	68.2	-	19.9	-	Floor noise
Vert.	38570.0	70.8	-	43.8	4.9	73.4	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

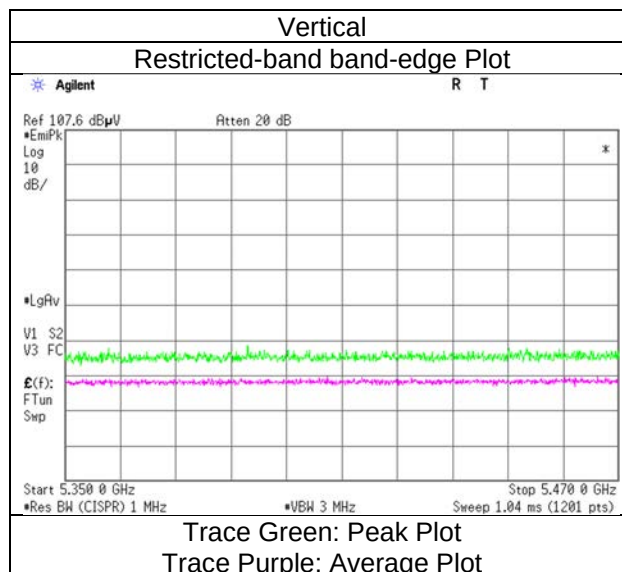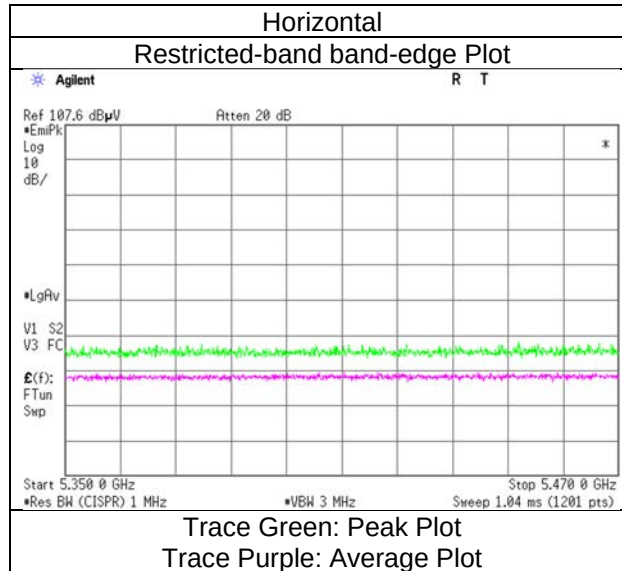

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 242 tone-RU index 62
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
August 17, 2026	SAC4	24 deg. C	53 % RH	Takumi Nishida	10 GHz to 18 GHz
August 17, 2026	SAC4	25 deg. C	57 % RH	Nachi Konegawa	Above 18 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	40.9	-	32.5	3.7	31.1	-	46.1	-	68.2	-	22.1	-	
Hori.	11340.0	42.9	34.2	37.7	-3.8	32.8	-	44.0	35.3	73.9	53.9	29.9	18.6	Floor noise
Hori.	17010.0	43.4	-	39.8	-2.4	32.5	-	48.3	-	68.2	-	19.9	-	Floor noise
Hori.	39690.0	67.8	-	43.9	5.1	73.5	-	43.3	-	68.2	-	24.9	-	
Vert.	5725.0	41.8	-	32.5	3.7	31.1	-	47.0	-	68.2	-	21.2	-	
Vert.	11340.0	42.8	34.1	37.7	-3.8	32.8	-	43.9	35.2	73.9	53.9	30.0	18.7	Floor noise
Vert.	17010.0	43.3	-	39.8	-2.4	32.5	-	48.2	-	68.2	-	20.0	-	Floor noise
Vert.	39690.0	68.4	-	43.9	5.1	73.5	-	43.9	-	68.2	-	24.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 10 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 242 tone-RU index 62				
------	--	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

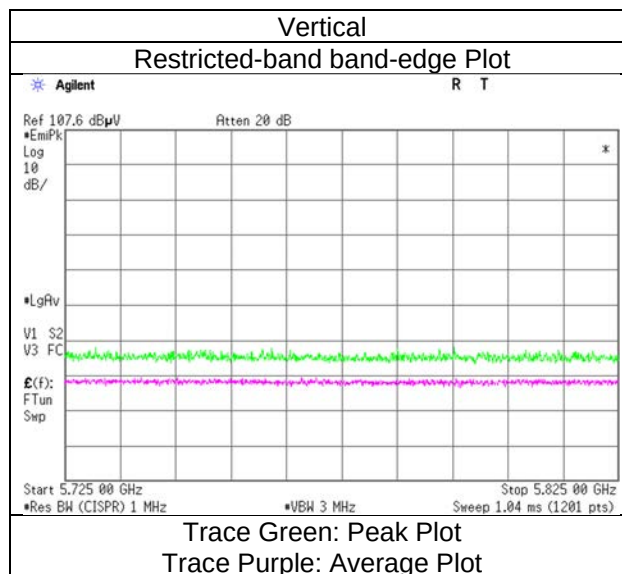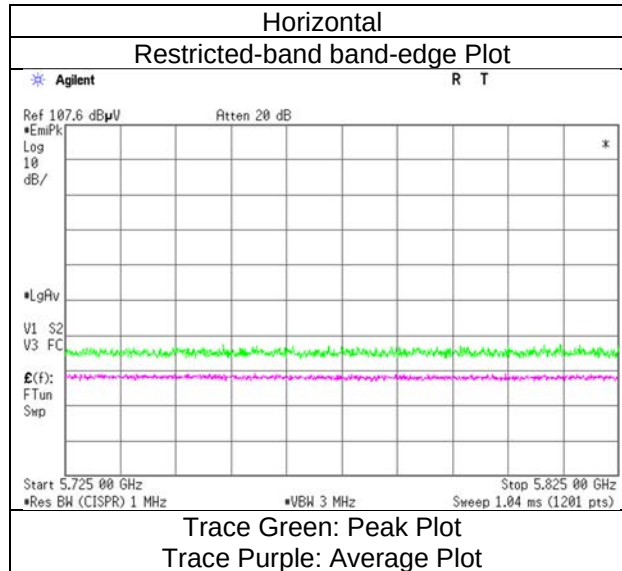

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 242 tone-RU index 61
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.6	-	32.3	3.7	31.0	-	45.5	-	68.2	-	22.7	-	
Hori.	5700.0	41.0	-	32.5	3.7	31.1	-	46.1	-	105.2	-	59.1	-	
Hori.	5720.0	44.2	-	32.5	3.7	31.1	-	49.4	-	110.8	-	61.5	-	
Hori.	5725.0	46.2	-	32.5	3.7	31.1	-	51.4	-	122.2	-	70.8	-	
Vert.	5650.0	40.3	-	32.3	3.7	31.0	-	45.2	-	68.2	-	23.0	-	
Vert.	5700.0	40.8	-	32.5	3.7	31.1	-	45.9	-	105.2	-	59.3	-	
Vert.	5720.0	42.1	-	32.5	3.7	31.1	-	47.3	-	110.8	-	63.5	-	
Vert.	5725.0	43.7	-	32.5	3.7	31.1	-	48.9	-	122.2	-	73.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 242 tone-RU index 61				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

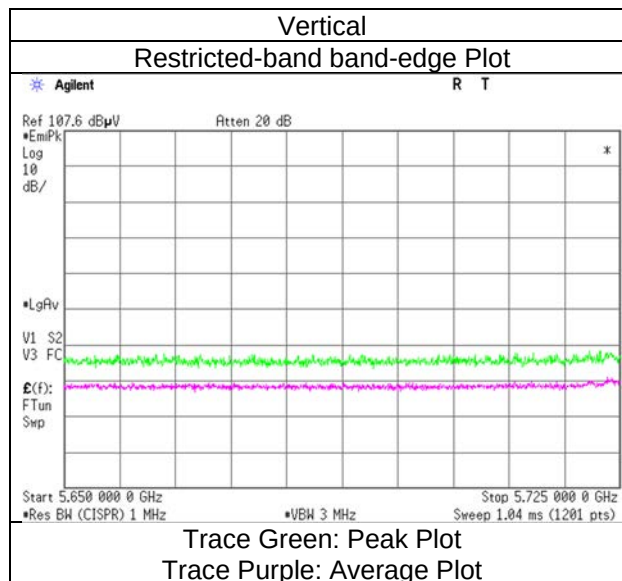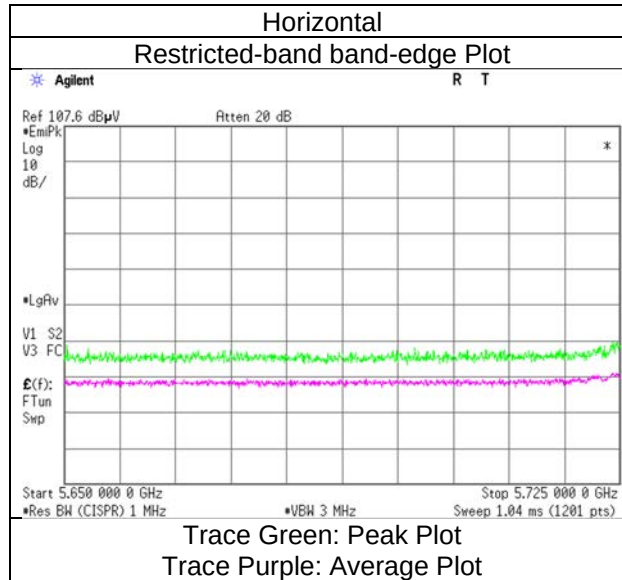

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 242 tone-RU index 62
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.4	-	32.8	3.8	31.1	-	45.9	-	122.2	-	76.3	-	
Hori.	5855.0	40.3	-	32.8	3.8	31.1	-	45.8	-	110.8	-	65.0	-	
Hori.	5875.0	40.1	-	32.8	3.8	31.1	-	45.6	-	105.2	-	59.6	-	
Hori.	5925.0	40.4	-	32.8	3.8	31.1	-	45.9	-	68.2	-	22.3	-	
Vert.	5850.0	40.3	-	32.8	3.8	31.1	-	45.7	-	122.2	-	76.5	-	
Vert.	5855.0	40.3	-	32.8	3.8	31.1	-	45.7	-	110.8	-	65.1	-	
Vert.	5875.0	41.1	-	32.8	3.8	31.1	-	46.6	-	105.2	-	58.7	-	
Vert.	5925.0	40.6	-	32.8	3.8	31.1	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 242 tone-RU index 62				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

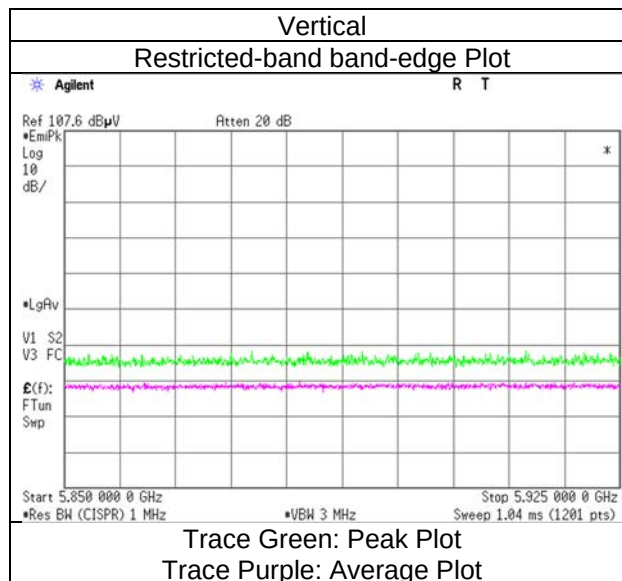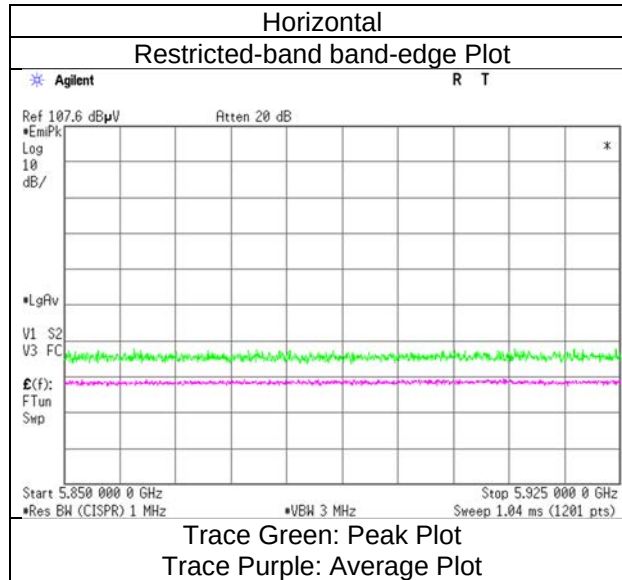

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	47.0	36.1	32.1	3.5	30.9	-	51.7	40.8	73.9	53.9	22.2	13.1	
Hori.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Hori.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Hori.	36330.0	65.2	-	43.6	4.4	74.3	-	38.9	-	68.2	-	29.3	-	
Vert.	5150.0	47.2	36.5	32.1	3.5	30.9	-	51.9	41.2	73.9	53.9	22.0	12.7	
Vert.	10380.0	43.3	-	35.9	6.7	36.8	-	49.1	-	68.2	-	19.2	-	Floor noise
Vert.	15570.0	43.6	36.0	39.1	8.1	38.1	-	52.7	45.1	73.9	53.9	21.2	8.8	Floor noise
Vert.	36330.0	65.8	-	43.6	4.4	74.3	-	39.6	-	68.2	-	28.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5190 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

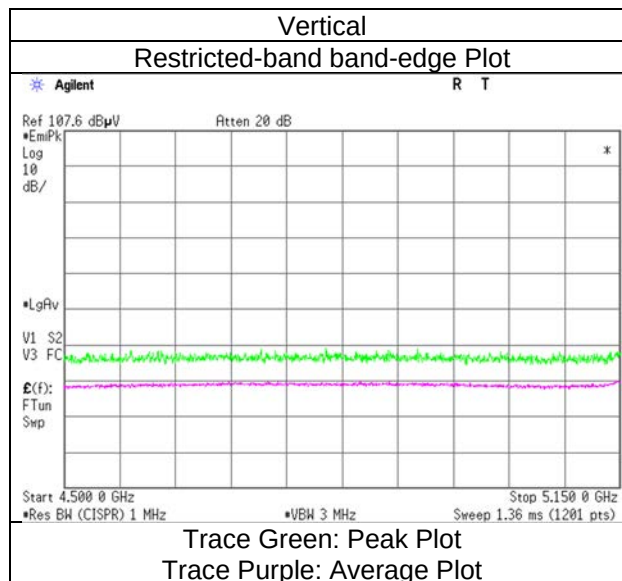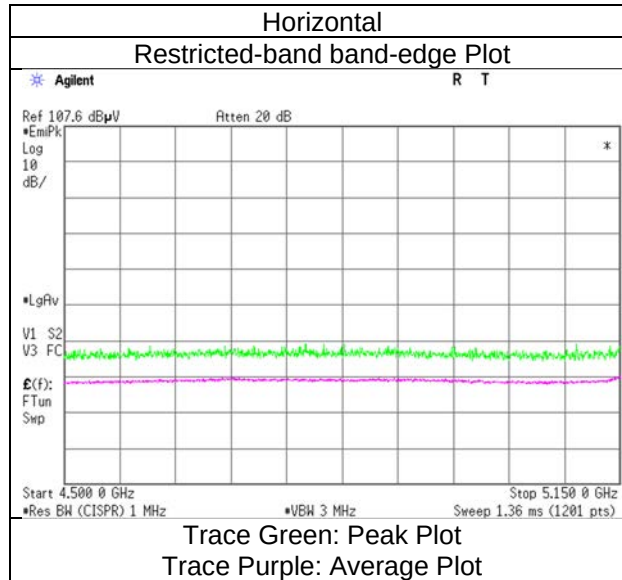

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5270 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Hori.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Hori.	36890.0	63.2	-	43.8	4.5	73.6	-	37.9	-	68.2	-	30.3	-	
Vert.	10540.0	42.8	-	36.0	6.7	36.7	-	48.8	-	68.2	-	19.4	-	Floor noise
Vert.	15810.0	44.1	36.1	39.4	8.1	38.3	-	53.3	45.3	73.9	53.9	20.6	8.6	Floor noise
Vert.	36890.0	66.3	-	43.8	4.5	73.6	-	40.9	-	68.2	-	27.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	56.5	45.3	31.7	3.6	31.0	-	60.9	49.7	73.9	53.9	13.0	4.2	
Hori.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Hori.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Hori.	37170.0	65.3	-	43.8	4.6	73.4	-	40.3	-	68.2	-	27.9	-	
Vert.	5350.0	56.7	45.7	31.7	3.6	31.0	-	61.1	50.1	73.9	53.9	12.8	3.8	
Vert.	10620.0	43.3	35.3	36.3	6.8	36.7	-	49.6	41.6	73.9	53.9	24.3	12.3	Floor noise
Vert.	15930.0	43.9	36.3	39.6	8.1	38.3	-	53.2	45.6	73.9	53.9	20.7	8.3	Floor noise
Vert.	37170.0	67.0	-	43.8	4.6	73.4	-	42.0	-	68.2	-	26.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5310 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	22 deg. C	51 % RH	Takumi Nishida	1 GHz to 10 GHz

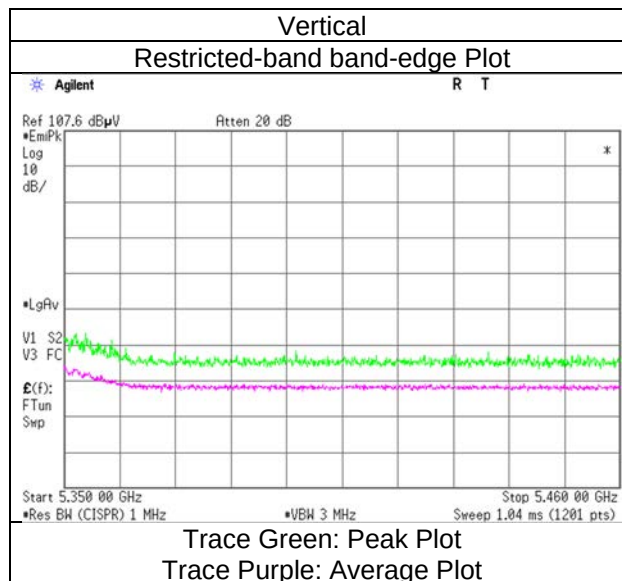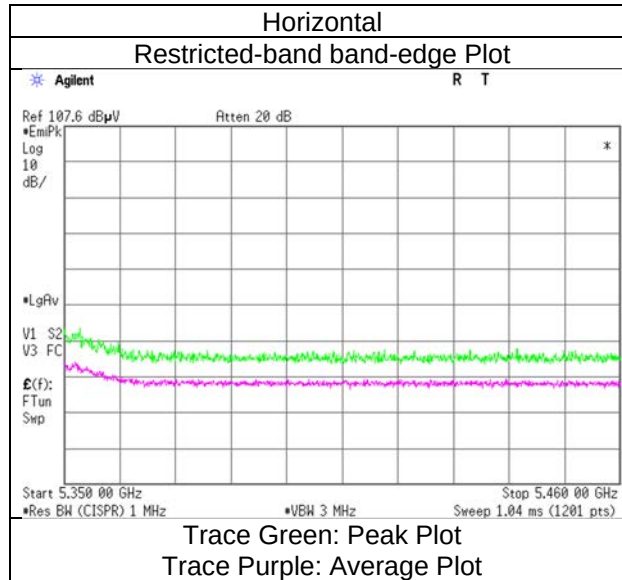

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	44.3	33.7	32.0	3.6	31.0	-	48.9	38.3	68.2	53.9	19.3	15.6	
Hori.	5470.0	47.9	-	32.0	3.6	31.0	-	52.6	-	68.2	-	15.6	-	
Hori.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Hori.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Hori.	38570.0	68.0	-	43.8	4.9	73.4	-	43.3	-	68.2	-	24.9	-	
Vert.	5460.0	47.5	32.3	32.0	3.6	31.0	-	52.2	37.0	68.2	53.9	16.1	16.9	
Vert.	5470.0	51.1	-	32.0	3.6	31.0	-	55.7	-	68.2	-	12.5	-	
Vert.	11020.0	42.4	35.5	37.3	6.8	36.7	-	49.8	43.0	73.9	53.9	24.1	11.0	Floor noise
Vert.	16530.0	44.8	-	39.5	8.2	38.6	-	53.9	-	68.2	-	14.3	-	Floor noise
Vert.	38570.0	70.6	-	43.8	4.9	73.4	-	45.8	-	68.2	-	22.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5510 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

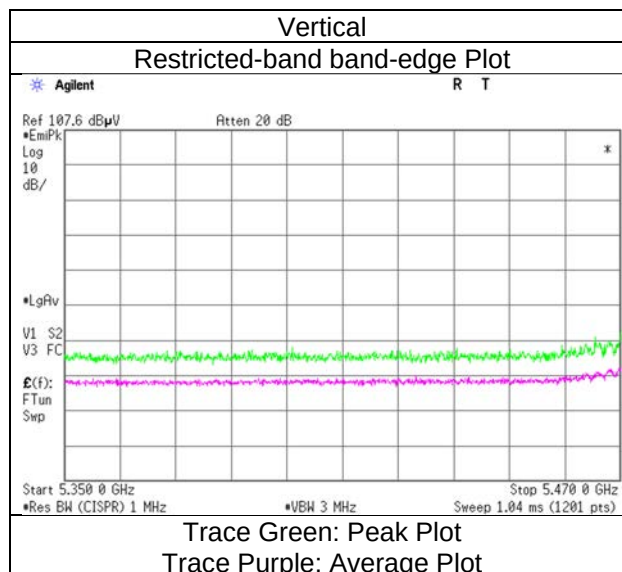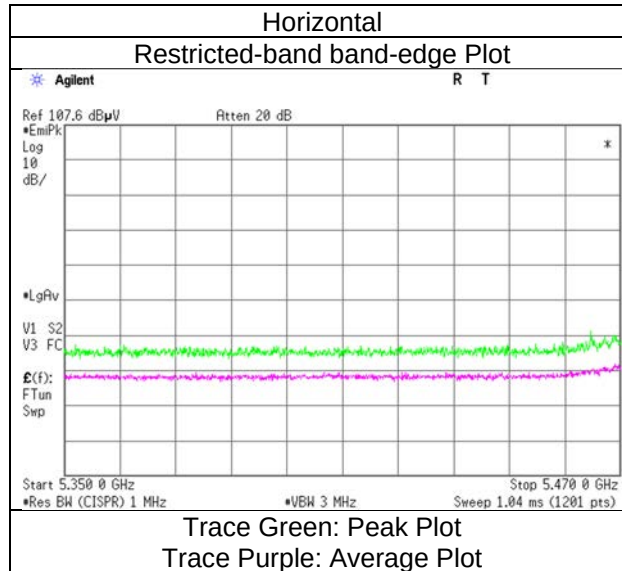

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5590 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Hori.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Hori.	39130.0	66.1	60.5	43.8	5.0	73.9	-	41.0	35.4	73.9	53.9	32.9	18.5	
Vert.	11180.0	42.7	36.4	37.2	6.9	36.7	-	50.1	43.8	73.9	53.9	23.8	10.1	Floor noise
Vert.	16770.0	44.6	-	39.3	8.2	38.6	-	53.4	-	68.2	-	14.8	-	Floor noise
Vert.	39130.0	69.2	66.2	43.8	5.0	73.9	-	44.2	41.1	73.9	53.9	29.8	12.8	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	41.8	-	32.5	3.7	31.1	-	47.0	-	68.2	-	21.2	-	
Hori.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Hori.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Hori.	39690.0	65.8	59.6	43.9	5.1	73.5	-	41.3	35.1	73.9	53.9	32.7	18.8	
Vert.	5725.0	41.4	-	32.5	3.7	31.1	-	46.6	-	68.2	-	21.6	-	
Vert.	11340.0	43.0	35.8	37.3	6.9	36.7	-	50.5	43.2	73.9	53.9	23.4	10.7	Floor noise
Vert.	17010.0	43.2	-	39.4	8.2	38.6	-	52.1	-	68.2	-	16.1	-	Floor noise
Vert.	39690.0	70.1	66.8	43.9	5.1	73.5	-	45.6	42.3	73.9	53.9	28.3	11.6	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5670 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

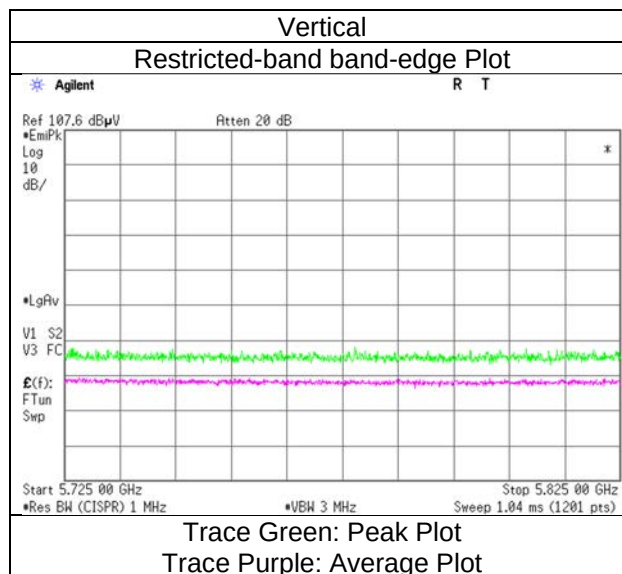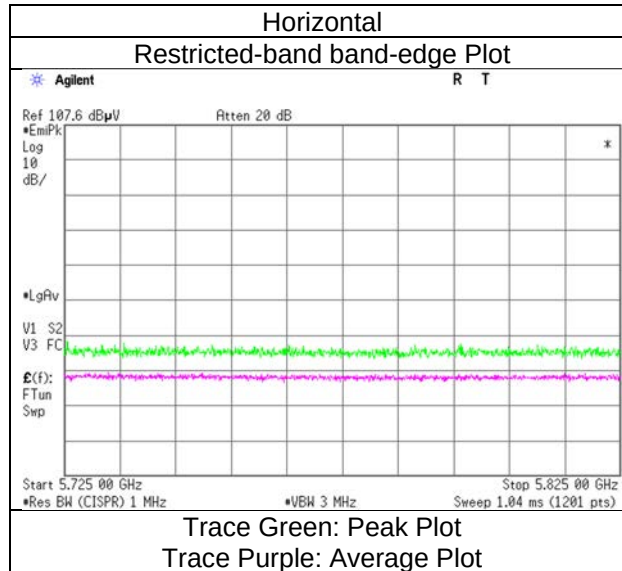

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	39.8	-	32.3	3.7	31.0	-	44.8	-	68.2	-	23.4	-	
Hori.	5700.0	41.1	-	32.5	3.7	31.1	-	46.2	-	105.2	-	59.0	-	
Hori.	5720.0	43.8	-	32.5	3.7	31.1	-	48.9	-	110.8	-	61.9	-	
Hori.	5725.0	45.2	-	32.5	3.7	31.1	-	50.3	-	122.2	-	71.9	-	
Hori.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Hori.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise
Vert.	5650.0	40.2	-	32.3	3.7	31.0	-	45.1	-	68.2	-	23.1	-	
Vert.	5700.0	40.7	-	32.5	3.7	31.1	-	45.9	-	105.2	-	59.4	-	
Vert.	5720.0	42.9	-	32.5	3.7	31.1	-	48.1	-	110.8	-	62.7	-	
Vert.	5725.0	44.2	-	32.5	3.7	31.1	-	49.4	-	122.2	-	72.8	-	
Vert.	11510.0	43.4	35.1	37.3	6.9	36.7	-	50.9	42.7	73.9	53.9	23.0	11.3	Floor noise
Vert.	17265.0	44.8	-	39.8	8.2	38.6	-	54.1	-	68.2	-	14.1	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5755 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

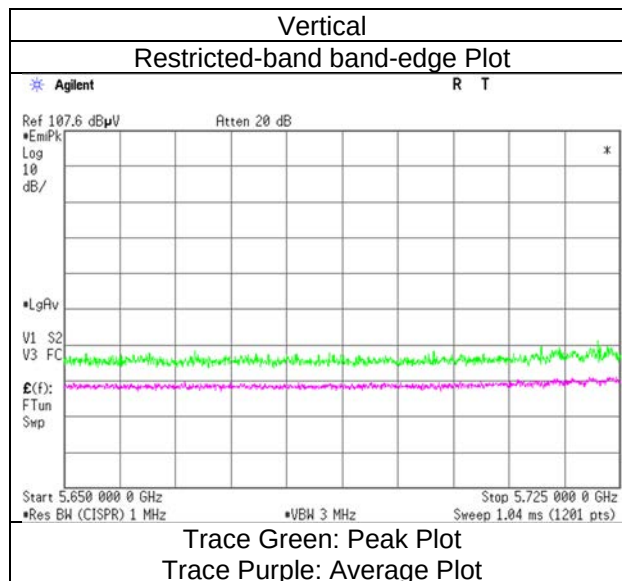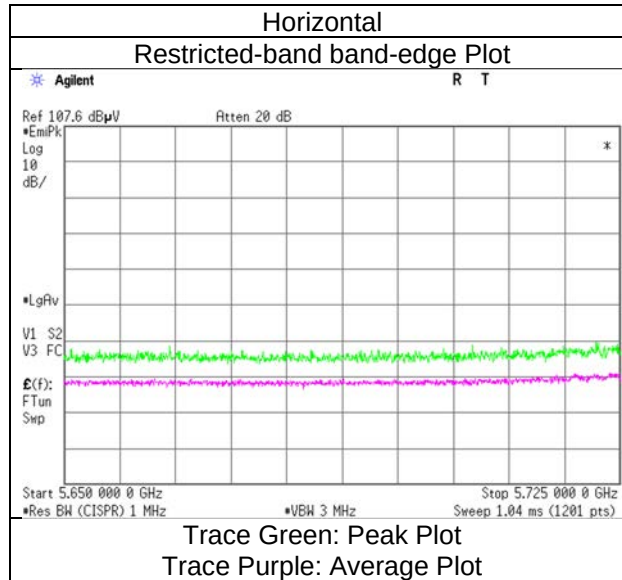

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 484 tone-RU index 65
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz
April 14, 2026	SAC4	20 deg. C	58 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 19, 2026	SAC4	21 deg. C	58 % RH	Yuta Moriya	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.2	-	32.8	3.8	31.1	-	45.6	-	122.2	-	76.6	-	
Hori.	5855.0	40.3	-	32.8	3.8	31.1	-	45.7	-	110.8	-	65.1	-	
Hori.	5875.0	40.6	-	32.8	3.8	31.1	-	46.0	-	105.2	-	59.2	-	
Hori.	5925.0	40.6	-	32.8	3.8	31.1	-	46.1	-	68.2	-	22.1	-	
Hori.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Hori.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise
Vert.	5850.0	41.2	-	32.8	3.8	31.1	-	46.6	-	122.2	-	75.6	-	
Vert.	5855.0	40.6	-	32.8	3.8	31.1	-	46.0	-	110.8	-	64.8	-	
Vert.	5875.0	40.6	-	32.8	3.8	31.1	-	46.0	-	105.2	-	59.2	-	
Vert.	5925.0	40.5	-	32.8	3.8	31.1	-	45.9	-	68.2	-	22.3	-	
Vert.	11590.0	43.2	35.7	37.3	6.9	36.7	-	50.8	43.2	73.9	53.9	23.2	10.7	Floor noise
Vert.	17385.0	43.2	-	39.9	8.3	38.6	-	52.8	-	68.2	-	15.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-40 (OFDMA) 5795 MHz 484 tone-RU index 65				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 6, 2026	SAC4	20 deg. C	52 % RH	Junki Nagatomi	1 GHz to 10 GHz

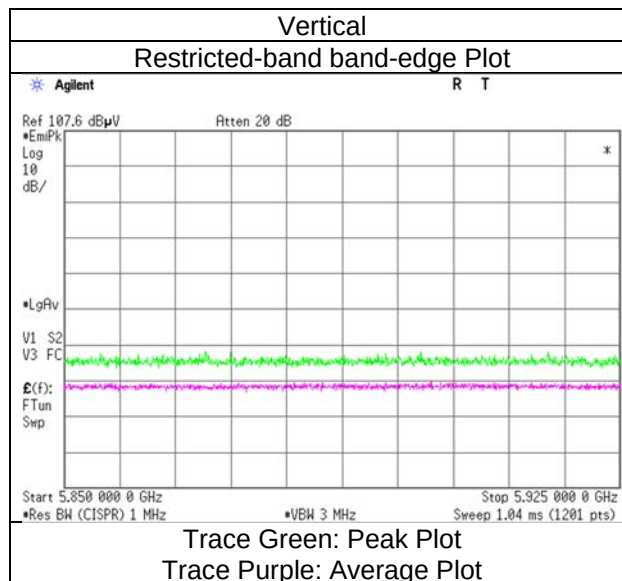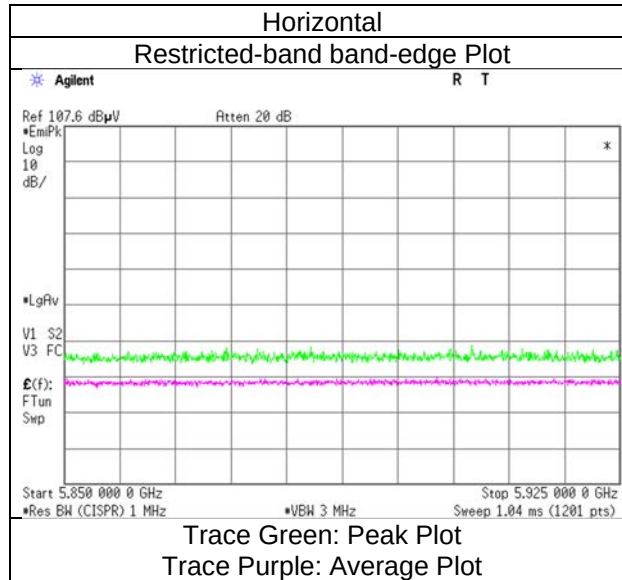

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80 5210 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	48.4	38.1	31.9	3.6	32.4	3.7	51.5	44.8	73.9	53.9	22.4	9.1	*1)
Hori.	10420.0	43.4	-	35.9	6.7	36.8	-	49.2	-	68.2	-	19.1	-	Floor noise
Hori.	15630.0	43.6	36.2	39.1	8.1	38.1	-	52.7	45.3	73.9	53.9	21.3	8.6	Floor noise
Hori.	36470.0	65.2	57.6	43.7	4.4	74.1	3.7	39.2	35.3	73.9	53.9	34.7	18.7	*2)
Vert.	5150.0	49.1	38.6	31.9	3.6	32.4	3.7	52.2	45.4	73.9	53.9	21.8	8.5	*1)
Vert.	10420.0	43.4	-	35.9	6.7	36.8	-	49.2	-	68.2	-	19.1	-	Floor noise
Vert.	15630.0	43.6	36.2	39.1	8.1	38.1	-	52.7	45.3	73.9	53.9	21.3	8.6	Floor noise
Vert.	36470.0	66.2	59.4	43.7	4.4	74.1	3.7	40.2	37.1	73.9	53.9	33.7	16.9	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-80 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

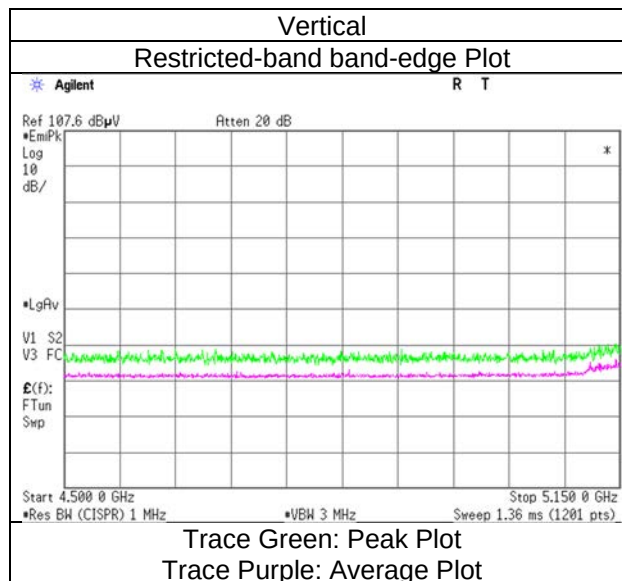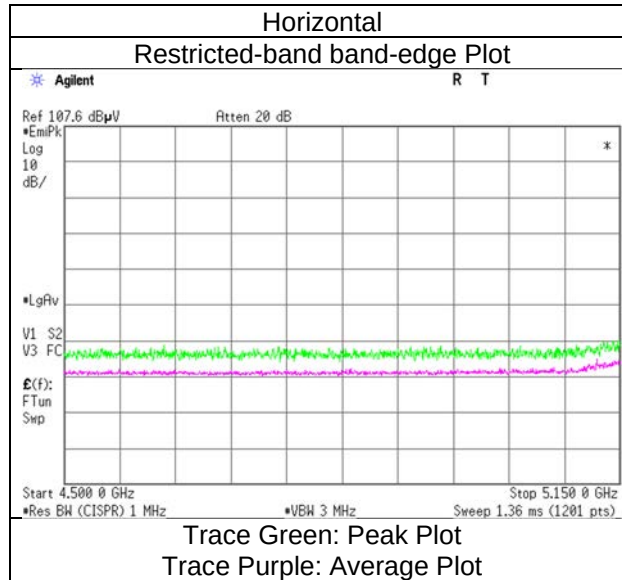

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80 5290 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	50.1	38.4	31.6	3.7	32.3	3.7	53.1	45.0	73.9	53.9	20.8	8.9	*1)
Hori.	10580.0	43.6	-	36.1	6.7	36.7	-	49.7	-	68.2	-	18.5	-	Floor noise
Hori.	15870.0	43.4	36.2	39.5	8.1	38.3	-	52.7	45.5	73.9	53.9	21.2	8.4	Floor noise
Hori.	37030.0	65.6	-	43.8	4.6	73.5	-	40.5	-	68.2	-	27.7	-	-
Vert.	5350.0	52.6	38.9	31.6	3.7	32.3	3.7	55.5	45.5	73.9	53.9	18.4	8.4	*1)
Vert.	10580.0	43.6	-	36.1	6.7	36.7	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	15870.0	43.4	36.2	39.5	8.1	38.3	-	52.7	45.5	73.9	53.9	21.2	8.4	Floor noise
Vert.	37030.0	66.9	-	43.8	4.6	73.5	-	41.8	-	68.2	-	26.4	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-80 5290 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

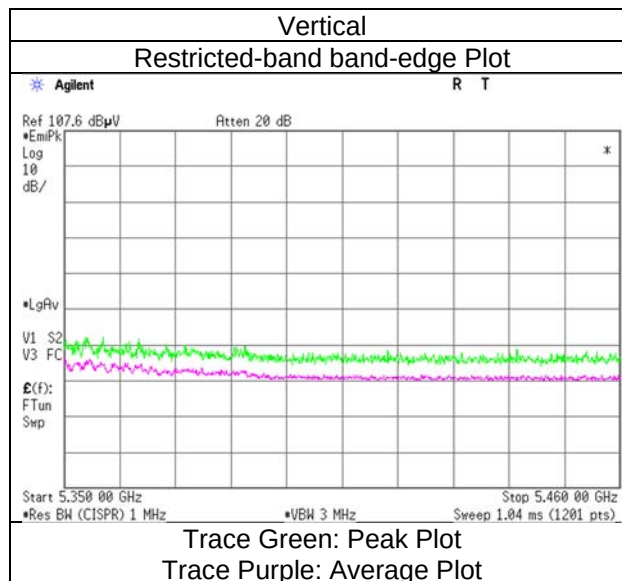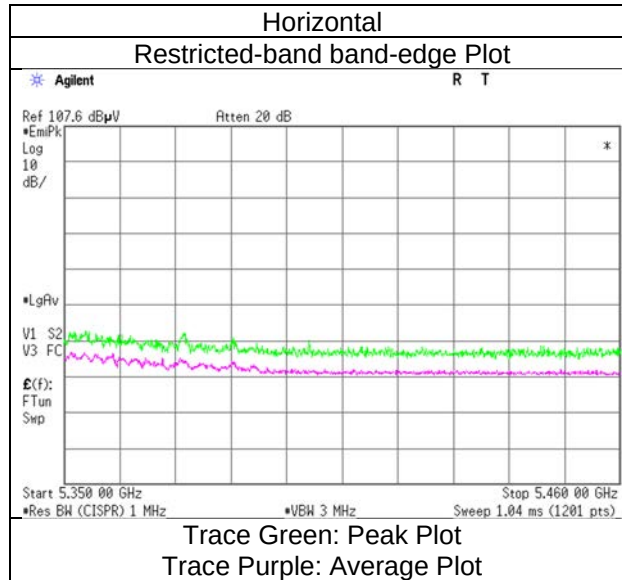

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80 5530 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5451.9	49.8	37.9	31.8	3.7	32.3	3.7	53.0	44.7	73.9	53.9	20.9	9.2	*1)
Hori.	5460.0	47.5	36.9	31.8	3.7	32.3	3.7	50.7	43.8	68.2	53.9	17.5	10.1	*1)
Hori.	5466.1	50.7	-	31.8	3.7	32.3	-	53.9	-	68.2	-	14.4	-	-
Hori.	5470.0	48.7	-	31.8	3.7	32.3	-	51.9	-	68.2	-	16.3	-	-
Hori.	11060.0	43.4	35.6	37.3	6.8	36.7	-	50.8	43.1	73.9	53.9	23.1	10.8	Floor noise
Hori.	16590.0	44.6	-	39.5	8.2	38.6	-	53.7	-	68.2	-	14.6	-	Floor noise
Hori.	38710.0	68.9	61.6	43.8	4.9	73.6	3.7	44.0	40.3	73.9	53.9	29.9	13.6	*2)
Vert.	5454.1	50.9	39.2	31.8	3.7	32.3	3.7	54.1	46.0	73.9	53.9	19.8	7.9	*1)
Vert.	5460.0	51.0	38.1	31.8	3.7	32.3	3.7	54.1	44.9	68.2	53.9	14.1	9.0	*1)
Vert.	5469.5	50.7	-	31.8	3.7	32.3	-	53.9	-	68.2	-	14.3	-	-
Vert.	5470.0	51.0	-	31.8	3.7	32.3	-	54.2	-	68.2	-	14.0	-	-
Vert.	11060.0	43.4	35.6	37.3	6.8	36.7	-	50.8	43.1	73.9	53.9	23.1	10.8	Floor noise
Vert.	16590.0	44.6	-	39.5	8.2	38.6	-	53.7	-	68.2	-	14.6	-	Floor noise
Vert.	38710.0	71.0	66.1	43.8	4.9	73.6	3.7	46.1	44.9	73.9	53.9	27.8	9.0	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-80 5530 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

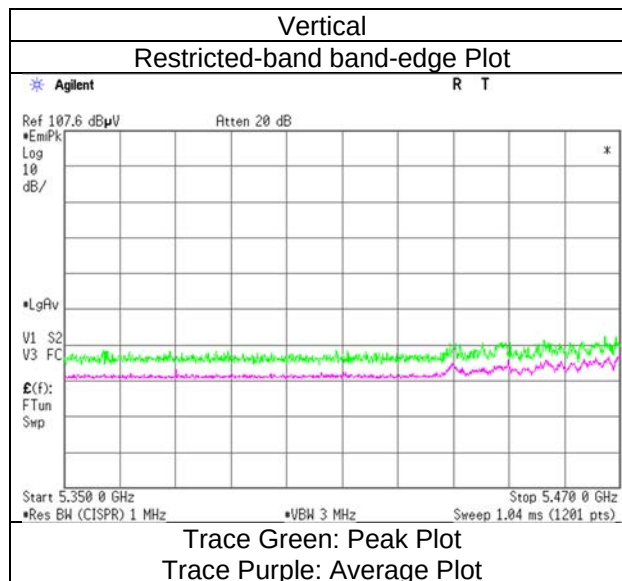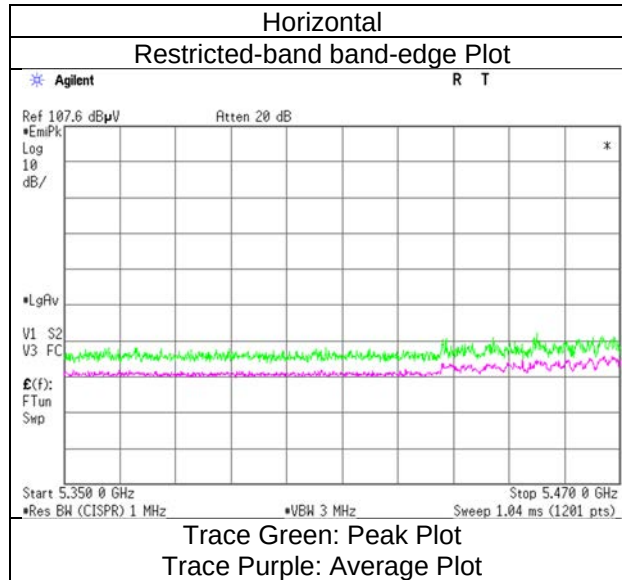

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80 5610 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.9	-	31.9	3.8	32.3	-	47.3	-	68.2	-	20.9	-	
Hori.	11220.0	43.8	35.9	37.2	6.9	36.7	-	51.2	43.2	73.9	53.9	22.7	10.7	Floor noise
Hori.	16830.0	44.8	-	39.3	8.2	38.6	-	53.7	-	68.2	-	14.5	-	Floor noise
Hori.	39270.0	68.9	62.4	43.8	5.0	73.8	3.7	43.9	41.1	73.9	53.9	30.0	12.8	*2)
Vert.	5725.0	44.0	-	31.9	3.8	32.3	-	47.5	-	68.2	-	20.7	-	
Vert.	11220.0	43.8	35.9	37.2	6.9	36.7	-	51.2	43.2	73.9	53.9	22.7	10.7	Floor noise
Vert.	16830.0	44.8	-	39.3	8.2	38.6	-	53.7	-	68.2	-	14.5	-	Floor noise
Vert.	39270.0	71.1	64.5	43.8	5.0	73.8	3.7	46.1	43.2	73.9	53.9	27.8	10.7	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-80 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

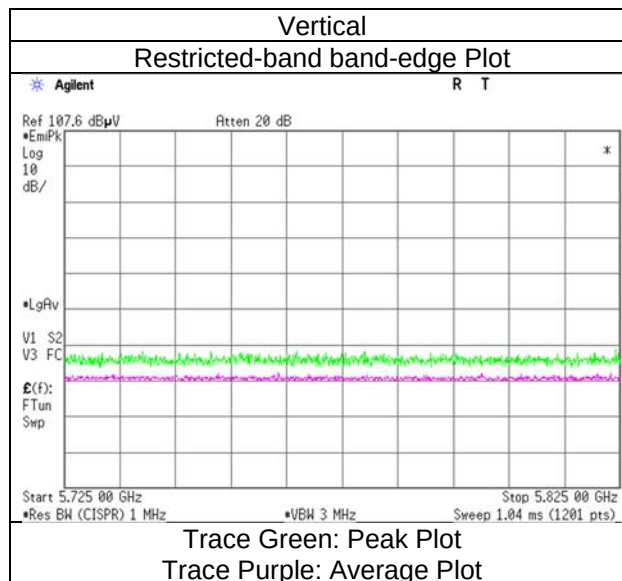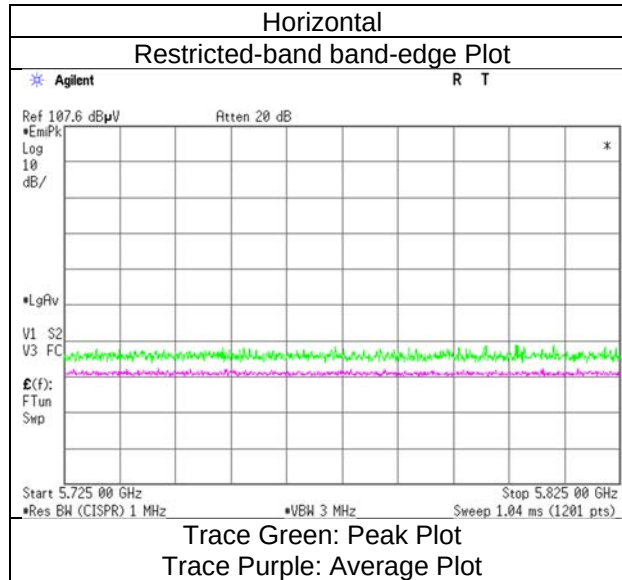

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ac-80 5775 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	43.5	-	31.8	3.8	32.3	-	46.7	-	68.2	-	21.5	-	
Hori.	5700.0	44.7	-	31.9	3.8	32.3	-	48.0	-	105.2	-	57.2	-	
Hori.	5720.0	45.2	-	31.9	3.8	32.3	-	48.6	-	110.8	-	62.2	-	
Hori.	5725.0	46.2	-	31.9	3.8	32.3	-	49.6	-	122.2	-	72.6	-	
Hori.	5850.0	44.3	-	32.3	3.9	32.3	-	48.1	-	122.2	-	74.1	-	
Hori.	5855.0	44.1	-	32.3	3.9	32.3	-	47.9	-	110.8	-	62.9	-	
Hori.	5875.0	43.9	-	32.3	3.9	32.3	-	47.8	-	105.2	-	57.4	-	
Hori.	5925.0	43.8	-	32.4	3.9	32.3	-	47.7	-	68.2	-	20.5	-	
Hori.	11550.0	43.8	35.2	37.3	6.9	36.7	-	51.4	42.7	73.9	53.9	22.5	11.2	Floor noise
Hori.	17325.0	44.8	-	39.8	8.2	38.6	-	54.3	-	68.2	-	14.0	-	Floor noise
Vert.	5650.0	43.1	-	31.8	3.8	32.3	-	46.3	-	68.2	-	21.9	-	
Vert.	5700.0	43.6	-	31.9	3.8	32.3	-	47.0	-	105.2	-	58.2	-	
Vert.	5720.0	45.9	-	31.9	3.8	32.3	-	49.3	-	110.8	-	61.5	-	
Vert.	5725.0	45.9	-	31.9	3.8	32.3	-	49.3	-	122.2	-	72.9	-	
Vert.	5850.0	45.1	-	32.3	3.9	32.3	-	48.9	-	122.2	-	73.3	-	
Vert.	5855.0	43.6	-	32.3	3.9	32.3	-	47.4	-	110.8	-	63.4	-	
Vert.	5875.0	43.5	-	32.3	3.9	32.3	-	47.3	-	105.2	-	57.9	-	
Vert.	5925.0	43.4	-	32.4	3.9	32.3	-	47.4	-	68.2	-	20.8	-	
Vert.	11550.0	43.8	35.2	37.3	6.9	36.7	-	51.4	42.7	73.9	53.9	22.5	11.2	Floor noise
Vert.	17325.0	44.8	-	39.8	8.2	38.6	-	54.3	-	68.2	-	14.0	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ac-80 5775 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

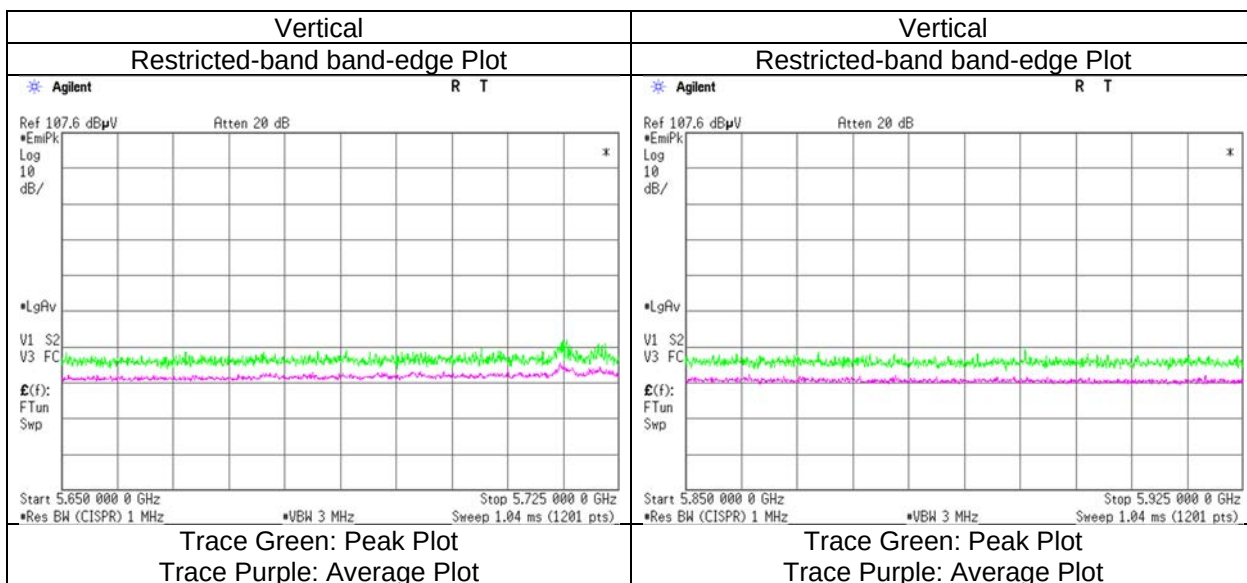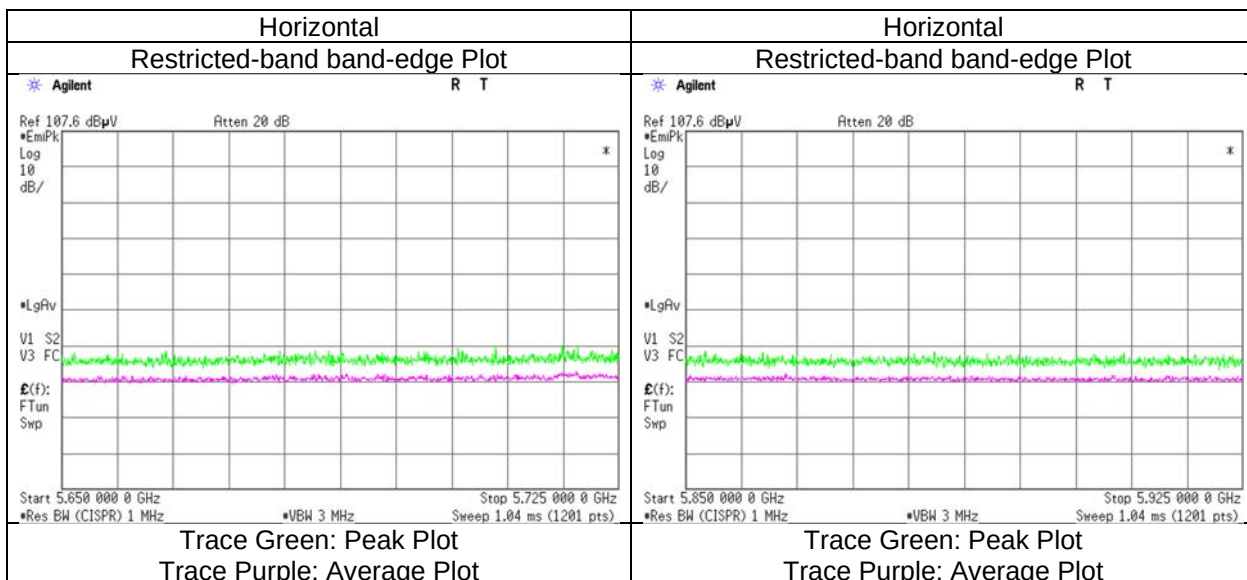

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 5210 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	47.6	37.1	31.9	3.6	32.4	3.5	50.7	43.7	73.9	53.9	23.2	10.2	*1)
Hori.	10420.0	43.4	-	35.9	6.7	36.8	-	49.2	-	68.2	-	19.1	-	Floor noise
Hori.	15630.0	43.6	36.2	39.1	8.1	38.1	-	52.7	45.3	73.9	53.9	21.3	8.6	Floor noise
Hori.	36470.0	65.0	57.5	43.7	4.4	74.1	3.5	39.0	35.0	73.9	53.9	34.9	18.9	*2)
Vert.	5150.0	48.9	37.5	31.9	3.6	32.4	3.5	52.0	44.1	73.9	53.9	21.9	9.8	*1)
Vert.	10420.0	43.4	-	35.9	6.7	36.8	-	49.2	-	68.2	-	19.1	-	Floor noise
Vert.	15630.0	43.6	36.2	39.1	8.1	38.1	-	52.7	45.3	73.9	53.9	21.3	8.6	Floor noise
Vert.	36470.0	65.7	59.4	43.7	4.4	74.1	3.5	39.7	36.9	73.9	53.9	34.2	17.0	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-80 5210 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

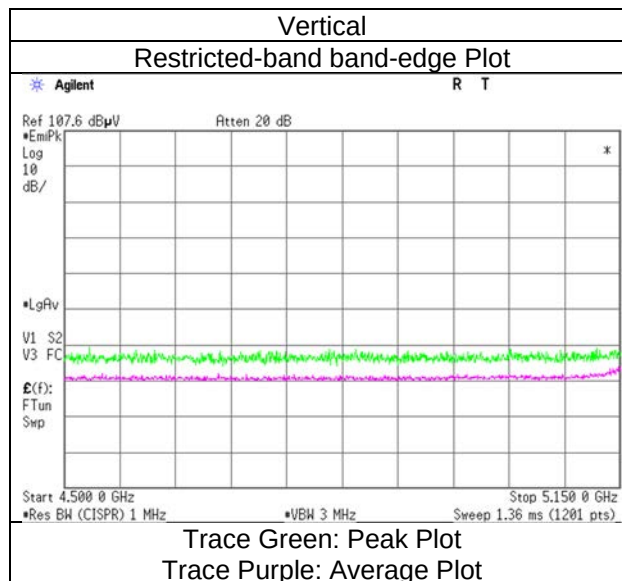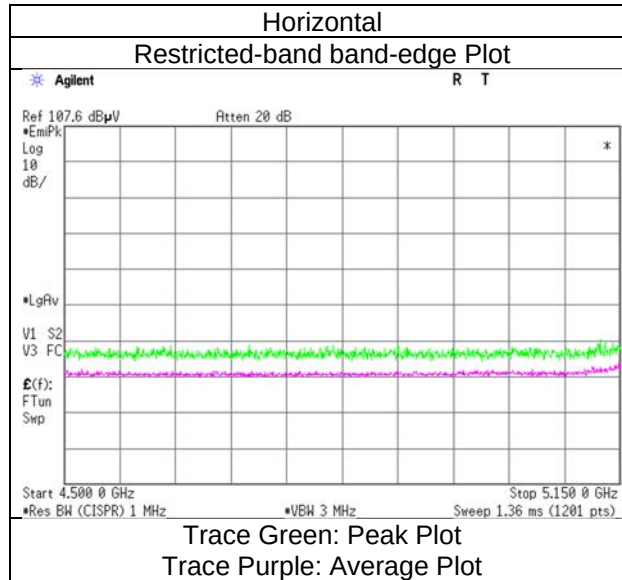

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 5290 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	53.6	40.8	31.6	3.7	32.3	3.5	56.5	47.3	73.9	53.9	17.4	6.6	*1)
Hori.	10580.0	43.6	-	36.1	6.7	36.7	-	49.7	-	68.2	-	18.5	-	Floor noise
Hori.	15870.0	43.4	36.2	39.5	8.1	38.3	-	52.7	45.5	73.9	53.9	21.2	8.4	Floor noise
Hori.	37030.0	66.0	-	43.8	4.6	73.5	-	40.9	-	68.2	-	27.3	-	-
Vert.	5350.0	51.6	39.8	31.6	3.7	32.3	3.5	54.5	46.2	73.9	53.9	19.4	7.7	*1)
Vert.	10580.0	43.6	-	36.1	6.7	36.7	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	15870.0	43.4	36.2	39.5	8.1	38.3	-	52.7	45.5	73.9	53.9	21.2	8.4	Floor noise
Vert.	37030.0	67.4	-	43.8	4.6	73.5	-	42.3	-	68.2	-	25.9	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-80 5290 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

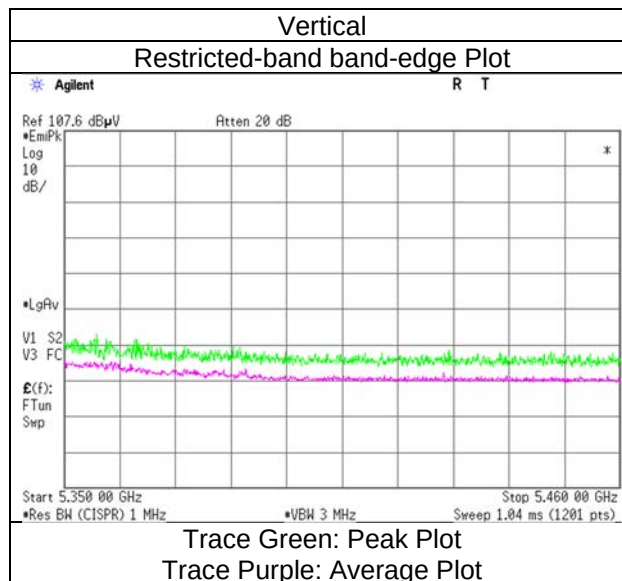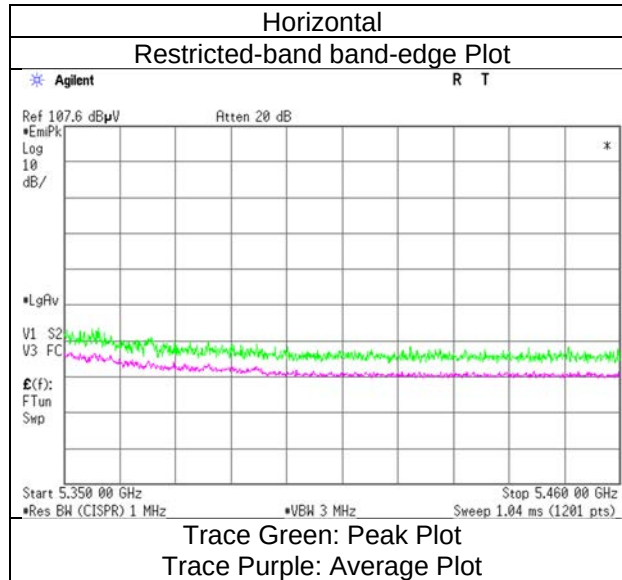

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 5530 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5459.4	48.6	36.7	31.8	3.7	32.3	3.5	51.8	43.4	73.9	53.9	22.1	10.5	*1)
Hori.	5460.0	48.6	37.0	31.8	3.7	32.3	3.5	51.8	43.7	68.2	53.9	16.4	10.2	*1)
Hori.	5466.6	50.5	-	31.8	3.7	32.3	-	53.7	-	68.2	-	14.5	-	-
Hori.	5470.0	50.9	-	31.8	3.7	32.3	-	54.0	-	68.2	-	14.2	-	-
Hori.	11060.0	43.4	35.6	37.3	6.8	36.7	-	50.8	43.1	73.9	53.9	23.1	10.8	Floor noise
Hori.	16590.0	44.6	-	39.5	8.2	38.6	-	53.7	-	68.2	-	14.6	-	Floor noise
Hori.	38710.0	69.0	61.5	43.8	4.9	73.6	3.5	44.1	40.1	73.9	53.9	29.8	13.8	*2)
Vert.	5459.9	48.7	38.5	31.8	3.7	32.3	3.5	51.9	45.2	73.9	53.9	22.0	8.7	*1)
Vert.	5460.0	48.3	38.4	31.8	3.7	32.3	3.5	51.5	45.1	68.2	53.9	16.7	8.8	*1)
Vert.	5469.2	52.1	-	31.8	3.7	32.3	-	55.3	-	68.2	-	12.9	-	-
Vert.	5470.0	52.2	-	31.8	3.7	32.3	-	55.4	-	68.2	-	12.8	-	-
Vert.	11060.0	43.4	35.6	37.3	6.8	36.7	-	50.8	43.1	73.9	53.9	23.1	10.8	Floor noise
Vert.	16590.0	44.6	-	39.5	8.2	38.6	-	53.7	-	68.2	-	14.6	-	Floor noise
Vert.	38710.0	71.1	65.1	43.8	4.9	73.6	3.5	46.2	43.7	73.9	53.9	27.7	10.2	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-80 5530 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

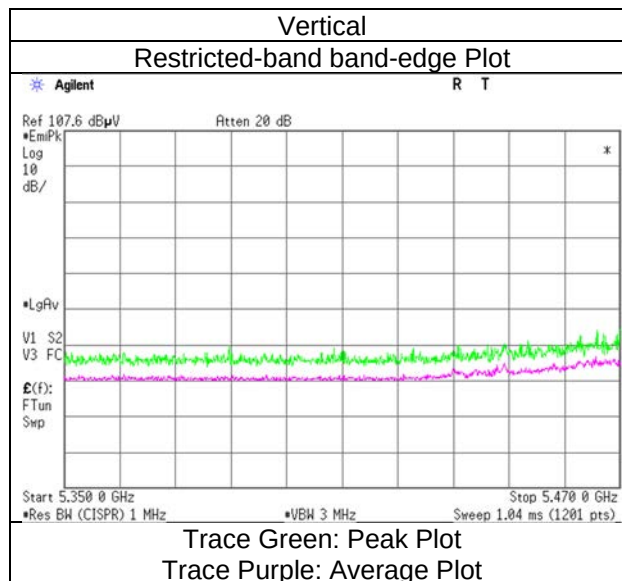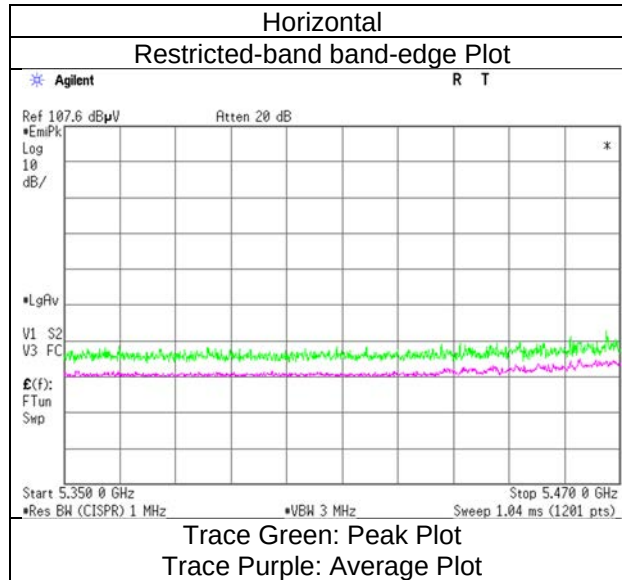

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 5610 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	44.0	-	31.9	3.8	32.3	-	47.4	-	68.2	-	20.8	-	
Hori.	11220.0	43.8	35.9	37.2	6.9	36.7	-	51.2	43.2	73.9	53.9	22.7	10.7	Floor noise
Hori.	16830.0	44.8	-	39.3	8.2	38.6	-	53.7	-	68.2	-	14.5	-	Floor noise
Hori.	39270.0	69.0	62.0	43.8	5.0	73.8	3.5	44.0	40.5	73.9	53.9	29.9	13.4	*2)
Vert.	5725.0	43.9	-	31.9	3.8	32.3	-	47.4	-	68.2	-	20.9	-	
Vert.	11220.0	43.8	35.9	37.2	6.9	36.7	-	51.2	43.2	73.9	53.9	22.7	10.7	Floor noise
Vert.	16830.0	44.8	-	39.3	8.2	38.6	-	53.7	-	68.2	-	14.5	-	Floor noise
Vert.	39270.0	70.7	64.8	43.8	5.0	73.8	3.5	45.7	43.3	73.9	53.9	28.2	10.6	*2)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-80 5610 MHz				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

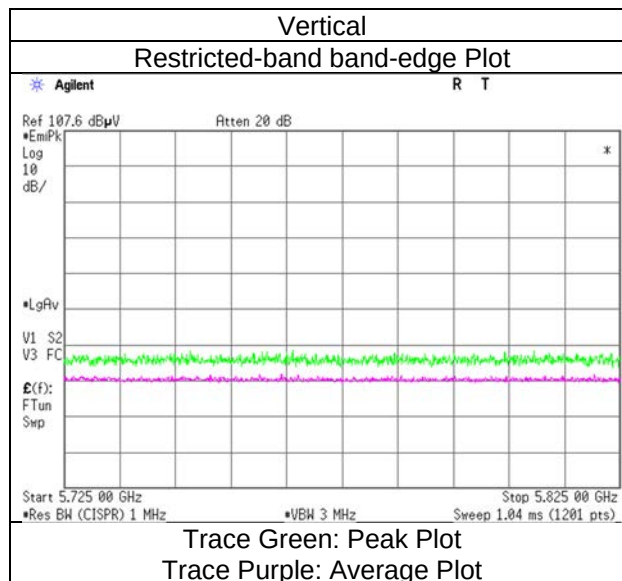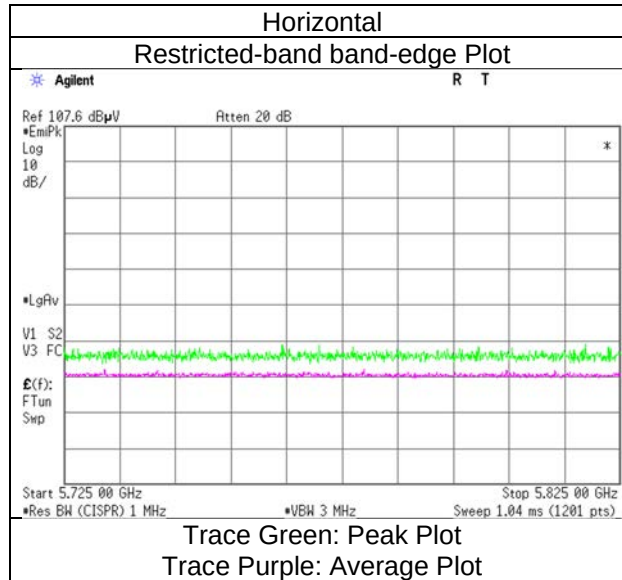

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 5775 MHz
------	---------------------

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz
April 12, 2026	SAC4	20 deg. C	55 % RH	Shousei Hamaguchi	10 GHz to 18 GHz
April 16, 2026	SAC4	21 deg. C	63 % RH	Shousei Hamaguchi	18 GHz to 26.5 GHz
April 20, 2026	SAC4	21 deg. C	59 % RH	Yuichiro Yamazaki	Above 26.5 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	43.8	-	31.8	3.8	32.3	-	47.0	-	68.2	-	21.2	-	
Hori.	5700.0	45.0	-	31.9	3.8	32.3	-	48.3	-	105.2	-	56.9	-	
Hori.	5720.0	46.5	-	31.9	3.8	32.3	-	50.0	-	110.8	-	60.8	-	
Hori.	5725.0	46.6	-	31.9	3.8	32.3	-	50.0	-	122.2	-	72.2	-	
Hori.	5850.0	44.5	-	32.3	3.9	32.3	-	48.4	-	122.2	-	73.9	-	
Hori.	5855.0	43.8	-	32.3	3.9	32.3	-	47.6	-	110.8	-	63.2	-	
Hori.	5875.0	43.7	-	32.3	3.9	32.3	-	47.5	-	105.2	-	57.7	-	
Hori.	5925.0	43.6	-	32.4	3.9	32.3	-	47.6	-	68.2	-	20.6	-	
Hori.	11550.0	43.8	35.2	37.3	6.9	36.7	-	51.4	42.7	73.9	53.9	22.5	11.2	Floor noise
Hori.	17325.0	44.8	-	39.8	8.2	38.6	-	54.3	-	68.2	-	14.0	-	Floor noise
Vert.	5650.0	44.0	-	31.8	3.8	32.3	-	47.2	-	68.2	-	21.0	-	
Vert.	5700.0	46.1	-	31.9	3.8	32.3	-	49.5	-	105.2	-	55.7	-	
Vert.	5720.0	47.2	-	31.9	3.8	32.3	-	50.7	-	110.8	-	60.2	-	
Vert.	5725.0	46.9	-	31.9	3.8	32.3	-	50.3	-	122.2	-	71.9	-	
Vert.	5850.0	46.0	-	32.3	3.9	32.3	-	49.8	-	122.2	-	72.4	-	
Vert.	5855.0	44.2	-	32.3	3.9	32.3	-	48.1	-	110.8	-	62.8	-	
Vert.	5875.0	44.1	-	32.3	3.9	32.3	-	48.0	-	105.2	-	57.2	-	
Vert.	5925.0	43.7	-	32.4	3.9	32.3	-	47.6	-	68.2	-	20.6	-	
Vert.	11550.0	43.8	35.2	37.3	6.9	36.7	-	51.4	42.7	73.9	53.9	22.5	11.2	Floor noise
Vert.	17325.0	44.8	-	39.8	8.2	38.6	-	54.3	-	68.2	-	14.0	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 18 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 18 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Mode	Tx 11ax-80 5775 MHz				
------	---------------------	--	--	--	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
March 24, 2026	SAC2	18 deg. C	52 % RH	Shousei Hamaguchi	1 GHz to 10 GHz

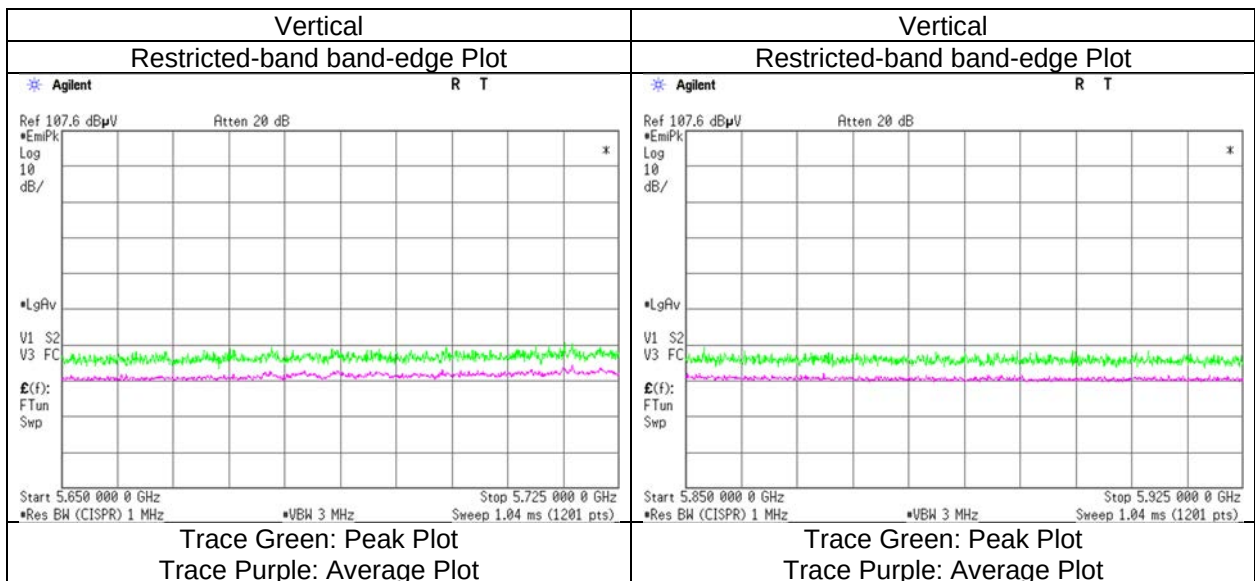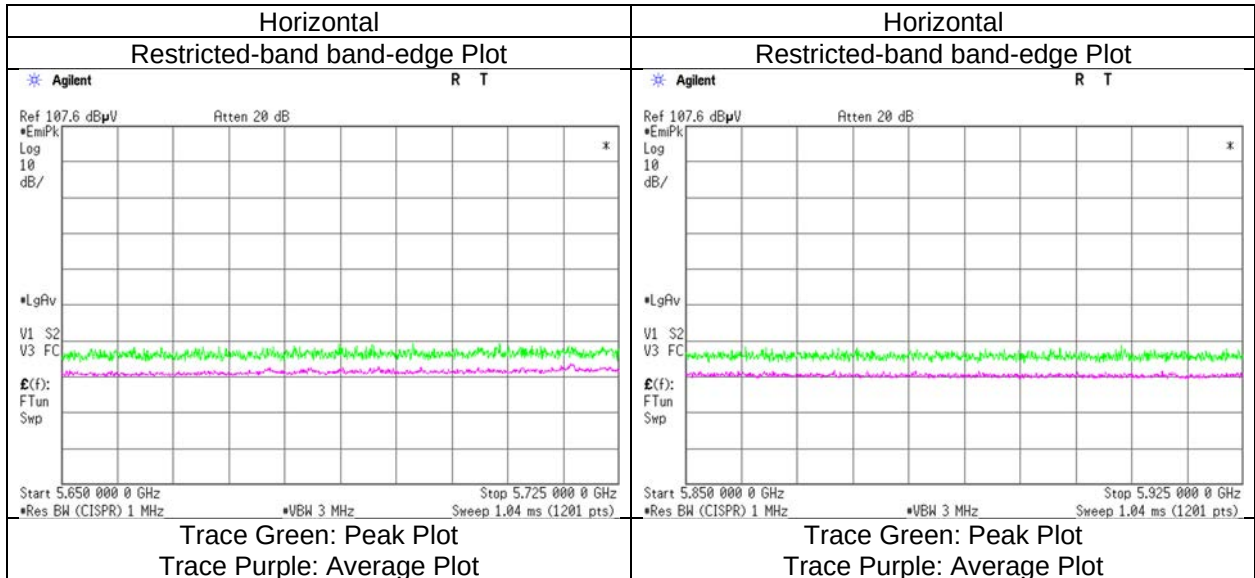

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5210 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 7, 2026	SAC4	22 deg. C	53 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	40.5	32.0	32.1	3.5	30.9	-	45.2	36.7	73.9	53.9	28.7	17.2	
Vert.	5150.0	41.3	32.1	32.1	3.5	30.9	-	46.0	36.8	73.9	53.9	27.9	17.1	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5210 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 7, 2026	SAC4	22 deg. C	53 % RH	Junki Nagatomi	1 GHz to 10 GHz

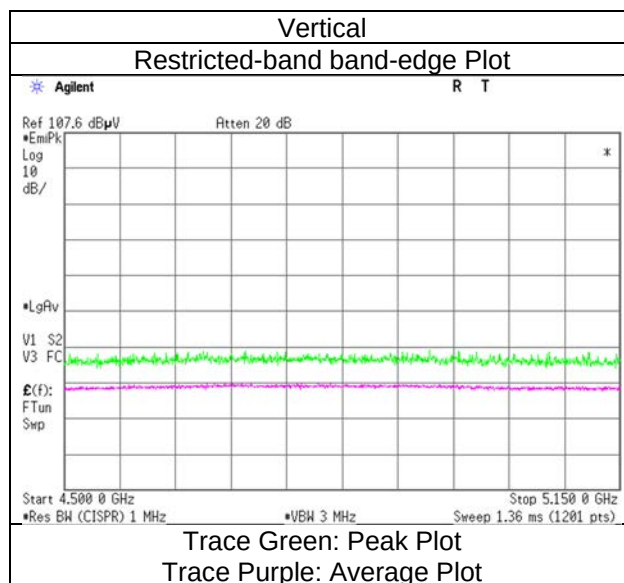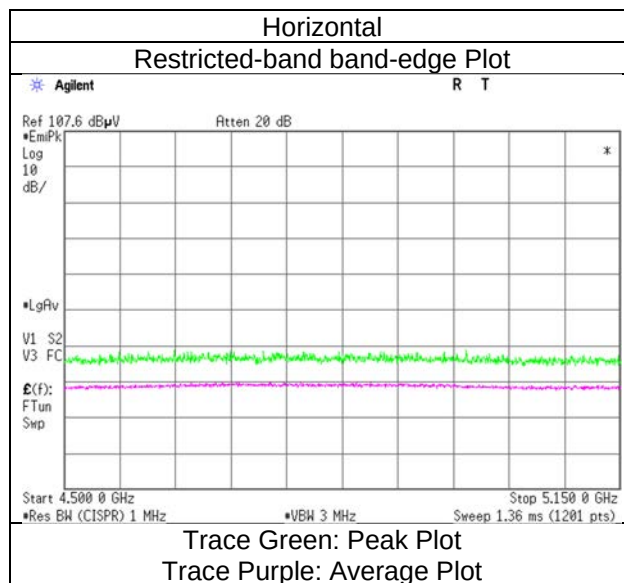

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5290 MHz 26 tone-RU index 36
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 7, 2026	SAC4	22 deg. C	53 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	41.3	32.4	31.7	3.6	31.0	-	45.6	36.8	73.9	53.9	28.3	17.1	
Vert.	5350.0	40.9	32.2	31.7	3.6	31.0	-	45.2	36.5	73.9	53.9	28.7	17.4	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5290 MHz 26 tone-RU index 36				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 7, 2026	SAC4	22 deg. C	53 % RH	Junki Nagatomi	1 GHz to 10 GHz

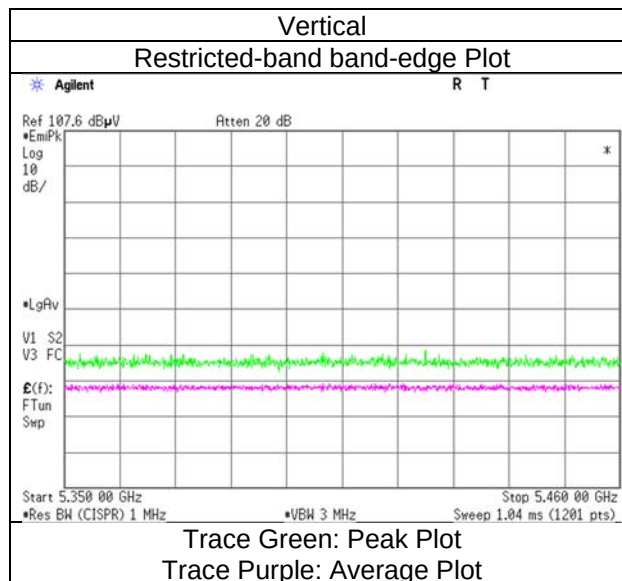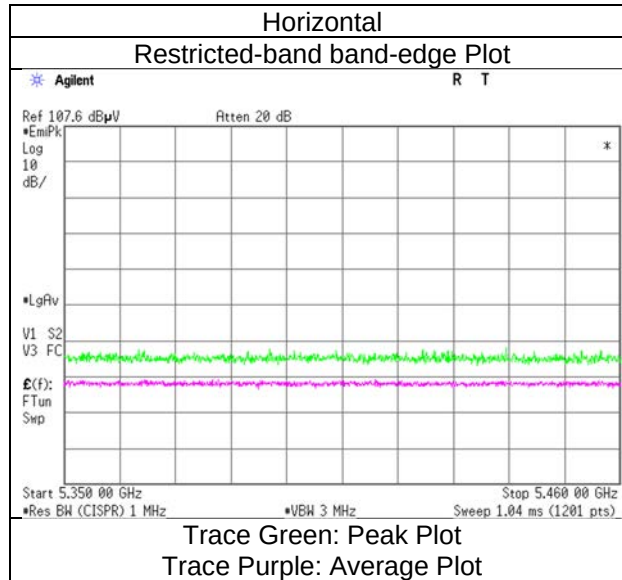

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5530 MHz 26 tone-RU index 0
------	--

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 8, 2026	SAC4	21 deg. C	48 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	39.9	29.8	32.0	3.6	31.0	-	44.5	34.4	68.2	53.9	23.7	19.5	
Hori.	5470.0	40.4	-	32.0	3.6	31.0	-	45.1	-	68.2	-	23.1	-	
Vert.	5460.0	41.0	31.8	32.0	3.6	31.0	-	45.6	36.4	68.2	53.9	22.6	17.5	
Vert.	5470.0	40.8	-	32.0	3.6	31.0	-	45.4	-	68.2	-	22.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)



Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5530 MHz 26 tone-RU index 0				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 8, 2026	SAC4	21 deg. C	48 % RH	Junki Nagatomi	1 GHz to 10 GHz

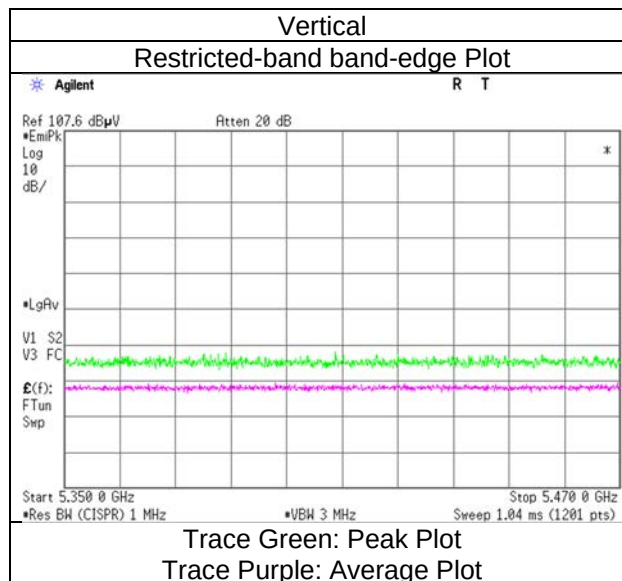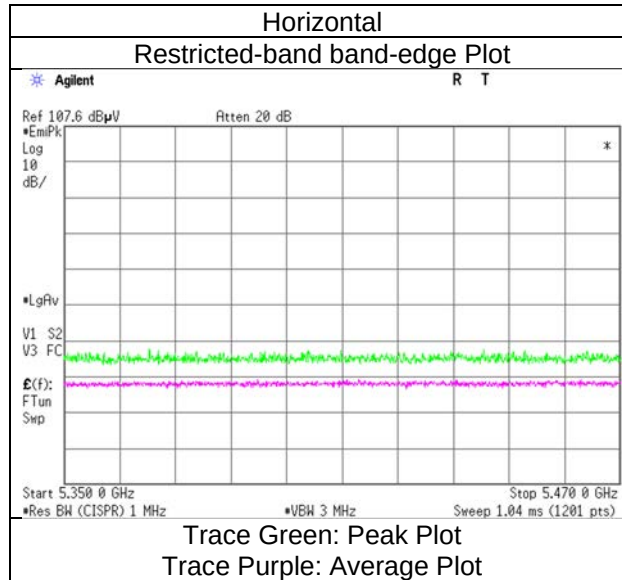

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Mode	Tx 11ax-80 (OFDMA) 5610 MHz 26 tone-RU index 36
------	---

Date	Test site	Temperature	Humidity	Engineer	Measurement Range
April 8, 2026	SAC4	21 deg. C	48 % RH	Junki Nagatomi	1 GHz to 10 GHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	39.9	-	32.5	3.7	31.1	-	45.1	-	68.2	-	23.1	-	
Vert.	5725.0	40.5	-	32.5	3.7	31.1	-	45.7	-	68.2	-	22.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.