




Set vibration grade:



open the outer shell,transmitters have 0 ~ 9 grades switch which used for dial the code for your choose

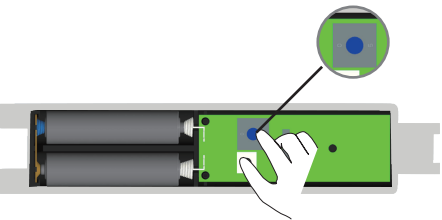

there are ten level of intensity of vibration, increase from level 0 to level 9 , and customers can set different class as per their demands. Only when the vibration strength reaches the certain set value, can the emitter be triggered and then emit signal to withdraw the roller blinds. The emitter will emit signal three times after it detects the vibration, thus can make sure to withdraw the roller blinds.level 1 is the most sensitive one,level 9 is the least.level 0 sense nothing.



place the cover after operation,it will enter the normal working statue.



Working principle:




DC510

When there is a vibration,reaching setting point,DC510 launch three times code.(30s quit the sense statue after one order is transmitted)



If vabration continues,the sensor will stand by after motor closed;if vabrate happens randomly,the motor will standby directly.



pack up awning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

MODIFICATION: Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.



All controls support 433MHz
All controls support 3V
All the parameters to the nameplate shall prevail

Electronic D
control awning open and close through vibration sensor

DC510 shake sensor
Specification



Version No : A/01



Technical Support



when coltage is below 2.2V,it will beep every 5s to remind the battery changing.




DC510

power supply voltage: DC 3 V (two batteries of number seven)
Working temperature: -20℃~55℃
Emission power: 10 milliwatt

Button specification



multi-function button:
0 level--set button,
5 level--up button,
9 level--down button.

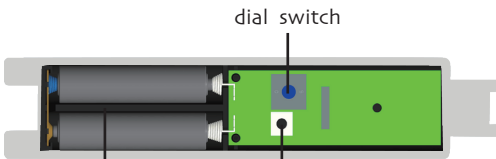

batteries muti-function button



Method of use

Match with E and R motors:



after the vabration reaches the set level,the awning will open,then press muti-function button with a beep hint,but do not release,then a beep again as a hint of direction changed.




a emitter should be already programmed.If emitter **a** is delete,then the wind-sun sensor is invalid




Switch on



The dial switch is adjusted to 0



continue to press "a" emitter's setting button two time



press the muti-function button one times of DC510



ok

Emitter adding is ok

Match with DC136:



The interval of different button must within 10 seconds for all setting, otherwise the system will restore the original state.



One receiver store 20 emitters channels at most, and one channel of emitter can control 20 receivers at most.



switch on



The dial switch is adjusted to 5



Press the receiver programming key



See green indicator flashing



Press the STOP button of receiver



See the receiver green indicator long flashing



press the muti-function button one times of DC510



See green indicator flashing and extinguished

ok

Setting is OK