

1. Duty Cycle


1.1 Test Result

1.1.1 30_Single_Ant1


Band n41 Single NTN Ant1							
BW (MHz)	DL Frequency (MHz)	Test Mode	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
CC1:20	CC1:2506.02	QPSK	3.712	4.997	74.28	1.29	0.13
		256QAM	3.712	4.997	74.28	1.29	0.11
	CC1:2592.99	QPSK	3.717	5.002	74.31	1.29	0.19
		256QAM	3.712	4.997	74.28	1.29	0.13
	CC1:2679.99	QPSK	3.712	4.997	74.28	1.29	0.11
		256QAM	3.712	4.997	74.28	1.29	0.13
CC1:40	CC1:2516.01	QPSK	3.718	5.003	74.32	1.29	0.11
		256QAM	3.718	5.003	74.32	1.29	0.11
	CC1:2592.99	QPSK	3.717	5.003	74.30	1.29	0.19
		256QAM	3.722	5.002	74.41	1.28	0.11
	CC1:2670	QPSK	3.712	4.997	74.28	1.29	0.11
		256QAM	3.712	4.997	74.28	1.29	0.11
CC1:50	CC1:2521.02	QPSK	3.722	5.002	74.41	1.28	0.08
		256QAM	3.722	5.002	74.41	1.28	0.08
	CC1:2592.99	QPSK	3.717	4.997	74.38	1.29	0.11
		256QAM	3.717	4.997	74.38	1.29	0.11
	CC1:2664.99	QPSK	3.723	5.003	74.42	1.28	0.08
		256QAM	3.712	4.997	74.28	1.29	0.19
CC1:60	CC1:2526	QPSK	3.723	5.003	74.42	1.28	0.08
		256QAM	3.722	4.997	74.48	1.28	0.03
	CC1:2592.99	QPSK	3.723	4.997	74.50	1.28	0.03
		256QAM	3.722	5.002	74.41	1.28	0.08
	CC1:2659.98	QPSK	3.712	4.998	74.27	1.29	0.13
		256QAM	3.712	4.997	74.28	1.29	0.13
CC1:80	CC1:2536.02	QPSK	3.722	5.002	74.41	1.28	0.11
		256QAM	3.723	5.003	74.42	1.28	0.08
	CC1:2592.99	QPSK	3.723	5.003	74.42	1.28	0.08
		256QAM	3.717	4.997	74.38	1.29	0.11
	CC1:2649.99	QPSK	3.712	4.997	74.28	1.29	0.21
		256QAM	3.717	5.002	74.31	1.29	0.19
CC1:100	CC1:2546.01	QPSK	3.722	5.002	74.41	1.28	0.08
		256QAM	3.723	5.003	74.42	1.28	0.11
	CC1:2592.99	QPSK	3.722	5.002	74.41	1.28	0.08
		256QAM	3.722	5.002	74.41	1.28	0.08
	CC1:2640	QPSK	3.722	5.002	74.41	1.28	0.08
		256QAM	3.722	5.002	74.41	1.28	0.08

1.2 Test Graph


1.2.1 30_Single_Ant1

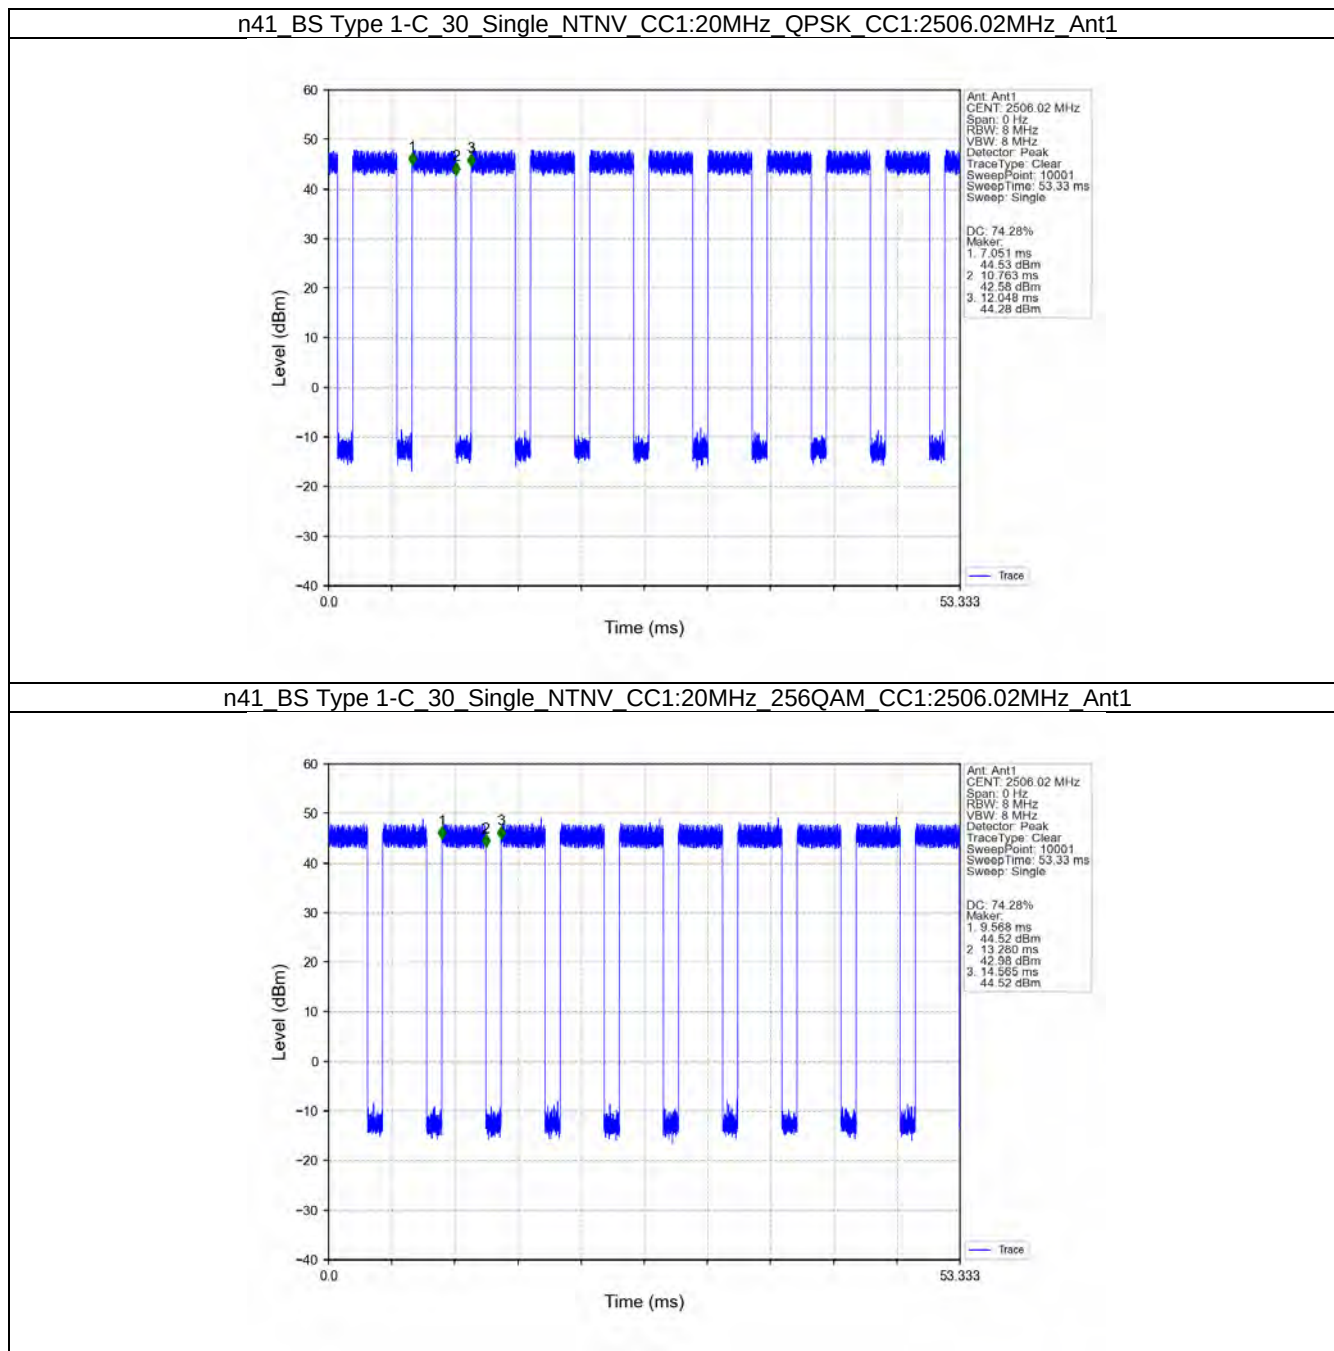


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

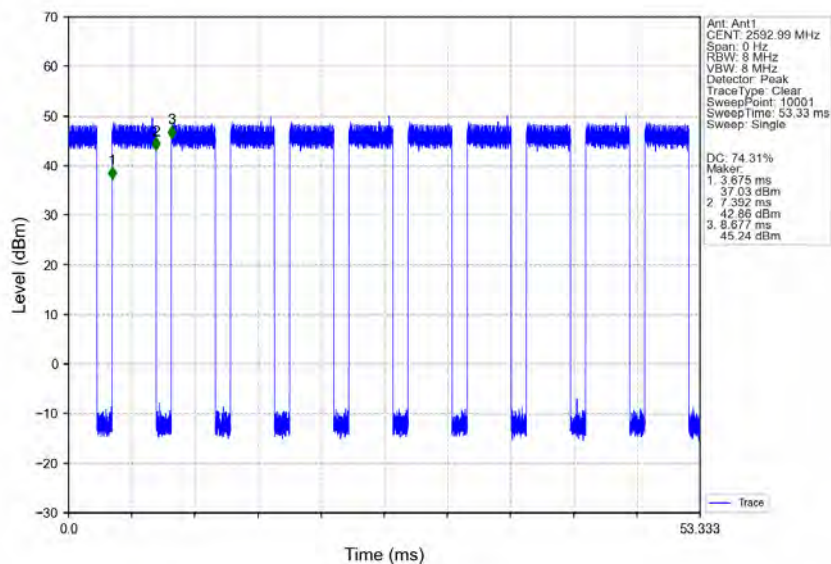


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

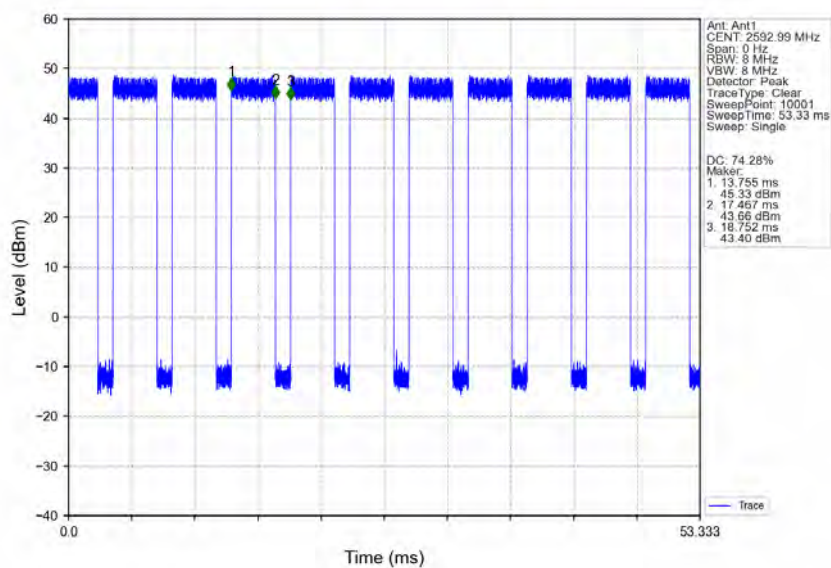


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

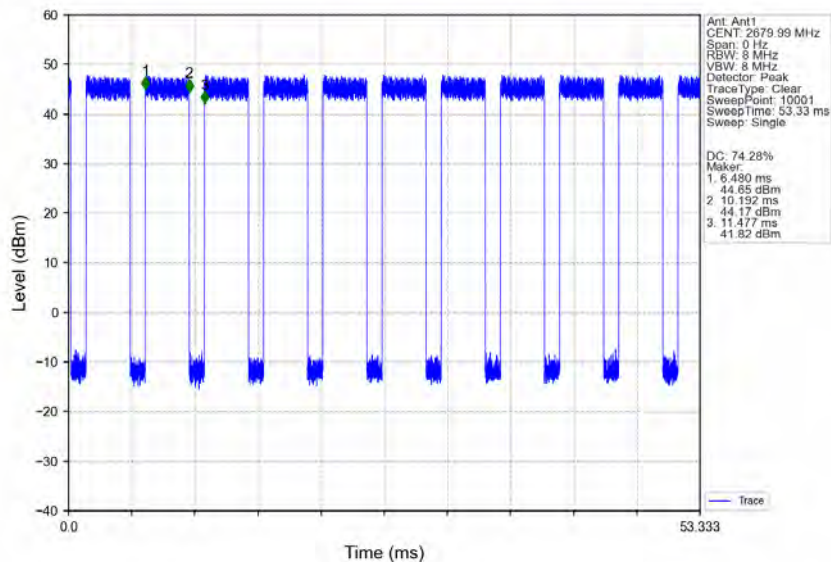


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

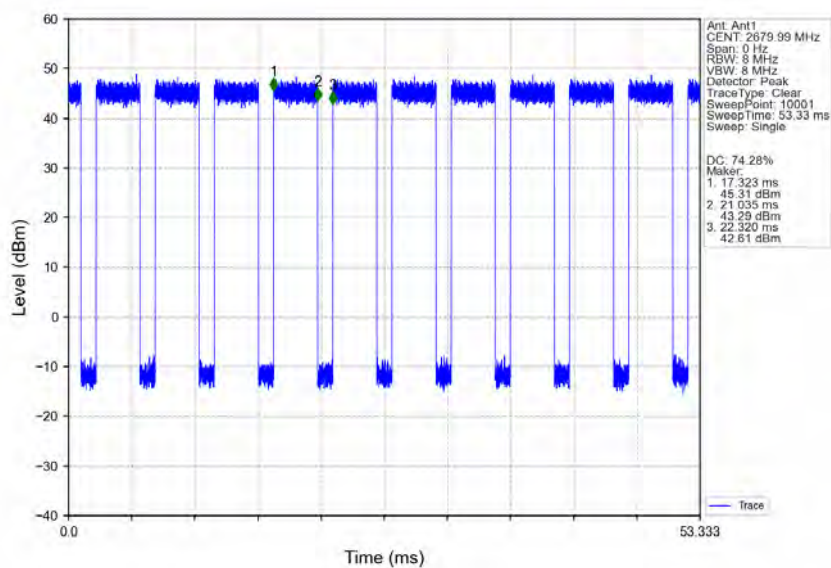


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

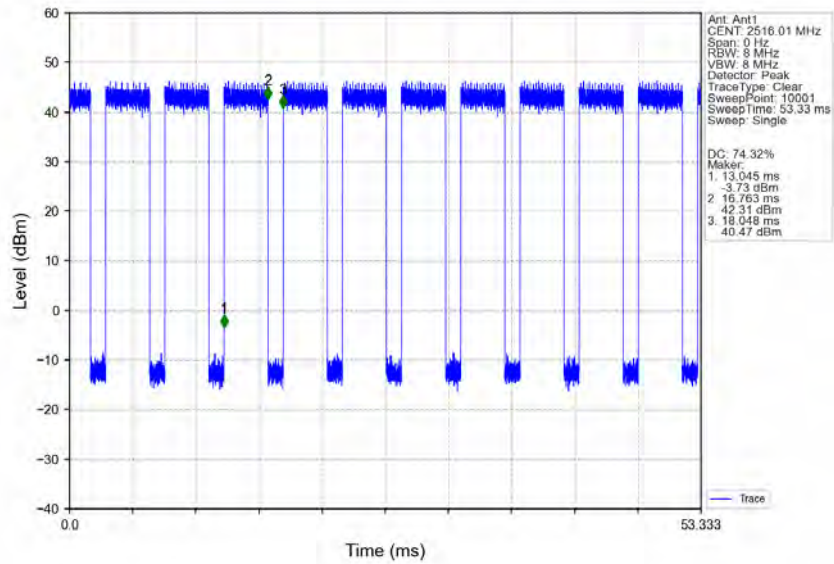


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

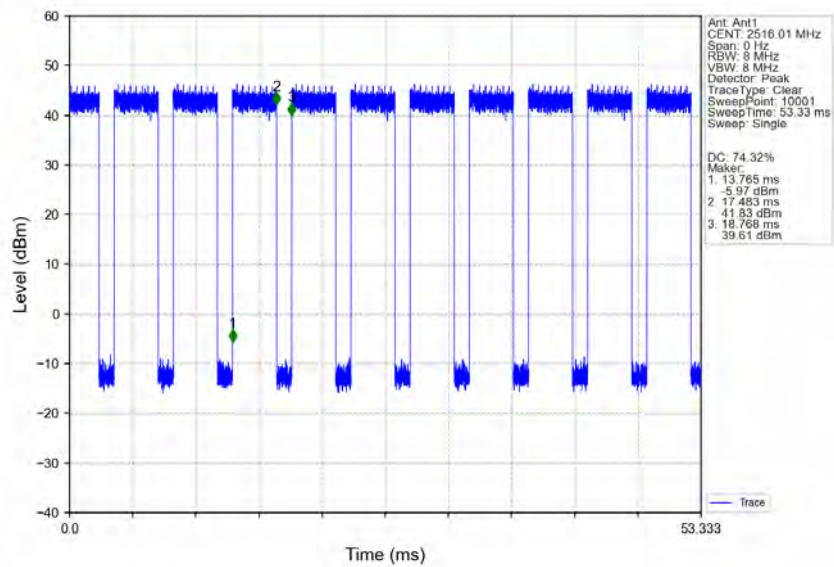


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2592.99MHz_Ant1

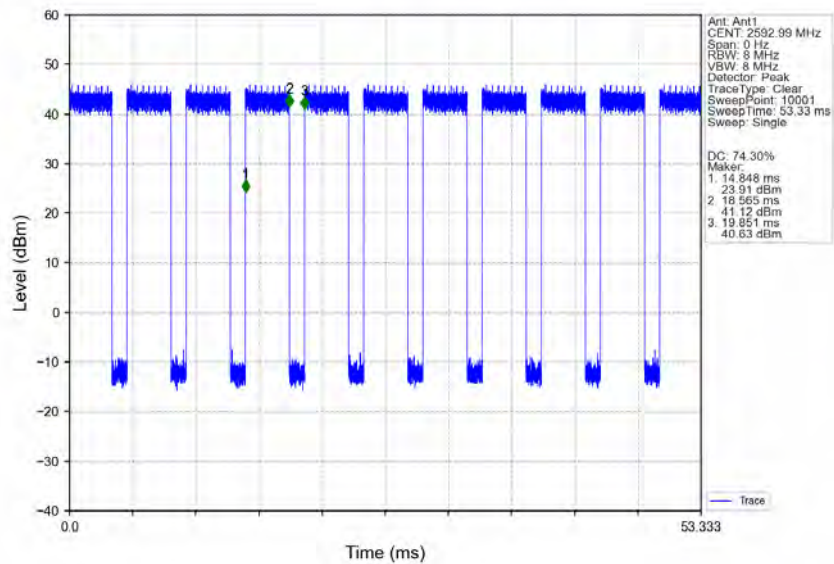


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2592.99MHz_Ant1

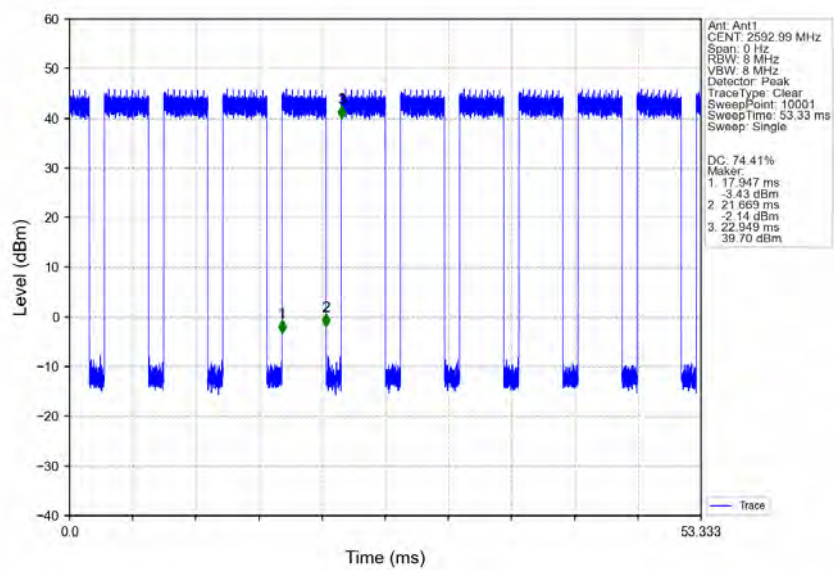


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2670MHz_Ant1

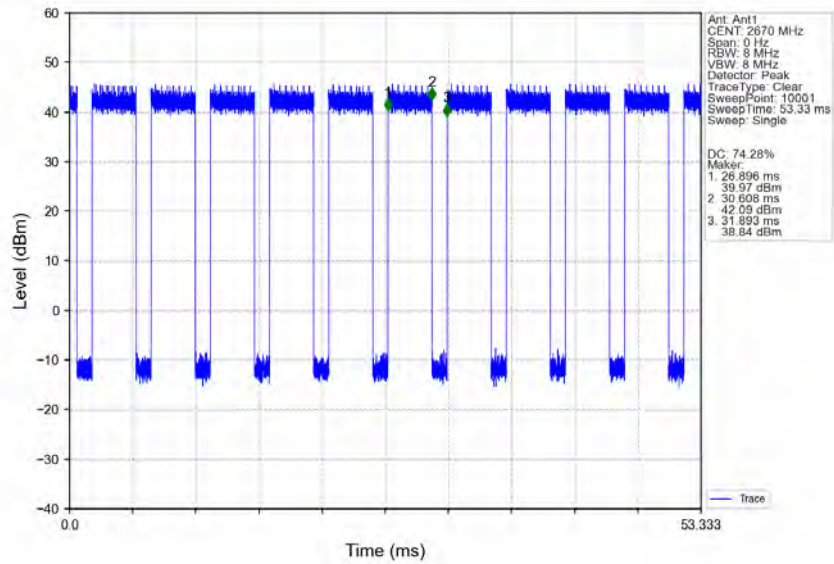


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2670MHz_Ant1

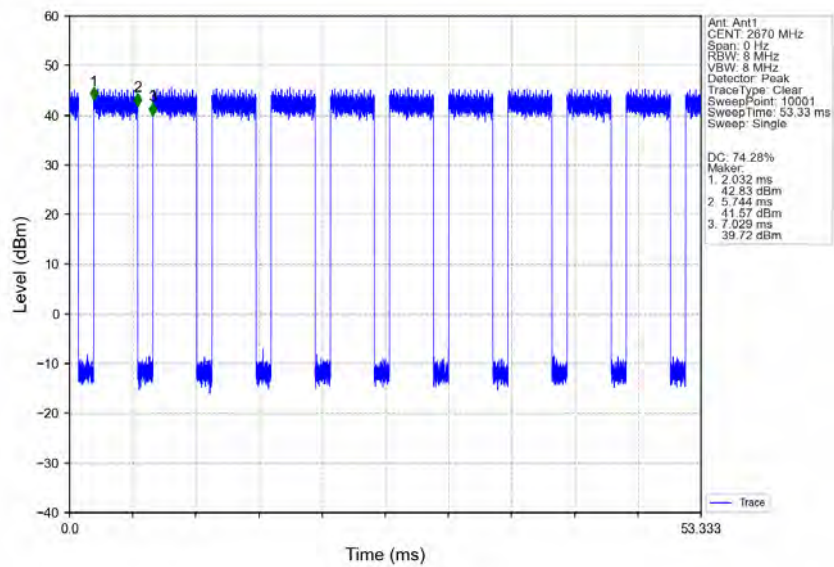


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2521.02MHz_Ant1

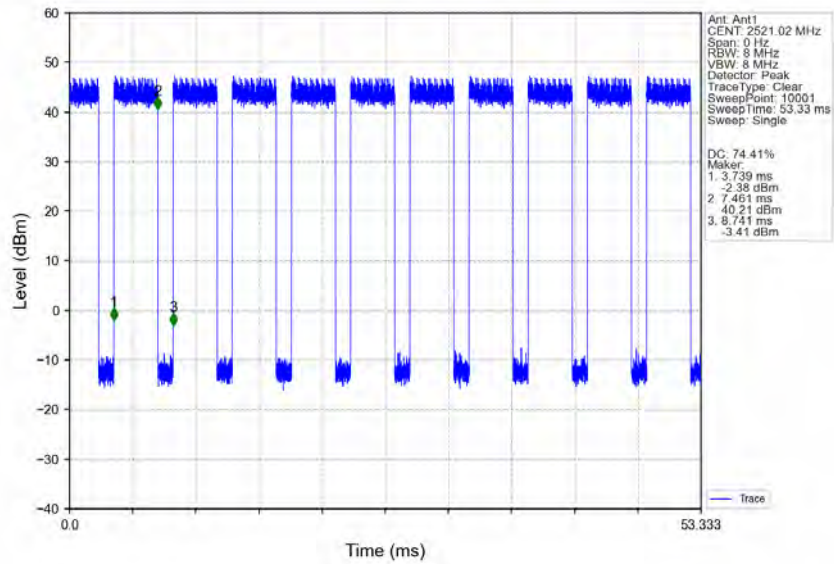


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2521.02MHz_Ant1

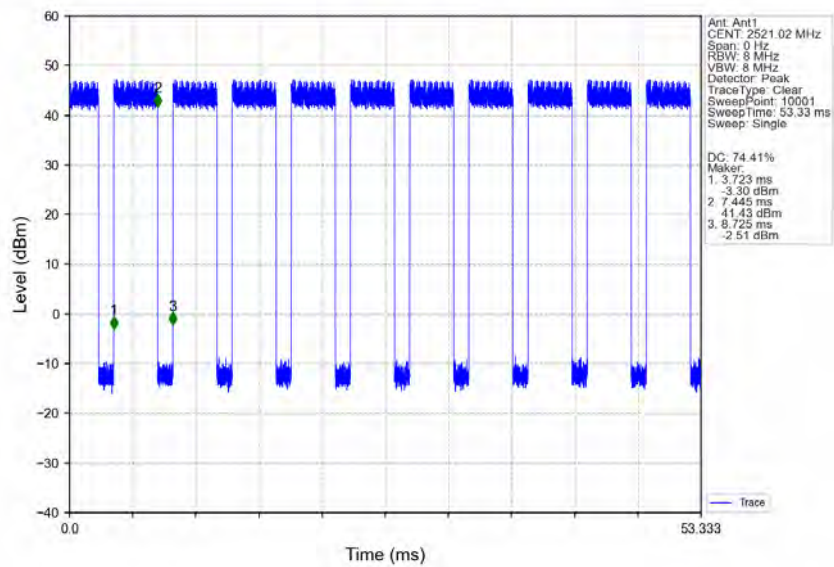


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2592.99MHz_Ant1

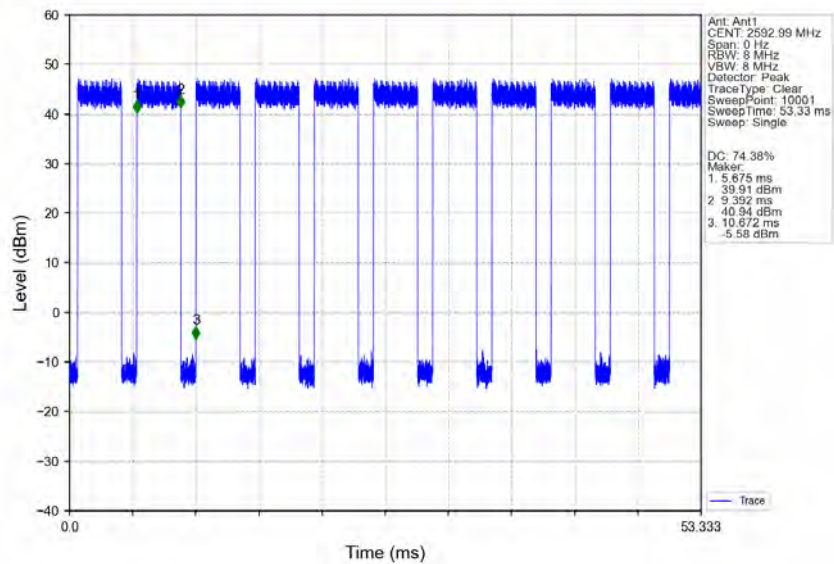


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2592.99MHz_Ant1

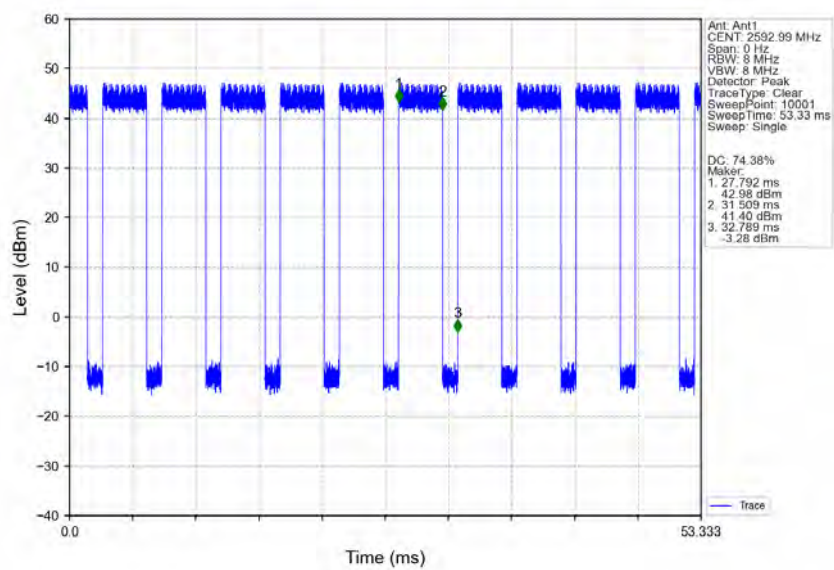


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2664.99MHz_Ant1

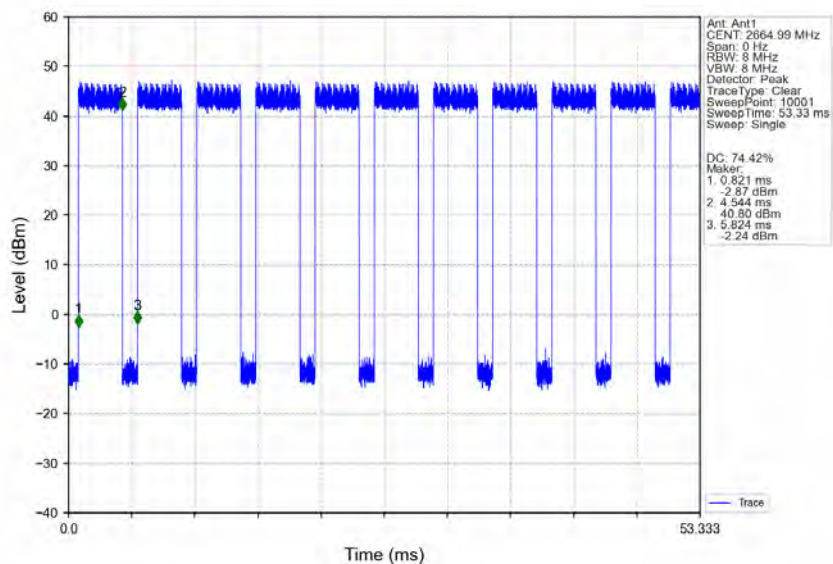


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2664.99MHz_Ant1

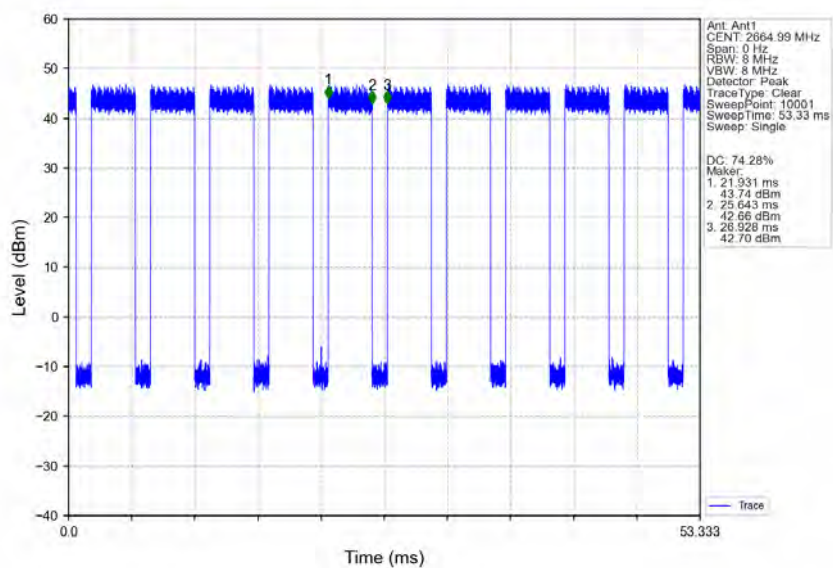


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2526MHz_Ant1

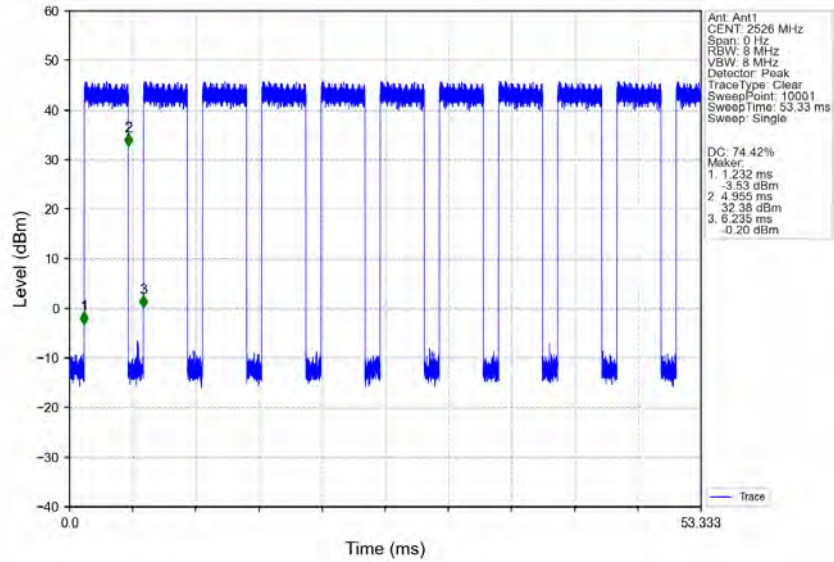


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2526MHz_Ant1

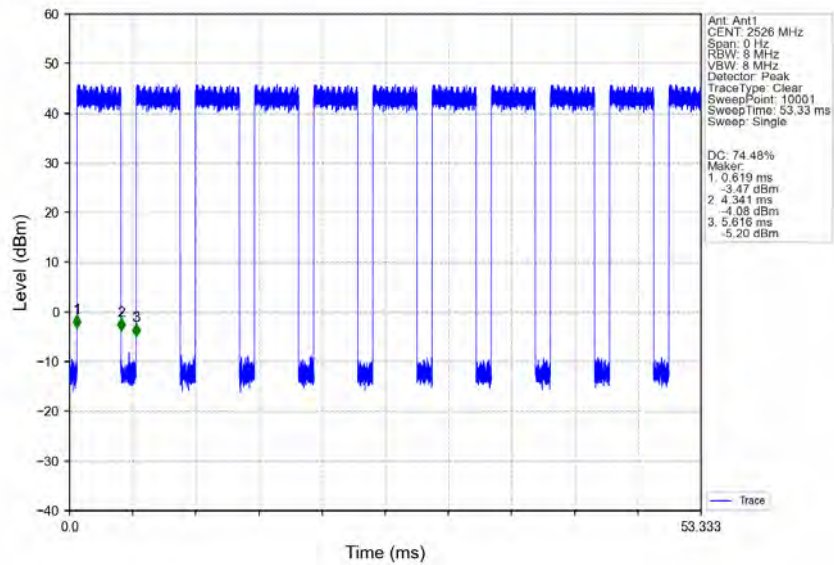


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2592.99MHz_Ant1

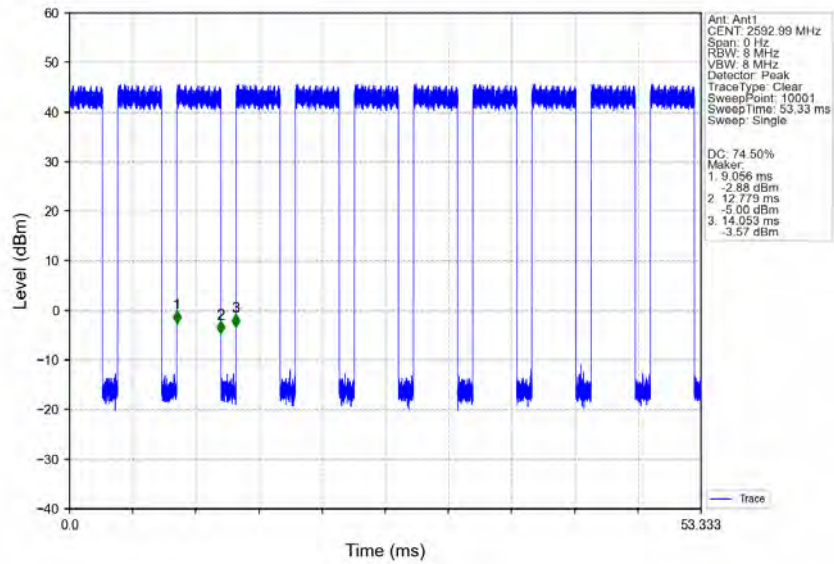


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2592.99MHz_Ant1

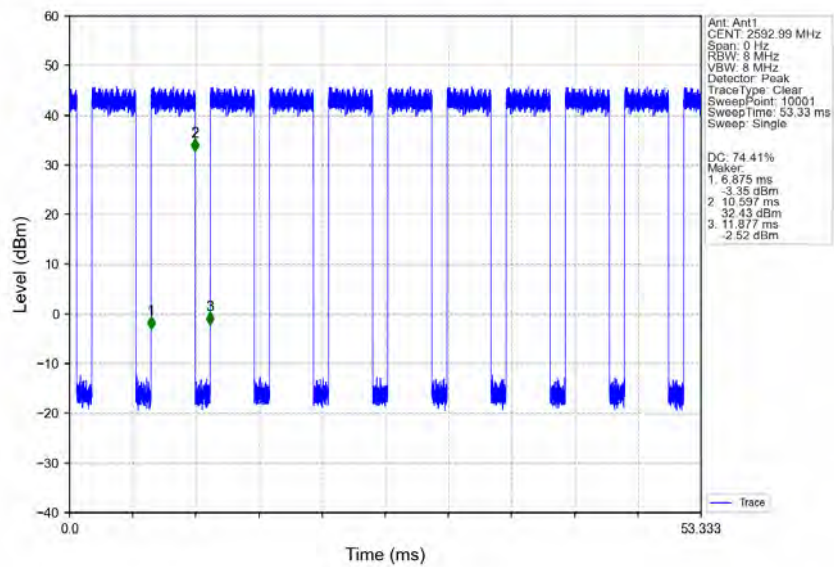


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2659.98MHz_Ant1

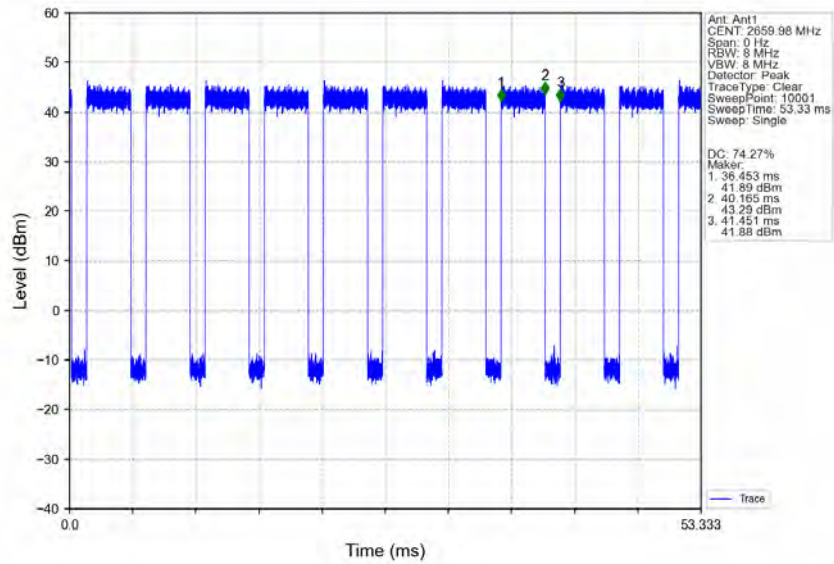


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2659.98MHz_Ant1

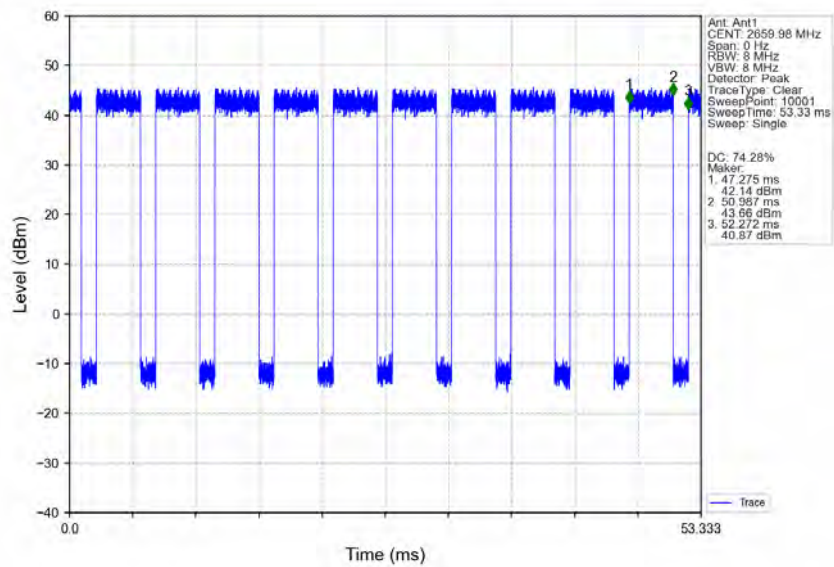


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2536.02MHz_Ant1

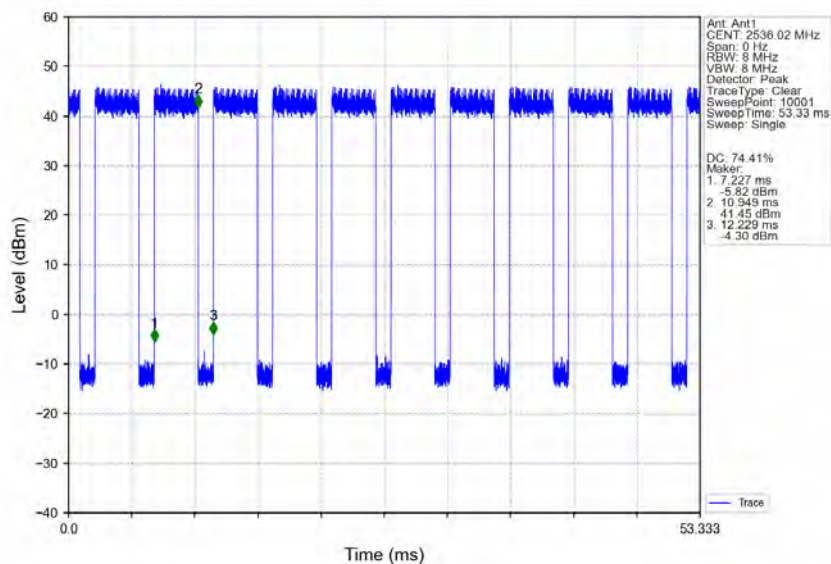


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2536.02MHz_Ant1

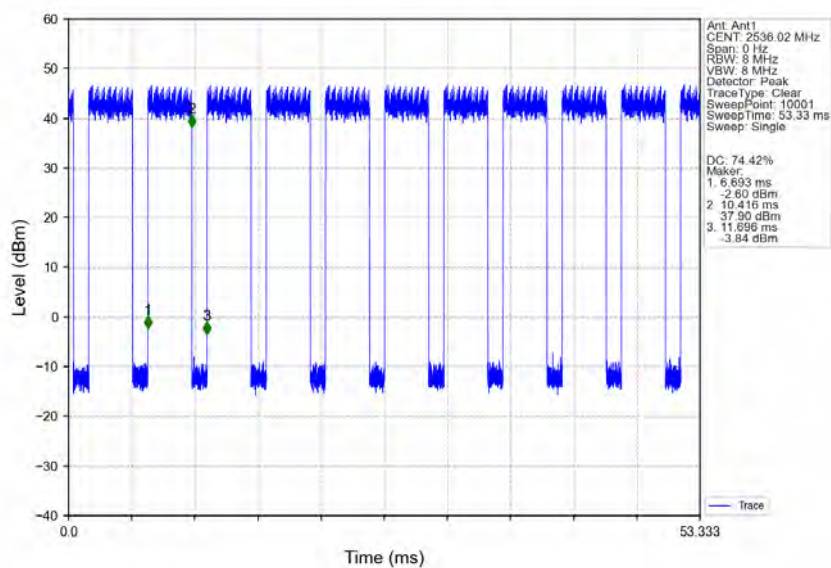


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2592.99MHz_Ant1

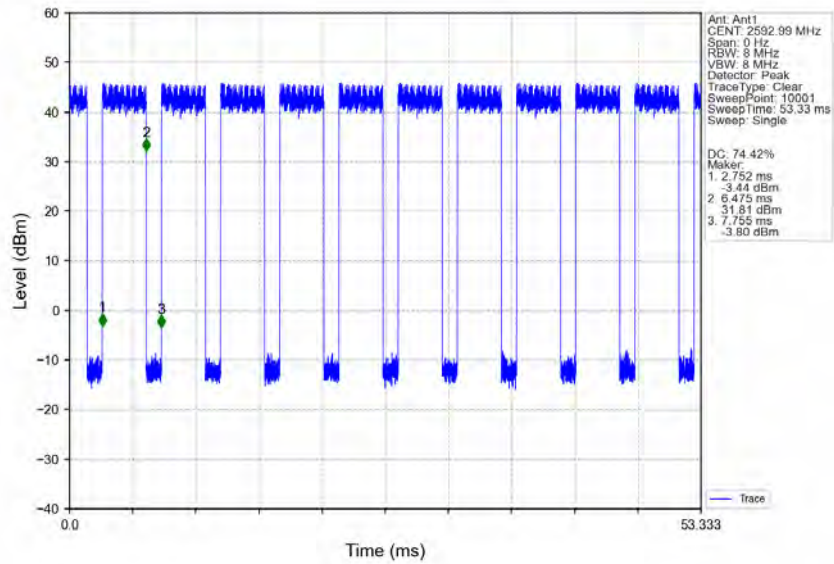


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2592.99MHz_Ant1

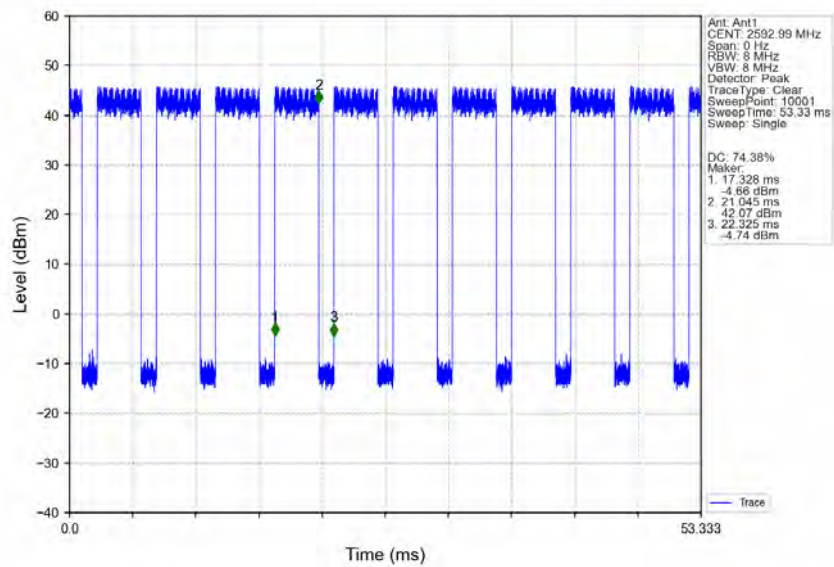


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2649.99MHz_Ant1

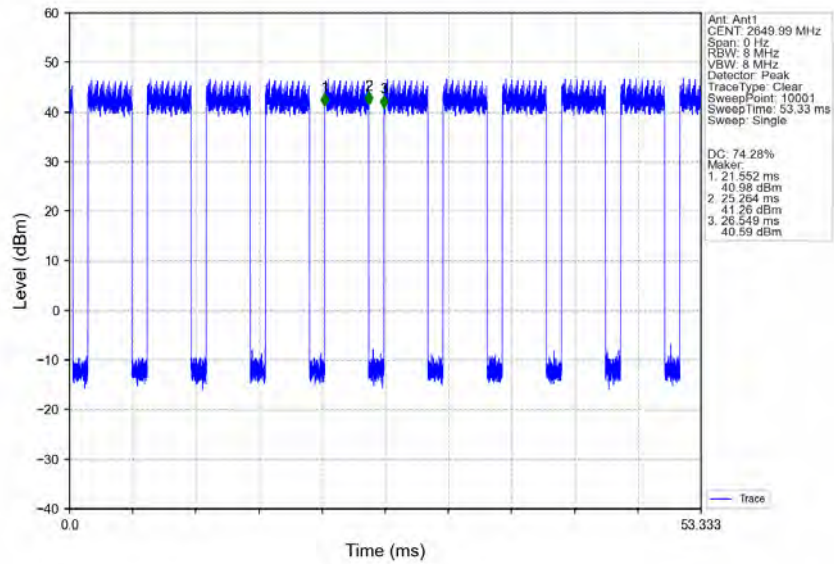


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2649.99MHz_Ant1

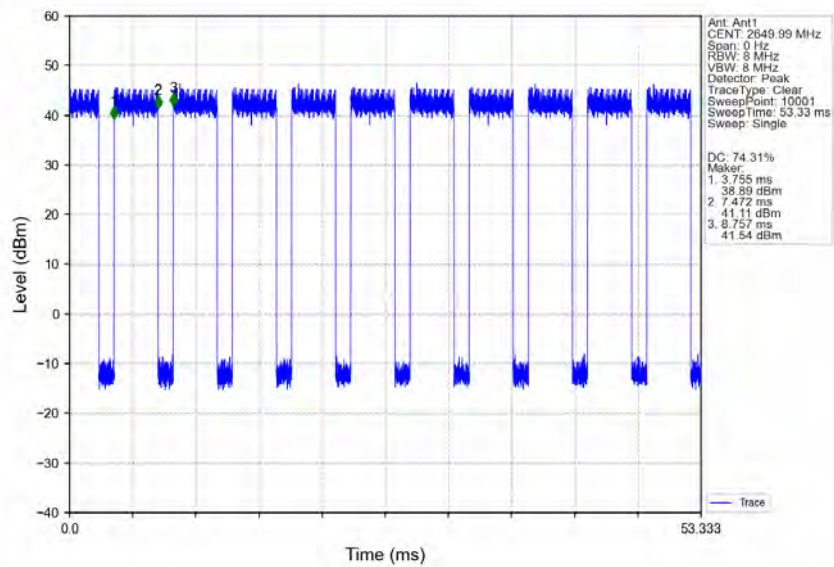


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2546.01MHz_Ant1

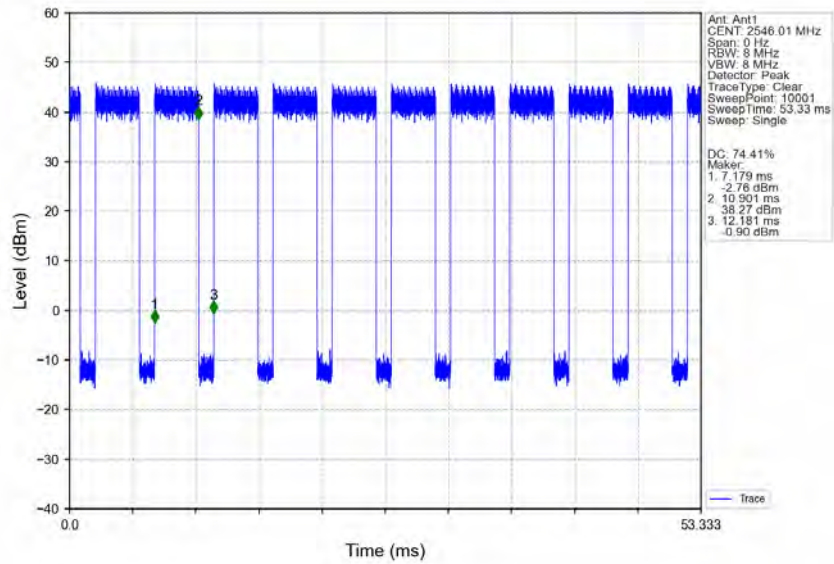


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2546.01MHz_Ant1

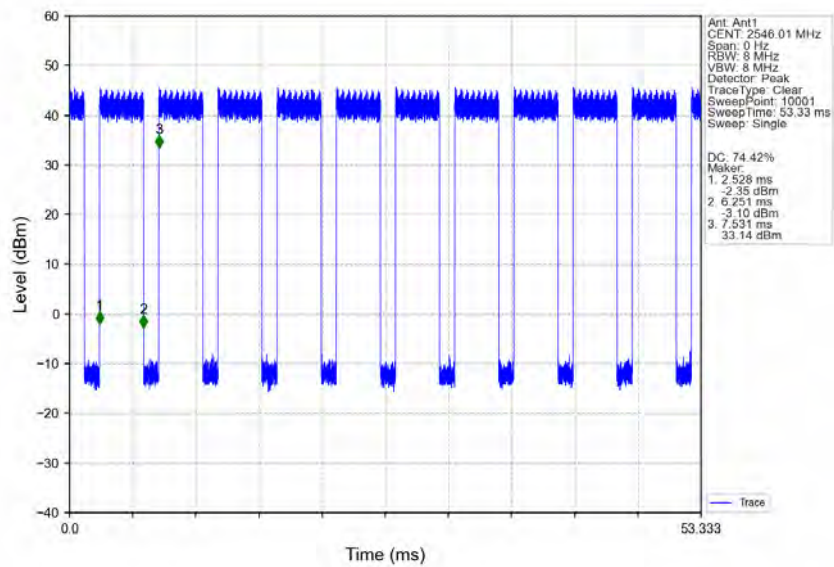


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2592.99MHz_Ant1

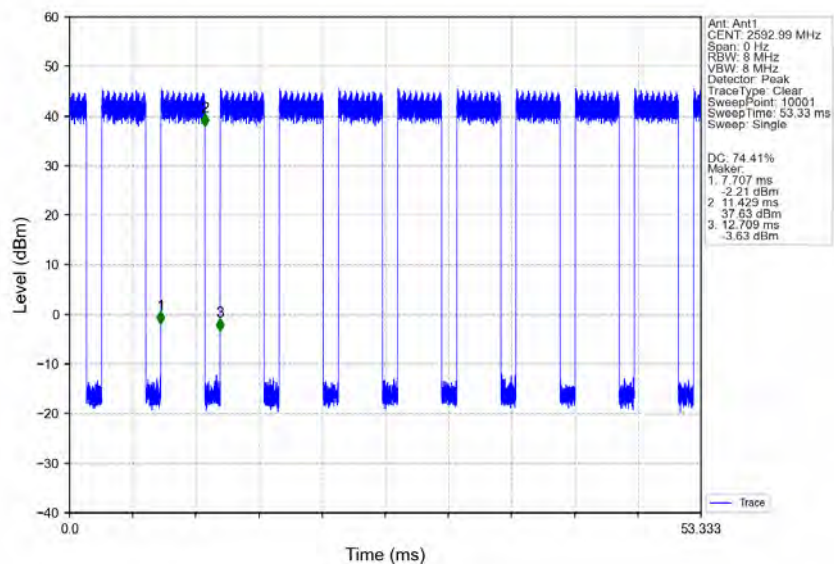


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2592.99MHz_Ant1

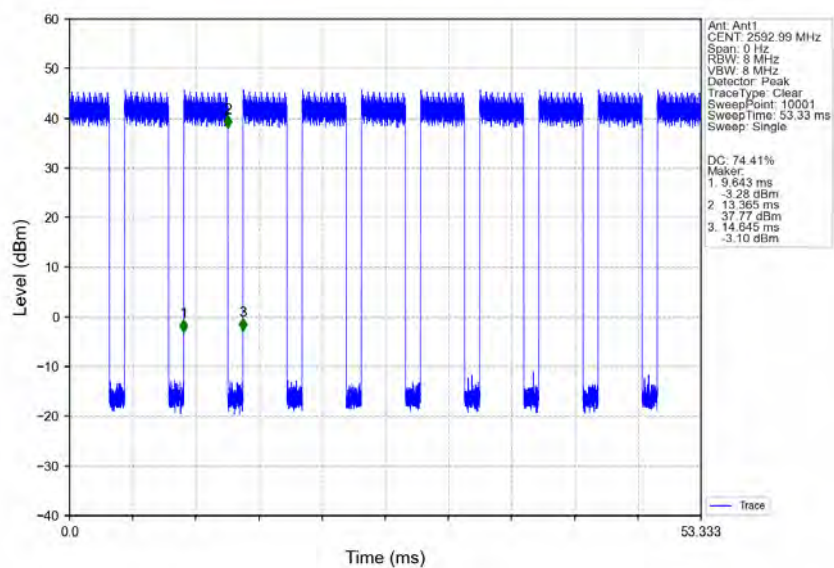

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_QPSK_CC1:2640MHz_Ant1

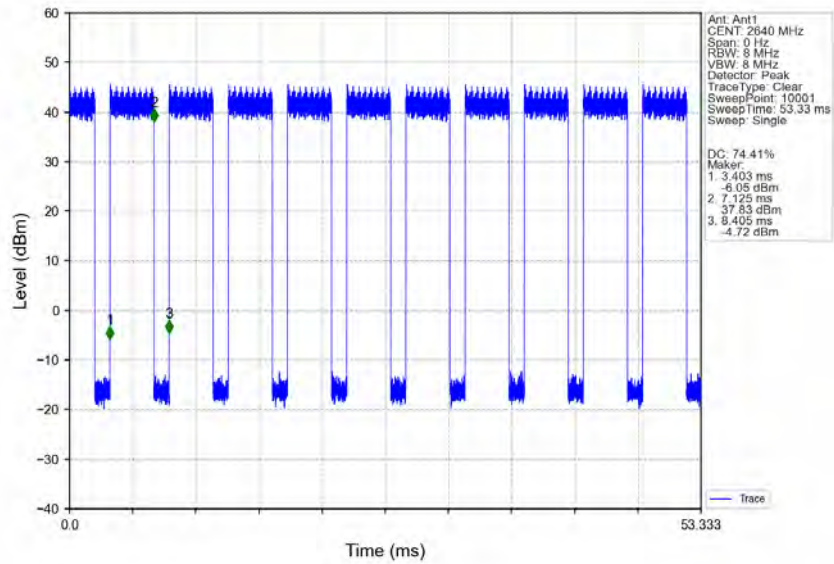

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_256QAM_CC1:2640MHz_Ant1

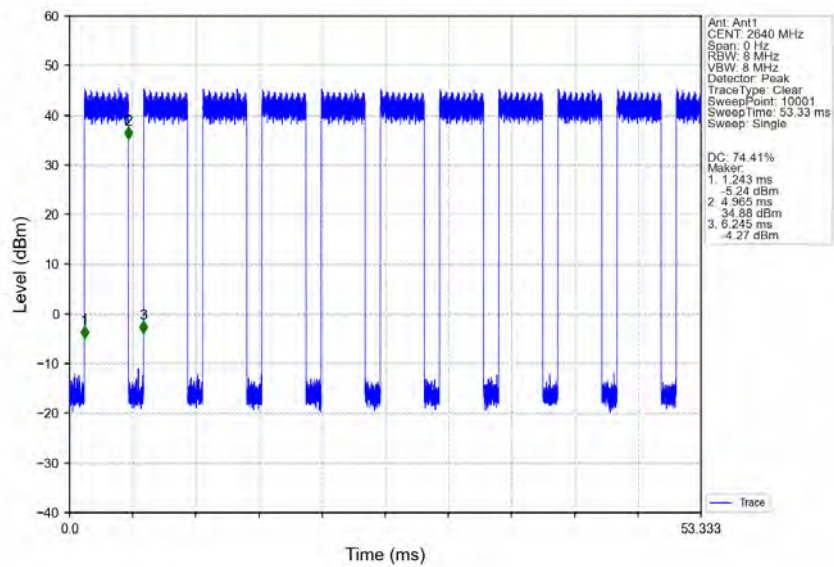

2. Effective (Isotropic) Radiated Power Output Data

2.1 Test Result

2.1.1 30_Single_Power

Band n41 Single NTN							
BW (MHz)	DL Frequency (MHz)	Test Mode	Ant No.	Conducted Power (dBm)	EIRP (dBm)		Verdict
					Total	Limit	
CC1:20	CC1:2506.02	QPSK	SISO	42.14	53.14	<=63	Pass
			2x2 MIMO	45.15	56.15	<=63	Pass
			4x4 MIMO	48.16	59.16	<=63	Pass
		256QAM	SISO	42.11	53.11	<=63	Pass
			2x2 MIMO	45.12	56.12	<=63	Pass
			4x4 MIMO	48.13	59.13	<=63	Pass
	CC1:2592.99	QPSK	SISO	42.75	53.75	<=63	Pass
			2x2 MIMO	45.76	56.76	<=63	Pass
			4x4 MIMO	48.77	59.77	<=63	Pass
		256QAM	SISO	42.76	53.76	<=63	Pass
			2x2 MIMO	45.77	56.77	<=63	Pass
			4x4 MIMO	48.78	59.78	<=63	Pass
	CC1:2679.99	QPSK	SISO	41.98	52.98	<=63	Pass
			2x2 MIMO	44.99	55.99	<=63	Pass
			4x4 MIMO	48.00	59.00	<=63	Pass
		256QAM	SISO	41.98	52.98	<=63	Pass
			2x2 MIMO	44.99	55.99	<=63	Pass
			4x4 MIMO	48.00	59.00	<=63	Pass
CC1:40	CC1:2516.01	QPSK	SISO	42.86	53.86	<=63	Pass
			2x2 MIMO	45.87	56.87	<=63	Pass
			4x4 MIMO	48.88	59.88	<=63	Pass
		256QAM	SISO	42.86	53.86	<=63	Pass
			2x2 MIMO	45.87	56.87	<=63	Pass
			4x4 MIMO	48.88	59.88	<=63	Pass
	CC1:2592.99	QPSK	SISO	42.70	53.70	<=63	Pass
			2x2 MIMO	45.71	56.71	<=63	Pass
			4x4 MIMO	48.72	59.72	<=63	Pass
		256QAM	SISO	42.71	53.71	<=63	Pass
			2x2 MIMO	45.72	56.72	<=63	Pass
			4x4 MIMO	48.73	59.73	<=63	Pass
	CC1:2670	QPSK	SISO	42.28	53.28	<=63	Pass
			2x2 MIMO	45.29	56.29	<=63	Pass
			4x4 MIMO	48.30	59.30	<=63	Pass
		256QAM	SISO	42.28	53.28	<=63	Pass
			2x2 MIMO	45.29	56.29	<=63	Pass
			4x4 MIMO	48.30	59.30	<=63	Pass
CC1:50	CC1:2521.02	QPSK	SISO	44.72	55.72	<=63	Pass
			2x2 MIMO	47.73	58.73	<=63	Pass
			4x4 MIMO	50.74	61.74	<=63	Pass
		256QAM	SISO	44.74	55.74	<=63	Pass
			2x2 MIMO	47.75	58.75	<=63	Pass
			4x4 MIMO	50.76	61.76	<=63	Pass
	CC1:2592.99	QPSK	SISO	44.82	55.82	<=63	Pass

		256QAM	2x2 MIMO	47.83	58.83	<=63	Pass
			4x4 MIMO	50.84	61.84	<=63	Pass
			SISO	44.81	55.81	<=63	Pass
			2x2 MIMO	47.82	58.82	<=63	Pass
			4x4 MIMO	50.83	61.83	<=63	Pass
	CC1:2664.99	QPSK	SISO	44.43	55.43	<=63	Pass
			2x2 MIMO	47.44	58.44	<=63	Pass
			4x4 MIMO	50.45	61.45	<=63	Pass
		256QAM	SISO	44.44	55.44	<=63	Pass
			2x2 MIMO	47.45	58.45	<=63	Pass
CC1:60	CC1:2526	QPSK	SISO	44.74	55.74	<=63	Pass
			2x2 MIMO	47.75	58.75	<=63	Pass
			4x4 MIMO	50.76	61.76	<=63	Pass
		256QAM	SISO	44.74	55.74	<=63	Pass
			2x2 MIMO	47.75	58.75	<=63	Pass
			4x4 MIMO	50.76	61.76	<=63	Pass
	CC1:2592.99	QPSK	SISO	44.75	55.75	<=63	Pass
			2x2 MIMO	47.76	58.76	<=63	Pass
			4x4 MIMO	50.77	61.77	<=63	Pass
		256QAM	SISO	44.75	55.75	<=63	Pass
			2x2 MIMO	47.76	58.76	<=63	Pass
			4x4 MIMO	50.77	61.77	<=63	Pass
	CC1:2659.98	QPSK	SISO	44.41	55.41	<=63	Pass
			2x2 MIMO	47.42	58.42	<=63	Pass
			4x4 MIMO	50.43	61.43	<=63	Pass
		256QAM	SISO	44.41	55.41	<=63	Pass
			2x2 MIMO	47.42	58.42	<=63	Pass
			4x4 MIMO	50.43	61.43	<=63	Pass
CC1:80	CC1:2536.02	QPSK	SISO	45.53	56.53	<=63	Pass
			2x2 MIMO	48.54	59.54	<=63	Pass
			4x4 MIMO	51.55	62.55	<=63	Pass
		256QAM	SISO	45.54	56.54	<=63	Pass
			2x2 MIMO	48.55	59.55	<=63	Pass
			4x4 MIMO	51.56	62.56	<=63	Pass
	CC1:2592.99	QPSK	SISO	45.59	56.59	<=63	Pass
			2x2 MIMO	48.60	59.60	<=63	Pass
			4x4 MIMO	51.61	62.61	<=63	Pass
		256QAM	SISO	45.57	56.57	<=63	Pass
			2x2 MIMO	48.58	59.58	<=63	Pass
			4x4 MIMO	51.59	62.59	<=63	Pass
	CC1:2649.99	QPSK	SISO	45.43	56.43	<=63	Pass
			2x2 MIMO	48.44	59.44	<=63	Pass
			4x4 MIMO	51.45	62.45	<=63	Pass
		256QAM	SISO	45.44	56.44	<=63	Pass
			2x2 MIMO	48.45	59.45	<=63	Pass
			4x4 MIMO	51.46	62.46	<=63	Pass
CC1:100	CC1:2546.01	QPSK	SISO	45.56	56.56	<=63	Pass
			2x2 MIMO	48.57	59.57	<=63	Pass
			4x4 MIMO	51.58	62.58	<=63	Pass
		256QAM	SISO	45.56	56.56	<=63	Pass
			2x2 MIMO	48.57	59.57	<=63	Pass
	CC1:2592.99	QPSK	4x4 MIMO	51.58	62.58	<=63	Pass
			SISO	45.60	56.60	<=63	Pass
			2x2 MIMO	48.61	59.61	<=63	Pass
			4x4 MIMO	51.62	62.62	<=63	Pass




		256QAM	1	45.60	56.60	<=63	Pass
			2x2	48.61	59.61	<=63	Pass
			4x4	51.62	62.62	<=63	Pass
	CC1:2640	QPSK	1	45.47	56.47	<=63	Pass
			2x2	48.48	59.48	<=63	Pass
			4x4	51.49	62.49	<=63	Pass
		256QAM	1	45.49	56.49	<=63	Pass
			2x2	48.50	59.50	<=63	Pass
			4x4	51.51	62.51	<=63	Pass

Note1: Antenna Gain=11dBi, EIRP=Conducted Power + Antenna Gain.


Note2: EUT supports MIMO and each antenna port is the same, according to C63.26 6.4, a coefficient is added to the single antenna port power to calculate the total power. 2x2 MIMO add $10\lg(2)=3.01\text{dB}$, 4x4 MIMO add $10\lg(4)=6.02\text{dB}$.

2.2 Test Graph


2.2.1 30_Single_Power

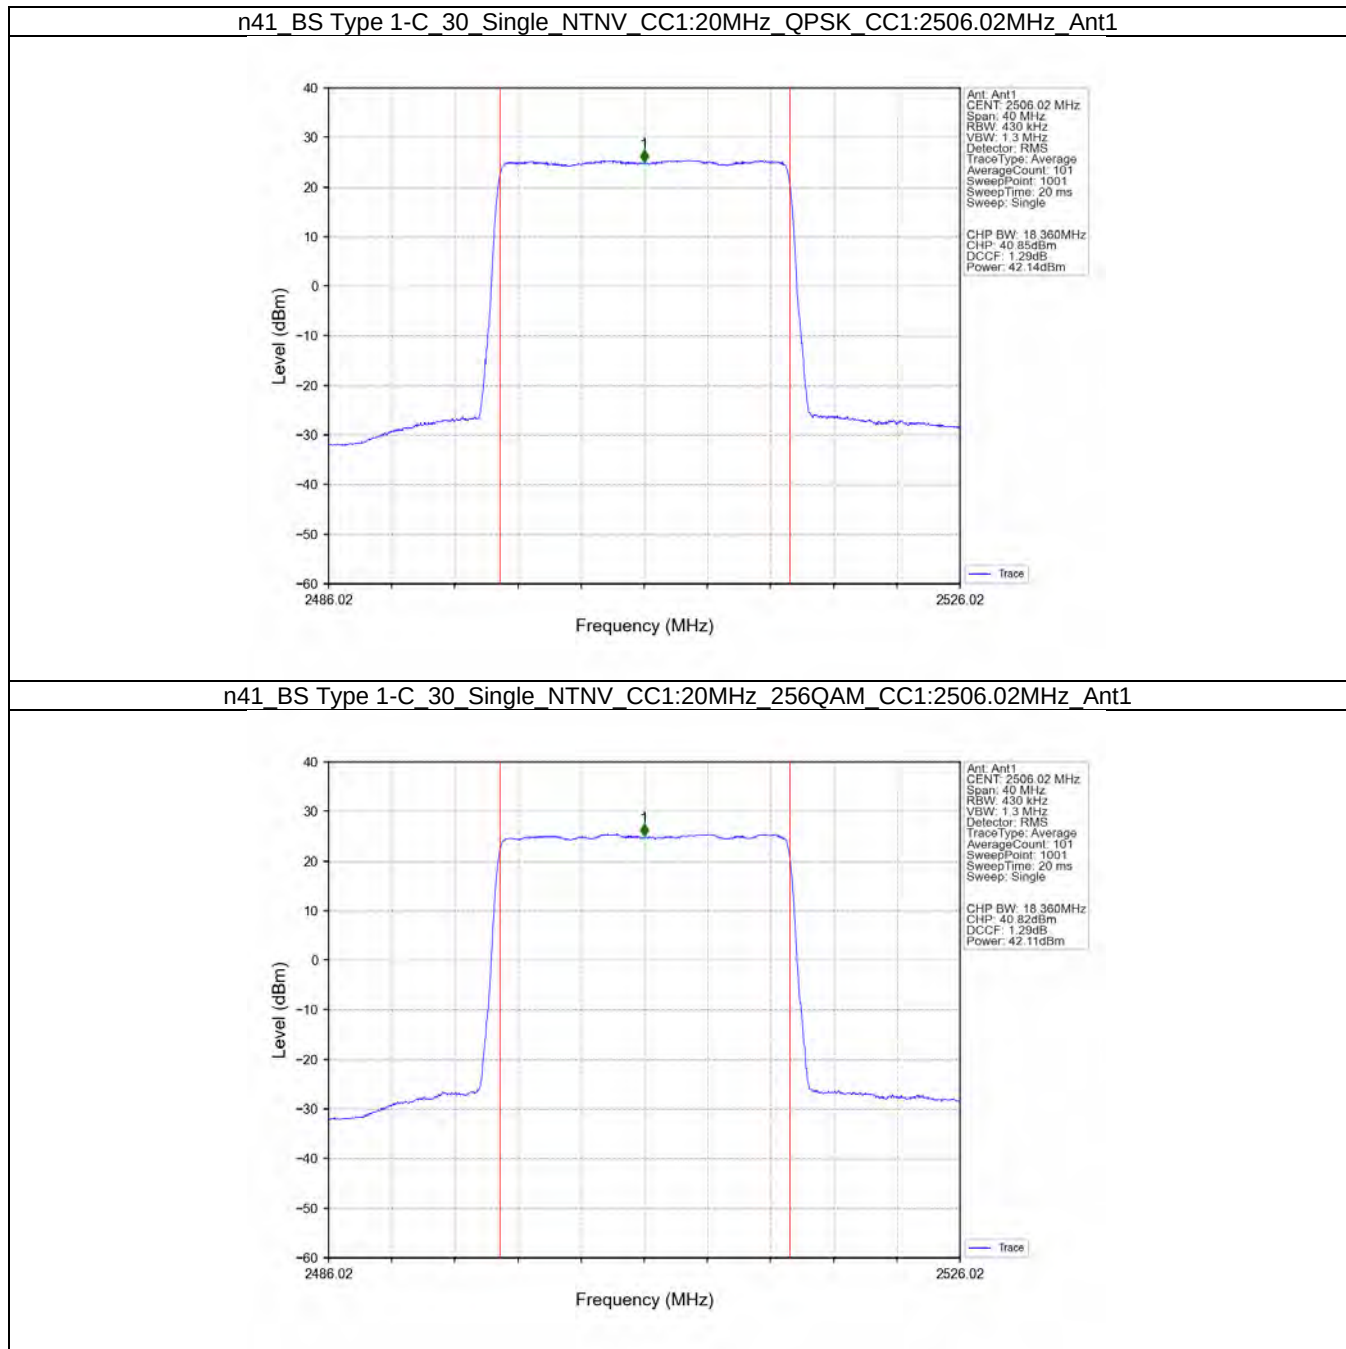


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

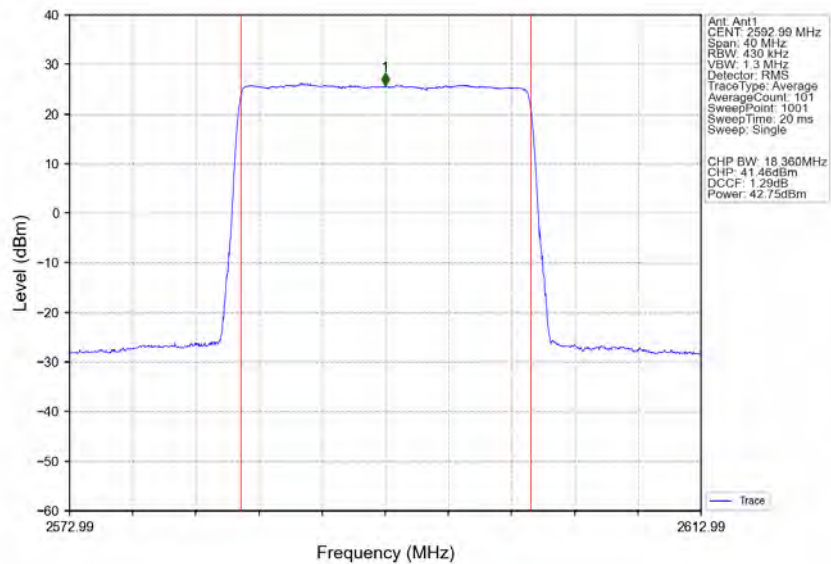


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

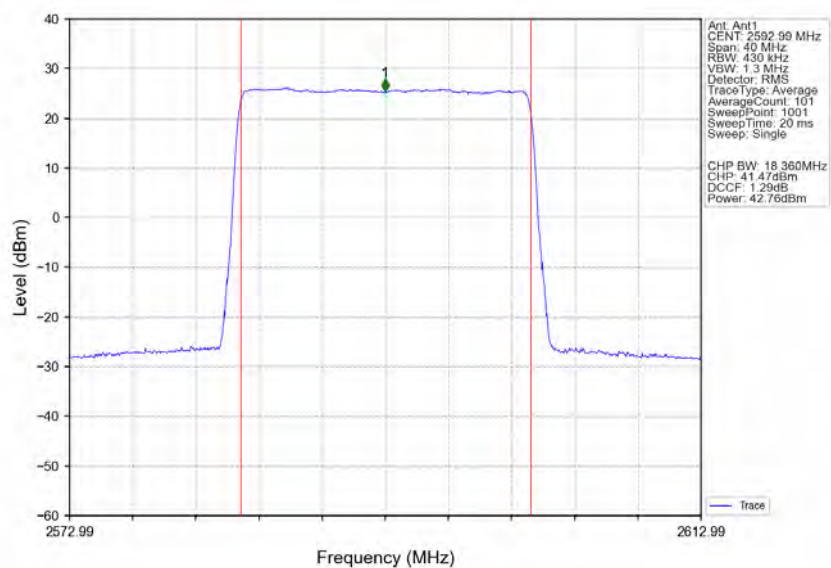


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

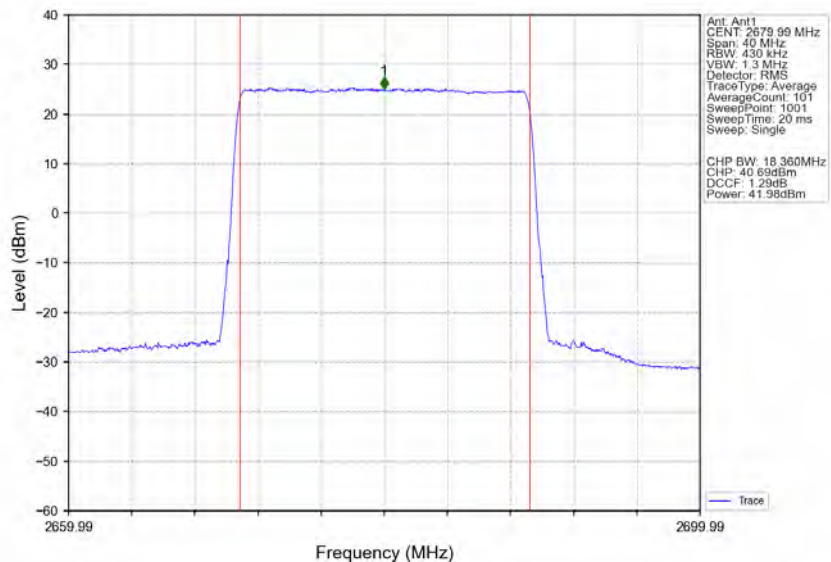


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

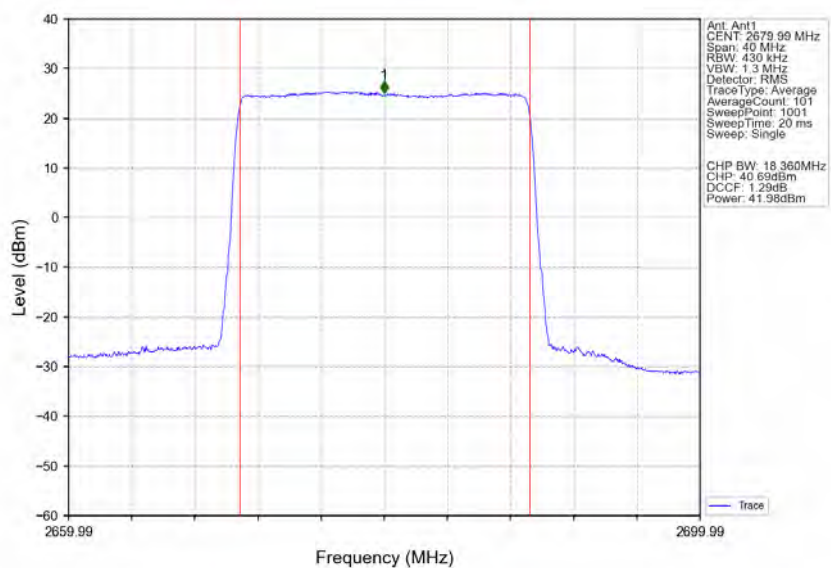


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

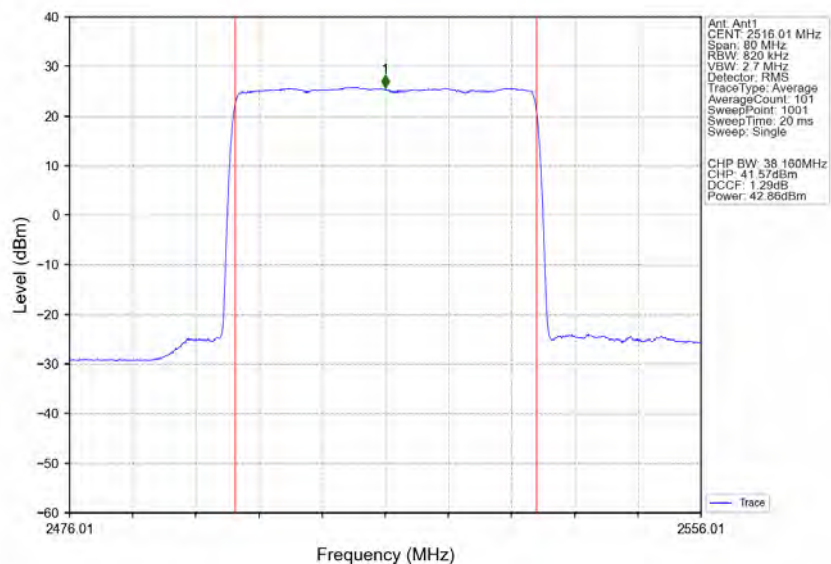


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

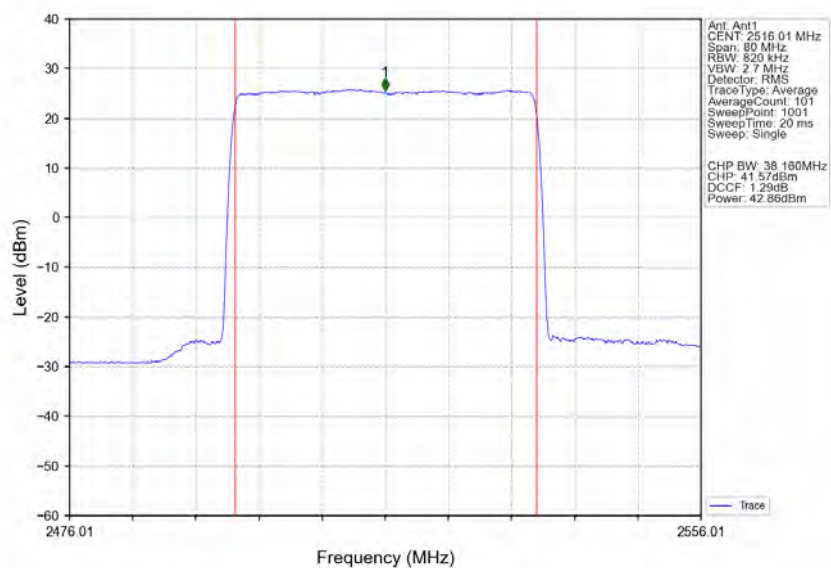


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2592.99MHz_Ant1

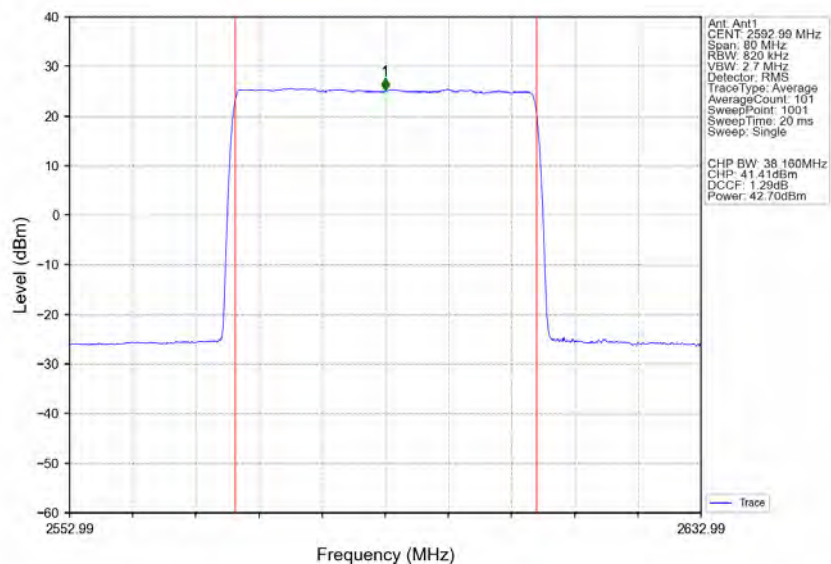


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2592.99MHz_Ant1

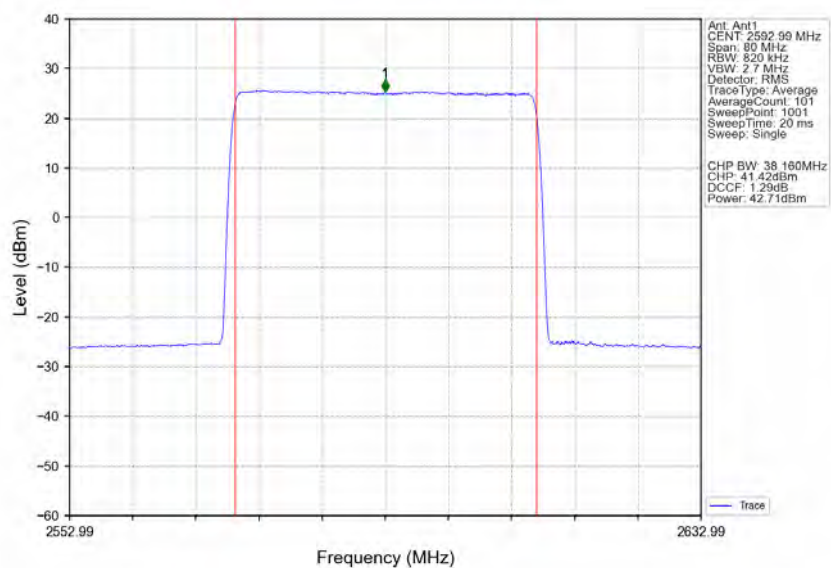


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2670MHz_Ant1

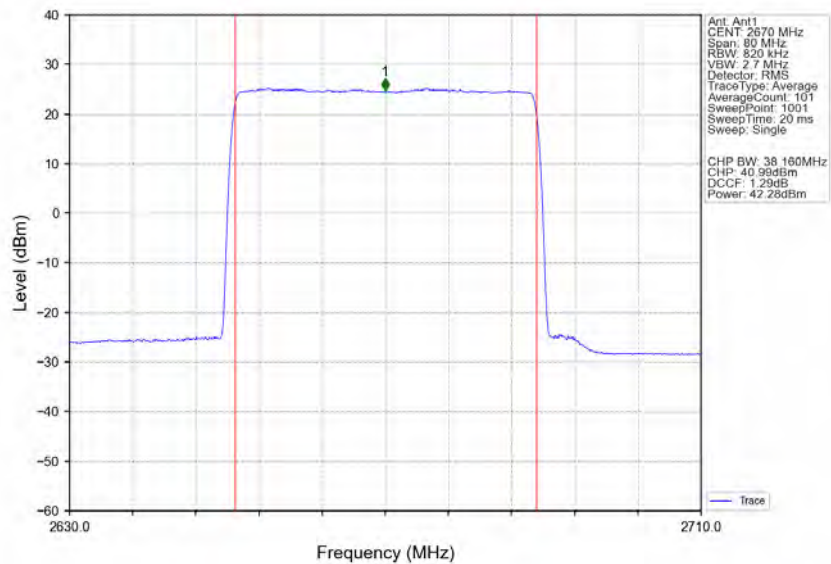


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2670MHz_Ant1

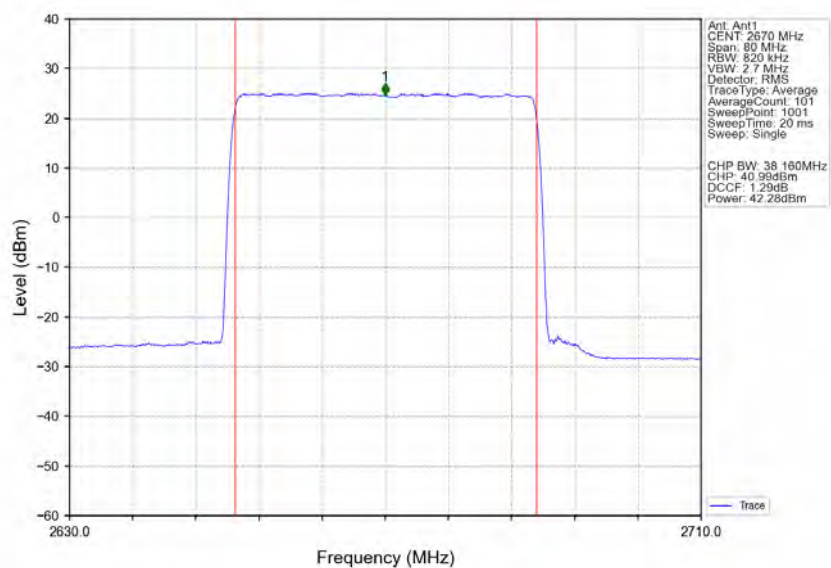


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2521.02MHz_Ant1

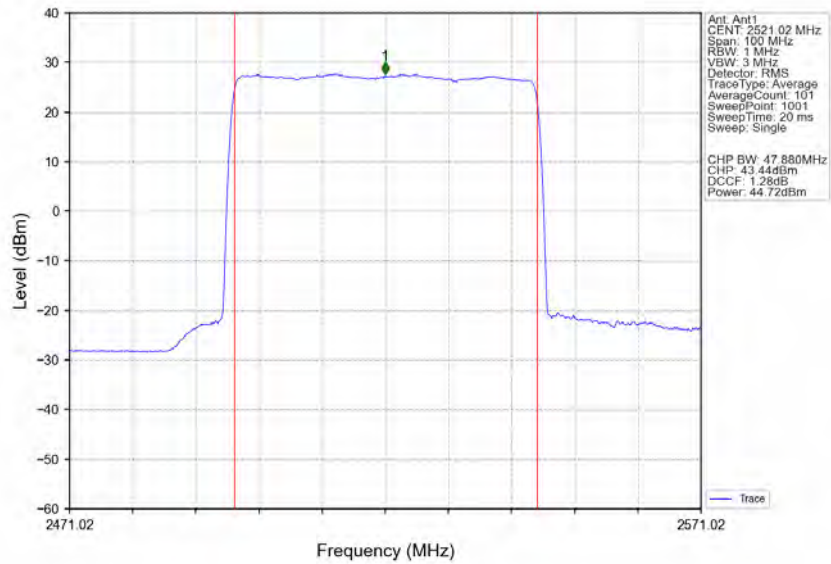


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2521.02MHz_Ant1

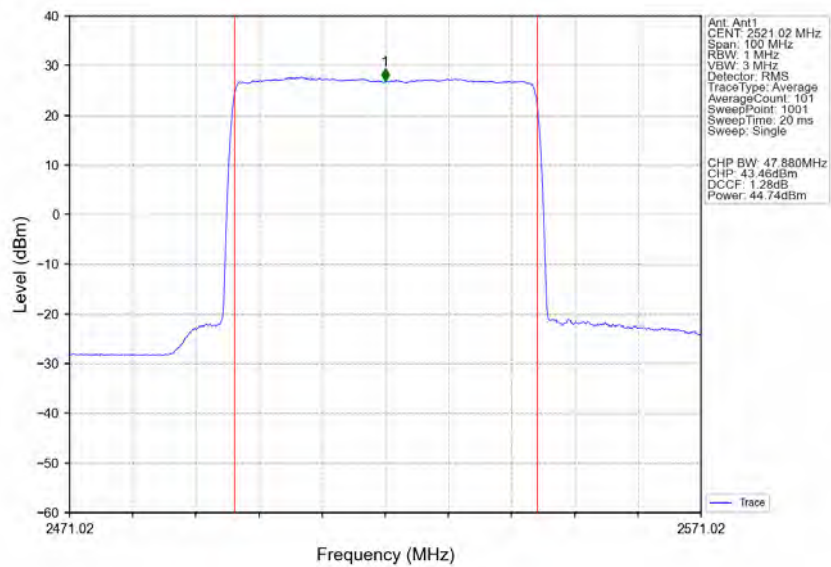


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2592.99MHz_Ant1

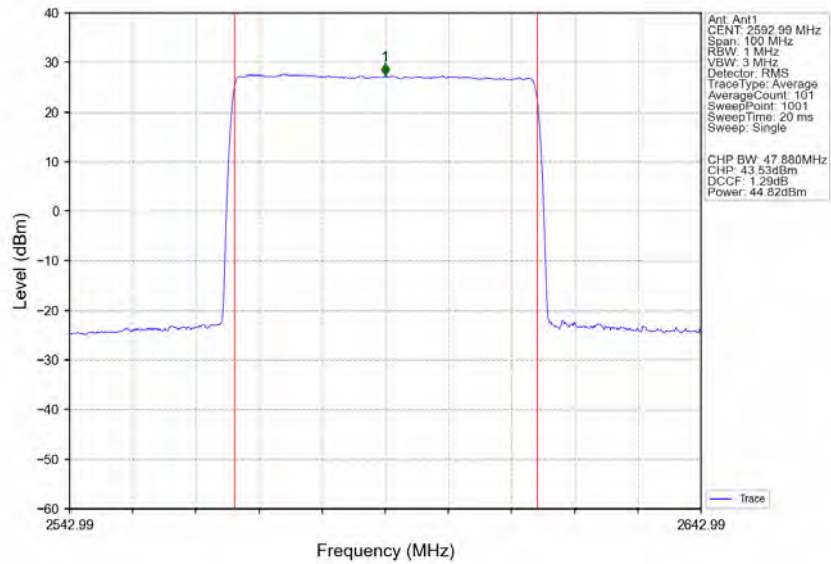


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2592.99MHz_Ant1

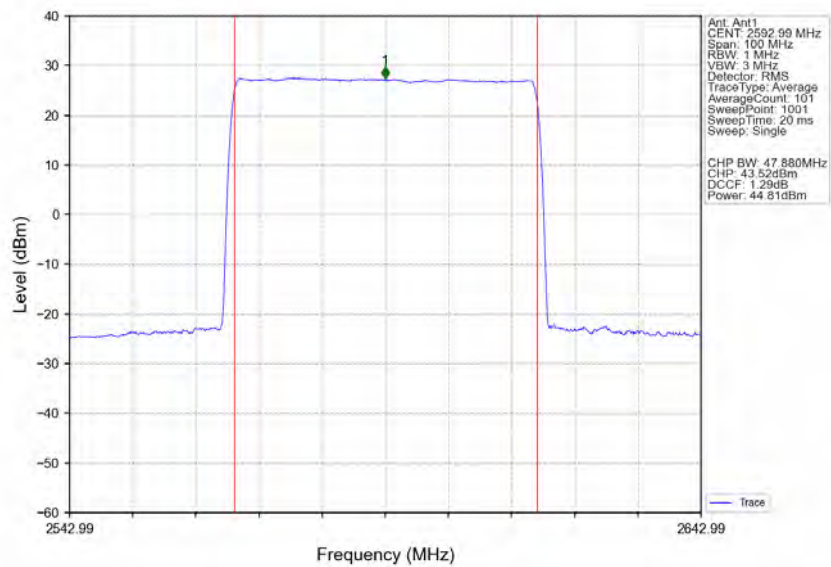


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2664.99MHz_Ant1

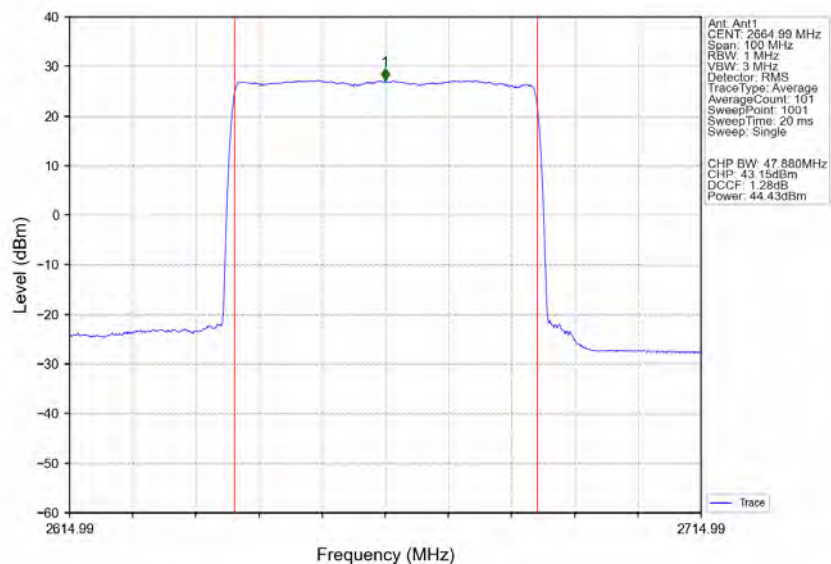


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2664.99MHz_Ant1

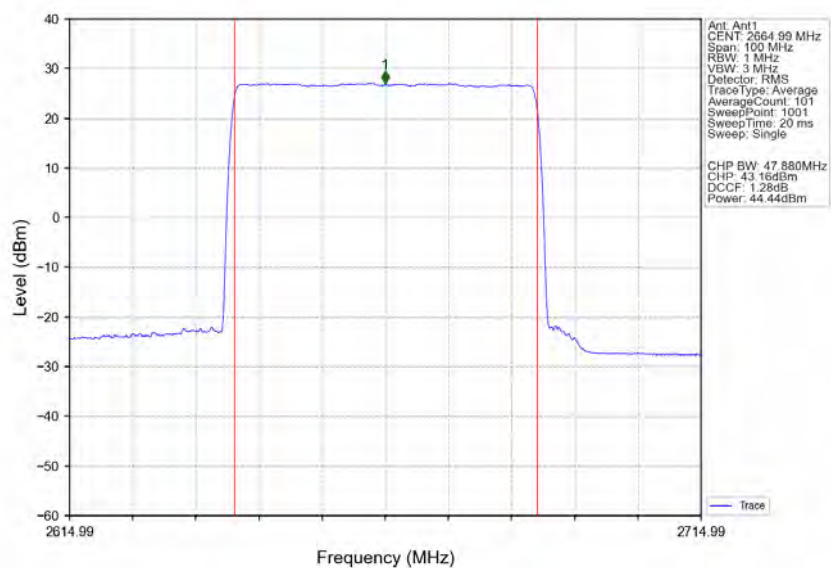


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2526MHz_Ant1

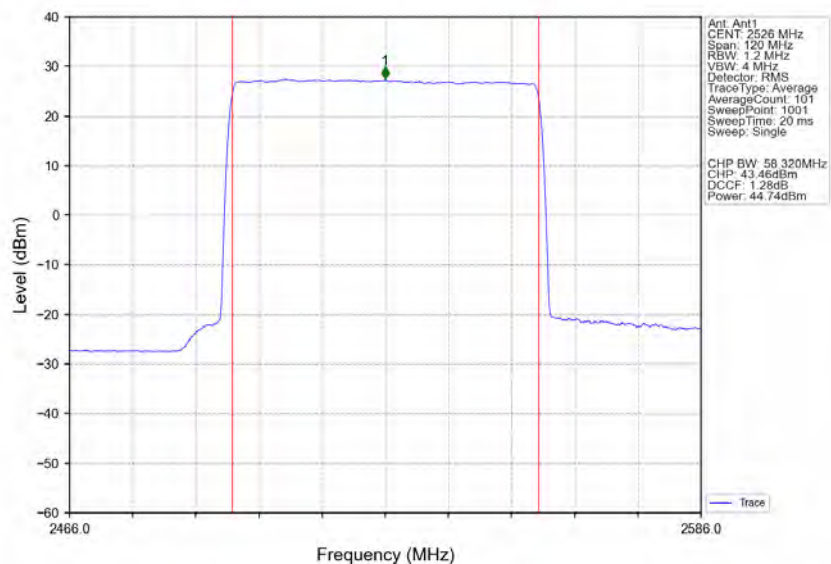


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2526MHz_Ant1

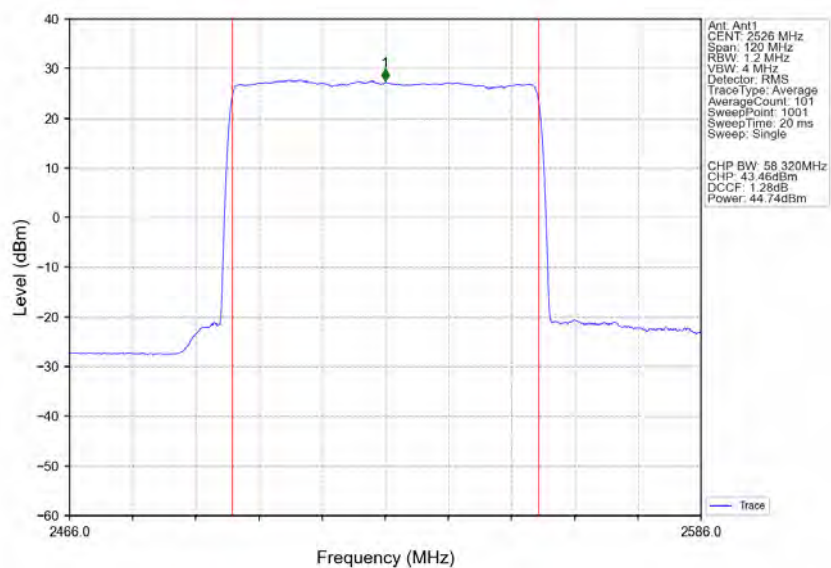


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2592.99MHz_Ant1

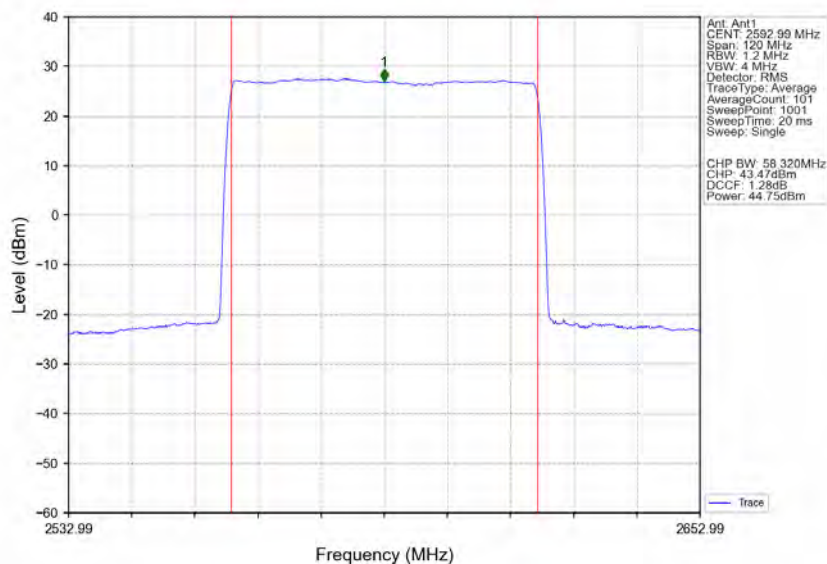


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2592.99MHz_Ant1

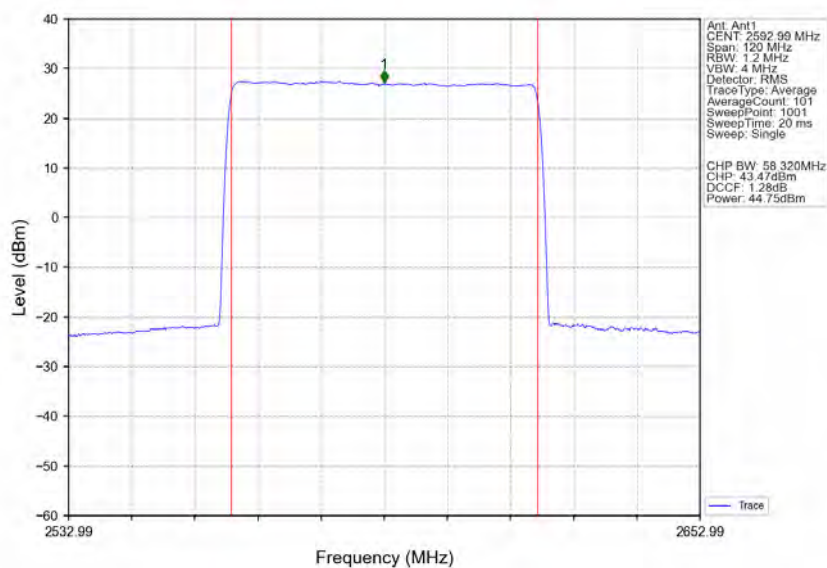


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2659.98MHz_Ant1

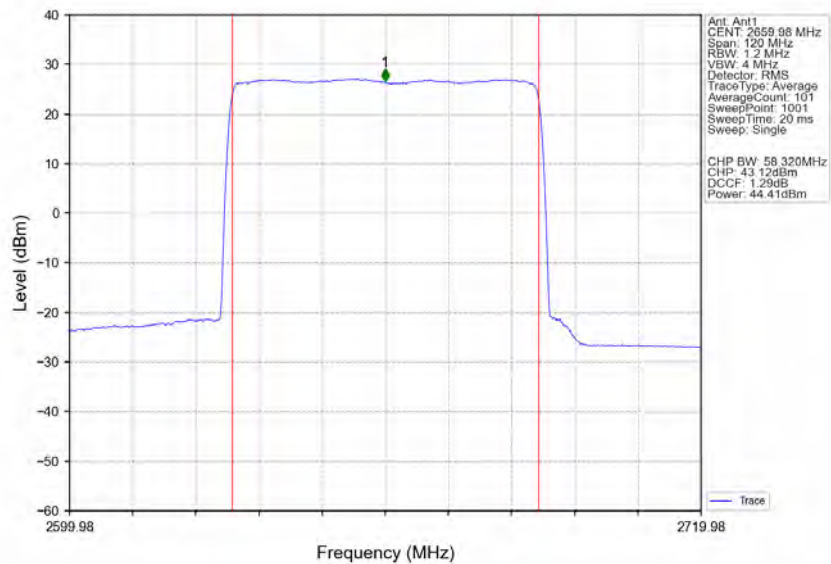


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2659.98MHz_Ant1

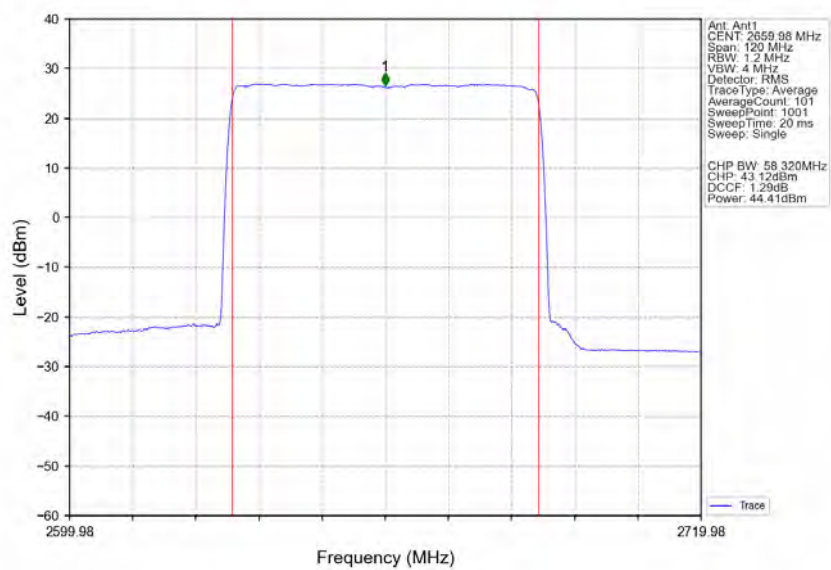


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2536.02MHz_Ant1

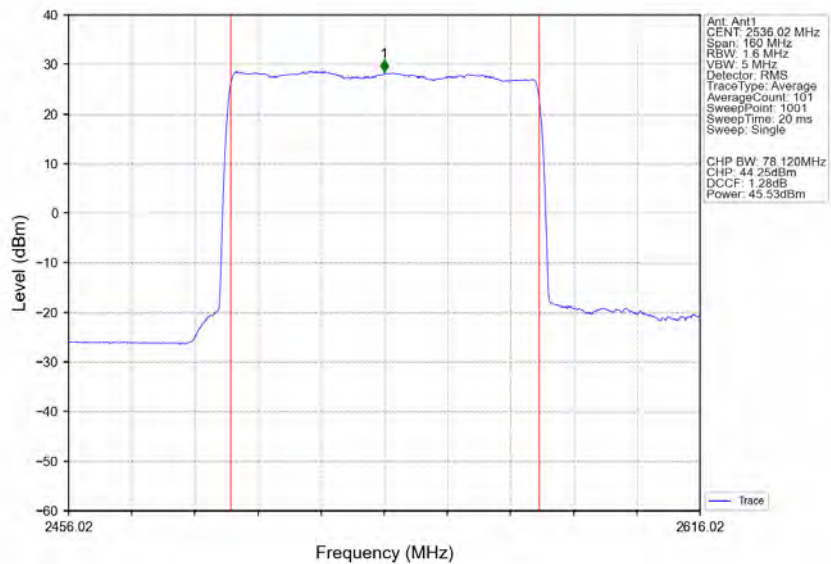


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2536.02MHz_Ant1

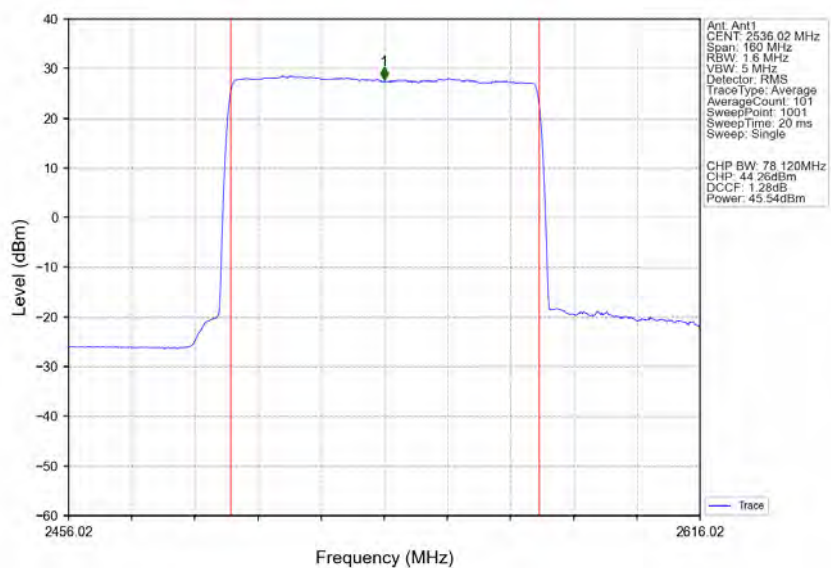


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2592.99MHz_Ant1

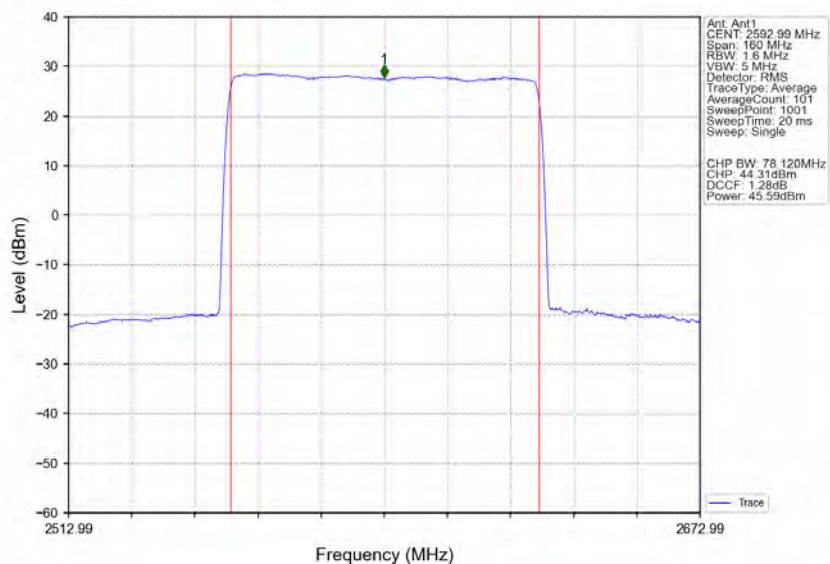


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2592.99MHz_Ant1

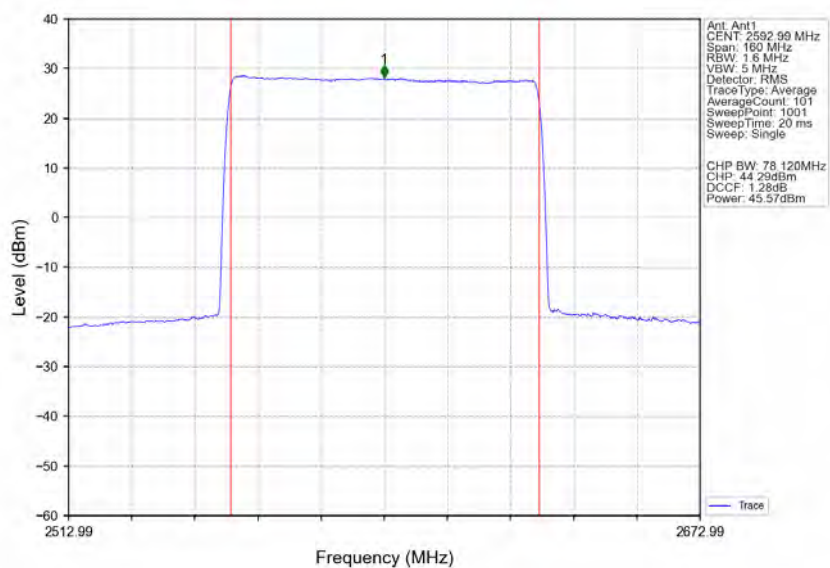


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2649.99MHz_Ant1

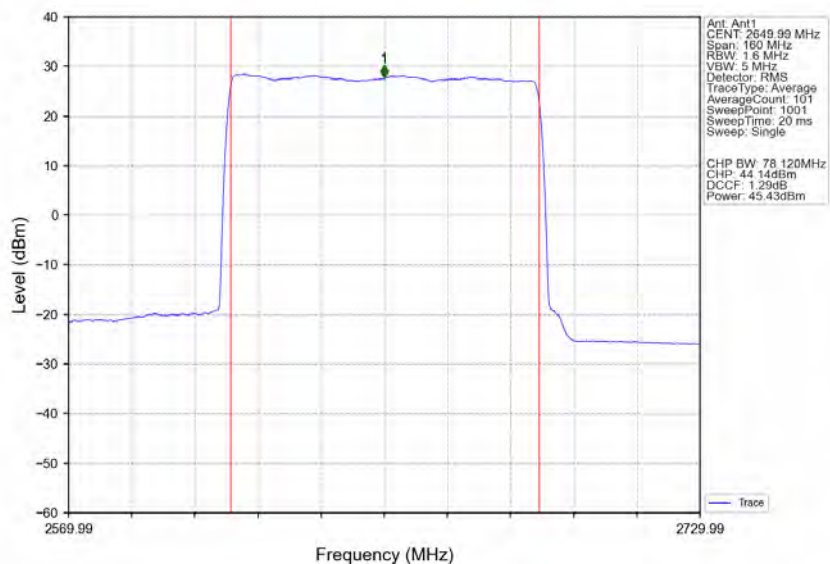


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2649.99MHz_Ant1

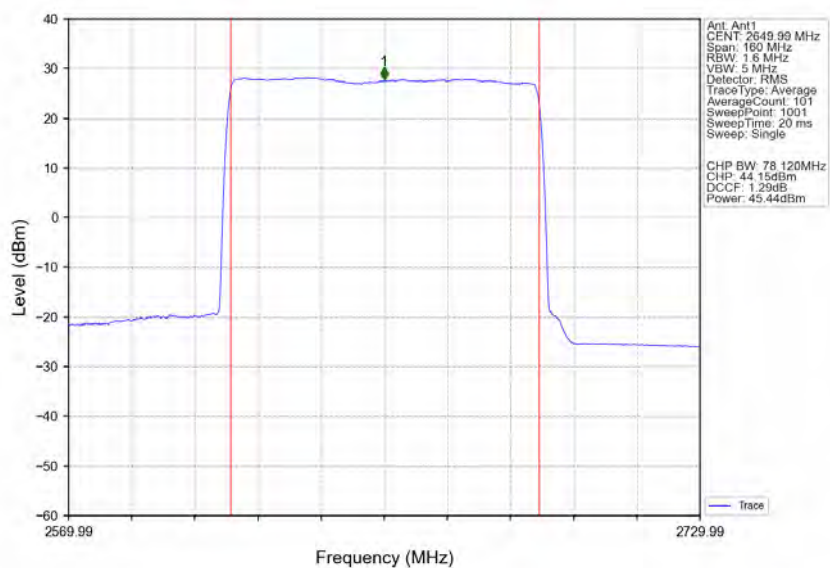


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2546.01MHz_Ant1

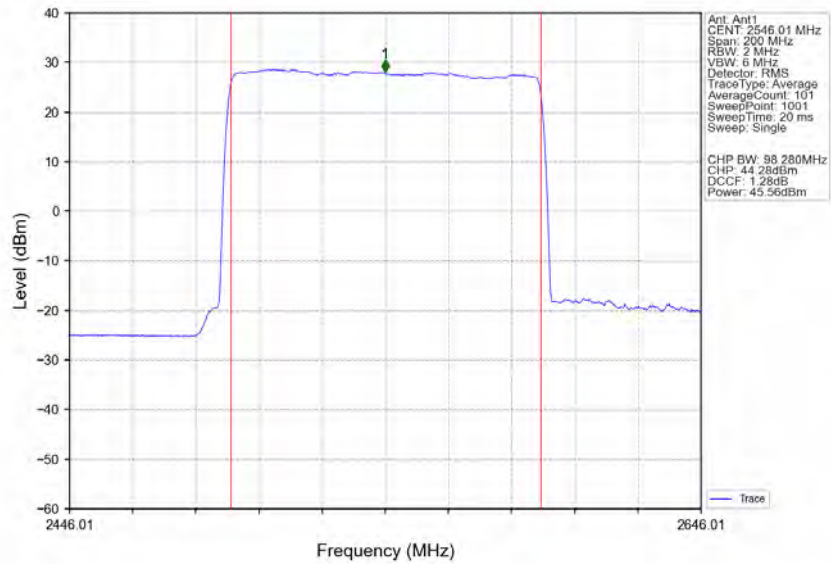


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2546.01MHz_Ant1

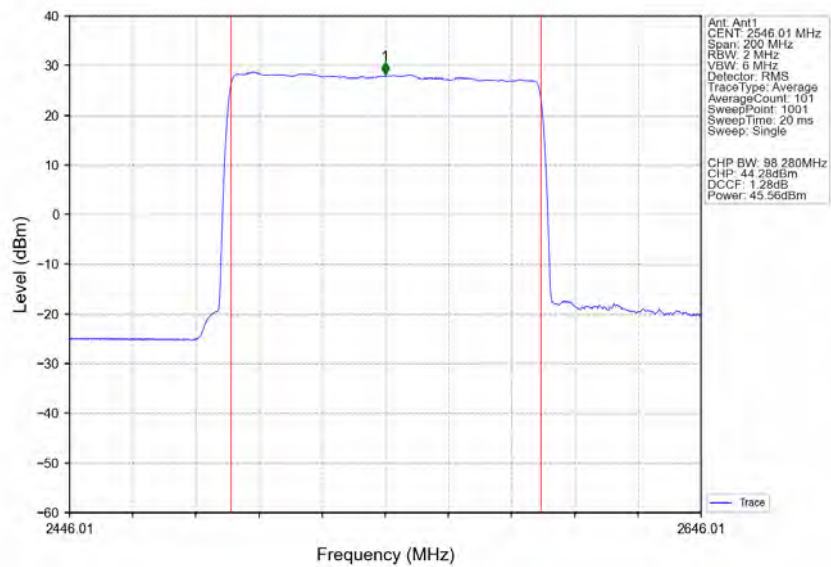


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2592.99MHz_Ant1

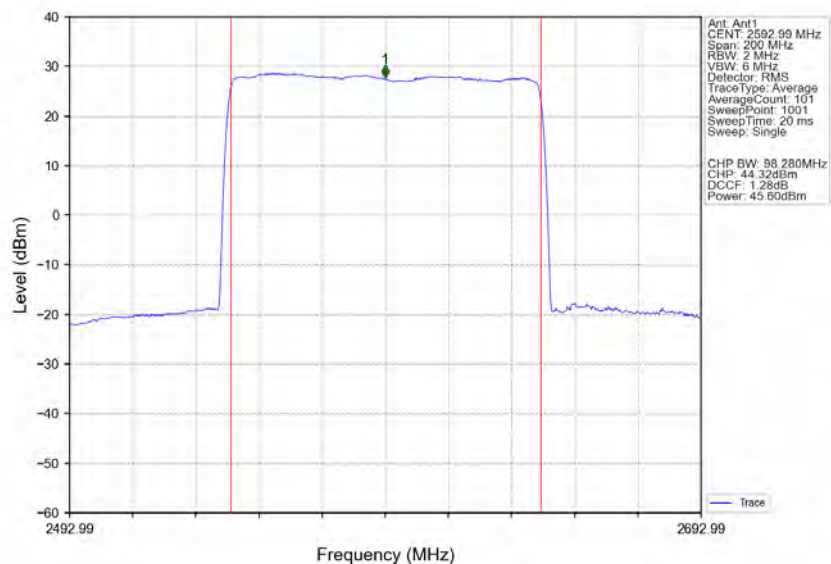


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2592.99MHz_Ant1

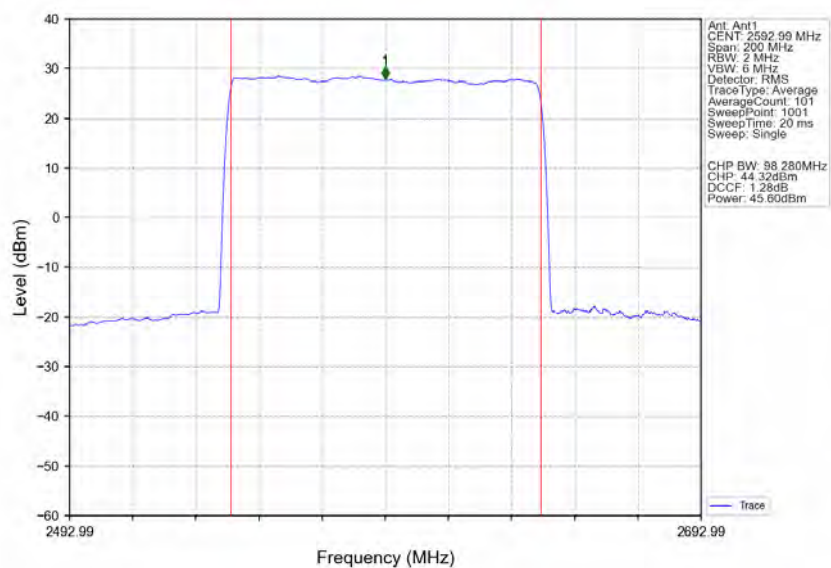

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_QPSK_CC1:2640MHz_Ant1

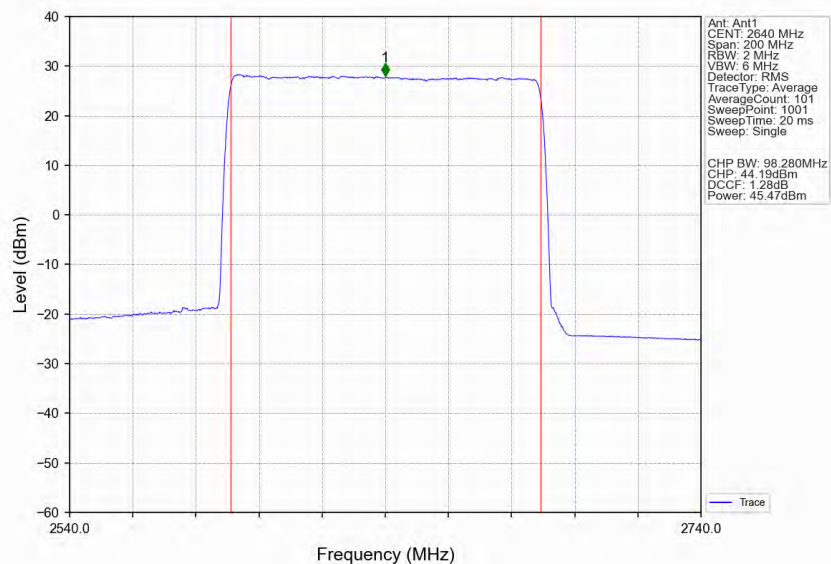

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_256QAM_CC1:2640MHz_Ant1

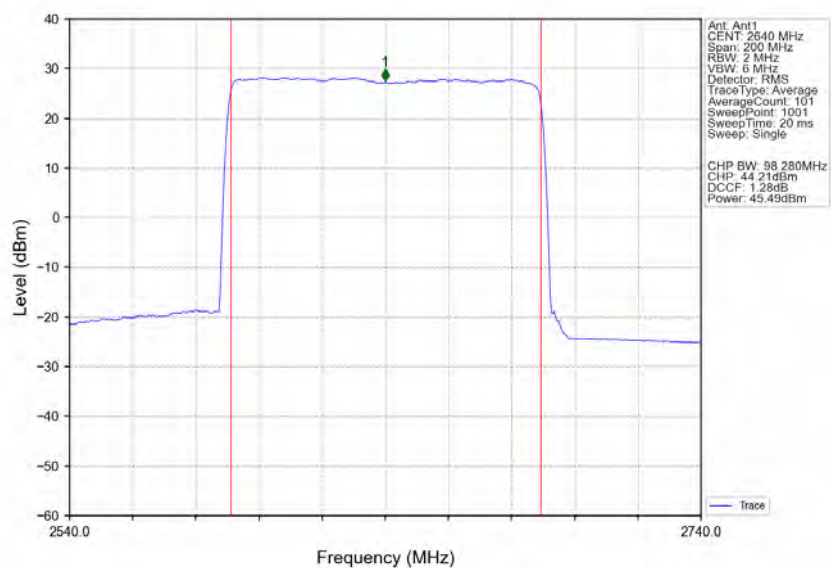

3. 99% & 26dB Bandwidth

3.1 Test Result

3.1.1 30_Single_OBW

Band n41 Single NTN						
BW (MHz)	DL Frequency (MHz)	Test Mode	Ant No.	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
CC1:20	CC1:2506.02	QPSK	1	18.29	/	Pass
		256QAM	1	18.32	/	Pass
	CC1:2592.99	QPSK	1	18.30	/	Pass
		256QAM	1	18.32	/	Pass
	CC1:2679.99	QPSK	1	18.30	/	Pass
		256QAM	1	18.33	/	Pass
CC1:40	CC1:2516.01	QPSK	1	37.93	/	Pass
		256QAM	1	37.97	/	Pass
	CC1:2592.99	QPSK	1	37.97	/	Pass
		256QAM	1	37.99	/	Pass
	CC1:2670	QPSK	1	37.96	/	Pass
		256QAM	1	37.94	/	Pass
CC1:50	CC1:2521.02	QPSK	1	47.61	/	Pass
		256QAM	1	47.59	/	Pass
	CC1:2592.99	QPSK	1	47.63	/	Pass
		256QAM	1	47.62	/	Pass
	CC1:2664.99	QPSK	1	47.54	/	Pass
		256QAM	1	47.66	/	Pass
CC1:60	CC1:2526	QPSK	1	58.00	/	Pass
		256QAM	1	57.99	/	Pass
	CC1:2592.99	QPSK	1	58.09	/	Pass
		256QAM	1	58.03	/	Pass
	CC1:2659.98	QPSK	1	58.02	/	Pass
		256QAM	1	58.01	/	Pass
CC1:80	CC1:2536.02	QPSK	1	77.51	/	Pass
		256QAM	1	77.55	/	Pass
	CC1:2592.99	QPSK	1	77.56	/	Pass
		256QAM	1	77.65	/	Pass
	CC1:2649.99	QPSK	1	77.62	/	Pass
		256QAM	1	77.68	/	Pass
CC1:100	CC1:2546.01	QPSK	1	97.46	/	Pass
		256QAM	1	97.44	/	Pass
	CC1:2592.99	QPSK	1	97.59	/	Pass
		256QAM	1	97.56	/	Pass
	CC1:2640	QPSK	1	97.49	/	Pass
		256QAM	1	97.56	/	Pass


3.1.2 30_Single_XDB

Band n41 Single NTN					
BW	DL Frequency	Test	Ant	26dB Bandwidth (MHz)	Verdict


(MHz)	(MHz)	Mode	No.	Result	Limit	
CC1:20	CC1:2506.02	QPSK	1	19.85	/	Pass
		256QAM	1	19.79	/	Pass
	CC1:2592.99	QPSK	1	19.84	/	Pass
		256QAM	1	19.87	/	Pass
	CC1:2679.99	QPSK	1	19.91	/	Pass
		256QAM	1	19.97	/	Pass
CC1:40	CC1:2516.01	QPSK	1	40.29	/	Pass
		256QAM	1	40.25	/	Pass
	CC1:2592.99	QPSK	1	40.40	/	Pass
		256QAM	1	40.30	/	Pass
	CC1:2670	QPSK	1	40.16	/	Pass
		256QAM	1	40.16	/	Pass
CC1:50	CC1:2521.02	QPSK	1	50.23	/	Pass
		256QAM	1	50.21	/	Pass
	CC1:2592.99	QPSK	1	50.46	/	Pass
		256QAM	1	50.40	/	Pass
	CC1:2664.99	QPSK	1	50.36	/	Pass
		256QAM	1	50.27	/	Pass
CC1:60	CC1:2526	QPSK	1	61.23	/	Pass
		256QAM	1	61.21	/	Pass
	CC1:2592.99	QPSK	1	61.17	/	Pass
		256QAM	1	61.13	/	Pass
	CC1:2659.98	QPSK	1	61.07	/	Pass
		256QAM	1	61.16	/	Pass
CC1:80	CC1:2536.02	QPSK	1	81.64	/	Pass
		256QAM	1	81.77	/	Pass
	CC1:2592.99	QPSK	1	81.74	/	Pass
		256QAM	1	81.71	/	Pass
	CC1:2649.99	QPSK	1	81.75	/	Pass
		256QAM	1	81.76	/	Pass
CC1:100	CC1:2546.01	QPSK	1	102.78	/	Pass
		256QAM	1	102.68	/	Pass
	CC1:2592.99	QPSK	1	102.81	/	Pass
		256QAM	1	102.85	/	Pass
	CC1:2640	QPSK	1	102.83	/	Pass
		256QAM	1	102.83	/	Pass

3.2 Test Graph


3.2.1 30_Single_OBW

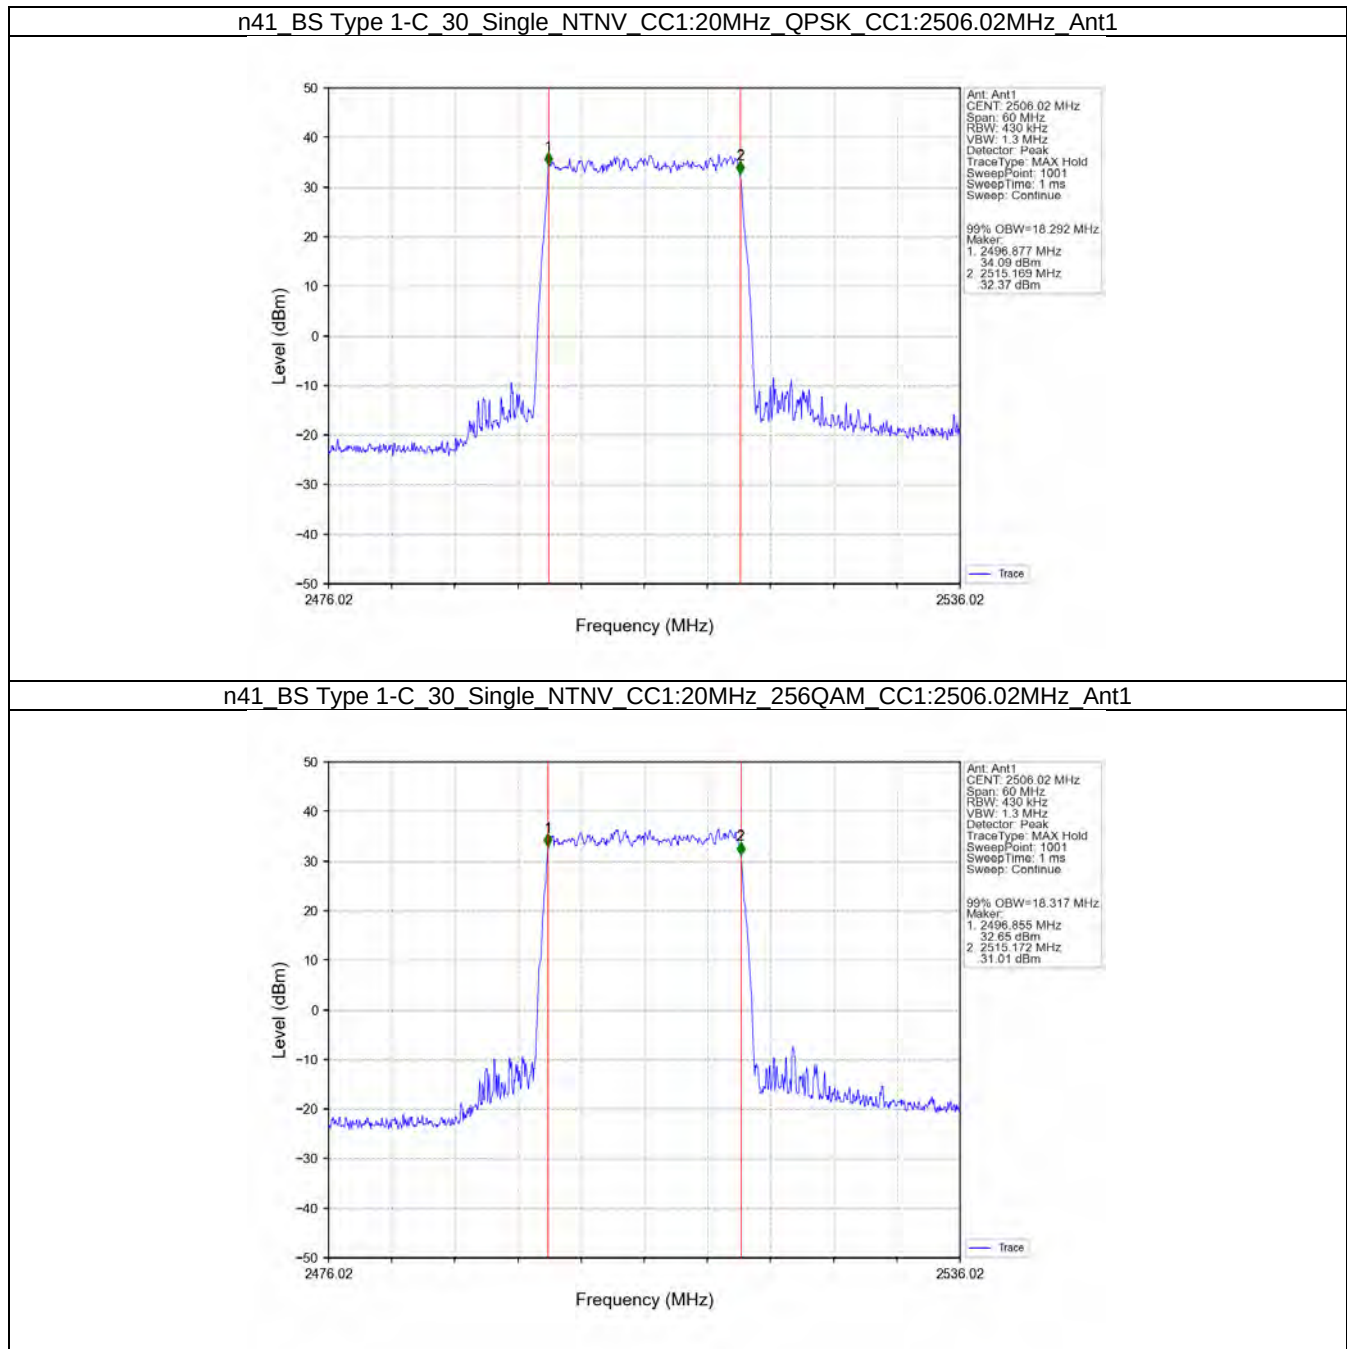


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

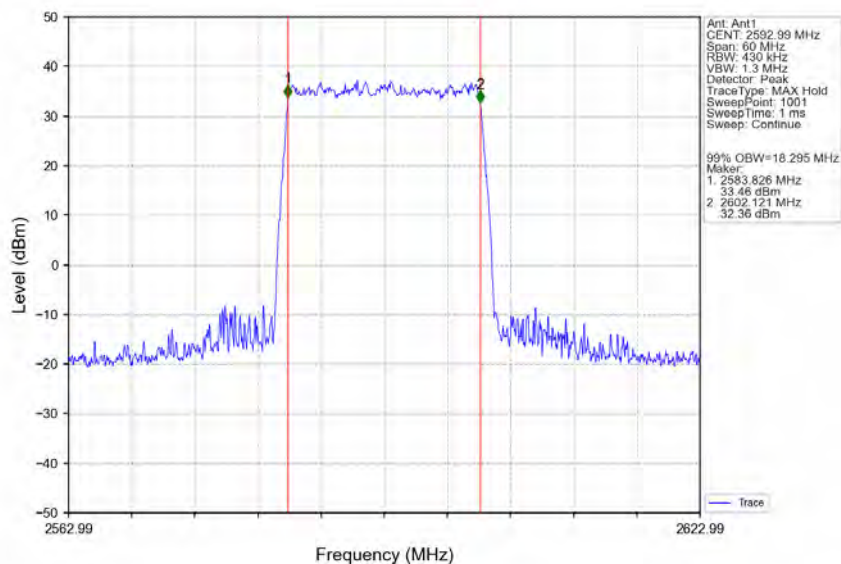


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

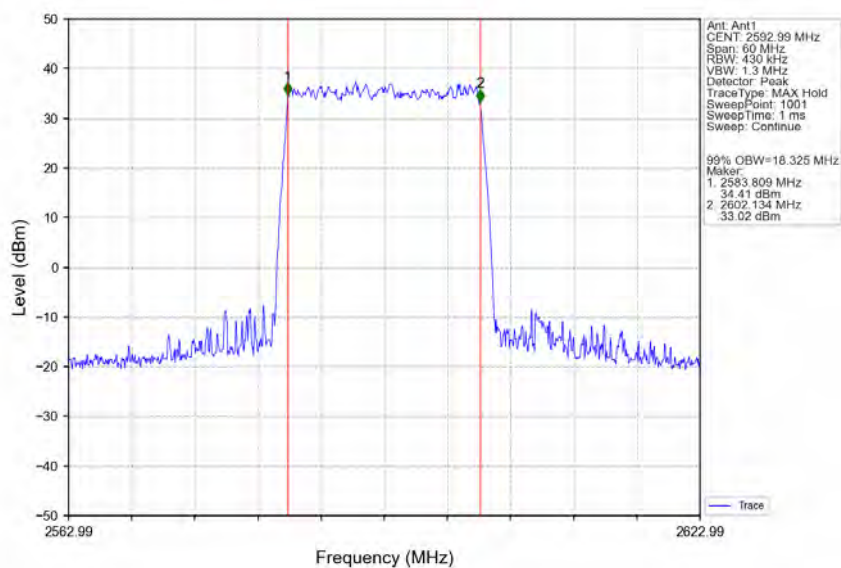


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

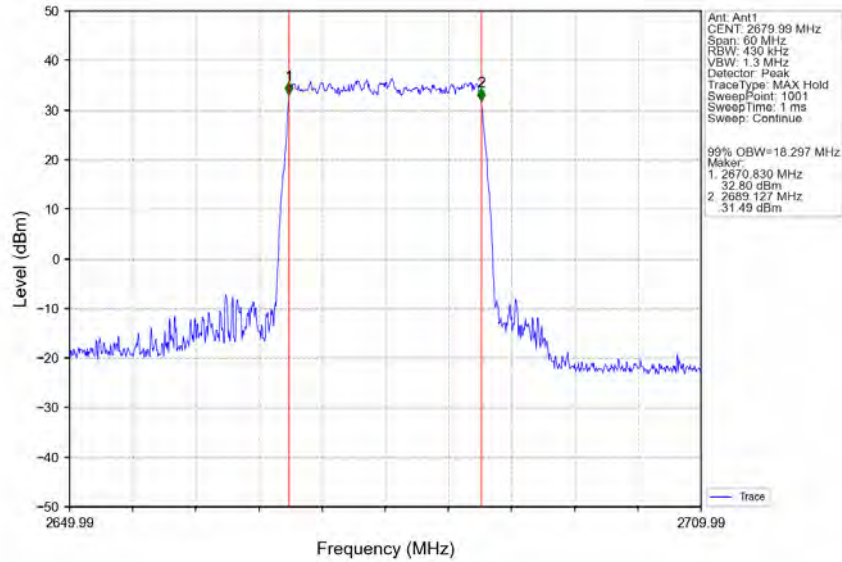


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

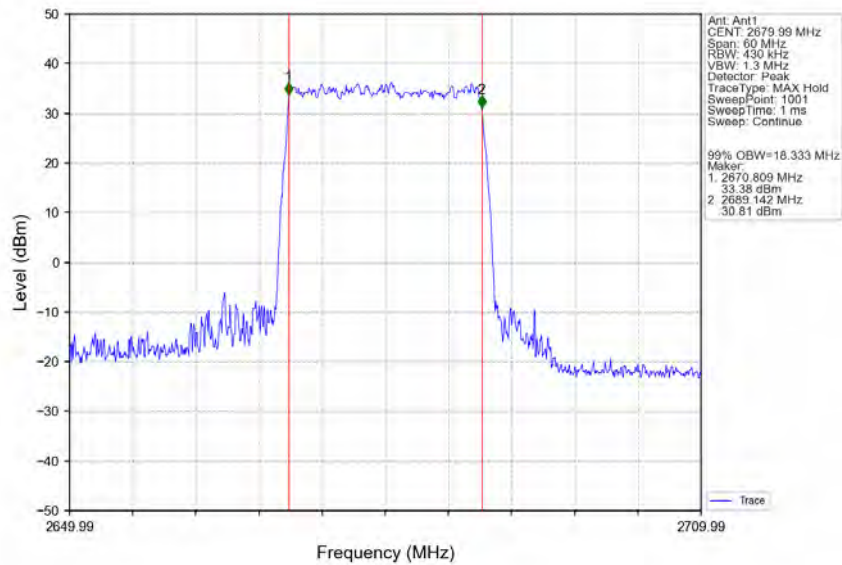


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

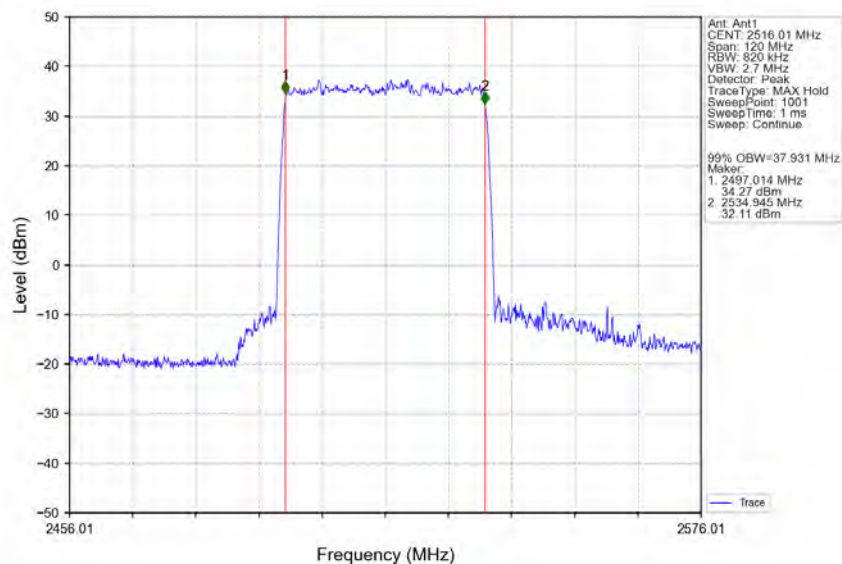


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

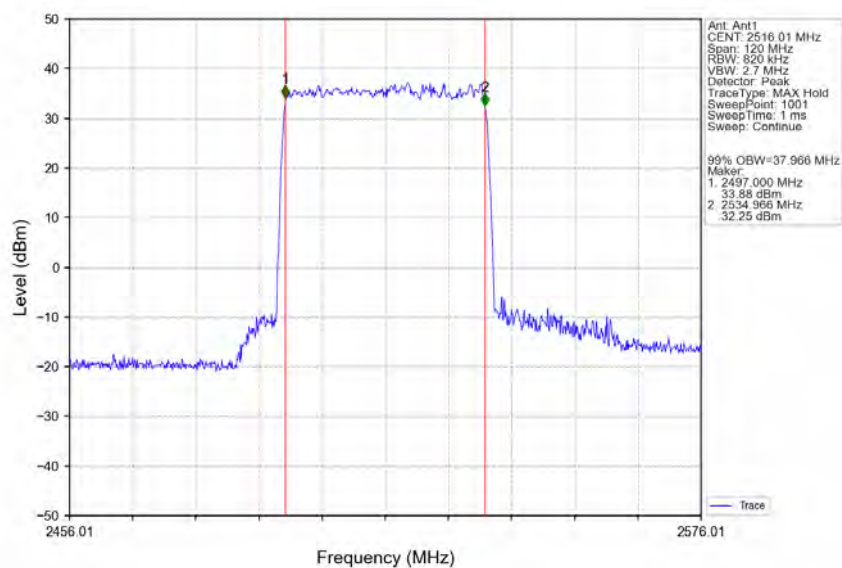


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2592.99MHz_Ant1

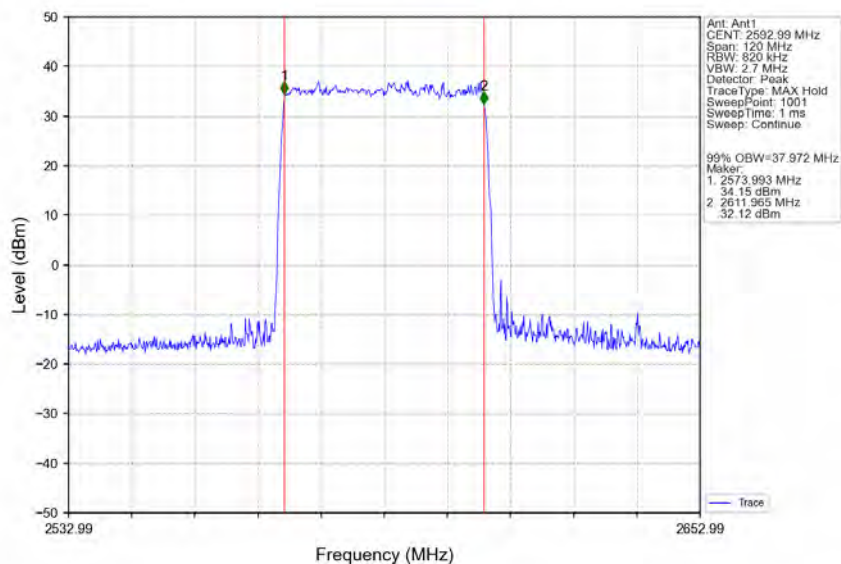


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2592.99MHz_Ant1

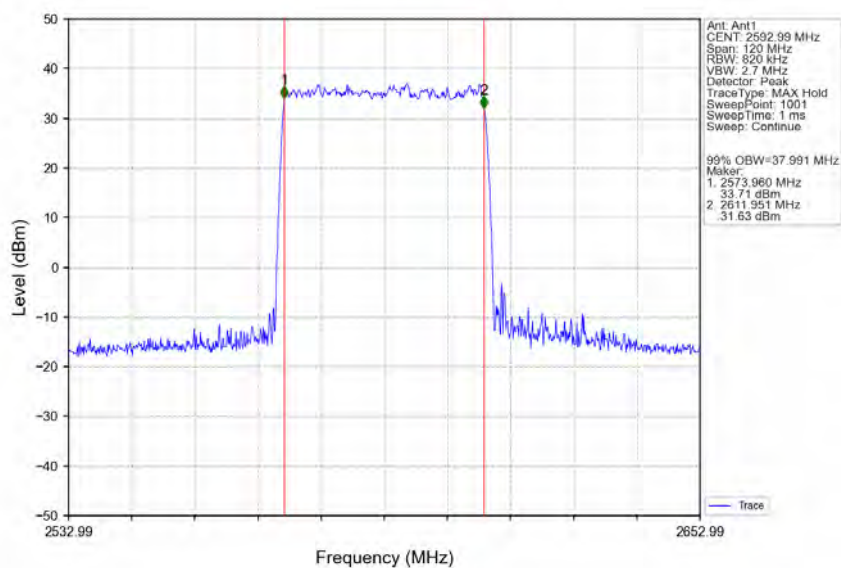


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2670MHz_Ant1

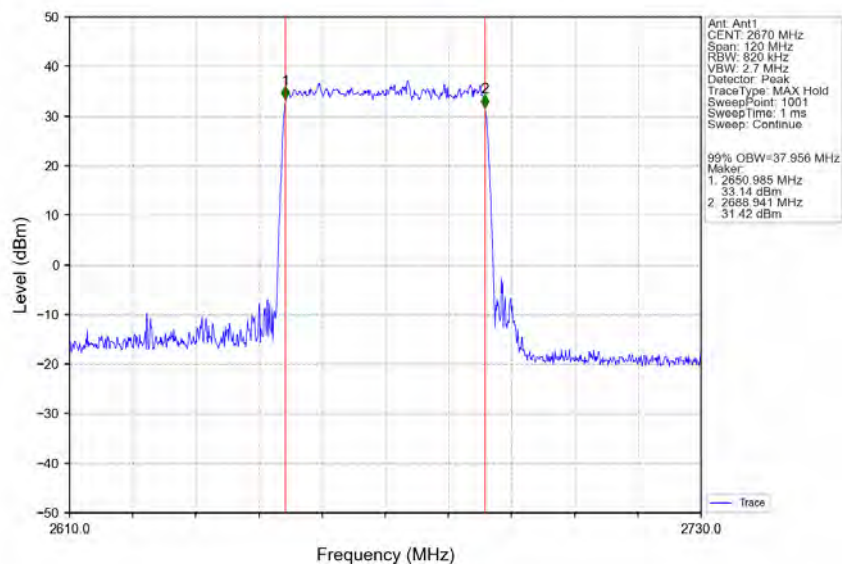


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2670MHz_Ant1

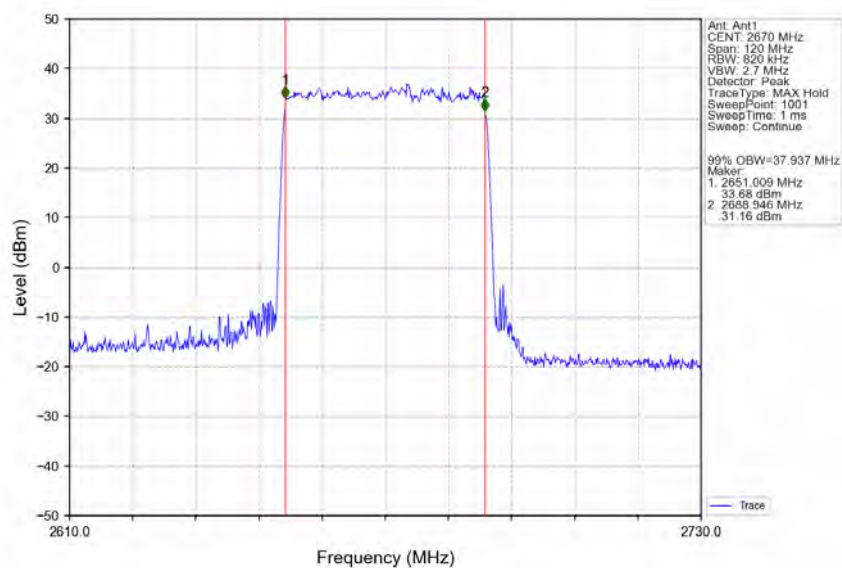


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2521.02MHz_Ant1

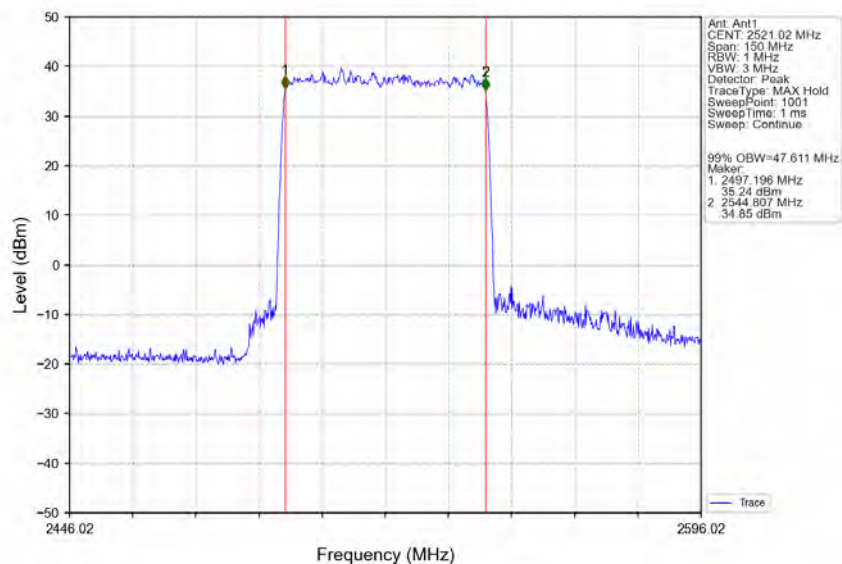


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2521.02MHz_Ant1

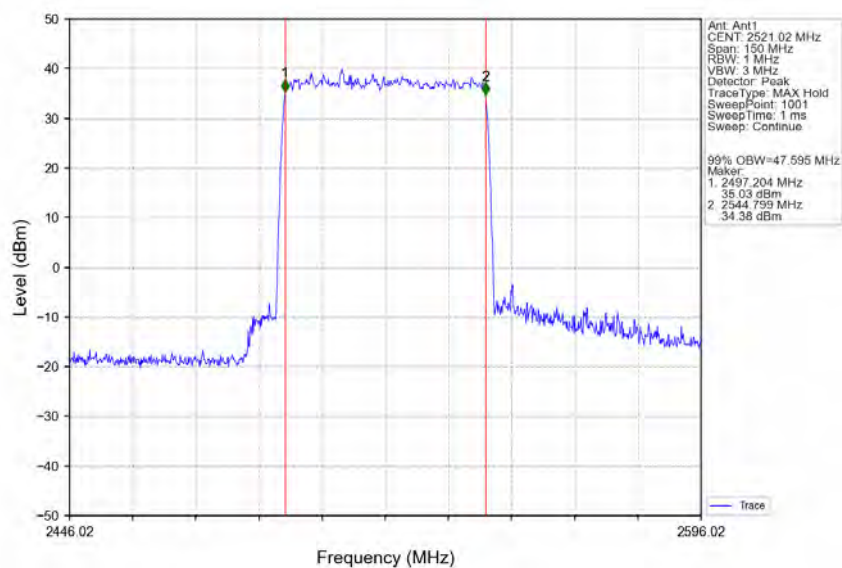


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2592.99MHz_Ant1

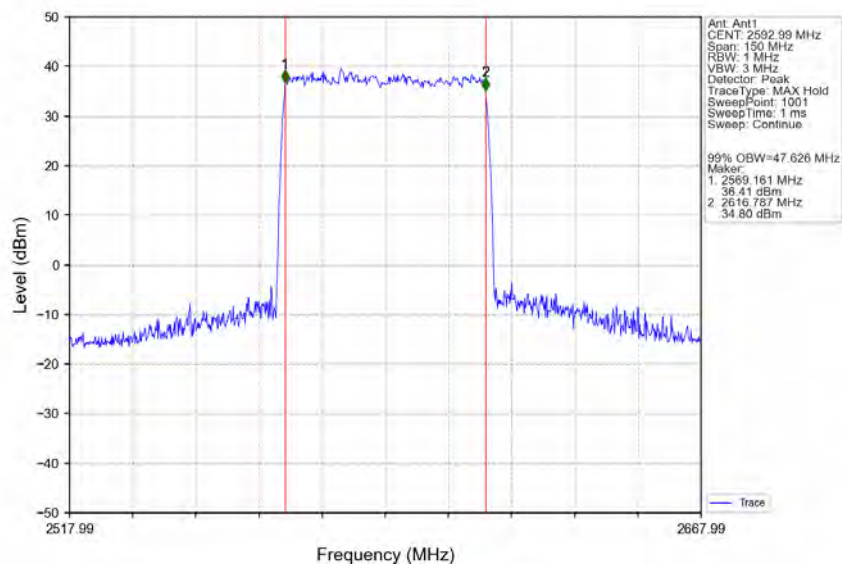


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2592.99MHz_Ant1

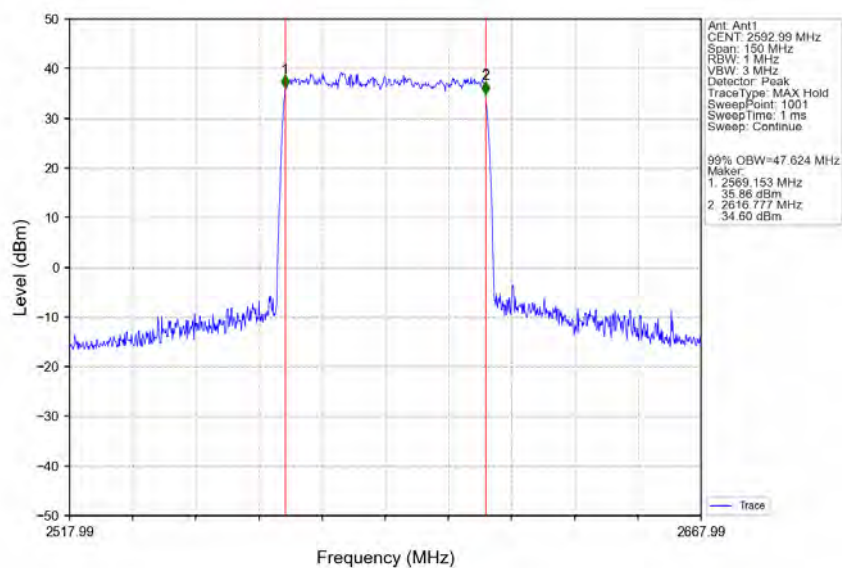


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2664.99MHz_Ant1

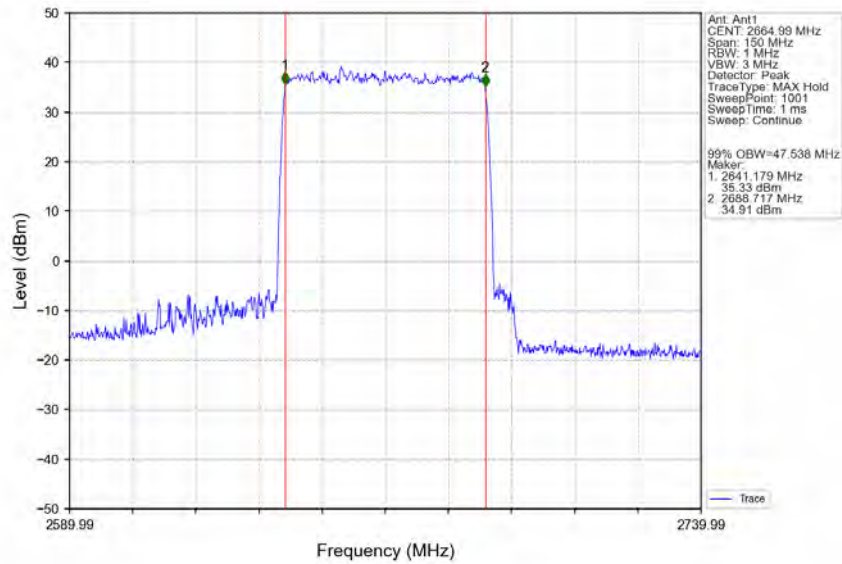


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2664.99MHz_Ant1

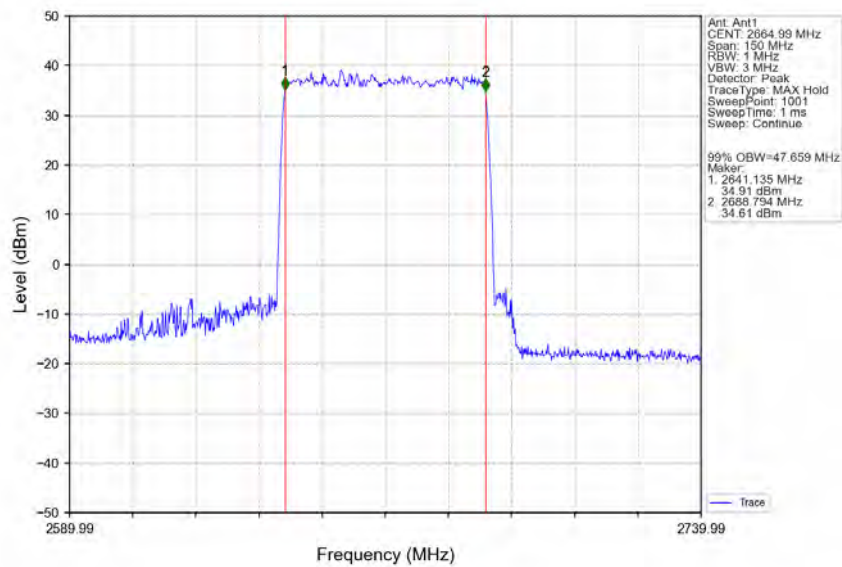


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2526MHz_Ant1

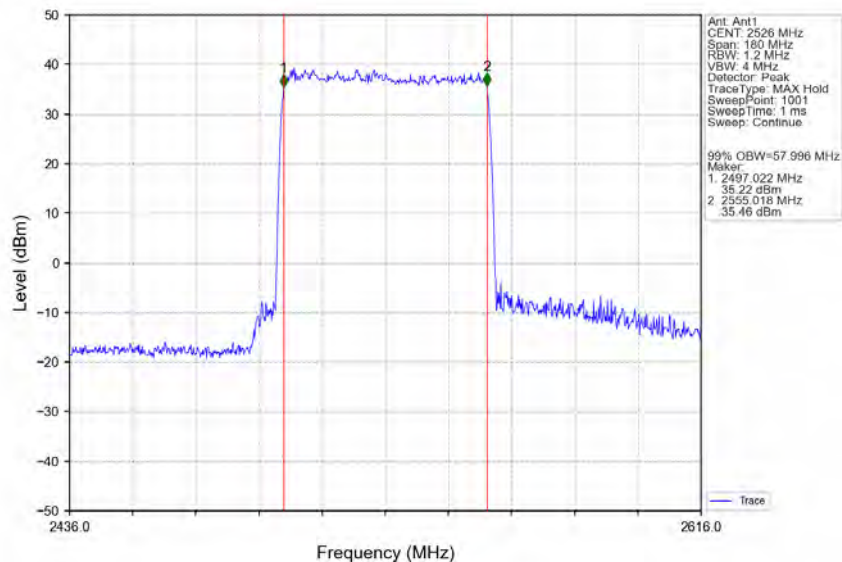


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2526MHz_Ant1

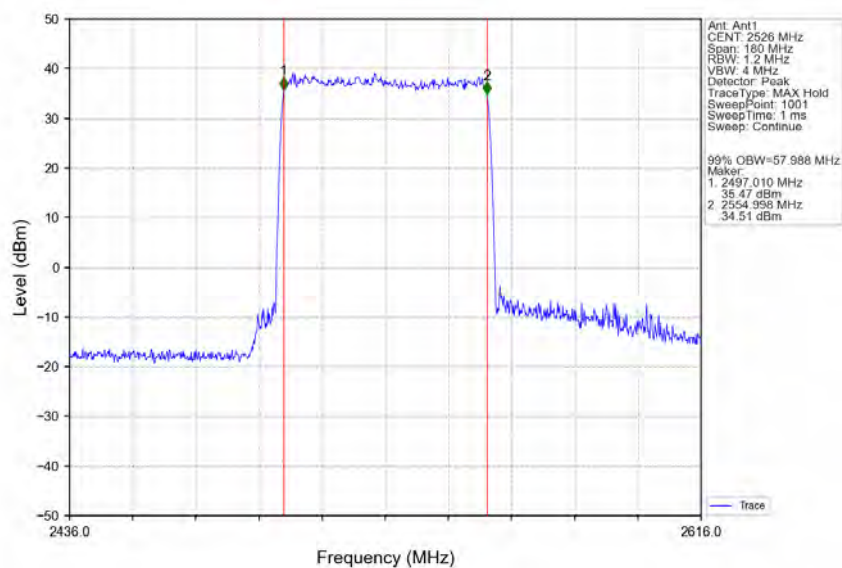


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2592.99MHz_Ant1

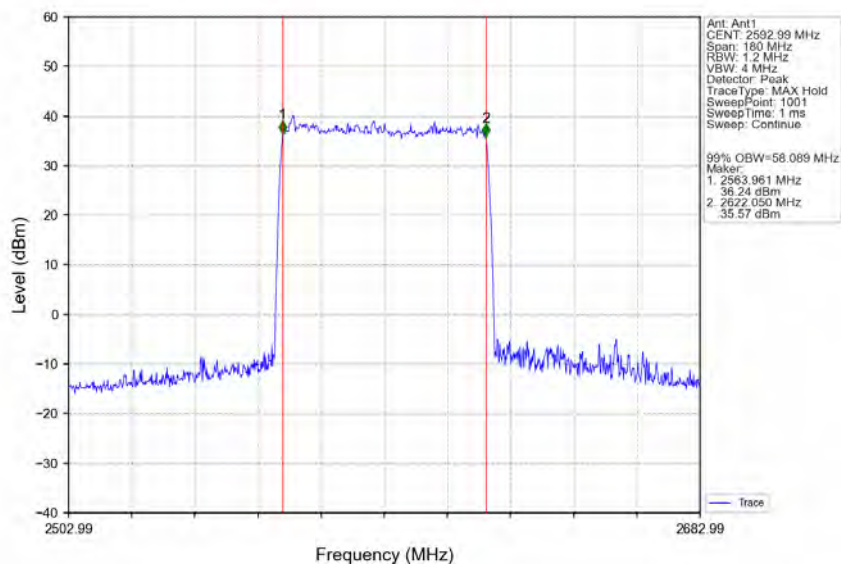


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2592.99MHz_Ant1

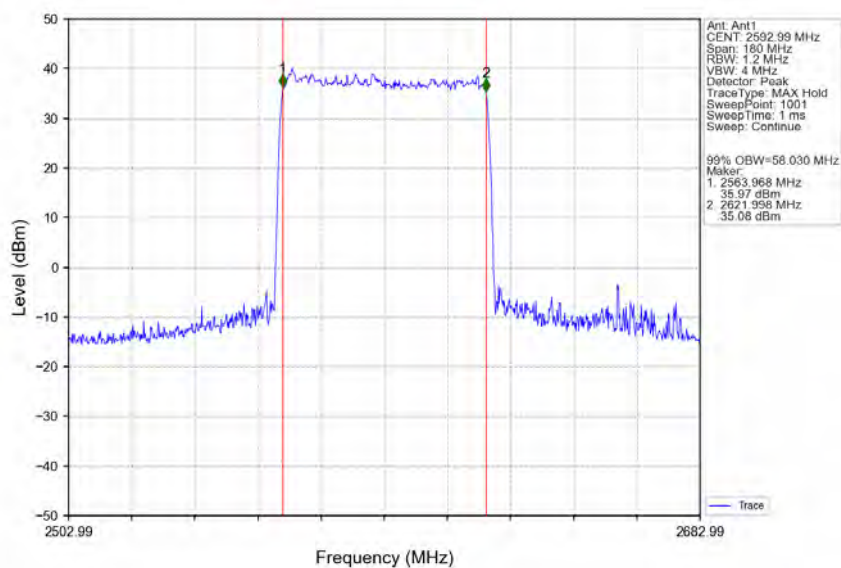


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2659.98MHz_Ant1

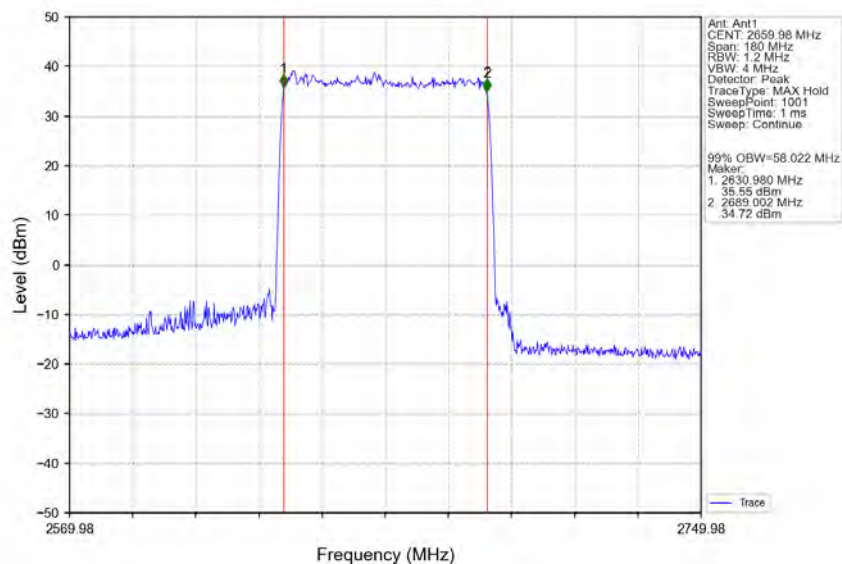


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2659.98MHz_Ant1

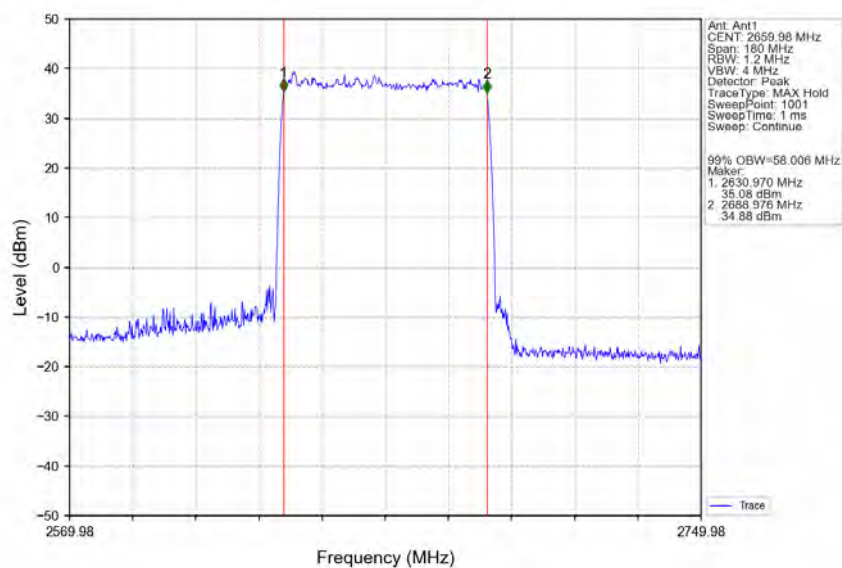


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2536.02MHz_Ant1

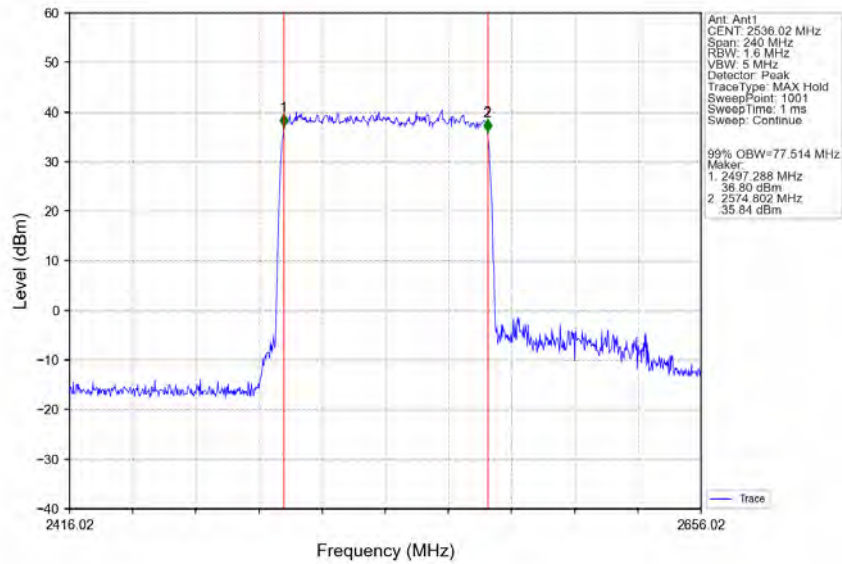


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2536.02MHz_Ant1

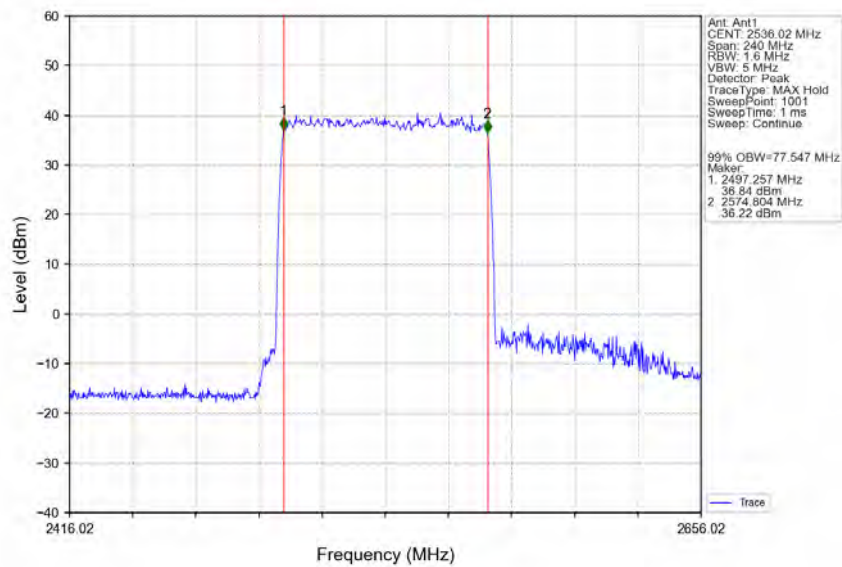


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2592.99MHz_Ant1

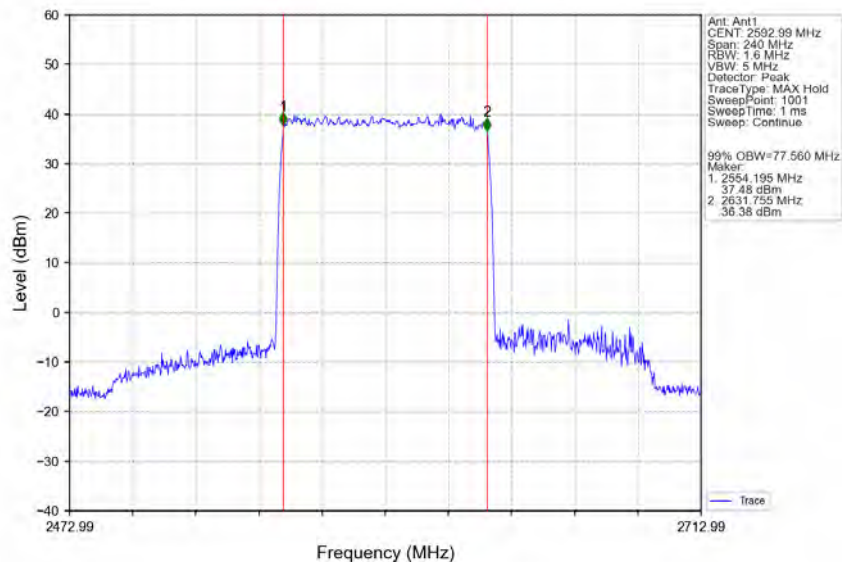


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2592.99MHz_Ant1

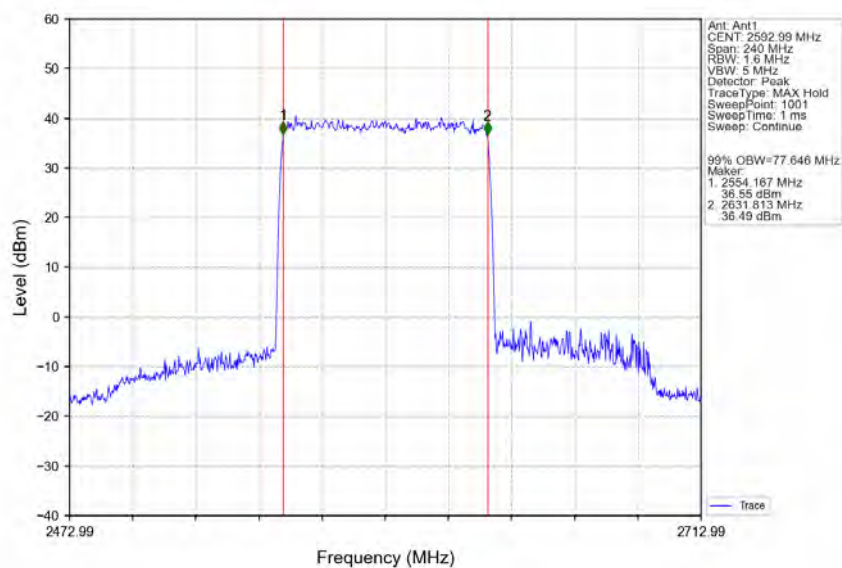


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2649.99MHz_Ant1

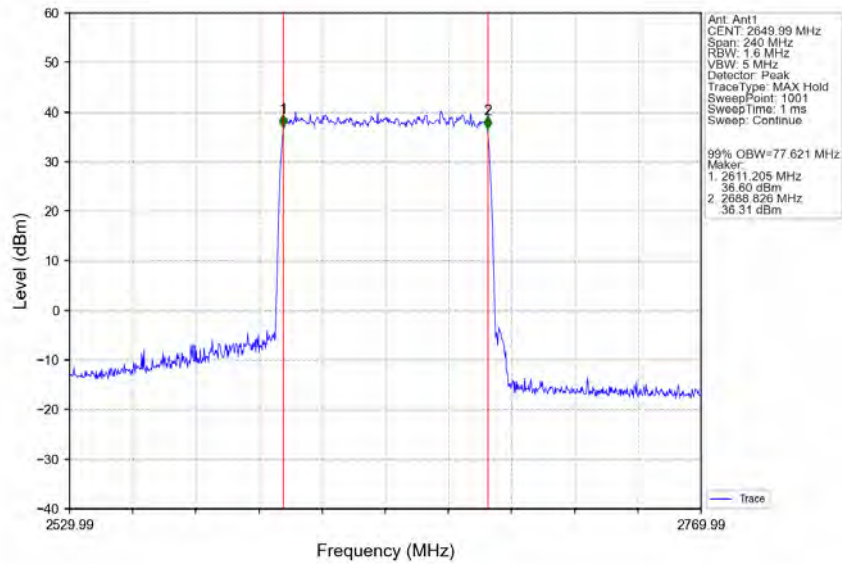


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2649.99MHz_Ant1

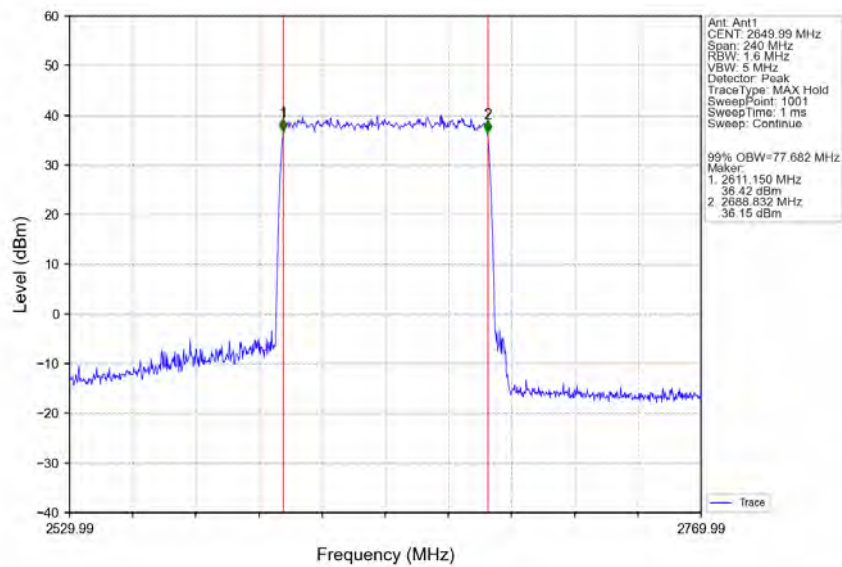


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2546.01MHz_Ant1

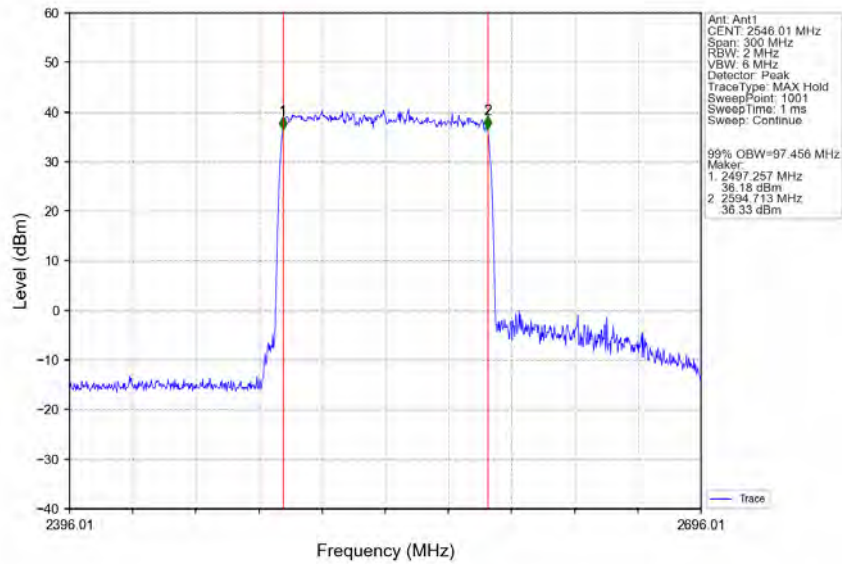


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2546.01MHz_Ant1

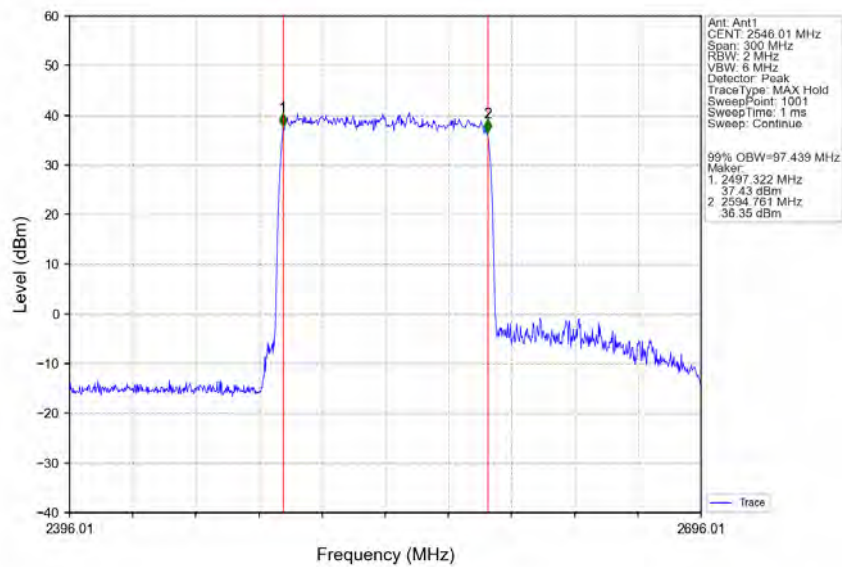


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2592.99MHz_Ant1

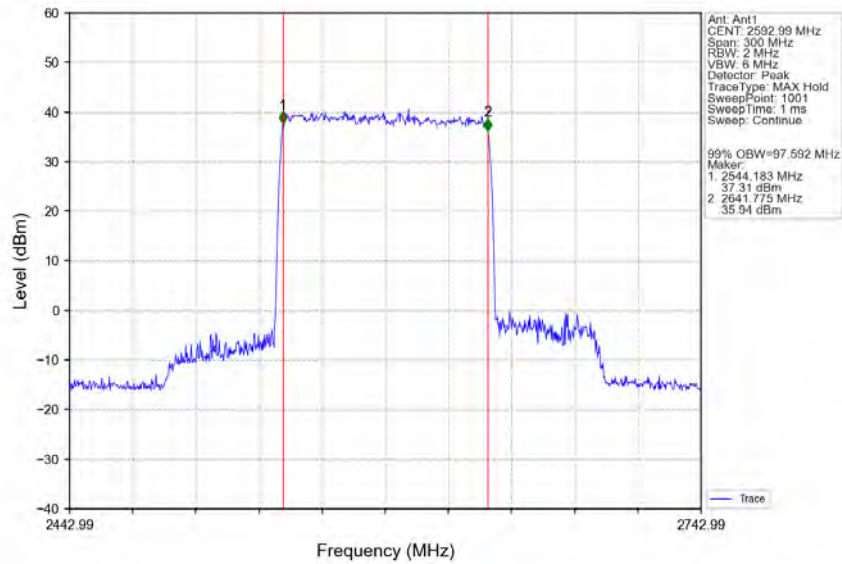


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2592.99MHz_Ant1

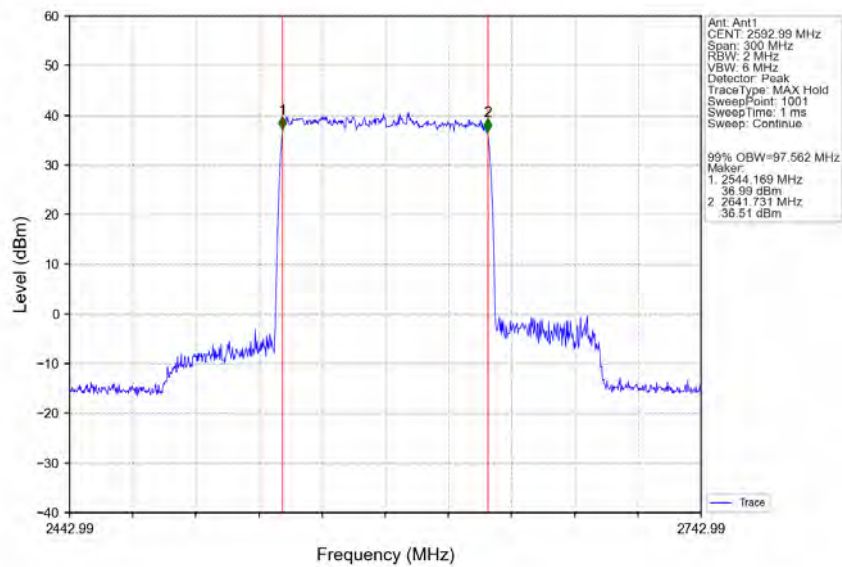

n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2640MHz_Ant1

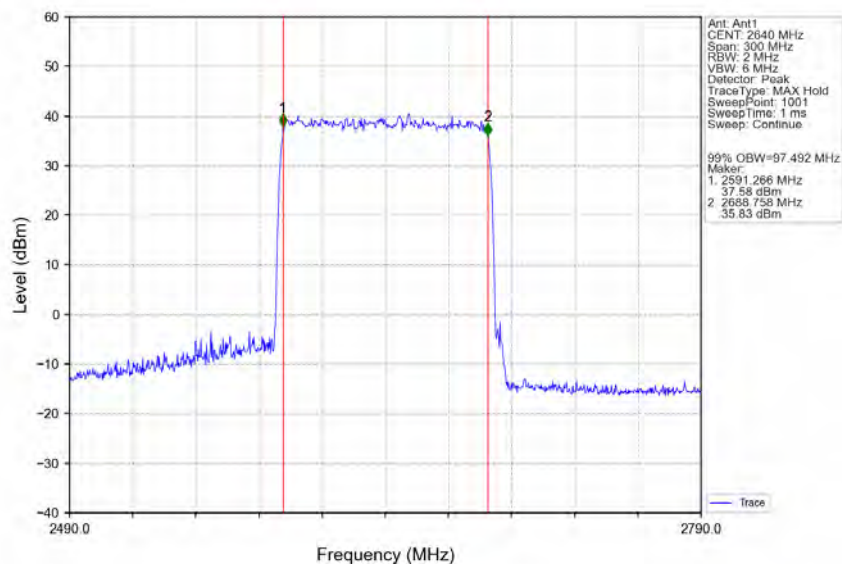


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2640MHz_Ant1

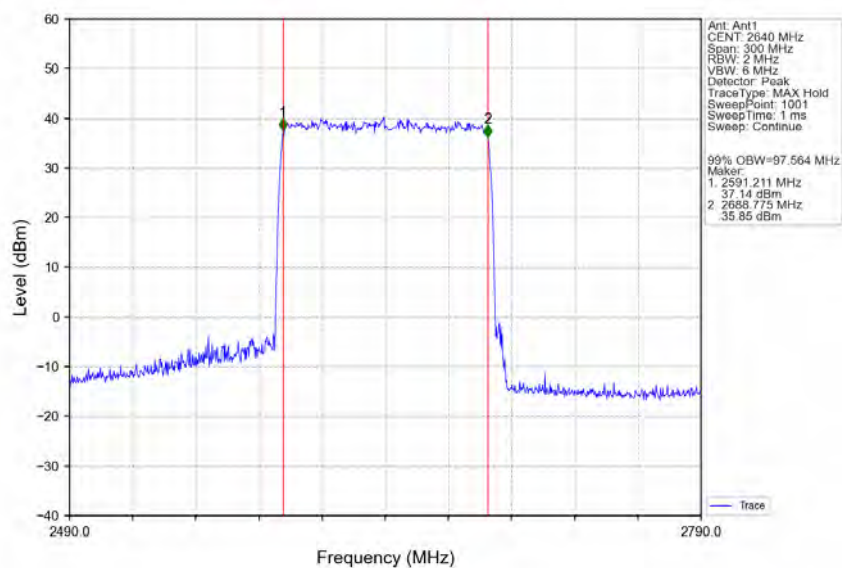


3.2.2 30_Single_XDB


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

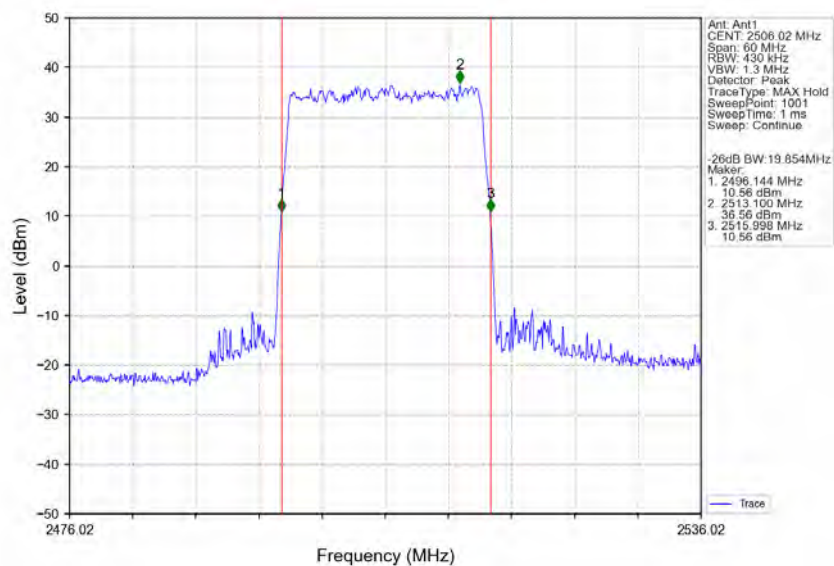


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

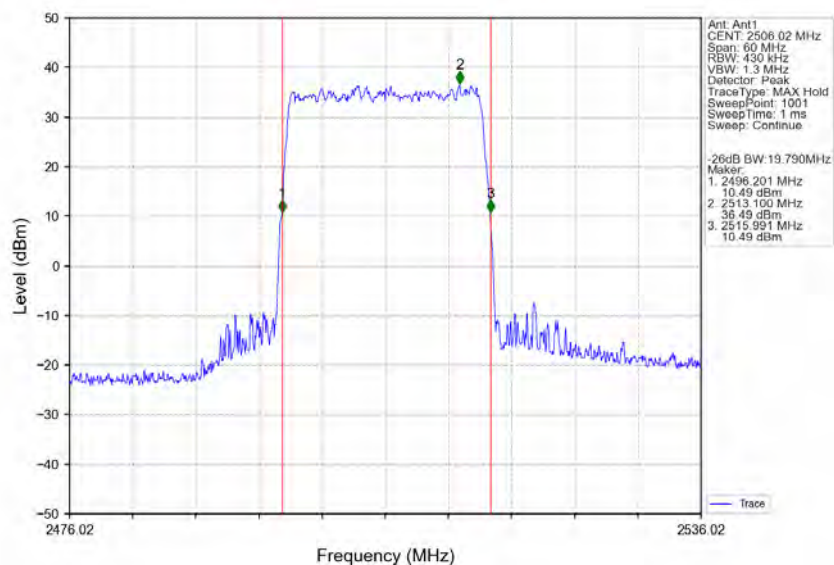


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

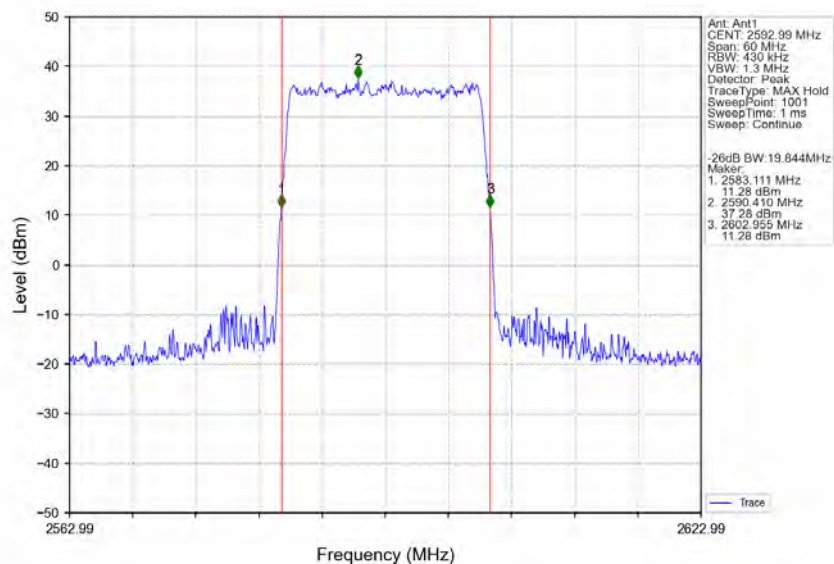


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

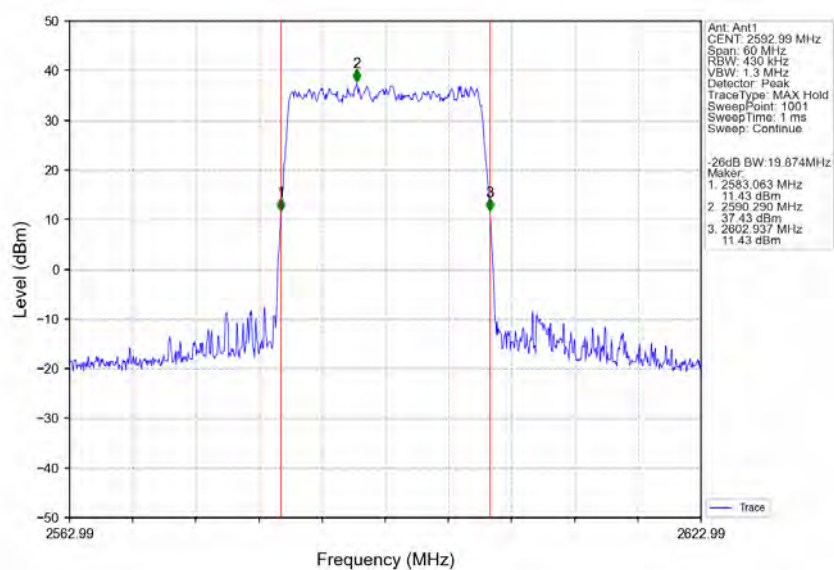


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

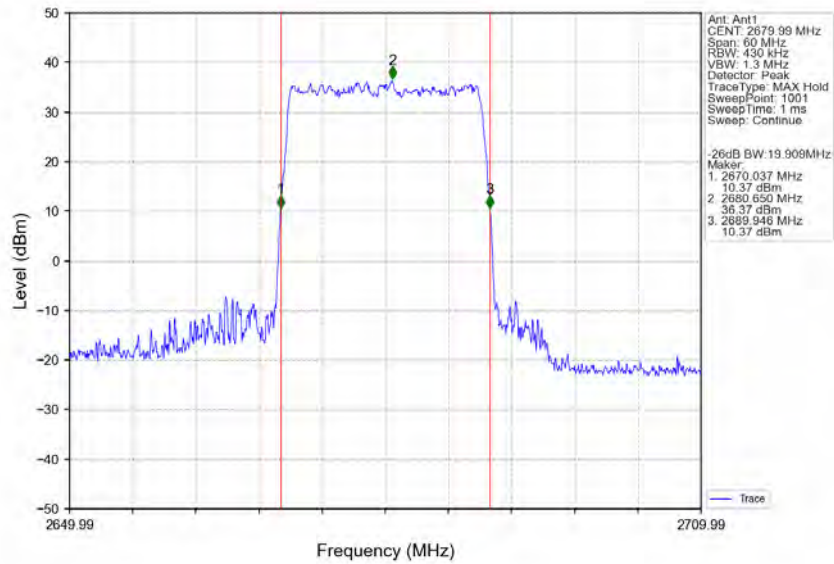


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

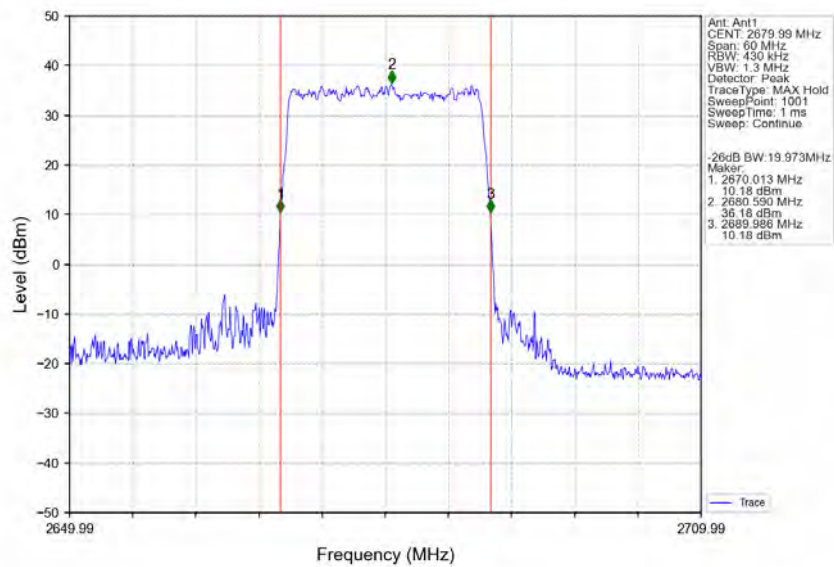


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

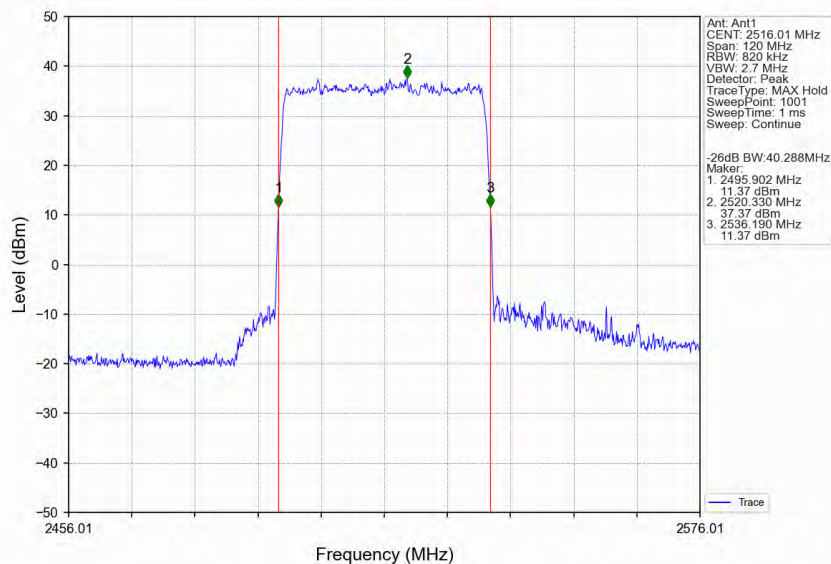


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

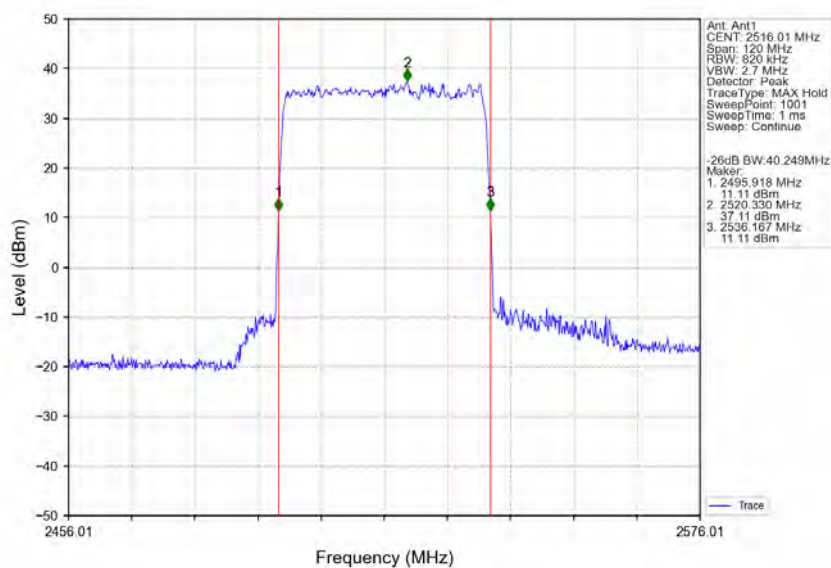


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2592.99MHz_Ant1

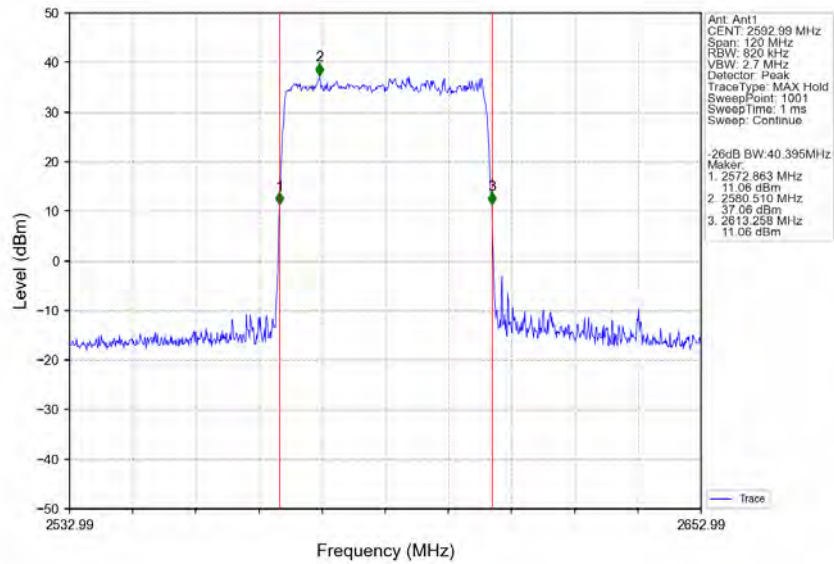


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2592.99MHz_Ant1

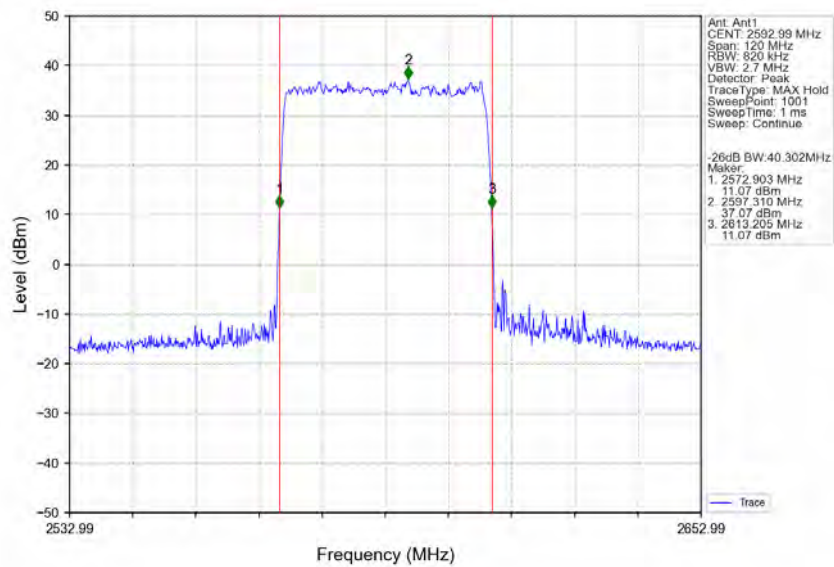


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2670MHz_Ant1

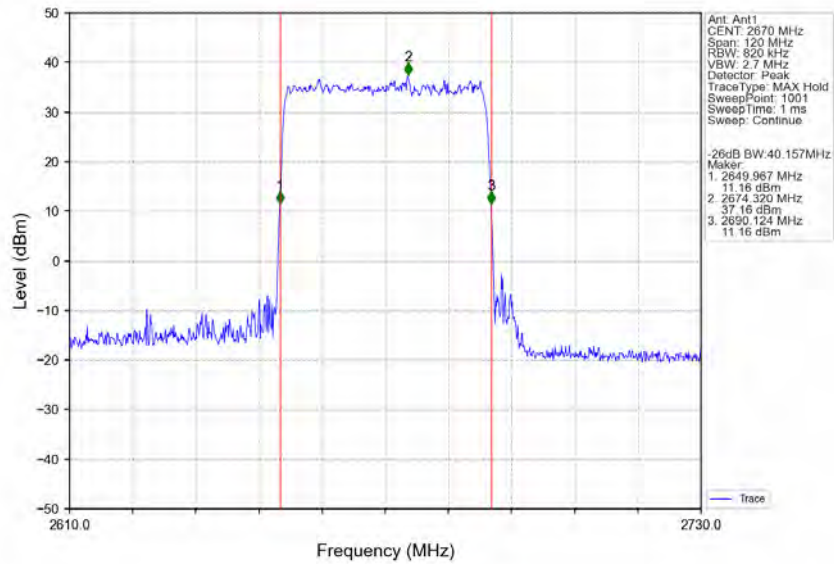


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2670MHz_Ant1

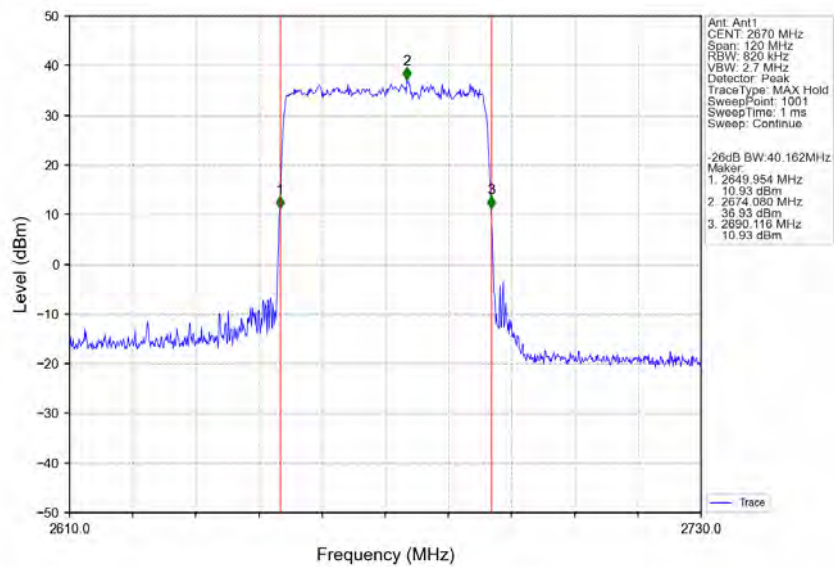


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2521.02MHz_Ant1

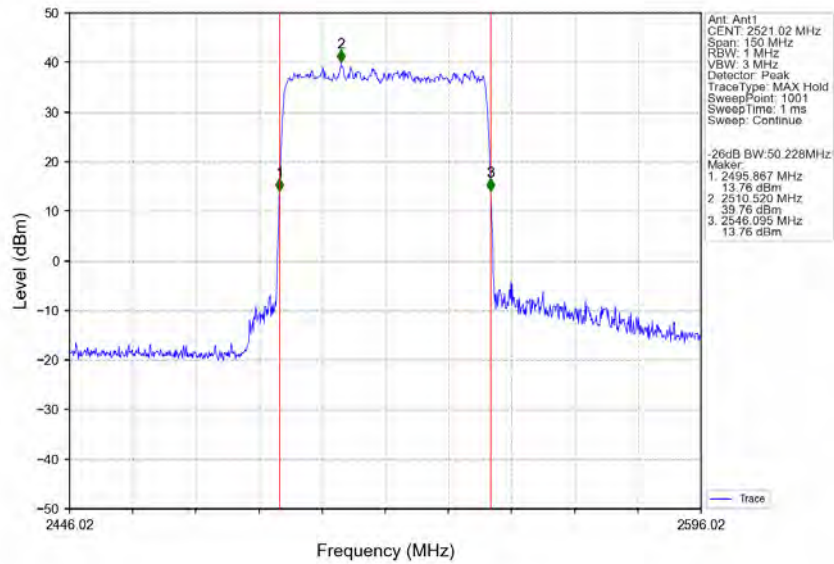


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2521.02MHz_Ant1

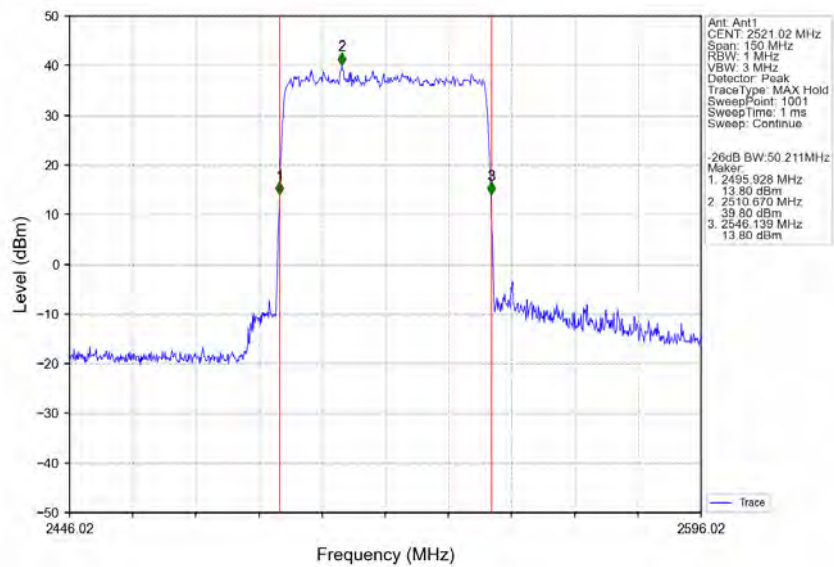


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2592.99MHz_Ant1

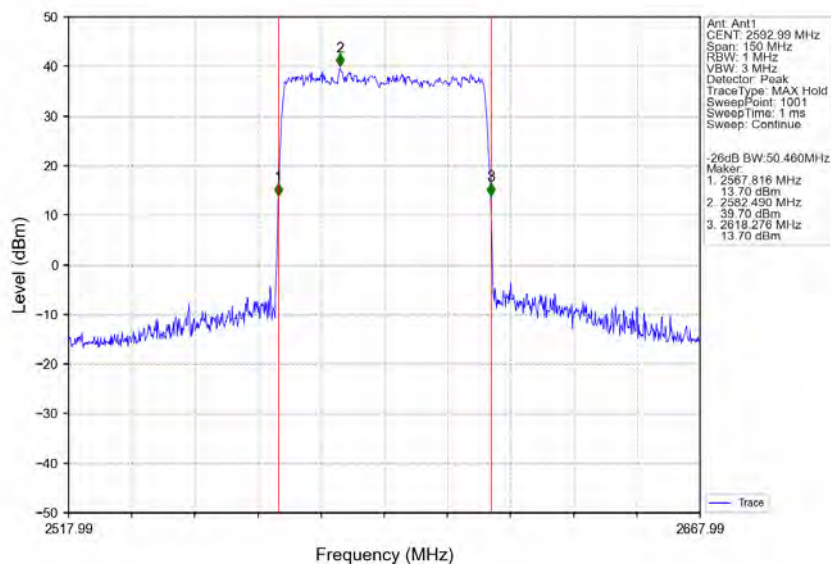


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2592.99MHz_Ant1

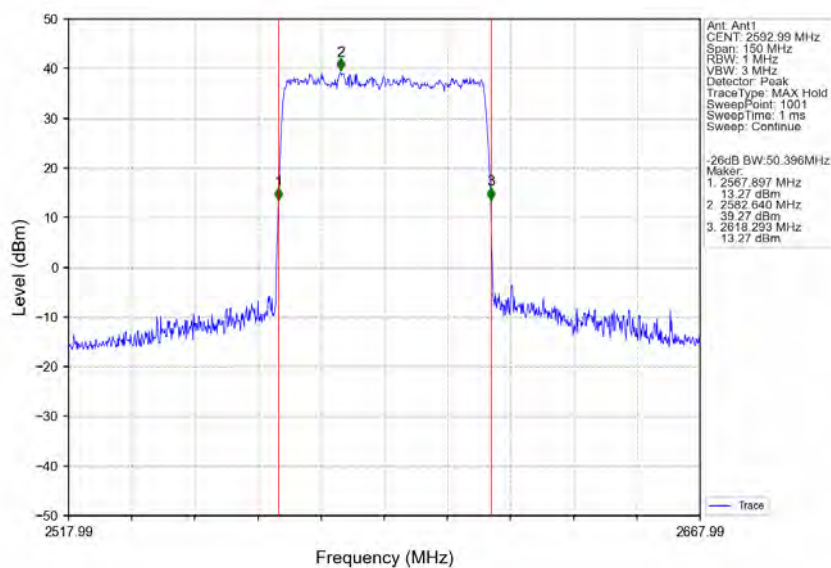


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2664.99MHz_Ant1

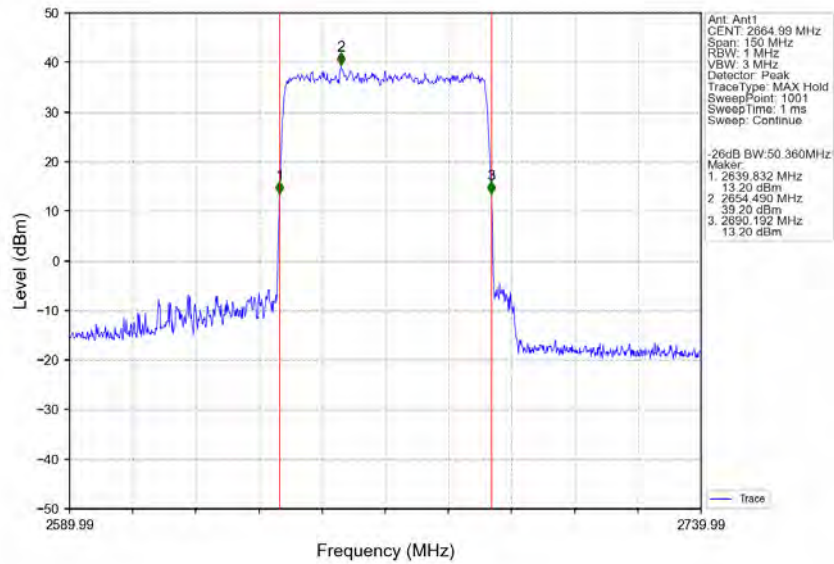


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2664.99MHz_Ant1

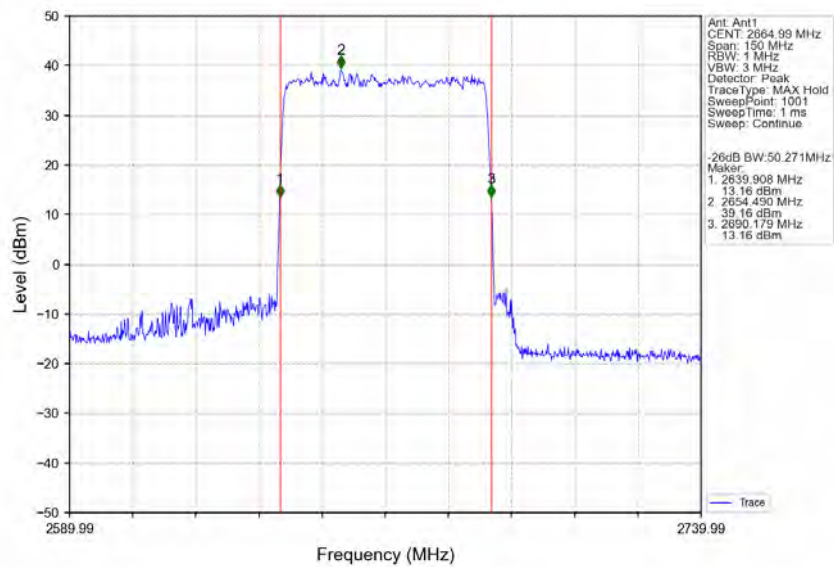


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2526MHz_Ant1

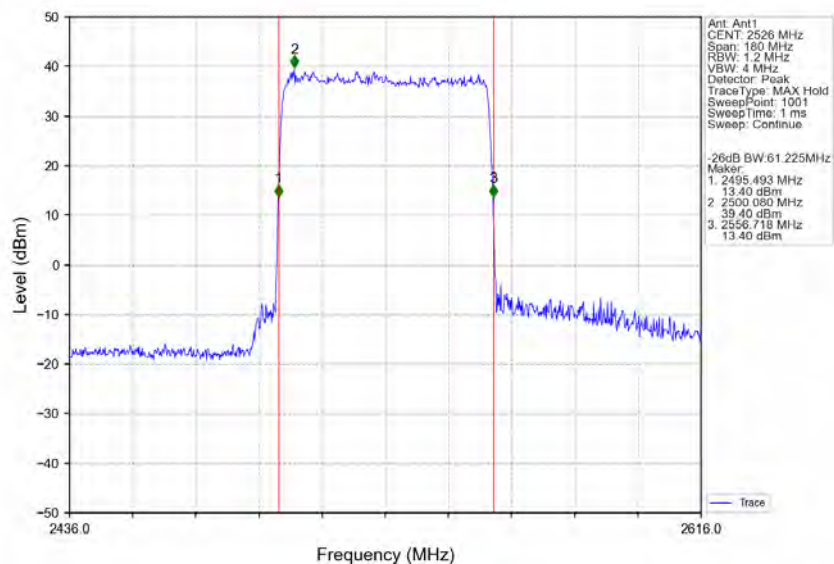


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2526MHz_Ant1

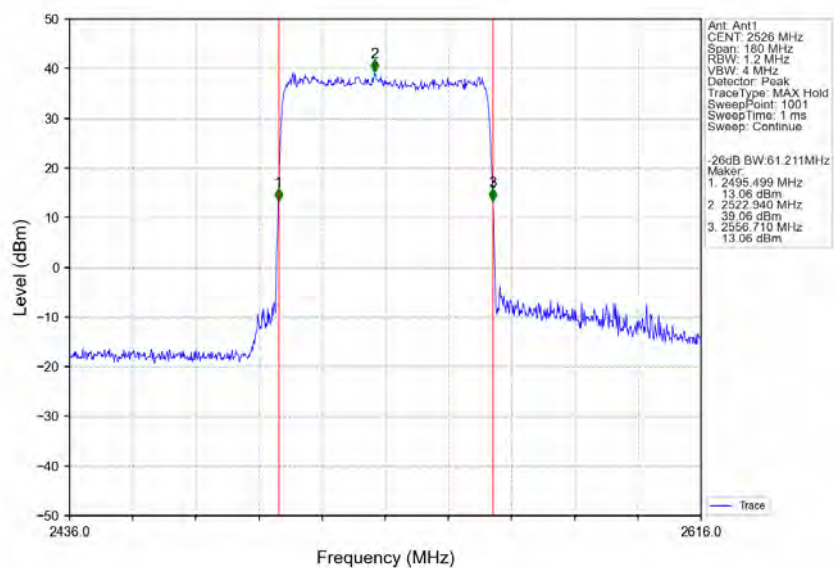


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2592.99MHz_Ant1

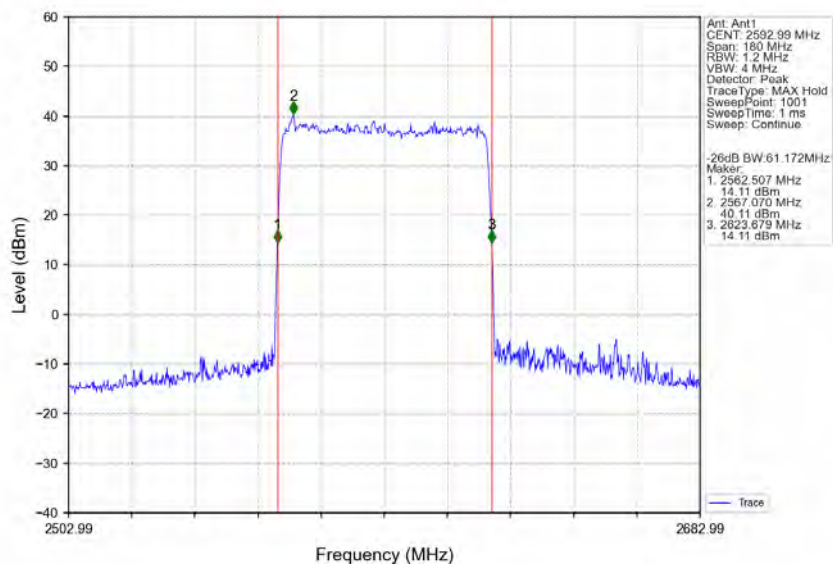


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2592.99MHz_Ant1

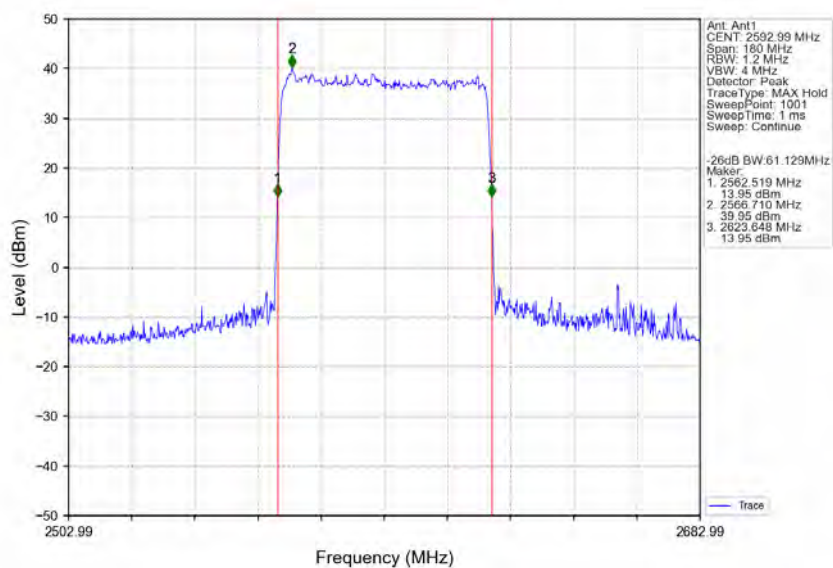


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2659.98MHz_Ant1

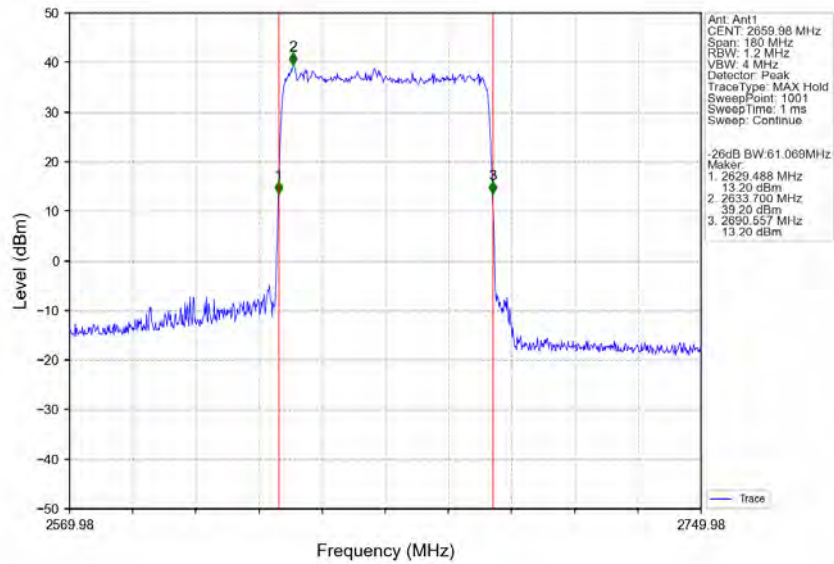


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2659.98MHz_Ant1

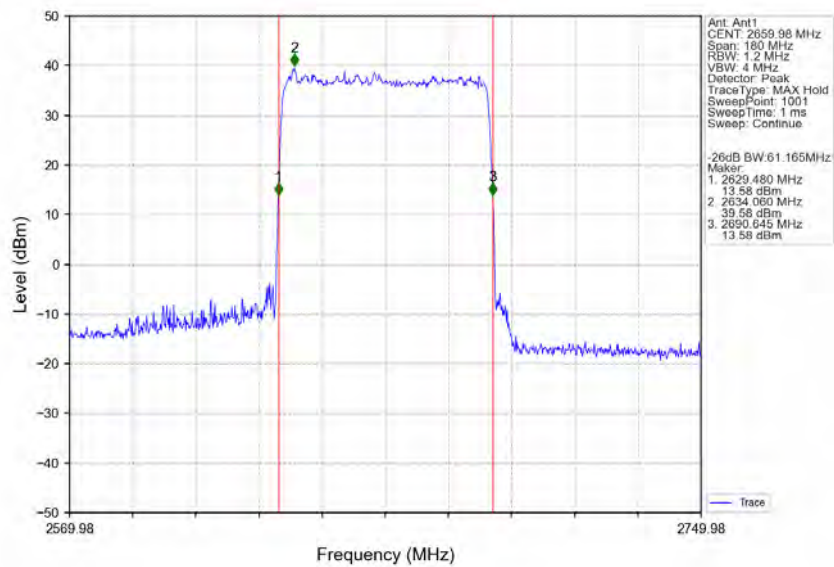


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2536.02MHz_Ant1

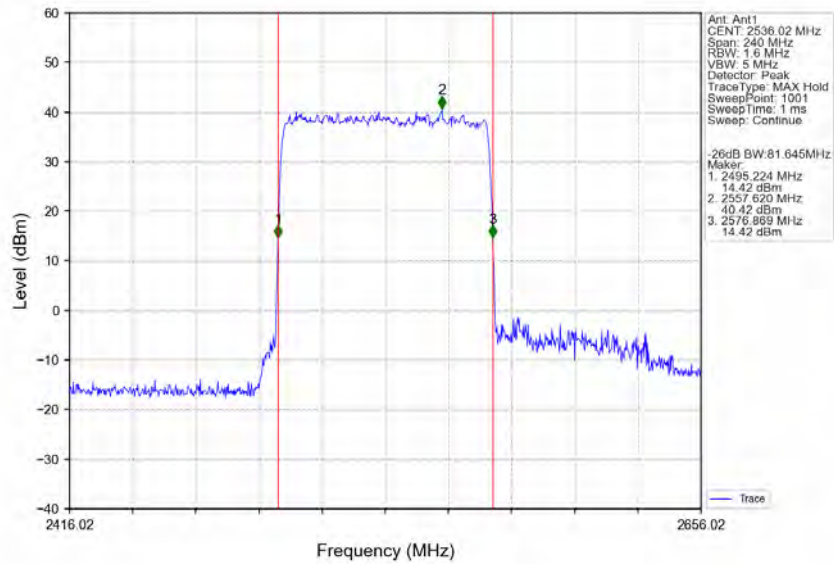


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2536.02MHz_Ant1

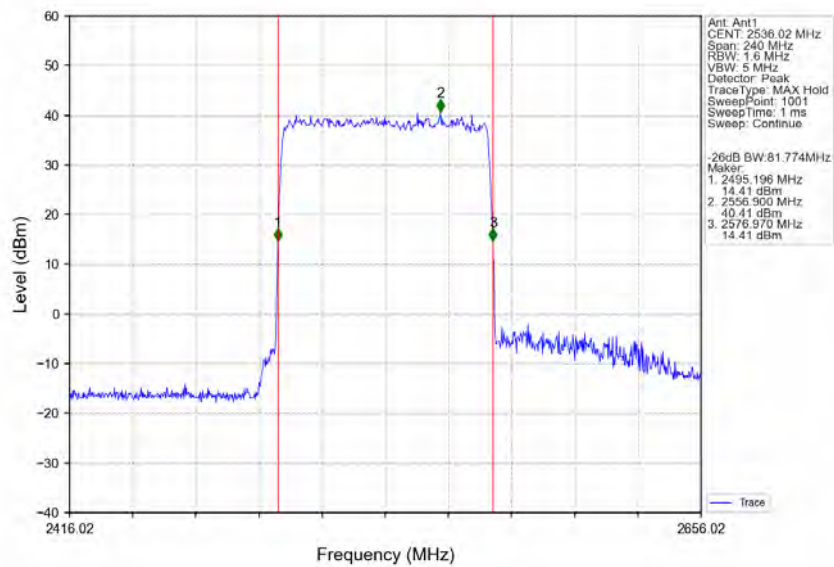


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2592.99MHz_Ant1

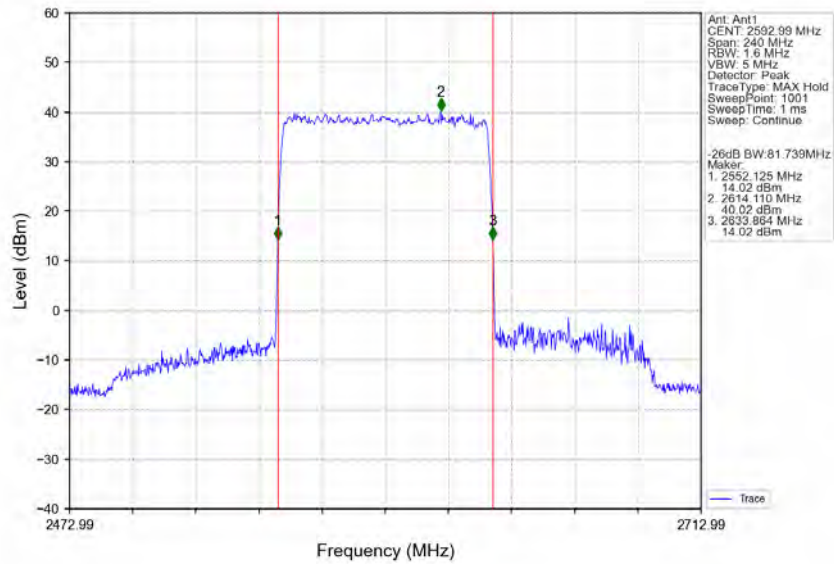


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2592.99MHz_Ant1

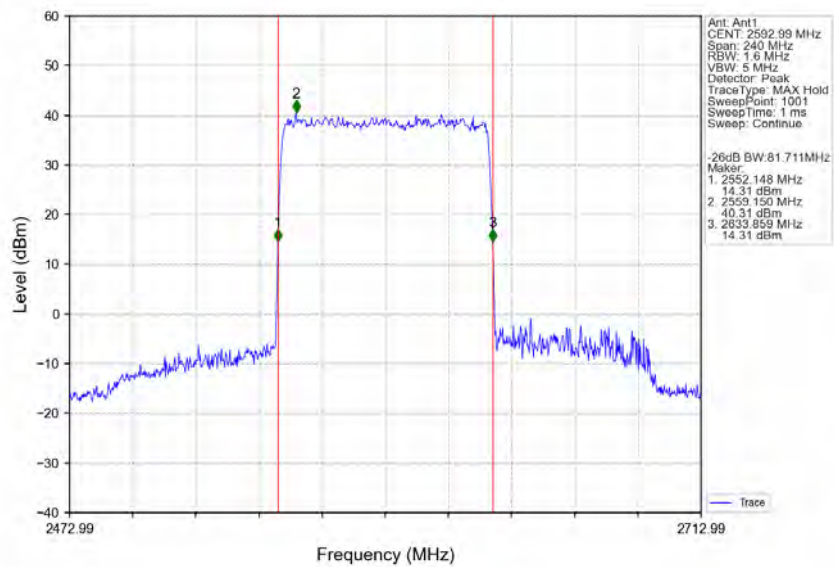


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2649.99MHz_Ant1

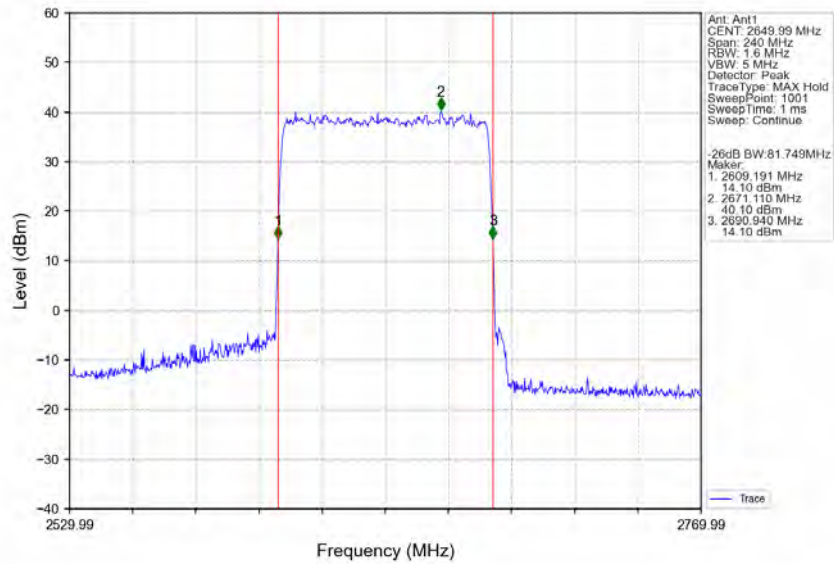


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2649.99MHz_Ant1

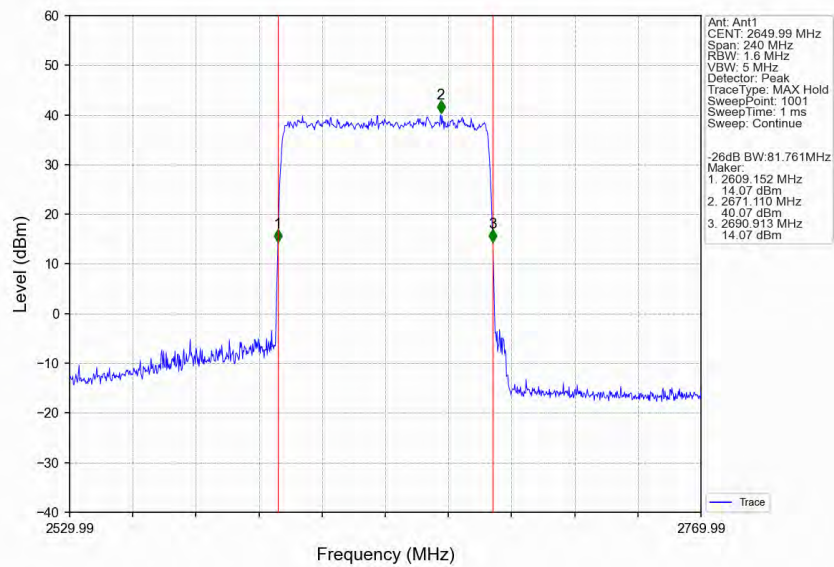


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2546.01MHz_Ant1

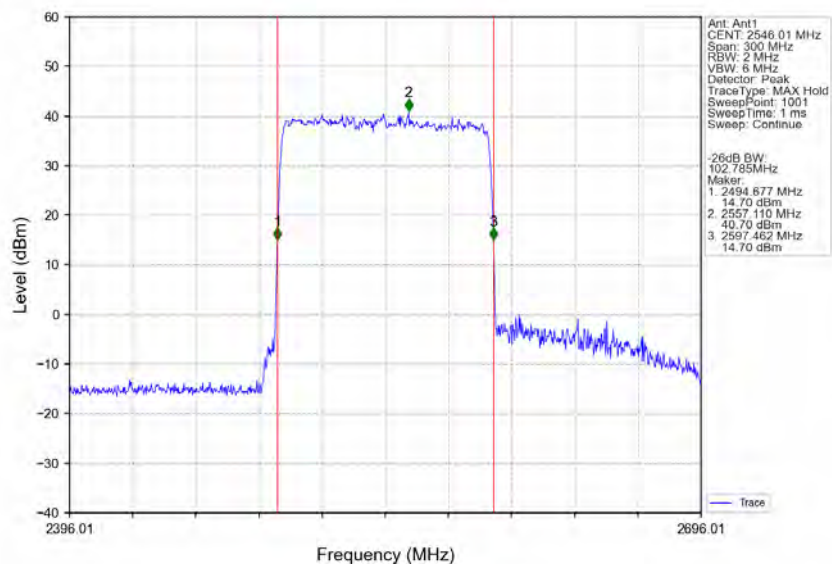


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2546.01MHz_Ant1

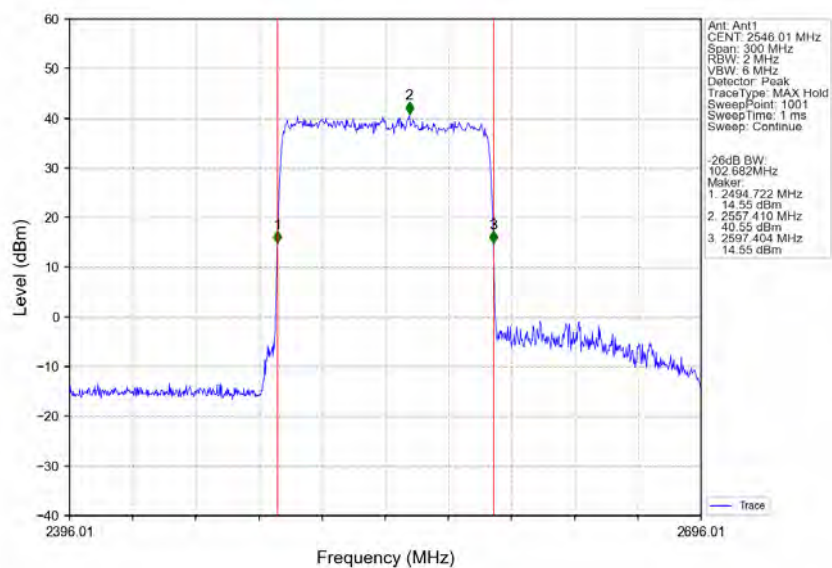


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2592.99MHz_Ant1

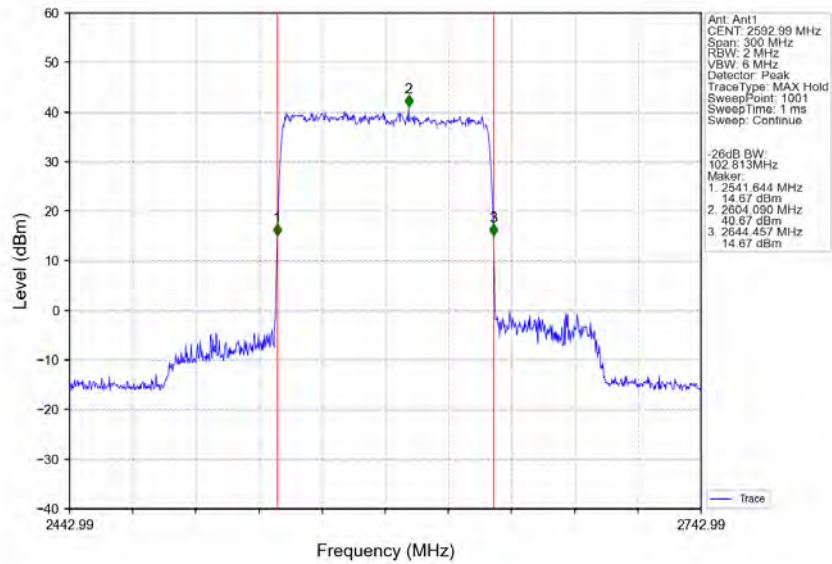


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2592.99MHz_Ant1

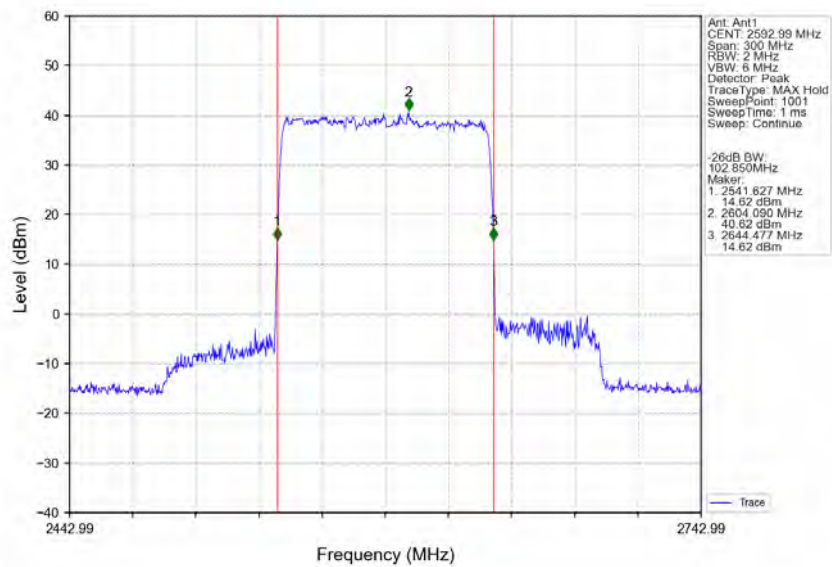

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_QPSK_CC1:2640MHz_Ant1

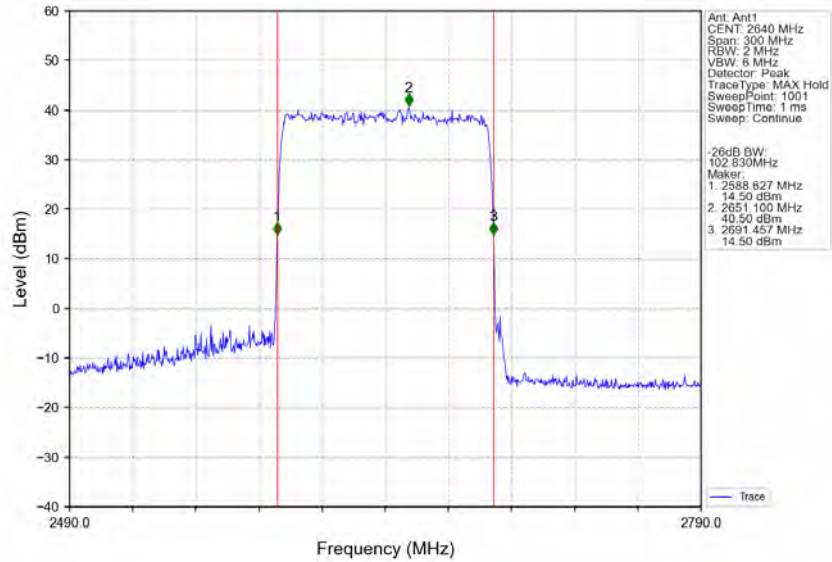

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_256QAM_CC1:2640MHz_Ant1

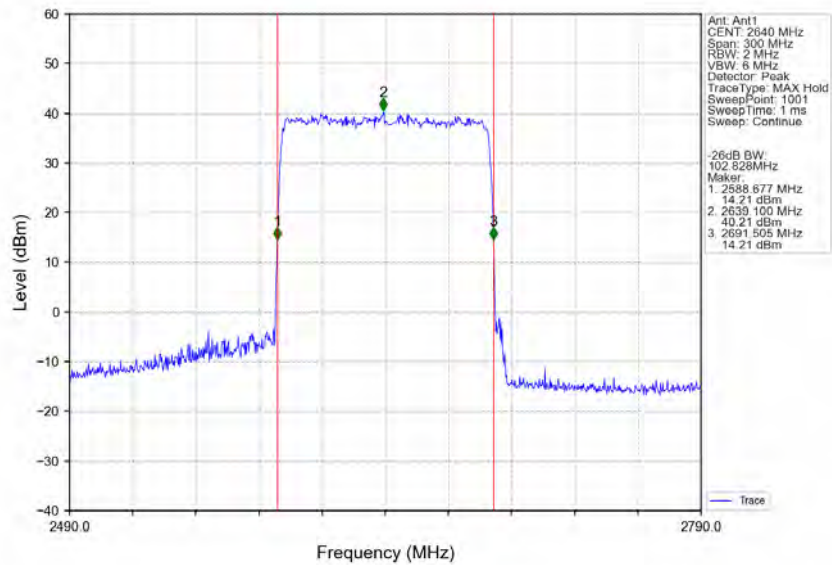

4. Peak-Average Ratio


4.1 Test Result

4.1.1 30_Single


Band n41 Single NTV Ant1						
BW (MHz)	DL Frequency (MHz)	Test Mode	Ant No.	Peak-Average Ratio (dB)		Verdict
				Result	Limit	
CC1:20	CC1:2506.02	QPSK	1	9.10	<=13	Pass
		256QAM	1	9.21	<=13	Pass
	CC1:2592.99	QPSK	1	9.14	<=13	Pass
		256QAM	1	9.26	<=13	Pass
	CC1:2679.99	QPSK	1	9.24	<=13	Pass
		256QAM	1	9.28	<=13	Pass
CC1:40	CC1:2516.01	QPSK	1	9.33	<=13	Pass
		256QAM	1	9.42	<=13	Pass
	CC1:2592.99	QPSK	1	9.38	<=13	Pass
		256QAM	1	9.24	<=13	Pass
	CC1:2670	QPSK	1	9.15	<=13	Pass
		256QAM	1	9.14	<=13	Pass
CC1:50	CC1:2521.02	QPSK	1	9.55	<=13	Pass
		256QAM	1	9.47	<=13	Pass
	CC1:2592.99	QPSK	1	9.36	<=13	Pass
		256QAM	1	9.46	<=13	Pass
	CC1:2664.99	QPSK	1	9.46	<=13	Pass
		256QAM	1	9.30	<=13	Pass
CC1:60	CC1:2526	QPSK	1	9.62	<=13	Pass
		256QAM	1	9.68	<=13	Pass
	CC1:2592.99	QPSK	1	9.61	<=13	Pass
		256QAM	1	9.54	<=13	Pass
	CC1:2659.98	QPSK	1	9.76	<=13	Pass
		256QAM	1	9.70	<=13	Pass
CC1:80	CC1:2536.02	QPSK	1	9.52	<=13	Pass
		256QAM	1	9.50	<=13	Pass
	CC1:2592.99	QPSK	1	9.48	<=13	Pass
		256QAM	1	9.30	<=13	Pass
	CC1:2649.99	QPSK	1	9.64	<=13	Pass
		256QAM	1	9.47	<=13	Pass
CC1:100	CC1:2546.01	QPSK	1	9.42	<=13	Pass
		256QAM	1	9.47	<=13	Pass
	CC1:2592.99	QPSK	1	9.66	<=13	Pass
		256QAM	1	9.75	<=13	Pass
	CC1:2640	QPSK	1	9.65	<=13	Pass
		256QAM	1	9.33	<=13	Pass

4.2 Test Graph


4.2.1 30_Single

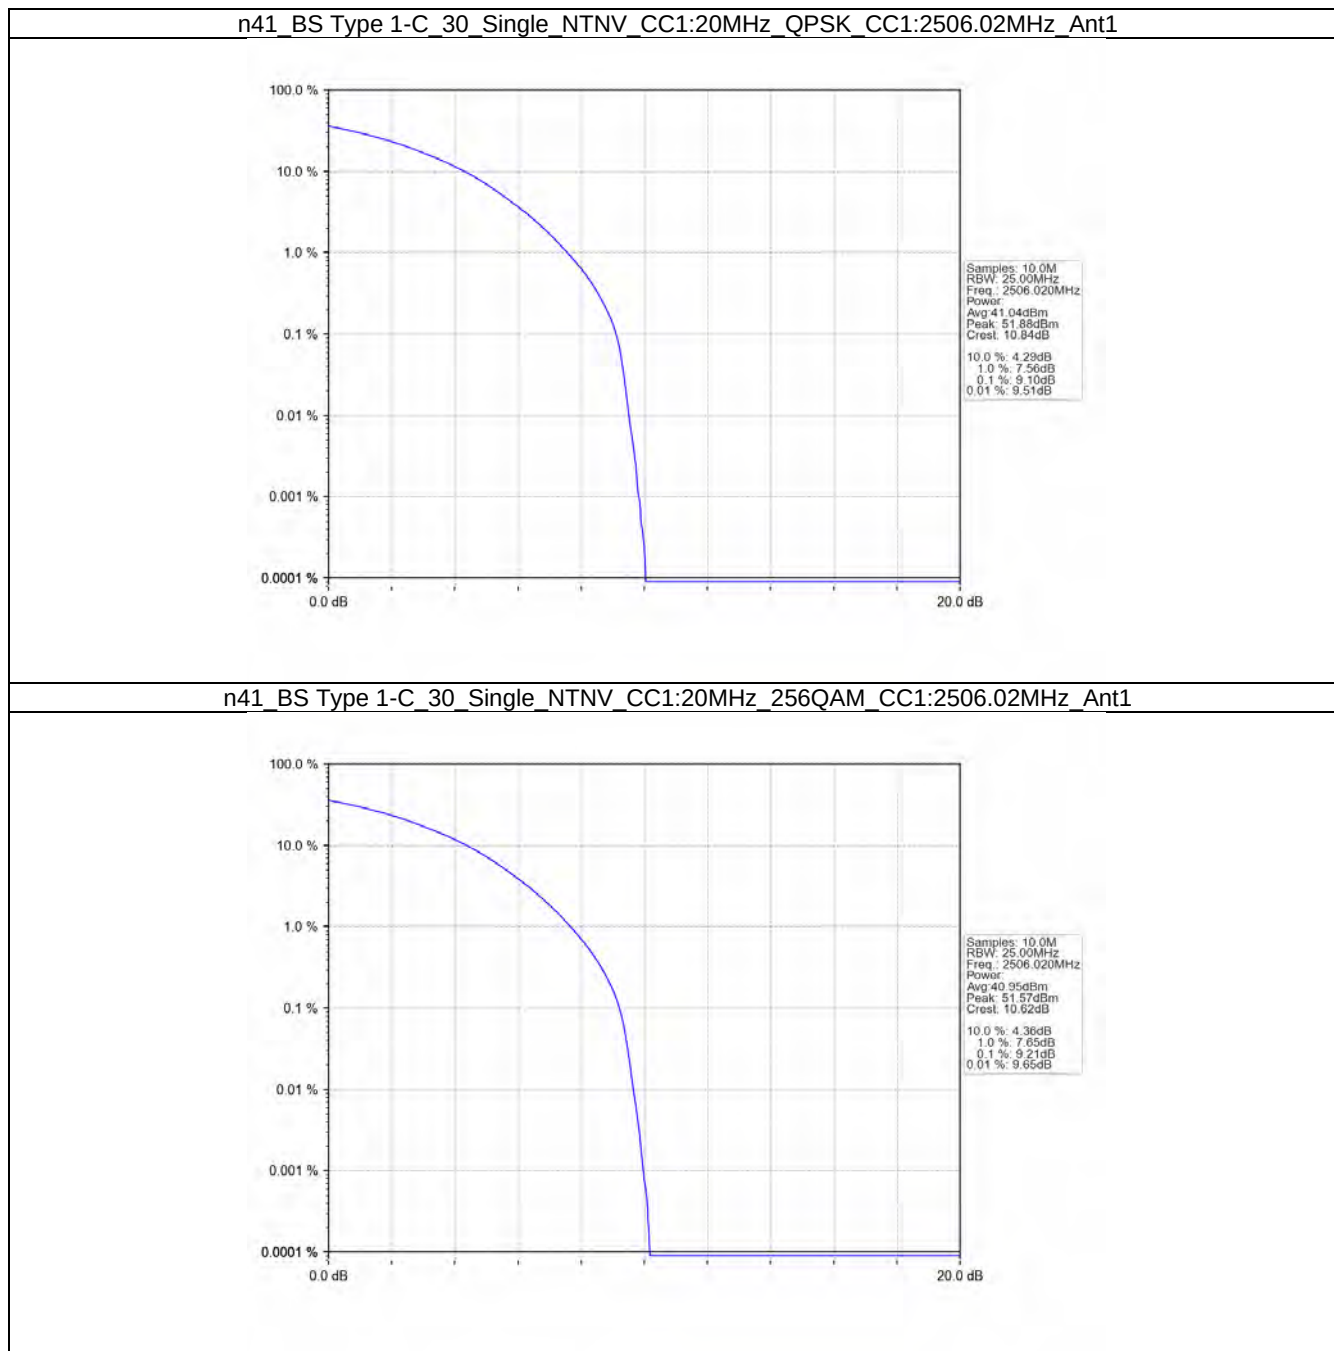


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

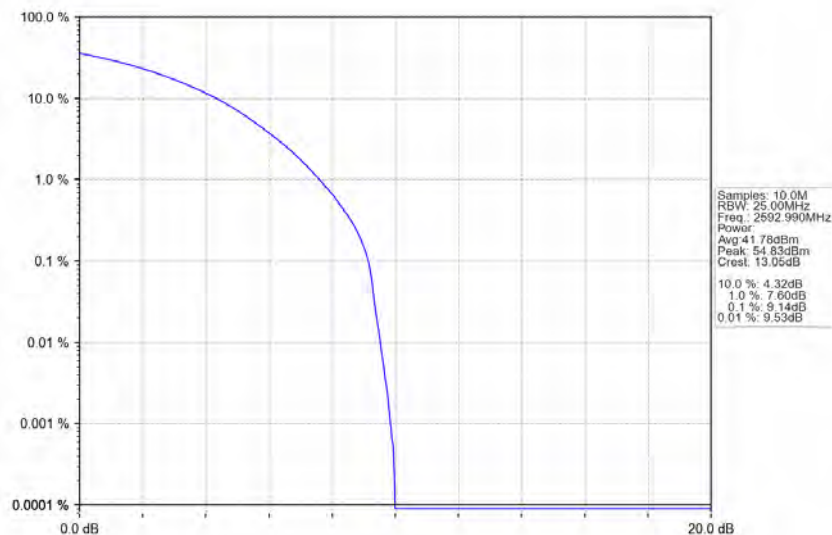


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

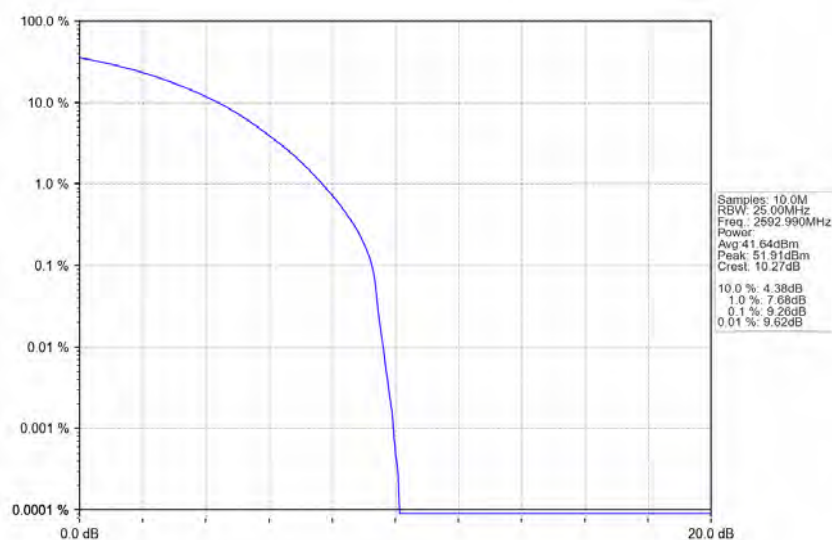


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

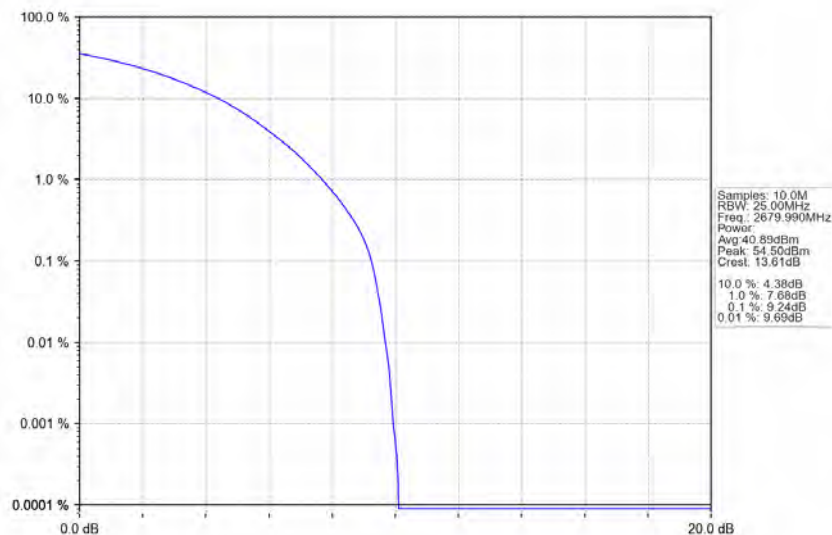


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

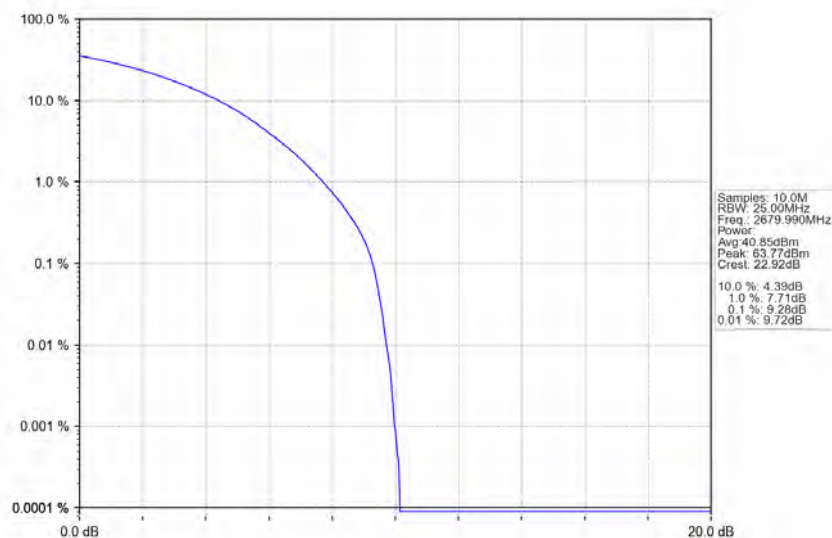


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

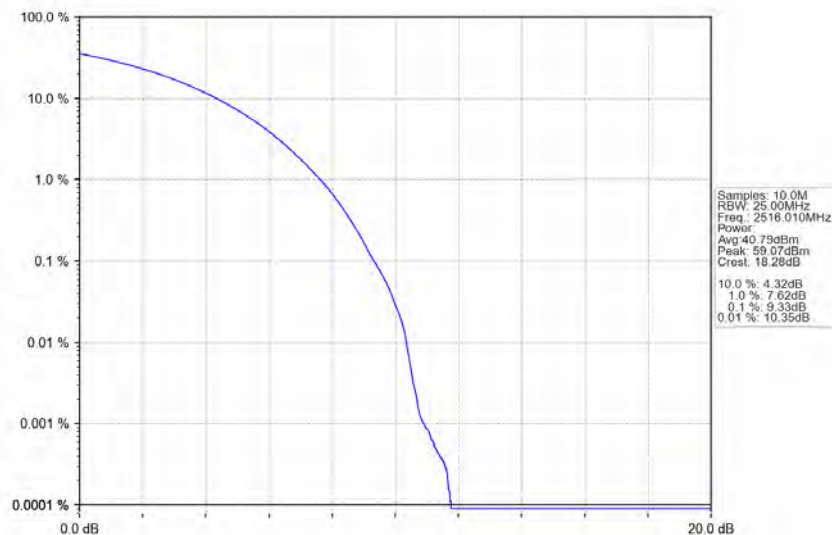


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

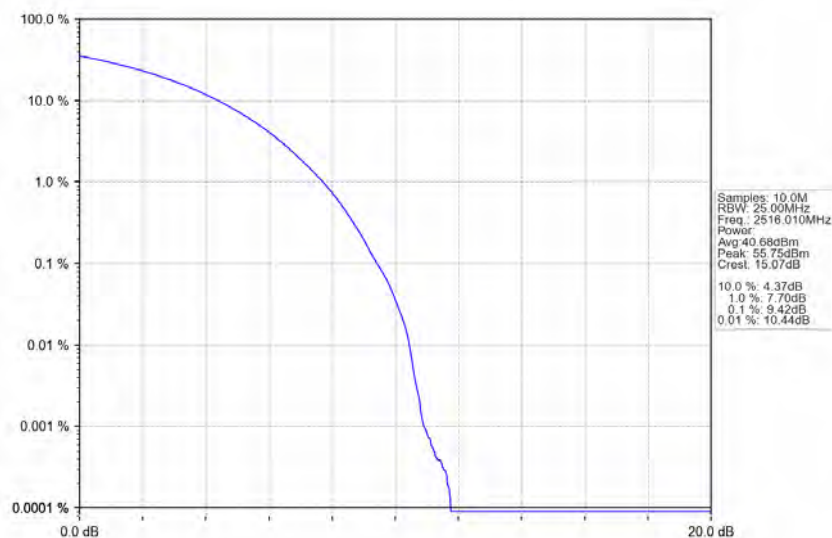


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2592.99MHz_Ant1

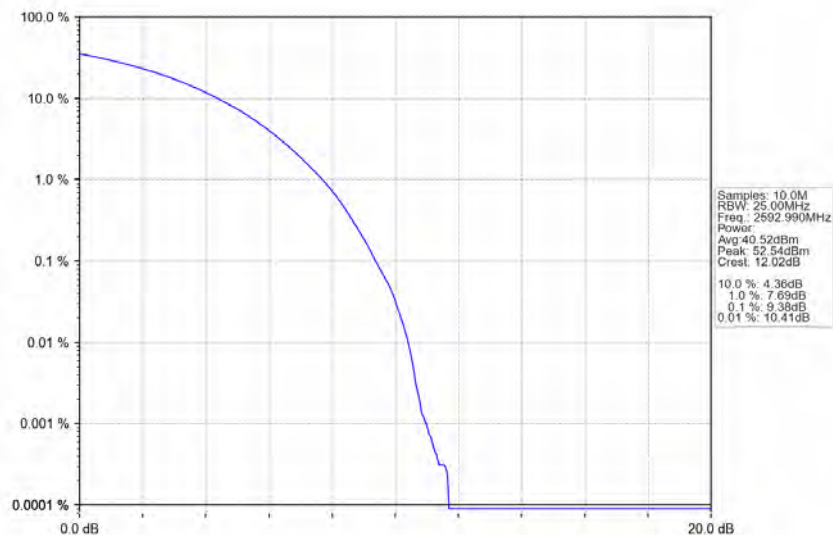


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2592.99MHz_Ant1

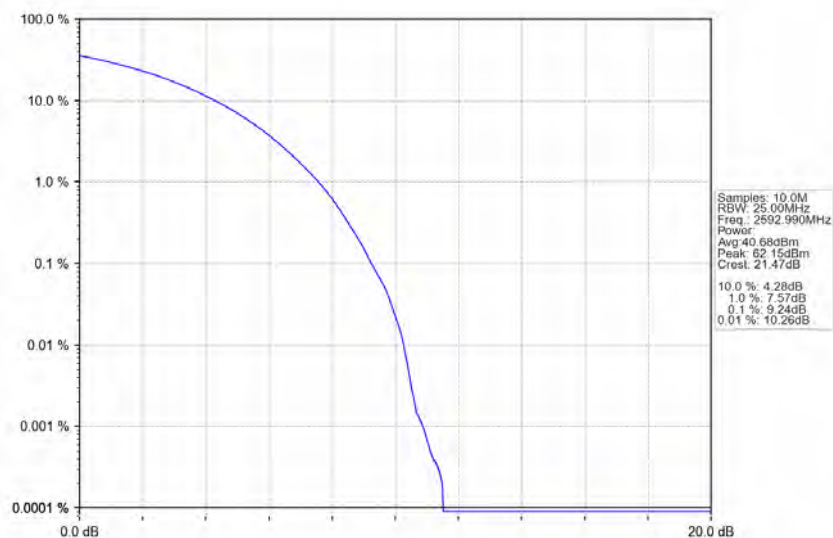


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2670MHz_Ant1

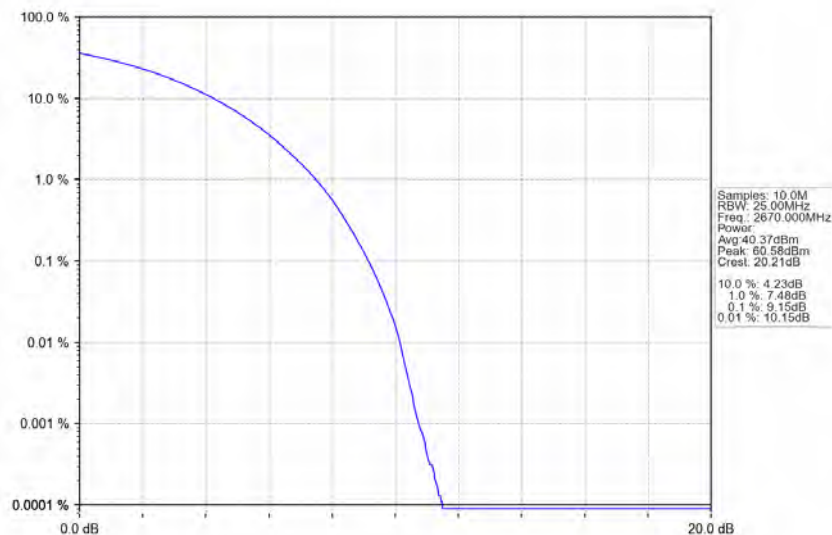


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2670MHz_Ant1

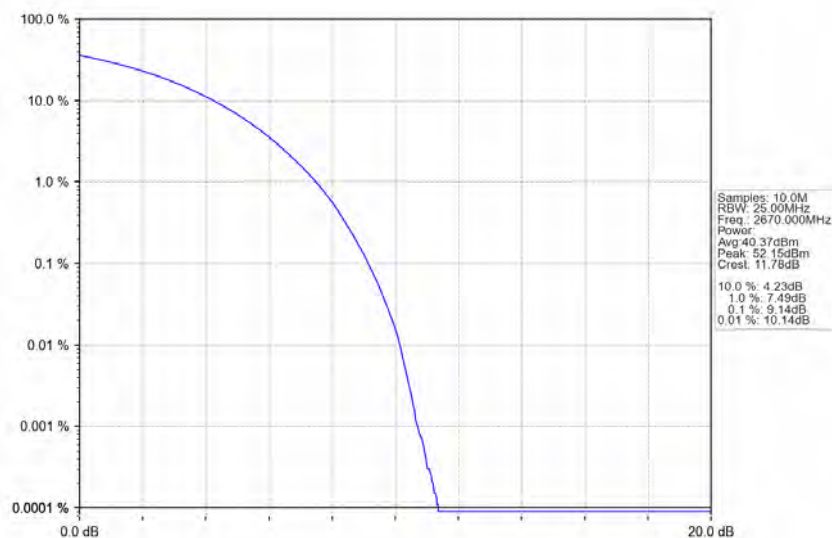


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2521.02MHz_Ant1

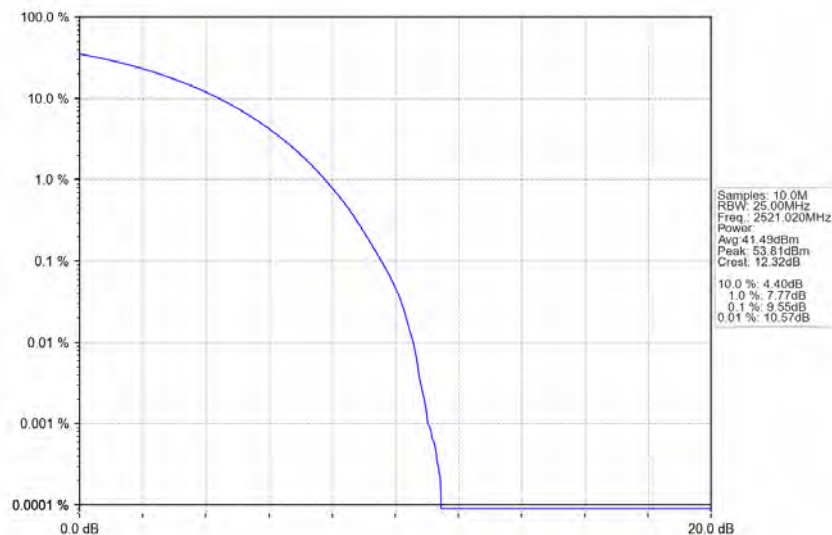


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2521.02MHz_Ant1

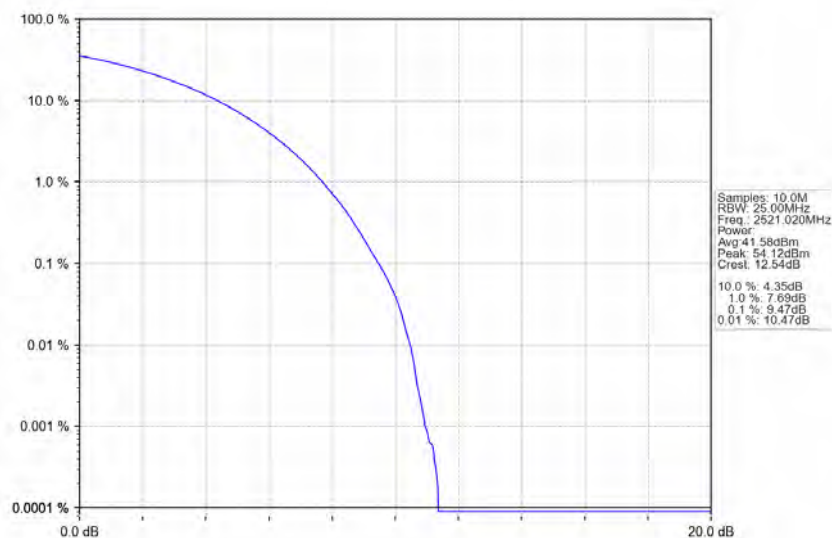


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2592.99MHz_Ant1

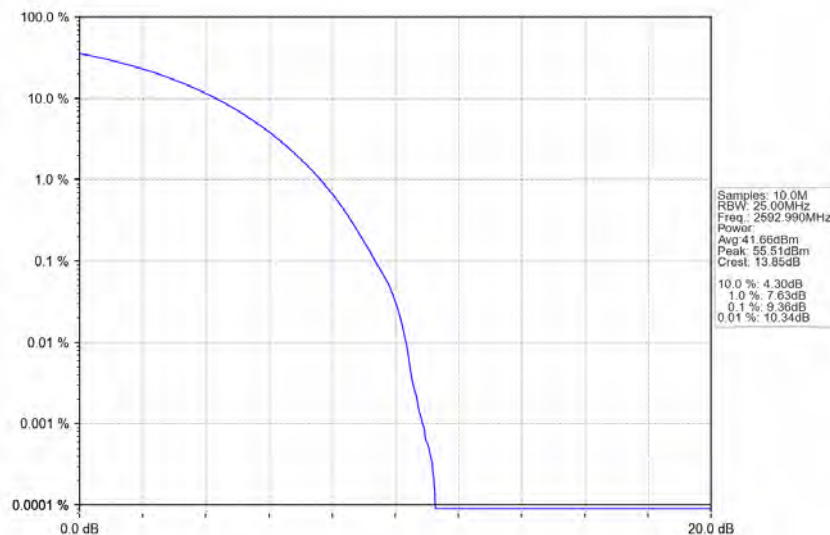


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2592.99MHz_Ant1

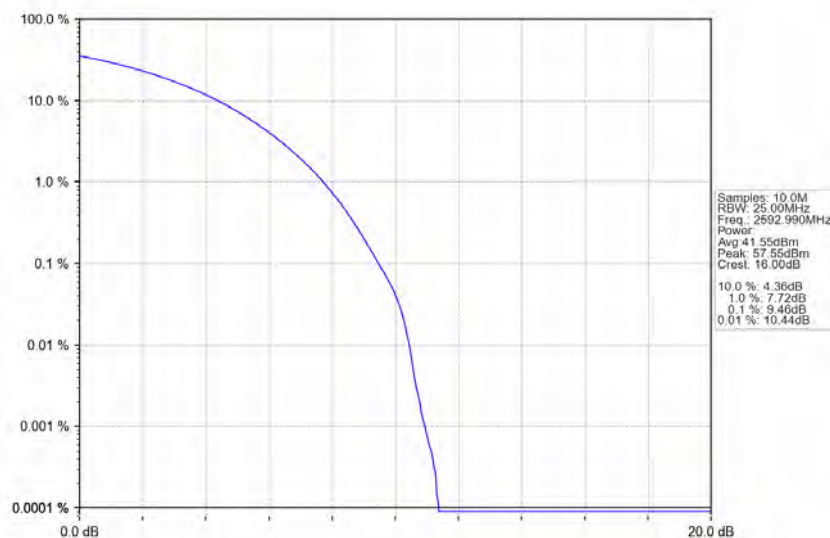


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_QPSK_CC1:2664.99MHz_Ant1

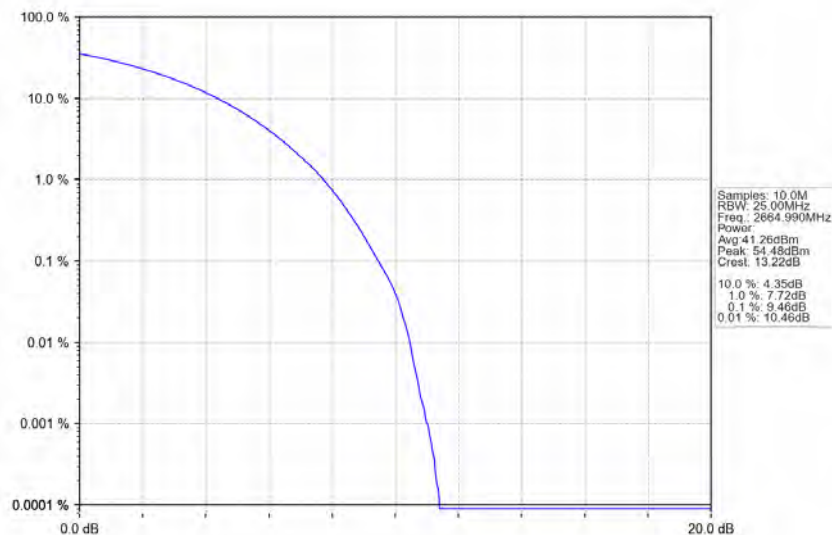


n41_BS Type 1-C_30_Single_NTNV_CC1:50MHz_256QAM_CC1:2664.99MHz_Ant1

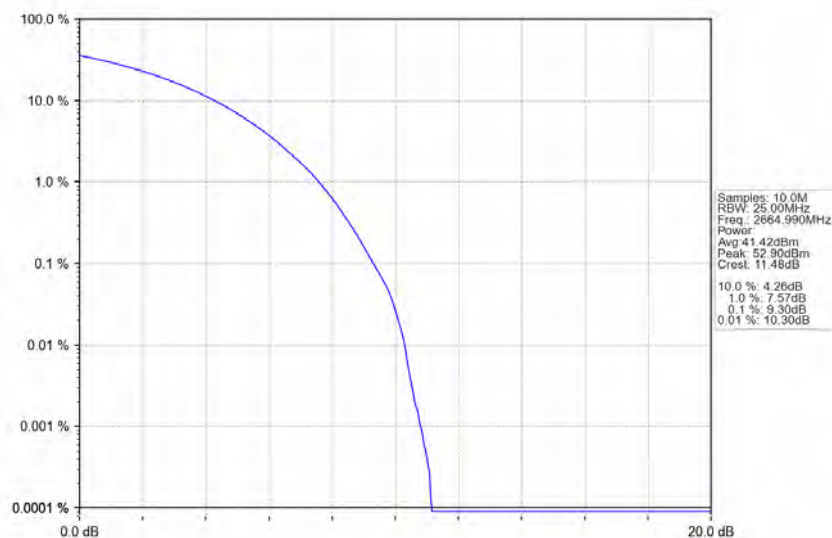


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2526MHz_Ant1

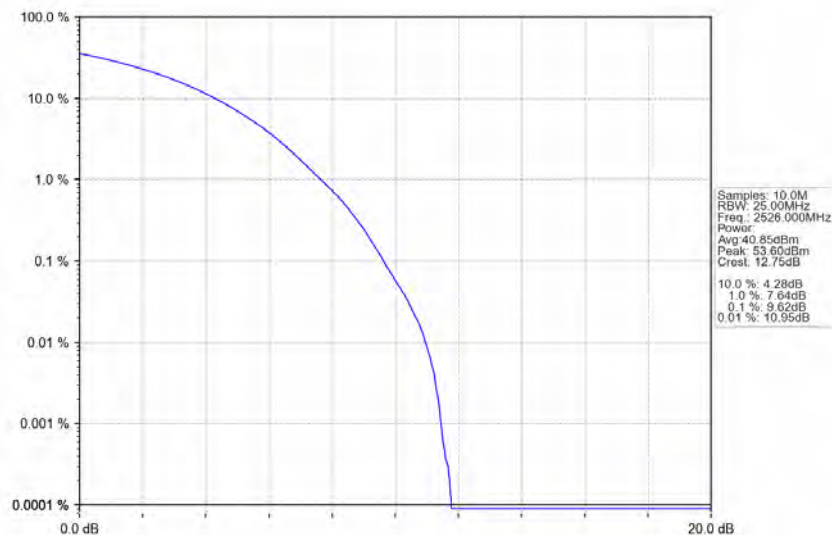


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2526MHz_Ant1

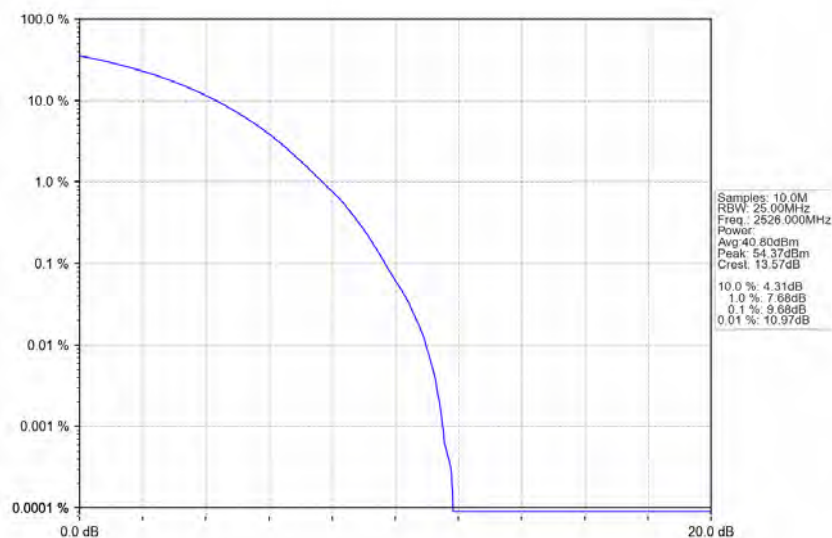


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2592.99MHz_Ant1

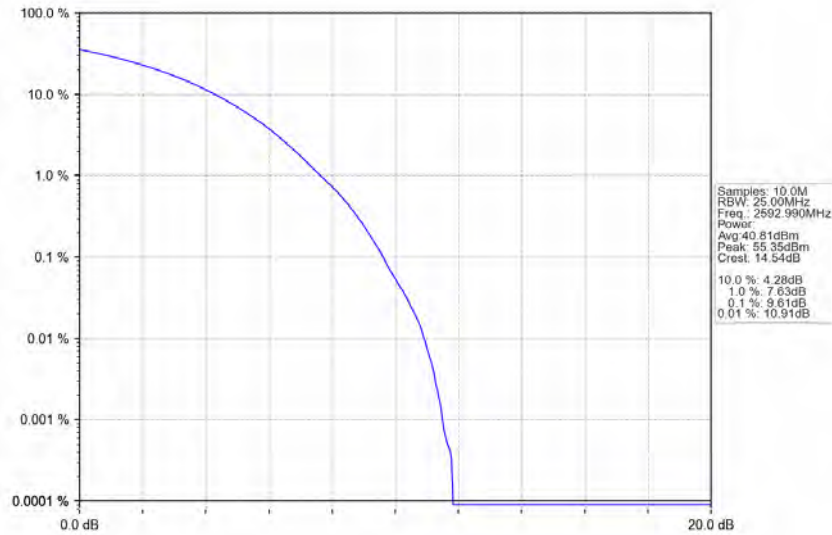


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2592.99MHz_Ant1

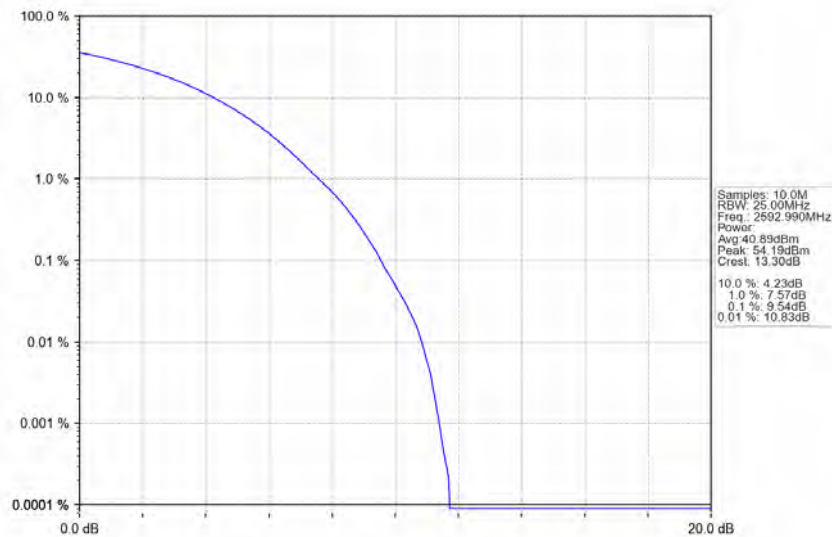


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_QPSK_CC1:2659.98MHz_Ant1

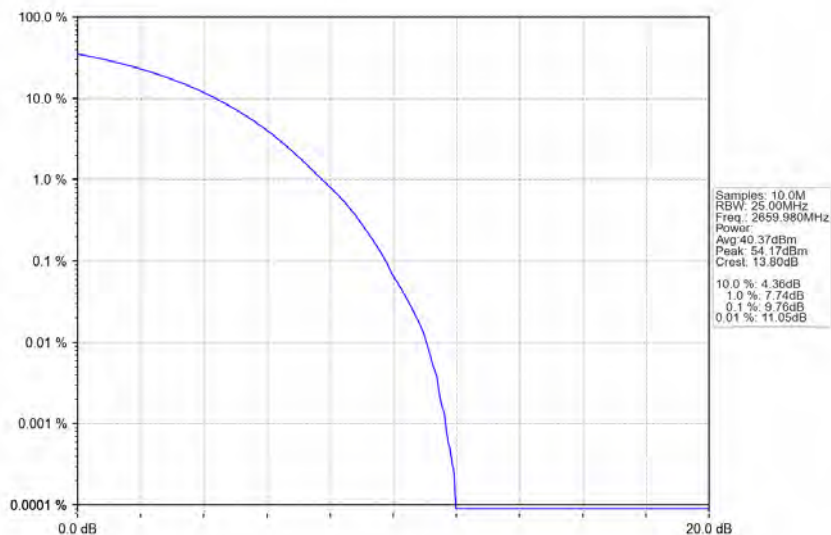


n41_BS Type 1-C_30_Single_NTNV_CC1:60MHz_256QAM_CC1:2659.98MHz_Ant1

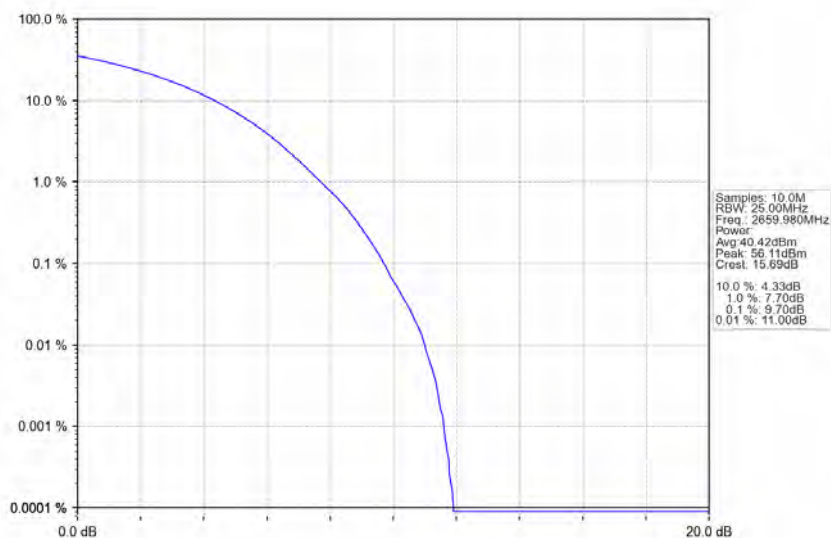


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2536.02MHz_Ant1

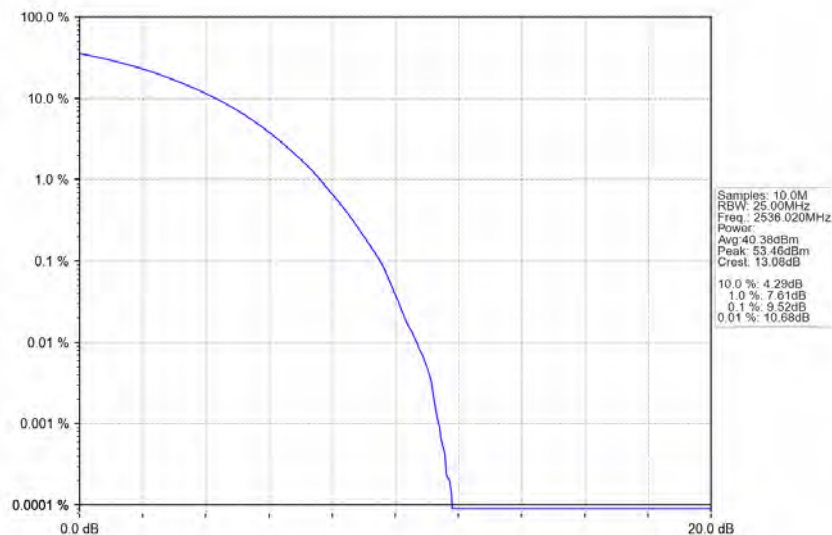


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2536.02MHz_Ant1

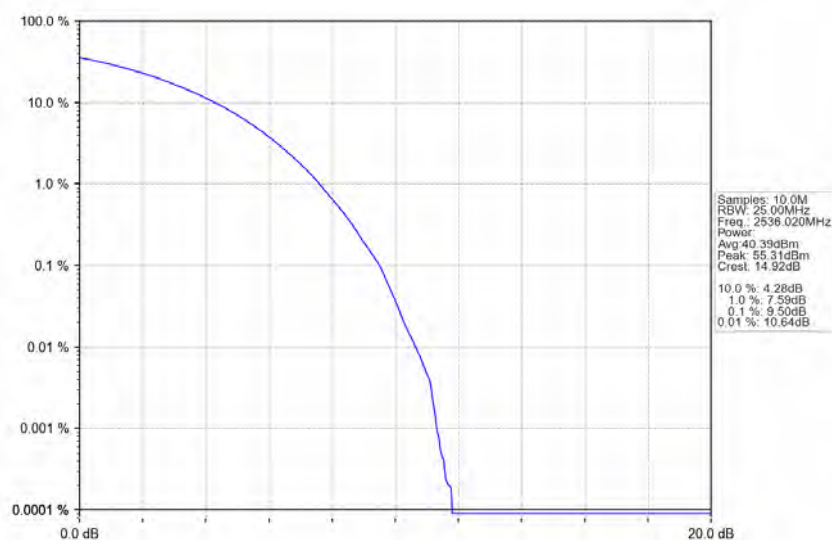


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2592.99MHz_Ant1

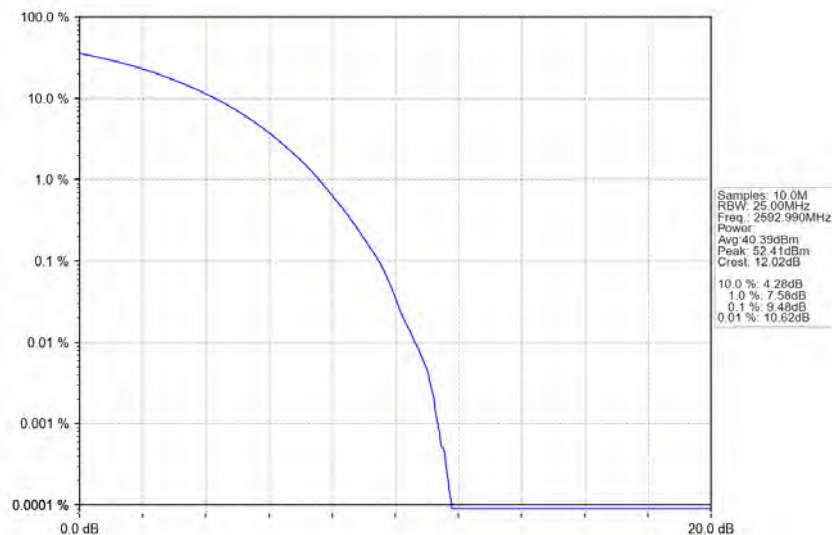


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2592.99MHz_Ant1

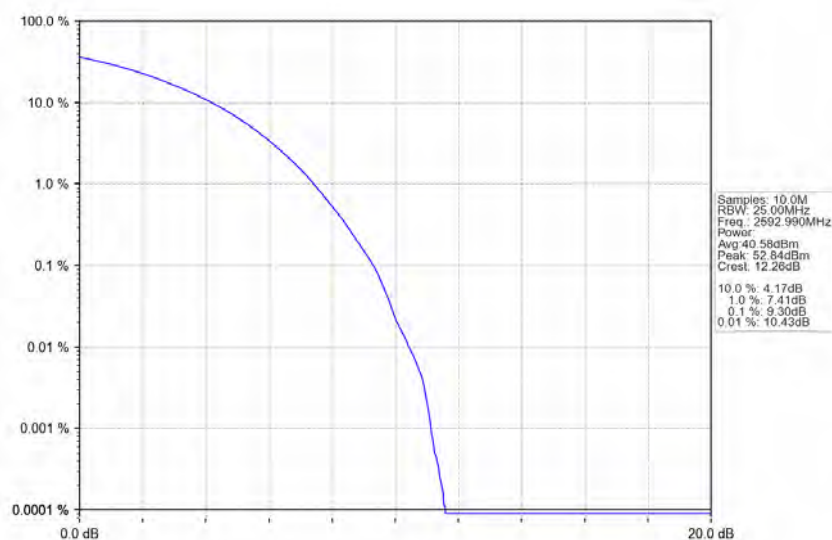


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_QPSK_CC1:2649.99MHz_Ant1

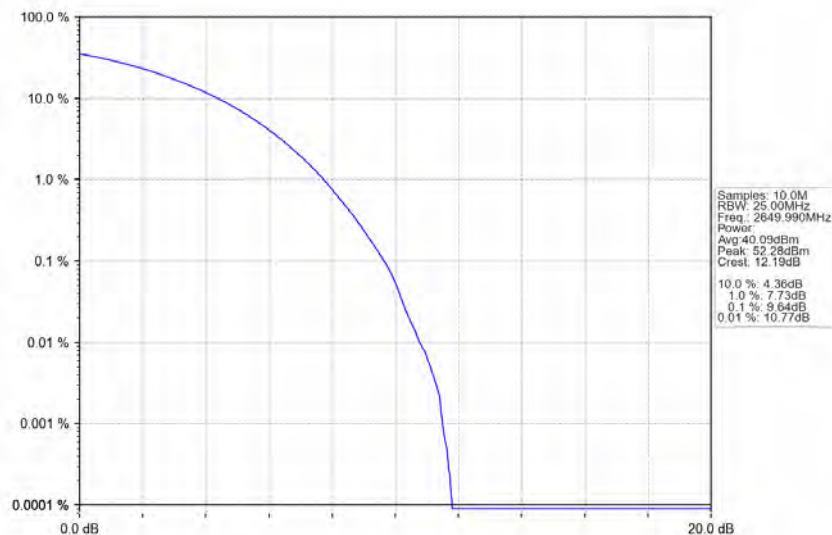


n41_BS Type 1-C_30_Single_NTNV_CC1:80MHz_256QAM_CC1:2649.99MHz_Ant1

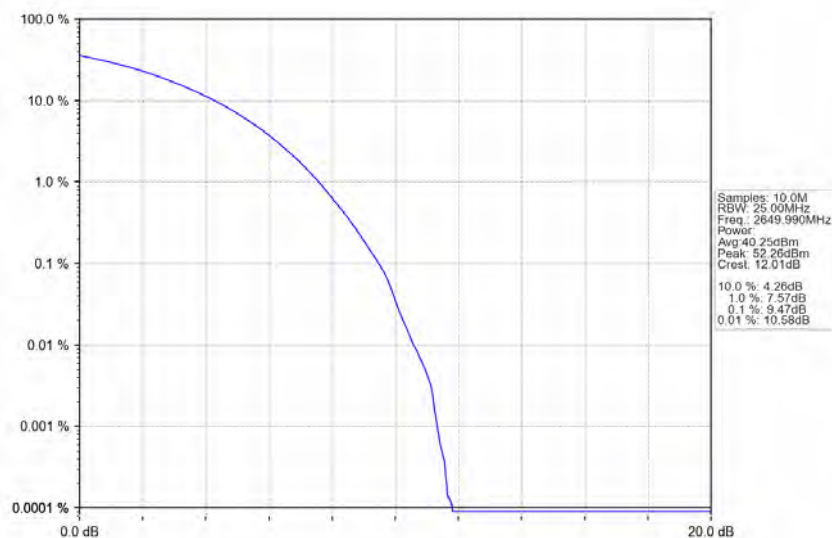


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2546.01MHz_Ant1

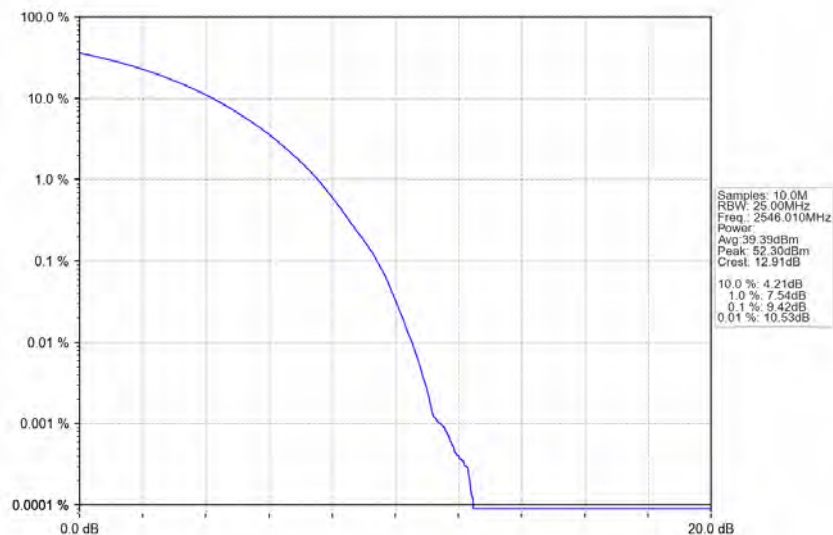


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2546.01MHz_Ant1

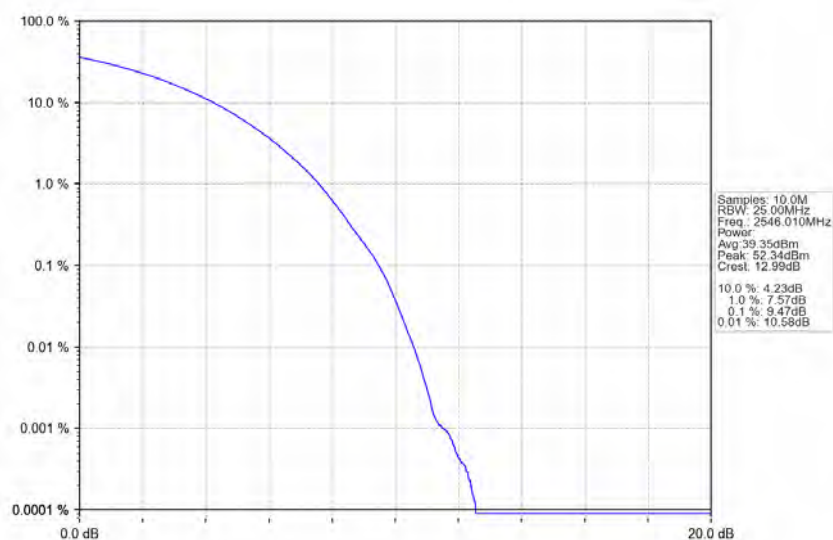


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_QPSK_CC1:2592.99MHz_Ant1

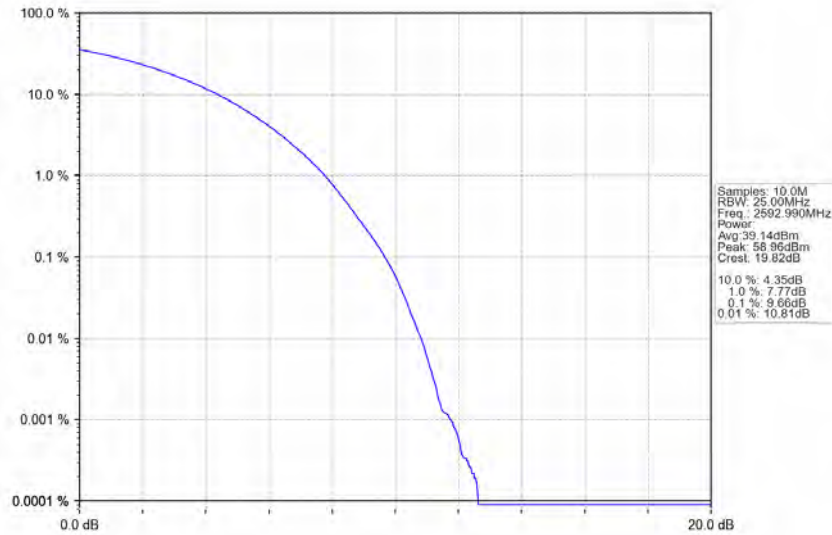


n41_BS Type 1-C_30_Single_NTNV_CC1:100MHz_256QAM_CC1:2592.99MHz_Ant1

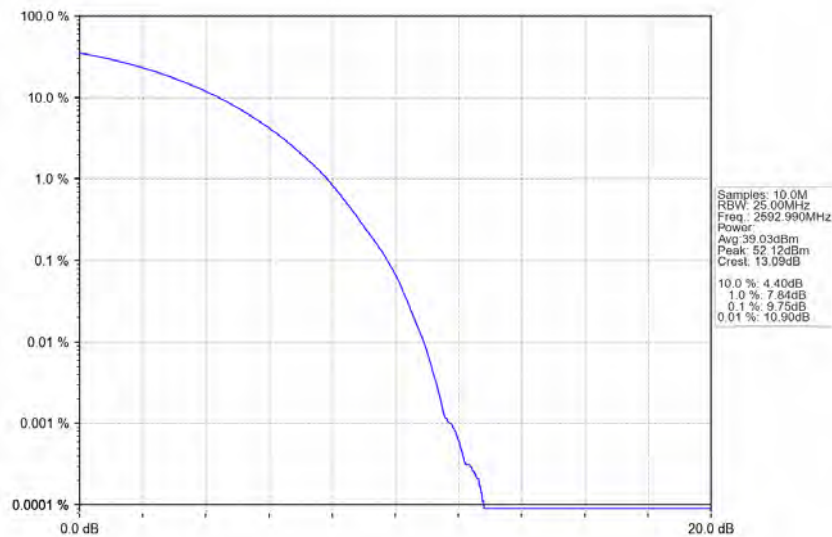

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_QPSK_CC1:2640MHz_Ant1

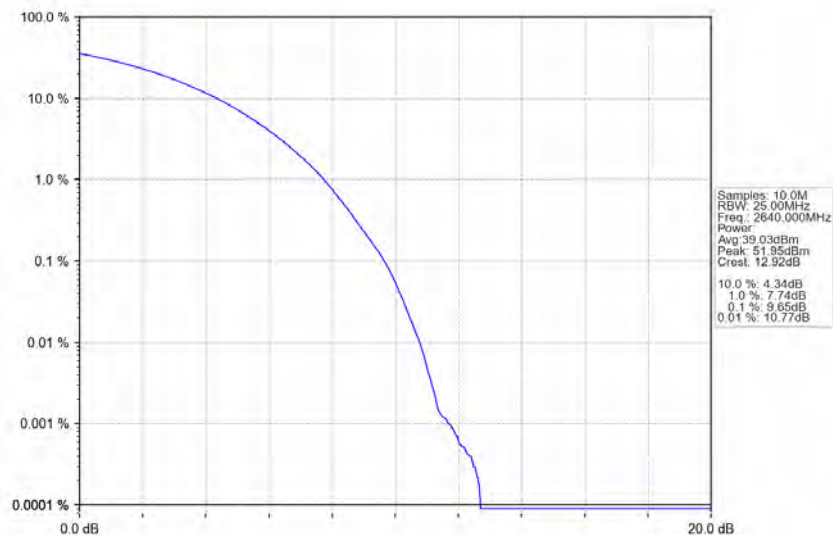

n41_BS Type 1-C 30_Single_NTNV_CC1:100MHz_256QAM_CC1:2640MHz_Ant1

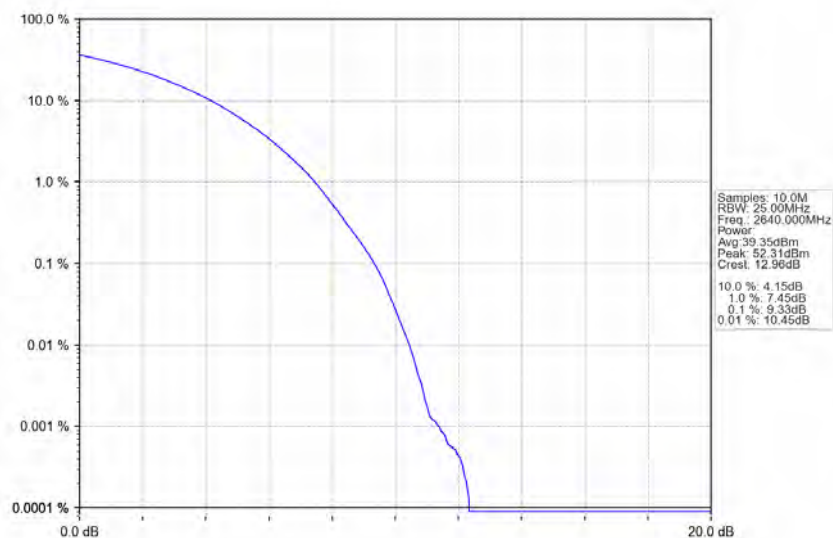

5. Spurious Emission

5.1 Test Result

5.1.1 30_Single


Band n41 Single NTN Ant1						
BW (MHz)	DL Frequency (MHz)	Test Mode	Ant No.	Spurious Emission		Verdict
				Result	Limit	
CC1:20	CC1:2506.02	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2679.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
CC1:40	CC1:2516.01	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2670	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
CC1:50	CC1:2521.02	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2664.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
CC1:60	CC1:2526	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2659.98	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
CC1:80	CC1:2536.02	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2649.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
CC1:100	CC1:2546.01	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2592.99	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass
	CC1:2640	QPSK	1	Refer To Test Graph		Pass
		256QAM	1	Refer To Test Graph		Pass

Note: According to ANSI C63.26:2015 section 5.2.5.3: For MIMO mode, Conducted Band Edge and Conducted Spurious Emission are tested on a single output port and then adjusted according to $10 \cdot \lg(N_{\text{ANT}})$ rule. MIMO 2*2=SSO+3.01dB, MIMO 4*4=SSO+6.02dB. The worst mode is Ant1, all test results have a margin of at least 6.02dB from the limit values within the corresponding test range, so the test result is pass.


5.2 Test Graph

5.2.1 30_Single

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

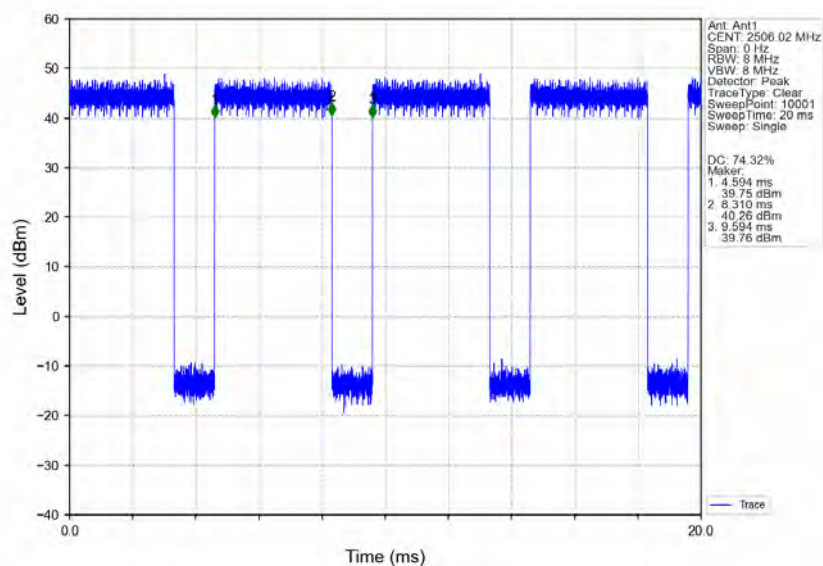


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

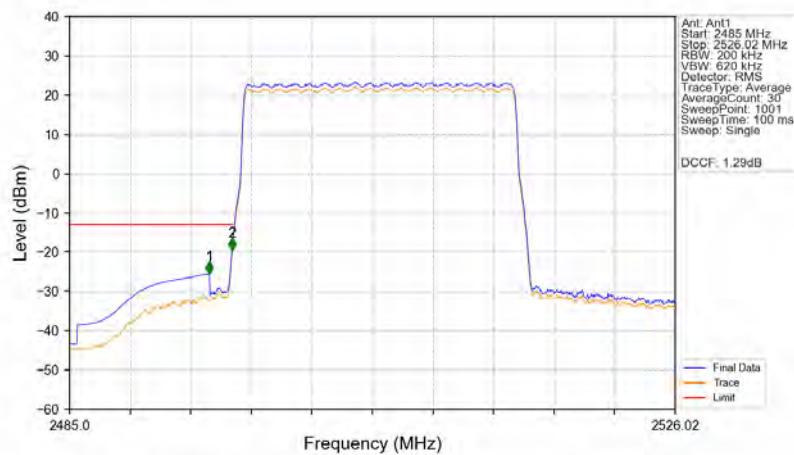


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2495	1	CHP	1	2494.476	-25.60	-13	Pass
2495	2496	0.2	/	2	2495.993	-19.45	-13	Pass
2496	2526.02	0.2	/	/	/	/	/	/


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

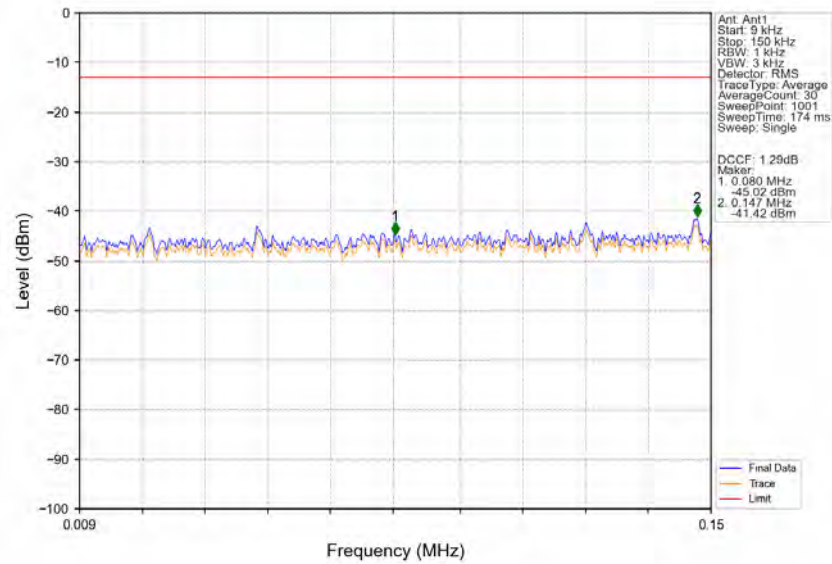


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

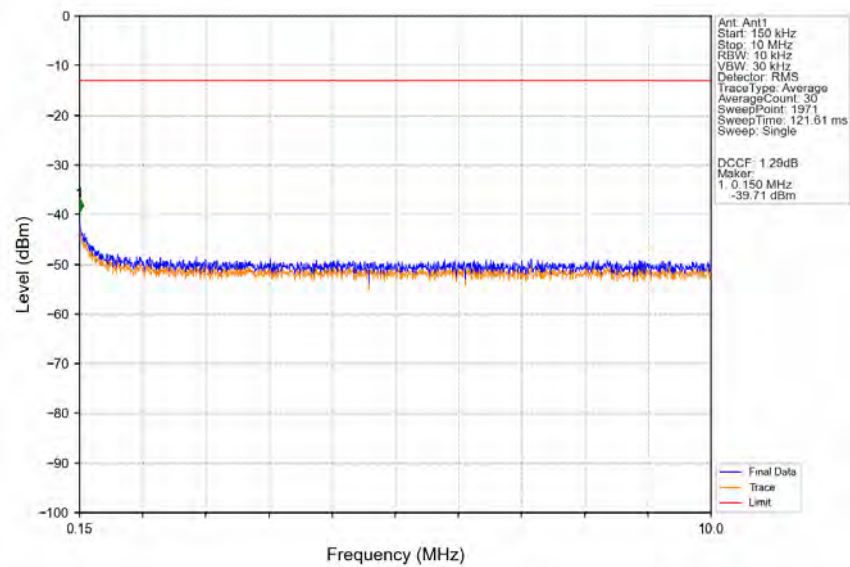


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

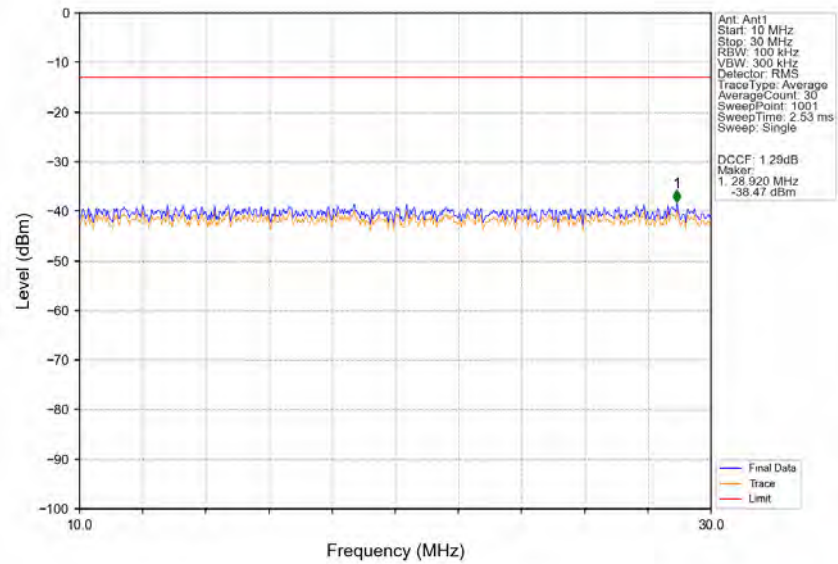


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

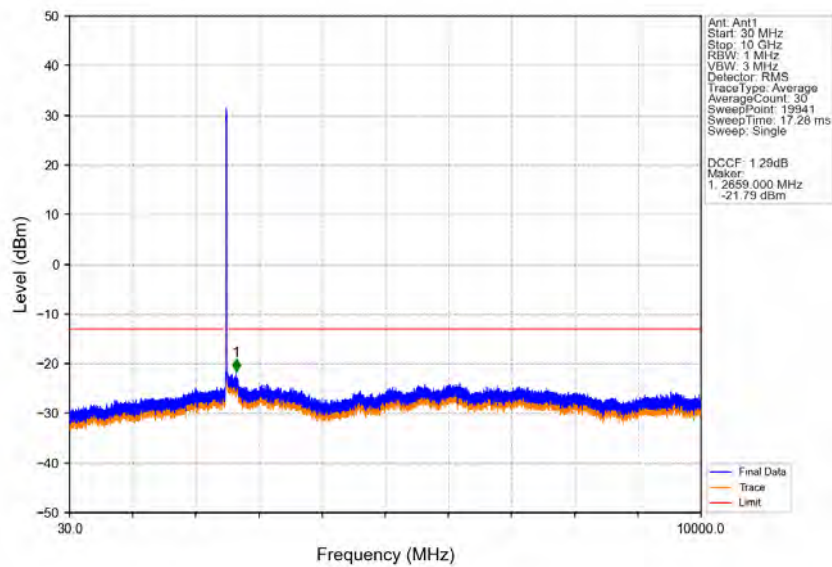


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

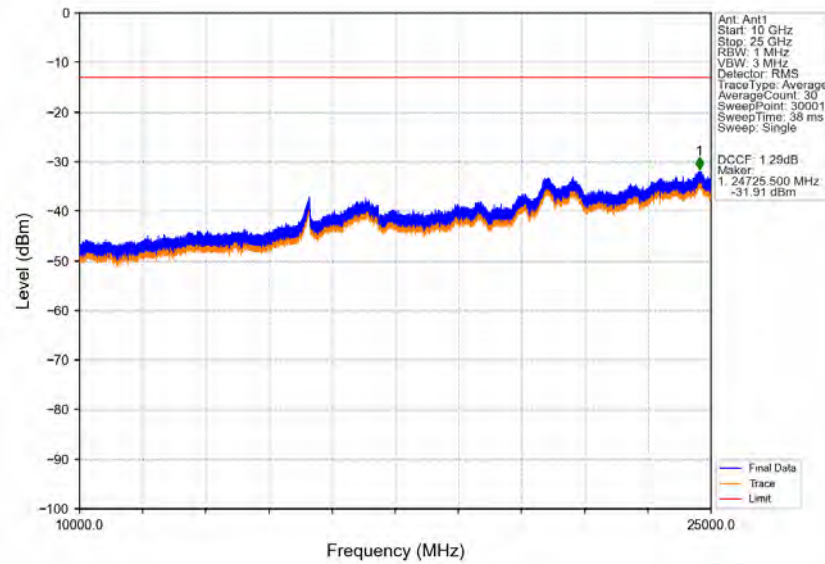


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2506.02MHz_Ant1

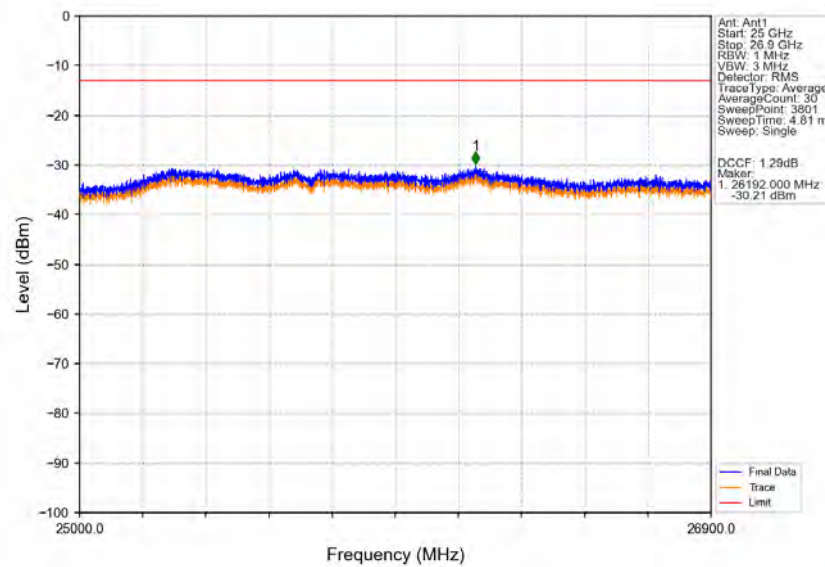

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

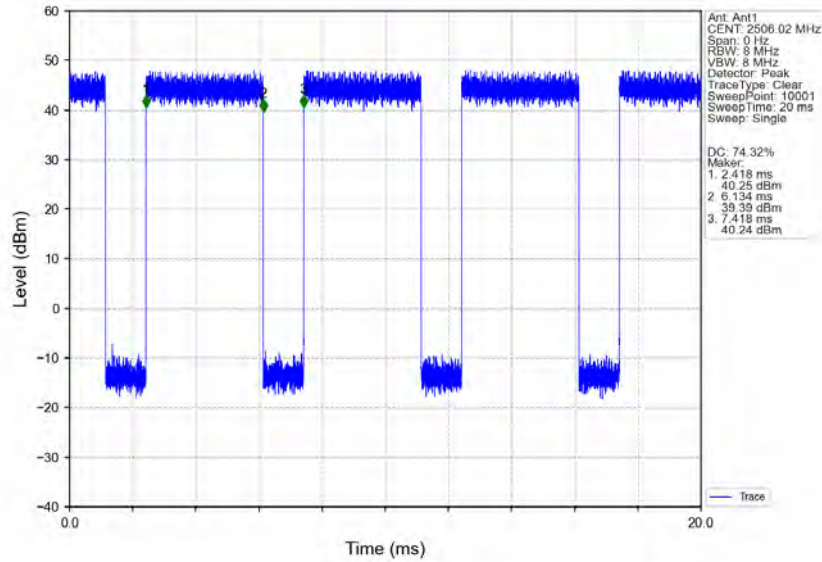


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

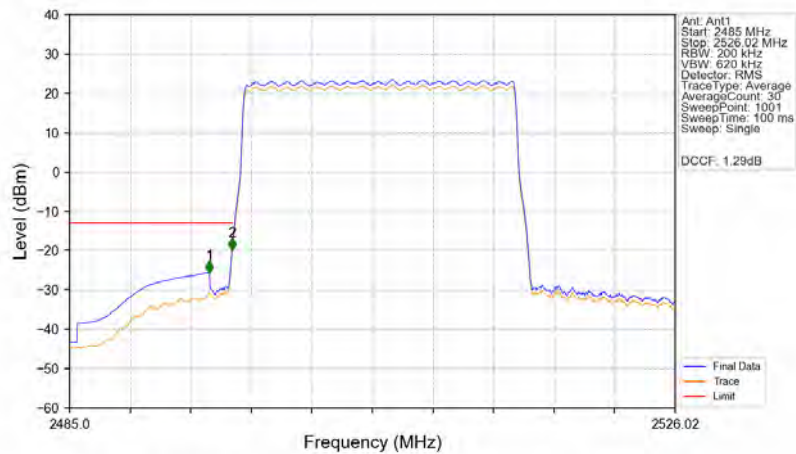


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2495	1	CHP	1	2494.476	-25.62	-13	Pass
2495	2496	0.2	/	2	2495.993	-19.93	-13	Pass
2496	2526.02	0.2	/	/	/	/	/	/


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

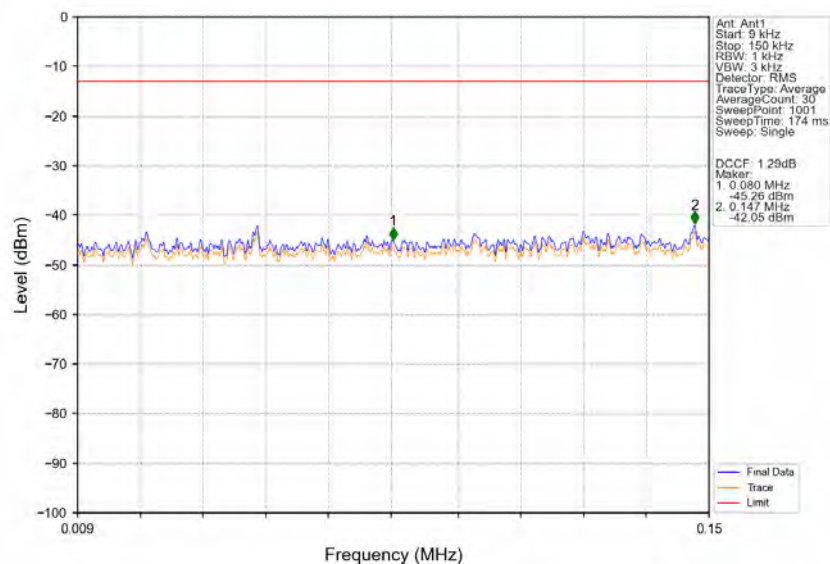


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

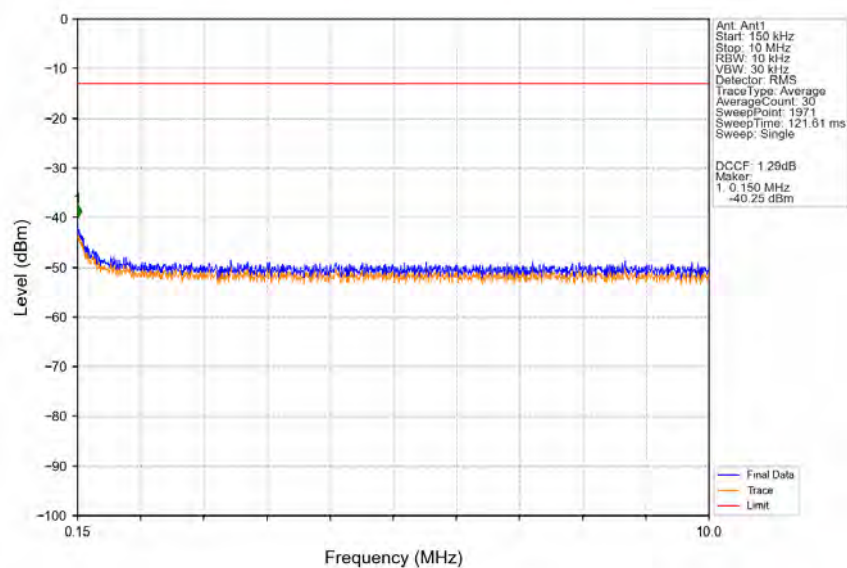


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

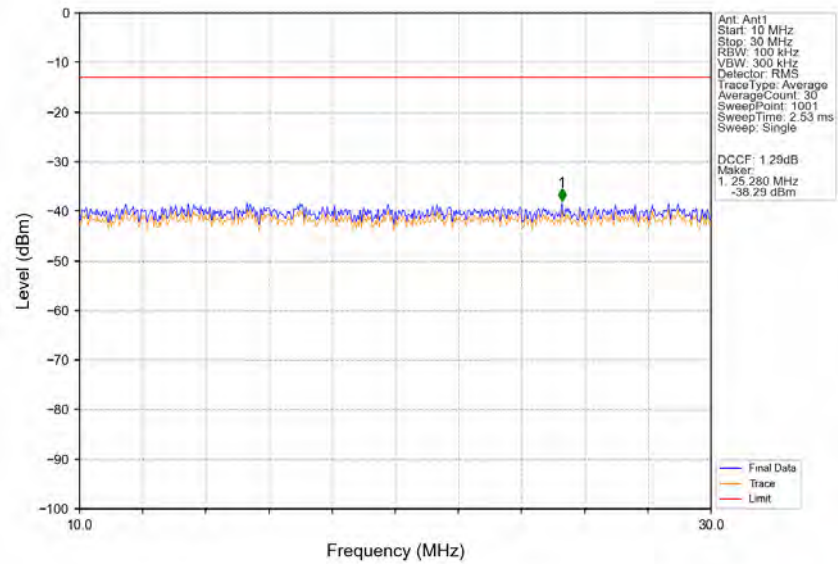


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

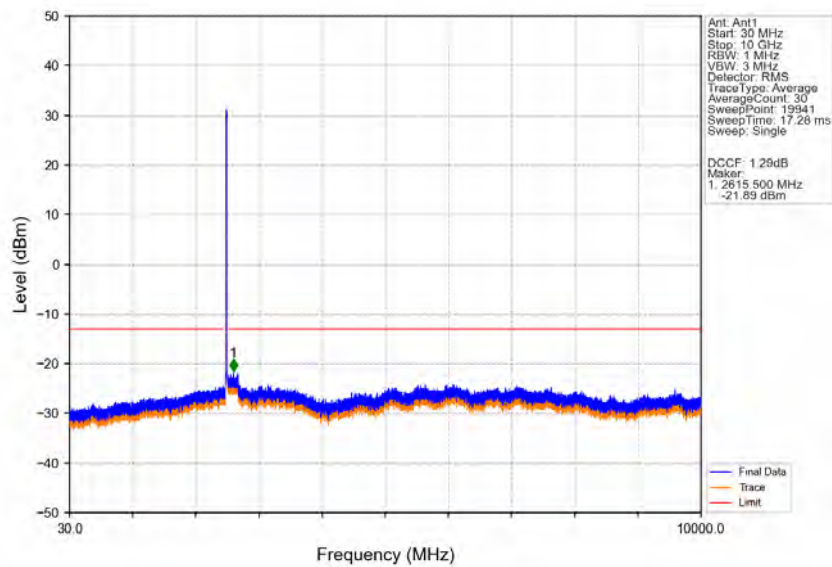


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

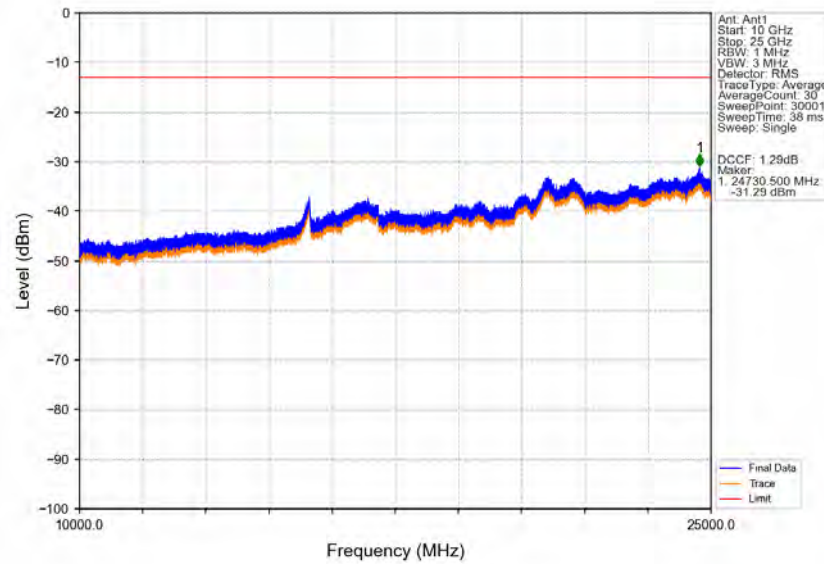


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2506.02MHz_Ant1

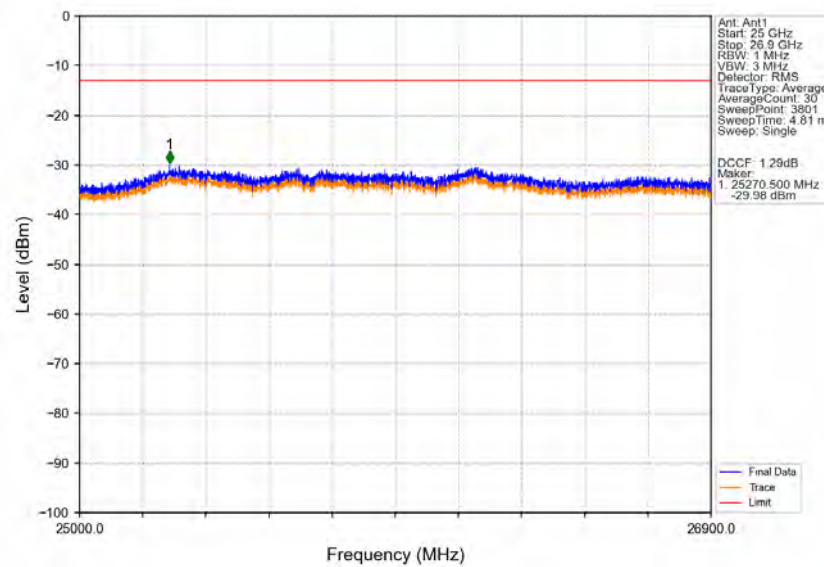

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

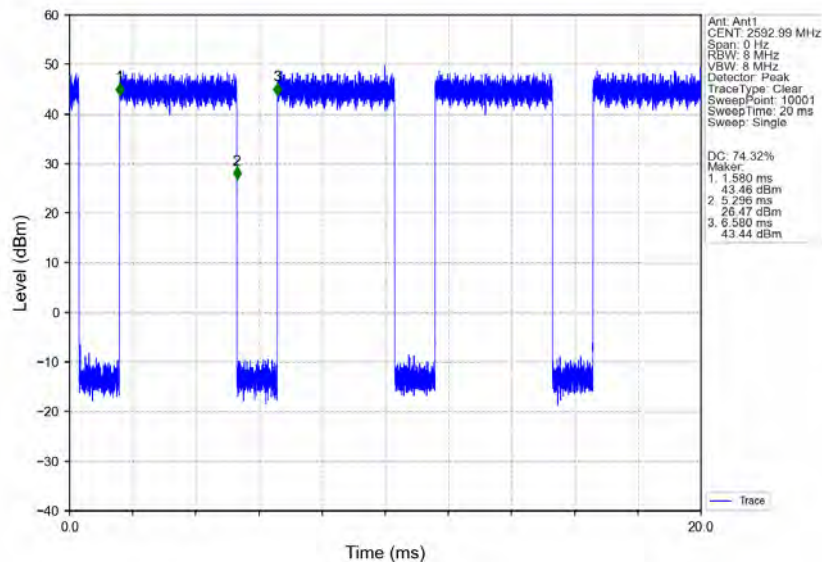


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

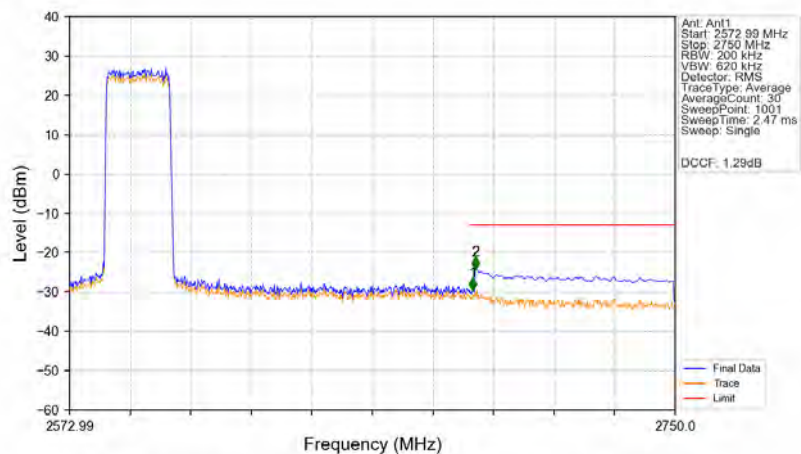


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2572.99	2690	0.2	/	/	/	/	/	/
2690	2691	0.2	/	1	2690.879	-29.52	-13	Pass
2691	2750	1	CHP	2	2691.587	-24.18	-13	Pass


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

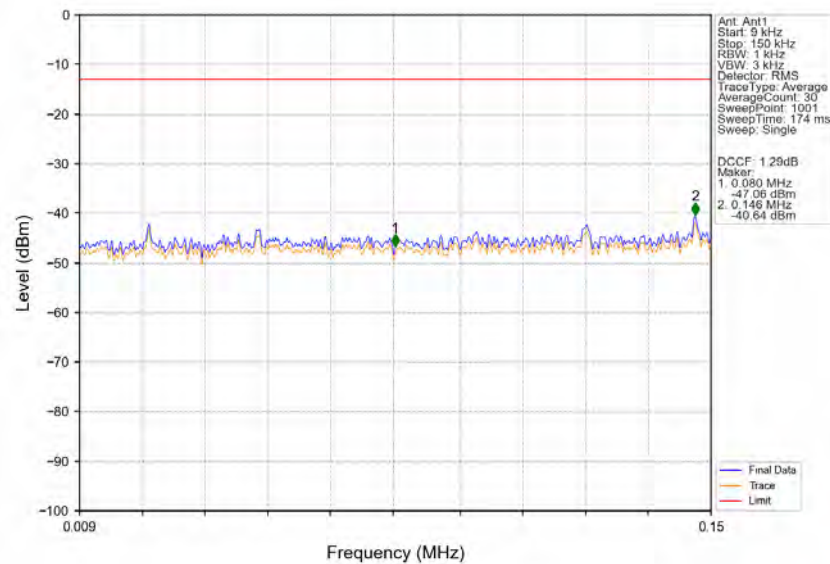


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

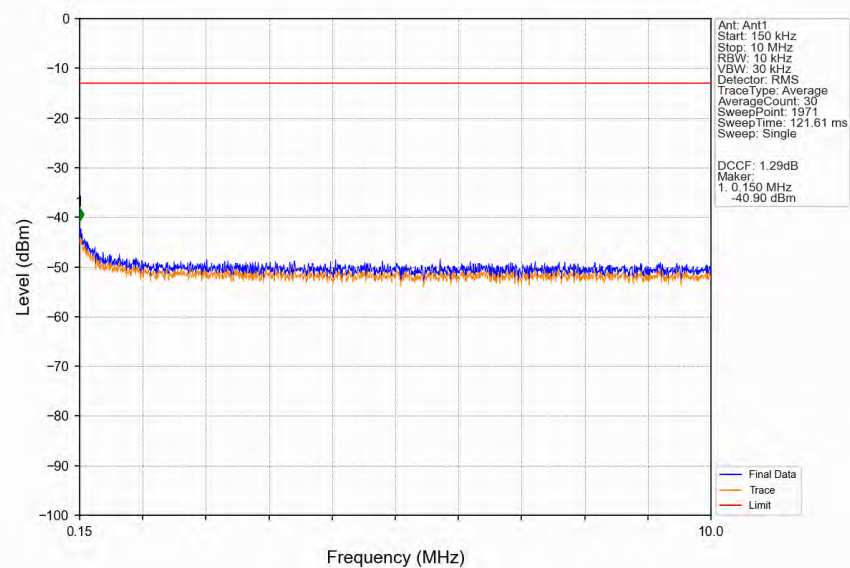


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

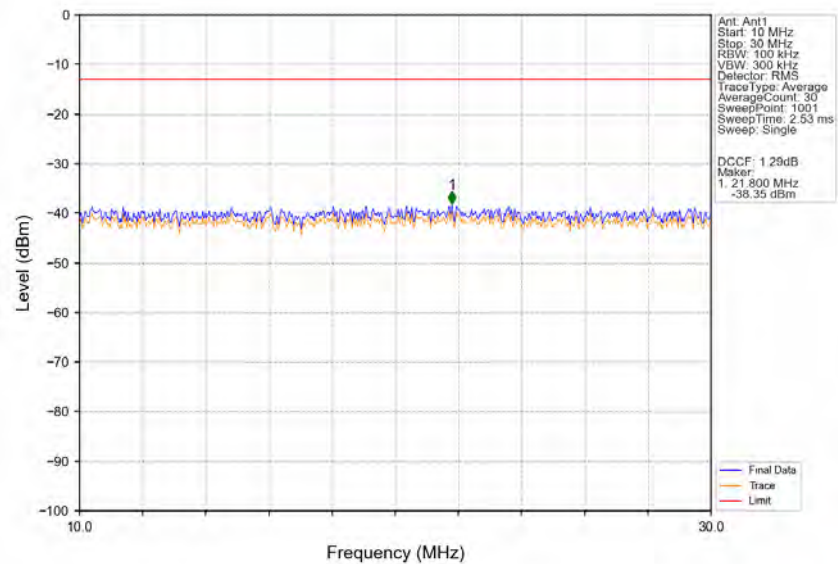


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

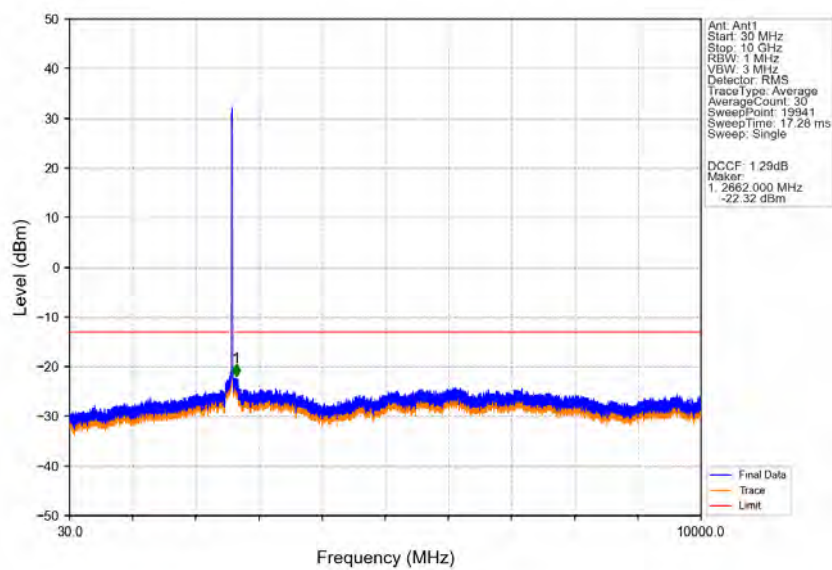


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

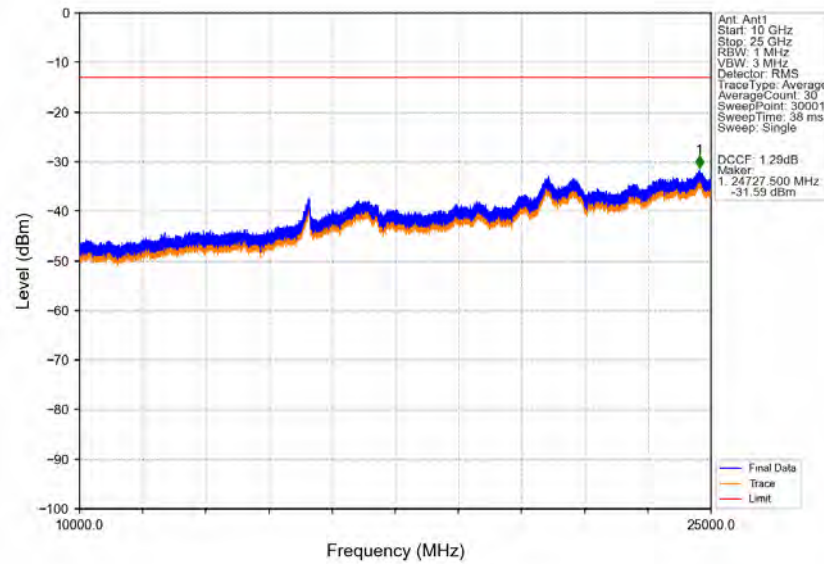


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2592.99MHz_Ant1

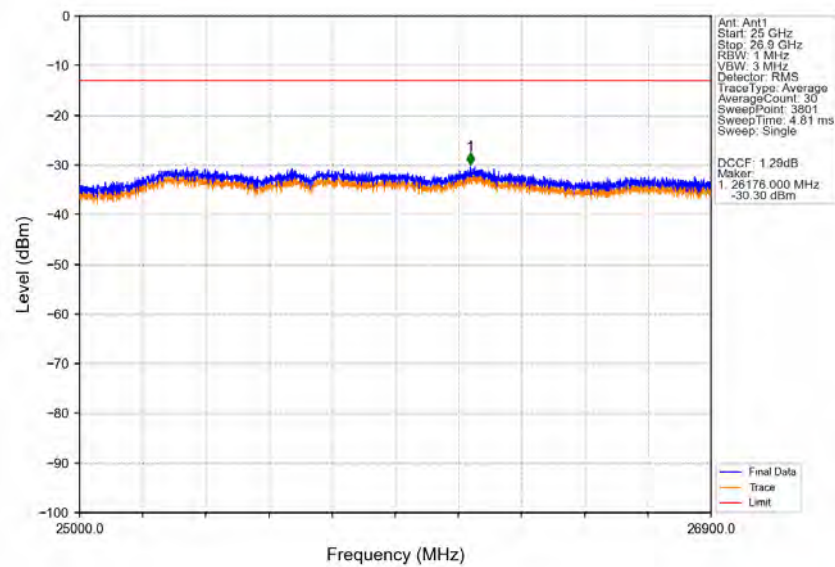

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

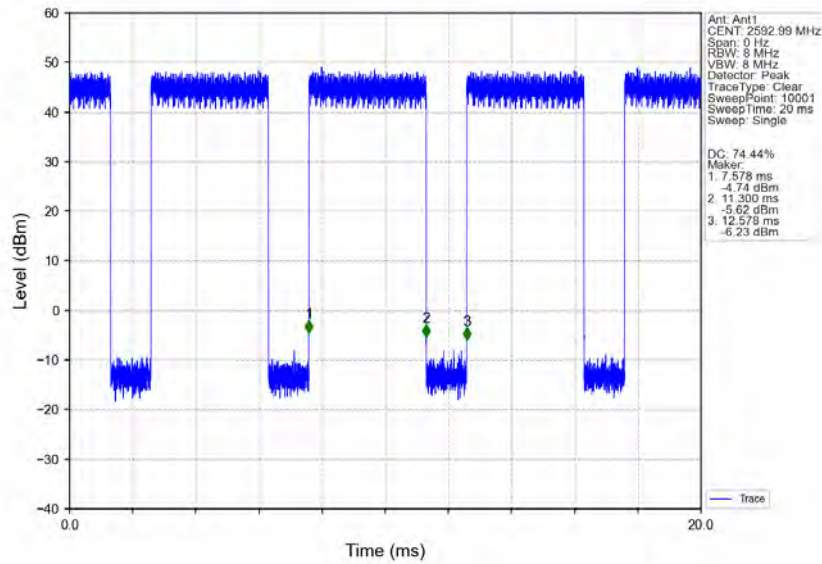


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

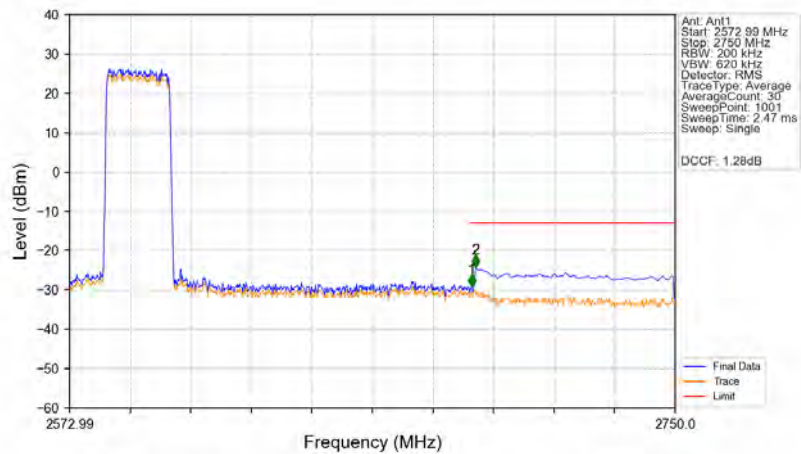


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2572.99	2690	0.2	/	/	/	/	/	/
2690	2691	0.2	/	1	2690.525	-29.16	-13	Pass
2691	2750	1	CHP	2	2691.587	-24.29	-13	Pass


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

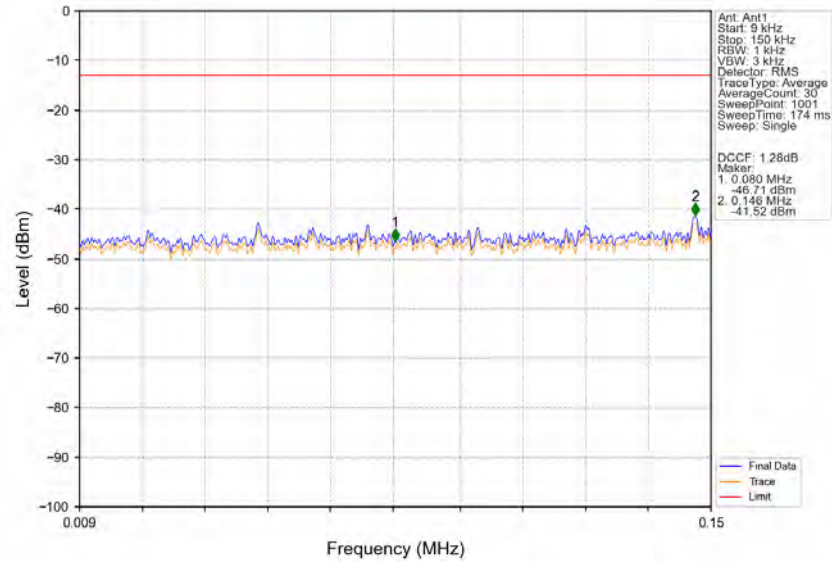


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

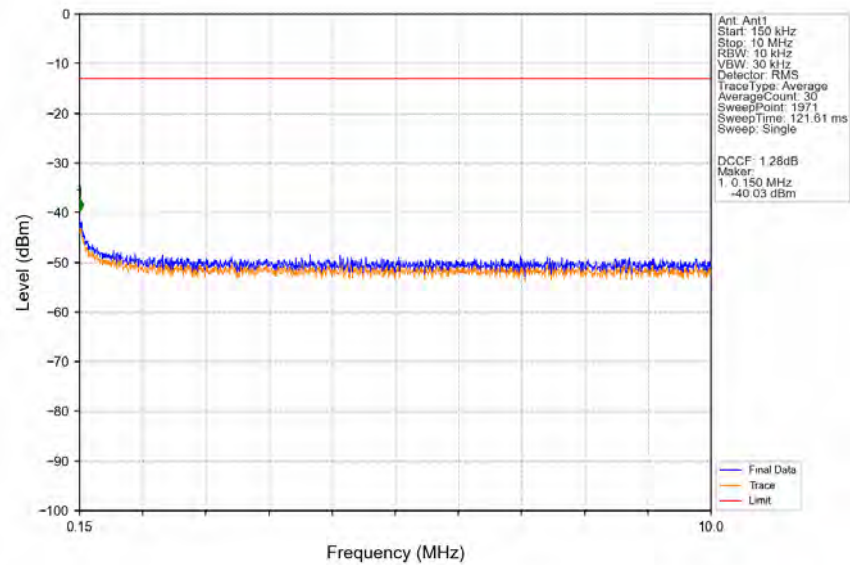


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

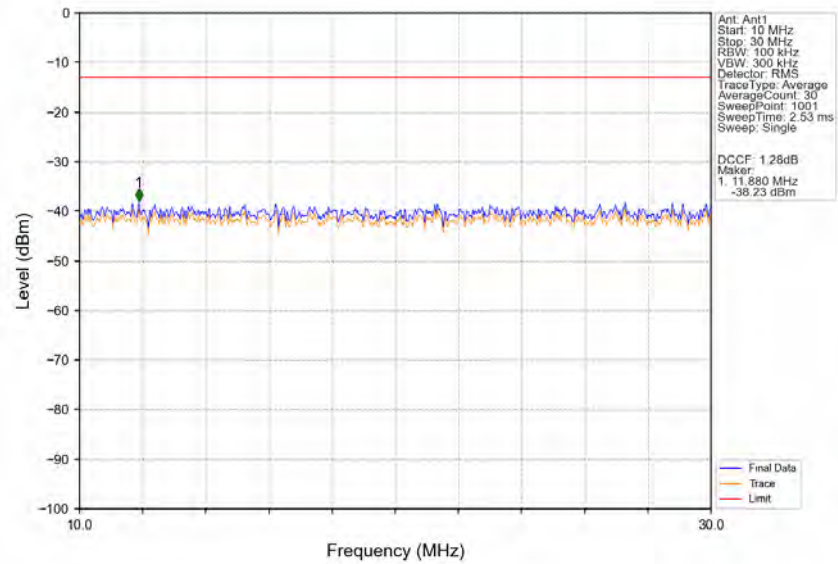


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

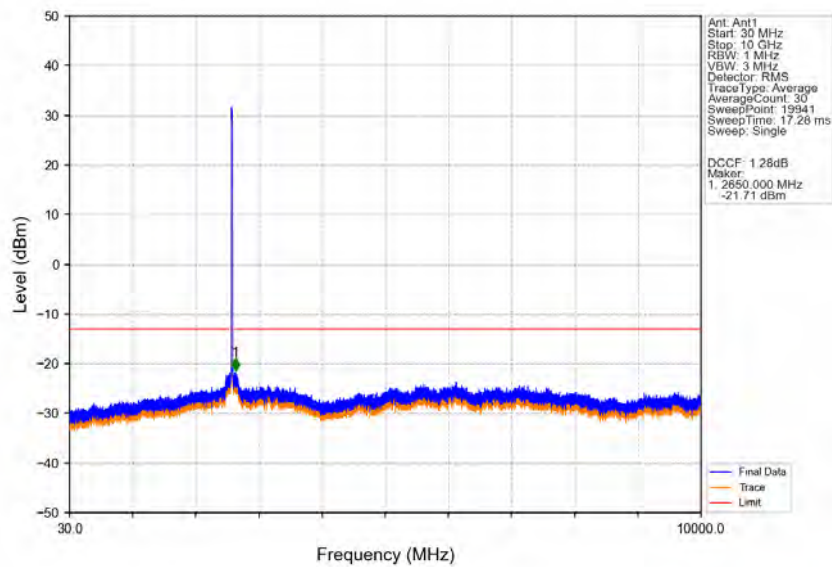


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

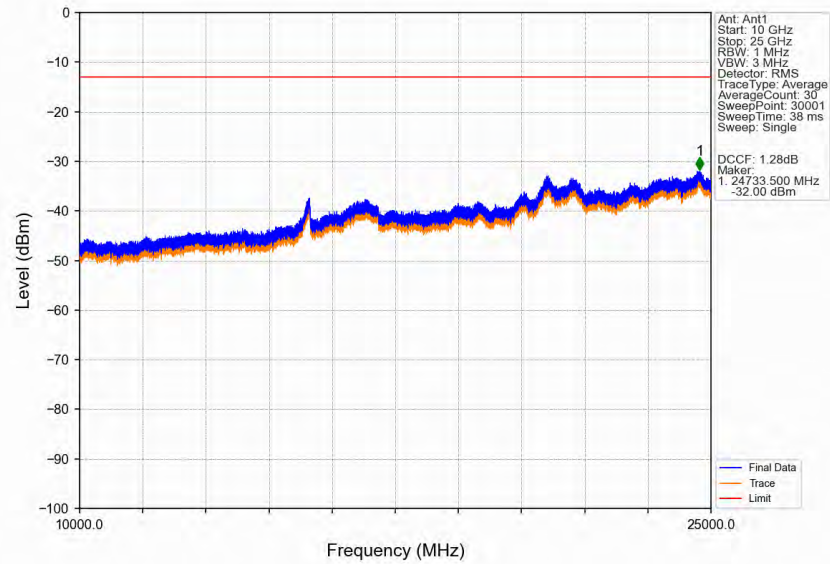


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2592.99MHz_Ant1

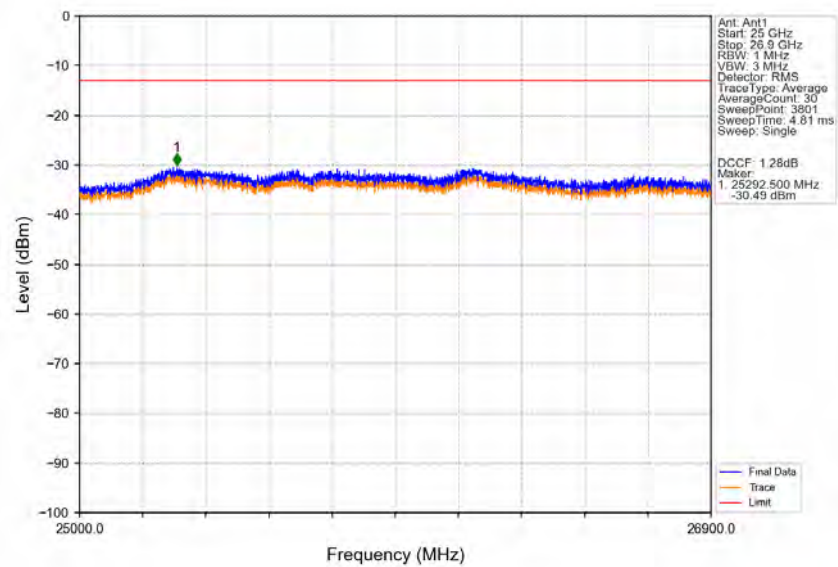

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

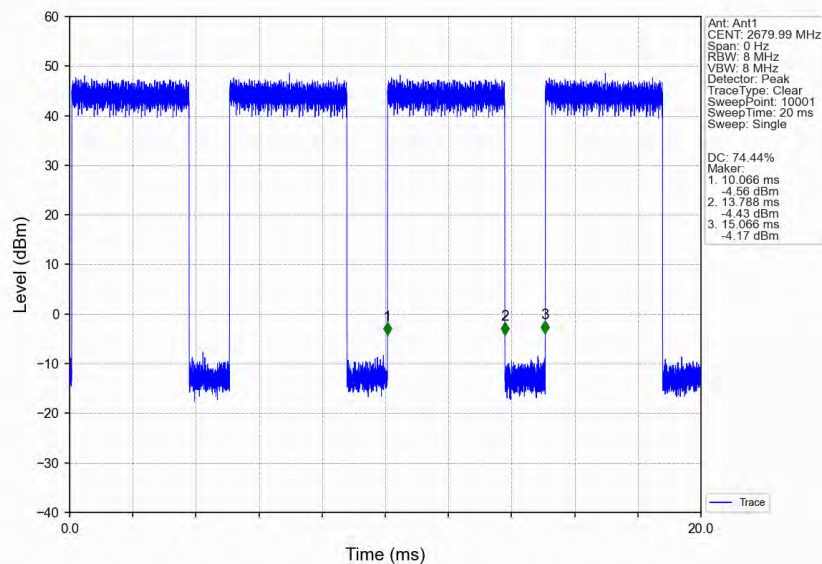


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

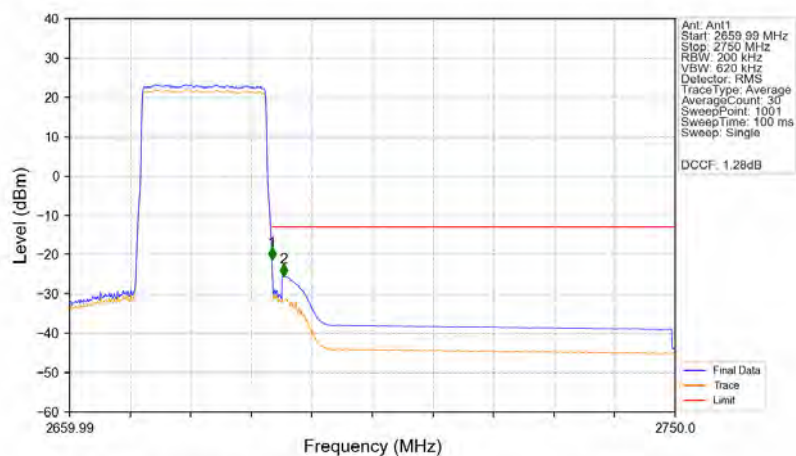


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2659.99	2690	0.2	/	/	/	/	/	/
2690	2691	0.2	/	1	2690.053	-21.27	-13	Pass
2691	2750	1	CHP	2	2691.854	-25.57	-13	Pass


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

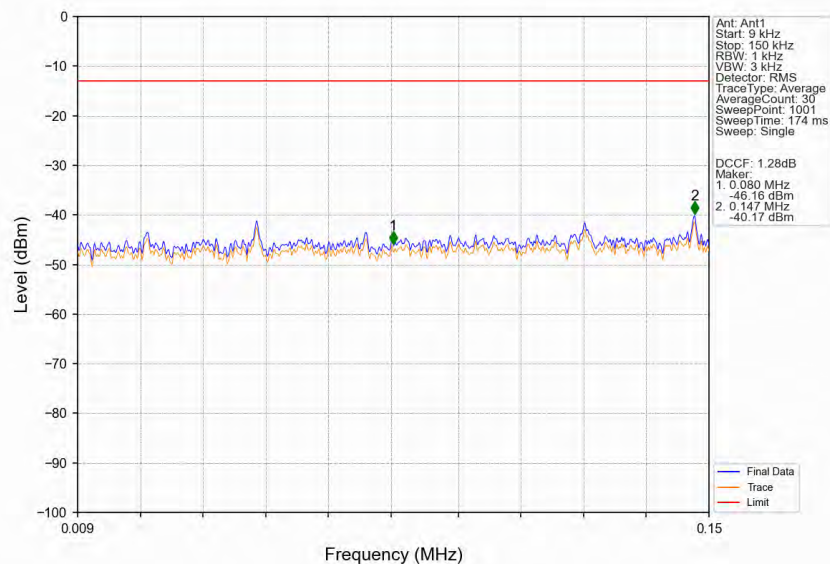


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

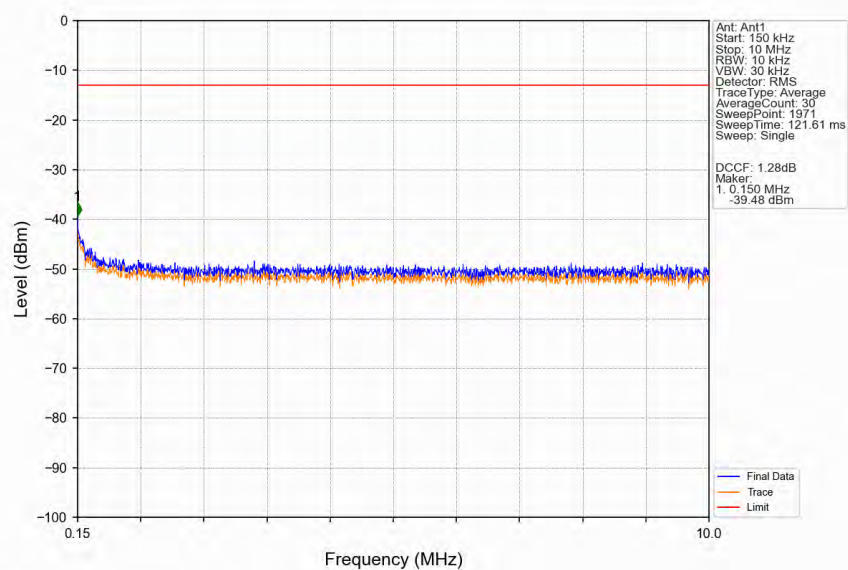


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

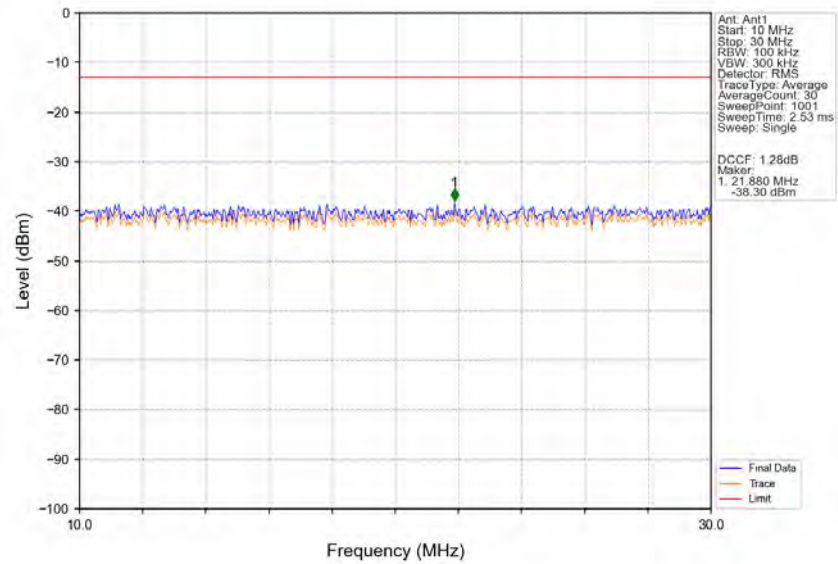


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

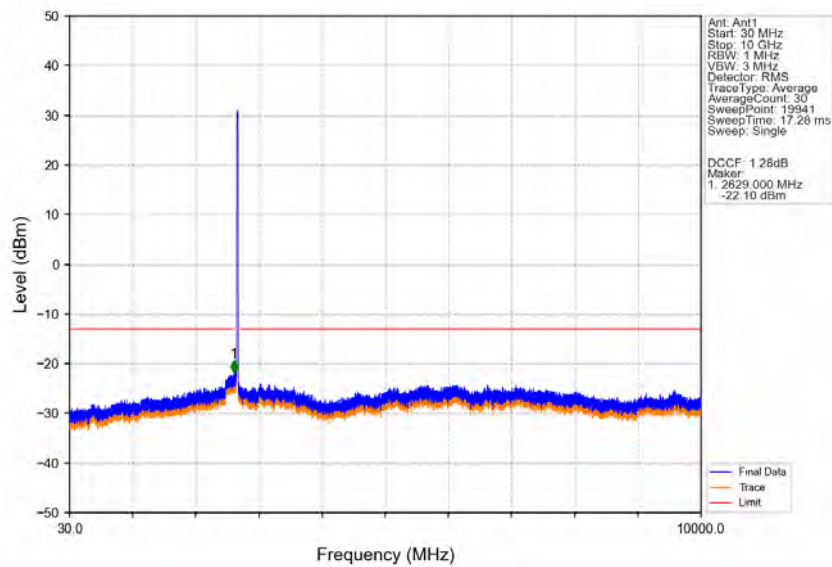


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

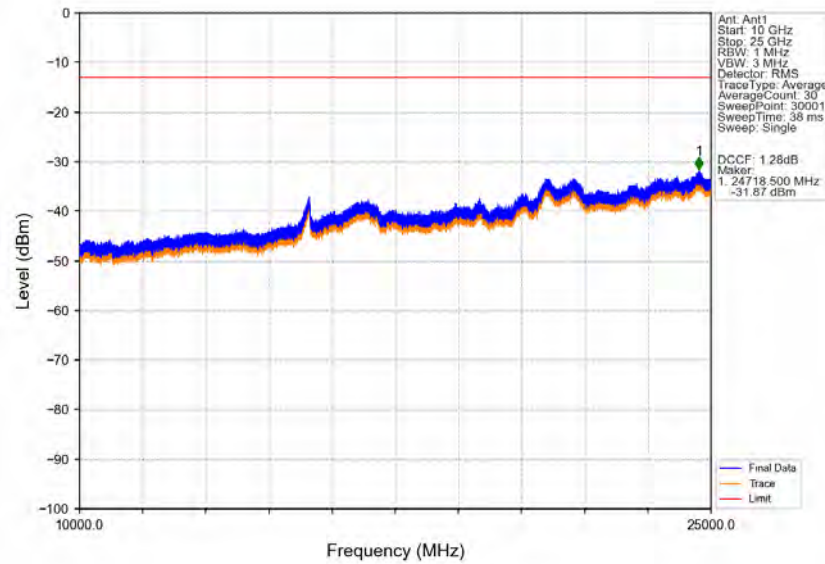


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_QPSK_CC1:2679.99MHz_Ant1

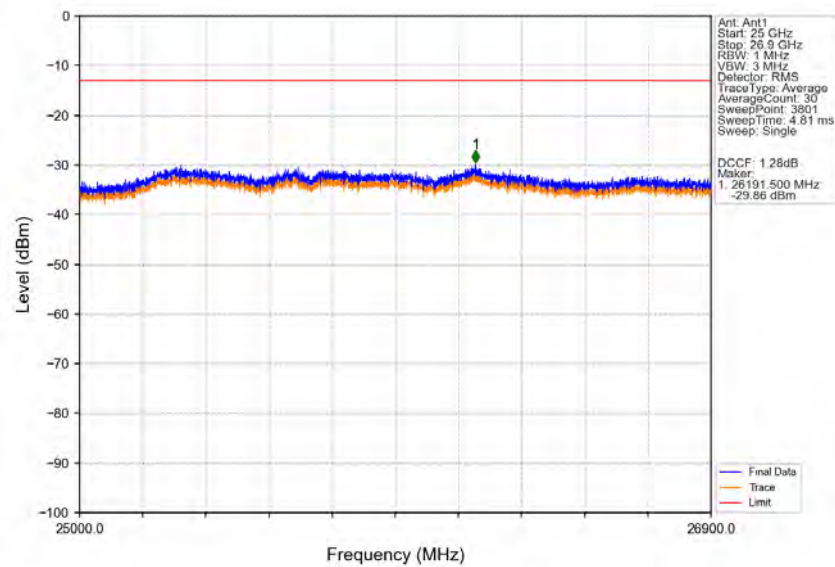

n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

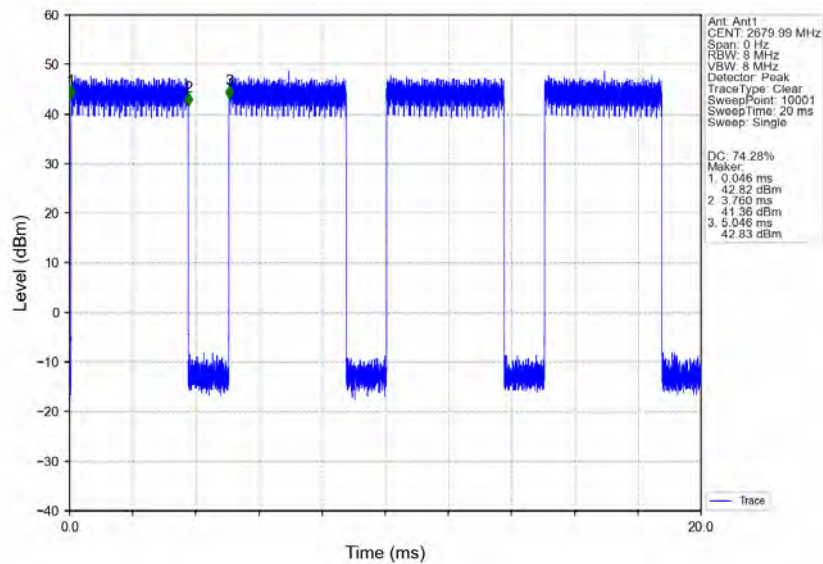


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

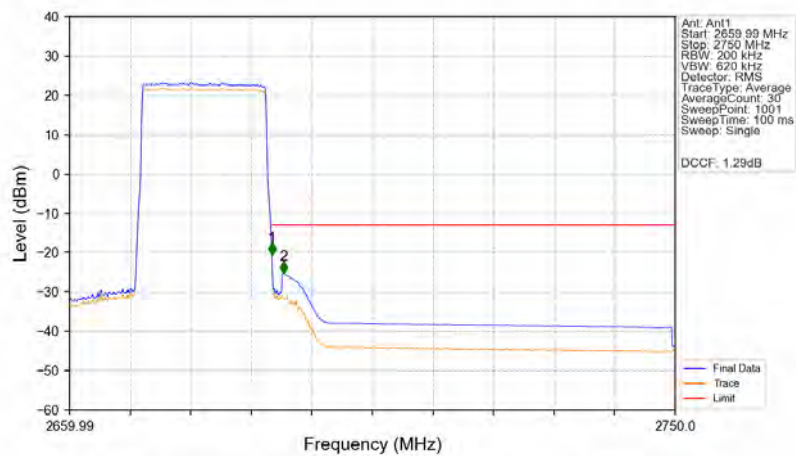


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2659.99	2690	0.2	/	/	/	/	/	/
2690	2691	0.2	/	1	2690.053	-20.52	-13	Pass
2691	2750	1	CHP	2	2691.854	-25.33	-13	Pass


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

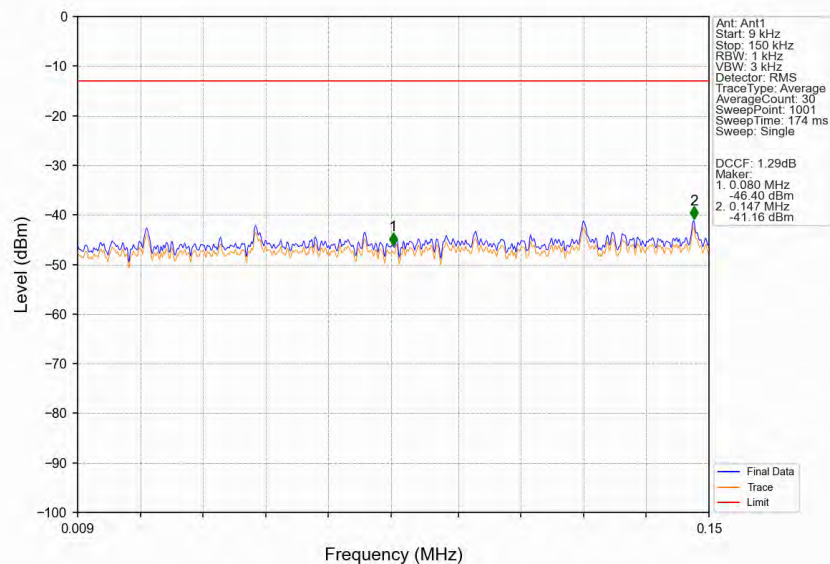


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

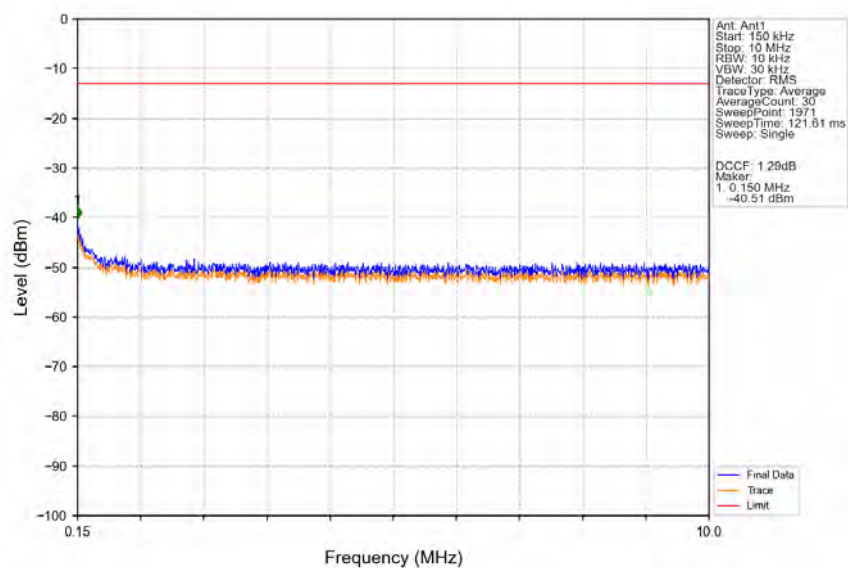


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

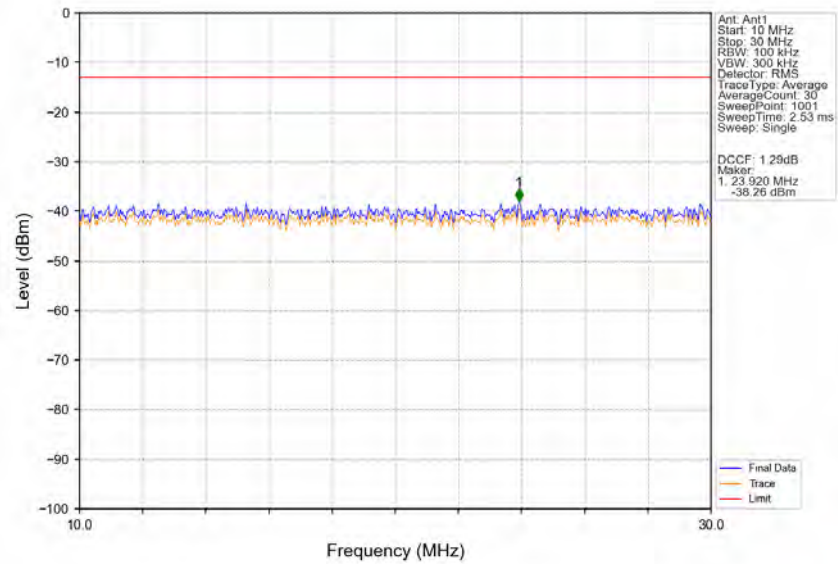


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

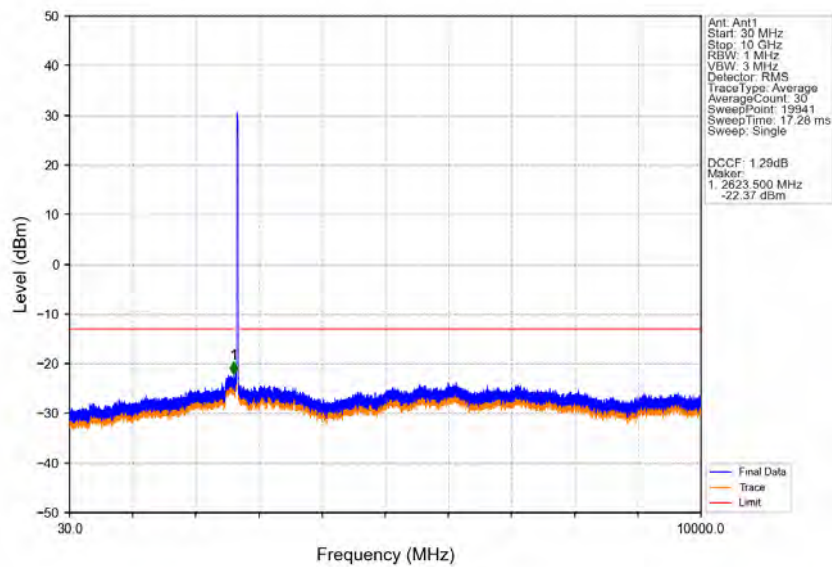


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

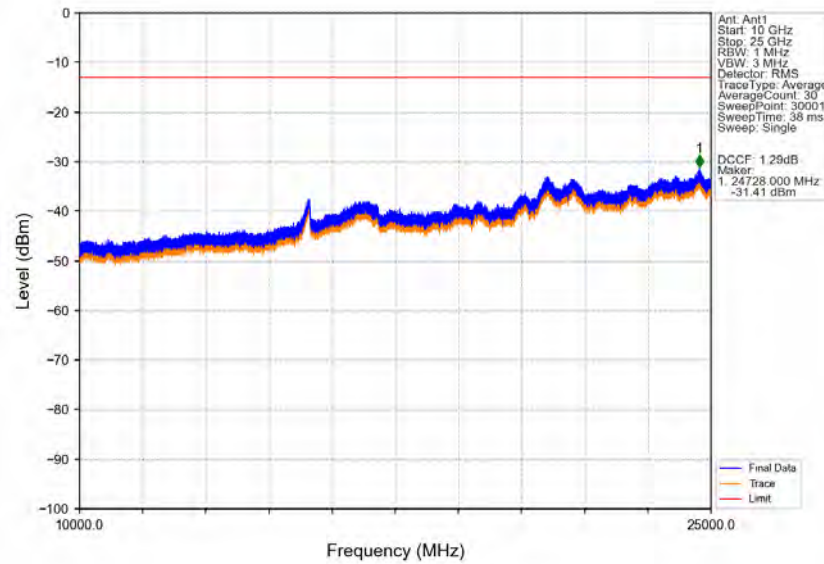


n41_BS Type 1-C_30_Single_NTNV_CC1:20MHz_256QAM_CC1:2679.99MHz_Ant1

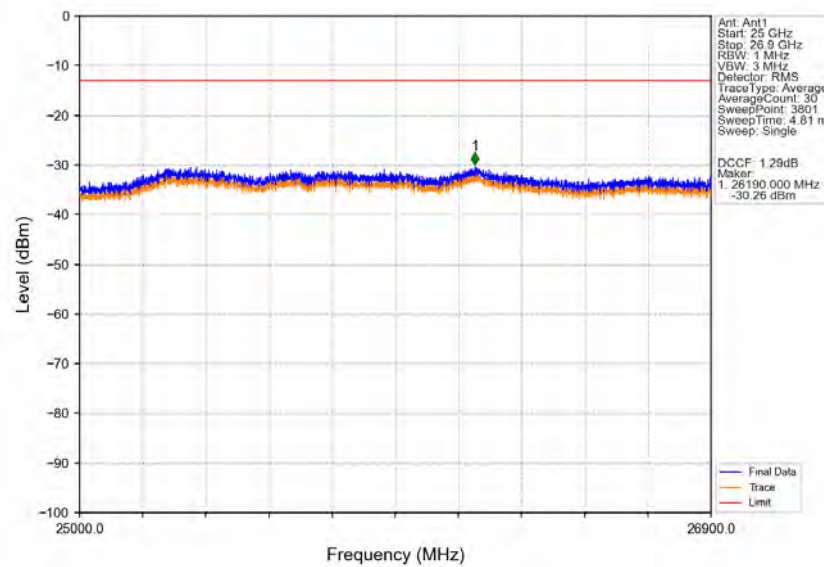

n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

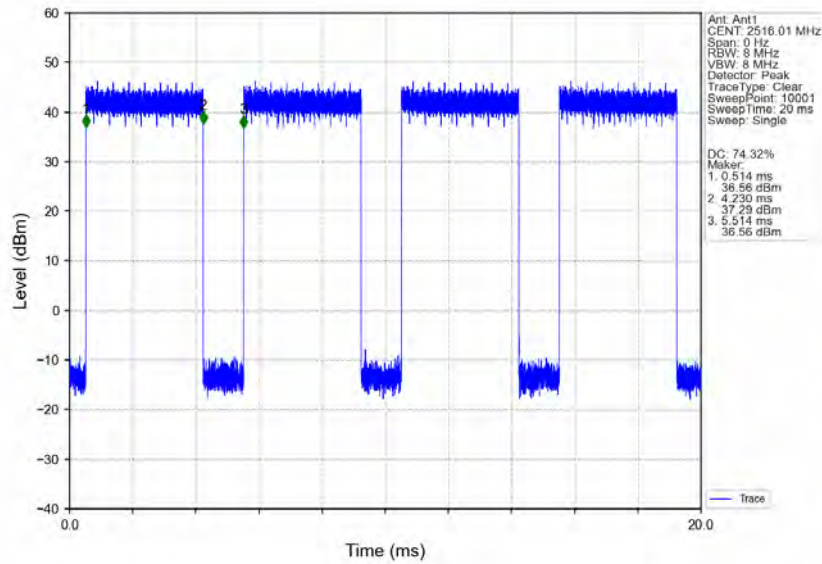


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

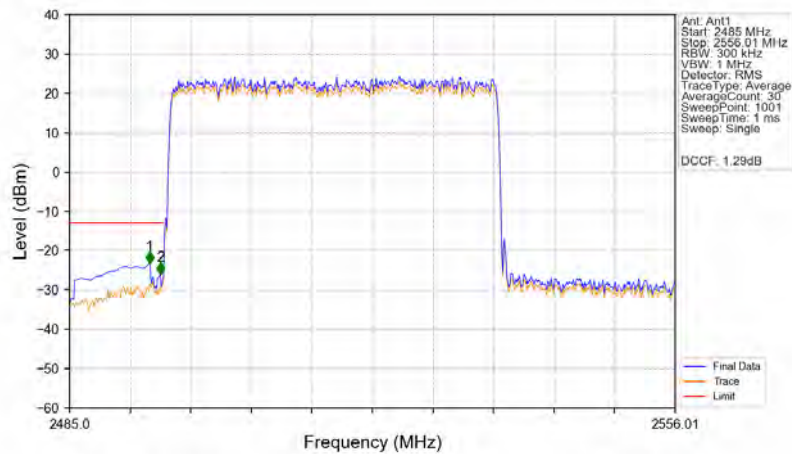


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2495	1	CHP	1	2494.373	-23.33	-13	Pass
2495	2496	0.572	CHP	2	2495.651	-26.11	-13	Pass
2496	2556.01	0.3	/	/	/	/	/	/


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

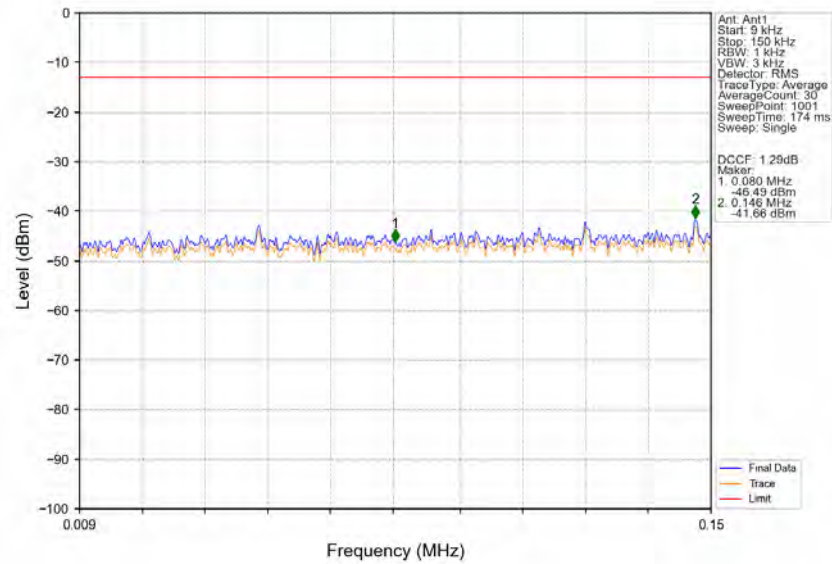


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

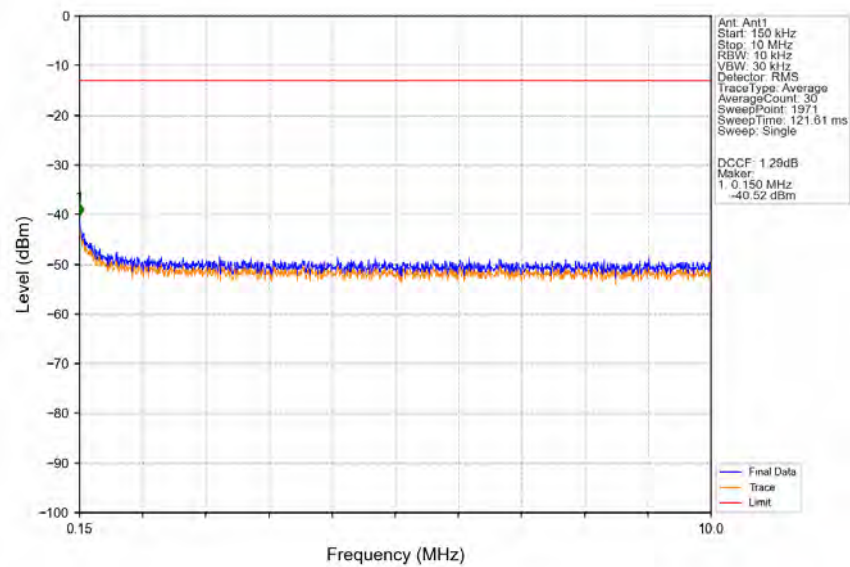


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

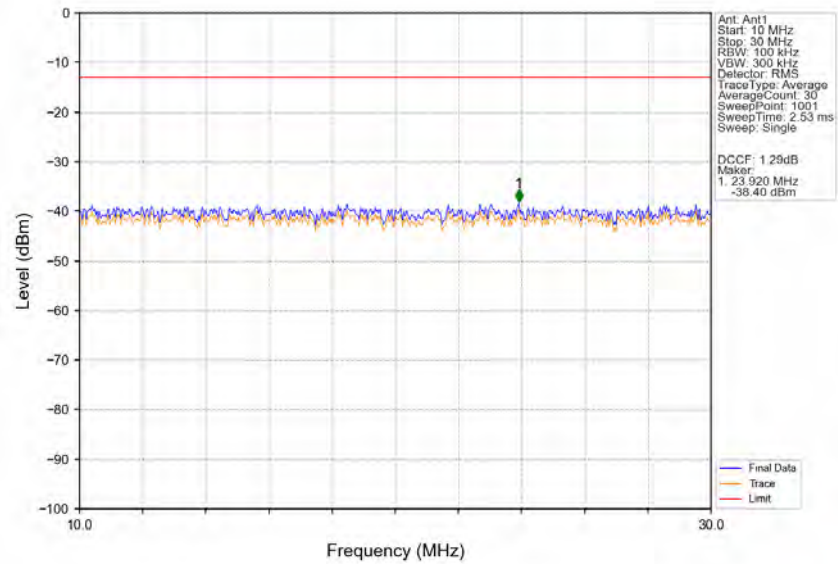


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

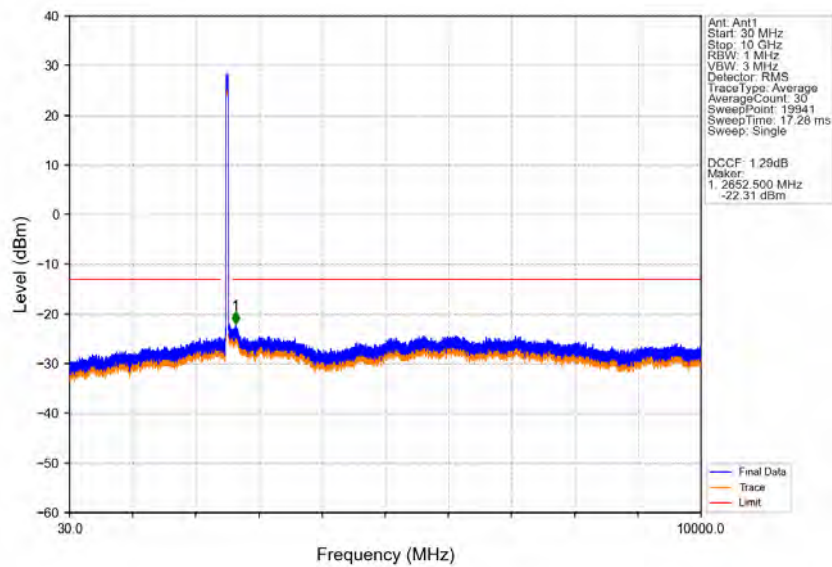


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

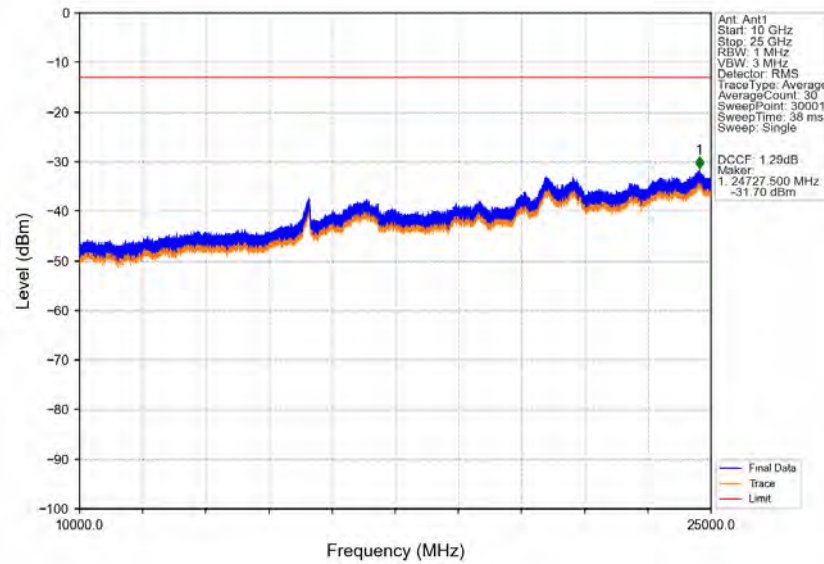


n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_QPSK_CC1:2516.01MHz_Ant1

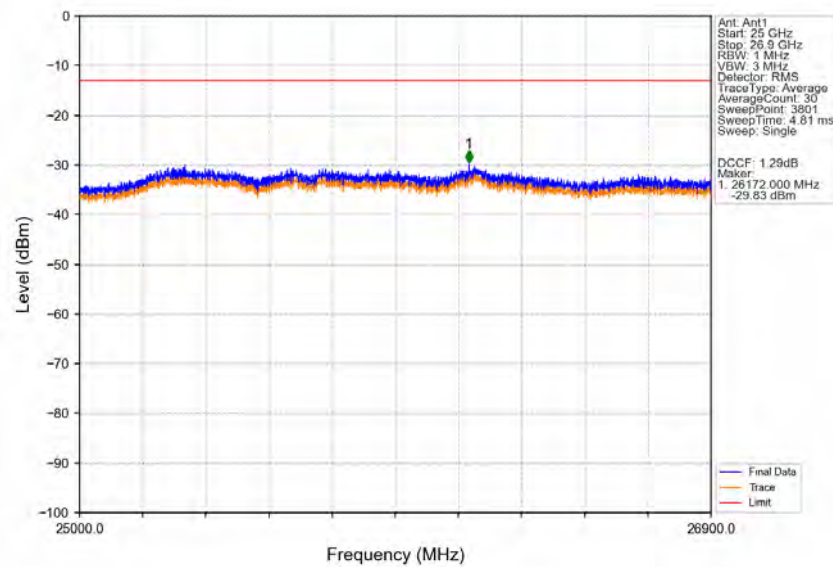

n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

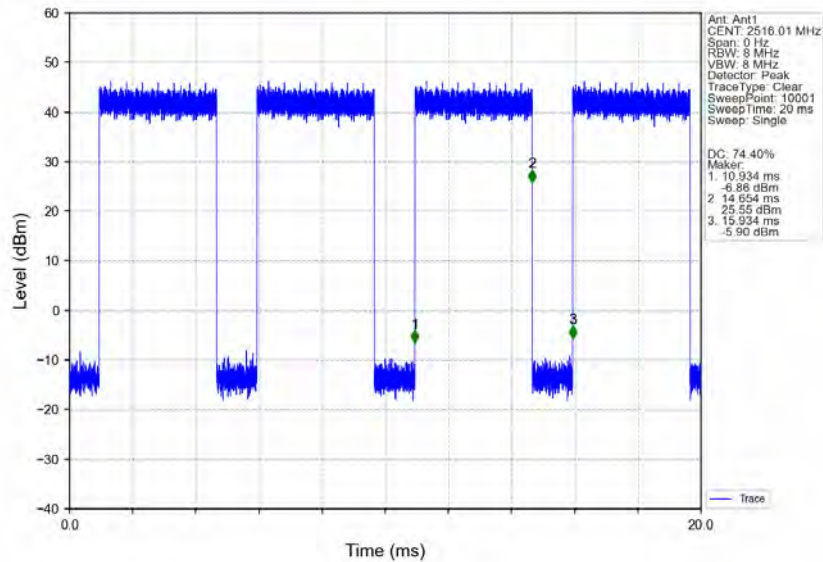

n41_BS Type 1-C_30_Single_NTNV_CC1:40MHz_256QAM_CC1:2516.01MHz_Ant1

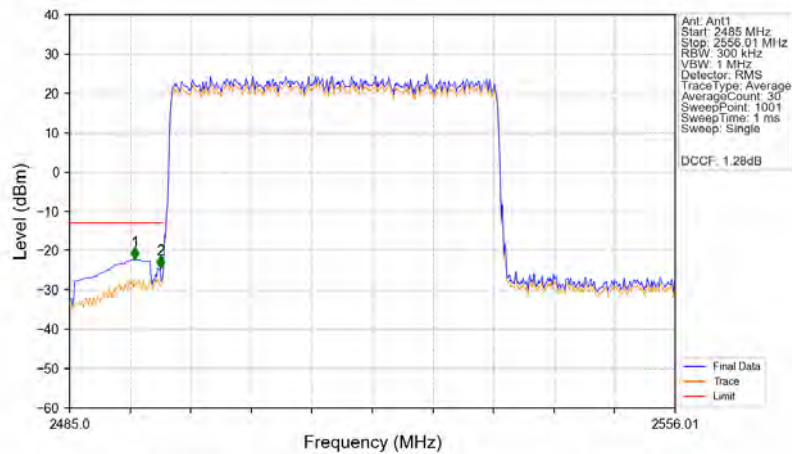

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2495	1	CHP	1	2492.669	-22.21	-13	Pass
2495	2496	0.572	CHP	2	2495.651	-24.37	-13	Pass
2496	2556.01	0.3	/	/	/	/	/	/