








深圳市睿达永利科技

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-6.36	-6.47	-6.59	-6.57	-6.50	-6.24	-6.29	-6.34	-6.27	-6.42	-6.61
Gain (dBi)	-0.37	-0.34	-0.40	-0.03	0.17	0.17	-0.17	-0.14	-0.28	-0.32	-0.10
Efficiency (%)	23.10	22.54	21.92	22.01	22.37	23.79	23.52	23.25	23.59	22.82	21.82
Directivity (dB)	5.99	6.13	6.19	6.55	6.68	6.41	6.12	6.19	6.00	6.10	6.52
Peak Gain Position (Theta)	118.00	129.00	130.00	130.00	130.00	130.00	130.00	130.00	131.00	131.00	131.00
Peak Gain Position (Phi)	114.00	68.00	68.00	68.00	68.00	67.00	68.00	68.00	68.00	68.00	68.00
Efficiency ThetaPol (%)	6.73	6.53	6.46	6.54	6.66	7.21	7.21	7.22	7.46	7.27	6.90
Efficiency PhiPol (%)	16.37	16.01	15.46	15.47	15.71	16.58	16.31	16.03	16.13	15.55	14.92
Upper Hem. Efficiency (%)	10.01	9.71	9.33	9.22	9.37	10.06	9.89	9.89	10.06	9.85	9.55
Lower Hem. Efficiency (%)	13.09	12.83	12.60	12.79	13.00	13.73	13.64	13.36	13.53	12.96	12.27

T90(H)圆度	16.31	15.26	15.17	14.64	15.37	15.81	15.73	15.46	15.72	15.47	14.62
Gain 15deg (dBi)											
E1(XZ)波瓣宽度	53.00	117.00	53.00	54.00	117.00	117.00	62.00	115.00	81.00	77.00	112.00
E1(XZ)前后比	1.79	1.85	1.69	1.84	2.12	2.05	1.78	1.92	1.92	1.86	2.38
E2(YZ)波瓣宽度	34.00	33.00	31.00	33.00	35.00	36.00	36.00	39.00	40.00	45.00	86.00
E2(YZ)前后比	2.10	2.75	2.75	2.48	2.20	1.96	2.01	1.84	1.74	1.59	1.58
最大增益处轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
仰角10度最差(大)轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Hc(XY)波瓣宽度	26.00	25.00	26.00	26.00	25.00	26.00	26.00	25.00	25.00	25.00	24.00
Hc(XY)前后比	4.54	4.31	4.22	3.88	3.87	3.75	3.97	4.38	4.33	4.45	5.36



Empty											

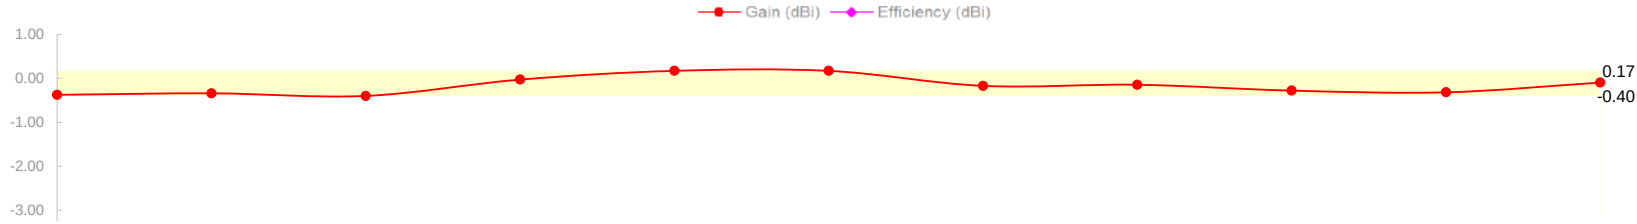
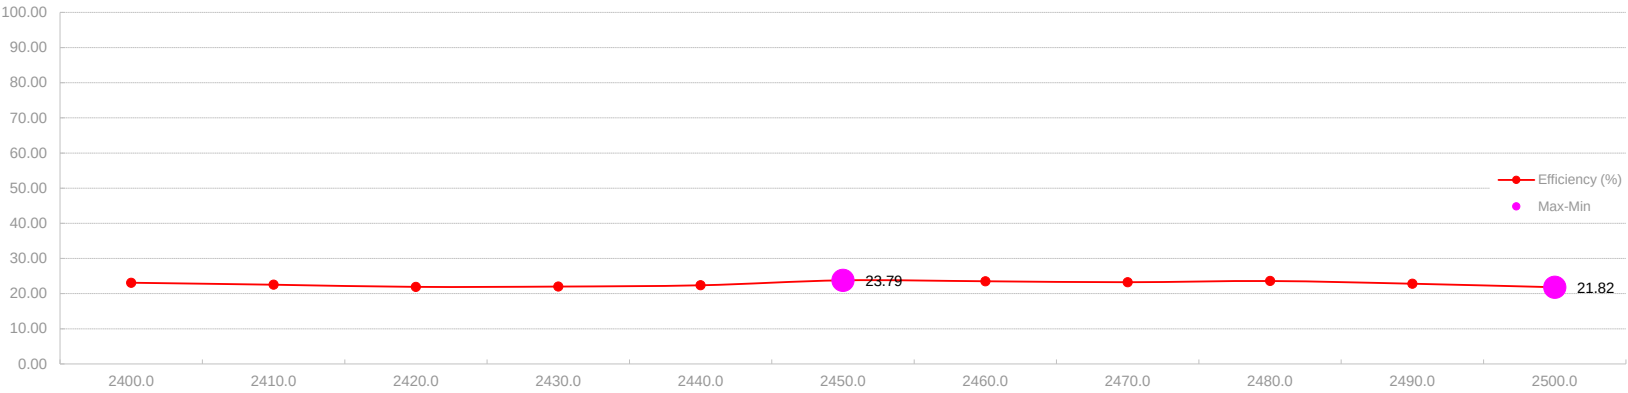


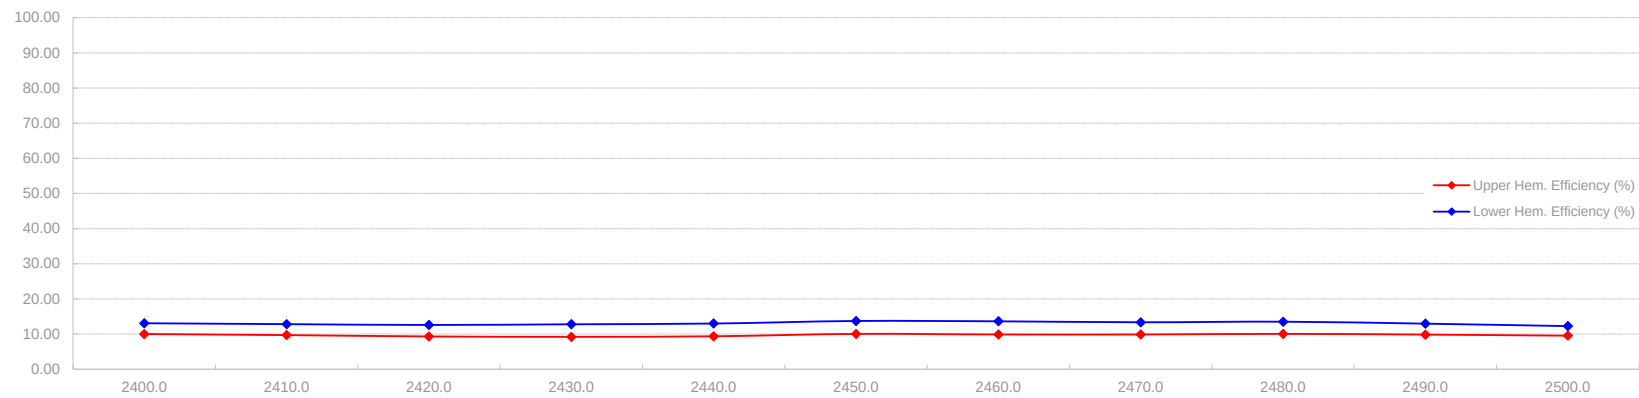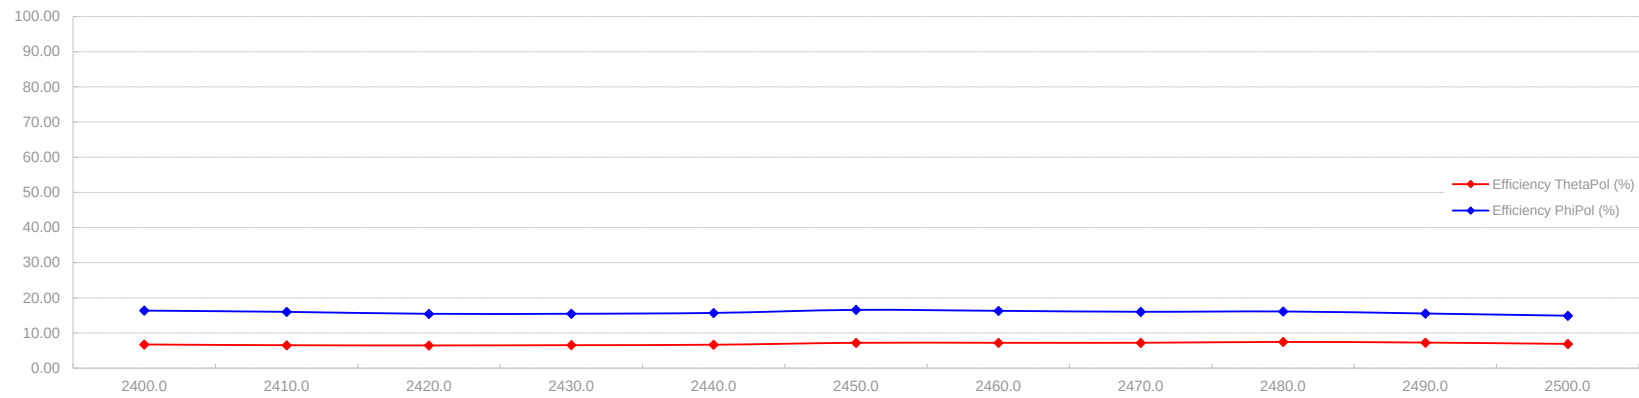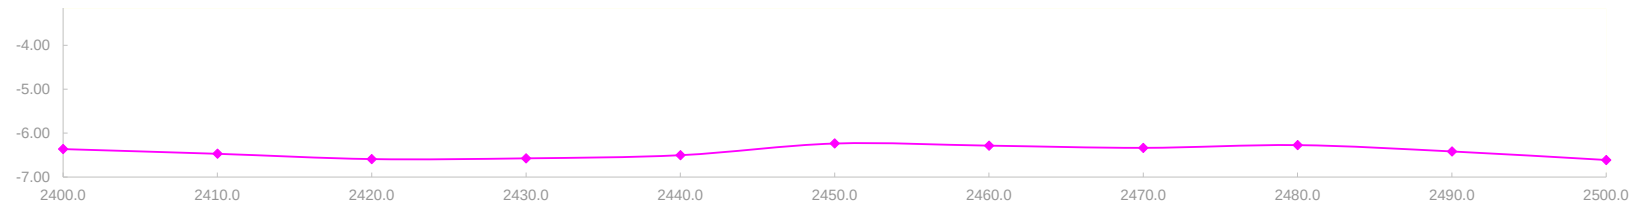

VSWR

SMISH

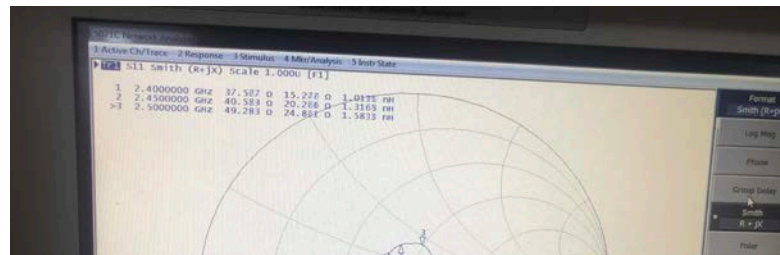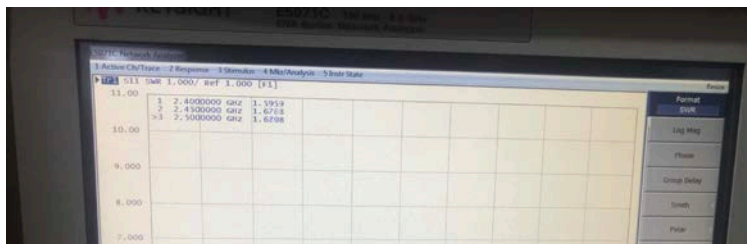

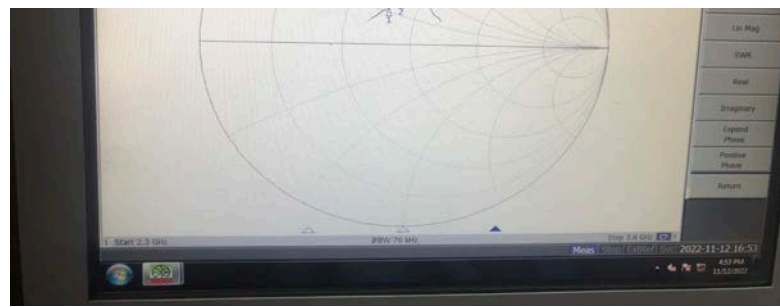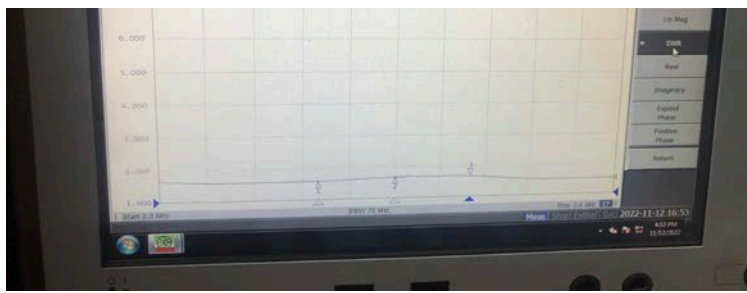

天线实物图

