




Appendix A. Test of AC Power Line Conducted Emission

Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 9

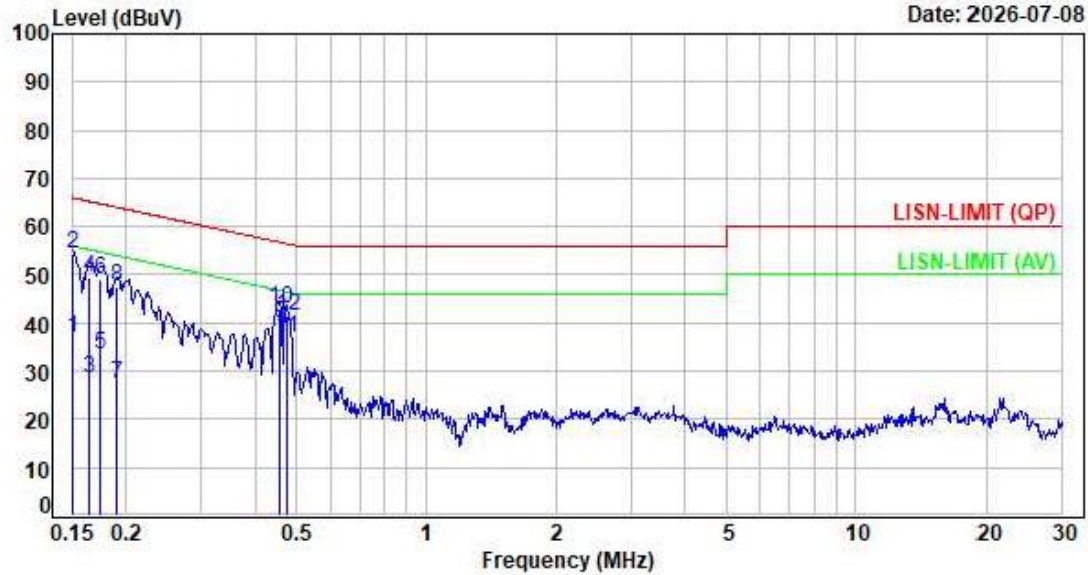

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1505	9.77	26.95	36.72	55.97	-19.25	Average	P
2	0.1505	9.77	44.50	54.27	65.97	-11.70	QP	P
3	0.1644	9.77	18.57	28.34	55.24	-26.90	Average	P
4	0.1644	9.77	39.65	49.42	65.24	-15.82	QP	P
5	0.1736	9.78	23.70	33.48	54.79	-21.31	Average	P
6	0.1736	9.78	39.12	48.90	64.79	-15.89	QP	P
7	0.1898	9.78	17.45	27.23	54.04	-26.81	Average	P
8	0.1898	9.78	37.89	47.67	64.04	-16.37	QP	P
9	0.4556	9.77	30.16	39.93	46.77	-6.84	Average	P
10	0.4556	9.77	33.36	43.13	56.77	-13.64	QP	P
11	0.4744	9.77	26.93	36.70	46.44	-9.74	Average	P
12	0.4744	9.77	31.77	41.54	56.44	-14.90	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11bel60 CH207 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 10

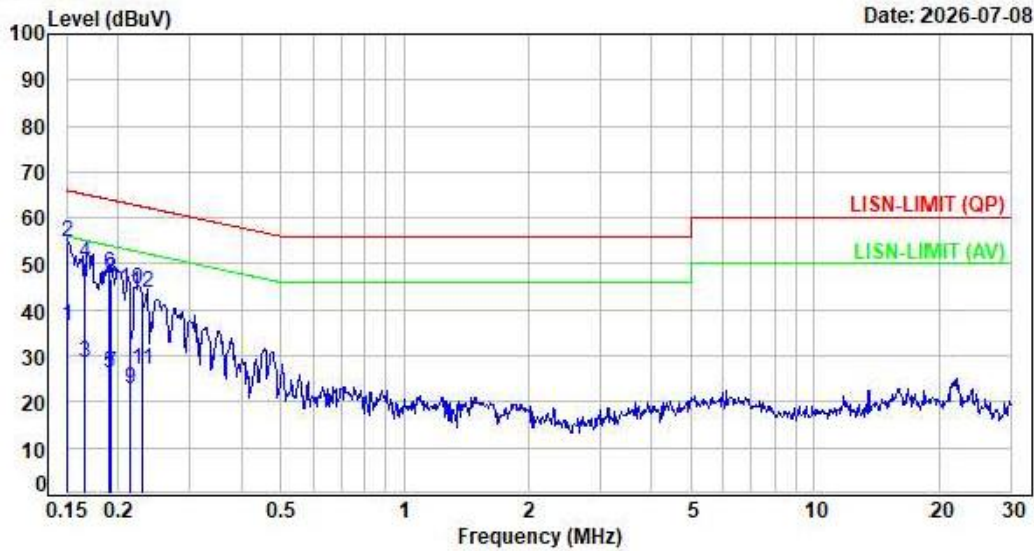

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1501	9.78	26.70	36.48	56.00	-19.52	Average	P
2	0.1501	9.78	45.11	54.89	66.00	-11.11	QP	P
3	0.1652	9.78	18.57	28.35	55.20	-26.85	Average	P
4	0.1652	9.78	40.44	50.22	65.20	-14.98	QP	P
5	0.1906	9.79	16.59	26.38	54.01	-27.63	Average	P
6	0.1906	9.79	37.99	47.78	64.01	-16.23	QP	P
7	0.1929	9.79	16.40	26.19	53.91	-27.72	Average	P
8	0.1929	9.79	36.87	46.66	63.91	-17.25	QP	P
9	0.2151	9.79	13.18	22.97	53.01	-30.04	Average	P
10	0.2151	9.79	34.61	44.40	63.01	-18.61	QP	P
11	0.2283	9.79	17.23	27.02	52.51	-25.49	Average	P
12	0.2283	9.79	33.89	43.68	62.51	-18.83	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss