





Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 39

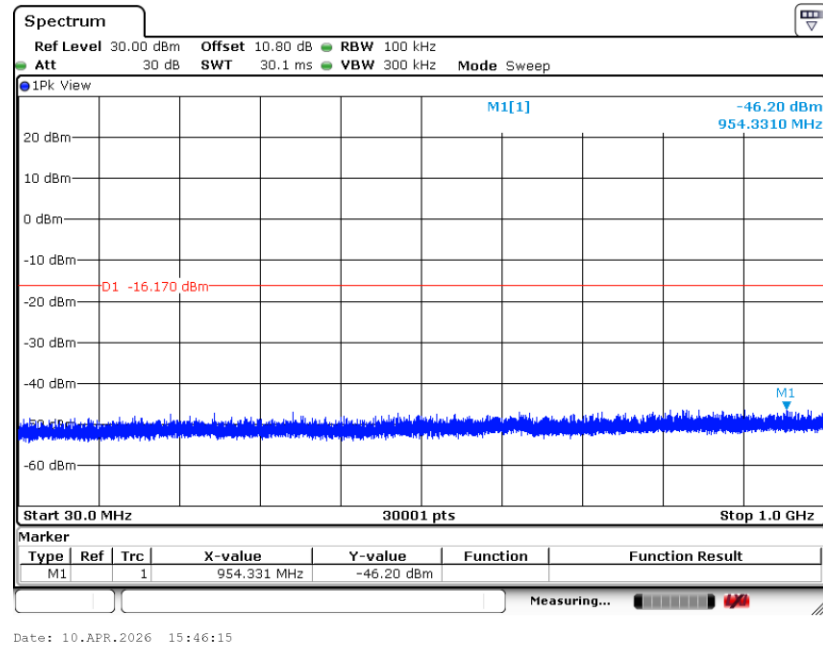

Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 39

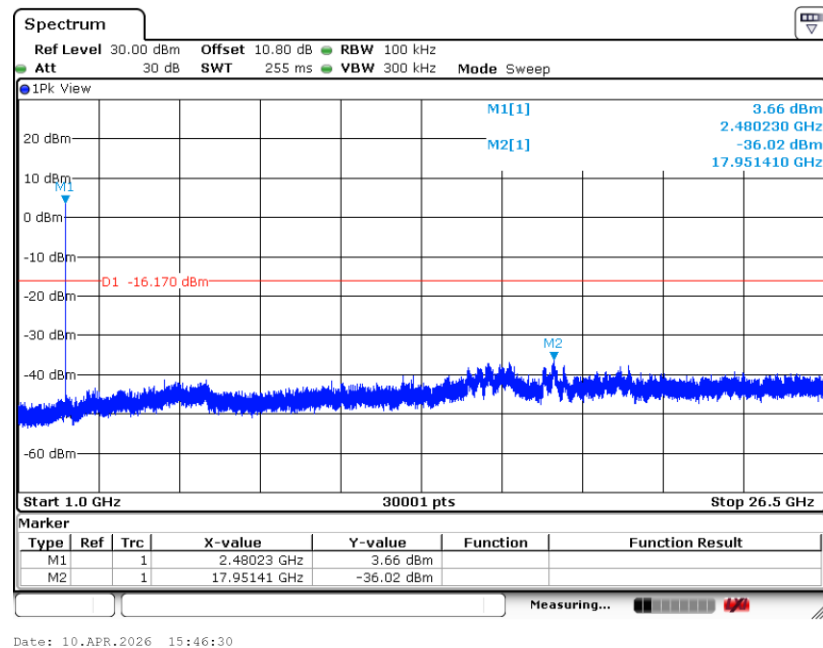

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

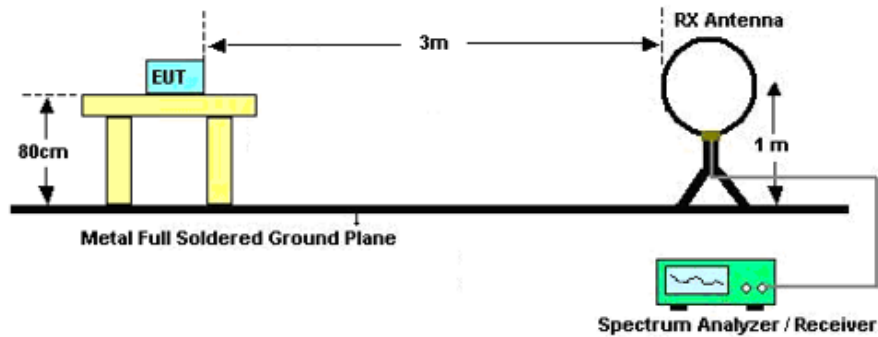

For radiated emissions from 30MHz to 1GHz

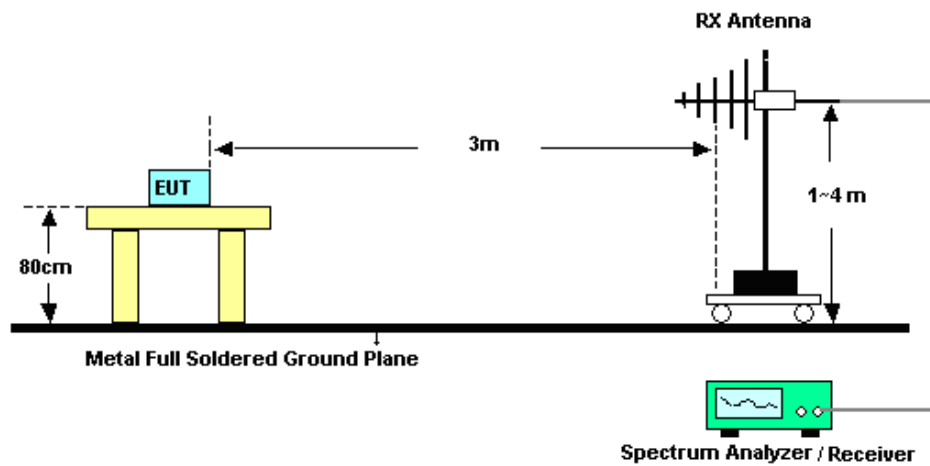

For radiated emissions above 1GHz

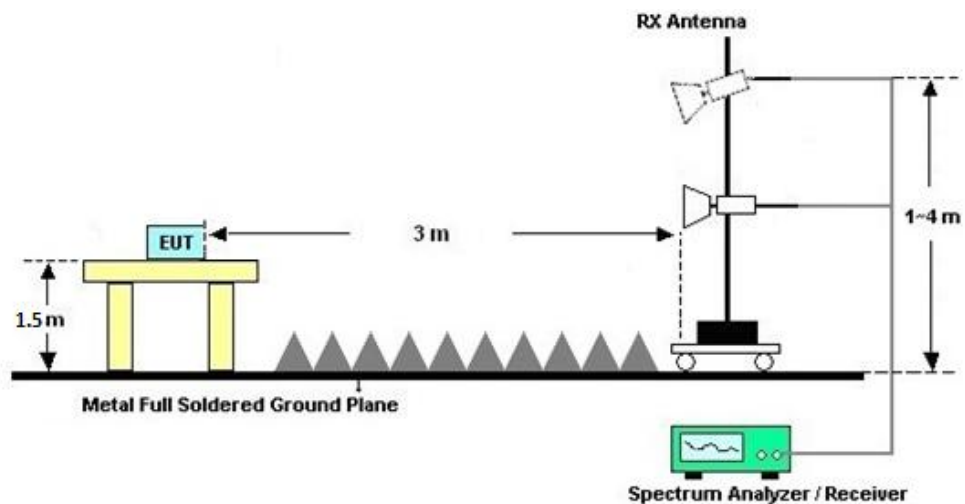



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

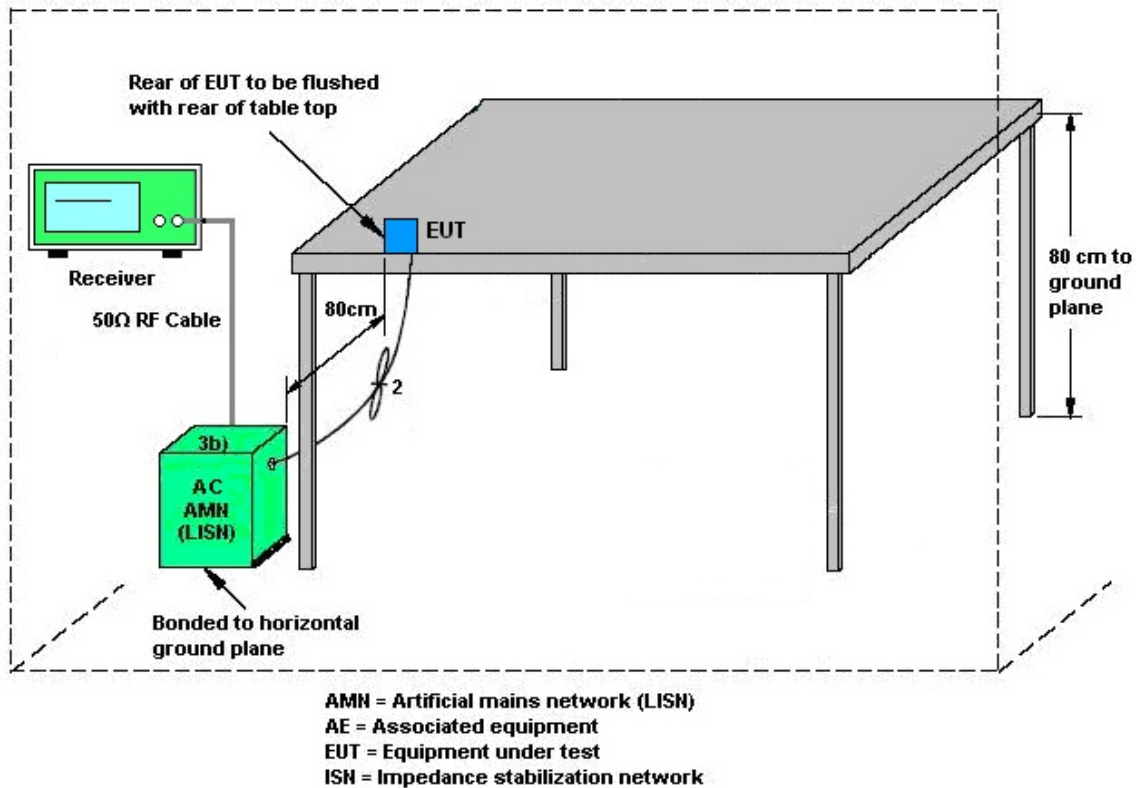

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Apr. 30, 2026	Jul. 02, 2026	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Apr. 30, 2026	Dec. 24, 2026	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Dec. 23, 2025	Apr. 30, 2026	Dec. 22, 2027	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Apr. 30, 2026	Jul. 04, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Apr. 30, 2026	Jul. 03, 2026	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Apr. 30, 2026	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2025	Apr. 30, 2026	Dec. 24, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Apr. 30, 2026	Oct. 12, 2026	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 13, 2025	Apr. 30, 2026	Oct. 12, 2026	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 13, 2025	Apr. 30, 2026	Oct. 12, 2026	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 30, 2026	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 30, 2026	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Apr. 09, 2026	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Apr. 09, 2026	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.14, 2025	Apr. 09, 2026	Dec. 13, 2026	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Mar. 25, 2026	Apr. 10, 2026	Mar. 24, 2027	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Apr. 10, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.13, 2025	Apr. 10, 2026	Oct. 12, 2026	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Mar. 29, 2026	Apr. 10, 2026	Mar. 28, 2027	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2026/4/10	Relative Humidity:	51~54	%

Ant.1

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.043	0.684	0.50	Pass
BLE	125kbps	1	19	2440	1.045	0.686	0.50	Pass
BLE	125kbps	1	39	2480	1.045	0.686	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	7.66	6f	30.00	0.20	7.86	36.00	Pass
BLE	125kbps	1	19	2440	8.26	6f	30.00	0.20	8.46	36.00	Pass
BLE	125kbps	1	39	2480	8.28	6f	30.00	0.20	8.48	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	0.12	7.60	6f	30.00	0.20	7.80	36.00	Pass
BLE	125kbps	1	19	2440	0.12	8.20	6f	30.00	0.20	8.40	36.00	Pass
BLE	125kbps	1	39	2480	0.12	8.20	6f	30.00	0.20	8.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125kbps	1	0	2402	4.50	1.62	0.20	8.00	Pass
BLE	125kbps	1	19	2440	5.07	2.17	0.20	8.00	Pass
BLE	125kbps	1	39	2480	5.15	2.24	0.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA

Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	7.55	6f	30.00	0.20	7.75	36.00	Pass
BLE	500kbps	1	19	2440	8.12	6f	30.00	0.20	8.32	36.00	Pass
BLE	500kbps	1	39	2480	8.14	6f	30.00	0.20	8.34	36.00	Pass

TEST RESULTS DATA

Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	0.43	7.50	6f	30.00	0.20	7.70	36.00	Pass
BLE	500kbps	1	19	2440	0.43	8.10	6f	30.00	0.20	8.30	36.00	Pass
BLE	500kbps	1	39	2480	0.43	8.10	6f	30.00	0.20	8.30	36.00	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.56	6f	30.00	0.20	7.76	36.00	Pass
BLE	1Mbps	1	19	2440	8.15	6f	30.00	0.20	8.35	36.00	Pass
BLE	1Mbps	1	39	2480	8.14	6f	30.00	0.20	8.34	36.00	Pass

TEST RESULTS DATA**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.72	7.50	6f	30.00	0.20	7.70	36.00	Pass
BLE	1Mbps	1	19	2440	0.72	8.10	6f	30.00	0.20	8.30	36.00	Pass
BLE	1Mbps	1	39	2480	0.72	8.10	6f	30.00	0.20	8.30	36.00	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.038	1.244	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.200	0.50	Pass
BLE	2Mbps	1	39	2480	2.034	1.244	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.65	6f	30.00	0.20	7.85	36.00	Pass
BLE	2Mbps	1	19	2440	8.24	6f	30.00	0.20	8.44	36.00	Pass
BLE	2Mbps	1	39	2480	8.28	6f	30.00	0.20	8.48	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.45	7.60	6f	30.00	0.20	7.80	36.00	Pass
BLE	2Mbps	1	19	2440	2.45	8.20	6f	30.00	0.20	8.40	36.00	Pass
BLE	2Mbps	1	39	2480	2.45	8.20	6f	30.00	0.20	8.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	6.67	-11.59	0.20	8.00	Pass
BLE	2Mbps	1	19	2440	7.24	-10.99	0.20	8.00	Pass
BLE	2Mbps	1	39	2480	7.27	-10.97	0.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Ant.2

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.051	0.686	0.50	Pass
BLE	125kbps	1	19	2440	1.051	0.686	0.50	Pass
BLE	125kbps	1	39	2480	1.047	0.688	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	8.02	5f	30.00	0.20	8.22	36.00	Pass
BLE	125kbps	1	19	2440	7.82	5f	30.00	0.20	8.02	36.00	Pass
BLE	125kbps	1	39	2480	7.11	5f	30.00	0.20	7.31	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	0.12	8.00	5f	30.00	0.20	8.20	36.00	Pass
BLE	125kbps	1	19	2440	0.12	7.80	5f	30.00	0.20	8.00	36.00	Pass
BLE	125kbps	1	39	2480	0.12	7.10	5f	30.00	0.20	7.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125kbps	1	0	2402	5.02	2.12	0.20	8.00	Pass
BLE	125kbps	1	19	2440	4.59	1.65	0.20	8.00	Pass
BLE	125kbps	1	39	2480	3.83	0.94	0.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA

Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	7.93	5f	30.00	0.20	8.13	36.00	Pass
BLE	500kbps	1	19	2440	7.75	5f	30.00	0.20	7.95	36.00	Pass
BLE	500kbps	1	39	2480	7.02	5f	30.00	0.20	7.22	36.00	Pass

TEST RESULTS DATA

Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	0.42	7.90	5f	30.00	0.20	8.10	36.00	Pass
BLE	500kbps	1	19	2440	0.42	7.70	5f	30.00	0.20	7.90	36.00	Pass
BLE	500kbps	1	39	2480	0.42	7.00	5f	30.00	0.20	7.20	36.00	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.92	5f	30.00	0.20	8.12	36.00	Pass
BLE	1Mbps	1	19	2440	7.75	5f	30.00	0.20	7.95	36.00	Pass
BLE	1Mbps	1	39	2480	7.05	5f	30.00	0.20	7.25	36.00	Pass

TEST RESULTS DATA**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.72	7.90	5f	30.00	0.20	8.10	36.00	Pass
BLE	1Mbps	1	19	2440	0.72	7.70	5f	30.00	0.20	7.90	36.00	Pass
BLE	1Mbps	1	39	2480	0.72	7.00	5f	30.00	0.20	7.20	36.00	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.038	1.248	0.50	Pass
BLE	2Mbps	1	19	2440	2.042	1.248	0.50	Pass
BLE	2Mbps	1	39	2480	2.042	1.244	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.03	5f	30.00	0.20	8.23	36.00	Pass
BLE	2Mbps	1	19	2440	7.85	5f	30.00	0.20	8.05	36.00	Pass
BLE	2Mbps	1	39	2480	7.12	5f	30.00	0.20	7.32	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.45	8.00	5f	30.00	0.20	8.20	36.00	Pass
BLE	2Mbps	1	19	2440	2.45	7.80	5f	30.00	0.20	8.00	36.00	Pass
BLE	2Mbps	1	39	2480	2.45	7.10	5f	30.00	0.20	7.30	36.00	Pass


TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	7.06	-11.21	0.20	8.00	Pass
BLE	2Mbps	1	19	2440	6.60	-11.63	0.20	8.00	Pass
BLE	2Mbps	1	39	2480	5.88	-12.37	0.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

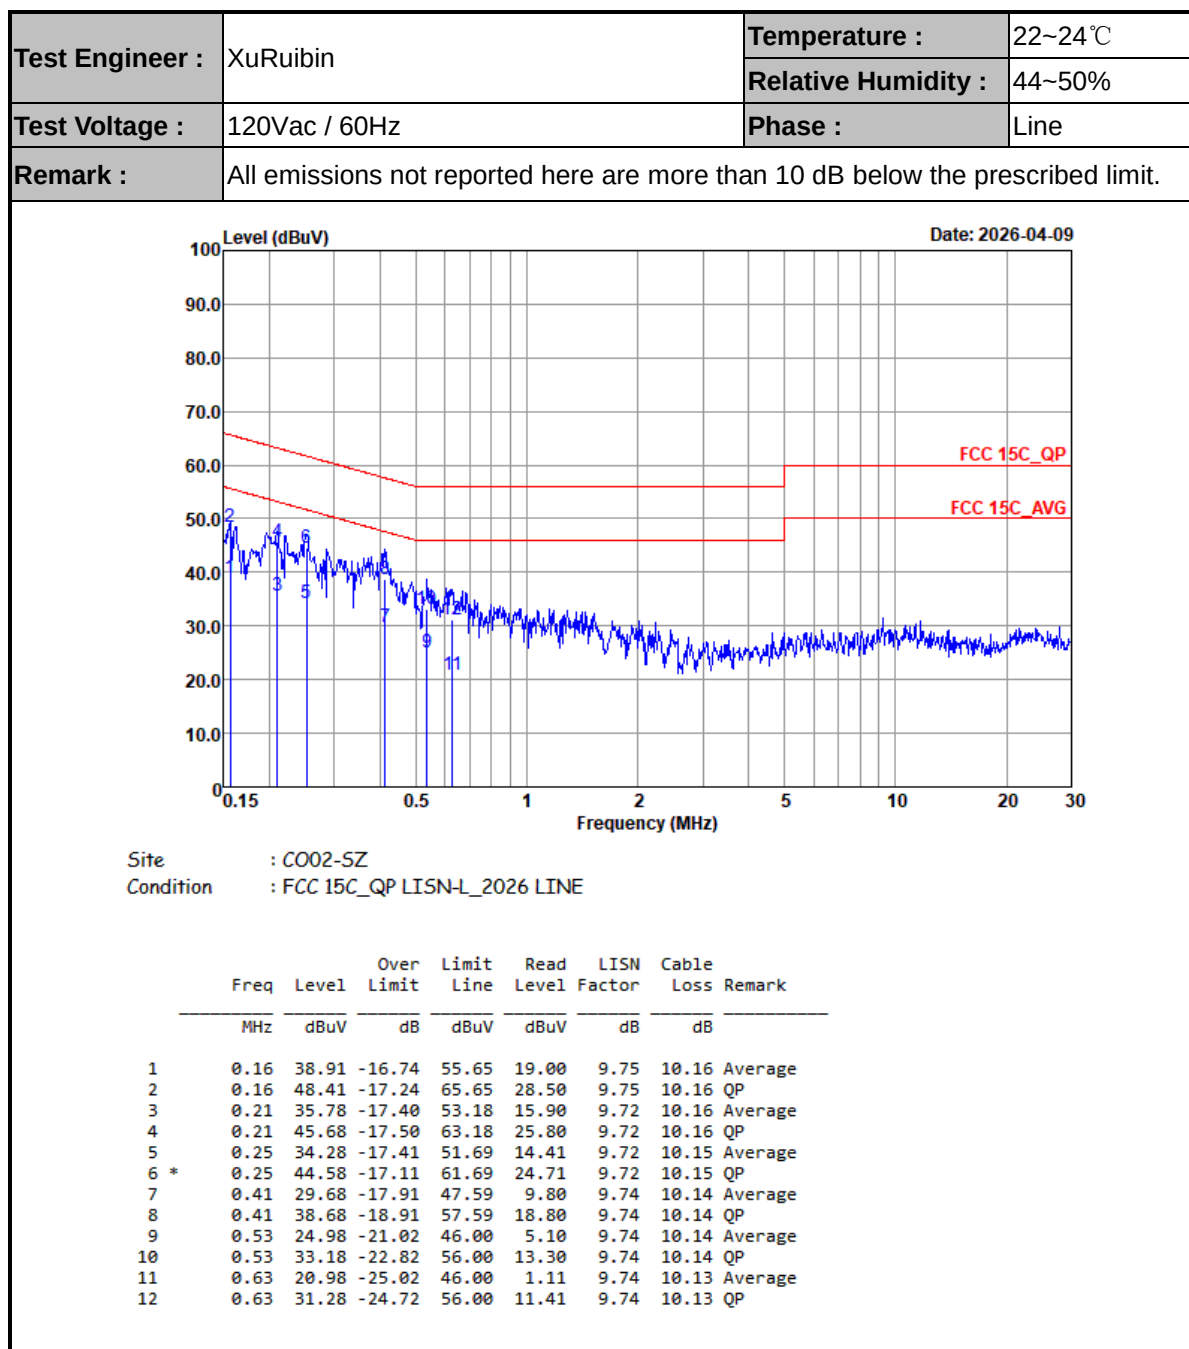



Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

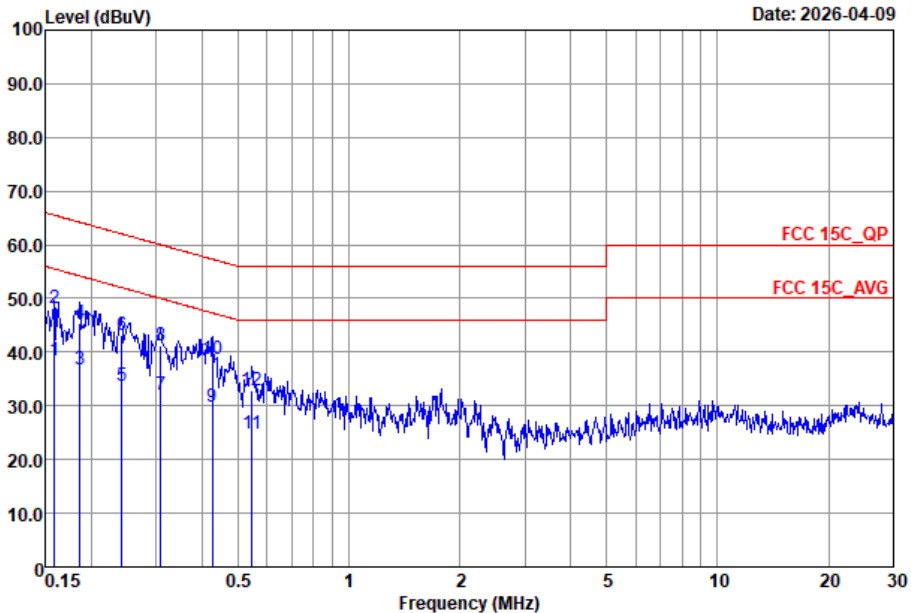

Site : CO02-SZ
Condition : FCC 15C_QP LISN-N_2026 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	38.55	-16.97	55.52	18.60	9.79	10.16	Average
2 *	0.16	48.15	-17.37	65.52	28.20	9.79	10.16	QP
3	0.19	36.84	-17.36	54.20	16.90	9.78	10.16	Average
4	0.19	45.44	-18.76	64.20	25.50	9.78	10.16	QP
5	0.24	33.84	-18.20	52.04	13.90	9.78	10.16	Average
6	0.24	43.24	-18.80	62.04	23.30	9.78	10.16	QP
7	0.31	32.03	-17.99	50.02	12.10	9.78	10.15	Average
8	0.31	41.23	-18.79	60.02	21.30	9.78	10.15	QP
9	0.43	29.90	-17.43	47.33	10.01	9.75	10.14	Average
10	0.43	38.70	-18.63	57.33	18.81	9.75	10.14	QP
11	0.55	24.78	-21.22	46.00	4.90	9.74	10.14	Average
12	0.55	32.98	-23.02	56.00	13.10	9.74	10.14	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	LiangPing Zhou	Relative Humidity :	50%
		Temperature :	20~22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE	00	2402	125Kbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE	19	2440	125Kbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE	39	2480	125Kbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 8	2400-2483.5	1	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 9	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 13	2400-2483.5	2	Bluetooth-LE	00	2402	125Kbps	-	-
Mode 14	2400-2483.5	2	Bluetooth-LE	19	2440	125Kbps	-	-
Mode 15	2400-2483.5	2	Bluetooth-LE	39	2480	125Kbps	-	-
Mode 16	2400-2483.5	2	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 17	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 18	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 41	2400-2483.5	1	Bluetooth-LE	00	2402	125Kbps	-	LF





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
4	Bluetooth-LE	00	2383.92	42.99	54.00	-11.01	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	52.88	54.00	-1.12	H	Average	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	4880.00	51.89	54.00	-2.11	H	Average	Pass	Harmonic
6	Bluetooth-LE	39	2485.36	43.65	54.00	-10.35	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	4960.00	52.59	54.00	-1.41	H	Average	Pass	Harmonic
7	Bluetooth-LE	00	2366.81	42.90	54.00	-11.10	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	51.88	54.00	-2.12	H	Average	Pass	Harmonic
8	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	4880.00	51.84	54.00	-2.16	H	Average	Pass	Harmonic
9	Bluetooth-LE	39	2483.52	44.64	54.00	-9.36	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	4960.00	51.52	54.00	-2.48	H	Average	Pass	Harmonic
13	Bluetooth-LE	00	2375.84	42.78	54.00	-11.22	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	43.77	74.00	-30.23	H	Peak	Pass	Harmonic
14	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.36	74.00	-28.64	V	Peak	Pass	Harmonic
15	Bluetooth-LE	39	2499.68	43.21	54.00	-10.79	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	44.06	74.00	-29.94	H	Peak	Pass	Harmonic
16	Bluetooth-LE	00	2386.86	42.69	54.00	-11.31	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	43.23	74.00	-30.77	H	Peak	Pass	Harmonic
17	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	44.80	74.00	-29.20	V	Peak	Pass	Harmonic
18	Bluetooth-LE	39	2483.52	43.48	54.00	-10.52	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	45.25	74.00	-28.75	H	Peak	Pass	Harmonic
41	Bluetooth-LE	00	30	30.70	40	-6.30	V	Peak	Pass	LF





Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2332.58</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>46.42</td><td>32.10</td><td>7.74</td><td>32.27</td><td>152</td><td>291 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2332.58	53.99	74.00	-20.01	46.42	32.10	7.74	32.27	152	291 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>103.58</td><td>-----</td><td>-----</td><td>95.74</td><td>32.22</td><td>7.86</td><td>32.24</td><td>152</td><td>291 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.58	-----	-----	95.74	32.22	7.86	32.24	152	291 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2332.58	53.99	74.00	-20.01	46.42	32.10	7.74	32.27	152	291 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	103.58	-----	-----	95.74	32.22	7.86	32.24	152	291 PEAK																																																																										
Avg	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2383.92</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>35.22</td><td>32.19</td><td>7.83</td><td>32.25</td><td>152</td><td>291 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2383.92	42.99	54.00	-11.01	35.22	32.19	7.83	32.25	152	291 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>102.29</td><td>-----</td><td>-----</td><td>94.45</td><td>32.22</td><td>7.86</td><td>32.24</td><td>152</td><td>291 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.29	-----	-----	94.45	32.22	7.86	32.24	152	291 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2383.92	42.99	54.00	-11.01	35.22	32.19	7.83	32.25	152	291 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	102.29	-----	-----	94.45	32.22	7.86	32.24	152	291 AVERAGE																																																																										

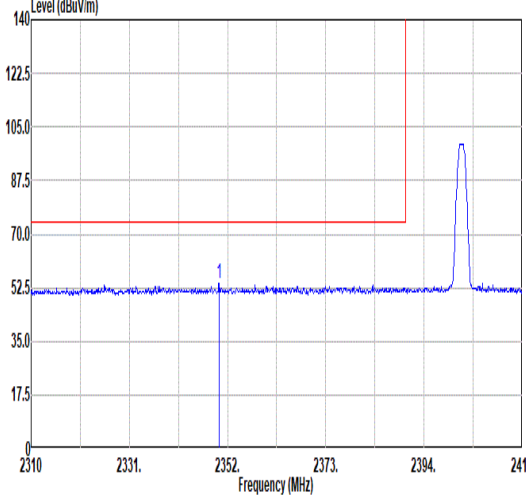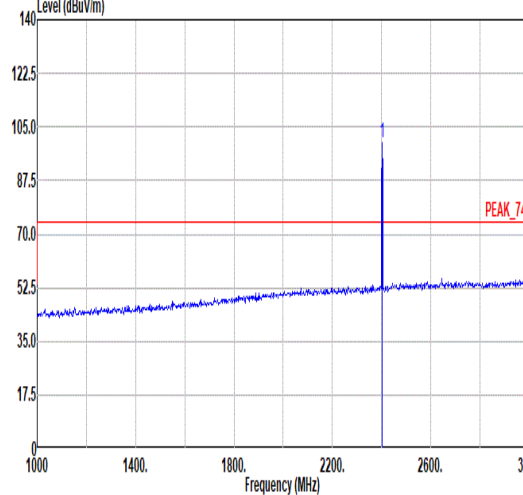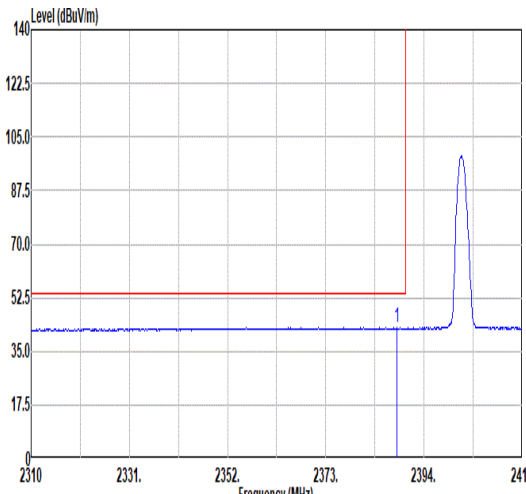
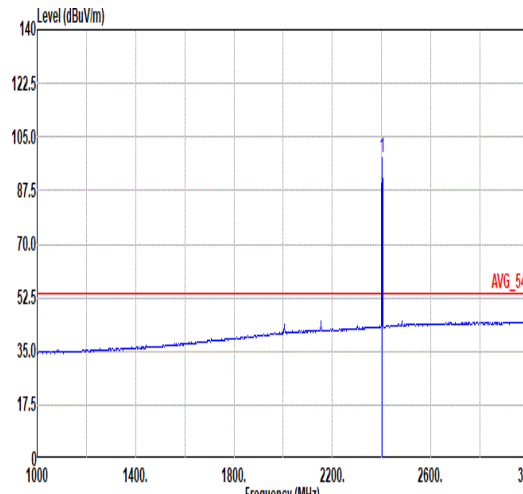


Mode	4																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2350.22</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>46.07</td><td>32.13</td><td>7.77</td><td>32.26</td><td>288</td><td>354</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2350.22	53.71	74.00	-20.29	46.07	32.13	7.77	32.26	288	354	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.76</td><td>-----</td><td>-----</td><td>91.92</td><td>32.22</td><td>7.86</td><td>32.24</td><td>288</td><td>354</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.76	-----	-----	91.92	32.22	7.86	32.24	288	354
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2350.22	53.71	74.00	-20.29	46.07	32.13	7.77	32.26	288	354	PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2402.00	99.76	-----	-----	91.92	32.22	7.86	32.24	288	354	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.23</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>34.97</td><td>32.20</td><td>7.84</td><td>32.25</td><td>288</td><td>354</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.23	42.76	54.00	-11.24	34.97	32.20	7.84	32.25	288	354	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.52</td><td>-----</td><td>-----</td><td>90.68</td><td>32.22</td><td>7.86</td><td>32.24</td><td>288</td><td>354</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.52	-----	-----	90.68	32.22	7.86	32.24	288	354
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2388.23	42.76	54.00	-11.24	34.97	32.20	7.84	32.25	288	354	AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2402.00	98.52	-----	-----	90.68	32.22	7.86	32.24	288	354	AVERAGE																																																																																			



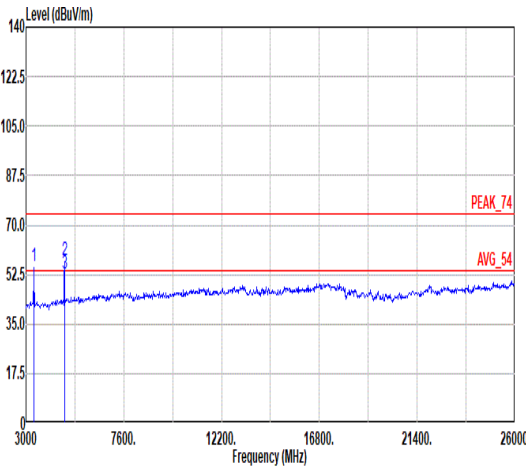
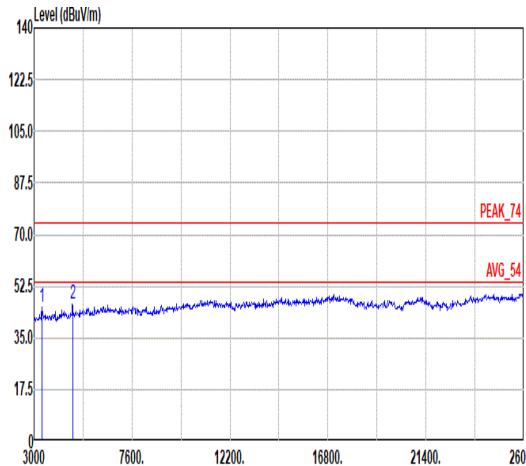


Mode	4																																																																																																																															
	Harmonic																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3360.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>76.90</td><td>32.87</td><td>9.31</td><td>63.64</td><td>258</td><td>181</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>57.78</td><td>74.00</td><td>-16.22</td><td>77.50</td><td>34.08</td><td>11.00</td><td>64.80</td><td>108</td><td>278</td><td>Peak</td></tr><tr><td>3</td><td>4804.00</td><td>52.88</td><td>54.00</td><td>-1.12</td><td>72.60</td><td>34.08</td><td>11.00</td><td>64.80</td><td>108</td><td>278</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3360.00	55.44	74.00	-18.56	76.90	32.87	9.31	63.64	258	181	Peak	2	4804.00	57.78	74.00	-16.22	77.50	34.08	11.00	64.80	108	278	Peak	3	4804.00	52.88	54.00	-1.12	72.60	34.08	11.00	64.80	108	278	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3360.00</td><td>45.29</td><td>74.00</td><td>-28.71</td><td>66.75</td><td>32.87</td><td>9.31</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>46.46</td><td>74.00</td><td>-27.54</td><td>66.18</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3360.00	45.29	74.00	-28.71	66.75	32.87	9.31	63.64	---	---	Peak	2	4804.00	46.46	74.00	-27.54	66.18	34.08	11.00	64.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																							
1	3360.00	55.44	74.00	-18.56	76.90	32.87	9.31	63.64	258	181	Peak																																																																																																																					
2	4804.00	57.78	74.00	-16.22	77.50	34.08	11.00	64.80	108	278	Peak																																																																																																																					
3	4804.00	52.88	54.00	-1.12	72.60	34.08	11.00	64.80	108	278	Average																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																							
1	3360.00	45.29	74.00	-28.71	66.75	32.87	9.31	63.64	---	---	Peak																																																																																																																					
2	4804.00	46.46	74.00	-27.54	66.18	34.08	11.00	64.80	---	---	Peak																																																																																																																					



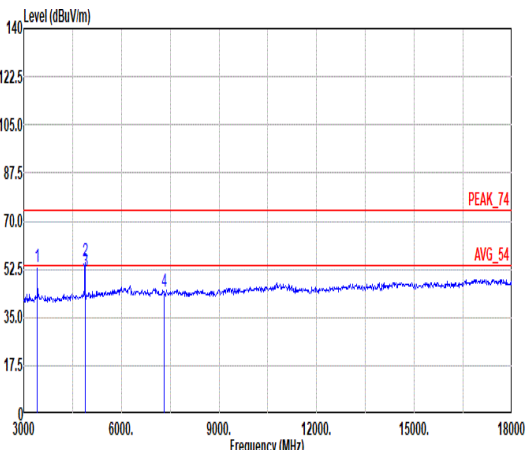
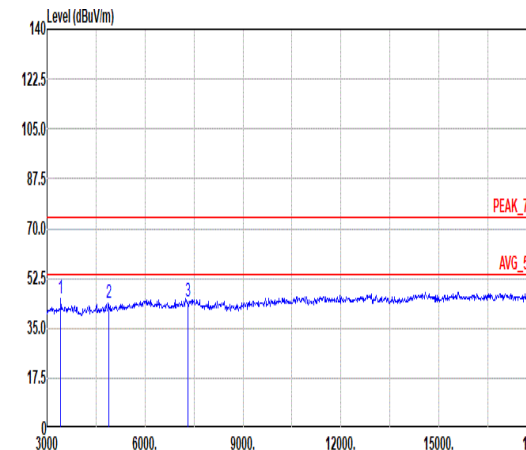


Mode	5																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3420.00</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>74.88</td><td>32.88</td><td>9.38</td><td>63.58</td><td>258</td><td>182</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>75.44</td><td>34.13</td><td>10.96</td><td>64.80</td><td>105</td><td>277</td><td>Peak</td></tr><tr><td>3</td><td>4880.00</td><td>51.89</td><td>54.00</td><td>-2.11</td><td>71.60</td><td>34.13</td><td>10.96</td><td>64.80</td><td>105</td><td>277</td><td>Average</td></tr><tr><td>4</td><td>7320.00</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>59.52</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3420.00	53.56	74.00	-20.44	74.88	32.88	9.38	63.58	258	182	Peak	2	4880.00	55.73	74.00	-18.27	75.44	34.13	10.96	64.80	105	277	Peak	3	4880.00	51.89	54.00	-2.11	71.60	34.13	10.96	64.80	105	277	Average	4	7320.00	44.12	74.00	-29.88	59.52	35.57	13.55	64.52	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3420.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>66.51</td><td>32.88</td><td>9.38</td><td>63.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>63.80</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>59.82</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3420.00	45.19	74.00	-28.81	66.51	32.88	9.38	63.58	---	---	Peak	2	4880.00	44.09	74.00	-29.91	63.80	34.13	10.96	64.80	---	---	Peak	3	7320.00	44.42	74.00	-29.58	59.82	35.57	13.55	64.52	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																														
1	3420.00	53.56	74.00	-20.44	74.88	32.88	9.38	63.58	258	182	Peak																																																																																																																																												
2	4880.00	55.73	74.00	-18.27	75.44	34.13	10.96	64.80	105	277	Peak																																																																																																																																												
3	4880.00	51.89	54.00	-2.11	71.60	34.13	10.96	64.80	105	277	Average																																																																																																																																												
4	7320.00	44.12	74.00	-29.88	59.52	35.57	13.55	64.52	---	---	Peak																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																														
1	3420.00	45.19	74.00	-28.81	66.51	32.88	9.38	63.58	---	---	Peak																																																																																																																																												
2	4880.00	44.09	74.00	-29.91	63.80	34.13	10.96	64.80	---	---	Peak																																																																																																																																												
3	7320.00	44.42	74.00	-29.58	59.82	35.57	13.55	64.52	---	---	Peak																																																																																																																																												

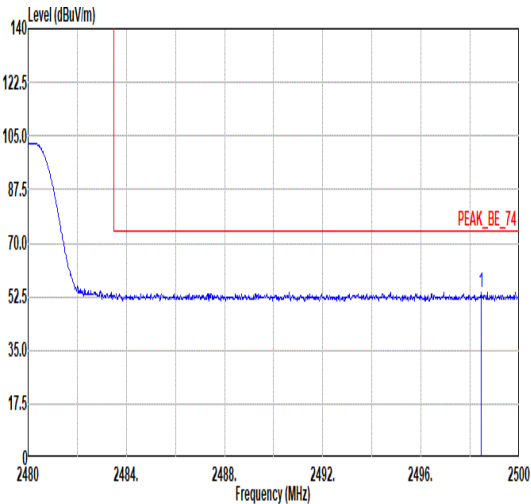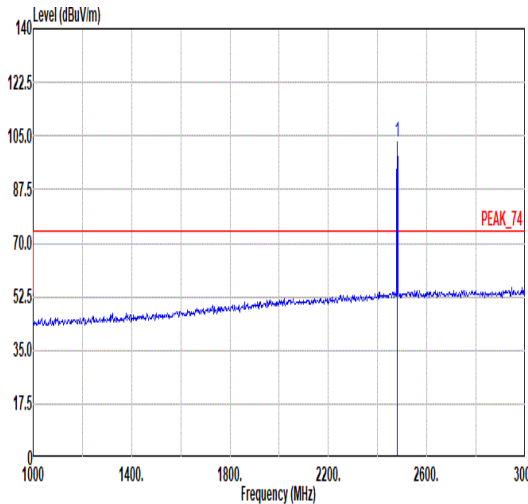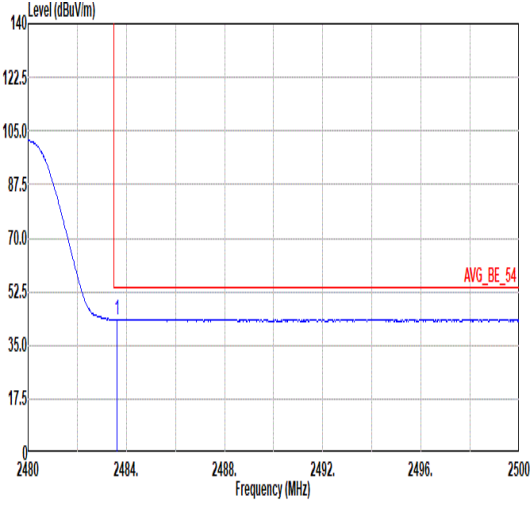
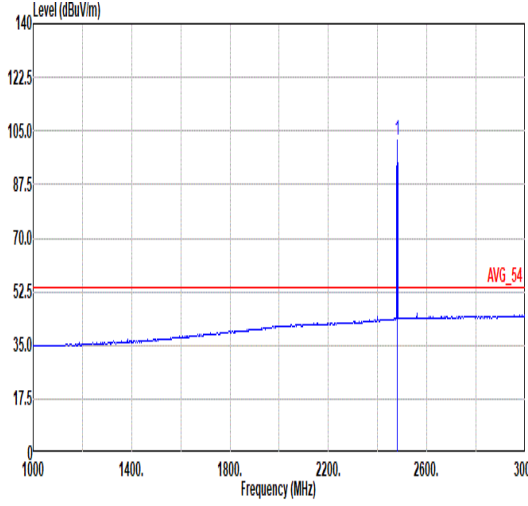


Mode	6																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal										Fundamental																																																																																			
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.46</td><td>54.07</td><td>74.00</td><td>-19.93</td><td>45.86</td><td>32.40</td><td>8.01</td><td>32.20</td><td>100</td><td>78</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2498.46	54.07	74.00	-19.93	45.86	32.40	8.01	32.20	100	78	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.95</td><td>-----</td><td>-----</td><td>94.82</td><td>32.36</td><td>7.98</td><td>32.21</td><td>100</td><td>78</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.95	-----	-----	94.82	32.36	7.98	32.21	100	78
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2498.46	54.07	74.00	-19.93	45.86	32.40	8.01	32.20	100	78	PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2480.00	102.95	-----	-----	94.82	32.36	7.98	32.21	100	78	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>35.38</td><td>32.37</td><td>7.99</td><td>32.21</td><td>100</td><td>78</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	43.53	54.00	-10.47	35.38	32.37	7.99	32.21	100	78	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.77</td><td>-----</td><td>-----</td><td>93.64</td><td>32.36</td><td>7.98</td><td>32.21</td><td>100</td><td>78</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.77	-----	-----	93.64	32.36	7.98	32.21	100	78
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2483.62	43.53	54.00	-10.47	35.38	32.37	7.99	32.21	100	78	AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2480.00	101.77	-----	-----	93.64	32.36	7.98	32.21	100	78	AVERAGE																																																																																			

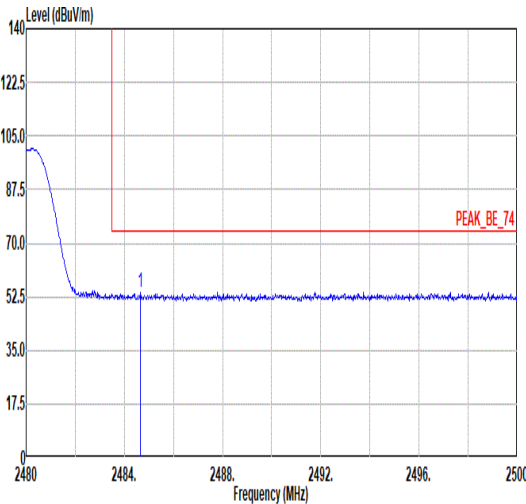
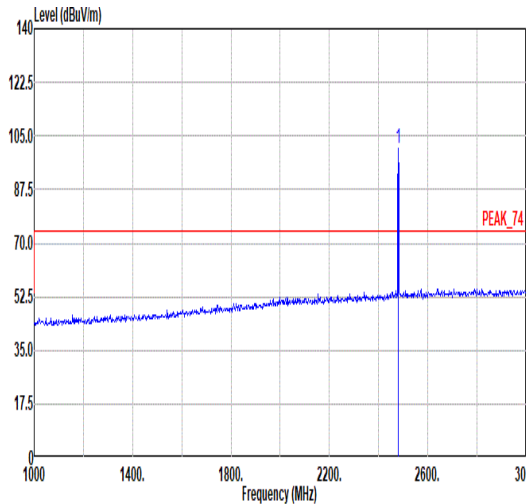
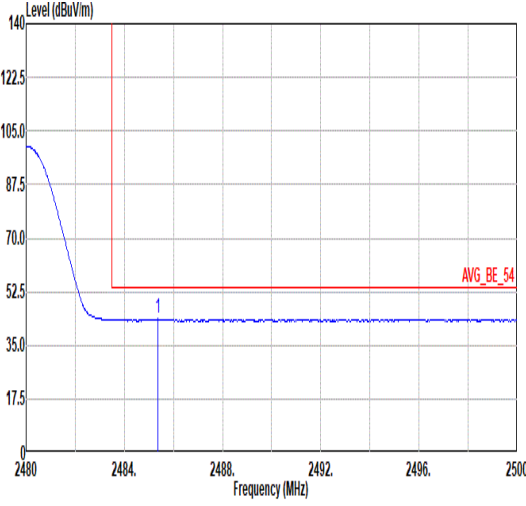
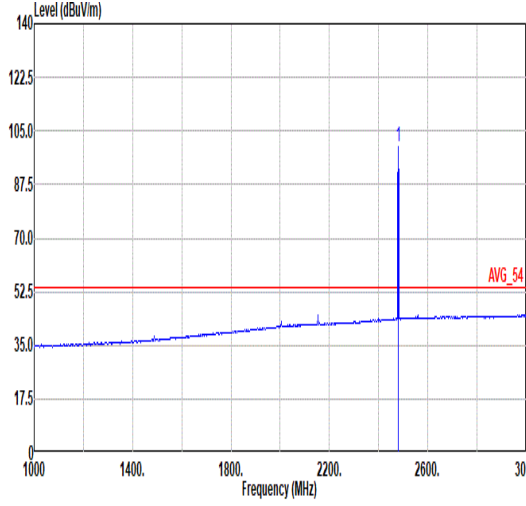


Mode	6																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.64</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>45.91</td><td>32.37</td><td>7.99</td><td>32.21</td><td>275 173 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.64	54.06	74.00	-19.94	45.91	32.37	7.99	32.21	275 173 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.12</td><td>-----</td><td>-----</td><td>92.99</td><td>32.36</td><td>7.98</td><td>32.21</td><td>275 173 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.12	-----	-----	92.99	32.36	7.98	32.21
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.64	54.06	74.00	-19.94	45.91	32.37	7.99	32.21	275 173 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	101.12	-----	-----	92.99	32.36	7.98	32.21	275 173 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.36</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>35.50</td><td>32.37</td><td>7.99</td><td>32.21</td><td>275 173 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.36	43.65	54.00	-10.35	35.50	32.37	7.99	32.21	275 173 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.87</td><td>-----</td><td>-----</td><td>91.74</td><td>32.36</td><td>7.98</td><td>32.21</td><td>275 173 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.87	-----	-----	91.74	32.36	7.98	32.21
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2485.36	43.65	54.00	-10.35	35.50	32.37	7.99	32.21	275 173 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	99.87	-----	-----	91.74	32.36	7.98	32.21	275 173 AVERAGE																																																																																



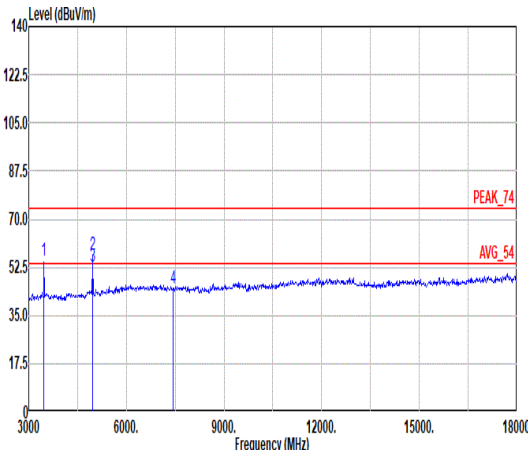
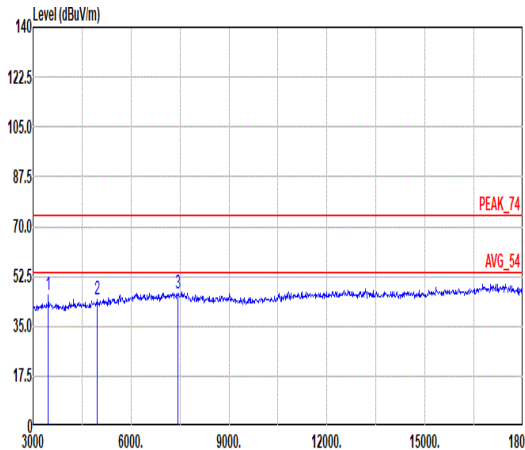


Mode	6																																																																																						
	Harmonic																																																																																						
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																						
ANT	1																																																																																						
Pol.	Horizontal																																																																																						
Peak Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3465.00</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>75.98</td><td>32.89</td><td>9.42</td><td>63.53</td><td>257</td><td>176</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>76.49</td><td>34.18</td><td>10.92</td><td>64.80</td><td>103</td><td>274</td><td>Peak</td></tr><tr><td>3</td><td>4960.00</td><td>52.59</td><td>54.00</td><td>-1.41</td><td>72.29</td><td>34.18</td><td>10.92</td><td>64.80</td><td>103</td><td>274</td><td>Average</td></tr><tr><td>4</td><td>7440.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>59.91</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3465.00	54.76	74.00	-19.24	75.98	32.89	9.42	63.53	257	176	Peak	2	4960.00	56.79	74.00	-17.21	76.49	34.18	10.92	64.80	103	274	Peak	3	4960.00	52.59	54.00	-1.41	72.29	34.18	10.92	64.80	103	274	Average	4	7440.00	44.80	74.00	-29.20	59.91	35.52	13.68	64.31	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	3465.00	54.76	74.00	-19.24	75.98	32.89	9.42	63.53	257	176	Peak																																																																												
2	4960.00	56.79	74.00	-17.21	76.49	34.18	10.92	64.80	103	274	Peak																																																																												
3	4960.00	52.59	54.00	-1.41	72.29	34.18	10.92	64.80	103	274	Average																																																																												
4	7440.00	44.80	74.00	-29.20	59.91	35.52	13.68	64.31	---	---	Peak																																																																												
Pol.	Vertical																																																																																						
Peak Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3465.00</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>67.16</td><td>32.89</td><td>9.42</td><td>63.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>63.96</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>61.40</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3465.00	45.94	74.00	-28.06	67.16	32.89	9.42	63.53	---	---	Peak	2	4960.00	44.26	74.00	-29.74	63.96	34.18	10.92	64.80	---	---	Peak	3	7440.00	46.29	74.00	-27.71	61.40	35.52	13.68	64.31	---	---	Peak												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	3465.00	45.94	74.00	-28.06	67.16	32.89	9.42	63.53	---	---	Peak																																																																												
2	4960.00	44.26	74.00	-29.74	63.96	34.18	10.92	64.80	---	---	Peak																																																																												
3	7440.00	46.29	74.00	-27.71	61.40	35.52	13.68	64.31	---	---	Peak																																																																												

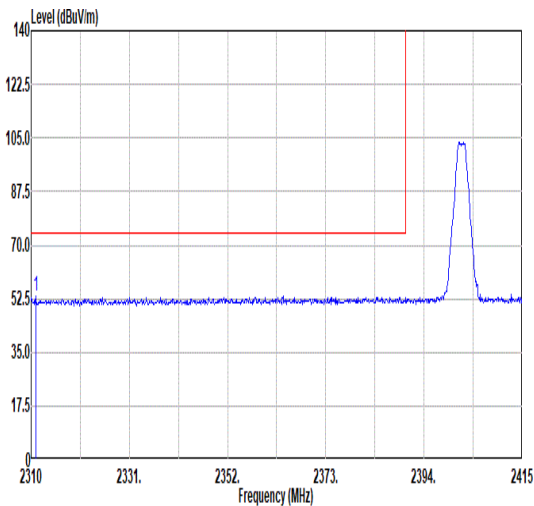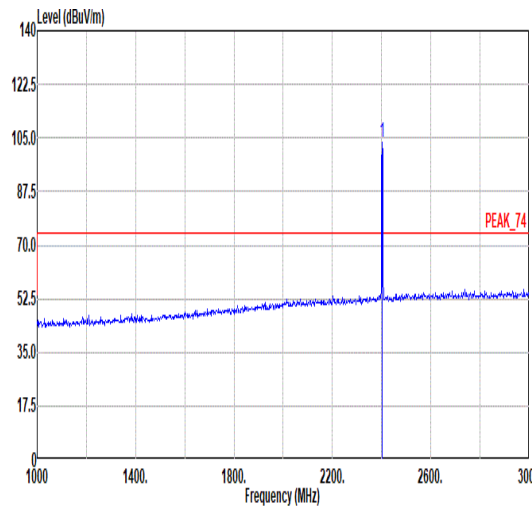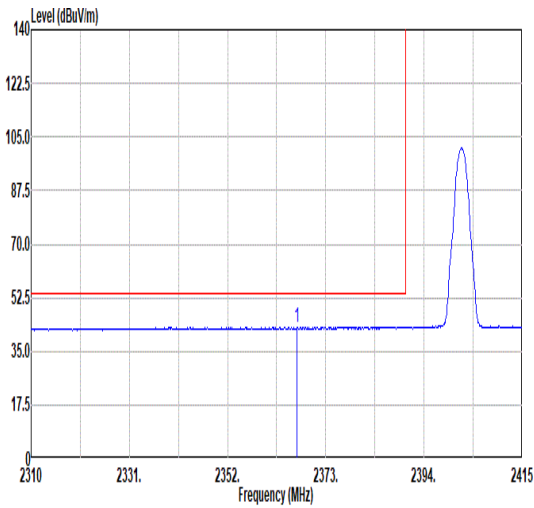
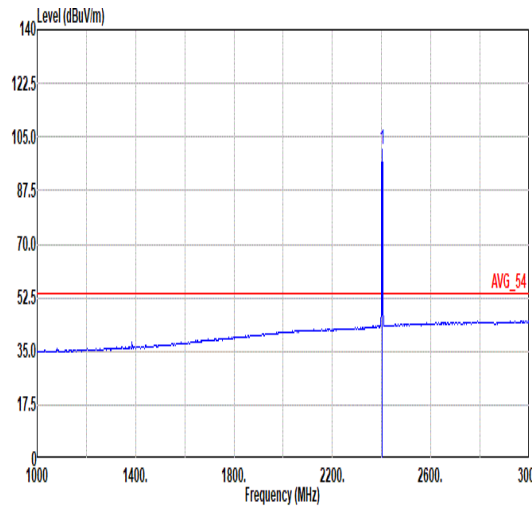


Mode	7																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2310.95</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>45.70</td><td>32.06</td><td>7.70</td><td>32.28</td><td>152</td><td>291 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2310.95	53.18	74.00	-20.82	45.70	32.06	7.70	32.28	152	291 PEAK	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.49</td><td>-----</td><td>-----</td><td>95.65</td><td>32.22</td><td>7.86</td><td>32.24</td><td>152</td><td>291 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.49	-----	-----	95.65	32.22	7.86	32.24	152	291 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2310.95	53.18	74.00	-20.82	45.70	32.06	7.70	32.28	152	291 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	103.49	-----	-----	95.65	32.22	7.86	32.24	152	291 PEAK																																																																										
Avg	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2366.81</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>35.19</td><td>32.16</td><td>7.80</td><td>32.25</td><td>152</td><td>291 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2366.81	42.90	54.00	-11.10	35.19	32.16	7.80	32.25	152	291 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.12</td><td>-----</td><td>-----</td><td>93.28</td><td>32.22</td><td>7.86</td><td>32.24</td><td>152</td><td>291 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.12	-----	-----	93.28	32.22	7.86	32.24	152	291 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2366.81	42.90	54.00	-11.10	35.19	32.16	7.80	32.25	152	291 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	101.12	-----	-----	93.28	32.22	7.86	32.24	152	291 AVERAGE																																																																										

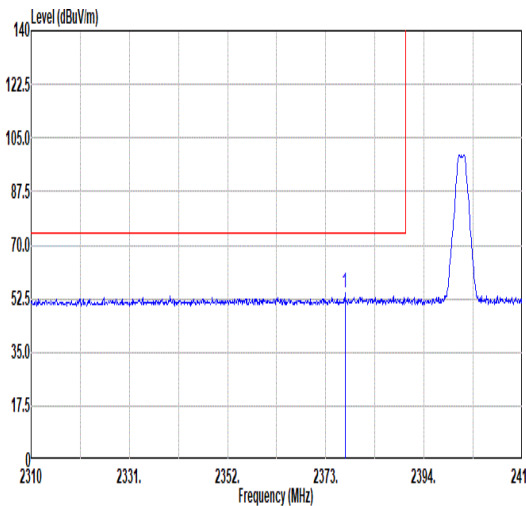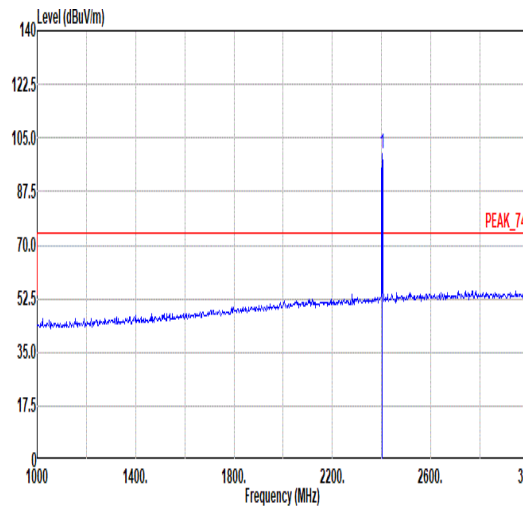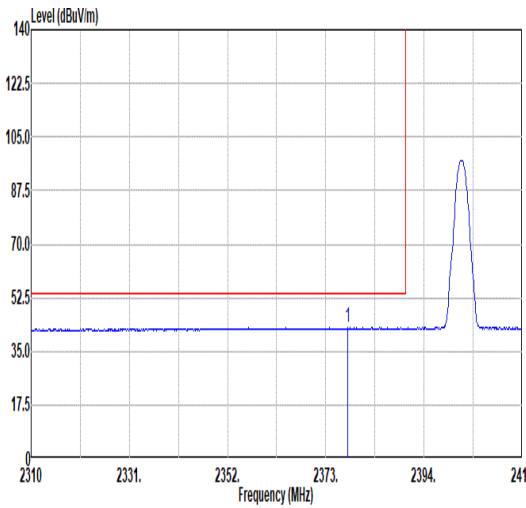
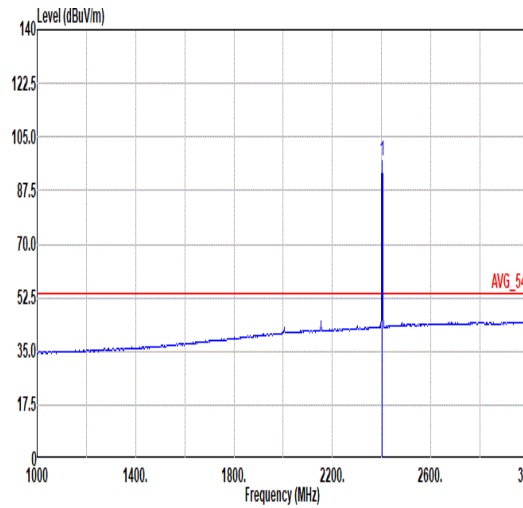


Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.10</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>46.43</td><td>32.18</td><td>7.82</td><td>32.25</td><td>288 354 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2377.10	54.18	74.00	-19.82	46.43	32.18	7.82	32.25	288 354 PEAK	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.60</td><td>-----</td><td>-----</td><td>91.76</td><td>32.22</td><td>7.86</td><td>32.24</td><td>288 354 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.60	-----	-----	91.76	32.22	7.86	32.24	288 354 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2377.10	54.18	74.00	-19.82	46.43	32.18	7.82	32.25	288 354 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	99.60	-----	-----	91.76	32.22	7.86	32.24	288 354 PEAK																																																																									
Avg	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.62</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>35.02</td><td>32.18</td><td>7.82</td><td>32.25</td><td>288 354 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2377.62	42.77	54.00	-11.23	35.02	32.18	7.82	32.25	288 354 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.30</td><td>-----</td><td>-----</td><td>89.46</td><td>32.22</td><td>7.86</td><td>32.24</td><td>288 354 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.30	-----	-----	89.46	32.22	7.86	32.24	288 354 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2377.62	42.77	54.00	-11.23	35.02	32.18	7.82	32.25	288 354 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	97.30	-----	-----	89.46	32.22	7.86	32.24	288 354 AVERAGE																																																																									



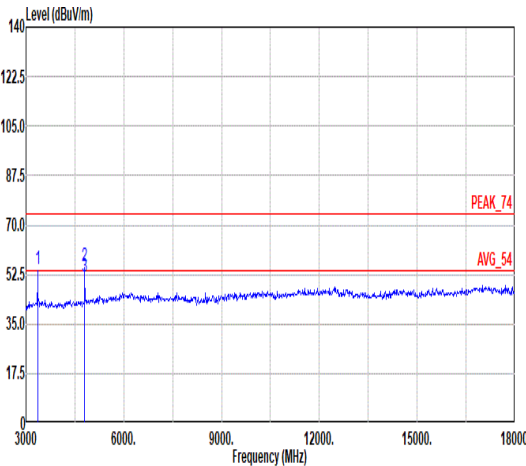
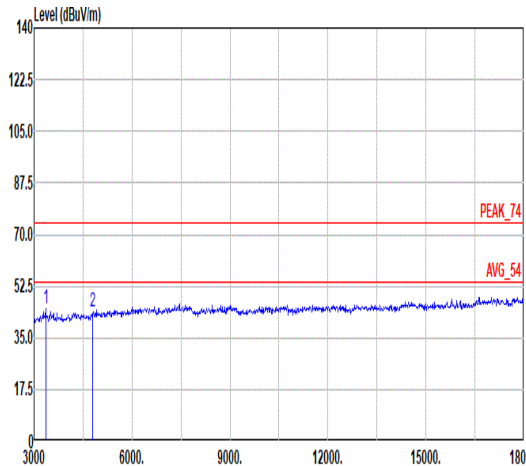


Mode	7																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3360.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>75.68</td><td>32.87</td><td>9.31</td><td>63.64</td><td>258</td><td>174</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>75.30</td><td>34.08</td><td>11.00</td><td>64.80</td><td>102</td><td>275</td><td>Peak</td></tr><tr><td>3</td><td>4804.00</td><td>51.88</td><td>54.00</td><td>-2.12</td><td>71.60</td><td>34.08</td><td>11.00</td><td>64.80</td><td>102</td><td>275</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3360.00	54.22	74.00	-19.78	75.68	32.87	9.31	63.64	258	174	Peak	2	4804.00	55.58	74.00	-18.42	75.30	34.08	11.00	64.80	102	275	Peak	3	4804.00	51.88	54.00	-2.12	71.60	34.08	11.00	64.80	102	275	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3360.00</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>66.25</td><td>32.87</td><td>9.31</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>43.75</td><td>74.00</td><td>-30.25</td><td>63.47</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3360.00	44.79	74.00	-29.21	66.25	32.87	9.31	63.64	---	---	Peak	2	4804.00	43.75	74.00	-30.25	63.47	34.08	11.00	64.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	3360.00	54.22	74.00	-19.78	75.68	32.87	9.31	63.64	258	174	Peak																																																																																																																			
2	4804.00	55.58	74.00	-18.42	75.30	34.08	11.00	64.80	102	275	Peak																																																																																																																			
3	4804.00	51.88	54.00	-2.12	71.60	34.08	11.00	64.80	102	275	Average																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	3360.00	44.79	74.00	-29.21	66.25	32.87	9.31	63.64	---	---	Peak																																																																																																																			
2	4804.00	43.75	74.00	-30.25	63.47	34.08	11.00	64.80	---	---	Peak																																																																																																																			



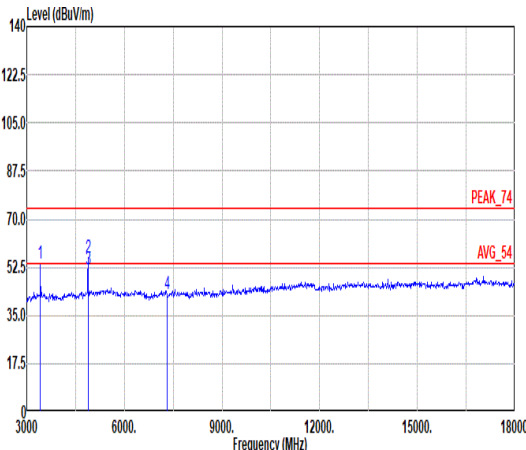
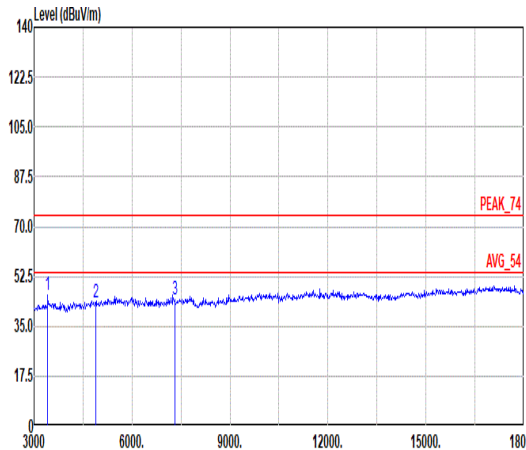


Mode	8																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3420.00</td><td>53.98</td><td>74.00</td><td>-20.02</td><td>75.30</td><td>32.88</td><td>9.38</td><td>63.58</td><td>259</td><td>175</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>75.63</td><td>34.13</td><td>10.96</td><td>64.80</td><td>104</td><td>278</td><td>Peak</td></tr><tr><td>3</td><td>4880.00</td><td>51.84</td><td>54.00</td><td>-2.16</td><td>71.55</td><td>34.13</td><td>10.96</td><td>64.80</td><td>104</td><td>278</td><td>Average</td></tr><tr><td>4</td><td>7320.00</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>58.17</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3420.00	53.98	74.00	-20.02	75.30	32.88	9.38	63.58	259	175	Peak	2	4880.00	55.92	74.00	-18.08	75.63	34.13	10.96	64.80	104	278	Peak	3	4880.00	51.84	54.00	-2.16	71.55	34.13	10.96	64.80	104	278	Average	4	7320.00	42.77	74.00	-31.23	58.17	35.57	13.55	64.52	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3420.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>67.36</td><td>32.88</td><td>9.38</td><td>63.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>63.05</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>59.52</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3420.00	46.04	74.00	-27.96	67.36	32.88	9.38	63.58	---	---	Peak	2	4880.00	43.34	74.00	-30.66	63.05	34.13	10.96	64.80	---	---	Peak	3	7320.00	44.12	74.00	-29.88	59.52	35.57	13.55	64.52	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	3420.00	53.98	74.00	-20.02	75.30	32.88	9.38	63.58	259	175	Peak																																																																																																																																												
2	4880.00	55.92	74.00	-18.08	75.63	34.13	10.96	64.80	104	278	Peak																																																																																																																																												
3	4880.00	51.84	54.00	-2.16	71.55	34.13	10.96	64.80	104	278	Average																																																																																																																																												
4	7320.00	42.77	74.00	-31.23	58.17	35.57	13.55	64.52	---	---	Peak																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	3420.00	46.04	74.00	-27.96	67.36	32.88	9.38	63.58	---	---	Peak																																																																																																																																												
2	4880.00	43.34	74.00	-30.66	63.05	34.13	10.96	64.80	---	---	Peak																																																																																																																																												
3	7320.00	44.12	74.00	-29.88	59.52	35.57	13.55	64.52	---	---	Peak																																																																																																																																												

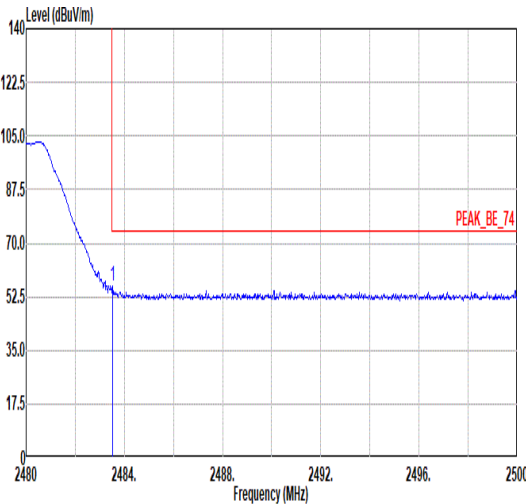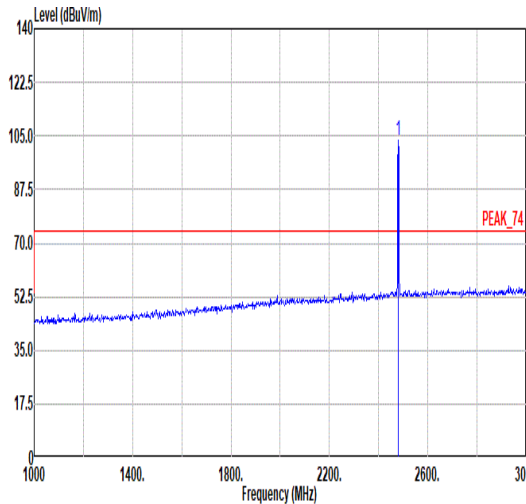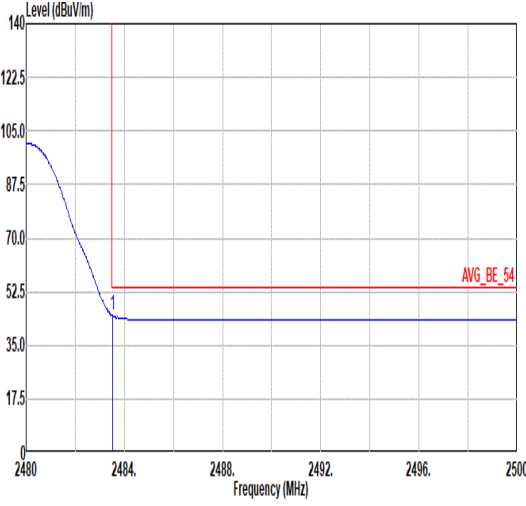
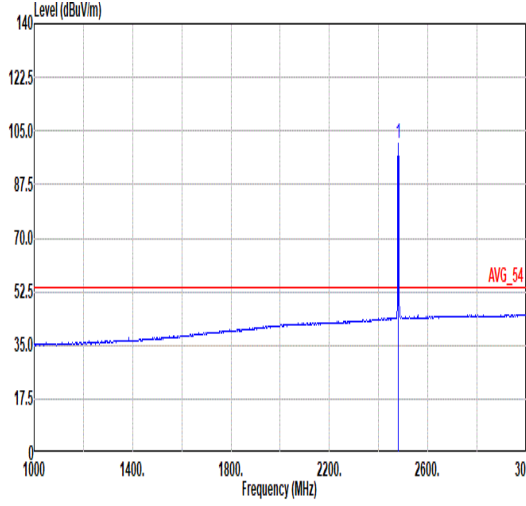


Mode	9																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>47.68</td><td>32.37</td><td>7.99</td><td>32.21</td><td>100</td><td>76 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	55.83	74.00	-18.17	47.68	32.37	7.99	32.21	100	76 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.43</td><td>-----</td><td>-----</td><td>95.30</td><td>32.36</td><td>7.98</td><td>32.21</td><td>100</td><td>76 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.43	-----	-----	95.30	32.36	7.98	32.21	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.52	55.83	74.00	-18.17	47.68	32.37	7.99	32.21	100	76 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	103.43	-----	-----	95.30	32.36	7.98	32.21	100	76 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>36.49</td><td>32.37</td><td>7.99</td><td>32.21</td><td>100</td><td>76 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	44.64	54.00	-9.36	36.49	32.37	7.99	32.21	100	76 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.99</td><td>-----</td><td>-----</td><td>92.86</td><td>32.36</td><td>7.98</td><td>32.21</td><td>100</td><td>76 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.99	-----	-----	92.86	32.36	7.98	32.21	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.52	44.64	54.00	-9.36	36.49	32.37	7.99	32.21	100	76 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	100.99	-----	-----	92.86	32.36	7.98	32.21	100	76 AVERAGE																																																																																	

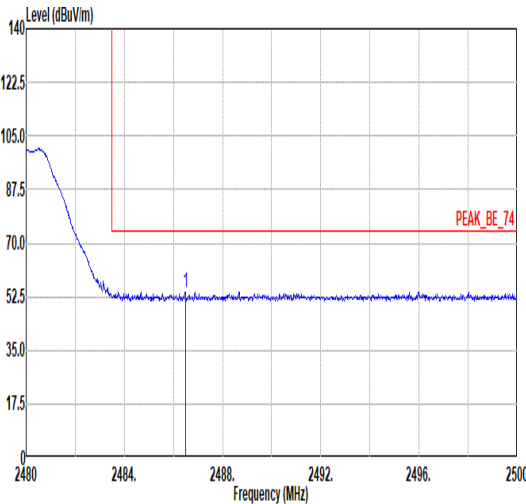
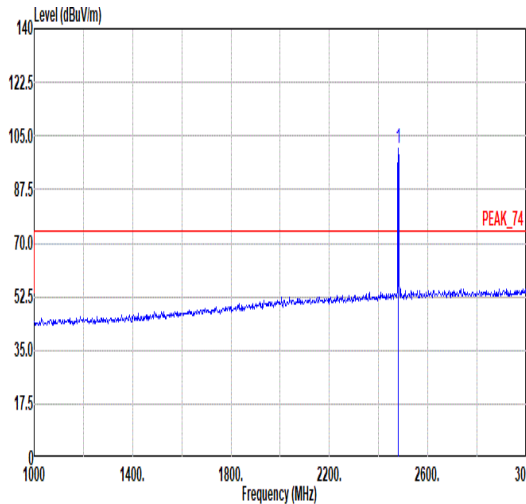
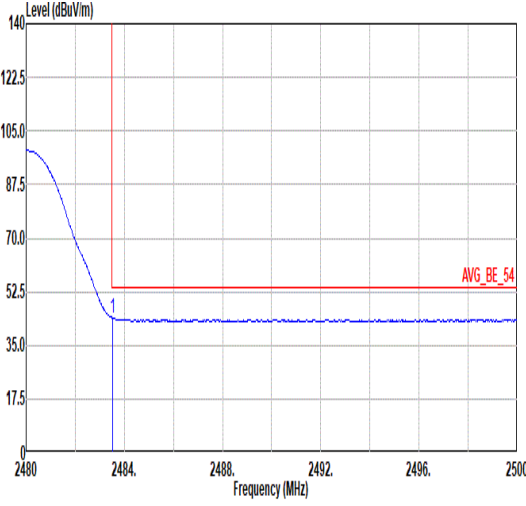
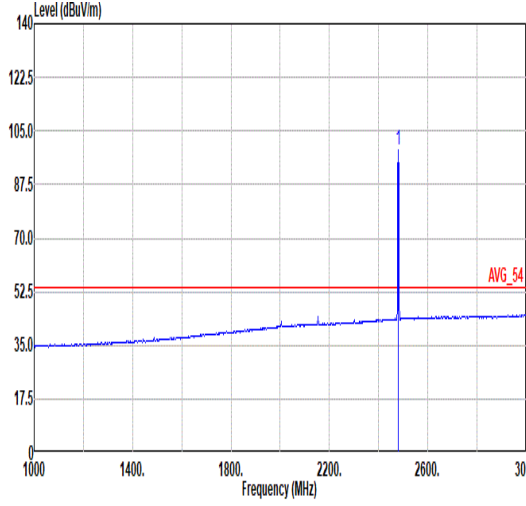


Mode	9																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.48</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>45.75</td><td>32.38</td><td>8.00</td><td>32.21</td><td>275 173 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.48	53.92	74.00	-20.08	45.75	32.38	8.00	32.21	275 173 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.91</td><td>-----</td><td>-----</td><td>92.78</td><td>32.36</td><td>7.98</td><td>32.21</td><td>275 173 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.91	-----	-----	92.78	32.36	7.98	32.21
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2486.48	53.92	74.00	-20.08	45.75	32.38	8.00	32.21	275 173 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	100.91	-----	-----	92.78	32.36	7.98	32.21	275 173 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>35.81</td><td>32.37</td><td>7.99</td><td>32.21</td><td>275 173 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	43.96	54.00	-10.04	35.81	32.37	7.99	32.21	275 173 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.58</td><td>-----</td><td>-----</td><td>90.45</td><td>32.36</td><td>7.98</td><td>32.21</td><td>275 173 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.58	-----	-----	90.45	32.36	7.98	32.21
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.52	43.96	54.00	-10.04	35.81	32.37	7.99	32.21	275 173 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	98.58	-----	-----	90.45	32.36	7.98	32.21	275 173 AVERAGE																																																																																



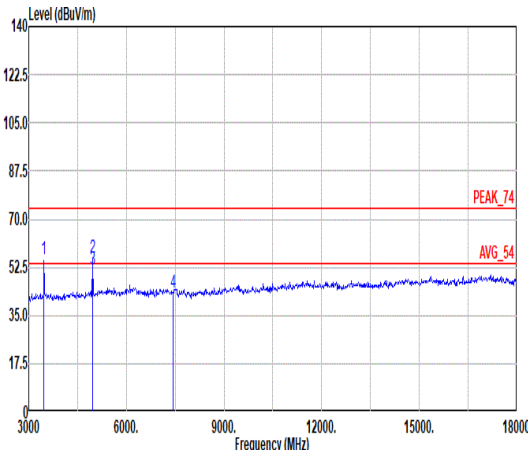
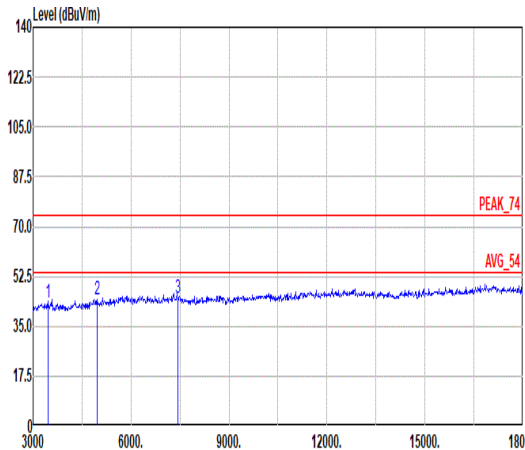


Mode	9																																																																																			
	Harmonic																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal																																																																																			
Peak Avg																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3465.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>76.83</td><td>32.89</td><td>9.42</td><td>63.53</td><td>257</td><td>276 Peak</td></tr><tr><td>2</td><td>4960.00</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>75.90</td><td>34.18</td><td>10.92</td><td>64.80</td><td>102</td><td>276 Peak</td></tr><tr><td>3</td><td>4960.00</td><td>51.52</td><td>54.00</td><td>-2.48</td><td>71.22</td><td>34.18</td><td>10.92</td><td>64.80</td><td>102</td><td>276 Average</td></tr><tr><td>4</td><td>7440.00</td><td>43.56</td><td>74.00</td><td>-30.44</td><td>58.67</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3465.00	55.61	74.00	-18.39	76.83	32.89	9.42	63.53	257	276 Peak	2	4960.00	56.20	74.00	-17.80	75.90	34.18	10.92	64.80	102	276 Peak	3	4960.00	51.52	54.00	-2.48	71.22	34.18	10.92	64.80	102	276 Average	4	7440.00	43.56	74.00	-30.44	58.67	35.52	13.68	64.31	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	3465.00	55.61	74.00	-18.39	76.83	32.89	9.42	63.53	257	276 Peak																																																																										
2	4960.00	56.20	74.00	-17.80	75.90	34.18	10.92	64.80	102	276 Peak																																																																										
3	4960.00	51.52	54.00	-2.48	71.22	34.18	10.92	64.80	102	276 Average																																																																										
4	7440.00	43.56	74.00	-30.44	58.67	35.52	13.68	64.31	---	---	Peak																																																																									
Pol.	Vertical																																																																																			
Peak Avg																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3465.00</td><td>43.37</td><td>74.00</td><td>-30.63</td><td>64.59</td><td>32.89</td><td>9.42</td><td>63.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>44.39</td><td>74.00</td><td>-29.61</td><td>64.09</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>60.11</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3465.00	43.37	74.00	-30.63	64.59	32.89	9.42	63.53	---	---	Peak	2	4960.00	44.39	74.00	-29.61	64.09	34.18	10.92	64.80	---	---	Peak	3	7440.00	45.00	74.00	-29.00	60.11	35.52	13.68	64.31	---	---	Peak									
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	3465.00	43.37	74.00	-30.63	64.59	32.89	9.42	63.53	---	---	Peak																																																																									
2	4960.00	44.39	74.00	-29.61	64.09	34.18	10.92	64.80	---	---	Peak																																																																									
3	7440.00	45.00	74.00	-29.00	60.11	35.52	13.68	64.31	---	---	Peak																																																																									

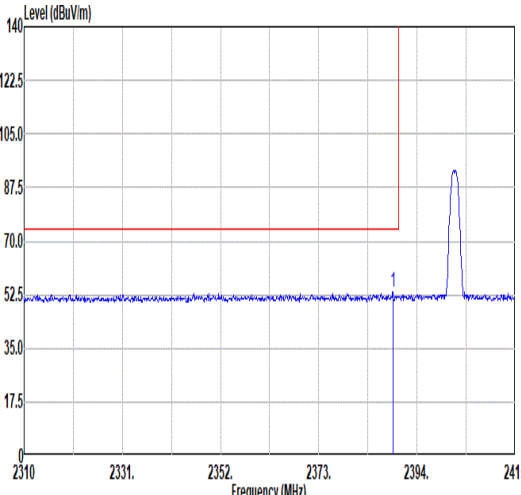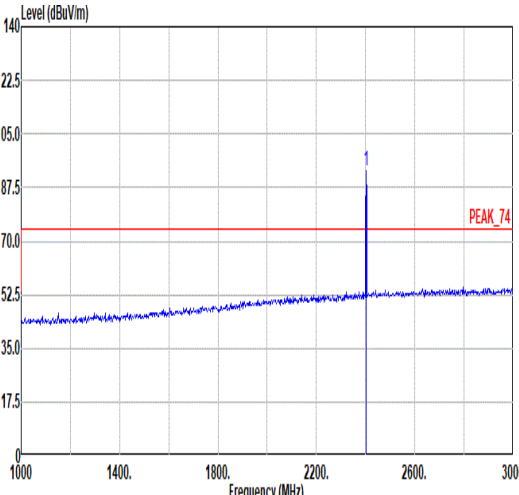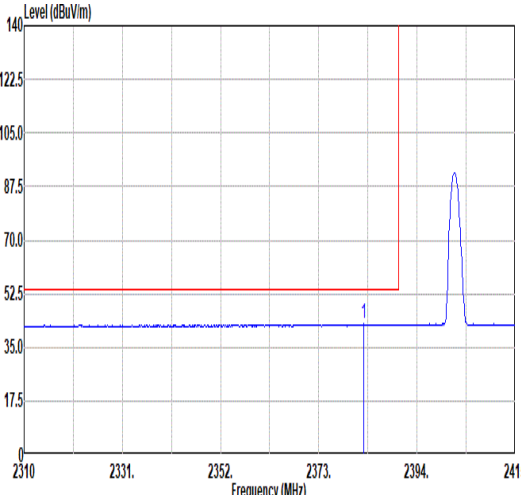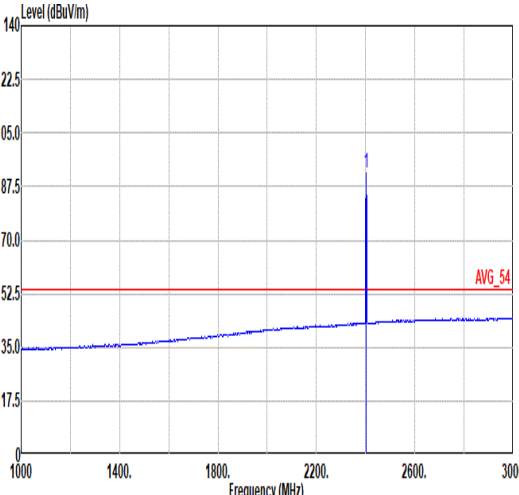

Mode	13																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal					Fundamental																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.86</td><td>53.50</td><td>74.00</td><td>-20.50</td><td>45.71</td><td>32.20</td><td>7.84</td><td>32.25</td><td>129 274 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.86	53.50	74.00	-20.50	45.71	32.20	7.84	32.25	129 274 PEAK	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.13</td><td>-----</td><td>-----</td><td>85.29</td><td>32.22</td><td>7.86</td><td>32.24</td><td>129 274 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.13	-----	-----	85.29	32.22	7.86	32.24	129 274 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2388.86	53.50	74.00	-20.50	45.71	32.20	7.84	32.25	129 274 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2402.00	93.13	-----	-----	85.29	32.22	7.86	32.24	129 274 PEAK																																																																											
Avg	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.56</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>34.89</td><td>32.19</td><td>7.83</td><td>32.25</td><td>129 274 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2382.56	42.66	54.00	-11.34	34.89	32.19	7.83	32.25	129 274 AVERAGE	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>91.91</td><td>-----</td><td>-----</td><td>84.07</td><td>32.22</td><td>7.86</td><td>32.24</td><td>129 274 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.91	-----	-----	84.07	32.22	7.86	32.24	129 274 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2382.56	42.66	54.00	-11.34	34.89	32.19	7.83	32.25	129 274 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2402.00	91.91	-----	-----	84.07	32.22	7.86	32.24	129 274 AVERAGE																																																																											

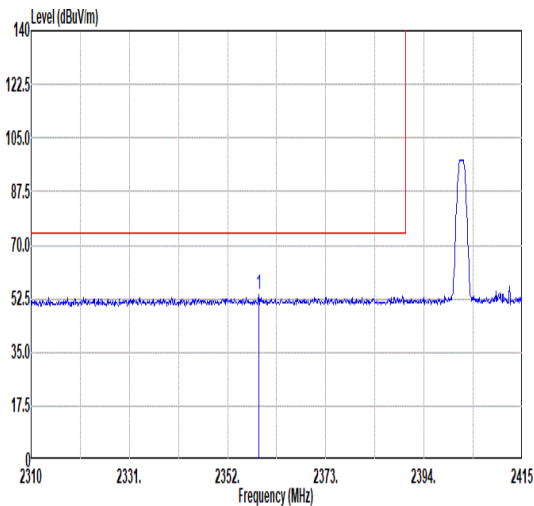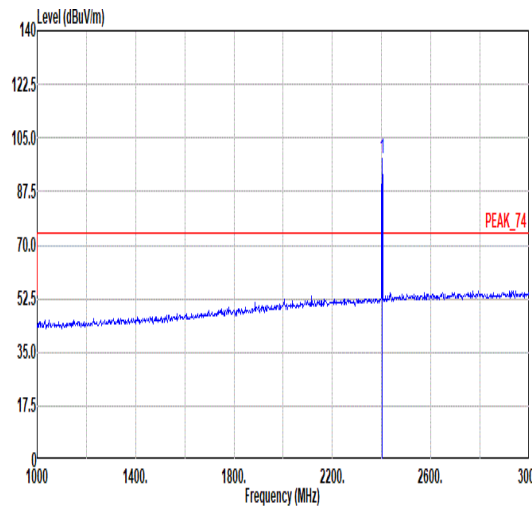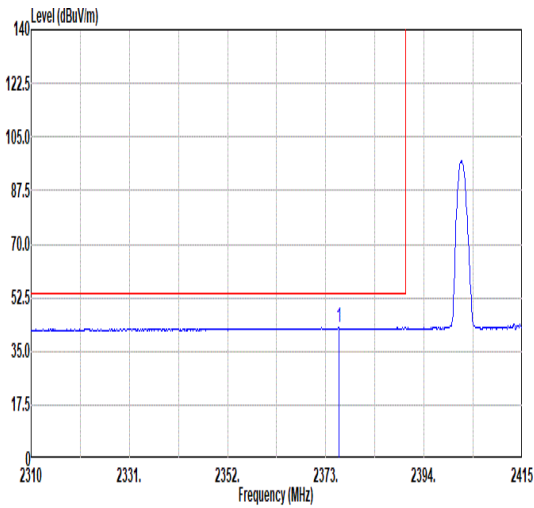
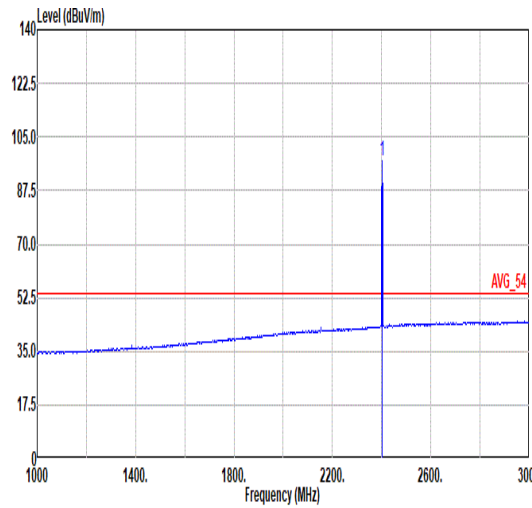


Mode	13																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	2																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2358.62</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>45.96</td><td>32.15</td><td>7.79</td><td>32.26</td><td>221</td><td>240 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2358.62	53.64	74.00	-20.36	45.96	32.15	7.79	32.26	221	240 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.21</td><td>-----</td><td>-----</td><td>90.37</td><td>32.22</td><td>7.86</td><td>32.24</td><td>221</td><td>240 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.21	-----	-----	90.37	32.22	7.86	32.24	221
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2358.62	53.64	74.00	-20.36	45.96	32.15	7.79	32.26	221	240 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	98.21	-----	-----	90.37	32.22	7.86	32.24	221	240 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.84</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>35.03</td><td>32.18</td><td>7.82</td><td>32.25</td><td>221</td><td>240 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2375.84	42.78	54.00	-11.22	35.03	32.18	7.82	32.25	221	240 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.05</td><td>-----</td><td>-----</td><td>89.21</td><td>32.22</td><td>7.86</td><td>32.24</td><td>221</td><td>240 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.05	-----	-----	89.21	32.22	7.86	32.24	221
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2375.84	42.78	54.00	-11.22	35.03	32.18	7.82	32.25	221	240 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	97.05	-----	-----	89.21	32.22	7.86	32.24	221	240 AVERAGE																																																																																	







Mode	13																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.77</td><td>74.00</td><td>-30.23</td><td>63.49</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.77	74.00	-30.23	63.49	34.08	11.00	64.80	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.70</td><td>74.00</td><td>-30.30</td><td>63.42</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.70	74.00	-30.30	63.42	34.08	11.00	64.80	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	4804.00	43.77	74.00	-30.23	63.49	34.08	11.00	64.80	---	---	Peak																																																																																									
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	4804.00	43.70	74.00	-30.30	63.42	34.08	11.00	64.80	---	---	Peak																																																																																									



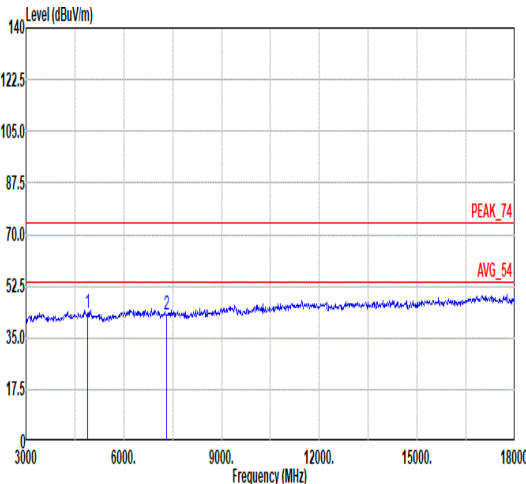
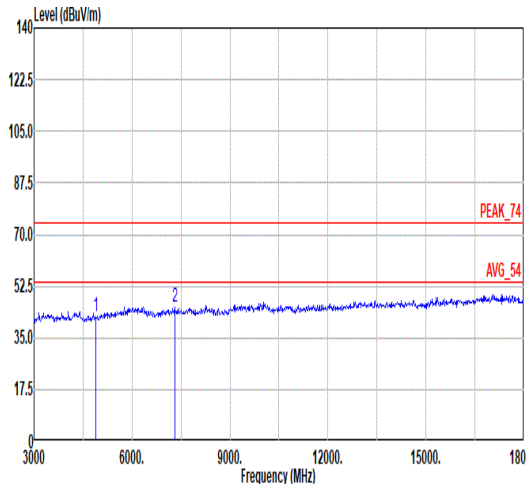


Mode	14																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																					
ANT	2																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>43.43</td><td>74.00</td><td>-30.57</td><td>63.14</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>42.94</td><td>74.00</td><td>-31.06</td><td>58.34</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	43.43	74.00	-30.57	63.14	34.13	10.96	64.80	---	---	Peak	2	7320.00	42.94	74.00	-31.06	58.34	35.57	13.55	64.52	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>42.51</td><td>74.00</td><td>-31.49</td><td>62.22</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.36</td><td>74.00</td><td>-28.64</td><td>60.76</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	42.51	74.00	-31.49	62.22	34.13	10.96	64.80	---	---	Peak	2	7320.00	45.36	74.00	-28.64	60.76	35.57	13.55	64.52	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	4880.00	43.43	74.00	-30.57	63.14	34.13	10.96	64.80	---	---	Peak																																																																																																											
2	7320.00	42.94	74.00	-31.06	58.34	35.57	13.55	64.52	---	---	Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	4880.00	42.51	74.00	-31.49	62.22	34.13	10.96	64.80	---	---	Peak																																																																																																											
2	7320.00	45.36	74.00	-28.64	60.76	35.57	13.55	64.52	---	---	Peak																																																																																																											

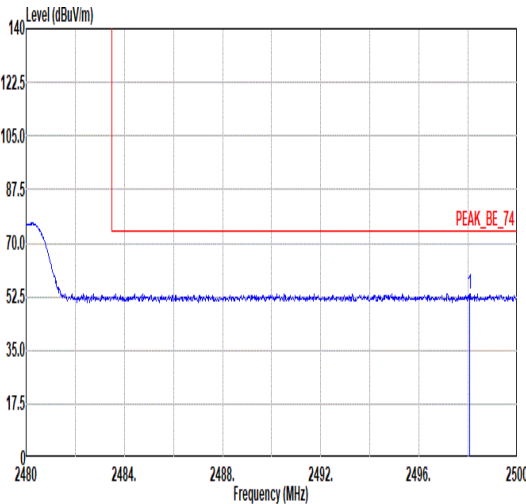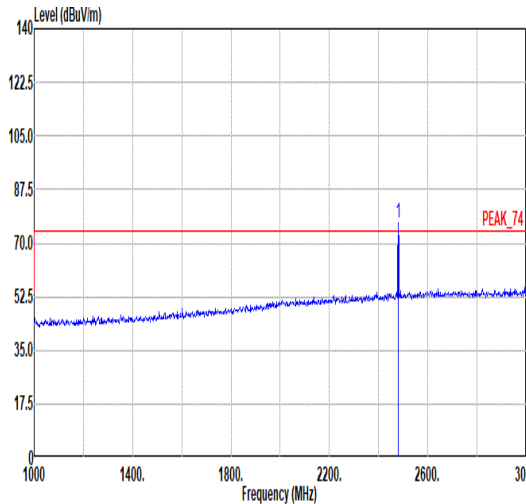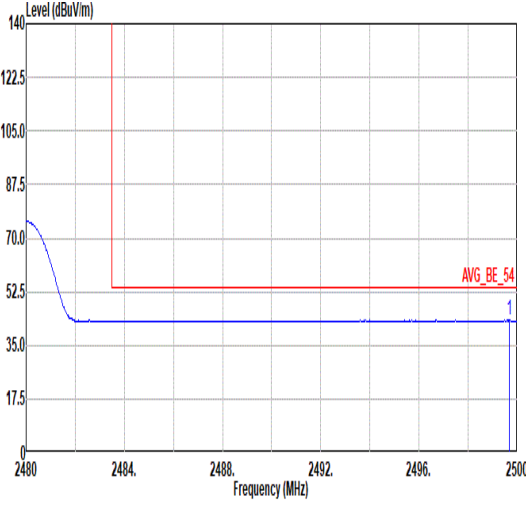
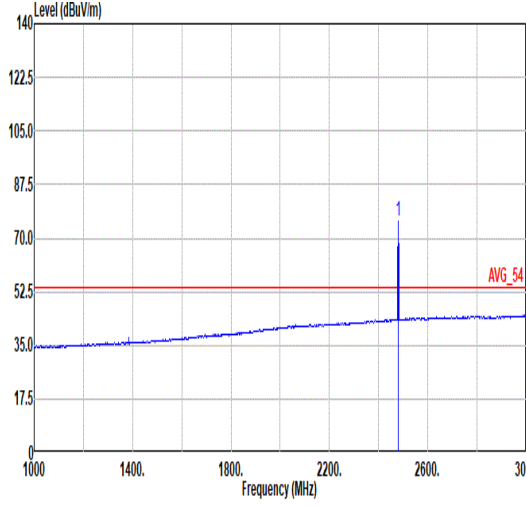


Mode	15																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.06</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>45.37</td><td>32.40</td><td>8.01</td><td>32.20</td><td>217</td><td>254 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2498.06	53.58	74.00	-20.42	45.37	32.40	8.01	32.20	217	254 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>76.83</td><td>-----</td><td>-----</td><td>68.70</td><td>32.36</td><td>7.98</td><td>32.21</td><td>217</td><td>254 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	76.83	-----	-----	68.70	32.36	7.98	32.21	217
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2498.06	53.58	74.00	-20.42	45.37	32.40	8.01	32.20	217	254 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	76.83	-----	-----	68.70	32.36	7.98	32.21	217	254 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.68</td><td>43.21</td><td>54.00</td><td>-10.79</td><td>34.99</td><td>32.40</td><td>8.02</td><td>32.20</td><td>217</td><td>254 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2499.68	43.21	54.00	-10.79	34.99	32.40	8.02	32.20	217	254 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>75.31</td><td>-----</td><td>-----</td><td>67.18</td><td>32.36</td><td>7.98</td><td>32.21</td><td>217</td><td>254 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	75.31	-----	-----	67.18	32.36	7.98	32.21	217
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2499.68	43.21	54.00	-10.79	34.99	32.40	8.02	32.20	217	254 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	75.31	-----	-----	67.18	32.36	7.98	32.21	217	254 AVERAGE																																																																																	

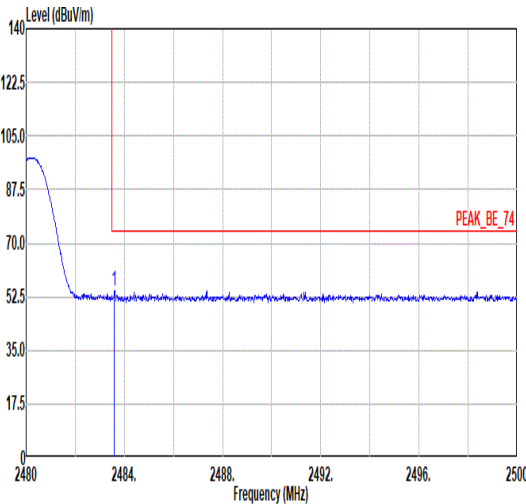
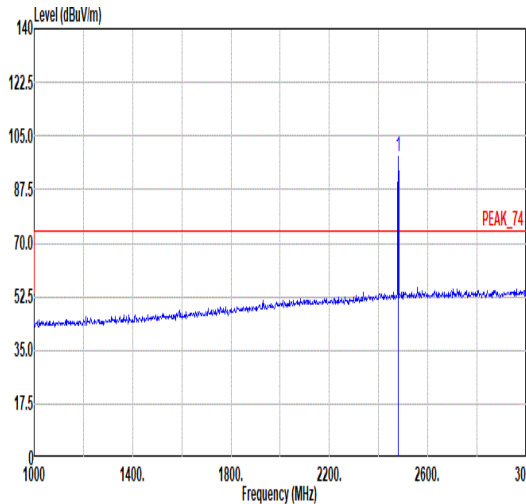
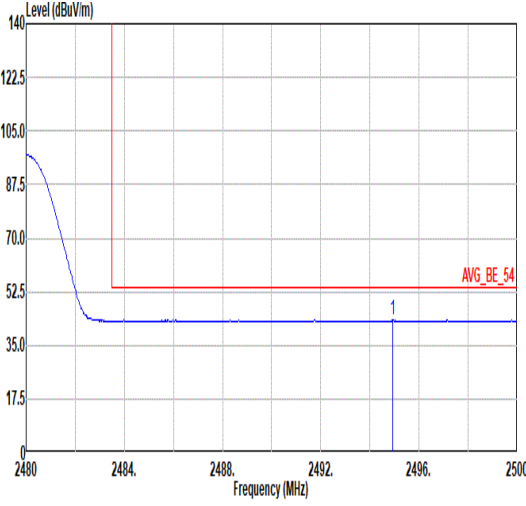
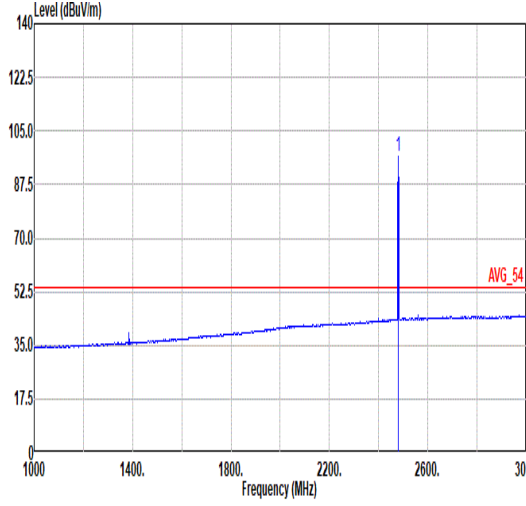


Mode	15																																																																																														
	Band Edge																																																																																														
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																														
ANT	2																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.60</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>46.21</td><td>32.37</td><td>7.99</td><td>32.21</td><td>230</td><td>261</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	54.36	74.00	-19.64	46.21	32.37	7.99	32.21	230	261	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.14</td><td>-----</td><td>-----</td><td>90.01</td><td>32.36</td><td>7.98</td><td>32.21</td><td>230</td><td>261</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.14	-----	-----	90.01	32.36	7.98	32.21	230	261
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.60	54.36	74.00	-19.64	46.21	32.37	7.99	32.21	230	261	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2480.00	98.14	-----	-----	90.01	32.36	7.98	32.21	230	261	PEAK																																																																																				
Avg																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2494.92</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>34.98</td><td>32.39</td><td>8.01</td><td>32.20</td><td>230</td><td>261</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2494.92	43.18	54.00	-10.82	34.98	32.39	8.01	32.20	230	261	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.94</td><td>-----</td><td>-----</td><td>88.81</td><td>32.36</td><td>7.98</td><td>32.21</td><td>230</td><td>261</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.94	-----	-----	88.81	32.36	7.98	32.21	230	261
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2494.92	43.18	54.00	-10.82	34.98	32.39	8.01	32.20	230	261	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2480.00	96.94	-----	-----	88.81	32.36	7.98	32.21	230	261	AVERAGE																																																																																				



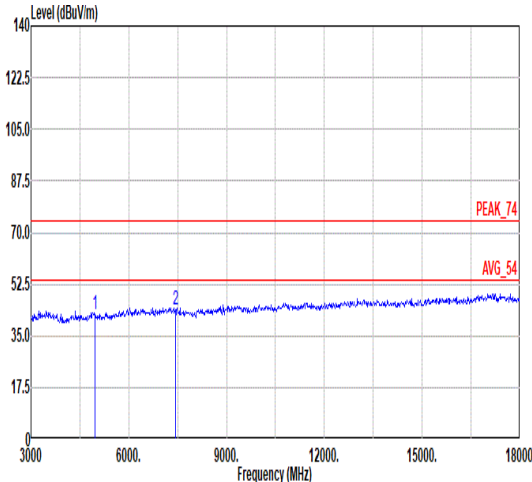
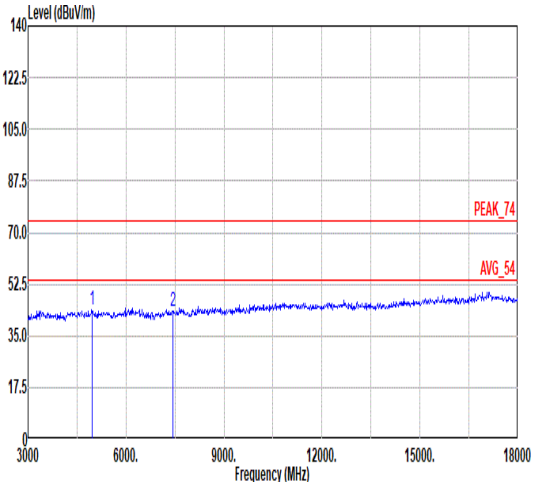


Mode	15																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																					
ANT	2																																																																																																																																					
Pol.	Horizontal								Vertical																																																																																																																													
Peak Avg																																																																																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>42.43</td><td>74.00</td><td>-31.57</td><td>62.13</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>59.17</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>										Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	42.43	74.00	-31.57	62.13	34.18	10.92	64.80	---	---	Peak	2	7440.00	44.06	74.00	-29.94	59.17	35.52	13.68	64.31	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.91</td><td>74.00</td><td>-30.09</td><td>63.61</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>43.15</td><td>74.00</td><td>-30.85</td><td>58.26</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>										Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	43.91	74.00	-30.09	63.61	34.18	10.92	64.80	---	---	Peak	2	7440.00	43.15	74.00	-30.85	58.26	35.52	13.68	64.31	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4960.00	42.43	74.00	-31.57	62.13	34.18	10.92	64.80	---	---	Peak																																																																																																																											
2	7440.00	44.06	74.00	-29.94	59.17	35.52	13.68	64.31	---	---	Peak																																																																																																																											
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4960.00	43.91	74.00	-30.09	63.61	34.18	10.92	64.80	---	---	Peak																																																																																																																											
2	7440.00	43.15	74.00	-30.85	58.26	35.52	13.68	64.31	---	---	Peak																																																																																																																											

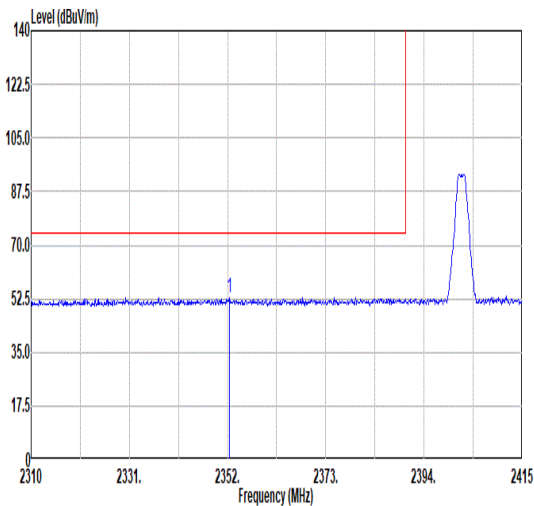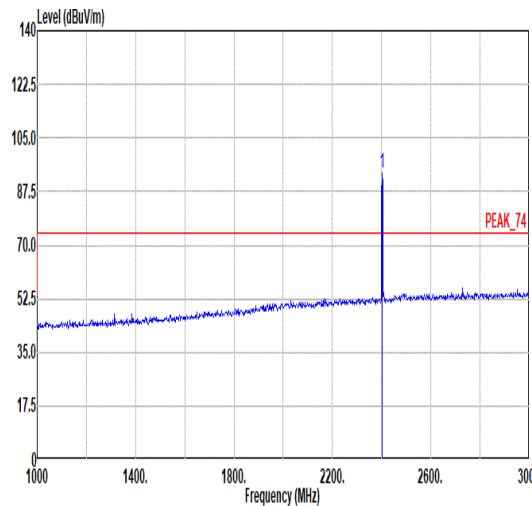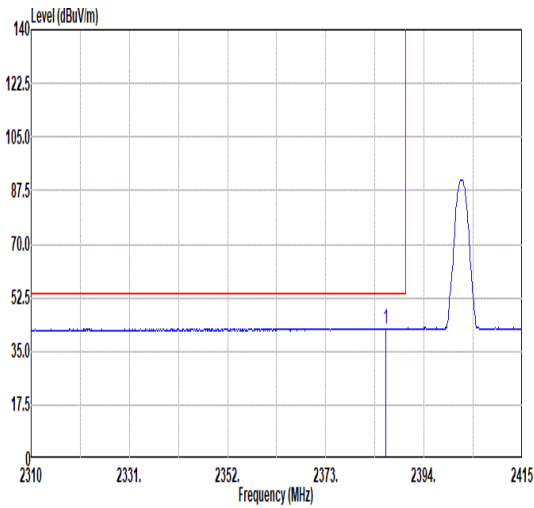
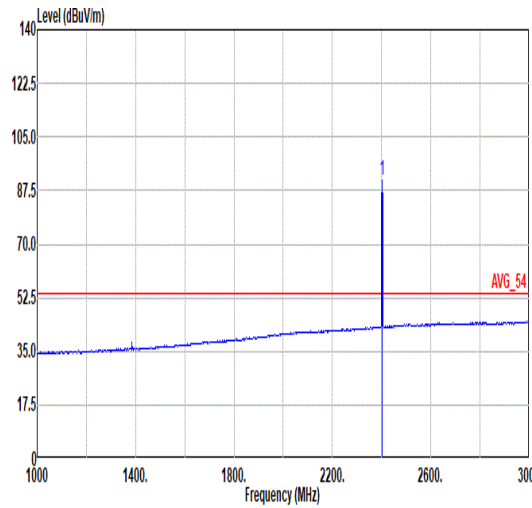


Mode	16																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.42</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>45.39</td><td>32.13</td><td>7.78</td><td>32.26</td><td>186</td><td>292 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2352.42	53.04	74.00	-20.96	45.39	32.13	7.78	32.26	186	292 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>93.34</td><td>-----</td><td>-----</td><td>85.50</td><td>32.22</td><td>7.86</td><td>32.24</td><td>186</td><td>292 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.34	-----	-----	85.50	32.22	7.86	32.24	186
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2352.42	53.04	74.00	-20.96	45.39	32.13	7.78	32.26	186	292 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	93.34	-----	-----	85.50	32.22	7.86	32.24	186	292 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.81</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>34.74</td><td>32.19</td><td>7.84</td><td>32.25</td><td>186</td><td>292 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.81	42.52	54.00	-11.48	34.74	32.19	7.84	32.25	186	292 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.09</td><td>-----</td><td>-----</td><td>83.25</td><td>32.22</td><td>7.86</td><td>32.24</td><td>186</td><td>292 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.09	-----	-----	83.25	32.22	7.86	32.24	186
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2385.81	42.52	54.00	-11.48	34.74	32.19	7.84	32.25	186	292 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	91.09	-----	-----	83.25	32.22	7.86	32.24	186	292 AVERAGE																																																																																	

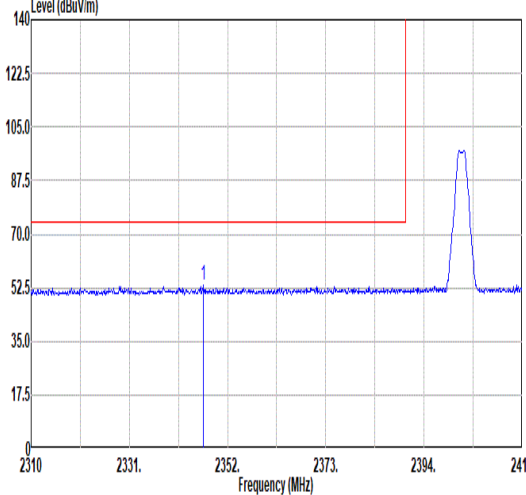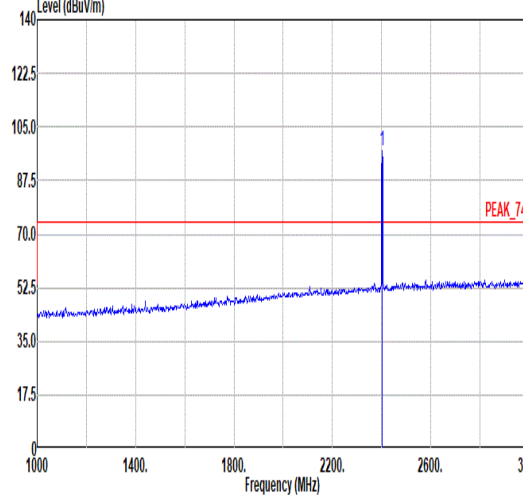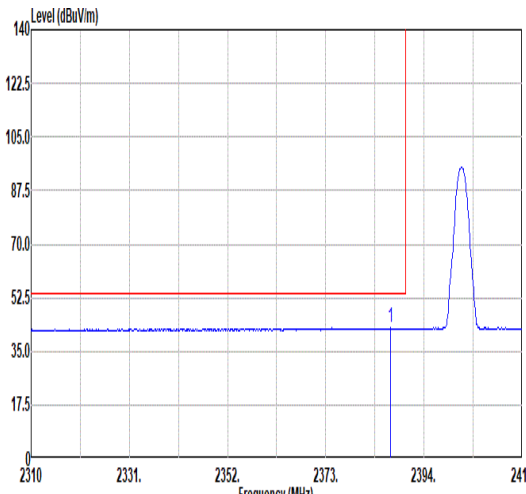
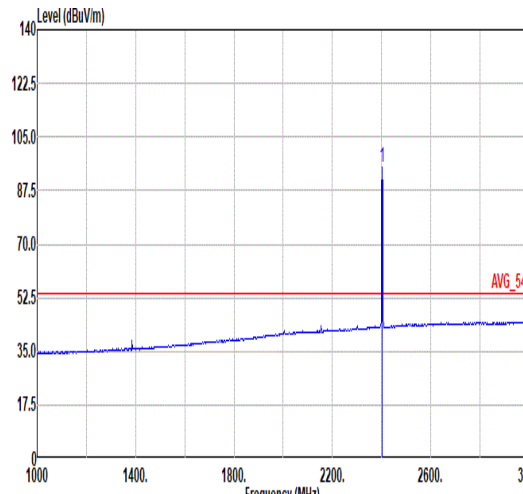


Mode	16																																																																																														
	Band Edge																																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																														
ANT	2																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2346.75</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>45.51</td><td>32.12</td><td>7.77</td><td>32.26</td><td>224</td><td>190</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2346.75	53.14	74.00	-20.86	45.51	32.12	7.77	32.26	224	190	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.38</td><td>-----</td><td>-----</td><td>89.54</td><td>32.22</td><td>7.86</td><td>32.24</td><td>224</td><td>190</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.38	-----	-----	89.54	32.22	7.86	32.24	224	190
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2346.75	53.14	74.00	-20.86	45.51	32.12	7.77	32.26	224	190	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	97.38	-----	-----	89.54	32.22	7.86	32.24	224	190	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.86</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>34.90</td><td>32.20</td><td>7.84</td><td>32.25</td><td>224</td><td>190</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.86	42.69	54.00	-11.31	34.90	32.20	7.84	32.25	224	190	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>95.10</td><td>-----</td><td>-----</td><td>87.26</td><td>32.22</td><td>7.86</td><td>32.24</td><td>224</td><td>190</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.10	-----	-----	87.26	32.22	7.86	32.24	224	190
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2386.86	42.69	54.00	-11.31	34.90	32.20	7.84	32.25	224	190	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	95.10	-----	-----	87.26	32.22	7.86	32.24	224	190	AVERAGE																																																																																				



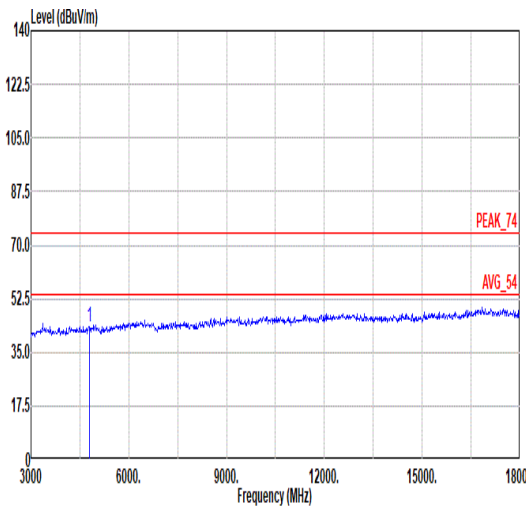
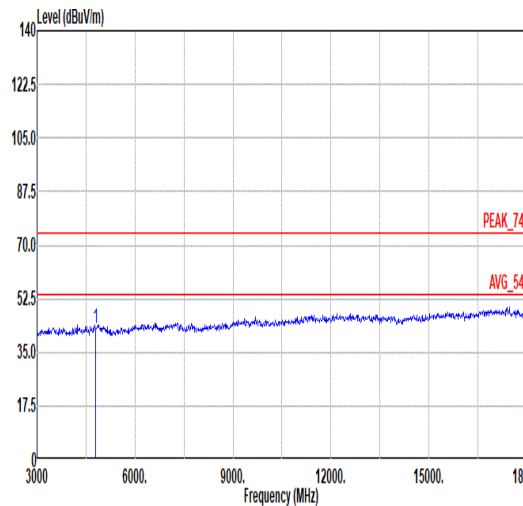


Mode	16																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_Bluetooth-LE _CH00_2402MHz																																																																																																				
ANT	2																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.23</td><td>74.00</td><td>-30.77</td><td>62.95</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.23	74.00	-30.77	62.95	34.08	11.00	64.80	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>62.71</td><td>34.08</td><td>11.00</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.99	74.00	-31.01	62.71	34.08	11.00	64.80	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4804.00	43.23	74.00	-30.77	62.95	34.08	11.00	64.80	---	---	Peak																																																																																										
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4804.00	42.99	74.00	-31.01	62.71	34.08	11.00	64.80	---	---	Peak																																																																																										



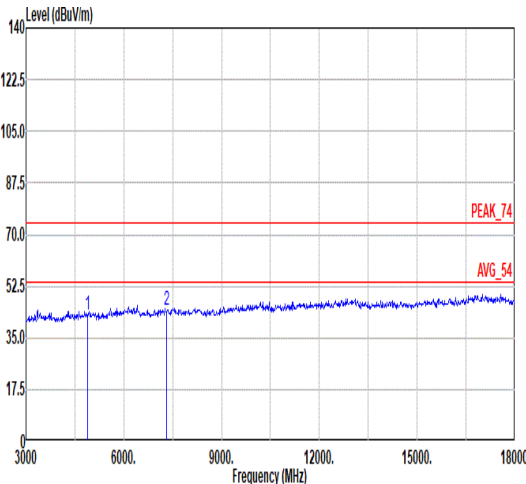
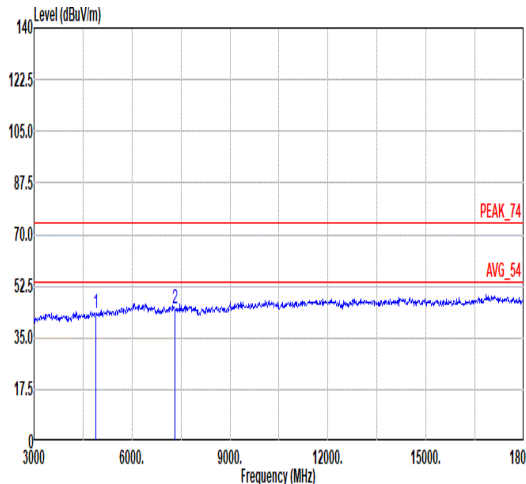


Mode	17																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																	
ANT	2																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>42.66</td><td>74.00</td><td>-31.34</td><td>62.37</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>59.87</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	42.66	74.00	-31.34	62.37	34.13	10.96	64.80	---	---	Peak	2	7320.00	44.47	74.00	-29.53	59.87	35.57	13.55	64.52	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>62.96</td><td>34.13</td><td>10.96</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>60.20</td><td>35.57</td><td>13.55</td><td>64.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	43.25	74.00	-30.75	62.96	34.13	10.96	64.80	---	---	Peak	2	7320.00	44.80	74.00	-29.20	60.20	35.57	13.55	64.52	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4880.00	42.66	74.00	-31.34	62.37	34.13	10.96	64.80	---	---	Peak																																																																																																																							
2	7320.00	44.47	74.00	-29.53	59.87	35.57	13.55	64.52	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4880.00	43.25	74.00	-30.75	62.96	34.13	10.96	64.80	---	---	Peak																																																																																																																							
2	7320.00	44.80	74.00	-29.20	60.20	35.57	13.55	64.52	---	---	Peak																																																																																																																							

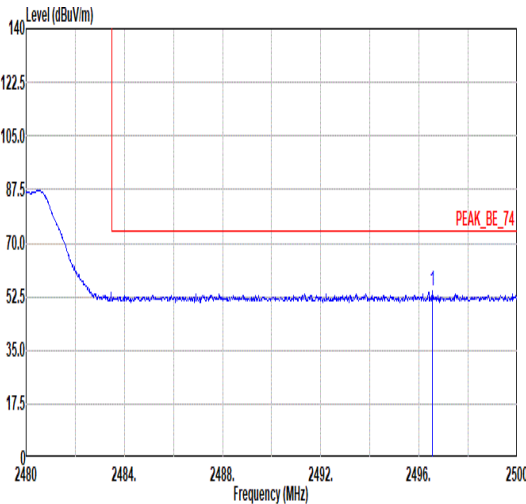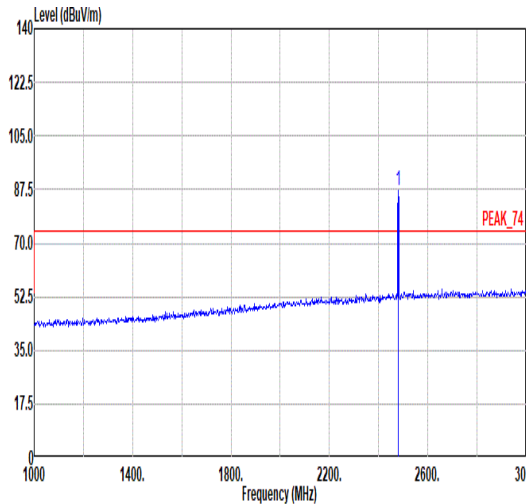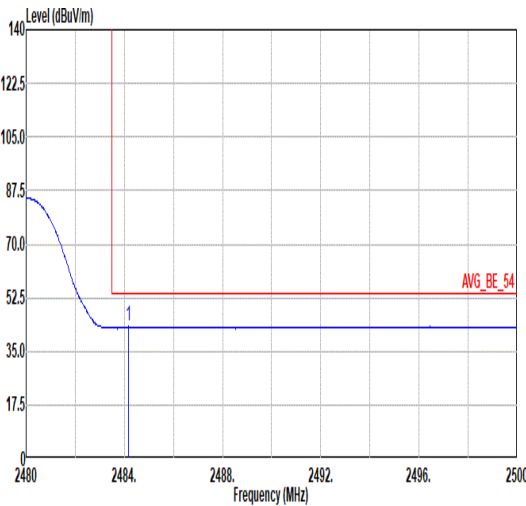
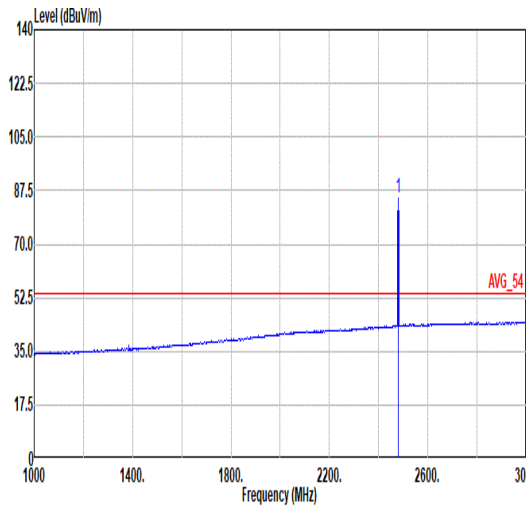


Mode	18																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.54</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>45.96</td><td>32.39</td><td>8.01</td><td>32.20</td><td>175</td><td>309 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2496.54	54.16	74.00	-19.84	45.96	32.39	8.01	32.20	175	309 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>87.28</td><td>-----</td><td>-----</td><td>79.15</td><td>32.36</td><td>7.98</td><td>32.21</td><td>175</td><td>309 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.28	-----	-----	79.15	32.36	7.98	32.21	175
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2496.54	54.16	74.00	-19.84	45.96	32.39	8.01	32.20	175	309 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	87.28	-----	-----	79.15	32.36	7.98	32.21	175	309 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.16</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>34.94</td><td>32.37</td><td>7.99</td><td>32.21</td><td>175</td><td>309 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.16	43.09	54.00	-10.91	34.94	32.37	7.99	32.21	175	309 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>84.81</td><td>-----</td><td>-----</td><td>76.68</td><td>32.36</td><td>7.98</td><td>32.21</td><td>175</td><td>309 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	84.81	-----	-----	76.68	32.36	7.98	32.21	175
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2484.16	43.09	54.00	-10.91	34.94	32.37	7.99	32.21	175	309 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	84.81	-----	-----	76.68	32.36	7.98	32.21	175	309 AVERAGE																																																																																	

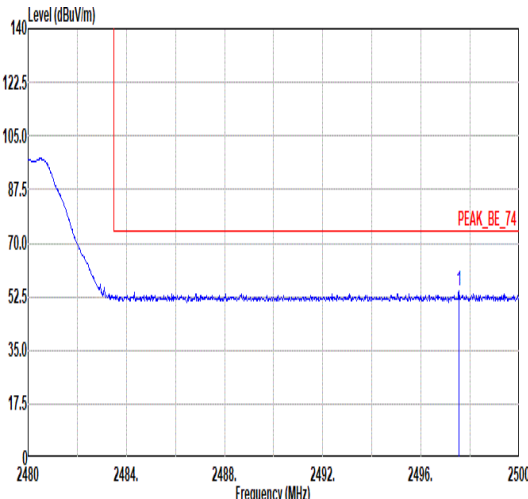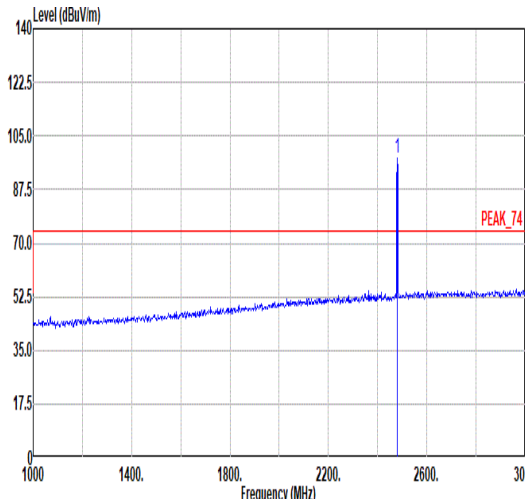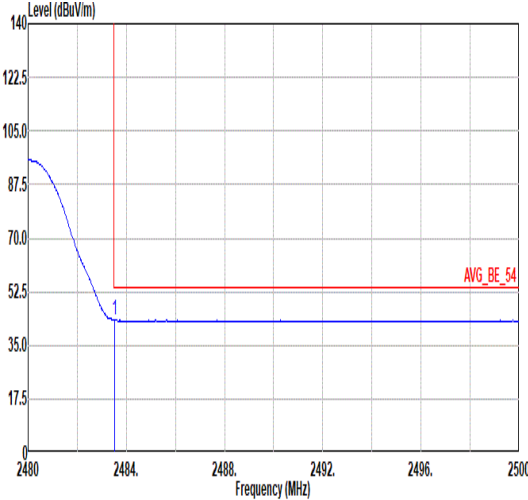
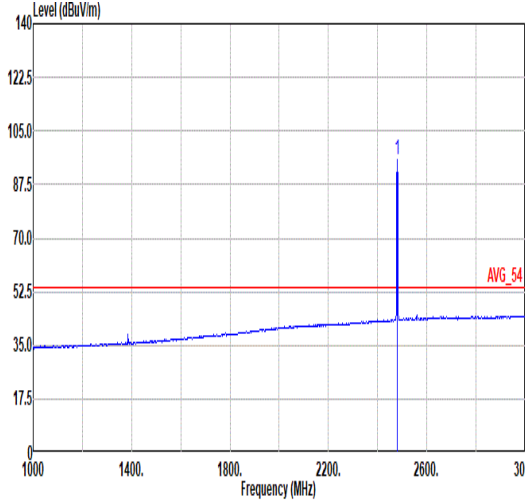


Mode	18																																																			
	Band Edge																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																			
ANT	2																																																			
Pol.	Vertical																																																			
Peak																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.56</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>46.28</td><td>32.40</td><td>8.01</td><td>32.20</td><td>228</td><td>260</td><td>PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2497.56	54.49	74.00	-19.51	46.28	32.40	8.01	32.20	228	260
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	2497.56	54.49	74.00	-19.51	46.28	32.40	8.01	32.20	228	260	PEAK																																									
Fundamental																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.71</td><td>-----</td><td>-----</td><td>89.58</td><td>32.36</td><td>7.98</td><td>32.21</td><td>228</td><td>260</td><td>PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.71	-----	-----	89.58	32.36	7.98	32.21	228	260
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	2480.00	97.71	-----	-----	89.58	32.36	7.98	32.21	228	260	PEAK																																									
Avg																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>35.33</td><td>32.37</td><td>7.99</td><td>32.21</td><td>228</td><td>260</td><td>AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	43.48	54.00	-10.52	35.33	32.37	7.99	32.21	228	260
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	2483.52	43.48	54.00	-10.52	35.33	32.37	7.99	32.21	228	260	AVERAGE																																									
Avg																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.42</td><td>-----</td><td>-----</td><td>87.29</td><td>32.36</td><td>7.98</td><td>32.21</td><td>228</td><td>260</td><td>AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.42	-----	-----	87.29	32.36	7.98	32.21	228	260
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	2480.00	95.42	-----	-----	87.29	32.36	7.98	32.21	228	260	AVERAGE																																									

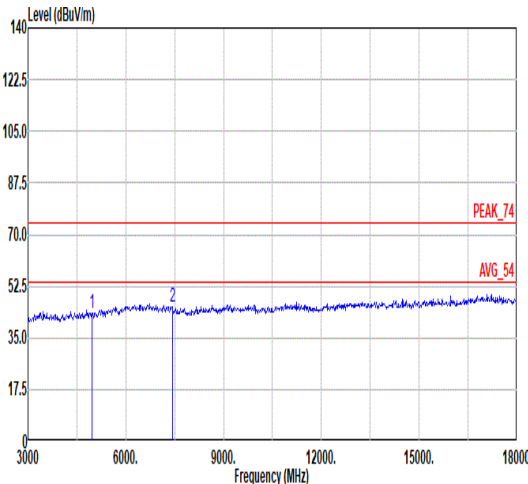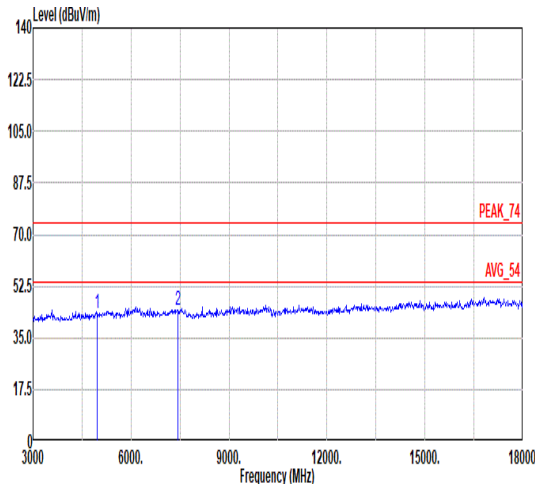

Mode	18																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																	
ANT	2																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>62.78</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.25</td><td>74.00</td><td>-28.75</td><td>60.36</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	43.08	74.00	-30.92	62.78	34.18	10.92	64.80	---	---	Peak	2	7440.00	45.25	74.00	-28.75	60.36	35.52	13.68	64.31	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.24</td><td>74.00</td><td>-30.76</td><td>62.94</td><td>34.18</td><td>10.92</td><td>64.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>59.29</td><td>35.52</td><td>13.68</td><td>64.31</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	43.24	74.00	-30.76	62.94	34.18	10.92	64.80	---	---	Peak	2	7440.00	44.18	74.00	-29.82	59.29	35.52	13.68	64.31	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	43.08	74.00	-30.92	62.78	34.18	10.92	64.80	---	---	Peak																																																																																																																							
2	7440.00	45.25	74.00	-28.75	60.36	35.52	13.68	64.31	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	43.24	74.00	-30.76	62.94	34.18	10.92	64.80	---	---	Peak																																																																																																																							
2	7440.00	44.18	74.00	-29.82	59.29	35.52	13.68	64.31	---	---	Peak																																																																																																																							

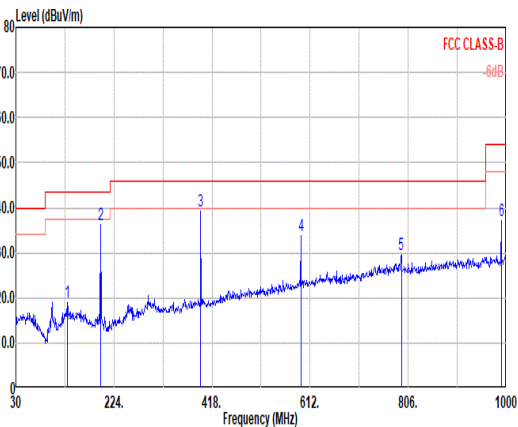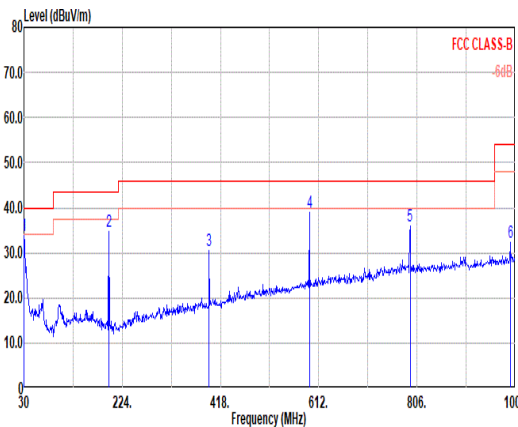


Mode	41																																																																																																																																																																																																																		
	LF																																																																																																																																																																																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																																																																																																		
ANT	1																																																																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																																																																												
QPI/ Peak																																																																																																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>131.85</td><td>19.03</td><td>43.50</td><td>-24.47</td><td>33.92</td><td>17.79</td><td>2.22</td><td>34.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>197.81</td><td>36.36</td><td>43.50</td><td>-7.14</td><td>52.47</td><td>16.07</td><td>2.72</td><td>34.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>395.69</td><td>39.36</td><td>46.00</td><td>-6.64</td><td>49.24</td><td>21.50</td><td>3.32</td><td>34.70</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>593.57</td><td>33.82</td><td>46.00</td><td>-12.18</td><td>38.96</td><td>25.69</td><td>3.58</td><td>34.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>792.42</td><td>29.47</td><td>46.00</td><td>-16.53</td><td>30.93</td><td>28.37</td><td>4.29</td><td>34.12</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>990.30</td><td>37.18</td><td>54.00</td><td>-16.82</td><td>36.62</td><td>29.96</td><td>4.60</td><td>34.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	131.85	19.03	43.50	-24.47	33.92	17.79	2.22	34.90	---	---	Peak	2	197.81	36.36	43.50	-7.14	52.47	16.07	2.72	34.90	---	---	Peak	3	395.69	39.36	46.00	-6.64	49.24	21.50	3.32	34.70	---	---	Peak	4	593.57	33.82	46.00	-12.18	38.96	25.69	3.58	34.41	---	---	Peak	5	792.42	29.47	46.00	-16.53	30.93	28.37	4.29	34.12	---	---	Peak	6	990.30	37.18	54.00	-16.82	36.62	29.96	4.60	34.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>33.70</td><td>40.00</td><td>-6.30</td><td>49.04</td><td>18.07</td><td>1.21</td><td>34.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>197.81</td><td>34.61</td><td>43.50</td><td>-8.89</td><td>50.72</td><td>16.07</td><td>2.72</td><td>34.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>395.69</td><td>30.42</td><td>46.00</td><td>-15.58</td><td>40.30</td><td>21.50</td><td>3.32</td><td>34.70</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>593.57</td><td>39.03</td><td>46.00</td><td>-6.97</td><td>44.17</td><td>25.69</td><td>3.58</td><td>34.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>792.42</td><td>35.97</td><td>46.00</td><td>-10.03</td><td>37.43</td><td>28.37</td><td>4.29</td><td>34.12</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>990.30</td><td>32.28</td><td>54.00</td><td>-21.72</td><td>31.72</td><td>29.96</td><td>4.60</td><td>34.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	33.70	40.00	-6.30	49.04	18.07	1.21	34.62	---	---	Peak	2	197.81	34.61	43.50	-8.89	50.72	16.07	2.72	34.90	---	---	Peak	3	395.69	30.42	46.00	-15.58	40.30	21.50	3.32	34.70	---	---	Peak	4	593.57	39.03	46.00	-6.97	44.17	25.69	3.58	34.41	---	---	Peak	5	792.42	35.97	46.00	-10.03	37.43	28.37	4.29	34.12	---	---	Peak	6	990.30	32.28	54.00	-21.72	31.72	29.96	4.60	34.00	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																										
1	131.85	19.03	43.50	-24.47	33.92	17.79	2.22	34.90	---	---	Peak																																																																																																																																																																																																								
2	197.81	36.36	43.50	-7.14	52.47	16.07	2.72	34.90	---	---	Peak																																																																																																																																																																																																								
3	395.69	39.36	46.00	-6.64	49.24	21.50	3.32	34.70	---	---	Peak																																																																																																																																																																																																								
4	593.57	33.82	46.00	-12.18	38.96	25.69	3.58	34.41	---	---	Peak																																																																																																																																																																																																								
5	792.42	29.47	46.00	-16.53	30.93	28.37	4.29	34.12	---	---	Peak																																																																																																																																																																																																								
6	990.30	37.18	54.00	-16.82	36.62	29.96	4.60	34.00	---	---	Peak																																																																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																										
1	30.00	33.70	40.00	-6.30	49.04	18.07	1.21	34.62	---	---	Peak																																																																																																																																																																																																								
2	197.81	34.61	43.50	-8.89	50.72	16.07	2.72	34.90	---	---	Peak																																																																																																																																																																																																								
3	395.69	30.42	46.00	-15.58	40.30	21.50	3.32	34.70	---	---	Peak																																																																																																																																																																																																								
4	593.57	39.03	46.00	-6.97	44.17	25.69	3.58	34.41	---	---	Peak																																																																																																																																																																																																								
5	792.42	35.97	46.00	-10.03	37.43	28.37	4.29	34.12	---	---	Peak																																																																																																																																																																																																								
6	990.30	32.28	54.00	-21.72	31.72	29.96	4.60	34.00	---	---	Peak																																																																																																																																																																																																								

Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	Bluetooth LE 125Kbps	97.31	17.02	0.059	100Hz
1	Bluetooth LE 500Kbps	90.80	4.54	0.220	300Hz
1	Bluetooth LE 1Mbps	84.80	2.12	0.472	1KHz
1	Bluetooth LE 2Mbps	56.91	1.07	0.935	1KHz
2	Bluetooth LE 125Kbps	97.38	17.08	0.059	100Hz
2	Bluetooth LE 500Kbps	90.64	4.55	0.220	300Hz
2	Bluetooth LE 1Mbps	84.80	2.12	0.472	1KHz
2	Bluetooth LE 2Mbps	56.91	1.07	0.935	1KHz

<Ant. 1>


Bluetooth – LE 125Kbps

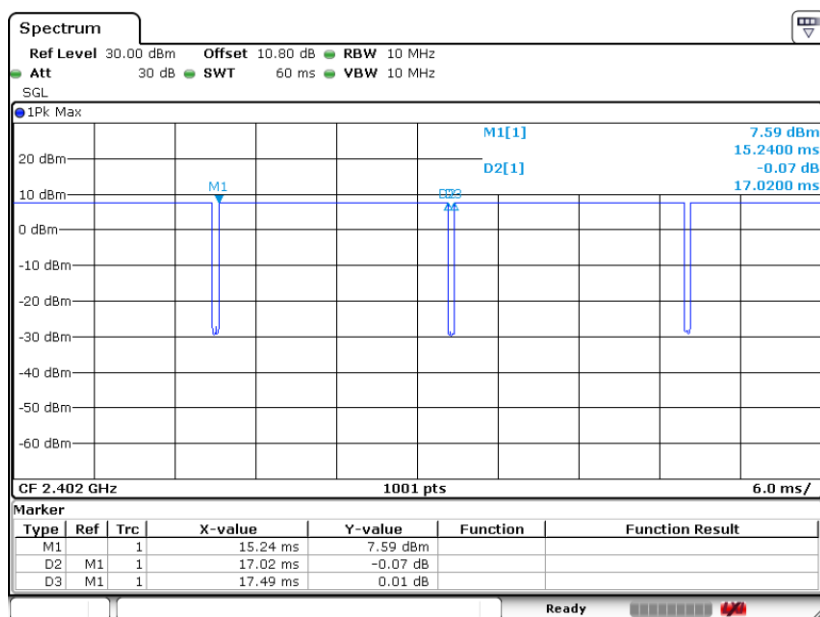


Bluetooth – LE 500Kbps

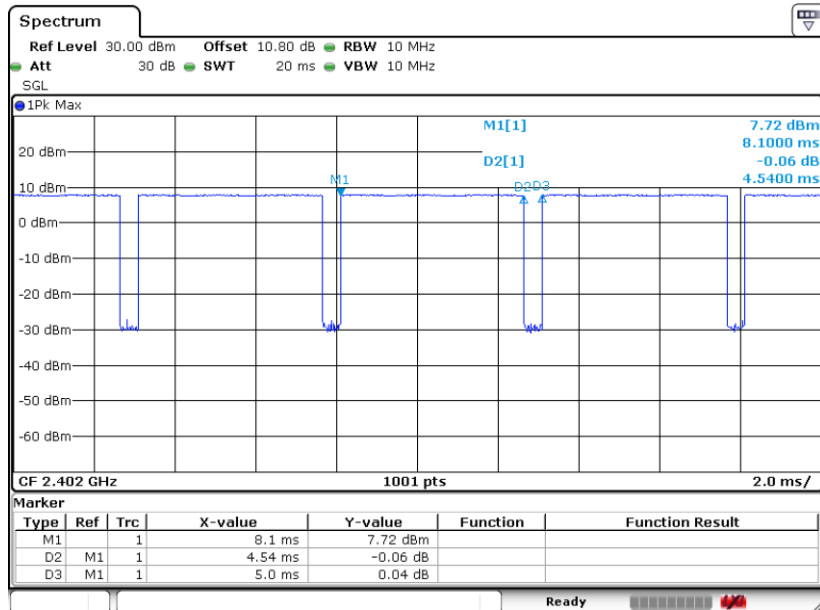

Bluetooth – LE 1Mbps

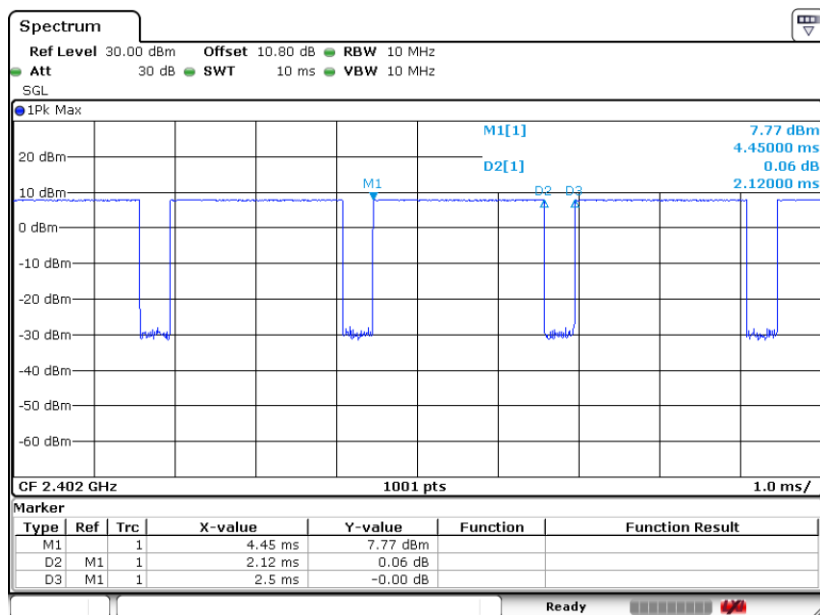


Bluetooth – LE 2Mbps

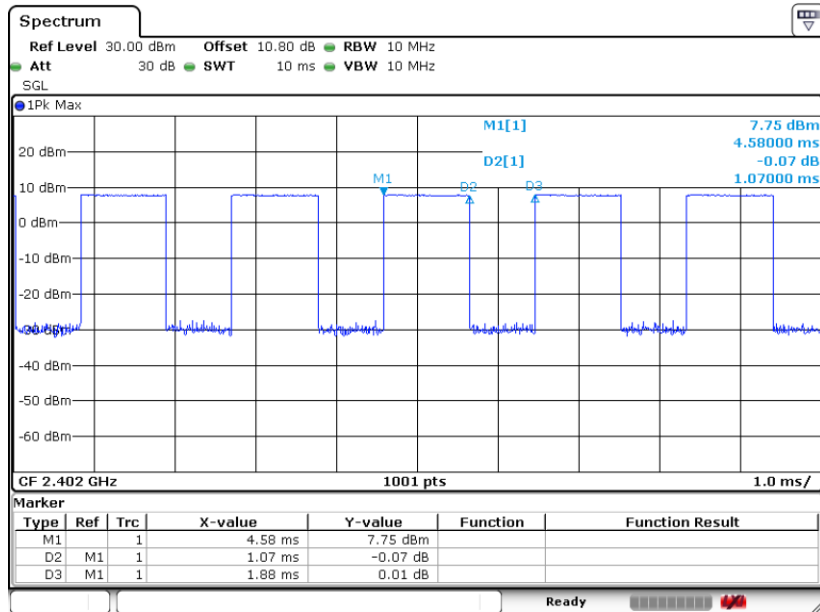


<Ant. 2>


Bluetooth – LE 125Kbps

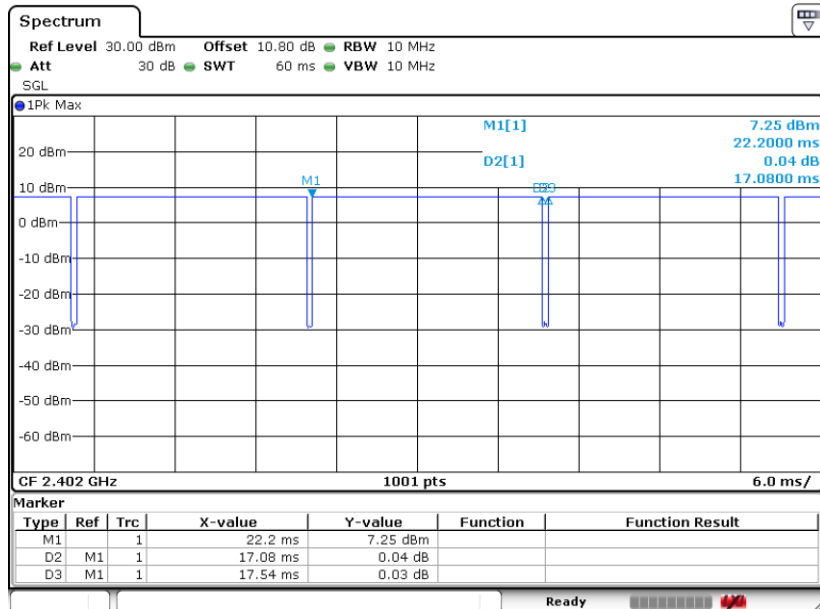

Bluetooth – LE 500Kbps

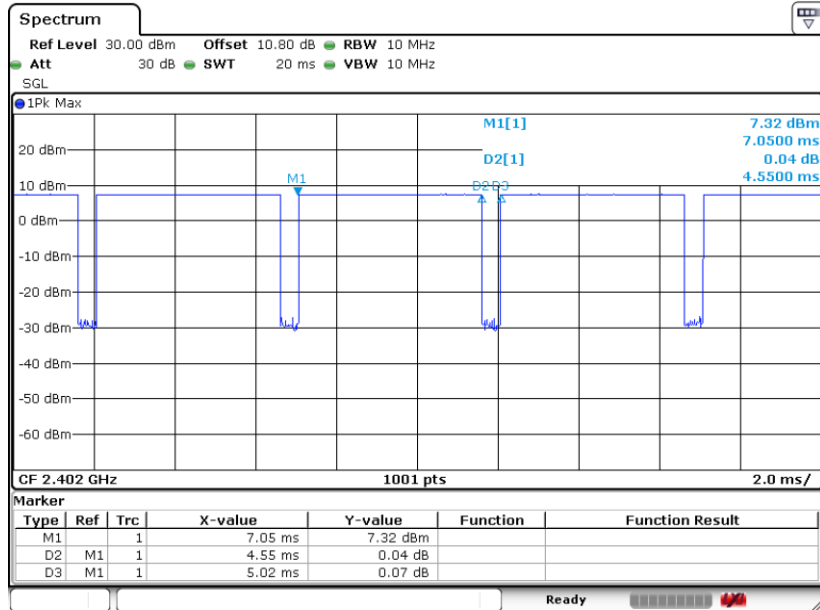

Bluetooth – LE 1Mbps

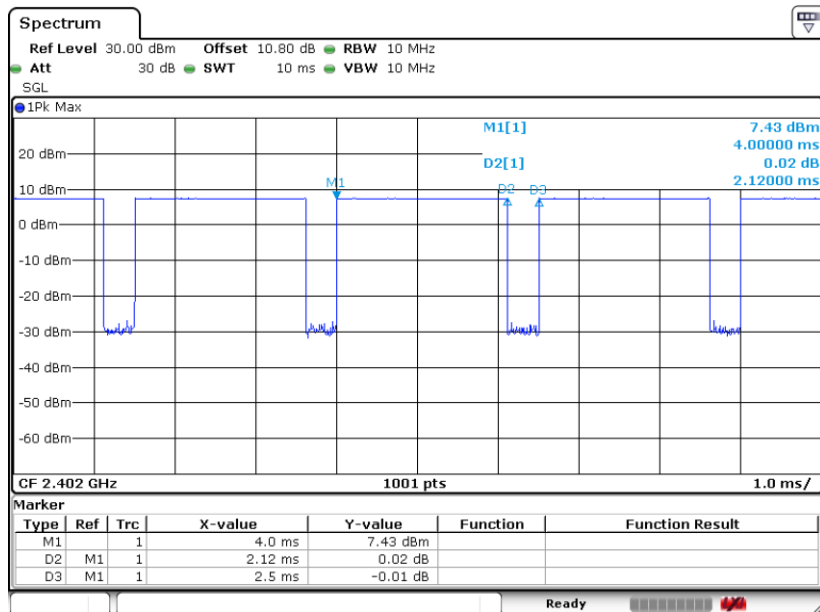



Bluetooth – LE 2Mbps

