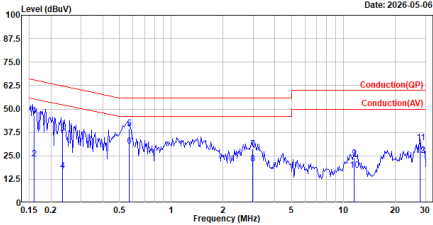
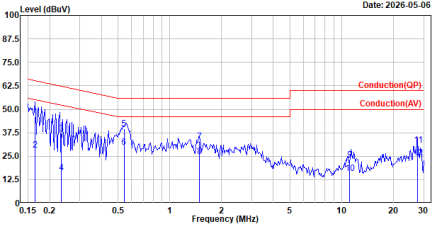


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line								TX_BLE2M_2440MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BLE2M_2440MHz test by :Kevin  Date: 2026-05-06								Site :HY-SR01 Condition :Neutral Mode :TX_BLE2M_2440MHz test by :Kevin  Date: 2026-05-06							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.160	46.48	65.47	-18.99	36.85	9.63	QP	1	0.164	45.95	65.25	-19.30	36.31	9.64	QP
2	0.160	23.30	55.47	-32.17	13.67	9.63	Average	2	0.164	28.48	55.25	-26.77	18.84	9.64	Average
3	0.234	37.08	62.29	-25.21	27.44	9.64	QP	3	0.235	37.01	62.27	-25.26	27.36	9.65	QP
4	0.234	17.03	52.29	-35.26	7.39	9.64	Average	4	0.235	16.41	52.27	-35.86	6.76	9.65	Average
5	0.572	35.79	56.00	-16.21	30.13	9.66	QP	5	0.542	39.77	56.00	-16.23	30.12	9.65	QP
6	0.572	30.30	46.00	-15.70	20.64	9.66	Average	6	0.542	29.92	46.00	-16.08	20.27	9.65	Average
7	2.966	28.70	56.00	-27.30	18.81	9.89	QP	7	1.488	32.94	56.00	-23.06	23.26	9.68	QP
8	2.966	20.83	46.00	-25.17	10.94	9.89	Average	8	1.488	25.04	46.00	-20.96	15.36	9.68	Average
9	11.562	23.68	60.00	-36.32	13.61	10.07	QP	9	11.150	23.00	60.00	-37.00	12.90	10.10	QP
10	11.562	17.31	50.00	-32.69	7.24	10.07	Average	10	11.150	15.71	50.00	-34.29	5.61	10.10	Average
11	27.910	32.06	60.00	-27.94	22.24	9.82	QP	11	27.687	31.08	60.00	-28.92	21.21	9.87	QP
12	27.910	25.12	50.00	-24.88	15.30	9.82	Average	12	27.687	24.00	50.00	-26.00	14.13	9.87	Average


Note:
 1. Level = Read Level + Factor
 2. Factor = LISN insertion loss + Cable loss
 3. Over Limit = Level - Limit Line

Note:
 1. Level = Read Level + Factor
 2. Factor = LISN insertion loss + Cable loss
 3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.70	≥ 0.50	Pass
	2440	0.72	≥ 0.50	Pass
	2480	0.69	≥ 0.50	Pass
GFSK (2Mbps)	2402	1.13	≥ 0.50	Pass
	2440	1.13	≥ 0.50	Pass
	2480	1.14	≥ 0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

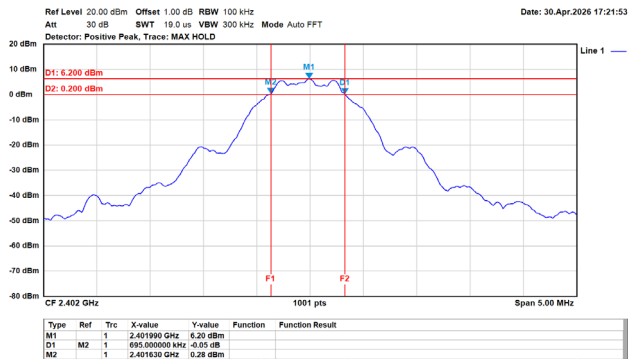


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

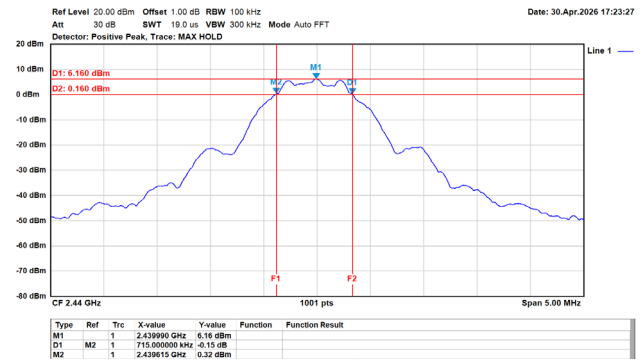


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

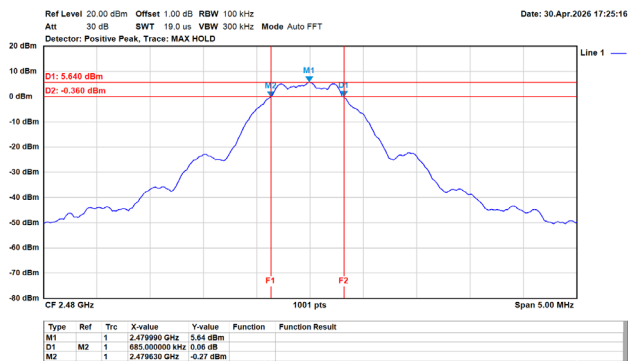


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

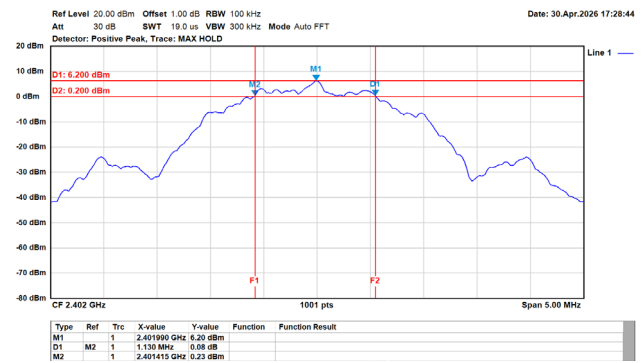

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

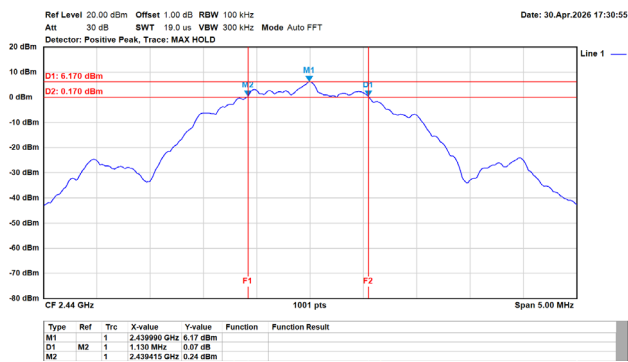

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

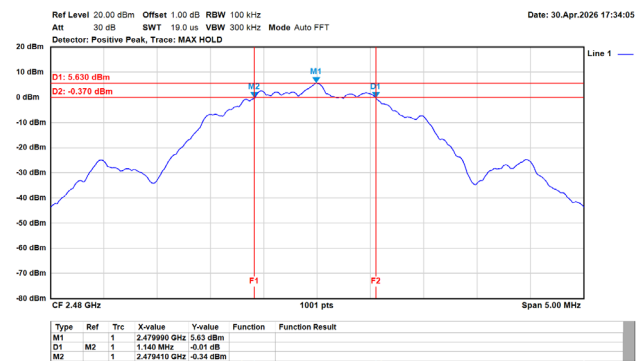


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	7.19	30.00	Pass
	2440	6.91	30.00	Pass
	2480	6.52	30.00	Pass
GFSK (2Mbps)	2402	7.20	30.00	Pass
	2440	6.93	30.00	Pass
	2480	6.55	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-9.79	8.00	Pass
	2440	-9.70	8.00	Pass
	2480	-10.23	8.00	Pass
GFSK (2Mbps)	2402	-11.90	8.00	Pass
	2440	-11.79	8.00	Pass
	2480	-12.09	8.00	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

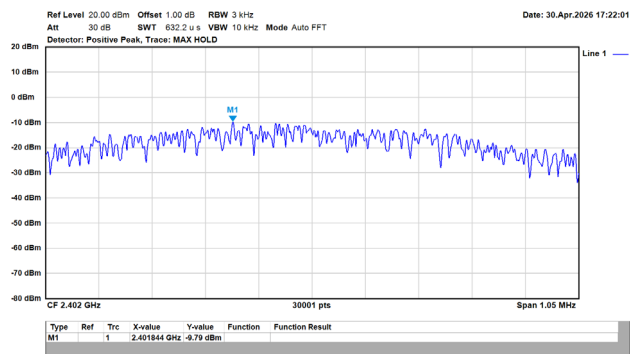


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

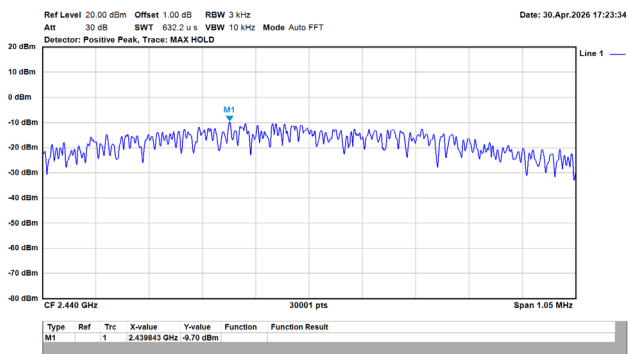


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

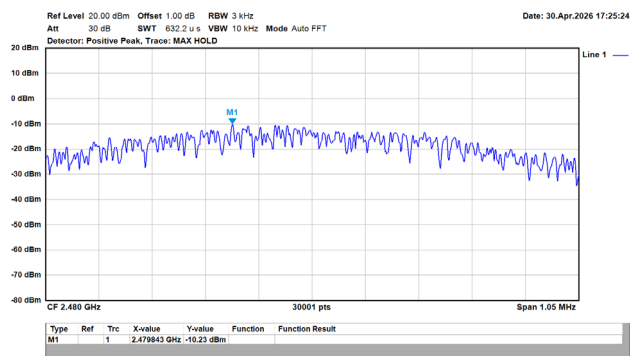


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

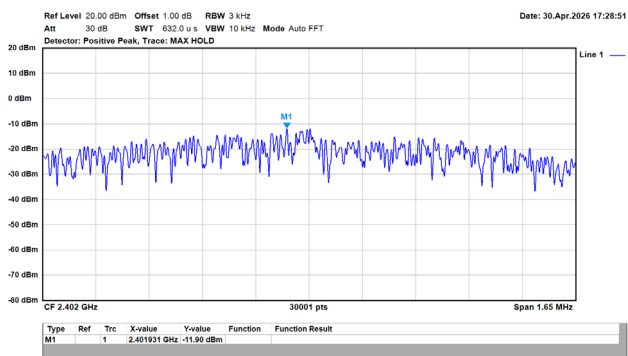

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

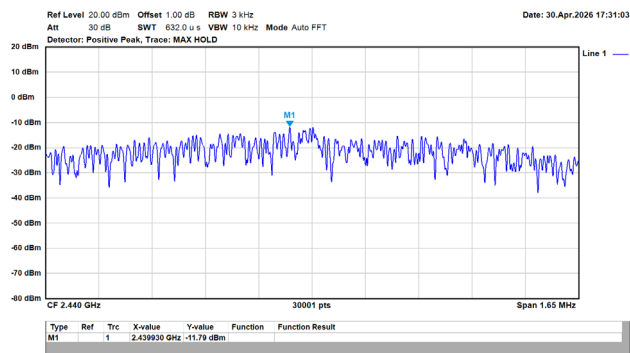


GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

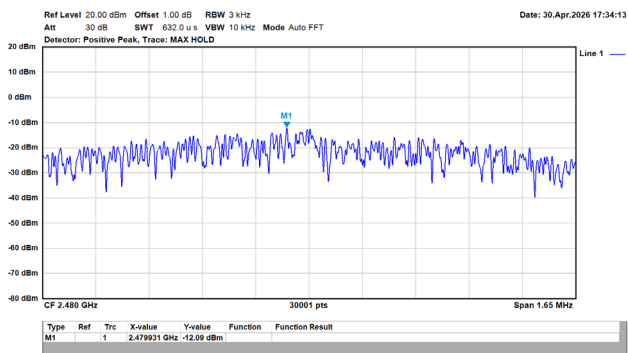


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1 (Ref.)

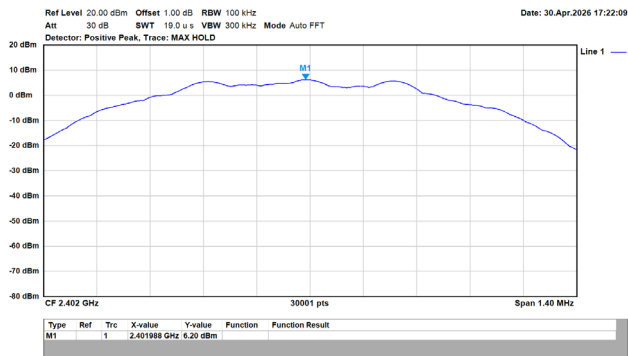


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

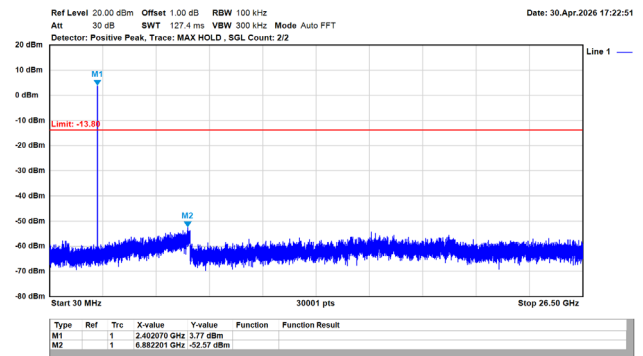


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1 (Ref.)

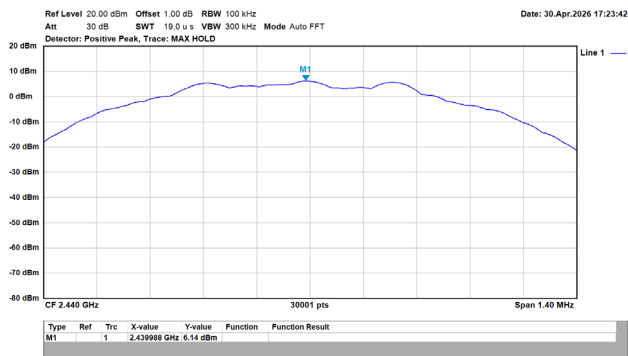


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

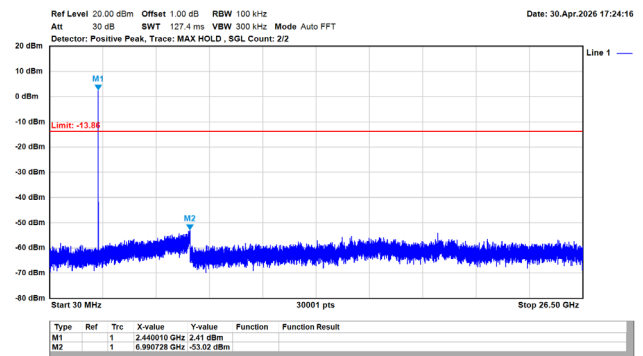


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1 (Ref.)

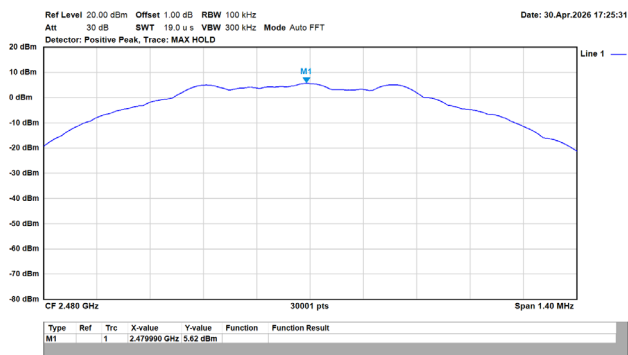


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

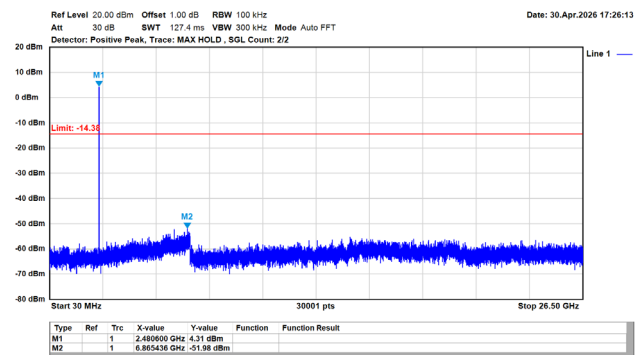


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1 (Ref.)

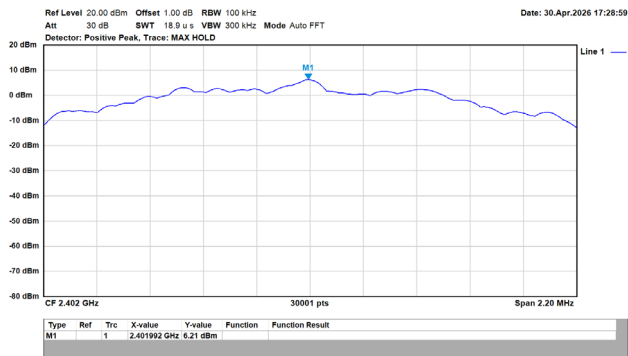


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

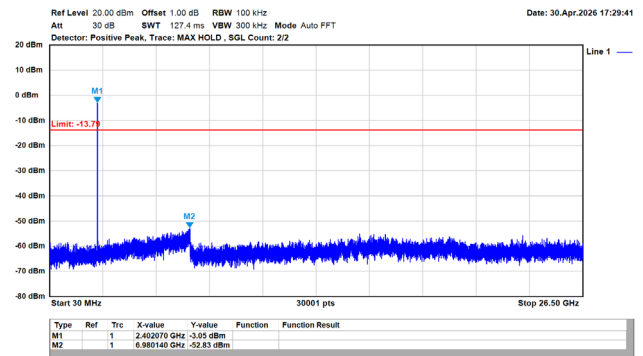


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1 (Ref.)

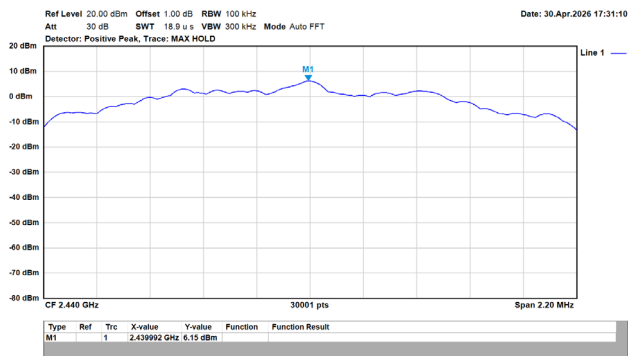


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

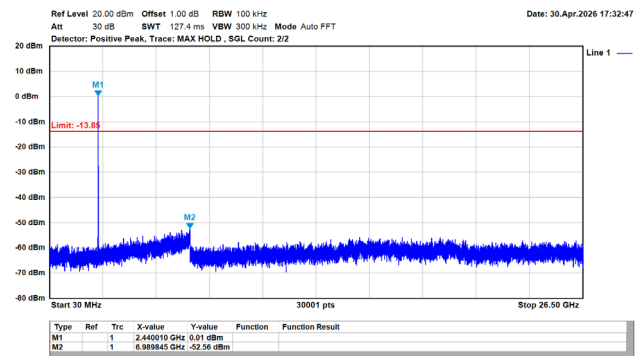


GFSK/2MHz/2M/2480MHz/Ch39/Ant.1 (Ref.)

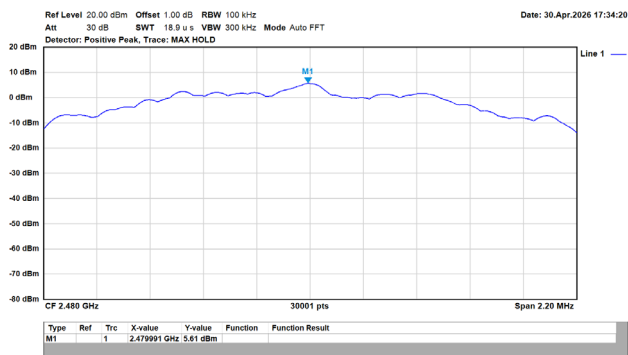

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

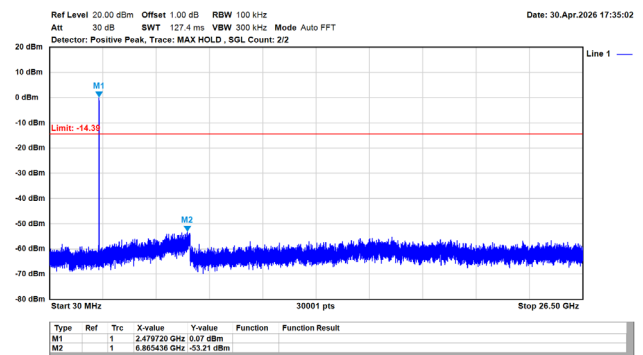

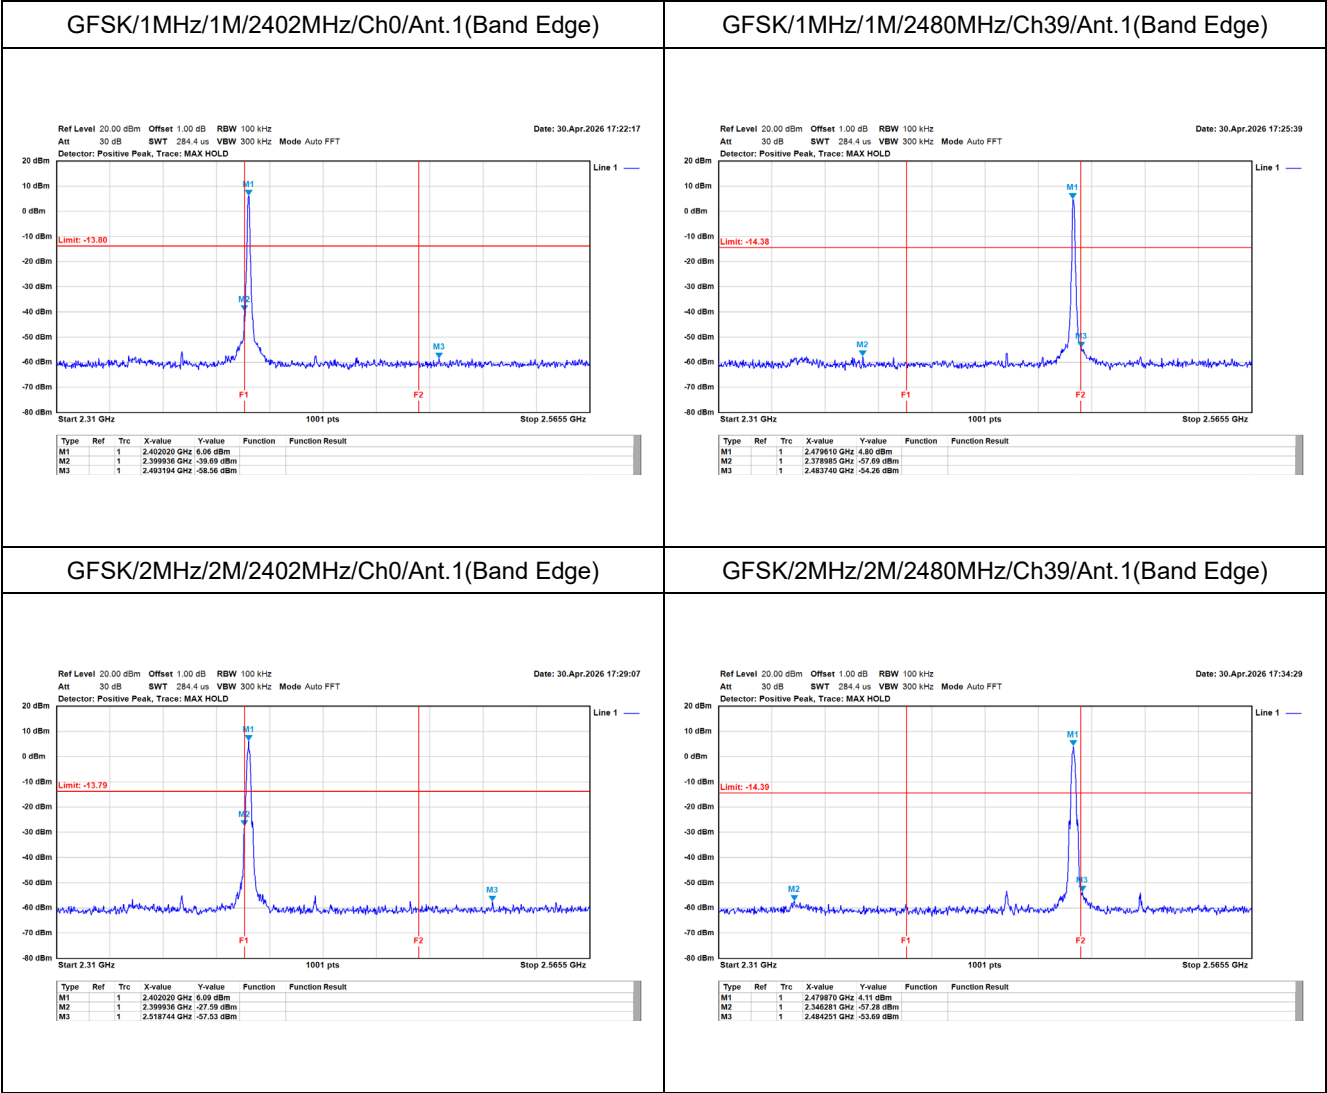


Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H	TX_BLE1M_2402MHz_V
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_BLE1M_2402MHz TEST BY :Caster Level (dBuV/m) <	

TX_BLE1M_2480MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

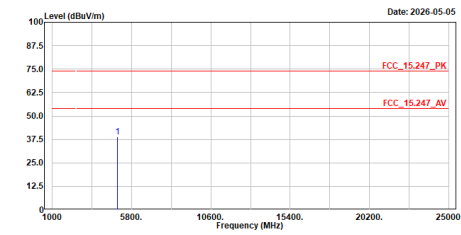


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	38.87	74.00	-35.13	53.44	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

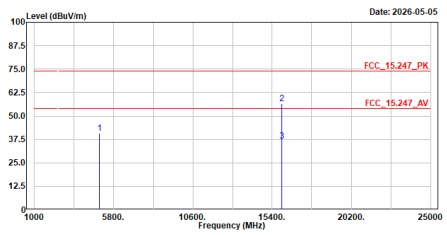


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	40.86	74.00	-33.14	55.43	-14.57	Peak
2	15975.530	56.77	74.00	-17.23	60.26	-3.49	Peak
3	15975.530	36.63	54.00	-17.37	40.12	-3.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

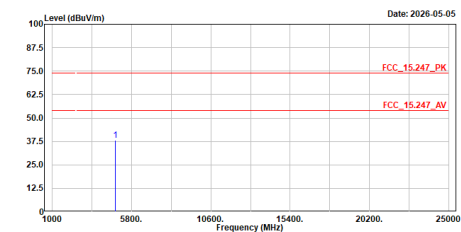


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	38.19	74.00	-35.81	53.02	-14.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

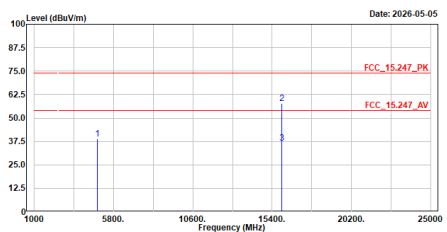


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	39.03	74.00	-34.97	53.86	-14.83	Peak
2	16000.560	57.58	74.00	-16.42	61.13	-3.55	Peak
3	16000.560	36.49	54.00	-17.51	40.04	-3.55	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2440MHz
TEST BY :Caster

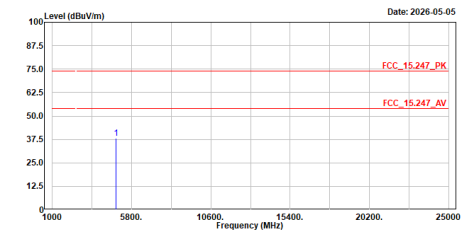


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	38.22	74.00	-35.78	53.02	-14.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2440MHz
TEST BY :Caster

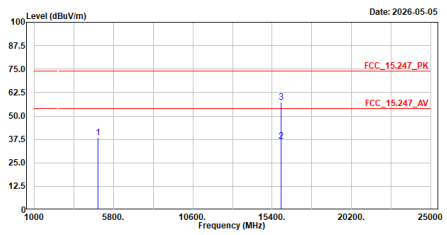


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	38.65	74.00	-35.35	53.45	-14.80	Peak
2	15944.830	36.78	54.00	-17.22	40.22	-3.44	Average
3	15944.830	57.53	74.00	-16.47	60.97	-3.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

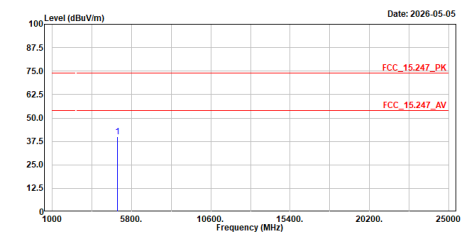


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	39.82	74.00	-34.18	54.39	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

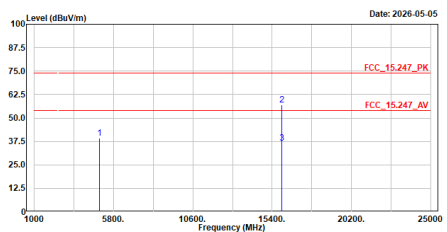


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	39.29	74.00	-34.71	53.86	-14.57	Peak
2	16000.560	56.89	74.00	-17.11	60.44	-3.55	Peak
3	16000.560	36.79	54.00	-17.21	40.34	-3.55	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2440MHz
TEST BY :Caster

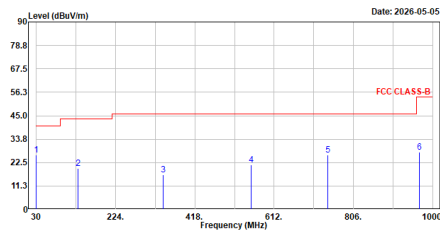


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.550	26.18	40.00	-13.82	51.30	-25.12	QP
2	131.505	19.67	43.50	-23.83	45.02	-25.35	QP
3	340.866	16.62	46.00	-29.38	38.88	-22.26	QP
4	555.977	21.36	46.00	-24.64	38.65	-17.29	QP
5	742.587	26.20	46.00	-19.80	39.58	-13.38	QP
6	967.398	27.68	54.00	-26.32	38.55	-10.87	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2440MHz
TEST BY :Caster

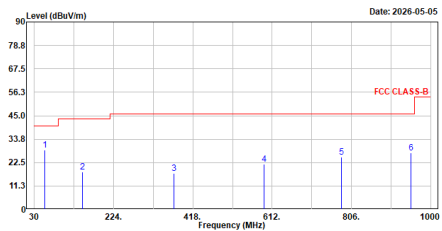


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	55.451	28.62	40.00	-11.38	52.62	-24.00	QP
2	148.506	17.98	43.50	-25.52	42.04	-24.06	QP
3	371.318	17.42	46.00	-28.58	38.86	-21.44	QP
4	591.629	21.75	46.00	-24.25	37.94	-16.19	QP
5	782.289	25.17	46.00	-20.83	38.17	-13.00	QP
6	951.048	27.20	46.00	-18.80	38.21	-11.01	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2402MHz
TEST BY :Caster

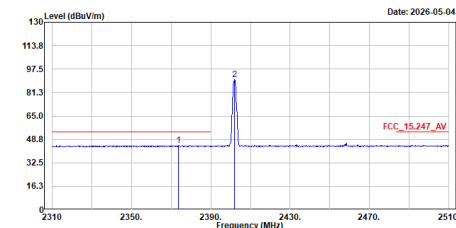


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2373.000	44.51	54.00	-9.49	14.59	29.92	Average
2	2402.000	90.35	-----	-----	60.37	29.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2402MHz
TEST BY :Caster

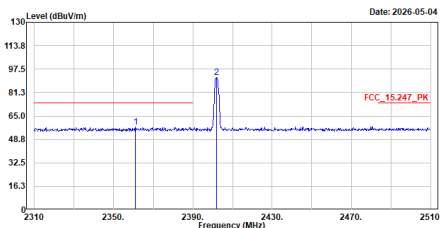


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2361.000	57.37	74.00	-16.63	27.50	29.87	Peak
2	2401.000	91.50	-----	-----	61.52	29.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2402MHz
TEST BY :Caster

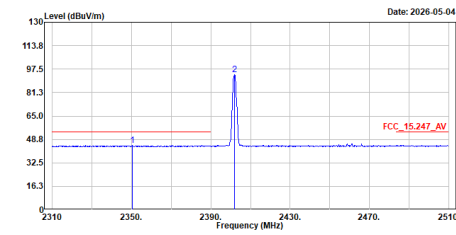


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2350.400	44.45	54.00	-9.55	14.48	29.97	Average
2	2402.000	93.85	-----	-----	63.87	29.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2402MHz
TEST BY :Caster

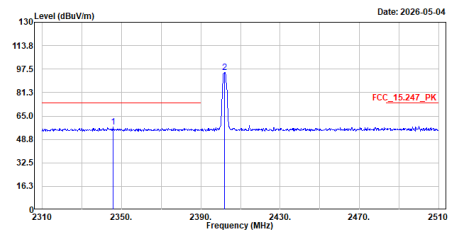


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2345.600	57.58	74.00	-16.42	27.62	29.96	Peak
2	2401.800	94.95	-----	-----	64.97	29.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

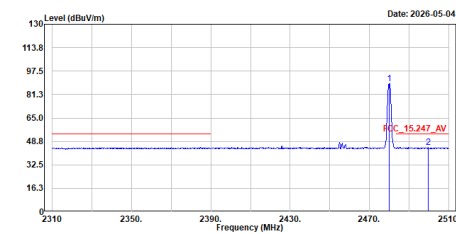


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	88.96	54.00	-9.49	59.01	29.95	Average
2	2499.600	44.51	-----	-----	14.65	29.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

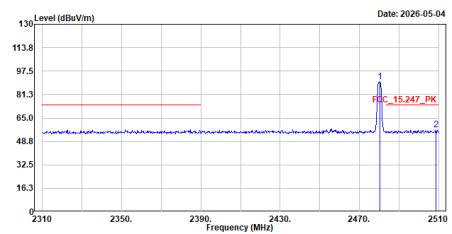


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	90.05	74.00	-17.13	60.10	29.95	Peak
2	2508.600	56.87	-----	-----	27.01	29.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

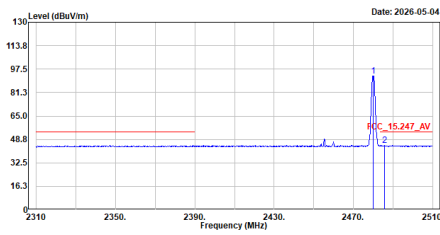


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	92.91	-----	-----	62.96	29.95	Average
2	2485.600	44.46	54.00	-9.54	14.57	29.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz
TEST BY :Caster

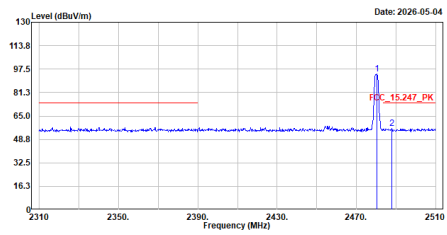


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	93.94	-----	-----	63.99	29.95	Peak
2	2488.000	56.40	74.00	-17.60	26.52	29.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

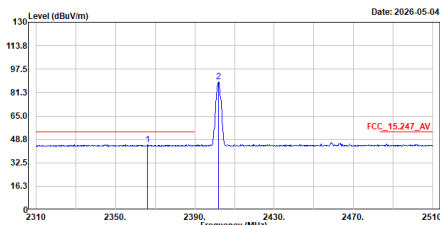


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2366.200	45.17	54.00	-8.83	15.29	29.88	Average
2	2402.000	88.68	-----	-----	58.70	29.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

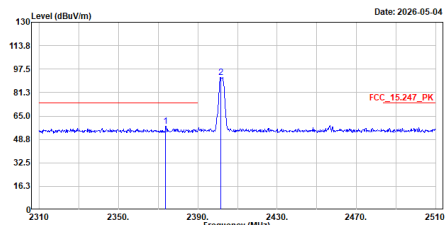


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2373.800	57.96	74.00	-16.04	28.04	29.92	Peak
2	2401.600	91.52	-----	-----	61.54	29.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

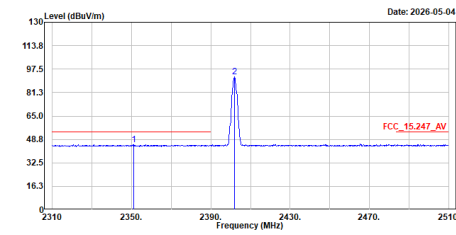


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2351.200	45.12	54.00	-8.88	15.16	29.96	Average
2	2402.000	92.08	-----	-----	62.10	29.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2402MHz
TEST BY :Caster

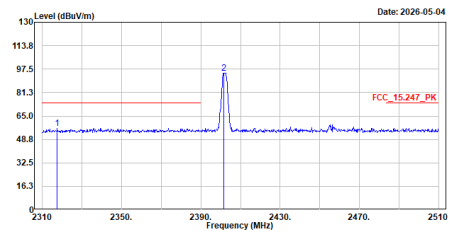


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2317.600	56.65	74.00	-17.35	26.82	29.83	Peak
2	2401.600	94.90	-----	-----	64.92	29.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

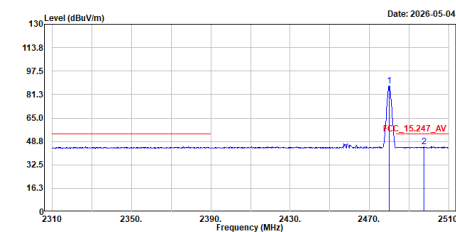


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	87.18	-----	-----	57.23	29.95	Average
2	2497.600	45.36	54.00	-8.64	15.50	29.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

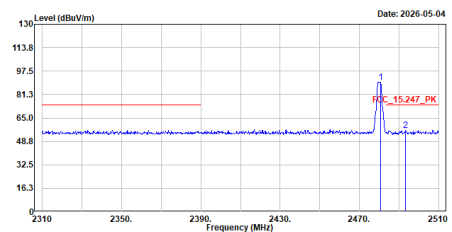


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.600	89.92	-----	-----	59.98	29.94	Peak
2	2493.200	56.52	74.00	-17.48	26.66	29.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

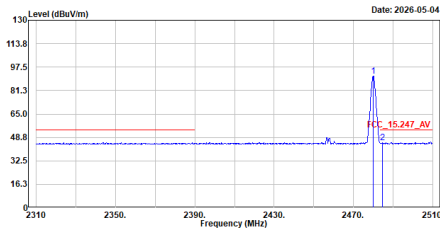


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2480.000	91.18	-----	-----	61.23	29.95	Average
2	2484.600	45.16	54.00	-8.84	15.26	29.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_BLE2M_2480MHz
TEST BY :Caster

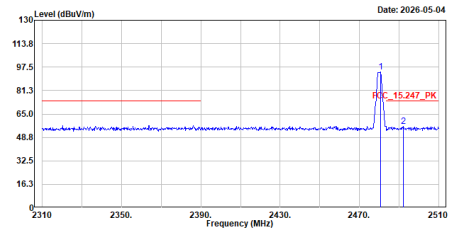


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2480.600	93.97	-----	-----	64.03	29.94	Peak
2	2492.000	56.21	74.00	-17.79	26.35	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Charge mode_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Charge mode
TEST BY :Caster

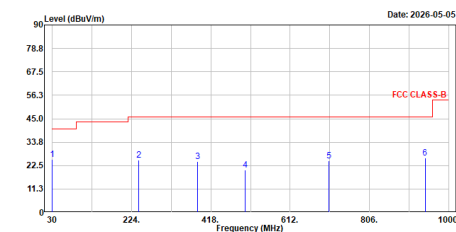


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	30.450	25.54	40.00	-14.46	50.64	-25.10	QP
2	240.911	24.99	46.00	-21.01	50.23	-25.24	QP
3	385.568	24.58	46.00	-21.42	45.50	-20.92	QP
4	591.824	20.21	46.00	-25.79	38.58	-18.37	QP
5	705.235	24.91	46.00	-21.09	39.14	-14.23	QP
6	942.197	26.31	46.00	-19.69	37.50	-11.19	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Charge mode_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Charge mode
TEST BY :Caster

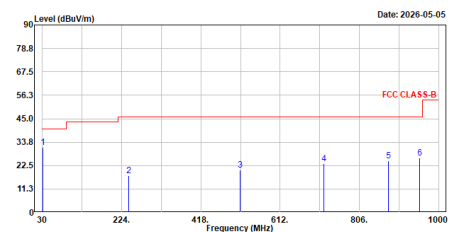

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	30.700	31.35	40.00	-8.65	56.48	-25.13	QP
2	240.961	17.80	46.00	-28.20	43.04	-25.24	QP
3	513.425	20.48	46.00	-25.52	38.42	-17.94	QP
4	718.936	23.39	46.00	-22.61	37.35	-13.96	QP
5	876.804	24.65	46.00	-21.35	36.73	-12.08	QP
6	953.348	26.11	46.00	-19.89	37.07	-10.96	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.