

FCC DFS Test Report

FCC ID : XPYMAYAW4A

Equipment : Host-based multi-radio modules with Wi-Fi 6,
Bluetooth Low Energy 5.4 and 802.15.4

Brand Name : u-blox

Model Name : MAYA-W476-00B, MAYA-W466-00B, MAYA-W446-00B,
MAYA-W436-00B, MAYA-W473-00B, MAYA-W463-00B,
MAYA-W443-00B, MAYA-W433-00B, MAYA-W476-10B,
MAYA-W466-10B, MAYA-W446-10B, MAYA-W436-10B,
MAYA-W473-10B, MAYA-W463-10B, MAYA-W443-10B,
MAYA-W433-10B

Applicant : u-Blox AG
Zürcherstrasse 68, 8800 Thalwil Switzerland

Manufacturer : u-Blox AG
Zürcherstrasse 68, 8800 Thalwil Switzerland

Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 28, 2024, and testing was started from Dec. 23, 2024 and completed on Dec. 23, 2024. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	12
1.3 Testing Location Information	12
2 TEST CONFIGURATION OF EUT.....	13
2.1 Test Channel Frequencies Configuration.....	13
2.2 The Worst Case Measurement Configuration.....	13
2.3 Support Equipment.....	13
3 DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	14
3.1 General DFS Information	14
3.2 Radar Test Waveform Calibration	16
3.3 In-service Monitoring	23
4 TEST EQUIPMENT AND CALIBRATION DATA	28
5 MEASUREMENT UNCERTAINTY	29

Appendix A. Test Photos

Photographs of EUT V01

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	PASS	CMT ≤ 10sec
3.3	KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	PASS	CCTT ≤ 60 ms starting at CMT 200ms
3.3	KDB 905462 7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	PASS	NOP ≥ 30 min

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to perform.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and explanations:
None

Reviewed by: Ben Tseng

Report Producer: Amber Chiu

1 General Description

1.1 Information

1.1.1 RF General Information

Specification Items	Description			
Product Type	WLAN (1TX, 1RX)			
Radio Type	Intentional Transceiver			
Power Type	From host system			
Modulation	IEEE 802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11n/ac/ax: see the below table			
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac/ax: see the below table			
Channel Bandwidth	20 MHz operating channel bandwidth			
Operating Mode	☐	Master		
	☐	Client with radar detection		
	☒	Client without radar detection		
Communication Mode	☒	IP Based (Load Based)	☐	Frame Based
TPC Function	☒	With TPC	☐	Without TPC
Weather Band (5600~5650MHz)	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Resource Unit	☒	Full RU	☐	Partial RU
	☐	MRU (static preamble puncturing)	☐	MRU (dynamic preamble puncturing)
Power-on cycle	NA (No Channel Availability Check Function)			
Software / Firmware Version	Linux version 6.6.3-lts-next-gec619b70d6b4 (oe-user@oe-host) (aarch64-poky-linux-gcc (GCC) 13.2.0, GNU ld (GNU Binutils) 2.41.0.20230926) #1 SMP PREEMPT Thu Feb 29 08:37:44 UTC 2024			
Note: EUT employ a TPC mechanism and TPC have the capability to operate at least 6 dB below highest RF output power.				

Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.:
☐	Other:

Antenna & Bandwidth

Antenna	One (TX)			
Band width Mode	20 MHz	40 MHz	80 MHz	160 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11n	V	X	X	X
IEEE 802.11ac	V	X	X	X
IEEE 802.11ax	V	X	X	X

IEEE 11n/ac/ax Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11ac (VHT20)	1	MCS 0-8/Nss1
802.11ax (HEW20)	1	MCS 0-9/Nss1

Note 1: IEEE Std. 802.11n modulation consists of HT20 (HT: High Throughput). Then EUT support HT20.

Note 2: HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

Note 3: IEEE Std. 802.11ac modulation consists of VHT20 (VHT: Very High Throughput). Then EUT support VHT20.

Note 4: VHT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

Note 5: HEW20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.

Note 6: Modulation modes consist of below configuration:
11a: IEEE 802.11a, HT20: IEEE 802.11n, VHT20: IEEE 802.11ac, HEW20: IEEE 802.11ax.

1.1.2 Antenna Information

Model Name : MAYA-W476-00B,MAYA-W466-00B,MAYA-W446-00B,MAYA-W436-00B, MAYA-W476-10B, MAYA-W466-10B, MAYA-W446-10B, MAYA-W436-10B				
Integrated PCB Antenna				
Ant.	Brand	Model Name	Antenna Type	Support
1	U-Blox	MAYA-W4 PCB	PCB Antenna	2.4G+5G+BLE+802.15.4

Ant.	Gain (dBi)							
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-4	BT	802.15.4
1	1.56	-1.74	1.56	1.56	-2.23	-0.95	1.56	1.56

For 2.4GHz function:

For IEEE 802.11 b/g/n/ax mode (1TX/1RX)

Ant. 1 could transmit/receive.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (1TX/1RX)

Ant. 1 could transmit/receive.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 could transmit/receive.

For Zigbee function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 1 could transmit/receive.

Model Name : MAYA-W473-00B, MAYA-W463-00B, MAYA-W443-00B, MAYA-W433-00B MAYA-W473-10B, MAYA-W463-10B, MAYA-W443-10B, MAYA-W433-10B				
External Antenna				
Ant.	Brand	Model Name	Antenna Type	Support
1	Linx	ANT-DB1-RAF-RPS	Dual-band dipole antenna	2.4G+5G+BLE+802.15.4
2	Chang Hong	DA-2458-02-SMR	Dual-band dipole antenna	2.4G+5G+BLE+802.15.4
3	Laird	001-0012	Dual-band dipole antenna	2.4G+5G+BLE+802.15.4
4	Taoglas	GW.59.3153	Dual-band dipole antenna	2.4G+5G+BLE+802.15.4
5	Laird	MAF94051	Dual-band dipole antenna	2.4G+5G+BLE+802.15.4
6	Unictron	H2B1PD1A1C385L	PCB antenna	2.4G+5G+BLE+802.15.4
7	Molex	1461530050	PCB antenna	2.4G+5G+BLE+802.15.4
8	Molex	2042810100	PCB antenna	2.4G+5G+BLE+802.15.4

Ant.	Gain (dBi)							
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-4	BT	802.15.4
1	4.1	5.1	5.1	5.1	5.1	5.1	4.1	4.1
2	2.85	1.52	0.36	1.35	2.17	1.49	2.85	2.85
3	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
4	3.8	5.3	5.3	5.3	5.3	5.3	3.8	3.8
5	2.1	2.6	2.6	2.6	2.6	3.4	2.1	2.1
6	2.7	3.5	3.5	3.5	3.5	3.5	2.7	2.7
7	3.2	4.25	4.25	4.25	4.25	4.25	3.2	3.2
8	2.0	3.3	3.3	3.3	3.3	3.3	2.0	2.0

For 2.4GHz function:

For IEEE 802.11 b/g/n/ax mode (1TX/1RX)

Ant. 1 ~ Ant. 8 could transmit/receive.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (1TX/1RX)

Ant. 1 ~ Ant. 8 could transmit/receive.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 ~ Ant. 8 could transmit/receive.

For Zigbee function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 1 ~ Ant. 8 could transmit/receive.

1.1.3 DFS Band Carrier Frequencies

There are one bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz U-NII-2A	52	5260 MHz	60	5300 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz U-NII-2C	100	5500 MHz	124	5620 MHz
	104	5520 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	112	5560 MHz	136	5680 MHz
	116	5580 MHz	140	5700 MHz
	120	5600 MHz	144	5720 MHz

1.1.4 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description	Chipset used	Radio Technologies	Antenna Type	Antenna item
MAYA-W476-00B	Product with integrated antenna	NXP IW610G	2.4G+5G Wi-Fi, BLE, 802.15.4	PCB Antenna	W9
MAYA-W466-00B	Product with integrated antenna	NXP IW610F	2.4G+5G Wi-Fi, BLE	PCB Antenna	W9
MAYA-W446-00B	Product with integrated antenna	NXP IW610C	2.4G Wi-Fi, BLE, 802.15.4	PCB Antenna	W9
MAYA-W436-00B	Product with integrated antenna	NXP IW610B	2.4G Wi-Fi, BLE	PCB Antenna	W9
MAYA-W473-00B	Product with antenna pin	NXP IW610G	2.4G+5G Wi-Fi, BLE, 802.15.4	External Antenna Dual-Band dipole Antenna or External PCB Antenna	W1~8
MAYA-W463-00B	Product with antenna pin	NXP IW610F	2.4G+5G Wi-Fi, BLE	External Antenna Dual-Band dipole Antenna or External PCB Antenna	W1~8
MAYA-W443-00B	Product with antenna pin	NXP IW610C	2.4G Wi-Fi, BLE, 802.15.4	External Antenna Dual-Band dipole Antenna or External PCB Antenna	W1~8
MAYA-W433-00B	Product with antenna pin	NXP IW610B	2.4G Wi-Fi, BLE	External Antenna Dual-Band dipole Antenna or External PCB Antenna	W1~8
MAYA-W476-10B	Product with integrated antenna	NXP IW610G	2.4G+5G Wi-Fi, BLE, 802.15.4	PCB Antenna	W9
MAYA-W466-10B	Product with integrated antenna	NXP IW610F	2.4G+5G Wi-Fi, BLE	PCB Antenna	W9
MAYA-W446-10B	Product with integrated antenna	NXP IW610C	2.4G Wi-Fi, BLE, 802.15.4	PCB Antenna	W9
MAYA-W436-10B	Product with integrated antenna	NXP IW610B	2.4G Wi-Fi, BLE	PCB Antenna	W9
MAYA-W473-10B	Product with one antenna pin	NXP IW610G	2.4G+5G Wi-Fi, BLE, 802.15.4	External Antenna	W1~8
MAYA-W463-10B	Product with one antenna pin	NXP IW610F	2.4G+5G Wi-Fi, BLE	External Antenna	W1~8
MAYA-W443-10B	Product with one antenna pin	NXP IW610C	2.4G Wi-Fi, BLE, 802.15.4	External Antenna	W1~8
MAYA-W433-10B	Product with one antenna pin	NXP IW610B	2.4G Wi-Fi, BLE	External Antenna	W1~8

From the above models, model: MAYA-W476-10B, MAYA-W473-10B was selected as representative model for the test and its data was recorded in this report.



1.1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FZ4O2915.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add model name, and Add LTE Coexistence filter on 2.4G path (MAYA-W476-10B, MAYA-W466-10B MAYA-W446-10B, MAYA-W436-10B, MAYA-W473-10B, MAYA-W463-10B, MAYA-W443-10B, MAYA-W433-10B)	After evaluation, no RF test validations are required.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 905462 D03 Client Without DFS New Rules v01r02

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
DFS	DFS03-HY	CHUN-YI WU	22.5~24.0°C / 54~61%	23/Dec/2024

2 Test Configuration of EUT

2.1 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std.	Test Channel Freq. (MHz)
802.11ax (HEW20)	5300 MHz

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Dynamic Frequency Selection (DFS)
Test Condition	Conducted measurement at transmit chains The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used.
Modulation Mode	802.11ax (HEW20)

2.3 Support Equipment

Support Equipment					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AP (Master)	ASUS	RT-AX88U	MSQ-RTAXHP00	-
2	Notebook	HP	EliteBook 820 G3	-	-
3	Notebook	DELL	Latitude E5550	-	-
4	Shielding Box	EMEC	EM-SHB-6505503 00-M	-	-
5	Monitor	BENQ	GL2230-B	-	-
6	Fixture	U-blox AG	MAYA-W4 EUK	-	Provided by Customer
7	EVKB Board	NXP	8MMINILPDDR4- EVKB	-	Provided by Customer
8	Power Supply	EDAC	EA1045CR	-	Provided by Customer
9	USB Type-C Cable	N/A	N/A	-	Provided by Customer
10	USB micro-B Cable	N/A	N/A	-	Provided by Customer
11	USB Type-C to A Adapter	N/A	N/A	-	Provided by Customer
12	Adapter PCB	N/A	N/A	-	Provided by Customer

3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values	
Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (Note 1).
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2).
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth (Note 3).

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Table D.2: Interference threshold values	
Maximum Transmit Power	Value (see note)
EIRP $\geq$ 200 mW	-64 dBm
EIRP < 200 mW and PSD < 10dBm/MHz	-62 dBm
EIRP < 200 mW and PSD $\geq$ 10dBm/MHz	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911.

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	Yes	Not required (See the note)	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Note :

According to KDB 905462 D03 Client Without DFS New Rules v01r02 (b) 6."An analyzer plot that contains a single 30-minute sweep on the original channel "

3.1.3 Applicability of DFS Requirements during Normal Operation

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

3.1.4 Channel Loading/Data Streaming

☐	The data file (MPEG-4) has been transmitting in a streaming mode.
☒	Software to ping the client is permitted to simulate data transfer with random ping intervals.
☒	Minimum channel loading of approximately 17%.
☐	Unicast protocol has been used.

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1A	1	15 unique PRI in KDB 905462 D02 Table 5a	$\text{Roundup}\left\{\left(\frac{1}{360}\right) \times \left(\frac{19 \times 10^6}{PRI}\right)\right\}$	60%	15
1B	1	15 unique PRI within 518-3066, Excluding 1A PRI		60%	15
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the short pulse radar types 1 through 4. If more than 30 waveforms are used for short pulse radar types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000

microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.

- ♦ The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had been ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

3.2.4 DFS Threshold Level


DFS Threshold Level	
DFS Threshold level: -64 dBm	☒ at the antenna connector
	☐ in front of the antenna
The Interference Radar Detection Threshold Level is $-64 \text{ dBm} + 0 [\text{dBi}] = -64 \text{ dBm}$. That had been taken into account the output power range and antenna gain.	

3.2.5 Calibration Setup

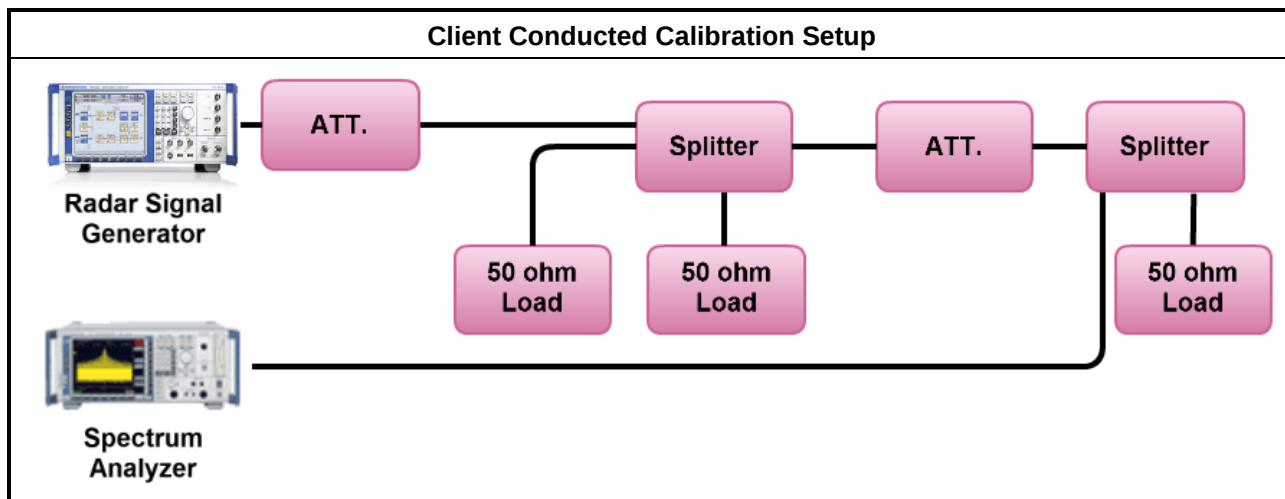




Radar #0 DFS detection threshold level

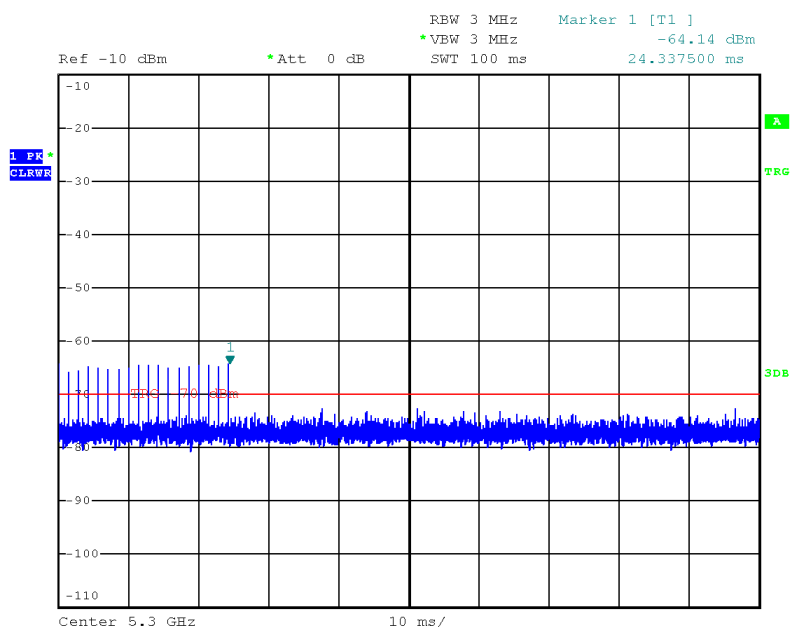


Date: 23.DEC.2024 16:20:47


3.2.7 Test Setup


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

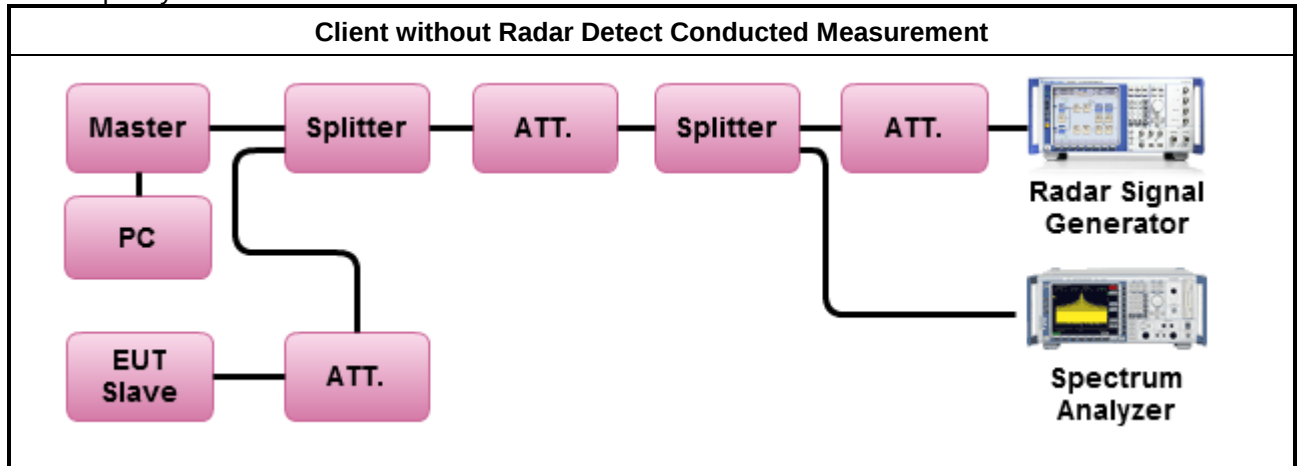

3.2.8 Data traffic Plot

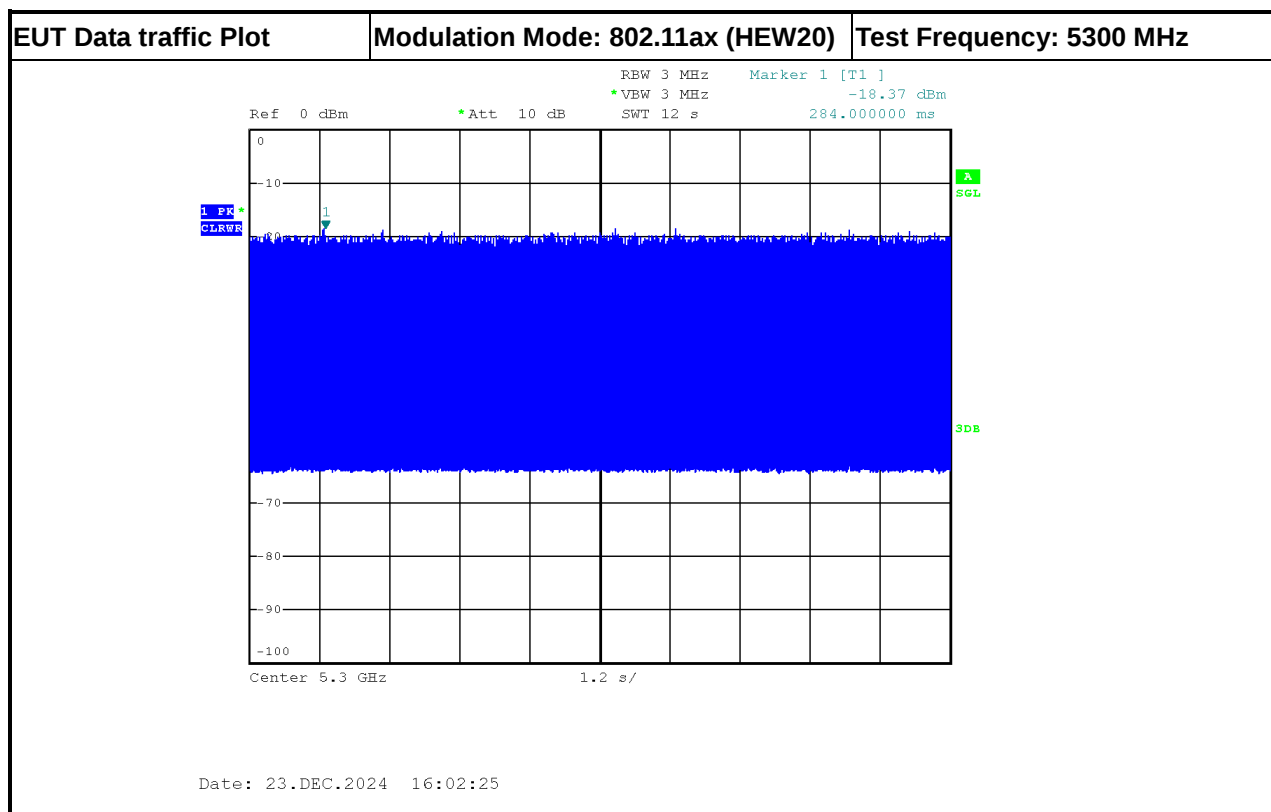

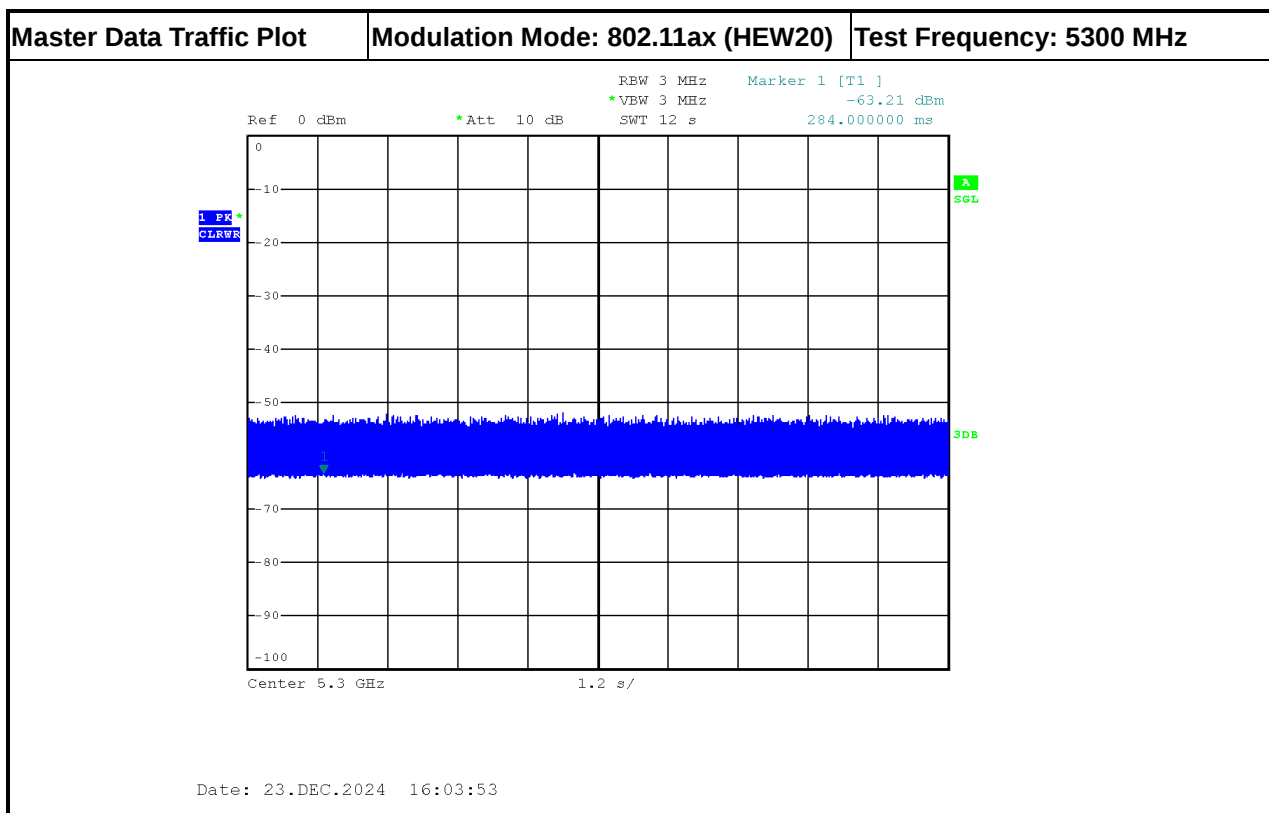

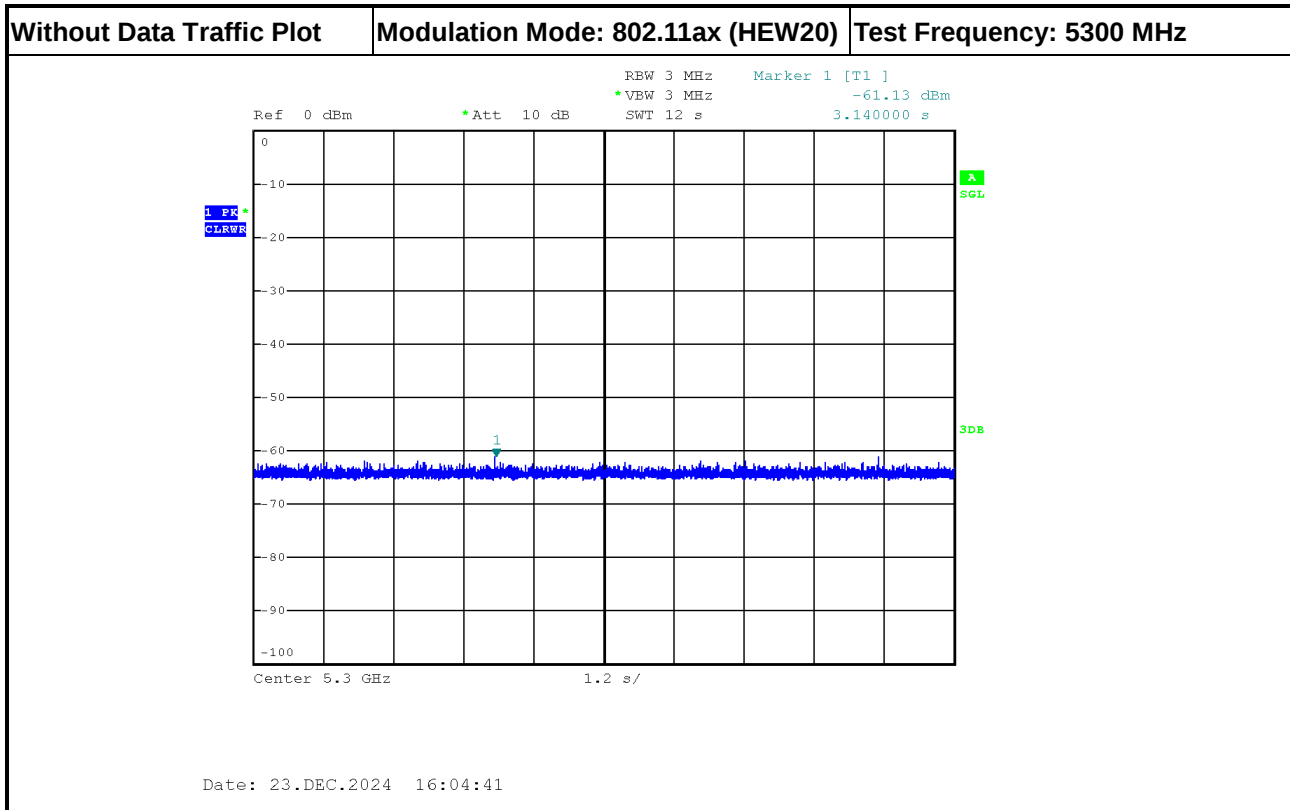

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.
Non-occupancy period	Minimum 30 minutes

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
☒	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0. And zoom-in a 60 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
☒	Verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.


3.3.4 Test Result of In-service Monitoring

Modulation Mode: 802.11ax (HEW20)


Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5300 MHz	-
Channel Move Time (sec.)	0.7715	< 10s
Channel Closing Transmission Time (ms) (Note)	12	< 60ms
Non-Occupancy Period (min.)	≥ 30	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.


3.3.5 Test Plot of In-Service Monitoring for Channel Move Time

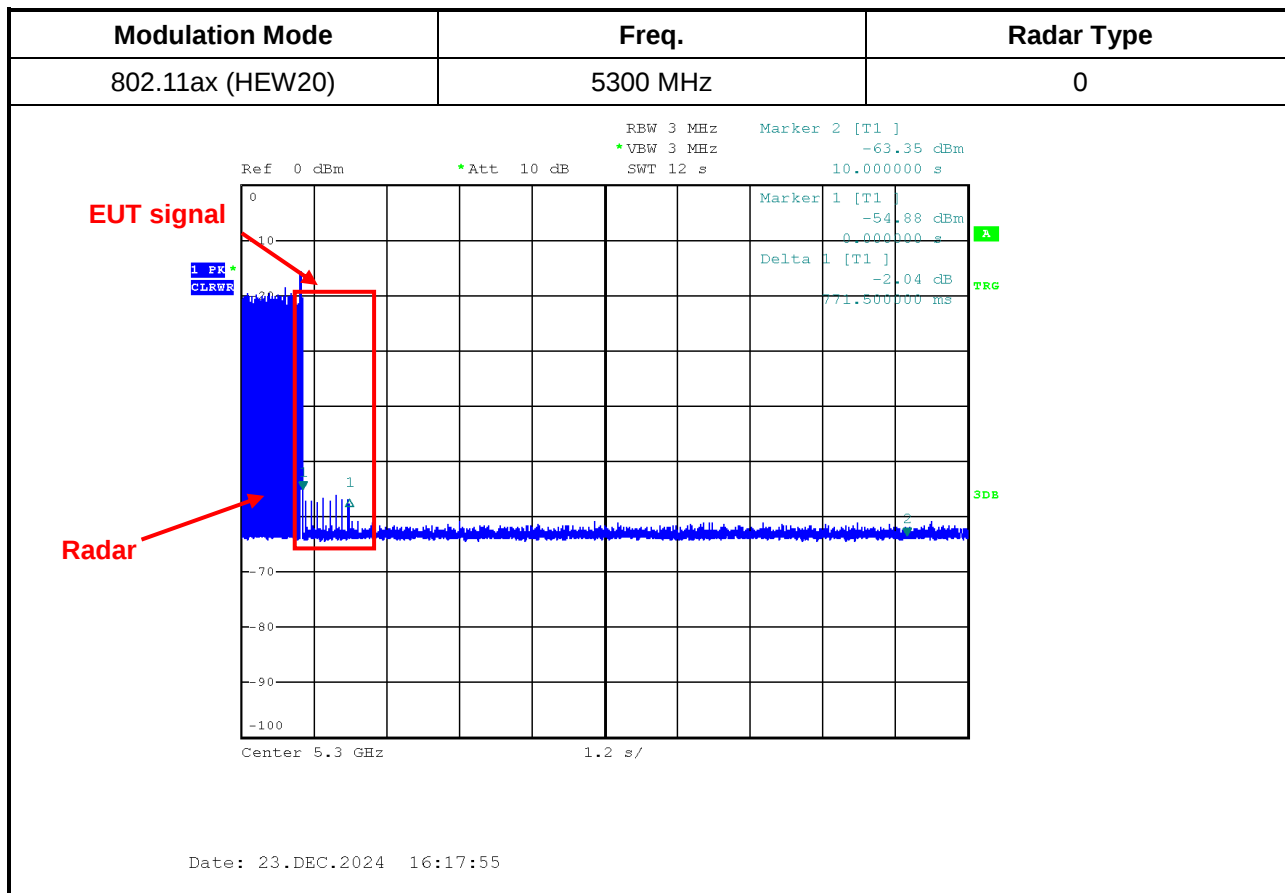

3.3.6 Test Plot of In-Service Monitoring for Channel Closing Transmission Time

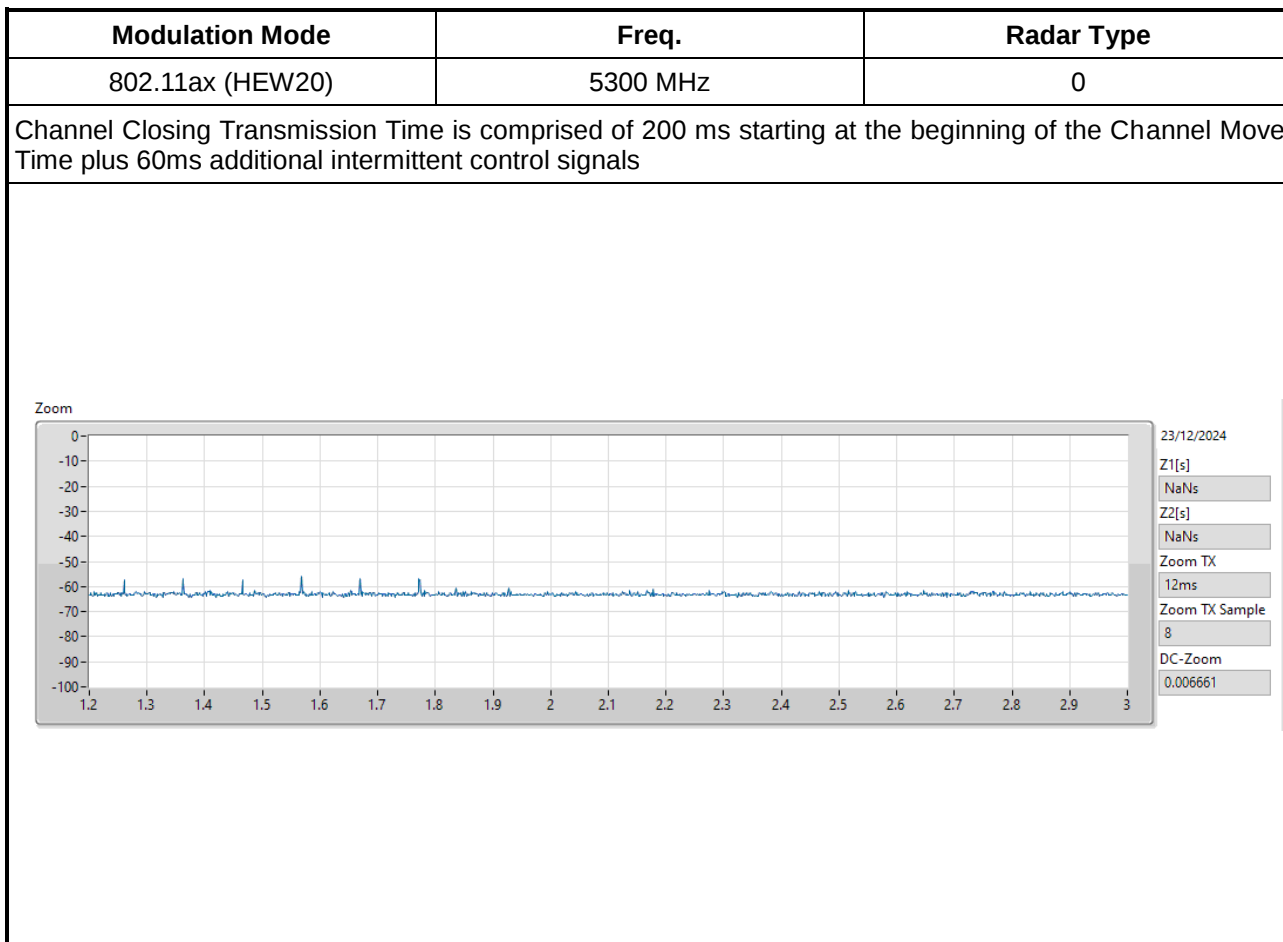

3.3.7 Test Plot of In-Service Monitoring for Non-Occupancy Period

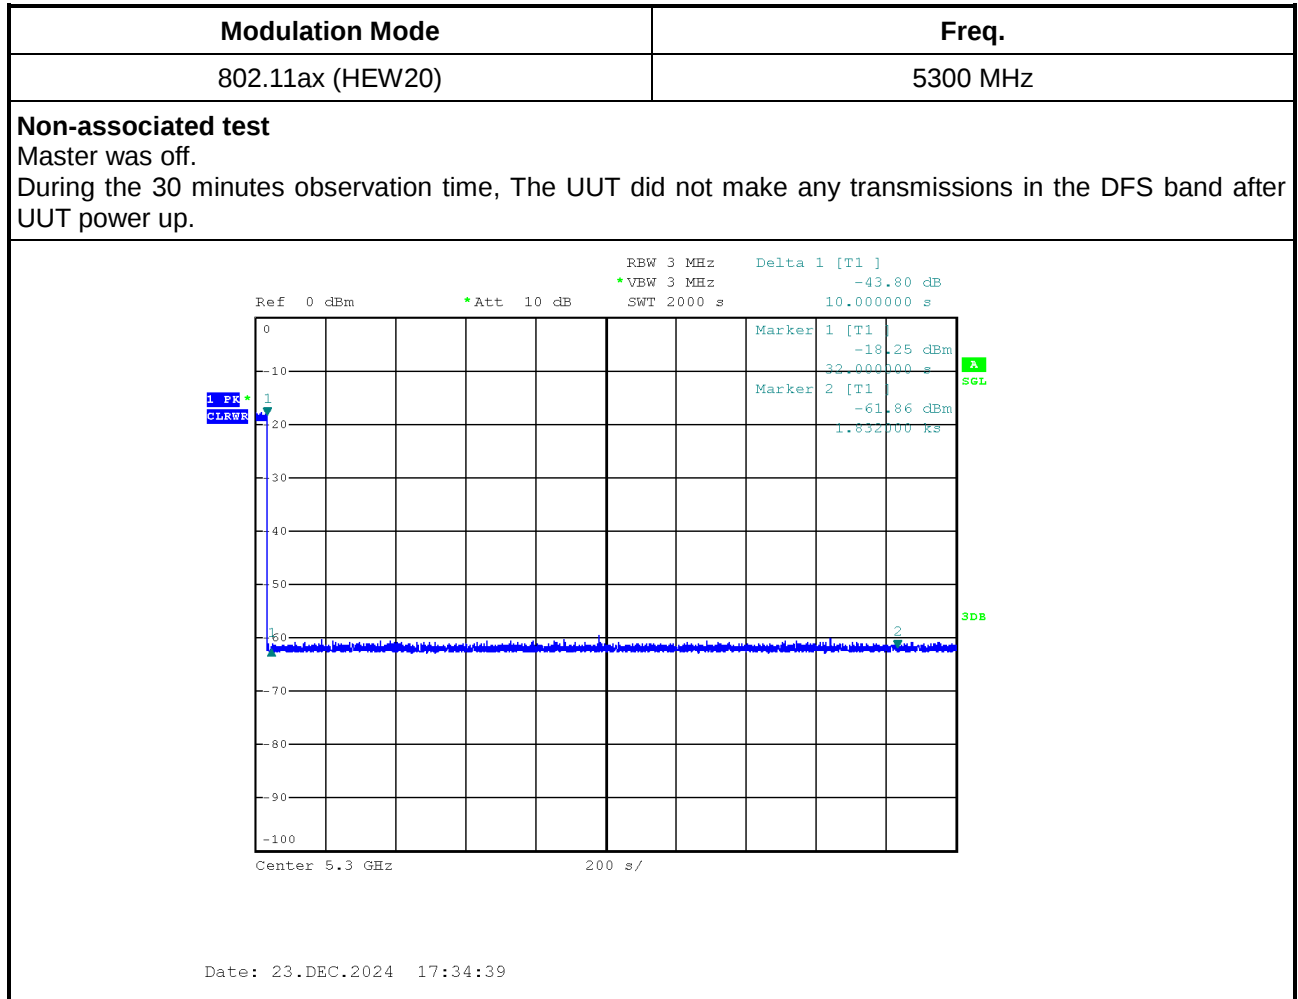

4 Test Equipment and Calibration Data

Instrument	Manufacturer/ Brand Name	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSP40	100305	9 kHz ~ 40 GHz	21/Mar/2024	20/Mar/2025
Vector Signal Generator	R&S	SMW200A	111529	100kHz~7.5GHz	12/Mar/2024	11/Mar/2025

5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Threshold Level	1.2 dB	Confidence levels of 95%
Statistical Performance Check	3.33 %	Confidence levels of 95%
CMT	36.52 ms	Confidence levels of 95%
CCTT	8 ms	Confidence levels of 95%
NOP	0 min	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%