

SAR TEST REPORT

For

Tablet PC

Model Number:

M10,M08,M09,M21,M30,M50,M51,M80,G10,G20,Z6,Z7,Z7P,Z8,Z10,Z13

FCC ID :2A7JV-M10

Report Number : WT268500632

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : No.4 Tongfa Road, Xili Town, Nanshan District, Shenzhen, Guangdong, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
Email : emcrf@smq.com.cn

The "important statement" on the back of report's homepage is an element of the report, and any copy that does not contain the "important statement" is incomplete.

重 要 声 明

Important statement

1. 本院是深圳市人民政府依法设立的不以营利为目的的法定机构，为政府、企业和社会提供计量、检验、检测、认证等技术服务。

SMQ is a statutory institution established by Shenzhen Municipal People's Government in accordance with the law, not for profit, providing technical services such as metrology, inspection, testing, and certification for the government, enterprises and society.

2. 本院保证检验的科学性、公正性和准确性，对检验的数据负责，并对委托单位所提供的样品和技术资料保密。

SMQ is committed to assuring the scientificness, impartiality and accuracy of all tests, responsibility for test data gained, and keeping confidential of all test samples and technical information provided by the entrusting party.

3. 抽样按照本院程序文件《抽样程序》和相应产品的检验细则的规定执行。

Sampling is carried out in accordance with the *Sampling Procedure* of SMQ procedure document and the corresponding product inspection specifications.

4. 送样委托检验结果仅对来样有效。委托检验的样品、样品及委托方信息均由委托方提供，本院不对样品的代表性、真实性及信息的完整性和准确性负责。

Commissioned testing results for submitted samples are only valid for the tested samples. The samples and their information, and information of the entrusting party are all provided by the entrusting party, and SMQ assumes no responsibility for representativeness and authenticity of the samples and completeness and accuracy of the information.

5. 除非特别说明，否则在报告中作出与标准或规范的符合性声明时，本院将不考虑不确定度的影响，根据测得值是否在规定限值范围内作出符合性判断。

Unless otherwise specified, when making statements of conformity to standards or specifications in the report, SMQ will disregard the uncertainty and judge conformity basing on whether the measured values are within the specified limits.

6. 检验报告二维码具浏览和下载完整报告功能，是应委托方要求所设，该二维码及其复制图能使任何人扫描获取完整的检验报告电子版，本报告持有人如需限制他人经该二维码获取检验报告内容，应自行遮盖或消除检验报告及其复制件所附二维码，我院对委托方选择检验报告二维码功能所致的信息泄露概不负责（适用于附二维码报告）。

The QR code in the report has the function of browsing and downloading the complete report, which is set according to the choice of the entrusting party. The QR code and its copy enable anyone who scan it to obtain the complete electronic version of the report. If the owner of this report needs to restrict others from obtaining the content of the report through the QR code, he should cover or remove the QR code attached to the report and its copies by himself. SMQ assumes no responsibility for the information leakage caused by the entrusting party's choice of the report QR code function (This clause applies to reports with QR code).

7. 报告无主检、审核、批准人签字，或涂改，或未盖本院报告专用章及骑缝章无效。未经本院许可，不得部分复印、摘用或篡改本报告内容。复印报告未重新加盖本院报告专用章无效。

Reports without the signature of itester, reviewer or authorized approver, or with alterations without authorization, or without the dedicated report seal or across-page seal are invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of SMQ. Copies being not re-stamped with the dedicated report seal are invalid.

8. 无 CMA 标志的报告，仅作为科研、教学或内部质量控制之用。

Reports without the CMA mark are intended solely for research, teaching or internal quality control.

9. 只申领电子报告时，相关内容和效力以电子报告为准；电子报告和纸质报告同时申领时，电子报告仅作为纸质报告的副本，相关内容和效力以同编号纸质报告为准。

When electronic report is only applied for, the content and validity shall be based on the electronic report. When both electronic and paper reports are simultaneously applied for, the electronic report shall serve solely as copy of the paper report, and the content and validity shall be based on the paper report with the same number.

10. 委托方对报告有异议的，应于报告发出之日起十五日内向本院提出。政府行政管理部门下达的监督检验任务，受检方对报告有异议的，应按政府行政管理部门文件规定及国家相关法律、法规执行。

Any objection to the report issued by SMQ should be submitted to SMQ within 15 days from the issuing date of the report. For Government-Mandated Inspection, if the inspected party has objections to the report, they shall follow the relevant documents of the government administrative departments and applicable national laws or regulations.

11. 报告更改后，发出的电子版报告、报告的扫描件及传真件将不被追回，委托方有义务将更改后的报告提供给使用原报告的相关方。

When the report is revised, SMQ is not responsible for recalling the issued electronic version, scanned copies, and faxed copies of the report. The entrusting party has the obligation to provide the revised report to the relevant parties using the original report.

12. 委托方不得擅自使用检验结果进行不当宣传。如果委托方滥用或者违法使用报告，导致侵犯第三方权益或造成第三方损失的，本院不承担任何责任。如果因委托方不合理使用报告，导致本院遭受损失的，委托方应当赔偿本院所遭受的所有损失，包括但不限于赔偿款、诉讼费、律师费、交通费、公证费等。

The entrusting party should not use the testing results for improper publicity. In the event that the entrusting party abuses or illegally uses the report, thereby resulting in infringement of rights and interests of a third-party or causing losses to a third party, SMQ shall not assume any responsibility. In the event that the unreasonable use of the report by the entrusting party causes losses to SMQ, the entrusting party shall compensate SMQ for all losses incurred, including but not limited to compensation fees, litigation costs, attorney fees, transportation expenses, and notarization fees.

投诉和报告真伪查询电话及邮箱：400-900-8999, complaint@smq.com.cn

Complaint and Report Authenticity Inquiry Phone Number and Email: 400-900-8999, complaint@smq.com.cn

Test report declaration

Applicant : Shenzhen Jiutong Zhichuang Technology Co., Ltd.
Room 615, Building B, Xinshiyi Maker Park, No.111 Pingshan 1st
Address : Road, Taoyuan Subdistrict, Nanshan District, Shenzhen, Guangdong
Province, China
Manufacturer : TPV Audio and Visual Technology (Shenzhen) Co., Ltd.
42F, Building T1/2A, Shenzhen Bay Innovation and Technology
Address : Center, Keyuan Avenue, Yuehai Sub-district, Nanshan
District, Shenzhen, Guangdong Province, P.R. China
EUT Description : Tablet PC
Model No : M10, M08, M09, M21, M30, M50, M51, M80, G10, G20, Z6, Z7, Z7P, Z8, Z10,
Z13
Trade mark : /

Test Standards:

FCC 47CFR Part 2(2.1093) IEC/IEEE 62209-1528 KDB 447498 D04v01 KDB 248227 D01v02r02 KDB 865664 D01v01r04 KDB 865664 D02v01r02 KDB 941225 D06v02r01

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the compliance of the applicable standards stated above. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The results documented in this report only apply to the tested sample, under the conditions and modes of operation as described herein.

The test report shall not be reproduced in part without written approval of the laboratory.



Project Engineer:	 (Zhou Li 周立)	Date:	Apr. 21, 2026
Checked by:	 (Wan Xiaojing 万晓婧)	Date:	Apr. 21, 2026
Approved by:	 (Lin Bin 林斌)	Date:	Apr. 21, 2026

TABLE OF CONTENTS

1. REPORTED SAR SUMMARY	4
1.1. Statement of Compliance	4
1.2. RF exposure limits (ICNIRP Guidelines)	5
1.3. Ratings and System Details	6
1.4. Test specification(s)	7
1.5. List of Test and Measurement Instruments	8
2. GENERAL INFORMATION	9
2.1. Report information	9
2.2. Laboratory Accreditation and Relationship to Customer	9
3. SAR MEASUREMENT SYSTEM CONFIGURATION	10
3.1. SAR Measurement Set-up	10
3.2. Probe description	11
3.3. Phantom description	11
3.4. Device holder description	12
4. SAR MEASUREMENT PROCEDURE	12
4.1. Scanning procedure	12
7. SYSTEM VERIFICATION PROCEDURE	17
7.1. Tissue Verification	17
8. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	20
8.1. SAR measurement variability	20
9. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	21
9.1. SAR measurement variability	21
9.2. SAR measurement uncertainty	21
10. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	22
10.1. SAR measurement variability	22
10.2. SAR measurement uncertainty	22
11. Test Configuration	22
12. AR TEST RESULTS	23
12.1. EUT Antenna Locations	23
13. MEASUREMENT RESULTS	24
13.1. SAR measurement Results	24
13.2. WIFI 2.4G SAR results	25
13.3. WIFI 5.2G SAR results	26
13.4. WIFI 5.3G SAR results	27
13.5. WIFI 5.6G SAR results	28
13.6. BT SAR results	29
13.7. Repeated SAR results	30
14. EXPOSURE POSITIONS CONSIDERATION	31
14.1. Multiple Transmitter Evaluation	31

1. REPORTED SAR SUMMARY

1.1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

Band	Highest SAR Summary
	Body SAR (Gap 0mm) 1g SAR (W/kg)
Wifi2.4GHz	0.231
Wifi 5GHz	1.322
Bluetooth	0.186

1.2. RF exposure limits (ICNIRP Guidelines)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR*(Brain/Body)	1.60mW/Kg	8.00mW/Kg
Spatial Average SAR** (Whole Body)	0.08mW/Kg	0.40mW/Kg
Spatial Peak SAR*** (Limbs)	4.00mW/Kg	20.00mW/Kg

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



1.3. Ratings and System Details

Product Name:	Tablet PC
Model No.(EUT):	M10,M08,M09,M21,M30,M50,M51,M80,G10,G20,Z6,Z7,Z7P,Z8,Z10,Z13
EUT Supports Radios application:	WL AN 2.4GHz Band: 2412 MHz ~ 2462 MHz WL AN 5.2GHz Band: 5180 MHz ~ 5240 MHz WL AN 5.3GHz Band: 5260 MHz ~ 5320 MHz WL AN 5.5GHz Band: 5500 MHz ~ 5700 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Battery Specification	Model: 30105128P Voltage: 3.8V 6000mAh
Hardware Version:	BND-N868-V1.1
Software version:	AOC_M10_2552_V06
Remark	The products are the same, but the models are different, and they are sold in different regions.

1.4. Test specification(s)

FCC 47CFR Part 2(2.1093)	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEC/IEEE 62209-1528	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D04v01	General RF Exposure Guidance No deviation
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz
KDB 865664 D02v01r02	RF Exposure Reporting
KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities
Note 1: The test item is not applicable. Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.	

1.5. List of Test and Measurement Instruments

	Equipment	Model No.	Serial No.	Manufacturer	Last Calibration Date	Period
☒	SAR test system	TX60L	F08/5AY8A1/A/01+F08/	SPEAG	NCR	NCR
☒	Electronic Data Transmitter	DAE4	1637	SPEAG	2025.10.21	1year
☒	SAR Probe	EX3DV4	7623	SPEAG	2025.04.24	1year
☒	Software	85070	--	Agilent	--	--
☒	Software	DASY5	--	SPEAG	--	--
☒	System Validation Dipole,2450MHz	D2450V2	818	SPEAG	2024.09.05	3year
☒	System Validation Dipole,5GHz	D5GzV2	1185	SPEAG	2025.11.26	3year
☒	Dielectric Probe Kit	85070E	MY44300455	Agilent	NCR	NCR
☒	Dual-directional coupler,0.10-2.0GHz	778D	MY48220198	Agilent	NCR	NCR
☒	Dual-directional coupler,2.00-18GHz	772D	MY46151160	Agilent	NCR	NCR
☒	Power Amplifier	ZVE-8G	SC280800926	MINI-CIRCUITS	NCR	NCR
☒	Power Amplifier	ZHL42W	81709	MINI-CIRCUITS	NCR	NCR
☒	Signal Generator	SMR20	MY51111531	R&S	2025.04.20	1year
☒	Power Sensor	NRP-Z21	102626	R&S	2025.04.20	1year
☒	Power Sensor	NRP-Z21	105057-XP	R&S	2025.04.20	1year
☒	Network Analyzer	E5071C	MY46109550	Agilent	2025.04.20	1Year
☒	Flat Phantom	ELI4.0	TP-1904	SPEAG	NCR	NCR
☒	Twin Phantom	SAM	TP-1504	SPEAG	NCR	NCR
☒	Wideband Radio	CMW500	170456	R&S	2026.04.09	1Year

	Communication Tester					
☒	Precision Thermometer	--	--	--	2026.03.31	1Year

Table 3: List of Test and Measurement Equipment

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.



2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacture r.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in the ir facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, C hina. At the time of testing, Laboratory is accredited by the following organizations: China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579. The Laboratory is Accredited Testing Laboratory of FCC with Designation number

CN1165 and Site registration number 582918. The Laboratory is registered to perform emission tests with Innovation, Science and

Economic Development (ISED), and the registration number is 11177A. The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078, and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

Picture 1 of the photo documentation shows a complete view of the test environment.

3.2. Probe description


Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20mm) Tip length: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

3.3. Phantom description

The used SAM Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm $\pm$ 0.1 mm.

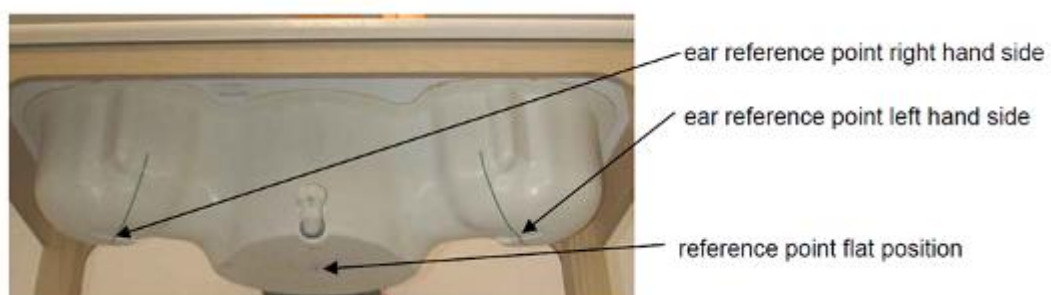



ELI4 Phantom

Shell Thickness	2mm+/- 0.2mm
Filling Volume	Approximately 30 liters
Measurement Areas	Flat phantom
The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.	

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity ≤ 5 and a loss tangent ≤ 0.05 .

3.4. Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.



4. SAR MEASUREMENT PROCEDURE

4.1. Scanning procedure

- The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully

defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The reference and drift measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.

- The surface check measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- The area scan measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y-dimension ($\leq 2\text{GHz}$), 12 mm in x- and y-dimension (2-4 GHz) and 10mm in x- and y-dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

Results of this coarse scan are shown in Appendix B.

- A "zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous "coarse" scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8\text{ mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz - $\leq 4\text{ mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz - $\leq 4\text{ mm}$ and 4-6GHz - $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. Test results relevant for the specified standard (see chapter 1.5.) are shown in table form in chapter 3.2.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can – depending in the field strength- also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan spatial resolution ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)$	$\Delta z_{\text{zoom}}(n>1)$	

≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5*Δzzoom(n-1)	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5*Δzzoom(n-1)	≥30mm
3-4GHz	≤10mm	≤5mm	≤4mm	≤3mm	≤1.5*Δzzoom(n-1)	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5*Δzzoom(n-1)	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5*Δzzoom(n-1)	≥22mm

Spatial Peak SAR Evaluation

- The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The bases of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution).
- The algorithm that finds the maximal averaged volume is separated into three different stages.
- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.
- Extrapolation
- The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

- The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].
- Volume Averaging
- At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.
- Advanced Extrapolation
- DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

6.1.1. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and

modulation data) in measurement files with the extension DAE4. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	σ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_{i2} \cdot cf/dcpi$$

with V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / \text{Normi} \cdot \text{ConvF})^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)

Normi = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

7. SYSTEM VERIFICATION PROCEDURE

7.1. Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials

Ingredient (% by weight)	Head Tissue				
	750	835	1750	1900	2450
Water	34.4	41.45	52.64	55.24	62.7
Salt(NaCl)	0.79	1.45	0.36	0.306	0.5
Sugar	64.81	56.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.54	36.8

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredient	(% by weight)
Water	64-78%
Mineral oil	11-18%
Emulsifiers	9-15%
Additives and Salt	2-3%

Table 4 : Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue-equivalent liquid measurements:


f/MHz	Date Tested	Dielectric Parameters	Target	Tolerance (%)	Temp (°C)
2450	2026.04.16	$\epsilon_r = 39.10$	39.2 (37.24~41.16)	±5	20
		$\sigma = 1.82$	1.80 (1.71~1.89)		
5250	2026.04.17	$\epsilon_r = 36.35$	36.0 (34.20~37.80)	±5	20
		$\sigma = 4.79$	4.66 (4.43~4.89)		
5600	2026.04.17	$\epsilon_r = 35.06$	35.5 (33.82~37.38)	±5	20
		$\sigma = 5.19$	5.07 (4.71~5.21)		

System check, Tissue-equivalent liquid:

f/MHz	Date Tested	Power (mW)	Measured SAR		Measured SAR (Normalized to 1W)		Target 1g	Target 10g	Tolerance (%)	Temp (°C)
			SAR(W/kg), 1g	SAR(W/kg), 10g	SAR(W/kg), 1g	SAR(W/kg), 10g				
2450	2026.04.16	250	12.7	5.85	51.00	23.40	52.20 (46.98~57.42)	23.80 (21.42~26.18)	±10	20
5250	2026.04.17	100	7.49	2.13	74.90	21.30	76.50 (68.85~84.15)	21.80 (19.62~23.98)	±10	20
5600	2026.04.17	100	8.06	2.26	80.60	22.60	80.20 (72.18~88.22)	22.80 (20.52~25.08)	±10	20

System Checking

The manufacturer calibrates the probes annually. A system check measurement was made following the determination of the dielectric parameters of the tissue-equivalent liquid, using the dipole validation kit. A power level of 250mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom.

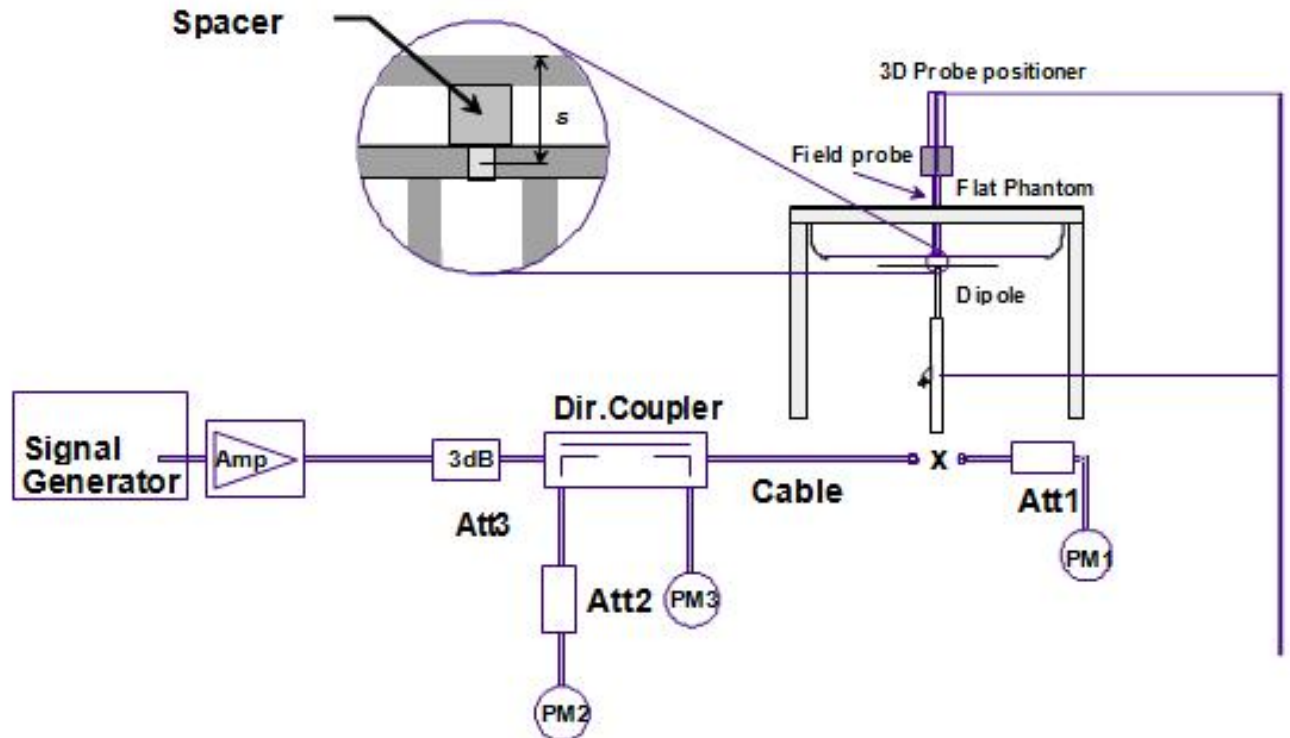

The system checking results (dielectric parameters and SAR values) are given in the table below.

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).

8. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

8.1. SAR measurement variability

Refer to section 6.2 of KDB 447498 D01:

Transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR and the wrist-worn condition requires 10-g extremity SAR. The 10-g extremity and 1-g SAR test exclusions may be applied to the wrist and face exposure conditions. When SAR evaluation is required, next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The wrist bands should be strapped together to represent normal use conditions. SAR for wrist exposure is evaluated with the back of the device positioned in direct contact against a flat phantom filled with body tissue-equivalent medium. The wrist bands should be unstrapped and touching the phantom. The space introduced by the watch or wrist bands and the phantom must be representative of actual use conditions; otherwise, if applicable, the neck or a curved head region of the SAM phantom may be used, provided the device positioning and SAR probe access issues have been addressed through a KDB inquiry. When other device positioning and SAR measurement considerations are necessary, a KDB inquiry is also required for the test results to be acceptable; for example, devices with rigid wrist bands or electronic circuitry and/or antenna(s) incorporated in the wrist bands. These test configurations are applicable only to devices that are worn on the wrist and cannot support other use conditions; therefore, the operation

Per KDB865664 D01 SAR measurement 100MHz to 6GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurement requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg; step 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is >1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

9. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

9.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100MHz to 6GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurement requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 5) Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg; step2) through 4) do not apply.
- 6) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
- 7) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 8) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is >1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

9.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100MHz to 6GHz v01r03, when the highest measured 1-g SAR within a frequency band is <1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio(1.5/1.6) is applied to extremity and occupational exposure conditions.

10. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

10.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100MHz to 6GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurement requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 9) Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg; step 2) through 4) do not apply.
- 10) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
- 11) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 12) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is >1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

10.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100MHz to 6GHz v01r03, when the highest measured 1-g SAR within a frequency band is <1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

11. Test Configuration


WiFi Test Configurations

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set according to tune up procedure for 802.11 b mode by software. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode.

12. AR TEST RESULTS

12.1. EUT Antenna Locations

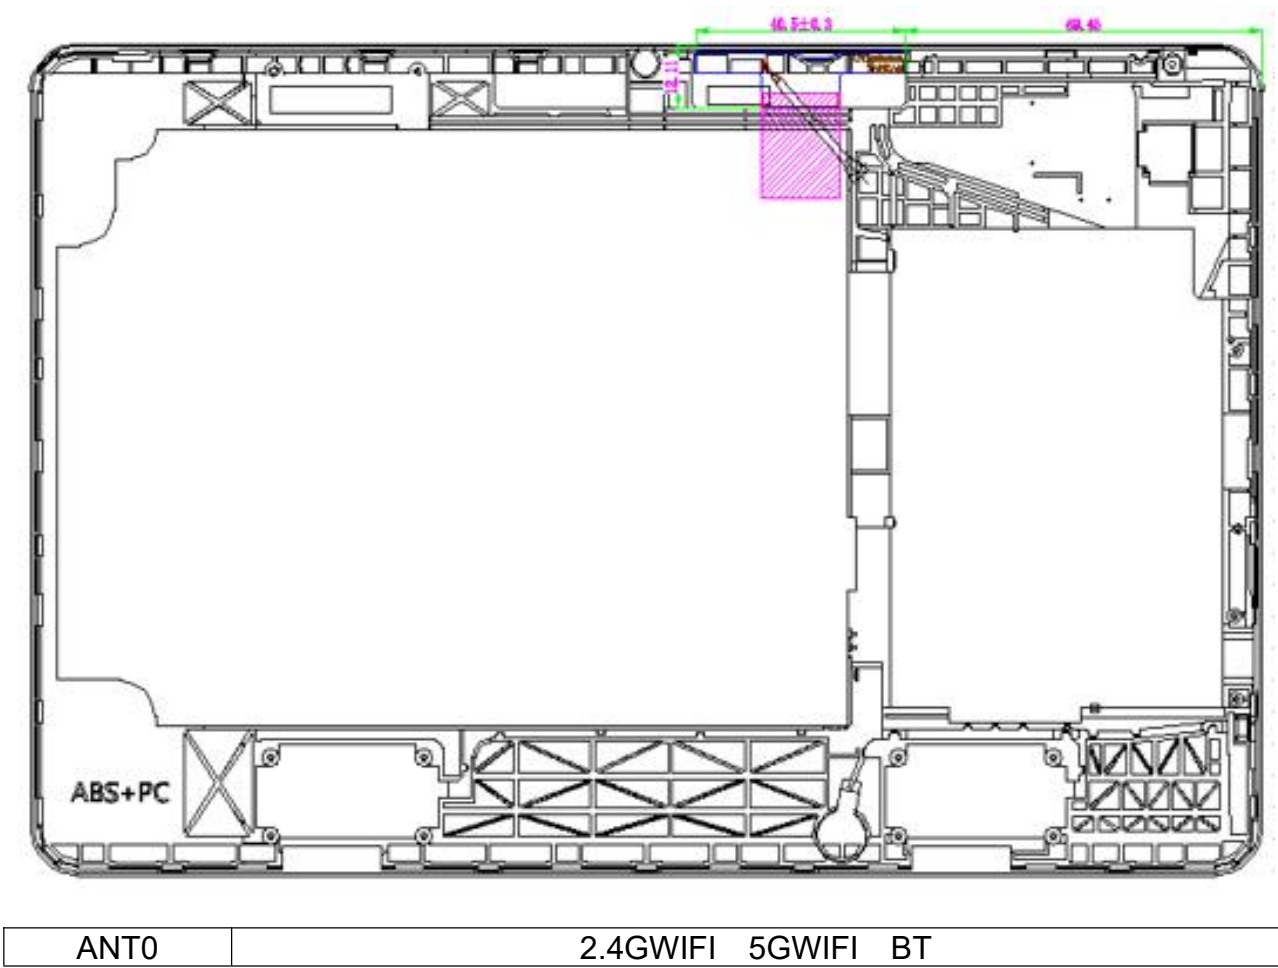

13. MEASUREMENT RESULTS

Result: Passed

Date of testing	:	2026.04.16~2026.04.17
Ambient temperature	:	20°C~22°C
Relative humidity	:	50~68%

13.1. SAR measurement Results

General Notes:

- 1) Per KDB447498 D01v06, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> 1/2$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measure SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB 941225 D06 Hotspot Mode SAR v02:r01, the DUT dimension is bigger than 9cm*5cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r03, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan plots-processing (refer to appendix B for details).

WLAN Notes

Per KDB 248227 D01v02r02, for all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Per KDB 248227 D01v02r02, for 802.11g/n SAR testing is required. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is > 1.2 W/kg.

Per KDB 248227 D01v02r02, for OFDM transmission configurations in the 2.4 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n mode is used for SAR measurement, on the highest measured output power channel for each frequency band.

13.2. WIFI 2.4G SAR results

Config	Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
Ant0	802.11n(HT40)	original Power	Front	0	3	2422	14.04	15.0	1.247	0.185	0.231
	802.11n(HT40)	original Power	Back	0	3	2422	14.04	15.0	1.247	0.161	0.201
	802.11n(HT40)	original Power	Left	0	3	2422	14.04	15.0	1.247	0.019	0.024
	802.11n(HT40)	original Power	Right	0	3	2422	14.04	15.0	1.247	0.137	0.171
	802.11n(HT40)	original Power	Top	0	3	2422	14.04	15.0	1.247	0.052	0.065
	802.11n(HT40)	original Power	Bottom	0	3	2422	14.04	15.0	1.247	0.023	0.029
Ant0	802.11b	original Power	Front	0	6	2437	12.85	14.0	1.303	0.175	0.228
	802.11b	original Power	Back	0	6	2437	12.85	14.0	1.303	0.155	0.202
	802.11b	original Power	Left	0	6	2437	12.85	14.0	1.303	0.015	0.020
	802.11b	original Power	Right	0	6	2437	12.85	14.0	1.303	0.130	0.169
	802.11b	original Power	Top	0	6	2437	12.85	14.0	1.303	0.049	0.064
	802.11b	original Power	Bottom	0	6	2437	12.85	14.0	1.303	0.019	0.025

13.3. WIFI 5.2G SAR results

Config	Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
Ant0	802.11a	original Power	Front	0	36	5180	8.73	9.0	1.064	0.393	0.418
	802.11a	original Power	Back	0	36	5180	8.73	9.0	1.064	0.951	1.012
	802.11a	original Power	Left	0	36	5180	8.73	9.0	1.064	0.05	0.053
	802.11a	original Power	Right	0	36	5180	8.73	9.0	1.064	0.392	0.417
	802.11a	original Power	Top	0	36	5180	8.73	9.0	1.064	0.057	0.061
	802.11a	original Power	Bottom	0	36	5180	8.73	9.0	1.064	0.063	0.067
	802.11a	original Power	Back	0	40	5200	7.96	8.0	1.009	0.913	0.921
	802.11a	original Power	Back	0	48	5240	8.47	9.0	1.130	0.82	0.926

13.4. WIFI 5.3G SAR results

Config	Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
Ant0	802.11n20	original Power	Front	0	52	5260	8.15	9.0	1.216	0.652	0.793
	802.11n20	original Power	Back	0	52	5260	8.15	9.0	1.216	1.01	1.228
	802.11n20	original Power	Left	0	52	5260	8.15	9.0	1.216	0.325	0.395
	802.11n20	original Power	Right	0	52	5260	8.15	9.0	1.216	0.493	0.600
	802.11n20	original Power	Top	0	52	5260	8.15	9.0	1.216	0.621	0.755
	802.11n20	original Power	Bottom	0	52	5260	8.15	9.0	1.216	0.086	0.105
	802.11n20	original Power	Back	0	60	5300	8.0	9.0	1.259	1.05	1.322
	802.11n20	original Power	Back	0	64	5320	6.71	7.5	1.199	1.02	1.223

13.5. WIFI 5.6G SAR results

Config	Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
Ant0	802.11ac20	original Power	Front	0	100	5500	7.46	8.5	1.271	0.32	0.407
	802.11ac20	original Power	Back	0	100	5500	7.46	8.5	1.271	0.578	0.734
	802.11ac20	original Power	Left	0	100	5500	7.46	8.5	1.271	0.076	0.097
	802.11ac20	original Power	Right	0	100	5500	7.46	8.5	1.271	0.085	0.108
	802.11ac20	original Power	Top	0	100	5500	7.46	8.5	1.271	0.032	0.041
	802.11ac20	original Power	Bottom	0	100	5500	7.46	8.5	1.271	0.046	0.058
	802.11ac20	original Power	Back	0	120	5600	7.21	8.0	1.199	0.616	0.739
	802.11ac20	original Power	Back	0	140	5700	5.18	6.0	1.208	0.601	0.726

13.6. BT SAR results

Config	Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
Ant0	BT	original Power	Front	0	39	2441	3.56	4.5	1.242	0.150	0.186
	BT	original Power	Back	0	39	2441	3.56	4.5	1.242	0.092	0.114
	BT	original Power	Left	0	39	2441	3.56	4.5	1.242	0.010	0.012
	BT	original Power	Right	0	39	2441	3.56	4.5	1.242	0.081	0.101
	BT	original Power	Top	0	39	2441	3.56	4.5	1.242	0.025	0.031
	BT	original Power	Bottom	0	39	2441	3.56	4.5	1.242	0.013	0.016

Note: The BLE device's maximum output power must be less than 3 milliwatts (3 mW) or 4.77 dBm as measured at the antenna port.

Plots of the Measurement scans are given in Appendix B.

13.7. Repeated SAR results


Remark:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Mode	Power Level	Position	Dist. (mm)	Ch.	Freq. (MHz)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Meas SAR (W/kg)	1g Scaled SAR (W/kg)
802.11a	original Power	Back	0	36	5180	8.73	9.0	1.064	0.949	1.010
802.11a	original Power	Back	0	40	5200	7.96	8.0	1.009	0.910	0.918
802.11a	original Power	Back	0	48	5240	8.47	9.0	1.130	0.805	0.909
802.11n20	original Power	Back	0	52	5260	8.15	9.0	1.216	0.998	1.214
802.11n20	original Power	Back	0	60	5300	8.0	9.0	1.259	1.01	1.272
802.11n20	original Power	Back	0	64	5320	6.71	7.5	1.199	0.995	1.194

14. EXPOSURE POSITIONS CONSIDERATION

14.1. Multiple Transmitter Evaluation

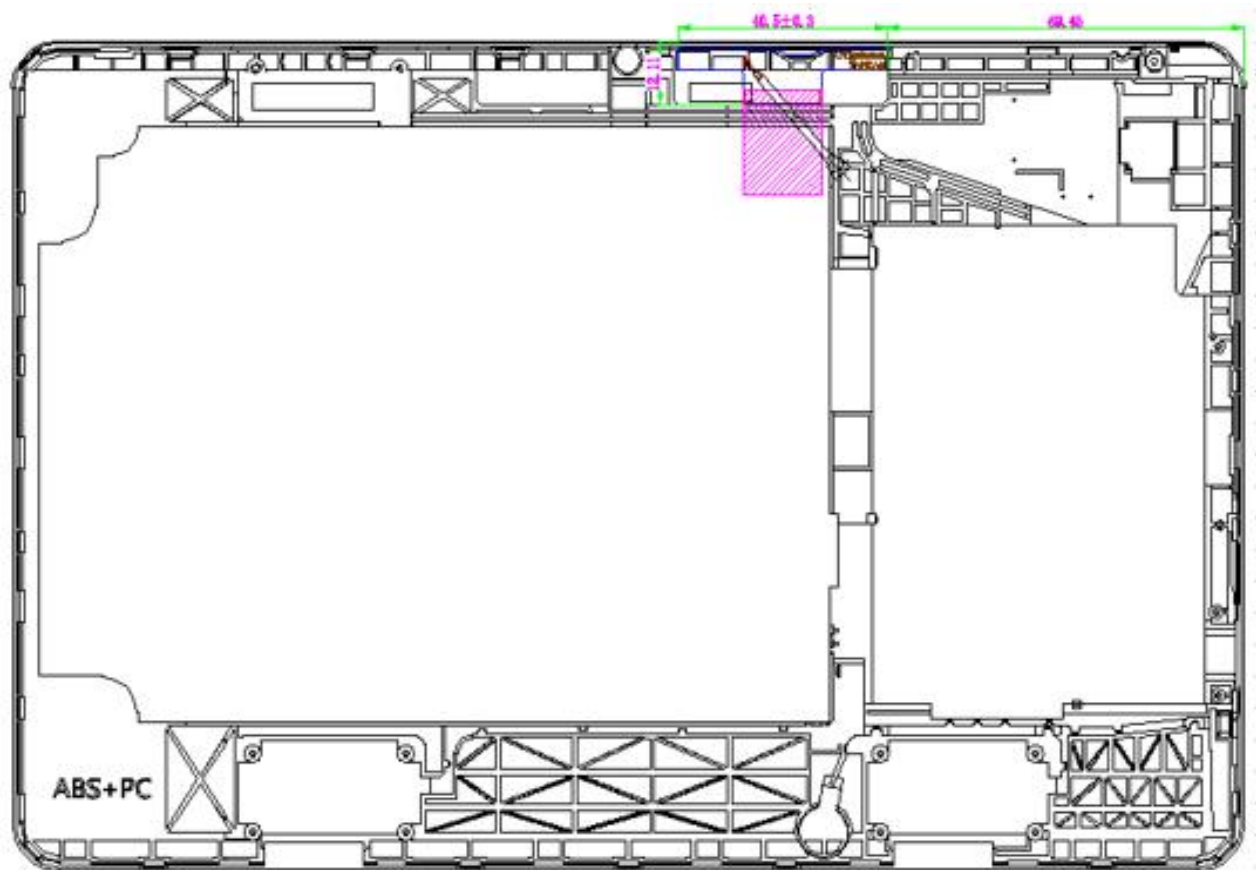

Antennas	Distance of the Antenna to the EUT surface edge					
	Front	Back	Left	Right	Top	Bottom
ANT0	≤25mm	≤25mm	>25mm	>25mm	≤25mm	>25mm

Appendix A. System Check Plots

Appendix B. MEASUREMENT SCANS

AppendixC RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Appendix D. RELEVANT PAGES FROM DAE&DIPOLE VALIDATION KIT REPORT(S)

Appendix E. Photographs of the Test Set-Up

APPENDIX F: Conducted RF Output Power Table and Tune-up