

RF Test Report

(ZigBee)

Report No.: JYTSZ-R12-2600295

Applicant: Nextivity Incorporated

Address of Applicant: 16550 West Bernardo Drive, Bldg 5, Suite 550 San Diego, CA 92127, USA

Equipment Under Test (EUT)

Product Name: SMART SERVER ANTENNA MODULE

Model No.: J3-1414-30-0A1C

Trade Mark: 

FCC ID: YETJ3-0A1C


Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 10 Oct., 2025

Date of Test: 11 Oct., 2025 to 15 May, 2026

Date of Report Issued: 26 Jun, 2026

Test Result: PASS

Project by:	 Liyun Ding Project Engineer	Date:	26 Jun, 2026
Reviewed by:	Wetanzhang Senior Engineer	Date:	26 Jun, 2026
Approved by:	Janet. Wei Manager	Date:	26 Jun, 2026

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	15 May, 2026	Original
01	26 Jun, 2026	1. Updated date on page 1. 2. Updated Antenna information on page 14. 3. Removed test equipment WXJ081-1 on page 8. 4. Updated laboratory facility on page 6. 5. Updated data on page 21~Page 26.

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Disclaimer.....	4
3.4 Test Mode and Test Environment.....	5
3.5 Description of Test Auxiliary Equipment	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method.....	5
3.8 Laboratory Facility	6
3.9 Laboratory Location.....	6
3.10 Test Instruments List	7
4 Measurement Setup and Procedure	9
4.1 Test Channel	9
4.2 Test Setup	9
4.3 Test Procedure	11
5 Test Results.....	12
5.1 Summary	12
5.1.1 Clause and Data Summary.....	12
5.1.2 Test Limit.....	13
5.2 Antenna requirement.....	14
5.3 Emissions in Restricted Frequency Bands.....	15
5.4 Emissions in Non-restricted Frequency Bands	19

3 General Information

3.1 Client Information

Applicant:	Nextivity Incorporated
Address:	16550 West Bernardo Drive, Bldg 5, Suite 550 San Diego, CA 92127, USA
Manufacturer:	Nextivity Incorporated
Address:	16550 West Bernardo Drive, Bldg 5, Suite 550 San Diego, CA 92127, USA
Factory:	Nextivity Incorporated
Address:	16550 West Bernardo Drive, Bldg 5, Suite 550 San Diego, CA 92127, USA

3.2 General Description of E.U.T.

Product Name:	SMART SERVER ANTENNA MODULE
Model No.:	J3-1414-30-0A1C
Operation Frequency:	2405 MHz - 2480 MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Technology:	OQPSK
Antenna Type:	External Antenna
Antenna Gain:	14 dBi (declare by applicant)
Antenna transmit mode:	SISO (1TX, 1RX)
Power Supply:	DC 5V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Disclaimer

Disclaimer:
For the information or data provided by the client in this report, the relevant results or conclusions of this report are only made for these data or information. The testing laboratory is not responsible for the authenticity and accuracy of these data or information.

3.4 Test Mode and Test Environment

Test Mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Remark:	
- For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan all data speed, found 1 Mbps (LE 1M PHY) and Lowest channel was worse case mode. The report only reflects the test data of worst mode. - Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report. - During the testing process, the device was connected to TeraTerm via the serial port. By loading the test script, the transmission power level was set to 10.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 5Vdc, Extreme: Low 4.5Vdc, High 5.5Vdc
Test Engineer:	Hopper Li(Conducted measurement) Kiran Zeng(Radiated measurement)

3.5 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Occupied Channel Bandwidth	0.114 MHz
RF output power, conducted	0.70 dB
Power Spectral Density, conducted	0.70 dB
Unwanted Emissions, conducted	2.76 dB
Radiated Emission (9kHz ~ 30MHz) (3m SAC)	2.1 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.7 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (30MHz ~ 1000MHz) (10m SAC)	4.3 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	4.10 dB
Radiated Emission (1GHz ~ 18GHz) (3m FAR)	5.28 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.18 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.10 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
				12-09-2025	12-08-2030
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-03-2025	01-02-2026
				12-07-2025	12-06-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	08-09-2025	08-08-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	12-25-2024	12-24-2025
				12-04-2025	12-03-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-16-2024	12-15-2025
				12-07-2025	12-06-2026
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
				12-05-2025	12-04-2026
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-15-2025	01-14-2026
				01-14-2026	01-13-2027
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-15-2025	01-14-2026
				01-14-2026	01-13-2027
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-15-2025	01-14-2026
				01-14-2026	01-13-2027
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	04-24-2025	04-23-2026
				04-13-2026	04-12-2027
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	05-23-2025	05-22-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-25-2024	12-24-2025
				12-07-2025	12-06-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
				12-07-2025	12-06-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-25-2024	12-24-2025
				12-07-2025	12-06-2026
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-21-2025	04-20-2026
				03-30-2026	03-29-2027
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-21-2025	04-20-2026
				03-30-2026	03-29-2027
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
				12-05-2025	12-04-2026
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
				12-04-2025	12-03-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-28-2025	07-27-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-28-2025	07-27-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-28-2025	07-27-2026
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	08-08-2025	08-07-2026
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	12-17-2024	12-16-2026
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	08-08-2025	08-07-2026
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure

4.1 Test Channel


According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2405	20	2442	39	2480


4.2 Test Setup


1) Radiated emission measurement:

Below 30MHz (3m SAC)

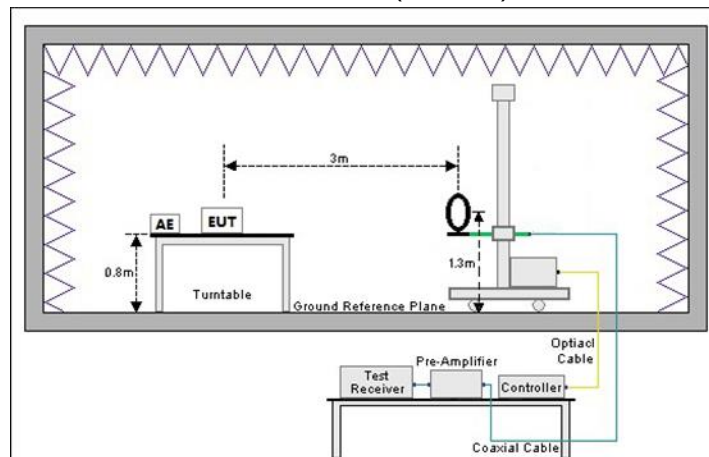

Below 1GHz (3m SAC)

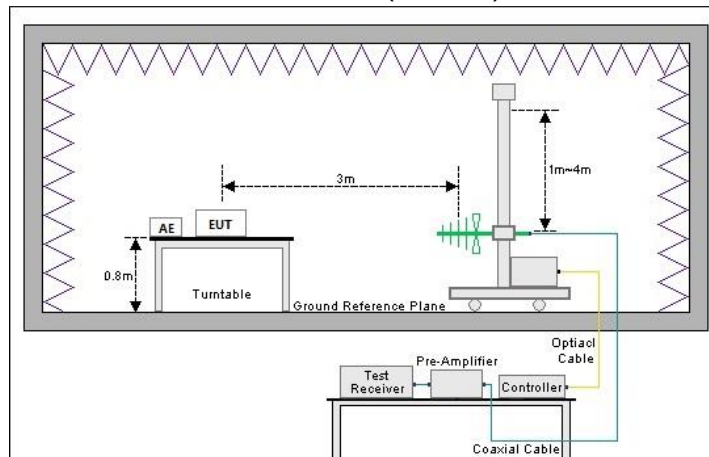

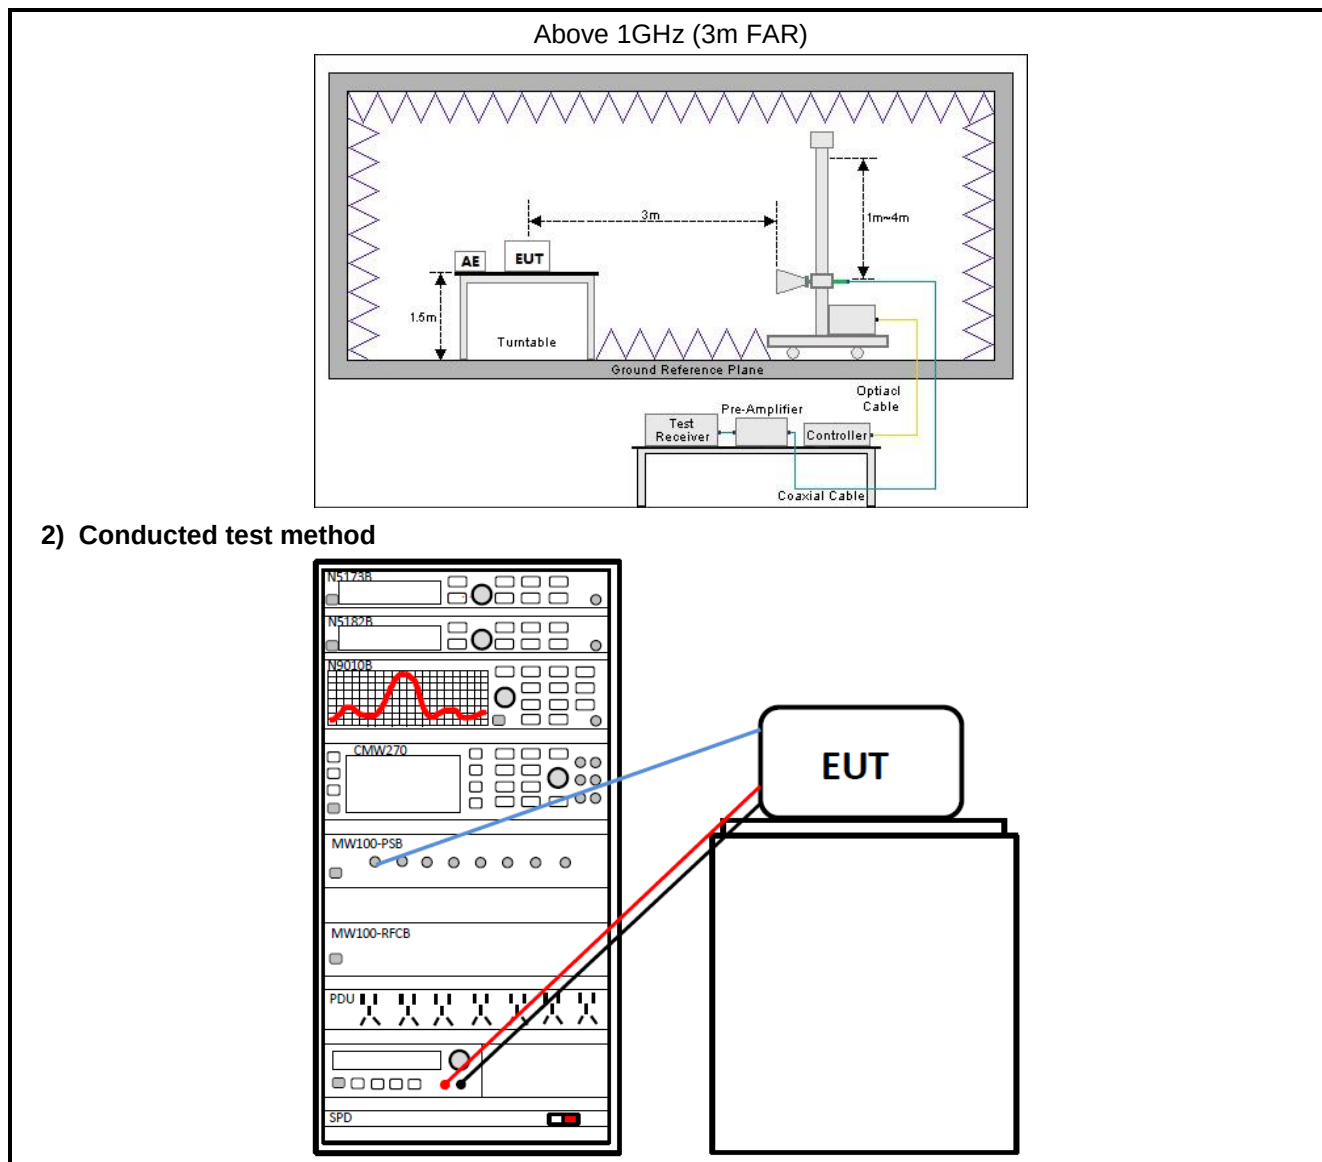

4.3 Test Procedure

Test method	Test step
Radiated emission	For below 30MHz: 1. The EUT was placed on the table top of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The BLE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test Method	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	/	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	ANSI C63.10 clause 6.2	N/A	N/A
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 clause 11.9.1.2 Method PKPM1	Appendix A – Zigbee	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 clause 11.8.1, ANSI C63.10 clause 6.9.3	Appendix A – Zigbee	Pass
Power Spectral Density	15.247 (e)	ANSI C63.10 clause 11.10.2	Appendix A – Zigbee	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	ANSI C63.10 clause 6.10.4	Appendix A – Zigbee	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	ANSI C63.10 clause 6.10.5, 11.12.1 and 11.12.2.5.2	See Section 5.3	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	ANSI C63.10 clause 6.3, 6.5, 6.6 and 11.12.2.5.2	See Section 5.4	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).				
Test Method:	ANSI C63.10-2020 KDB 558074 D01 15.247 Meas Guidance v05r02			

5.1.2 Test Limit


Test items	Limit																																								
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																																								
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																																								
99% Occupied Bandwidth	N/A																																								
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																																								
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																								
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBµV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><td colspan="4">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBµV/m) @ 3m</th><th rowspan="2">Peake</th></tr><tr><th colspan="2">Average</th></tr><tr><td>Above 1 GHz</td><td colspan="2">54.0</td><td>74.0</td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Limit (dBµV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Note: The more stringent limit applies at transition frequencies.				Frequency	Limit (dBµV/m) @ 3m		Peake	Average		Above 1 GHz	54.0		74.0	Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency (MHz)	Limit (dBµV/m)		Detector																																						
	@ 3m	@ 10m																																							
30 – 88	40.0	30.0	Quasi-peak																																						
88 – 216	43.5	33.5	Quasi-peak																																						
216 – 960	46.0	36.0	Quasi-peak																																						
960 – 1000	54.0	44.0	Quasi-peak																																						
Note: The more stringent limit applies at transition frequencies.																																									
Frequency	Limit (dBµV/m) @ 3m		Peake																																						
	Average																																								
Above 1 GHz	54.0		74.0																																						
Note: The measurement bandwidth shall be 1 MHz or greater.																																									

5.2 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The ZigBee antenna is an External antenna, and The EUT and its antenna need to be installed by professional personnel. The best case gain of the antenna is 14 dBi. See product internal photos for details.	

5.3 Emissions in Restricted Frequency Bands

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Reiy Ren	Test mode:	ZigBee mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

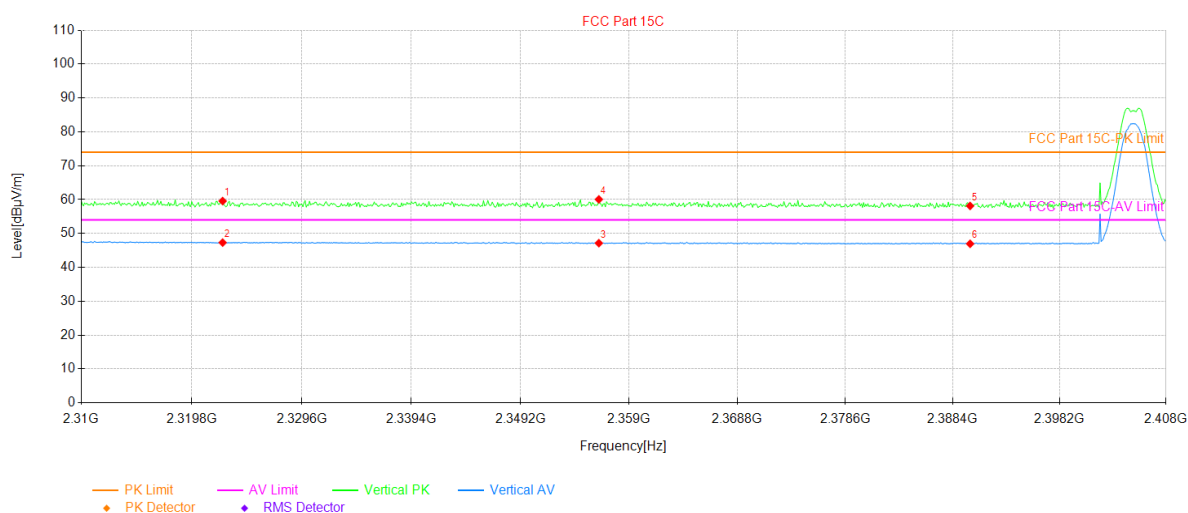


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2322.54	23.55	36.02	59.57	74.00	14.43	239	PK	PASS	Vertical
2	2322.54	11.30	36.02	47.32	54.00	6.68	242	AV	PASS	Vertical
3	2356.26	11.06	36.09	47.15	54.00	6.85	74	AV	PASS	Vertical
4	2356.26	23.97	36.09	60.06	74.00	13.94	54	PK	PASS	Vertical
5	2390.00	21.94	36.19	58.13	74.00	15.87	242	PK	PASS	Vertical
6	2390.00	10.77	36.19	46.96	54.00	7.04	185	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Reiy Ren	Test mode:	ZigBee mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

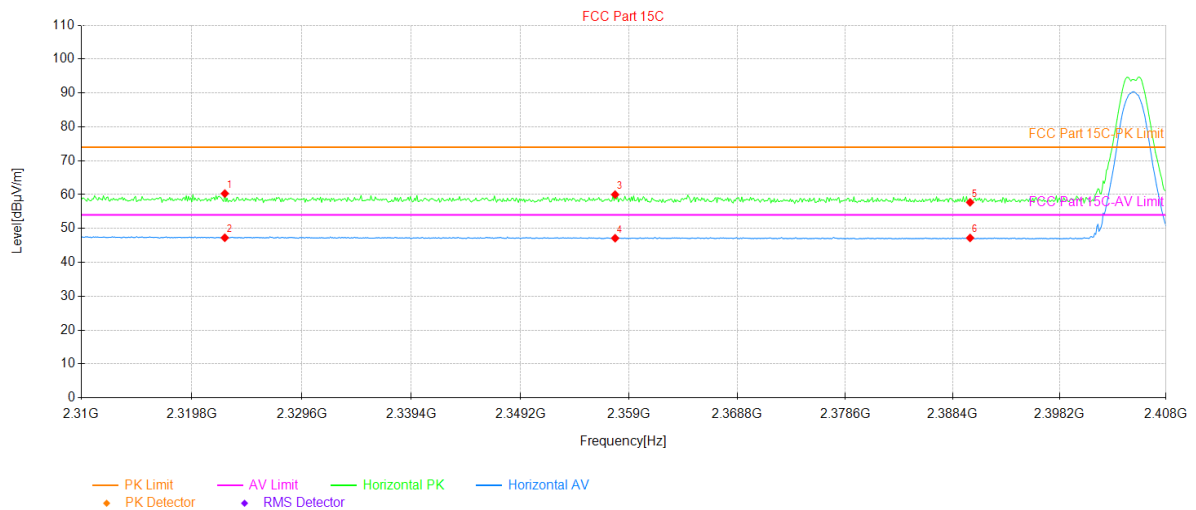


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2322.74	24.29	36.02	60.31	74.00	13.69	303	PK	PASS	Horizontal
2	2322.74	11.24	36.02	47.26	54.00	6.74	89	AV	PASS	Horizontal
3	2357.73	23.91	36.09	60.00	74.00	14.00	254	PK	PASS	Horizontal
4	2357.73	11.04	36.09	47.13	54.00	6.87	144	AV	PASS	Horizontal
5	2390.00	21.53	36.19	57.72	74.00	16.28	36	PK	PASS	Horizontal
6	2390.00	11.02	36.19	47.21	54.00	6.79	194	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Reiy Ren	Test mode:	ZigBee mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

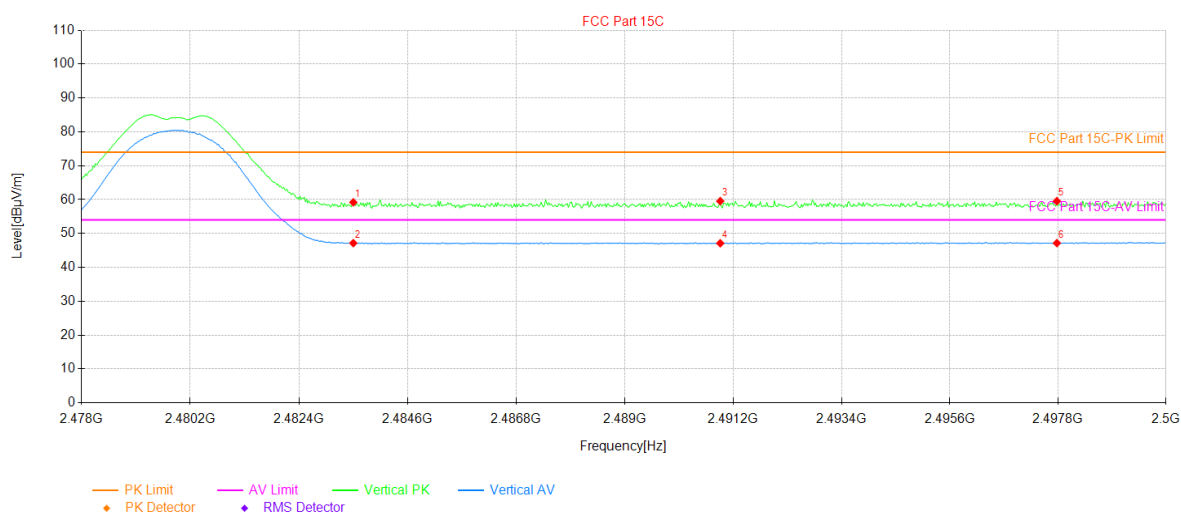


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.96	36.24	59.20	74.00	14.80	195	PK	PASS	Vertical
2	2483.50	10.91	36.24	47.15	54.00	6.85	94	AV	PASS	Vertical
3	2490.94	23.24	36.30	59.54	74.00	14.46	75	PK	PASS	Vertical
4	2490.94	10.82	36.30	47.12	54.00	6.88	266	AV	PASS	Vertical
5	2497.78	23.18	36.36	59.54	74.00	14.46	109	PK	PASS	Vertical
6	2497.78	10.81	36.36	47.17	54.00	6.83	153	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Reiy Ren	Test mode:	ZigBee mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

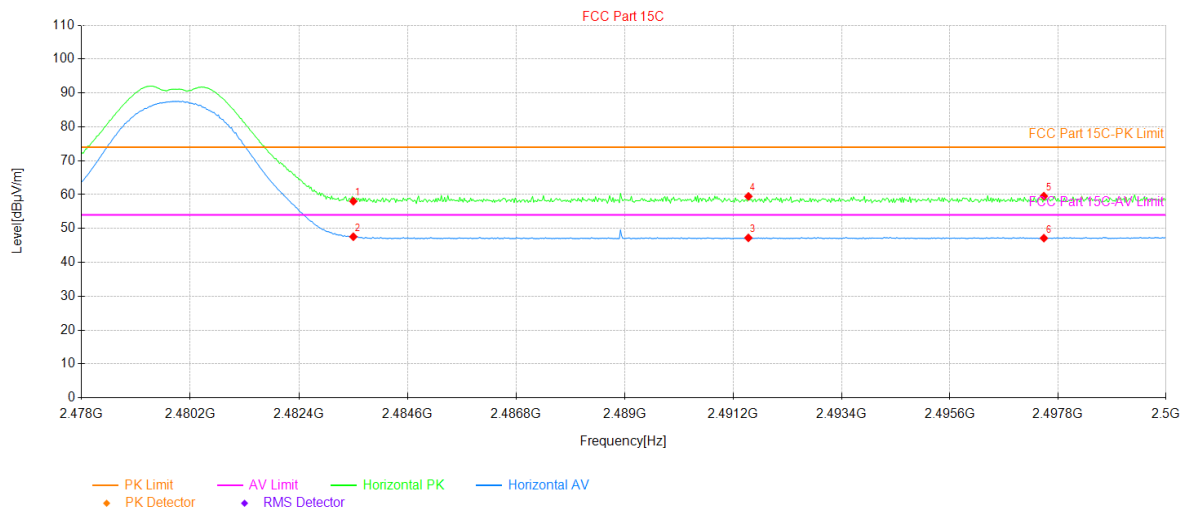

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.80	36.24	58.04	74.00	15.96	326	PK	PASS	Horizontal
2	2483.50	11.33	36.24	47.57	54.00	6.43	326	AV	PASS	Horizontal
3	2491.51	10.92	36.31	47.23	54.00	6.77	86	AV	PASS	Horizontal
4	2491.51	23.16	36.31	59.47	74.00	14.53	244	PK	PASS	Horizontal
5	2497.51	23.20	36.36	59.56	74.00	14.44	0	PK	PASS	Horizontal
6	2497.51	10.79	36.36	47.15	54.00	6.85	67	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).


5.4 Emissions in Non-restricted Frequency Bands

Below 30MHz:

Test Frequency from 9kHz to 30MHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Below 1GHz:

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 5V		

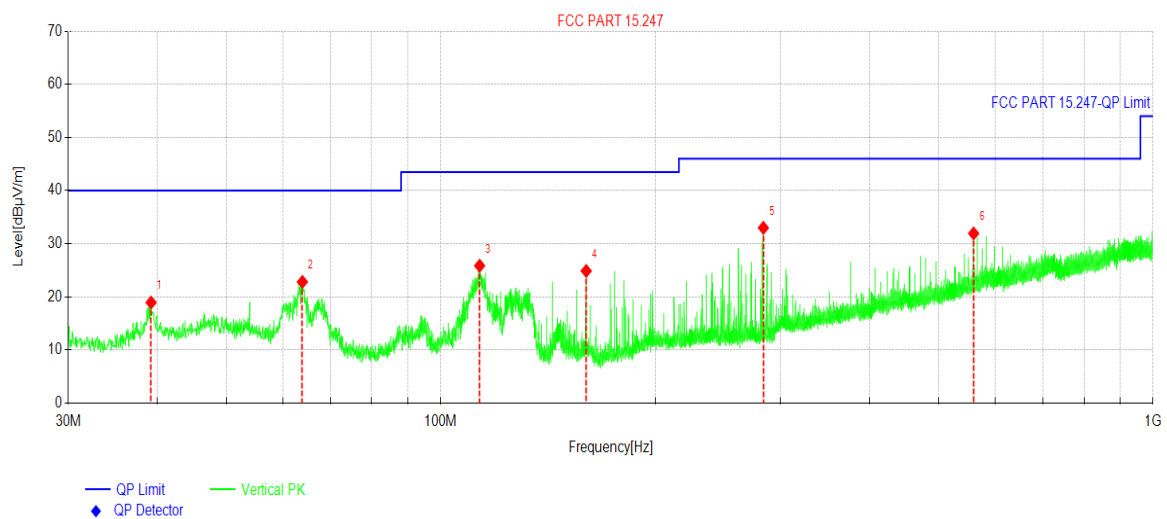


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	39.2150	32.72	-13.79	18.93	40.00	21.07	PK	Vertical
2	63.9500	37.68	-14.86	22.82	40.00	17.18	PK	Vertical
3	113.4200	41.00	-15.14	25.86	43.50	17.64	PK	Vertical
4	160.0770	42.30	-17.42	24.88	43.50	18.62	PK	Vertical
5	283.8005	46.28	-13.28	33.00	46.00	13.00	PK	Vertical
6	560.0080	37.89	-5.95	31.94	46.00	14.06	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 5V		

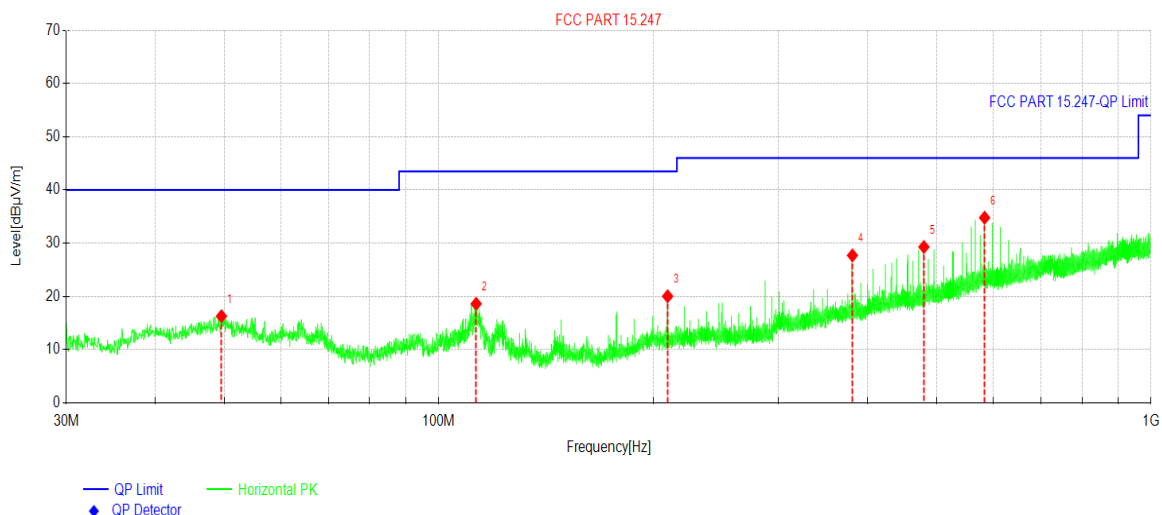


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	49.5455	28.95	-12.67	16.28	40.00	23.72	PK	Horizontal
2	112.8865	33.68	-15.07	18.61	43.50	24.89	PK	Horizontal
3	209.5955	34.99	-14.96	20.03	43.50	23.47	PK	Horizontal
4	380.9460	38.15	-10.44	27.71	46.00	18.29	PK	Horizontal
5	479.9830	37.59	-8.30	29.29	46.00	16.71	PK	Horizontal
6	583.9670	40.10	-5.32	34.78	46.00	11.22	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee LCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Vertical
Test Voltage:	DC 5V		

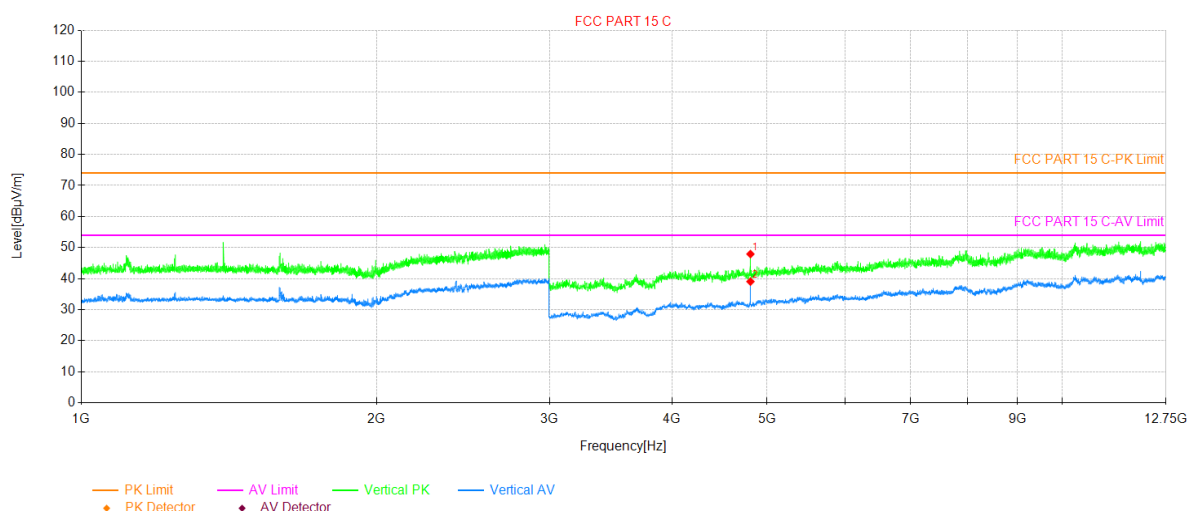


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4810.00	56.36	-8.40	47.96	74.00	26.01	PK	Vertical
2	4810.00	47.51	-8.40	39.11	54.00	14.89	AV	Vertical

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee LCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Horizontal
Test Voltage:	DC 5V		

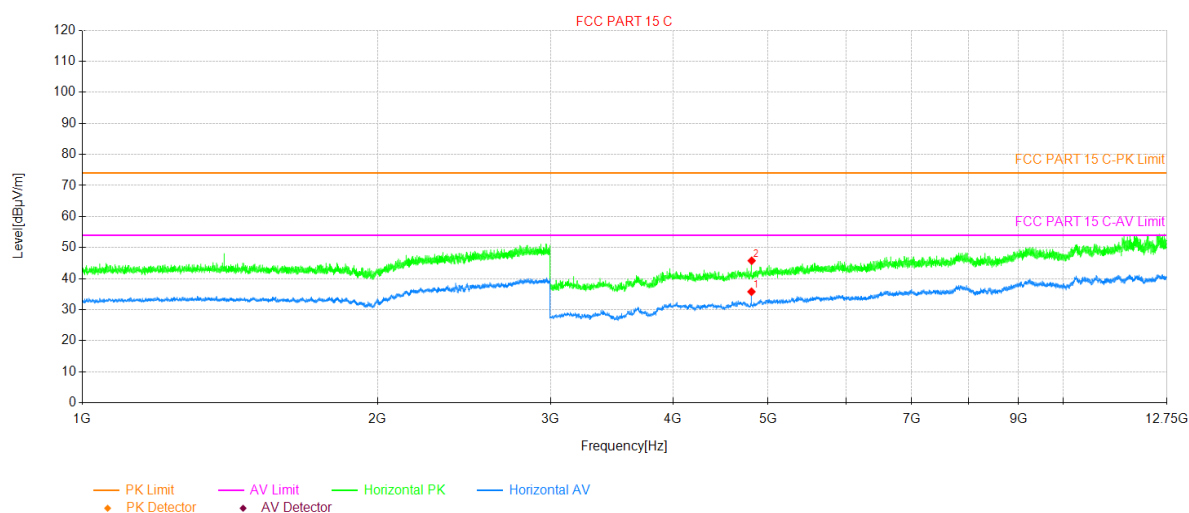


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4810.00	44.23	-8.40	35.83	54.00	18.17	AV	Horizontal
2	4810.00	54.18	-8.40	45.78	74.00	28.22	PK	Horizontal

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee MCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Vertical
Test Voltage:	DC 5V		

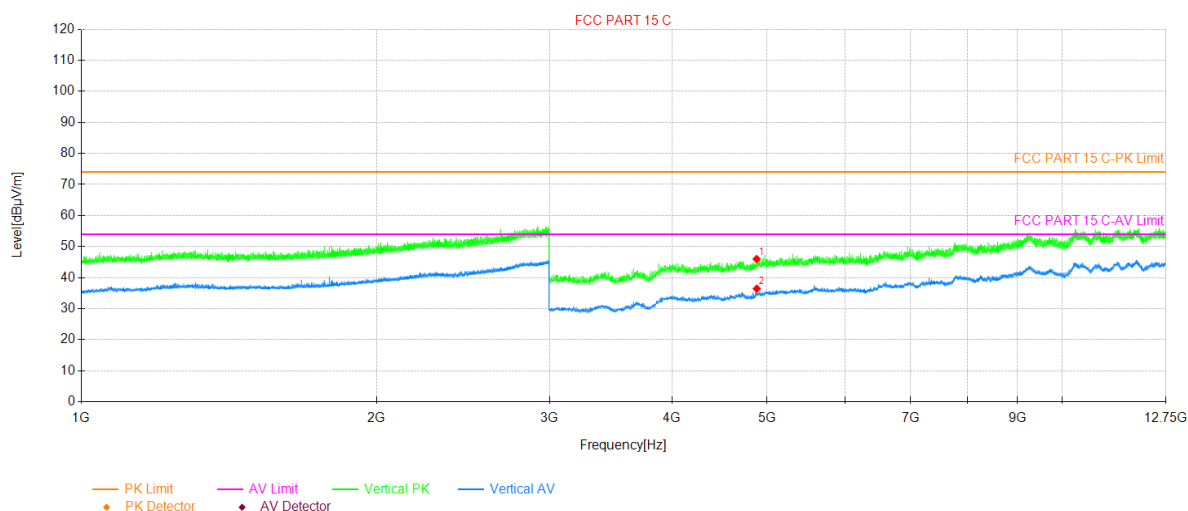


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4880.00	56.80	-7.81	46.79	74.00	27.21	PK	Vertical
2	4880.00	44.36	-7.81	36.55	54.00	17.45	AV	Vertical

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee MCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Horizontal
Test Voltage:	DC 5V		

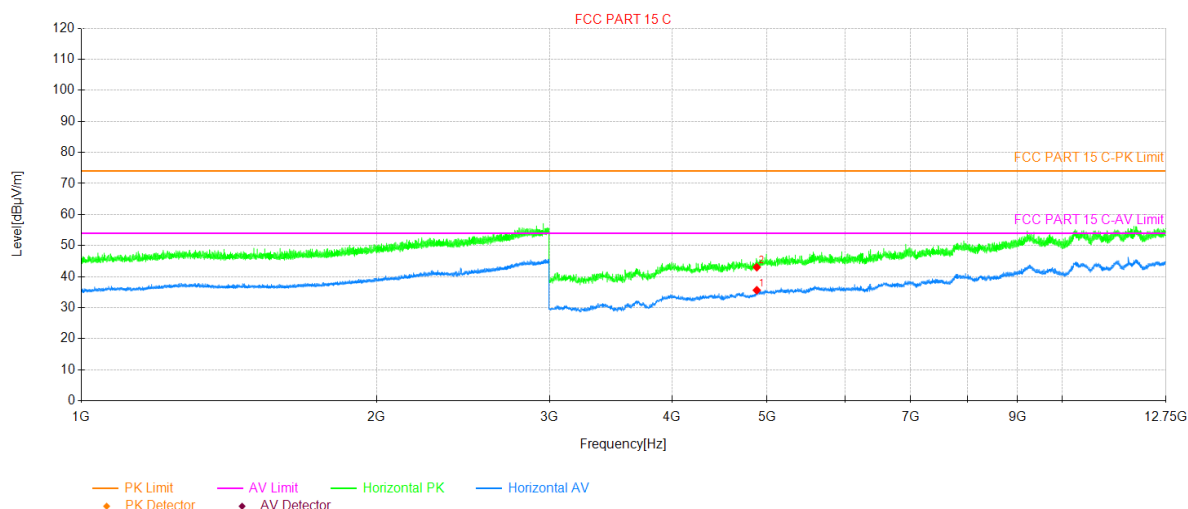


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4880.00	44.23	-7.81	35.83	54.00	18.17	AV	Horizontal
2	4880.00	54.60	-7.81	46.79	74.00	27.21	PK	Horizontal

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee HCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Vertical
Test Voltage:	DC 5V		

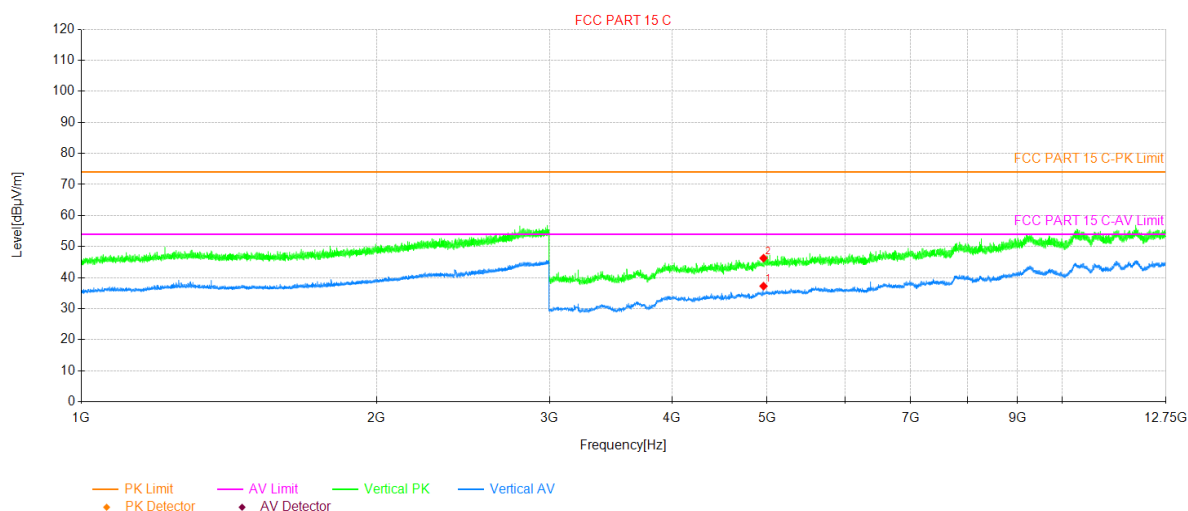


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4960.00	48.13	-7.38	40.75	54.00	13.25	PK	Vertical
2	4960.00	56.57	-7.38	49.19	74.00	24.81	AV	Vertical

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART SERVER ANTENNA MODULE	Product Model:	J3-1414-30-0A1C
Test By:	Kiran Zeng	Test mode:	ZigBee HCH TX mode
Test Frequency:	1000MHz ~ 12750 MHz	Polarization:	Horizontal
Test Voltage:	DC 5V		

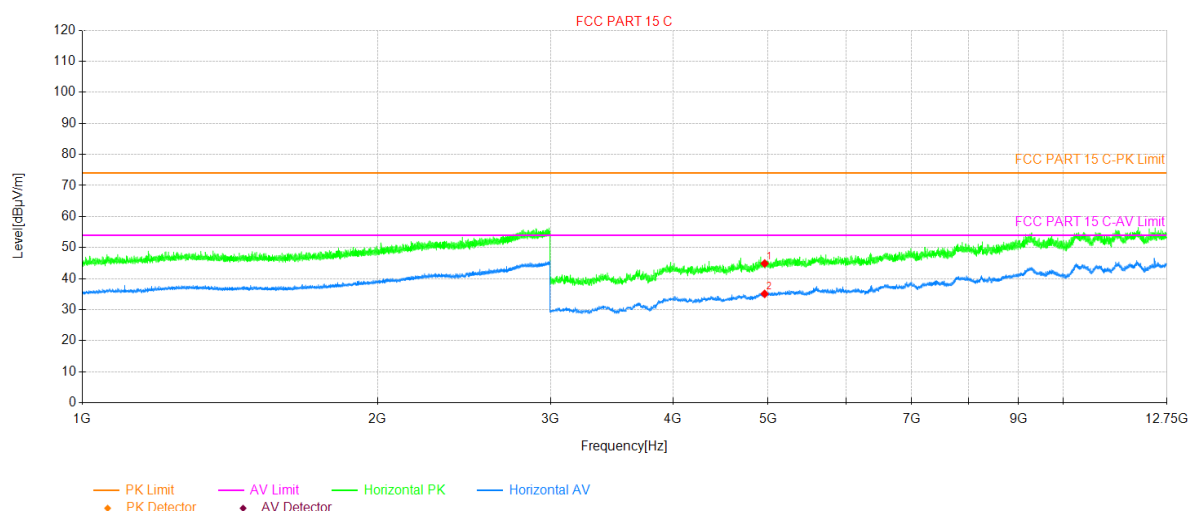

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	4960.00	54.14	-7.38	46.76	74.00	27.24	AV	Horizontal
2	4960.00	44.45	-7.38	37.07	54.00	16.93	PK	Horizontal

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

-----End of report-----