15.4 TEST DATA

[TestMode: TX mode]; [Line: Nutral]; [Power:120V/60Hz]

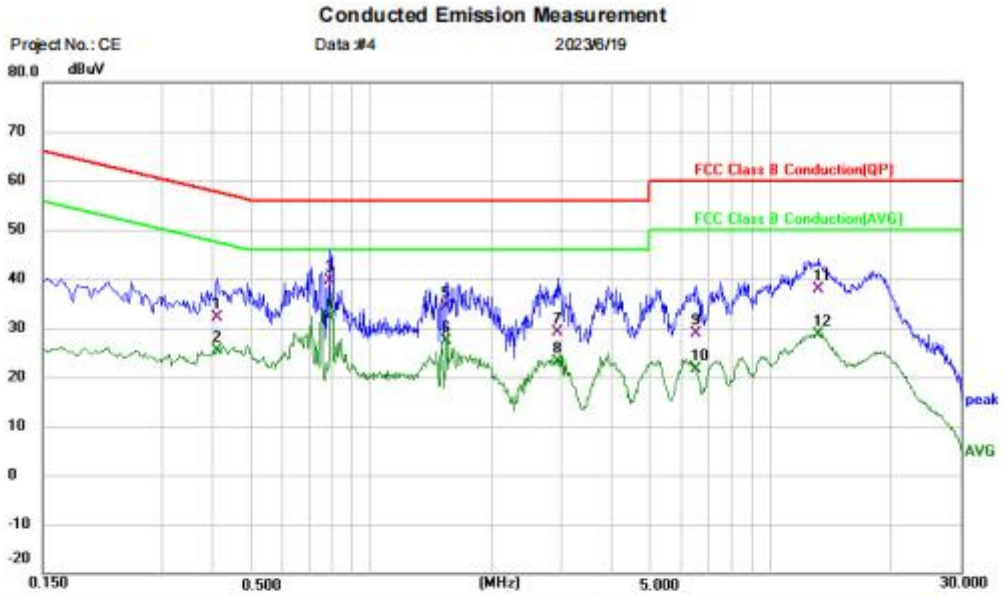

Site
Limit: FCC Class B Conduction(QP)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX mode
Note:

Phase: N
Power:
Distance:
RBW: 9 KHz
VBW: 30 KHz

Temperature: (C)
Humidity: %RH
Sweep Time: 10 ms

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree	Comment
1		0.4100	22.02	10.05	32.07	57.65	-25.58	QP			
2		0.4100	15.26	10.05	25.31	47.65	-22.34	AVG			
3		0.7900	29.72	10.02	39.74	56.00	-16.26	QP			
4	*	0.7900	22.21	10.02	32.23	46.00	-13.77	AVG			
5		1.5420	24.24	10.06	34.30	56.00	-21.70	QP			
6		1.5420	17.29	10.06	27.35	46.00	-18.65	AVG			
7		2.9260	19.06	10.03	29.09	56.00	-26.91	QP			
8		2.9260	13.02	10.03	23.05	46.00	-22.95	AVG			
9		6.5020	19.00	9.85	28.85	60.00	-31.15	QP			
10		6.5020	11.86	9.85	21.71	50.00	-28.29	AVG			
11		13.1780	27.78	9.99	37.77	60.00	-22.23	QP			
12		13.1780	18.53	9.99	28.52	50.00	-21.48	AVG			

Test Result: Pass

[TestMode: TX mode]; [Line: Line]; [Power:120V/60Hz]

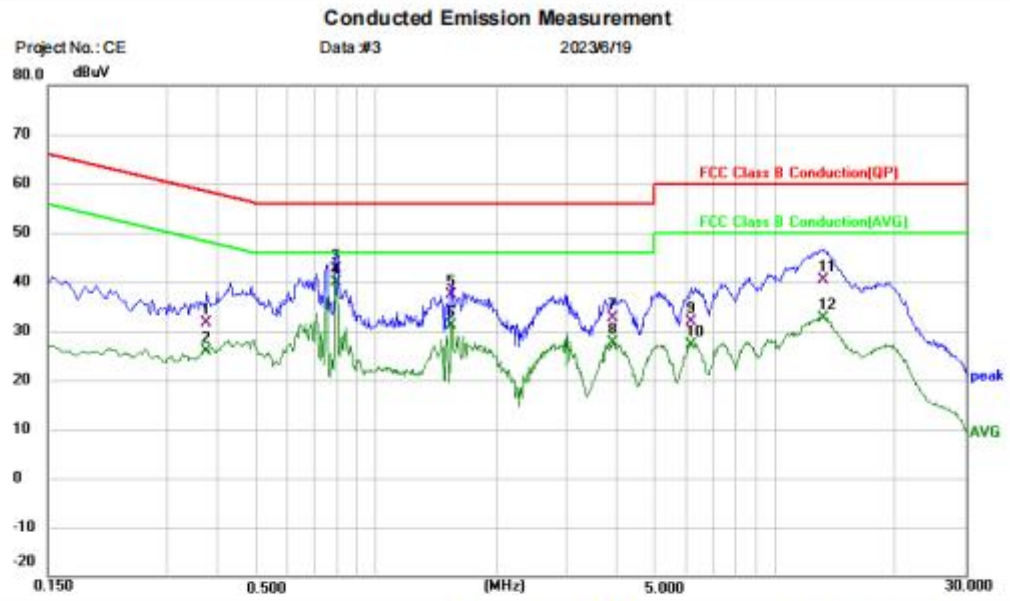

Site		Phase:	L1	Temperature: (C)
Limit: FCC Class B Conduction(QP)		Power:		Humidity: %RH
EUT: Sound amplifier		Distance:	RBW: 9 KHz	
M/N: discovery CR430S B			VBW: 30 KHz	Sweep Time: 10 ms
Mode: TX mode				
Note:				

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree	Comment
1		0.3740	21.58	10.07	31.65	58.41	-26.76	QP			
2		0.3740	15.89	10.07	25.96	48.41	-22.45	AVG			
3		0.7940	32.59	10.09	42.68	56.00	-13.32	QP			
4	*	0.7940	29.73	10.09	39.82	46.00	-6.18	AVG			
5		1.5420	27.04	10.22	37.26	56.00	-18.74	QP			
6		1.5420	20.90	10.22	31.12	46.00	-14.88	AVG			
7		3.9020	22.61	10.11	32.72	56.00	-23.28	QP			
8		3.9020	17.61	10.11	27.72	46.00	-18.28	AVG			
9		6.1340	21.77	10.04	31.81	60.00	-28.19	QP			
10		6.1340	17.17	10.04	27.21	50.00	-22.79	AVG			
11		13.2020	30.29	10.00	40.29	60.00	-19.71	QP			
12		13.2020	22.56	10.00	32.56	50.00	-17.44	AVG			

Test Result: Pass

16 RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

16.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BlueAsia

16.2 BLOCK DIAGRAM OF TEST SETUP

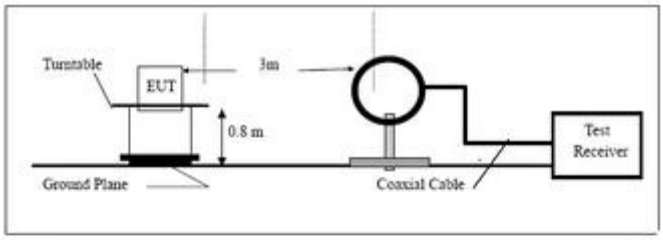

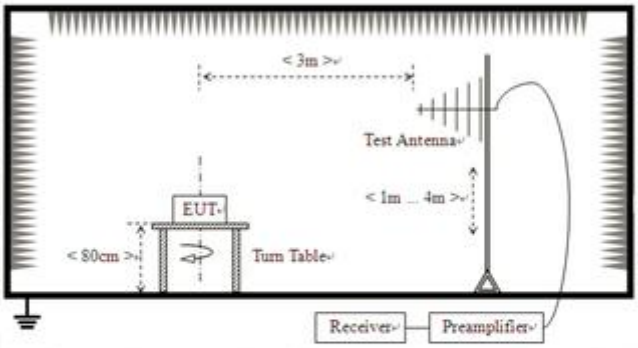

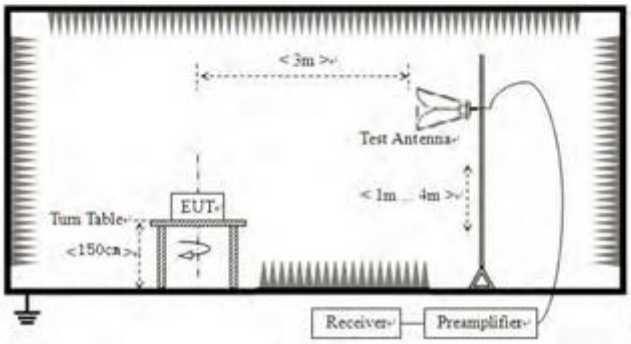

16.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.

Remark:
1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.fundamental frequency is blocked by filter, and only spurious emission is shown.
4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

16.4 TEST DATA

Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

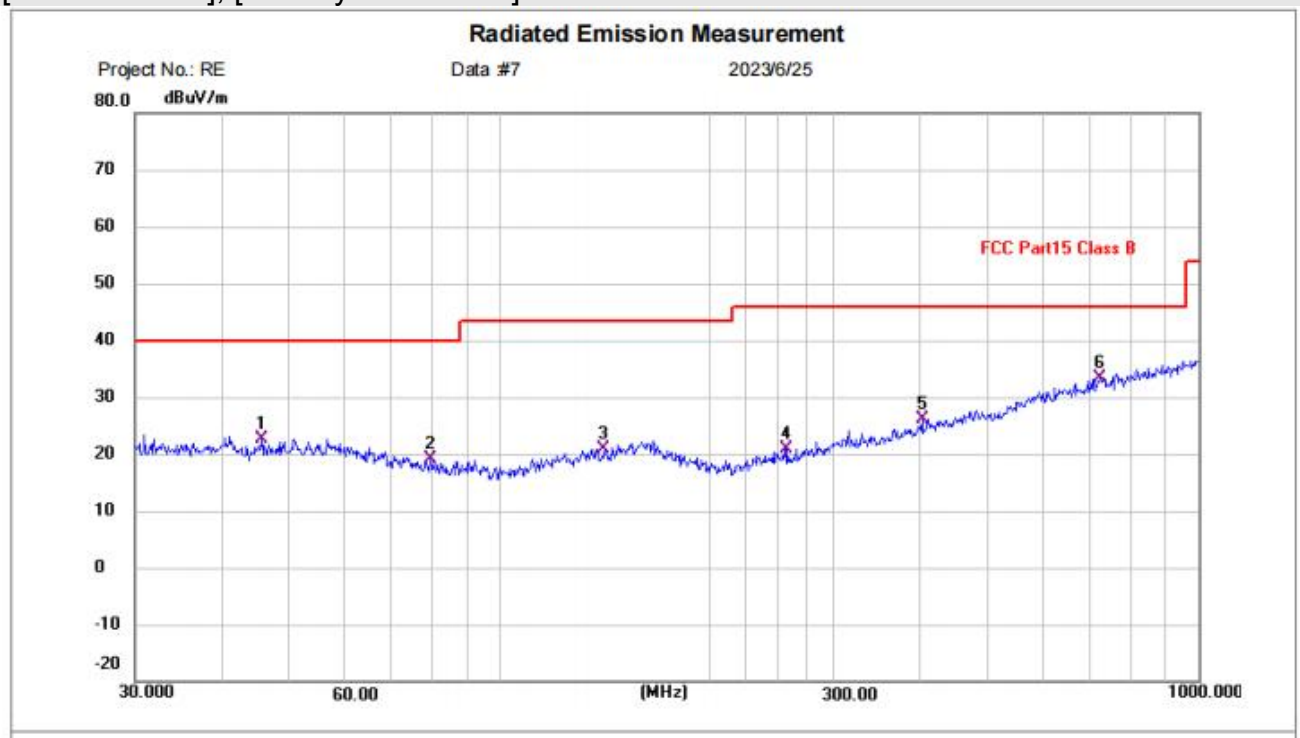

Site
Limit: FCC Part15 Class B
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX mode
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	45.5348	-0.65	23.31	22.66	40.00	-17.34	QP	P	
2	79.5209	0.27	18.76	19.03	40.00	-20.97	QP	P	
3	141.3296	-1.76	22.56	20.80	43.50	-22.70	QP	P	
4	257.4221	-0.67	21.58	20.91	46.00	-25.09	QP	P	
5	401.8384	0.15	25.98	26.13	46.00	-19.87	QP	P	
6 *	721.7258	0.70	32.56	33.26	46.00	-12.74	QP	P	

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

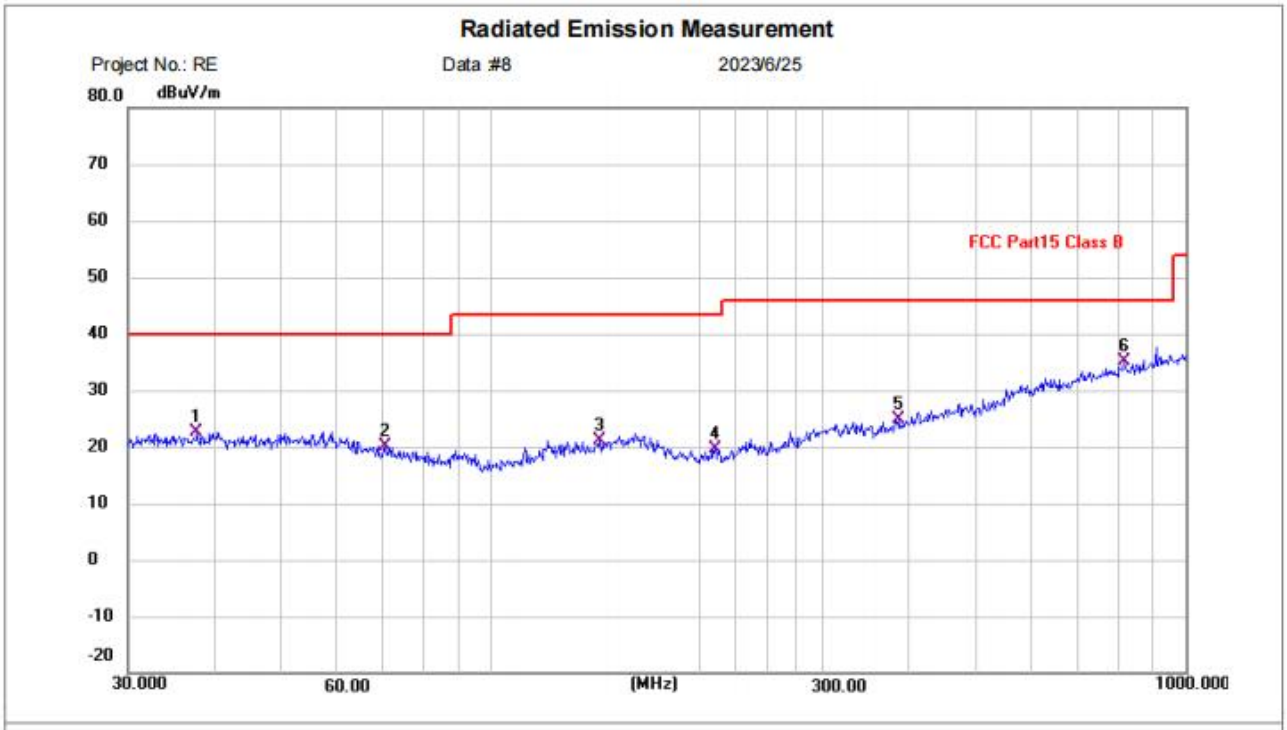

Site
Limit: FCC Part15 Class B
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX mode
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	37.6797	-0.46	23.08	22.62	40.00	-17.38	QP	P	
2	70.3365	-0.58	20.69	20.11	40.00	-19.89	QP	P	
3	143.3260	-1.15	22.22	21.07	43.50	-22.43	QP	P	
4	210.0481	-0.51	20.03	19.52	43.50	-23.98	QP	P	
5	385.2804	-0.77	25.63	24.86	46.00	-21.14	QP	P	
6 *	815.9678	0.75	34.27	35.02	46.00	-10.98	QP	P	

Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Vertical]

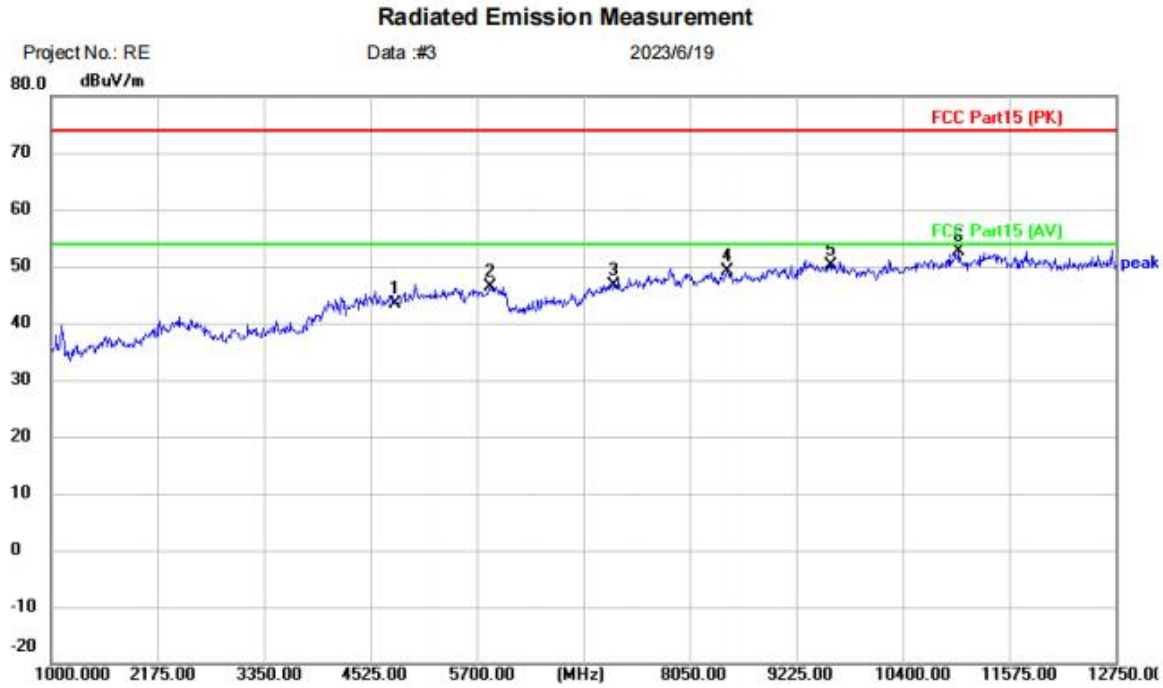

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-L
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	38.77	4.51	43.28	74.00	-30.72	peak	
2		5852.750	39.83	6.58	46.41	74.00	-27.59	peak	
3		7206.000	39.26	7.41	46.67	74.00	-27.33	peak	
4		8461.250	39.97	9.25	49.22	74.00	-24.78	peak	
5		9608.000	38.50	11.59	50.09	74.00	-23.91	peak	
6	*	11022.75	38.94	13.69	52.63	74.00	-21.37	peak	

Test Result: Pass

[TestMode:TX lowest channel]; [Polarity: Horizontal]

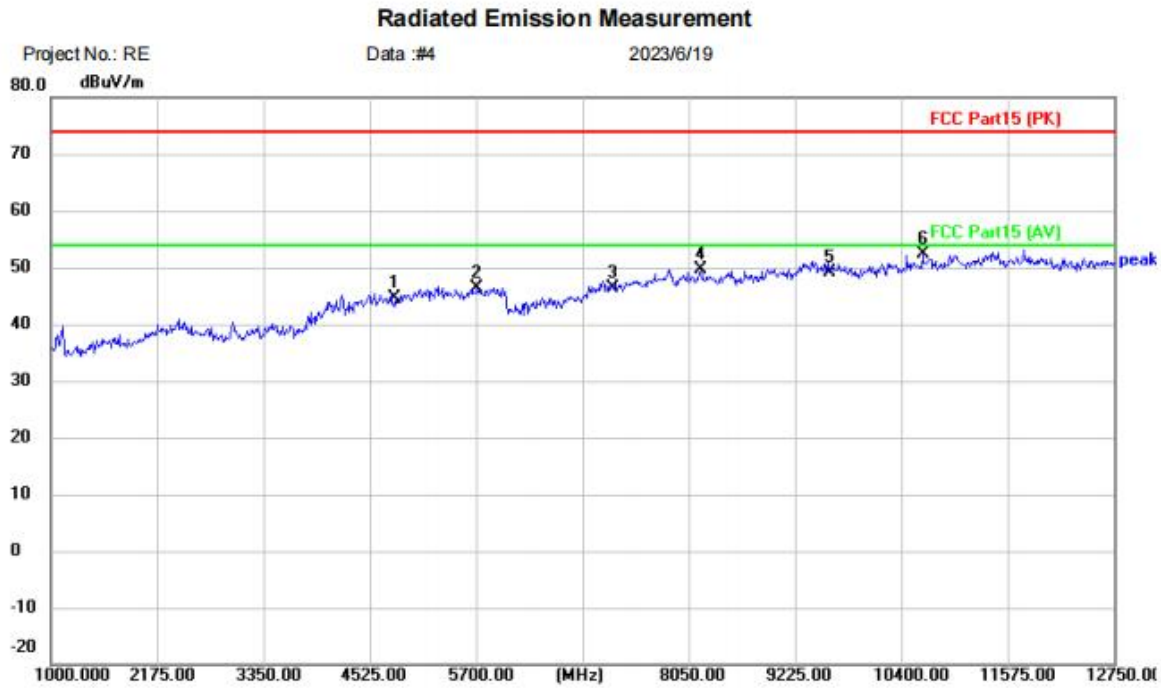

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-L
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	40.13	4.51	44.64	74.00	-29.36	peak	
2		5711.750	39.95	6.42	46.37	74.00	-27.63	peak	
3		7206.000	39.05	7.41	46.46	74.00	-27.54	peak	
4		8179.250	40.95	8.59	49.54	74.00	-24.46	peak	
5		9608.000	37.58	11.59	49.17	74.00	-24.83	peak	
6	*	10635.00	39.37	13.02	52.39	74.00	-21.61	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

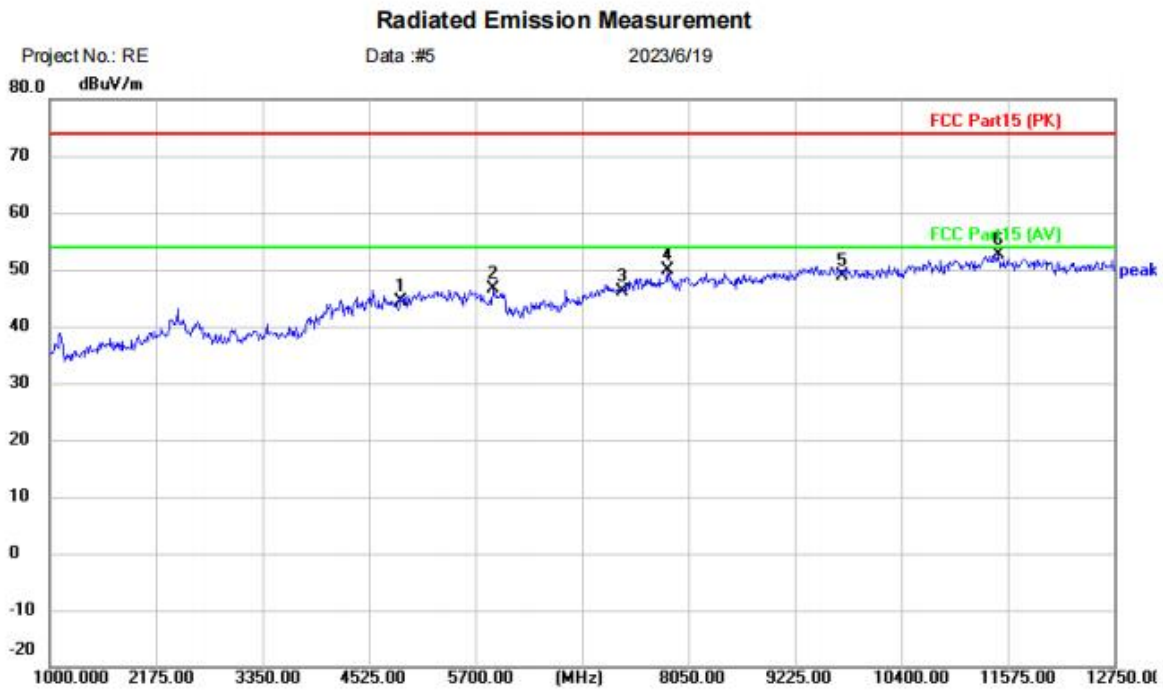

Site
Polarization: ***Horizontal***
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-M
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	39.87	4.60	44.47	74.00	-29.53	peak	
2		5888.000	39.89	6.71	46.60	74.00	-27.40	peak	
3		7323.000	38.36	7.82	46.18	74.00	-27.82	peak	
4		7815.000	41.59	8.38	49.97	74.00	-24.03	peak	
5		9764.000	37.13	11.76	48.89	74.00	-25.11	peak	
6	*	11469.25	39.06	13.49	52.55	74.00	-21.45	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

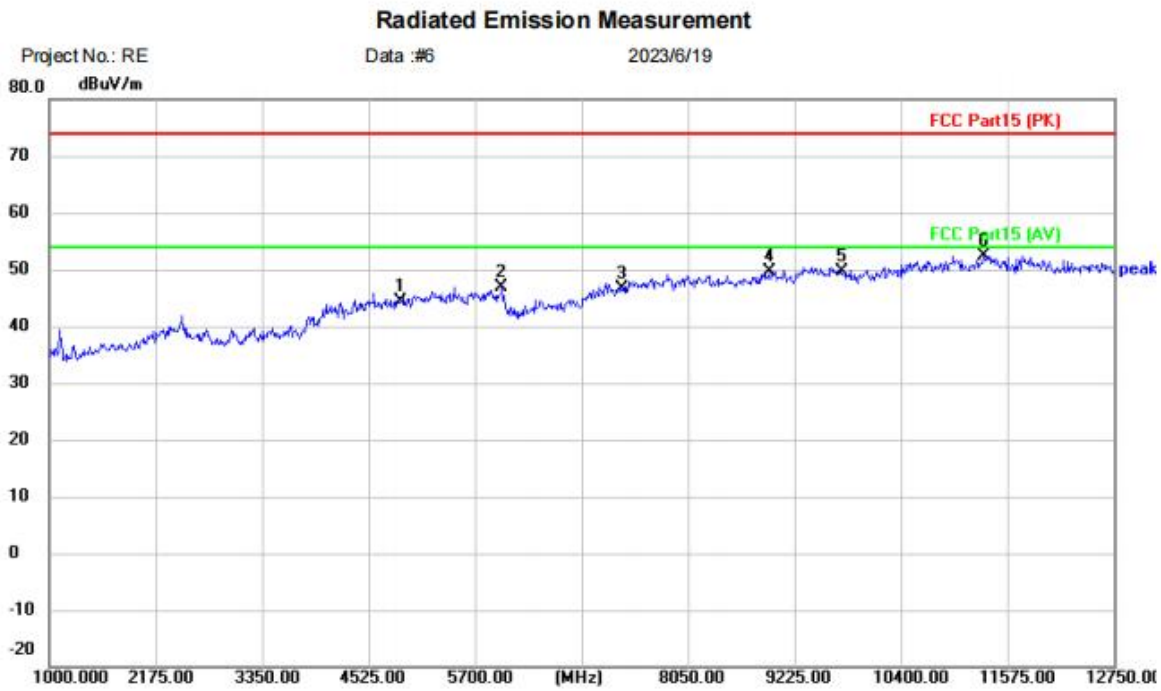

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-M
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	39.79	4.60	44.39	74.00	-29.61	peak	
2		5993.750	40.13	6.70	46.83	74.00	-27.17	peak	
3		7323.000	38.92	7.82	46.74	74.00	-27.26	peak	
4		8943.000	39.09	10.48	49.57	74.00	-24.43	peak	
5		9764.000	37.77	11.76	49.53	74.00	-24.47	peak	
6	*	11316.50	39.09	13.39	52.48	74.00	-21.52	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

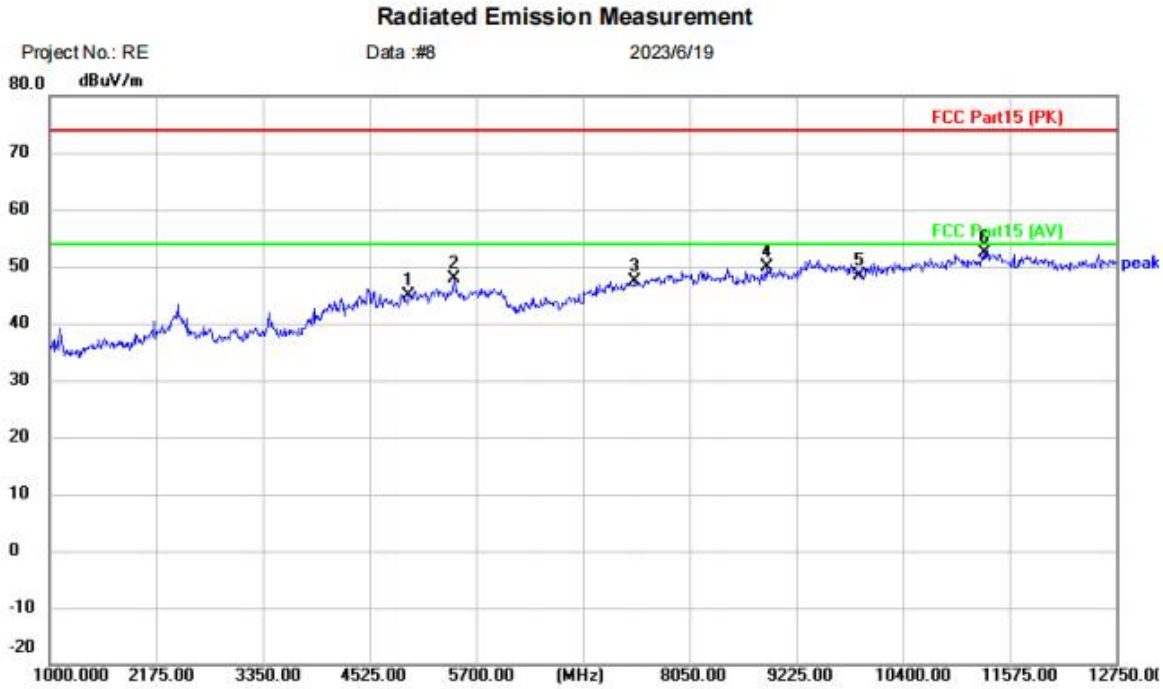

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-H
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	39.37	5.47	44.84	74.00	-29.16	peak	
2		5453.250	41.58	6.22	47.80	74.00	-26.20	peak	
3		7440.000	39.24	8.24	47.48	74.00	-26.52	peak	
4		8896.000	39.47	10.31	49.78	74.00	-24.22	peak	
5		9920.000	36.32	11.96	48.28	74.00	-25.72	peak	
6	*	11293.00	38.92	13.37	52.29	74.00	-21.71	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

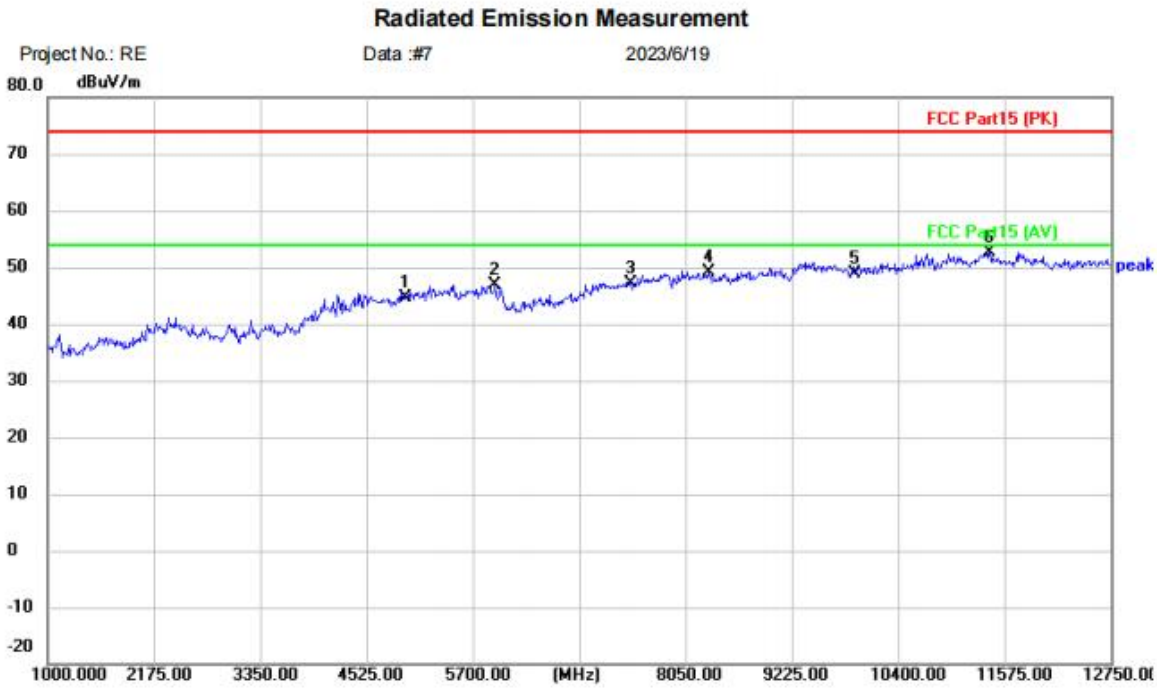

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-H
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	39.06	5.47	44.53	74.00	-29.47	peak	
2		5946.750	40.24	6.73	46.97	74.00	-27.03	peak	
3		7440.000	38.92	8.24	47.16	74.00	-26.84	peak	
4		8308.500	40.34	8.88	49.22	74.00	-24.78	peak	
5		9920.000	37.01	11.96	48.97	74.00	-25.03	peak	
6	*	11410.50	39.22	13.42	52.64	74.00	-21.36	peak	

Test Result: Pass

17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BlueAsia

17.2 BLOCK DIAGRAM OF TEST SETUP

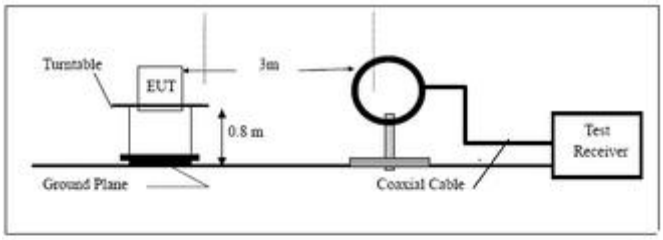

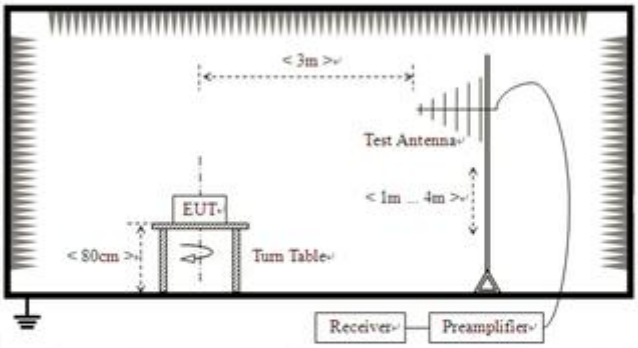

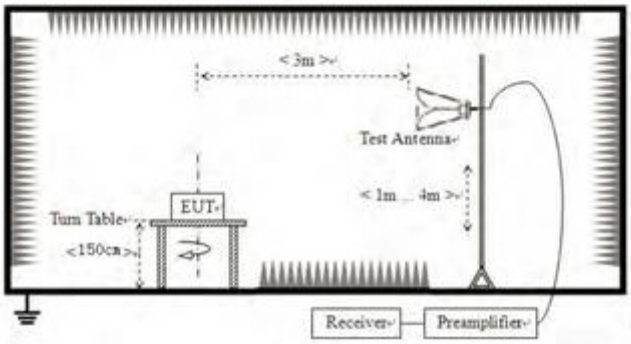

17.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.
Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

17.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

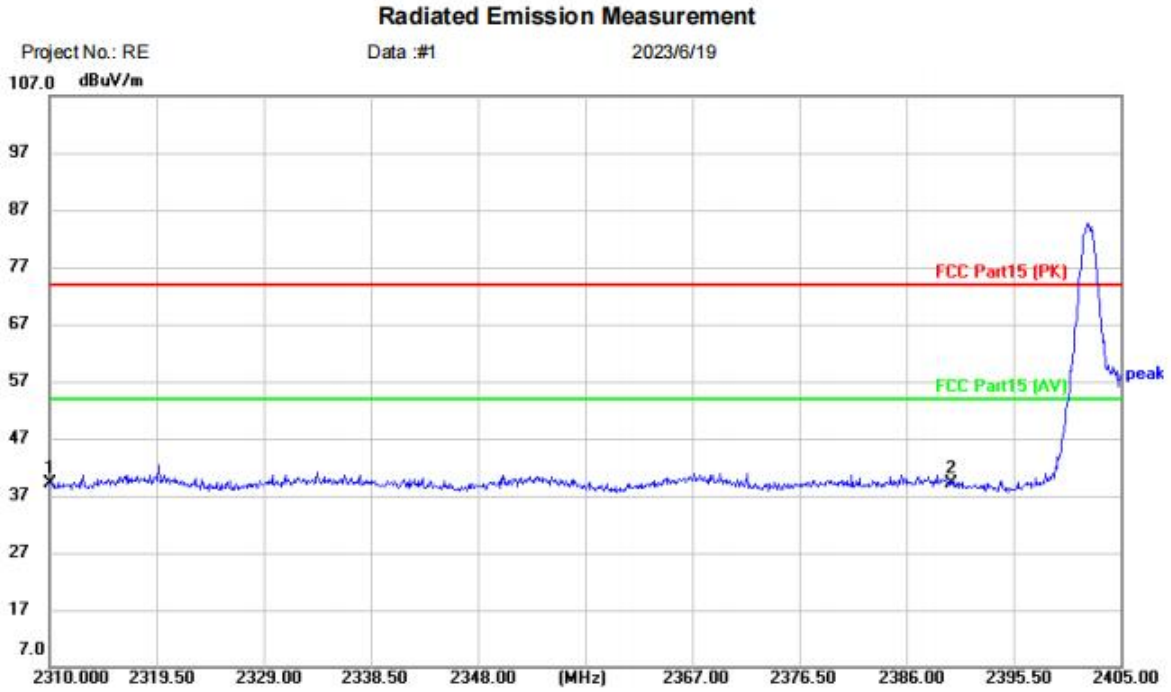

Site
Polarization: *Vertical*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	43.48	-4.40	39.08	74.00	-34.92	peak	
2	*	2390.000	43.50	-4.31	39.19	74.00	-34.81	peak	

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

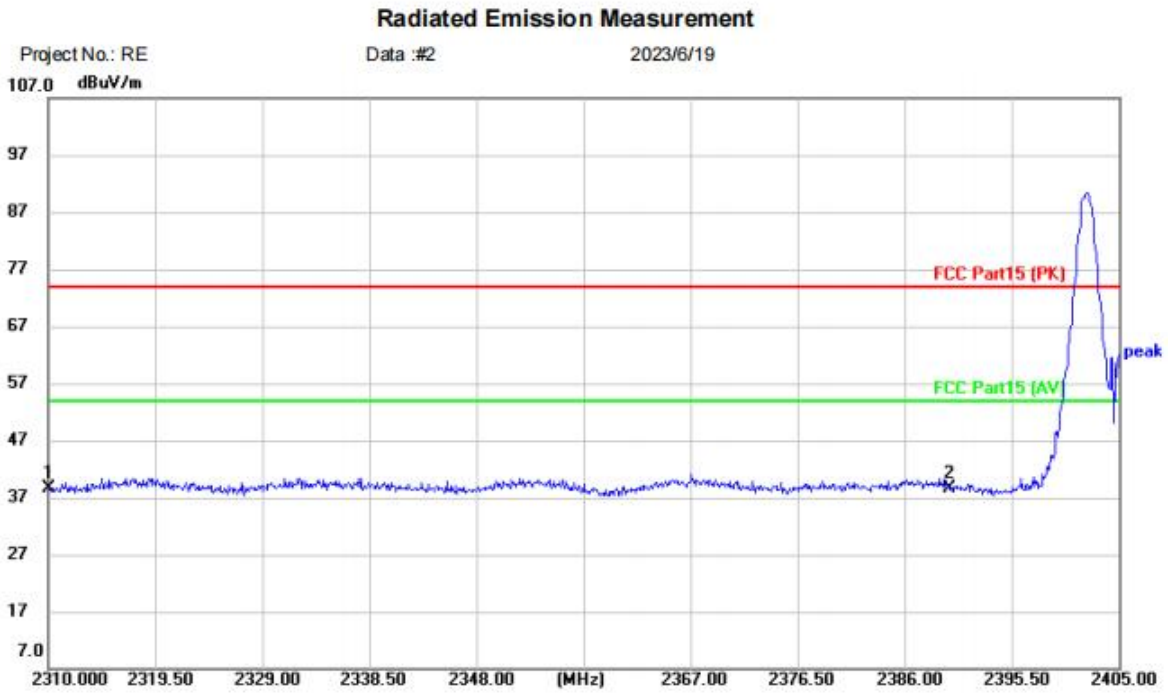

Site
Polarization: *Horizontal*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2310.000	43.14	-4.40	38.74	74.00	-35.26	peak	
2		2390.000	42.89	-4.31	38.58	74.00	-35.42	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

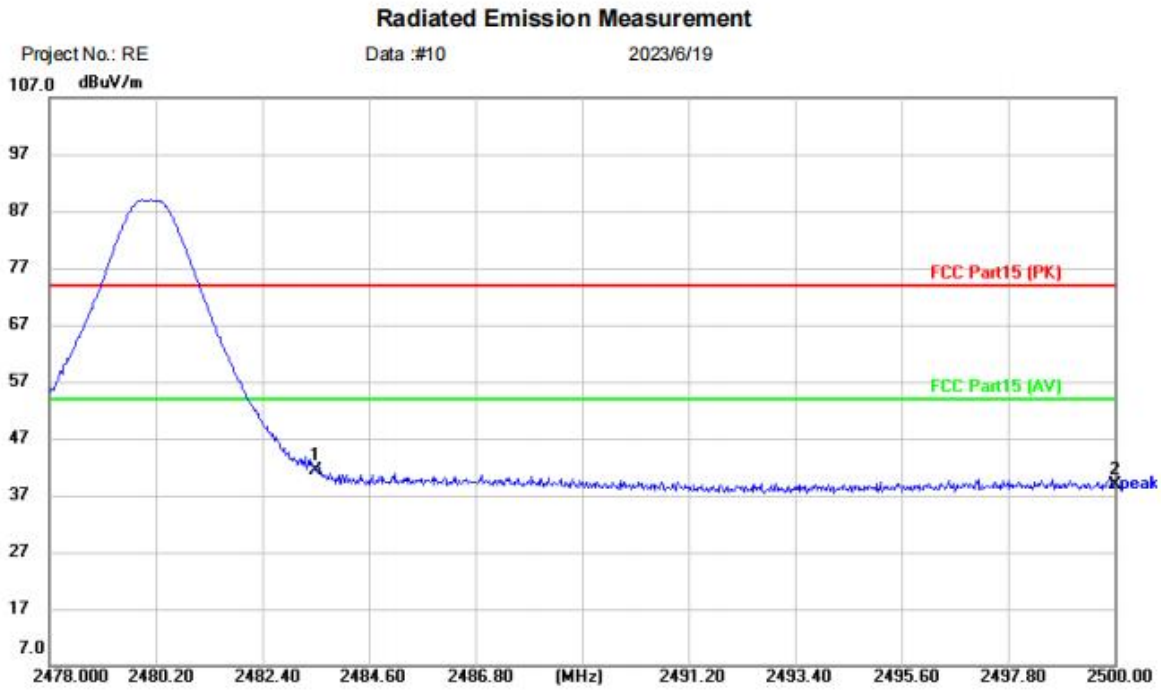

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-H
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	46.13	-4.64	41.49	74.00	-32.51	peak	
2		2500.000	43.60	-4.75	38.85	74.00	-35.15	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

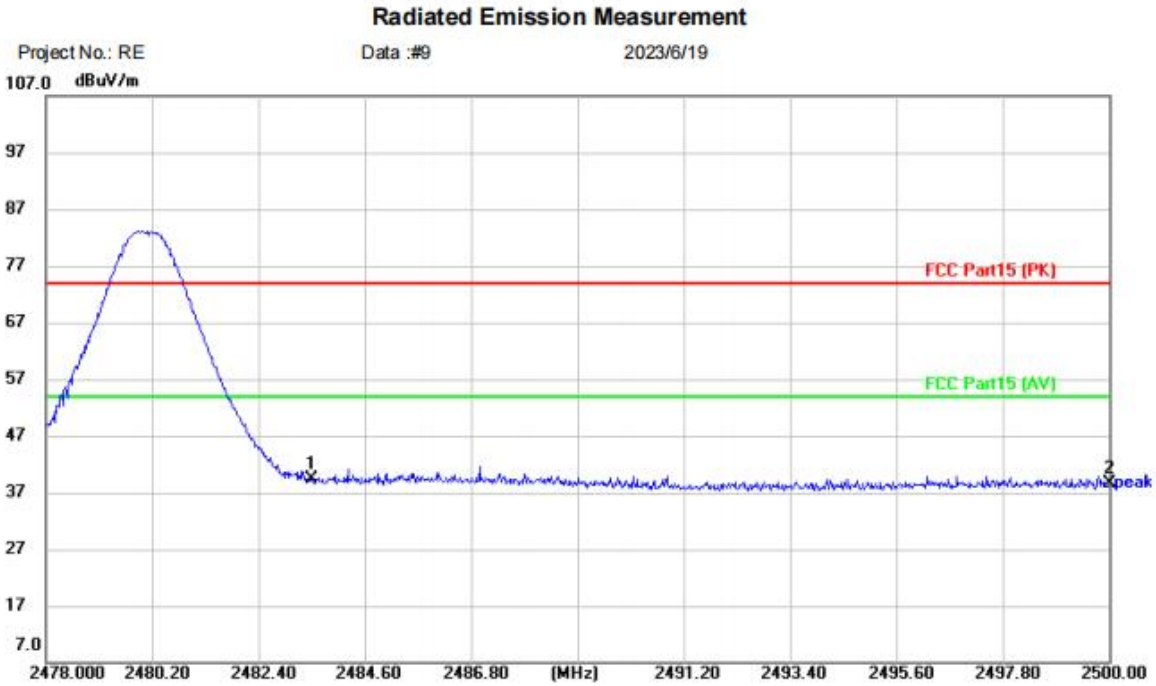

Site
Limit: FCC Part15 (PK)
EUT: Sound amplifier
M/N: discovery CR430S B
Mode: TX-H
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	43.96	-4.64	39.32	74.00	-34.68	peak	
2		2500.000	43.28	-4.75	38.53	74.00	-35.47	peak	

Test Result: Pass