

Test Report

Report No. : MTi260314001-0105E2

Date of Issue : 2026-04-20

Applicant : Superior communications

Product : Magnetic Wireless Charging Power Bank




Model(s) : 06892BK, 06926BK, 4708U

FCC ID : YJW-06892BK

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
2.1	Test laboratory	7
3	Test facilities and accreditations	8
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures	10
5.4	Information of test equipment	11
5.5	Test results	12
	Photographs of the Test Setup	24
	Photographs of the EUT	25

Test Result Certification		
Applicant	Superior communications	
Applicant Address	5027 Irwindale Ave, Suite 900, Irwindale Ave, California, United States	
Manufacturer	Shenzhen Powerqi Technology Co.,Ltd	
Manufacturer Address	Room 201, 302, 401 of A4 Building, Block A, Fangxing Science and Technology Park, No. 13 of Baonan Road, Longgang District, Shenzhen, China	
Factory1	Shenzhen Powerqi Technology Co.,Ltd	
Factory Address	Room 201, 302, 401 of A4 Building, Block A, Fangxing Science and Technology Park, No. 13 of Baonan Road, Longgang District, Shenzhen, China	
Factory2	SEOSIN ELECTRONICS VINA CO., LTD.	
Factory Address	Chau Son Park, Le Chan road, Le Hong Phong Ward, Phu Ly City, Ha Nam Province, Viet Nam	
Product description		
Product name	Magnetic Wireless Charging Power Bank	
Trademark	AT&T 	
Model name	06892BK	
Series Model(s)	06926BK, 4708U	
Standards	47 CFR PART 1, § 1.1310 47 CFR PART 2.1093	
Test Method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2026-04-10 to 2026-04-17	
Test result	Pass	
Prepared by:	Yanice Xie	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

1 General Description

1.1 Description of the EUT

Product name:	Magnetic Wireless Charging Power Bank
Model name:	06892BK
Series Model(s):	06926BK, 4708U
Model difference:	All the models are the same circuit and module, except the model name and factory.06892BK is made in China, 06926BK and 4708U are made in Viet Nam.
Electrical rating:	Capacity: 10000mAh (5000mAh*2PCS) Power: 5000mAh/7.4V /37Wh USB-C Input:5V=3A,9V=3A,12V=2.5A USB-C Output:5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A Wireless Charging Pad Output:25W Max
Accessories:	N/A
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi260314001-01-R001
RF specification:	
Operating frequency range:	115-205kHz(5W-10W) & 360kHz(MPP 15W-25W)
Modulation type:	ASK
Antenna type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Charging+Wireless Output(5W)
Mode2	Charging+Wireless Output(7.5W)
Mode3	Charging+Wireless Output(10W)
Mode4	Wireless Output(5W)
Mode5	Wireless Output(7.5W)
Mode6	Wireless Output(10W)
Mode7	Wireless Output(MPP 15W)
Mode8	Wireless Output(25W)
Mode9	Stand by

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	S9+	R28K34V79NT	Samsung
Mobile phone	iPhone 16 Pro max	JMJJ7C5G6Y	Apple
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

3 Test facilities and accreditations**4 List of test equipment**

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+E3D	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

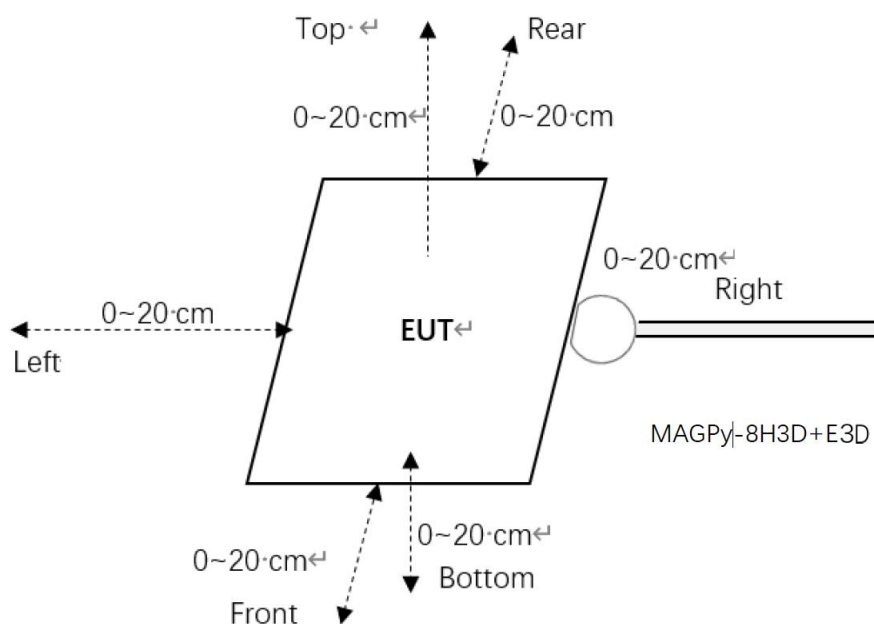5.2 Test setup



Note: tips mode of the test probe is used for 0cm measurement.

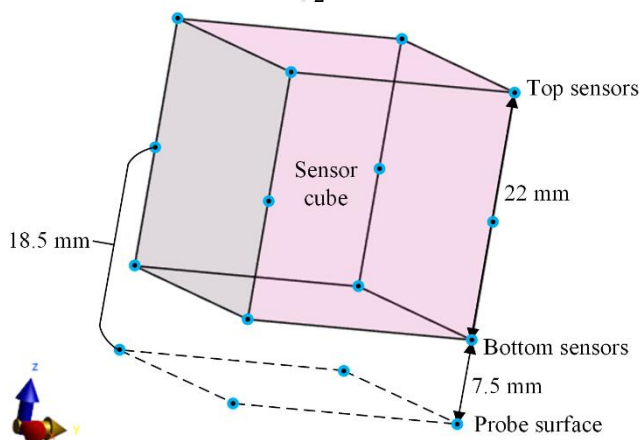
5.3 Test Procedures

H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H-field measured at the top and bottom sensors, H_{top} and H_{bottom} , as well as the normalized H-field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 ci(G_n \Delta d)^i$$



5.4 Information of test equipment

Test equipment: MAGPy-8H3D+E3D	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-field: 0.08-2000 V/m H-field: 0.1-3200 A/m
Probe level response	E-field: ±1dB H-field: ±1dB
linearity error	E-field: ±0.3dB H-field: ±0.3dB
Isotropy	E-field: ±0.8dB H-field: ±0.6dB

5.5 Test results

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.51	1.63	92.64%
Bottom	1.43		
Left	1.31		
Right	1.45		
Front	1.46		
Rear	0.36		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.36	1.63	83.37%
Bottom	1.29		
Left	1.18		
Right	1.31		
Front	1.31		
Rear	0.32		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.22	1.63	75.04%
Bottom	1.16		
Left	1.06		
Right	1.17		
Front	1.18		
Rear	0.29		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.04	1.63	63.78%
Bottom	0.98		
Left	0.90		
Right	1.00		
Front	1.01		
Rear	0.25		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.88	1.63	54.21%
Bottom	0.84		
Left	0.77		
Right	0.85		
Front	0.85		
Rear	0.21		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.71	1.63	43.37%
Bottom	0.67		
Left	0.61		
Right	0.68		
Front	0.68		
Rear	0.17		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.57	1.63	34.70%
Bottom	0.54		
Left	0.49		
Right	0.54		
Front	0.55		
Rear	0.13		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.42	1.63	26.02%
Bottom	0.40		
Left	0.37		
Right	0.41		
Front	0.41		
Rear	0.10		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.30	1.63	18.22%
Bottom	0.28		
Left	0.26		
Right	0.29		
Front	0.29		
Rear	0.07		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.21	1.63	12.75%
Bottom	0.20		
Left	0.18		
Right	0.20		
Front	0.20		
Rear	0.05		

Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.15	1.63	8.93%
Bottom	0.14		
Left	0.13		
Right	0.14		
Front	0.14		
Rear	0.03		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	89.57%
Bottom	0.16		
Left	0.14		
Right	0.81		
Front	0.5		
Rear	1.46		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	80.61%
Bottom	0.14		
Left	0.13		
Right	0.73		
Front	0.45		
Rear	1.31		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	72.55%
Bottom	0.13		
Left	0.11		
Right	0.66		
Front	0.41		
Rear	1.18		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	65.30%
Bottom	0.12		
Left	0.10		
Right	0.59		
Front	0.36		
Rear	1.06		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	55.50%
Bottom	0.10		
Left	0.09		
Right	0.50		
Front	0.31		
Rear	0.90		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	44.40%
Bottom	0.08		
Left	0.07		
Right	0.40		
Front	0.25		
Rear	0.72		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	35.52%
Bottom	0.06		
Left	0.06		
Right	0.32		
Front	0.20		
Rear	0.58		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.01	1.63	28.42%
Bottom	0.05		
Left	0.04		
Right	0.26		
Front	0.16		
Rear	0.46		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.01	1.63	22.73%
Bottom	0.04		
Left	0.04		
Right	0.21		
Front	0.13		
Rear	0.37		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.01	1.63	18.19%
Bottom	0.03		
Left	0.03		
Right	0.16		
Front	0.10		
Rear	0.30		

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.009	1.63	9.09%
Bottom	0.02		
Left	0.01		
Right	0.08		
Front	0.05		
Rear	0.15		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****