



Certificate #4312.01

DFS TEST REPORT

Product Name: Wi-Fi 6 Extender and Access Point**Trade Mark:** GRANDSTREAM**Model No.:** GWN7660EM**Report Number:** 25081819514RFC-3**Test Standards:** FCC 47 CFR Part 15 Subpart E**FCC ID:** YZZGWN7660EM**Test Result:** PASS**Date of Issue:** November 14, 2025

Prepared for:

Grandstream Networks, Inc.**126 Brookline Ave., 3rd Floor Boston, MA 02215, USA**

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.**16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China****TEL: +86-755-2823 0888****FAX: +86-755-2823 0886**

Prepared by:

David Chen

Senior Project Engineer

Reviewed by:

Kevin Liang

Assistant Manager

Approved by:

Billy Ip
Technical Director

Date:

November 14, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Version

Version No.	Date	Description
V1.0	November 14, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

CONTENTS

1. GENERAL INFORMATION	5
1.1 CLIENT INFORMATION	5
1.2 EUT INFORMATION	5
1.2.1 GENERAL DESCRIPTION OF EUT	5
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 DESCRIPTION OF SUPPORT UNITS	7
1.5 TEST LOCATION	7
1.6 TEST FACILITY	7
1.7 DEVIATION FROM STANDARDS	8
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. ENVIRONMENTAL CONDITIONS FOR TESTING	10
5. REQUIREMENTS AND PARAMETERS FOR DFS TEST	10
5.1 REFERENCE DOCUMENTS FOR TESTING	10
5.2 APPLICABILITY OF DFS REQUIREMENTS	11
5.3 DFS DETECTION THRESHOLDS	12
5.4 DFS RESPONSE REQUIREMENT VALUES	13
5.5 SHORT PULSE RADAR TEST WAVEFORMS	14
5.6 LONG PULSE RADAR TEST WAVEFORM	15
5.7 FREQUENCY HOPPING RADAR TEST WAVEFORM	17
6. CALIBRATION SETUP AND DFS TEST RESULTS	18
6.1 CALIBRATION OF RADAR WAVEFORM	18
6.1.1 RADAR WAVEFORM CALIBRATION PROCEDURE	18
6.1.2 CONDUCTED CALIBRATION SETUP	18
6.1.3 CALIBRATION DEVIATION	18
6.1.4 RADAR WAVEFORM CALIBRATION RESULT	19
6.2 U-NII DETECTION BANDWIDTH (7.8.1)	38
6.2.1 LIMIT OF U-NII DETECTION BANDWIDTH	38
6.2.2 TEST PROCEDURES	38
6.2.3 TEST SETUP	38
6.2.4 TEST DEVIATION	38
6.2.5 RESULT OF U-NII DETECTION BANDWIDTH	39
6.3 CHANNEL AVAILABILITY CHECK (7.8.2)	45
6.3.1 LIMIT OF CHANNEL AVAILABILITY CHECK	45
6.3.2 TEST PROCEDURES	45
6.3.3 TEST SETUP	47
6.3.4 TEST DEVIATION	47
6.3.5 RESULT OF CHANNEL AVAILABILITY CHECK TIME	48
6.4 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD (7.8.3)	55
6.4.1 LIMIT OF IN-SERVICE MONITORING	55
6.4.2 TEST PROCEDURES	55
6.4.3 TEST SETUP	56
6.4.4 TEST DEVIATION	56
6.4.5 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	56
6.4.6 DATA TRAFFIC CHANNEL LOADING AND NOISE FLOOR PLOTS	57
6.5 STATISTICAL PERFORMANCE CHECK (7.8.4)	61
6.5.1 LIMIT OF STATISTICAL PERFORMANCE CHECK	61
6.5.2 TEST PROCEDURES	62

6.5.3 TEST SETUP63

6.5.4 TEST DEVIATION63

6.5.5 RESULT OF STATISTICAL PERFORMANCE CHECK64

6.6 BRIDGE AND/OR MESH MODE.....72

6.6.1 LIMIT OF BRIDGE AND/OR MESH MODE72

7. RADAR PARAMETERS.....74

APPENDIX 1 PHOTOS OF TEST SETUP.....74

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....74



1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Wi-Fi 6 Extender and Access Point		
Model No.:	GWN7660EM		
Trade Mark:	GRANDSTREAM		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
		5 850 MHz to 5 895 MHz	IEEE 802.11a/n/ac/ax
Software Version:	1.0.24.4(Provided by the customer)		
Hardware Version:	V1.1(Provided by the customer)		
Sample Received Date:	August 16, 2025		
Sample Tested Date:	August 27, 2025 October 22, 2025		
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

1.2.2 Description of Accessories

None.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)
	5250 MHz to 5350 MHz (U-NII-2A)
	5470 MHz to 5725 MHz (U-NII-2C)
	5725 MHz to 5850 MHz (U-NII-3)
	5850 MHz to 5895 MHz (U-NII-4)
Frequency Ranges:	5180 MHz to 5240 MHz
	5260 MHz to 5320 MHz
	5500 MHz to 5720 MHz
	5745 MHz to 5825 MHz
	5845 MHz to 5885 MHz
Support Standards:	IEEE 802.11a/n/ac/ax
TPC Function:	Support
DFS Operational mode:	Master
Type of Modulation:	IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

	IEEE 802.11ax: OFDM/OFDMA ^{Note1} (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)					
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20: 20 MHz					
	IEEE 802.11n-HT40/ac-VHT40/ax-HE40: 40 MHz					
	IEEE 802.11ac-VHT80/ax-HE80: 80 MHz					
	IEEE 802.11ac-VHT160/ax-HE160: 160 MHz					
Data Rate:	IEEE 802.11a: Up to 54 Mbps					
	IEEE 802.11n: Up to MCS23					
	IEEE 802.11ac-VHT20: Up to MCS8					
	IEEE 802.11ac-VHT40/VHT80/VHT160: Up to MCS9					
	IEEE 802.11ax-HE20/HE40/HE80/HE160: Up to MCS11					
Number of Channels:	5150 MHz to 5350 MHz: 8 for 802.11a/n-HT20/ac-VHT20/ax-HE20 4 for 802.11n-HT40/ac-VHT40/ax-HE40 2 for 802.11ac-VHT80/ax-HE80 1 for 802.11ac-VHT160/ax-HE160					
	5470 MHz to 5725 MHz: 9 for 802.11a/n-HT20/ac-VHT20/ax-HE20 4 for 802.11n-HT40/ac-VHT40/ax-HE40 2 for 802.11ac-VHT80/ax-HE80					
	5725 MHz to 5895 MHz: 8 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 4 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40 2 for IEEE 802.11ac-VHT80/ax-HE80 1 for 802.11ac-VHT160/ax-HE160					
Antenna Type: (Provided by the customer)	Antenna 1:	PIFA Antenna				
	Antenna 2:	PIFA Antenna				
	Antenna 3:	PIFA Antenna				
Antenna Gain (dBi): (Provided by the customer)	Antenna	U-NII-1	U-NII-2 A	U-NII-2 C	U-NII-3	U-NII-4
	Antenna 1:	2.88	2.88	2.88	2.88	2.88
	Antenna 2:	2.88	2.88	2.88	2.88	2.88
	Antenna 3:	2.57	2.57	2.57	2.57	2.57
Note 1: For IEEE 802.11ax, the customer declaration the product supports only the Full RU mode.						

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Key-Press Attenuator	Huaxin	KT2.5-90/1S-2S	UTT-EN023	N/A	UnionTrust
4 Way Divider	WOKEN	0120A04056000 2D	UTT-EN028	N/A	UnionTrust
Wireless Router	SAGEMCOM	RAC2V1S	253703944	VW3FAST5280	UnionTrust
Notebook	Lenovo	B40-80	MP12NEQ6	N/A	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	N/A	UnionTrust
Enterprise Full Touch Handheld Computer	Bluebird Inc.	EF551	S2022120907-Z JC12/12	N/A	UnionTrust
Router	H3C	H3C Magic NX30 Pro	2023AP4524	N/A	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length(Meter)	Supplied by
1	Ethernet Cable	RJ45	1.5 Unshielded without ferrite	UnionTrust
2	Antenna Cable*3	SMA	0.1	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

2. TEST SUMMARY

Test Requirement	Measured				Limit	Result
	5250 MHz to 5350 MHz (U-NII-2A)		5470 MHz to 5725 MHz (U-NII-2C)			
	20 MHz 5260 MHz	40 MHz 5270 MHz	20 MHz 5500 MHz	40 MHz 5510 MHz		
Channel Availability Check Time	> 60 sec	> 60 sec	> 60 sec	> 60 sec	> 60sec	PASS
U-NII Detection Bandwidth	20 MHz	38 MHz	20 MHz	38 MHz	> 100% of the U-NII 99% transmission power bandwidth	PASS
Channel Move Time	Note1	Note1	Note1	Note1	< 10 sec	PASS
Channel Closing Transmission Time	Note1	Note1	Note1	Note1	< 200 ms + aggregate of 60 ms over remaining 10 s period	PASS
Non-Occupancy Period Test	No transmission or Beacons occurred	No transmission or Beacons occurred	No transmission or Beacons occurred	No transmission or Beacons occurred	> 30 minutes	PASS

Remark: Note 1 only require test widest bandwidth

Test Requirement	Measured				Limit	Result
	5250 MHz to 5350 MHz (U-NII-2A)		5470 MHz to 5725 MHz (U-NII-2C)			
	80 MHz 5290 MHz	160 MHz 5250 MHz	80 MHz 5530 MHz	160 MHz 5570 MHz		
Channel Availability Check Time	> 60 sec	> 60 sec	> 60 sec	> 60 sec	> 60sec	PASS
U-NII Detection Bandwidth	78 MHz	157 MHz	79 MHz	156 MHz	> 100% of the U-NII 99% transmission power bandwidth	PASS
Channel Move Time	Note1	0.9646 s	Note1	0.9854 s	< 10 sec	PASS
Channel Closing Transmission Time	Note1	200ms + 11.7 ms	Note1	200ms + 8.4 ms	< 200 ms + aggregate of 60 ms over remaining 10 s period	PASS
Non-Occupancy Period Test	No transmission or Beacons occurred	No transmission or Beacons occurred	No transmission or Beacons occurred	No transmission or Beacons occurred	> 30 minutes	PASS

Remark: Note 1 only require test widest bandwidth

3. EQUIPMENT LIST

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	28-Mar-2025	27-Mar-2026
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	25-Oct-2024	24-Oct-2025
☒	Spectrum Analyzer	R&S	FSV40-N	101653	28-Mar-2025	27-Mar-2026

4. ENVIRONMENTAL CONDITIONS FOR TESTING

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage(V)	Relative Humidity (%)
NT/NV	+15 to +35	120	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

5. REQUIREMENTS AND PARAMETERS FOR DFS TEST

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(\$15.407)
3	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
4	KDB 905462 D04 Test Mode New Rules v01	Operational modes suggested for DFS testing

5.2 APPLICABILITY OF DFS REQUIREMENTS

EUT Operating Mode:

DFS Operational mode	Operating Frequency Range	
	5250 MHz to 5350 MHz	5470 MHz to 5725 MHz
Master	✓	✓

Applicability:

The following table from KDB905462 and the lists of the applicable requirements for the DFS testing.

Table 1 – Applicability of DFS Requirements Prior to Use of a Channel:

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2 – Applicability of DFS requirements during normal operation:

Requirement	Operational Mode		
	Master Device or	Client Without Radar Detection	Client with Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes
Additional requirements for devices with multiple bandwidth modes	Operational Mode		
	Master Device or Client with Radar Detection	Client Without Radar Detection	
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required	
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link	
All other tests	Any single BW mode	Not required	
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.			

5.3 DFS DETECTION THRESHOLDS

Table 3 – DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection:

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 mw	-64 dBm
EIRP < 200 mw and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 mw that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

The radar Detection Threshold, lowest antenna gain is the parameter of Interference radar DFS detection threshold, The Interference Detection Threshold is -64 dBm

5.4 DFS RESPONSE REQUIREMENT VALUES

Table 4 – DFS Radar Signal Parameter Values:

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1.)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and 2.)
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3.)
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

5.5 SHORT PULSE RADAR TEST WAVEFORMS

DFS Radar Signal Parameter:

Radar Type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1.	See Note 1.
1	1	Test A Test B	Roundup $\left\{ \left(\frac{1}{360} \right) \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4

5.6 LONG PULSE RADAR TEST WAVEFORM

Long Pulse Radar Test Waveform


Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as follows:

- (1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- (2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- (3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- (4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- (5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- (6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- (7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- (1) The total test signal length is 12 seconds.
- (2) 8 Bursts are randomly generated for the Burst_Count.
- (3) Burst 1 has 2 randomly generated pulses.
- (4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- (5) The PRI is randomly selected to be at 1213 microseconds.
- (6) Bursts 2 through 8 are generated using steps 3 – 5.
- (7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

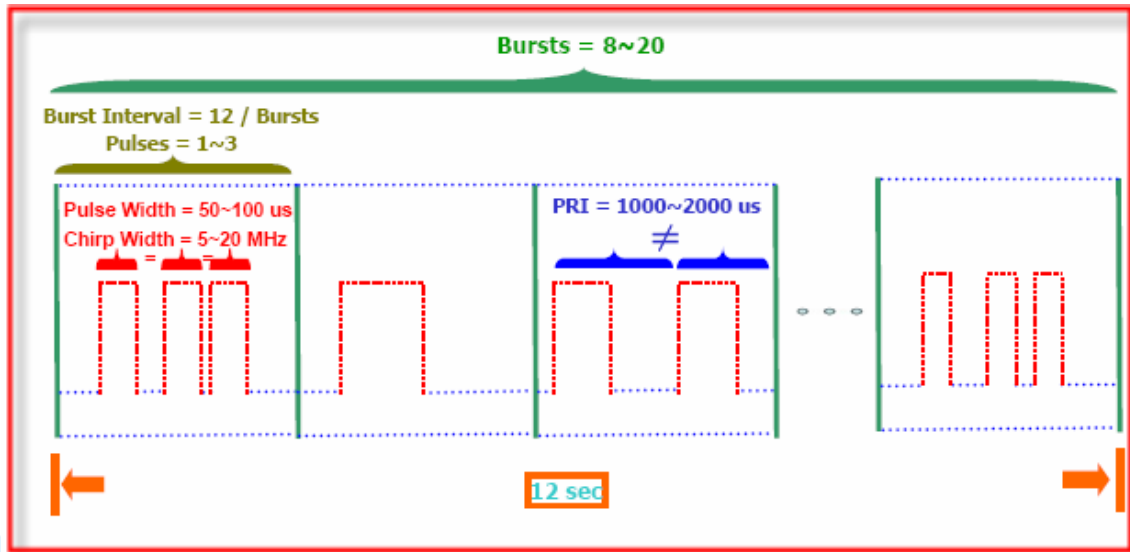


5.7 FREQUENCY HOPPING RADAR TEST WAVEFORM

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:
The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

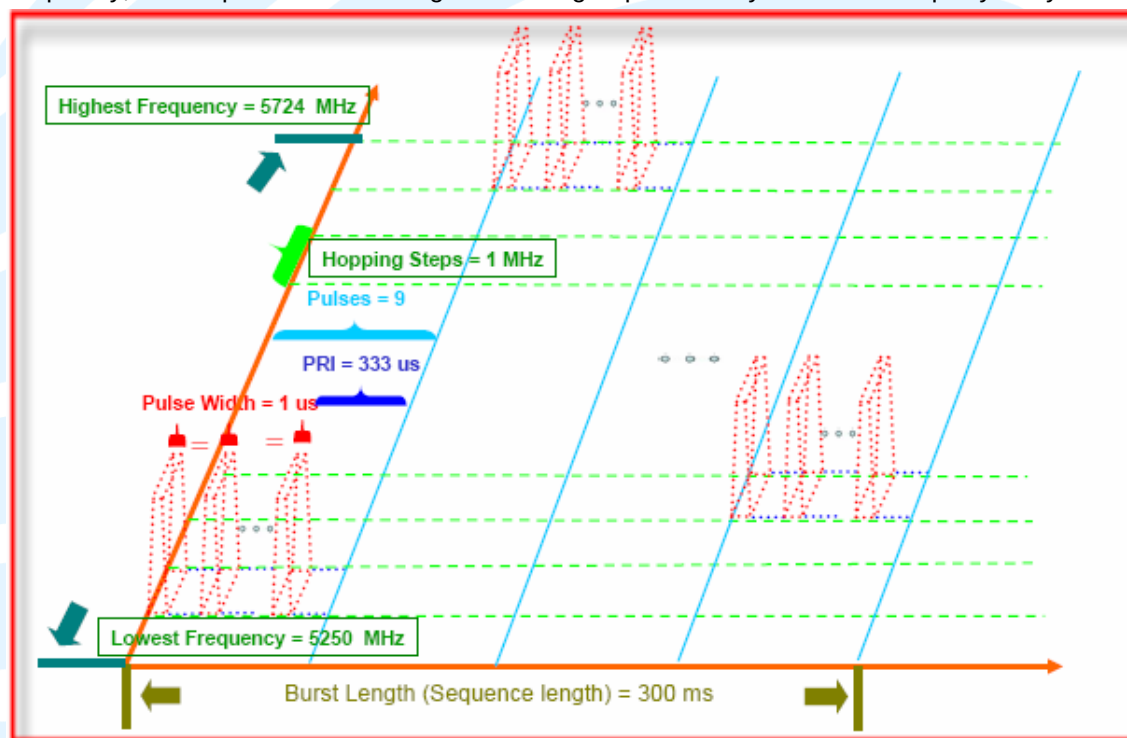


6. CALIBRATION SETUP AND DFS TEST RESULTS

6.1 CALIBRATION OF RADAR WAVEFORM

6.1.1 Radar Waveform Calibration Procedure

The Interference Radar Detection Threshold Level is -64 dBm that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0~6. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz to measure the radar waveform. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was -64 dBm. Capture the spectrum analyzer plots on radar waveform.

6.1.2 Conducted Calibration Setup

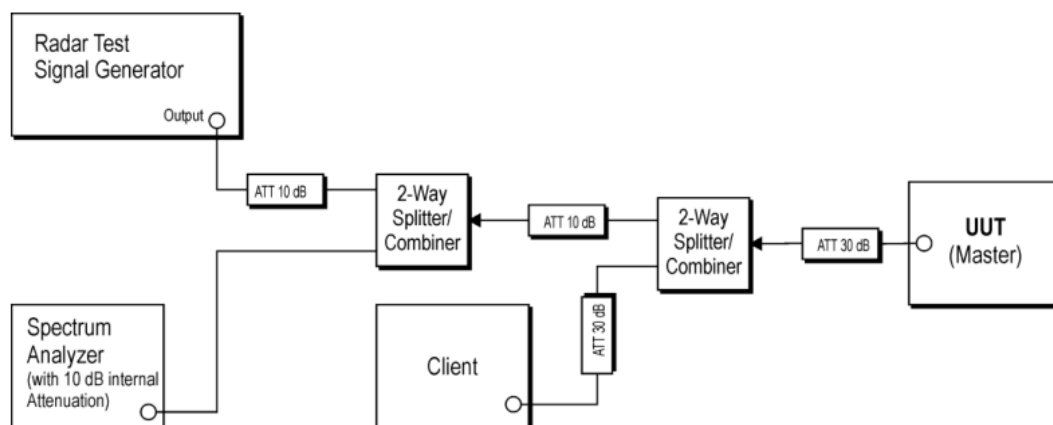


6.1.3 Calibration Deviation

There is no deviation with the original standard.

6.1.4 Radar Waveform Calibration Result

Test Mode	Frequency [MHz]	Radar Type	Result	Limit [dbm]	Verdict
11AX20SISO	5260	Type0	-61.25	-61.12	PASS
11AX20SISO	5260	Type1	-61.31	-61.12	PASS
11AX20SISO	5260	Type2	-61.18	-61.12	PASS
11AX20SISO	5260	Type3	-61.37	-61.12	PASS
11AX20SISO	5260	Type4	-61.37	-61.12	PASS
11AX20SISO	5260	Type5	-61.45	-61.12	PASS
11AX20SISO	5260	Type6	-61.32	-61.12	PASS
11AX20SISO	5500	Type0	-61.48	-61.12	PASS
11AX20SISO	5500	Type1	-61.53	-61.12	PASS
11AX20SISO	5500	Type2	-61.40	-61.12	PASS
11AX20SISO	5500	Type3	-61.43	-61.12	PASS
11AX20SISO	5500	Type4	-61.56	-61.12	PASS
11AX20SISO	5500	Type5	-61.44	-61.12	PASS
11AX20SISO	5500	Type6	-61.36	-61.12	PASS
11AX40SISO	5270	Type0	-61.31	-61.12	PASS
11AX40SISO	5270	Type1	-61.24	-61.12	PASS
11AX40SISO	5270	Type2	-61.31	-61.12	PASS
11AX40SISO	5270	Type3	-61.47	-61.12	PASS
11AX40SISO	5270	Type4	-61.29	-61.12	PASS
11AX40SISO	5270	Type5	-61.20	-61.12	PASS
11AX40SISO	5270	Type6	-61.35	-61.12	PASS
11AX160SISO	5250	Type0	-61.14	-61.12	PASS
11AX160SISO	5250	Type1	-61.26	-61.12	PASS
11AX160SISO	5250	Type2	-61.33	-61.12	PASS
11AX160SISO	5250	Type3	-61.37	-61.12	PASS
11AX160SISO	5250	Type4	-61.22	-61.12	PASS
11AX160SISO	5250	Type5	-61.27	-61.12	PASS
11AX160SISO	5250	Type6	-61.33	-61.12	PASS
11AX160SISO	5570	Type0	-59.46	-59.12	PASS
11AX160SISO	5570	Type1	-59.15	-59.12	PASS
11AX160SISO	5570	Type2	-59.22	-59.12	PASS
11AX160SISO	5570	Type3	-59.36	-59.12	PASS
11AX160SISO	5570	Type4	-59.19	-59.12	PASS
11AX160SISO	5570	Type5	-59.27	-59.12	PASS
11AX160SISO	5570	Type6	-59.44	-59.12	PASS

Test Graphs

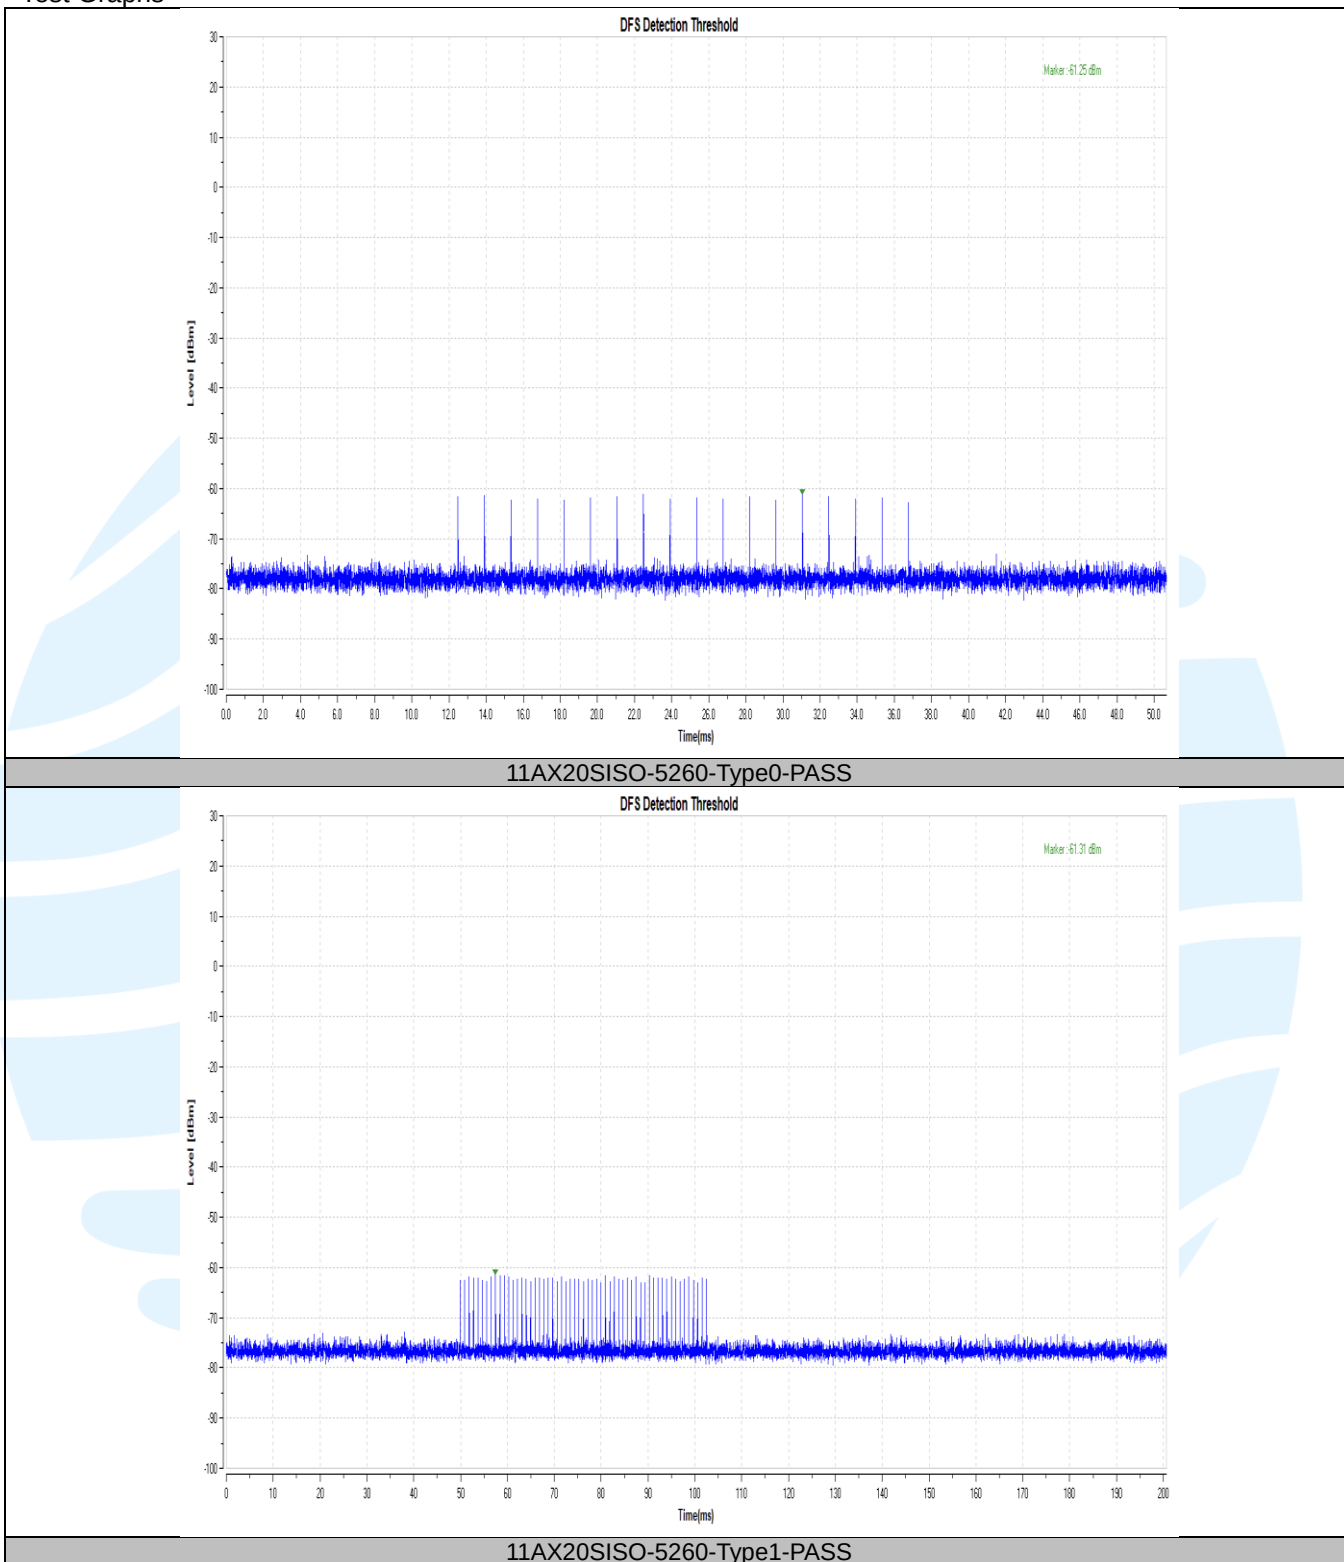
Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

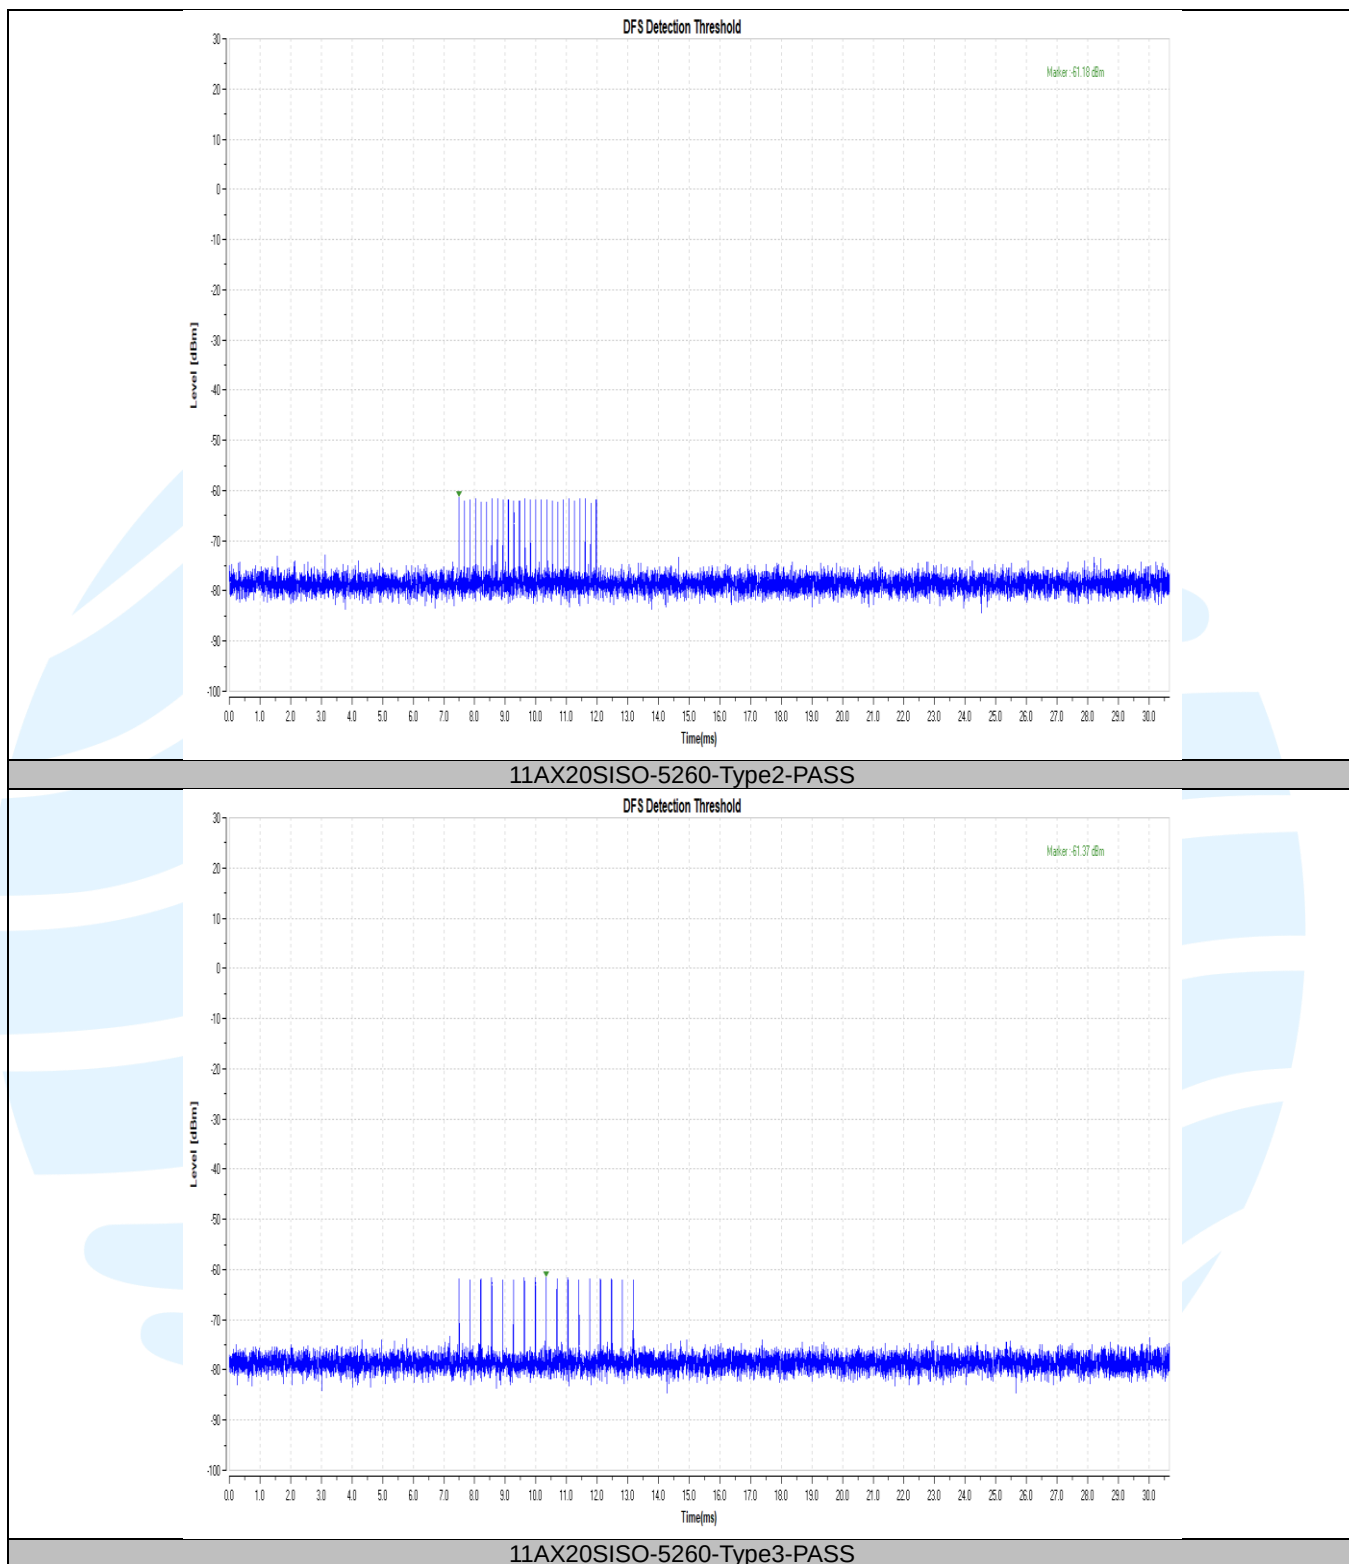

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

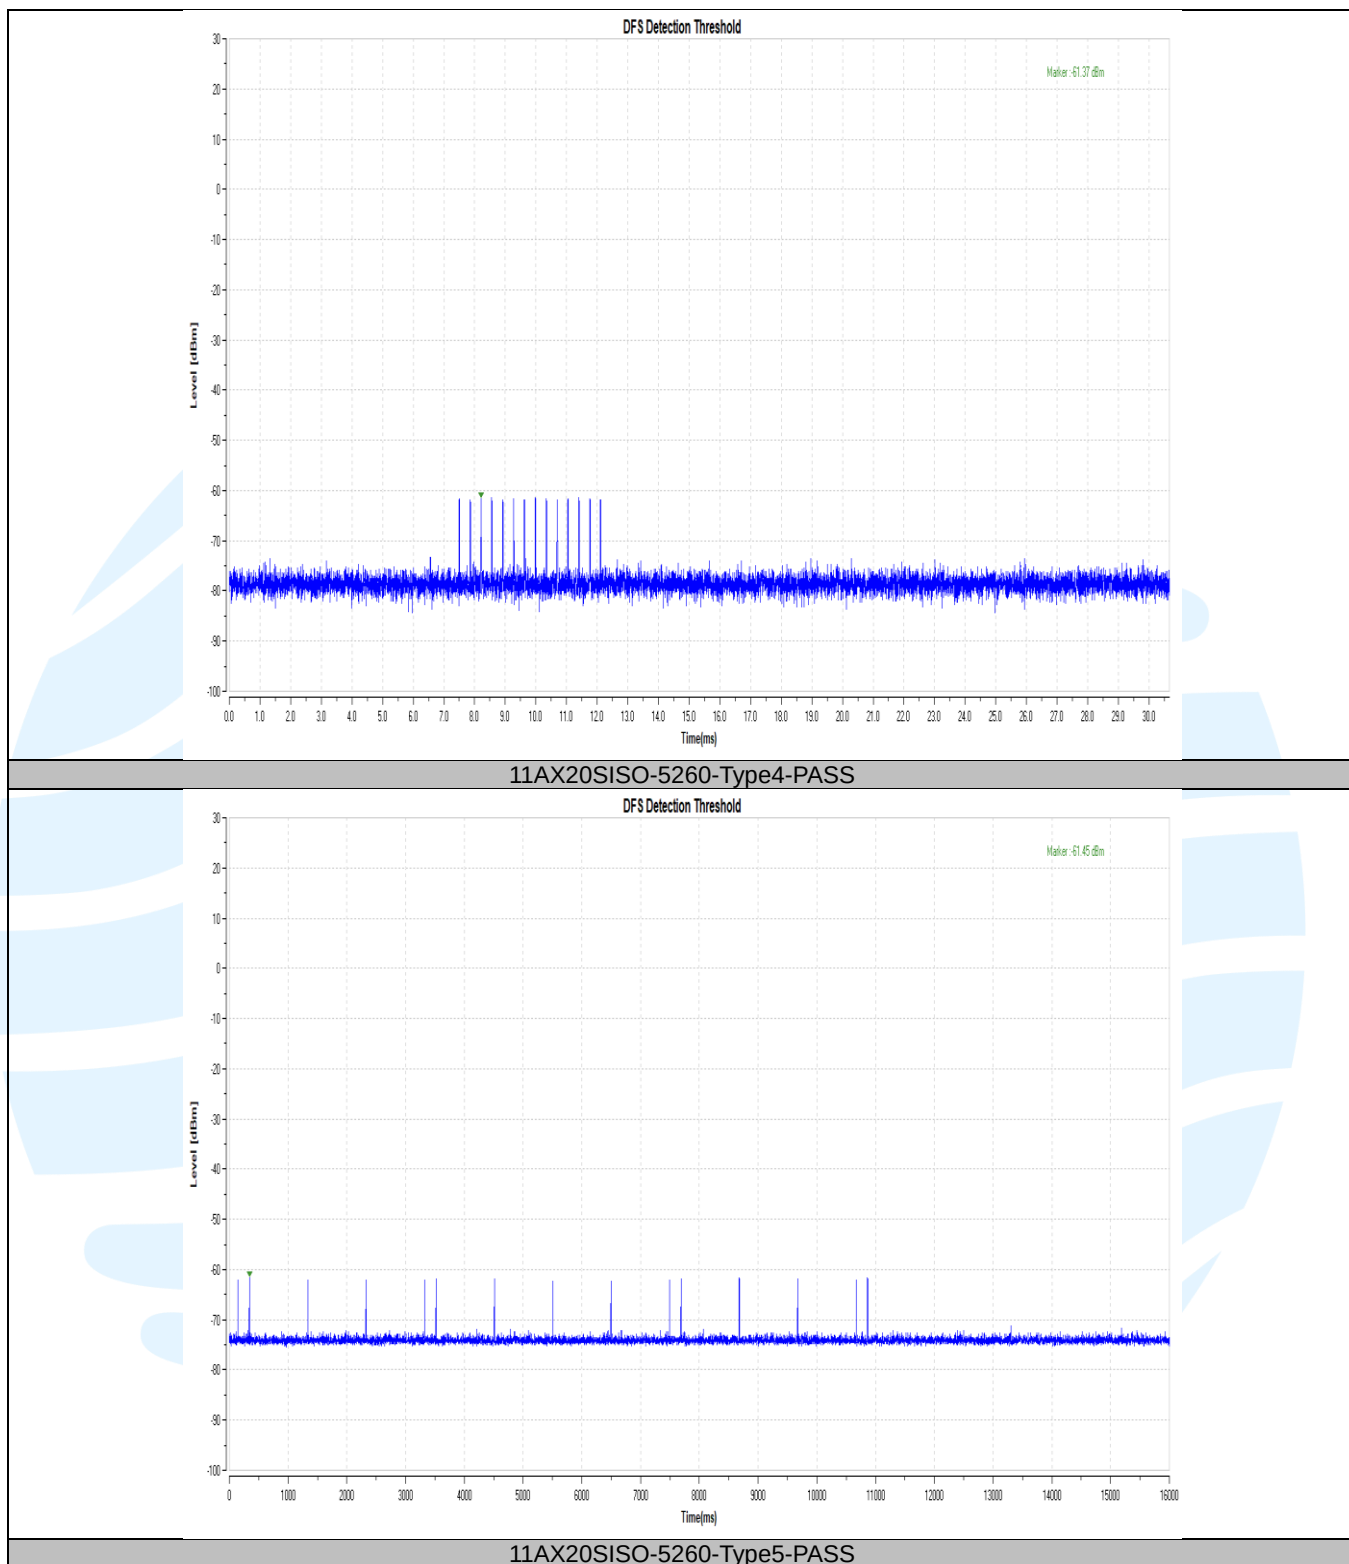

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

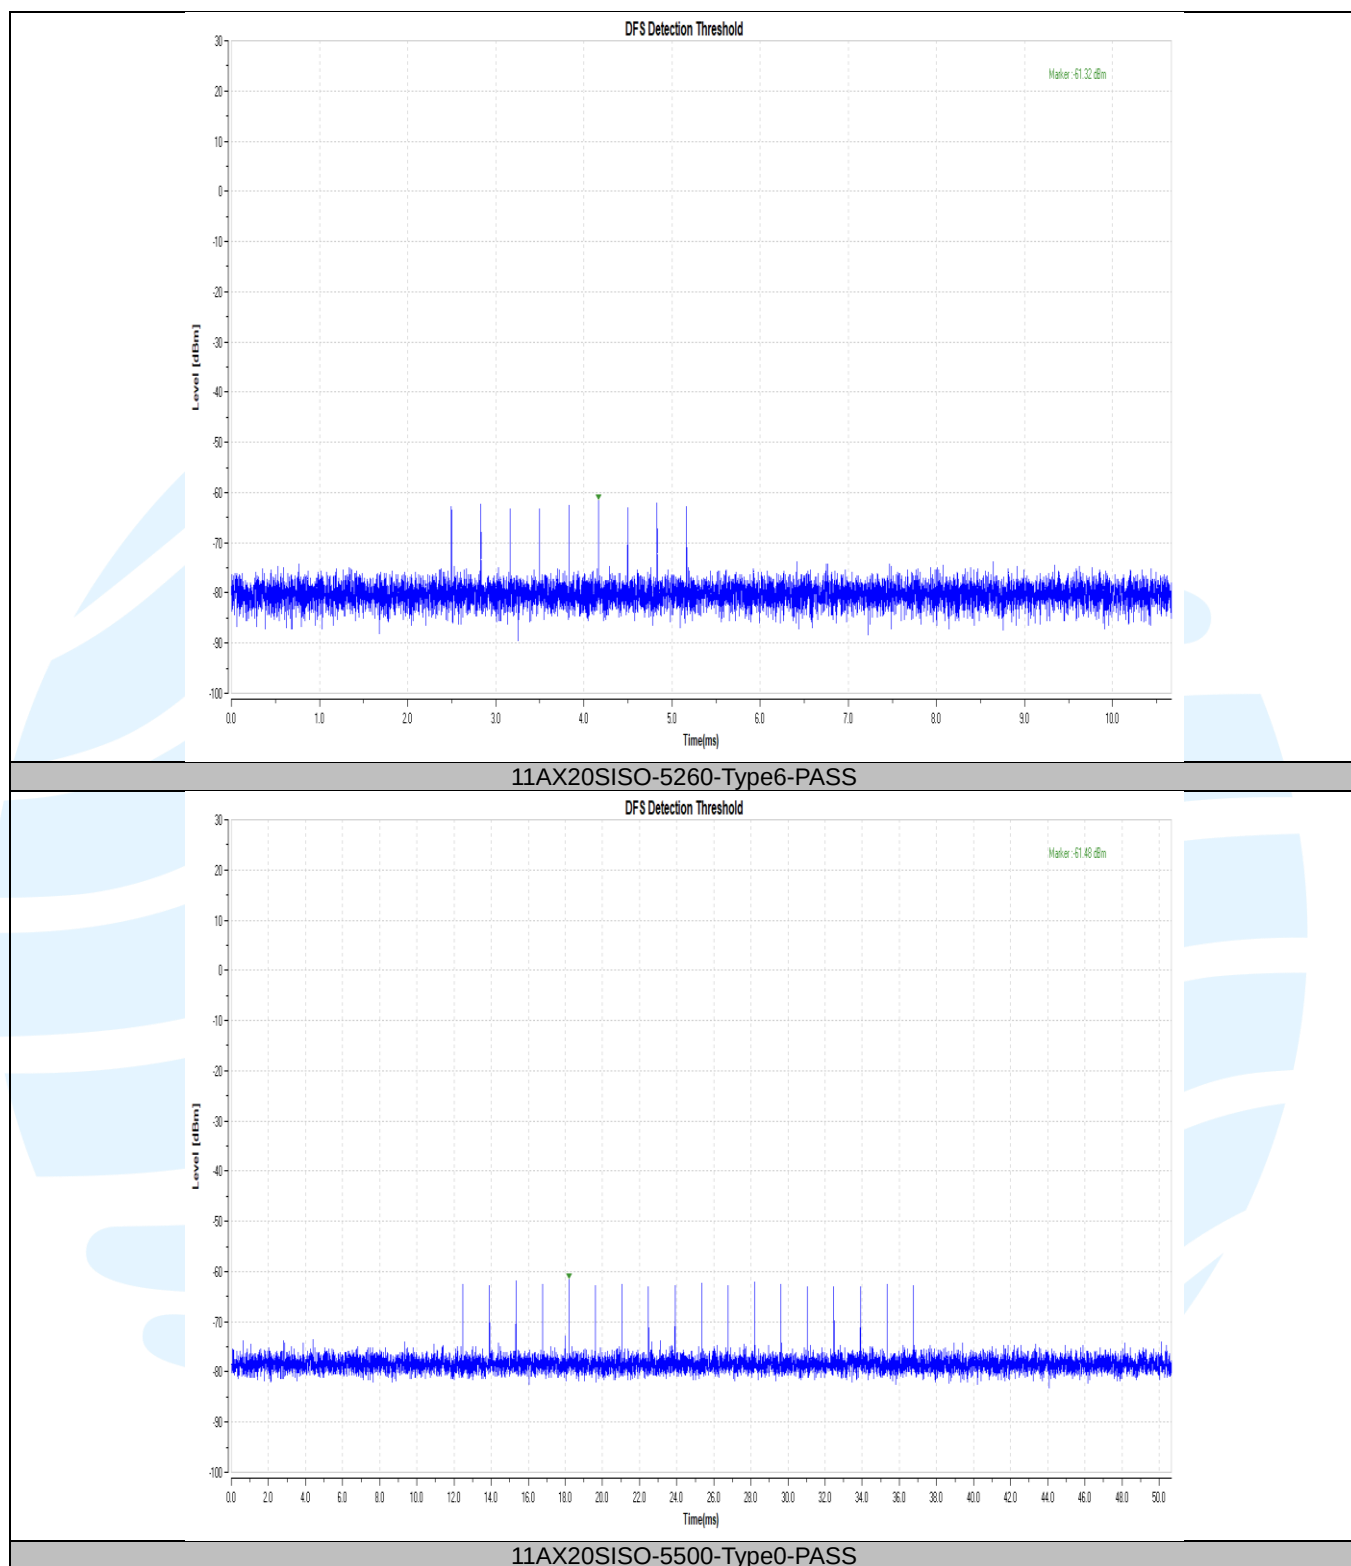

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

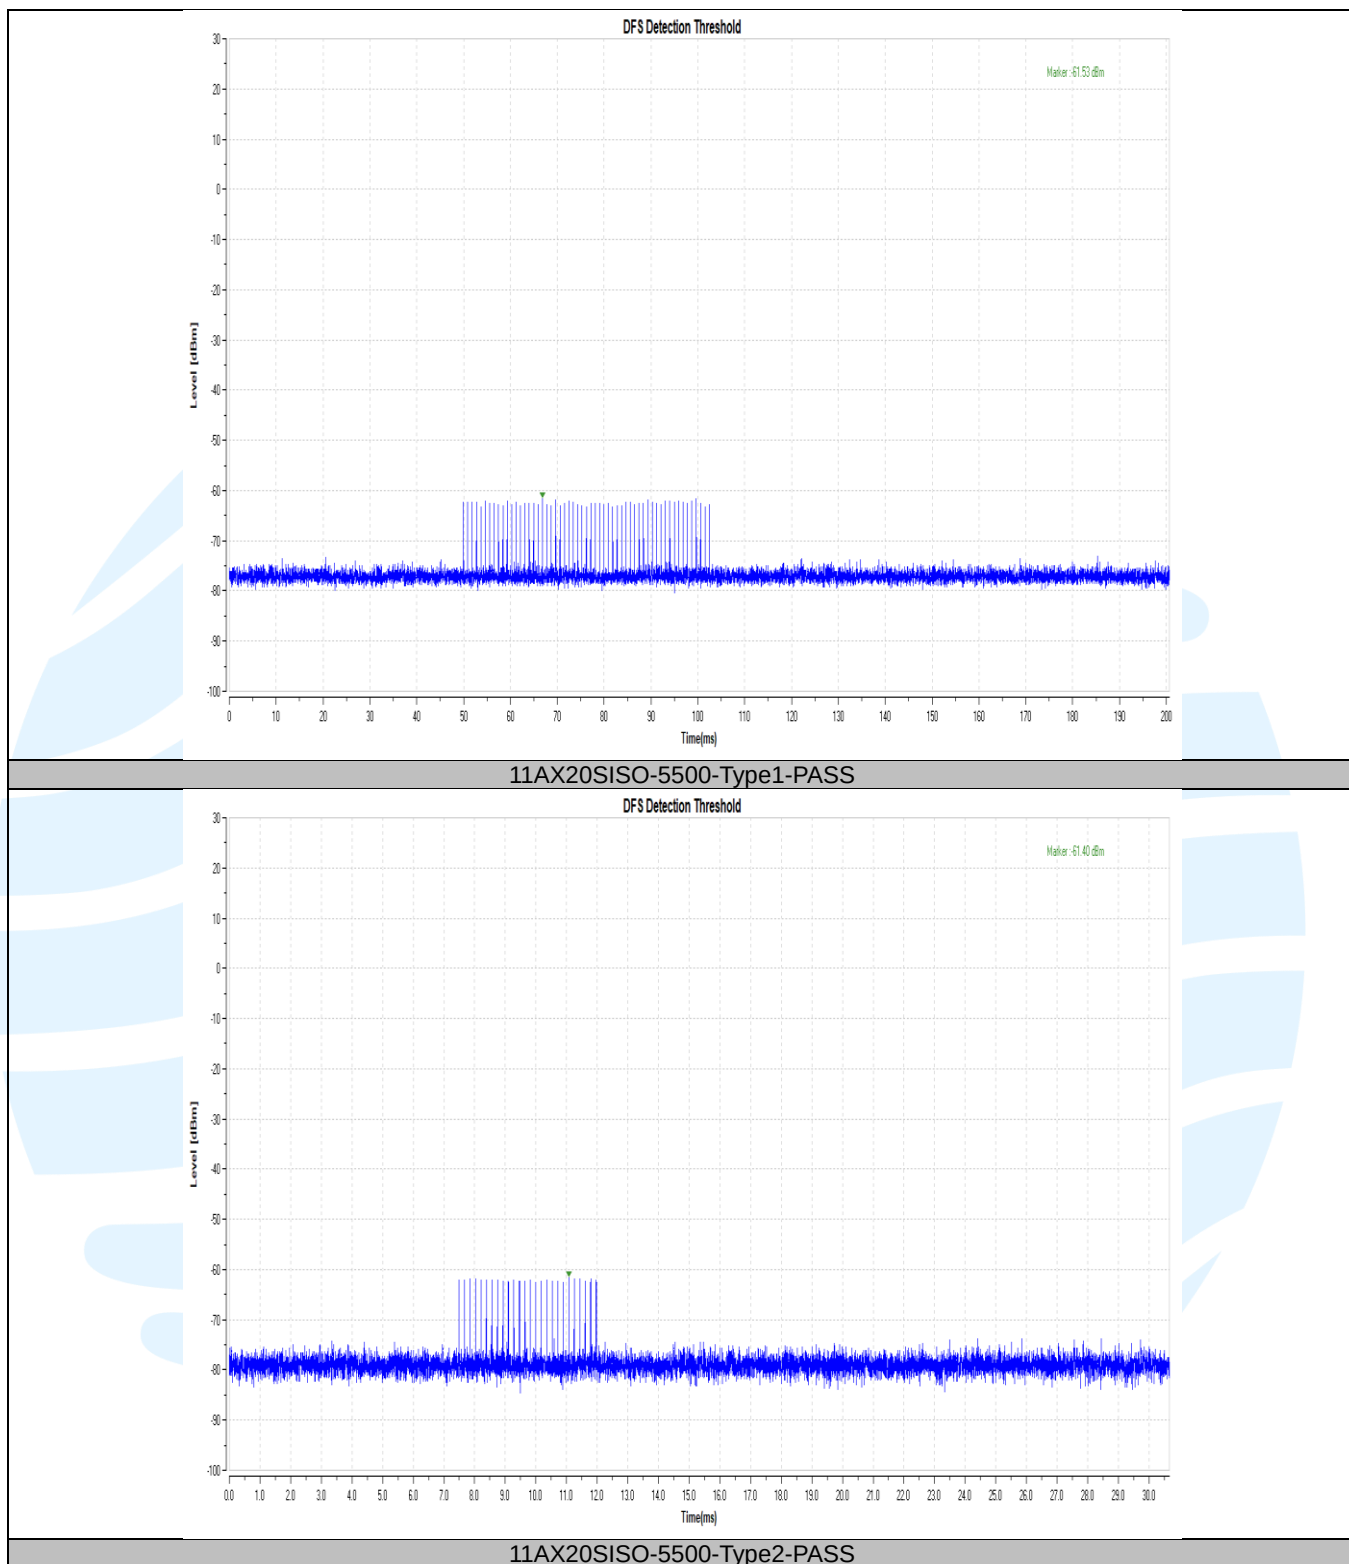

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

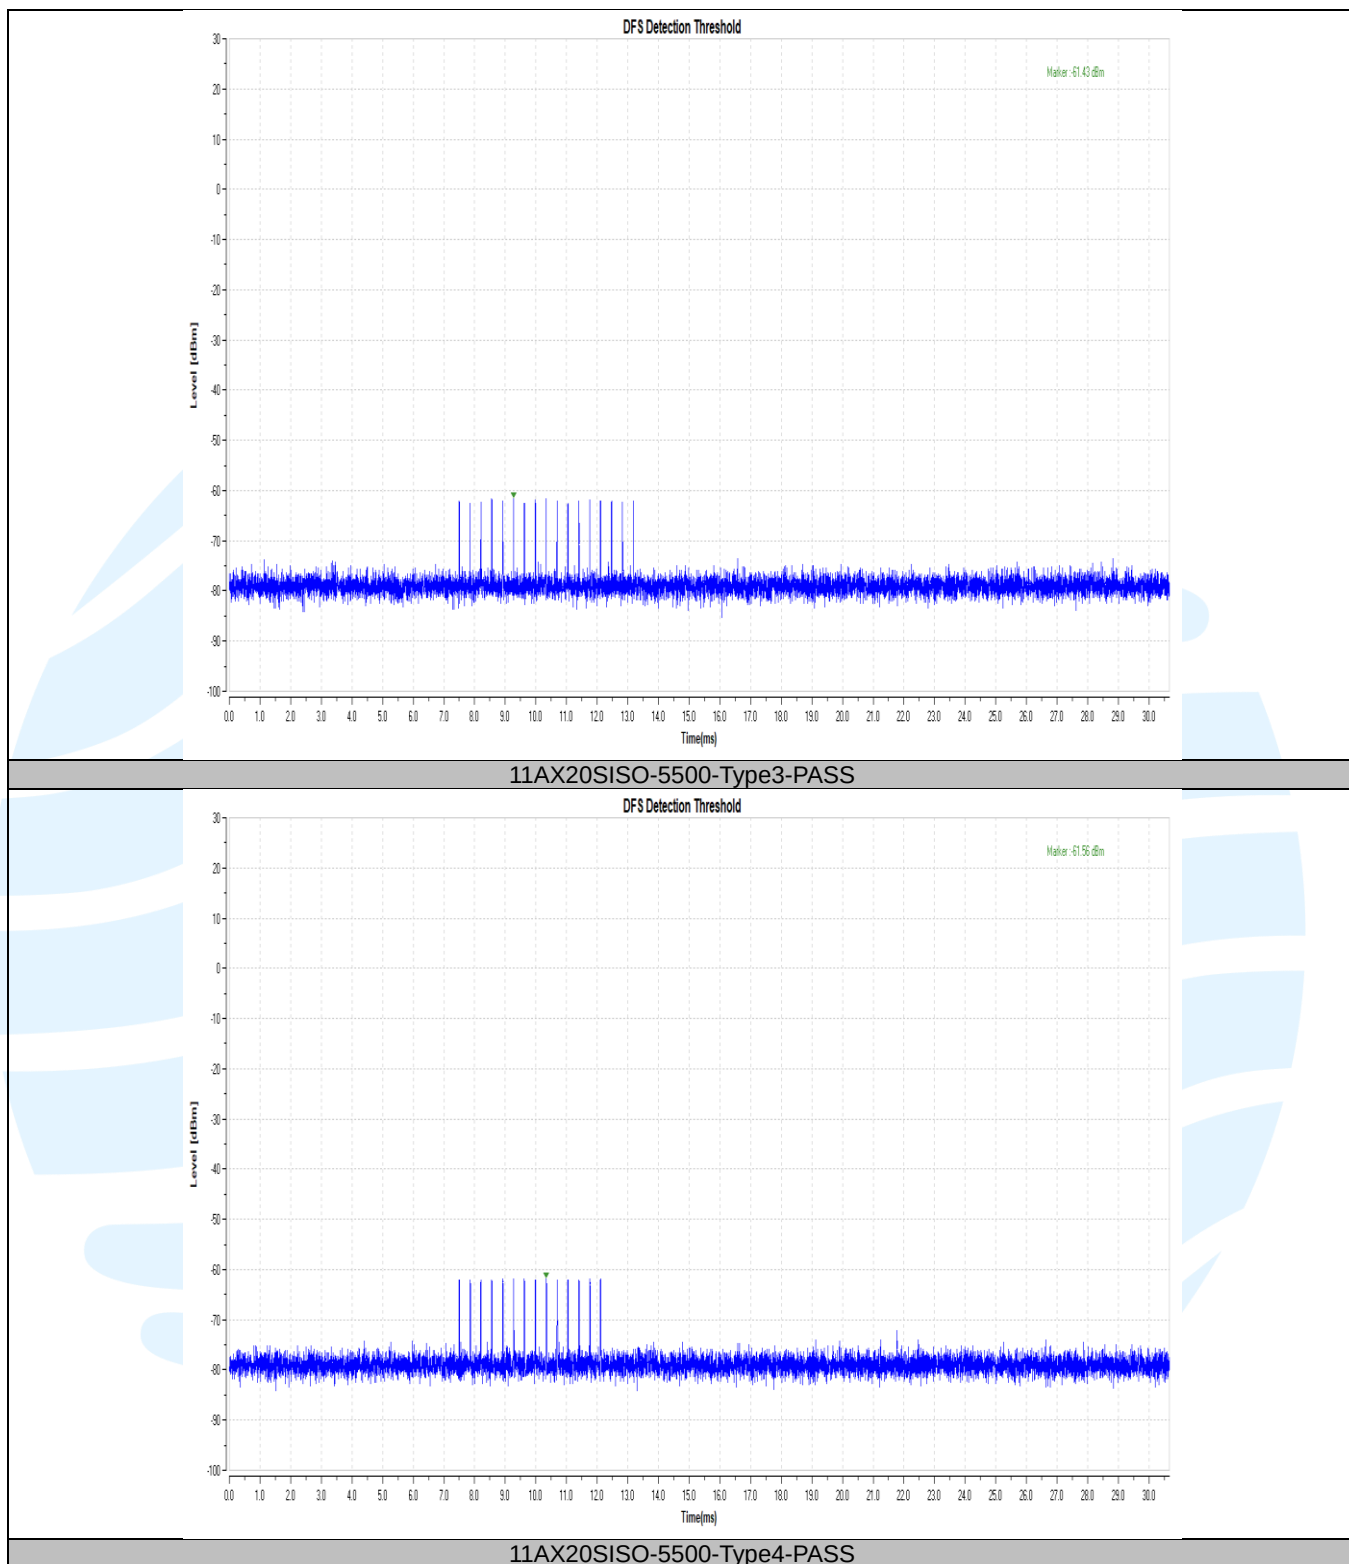

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

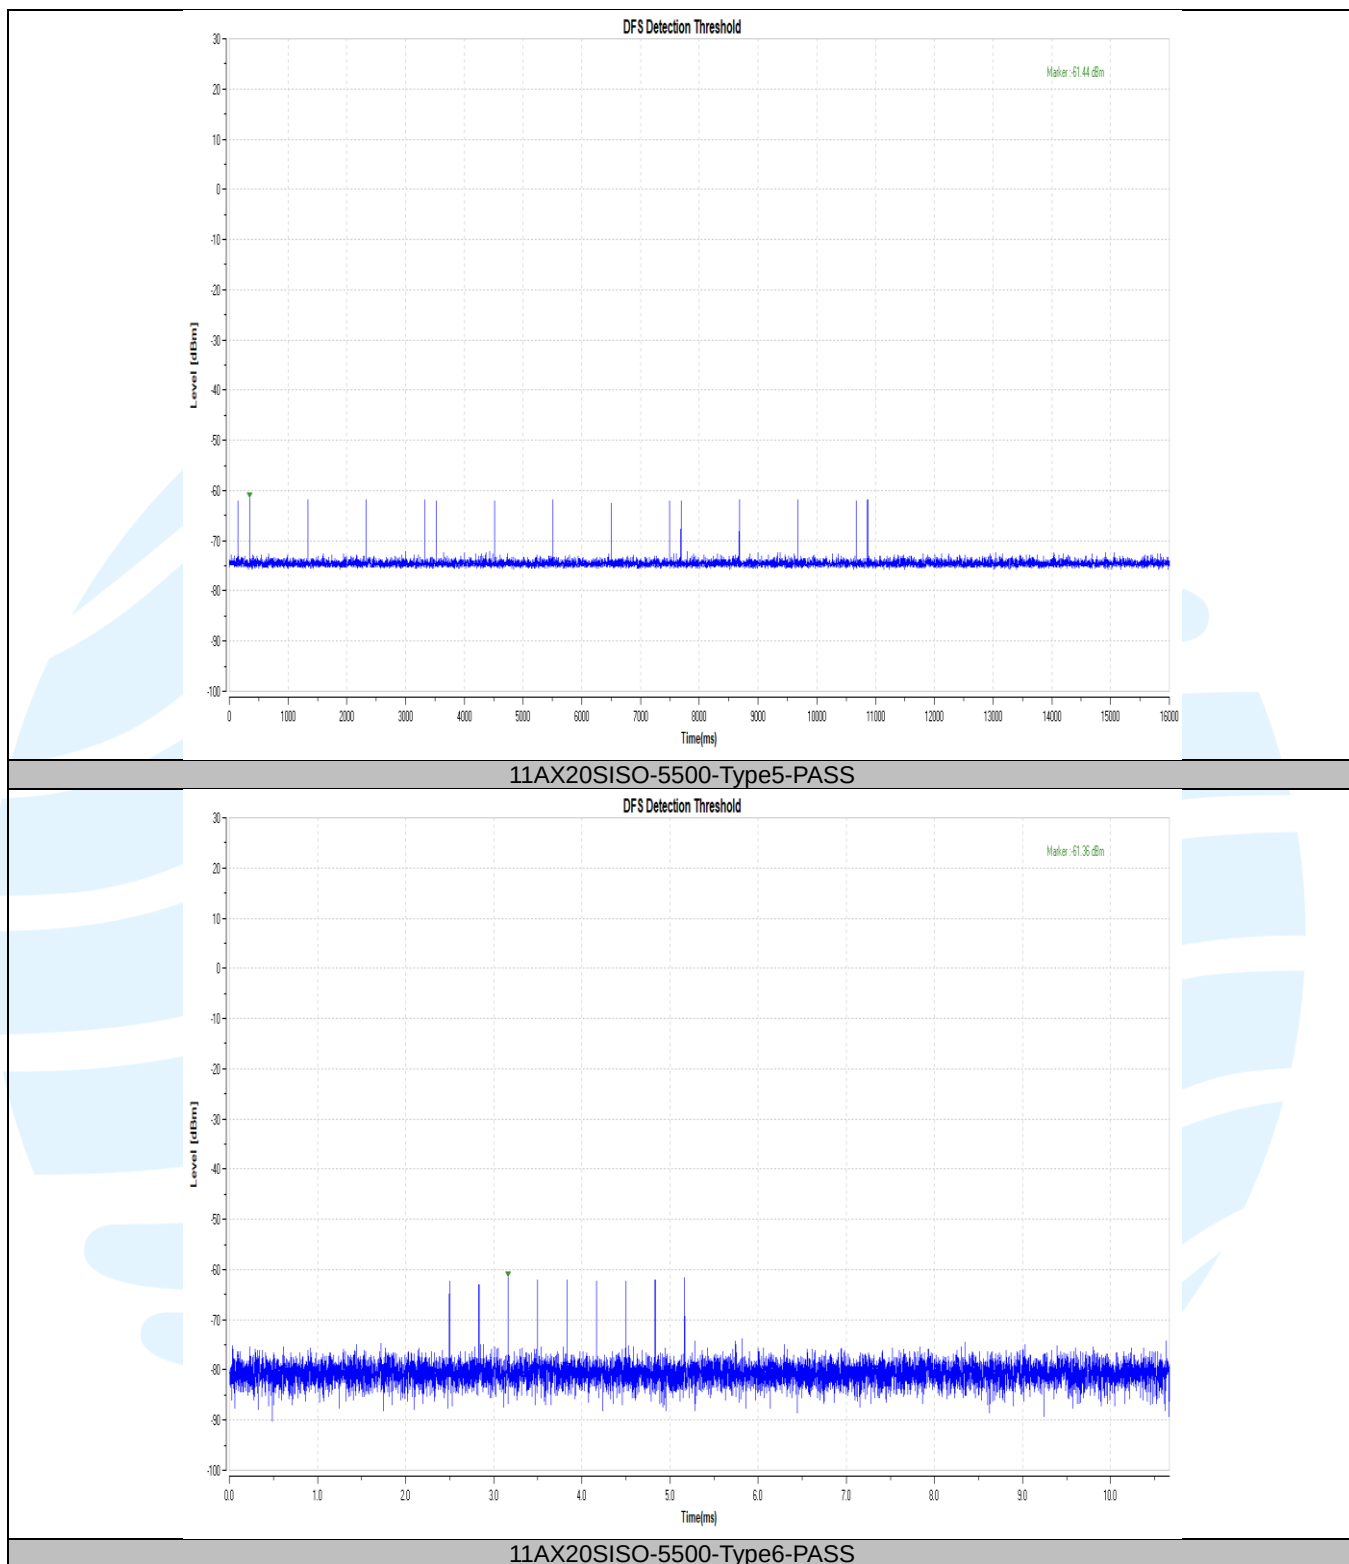

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

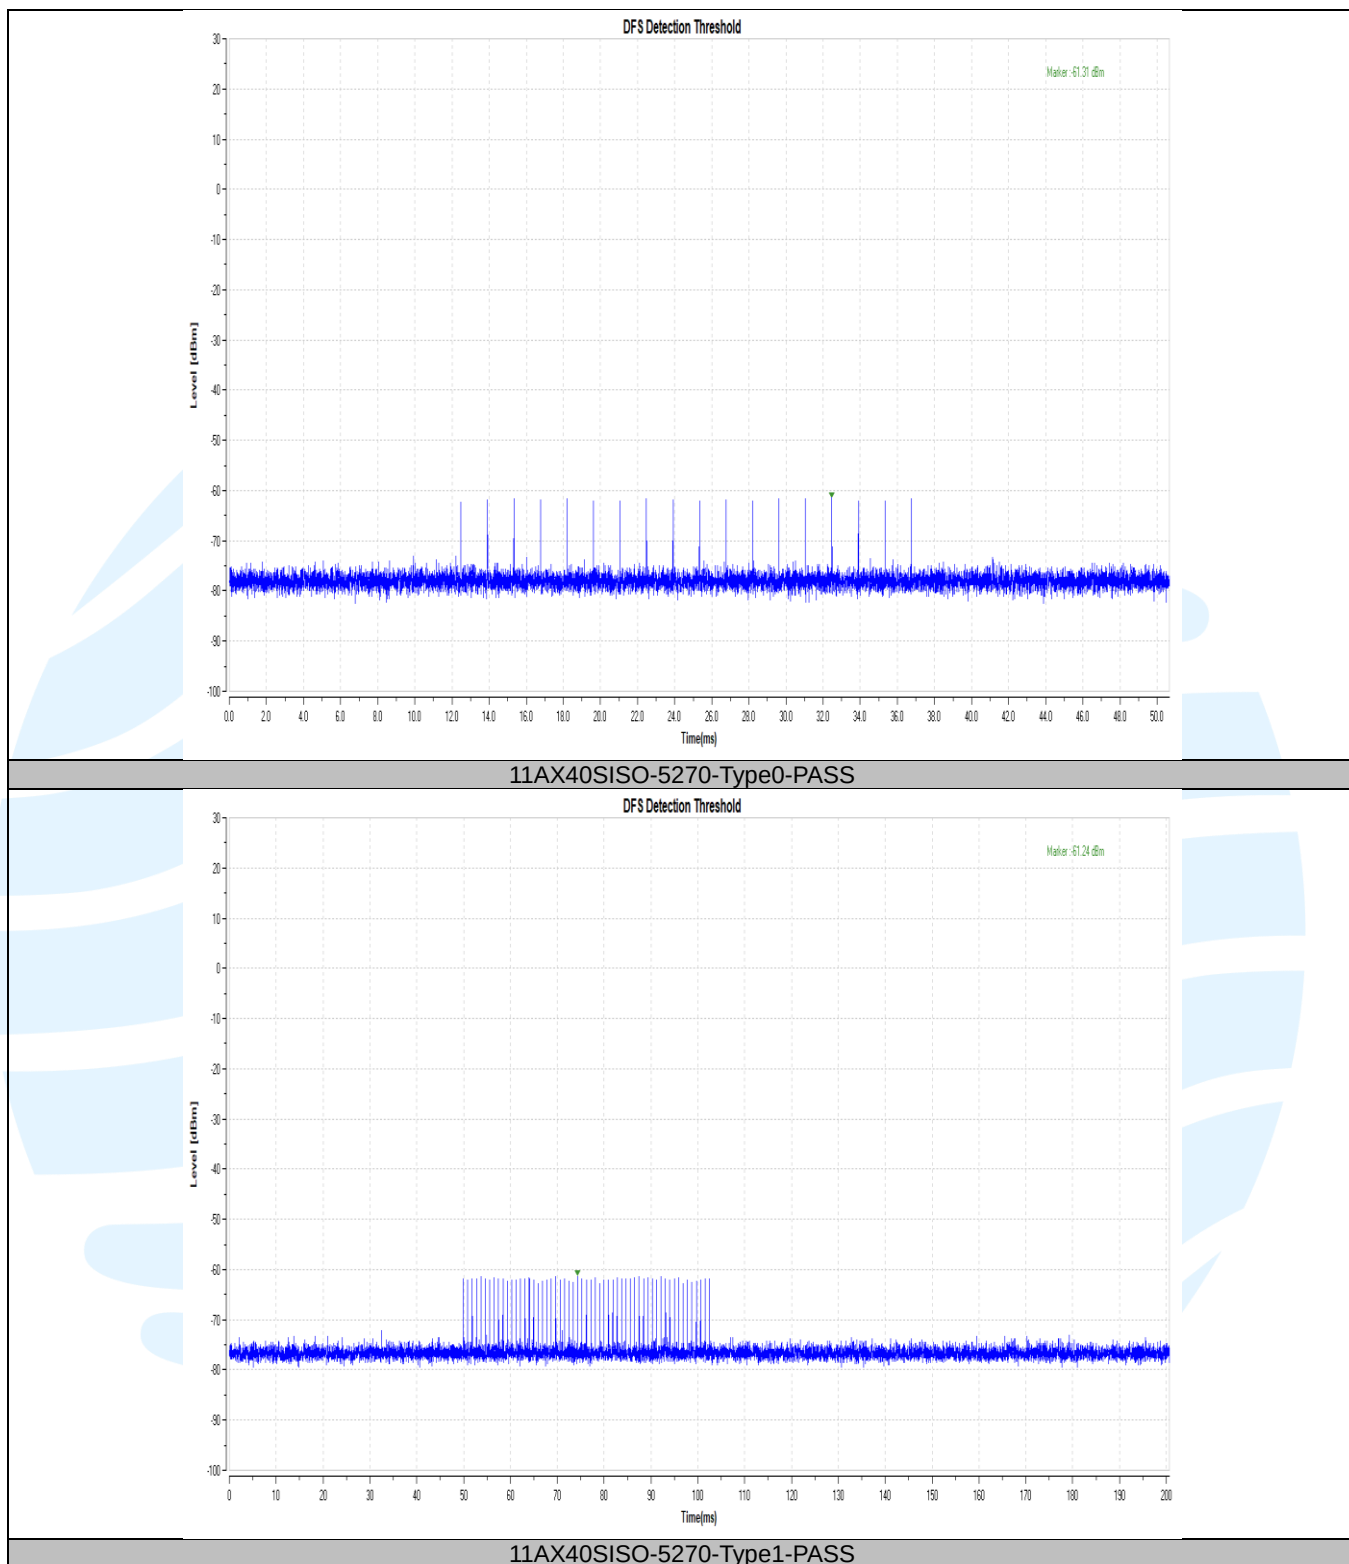

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

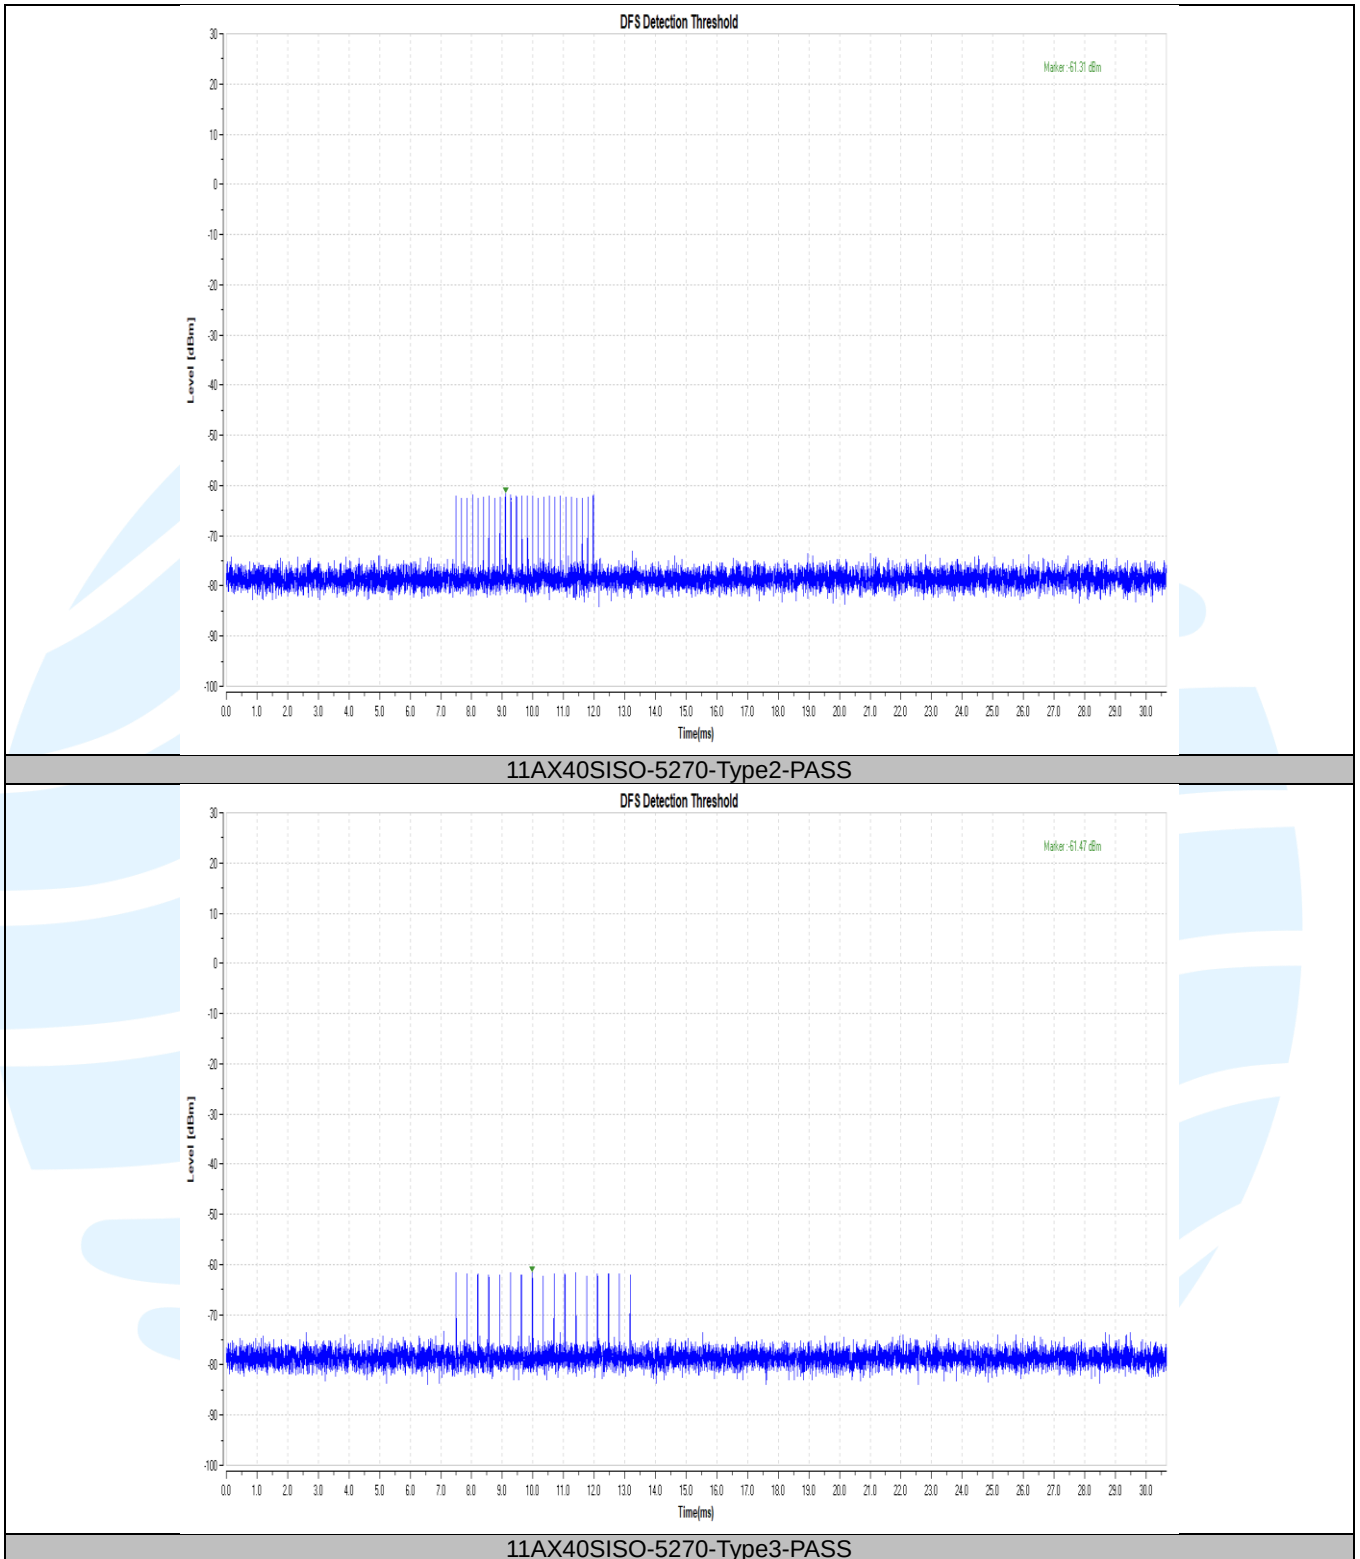

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

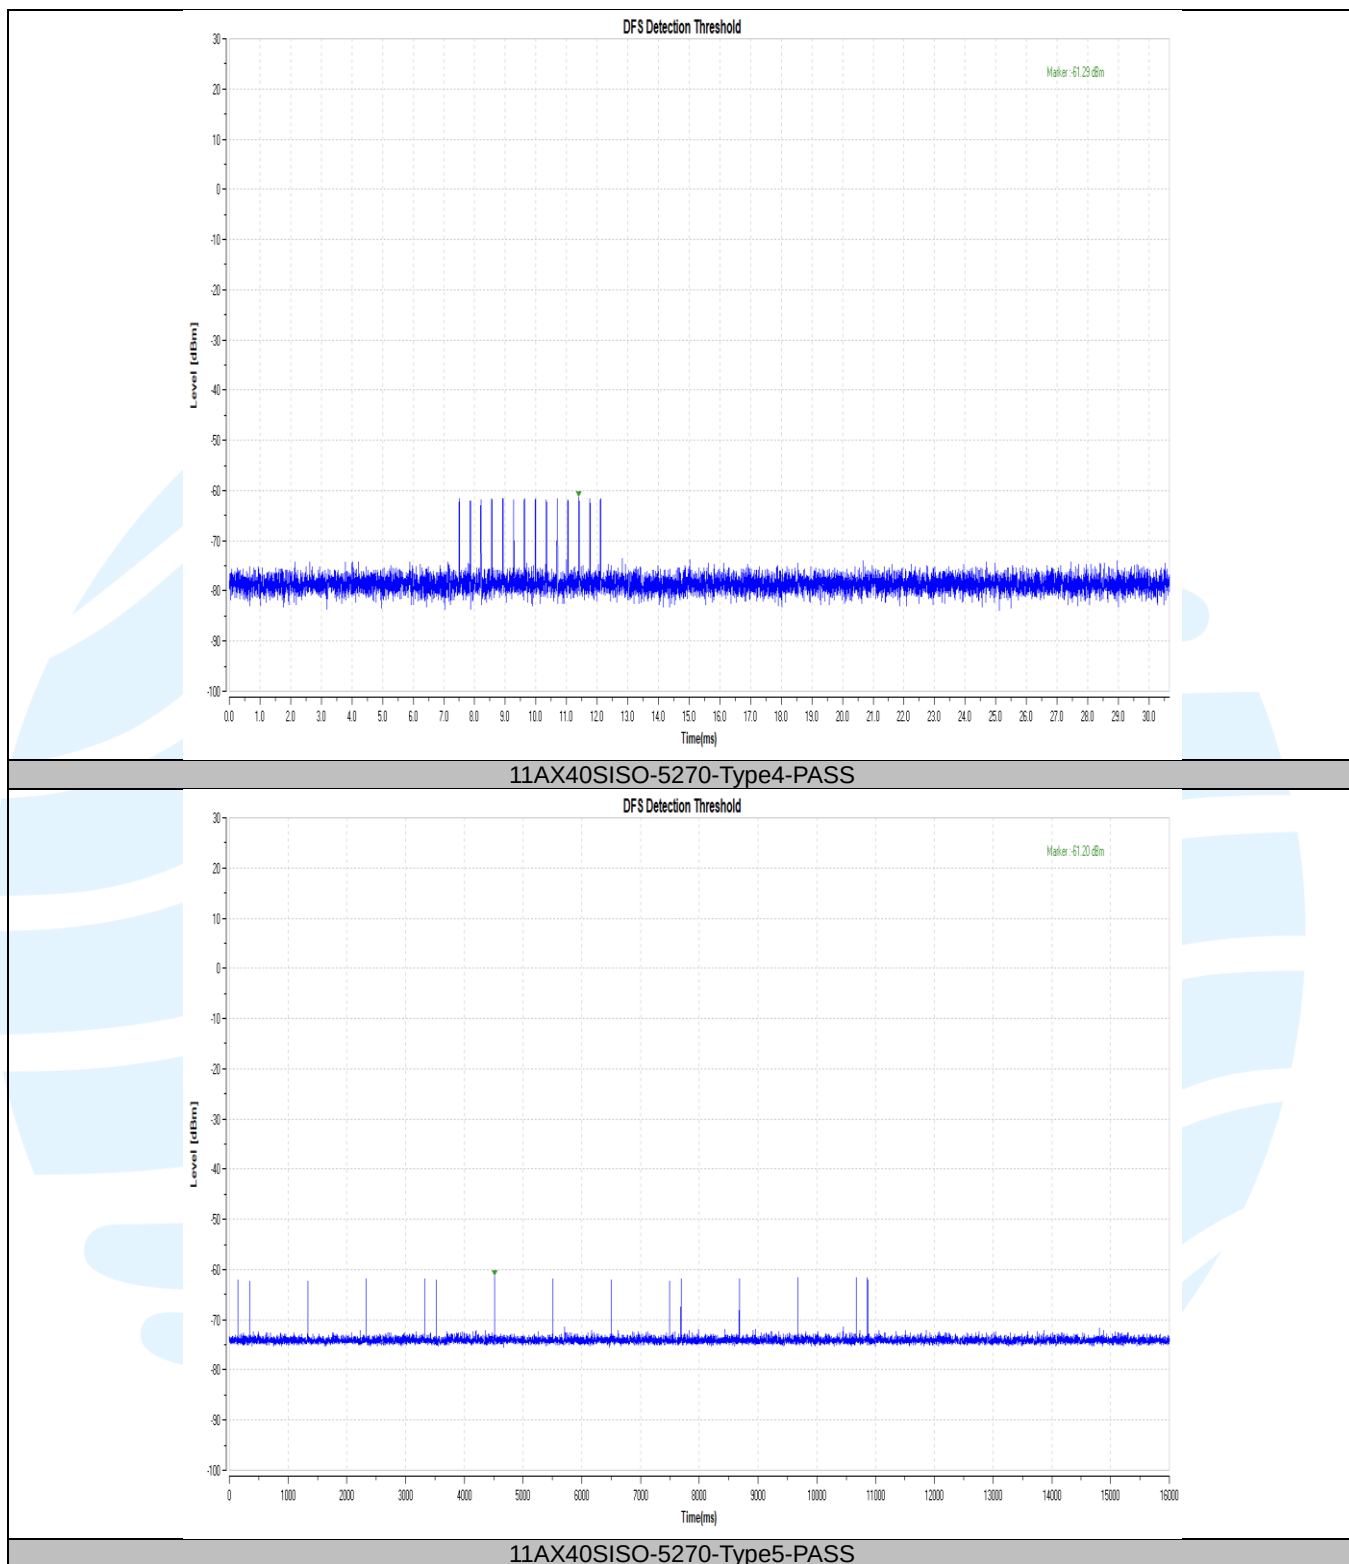

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

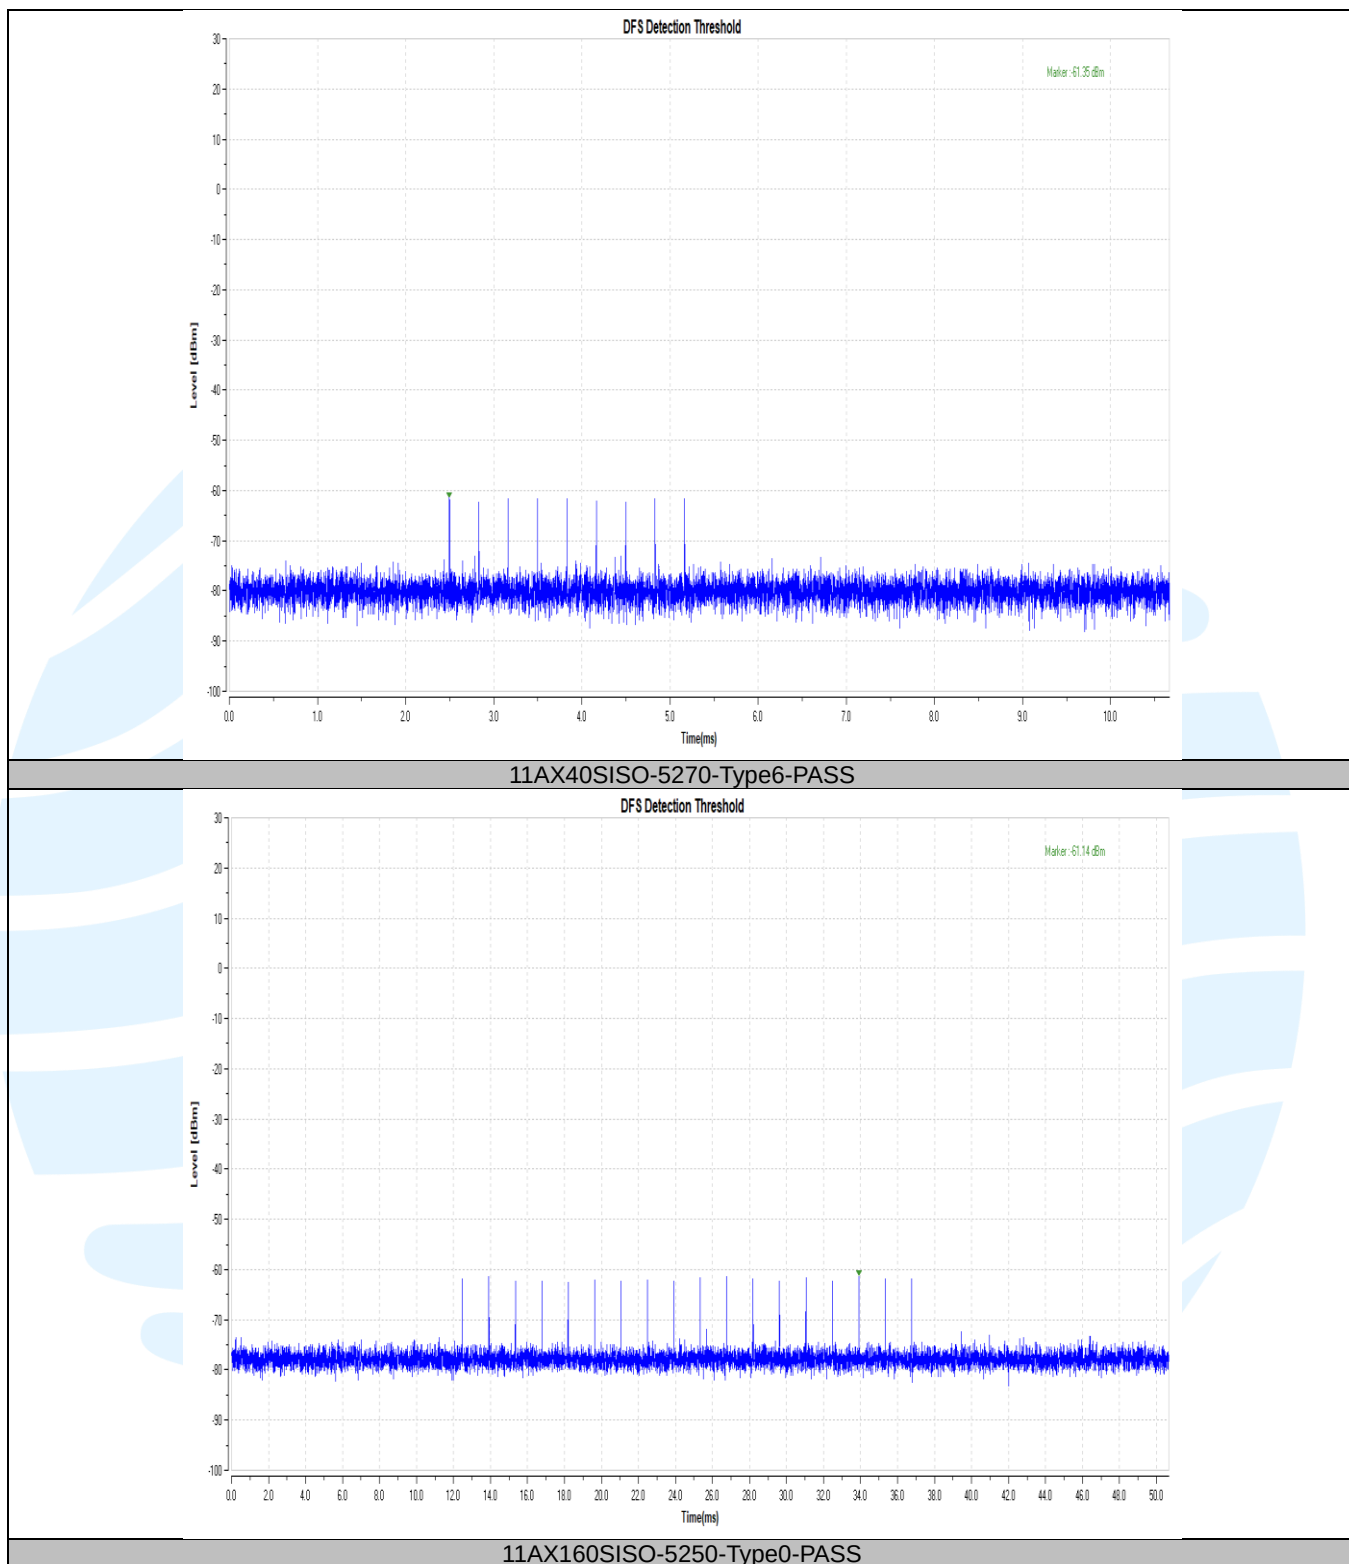

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

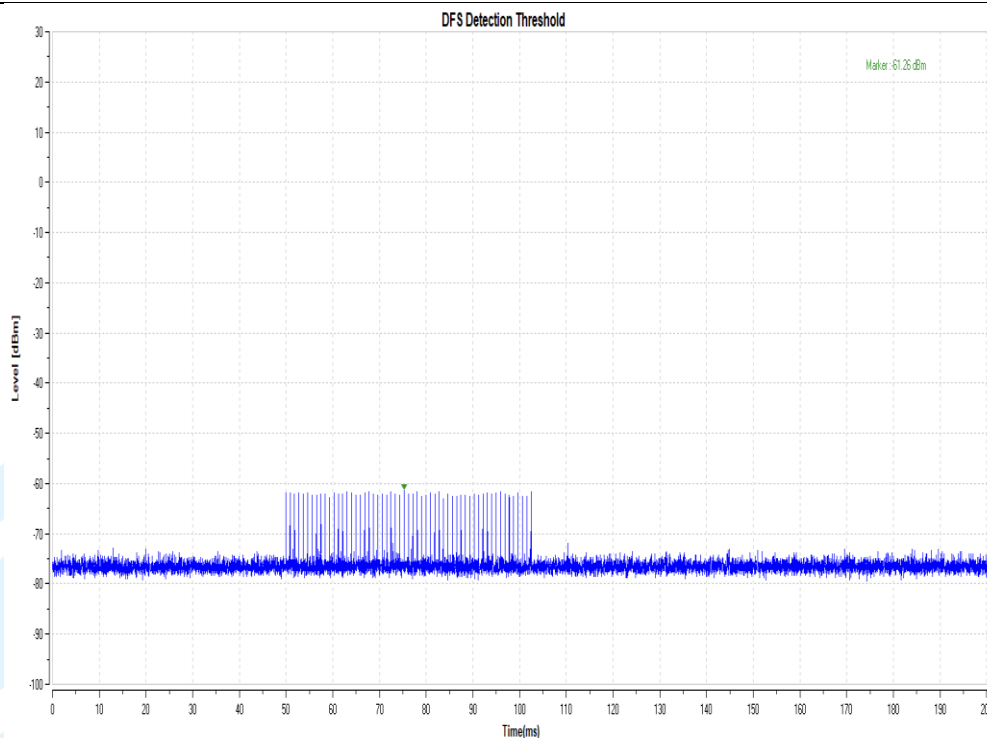

11AX160SISO-5250-Type1-PASS

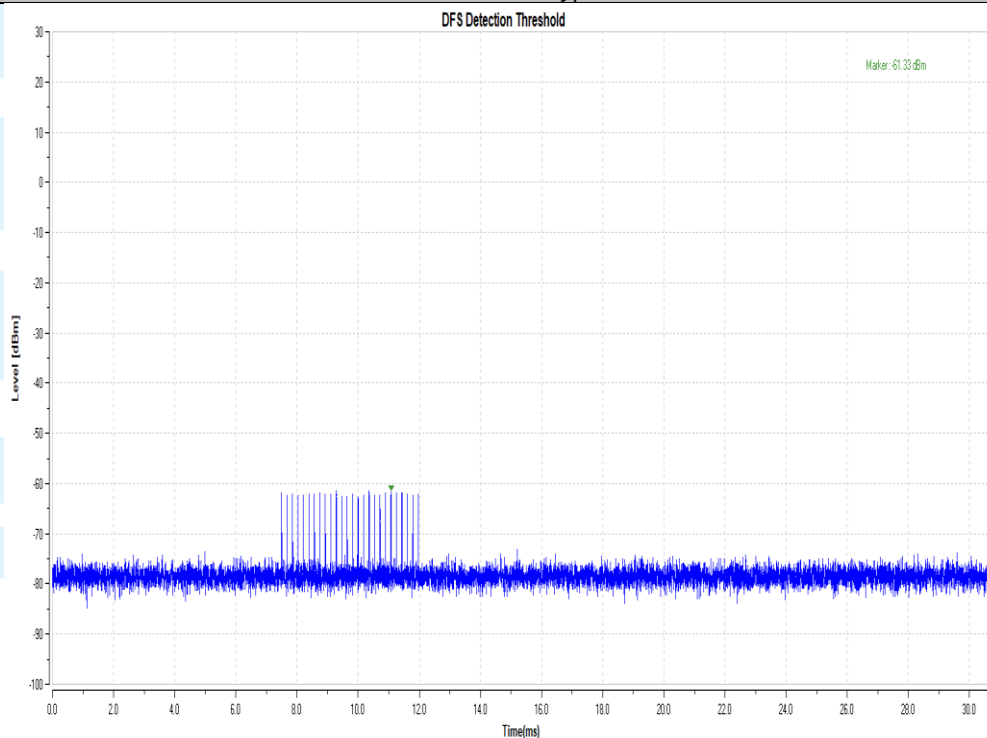

11AX160SISO-5250-Type2-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

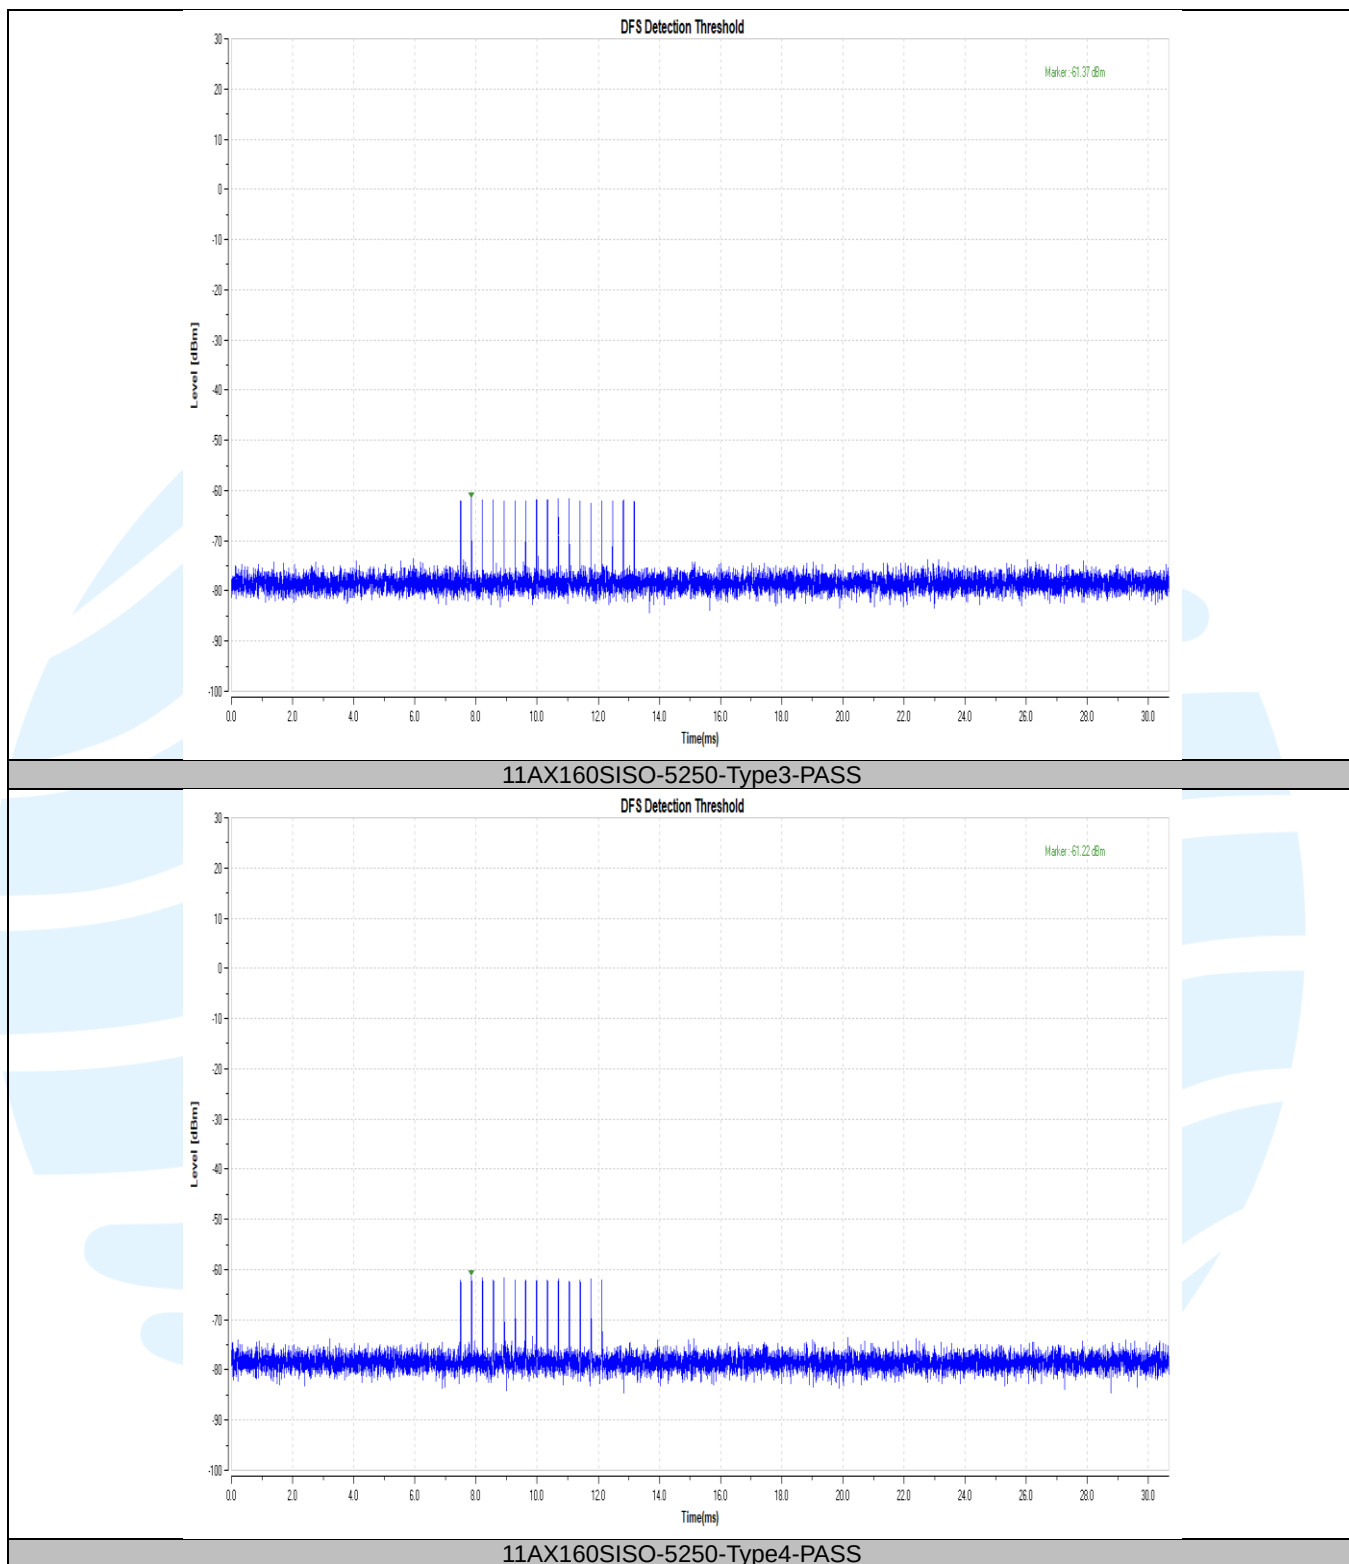

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

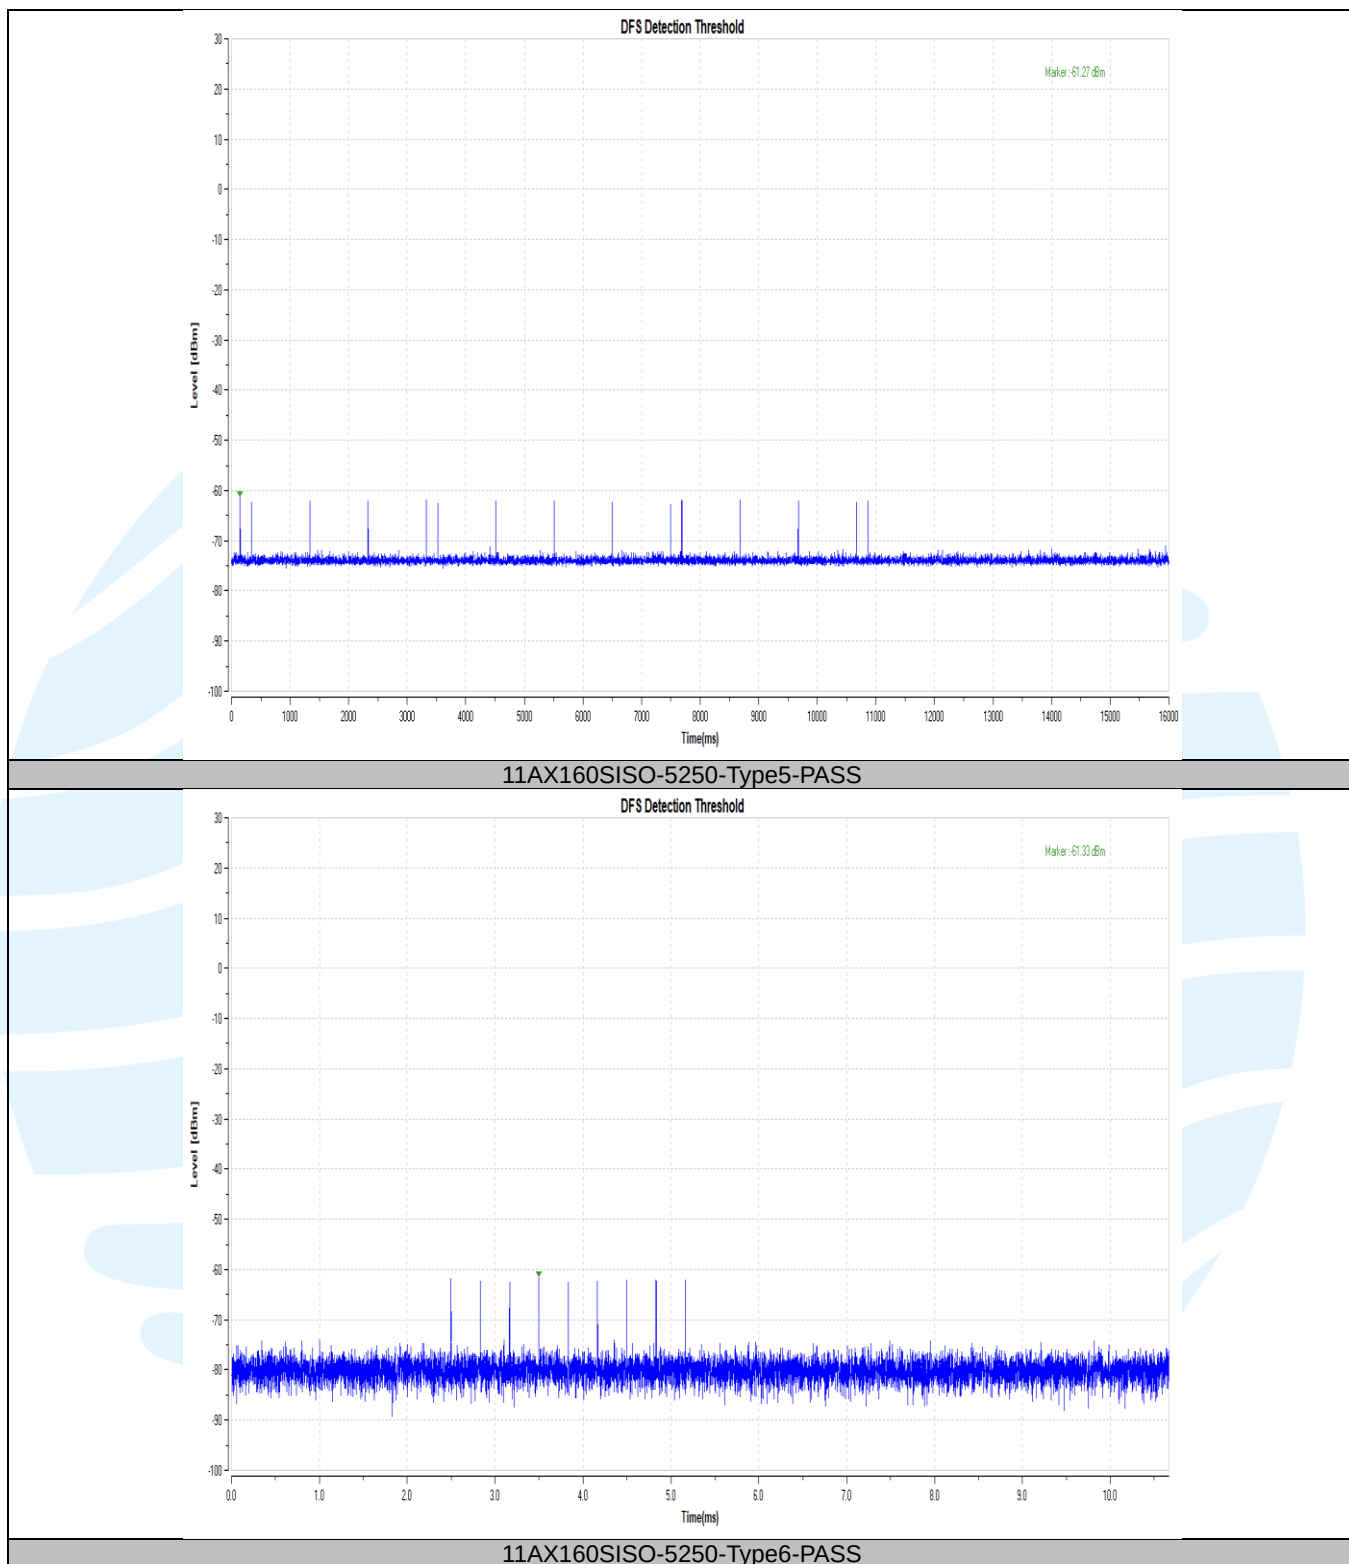

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

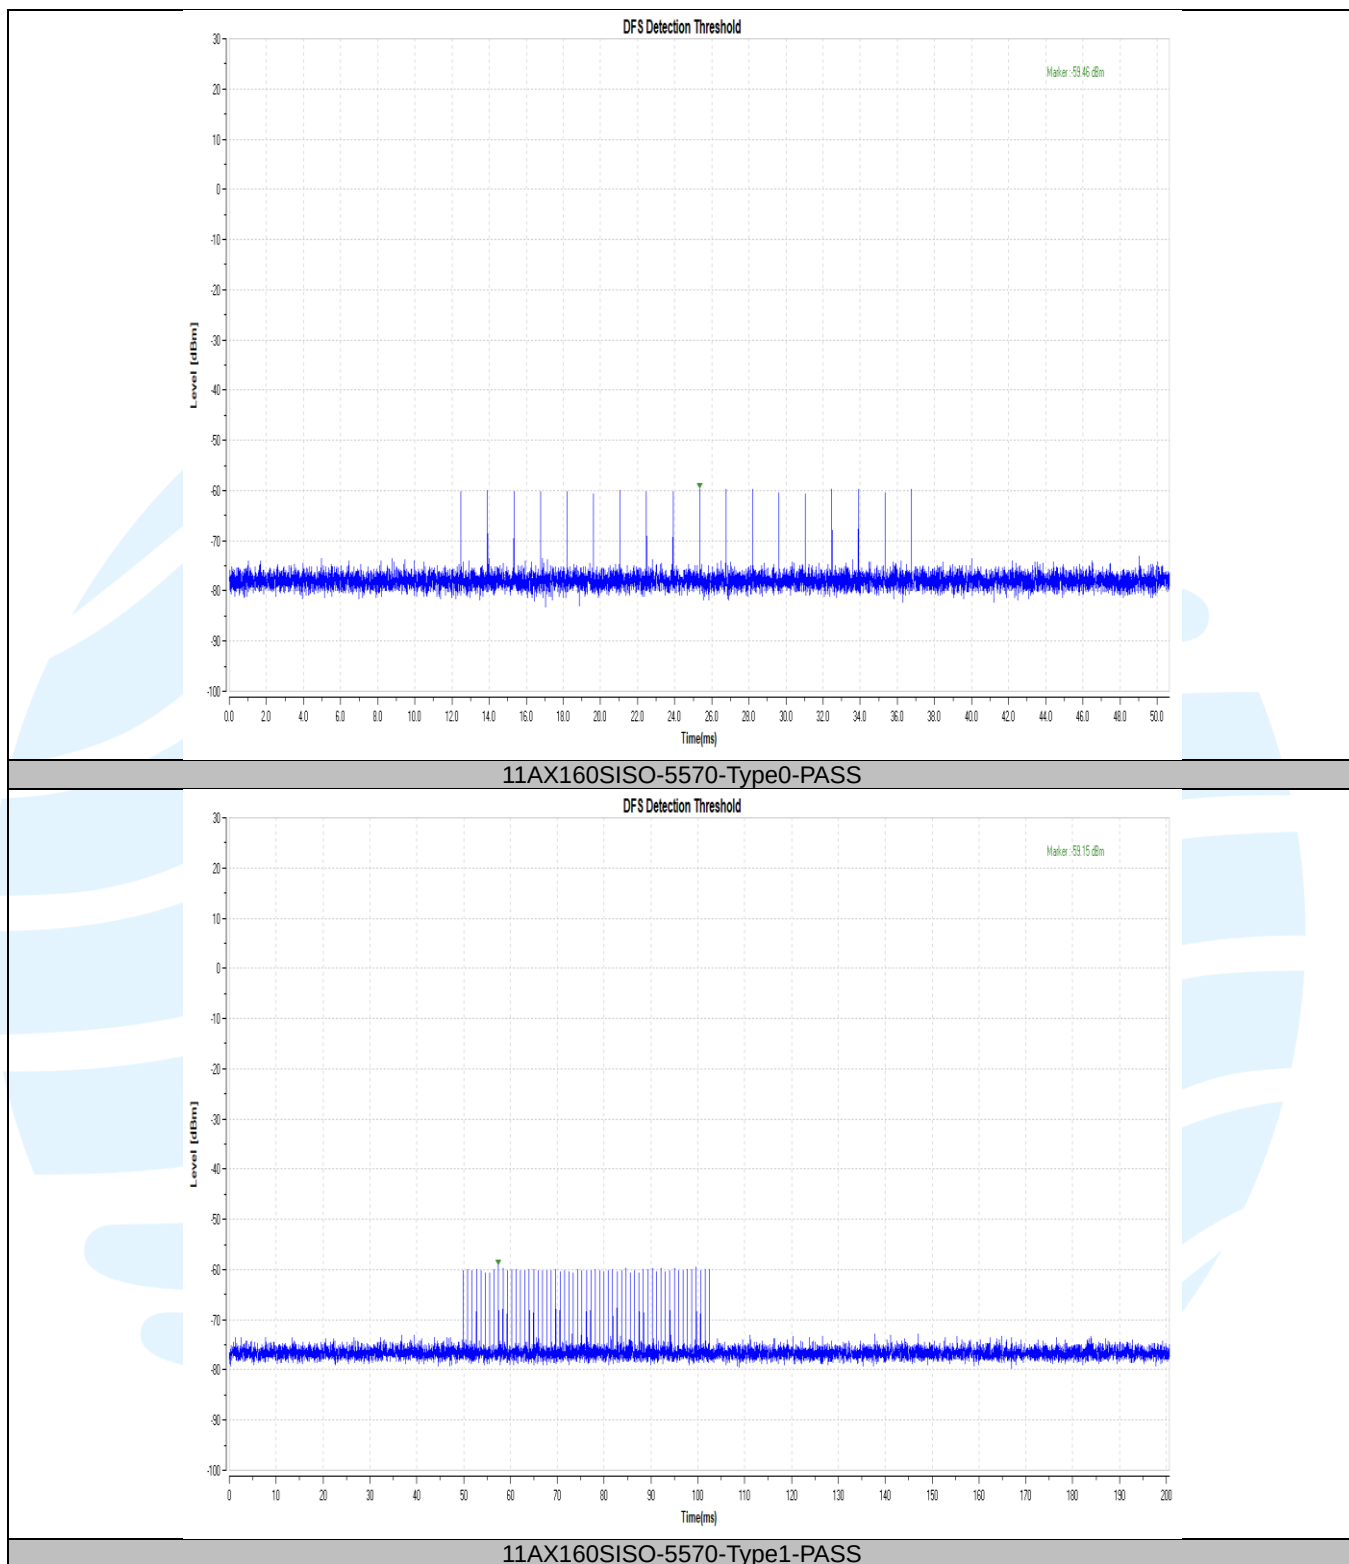

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

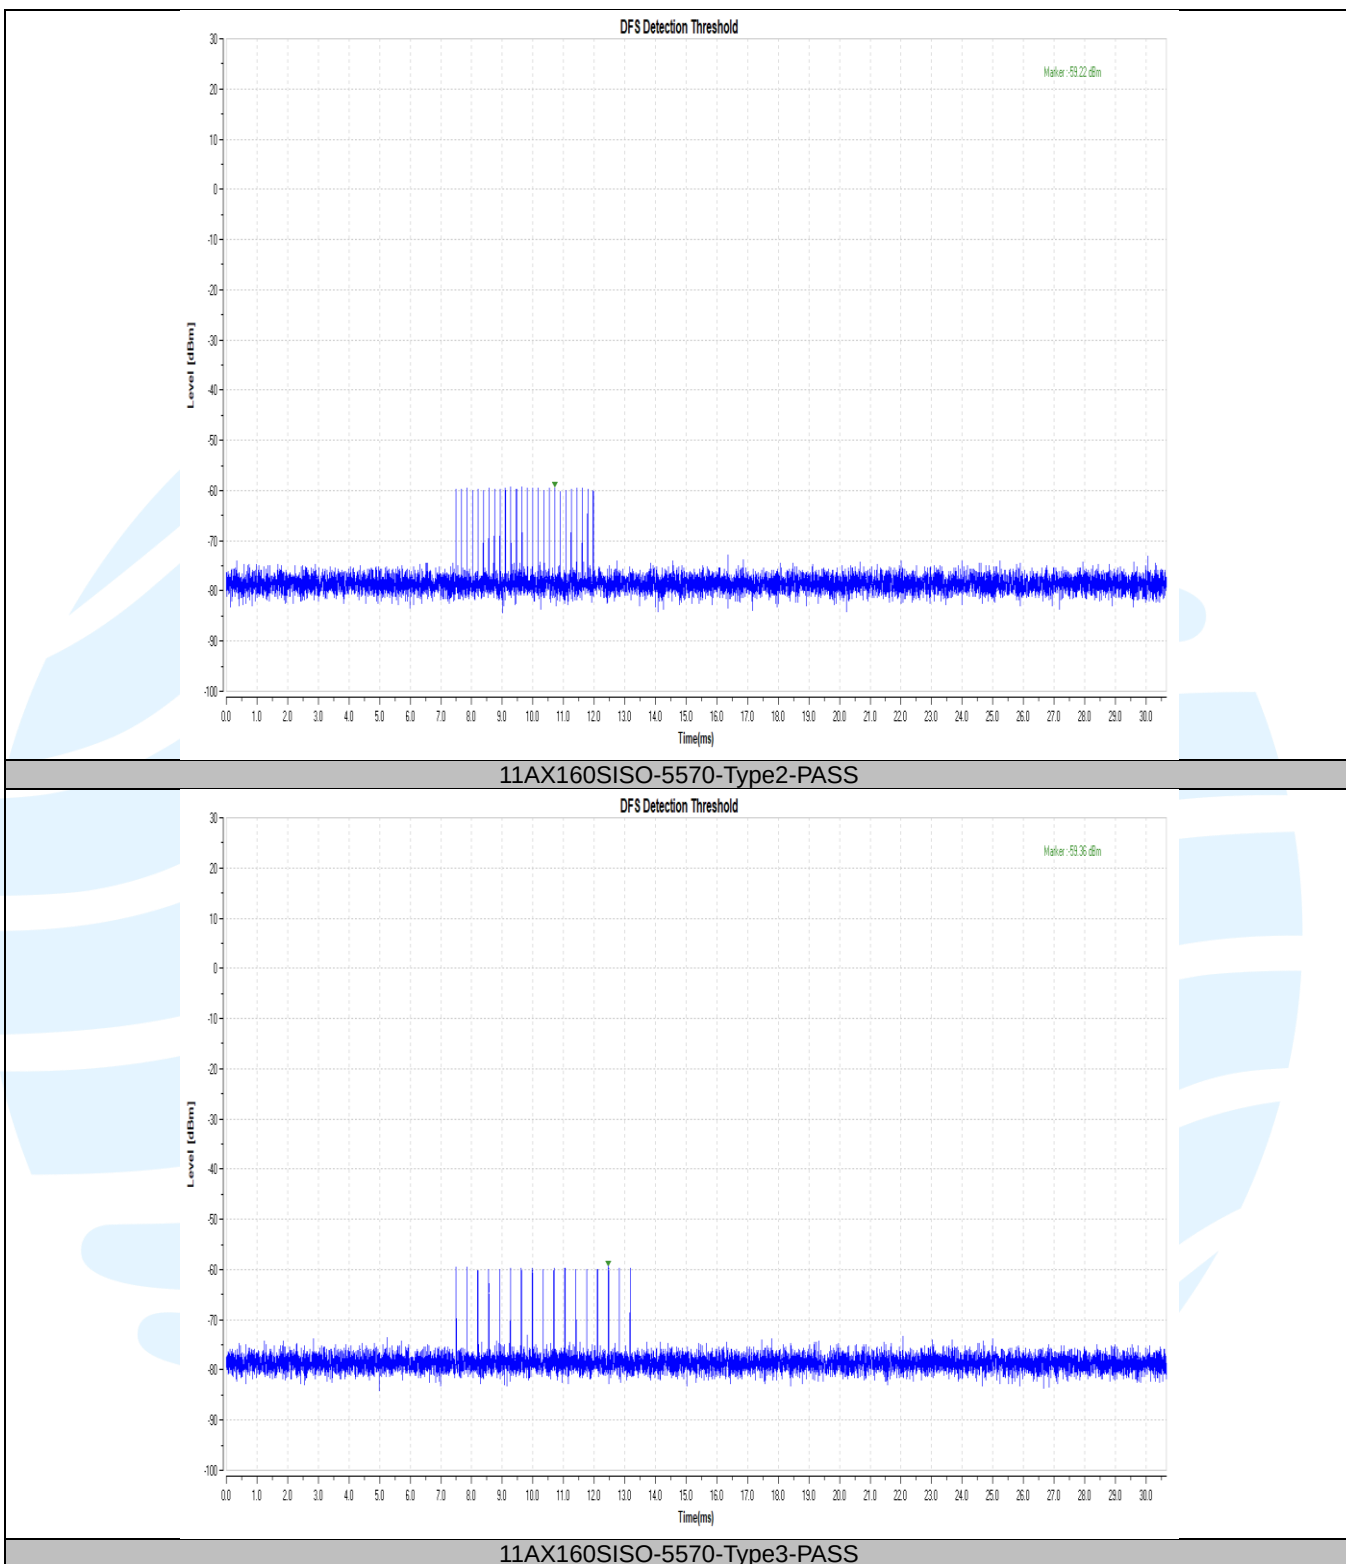

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

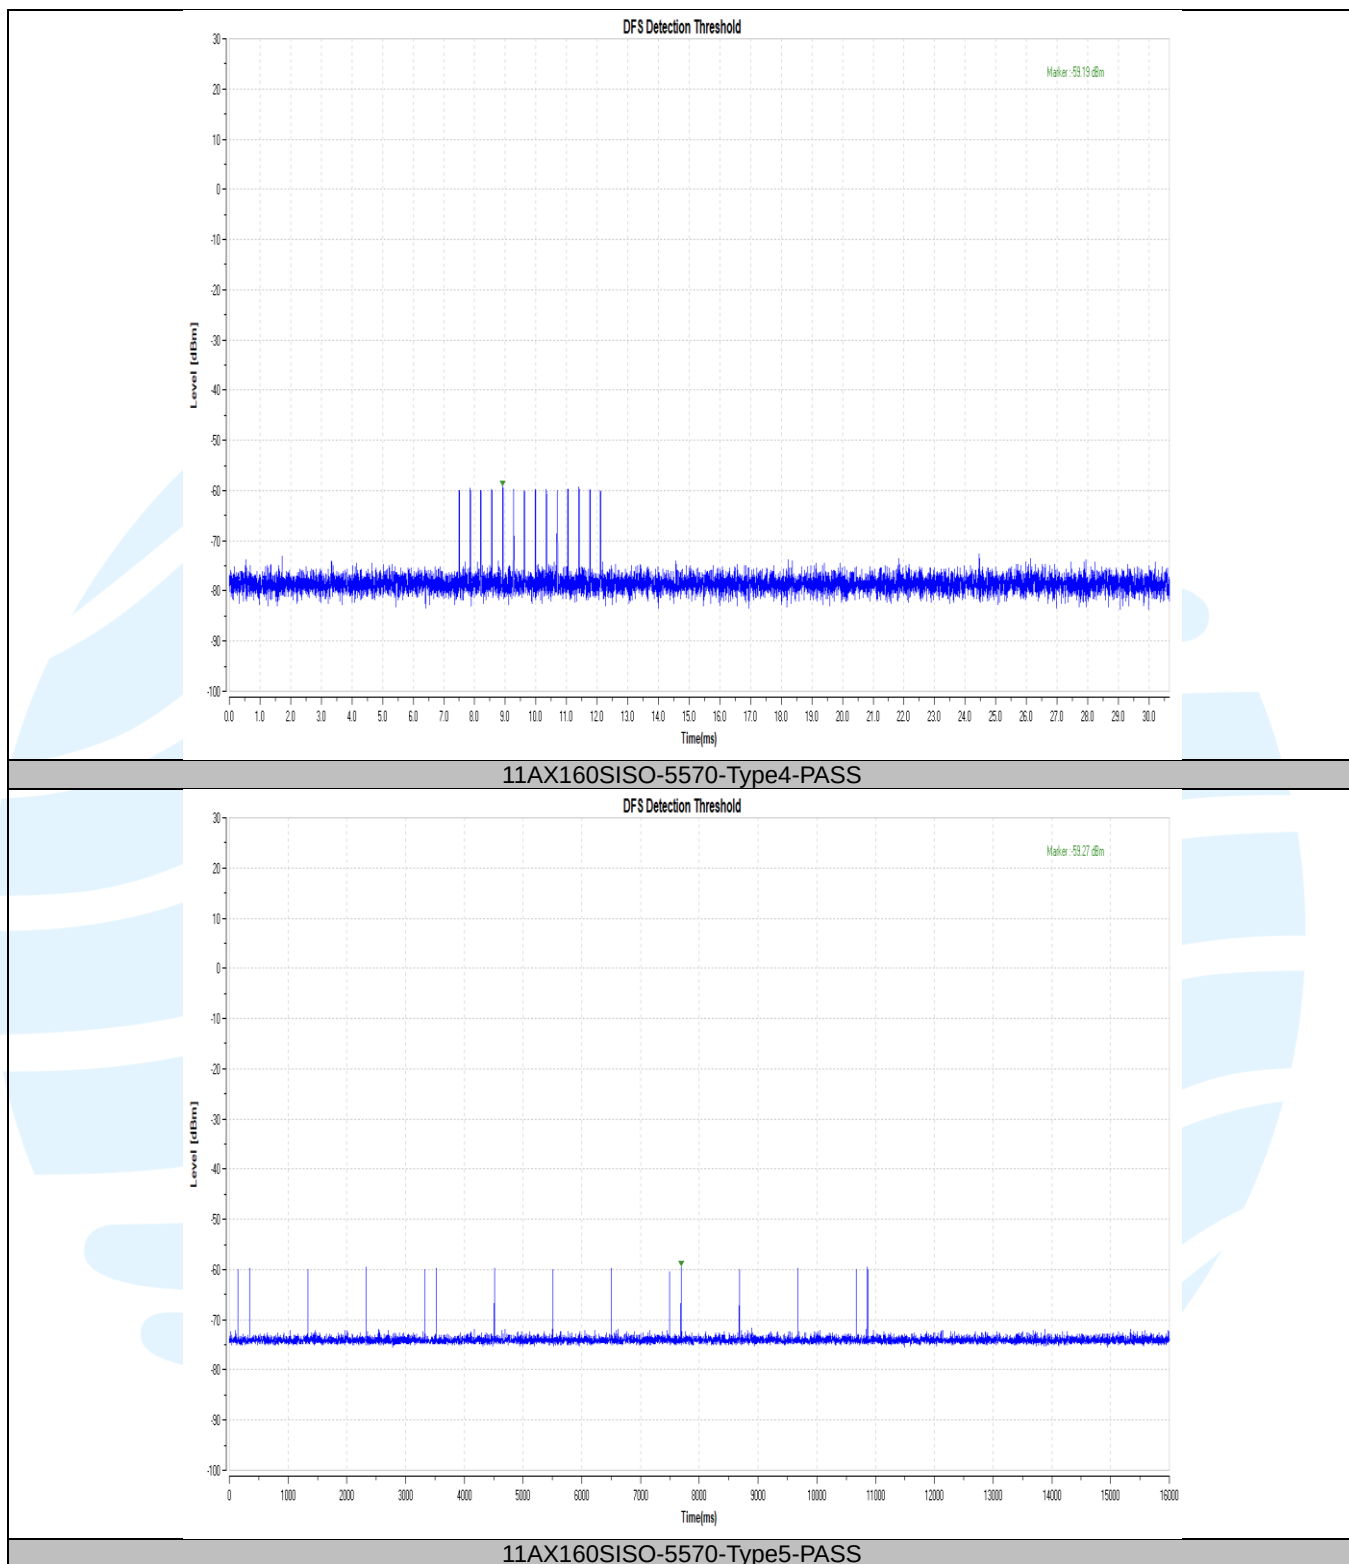

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

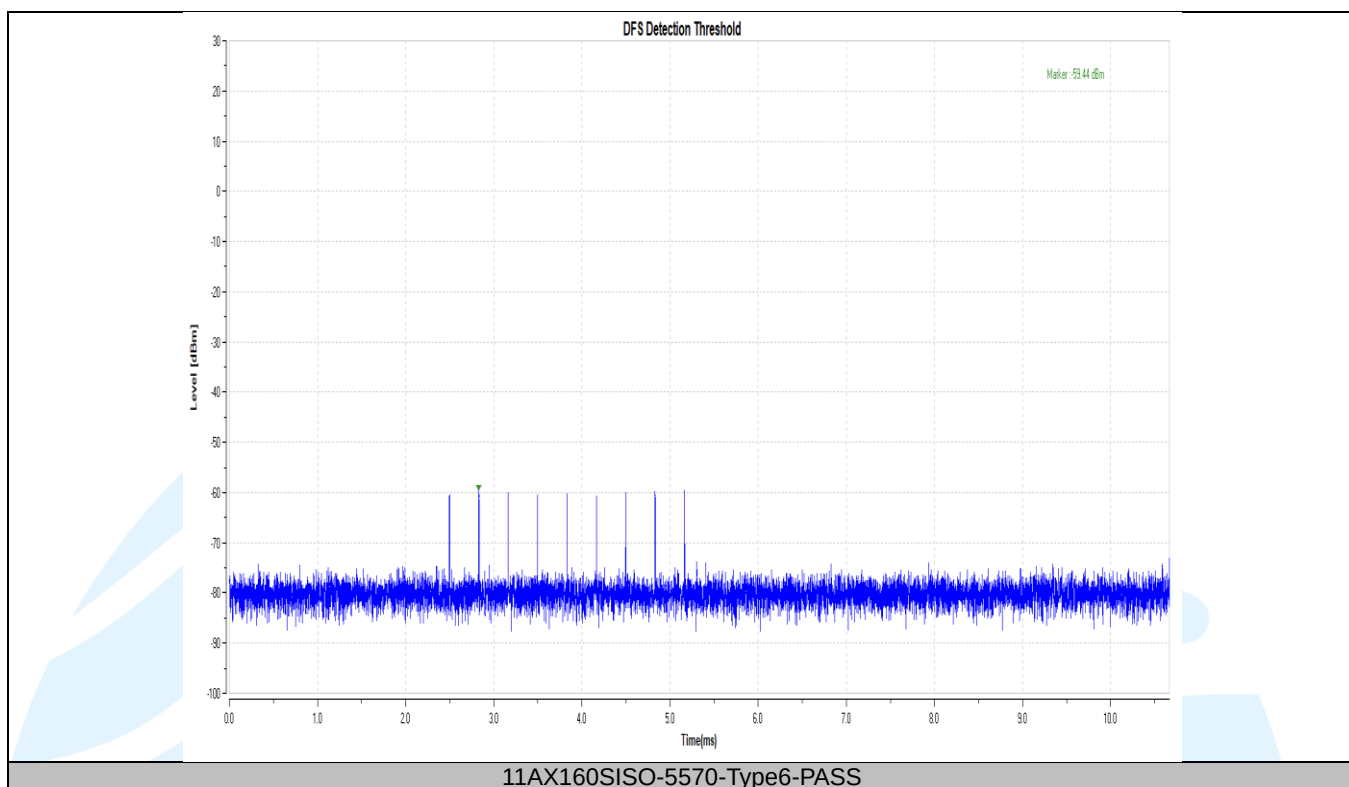

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

6.2 U-NII DETECTION BANDWIDTH (7.8.1)

6.2.1 Limit of U-NII Detection Bandwidth


The U-NII Detection Bandwidth shall contain minimum 100% of the 99% power bandwidth.

During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

6.2.2 Test Procedures

- (1) Adjust the equipment to produce a single burst of the Short Pulse Radar Type 0 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
- (2) (Set the EUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio of 0%/100% during this test.
- (3) Generate a single radar burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion.
- (4) Starting at the center frequency of the EUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
- (5) Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
- (6) The U-NII Detection Bandwidth is calculated as follows:
- (7) $\text{U-NII Detection Bandwidth} = F_H - F_L$

6.2.3 Test Setup

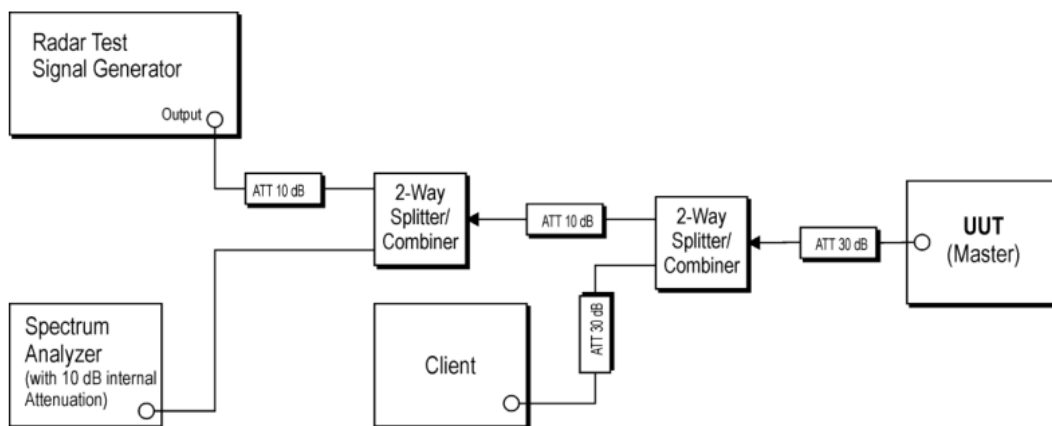

6.2.4 Test Deviation

There is no deviation with the original standard.

6.2.5 Result of U-NII Detection Bandwidth

20MHz / 5260MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5250	-10	V	V	V	V	V	V	V	V	V	V	100	FL
5251	-9	V	V	V	V	V	V	V	V	V	V	100	
5252	-8	V	V	V	V	V	V	V	V	V	V	100	
5253	-7	V	V	V	V	V	V	V	V	V	V	100	
5254	-6	V	V	V	V	V	V	V	V	V	V	100	
5255	-5	V	V	V	V	V	V	V	V	V	V	100	
5260	0	V	V	V	V	V	V	V	V	V	V	100	
5265	+5	V	V	V	V	V	V	V	V	V	V	100	
5266	+6	V	V	V	V	V	V	V	V	V	V	100	
5267	+7	V	V	V	V	V	V	V	V	V	V	100	
5268	+8	V	V	V	V	V	V	V	V	V	V	100	
5269	+9	V	V	V	V	V	V	V	V	V	V	100	
5270	+10	V	V	V	V	V	V	V	V	V	V	100	FH
Detection Bandwidth = F _H – F _L = 5270 – 5250 = 20 MHz													
EUT 99% Bandwidth = 19.085 MHz (Refer to channel 52)													

40MHz / 5270MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5250	-20	-	-	-	-	-	-	-	-	-	-	-	
5251	-19	V	V	V	V	V	V	V	V	V	V	100	FL
5252	-18	V	V	V	V	V	V	V	V	V	V	100	
5253	-17	V	V	V	V	V	V	V	V	V	V	100	
5254	-16	V	V	V	V	V	V	V	V	V	V	100	
5255	-15	V	V	V	V	V	V	V	V	V	V	100	
5260	-10	V	V	V	V	V	V	V	V	V	V	100	
5265	-5	V	V	V	V	V	V	V	V	V	V	100	
5270	0	V	V	V	V	V	V	V	V	V	V	100	
5275	+5	V	V	V	V	V	V	V	V	V	V	100	
5280	+10	V	V	V	V	V	V	V	V	V	V	100	
5285	+15	V	V	V	V	V	V	V	V	V	V	100	
5286	+16	V	V	V	V	V	V	V	V	V	V	100	
5287	+17	V	V	V	V	V	V	V	V	V	V	100	
5288	+18	V	V	V	V	V	V	V	V	V	V	100	
5289	+19	V	V	V	V	V	V	V	V	V	V	100	FH
5290	+20	-	-	-	-	-	-	-	-	-	-	-	
Detection Bandwidth = F _H – F _L = 5289 – 5251 = 38 MHz													
EUT 99% Bandwidth = 37.582 MHz (Refer to channel 62)													

20MHz / 5500MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5490	-10	V	V	V	V	V	V	V	V	V	V	100	FL
5491	-9	V	V	V	V	V	V	V	V	V	V	100	
5492	-8	V	V	V	V	V	V	V	V	V	V	100	
5493	-7	V	V	V	V	V	V	V	V	V	V	100	
5494	-6	V	V	V	V	V	V	V	V	V	V	100	
5495	-5	V	V	V	V	V	V	V	V	V	V	100	
5500	0	V	V	V	V	V	V	V	V	V	V	100	
5505	+5	V	V	V	V	V	V	V	V	V	V	100	
5506	+6	V	V	V	V	V	V	V	V	V	V	100	
5507	+7	V	V	V	V	V	V	V	V	V	V	100	
5508	+8	V	V	V	V	V	V	V	V	V	V	100	
5509	+9	V	V	V	V	V	V	V	V	V	V	100	
5510	+10	V	V	V	V	V	V	V	V	V	V	100	FH
Detection Bandwidth = F _H – F _L = 5510 – 5490 = 20 MHz													
EUT 99% Bandwidth = 19.173 MHz (Refer to channel 100)													

40MHz / 5510MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5490	-20	-	-	-	-	-	-	-	-	-	-	-	
5491	-19	V	V	V	V	V	V	V	V	V	V	100	FL
5492	-18	V	V	V	V	V	V	V	V	V	V	100	
5493	-17	V	V	V	V	V	V	V	V	V	V	100	
5494	-16	V	V	V	V	V	V	V	V	V	V	100	
5495	-15	V	V	V	V	V	V	V	V	V	V	100	
5500	-10	V	V	V	V	V	V	V	V	V	V	100	
5505	-5	V	V	V	V	V	V	V	V	V	V	100	
5510	0	V	V	V	V	V	V	V	V	V	V	100	
5515	+5	V	V	V	V	V	V	V	V	V	V	100	
5520	+10	V	V	V	V	V	V	V	V	V	V	100	
5525	+15	V	V	V	V	V	V	V	V	V	V	100	
5526	+16	V	V	V	V	V	V	V	V	V	V	100	
5527	+17	V	V	V	V	V	V	V	V	V	V	100	
5528	+18	V	V	V	V	V	V	V	V	V	V	100	
5529	+19	V	V	V	V	V	V	V	V	V	V	100	FH
5530	+20	-	-	-	-	-	-	-	-	-	-	-	
Detection Bandwidth = F _H – F _L = 5529- 5491 = 38 MHz													
EUT 99% Bandwidth = 37.831 MHz (Refer to channel 102)													

80MHz / 5290MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5250	-40	-	-	-	-	-	-	-	-	-	-	-	
5251	-39	V	V	V	V	V	V	V	V	V	V	100	FL
5252	-38	V	V	V	V	V	V	V	V	V	V	100	
5253	-37	V	V	V	V	V	V	V	V	V	V	100	
5254	-36	V	V	V	V	V	V	V	V	V	V	100	
5255	-35	V	V	V	V	V	V	V	V	V	V	100	
5260	-30	V	V	V	V	V	V	V	V	V	V	100	
5265	-25	V	V	V	V	V	V	V	V	V	V	100	
5270	-20	V	V	V	V	V	V	V	V	V	V	100	
5275	-15	V	V	V	V	V	V	V	V	V	V	100	
5280	-10	V	V	V	V	V	V	V	V	V	V	100	
5290	0	V	V	V	V	V	V	V	V	V	V	100	
5300	+10	V	V	V	V	V	V	V	V	V	V	100	
5305	+15	V	V	V	V	V	V	V	V	V	V	100	
5310	+20	V	V	V	V	V	V	V	V	V	V	100	
5315	+25	V	V	V	V	V	V	V	V	V	V	100	
5320	+30	V	V	V	V	V	V	V	V	V	V	100	
5325	+35	V	V	V	V	V	V	V	V	V	V	100	
5326	+36	V	V	V	V	V	V	V	V	V	V	100	
5327	+37	V	V	V	V	V	V	V	V	V	V	100	
5328	+38	V	V	V	V	V	V	V	V	V	V	100	
5329	+39	V	V	V	V	V	V	V	V	V	V	100	FH
5330	+40	-	-	-	-	-	-	-	-	-	-	-	
Detection Bandwidth = F _H – F _L = 5329 – 5251 = 78 MHz EUT 99% Bandwidth = 77.591 MHz (Refer to channel 58)													

80MHz / 5530MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection =X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5490	-40	-	-	-	-	-	-	-	-	-	-	-	
5491	-39	V	V	V	V	V	V	V	V	V	V	100	FL
5492	-38	V	V	V	V	V	V	V	V	V	V	100	
5493	-37	V	V	V	V	V	V	V	V	V	V	100	
5494	-36	V	V	V	V	V	V	V	V	V	V	100	
5495	-35	V	V	V	V	V	V	V	V	V	V	100	
5500	-30	V	V	V	V	V	V	V	V	V	V	100	
5505	-25	V	V	V	V	V	V	V	V	V	V	100	
5510	-20	V	V	V	V	V	V	V	V	V	V	100	
5515	-15	V	V	V	V	V	V	V	V	V	V	100	
5520	-10	V	V	V	V	V	V	V	V	V	V	100	
5530	0	V	V	V	V	V	V	V	V	V	V	100	
5540	+10	V	V	V	V	V	V	V	V	V	V	100	
5545	+15	V	V	V	V	V	V	V	V	V	V	100	
5550	+20	V	V	V	V	V	V	V	V	V	V	100	
5555	+25	V	V	V	V	V	V	V	V	V	V	100	
5560	+30	V	V	V	V	V	V	V	V	V	V	100	
5565	+35	V	V	V	V	V	V	V	V	V	V	100	
5566	+36	V	V	V	V	V	V	V	V	V	V	100	
5567	+37	V	V	V	V	V	V	V	V	V	V	100	
5568	+38	V	V	V	V	V	V	V	V	V	V	100	
5569	+39	V	V	V	V	V	V	V	V	V	V	100	
5570	+40	V	V	V	V	V	V	V	V	V	V	100	FH
Detection Bandwidth = F _H – F _L = 5570 – 5491 = 79 MHz													
EUT 99% Bandwidth = 78.122 MHz (Refer to channel 106)													

160MHz / 5250MHz													
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5170	-80	-	-	-	-	-	-	-	-	-	-	-	
5171	-79	-	-	-	-	-	-	-	-	-	-	-	
5172	-78	-	-	-	-	-	-	-	-	-	-	-	FL
5173	-77	-	-	-	-	-	-	-	-	-	-	-	
5174	-76	-	-	-	-	-	-	-	-	-	-	-	
5175	-75	-	-	-	-	-	-	-	-	-	-	-	
5180	-70	-	-	-	-	-	-	-	-	-	-	-	
5190	-60	-	-	-	-	-	-	-	-	-	-	-	
5200	-50	-	-	-	-	-	-	-	-	-	-	-	
5210	-40	-	-	-	-	-	-	-	-	-	-	-	
5230	-20	-	-	-	-	-	-	-	-	-	-	-	
5250	0	V	V	V	V	V	V	V	V	V	V	100	
5270	+20	V	V	V	V	V	V	V	V	V	V	100	
5290	+40	V	V	V	V	V	V	V	V	V	V	90	
5310	+60	V	V	V	V	V	V	V	V	V	V	100	
5315	+65	V	V	V	V	V	V	V	V	V	V	100	
5320	+70	V	V	V	V	V	V	V	V	V	V	90	
5325	+75	V	V	V	V	V	V	V	V	V	V	100	
5326	+76	V	V	V	V	V	V	V	V	V	V	90	
5327	+77	V	V	V	V	V	V	V	V	V	V	90	
5328	+78	V	V	V	V	V	V	V	V	V	V	100	
5329	+79	V	V	V	V	V	V	V	V	V	V	100	FH
5330	+80	-	-	-	-	-	-	-	-	-	-	-	
Detection Bandwidth = F _H – F _L = 5329 – 5172 = 157 MHz EUT 99% Bandwidth = 156.55 MHz (Refer to channel 50)													

160MHz / 5570MHz														
Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = X)										Rate (%)	F _H /F _L	
		1	2	3	4	5	6	7	8	9	10			
5490	-80	-	-	-	-	-	-	-	-	-	-	-		
5491	-79	-	-	-	-	-	-	-	-	-	-	-		
5492	-78	-	-	-	-	-	-	-	-	-	-	-		
5493	-77	V	V	V	V	V	V	V	V	V	V	90	FL	
5494	-76	V	V	V	V	V	V	V	V	V	V	100		
5495	-75	V	V	V	V	V	V	V	V	V	V	90		
5505	-65	V	V	V	V	V	V	V	V	V	V	100		
5515	-55	V	V	V	V	V	V	V	V	V	V	90		
5520	-50	V	V	V	V	V	V	V	V	V	V	100		
5530	-40	V	V	V	V	V	V	V	V	V	V	100		
5550	-20	V	V	V	V	V	V	V	V	V	V	100		
5570	0	V	V	V	V	V	V	V	V	V	V	100		
5590	20	V	V	V	V	V	V	V	V	V	V	90		
5610	40	V	V	V	V	V	V	V	V	V	V	100		
5620	50	V	V	V	V	V	V	V	V	V	V	100		
5630	60	V	V	V	V	V	V	V	V	V	V	90		
5640	70	V	V	V	V	V	V	V	V	V	V	100		
5645	75	V	V	V	V	V	V	V	V	V	V	100		
5646	76	V	V	V	V	V	V	V	V	V	V	90		
5647	77	V	V	V	V	V	V	V	V	V	V	90		
5648	78	V	V	V	V	V	V	V	V	V	V	100		
5649	79	V	V	V	V	V	V	V	V	V	V	100	FH	
5650	80	-	-	-	-	-	-	-	-	-	-	-		
Detection Bandwidth = F _H – F _L = 5649 – 5493 = 156 MHz EUT 99% Bandwidth = 155.99 MHz (Refer to channel 114)														

6.3 CHANNEL AVAILABILITY CHECK (7.8.2)

6.3.1 Limit of Channel Availability Check

The Initial Channel Availability Check Time tests that the EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for radar waveforms for one minute on the test Channel.

6.3.2 Test Procedures

6.3.2.1 Initial Channel Availability Check Time

This test does not use any radar waveforms and only needs to be performed one time.

- (1) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
- (2) The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

6.3.2.2 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time. This is illustrated in Figure 15.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T1 and will end no sooner than T1 + T_{ch_avail_check}.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at T1. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

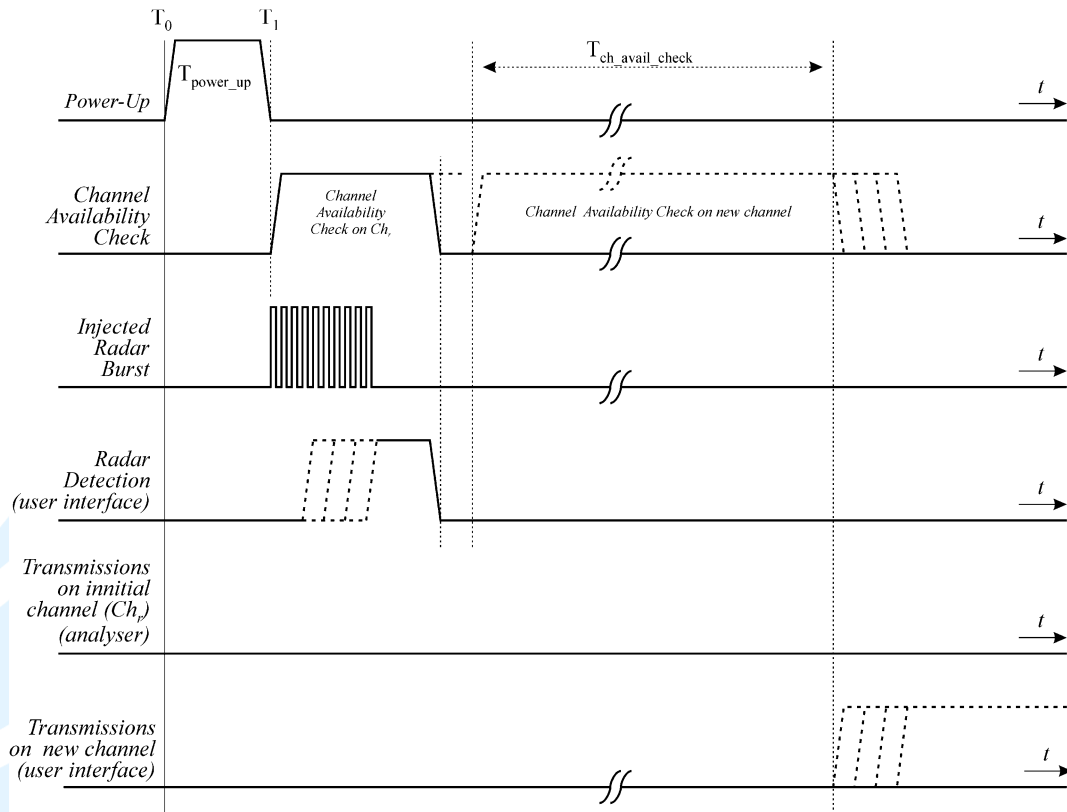


Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time

6.3.2.3 Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time. This is illustrated in Figure 16.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T_0 . T_1 denotes the instant when the EUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{ch_avail_check}$.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at $T_1 + 54$ seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.


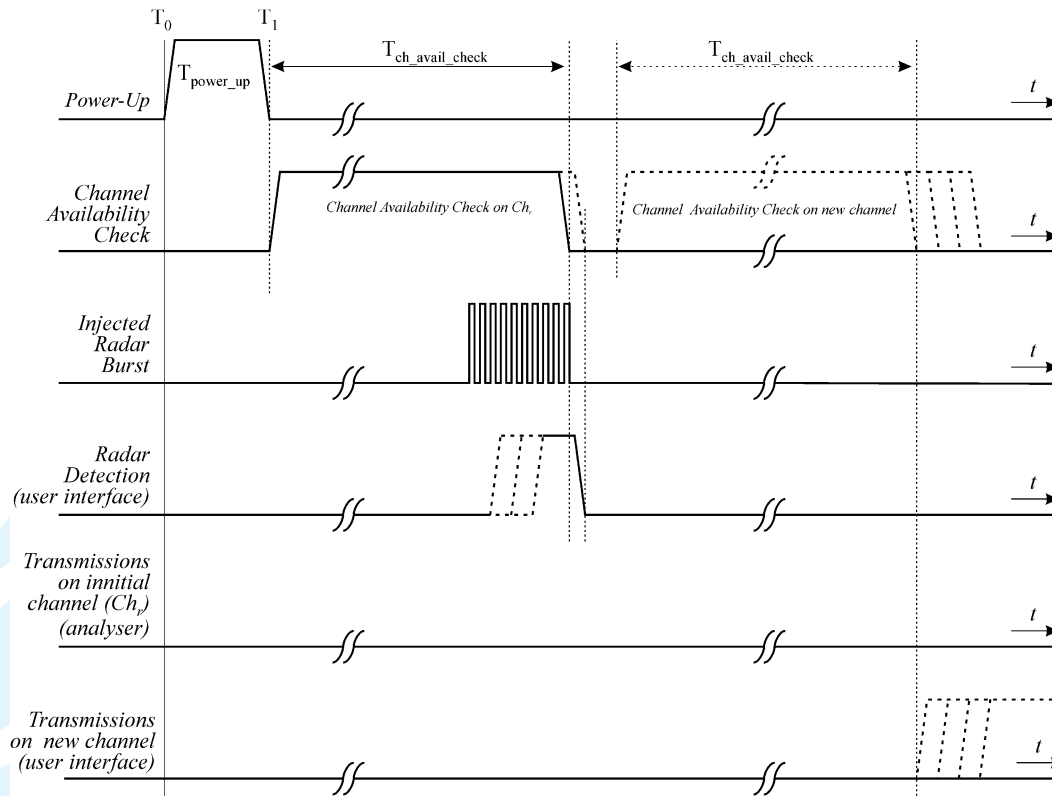


Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time

6.3.3 Test Setup

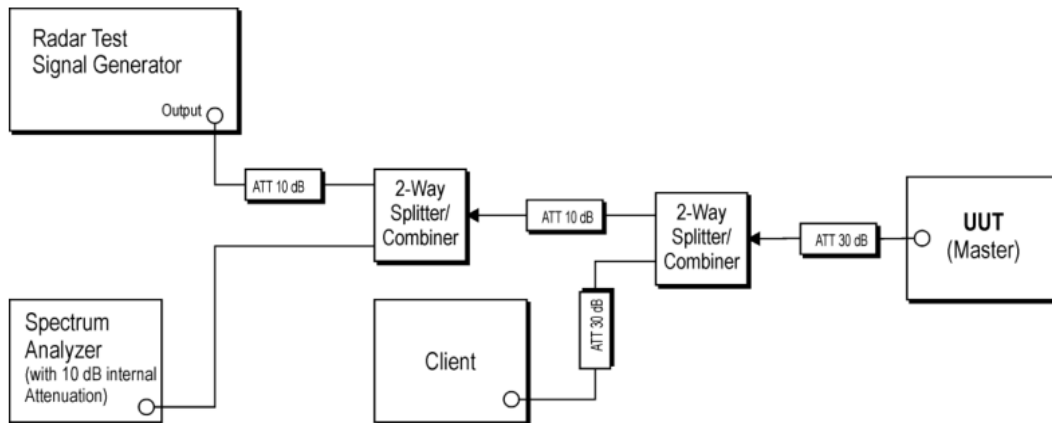

6.3.4 Test Deviation


There is no deviation with the original standard.


6.3.5 Result of Channel Availability Check Time

Test Mode	Frequency [MHz]	Result	Verdict
11AX20SISO	5260	See test Graph	PASS
11AX20SISO	5500	See test Graph	PASS
11AX160SISO	5250	See test Graph	PASS
11AX160SISO	5570	See test Graph	PASS


Test Mode	Frequency [MHz]	Result	Verdict
11AX20SISO	5260	See test Graph	PASS
11AX20SISO	5500	See test Graph	PASS
11AX160SISO	5250	See test Graph	PASS
11AX160SISO	5570	See test Graph	PASS

Test Mode	Frequency [MHz]	Result	Verdict
11AX20SISO	5260	See test Graph	PASS
11AX20SISO	5500	See test Graph	PASS
11AX160SISO	5250	See test Graph	PASS
11AX160SISO	5570	See test Graph	PASS

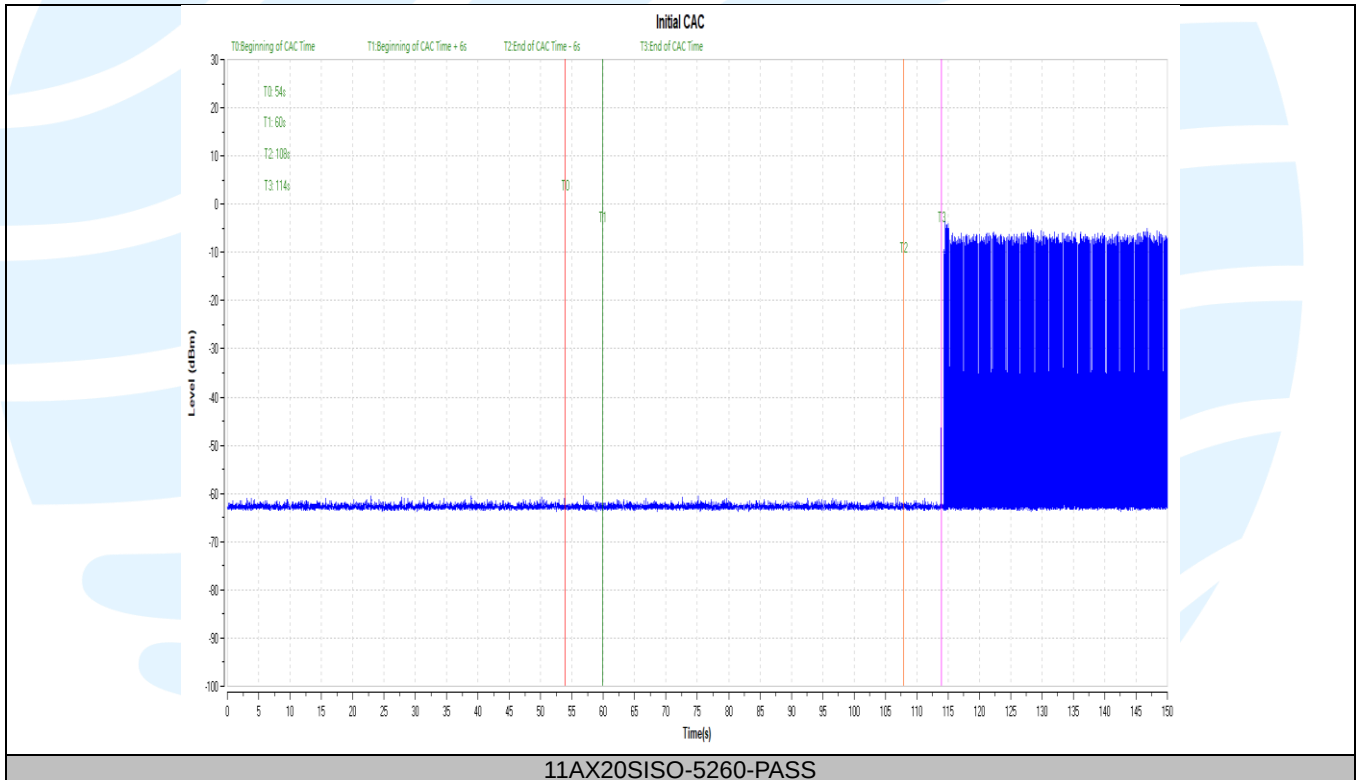Test Graphs

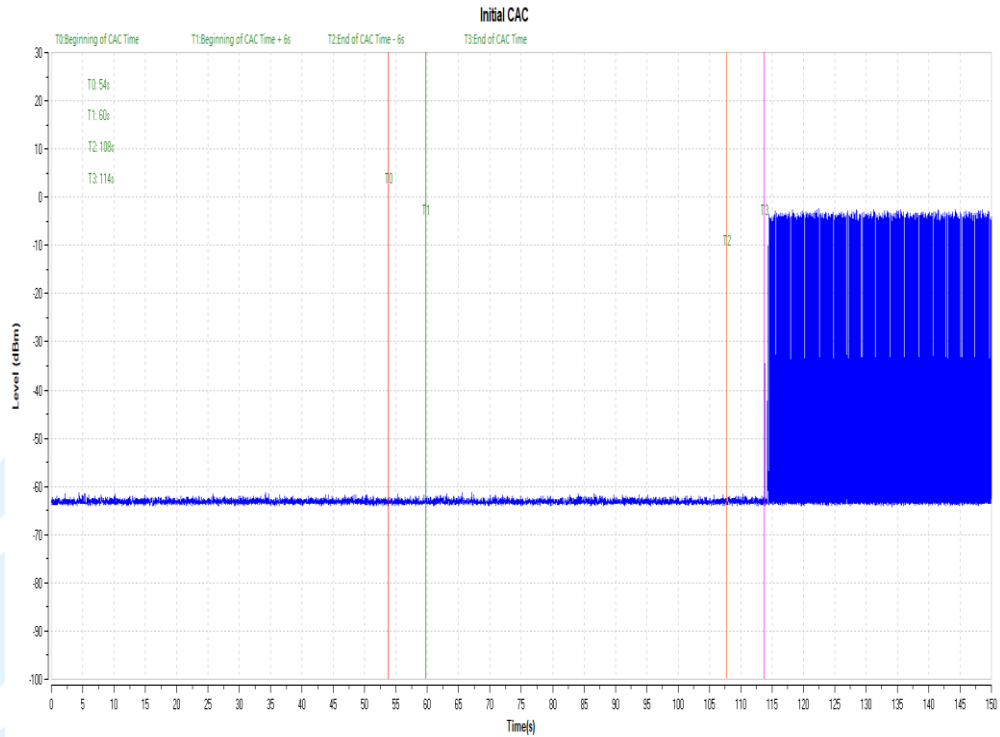

11AX20SISO-5500-PASS

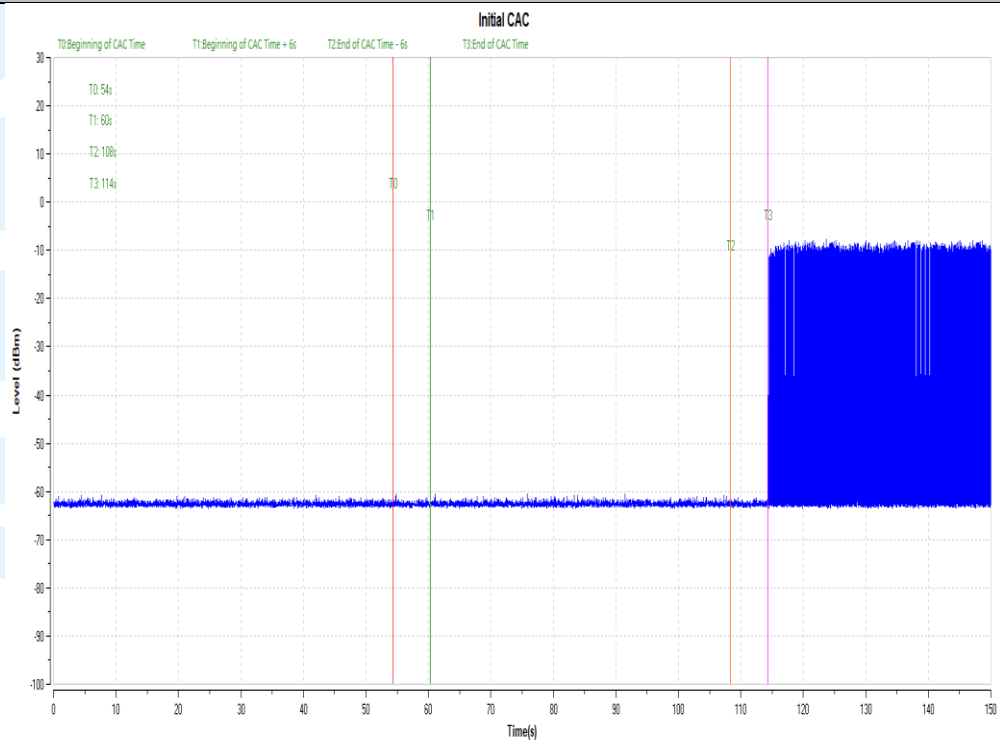

11AX160SISO-5250-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.



Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888



Fax: +86-755-28230886


E-mail: info@uttlab.com
<http://www.uttlab.com>


UTTR-RF-FCCPART15.407-V1.3

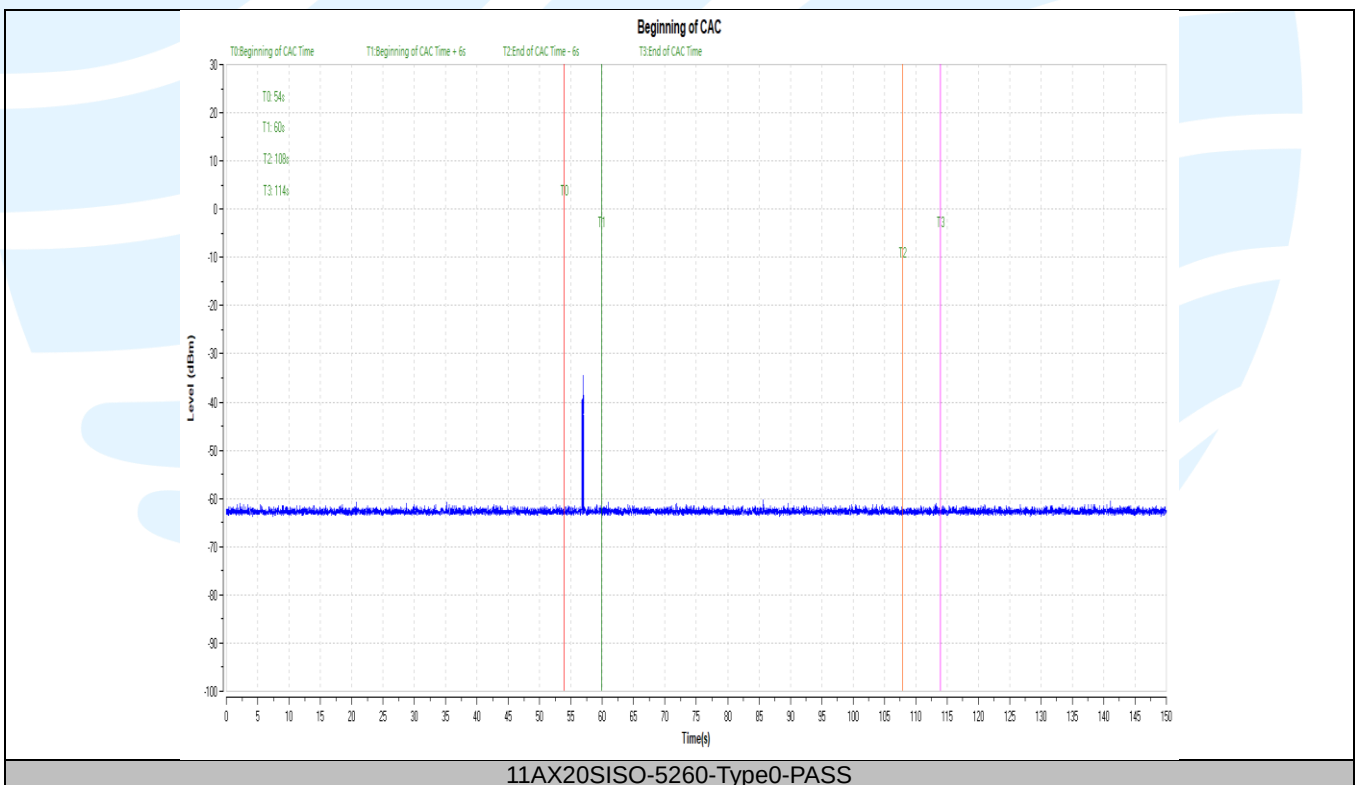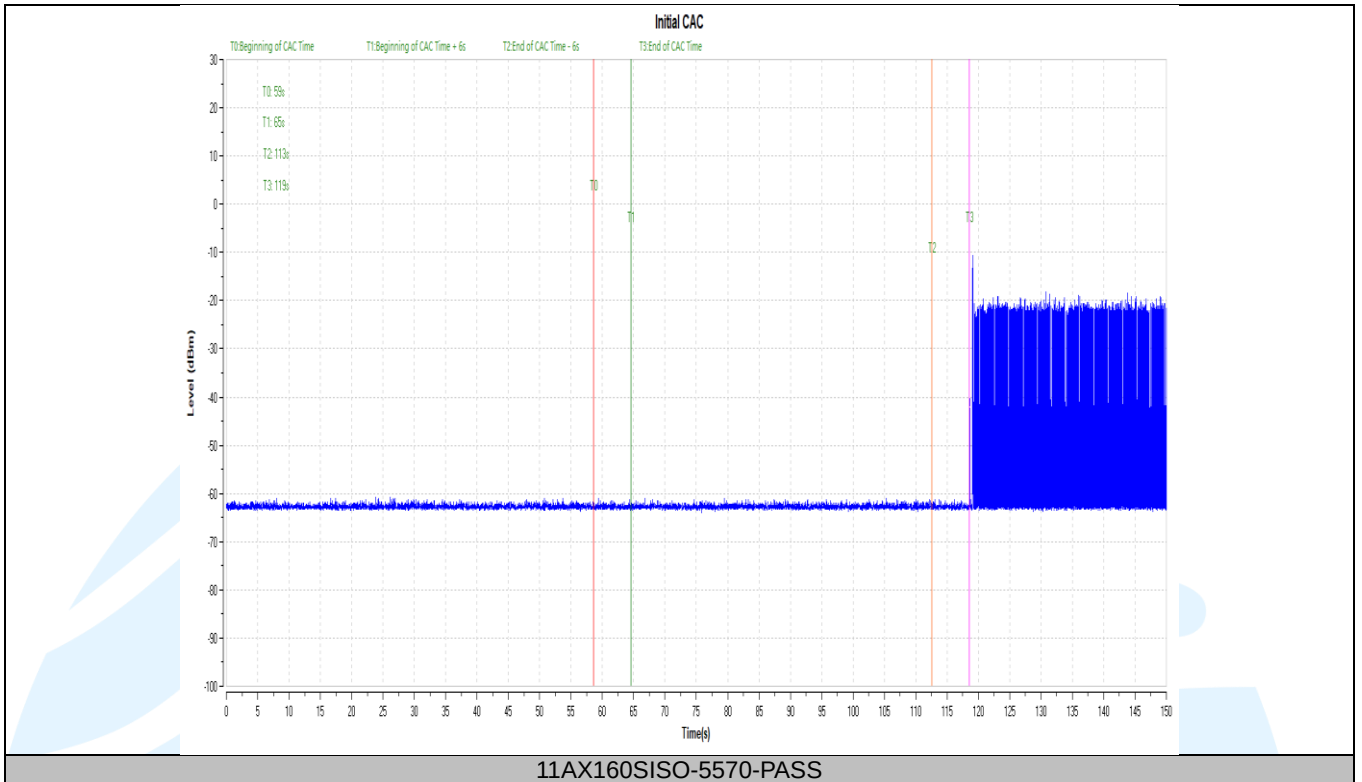

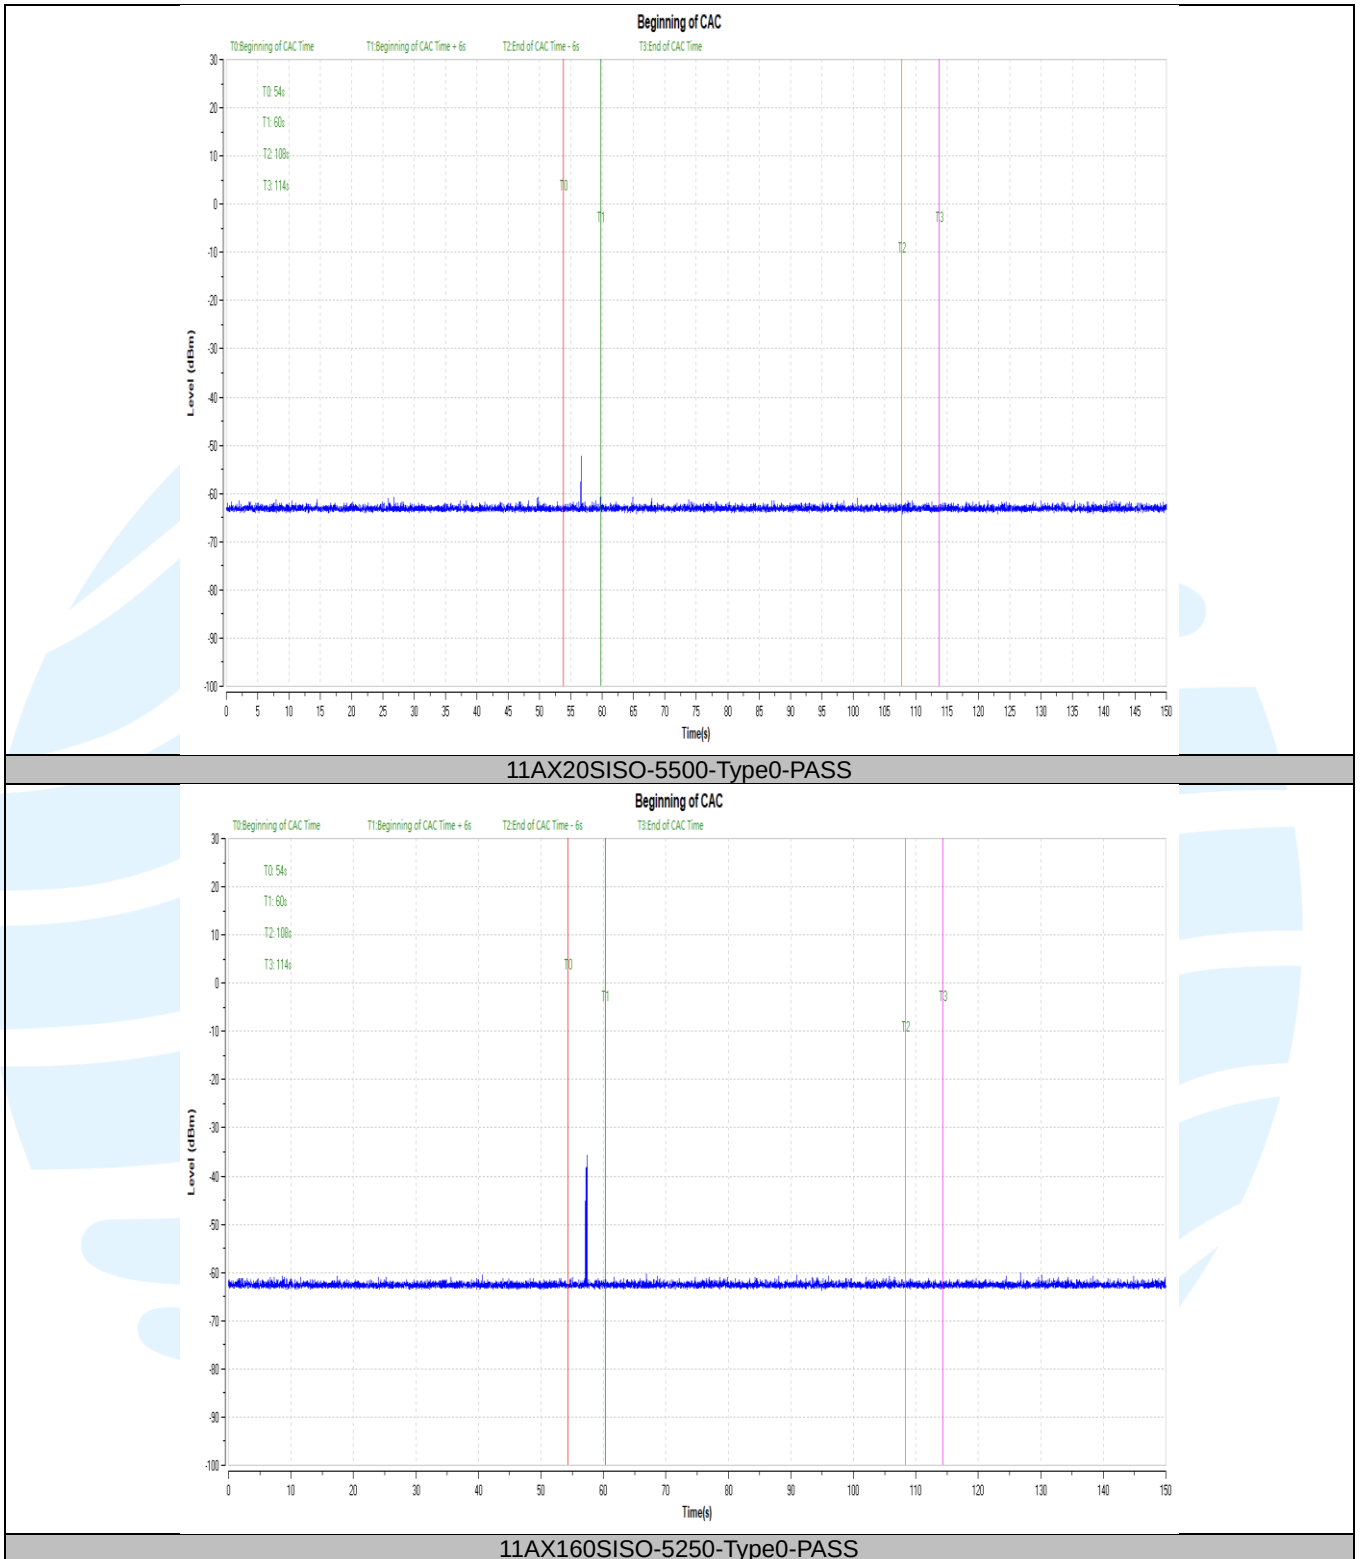

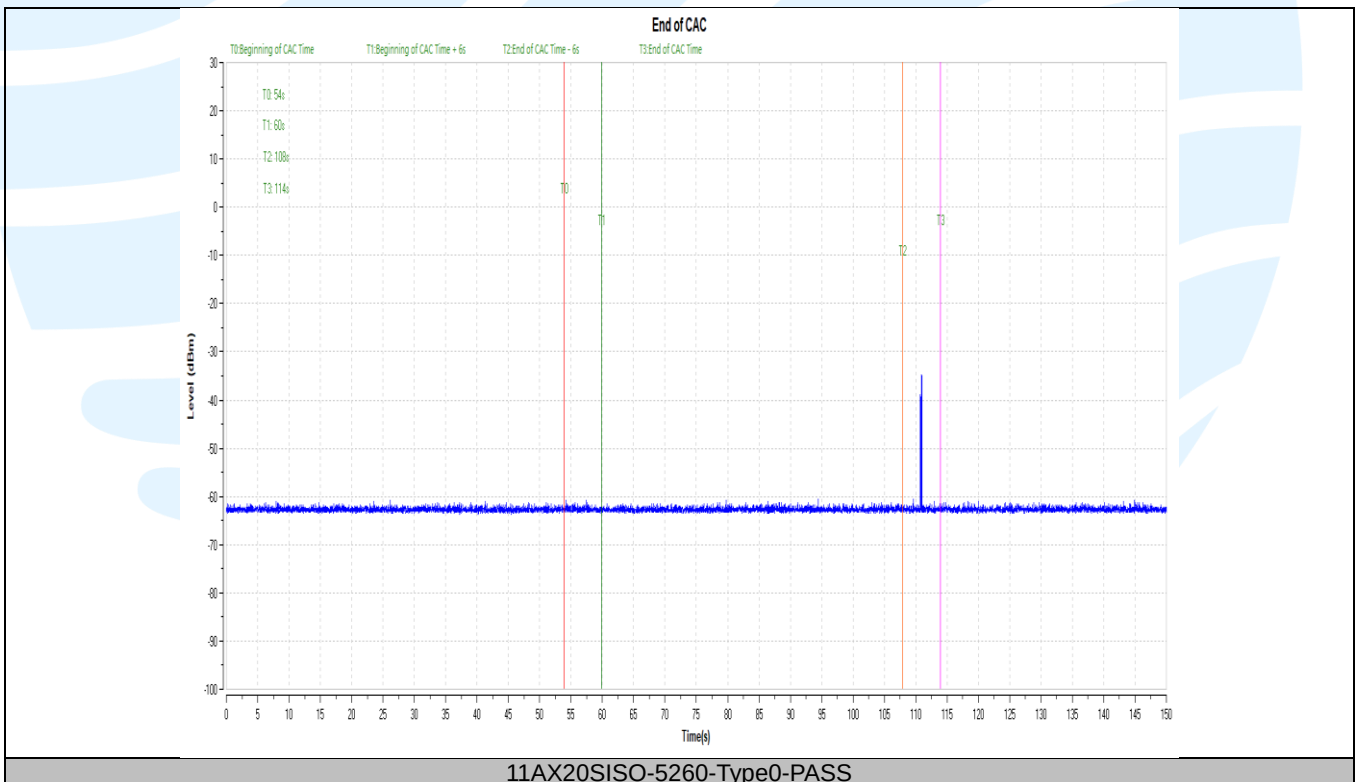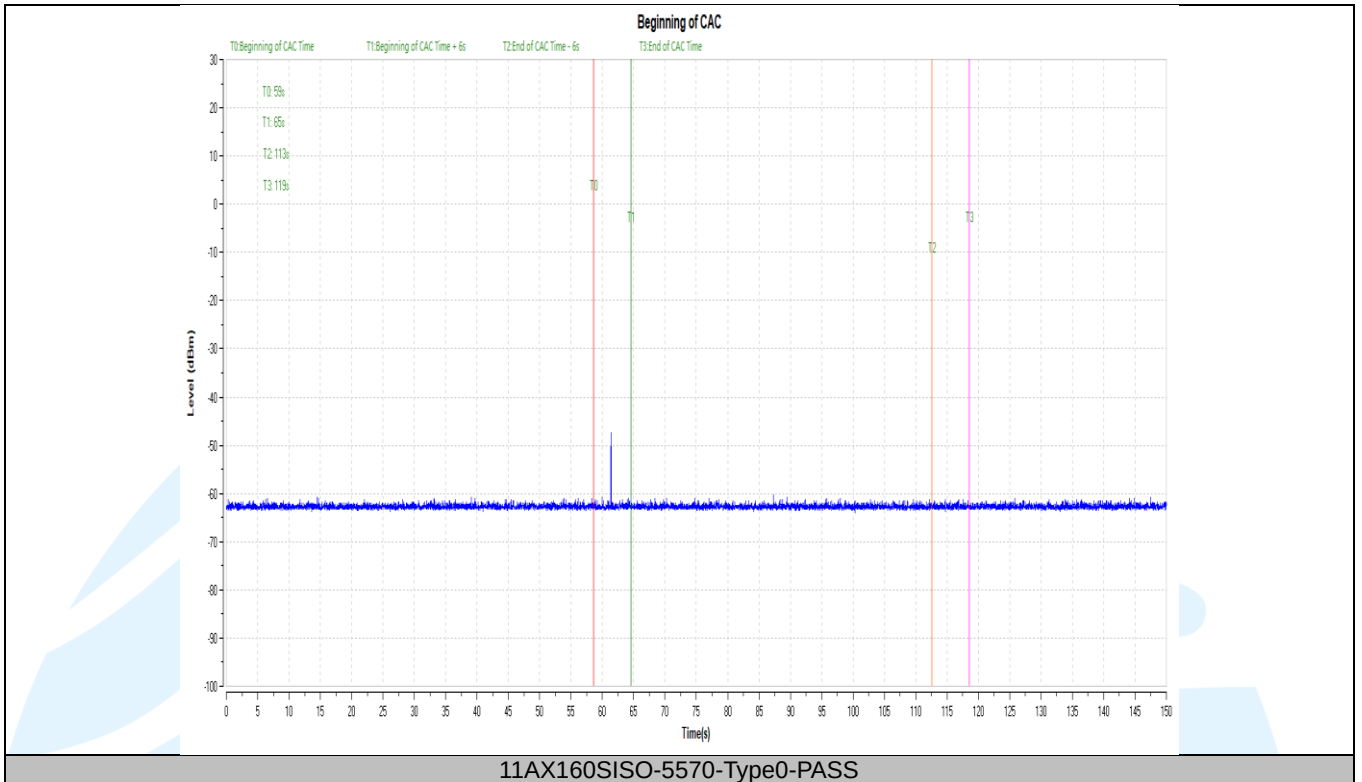

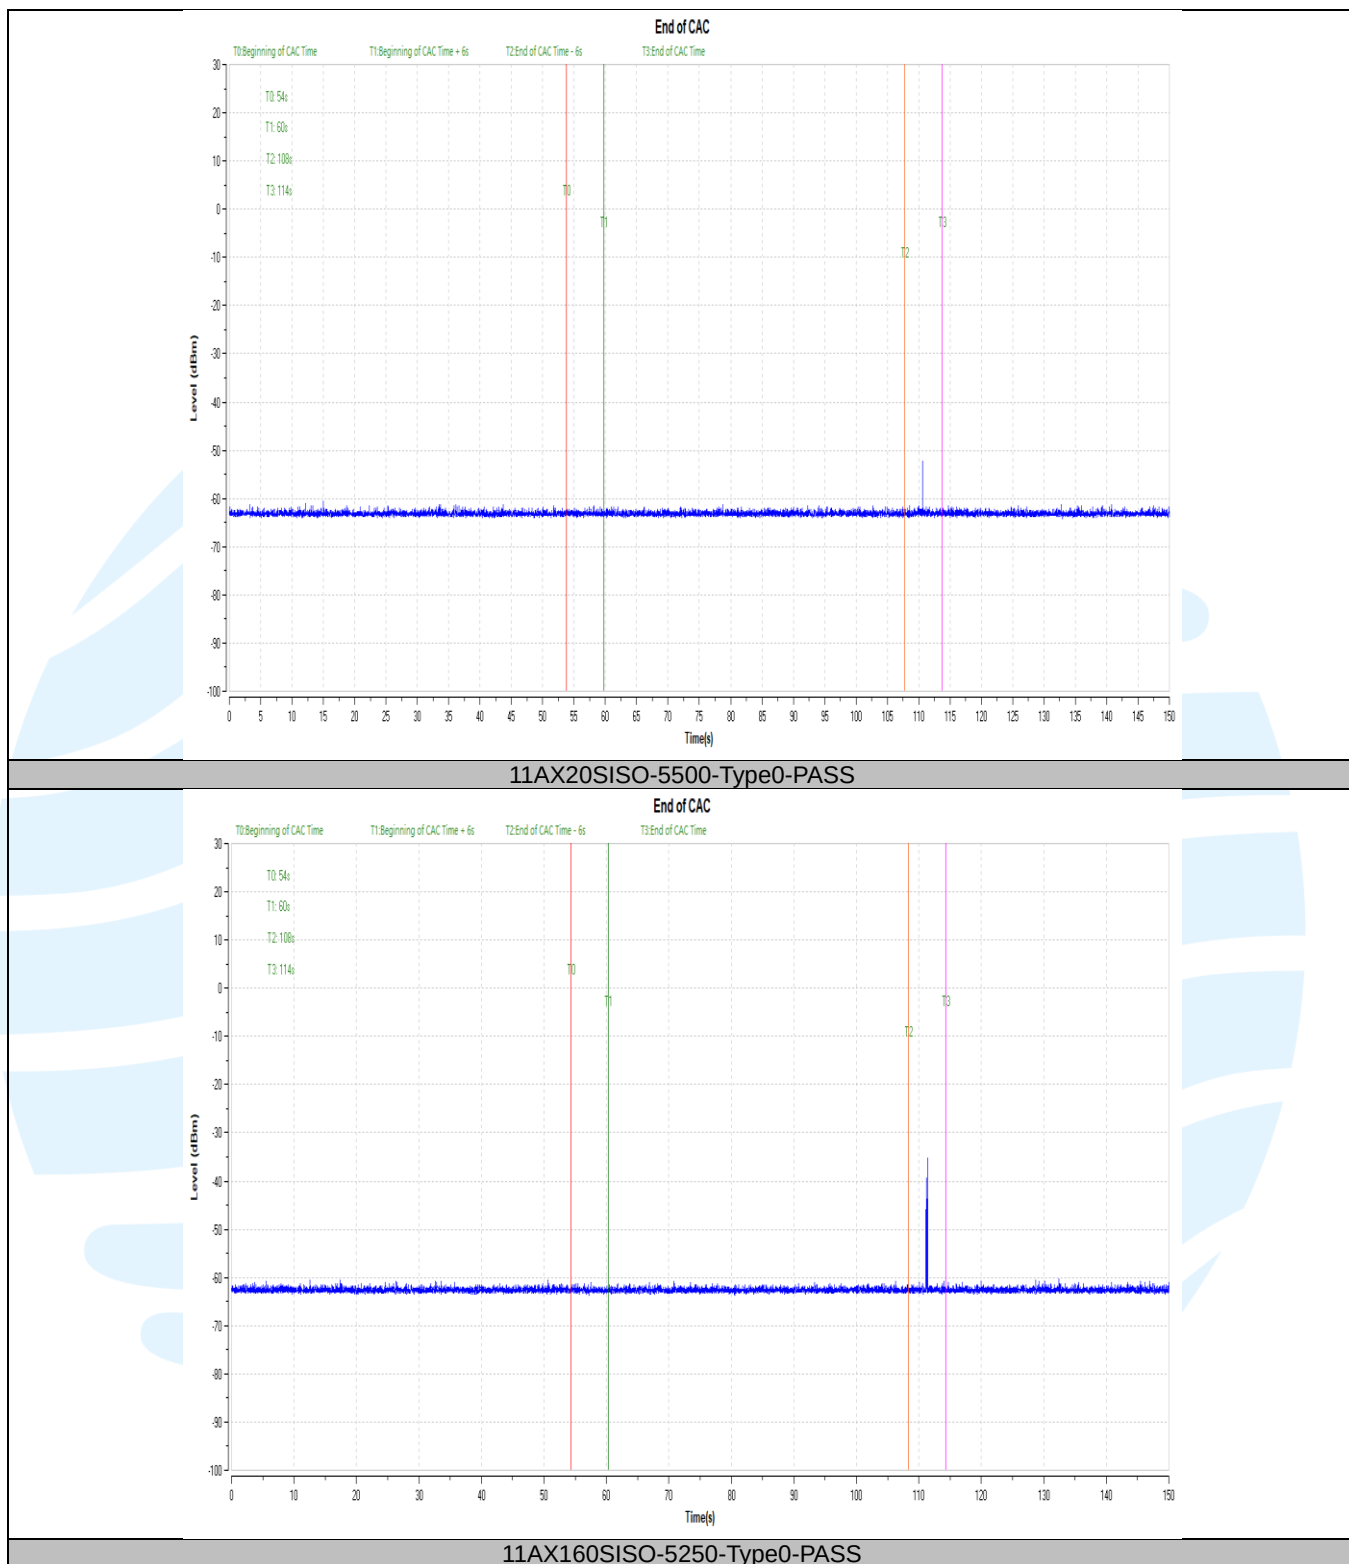

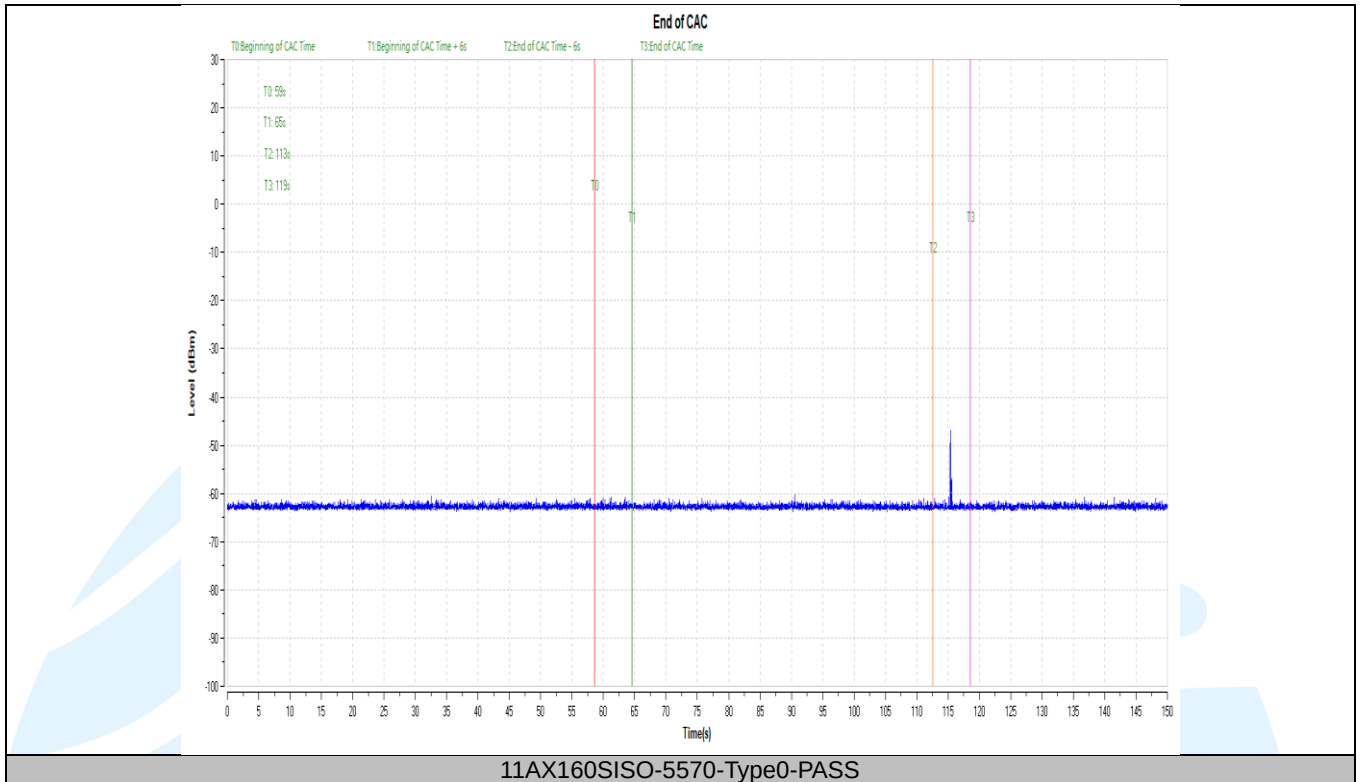

6.4 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD (7.8.3)


6.4.1 Limit of In-Service Monitoring

The EUT has In-Service Monitoring function to continuously monitor the radar signals, If radar is detected, it must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

6.4.2 Test Procedures


- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) Timing plots are reported with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time).
- (5) At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Short Pulse Radar Types 1-4 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.
- (7) (7) When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T_2 to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

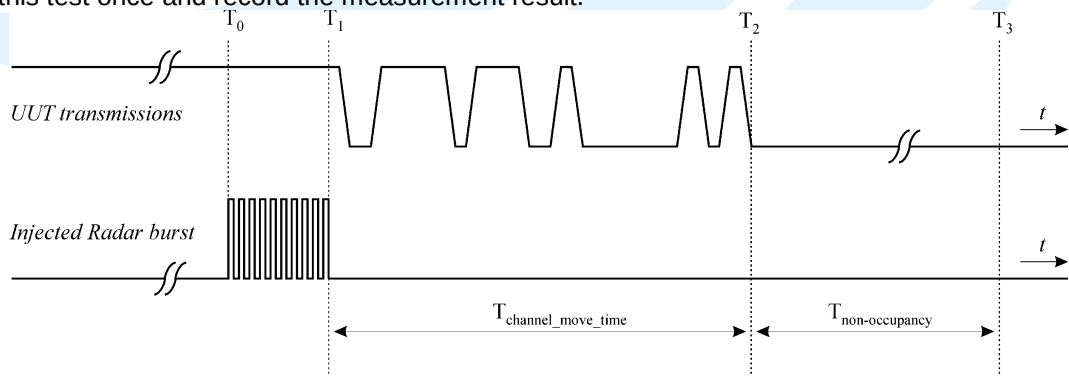

- (8) One 12 seconds plot is reported for the Short Pulse Radar Type 0
- (9) Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $D_{\text{well}} (0.3\text{ms}) = S (12000\text{ms}) / B (40000)$; where D_{well} is the dwell time per spectrum

analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C \text{ (ms)} = N \times \text{Dwell} \text{ (0.3 ms)}$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

6.4.3 Test Setup

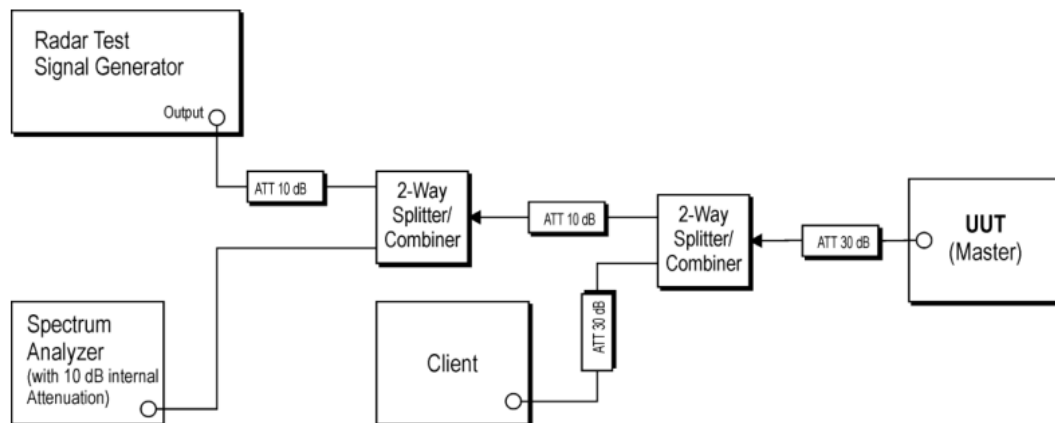


6.4.4 Test Deviation

There is no deviation with the original standard.

6.4.5 Result of Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test

Test Mode	Frequency [MHz]	CCTT [ms]	Limit [ms]	CMT [ms]	Limit [ms]	Verdict
11AX160SISO	5250	200+11.7	200+60	964.6	10000	PASS
11AX160SISO	5570	200+15.6	200+60	985.4	10000	PASS

Test Graphs

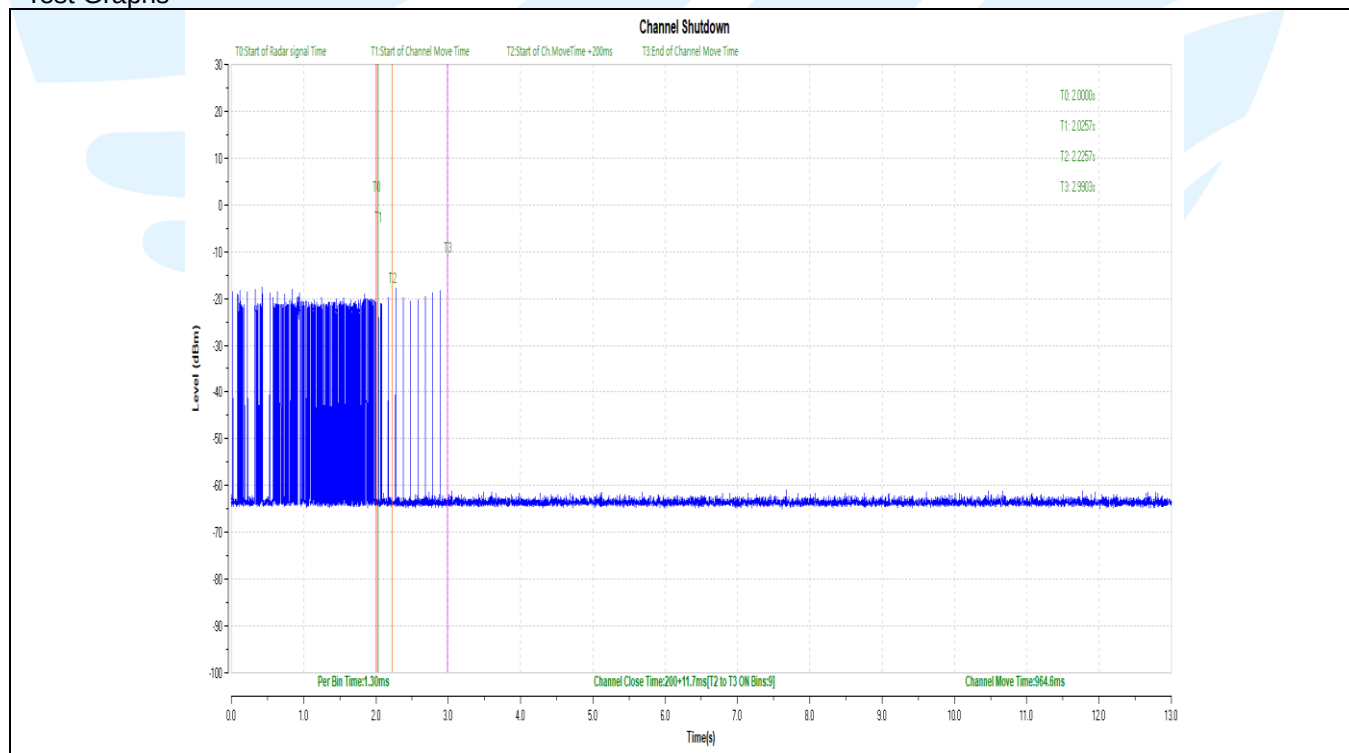

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.407-V1.3

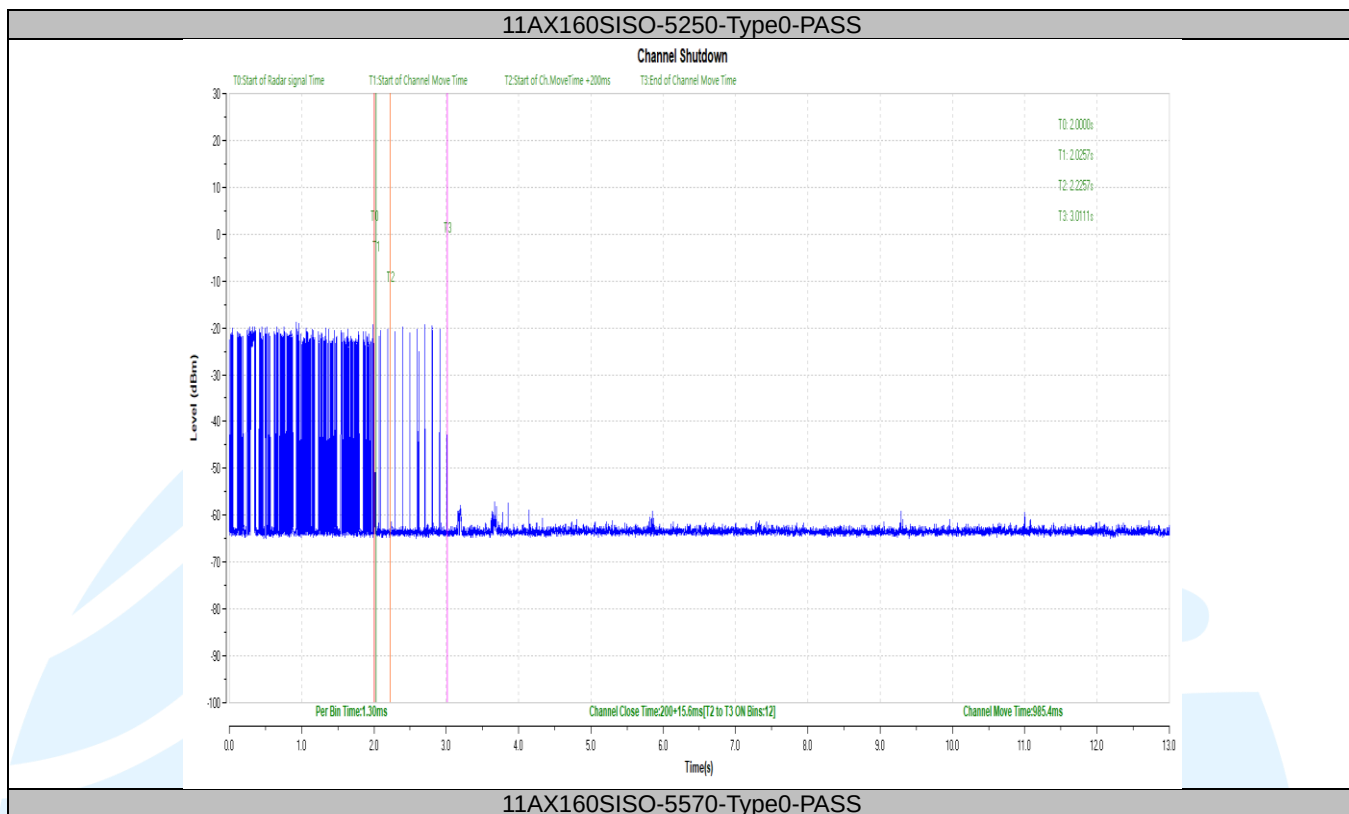


6.4.6 Data Traffic Channel Loading and Noise Floor Plots

Test Mode	Frequency [MHz]	Result	Limit [%]	Verdict
11AX20SISO	5260	30.37	17	PASS
11AX20SISO	5500	29.66	17	PASS
11AX160SISO	5250	25.41	17	PASS
11AX160SISO	5570	27.6	17	PASS

Test Graphs

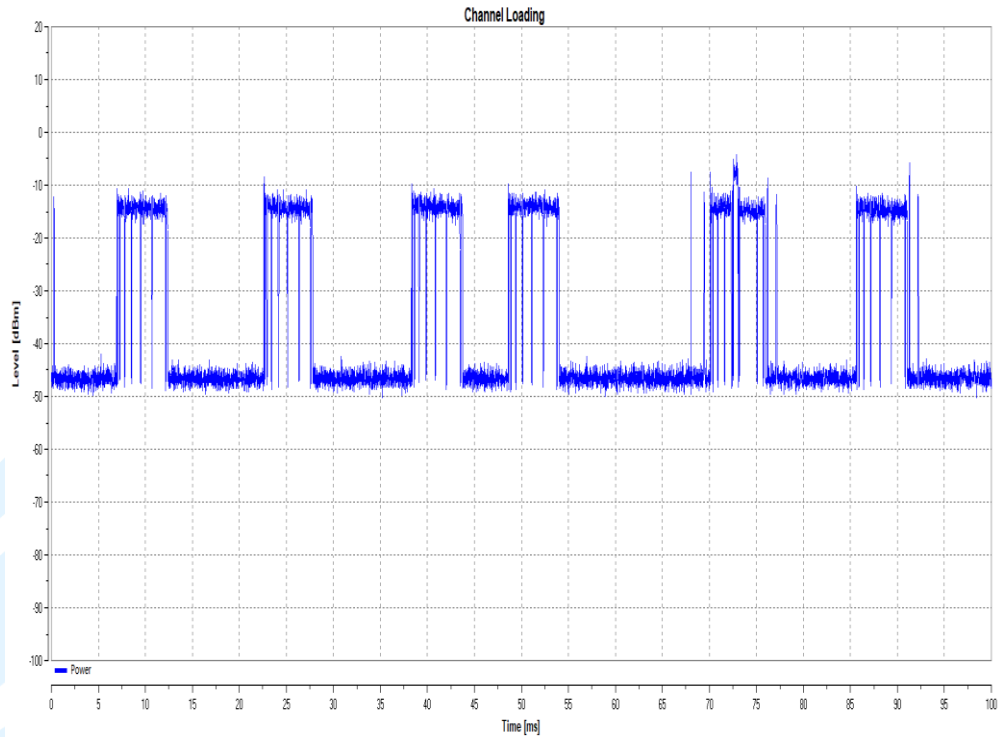

11AX20SISO-5260-PASS

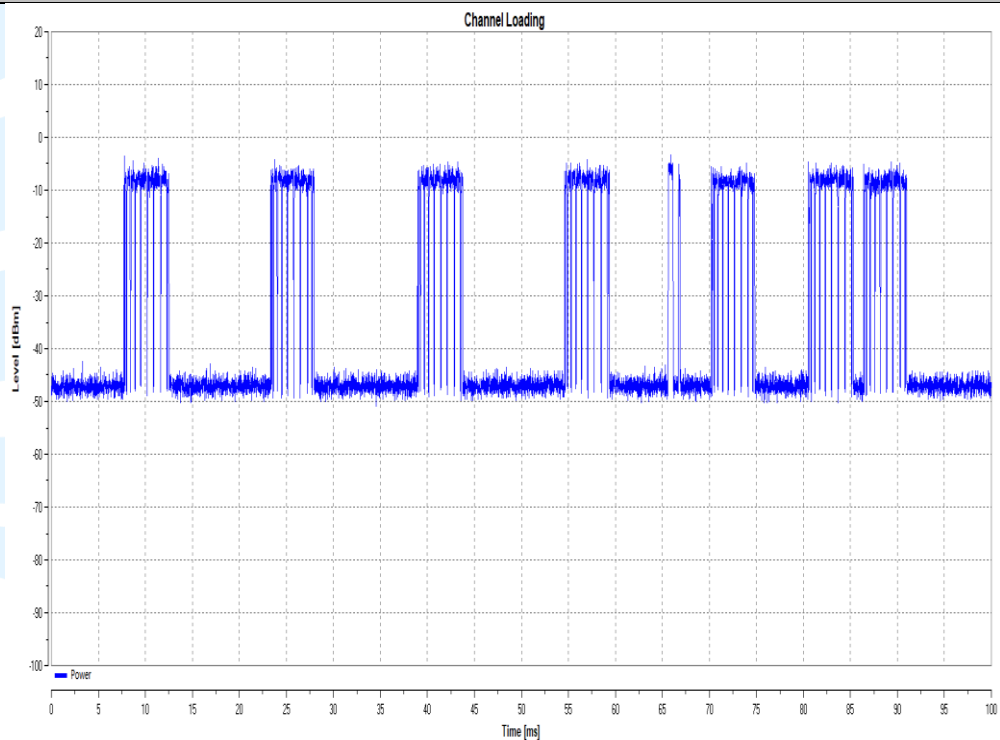

11AX20SISO-5500-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

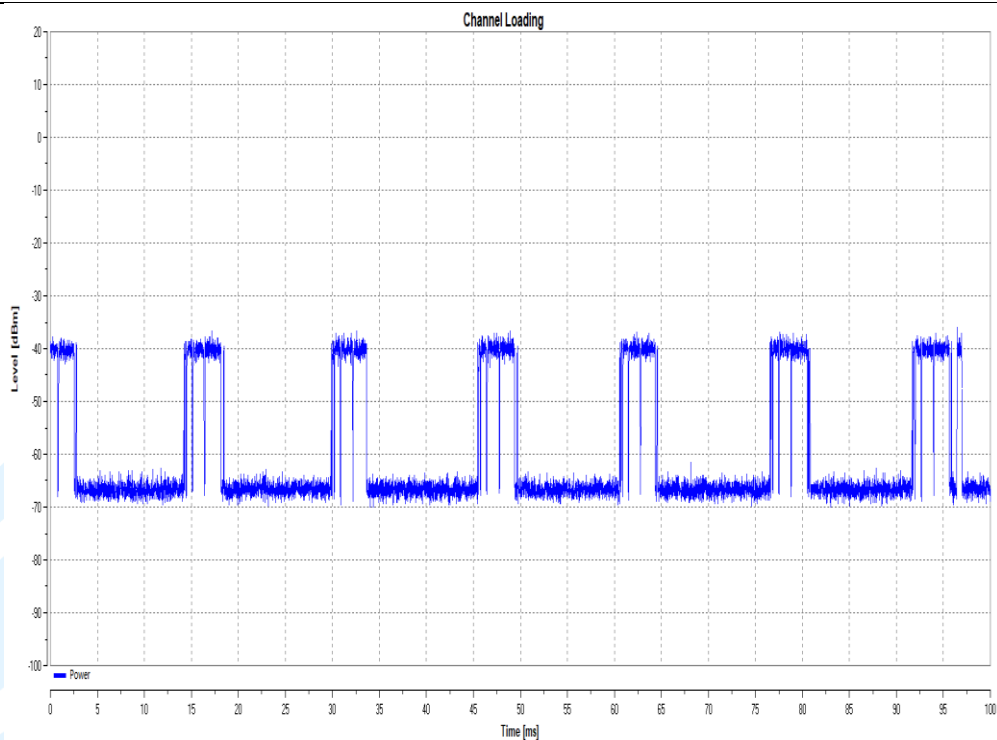


11AX160ISO-5250-PASS

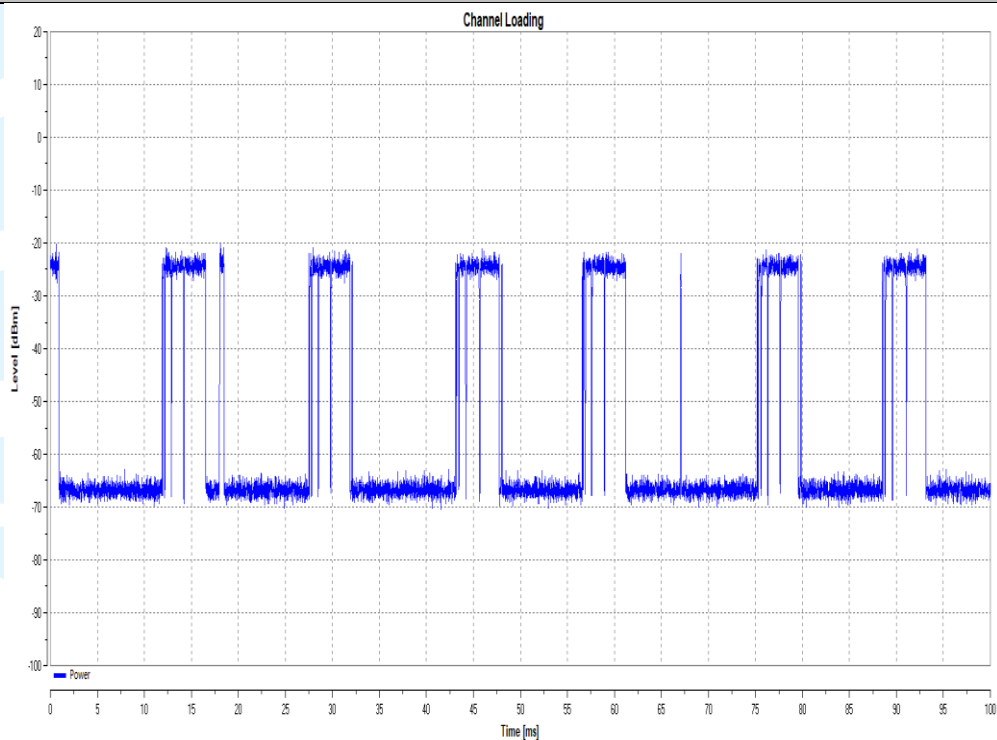

11AX160ISO-5570-PASS

Test Mode	Frequency [MHz]	Result	Limit [s]	Verdict
11AX160SISO	5250	see test graph	≥1800	PASS
11AX160SISO	5570	see test graph	≥1800	PASS

Test Graphs

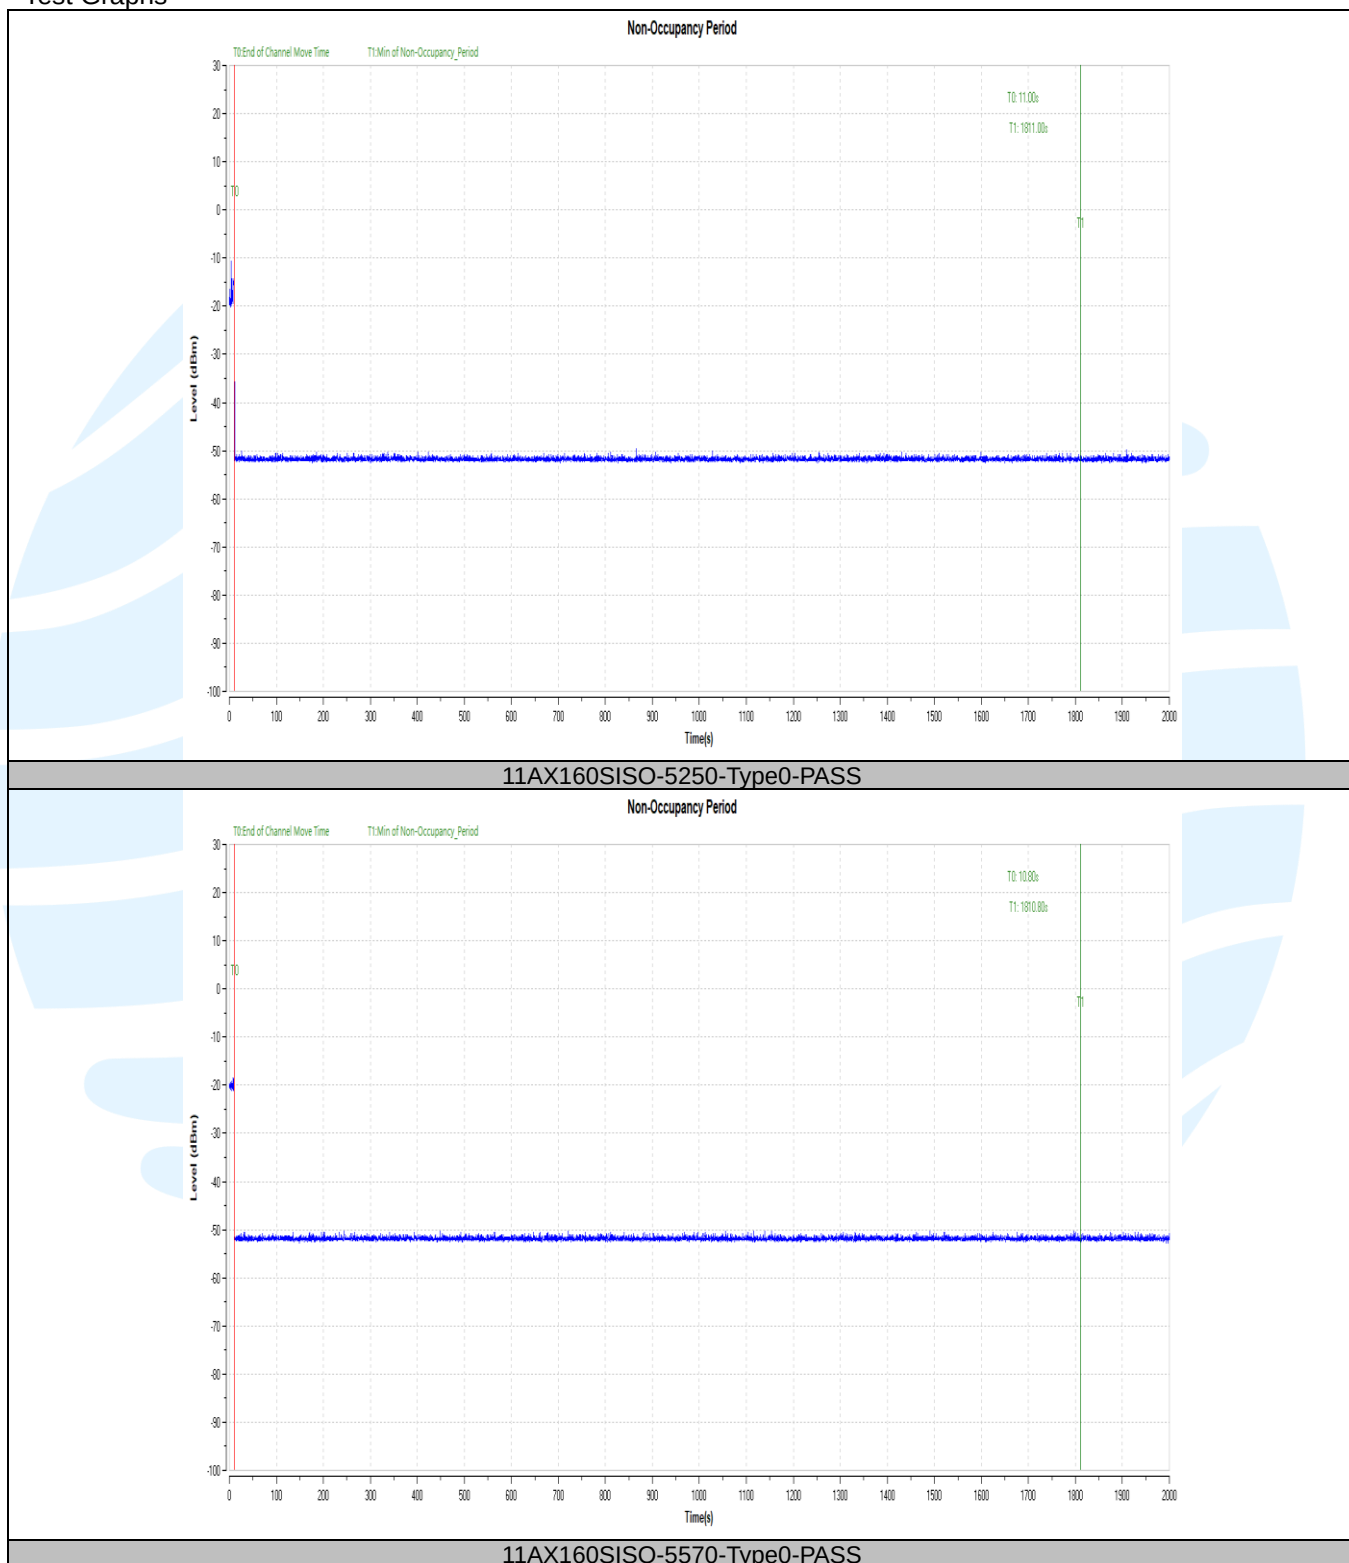

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

6.5 STATISTICAL PERFORMANCE CHECK (7.8.4)

6.5.1 Limit of Statistical Performance Check

Short Pulse Radar Test

Once the performance requirements check is complete, statistical data will be gathered, to determine the ability of the device to detect the radar test waveforms (Short Pulse Radar Types 1-4) found in Table 5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials. The percentage of successful detection is calculated by:

$$\frac{\text{Total Wave form Detections}}{\text{Total Wave form Trials}} \times 100 = \text{Percentage of Successful Detection Radar Waveform } N = P_d N$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

The minimum number of trails, minimum percentage of successful detection and the aggregate minimum percentage of successful detection are found in Table 5.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 1 through 4. For Short Pulse Radar Type 0, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate (82.9% + 60% + 90% + 88%)/4 = 80.2%			

Long Pulse Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Long Pulse Radar Type 5 found in Table 6. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials. The percentage of successful detection is calculated by:

$$\frac{\text{Total Wave form Detections}}{\text{Total Wave form Trials}} \times 100$$

Table 6 –Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Frequency Hopping radar test signal (radar type 6) found in Table 7. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The probability of successful detection is calculated by:

$$\frac{\text{Total Wave form Detections}}{\text{Total Wave form Trials}} \times 100$$

Table 7 –Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

6.5.2 Test Procedures

- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- (2) (In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) At time T0 the Radar Waveform generator sends a Burst of pulses for each of the Radar Types 1-6 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (5) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs.
- (6) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs

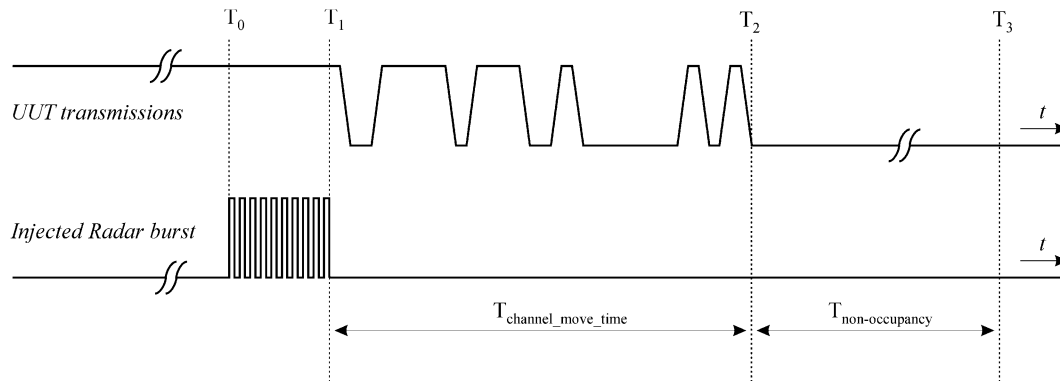

6.5.3 Test Setup

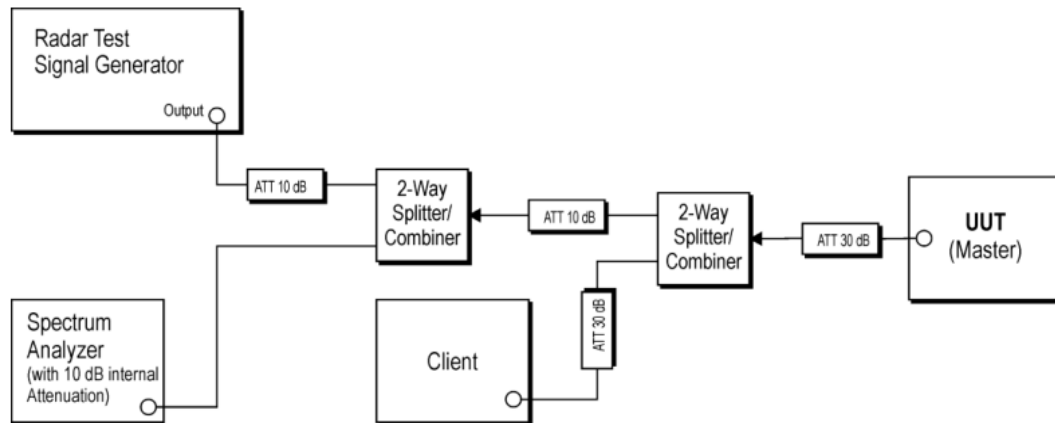

6.5.4 Test Deviation

There is no deviation with the original standard.

6.5.5 Result of Statistical Performance Check

20MHz / 5260MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	N	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	N	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	28/30	30/30	30/30	30/30	30/30
Probability (%)	100%	93.3%	100%	100%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			98.3% (>=80%)			

40MHz / 5270MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	N	Y	Y
3	Y	N	Y	Y	N	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	N	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	N	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	N	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	N	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	28/30	29/30	27/30	29/30	30/30
Probability (%)	100%	93.3%	96.7%	90%	96.7%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				95.0% (>=80%)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

80MHz / 5290MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	N
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	N	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	N	Y	N
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	N	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	N	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	N	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	N
Trial of Detection	30/30	27/30	29/30	29/30	30/30	27/30
Probability (%)	100%	90%	96.7%	96.7%	100%	90%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			95.9% (>=80%)			

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

160MHz / 5250MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	N	Y	Y	Y
6	Y	Y	Y	N	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	N	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	N	N	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	N	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	26/30	28/30	30/30	30/30
Probability (%)	100%	100%	86.7%	93.3%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			95.0% (>=80%)			

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

20MHz / 5500MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	N	N	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	N
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	N	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	N	Y	Y	Y	Y	N
15	Y	Y	N	Y	Y	Y
16	Y	Y	Y	N	Y	Y
17	Y	Y	Y	Y	Y	N
18	Y	N	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	N	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	N	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	N
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	29/30	28/30	27/30	27/30	30/30	26/30
Probability (%)	96.7%	93.3%	90%	90%	100%	86.7%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				92.5% (>=80%)		

40MHz / 5510MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	N	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	N	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	N	Y	Y	Y	Y
13	Y	Y	N	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	N	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	N	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	28/30	28/30	27/30	30/30	30/30
Probability (%)	100%	93.3%	93.3%	90%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				94.2% (>=80%)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

80MHz / 5530MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	N	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	N	N	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	N	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	N	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	N	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	N	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	28/30	28/30	28/30	29/30	30/30	30/30
Probability (%)	93.3%	93.3%	93.3%	96.7%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				94.2% (>=80%)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

160MHz / 5570MHz						
(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	N	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	N	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	N	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	N	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	N	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	N	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	N	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	N	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	N	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	27/30	26/30	27/30	30/30	30/30
Probability (%)	100%	90%	86.7%	90%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				91.7% (>=80%)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

6.6 BRIDGE AND/OR MESH MODE

6.6.1 Limit of Bridge and/or Mesh MODE

Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in §15.403(a) must be validated in the DFS test report. Devices operating as relays where they act as master and client must also employ DFS function for the master. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

Test Result: Compliance

Test Mode: Bridge

20MHz / 5260MHz				
(Detection = Y, No Detection = N)				
Trial Number	Type 1	Number of Bursts	Pulse Width(us)	PRI(us)
1	N	57	1	938
2	Y	76	1	698
3	Y	86	1	618
4	Y	99	1	538
5	Y	61	1	878
6	Y	18	1	3066
7	Y	83	1	638
8	Y	58	1	918
9	Y	63	1	838
10	Y	62	1	858
11	Y	67	1	798
12	Y	74	1	718
13	Y	92	1	578
14	Y	89	1	598
15	Y	95	1	558
16	Y	21	1	2536
17	N	55	1	966
18	Y	64	1	827
19	Y	22	1	2501
20	Y	21	1	2595
21	Y	48	1	1114
22	Y	41	1	1302
23	Y	18	1	3045
24	Y	33	1	1624
25	Y	19	1	2878
26	Y	52	1	1027
27	Y	22	1	2485
28	Y	33	1	1600
29	Y	46	1	1172
30	Y	45	1	1177
Trial of Detection		28/30		
Probability (%)		93.3%		
Limit (%)		≥ 60%		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Test Result: Compliance Test Mode: Mesh				
20MHz / 5260MHz				
(Detection = Y, No Detection = N)				
Trial Number	Type 1	Number of Bursts	Pulse Width(us)	PRI(us)
1	Y	57	1	938
2	N	76	1	698
3	Y	86	1	618
4	Y	99	1	538
5	Y	61	1	878
6	Y	18	1	3066
7	Y	83	1	638
8	Y	58	1	918
9	Y	63	1	838
10	Y	62	1	858
11	Y	67	1	798
12	Y	74	1	718
13	Y	92	1	578
14	Y	89	1	598
15	Y	95	1	558
16	Y	21	1	2536
17	Y	55	1	966
18	Y	64	1	827
19	Y	22	1	2501
20	Y	21	1	2595
21	Y	48	1	1114
22	Y	41	1	1302
23	Y	18	1	3045
24	Y	33	1	1624
25	Y	19	1	2878
26	Y	52	1	1027
27	Y	22	1	2485
28	Y	33	1	1600
29	Y	46	1	1172
30	Y	45	1	1177
Trial of Detection		29/30		
Probability (%)		96.7%		
Limit (%)		>= 60%		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

7. RADAR PARAMETERS

Refer to Appendix A-F for RADAR PARAMETERS.

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
