



802.11ac80_5855MHz_Ant 0

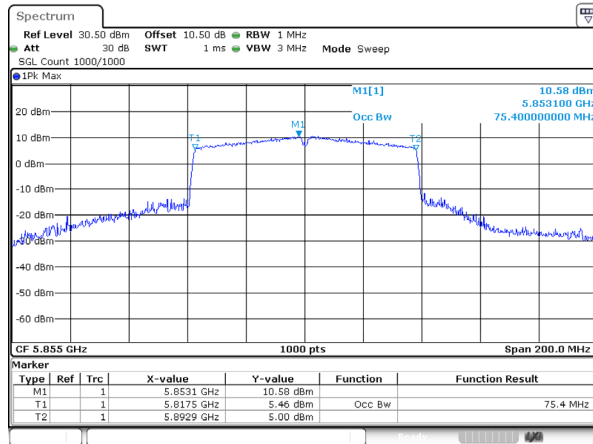


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 20:31:00

802.11ac80_5855MHz_Ant 1

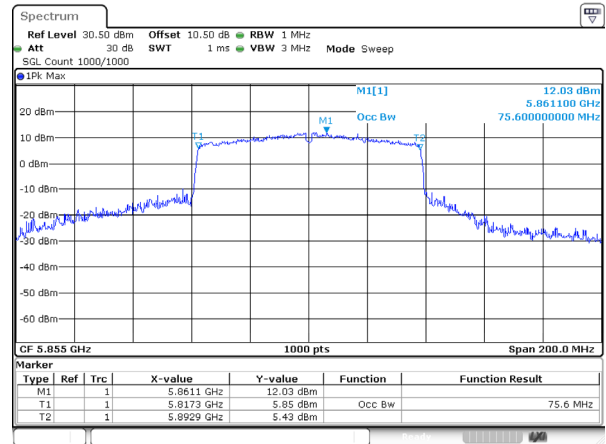


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 20:45:01

802.11ac80_5855MHz_Ant 2

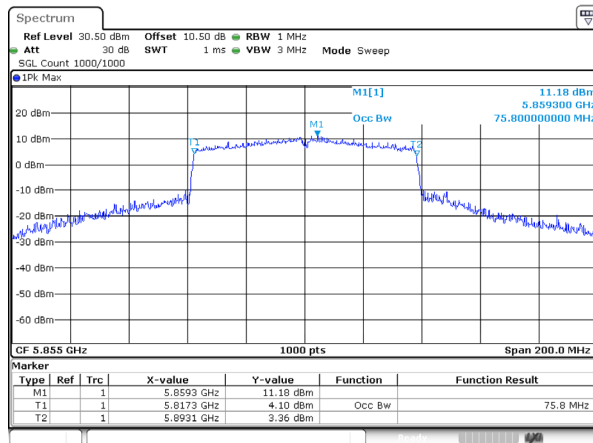


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 21:09:47

802.11ac160_5815MHz_RU_FULL_Ant 0

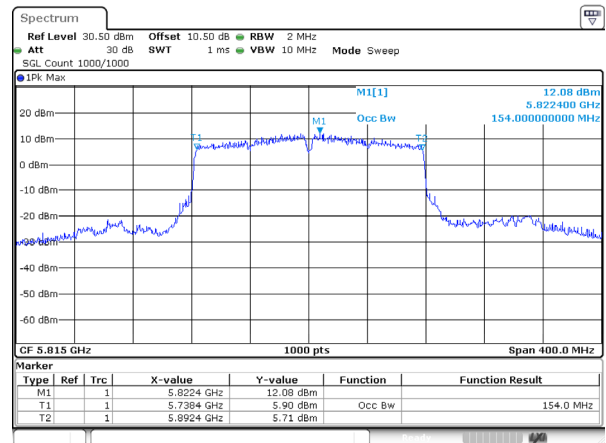


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 02:12:52

802.11ac160_5815MHz_RU_FULL_Ant 1

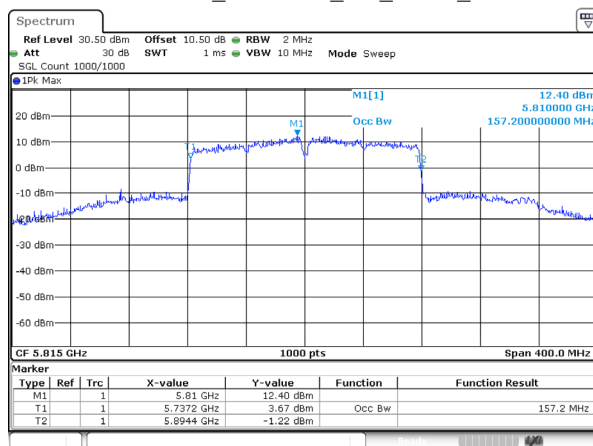


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 02:14:30

802.11ac160_5815MHz_RU_FULL_Ant 2

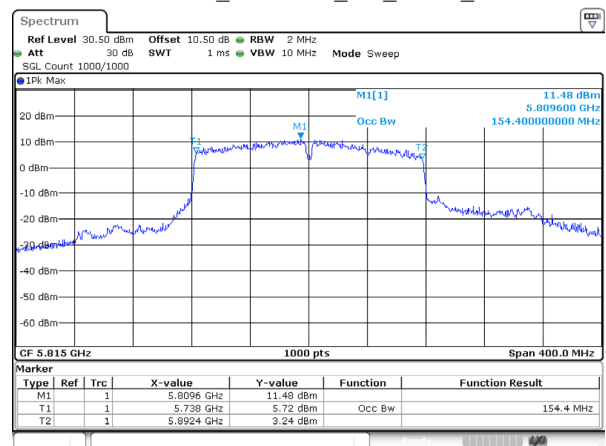


ProjectNo.:2601P12244E-RF Tester:Kungfumaester Liang
Date: 12.FEB.2026 02:15:49

802.11ax20_5845MHz_RU_Full_Ant 0

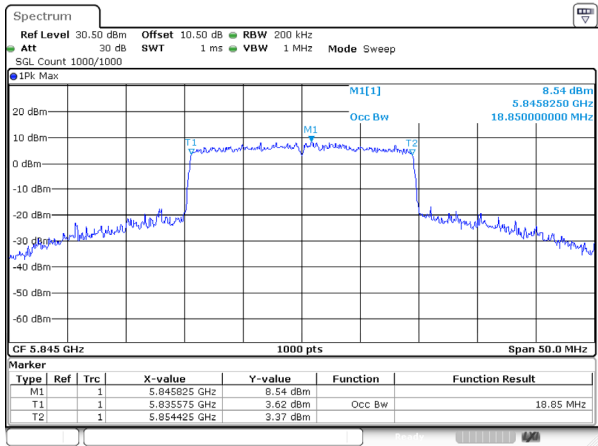


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:19:18

802.11ax20_5865MHz_RU_Full_Ant 0

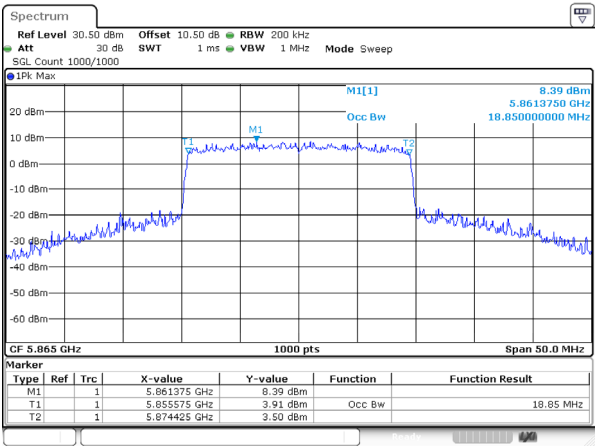


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:21:43

802.11ax20_5885MHz_RU_Full_Ant 0

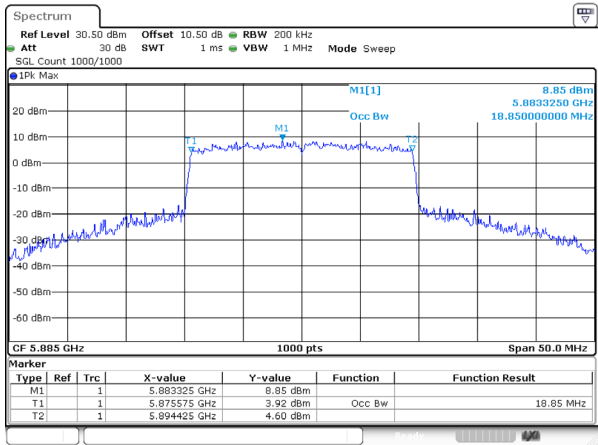


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:23:29

802.11ax20_5845MHz_RU_Full_Ant 1

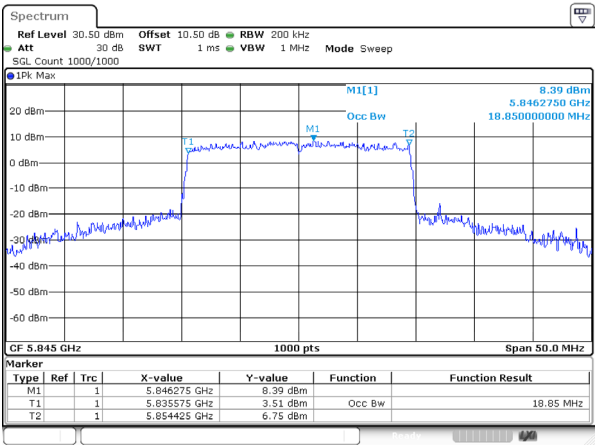


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:13:46

802.11ax20_5865MHz_RU_Full_Ant 1

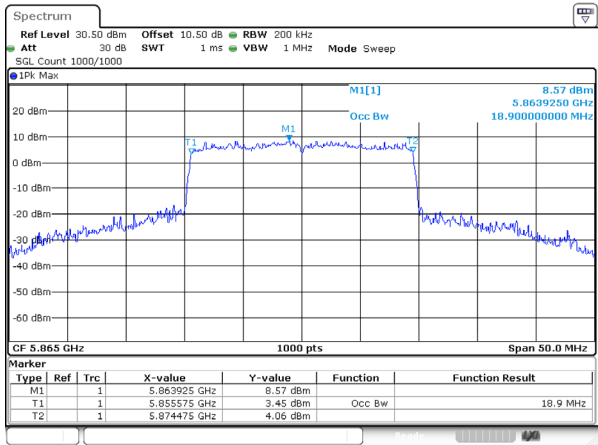


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:15:41

802.11ax20_5885MHz_RU_Full_Ant 1

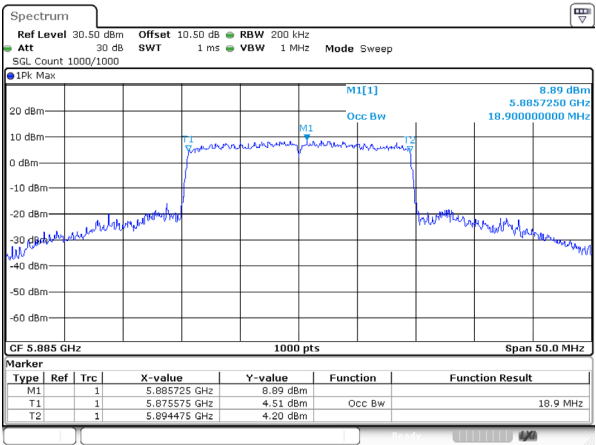


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 04:17:12

802.11ax20_5845MHz_RU_Full_Ant 2

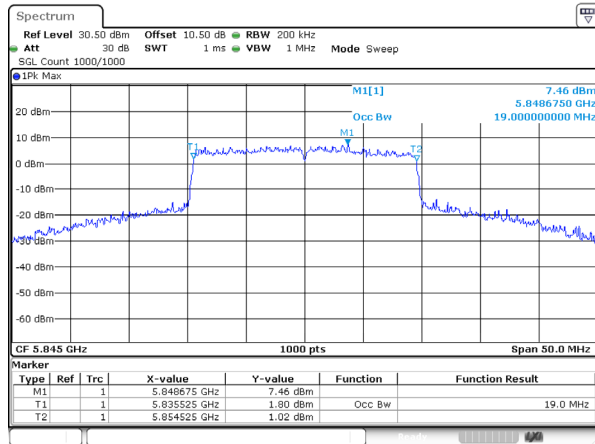


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 04:06:42

802.11ax20_5865MHz_RU_Full_Ant 2

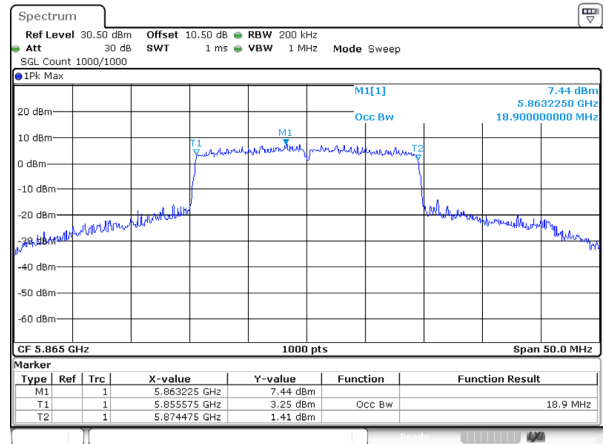


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 04:09:05

802.11ax20_5885MHz_RU_Full_Ant 2

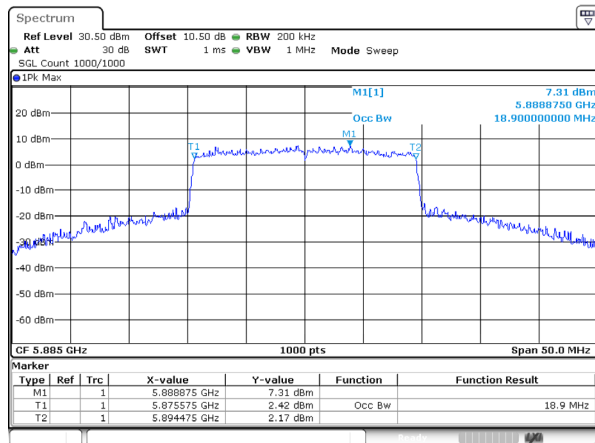


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 04:10:54

802.11ax40_5835MHz_RU_Full_Ant 0

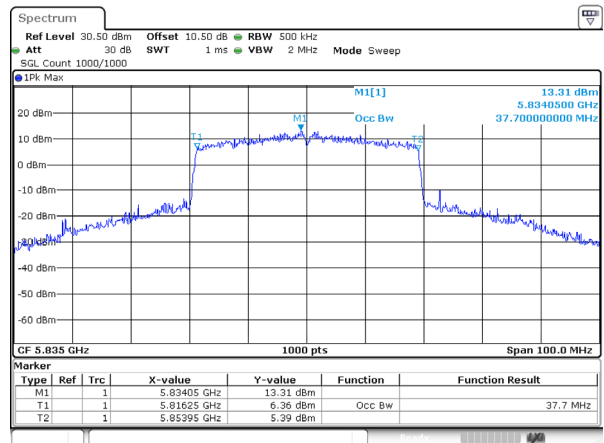


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 02:24:34

802.11ax40_5875MHz_RU_Full_Ant 0

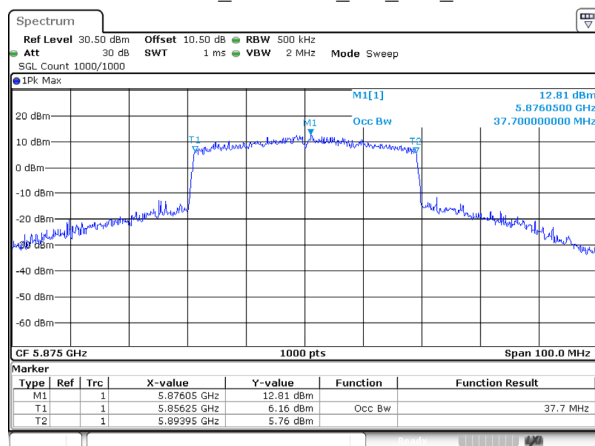


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 02:25:46

802.11ax40_5835MHz_RU_Full_Ant 1

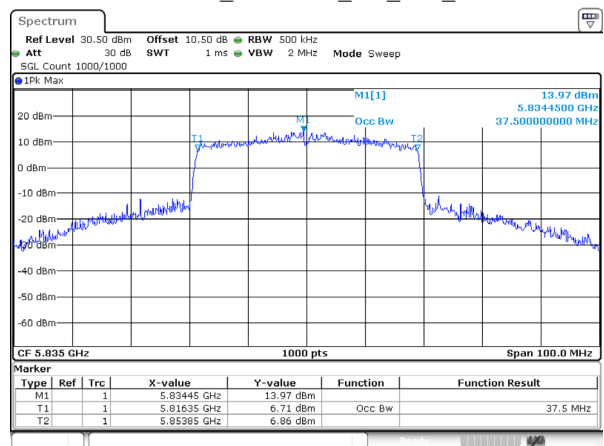


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 02:33:50

802.11ax40_5875MHz_RU_Full_Ant 1

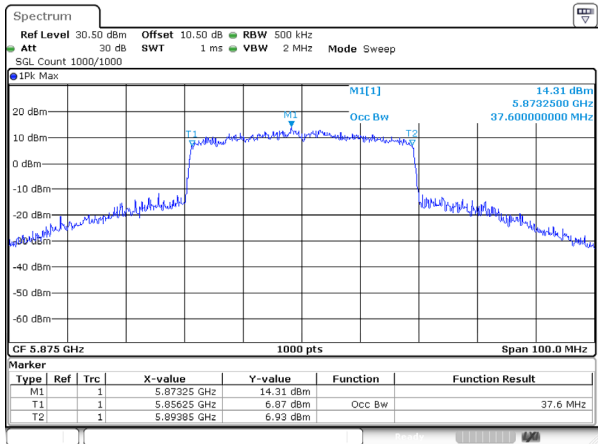


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:34:46

802.11ax40_5835MHz_RU_Full_Ant 2

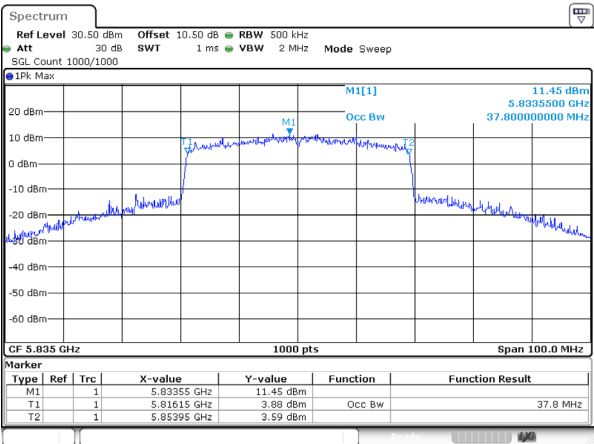


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:42:10

802.11ax40_5875MHz_RU_Full_Ant 2

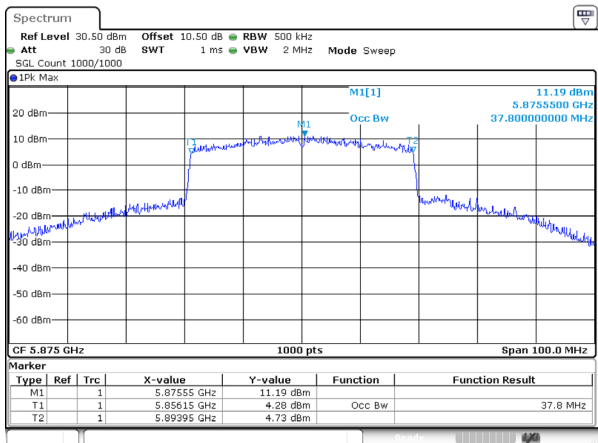


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:43:06

802.11ax80_5855MHz_RU_Full_Ant 0

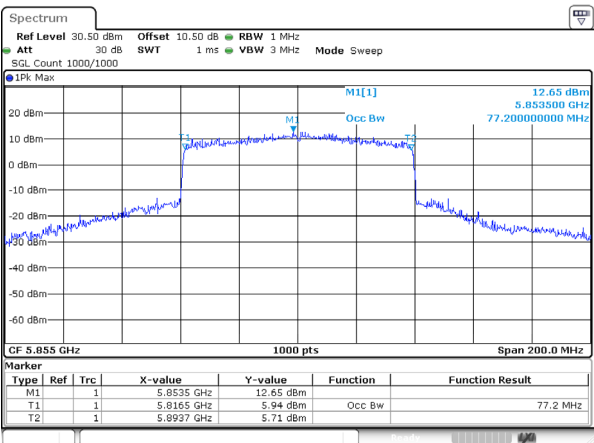


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:27:10

802.11ax80_5855MHz_RU_Full_Ant 1

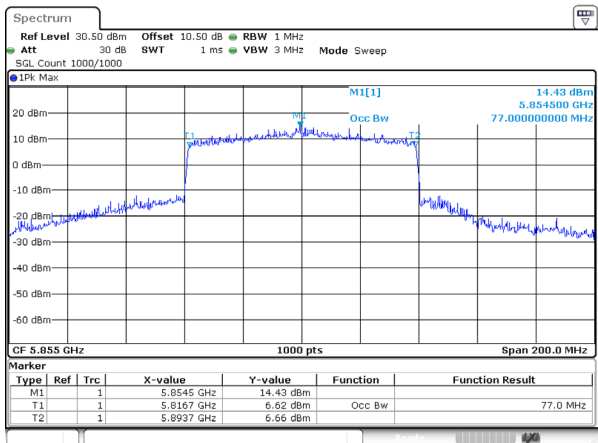


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:35:57

802.11ax80_5855MHz_RU_Full_Ant 2

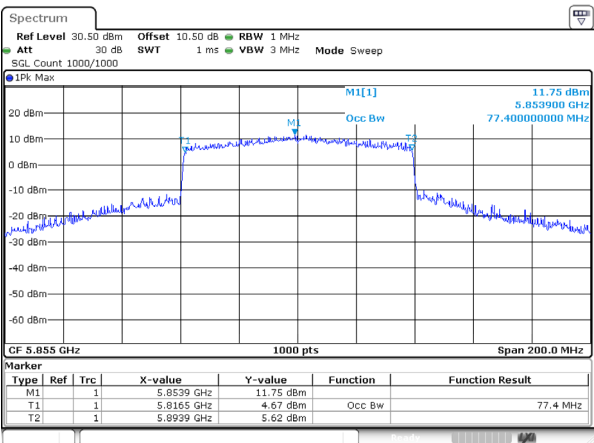


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 12.FEB.2026 02:44:18

802.11ax160_5815MHz_RU_FULL_Ant 0

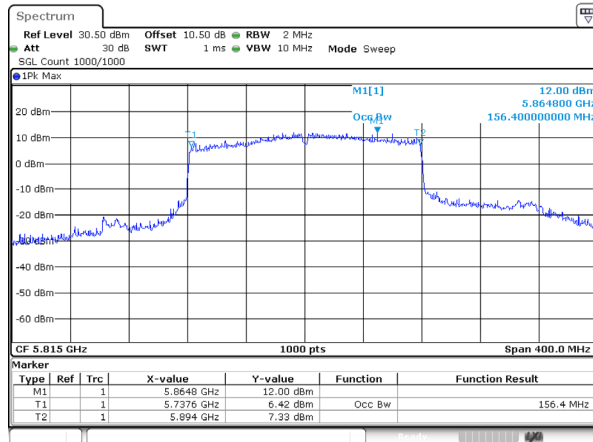


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 02:49:10

802.11ax160_5815MHz_RU_FULL_Ant 1

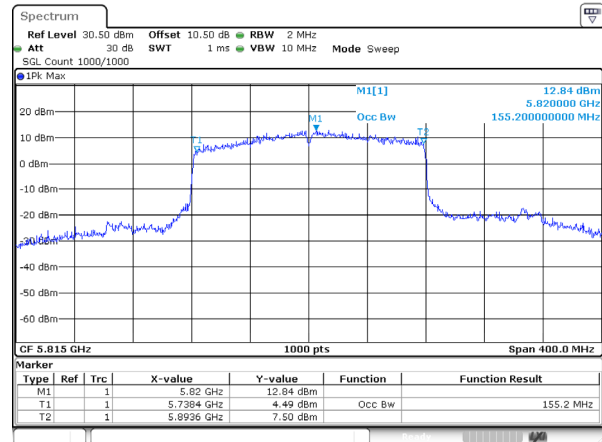


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 02:47:38

802.11ax160_5815MHz_RU_FULL_Ant 2

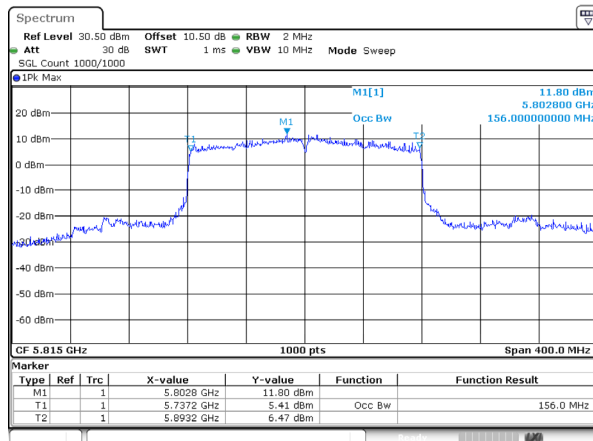


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 12.FEB.2026 02:46:05

802.11be20_5845MHz_RU_Full_Ant 0

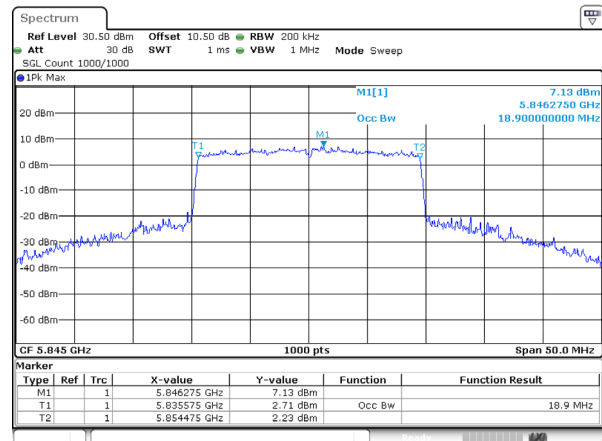


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 28.FEB.2026 22:57:55

802.11be20_5865MHz_RU_Full_Ant 0

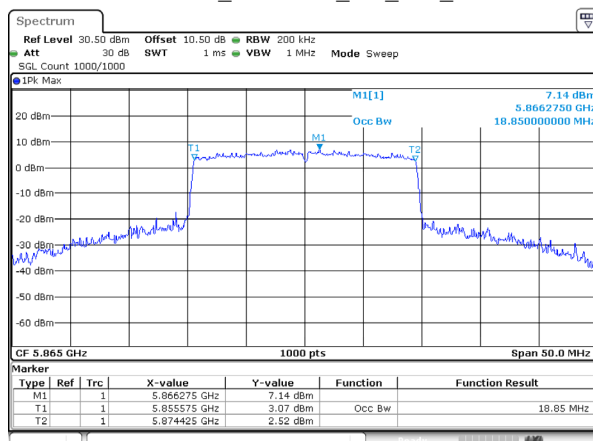


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 28.FEB.2026 23:00:13

802.11be20_5885MHz_RU_Full_Ant 0

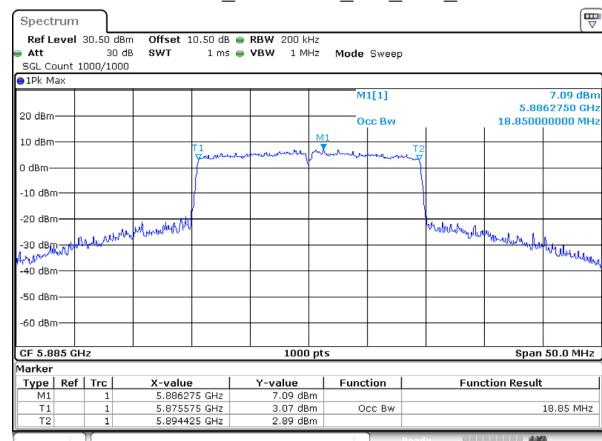


ProjectNo.:2601P12244E-RF Tester:Kungfumaister Liang
Date: 28.FEB.2026 23:02:28

802.11be20_5845MHz_RU_Full_Ant 1

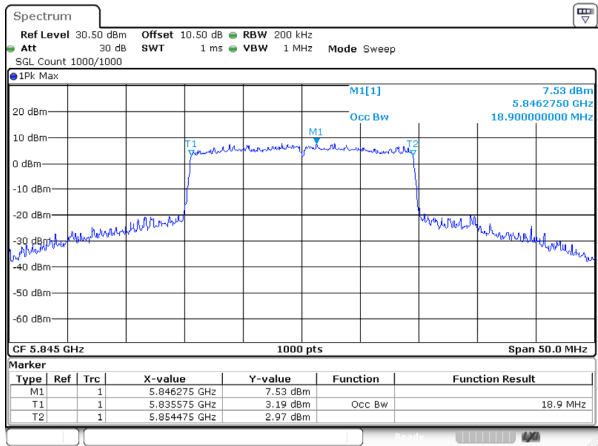


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:42:54

802.11be20_5865MHz_RU_Full_Ant 1

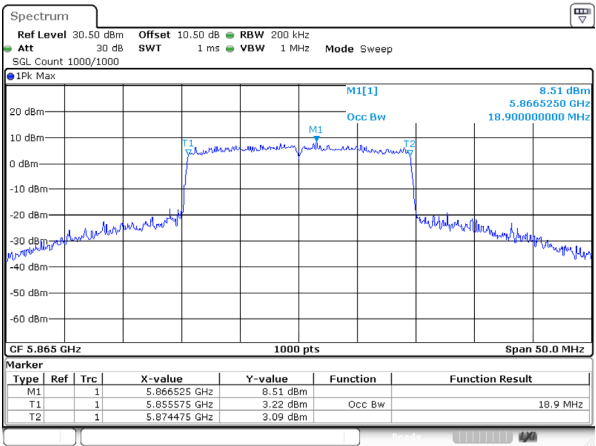


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:45:05

802.11be20_5885MHz_RU_Full_Ant 1

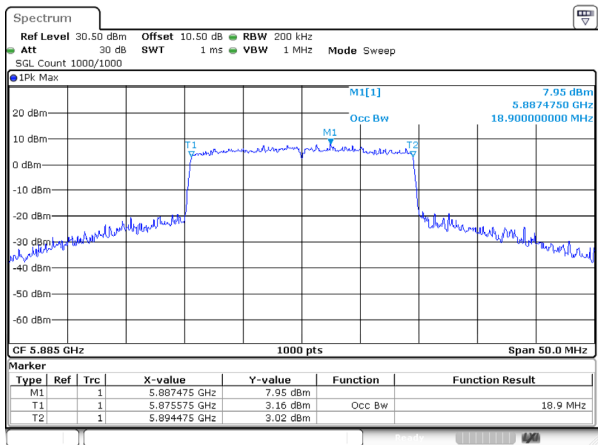


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:47:19

802.11be20_5845MHz_RU_Full_Ant 2

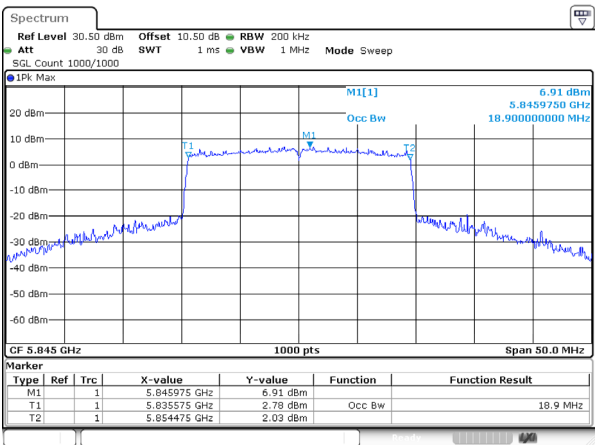


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:13:57

802.11be20_5865MHz_RU_Full_Ant 2

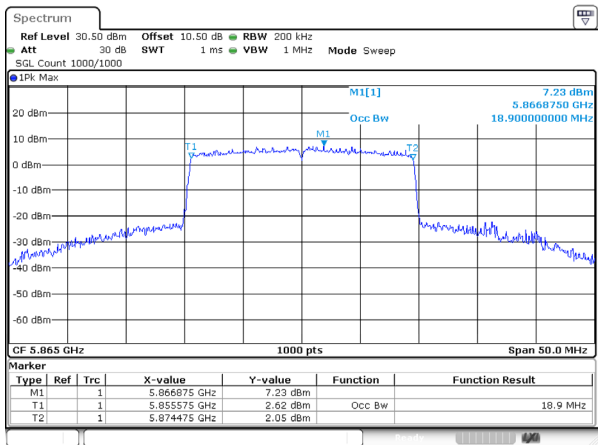


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:20:16

802.11be20_5885MHz_RU_Full_Ant 2

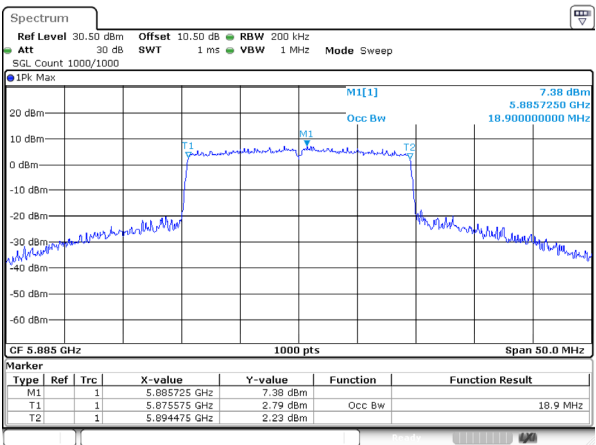


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 28.FEB.2026 22:23:29

802.11be40_5835MHz_RU_Full_Ant 0

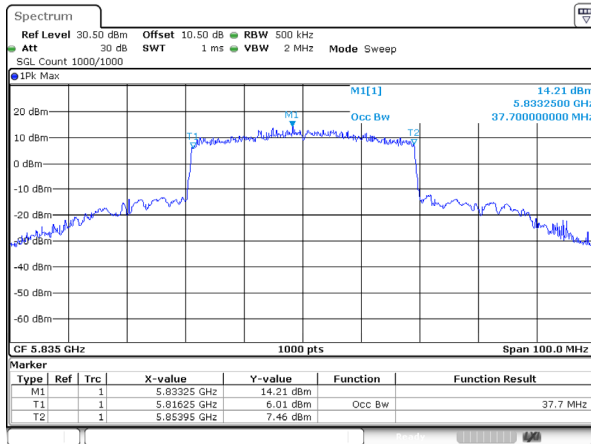


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 23:07:32

802.11be40_5875MHz_RU_Full_Ant 0

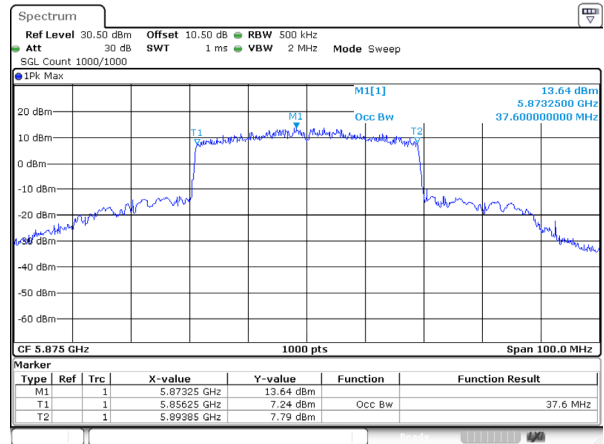


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 23:09:13

802.11be40_5835MHz_RU_Full_Ant 1

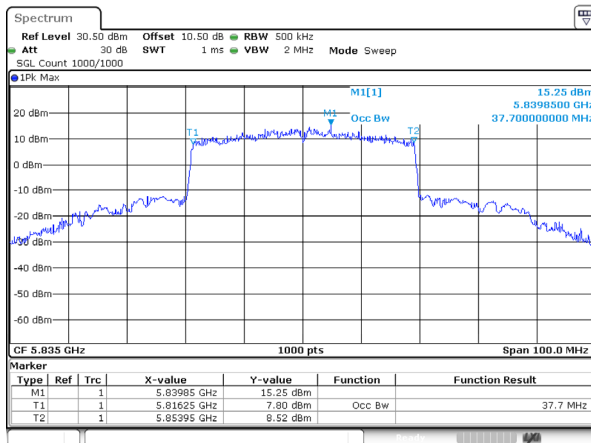


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 22:49:00

802.11be40_5875MHz_RU_Full_Ant 1

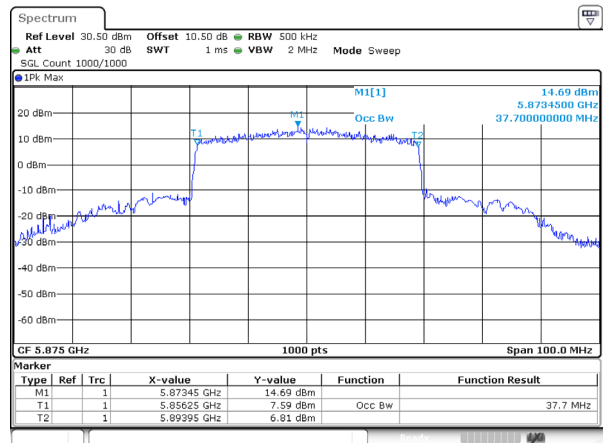


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 22:50:30

802.11be40_5835MHz_RU_Full_Ant 2

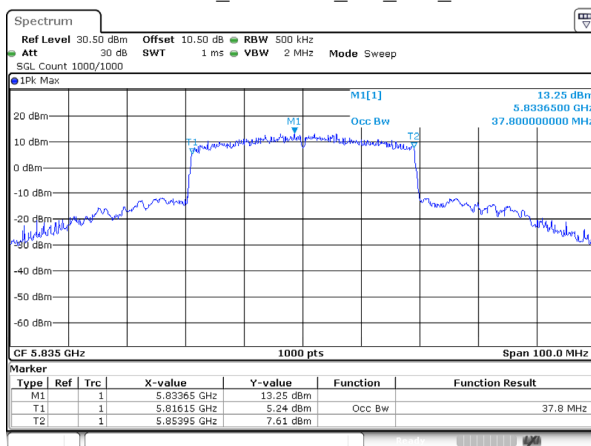


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 22:25:01

802.11be40_5875MHz_RU_Full_Ant 2

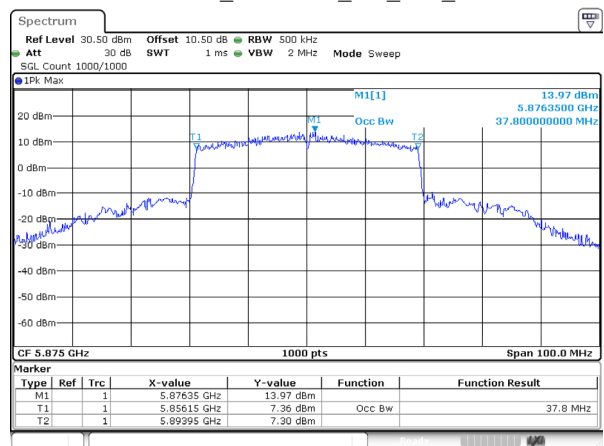


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 28.FEB.2026 22:29:33

802.11be80_5855MHz_RU_Full_Ant 0

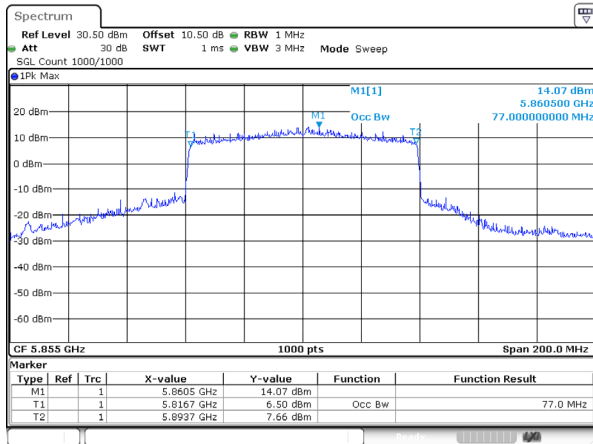


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 23:10:58

802.11be80_5855MHz_RU_Full_Ant 1

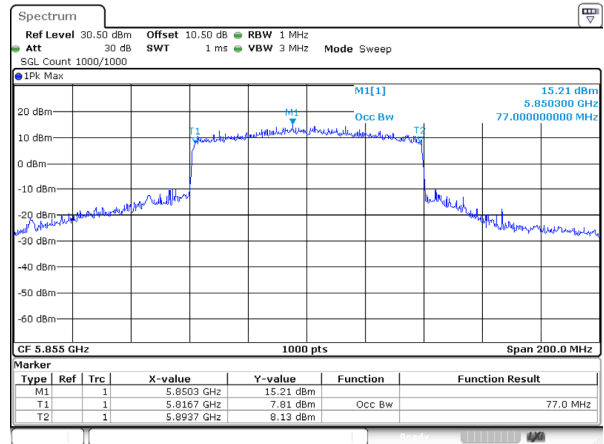


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 22:52:22

802.11be80_5855MHz_RU_Full_Ant 2

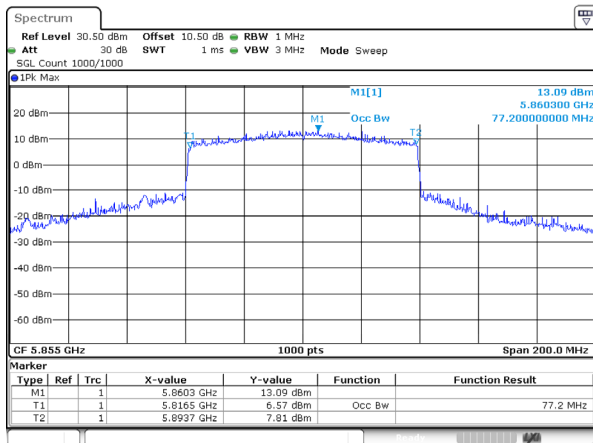


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 22:32:05

802.11be160_5815MHz_RU_FULL_Ant 0

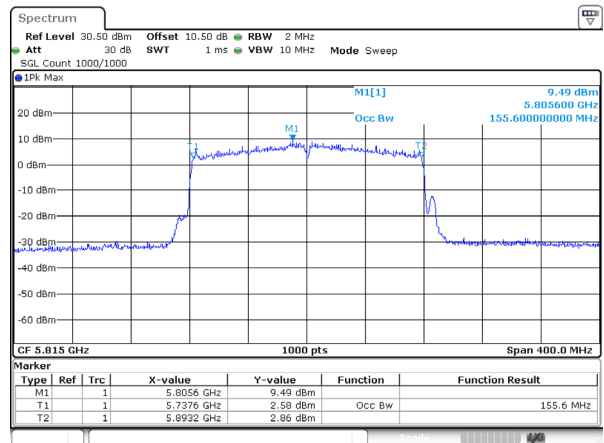


ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 23:13:11

802.11be160_5815MHz_RU_FULL_Ant 1

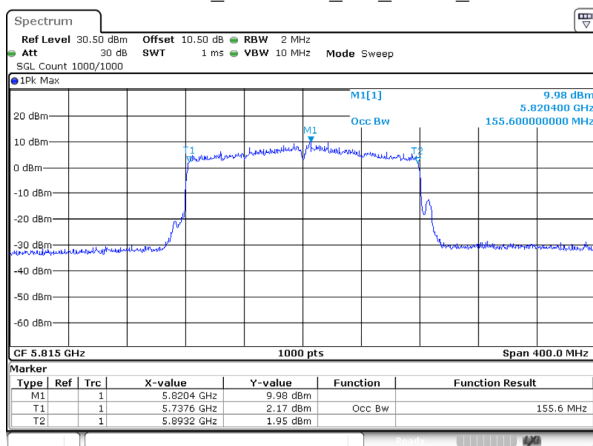

ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 22:54:57

802.11be160_5815MHz_RU_FULL_Ant 2

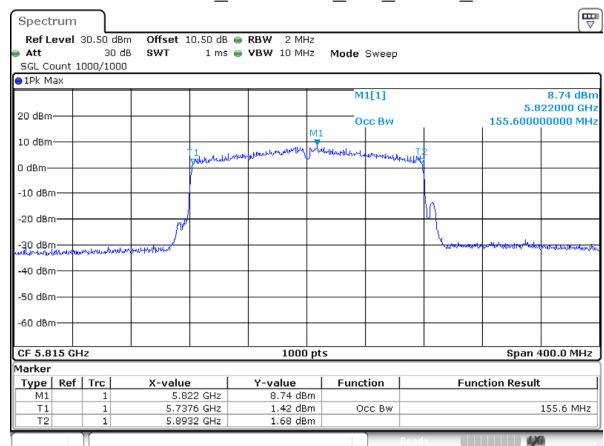

ProjectNo.:2601P12244E-RF Tester:Kungfumaater Liang
Date: 28.FEB.2026 22:36:47

Maximum Conducted Output Power**Test Information:**

Sample No.:	3GAV-5	Test Date:	2026/02/10~2026/03/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.7-25.2	Relative Humidity: (%)	50-52	ATM Pressure: (kPa)	101.2-101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Data:**5.9G**

Mode	Antenna	Test Frequency (MHz)	Average Output Power(dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
802.11a	Ant 0	5845	20.42	5.73	26.15	36	Pass
		5865	20.45	5.73	26.18	36	Pass
		5885	20.35	5.73	26.08	36	Pass
	Ant 1	5845	21.06	5.85	26.91	36	Pass
		5865	21.13	5.85	26.98	36	Pass
		5885	20.95	5.85	26.80	36	Pass
	Ant 2	5845	19.24	5.48	24.72	36	Pass
		5865	19.32	5.48	24.80	36	Pass
		5885	19.32	5.48	24.80	36	Pass
802.11ac20	Ant 0	5845	16.40	5.73	22.13	36	Pass
		5865	16.38	5.73	22.11	36	Pass
		5885	16.38	5.73	22.11	36	Pass
	Ant 1	5845	17.00	5.85	22.85	36	Pass
		5865	17.02	5.85	22.87	36	Pass
		5885	17.08	5.85	22.93	36	Pass
	Ant 2	5845	15.67	5.48	21.15	36	Pass
		5865	15.67	5.48	21.15	36	Pass
		5885	15.73	5.48	21.21	36	Pass
	Total	5845	21.16	10.46	31.62	36	Pass
		5865	21.16	10.46	31.62	36	Pass
		5885	21.20	10.46	31.66	36	Pass
802.11ac40	Ant 0	5835	18.48	5.73	24.21	36	Pass
		5875	17.86	5.73	23.59	36	Pass
	Ant 1	5835	18.34	5.85	24.19	36	Pass
		5875	18.08	5.85	23.93	36	Pass
	Ant 2	5835	18.47	5.48	23.95	36	Pass
		5875	17.83	5.48	23.31	36	Pass
	Total	5835	23.20	10.46	33.66	36	Pass
		5875	22.70	10.46	33.16	36	Pass
802.11ac80	Ant 0	5855	18.76	5.73	24.49	36	Pass
	Ant 1	5855	19.3	5.85	25.15	36	Pass

Mode	Antenna	Test Frequency (MHz)	Average Output Power(dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
802.11ac80	Ant 2	5855	17.85	5.48	23.33	36	Pass
	Total	5855	23.45	10.46	33.91	36	Pass
802.11ac160_RU_FULL	Ant 0	5815	18.21	5.73	23.94	36	Pass
	Ant 1	5815	18.39	5.85	24.24	36	Pass
	Ant 2	5815	17.0	5.48	22.48	36	Pass
	Total	5815	22.68	10.46	33.14	36	Pass
802.11ax20_RU_Full	Ant 0	5845	16.38	5.73	22.11	36	Pass
		5865	16.40	5.73	22.13	36	Pass
		5885	16.51	5.73	22.24	36	Pass
	Ant 1	5845	17.03	5.85	22.88	36	Pass
		5865	17.01	5.85	22.86	36	Pass
		5885	17.13	5.85	22.98	36	Pass
	Ant 2	5845	15.48	5.48	20.96	36	Pass
		5865	15.45	5.48	20.93	36	Pass
		5885	15.62	5.48	21.10	36	Pass
	Total	5845	21.11	10.46	31.57	36	Pass
		5865	21.10	10.46	31.56	36	Pass
		5885	21.23	10.46	31.69	36	Pass
802.11ax40_RU_Full	Ant 0	5835	18.01	5.73	23.74	36	Pass
		5875	18.03	5.73	23.76	36	Pass
	Ant 1	5835	18.02	5.85	23.87	36	Pass
		5875	18.08	5.85	23.93	36	Pass
	Ant 2	5835	18.51	5.48	23.99	36	Pass
		5875	18.74	5.48	24.22	36	Pass
	Total	5835	22.96	10.46	33.42	36	Pass
		5875	23.07	10.46	33.53	36	Pass
802.11ax80_RU_Full	Ant 0	5855	18.86	5.73	24.59	36	Pass
	Ant 1	5855	19.63	5.85	25.48	36	Pass
	Ant 2	5855	17.76	5.48	23.24	36	Pass
	Total	5855	23.59	10.46	34.05	36	Pass
802.11ax160_RU_FULL	Ant 0	5815	18.13	5.73	23.86	36	Pass

Mode	Antenna	Test Frequency (MHz)	Average Output Power(dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
802.11ax160_RU_FULL	Ant 1	5815	18.53	5.85	24.38	36	Pass
	Ant 2	5815	17.01	5.48	22.49	36	Pass
	Total	5815	22.71	10.46	33.17	36	Pass
802.11be20_RU_Full	Ant 0	5845	15.83	5.73	21.56	36	Pass
		5865	15.83	5.73	21.56	36	Pass
		5885	15.84	5.73	21.57	36	Pass
	Ant 1	5845	16.21	5.85	22.06	36	Pass
		5865	16.22	5.85	22.07	36	Pass
		5885	16.21	5.85	22.06	36	Pass
	Ant 2	5845	15.76	5.48	21.24	36	Pass
		5865	15.79	5.48	21.27	36	Pass
		5885	15.78	5.48	21.26	36	Pass
	Total	5845	20.71	10.46	31.17	36	Pass
		5865	20.72	10.46	31.18	36	Pass
		5885	20.72	10.46	31.18	36	Pass
802.11be40_RU_Full	Ant 0	5835	18.98	5.73	24.71	36	Pass
		5875	18.98	5.73	24.71	36	Pass
	Ant 1	5835	19.33	5.85	25.18	36	Pass
		5875	19.50	5.85	25.35	36	Pass
	Ant 2	5835	18.71	5.48	24.19	36	Pass
		5875	18.72	5.48	24.20	36	Pass
	Total	5835	23.79	10.46	34.25	36	Pass
		5875	23.85	10.46	34.31	36	Pass
802.11be80_RU_Full	Ant 0	5855	20.1	5.73	25.83	36	Pass
	Ant 1	5855	20.51	5.85	26.36	36	Pass
	Ant 2	5855	19.74	5.48	25.22	36	Pass
	Total	5855	24.90	10.46	35.36	36	Pass
802.11be160_RU_FULL	Ant 0	5815	19.02	5.73	24.75	36	Pass
	Ant 1	5815	18.87	5.85	24.72	36	Pass
	Ant 2	5815	18.2	5.48	23.68	36	Pass
	Total	5815	23.48	10.46	33.94	36	Pass

Note:**Average Output Power = Reading + Duty Factor****EIRP = Average Output Power + Antenna gain****Duty Factor refer to the Duty Cycle.**

Note: For 802.11ac/ax/be modes, the device support beam-forming function, per KDB 662911 D01 Multiple Transmitter Output v02r01:

$$\bullet \quad DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k_{th} antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k_{th} antenna.

Ant 0	Antenna Gain	5.73	dBi	Directional Gain:	10.46	dBi
Ant 1	Antenna Gain	5.85	dBi			
Ant 2	Antenna Gain	5.48	dBi			

Power Spectral Density**Test Information:**

Sample No.:	3GAV-5	Test Date:	2026/02/10~2026/05/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.7-25.2	Relative Humidity: (%)	50-52	ATM Pressure: (kPa)	101.2-101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Data:**5.9G**

Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor(dB)	Antenna Gain(dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	Ant 0	5845	6.61	3.19	5.73	15.53	20	Pass
		5865	6.80	3.19	5.73	15.72	20	Pass
		5885	6.60	3.19	5.73	15.52	20	Pass
	Ant 1	5845	7.58	3.19	5.85	16.62	20	Pass
		5865	7.51	3.19	5.85	16.55	20	Pass
		5885	7.33	3.19	5.85	16.37	20	Pass
	Ant 2	5845	5.62	3.19	5.48	14.29	20	Pass
		5865	5.54	3.19	5.48	14.21	20	Pass
		5885	5.49	3.19	5.48	14.16	20	Pass
802.11ac20	Ant 0	5845	0.87	3.17	5.73	9.77	20	Pass
		5865	0.85	3.17	5.73	9.75	20	Pass
		5885	1.09	3.17	5.73	9.99	20	Pass
	Ant 1	5845	0.66	3.17	5.85	9.68	20	Pass
		5865	0.76	3.17	5.85	9.78	20	Pass
		5885	0.92	3.17	5.85	9.94	20	Pass
	Ant 2	5845	0.94	3.17	5.48	9.59	20	Pass
		5865	0.83	3.17	5.48	9.48	20	Pass
		5885	0.70	3.17	5.48	9.35	20	Pass
	Total	5845	5.60	3.17	10.46	19.23	20	Pass
		5865	5.58	3.17	10.46	19.21	20	Pass
		5885	5.68	3.17	10.46	19.31	20	Pass
802.11ac40	Ant 0	5835	1.10	3.34	5.73	10.17	20	Pass
		5875	0.88	3.34	5.73	9.95	20	Pass
	Ant 1	5835	0.72	3.34	5.85	9.91	20	Pass
		5875	0.64	3.34	5.85	9.83	20	Pass
	Ant 2	5835	1.06	3.34	5.48	9.88	20	Pass
		5875	0.77	3.34	5.48	9.59	20	Pass
	Total	5835	5.73	3.34	10.46	19.53	20	Pass
		5875	5.54	3.34	10.46	19.34	20	Pass
802.11ac80	Ant 0	5855	-0.65	3.66	5.73	8.74	20	Pass

Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor(dB)	Antenna Gain(dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11ac80	Ant 1	5855	-0.20	3.66	5.85	9.31	20	Pass
	Ant 2	5855	-1.45	3.66	5.48	7.69	20	Pass
	Total	5855	4.03	3.66	10.46	18.15	20	Pass
802.11ac160 _RU_FULL	Ant 0	5815	-4.40	4.10	5.73	5.43	20	Pass
	Ant 1	5815	-4.67	4.10	5.85	5.28	20	Pass
	Ant 2	5815	-4.99	4.10	5.48	4.59	20	Pass
	Total	5815	0.09	4.10	10.46	14.65	20	Pass
802.11ax20 _RU_Full	Ant 0	5845	0.78	3.79	5.73	10.30	20	Pass
		5865	0.61	3.79	5.73	10.13	20	Pass
		5885	0.74	3.79	5.73	10.26	20	Pass
	Ant 1	5845	0.62	3.79	5.85	10.26	20	Pass
		5865	0.47	3.79	5.85	10.11	20	Pass
		5885	0.66	3.79	5.85	10.30	20	Pass
	Ant 2	5845	0.50	3.79	5.48	9.77	20	Pass
		5865	0.74	3.79	5.48	10.01	20	Pass
		5885	0.50	3.79	5.48	9.77	20	Pass
	Total	5845	5.41	3.79	10.46	19.66	20	Pass
		5865	5.38	3.79	10.46	19.63	20	Pass
		5885	5.41	3.79	10.46	19.66	20	Pass
802.11ax40 _RU_Full	Ant 0	5835	0.68	3.69	5.73	10.10	20	Pass
		5875	0.34	3.69	5.73	9.76	20	Pass
	Ant 1	5835	0.23	3.69	5.85	9.77	20	Pass
		5875	0.50	3.69	5.85	10.04	20	Pass
	Ant 2	5835	0.79	3.69	5.48	9.96	20	Pass
		5875	1.04	3.69	5.48	10.21	20	Pass
	Total	5835	5.34	3.69	10.46	19.49	20	Pass
		5875	5.41	3.69	10.46	19.56	20	Pass
802.11ax80 _RU_Full	Ant 0	5855	-0.77	3.82	5.73	8.78	20	Pass
	Ant 1	5855	0.28	3.82	5.85	9.95	20	Pass
	Ant 2	5855	-1.81	3.82	5.48	7.49	20	Pass
	Total	5855	4.09	3.82	10.46	18.37	20	Pass
802.11ax160 _RU_FULL	Ant 0	5815	-4.21	3.81	5.73	5.33	20	Pass
	Ant 1	5815	-3.50	3.81	5.85	6.16	20	Pass

Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor(dB)	Antenna Gain(dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11ax160_RU_FULL	Ant 2	5815	-5.26	3.81	5.48	4.03	20	Pass
	Total	5815	0.51	3.81	10.46	14.78	20	Pass
802.11be20_RU_Full	Ant 0	5845	0.61	3.68	5.73	10.02	20	Pass
		5865	0.59	3.68	5.73	10.00	20	Pass
		5885	0.64	3.68	5.73	10.05	20	Pass
	Ant 1	5845	0.76	3.68	5.85	10.29	20	Pass
		5865	0.70	3.68	5.85	10.23	20	Pass
		5885	0.72	3.68	5.85	10.25	20	Pass
	Ant 2	5845	0.59	3.68	5.48	9.75	20	Pass
		5865	0.66	3.68	5.48	9.82	20	Pass
		5885	0.46	3.68	5.48	9.62	20	Pass
	Total	5845	5.43	3.68	10.46	19.57	20	Pass
		5865	5.42	3.68	10.46	19.56	20	Pass
		5885	5.38	3.68	10.46	19.52	20	Pass
802.11be40_RU_Full	Ant 0	5835	0.39	3.68	5.73	9.80	20	Pass
		5875	0.59	3.68	5.73	10.00	20	Pass
	Ant 1	5835	0.66	3.68	5.85	10.19	20	Pass
		5875	0.63	3.68	5.85	10.16	20	Pass
	Ant 2	5835	0.53	3.68	5.48	9.69	20	Pass
		5875	0.53	3.68	5.48	9.69	20	Pass
	Total	5835	5.30	3.68	10.46	19.44	20	Pass
		5875	5.35	3.68	10.46	19.49	20	Pass
802.11be80_RU_Full	Ant 0	5855	0.17	3.71	5.73	9.61	20	Pass
	Ant 1	5855	0.98	3.71	5.85	10.54	20	Pass
	Ant 2	5855	-0.18	3.71	5.48	9.01	20	Pass
	Total	5855	5.12	3.71	10.46	19.29	20	Pass
802.11be160_RU_FULL	Ant 0	5815	-3.35	3.70	5.73	6.08	20	Pass
	Ant 1	5815	-3.34	3.70	5.85	6.21	20	Pass
	Ant 2	5815	-3.80	3.70	5.48	5.38	20	Pass
	Total	5815	1.28	3.70	10.46	15.44	20	Pass

Note:**EIRP PSD = Reading + Factor + Antenna gain****Factor = Duty cycle Factor + Correct Factor****The correct factor of the RBW from 1MHz to 500kHz is $10 \cdot \lg(1/0.5) = 3$** **Duty cycle Factor refer to the Duty Cycle.**

Note: For 802.11ac/ax/be modes, the device support beam-forming function, per KDB 662911 D01 Multiple Transmitter Output v02r01:

$$\bullet \quad DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;


N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k_{th} antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k_{th} antenna.


5.9G

802.11a_5845MHz_Ant 0

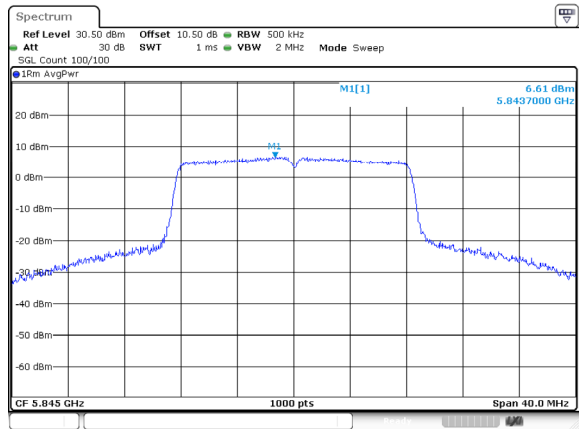


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:10:31

802.11a_5865MHz_Ant 0

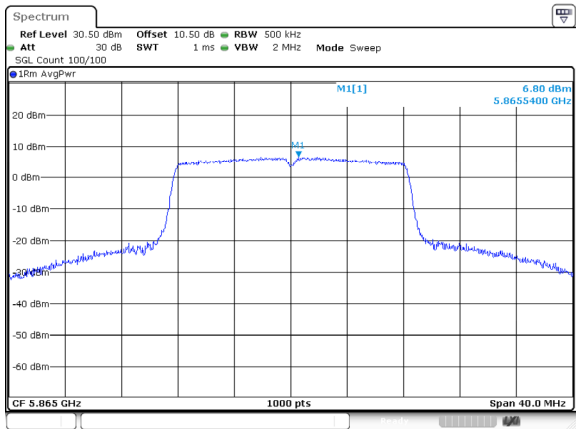


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:12:19

802.11a_5885MHz_Ant 0

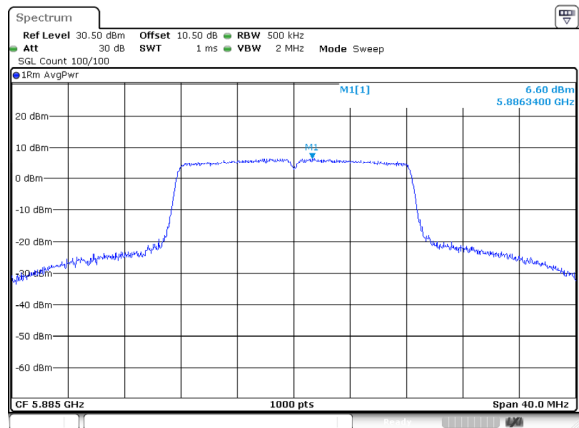


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:13:50

802.11a_5845MHz_Ant 1

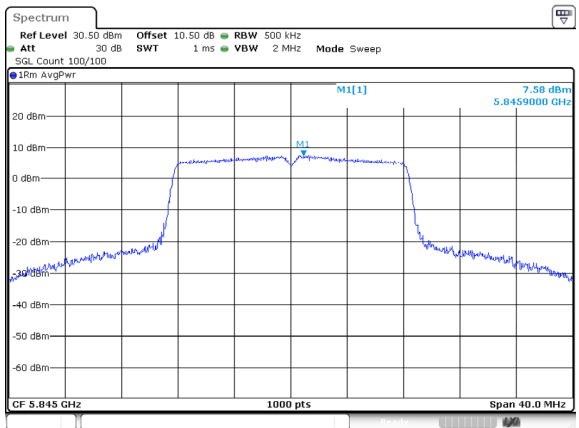


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:14:07

802.11a_5865MHz_Ant 1

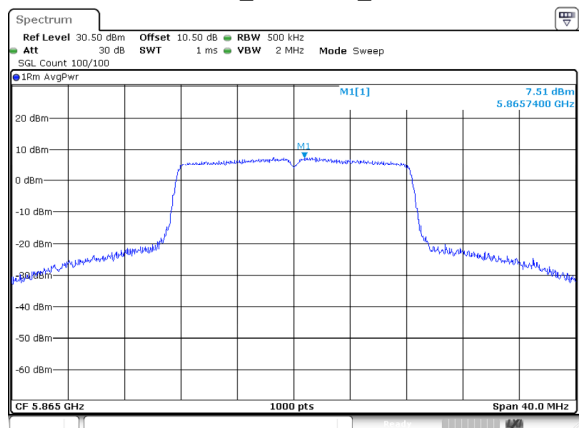


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:55:33

802.11a_5885MHz_Ant 1

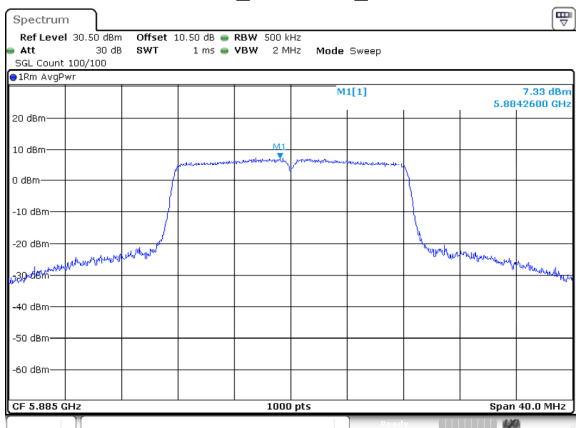


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:35:26

802.11a_5845MHz_Ant 2

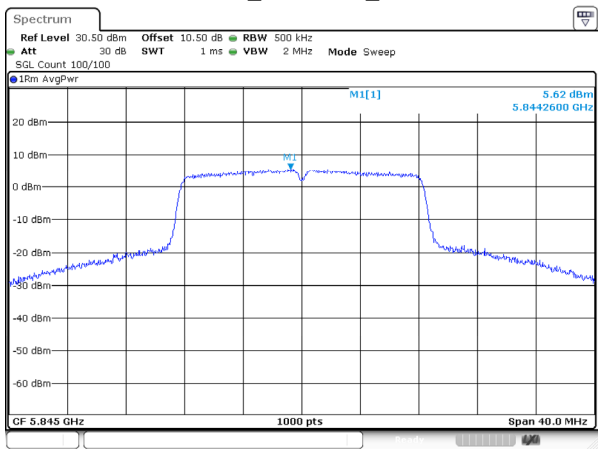


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:48:27

802.11a_5865MHz_Ant 2

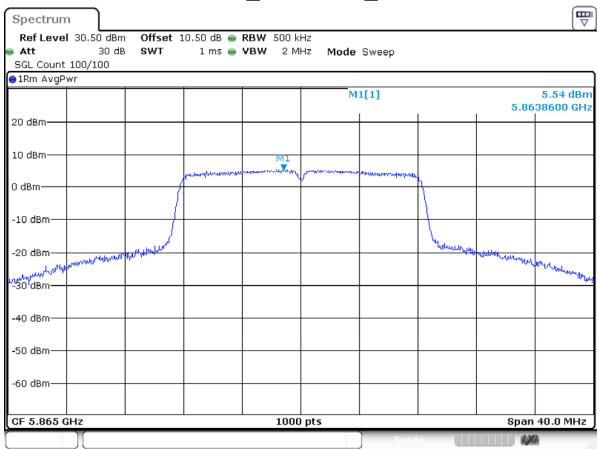


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 21:00:54

802.11a_5885MHz_Ant 2

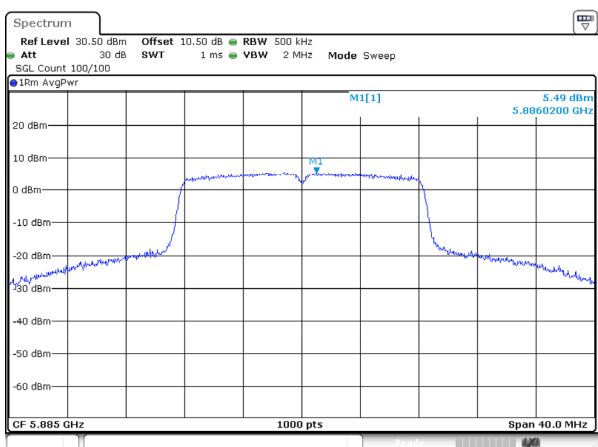


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.FEB.2026 20:58:55

802.11ac20_5845MHz_Ant 0

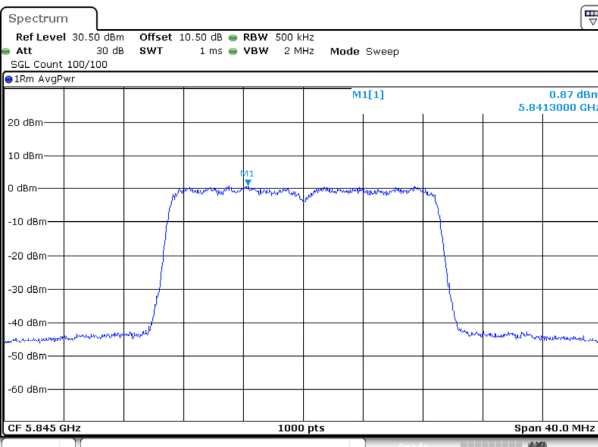


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 14:00:21

802.11ac20_5865MHz_Ant 0

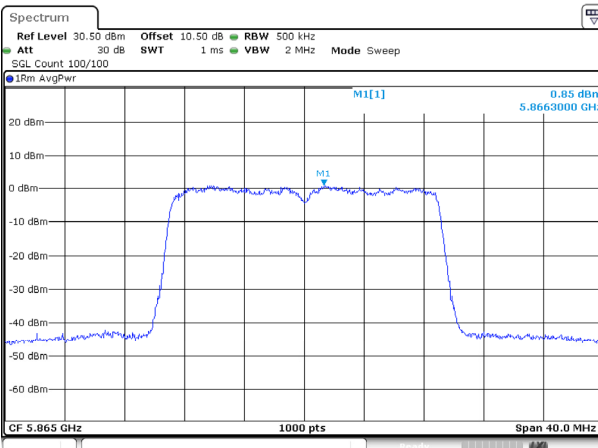


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:47:56

802.11ac20_5885MHz_Ant 0

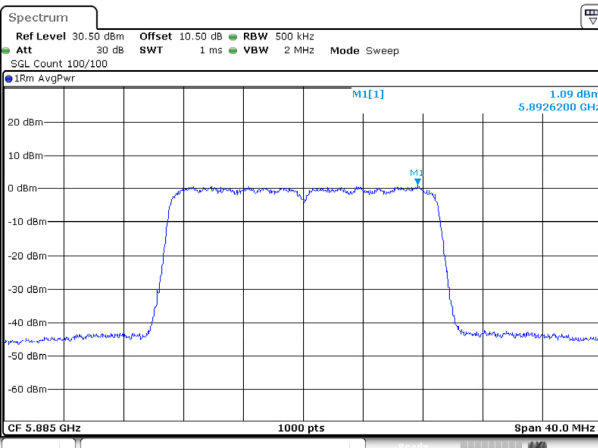


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:59:02

802.11ac20_5845MHz_Chain 1

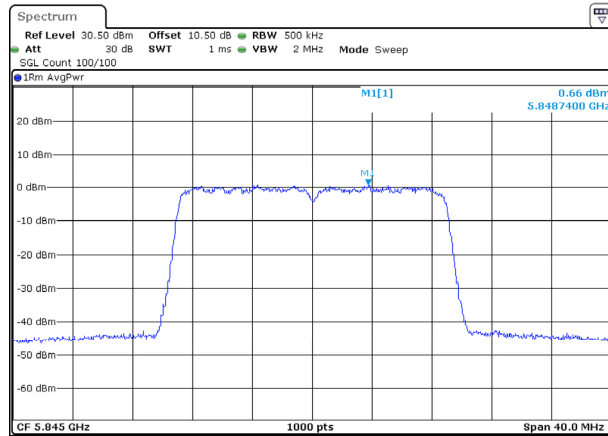


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:57:52

802.11ac20_5865MHz_Chain 1

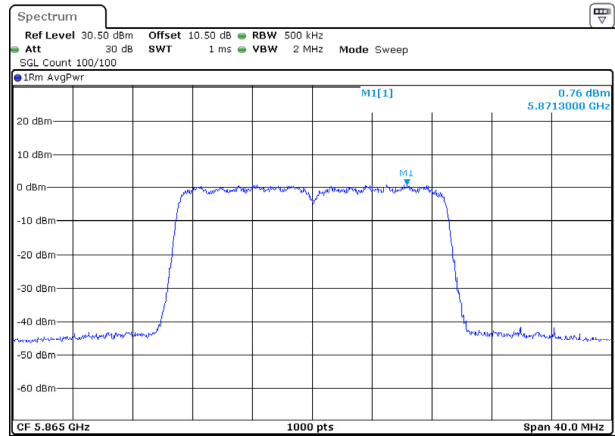


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:54:51

802.11ac20_5885MHz_Chain 1

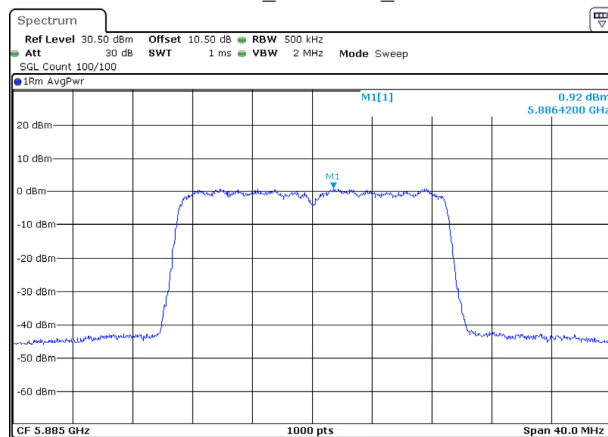


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 14:28:47

802.11ac20_5845MHz_Chain 2

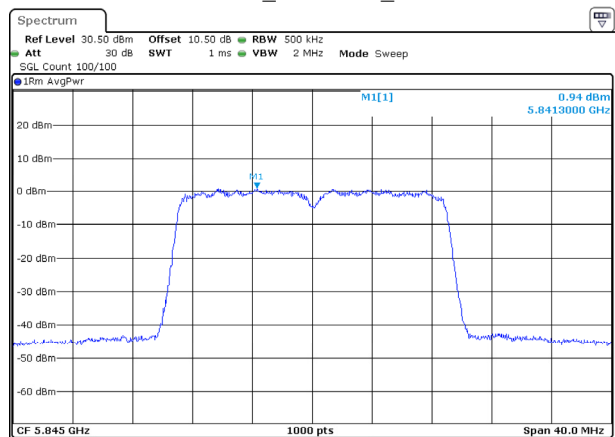


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:58:06

802.11ac20_5865MHz_Chain 2

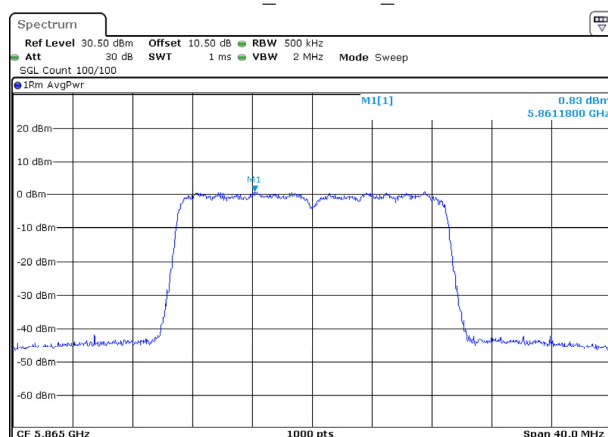


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:48:46

802.11ac20_5885MHz_Chain 2

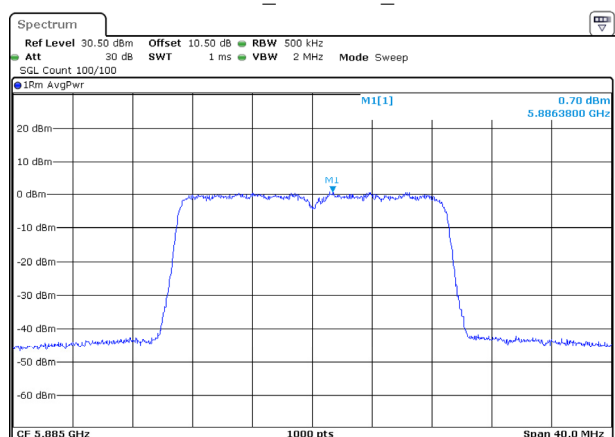


ProjectNo.:2601P12244E-RF Tester:Kungfumaster Liang
Date: 12.MAY.2026 13:59:48


802.11ac40_5835MHz_Chain 0

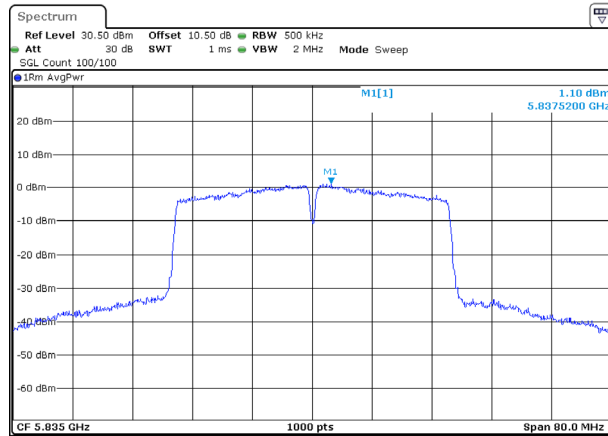


802.11ac40_5875MHz_Chain 0

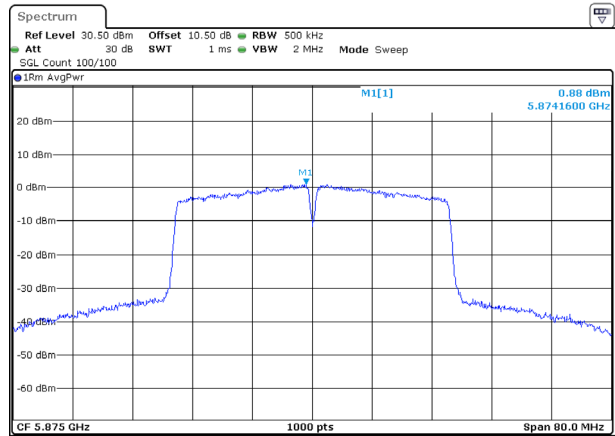


802.11ac40_5835MHz_Chain 1

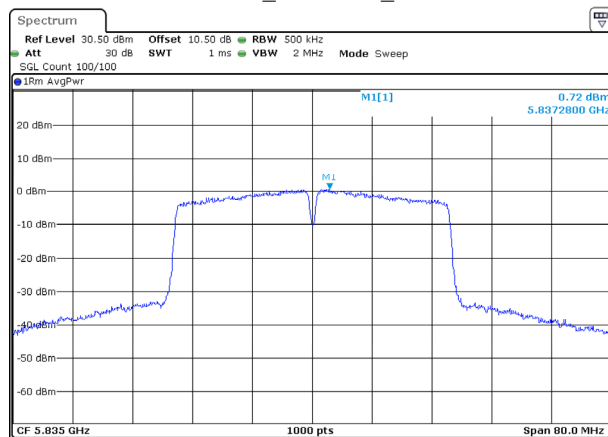


802.11ac40_5875MHz_Chain 1

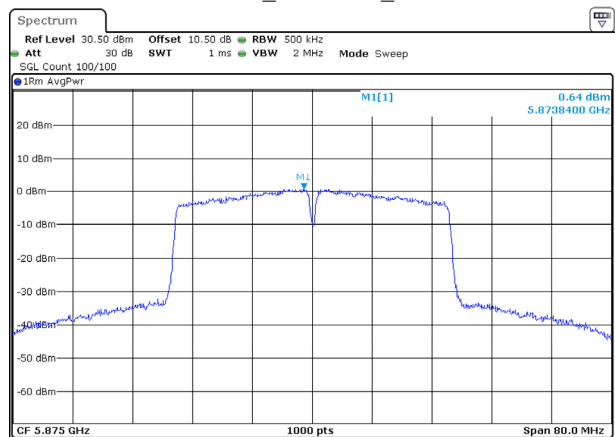


802.11ac40_5835MHz_Chain 2

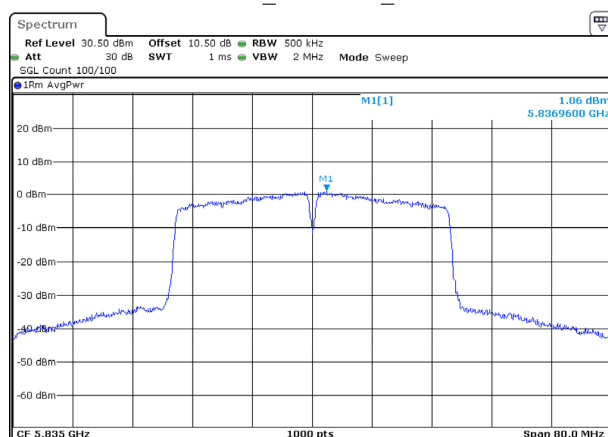

802.11ac40_5875MHz_Chain 2

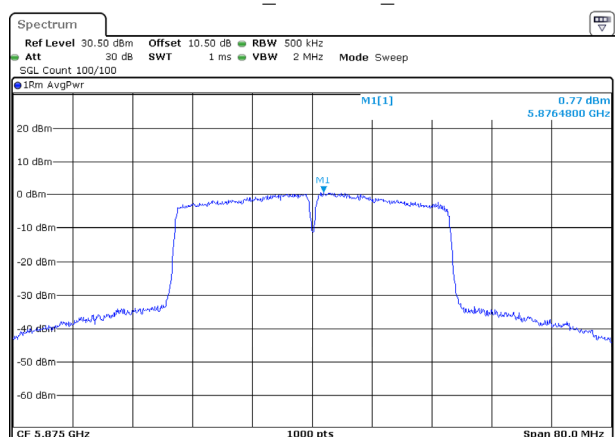


802.11ac80_5855MHz_Ant 0

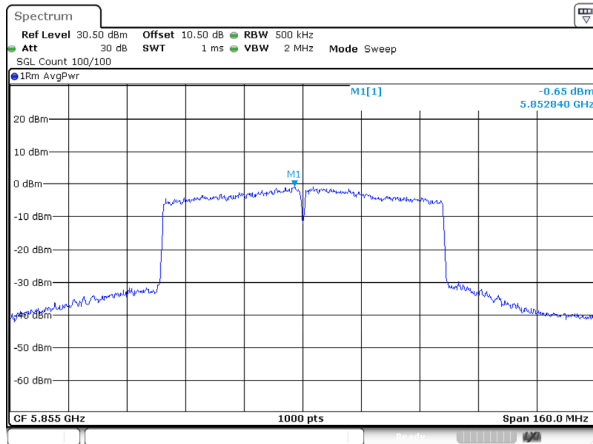


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 20:31:24

802.11ac80_5855MHz_Ant 1

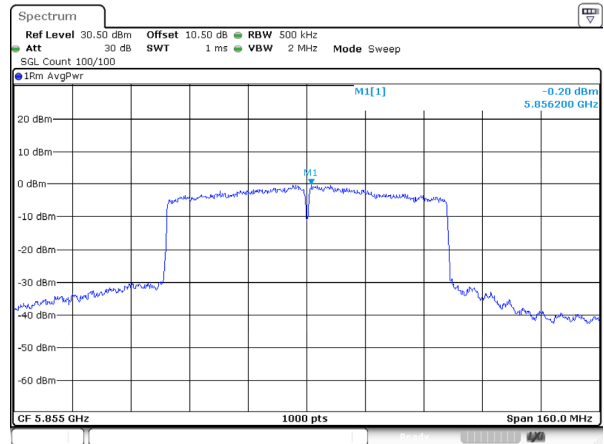


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 20:45:20

802.11ac80_5855MHz_Ant 2

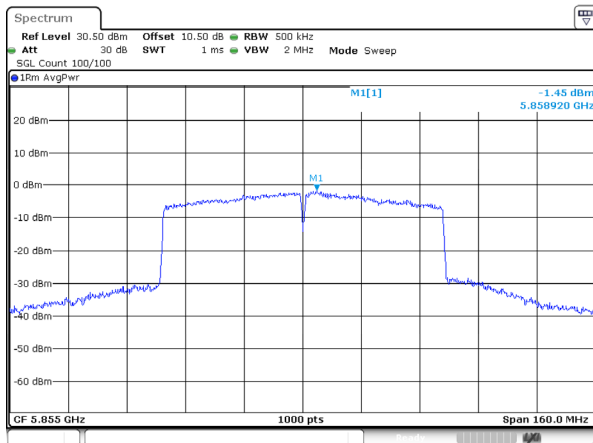


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 21:10:05

802.11ac160_5815MHz_RU_FULL_Ant 0

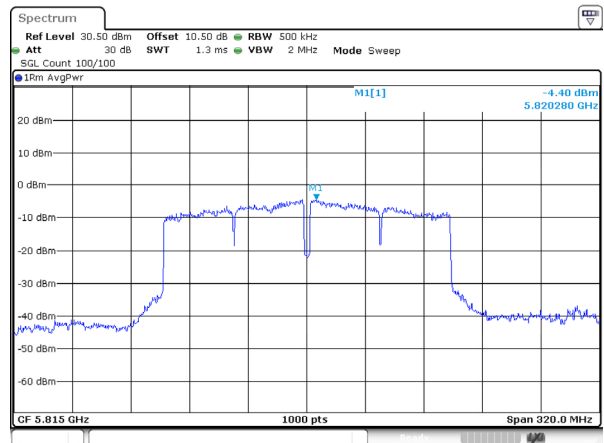


ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 02:13:10

802.11ac160_5815MHz_RU_FULL_Ant 1

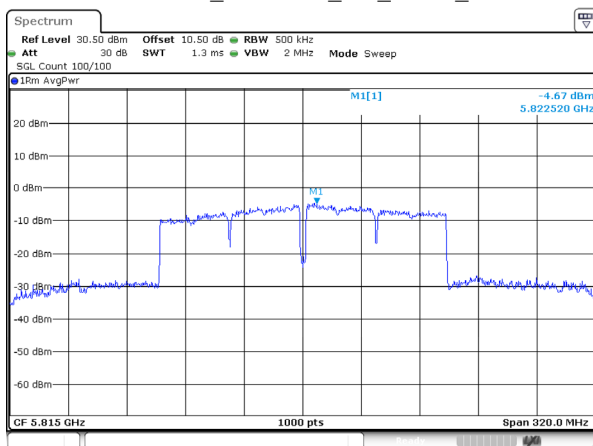

ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 02:14:49

802.11ac160_5815MHz_RU_FULL_Ant 2

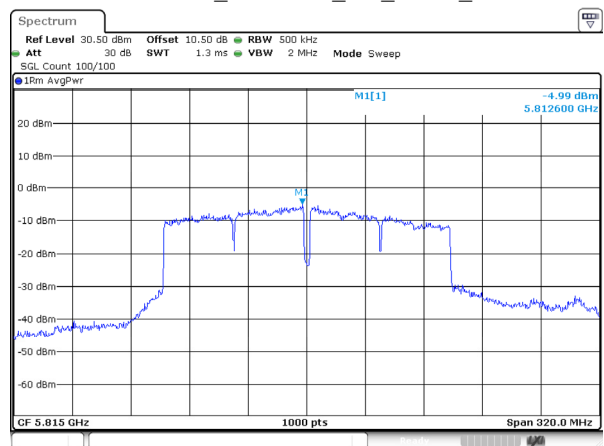

ProjectNo.:2601P12244E-RF Tester:Kungfumastr Liang
Date: 12.FEB.2026 02:16:07