

5850-5895MHz

Mode	Antenna	Test Frequency (MHz)	Average Output Power (dBm)	Antenna gain (dBi)	EIRP Power (dBm)	EIRP Limit (dBm)	Verdict
802.11a	Chain 0	5845	18.99	5.72	24.71	36	Pass
		5865	19.13	5.72	24.85	36	Pass
		5885	19.11	5.72	24.83	36	Pass
	Chain 1	5845	19.48	5.36	24.84	36	Pass
		5865	19.24	5.36	24.60	36	Pass
		5885	19.25	5.36	24.61	36	Pass
	Chain 2	5845	19.26	5.53	24.79	36	Pass
		5865	19.51	5.53	25.04	36	Pass
		5885	19.47	5.53	25.00	36	Pass
	Chain 3	5845	18.76	5.61	24.37	36	Pass
		5865	18.75	5.61	24.36	36	Pass
		5885	18.71	5.61	24.32	36	Pass
	Chain 4	5845	20.49	5.88	26.37	36	Pass
		5865	20.69	5.88	26.57	36	Pass
		5885	20.33	5.88	26.21	36	Pass
802.11ac20	Chain 0	5845	10.46	5.72	16.18	36	Pass
		5865	10.37	5.72	16.09	36	Pass
		5885	10.38	5.72	16.10	36	Pass
	Chain 1	5845	11.20	5.36	16.56	36	Pass
		5865	11.09	5.36	16.45	36	Pass
		5885	10.93	5.36	16.29	36	Pass
	Chain 2	5845	11.12	5.53	16.65	36	Pass
		5865	10.80	5.53	16.33	36	Pass
		5885	10.59	5.53	16.12	36	Pass
	Chain 3	5845	9.94	5.61	15.55	36	Pass
		5865	10.17	5.61	15.78	36	Pass
		5885	10.27	5.61	15.88	36	Pass
	Chain 4	5845	11.86	5.88	17.74	36	Pass
		5865	11.90	5.88	17.78	36	Pass
		5885	11.87	5.88	17.75	36	Pass
	Total	5845	17.96	12.61	30.57	36	Pass
		5865	17.90	12.61	30.51	36	Pass
		5885	17.84	12.61	30.45	36	Pass

Mode	Antenna	Test Frequency (MHz)	Average Output Power (dBm)	Antenna gain (dBi)	EIRP Power (dBm)	EIRP Limit (dBm)	Verdict
802.11ac40	Chain 0	5835	12.26	5.72	17.98	36	Pass
		5875	12.18	5.72	17.90	36	Pass
	Chain 1	5835	12.94	5.36	18.30	36	Pass
		5875	12.72	5.36	18.08	36	Pass
	Chain 2	5835	13.00	5.53	18.53	36	Pass
		5875	12.49	5.53	18.02	36	Pass
	Chain 3	5835	11.66	5.61	17.27	36	Pass
		5875	12.05	5.61	17.66	36	Pass
	Chain 4	5835	13.61	5.88	19.49	36	Pass
		5875	13.64	5.88	19.52	36	Pass
	Total	5835	19.73	12.61	32.34	36	Pass
		5875	19.64	12.61	32.25	36	Pass
802.11ac80	Chain 0	5855	15.02	5.72	20.74	36	Pass
	Chain 1	5855	14.36	5.36	19.72	36	Pass
	Chain 2	5855	14.65	5.53	20.18	36	Pass
	Chain 3	5855	14.47	5.61	20.08	36	Pass
	Chain 4	5855	16.10	5.88	21.98	36	Pass
	Total	5855	21.96	12.61	34.57	36	Pass
802.11ac160	Chain 0	5815	12.89	5.72	18.61	36	Pass
	Chain 1	5815	14.17	5.36	19.53	36	Pass
	Chain 2	5815	14.08	5.53	19.61	36	Pass
	Chain 3	5815	14.44	5.61	20.05	36	Pass
	Chain 4	5815	15.67	5.88	21.55	36	Pass
	Total	5815	21.33	12.61	33.94	36	Pass
802.11be20 _RU_FULL	Chain 0	5845	9.24	5.72	14.96	36	Pass
		5865	9.64	5.72	15.36	36	Pass
		5885	9.74	5.72	15.46	36	Pass
	Chain 1	5845	9.58	5.36	14.94	36	Pass
		5865	9.00	5.36	14.36	36	Pass
		5885	8.71	5.36	14.07	36	Pass
	Chain 2	5845	9.98	5.53	15.51	36	Pass
		5865	9.76	5.53	15.29	36	Pass
		5885	9.61	5.53	15.14	36	Pass

Mode	Antenna	Test Frequency (MHz)	Average Output Power (dBm)	Antenna gain (dBi)	EIRP Power (dBm)	EIRP Limit (dBm)	Verdict
802.11be20 _RU_FULL	Chain 3	5845	9.52	5.61	15.13	36	Pass
		5865	9.14	5.61	14.75	36	Pass
		5885	9.21	5.61	14.82	36	Pass
	Chain 4	5845	11.35	5.88	17.23	36	Pass
		5865	11.04	5.88	16.92	36	Pass
		5885	10.76	5.88	16.64	36	Pass
	Total	5845	16.99	12.61	29.60	36	Pass
		5865	16.77	12.61	29.38	36	Pass
		5885	16.65	12.61	29.26	36	Pass
802.11be40 _RU_FULL	Chain 0	5835	12.27	5.72	17.99	36	Pass
		5875	12.35	5.72	18.07	36	Pass
	Chain 1	5835	13.08	5.36	18.44	36	Pass
		5875	12.85	5.36	18.21	36	Pass
	Chain 2	5835	13.14	5.53	18.67	36	Pass
		5875	12.62	5.53	18.15	36	Pass
	Chain 3	5835	11.74	5.61	17.35	36	Pass
		5875	12.21	5.61	17.82	36	Pass
	Chain 4	5835	13.72	5.88	19.60	36	Pass
		5875	13.84	5.88	19.72	36	Pass
	Total	5835	19.84	12.61	32.45	36	Pass
		5875	19.80	12.61	32.41	36	Pass
802.11be80 _RU_FULL	Chain 0	5855	15.43	5.72	21.15	36	Pass
	Chain 1	5855	14.78	5.36	20.14	36	Pass
	Chain 2	5855	14.98	5.53	20.51	36	Pass
	Chain 3	5855	15.01	5.61	20.62	36	Pass
	Chain 4	5855	16.45	5.88	22.33	36	Pass
	Total	5855	22.36	12.61	34.97	36	Pass
802.11be160	Chain 0	5815	13.34	5.72	19.06	36	Pass
	Chain 1	5815	13.45	5.36	18.81	36	Pass
	Chain 2	5815	13.59	5.53	19.12	36	Pass
	Chain 3	5815	13.71	5.61	19.32	36	Pass
	Chain 4	5815	15.00	5.88	20.88	36	Pass
	Total	5815	20.85	12.61	33.46	36	Pass

Appendix C.3.4: Power Spectral Density

- Note 1: This device supports TPC and beam-forming function.
- Note 2: Factor = Duty Cycle Factor + Correct Factor
- The correct factor of the RBW from 1MHz to 500kHz is $10 \cdot \lg(1/0.5) = 3$
- Note 3: Result = Reading + Factor + Antenna gain
- Note 4: For 802.11 ac/ax/be modes MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01:

•
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k th antenna.

ANT0(Chain 0)	Antenna Gain	5.72dBi [#]	Directional Gain	12.61dBi
ANT1(Chain 1)	Antenna Gain	5.36dBi [#]		
ANT2(Chain 2)	Antenna Gain	5.53dBi [#]		
ANT3(Chain 3)	Antenna Gain	5.61dBi [#]		
ANT4(Chain 4)	Antenna Gain	5.88dBi [#]		

5850-5895MHz


Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor (dB)	Antenna gain (dBi)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	Chain 0	5845	4.85	3.17	5.72	13.74	20	Pass
		5865	4.96	3.17	5.72	13.85	20	Pass
		5885	4.88	3.17	5.72	13.77	20	Pass
	Chain 1	5845	5.31	3.17	5.36	13.84	20	Pass
		5865	4.98	3.17	5.36	13.51	20	Pass
		5885	5.02	3.17	5.36	13.55	20	Pass
	Chain 2	5845	5.10	3.17	5.53	13.80	20	Pass
		5865	5.13	3.17	5.53	13.83	20	Pass
		5885	5.22	3.17	5.53	13.92	20	Pass
	Chain 3	5845	4.60	3.17	5.61	13.38	20	Pass
		5865	4.53	3.17	5.61	13.31	20	Pass
		5885	4.37	3.17	5.61	13.15	20	Pass
	Chain 4	5845	6.31	3.17	5.88	15.36	20	Pass
		5865	6.39	3.17	5.88	15.44	20	Pass
		5885	6.08	3.17	5.88	15.13	20	Pass
802.11ac20	Chain 0	5845	-3.99	3.17	5.72	4.90	20	Pass
		5865	-4.12	3.17	5.72	4.77	20	Pass
		5885	-4.07	3.17	5.72	4.82	20	Pass
	Chain 1	5845	-3.24	3.17	5.36	5.29	20	Pass
		5865	-3.35	3.17	5.36	5.18	20	Pass
		5885	-3.51	3.17	5.36	5.02	20	Pass
	Chain 2	5845	-3.30	3.17	5.53	5.40	20	Pass
		5865	-5.26	3.17	5.53	3.44	20	Pass
		5885	-3.89	3.17	5.53	4.81	20	Pass
	Chain 3	5845	-4.50	3.17	5.61	4.28	20	Pass
		5865	-4.28	3.17	5.61	4.50	20	Pass
		5885	-4.13	3.17	5.61	4.65	20	Pass
	Chain 4	5845	-2.56	3.17	5.88	6.49	20	Pass
		5865	-2.57	3.17	5.88	6.48	20	Pass
		5885	-2.60	3.17	5.88	6.45	20	Pass
	Total	5845	/	/	12.61	19.30	20	Pass
		5865	/	/	12.61	18.95	20	Pass
		5885	/	/	12.61	19.17	20	Pass

Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor (dB)	Antenna gain (dBi)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11ac40	Chain 0	5835	-4.71	3.40	5.72	4.41	20	Pass
		5875	-4.68	3.40	5.72	4.44	20	Pass
	Chain 1	5835	-4.02	3.40	5.36	4.74	20	Pass
		5875	-4.23	3.40	5.36	4.53	20	Pass
	Chain 2	5835	-3.92	3.40	5.53	5.01	20	Pass
		5875	-4.52	3.40	5.53	4.41	20	Pass
	Chain 3	5835	-5.30	3.40	5.61	3.71	20	Pass
		5875	-4.89	3.40	5.61	4.12	20	Pass
	Chain 4	5835	-3.38	3.40	5.88	5.90	20	Pass
		5875	-3.27	3.40	5.88	6.01	20	Pass
Total	5835	/	/	12.61	18.78	20	Pass	
	5875	/	/	12.61	18.72	20	Pass	
802.11ac80	Chain 0	5855	-4.94	3.66	5.72	4.44	20	Pass
	Chain 1	5855	-5.69	3.66	5.36	3.33	20	Pass
	Chain 2	5855	-5.19	3.66	5.53	4.00	20	Pass
	Chain 3	5855	-5.42	3.66	5.61	3.85	20	Pass
	Chain 4	5855	-3.87	3.66	5.88	5.67	20	Pass
	Total	5855	/	/	12.61	18.28	20	Pass
802.11ac160	Chain 0	5815	-9.96	3.65	5.72	-0.59	20	Pass
	Chain 1	5815	-9.08	3.65	5.36	-0.07	20	Pass
	Chain 2	5815	-8.71	3.65	5.53	0.47	20	Pass
	Chain 3	5815	-8.68	3.65	5.61	0.58	20	Pass
	Chain 4	5815	-7.13	3.65	5.88	2.40	20	Pass
	Total	5815	/	/	12.61	14.64	20	Pass
802.11be20	Chain 0	5845	-5.71	3.68	5.72	3.69	20	Pass
		5865	-5.18	3.68	5.72	4.22	20	Pass
		5885	-5.20	3.68	5.72	4.20	20	Pass
	Chain 1	5845	-5.49	3.68	5.36	3.55	20	Pass
		5865	-5.96	3.68	5.36	3.08	20	Pass
		5885	-6.17	3.68	5.36	2.87	20	Pass
	Chain 2	5845	-4.97	3.68	5.53	4.24	20	Pass
		5865	-5.17	3.68	5.53	4.04	20	Pass
		5885	-5.48	3.68	5.53	3.73	20	Pass


Mode	Antenna	Test Frequency (MHz)	Reading (dBm/MHz)	Factor (dB)	Antenna gain (dBi)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11be20	Chain 3	5845	-5.40	3.68	5.61	3.89	20	Pass
		5865	-5.86	3.68	5.61	3.43	20	Pass
		5885	-5.73	3.68	5.61	3.56	20	Pass
	Chain 4	5845	-3.57	3.68	5.88	5.99	20	Pass
		5865	-3.93	3.68	5.88	5.63	20	Pass
		5885	-4.26	3.68	5.88	5.30	20	Pass
	Total	5845	/	/	12.61	18.32	20	Pass
		5865	/	/	12.61	18.12	20	Pass
		5885	/	/	12.61	17.96	20	Pass
802.11be40	Chain 0	5835	-5.05	3.77	5.72	4.44	20	Pass
		5875	-4.90	3.77	5.72	4.59	20	Pass
	Chain 1	5835	-4.10	3.77	5.36	5.03	20	Pass
		5875	-4.46	3.77	5.36	4.67	20	Pass
	Chain 2	5835	-4.14	3.77	5.53	5.16	20	Pass
		5875	-4.81	3.77	5.53	4.49	20	Pass
	Chain 3	5835	-6.84	3.77	5.61	2.54	20	Pass
		5875	-5.16	3.77	5.61	4.22	20	Pass
	Chain 4	5835	-3.65	3.77	5.88	6.00	20	Pass
		5875	-3.50	3.77	5.88	6.15	20	Pass
	Total	5835	/	/	12.61	18.75	20	Pass
		5875	/	/	12.61	18.84	20	Pass
802.11be80	Chain 0	5855	-4.93	3.75	5.72	4.54	20	Pass
	Chain 1	5855	-5.49	3.75	5.36	3.62	20	Pass
	Chain 2	5855	-5.29	3.75	5.53	3.99	20	Pass
	Chain 3	5855	-5.33	3.75	5.61	4.03	20	Pass
	Chain 4	5855	-3.92	3.75	5.88	5.71	20	Pass
	Total	5855	/	/	12.61	18.40	20	Pass
802.11be160	Chain 0	5815	-9.67	3.85	5.72	-0.10	20	Pass
	Chain 1	5815	-9.78	3.85	5.36	-0.57	20	Pass
	Chain 2	5815	-9.64	3.85	5.53	-0.26	20	Pass
	Chain 3	5815	-9.68	3.85	5.61	-0.22	20	Pass
	Chain 4	5815	-8.02	3.85	5.88	1.71	20	Pass
	Total	5815	/	/	12.61	14.15	20	Pass

5850-5895MHz


802.11a_5845MHz_Chain 0

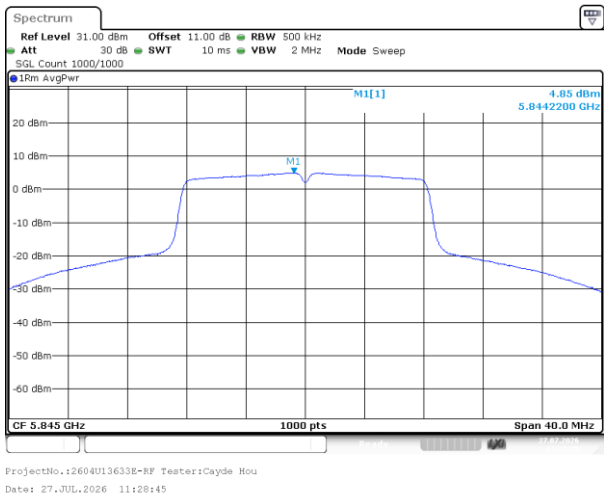


802.11a_5865MHz_Chain 0

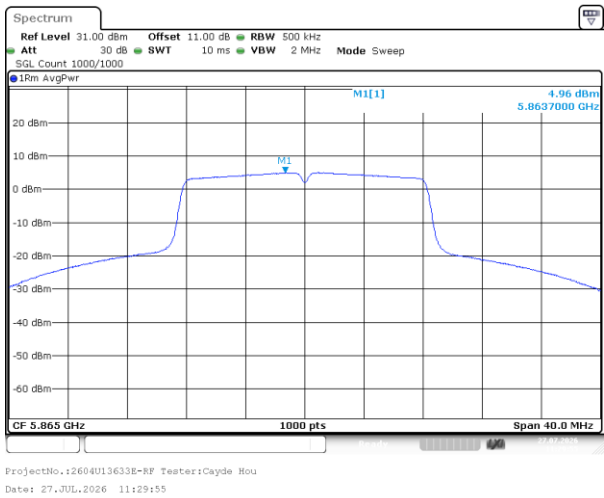


802.11a_5885MHz_Chain 0

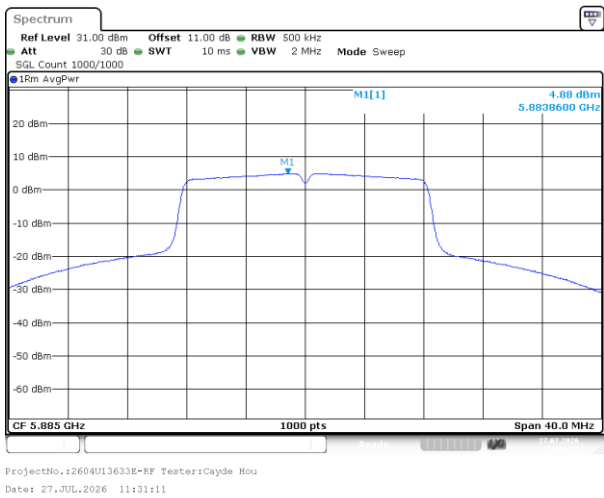


802.11a_5845MHz_Chain 1

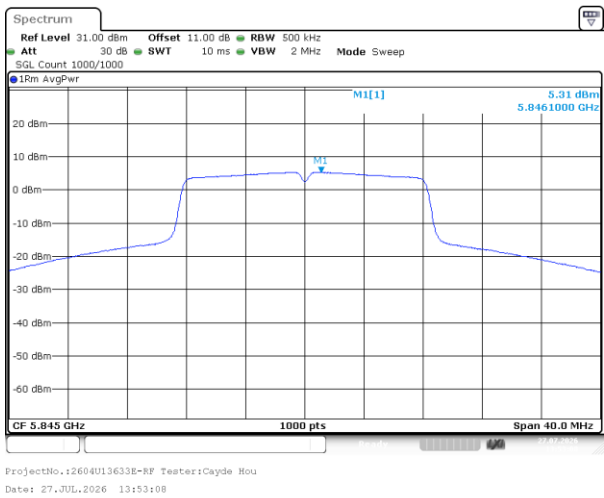


802.11a_5865MHz_Chain 1

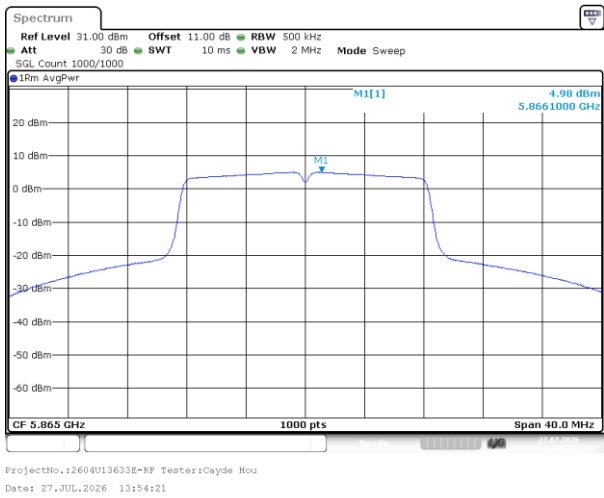

802.11a_5885MHz_Chain 1

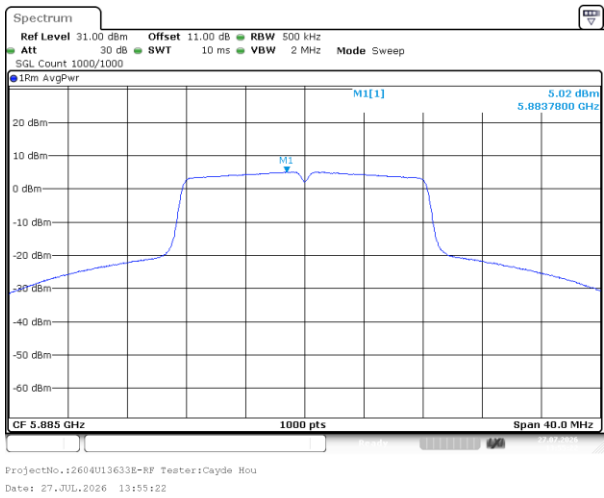


802.11a_5845MHz_Chain 2

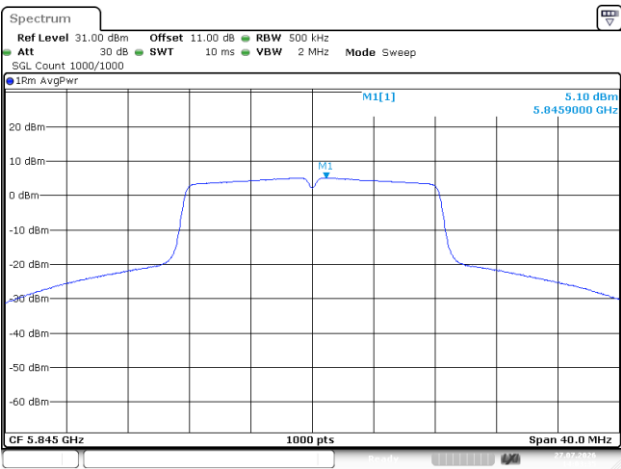


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:03:36

802.11a_5865MHz_Chain 2

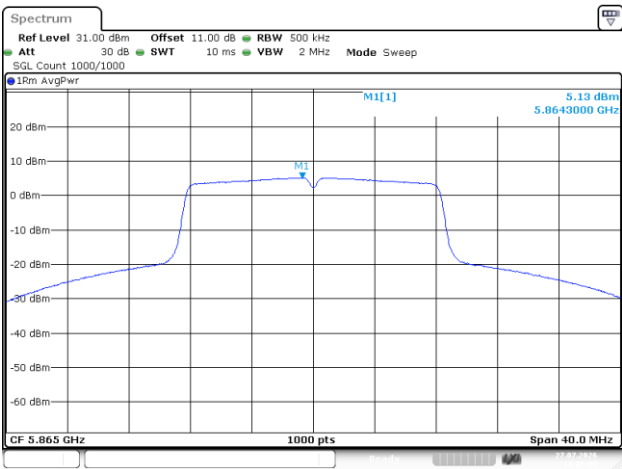


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:05:00

802.11a_5885MHz_Chain 2

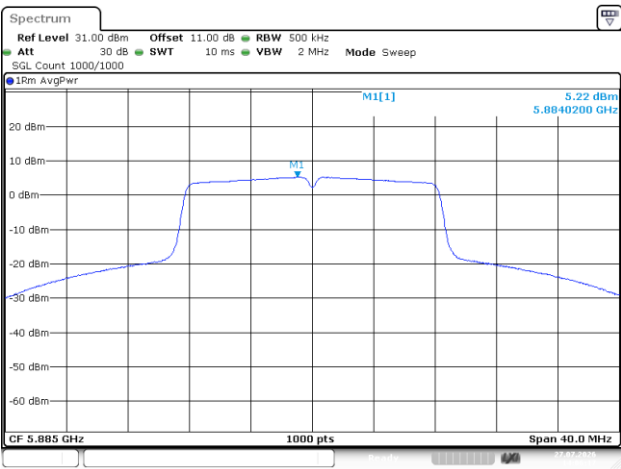


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:06:18

802.11a_5845MHz_Chain 3

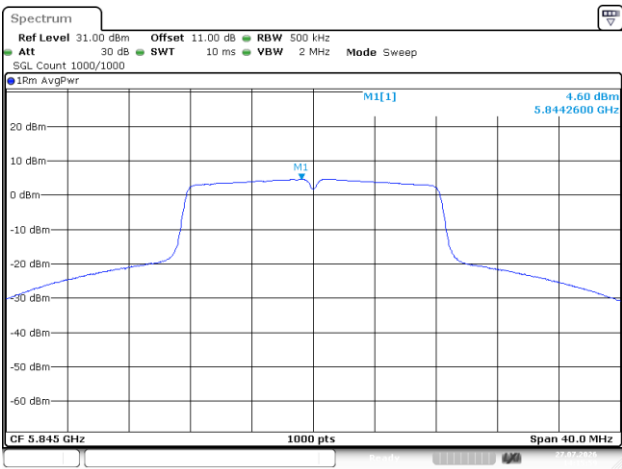


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:16:00

802.11a_5865MHz_Chain 3

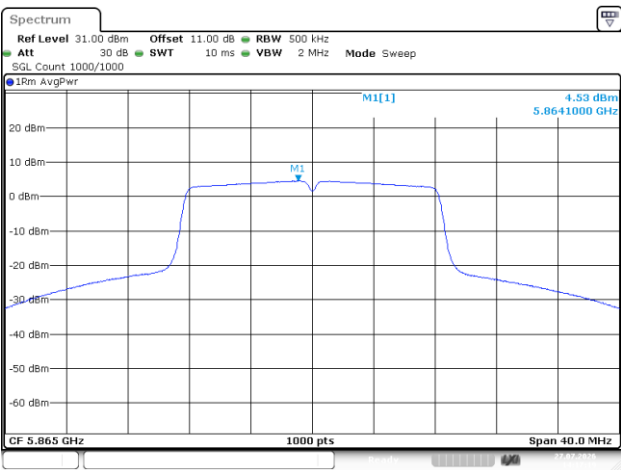


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:17:19

802.11a_5885MHz_Chain 3

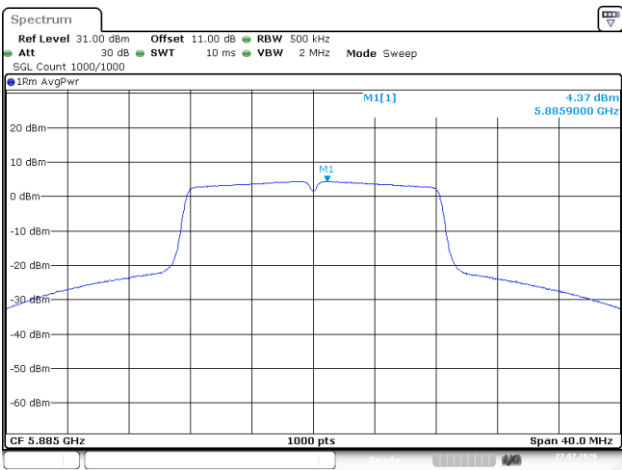


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:18:24

802.11a_5845MHz_Chain 4

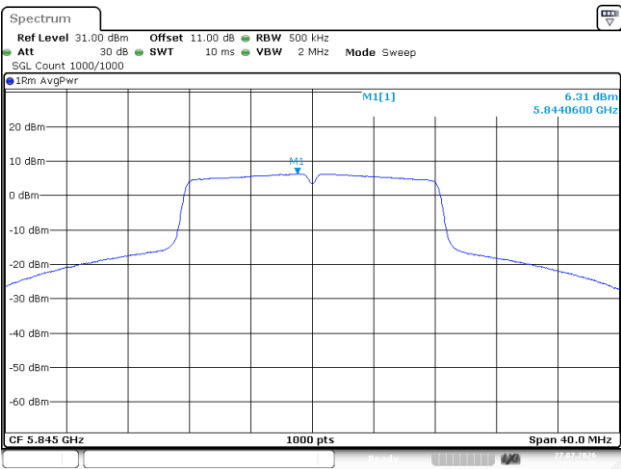


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:20:30

802.11a_5865MHz_Chain 4

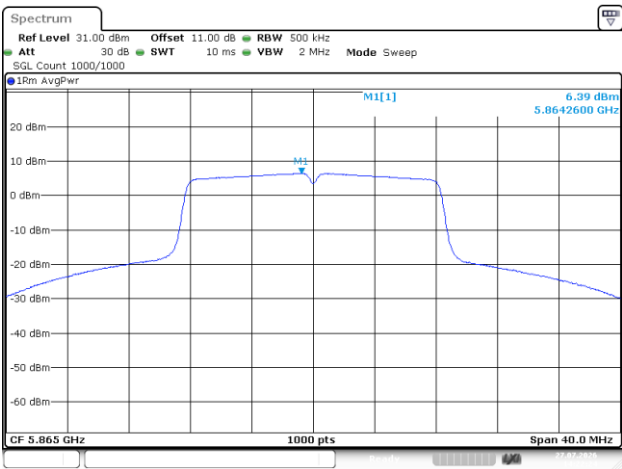


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:22:25

802.11a_5885MHz_Chain 4

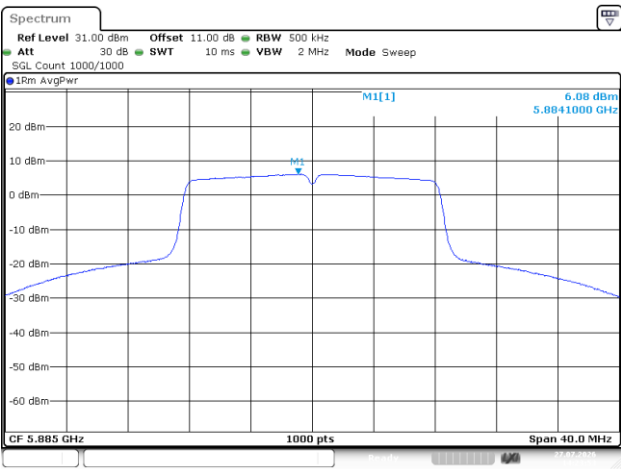


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 14:23:54

802.11ac20_5845MHz_Chain 0

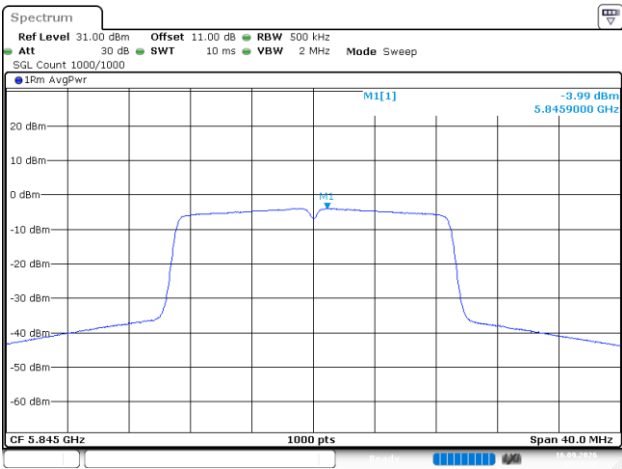


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:32:39

802.11ac20_5865MHz_Chain 0

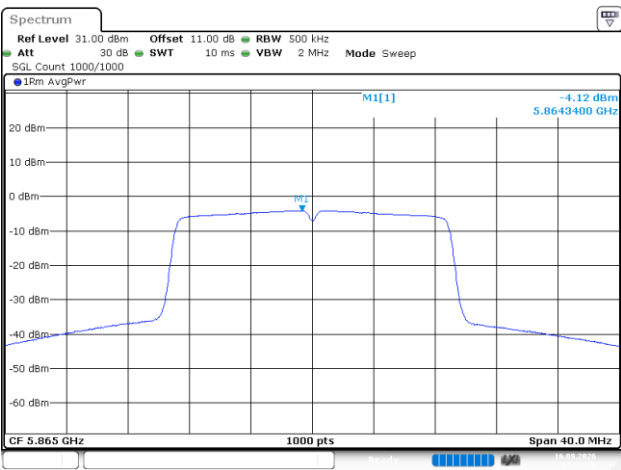


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:33:26

802.11ac20_5885MHz_Chain 0

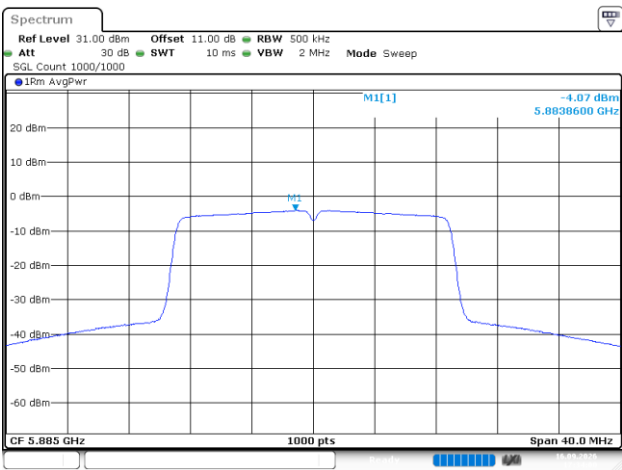


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:34:01

802.11ac20_5845MHz_Chain 1

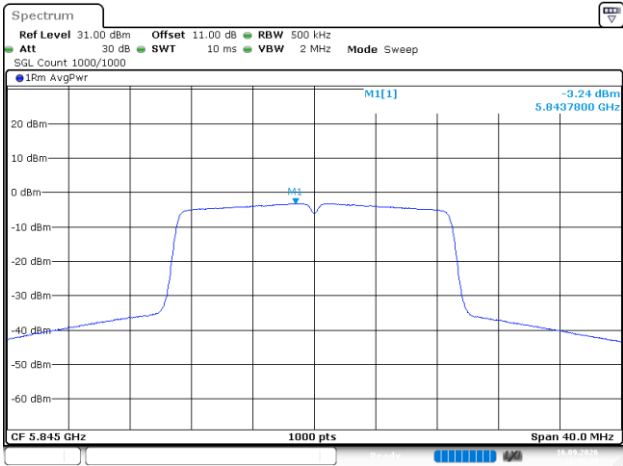


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:42:45

802.11ac20_5865MHz_Chain 1

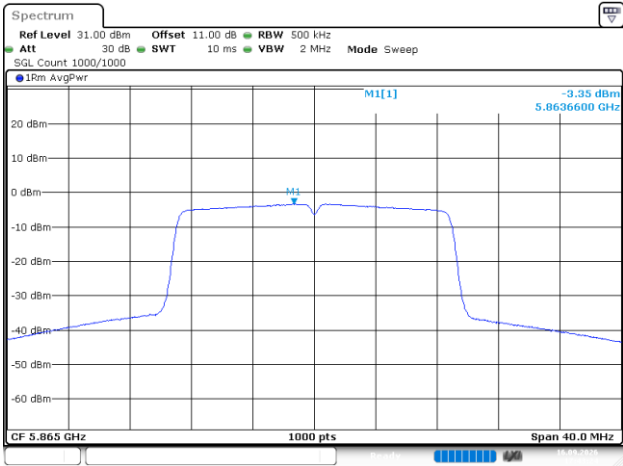


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:43:25

802.11ac20_5885MHz_Chain 1

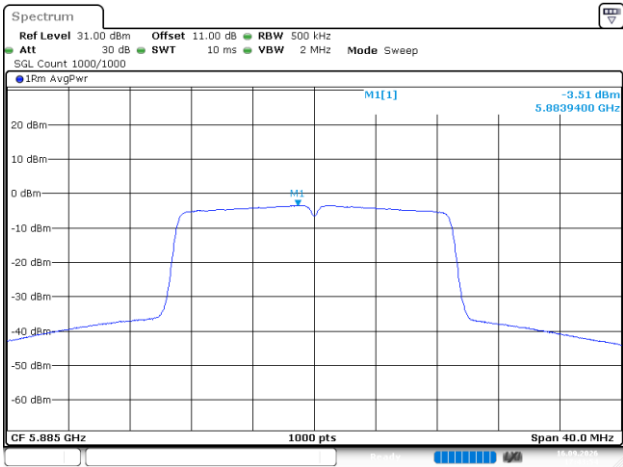


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:43:55

802.11ac20_5845MHz_Chain 2

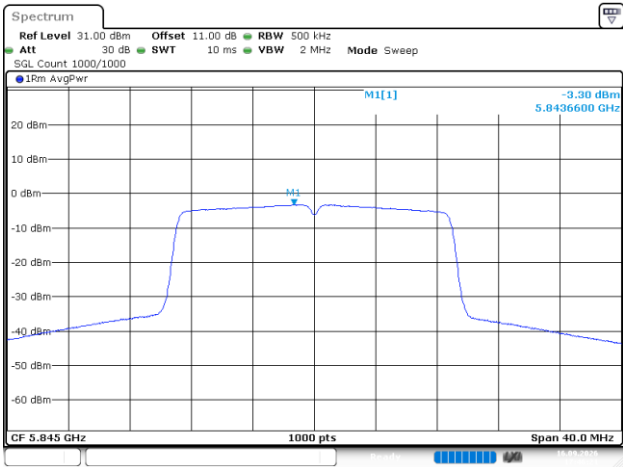


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:46:22

802.11ac20_5865MHz_Chain 2

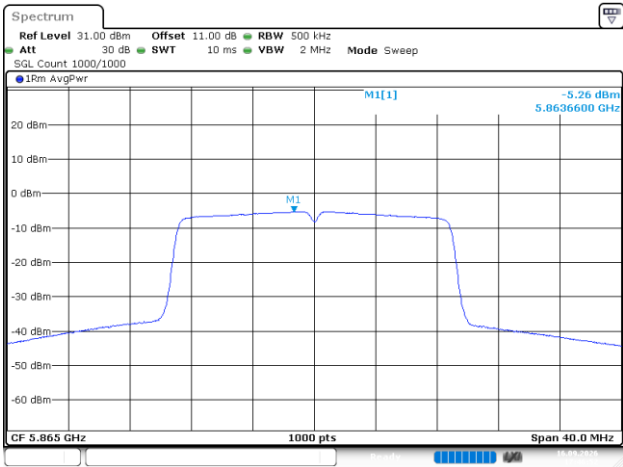


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:46:53

802.11ac20_5885MHz_Chain 2

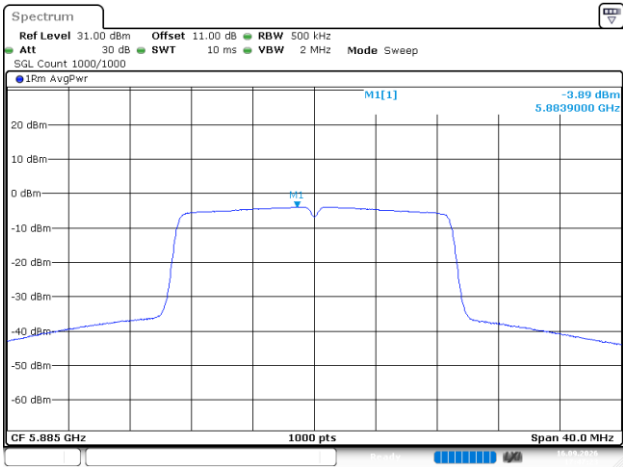


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:47:24

802.11ac20_5845MHz_Chain 3

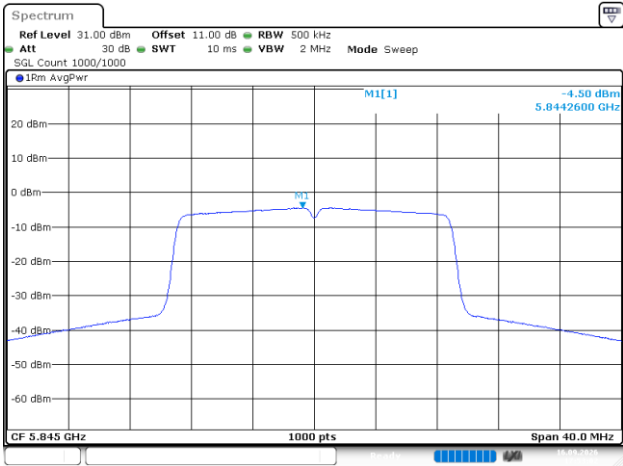


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:53:03

802.11ac20_5865MHz_Chain 3

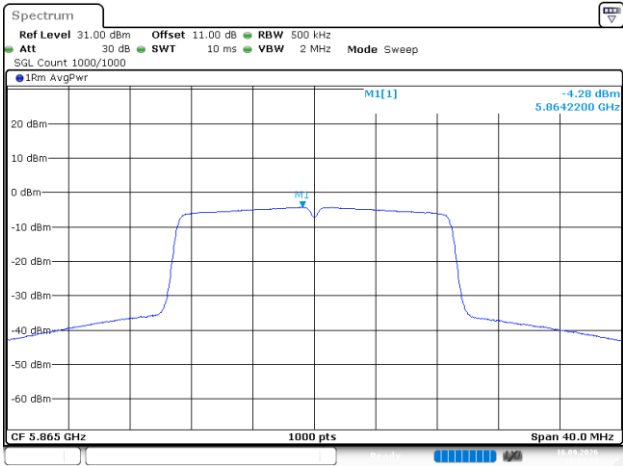


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:53:34

802.11ac20_5885MHz_Chain 3

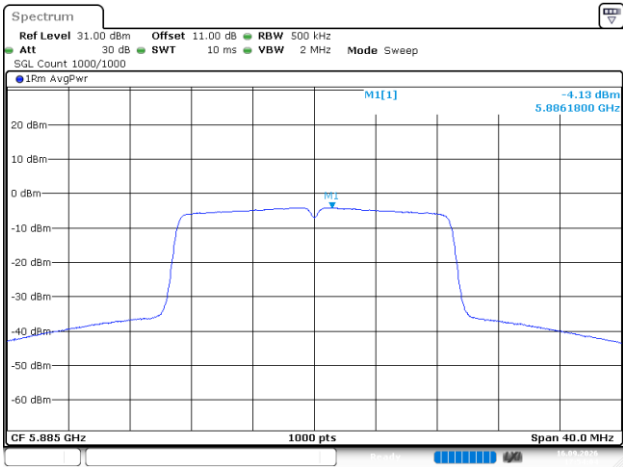


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:54:05

802.11ac20_5845MHz_Chain 4

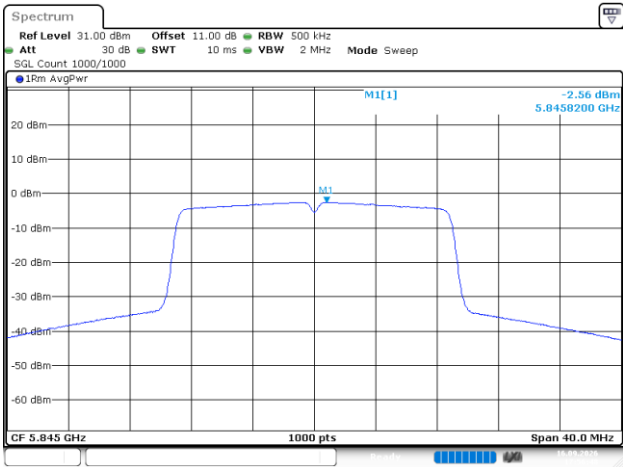


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:56:48

802.11ac20_5865MHz_Chain 4

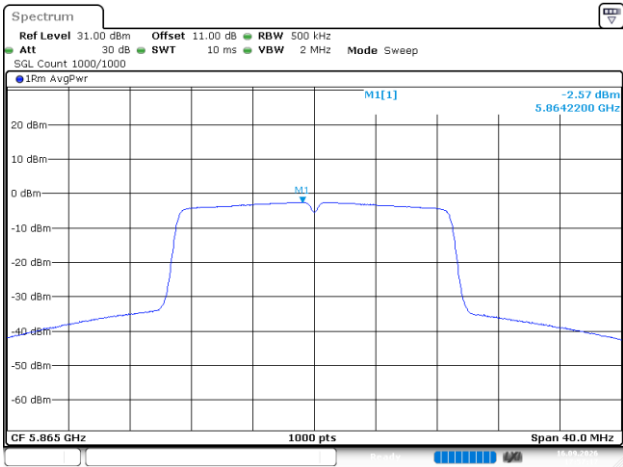


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:57:18

802.11ac20_5885MHz_Chain 4

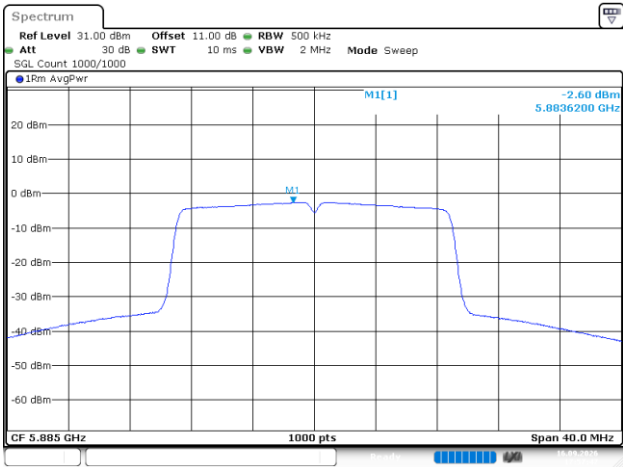


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:57:47

802.11ac40_5835MHz_Chain 0

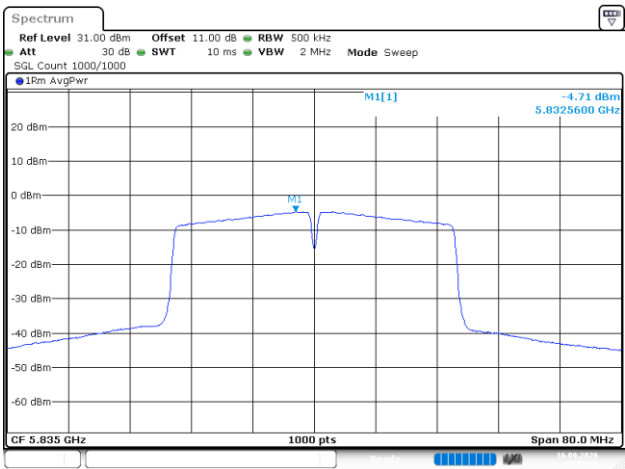


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:35:50

802.11ac40_5875MHz_Chain 0

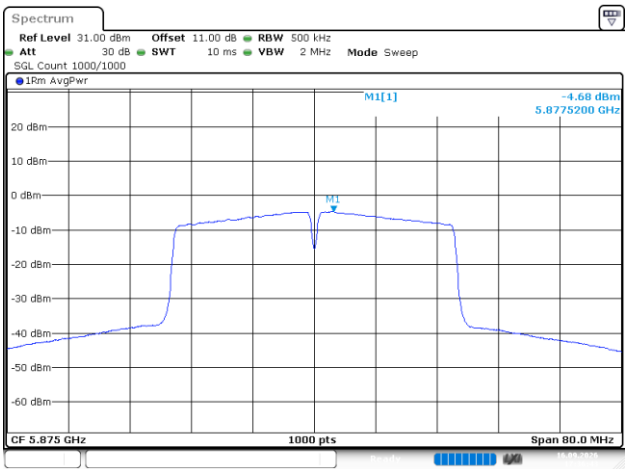


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:36:43

802.11ac40_5835MHz_Chain 1

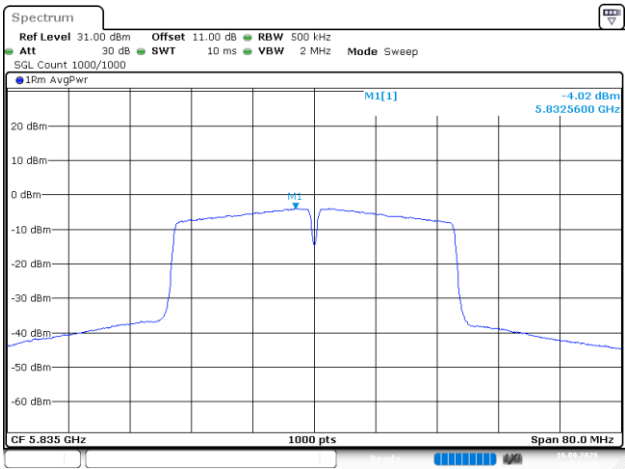


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:44:43

802.11ac40_5875MHz_Chain 1

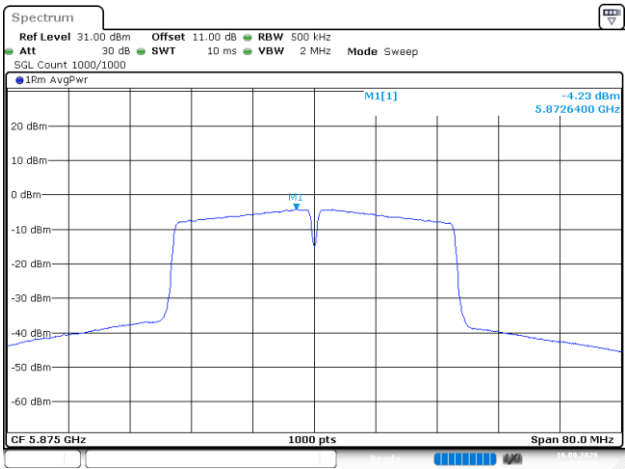


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:45:17

802.11ac40_5835MHz_Chain 2

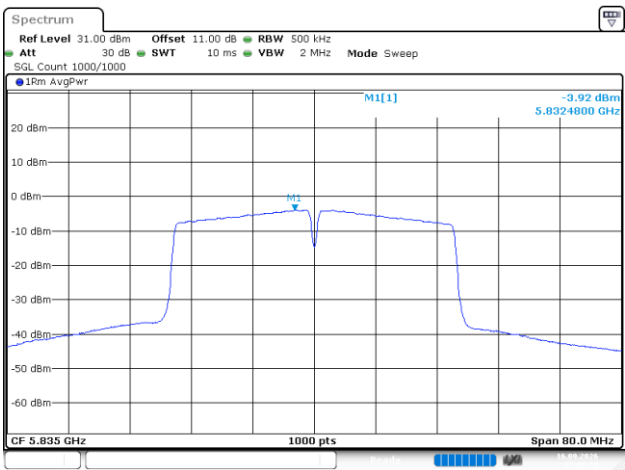


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:47:59

802.11ac40_5875MHz_Chain 2

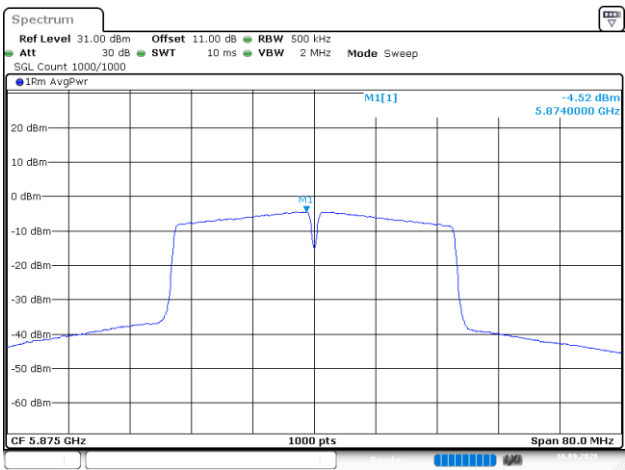


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:48:31

802.11ac40_5835MHz_Chain 3

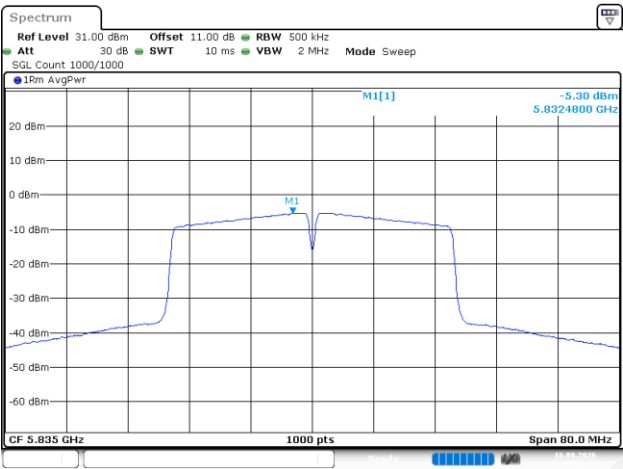


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:54:41

802.11ac40_5875MHz_Chain 3

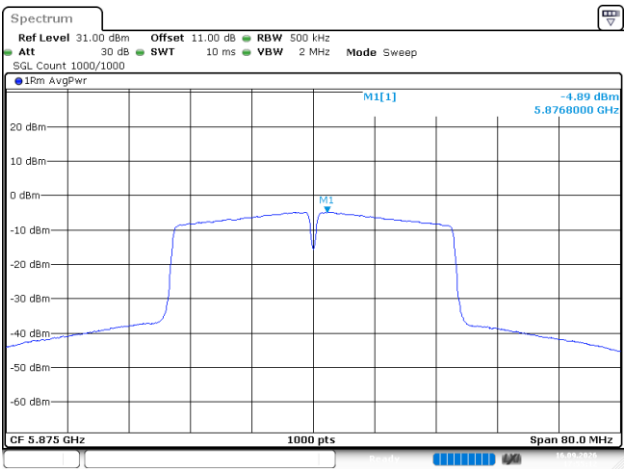


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:55:13

802.11ac40_5835MHz_Chain 4

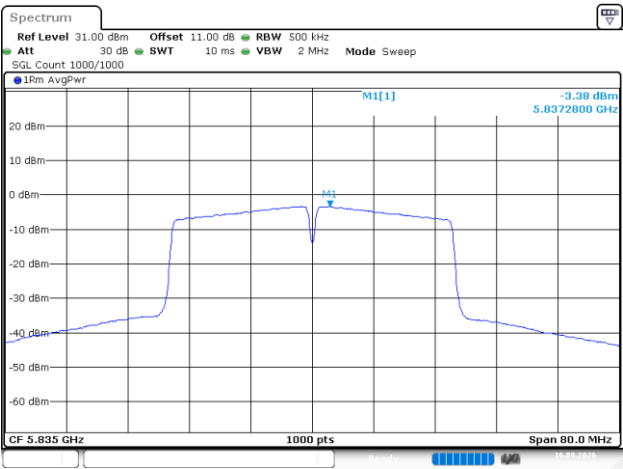


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:58:23

802.11ac40_5875MHz_Chain 4

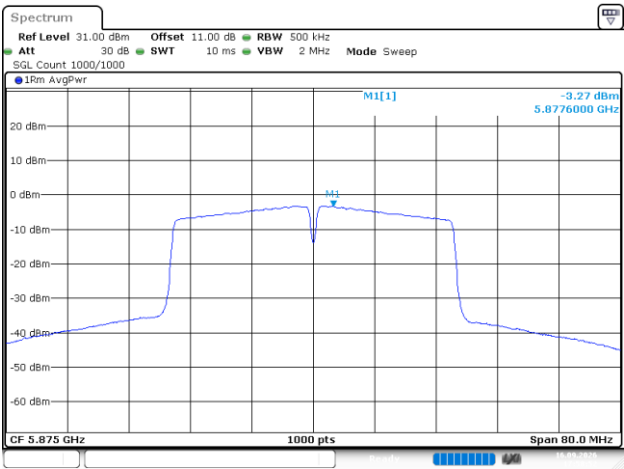


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:58:53

802.11ac80_5855MHz_Chain 0

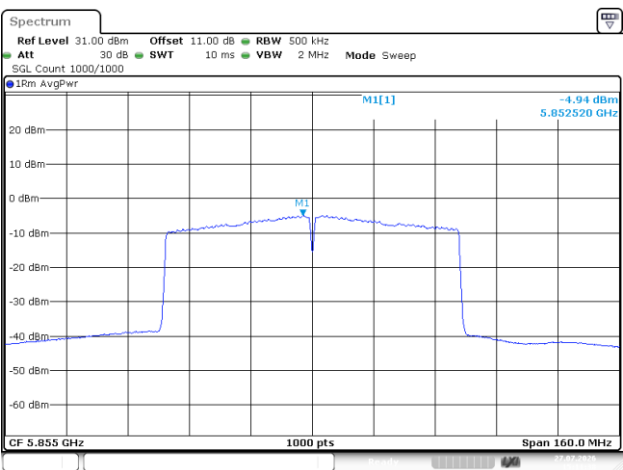


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 15:11:38

802.11ac80_5855MHz_Chain 1

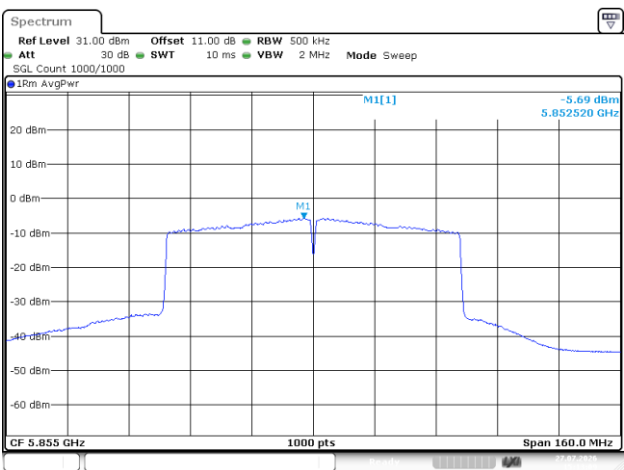


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 15:13:09

802.11ac80_5855MHz_Chain 2

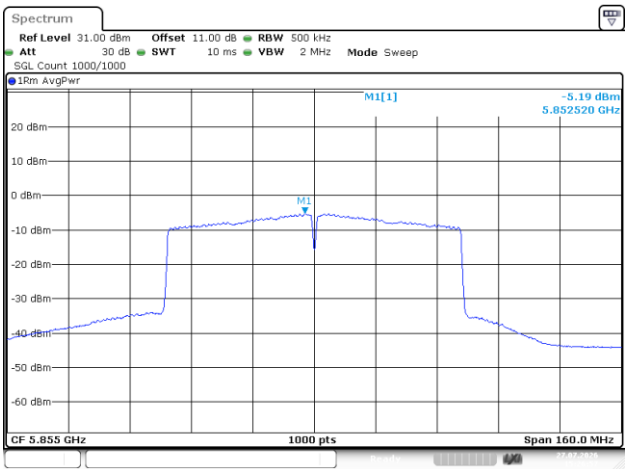


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 15:26:57

802.11ac80_5855MHz_Chain 3

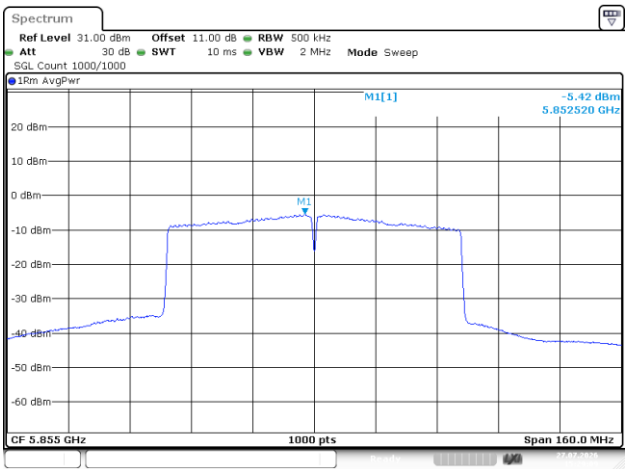


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 15:29:10

802.11ac80_5855MHz_Chain 4

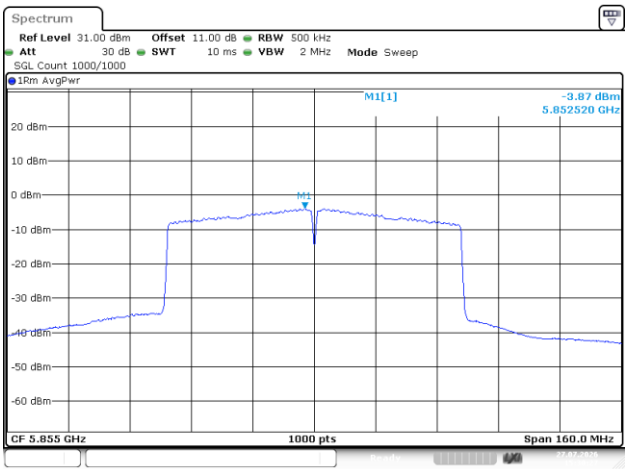


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 15:30:28

802.11ac160_5815MHz_Chain 0

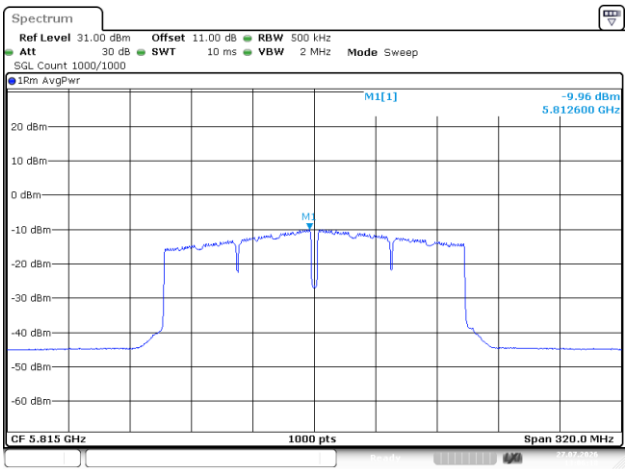


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 13:06:19

802.11ac160_5815MHz_Chain 1

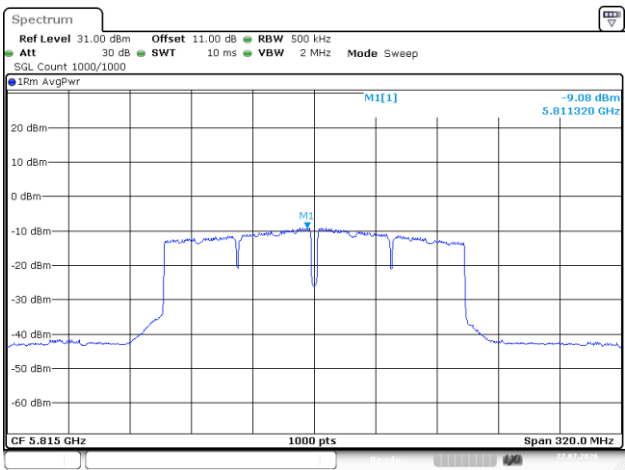


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:02:06

802.11ac160_5815MHz_Chain 2

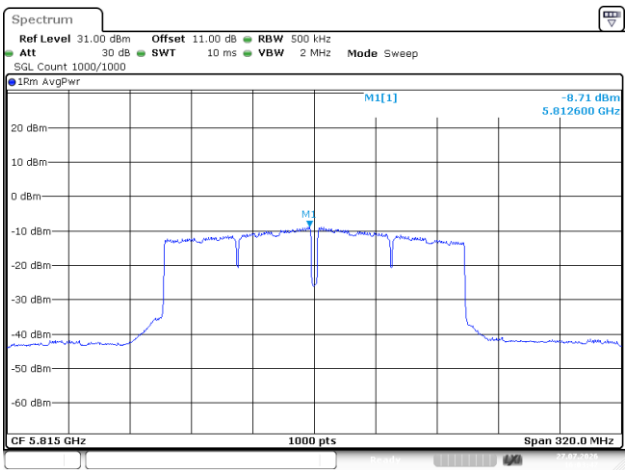


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:03:48


802.11ac160_5815MHz_Chain 3

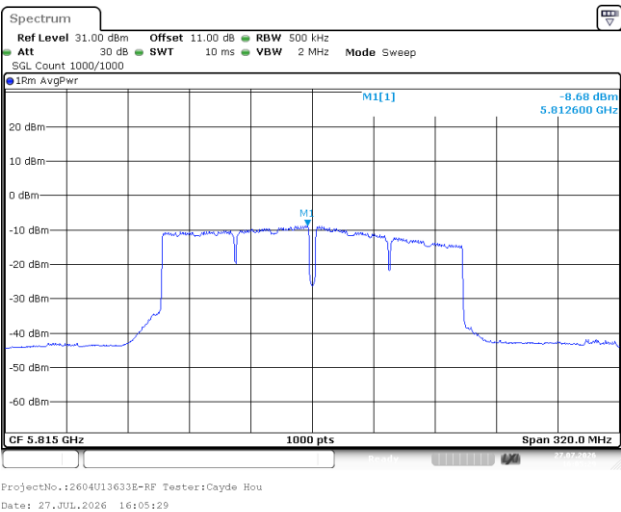


802.11ac160_5815MHz_Chain 4

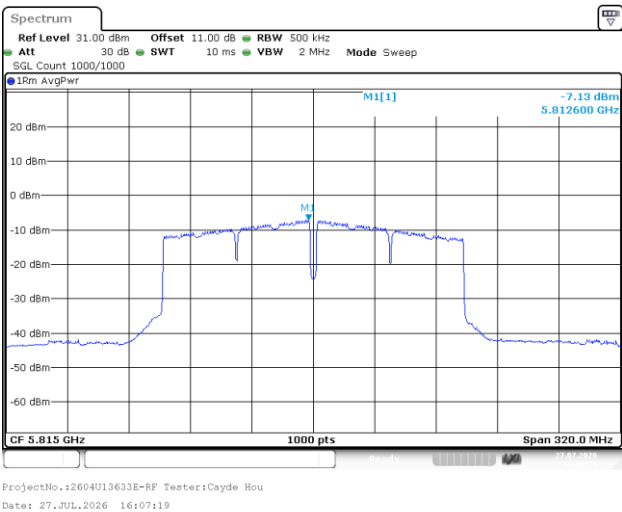


802.11be20_5845MHz_RU_Full_Chain 0

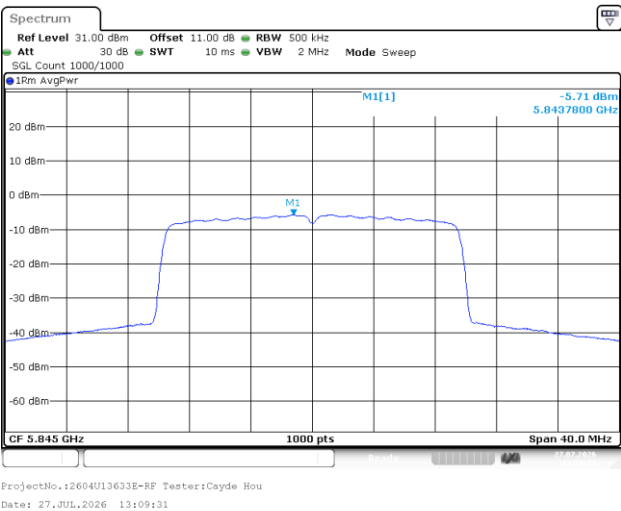


802.11be20_5865MHz_RU_Full_Chain 0

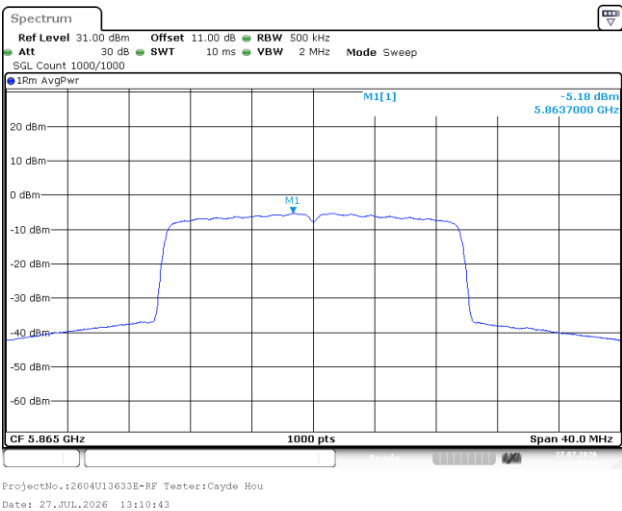


802.11be20_5885MHz_RU_Full_Chain 0

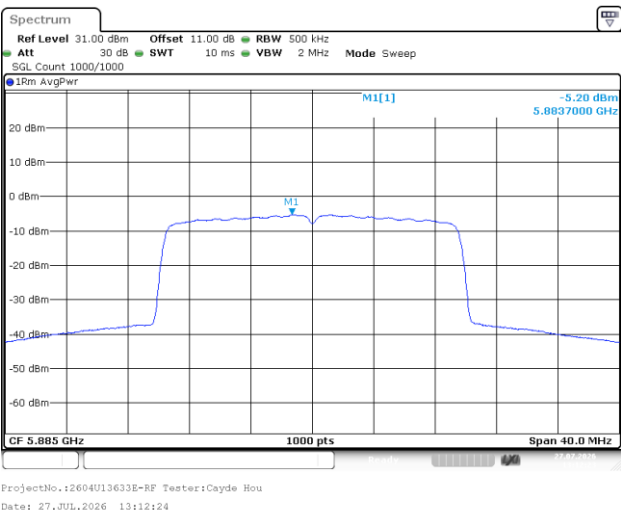

802.11be20_5845MHz_RU_Full_Chain 1

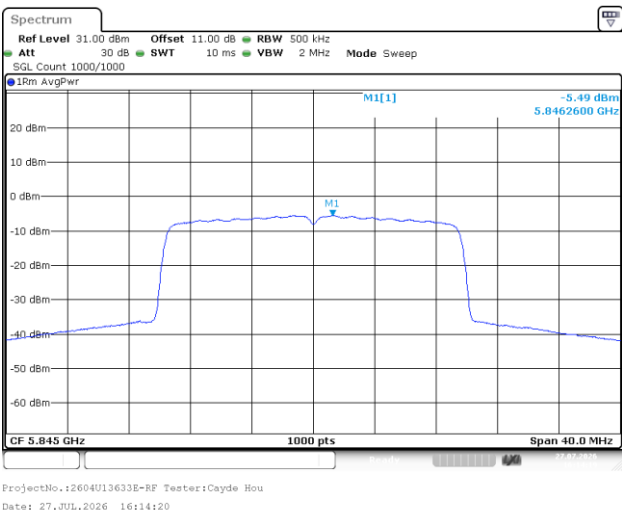


802.11be20_5865MHz_RU_Full_Chain 1

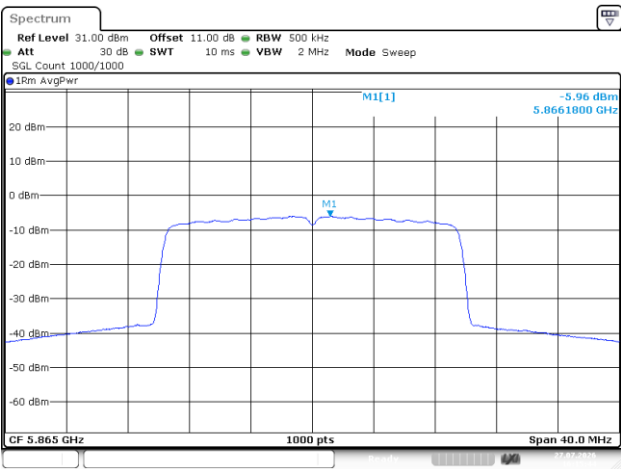


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:15:44

802.11be20_5885MHz_RU_Full_Chain 1

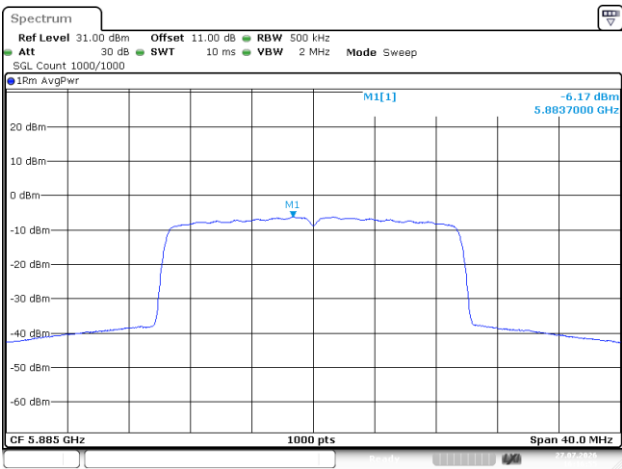


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:16:56

802.11be20_5845MHz_RU_Full_Chain 2

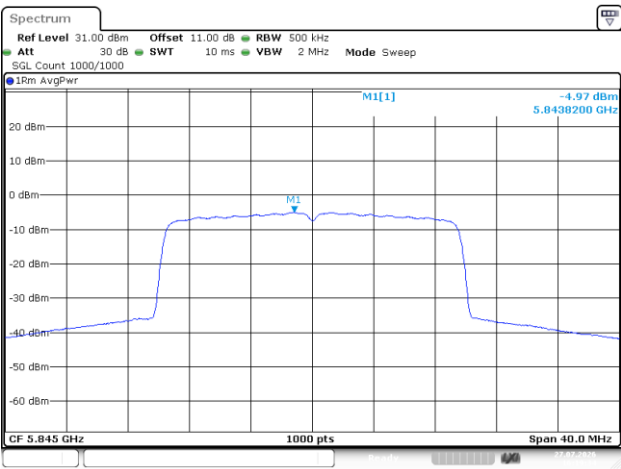


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:19:35

802.11be20_5865MHz_RU_Full_Chain 2

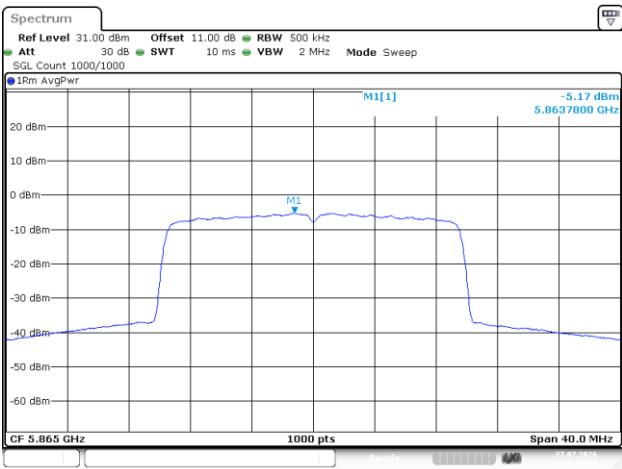


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:22:33

802.11be20_5885MHz_RU_Full_Chain 2

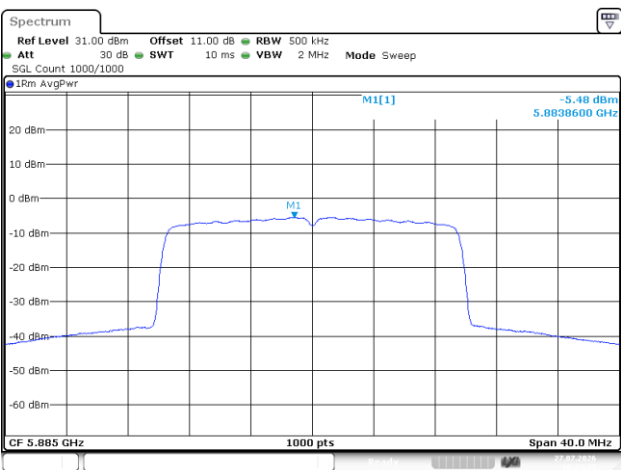


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:24:36

802.11be20_5845MHz_RU_Full_Chain 3

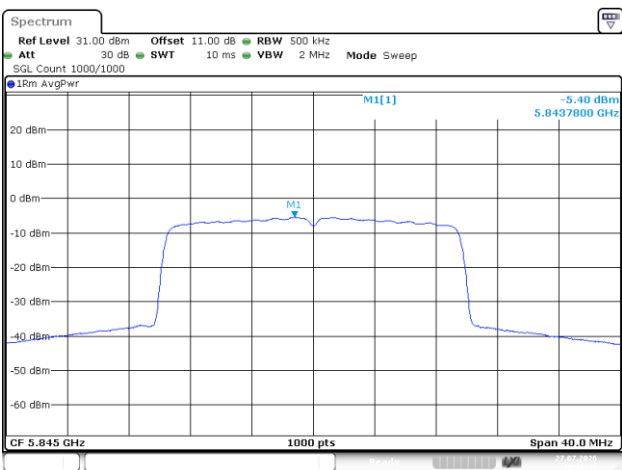


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:26:48

802.11be20_5865MHz_RU_Full_Chain 3

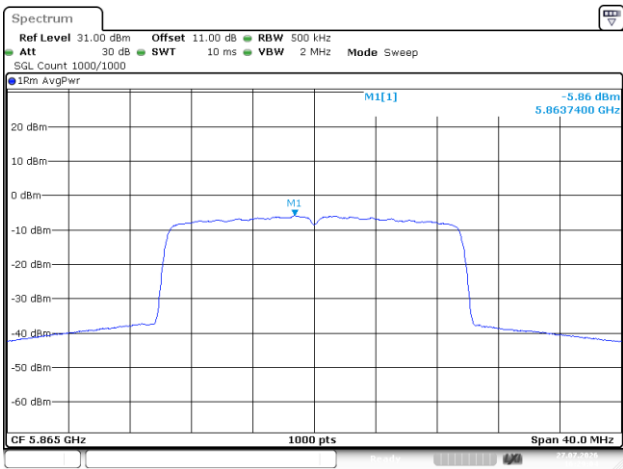


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:29:04

802.11be20_5885MHz_RU_Full_Chain 3

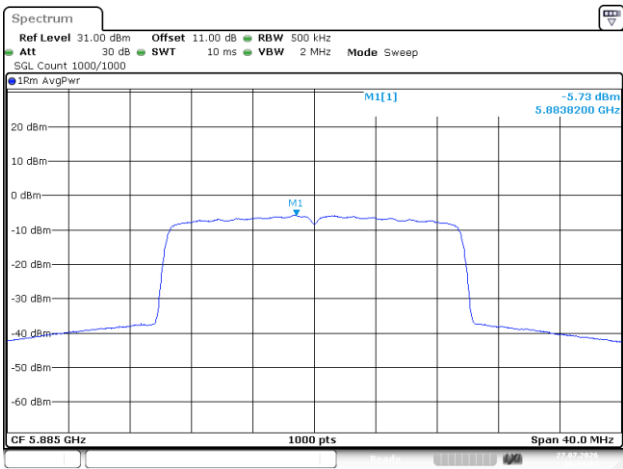


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:30:07

802.11be20_5845MHz_RU_Full_Chain 4

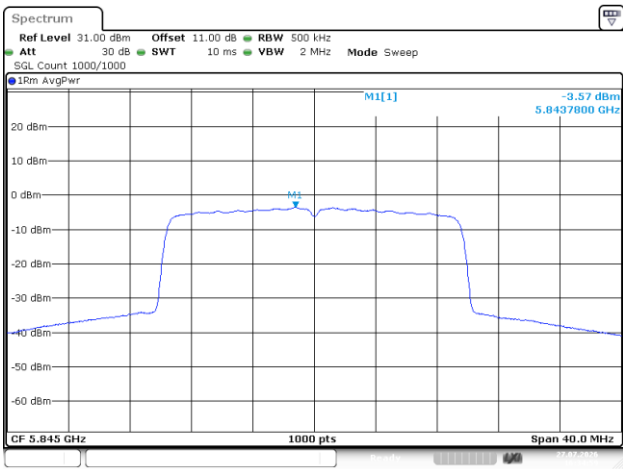


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:35:00

802.11be20_5865MHz_RU_Full_Chain 4

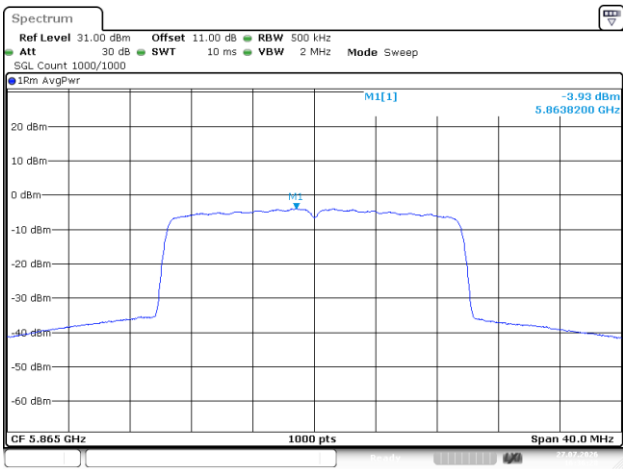


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:36:28

802.11be20_5885MHz_RU_Full_Chain 4

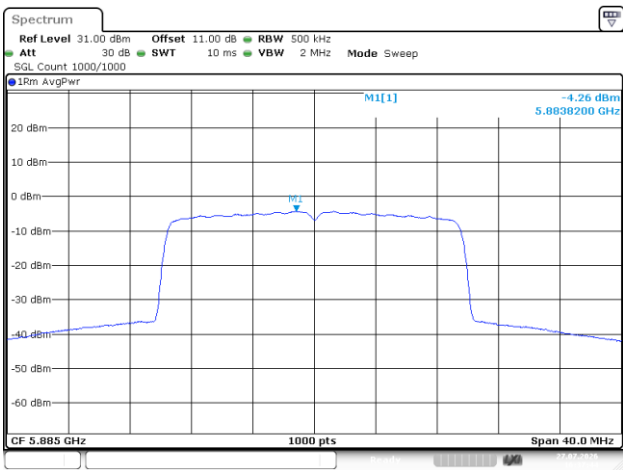


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 16:37:45

802.11be40_5835MHz_RU_Full_Chain 0

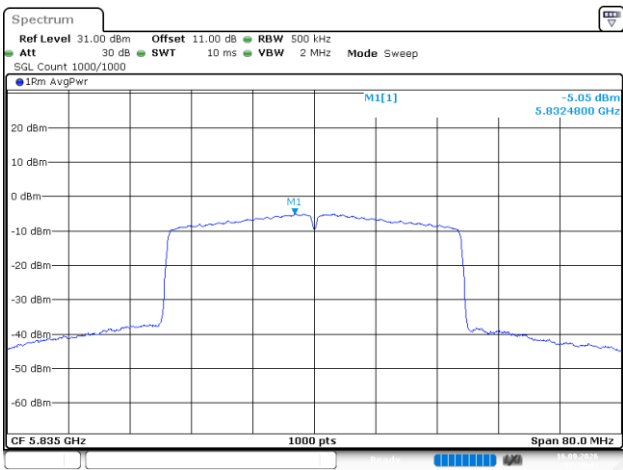


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:38:43

802.11be40_5875MHz_RU_Full_Chain 0

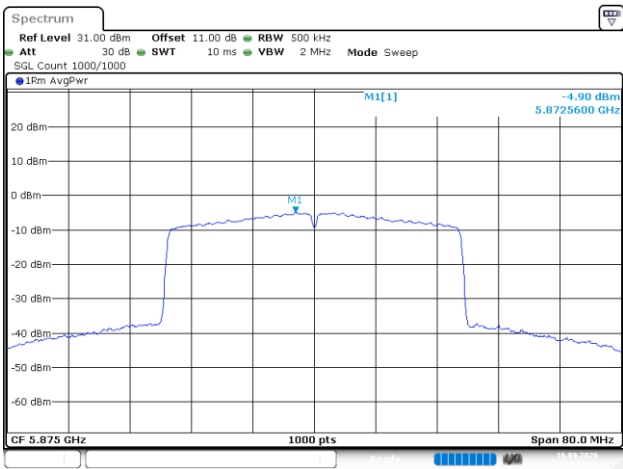


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:39:20

802.11be40_5835MHz_RU_Full_Chain 1

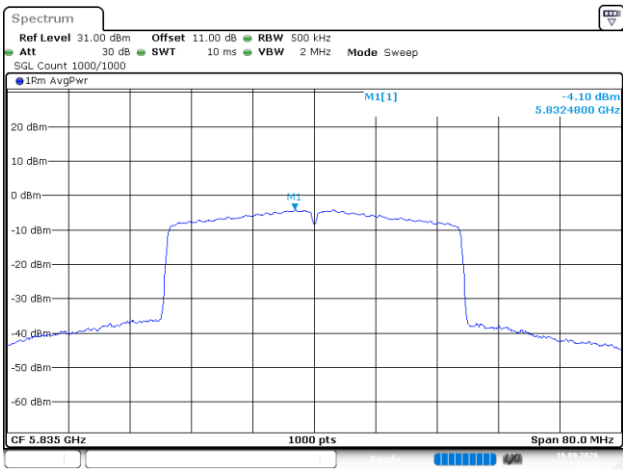


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:40:52

802.11be40_5875MHz_RU_Full_Chain 1

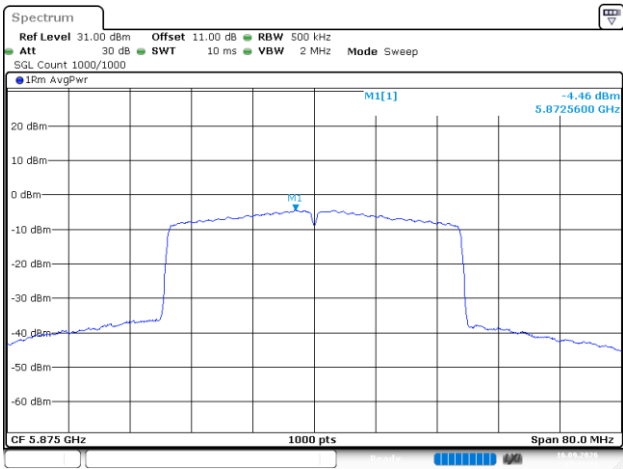


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:41:32

802.11be40_5835MHz_RU_Full_Chain 2

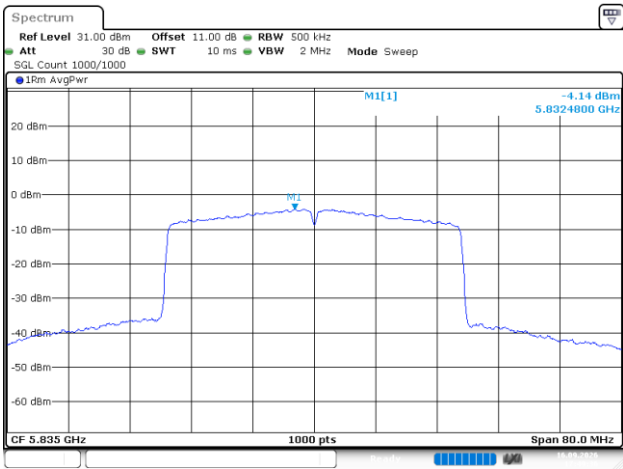


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:49:37

802.11be40_5875MHz_RU_Full_Chain 2

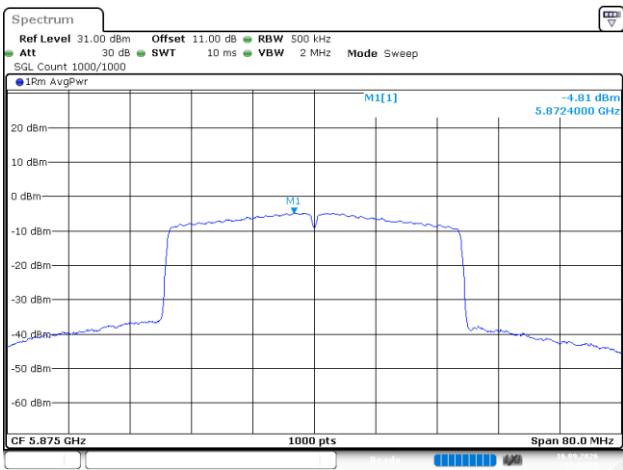


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:50:10

802.11be40_5835MHz_RU_Full_Chain 3

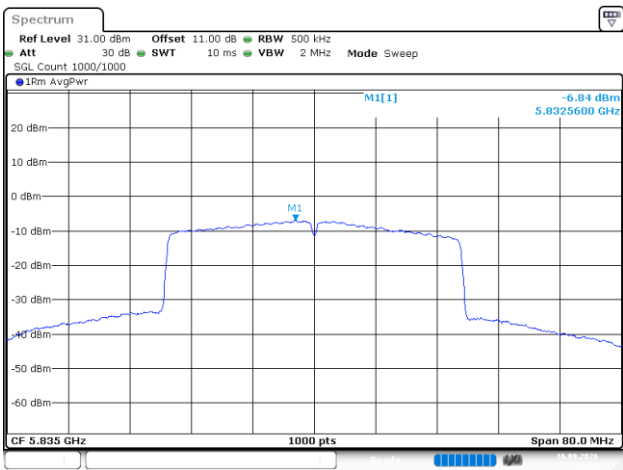


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:51:20

802.11be40_5875MHz_RU_Full_Chain 3

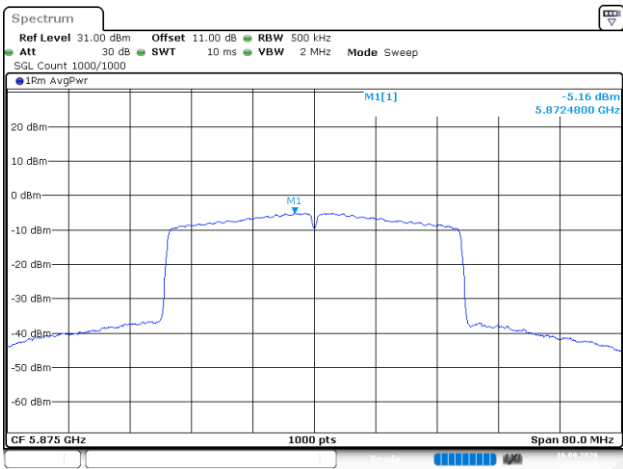


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 17:51:51

802.11be40_5835MHz_RU_Full_Chain 4

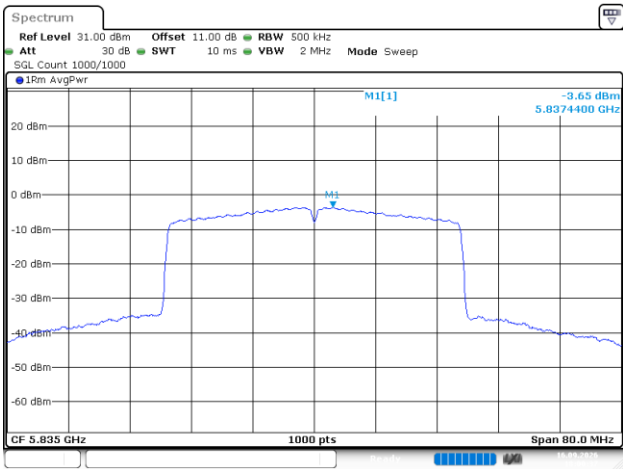


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 18:00:38

802.11be40_5875MHz_RU_Full_Chain 4

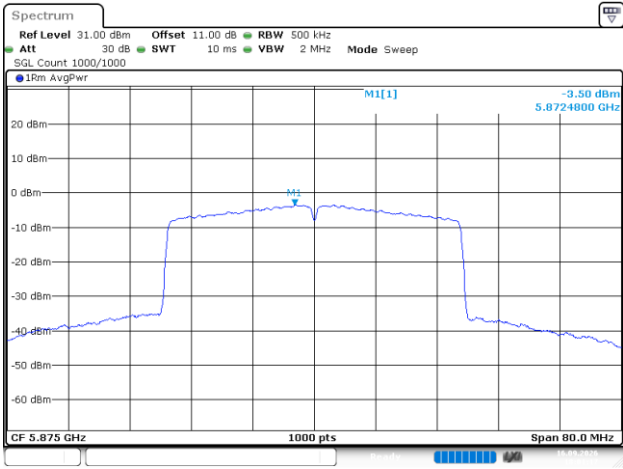


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 16.SEP.2026 18:01:18

802.11be80_5855MHz_RU_Full_Chain 0

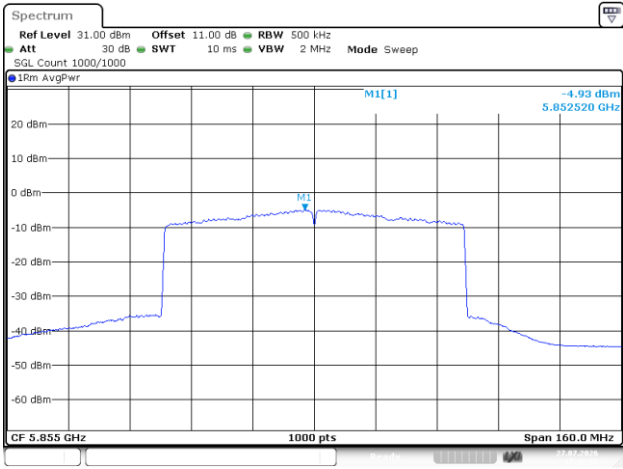


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:42:56

802.11be80_5855MHz_RU_Full_Chain 1

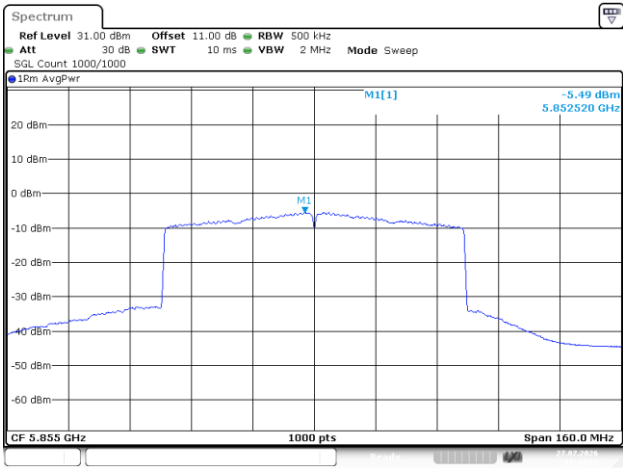


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:44:12

802.11be80_5855MHz_RU_Full_Chain 2

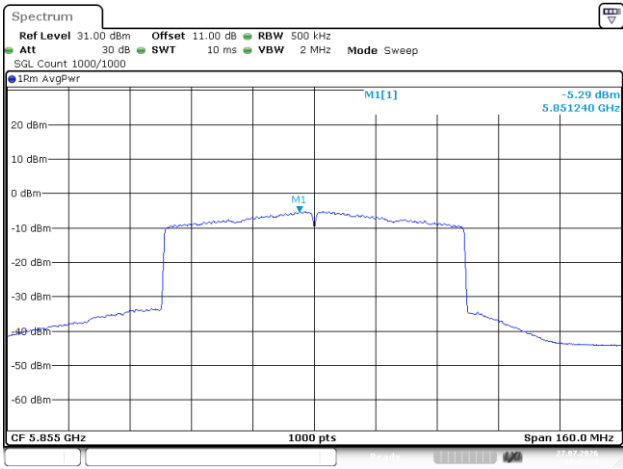


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:45:34

802.11be80_5855MHz_RU_Full_Chain 3

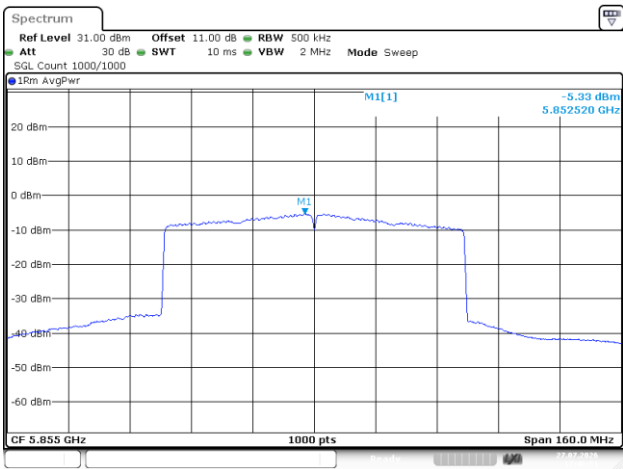


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:46:51

802.11be80_5855MHz_RU_Full_Chain 4

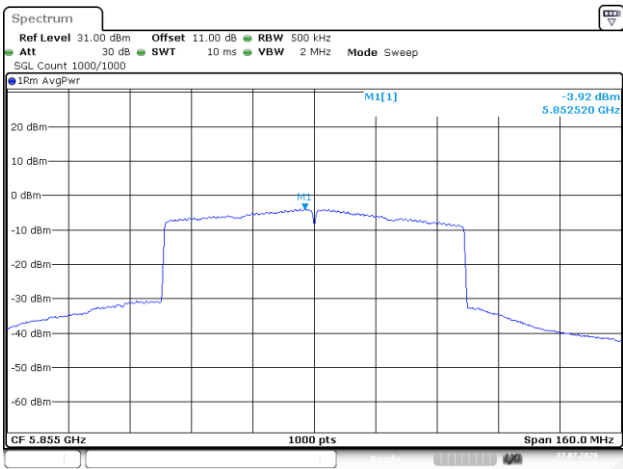


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:48:09

802.11be160_5815MHz_RU_Full_Chain 0

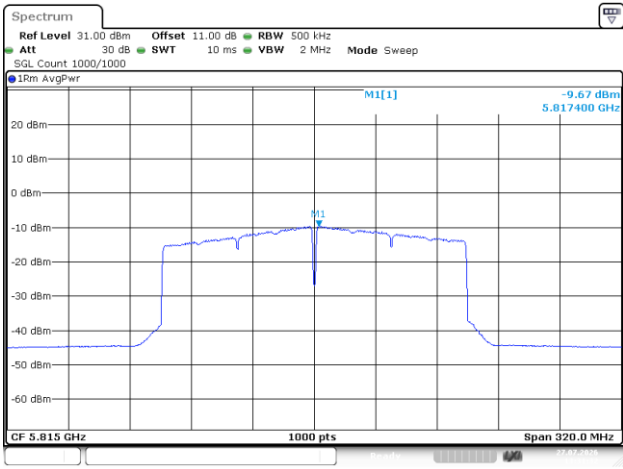


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 13:31:32

802.11be160_5815MHz_RU_Full_Chain 1

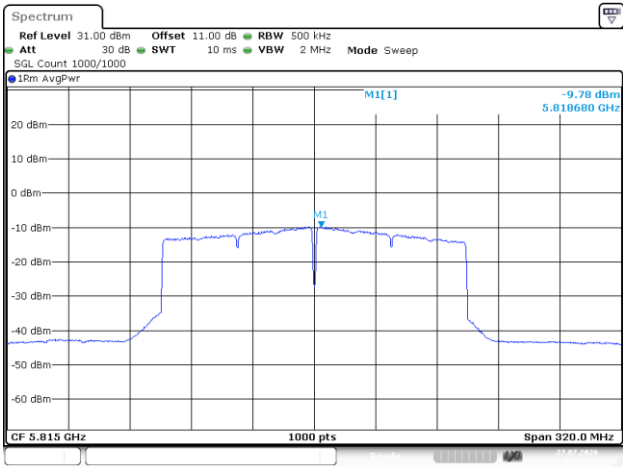


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:18:38

802.11be160_5815MHz_RU_Full_Chain 2

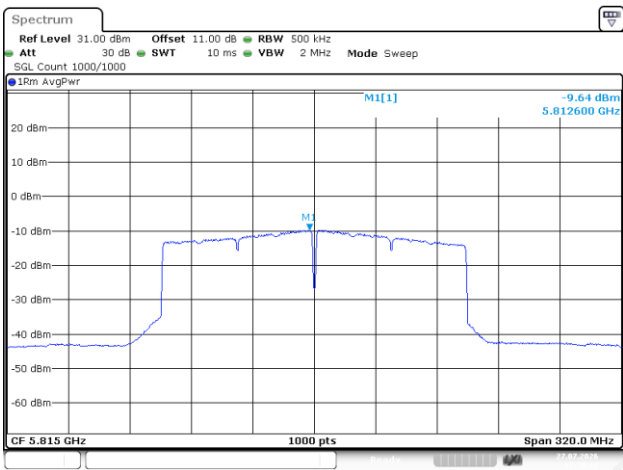


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:20:32

802.11be160_5815MHz_RU_Full_Chain 3

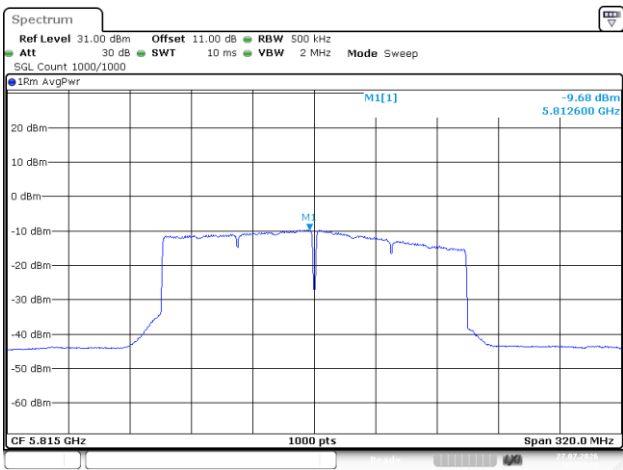

ProjectNo.:2604U13633E-RF Tester:Cayde Hou
Date: 27.JUL.2026 17:22:12

802.11be160_5815MHz_RU_Full_Chain 4

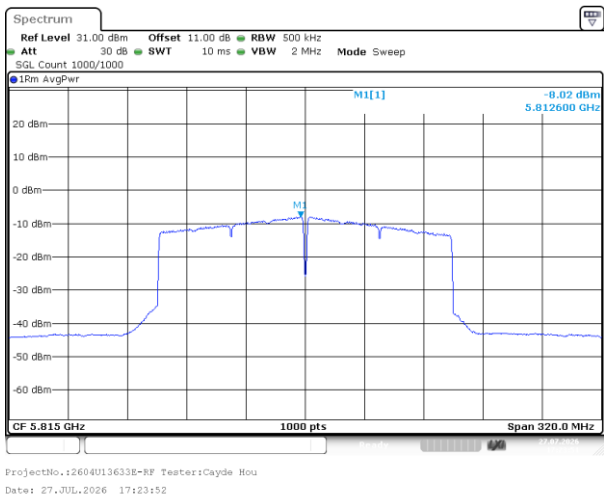

Appendix C.3.5: Duty Cycle


5850-5895MHz

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5865	1.388	1.442	96.26	0.17	720	1
802.11ac20	5865	1.297	1.350	96.07	0.17	771	1
802.11ac40	5835	0.651	0.714	91.18	0.40	1536	2
802.11ac80	5855	0.324	0.377	85.94	0.66	3086	5
802.11ac160	5815	0.324	0.376	86.17	0.65	3086	5
802.11be20_RU_Full	5865	0.317	0.371	85.44	0.68	3155	5
802.11be40_RU_Full	5835	0.318	0.380	83.68	0.77	3145	5
802.11be80_RU_Full	5855	0.303	0.360	84.17	0.75	3300	5
802.11be160_RU_FULL	5815	0.300	0.365	82.19	0.85	3333	5

Duty Cycle = Ton/(Ton+Toff)*100%


5.9G

802.11a_5865MHz

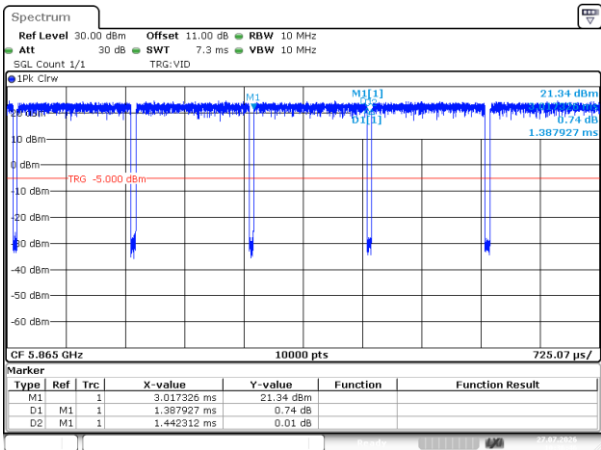


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:36:46

802.11ac20_5865MHz

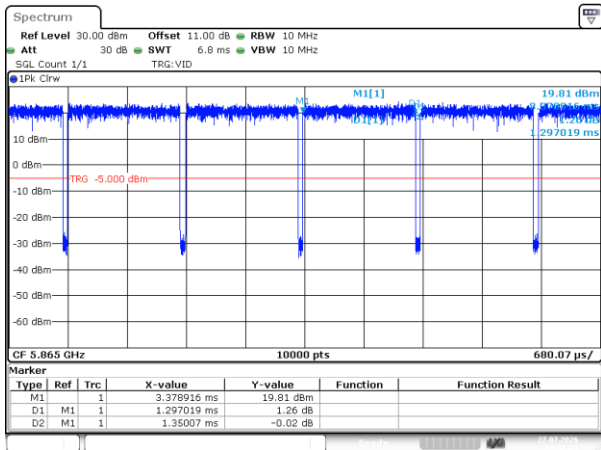


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:37:23

802.11ac40_5835MHz

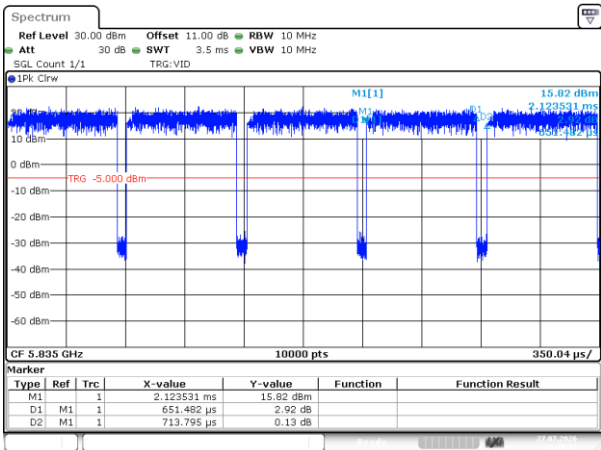


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:39:17

802.11ac80_5855MHz

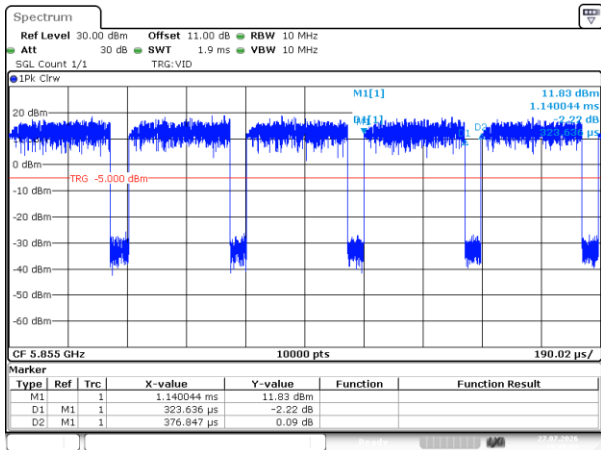


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:40:00

802.11ac160_5815MHz

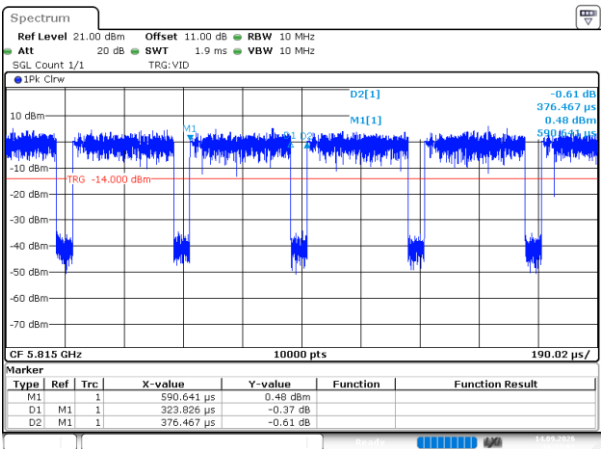


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 14.AUG.2026 16:37:02

802.11be20_5865MHz_RU_Full

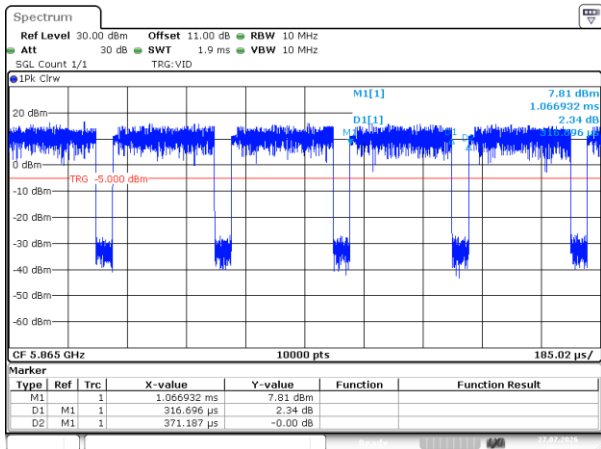


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:53:17

802.11be40_5835MHz_RU_Full

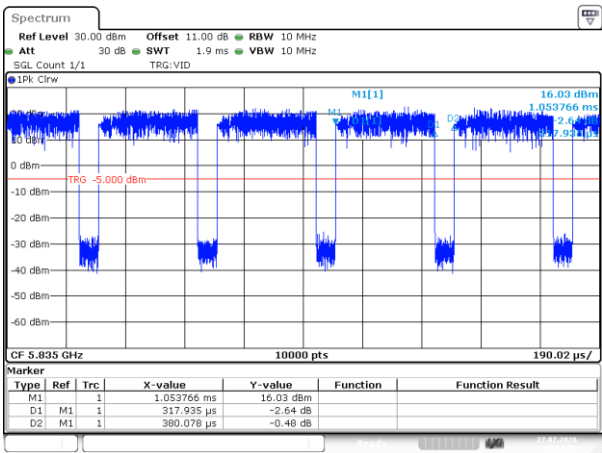


ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:53:57

802.11be80_5855MHz_RU_Full

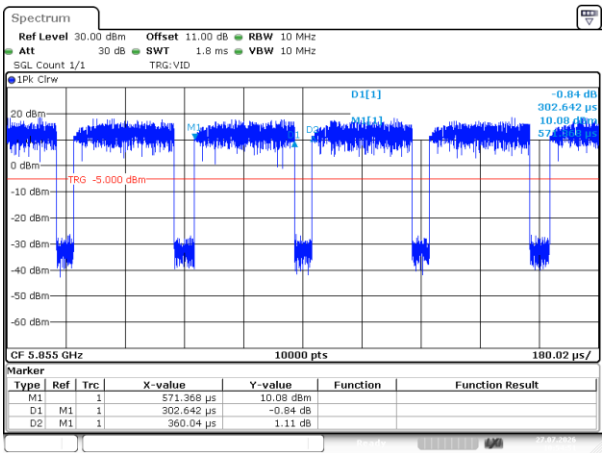

ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:54:51

802.11be160_5815MHz_RU_FULL

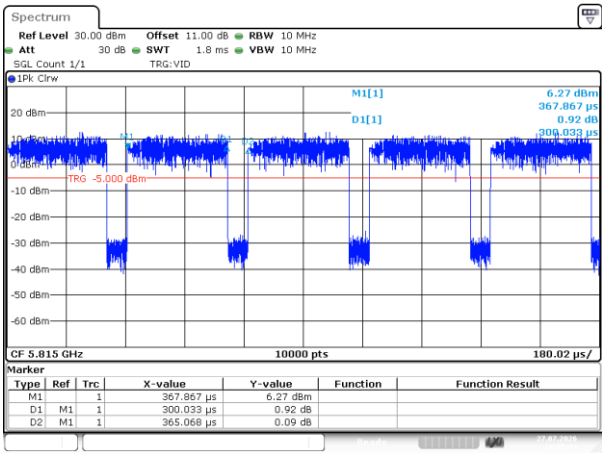

ProjectNo.:2604U13633E-RF Tester:Cayde Hou
 Date: 27.JUL.2026 10:55:43

***** END *****