



AFC DUT TEST HARNESS REPORT

FCC ID : Z8H89FT0082
Equipment : 6094HH
Brand Name : Cambium Networks
Model Name : 6094HH
Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL 60008,
USA
Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK
Standard : 47 CFR FCC Part 15.407

The product was received on Oct. 15, 2025, and testing was started from Nov. 04, 2025 and completed on Nov. 06, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in AFC Device (AFC DUT) Compliance Test Plan Version 1.7 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

1	General Description	6
1.1	Product Feature of Equipment Under Test	6
1.2	Antenna Information	7
1.3	Table for EUT Information and Supports Function.....	9
1.4	Table for Radio Function.....	9
1.5	Table for Permissive Change.....	9
1.6	Accessories.....	10
1.7	Support Equipment	10
1.8	Applicable Standards	10
1.9	Testing Location.....	10
2	Measurement Environment	11
2.1	AFCD General Capabilities Declaration.....	11
2.2	Test Configuration	12
3	Protocol Test Results	14
3.1	Successful Registration and Spectrum Access Request	14
3.2	Unsuccessful Spectrum Access Request	16
3.3	Successful Spectrum Access Update	17
3.4	Unsuccessful Spectrum Access Update	19
3.5	Unsuccessful Server Validation	21
4	Test Equipment and Calibration Data	22
5	Measurement Uncertainty	23

Appendix A. Tools Report

Appendix B. DUT Spectrum Inquiry Request/Response Logs

Appendix C. RF Measurement Plots

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_7 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Case Name	Result (PASS/FAIL)	Remark
AFC capability - Inquired Frequency				
Test Group: Inquired Frequency - Always				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1	PASS	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_160MHz_10614_1	N/A	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDSA32_Frequency_10615_1	PASS	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSA33_Frequency_10616_1	PASS	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1	PASS	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_320MHz_10713_1	N/A	-
AFC capability - Inquired Channel				
Test Group: Inquired Channel - Always				
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_20MHz_10618_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_40MHz_10619_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_80MHz_10620_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_160MHz_10621_1	N/A	-
-	3.2.4	CT_AFC_SP_AP_AFCDSA32_Channel_10622_1	N/A	-
-	3.3.4	CT_AFC_SP_AP_AFCDSA33_Channel_10623_1	N/A	-
-	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Channel_10624_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_320MHz_10714_1	N/A	-
AFC capability - Inquired Frequency & Channel				
Test Group: Inquired Frequency and Channel - Always				
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1	N/A	-
-	3.2.4	CT_AFC_SP_AP_AFCDSA32_FrequencyChannel_10629_1	N/A	-
-	3.3.4	CT_AFC_SP_AP_AFCDSA33_FrequencyChannel_10630_1	N/A	-
-	3.4.4	CT_AFC_SP_AP_AFCDUAU34_FrequencyChannel_10631_1	N/A	-
-	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_320MHz_10715_1	N/A	-
AFC capability - Server Validation - Mandatory				
Test Group: Server Validation - Always				
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1	PASS	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen**Report Producer: Sandy Chuang**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature of Equipment Under Test	
Power Type	From PoE
EUT Type	☐ Standard Power Access Point with Proxy ☒ Standard Power Access Point without Proxy ☐ Fixed Client with Proxy ☐ Fixed Client without Proxy
Bandwidth (MHz)	5 / 40
Condition of EUT	☐ Indoor ☒ Outdoor
Professional Installation	☒ Yes ☐ No
DUT Firmware version	-
DUT Software version	CANOPY 24.2.2 (Build AFC-TEST-2) BHUL450
DUT Hardware version	P16
Proxy Firmware version	-
Proxy Software version	-
Proxy Hardware version	-

Note: The above information was declared by manufacturer.



1.2 Antenna Information

For EUT 1

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Cambium	Canopy V Dish Antenna	Dish	RP-SMA	Note 1
	Cambium	Canopy V Dish Antenna	Dish	RP-SMA	
	Cambium	Canopy V Dish Antenna	Dish	RP-SMA	
	Cambium	Canopy V Dish Antenna	Dish	RP-SMA	

Note 1:

Ant.	Port					Gain (dBi)	
	WLAN 5GHz			WLAN 6GHz		WLAN 5GHz	WLAN 6GHz
	R1	R2	R1+R2	R1	R2		
1	-	1	3	-	1	21.922	21.892
	-	2	4	-	2	21.853	21.898
	2	-	2	2	-	21.893	21.893
	1	-	1	1	-	21.851	21.851

For at any elevation angle above 30 degrees

Ant.	Port		Gain (dBi)	
	WLAN 6GHz		WLAN 6GHz	
	R1	R2		
1	-	1	4.42	
	-	2		
	2	-	2.76	
	1	-		

For EUT 2

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 5GHz							WLAN 5GHz
	R1	R2	R1+R2					
1	-	1	3	Cambium	Canopy V Patch Antenna	Patch	RP-SMA	3.20
	-	2	4	Cambium	Canopy V Patch Antenna	Patch	RP-SMA	3.20
	2	-	2	Cambium	Canopy V Patch Antenna	Patch	RP-SMA	4.20
	1	-	1	Cambium	Canopy V Patch Antenna	Patch	RP-SMA	4.70

Note 2: An EUT will only be equipped with one type of antenna.

Note 3: The above information was declared by manufacturer.

Note 4: **For 5GHz function:**

For Radio 1 (R1) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For Radio 2 (R2) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For Radio 1 + Radio 2 (R1+R2) (2TX/2RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 6GHz function:

For Radio 1 (R1) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.
Port 1~2 could transmit/receive simultaneously.

For Radio 2 (R2) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.
Port 1~2 could transmit/receive simultaneously.

Note 5: Directional gain information.

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where;

Dish Antenna (Cross-Polarized Antenna)

5G UNII-1 G1 = 21.893 dBi; G2 = 21.851 dBi;

5G UNII-3 G1 = 21.922 dBi; G2 = 21.853 dBi;

6E UNII-5 G1 = 21.851 dBi; G2 = 21.893 dBi;

6E UNII-7 G1 = 21.892 dBi; G2 = 21.898 dBi;

5G UNII-1 DG = 21.893 dBi

5G UNII-3 DG = 21.922 dBi

6E UNII-5 DG = 21.893 dBi

6E UNII-7 DG = 21.898 dBi

Patch Antenna (Cross-Polarized Antenna)

5G UNII-1 G1 = 4.20 dBi; G2 = 4.70 dBi;

5G UNII-3 G1 = 3.20 dBi; G2 = 3.20 dBi;

5G UNII-1 DG = 4.70 dBi

5G UNII-3 DG = 3.20 dBi



1.3 Table for EUT Information and Supports Function

EUT	Antenna Type	Support	Function	P to P/MP	WLAN 6GHz Equipment Class
1	Dish	WLAN 5GHz	Master	P to P	N/A
		WLAN 6GHz	Master	P to P	6SD
		WLAN 6GHz	Client	P to P	6FC
				P to P/MP	6FX
2	Patch	WLAN 5GHz	Master	P to P	N/A

Note: The above information was declared by manufacturer.

1.4 Table for Radio Function

Radio (R)	Function
R1	Support 5GHz UNII 1 and 6GHz UNII 5
R2	Support 5GHz UNII 3 and 6GHz UNII 7

Note: The above information was declared by manufacturer.

1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: 380301-03.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add the standard power access point in P to P mode for EUT 1 through a software change.	AFC DUT TEST HARNESS



1.6 Accessories

Wall bracket*1 (For EUT 1 only)

1.7 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Fixed client	Cambium Networks	canopy 4x4 SM	Z8H89FT0082
D	Notebook	ASUS	P2530U	N/A
E	PoE	Cambium Networks	NET-P60-56IN	N/A

Note: The PoE was for measurement only and would not be marketed. Its information is shown as below:

Equipment	Brand Name	Model Name
PoE	Cambium Networks	NET-P60-56IN

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ AFC Device (AFC DUT) Compliance Test Plan Version 1.7
- ♦ FCC KDB 987594 D05 v01r01

1.9 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Caster Chang	23.4~23.48 / 57~60	Nov. 04, 2025~ Nov. 06, 2025



2 Measurement Environment


Measurement Environment Information	
AFC DUT Test Harness version	2.0.65.184

2.1 AFCD General Capabilities Declaration


Item	Question	Vendor Response
1	AFC DUT Type	Standalone AP
2	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Frequency Range field?	Yes
3	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Channels fields?	No
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's default inquiry type?	N/A
5	Does the AFC DUT need to be supplied with BSS configuration parameters?	No
6	Does the AFC DUT manufacturer attest to AFC DUT compliance with rules for LPI operation?	No
7	Does the AFC DUT need to be supplied with mandatory registration information to formulate an Available Spectrum Inquiry Request	No
8	If the Answer to Item 7 is "Yes". What is the geographic Supported by the AFC DUT?	N/A
9	Does the AFC DUT supports 160 MHz channel width operation?	No
10	Which method does AFC DUT acting as a Fixed Client uses for sending an Available Spectrum Inquiry Request?	N/A
11	Does the AFC DUT supports 320 MHz channel width operation?	No

Note: The above information was declared by manufacturer.

2.2 Test Configuration

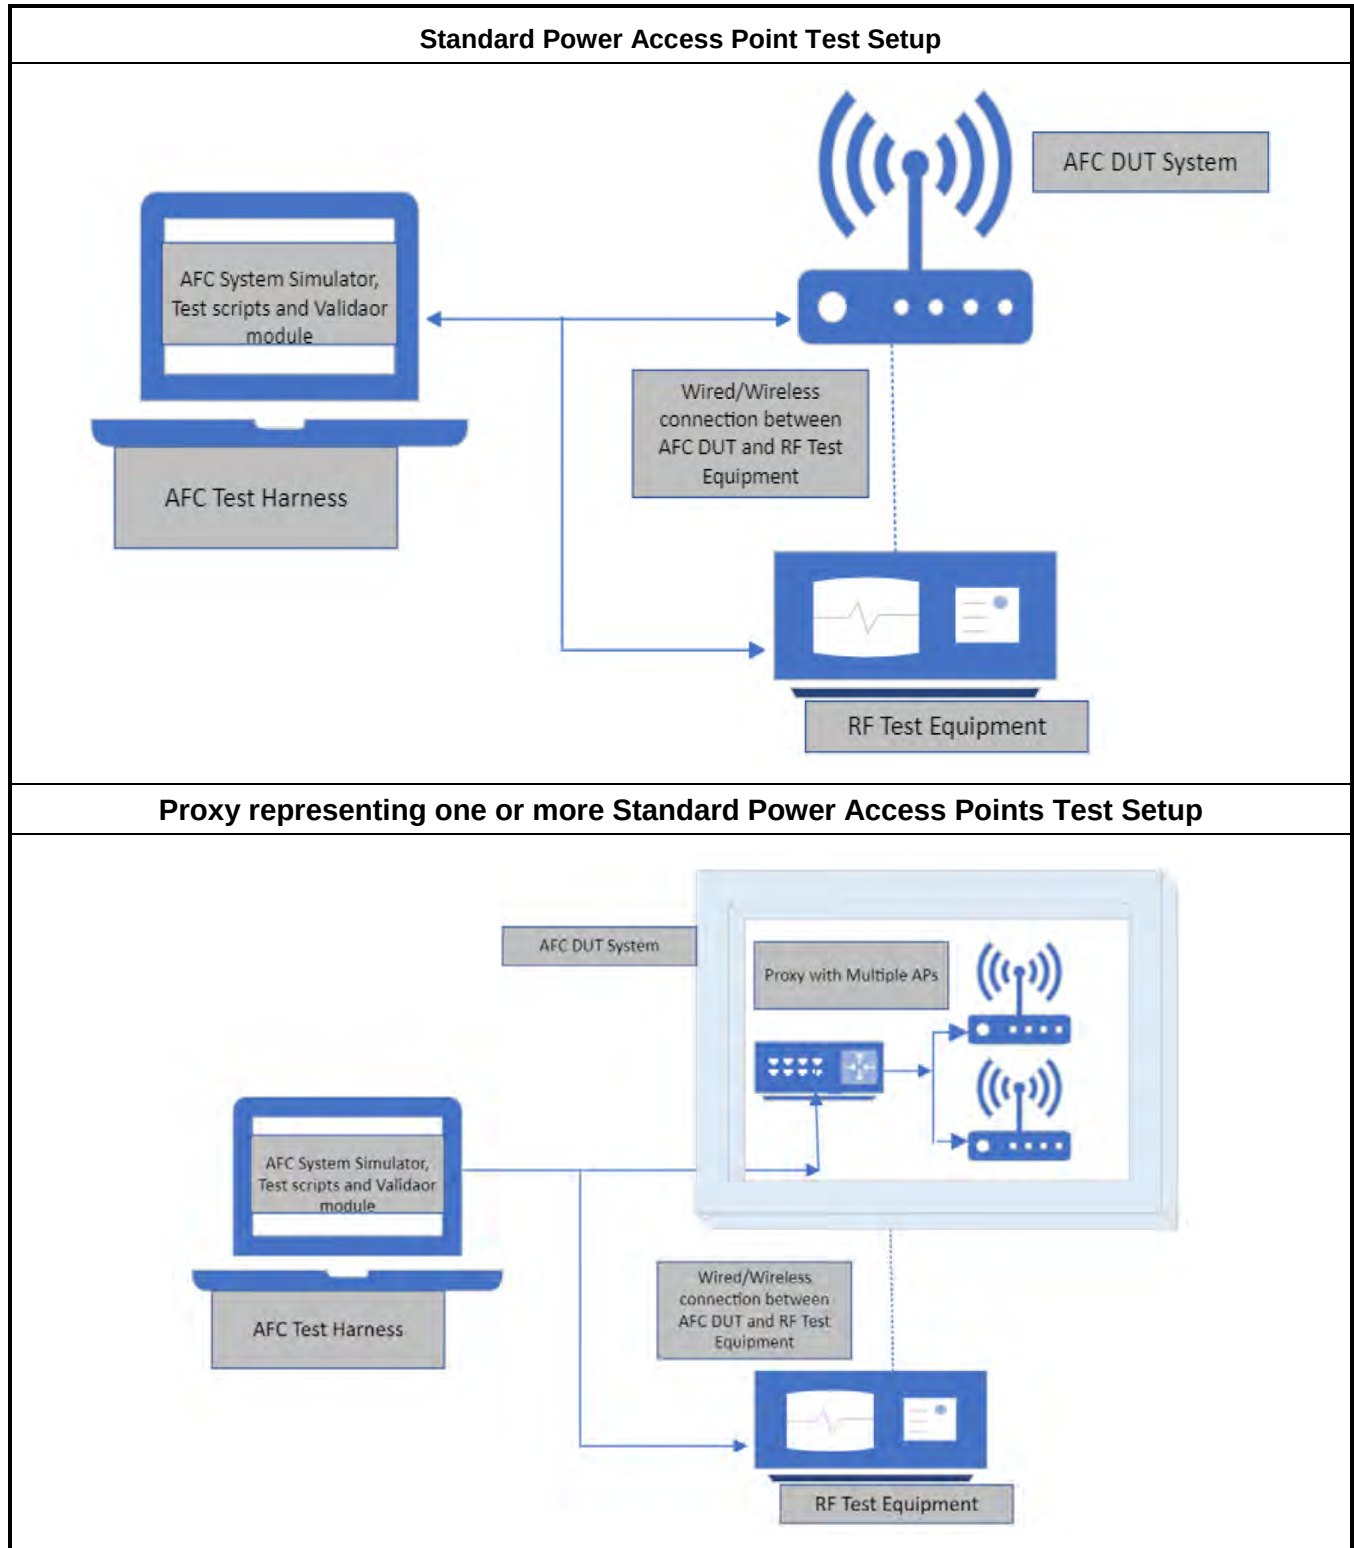

Fixed Client Device Test Setup

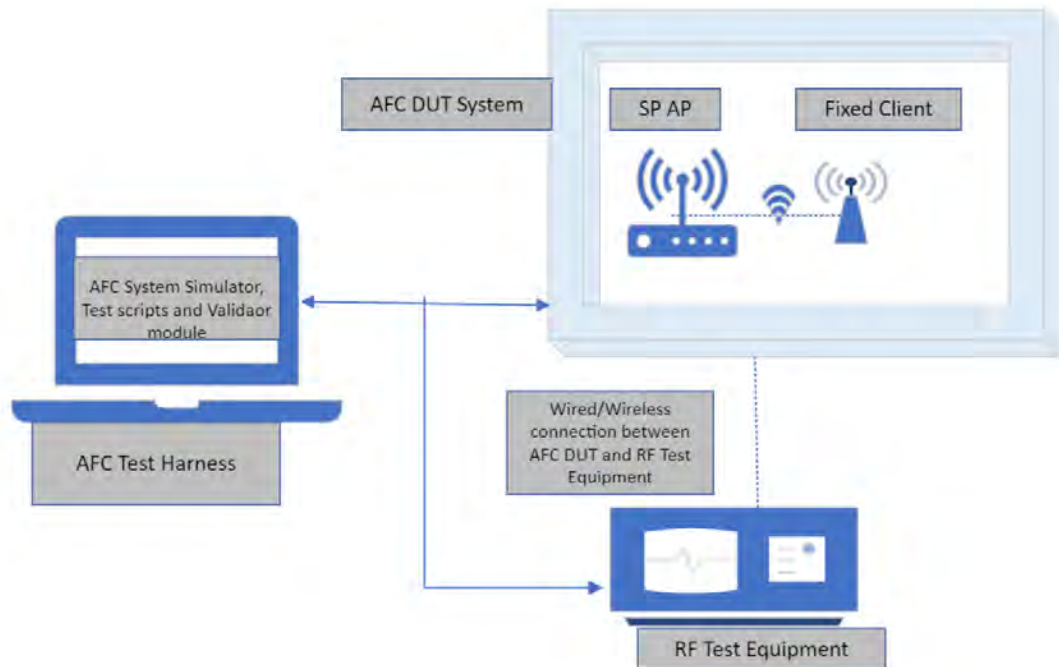



3 Protocol Test Results

3.1 Successful Registration and Spectrum Access Request

3.1.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates the presence of mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
9	AFC DUT Test Harness validates the presence of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5.
11	Wait for 5 minutes (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the latest Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.



18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds
20	RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
21	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods
22	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
23	AFC DUT Test Harness validates the presence of mandatory registration information
24	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 17.
25	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
	Wait for 60 seconds (configurable)
	RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

3.1.2 Test Result

Refer as Appendix A~C



3.2 Unsuccessful Spectrum Access Request

3.2.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 7
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
6	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment monitors the output of the AFC DUT to confirm the following: • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test
8	The AFC DUT set to Initial Pre-test State.
9	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
11	AFC DUT Test Harness validates mandatory registration information.
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor
13	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

3.2.2 Test Result

Refer as Appendix A~C



3.3 Successful Spectrum Access Update

3.3.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the preceding steps, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
7	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the following and STOP the test • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 9
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5. • During the 60 seconds wait time: ▪ For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits ▪ For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band
11	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.



14	If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel and STOP the test. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 21
22	AFC DUT Test Harness evaluates validity of mandatory registration information
23	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from step 17. During the 60 seconds wait time, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

3.3.2 Test Result

Refer as Appendix A~C



3.4 Unsuccessful Spectrum Access Update

3.4.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the DUT with AFC System URL and server root certificate. Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields.
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies
7	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds • If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the DUT to verify the following and STOP the test: ▪ For SP only operation, AFC DUT does not transmit in the band, ▪ For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. • If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 8
9	AFC DUT Test Harness evaluates validity of mandatory registration information.
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
11	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment monitors the output of the AFC DUT to confirm that: For SP only operation, AFC DUT does not transmit in the band. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 9 declaration), configure the DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges



	and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 9 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel., If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 22 else STOP the test
22	AFC DUT Test Harness evaluates validity of mandatory registration information.
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

3.4.2 Test Result

Refer as Appendix A~C



3.5 Unsuccessful Server Validation

3.5.1 Test Procedure

Step	Description
1	The AFC DUT set to Initial Pre-test State. If needed (see Table 9 declaration), configure the AFC DUT with BSS parameters per Table 14 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT Test Harness with TLS configuration that is the same as the default configuration defined in Section 2.3.1 except for the following: - Run 1: A different server certificate (and private key) with SAN domain name entry "badafc.com" (i.e. that does not match AFC system URL's domain name); signed by the same root certificate as per Section 2.3.1 - Run 2: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1, but the certificate is signed by a different root certificate - Run 3: A different server certificate (and private key) with SAN domain name entry "wfatestorg.org" only (i.e. SAN domain name only matches suffix of AFC server's hostname); signed by the same root certificate as per Section 2.3.1 - Run 4: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1 signed by the same root certificate as per Section 2.3.1, but the server certificate is revoked as indicated in stapled OCSP response - Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is disabled and CRL/OCSP servers are not available - Run 6: Same configuration as per Section 2.3.1, except stapled OCSP response has expired and CRL/OCSP servers are not available - Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher suite "eNULL" (no encryption) is enabled - Run 8: N/A (same configuration as per Section 2.3.1) Configure the AFC DUT with the AFC System URL and the following root certificate: - Runs 1-7: Root certificate as per Section 2.3.1 - Run 8: No root certificate Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum Inquiry Request is sent to it.
3	Steps 1 and 2 are repeated for each of the remaining Runs

3.5.2 Test Result

Refer as Appendix A



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2025	May 26, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission	2.5 dB	Confidence levels of 95%

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	Cambium Networks
DUT Product Model	6094HH

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(v)	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1 (Unsuccessful server validation)	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1 (Unsuccessful spectrum access update)	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	CT_AFC_SP_AP_AFCDUAU33_Frequency_10616_1 (Successful spectrum access update)	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1 (Unsuccessful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1 (Successful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1 (Successful registration and spectrum access request)	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1 (Unsuccessful server validation)
 TestResult: PASS
 Band: 6GHz

Measurement Name	Description	Value	Validation Result
------------------	-------------	-------	-------------------

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS
--------------------------------------	---	-------	------

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1 (Unsuccessful server validation)
TestResult:PASS
Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_ServerValidation_AP_AFCDSUV35_NonMatchSAN_10632_1 (Unsuccessful server validation)
 TestResult: PASS
 Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT_AFC_SP_AP_AFCDAU34_Frequency_10617_1 (Unsuccessful spectrum access update)
 TestResult: PASS
 Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (23 dBm/MHz PSD) on channel 37 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in the Spectrum Inquiry Response	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1 (Successful spectrum access update)
 TestResult: PASS
 Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION_1	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (15.3 dBm/MHz PSD) on channel 5 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions	true	PASS

	limits in adjacent frequencies		
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_SP_OPERATION_2	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (19.8 dBm/MHz PSD) on channel 85 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1 (Unsuccessful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditions in the Spectrum Inquiry Response	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1 (Successful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (8.7 dBm/MHz PSD) on channel center frequency index 167 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS

AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (8.5 dBm/MHz PSD) on channel center frequency index 55 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1 (Successful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (9.0 dBm/MHz PSD) on channel center frequency index 59 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (21.5 dBm/MHz PSD) on channel center frequency index 139 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1 (Successful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurement Name	Description	Value	Validation Result
------------------	-------------	-------	-------------------

AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (8.1 dBm/MHz PSD) on channel 161 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (10.3 dBm/MHz PSD) on channel 5 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

AFC capability - Inquired Frequency**CT_AFC_SP_AP_AFCRSA31_Frequency_20MHz_10611_1**

2025-11-04T06:26:43Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "594",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "847016844",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "latitude": 24.845001,
          "longitude": 121.019426
        },
        "majorAxis": 16,
        "minorAxis": 16,
        "orientation": 0
      }
    }
  }
}
```

```
    },
    "elevation": {
      "height": 0.0,
      "heightType": "AMSL",
      "verticalUncertainty": 26
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ]
}
]
```

2025-11-04T06:26:43Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6365,
            "lowFrequency": 6345
          },

```

```
"maxPsd": 14.5
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 17.5
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 8.2
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 9.9
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 18.1
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 16.2
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 12.3
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 8.9
},
{
  "frequencyRange": {
    "highFrequency": 6685,
    "lowFrequency": 6665
  },
  "maxPsd": 18.6
},
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 18.8
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 16.6
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6745,
        "lowFrequency": 6725
      },
      "maxPsd": 10.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
      },
      "maxPsd": 8.1
    },
    {
      "frequencyRange": {
        "highFrequency": 6785,
        "lowFrequency": 6765
      },
      "maxPsd": 15.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6805,
        "lowFrequency": 6785
      },
      "maxPsd": 17.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6825,
        "lowFrequency": 6805
      },
      "maxPsd": 12.9
    }
  ],
  "requestId": "847016844",
  "availabilityExpireTime": "2025-11-05T06:26:43Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
```

```
}  
],  
"version": "1.4"  
}
```

```
##### 2025-11-04T06:48:55Z #####
```

```
{  
  "headers": {  
    "Host": "testserver.wfatestorg.org",  
    "Accept": "*/*",  
    "Content-Type": "application/json",  
    "X-Forwarded-For": "192.168.0.2",  
    "X-Forwarded-Host": "testserver.wfatestorg.org",  
    "X-Forwarded-Server": "testserver.wfatestorg.org",  
    "Content-Length": "594",  
    "Connection": "Keep-Alive"  
  },  
  "body": {  
    "version": "1.4",  
    "availableSpectrumInquiryRequests": [  
      {  
        "requestId": "847016845",  
        "deviceDescriptor": {  
          "serialNumber": "02-04-56-00-01-23",  
          "certificationId": [  
            {  
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",  
              "id": "Z8H89FT0082"  
            }  
          ]  
        }  
      ]  
    },  
    "location": {  
      "ellipse": {  
        "center": {  
          "latitude": 24.845001,  
          "longitude": 121.019426  
        },  
      },  
    }  
  }  
}
```

```
        "majorAxis": 16,
        "minorAxis": 16,
        "orientation": 0
    },
    "elevation": {
        "height": 0.0,
        "heightType": "AMSL",
        "verticalUncertainty": 26
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
]
}
]
}
}
```

2025-11-04T06:48:56Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
```

```
        "highFrequency": 5965,
        "lowFrequency": 5945
    },
    "maxPsd": 12.5
},
{
    "frequencyRange": {
        "highFrequency": 5985,
        "lowFrequency": 5965
    },
    "maxPsd": 10.3
},
{
    "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
    },
    "maxPsd": 12.4
},
{
    "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
    },
    "maxPsd": 17.5
},
{
    "frequencyRange": {
        "highFrequency": 6045,
        "lowFrequency": 6025
    },
    "maxPsd": 15.4
},
{
    "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
```

```
    },  
    "maxPsd": 19.5  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6085,  
      "lowFrequency": 6065  
    },  
    "maxPsd": 20.6  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6105,  
      "lowFrequency": 6085  
    },  
    "maxPsd": 15.0  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6125,  
      "lowFrequency": 6105  
    },  
    "maxPsd": 17.8  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6145,  
      "lowFrequency": 6125  
    },  
    "maxPsd": 21.3  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6165,  
      "lowFrequency": 6145  
    },  
    "maxPsd": 21.8
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6185,  
        "lowFrequency": 6165  
      },  
      "maxPsd": 14.7  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6205,  
        "lowFrequency": 6185  
      },  
      "maxPsd": 17.9  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6225,  
        "lowFrequency": 6205  
      },  
      "maxPsd": 21.9  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6245,  
        "lowFrequency": 6225  
      },  
      "maxPsd": 12.0  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6265,  
        "lowFrequency": 6245  
      },  
      "maxPsd": 11.0  
    },  
    {
```

```
        "frequencyRange": {
            "highFrequency": 6285,
            "lowFrequency": 6265
        },
        "maxPsd": 9.3
    },
    {
        "frequencyRange": {
            "highFrequency": 6305,
            "lowFrequency": 6285
        },
        "maxPsd": 17.7
    },
    {
        "frequencyRange": {
            "highFrequency": 6325,
            "lowFrequency": 6305
        },
        "maxPsd": 12.9
    },
    {
        "frequencyRange": {
            "highFrequency": 6345,
            "lowFrequency": 6325
        },
        "maxPsd": 14.2
    }
],
"requestId": "847016845",
"availabilityExpireTime": "2025-11-05T06:48:56Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

2025-11-04T06:55:36Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "594",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "253832320",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "latitude": 24.845001,
          "longitude": 121.019426
        },
        "majorAxis": 16,
        "minorAxis": 16,
        "orientation": 0
      },
      "elevation": {
        "height": 0.0,

```

```
        "heightType": "AMSL",
        "verticalUncertainty": 26
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
]
}
]
}
}
```

2025-11-04T06:55:36Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 12.5
        },
        {

```

```
"frequencyRange": {
  "highFrequency": 5985,
  "lowFrequency": 5965
},
"maxPsd": 10.3
},
{
  "frequencyRange": {
    "highFrequency": 6005,
    "lowFrequency": 5985
  },
  "maxPsd": 12.4
},
{
  "frequencyRange": {
    "highFrequency": 6025,
    "lowFrequency": 6005
  },
  "maxPsd": 17.5
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 15.4
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 19.5
},
{
  "frequencyRange": {
    "highFrequency": 6085,
```

```
        "lowFrequency": 6065
      },
      "maxPsd": 20.6
    },
    {
      "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
      },
      "maxPsd": 15.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
      },
      "maxPsd": 17.8
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
      "maxPsd": 21.3
    },
    {
      "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
      },
      "maxPsd": 21.8
    },
    {
      "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
      },
    },
```

```
"maxPsd": 14.7
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 17.9
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 21.9
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 12.0
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 11.0
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 9.3
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 17.7
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 12.9
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 14.2
}
],
"requestId": "253832320",
"availabilityExpireTime": "2025-11-05T06:55:36Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDSA31_Frequency_40MHz_10612_1

2025-11-04T07:09:06Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "593",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "98843471",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "latitude": 24.845001,
              "longitude": 121.019426
            },
            "majorAxis": 16,
            "minorAxis": 16,
            "orientation": 0
          }
        }
      }
    ]
  }
}
```

```
        "elevation": {
            "height": 0.0,
            "heightType": "AMSL",
            "verticalUncertainty": 26
        },
        "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
        {
            "lowFrequency": 5925,
            "highFrequency": 6425
        },
        {
            "lowFrequency": 6525,
            "highFrequency": 6875
        }
    ]
}
]
```

2025-11-04T07:09:07Z

```
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableFrequencyInfo": [
                {
                    "frequencyRange": {
                        "highFrequency": 6205,
                        "lowFrequency": 6185
                    },
                    "maxPsd": 19.5
                }
            ]
        }
    ]
}
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6225,  
        "lowFrequency": 6205  
      },  
      "maxPsd": 13.2  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6245,  
        "lowFrequency": 6225  
      },  
      "maxPsd": 10.1  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6265,  
        "lowFrequency": 6245  
      },  
      "maxPsd": 9.0  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6285,  
        "lowFrequency": 6265  
      },  
      "maxPsd": 19.2  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6305,  
        "lowFrequency": 6285  
      },  
      "maxPsd": 17.0  
    },  
    {
```

```
"frequencyRange": {
  "highFrequency": 6325,
  "lowFrequency": 6305
},
"maxPsd": 11.3
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 20.3
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 11.3
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 18.8
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 10.0
},
{
  "frequencyRange": {
    "highFrequency": 6425,
```

```
        "lowFrequency": 6405
      },
      "maxPsd": 21.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6685,
        "lowFrequency": 6665
      },
      "maxPsd": 8.1
    },
    {
      "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
      },
      "maxPsd": 9.6
    },
    {
      "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
      },
      "maxPsd": 17.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
      },
      "maxPsd": 12.3
    }
  ],
  "requestId": "98843471",
  "availabilityExpireTime": "2025-11-05T07:09:07Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
```

```
    ],
    "version": "1.4"
}

##### 2025-11-04T07:27:59Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "593",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "19238032",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "latitude": 24.845001,
          "longitude": 121.019426
        },
        "majorAxis": 16,
```

```
        "minorAxis": 16,
        "orientation": 0
    },
    "elevation": {
        "height": 0.0,
        "heightType": "AMSL",
        "verticalUncertainty": 26
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
]
}
]
}
}
```

2025-11-04T07:28:00Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
```

```
        "lowFrequency": 5945
      },
      "maxPsd": 12.8
    },
    {
      "frequencyRange": {
        "highFrequency": 5985,
        "lowFrequency": 5965
      },
      "maxPsd": 12.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
      },
      "maxPsd": 19.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
      },
      "maxPsd": 19.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6045,
        "lowFrequency": 6025
      },
      "maxPsd": 14.5
    },
    {
      "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
      },
```

```
"maxPsd": 13.0
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 8.1
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 12.3
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 9.2
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 8.6
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 15.3
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 16.4
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 9.4
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 10.0
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 21.5
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 21.6
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6765,
        "lowFrequency": 6745
      },
      "maxPsd": 17.4
    },
    {
      "frequencyRange": {
        "highFrequency": 6785,
        "lowFrequency": 6765
      },
      "maxPsd": 20.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6805,
        "lowFrequency": 6785
      },
      "maxPsd": 11.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6825,
        "lowFrequency": 6805
      },
      "maxPsd": 14.2
    }
  ],
  "requestId": "19238032",
  "availabilityExpireTime": "2025-11-05T07:28:00Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}

],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDSA31_Frequency_80MHz_10613_1

2025-11-04T09:15:54Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1712991714",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "latitude": 24.845001,
              "longitude": 121.019426
            },
            "majorAxis": 16,
            "minorAxis": 16,
            "orientation": 0
          }
        }
      }
    ]
  }
}
```

```
        "elevation": {
            "height": 0.0,
            "heightType": "AMSL",
            "verticalUncertainty": 26
        },
        "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
        {
            "lowFrequency": 5925,
            "highFrequency": 6425
        },
        {
            "lowFrequency": 6525,
            "highFrequency": 6875
        }
    ]
}
]
```

2025-11-04T09:15:54Z

```
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableFrequencyInfo": [
                {
                    "frequencyRange": {
                        "highFrequency": 6285,
                        "lowFrequency": 6265
                    },
                    "maxPsd": 21.5
                }
            ]
        }
    ]
}
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6305,  
        "lowFrequency": 6285  
      },  
      "maxPsd": 16.2  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6325,  
        "lowFrequency": 6305  
      },  
      "maxPsd": 10.1  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6345,  
        "lowFrequency": 6325  
      },  
      "maxPsd": 12.6  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6605,  
        "lowFrequency": 6585  
      },  
      "maxPsd": 16.4  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6625,  
        "lowFrequency": 6605  
      },  
      "maxPsd": 15.9  
    },  
    {
```

```
"frequencyRange": {
  "highFrequency": 6645,
  "lowFrequency": 6625
},
"maxPsd": 14.7
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 13.7
},
{
  "frequencyRange": {
    "highFrequency": 6685,
    "lowFrequency": 6665
  },
  "maxPsd": 19.4
},
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 18.6
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 15.5
},
{
  "frequencyRange": {
    "highFrequency": 6745,
```

```
        "lowFrequency": 6725
      },
      "maxPsd": 20.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
      },
      "maxPsd": 8.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6785,
        "lowFrequency": 6765
      },
      "maxPsd": 9.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6805,
        "lowFrequency": 6785
      },
      "maxPsd": 10.4
    },
    {
      "frequencyRange": {
        "highFrequency": 6825,
        "lowFrequency": 6805
      },
      "maxPsd": 9.7
    }
  ],
  "requestId": "1712991714",
  "availabilityExpireTime": "2025-11-05T09:15:54Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
```

```
  ],  
  "version": "1.4"  
}
```

```
##### 2025-11-04T09:37:37Z #####
```

```
{  
  "headers": {  
    "Host": "testserver.wfatestorg.org",  
    "Accept": "*/*",  
    "Content-Type": "application/json",  
    "X-Forwarded-For": "192.168.0.2",  
    "X-Forwarded-Host": "testserver.wfatestorg.org",  
    "X-Forwarded-Server": "testserver.wfatestorg.org",  
    "Content-Length": "593",  
    "Connection": "Keep-Alive"  
  },  
  "body": {  
    "version": "1.4",  
    "availableSpectrumInquiryRequests": [  
      {  
        "requestId": "39714927",  
        "deviceDescriptor": {  
          "serialNumber": "02-04-56-00-01-23",  
          "certificationId": [  
            {  
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",  
              "id": "Z8H89FT0082"  
            }  
          ]  
        }  
      ]  
    },  
    "location": {  
      "ellipse": {  
        "center": {  
          "latitude": 24.845001,  
          "longitude": 121.019426  
        },  
        "majorAxis": 16,  

```

```
        "minorAxis": 16,
        "orientation": 0
      },
      "elevation": {
        "height": 0.0,
        "heightType": "AMSL",
        "verticalUncertainty": 26
      },
      "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
      {
        "lowFrequency": 5925,
        "highFrequency": 6425
      },
      {
        "lowFrequency": 6525,
        "highFrequency": 6875
      }
    ]
  }
]
```

2025-11-04T09:37:38Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
```

```
        "lowFrequency": 5945
      },
      "maxPsd": 12.2
    },
    {
      "frequencyRange": {
        "highFrequency": 5985,
        "lowFrequency": 5965
      },
      "maxPsd": 8.4
    },
    {
      "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
      },
      "maxPsd": 18.3
    },
    {
      "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
      },
      "maxPsd": 13.6
    },
    {
      "frequencyRange": {
        "highFrequency": 6045,
        "lowFrequency": 6025
      },
      "maxPsd": 21.1
    },
    {
      "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
      },
    },
```

```
"maxPsd": 18.2
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 8.3
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 20.3
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 8.0
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 17.3
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 13.3
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 19.2
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 16.5
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 18.3
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 8.5
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 12.7
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
      "maxPsd": 11.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
      },
      "maxPsd": 21.9
    },
    {
      "frequencyRange": {
        "highFrequency": 6405,
        "lowFrequency": 6385
      },
      "maxPsd": 13.0
    },
    {
      "frequencyRange": {
        "highFrequency": 6425,
        "lowFrequency": 6405
      },
      "maxPsd": 14.9
    }
  ],
  "requestId": "39714927",
  "availabilityExpireTime": "2025-11-05T09:37:38Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}

],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1

2025-11-06T03:11:13Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1678564615",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "latitude": 24.845001,
              "longitude": 121.019426
            },
            "majorAxis": 16,
            "minorAxis": 16,
            "orientation": 0
          }
        }
      }
    ]
  }
}
```

```
        "elevation": {
            "height": 0.0,
            "heightType": "AMSL",
            "verticalUncertainty": 26
        },
        "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
        {
            "lowFrequency": 5925,
            "highFrequency": 6425
        },
        {
            "lowFrequency": 6525,
            "highFrequency": 6875
        }
    ]
}

]
}

}

##### 2025-11-06T03:11:13Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableFrequencyInfo": [],
            "requestId": "1678564615",
            "availabilityExpireTime": "2025-11-07T03:11:13Z",
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
        }
    ],
    "version": "1.4"
}
```

CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1

2025-11-06T06:28:44Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1698537788",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "latitude": 24.845001,
              "longitude": 121.019426
            },
            "majorAxis": 16,
            "minorAxis": 16,
            "orientation": 0
          }
        }
      }
    ]
  }
}
```

```
        "elevation": {
            "height": 0.0,
            "heightType": "AMSL",
            "verticalUncertainty": 26
        },
        "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
        {
            "lowFrequency": 5925,
            "highFrequency": 6425
        },
        {
            "lowFrequency": 6525,
            "highFrequency": 6875
        }
    ]
}
]
```

2025-11-06T06:28:44Z

```
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableFrequencyInfo": [
                {
                    "frequencyRange": {
                        "highFrequency": 5965,
                        "lowFrequency": 5945
                    },
                    "maxPsd": 18.1
                }
            ]
        }
    ]
}
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 5985,  
        "lowFrequency": 5965  
      },  
      "maxPsd": 15.3  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6005,  
        "lowFrequency": 5985  
      },  
      "maxPsd": 9.4  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6025,  
        "lowFrequency": 6005  
      },  
      "maxPsd": 13.1  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6205,  
        "lowFrequency": 6185  
      },  
      "maxPsd": 8.6  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6225,  
        "lowFrequency": 6205  
      },  
      "maxPsd": 17.6  
    },  
    {
```

```
"frequencyRange": {
  "highFrequency": 6245,
  "lowFrequency": 6225
},
"maxPsd": 13.6
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 10.3
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 19.7
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 15.0
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 20.7
},
{
  "frequencyRange": {
    "highFrequency": 6345,
```

```
        "lowFrequency": 6325
      },
      "maxPsd": 20.1
    },
    {
      "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
      },
      "maxPsd": 11.7
    },
    {
      "frequencyRange": {
        "highFrequency": 6785,
        "lowFrequency": 6765
      },
      "maxPsd": 9.8
    },
    {
      "frequencyRange": {
        "highFrequency": 6805,
        "lowFrequency": 6785
      },
      "maxPsd": 17.2
    },
    {
      "frequencyRange": {
        "highFrequency": 6825,
        "lowFrequency": 6805
      },
      "maxPsd": 15.5
    }
  ],
  "requestId": "1698537788",
  "availabilityExpireTime": "2025-11-07T06:28:44Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
```

```
    ],
    "version": "1.4"
}

##### 2025-11-06T06:39:50Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1213744224",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        }
      }
    ],
    "location": {
      "ellipse": {
        "center": {
          "latitude": 24.845001,
          "longitude": 121.019426
        },
        "majorAxis": 16,
```

```
        "minorAxis": 16,
        "orientation": 0
    },
    "elevation": {
        "height": 0.0,
        "heightType": "AMSL",
        "verticalUncertainty": 26
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
]
}
]
```

2025-11-06T06:41:31Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },

```

```
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1213744225",
      "deviceDescriptor": {
        "serialNumber": "02-04-56-00-01-23",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "Z8H89FT0082"
          }
        ]
      },
      "location": {
        "ellipse": {
          "center": {
            "latitude": 24.845001,
            "longitude": 121.019426
          },
          "majorAxis": 16,
          "minorAxis": 16,
          "orientation": 0
        },
        "elevation": {
          "height": 0.0,
          "heightType": "AMSL",
          "verticalUncertainty": 26
        },
        "indoorDeployment": 2
      },
      "inquiredFrequencyRange": [
        {
          "lowFrequency": 5925,
          "highFrequency": 6425
        }
      ]
    }
  ]
}
```

```
        "lowFrequency": 6525,
        "highFrequency": 6875
      }
    ]
  }
]
```

2025-11-06T06:42:18Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6045,
            "lowFrequency": 6025
          },
          "maxPsd": 12.7
        },
        {
          "frequencyRange": {
            "highFrequency": 6065,
            "lowFrequency": 6045
          },
          "maxPsd": 18.6
        },
        {
          "frequencyRange": {
            "highFrequency": 6085,
            "lowFrequency": 6065
          },

```

```
"maxPsd": 9.2
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 16.3
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 9.8
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 15.0
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 15.9
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 20.0
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 12.8
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 19.8
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 11.1
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 11.8
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 16.1
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 12.8
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
    },
    "maxPsd": 17.3
},
{
    "frequencyRange": {
        "highFrequency": 6665,
        "lowFrequency": 6645
    },
    "maxPsd": 18.6
},
{
    "frequencyRange": {
        "highFrequency": 6685,
        "lowFrequency": 6665
    },
    "maxPsd": 9.6
},
{
    "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
    },
    "maxPsd": 21.5
},
{
    "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
```

```
        },
        "maxPsd": 14.7
      },
      {
        "frequencyRange": {
          "highFrequency": 6745,
          "lowFrequency": 6725
        },
        "maxPsd": 17.6
      }
    ],
    "requestId": "1213744224",
    "availabilityExpireTime": "2025-11-07T06:42:18Z",
    "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
  }
],
"version": "1.4"
}
```

2025-11-06T06:42:18Z

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6045,
            "lowFrequency": 6025
          },
          "maxPsd": 12.7
        },
        {
          "frequencyRange": {
```

```
        "highFrequency": 6065,
        "lowFrequency": 6045
    },
    "maxPsd": 18.6
},
{
    "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
    },
    "maxPsd": 9.2
},
{
    "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
    },
    "maxPsd": 16.3
},
{
    "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
    },
    "maxPsd": 9.8
},
{
    "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
    },
    "maxPsd": 15.0
},
{
    "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
```

```
    },
    "maxPsd": 15.9
  },
  {
    "frequencyRange": {
      "highFrequency": 6185,
      "lowFrequency": 6165
    },
    "maxPsd": 20.0
  },
  {
    "frequencyRange": {
      "highFrequency": 6365,
      "lowFrequency": 6345
    },
    "maxPsd": 12.8
  },
  {
    "frequencyRange": {
      "highFrequency": 6385,
      "lowFrequency": 6365
    },
    "maxPsd": 19.8
  },
  {
    "frequencyRange": {
      "highFrequency": 6405,
      "lowFrequency": 6385
    },
    "maxPsd": 11.1
  },
  {
    "frequencyRange": {
      "highFrequency": 6425,
      "lowFrequency": 6405
    },
    "maxPsd": 11.8
  }
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6605,  
        "lowFrequency": 6585  
      },  
      "maxPsd": 16.1  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6625,  
        "lowFrequency": 6605  
      },  
      "maxPsd": 12.8  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6645,  
        "lowFrequency": 6625  
      },  
      "maxPsd": 17.3  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6665,  
        "lowFrequency": 6645  
      },  
      "maxPsd": 18.6  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6685,  
        "lowFrequency": 6665  
      },  
      "maxPsd": 9.6  
    },  
    {
```

```
        "frequencyRange": {
            "highFrequency": 6705,
            "lowFrequency": 6685
        },
        "maxPsd": 21.5
    },
    {
        "frequencyRange": {
            "highFrequency": 6725,
            "lowFrequency": 6705
        },
        "maxPsd": 14.7
    },
    {
        "frequencyRange": {
            "highFrequency": 6745,
            "lowFrequency": 6725
        },
        "maxPsd": 17.6
    }
],
"requestId": "1213744225",
"availabilityExpireTime": "2025-11-07T06:42:18Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

CT_AFC_SP_AP_AFCDAU34_Frequency_10617_1

2025-11-06T07:00:33Z

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.2",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "595",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1580735515",
        "deviceDescriptor": {
          "serialNumber": "02-04-56-00-01-23",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "Z8H89FT0082"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "latitude": 24.845001,
              "longitude": 121.019426
            },
            "majorAxis": 16,
            "minorAxis": 16,
            "orientation": 0
          }
        }
      }
    ]
  }
}
```

```
        "elevation": {
            "height": 0.0,
            "heightType": "AMSL",
            "verticalUncertainty": 26
        },
        "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
        {
            "lowFrequency": 5925,
            "highFrequency": 6425
        },
        {
            "lowFrequency": 6525,
            "highFrequency": 6875
        }
    ]
}
]
```

2025-11-06T07:00:33Z

```
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
            "availableFrequencyInfo": [
                {
                    "frequencyRange": {
                        "highFrequency": 5945,
                        "lowFrequency": 5925
                    },
                    "maxPsd": 23
                }
            ]
        }
    ]
}
```

```
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 5965,  
        "lowFrequency": 5945  
      },  
      "maxPsd": 23  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 5985,  
        "lowFrequency": 5965  
      },  
      "maxPsd": 23  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6005,  
        "lowFrequency": 5985  
      },  
      "maxPsd": 23  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6025,  
        "lowFrequency": 6005  
      },  
      "maxPsd": 23  
    },  
    {  
      "frequencyRange": {  
        "highFrequency": 6045,  
        "lowFrequency": 6025  
      },  
      "maxPsd": 23  
    },  
    {
```

```
"frequencyRange": {
  "highFrequency": 6065,
  "lowFrequency": 6045
},
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6165,
```

```
        "lowFrequency": 6145
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6205,
        "lowFrequency": 6185
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6245,
        "lowFrequency": 6225
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6265,
        "lowFrequency": 6245
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6285,
        "lowFrequency": 6265
      },

```

```
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 23
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6545,
    "lowFrequency": 6525
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6565,
    "lowFrequency": 6545
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6585,
    "lowFrequency": 6565
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6605,
        "lowFrequency": 6585
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6665,
        "lowFrequency": 6645
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6685,
        "lowFrequency": 6665
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
```

```
    },  
    "maxPsd": 23  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6725,  
      "lowFrequency": 6705  
    },  
    "maxPsd": 23  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6745,  
      "lowFrequency": 6725  
    },  
    "maxPsd": 23  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6765,  
      "lowFrequency": 6745  
    },  
    "maxPsd": 23  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6785,  
      "lowFrequency": 6765  
    },  
    "maxPsd": 23  
  },  
  {  
    "frequencyRange": {  
      "highFrequency": 6805,  
      "lowFrequency": 6785  
    },  
    "maxPsd": 23  
  }
```

```
    },
    {
      "frequencyRange": {
        "highFrequency": 6825,
        "lowFrequency": 6805
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6845,
        "lowFrequency": 6825
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6865,
        "lowFrequency": 6845
      },
      "maxPsd": 23
    }
  ],
  "requestId": "1580735515",
  "availabilityExpireTime": "2025-11-07T07:00:33Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}

],
"version": "1.4"
}
```

```
##### 2025-11-06T07:09:18Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
```

```
"X-Forwarded-For": "192.168.0.2",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "595",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "2106110038",
      "deviceDescriptor": {
        "serialNumber": "02-04-56-00-01-23",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "Z8H89FT0082"
          }
        ]
      }
    }
  ],
  "location": {
    "ellipse": {
      "center": {
        "latitude": 24.845001,
        "longitude": 121.019426
      },
      "majorAxis": 16,
      "minorAxis": 16,
      "orientation": 0
    },
    "elevation": {
      "height": 0.0,
      "heightType": "AMSL",
      "verticalUncertainty": 26
    },
    "indoorDeployment": 2
  }
},
```

```
"inquiredFrequencyRange": [  
  {  
    "lowFrequency": 5925,  
    "highFrequency": 6425  
  },  
  {  
    "lowFrequency": 6525,  
    "highFrequency": 6875  
  }  
]  
}  
]  
}  
}  
  
##### 2025-11-06T07:09:18Z #####  
{  
  "availableSpectrumInquiryResponses": [  
    {  
      "response": {  
        "responseCode": 0,  
        "shortDescription": "SUCCESS"  
      },  
      "availableFrequencyInfo": [],  
      "requestId": "2106110038",  
      "availabilityExpireTime": "2025-11-07T07:09:18Z",  
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
    }  
  ],  
  "version": "1.4"  
}
```

AFC capability - Inquired Frequency
AFCD.RSA: Successful registration and spectrum access request

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (V1) (dBm)	Power (H1) (dBm)	Power (V2) (dBm)	Power (H2) (dBm)	EIRP (dBm)	PSD (V1) (dBm/MHz)	PSD (H1) (dBm/MHz)	PSD (V2) (dBm/MHz)	PSD (H2) (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6755	SP	20	21.898	-7.28	-8.20	-	-	17.188	-20.21	-21.12	-	-	4.028	8.10	Pass
5975	SP	20	21.898	-4.83	-5.87	-	-	19.588	-17.57	-18.55	-	-	6.718	10.30	Pass
6245	SP	40	21.898	-2.55	-3.65	-	-	21.848	-18.13	-18.91	-	-	6.338	9.00	Pass
6645	SP	40	21.898	8.56	7.71	-	-	33.068	-7.93	-8.02	-	-	16.858	21.50	Pass
6765 (6765+6805)	SP	40+40	21.898	-2.35	-3.61	-	-	27.503	-17.81	-19.47	-	-	6.198	8.70	Pass
6805 (6765+6805)	SP	40+40	21.898	-	-	1.33	1.00	-	-	-	-17.39	-17.28	7.498	9.70	Pass
6205 (6205+6245)	SP	40+40	21.898	4.80	3.24	-	-	29.610	-10.52	-12.26	-	-	13.478	16.50	Pass
6245 (6205+6245)	SP	40+40	21.898	-	-	-4.19	-4.04	-	-	-	-19.58	-19.34	5.368	8.50	Pass

AFCD.SAU: Successful spectrum access update

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (V1) (dBm)	Power (H1) (dBm)	Power (V2) (dBm)	Power (H2) (dBm)	EIRP (dBm)	PSD (V1) (dBm/MHz)	PSD (H1) (dBm/MHz)	PSD (V2) (dBm/MHz)	PSD (H2) (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
5975	SP	20	21.898	-0.35	-0.27	-	-	24.60	-12.99	-12.90	-	-	11.898	15.30	Pass
6375	SP	20	21.898	3.95	4.24	-	-	29.01	-9.24	-8.95	-	-	15.718	19.80	Pass

AFCD.UAU: Unsuccessful spectrum access update

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (V1) (dBm)	Power (H1) (dBm)	Power (V2) (dBm)	Power (H2) (dBm)	EIRP (dBm)	PSD (V1) (dBm/MHz)	PSD (H1) (dBm/MHz)	PSD (V2) (dBm/MHz)	PSD (H2) (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6135	SP	20	21.898	8.73	8.81	-	-	33.68	-4.25	-4.17	-	-	20.468	23.00	Pass

AFC capability - Inquired Frequency

CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1


Frequency (MHz): 6755

6.525-6.875GHz_2TX

AV Power

6755MHz_TX

04/11/2025

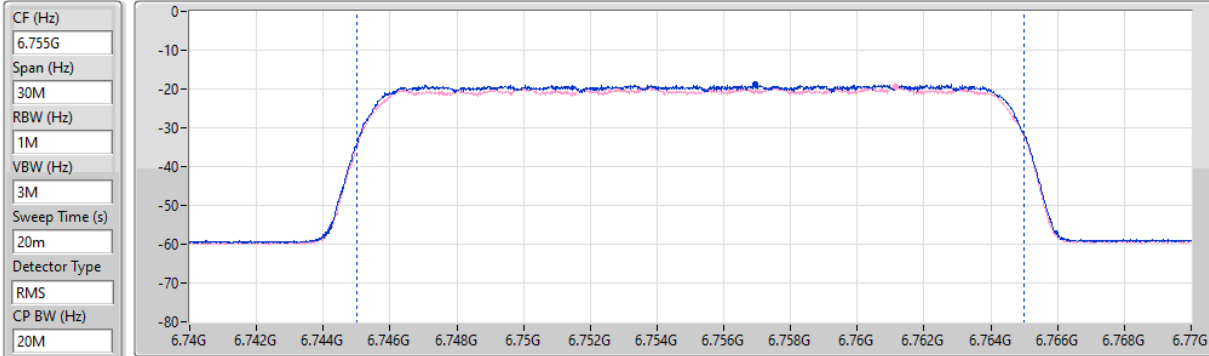

Sum= Total Power
PX=Port X


Sum(dBm)	P1(dBm)	P2(dBm)
-4.71	-7.28	-8.20

6.525-6.875GHz_2TX

PSD

6755MHz

04/11/2025

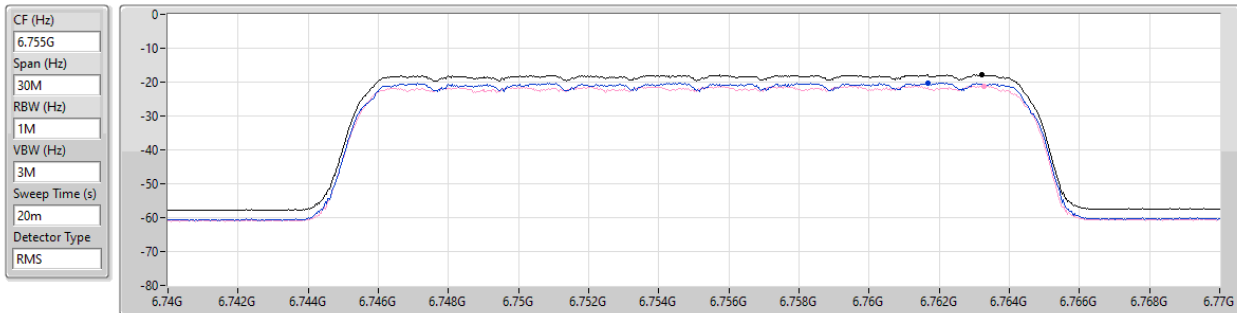

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.87	-17.87	-20.21	-21.12

Frequency (MHz): 5975

5.925-6.425GHz_2TX

AV Power

5975MHz_TX

04/11/2025

CF (Hz)
5.975G

Span (Hz)
30M


RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

CP BW (Hz)
20M

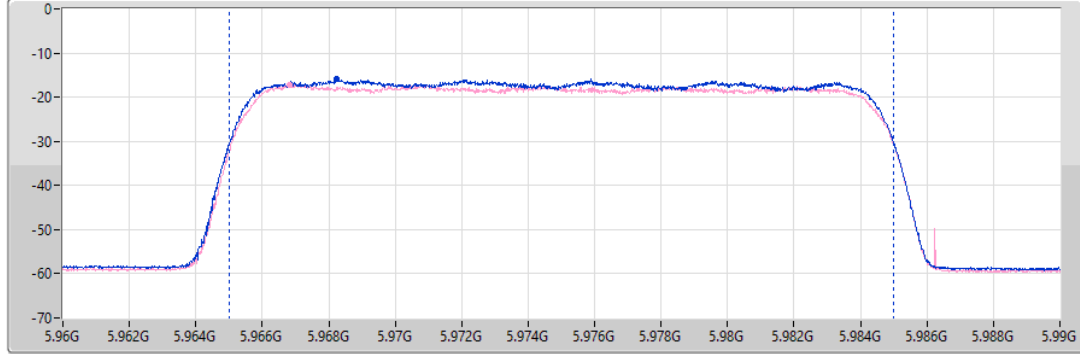

Port 1 

Port 2 

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
-2.31	-4.83	-5.87

5.925-6.425GHz_2TX

PSD

5975MHz

04/11/2025

CF (Hz)
5.975G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

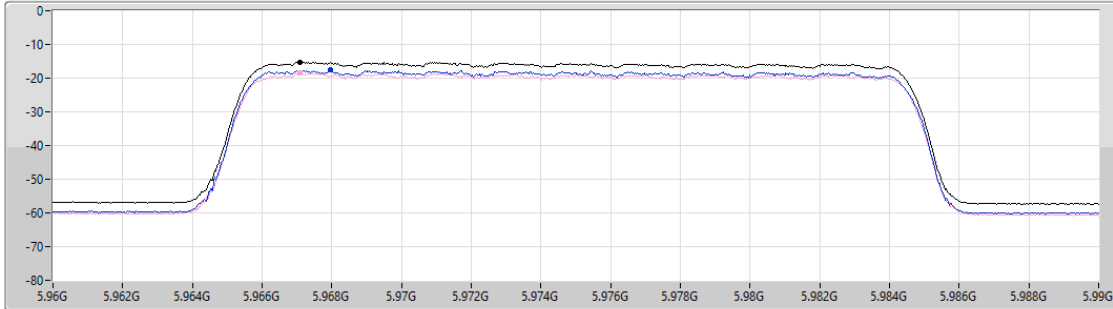

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-15.18	-15.18	-17.57	-18.55

CT_AFC_SP_AP_AFCRSA31_Frequency_40MHz_10612_1

Frequency (MHz): 6245

5.925-6.425GHz_2TX


AV Power

6245MHz_TX

04/11/2025

CF (Hz)
6.245G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS
CP BW (Hz)
40M

Sum=Total Power
PX=Port X

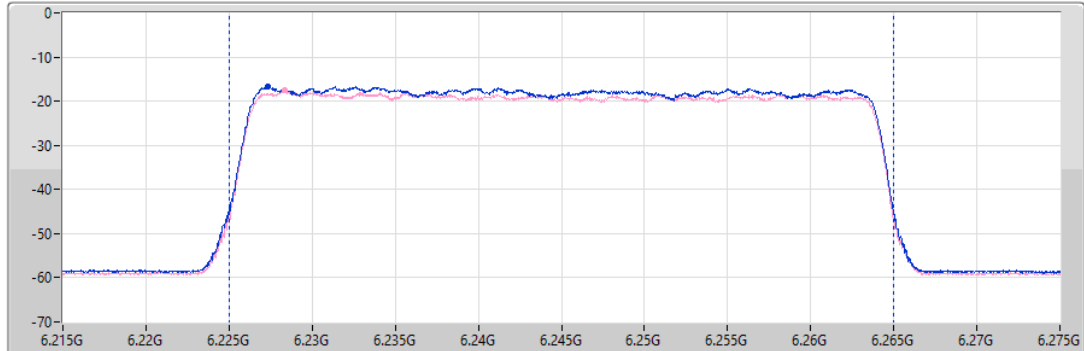

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
-0.05	-2.55	-3.65


5.925-6.425GHz_2TX

PSD

6245MHz

04/11/2025

CF (Hz)
6.245G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

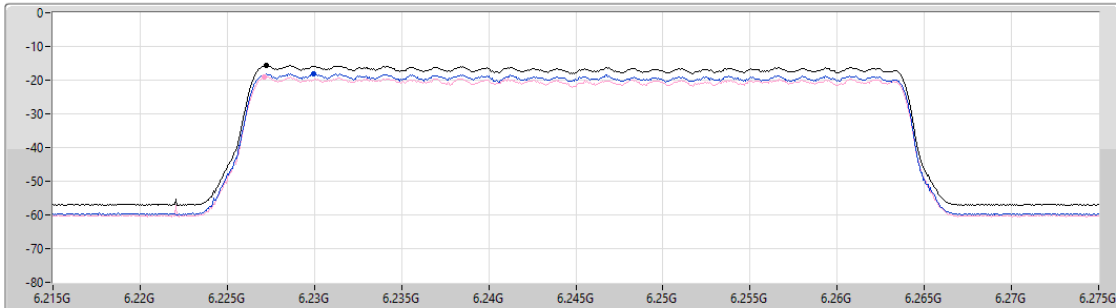

Sum
Port 1
Port 2

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
-15.56	-15.56	-18.13	-18.91

Frequency (MHz): 6645

6.525-6.875GHz_2TX

AV Power

6645MHz_TX

04/11/2025

CF (Hz)
6.645G

Span (Hz)
60M


RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

CP BW (Hz)
40M

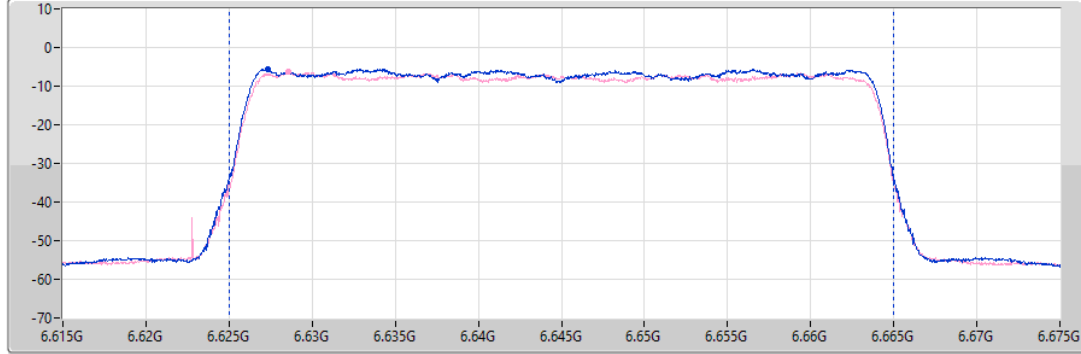

Port 1 

Port 2 

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
11.17	8.56	7.71

6.525-6.875GHz_2TX

PSD

6645MHz

04/11/2025

CF (Hz)
6.645G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

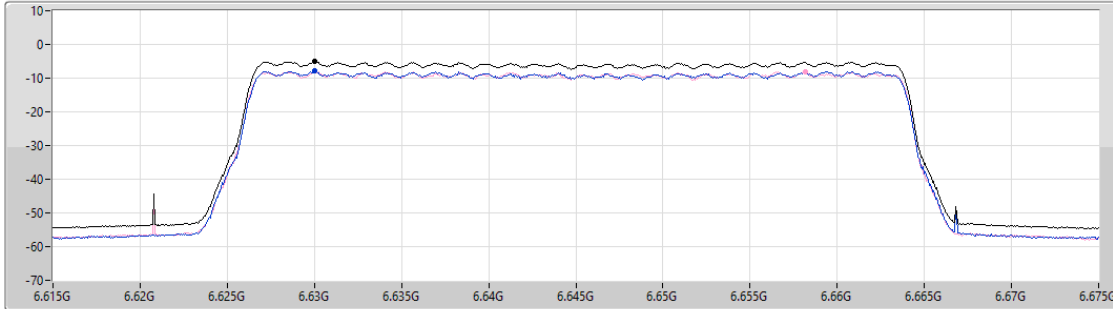

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.04	-5.04	-7.93	-8.02

CT_AFC_SP_AP_AFCDRSA31_Frequency_40+40MHz_10612_1

Frequency (MHz): 6765(6765+6805)

6.525-6.875GHz_2TX


AV Power

6765MHz_TX

04/11/2025

CF (Hz)
6.765G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS
CP BW (Hz)
40M

Sum=Total Power
PX=Port X

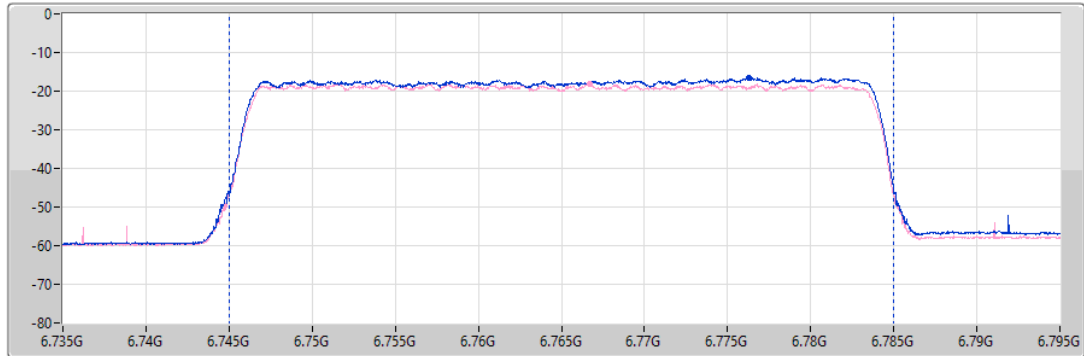

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
0.08	-2.35	-3.61


6.525-6.875GHz_2TX

PSD

6765MHz

04/11/2025

CF (Hz)
6.765G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

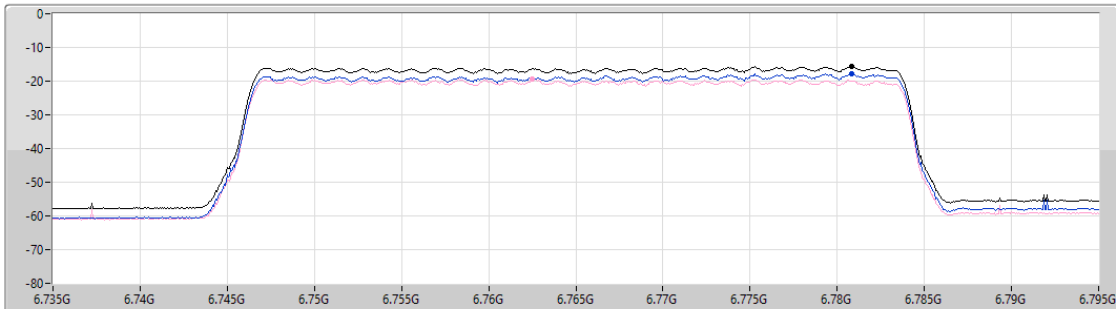

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.70	-15.70	-17.81	-19.47

Frequency (MHz): 6805(6765+6805)


6.525-6.875GHz_2TX

AV Power

6805MHz_TX

04/11/2025

CF (Hz)
6.805G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS
CP BW (Hz)
40M

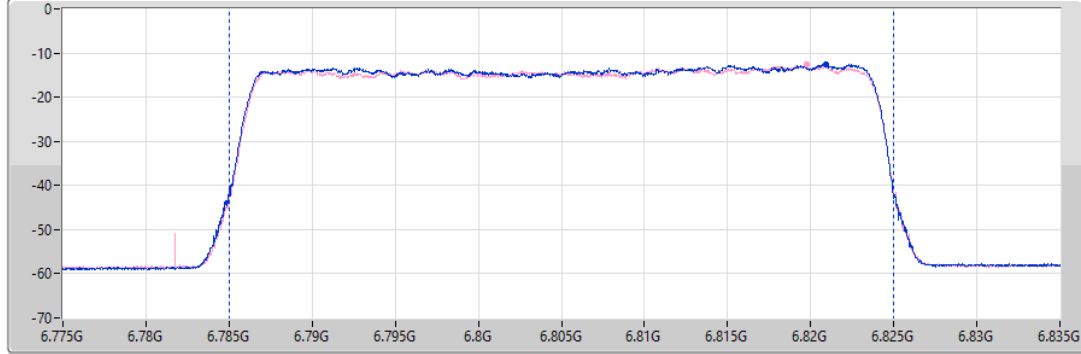

Port 1
Port 2

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
4.18	1.33	1.00


6.525-6.875GHz_2TX

PSD

6805MHz

04/11/2025

CF (Hz)
6.805G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

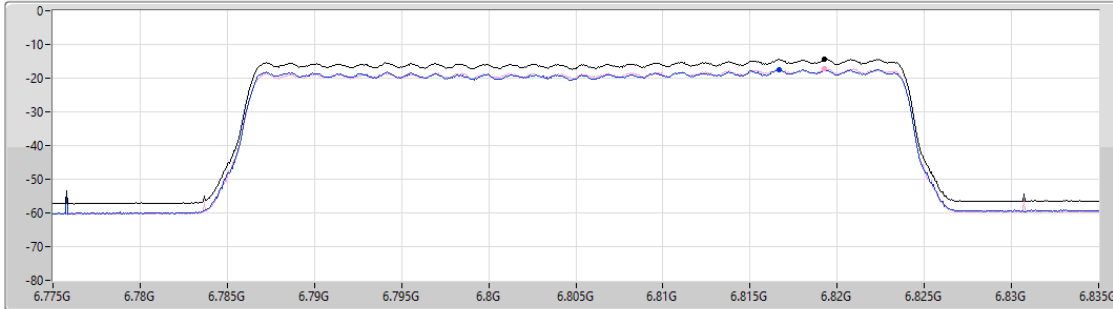

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.40	-14.40	-17.39	-17.28


Frequency (MHz): 6205(6205+6245)

5.925-6.425GHz_2TX

AV Power

6205MHz_TX

04/11/2025

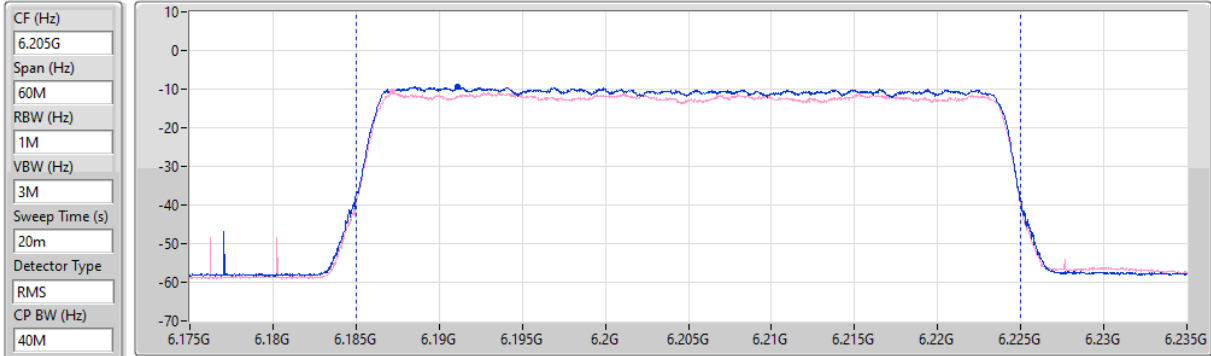


5.925-6.425GHz_2TX

PSD

6205MHz

04/11/2025

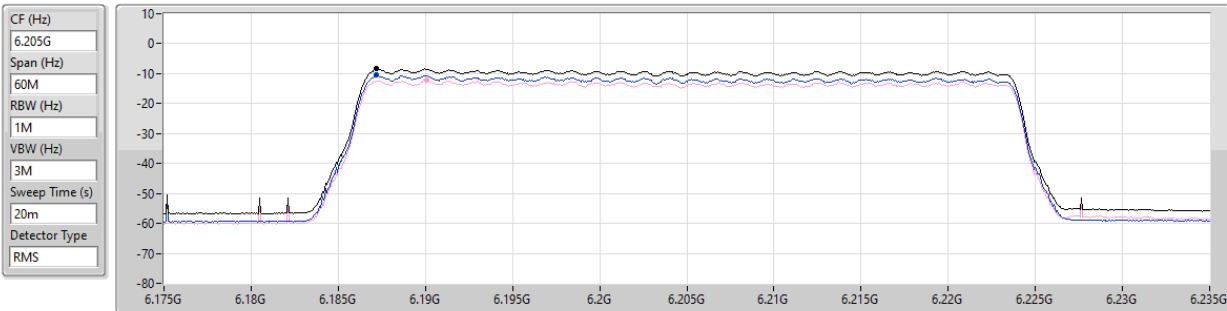

Frequency (MHz): 6245(6205+6245)

5.925-6.425GHz_2TX


AV Power

6245MHz_TX

04/11/2025

CF (Hz)
6.245G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS
CP BW (Hz)
40M

Sum=Total Power
PX=Port X

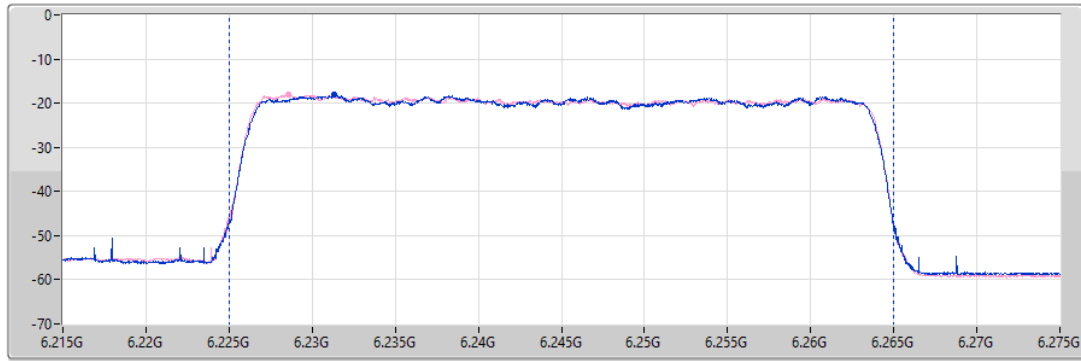

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
-1.10	-4.19	-4.04


5.925-6.425GHz_2TX

PSD

6245MHz

04/11/2025

CF (Hz)
6.245G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

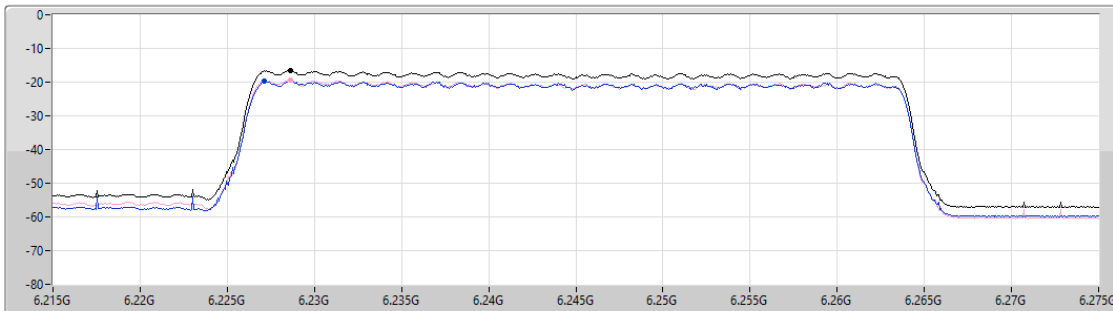

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.53	-16.53	-19.58	-19.34

CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1

Bandwidth: 20MHz

Frequency (MHz): 5975

5.925-6.425GHz_2TX

AV Power

5975MHz_TX

06/11/2025

CF (Hz)
5.975G

Span (Hz)
30M


RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

CP BW (Hz)
20M

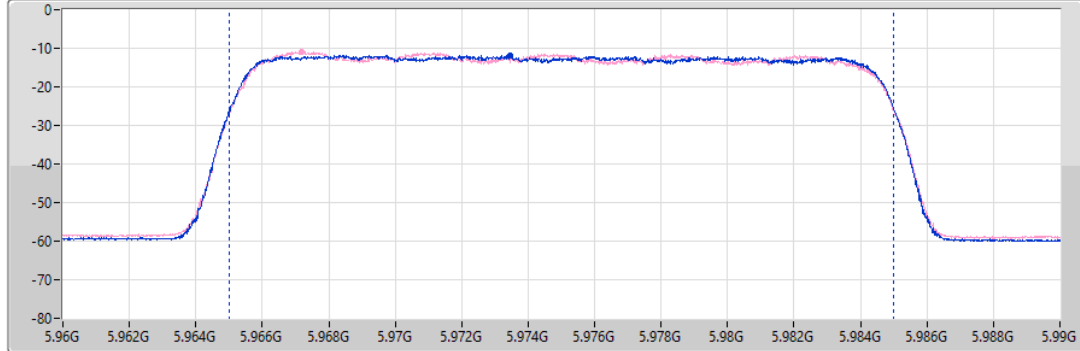

Port 1 

Port 2 

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
2.70	-0.35	-0.27

5.925-6.425GHz_2TX

PSD

5975MHz

06/11/2025

CF (Hz)
5.975G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

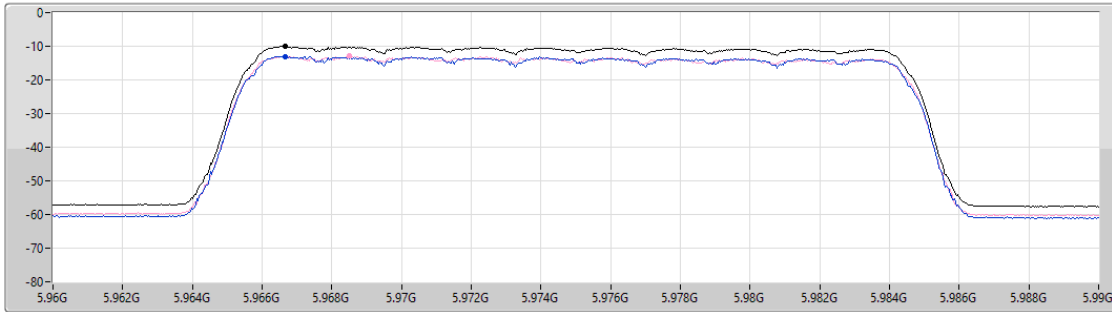

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.00	-10.00	-12.99	-12.90

Frequency (MHz): 6375

5.925-6.425GHz_2TX


AV Power

6375MHz_TX

06/11/2025

CF (Hz)
6.375G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS
CP BW (Hz)
20M

Sum=Total Power
PX=Port X

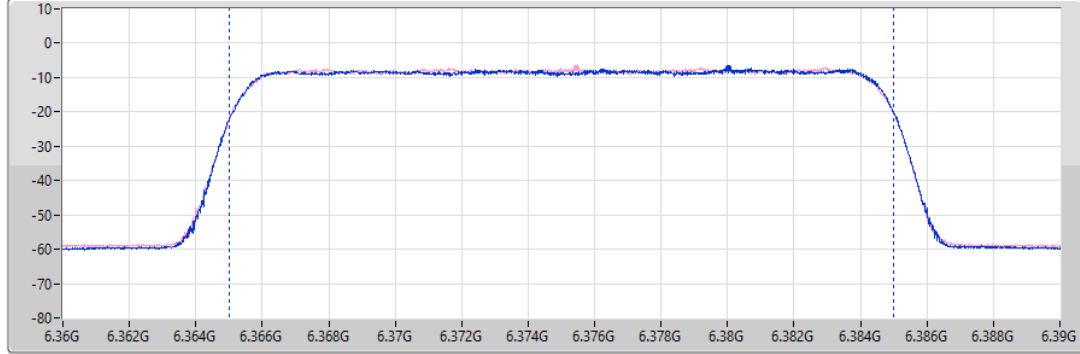

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
7.11	3.95	4.24


5.925-6.425GHz_2TX

PSD

6375MHz

06/11/2025

CF (Hz)
6.375G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

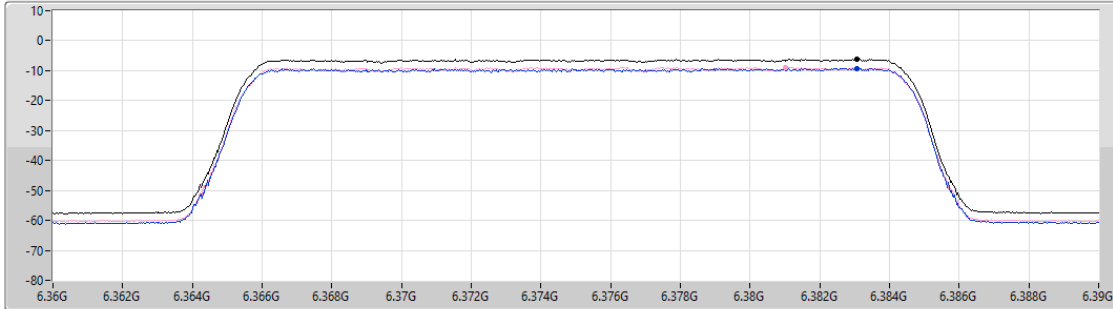

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.18	-6.18	-9.24	-8.95

CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1

Bandwidth: 20MHz

Frequency (MHz): 6135

5.925-6.425GHz_2TX

AV Power

6135MHz_TX

06/11/2025

CF (Hz)
6.135G

Span (Hz)
30M


RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

CP BW (Hz)
20M

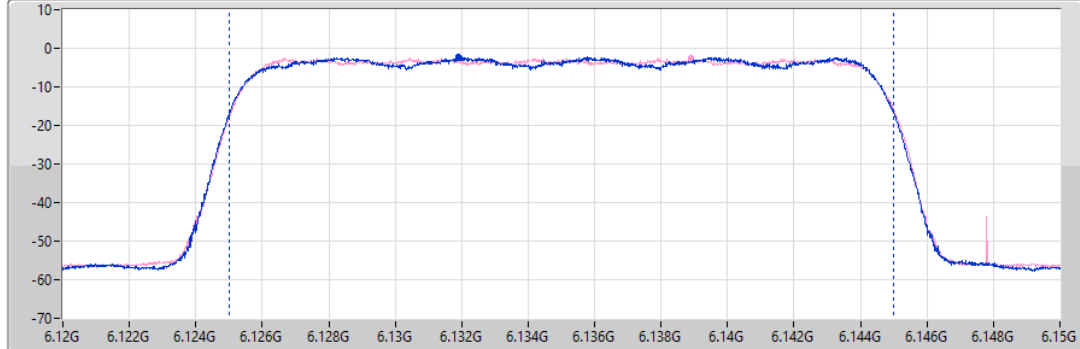

Port 1 

Port 2 

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
11.78	8.73	8.81

5.925-6.425GHz_2TX

PSD

6135MHz

06/11/2025

CF (Hz)
6.135G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

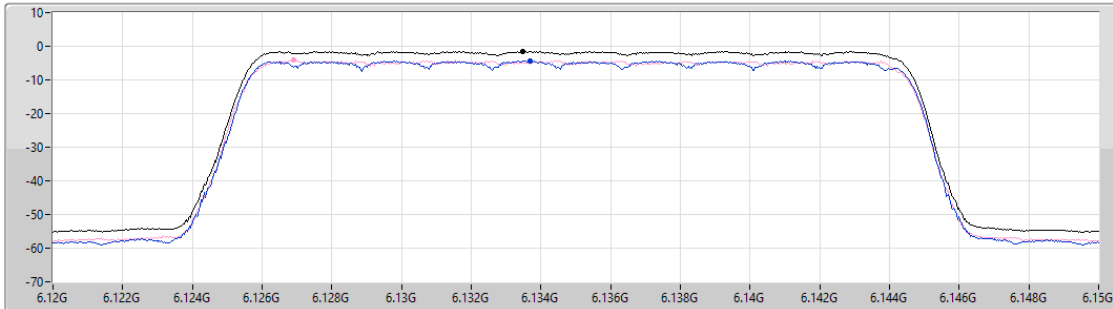

Sum 

Port 1 


Port 2 

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
-1.43	-1.43	-4.25	-4.17

Duty Cycle


Bandwidth: 20MHz

DC;ax20;BWch:20

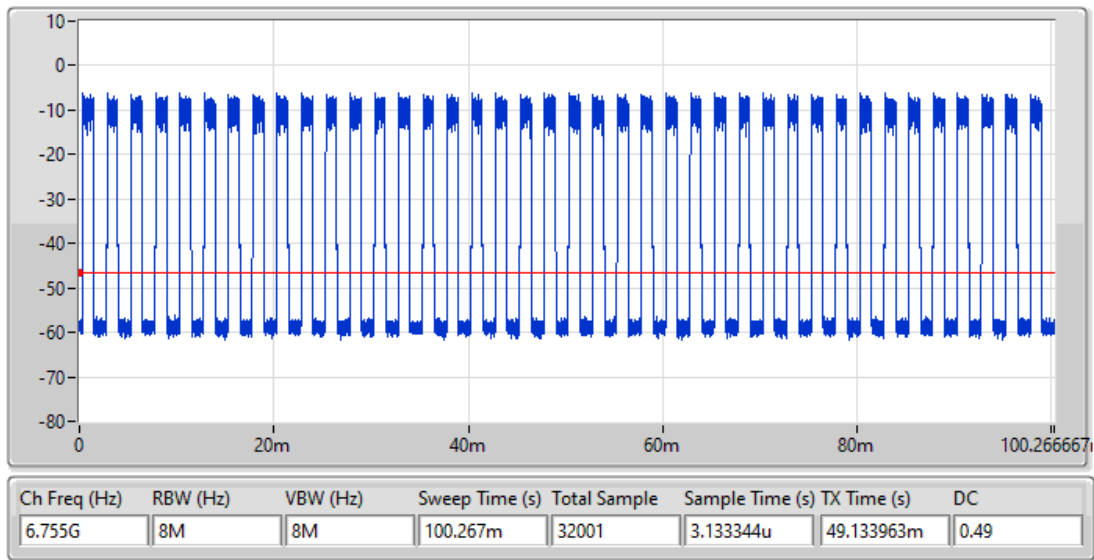

Bandwidth: 40MHz

DC;ax40;BWch:40

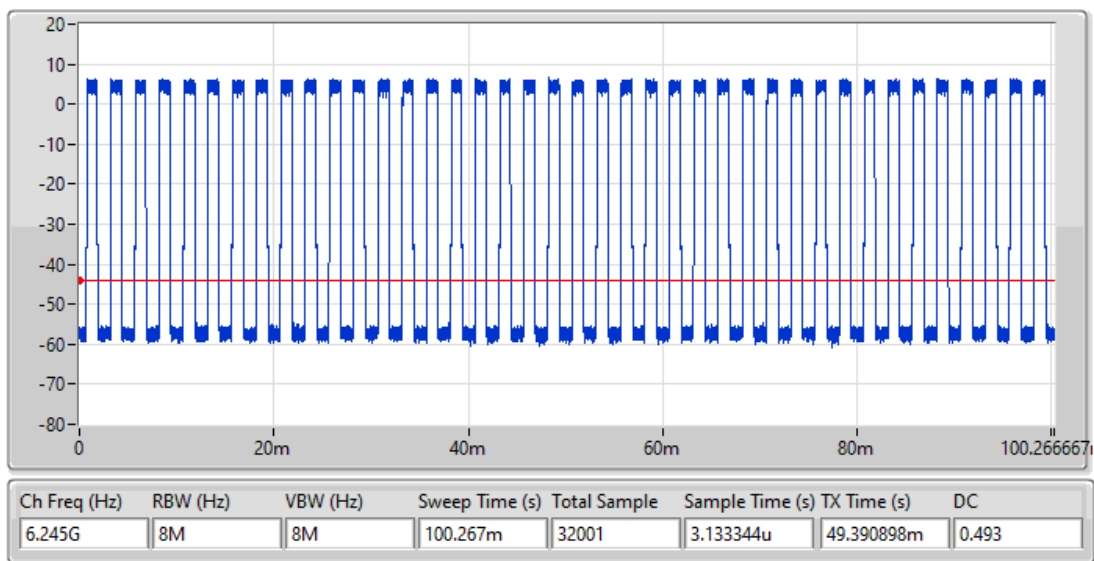

—THE END—