


Emission Bandwidth

Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	21.760	5169.040	5190.800	---	PASS
		5200	22.200	5188.320	5210.520	---	PASS
		5240	21.520	5229.200	5250.720	---	PASS
		5260	22.800	5247.960	5270.760	---	PASS
		5280	20.680	5269.840	5290.520	---	PASS
		5320	21.920	5308.760	5330.680	---	PASS
		5500	21.360	5488.840	5510.200	---	PASS
		5580	21.600	5569.440	5591.040	---	PASS
		5700	23.920	5688.160	5712.080	---	PASS
11N20SISO	Ant1	5180	23.200	5168.360	5191.560	---	PASS
		5200	22.080	5188.960	5211.040	---	PASS
		5240	21.240	5229.120	5250.360	---	PASS
		5260	22.840	5248.360	5271.200	---	PASS
		5280	21.920	5269.360	5291.280	---	PASS
		5320	21.760	5309.560	5331.320	---	PASS
		5500	22.120	5489.280	5511.400	---	PASS
		5580	22.080	5569.160	5591.240	---	PASS
		5700	23.240	5688.440	5711.680	---	PASS
11N40SISO	Ant1	5190	46.560	5166.800	5213.360	---	PASS
		5230	44.640	5207.680	5252.320	---	PASS
		5270	48.000	5246.000	5294.000	---	PASS
		5310	45.040	5287.520	5332.560	---	PASS
		5510	47.200	5486.720	5533.920	---	PASS
		5550	45.760	5526.640	5572.400	---	PASS
		5670	45.840	5647.440	5693.280	---	PASS
11AC20SISO	Ant1	5180	22.440	5168.840	5191.280	---	PASS
		5200	21.760	5189.440	5211.200	---	PASS
		5240	21.000	5229.480	5250.480	---	PASS
		5260	22.800	5248.400	5271.200	---	PASS
		5280	21.600	5269.280	5290.880	---	PASS
		5320	20.880	5309.480	5330.360	---	PASS
		5500	22.640	5488.960	5511.600	---	PASS
		5580	21.360	5569.560	5590.920	---	PASS
		5700	21.480	5689.280	5710.760	---	PASS
11AC40SISO	Ant1	5190	51.280	5162.800	5214.080	---	PASS
		5230	45.920	5206.800	5252.720	---	PASS

		5270	51.680	5241.440	5293.120	---	PASS
		5310	45.920	5287.600	5333.520	---	PASS
		5510	49.680	5484.160	5533.840	---	PASS
		5550	46.240	5527.200	5573.440	---	PASS
		5670	47.520	5646.400	5693.920	---	PASS
11AC80SISO	Ant1	5210	123.200	5141.840	5265.040	---	PASS
		5290	123.520	5233.520	5357.040	---	PASS
		5530	112.640	5477.680	5590.320	---	PASS
		5610	112.000	5555.600	5667.600	---	PASS

Test Graphs

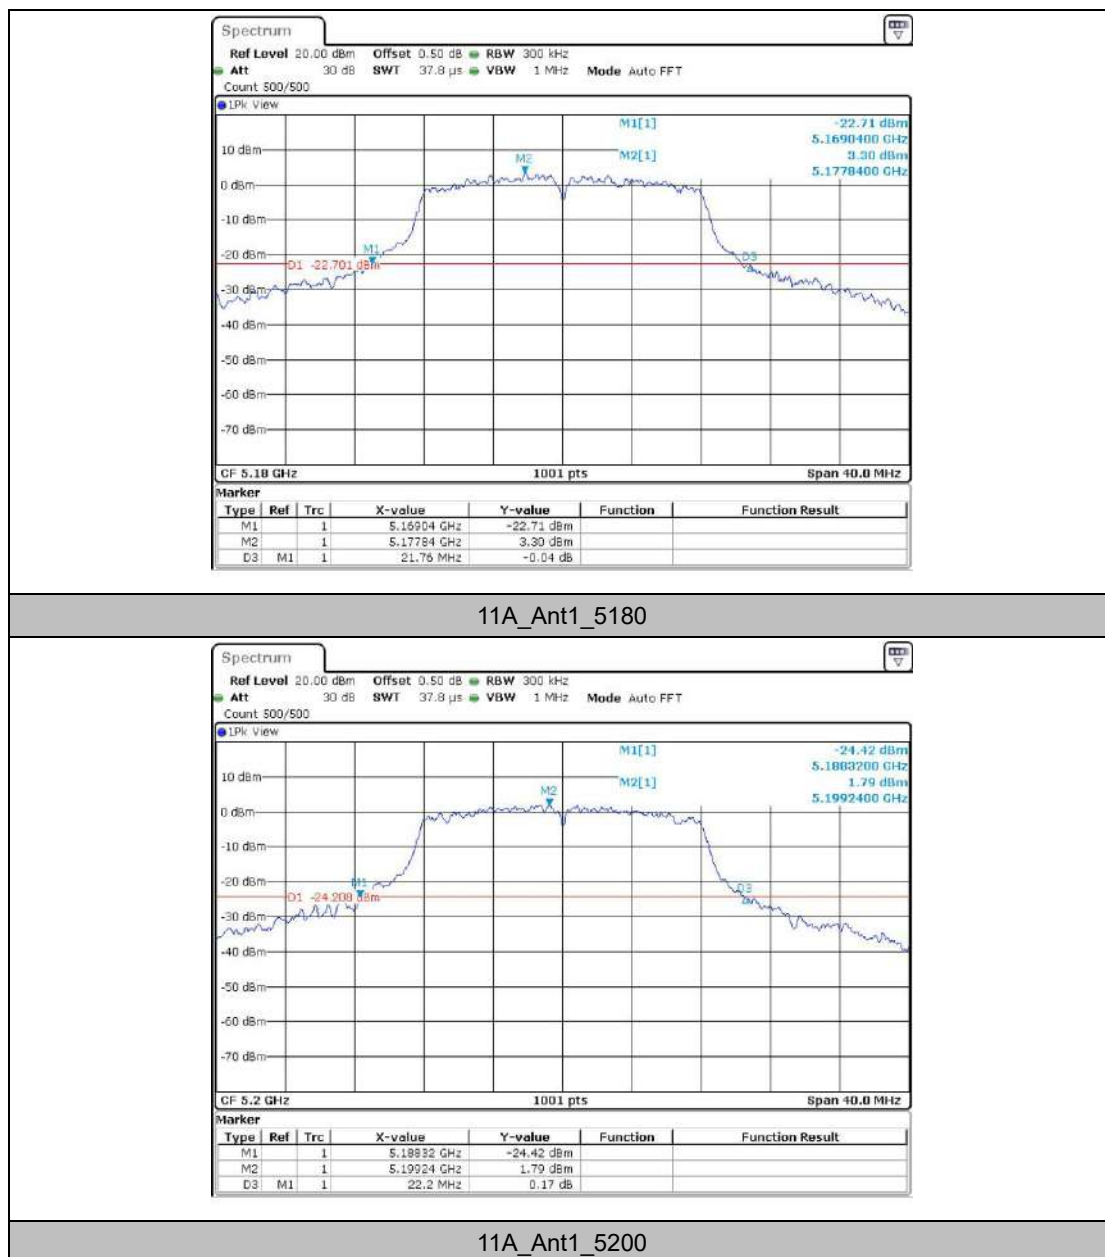




11A_Ant1_5240



11A_Ant1_5260

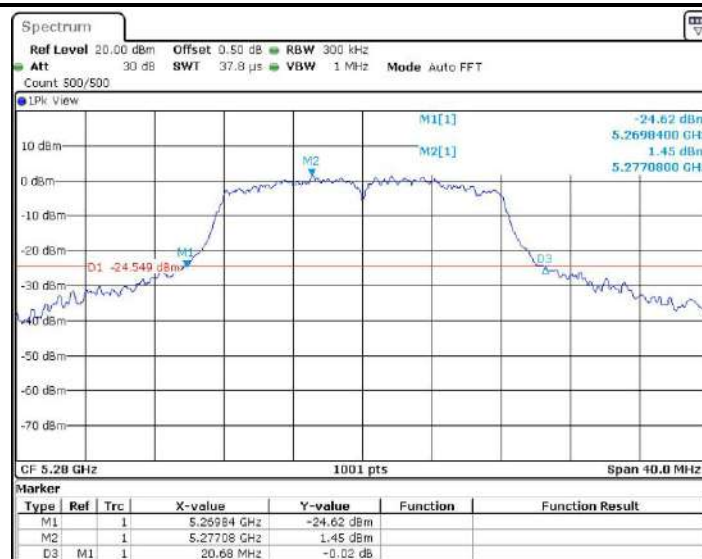

11A_Ant1_5280




11A_Ant1_5320




11A_Ant1_5500




11A_Ant1_5580

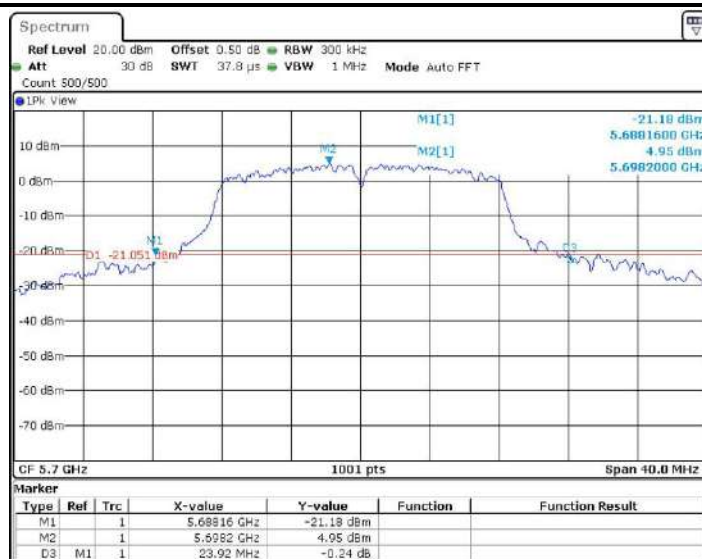

11A_Ant1_5700

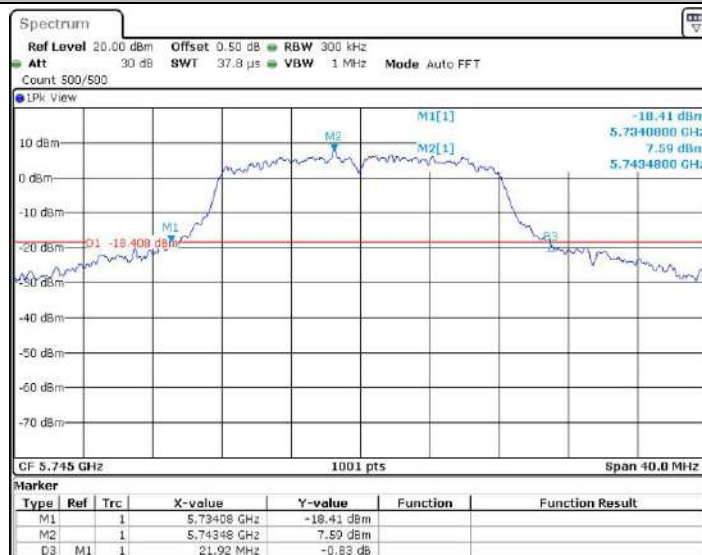

11A_Ant1_5745

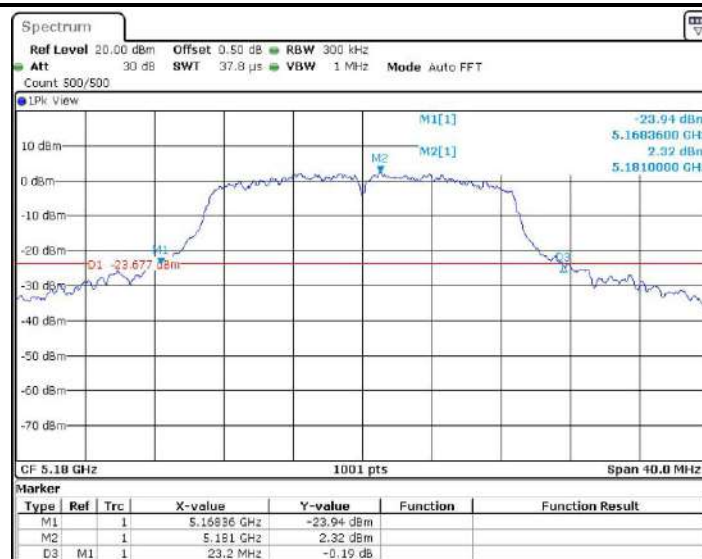


11N20SISO_Ant1_5180



11N20SISO_Ant1_5200



11N20SISO_Ant1_5240

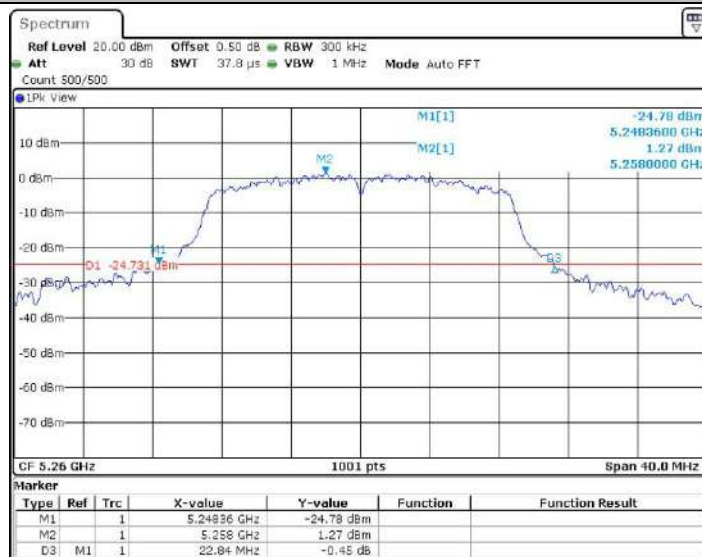

11N20SISO_Ant1_5260



11N20SISO_Ant1_5280




11N20SISO_Ant1_5320




11N20SISO_Ant1_5500




11N20SISO_Ant1_5580

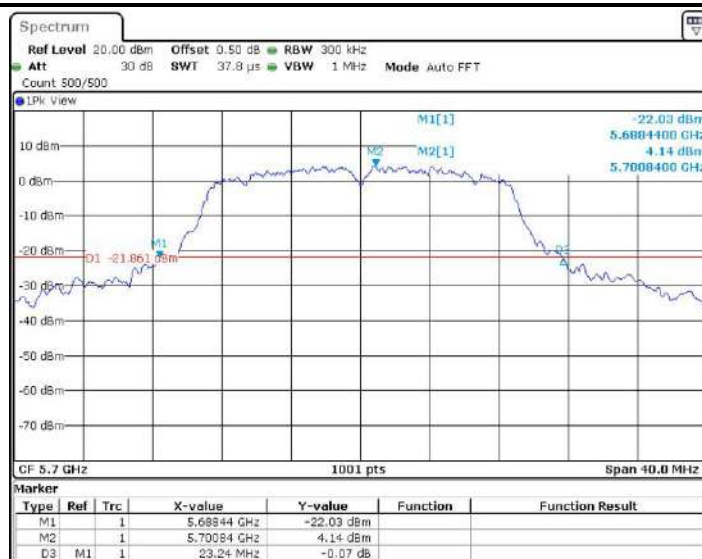


11N20SISO_Ant1_5700

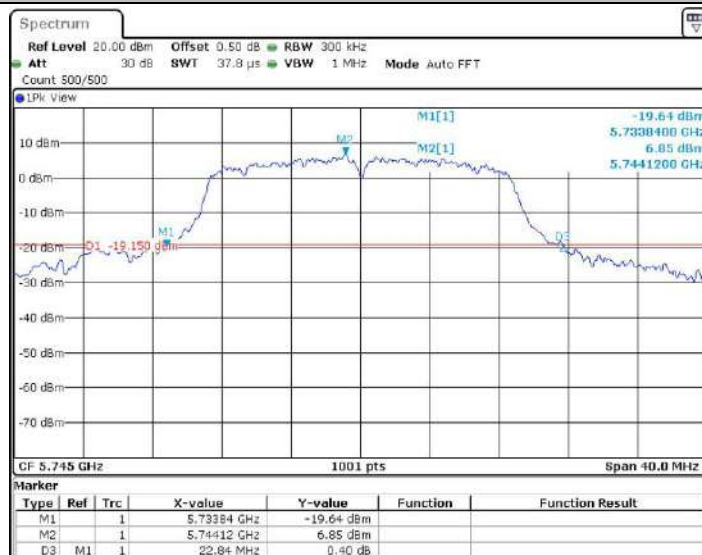


11N20SISO_Ant1_5745

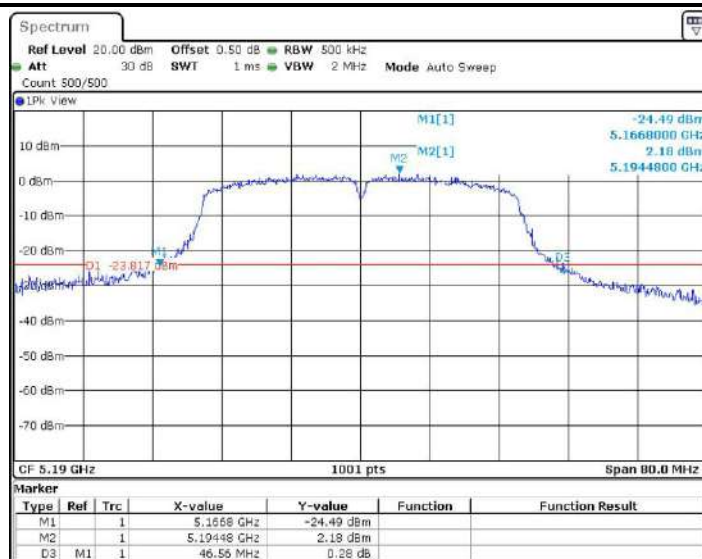


11N40SISO_Ant1_5190

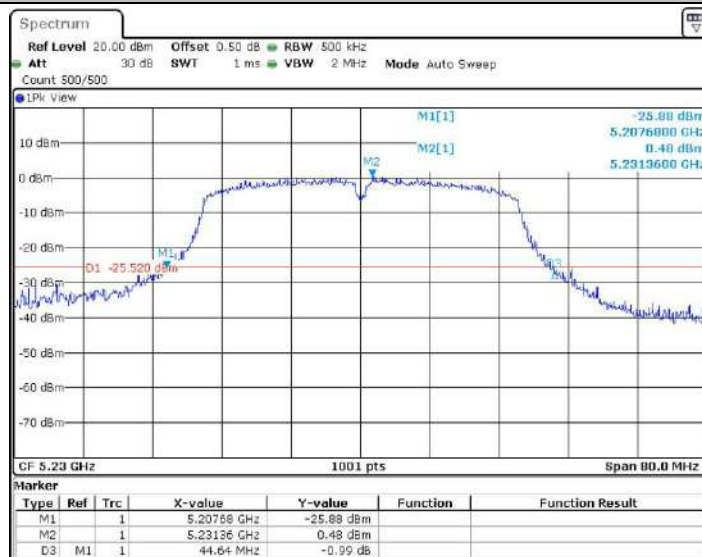

11N40SISO_Ant1_5230

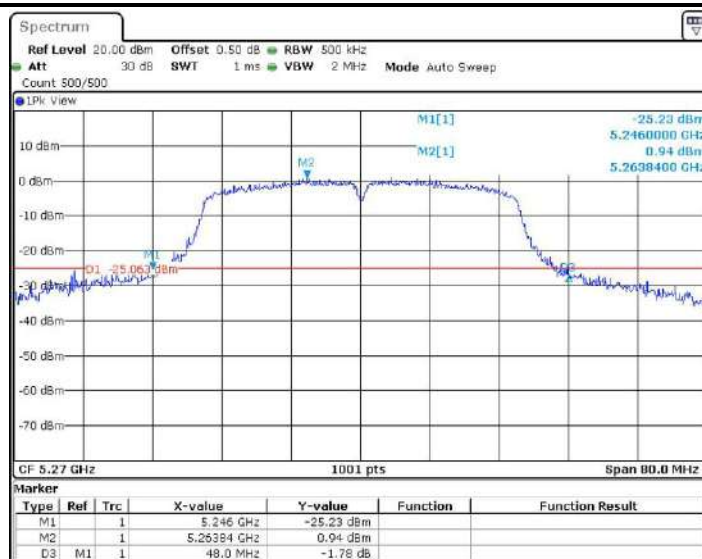


11N40SISO_Ant1_5270

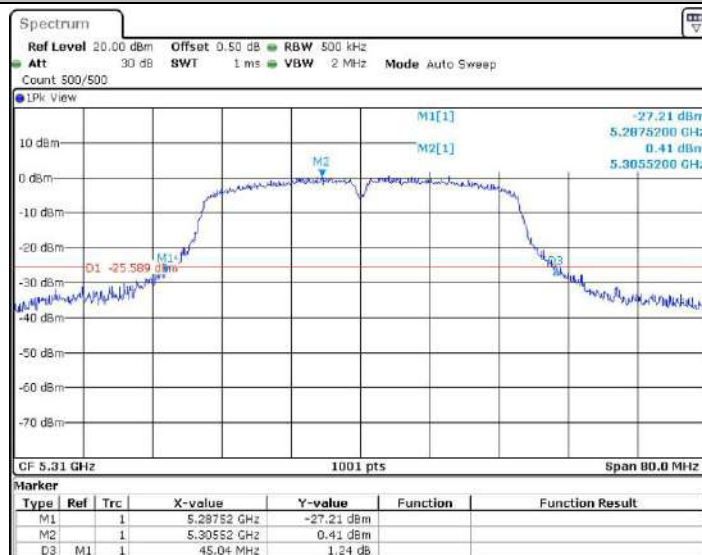


11N40SISO_Ant1_5310




11N40SISO_Ant1_5510

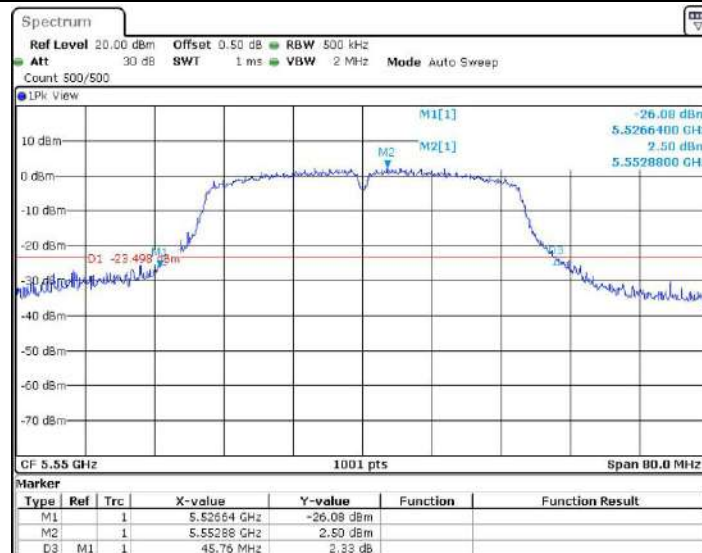


11N40SISO_Ant1_5550

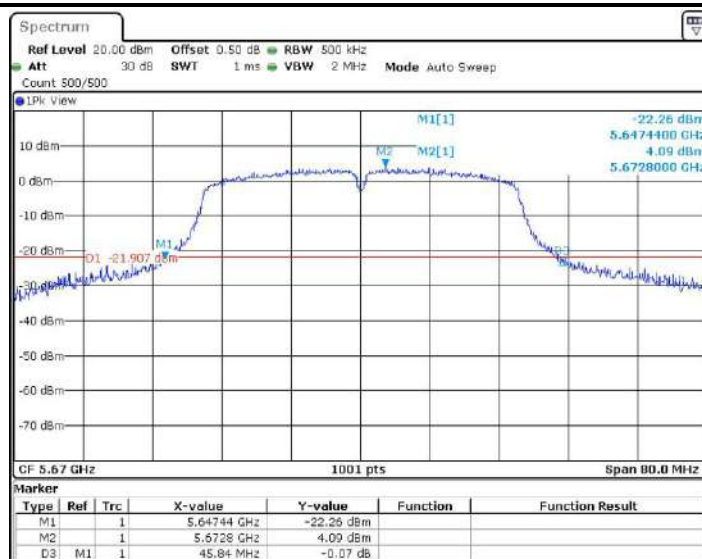


11N40SISO_Ant1_5670

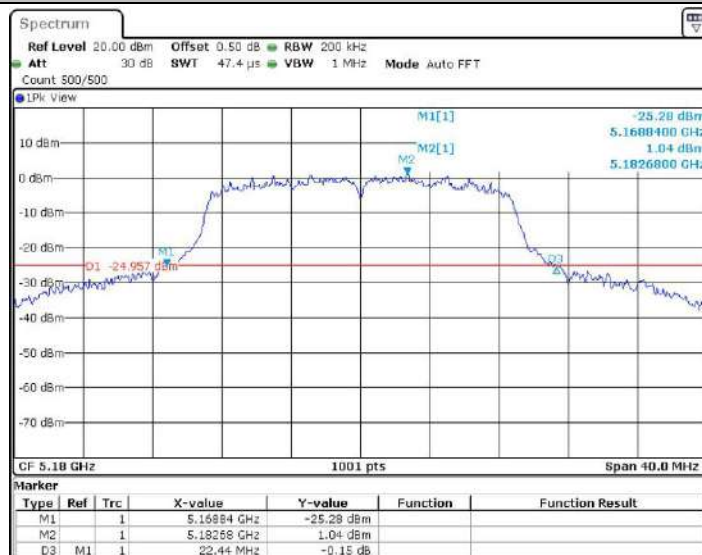


11AC20SISO_Ant1_5180

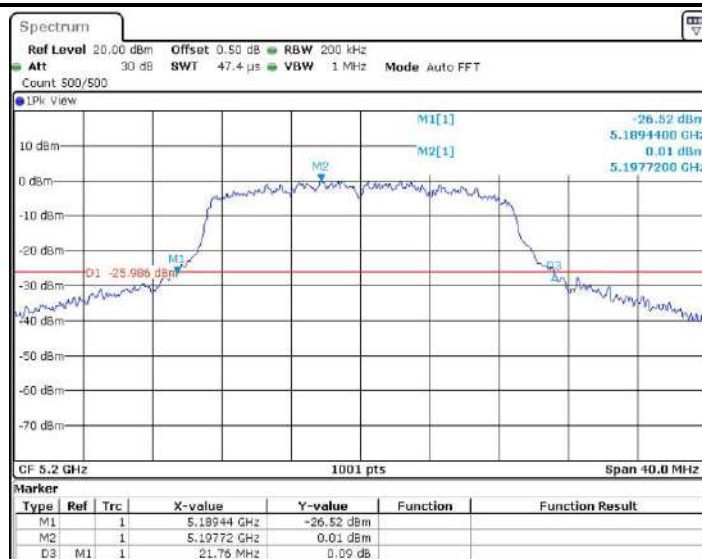

11AC20SISO_Ant1_5200

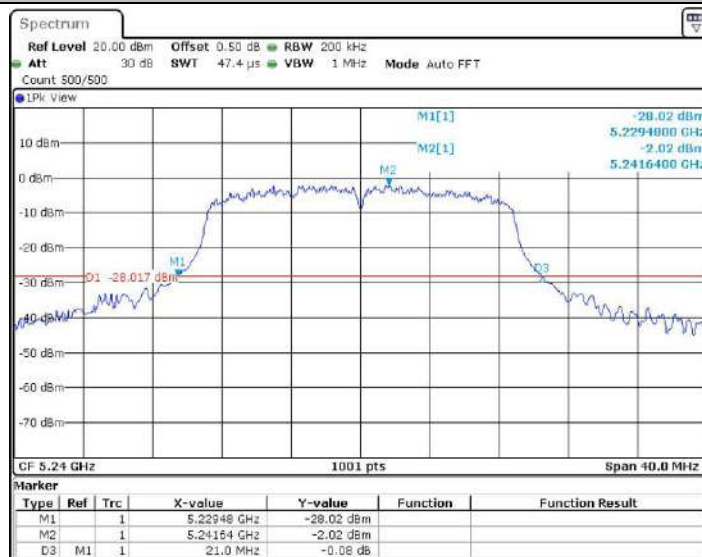


11AC20SISO_Ant1_5240

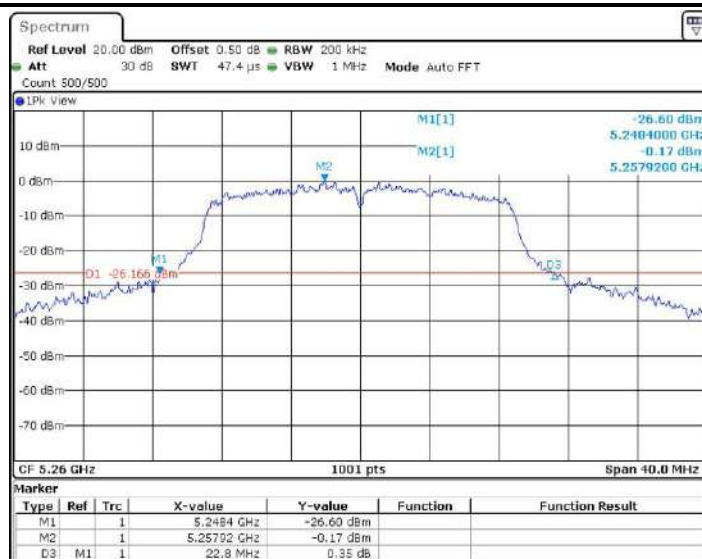


11AC20SISO_Ant1_5260



11AC20SISO_Ant1_5280

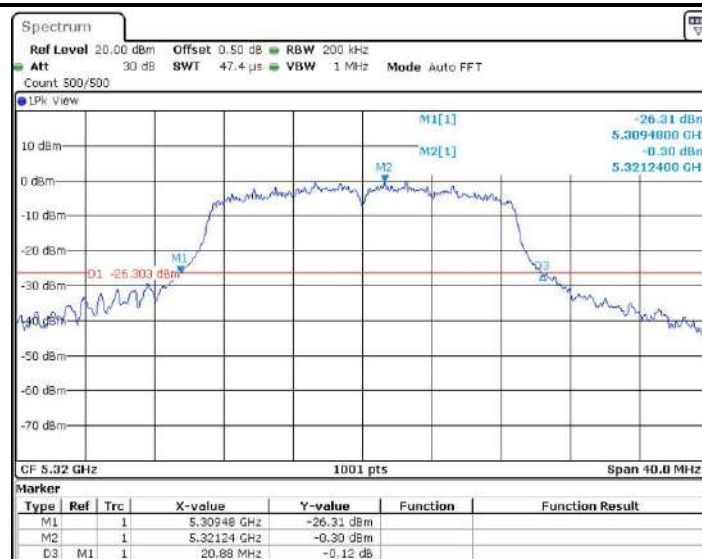


11AC20SISO_Ant1_5320

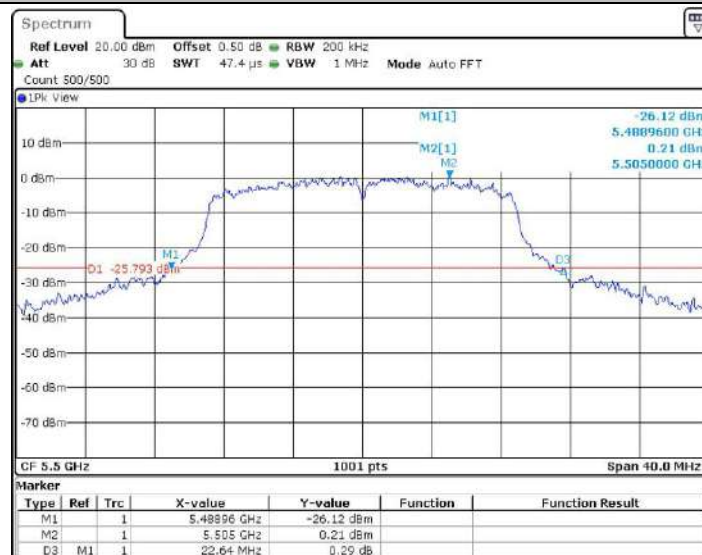


11AC20SISO_Ant1_5500




11AC20SISO_Ant1_5580

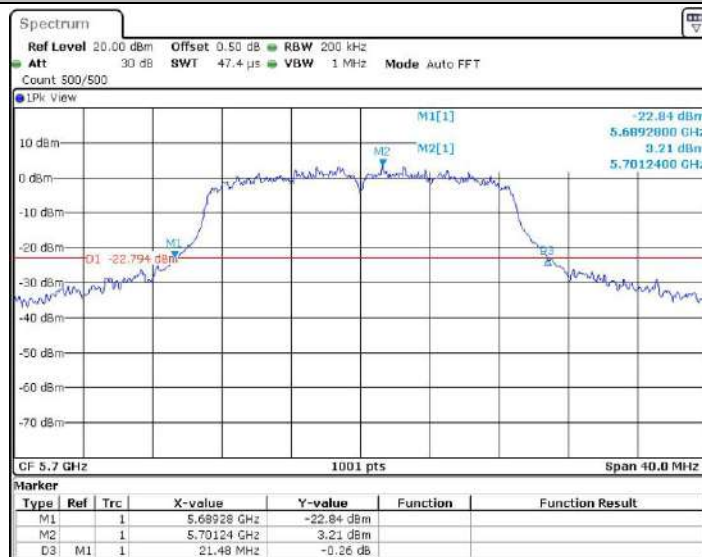


11AC20SISO_Ant1_5700

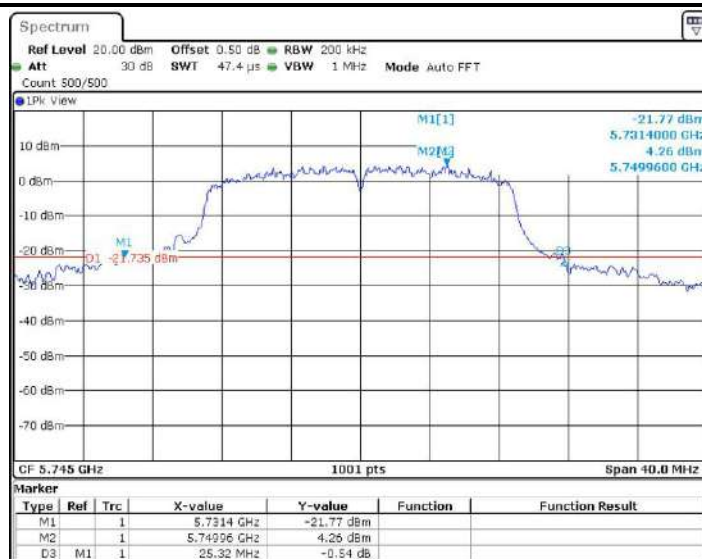


11AC20SISO_Ant1_5745

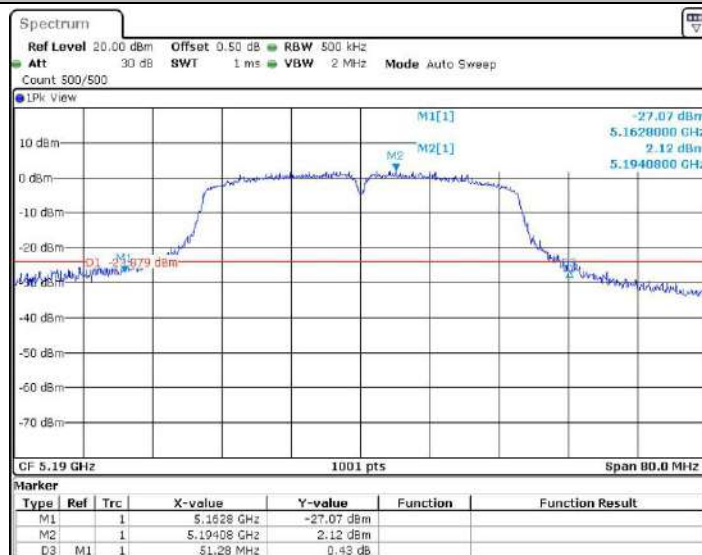


11AC40SISO_Ant1_5190

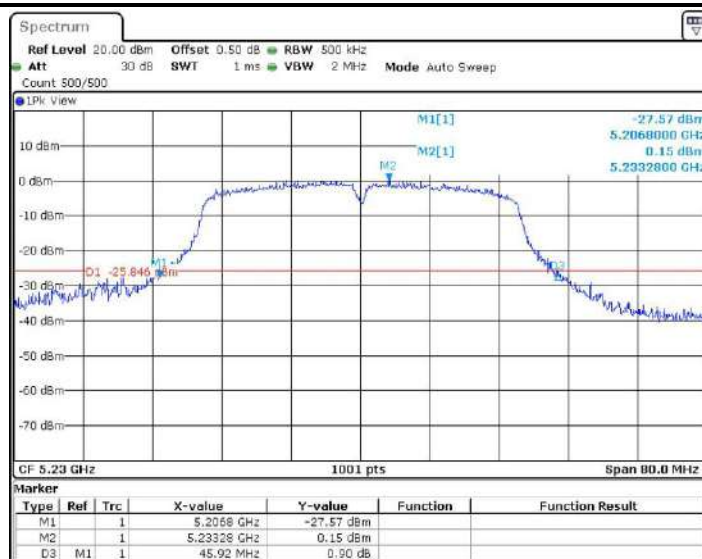

11AC40SISO_Ant1_5230

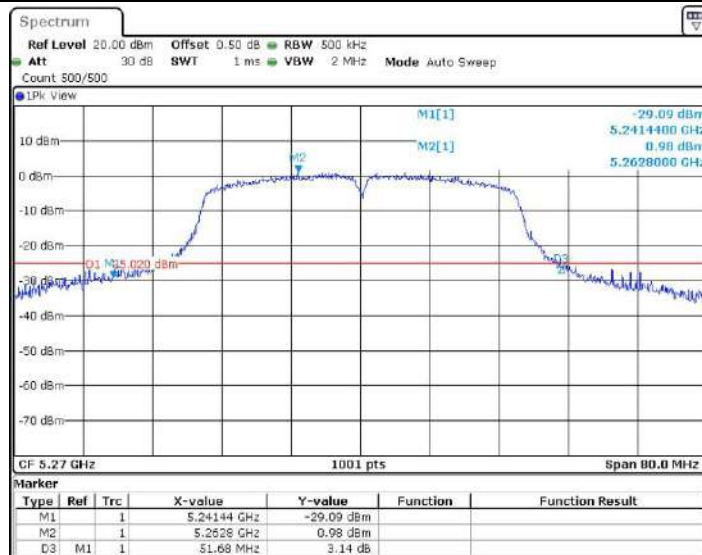


11AC40SISO_Ant1_5270

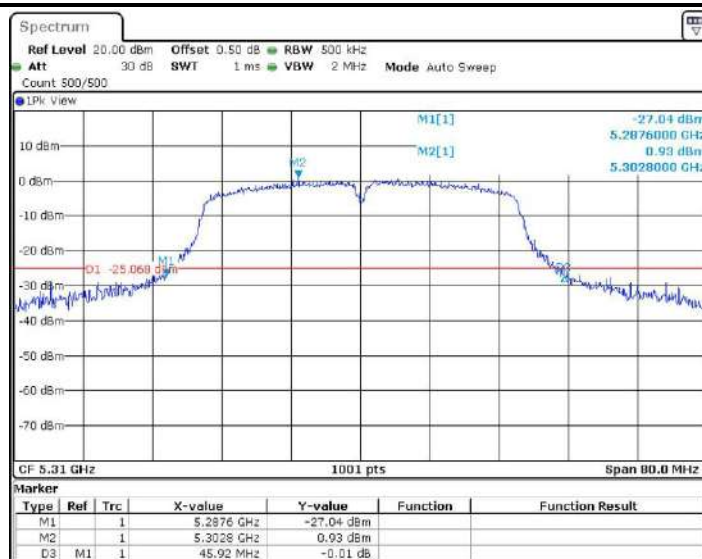

11AC40SISO_Ant1_5310



11AC40SISO_Ant1_5510

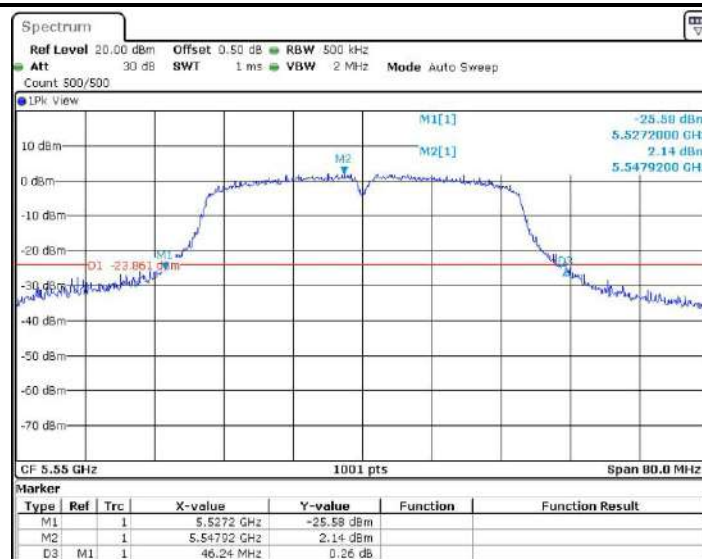


11AC40SISO_Ant1_5550




11AC40SISO_Ant1_5670



11AC80SISO_Ant1_5210

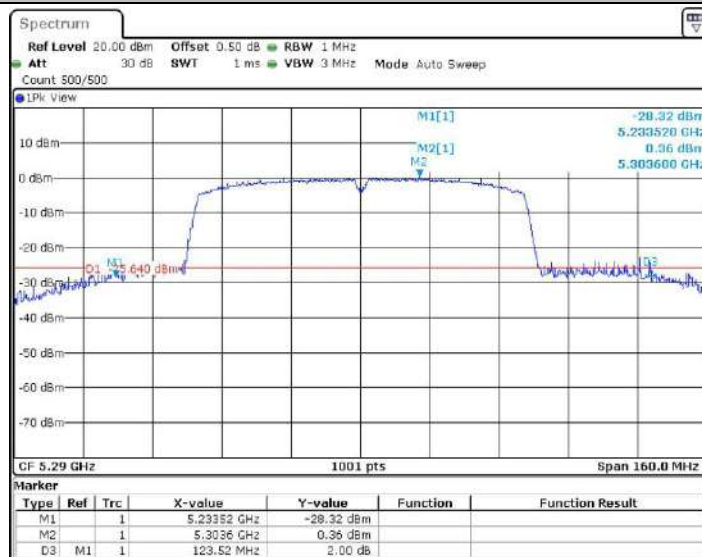

11AC80SISO_Ant1_5290

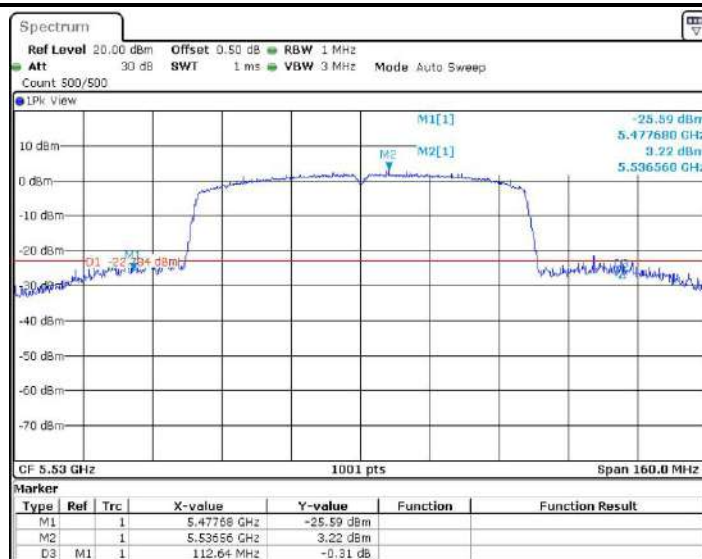

11AC80SISO_Ant1_5530



11AC80SISO_Ant1_5610


Occupied channel bandwidth


Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.463	5171.209	5188.671	---	PASS
		5200	17.383	5191.209	5208.591	---	PASS
		5240	17.303	5231.289	5248.591	---	PASS
		5260	17.502	5251.209	5268.711	---	PASS
		5280	17.383	5271.289	5288.671	---	PASS
		5320	17.343	5311.369	5328.711	---	PASS
		5500	17.502	5491.169	5508.671	---	PASS
		5580	17.343	5571.329	5588.671	---	PASS
		5700	17.782	5691.129	5708.911	---	PASS
		5745	17.822	5736.089	5753.911	---	PASS
		5785	18.062	5775.929	5793.991	---	PASS
		5825	18.022	5815.769	5833.791	---	PASS
11N20SISO	Ant1	5180	18.302	5170.849	5189.151	---	PASS
		5200	18.222	5190.889	5209.111	---	PASS
		5240	18.102	5230.929	5249.031	---	PASS
		5260	18.302	5250.809	5269.111	---	PASS
		5280	18.222	5270.889	5289.111	---	PASS
		5320	18.182	5310.969	5329.151	---	PASS
		5500	18.302	5490.889	5509.191	---	PASS
		5580	18.102	5571.009	5589.111	---	PASS
		5700	18.302	5690.889	5709.191	---	PASS
		5745	18.501	5735.769	5754.271	---	PASS
		5785	18.901	5775.649	5794.550	---	PASS
		5825	18.581	5815.649	5834.231	---	PASS
11N40SISO	Ant1	5190	37.003	5171.459	5208.462	---	PASS
		5230	37.003	5211.459	5248.462	---	PASS
		5270	37.003	5251.459	5288.462	---	PASS
		5310	36.763	5291.778	5328.541	---	PASS
		5510	37.163	5491.459	5528.621	---	PASS
		5550	36.923	5531.698	5568.621	---	PASS
		5670	37.163	5651.459	5688.621	---	PASS
		5755	37.722	5736.299	5774.021	---	PASS
		5795	37.722	5776.059	5813.781	---	PASS
11AC20SISO	Ant1	5180	18.302	5170.849	5189.151	---	PASS
		5200	18.262	5190.849	5209.111	---	PASS
		5240	18.182	5230.889	5249.071	---	PASS

		5260	18.342	5250.809	5269.151	---	PASS
		5280	18.262	5270.889	5289.151	---	PASS
		5320	18.222	5310.969	5329.191	---	PASS
		5500	18.302	5490.849	5509.151	---	PASS
		5580	18.182	5570.929	5589.111	---	PASS
		5700	18.382	5690.849	5709.231	---	PASS
		5745	18.741	5735.569	5754.311	---	PASS
		5785	18.861	5775.410	5794.271	---	PASS
		5825	18.621	5815.609	5834.231	---	PASS
11AC40SISO	Ant1	5190	37.163	5171.299	5208.462	---	PASS
		5230	36.923	5211.459	5248.382	---	PASS
		5270	37.083	5251.459	5288.541	---	PASS
		5310	36.923	5291.698	5328.621	---	PASS
		5510	37.163	5491.459	5528.621	---	PASS
		5550	37.083	5531.538	5568.621	---	PASS
		5670	37.243	5651.459	5688.701	---	PASS
		5755	37.483	5736.379	5773.861	---	PASS
		5795	37.802	5775.899	5813.701	---	PASS
11AC80SISO	Ant1	5210	76.244	5171.638	5247.882	---	PASS
		5290	75.764	5252.278	5328.042	---	PASS
		5530	75.445	5492.438	5567.882	---	PASS
		5610	75.604	5572.118	5647.722	---	PASS
		5775	76.563	5737.118	5813.681	---	PASS

Test Graphs

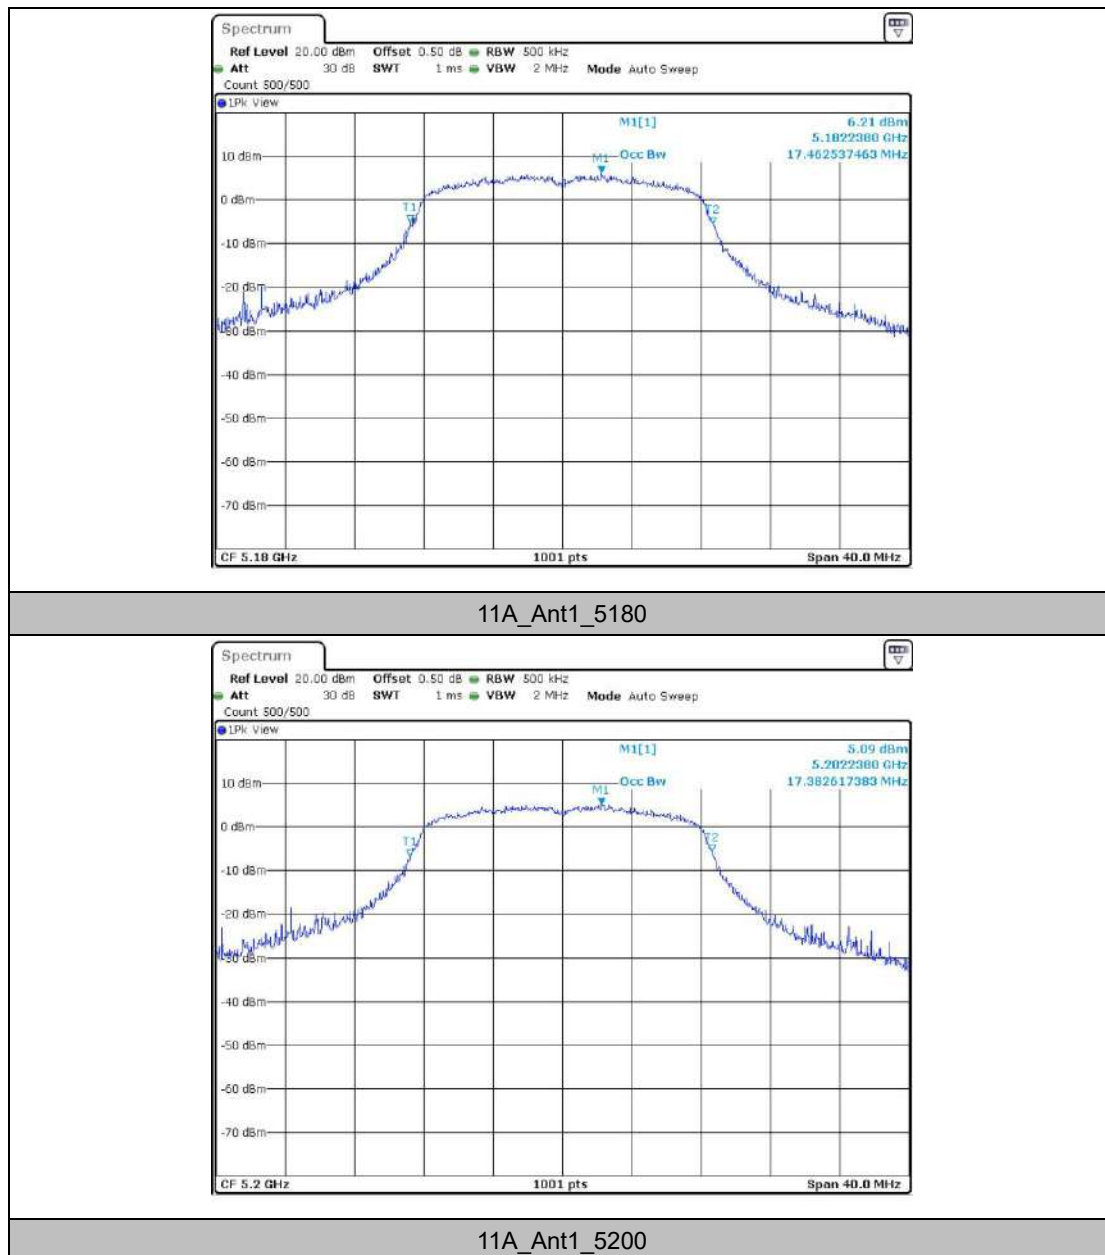

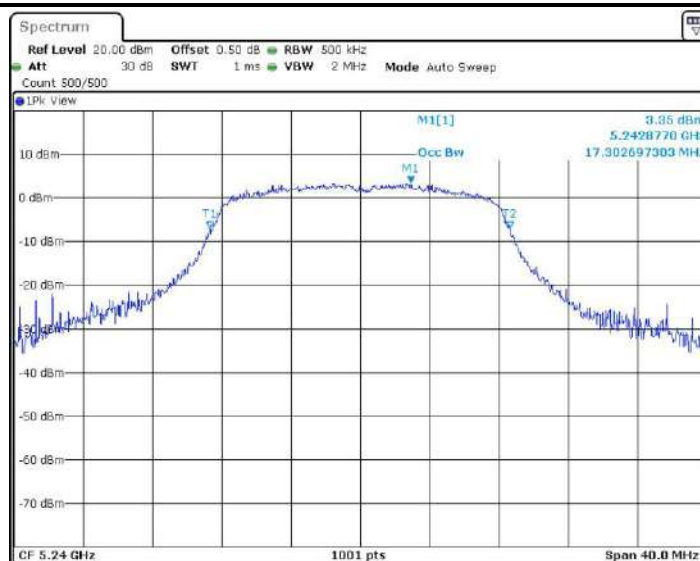


11A_Ant1_5240




11A_Ant1_5260




11A_Ant1_5280

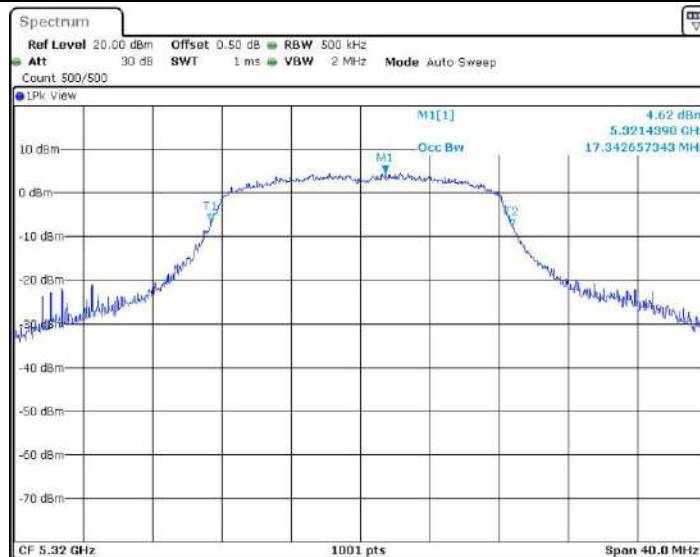


11A_Ant1_5320

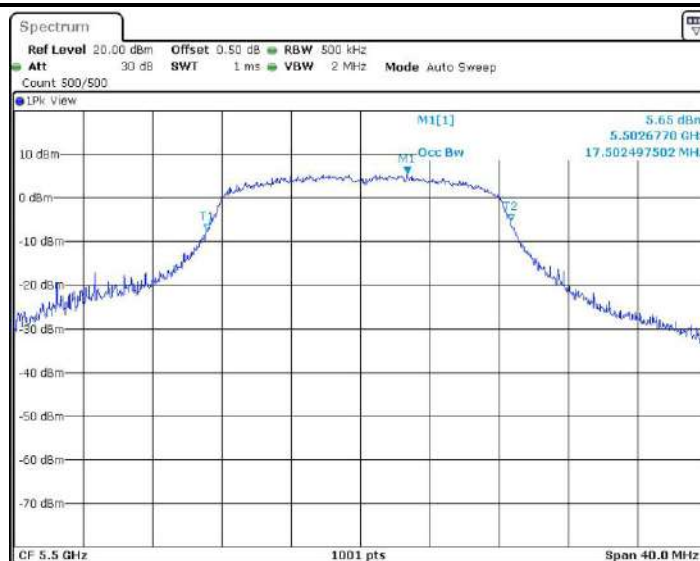


11A_Ant1_5500

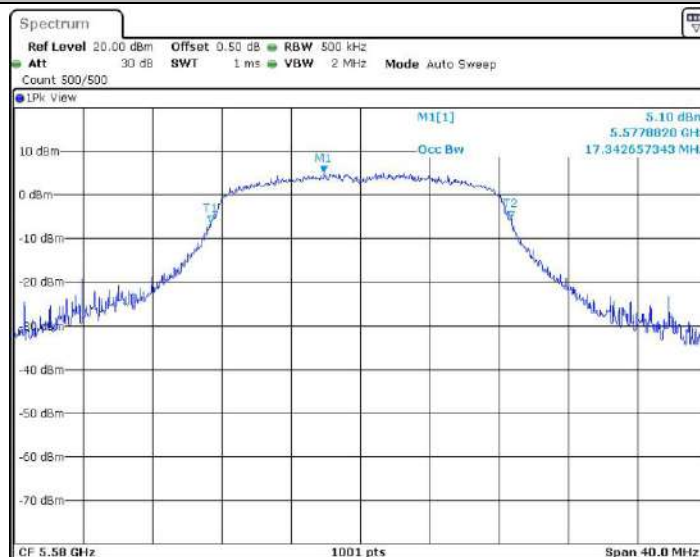

11A_Ant1_5580

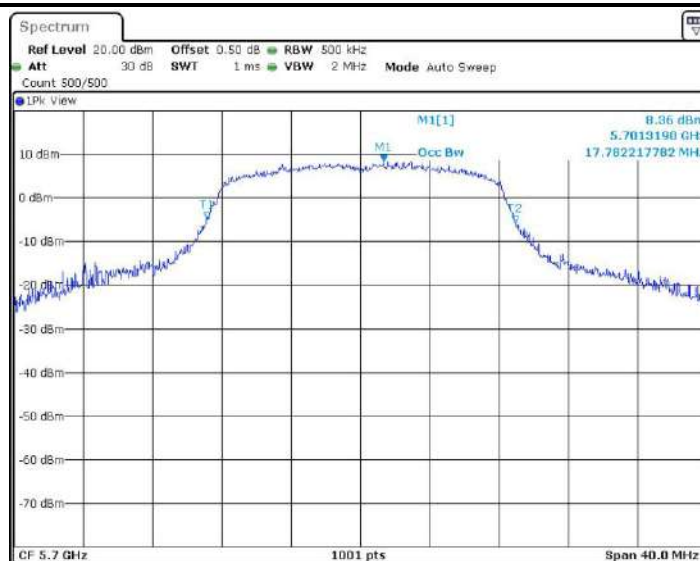


11A_Ant1_5700

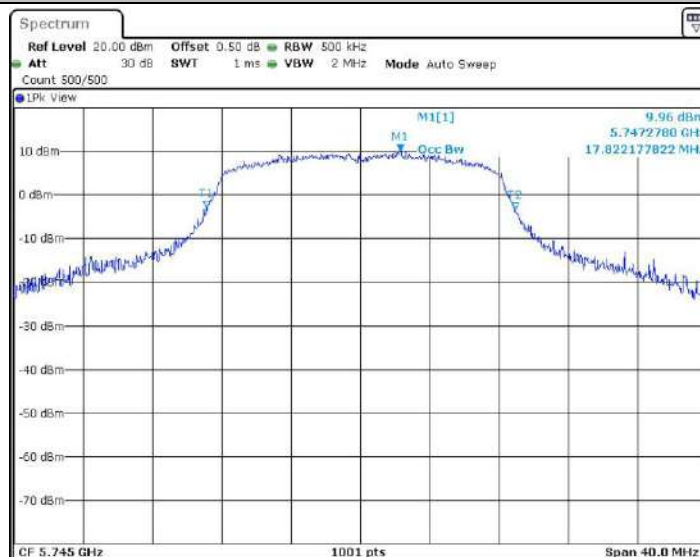

11A_Ant1_5745



11A_Ant1_5785

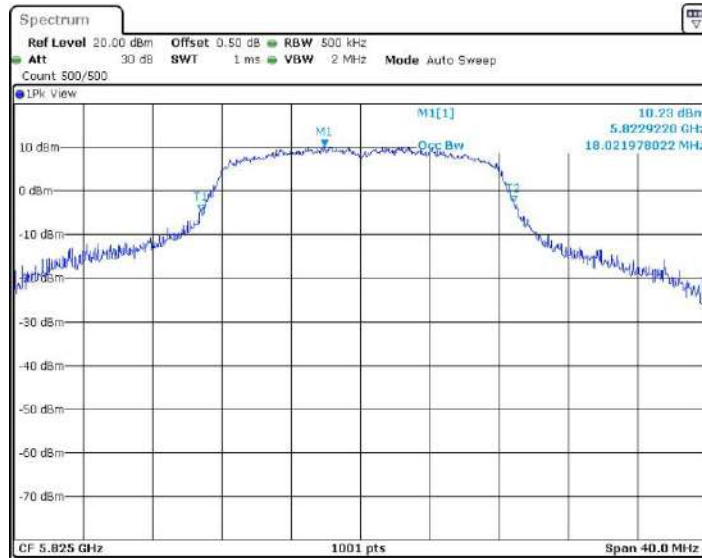


11A_Ant1_5825



11N20SISO_Ant1_5180



11N20SISO_Ant1_5200

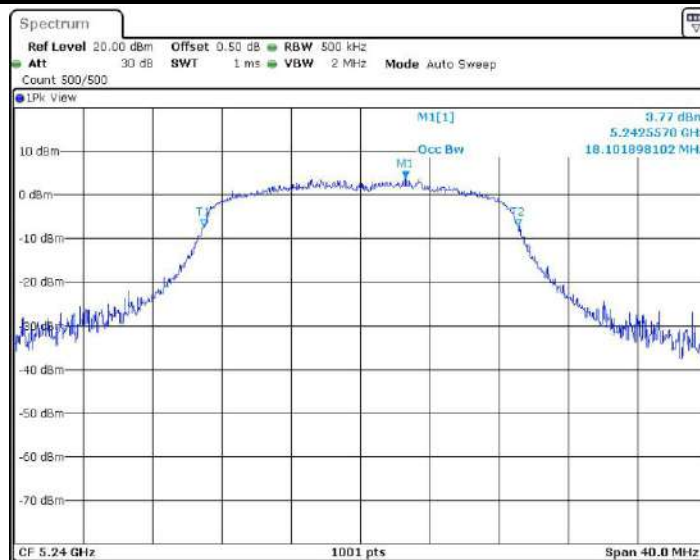

11N20SISO_Ant1_5240




11N20SISO_Ant1_5260




11N20SISO_Ant1_5280



11N20SISO_Ant1_5320

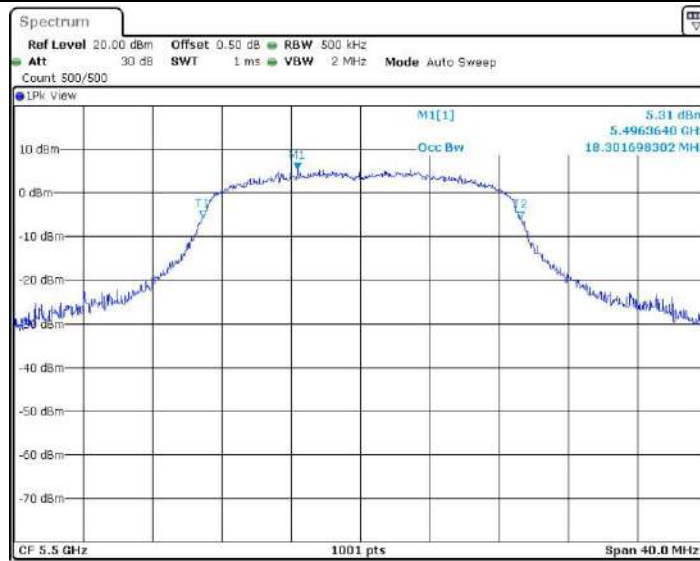


11N20SISO_Ant1_5500

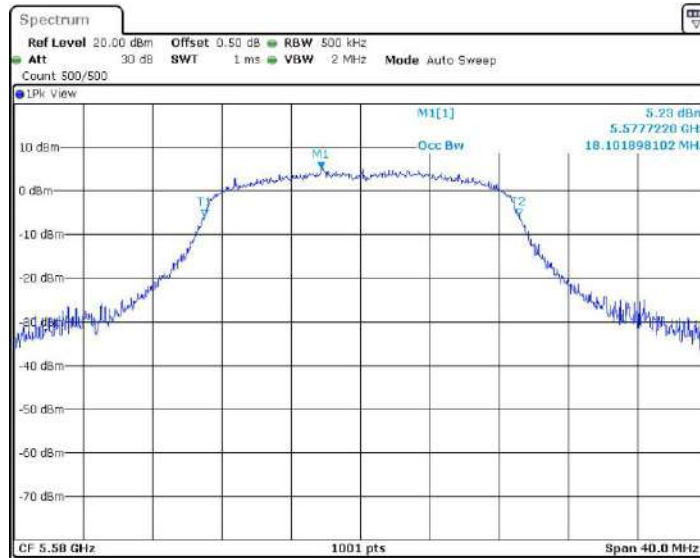


11N20SISO_Ant1_5580




11N20SISO_Ant1_5700

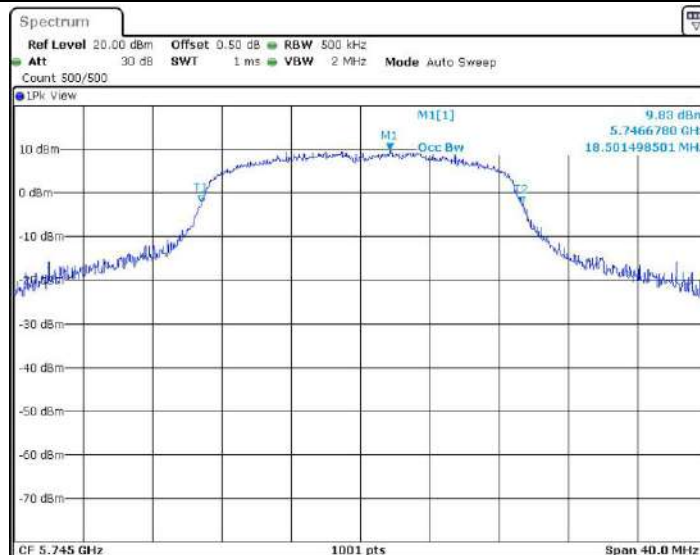

11N20SISO_Ant1_5745

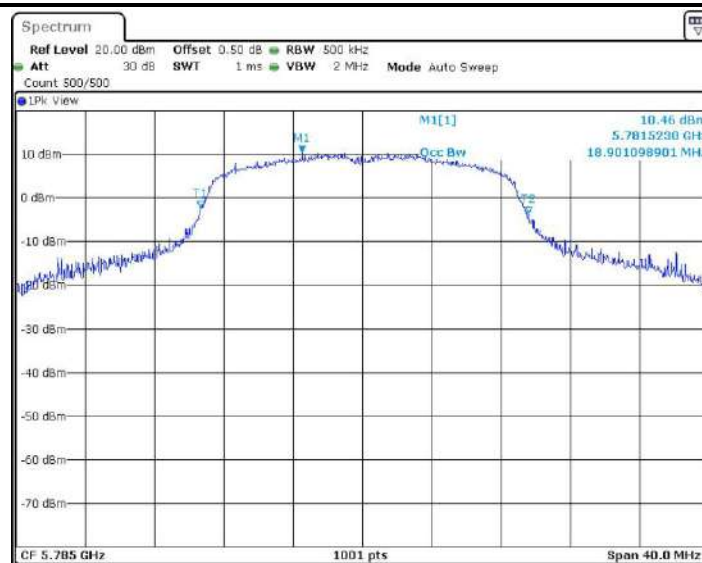

11N20SISO_Ant1_5785

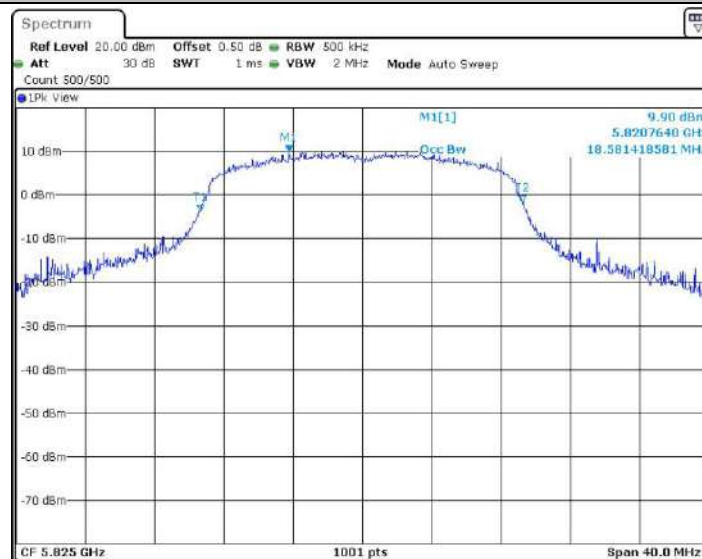


11N20SISO_Ant1_5825



11N40SISO_Ant1_5190



11N40SISO_Ant1_5230

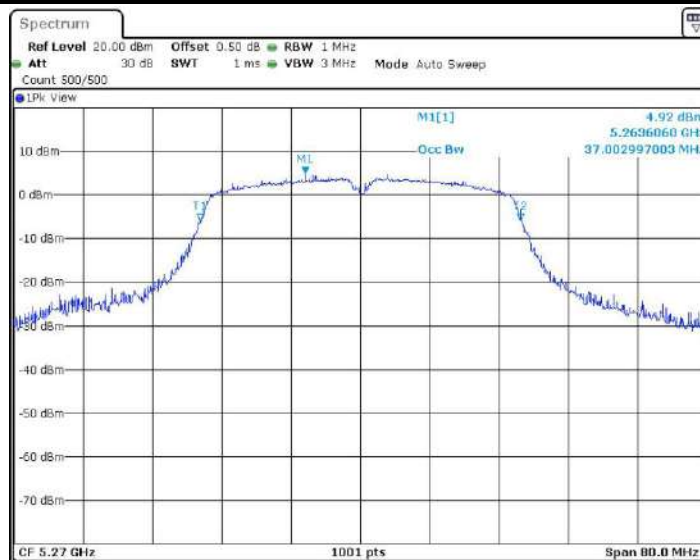

11N40SISO_Ant1_5270




11N40SISO_Ant1_5310




11N40SISO_Ant1_5510



11N40SISO_Ant1_5550

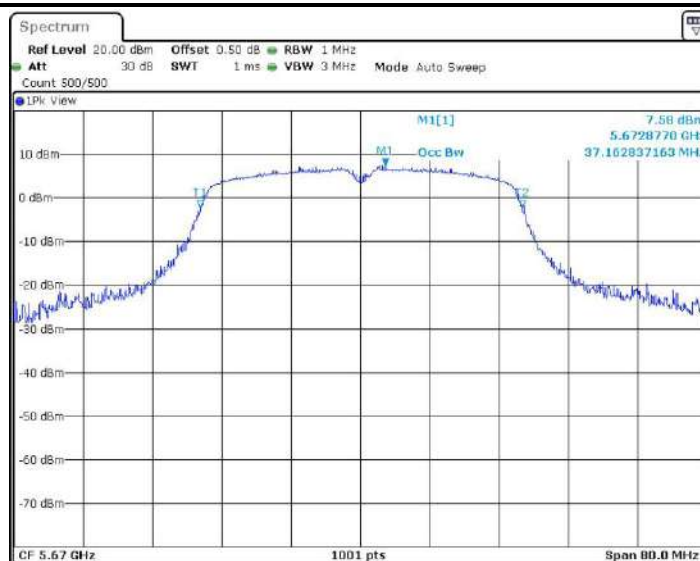

11N40SISO_Ant1_5670

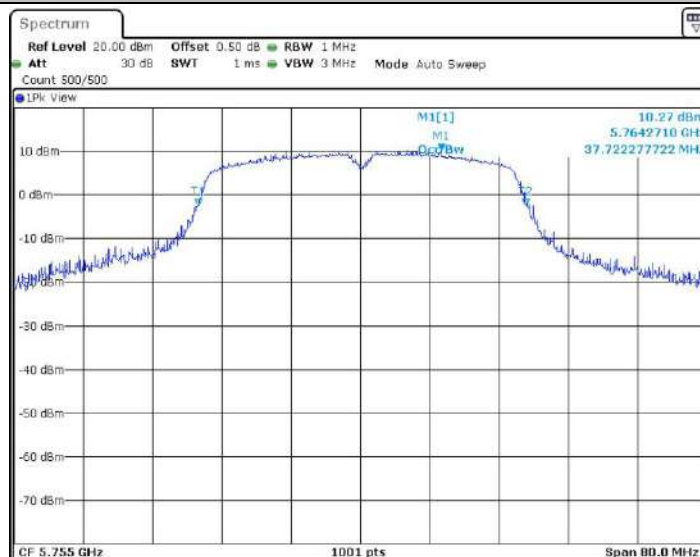

11N40SISO_Ant1_5755




11N40SISO_Ant1_5795




11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200

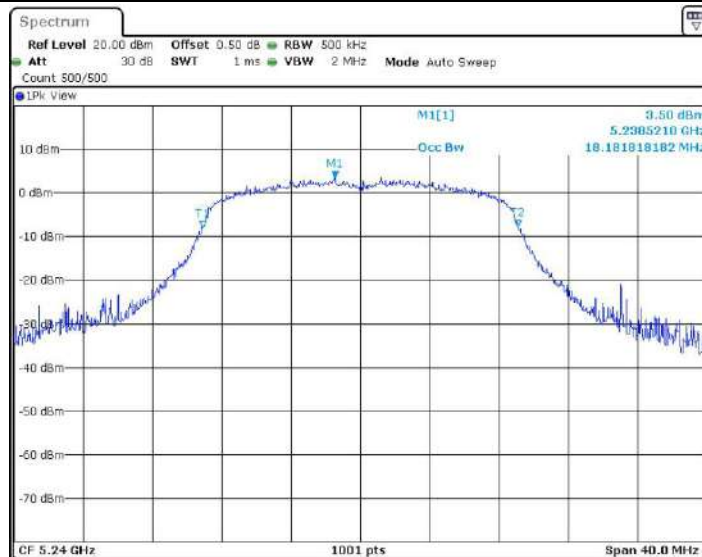


11AC20SISO_Ant1_5240

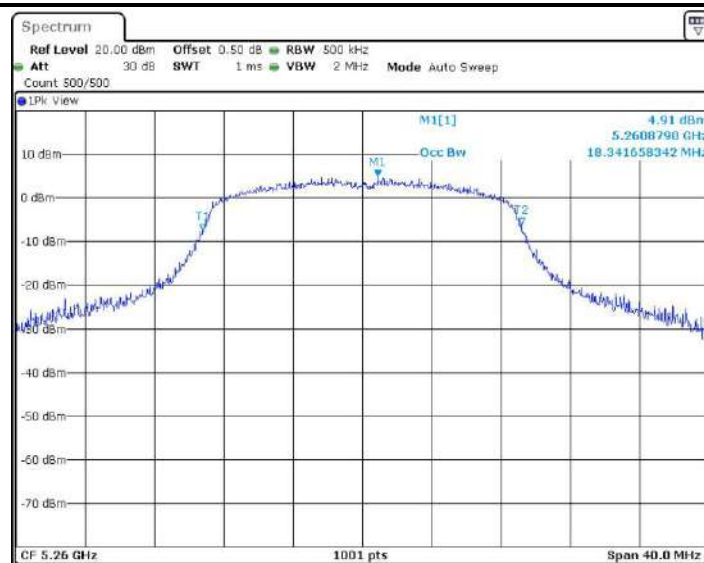


11AC20SISO_Ant1_5260



11AC20SISO_Ant1_5280

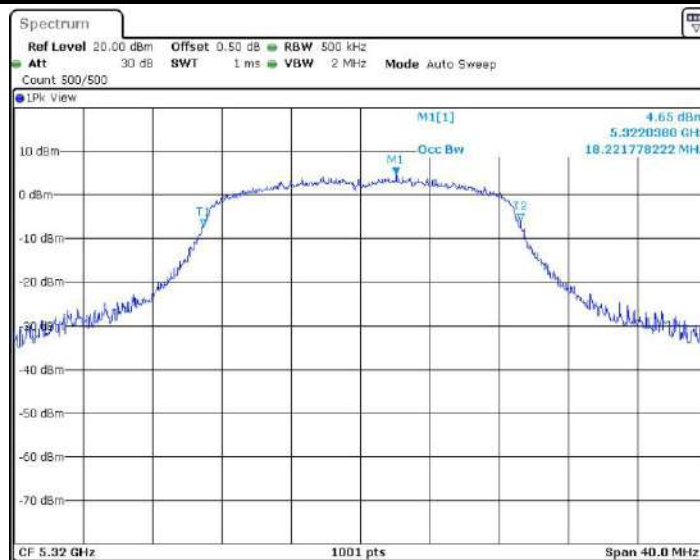


11AC20SISO_Ant1_5320

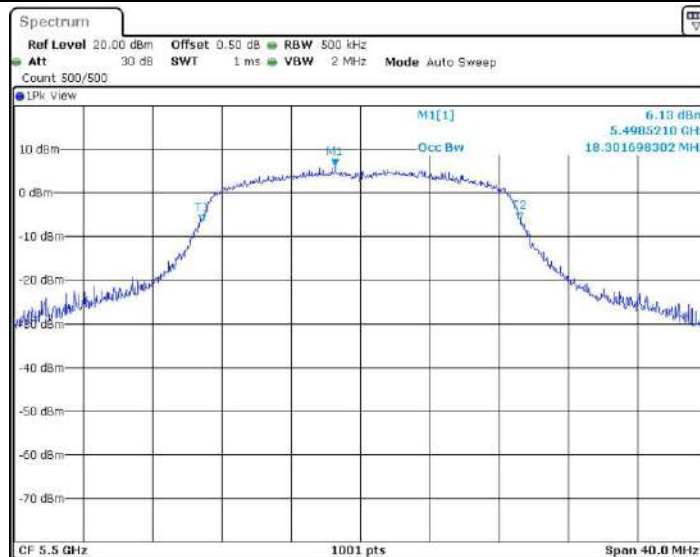


11AC20SISO_Ant1_5500




11AC20SISO_Ant1_5580

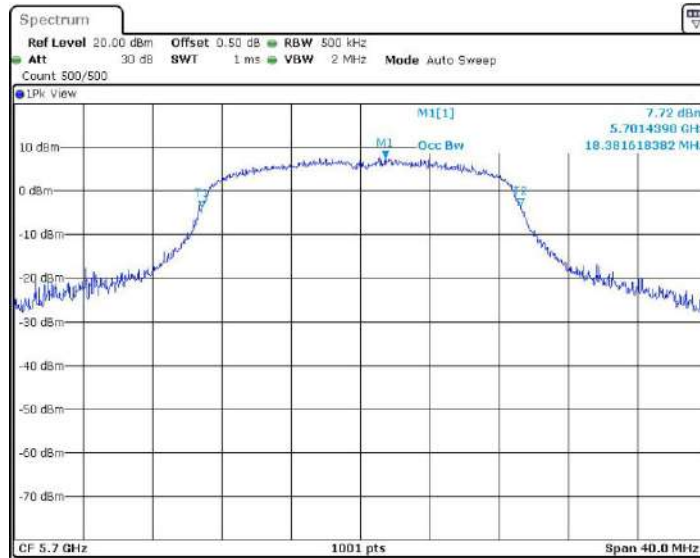

11AC20SISO_Ant1_5700

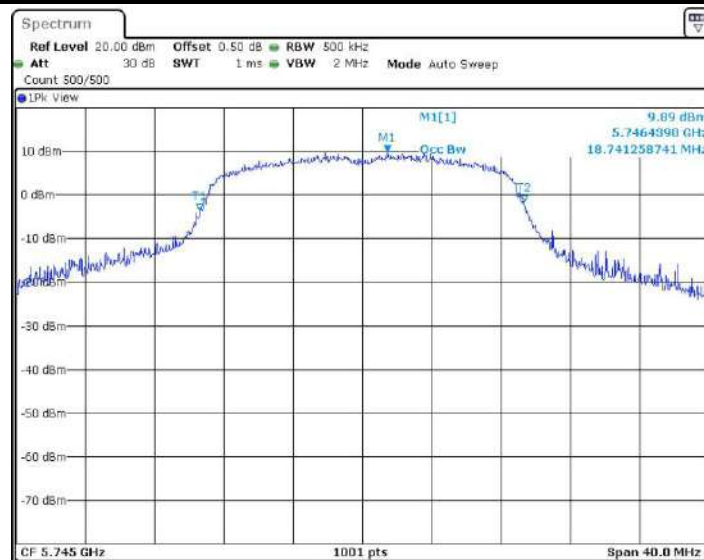

11AC20SISO_Ant1_5745

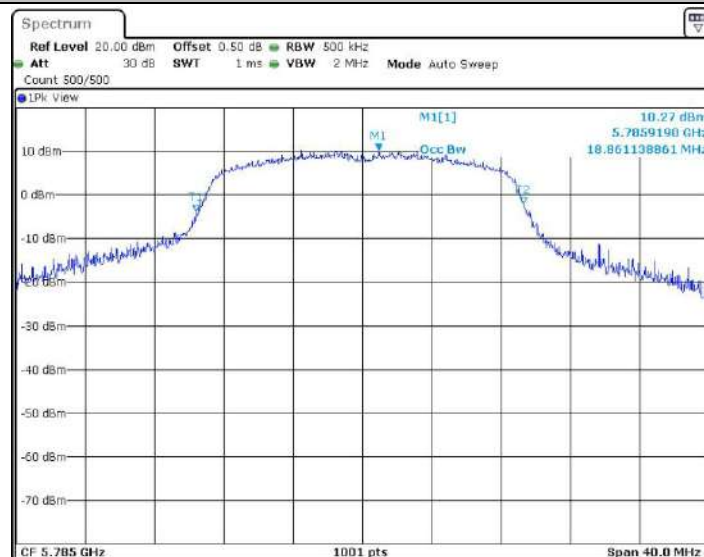

11AC20SISO_Ant1_5785



11AC20SISO_Ant1_5825



11AC40SISO_Ant1_5190



11AC40SISO_Ant1_5230




11AC40SISO_Ant1_5270




11AC40SISO_Ant1_5310




11AC40SISO_Ant1_5510

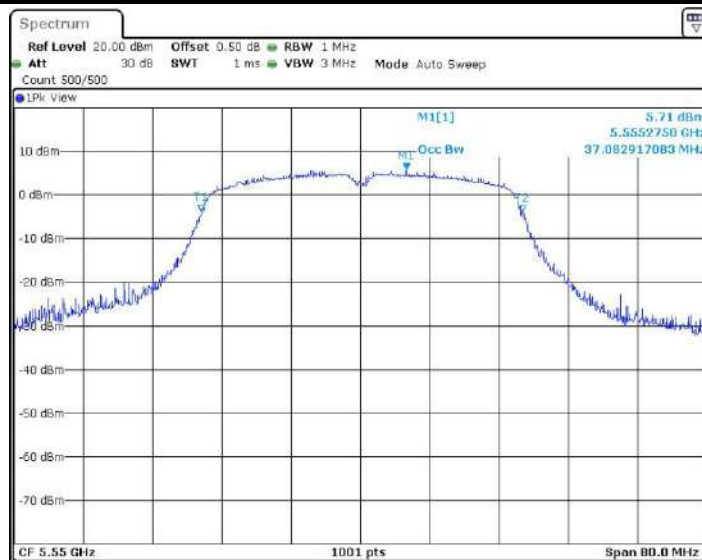

11AC40SISO_Ant1_5550

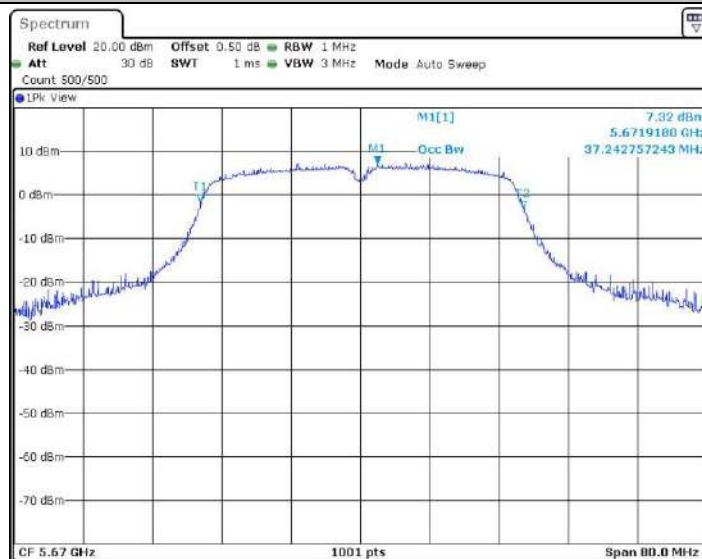


11AC40SISO_Ant1_5670

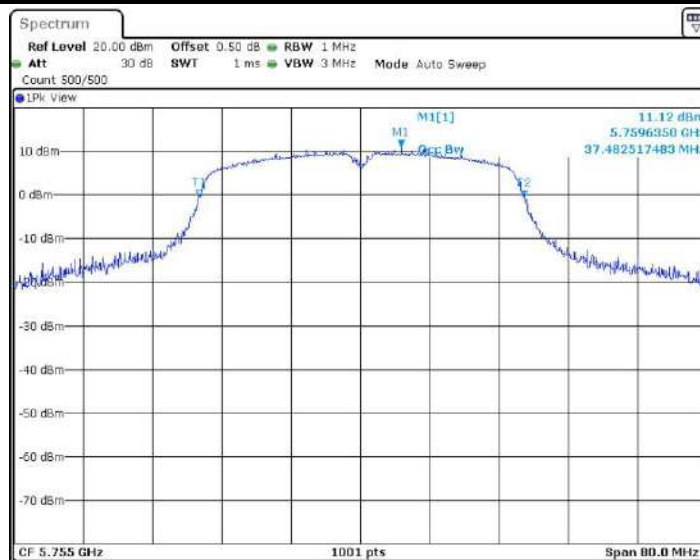


11AC40SISO_Ant1_5755




11AC40SISO_Ant1_5795

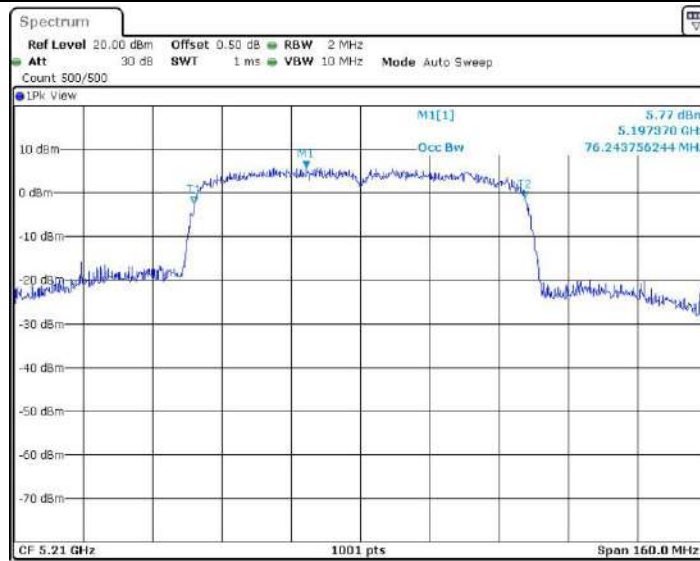


11AC80SISO_Ant1_5210

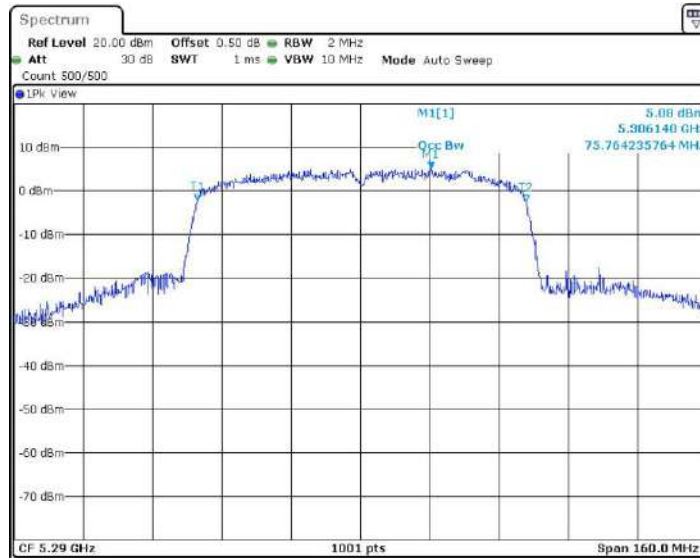


11AC80SISO_Ant1_5290

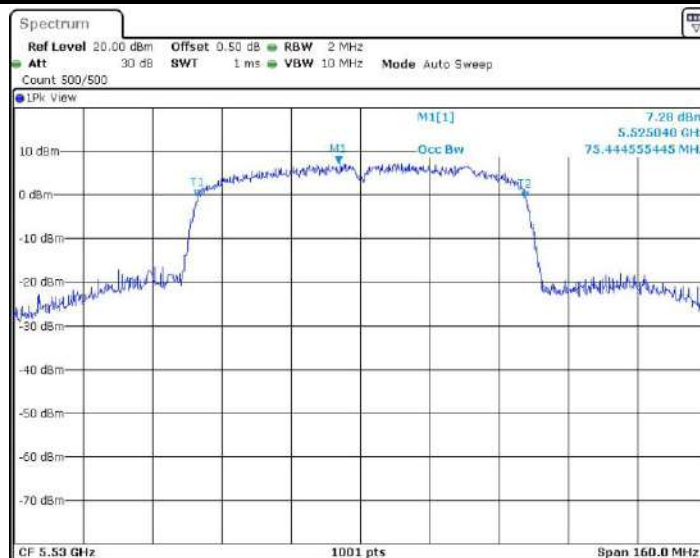

11AC80SISO_Ant1_5530

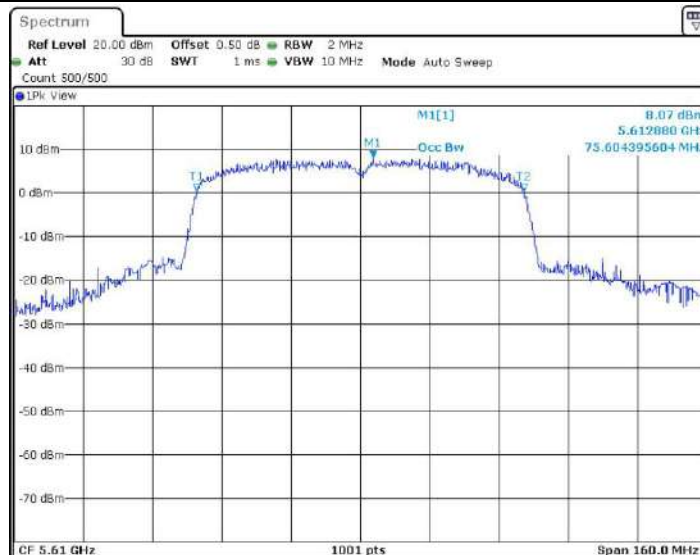

11AC80SISO_Ant1_5610

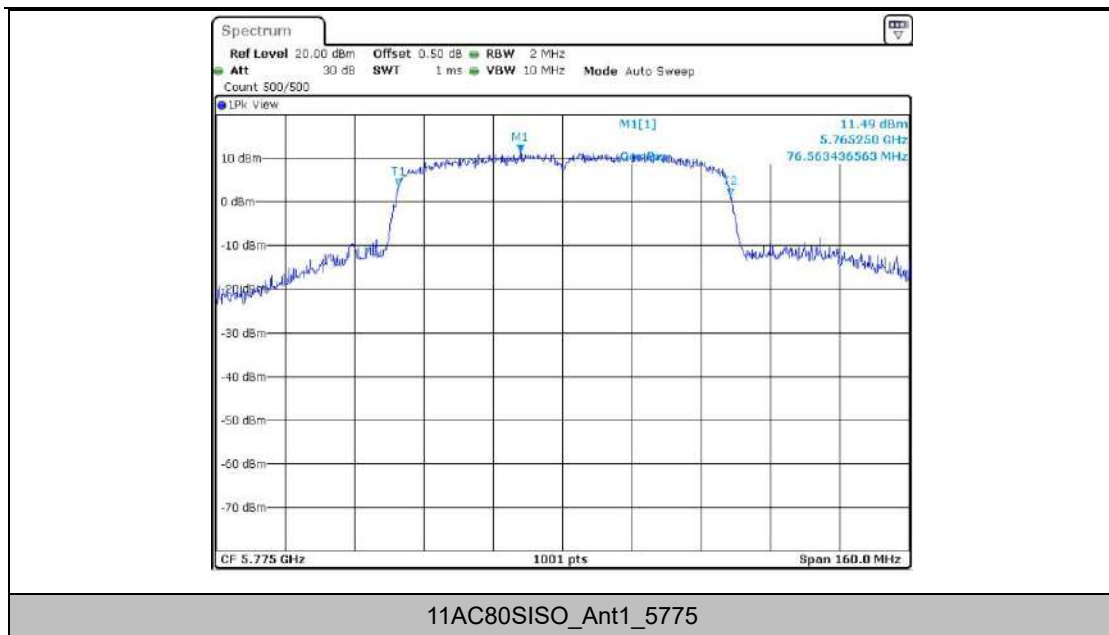



Min emission bandwidth

Test Result


TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.440	5737.160	5752.600	0.5	PASS
		5785	15.200	5777.360	5792.560	0.5	PASS
		5825	15.880	5817.040	5832.920	0.5	PASS
11N20SISO	Ant1	5745	15.440	5737.360	5752.800	0.5	PASS
		5785	15.160	5777.360	5792.520	0.5	PASS
		5825	15.240	5817.360	5832.600	0.5	PASS
11N40SISO	Ant1	5755	35.200	5737.400	5772.600	0.5	PASS
		5795	35.280	5777.400	5812.680	0.5	PASS
11AC20SISO	Ant1	5745	16.120	5737.040	5753.160	0.5	PASS
		5785	16.880	5776.520	5793.400	0.5	PASS
		5825	16.000	5817.160	5833.160	0.5	PASS
11AC40SISO	Ant1	5755	35.200	5737.400	5772.600	0.5	PASS
		5795	35.280	5777.400	5812.680	0.5	PASS
11AC80SISO	Ant1	5775	68.000	5744.760	5812.760	0.5	PASS

Test Graphs

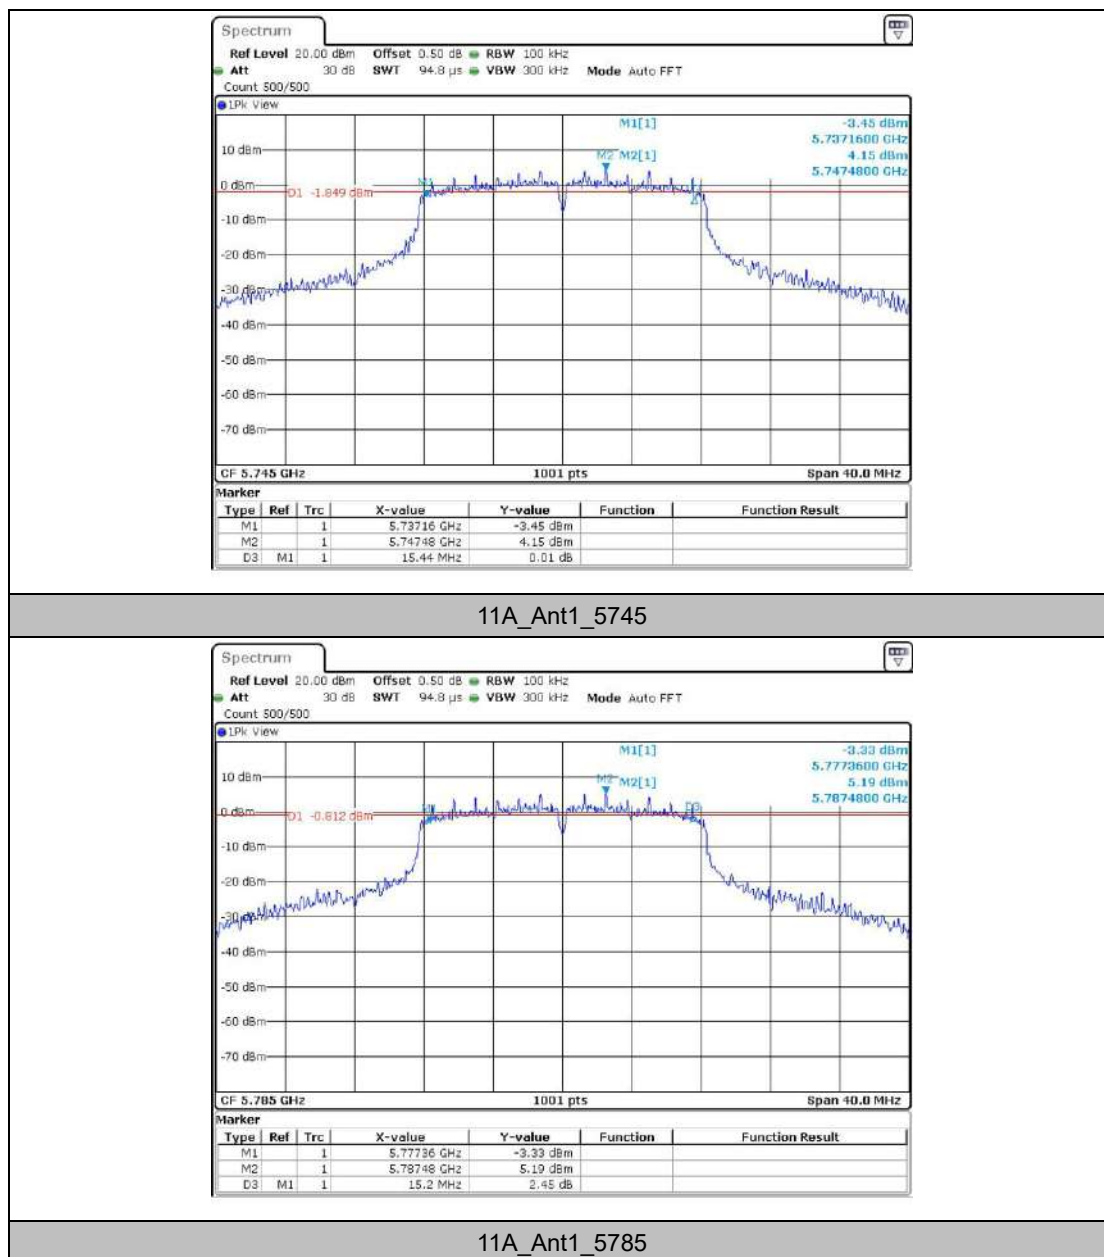


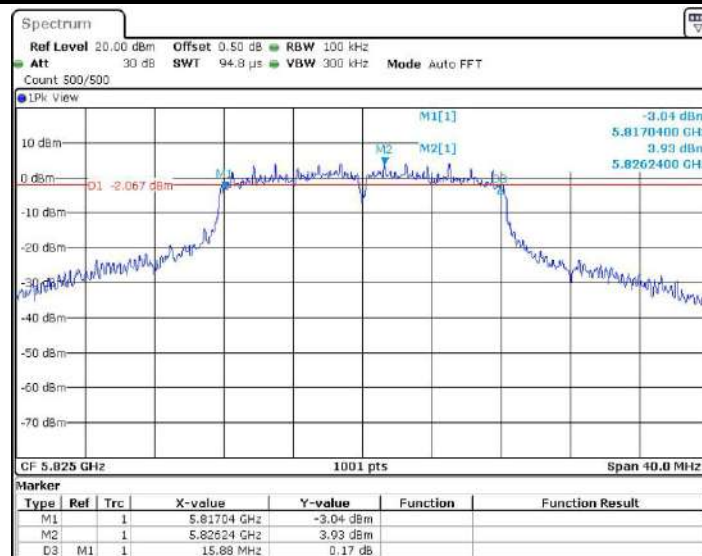


11A_Ant1_5825

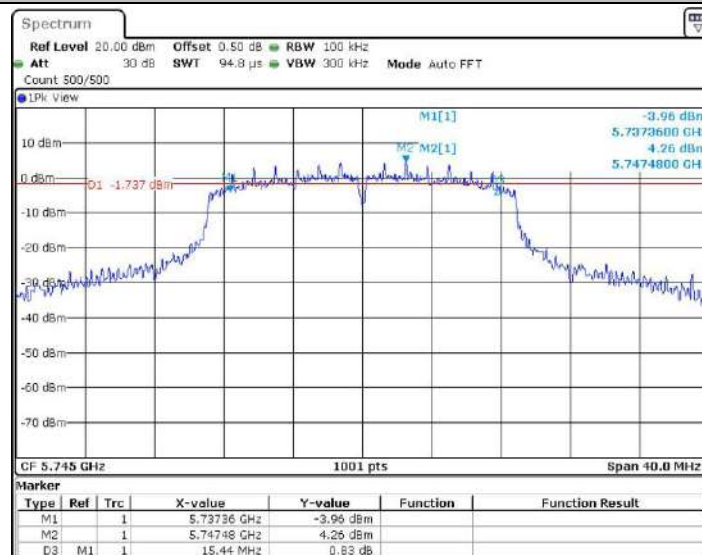


11N20SISO_Ant1_5745

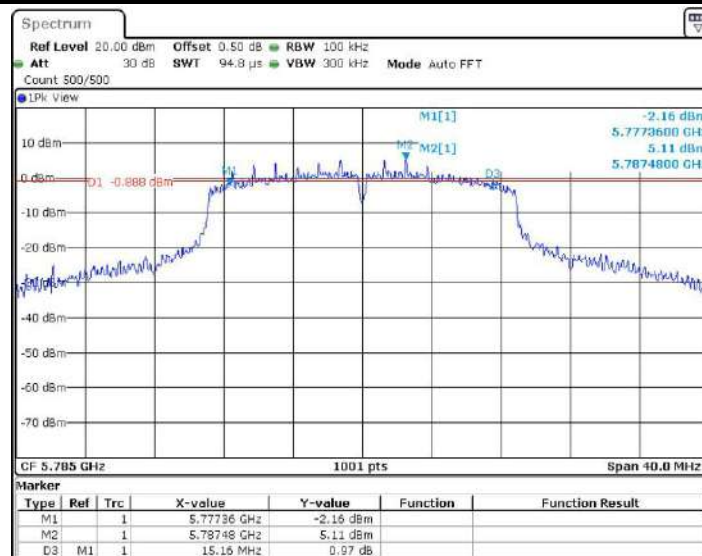


11N20SISO_Ant1_5785

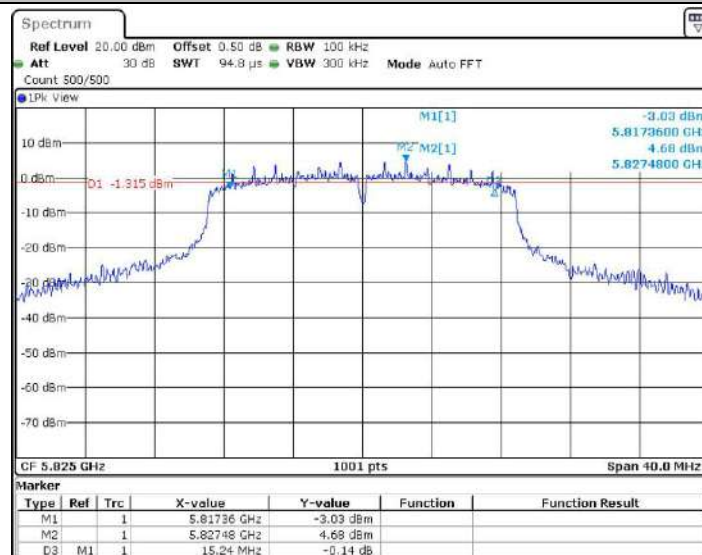


11N20SISO_Ant1_5825

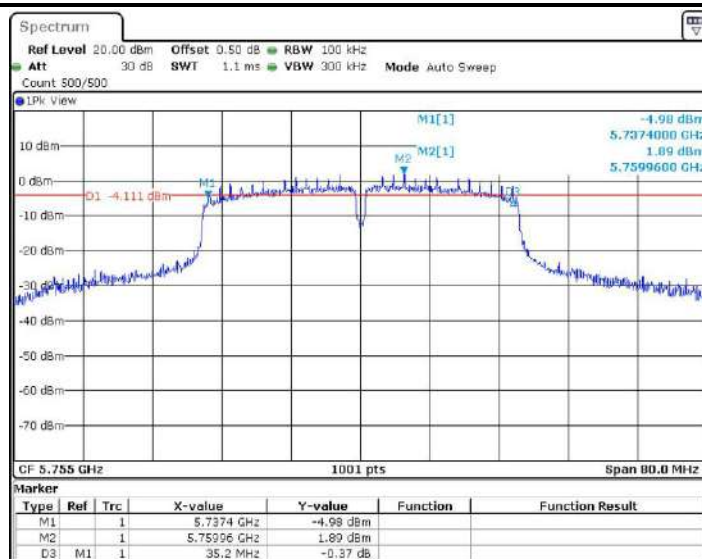


11N40SISO_Ant1_5755

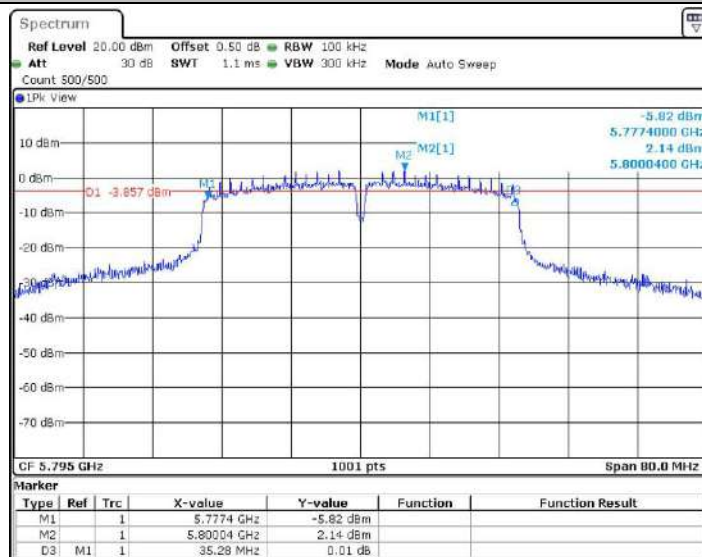


11N40SISO_Ant1_5795

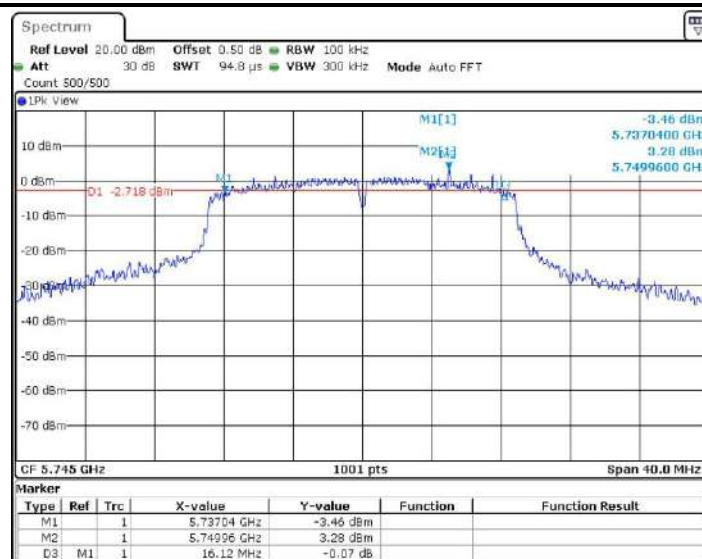


11AC20SISO_Ant1_5745

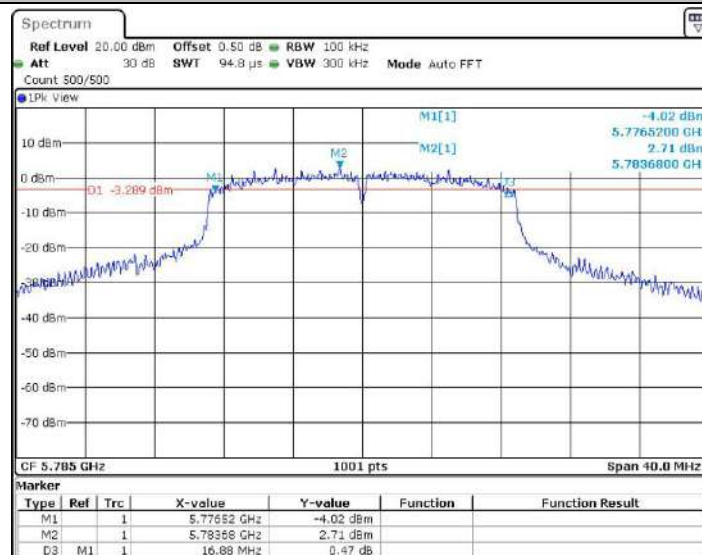


11AC20SISO_Ant1_5785

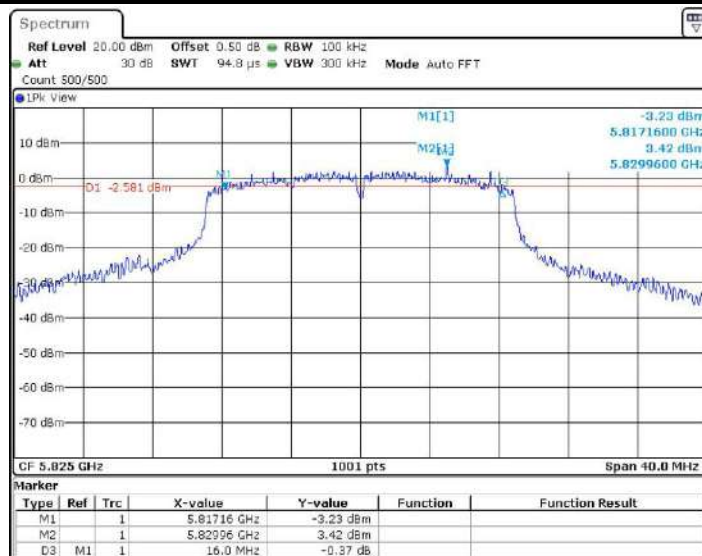


11AC20SISO_Ant1_5825

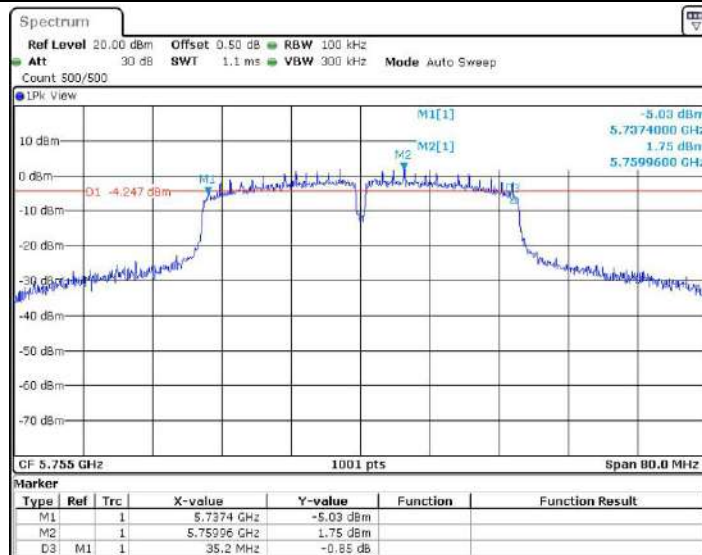

11AC40SISO_Ant1_5755

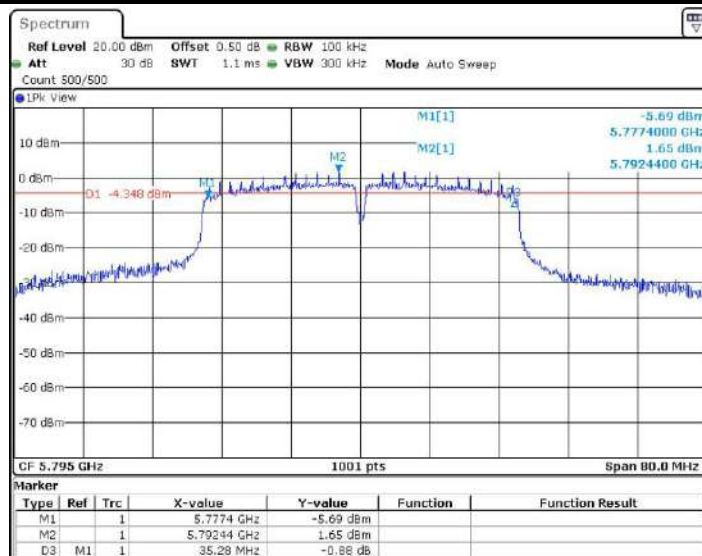

11AC40SISO_Ant1_5795

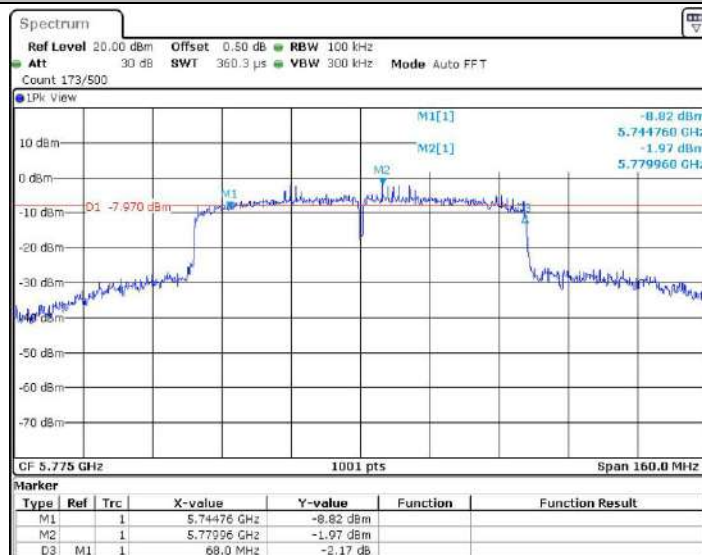

11AC80SISO_Ant1_5775

Maximum conducted output power


Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	15.16	<=22.48	PASS
		5200	14.51	<=22.48	PASS
		5240	14.20	<=22.48	PASS
		5260	15.47	<=22.48	PASS
		5280	15.53	<=22.48	PASS
		5320	15.44	<=22.48	PASS
		5500	15.79	<=22.48	PASS
		5580	15.39	<=22.48	PASS
		5700	14.47	<=22.48	PASS
		5745	15.00	<=28.5	PASS
		5785	15.09	<=28.5	PASS
		5825	14.90	<=28.5	PASS
11N20SISO	Ant1	5180	13.76	<=22.48	PASS
		5200	13.57	<=22.48	PASS
		5240	13.08	<=22.48	PASS
		5260	14.68	<=22.48	PASS
		5280	14.63	<=22.48	PASS
		5320	14.59	<=22.48	PASS
		5500	14.99	<=22.48	PASS
		5580	14.08	<=22.48	PASS
		5700	13.54	<=22.48	PASS
		5745	14.02	<=28.5	PASS
		5785	14.22	<=28.5	PASS
		5825	14.18	<=28.5	PASS
11N40SISO	Ant1	5190	13.33	<=22.48	PASS
		5230	12.71	<=22.48	PASS
		5270	14.24	<=22.48	PASS
		5310	14.30	<=22.48	PASS
		5510	15.46	<=22.48	PASS
		5550	14.50	<=22.48	PASS
		5670	13.31	<=22.48	PASS
		5755	13.54	<=28.5	PASS
		5795	13.62	<=28.5	PASS
11AC20SISO	Ant1	5180	14.62	<=22.48	PASS
		5200	14.74	<=22.48	PASS
		5240	13.63	<=22.48	PASS

		5260	15.28	<=22.48	PASS
		5280	15.05	<=22.48	PASS
		5320	15.01	<=22.48	PASS
		5500	15.65	<=22.48	PASS
		5580	14.85	<=22.48	PASS
		5700	14.02	<=22.48	PASS
		5745	14.37	<=28.5	PASS
		5785	14.52	<=28.5	PASS
		5825	15.88	<=28.5	PASS
11AC40SISO	Ant1	5190	14.21	<=22.48	PASS
		5230	13.66	<=22.48	PASS
		5270	15.03	<=22.48	PASS
		5310	14.88	<=22.48	PASS
		5510	16.34	<=22.48	PASS
		5550	15.60	<=22.48	PASS
		5670	14.40	<=22.48	PASS
		5755	14.22	<=28.5	PASS
		5795	14.78	<=28.5	PASS
11AC80SISO	Ant1	5210	13.78	<=22.48	PASS
		5290	14.69	<=22.48	PASS
		5530	15.72	<=22.48	PASS
		5610	15.23	<=22.48	PASS
		5775	14.20	<=28.5	PASS


Note: The Duty Cycle Factor is compensated in the graph.

Test Graphs

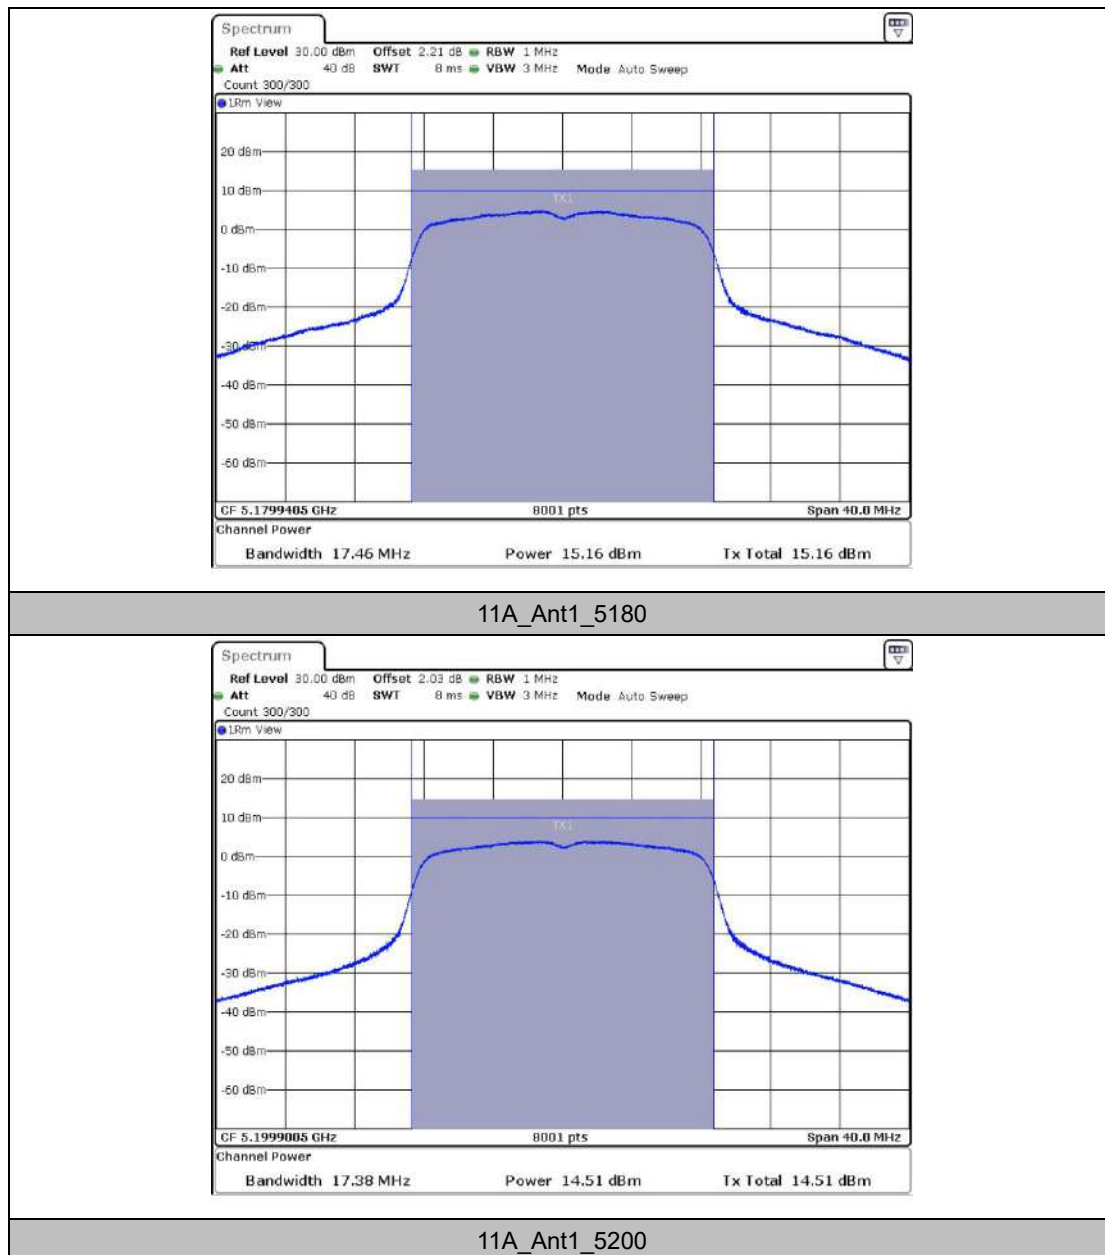


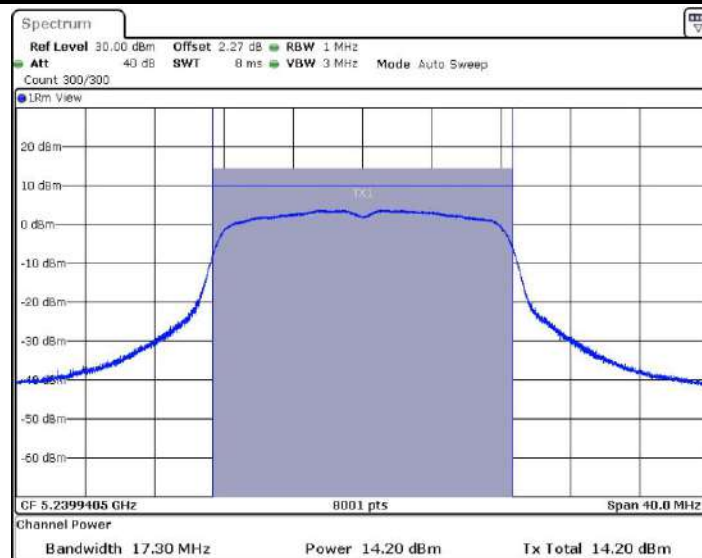


11A_Ant1_5240

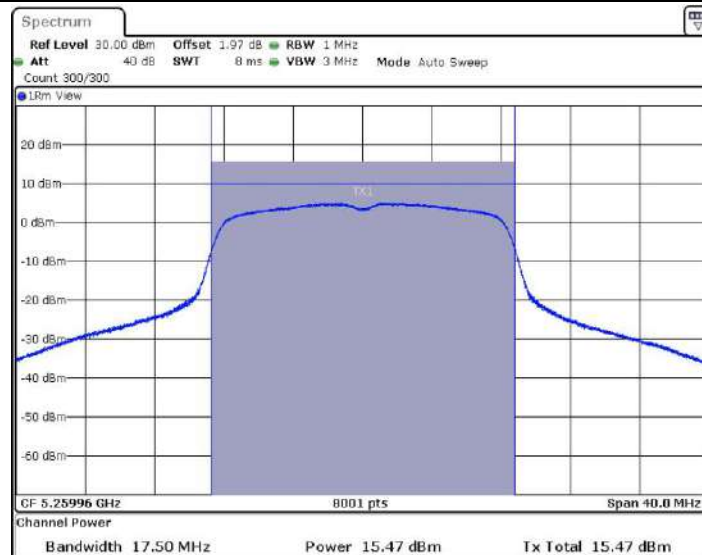


11A_Ant1_5260

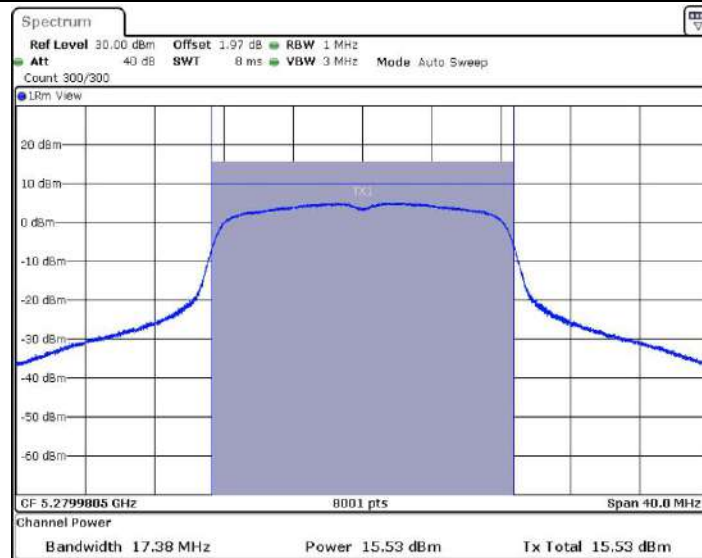


11A_Ant1_5280

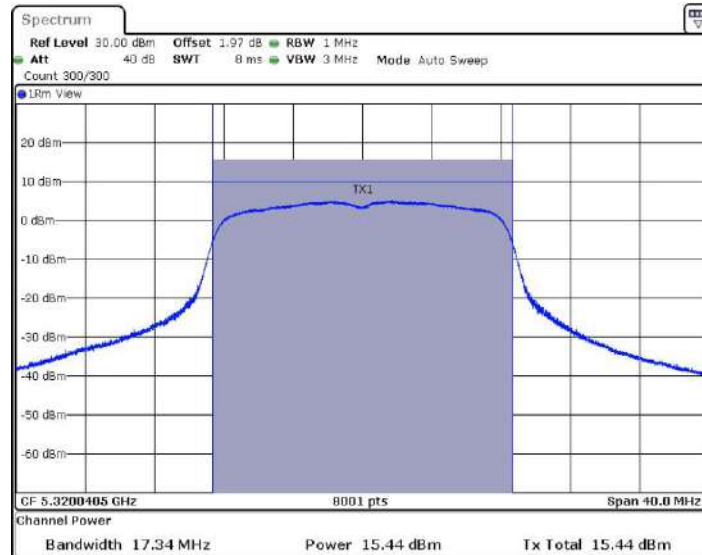


11A_Ant1_5320

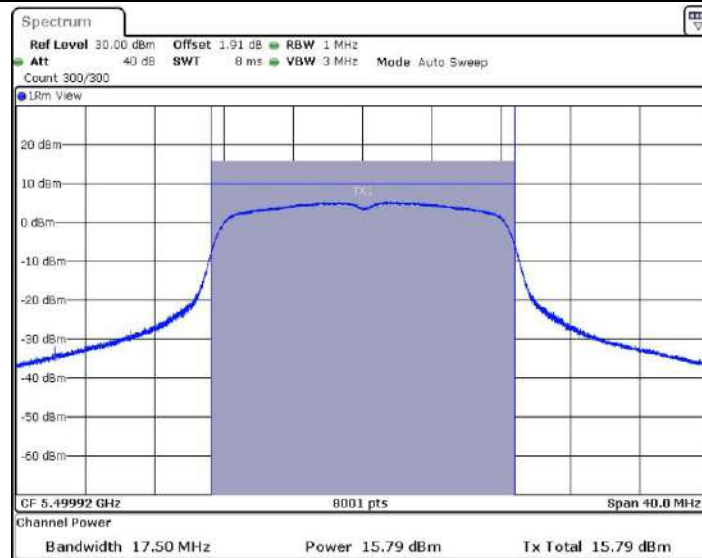


11A_Ant1_5500

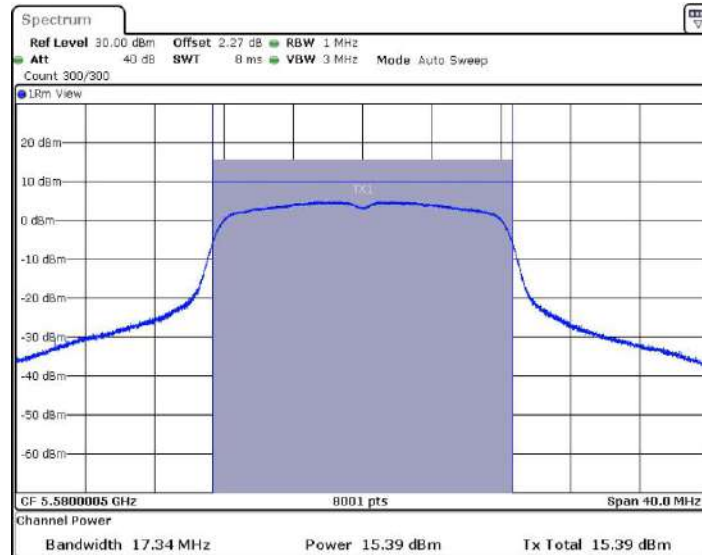


11A_Ant1_5580

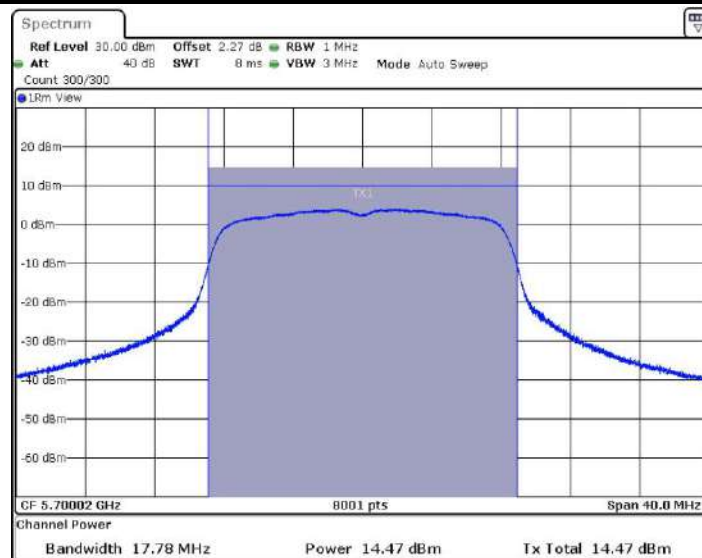


11A_Ant1_5700

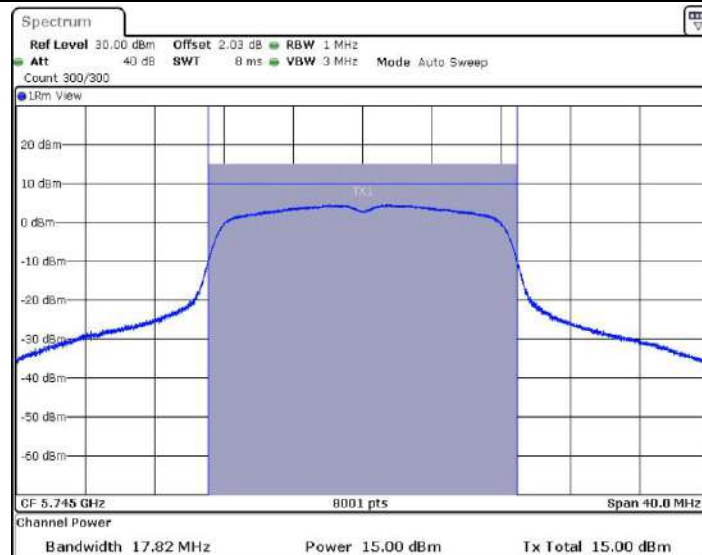


11A_Ant1_5745

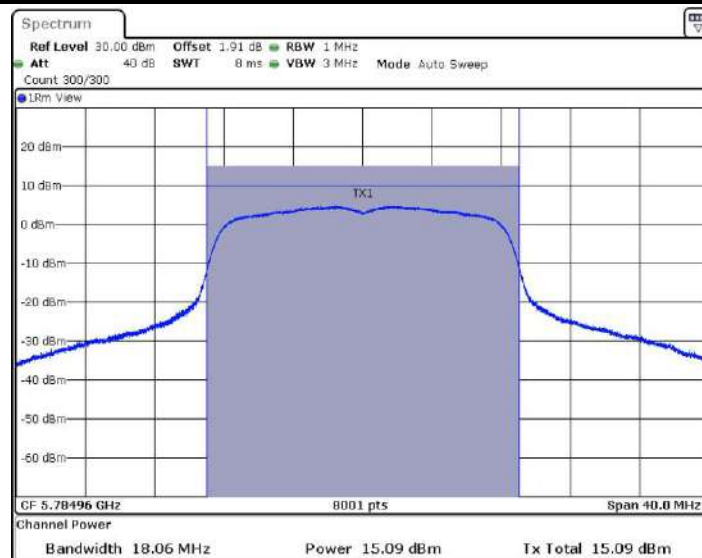


11A_Ant1_5785

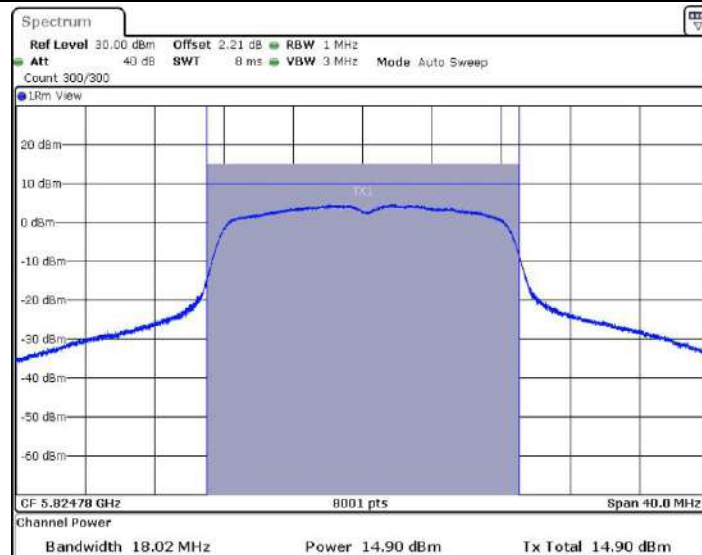


11A_Ant1_5825

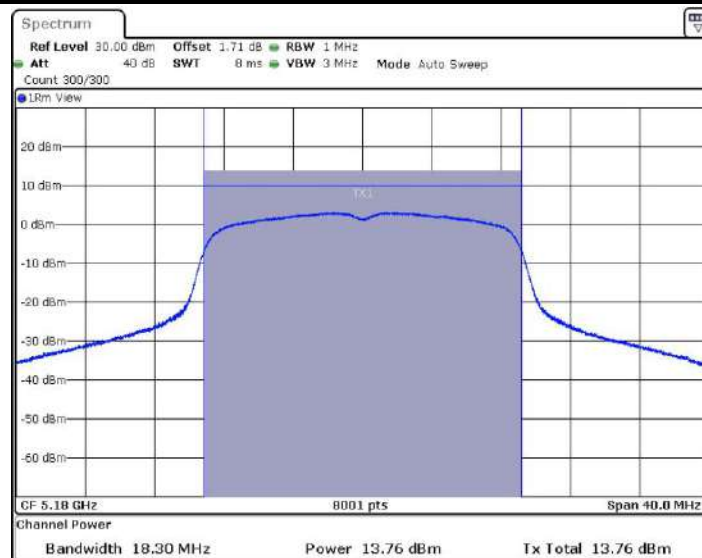


11N20SISO_Ant1_5180

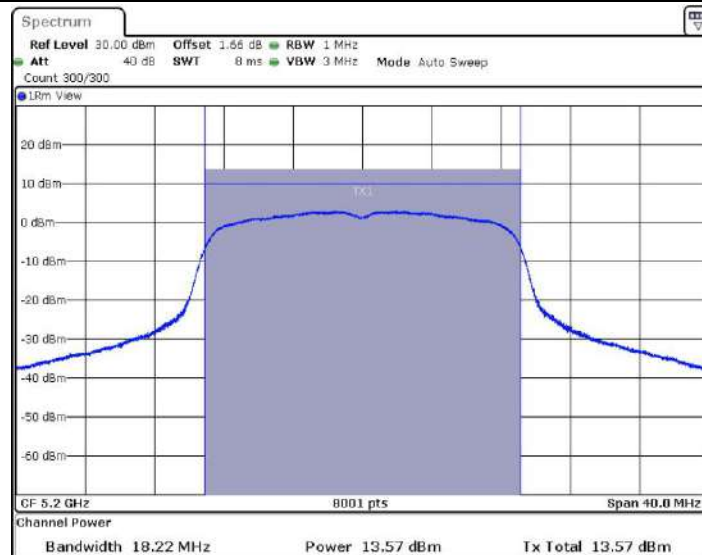


11N20SISO_Ant1_5200

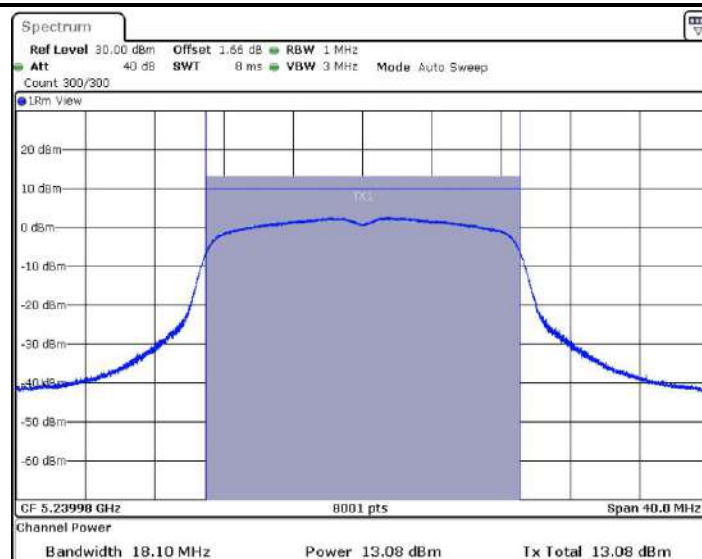


11N20SISO_Ant1_5240

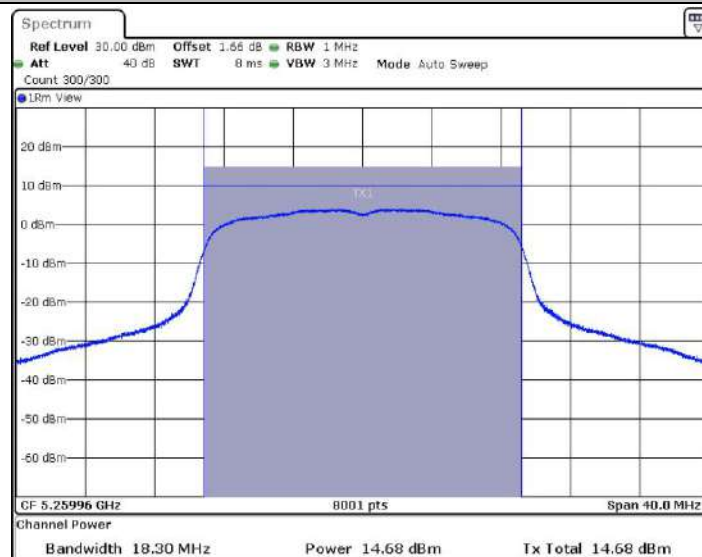


11N20SISO_Ant1_5260

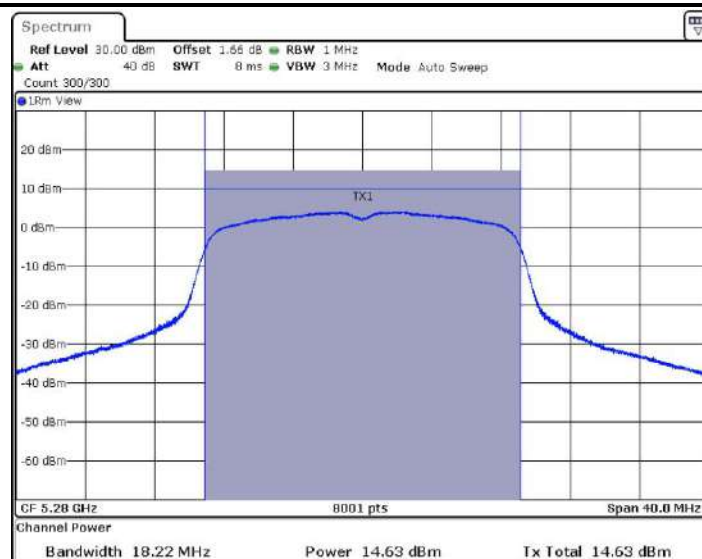


11N20SISO_Ant1_5280

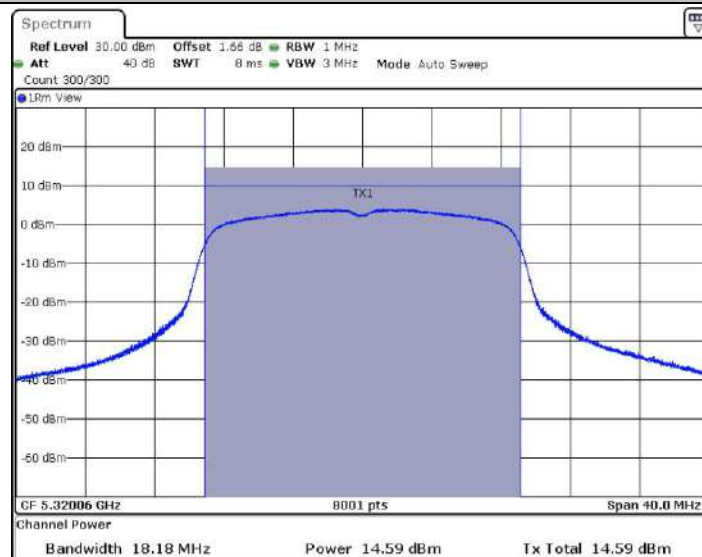


11N20SISO_Ant1_5320

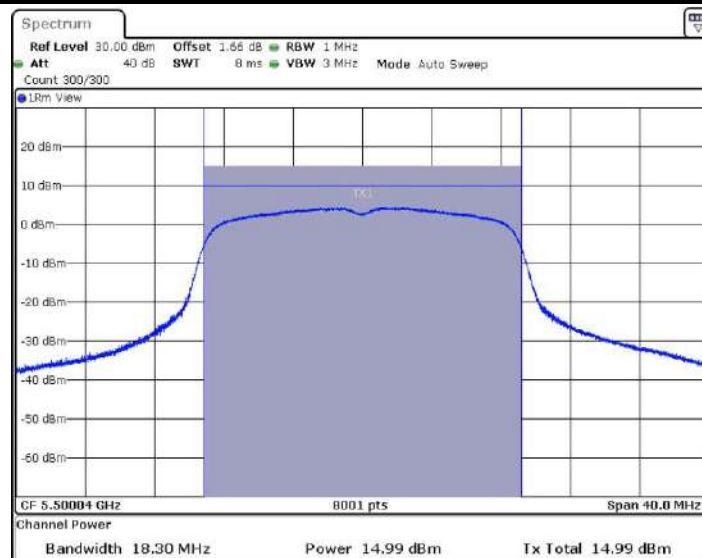


11N20SISO_Ant1_5500

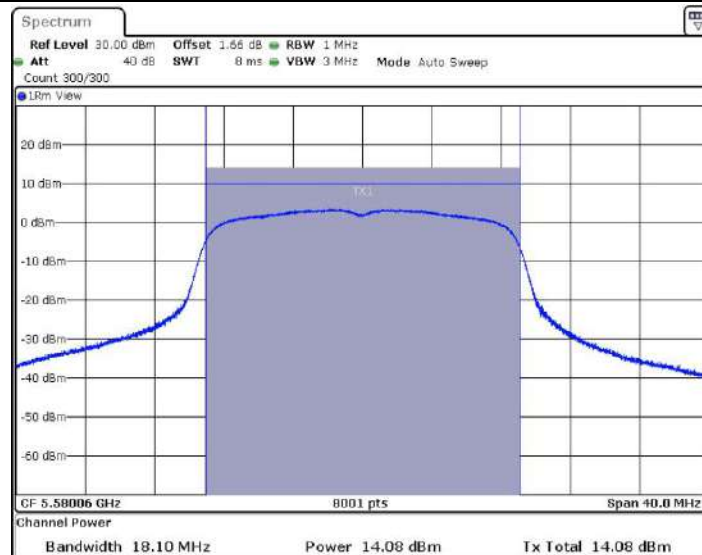


11N20SISO_Ant1_5580

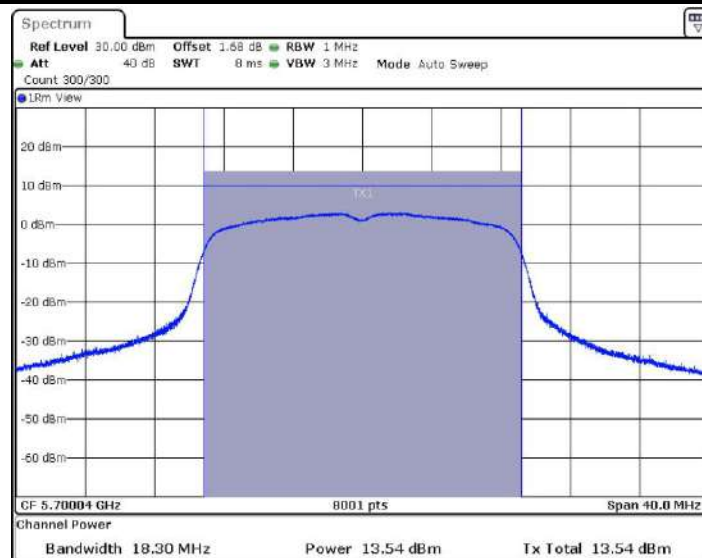


11N20SISO_Ant1_5700

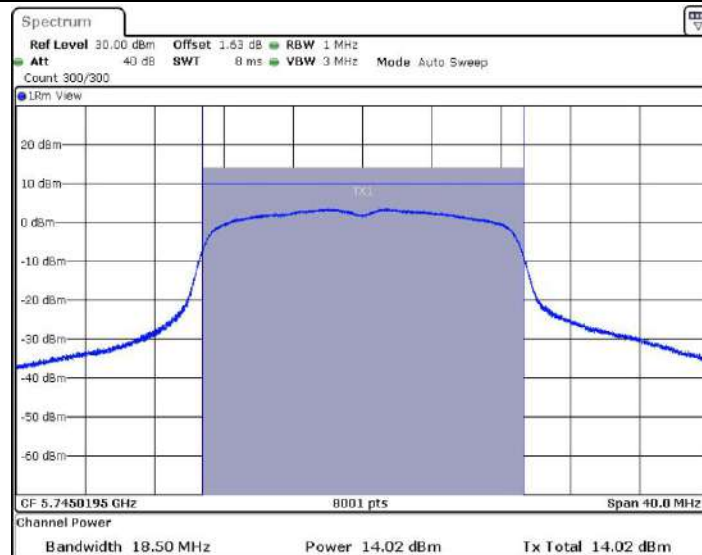


11N20SISO_Ant1_5745

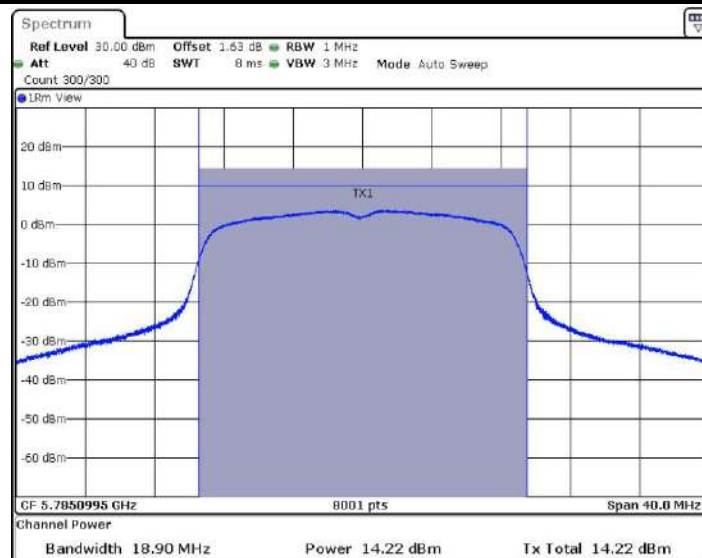


11N20SISO_Ant1_5785

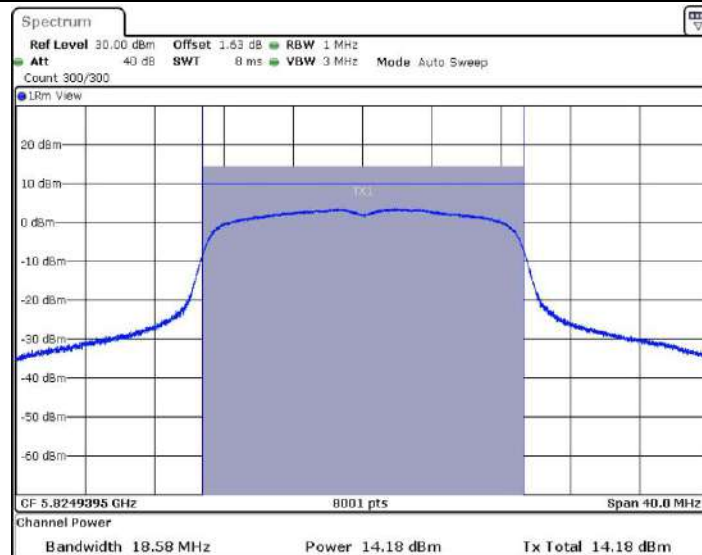


11N20SISO_Ant1_5825

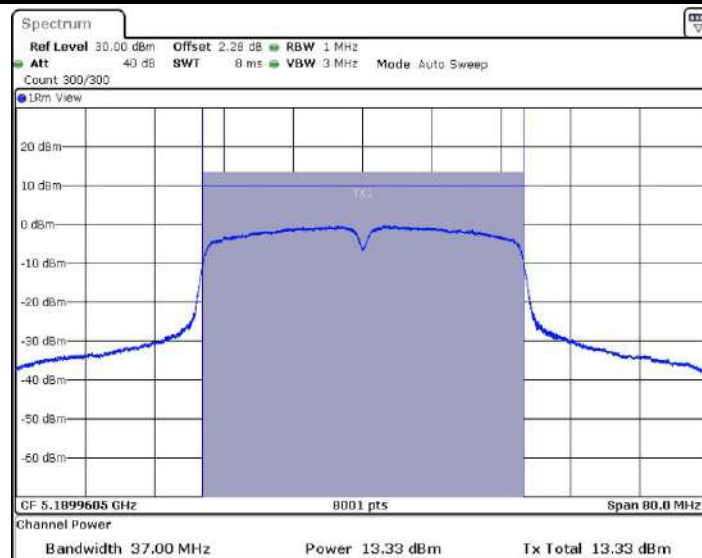


11N40SISO_Ant1_5190

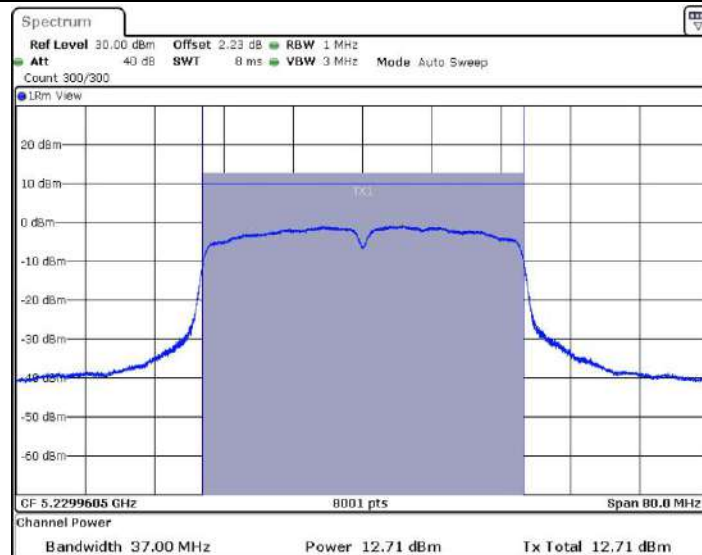


11N40SISO_Ant1_5230

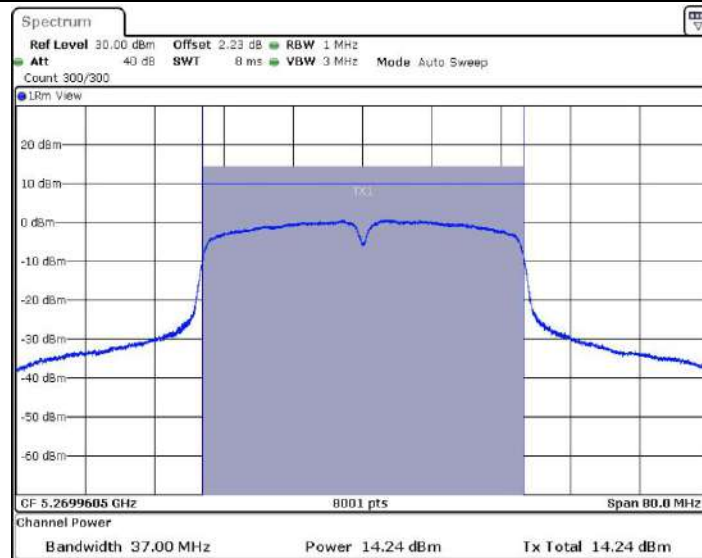


11N40SISO_Ant1_5270

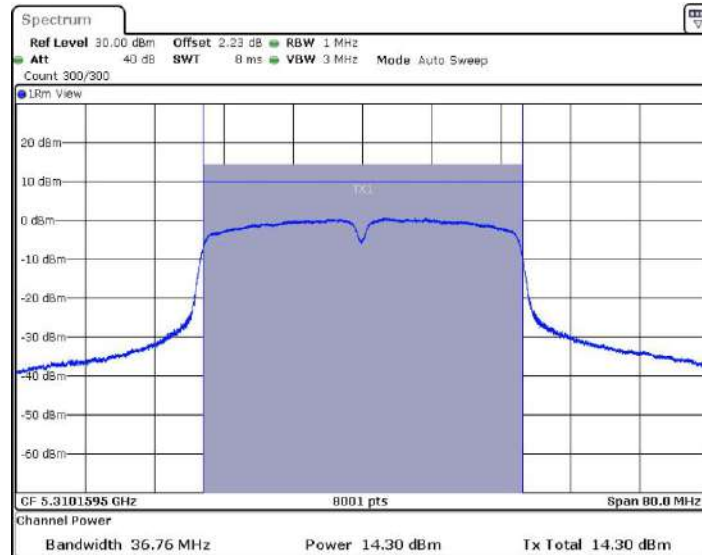


11N40SISO_Ant1_5310

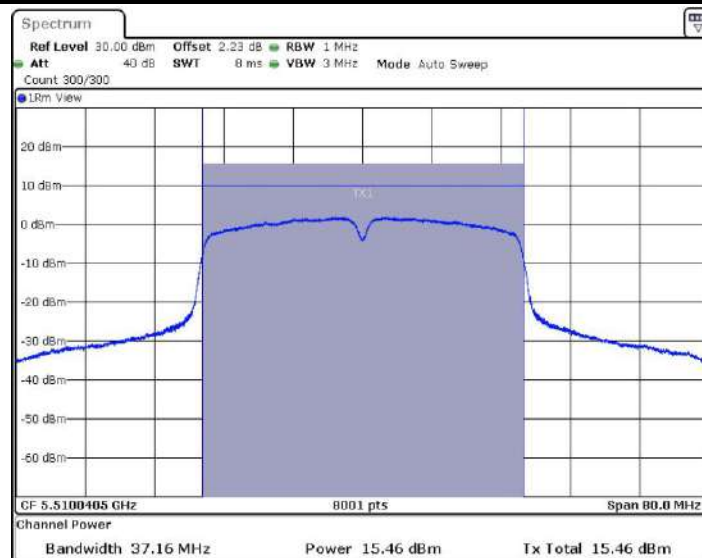


11N40SISO_Ant1_5510

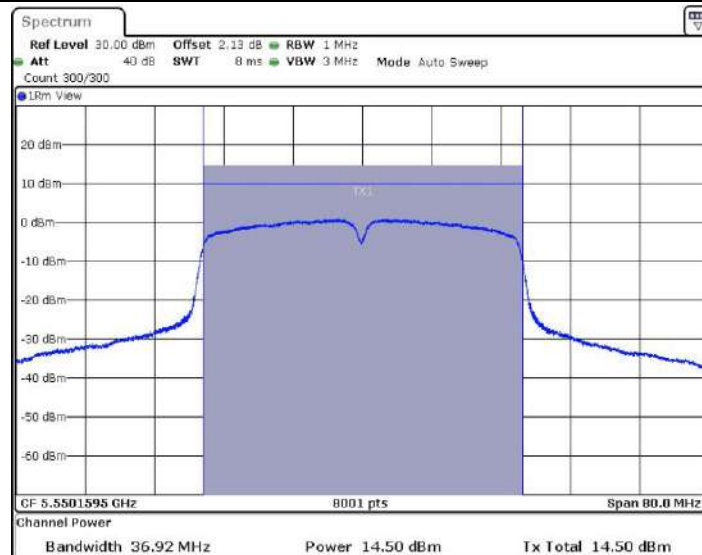


11N40SISO_Ant1_5550

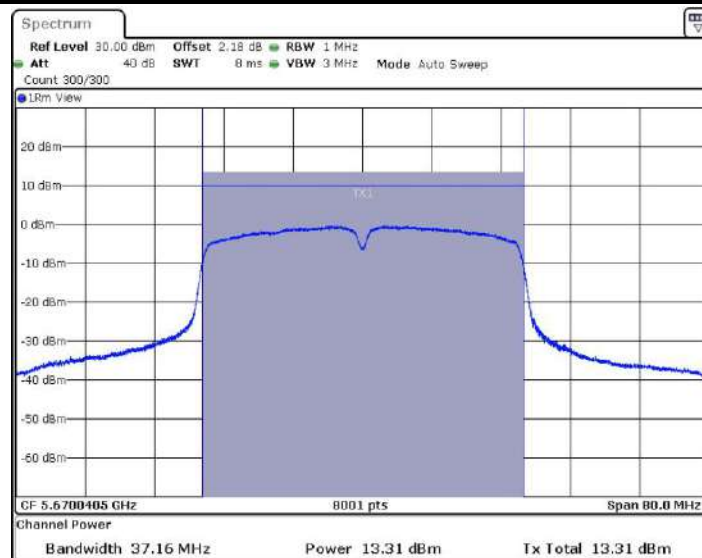


11N40SISO_Ant1_5670

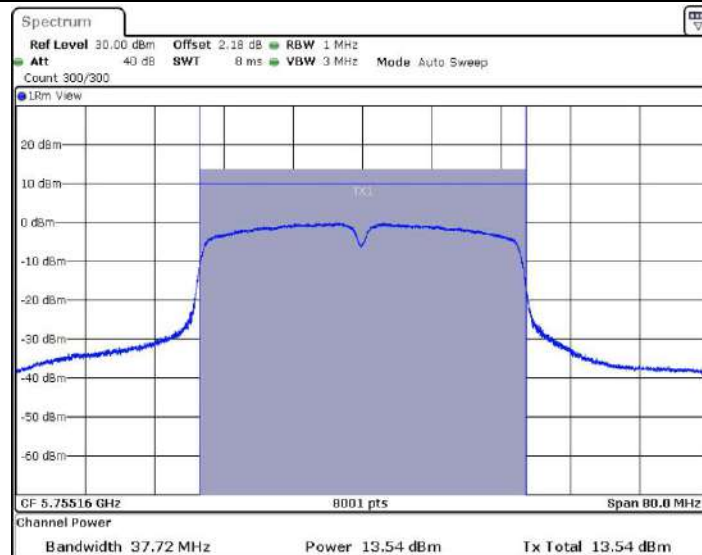


11N40SISO_Ant1_5755

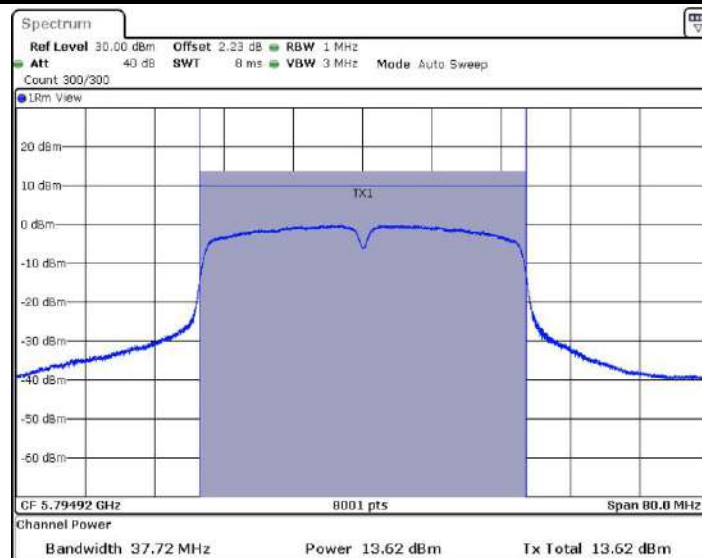


11N40SISO_Ant1_5795

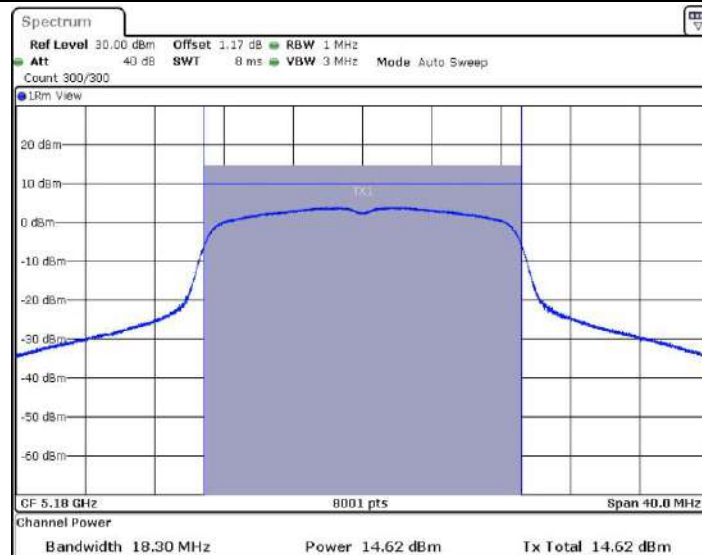


11AC20SISO_Ant1_5180

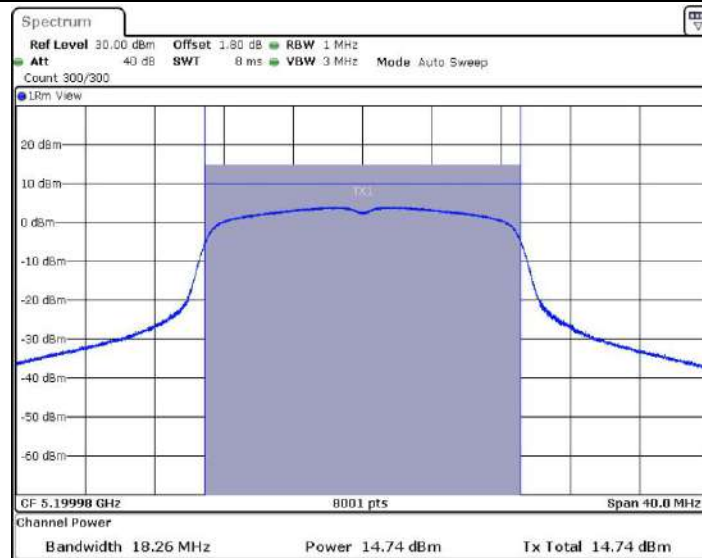


11AC20SISO_Ant1_5200

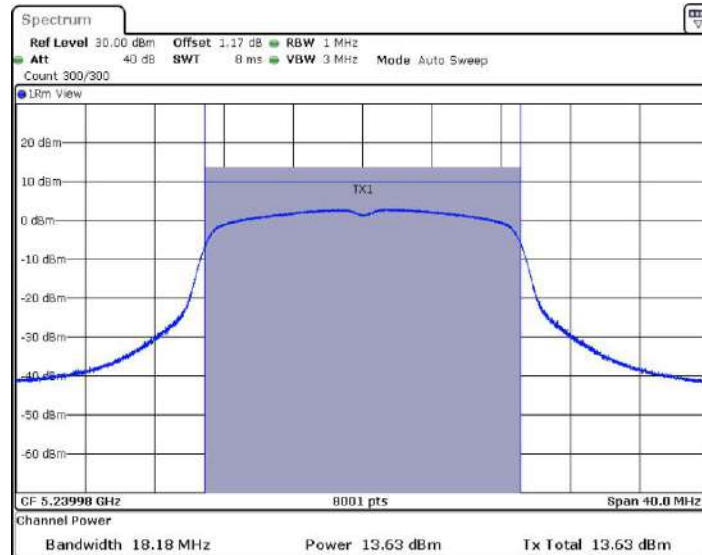


11AC20SISO_Ant1_5240

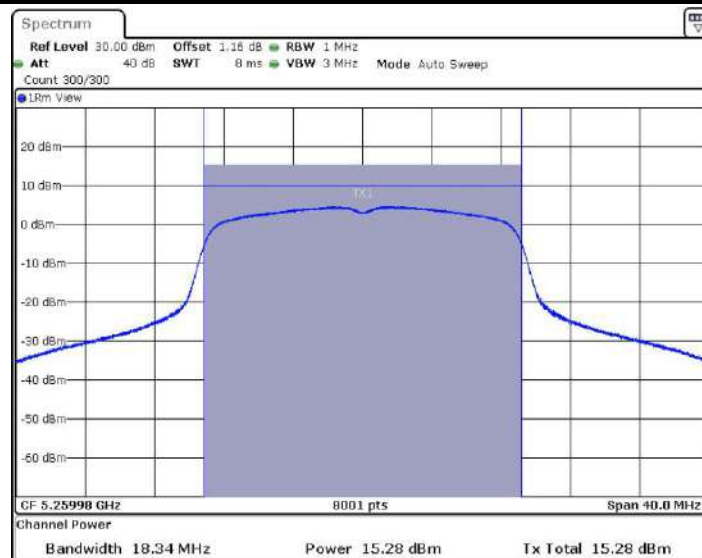


11AC20SISO_Ant1_5260

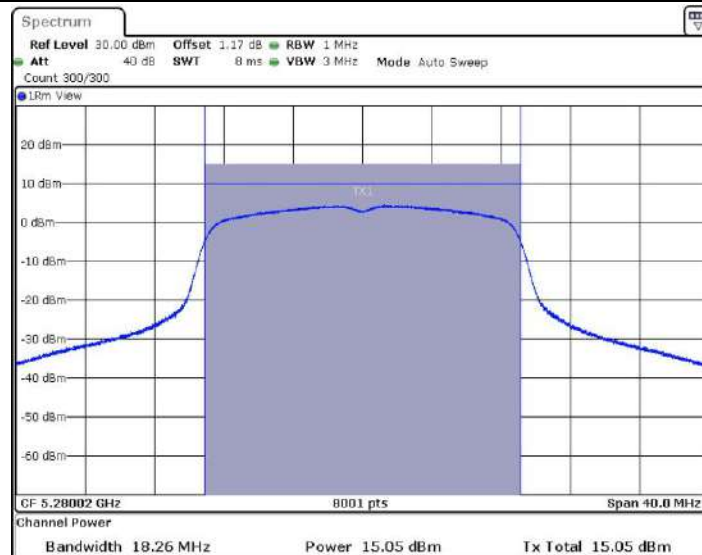


11AC20SISO_Ant1_5280

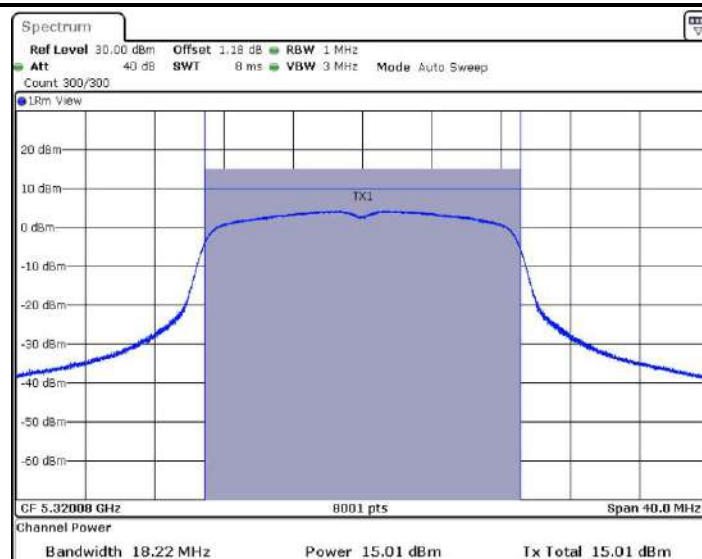


11AC20SISO_Ant1_5320

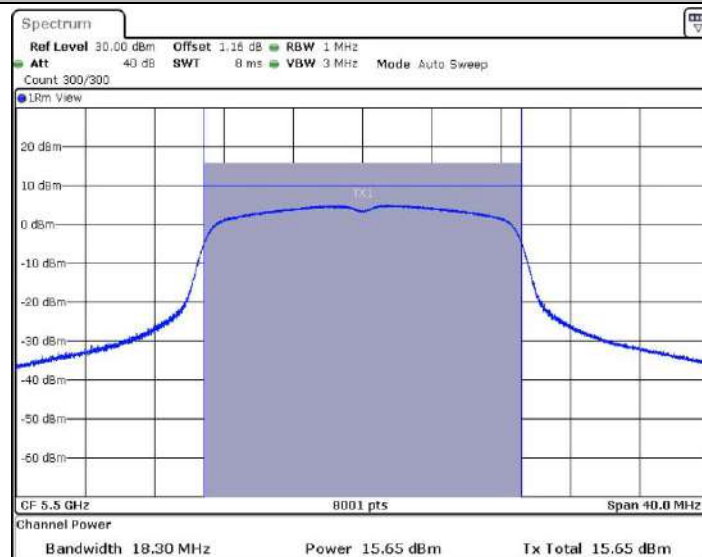


11AC20SISO_Ant1_5500

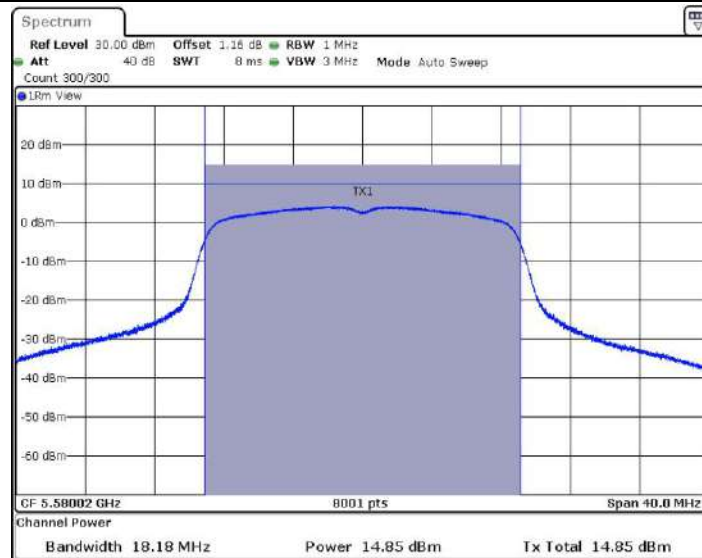


11AC20SISO_Ant1_5580

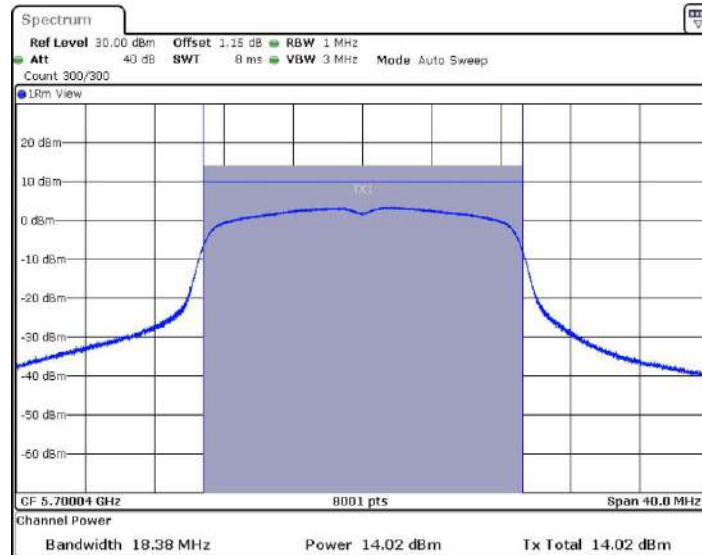


11AC20SISO_Ant1_5700

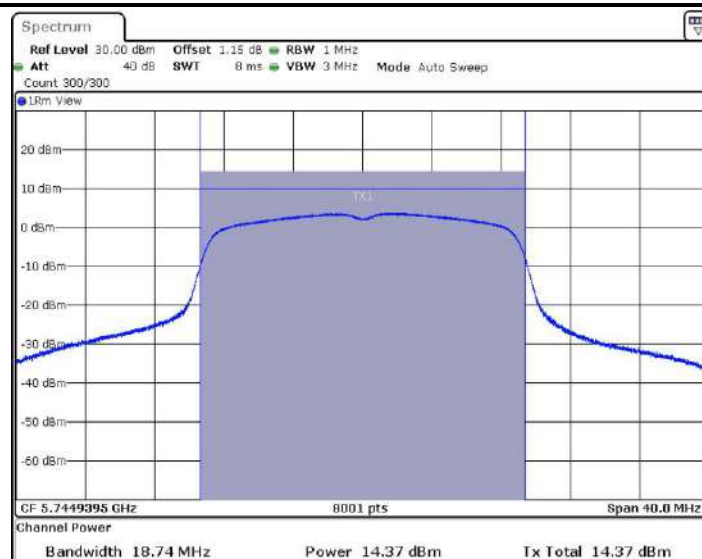


11AC20SISO_Ant1_5745

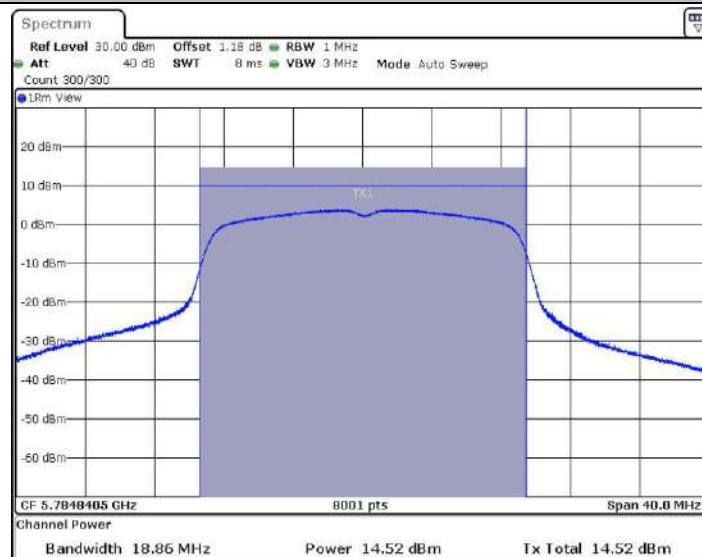


11AC20SISO_Ant1_5785

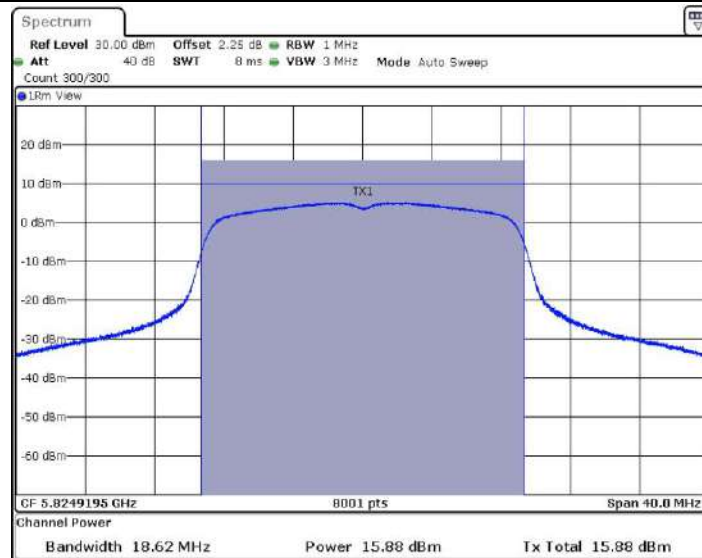


11AC20SISO_Ant1_5825

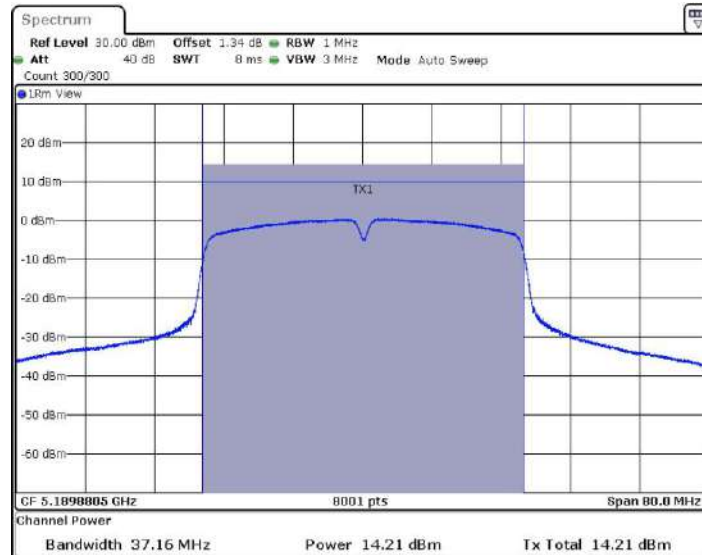


11AC40SISO_Ant1_5190

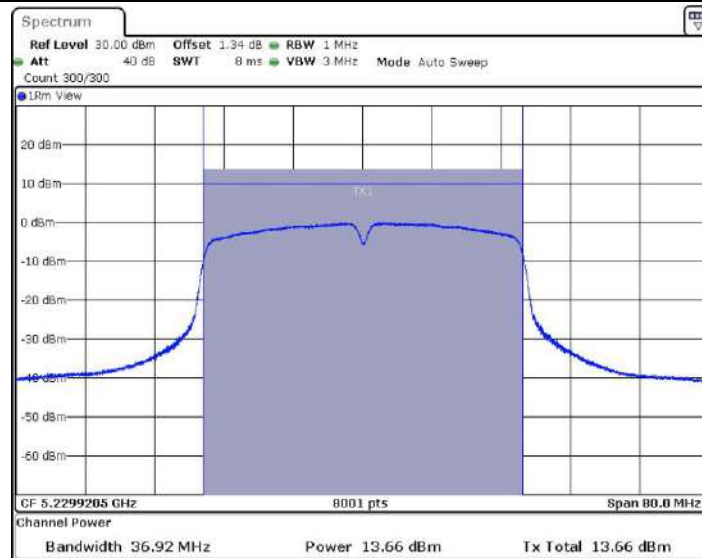


11AC40SISO_Ant1_5230

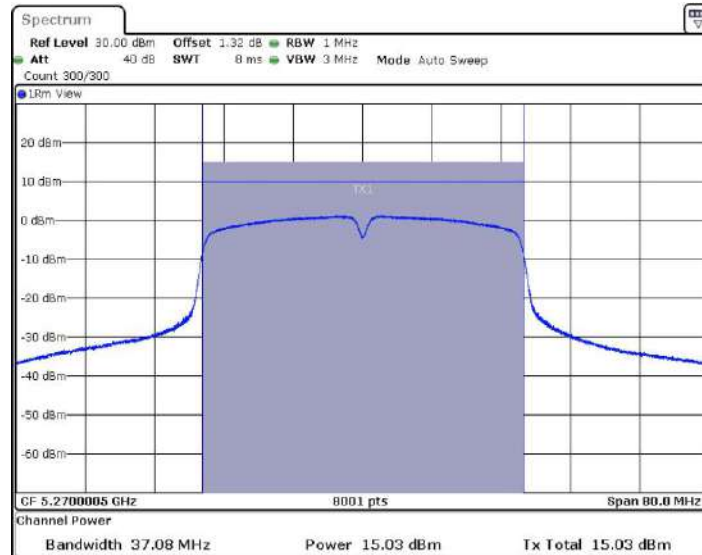


11AC40SISO_Ant1_5270

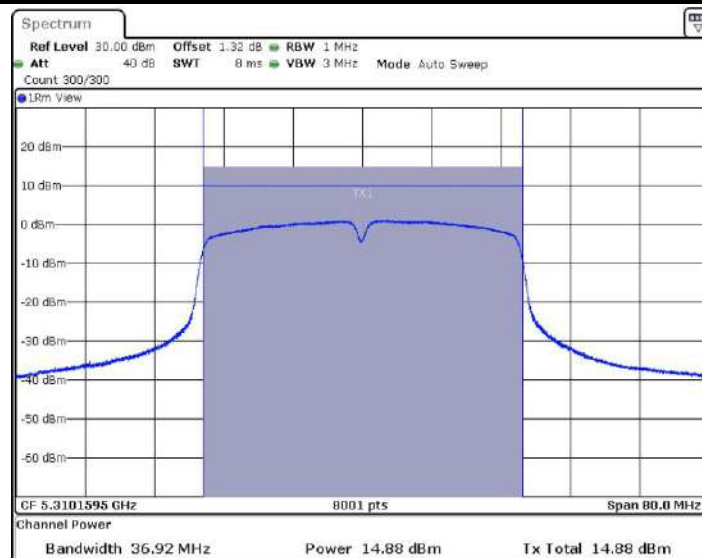


11AC40SISO_Ant1_5310

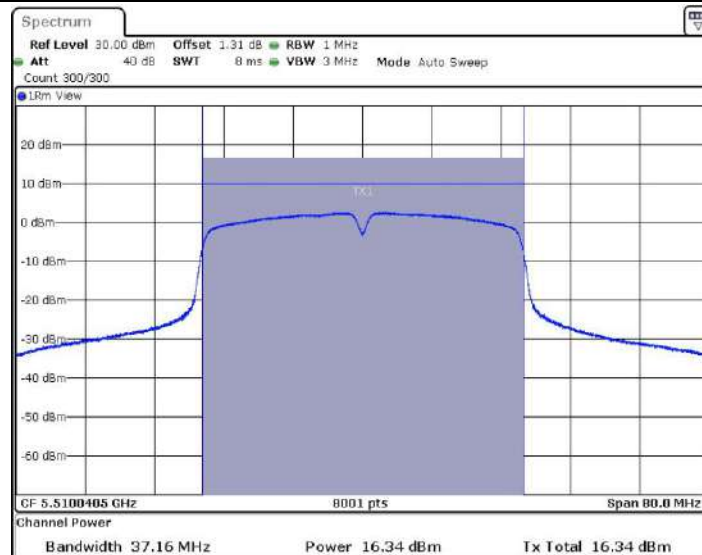


11AC40SISO_Ant1_5510

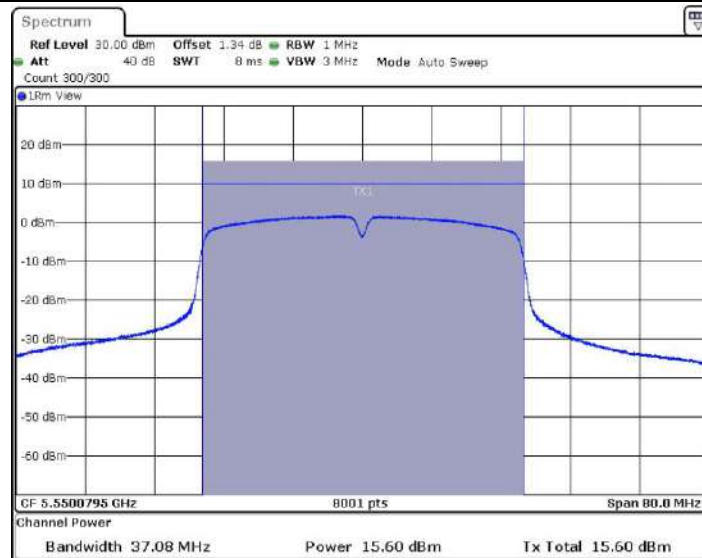


11AC40SISO_Ant1_5550

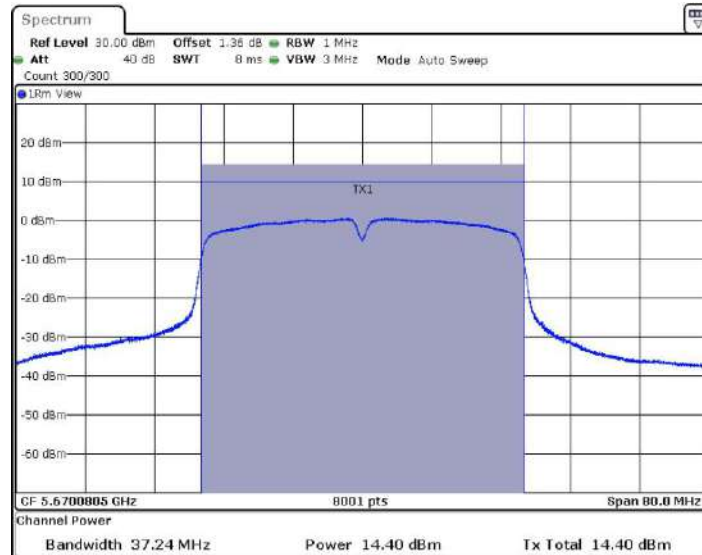


11AC40SISO_Ant1_5670

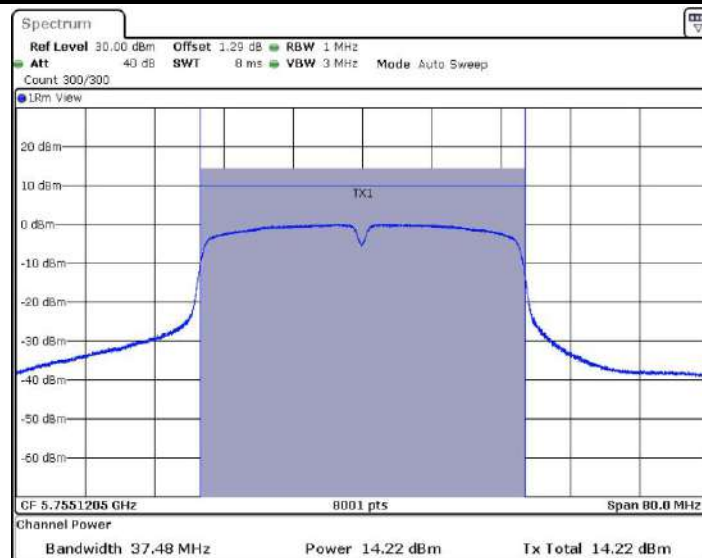


11AC40SISO_Ant1_5755

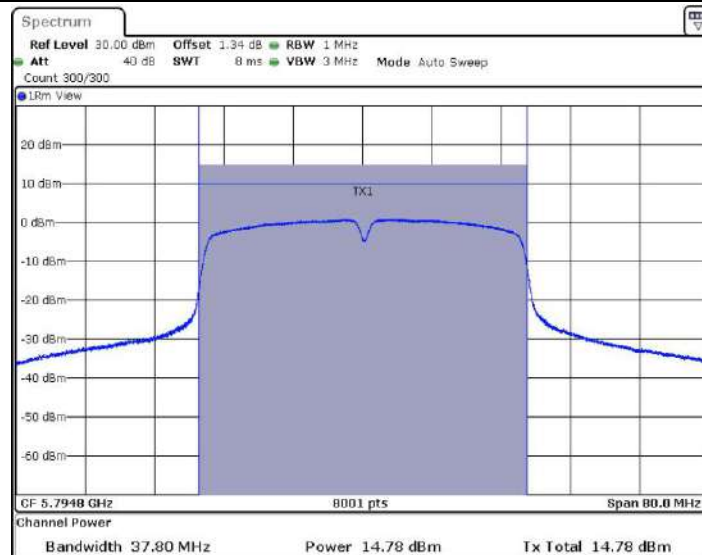


11AC40SISO_Ant1_5795

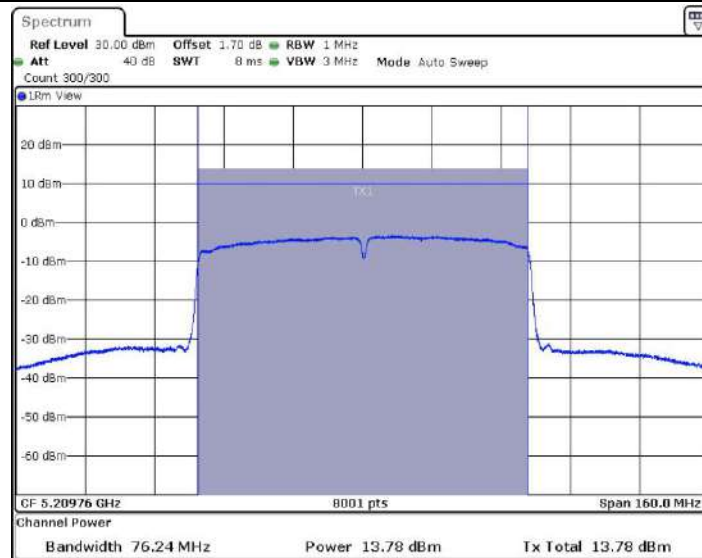


11AC80SISO_Ant1_5210

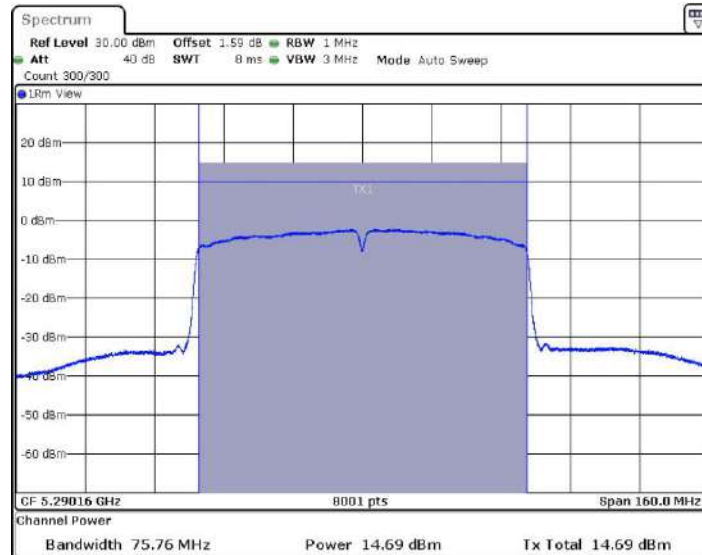


11AC80SISO_Ant1_5290

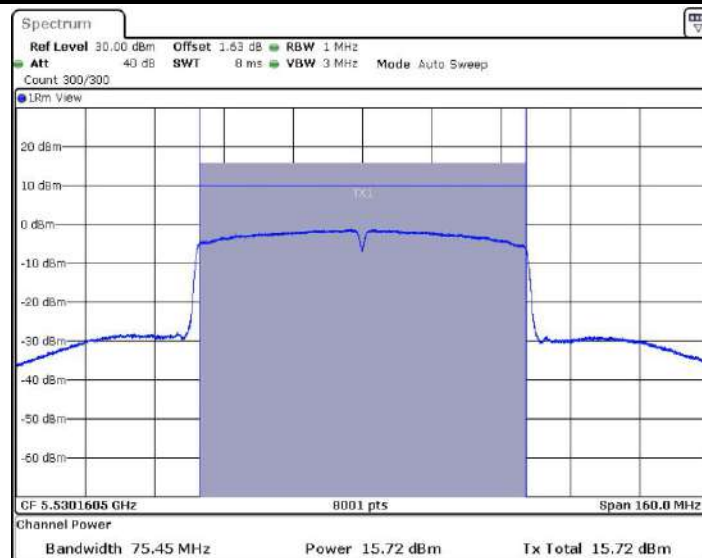

11AC80SISO_Ant1_5530

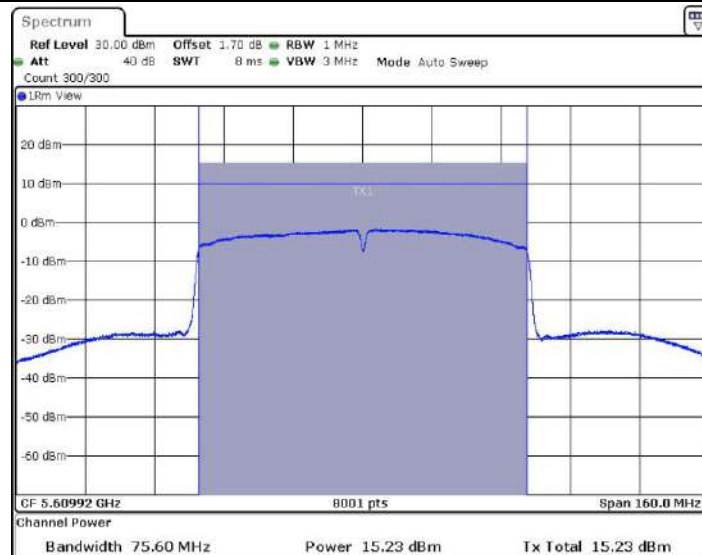

11AC80SISO_Ant1_5610

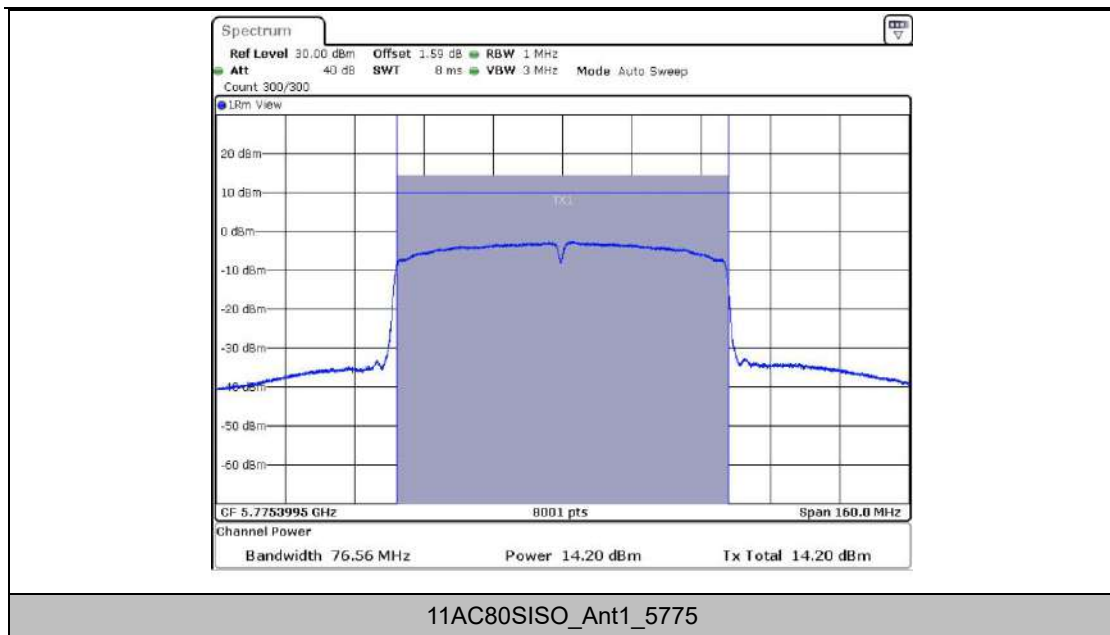

Maximum power spectral density


Test Result

TestMode	Antenna	Channel	5150-5725MHz: Result[dBm/MHz] 5725~5850MHz: Result[dBm/500KHz]	5150-5725MHz: Limit[dBm/MHz] 5725~5850MHz: Limit[dBm/500KHz]	Verdict
11A	Ant1	5180	4.52	<=9.5	PASS
		5200	4.01	<=9.5	PASS
		5240	3.74	<=9.5	PASS
		5260	4.78	<=9.5	PASS
		5280	4.83	<=9.5	PASS
		5320	5.11	<=9.5	PASS
		5500	5.41	<=9.5	PASS
		5580	4.88	<=9.5	PASS
		5700	3.91	<=9.5	PASS
		5745	1.68	<=28.5	PASS
		5785	1.66	<=28.5	PASS
		5825	2.18	<=28.5	PASS
11N20SISO	Ant1	5180	3.24	<=9.5	PASS
		5200	3.04	<=9.5	PASS
		5240	2.31	<=9.5	PASS
		5260	3.87	<=9.5	PASS
		5280	4.01	<=9.5	PASS
		5320	3.94	<=9.5	PASS
		5500	4.24	<=9.5	PASS
		5580	3.52	<=9.5	PASS
		5700	2.79	<=9.5	PASS
		5745	0.47	<=28.5	PASS
		5785	0.73	<=28.5	PASS
		5825	0.83	<=28.5	PASS
11N40SISO	Ant1	5190	-0.19	<=9.5	PASS
		5230	-0.95	<=9.5	PASS
		5270	0.49	<=9.5	PASS
		5310	0.46	<=9.5	PASS
		5510	2.06	<=9.5	PASS
		5550	0.9	<=9.5	PASS
		5670	-0.52	<=9.5	PASS
		5755	-3.11	<=28.5	PASS
11AC20SISO	Ant1	5795	-3.11	<=28.5	PASS
		5180	3.68	<=9.5	PASS

		5200	3.91	<=9.5	PASS
		5240	2.87	<=9.5	PASS
		5260	4.51	<=9.5	PASS
		5280	4.25	<=9.5	PASS
		5320	4.27	<=9.5	PASS
		5500	5.11	<=9.5	PASS
		5580	4	<=9.5	PASS
		5700	3.25	<=9.5	PASS
		5745	0.59	<=28.5	PASS
		5785	0.87	<=28.5	PASS
		5825	2.41	<=28.5	PASS
11AC40SISO	Ant1	5190	0.31	<=9.5	PASS
		5230	-0.11	<=9.5	PASS
		5270	1.05	<=9.5	PASS
		5310	1.22	<=9.5	PASS
		5510	2.56	<=9.5	PASS
		5550	1.69	<=9.5	PASS
		5670	0.47	<=9.5	PASS
		5755	-2.76	<=28.5	PASS
		5795	-2.19	<=28.5	PASS
11AC80SISO	Ant1	5210	-3.54	<=9.5	PASS
		5290	-2.51	<=9.5	PASS
		5530	-1.33	<=9.5	PASS
		5610	-1.72	<=9.5	PASS
		5775	-5.96	<=28.5	PASS

Note: The Duty Cycle Factor is compensated in the graph.

Test Graphs

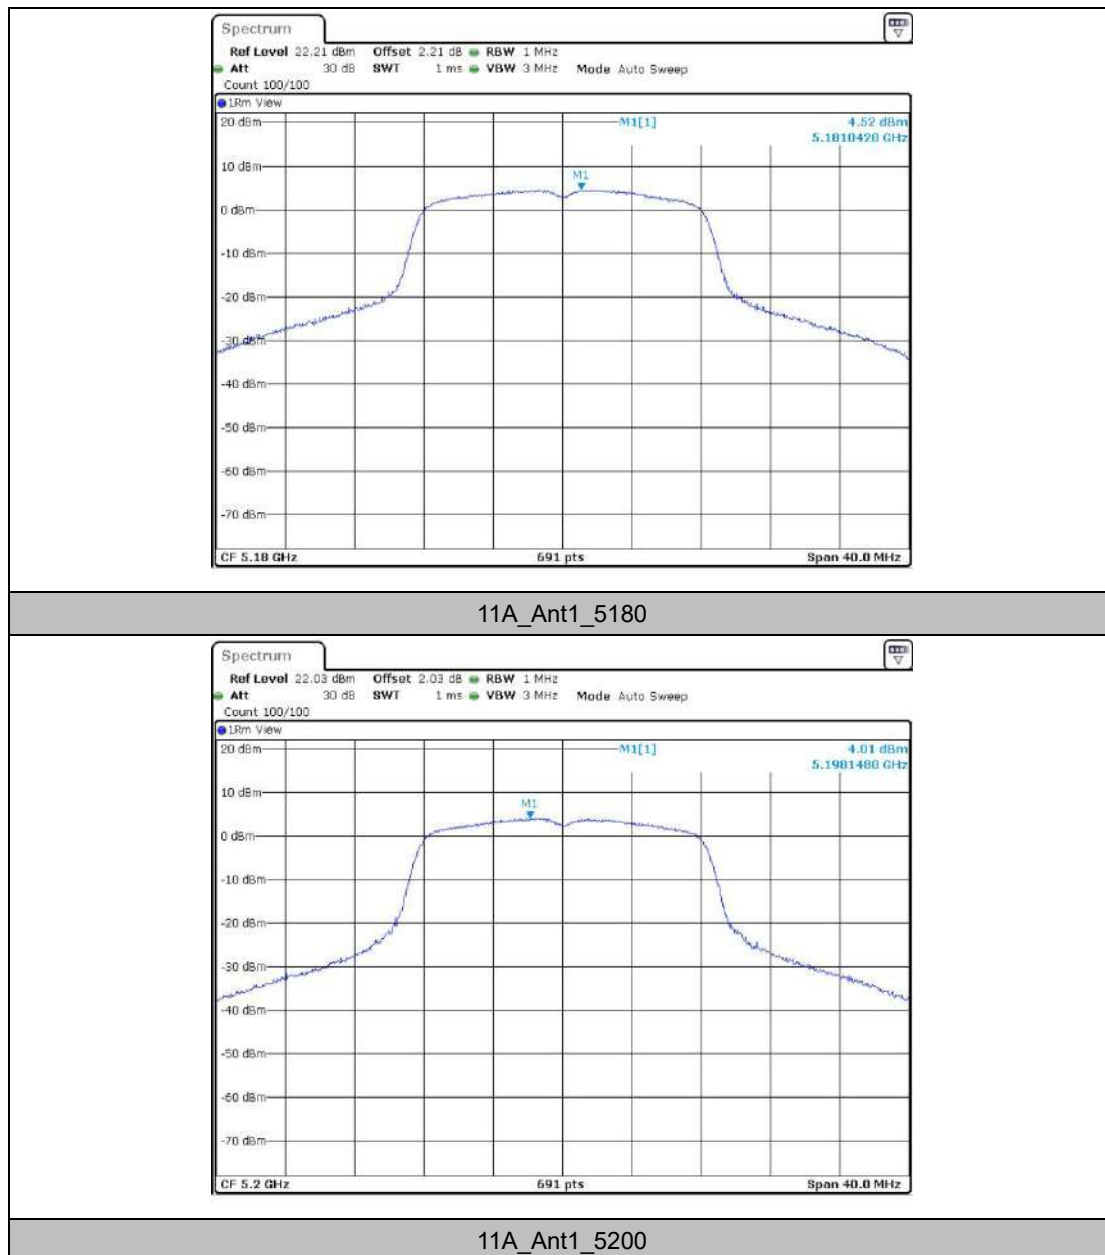



11A_Ant1_5240



11A_Ant1_5260



11A_Ant1_5280



11A_Ant1_5320



11A_Ant1_5500



11A_Ant1_5580



11A_Ant1_5700



11A_Ant1_5745



11A_Ant1_5785



11A_Ant1_5825



11N20SISO_Ant1_5180



11N20SISO_Ant1_5200



11N20SISO_Ant1_5240



11N20SISO_Ant1_5260



11N20SISO_Ant1_5280



11N20SISO_Ant1_5320



11N20SISO_Ant1_5500



11N20SISO_Ant1_5580



11N20SISO_Ant1_5700



11N20SISO_Ant1_5745



11N20SISO_Ant1_5785



11N20SISO_Ant1_5825



11N40SISO_Ant1_5190



11N40SISO_Ant1_5230



11N40SISO_Ant1_5270



11N40SISO_Ant1_5310



11N40SISO_Ant1_5510



11N40SISO_Ant1_5550



11N40SISO_Ant1_5670



11N40SISO_Ant1_5755



11N40SISO_Ant1_5795



11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200



11AC20SISO_Ant1_5240



11AC20SISO_Ant1_5260




11AC20SISO_Ant1_5280



11AC20SISO_Ant1_5320



11AC20SISO_Ant1_5500

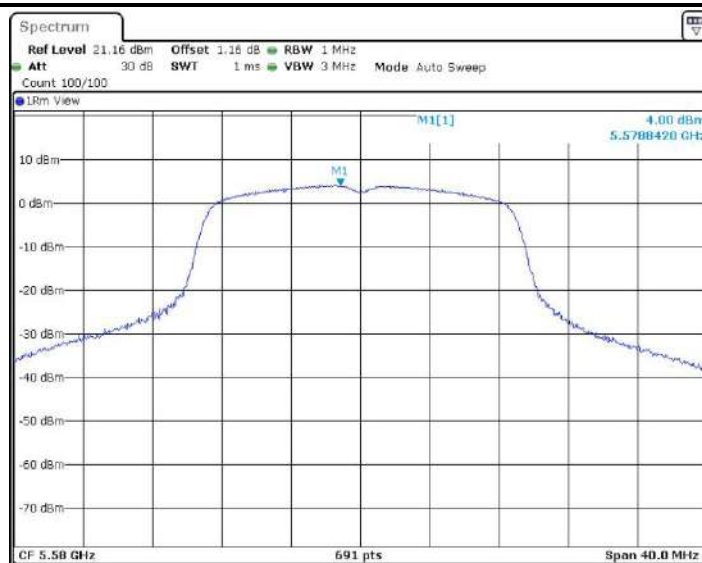

11AC20SISO_Ant1_5580




11AC20SISO_Ant1_5700



11AC20SISO_Ant1_5745



11AC20SISO_Ant1_5785

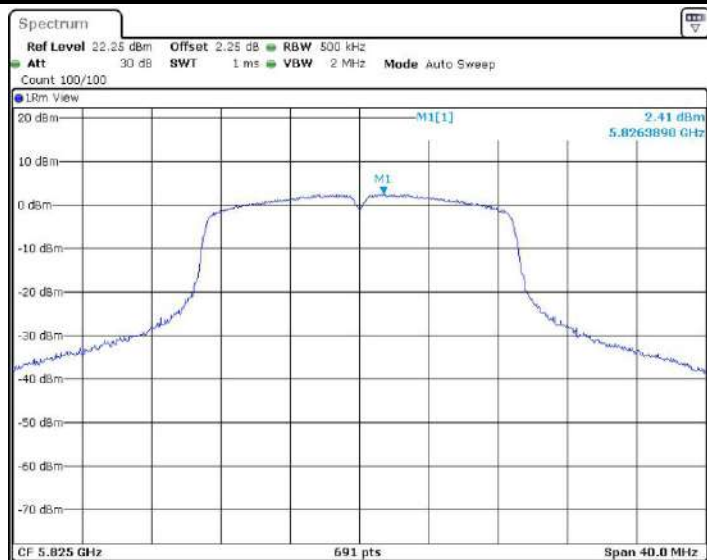

11AC20SISO_Ant1_5825



11AC40SISO_Ant1_5190



11AC40SISO_Ant1_5230




11AC40SISO_Ant1_5270



11AC40SISO_Ant1_5310



11AC40SISO_Ant1_5510

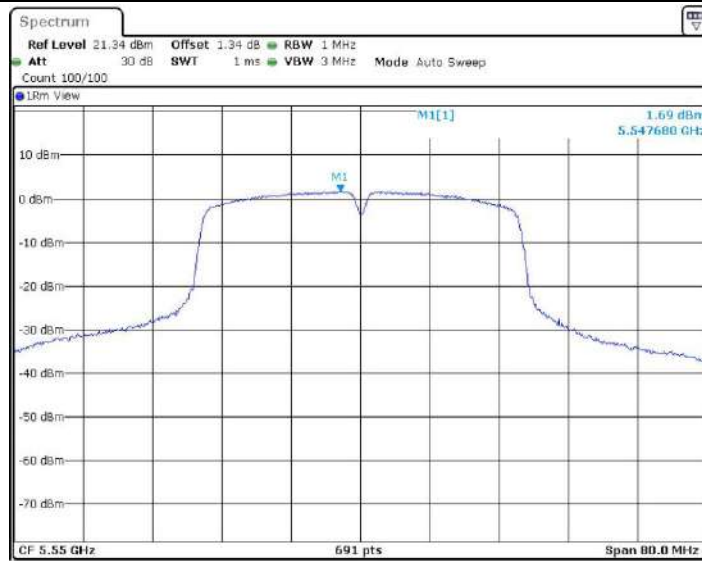

11AC40SISO_Ant1_5550



11AC40SISO_Ant1_5670



11AC40SISO_Ant1_5755



11AC40SISO_Ant1_5795



11AC80SISO_Ant1_5210



11AC80SISO_Ant1_5290



11AC80SISO_Ant1_5530



11AC80SISO_Ant1_5610



Frequency Stability

Test Result

Voltage								
TestMod e	Antenn a	Channe l	Voltage [Vdc]	Temper ature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	NT	-30000	-5.791506	20	PASS
			LV	NT	-15000	-2.895753	20	PASS
			HV	NT	-15000	-2.895753	20	PASS
		5200	NV	NT	-15000	-2.884615	20	PASS
			LV	NT	-15000	-2.884615	20	PASS
			HV	NT	-30000	-5.769231	20	PASS
		5240	NV	NT	-30000	-5.725191	20	PASS
			LV	NT	-15000	-2.862595	20	PASS
			HV	NT	-30000	-5.725191	20	PASS
		5260	NV	NT	-30000	-5.703422	20	PASS
			LV	NT	-30000	-5.703422	20	PASS
			HV	NT	-30000	-5.703422	20	PASS
		5280	NV	NT	-30000	-5.681818	20	PASS
			LV	NT	-30000	-5.681818	20	PASS
			HV	NT	-30000	-5.681818	20	PASS
		5320	NV	NT	-30000	-5.639098	20	PASS
			LV	NT	-15000	-2.819549	20	PASS
			HV	NT	-30000	-5.639098	20	PASS
		5500	NV	NT	-15000	-2.727273	20	PASS
			LV	NT	-30000	-5.454545	20	PASS
			HV	NT	-15000	-2.727273	20	PASS
		5580	NV	NT	-30000	-5.376344	20	PASS
			LV	NT	-15000	-2.688172	20	PASS
			HV	NT	-15000	-2.688172	20	PASS
		5700	NV	NT	-30000	-5.263158	20	PASS
			LV	NT	-30000	-5.263158	20	PASS
			HV	NT	-30000	-5.263158	20	PASS
		5745	NV	NT	-15000	-2.610966	20	PASS
			LV	NT	-15000	-2.610966	20	PASS
			HV	NT	-15000	-2.610966	20	PASS
		5785	NV	NT	-15000	-2.592913	20	PASS
			LV	NT	-30000	-5.185825	20	PASS
			HV	NT	-30000	-5.185825	20	PASS
		5825	NV	NT	-15000	-2.575107	20	PASS