802.11ac vht80, 5775MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3_middle channel 5775MHz

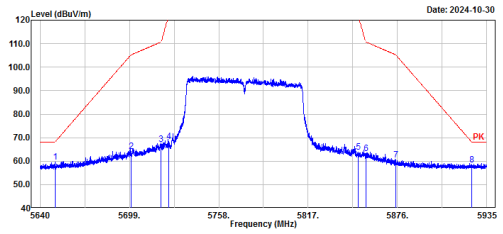

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	51.68	7.89	59.57	68.20	8.63	Peak
2	5700.00	56.24	7.98	64.22	105.20	40.98	Peak
3	5720.00	59.06	8.02	67.08	110.80	43.72	Peak
4	5725.00	60.25	8.03	68.28	122.20	53.92	Peak
5	5850.00	55.71	8.20	63.91	122.20	58.29	Peak
6	5855.00	55.08	8.21	63.29	110.80	47.51	Peak
7	5875.00	52.16	8.28	60.44	105.20	44.76	Peak
8	5925.00	50.01	8.40	58.41	68.20	9.79	Peak

802.11ac vht80, 5775MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3_middle channel 5775MHz

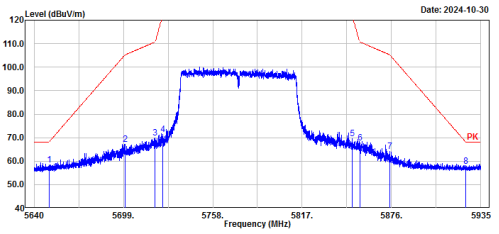

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	50.45	7.89	58.34	68.20	9.86	Peak
2	5700.00	59.12	7.98	67.10	105.20	38.10	Peak
3	5720.00	61.85	8.02	69.87	110.80	40.93	Peak
4	5725.00	63.30	8.03	71.33	122.20	50.87	Peak
5	5850.00	61.28	8.20	69.48	122.20	52.72	Peak
6	5855.00	59.43	8.21	67.64	110.80	43.16	Peak
7	5875.00	56.02	8.28	64.30	105.20	40.90	Peak
8	5925.00	49.30	8.40	57.70	68.20	10.50	Peak

802.11ax he20, 5745MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax20_U-NII-3_low channel 5745MHz

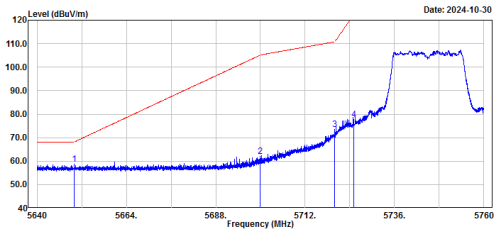

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	50.80	7.89	58.69	68.20	9.51	Peak
2	5700.00	54.18	7.98	62.16	105.20	43.04	Peak
3	5720.00	65.38	8.02	73.40	110.80	37.40	Peak
4	5725.00	69.81	8.03	77.84	122.20	44.36	Peak

802.11ax he20, 5745MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax20_U-NII-3_low channel 5745MHz

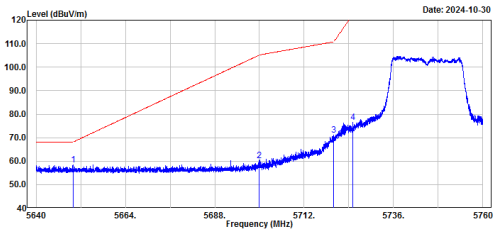

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	50.64	7.89	58.53	68.20	9.67	Peak
2	5700.00	52.31	7.98	60.29	105.20	44.91	Peak
3	5720.00	62.97	8.02	70.99	110.80	39.81	Peak
4	5725.00	68.60	8.03	76.63	122.20	45.57	Peak

802.11ax he20, 5825MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax20_U-NII-3_high channel 5825MHz

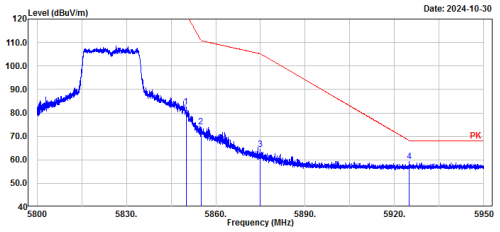

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.00	74.34	8.20	82.54	122.20	39.66	Peak
2	5855.00	65.76	8.21	73.97	110.80	36.83	Peak
3	5875.00	56.06	8.28	64.34	105.20	40.86	Peak
4	5925.00	51.00	8.40	59.40	68.20	8.80	Peak

802.11ax he20, 5825MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax20_U-NII-3_high channel 5825MHz

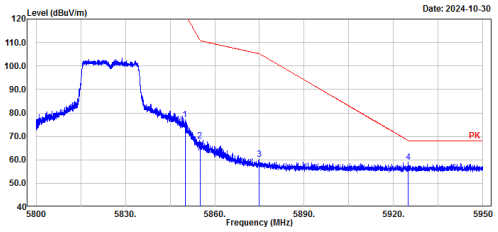

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.00	69.02	8.20	77.22	122.20	44.98	Peak
2	5855.00	59.93	8.21	68.14	110.80	42.66	Peak
3	5875.00	51.89	8.28	60.17	105.20	45.03	Peak
4	5925.00	50.60	8.40	59.00	68.20	9.20	Peak

802.11ax he40, 5755MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax40_U-NII-3_low channel 5755MHz

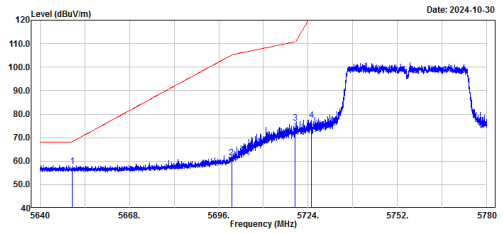

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	49.96	7.89	57.85	68.20	10.35	Peak
2	5700.00	53.54	7.98	61.52	105.20	43.68	Peak
3	5720.00	68.22	8.02	76.24	110.80	34.56	Peak
4	5725.00	69.51	8.03	77.54	122.20	44.66	Peak

802.11ax he40, 5755MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax40_U-NII-3_low channel 5755MHz

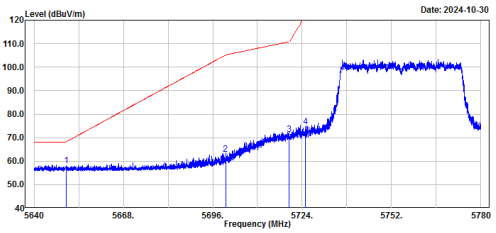

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	50.14	7.89	58.03	68.20	10.17	Peak
2	5700.00	54.95	7.98	62.93	105.20	42.27	Peak
3	5720.00	63.50	8.02	71.52	110.80	39.28	Peak
4	5725.00	66.64	8.03	74.67	122.20	47.53	Peak

802.11ax he40, 5795MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax40_U-NII-3_high channel 5795MHz

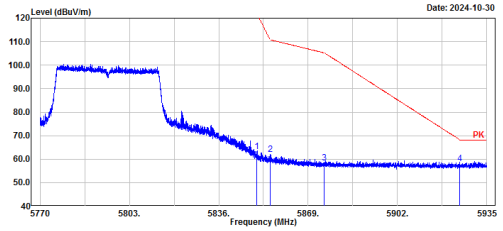

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.00	55.02	8.20	63.22	122.20	58.98	Peak
2	5855.00	53.72	8.21	61.93	110.80	48.87	Peak
3	5875.00	49.99	8.28	58.27	105.20	46.93	Peak
4	5925.00	49.86	8.40	58.26	68.20	9.94	Peak

802.11ax he40, 5795MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax40_U-NII-3_high channel 5795MHz

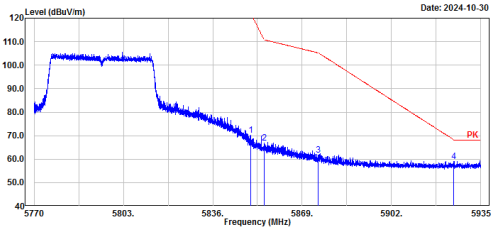

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.00	61.97	8.20	70.17	122.20	52.03	Peak
2	5855.00	58.77	8.21	66.98	110.80	43.82	Peak
3	5875.00	53.60	8.28	61.88	105.20	43.32	Peak
4	5925.00	50.75	8.40	59.15	68.20	9.05	Peak

802.11ax he80, 5775MHz, Bandedge, Horizontal

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax80_U-NII-3_middle channel 5775MHz

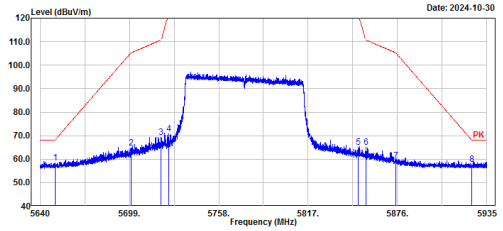

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	50.64	7.89	58.53	68.20	9.67	Peak
2	5700.00	56.78	7.98	64.76	105.20	40.44	Peak
3	5720.00	61.33	8.02	69.35	110.80	41.45	Peak
4	5725.00	62.67	8.03	70.70	122.20	51.50	Peak
5	5850.00	56.99	8.20	65.19	122.20	57.01	Peak
6	5855.00	56.71	8.21	64.92	110.80	45.88	Peak
7	5875.00	51.14	8.28	59.42	105.20	45.78	Peak
8	5925.00	49.44	8.40	57.84	68.20	10.36	Peak

802.11ax he80, 5775MHz, Bandedge, Vertical

Project No.: 2402U80231E-RF-A1 Serial No.: 2MQ4-2
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11ax80_U-NII-3_middle channel 5775MHz

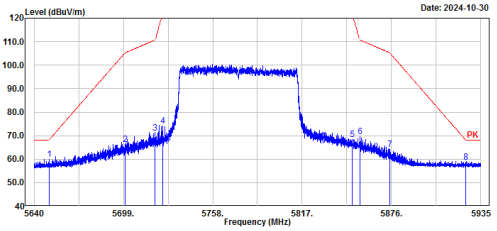

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	52.02	7.89	59.91	68.20	8.29	Peak
2	5700.00	58.27	7.98	66.25	105.20	38.95	Peak
3	5720.00	62.97	8.02	70.99	110.80	39.81	Peak
4	5725.00	66.17	8.03	74.20	122.20	48.00	Peak
5	5850.00	60.30	8.20	68.50	122.20	53.70	Peak
6	5855.00	61.38	8.21	69.59	110.80	41.21	Peak
7	5875.00	55.99	8.28	64.27	105.20	40.93	Peak
8	5925.00	50.36	8.40	58.76	68.20	9.44	Peak

5.3 Emission Bandwidth

Serial No.:	2MQ4-1	**Test Date:**	2024/06/28~2024/08/29
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C):	25.3~26.9	**Relative Humidity: (%)**	48~58	**ATM Pressure: (kPa)**	99.8~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023/10/18	2024/10/17
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM502	2024/06/07	2025/06/06

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

26dB Emission Bandwidth:

Test Data:

5250-5350 MHz

Mode	Value (MHz)
a_5260MHz	26.715
a_5280MHz	26.334
a_5320MHz	25.909
n20_5260MHz	24.921
n20_5280MHz	23.114
n20_5320MHz	23.114
n40_5270MHz	44.800
n40_5310MHz	44.500
ac20_5260MHz	22.950
ac20_5280MHz	22.724
ac20_5320MHz	23.084
ac40_5270MHz	45.000
ac40_5310MHz	45.300
ac80_5290MHz	88.600
ax20_5260MHz_RU_242/61	40.812
ax20_5280MHz_RU_242/61	38.486
ax20_5320MHz_RU_242/61	26.610
ax40_5270MHz_RU_484/65	77.408
ax40_5310MHz_RU_484/65	86.056
ax80_5290MHz_RU_996/67	185.101

5470-5725 MHz

Mode	Value (MHz)
a_5500MHz	29.992
a_5580MHz	29.100
a_5700MHz	24.958
a_5720MHz	26.523
n20_5500MHz	39.748
n20_5580MHz	37.466
n20_5700MHz	23.316
n20_5720MHz	22.987
n40_5510MHz	47.915
n40_5550MHz	46.900
n40_5670MHz	46.000
n40_5710MHz	45.500
ac20_5500MHz	21.992
ac20_5580MHz	21.886
ac20_5700MHz	21.989
ac20_5720MHz	21.935
ac40_5510MHz	43.900
ac40_5550MHz	43.900
ac40_5670MHz	43.800
ac40_5710MHz	43.800
ac80_5530MHz	88.200
ac80_5610MHz	88.000
ac80_5690MHz	87.600
ax20_5500MHz_RU_242/61	46.245
ax20_5580MHz_RU_242/61	39.281
ax20_5700MHz_RU_242/61	44.459
ax20_5720MHz_RU_242/61	52.539
ax40_5510MHz_RU_484/65	95.237
ax40_5550MHz_RU_484/65	81.365
ax40_5670MHz_RU_484/65	81.919
ax40_5710MHz_RU_484/65	82.127
ax80_5530MHz_RU_996/67	191.759
ax80_5610MHz_RU_996/67	140.280
ax80_5690MHz_RU_996/67	148.915

5250-5350 MHz

a_5260MHz

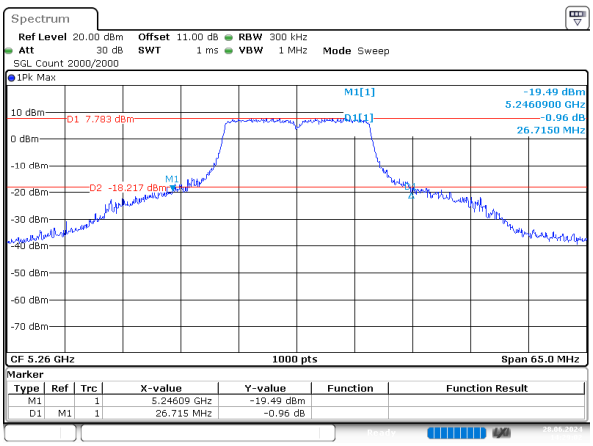

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:29:01

a_5280MHz

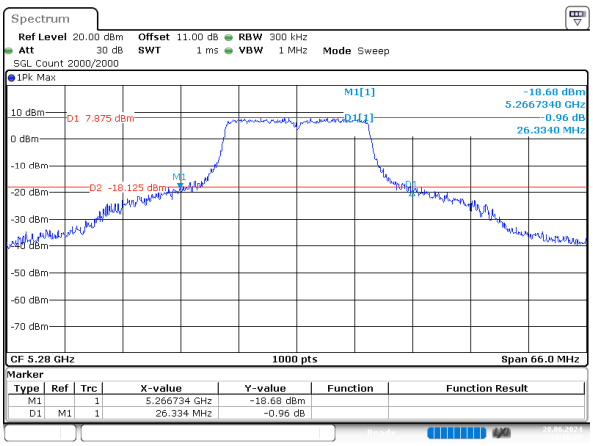

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:30:27

a_5320MHz

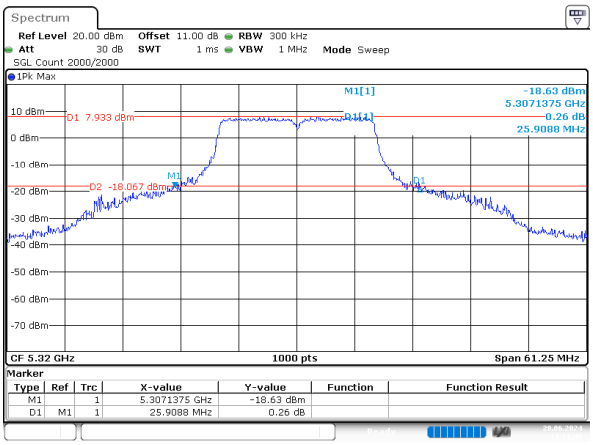

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:31:48

n20_5260MHz

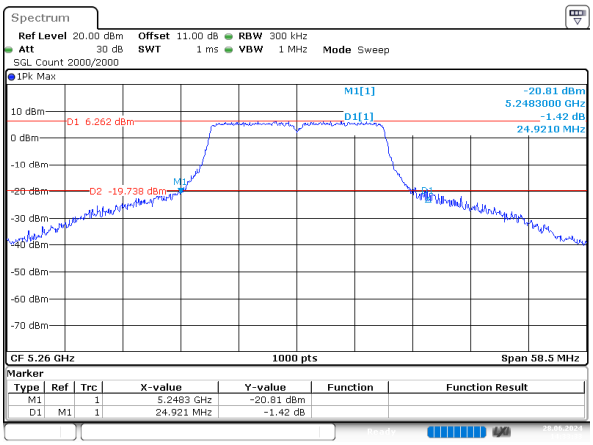

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:33:33

n20_5280MHz

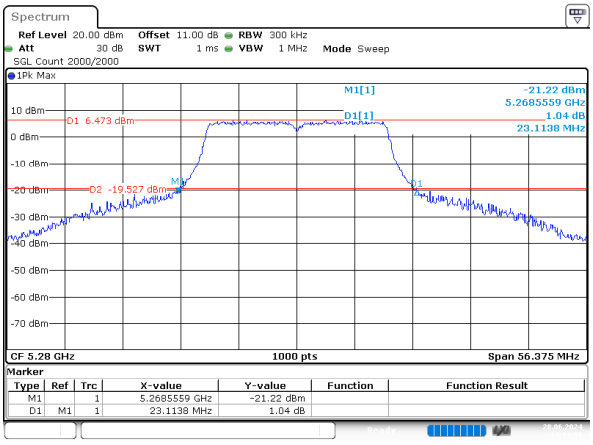

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:34:57

n20_5320MHz

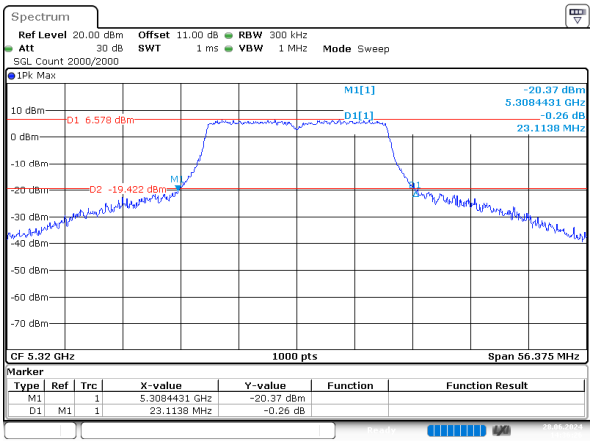

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:36:26

n40_5270MHz

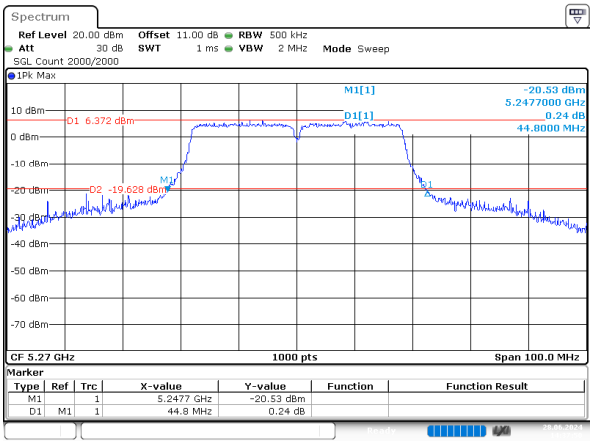

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:37:49

n40_5310MHz

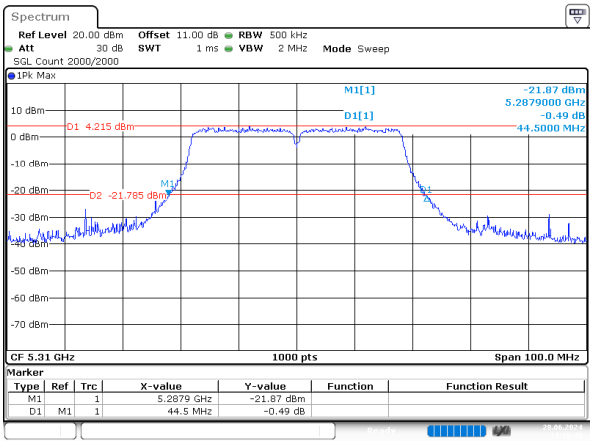

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:38:49

ac20_5260MHz

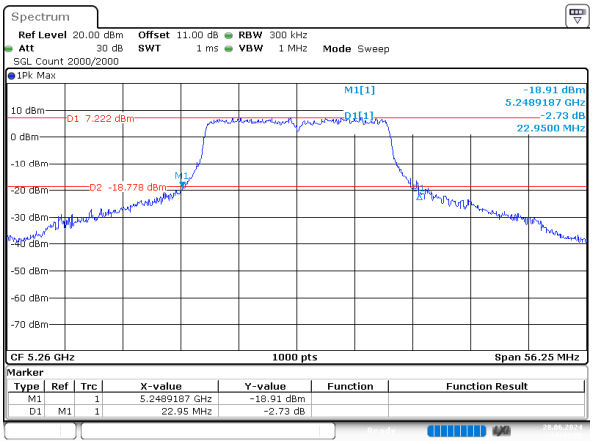

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:42:26

ac20_5280MHz

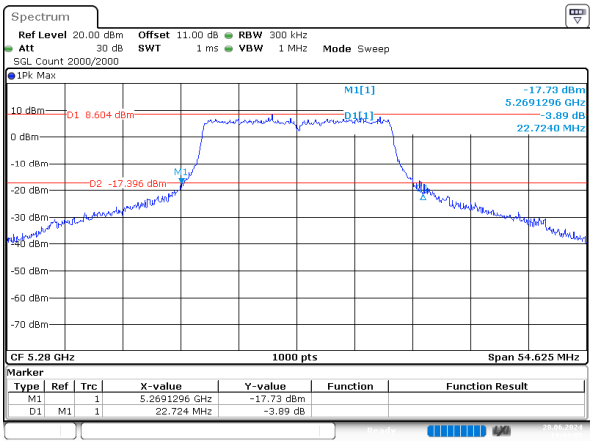

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:44:05

ac20_5320MHz

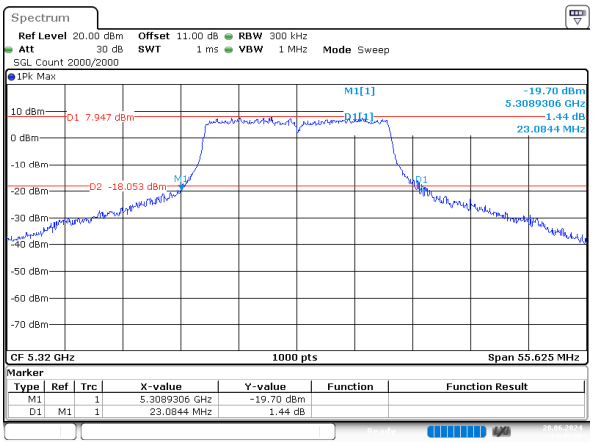

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:45:30

ac40_5270MHz

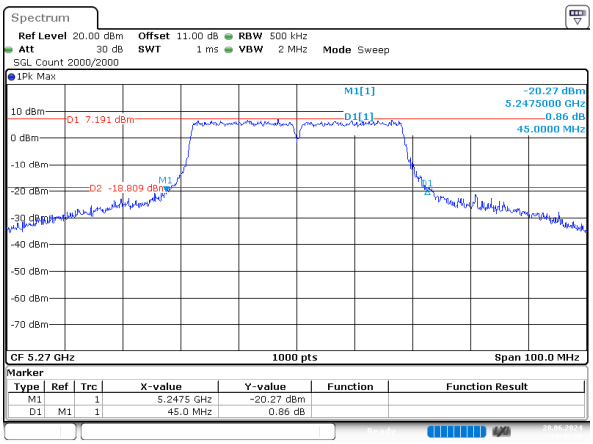

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:46:49

ac40_5310MHz

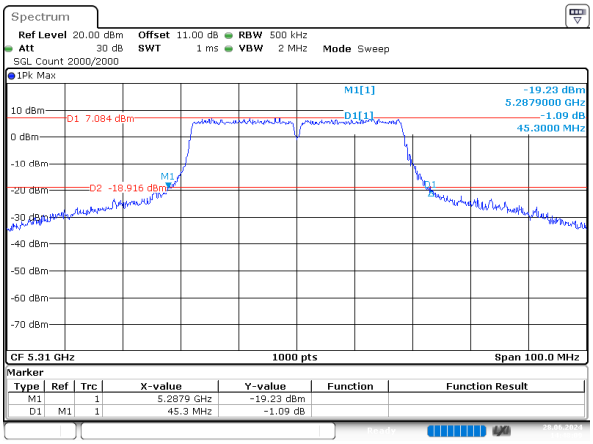

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:48:09

ac80_5290MHz

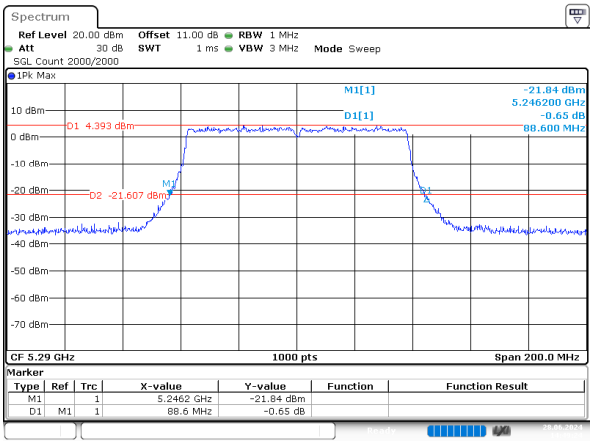

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:49:24

ax20_5260MHz_RU_242/61

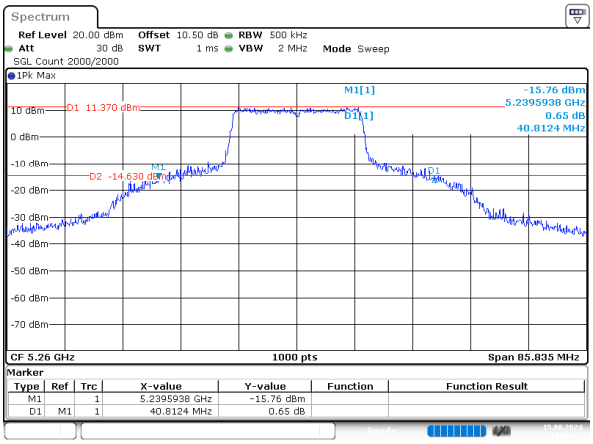

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:03:25

ax20_5280MHz_RU_242/61

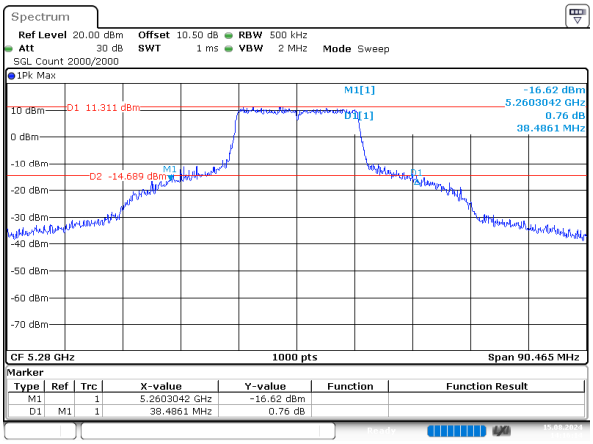

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:16:14

ax20_5320MHz_RU_242/61

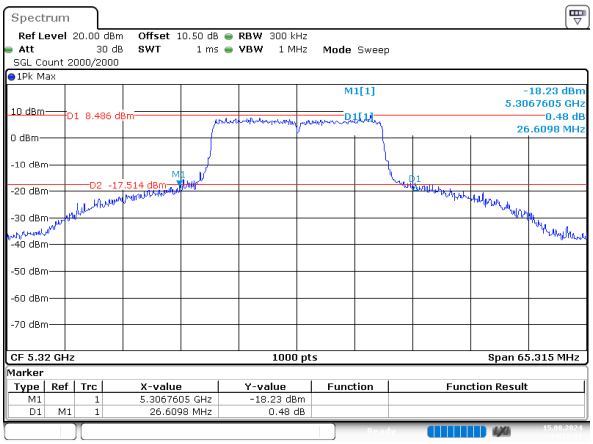

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:38:31

ax40_5270MHz_RU_484/65

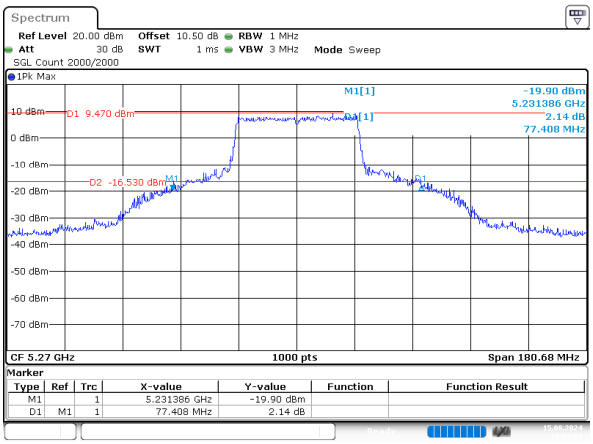

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:53:53

ax40_5310MHz_RU_484/65

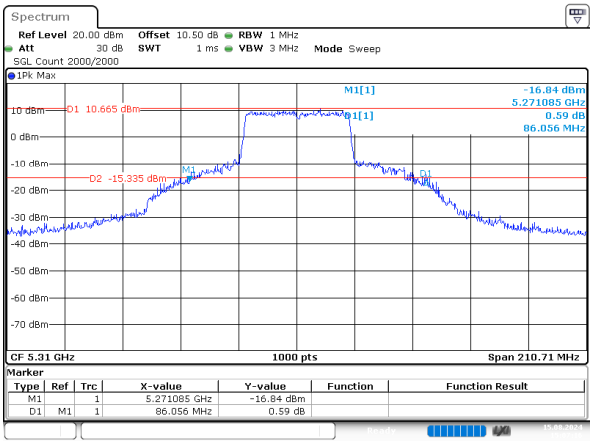

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 15:07:16

ax80_5290MHz_RU_996/67

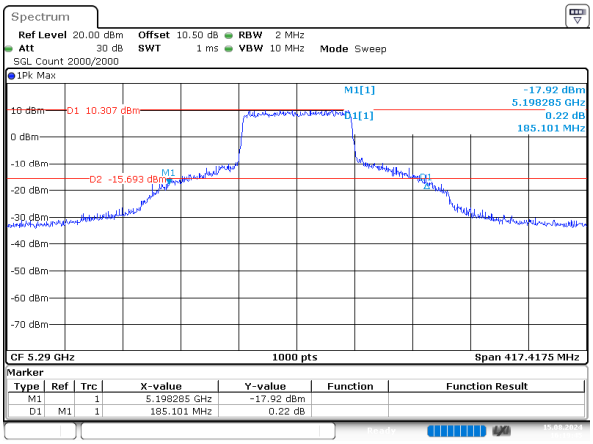

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 16:19:45

5470-5725 MHz

a_5500MHz

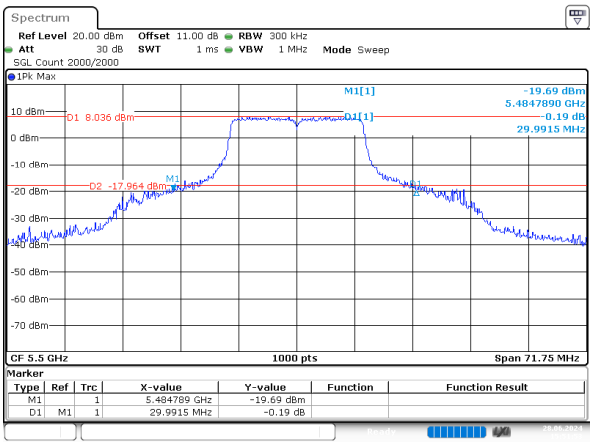

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:51:53

a_5580MHz

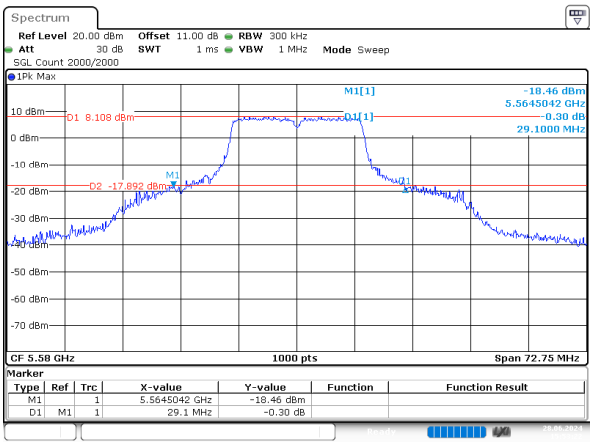

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:53:22

a_5700MHz

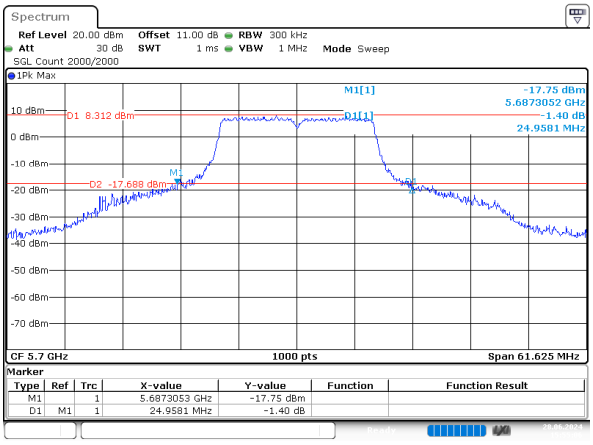

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:55:06

a_5720MHz

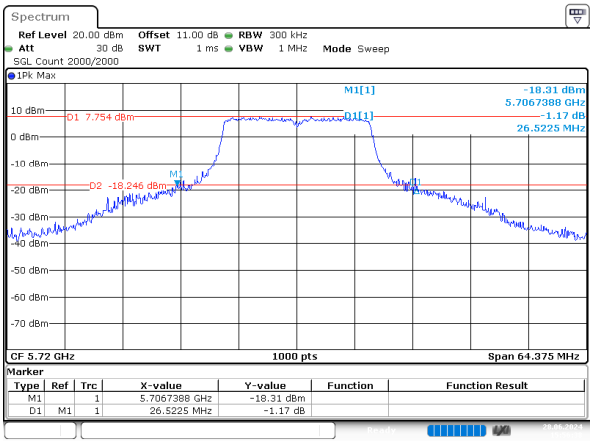

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:56:38

n20_5500MHz

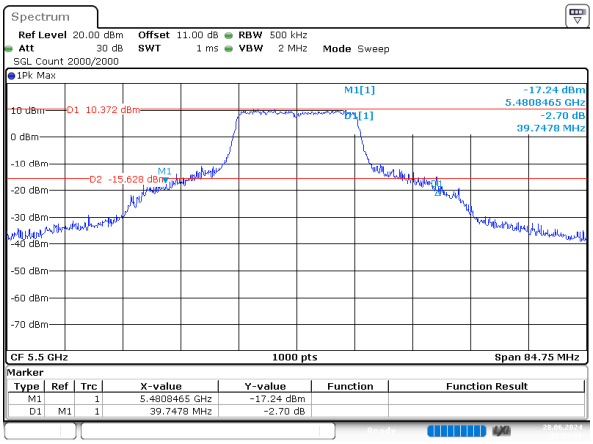

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:59:15

n20_5580MHz

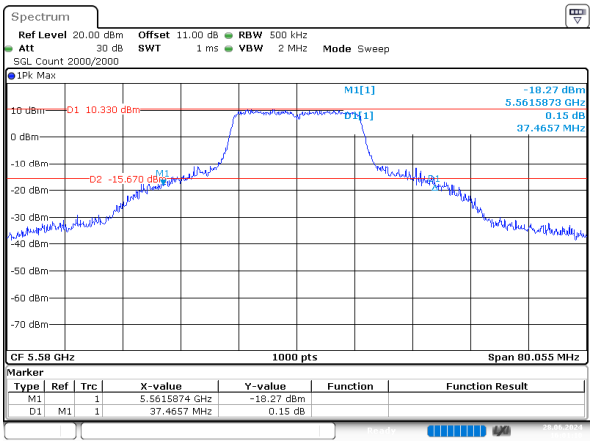

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:01:10

n20_5700MHz

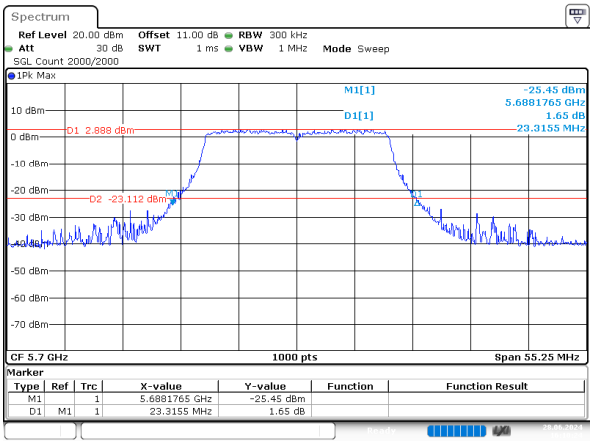

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:10:24

n20_5720MHz

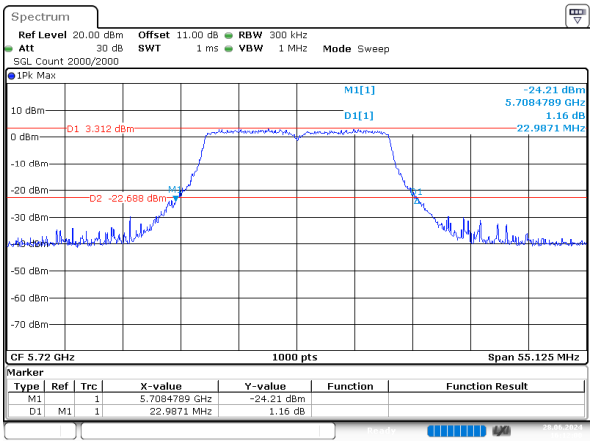

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:12:00

n40_5510MHz

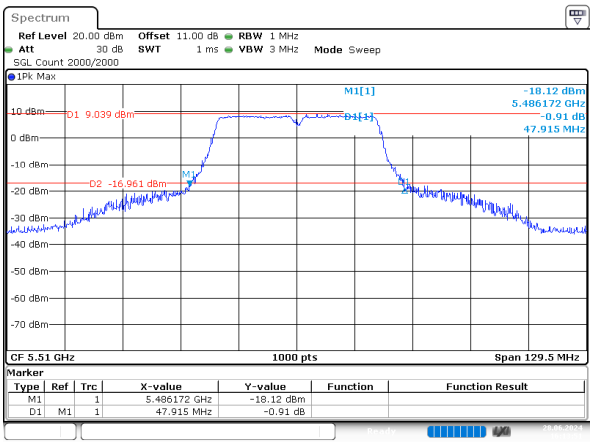

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:13:51

n40_5550MHz

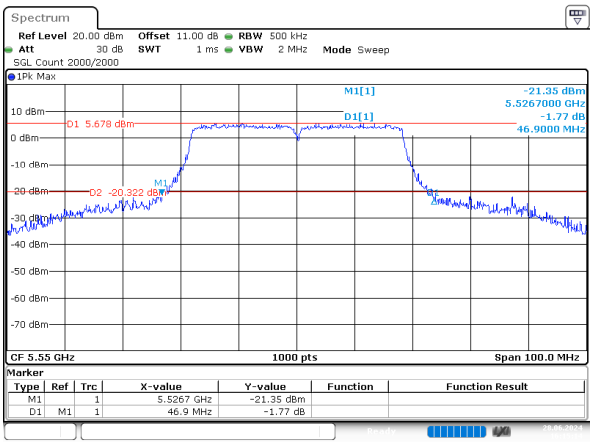

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:15:14

n40_5670MHz

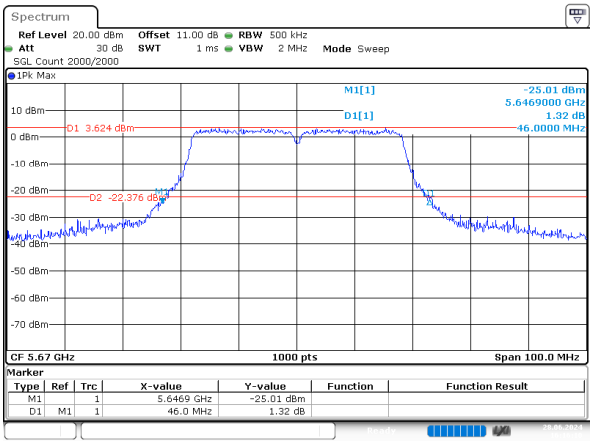

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:16:10

n40_5710MHz

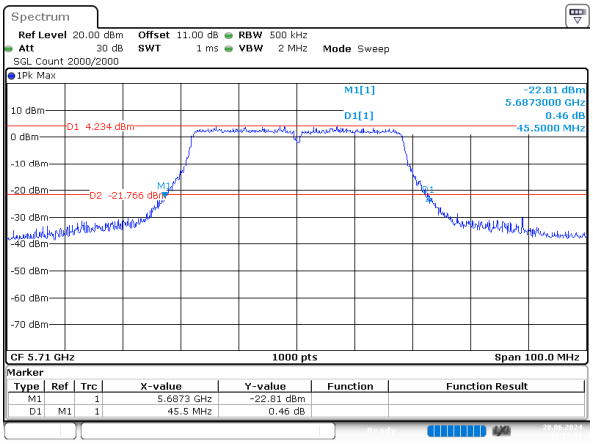

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:17:01

ac20_5500MHz

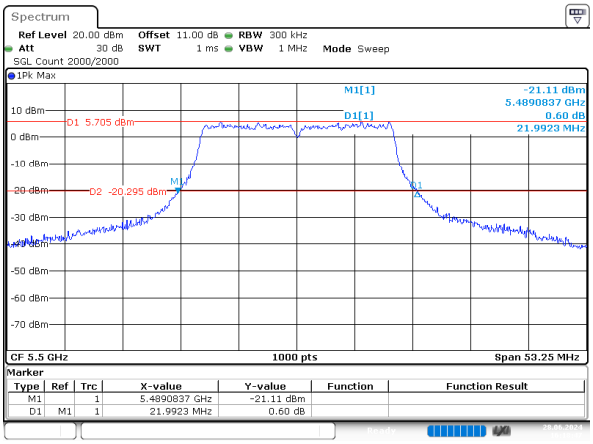

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:18:47

ac20_5580MHz

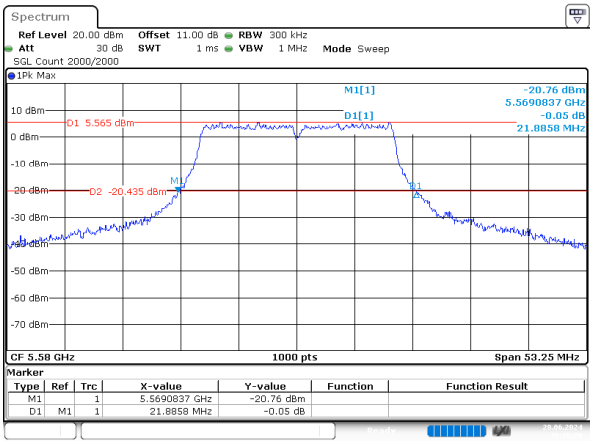

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:20:20

ac20_5700MHz

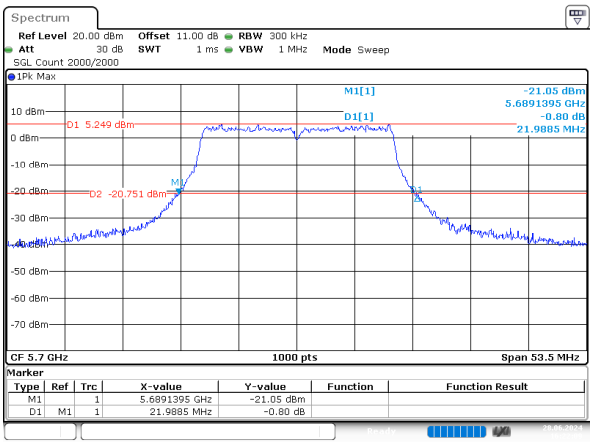

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:22:09

ac20_5720MHz

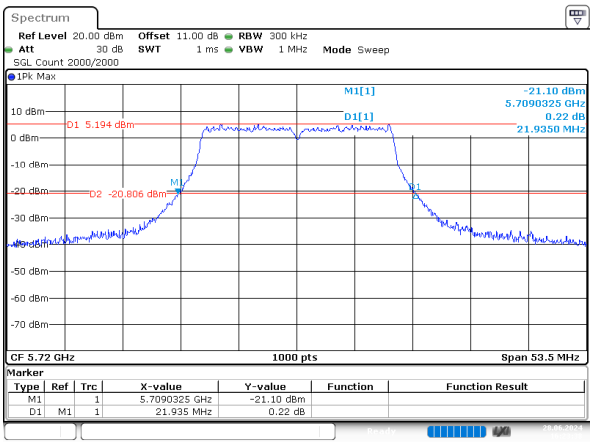

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:23:38

ac40_5510MHz

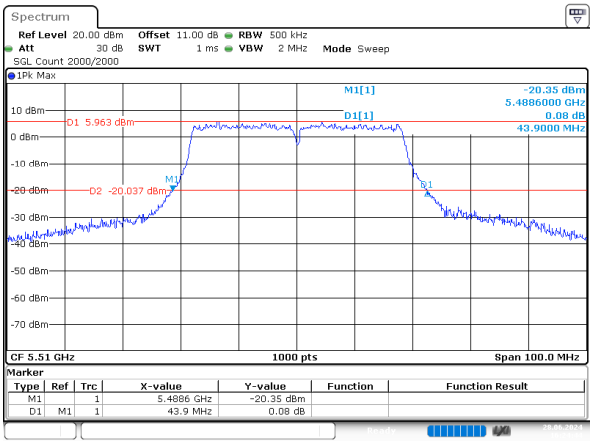

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:24:44

ac40_5550MHz

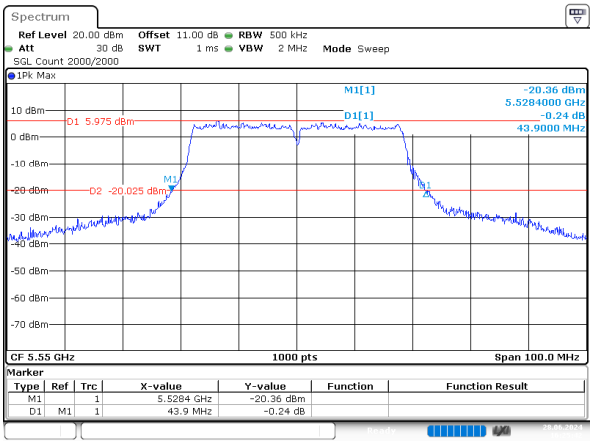

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:25:42

ac40_5670MHz

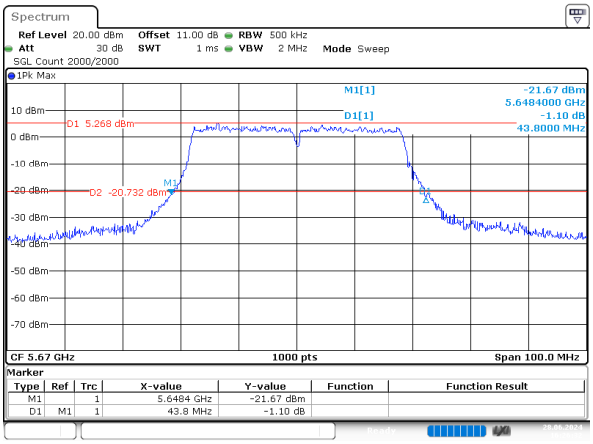

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:26:32

ac40_5710MHz

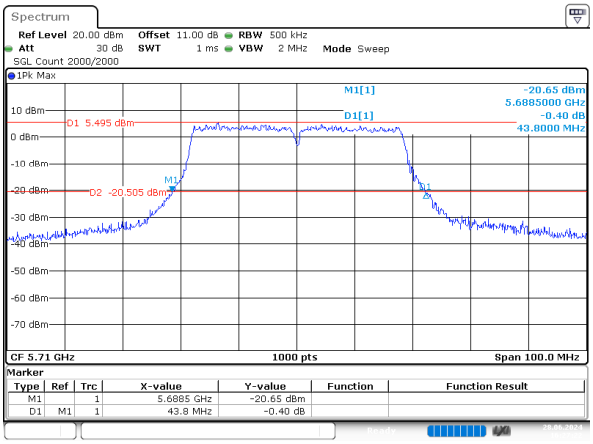

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:27:21

ac80_5530MHz

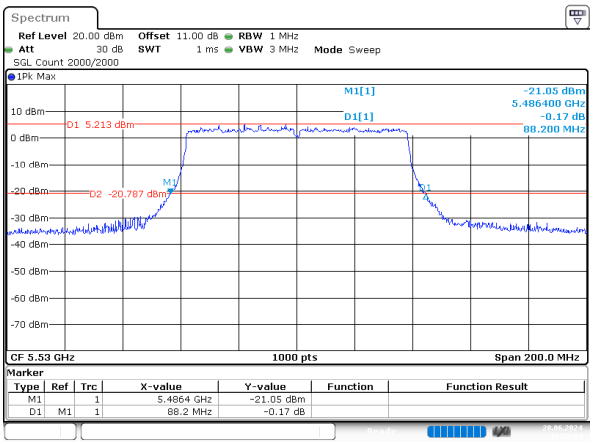

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:28:34

ac80_5610MHz

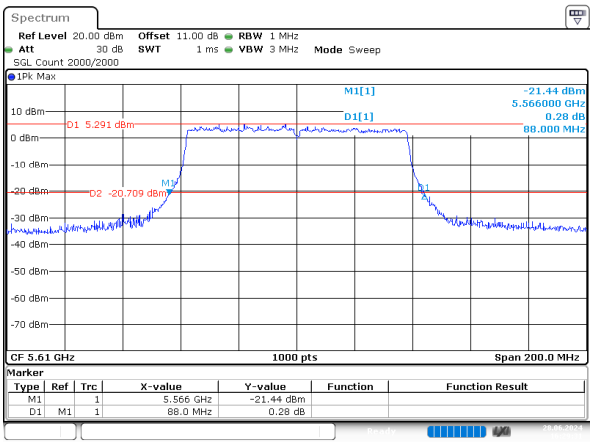

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:29:31

ac80_5690MHz

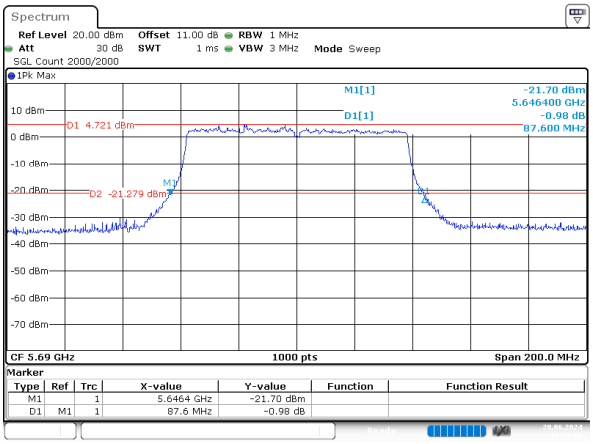

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:30:35

ax20_5500MHz_RU_242/61

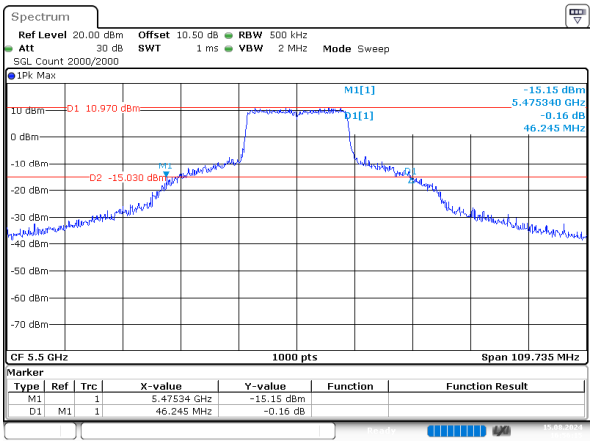

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 16:56:15

ax20_5580MHz_RU_242/61

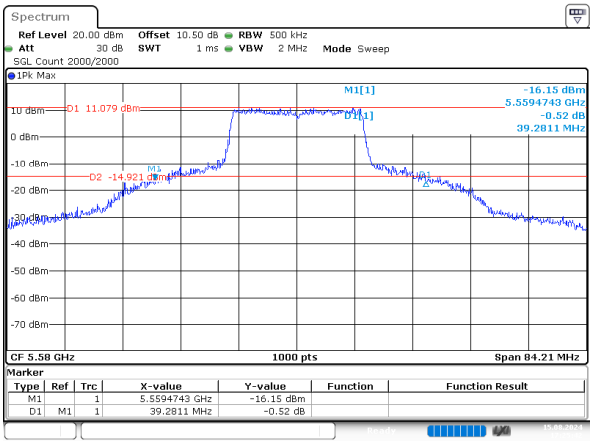

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:25:42

ax20_5700MHz_RU_242/61

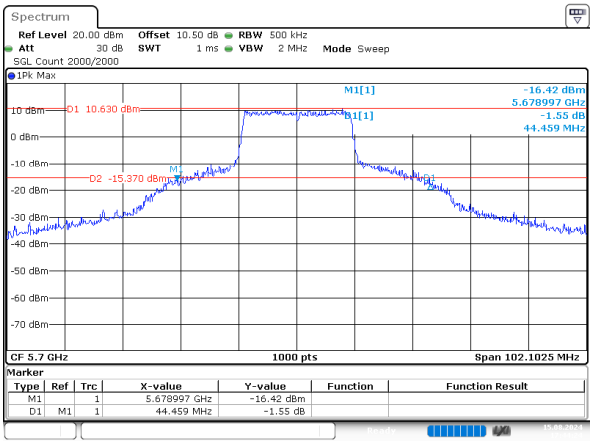

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:44:24

ax20_5720MHz_RU_242/61

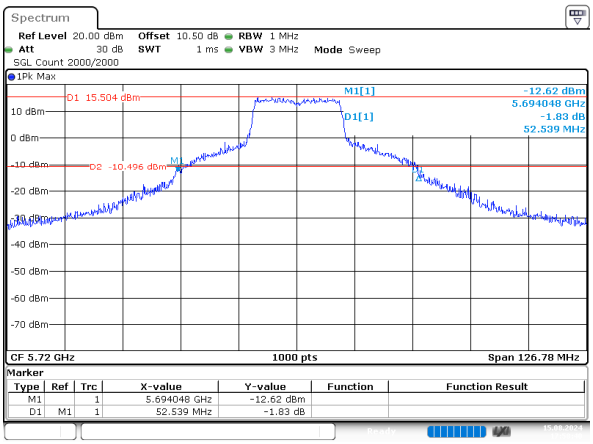

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:58:40

ax40_5510MHz_RU_484/65

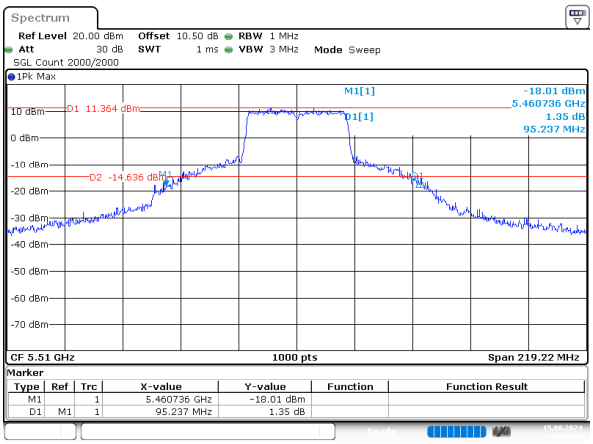

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 18:12:13

ax40_5550MHz_RU_484/65

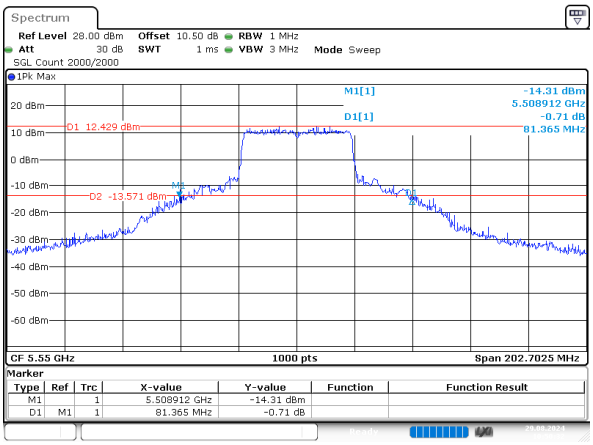

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 29.AUG.2024 10:50:32

ax40_5670MHz_RU_484/65

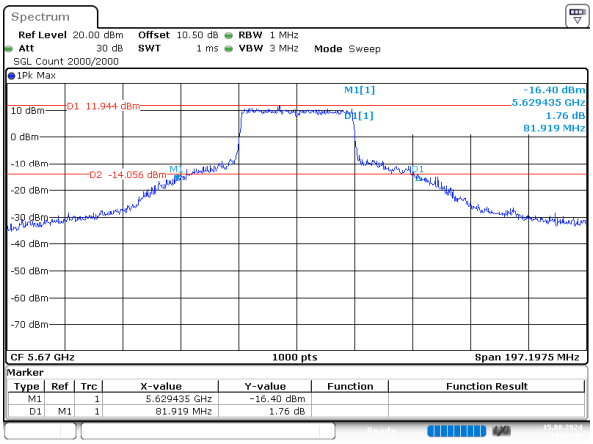

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 19:12:49

ax40_5710MHz_RU_484/65

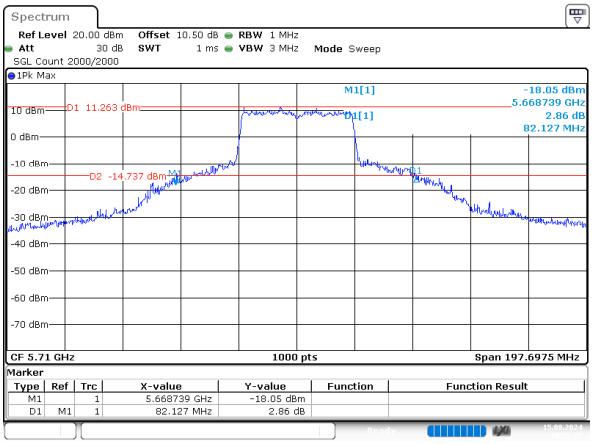

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 19:23:28

ax80_5530MHz_RU_996/67

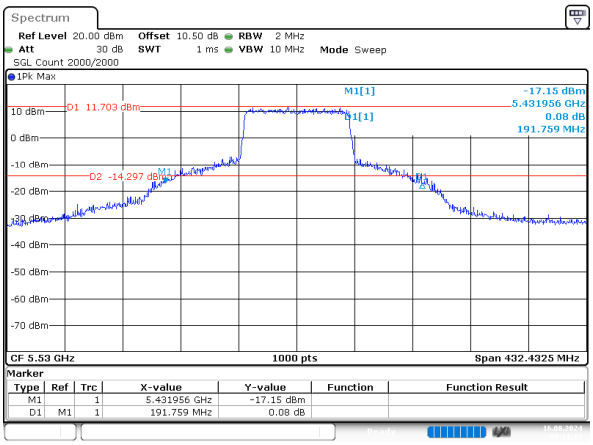

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:11:12

ax80_5610MHz_RU_996/67

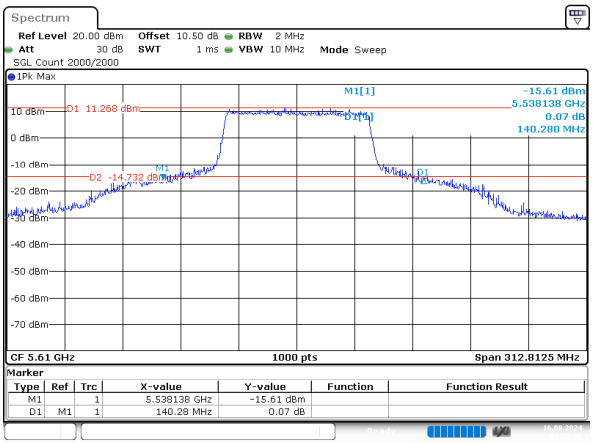

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:27:06

ax80_5690MHz_RU_996/67

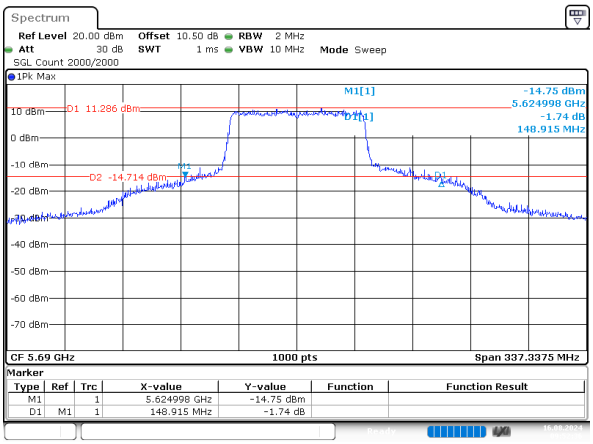

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:52:36

5.4 99% Occupied Bandwidth

Serial No.:	2MQ4-1	**Test Date:**	2024/06/28~2024/08/16
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	/

Environmental Conditions:

Temperature: (°C):	25.6~26.8	**Relative Humidity: (%)**	48~56	**ATM Pressure: (kPa)**	99.8~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023/10/18	2024/10/17
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM502	2024/06/07	2025/06/06

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5250-5350 MHz

Mode	99% OBW (MHz)
a_5260MHz	16.750
a_5280MHz	16.750
a_5320MHz	16.700
n20_5260MHz	17.850
n20_5280MHz	17.850
n20_5320MHz	17.900
n40_5270MHz	36.800
n40_5310MHz	36.700
ac20_5260MHz	17.800
ac20_5280MHz	17.850
ac20_5320MHz	17.800
ac40_5270MHz	36.700
ac40_5310MHz	36.700
ac80_5290MHz	76.400
ax20_5260MHz_RU_242/61	19.250
ax20_5280MHz_RU_242/61	19.250
ax20_5320MHz_RU_242/61	19.100
ax40_5270MHz_RU_484/65	39.200
ax40_5310MHz_RU_484/65	39.800
ax80_5290MHz_RU_996/67	80

5470-5725 MHz

Mode	99% OBW (MHz)
a_5500MHz	16.800
a_5580MHz	16.800
a_5700MHz	16.700
a_5720MHz	16.700
n20_5500MHz	18
n20_5580MHz	18
n20_5700MHz	17.800
n20_5720MHz	17.800
n40_5510MHz	36.900
n40_5550MHz	36.900
n40_5670MHz	36.900
n40_5710MHz	36.800
ac20_5500MHz	17.750
ac20_5580MHz	17.750
ac20_5700MHz	17.800
ac20_5720MHz	17.750
ac40_5510MHz	36.800
ac40_5550MHz	36.800
ac40_5670MHz	36.800
ac40_5710MHz	36.700
ac80_5530MHz	76.200
ac80_5610MHz	76.400
ac80_5690MHz	76.400
ax20_5500MHz_RU_242/61	19.850
ax20_5580MHz_RU_242/61	19.250
ax20_5700MHz_RU_242/61	19.600
ax20_5720MHz_RU_242/61	21.200
ax40_5510MHz_RU_484/65	42.100
ax40_5550MHz_RU_484/65	38.500
ax40_5670MHz_RU_484/65	39.200
ax40_5710MHz_RU_484/65	39.500
ax80_5530MHz_RU_996/67	79.800
ax80_5610MHz_RU_996/67	78.400
ax80_5690MHz_RU_996/67	78.400

5250-5350 MHz

a_5260MHz

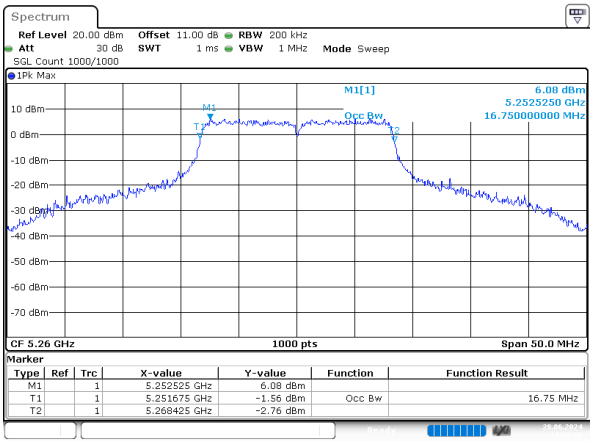

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:28:18

a_5280MHz

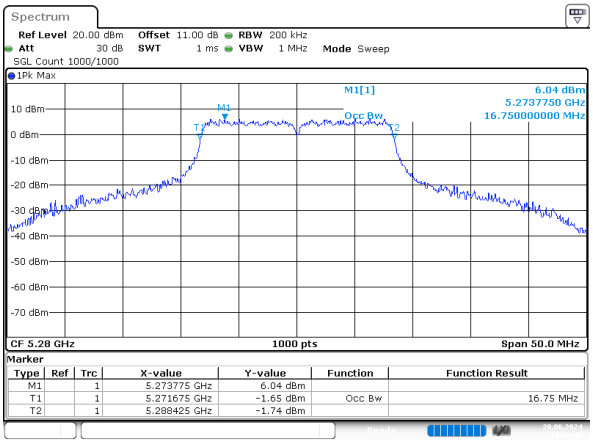

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:29:40

a_5320MHz

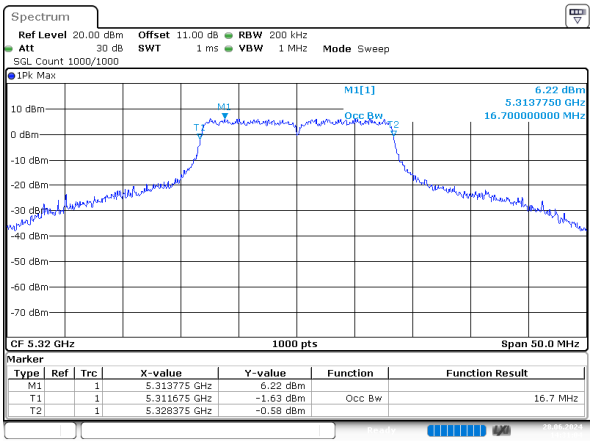

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:31:04

n20_5260MHz

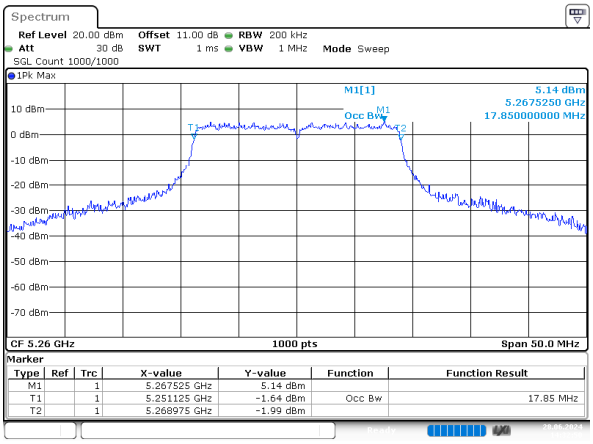

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:32:49

n20_5280MHz

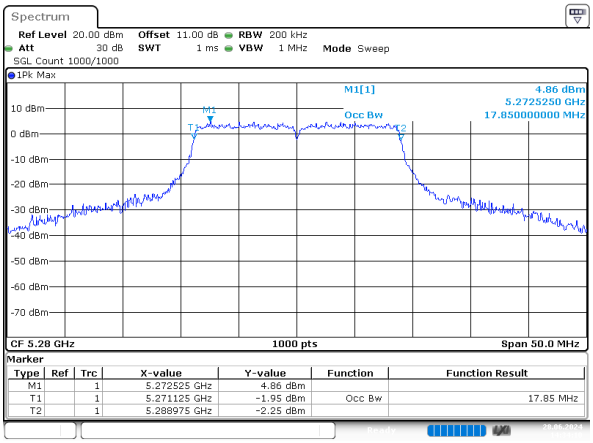

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:34:10

n20_5320MHz

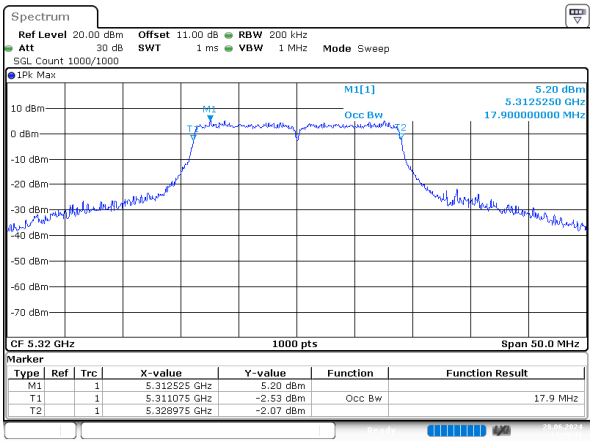

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:35:41

n40_5270MHz

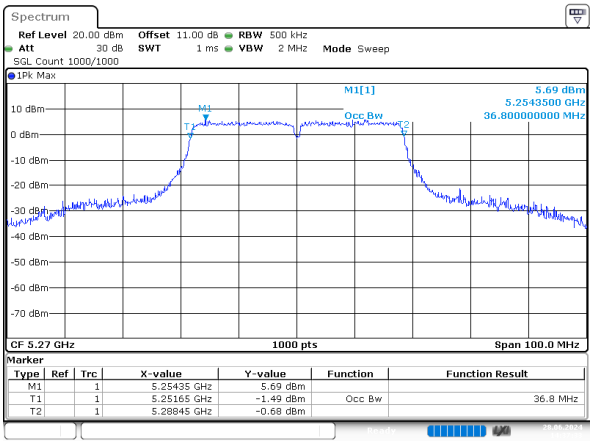

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:37:33

n40_5310MHz

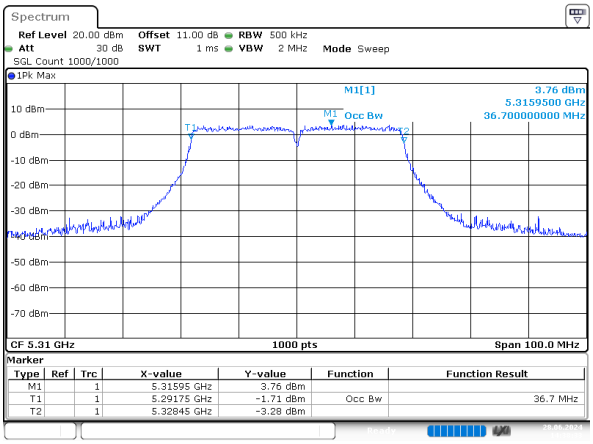

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:38:33

ac20_5260MHz

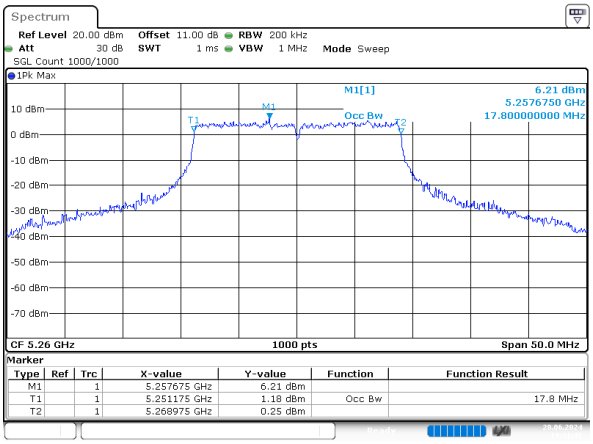

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:41:41

ac20_5280MHz

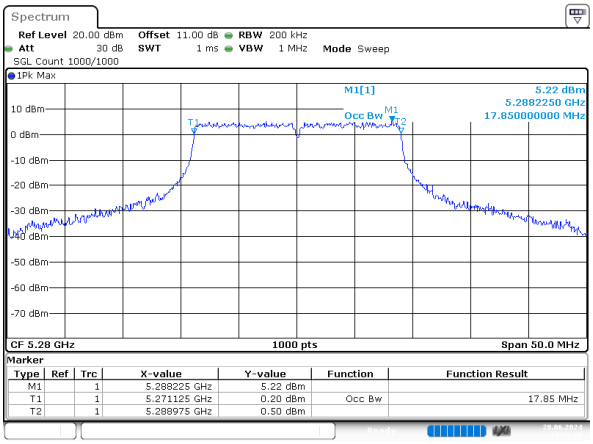

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:43:16

ac20_5320MHz

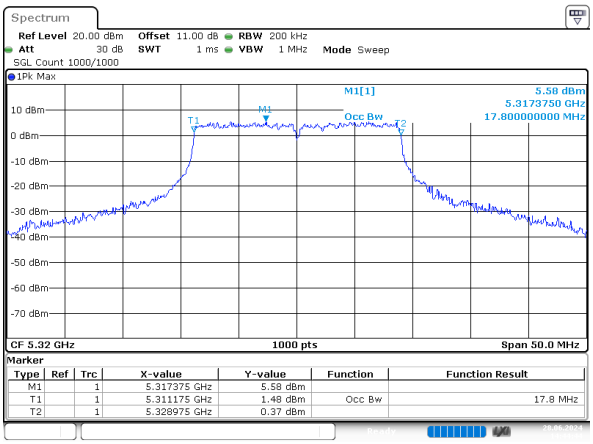

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:44:43

ac40_5270MHz

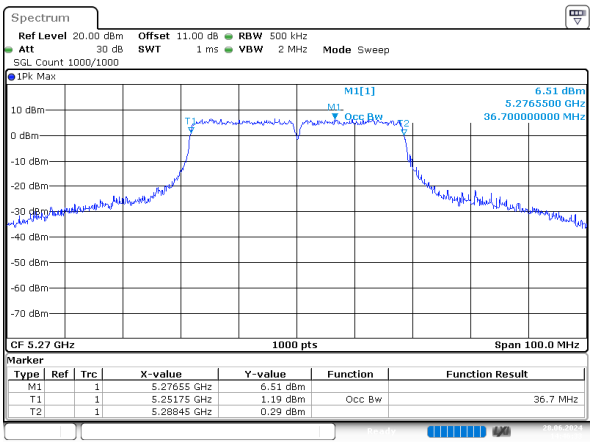

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:46:33

ac40_5310MHz

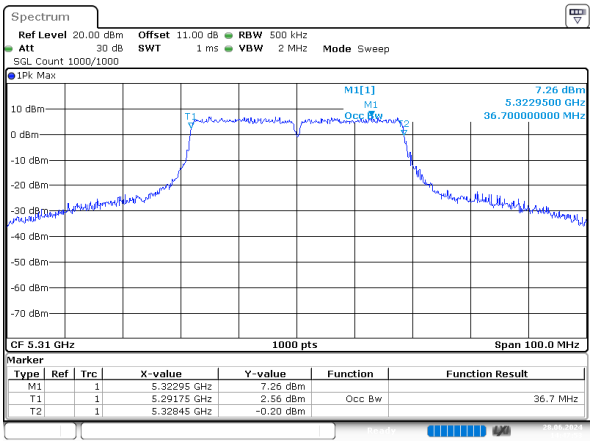

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:47:52

ac80_5290MHz

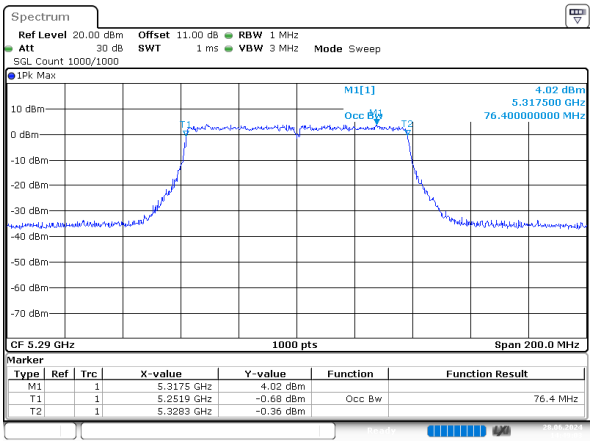

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 14:49:02

ax20_5260MHz_RU_242/61

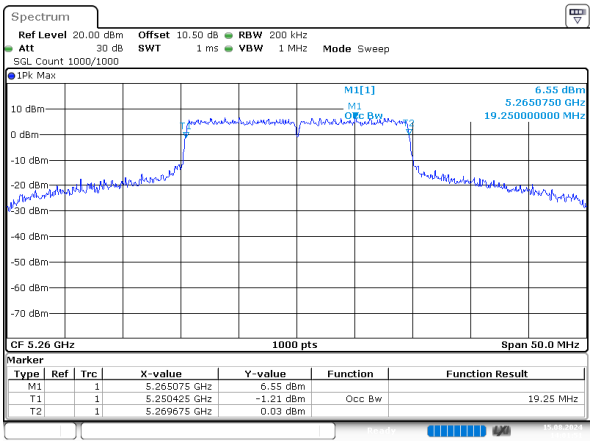

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:01:52

ax20_5280MHz_RU_242/61

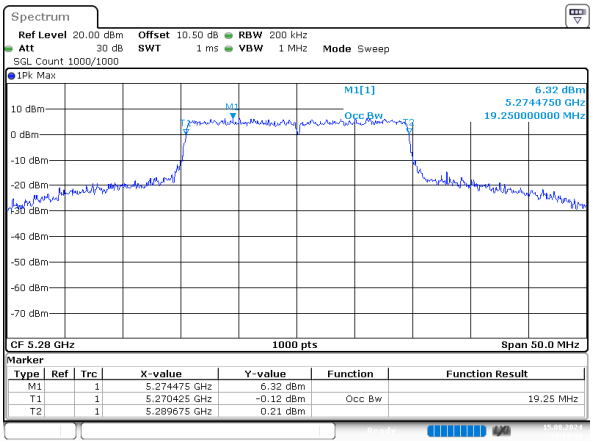

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:14:34

ax20_5320MHz_RU_242/61

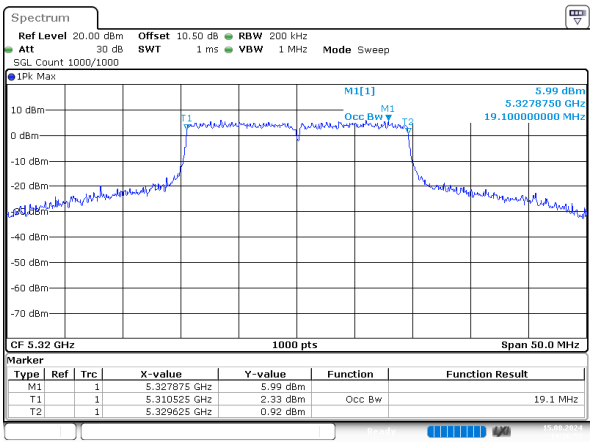

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:36:53

ax40_5270MHz_RU_484/65

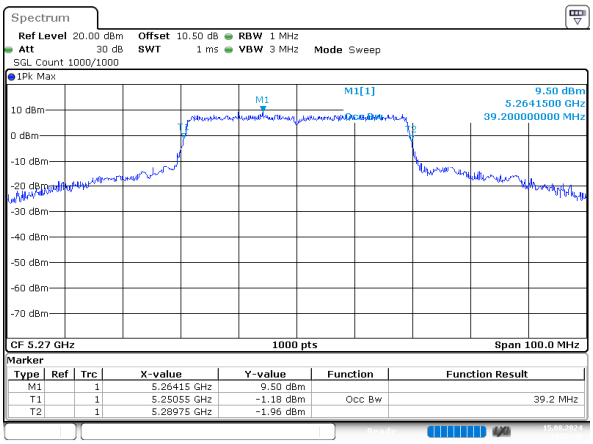

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 14:52:48

ax40_5310MHz_RU_484/65

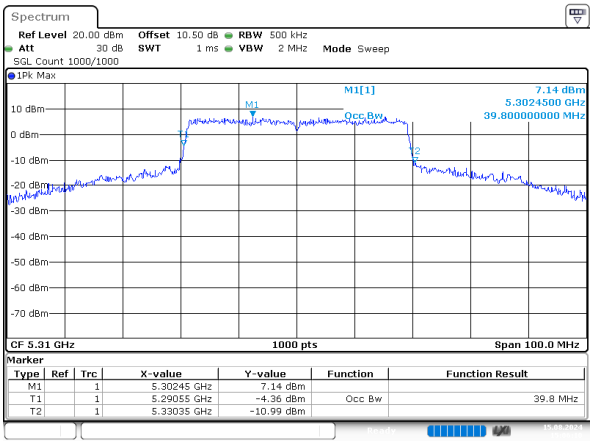

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 15:06:10

ax80_5290MHz_RU_996/67

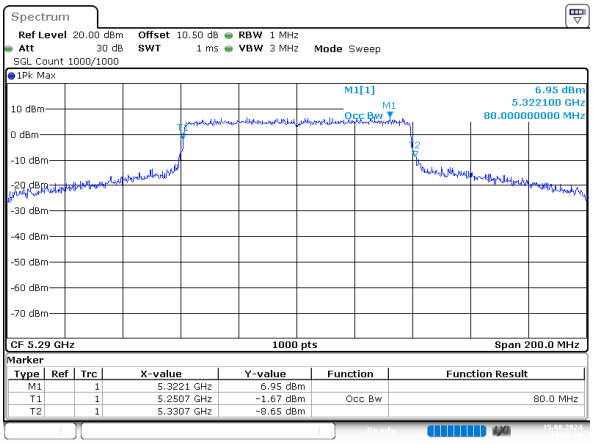

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 16:18:20

5470-5725 MHz

a_5500MHz

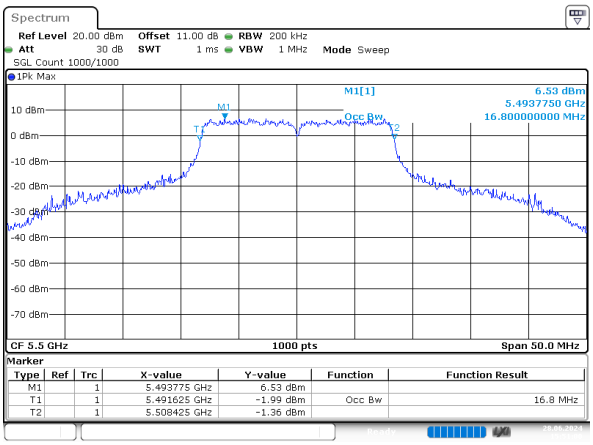

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:51:00

a_5580MHz

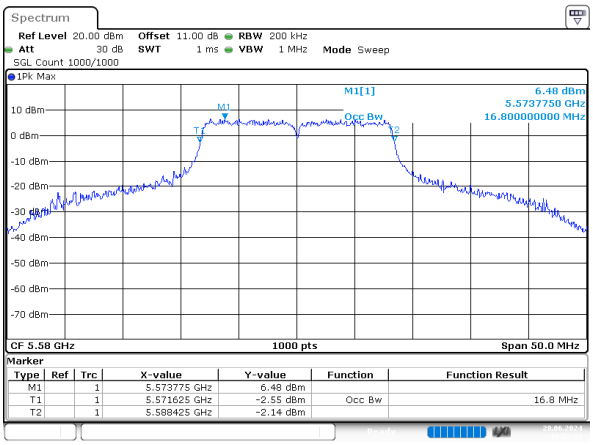

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:52:33

a_5700MHz

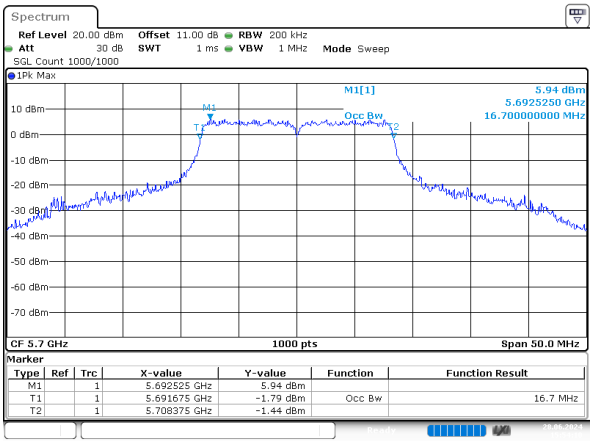

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:54:10

a_5720MHz

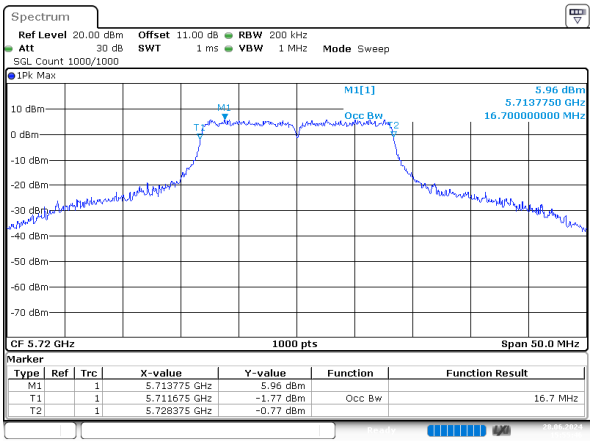

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:55:46

n20_5500MHz

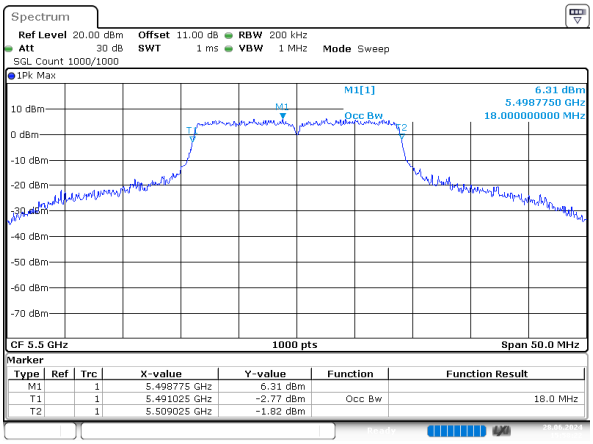

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 15:58:22

n20_5580MHz

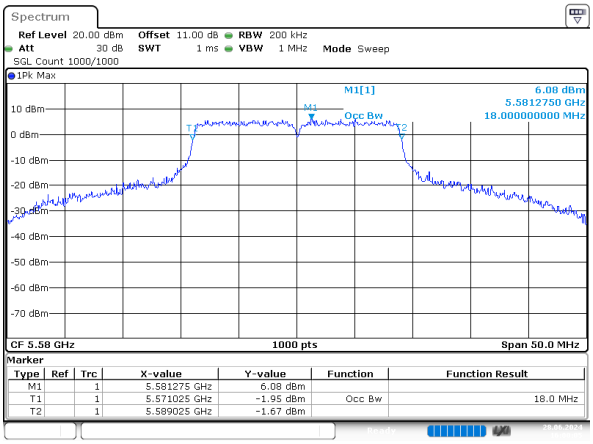

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:00:05

n20_5700MHz

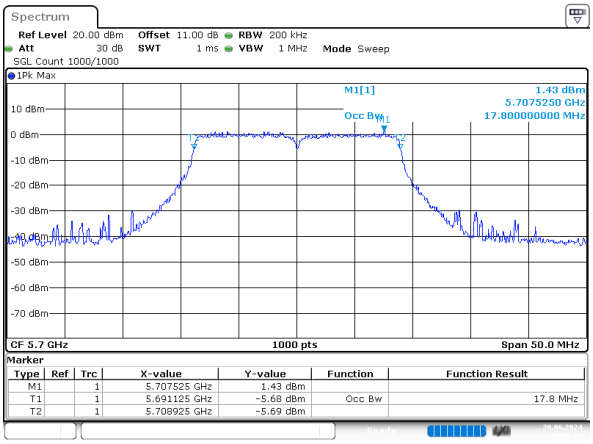

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:09:27

n20_5720MHz

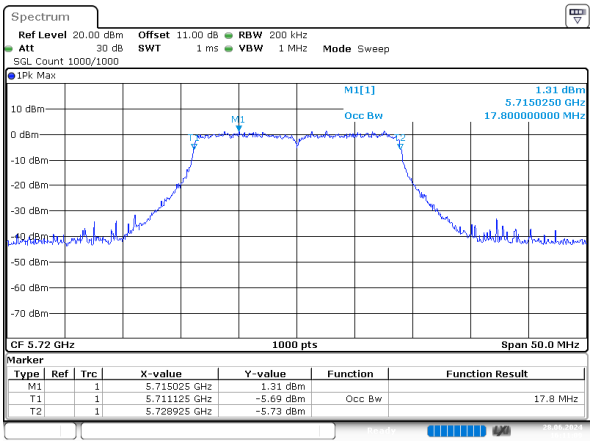

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:11:09

n40_5510MHz

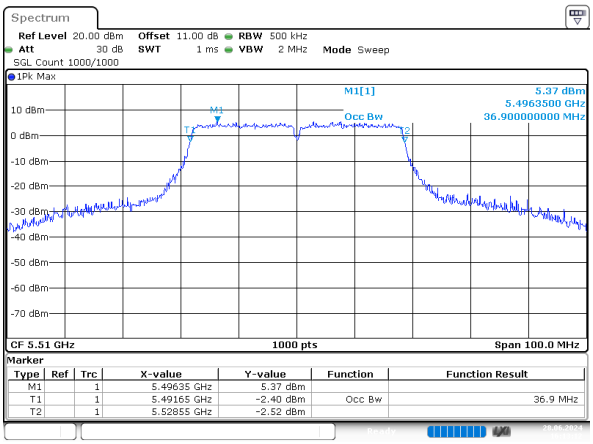

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:13:12

n40_5550MHz

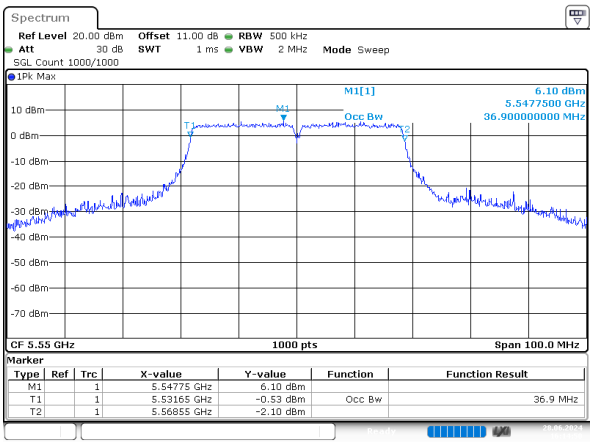

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:14:50

n40_5670MHz

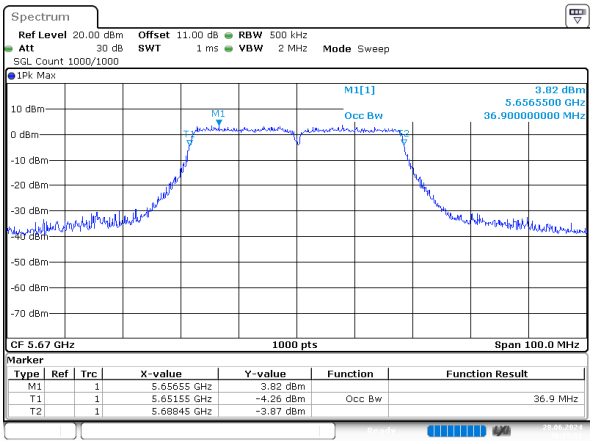

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:15:51

n40_5710MHz

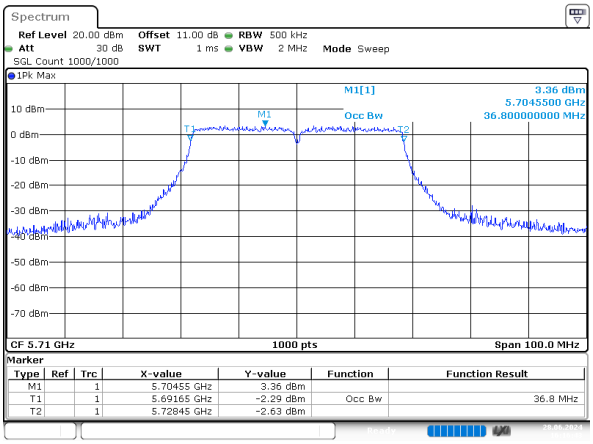

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:16:43

ac20_5500MHz

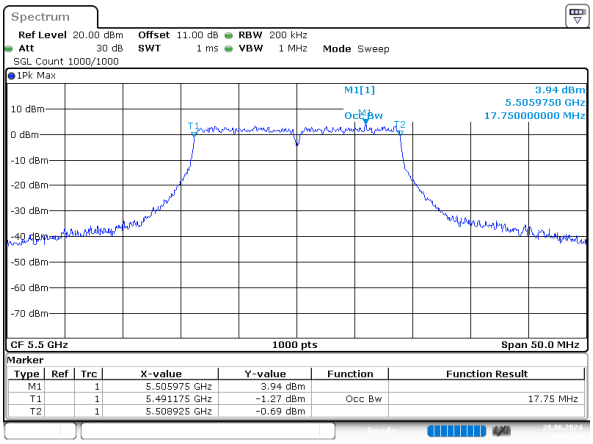

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:17:53

ac20_5580MHz

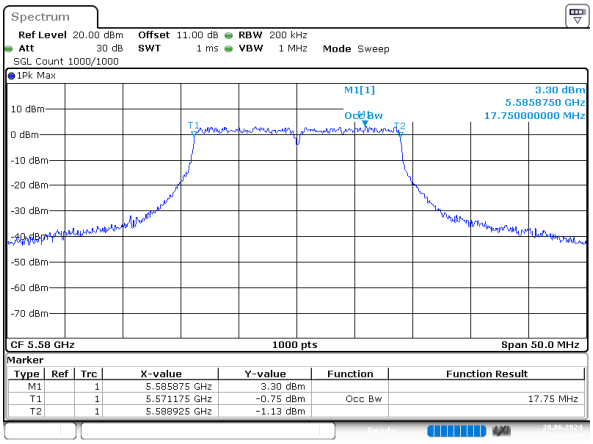

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:19:29

ac20_5700MHz

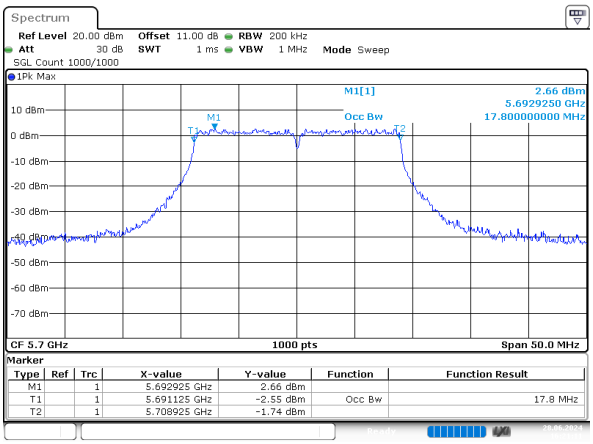

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:21:11

ac20_5720MHz

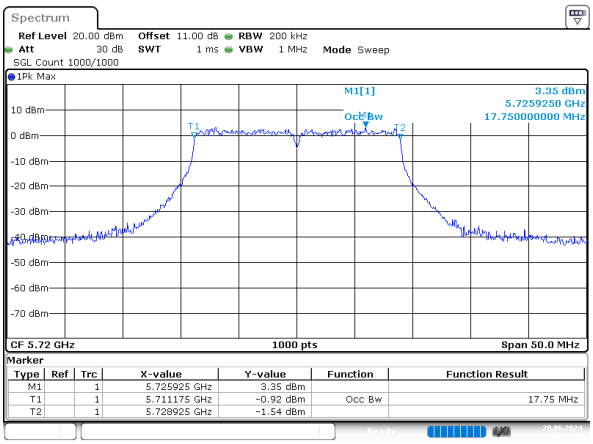

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:22:48

ac40_5510MHz

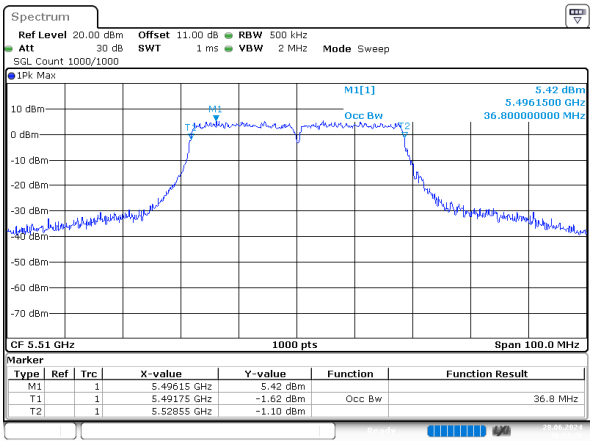

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:24:20

ac40_5550MHz

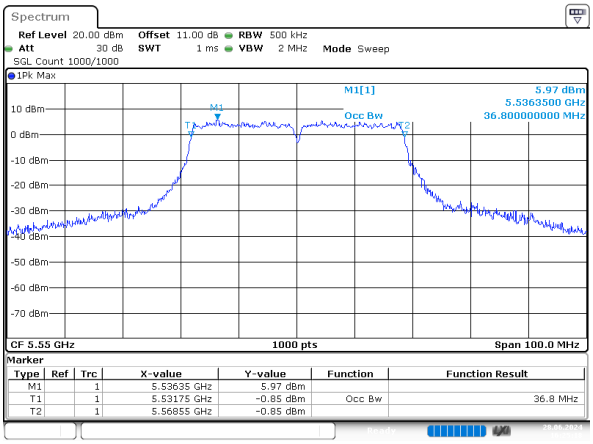

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:25:17

ac40_5670MHz

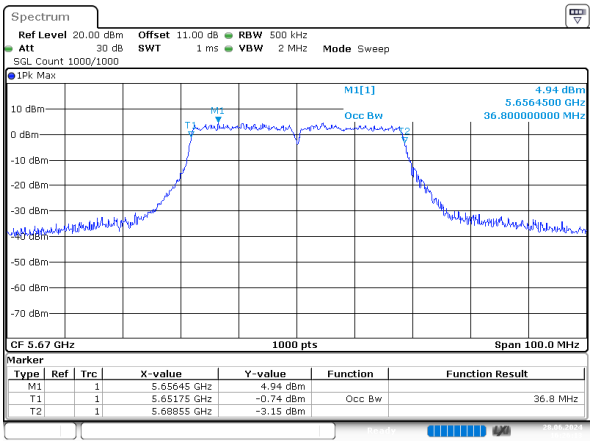

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:26:13

ac40_5710MHz

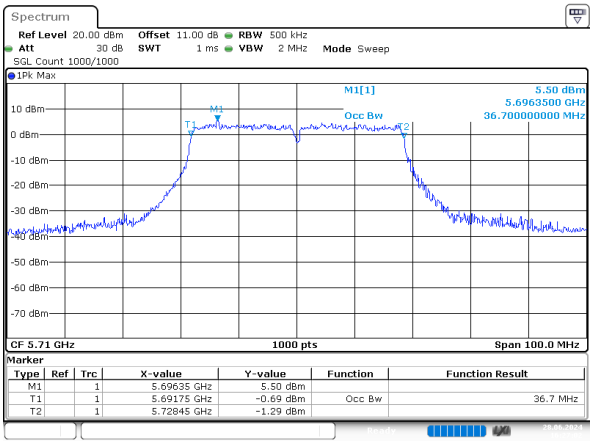

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:27:02

ac80_5530MHz

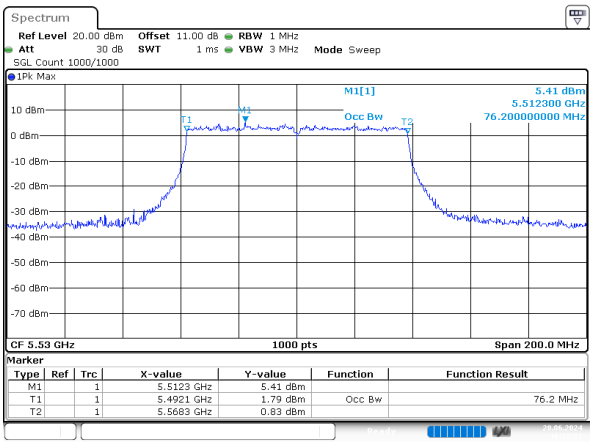

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:28:11

ac80_5610MHz

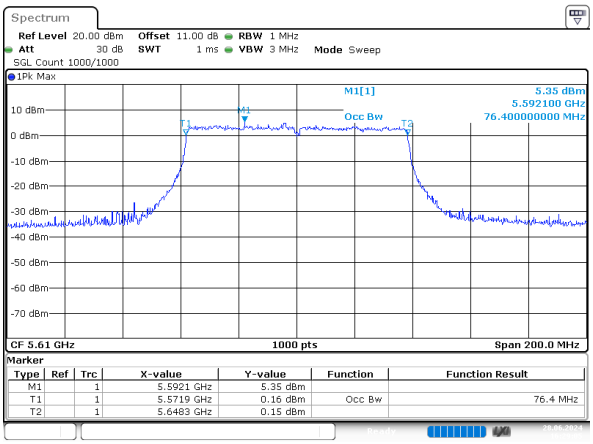

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:29:05

ac80_5690MHz

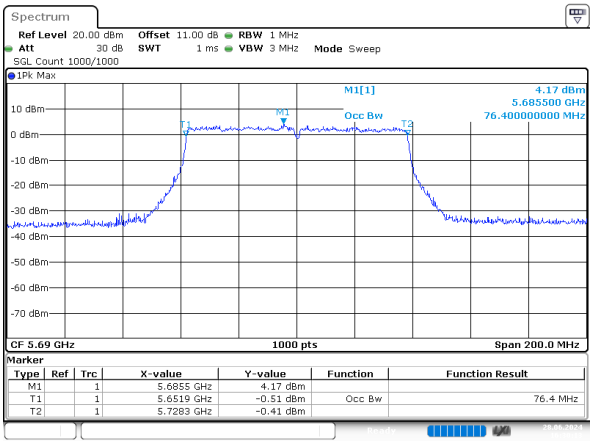

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 28.JUN.2024 16:30:13

ax20_5500MHz_RU_242/61

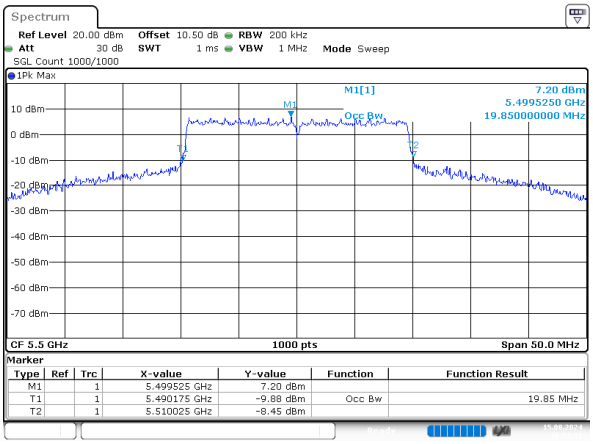

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 16:54:11

ax20_5580MHz_RU_242/61

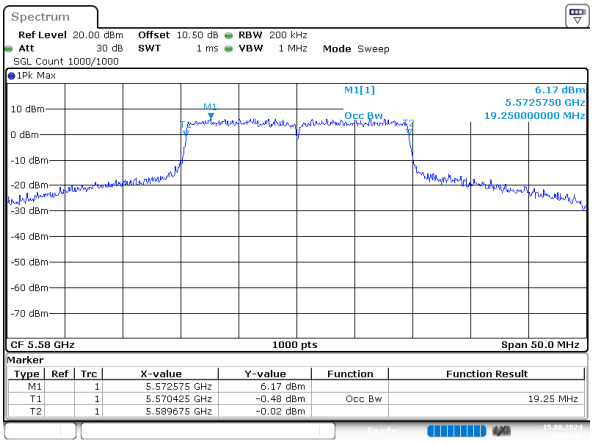

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:23:45

ax20_5700MHz_RU_242/61

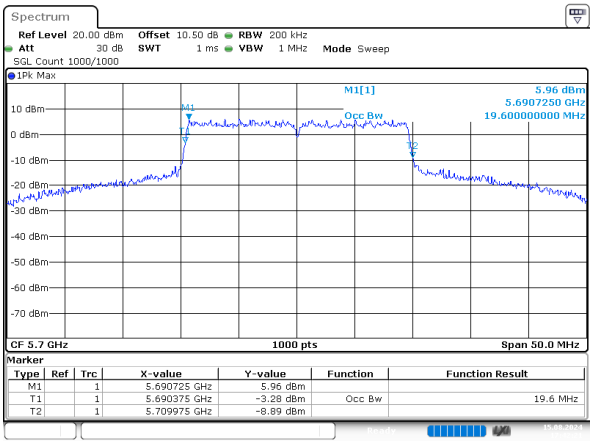

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:42:21

ax20_5720MHz_RU_242/61

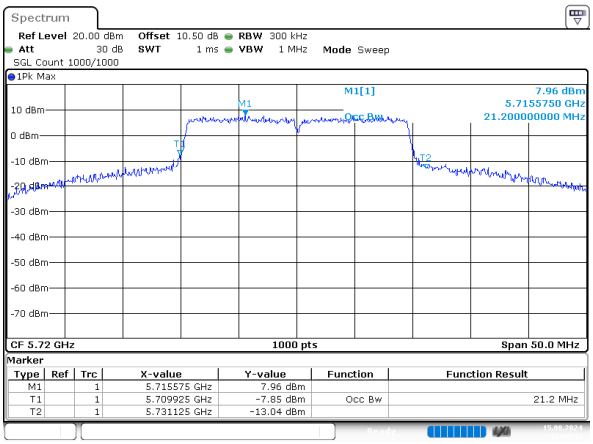

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 17:56:42

ax40_5510MHz_RU_484/65

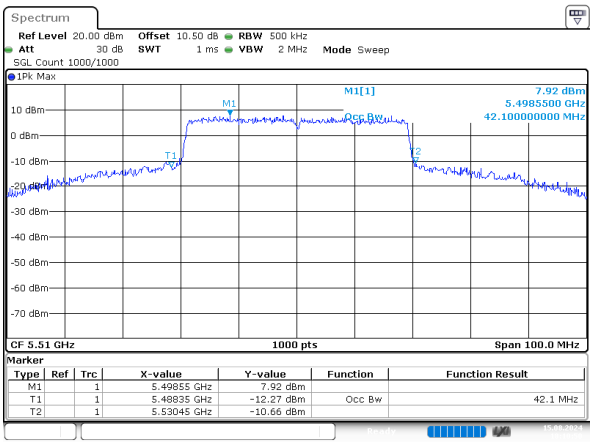

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 18:10:50

ax40_5550MHz_RU_484/65

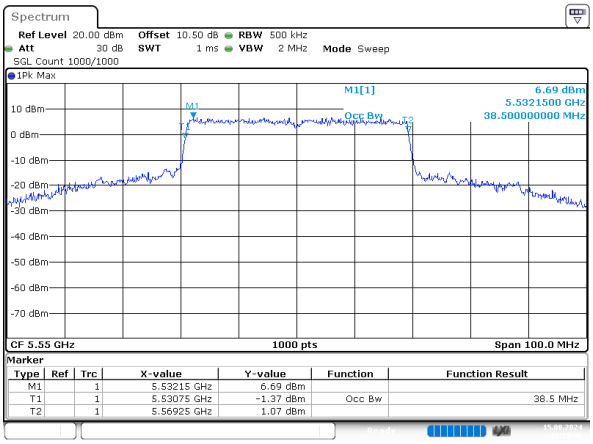

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 18:28:46

ax40_5670MHz_RU_484/65

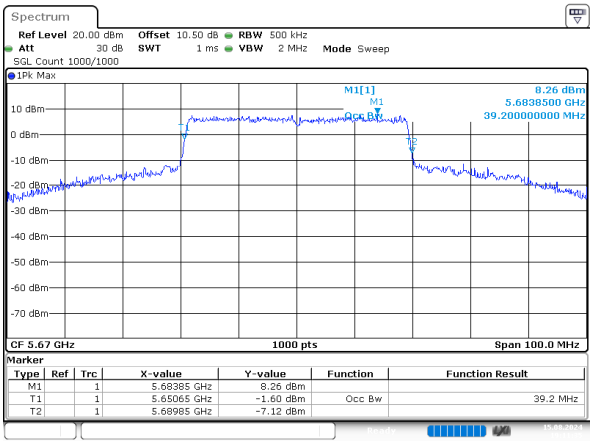

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 19:11:36

ax40_5710MHz_RU_484/65

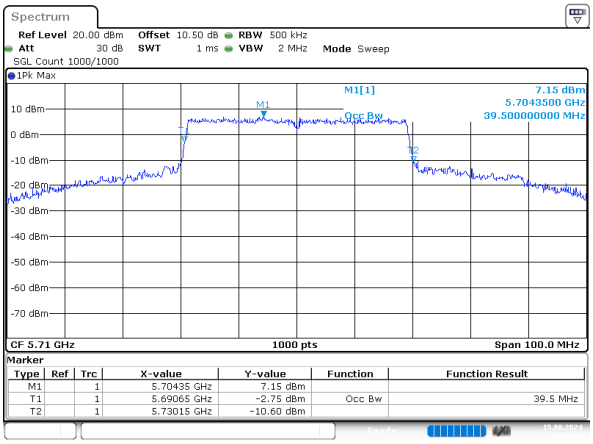

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 15.AUG.2024 19:22:16

ax80_5530MHz_RU_996/67

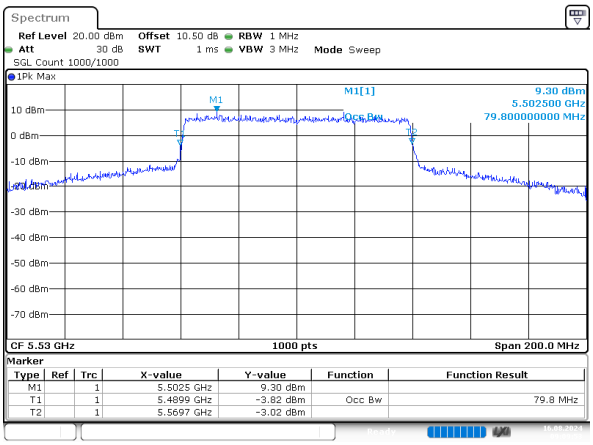

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:09:53

ax80_5610MHz_RU_996/67

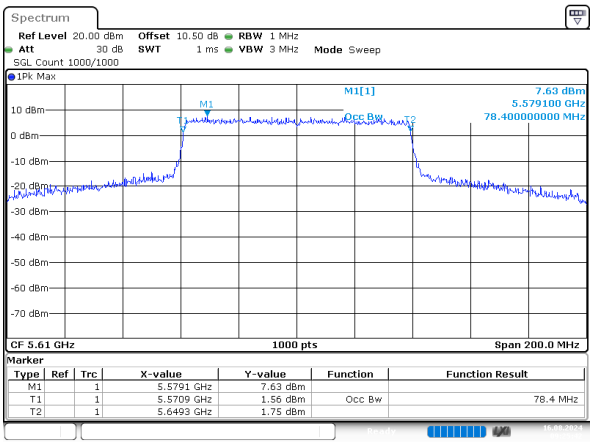

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:25:42

ax80_5690MHz_RU_996/67

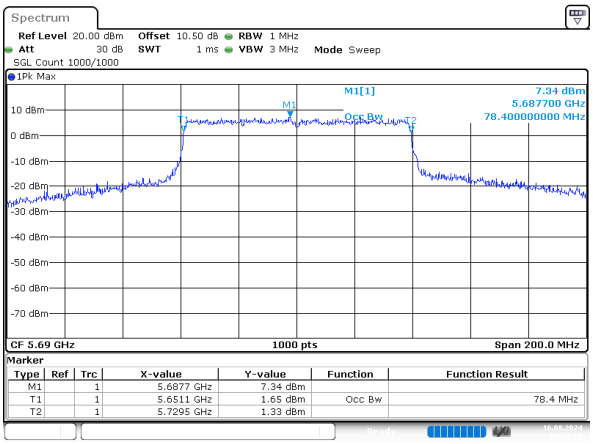

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 16.AUG.2024 09:51:10

5.5 Spot Check With Maximum Conducted Output Power

Serial No.:	2MQ4-1	**Test Date:**	2024/06/28~2024/08/16
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C):	25.6~26.8	**Relative Humidity: (%)**	48~56	**ATM Pressure: (kPa)**	99.8~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2023/09/04	2024/09/03
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Mode	Average Output Power (dBm)	FCC Conducted Limit (dBm)	EIRP (dBm)	RSS-247 EIRP Limit (dBm)
ax80_5210MHz_RU_26/0_Chain 0	1.42	24	5.12	23
ax80_5210MHz_RU_52/37_Chain 0	3.15	24	6.85	23
ax80_5210MHz_RU_106/53_Chain 0	5.31	24	9.01	23
ax80_5210MHz_RU_242/61_Chain 0	7.24	24	10.94	23
ax80_5210MHz_RU_484/65_Chain 0	10.33	24	14.03	23
ax80_5210MHz_RU_996/67_Chain 0	15.16	24	18.86	23
ax80_5210MHz_RU_26/0_Chain 1	1.32	24	5.02	23
ax80_5210MHz_RU_52/37_Chain 1	3.21	24	6.91	23
ax80_5210MHz_RU_106/53_Chain 1	5.35	24	9.05	23
ax80_5210MHz_RU_242/61_Chain 1	7.58	24	11.28	23
ax80_5210MHz_RU_484/65_Chain 1	10.31	24	14.01	23
ax80_5210MHz_RU_996/67_Chain 1	15.06	24	18.76	23
ax80_5210MHz_RU_26/0_Chain 0+Chain 1	4.38	24	8.08	23
ax80_5210MHz_RU_52/37_Chain 0+Chain 1	6.19	24	9.89	23
ax80_5210MHz_RU_106/53_Chain 0+Chain 1	8.34	24	12.04	23
ax80_5210MHz_RU_242/61_Chain 0+Chain 1	10.42	24	14.12	23
ax80_5210MHz_RU_484/65_Chain 0+Chain 1	13.33	24	17.03	23
ax80_5210MHz_RU_996/67_Chain 0+Chain 1	**18.12**	24	21.82	23

5725-5850 MHz

Mode	Average Output Power (dBm)	Limit (dBm)	Result
n40_5755MHz_Chain 0	14.76	30	Pass
n40_5755MHz_Chain 1	14.89	30	Pass
n40_5755MHz_Chain 0+Chain 1	17.84	30	Pass
n40_5795MHz_Chain 0	15.05	30	Pass
n40_5795MHz_Chain 1	14.88	30	Pass
n40_5795MHz_Chain 0+Chain 1	**17.98**	30	Pass

Note:
The Spot Check data were similar to the original data, so this report can reuse data.

5.6 Maximum Conducted Output Power

Serial No.:	2MQ4-1	**Test Date:**	2024/06/28~2024/08/16
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C):	25.6~26.8	**Relative Humidity: (%)**	48~56	**ATM Pressure: (kPa)**	99.8~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2023/09/04	2024/09/03
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM502	2024/06/07	2025/06/06

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5250-5350 MHz

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	RSS-247 Limit
a_5260MHz_Chain 0	13.37	24	23.24	17.07	29.24
a_5260MHz_Chain 1	13.11	24	23.24	16.81	29.24
a_5280MHz_Chain 0	13.43	24	23.24	17.13	29.24
a_5280MHz_Chain 1	13.27	24	23.24	16.97	29.24
a_5320MHz_Chain 0	13.89	24	23.23	17.59	29.23
a_5320MHz_Chain 1	13.59	24	23.23	17.29	29.23
n20_5260MHz_Chain 0	12.5	24	23.52	16.2	29.52
n20_5260MHz_Chain 1	12.16	24	23.52	15.86	29.52
n20_5260MHz_Chain 0+Chain 1	15.34	24	23.52	19.04	29.52
n20_5280MHz_Chain 0	12.47	24	23.52	16.17	29.52
n20_5280MHz_Chain 1	12.31	24	23.52	16.01	29.52
n20_5280MHz_Chain 0+Chain 1	15.4	24	23.52	19.1	29.52
n20_5320MHz_Chain 0	12.97	24	23.53	16.67	29.53
n20_5320MHz_Chain 1	12.92	24	23.53	16.62	29.53
n20_5320MHz_Chain 0+Chain 1	15.96	24	23.53	19.66	29.53
n40_5270MHz_Chain 0	11.49	24	23.98	15.19	30
n40_5270MHz_Chain 1	11.12	24	23.98	14.82	30
n40_5270MHz_Chain 0+Chain 1	14.32	24	23.98	18.02	30
n40_5310MHz_Chain 0	9.86	24	23.98	13.56	30
n40_5310MHz_Chain 1	9.79	24	23.98	13.49	30
n40_5310MHz_Chain 0+Chain 1	12.84	24	23.98	16.54	30
ac20_5260MHz_Chain 0	11.46	24	23.50	15.16	29.50
ac20_5260MHz_Chain 1	11.9	24	23.50	15.6	29.50
ac20_5260MHz_Chain 0+Chain 1	14.7	24	23.50	18.4	29.50
ac20_5280MHz_Chain 0	11.58	24	23.52	15.28	29.52
ac20_5280MHz_Chain 1	11.01	24	23.52	14.71	29.52
ac20_5280MHz_Chain 0+Chain 1	14.31	24	23.52	18.01	29.52
ac20_5320MHz_Chain 0	12.06	24	23.50	15.76	29.50
ac20_5320MHz_Chain 1	12.64	24	23.50	16.34	29.50
ac20_5320MHz_Chain 0+Chain 1	15.37	24	23.50	19.07	29.50
ac40_5270MHz_Chain 0	11.55	24	23.98	15.25	30
ac40_5270MHz_Chain 1	10.98	24	23.98	14.68	30
ac40_5270MHz_Chain 0+Chain 1	14.28	24	23.98	17.98	30
ac40_5310MHz_Chain 0	12.02	24	23.98	15.72	30
ac40_5310MHz_Chain 1	12.43	24	23.98	16.13	30
ac40_5310MHz_Chain 0+Chain 1	15.24	24	23.98	18.94	30
ac80_5290MHz_Chain 0	8.76	24	23.98	12.46	30
ac80_5290MHz_Chain 1	8.51	24	23.98	12.21	30
ac80_5290MHz_Chain 0+Chain 1	11.65	24	23.98	15.35	30
ax20_5260MHz_RU_26/0_Chain 0	7.85	24	23.84	11.55	29.84
ax20_5260MHz_RU_52/37_Chain 0	9.83	24	23.84	13.53	29.84
ax20_5260MHz_RU_106/53_Chain 0	11.72	24	23.84	15.42	29.84
ax20_5260MHz_RU_242/61_Chain 0	13.42	24	23.84	17.12	29.84
ax20_5260MHz_RU_26/0_Chain 1	6.19	24	23.84	9.89	29.84
ax20_5260MHz_RU_52/37_Chain 1	8.35	24	23.84	12.05	29.84
ax20_5260MHz_RU_106/53_Chain 1	10.14	24	23.84	13.84	29.84
ax20_5260MHz_RU_242/61_Chain 1	13.12	24	23.84	16.82	29.84
ax20_5260MHz_RU_26/0_Chain 0+Chain 1	10.11	24	23.84	13.81	29.84
ax20_5260MHz_RU_52/37_Chain 0+Chain 1	12.16	24	23.84	15.86	29.84
ax20_5260MHz_RU_106/53_Chain 0+Chain 1	14.01	24	23.84	17.71	29.84
ax20_5260MHz_RU_242/61_Chain 0+Chain 1	16.28	24	23.84	19.98	29.84
ax20_5280MHz_RU_26/0_Chain 0	7.47	24	23.84	11.17	29.84
ax20_5280MHz_RU_52/37_Chain 0	9.5	24	23.84	13.2	29.84
ax20_5280MHz_RU_106/53_Chain 0	11.27	24	23.84	14.97	29.84
ax20_5280MHz_RU_242/61_Chain 0	14.02	24	23.84	17.72	29.84
ax20_5280MHz_RU_26/0_Chain 1	6.02	24	23.84	9.72	29.84
ax20_5280MHz_RU_52/37_Chain 1	8.1	24	23.84	11.8	29.84
ax20_5280MHz_RU_106/53_Chain 1	9.94	24	23.84	13.64	29.84

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	RSS-247 Limit
ax20_5280MHz_RU_242/61_Chain 1	13.25	24	23.84	16.95	29.84
ax20_5280MHz_RU_26/0_Chain 0+Chain 1	9.82	24	23.84	13.52	29.84
ax20_5280MHz_RU_52/37_Chain 0+Chain 1	11.87	24	23.84	15.57	29.84
ax20_5280MHz_RU_106/53_Chain 0+Chain 1	13.67	24	23.84	17.37	29.84
ax20_5280MHz_RU_242/61_Chain 0+Chain 1	16.66	24	23.84	20.36	29.84
ax20_5320MHz_RU_26/8_Chain 0	6.01	24	23.81	9.71	29.81
ax20_5320MHz_RU_52/40_Chain 0	7.88	24	23.81	11.58	29.81
ax20_5320MHz_RU_106/54_Chain 0	9.72	24	23.81	13.42	29.81
ax20_5320MHz_RU_242/61_Chain 0	13.67	24	23.81	17.37	29.81
ax20_5320MHz_RU_26/8_Chain 1	6.41	24	23.81	10.11	29.81
ax20_5320MHz_RU_52/40_Chain 1	8.35	24	23.81	12.05	29.81
ax20_5320MHz_RU_106/54_Chain 1	10.16	24	23.81	13.86	29.81
ax20_5320MHz_RU_242/61_Chain 1	13.39	24	23.81	17.09	29.81
ax20_5320MHz_RU_26/8_Chain 0+Chain 1	9.22	24	23.81	12.92	29.81
ax20_5320MHz_RU_52/40_Chain 0+Chain 1	11.13	24	23.81	14.83	29.81
ax20_5320MHz_RU_106/54_Chain 0+Chain 1	12.96	24	23.81	16.66	29.81
ax20_5320MHz_RU_242/61_Chain 0+Chain 1	16.54	24	23.81	20.24	29.81
ax40_5270MHz_RU_26/0_Chain 0	4.83	24	23.98	8.53	30
ax40_5270MHz_RU_52/37_Chain 0	6.54	24	23.98	10.24	30
ax40_5270MHz_RU_106/53_Chain 0	8.41	24	23.98	12.11	30
ax40_5270MHz_RU_242/61_Chain 0	9.4	24	23.98	13.1	30
ax40_5270MHz_RU_484/65_Chain 0	14.29	24	23.98	17.99	30
ax40_5270MHz_RU_26/0_Chain 1	4.77	24	23.98	8.47	30
ax40_5270MHz_RU_52/37_Chain 1	6.35	24	23.98	10.05	30
ax40_5270MHz_RU_106/53_Chain 1	8.43	24	23.98	12.13	30
ax40_5270MHz_RU_242/61_Chain 1	10.34	24	23.98	14.04	30
ax40_5270MHz_RU_484/65_Chain 1	14.58	24	23.98	18.28	30
ax40_5270MHz_RU_26/0_Chain 0+Chain 1	7.81	24	23.98	11.51	30
ax40_5270MHz_RU_52/37_Chain 0+Chain 1	9.46	24	23.98	13.16	30
ax40_5270MHz_RU_106/53_Chain 0+Chain 1	11.43	24	23.98	15.13	30
ax40_5270MHz_RU_242/61_Chain 0+Chain 1	12.91	24	23.98	16.61	30
ax40_5270MHz_RU_484/65_Chain 0+Chain 1	17.45	24	23.98	21.15	30
ax40_5310MHz_RU_26/17_Chain 0	4.28	24	23.98	7.98	30
ax40_5310MHz_RU_52/44_Chain 0	5.95	24	23.98	9.65	30
ax40_5310MHz_RU_106/56_Chain 0	7.87	24	23.98	11.57	30
ax40_5310MHz_RU_242/62_Chain 0	10.77	24	23.98	14.47	30
ax40_5310MHz_RU_484/65_Chain 0	14.42	24	23.98	18.12	30
ax40_5310MHz_RU_26/17_Chain 1	4.82	24	23.98	8.52	30
ax40_5310MHz_RU_52/44_Chain 1	6.2	24	23.98	9.9	30
ax40_5310MHz_RU_106/56_Chain 1	8.35	24	23.98	12.05	30
ax40_5310MHz_RU_242/62_Chain 1	10.25	24	23.98	13.95	30
ax40_5310MHz_RU_484/65_Chain 1	14.61	24	23.98	18.31	30
ax40_5310MHz_RU_26/17_Chain 0+Chain 1	7.57	24	23.98	11.27	30
ax40_5310MHz_RU_52/44_Chain 0+Chain 1	9.09	24	23.98	12.79	30
ax40_5310MHz_RU_106/56_Chain 0+Chain 1	11.13	24	23.98	14.83	30
ax40_5310MHz_RU_242/62_Chain 0+Chain 1	13.53	24	23.98	17.23	30
ax40_5310MHz_RU_484/65_Chain 0+Chain 1	**17.53**	24	23.98	**21.23**	30
ax80_5290MHz_RU_26/0_Chain 0	2.13	24	23.98	5.83	30
ax80_5290MHz_RU_52/37_Chain 0	4.11	24	23.98	7.81	30
ax80_5290MHz_RU_106/53_Chain 0	6.07	24	23.98	9.77	30
ax80_5290MHz_RU_242/61_Chain 0	9.03	24	23.98	12.73	30
ax80_5290MHz_RU_484/65_Chain 0	11.09	24	23.98	14.79	30
ax80_5290MHz_RU_996/67_Chain 0	12.61	24	23.98	16.31	30
ax80_5290MHz_RU_26/0_Chain 1	1.91	24	23.98	5.61	30
ax80_5290MHz_RU_52/37_Chain 1	3.1	24	23.98	6.8	30
ax80_5290MHz_RU_106/53_Chain 1	5.34	24	23.98	9.04	30
ax80_5290MHz_RU_242/61_Chain 1	8.01	24	23.98	11.71	30
ax80_5290MHz_RU_484/65_Chain 1	10.15	24	23.98	13.85	30
ax80_5290MHz_RU_996/67_Chain 1	12.44	24	23.98	16.14	30
ax80_5290MHz_RU_26/0_Chain 0+Chain 1	5.03	24	23.98	8.73	30

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	RSS-247 Limit
ax80_5290MHz_RU_52/37_Chain 0+Chain 1	6.64	24	23.98	10.34	30
ax80_5290MHz_RU_106/53_Chain 0+Chain 1	8.73	24	23.98	12.43	30
ax80_5290MHz_RU_242/61_Chain 0+Chain 1	11.56	24	23.98	15.26	30
ax80_5290MHz_RU_484/65_Chain 0+Chain 1	13.66	24	23.98	17.36	30
ax80_5290MHz_RU_996/67_Chain 0+Chain 1	15.54	24	23.98	19.24	30

5470-5725 MHz

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	Result
a_5500MHz_Chain 0	14.27	24	23.25	17.97	29.25
a_5500MHz_Chain 1	14.88	24	23.25	18.58	29.25
a_5580MHz_Chain 0	14.23	24	23.25	17.93	29.25
a_5580MHz_Chain 1	14.69	24	23.25	18.39	29.25
a_5700MHz_Chain 0	14.08	24	23.23	17.78	29.23
a_5700MHz_Chain 1	14.63	24	23.23	18.33	29.23
a_5720MHz_Chain 0	14.12	24	23.23	17.82	29.23
a_5720MHz_Chain 1	13.42	24	23.23	17.12	29.23
n20_5500MHz_Chain 0	14.39	24	23.55	18.09	29.55
n20_5500MHz_Chain 1	14.65	24	23.55	18.35	29.55
n20_5500MHz_Chain 0+Chain 1	17.53	24	23.55	21.23	29.55
n20_5580MHz_Chain 0	14.39	24	23.55	18.09	29.55
n20_5580MHz_Chain 1	14.73	24	23.55	18.43	29.55
n20_5580MHz_Chain 0+Chain 1	17.57	24	23.55	21.27	29.55
n20_5700MHz_Chain 0	10.15	24	23.50	13.85	29.50
n20_5700MHz_Chain 1	9.79	24	23.50	13.49	29.50
n20_5700MHz_Chain 0+Chain 1	12.98	24	23.50	16.68	29.50
n20_5720MHz_Chain 0	10.23	24	23.50	13.93	29.50
n20_5720MHz_Chain 1	9.66	24	23.50	13.36	29.50
n20_5720MHz_Chain 0+Chain 1	12.96	24	23.50	16.66	29.50
n40_5510MHz_Chain 0	11.53	24	23.98	15.23	30
n40_5510MHz_Chain 1	11.01	24	23.98	14.71	30
n40_5510MHz_Chain 0+Chain 1	14.29	24	23.98	17.99	30
n40_5550MHz_Chain 0	10.6	24	23.98	14.3	30
n40_5550MHz_Chain 1	10.2	24	23.98	13.9	30
n40_5550MHz_Chain 0+Chain 1	13.41	24	23.98	17.11	30
n40_5670MHz_Chain 0	9.8	24	23.98	13.5	30
n40_5670MHz_Chain 1	9.97	24	23.98	13.67	30
n40_5670MHz_Chain 0+Chain 1	12.90	24	23.98	16.6	30
n40_5710MHz_Chain 0	10.13	24	23.98	13.83	30
n40_5710MHz_Chain 1	9.86	24	23.98	13.56	30
n40_5710MHz_Chain 0+Chain 1	13.01	24	23.98	16.71	30
ac20_5500MHz_Chain 0	10.3	24	23.49	14	29.49
ac20_5500MHz_Chain 1	9.07	24	23.49	12.77	29.49
ac20_5500MHz_Chain 0+Chain 1	12.74	24	23.49	16.44	29.49
ac20_5580MHz_Chain 0	10.04	24	23.49	13.74	29.49
ac20_5580MHz_Chain 1	10.07	24	23.49	13.77	29.49
ac20_5580MHz_Chain 0+Chain 1	13.07	24	23.49	16.77	29.49
ac20_5700MHz_Chain 0	10.03	24	23.50	13.73	29.50
ac20_5700MHz_Chain 1	9.88	24	23.50	13.58	29.50
ac20_5700MHz_Chain 0+Chain 1	12.97	24	23.50	16.67	29.50
ac20_5720MHz_Chain 0	10.01	24	23.49	13.71	29.49
ac20_5720MHz_Chain 1	9.65	24	23.49	13.35	29.49
ac20_5720MHz_Chain 0+Chain 1	12.84	24	23.49	16.54	29.49
ac40_5510MHz_Chain 0	10.31	24	23.98	14.01	30
ac40_5510MHz_Chain 1	10.19	24	23.98	13.89	30
ac40_5510MHz_Chain 0+Chain 1	13.26	24	23.98	16.96	30
ac40_5550MHz_Chain 0	10.48	24	23.98	14.18	30
ac40_5550MHz_Chain 1	10.38	24	23.98	14.08	30
ac40_5550MHz_Chain 0+Chain 1	13.44	24	23.98	17.14	30
ac40_5670MHz_Chain 0	9.76	24	23.98	13.46	30
ac40_5670MHz_Chain 1	9.98	24	23.98	13.68	30
ac40_5670MHz_Chain 0+Chain 1	12.88	24	23.98	16.58	30
ac40_5710MHz_Chain 0	10.08	24	23.98	13.78	30
ac40_5710MHz_Chain 1	9.86	24	23.98	13.56	30
ac40_5710MHz_Chain 0+Chain 1	12.98	24	23.98	16.68	30
ac80_5530MHz_Chain 0	9.36	24	23.98	13.06	30
ac80_5530MHz_Chain 1	9.37	24	23.98	13.07	30

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	Result
ac80_5530MHz_Chain 0+Chain 1	12.39	24	23.98	16.09	30
ac80_5610MHz_Chain 0	9.78	24	23.98	13.48	30
ac80_5610MHz_Chain 1	9.58	24	23.98	13.28	30
ac80_5610MHz_Chain 0+Chain 1	12.69	24	23.98	16.39	30
ac80_5690MHz_Chain 0	9.2	24	23.98	12.9	30
ac80_5690MHz_Chain 1	8.93	24	23.98	12.63	30
ac80_5690MHz_Chain 0+Chain 1	12.08	24	23.98	15.78	30
ax20_5500MHz_RU_26/0_Chain 0	8.22	24	23.98	11.92	30
ax20_5500MHz_RU_52/37_Chain 0	10.16	24	23.98	13.86	30
ax20_5500MHz_RU_106/53_Chain 0	12.35	24	23.98	16.05	30
ax20_5500MHz_RU_242/61_Chain 0	13.44	24	23.98	17.14	30
ax20_5500MHz_RU_26/0_Chain 1	8.53	24	23.98	12.23	30
ax20_5500MHz_RU_52/37_Chain 1	9.37	24	23.98	13.07	30
ax20_5500MHz_RU_106/53_Chain 1	11.09	24	23.98	14.79	30
ax20_5500MHz_RU_242/61_Chain 1	13.32	24	23.98	17.02	30
ax20_5500MHz_RU_26/0_Chain 0+Chain 1	11.39	24	23.98	15.09	30
ax20_5500MHz_RU_52/37_Chain 0+Chain 1	12.79	24	23.98	16.49	30
ax20_5500MHz_RU_106/53_Chain 0+Chain 1	14.78	24	23.98	18.48	30
ax20_5500MHz_RU_242/61_Chain 0+Chain 1	16.39	24	23.98	20.09	30
ax20_5580MHz_RU_26/0_Chain 0	8.86	24	23.84	12.56	29.84
ax20_5580MHz_RU_52/37_Chain 0	9.61	24	23.84	13.31	29.84
ax20_5580MHz_RU_106/53_Chain 0	11.64	24	23.84	15.34	29.84
ax20_5580MHz_RU_242/61_Chain 0	13.32	24	23.84	17.02	29.84
ax20_5580MHz_RU_26/0_Chain 1	8.87	24	23.84	12.57	29.84
ax20_5580MHz_RU_52/37_Chain 1	10.91	24	23.84	14.61	29.84
ax20_5580MHz_RU_106/53_Chain 1	12.85	24	23.84	16.55	29.84
ax20_5580MHz_RU_242/61_Chain 1	14.09	24	23.84	17.79	29.84
ax20_5580MHz_RU_26/0_Chain 0+Chain 1	11.88	24	23.84	15.58	29.84
ax20_5580MHz_RU_52/37_Chain 0+Chain 1	13.32	24	23.84	17.02	29.84
ax20_5580MHz_RU_106/53_Chain 0+Chain 1	15.30	24	23.84	19	29.84
ax20_5580MHz_RU_242/61_Chain 0+Chain 1	16.73	24	23.84	20.43	29.84
ax20_5700MHz_RU_26/8_Chain 0	8.6	24	23.92	12.3	29.92
ax20_5700MHz_RU_52/40_Chain 0	9.49	24	23.92	13.19	29.92
ax20_5700MHz_RU_106/54_Chain 0	11.42	24	23.92	15.12	29.92
ax20_5700MHz_RU_242/61_Chain 0	13.6	24	23.92	17.3	29.92
ax20_5700MHz_RU_26/8_Chain 1	9.18	24	23.92	12.88	29.92
ax20_5700MHz_RU_52/40_Chain 1	10.31	24	23.92	14.01	29.92
ax20_5700MHz_RU_106/54_Chain 1	12.28	24	23.92	15.98	29.92
ax20_5700MHz_RU_242/61_Chain 1	12.34	24	23.92	16.04	29.92
ax20_5700MHz_RU_26/8_Chain 0+Chain 1	11.91	24	23.92	15.61	29.92
ax20_5700MHz_RU_52/40_Chain 0+Chain 1	12.93	24	23.92	16.63	29.92
ax20_5700MHz_RU_106/54_Chain 0+Chain 1	14.88	24	23.92	18.58	29.92
ax20_5700MHz_RU_242/61_Chain 0+Chain 1	16.03	24	23.92	19.73	29.92
ax20_5720MHz_RU_26/8_Chain 0	9.53	24	23.98	13.23	30
ax20_5720MHz_RU_52/40_Chain 0	11.53	24	23.98	15.23	30
ax20_5720MHz_RU_106/54_Chain 0	11.52	24	23.98	15.22	30
ax20_5720MHz_RU_242/61_Chain 0	13.62	24	23.98	17.32	30
ax20_5720MHz_RU_26/8_Chain 1	7.77	24	23.98	11.47	30
ax20_5720MHz_RU_52/40_Chain 1	11.97	24	23.98	15.67	30
ax20_5720MHz_RU_106/54_Chain 1	11.95	24	23.98	15.65	30
ax20_5720MHz_RU_242/61_Chain 1	13.15	24	23.98	16.85	30
ax20_5720MHz_RU_26/8_Chain 0+Chain 1	11.75	24	23.98	15.45	30
ax20_5720MHz_RU_52/40_Chain 0+Chain 1	14.77	24	23.98	18.47	30
ax20_5720MHz_RU_106/54_Chain 0+Chain 1	14.75	24	23.98	18.45	30
ax20_5720MHz_RU_242/61_Chain 0+Chain 1	16.40	24	23.98	20.1	30
ax40_5510MHz_RU_26/0_Chain 0	4.47	24	23.98	8.17	30
ax40_5510MHz_RU_52/37_Chain 0	6.31	24	23.98	10.01	30
ax40_5510MHz_RU_106/53_Chain 0	8.26	24	23.98	11.96	30
ax40_5510MHz_RU_242/61_Chain 0	10.18	24	23.98	13.88	30
ax40_5510MHz_RU_484/65_Chain 0	13.66	24	23.98	17.36	30

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	Result
ax40_5510MHz_RU_26/0_Chain 1	4.81	24	23.98	8.51	30
ax40_5510MHz_RU_52/37_Chain 1	6.47	24	23.98	10.17	30
ax40_5510MHz_RU_106/53_Chain 1	8.13	24	23.98	11.83	30
ax40_5510MHz_RU_242/61_Chain 1	10.31	24	23.98	14.01	30
ax40_5510MHz_RU_484/65_Chain 1	12.72	24	23.98	16.42	30
ax40_5510MHz_RU_26/0_Chain 0+Chain 1	7.65	24	23.98	11.35	30
ax40_5510MHz_RU_52/37_Chain 0+Chain 1	9.40	24	23.98	13.1	30
ax40_5510MHz_RU_106/53_Chain 0+Chain 1	11.21	24	23.98	14.91	30
ax40_5510MHz_RU_242/61_Chain 0+Chain 1	13.26	24	23.98	16.96	30
ax40_5510MHz_RU_484/65_Chain 0+Chain 1	16.23	24	23.98	19.93	30
ax40_5550MHz_RU_26/0_Chain 0	5.34	24	23.98	9.04	30
ax40_5550MHz_RU_52/37_Chain 0	6.17	24	23.98	9.87	30
ax40_5550MHz_RU_106/53_Chain 0	8.17	24	23.98	11.87	30
ax40_5550MHz_RU_242/61_Chain 0	11.09	24	23.98	14.79	30
ax40_5550MHz_RU_484/65_Chain 0	15.14	24	23.98	18.84	30
ax40_5550MHz_RU_26/0_Chain 1	4.54	24	23.98	8.24	30
ax40_5550MHz_RU_52/37_Chain 1	6.18	24	23.98	9.88	30
ax40_5550MHz_RU_106/53_Chain 1	8.34	24	23.98	12.04	30
ax40_5550MHz_RU_242/61_Chain 1	10.24	24	23.98	13.94	30
ax40_5550MHz_RU_484/65_Chain 1	12.56	24	23.98	16.26	30
ax40_5550MHz_RU_26/0_Chain 0+Chain 1	7.97	24	23.98	11.67	30
ax40_5550MHz_RU_52/37_Chain 0+Chain 1	9.19	24	23.98	12.89	30
ax40_5550MHz_RU_106/53_Chain 0+Chain 1	11.27	24	23.98	14.97	30
ax40_5550MHz_RU_242/61_Chain 0+Chain 1	13.70	24	23.98	17.4	30
ax40_5550MHz_RU_484/65_Chain 0+Chain 1	**17.05**	24	23.98	**20.75**	30
ax40_5670MHz_RU_26/17_Chain 0	6.12	24	23.98	9.82	30
ax40_5670MHz_RU_52/44_Chain 0	7.2	24	23.98	10.9	30
ax40_5670MHz_RU_106/56_Chain 0	9.03	24	23.98	12.73	30
ax40_5670MHz_RU_242/62_Chain 0	12.15	24	23.98	15.85	30
ax40_5670MHz_RU_484/65_Chain 0	13.79	24	23.98	17.49	30
ax40_5670MHz_RU_26/17_Chain 1	4.5	24	23.98	8.2	30
ax40_5670MHz_RU_52/44_Chain 1	6.06	24	23.98	9.76	30
ax40_5670MHz_RU_106/56_Chain 1	7.81	24	23.98	11.51	30
ax40_5670MHz_RU_242/62_Chain 1	10.76	24	23.98	14.46	30
ax40_5670MHz_RU_484/65_Chain 1	13.25	24	23.98	16.95	30
ax40_5670MHz_RU_26/17_Chain 0+Chain 1	8.40	24	23.98	12.1	30
ax40_5670MHz_RU_52/44_Chain 0+Chain 1	9.68	24	23.98	13.38	30
ax40_5670MHz_RU_106/56_Chain 0+Chain 1	11.47	24	23.98	15.17	30
ax40_5670MHz_RU_242/62_Chain 0+Chain 1	14.52	24	23.98	18.22	30
ax40_5670MHz_RU_484/65_Chain 0+Chain 1	16.54	24	23.98	20.24	30
ax40_5710MHz_RU_26/17_Chain 0	5.49	24	23.98	9.19	30
ax40_5710MHz_RU_52/44_Chain 0	6.61	24	23.98	10.31	30
ax40_5710MHz_RU_106/56_Chain 0	8.58	24	23.98	12.28	30
ax40_5710MHz_RU_242/62_Chain 0	11.52	24	23.98	15.22	30
ax40_5710MHz_RU_484/65_Chain 0	13.28	24	23.98	16.98	30
ax40_5710MHz_RU_26/17_Chain 1	5.74	24	23.98	9.44	30
ax40_5710MHz_RU_52/44_Chain 1	6.53	24	23.98	10.23	30
ax40_5710MHz_RU_106/56_Chain 1	8.6	24	23.98	12.3	30
ax40_5710MHz_RU_242/62_Chain 1	11.47	24	23.98	15.17	30
ax40_5710MHz_RU_484/65_Chain 1	12.94	24	23.98	16.64	30
ax40_5710MHz_RU_26/17_Chain 0+Chain 1	8.63	24	23.98	12.33	30
ax40_5710MHz_RU_52/44_Chain 0+Chain 1	9.58	24	23.98	13.28	30
ax40_5710MHz_RU_106/56_Chain 0+Chain 1	11.60	24	23.98	15.3	30
ax40_5710MHz_RU_242/62_Chain 0+Chain 1	14.51	24	23.98	18.21	30
ax40_5710MHz_RU_484/65_Chain 0+Chain 1	16.12	24	23.98	19.82	30
ax80_5530MHz_RU_26/0_Chain 0	2.33	24	23.98	6.03	30
ax80_5530MHz_RU_52/37_Chain 0	3.27	24	23.98	6.97	30
ax80_5530MHz_RU_106/53_Chain 0	5.18	24	23.98	8.88	30
ax80_5530MHz_RU_242/61_Chain 0	8.16	24	23.98	11.86	30
ax80_5530MHz_RU_484/65_Chain 0	11.11	24	23.98	14.81	30

Mode	Average Output Power (dBm)	FCC Limit (dBm)	RSS-247 Limit (dBm)	Max. EIRP (dBm)	
				Result	Result
ax80_5530MHz_RU_996/67_Chain 0	13.52	24	23.98	17.22	30
ax80_5530MHz_RU_26/0_Chain 1	2.11	24	23.98	5.81	30
ax80_5530MHz_RU_52/37_Chain 1	3.28	24	23.98	6.98	30
ax80_5530MHz_RU_106/53_Chain 1	5.32	24	23.98	9.02	30
ax80_5530MHz_RU_242/61_Chain 1	7.38	24	23.98	11.08	30
ax80_5530MHz_RU_484/65_Chain 1	10.39	24	23.98	14.09	30
ax80_5530MHz_RU_996/67_Chain 1	12.58	24	23.98	16.28	30
ax80_5530MHz_RU_26/0_Chain 0+Chain 1	5.23	24	23.98	8.93	30
ax80_5530MHz_RU_52/37_Chain 0+Chain 1	6.29	24	23.98	9.99	30
ax80_5530MHz_RU_106/53_Chain 0+Chain 1	8.26	24	23.98	11.96	30
ax80_5530MHz_RU_242/61_Chain 0+Chain 1	10.80	24	23.98	14.5	30
ax80_5530MHz_RU_484/65_Chain 0+Chain 1	13.78	24	23.98	17.48	30
ax80_5530MHz_RU_996/67_Chain 0+Chain 1	16.09	24	23.98	19.79	30
ax80_5610MHz_RU_26/0_Chain 0	2.98	24	23.98	6.68	30
ax80_5610MHz_RU_52/37_Chain 0	3.87	24	23.98	7.57	30
ax80_5610MHz_RU_106/53_Chain 0	5.89	24	23.98	9.59	30
ax80_5610MHz_RU_242/61_Chain 0	8.8	24	23.98	12.5	30
ax80_5610MHz_RU_484/65_Chain 0	10.96	24	23.98	14.66	30
ax80_5610MHz_RU_996/67_Chain 0	13.32	24	23.98	17.02	30
ax80_5610MHz_RU_26/0_Chain 1	2.06	24	23.98	5.76	30
ax80_5610MHz_RU_52/37_Chain 1	2.26	24	23.98	5.96	30
ax80_5610MHz_RU_106/53_Chain 1	4.81	24	23.98	8.51	30
ax80_5610MHz_RU_242/61_Chain 1	7.52	24	23.98	11.22	30
ax80_5610MHz_RU_484/65_Chain 1	10.59	24	23.98	14.29	30
ax80_5610MHz_RU_996/67_Chain 1	12.62	24	23.98	16.32	30
ax80_5610MHz_RU_26/0_Chain 0+Chain 1	5.55	24	23.98	9.25	30
ax80_5610MHz_RU_52/37_Chain 0+Chain 1	6.15	24	23.98	9.85	30
ax80_5610MHz_RU_106/53_Chain 0+Chain 1	8.39	24	23.98	12.09	30
ax80_5610MHz_RU_242/61_Chain 0+Chain 1	11.22	24	23.98	14.92	30
ax80_5610MHz_RU_484/65_Chain 0+Chain 1	13.79	24	23.98	17.49	30
ax80_5610MHz_RU_996/67_Chain 0+Chain 1	15.99	24	23.98	19.69	30
ax80_5690MHz_RU_26/36_Chain 0	2.48	24	23.98	6.18	30
ax80_5690MHz_RU_52/52_Chain 0	4.37	24	23.98	8.07	30
ax80_5690MHz_RU_106/60_Chain 0	6.39	24	23.98	10.09	30
ax80_5690MHz_RU_242/64_Chain 0	9.45	24	23.98	13.15	30
ax80_5690MHz_RU_484/66_Chain 0	11.58	24	23.98	15.28	30
ax80_5690MHz_RU_996/67_Chain 0	13.08	24	23.98	16.78	30
ax80_5690MHz_RU_26/36_Chain 1	2.05	24	23.98	5.75	30
ax80_5690MHz_RU_52/52_Chain 1	3.07	24	23.98	6.77	30
ax80_5690MHz_RU_106/60_Chain 1	4.93	24	23.98	8.63	30
ax80_5690MHz_RU_242/64_Chain 1	7.99	24	23.98	11.69	30
ax80_5690MHz_RU_484/66_Chain 1	11.0	24	23.98	14.7	30
ax80_5690MHz_RU_996/67_Chain 1	12.18	24	23.98	15.88	30
ax80_5690MHz_RU_26/36_Chain 0+Chain 1	5.28	24	23.98	8.98	30
ax80_5690MHz_RU_52/52_Chain 0+Chain 1	6.78	24	23.98	10.48	30
ax80_5690MHz_RU_106/60_Chain 0+Chain 1	8.73	24	23.98	12.43	30
ax80_5690MHz_RU_242/64_Chain 0+Chain 1	11.79	24	23.98	15.49	30
ax80_5690MHz_RU_484/66_Chain 0+Chain 1	14.31	24	23.98	18.01	30
ax80_5690MHz_RU_996/67_Chain 0+Chain 1	15.66	24	23.98	19.36	30

5.7 Maximum power spectral density

Serial No.:	2MQ4-1	**Test Date:**	2024/07/01~2024/08/15
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C):	25.6~26.8	**Relative Humidity: (%)**	48~56	**ATM Pressure: (kPa)**	99.8~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023/10/18	2024/10/17
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/06/07	2025/06/06
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM502	2024/06/07	2025/06/06

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5250-5350 MHz

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
a_5260MHz_Chain 0	4.94	0.18	5.12	11
a_5260MHz_Chain 1	5.17	0.18	5.35	11
a_5280MHz_Chain 0	4.75	0.18	4.93	11
a_5280MHz_Chain 1	4.96	0.18	5.14	11
a_5320MHz_Chain 0	5.09	0.18	5.27	11
a_5320MHz_Chain 1	4.99	0.18	5.17	11
n20_5260MHz_Chain 0	3.02	0.95	3.97	11
n20_5260MHz_Chain 1	2.98	0.95	3.93	11
n20_5260MHz_Chain 0+Chain 1	6.01	0.95	6.96	10.3
n20_5280MHz_Chain 0	2.88	0.95	3.83	11
n20_5280MHz_Chain 1	2.97	0.95	3.92	11
n20_5280MHz_Chain 0+Chain 1	5.94	0.95	6.89	10.3
n20_5320MHz_Chain 0	2.85	0.95	3.80	11
n20_5320MHz_Chain 1	3.32	0.95	4.27	11
n20_5320MHz_Chain 0+Chain 1	6.10	0.95	7.05	10.3
n40_5270MHz_Chain 0	-0.18	0.96	0.78	11
n40_5270MHz_Chain 1	-0.30	0.96	0.66	11
n40_5270MHz_Chain 0+Chain 1	2.77	0.96	3.73	10.3
n40_5310MHz_Chain 0	-2.16	0.96	-1.20	11
n40_5310MHz_Chain 1	-2.10	0.96	-1.14	11
n40_5310MHz_Chain 0+Chain 1	0.88	0.96	1.84	10.3
ac20_5260MHz_Chain 0	2.93	0.96	3.89	11
ac20_5260MHz_Chain 1	3.18	0.96	4.14	11
ac20_5260MHz_Chain 0+Chain 1	6.07	0.96	7.03	10.3
ac20_5280MHz_Chain 0	2.87	0.96	3.83	11
ac20_5280MHz_Chain 1	3.00	0.96	3.96	11
ac20_5280MHz_Chain 0+Chain 1	5.95	0.96	6.91	10.3

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
ac20_5320MHz_Chain 0	3.33	0.96	4.29	11
ac20_5320MHz_Chain 1	3.42	0.96	4.38	11
ac20_5320MHz_Chain 0+Chain 1	6.39	0.96	7.35	10.3
ac40_5270MHz_Chain 0	-0.02	0.97	0.95	11
ac40_5270MHz_Chain 1	0.12	0.97	1.09	11
ac40_5270MHz_Chain 0+Chain 1	3.06	0.97	4.03	10.3
ac40_5310MHz_Chain 0	0.43	0.97	1.40	11
ac40_5310MHz_Chain 1	0.04	0.97	1.01	11
ac40_5310MHz_Chain 0+Chain 1	3.25	0.97	4.22	10.3
ac80_5290MHz_Chain 0	-6.28	0.98	-5.30	11
ac80_5290MHz_Chain 1	-6.06	0.98	-5.08	11
ac80_5290MHz_Chain 0+Chain 1	-3.16	0.98	-2.18	10.3
ax20_5260MHz_RU_26/0_Chain 0	0.33	0.95	1.28	11
ax20_5260MHz_RU_52/37_Chain 0	0.61	0.95	1.56	11
ax20_5260MHz_RU_106/53_Chain 0	0.83	0.95	1.78	11
ax20_5260MHz_RU_242/61_Chain 0	0.13	0.95	1.08	11
ax20_5260MHz_RU_26/0_Chain 1	0.11	0.95	1.06	11
ax20_5260MHz_RU_52/37_Chain 1	0.72	0.95	1.67	11
ax20_5260MHz_RU_106/53_Chain 1	0.84	0.95	1.79	11
ax20_5260MHz_RU_242/61_Chain 1	0.08	0.95	1.03	11
ax20_5260MHz_RU_26/0_Chain 0+Chain 1	3.23	0.95	4.18	10.3
ax20_5260MHz_RU_52/37_Chain 0+Chain 1	3.68	0.95	4.63	10.3
ax20_5260MHz_RU_106/53_Chain 0+Chain 1	3.85	0.95	4.80	10.3
ax20_5260MHz_RU_242/61_Chain 0+Chain 1	3.12	0.95	4.07	10.3
ax20_5280MHz_RU_26/0_Chain 0	0.23	0.95	1.18	11
ax20_5280MHz_RU_52/37_Chain 0	0.72	0.95	1.67	11
ax20_5280MHz_RU_106/53_Chain 0	0.50	0.95	1.45	11
ax20_5280MHz_RU_242/61_Chain 0	0.23	0.95	1.18	11
ax20_5280MHz_RU_26/0_Chain 1	0.45	0.95	1.40	11
ax20_5280MHz_RU_52/37_Chain 1	0.83	0.95	1.78	11
ax20_5280MHz_RU_106/53_Chain 1	0.66	0.95	1.61	11
ax20_5280MHz_RU_242/61_Chain 1	0.41	0.95	1.36	11
ax20_5280MHz_RU_26/0_Chain 0+Chain 1	3.35	0.95	4.30	10.3
ax20_5280MHz_RU_52/37_Chain 0+Chain 1	3.79	0.95	4.74	10.3
ax20_5280MHz_RU_106/53_Chain 0+Chain 1	3.59	0.95	4.54	10.3
ax20_5280MHz_RU_242/61_Chain 0+Chain 1	3.33	0.95	4.28	11
ax20_5320MHz_RU_26/8_Chain 0	0.41	0.95	1.36	11
ax20_5320MHz_RU_52/40_Chain 0	0.51	0.95	1.46	11
ax20_5320MHz_RU_106/54_Chain 0	0.64	0.95	1.59	11
ax20_5320MHz_RU_242/61_Chain 0	0.51	0.95	1.46	11
ax20_5320MHz_RU_26/8_Chain 1	0.54	0.95	1.49	11
ax20_5320MHz_RU_52/40_Chain 1	0.91	0.95	1.86	11
ax20_5320MHz_RU_106/54_Chain 1	0.90	0.95	1.85	11
ax20_5320MHz_RU_242/61_Chain 1	0.07	0.95	1.02	11
ax20_5320MHz_RU_26/8_Chain 0+Chain 1	3.49	0.95	4.44	10.3
ax20_5320MHz_RU_52/40_Chain 0+Chain 1	3.72	0.95	4.67	10.3
ax20_5320MHz_RU_106/54_Chain 0+Chain 1	3.78	0.95	4.73	10.3
ax20_5320MHz_RU_242/61_Chain 0+Chain 1	3.31	0.95	4.26	10.3
ax40_5270MHz_RU_26/0_Chain 0	-1.17	0.96	-0.21	11
ax40_5270MHz_RU_52/37_Chain 0	-1.14	0.96	-0.18	11
ax40_5270MHz_RU_106/53_Chain 0	-1.05	0.96	-0.09	11
ax40_5270MHz_RU_242/61_Chain 0	-1.35	0.96	-0.39	11
ax40_5270MHz_RU_484/65_Chain 0	-1.18	0.96	-0.22	11
ax40_5270MHz_RU_26/0_Chain 1	-1.51	0.96	-0.55	11
ax40_5270MHz_RU_52/37_Chain 1	-1.22	0.96	-0.26	11
ax40_5270MHz_RU_106/53_Chain 1	-1.14	0.96	-0.18	11
ax40_5270MHz_RU_242/61_Chain 1	-1.80	0.96	-0.84	11
ax40_5270MHz_RU_484/65_Chain 1	-1.62	0.96	-0.66	11
ax40_5270MHz_RU_26/0_Chain 0+Chain 1	1.67	0.96	2.63	10.3

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
ax40_5270MHz_RU_52/37_Chain 0+Chain 1	1.83	0.96	2.79	10.3
ax40_5270MHz_RU_106/53_Chain 0+Chain 1	1.92	0.96	2.88	10.3
ax40_5270MHz_RU_242/61_Chain 0+Chain 1	1.44	0.96	2.40	10.3
ax40_5270MHz_RU_484/65_Chain 0+Chain 1	1.62	0.96	2.58	10.3
ax40_5310MHz_RU_26/17_Chain 0	-1.53	0.96	-0.57	11
ax40_5310MHz_RU_52/44_Chain 0	-1.28	0.96	-0.32	11
ax40_5310MHz_RU_106/56_Chain 0	-1.25	0.96	-0.29	11
ax40_5310MHz_RU_242/62_Chain 0	-1.45	0.96	-0.49	11
ax40_5310MHz_RU_484/65_Chain 0	-1.45	0.96	-0.49	11
ax40_5310MHz_RU_26/17_Chain 1	-1.30	0.96	-0.34	11
ax40_5310MHz_RU_52/44_Chain 1	-1.02	0.96	-0.06	11
ax40_5310MHz_RU_106/56_Chain 1	-1.10	0.96	-0.14	11
ax40_5310MHz_RU_242/62_Chain 1	-1.81	0.96	-0.85	11
ax40_5310MHz_RU_484/65_Chain 1	-1.10	0.96	-0.14	11
ax40_5310MHz_RU_26/17_Chain 0+Chain 1	1.60	0.96	2.56	10.3
ax40_5310MHz_RU_52/44_Chain 0+Chain 1	1.86	0.96	2.82	10.3
ax40_5310MHz_RU_106/56_Chain 0+Chain 1	1.84	0.96	2.80	10.3
ax40_5310MHz_RU_242/62_Chain 0+Chain 1	1.38	0.96	2.34	10.3
ax40_5310MHz_RU_484/65_Chain 0+Chain 1	1.74	0.96	2.70	10.3
ax80_5290MHz_RU_26/0_Chain 0	-4.28	0.97	-3.31	11
ax80_5290MHz_RU_52/37_Chain 0	-4.09	0.97	-3.12	11
ax80_5290MHz_RU_106/53_Chain 0	-4.28	0.97	-3.31	11
ax80_5290MHz_RU_242/61_Chain 0	-4.13	0.97	-3.16	11
ax80_5290MHz_RU_484/65_Chain 0	-4.72	0.97	-3.75	11
ax80_5290MHz_RU_996/67_Chain 0	-4.14	0.97	-3.17	11
ax80_5290MHz_RU_26/0_Chain 1	-4.15	0.97	-3.18	11
ax80_5290MHz_RU_52/37_Chain 1	-4.06	0.97	-3.09	11
ax80_5290MHz_RU_106/53_Chain 1	-4.12	0.97	-3.15	11
ax80_5290MHz_RU_242/61_Chain 1	-4.24	0.97	-3.27	11
ax80_5290MHz_RU_484/65_Chain 1	-4.61	0.97	-3.64	11
ax80_5290MHz_RU_996/67_Chain 1	-4.25	0.97	-3.28	11
ax80_5290MHz_RU_26/0_Chain 0+Chain 1	-1.20	0.97	-0.23	10.3
ax80_5290MHz_RU_52/37_Chain 0+Chain 1	-1.06	0.97	-0.09	10.3
ax80_5290MHz_RU_106/53_Chain 0+Chain 1	-1.19	0.97	-0.22	10.3
ax80_5290MHz_RU_242/61_Chain 0+Chain 1	-1.17	0.97	-0.20	10.3
ax80_5290MHz_RU_484/65_Chain 0+Chain 1	-1.65	0.97	-0.68	10.3
ax80_5290MHz_RU_996/67_Chain 0+Chain 1	-1.18	0.97	-0.21	10.3

5470-5725 MHz

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
a_5500MHz_Chain 0	5.45	0.18	5.63	11
a_5500MHz_Chain 1	5.14	0.18	5.32	11
a_5580MHz_Chain 0	5.13	0.18	5.31	11
a_5580MHz_Chain 1	4.60	0.18	4.78	11
a_5700MHz_Chain 0	4.86	0.18	5.04	11
a_5700MHz_Chain 1	5.04	0.18	5.22	11
a_5720MHz_Chain 0	4.90	0.18	5.08	11
a_5720MHz_Chain 1	4.87	0.18	5.05	11
n20_5500MHz_Chain 0	4.74	0.95	5.69	11
n20_5500MHz_Chain 1	4.59	0.95	5.54	11
n20_5500MHz_Chain 0+Chain 1	7.68	0.95	8.63	10.3
n20_5580MHz_Chain 0	4.24	0.95	5.19	11
n20_5580MHz_Chain 1	3.82	0.95	4.77	11
n20_5580MHz_Chain 0+Chain 1	7.05	0.95	8.00	10.3
n20_5700MHz_Chain 0	-0.42	0.95	0.53	11
n20_5700MHz_Chain 1	0.15	0.95	1.10	11
n20_5700MHz_Chain 0+Chain 1	2.88	0.95	3.83	10.3
n20_5720MHz_Chain 0	-0.23	0.95	0.72	11
n20_5720MHz_Chain 1	0.14	0.95	1.09	11
n20_5720MHz_Chain 0+Chain 1	2.97	0.95	3.92	10.3
n40_5510MHz_Chain 0	-0.58	0.95	0.37	11
n40_5510MHz_Chain 1	-1.01	0.95	-0.06	11
n40_5510MHz_Chain 0+Chain 1	2.22	0.96	3.18	10.3
n40_5550MHz_Chain 0	-0.69	0.96	0.27	11
n40_5550MHz_Chain 1	-0.83	0.96	0.13	11
n40_5550MHz_Chain 0+Chain 1	2.25	0.96	3.21	10.3
n40_5670MHz_Chain 0	-2.63	0.96	-1.67	11
n40_5670MHz_Chain 1	-2.01	0.96	-1.05	11
n40_5670MHz_Chain 0+Chain 1	0.70	0.96	1.66	10.3
n40_5710MHz_Chain 0	-2.20	0.96	-1.24	11
n40_5710MHz_Chain 1	-1.83	0.96	-0.87	11
n40_5710MHz_Chain 0+Chain 1	1	0.96	1.96	10.3
ac20_5500MHz_Chain 0	1.53	0.96	2.49	11
ac20_5500MHz_Chain 1	1.38	0.96	2.34	11
ac20_5500MHz_Chain 0+Chain 1	4.47	0.96	5.43	10.3
ac20_5580MHz_Chain 0	0.93	0.96	1.89	11
ac20_5580MHz_Chain 1	0.94	0.96	1.90	11
ac20_5580MHz_Chain 0+Chain 1	3.95	0.96	4.91	10.3
ac20_5700MHz_Chain 0	0.57	0.96	1.53	11
ac20_5700MHz_Chain 1	1.06	0.96	2.02	11
ac20_5700MHz_Chain 0+Chain 1	3.83	0.96	4.79	10.3
ac20_5720MHz_Chain 0	0.51	0.96	1.47	11
ac20_5720MHz_Chain 1	1.12	0.96	2.08	11
ac20_5720MHz_Chain 0+Chain 1	3.84	0.96	4.80	10.3
ac40_5510MHz_Chain 0	-1.51	0.97	-0.54	11
ac40_5510MHz_Chain 1	-1.51	0.97	-0.54	11
ac40_5510MHz_Chain 0+Chain 1	1.50	0.97	2.47	10.3
ac40_5550MHz_Chain 0	-1.47	0.97	-0.50	11
ac40_5550MHz_Chain 1	-1.28	0.97	-0.31	11
ac40_5550MHz_Chain 0+Chain 1	1.64	0.97	2.61	10.3
ac40_5670MHz_Chain 0	-2.33	0.97	-1.36	11
ac40_5670MHz_Chain 1	-1.45	0.97	-0.48	11
ac40_5670MHz_Chain 0+Chain 1	1.14	0.97	2.11	10.3
ac40_5710MHz_Chain 0	-2.45	0.97	-1.48	11
ac40_5710MHz_Chain 1	-1.71	0.97	-0.74	11
ac40_5710MHz_Chain 0+Chain 1	0.95	0.97	1.92	10.3

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
ac80_5530MHz_Chain 0	-5.93	0.98	-4.95	11
ac80_5530MHz_Chain 1	-5.67	0.98	-4.69	11
ac80_5530MHz_Chain 0+Chain 1	-2.79	0.98	-1.81	10.3
ac80_5610MHz_Chain 0	-5.97	0.98	-4.99	11
ac80_5610MHz_Chain 1	-5.65	0.98	-4.67	11
ac80_5610MHz_Chain 0+Chain 1	-2.80	0.98	-1.82	10.3
ac80_5690MHz_Chain 0	-6.48	0.98	-5.50	11
ac80_5690MHz_Chain 1	-5.87	0.98	-4.89	11
ac80_5690MHz_Chain 0+Chain 1	-3.15	0.98	-2.17	10.3
ax20_5500MHz_RU_26/0_Chain 0	2.13	0.95	3.08	11
ax20_5500MHz_RU_52/37_Chain 0	2.47	0.95	3.42	11
ax20_5500MHz_RU_106/53_Chain 0	2.93	0.95	3.88	11
ax20_5500MHz_RU_242/61_Chain 0	2.08	0.95	3.03	11
ax20_5500MHz_RU_26/0_Chain 1	2.81	0.95	3.76	11
ax20_5500MHz_RU_52/37_Chain 1	2.36	0.95	3.31	11
ax20_5500MHz_RU_106/53_Chain 1	2.72	0.95	3.67	11
ax20_5500MHz_RU_242/61_Chain 1	2.57	0.95	3.52	11
ax20_5500MHz_RU_26/0_Chain 0+Chain 1	5.49	0.95	6.44	10.3
ax20_5500MHz_RU_52/37_Chain 0+Chain 1	5.43	0.95	6.38	10.3
ax20_5500MHz_RU_106/53_Chain 0+Chain 1	5.84	0.95	6.79	10.3
ax20_5500MHz_RU_242/61_Chain 0+Chain 1	5.34	0.95	6.29	10.3
ax20_5580MHz_RU_26/0_Chain 0	1.81	0.95	2.76	11
ax20_5580MHz_RU_52/37_Chain 0	1.61	0.95	2.56	11
ax20_5580MHz_RU_106/53_Chain 0	1.31	0.95	2.26	11
ax20_5580MHz_RU_242/61_Chain 0	1.74	0.95	2.69	11
ax20_5580MHz_RU_26/0_Chain 1	1.37	0.95	2.32	11
ax20_5580MHz_RU_52/37_Chain 1	1.88	0.95	2.83	11
ax20_5580MHz_RU_106/53_Chain 1	1.51	0.95	2.46	11
ax20_5580MHz_RU_242/61_Chain 1	1.22	0.95	2.17	11
ax20_5580MHz_RU_26/0_Chain 0+Chain 1	4.61	0.95	5.56	10.3
ax20_5580MHz_RU_52/37_Chain 0+Chain 1	4.76	0.95	5.71	10.3
ax20_5580MHz_RU_106/53_Chain 0+Chain 1	4.42	0.95	5.37	10.3
ax20_5580MHz_RU_242/61_Chain 0+Chain 1	4.50	0.95	5.45	10.3
ax20_5700MHz_RU_26/8_Chain 0	1.71	0.95	2.66	11
ax20_5700MHz_RU_52/40_Chain 0	1.27	0.95	2.22	11
ax20_5700MHz_RU_106/54_Chain 0	1.13	0.95	2.08	11
ax20_5700MHz_RU_242/61_Chain 0	1.68	0.95	2.63	11
ax20_5700MHz_RU_26/8_Chain 1	1.60	0.95	2.55	11
ax20_5700MHz_RU_52/40_Chain 1	1.10	0.95	2.05	11
ax20_5700MHz_RU_106/54_Chain 1	1.29	0.95	2.24	11
ax20_5700MHz_RU_242/61_Chain 1	1.56	0.95	2.51	11
ax20_5700MHz_RU_26/8_Chain 0+Chain 1	4.67	0.95	5.62	10.3
ax20_5700MHz_RU_52/40_Chain 0+Chain 1	4.20	0.95	5.15	10.3
ax20_5700MHz_RU_106/54_Chain 0+Chain 1	4.22	0.95	5.17	10.3
ax20_5700MHz_RU_242/61_Chain 0+Chain 1	4.63	0.95	5.58	10.3
ax20_5720MHz_RU_26/8_Chain 0	1.80	0.95	2.75	11
ax20_5720MHz_RU_52/40_Chain 0	1.20	0.95	2.15	11
ax20_5720MHz_RU_106/54_Chain 0	1.22	0.95	2.17	11
ax20_5720MHz_RU_242/61_Chain 0	1.64	0.95	2.59	11
ax20_5720MHz_RU_26/8_Chain 1	1.16	0.95	2.11	11
ax20_5720MHz_RU_52/40_Chain 1	1.38	0.95	2.33	11
ax20_5720MHz_RU_106/54_Chain 1	1.67	0.95	2.62	11
ax20_5720MHz_RU_242/61_Chain 1	1.10	0.95	2.05	11
ax20_5720MHz_RU_26/8_Chain 0+Chain 1	4.50	0.95	5.45	10.3
ax20_5720MHz_RU_52/40_Chain 0+Chain 1	4.30	0.95	5.25	10.3
ax20_5720MHz_RU_106/54_Chain 0+Chain 1	4.46	0.95	5.41	10.3
ax20_5720MHz_RU_242/61_Chain 0+Chain 1	4.39	0.95	5.34	10.3
ax40_5510MHz_RU_26/0_Chain 0	-1.62	0.96	-0.66	11

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
ax40_5510MHz_RU_52/37_Chain 0	-1.35	0.96	-0.39	11
ax40_5510MHz_RU_106/53_Chain 0	-1.80	0.96	-0.84	11
ax40_5510MHz_RU_242/61_Chain 0	-1.47	0.96	-0.51	11
ax40_5510MHz_RU_484/65_Chain 0	-1.25	0.96	-0.29	11
ax40_5510MHz_RU_26/0_Chain 1	-1.81	0.96	-0.85	11
ax40_5510MHz_RU_52/37_Chain 1	-1.66	0.96	-0.70	11
ax40_5510MHz_RU_106/53_Chain 1	-1.47	0.96	-0.51	11
ax40_5510MHz_RU_242/61_Chain 1	-1.83	0.96	-0.87	11
ax40_5510MHz_RU_484/65_Chain 1	-1.31	0.96	-0.35	11
ax40_5510MHz_RU_26/0_Chain 0+Chain 1	1.30	0.96	2.26	10.3
ax40_5510MHz_RU_52/37_Chain 0+Chain 1	1.51	0.96	2.47	10.3
ax40_5510MHz_RU_106/53_Chain 0+Chain 1	1.38	0.96	2.34	10.3
ax40_5510MHz_RU_242/61_Chain 0+Chain 1	1.36	0.96	2.32	10.3
ax40_5510MHz_RU_484/65_Chain 0+Chain 1	1.73	0.96	2.69	10.3
ax40_5550MHz_RU_26/0_Chain 0	-1.22	0.96	-0.26	11
ax40_5550MHz_RU_52/37_Chain 0	-1.54	0.96	-0.58	11
ax40_5550MHz_RU_106/53_Chain 0	-1.82	0.96	-0.86	11
ax40_5550MHz_RU_242/61_Chain 0	-1.49	0.96	-0.53	11
ax40_5550MHz_RU_484/65_Chain 0	-1.52	0.96	-0.56	11
ax40_5550MHz_RU_26/0_Chain 1	-1.10	0.96	-0.14	11
ax40_5550MHz_RU_52/37_Chain 1	-1.02	0.96	-0.06	11
ax40_5550MHz_RU_106/53_Chain 1	-1.31	0.96	-0.35	11
ax40_5550MHz_RU_242/61_Chain 1	-1.73	0.96	-0.77	11
ax40_5550MHz_RU_484/65_Chain 1	-1.58	0.96	-0.62	11
ax40_5550MHz_RU_26/0_Chain 0+Chain 1	1.85	0.96	2.81	10.3
ax40_5550MHz_RU_52/37_Chain 0+Chain 1	1.74	0.96	2.70	10.3
ax40_5550MHz_RU_106/53_Chain 0+Chain 1	1.45	0.96	2.41	10.3
ax40_5550MHz_RU_242/61_Chain 0+Chain 1	1.40	0.96	2.36	10.3
ax40_5550MHz_RU_484/65_Chain 0+Chain 1	1.46	0.96	2.42	10.3
ax40_5670MHz_RU_26/17_Chain 0	-1.28	0.96	-0.32	11
ax40_5670MHz_RU_52/44_Chain 0	-1.37	0.96	-0.41	11
ax40_5670MHz_RU_106/56_Chain 0	-1.53	0.96	-0.57	11
ax40_5670MHz_RU_242/62_Chain 0	-1.21	0.96	-0.25	11
ax40_5670MHz_RU_484/65_Chain 0	-1.55	0.96	-0.59	11
ax40_5670MHz_RU_26/17_Chain 1	-1.69	0.96	-0.73	11
ax40_5670MHz_RU_52/44_Chain 1	-1.51	0.96	-0.55	11
ax40_5670MHz_RU_106/56_Chain 1	-1.67	0.96	-0.71	11
ax40_5670MHz_RU_242/62_Chain 1	-1.85	0.96	-0.89	11
ax40_5670MHz_RU_484/65_Chain 1	-1.56	0.96	-0.60	11
ax40_5670MHz_RU_26/17_Chain 0+Chain 1	1.53	0.96	2.49	10.3
ax40_5670MHz_RU_52/44_Chain 0+Chain 1	1.57	0.96	2.53	10.3
ax40_5670MHz_RU_106/56_Chain 0+Chain 1	1.41	0.96	2.37	10.3
ax40_5670MHz_RU_242/62_Chain 0+Chain 1	1.49	0.96	2.45	10.3
ax40_5670MHz_RU_484/65_Chain 0+Chain 1	1.46	0.96	2.42	10.3
ax40_5710MHz_RU_26/17_Chain 0	-1.16	0.96	-0.20	11
ax40_5710MHz_RU_52/44_Chain 0	-1.87	0.96	-0.91	11
ax40_5710MHz_RU_106/56_Chain 0	-1.89	0.96	-0.93	11
ax40_5710MHz_RU_242/62_Chain 0	-1.71	0.96	-0.75	11
ax40_5710MHz_RU_484/65_Chain 0	-1.09	0.96	-0.13	11
ax40_5710MHz_RU_26/17_Chain 1	-1.08	0.96	-0.12	11
ax40_5710MHz_RU_52/44_Chain 1	-1.53	0.96	-0.57	11
ax40_5710MHz_RU_106/56_Chain 1	-1.75	0.96	-0.79	11
ax40_5710MHz_RU_242/62_Chain 1	-1.36	0.96	-0.40	11
ax40_5710MHz_RU_484/65_Chain 1	-1.85	0.96	-0.89	11
ax40_5710MHz_RU_26/17_Chain 0+Chain 1	1.89	0.96	2.85	10.3
ax40_5710MHz_RU_52/44_Chain 0+Chain 1	1.31	0.96	2.27	10.3
ax40_5710MHz_RU_106/56_Chain 0+Chain 1	1.19	0.96	2.15	10.3
ax40_5710MHz_RU_242/62_Chain 0+Chain 1	1.48	0.96	2.44	10.3

Mode	Value (dBm/MHz)	Duty Cycle Factor (dB)	PSD (dBm/MHz)	FCC&RSS-247 Limit (dBm/MHz)
ax40_5710MHz_RU_484/65_Chain 0+Chain 1	1.56	0.96	2.52	10.3
ax80_5530MHz_RU_26/0_Chain 0	-4.08	0.97	-3.11	11
ax80_5530MHz_RU_52/37_Chain 0	-4.69	0.97	-3.72	11
ax80_5530MHz_RU_106/53_Chain 0	-4.79	0.97	-3.82	11
ax80_5530MHz_RU_242/61_Chain 0	-4.45	0.97	-3.48	11
ax80_5530MHz_RU_484/65_Chain 0	-4.39	0.97	-3.42	11
ax80_5530MHz_RU_996/67_Chain 0	-4.07	0.97	-3.10	11
ax80_5530MHz_RU_26/0_Chain 1	-4.36	0.97	-3.39	11
ax80_5530MHz_RU_52/37_Chain 1	-4.48	0.97	-3.51	11
ax80_5530MHz_RU_106/53_Chain 1	-4.36	0.97	-3.39	11
ax80_5530MHz_RU_242/61_Chain 1	-4.68	0.97	-3.71	11
ax80_5530MHz_RU_484/65_Chain 1	-4.58	0.97	-3.61	11
ax80_5530MHz_RU_996/67_Chain 1	-4.37	0.97	-3.40	11
ax80_5530MHz_RU_26/0_Chain 0+Chain 1	-1.21	0.97	-0.24	10.3
ax80_5530MHz_RU_52/37_Chain 0+Chain 1	-1.57	0.97	-0.60	10.3
ax80_5530MHz_RU_106/53_Chain 0+Chain 1	-1.56	0.97	-0.59	10.3
ax80_5530MHz_RU_242/61_Chain 0+Chain 1	-1.55	0.97	-0.58	10.3
ax80_5530MHz_RU_484/65_Chain 0+Chain 1	-1.47	0.97	-0.50	10.3
ax80_5530MHz_RU_996/67_Chain 0+Chain 1	-1.21	0.97	-0.24	10.3
ax80_5610MHz_RU_26/0_Chain 0	-4.13	0.97	-3.16	11
ax80_5610MHz_RU_52/37_Chain 0	-4.26	0.97	-3.29	11
ax80_5610MHz_RU_106/53_Chain 0	-4.73	0.97	-3.76	11
ax80_5610MHz_RU_242/61_Chain 0	-4.58	0.97	-3.61	11
ax80_5610MHz_RU_484/65_Chain 0	-4.87	0.97	-3.90	11
ax80_5610MHz_RU_996/67_Chain 0	-4.17	0.97	-3.20	11
ax80_5610MHz_RU_26/0_Chain 1	-4.21	0.97	-3.24	11
ax80_5610MHz_RU_52/37_Chain 1	-4.84	0.97	-3.87	11
ax80_5610MHz_RU_106/53_Chain 1	-4.46	0.97	-3.49	11
ax80_5610MHz_RU_242/61_Chain 1	-4.64	0.97	-3.67	11
ax80_5610MHz_RU_484/65_Chain 1	-4.22	0.97	-3.25	11
ax80_5610MHz_RU_996/67_Chain 1	-4.13	0.97	-3.16	11
ax80_5610MHz_RU_26/0_Chain 0+Chain 1	-1.16	0.97	-0.19	10.3
ax80_5610MHz_RU_52/37_Chain 0+Chain 1	-1.53	0.97	-0.56	10.3
ax80_5610MHz_RU_106/53_Chain 0+Chain 1	-1.58	0.97	-0.61	10.3
ax80_5610MHz_RU_242/61_Chain 0+Chain 1	-1.60	0.97	-0.63	10.3
ax80_5610MHz_RU_484/65_Chain 0+Chain 1	-1.52	0.97	-0.55	10.3
ax80_5610MHz_RU_996/67_Chain 0+Chain 1	-1.14	0.97	-0.17	10.3
ax80_5690MHz_RU_26/36_Chain 0	-4.69	0.97	-3.72	11
ax80_5690MHz_RU_52/52_Chain 0	-4.08	0.97	-3.11	11
ax80_5690MHz_RU_106/60_Chain 0	-4.30	0.97	-3.33	11
ax80_5690MHz_RU_242/64_Chain 0	-4.13	0.97	-3.16	11
ax80_5690MHz_RU_484/66_Chain 0	-4.68	0.97	-3.71	11
ax80_5690MHz_RU_996/67_Chain 0	-4.61	0.97	-3.64	11
ax80_5690MHz_RU_26/36_Chain 1	-4.66	0.97	-3.69	11
ax80_5690MHz_RU_52/52_Chain 1	-4.50	0.97	-3.53	11
ax80_5690MHz_RU_106/60_Chain 1	-4.73	0.97	-3.76	11
ax80_5690MHz_RU_242/64_Chain 1	-4.71	0.97	-3.74	11
ax80_5690MHz_RU_484/66_Chain 1	-4.30	0.97	-3.33	11
ax80_5690MHz_RU_996/67_Chain 1	-4.23	0.97	-3.26	11
ax80_5690MHz_RU_26/36_Chain 0+Chain 1	-1.66	0.97	-0.69	10.3
ax80_5690MHz_RU_52/52_Chain 0+Chain 1	-1.27	0.97	-0.30	10.3
ax80_5690MHz_RU_106/60_Chain 0+Chain 1	-1.50	0.97	-0.53	10.3
ax80_5690MHz_RU_242/64_Chain 0+Chain 1	-1.40	0.97	-0.43	10.3
ax80_5690MHz_RU_484/66_Chain 0+Chain 1	-1.48	0.97	-0.51	10.3
ax80_5690MHz_RU_996/67_Chain 0+Chain 1	-1.41	0.97	-0.44	10.3

5250-5350 MHz

a_5260MHz_Chain 0

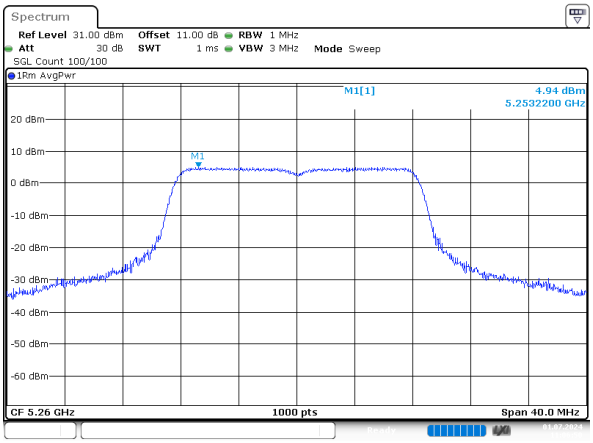

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:06:51

a_5260MHz_Chain 1

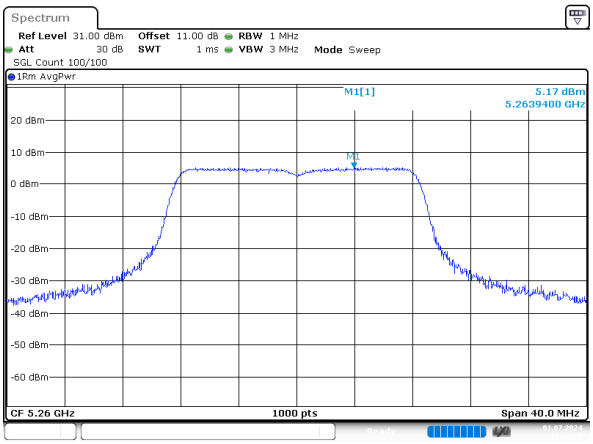

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 13:39:27

a_5280MHz_Chain 0

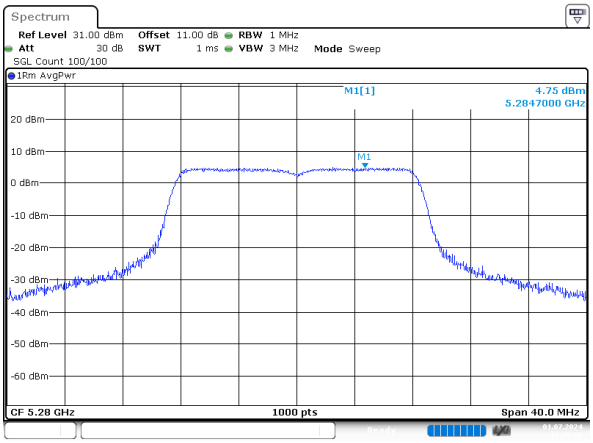

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:35:39

a_5280MHz_Chain 1

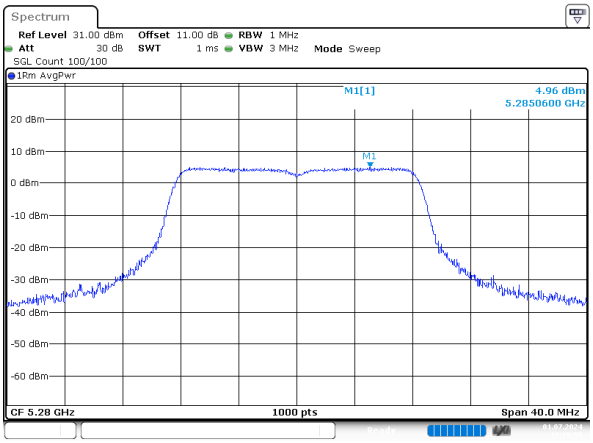

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 13:40:00

a_5320MHz_Chain 0

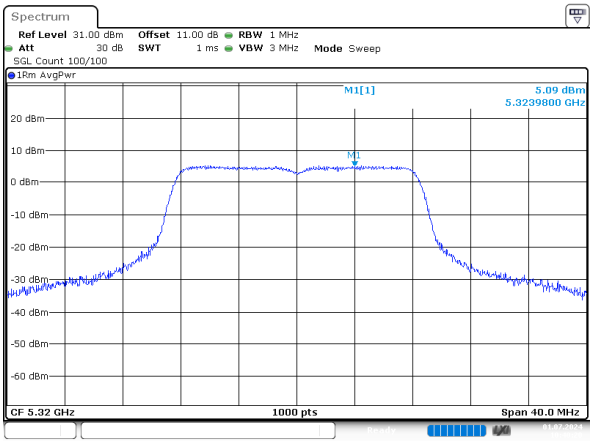

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:40:21

a_5320MHz_Chain 1

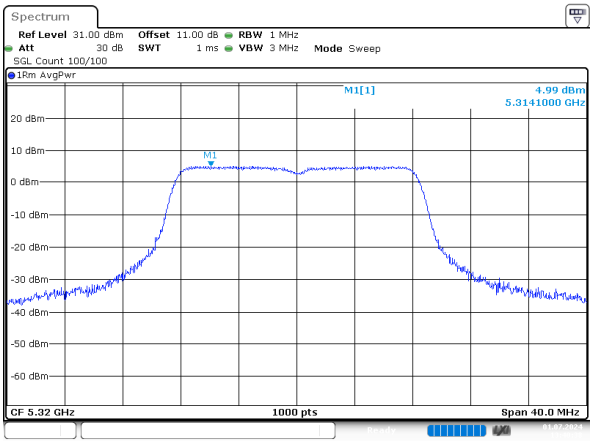

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 13:40:39

n20_5260MHz_Chain 0

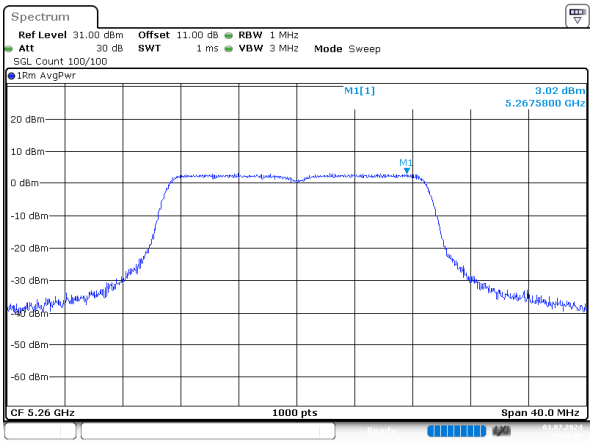

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:41:41

n20_5260MHz_Chain 1

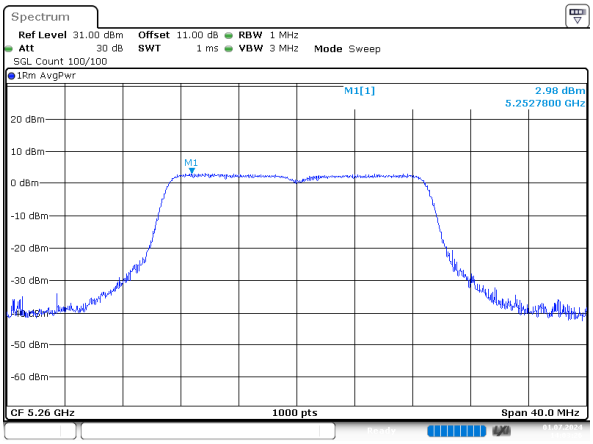

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:03:27

n20_5280MHz_Chain 0

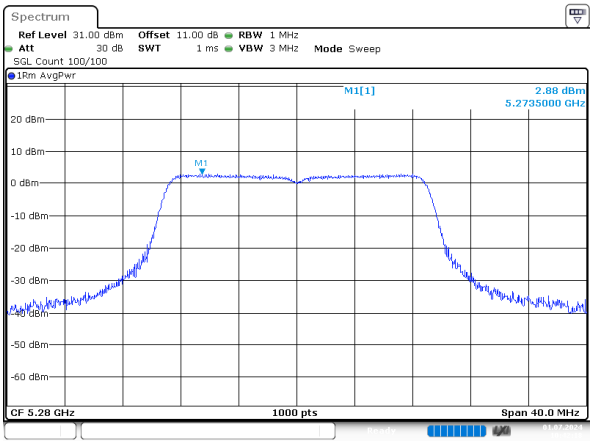

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:42:19

n20_5280MHz_Chain 1

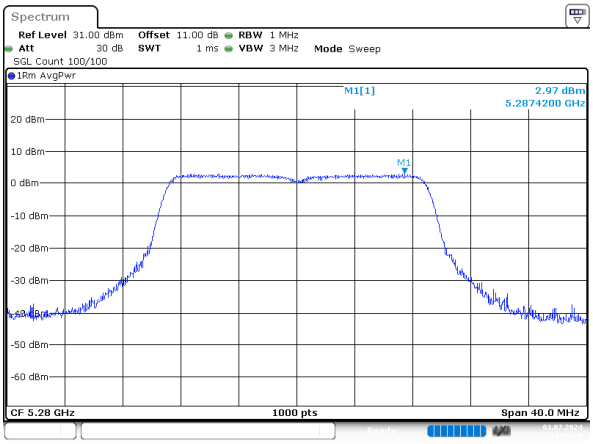

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:04:00

n20_5320MHz_Chain 0

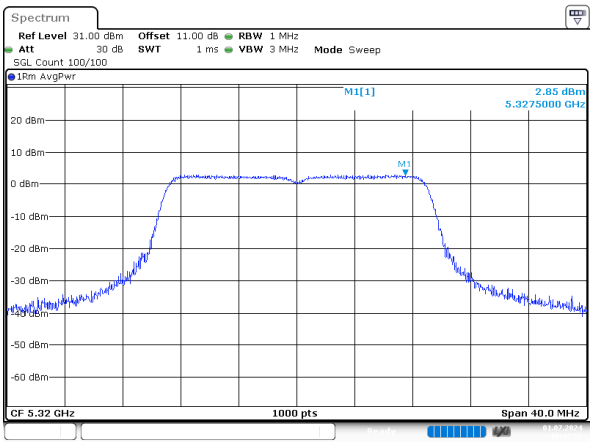

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:42:57

n20_5320MHz_Chain 1

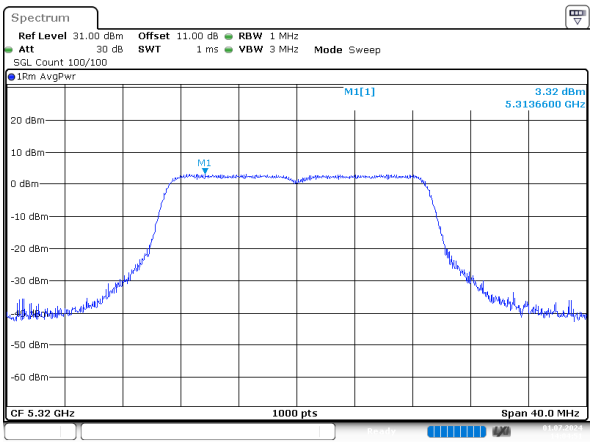

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:04:52

n40_5270MHz_Chain 0

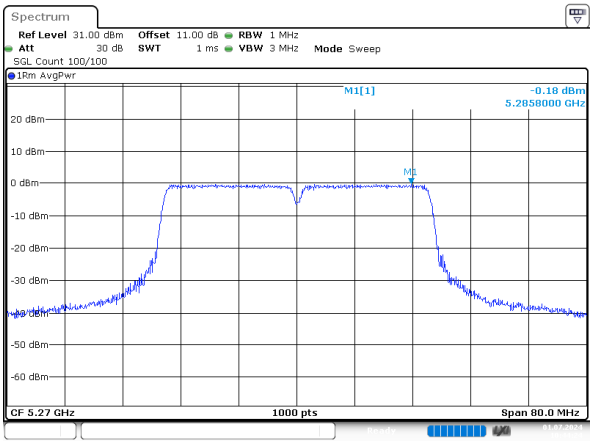

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:44:24

n40_5270MHz_Chain 1

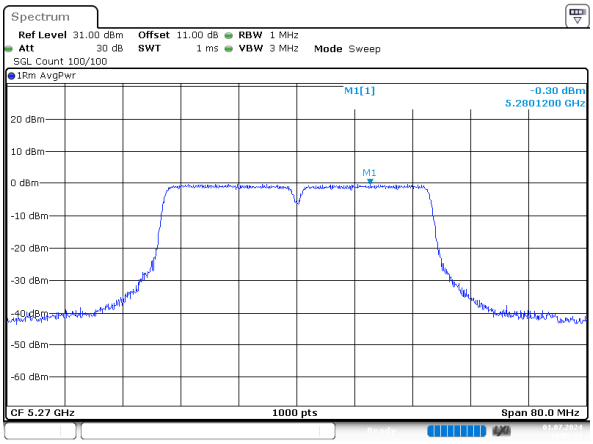

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:05:33

n40_5310MHz_Chain 0

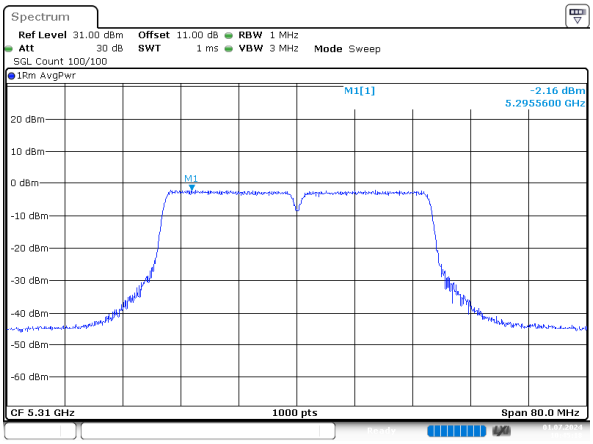

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:45:18

n40_5310MHz_Chain 1

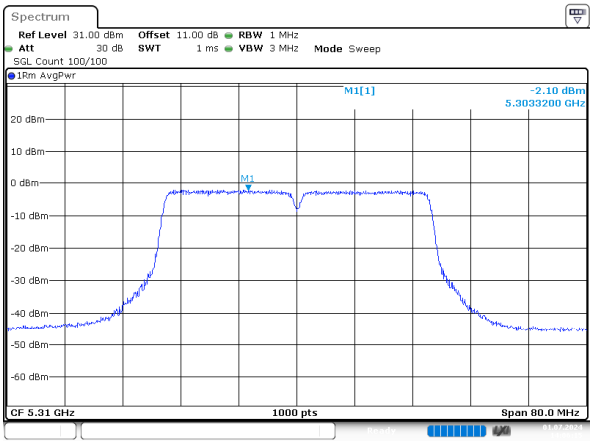

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:06:16

ac20_5260MHz_Chain 0

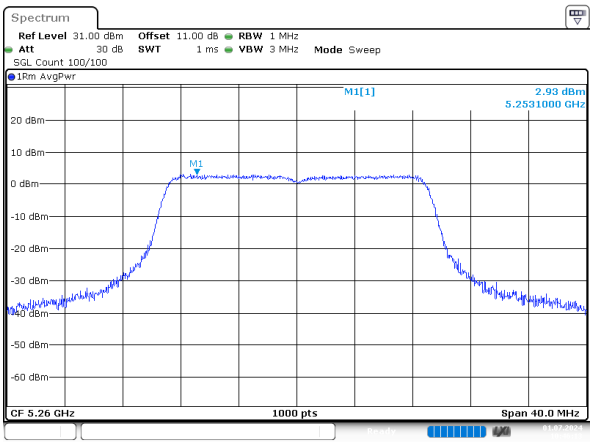

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:46:14

ac20_5260MHz_Chain 1

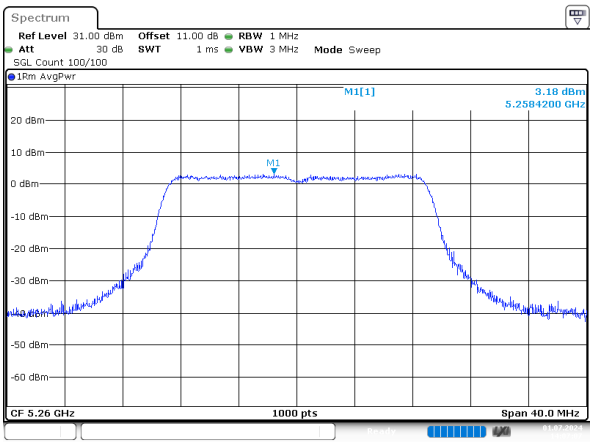

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:07:08

ac20_5280MHz_Chain 0

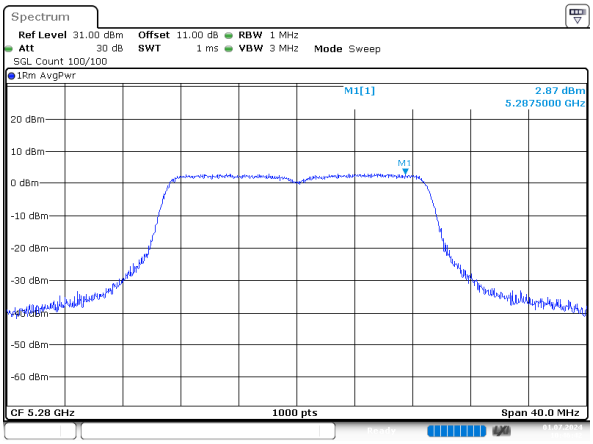

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:46:43

ac20_5280MHz_Chain 1

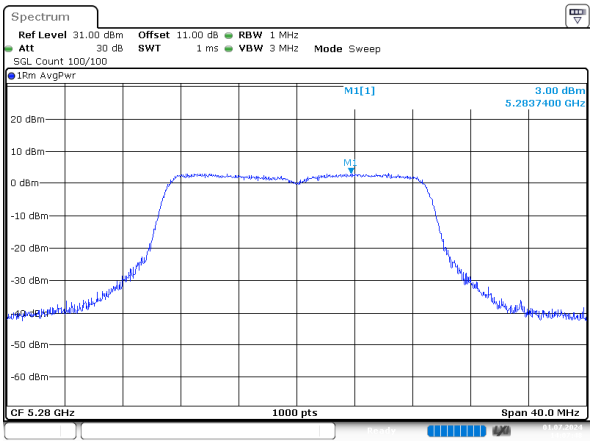

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:07:49

ac20_5320MHz_Chain 0

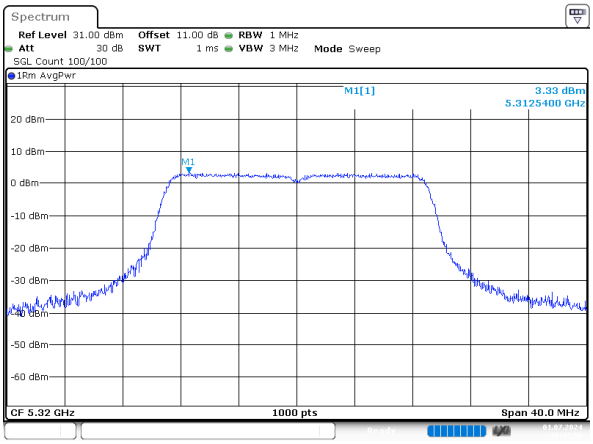

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:47:17

ac20_5320MHz_Chain 1

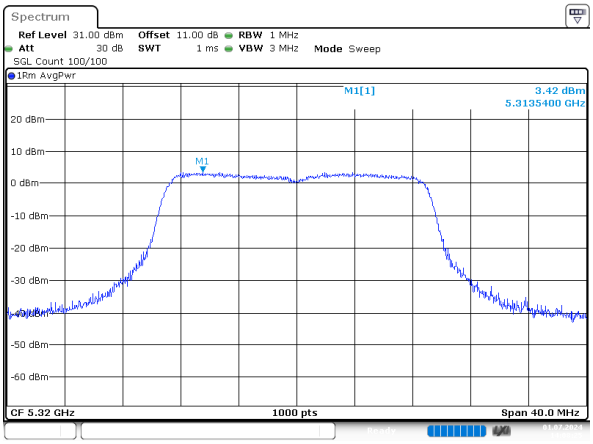

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:08:25

ac40_5270MHz_Chain 0

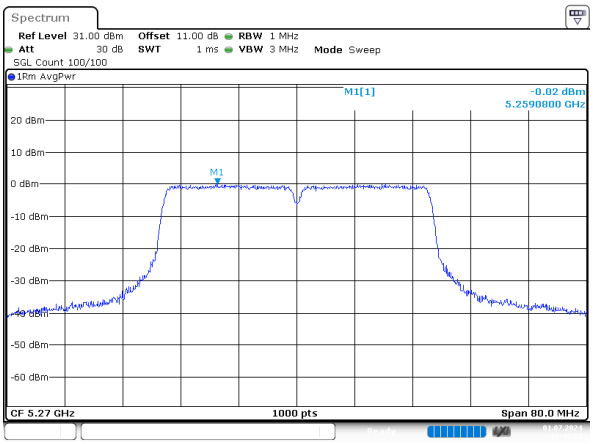

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:48:24

ac40_5270MHz_Chain 1

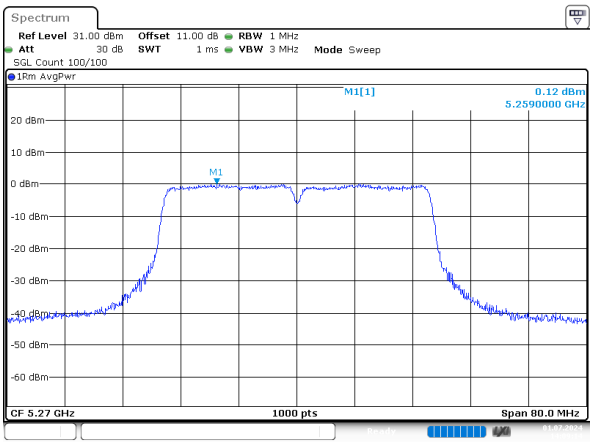

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:09:14

ac40_5310MHz_Chain 0

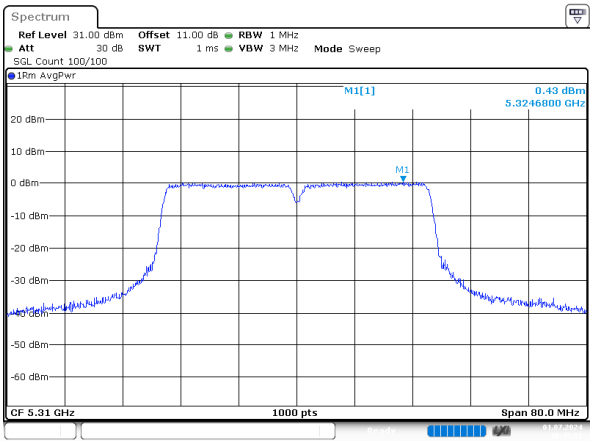

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 10:49:13

ac40_5310MHz_Chain 1

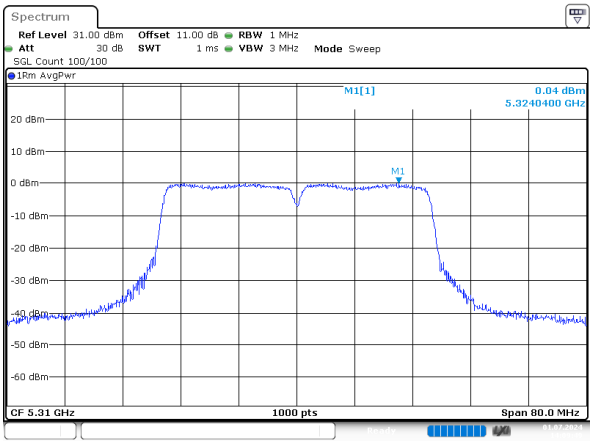

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:09:50

ac80_5290MHz_Chain 0

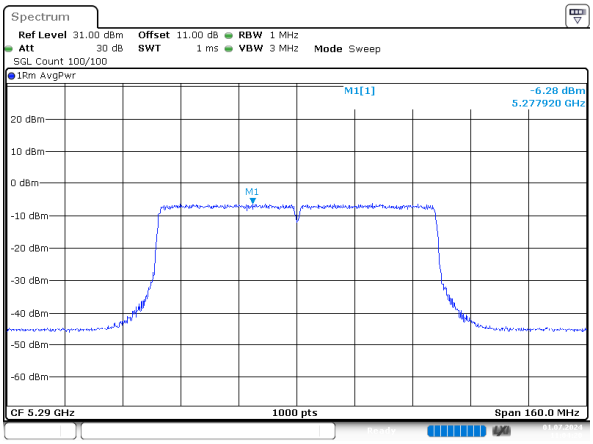

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:04:20

ac80_5290MHz_Chain 1

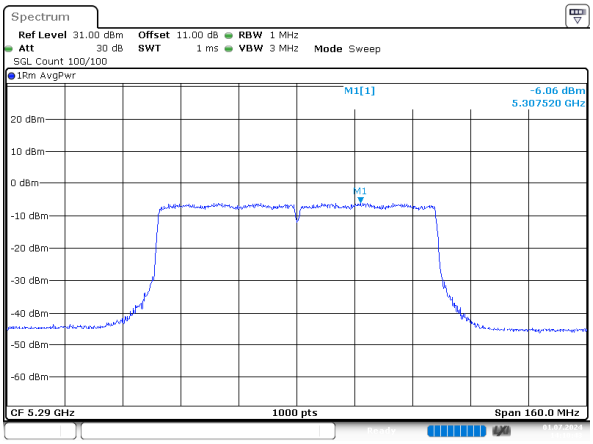

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:10:44

ax20_5260MHz_RU_26/0_Chain 0

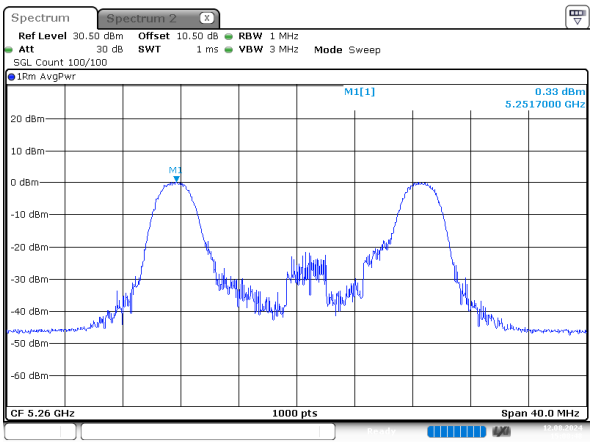

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:08:48

ax20_5260MHz_RU_52/37_Chain 0

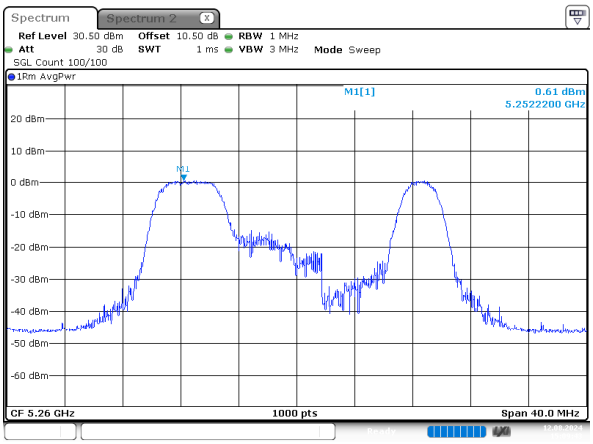

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:09:44

ax20_5260MHz_RU_106/53_Chain 0

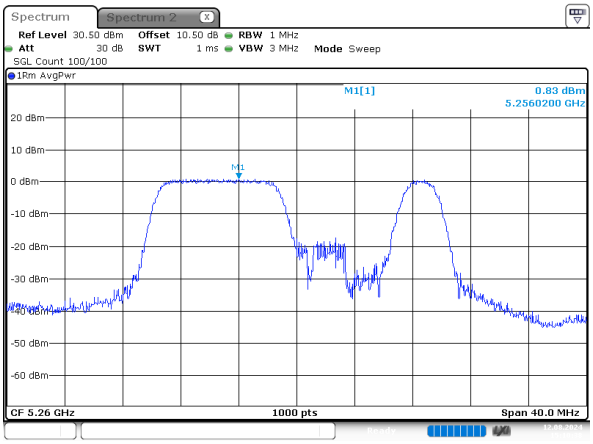

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:10:39

ax20_5260MHz_RU_242/61_Chain 0

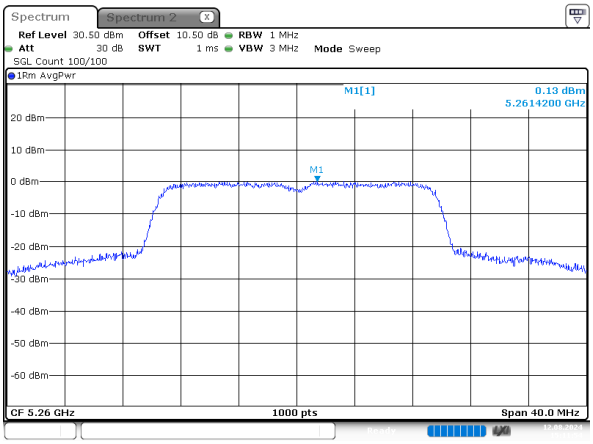

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:11:55

ax20_5260MHz_RU_26/0_Chain 1

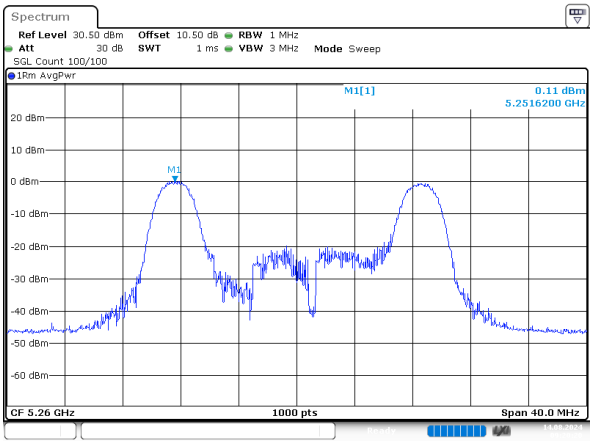

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:20:21

ax20_5260MHz_RU_52/37_Chain 1

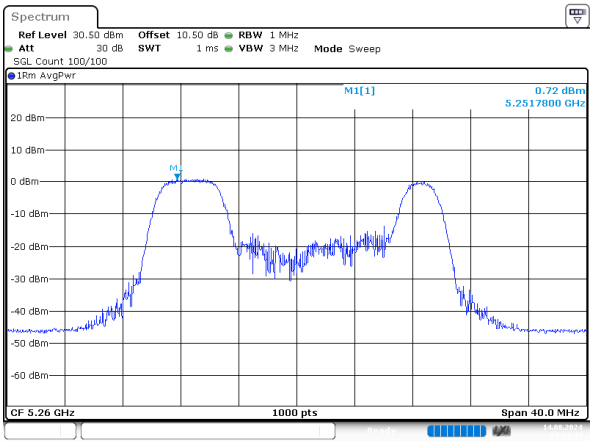

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:24:45

ax20_5260MHz_RU_106/53_Chain 1

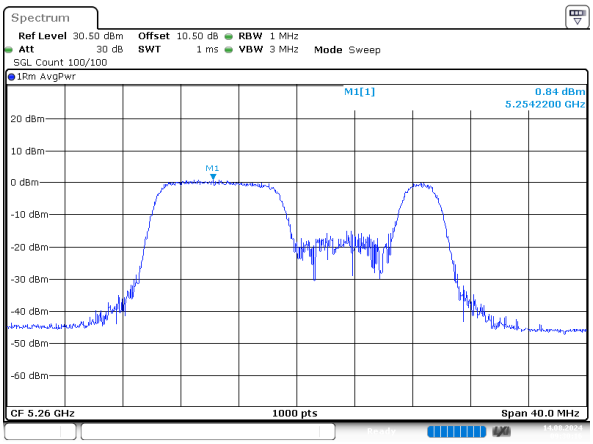

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:30:15

ax20_5260MHz_RU_242/61_Chain 1

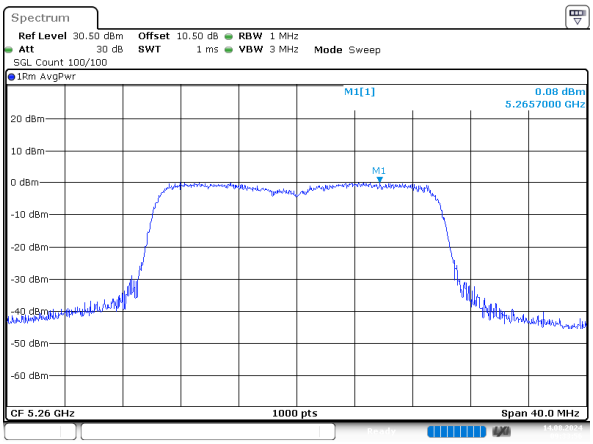

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:33:56

ax20_5280MHz_RU_26/0_Chain 0

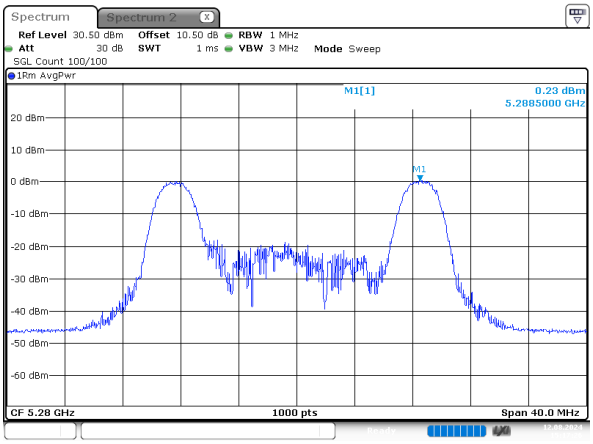

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:17:27

ax20_5280MHz_RU_52/37_Chain 0

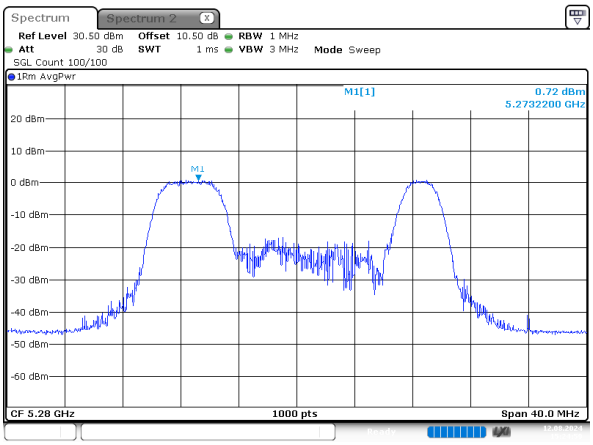

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:25:00

ax20_5280MHz_RU_106/53_Chain 0

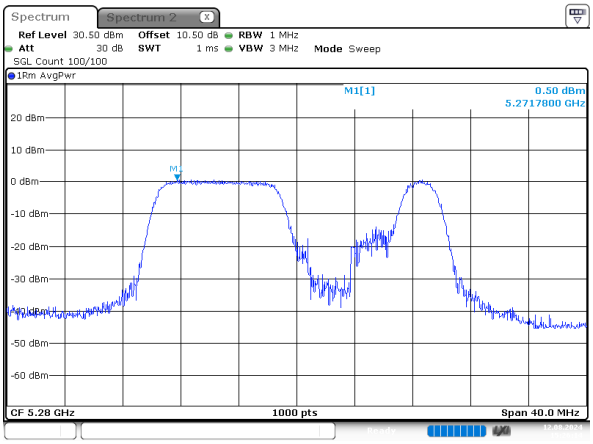

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:26:15

ax20_5280MHz_RU_242/61_Chain 0

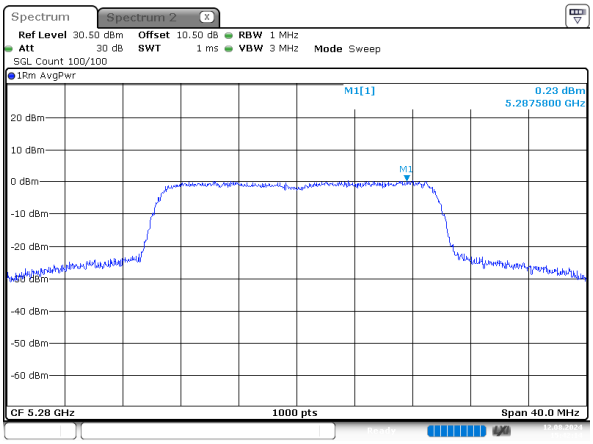

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 15:42:15

ax20_5280MHz_RU_26/0_Chain 1

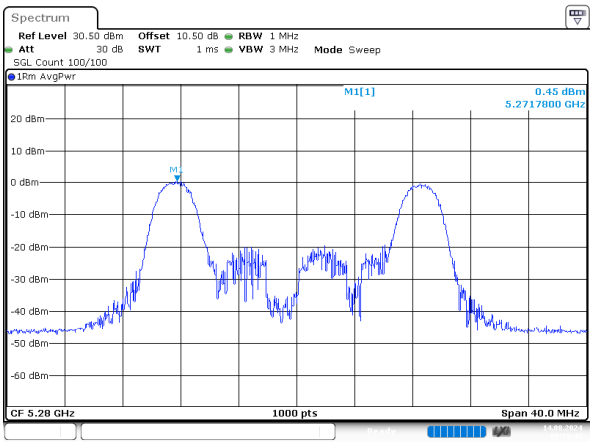

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:39:42

ax20_5280MHz_RU_52/37_Chain 1

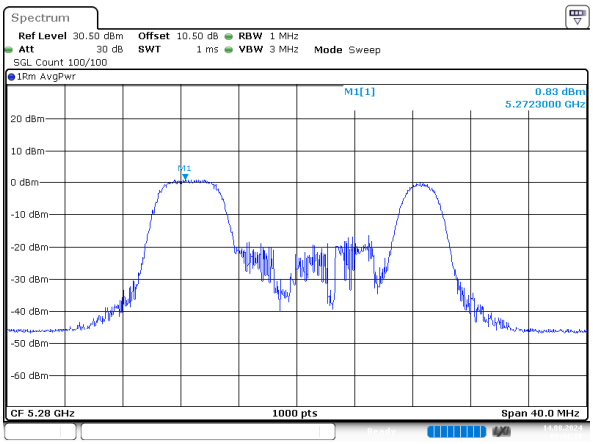

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:41:10

ax20_5280MHz_RU_106/53_Chain 1

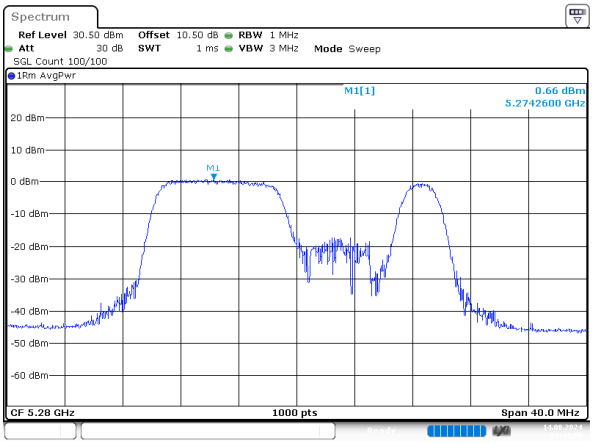

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:44:06

ax20_5280MHz_RU_242/61_Chain 1

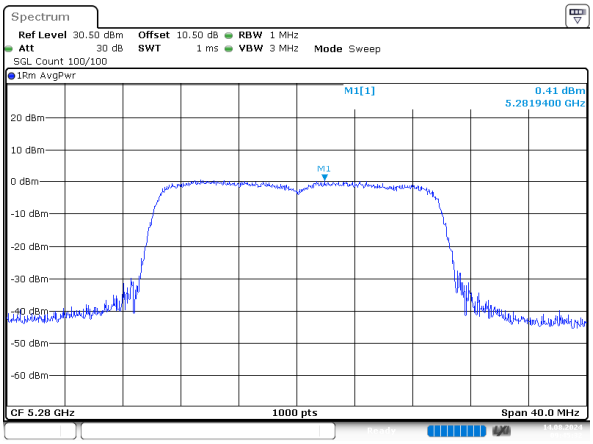

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:45:32

ax20_5320MHz_RU_26/8_Chain 0

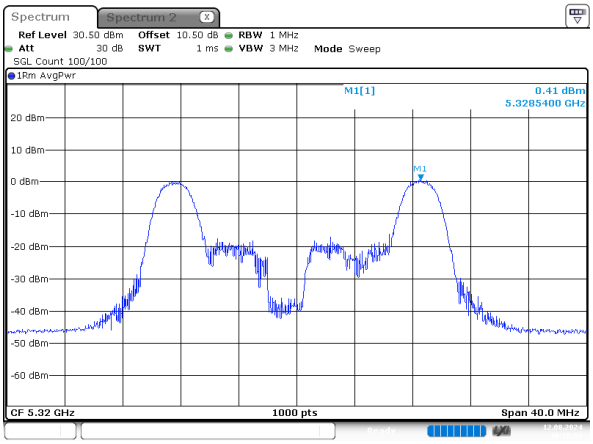

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:11:00

ax20_5320MHz_RU_52/40_Chain 0

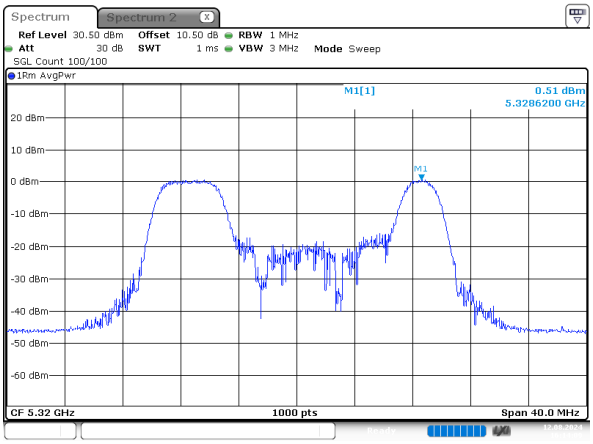

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:14:09

ax20_5320MHz_RU_106/54_Chain 0

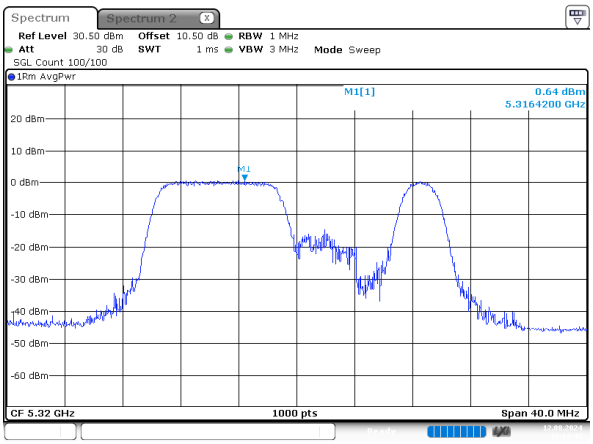

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:14:45

ax20_5320MHz_RU_242/61_Chain 0

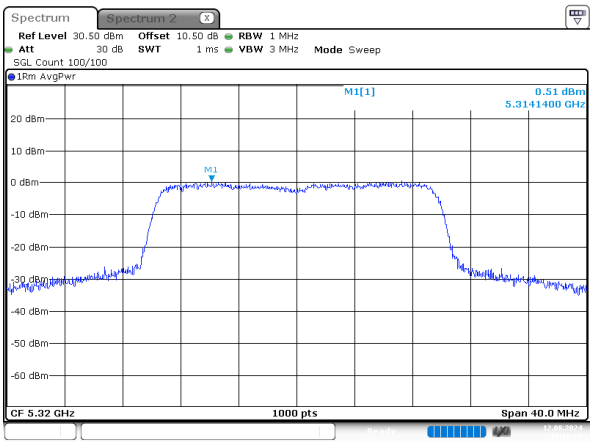

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:16:24

ax20_5320MHz_RU_26/8_Chain 1

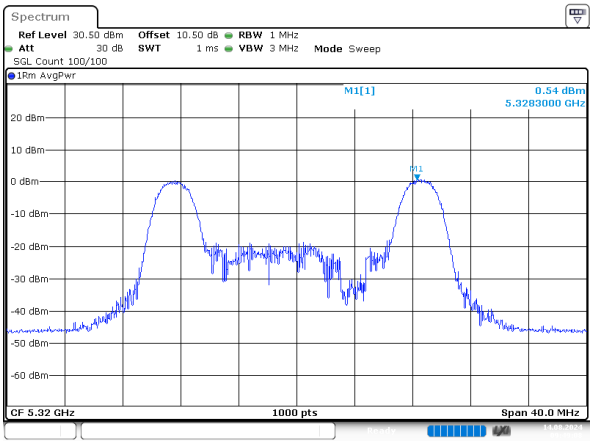

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:49:08

ax20_5320MHz_RU_52/40_Chain 1

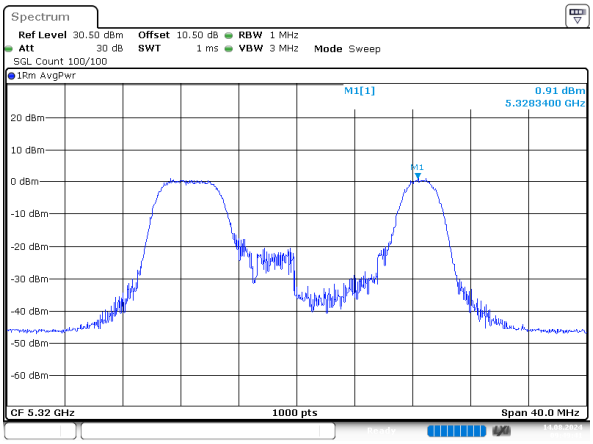

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:49:41

ax20_5320MHz_RU_106/54_Chain 1

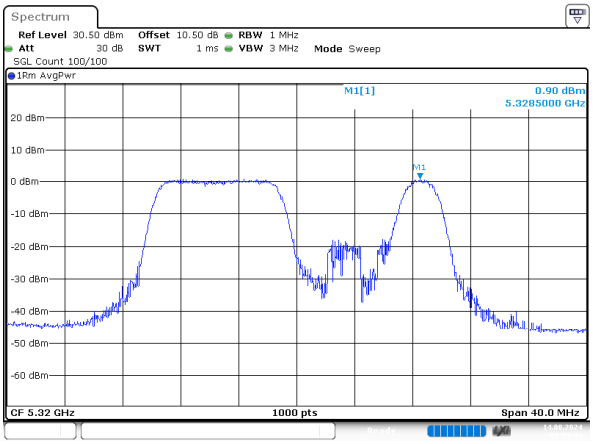

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:55:43

ax20_5320MHz_RU_242/61_Chain 1

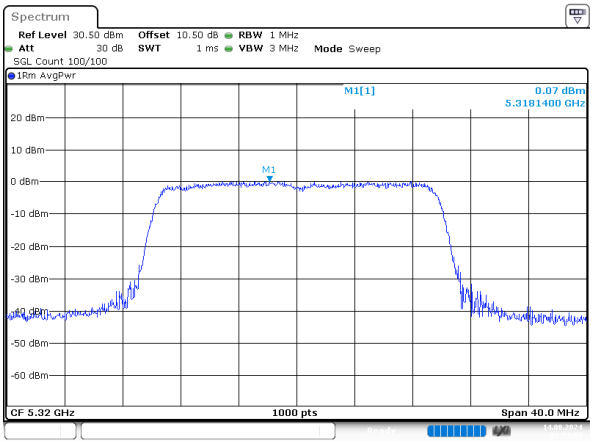

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 09:57:07

ax40_5270MHz_RU_26/0_Chain 0

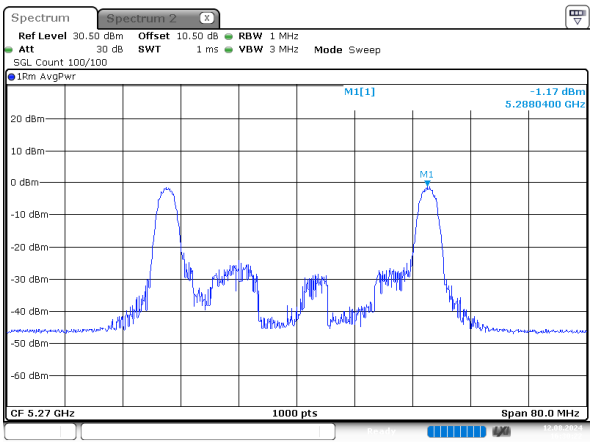

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:30:22

ax40_5270MHz_RU_52/37_Chain 0

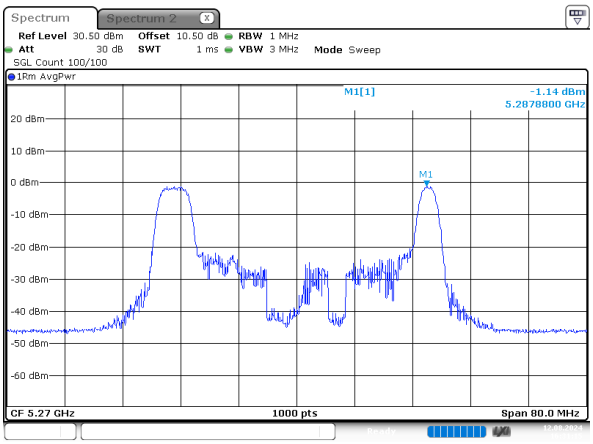

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:31:15

ax40_5270MHz_RU_106/53_Chain 0

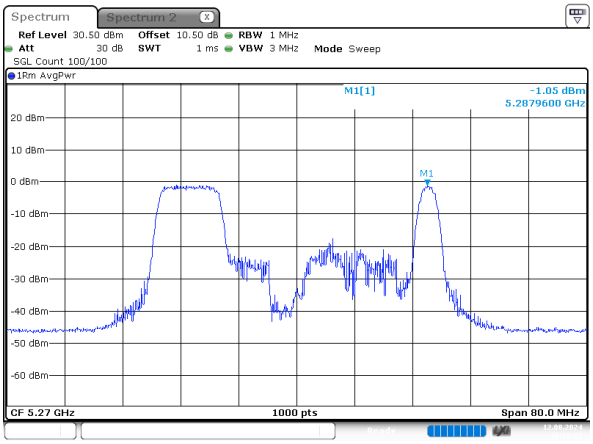

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:32:28

ax40_5270MHz_RU_242/61_Chain 0

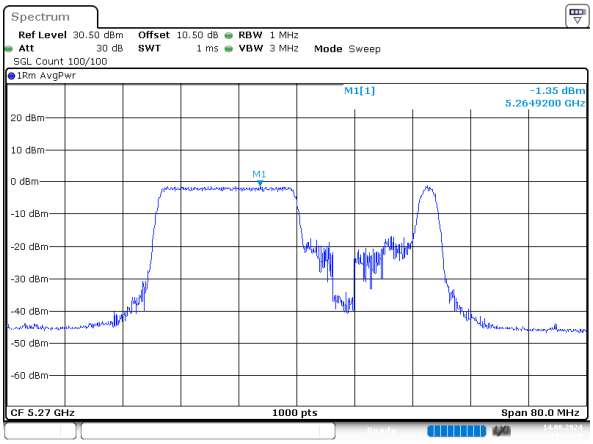

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:26:39

ax40_5270MHz_RU_484/65_Chain 0

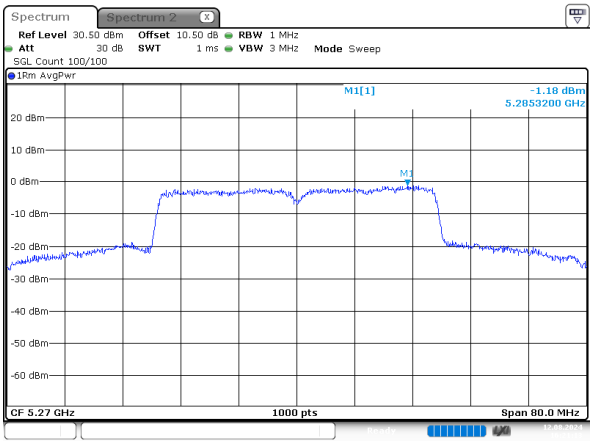

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:21:14

ax40_5270MHz_RU_26/0_Chain 1

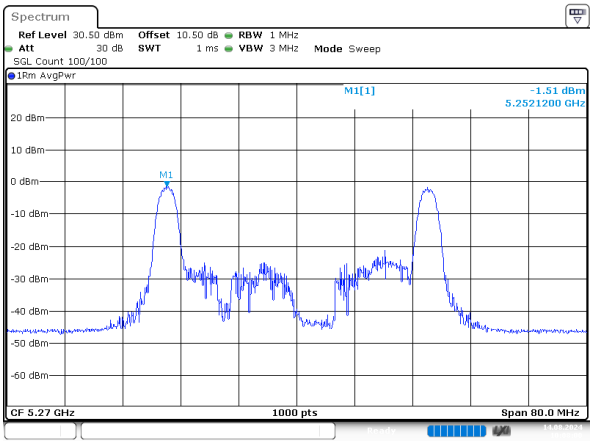

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:08:00

ax40_5270MHz_RU_52/37_Chain 1

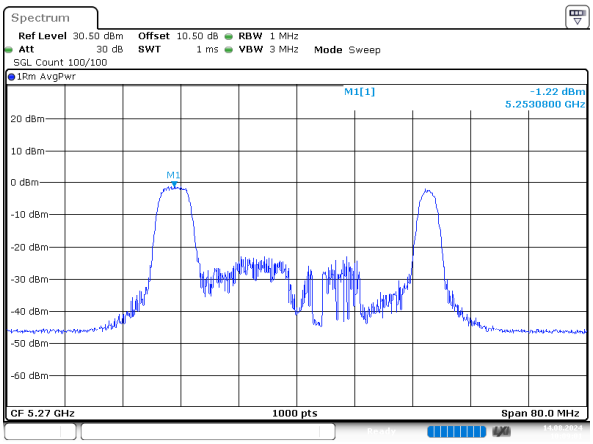

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:09:01

ax40_5270MHz_RU_106/53_Chain 1

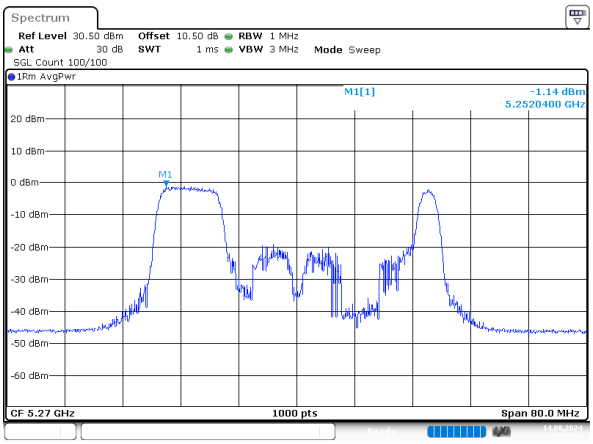

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:09:56

ax40_5270MHz_RU_242/61_Chain 1

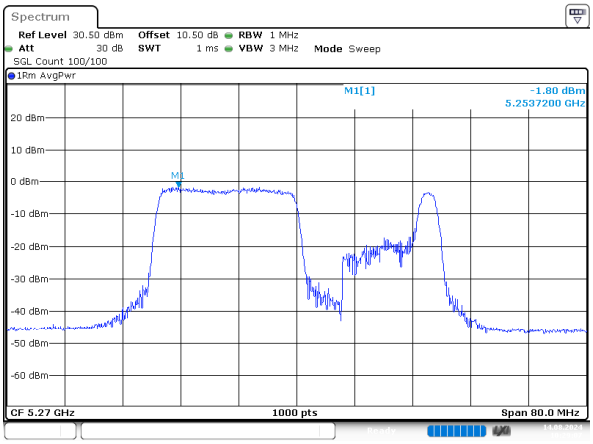

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:29:07

ax40_5270MHz_RU_484/65_Chain 1

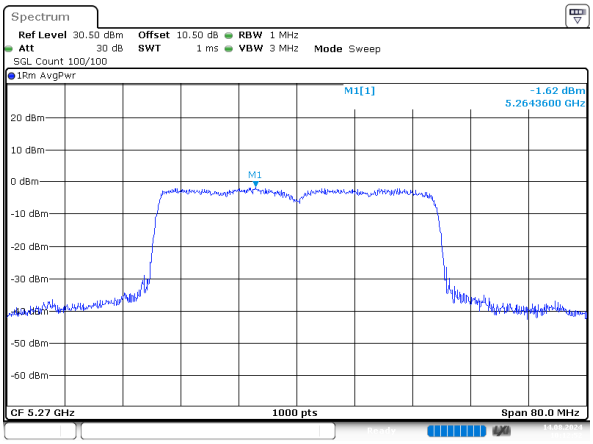

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 10:12:52

ax40_5310MHz_RU_26/17_Chain 0

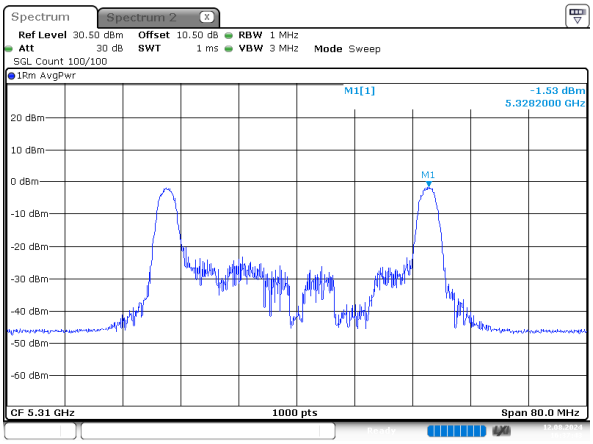

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:37:44

ax40_5310MHz_RU_52/44_Chain 0

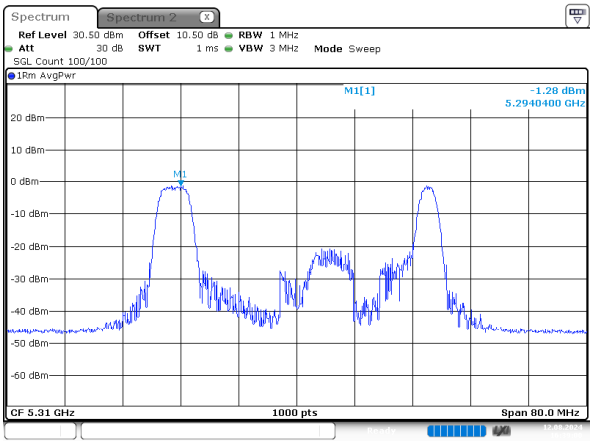

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:39:01

ax40_5310MHz_RU_106/56_Chain 0

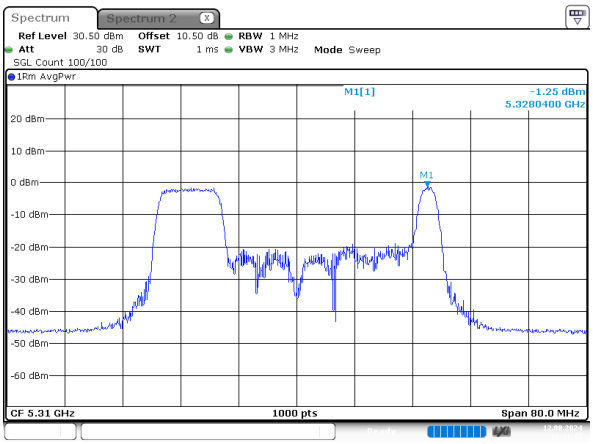

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:41:14

ax40_5310MHz_RU_242/62_Chain 0

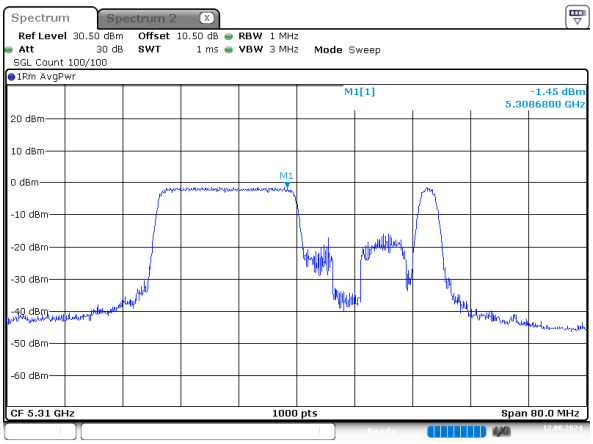

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:43:08

ax40_5310MHz_RU_484/65_Chain 0

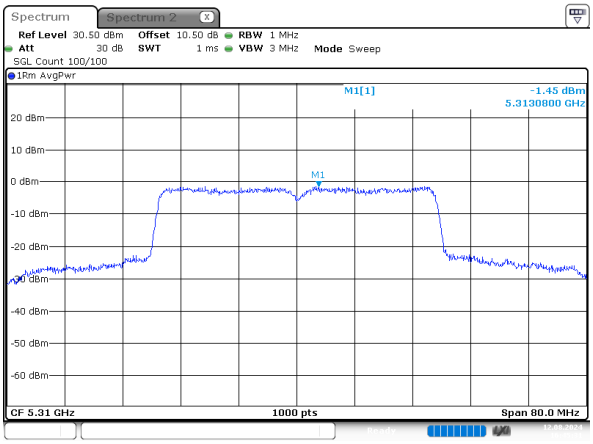

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 12.AUG.2024 16:45:32

ax40_5310MHz_RU_26/17_Chain 1

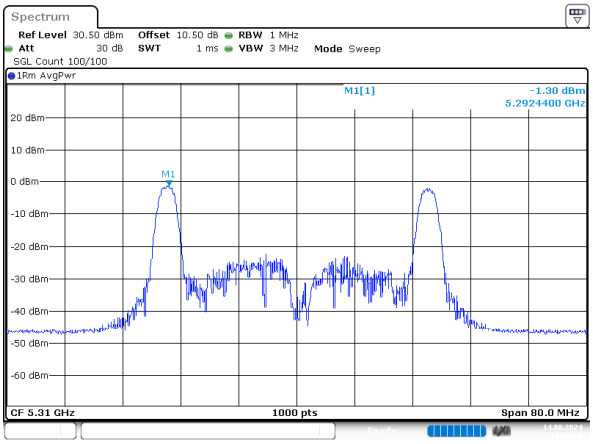

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:03:20

ax40_5310MHz_RU_52/44_Chain 1

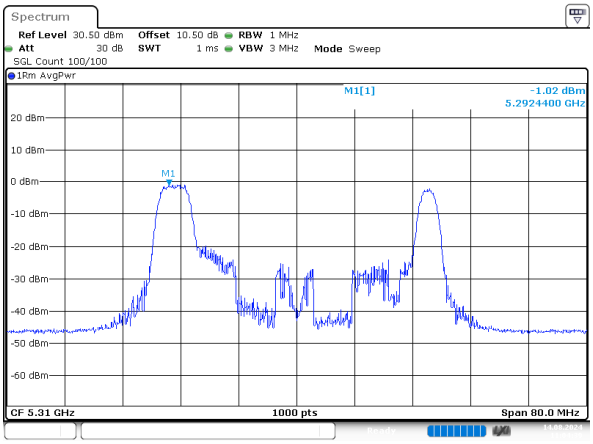

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:04:39

ax40_5310MHz_RU_106/56_Chain 1

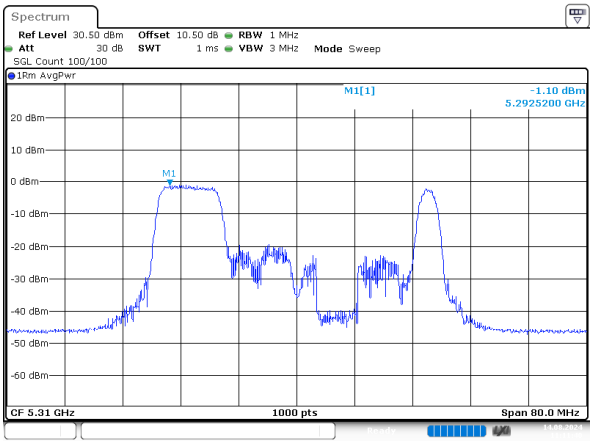

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:11:41

ax40_5310MHz_RU_242/62_Chain 1

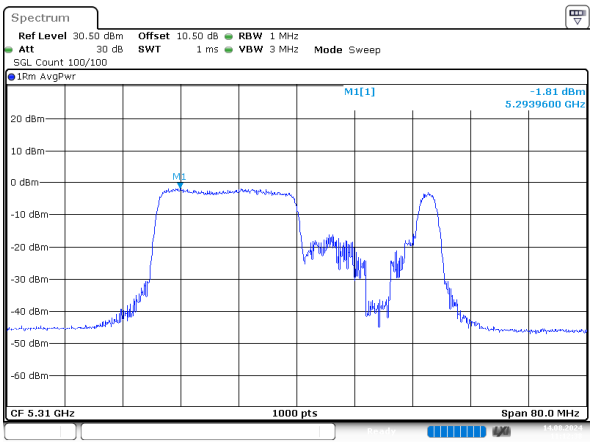

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:12:38

ax40_5310MHz_RU_484/65_Chain 1

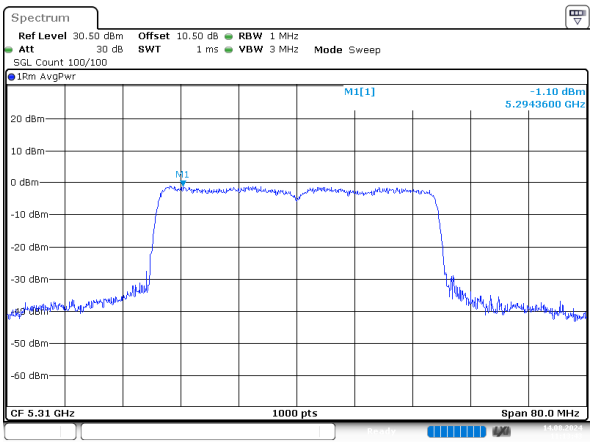

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:13:43

ax80_5290MHz_RU_26/0_Chain 0

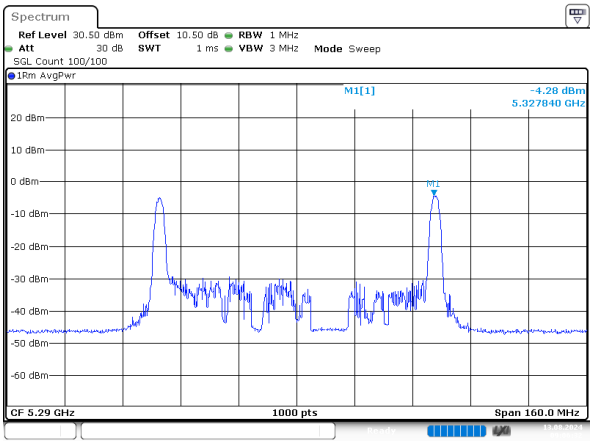

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 09:06:32

ax80_5290MHz_RU_52/37_Chain 0

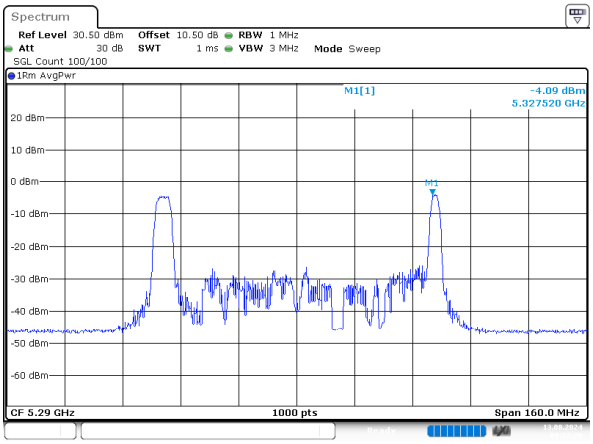

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 09:22:20

ax80_5290MHz_RU_106/53_Chain 0

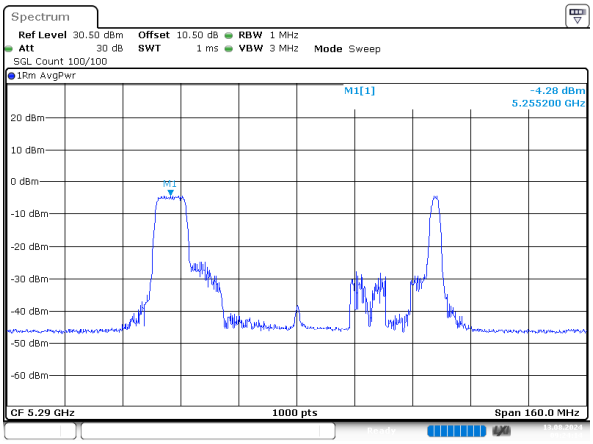

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 09:24:14

ax80_5290MHz_RU_242/61_Chain 0

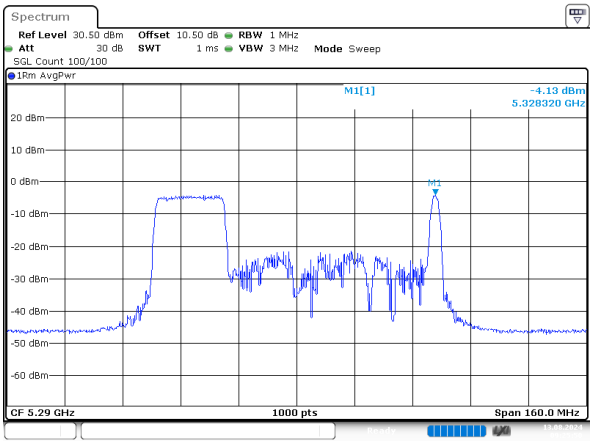

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 09:25:50

ax80_5290MHz_RU_484/65_Chain 0

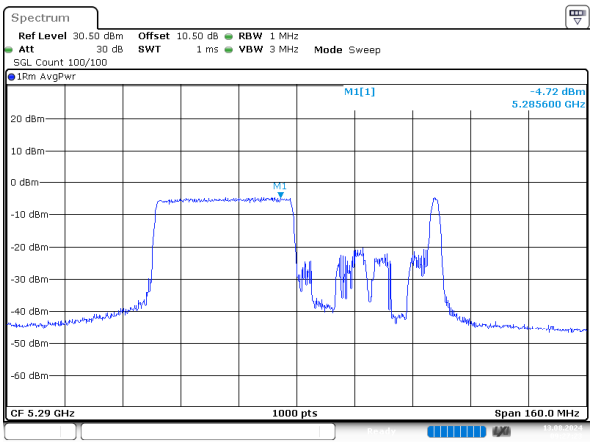

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 09:27:23

ax80_5290MHz_RU_996/67_Chain 0

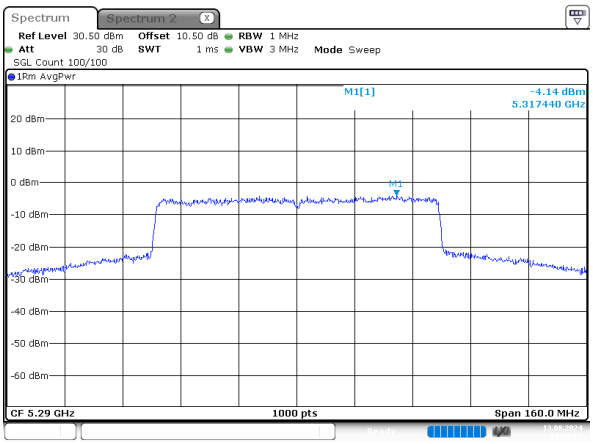

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 13.AUG.2024 08:59:21

ax80_5290MHz_RU_26/0_Chain 1

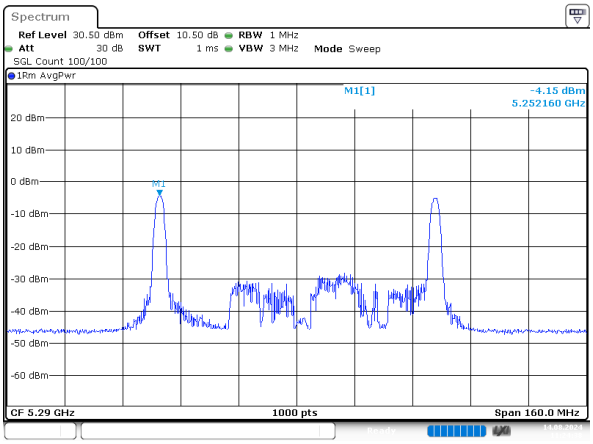

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:24:39

ax80_5290MHz_RU_52/37_Chain 1

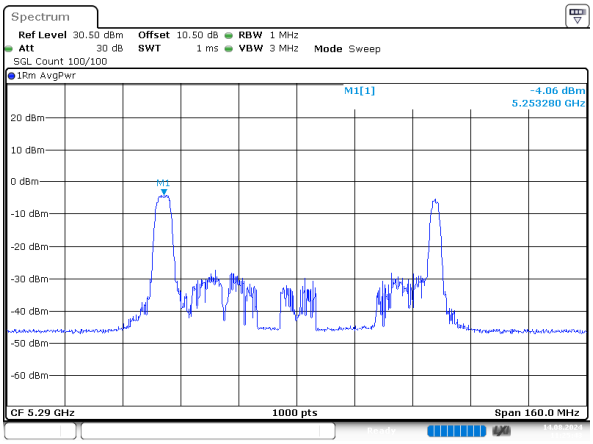

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:25:44

ax80_5290MHz_RU_106/53_Chain 1

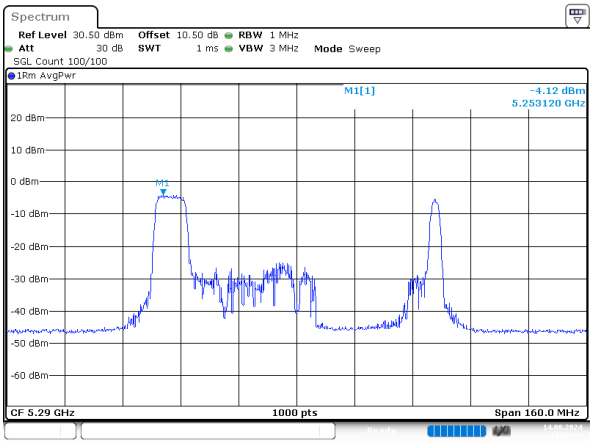

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:27:37

ax80_5290MHz_RU_242/61_Chain 1

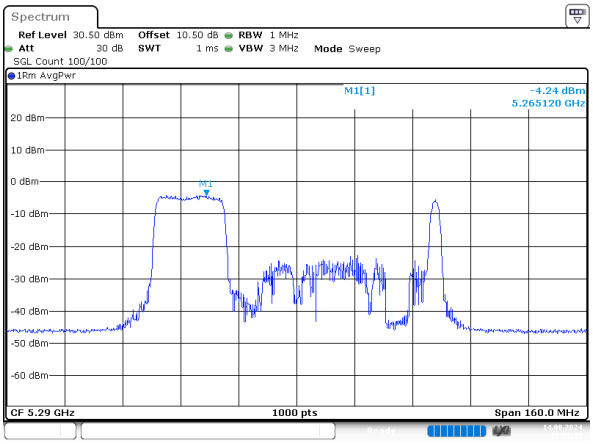

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:31:17

ax80_5290MHz_RU_484/65_Chain 1

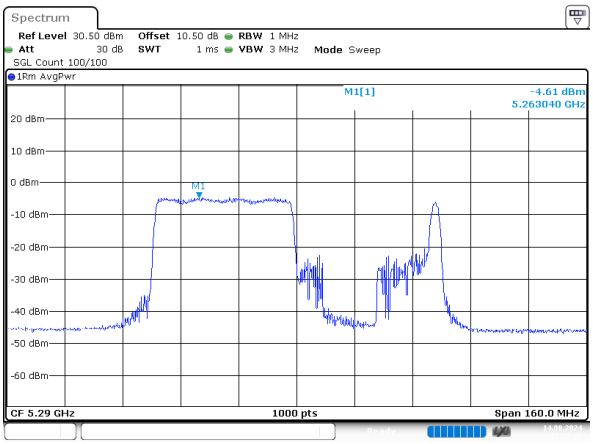

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:37:10

ax80_5290MHz_RU_996/67_Chain 1

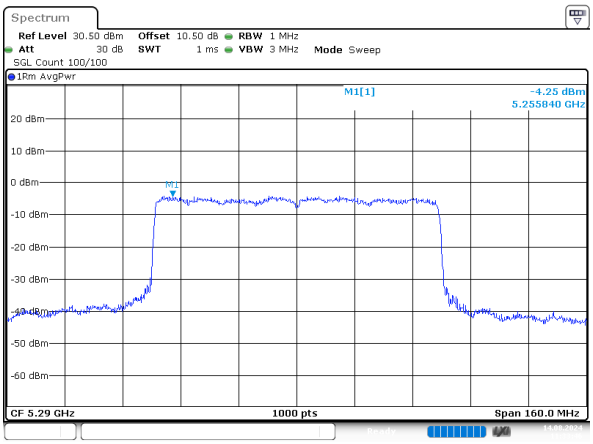

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 14.AUG.2024 11:33:46

5470-5725 MHz

a_5500MHz_Chain 0

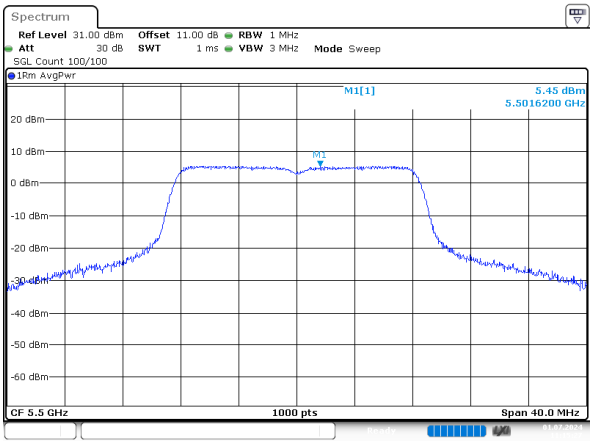

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:15:27

a_5500MHz_Chain 1

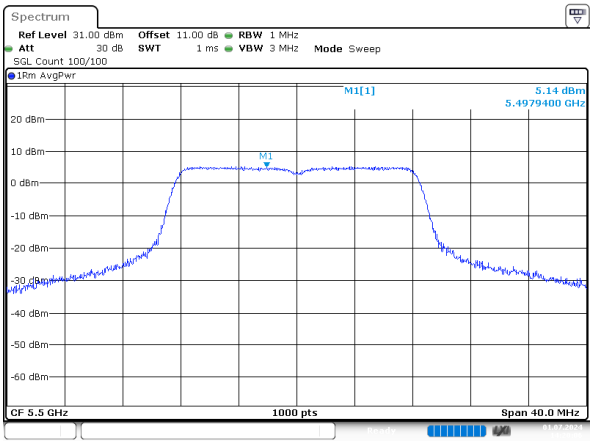

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:20:06

a_5580MHz_Chain 0

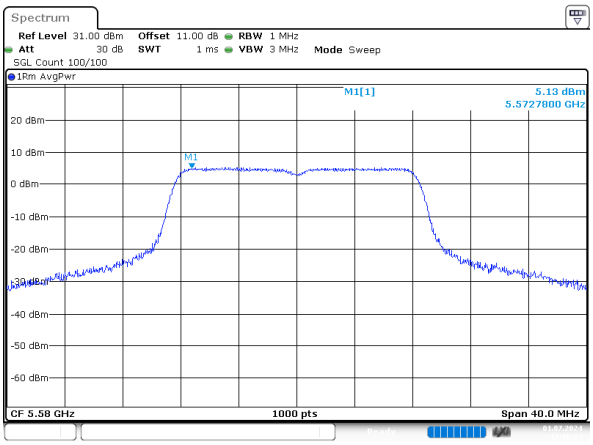

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:16:15

a_5580MHz_Chain 1

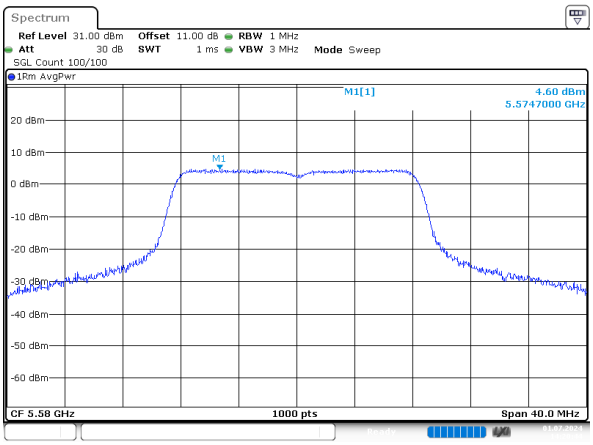

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:20:44

a_5700MHz_Chain 0

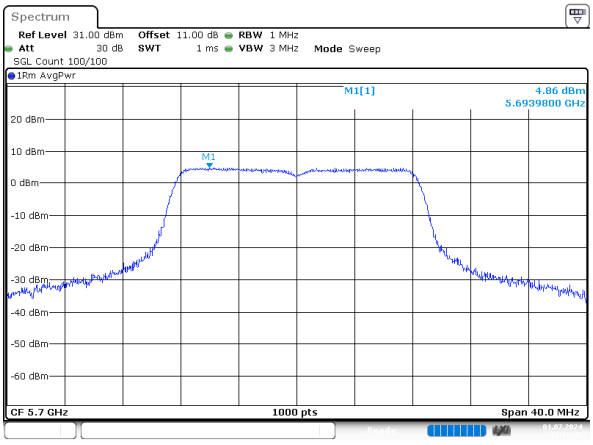

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:16:46

a_5700MHz_Chain 1

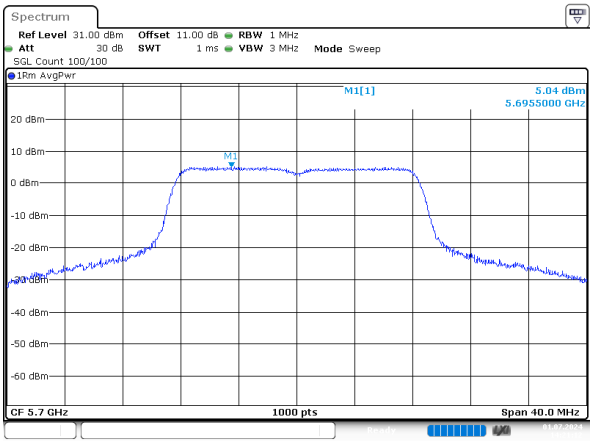

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:21:13

a_5720MHz_Chain 0

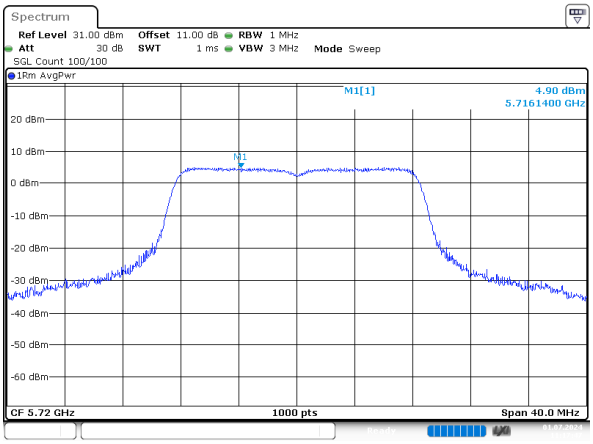

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:17:48

a_5720MHz_Chain 1

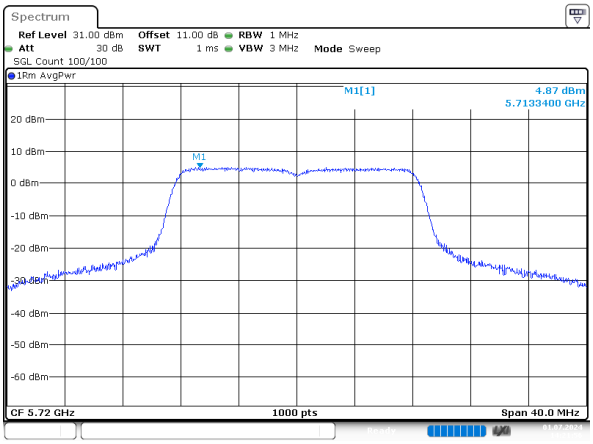

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:21:57

n20_5500MHz_Chain 0

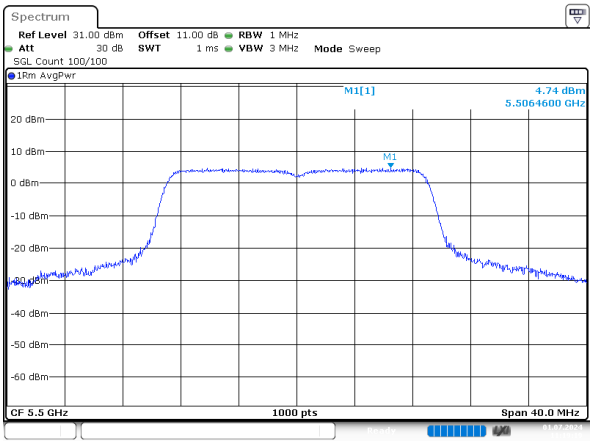

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:19:20

n20_5500MHz_Chain 1

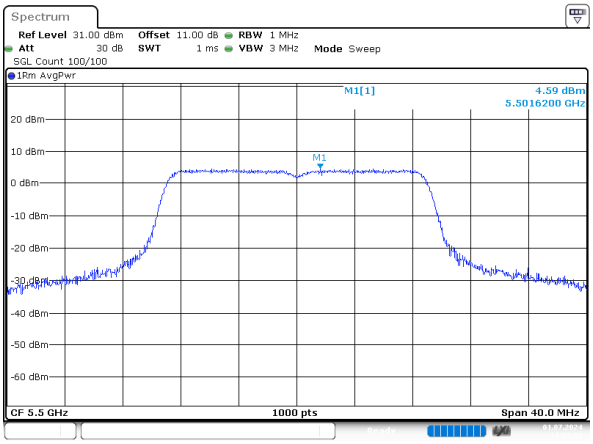

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:23:34

n20_5580MHz_Chain 0

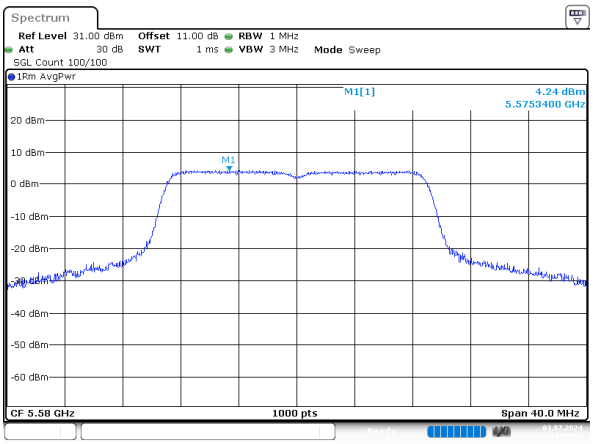

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:19:52

n20_5580MHz_Chain 1

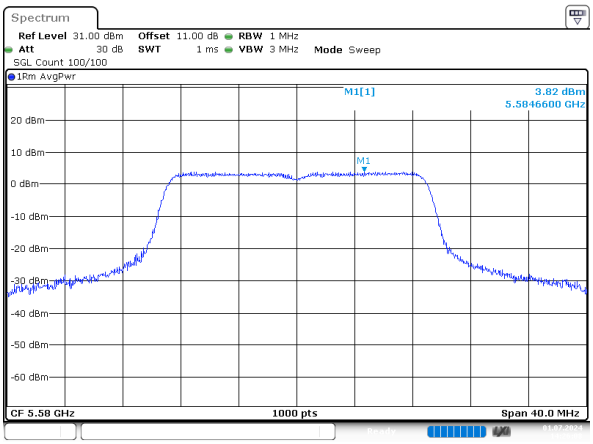

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:26:09

n20_5700MHz_Chain 0

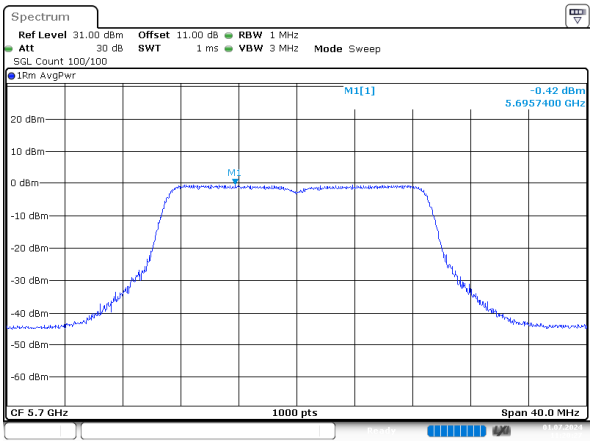

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:20:28

n20_5700MHz_Chain 1

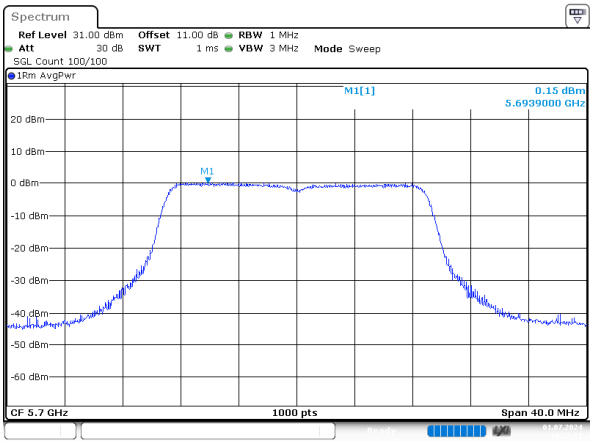

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:27:12

n20_5720MHz_Chain 0

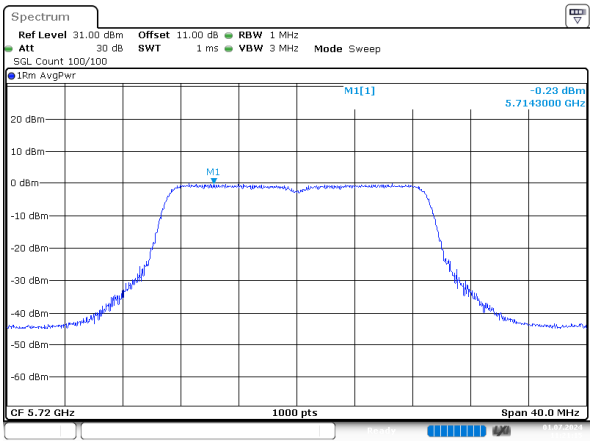

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:21:16

n20_5720MHz_Chain 1

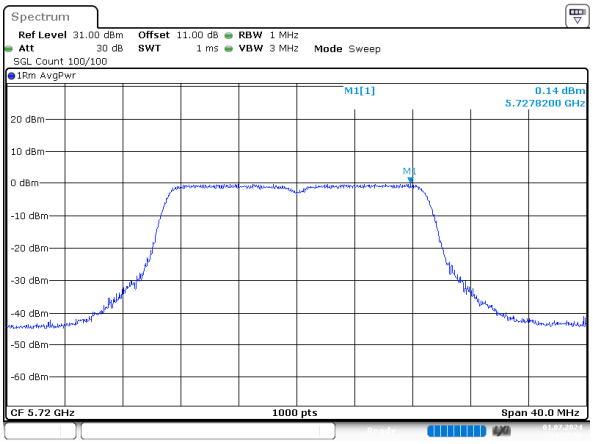

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:27:56

n40_5510MHz_Chain 0

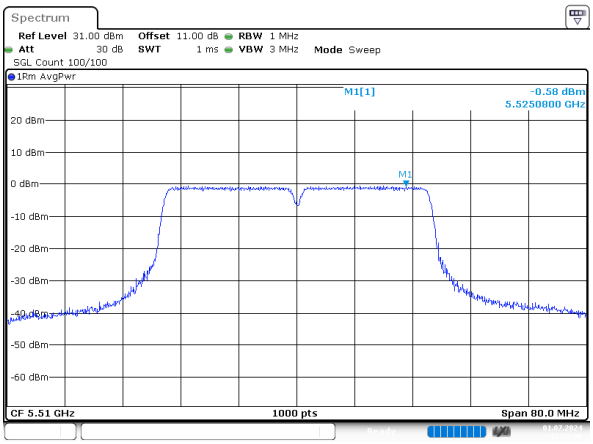

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 11:22:07

n40_5510MHz_Chain 1

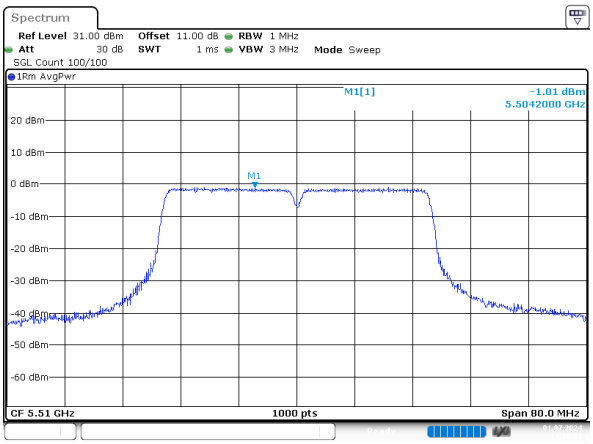

ProjectNo.:2402U80231E-RF-A1 Tester:Jojo Zhou
Date: 1.JUL.2024 14:30:17