

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 1 of 32

Applicant : Anitoa Biotechnology (Hangzhou) Co.,Ltd.
Address of Applicant : Room 210,2F,Building 2,No.658 binan Road,Changhe Street,Binjiang District,Hangzhou City,Zhejiang Province

Product Name : Real-time Fluorescence Quantitative PCR Instrument
Brand Name : anitoa
Model No. : MQ4164,MQ4041,MQ4042,MQ4043,MQ4044,MQ4081,MQ4082,MQ4083,MQ4084,MQ4161,MQ4162,MQ4163
Sample No. : H22020028-01#01 :
FCC ID : 2A7M7MQ4

Standards : FCC CFR47 Part 15, Subpart C

Date of Receipt : 2022-05-20
Date of Test : 2022-05-21 ~ 2022-06-08
Date of Issue : 2022-06-13

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product.

Prepared by:



(Erik Yang)

Reviewed by:



(Jennifer Zhou)

Approved by:



(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 2 of 32

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
1.4	TEST METHODOLOGY	4
1.5	TEST SUMMARY	4
2	TEST CONDITION	5
2.1	ENVIRONMENTAL CONDITIONS	5
2.2	EQUIPMENT LIST	5
2.3	MEASUREMENT UNCERTAINTY	5
3	TEST SET-UP AND OPERATION MODES	6
3.1	DETAILS OF TEST MODE	6
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	6
3.3	SUPPORT SOFTWARE	6
3.4	TEST SETUP DIAGRAM	7
4	TEST RESULTS	9
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	9
4.1.1	<i>Antenna Requirement</i>	9
4.1.2	<i>Peak Output Power</i>	10
4.1.3	<i>6dB Bandwidth and 99% Bandwidth</i>	13
4.1.4	<i>Power Spectral Density</i>	16
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge</i>	19
4.1.6	<i>Radiated Spurious Emission</i>	25
4.1.7	<i>Band Edge (Restricted-band band-edge)</i>	26
4.2	MAINS EMISSIONS	27
4.2.1	<i>Conducted Emission on AC Mains</i>	27
5	APPENDIXES	30
5.1	PHOTOGRAPHS OF THE SAMPLE	30
5.2	SET-UP FOR CONDUCTED EMISSIONS	31
5.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	31
5.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	32
5.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	32

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 3 of 32

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298 Pingan Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	Anitoe Biotechnology (Hangzhou) Co.,Ltd.
Address	Room 210,2F,Building 2,No.658 binan Road,Changhe Street,Binjiang District,Hangzhou City,Zhejiang Province
Contact Person	Xu.Bai
Telephone	13616528058
Email	xu.bai@artobio.cn
Manufacturer Company Name	Anitoe Biotechnology (Hangzhou) Co.,Ltd.
Address	Room 210,2F,Building 2,No.658 binan Road,Changhe Street,Binjiang District,Hangzhou City,Zhejiang Province
Factory Company Name	Anitoe Biotechnology (Hangzhou) Co.,Ltd.
Address	Room 210,2F,Building 2,No.658 binan Road,Changhe Street,Binjiang District,Hangzhou City,Zhejiang Province

1.3 Details of EUT

Product Name	Real-time Fluorescence Quantitative PCR Instrument
Brand Name	anitoa
Test Model No.	MQ4164
Series Model No.	MQ4041,MQ4042,MQ4043,MQ4044,MQ4081,MQ4082,MQ4083,MQ4084,MQ4161,MQ4162,MQ4163
Difference Description	All the models are identical with the same schematics, PCB layout, structure, size and components, the difference are only quantities in fluorescence channel and check holes
FCC ID	2A7M7MQ4
Mode of Operation	Bluetooth BLE
Frequency Range	2400MHz ~ 2483.5MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	GFSK
Antenna Type	Internal Antenna
Antenna Gain	2dBi
Test Voltage	AC 120V 60Hz by Switching adapter (Model: GST160A15)
Extreme Voltage	Low Voltage: AC 100V by Switching adapter (Model: GST160A15)

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 4 of 32

	High Voltage: AC 240V by Switching adapter (Model: GST160A15)
Hardware version	MQ_05_V10.3
Software version	V1.7.2.2
RF power setting in TEST SW	Engineer Mode

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	Part 15.247 Meas Guidance
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	PASS
Peak Output Power	FCC Part 15.247(b)(3)	PASS
6dB Bandwidth	FCC Part 15.247(a)(2)	PASS
Power Spectral Density	FCC Part 15.247(e)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Spurious Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 5 of 32

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2021-08-17	2022-08-16
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2021-06-10	2022-06-09
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2021-06-10	2022-06-09
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2021-06-10	2022-06-09
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-06-10	2022-06-09
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2021-08-13	2022-08-12
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2021-06-08	2023-06-07
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2021-06-08	2023-06-07
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2021-06-12	2022-06-11
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2020-11-23	2022-11-22
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-09	2023-06-08
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-06-09	2023-06-08
Test Software	BL	BL410_E	N/A	N/A	N/A
Test Software	BL	BL410_R	N/A	N/A	N/A

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3.42 dB
	> 1GHz	± 4.20 dB
Conducted Emission on AC Mains	9 kHz to 30 MHz	± 1.71 dB

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 6 of 32

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software(Engineer Mode) was control EUT work in continuous transmitter and receiver mode.

Select test channel as below:

Channel	Frequency
The lowest channel(CH0)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Switching Adapter	N/A	GST160A15	1.00m Unshielded

3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Engineer Mode

TEST REPORT


Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 7 of 32


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Measurement

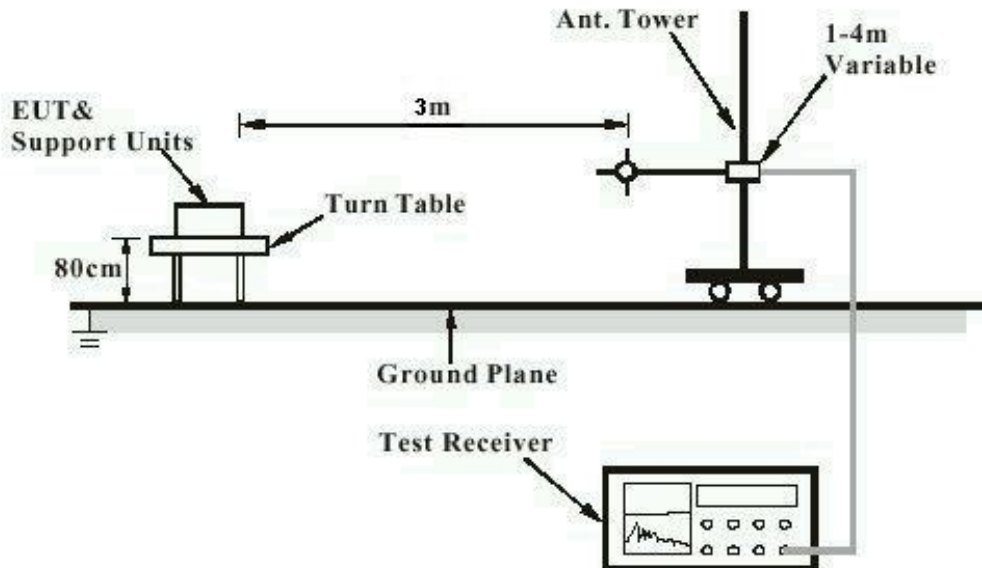

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Conduction Measurement

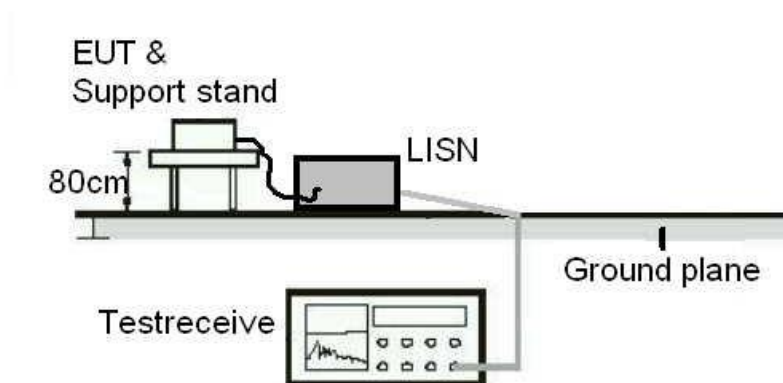


TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 8 of 32

Diagram of Measurement Configuration for Transmitter Measurement

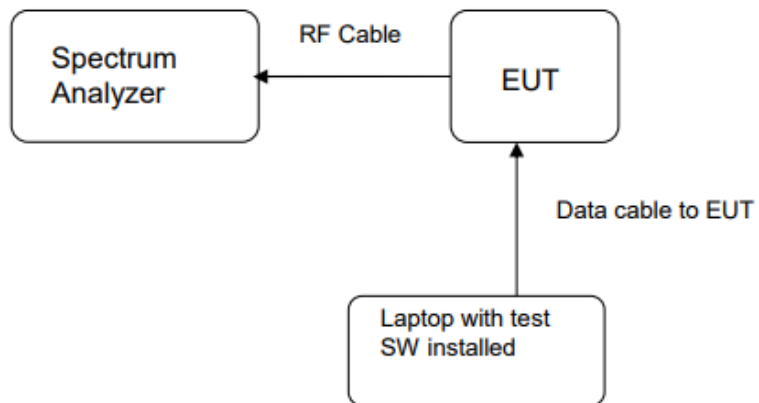

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 9 of 32

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.247(b)(4), Part 15.203
Requirement	: The use of approved antennas only with directional gains that do not exceed 6dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 10 of 32

4.1.2 Peak Output Power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.8°C
Relative humidity : 52%

Table 1: Peak Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
BLE	2402	5.47	3.52	≤ 1
	2440	5.36	3.44	
	2480	5.37	3.44	

TEST REPORT

Report No.: SHH22020028-01AE Date: 2022-06-13 Page 11 of 32

Figure 1: Peak Output Power, 2402MHz


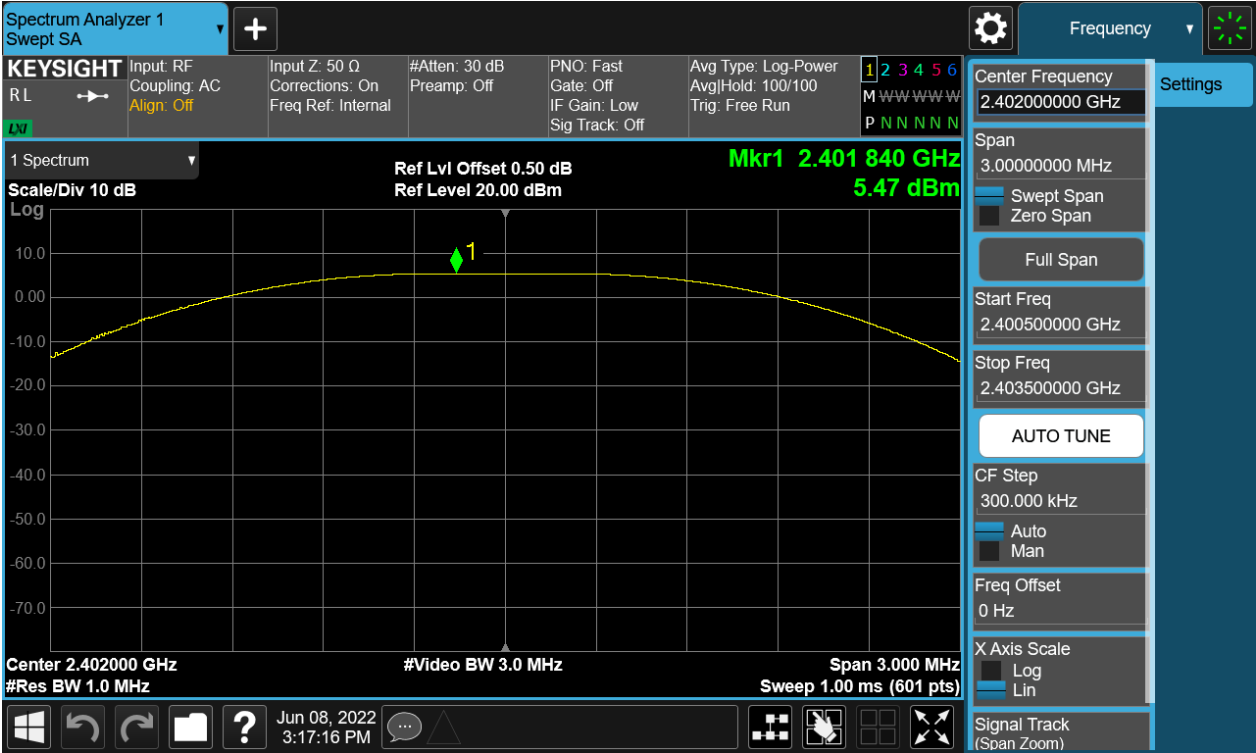


Figure 2: Peak Output Power, 2440MHz

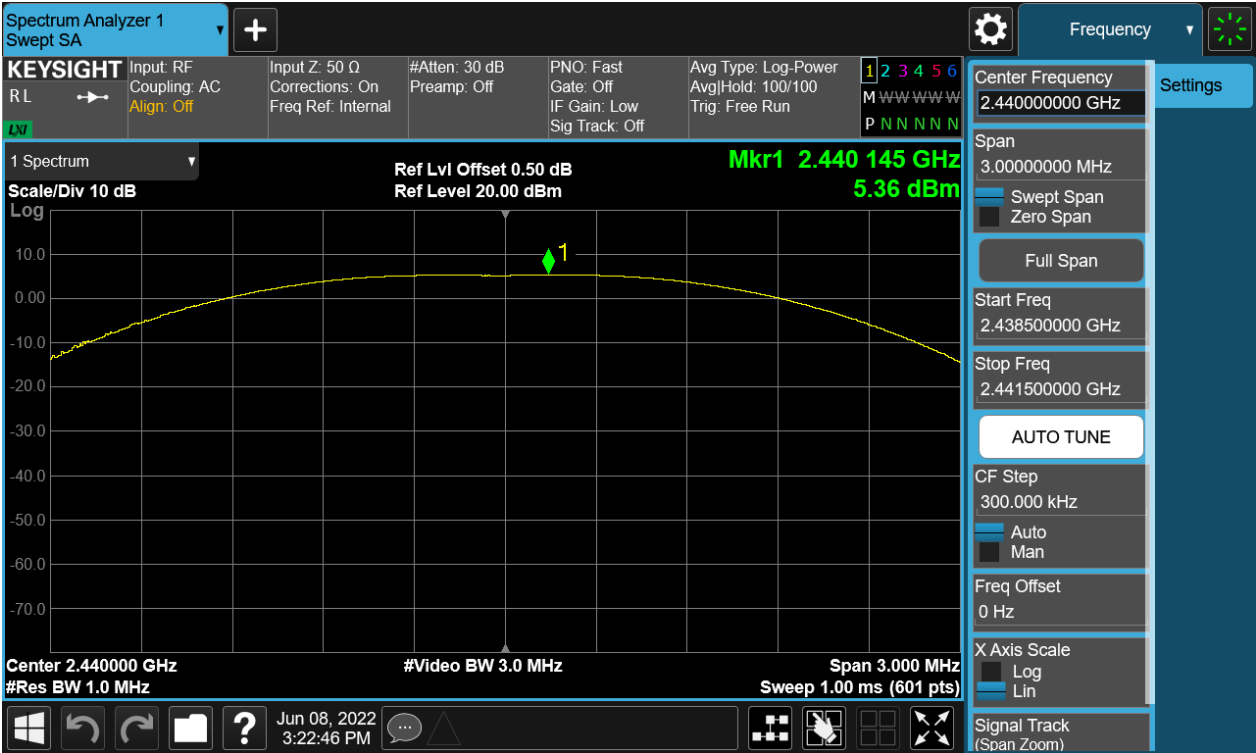


TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 12 of 32

Figure 3: Peak Output Power, 2480MHz

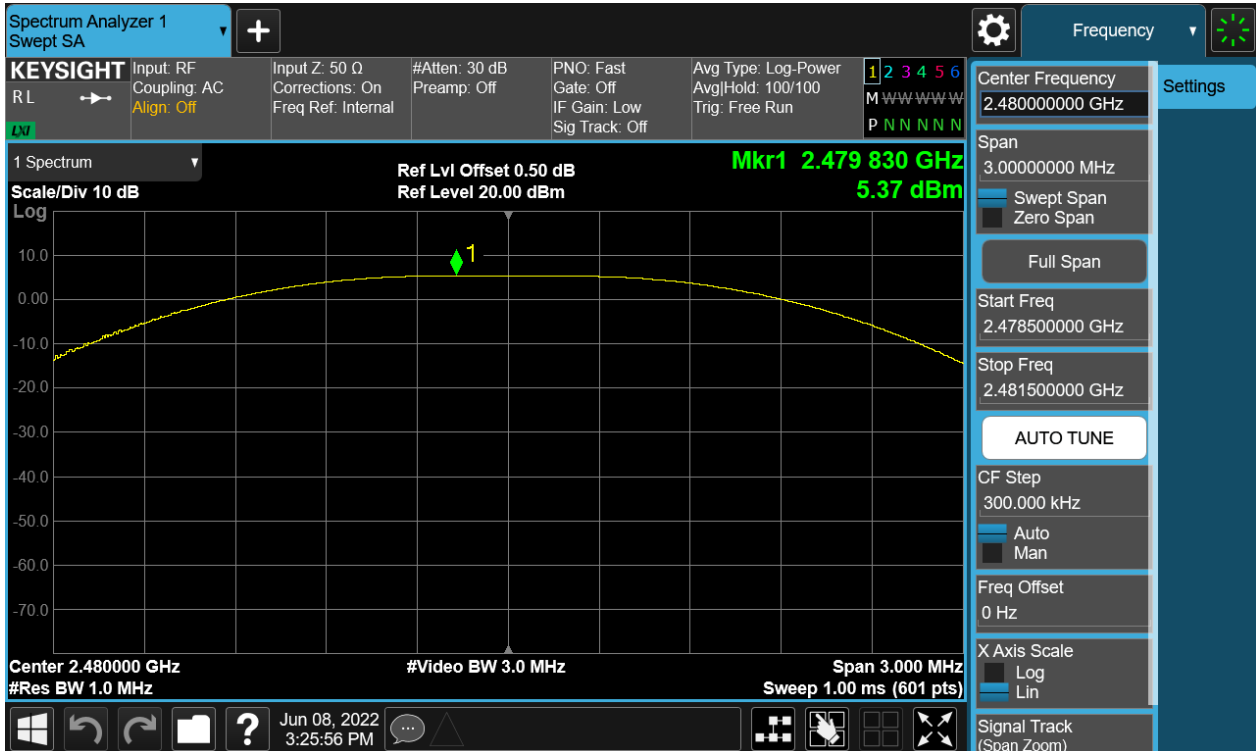

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 13 of 32

4.1.3 6dB Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.8°C
Relative humidity : 52%

Table 2: 6dB Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit
BLE	2402	0.7005	≥ 0.5 MHz
	2440	0.6419	
	2480	0.7008	

TEST REPORT

Report No.: SHH22020028-01AE Date: 2022-06-13 Page 14 of 32

Figure 4: 6dB Bandwidth, 2402MHz



Figure 5: 6dB Bandwidth, 2440MHz



TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 15 of 32

Figure 6: 6dB Bandwidth, 2480MHz



TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 16 of 32

4.1.4 Power Spectral Density

RESULT:

PASS

Test standard : FCC Part 15.247(e)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.8°C
Relative humidity : 52%

Table 3: Power Spectral Density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
BLE	2402	-9.87	≤ 8
	2440	-10.04	
	2480	-10.28	

TEST REPORT

Report No.: SHH22020028-01AE Date: 2022-06-13 Page 17 of 32

Figure 7: Power Spectral Density, 2402MHz


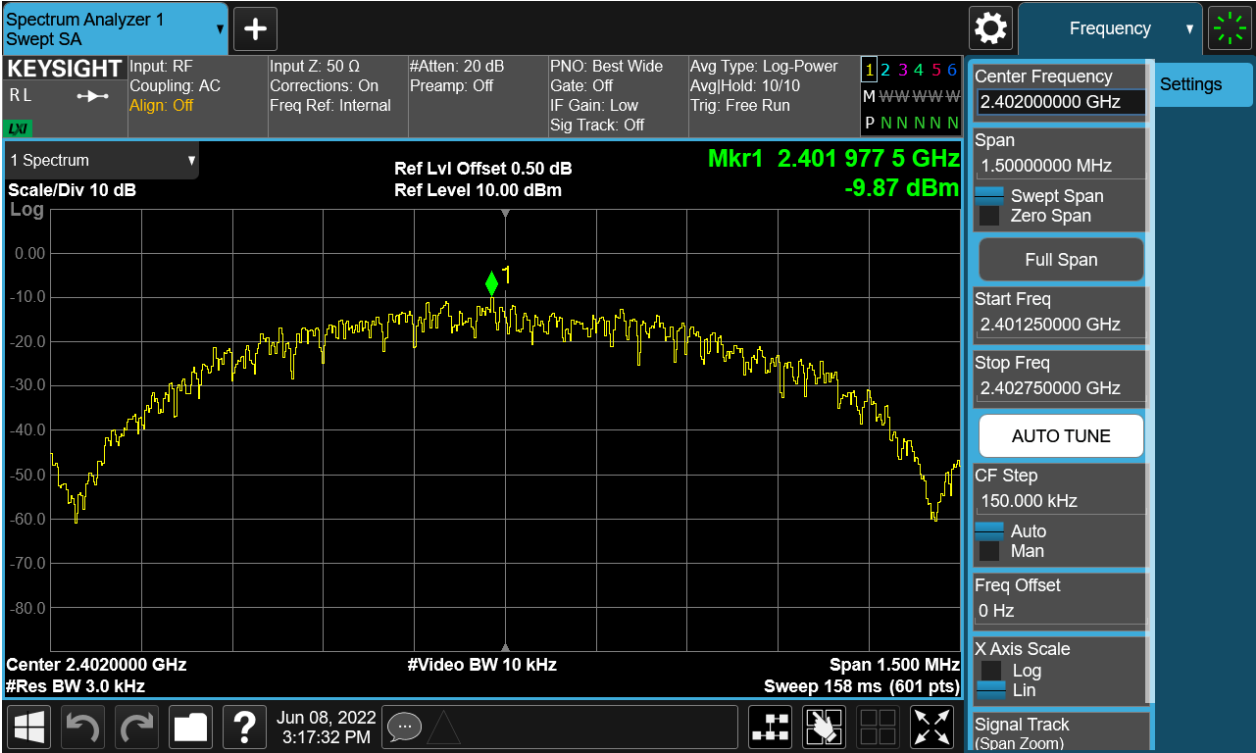


Figure 8: Power Spectral Density, 2440MHz

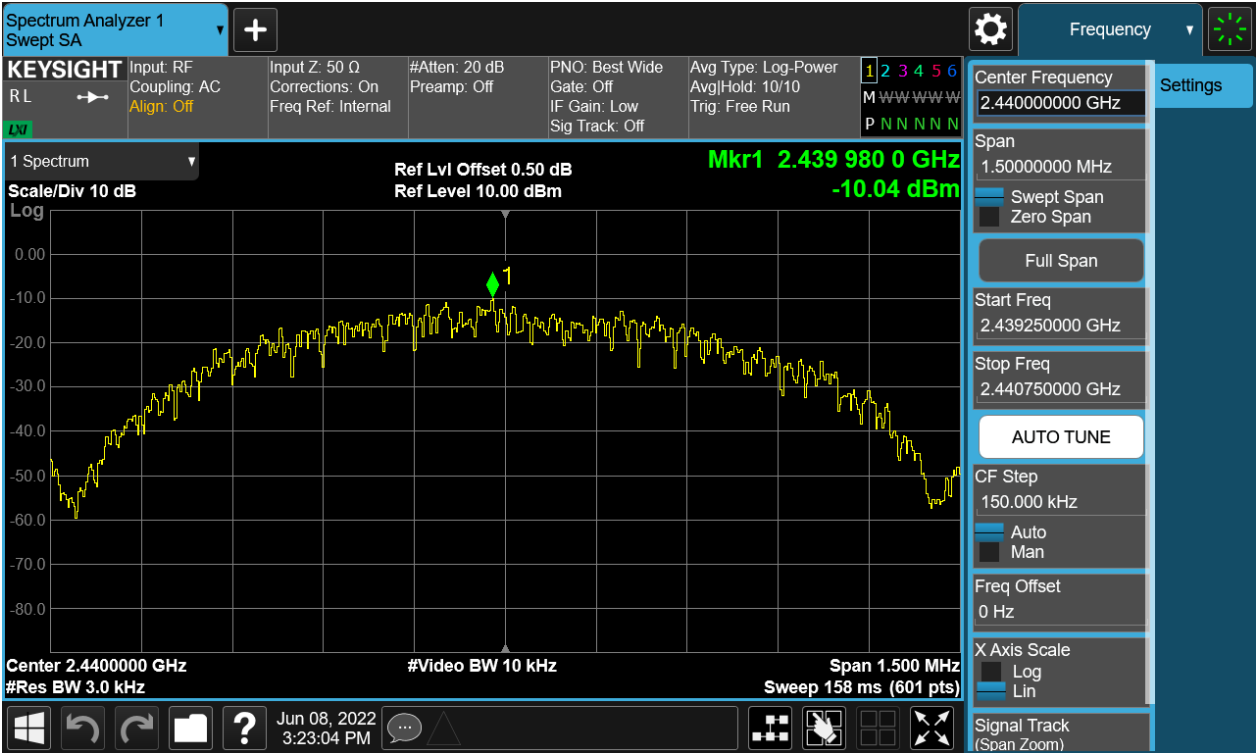


TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 18 of 32

Figure 9: Power Spectral Density, 2480MHz

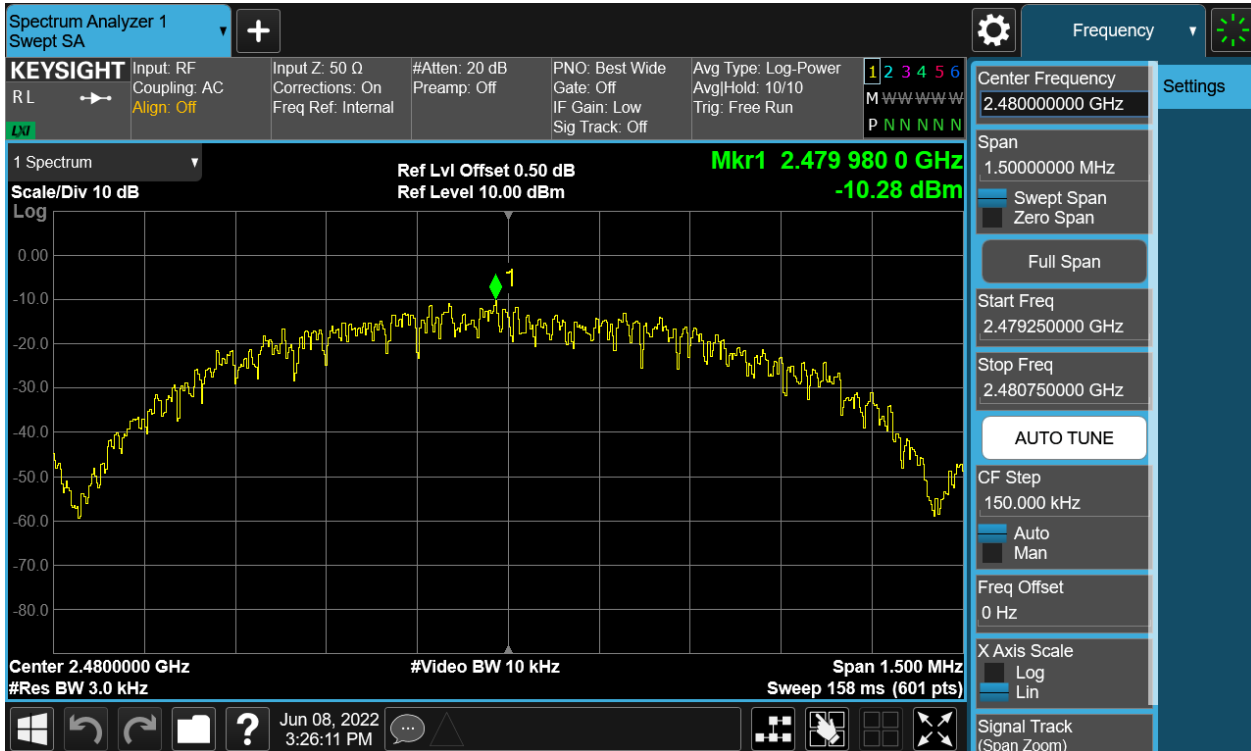

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 19 of 32

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS


Test standard : FCC Part 15.247(d)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High for spurious, Low/High for Band Edge
Operation Mode : A.1.a
Ambient temperature : 24.8°C
Relative humidity : 52%

For details refer to following test plot.

Figure 10: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE Carrier Level

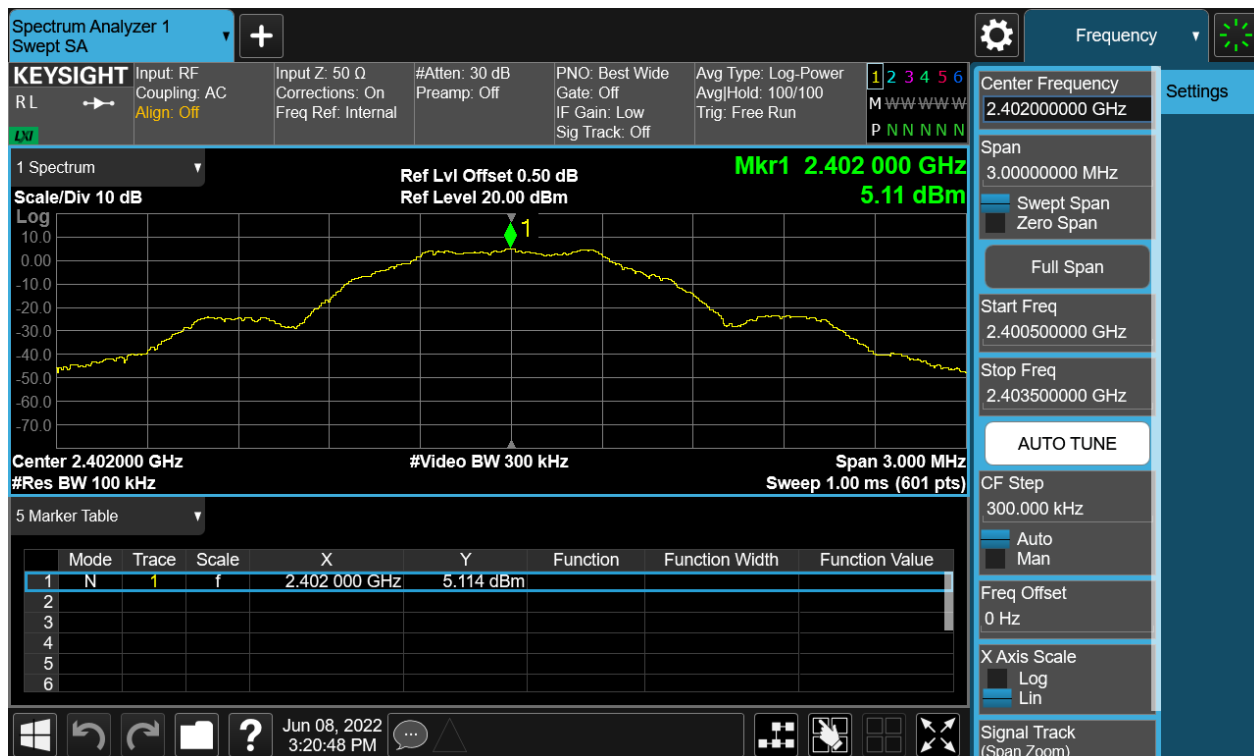

TEST REPORT

Report No.:


SHH22020028-01AE

Date:


2022-06-13

Page 20 of 32

Band Edge

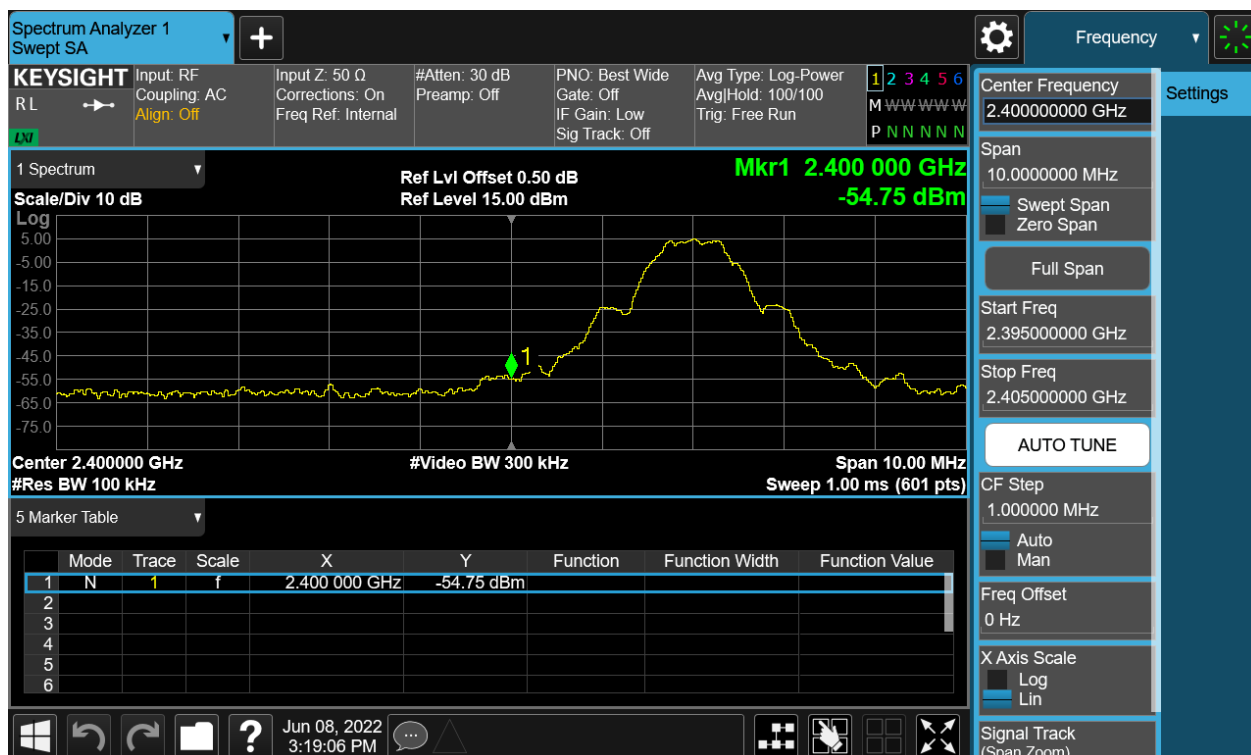

Conducted spurious emissions 30MHz-25GHz

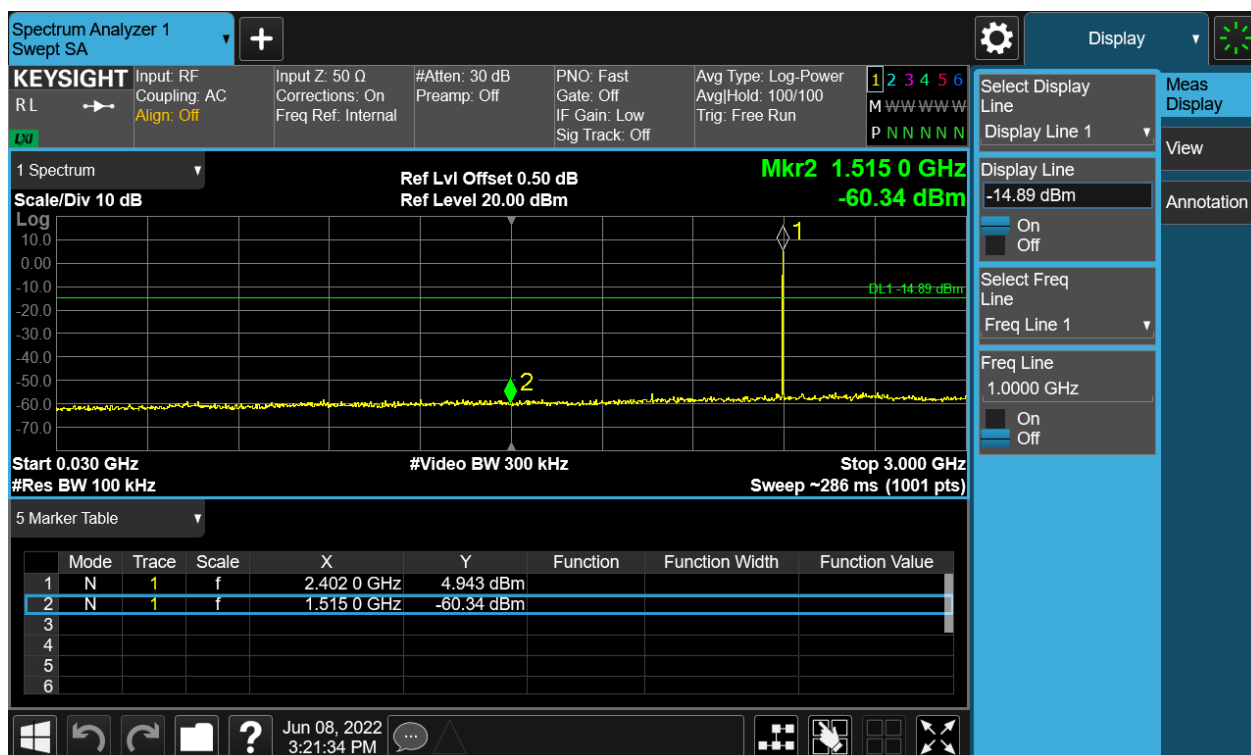

TEST REPORT

Report No.: SHH22020028-01AE Date: 2022-06-13 Page 21 of 32

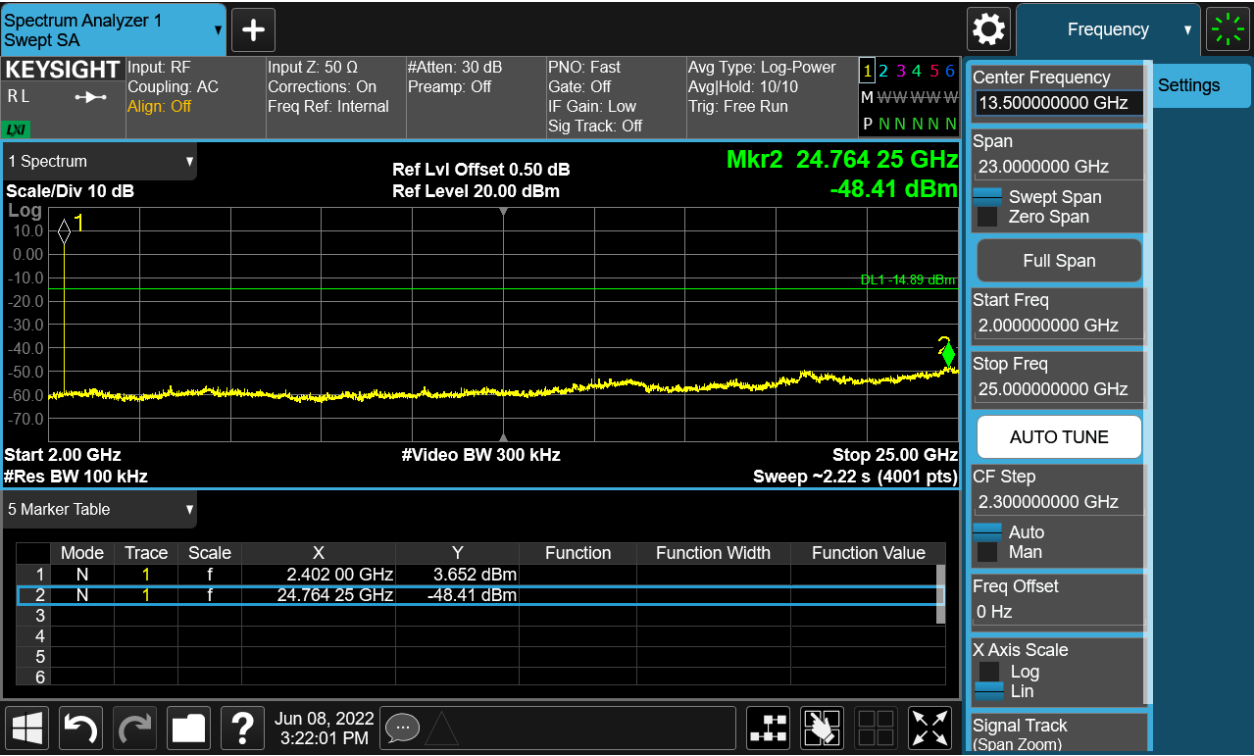


Figure 11: Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE Carrier Level



TEST REPORT

Report No.:



SHH22020028-01AE

Date:

2022-06-13

Page 22 of 32

Conducted spurious emissions 30MHz-25GHz

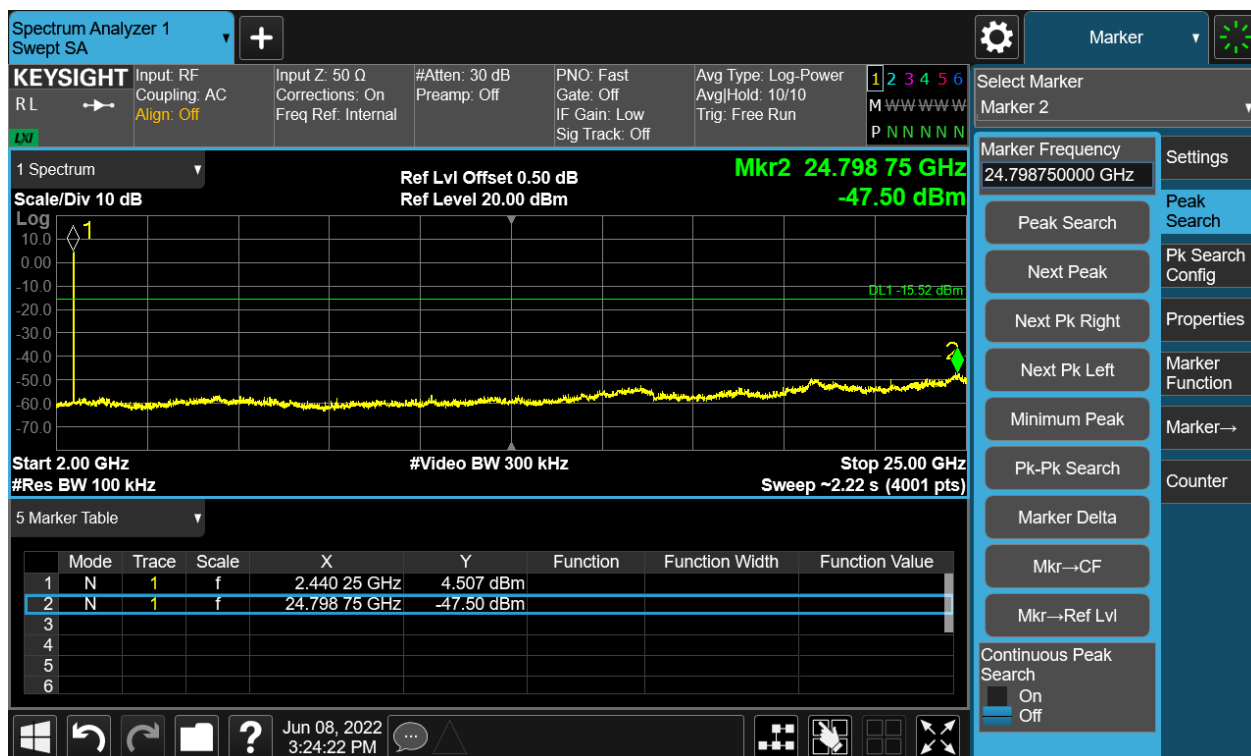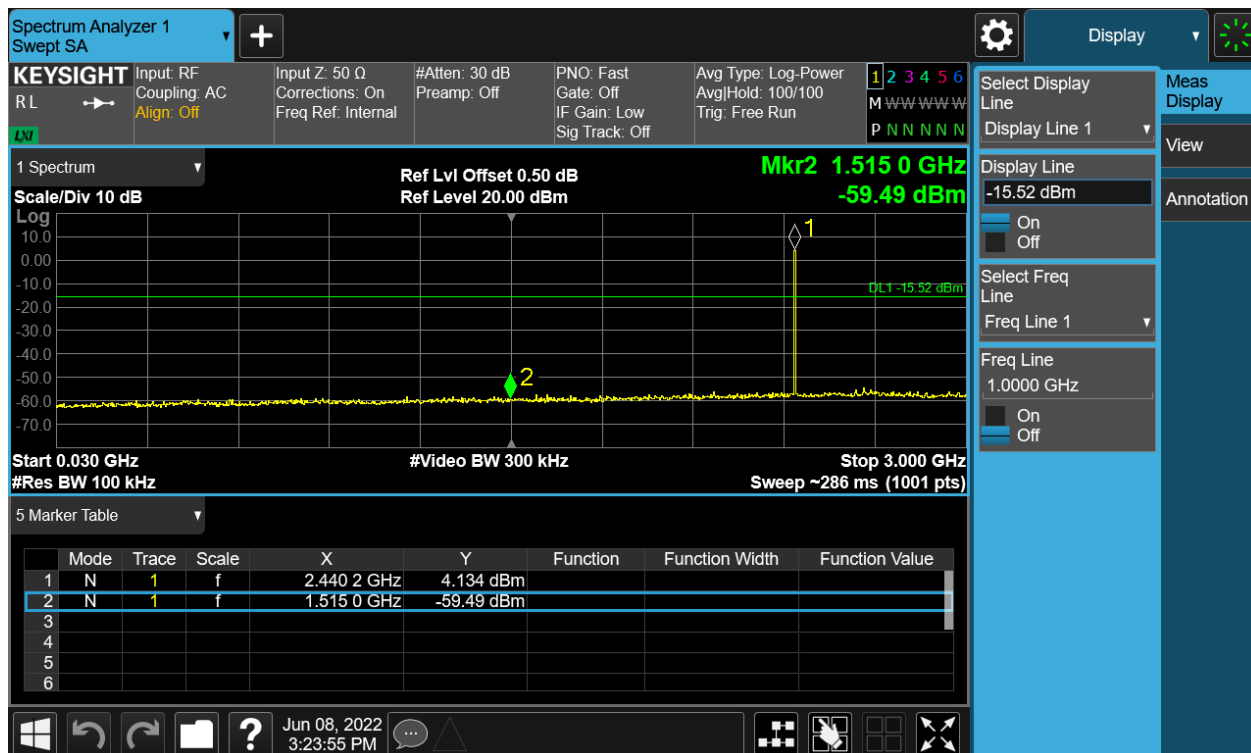


TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 23 of 32

Figure 12: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE Carrier Level

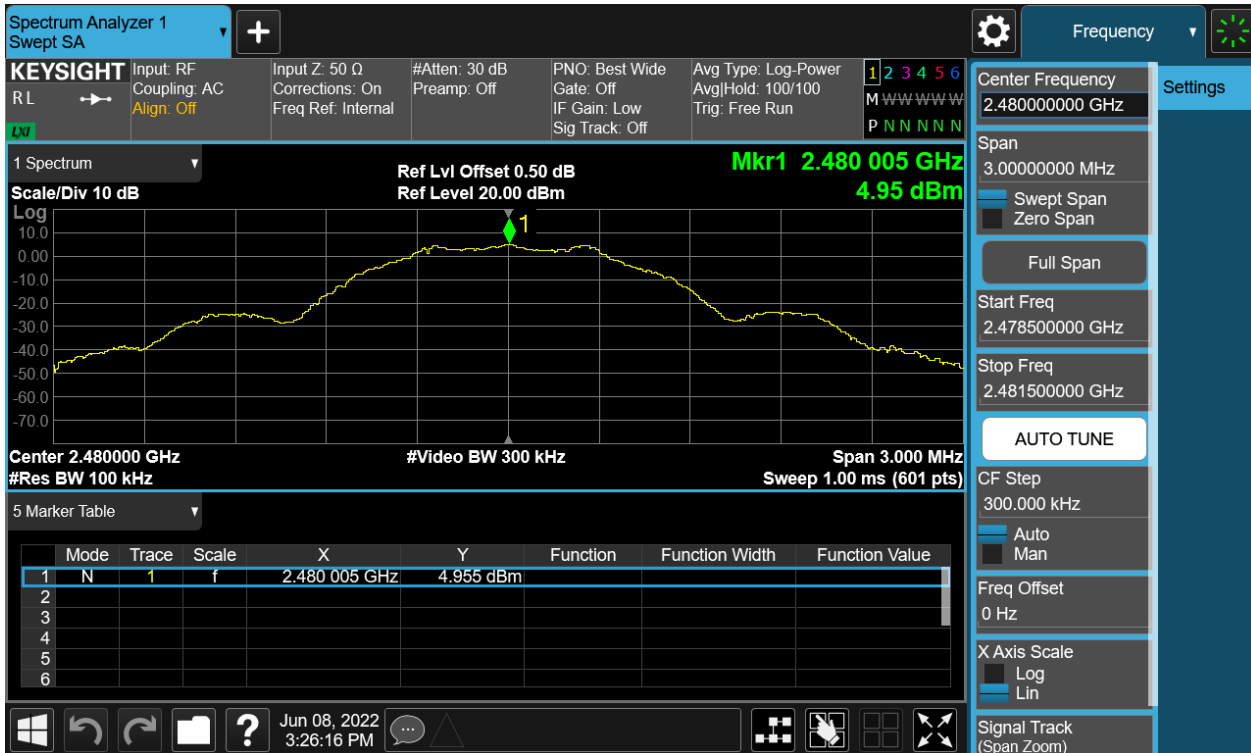

Band Edge



TEST REPORT

Report No.:



SHH22020028-01AE

Date:

2022-06-13

Page 24 of 32

Conducted spurious emissions 30MHz-25GHz

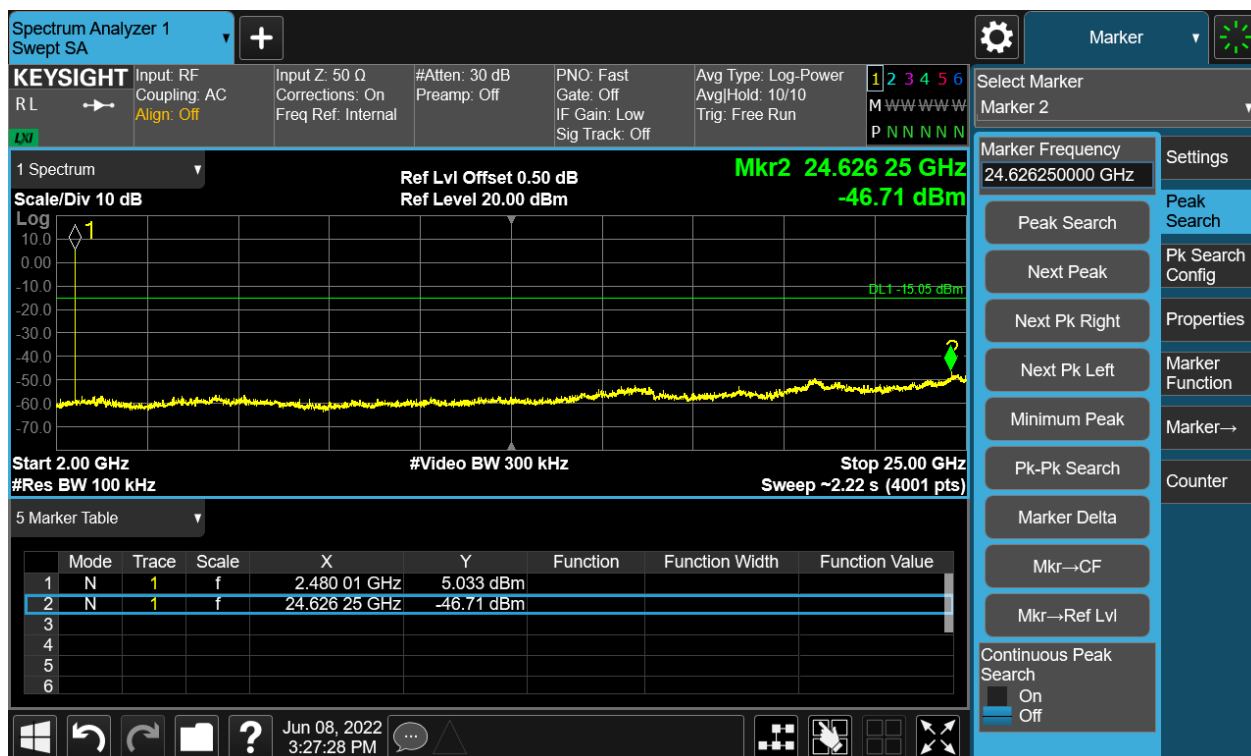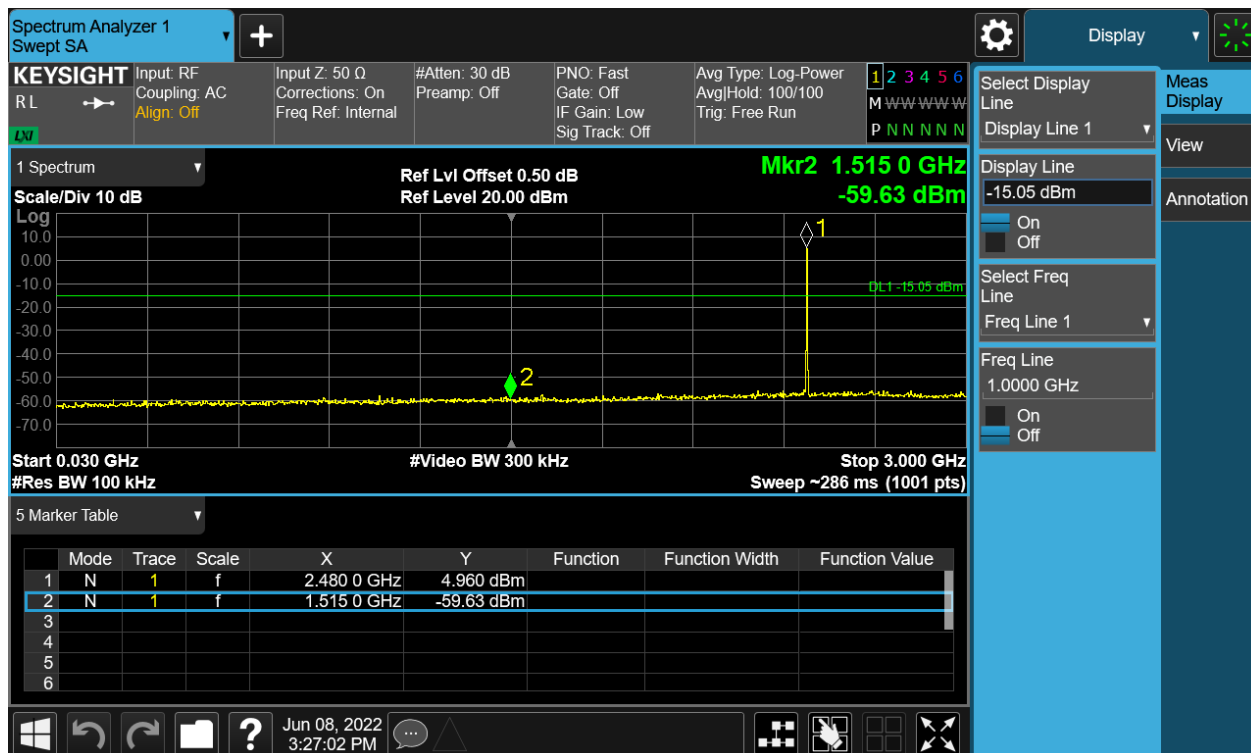

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 25 of 32

4.1.6 Radiated Spurious Emission

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A
Ambient temperature	: 23°C
Relative humidity	: 54%

Notes

Test plots please refer to the annex document "SHH22020028-01AE DATA BLE-TX EXHIBIT A".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. All test modes had been pre-test below 1 GHz, Only the worst mode data of transmitting-low channel was recorded in the report.
4. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 26 of 32

4.1.7 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 23°C
Relative humidity	: 54%

Notes

Test plots please refer to the annex document "SHH22020028-01AE DATA BLE-TX EXHIBIT A".

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 27 of 32

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a)
Requirement	: ANSI C63.10-2013
Kind of test site	: Shielded room

Test setup

Input Voltage	: AC 120V, 60Hz
Operation Mode	: A.2
Earthing	: Not Connected
Ambient temperature	: 23°C
Relative humidity	: 51%

For details refer to following test plot.

TEST REPORT


Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 28 of 32

Note: The all configurations were tested respectively, but only the worst configuration(Transmitting-low channel) shown here.

Figure 13: Conducted Emission on AC Mains, L Phase

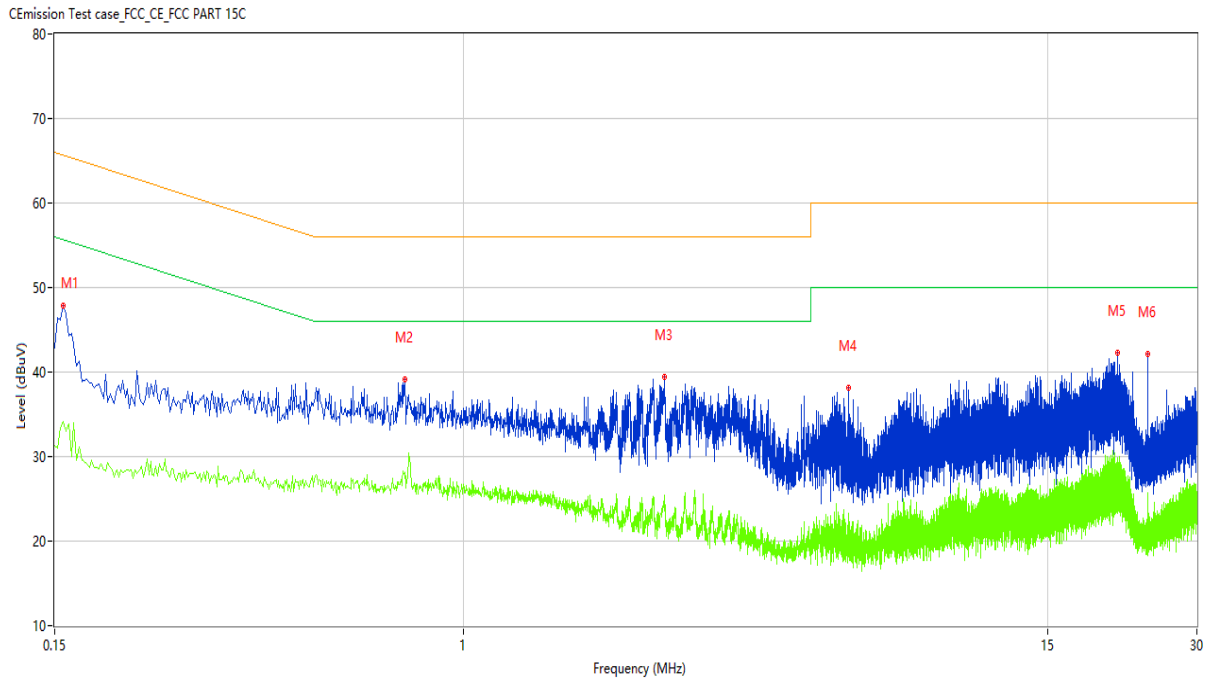

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	46.84	10.26	66.00	-19.16	Peak	L	Pass
1*	0.150	40.53	10.26	66.00	-25.47	QP	L	Pass
1**	0.150	31.22	10.26	56.00	-24.78	AV	L	Pass
2	0.760	40.70	10.31	56.00	-15.30	Peak	L	Pass
2*	0.760	32.16	10.31	56.00	-23.84	QP	L	Pass
2**	0.760	28.19	10.31	46.00	-17.81	AV	L	Pass
3	2.542	38.30	10.16	56.00	-17.70	Peak	L	Pass
3*	2.542	34.94	10.16	56.00	-21.06	QP	L	Pass
3**	2.542	24.20	10.16	46.00	-21.80	AV	L	Pass
4	5.956	37.26	10.29	60.00	-22.74	Peak	L	Pass
4*	5.956	29.72	10.29	60.00	-30.28	QP	L	Pass
4**	5.956	23.26	10.29	50.00	-26.74	AV	L	Pass
5	20.810	43.49	10.97	60.00	-16.51	Peak	L	Pass
5*	20.810	32.94	10.97	60.00	-27.06	QP	L	Pass
5**	20.810	28.93	10.97	50.00	-21.07	AV	L	Pass
6	23.890	43.62	11.01	60.00	-16.38	Peak	L	Pass
6*	23.890	26.08	11.01	60.00	-33.92	QP	L	Pass
6**	23.890	25.77	11.01	50.00	-24.23	AV	L	Pass


TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 29 of 32

Figure 14: Conducted Emission on AC Mains, N Phase

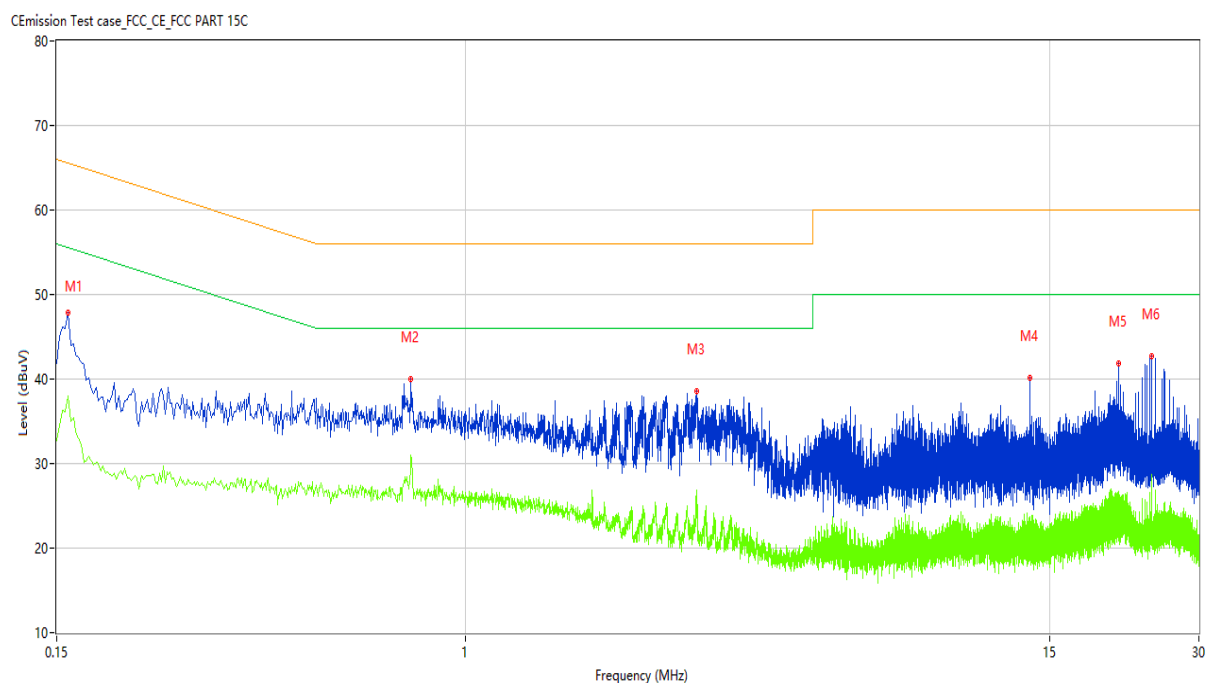

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	46.11	10.26	66.00	-19.89	Peak	N	Pass
1*	0.150	39.99	10.26	66.00	-26.01	QP	N	Pass
1**	0.150	32.75	10.26	56.00	-23.25	AV	N	Pass
2	0.776	41.22	10.31	56.00	-14.78	Peak	N	Pass
2*	0.776	28.23	10.31	56.00	-27.77	QP	N	Pass
2**	0.776	30.96	10.31	46.00	-15.04	AV	N	Pass
3	2.926	38.28	10.16	56.00	-17.72	Peak	N	Pass
3*	2.926	34.77	10.16	56.00	-21.23	QP	N	Pass
3**	2.926	25.83	10.16	46.00	-20.17	AV	N	Pass
4	13.698	42.52	10.43	60.00	-17.48	Peak	N	Pass
4*	13.698	27.81	10.43	60.00	-32.19	QP	N	Pass
4**	13.698	23.29	10.43	50.00	-26.71	AV	N	Pass
5	20.680	43.05	10.97	60.00	-16.95	Peak	N	Pass
5*	20.680	30.76	10.97	60.00	-29.24	QP	N	Pass
5**	20.680	26.09	10.97	50.00	-23.91	AV	N	Pass
6	24.072	46.84	11.01	60.00	-13.16	Peak	N	Pass
6*	24.072	28.92	11.01	60.00	-31.08	QP	N	Pass
6**	24.072	28.66	11.01	50.00	-21.34	AV	N	Pass

TEST REPORT


Report No.: SHH22020028-01AE

Date: 2022-06-13


Page 30 of 32

5 Appendixes

5.1 Photographs of the Sample

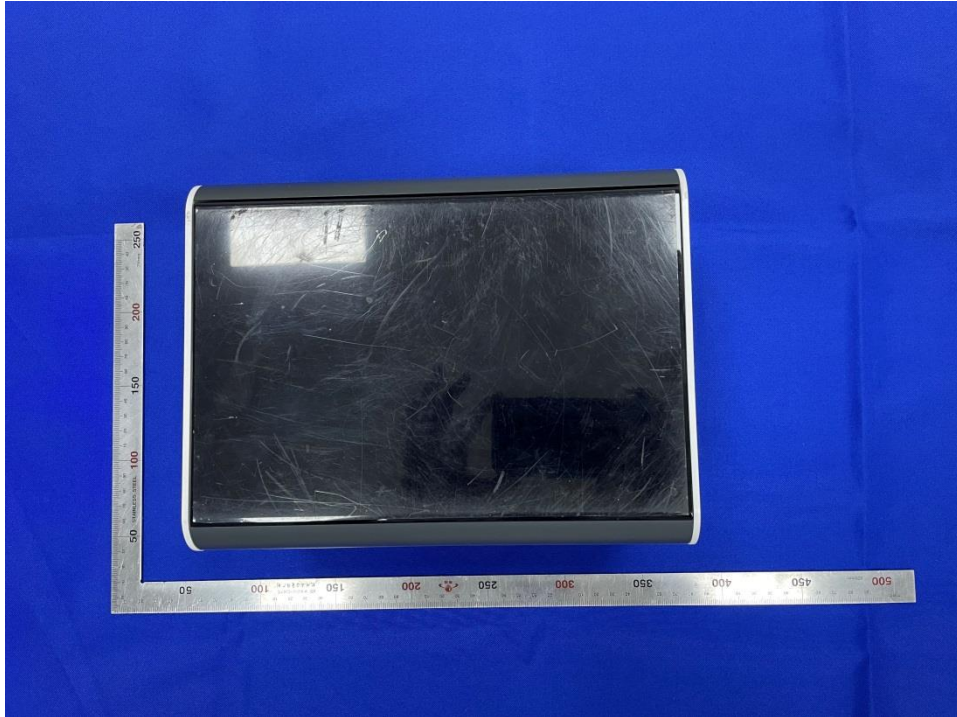

Front of the sample

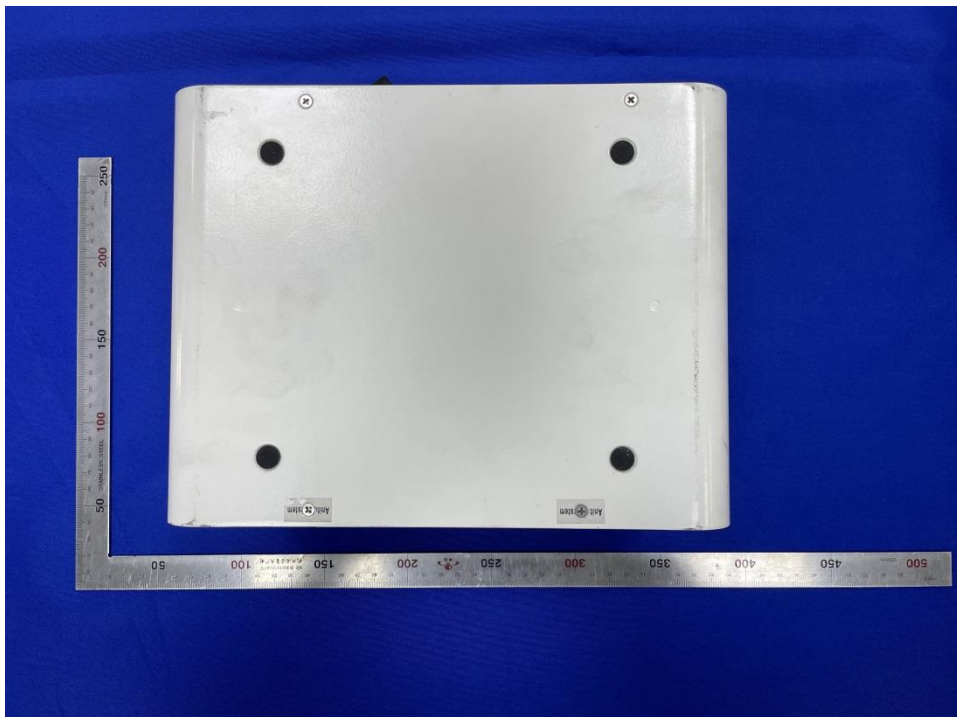

Back of the sample

TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 31 of 32

5.2 Set-up for Conducted Emission



5.3 Set-up for Conducted RF test at Antenna Port




TEST REPORT

Report No.: SHH22020028-01AE

Date: 2022-06-13

Page 32 of 32

5.4 Set-up for Spurious Emission below 1GHz

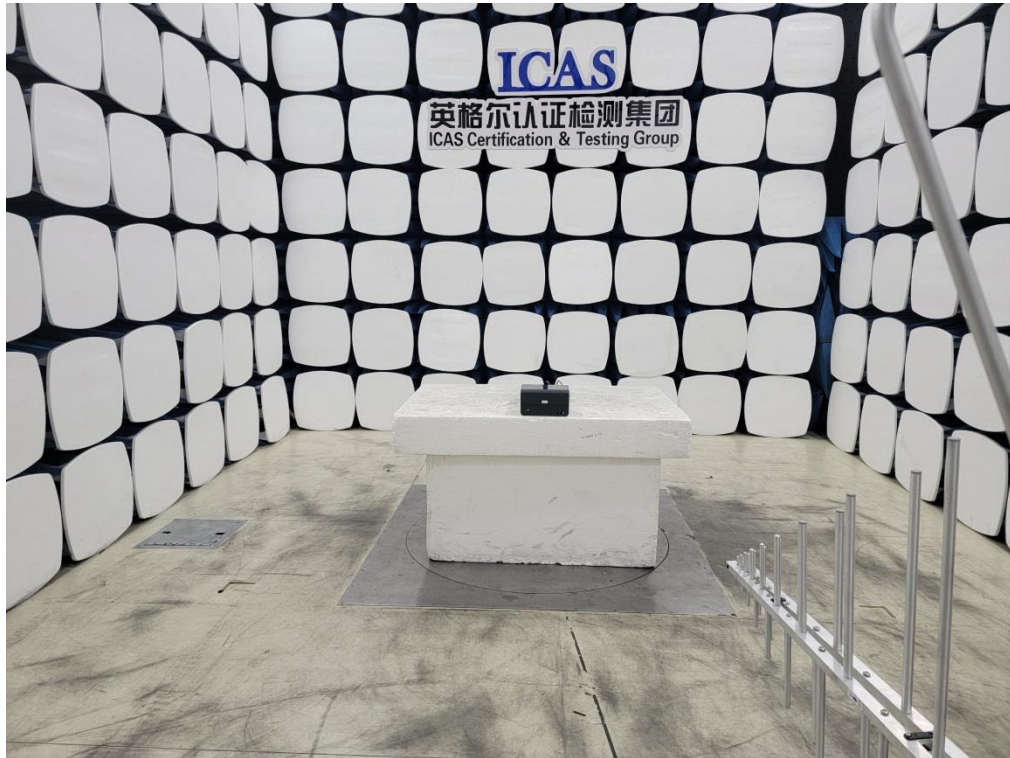

5.5 Set-up for Spurious Emission above 1GHz



End of the report