




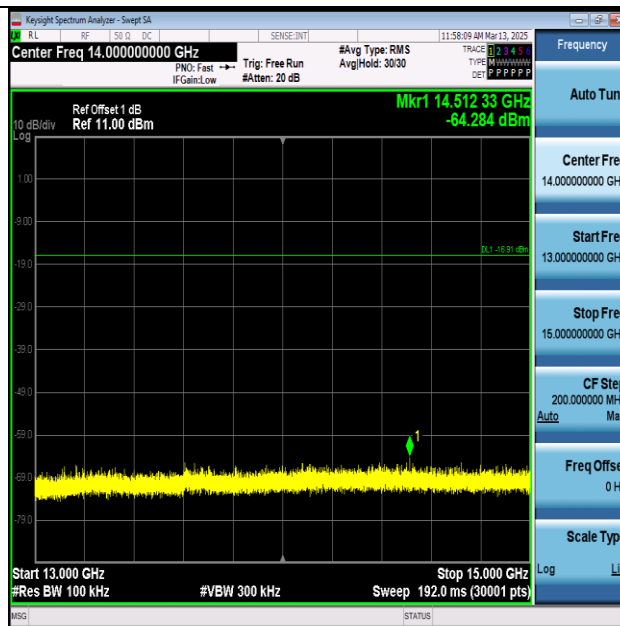


BLE_500K-Ant1-2402-13000~15000-PASS

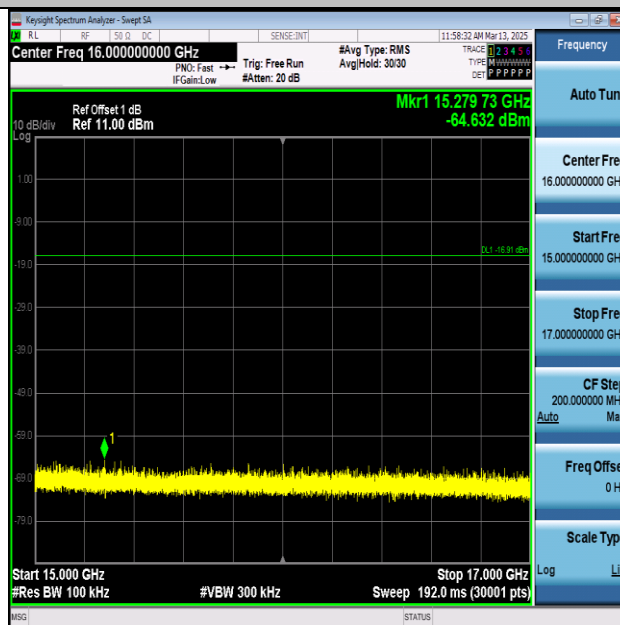


BLE_500K-Ant1-2402-15000~17000-PASS

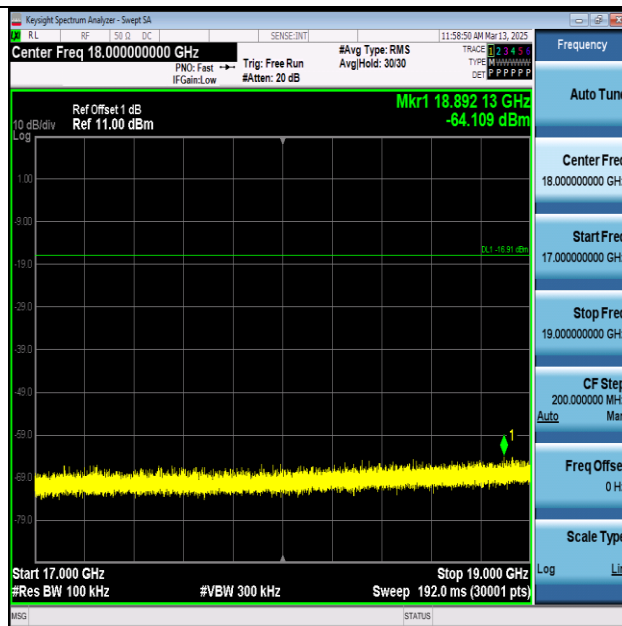


BLE_500K-Ant1-2402-17000~19000-PASS

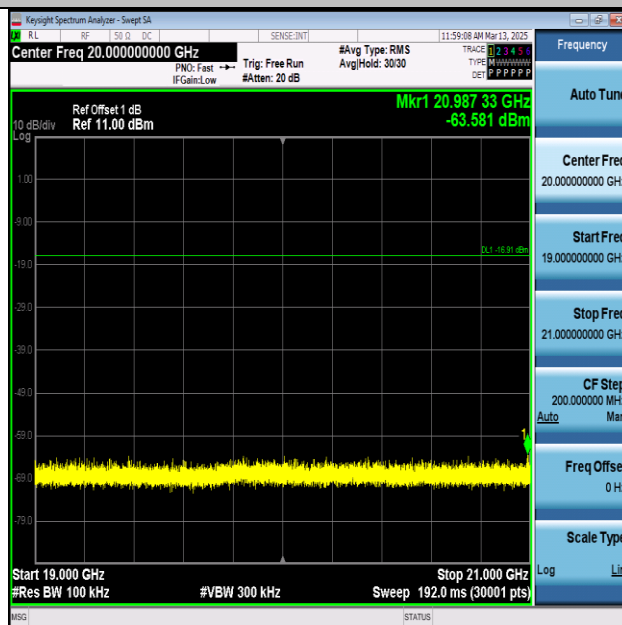


BLE_500K-Ant1-2402-19000~21000-PASS

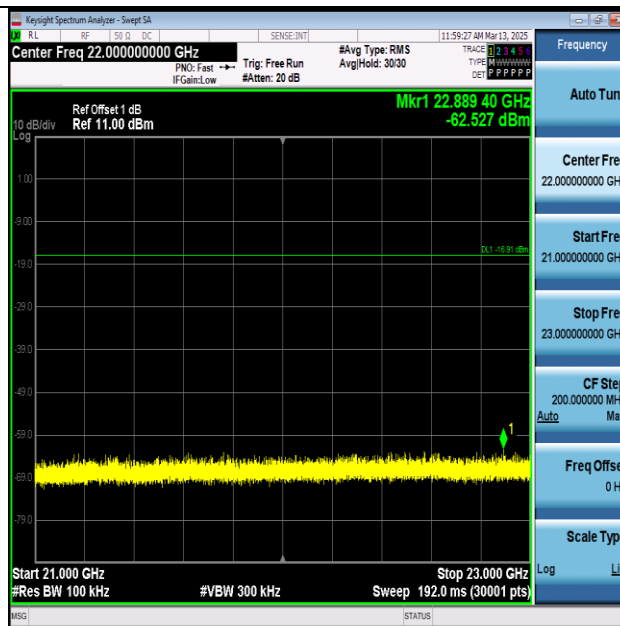


BLE_500K-Ant1-2402-21000~23000-PASS

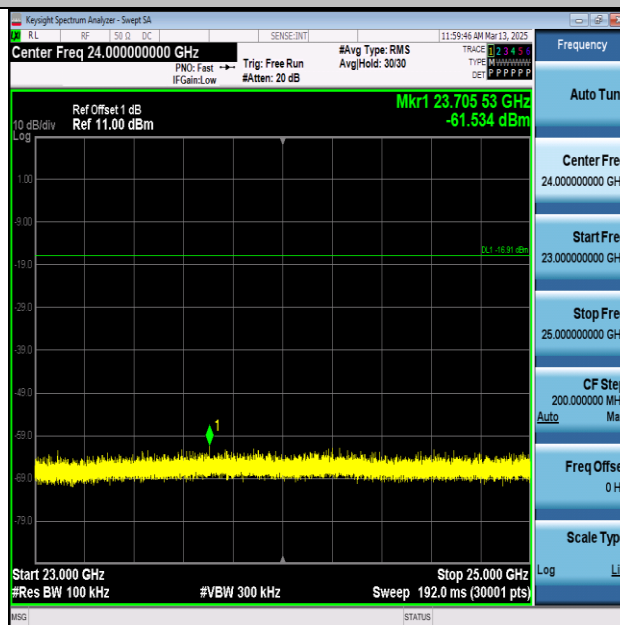


BLE_500K-Ant1-2402-23000~25000-PASS

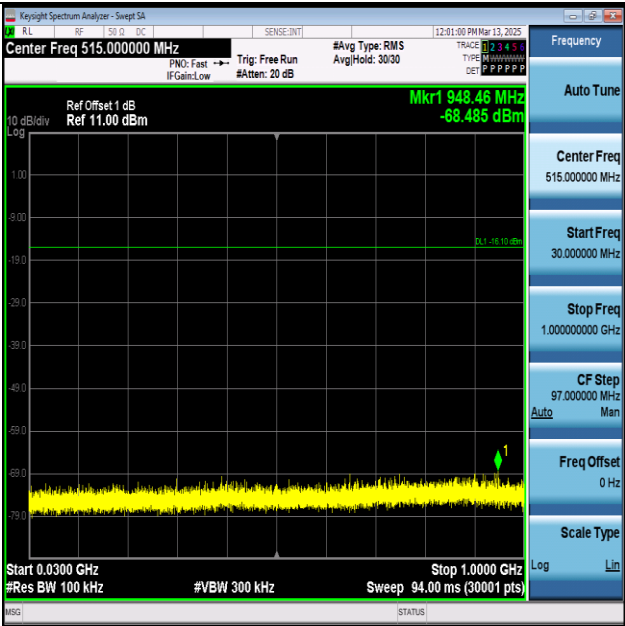


BLE_500K-Ant1-2440-30~1000-PASS

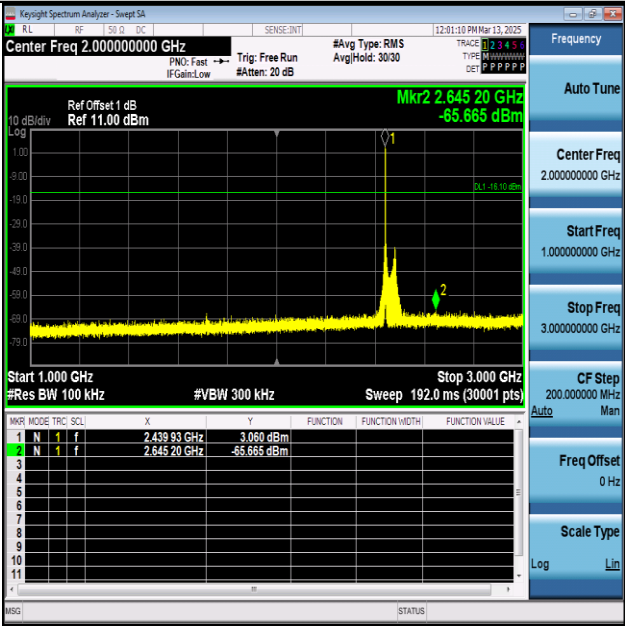


BLE_500K-Ant1-2440-1000~3000-PASS

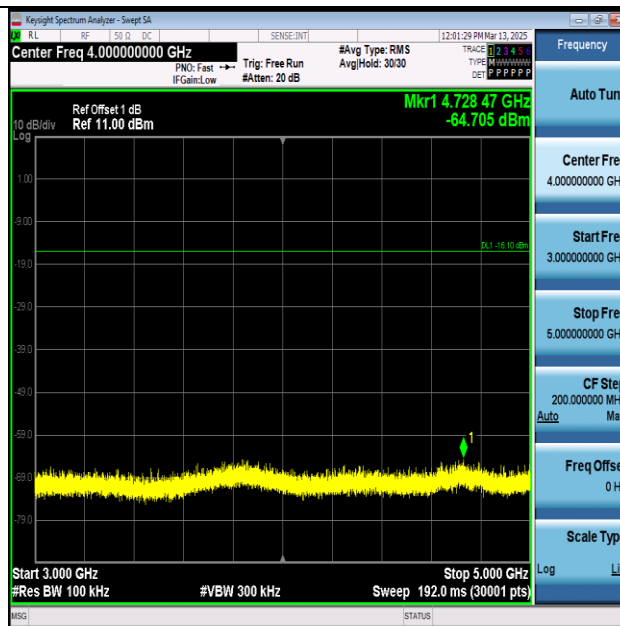


BLE_500K-Ant1-2440-3000~5000-PASS

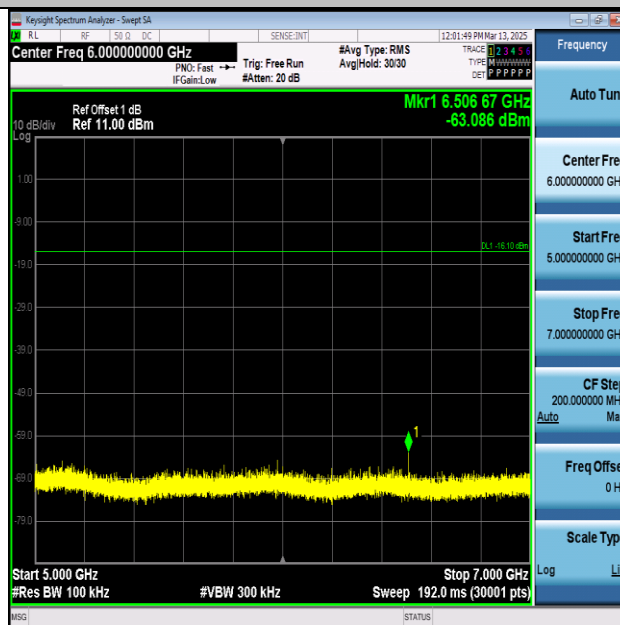


BLE_500K-Ant1-2440-5000~7000-PASS

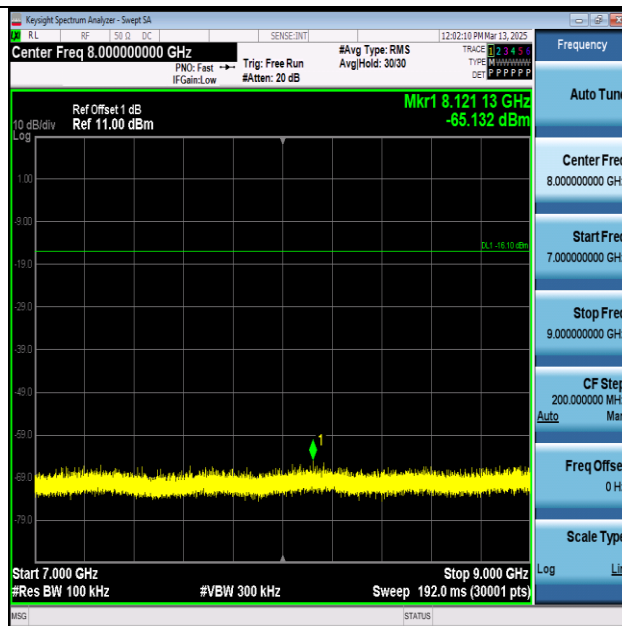


BLE_500K-Ant1-2440-7000~9000-PASS

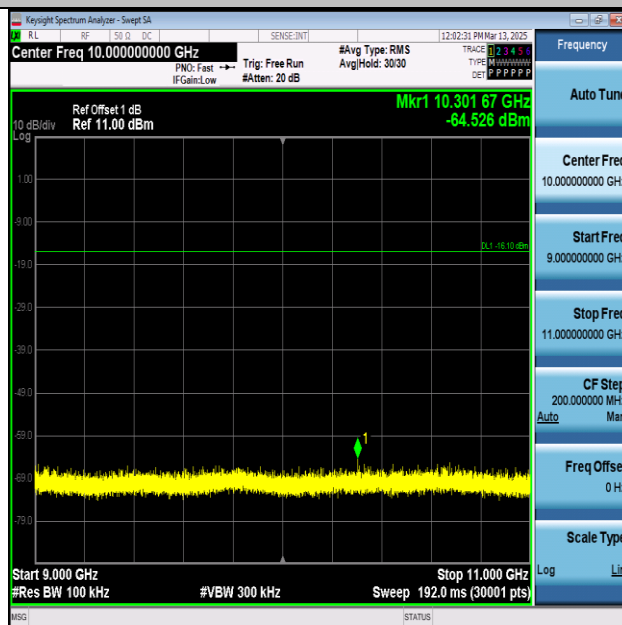


BLE_500K-Ant1-2440-9000~11000-PASS

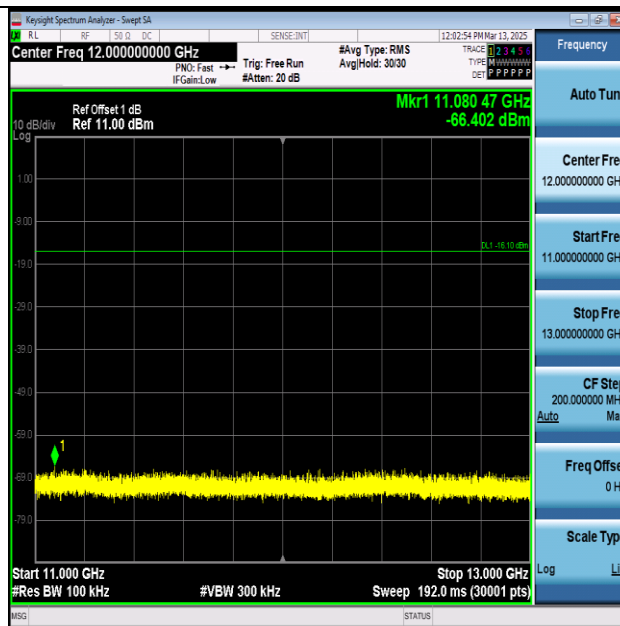


BLE_500K-Ant1-2440-11000~13000-PASS

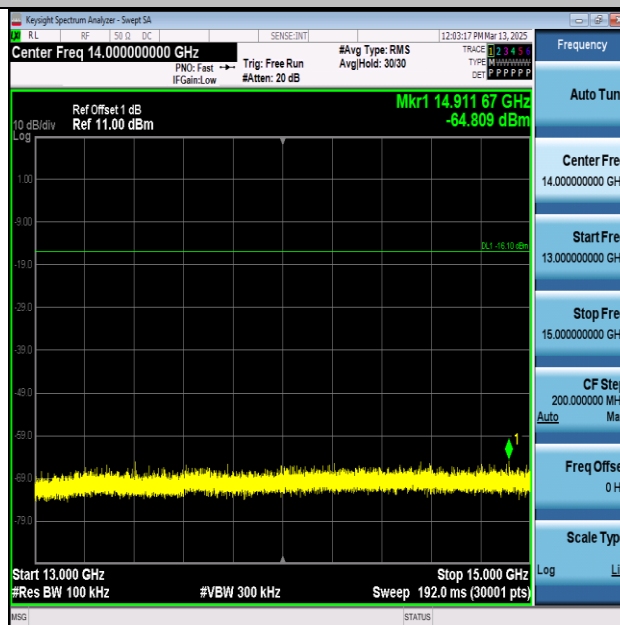


BLE_500K-Ant1-2440-13000~15000-PASS

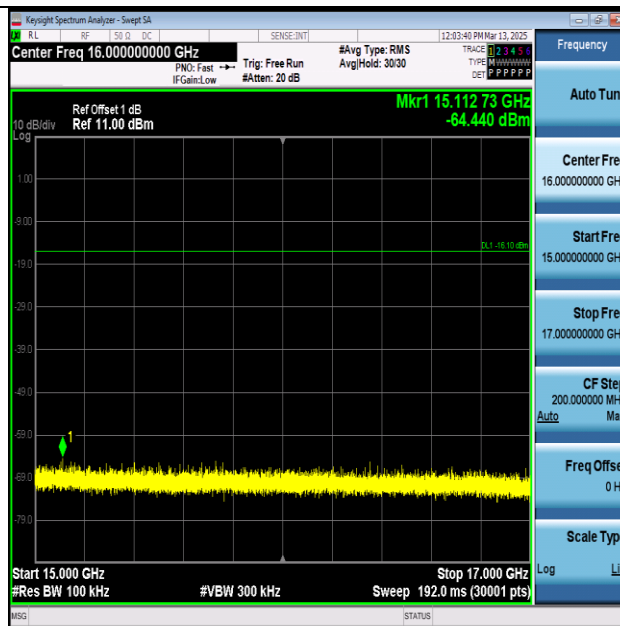


BLE_500K-Ant1-2440-15000~17000-PASS

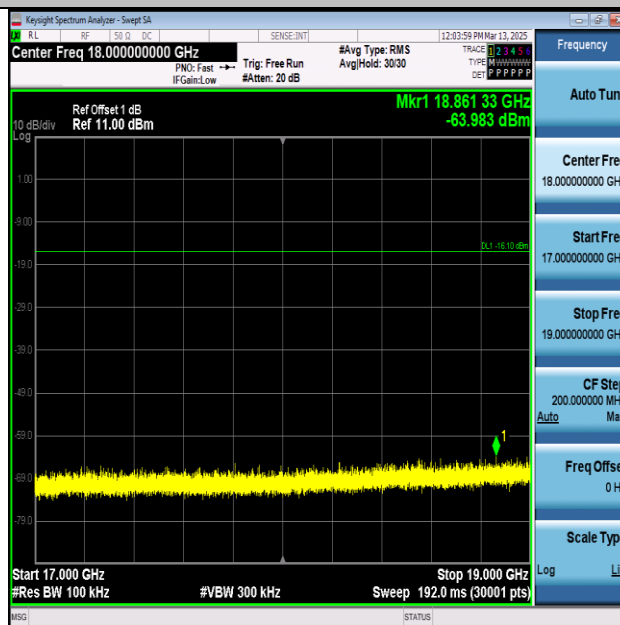


BLE_500K-Ant1-2440-17000~19000-PASS

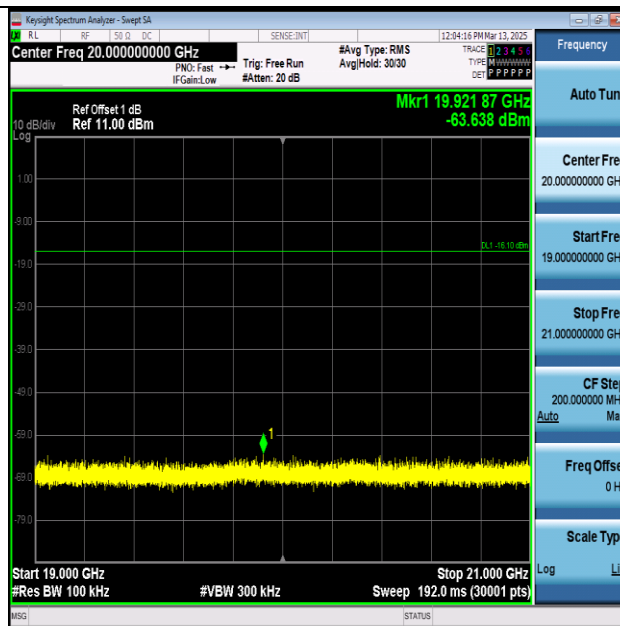


BLE_500K-Ant1-2440-19000~21000-PASS

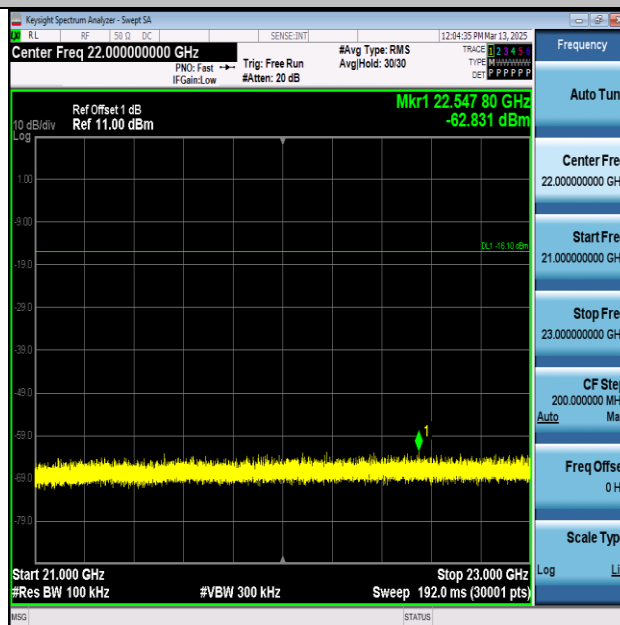


BLE_500K-Ant1-2440-21000~23000-PASS

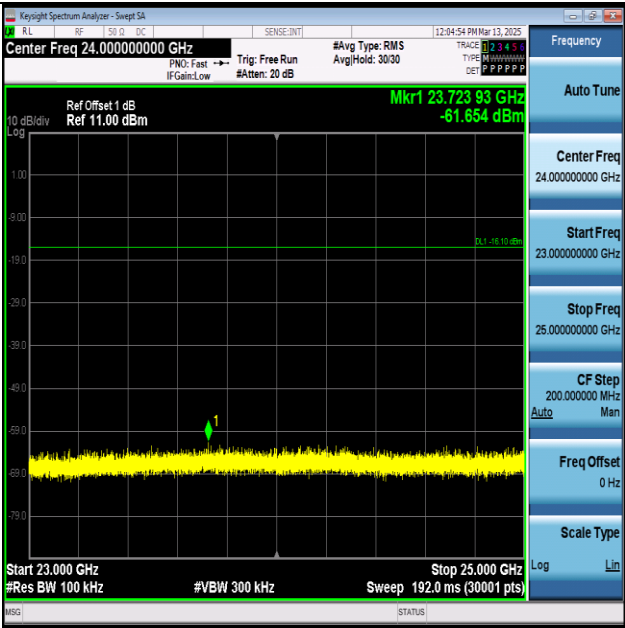


BLE_500K-Ant1-2440-23000~25000-PASS

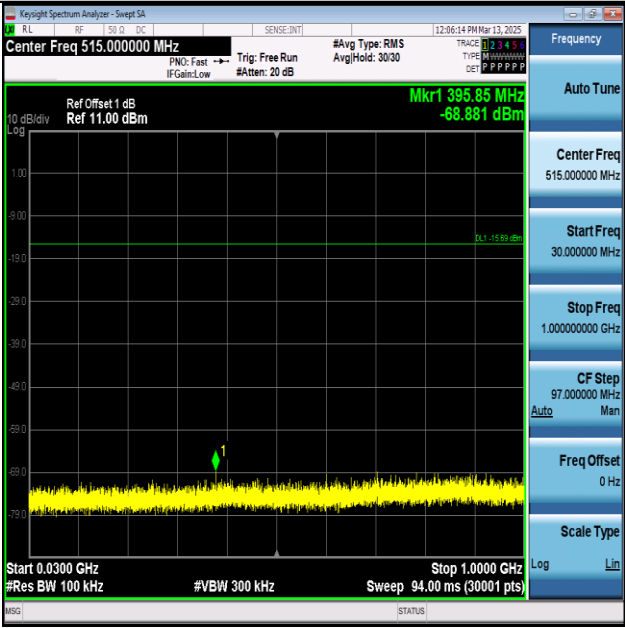


BLE_500K-Ant1-2480-30~1000-PASS

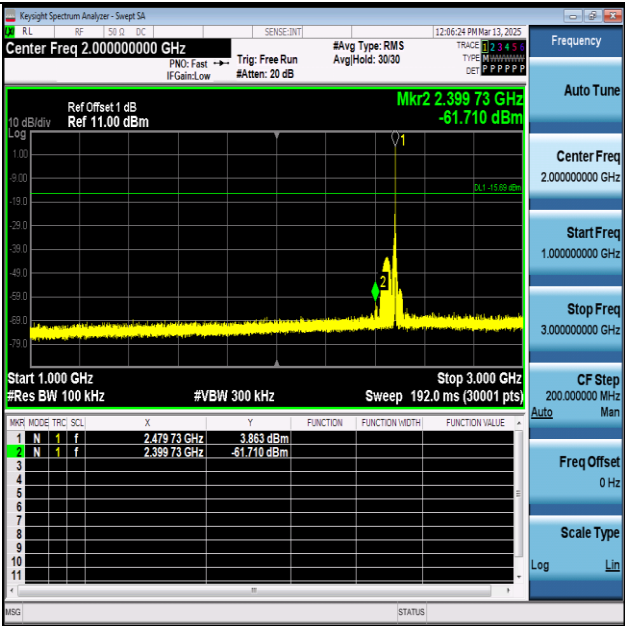


BLE_500K-Ant1-2480-1000~3000-PASS

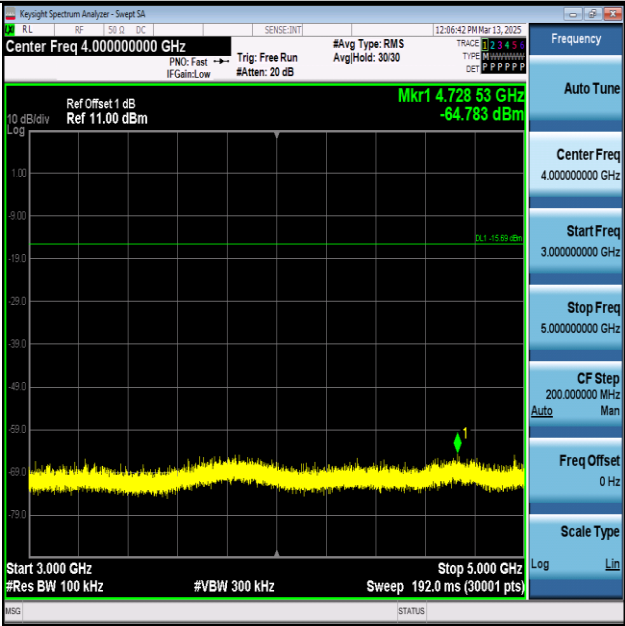


BLE_500K-Ant1-2480-3000~5000-PASS

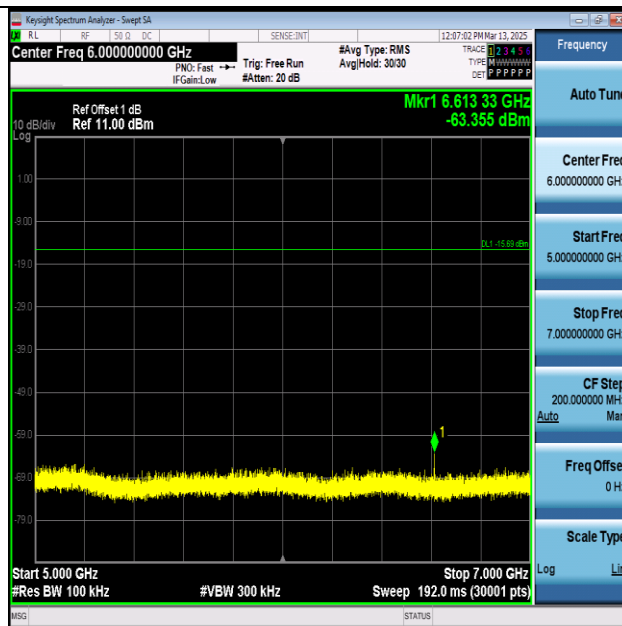


BLE_500K-Ant1-2480-5000~7000-PASS

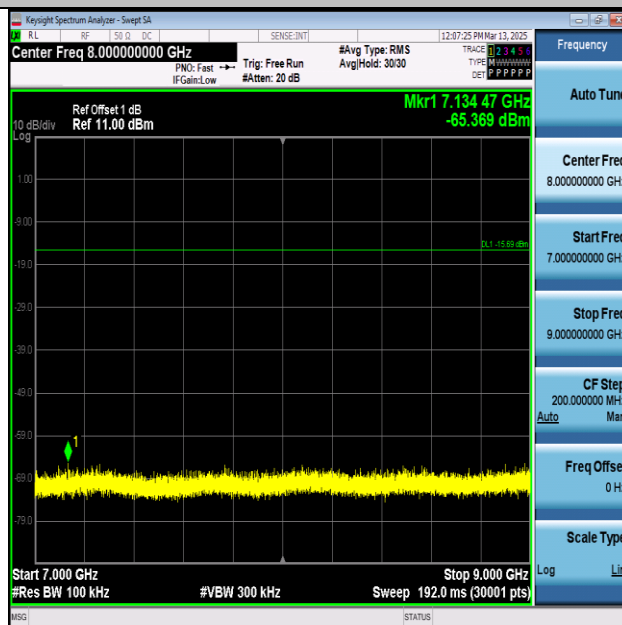


BLE_500K-Ant1-2480-7000~9000-PASS

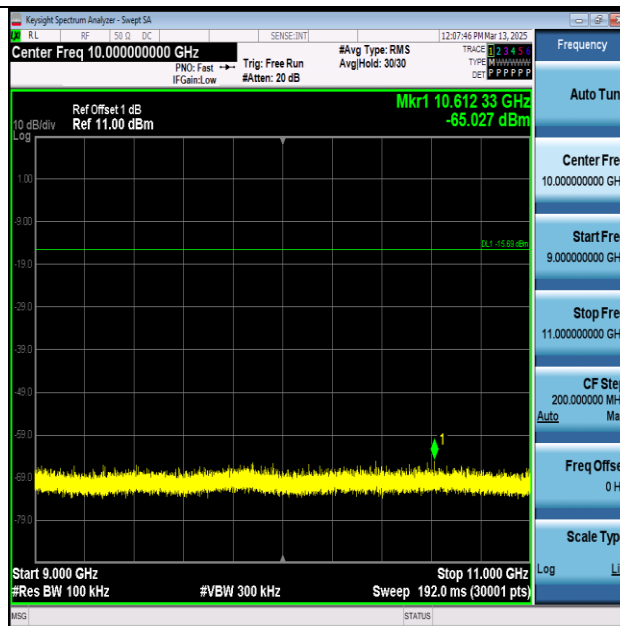


BLE_500K-Ant1-2480-9000~11000-PASS

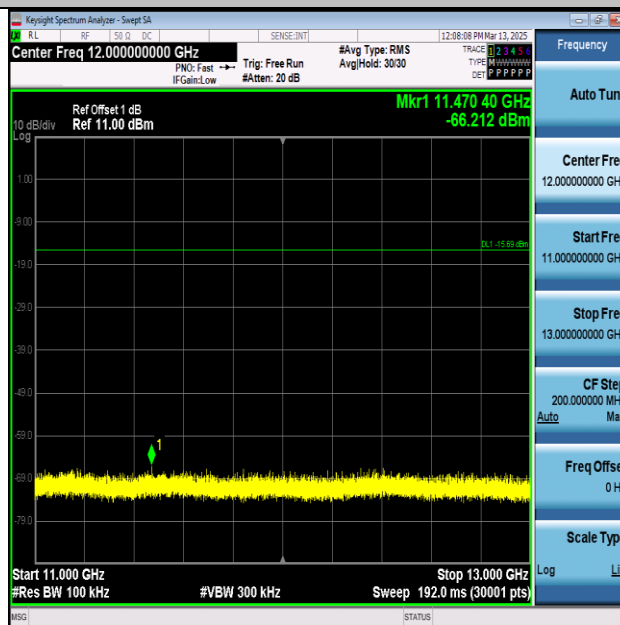


BLE_500K-Ant1-2480-11000~13000-PASS

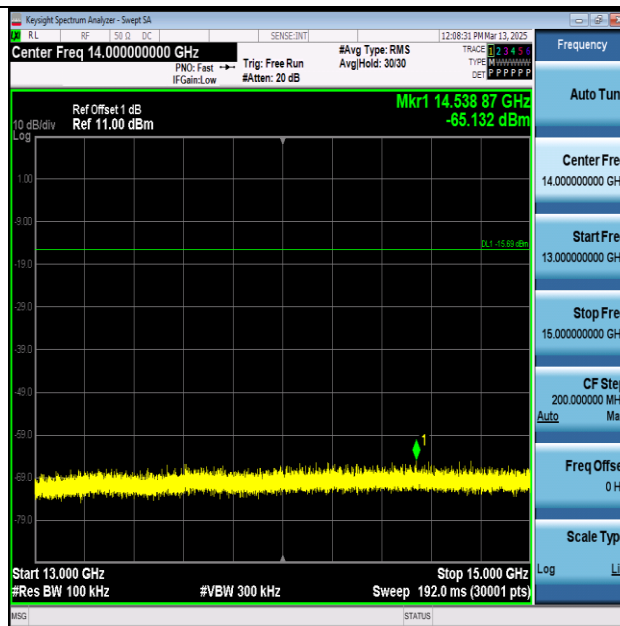


BLE_500K-Ant1-2480-13000~15000-PASS

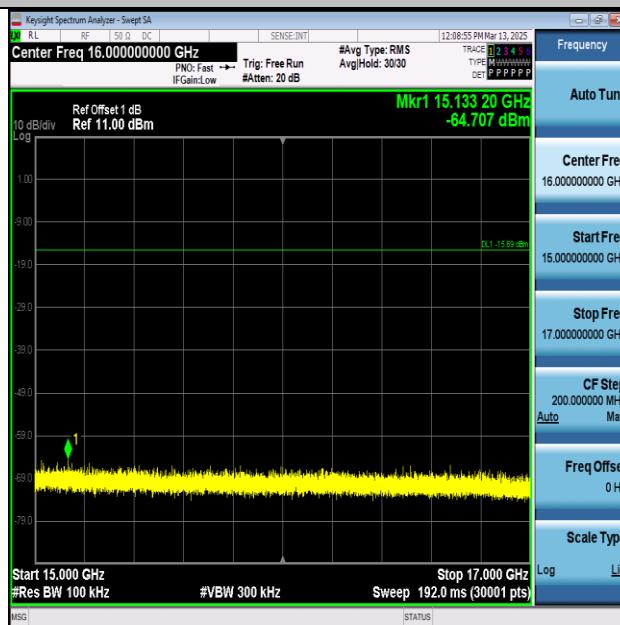


BLE_500K-Ant1-2480-15000~17000-PASS

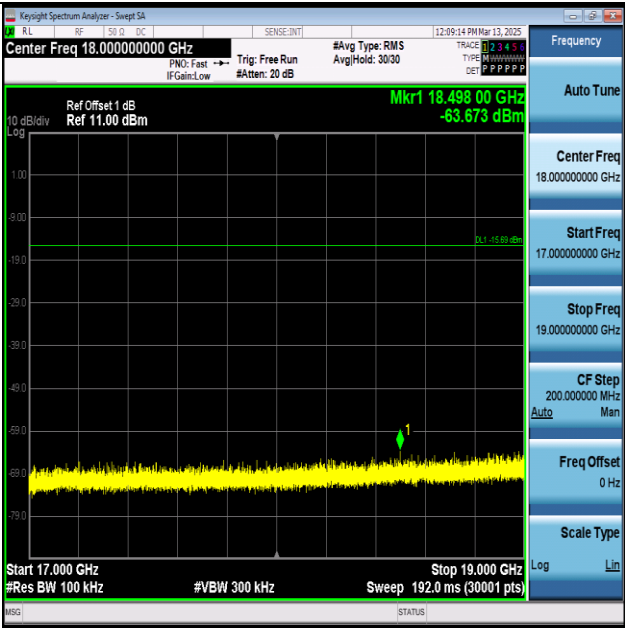


BLE_500K-Ant1-2480-17000~19000-PASS

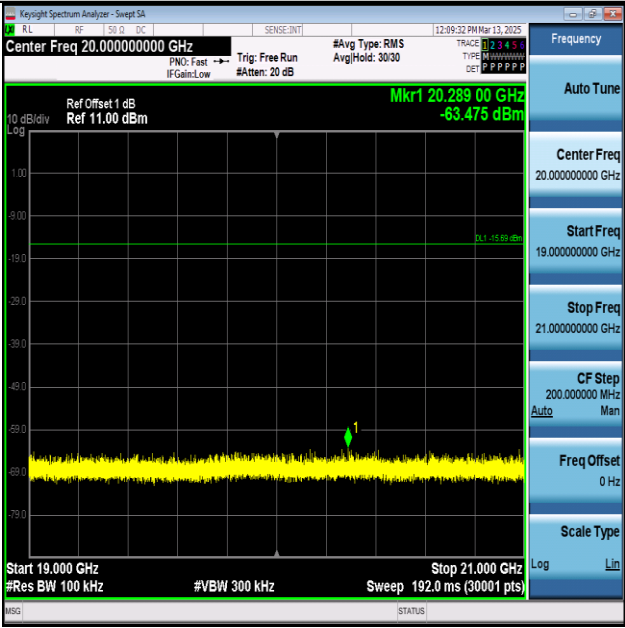

BLE_500K-Ant1-2480-19000~21000-PASS

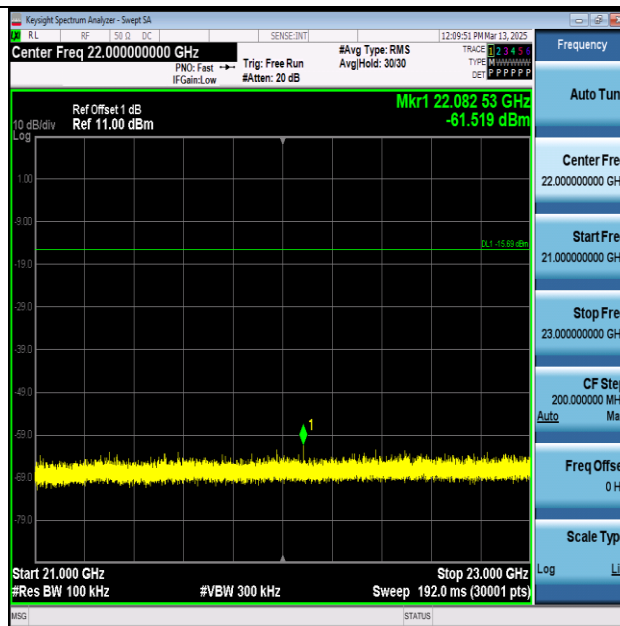

BLE_500K-Ant1-2480-21000~23000-PASS

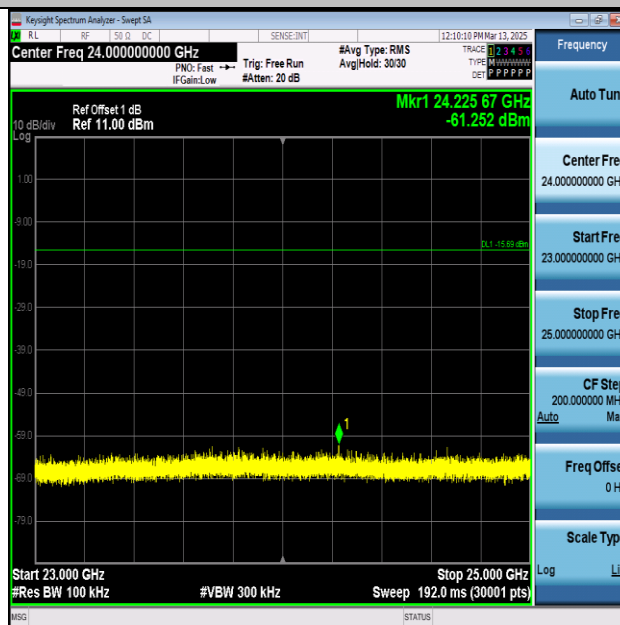

BLE_500K-Ant1-2480-23000~25000-PASS

Duty Cycle

Left Ear


TestMode	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	2402	0.44	0.62	70.97	1.49
	2440	0.44	0.63	69.84	1.56
	2480	0.44	0.63	69.84	1.56
BLE_2M	2402	0.25	0.62	40.32	3.94
	2440	0.26	0.63	41.27	3.84
	2480	0.26	0.63	41.27	3.84
BLE_125K	2402	3.11	3.75	82.93	0.81
	2440	3.11	3.75	82.93	0.81
	2480	3.11	3.75	82.93	0.81
BLE_500K	2402	1.07	1.88	56.91	2.45
	2440	1.07	1.88	56.91	2.45
	2480	1.07	1.87	57.22	2.42


Right Ear

TestMode	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	2402	0.44	0.63	69.84	1.56
	2440	0.44	0.63	69.84	1.56
	2480	0.44	0.62	70.97	1.49
BLE_2M	2402	0.25	0.62	40.32	3.94
	2440	0.26	0.63	41.27	3.84
	2480	0.26	0.63	41.27	3.84
BLE_125K	2402	3.11	3.75	82.93	0.81
	2440	3.11	3.75	82.93	0.81
	2480	3.10	3.75	82.67	0.83
BLE_500K	2402	1.07	1.87	57.22	2.42
	2440	1.07	1.87	57.22	2.42
	2480	1.07	1.88	56.91	2.45


Test Graphs

Left Ear

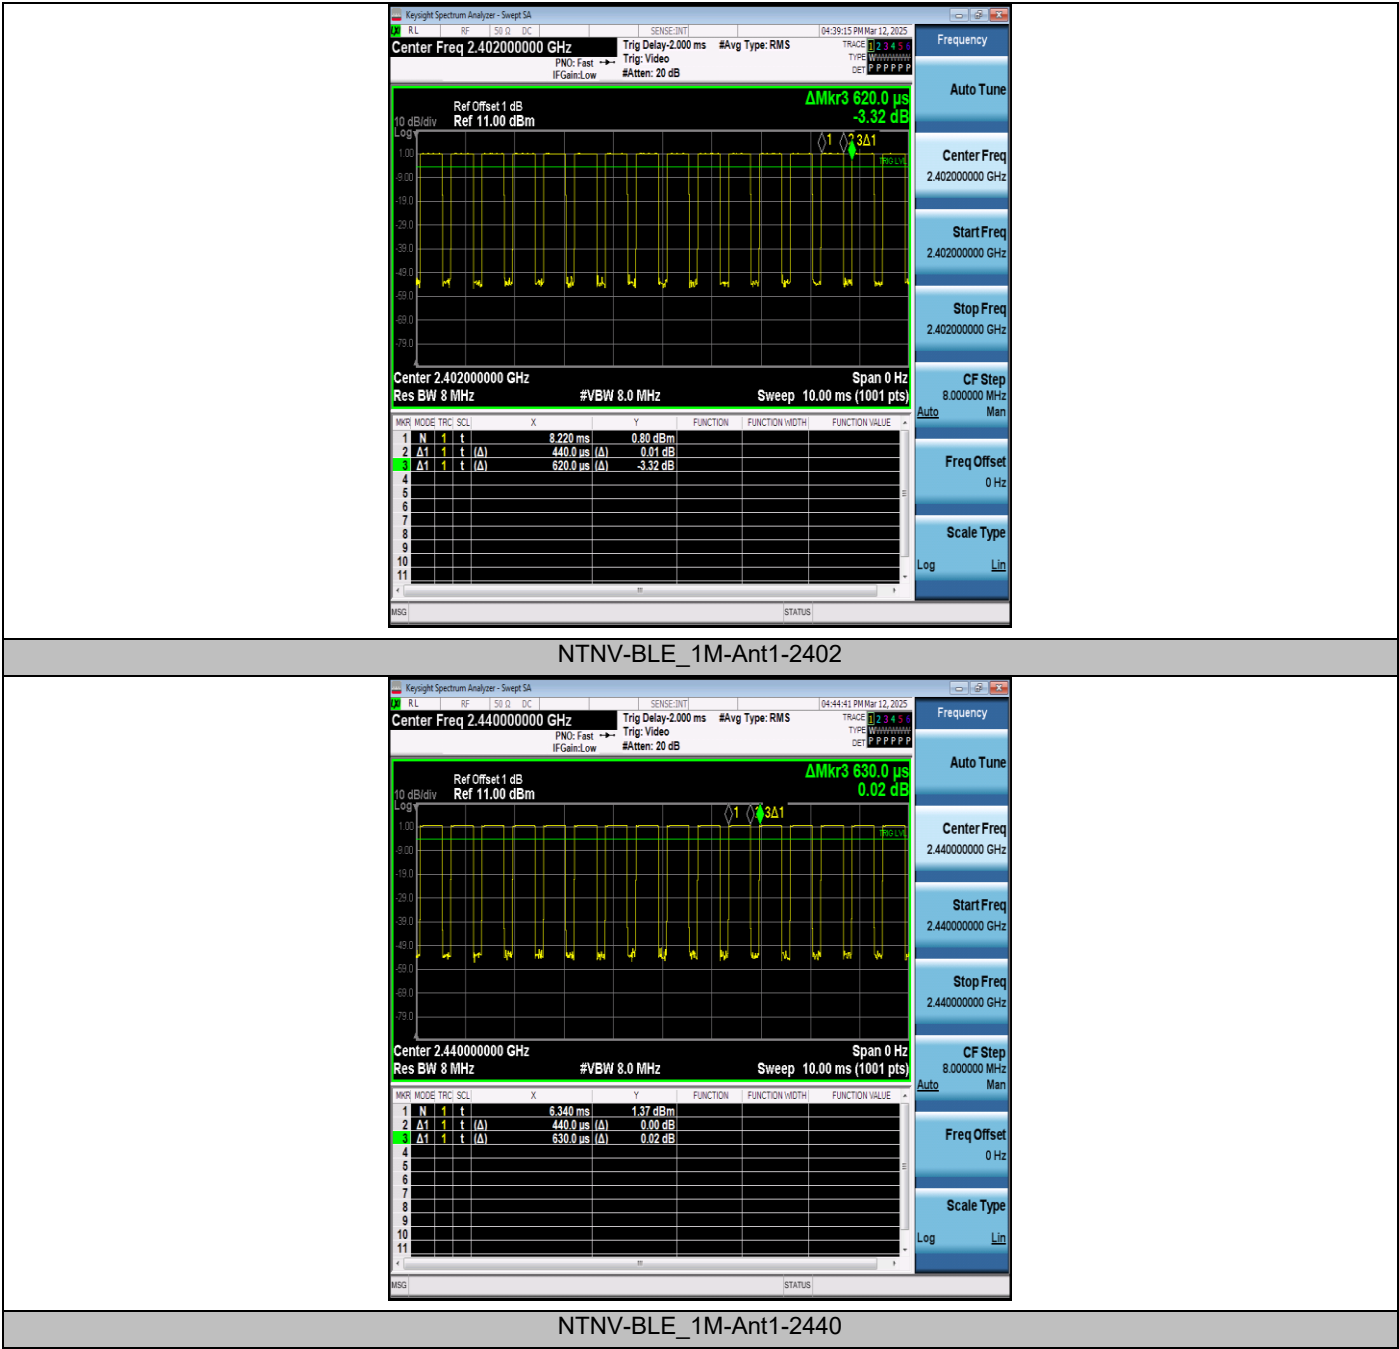


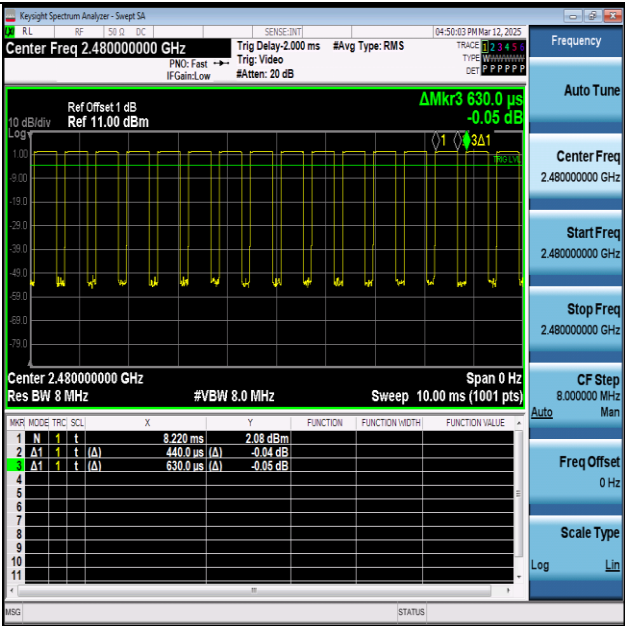


NTNV-BLE_1M-Ant1-2480

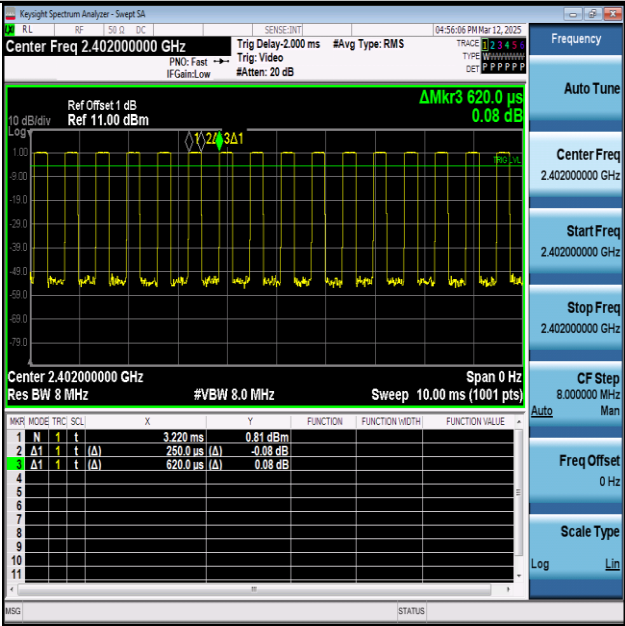


NTNV-BLE_2M-Ant1-2402

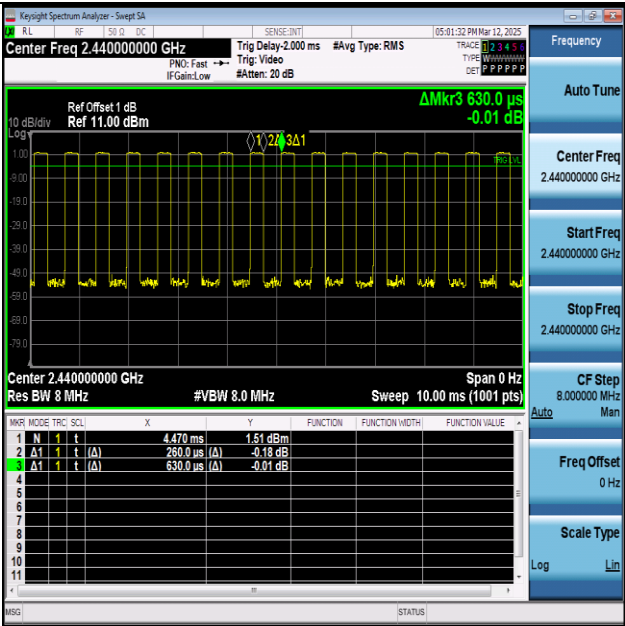


NTNV-BLE_2M-Ant1-2440

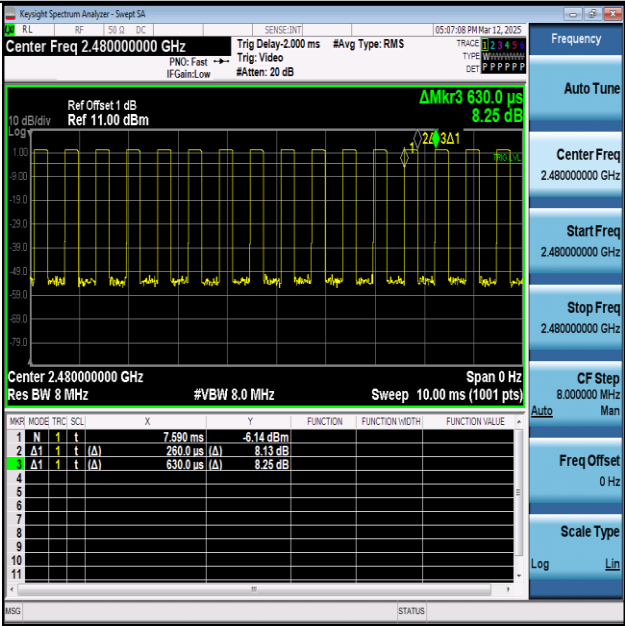


NTNV-BLE_2M-Ant1-2480

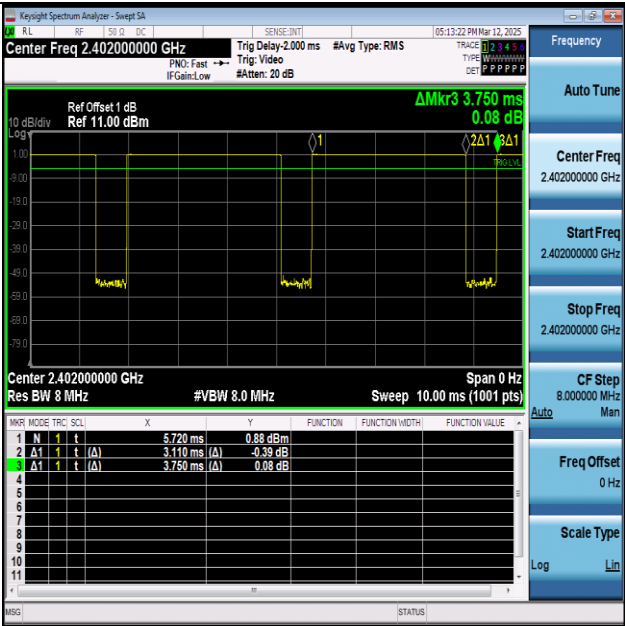


NTNV-BLE_125K-Ant1-2402

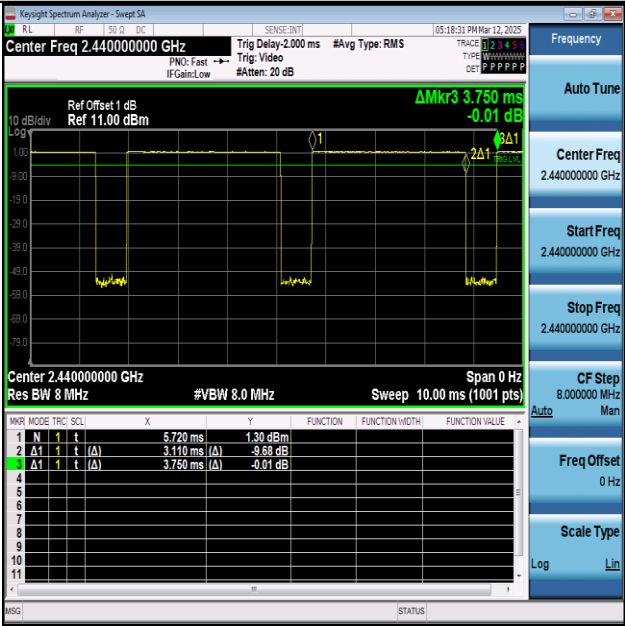


NTNV-BLE_125K-Ant1-2440

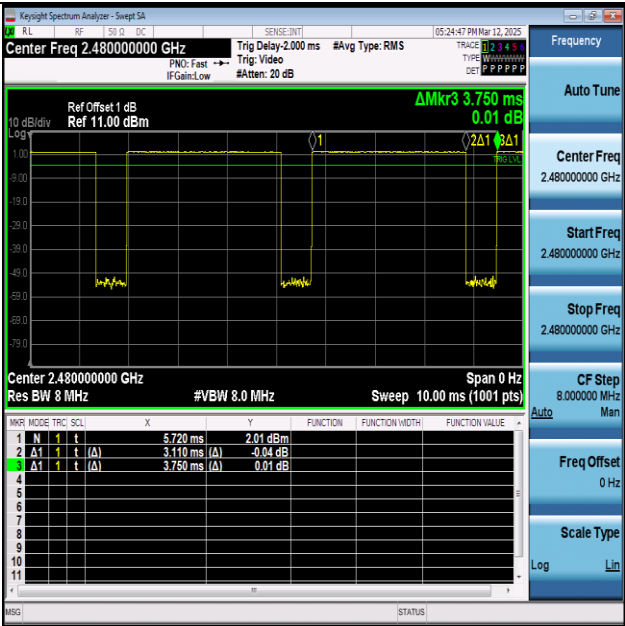


NTNV-BLE_125K-Ant1-2480

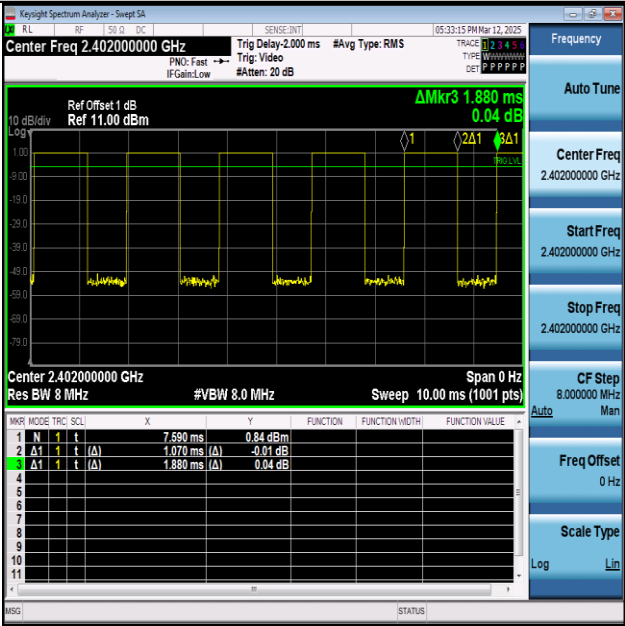

NTNV-BLE_500K-Ant1-2402

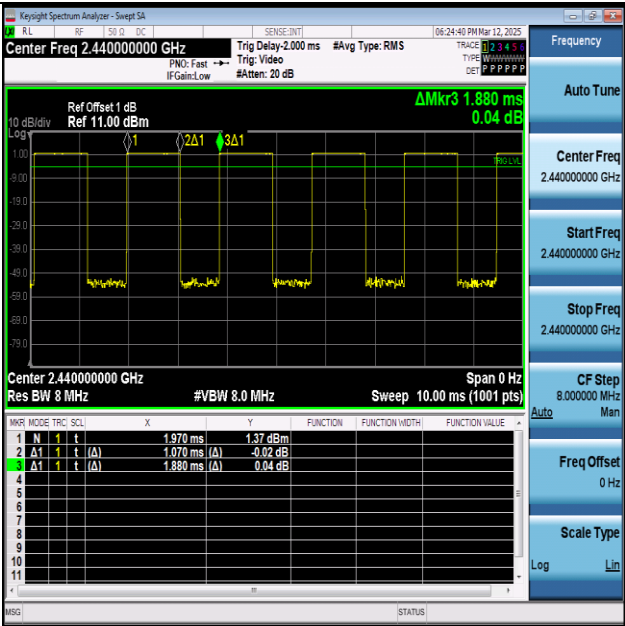


NTNV-BLE_500K-Ant1-2440

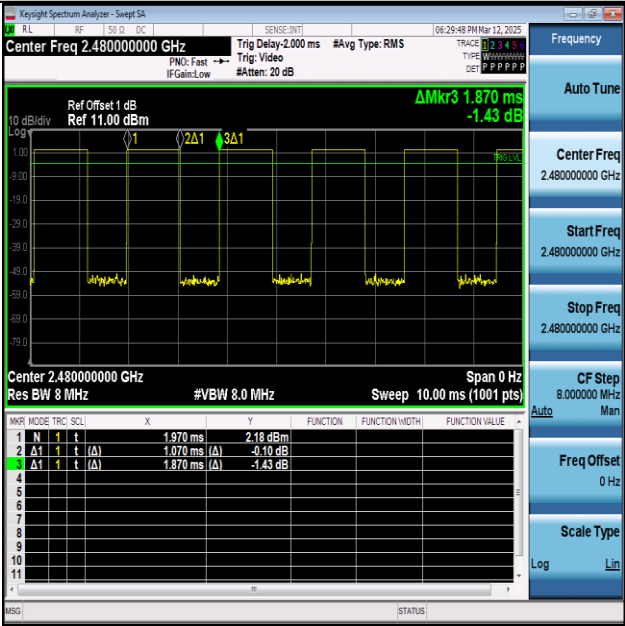


NTNV-BLE_500K-Ant1-2480


Right Ear

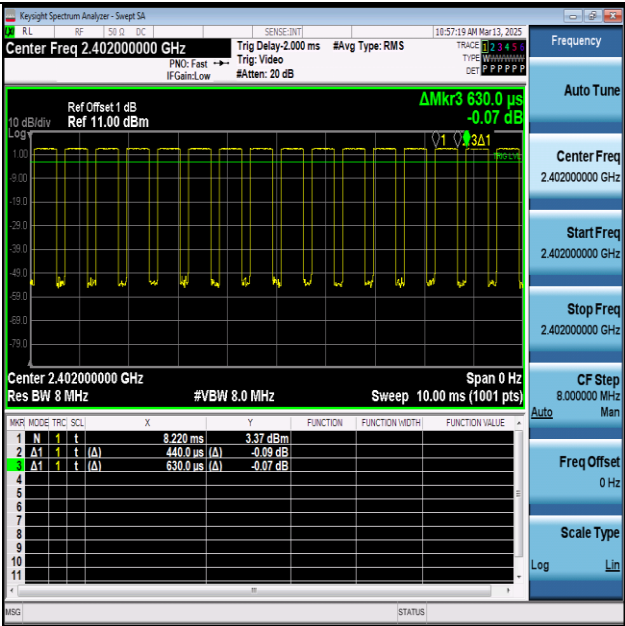


NTNV-BLE_1M-Ant1-2402

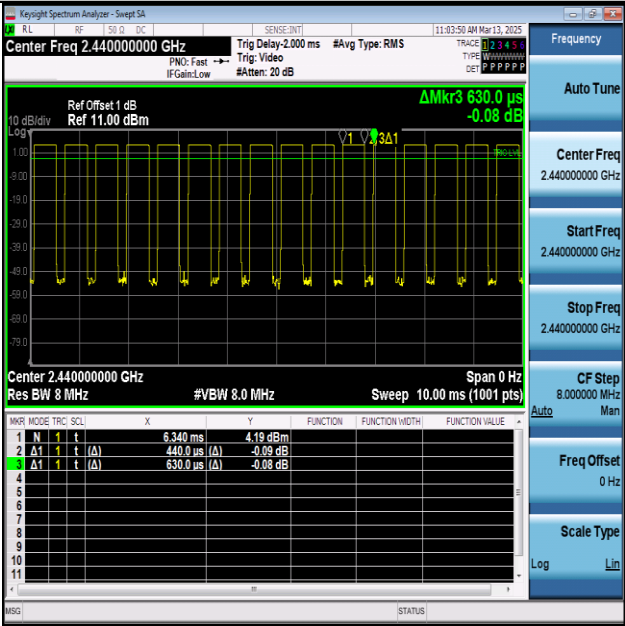


NTNV-BLE_1M-Ant1-2440

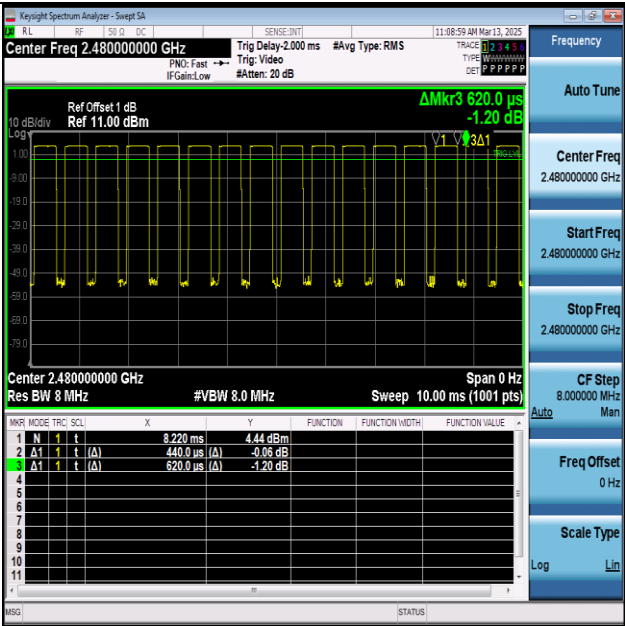


NTNV-BLE_1M-Ant1-2480

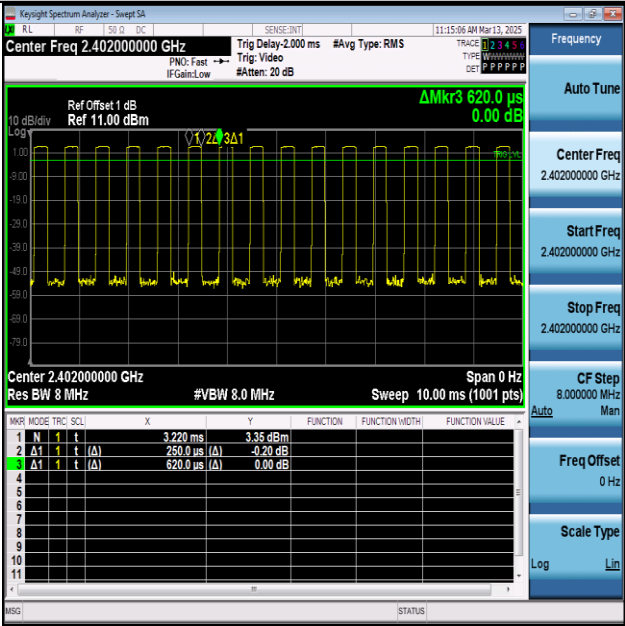


NTNV-BLE_2M-Ant1-2402

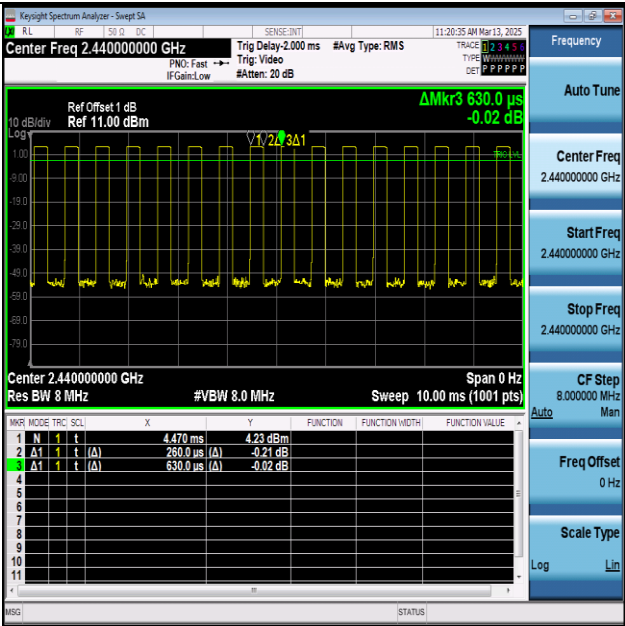


NTNV-BLE_2M-Ant1-2440

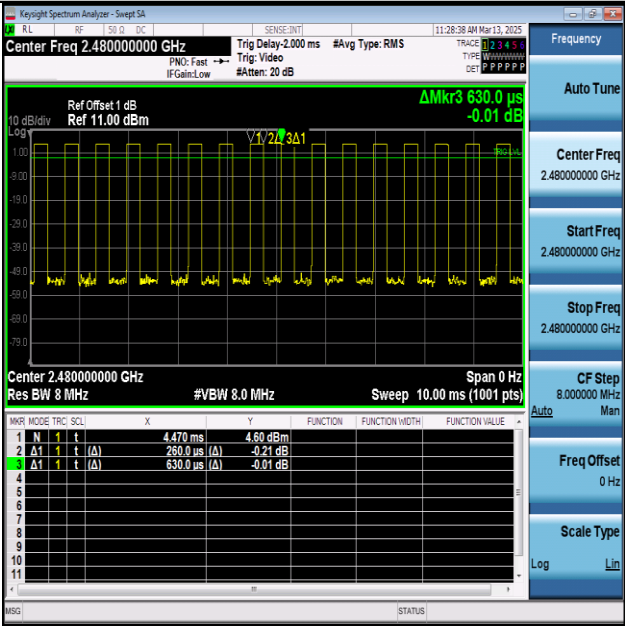


NTNV-BLE_2M-Ant1-2480

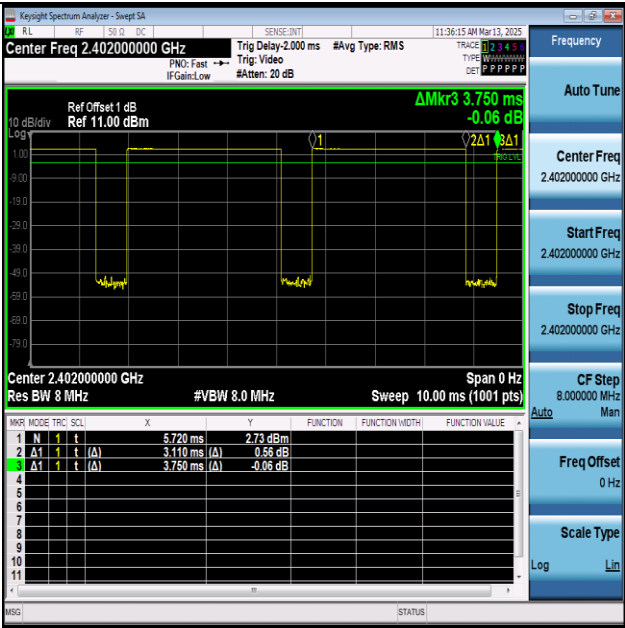


NTNV-BLE_125K-Ant1-2402

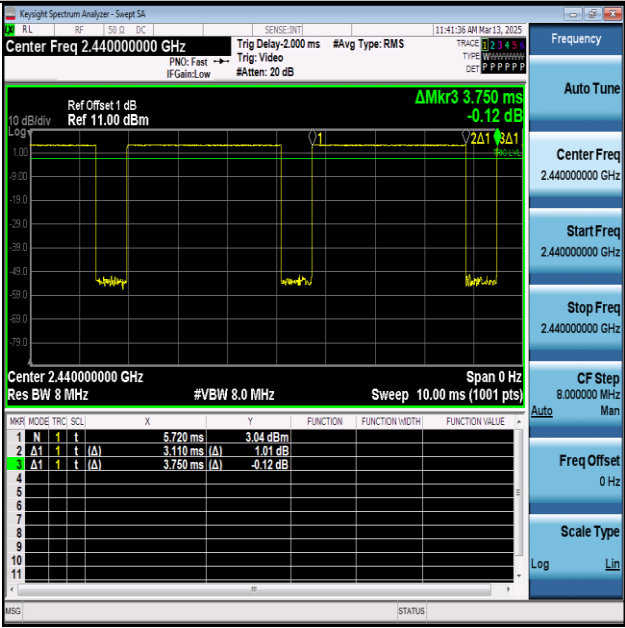


NTNV-BLE_125K-Ant1-2440

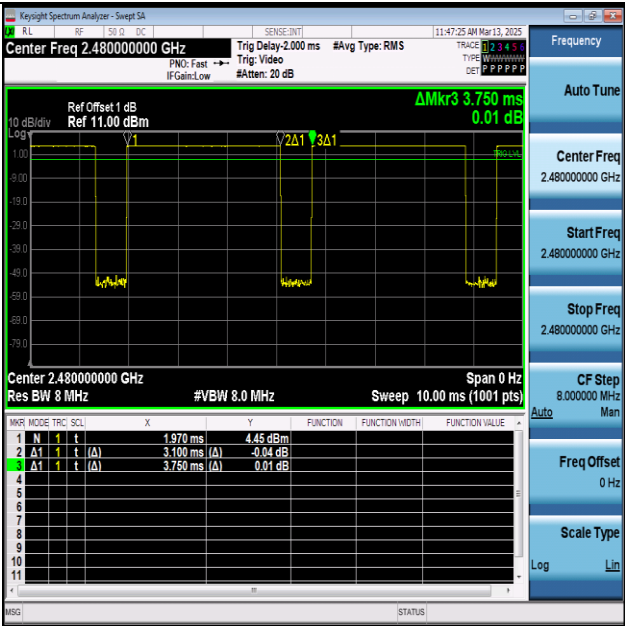


NTNV-BLE_125K-Ant1-2480

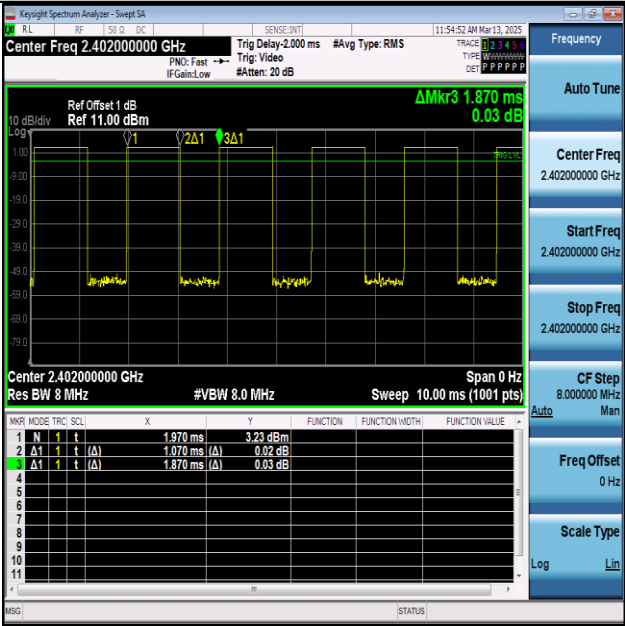

NTNV-BLE_500K-Ant1-2402

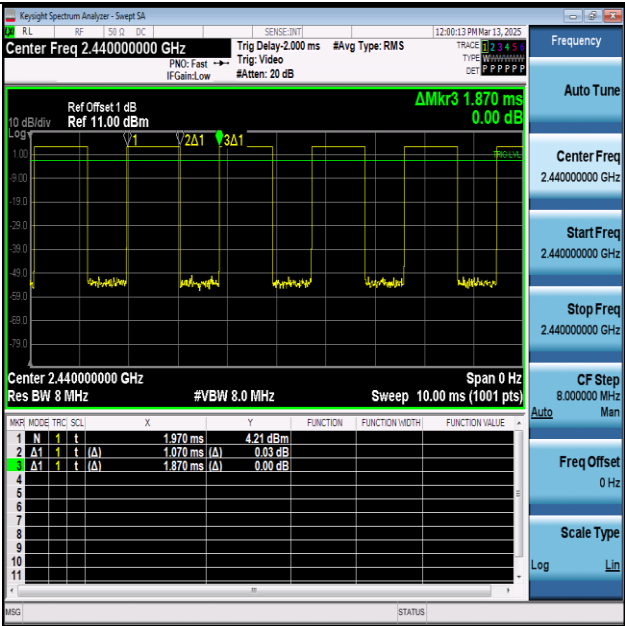

NTNV-BLE_500K-Ant1-2440

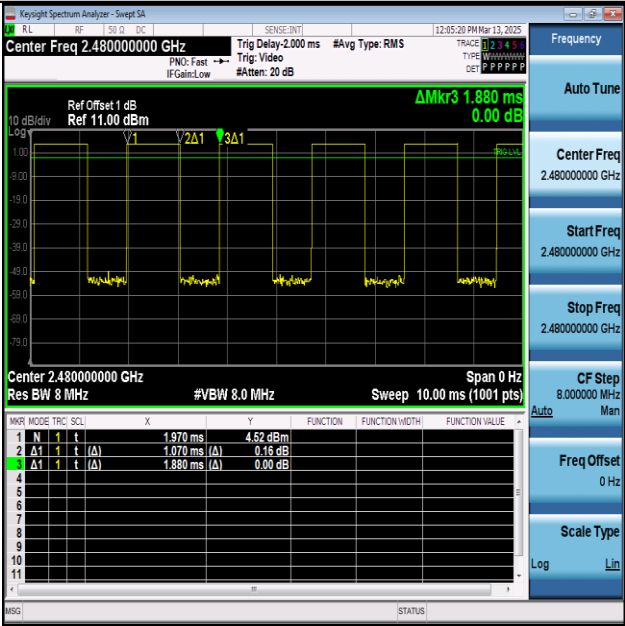

NTNV-BLE_500K-Ant1-2480

Emissions in Restricted Bands


Left Ear

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2402MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

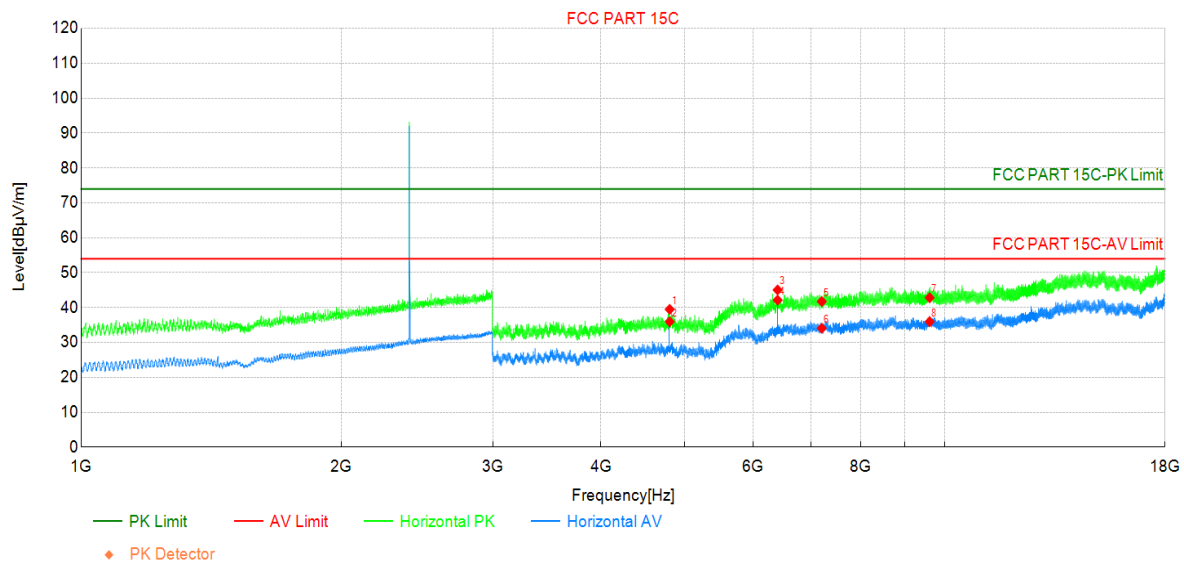

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	4804.00	45.51	39.48	-6.03	74.00	34.52	PK	Horizo	PASS
2	4804.00	41.97	35.94	-6.03	54.00	18.06	AV	Horizo	PASS
3	6405.38	43.62	45.05	1.43	74.00	28.95	PK	Horizo	PASS
4	6405.75	40.71	42.14	1.43	54.00	11.86	AV	Horizo	PASS
5	7206.00	38.77	41.74	2.97	74.00	32.26	PK	Horizo	PASS
6	7206.00	31.10	34.07	2.97	54.00	19.93	AV	Horizo	PASS
7	9608.00	36.88	42.82	5.94	74.00	31.18	PK	Horizo	PASS
8	9608.00	30.00	35.94	5.94	54.00	18.06	AV	Horizo	PASS

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2402MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

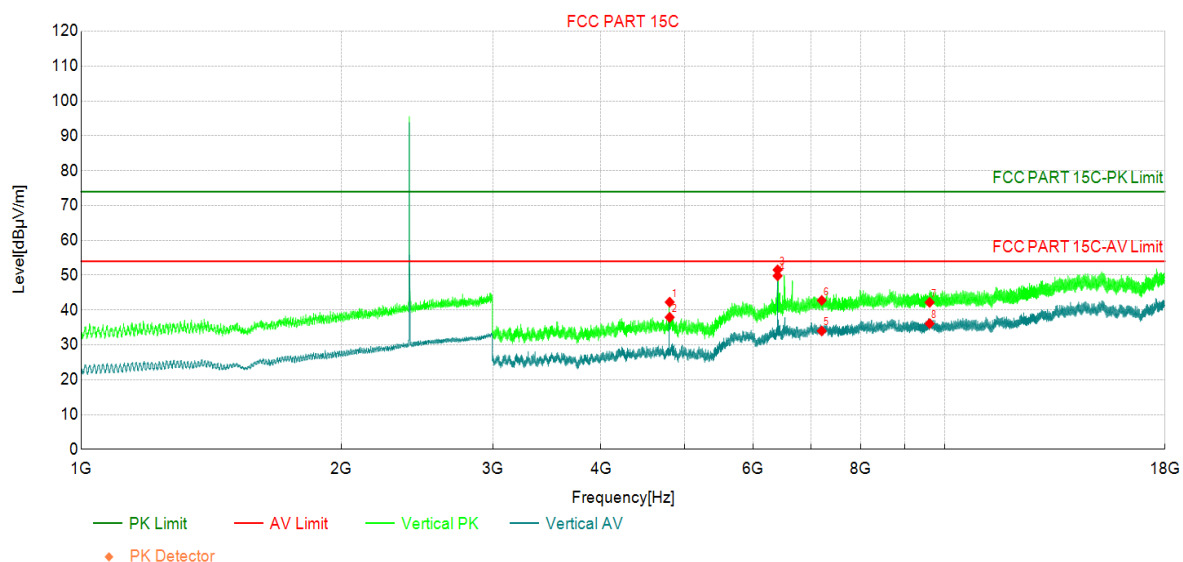

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804.00	48.29	42.26	-6.03	74.00	31.74	PK	Vertic	PASS
2	4804.00	43.93	37.90	-6.03	54.00	16.10	AV	Vertic	PASS
3	6405.38	50.09	51.52	1.43	74.00	22.48	PK	Vertic	PASS
4	6405.75	48.37	49.80	1.43	54.00	4.20	AV	Vertic	PASS
5	7206.00	31.02	33.99	2.97	54.00	20.01	AV	Vertic	PASS
6	7206.00	39.79	42.76	2.97	74.00	31.24	PK	Vertic	PASS
7	9608.00	36.26	42.20	5.94	74.00	31.80	PK	Vertic	PASS
8	9608.00	30.16	36.10	5.94	54.00	17.90	AV	Vertic	PASS

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2440MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

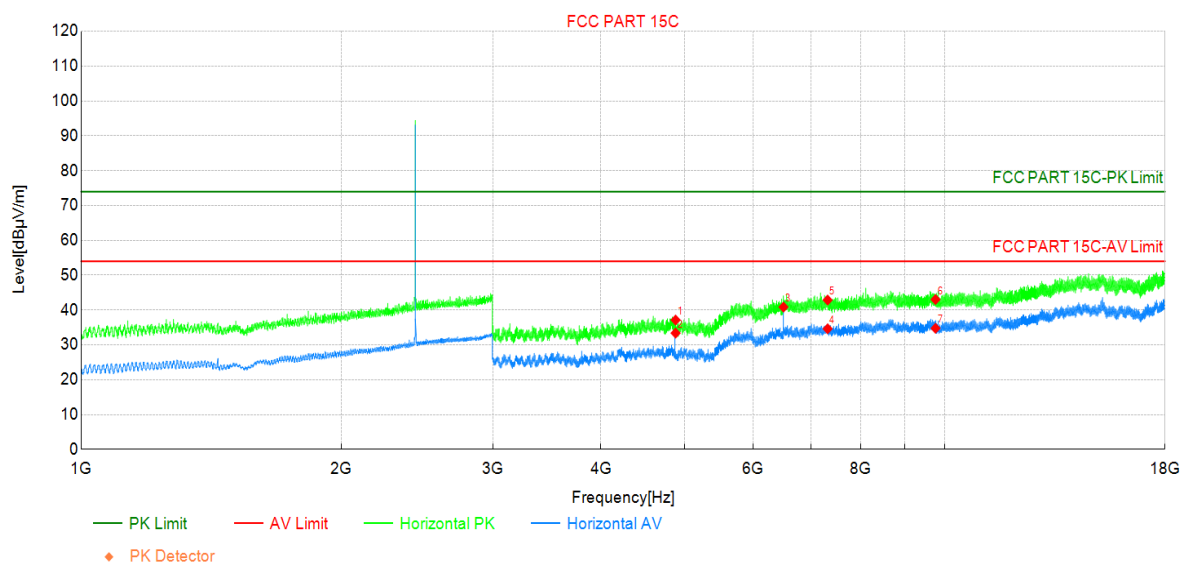

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.00	43.20	37.12	-6.08	74.00	36.88	PK	Horizo	PASS
2	4880.00	39.46	33.38	-6.08	54.00	20.62	AV	Horizo	PASS
3	6507.00	39.16	40.85	1.69	54.00	13.15	AV	Horizo	PASS
4	7320.00	31.81	34.61	2.80	54.00	19.39	AV	Horizo	PASS
5	7320.00	40.07	42.87	2.80	74.00	31.13	PK	Horizo	PASS
6	9760.00	36.89	43.02	6.13	74.00	30.98	PK	Horizo	PASS
7	9760.00	28.63	34.76	6.13	54.00	19.24	AV	Horizo	PASS

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2440MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Enginee	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

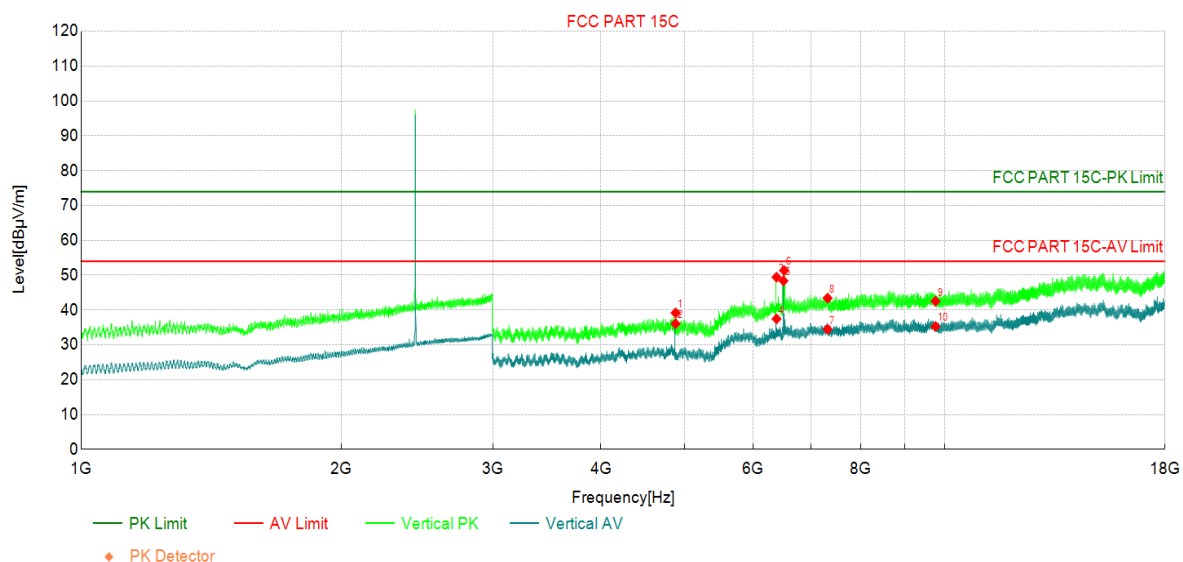

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.00	45.25	39.17	-6.08	74.00	34.83	PK	Vertic	PASS
2	4880.00	42.14	36.06	-6.08	54.00	17.94	AV	Vertic	PASS
3	6387.38	48.11	49.44	1.33	74.00	24.56	PK	Vertic	PASS
4	6387.75	36.14	37.47	1.33	54.00	16.53	AV	Vertic	PASS
5	6507.00	46.69	48.38	1.69	54.00	5.62	AV	Vertic	PASS
6	6519.00	49.58	51.34	1.76	74.00	22.66	PK	Vertic	PASS
7	7320.00	31.67	34.47	2.80	54.00	19.53	AV	Vertic	PASS
8	7320.00	40.61	43.41	2.80	74.00	30.59	PK	Vertic	PASS
9	9760.00	36.40	42.53	6.13	74.00	31.47	PK	Vertic	PASS
10	9760.00	29.13	35.26	6.13	54.00	18.74	AV	Vertic	PASS

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2480MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

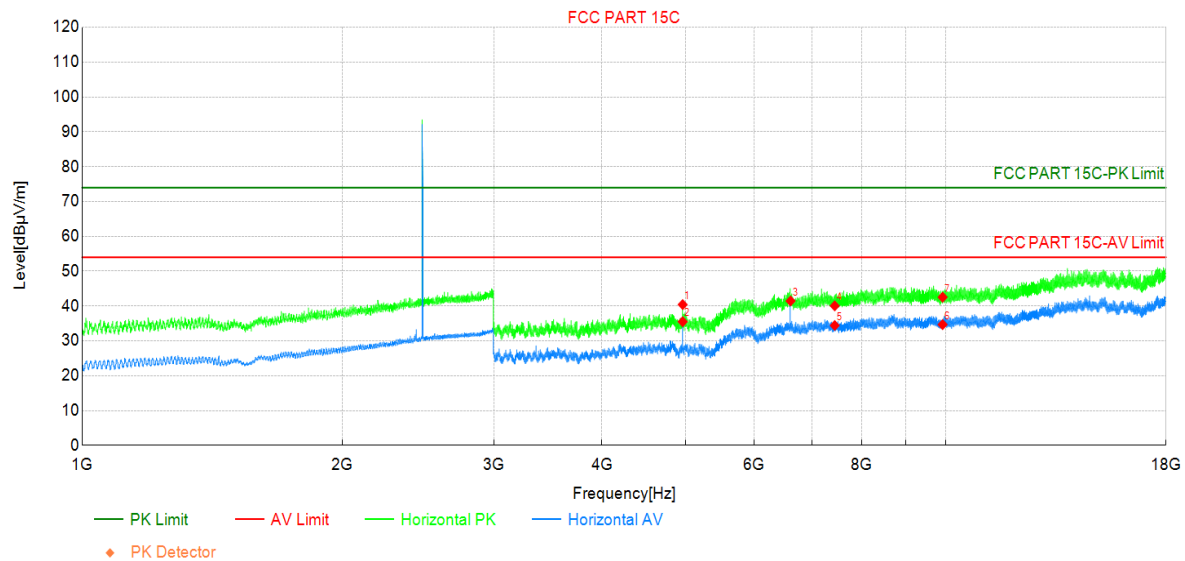

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960.00	45.68	40.41	-5.27	74.00	33.59	PK	Horizo	PASS
2	4960.00	40.77	35.50	-5.27	54.00	18.50	AV	Horizo	PASS
3	6613.50	39.29	41.45	2.16	54.00	12.55	AV	Horizo	PASS
4	7440.00	37.48	40.04	2.56	74.00	33.96	PK	Horizo	PASS
5	7440.00	31.85	34.41	2.56	54.00	19.59	AV	Horizo	PASS
6	9920.00	29.05	34.67	5.62	54.00	19.33	AV	Horizo	PASS
7	9920.00	36.91	42.53	5.62	74.00	31.47	PK	Horizo	PASS

Test Report

Project Information

Profile:	25B0571R	EUT:	Hearing aids
Mode:	BLE_1M:Transmit at 2480MHz by LE1M	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Reyn Chen
Test Standard:	FCC PART 15C		

Test Graph

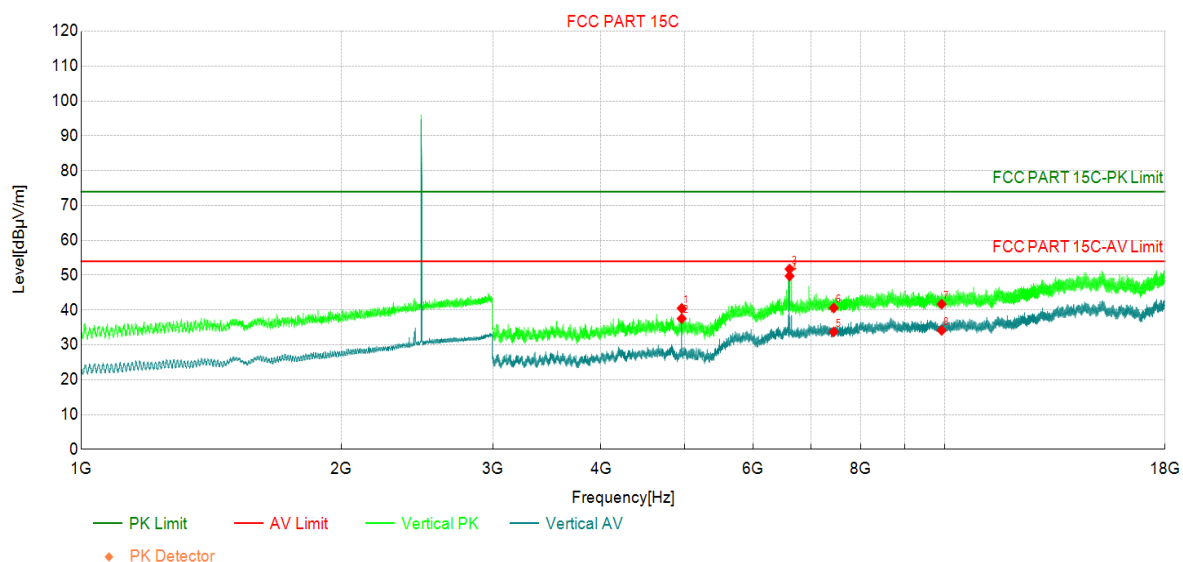

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960.00	45.75	40.48	-5.27	74.00	33.52	PK	Vertic	PASS
2	4960.00	42.81	37.54	-5.27	54.00	16.46	AV	Vertic	PASS
3	6613.50	49.58	51.74	2.16	74.00	22.26	PK	Vertic	PASS
4	6613.88	47.61	49.76	2.15	54.00	4.24	AV	Vertic	PASS
5	7440.00	31.16	33.72	2.56	54.00	20.28	AV	Vertic	PASS
6	7440.00	38.04	40.60	2.56	74.00	33.40	PK	Vertic	PASS
7	9920.00	36.07	41.69	5.62	74.00	32.31	PK	Vertic	PASS
8	9920.00	28.55	34.17	5.62	54.00	19.83	AV	Vertic	PASS