



FCC RF Test Report

APPLICANT : Fibocom Wireless Inc.
EQUIPMENT : 5G Dongle
BRAND NAME : Fibocom
MODEL NAME : ST151L-GL
FCC ID : ZMOST151LGL
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 19, 2026 ~ Apr. 16, 2026

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 LIST OF MEASURING EQUIPMENT	35
5 MEASUREMENT UNCERTAINTY	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR620905A	Rev. 01	Initial issue of report	Apr. 24, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.17 dB at 441.28 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.24 dB at 0.16 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Fibocom Wireless Inc.

1101,Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,Shenzhen, China.

1.2 Manufacturer

Fibocom Wireless Inc.

1101,Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,Shenzhen, China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Dongle
Brand Name	Fibocom
Model Name	ST151L-GL
FCC ID	ZMOST151LGL
SN Code	Conducted: ZR60SB0017 Radiation/Conduction: 2eab5620
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 16.76 dBm (0.0474 W) 802.11g : 21.30 dBm (0.1349 W) 802.11n HT20 : 20.80 dBm (0.1202 W) 802.11n HT40 : 20.31 dBm (0.1074 W) 802.11ac VHT20 : 20.71 dBm (0.1178 W) 802.11ac VHT40 : 20.30 dBm (0.1072 W)
99% Occupied Bandwidth	802.11b : 14.01MHz 802.11g : 16.79MHz 802.11n HT20 : 17.98MHz 802.11n HT40 : 36.58MHz
Antenna Type / Gain	PIFA Antenna type with gain 0.42 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

Note : For 802.11n HT20 /ac VHT20 and 802.11n HT40 /ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to the higher output power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ ; 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :LTE Band 5 Idle + WLAN Link(2.4G) + USB Cable Charging with NB
Remark: For Radiated Test Cases, The tests were performance with Notebook.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

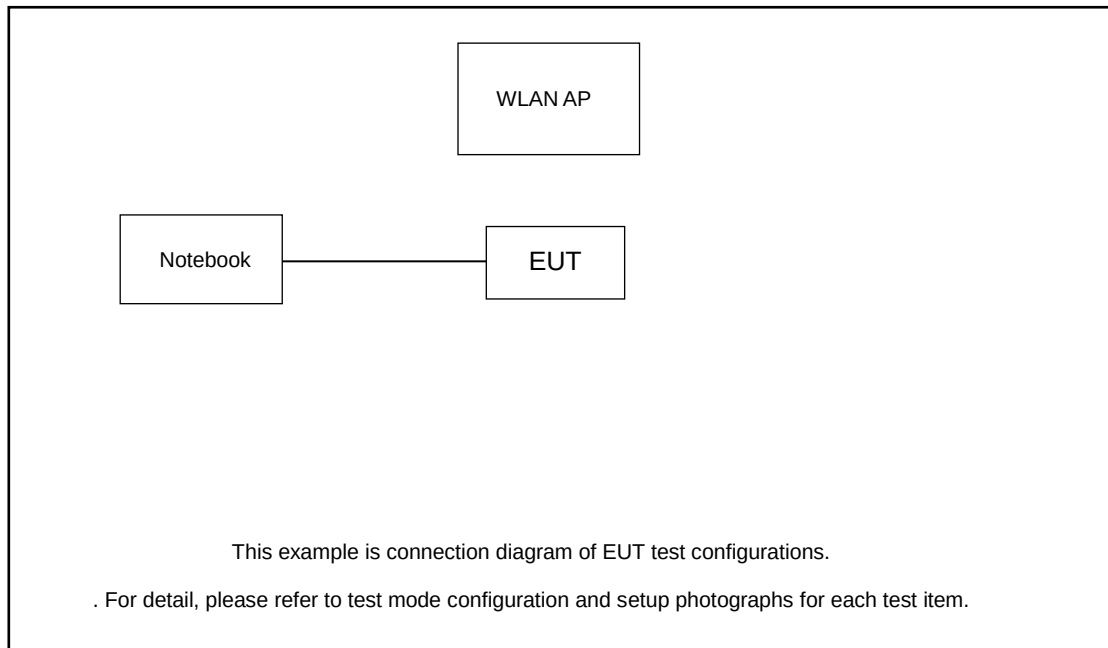

Radiated Emission:

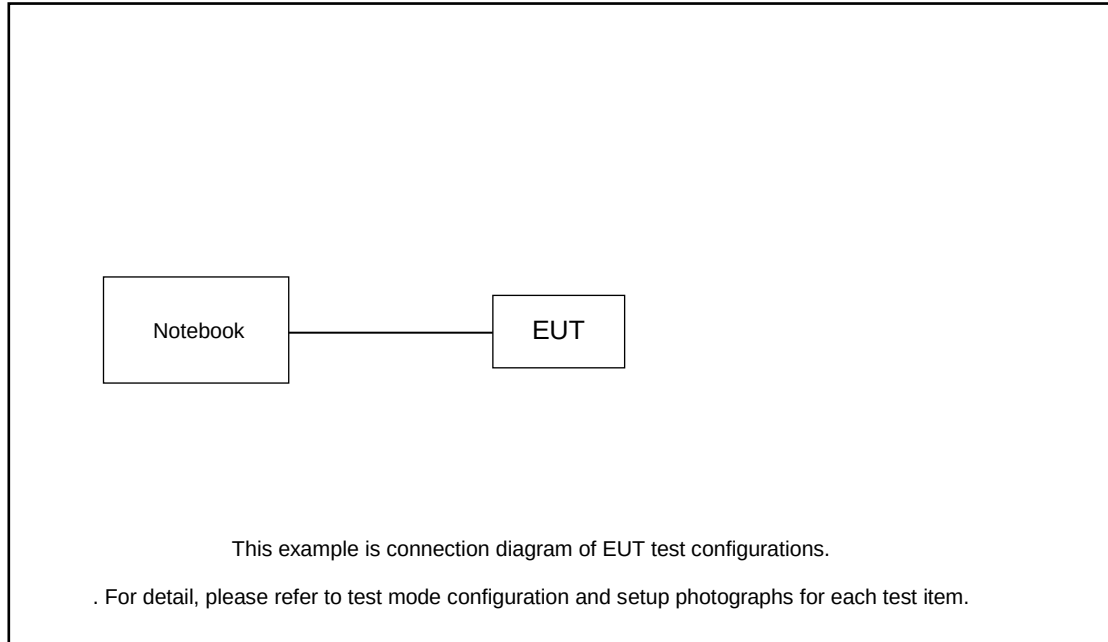

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	MC525 ZP/A	Fcc DoC	N/A	Shielded, 1.0m
2.	Notebook	Thinkpad	Thinkpad E14	N/A	N/A	N/A
3.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 2.7m with Core
4.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.30 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.30 + 10 = 11.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup

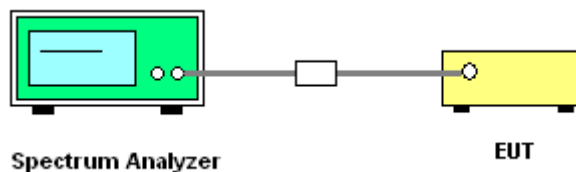



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

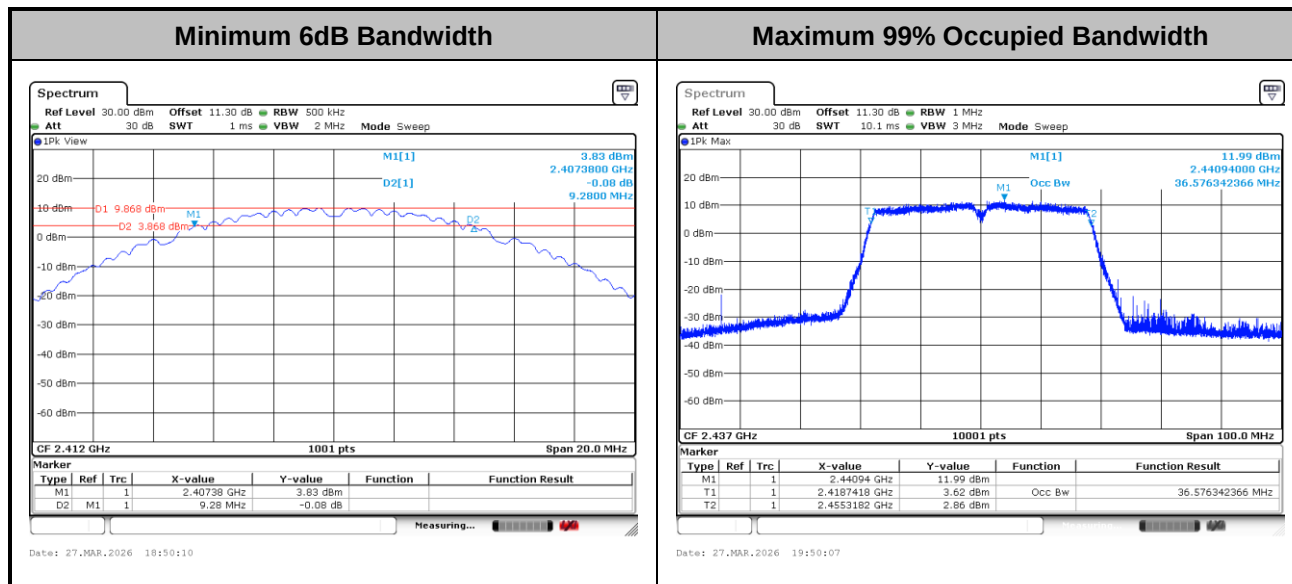

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

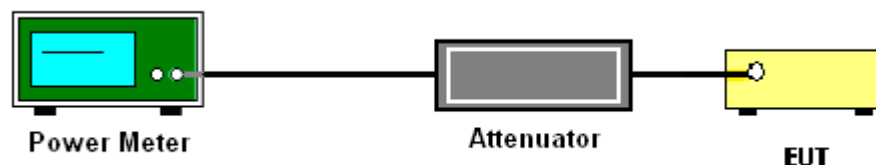

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

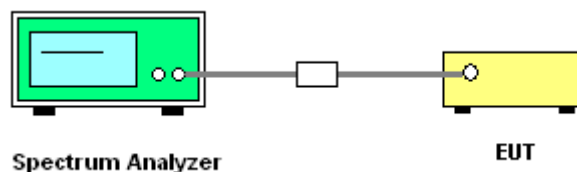



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

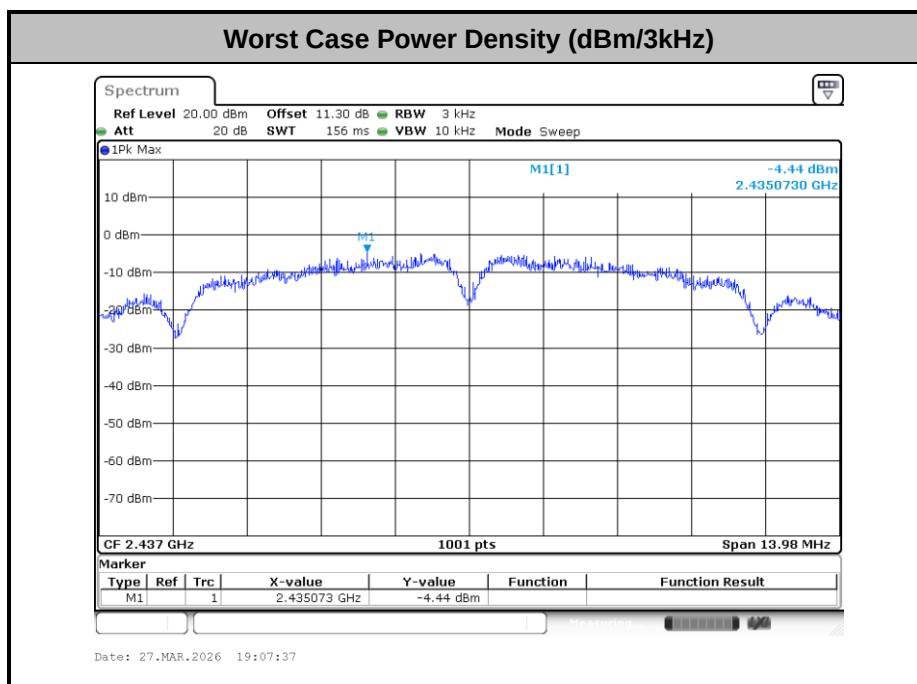

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

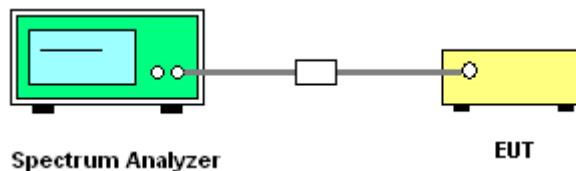




3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Ken Hsu	Temperature :	19~21°C
		Relative Humidity :	44~46%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

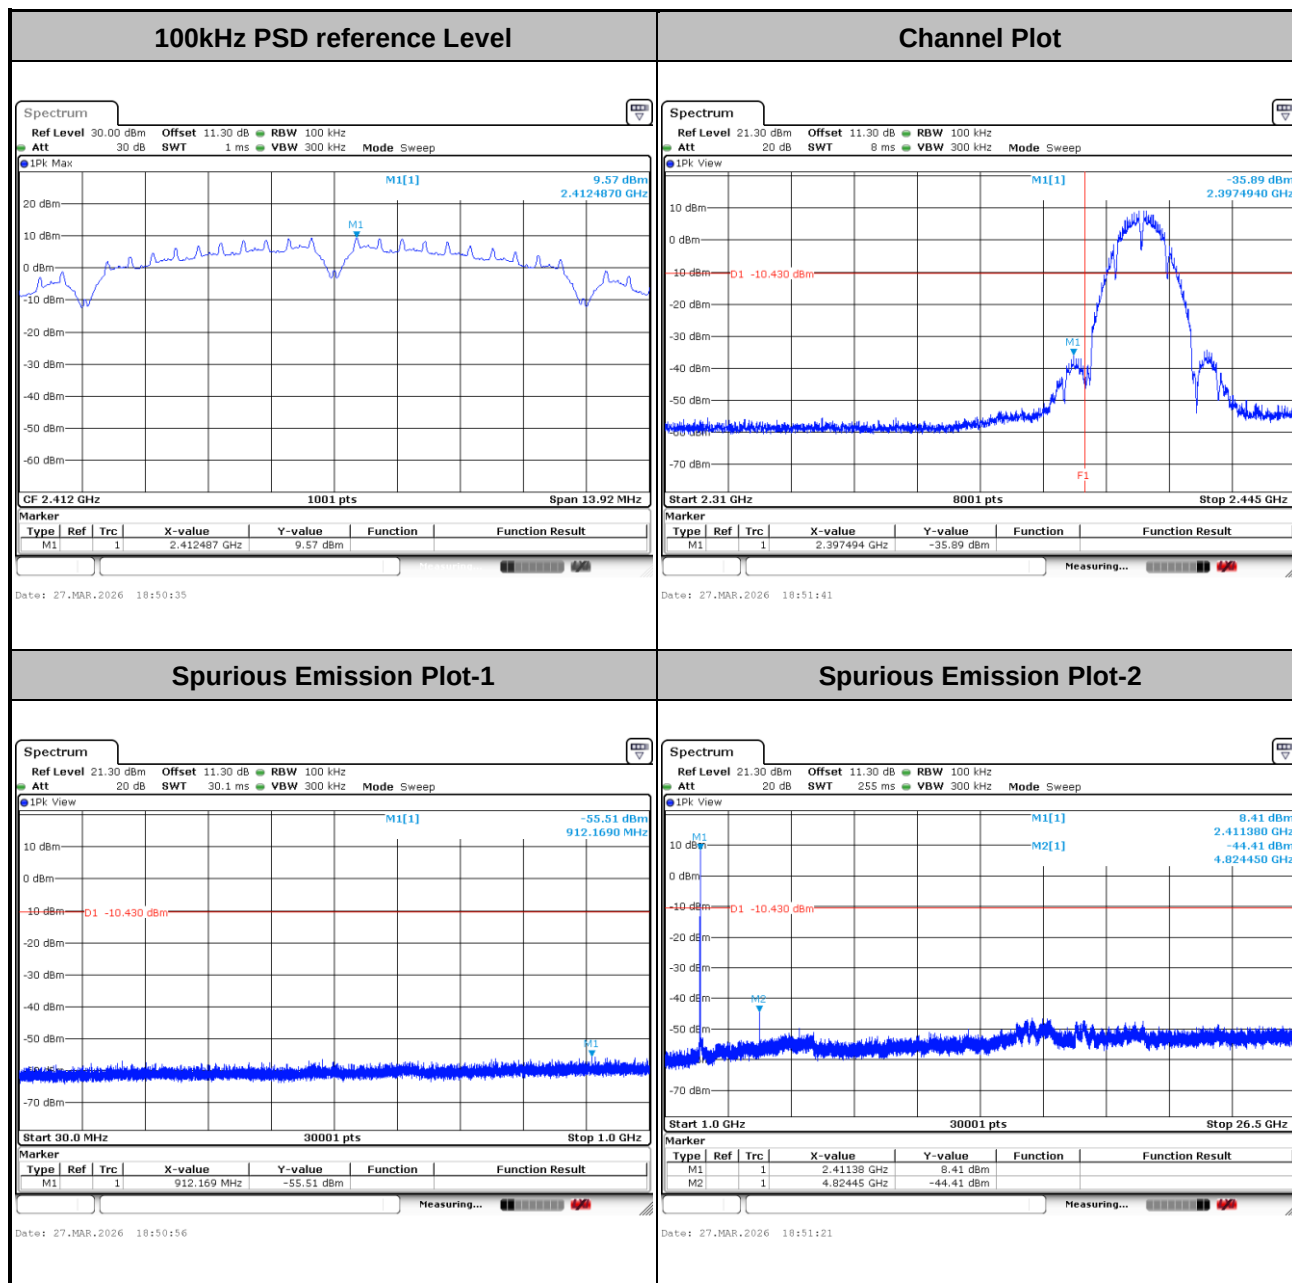




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

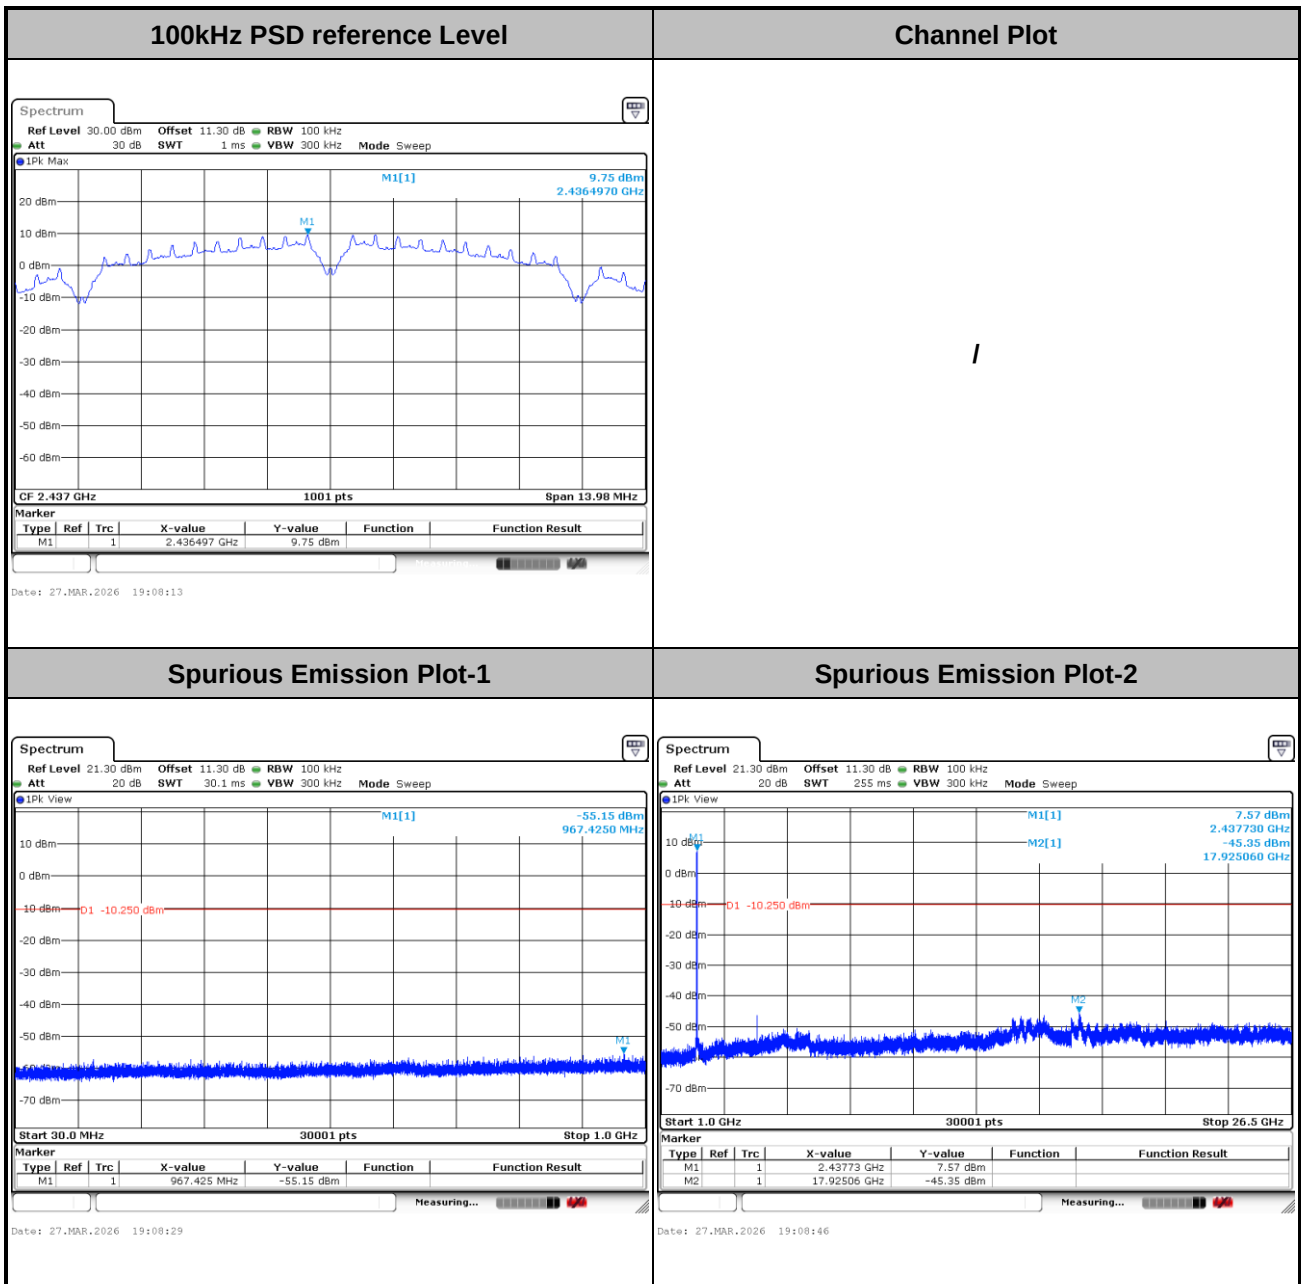




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

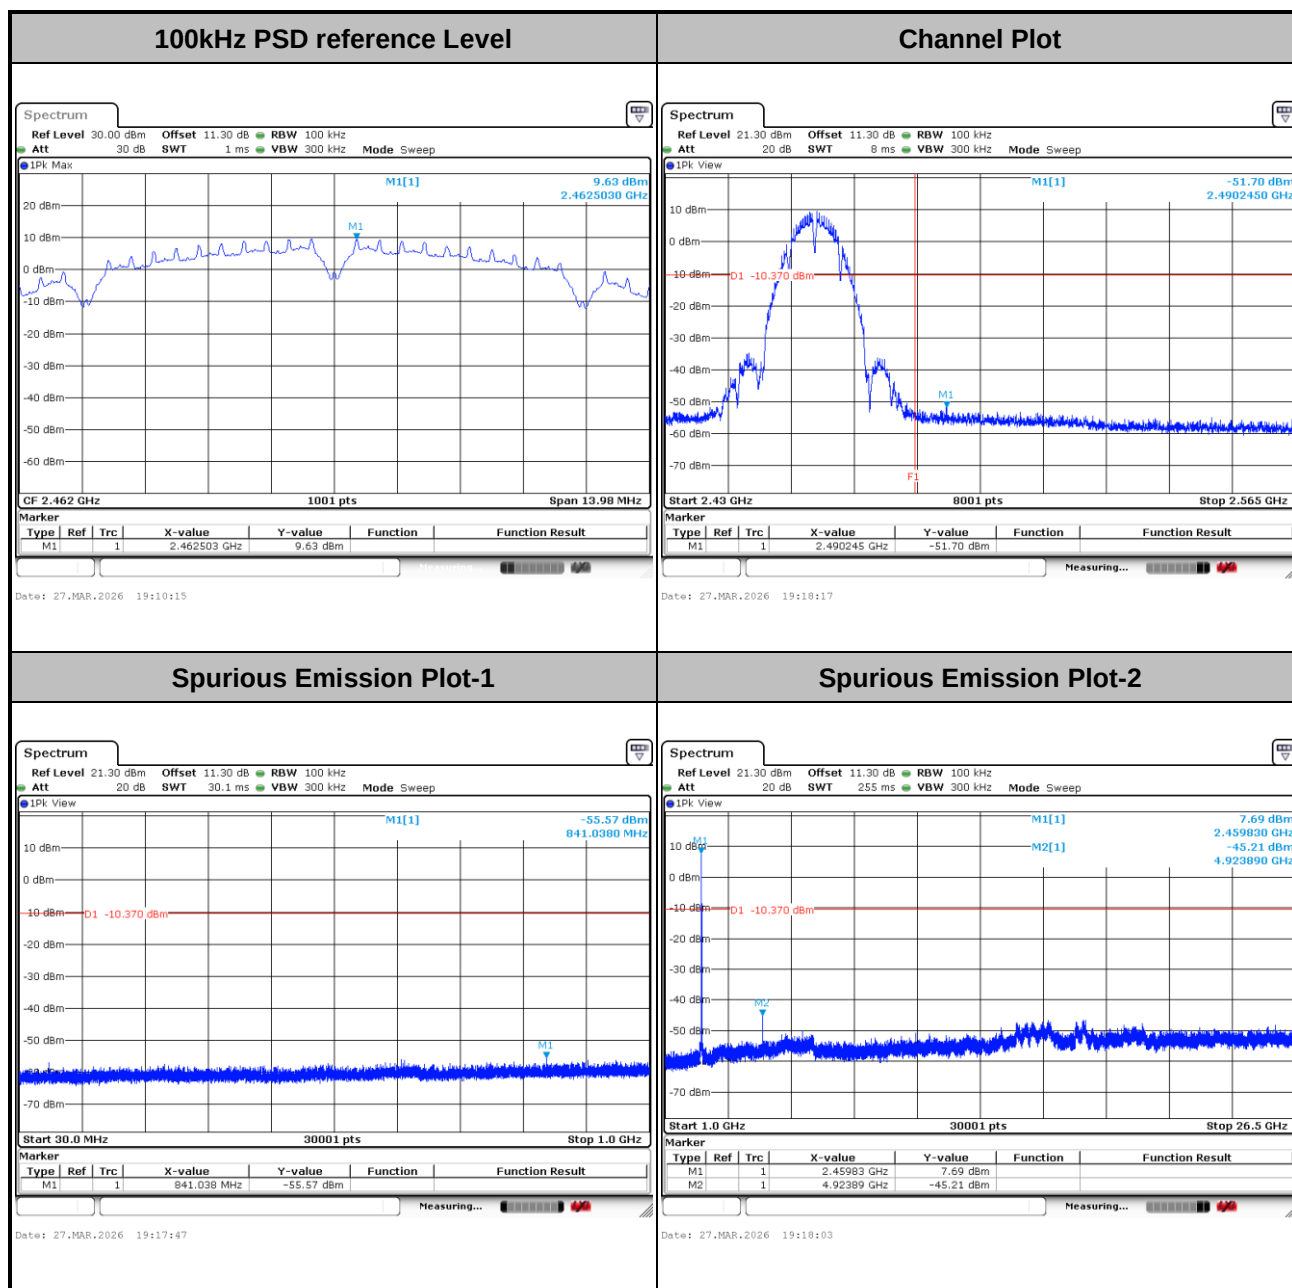




Test Mode : 802.11g Test Channel : 01


100kHz PSD reference Level

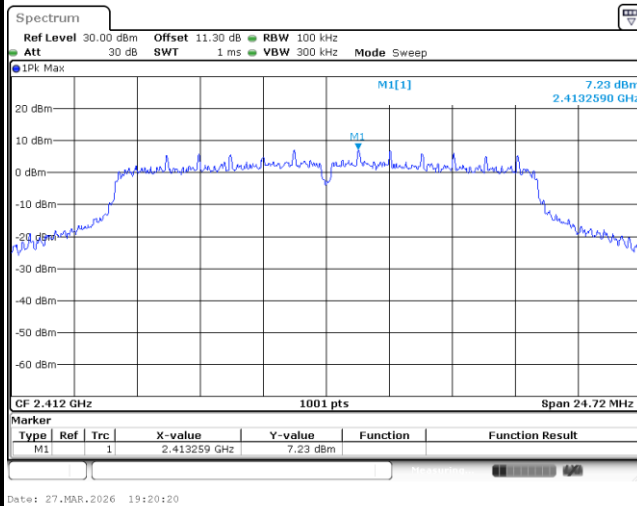


Channel Plot

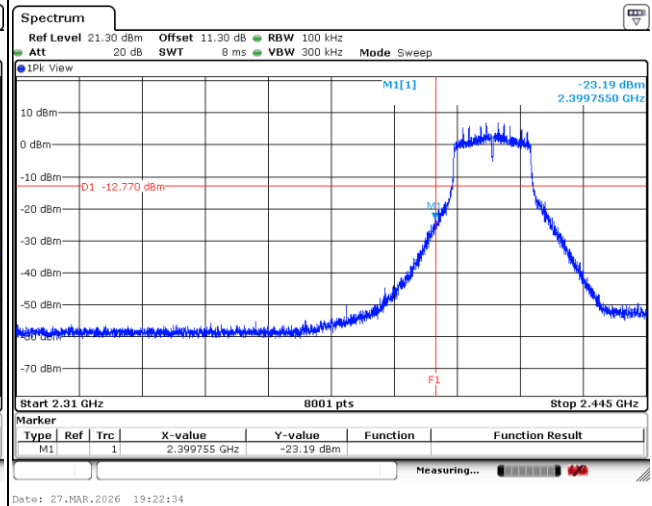

Spurious Emission Plot-1

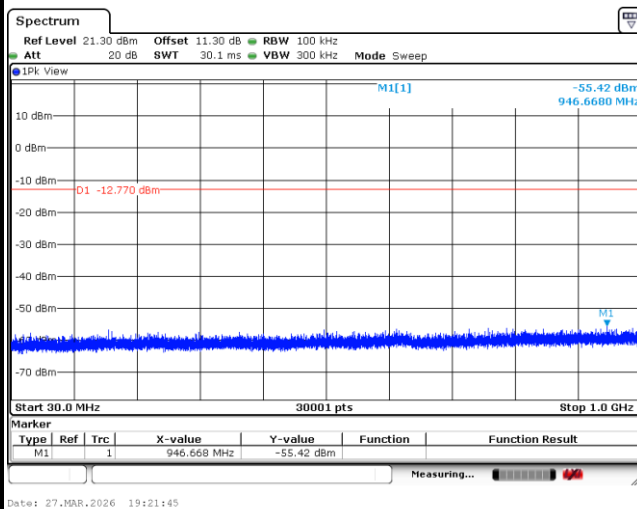


Spurious Emission Plot-2

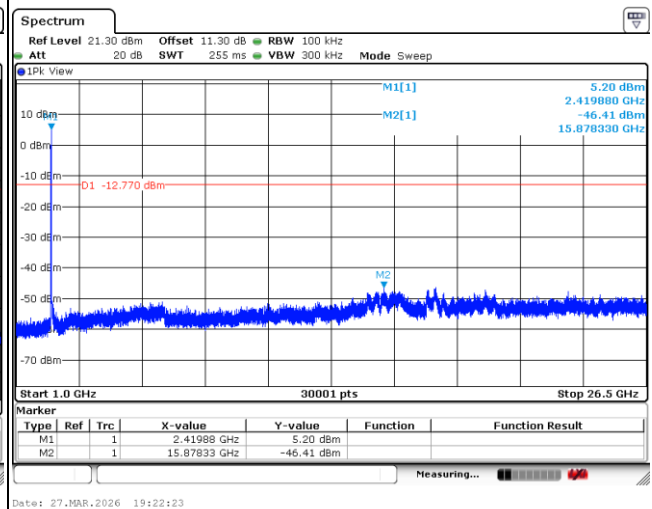




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

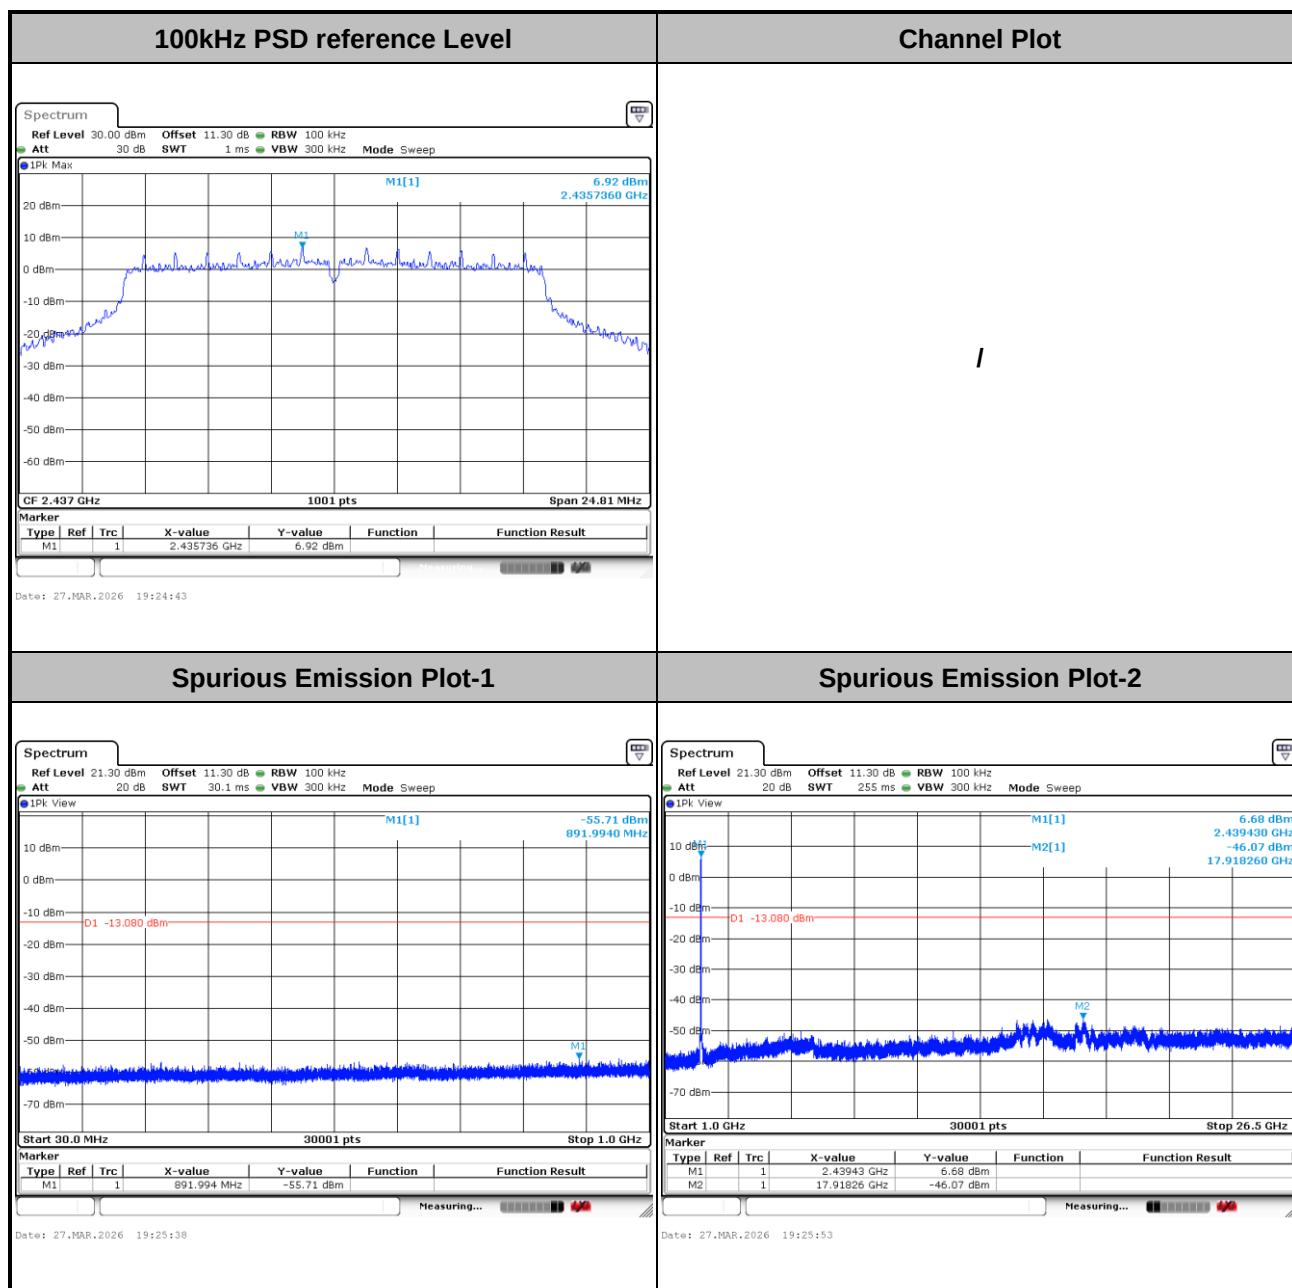




Test Mode : 802.11g Test Channel : 11


100kHz PSD reference Level

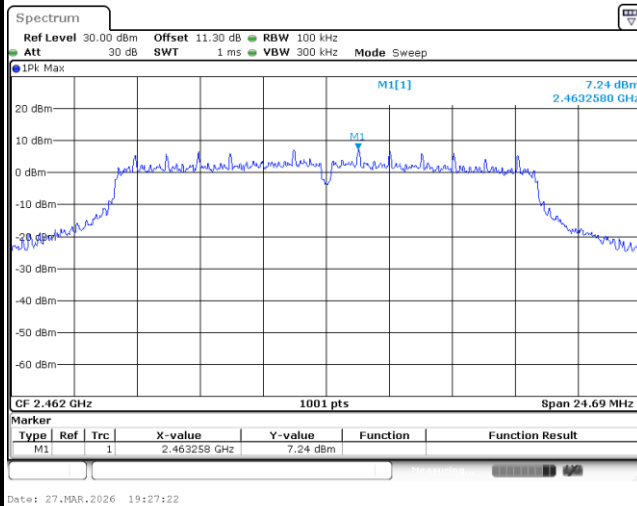


Channel Plot

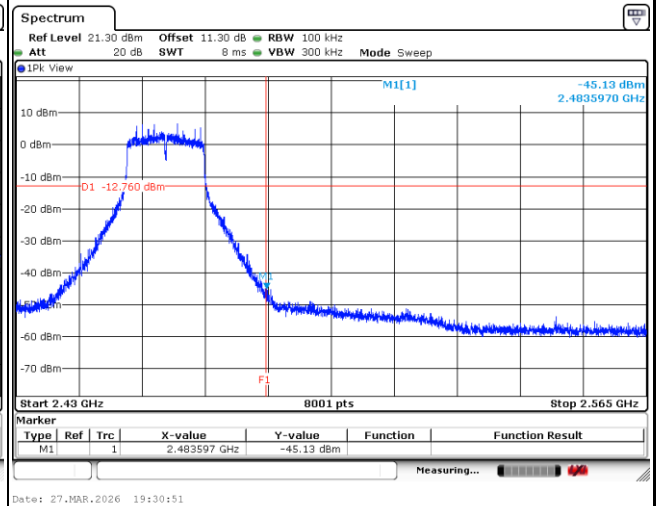

Spurious Emission Plot-1

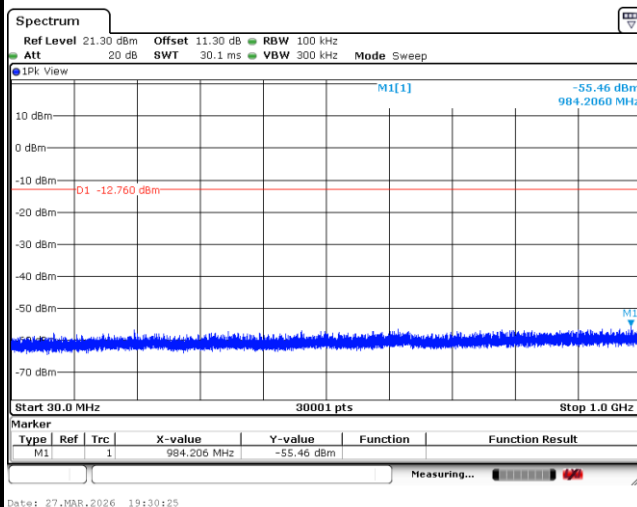

Spurious Emission Plot-2

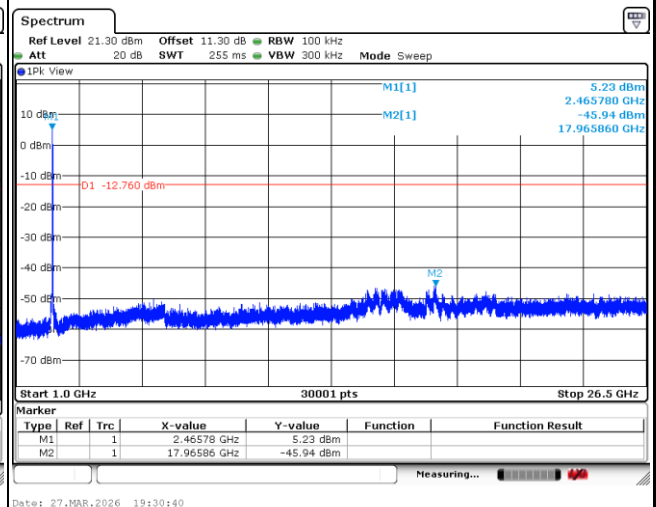





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

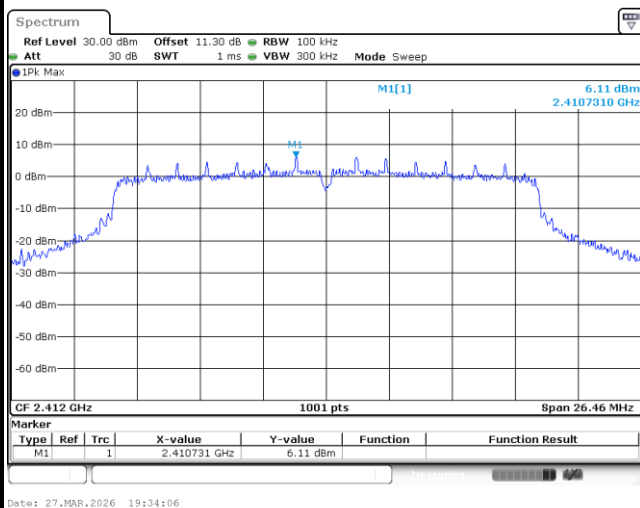


Channel Plot

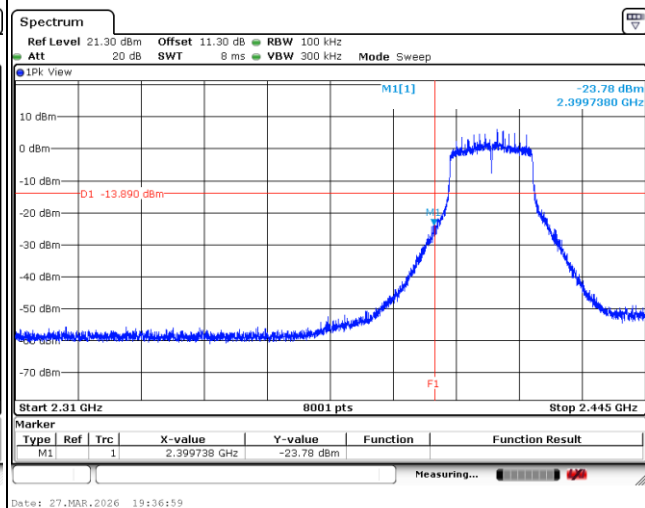

Spurious Emission Plot-1

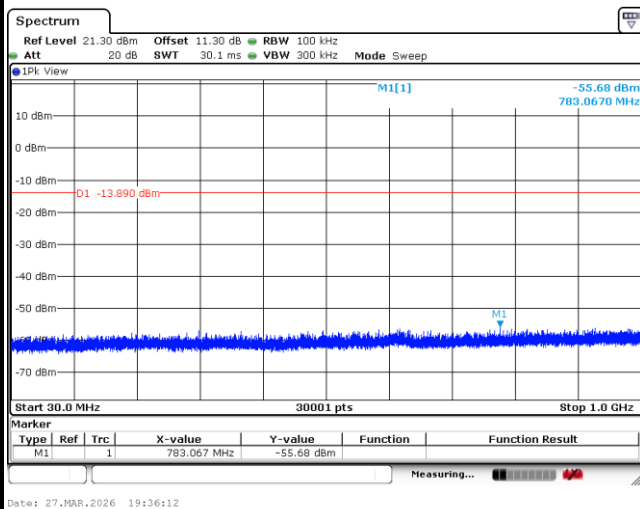


Spurious Emission Plot-2

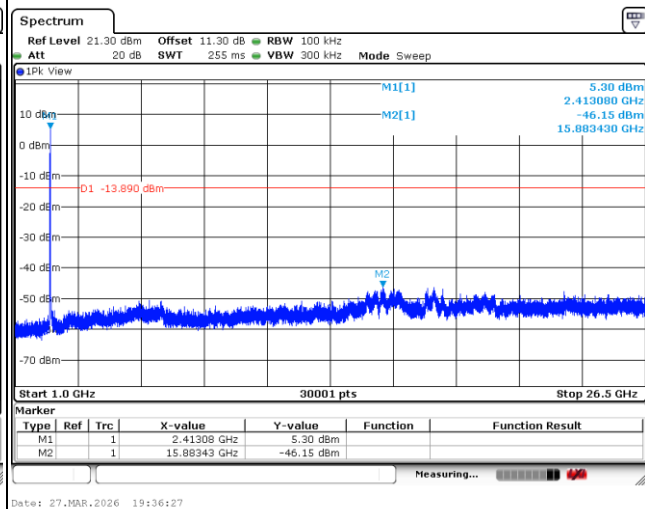




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

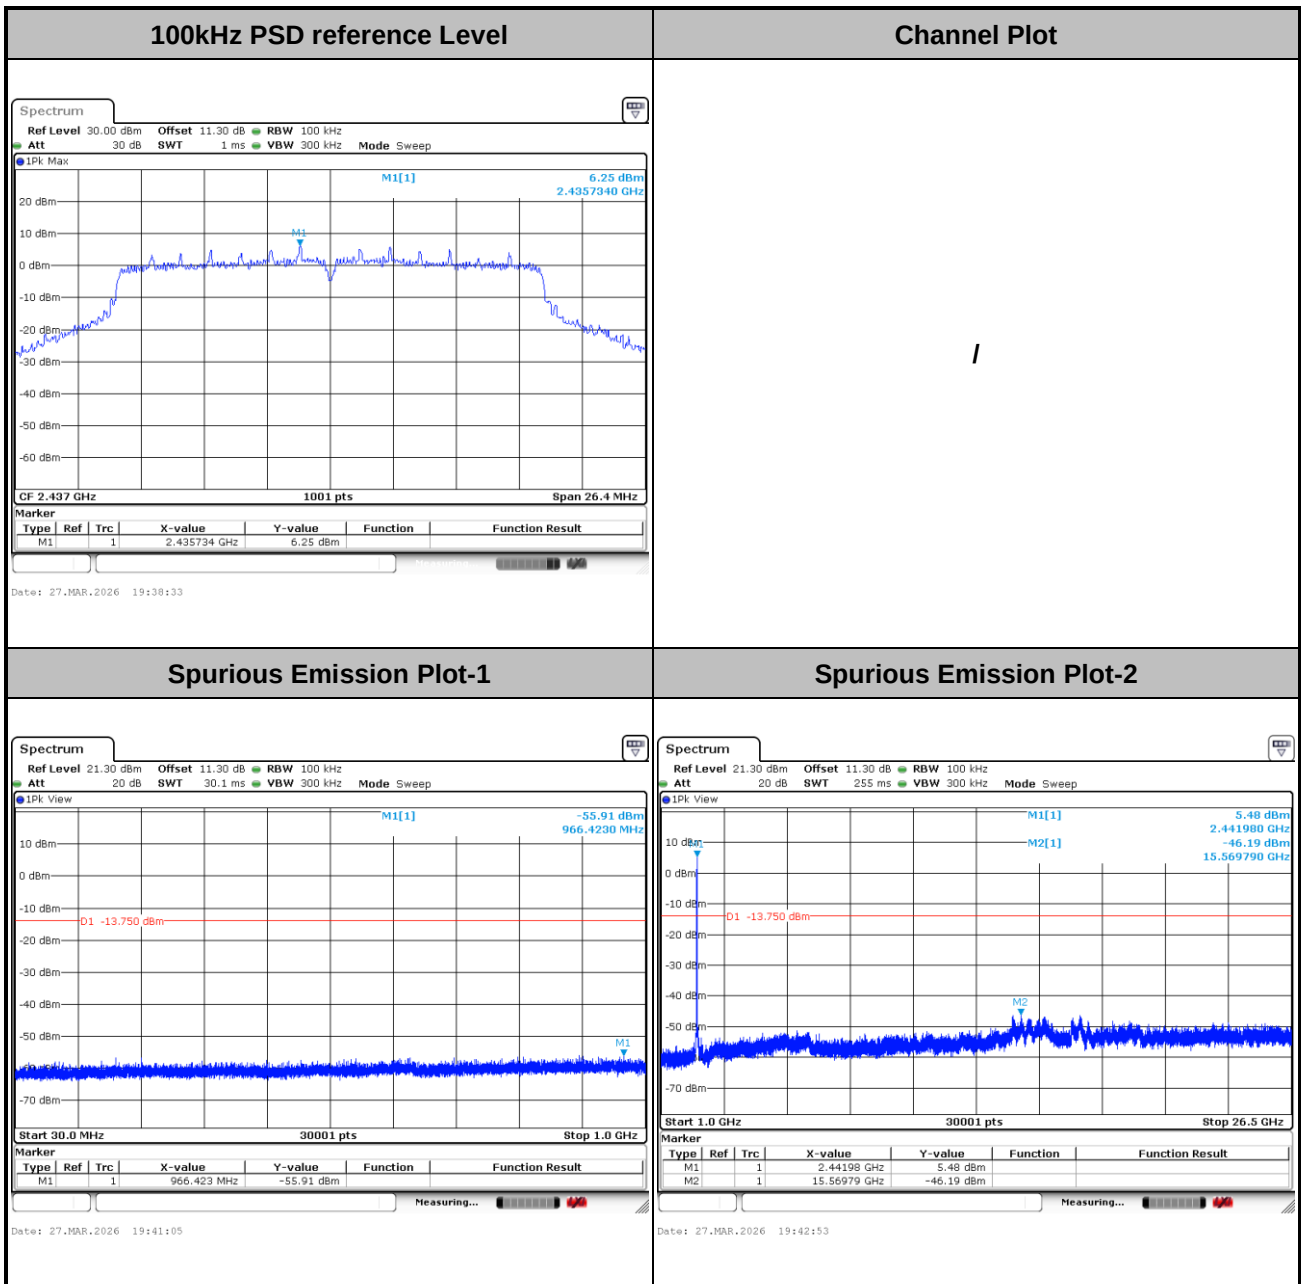




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

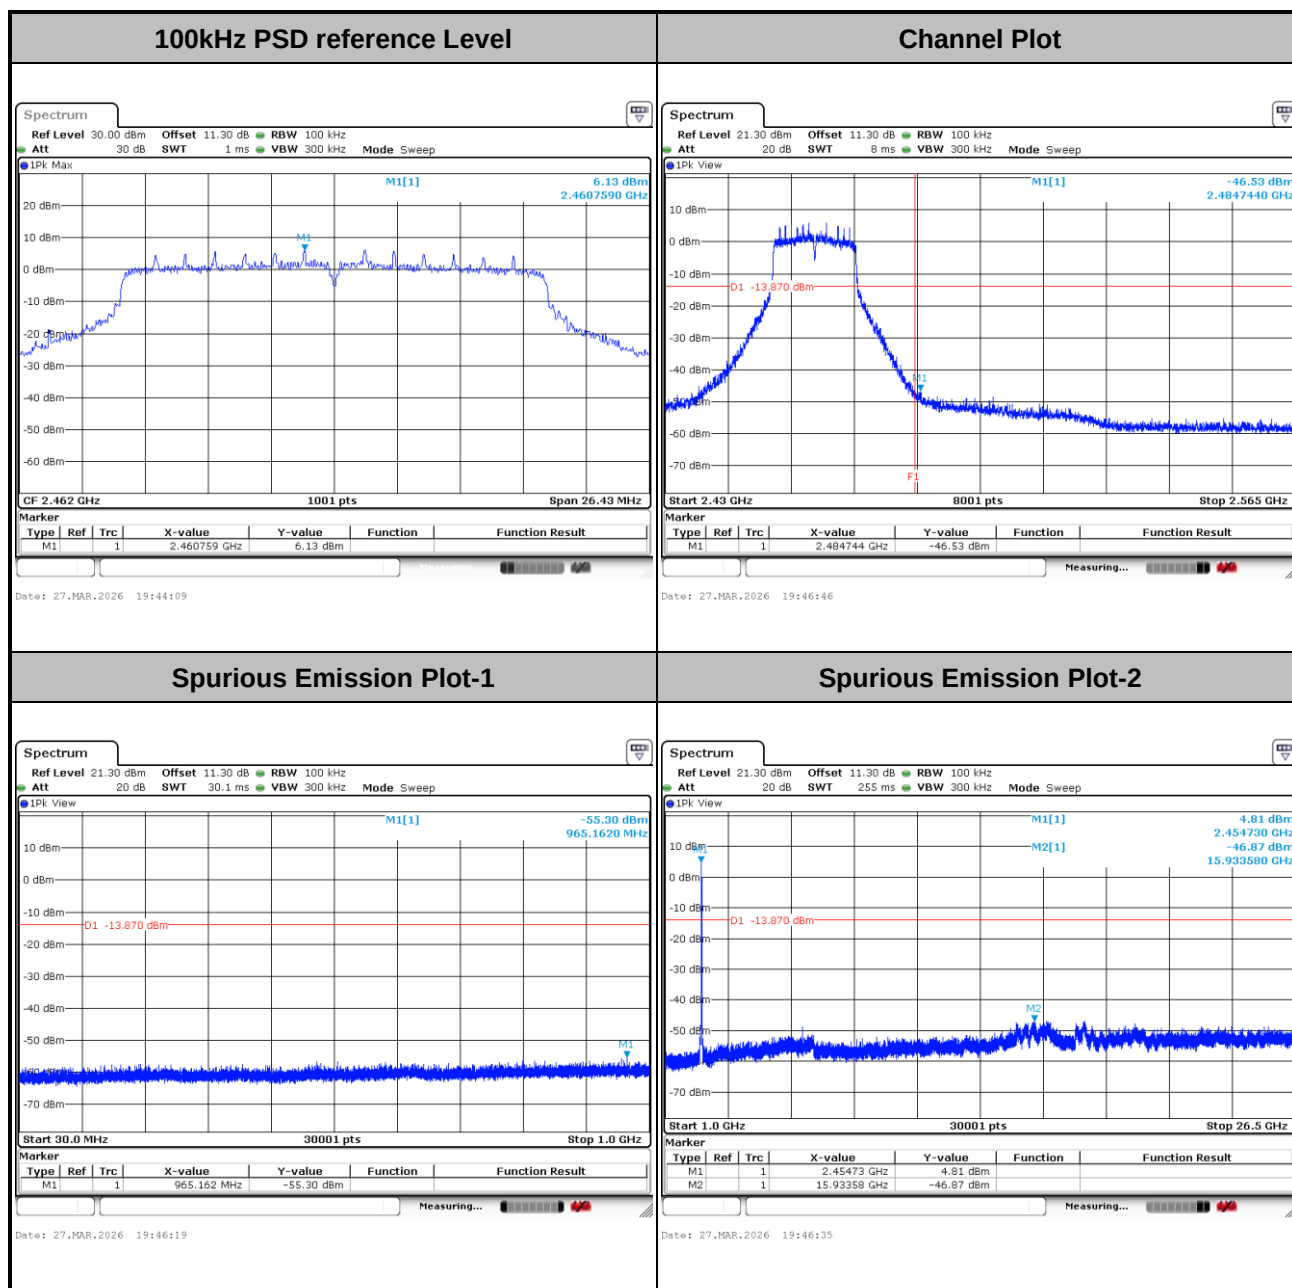




Test Mode : 802.11n HT40 Test Channel : 03


100kHz PSD reference Level

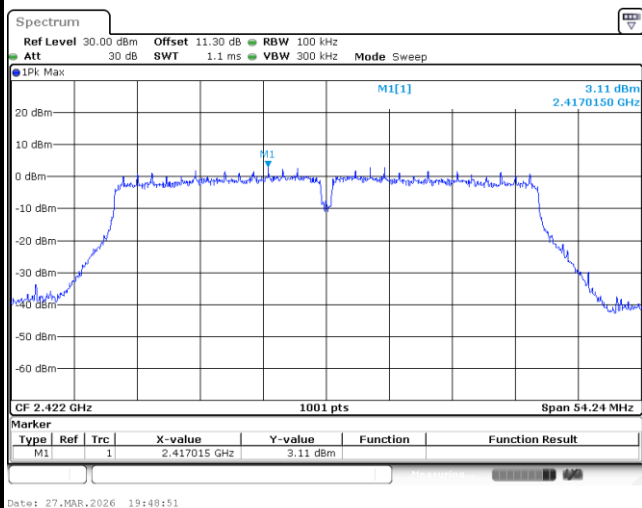


Channel Plot

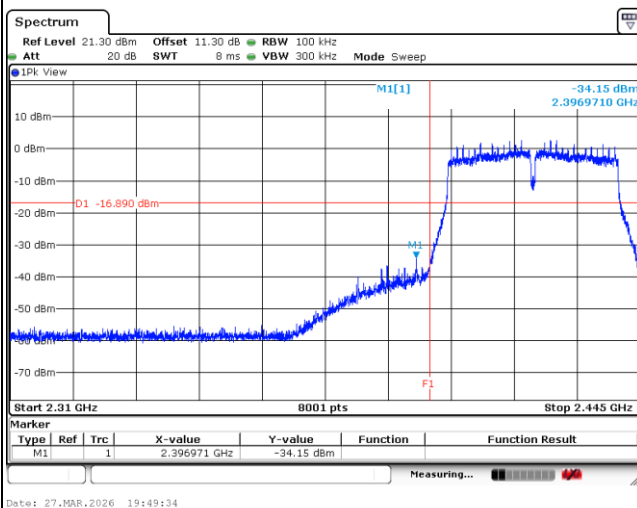

Spurious Emission Plot-1

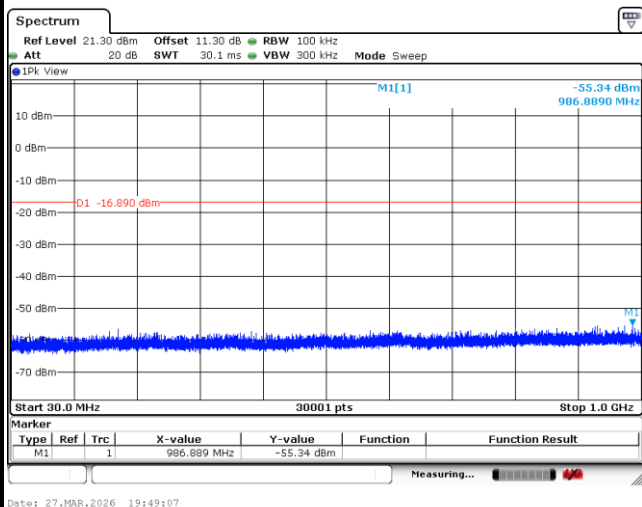


Spurious Emission Plot-2

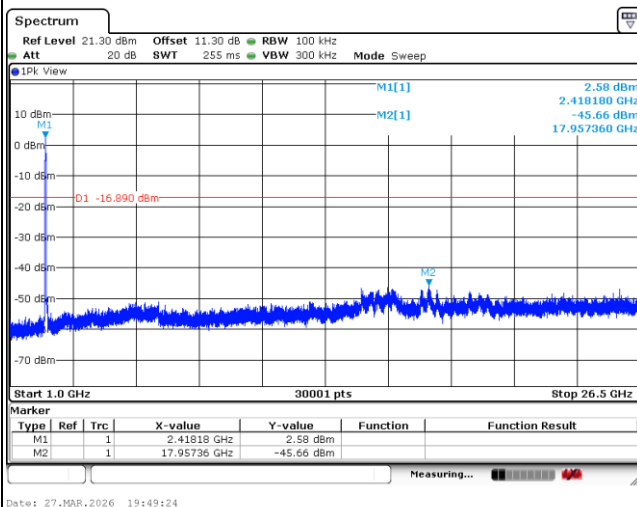



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

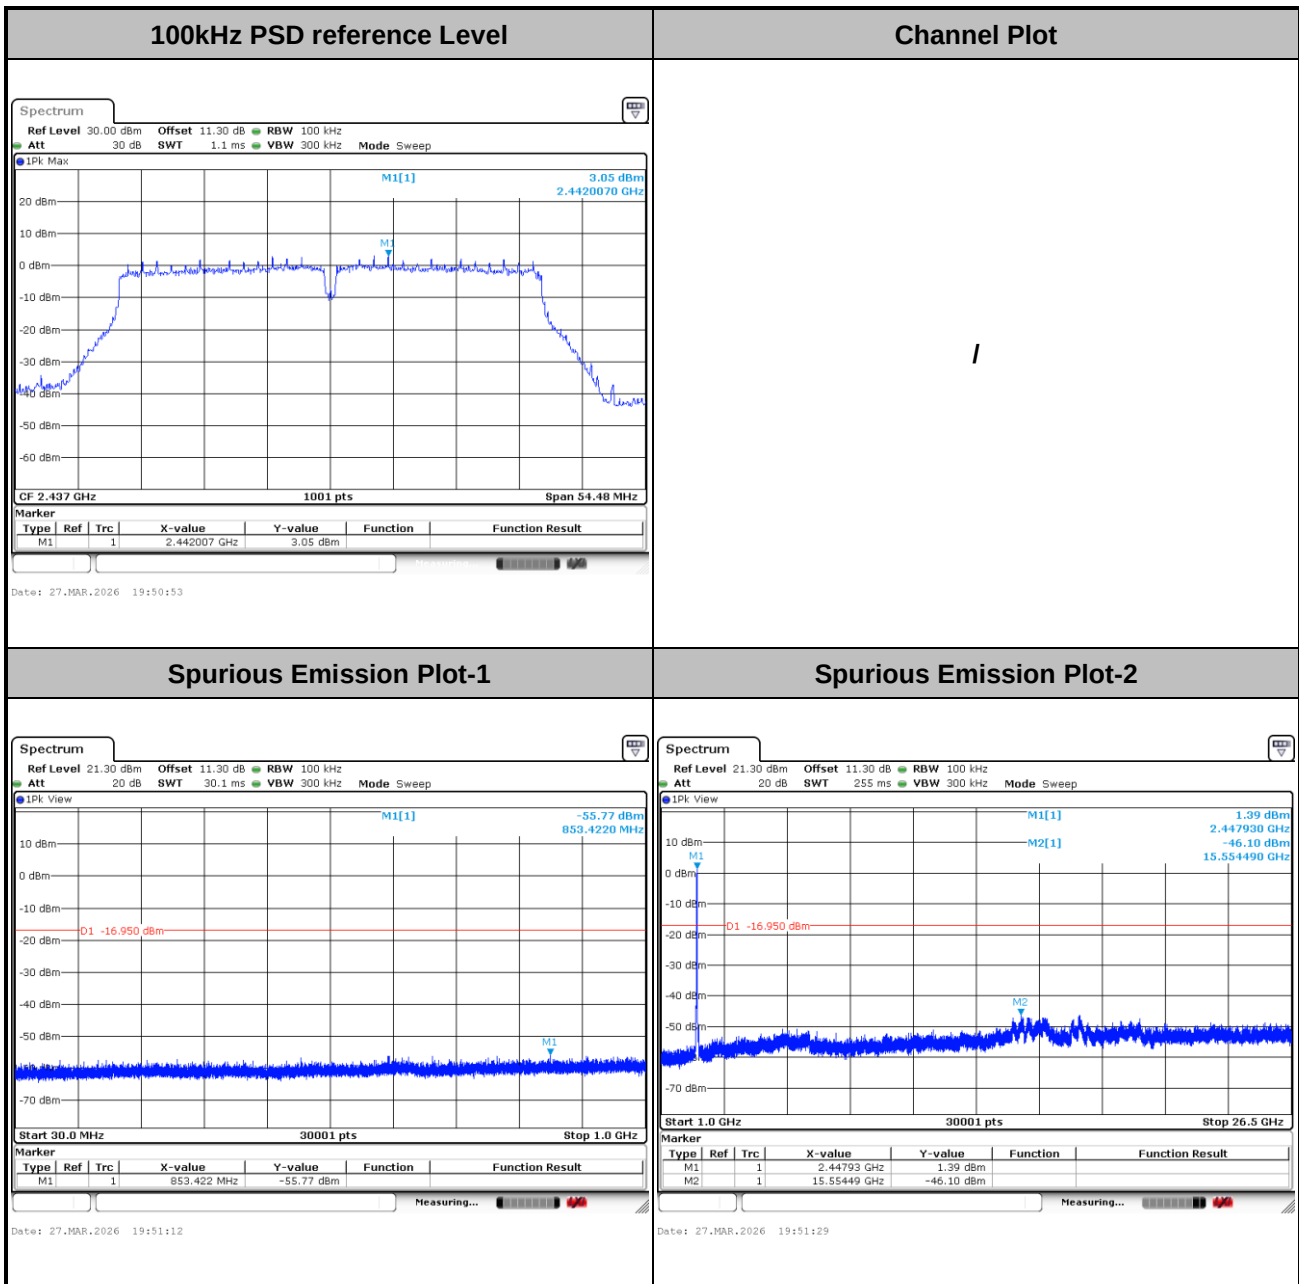





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

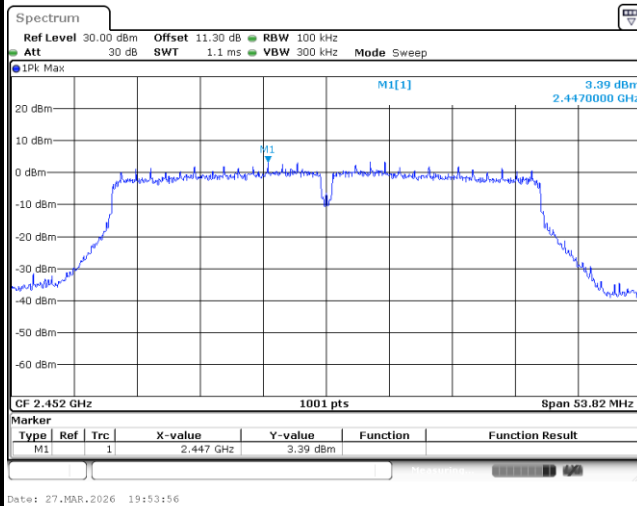


Channel Plot

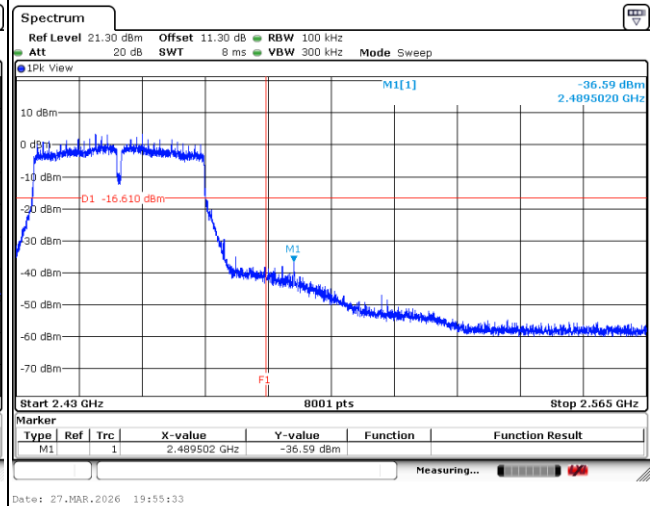

Spurious Emission Plot-1

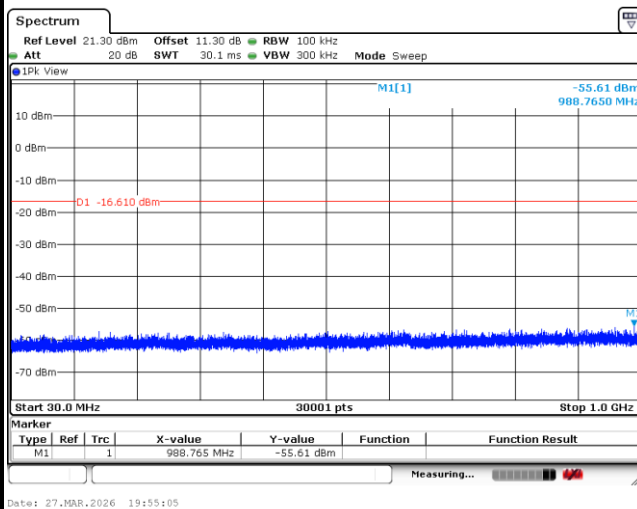

Spurious Emission Plot-2

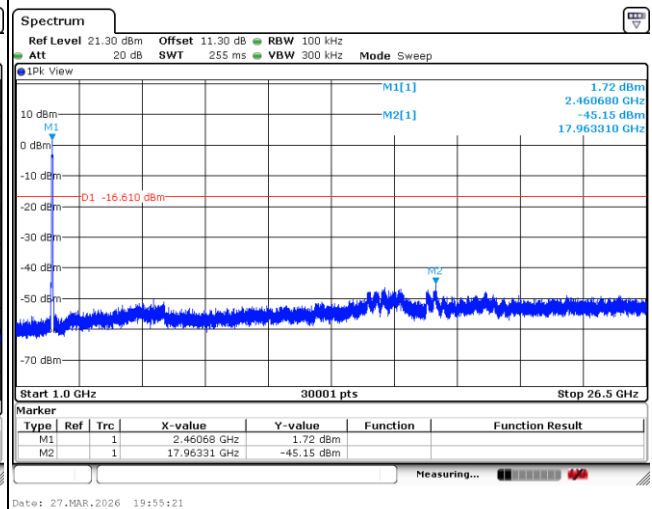

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

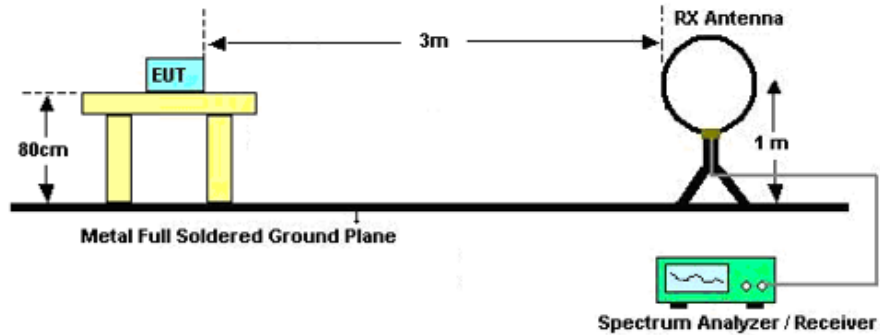

For radiated emissions from 30MHz to 1GHz

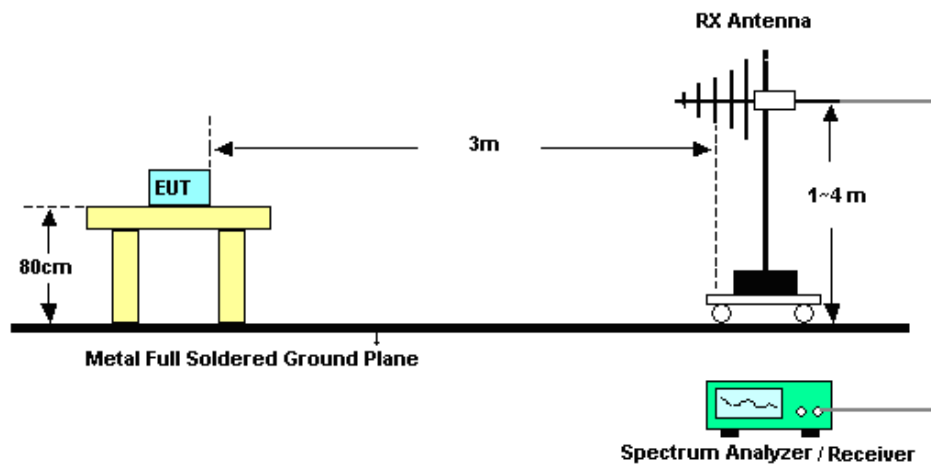

For radiated emissions above 1GHz

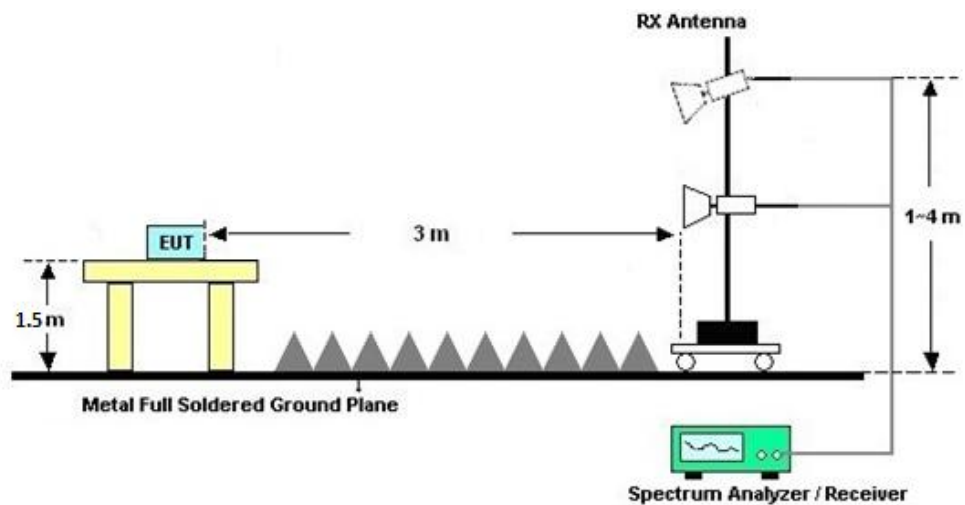

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

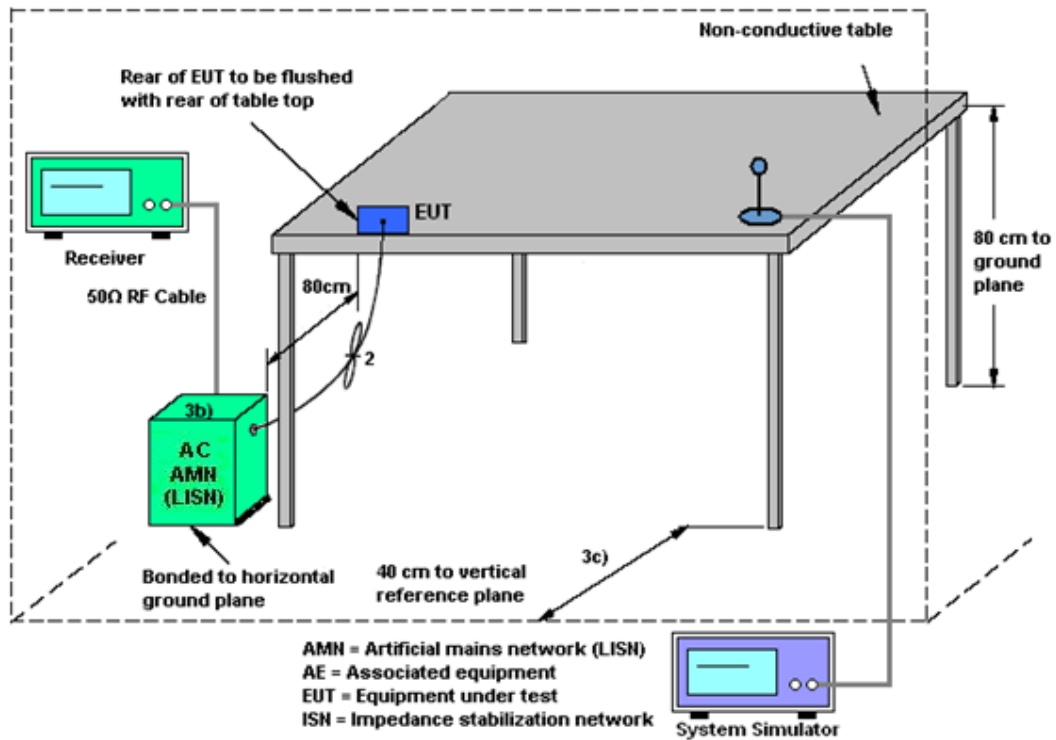

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 24, 2025	Mar. 23, 2026~Apr. 16, 2026	Dec. 23, 2026	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Mar. 23, 2026~Apr. 16, 2026	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 26, 2025	Mar. 23, 2026~Apr. 16, 2026	Dec. 25, 2026	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Dec. 23, 2025	Mar. 23, 2026~Apr. 16, 2026	Dec. 22, 2026	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 16, 2025	Mar. 23, 2026~Apr. 16, 2026	Jul. 15, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03,2025	Mar. 23, 2026~Apr. 16, 2026	Apr. 02,2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 24, 2025	Mar. 23, 2026~Apr. 16, 2026	Dec. 23, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 13,2025	Mar. 23, 2026~Apr. 16, 2026	Oct. 12,2026	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 13,2025	Mar. 23, 2026~Apr. 16, 2026	Oct. 12,2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 02, 2025	Mar. 23, 2026~Apr. 16, 2026	Jul. 01, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14,2025	Mar. 23, 2026~Apr. 16, 2026	Oct. 13,2026	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 23, 2026~Apr. 16, 2026	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 23, 2026~Apr. 16, 2026	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Mar. 19, 2026	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Mar. 19, 2026	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.14, 2025	Mar. 19, 2026	Dec. 13, 2026	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Mar. 26, 2026	Mar. 27, 2026	Mar. 25, 2027	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Mar. 27, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.13,2025	Mar. 27, 2026	Oct. 12, 2026	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Cheng Lin	Temperature:	21~25	°C
Test Date:	2026/3/27	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1		Ant 1
11b	1Mbps	1	1	2412	14.40	30.00	0.42	14.82	36.00	Pass	14.00
11b	1Mbps	1	6	2437	14.50	30.00	0.42	14.92	36.00	Pass	15.50
11b	1Mbps	1	11	2462	15.10	30.00	0.42	15.52	36.00	Pass	15.50
11g	6Mbps	1	1	2412	14.60	30.00	0.42	15.02	36.00	Pass	14.50
11g	6Mbps	1	6	2437	17.10	30.00	0.42	17.52	36.00	Pass	18.00
11g	6Mbps	1	11	2462	14.10	30.00	0.42	14.52	36.00	Pass	14.50
HT20	MCS0	1	1	2412	14.20	30.00	0.42	14.62	36.00	Pass	14.00
HT20	MCS0	1	6	2437	16.20	30.00	0.42	16.62	36.00	Pass	17.50
HT20	MCS0	1	11	2462	13.30	30.00	0.42	13.72	36.00	Pass	14.00
HT40	MCS0	1	3	2422	9.20	30.00	0.42	9.62	36.00	Pass	9.00
HT40	MCS0	1	4	2427	10.20	30.00	0.42	10.62	36.00	Pass	10.00
HT40	MCS0	1	5	2432	13.20	30.00	0.42	13.62	36.00	Pass	13.00
HT40	MCS0	1	6	2437	14.20	30.00	0.42	14.62	36.00	Pass	14.50
HT40	MCS0	1	8	2447	11.50	30.00	0.42	11.92	36.00	Pass	11.50
HT40	MCS0	1	9	2452	10.00	30.00	0.42	10.42	36.00	Pass	10.00
VHT20	MCS0	1	1	2412	14.10	30.00	0.42	14.52	36.00	Pass	14.00
VHT20	MCS0	1	6	2437	16.10	30.00	0.42	16.52	36.00	Pass	17.50
VHT20	MCS0	1	11	2462	13.20	30.00	0.42	13.62	36.00	Pass	14.00
VHT40	MCS0	1	3	2422	9.10	30.00	0.42	9.52	36.00	Pass	9.00
VHT40	MCS0	1	4	2427	10.10	30.00	0.42	10.52	36.00	Pass	10.00
VHT40	MCS0	1	5	2432	13.10	30.00	0.42	13.52	36.00	Pass	13.00
VHT40	MCS0	1	6	2437	14.10	30.00	0.42	14.52	36.00	Pass	14.50
VHT40	MCS0	1	8	2447	11.40	30.00	0.42	11.82	36.00	Pass	11.50
VHT40	MCS0	1	9	2452	9.90	30.00	0.42	10.32	36.00	Pass	10.00

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	16.49	30.00	0.42	16.91	36.00	Pass
11b	1Mbps	1	6	2437	16.13	30.00	0.42	16.55	36.00	Pass
11b	1Mbps	1	11	2462	16.76	30.00	0.42	17.18	36.00	Pass
11g	6Mbps	1	1	2412	19.21	30.00	0.42	19.63	36.00	Pass
11g	6Mbps	1	6	2437	21.30	30.00	0.42	21.72	36.00	Pass
11g	6Mbps	1	11	2462	18.37	30.00	0.42	18.79	36.00	Pass
HT20	MCS0	1	1	2412	18.76	30.00	0.42	19.18	36.00	Pass
HT20	MCS0	1	6	2437	20.80	30.00	0.42	21.22	36.00	Pass
HT20	MCS0	1	11	2462	17.82	30.00	0.42	18.24	36.00	Pass
HT40	MCS0	1	3	2422	15.45	30.00	0.42	15.87	36.00	Pass
HT40	MCS0	1	4	2427	16.44	30.00	0.42	16.86	36.00	Pass
HT40	MCS0	1	5	2432	19.12	30.00	0.42	19.54	36.00	Pass
HT40	MCS0	1	6	2437	20.31	30.00	0.42	20.73	36.00	Pass
HT40	MCS0	1	8	2447	17.44	30.00	0.42	17.86	36.00	Pass
HT40	MCS0	1	9	2452	15.94	30.00	0.42	16.36	36.00	Pass
VHT20	MCS0	1	1	2412	18.74	30.00	0.42	19.16	36.00	Pass
VHT20	MCS0	1	6	2437	20.71	30.00	0.42	21.13	36.00	Pass
VHT20	MCS0	1	11	2462	17.76	30.00	0.42	18.18	36.00	Pass
VHT40	MCS0	1	3	2422	15.23	30.00	0.42	15.65	36.00	Pass
VHT40	MCS0	1	4	2427	16.38	30.00	0.42	16.80	36.00	Pass
VHT40	MCS0	1	5	2432	19.10	30.00	0.42	19.52	36.00	Pass
VHT40	MCS0	1	6	2437	20.30	30.00	0.42	20.72	36.00	Pass
VHT40	MCS0	1	8	2447	17.36	30.00	0.42	17.78	36.00	Pass
VHT40	MCS0	1	9	2452	15.78	30.00	0.42	16.20	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	13.95	9.28	0.50	Pass
11b	1Mbps	1	6	2437	14.01	9.32	0.50	Pass
11b	1Mbps	1	11	2462	13.98	9.32	0.50	Pass
11g	6Mbps	1	1	2412	16.76	16.48	0.50	Pass
11g	6Mbps	1	6	2437	16.79	16.54	0.50	Pass
11g	6Mbps	1	11	2462	16.77	16.46	0.50	Pass
HT20	MCS0	1	1	2412	17.92	17.64	0.50	Pass
HT20	MCS0	1	6	2437	17.98	17.60	0.50	Pass
HT20	MCS0	1	11	2462	17.95	17.62	0.50	Pass
HT40	MCS0	1	3	2422	36.52	36.16	0.50	Pass
HT40	MCS0	1	6	2437	36.58	36.32	0.50	Pass
HT40	MCS0	1	9	2452	36.47	35.88	0.50	Pass


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-4.70	0.42	8.00	Pass
11b	1Mbps	1	6	2437	-4.44	0.42	8.00	Pass
11b	1Mbps	1	11	2462	-4.69	0.42	8.00	Pass
11g	6Mbps	1	1	2412	-8.20	0.42	8.00	Pass
11g	6Mbps	1	6	2437	-8.37	0.42	8.00	Pass
11g	6Mbps	1	11	2462	-7.82	0.42	8.00	Pass
HT20	MCS0	1	1	2412	-9.59	0.42	8.00	Pass
HT20	MCS0	1	6	2437	-9.52	0.42	8.00	Pass
HT20	MCS0	1	11	2462	-9.87	0.42	8.00	Pass
HT40	MCS0	1	3	2422	-12.06	0.42	8.00	Pass
HT40	MCS0	1	6	2437	-11.68	0.42	8.00	Pass
HT40	MCS0	1	9	2452	-12.00	0.42	8.00	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

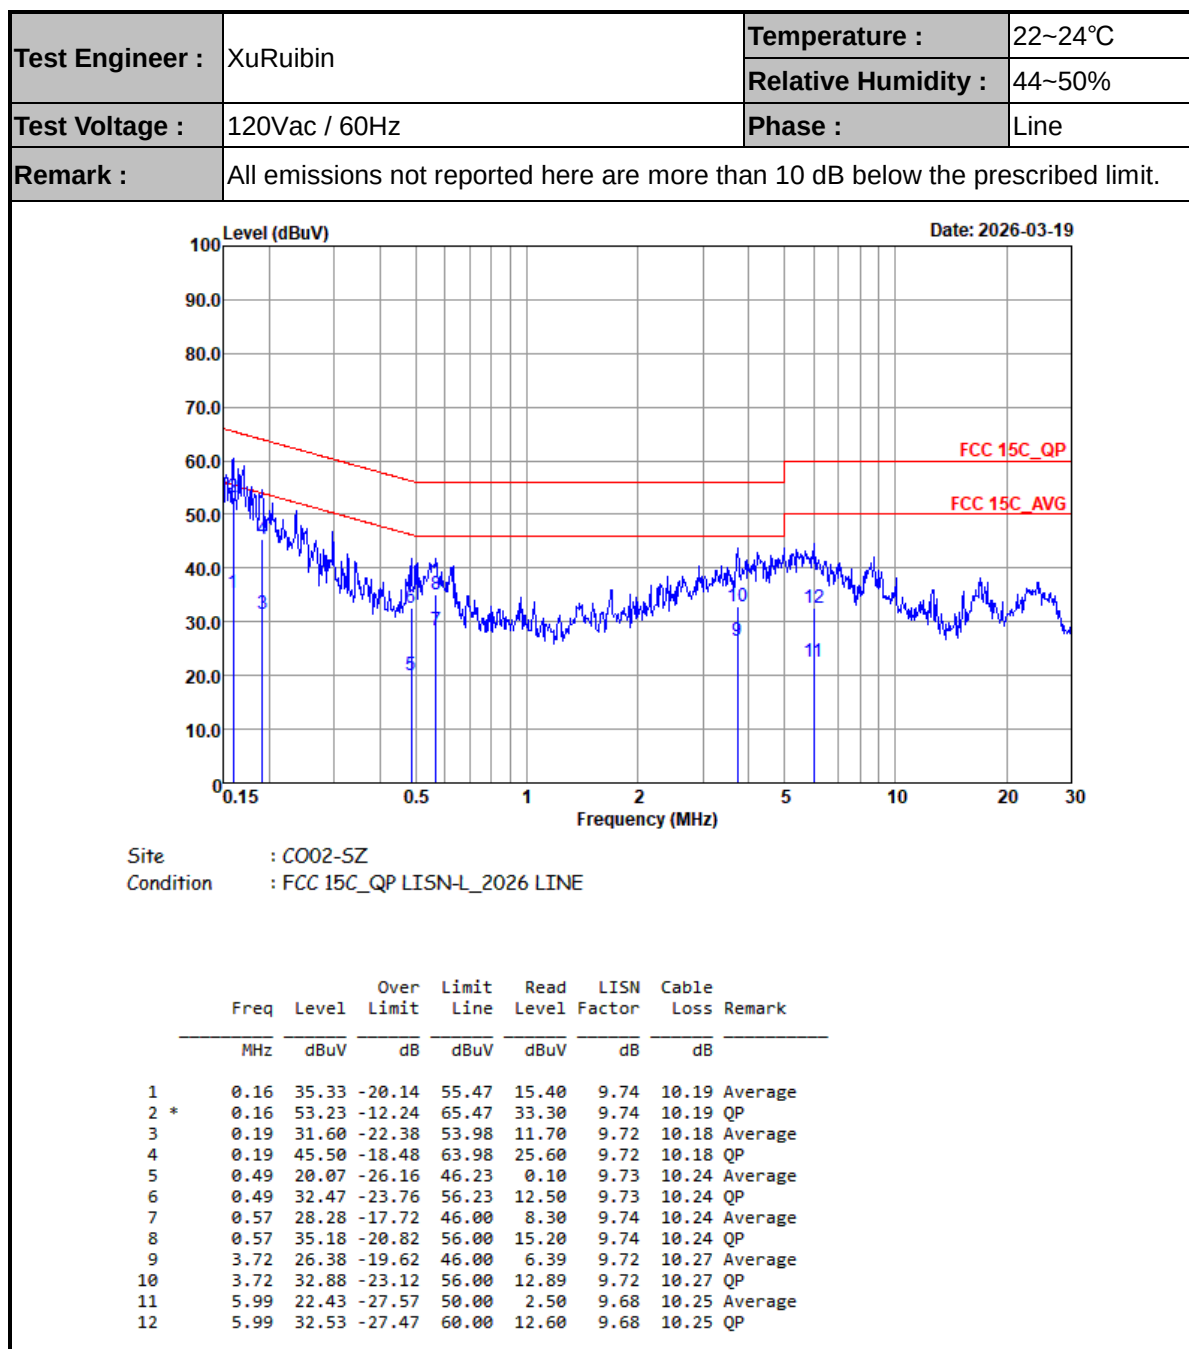



Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

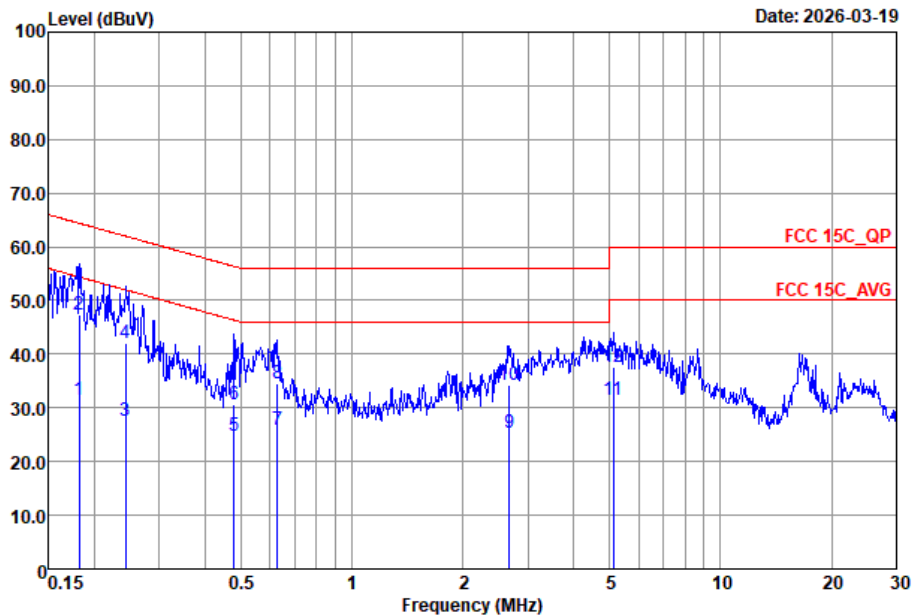

Site : CO02-SZ
Condition : FCC 15C_QP LISN-N_2026 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	31.46	-22.91	54.37	11.50	9.78	10.18	Average
2 *	0.18	47.26	-17.11	64.37	27.30	9.78	10.18	QP
3	0.24	27.47	-24.53	52.00	7.50	9.78	10.19	Average
4	0.24	42.07	-19.93	62.00	22.10	9.78	10.19	QP
5	0.48	24.86	-21.50	46.36	4.90	9.72	10.24	Average
6	0.48	30.56	-25.80	56.36	10.60	9.72	10.24	QP
7	0.63	26.01	-19.99	46.00	6.00	9.77	10.24	Average
8	0.63	34.41	-21.59	56.00	14.40	9.77	10.24	QP
9	2.68	25.43	-20.57	46.00	5.40	9.77	10.26	Average
10	2.68	34.13	-21.87	56.00	14.10	9.77	10.26	QP
11	5.11	31.53	-18.47	50.00	11.50	9.76	10.27	Average
12	5.11	37.73	-22.27	60.00	17.70	9.76	10.27	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	SISO	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	SISO	802.11n HT40	06	2437	MCS0	-	-
Mode 12	2400-2483.5	SISO	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	SISO	802.11g-LF	11	2462	6Mbps	-	-
Mode 14	2400-2483.5	SISO	802.11n HT40	06	2437	MCS0	-	-
Mode 15	2400-2483.5	SISO	802.11n HT40	04	2427	MCS0	-	-
Mode 16	2400-2483.5	SISO	802.11n HT40	05	2432	MCS0	-	-
Mode 17	2400-2483.5	SISO	802.11n HT40	08	2447	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2386.44	42.02	54.00	-11.98	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	47.03	54.00	-6.97	V	Average	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	47.69	54.00	-6.31	V	Average	Pass	Harmonic
3	802.11b	11	2483.51	41.95	54.00	-12.05	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	47.43	54.00	-6.57	V	Average	Pass	Harmonic
4	802.11g	01	2389.95	46.55	54.00	-7.45	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	46.10	74.00	-27.90	V	Peak	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	41.47	54.00	-12.53	V	Average	Pass	Harmonic
6	802.11g	11	2483.51	47.76	54.00	-6.24	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	46.97	74.00	-27.03	V	Peak	Pass	Harmonic
7	802.11n HT20	01	2389.69	45.95	54.00	-8.05	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	45.82	74.00	-28.18	H	Peak	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	42.81	54.00	-11.19	V	Average	Pass	Harmonic
9	802.11n HT20	11	2483.51	47.67	54.00	-6.33	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	46.35	74.00	-27.65	V	Peak	Pass	Harmonic
10	802.11n HT40	03	2389.52	46.64	54.00	-7.36	H	AVERAGE	Pass	Band Edge







10	802.11n HT40	03	7266.00	47.05	74.00	-26.95	V	Peak	Pass	Harmonic
11	802.11n HT40	06	-	-	-	-	-	-	-	Band Edge
11	802.11n HT40	06	7311.00	43.78	54.00	-10.22	V	Average	Pass	Harmonic
12	802.11n HT40	09	2484.40	46.71	54.00	-7.29	H	AVERAGE	Pass	Band Edge
12	802.11n HT40	09	7356.00	46.78	74.00	-27.22	V	Peak	Pass	Harmonic
13	802.11g-LF	11	441.28	39.83	46.00	-6.17	H	Peak	Pass	LF
14	802.11n HT40	06	2389.88	45.87	54.00	-8.13	H	AVERAGE	Pass	Band Edge
14	802.11n HT40	06	-	-	-	-	-	-	-	Harmonic
15	802.11n HT40	04	2389.30	47.32	54.00	-6.68	H	AVERAGE	Pass	Band Edge
15	802.11n HT40	04	-	-	-	-	-	-	-	Harmonic
16	802.11n HT40	05	2389.63	47.41	54.00	-6.59	H	AVERAGE	Pass	Band Edge
16	802.11n HT40	05	-	-	-	-	-	-	-	Harmonic
17	802.11n HT40	08	2484.54	47.55	54.00	-6.45	H	AVERAGE	Pass	Band Edge
17	802.11n HT40	08	-	-	-	-	-	-	-	Harmonic

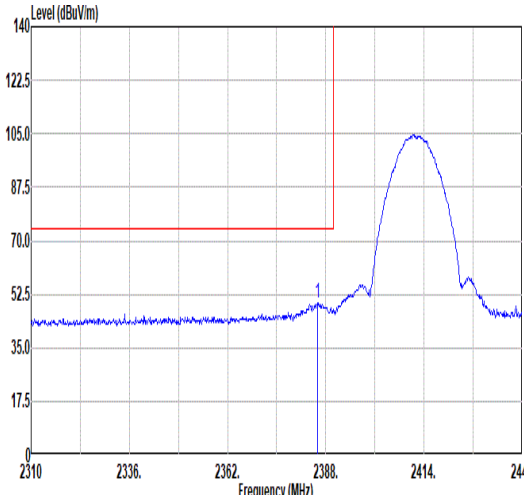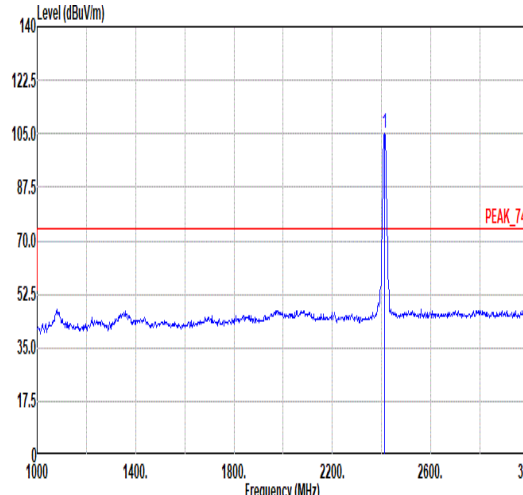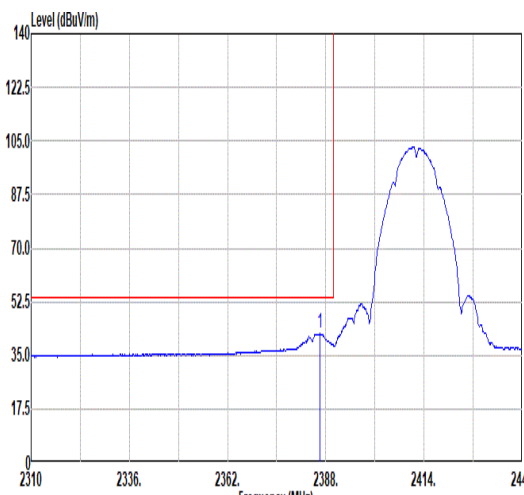
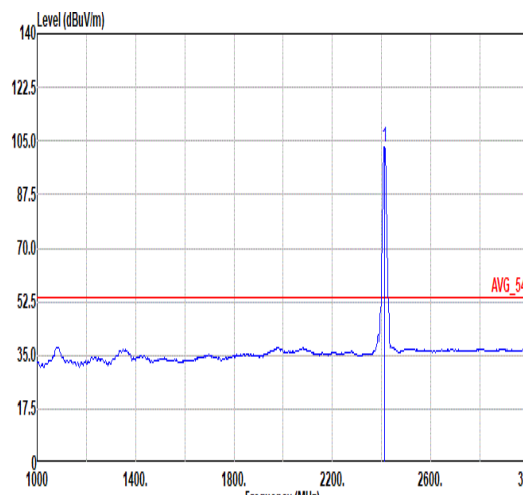


		1																																																																																						
Mode		Band Edge																																																																																						
		2400-2483.5_802.11b_CH01_2412MHz																																																																																						
ANT		SISO																																																																																						
Pol.		Horizontal					Fundamental																																																																																	
Peak																																																																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2385.92	49.53	74.00	-24.47	44.91	30.41	6.86	32.65	400	65	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>105.36</td><td>-----</td><td>-----</td><td>100.68</td><td>30.43</td><td>6.89</td><td>32.64</td><td>400</td><td>65</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	105.36	-----	-----	100.68	30.43	6.89	32.64	400	65
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2385.92	49.53	74.00	-24.47	44.91	30.41	6.86	32.65	400	65	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	105.36	-----	-----	100.68	30.43	6.89	32.64	400	65	PEAK																																																																													
Avg																																																																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2386.44	42.02	54.00	-11.98	37.40	30.41	6.86	32.65	400	65	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>102.92</td><td>-----</td><td>-----</td><td>98.24</td><td>30.43</td><td>6.89</td><td>32.64</td><td>400</td><td>65</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	102.92	-----	-----	98.24	30.43	6.89	32.64	400	65
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2386.44	42.02	54.00	-11.98	37.40	30.41	6.86	32.65	400	65	AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	102.92	-----	-----	98.24	30.43	6.89	32.64	400	65	AVERAGE																																																																													

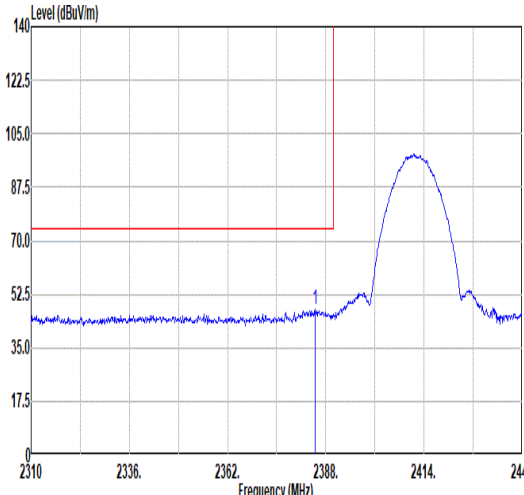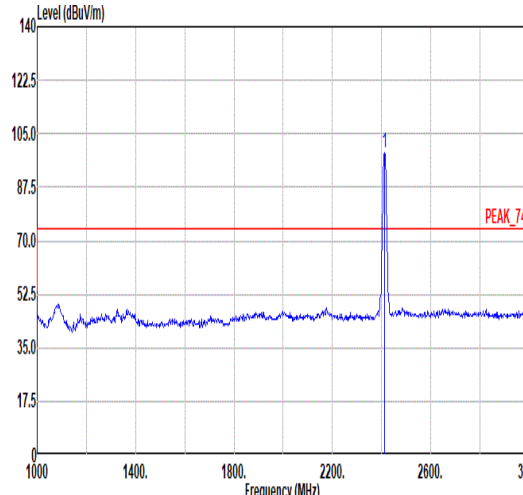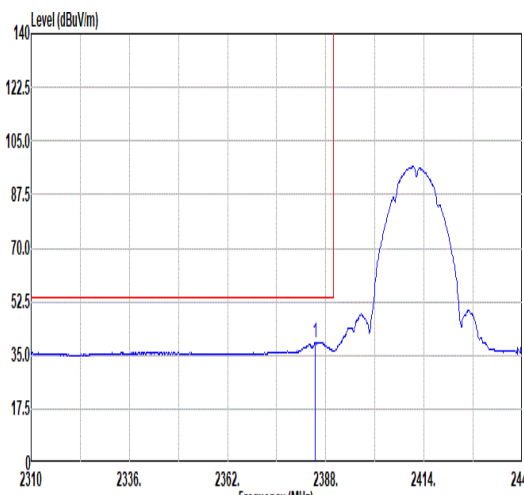
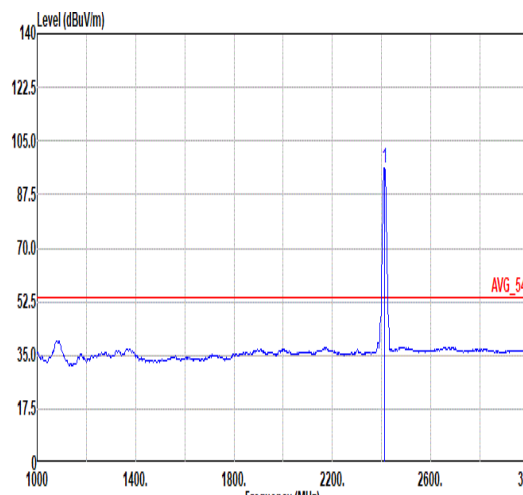


Mode	1																																																																																													
	Band Edge																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2385.14</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>42.75</td><td>30.41</td><td>6.86</td><td>32.65</td><td>348</td><td>129</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2385.14	47.37	74.00	-26.63	42.75	30.41	6.86	32.65	348	129	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>98.94</td><td>-----</td><td>-----</td><td>94.26</td><td>30.43</td><td>6.89</td><td>32.64</td><td>348</td><td>129</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	98.94	-----	-----	94.26	30.43	6.89	32.64	348	129
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2385.14	47.37	74.00	-26.63	42.75	30.41	6.86	32.65	348	129	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	98.94	-----	-----	94.26	30.43	6.89	32.64	348	129	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2385.14</td><td>39.26</td><td>54.00</td><td>-14.74</td><td>34.64</td><td>30.41</td><td>6.86</td><td>32.65</td><td>348</td><td>129</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2385.14	39.26	54.00	-14.74	34.64	30.41	6.86	32.65	348	129	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>96.34</td><td>-----</td><td>-----</td><td>91.66</td><td>30.43</td><td>6.89</td><td>32.64</td><td>348</td><td>129</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	96.34	-----	-----	91.66	30.43	6.89	32.64	348	129
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2385.14	39.26	54.00	-14.74	34.64	30.41	6.86	32.65	348	129	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	96.34	-----	-----	91.66	30.43	6.89	32.64	348	129	AVERAGE																																																																																			



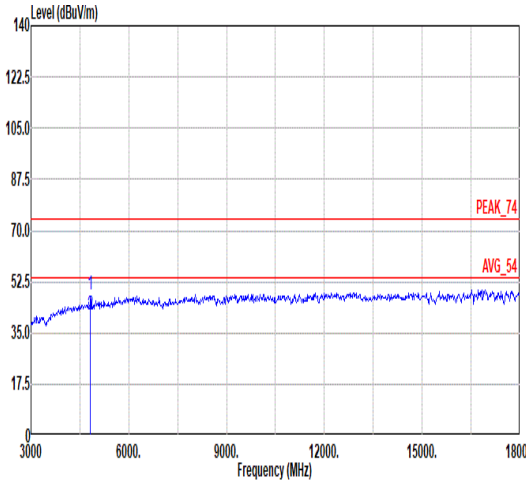
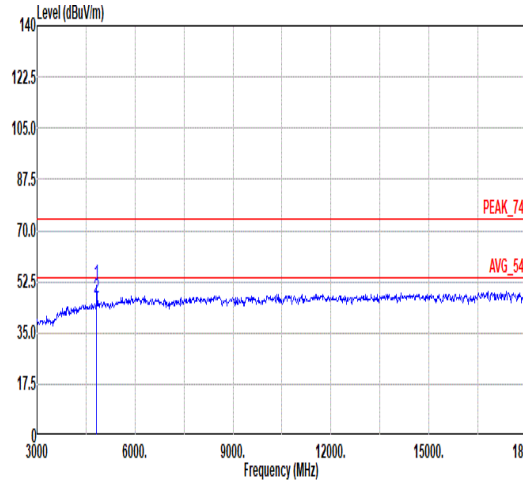


Mode	1																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																						
ANT	SISO																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>48.31</td><td>74.00</td><td>-25.69</td><td>55.33</td><td>35.41</td><td>10.16</td><td>52.59</td><td>102</td><td>220</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>48.33</td><td>35.41</td><td>10.16</td><td>52.59</td><td>102</td><td>220</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	48.31	74.00	-25.69	55.33	35.41	10.16	52.59	102	220	Peak	2	4824.00	41.31	54.00	-12.69	48.33	35.41	10.16	52.59	102	220	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>51.83</td><td>74.00</td><td>-22.17</td><td>58.85</td><td>35.41</td><td>10.16</td><td>52.59</td><td>185</td><td>311</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>47.03</td><td>54.00</td><td>-6.97</td><td>54.05</td><td>35.41</td><td>10.16</td><td>52.59</td><td>185</td><td>311</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	51.83	74.00	-22.17	58.85	35.41	10.16	52.59	185	311	Peak	2	4824.00	47.03	54.00	-6.97	54.05	35.41	10.16	52.59	185	311	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4824.00	48.31	74.00	-25.69	55.33	35.41	10.16	52.59	102	220	Peak																																																																																																												
2	4824.00	41.31	54.00	-12.69	48.33	35.41	10.16	52.59	102	220	Average																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4824.00	51.83	74.00	-22.17	58.85	35.41	10.16	52.59	185	311	Peak																																																																																																												
2	4824.00	47.03	54.00	-6.97	54.05	35.41	10.16	52.59	185	311	Average																																																																																																												



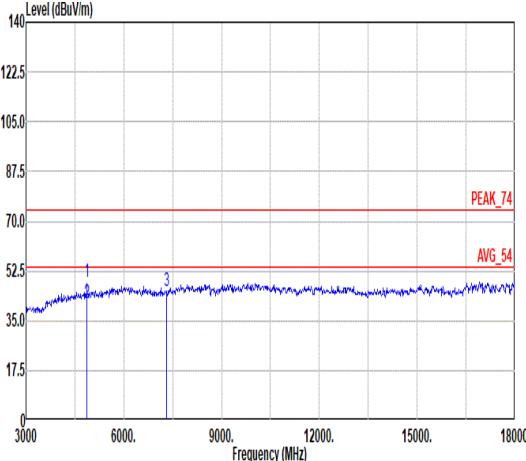
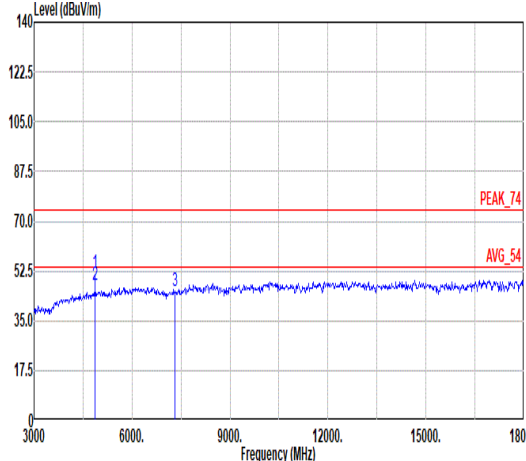


Mode	2																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																															
ANT	SISO																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																									
Peak Avg																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>48.41</td><td>74.00</td><td>-25.59</td><td>55.24</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>221</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>48.13</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>221</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.53</td><td>74.00</td><td>-28.47</td><td>49.27</td><td>36.47</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	48.41	74.00	-25.59	55.24	35.52	10.27	52.62	100	221	Peak	2	4874.00	41.30	54.00	-12.70	48.13	35.52	10.27	52.62	100	221	Average	3	7311.00	45.53	74.00	-28.47	49.27	36.47	12.01	52.22	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>58.86</td><td>35.52</td><td>10.27</td><td>52.62</td><td>182</td><td>311</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>47.69</td><td>54.00</td><td>-6.31</td><td>54.52</td><td>35.52</td><td>10.27</td><td>52.62</td><td>182</td><td>311</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.48</td><td>74.00</td><td>-28.52</td><td>49.22</td><td>36.47</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	52.03	74.00	-21.97	58.86	35.52	10.27	52.62	182	311	Peak	2	4874.00	47.69	54.00	-6.31	54.52	35.52	10.27	52.62	182	311	Average	3	7311.00	45.48	74.00	-28.52	49.22	36.47	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4874.00	48.41	74.00	-25.59	55.24	35.52	10.27	52.62	100	221	Peak																																																																																																																																					
2	4874.00	41.30	54.00	-12.70	48.13	35.52	10.27	52.62	100	221	Average																																																																																																																																					
3	7311.00	45.53	74.00	-28.47	49.27	36.47	12.01	52.22	---	---	Peak																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4874.00	52.03	74.00	-21.97	58.86	35.52	10.27	52.62	182	311	Peak																																																																																																																																					
2	4874.00	47.69	54.00	-6.31	54.52	35.52	10.27	52.62	182	311	Average																																																																																																																																					
3	7311.00	45.48	74.00	-28.52	49.22	36.47	12.01	52.22	---	---	Peak																																																																																																																																					

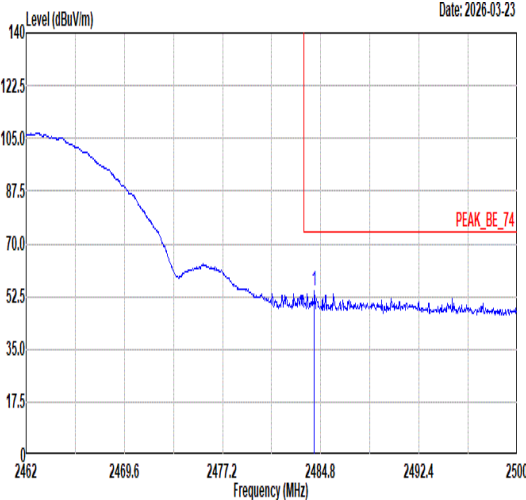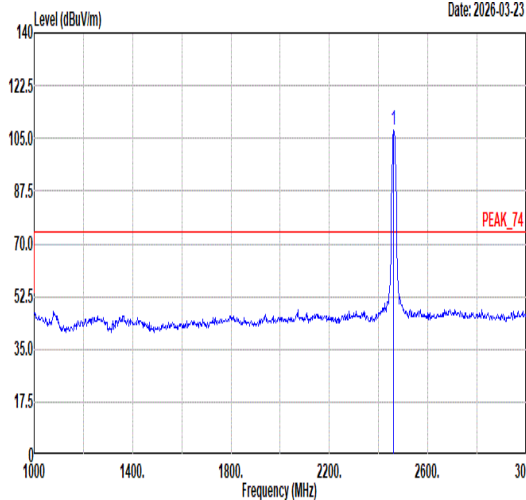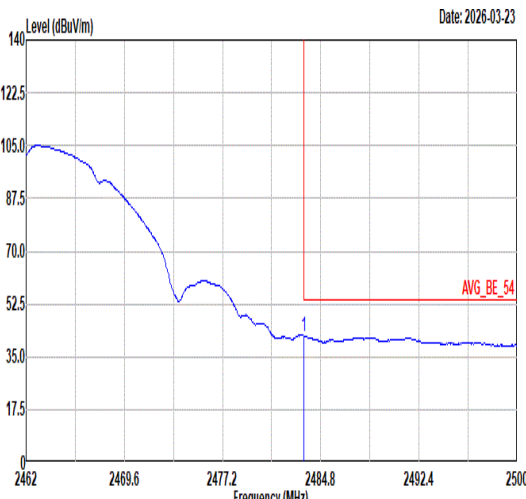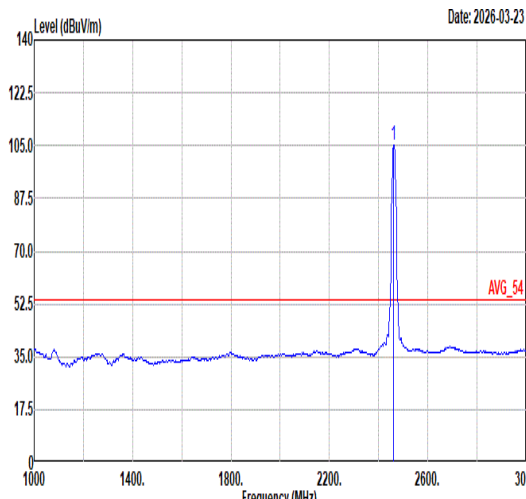

	3																																																																																														
Mode	Band Edge																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.31</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>49.67</td><td>30.49</td><td>6.98</td><td>32.61</td><td>264</td><td>64</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.31	54.53	74.00	-19.47	49.67	30.49	6.98	32.61	264	64	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.74</td><td>-----</td><td>-----</td><td>102.94</td><td>30.47</td><td>6.95</td><td>32.62</td><td>264</td><td>64</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.74	-----	-----	102.94	30.47	6.95	32.62	264	64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2484.31	54.53	74.00	-19.47	49.67	30.49	6.98	32.61	264	64	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	107.74	-----	-----	102.94	30.47	6.95	32.62	264	64	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>41.95</td><td>54.00</td><td>-12.05</td><td>37.09</td><td>30.49</td><td>6.98</td><td>32.61</td><td>264</td><td>64</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	41.95	54.00	-12.05	37.09	30.49	6.98	32.61	264	64	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.19</td><td>-----</td><td>-----</td><td>100.39</td><td>30.47</td><td>6.95</td><td>32.62</td><td>264</td><td>64</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.19	-----	-----	100.39	30.47	6.95	32.62	264	64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.51	41.95	54.00	-12.05	37.09	30.49	6.98	32.61	264	64	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	105.19	-----	-----	100.39	30.47	6.95	32.62	264	64	AVERAGE																																																																																				

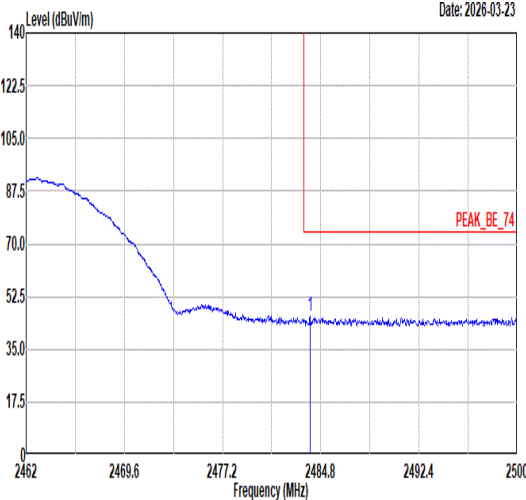
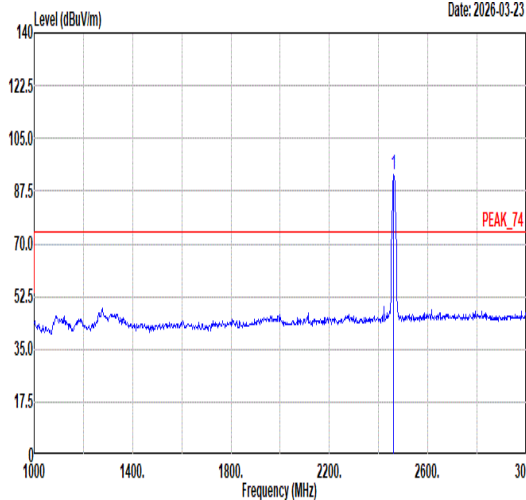
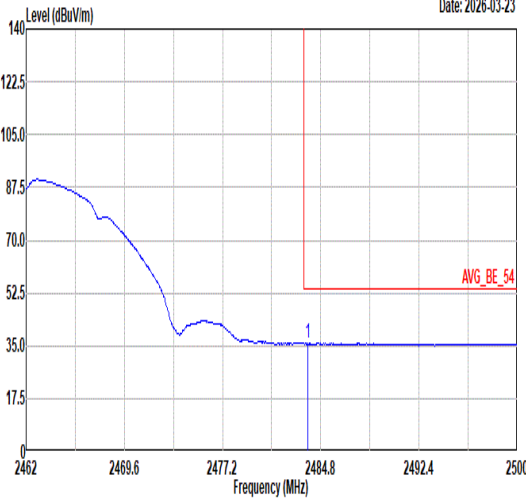
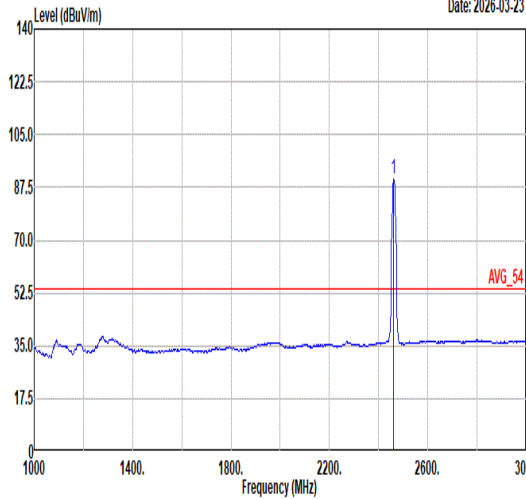


Mode	3																																									
	Band Edge																																									
	2400-2483.5_802.11b_CH11_2462MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2026-03-23  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.96</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>41.08</td><td>30.49</td><td>6.98</td><td>32.61</td><td>264</td><td>65 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2483.96	45.94	74.00	-28.06	41.08	30.49	6.98	32.61	264	65 PEAK	Level (dBuV/m) Date: 2026-03-23  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2462.00</td><td>92.84</td><td>-----</td><td>-----</td><td>88.04</td><td>30.47</td><td>6.95</td><td>32.62</td><td>264</td><td>65 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2462.00	92.84	-----	-----	88.04	30.47	6.95	32.62	264	65 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2483.96	45.94	74.00	-28.06	41.08	30.49	6.98	32.61	264	65 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2462.00	92.84	-----	-----	88.04	30.47	6.95	32.62	264	65 PEAK																																	
Avg	Level (dBuV/m) Date: 2026-03-23  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.77</td><td>35.91</td><td>54.00</td><td>-18.09</td><td>31.05</td><td>30.49</td><td>6.98</td><td>32.61</td><td>264</td><td>65 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2483.77	35.91	54.00	-18.09	31.05	30.49	6.98	32.61	264	65 AVERAGE	Level (dBuV/m) Date: 2026-03-23  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2462.00</td><td>90.18</td><td>-----</td><td>-----</td><td>85.38</td><td>30.47</td><td>6.95</td><td>32.62</td><td>264</td><td>65 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2462.00	90.18	-----	-----	85.38	30.47	6.95	32.62	264	65 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2483.77	35.91	54.00	-18.09	31.05	30.49	6.98	32.61	264	65 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2462.00	90.18	-----	-----	85.38	30.47	6.95	32.62	264	65 AVERAGE																																	







Mode	3																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																														
ANT	SISO																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>48.27</td><td>74.00</td><td>-25.73</td><td>54.97</td><td>35.63</td><td>10.32</td><td>52.65</td><td>105</td><td>220</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>41.20</td><td>54.00</td><td>-12.80</td><td>47.90</td><td>35.63</td><td>10.32</td><td>52.65</td><td>105</td><td>220</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>49.71</td><td>36.56</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	48.27	74.00	-25.73	54.97	35.63	10.32	52.65	105	220	Peak	2	4924.00	41.20	54.00	-12.80	47.90	35.63	10.32	52.65	105	220	Average	3	7386.00	46.00	74.00	-28.00	49.71	36.56	11.98	52.25	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>51.73</td><td>74.00</td><td>-22.27</td><td>58.43</td><td>35.63</td><td>10.32</td><td>52.65</td><td>180</td><td>311</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>47.43</td><td>54.00</td><td>-6.57</td><td>54.13</td><td>35.63</td><td>10.32</td><td>52.65</td><td>180</td><td>311</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>45.64</td><td>74.00</td><td>-28.36</td><td>49.35</td><td>36.56</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	51.73	74.00	-22.27	58.43	35.63	10.32	52.65	180	311	Peak	2	4924.00	47.43	54.00	-6.57	54.13	35.63	10.32	52.65	180	311	Average	3	7386.00	45.64	74.00	-28.36	49.35	36.56	11.98	52.25	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	48.27	74.00	-25.73	54.97	35.63	10.32	52.65	105	220	Peak																																																																																																																																				
2	4924.00	41.20	54.00	-12.80	47.90	35.63	10.32	52.65	105	220	Average																																																																																																																																				
3	7386.00	46.00	74.00	-28.00	49.71	36.56	11.98	52.25	---	---	Peak																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	51.73	74.00	-22.27	58.43	35.63	10.32	52.65	180	311	Peak																																																																																																																																				
2	4924.00	47.43	54.00	-6.57	54.13	35.63	10.32	52.65	180	311	Average																																																																																																																																				
3	7386.00	45.64	74.00	-28.36	49.35	36.56	11.98	52.25	---	---	Peak																																																																																																																																				

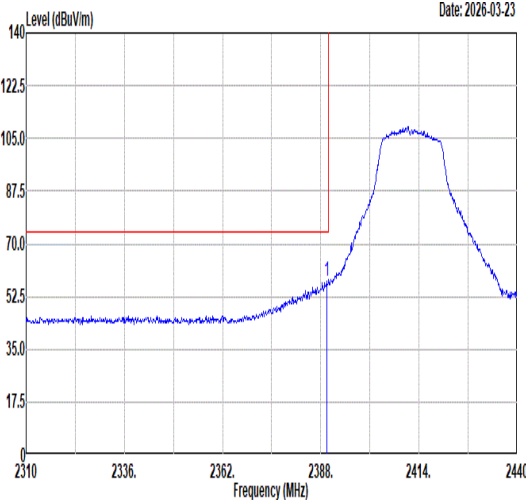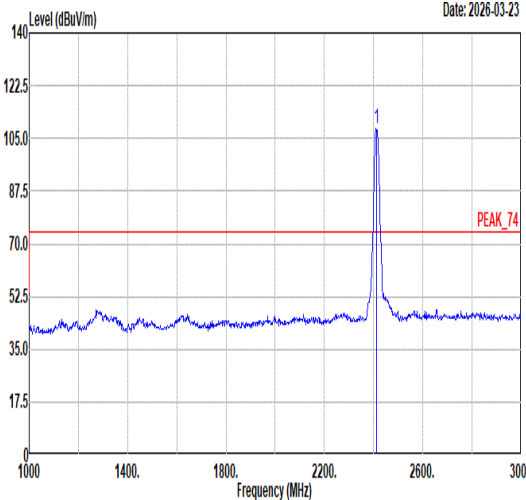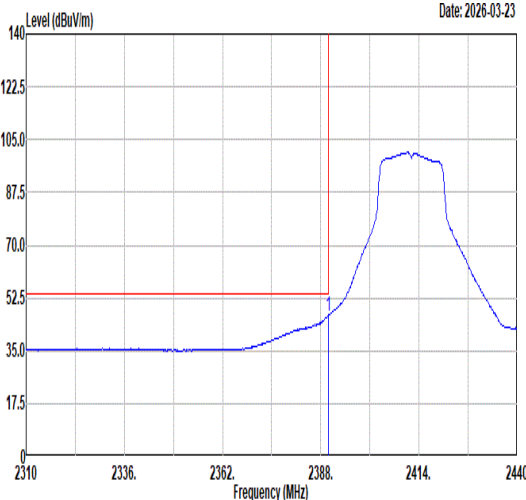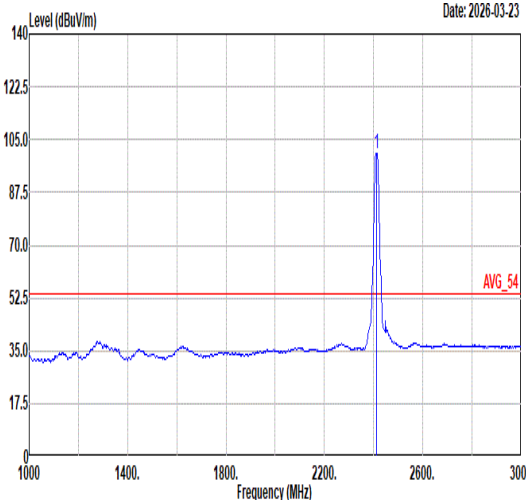

Mode	4																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11g_CH01_2412MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>57.36</td><td>74.00</td><td>-16.64</td><td>52.72</td><td>30.41</td><td>6.87</td><td>32.64</td><td>347 87 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	57.36	74.00	-16.64	52.72	30.41	6.87	32.64	347 87 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.22</td><td>-----</td><td>-----</td><td>103.54</td><td>30.43</td><td>6.89</td><td>32.64</td><td>347 87 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.22	-----	-----	103.54	30.43	6.89	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.69	57.36	74.00	-16.64	52.72	30.41	6.87	32.64	347 87 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	108.22	-----	-----	103.54	30.43	6.89	32.64	347 87 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.55</td><td>54.00</td><td>-7.45</td><td>41.91</td><td>30.41</td><td>6.87</td><td>32.64</td><td>347 87 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.55	54.00	-7.45	41.91	30.41	6.87	32.64	347 87 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.62</td><td>-----</td><td>-----</td><td>95.94</td><td>30.43</td><td>6.89</td><td>32.64</td><td>347 87 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.62	-----	-----	95.94	30.43	6.89	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	46.55	54.00	-7.45	41.91	30.41	6.87	32.64	347 87 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	100.62	-----	-----	95.94	30.43	6.89	32.64	347 87 AVERAGE																																																																																

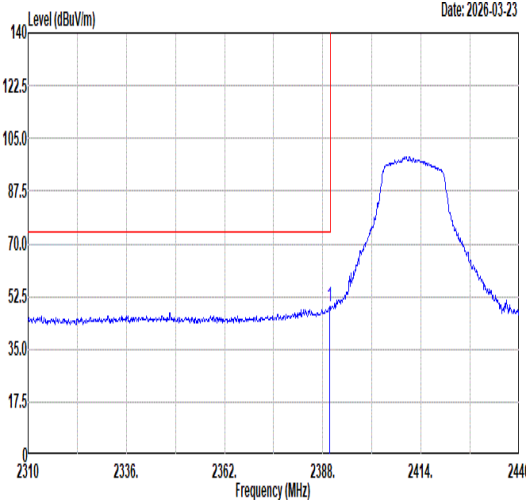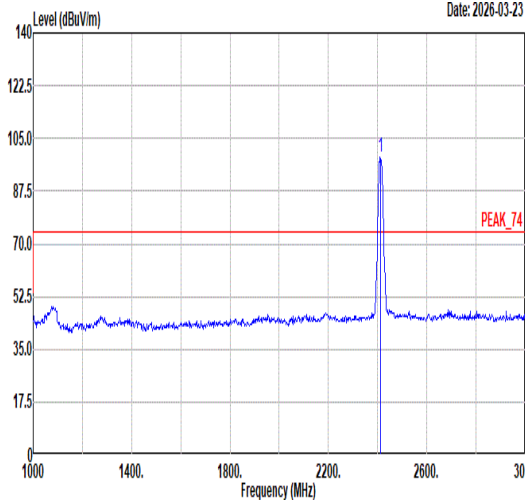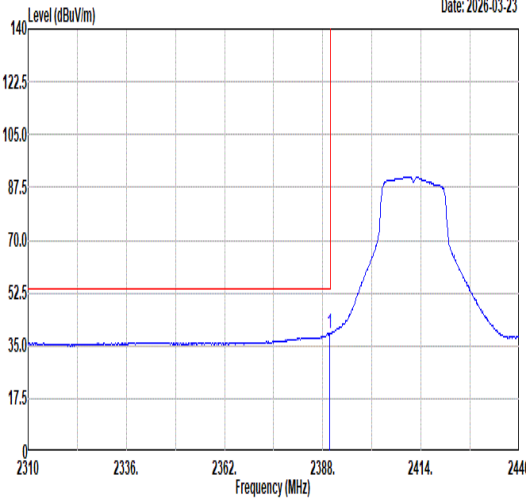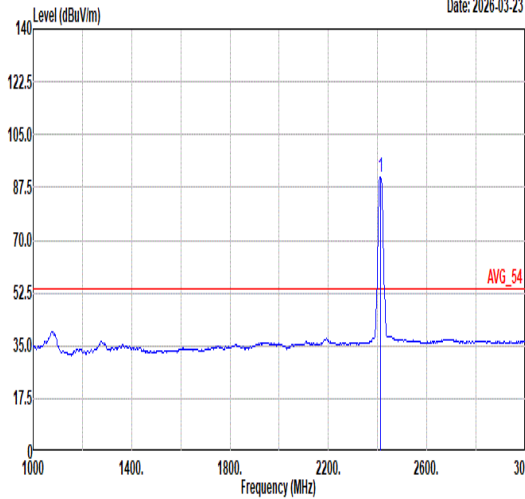

Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-03-23  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>44.49</td><td>30.41</td><td>6.87</td><td>32.64</td><td>273 131 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	49.13	74.00	-24.87	44.49	30.41	6.87	32.64	273 131 PEAK	Level (dBuV/m) Date: 2026-03-23  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.62</td><td>-----</td><td>-----</td><td>93.94</td><td>30.43</td><td>6.89</td><td>32.64</td><td>273 131 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.62	-----	-----	93.94	30.43	6.89	32.64	273 131 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.82	49.13	74.00	-24.87	44.49	30.41	6.87	32.64	273 131 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	98.62	-----	-----	93.94	30.43	6.89	32.64	273 131 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2026-03-23  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>39.29</td><td>54.00</td><td>-14.71</td><td>34.65</td><td>30.41</td><td>6.87</td><td>32.64</td><td>273 131 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	39.29	54.00	-14.71	34.65	30.41	6.87	32.64	273 131 AVERAGE	Level (dBuV/m) Date: 2026-03-23  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>90.88</td><td>-----</td><td>-----</td><td>86.20</td><td>30.43</td><td>6.89</td><td>32.64</td><td>273 131 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	90.88	-----	-----	86.20	30.43	6.89	32.64	273 131 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.82	39.29	54.00	-14.71	34.65	30.41	6.87	32.64	273 131 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	90.88	-----	-----	86.20	30.43	6.89	32.64	273 131 AVERAGE																																																																									



Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>50.52</td><td>35.41</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.50	74.00	-30.50	50.52	35.41	10.16	52.59	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.10</td><td>74.00</td><td>-27.90</td><td>53.12</td><td>35.41</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.10	74.00	-27.90	53.12	35.41	10.16	52.59	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4824.00	43.50	74.00	-30.50	50.52	35.41	10.16	52.59	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4824.00	46.10	74.00	-27.90	53.12	35.41	10.16	52.59	---	---	Peak																																																																																	







Mode	5																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																	
ANT	SISO																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																											
Peak Avg																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>46.14</td><td>74.00</td><td>-27.86</td><td>52.97</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>200</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>35.72</td><td>54.00</td><td>-18.28</td><td>42.55</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>200</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>51.55</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>200</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>39.23</td><td>54.00</td><td>-14.77</td><td>42.97</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>200</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	46.14	74.00	-27.86	52.97	35.52	10.27	52.62	100	200	Peak	2	4874.00	35.72	54.00	-18.28	42.55	35.52	10.27	52.62	100	200	Average	3	7311.00	47.81	74.00	-26.19	51.55	36.47	12.01	52.22	100	200	Peak	4	7311.00	39.23	54.00	-14.77	42.97	36.47	12.01	52.22	100	200	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>57.75</td><td>35.52</td><td>10.27</td><td>52.62</td><td>150</td><td>242</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>41.03</td><td>54.00</td><td>-12.97</td><td>47.86</td><td>35.52</td><td>10.27</td><td>52.62</td><td>150</td><td>242</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>52.45</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>330</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>45.21</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>330</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	50.92	74.00	-23.08	57.75	35.52	10.27	52.62	150	242	Peak	2	4874.00	41.03	54.00	-12.97	47.86	35.52	10.27	52.62	150	242	Average	3	7311.00	48.71	74.00	-25.29	52.45	36.47	12.01	52.22	100	330	Peak	4	7311.00	41.47	54.00	-12.53	45.21	36.47	12.01	52.22	100	330
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																									
1	4874.00	46.14	74.00	-27.86	52.97	35.52	10.27	52.62	100	200	Peak																																																																																																																																																							
2	4874.00	35.72	54.00	-18.28	42.55	35.52	10.27	52.62	100	200	Average																																																																																																																																																							
3	7311.00	47.81	74.00	-26.19	51.55	36.47	12.01	52.22	100	200	Peak																																																																																																																																																							
4	7311.00	39.23	54.00	-14.77	42.97	36.47	12.01	52.22	100	200	Average																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																									
1	4874.00	50.92	74.00	-23.08	57.75	35.52	10.27	52.62	150	242	Peak																																																																																																																																																							
2	4874.00	41.03	54.00	-12.97	47.86	35.52	10.27	52.62	150	242	Average																																																																																																																																																							
3	7311.00	48.71	74.00	-25.29	52.45	36.47	12.01	52.22	100	330	Peak																																																																																																																																																							
4	7311.00	41.47	54.00	-12.53	45.21	36.47	12.01	52.22	100	330	Average																																																																																																																																																							





Mode	6																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																													
ANT	SISO																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-03-23 PEAK_BE_74 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.85</td><td>60.00</td><td>74.00</td><td>-14.00</td><td>55.14</td><td>30.49</td><td>6.98</td><td>32.61</td><td>329</td><td>75 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.85	60.00	74.00	-14.00	55.14	30.49	6.98	32.61	329	75 PEAK	Level (dBuV/m) Date: 2026-03-23 PEAK_74 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>106.45</td><td>-----</td><td>-----</td><td>101.65</td><td>30.47</td><td>6.95</td><td>32.62</td><td>329</td><td>75 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	106.45	-----	-----	101.65	30.47	6.95	32.62	329	75 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.85	60.00	74.00	-14.00	55.14	30.49	6.98	32.61	329	75 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	106.45	-----	-----	101.65	30.47	6.95	32.62	329	75 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2026-03-23 AVG_BE_54 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>47.76</td><td>54.00</td><td>-6.24</td><td>42.90</td><td>30.49</td><td>6.98</td><td>32.61</td><td>329</td><td>75 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	47.76	54.00	-6.24	42.90	30.49	6.98	32.61	329	75 AVERAGE	Level (dBuV/m) Date: 2026-03-23 AVG_54 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.41</td><td>-----</td><td>-----</td><td>94.61</td><td>30.47</td><td>6.95</td><td>32.62</td><td>329</td><td>75 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	99.41	-----	-----	94.61	30.47	6.95	32.62	329	75 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.51	47.76	54.00	-6.24	42.90	30.49	6.98	32.61	329	75 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	99.41	-----	-----	94.61	30.47	6.95	32.62	329	75 AVERAGE																																																																					

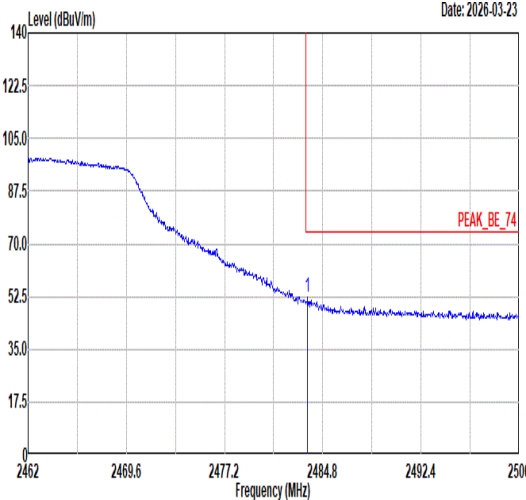
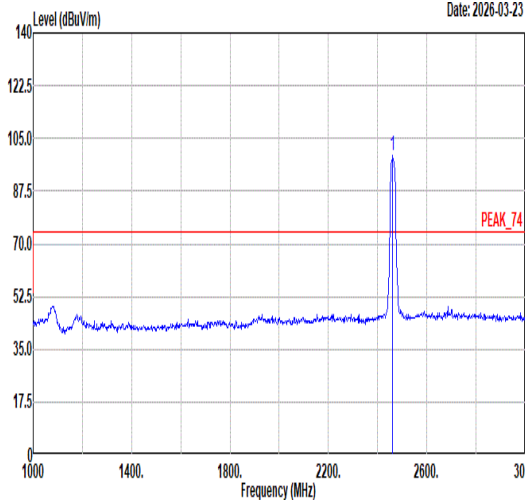
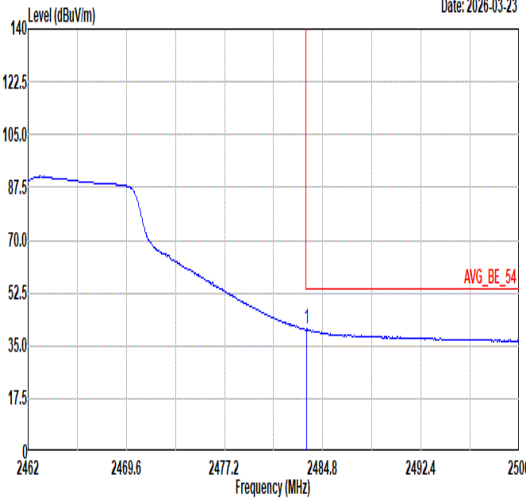
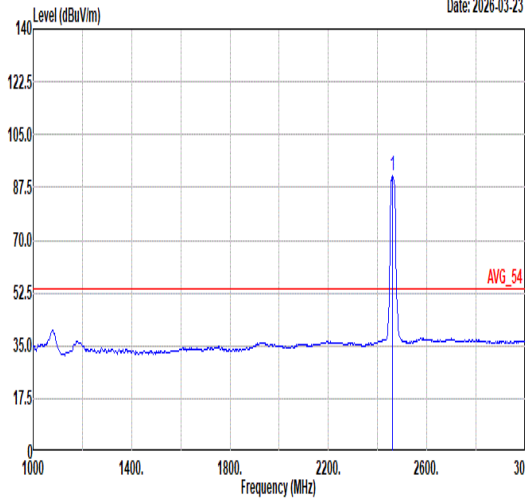


		6																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_802.11g_CH11_2462MHz																																																																																										
ANT		SISO																																																																																										
Pol.	Vertical										Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2026-03-23  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.62</td><td>52.25</td><td>74.00</td><td>-21.75</td><td>47.39</td><td>30.49</td><td>6.98</td><td>32.61</td><td>292 121 PEAK</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.62	52.25	74.00	-21.75	47.39	30.49	6.98	32.61	292 121 PEAK	Level (dBuV/m) Date: 2026-03-23  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>99.19</td><td>-----</td><td>-----</td><td>94.39</td><td>30.47</td><td>6.95</td><td>32.62</td><td>292 121 PEAK</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	99.19	-----	-----	94.39	30.47	6.95	32.62	292 121 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 2483.62	52.25	74.00	-21.75	47.39	30.49	6.98	32.61	292 121 PEAK																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 2462.00	99.19	-----	-----	94.39	30.47	6.95	32.62	292 121 PEAK																																																																																				
Avg	Level (dBuV/m) Date: 2026-03-23  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.55</td><td>40.44</td><td>54.00</td><td>-13.56</td><td>35.58</td><td>30.49</td><td>6.98</td><td>32.61</td><td>292 121 AVERAGE</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.55	40.44	54.00	-13.56	35.58	30.49	6.98	32.61	292 121 AVERAGE	Level (dBuV/m) Date: 2026-03-23  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>91.33</td><td>-----</td><td>-----</td><td>86.53</td><td>30.47</td><td>6.95</td><td>32.62</td><td>292 121 AVERAGE</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	91.33	-----	-----	86.53	30.47	6.95	32.62	292 121 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 2483.55	40.44	54.00	-13.56	35.58	30.49	6.98	32.61	292 121 AVERAGE																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 2462.00	91.33	-----	-----	86.53	30.47	6.95	32.62	292 121 AVERAGE																																																																																				



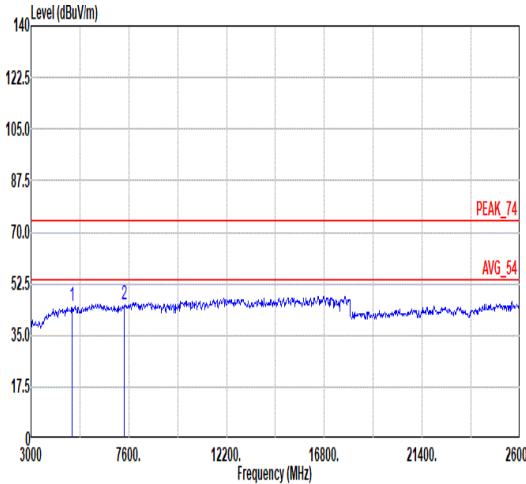
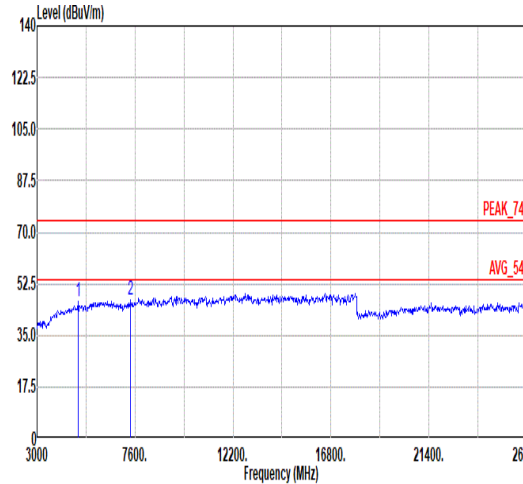




Mode	6																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																			
ANT	SISO																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.78</td><td>74.00</td><td>-29.22</td><td>51.48</td><td>35.63</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.24</td><td>74.00</td><td>-28.76</td><td>48.95</td><td>36.56</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	44.78	74.00	-29.22	51.48	35.63	10.32	52.65	---	---	Peak	2	7386.00	45.24	74.00	-28.76	48.95	36.56	11.98	52.25	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>53.01</td><td>35.63</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>50.68</td><td>36.56</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	46.31	74.00	-27.69	53.01	35.63	10.32	52.65	---	---	Peak	2	7386.00	46.97	74.00	-27.03	50.68	36.56	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	44.78	74.00	-29.22	51.48	35.63	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	45.24	74.00	-28.76	48.95	36.56	11.98	52.25	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	46.31	74.00	-27.69	53.01	35.63	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	46.97	74.00	-27.03	50.68	36.56	11.98	52.25	---	---	Peak																																																																																																									

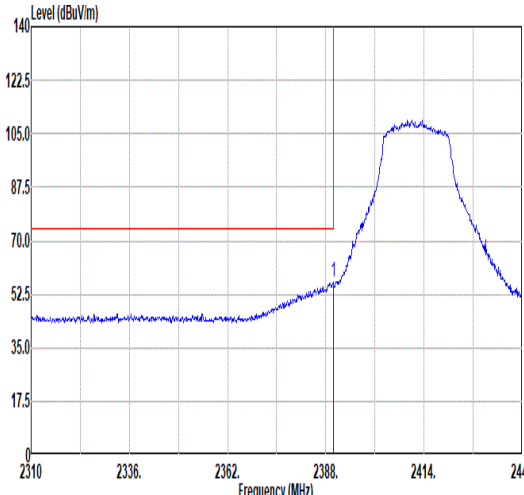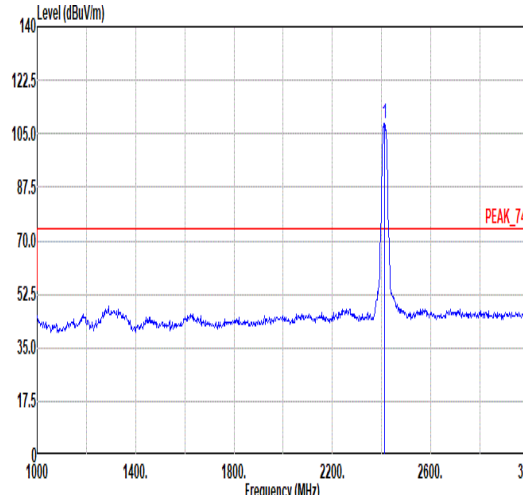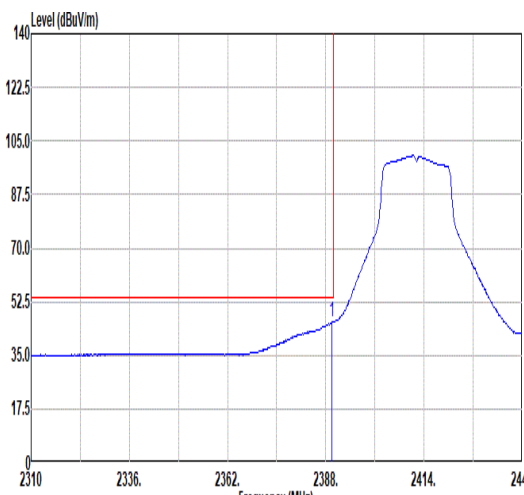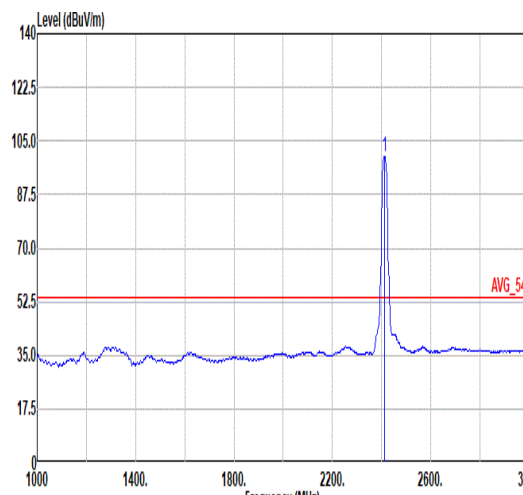

Mode	7																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>56.51</td><td>74.00</td><td>-17.49</td><td>51.87</td><td>30.41</td><td>6.87</td><td>32.64</td><td>347</td><td>85</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	56.51	74.00	-17.49	51.87	30.41	6.87	32.64	347	85	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>108.51</td><td>-----</td><td>-----</td><td>103.83</td><td>30.43</td><td>6.89</td><td>32.64</td><td>347</td><td>85</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.51	-----	-----	103.83	30.43	6.89	32.64	347	85
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	56.51	74.00	-17.49	51.87	30.41	6.87	32.64	347	85	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	108.51	-----	-----	103.83	30.43	6.89	32.64	347	85	PEAK																																																																																	
Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>45.95</td><td>54.00</td><td>-8.05</td><td>41.31</td><td>30.41</td><td>6.87</td><td>32.64</td><td>347</td><td>85</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	45.95	54.00	-8.05	41.31	30.41	6.87	32.64	347	85	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.09</td><td>-----</td><td>-----</td><td>95.41</td><td>30.43</td><td>6.89</td><td>32.64</td><td>347</td><td>85</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.09	-----	-----	95.41	30.43	6.89	32.64	347	85
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.69	45.95	54.00	-8.05	41.31	30.41	6.87	32.64	347	85	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	100.09	-----	-----	95.41	30.43	6.89	32.64	347	85	AVERAGE																																																																																	

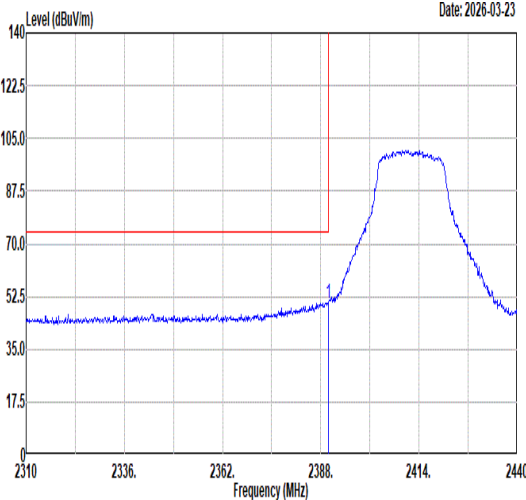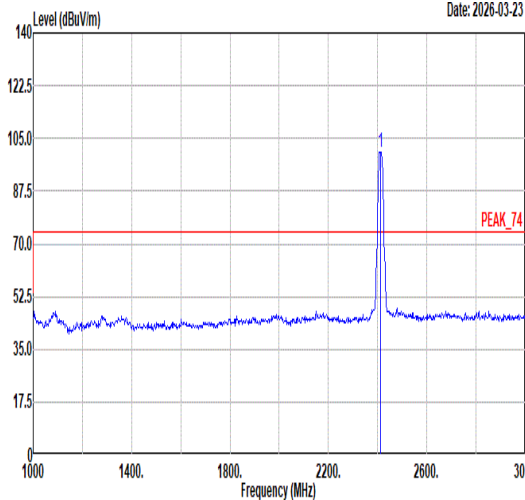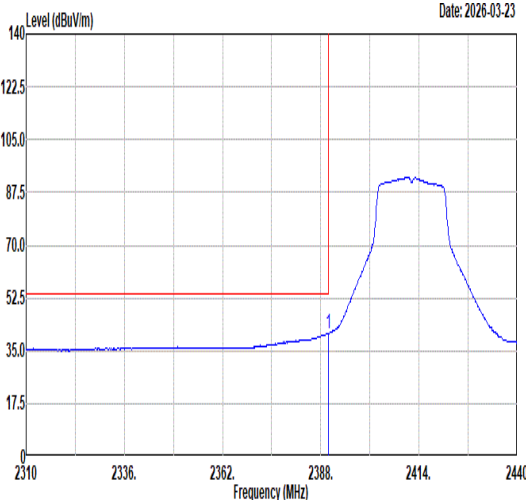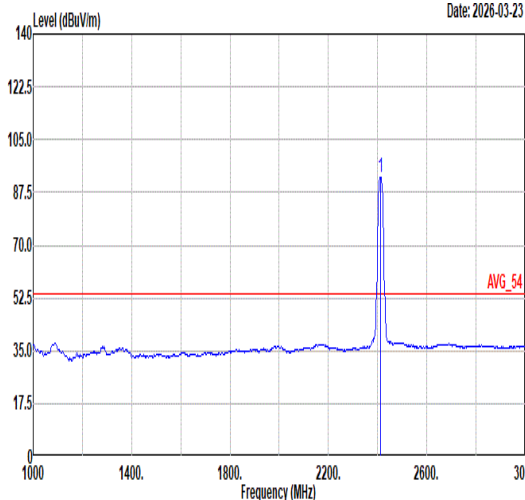





Mode	7																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.41</td><td>74.00</td><td>-23.59</td><td>45.77</td><td>30.41</td><td>6.87</td><td>32.64</td><td>309 130 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.41	74.00	-23.59	45.77	30.41	6.87	32.64	309 130 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.44</td><td>-----</td><td>-----</td><td>95.76</td><td>30.43</td><td>6.89</td><td>32.64</td><td>309 130 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.44	-----	-----	95.76	30.43	6.89	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	50.41	74.00	-23.59	45.77	30.41	6.87	32.64	309 130 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	100.44	-----	-----	95.76	30.43	6.89	32.64	309 130 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>36.14</td><td>30.41</td><td>6.87</td><td>32.64</td><td>309 130 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	40.78	54.00	-13.22	36.14	30.41	6.87	32.64	309 130 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>92.30</td><td>-----</td><td>-----</td><td>87.62</td><td>30.43</td><td>6.89</td><td>32.64</td><td>309 130 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.30	-----	-----	87.62	30.43	6.89	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	40.78	54.00	-13.22	36.14	30.41	6.87	32.64	309 130 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	92.30	-----	-----	87.62	30.43	6.89	32.64	309 130 AVERAGE																																																																																

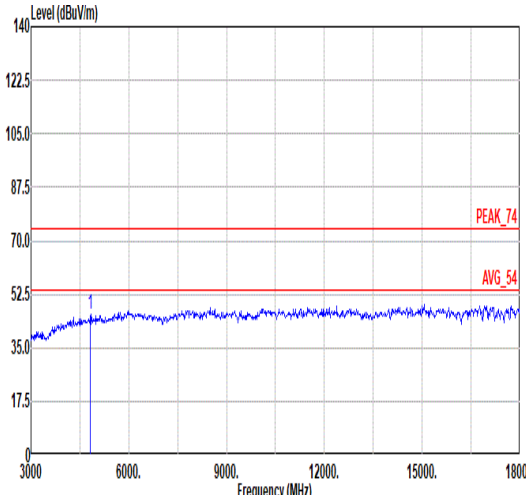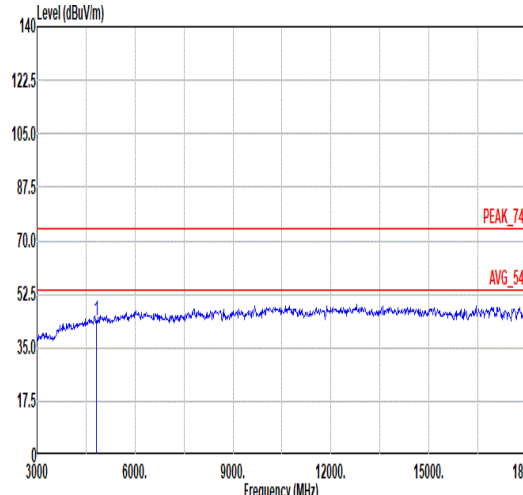		7																																																	
Mode		Harmonic																																																	
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																	
ANT		SISO																																																	
Pol.		Horizontal					Vertical																																												
Peak Avg																																																			
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.82</td><td>74.00</td><td>-28.18</td><td>52.84</td><td>35.41</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.82	74.00	-28.18	52.84	35.41	10.16	52.59	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	4824.00	45.82	74.00	-28.18	52.84	35.41	10.16	52.59	---	---	Peak																																								
																																																			
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>51.01</td><td>35.41</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.99	74.00	-30.01	51.01	35.41	10.16	52.59	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	4824.00	43.99	74.00	-30.01	51.01	35.41	10.16	52.59	---	---	Peak																																								







		8																																																																																					
Mode		Harmonic																																																																																					
		2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																					
ANT		SISO																																																																																					
Pol.		Horizontal					Vertical																																																																																
Peak Avg																																																																																							
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>53.53</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>300</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>35.44</td><td>54.00</td><td>-18.56</td><td>42.27</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>300</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>48.00</td><td>74.00</td><td>-26.00</td><td>51.74</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>100</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>39.23</td><td>54.00</td><td>-14.77</td><td>42.97</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>100</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	46.70	74.00	-27.30	53.53	35.52	10.27	52.62	100	300	Peak	2	4874.00	35.44	54.00	-18.56	42.27	35.52	10.27	52.62	100	300	Average	3	7311.00	48.00	74.00	-26.00	51.74	36.47	12.01	52.22	100	100	Peak	4	7311.00	39.23	54.00	-14.77	42.97	36.47	12.01	52.22	100	100	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	4874.00	46.70	74.00	-27.30	53.53	35.52	10.27	52.62	100	300	Peak																																																																												
2	4874.00	35.44	54.00	-18.56	42.27	35.52	10.27	52.62	100	300	Average																																																																												
3	7311.00	48.00	74.00	-26.00	51.74	36.47	12.01	52.22	100	100	Peak																																																																												
4	7311.00	39.23	54.00	-14.77	42.97	36.47	12.01	52.22	100	100	Average																																																																												
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.73</td><td>74.00</td><td>-23.27</td><td>57.56</td><td>35.52</td><td>10.27</td><td>52.62</td><td>200</td><td>245</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>48.24</td><td>35.52</td><td>10.27</td><td>52.62</td><td>200</td><td>245</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>52.86</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>333</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>46.55</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>333</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	50.73	74.00	-23.27	57.56	35.52	10.27	52.62	200	245	Peak	2	4874.00	41.41	54.00	-12.59	48.24	35.52	10.27	52.62	200	245	Average	3	7311.00	49.12	74.00	-24.88	52.86	36.47	12.01	52.22	100	333	Peak	4	7311.00	42.81	54.00	-11.19	46.55	36.47	12.01	52.22	100	333	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	4874.00	50.73	74.00	-23.27	57.56	35.52	10.27	52.62	200	245	Peak																																																																												
2	4874.00	41.41	54.00	-12.59	48.24	35.52	10.27	52.62	200	245	Average																																																																												
3	7311.00	49.12	74.00	-24.88	52.86	36.47	12.01	52.22	100	333	Peak																																																																												
4	7311.00	42.81	54.00	-11.19	46.55	36.47	12.01	52.22	100	333	Average																																																																												

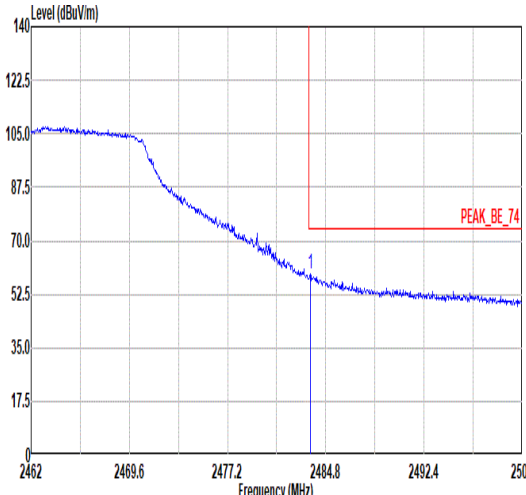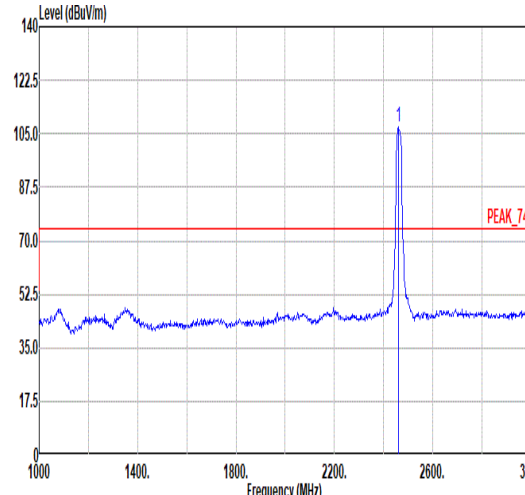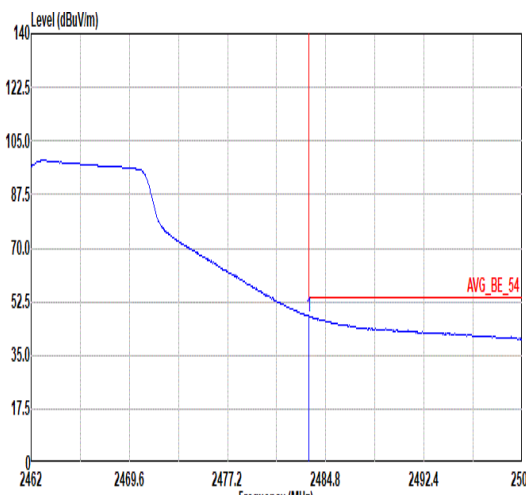
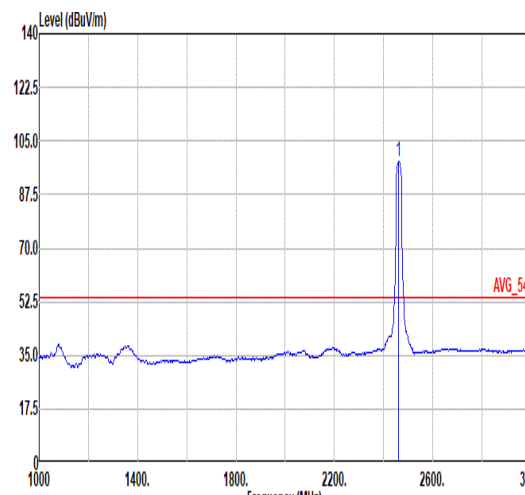


		9																																																																																																					
Mode		Band Edge																																																																																																					
		2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																					
ANT		SISO																																																																																																					
Pol.	Horizontal										Fundamental																																																																																												
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.58</td><td>59.20</td><td>74.00</td><td>-14.80</td><td>54.34</td><td>30.49</td><td>6.98</td><td>32.61</td><td>329</td><td>76</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.58	59.20	74.00	-14.80	54.34	30.49	6.98	32.61	329	76	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>107.30</td><td>-----</td><td>-----</td><td>102.50</td><td>30.47</td><td>6.95</td><td>32.62</td><td>329</td><td>76</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	107.30	-----	-----	102.50	30.47	6.95	32.62	329	76
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.58	59.20	74.00	-14.80	54.34	30.49	6.98	32.61	329	76	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	107.30	-----	-----	102.50	30.47	6.95	32.62	329	76	PEAK																																																																																												
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>47.67</td><td>54.00</td><td>-6.33</td><td>42.81</td><td>30.49</td><td>6.98</td><td>32.61</td><td>329</td><td>76</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	47.67	54.00	-6.33	42.81	30.49	6.98	32.61	329	76	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>98.45</td><td>-----</td><td>-----</td><td>93.65</td><td>30.47</td><td>6.95</td><td>32.62</td><td>329</td><td>76</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	98.45	-----	-----	93.65	30.47	6.95	32.62	329	76
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.51	47.67	54.00	-6.33	42.81	30.49	6.98	32.61	329	76	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	98.45	-----	-----	93.65	30.47	6.95	32.62	329	76	AVERAGE																																																																																												

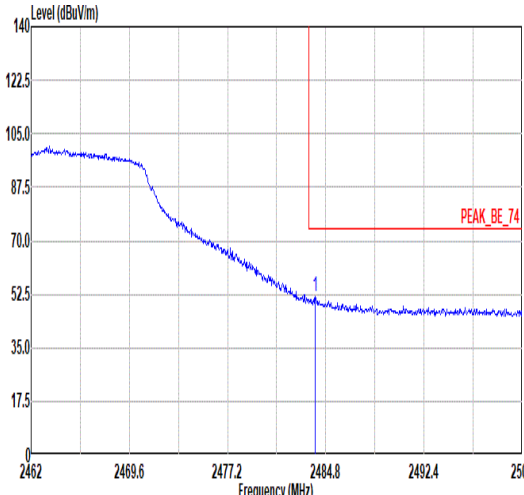
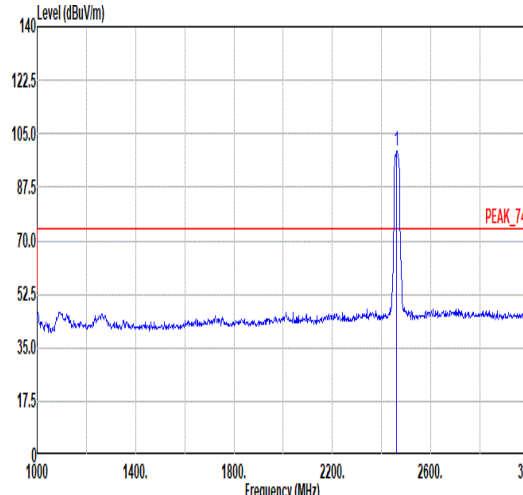
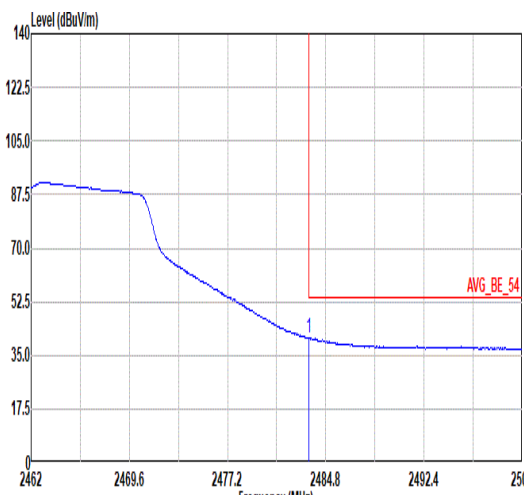
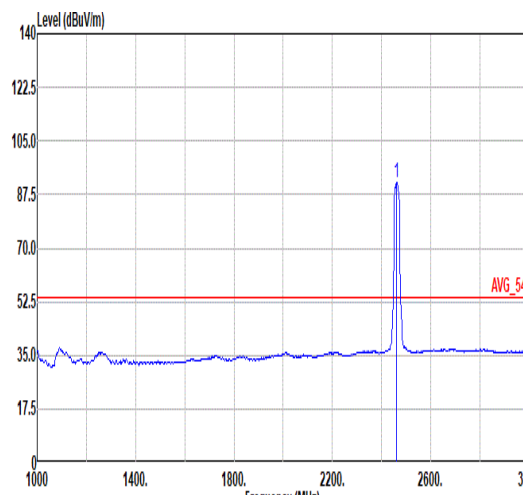


		9																																																																																						
Mode	Band Edge																																																																																							
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Vertical						Fundamental																																																																																	
Peak																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.00</td><td>51.64</td><td>74.00</td><td>-22.36</td><td>46.78</td><td>30.49</td><td>6.98</td><td>32.61</td><td>115</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.00	51.64	74.00	-22.36	46.78	30.49	6.98	32.61	115	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.47</td><td>-----</td><td>-----</td><td>94.67</td><td>30.47</td><td>6.95</td><td>32.62</td><td>115</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	99.47	-----	-----	94.67	30.47	6.95	32.62	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2484.00	51.64	74.00	-22.36	46.78	30.49	6.98	32.61	115	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2462.00	99.47	-----	-----	94.67	30.47	6.95	32.62	115	PEAK																																																																														
Avg																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>35.76</td><td>30.49</td><td>6.98</td><td>32.61</td><td>115</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.51	40.62	54.00	-13.38	35.76	30.49	6.98	32.61	115	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.43</td><td>-----</td><td>-----</td><td>86.63</td><td>30.47</td><td>6.95</td><td>32.62</td><td>115</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	91.43	-----	-----	86.63	30.47	6.95	32.62	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2483.51	40.62	54.00	-13.38	35.76	30.49	6.98	32.61	115	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2462.00	91.43	-----	-----	86.63	30.47	6.95	32.62	115	AVERAGE																																																																														

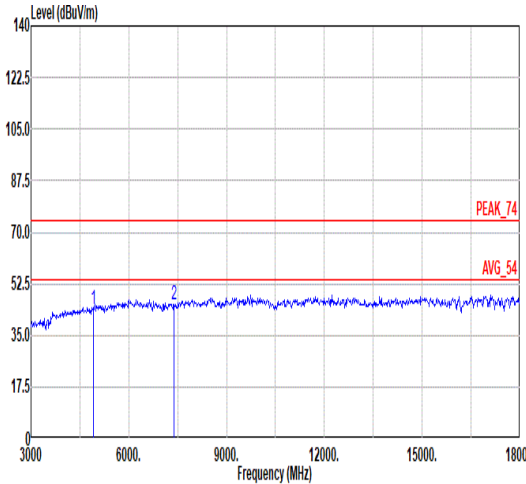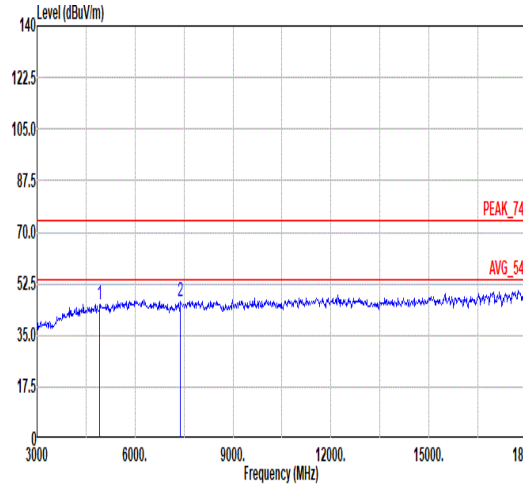

Mode	9																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.72</td><td>74.00</td><td>-30.28</td><td>50.42</td><td>35.63</td><td>10.32</td><td>52.65 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.22</td><td>74.00</td><td>-28.78</td><td>48.93</td><td>36.56</td><td>11.98</td><td>52.25 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	43.72	74.00	-30.28	50.42	35.63	10.32	52.65 --- Peak	2	7386.00	45.22	74.00	-28.78	48.93	36.56	11.98	52.25 --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>51.96</td><td>35.63</td><td>10.32</td><td>52.65 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>50.06</td><td>36.56</td><td>11.98</td><td>52.25 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	45.26	74.00	-28.74	51.96	35.63	10.32	52.65 --- Peak	2	7386.00	46.35	74.00	-27.65	50.06	36.56	11.98	52.25 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4924.00	43.72	74.00	-30.28	50.42	35.63	10.32	52.65 --- Peak																																																																																																		
2	7386.00	45.22	74.00	-28.78	48.93	36.56	11.98	52.25 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4924.00	45.26	74.00	-28.74	51.96	35.63	10.32	52.65 --- Peak																																																																																																		
2	7386.00	46.35	74.00	-27.65	50.06	36.56	11.98	52.25 --- Peak																																																																																																		

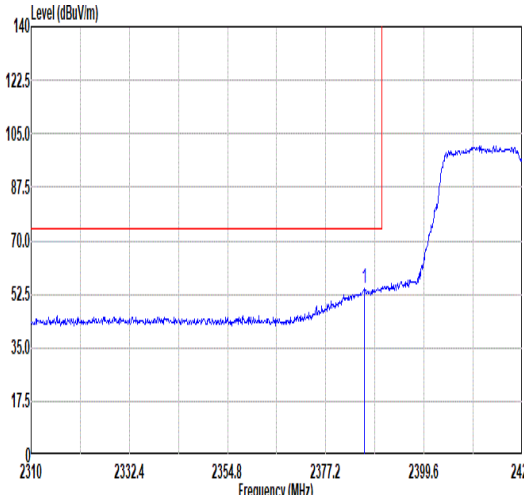
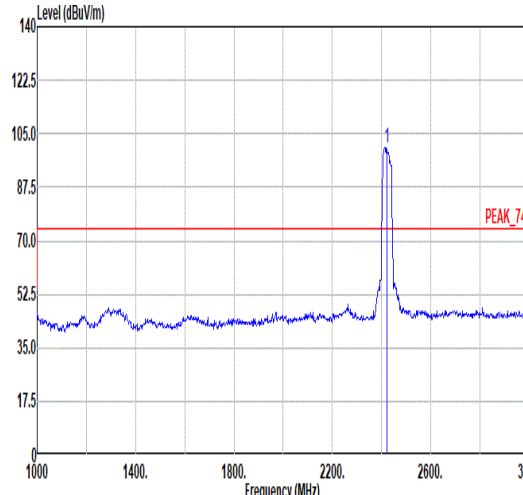
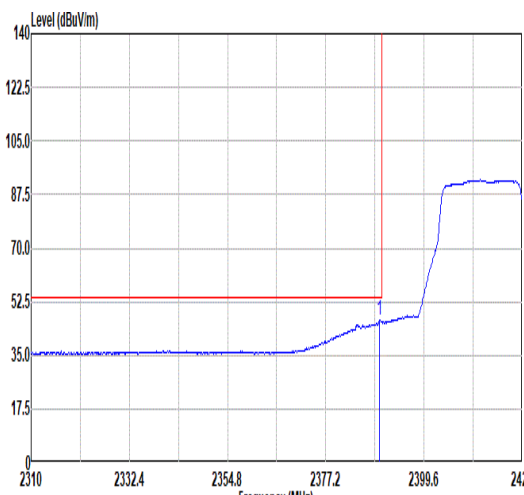
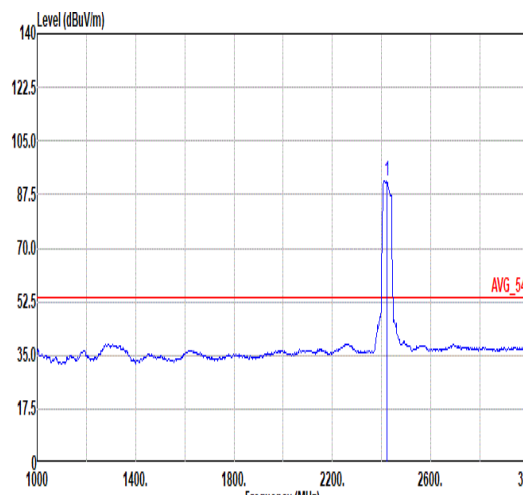


Mode	10																																																																																														
	Band Edge - L																																																																																														
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2385.94</td><td>54.63</td><td>74.00</td><td>-19.37</td><td>50.01</td><td>30.41</td><td>6.86</td><td>32.65</td><td>348</td><td>83</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2385.94	54.63	74.00	-19.37	50.01	30.41	6.86	32.65	348	83	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>100.63</td><td>-----</td><td>-----</td><td>95.94</td><td>30.43</td><td>6.89</td><td>32.63</td><td>348</td><td>83</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	100.63	-----	-----	95.94	30.43	6.89	32.63	348	83
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2385.94	54.63	74.00	-19.37	50.01	30.41	6.86	32.65	348	83	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2422.00	100.63	-----	-----	95.94	30.43	6.89	32.63	348	83	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.52</td><td>46.64</td><td>54.00</td><td>-7.36</td><td>42.00</td><td>30.41</td><td>6.87</td><td>32.64</td><td>348</td><td>83</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.52	46.64	54.00	-7.36	42.00	30.41	6.87	32.64	348	83	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>92.07</td><td>-----</td><td>-----</td><td>87.39</td><td>30.43</td><td>6.89</td><td>32.64</td><td>348</td><td>83</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	92.07	-----	-----	87.39	30.43	6.89	32.64	348	83
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.52	46.64	54.00	-7.36	42.00	30.41	6.87	32.64	348	83	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2422.00	92.07	-----	-----	87.39	30.43	6.89	32.64	348	83	AVERAGE																																																																																				





Mode	10																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal					Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.69</td><td>48.53</td><td>74.00</td><td>-25.47</td><td>43.63</td><td>30.50</td><td>7.00</td><td>32.60</td><td>348</td><td>83</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.69	48.53	74.00	-25.47	43.63	30.50	7.00	32.60	348	83	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2499.69	48.53	74.00	-25.47	43.63	30.50	7.00	32.60	348	83	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.04</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>34.54</td><td>30.49</td><td>6.99</td><td>32.60</td><td>348</td><td>83</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.04	39.42	54.00	-14.58	34.54	30.49	6.99	32.60	348	83	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2492.04	39.42	54.00	-14.58	34.54	30.49	6.99	32.60	348	83	AVERAGE																																								

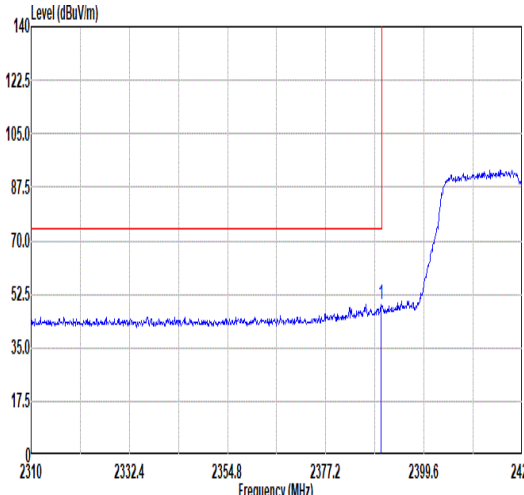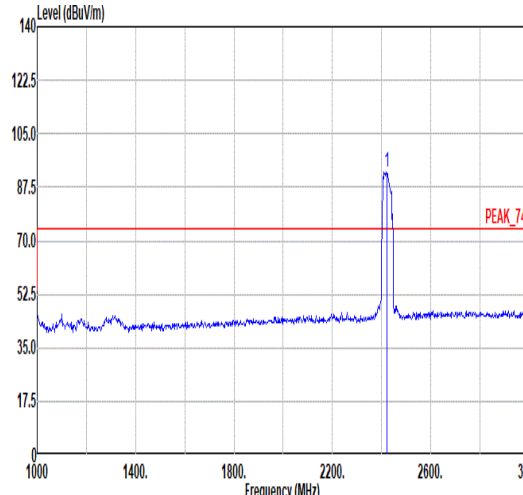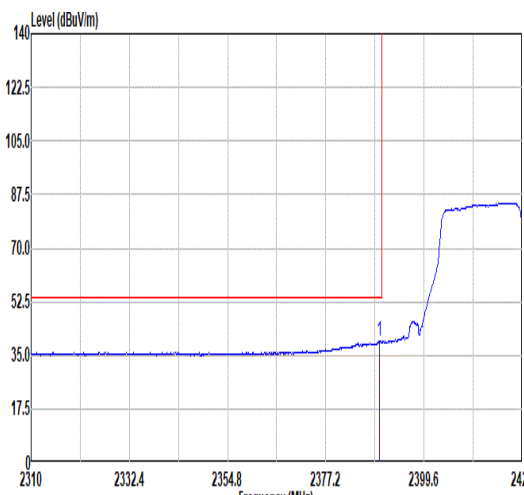
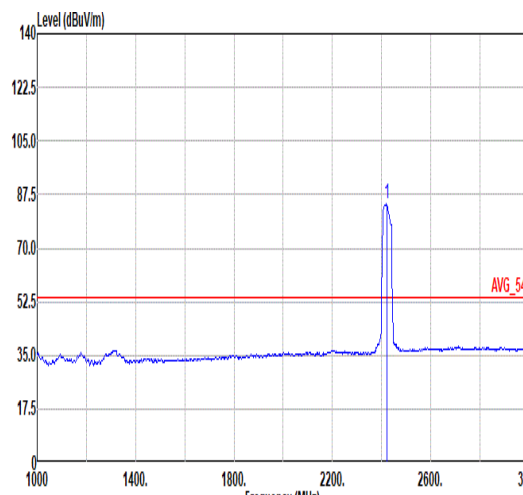


Mode	10																																																																																													
	Band Edge - L																																																																																													
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.74</td><td>49.05</td><td>74.00</td><td>-24.95</td><td>44.41</td><td>30.41</td><td>6.87</td><td>32.64</td><td>307</td><td>101</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.74	49.05	74.00	-24.95	44.41	30.41	6.87	32.64	307	101	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>92.57</td><td>-----</td><td>-----</td><td>87.86</td><td>30.44</td><td>6.90</td><td>32.63</td><td>307</td><td>101</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	92.57	-----	-----	87.86	30.44	6.90	32.63	307	101
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.74	49.05	74.00	-24.95	44.41	30.41	6.87	32.64	307	101	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2422.00	92.57	-----	-----	87.86	30.44	6.90	32.63	307	101	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.41</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>35.15</td><td>30.41</td><td>6.87</td><td>32.64</td><td>307</td><td>101</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.41	39.79	54.00	-14.21	35.15	30.41	6.87	32.64	307	101	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>84.70</td><td>-----</td><td>-----</td><td>80.00</td><td>30.43</td><td>6.90</td><td>32.63</td><td>307</td><td>101</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	84.70	-----	-----	80.00	30.43	6.90	32.63	307	101
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.41	39.79	54.00	-14.21	35.15	30.41	6.87	32.64	307	101	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2422.00	84.70	-----	-----	80.00	30.43	6.90	32.63	307	101	AVERAGE																																																																																			

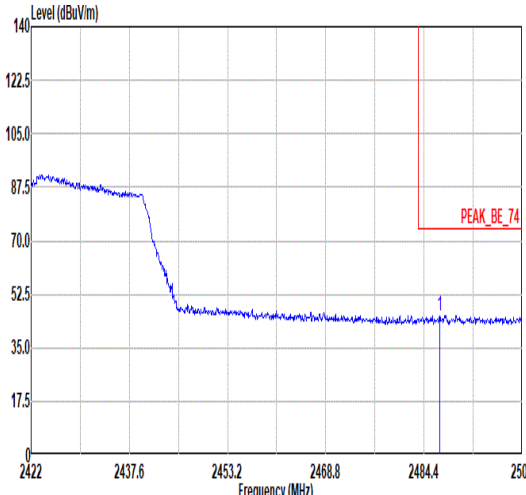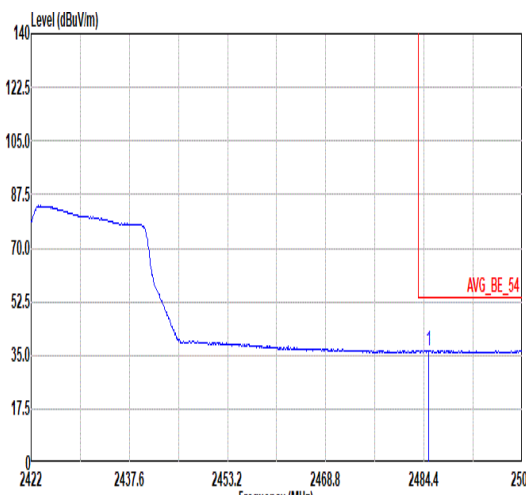

Mode	10																																																	
	Band Edge - R																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																	
ANT	SISO																																																	
Pol.	Vertical					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.90</td><td>45.65</td><td>74.00</td><td>-28.35</td><td>40.79</td><td>30.49</td><td>6.98</td><td>32.61</td><td>307</td><td>101</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.90	45.65	74.00	-28.35	40.79	30.49	6.98	32.61	307	101	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2486.90	45.65	74.00	-28.35	40.79	30.49	6.98	32.61	307	101	PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.10</td><td>36.65</td><td>54.00</td><td>-17.35</td><td>31.79</td><td>30.49</td><td>6.98</td><td>32.61</td><td>307</td><td>101</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2485.10	36.65	54.00	-17.35	31.79	30.49	6.98	32.61	307	101	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2485.10	36.65	54.00	-17.35	31.79	30.49	6.98	32.61	307	101	AVERAGE																																							



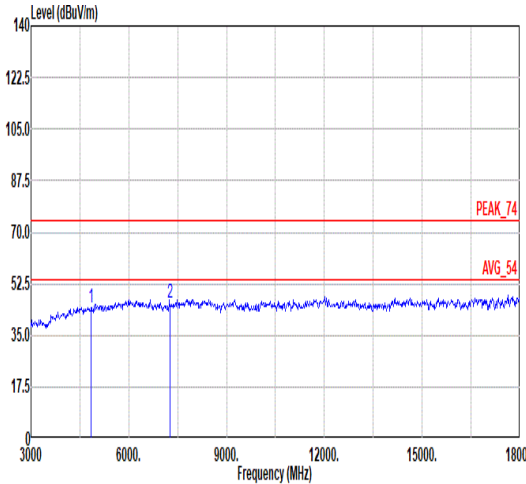
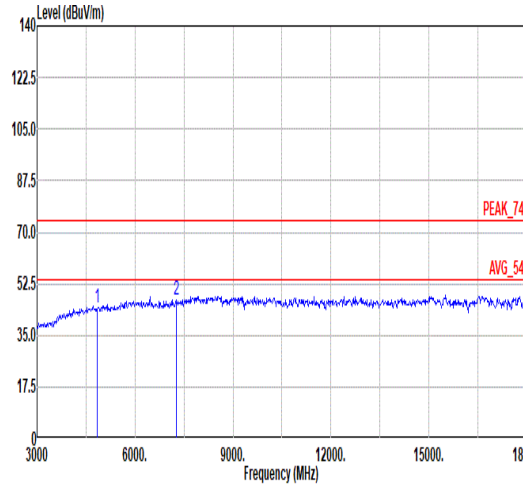


Mode	10																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>44.15</td><td>74.00</td><td>-29.85</td><td>51.10</td><td>35.46</td><td>10.20</td><td>52.61 --- Peak</td></tr><tr><td>2</td><td>7266.00</td><td>45.91</td><td>74.00</td><td>-28.09</td><td>49.76</td><td>36.42</td><td>11.94</td><td>52.21 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4844.00	44.15	74.00	-29.85	51.10	35.46	10.20	52.61 --- Peak	2	7266.00	45.91	74.00	-28.09	49.76	36.42	11.94	52.21 --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>51.25</td><td>35.46</td><td>10.20</td><td>52.61 --- Peak</td></tr><tr><td>2</td><td>7266.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>50.90</td><td>36.42</td><td>11.94</td><td>52.21 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4844.00	44.30	74.00	-29.70	51.25	35.46	10.20	52.61 --- Peak	2	7266.00	47.05	74.00	-26.95	50.90	36.42	11.94	52.21 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4844.00	44.15	74.00	-29.85	51.10	35.46	10.20	52.61 --- Peak																																																																																																		
2	7266.00	45.91	74.00	-28.09	49.76	36.42	11.94	52.21 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4844.00	44.30	74.00	-29.70	51.25	35.46	10.20	52.61 --- Peak																																																																																																		
2	7266.00	47.05	74.00	-26.95	50.90	36.42	11.94	52.21 --- Peak																																																																																																		





Mode	11																																																																																																																																																																		
	Harmonic																																																																																																																																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																																		
ANT	SISO																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																												
Peak Avg																																																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.86</td><td>74.00</td><td>-28.14</td><td>52.69</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>190</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>35.14</td><td>54.00</td><td>-18.86</td><td>41.97</td><td>35.52</td><td>10.27</td><td>52.62</td><td>100</td><td>190</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>51.23</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>20</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>43.23</td><td>36.47</td><td>12.01</td><td>52.22</td><td>100</td><td>20</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	45.86	74.00	-28.14	52.69	35.52	10.27	52.62	100	190	Peak	2	4874.00	35.14	54.00	-18.86	41.97	35.52	10.27	52.62	100	190	Average	3	7311.00	47.49	74.00	-26.51	51.23	36.47	12.01	52.22	100	20	Peak	4	7311.00	39.49	54.00	-14.51	43.23	36.47	12.01	52.22	100	20	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>51.07</td><td>74.00</td><td>-22.93</td><td>57.90</td><td>35.52</td><td>10.27</td><td>52.62</td><td>200</td><td>250</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>48.57</td><td>35.52</td><td>10.27</td><td>52.62</td><td>200</td><td>250</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>49.58</td><td>74.00</td><td>-24.42</td><td>53.32</td><td>36.47</td><td>12.01</td><td>52.22</td><td>106</td><td>337</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>43.78</td><td>54.00</td><td>-10.22</td><td>47.52</td><td>36.47</td><td>12.01</td><td>52.22</td><td>106</td><td>337</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	51.07	74.00	-22.93	57.90	35.52	10.27	52.62	200	250	Peak	2	4874.00	41.74	54.00	-12.26	48.57	35.52	10.27	52.62	200	250	Average	3	7311.00	49.58	74.00	-24.42	53.32	36.47	12.01	52.22	106	337	Peak	4	7311.00	43.78	54.00	-10.22	47.52	36.47	12.01	52.22	106	337
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																										
1	4874.00	45.86	74.00	-28.14	52.69	35.52	10.27	52.62	100	190	Peak																																																																																																																																																								
2	4874.00	35.14	54.00	-18.86	41.97	35.52	10.27	52.62	100	190	Average																																																																																																																																																								
3	7311.00	47.49	74.00	-26.51	51.23	36.47	12.01	52.22	100	20	Peak																																																																																																																																																								
4	7311.00	39.49	54.00	-14.51	43.23	36.47	12.01	52.22	100	20	Average																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																										
1	4874.00	51.07	74.00	-22.93	57.90	35.52	10.27	52.62	200	250	Peak																																																																																																																																																								
2	4874.00	41.74	54.00	-12.26	48.57	35.52	10.27	52.62	200	250	Average																																																																																																																																																								
3	7311.00	49.58	74.00	-24.42	53.32	36.47	12.01	52.22	106	337	Peak																																																																																																																																																								
4	7311.00	43.78	54.00	-10.22	47.52	36.47	12.01	52.22	106	337	Average																																																																																																																																																								

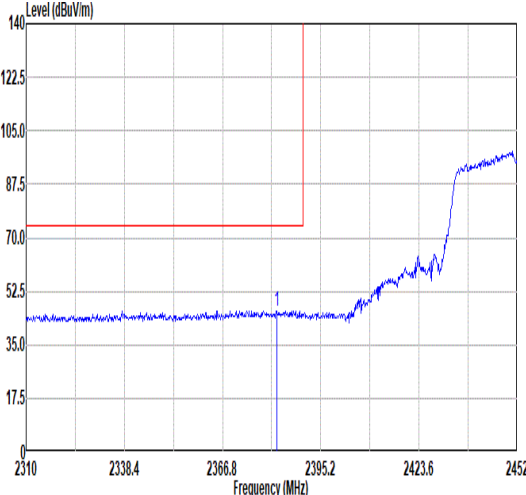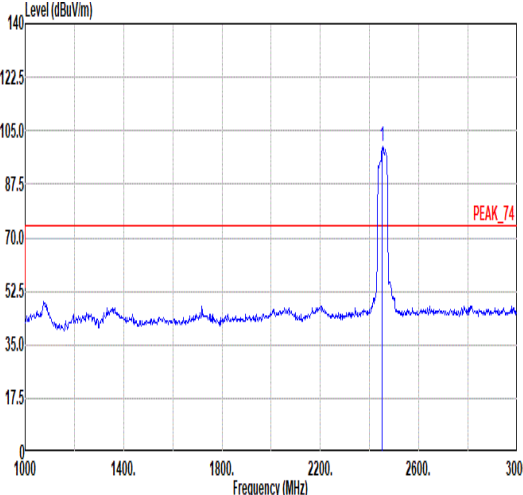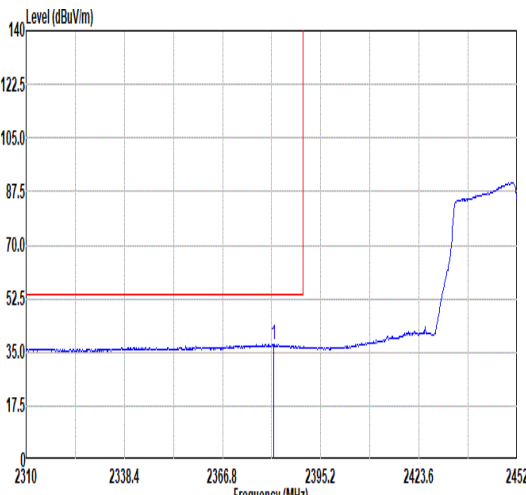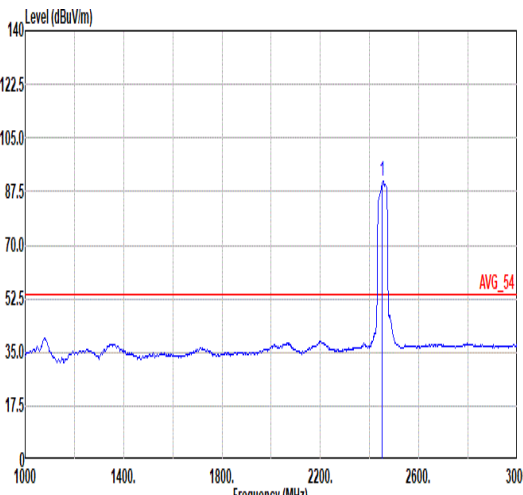

Mode	12																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.42</td><td>46.01</td><td>74.00</td><td>-27.99</td><td>41.39</td><td>30.41</td><td>6.86</td><td>32.65</td><td>328</td><td>75</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2382.42	46.01	74.00	-27.99	41.39	30.41	6.86	32.65	328	75	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>99.89</td><td>-----</td><td>-----</td><td>95.11</td><td>30.46</td><td>6.94</td><td>32.62</td><td>328</td><td>75</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	99.89	-----	-----	95.11	30.46	6.94	32.62	328	75
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2382.42	46.01	74.00	-27.99	41.39	30.41	6.86	32.65	328	75	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2452.00	99.89	-----	-----	95.11	30.46	6.94	32.62	328	75	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.57</td><td>37.60</td><td>54.00</td><td>-16.40</td><td>32.98</td><td>30.41</td><td>6.86</td><td>32.65</td><td>328</td><td>75</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2381.57	37.60	54.00	-16.40	32.98	30.41	6.86	32.65	328	75	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>90.86</td><td>-----</td><td>-----</td><td>86.08</td><td>30.46</td><td>6.94</td><td>32.62</td><td>328</td><td>75</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	90.86	-----	-----	86.08	30.46	6.94	32.62	328	75
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2381.57	37.60	54.00	-16.40	32.98	30.41	6.86	32.65	328	75	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2452.00	90.86	-----	-----	86.08	30.46	6.94	32.62	328	75	AVERAGE																																																																															

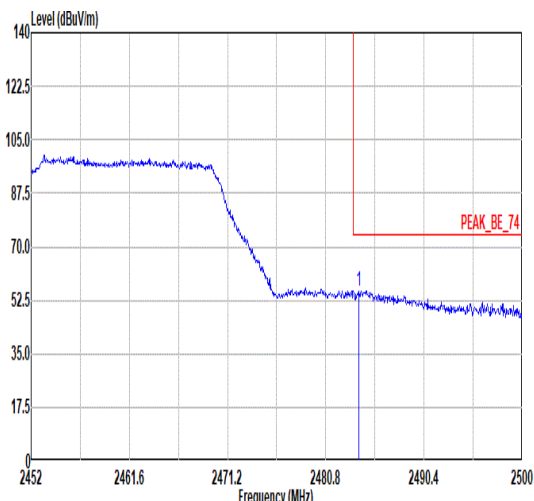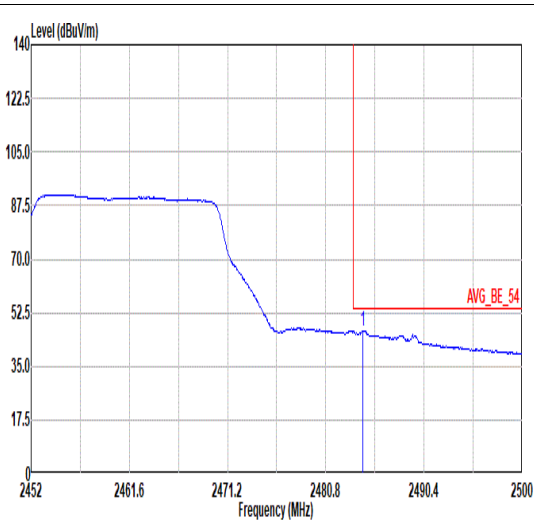

Mode	12																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_2452MHz																																													
ANT	SISO																																													
Pol.	Horizontal						Fundamental																																							
Peak							Blank																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.02</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>50.63</td><td>30.49</td><td>6.98</td><td>32.61</td><td>328</td><td>75</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.02	55.49	74.00	-18.51	50.63
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.02	55.49	74.00	-18.51	50.63	30.49	6.98	32.61	328	75	PEAK																																			
Avg							Blank																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.40</td><td>46.71</td><td>54.00</td><td>-7.29</td><td>41.85</td><td>30.49</td><td>6.98</td><td>32.61</td><td>328</td><td>75</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.40	46.71	54.00	-7.29	41.85
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.40	46.71	54.00	-7.29	41.85	30.49	6.98	32.61	328	75	AVERAGE																																			