RF TEST REPORT

FCC ID: 2A7OH-EA-XRN-7B004

Test Report No……..:	RF240314002-03-001
Product(s) Name……...:	Industrial touch all-in-one PC
Model(s)……..:	EA-XRN-7B004
Trade Mark……....:	N/A
Applicant……..:	Shenzhen Tengtek Technology Co., Ltd
Address……..…...:	Room 1202, Building 160, East Lisongkuang Community, Gongming Street, Guangming District, Shenzhen, China 518106
Receipt Date……..:	2024.03.24
Test Date……....:	2024.03.26~2024.04.11
Issued Date……..:	2024.04.15
Standards……..:	47 CFR FCC Part 15, Subpart C(Section 15.247); ANSI C63.10:2013
Testing Laboratory……:	Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Black Ding	Tim Zhang	Misue Su	
Black Ding	Tim.zhang	Misue Su	

Table of Contents

History of this test report.....4

1. General Information.....5

1.1 Applicant.....5
1.2 Manufacturer.....5
1.3 Basic Description of Equipment Under Test.....5
1.4 Transmit Operating Mode.....6

2. Summary of Test Results.....7

2.1 Summary of Test Items.....7
2.2 Application of Standard.....7
2.3 Test Instruments.....8
2.4 Test Mode.....9
2.5 Test Condition.....9
2.6 Duty Cycle of Test Signal.....10
2.7 Measurement Uncertainty.....12
2.8 Test Location.....12
2.9 Description of Support Units.....12
2.10 Deviation from Standards.....12

3. Test Procedure And Results.....13

3.1 AC Power Line Conducted Emission.....13
3.1.1 Limit.....13
3.1.2 Test Procedure.....13
3.1.3 Test Setup.....13
3.1.4 Test Result.....14
3.2 Radiated Emission and Band Edge.....16
3.2.1 Limit.....16
3.2.2 Test Procedure.....16
3.2.3 Test Setup.....17
3.2.4 Test Result.....19

3.3 Spurious Emission at Antenna Port 36
3.3.1 Limit 36
3.3.2 Test Procedure 36
3.3.3 Test Setup 37
3.3.4 The Result 38
3.4 6dB Bandwidth 55
3.4.1 Limit 55
3.4.2 Test Procedure 55
3.4.3 Test Setup 55
3.4.4 Test Result 56
3.5 Maximum conducted output power 68
3.5.1 Limit 68
3.5.2 Test Procedure 68
3.5.3 Test Setup 68
3.5.4 Table of Parameters of Text Software Setting 69
3.5.5 The Result 70
3.6 Power Spectral Density 71
3.6.1 Limit 71
3.6.2 Test Procedure 71
3.6.3 Test Setup 71
3.6.4 The Result 72

History of this test report

Original Report Issue Date: 2024.04.15

● No additional attachment

○ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Shenzhen Tengtek Technology Co., Ltd

Room 1202, Building 160, East Lisongkuang Community, Gongming Street, Guangming District, Shenzhen, China 518106

1.2 Manufacturer

Shenzhen Tengtek Technology Co., Ltd

Room 1202, Building 160, East Lisongkuang Community, Gongming Street, Guangming District, Shenzhen, China 518106

1.3 Basic Description of Equipment Under Test

Product No.	POC240314002-S003	
Equipment Name	Industrial touch all-in-one PC	
Model Name	EA-XRN-7B004	
Trade Mark	N/A	
Power Supply	DC 12V from adapter	
Adapter Information	Model: HKA09012070-7U Input: 100-240V~, 50/60Hz 1.5A Output: 12V⎓7.0A, 84.0W	
Operate temperature	0℃-45℃	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band and Conducted Output Power (Max power)	2400MHz ~ 2483.5MHz	●IEEE 802.11g:14.39dBm(0.027W)
Product Type	IEEE 802.11b: WLAN (SISO) IEEE 802.11g: WLAN(SISO) IEEE 802.11n: WLAN(SISO)	
Nominal Bandwidth	20MHz	
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM	
Data Rate (Mbps)	IEEE 802.11b mode : 1/2/5.5/11 IEEE 802.11g mode : 6/9/12/18/24/36/48/54 IEEE 11n mode : up to 72.2	
Antenna gain	1.09dBi	
Antenna type	External Antenna	

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	01	2412MHz	07	2442MHz
	02	2417MHz	08	2447MHz
	03	2422MHz	09	2452MHz
	04	2427MHz	10	2457MHz
	05	2432MHz	11	2462MHz
	06	2437MHz	/	/

1.4 Transmit Operating Mode

Transmit Operating Mode							Transmit Multiple Antennas					
●	Operating mode 1 (single antenna)						●	1TX				
○	Operating mode 2 (multiple antenna, no beam forming)						○	2TX	○	3TX	○	4TX
○	Operating mode 3 (multiple antenna, with beam forming)						○	2TX	○	3TX	○	4TX
●	802.11b	Operating mode	●	1TX	○	2TX	○	3TX				
●	802.11g	Operating mode	●	1TX	○	2TX	○	3TX				
●	802.11n(20MHz)	Operating mode	●	1TX	○	2TX	○	3TX				

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Test item	FCC Clause	Results	Remarks
AC Power Conducted Emission	15.207	Pass	Meet the requirement of the limit
Radiated Emission and Band Edge Measurement	15.205/15.209 /15.247(d)	Pass	Meet the requirement of the limit
Spurious Emission at Antenna Port	15.247(d)	Pass	Meet the requirement of the limit
6dB Bandwidth	15.247(a)(2)	Pass	Meet the requirement of the limit
Maximum Conducted Power	15.247(b)	Pass	Meet the requirement of the limit
Power Spectral Density	15.247(e)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note
Note: The EUT has an external antenna and the antenna connector is designed RP-SMA antenna interface.			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10:2013

2.3 Test Instruments

Radiated Emissions						
No.	Equipment	Manufacturer	Type No.	Serial No.	Cal. date (yyyy/mm/dd)	Cal. Due date (yyyy/mm/dd)
1	Test receiver	Rohde&Schwarz	ESU	100184	2023/5/3	2024/5/2
2	MXA Signal Analyzer	Keysight	N9010A	MY51440158	2023/4/22	2024/4/21
3	Log periodic antenna	Schwarzbeck	VULB 9168	1151	2023/5/4	2024/5/3
4	Low frequency amplifier	/	LNA 0920N	2014	2023/5/3	2024/5/2
5	High frequency amplifier	Schwarzbeck	BBV 9718	284	2023/5/3	2024/5/2
6	Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1273	2023/5/4	2024/5/3
7	Temp&Humidity Recorder	Meideshi	JR900	/	2023/5/3	2024/5/2
8	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	2023/7/16	2024/7/15
9	Loop Antenna	SCHWARZBECK	FMZB1519 B	00029	2023/7/16	2024/7/15
10	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	2023/5/3	2024/5/2
13	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2			
Conducted Emission						
1	LISN	Rohde&Schwarz	ENV216	100075	2023/5/3	2024/5/2
2	ISN	Schwarzbeck	CATE 5 8158	#171	2023/5/3	2024/5/2
3	Test receiver	Rohde&Schwarz	ESCI	100718	2023/5/3	2024/5/2
4	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	2023/5/3	2024/5/2
5	Temp&Humidity Recorder	Meideshi	JR900	/	2023/5/3	2024/5/2
6	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2			
RF Conducted Emission						
1	MXA Signal Analyzer	Keysight	N9021B	MY60080169	2023/4/23	2024/4/22
2	RF Control Unit	dsusoft	JS0806-2	21G8060449	2023/4/23	2024/4/22
3	power supply unit	dsusoft	JS0806-4ADC	N/A	2023/4/23	2024/4/22
4	VXG Signal Generator	Keysight	M9384B	MY61270787	2023/4/23	2024/4/22
5	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	2023/4/23	2024/4/22
6	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K50-116064-Dt	2023/4/23	2024/4/22
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0			

2.4 Test Mode

Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	802.11g	6Mbps	11
Radiated Emission and Band Edge Measurement	802.11b	1Mbps	01/06/11
	802.11g	6Mbps	01/06/11
	802.11n20SISO	MCS0	01/06/11
Spurious Emission at Antenna Port	802.11b	1Mbps	01/06/11
	802.11g	6Mbps	01/06/11
	802.11n20SISO	MCS0	01/06/11
6dB Bandwidth	802.11b	1Mbps	01/06/11
	802.11g	6Mbps	01/06/11
	802.11n20SISO	MCS0	01/06/11
Maximum Conducted Power	802.11b	1Mbps	01/06/11
	802.11g	6Mbps	01/06/11
	802.11n20SISO	MCS0	01/06/11
Power Spectral Density	802.11b	1Mbps	01/06/11
	802.11g	6Mbps	01/06/11
	802.11n20SISO	MCS0	01/06/11

Note: For AC Power Conducted Emission and Radiated Emission below 1GHz, only worst case was recorded.

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	24.8°C, 48% RH	AC 120V/60Hz	Freedom Zhuo
Radiated Emission and Band Edge Measurement	23.6C, 56% RH	AC 120V/60Hz	Freedom Zhuo
Spurious Emission at Antenna Port	23.6°C, 53% RH	DC 12V	Albert Fan
6dB Bandwidth	23.6°C, 53% RH	DC 12V	Albert Fan
Maximum Conducted Power	23.6°C, 53% RH	DC 12V	Albert Fan
Power Spectral Density	23.6°C, 53% RH	DC 12V	Albert Fan

Note: Adapter supply voltage AC 120V/60Hz.
The applicant declare the operating environment of EUT as below:
Normal conditions: 12V DC, 0~45°C

2.6 Duty Cycle of Test Signal

If duty cycle is ≥ 98 %, duty factor is not required.

If duty cycle is < 98 %, duty factor shall be considered.

All the duty factor of other test mode have been considered.

Test Mode	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	2412	17.00	17.00	100.00
11G	2412	2.07	2.09	99.04
11N20	2412	1.92	1.94	98.97

11B_2412

11G_2412

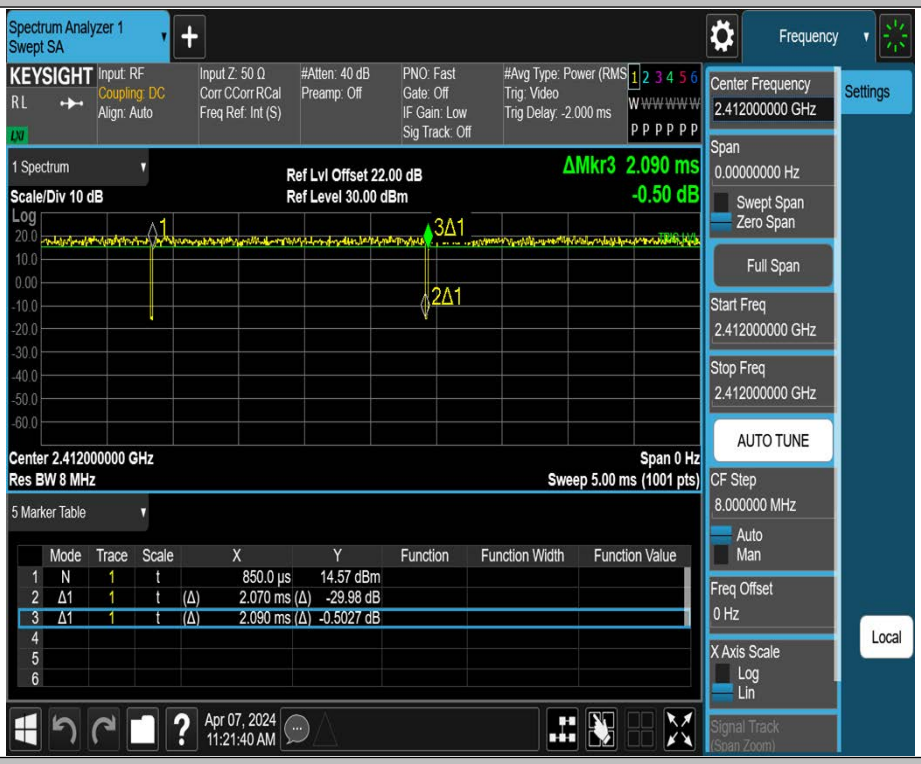

11N20_2412

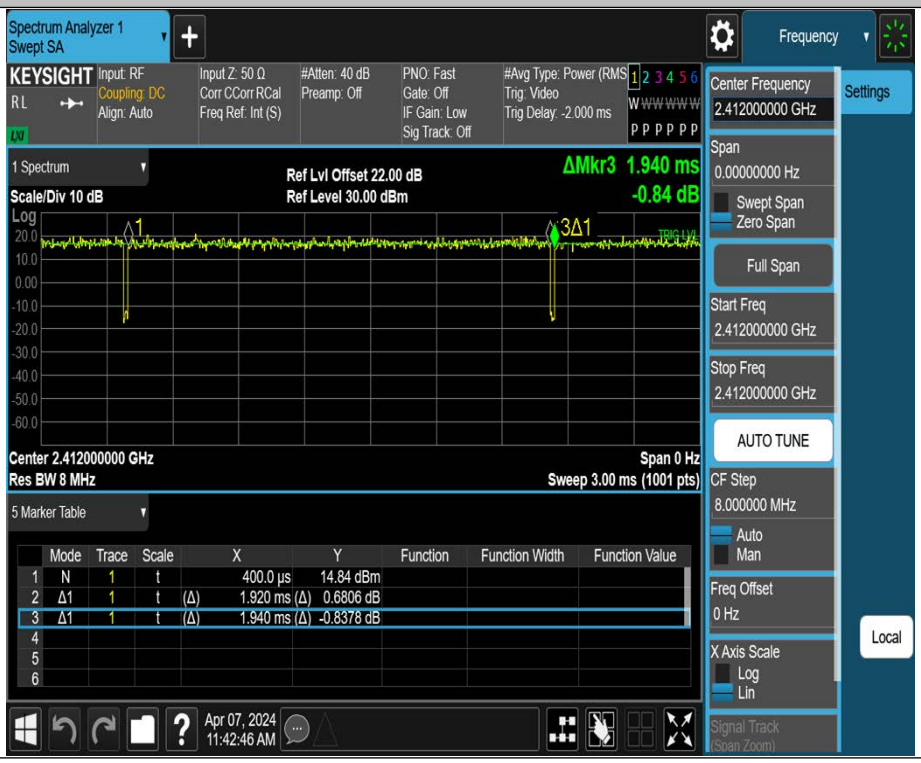

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±143.88kHz
Power Spectral Density	±0.743dB
Conducted Spurious Emission	±1.328dB
RF power conducted	±0.384dB
Conducted emission(9kHz~30MHz) AC main	±2.72dB
Radiated emission(9kHz~30MHz)	±2.66dB
Radiated emission (30MHz~1GHz)	±4.62dB
Radiated emission (1GHz~18GHz)	±4.86dB
Radiated emission (18GHz~40GHz)	±3.80dB

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical CO., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier	CN0145
A2LA Certificate Number	6823.01
Telephone:	0755-26024411

2.9 Description of Support Units

No.	Equipment	Model	Manufacturer	Series No
1	Displayer	T24S-28	LENOVO	M032004854IT
2	Mouse	DOK-680U	LENOVO	701E8328
3	Earphone	E1	LENOVO	/
4	USB Disk	32GB	Kingston	/
5	Keyboard	SK-8827	LENOVO	21R1ADL

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.1.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
○Lowest, Middle and Highest Channel	○Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

a) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c) The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

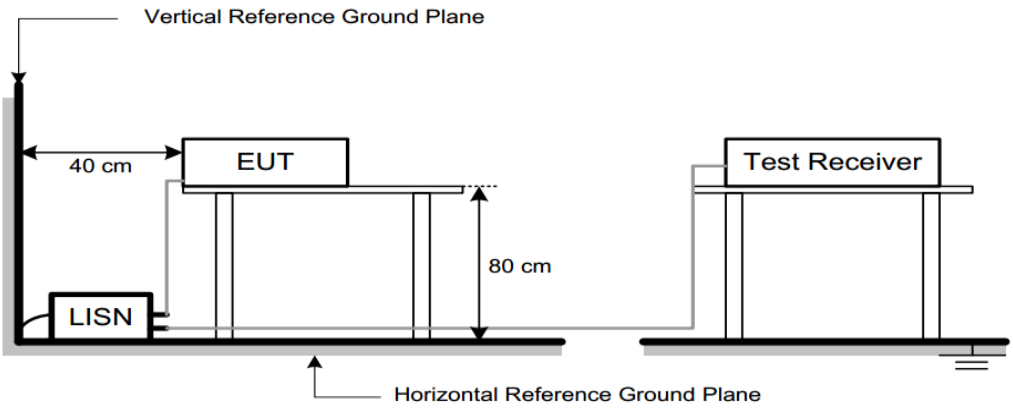

3.1.4 Test Result

Note:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement – Limit

We only recorded the data of the worst mode. Please see the following:

150kHz~30MHz	Worst Case Operating Mode: 11G Channel 11

Line

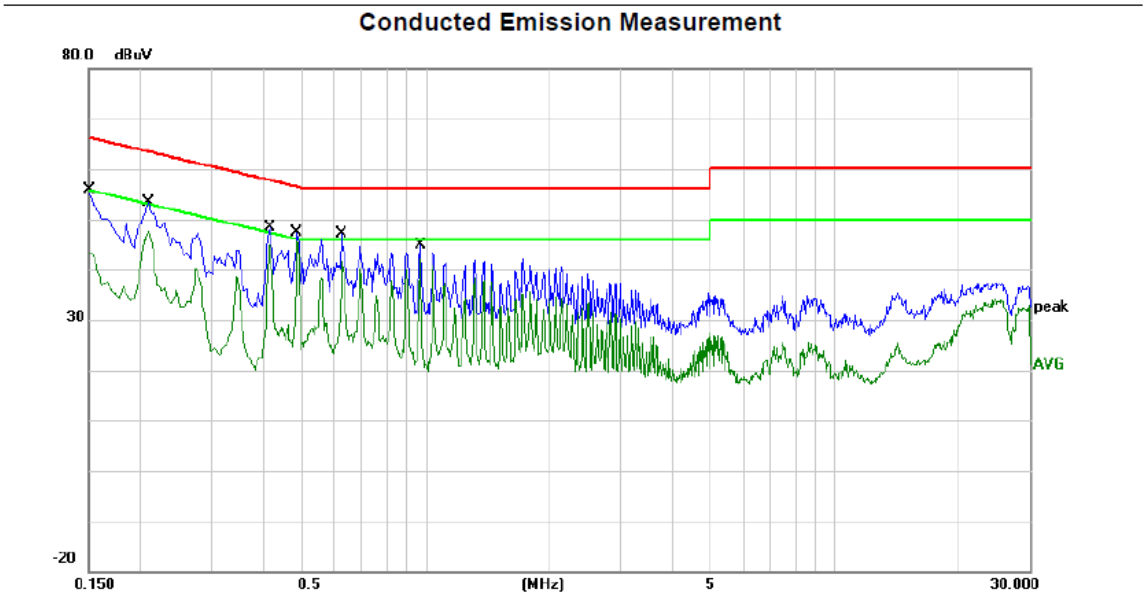

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	30.45	20.05	50.50	66.00	-15.50	QP	
2		0.1500	23.27	20.05	43.32	56.00	-12.68	AVG	
3		0.2100	29.86	19.99	49.85	63.21	-13.36	QP	
4		0.2100	26.94	19.99	46.93	53.21	-6.28	AVG	
5		0.4180	25.40	20.34	45.74	57.49	-11.75	QP	
6		0.4180	23.66	20.34	44.00	47.49	-3.49	AVG	
7		0.4860	23.02	20.23	43.25	56.24	-12.99	QP	
8	*	0.4860	25.37	20.23	45.60	46.24	-0.64	AVG	
9		0.6220	22.01	20.03	42.04	56.00	-13.96	QP	
10		0.6220	17.27	20.03	37.30	46.00	-8.70	AVG	
11		0.9700	23.45	20.04	43.49	56.00	-12.51	QP	
12		0.9700	22.29	20.04	42.33	46.00	-3.67	AVG	

150kHz~30MHz	Worst Case Operating Mode: 11G Channel 11

Neutral

Conducted Emission Measurement

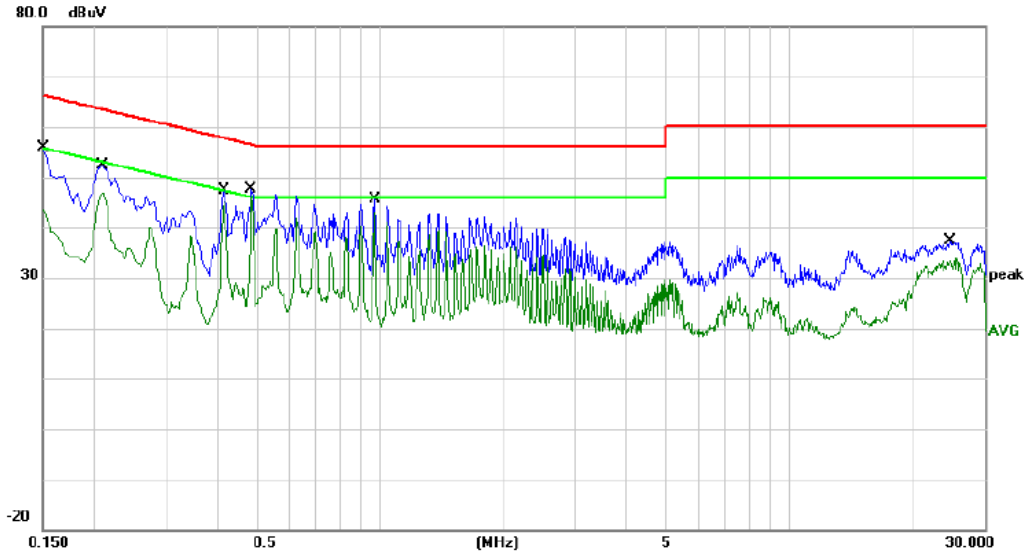

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	30.54	20.30	50.84	66.00	-15.16	QP	
2		0.1500	23.04	20.30	43.34	56.00	-12.66	AVG	
3		0.2100	29.72	20.29	50.01	63.21	-13.20	QP	
4		0.2100	26.57	20.29	46.86	53.21	-6.35	AVG	
5		0.4180	25.12	20.20	45.32	57.49	-12.17	QP	
6		0.4180	23.55	20.20	43.75	47.49	-3.74	AVG	
7		0.4860	26.18	20.06	46.24	56.24	-10.00	QP	
8	*	0.4860	25.72	20.06	45.78	46.24	-0.46	AVG	
9		0.9700	23.93	20.03	43.96	56.00	-12.04	QP	
10		0.9700	22.70	20.03	42.73	46.00	-3.27	AVG	
11		24.7260	14.63	20.05	34.68	60.00	-25.32	QP	
12		24.7260	12.34	20.05	32.39	50.00	-17.61	AVG	

3.2 Radiated Emission and Band Edge

3.2.1 Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		μV/m	dB(μV)/m
0.009 – 0.49	300	2400/F(kHz)	-
0.490 – 1.705	30	24000/F(kHz)	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) Emission level dBμV = 20 log Emission level μV/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2.2 Test Procedure

Test Method	
○Conducted Measurement	●Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)

b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)

c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of

the antenna are set to make the measurement.

d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).

e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1 GHz)

h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1 GHz)

i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 Test Setup

(A) Radiated Emission Test Set-Up Frequency Below 30 MHz

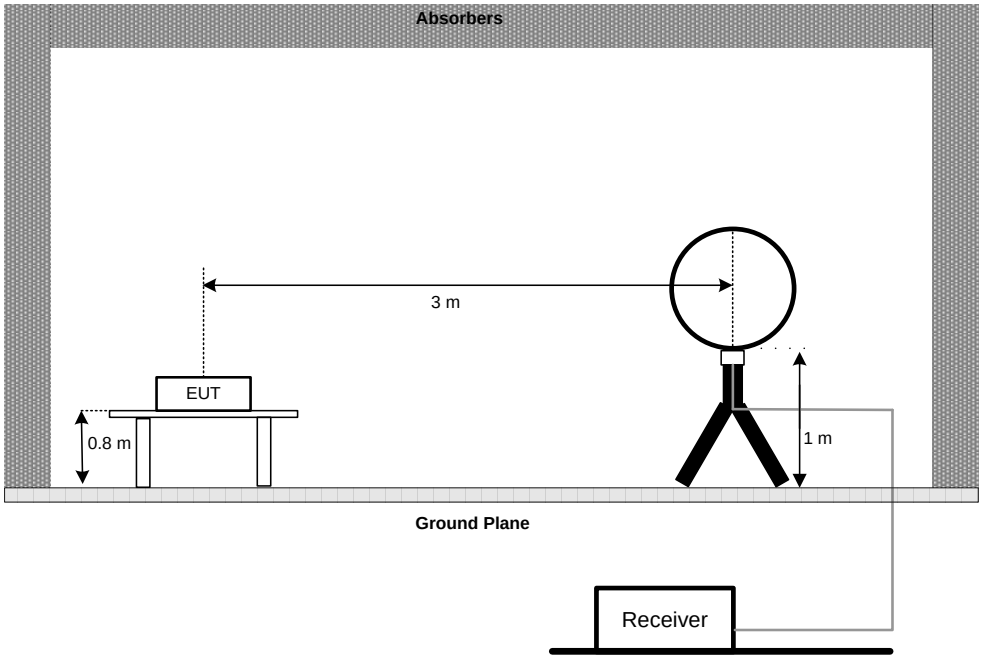

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

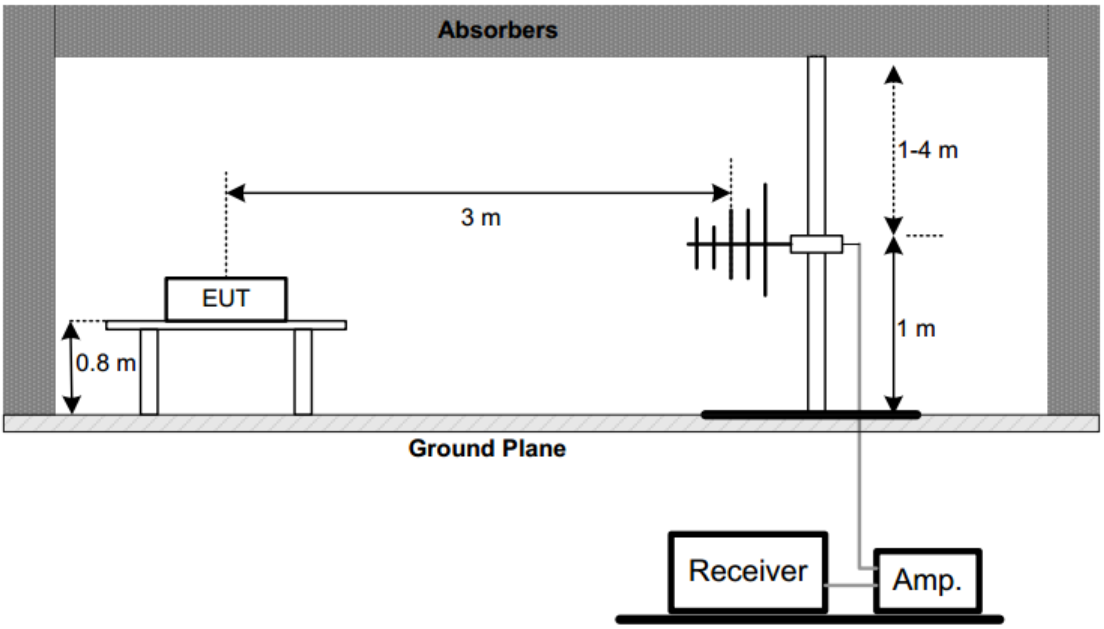

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

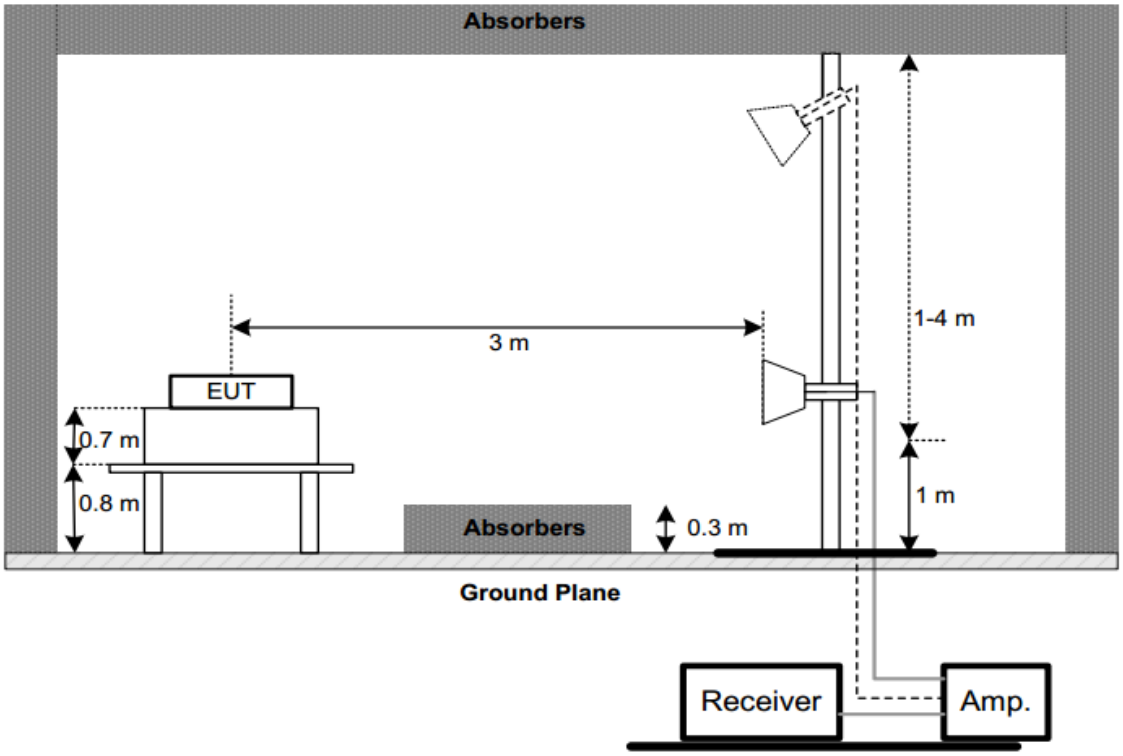

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

2) Radiated emission: 30MHz-1G

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit

We only recorded the data of the worst mode. Please see the following:

Below 1G (30MHz~1GHz)	Worst Case Operating Mode: 11G Channel 11

VERTICAL

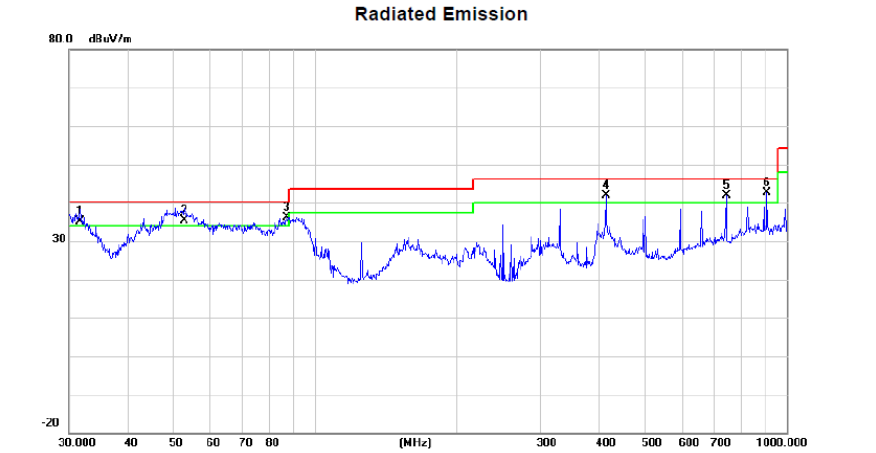

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	!	31.6201	46.02	-10.90	35.12	40.00	-4.88	QP			
2	!	52.7600	44.52	-9.13	35.39	40.00	-4.61	QP			
3	!	86.8067	49.53	-13.35	36.18	40.00	-3.82	peak			
4	!	413.2706	47.39	-5.54	41.85	46.00	-4.15	peak			
5	!	744.8660	40.78	1.12	41.90	46.00	-4.10	peak			
6	*	909.6666	39.39	3.27	42.66	46.00	-3.34	peak			

HORIZONTAL

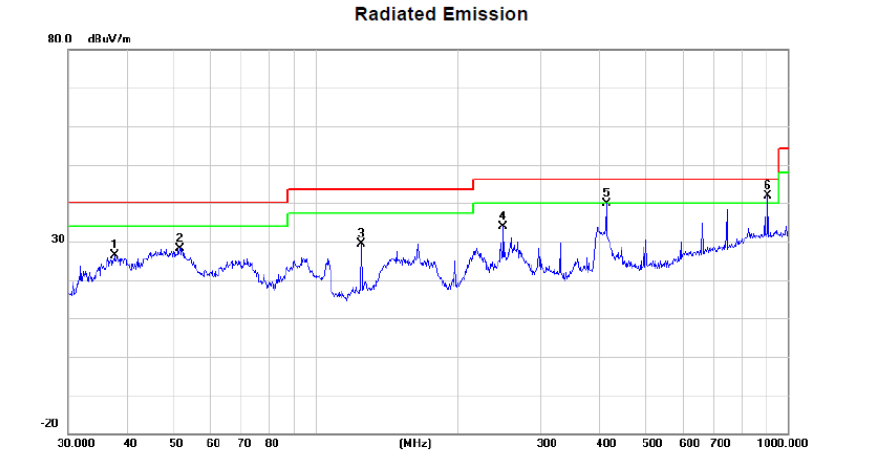

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		37.5478	36.40	-10.12	26.28	40.00	-13.72	peak			
2		51.6613	37.38	-9.23	28.15	40.00	-11.85	peak			
3		125.0065	39.15	-9.83	29.32	43.50	-14.18	peak			
4		250.3010	44.69	-10.76	33.93	46.00	-12.07	peak			
5		413.2706	45.50	-5.54	39.96	46.00	-6.04	peak			
6	*	909.6666	38.67	3.27	41.94	46.00	-4.06	peak			

3) Radiated emission: Above 1G

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit

Above 1G (1GHz~18GHz)	Test mode:11B	Test Channel:1

VERTICAL

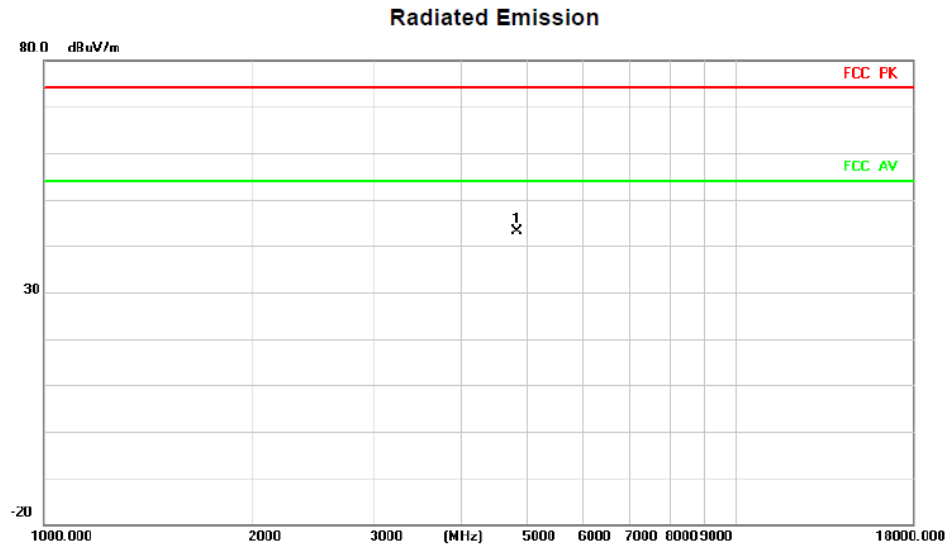

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	33.08	10.00	43.08	74.00	-30.92	peak

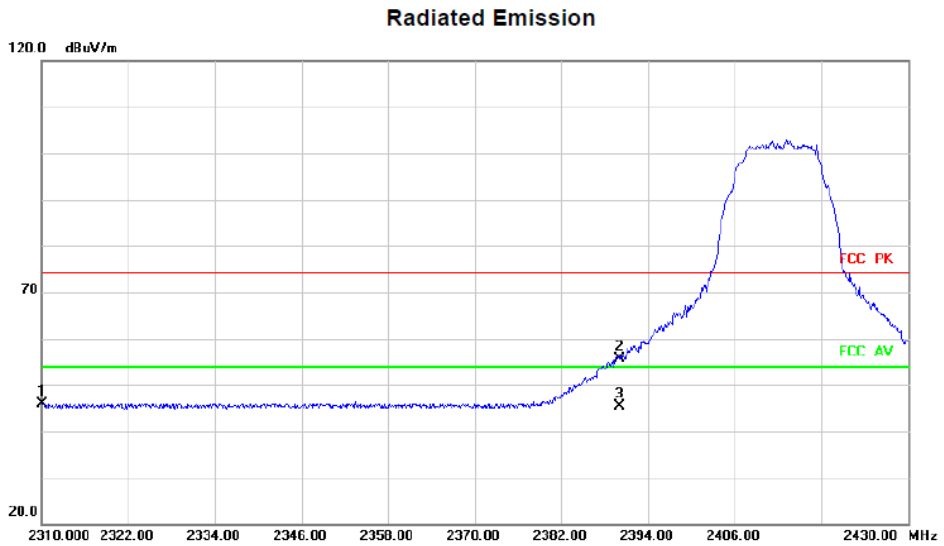

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	45.65	0.19	45.84	74.00	-28.16	peak
2		2390.000	55.21	0.41	55.62	74.00	-18.38	peak
3	*	2390.000	44.97	0.41	45.38	54.00	-8.62	AVG

HORIZONTA

Radiated Emission

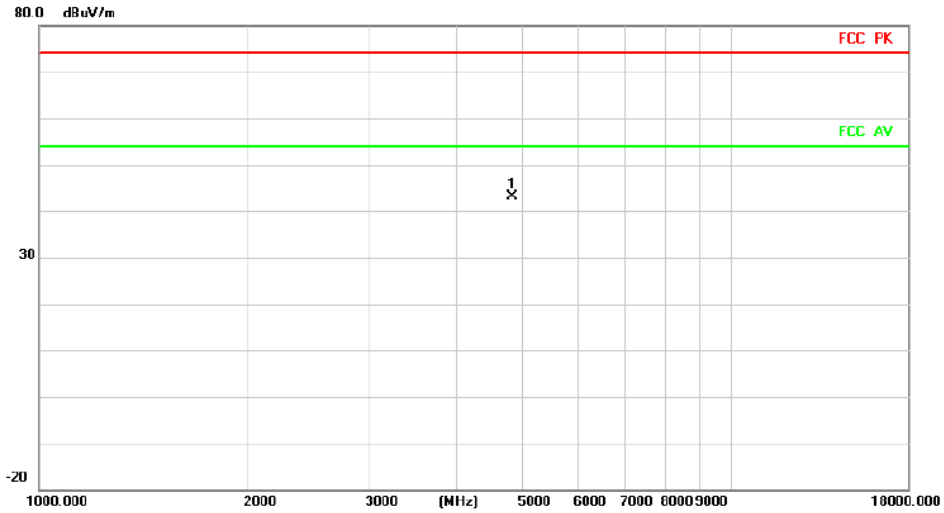

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	33.12	10.00	43.12	74.00	-30.88	peak

Radiated Emission

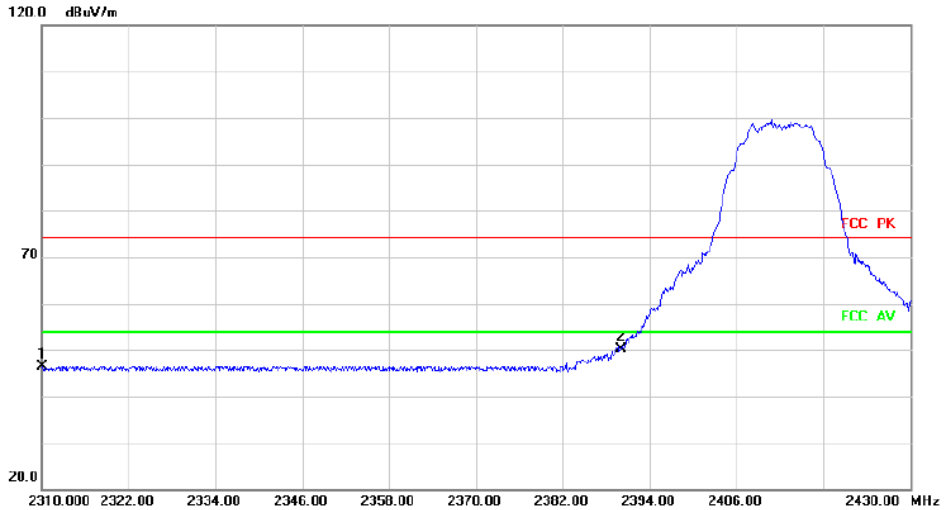

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	46.09	0.19	46.28	74.00	-27.72	peak
2	*	2390.000	49.73	0.41	50.14	74.00	-23.86	peak

Above 1G (1GHz~18GHz)	Test mode:11B	Test Channel:6

VERTICAL

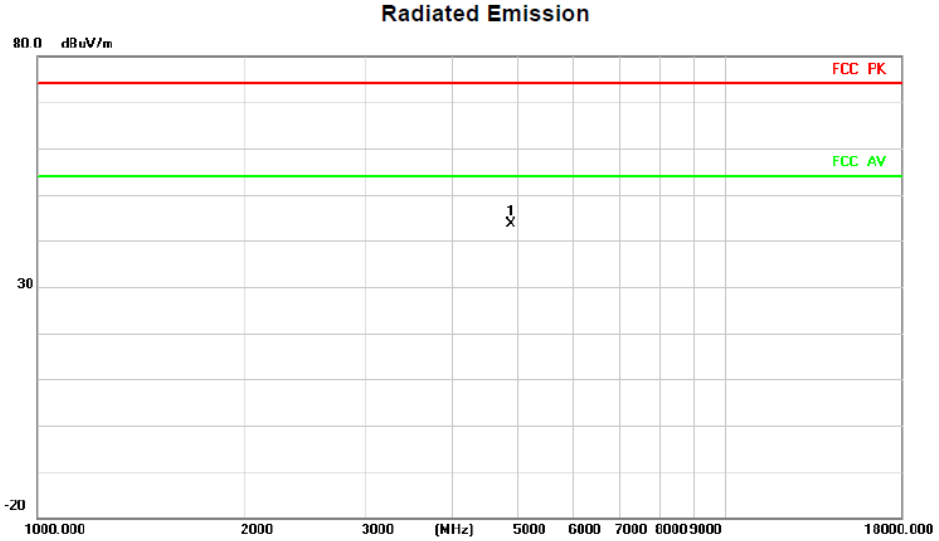

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	33.65	10.00	43.65	74.00	-30.35	peak

HORIZONTA

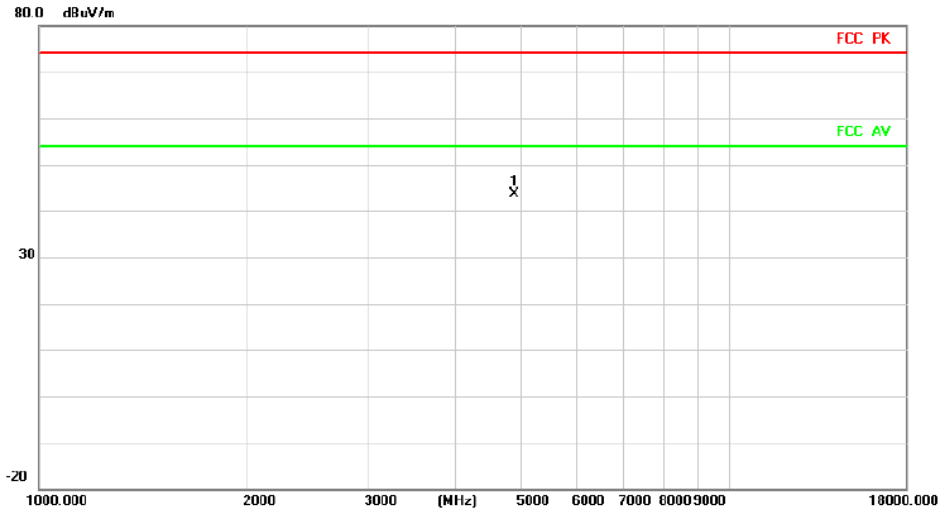

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	33.51	10.00	43.51	74.00	-30.49	peak

Above 1G (1GHz~18GHz)	Test mode: 11B	Test Channel:11

VERTICAL

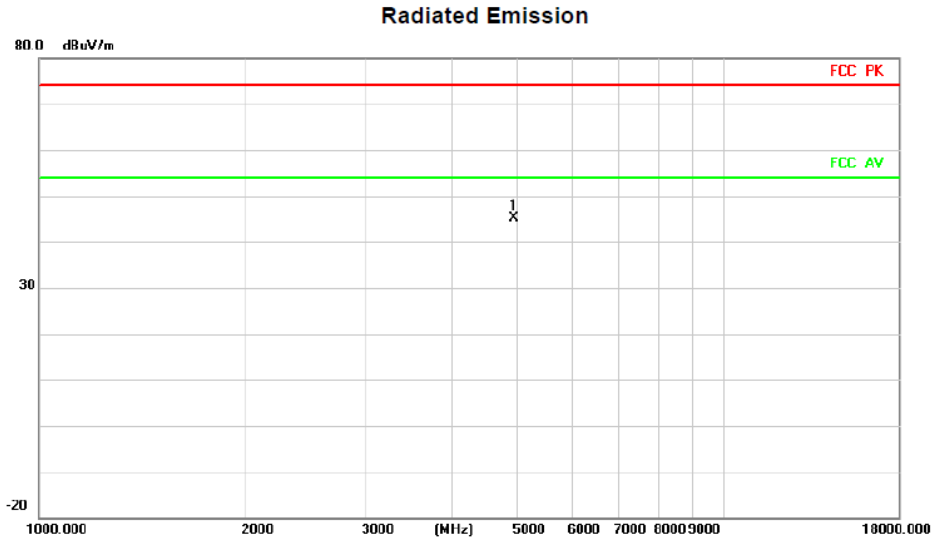

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	35.04	10.00	45.04	74.00	-28.96	peak

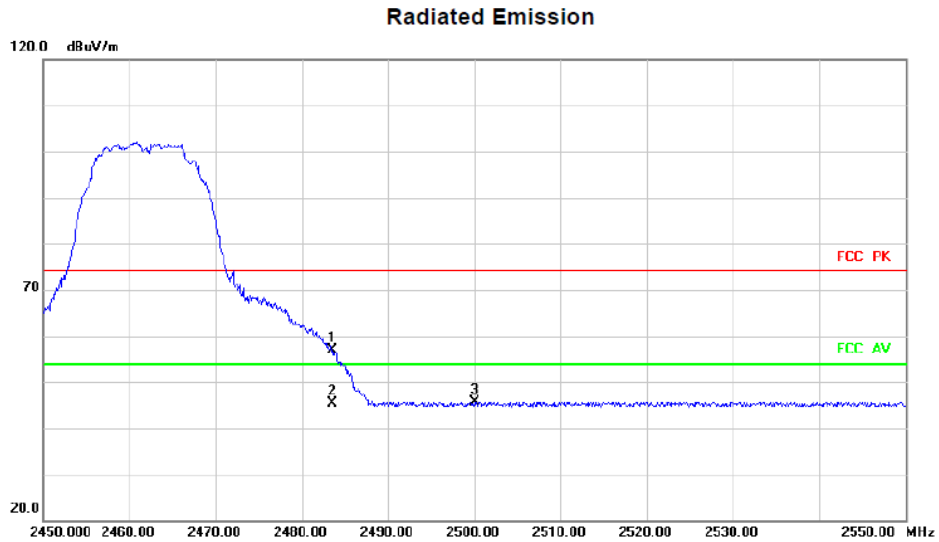

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.500	55.74	1.09	56.83	74.00	-17.17	peak
2	*	2483.500	44.19	1.09	45.28	54.00	-8.72	AVG
3		2500.000	44.40	1.22	45.62	74.00	-28.38	peak

HORIZONTA

Radiated Emission

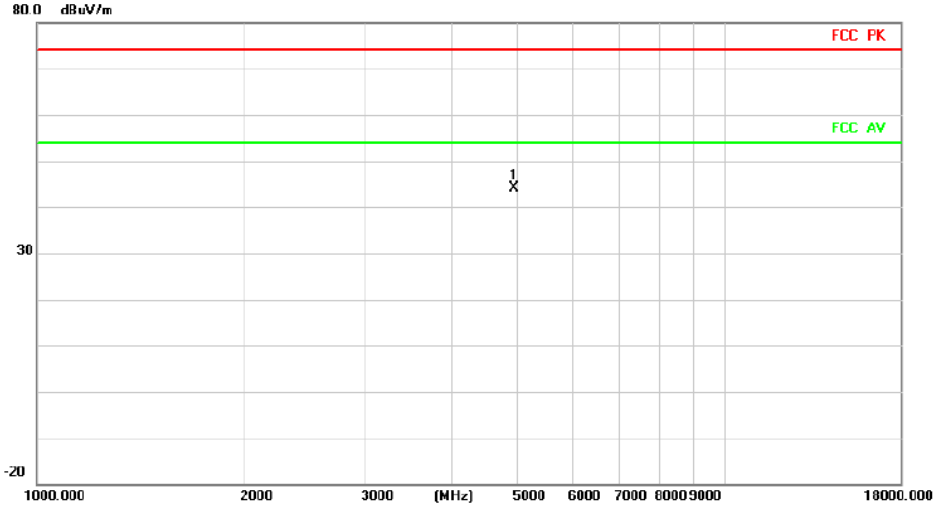

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	34.06	10.00	44.06	74.00	-29.94	peak

Radiated Emission

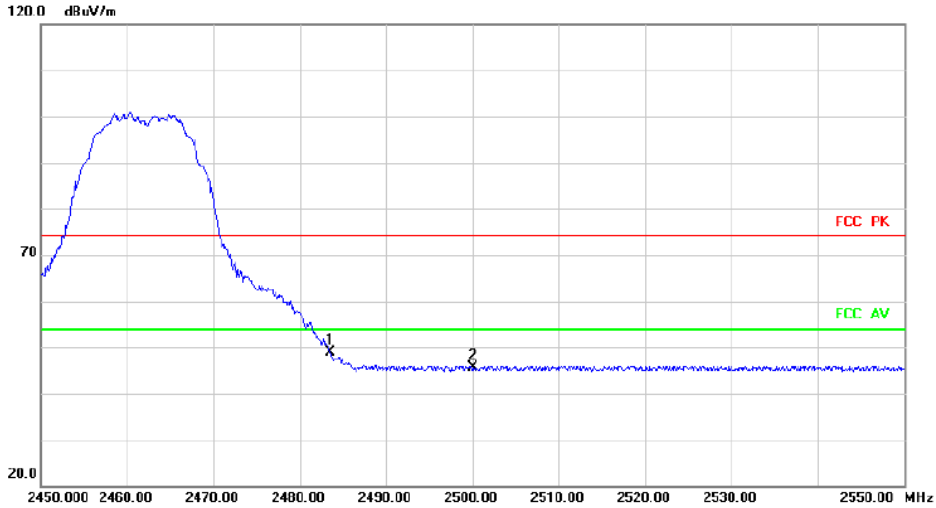

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	47.71	1.09	48.80	74.00	-25.20	peak
2		2500.000	44.46	1.22	45.68	74.00	-28.32	peak

Above 1G (1GHz~18GHz)	Test mode:11G	Test Channel:1

VERTICAL

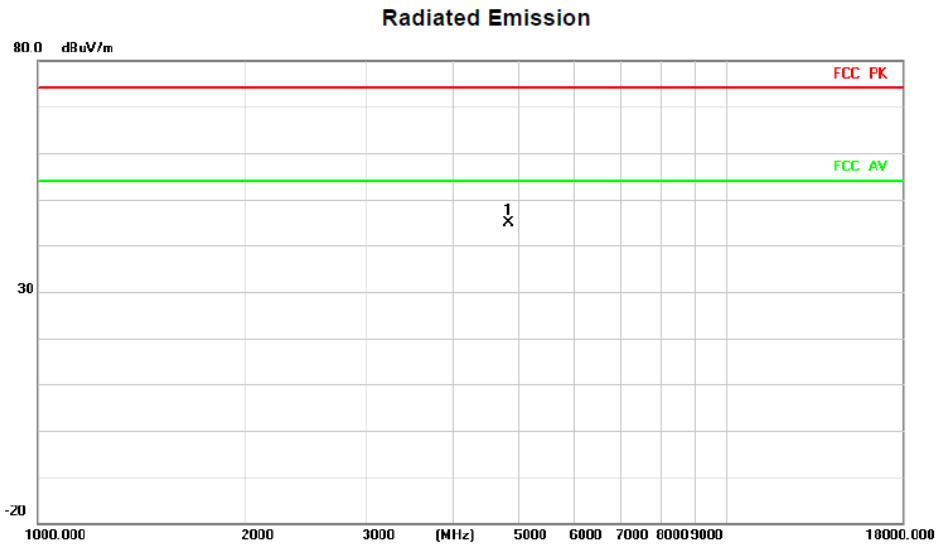

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	34.87	10.00	44.87	74.00	-29.13	peak

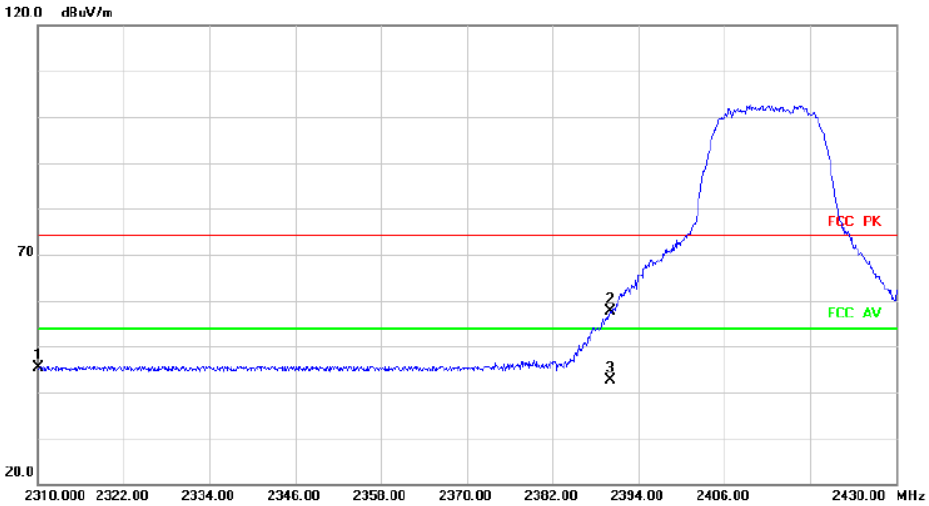

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	45.18	0.19	45.37	74.00	-28.63	peak
2		2390.000	57.20	0.41	57.61	74.00	-16.39	peak
3	*	2390.000	42.18	0.41	42.59	54.00	-11.41	AVG

HORIZONTA

Radiated Emission

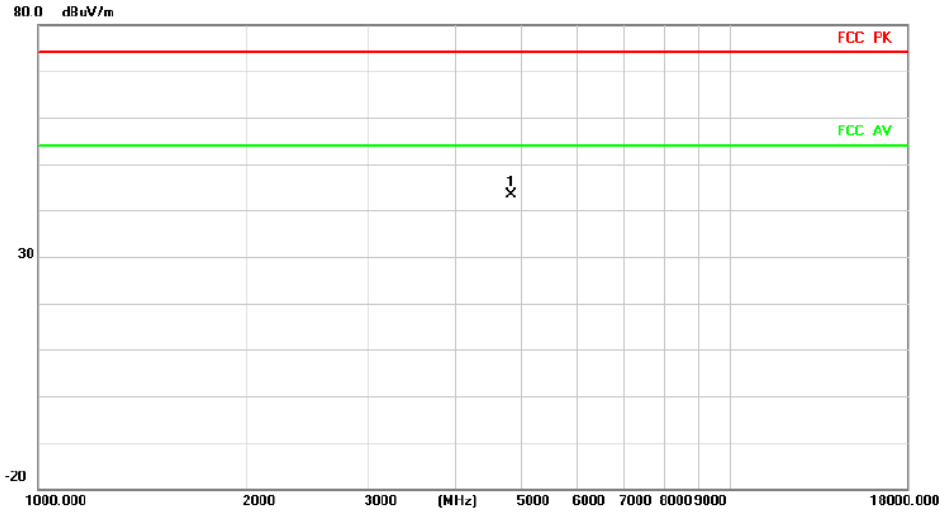

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	33.40	10.00	43.40	74.00	-30.60	peak

Radiated Emission

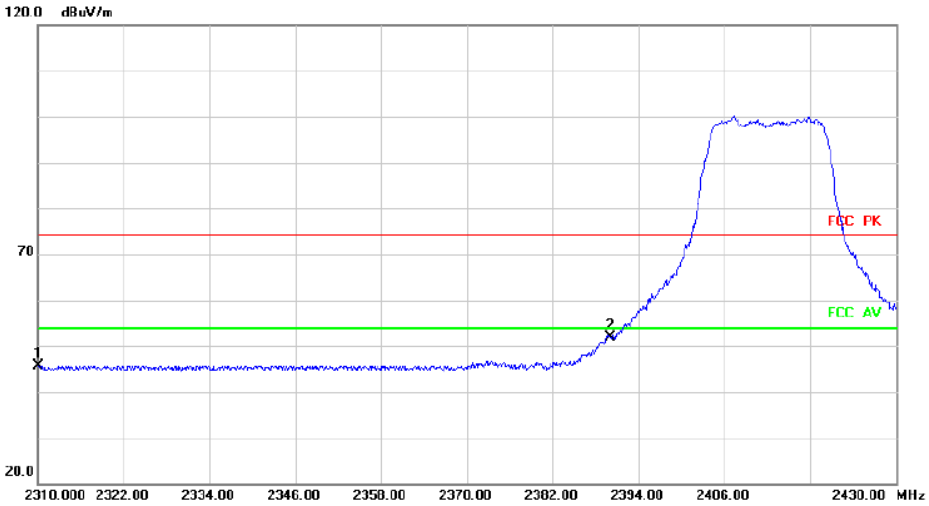

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	45.46	0.19	45.65	74.00	-28.35	peak
2	*	2390.000	51.36	0.41	51.77	74.00	-22.23	peak

Above 1G (1GHz~18GHz)	Test mode:11G	Test Channel:6

VERTICAL

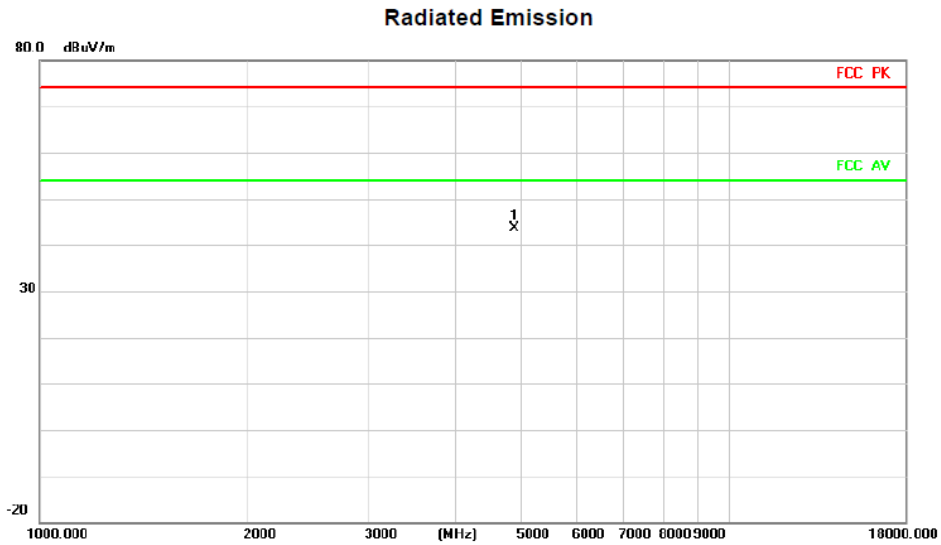

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	33.59	10.00	43.59	74.00	-30.41	peak

HORIZONTA

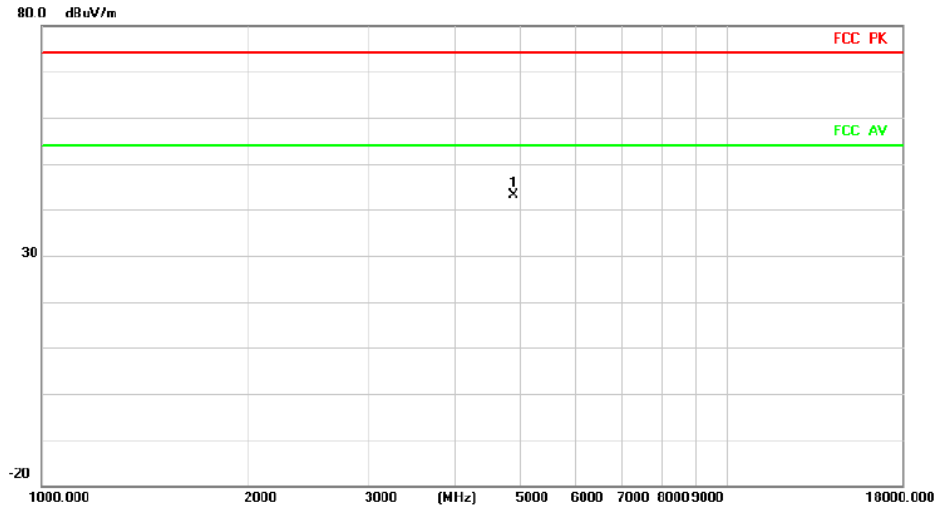

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	33.08	10.00	43.08	74.00	-30.92	peak

Above 1G (1GHz~18GHz)	Test mode: 11G	Test Channel:11

VERTICAL

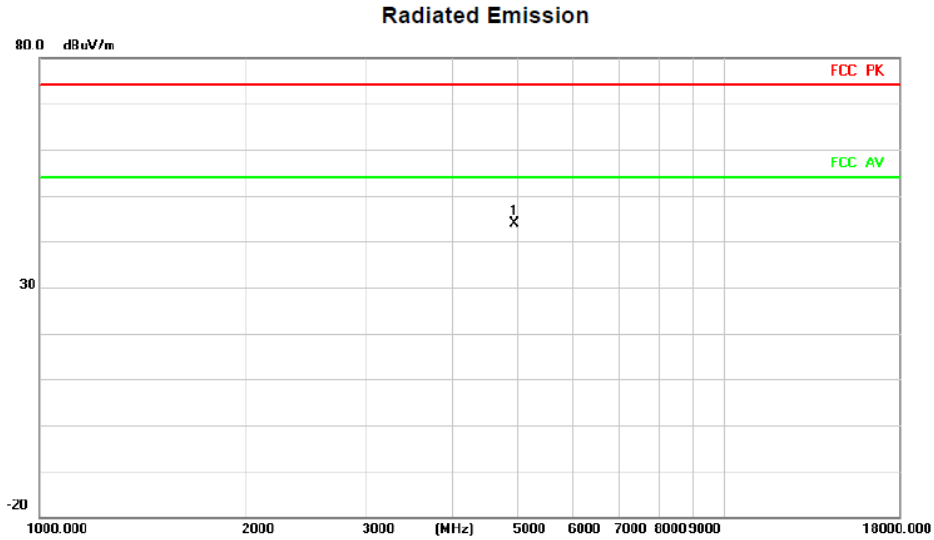

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	33.94	10.00	43.94	74.00	-30.06	peak

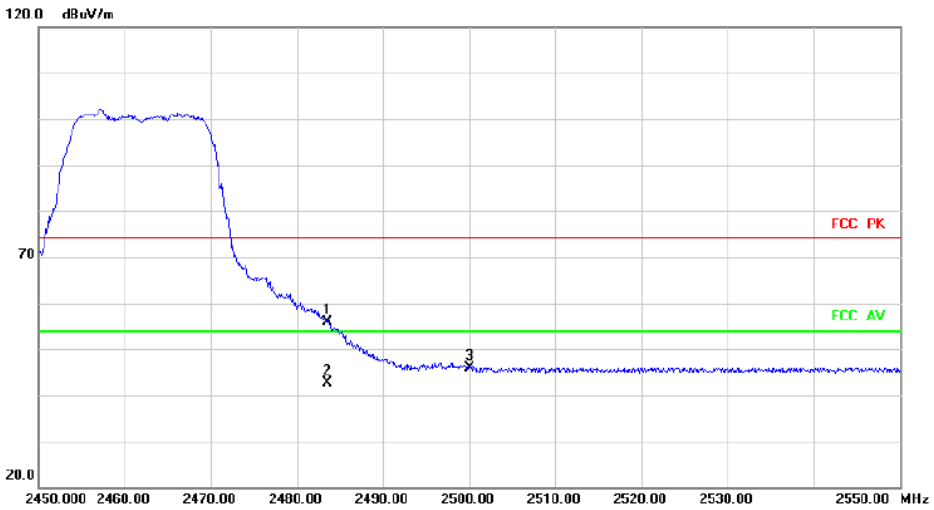

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.500	54.87	1.09	55.96	74.00	-18.04	peak
2	*	2483.500	41.48	1.09	42.57	54.00	-11.43	AVG
3		2500.000	44.57	1.22	45.79	74.00	-28.21	peak

HORIZONTA

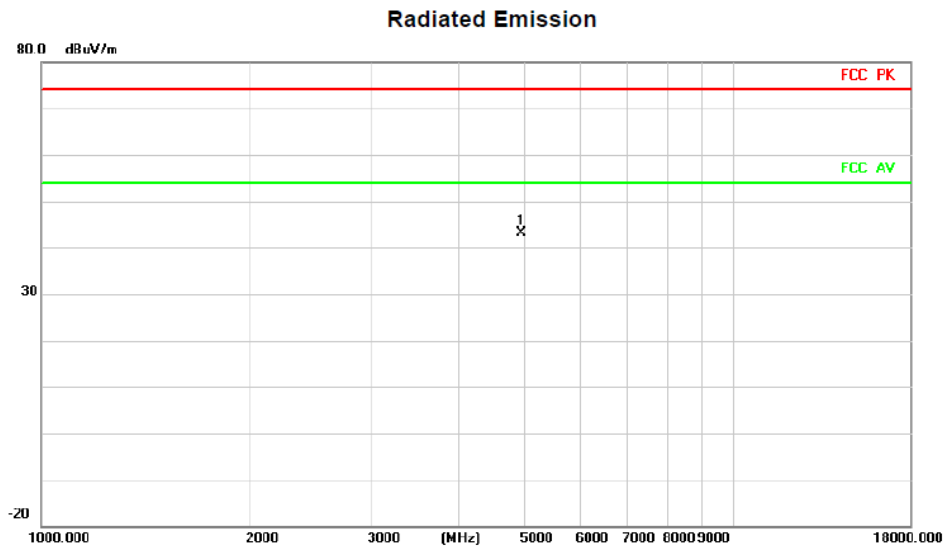

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	33.16	10.00	43.16	74.00	-30.84	peak

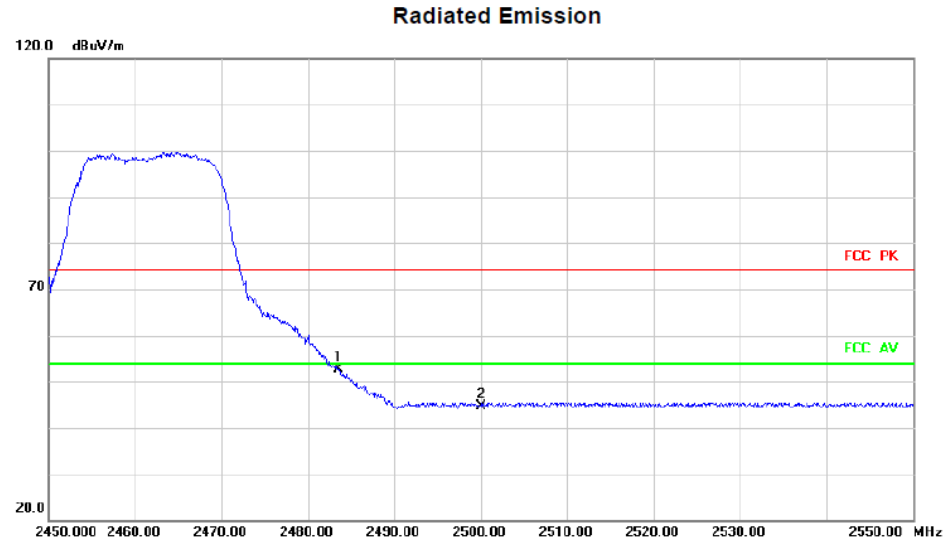

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	51.63	1.09	52.72	74.00	-21.28	peak
2		2500.000	43.49	1.22	44.71	74.00	-29.29	peak

Above 1G (1GHz~18GHz)	Test mode: 11N20SISO	Test Channel:1

VERTICAL

Radiated Emission

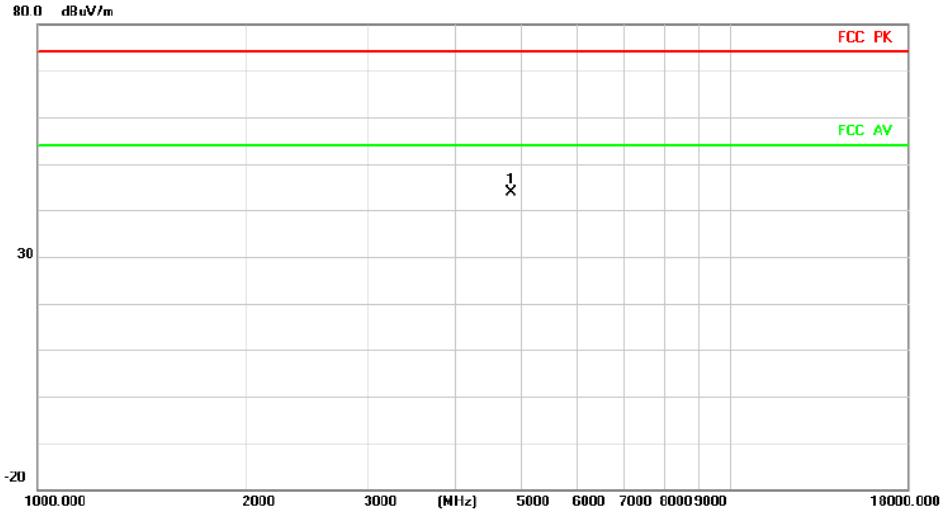

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	33.85	10.00	43.85	74.00	-30.15	peak

Radiated Emission

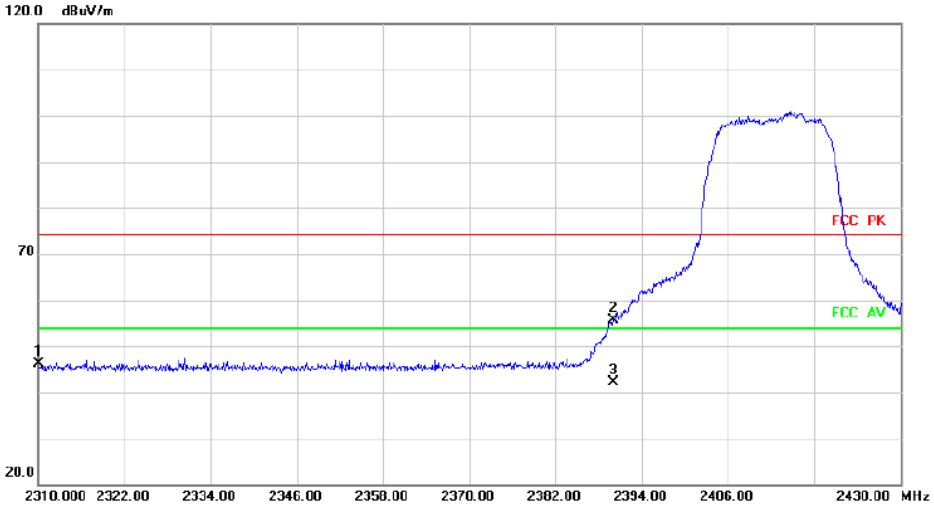

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	46.04	0.19	46.23	74.00	-27.77	peak
2		2390.000	55.17	0.41	55.58	74.00	-18.42	peak
3	*	2390.000	41.70	0.41	42.11	54.00	-11.89	AVG

HORIZONTA

Radiated Emission

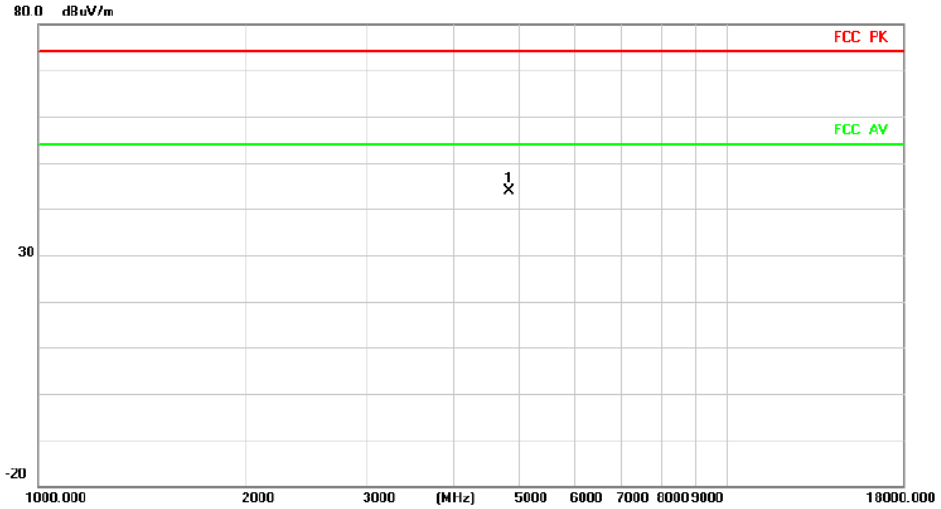

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4824.000	33.77	10.00	43.77	74.00	-30.23	peak

Radiated Emission

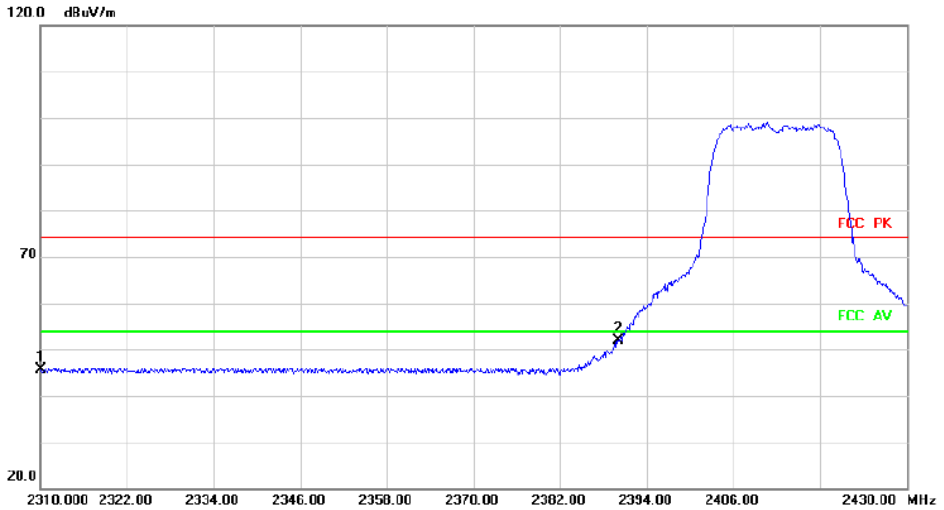

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	45.54	0.19	45.73	74.00	-28.27	peak
2	*	2390.000	51.57	0.41	51.98	74.00	-22.02	peak

Above 1G (1GHz~18GHz)	Test mode:11N20SISO	Test Channel:6

VERTICAL

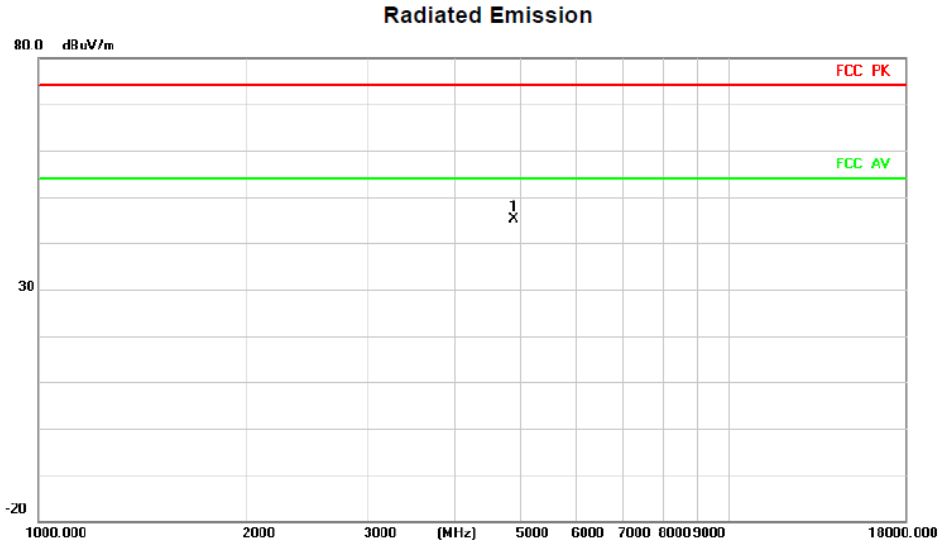

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	35.18	10.00	45.18	74.00	-28.82	peak

HORIZONTA

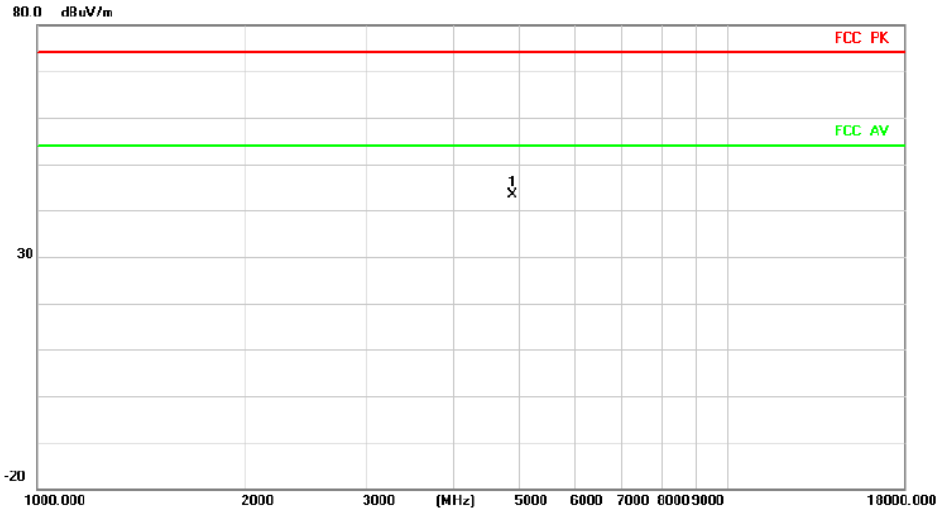

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.000	33.47	10.00	43.47	74.00	-30.53	peak

Above 1G (1GHz~18GHz)	Test mode: 11N20SISO	Test Channel:11

VERTICAL

Radiated Emission

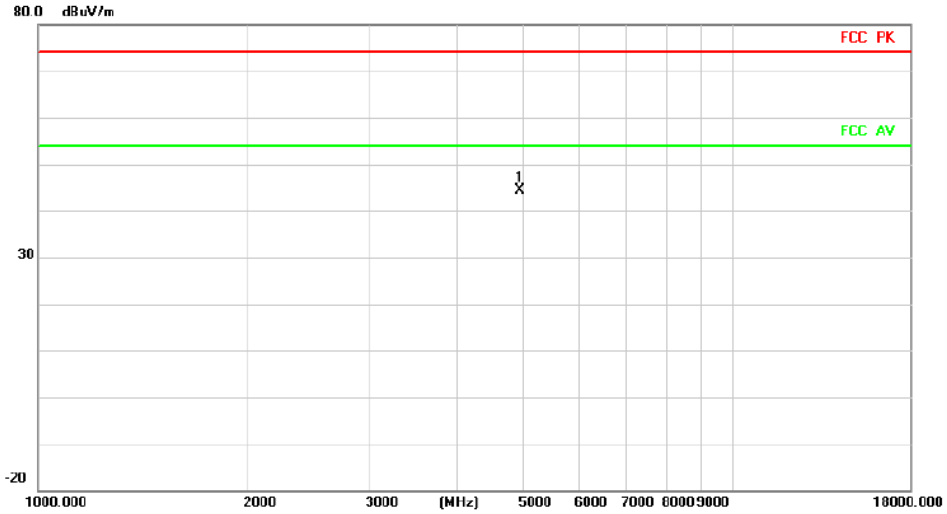

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	34.46	10.00	44.46	74.00	-29.54	peak

Radiated Emission

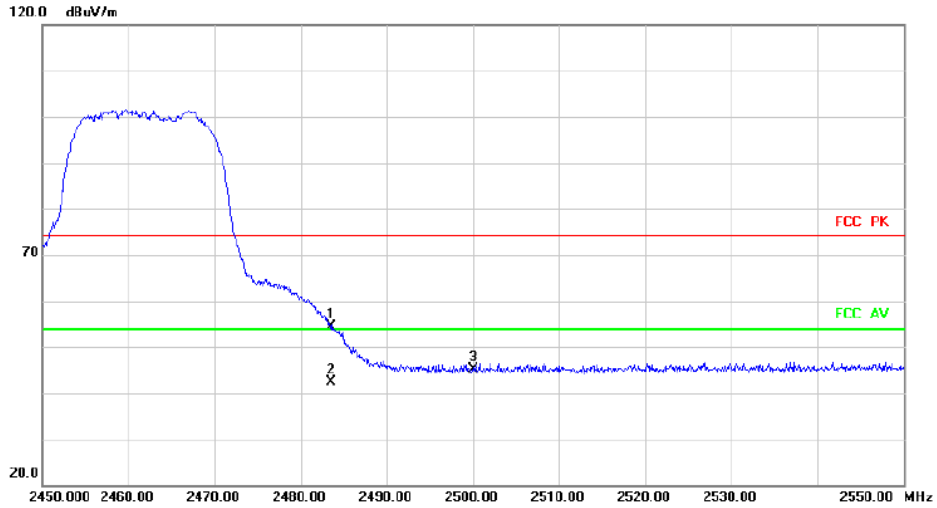

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.500	53.35	1.09	54.44	74.00	-19.56	peak
2	*	2483.500	41.29	1.09	42.38	54.00	-11.62	AVG
3		2500.000	43.83	1.22	45.05	74.00	-28.95	peak

HORIZONTA

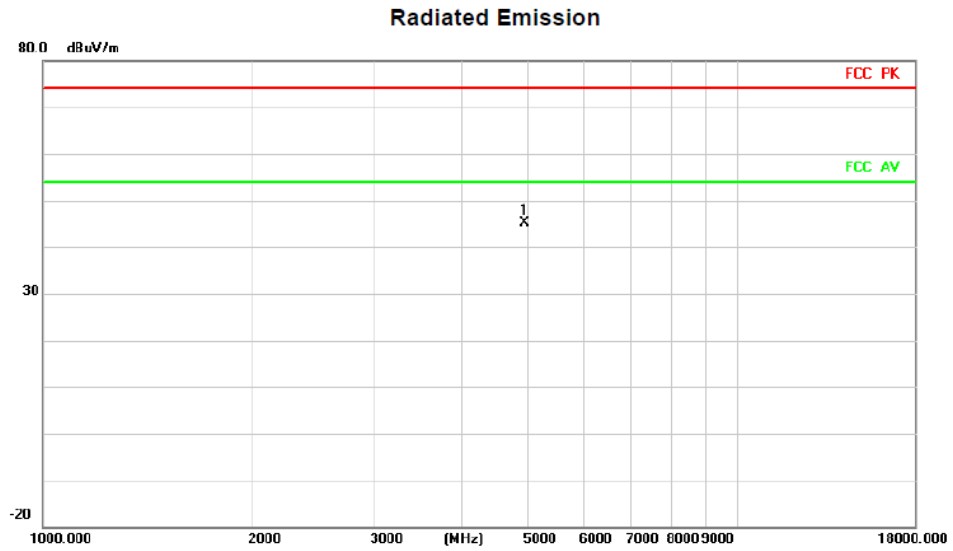

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.000	35.01	10.00	45.01	74.00	-28.99	peak

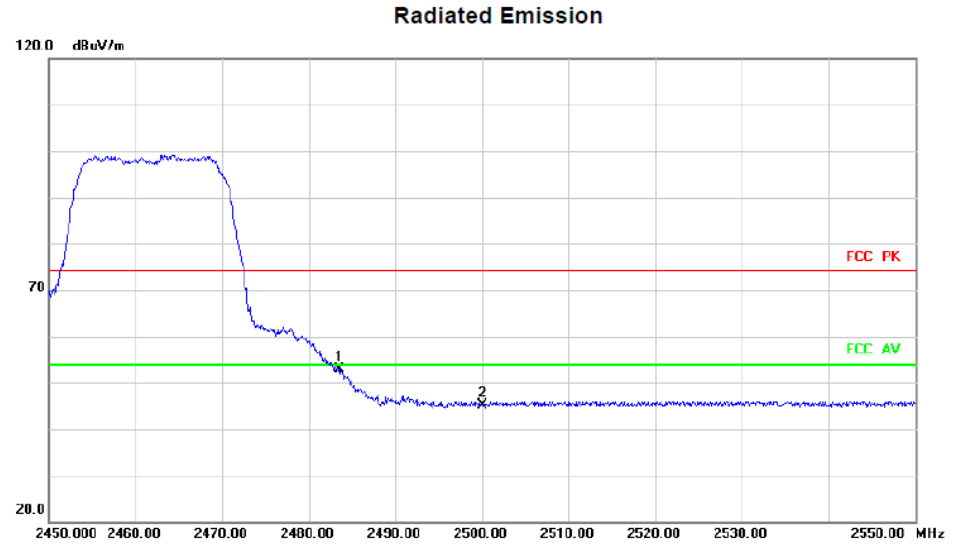

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	51.84	1.09	52.93	74.00	-21.07	peak
2		2500.000	43.87	1.22	45.09	74.00	-28.91	peak

The high frequency, which started from 18GHz to 25GHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

3.3 Spurious Emission at Antenna Port

3.3.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

3.3.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
● Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

a) The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.

b) Spectrum Setting as below:

Centre Frequency	The centre frequency of the channel under test
Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3 Test Setup

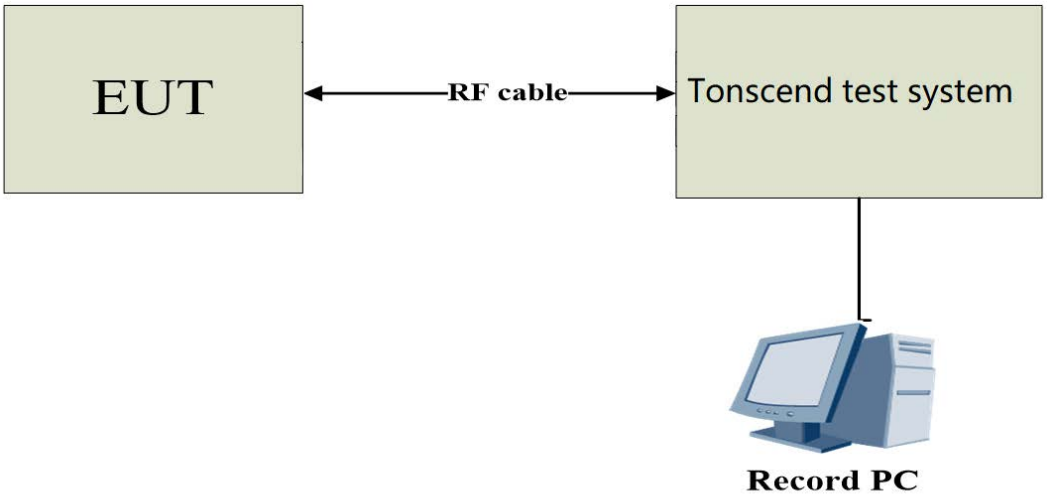

3.3.4 The Result

Conducted Spurious Emission

11B_Ant1_2412_0~Reference

11B_Ant1_2412_30~1000
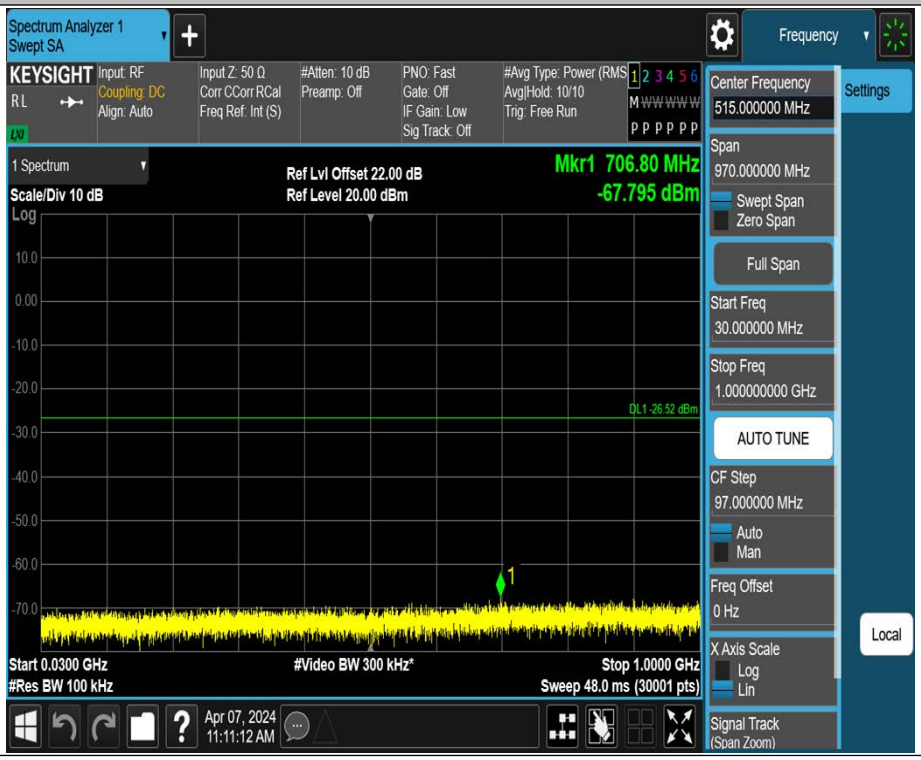

11B_Ant1_2412_1000~26500

11B_Ant1_2437_0~Reference

11B_Ant1_2437_30~1000

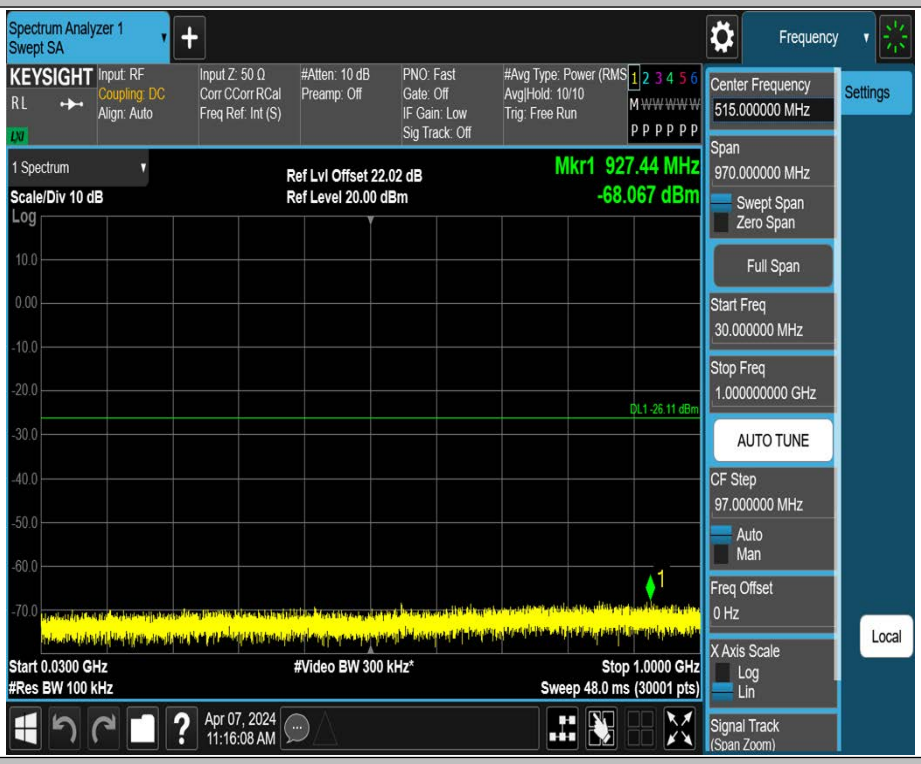

11B_Ant1_2437_1000~26500

11B_Ant1_2462_0~Reference

11B_Ant1_2462_30~1000

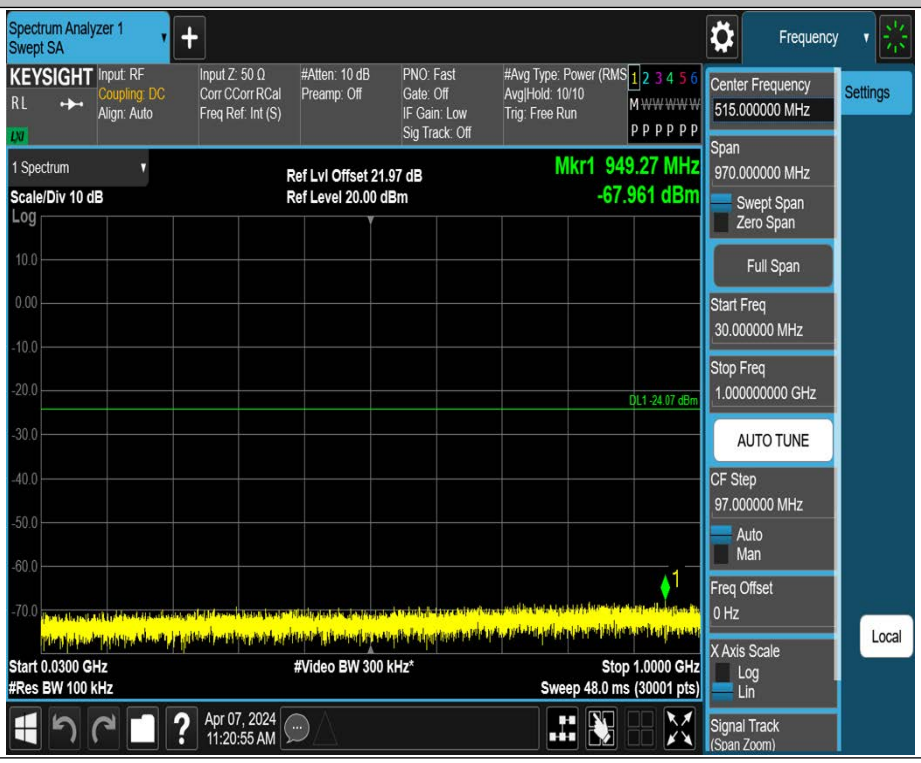

11B_Ant1_2462_1000~26500

11G_Ant1_2412_0~Reference

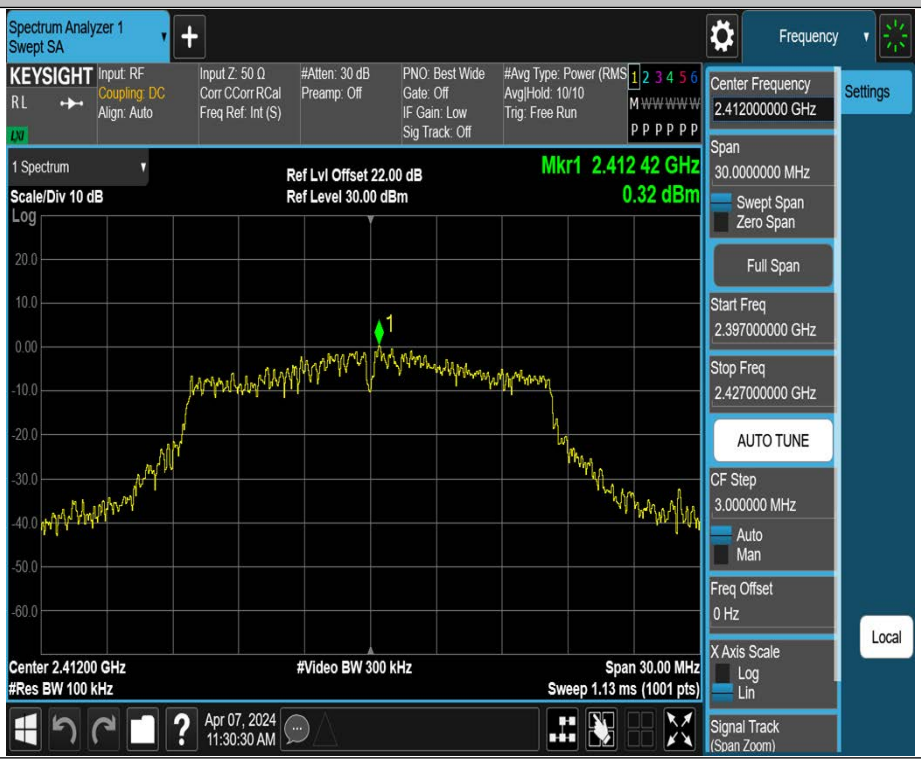

11G_Ant1_2412_30~1000

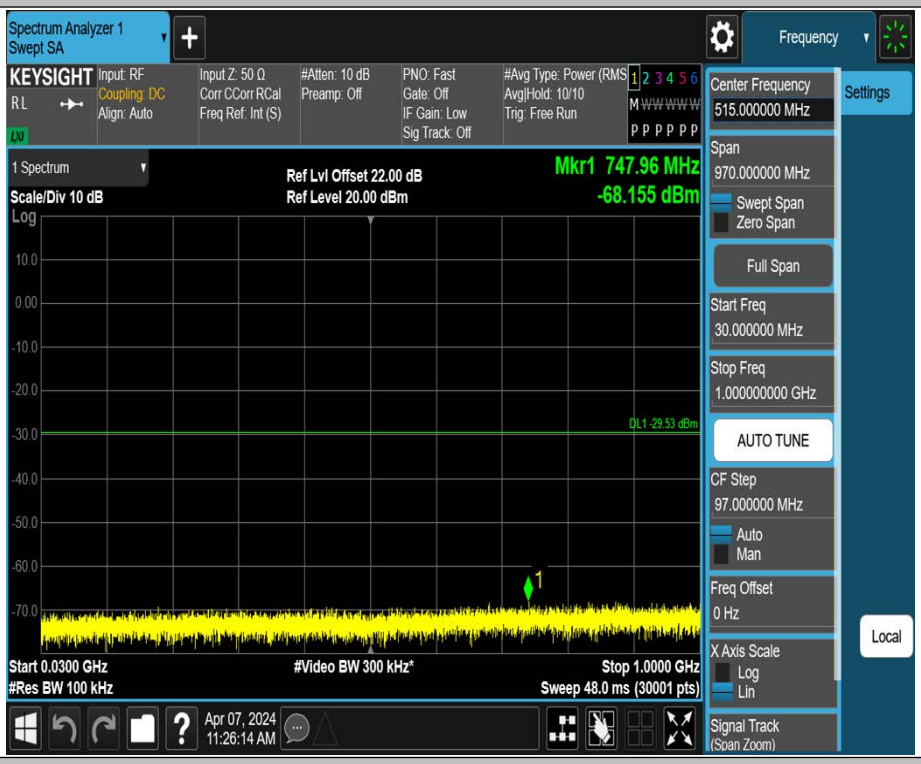

11G_Ant1_2412_1000~26500

11G_Ant1_2437_0~Reference

11G_Ant1_2437_30~1000

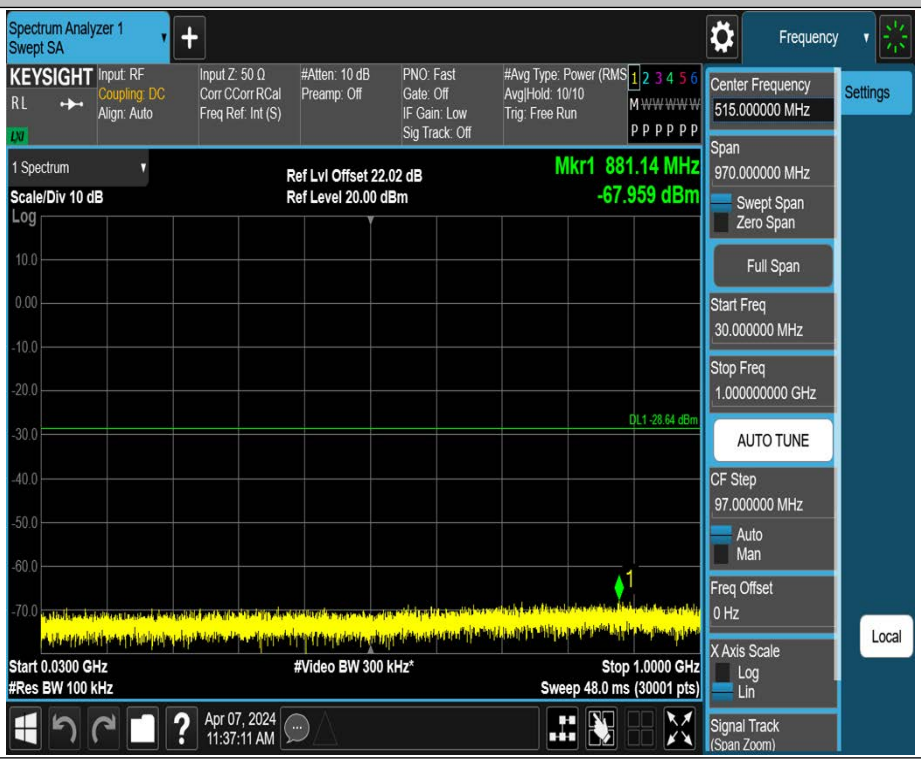

11G_Ant1_2437_1000~26500

11G_Ant1_2462_0~Reference

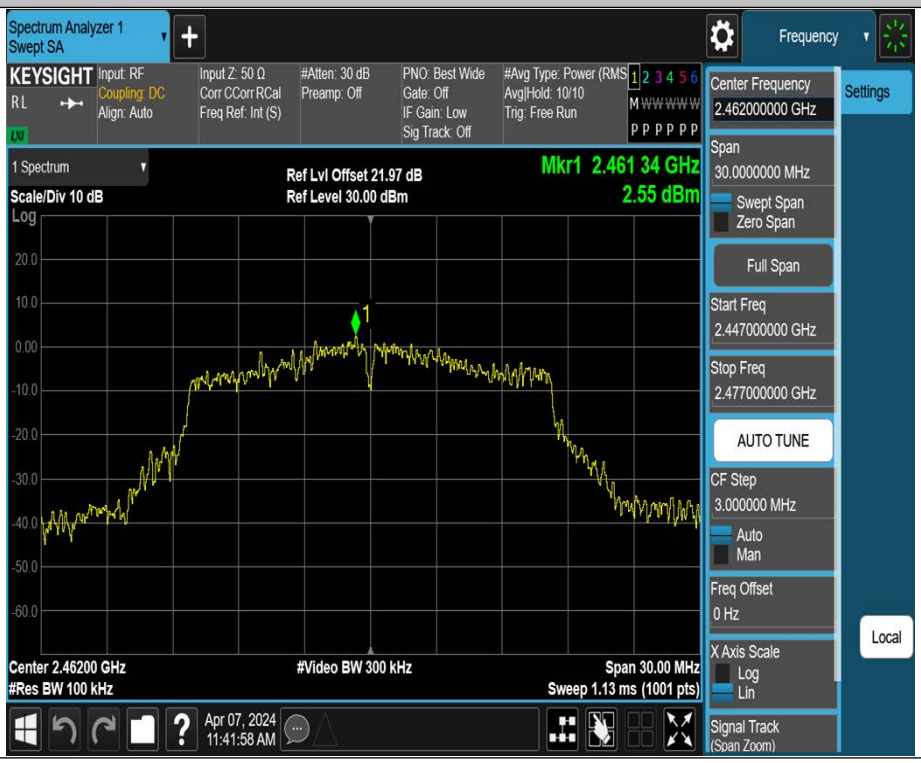

11G_Ant1_2462_30~1000

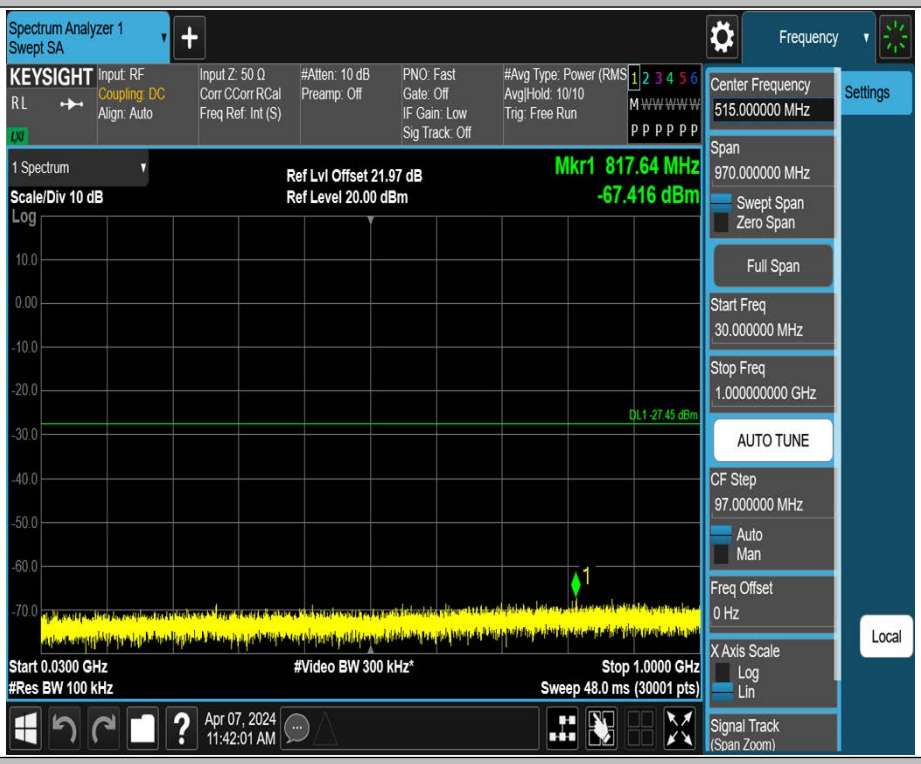

11G_Ant1_2462_1000~26500

11N20SISO_Ant1_2412_0~Reference

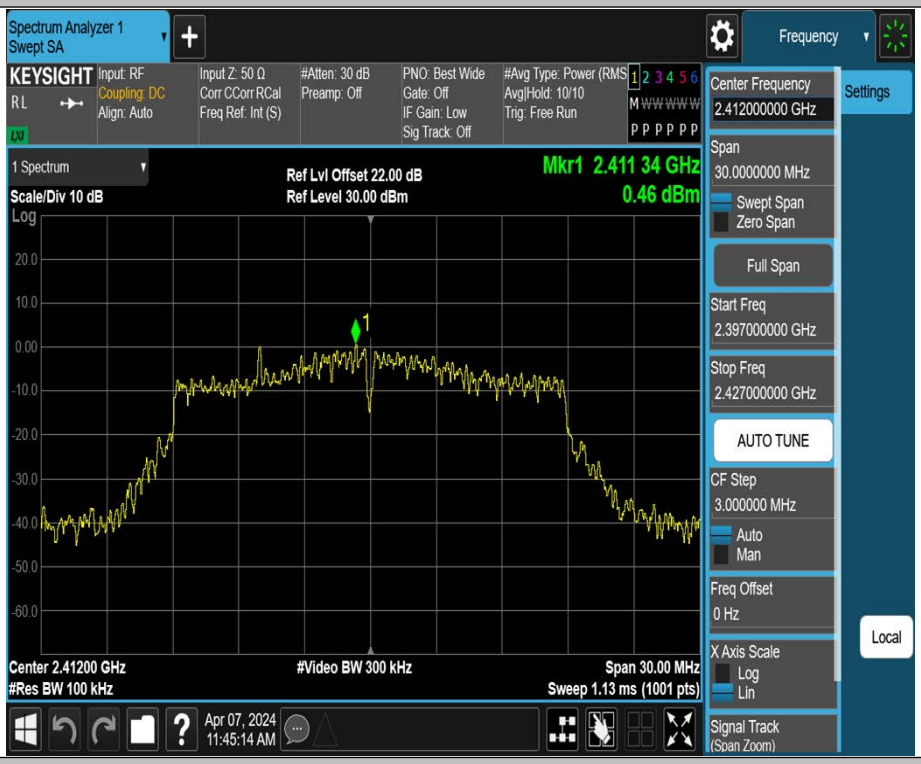

11N20SISO_Ant1_2412_30~1000

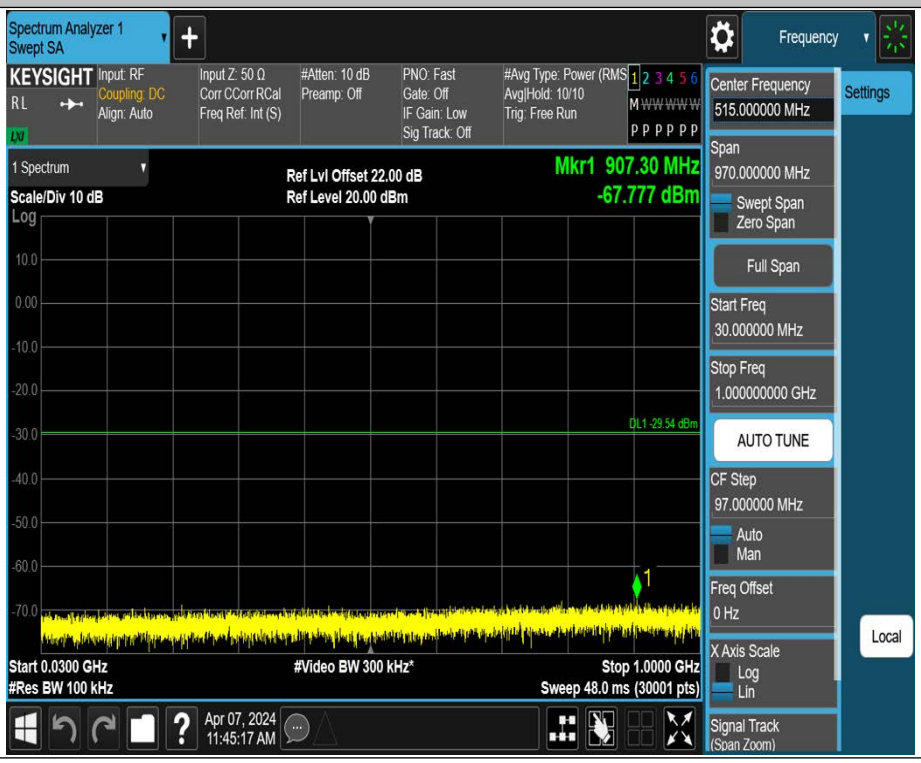

11N20SISO_Ant1_2412_1000~26500

11N20SISO_Ant1_2437_0~Reference

11N20SISO_Ant1_2437_30~1000

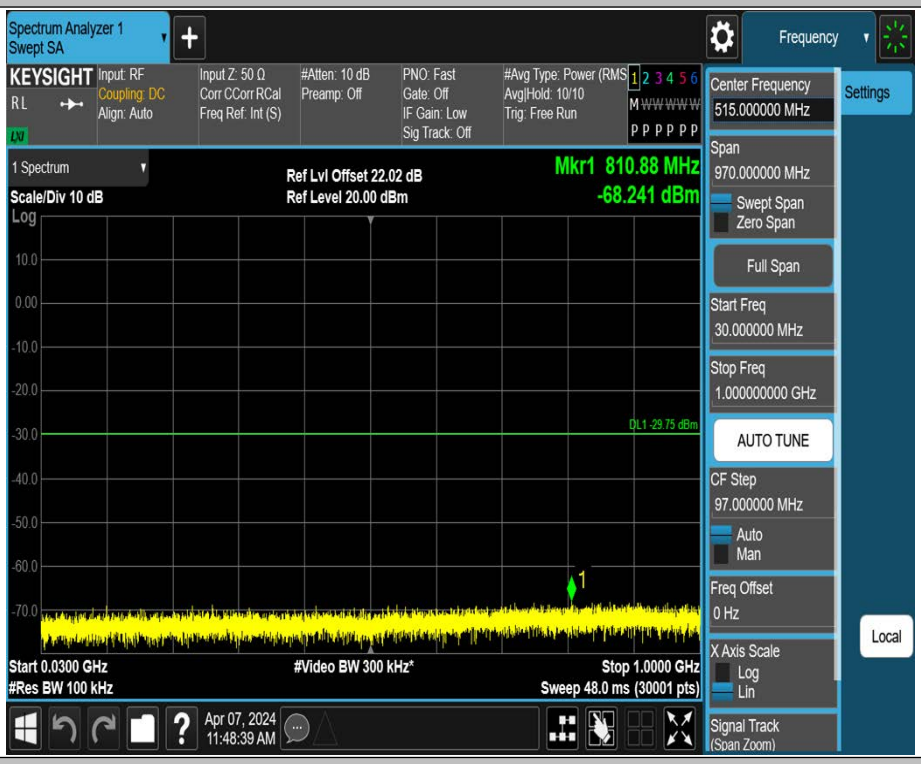

11N20SISO_Ant1_2437_1000~26500