



FCC Radio Test Report

FCC ID: ZNPWD-R3601U

This report concerns: Original Grant

Project No. : 2606C215
Equipment : BE3600 WIFI7 Dual Band Wi-Fi Range Extender
Brand Name : N/A
Model Name : WD-R3601U, WD-R3602U, WD-R3601N, WD-R3602N
Applicant : Shenzhen Century Xinyang Tech Co., Ltd
Address : 3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong,China
Manufacturer : Shenzhen Century Xinyang Tech Co., Ltd
Address : 3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong,China
Factory : Shenzhen Century Xinyang Tech Co., Ltd
Address : 3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong,China
Date of Receipt : Jun. 24, 2026
Date of Test : Jun. 25, 2026 ~ Aug. 07, 2026
Issued Date : Sep. 01, 2026
Test Sample : Engineering Sample No.: DG92026062460 for conducted, DG92026062459 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Parker Yang
 Parker Yang

Approved by : Chay Cai
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	13
3.3 PARAMETERS OF TEST SOFTWARE	15
3.4 DUTY CYCLE	16
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
3.6 SUPPORT UNITS	18
3.7 CUSTOMER INFORMATION DESCRIPTION	18
4 . AC POWER LINE CONDUCTED EMISSIONS	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS	20
5 . RADIATED EMISSIONS	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	23
5.4 TEST SETUP	23
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	25
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	25
5.8 TEST RESULTS - ABOVE 1000 MHZ	25
6 . BANDWIDTH	26
6.1 LIMIT	26

Table of Contents	Page
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . MAXIMUM OUTPUT POWER	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	30
8.5 EUT OPERATION CONDITIONS	30
8.6 TEST RESULTS	30
9 . FREQUENCY STABILITY	31
9.1 LIMIT	31
9.2 TEST PROCEDURE	31
9.3 DEVIATION FROM STANDARD	31
9.4 TEST SETUP	31
9.5 EUT OPERATION CONDITIONS	31
9.6 TEST RESULTS	31
10 . MEASUREMENT INSTRUMENTS LIST	32
11 . EUT TEST PHOTOS	35
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	41
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	44
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	49
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	52

Table of Contents	Page
APPENDIX E - BANDWIDTH	89
APPENDIX F - MAXIMUM OUTPUT POWER	98
APPENDIX G - POWER SPECTRAL DENSITY	107
APPENDIX H - FREQUENCY STABILITY	124

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2606C215	R00	Original Report.	Sep. 01, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☒ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (1m)	CISPR	18 ~ 26.5 GHz	4.30
		26.5 ~ 40 GHz	4.74

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.8 dB
Frequency Stability	1.4 ppm
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	53%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9kHz to 30MHz	24°C	48%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -30MHz to 1000MHz	23°C	51%	AC 120V/60Hz	Torin Long
Radiated Emissions -Above 1000 MHz	23°C	50%	AC 120V/60Hz	Jensen Zhou Torin Long
Bandwidth	26-27°C	49-51%	AC 120V/60Hz	Jensen Zhou
Maximum Output Power	23-25°C	45-52%	AC 120V/60Hz	Brand Duan Arvin Tong
Power Spectral Density	26-27°C	49-51%	AC 120V/60Hz	Jensen Zhou
Frequency Stability	Normal & Extreme	49-51%	Normal & Extreme	Jensen Zhou

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	BE3600 WIFI7 Dual Band Wi-Fi Range Extender
Brand Name	N/A
Test Model	WD-R3601U
Model Name	WD-R3601U, WD-R3602U, WD-R3601N, WD-R3602N
Model Difference(s)	The casing is different.
Hardware Version	WD536BE V2.1
Software Version	RE536BE031225V1.02
Power Source	AC Mains.
Power Rating	100-240V~ 50/60Hz
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 450 Mbps IEEE 802.11ac: up to 1300 Mbps IEEE 802.11ax: up to 1801.5 Mbps IEEE 802.11be: up to 2163 Mbps
Maximum Output Power _UNII-1	IEEE 802.11be(EHT40): 19.14 dBm (0.0820 W)
Maximum Output Power _UNII-3	IEEE 802.11be(EHT80): 21.44 dBm (0.1392 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		NB5800-Z5108A 105-GBX	PCB	N/A	5.95
2		NB5800-Z5108A 105-GBX	PCB	N/A	5.95
3		NB5800-Z5108A 105-GBX	PCB	N/A	5.95

Note:

- 1) This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=5.95.

For power spectral density measurements, $N_{ANT}=3$, $N_{SS}=1$.

So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 5.95 + 10\log(3/1)\text{dBi} = 10.72$.

Then, the UNII-1 power spectral density limit is $17 - (10.72 - 6) = 12.28$, the UNII-3 power spectral density limit is $30 - (10.72 - 6) = 25.28$.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	3TX
IEEE 802.11a		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2 + Ant. 3)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX BE(EHT80) Mode Channel 155 (UNII-3)
Mode 9	TX BE(EHT80) Mode Channel 155 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 9	TX BE(EHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 9	TX BE(EHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX BE(EHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX BE(EHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX BE(EHT80) Mode Channel 155(UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.
- (6) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is recorded.
- (7) EHT20/EHT40/EHT80 covers HT20/HT40, VHT20/VHT40/VHT80 and HE20/HE40/HE80, due to same modulation (in full RU). The power setting for 802.11n HT20/HT40, 802.11ac VHT20/VHT40/VHT80 and 802.11ax HE20/HE40/HE80 are the same or lower than 802.11be EHT20/EHT40/EHT80.
- (8) EUT supports multiple different placement methods. The assessment tested different placement methods, and the worst case is recorded.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	QATool_Dbg.exe		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	11	11	10.5
IEEE 802.11be(EHT20)	12.5	12.5	12
Frequency (MHz)	5190	5230	
IEEE 802.11be(EHT40)	15	14	
Frequency (MHz)	5210		
IEEE 802.11be(EHT80)	12		

UNII-3			
Test Software Version	QATool_Dbg.exe		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	15	15	15
IEEE 802.11be(EHT20)	9.5	10	9.5
Frequency (MHz)	5755	5795	
IEEE 802.11be(EHT40)	11	11.5	
Frequency (MHz)	5775		
IEEE 802.11be(EHT80)	17		

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.
The power spectral density = measured power spectral density + duty factor.

Duty cycle = 0.349 ms / 0.401 ms = 87.03%
Duty Factor = 10 log(1/Duty cycle) = 0.60 dB

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 719 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2747 Hz (Duty cycle < 98%).


For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2747 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2865 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

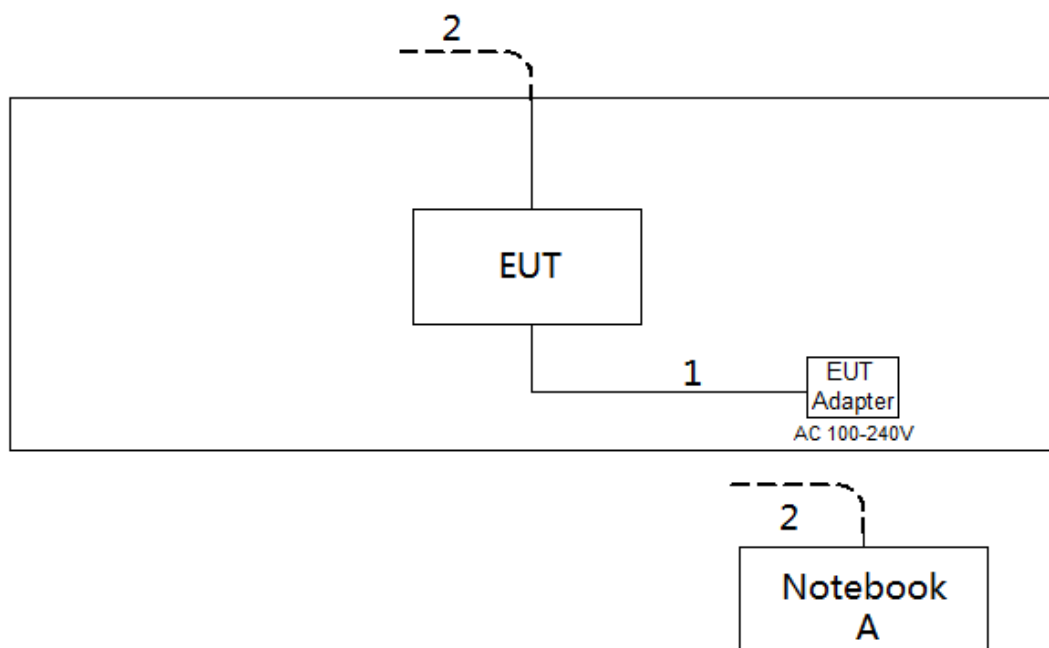

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	ThinkBook 15 G3 ITL	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

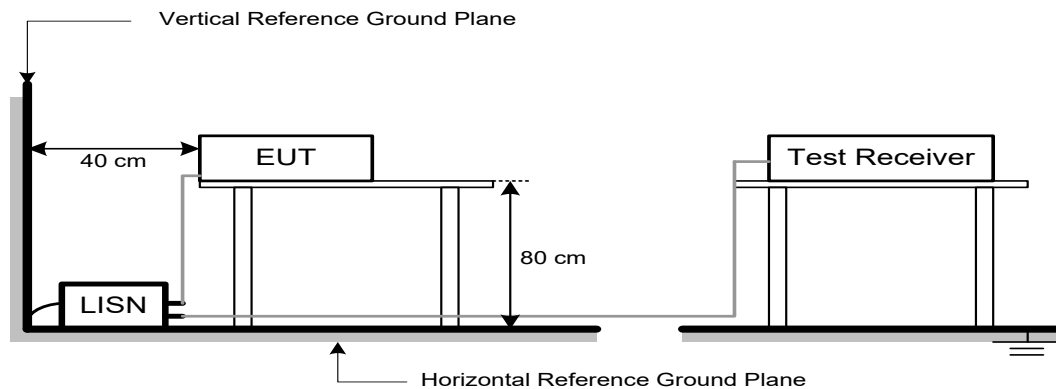

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

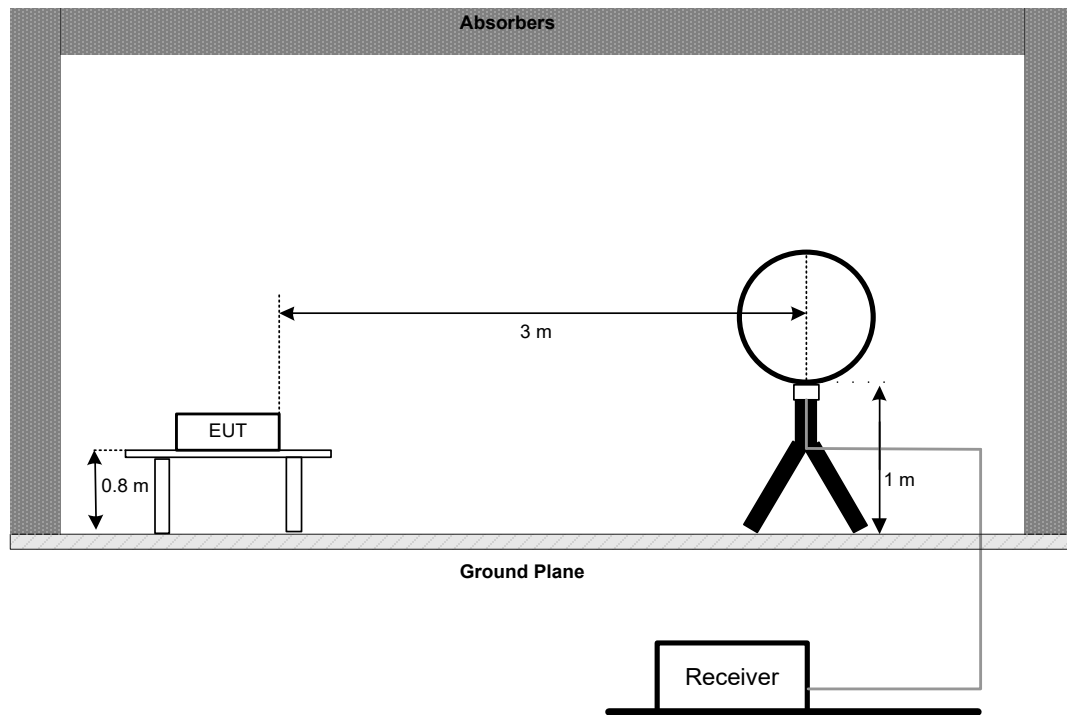


30 MHz to 1 GHz

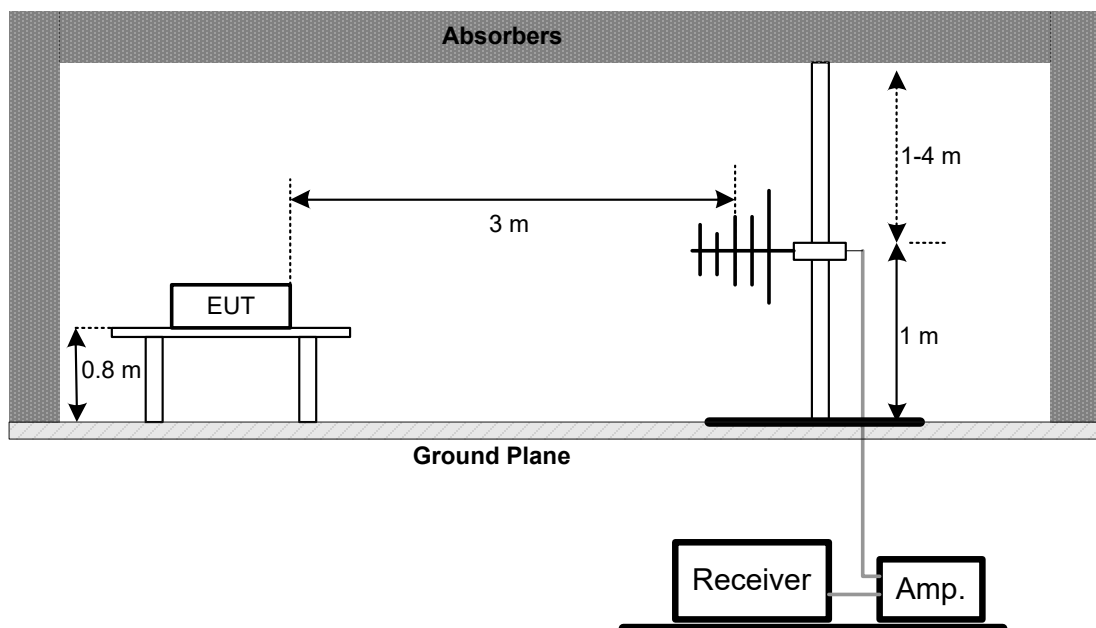

Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)

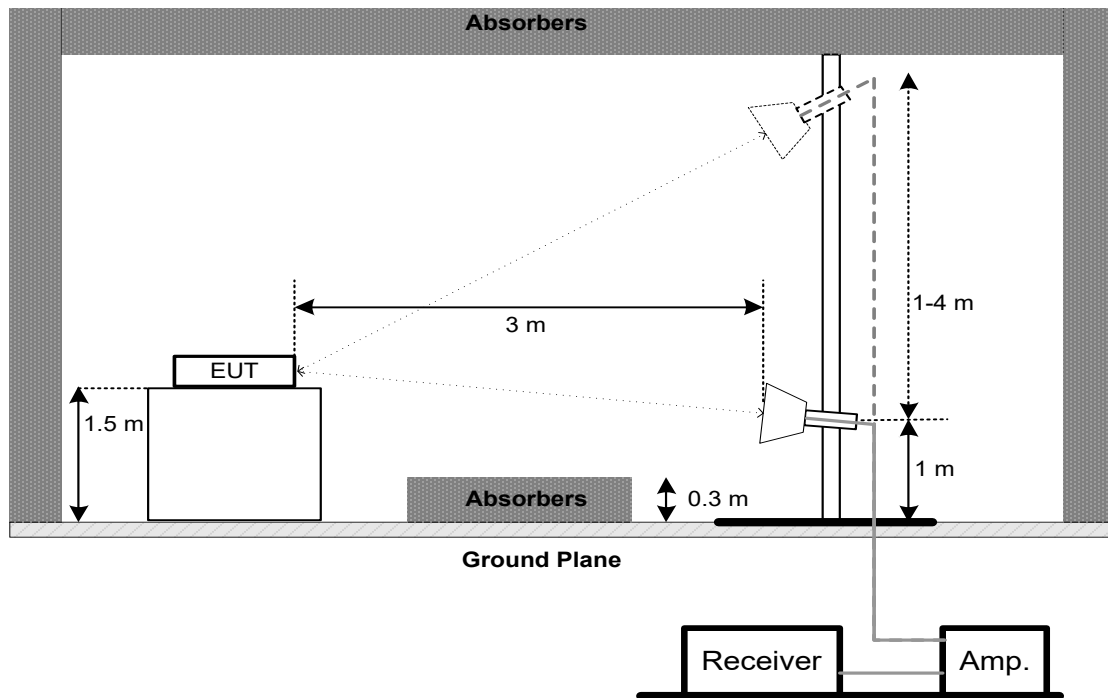

Harmonic(18 GHz to 40 GHz)

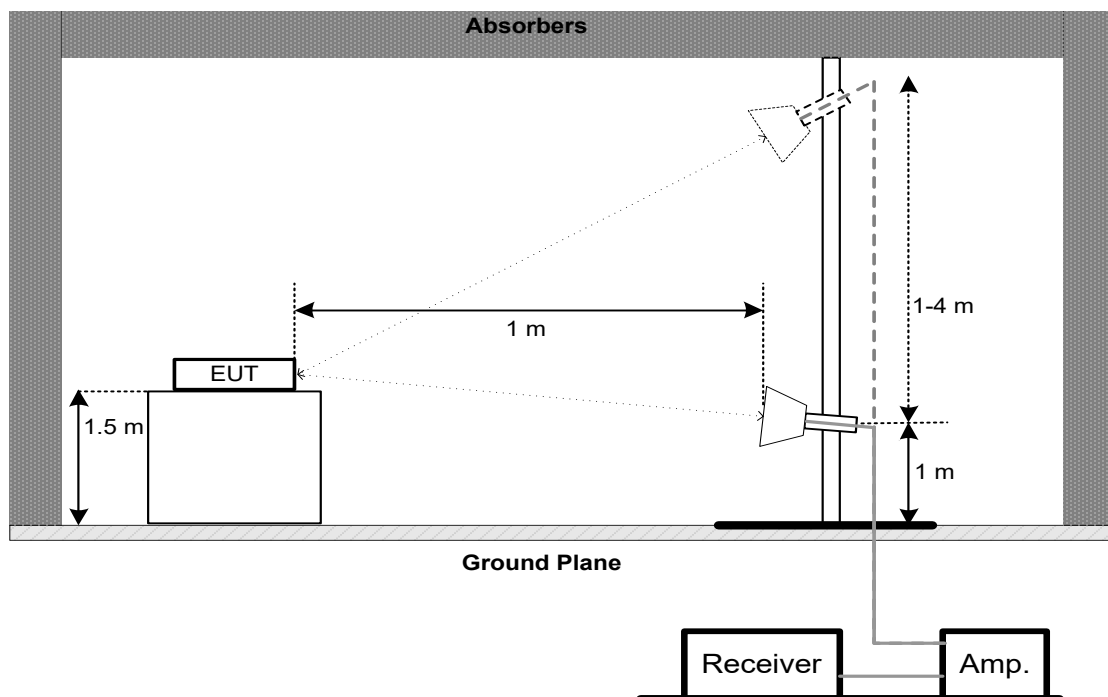

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	-	5150-5250
FCC 15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

- b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

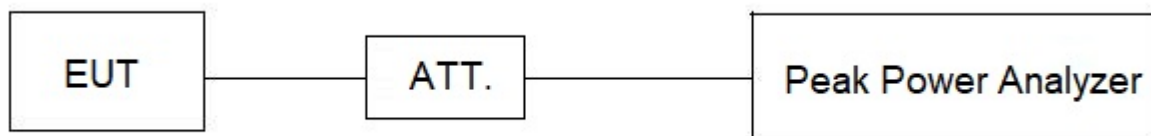

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 6.99 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

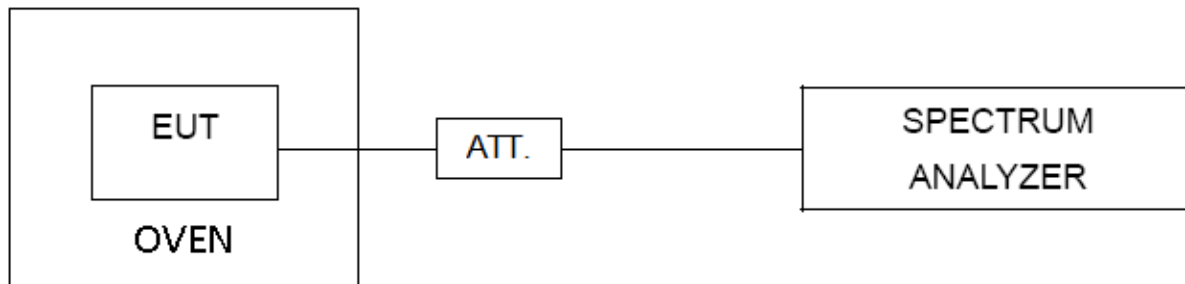

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Jul. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Jul. 15, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 14, 2027
2	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 22, 2027
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 22, 2027
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 14, 2027

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Jul. 17, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Apr. 25, 2027
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	May 17, 2027
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	May 17, 2027
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	May 17, 2027
7	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Positioning Controller	MF	MF-7802	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
11	966 Chamber room	CM	9*6*6	N/A	May 14, 2027

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Jul. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
3	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 03, 2027
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jul. 07, 2027
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jul. 07, 2027
6	Cable	RegalWay	RWLP50-4.0A-NM RASM-0.8M	N/A	Jul. 07, 2027
7	966 Chamber room	CM	9*6*6	N/A	May 14, 2027
8	Attenuator	RegalWay	RWA-201-S-10	N/A	Apr. 25, 2027
9	Filter	STI	STI15-9969	N/A	May 16, 2027
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz (Test Date: Jul. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	Tonscend	HF160-KMKM-0.5M	N/A	Oct. 21, 2026
2	Cable	Tonscend	HF160-KMKM-5M	N/A	Oct. 21, 2026
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Nov. 21, 2026
4	DRG Horn Antenna	ETS	3116C	218942	Feb. 03, 2027
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EXA Spectrum Analyze	Keysight	N9010A	MY55150209	Oct. 17, 2026
8	966 Chamber room	CM	9*6*6	N/A	May 14, 2027


Bandwidth & Power Spectral Density (Test Date: Jul. 08, 2026 ~ Aug. 05, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyze	R&S	FSP40	100185	Apr. 25, 2027
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	May 16, 2027



Maximum Output Power (Test Date: Jul. 02, 2026 ~ Jul. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Apr. 25, 2027
2	Wideband power sensor	Keysight	N1923A	MY58310004	Apr. 25, 2027
3	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A



Frequency Stability (Test Date: Jul. 08, 2026 ~ Jul. 21, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyze	R&S	FSP40	100185	Apr. 25, 2027
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	May 16, 2027
4	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Dec. 19, 2026
5	AC power source	Preen	AFC-S-1250	F123080107	Nov. 21, 2026



Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

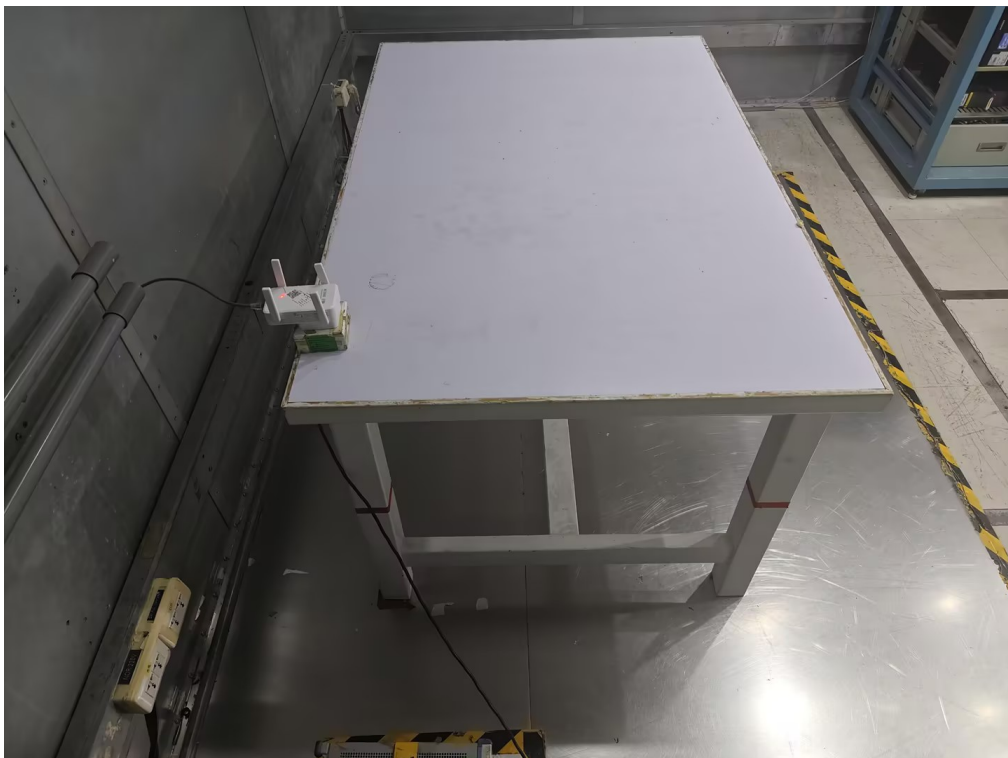11. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

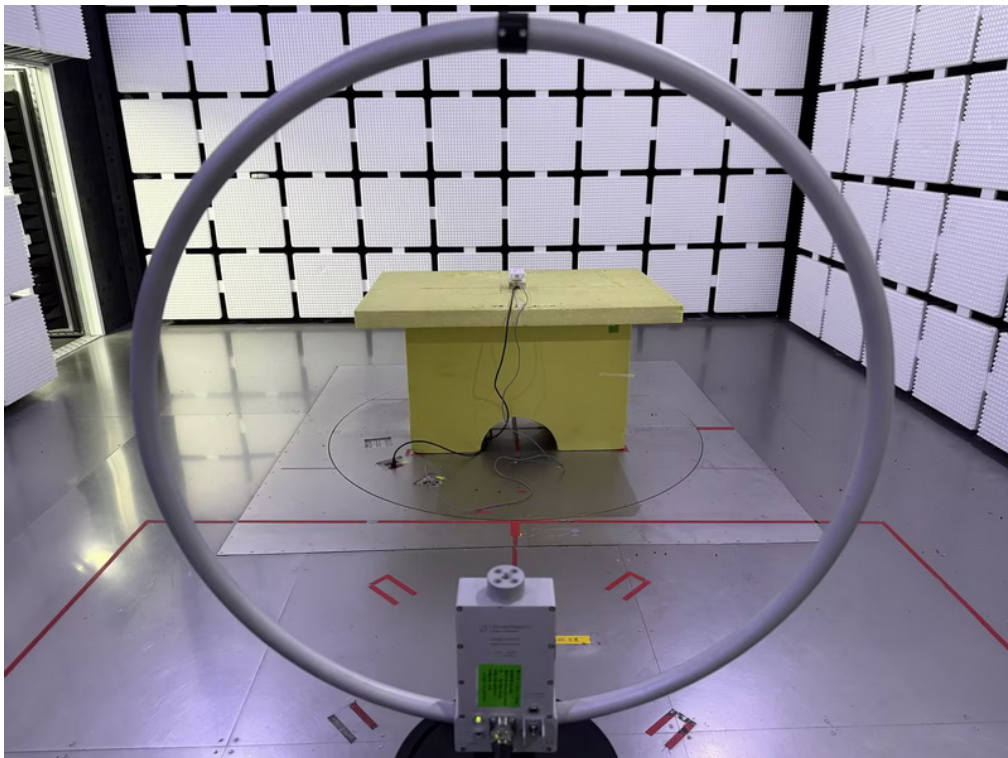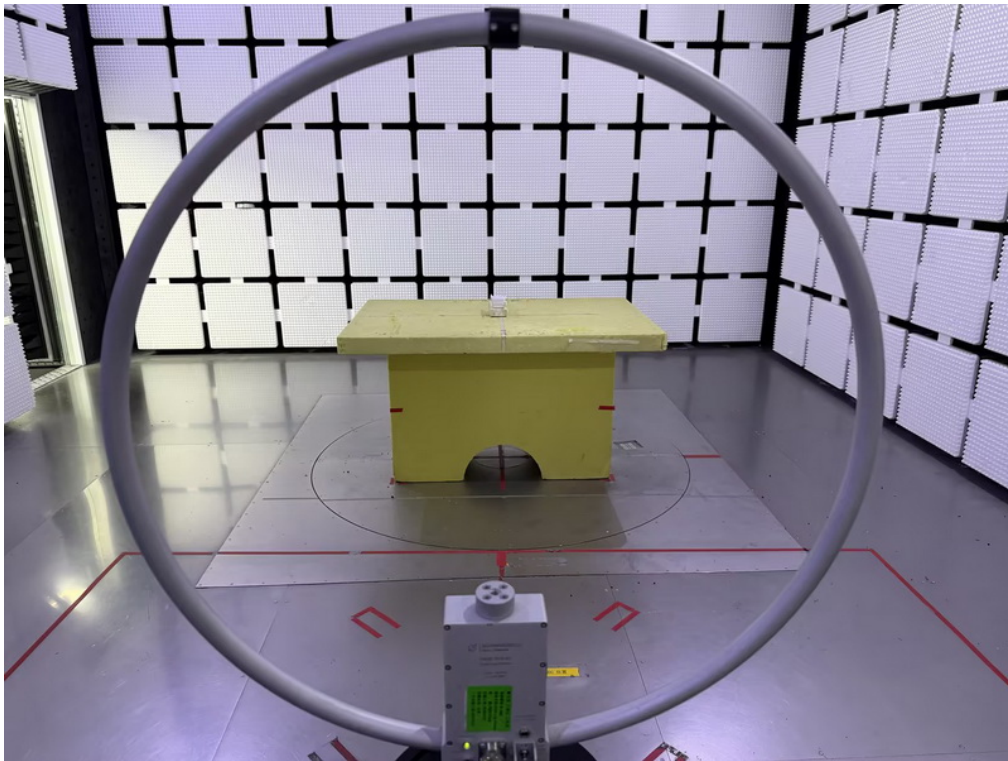
Radiated Emissions Test Photos**9 kHz to 30 MHz**

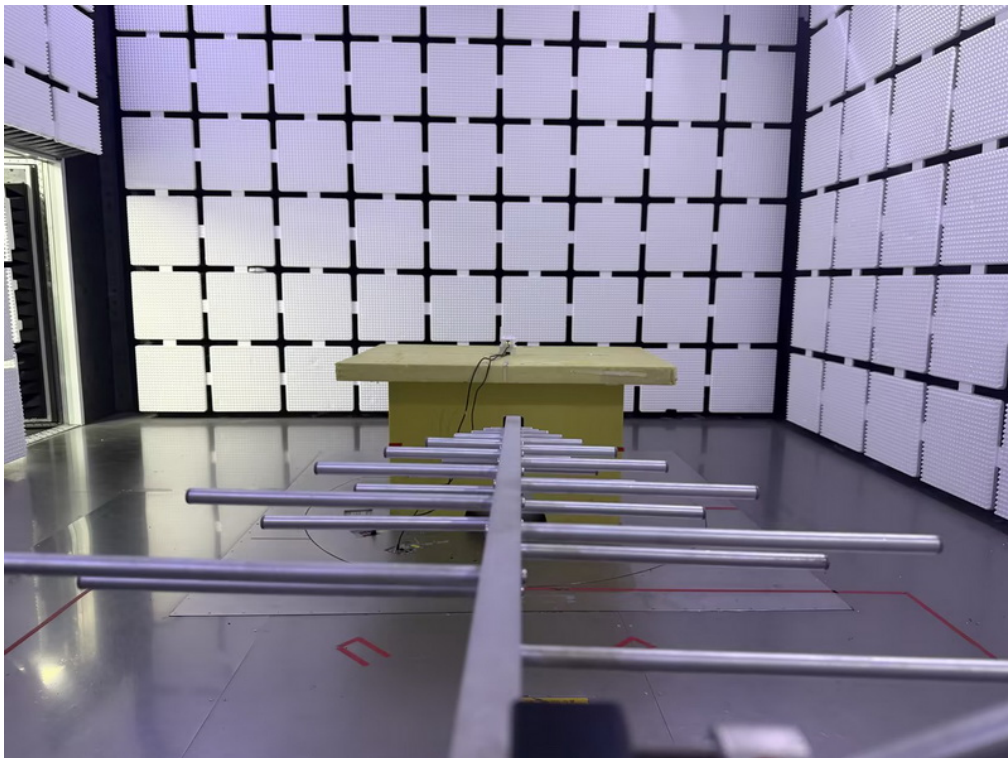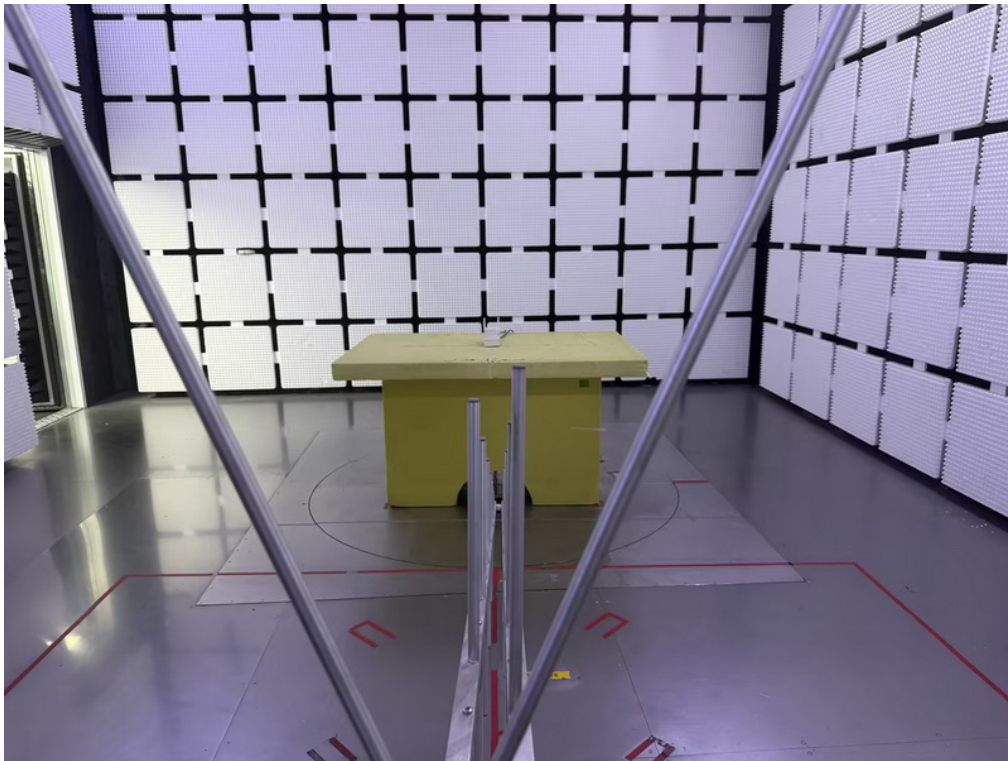Radiated Emissions Test Photos**30 MHz to 1 GHz**

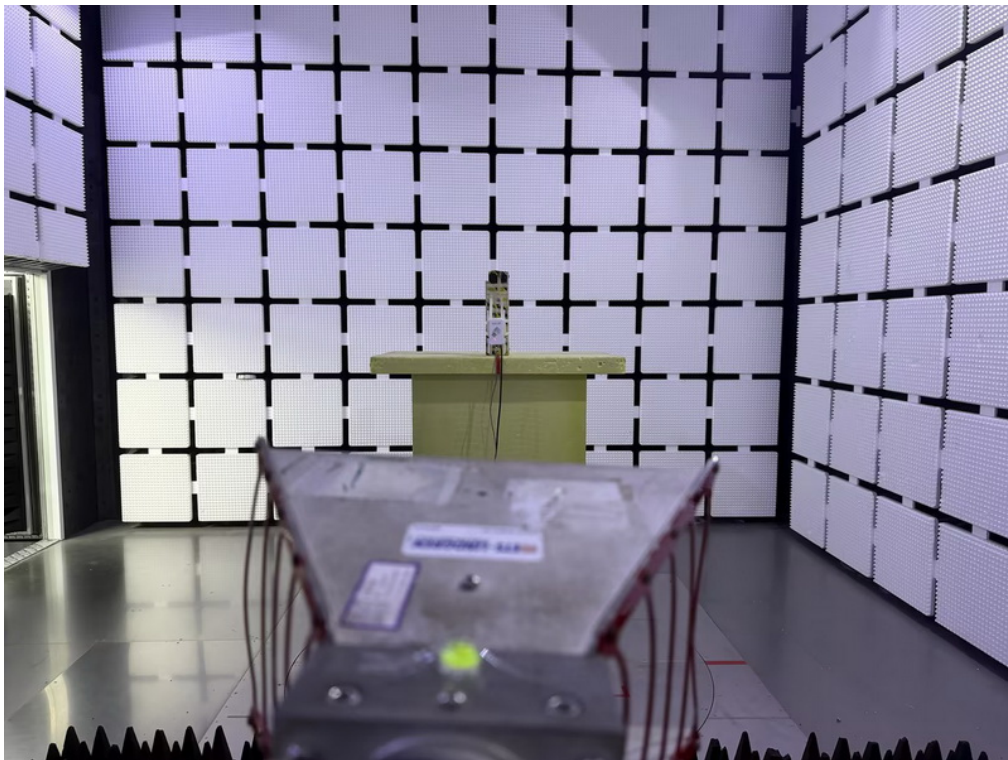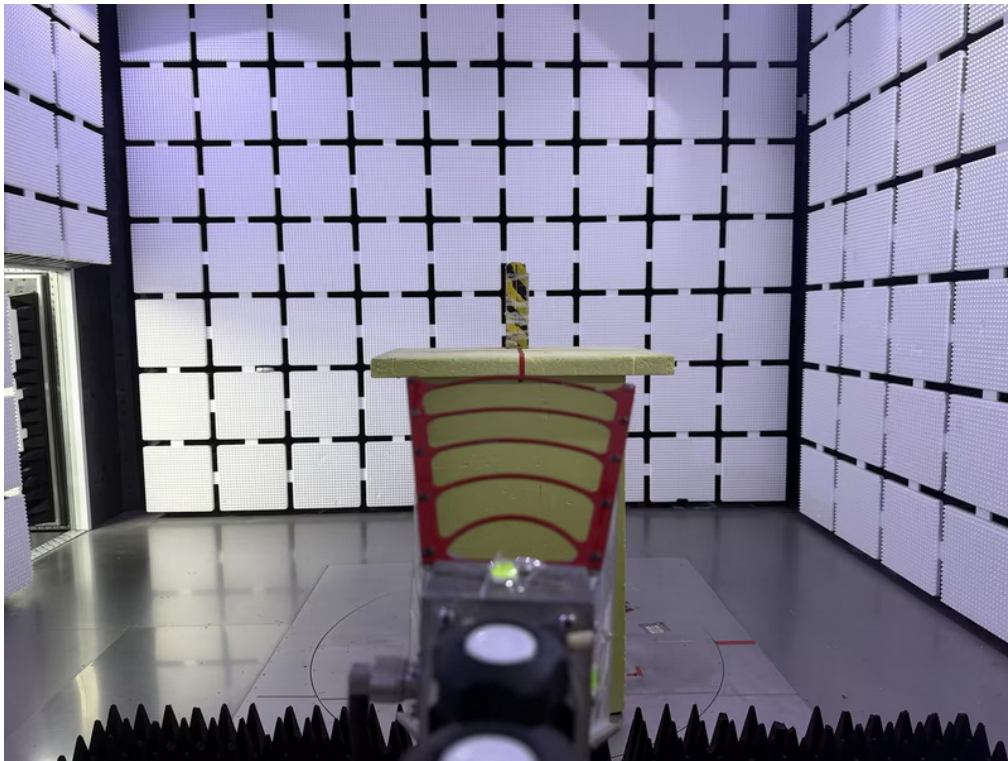Radiated Emissions Test Photos**Band edge & Harmonic(1 GHz to 18 GHz)**

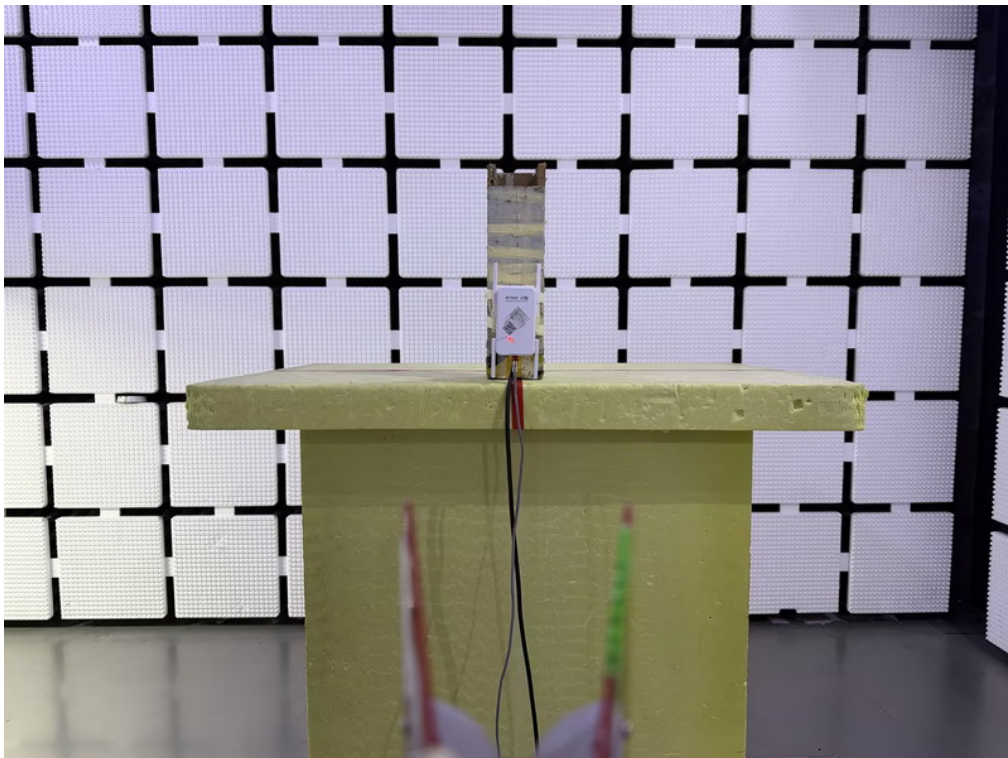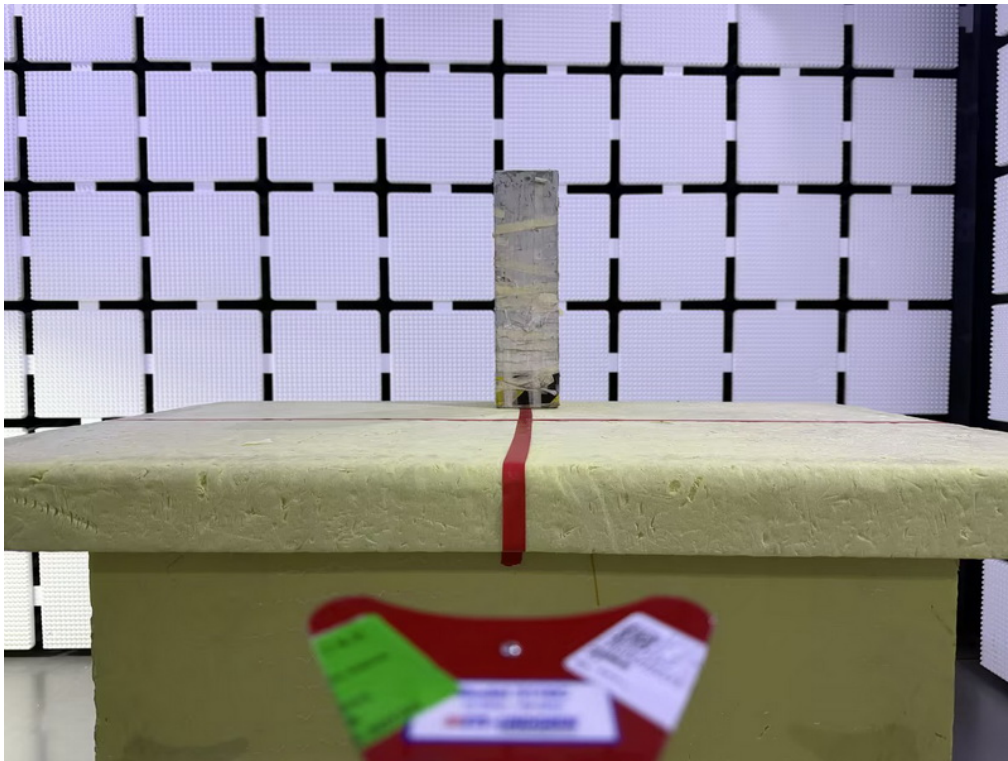
Radiated Emissions Test Photos**Harmonic(18 GHz to 40 GHz)**

Conducted Test Photos

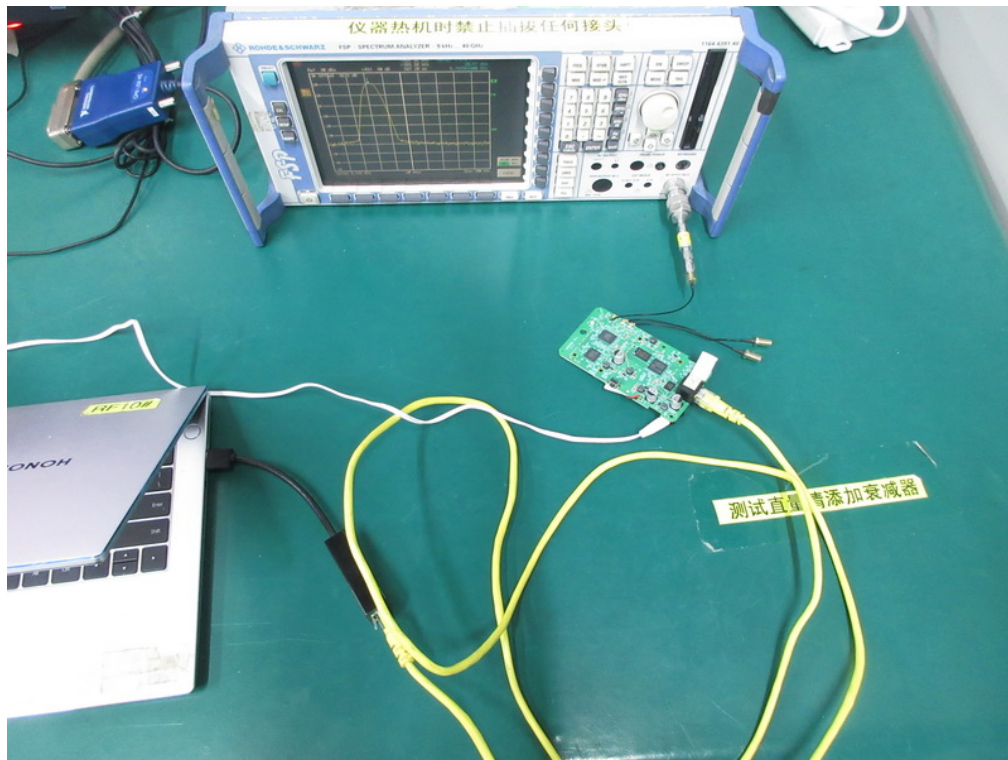

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Phase	Line
-----------	--	-------	------

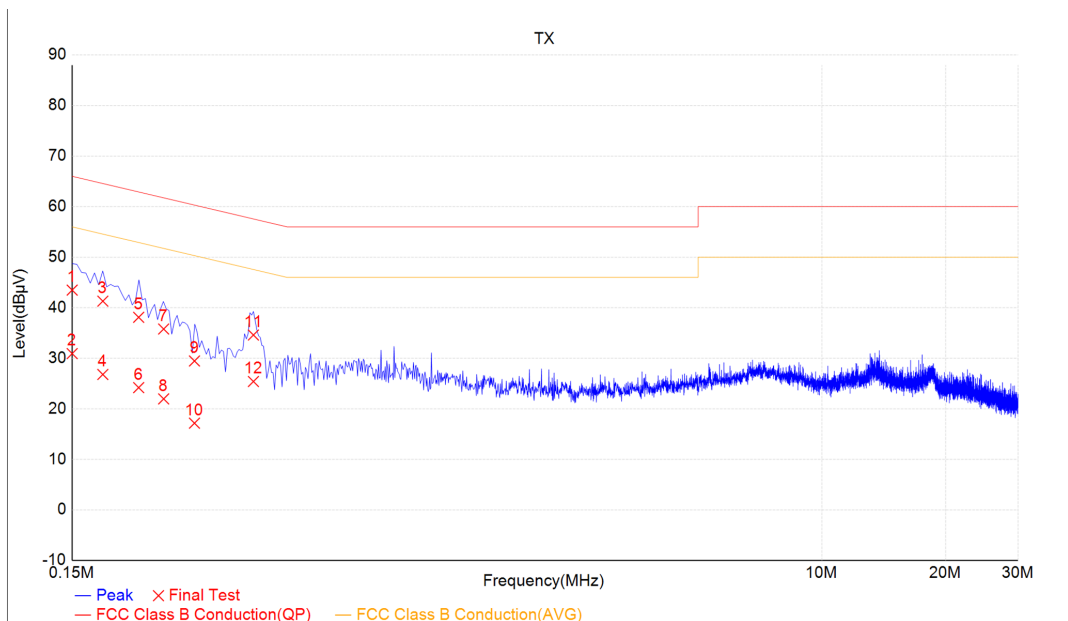


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.15	33.13	10.36	43.49	66	-22.51	QP	
	2	0.15	20.56	10.36	30.93	56	-25.07	AVG	
	3	0.1781	30.92	10.38	41.3	64.58	-23.27	QP	
	4	0.1781	16.42	10.38	26.8	54.58	-27.78	AVG	
	5	0.2177	27.7	10.41	38.11	62.89	-24.79	QP	
	6	0.2177	13.79	10.41	24.2	52.89	-28.69	AVG	
	7	0.2504	25.37	10.42	35.79	61.76	-25.96	QP	
	8	0.2504	11.55	10.42	21.97	51.76	-29.78	AVG	
	9	0.2976	19.02	10.45	29.47	60.3	-30.83	QP	
	10	0.2976	6.72	10.45	17.17	50.3	-33.13	AVG	
	11	0.414	24.13	10.46	34.6	57.57	-22.97	QP	
*	12	0.414	14.94	10.46	25.41	47.57	-22.16	AVG	

REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

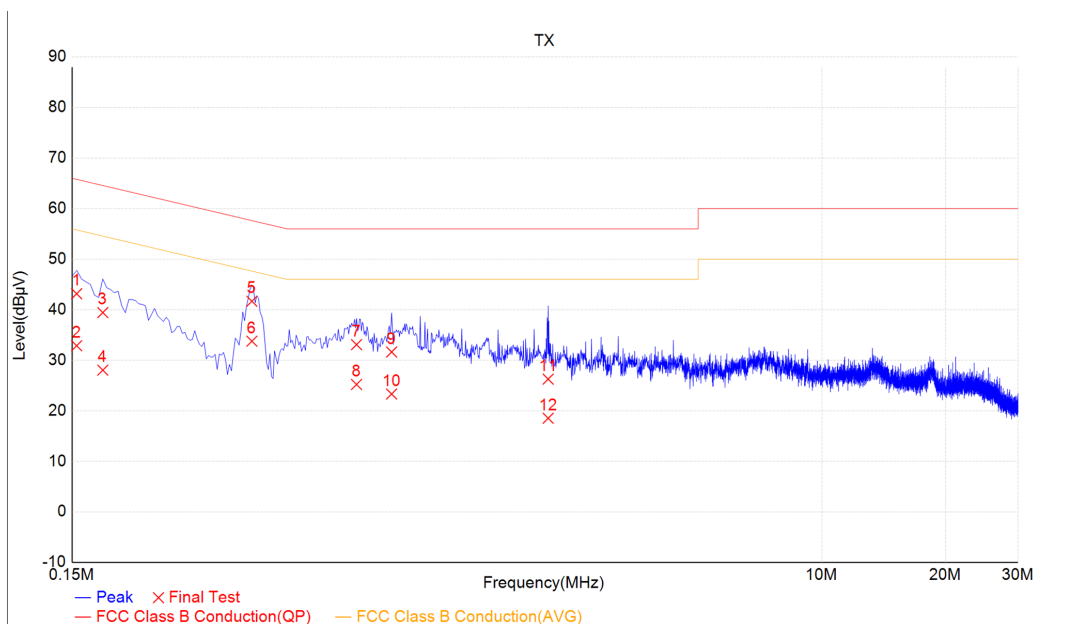


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1538	32.75	10.42	43.17	65.78	-22.61	QP	
	2	0.1538	22.47	10.42	32.88	55.78	-22.9	AVG	
	3	0.1781	29.01	10.43	39.44	64.58	-25.13	QP	
	4	0.1781	17.62	10.43	28.05	54.58	-26.53	AVG	
	5	0.4104	31.19	10.49	41.68	57.65	-15.97	QP	
*	6	0.4104	23.29	10.49	33.78	47.65	-13.87	AVG	
	7	0.7377	22.54	10.55	33.1	56	-22.9	QP	
	8	0.7377	14.66	10.55	25.22	46	-20.78	AVG	
	9	0.8978	21.06	10.58	31.64	56	-24.36	QP	
	10	0.8978	12.75	10.58	23.33	46	-22.67	AVG	
	11	2.158	15.58	10.69	26.27	56	-29.73	QP	
	12	2.158	7.85	10.69	18.54	46	-27.46	AVG	

REMARKS:
(1) Level = Reading + Factor.
(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

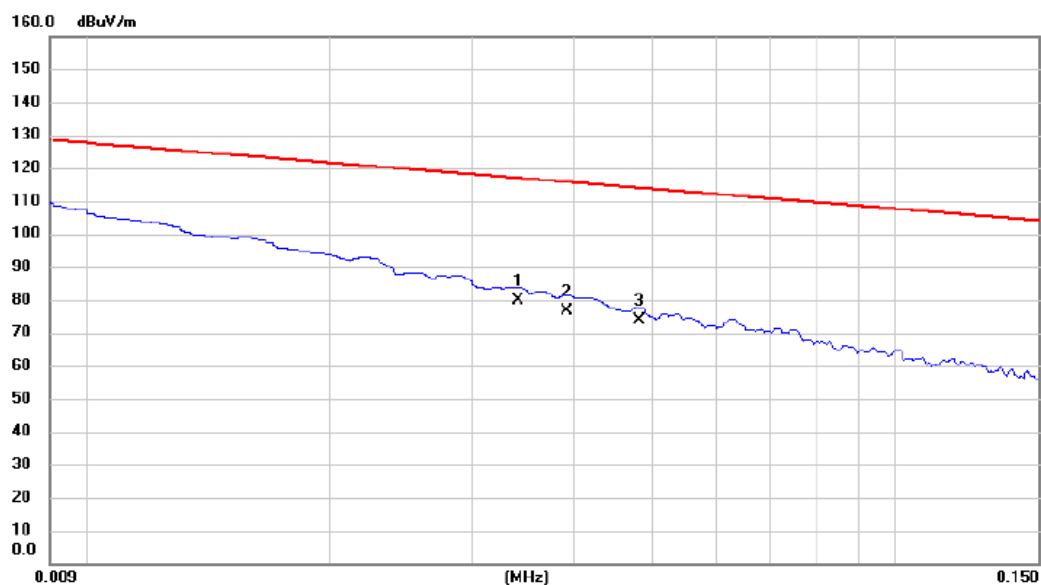


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.034	59.34	20.57	79.91	116.95	-37.04	AVG	
2	0.039	56.14	20.60	76.74	115.74	-39.00	AVG	
3	0.048	53.29	20.64	73.93	113.94	-40.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

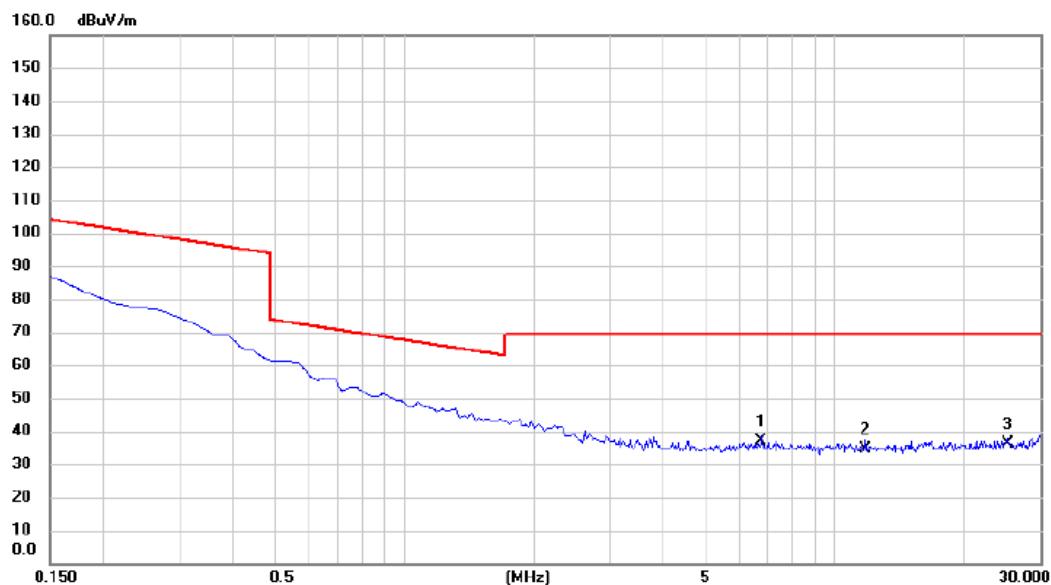


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6.747	16.74	20.40	37.14	69.54	-32.40	QP	
2	11.762	14.31	20.42	34.73	69.54	-34.81	QP	
3	25.224	15.86	20.22	36.08	69.54	-33.46	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

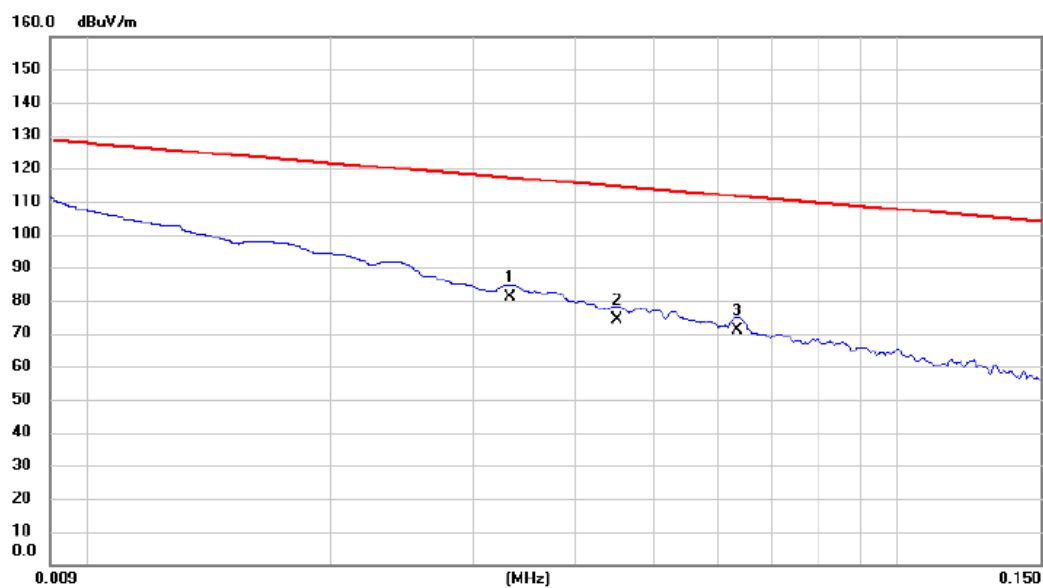


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.033	60.31	20.57	80.88	117.16	-36.28	AVG	
2		0.045	53.75	20.63	74.38	114.52	-40.14	AVG	
3		0.063	50.28	20.61	70.89	111.56	-40.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

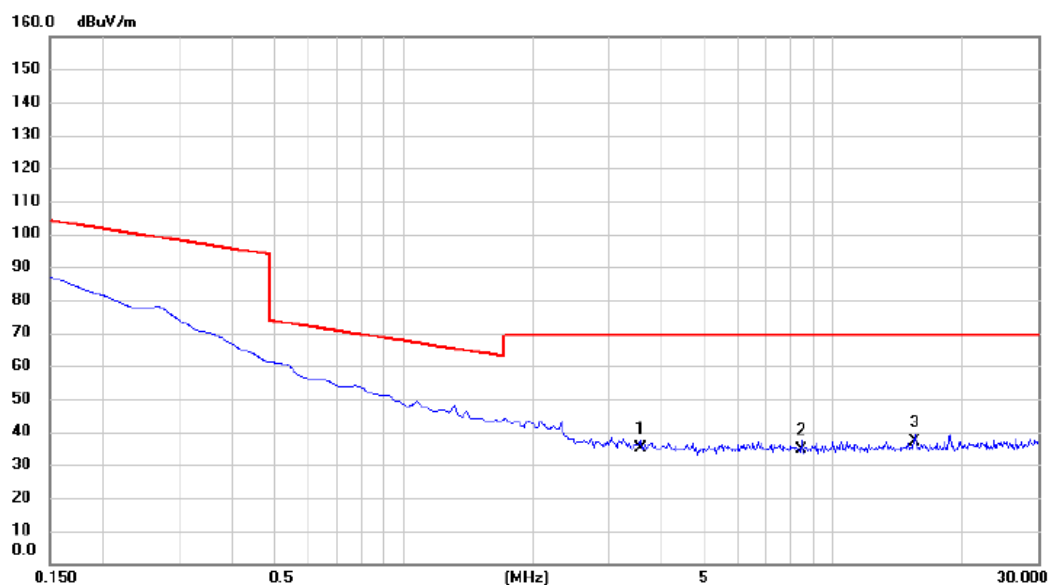


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3.553	14.74	20.34	35.08	69.54	-34.46	QP	
2	8.448	14.26	20.48	34.74	69.54	-34.80	QP	
3 *	15.493	16.59	20.41	37.00	69.54	-32.54	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

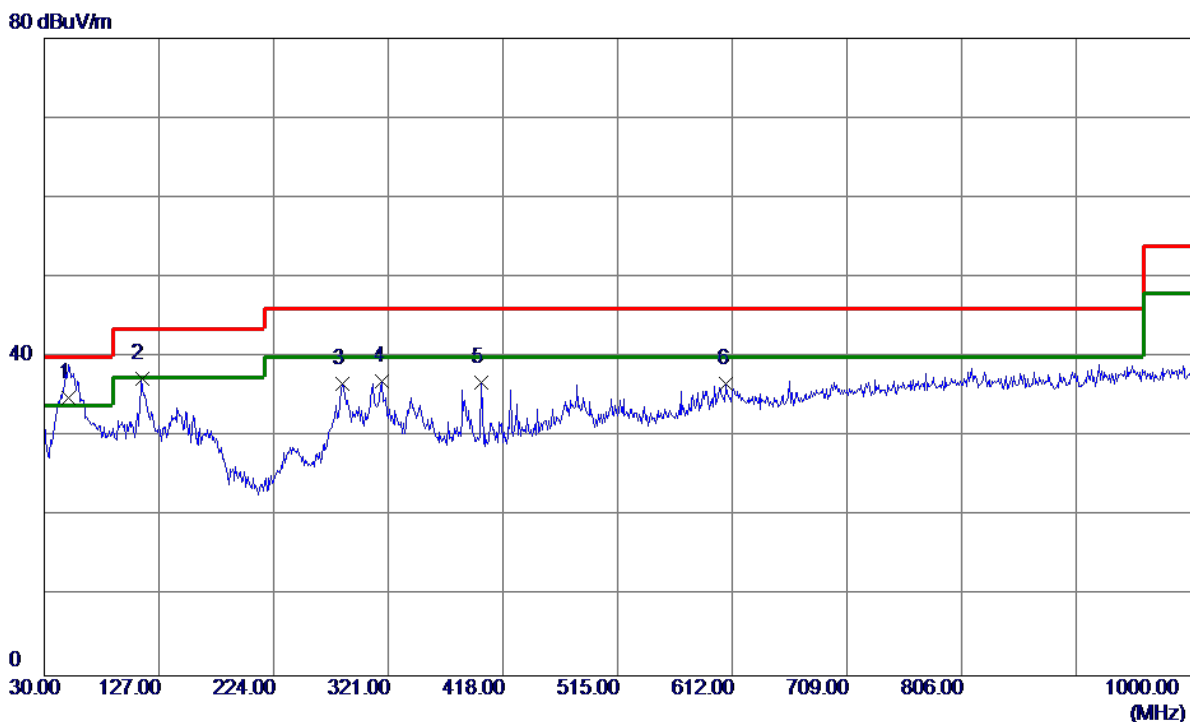


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	50.3700	46.24	-11.42	34.82	40.00	-5.18	QP	
2	112.4500	51.66	-14.33	37.33	43.52	-6.19	Peak	
3	282.2000	47.60	-10.95	36.65	46.02	-9.37	Peak	
4	316.1500	46.90	-10.00	36.90	46.02	-9.12	Peak	
5	399.5700	45.16	-8.31	36.85	46.02	-9.17	Peak	
6	607.1500	40.23	-3.52	36.71	46.02	-9.31	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 155 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

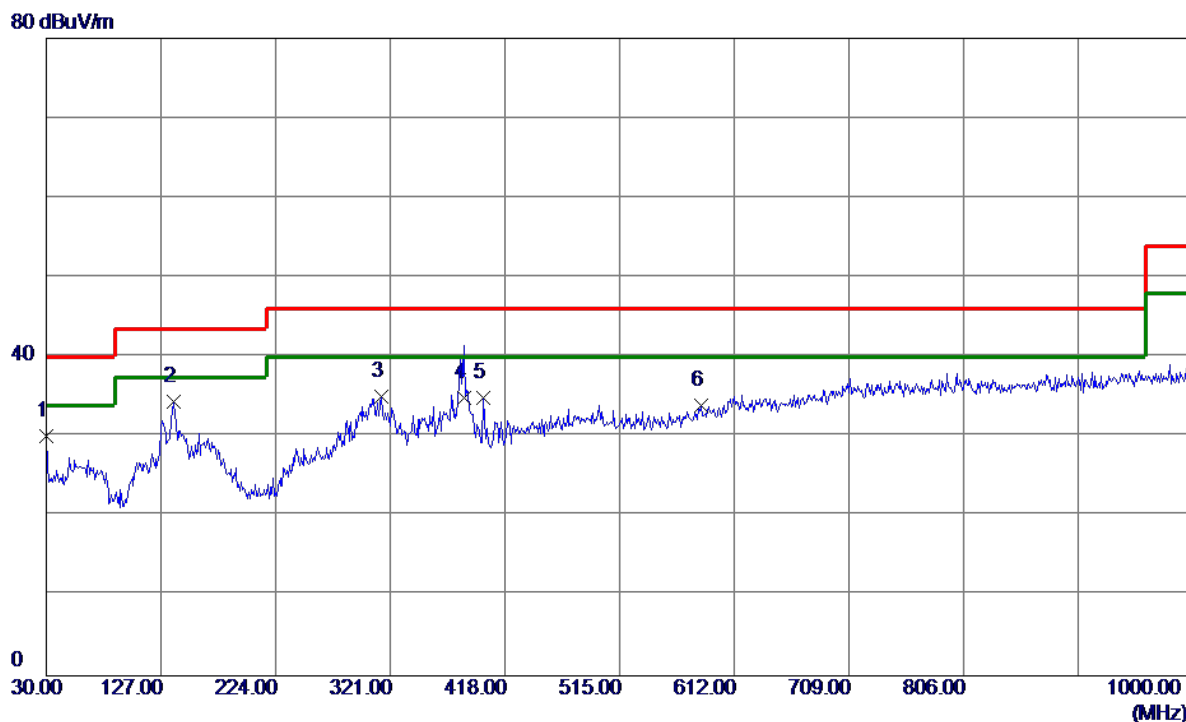

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	41.79	-11.64	30.15	40.00	-9.85	Peak	
2 *	137.6700	46.31	-11.89	34.42	43.52	-9.10	Peak	
3	313.2400	45.10	-10.08	35.02	46.02	-11.00	Peak	
4	383.0799	43.37	-8.48	34.89	46.02	-11.13	QP	
5	399.5700	43.15	-8.31	34.84	46.02	-11.18	Peak	
6	583.8700	37.98	-4.10	33.88	46.02	-12.14	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

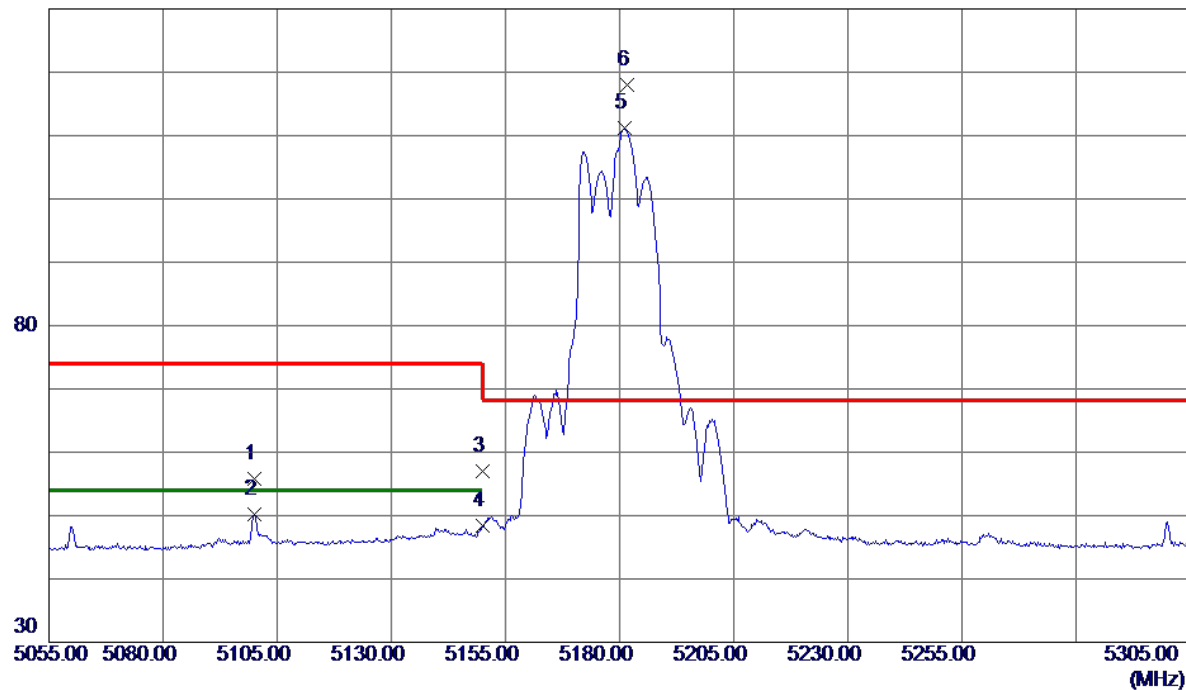


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5100.0000	42.14	13.64	55.78	74.00	-18.22	Peak	
2	5100.0000	36.53	13.64	50.17	54.00	-3.83	AVG	
3	5150.0000	43.22	13.78	57.00	74.00	-17.00	Peak	
4	5150.0000	34.56	13.78	48.34	54.00	-5.66	AVG	
5	5181.0000	97.33	13.86	111.19	999.00	-887.81	AVG	No Limit
6 *	5181.7500	104.08	13.86	117.94	68.20	49.74	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

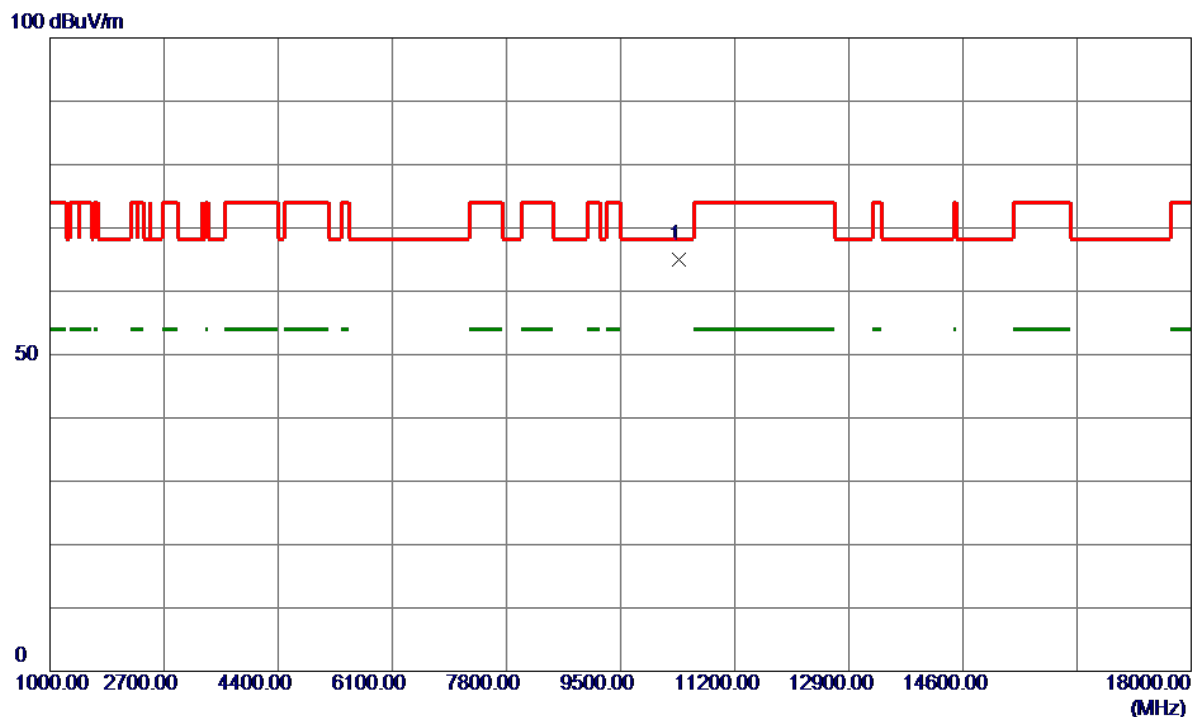


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10362.3500	55.36	9.57	64.93	68.20	-3.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

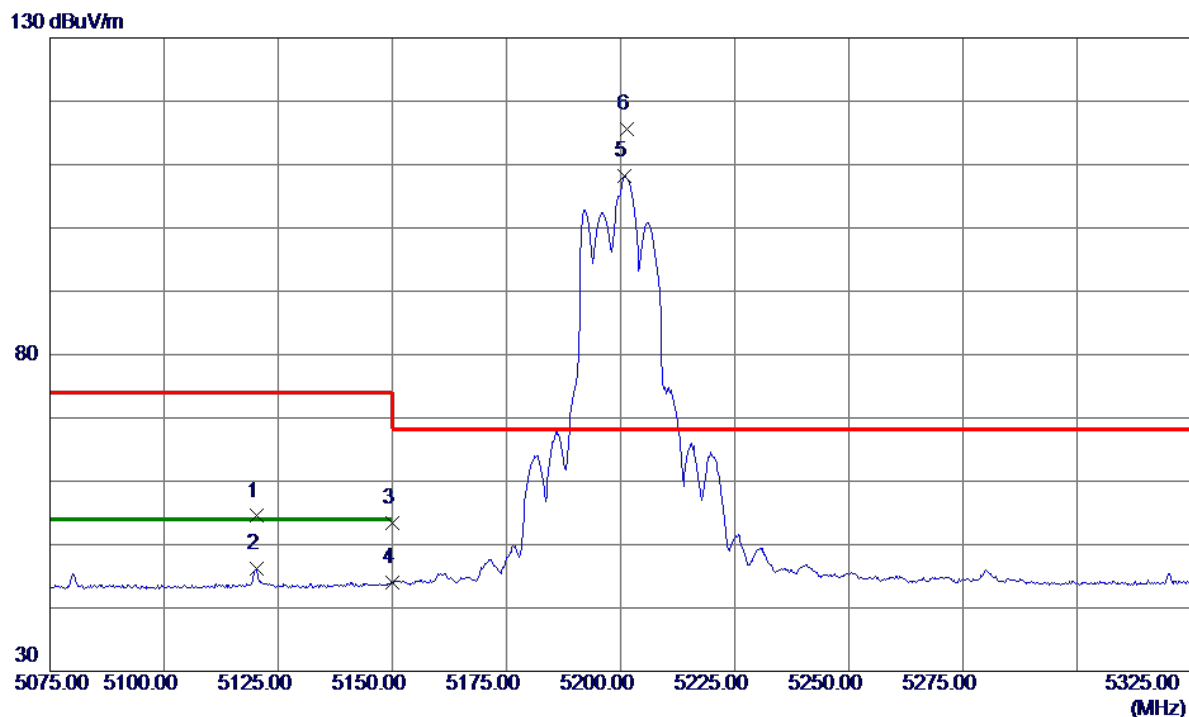


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.2500	40.80	13.70	54.50	74.00	-19.50	Peak	
2	5120.2500	32.51	13.70	46.21	54.00	-7.79	AVG	
3	5150.0000	39.55	13.78	53.33	74.00	-20.67	Peak	
4	5150.0000	30.23	13.78	44.01	54.00	-9.99	AVG	
5	5200.7500	94.23	13.91	108.14	999.00	-890.86	AVG	No Limit
6 *	5201.5000	101.71	13.92	115.63	68.20	47.43	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

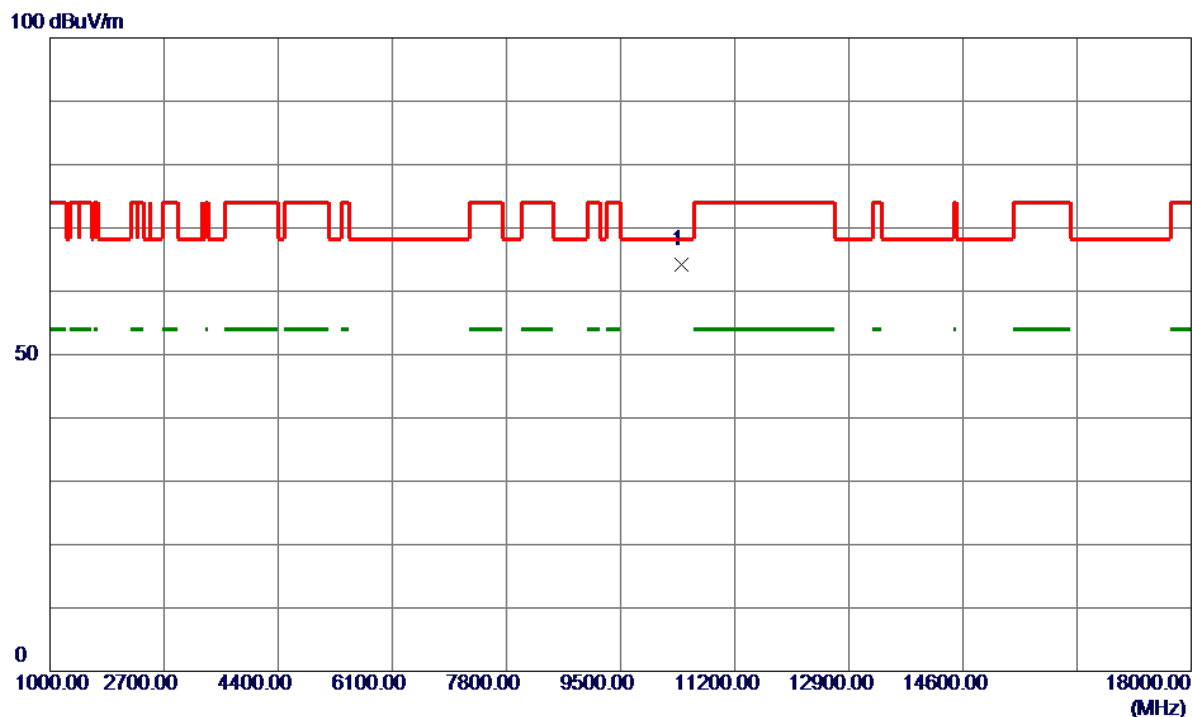


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10402.9000	54.53	9.62	64.15	68.20	-4.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

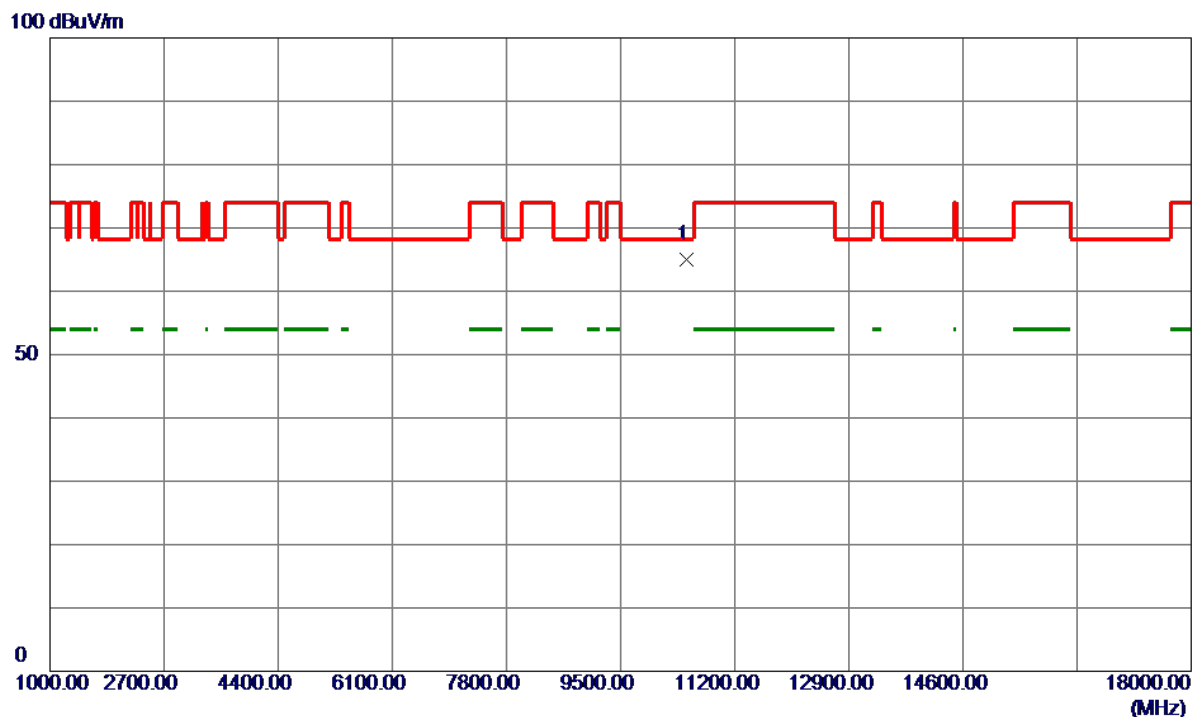


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10481.8000	55.39	9.70	65.09	68.20	-3.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

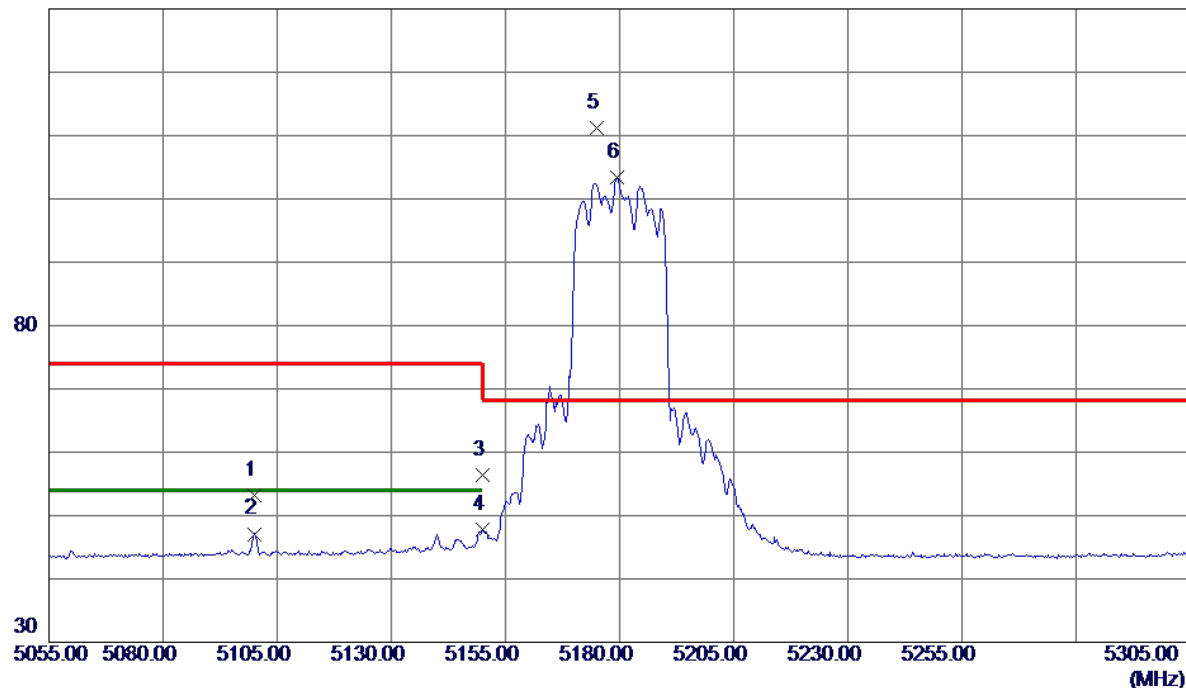


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5100.0000	39.60	13.64	53.24	74.00	-20.76	Peak	
2	5100.0000	33.46	13.64	47.10	54.00	-6.90	AVG	
3	5150.0000	42.57	13.78	56.35	74.00	-17.65	Peak	
4	5150.0000	33.93	13.78	47.71	54.00	-6.29	AVG	
5 *	5175.0000	97.38	13.84	111.22	68.20	43.02	Peak	No Limit
6	5179.5000	89.54	13.86	103.40	999.00	-895.60	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

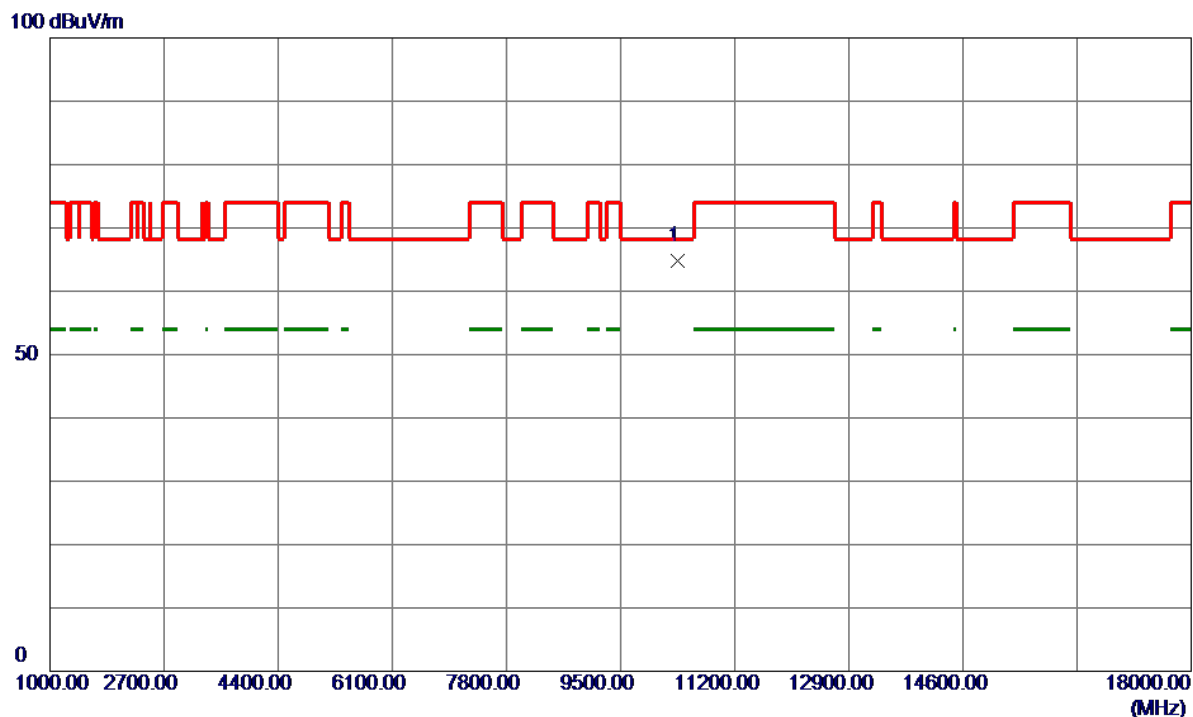


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10352.3000	55.29	9.56	64.85	68.20	-3.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

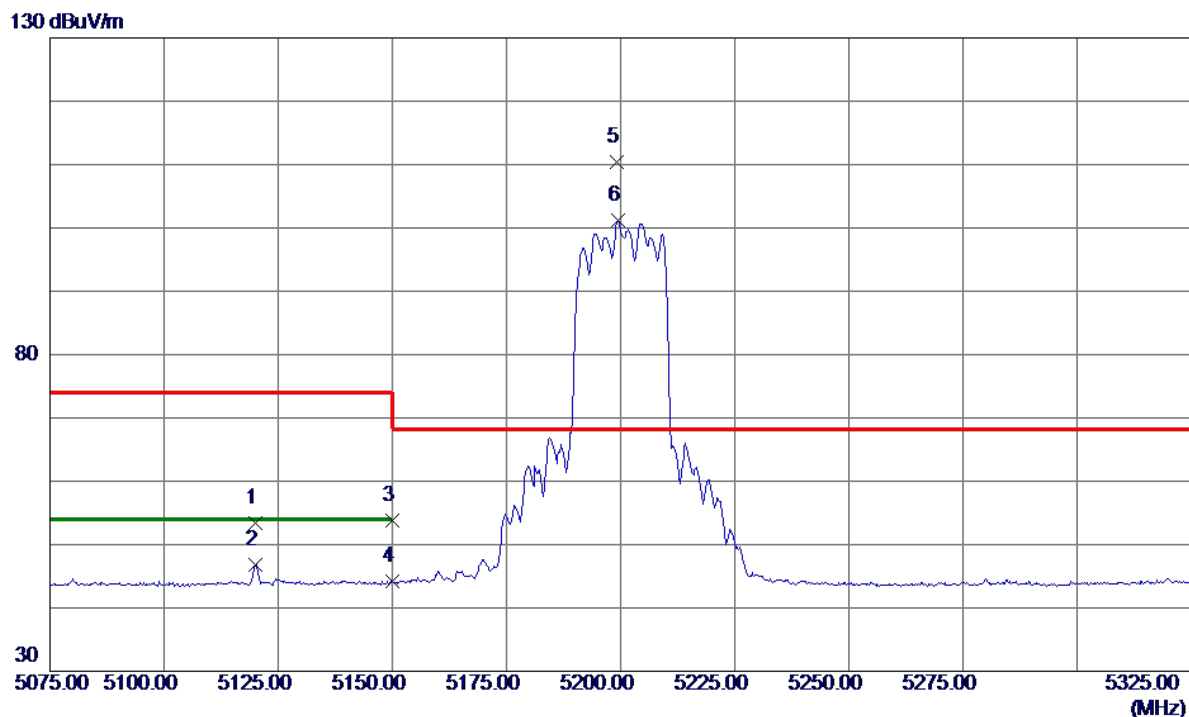


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.0000	39.70	13.70	53.40	74.00	-20.60	Peak	
2	5120.0000	33.11	13.70	46.81	54.00	-7.19	AVG	
3	5150.0000	40.02	13.78	53.80	74.00	-20.20	Peak	
4	5150.0000	30.34	13.78	44.12	54.00	-9.88	AVG	
5 *	5199.2500	96.55	13.91	110.46	68.20	42.26	Peak	No Limit
6	5199.5000	87.20	13.91	101.11	999.00	-897.89	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

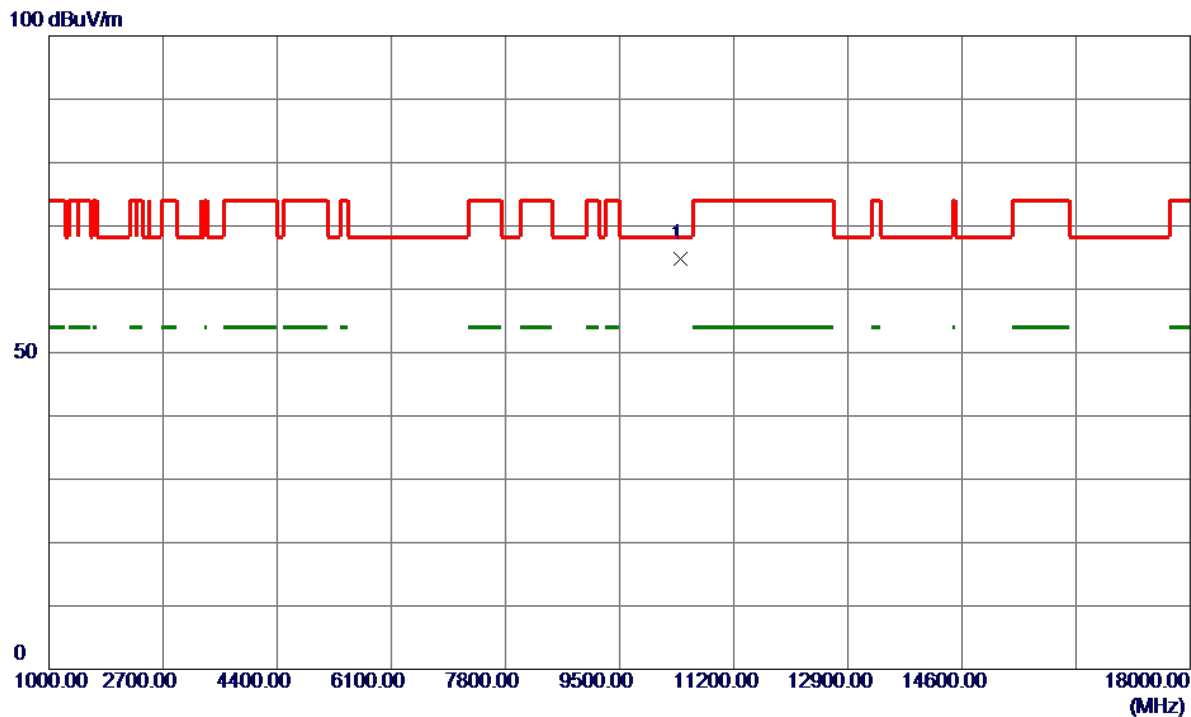


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10402.8000	55.16	9.62	64.78	68.20	-3.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

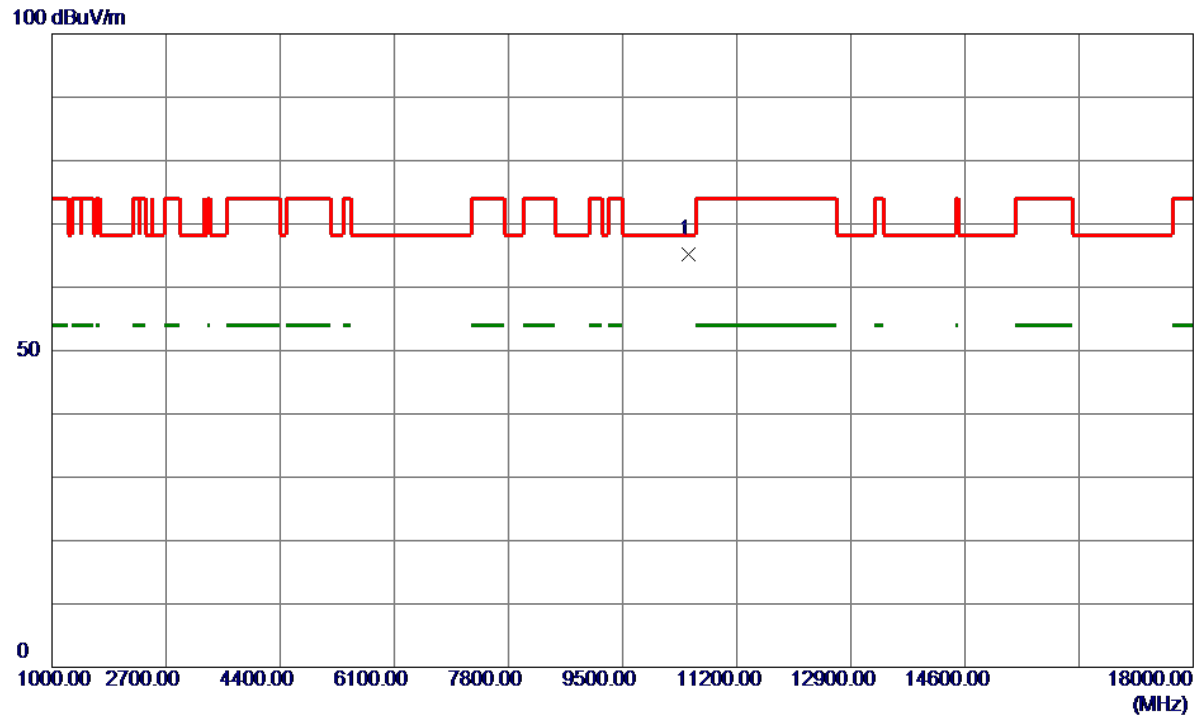


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10482.9500	55.41	9.71	65.12	68.20	-3.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

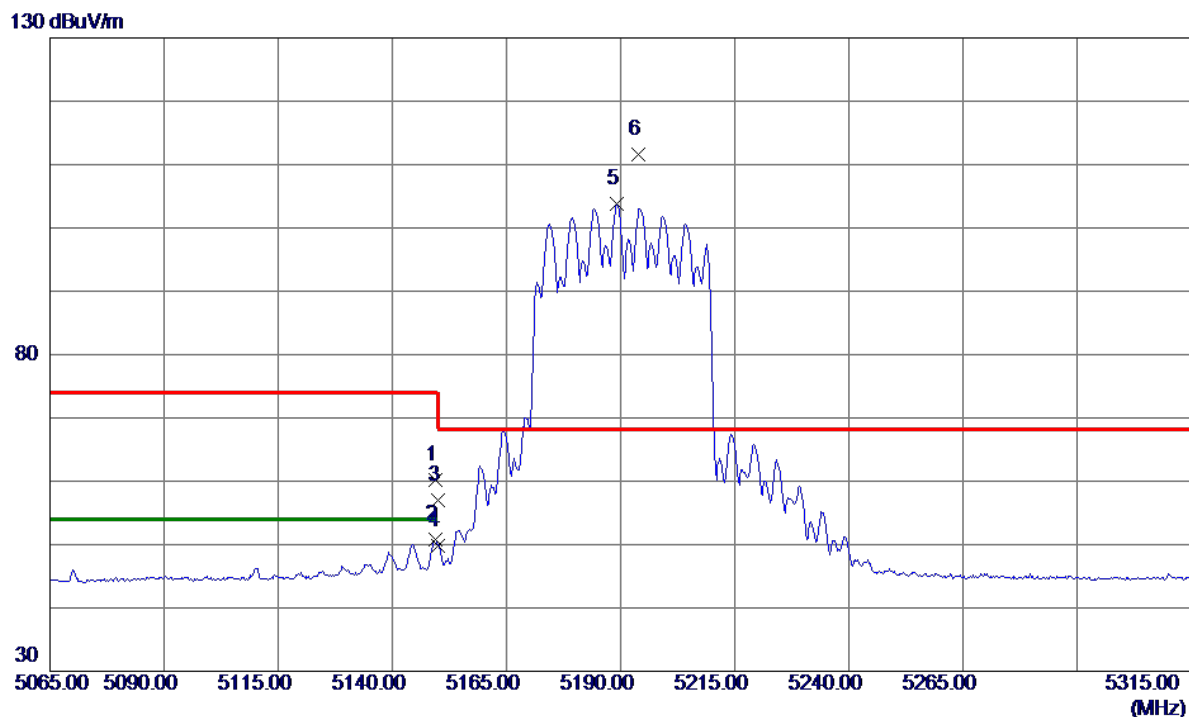


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.5000	46.50	13.78	60.28	74.00	-13.72	Peak	
2	5149.5000	36.96	13.78	50.74	54.00	-3.26	AVG	
3	5150.0000	43.27	13.78	57.05	74.00	-16.95	Peak	
4	5150.0000	35.98	13.78	49.76	54.00	-4.24	AVG	
5	5189.2500	89.91	13.88	103.79	999.00	-895.21	AVG	No Limit
6 *	5194.0000	97.70	13.90	111.60	68.20	43.40	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

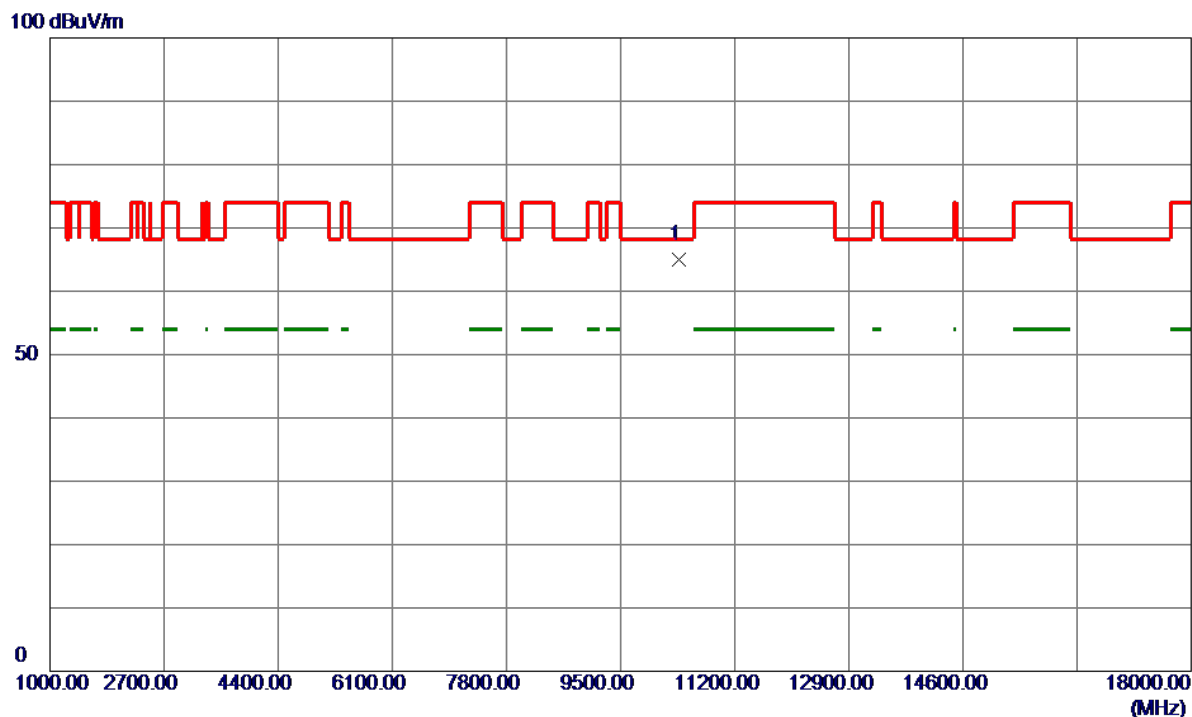


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10377.9000	55.39	9.59	64.98	68.20	-3.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

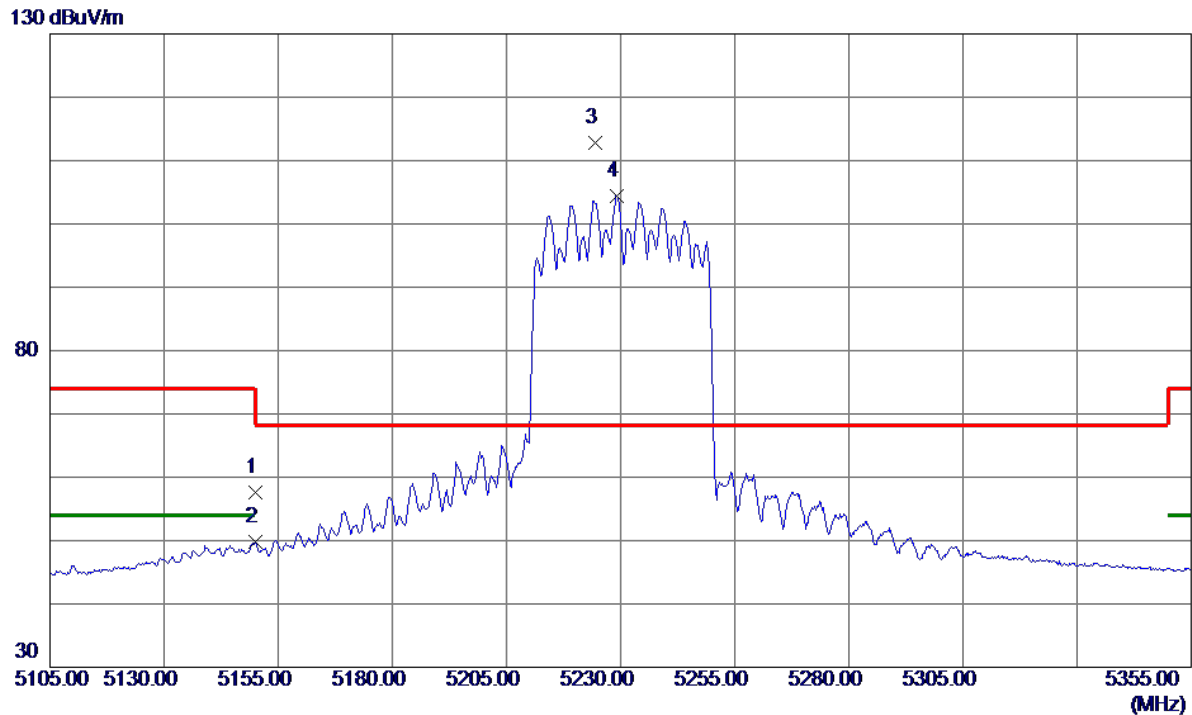


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.87	13.78	57.65	74.00	-16.35	Peak	
2	5150.0000	36.01	13.78	49.79	54.00	-4.21	AVG	
3 *	5224.5000	98.75	13.98	112.73	68.20	44.53	Peak	No Limit
4	5229.2500	90.40	13.99	104.39	999.00	-894.61	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

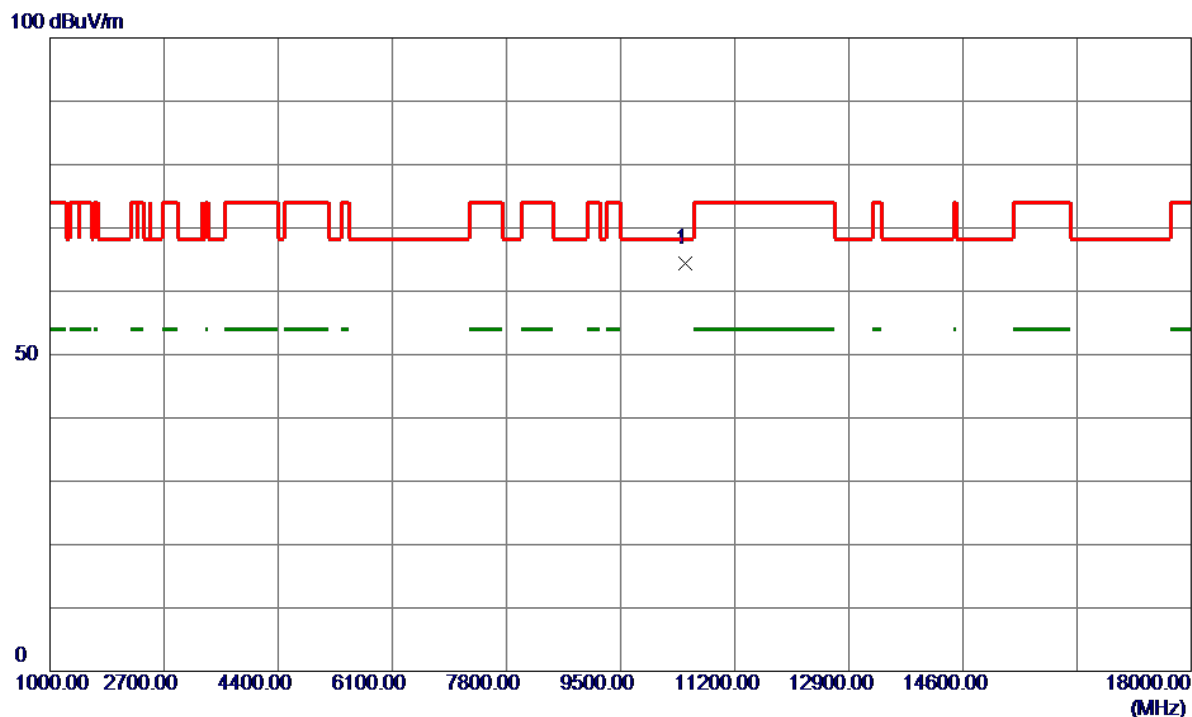


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10463.3000	54.74	9.68	64.42	68.20	-3.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

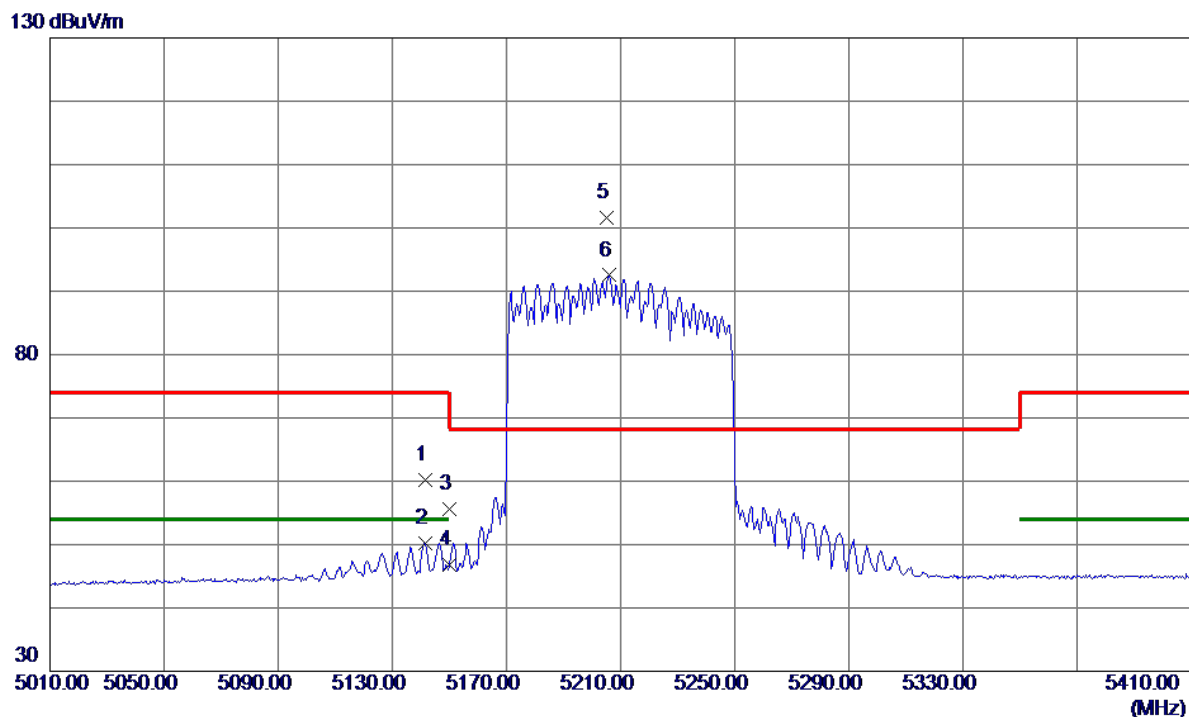


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.6000	46.40	13.75	60.15	74.00	-13.85	Peak	
2	5141.6000	36.52	13.75	50.27	54.00	-3.73	AVG	
3	5150.0000	41.74	13.78	55.52	74.00	-18.48	Peak	
4	5150.0000	33.11	13.78	46.89	54.00	-7.11	AVG	
5 *	5205.2000	87.63	13.93	101.56	68.20	33.36	Peak	No Limit
6	5206.0000	78.57	13.93	92.50	999.00	-906.50	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

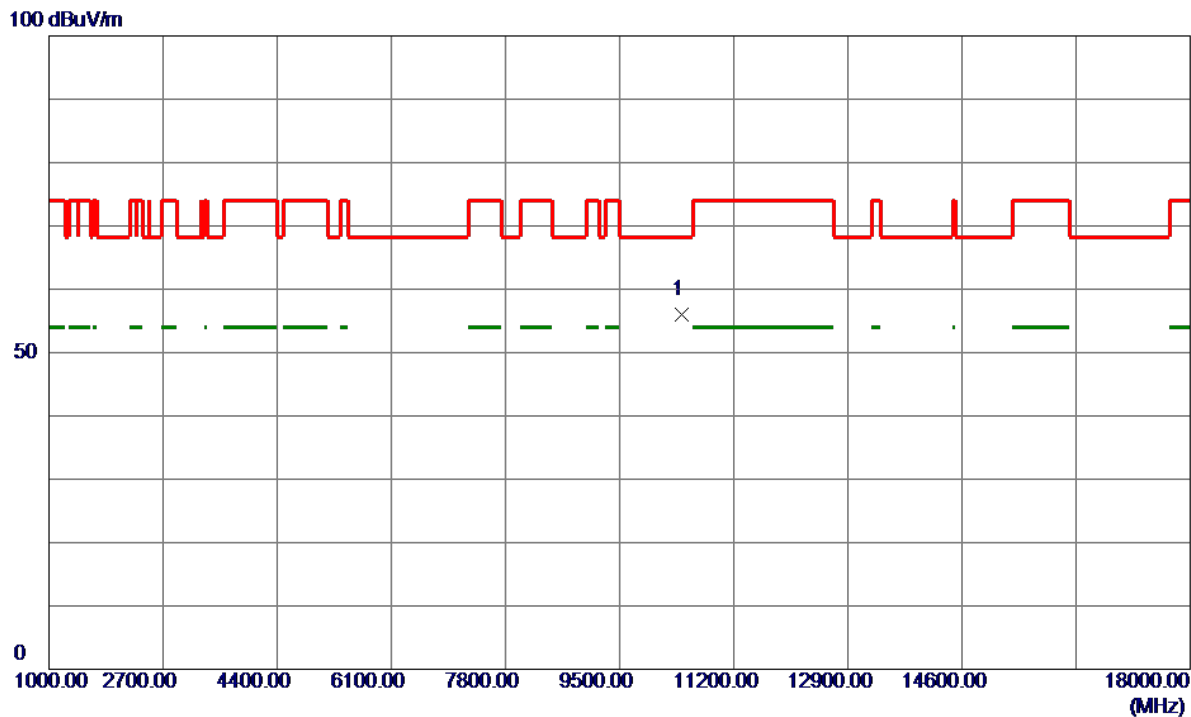


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10427.3500	46.28	9.64	55.92	68.20	-12.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

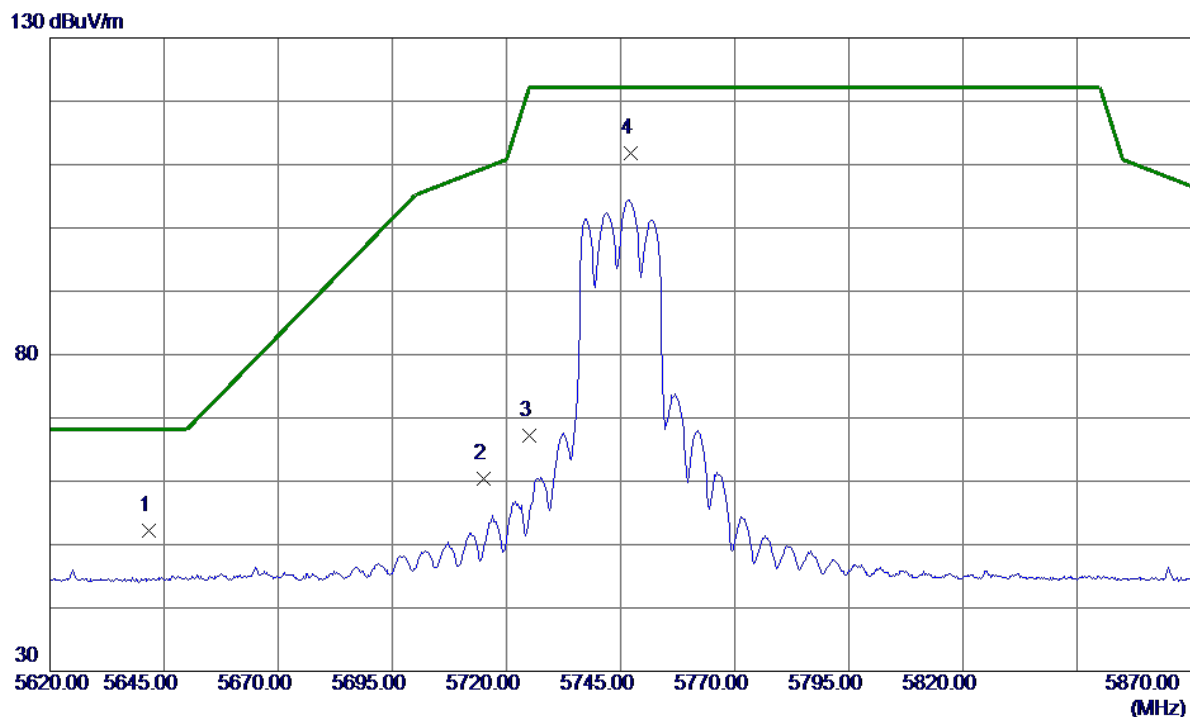


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5641.7500	37.11	15.18	52.29	68.20	-15.91	Peak	
2	5715.0000	44.96	15.42	60.38	109.40	-49.02	Peak	
3	5725.0000	51.68	15.45	67.13	122.20	-55.07	Peak	
4 *	5747.2500	96.35	15.52	111.87	122.20	-10.33	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

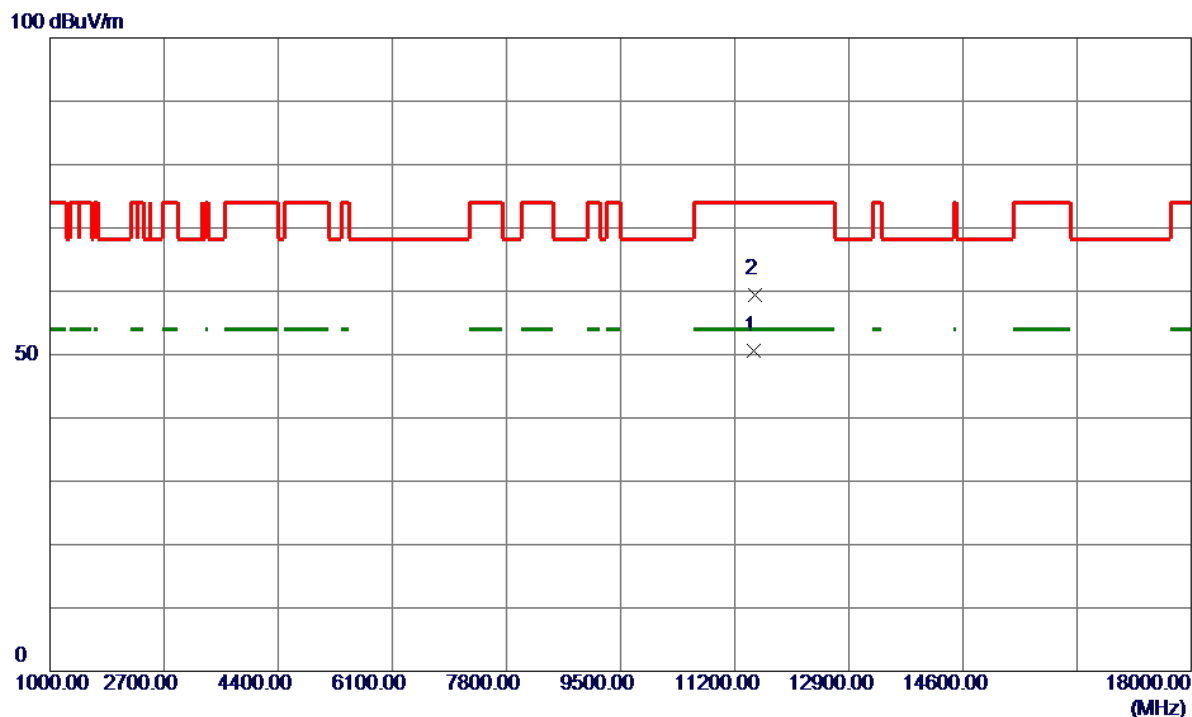


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11492.3000	40.09	10.47	50.56	54.00	-3.44	AVG	
2	11493.4000	49.03	10.47	59.50	74.00	-14.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

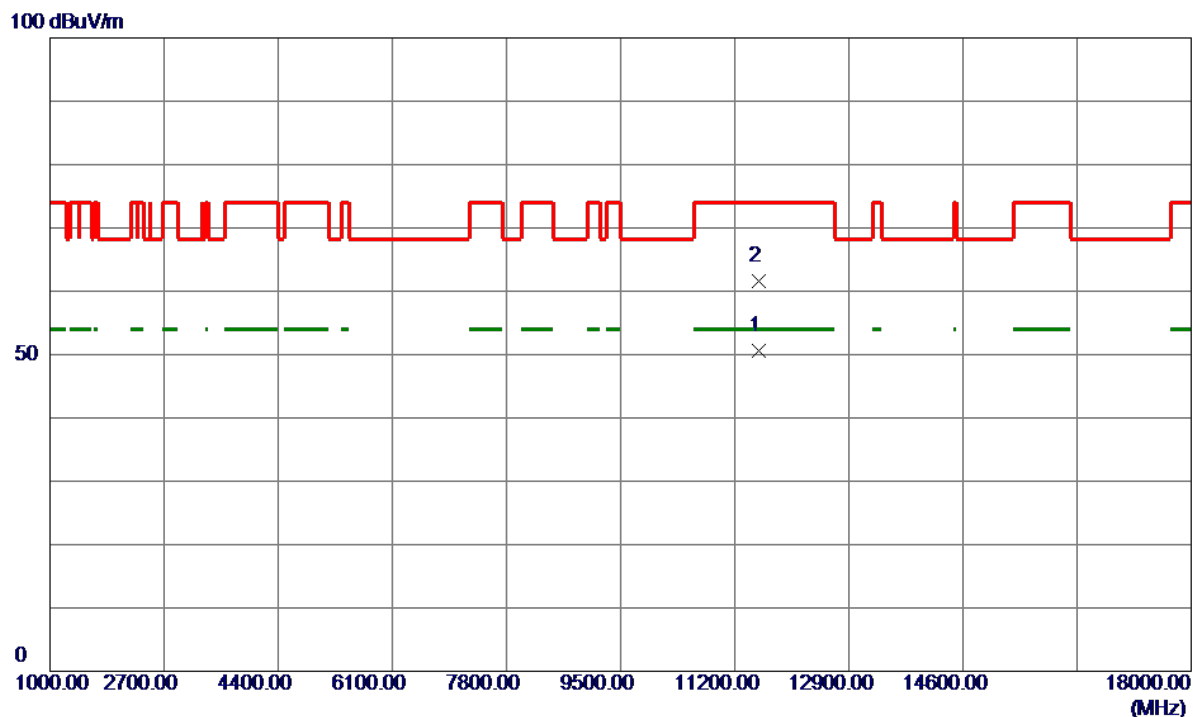


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.1500	40.10	10.51	50.61	54.00	-3.39	AVG	
2	11567.6000	51.17	10.51	61.68	74.00	-12.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

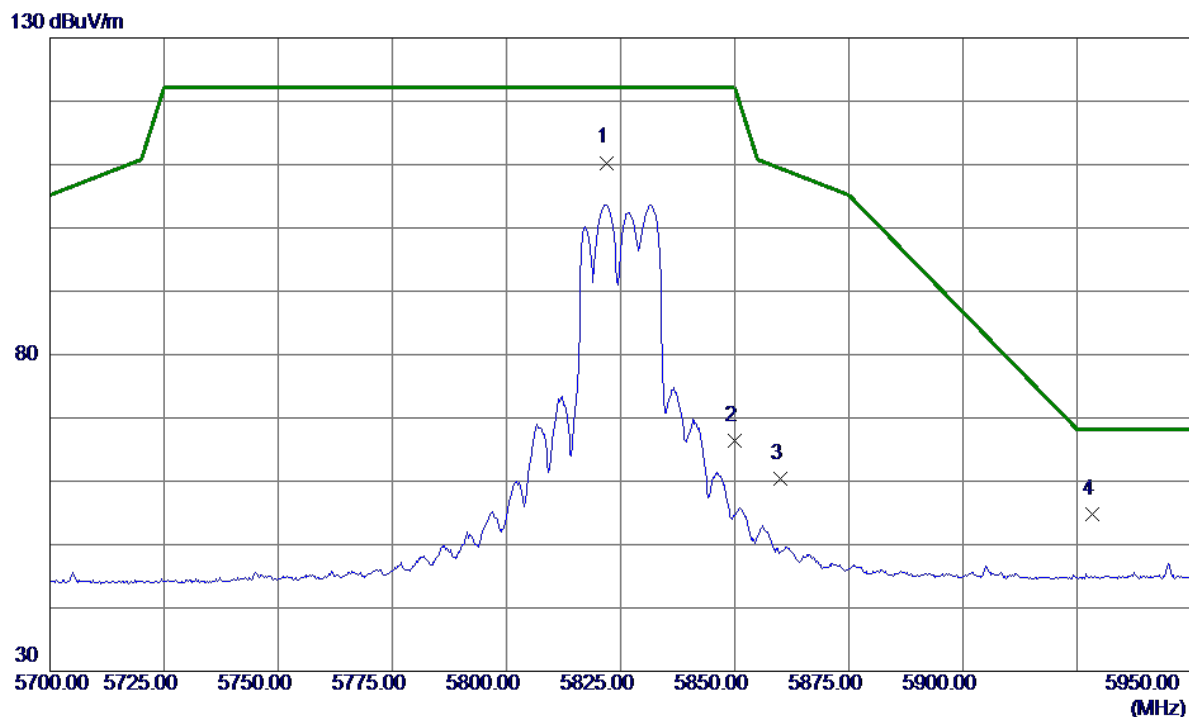


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.0000	94.54	15.76	110.30	122.20	-11.90	Peak	No Limit
2	5850.0000	50.49	15.86	66.35	122.20	-55.85	Peak	
3	5860.0000	44.53	15.89	60.42	109.40	-48.98	Peak	
4	5928.2500	38.60	16.11	54.71	68.20	-13.49	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

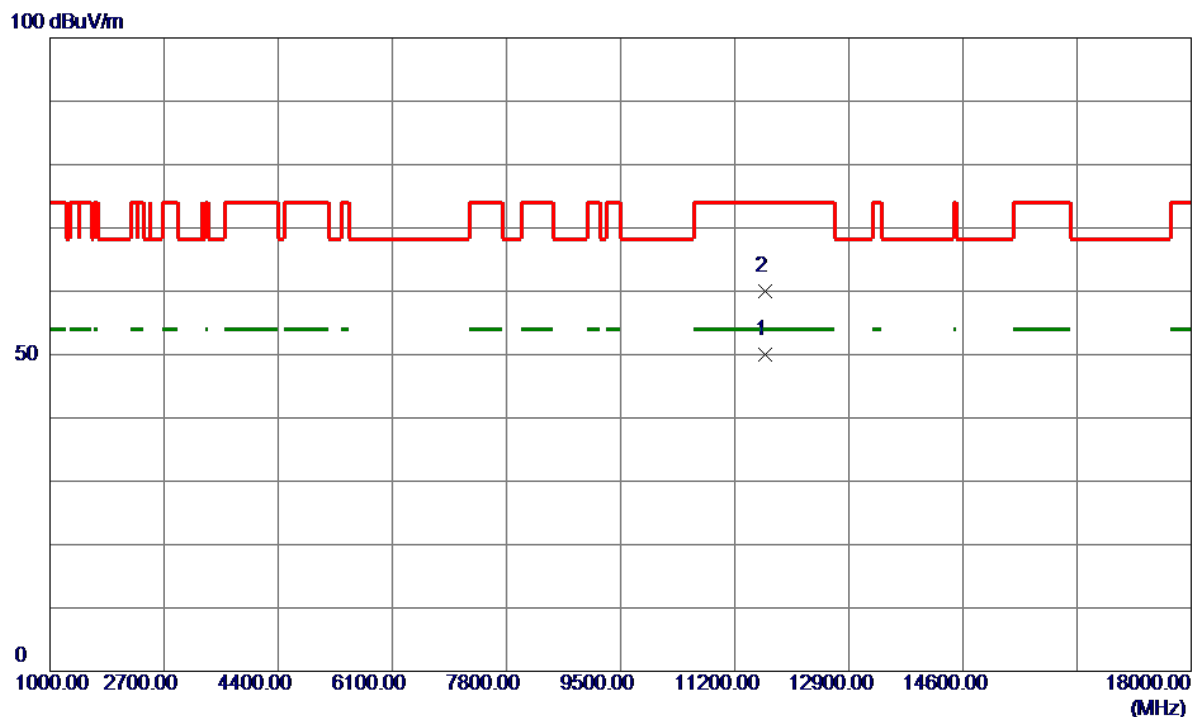


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11647.2000	39.37	10.54	49.91	54.00	-4.09	AVG	
2	11655.1000	49.51	10.54	60.05	74.00	-13.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

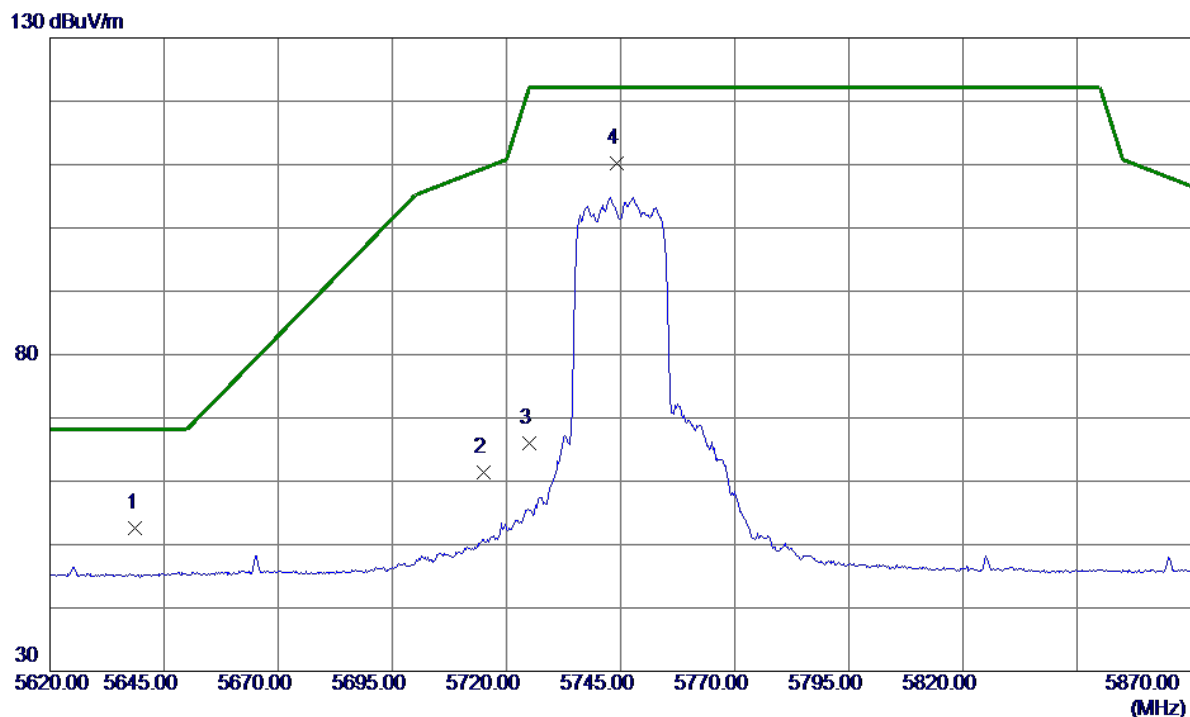


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5638.7500	37.47	15.17	52.64	68.20	-15.56	Peak	
2	5715.0000	45.97	15.42	61.39	109.40	-48.01	Peak	
3	5725.0000	50.52	15.45	65.97	122.20	-56.23	Peak	
4 *	5744.2500	94.76	15.51	110.27	122.20	-11.93	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

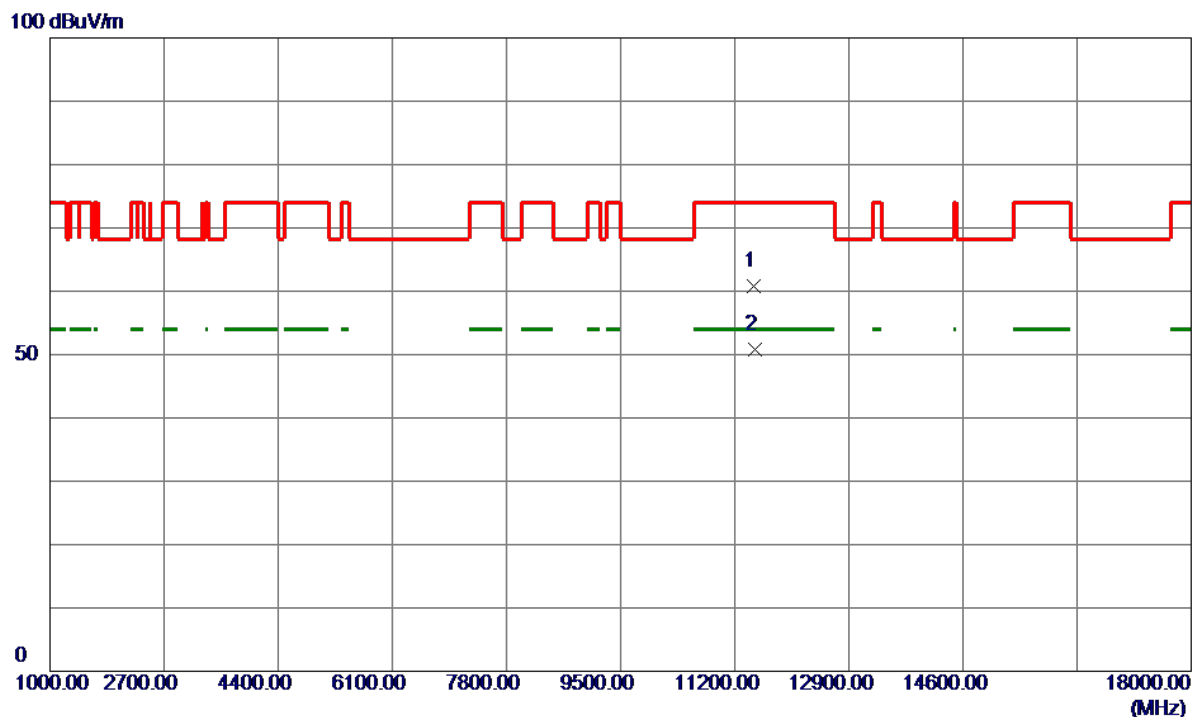


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11492.4500	50.36	10.47	60.83	74.00	-13.17	Peak	
2 *	11492.9000	40.37	10.47	50.84	54.00	-3.16	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

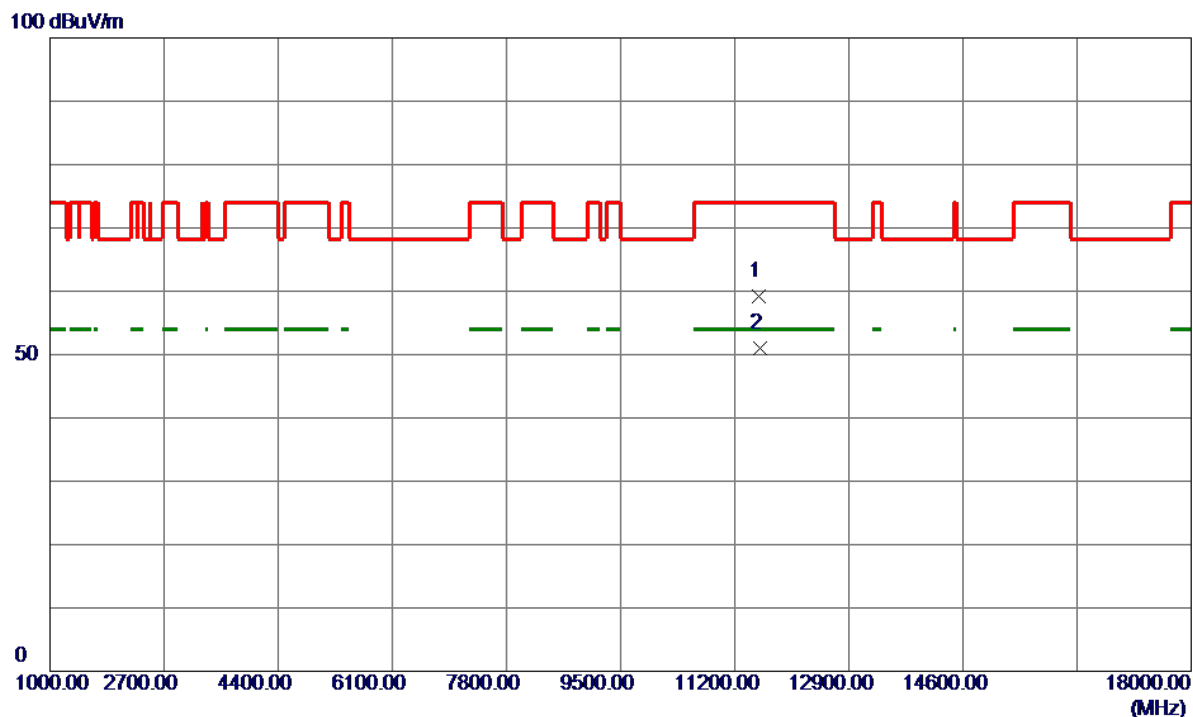


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.9500	48.72	10.51	59.23	74.00	-14.77	Peak	
2 *	11572.4000	40.42	10.51	50.93	54.00	-3.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

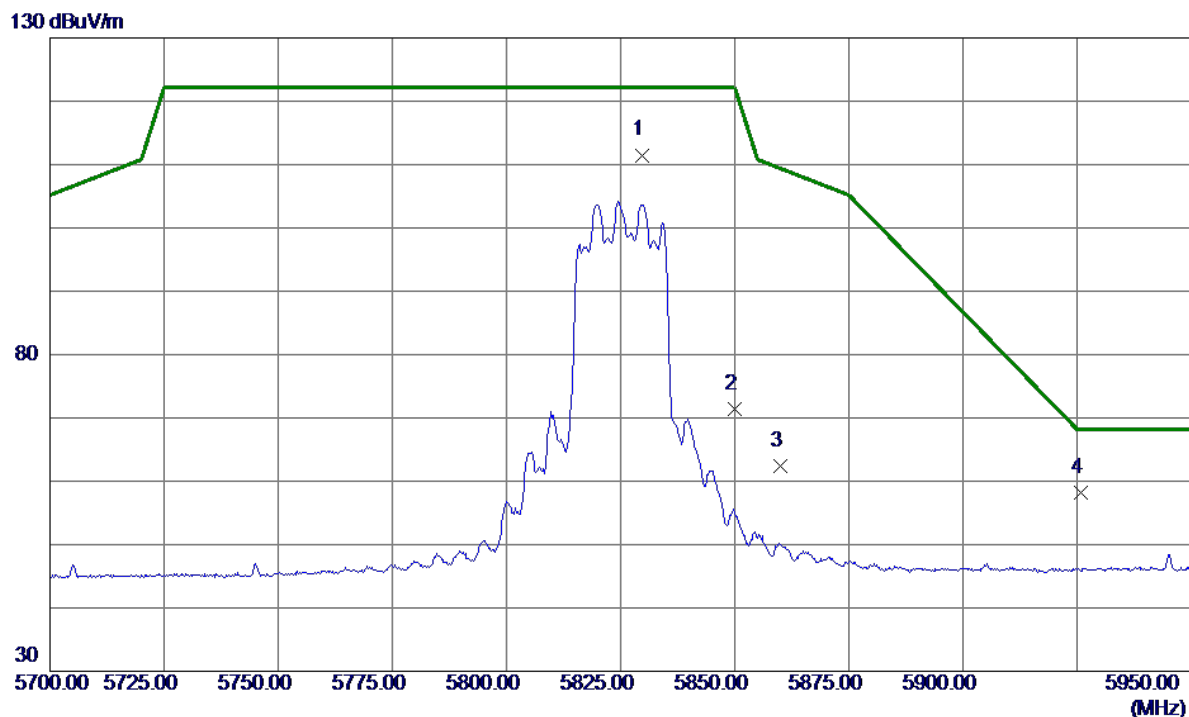


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5829.7500	95.71	15.79	111.50	122.20	-10.70	Peak	No Limit
2	5850.0000	55.61	15.86	71.47	122.20	-50.73	Peak	
3	5860.0000	46.59	15.89	62.48	109.40	-46.92	Peak	
4 *	5925.7500	42.03	16.10	58.13	68.20	-10.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

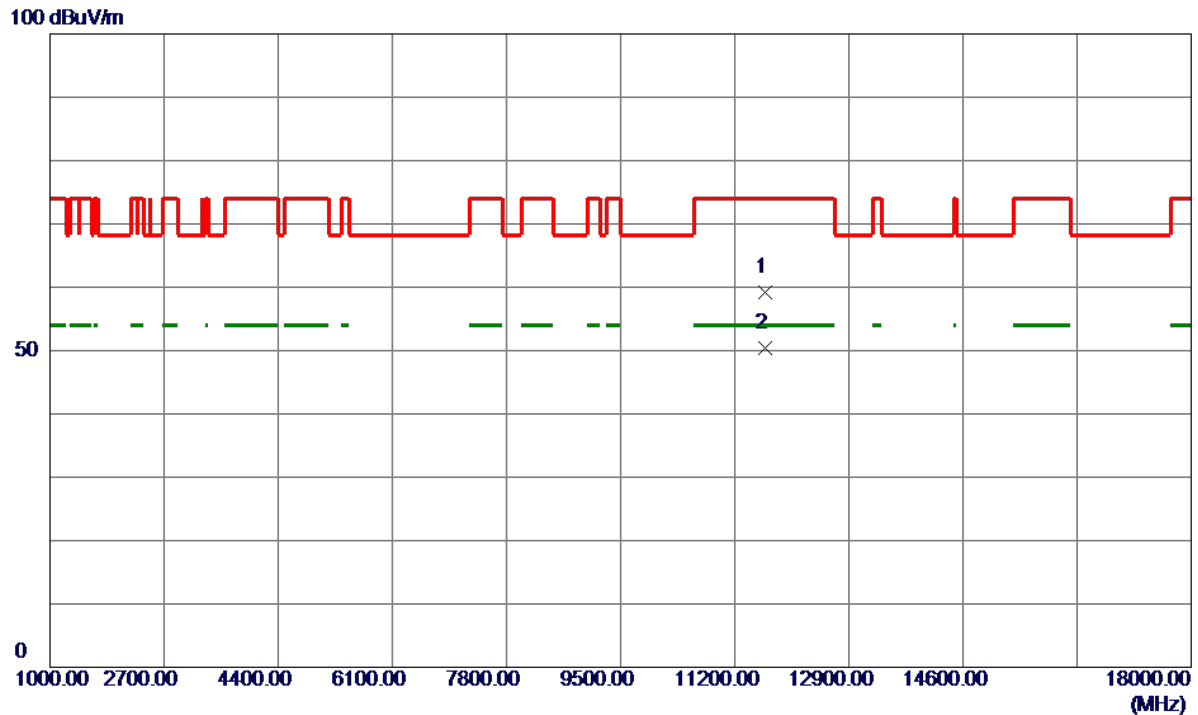


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11647.1500	48.65	10.54	59.19	74.00	-14.81	Peak	
2 *	11652.4500	39.94	10.54	50.48	54.00	-3.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

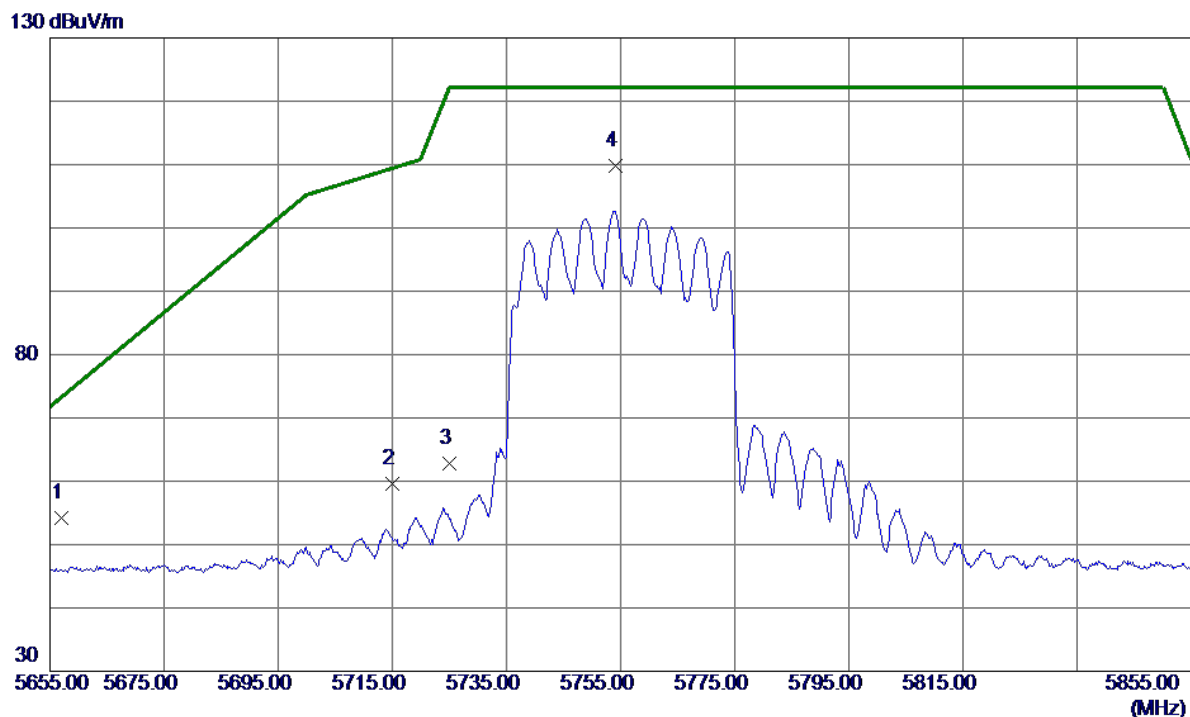


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5657.0000	39.04	15.23	54.27	73.38	-19.11	Peak	
2	5715.0000	44.23	15.42	59.65	109.40	-49.75	Peak	
3	5725.0000	47.30	15.45	62.75	122.20	-59.45	Peak	
4 *	5754.2000	94.28	15.55	109.83	122.20	-12.37	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

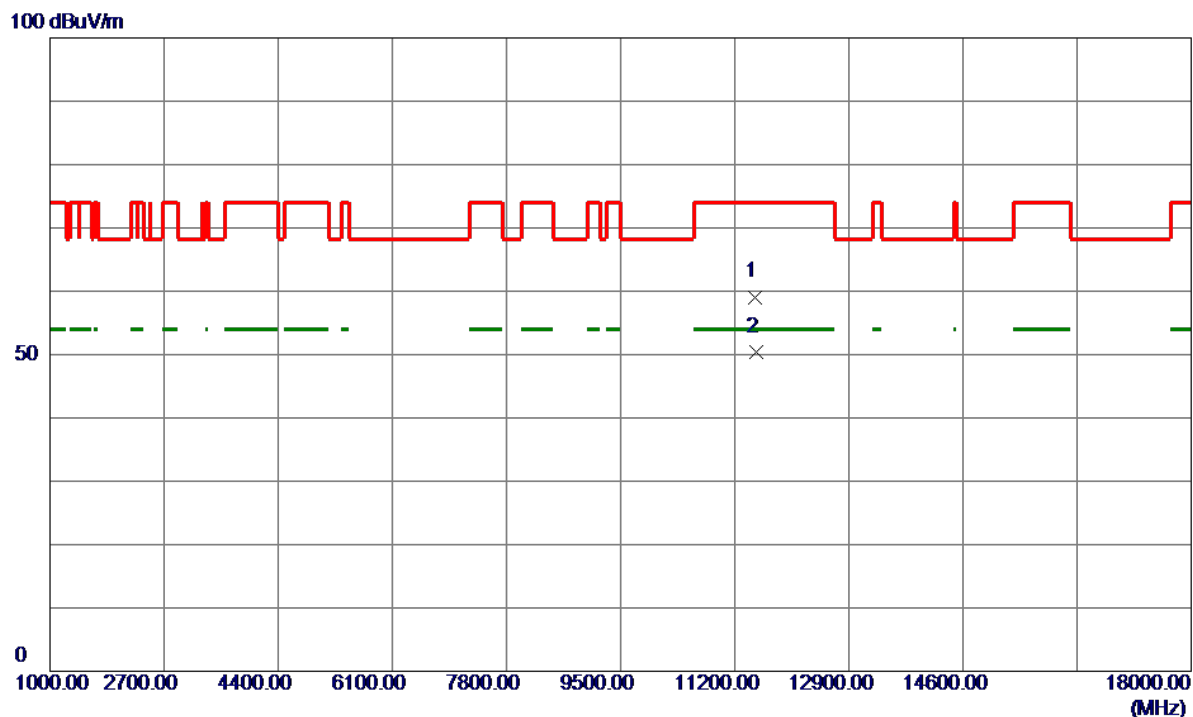


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11505.5000	48.62	10.48	59.10	74.00	-14.90	Peak	
2 *	11512.6000	39.94	10.48	50.42	54.00	-3.58	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

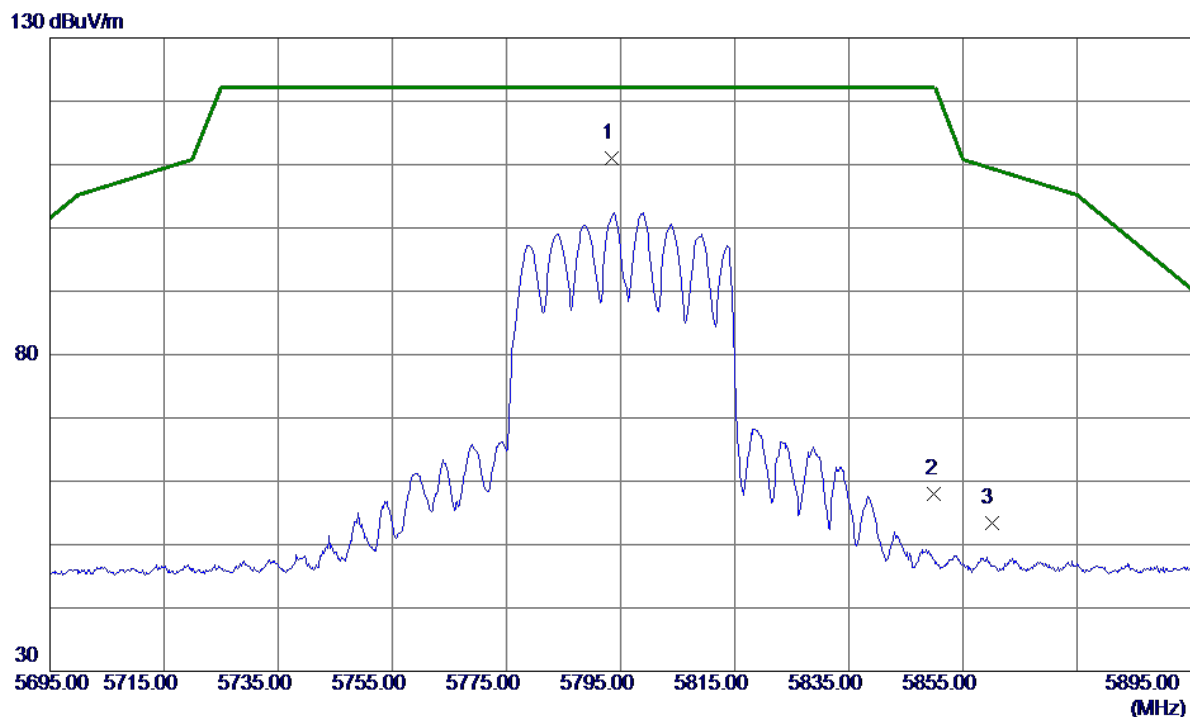


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5793.4000	95.35	15.67	111.02	122.20	-11.18	Peak	No Limit
2	5850.0000	42.13	15.86	57.99	122.20	-64.21	Peak	
3	5860.0000	37.60	15.89	53.49	109.40	-55.91	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

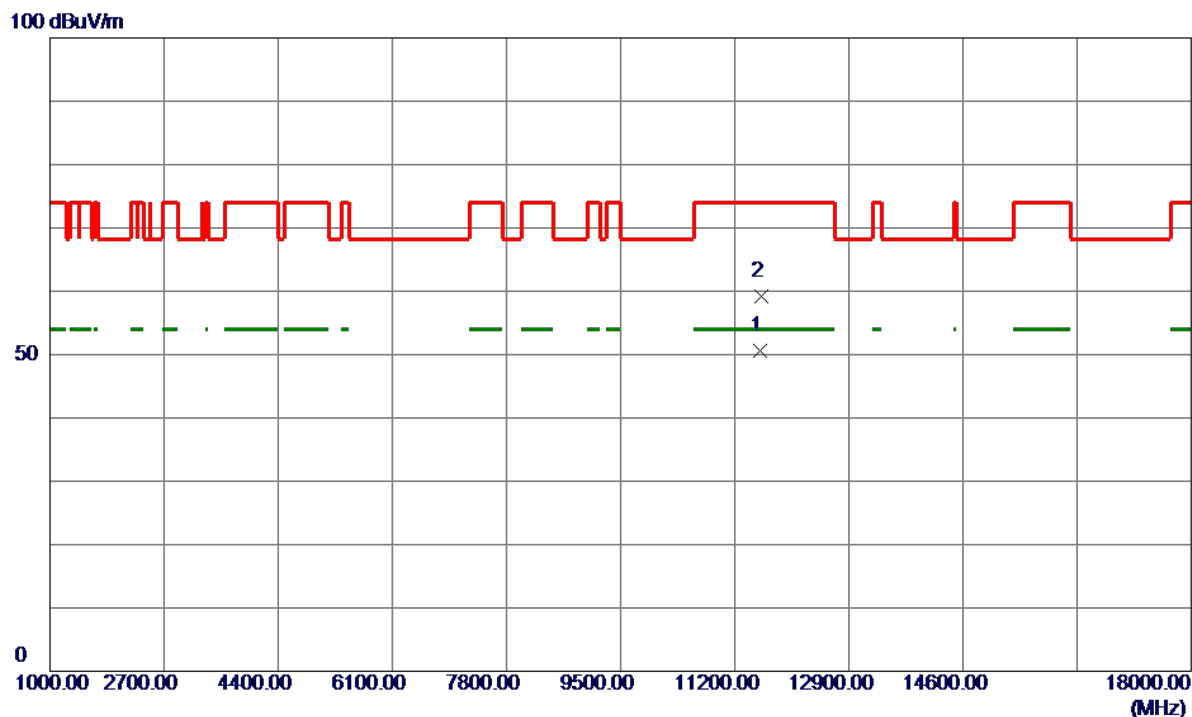


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11582.3000	40.14	10.51	50.65	54.00	-3.35	AVG	
2	11597.2000	48.63	10.52	59.15	74.00	-14.85	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

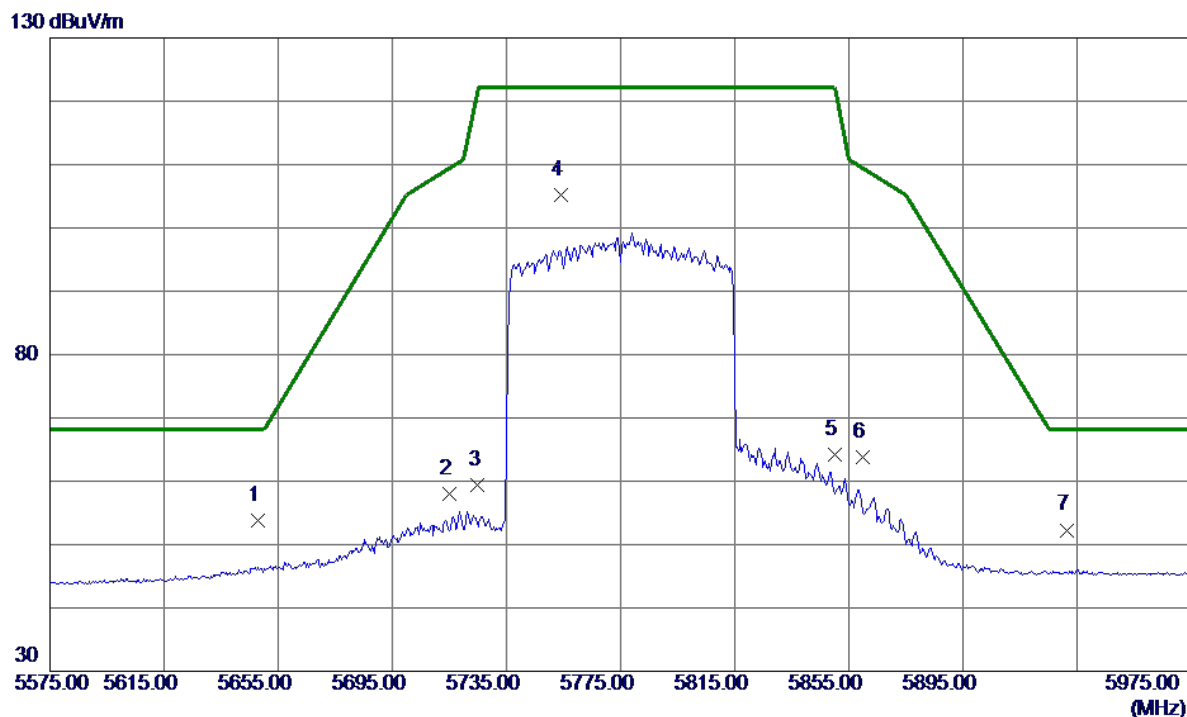


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.8000	38.55	15.20	53.75	68.20	-14.45	Peak	
2	5715.0000	42.66	15.42	58.08	109.40	-51.32	Peak	
3	5725.0000	44.00	15.45	59.45	122.20	-62.75	Peak	
4	5754.2000	89.64	15.55	105.19	122.20	-17.01	Peak	No Limit
5	5850.0000	48.41	15.86	64.27	122.20	-57.93	Peak	
6	5860.0000	47.94	15.89	63.83	109.40	-45.57	Peak	
7	5931.6000	36.18	16.12	52.30	68.20	-15.90	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

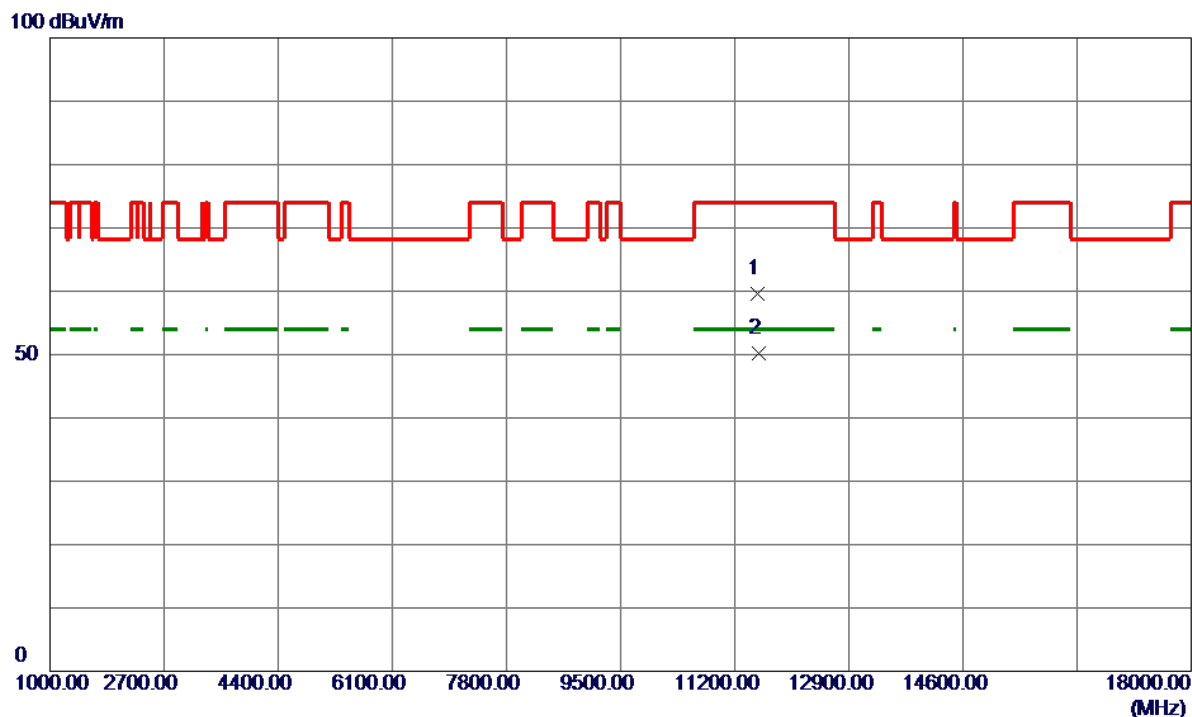

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11537.7000	49.09	10.49	59.58	74.00	-14.42	Peak	
2 *	11557.0500	39.71	10.50	50.21	54.00	-3.79	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

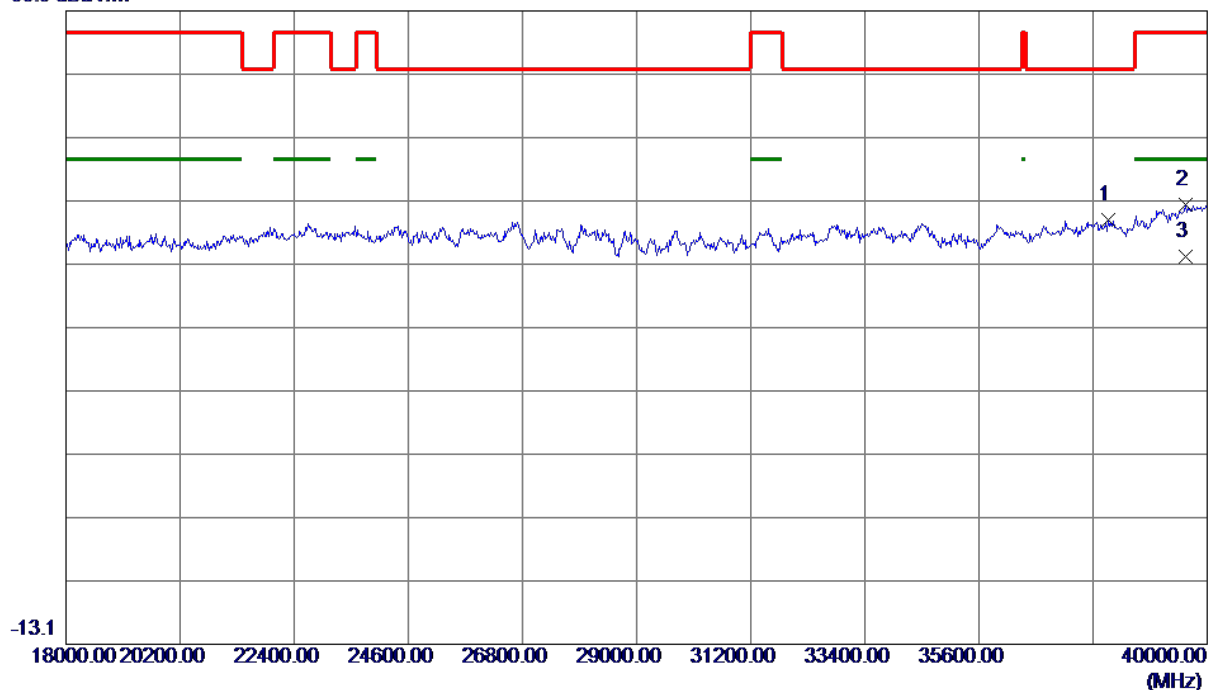


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38086.0000	43.75	10.22	53.97	77.70	-23.73	Peak	
2	39582.0000	42.89	13.35	56.24	83.50	-27.26	Peak	
3 *	39582.0000	34.77	13.35	48.12	63.50	-15.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

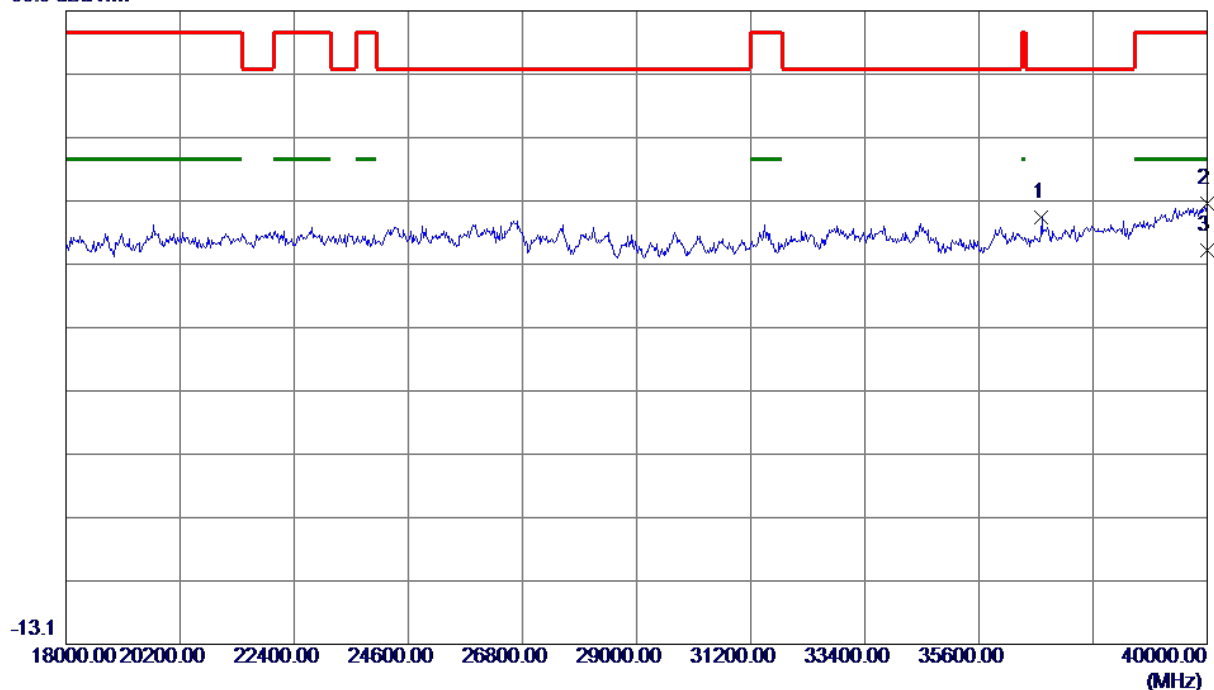

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	36810.0000	45.92	8.35	54.27	77.70	-23.43	Peak	
2	40000.0000	43.19	13.33	56.52	83.50	-26.98	Peak	
3 *	40000.0000	35.78	13.33	49.11	63.50	-14.39	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

The Worst Case:

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

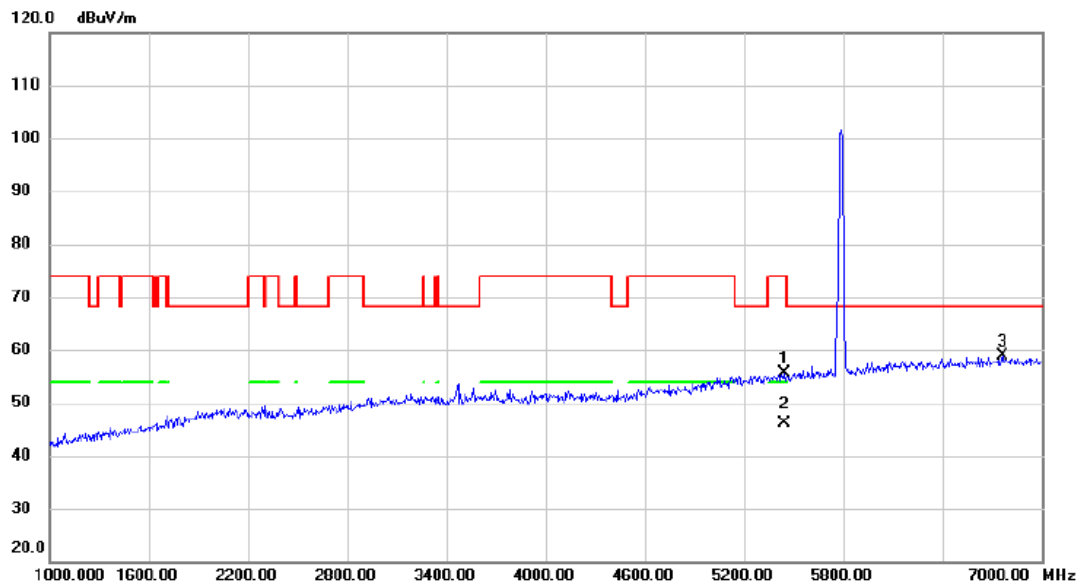


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5440.000	41.15	14.56	55.71	74.00	-18.29	peak	
2	*	5440.000	31.52	14.56	46.08	54.00	-7.92	AVG	
3		6760.000	40.57	18.26	58.83	68.20	-9.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

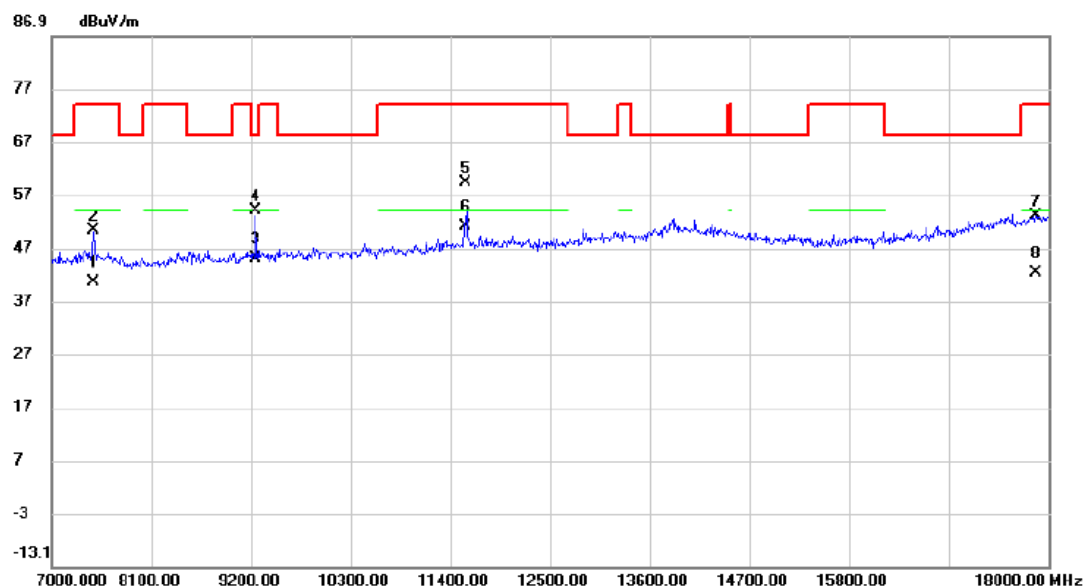

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7461.700	31.21	9.42	40.63	54.00	-13.37	AVG	
2	7463.900	40.91	9.42	50.33	74.00	-23.67	peak	
3	9255.000	35.93	9.12	45.05	68.20	-23.15	AVG	
4	9256.100	44.89	9.12	54.01	68.20	-14.19	peak	
5	11566.950	48.72	10.51	59.23	74.00	-14.77	peak	
6 *	11572.400	40.43	10.50	50.93	54.00	-3.07	AVG	
7	17857.000	41.29	11.62	52.91	74.00	-21.09	peak	
8	17857.000	30.59	11.62	42.21	54.00	-11.79	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.480	16.680
40	5200	23.280	16.680
48	5240	18.600	16.560

CH36

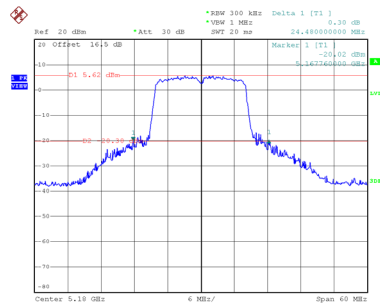


Date: 16.JUL.2026 15:33:13

CH40
26 dB Bandwidth

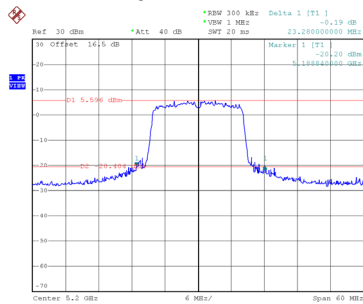


Date: 5.AUG.2026 11:49:17

CH48

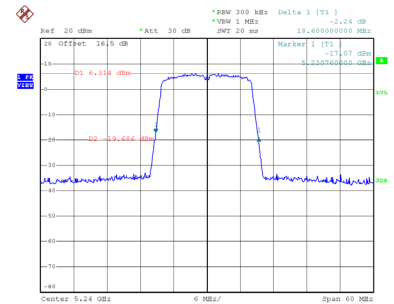


Date: 16.JUL.2026 15:34:52


99 % Occupied Bandwidth

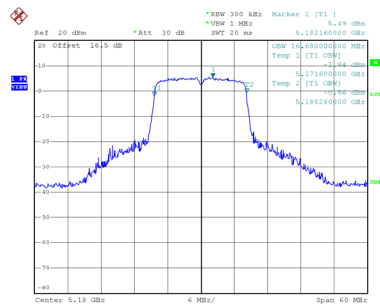

Date: 16.JUL.2026 15:33:26

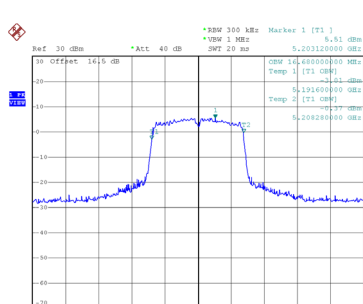

Date: 5.AUG.2026 11:49:30

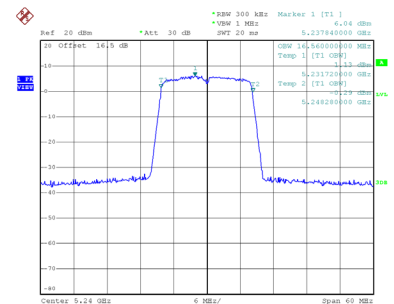


Date: 16.JUL.2026 15:35:04

Test Mode UNII-1_TX BE(EHT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.720	18.960
40	5200	22.800	18.960
48	5240	20.160	18.960

CH36

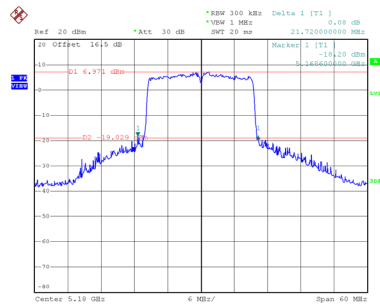


Date: 16.JUL.2026 17:35:19

CH40
26 dB Bandwidth

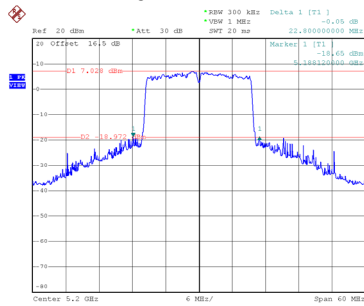


Date: 16.JUL.2026 17:36:43

CH48

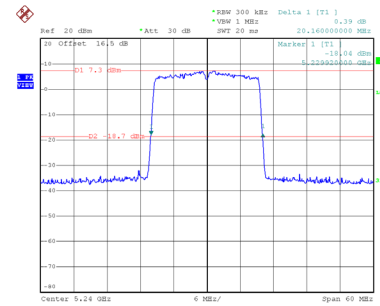


Date: 16.JUL.2026 17:37:33


99 % Occupied Bandwidth

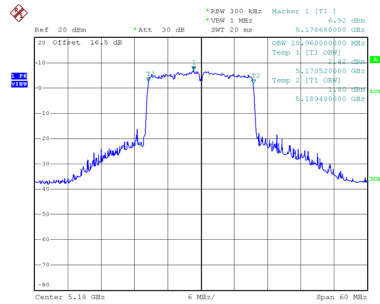

Date: 16.JUL.2026 17:35:31

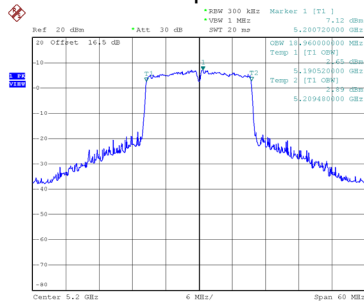

Date: 16.JUL.2026 17:36:55

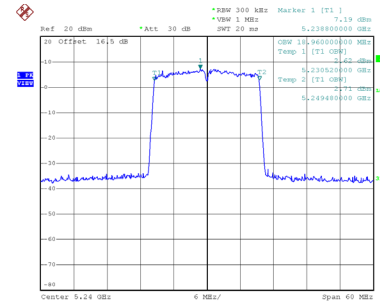


Date: 16.JUL.2026 17:37:45

Test Mode	UNII-1_TX BE(EHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.400	38.000
46	5230	39.400	38.000

CH38

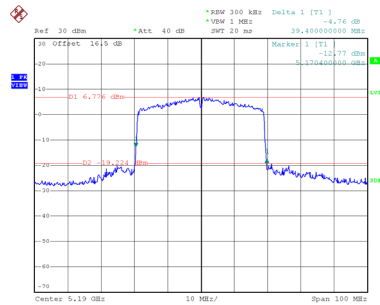


Date: 16.JUL.2026 17:48:10

CH46
26 dB Bandwidth

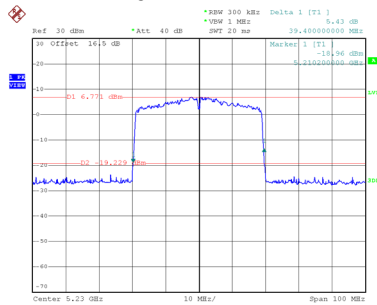


Date: 16.JUL.2026 17:49:34

99 % Occupied Bandwidth

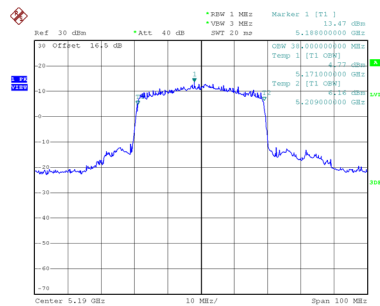

Date: 16.JUL.2026 17:48:22

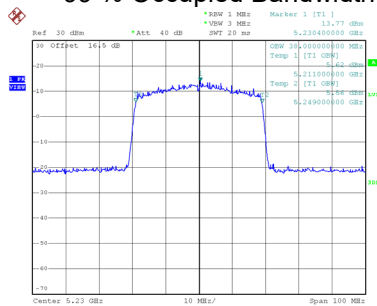


Date: 16.JUL.2026 17:49:47

Test Mode	UNII-1_TX BE(EHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	80.800	77.600

CH42 26 dB Bandwidth

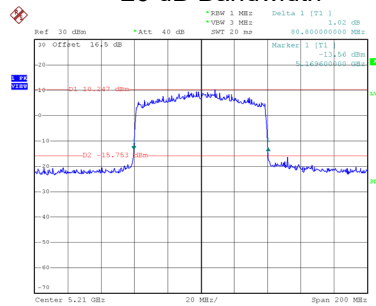

Date: 16.JUL.2026 17:57:22

99 % Occupied Bandwidth

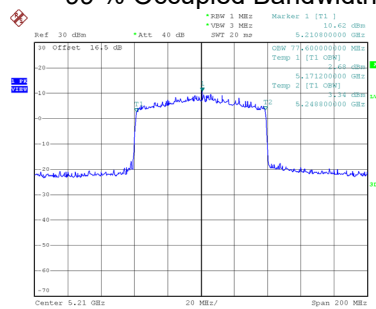


Date: 16.JUL.2026 17:57:34

Test Mode UNII-3_TX A Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.320	16.560	0.5	Pass
157	5785	16.080	16.680	0.5	Pass
165	5825	15.840	16.680	0.5	Pass

CH149

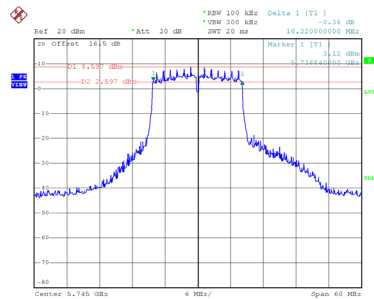


Date: 16.JUL.2026 15:41:12

CH157
6 dB Bandwidth

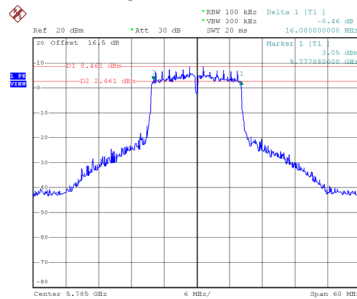


Date: 16.JUL.2026 15:42:18

CH165

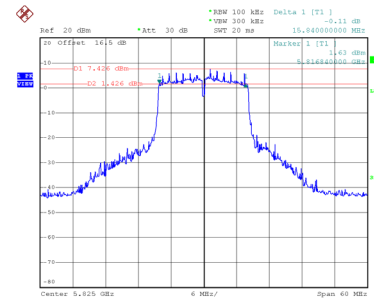


Date: 16.JUL.2026 15:43:05


99 % Occupied Bandwidth

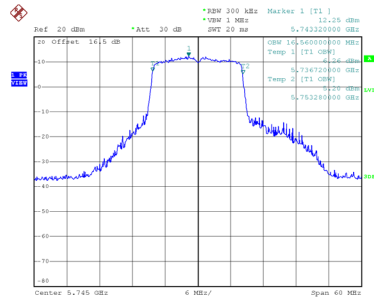

Date: 16.JUL.2026 15:41:25

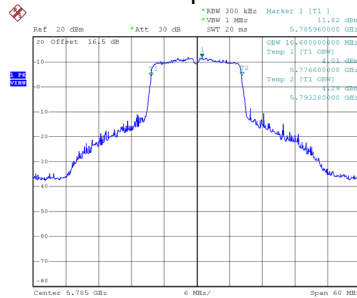

Date: 16.JUL.2026 15:42:30

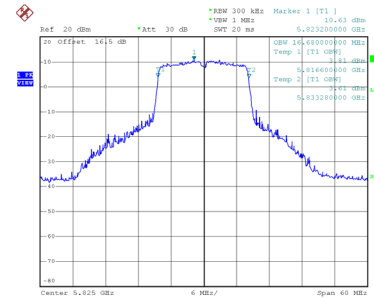

Date: 16.JUL.2026 15:43:18