

Philyra

Multifunctional ANC Meeting Speaker



Model No. : GP-A232B

INSTRUCTION MANUAL


What's in the box

When you unpack, check if the accessories are all included.

1. Speakerphone
2. Charge Cable
3. Bluetooth Dongle




Speakerphone

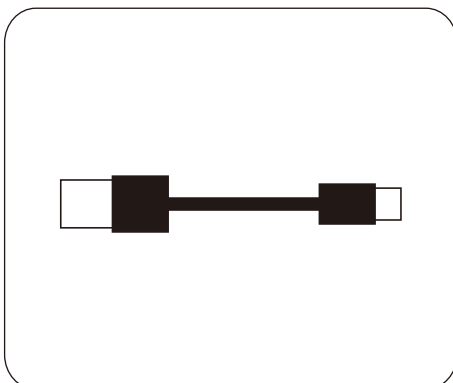

Charge Cable

Product Instructions

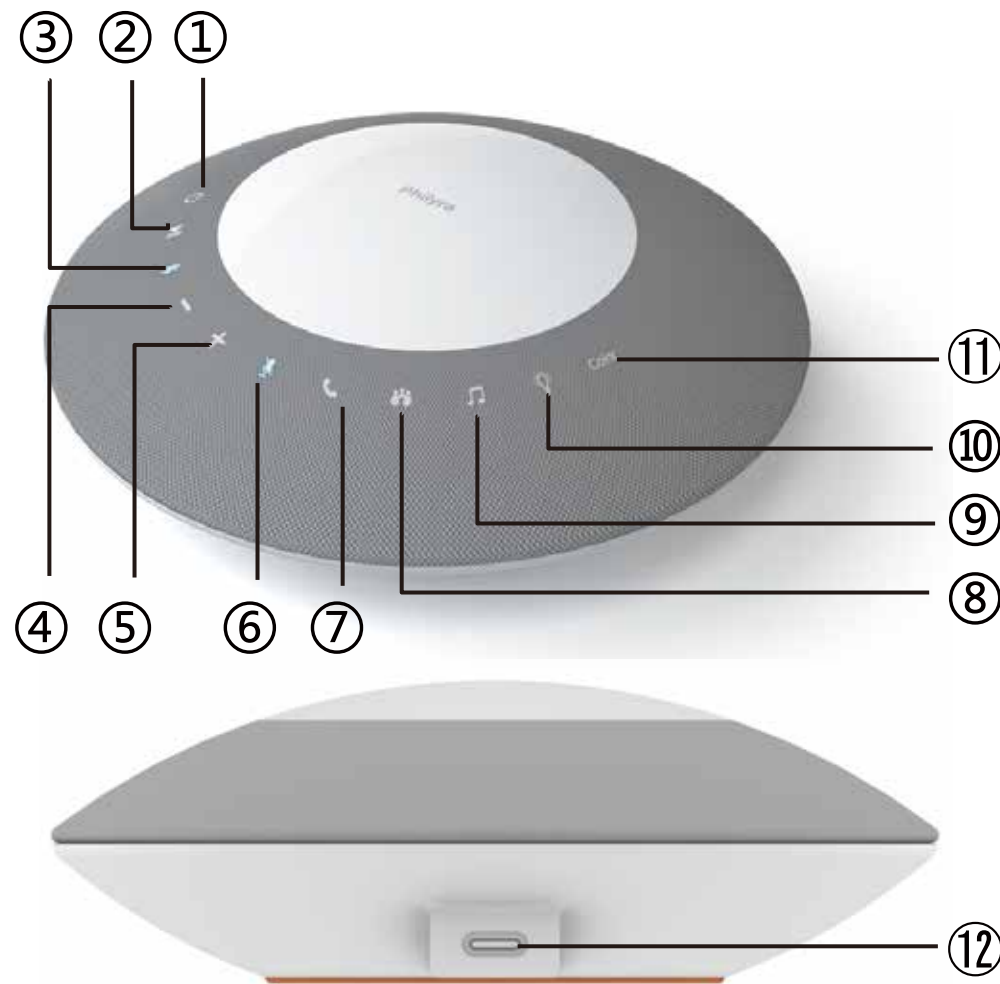

- 1. ON/OFF Button**
- Press and hold the ON/OFF button for two seconds to switch on the device. The light flashes and the speaker says "Power on".
 - Press and hold the ON/OFF button till the speaker says "POWER OFF" and the light turn off.

- 2. PLAY/PAUSE button**
- Press PLAY/PAUSE button once to play or pause the music.

- 3. Bluetooth Button**
- Enable Bluetooth on your device (if it isn't already on).
 - If you've previously paired a different Bluetooth device with this speaker, the speaker will automatically attempt to reconnect to that device when you switch the speaker on. If you want to pair to a new device, press and hold the Bluetooth button on the speaker for 2 seconds until the speaker says "Pairing".
 - Select "GP-232-5126" from the list of Bluetooth devices available.
 - The speaker says "Paring successful. Connected" when it's finished connecting to your smartphone.

Notes: If you don't see AR Santa Clara in the list of Bluetooth devices on your phone, choose "Scan" from your phone's Bluetooth menu. The process of enabling Bluetooth and connecting varies from device to device. See your device's owners' manual for more information and specific instructions.

- 4. Vol - Button**
- When the speaker is in meeting mode or music, press - button to decrease the sound level.
 - When the speaker is music mode, press - button for 2 seconds to Skip backward to the previous track.
 - This speaker has 12 sound level and has light indicator (white color) to show the level of volume. The default sound level is 6.

- 5. Vol + Button**
- When the speaker is in meeting mode or music, press + button to increase the sound level.
 - When the speaker is music mode, press + button for 2 seconds to skip forward to the next track.
 - This speaker has 12 sound level and has light indicator (white color) to show the level of volume. The default sound level is 6.

- 6. MUTE Button**
- It only works when the speaker is in meeting mode.
 - Press the Mute button once to mute the microphone, it shows red light when the speaker is muted. Press the mute button to cancel the mute function.

- 7. Phone button**
- It only works when the speaker is connected to your mobile device.
 - Press the phone button once to answer the call.
 - Press the phone button once to hang up the call.
 - Press and hold the phone button for 2 seconds to decline the call.

- 8. Meeting Mode Button**
- It only works when it is connected to your mobile device/computer.
 - Press the Meeting Mode Button once to activate the auto voice equalizer function.
 - The voice equalizer effect will be auto adjusted to reduce the frequency distortion.

- 9. Music Mode**
- It only works when it is connected to your mobile device/computer.
 - Press the Music Mode Button once to activate the auto music equalizer function.
 - The music equalizer effect will be auto adjusted to reduce the frequency distortion.

- 10. Light Mode Button**
- Mode 1**
- Short press Light Mode Button once to enter color changing mode 1.
- Mode 2**
- Press & hold the Light Mode button for 2 seconds to turn off the light.
- Mode 3**
- Solid Color.
 - Once the speaker is switched on, red color light up
 - Short press the Color button to change and select the color: red, orange, light orange 1, light orange 2, yellow. Light green, green, light blue 1, light blue 2, blue, light purple, purple.
- Mode 4**
- Dance: light follows the beat of music to flash
 - Short press the Color button to change and select the color: red, orange, light orange 1, light orange 2, yellow. Light green, green, light blue 1, light blue 2, blue, light purple, purple.
- Mode 5**
- Color changing 2. Each color will light up for 15 seconds and change the color in the sequence of red, orange, light orange 1, light orange 2, yellow. Light green, green, light blue 1, light blue 2, blue, light purple, purple.
 - Short press the Color button can turn off or resume this color changing mode.
- Mode 6**
- Breathe 1: Light slowly fades up and down in the sequence of blue, red, green.
- Mode 7**
- Breathe 2: Light slowly fades up and down in the sequence of blue, purple, red, orange, yellow, green, blue-green.
- Mode 8**
- Rainbow color 1: 7 colors light up and rotate.
- Mode 9**
- White color breathe mode. White color light slowly fades up and down in cycle.
- Mode 10**
- Rainbow color 2: 7 colors light up and rotate.
- Mode 11**
- Back and forth: color light up from left to right, then, right to left.
 - Short press the Color Button to select the color.
- Mode 12**
- Northern Lights. Light rotates clockwise.
 - Short press the Color Button to select the color.
- Mode 13**
- Flash light 1.
 - Short press the Color Button to select the color.
- Mode 14**
- Color changing 3. Color change slowly.

- Mode 15**
- Flash light 1.
 - Short press the Color Button to select the color.

- 11. Color Button**
- Short press the color button to change/select the color

- 12. Type C Ports**
- Connect with computer to play music
 - Use the USB to Type C cable and connect with 5V/1A adaptor for charging.

Bluetooth

1. Turn on the speake
- 2.The effective operation range between the speaker and your Bluetooth-enabled device is approximately 10 meters.
3. Long Press  the Bluetooth button until the Bluetooth light flashes blue and enter the paring mode when you hear "Paring".
4. Make sure the Bluetooth capability of your device is turned on.
5. Choose "GP-232-5126" from the list of pairing options on your device. When pair successfully, you can hear the voice prompt "Pairing successful, connected"
6. Bluetooth Paring Mode: The Bluetooth light flashes blue for 2 mins til successfully paired. If over 2 mins, the unit will enter "bluetooth standby mode".
7. Connecting with your device automatically. When the speakerphone and phone have been paired once they will automatically connect when the speakerphone is on, you can hear the voice prompt "Connected" when pair successfully.
8. the speakerphone will power off automatically after 10 minutes disconnection. (Voice prompt "Power off").

Other adapters

1. Bluetooth Dongle : Plug the dongle into the USB port of your computer. install Driver.
2. TYPE C: Turn on Bluetooth, Connect the Type-C connector directly to a USB port.

Charge

1. When it's with low battery, it will have voice prompt of "BatteryLow". Please charge the unit when you hear voice prompt to ensure this speakerphone workwell.
2. Take out the charge cable, Connect the USB to 5V/1A power adapter. Connect the Type-C connector to a USB port on speaker.
3. When the light indicator (LED) has a solid red light, your speakerphone is charging.

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 0cm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.

This device in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test suites have been carried out.

1. CAUTION : RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

2. The device complies with RF specifications when the device used at 20mm form your body

BT(BR+EDR) 2402-2480MHz Max Power:3.47dBm
BT(BLE) 2402-2480MHz Max Power:0.32dBm

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna. FCC ID: ZY9-A20060

IC Caution:

- English:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

90 DAYS LIMITED WARRANTY

Shenzhen Tianxingtai Optronics Technology Co., Ltd. (the "Company") warrants to the original retail purchaser of this product that should this product or any part thereof, under normal use and conditions, be proven defective in material or workmanship within 90days from the date of original purchase, such defect(s) will be repaired or replaced with new or reconditioned product (at the Company's option) without charge for parts and repair labor. To obtain repair or replacement within the terms of the warranty, the product is to be delivered with proof of warranty coverage (e.g. dated bill of sale), specification of defect(s), transportation prepaid, to an approved warranty station. For the return address, please scan the QR code on the product or packaging. This Warranty is not transferable and does not cover product purchased, serviced or used outside the United States or Canada. The warranty does not extend to the elimination of externally generated static, noise, or loss of range or audio/ video quality due to external factors, to costs incurred for the installation, removal or reinstallation of the product, or to damage to digital media devices or memory. The warranty does not apply to any product or part thereof which, in the opinion of the company, has suffered or been damaged through alteration, improper installation, mishandling, misuse, neglect, accident or exposure to moisture. This warranty does not apply to damage caused by an AC adapter not provided with the product or by removal or defacement of factory serial number/barcode labels.

THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

This Warranty is in lieu of all other express warranties or liabilities.

ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED TO DURATION OF THIS WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER, INCLUDING ANY IMPLIED WARRANTY, MUST BE BROUGHT WITHIN A PERIOD OF 24 MONTHS FROM THE DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES WHATSOEVER.

No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product. Some states/provinces do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state/province to state/province.

Manufacturer: Shenzhen Great Power Innovation And Technology Enterprise Co.,Ltd
Manufacturer Address: No. 331, No. 335, Guiyue Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen
Distribution: Shenzhen Tianxingtai Optronics Technology Co., Ltd.
Tel: 86-0755-2167 1965