

TEST REPORT

Product Name : Wireless Access Point
Model Number : RG-AP180-PE, RG-AP180-AC,
RG-MA2610-PE, RG-MA2610-AC

Prepared for : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan
Road, Cangshan District, Fuzhou, Fujian, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2510220085W00103R
Date(s) of Tests : November 6, 2025 to January 26, 2026
Date of Issue : January 28, 2026

TABLE OF CONTENTS

1. EUT TECHNICAL DESCRIPTION.....	8
1.1. Product Description.....	8
1.2. Feature of EUT.....	9
2. SUMMARY OF TEST RESULT.....	10
3. TEST METHODOLOGY.....	11
3.1. GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.2. MEASUREMENT EQUIPMENT USED.....	11
4. FACILITIES AND ACCREDITATIONS.....	12
4.1. Facilities.....	12
4.2. Equipment.....	12
4.3. Laboratory accreditations and listings.....	12
5. TEST SYSTEM UNCERTAINTY.....	13
6. SUPPORT EQUIPMENT.....	14
7. DFS RULE REQUIREMENTS.....	15
7.1. OPERATION MODE AND REQUIRED TEST ITEMS.....	15
7.2. LIMITS AND RADAR SIGNAL PARAMETERS.....	15
7.2.1. Interference Threshold Values.....	15
7.2.2. DFS Response Requirement Values.....	15
7.2.3. Radar Test Waveforms.....	15
8. DYNAMIC FREQUENCY SELECTION TEST.....	17
8.1. Conducted Method System Block Diagram.....	17
8.2. Calibration of DFS Detection Threshold Level Block Diagram.....	17
9. TEST RESULTS.....	18
9.1. Channel Availability Check Time.....	18
9.2. Channel Closing Transmission and Channel Move Time.....	21
9.3. Non-occupancy Period.....	22
9.4. DFS Detection Threshold.....	23
9.5. Radar Detection Probability.....	28
10. APPENDIX 1-PHOTOGRAPHS OF TEST SETUP.....	33

Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2510220085W00103R	/	Original Report

TEST RESULT CERTIFICATION

Applicant : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, CangshanDistrict, Fuzhou, Fujian, China
Manufacturer : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, CangshanDistrict, Fuzhou, Fujian, China
EUT : Wireless Access Point
RG-AP180-PE, RG-AP180-AC, RG-MA2610-PE, RG-MA2610-AC
Model Name : (Note: The EUT has 4 models as the page 5 model difference description in the report, all models are tested, and find the RG-AP180-PE is the worst, so only the worst data is shown in the report.)
Trademark : **Ruijie**

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
Item 19-3 of Article 2 Paragraph 1	PASS

The device described above is tested by SHENZHEN EMTEK , CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and SHENZHEN EMTEK CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the above table standards requirement. This report applies to above tested sample only and shall not be reproduced in part without written approval of SHENZHEN EMTEK CO., LTD.

Date of Test : November 6, 2025 to January 26, 2026
Prepared by : Yu Xiaolan
Yu Xiaolan/Editor
Reviewer : Xia Lili
Xia Lili/Supervisor
Approved & Authorized Signer : Wang Li
Wang Li/Manager



Model difference description:

	Difference Description
RG-AP180-PE	1. Different from the power board, the power supply mode of RG-AP180(JA) is 100 ~ 120V AC power supply. 2. The antenna size and specification are slightly different, and the antenna assembly position is changed. 3. The appearance of the side of the upper cover is slightly different. 4. Differences in the appearance of the bottom shell. 5. BCM6755, a new supporting chip for CPU B
RG-AP180-AC	1. The antenna size and specification are slightly different, and the antenna assembly position is changed. 2. The appearance of the side of the upper cover is slightly different. 3. BCM6755, a new supporting chip for CPU B.
RG-MA2610-AC	1. The antenna size and specification are slightly different, and the antenna assembly position is changed. 2. The appearance of the side of the upper cover is slightly different. 3. The Flash model is different. 4. 5G FEM model is different.
RG-MA2610-PE	1. Different from the power board, the power supply mode of RG-AP180(JA) is 100 ~ 120V AC power supply. 2. The antenna size and specification are slightly different, and the antenna assembly position is changed. 3. The appearance of the side of the upper cover is slightly different 4. The appearance of the bottom shell is different. 5. The Flash model is different. 6. 5G FEM model is different.

	RG-AP180-PE (Version: V2.00)
RG-AP180-PE	1. Two supporting schemes are added for the internal heat dissipation plate. 2. The internal structure of the upper cover is slightly different, and two screw columns are added. 3. CPU switch to BCM6755. 4. Changed PHY to YT8521SC. 5. FEM model is different.

	RG-AP180-AC (Version: V2.00)
RG-AP180-AC	1. One supporting scheme is added to the internal heat dissipation plate. 2. The internal appearance of the upper cover is slightly different, and two screw posts are added. 3. CPU switch to BCM6755. 4. Changed PHY to YT8521SC. 5. 5G FEM model is different. 6. Added new power board. (Model: RA008W01-0332400, Factory: RISUNIC Technology (ShenZhen) Co., Ltd.)

	RG-AP180-PE (Version: 3.00)
RG-AP180-PE (Version: V2.00)	- Flash: W25Q512JVFSQ changed to W25N01GVZEJR. - CPU: BCM6755 changed to BCM6756. - Added the new PoE power board.
	RG-AP180-AC (Version: V3.00)
RG-AP180-AC (Version: V2.00)	- Flash: W25Q512JVFSQ changed to W25N01GVZEJR. - CPU: BCM6755 changed to BCM6756.
	RG-MA2610-AC (Version: V2.00)
RG-AP180-AC (Version: V2.00)	- Flash: W25Q512JVFSQ changed to W25N01GVZEJR. - CPU: BCM6755 changed to BCM6756.
	RG-MA2610-PE (Version: V2.00)
RG-AP180-PE (Version: V2.00)	- Flash: W25Q512JVFSQ changed to W25N01GVZEJR. - CPU: BCM6755 changed to BCM6756. - Added the new PoE power board.
	RG-MA2610-PE (Version: V2.10)
RG-MA2610-PE (Version: V2.00)	Upper cover: Changed to frosted surface. Lower cover: Changed to a frosted surface, with upper cover fixing holes on both sides.
	RG-MA2610-AC (Version: V2.10)
RG-MA2610-AC (Version: V2.00)	Upper cover: Changed to frosted surface. Lower cover: Changed to a frosted surface, with upper cover fixing holes on both sides.
	RG-AP180-PE (Version: 3.20)
RG-AP180-PE (Version: 3.00)	Upper cover: Changed to frosted surface. Lower cover: Changed to a frosted surface, with upper cover fixing holes on both sides.
	RG-AP180-AC (Version: V3.20)
RG-AP180-AC (Version: V3.00)	Upper cover: Changed to frosted surface. Lower cover: Changed to a frosted surface, with upper cover fixing holes on both sides.
	RG-AP180-PE (Version: V4.10)
RG-AP180-PE (Version: V3.20)	- AN8801SB: U143 supports 802.3 PHY, 1000BASE-T, 100 BASE-TX and 10 BASE-T. And a 25MHz external crystal oscillation is required. - VC5755-31, 5G FEM, U2, U3, is used to amplify the WiFi signal of 5G and control the signal transmit. - Added 160MHz bandwidth.
	RG-AP180-AC (Version: V4.10)
RG-AP180-AC (Version: V3.20)	- AN8801SB: U143 supports 802.3 PHY, 1000BASE-T, 100 BASE-TX and 10 BASE-T. And a 25MHz external crystal oscillation is required. - VC5755-31, 5G FEM, U2, U3, is used to amplify the WiFi signal of 5G and control the signal transmit. - Added 160MHz bandwidth. - The power board is changed to a 2-layer board, the integrated isolation is changed to a discrete isolation, thermal conductivity adjustment, Mylar

	sheet adjustment, power cover adjustment.
	RG-MA2610-PE (Version: V4.10)
RG-MA2610-PE (Version: V2.10)	1. AN8801SB: U143 supports 802.3 PHY, 1000BASE-T, 100 BASE-TX and 10 BASE-T. And a 25MHz external crystal oscillation is required. 2. VC5755-31, 5G FEM,U2,U3, is used to amplify the WiFi signal of 5G and control the signal transmit. 3. Added 160MHz bandwidth.
	RG-MA2610-AC (Version: V4.10)
RG-MA2610-AC (Version: V2.10)	1. AN8801SB: U143 supports 802.3 PHY, 1000BASE-T, 100 BASE-TX and 10 BASE-T. And a 25MHz external crystal oscillation is required. 2. VC5755-31, 5G FEM,U2,U3, is used to amplify the WiFi signal of 5G and control the signal transmit. 3. Added 160MHz bandwidth. 4. The power board is changed to a 2-layer board, the integrated isolation is changed to a discrete isolation, thermal conductivity adjustment, Mylar sheet adjustment, power cover adjustment.
	RG-AP180-PE (Version: V4.70)
RG-AP180-PE (Version: V3.20)	1. CPU: BCM6756 changed to BCM47623A
	RG-AP180-AC (Version: V4.70)
RG-AP180-AC (Version: V3.20)	1. CPU: BCM6756 changed to BCM47623A 2. Added new power board. (Model:,Factory: OP-R1680330240NA01 AMC Technology (ShenZhen) Co., Ltd.) 3. Added new power board. (Model: G1851,Factory:GOSPELL Technology (ShenZhen) Co., Ltd.)

1. EUT TECHNICAL DESCRIPTION

1.1. Product Description

WIFI Type:	WIFI 5G with 5150MHz-5250MHz Band WIFI 5G with 5250MHz-5350MHz Band
WLAN Supported:	802.11a 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth) 802.11ac(20MHz channel bandwidth) 802.11ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth) 802.11ac(160MHz channel bandwidth) 802.11ax(20MHz channel bandwidth) 802.11ax(40MHz channel bandwidth) 802.11ax(80MHz channel bandwidth) 802.11ax(160MHz channel bandwidth)
Modulation:	OFDM, OFDMA
Operating Frequency Range:	WIFI 5G with 5150MHz-5250MHz Band: 5180-5240MHz for 802.11a 5180-5240MHz for 802.11n(HT20) 5190-5230MHz for 802.11n(HT40) 5180-5240MHz for 802.11ac(HT20) 5190-5230MHz for 802.11ac(HT40) 5210MHz for 802.11ac(HT80) 5180-5240MHz for 802.11ax(HT20) 5190-5230MHz for 802.11ax(HT40) 5210MHz for 802.11ax(HT80) WIFI 5G with 5250MHz-5350MHz Band: 5260-5320MHz for 802.11a 5260-5320MHz for 802.11n(20) 5270-5310MHz for 802.11n(40) 5260-5320MHz for 802.11ac(20) 5270-5310MHz for 802.11ac(40) 5290MHz for 802.11ac(80) 5250MHz for 802.11ac(160) 5260-5320MHz for 802.11ax(20) 5270-5310MHz for 802.11ax(40) 5290MHz for 802.11ax(80) 5250MHz for 802.11ax(160)
Smart System:	MIMO
Beamforming:	Support
TPC Function:	Not Support
Power Supply:	AC 110V/60Hz by POE (Note: The EUT can be powered through two methods, AC power or PoE, pre testing all power supplies, and find the PoE is the worst, so only the worst data is shown in the report.)
Temperature Range:	0℃~40℃

1.2. Feature of EUT

a) Antenna information

Specification	Antenna	Brand	Model	Antenna Type	Gain
2.4G WIFI	1	/	/	Integrated Antenna	3.48dBi
2.4G WIFI	2	/	/	Integrated Antenna	3.45dBi
5G WIFI	1	/	/	Integrated Antenna	4.79dBi
5G WIFI	2	/	/	Integrated Antenna	5.66dBi
5G WIFI	Beamforming	/	/	/	0.5dBi

Note: The antenna information provided by the manufacturer will have a certain impact on the test results.

b) Modification Record

There were no modifications required for compliance.

c) For more details, please refer to the user's manual of the EUT.

2. SUMMARY OF TEST RESULT

Standard	Test Parameter	Verdict	Remark
Item 19-3 of Article 2 Paragraph 1	Channel Availability Check Time	PASS	
	Channel Move Time	PASS	
	Channel Closing Transmission Time	PASS	
	Non-occupancy Period	PASS	

3. TEST METHODOLOGY

3.1. GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
Item 19-3 of Article 2 Paragraph 1
ARIB STD-T71 Ver.6.1 Section 3
MIC Notice No.88 Annex45

3.2. MEASUREMENT EQUIPMENT USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval	Calibration Body	Calibration Method
Wideband Radio Communication Tester	R&S	CMW500	171168	2025/9/9	1Year	LISAI	(c)
Frequency Extender	R&S	CMW-Z800A	100430	2025/9/9	1Year	LISAI	(c)
Spectrum Analyzer	R&S	FSV3044	101289	2024/12/17 2025/12/16	1Year	LISAI	(c)
Analog Signal Generator	R&S	SMB100A	183237	2025/9/9	1Year	LISAI	(c)
Vector Signal Generator	R&S	SMM100A	101808	2025/9/9	1Year	LISAI	(c)
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2025/9/9	1Year	LISAI	(c)
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2025/5/10	1 Year	LISAI	(c)
DC Power Supply	KEYSIGHT	E3642A	MY53030016	2025/9/9	1 Year	LISAI	(c)

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992).
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c).
- From JRL Article 24-2, paragraph 4, Item 2.

4. FACILITIES AND ACCREDITATIONS

4.1. Facilities

All measurement facilities used to collect the measurement data are located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4.2. Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.3. Laboratory accreditations and listings

Site Description EMC Lab.	: The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)
3m Chamber #1	: Certificated by VCCI, Japan Registration No.: R-12777 Registration No.: G-20141
10m Chamber	: Certificated by VCCI, Japan Registration No.: R-14410
Shielding Room #1	: Certificated by VCCI, Japan Registration No.: C-13065 Registration No.: T-11318
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong, Industry Zone, Nanshan District, Shenzhen, Guangdong, China

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Timing (Channel move time, aggregate transmission time)	Timing resolution $\pm 0.24\%$
Timing (non occupancy period)	5 seconds
DFS Threshold (conducted)	$\pm 1 \text{ dBm}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

6. SUPPORT EQUIPMENT

POE : Model: EWPAM1NPOE
Input: 100-240V~50/60Hz
Output: 48V, 0.74A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7. DFS RULE REQUIREMENTS

7.1. OPERATION MODE AND REQUIRED TEST ITEMS

The manufacturer states that the UUT is capable of operating as a master.

Requirement	Operational Mode
Channel Availability Check Time	Yes
Channel Move Time	Yes
Channel Closing Transmission Time	Yes
Non-occupancy Period	Yes

7.2. LIMITS AND RADAR SIGNAL PARAMETERS

7.2.1. Interference Threshold Values

Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
EIRP $\geq$ 200 milliwatt	-64 dBm + absolute gain of receiver antenna (dBi)
EIRP < 200 milliwatt	-62 dBm + absolute gain of receiver antenna (dBi)

7.2.2. DFS Response Requirement Values

DFS Response requirement values

Parameter	Value
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	260 milliseconds
Non-occupancy Period	Minimum 30 minutes

7.2.3. Radar Test Waveforms

W53: Parameters DFS radar test signal

Test Signal (#)	Pulse width [μ s]		Pulse repetition frequency PRF [Hz]		Pulses per burst [PPB]	Detection Probability (%)
	Min	Max	Min	Max		
1	0.5	5	200	1000	10	≥ 60
2	0.5	15	200	1600	15	≥ 60
3	0.5	5	200	1000	$\min\{\max\{22, [0.026 \times \text{PRF}]\}, 30\}$	≥ 60
4	0.5	15	200	1600	$\min\{\max\{22, [0.026 \times \text{PRF}]\}, 30\}$	≥ 60
5	0.5	1.5	1114	1118	30	≥ 60
6	0.5	1.5	928	932	25	≥ 60
7	0.5	1.5	886	890	24	≥ 60

8	0.5	1.5	738	742	20	≥60
---	-----	-----	-----	-----	----	-----

W56: Un-modulation Parameters DFS radar test signal

Test Signal (#)	Pulse width [μs]	Pulse repetition frequency PRF [Hz]	Pulses per burst [PPB]	Detection Probability (%)
1	0.5	720	18	≥60
2	1.0	700	18	≥60
3	2.0	250	18	≥60
4	1~5 (step 1)	200-500 (step 1)	23~29	≥60
5	6~10 (step 1)	2000-5000 (step 1)	16~18	≥60
6	11~20 (step 1)	2000-5000 (step 1)	12~16	≥60


W56: Chirp Modulation (5~20MHz) Parameters DFS radar test signal

Test Signal (#)	Pulse width [μs]	Pulse repetition frequency PRF [Hz]	Number of Pulses per Burst	Number of Bursts	Detection Probability (%)
7	50-100 (step 1)	500-1000 (step 1)	1-3	8-20	≥80

W56: 5250-5724 MHz Frequency Hopping Modulation Parameters DFS radar test signal

Test Signal (#)	Pulse width [μs]	Pulse repetition frequency PRF [Hz]	Number of Pulses per Burst	Number of Bursts	Detection Probability (%)
8	1	3000	9(3ms)	300	≥70

8.1. Conducted Method System Block Diagram



1. 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the UUT and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62 dBm as measured on the spectrum analyzer.
2. Without changing any of the instrument settings, the spectrum analyzer is reconnected to the port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.
3. The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the UUT. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the UUT.
4. Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


9. TEST RESULTS

9.1. Channel Availability Check Time

NOTE: All the modulation modes were tested, the data of the worst mode are described in the table.


(1) Initial CAC

TestMode	Frequency[MHz]	Result	Verdict
11A	5260	See test Graph	PASS
11A	5500	See test Graph	PASS

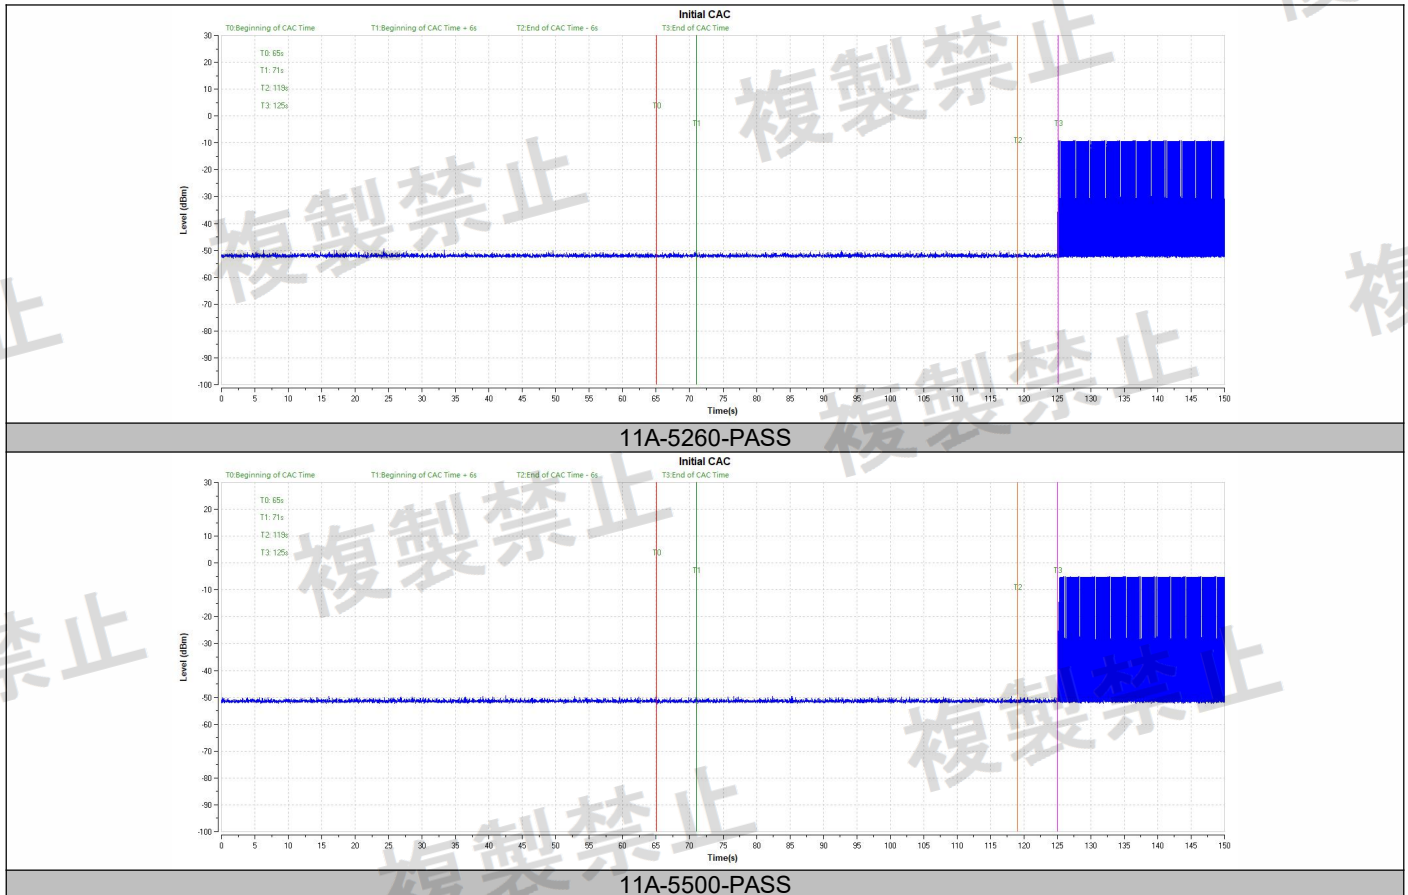



(2) Beginning of CAC

TestMode	Frequency[MHz]	Result	Verdict
11A	5260	See test Graph	PASS
11A	5500	See test Graph	PASS

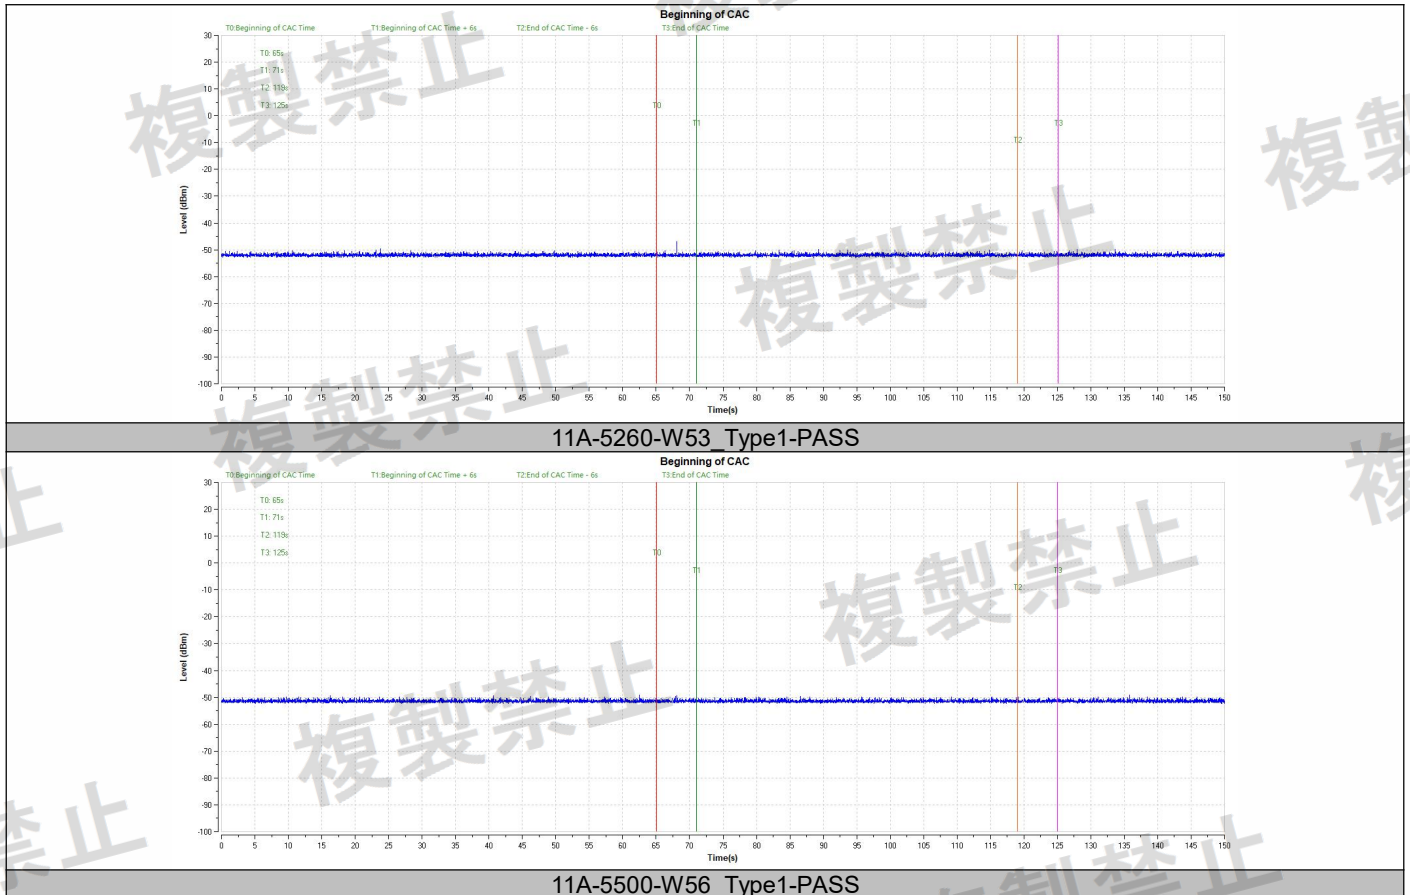

(3) End of CAC


TestMode	Frequency[MHz]	Result	Verdict
11A	5260	See test Graph	PASS
11A	5500	See test Graph	PASS

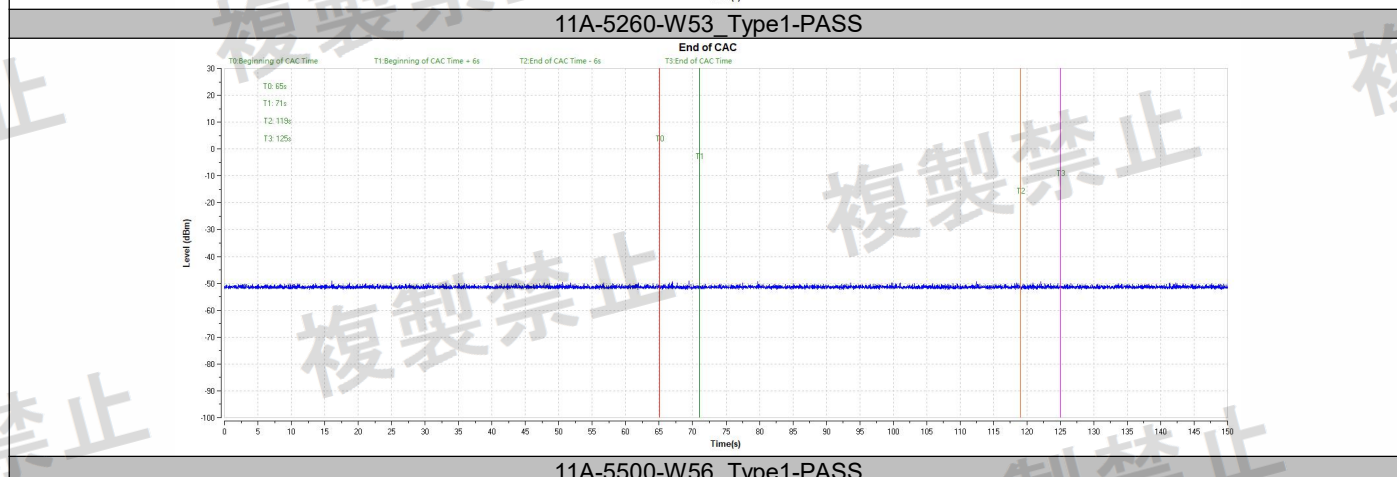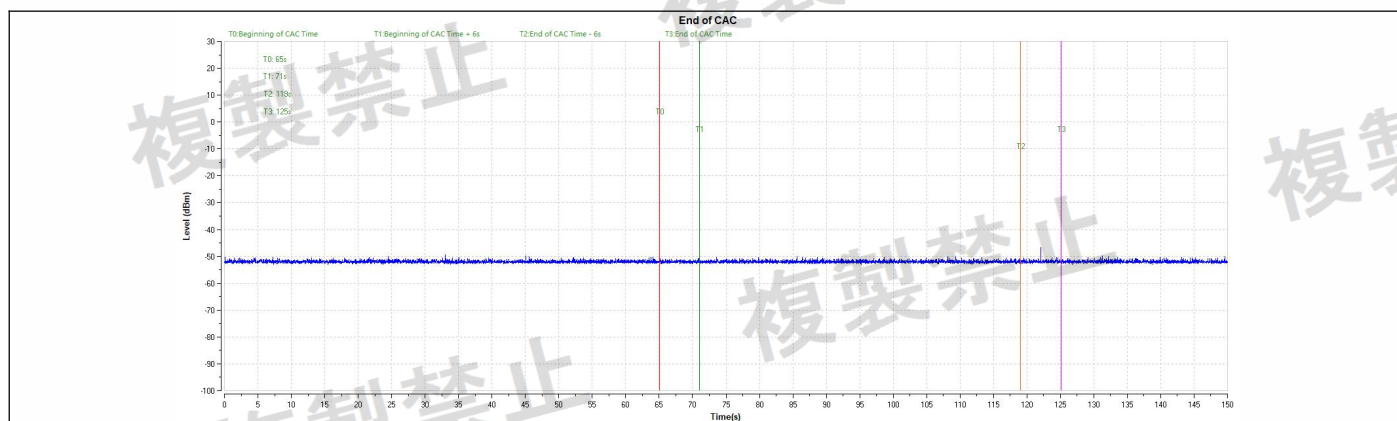


9.2.Channel Closing Transmission and Channel Move Time

NOTE: All the modulation modes were tested, the data of the worst mode are described in the table.

TestMode	Frequency[MHz]	Radar Type	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11A	5260	W53_Type1	50.7	260	839.5	10000	PASS
11A	5500	W56_Type1	98.8	260	979.9	10000	PASS

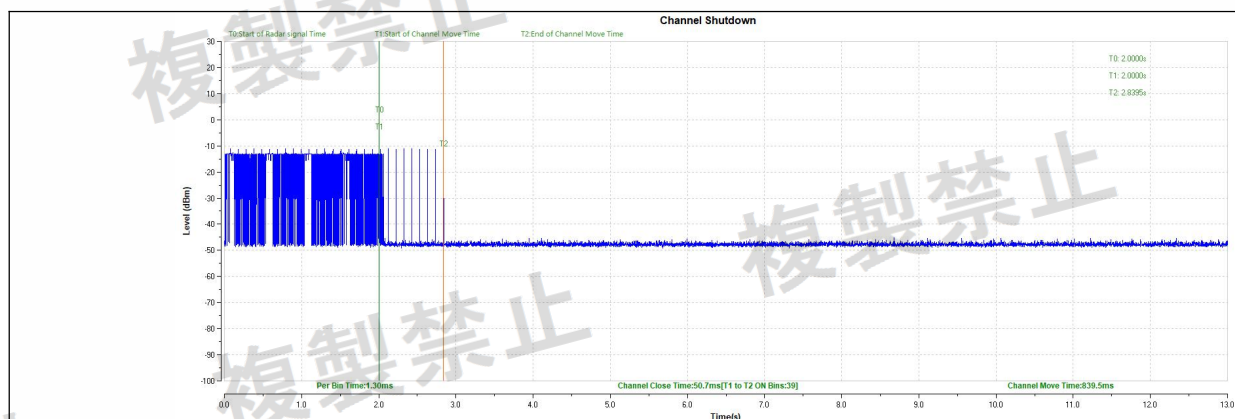

11A-5260-W53_Type1-PASS

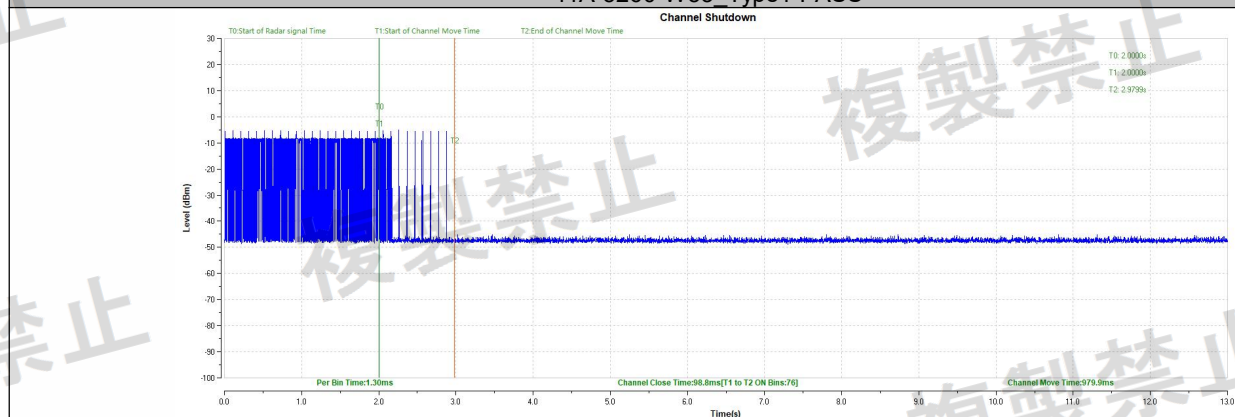


11A-5500-W56_Type1-PASS

9.3. Non-occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

NOTE: All the modulation modes were tested, the data of the worst mode are described in the table.

TestMode	Frequency[MHz]	Radar Type	Result	Limit[s]	Verdict
11A	5260	W53_Type1	see test graph	≥1800	PASS
11A	5500	W56_Type1	see test graph	≥1800	PASS

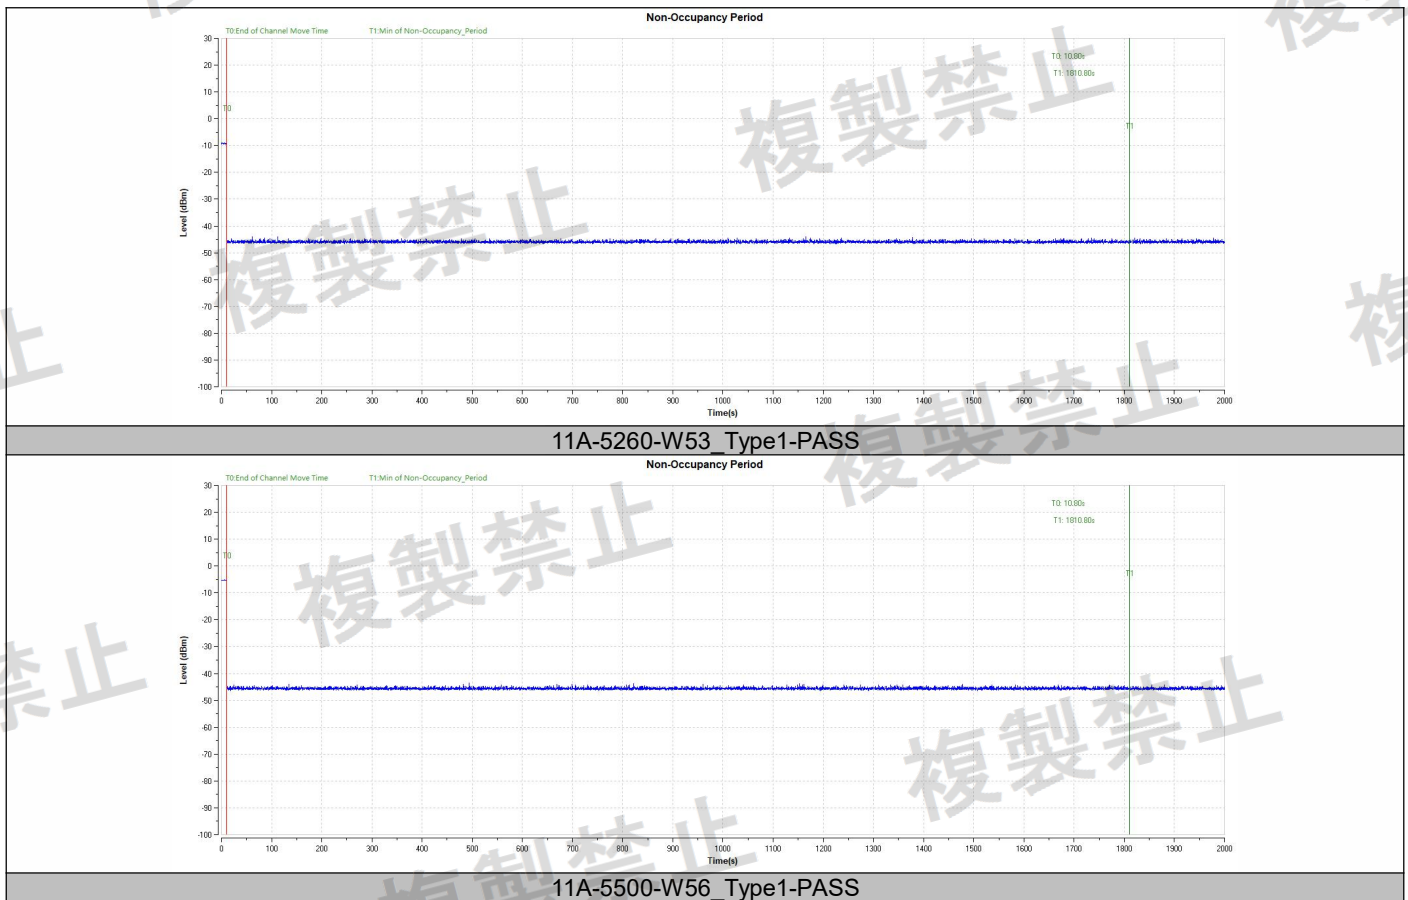


9.4.DFS Detection Threshold


NOTE: All the modulation modes were tested, the data of the worst mode are described in the table.

Radar Waveform Calibration Result:


TestMode	Frequency[MHz]	Radar Type	Result	Limit[dbm]
11A	5260	W53_Type1	-57.51	-57.21
11A	5260	W53_Type2	-57.39	-57.21
11A	5260	W53_Type3	-57.30	-57.21
11A	5260	W53_Type4	-57.29	-57.21
11A	5260	W53_Type5	-57.27	-57.21
11A	5260	W53_Type6	-57.58	-57.21
11A	5260	W53_Type7	-57.26	-57.21
11A	5260	W53_Type8	-57.24	-57.21
11A	5500	W56_Type1	-57.56	-57.21
11A	5500	W56_Type2	-57.58	-57.21
11A	5500	W56_Type3	-57.27	-57.21
11A	5500	W56_Type4	-57.52	-57.21
11A	5500	W56_Type5	-57.47	-57.21
11A	5500	W56_Type6	-57.35	-57.21
11A	5500	W56_CR	-57.36	-57.21
11A	5500	W56_FH	-57.42	-57.21

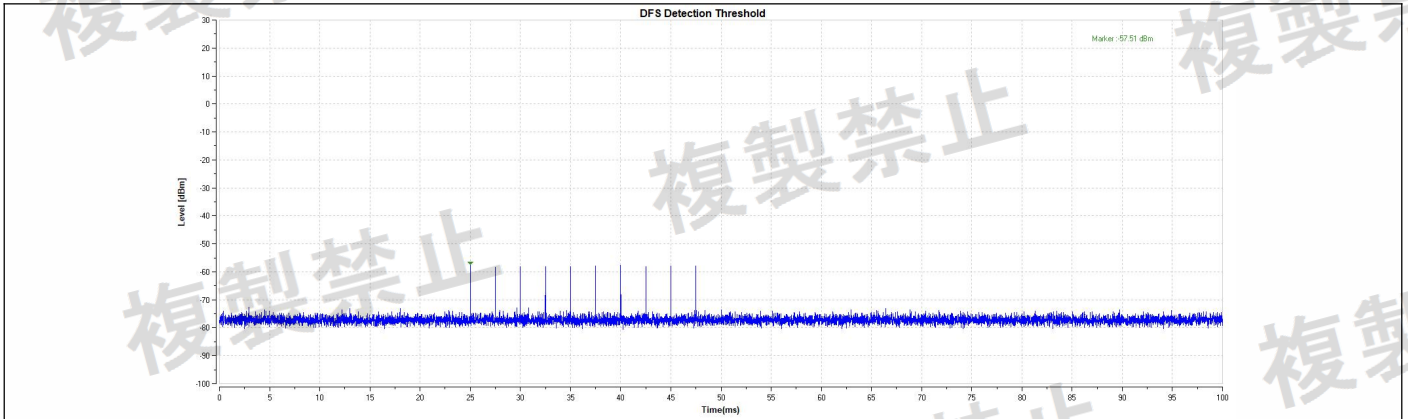


11A-5260-W53_Type1-PASS

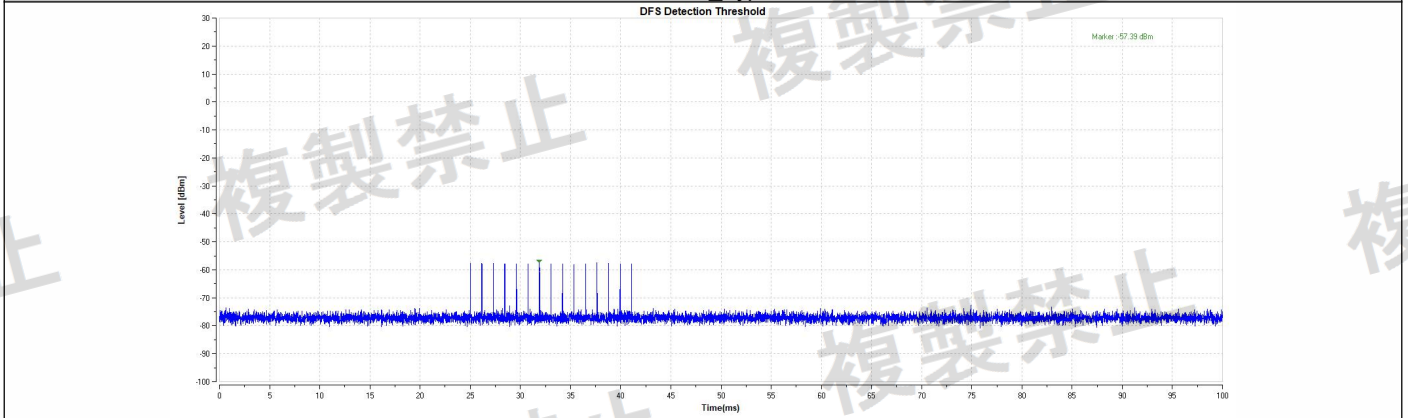


11A-5260-W53_Type2-PASS

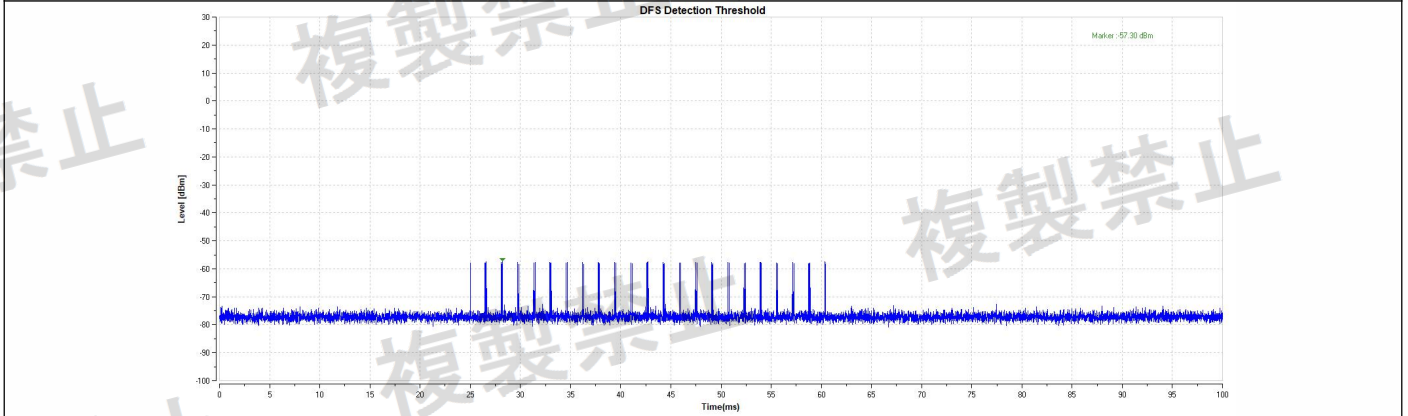


11A-5260-W53_Type3-PASS

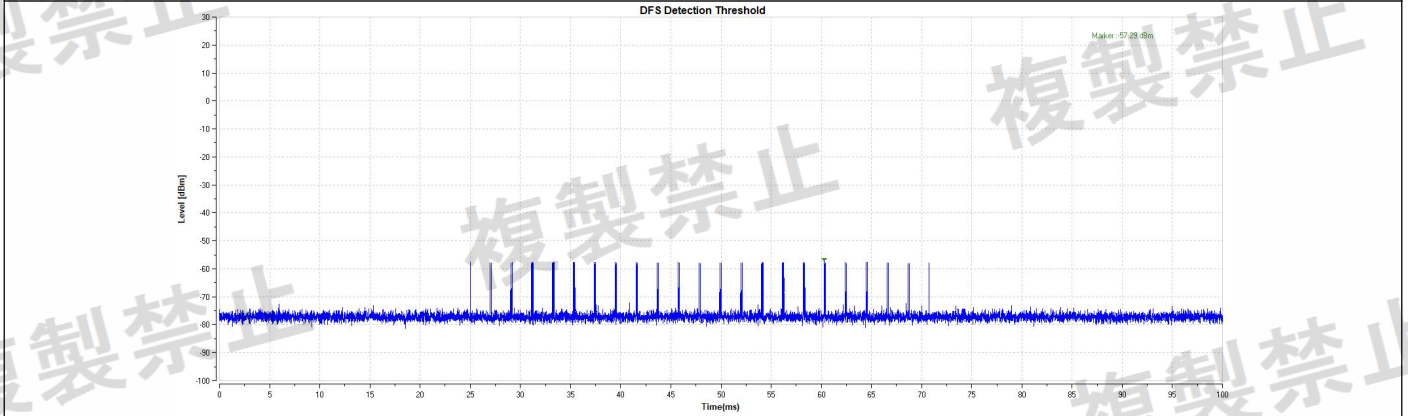


11A-5260-W53_Type4-PASS

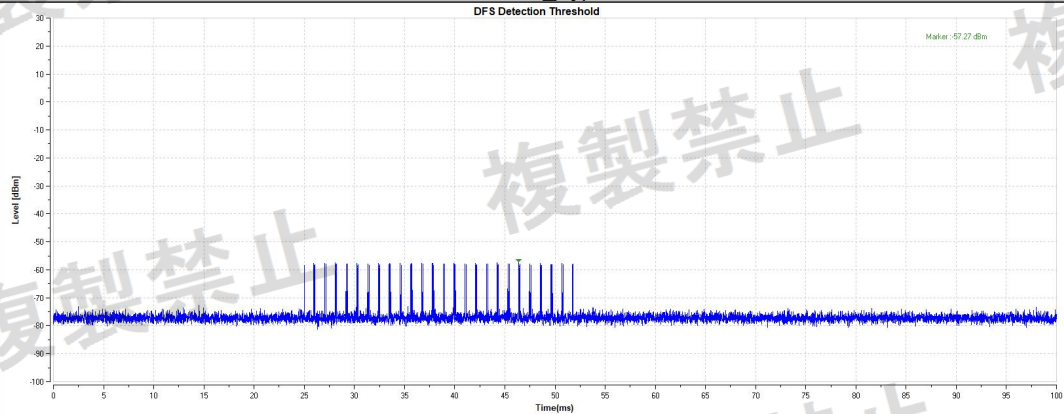


11A-5260-W53_Type5-PASS

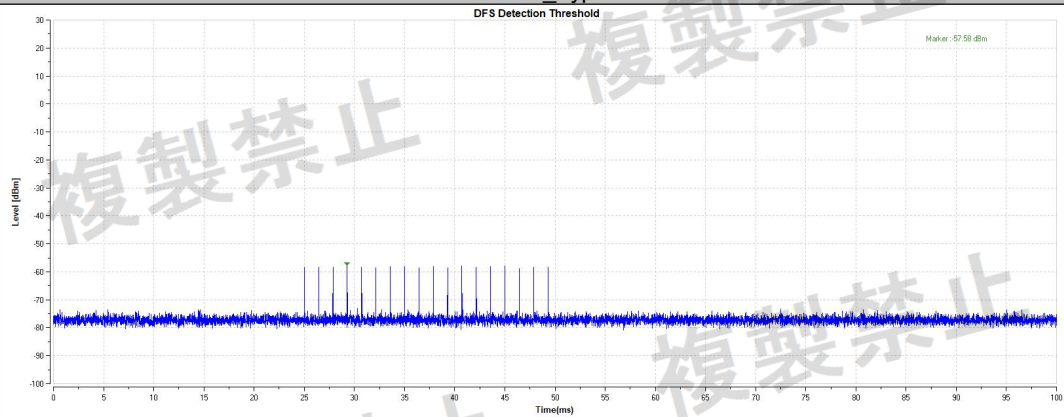


11A-5260-W53_Type6-PASS

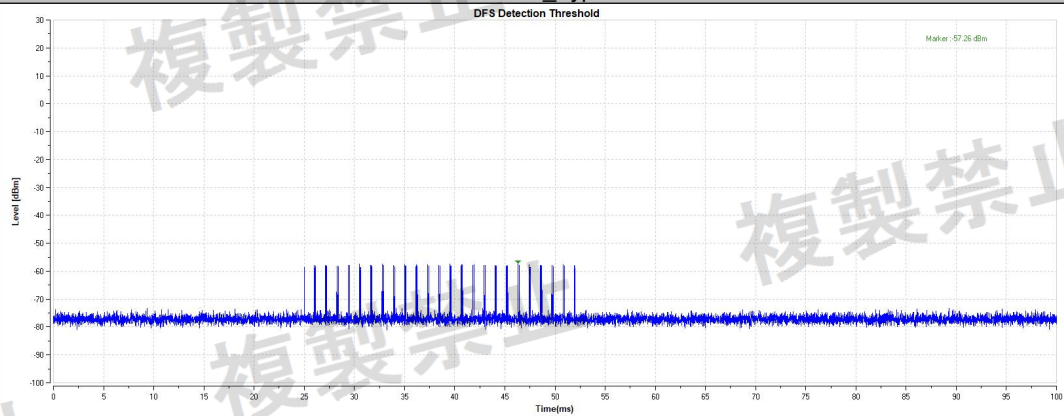


11A-5260-W53_Type7-PASS

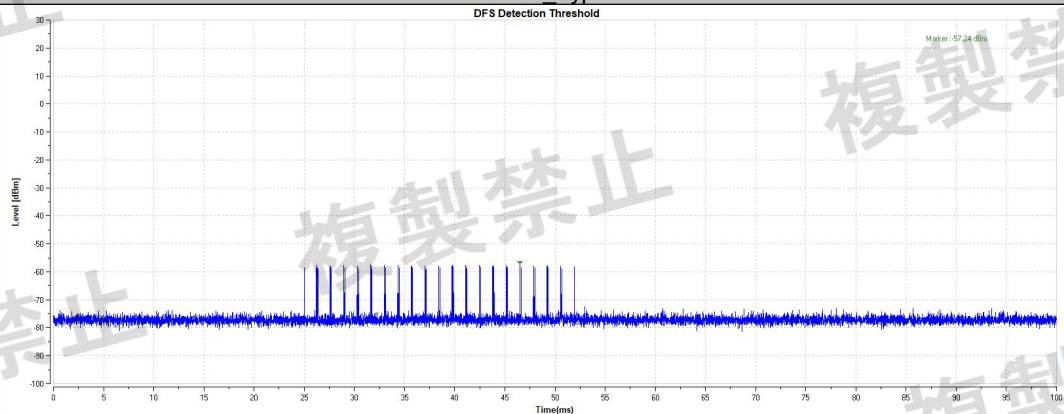


11A-5260-W53_Type8-PASS

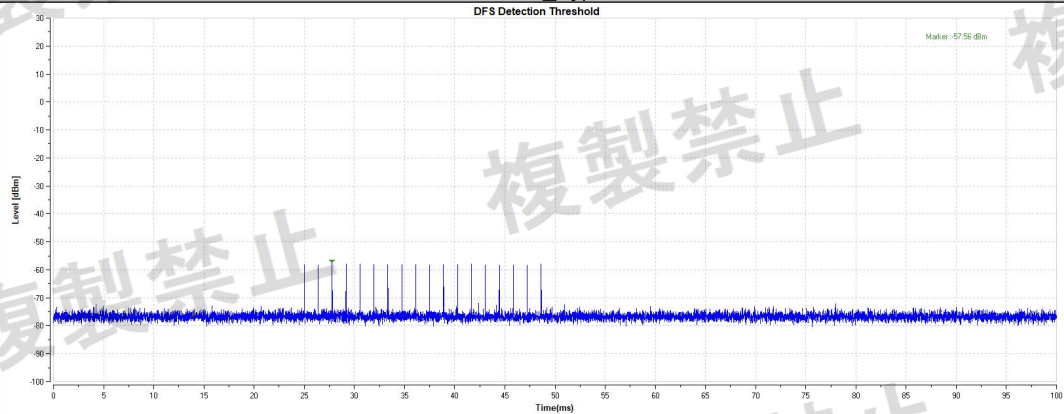


11A-5500-W56_Type1-PASS

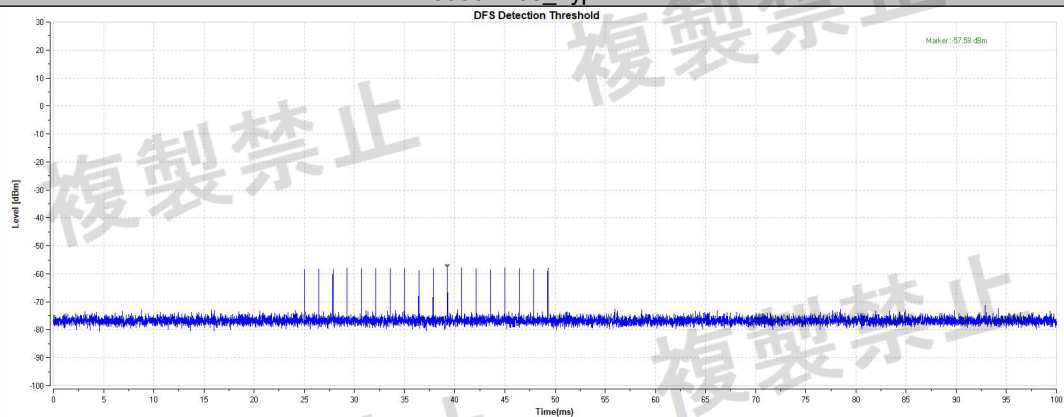


11A-5500-W56_Type2-PASS

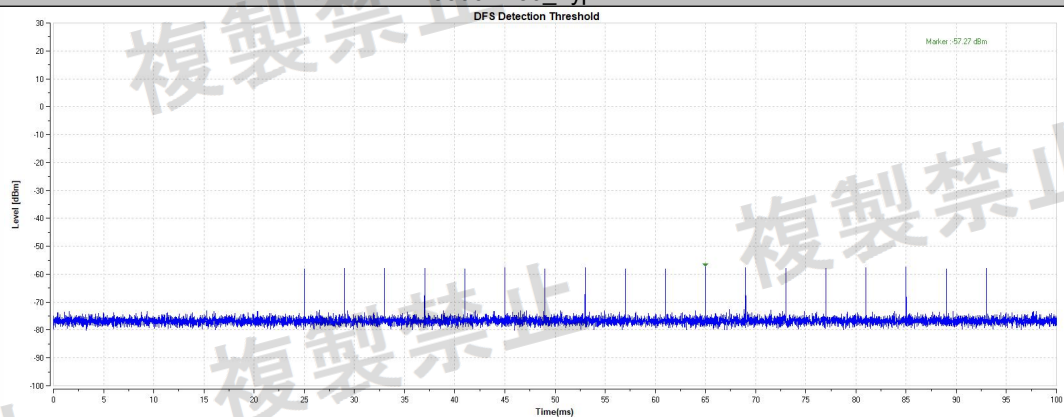


11A-5500-W56_Type3-PASS

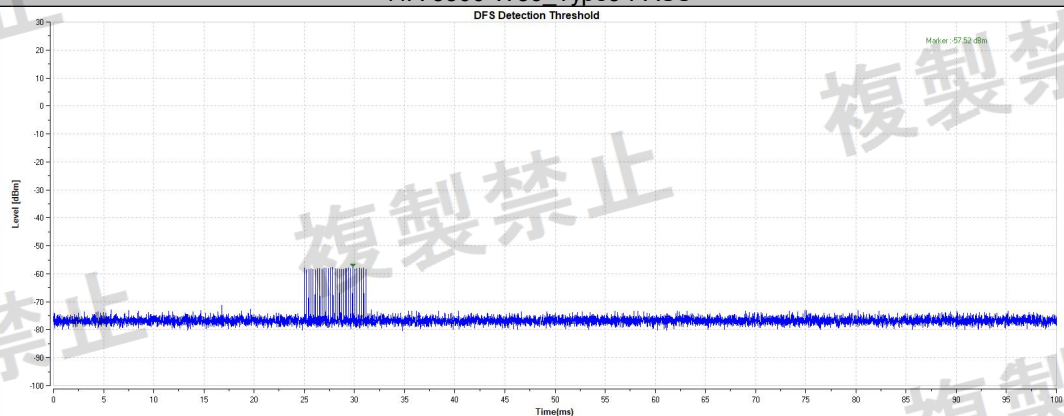


11A-5500-W56_Type4-PASS

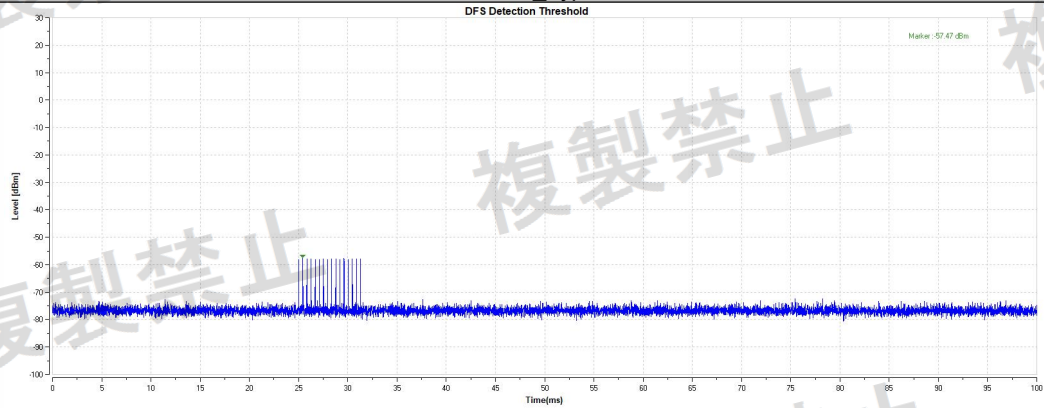


11A-5500-W56_Type5-PASS

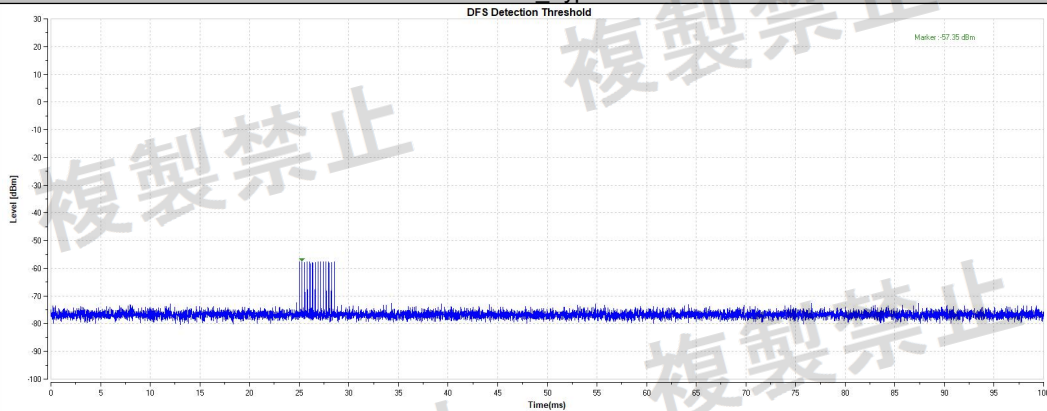

11A-5500-W56_Type6-PASS

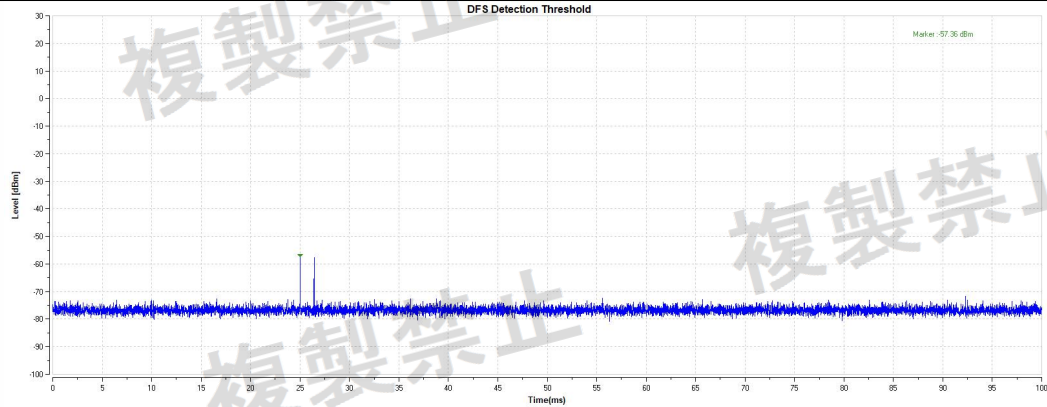

11A-5500-W56_CR-PASS

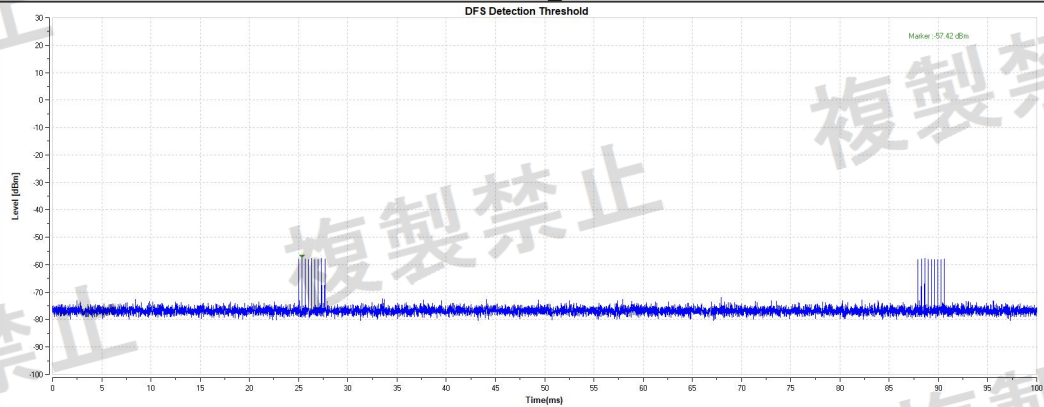

11A-5500-W56_FH-PASS

9.5. Radar Detection Probability

TestMode	Frequency[MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11A	5260	W53_Type1	18	2	90	60	PASS
11A	5260	W53_Type2	17	3	85	60	PASS
11A	5260	W53_Type3	17	3	85	60	PASS
11A	5260	W53_Type4	15	5	75	60	PASS
11A	5260	W53_Type5	16	4	80	60	PASS
11A	5260	W53_Type6	15	5	75	60	PASS
11A	5260	W53_Type7	14	6	70	60	PASS
11A	5260	W53_Type8	15	5	75	60	PASS
11A	5500	W56_Type1	17	3	85	60	PASS
11A	5500	W56_Type2	16	4	80	60	PASS
11A	5500	W56_Type3	16	4	80	60	PASS
11A	5500	W56_Type4	15	5	75	60	PASS
11A	5500	W56_Type5	14	6	70	60	PASS
11A	5500	W56_Type6	15	5	75	60	PASS
11A	5500	W56_CR	14	6	70	60	PASS
11A	5500	W56_FH	14	6	70	60	PASS

TestMode	Frequency[MHz]	Radar Type	Trial ID	Detection (1: Yes; 0: No)
11A	5260	W53_Type1	0	1
11A	5260	W53_Type1	1	1
11A	5260	W53_Type1	2	1
11A	5260	W53_Type1	3	1
11A	5260	W53_Type1	4	1
11A	5260	W53_Type1	5	1
11A	5260	W53_Type1	6	1
11A	5260	W53_Type1	7	1
11A	5260	W53_Type1	8	1
11A	5260	W53_Type1	9	1
11A	5260	W53_Type1	10	1
11A	5260	W53_Type1	11	1
11A	5260	W53_Type1	12	1
11A	5260	W53_Type1	13	0
11A	5260	W53_Type1	14	1
11A	5260	W53_Type1	15	1
11A	5260	W53_Type1	16	1
11A	5260	W53_Type1	17	0
11A	5260	W53_Type1	18	1
11A	5260	W53_Type1	19	1
11A	5260	W53_Type2	0	1
11A	5260	W53_Type2	1	1
11A	5260	W53_Type2	2	1
11A	5260	W53_Type2	3	1
11A	5260	W53_Type2	4	1
11A	5260	W53_Type2	5	1
11A	5260	W53_Type2	6	1
11A	5260	W53_Type2	7	1
11A	5260	W53_Type2	8	0
11A	5260	W53_Type2	9	1
11A	5260	W53_Type2	10	1
11A	5260	W53_Type2	11	1
11A	5260	W53_Type2	12	1
11A	5260	W53_Type2	13	1
11A	5260	W53_Type2	14	1
11A	5260	W53_Type2	15	1
11A	5260	W53_Type2	16	0
11A	5260	W53_Type2	17	1
11A	5260	W53_Type2	18	1
11A	5260	W53_Type2	19	0
11A	5260	W53_Type3	0	0
11A	5260	W53_Type3	1	1


11A	5260	W53_Type3	2	1
11A	5260	W53_Type3	3	1
11A	5260	W53_Type3	4	1
11A	5260	W53_Type3	5	1
11A	5260	W53_Type3	6	0
11A	5260	W53_Type3	7	1
11A	5260	W53_Type3	8	1
11A	5260	W53_Type3	9	0
11A	5260	W53_Type3	10	1
11A	5260	W53_Type3	11	1
11A	5260	W53_Type3	12	1
11A	5260	W53_Type3	13	1
11A	5260	W53_Type3	14	1
11A	5260	W53_Type3	15	1
11A	5260	W53_Type3	16	1
11A	5260	W53_Type3	17	1
11A	5260	W53_Type3	18	1
11A	5260	W53_Type3	19	1
11A	5260	W53_Type4	0	0
11A	5260	W53_Type4	1	1
11A	5260	W53_Type4	2	0
11A	5260	W53_Type4	3	1
11A	5260	W53_Type4	4	1
11A	5260	W53_Type4	5	0
11A	5260	W53_Type4	6	1
11A	5260	W53_Type4	7	1
11A	5260	W53_Type4	8	1
11A	5260	W53_Type4	9	1
11A	5260	W53_Type4	10	1
11A	5260	W53_Type4	11	1
11A	5260	W53_Type4	12	1
11A	5260	W53_Type4	13	1
11A	5260	W53_Type4	14	1
11A	5260	W53_Type4	15	1
11A	5260	W53_Type4	16	1
11A	5260	W53_Type4	17	0
11A	5260	W53_Type4	18	1
11A	5260	W53_Type4	19	0
11A	5260	W53_Type5	0	0
11A	5260	W53_Type5	1	0
11A	5260	W53_Type5	2	0
11A	5260	W53_Type5	3	1
11A	5260	W53_Type5	4	1
11A	5260	W53_Type5	5	1
11A	5260	W53_Type5	6	1
11A	5260	W53_Type5	7	1
11A	5260	W53_Type5	8	1
11A	5260	W53_Type5	9	1
11A	5260	W53_Type5	10	0
11A	5260	W53_Type5	11	1
11A	5260	W53_Type5	12	1
11A	5260	W53_Type5	13	1
11A	5260	W53_Type5	14	1
11A	5260	W53_Type5	15	1
11A	5260	W53_Type5	16	1
11A	5260	W53_Type5	17	1
11A	5260	W53_Type5	18	1
11A	5260	W53_Type5	19	1
11A	5260	W53_Type6	0	1
11A	5260	W53_Type6	1	1
11A	5260	W53_Type6	2	1
11A	5260	W53_Type6	3	1
11A	5260	W53_Type6	4	1
11A	5260	W53_Type6	5	1
11A	5260	W53_Type6	6	0
11A	5260	W53_Type6	7	1
11A	5260	W53_Type6	8	1
11A	5260	W53_Type6	9	1
11A	5260	W53_Type6	10	1
11A	5260	W53_Type6	11	0

11A	5260	W53_Type6	12	1
11A	5260	W53_Type6	13	0
11A	5260	W53_Type6	14	1
11A	5260	W53_Type6	15	1
11A	5260	W53_Type6	16	0
11A	5260	W53_Type6	17	1
11A	5260	W53_Type6	18	1
11A	5260	W53_Type6	19	0
11A	5260	W53_Type7	0	1
11A	5260	W53_Type7	1	1
11A	5260	W53_Type7	2	1
11A	5260	W53_Type7	3	1
11A	5260	W53_Type7	4	1
11A	5260	W53_Type7	5	0
11A	5260	W53_Type7	6	0
11A	5260	W53_Type7	7	1
11A	5260	W53_Type7	8	1
11A	5260	W53_Type7	9	1
11A	5260	W53_Type7	10	0
11A	5260	W53_Type7	11	1
11A	5260	W53_Type7	12	1
11A	5260	W53_Type7	13	1
11A	5260	W53_Type7	14	1
11A	5260	W53_Type7	15	0
11A	5260	W53_Type7	16	1
11A	5260	W53_Type7	17	1
11A	5260	W53_Type7	18	0
11A	5260	W53_Type7	19	0
11A	5260	W53_Type8	0	1
11A	5260	W53_Type8	1	1
11A	5260	W53_Type8	2	1
11A	5260	W53_Type8	3	1
11A	5260	W53_Type8	4	1
11A	5260	W53_Type8	5	1
11A	5260	W53_Type8	6	1
11A	5260	W53_Type8	7	1
11A	5260	W53_Type8	8	1
11A	5260	W53_Type8	9	1
11A	5260	W53_Type8	10	1
11A	5260	W53_Type8	11	1
11A	5260	W53_Type8	12	1
11A	5260	W53_Type8	13	0
11A	5260	W53_Type8	14	1
11A	5260	W53_Type8	15	0
11A	5260	W53_Type8	16	1
11A	5260	W53_Type8	17	0
11A	5260	W53_Type8	18	0
11A	5260	W53_Type8	19	0
11A	5500	W56_Type1	0	1
11A	5500	W56_Type1	1	1
11A	5500	W56_Type1	2	1
11A	5500	W56_Type1	3	1
11A	5500	W56_Type1	4	0
11A	5500	W56_Type1	5	1
11A	5500	W56_Type1	6	1
11A	5500	W56_Type1	7	1
11A	5500	W56_Type1	8	1
11A	5500	W56_Type1	9	1
11A	5500	W56_Type1	10	1
11A	5500	W56_Type1	11	1
11A	5500	W56_Type1	12	0
11A	5500	W56_Type1	13	1
11A	5500	W56_Type1	14	1
11A	5500	W56_Type1	15	1
11A	5500	W56_Type1	16	0
11A	5500	W56_Type1	17	1
11A	5500	W56_Type1	18	1
11A	5500	W56_Type1	19	1
11A	5500	W56_Type2	0	1
11A	5500	W56_Type2	1	1

11A	5500	W56_Type2	2	1
11A	5500	W56_Type2	3	1
11A	5500	W56_Type2	4	0
11A	5500	W56_Type2	5	1
11A	5500	W56_Type2	6	1
11A	5500	W56_Type2	7	1
11A	5500	W56_Type2	8	1
11A	5500	W56_Type2	9	1
11A	5500	W56_Type2	10	1
11A	5500	W56_Type2	11	0
11A	5500	W56_Type2	12	0
11A	5500	W56_Type2	13	1
11A	5500	W56_Type2	14	0
11A	5500	W56_Type2	15	1
11A	5500	W56_Type2	16	1
11A	5500	W56_Type2	17	1
11A	5500	W56_Type2	18	1
11A	5500	W56_Type2	19	1
11A	5500	W56_Type3	0	1
11A	5500	W56_Type3	1	1
11A	5500	W56_Type3	2	0
11A	5500	W56_Type3	3	1
11A	5500	W56_Type3	4	0
11A	5500	W56_Type3	5	0
11A	5500	W56_Type3	6	1
11A	5500	W56_Type3	7	1
11A	5500	W56_Type3	8	1
11A	5500	W56_Type3	9	1
11A	5500	W56_Type3	10	1
11A	5500	W56_Type3	11	1
11A	5500	W56_Type3	12	1
11A	5500	W56_Type3	13	1
11A	5500	W56_Type3	14	1
11A	5500	W56_Type3	15	1
11A	5500	W56_Type3	16	0
11A	5500	W56_Type3	17	1
11A	5500	W56_Type3	18	1
11A	5500	W56_Type3	19	1
11A	5500	W56_Type4	0	1
11A	5500	W56_Type4	1	1
11A	5500	W56_Type4	2	1
11A	5500	W56_Type4	3	1
11A	5500	W56_Type4	4	1
11A	5500	W56_Type4	5	0
11A	5500	W56_Type4	6	1
11A	5500	W56_Type4	7	1
11A	5500	W56_Type4	8	1
11A	5500	W56_Type4	9	1
11A	5500	W56_Type4	10	1
11A	5500	W56_Type4	11	0
11A	5500	W56_Type4	12	1
11A	5500	W56_Type4	13	1
11A	5500	W56_Type4	14	0
11A	5500	W56_Type4	15	0
11A	5500	W56_Type4	16	1
11A	5500	W56_Type4	17	0
11A	5500	W56_Type4	18	1
11A	5500	W56_Type4	19	1
11A	5500	W56_Type5	0	1
11A	5500	W56_Type5	1	1
11A	5500	W56_Type5	2	1
11A	5500	W56_Type5	3	1
11A	5500	W56_Type5	4	1
11A	5500	W56_Type5	5	0
11A	5500	W56_Type5	6	1
11A	5500	W56_Type5	7	1
11A	5500	W56_Type5	8	1
11A	5500	W56_Type5	9	1
11A	5500	W56_Type5	10	0
11A	5500	W56_Type5	11	1

11A	5500	W56_Type5	12	1
11A	5500	W56_Type5	13	0
11A	5500	W56_Type5	14	1
11A	5500	W56_Type5	15	1
11A	5500	W56_Type5	16	0
11A	5500	W56_Type5	17	1
11A	5500	W56_Type5	18	0
11A	5500	W56_Type5	19	0
11A	5500	W56_Type6	0	0
11A	5500	W56_Type6	1	1
11A	5500	W56_Type6	2	0
11A	5500	W56_Type6	3	1
11A	5500	W56_Type6	4	1
11A	5500	W56_Type6	5	1
11A	5500	W56_Type6	6	1
11A	5500	W56_Type6	7	1
11A	5500	W56_Type6	8	1
11A	5500	W56_Type6	9	1
11A	5500	W56_Type6	10	1
11A	5500	W56_Type6	11	1
11A	5500	W56_Type6	12	0
11A	5500	W56_Type6	13	0
11A	5500	W56_Type6	14	1
11A	5500	W56_Type6	15	1
11A	5500	W56_Type6	16	0
11A	5500	W56_Type6	17	1
11A	5500	W56_Type6	18	1
11A	5500	W56_Type6	19	1
11A	5500	W56_CR	0	1
11A	5500	W56_CR	1	1
11A	5500	W56_CR	2	1
11A	5500	W56_CR	3	0
11A	5500	W56_CR	4	1
11A	5500	W56_CR	5	1
11A	5500	W56_CR	6	1
11A	5500	W56_CR	7	1
11A	5500	W56_CR	8	0
11A	5500	W56_CR	9	1
11A	5500	W56_CR	10	0
11A	5500	W56_CR	11	0
11A	5500	W56_CR	12	1
11A	5500	W56_CR	13	1
11A	5500	W56_CR	14	1
11A	5500	W56_CR	15	0
11A	5500	W56_CR	16	1
11A	5500	W56_CR	17	0
11A	5500	W56_CR	18	1
11A	5500	W56_CR	19	1
11A	5500	W56_FH	0	1
11A	5500	W56_FH	1	1
11A	5500	W56_FH	2	1
11A	5500	W56_FH	3	1
11A	5500	W56_FH	4	1
11A	5500	W56_FH	5	1
11A	5500	W56_FH	6	1
11A	5500	W56_FH	7	0
11A	5500	W56_FH	8	0
11A	5500	W56_FH	9	1
11A	5500	W56_FH	10	1
11A	5500	W56_FH	11	1
11A	5500	W56_FH	12	0
11A	5500	W56_FH	13	0
11A	5500	W56_FH	14	1
11A	5500	W56_FH	15	1
11A	5500	W56_FH	16	1
11A	5500	W56_FH	17	1
11A	5500	W56_FH	18	0
11A	5500	W56_FH	19	0

10. APPENDIX 1-PHOTOGRAPHS OF TEST SETUP

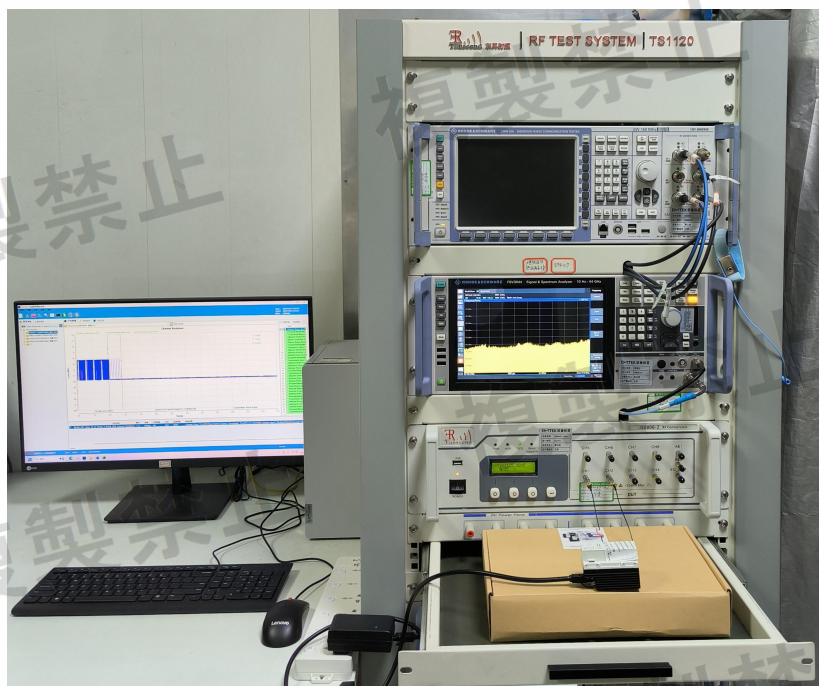

--- End of Report ---

声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。
6. Objections shall be raised within 20 days from the date receiving the report.