






NTNV-11AX40MIMO-Ant1-5670-PASS

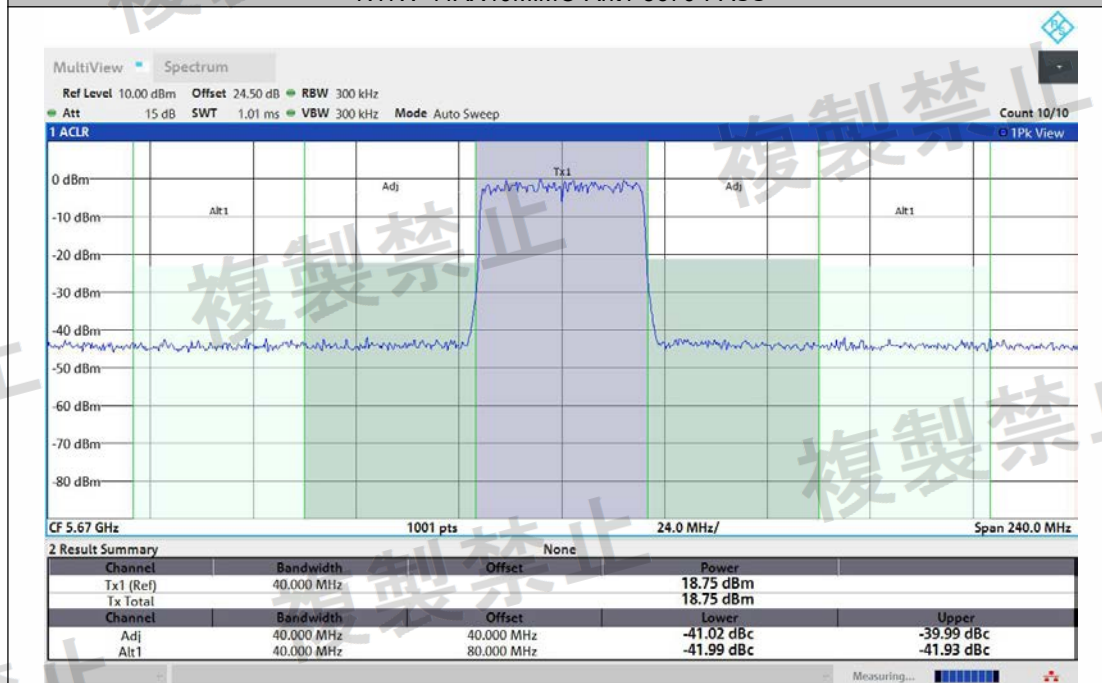


NTNV-11AX40MIMO-Ant2-5670-PASS

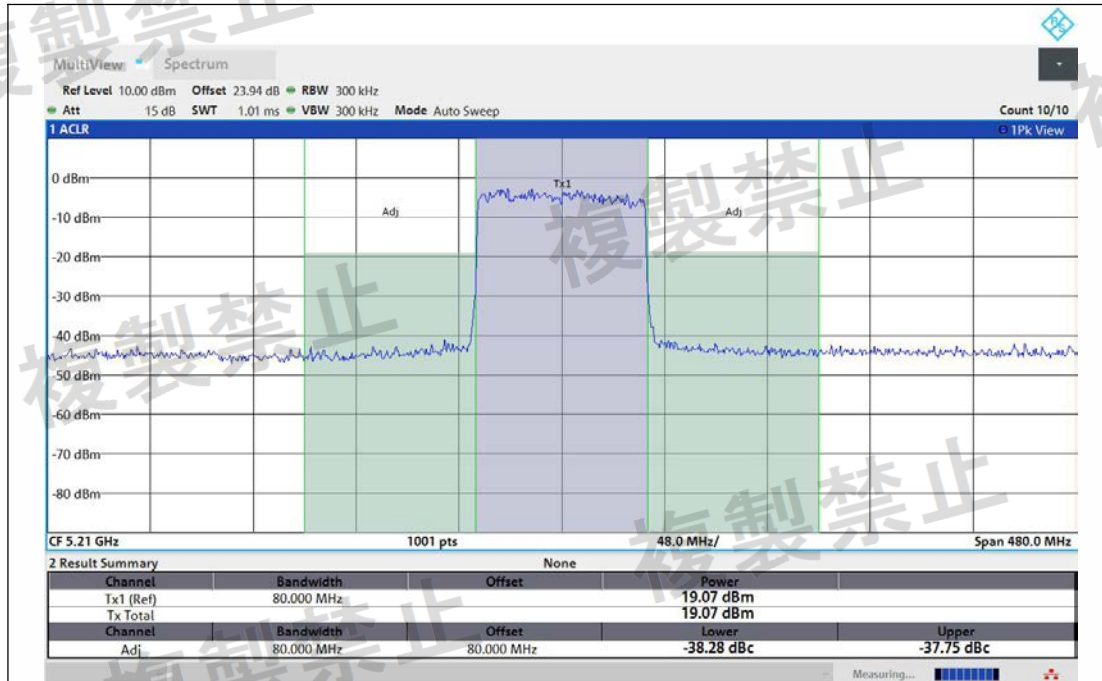


NTNV-11AX80MIMO-Ant1-5210-PASS

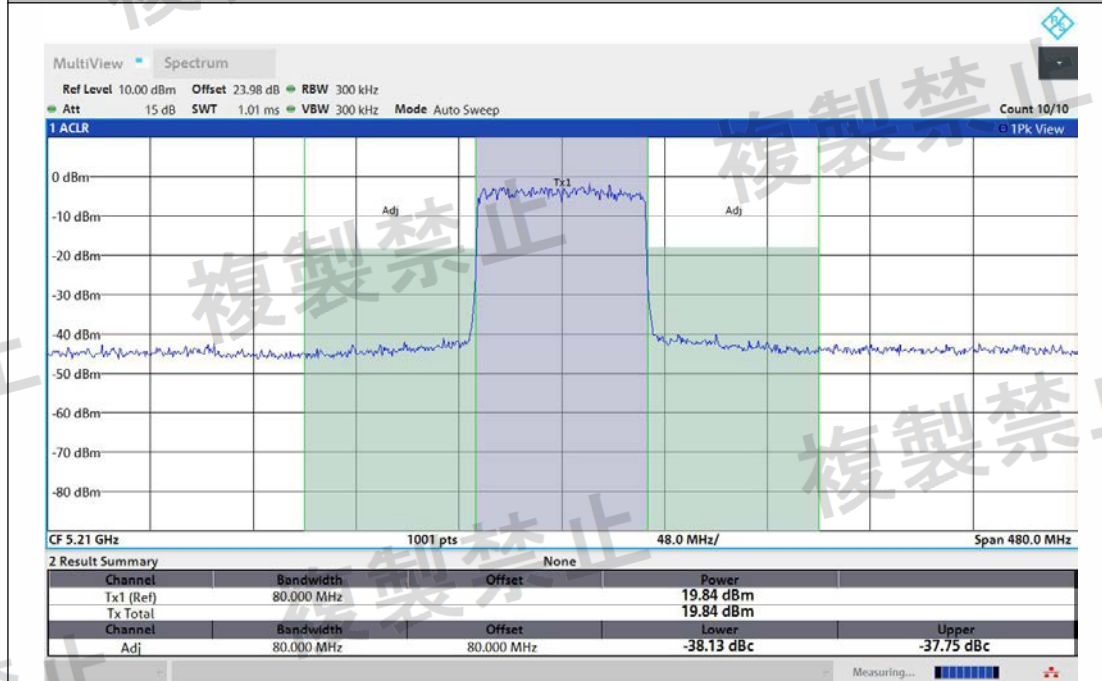


NTNV-11AX80MIMO-Ant2-5210-PASS

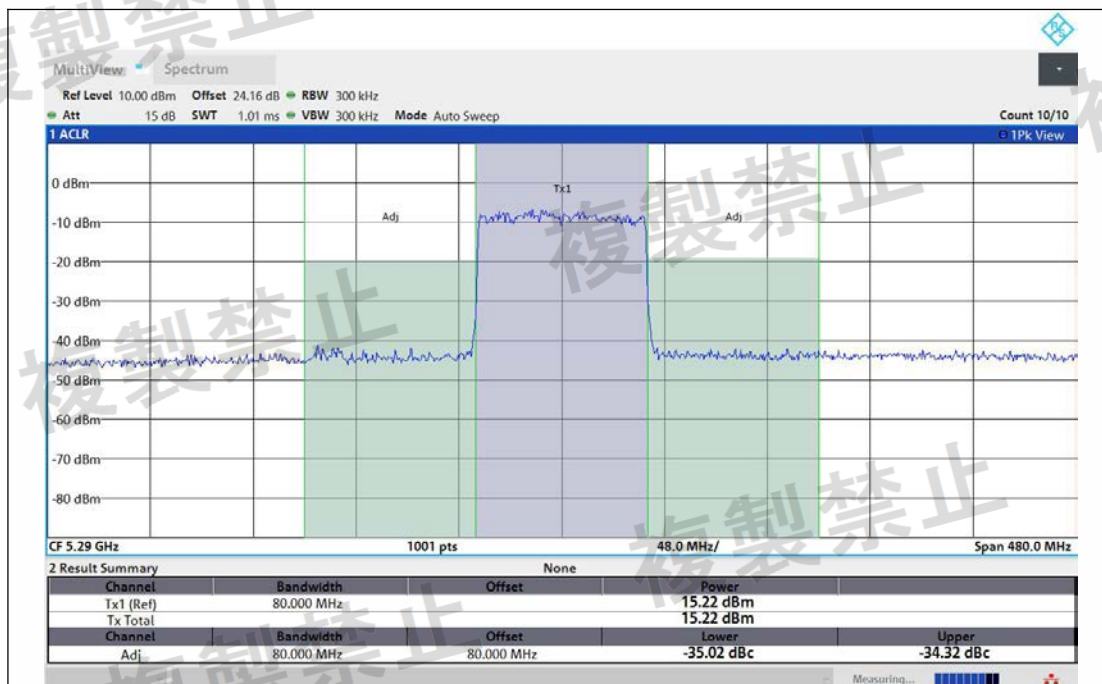


NTNV-11AX80MIMO-Ant1-5290-PASS

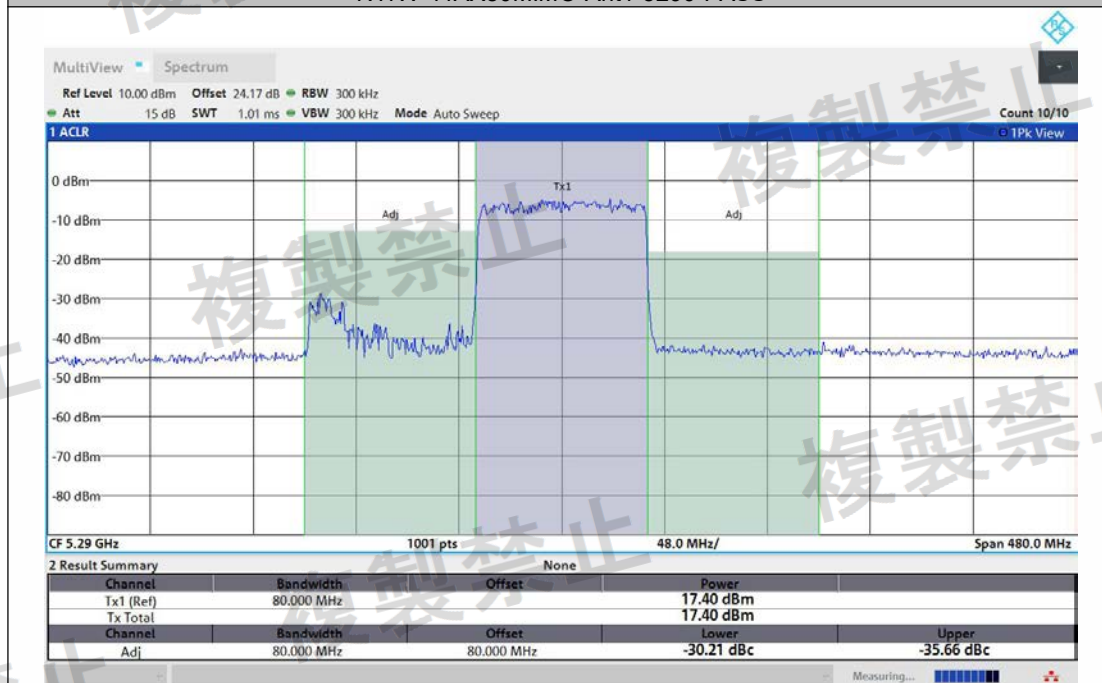

NTNV-11AX80MIMO-Ant2-5290-PASS

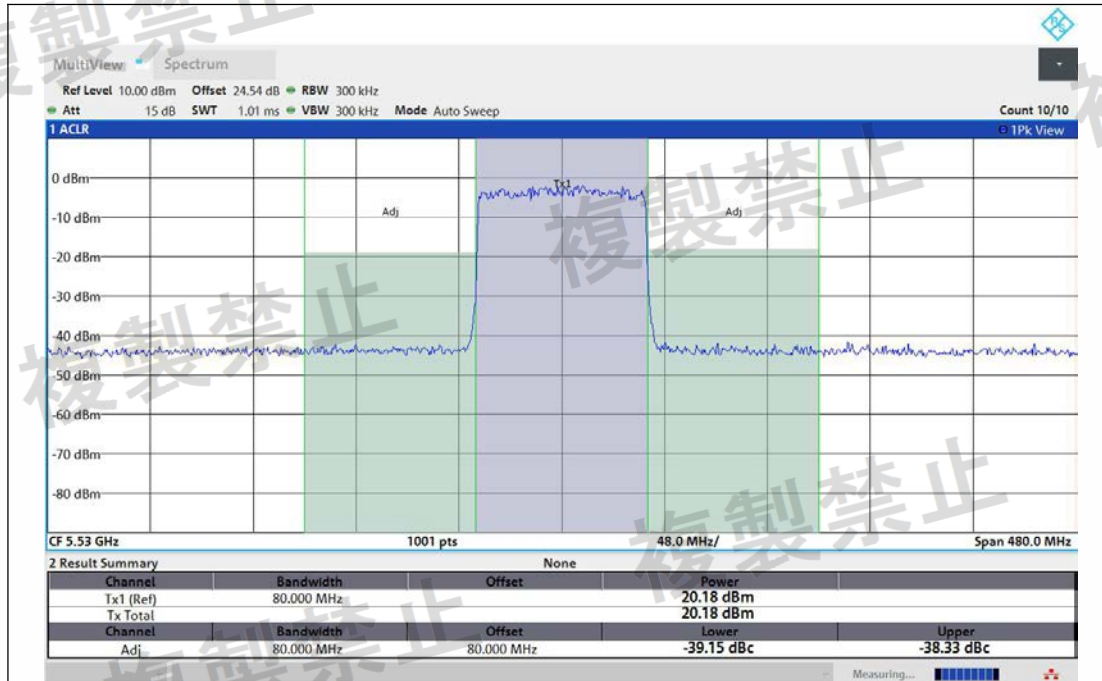

NTNV-11AX80MIMO-Ant1-5530-PASS

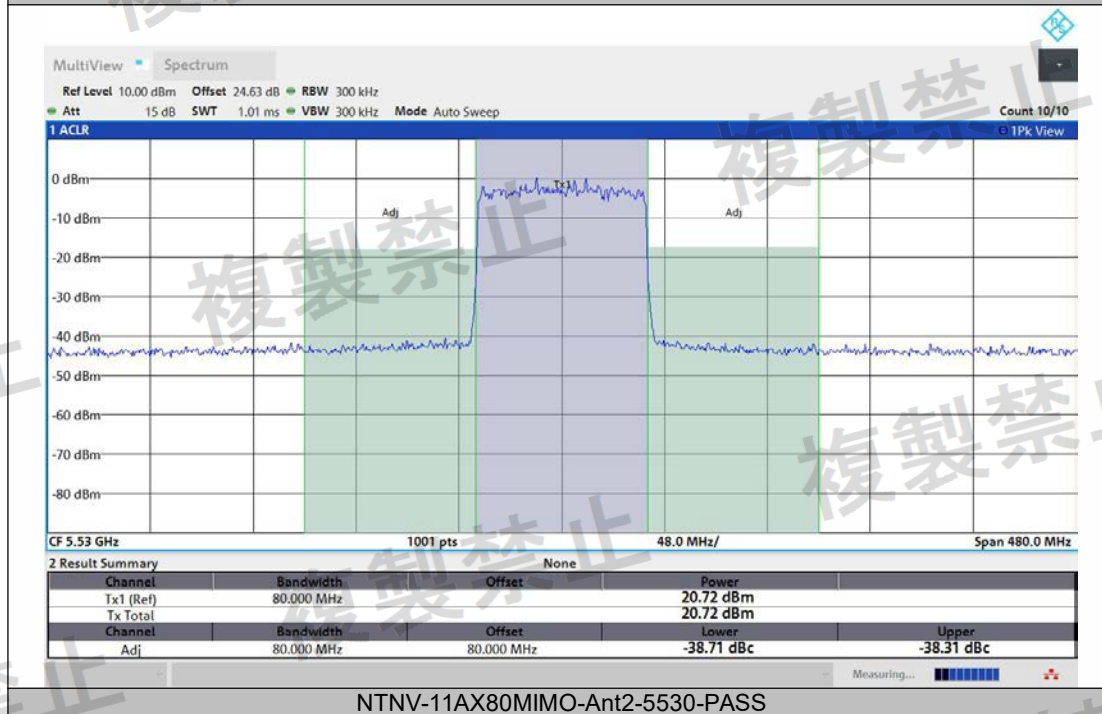

NTNV-11AX80MIMO-Ant2-5530-PASS

7.6. LEAK POWER OUT OF BAND

7.6.1. LIMIT

W52 Band
below 18MHz bandwidth

Frequency band	Deviation frequency 5240MHz	Limit
5140 - 5142MHz	98- 100MHz	2.5μW/MHz or less
5142 - 5150MHz	90 - 98MHz	15μW/MHz or less
5250 - 5251MHz	10 - 11MHz	$10^{1-(f-9)}$ mW/MHz or less
5251 - 5260MHz	11 - 20MHz	$10^{-1-(8/90)(f-20)}$ mW/MHz or less
5260 - 5266.7MHz	20 - 26.7MHz	$10^{-1.8-(6/50)(f-20)}$ mW/MHz or less
5266.7 - 5360MHz	26.7 - 120MHz	2.5μW/MHz or less

between 18MHz to 19MHz bandwidth

Frequency band	Deviation frequency 5240MHz	Limit
5135 - 5142MHz	98- 105MHz	2.5μW/MHz or less
5142 - 5150MHz	90 - 98MHz	15μW/MHz or less
5250 - 5251MHz	10 - 11MHz	$10^{1-(f-9)}$ mW/MHz or less
5251 - 5260MHz	11 - 20MHz	$10^{-1-(8/90)(f-20)}$ mW/MHz or less
5260 - 5266.7MHz	20 - 26.7MHz	$10^{-1.8-(6/50)(f-20)}$ mW/MHz or less
5266.7 - 5365MHz	26.7 - 125MHz	2.5μW/MHz or less

approximately 40MHz bandwidth

Frequency band	Deviation frequency 5230MHz	Limit
5100 - 5141.6MHz	88.4- 130MHz	2.5μW/MHz or less
5141.6 - 5150MHz	80 - 88.4MHz	15μW/MHz or less
5250 - 5251MHz	20 - 21MHz	$10^{-(f-20)+\log(1/2)}$ mW/MHz or less
5251 - 5270MHz	21 - 40MHz	$10^{-(8/190)(f-21)-1+\log(1/2)}$ mW/MHz or less
5270 - 5278.4MHz	40 - 48.4MHz	$10^{-(3/50)(f-40)-1.8+\log(1/2)}$ mW/MHz or less
5278.4 - 5400MHz	48.4 - 170MHz	2.5μW/MHz or less

approximately 80MHz bandwidth

Frequency band	Deviation frequency 5210MHz	Limit
5020 - 5123.2MHz	86.8- 190MHz	2.5μW/MHz or less
5123.2 - 5150MHz	60 - 86.8MHz	15μW/MHz or less
5250 - 5251MHz	40 - 41MHz	$10^{-(f-40)+\log(1/4)}$ mW/MHz or less
5251 - 5290MHz	41 - 80MHz	$10^{-(8/390)(f-41)-1+\log(1/4)}$ mW/MHz or less
5290 - 5296.7MHz	80 - 86.7MHz	$10^{-(3/100)(f-80)-1.8+\log(1/4)}$ mW/MHz or less
5296.7 - 5480MHz	86.7 - 270MHz	2.5μW/MHz or less

W53 Band
below 18MHz bandwidth

Frequency band	Deviation frequency 5260MHz	Limit
5140 - 5233.3MHz	26.7 - 120MHz	2.5μW/MHz or less
5233.3 - 5240MHz	20 - 26.7MHz	$10^{-1.8-(6/50)(f-20)}$ mW/MHz or less
5240 - 5249MHz	11 - 20MHz	$10^{-1-(8/90)(f-11)}$ mW/MHz or less
5249 - 5250MHz	10 - 11MHz	$10^{1-(f-9)}$ mW/MHz or less
5350 - 5360MHz	90 - 100MHz	2.5μW/MHz or less

between 18MHz to 19MHz bandwidth

Frequency band	Deviation frequency 5260MHz	Limit
5135 - 5233.3MHz	26.7 - 125MHz	2.5μW/MHz or less
5233.3 - 5240MHz	20 - 26.7MHz	$10^{-1.8-(6/50)(f-20)}$ mW/MHz or less
5240 - 5249MHz	11 - 20MHz	$10^{-1-(8/90)(f-11)}$ mW/MHz or less
5249 - 5250MHz	10 - 11MHz	$10^{1-(f-9)}$ mW/MHz or less
5350 - 5365MHz	90 - 105MHz	2.5μW/MHz or less

approximately 40MHz bandwidth

Frequency band	Deviation frequency 5270MHz	Limit
5100 - 5210MHz	60 - 160MHz	2.5μW/MHz or less
5210 - 5221.6MHz	48.4 - 60MHz	2.5μW/MHz or less
5221.6 - 5230MHz	40 - 48.4MHz	$10^{-(3/50)(f-40)-1.8+\log(1/2)}$ mW/MHz or less
5230 - 5249MHz	21 - 40MHz	$10^{-(8/190)(f-21)-1+\log(1/2)}$ mW/MHz or less
5249 - 5250MHz	20 - 21MHz	$10^{-(f-20)+\log(1/2)}$ mW/MHz or less
5350 - 5358.4MHz	80 - 88.4MHz	15μW/MHz or less
5358.4 - 5400MHz	88.4 - 100MHz	2.5μW/MHz or less

approximately 80MHz bandwidth

Frequency band	Deviation frequency 5290MHz	Limit
5020 - 5203.3MHz	86.7 - 270MHz	2.5μW/MHz or less
5203.3 - 5210MHz	80 - 86.7MHz	$10^{-(3/100)(f-80)-1.8+\log(1/4)}$ W/MHz or less
5210 - 5249MHz	41 - 80MHz	$10^{-(8/390)(f-41)-1+\log(1/4)}$ mW/MHz or less
5249 - 5250MHz	40 - 41MHz	$10^{-(f-40)+\log(1/4)}$ mW/MHz or less
5350 - 5376.8MHz	60 - 86.8MHz	15μW/MHz or less
5376.8 - 5480MHz	86.8 - 190MHz	2.5μW/MHz or less

W56 Band

approximately 20MHz bandwidth

Frequency band	Limit
5,455-5,460MHz	2.5μW/MHz or less
5,460-5,470MHz	12.5μW/MHz or less
5,725-5,740MHz	12.5μW/MHz or less
5,740-5,745MHz	2.5μW/MHz or less

approximately 40MHz bandwidth

Frequency band	Limit
5,420MHz-5,460MHz	12.5μW/MHz or less
5,460MHz-5,470MHz	50.0μW/MHz or less
5,725MHz-5,760MHz	12.5μW/MHz or less

approximately 80MHz bandwidth


Frequency band	Limit
5,340MHz-5,460MHz	12.5μW/MHz or less
5,460MHz-5,469.5MHz	50.0μW/MHz or less
5,469.5MHz-5,470MHz	51.2μW/MHz or less
5,725MHz-5,800MHz	12.5μW/MHz or less

7.6.2. Test Procedure

Test Method for Radio Equipment mentioned in MIC Notice No.88 Annex45 Clause 7

Test Configuration

Temperature and Voltage Measurement (under normal and extreme test conditions)



Remarks:

The spectrum analyzer could be connected to a monopole antenna or directly connected to the EUT, if the EUT has already employing an antenna connector.

7.6.3. TEST RESULT

W52 Band

Temperature :	24.5℃	Test By:	LHJ
Humidity :	45%	Test voltage:	Normal voltage

Band	Mode	Frequency (MHz)	Test Result
W52	802.11a	5180	PASS
		5240	PASS
	802.11n (HT20)	5180	PASS
		5240	PASS
	802.11ac (HT20)	5180	PASS
		5240	PASS
	802.11ax (HT20)	5180	PASS
		5240	PASS

Band	Mode	Frequency (MHz)	Test Result
W52	802.11n (HT40)	5190	PASS
		5230	PASS
	802.11ac (HT40)	5190	PASS
		5230	PASS
	802.11ax (HT40)	5190	PASS
		5230	PASS

Band	Mode	Frequency (MHz)	Channel Power (dBm)
W52	802.11ac (VHT80)	5210	PASS
	802.11ax (VHT80)	5210	PASS

W53 Band

Temperature :	24.5℃	Test By:	LHJ
Humidity :	45%	Test voltage:	Normal voltage

Band	Mode	Frequency (MHz)	Test Result
W53	802.11a	5260	PASS
		5320	PASS
	802.11n (HT20)	5260	PASS
		5320	PASS
	802.11ac (HT20)	5260	PASS
		5320	PASS
	802.11ax (HT20)	5260	PASS
		5320	PASS

Band	Mode	Frequency (MHz)	Test Result
W53	802.11n (HT40)	5270	PASS
		5310	PASS
	802.11ac (HT40)	5270	PASS
		5310	PASS
	802.11ax (HT40)	5270	PASS
		5310	PASS

Band	Mode	Frequency (MHz)	Test Result
W53	802.11ac (VHT80)	5290	PASS
	802.11ax (VHT80)	5290	PASS

Band	Mode	Frequency (MHz)	Test Result
W53	802.11ac (VHT160)	5250	PASS
	802.11ax (VHT160)	5250	PASS

W56 Band

Temperature :	24.5℃	Test By:	LHJ
Humidity :	45%	Test voltage:	Normal voltage

Band	Mode	Frequency (MHz)	Test Result
W56	802.11a	5500	PASS
		5700	PASS
	802.11n (HT20)	5500	PASS
		5700	PASS
	802.11ac (HT20)	5500	PASS
		5700	PASS
	802.11ax (HT20)	5500	PASS
		5700	PASS

Band	Mode	Frequency (MHz)	Test Result
W56	802.11n (HT40)	5510	PASS
		5670	PASS
	802.11ac (HT40)	5510	PASS
		5670	PASS
	802.11ax (HT40)	5510	PASS
		5670	PASS

Band	Mode	Frequency (MHz)	Test Result
W56	802.11ac (VHT80)	5530	PASS
	802.11ax (VHT80)	5530	PASS

Band	Mode	Frequency (MHz)	Test Result
W56	802.11ac (VHT160)	5570	PASS
	802.11ax (VHT160)	5570	PASS

7.7. SPURIOUS EMISSIONS OF Rx

7.7.1. Limit

Frequency	Limit
Below 1GHz	$\leq 4\text{nW}$
Above 1GHz	$\leq 20\text{nW}$

7.7.2. Test Procedure

Test Method for Radio Equipment mentioned in MIC Notice No.88 Annex45 Clause 8

7.7.3. Test Configuration

Temperature and Voltage Measurement (under normal and extreme test conditions)



Remarks:


The spectrum analyzer could be connected to a monopole antenna or directly connected to the EUT, if the EUT has already employing an antenna connector.

7.7.4. TEST RESULT


TestCondition	TestMode	Antenna	Frequency[M Hz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11A	Ant1	5180	30~1000	32.61	-78.39	≤-54	0.01449	≤4	PASS
NTNV	11A	Ant2	5180	30~1000	33.09	-78.97	≤-54	0.01268	≤4	PASS
NTNV	11A	Ant1	5180	1000~26000	2569.40	-58.43	≤-47	1.43549	≤20	PASS
NTNV	11A	Ant2	5180	1000~26000	22060.60	-61.67	≤-47	0.68077	≤20	PASS
NTNV	11A	Ant1	5200	30~1000	31.52	-79.14	≤-54	0.01219	≤4	PASS
NTNV	11A	Ant2	5200	30~1000	33.09	-78.56	≤-54	0.01393	≤4	PASS
NTNV	11A	Ant1	5200	1000~26000	22076.90	-63.16	≤-47	0.48306	≤20	PASS
NTNV	11A	Ant2	5200	1000~26000	22444.40	-62.29	≤-47	0.59020	≤20	PASS
NTNV	11A	Ant1	5240	30~1000	32.36	-78.18	≤-54	0.01521	≤4	PASS
NTNV	11A	Ant2	5240	30~1000	31.27	-78.88	≤-54	0.01294	≤4	PASS
NTNV	11A	Ant1	5240	1000~26000	2585.60	-62.88	≤-47	0.51523	≤20	PASS
NTNV	11A	Ant2	5240	1000~26000	21464.40	-62.49	≤-47	0.56364	≤20	PASS
NTNV	11A	Ant1	5260	30~1000	35.76	-77.79	≤-54	0.01663	≤4	PASS
NTNV	11A	Ant2	5260	30~1000	32.12	-78.84	≤-54	0.01306	≤4	PASS
NTNV	11A	Ant1	5260	1000~26000	22246.90	-62.53	≤-47	0.55847	≤20	PASS
NTNV	11A	Ant2	5260	1000~26000	19114.40	-63.43	≤-47	0.45394	≤20	PASS
NTNV	11A	Ant1	5280	30~1000	34.43	-78.85	≤-54	0.01303	≤4	PASS
NTNV	11A	Ant2	5280	30~1000	34.91	-77.12	≤-54	0.01941	≤4	PASS
NTNV	11A	Ant1	5280	1000~26000	22203.10	-62.82	≤-47	0.52240	≤20	PASS
NTNV	11A	Ant2	5280	1000~26000	19155.60	-63.17	≤-47	0.48195	≤20	PASS
NTNV	11A	Ant1	5320	30~1000	34.91	-77.32	≤-54	0.01854	≤4	PASS
NTNV	11A	Ant2	5320	30~1000	35.76	-78.49	≤-54	0.01416	≤4	PASS
NTNV	11A	Ant1	5320	1000~26000	21973.10	-62.29	≤-47	0.59020	≤20	PASS
NTNV	11A	Ant2	5320	1000~26000	23431.90	-62.70	≤-47	0.53703	≤20	PASS
NTNV	11A	Ant1	5500	30~1000	33.33	-78.77	≤-54	0.01327	≤4	PASS
NTNV	11A	Ant2	5500	30~1000	34.18	-78.22	≤-54	0.01507	≤4	PASS
NTNV	11A	Ant1	5500	1000~26000	22188.10	-62.58	≤-47	0.55208	≤20	PASS
NTNV	11A	Ant2	5500	1000~26000	22141.90	-62.97	≤-47	0.50466	≤20	PASS
NTNV	11A	Ant1	5580	30~1000	36.00	-77.07	≤-54	0.01963	≤4	PASS
NTNV	11A	Ant2	5580	30~1000	35.03	-77.76	≤-54	0.01675	≤4	PASS
NTNV	11A	Ant1	5580	1000~26000	2599.40	-57.82	≤-47	1.65196	≤20	PASS
NTNV	11A	Ant2	5580	1000~26000	22080.60	-62.96	≤-47	0.50582	≤20	PASS
NTNV	11A	Ant1	5700	30~1000	32.85	-78.26	≤-54	0.01493	≤4	PASS
NTNV	11A	Ant2	5700	30~1000	35.52	-78.30	≤-54	0.01479	≤4	PASS
NTNV	11A	Ant1	5700	1000~26000	2598.10	-60.09	≤-47	0.97949	≤20	PASS
NTNV	11A	Ant2	5700	1000~26000	2585.60	-60.14	≤-47	0.96828	≤20	PASS
NTNV	11N20MIMO	Ant1	5180	30~1000	33.82	-79.25	≤-54	0.01189	≤4	PASS
NTNV	11N20MIMO	Ant2	5180	30~1000	34.18	-78.31	≤-54	0.01476	≤4	PASS
NTNV	11N20MIMO	Ant1	5180	1000~26000	21878.10	-62.72	≤-47	0.53456	≤20	PASS
NTNV	11N20MIMO	Ant2	5180	1000~26000	2658.10	-61.72	≤-47	0.67298	≤20	PASS
NTNV	11N20MIMO	Ant1	5200	30~1000	34.43	-78.42	≤-54	0.01439	≤4	PASS
NTNV	11N20MIMO	Ant2	5200	30~1000	31.76	-78.79	≤-54	0.01321	≤4	PASS
NTNV	11N20MIMO	Ant1	5200	1000~26000	21980.60	-62.48	≤-47	0.56494	≤20	PASS
NTNV	11N20MIMO	Ant2	5200	1000~26000	22030.60	-62.87	≤-47	0.51642	≤20	PASS
NTNV	11N20MIMO	Ant1	5240	30~1000	33.33	-79.07	≤-54	0.01239	≤4	PASS
NTNV	11N20MIMO	Ant2	5240	30~1000	31.03	-78.46	≤-54	0.01426	≤4	PASS
NTNV	11N20MIMO	Ant1	5240	1000~26000	22150.60	-62.81	≤-47	0.52360	≤20	PASS
NTNV	11N20MIMO	Ant2	5240	1000~26000	18780.60	-63.21	≤-47	0.47753	≤20	PASS
NTNV	11N20MIMO	Ant1	5260	30~1000	30.67	-78.88	≤-54	0.01294	≤4	PASS
NTNV	11N20MIMO	Ant2	5260	30~1000	35.88	-77.22	≤-54	0.01897	≤4	PASS
NTNV	11N20MIMO	Ant1	5260	1000~26000	22206.90	-63.12	≤-47	0.48753	≤20	PASS
NTNV	11N20MIMO	Ant2	5260	1000~26000	2658.10	-61.54	≤-47	0.70146	≤20	PASS
NTNV	11N20MIMO	Ant1	5280	30~1000	32.73	-78.17	≤-54	0.01524	≤4	PASS
NTNV	11N20MIMO	Ant2	5280	30~1000	35.52	-78.42	≤-54	0.01439	≤4	PASS
NTNV	11N20MIMO	Ant1	5280	1000~26000	2664.40	-62.17	≤-47	0.60674	≤20	PASS
NTNV	11N20MIMO	Ant2	5280	1000~26000	21311.90	-63.07	≤-47	0.49317	≤20	PASS
NTNV	11N20MIMO	Ant1	5320	30~1000	33.46	-77.80	≤-54	0.01660	≤4	PASS
NTNV	11N20MIMO	Ant2	5320	30~1000	35.39	-77.97	≤-54	0.01596	≤4	PASS
NTNV	11N20MIMO	Ant1	5320	1000~26000	21656.90	-62.22	≤-47	0.59979	≤20	PASS
NTNV	11N20MIMO	Ant2	5320	1000~26000	22103.10	-62.48	≤-47	0.56494	≤20	PASS
NTNV	11N20MIMO	Ant1	5500	30~1000	32.73	-78.44	≤-54	0.01432	≤4	PASS
NTNV	11N20MIMO	Ant2	5500	30~1000	33.33	-78.67	≤-54	0.01358	≤4	PASS
NTNV	11N20MIMO	Ant1	5500	1000~26000	2665.60	-59.99	≤-47	1.00231	≤20	PASS
NTNV	11N20MIMO	Ant2	5500	1000~26000	22306.90	-63.70	≤-47	0.42658	≤20	PASS
NTNV	11N20MIMO	Ant1	5580	30~1000	36.00	-77.90	≤-54	0.01622	≤4	PASS
NTNV	11N20MIMO	Ant2	5580	30~1000	31.39	-78.12	≤-54	0.01542	≤4	PASS
NTNV	11N20MIMO	Ant1	5580	1000~26000	2613.10	-57.79	≤-47	1.66341	≤20	PASS
NTNV	11N20MIMO	Ant2	5580	1000~26000	22248.10	-61.35	≤-47	0.73282	≤20	PASS
NTNV	11N20MIMO	Ant1	5700	30~1000	35.52	-78.21	≤-54	0.01510	≤4	PASS
NTNV	11N20MIMO	Ant2	5700	30~1000	35.52	-78.76	≤-54	0.01330	≤4	PASS
NTNV	11N20MIMO	Ant1	5700	1000~26000	22038.10	-62.40	≤-47	0.57544	≤20	PASS
NTNV	11N20MIMO	Ant2	5700	1000~26000	22215.60	-62.18	≤-47	0.60534	≤20	PASS
NTNV	11N40MIMO	Ant1	5190	30~1000	34.91	-78.78	≤-54	0.01324	≤4	PASS
NTNV	11N40MIMO	Ant2	5190	30~1000	34.06	-78.03	≤-54	0.01574	≤4	PASS
NTNV	11N40MIMO	Ant1	5190	1000~26000	22009.40	-62.42	≤-47	0.57280	≤20	PASS
NTNV	11N40MIMO	Ant2	5190	1000~26000	22056.90	-62.88	≤-47	0.51523	≤20	PASS
NTNV	11N40MIMO	Ant1	5230	30~1000	35.27	-79.06	≤-54	0.01242	≤4	PASS
NTNV	11N40MIMO	Ant2	5230	30~1000	30.30	-78.62	≤-54	0.01374	≤4	PASS
NTNV	11N40MIMO	Ant1	5230	1000~26000	22153.10	-62.41	≤-47	0.57412	≤20	PASS
NTNV	11N40MIMO	Ant2	5230	1000~26000	2540.60	-62.96	≤-47	0.50582	≤20	PASS
NTNV	11N40MIMO	Ant1	5270	30~1000	34.30	-78.04	≤-54	0.01570	≤4	PASS
NTNV	11N40MIMO	Ant2	5270	30~1000	33.94	-77.69	≤-54	0.01702	≤4	PASS
NTNV	11N40MIMO	Ant1	5270	1000~26000	2590.60	-61.67	≤-47	0.68077	≤20	PASS
NTNV	11N40MIMO	Ant2	5270	1000~26000	22089.40	-62.87	≤-47	0.51642	≤20	PASS
NTNV	11N40MIMO	Ant1	5310	30~1000	45.82	-78.66	≤-54	0.01361	≤4	PASS
NTNV	11N40MIMO	Ant2	5310	30~1000	33.94	-77.96	≤-54	0.01600	≤4	PASS
NTNV	11N40MIMO	Ant1	5310	1000~26000	21986.90	-63.04	≤-47	0.49659	≤20	PASS
NTNV	11N40MIMO	Ant2	5310	1000~26000	22046.90	-63.26	≤-47	0.47206	≤20	PASS
NTNV	11N40MIMO	Ant1	5510	30~1000	33.82	-77.65	≤-54	0.01718	≤4	PASS
NTNV	11N40MIMO	Ant2	5510	30~1000	34.18	-78.84	≤-54	0.01306	≤4	PASS
NTNV	11N40MIMO	Ant1	5510	1000~26000	21854.40	-63.07	≤-47	0.49317	≤20	PASS
NTNV	11N40MIMO	Ant2	5510	1000~26000	2613.10	-62.65	≤-47	0.54325	≤20	PASS
NTNV	11N40MIMO	Ant1	5670	30~1000	34.67	-78.23	≤-54	0.01503	≤4	PASS

NTNV	11N40MIMO	Ant2	5670	30~1000	72.25	-78.75	≤-54	0.01334	≤4	PASS
NTNV	11N40MIMO	Ant1	5670	1000~26000	19168.10	-62.93	≤-47	0.50933	≤20	PASS
NTNV	11N40MIMO	Ant2	5670	1000~26000	19198.10	-63.19	≤-47	0.47973	≤20	PASS
NTNV	11AC20MIMO	Ant1	5180	30~1000	31.76	-79.31	≤-54	0.01172	≤4	PASS
NTNV	11AC20MIMO	Ant2	5180	30~1000	35.88	-78.80	≤-54	0.01318	≤4	PASS
NTNV	11AC20MIMO	Ant1	5180	1000~26000	22091.90	-63.02	≤-47	0.49888	≤20	PASS
NTNV	11AC20MIMO	Ant2	5180	1000~26000	22131.90	-62.75	≤-47	0.53088	≤20	PASS
NTNV	11AC20MIMO	Ant1	5200	30~1000	33.70	-79.09	≤-54	0.01233	≤4	PASS
NTNV	11AC20MIMO	Ant2	5200	30~1000	34.91	-78.71	≤-54	0.01346	≤4	PASS
NTNV	11AC20MIMO	Ant1	5200	1000~26000	22281.90	-62.90	≤-47	0.51286	≤20	PASS
NTNV	11AC20MIMO	Ant2	5200	1000~26000	22171.90	-62.72	≤-47	0.53456	≤20	PASS
NTNV	11AC20MIMO	Ant1	5240	30~1000	32.49	-79.19	≤-54	0.01205	≤4	PASS
NTNV	11AC20MIMO	Ant2	5240	30~1000	33.33	-78.86	≤-54	0.01300	≤4	PASS
NTNV	11AC20MIMO	Ant1	5240	1000~26000	19116.90	-63.29	≤-47	0.46881	≤20	PASS
NTNV	11AC20MIMO	Ant2	5240	1000~26000	3416.90	-59.58	≤-47	1.10154	≤20	PASS
NTNV	11AC20MIMO	Ant1	5260	30~1000	33.46	-78.59	≤-54	0.01384	≤4	PASS
NTNV	11AC20MIMO	Ant2	5260	30~1000	33.33	-78.69	≤-54	0.01352	≤4	PASS
NTNV	11AC20MIMO	Ant1	5260	1000~26000	22143.10	-62.87	≤-47	0.51642	≤20	PASS
NTNV	11AC20MIMO	Ant2	5260	1000~26000	23398.10	-62.71	≤-47	0.53580	≤20	PASS
NTNV	11AC20MIMO	Ant1	5280	30~1000	35.39	-78.37	≤-54	0.01455	≤4	PASS
NTNV	11AC20MIMO	Ant2	5280	30~1000	35.52	-77.69	≤-54	0.01702	≤4	PASS
NTNV	11AC20MIMO	Ant1	5280	1000~26000	22034.40	-62.82	≤-47	0.52240	≤20	PASS
NTNV	11AC20MIMO	Ant2	5280	1000~26000	22175.60	-62.78	≤-47	0.52723	≤20	PASS
NTNV	11AC20MIMO	Ant1	5320	30~1000	35.76	-77.61	≤-54	0.01734	≤4	PASS
NTNV	11AC20MIMO	Ant2	5320	30~1000	32.97	-78.42	≤-54	0.01439	≤4	PASS
NTNV	11AC20MIMO	Ant1	5320	1000~26000	22098.10	-62.36	≤-47	0.58076	≤20	PASS
NTNV	11AC20MIMO	Ant2	5320	1000~26000	19164.40	-62.85	≤-47	0.51880	≤20	PASS
NTNV	11AC20MIMO	Ant1	5500	30~1000	32.36	-78.92	≤-54	0.01282	≤4	PASS
NTNV	11AC20MIMO	Ant2	5500	30~1000	35.15	-78.67	≤-54	0.01358	≤4	PASS
NTNV	11AC20MIMO	Ant1	5500	1000~26000	21941.90	-63.21	≤-47	0.47753	≤20	PASS
NTNV	11AC20MIMO	Ant2	5500	1000~26000	22243.10	-63.03	≤-47	0.49774	≤20	PASS
NTNV	11AC20MIMO	Ant1	5580	30~1000	35.03	-77.81	≤-54	0.01656	≤4	PASS
NTNV	11AC20MIMO	Ant2	5580	30~1000	35.76	-77.50	≤-54	0.01778	≤4	PASS
NTNV	11AC20MIMO	Ant1	5580	1000~26000	22075.60	-62.75	≤-47	0.53088	≤20	PASS
NTNV	11AC20MIMO	Ant2	5580	1000~26000	22083.10	-63.09	≤-47	0.49091	≤20	PASS
NTNV	11AC20MIMO	Ant1	5700	30~1000	33.21	-77.88	≤-54	0.01629	≤4	PASS
NTNV	11AC20MIMO	Ant2	5700	30~1000	36.00	-78.14	≤-54	0.01535	≤4	PASS
NTNV	11AC20MIMO	Ant1	5700	1000~26000	22201.90	-62.33	≤-47	0.58479	≤20	PASS
NTNV	11AC20MIMO	Ant2	5700	1000~26000	21895.60	-63.06	≤-47	0.49431	≤20	PASS
NTNV	11AC40MIMO	Ant1	5190	30~1000	36.00	-79.45	≤-54	0.01135	≤4	PASS
NTNV	11AC40MIMO	Ant2	5190	30~1000	43.76	-78.37	≤-54	0.01455	≤4	PASS
NTNV	11AC40MIMO	Ant1	5190	1000~26000	2613.10	-60.09	≤-47	0.97949	≤20	PASS
NTNV	11AC40MIMO	Ant2	5190	1000~26000	22075.60	-62.85	≤-47	0.51880	≤20	PASS
NTNV	11AC40MIMO	Ant1	5230	30~1000	35.39	-77.69	≤-54	0.01702	≤4	PASS
NTNV	11AC40MIMO	Ant2	5230	30~1000	30.79	-78.88	≤-54	0.01294	≤4	PASS
NTNV	11AC40MIMO	Ant1	5230	1000~26000	22120.60	-62.95	≤-47	0.50699	≤20	PASS
NTNV	11AC40MIMO	Ant2	5230	1000~26000	19280.60	-62.39	≤-47	0.57677	≤20	PASS
NTNV	11AC40MIMO	Ant1	5270	30~1000	33.94	-78.68	≤-54	0.01355	≤4	PASS
NTNV	11AC40MIMO	Ant2	5270	30~1000	32.85	-78.16	≤-54	0.01528	≤4	PASS
NTNV	11AC40MIMO	Ant1	5270	1000~26000	21346.90	-63.54	≤-47	0.44259	≤20	PASS
NTNV	11AC40MIMO	Ant2	5270	1000~26000	22184.40	-63.27	≤-47	0.47098	≤20	PASS
NTNV	11AC40MIMO	Ant1	5310	30~1000	35.03	-78.32	≤-54	0.01472	≤4	PASS
NTNV	11AC40MIMO	Ant2	5310	30~1000	32.24	-78.31	≤-54	0.01476	≤4	PASS
NTNV	11AC40MIMO	Ant1	5310	1000~26000	21560.60	-62.43	≤-47	0.57148	≤20	PASS
NTNV	11AC40MIMO	Ant2	5310	1000~26000	21440.60	-62.89	≤-47	0.51404	≤20	PASS
NTNV	11AC40MIMO	Ant1	5510	30~1000	33.21	-78.32	≤-54	0.01472	≤4	PASS
NTNV	11AC40MIMO	Ant2	5510	30~1000	36.00	-77.30	≤-54	0.01862	≤4	PASS
NTNV	11AC40MIMO	Ant1	5510	1000~26000	22038.10	-62.38	≤-47	0.57810	≤20	PASS
NTNV	11AC40MIMO	Ant2	5510	1000~26000	22099.40	-62.86	≤-47	0.51761	≤20	PASS
NTNV	11AC40MIMO	Ant1	5550	30~1000	34.91	-79.18	≤-54	0.01208	≤4	PASS
NTNV	11AC40MIMO	Ant2	5550	30~1000	35.03	-78.05	≤-54	0.01567	≤4	PASS
NTNV	11AC40MIMO	Ant1	5550	1000~26000	22109.40	-63.34	≤-47	0.46345	≤20	PASS
NTNV	11AC40MIMO	Ant2	5550	1000~26000	22060.60	-63.30	≤-47	0.46774	≤20	PASS
NTNV	11AC40MIMO	Ant1	5670	30~1000	30.06	-77.57	≤-54	0.01750	≤4	PASS
NTNV	11AC40MIMO	Ant2	5670	30~1000	34.43	-77.44	≤-54	0.01803	≤4	PASS
NTNV	11AC40MIMO	Ant1	5670	1000~26000	22568.10	-62.86	≤-47	0.51761	≤20	PASS
NTNV	11AC40MIMO	Ant2	5670	1000~26000	21961.90	-62.40	≤-47	0.57544	≤20	PASS
NTNV	11AC80MIMO	Ant1	5210	30~1000	30.30	-79.42	≤-54	0.01143	≤4	PASS
NTNV	11AC80MIMO	Ant2	5210	30~1000	36.00	-78.62	≤-54	0.01374	≤4	PASS
NTNV	11AC80MIMO	Ant1	5210	1000~26000	22040.60	-63.03	≤-47	0.49774	≤20	PASS
NTNV	11AC80MIMO	Ant2	5210	1000~26000	22209.40	-63.26	≤-47	0.47206	≤20	PASS
NTNV	11AC80MIMO	Ant1	5290	30~1000	34.30	-79.52	≤-54	0.01117	≤4	PASS
NTNV	11AC80MIMO	Ant2	5290	30~1000	35.52	-77.20	≤-54	0.01905	≤4	PASS
NTNV	11AC80MIMO	Ant1	5290	1000~26000	22026.90	-62.59	≤-47	0.55081	≤20	PASS
NTNV	11AC80MIMO	Ant2	5290	1000~26000	21988.10	-62.60	≤-47	0.54954	≤20	PASS
NTNV	11AC80MIMO	Ant1	5530	30~1000	32.85	-78.49	≤-54	0.01416	≤4	PASS
NTNV	11AC80MIMO	Ant2	5530	30~1000	32.73	-77.99	≤-54	0.01589	≤4	PASS
NTNV	11AC80MIMO	Ant1	5530	1000~26000	22033.10	-62.77	≤-47	0.52845	≤20	PASS
NTNV	11AC80MIMO	Ant2	5530	1000~26000	22101.90	-62.89	≤-47	0.51404	≤20	PASS
NTNV	11AC160MIMO	Ant1	5250	30~1000	35.27	-78.55	≤-54	0.01396	≤4	PASS
NTNV	11AC160MIMO	Ant2	5250	30~1000	36.00	-78.30	≤-54	0.01479	≤4	PASS
NTNV	11AC160MIMO	Ant1	5250	1000~26000	21914.40	-63.22	≤-47	0.47643	≤20	PASS
NTNV	11AC160MIMO	Ant2	5250	1000~26000	22565.60	-63.09	≤-47	0.49091	≤20	PASS
NTNV	11AC160MIMO	Ant1	5570	30~1000	32.24	-78.50	≤-54	0.01413	≤4	PASS
NTNV	11AC160MIMO	Ant2	5570	30~1000	32.00	-78.95	≤-54	0.01274	≤4	PASS
NTNV	11AC160MIMO	Ant1	5570	1000~26000	22020.60	-63.19	≤-47	0.47973	≤20	PASS
NTNV	11AC160MIMO	Ant2	5570	1000~26000	21521.90	-62.82	≤-47	0.52240	≤20	PASS
NTNV	11AX20MIMO	Ant1	5180	30~1000	33.33	-79.12	≤-54	0.01225	≤4	PASS
NTNV	11AX20MIMO	Ant2	5180	30~1000	35.52	-77.73	≤-54	0.01687	≤4	PASS
NTNV	11AX20MIMO	Ant1	5180	1000~26000	21960.60	-63.06	≤-47	0.49431	≤20	PASS
NTNV	11AX20MIMO	Ant2	5180	1000~26000	22206.90	-63.00	≤-47	0.50119	≤20	PASS
NTNV	11AX20MIMO	Ant1	5200	30~1000	35.88	-79.24	≤-54	0.01191	≤4	PASS
NTNV	11AX20MIMO	Ant2	5200	30~1000	33.33	-78.56	≤-54	0.01393	≤4	PASS
NTNV	11AX20MIMO	Ant1	5200	1000~26000	22075.60	-63.27	≤-47	0.47098	≤20	PASS
NTNV	11AX20MIMO	Ant2	5200	1000~26000	22709.40	-62.97	≤-47	0.50466	≤20	PASS
NTNV	11AX20MIMO	Ant1	5240	30~1000	33.21	-78.15	≤-54	0.01531	≤4	PASS
NTNV	11AX20MIMO	Ant2	5240	30~1000	39.64	-79.70	≤-54	0.01072	≤4	PASS


NTNV	11AX20MIMO	Ant1	5240	1000-26000	22126.90	-63.04	≤-47	0.49659	≤20	PASS
NTNV	11AX20MIMO	Ant2	5240	1000-26000	2533.10	-58.47	≤-47	1.42233	≤20	PASS
NTNV	11AX20MIMO	Ant1	5260	30~1000	33.70	-78.69	≤-54	0.01352	≤4	PASS
NTNV	11AX20MIMO	Ant2	5260	30~1000	31.52	-78.19	≤-54	0.01517	≤4	PASS
NTNV	11AX20MIMO	Ant1	5260	1000-26000	22018.10	-62.90	≤-47	0.51286	≤20	PASS
NTNV	11AX20MIMO	Ant2	5260	1000-26000	22130.60	-63.36	≤-47	0.46132	≤20	PASS
NTNV	11AX20MIMO	Ant1	5280	30~1000	30.42	-78.32	≤-54	0.01472	≤4	PASS
NTNV	11AX20MIMO	Ant2	5280	30~1000	30.79	-78.38	≤-54	0.01452	≤4	PASS
NTNV	11AX20MIMO	Ant1	5280	1000-26000	22066.90	-63.37	≤-47	0.46026	≤20	PASS
NTNV	11AX20MIMO	Ant2	5280	1000-26000	22294.40	-62.62	≤-47	0.54702	≤20	PASS
NTNV	11AX20MIMO	Ant1	5320	30~1000	35.03	-77.08	≤-54	0.01959	≤4	PASS
NTNV	11AX20MIMO	Ant2	5320	30~1000	34.43	-77.65	≤-54	0.01718	≤4	PASS
NTNV	11AX20MIMO	Ant1	5320	1000-26000	22099.40	-62.89	≤-47	0.51404	≤20	PASS
NTNV	11AX20MIMO	Ant2	5320	1000-26000	3498.10	-60.62	≤-47	0.86696	≤20	PASS
NTNV	11AX20MIMO	Ant1	5500	30~1000	33.70	-78.85	≤-54	0.01303	≤4	PASS
NTNV	11AX20MIMO	Ant2	5500	30~1000	35.27	-78.93	≤-54	0.01279	≤4	PASS
NTNV	11AX20MIMO	Ant1	5500	1000-26000	22174.40	-62.33	≤-47	0.58479	≤20	PASS
NTNV	11AX20MIMO	Ant2	5500	1000-26000	22086.90	-63.02	≤-47	0.49888	≤20	PASS
NTNV	11AX20MIMO	Ant1	5580	30~1000	34.18	-77.15	≤-54	0.01531	≤4	PASS
NTNV	11AX20MIMO	Ant2	5580	30~1000	34.18	-77.95	≤-54	0.01603	≤4	PASS
NTNV	11AX20MIMO	Ant1	5580	1000-26000	22079.40	-62.67	≤-47	0.54075	≤20	PASS
NTNV	11AX20MIMO	Ant2	5580	1000-26000	22771.90	-62.84	≤-47	0.52000	≤20	PASS
NTNV	11AX20MIMO	Ant1	5700	30~1000	33.21	-77.83	≤-54	0.01648	≤4	PASS
NTNV	11AX20MIMO	Ant2	5700	30~1000	34.43	-77.90	≤-54	0.01622	≤4	PASS
NTNV	11AX20MIMO	Ant1	5700	1000-26000	22006.90	-62.09	≤-47	0.61802	≤20	PASS
NTNV	11AX20MIMO	Ant2	5700	1000-26000	22233.10	-62.65	≤-47	0.54325	≤20	PASS
NTNV	11AX40MIMO	Ant1	5190	30~1000	35.76	-78.24	≤-54	0.01500	≤4	PASS
NTNV	11AX40MIMO	Ant2	5190	30~1000	33.58	-78.75	≤-54	0.01334	≤4	PASS
NTNV	11AX40MIMO	Ant1	5190	1000-26000	22089.40	-62.62	≤-47	0.54702	≤20	PASS
NTNV	11AX40MIMO	Ant2	5190	1000-26000	22031.90	-63.13	≤-47	0.48641	≤20	PASS
NTNV	11AX40MIMO	Ant1	5230	30~1000	34.55	-78.53	≤-54	0.01403	≤4	PASS
NTNV	11AX40MIMO	Ant2	5230	30~1000	30.42	-78.73	≤-54	0.01340	≤4	PASS
NTNV	11AX40MIMO	Ant1	5230	1000-26000	22648.10	-63.10	≤-47	0.48978	≤20	PASS
NTNV	11AX40MIMO	Ant2	5230	1000-26000	22091.90	-61.63	≤-47	0.68707	≤20	PASS
NTNV	11AX40MIMO	Ant1	5270	30~1000	36.00	-78.35	≤-54	0.01462	≤4	PASS
NTNV	11AX40MIMO	Ant2	5270	30~1000	31.64	-77.40	≤-54	0.01820	≤4	PASS
NTNV	11AX40MIMO	Ant1	5270	1000-26000	22168.10	-63.16	≤-47	0.48306	≤20	PASS
NTNV	11AX40MIMO	Ant2	5270	1000-26000	2533.10	-61.36	≤-47	0.73114	≤20	PASS
NTNV	11AX40MIMO	Ant1	5310	30~1000	34.06	-77.69	≤-54	0.01702	≤4	PASS
NTNV	11AX40MIMO	Ant2	5310	30~1000	34.18	-78.41	≤-54	0.01442	≤4	PASS
NTNV	11AX40MIMO	Ant1	5310	1000-26000	3455.60	-60.22	≤-47	0.95060	≤20	PASS
NTNV	11AX40MIMO	Ant2	5310	1000-26000	22405.60	-62.62	≤-47	0.54702	≤20	PASS
NTNV	11AX40MIMO	Ant1	5510	30~1000	34.06	-77.99	≤-54	0.01589	≤4	PASS
NTNV	11AX40MIMO	Ant2	5510	30~1000	32.36	-78.44	≤-54	0.01432	≤4	PASS
NTNV	11AX40MIMO	Ant1	5510	1000-26000	22210.60	-63.45	≤-47	0.45186	≤20	PASS
NTNV	11AX40MIMO	Ant2	5510	1000-26000	22314.40	-62.89	≤-47	0.51404	≤20	PASS
NTNV	11AX40MIMO	Ant1	5670	30~1000	35.64	-78.52	≤-54	0.01406	≤4	PASS
NTNV	11AX40MIMO	Ant2	5670	30~1000	32.36	-78.43	≤-54	0.01435	≤4	PASS
NTNV	11AX40MIMO	Ant1	5670	1000-26000	22106.90	-62.61	≤-47	0.54828	≤20	PASS
NTNV	11AX40MIMO	Ant2	5670	1000-26000	19024.40	-63.09	≤-47	0.49091	≤20	PASS
NTNV	11AX80MIMO	Ant1	5210	30~1000	35.39	-78.79	≤-54	0.01321	≤4	PASS
NTNV	11AX80MIMO	Ant2	5210	30~1000	34.67	-78.58	≤-54	0.01387	≤4	PASS
NTNV	11AX80MIMO	Ant1	5210	1000-26000	21995.60	-62.80	≤-47	0.52481	≤20	PASS
NTNV	11AX80MIMO	Ant2	5210	1000-26000	21590.60	-62.55	≤-47	0.55590	≤20	PASS
NTNV	11AX80MIMO	Ant1	5290	30~1000	35.39	-78.13	≤-54	0.01538	≤4	PASS
NTNV	11AX80MIMO	Ant2	5290	30~1000	30.42	-78.19	≤-54	0.01517	≤4	PASS
NTNV	11AX80MIMO	Ant1	5290	1000-26000	22225.60	-63.09	≤-47	0.49091	≤20	PASS
NTNV	11AX80MIMO	Ant2	5290	1000-26000	21475.60	-63.38	≤-47	0.45920	≤20	PASS
NTNV	11AX80MIMO	Ant1	5530	30~1000	34.67	-78.26	≤-54	0.01493	≤4	PASS
NTNV	11AX80MIMO	Ant2	5530	30~1000	33.46	-77.51	≤-54	0.01774	≤4	PASS
NTNV	11AX80MIMO	Ant1	5530	1000-26000	22215.60	-63.21	≤-47	0.47753	≤20	PASS
NTNV	11AX80MIMO	Ant2	5530	1000-26000	21960.60	-63.08	≤-47	0.49204	≤20	PASS
NTNV	11AX160MIMO	Ant1	5250	30~1000	30.67	-78.17	≤-54	0.01524	≤4	PASS
NTNV	11AX160MIMO	Ant2	5250	30~1000	35.27	-79.30	≤-54	0.01175	≤4	PASS
NTNV	11AX160MIMO	Ant1	5250	1000-26000	22118.10	-62.86	≤-47	0.51761	≤20	PASS
NTNV	11AX160MIMO	Ant2	5250	1000-26000	21905.60	-63.41	≤-47	0.45604	≤20	PASS
NTNV	11AX160MIMO	Ant1	5570	30~1000	33.82	-78.71	≤-54	0.01346	≤4	PASS
NTNV	11AX160MIMO	Ant2	5570	30~1000	35.52	-78.40	≤-54	0.01445	≤4	PASS
NTNV	11AX160MIMO	Ant1	5570	1000-26000	22203.10	-62.57	≤-47	0.55335	≤20	PASS
NTNV	11AX160MIMO	Ant2	5570	1000-26000	22221.90	-62.94	≤-47	0.50816	≤20	PASS

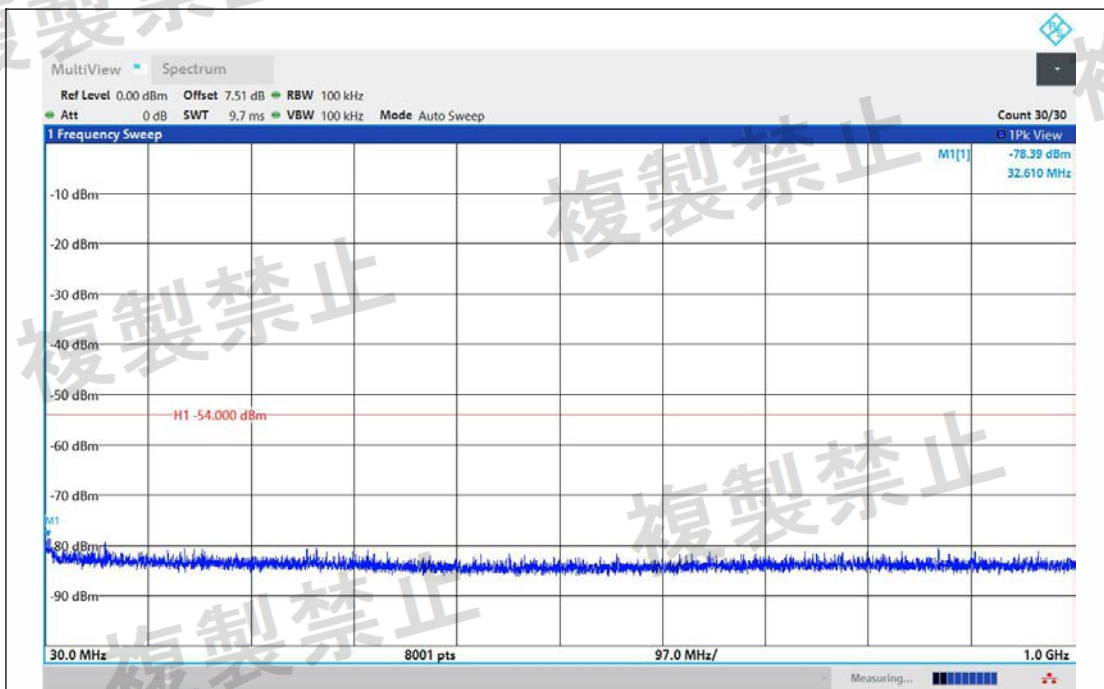


NTNV-11A-Ant1-5180-30~1000-PASS

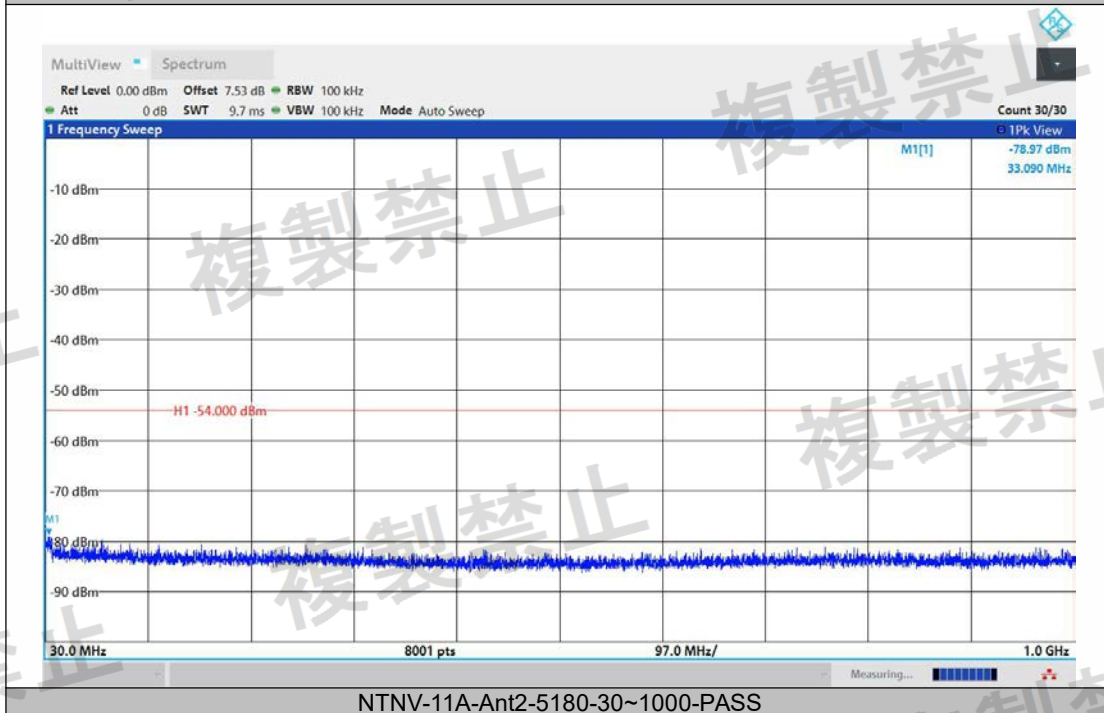


NTNV-11A-Ant2-5180-30~1000-PASS

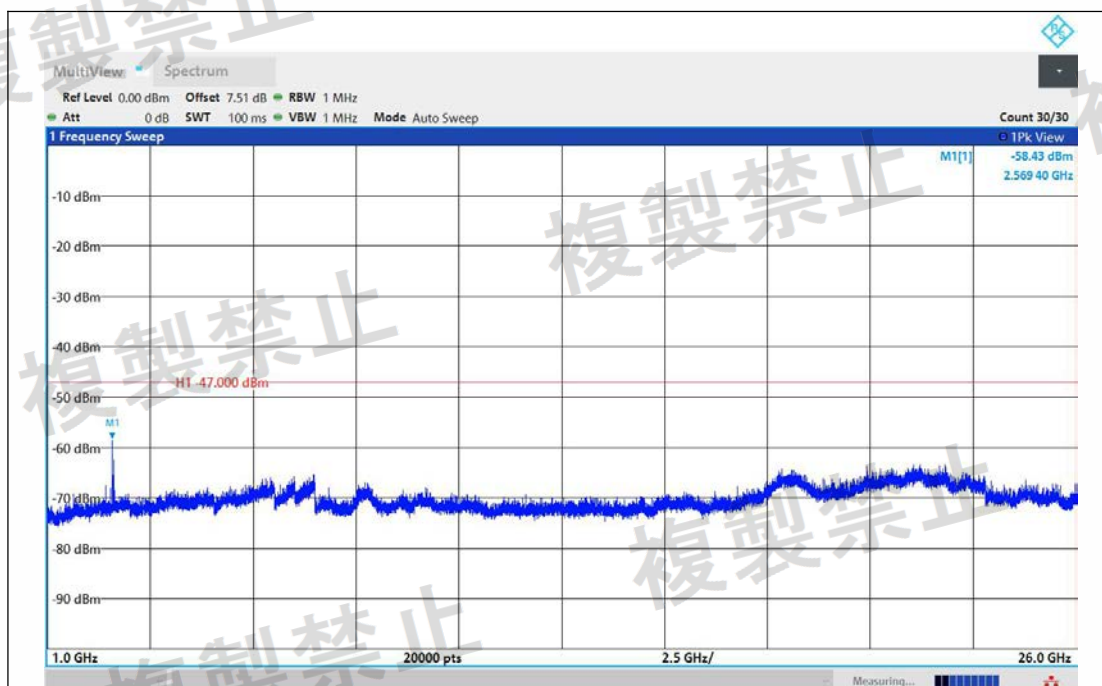


NTNV-11A-Ant1-5180-1000~26000-PASS

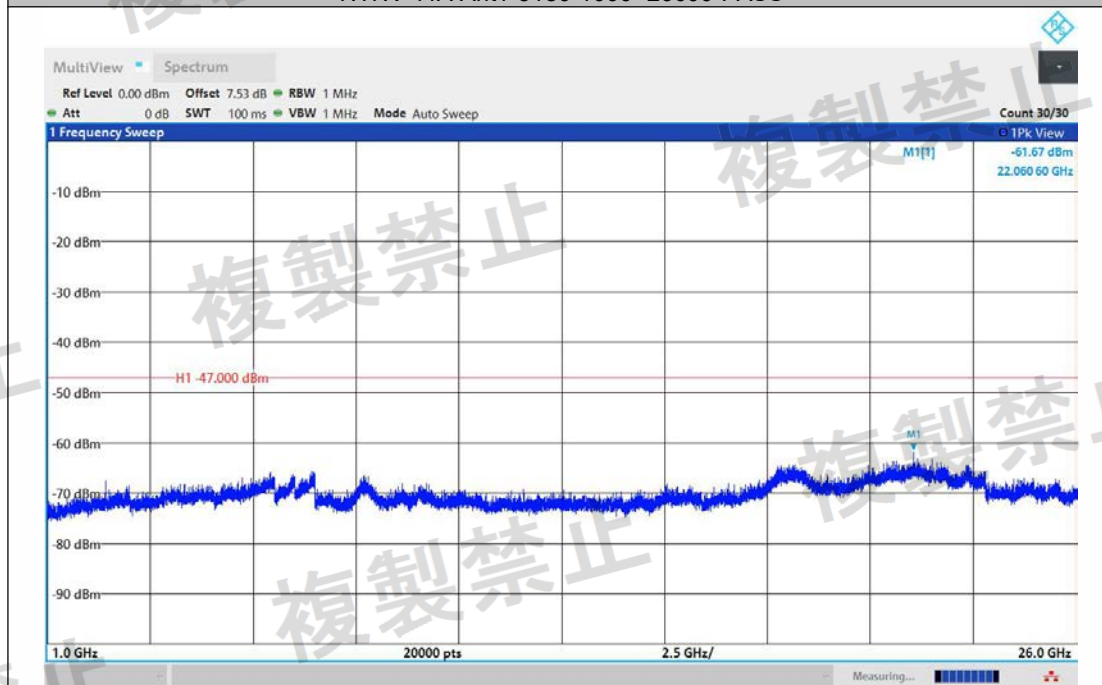


NTNV-11A-Ant2-5180-1000~26000-PASS

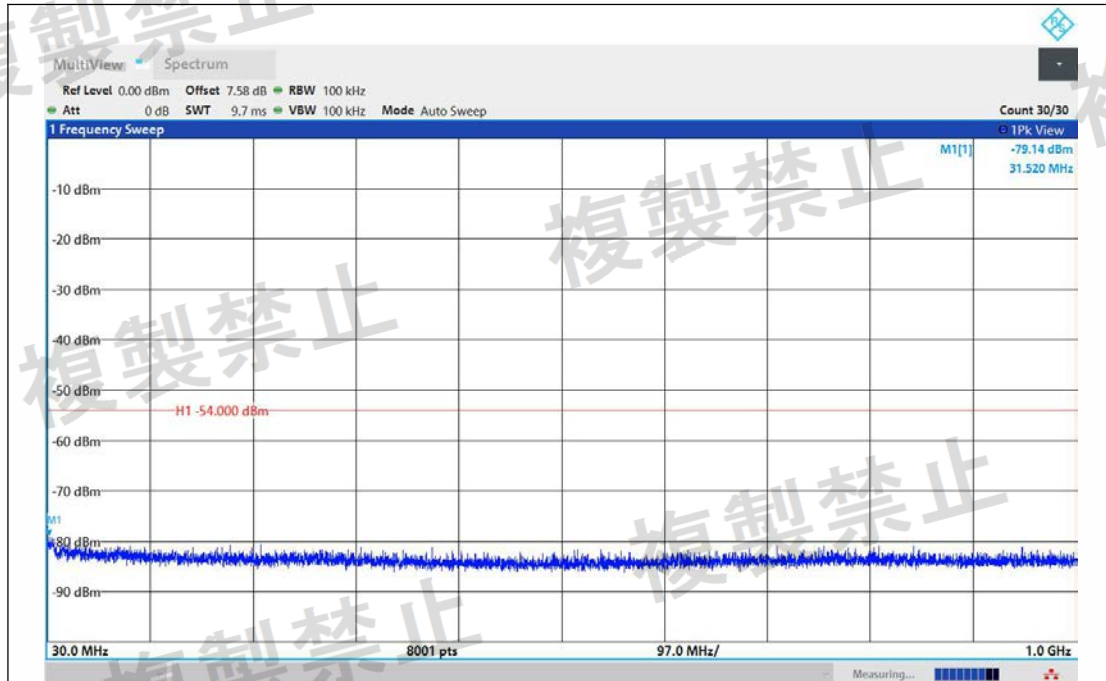


NTNV-11A-Ant1-5200-30~1000-PASS

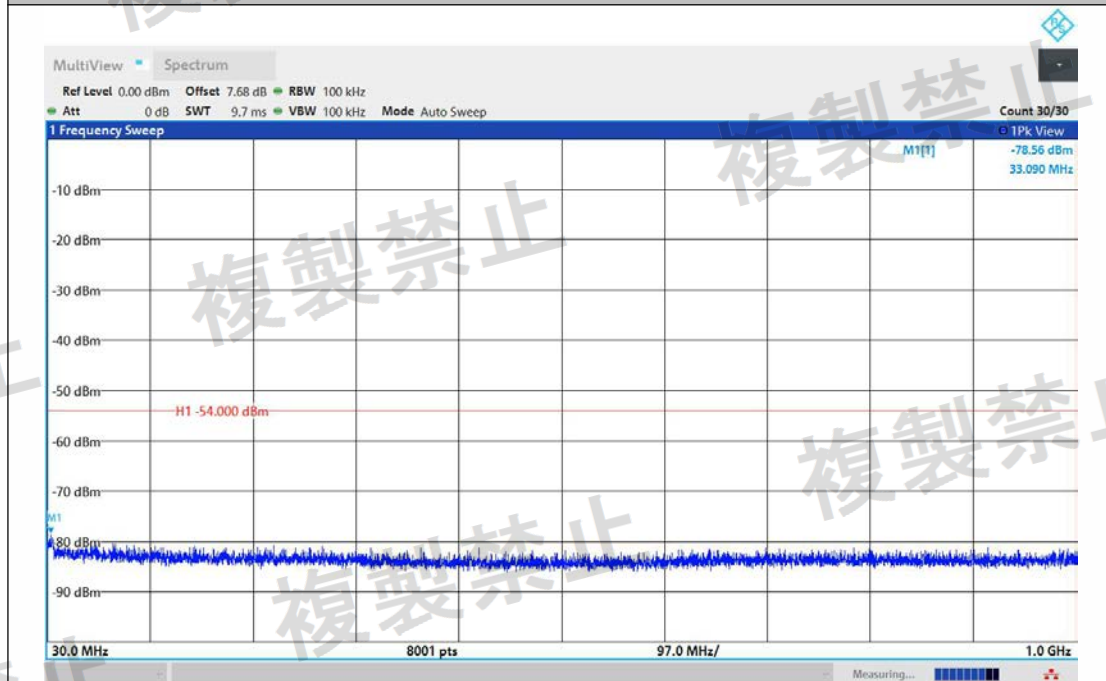


NTNV-11A-Ant2-5200-30~1000-PASS

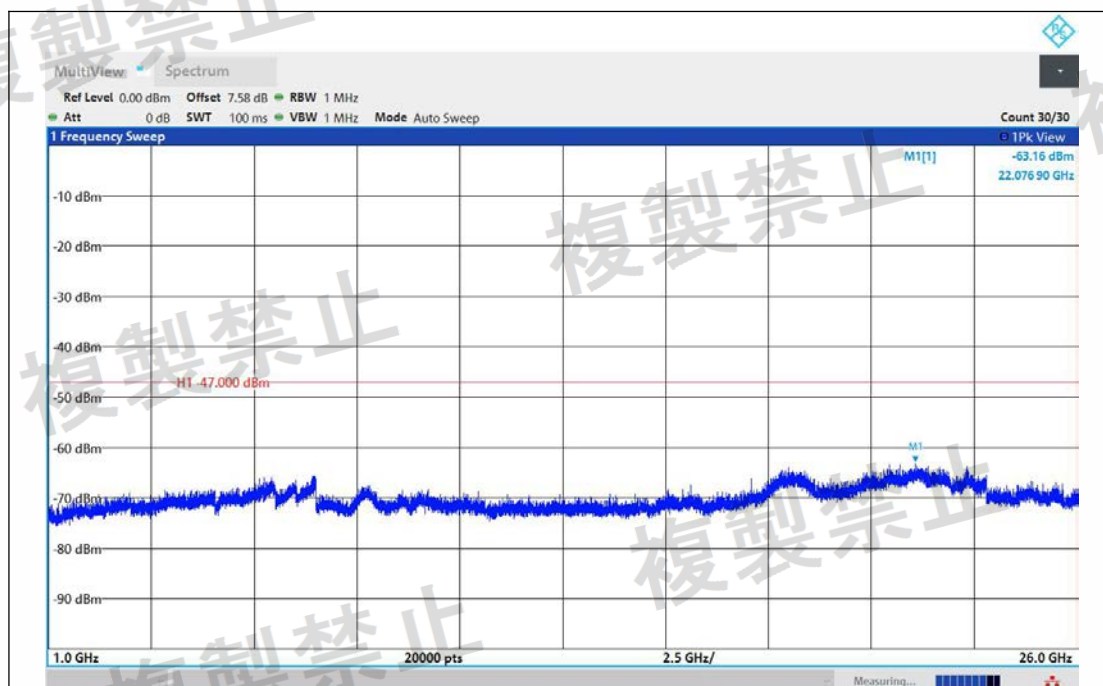


NTNV-11A-Ant1-5200-1000~26000-PASS

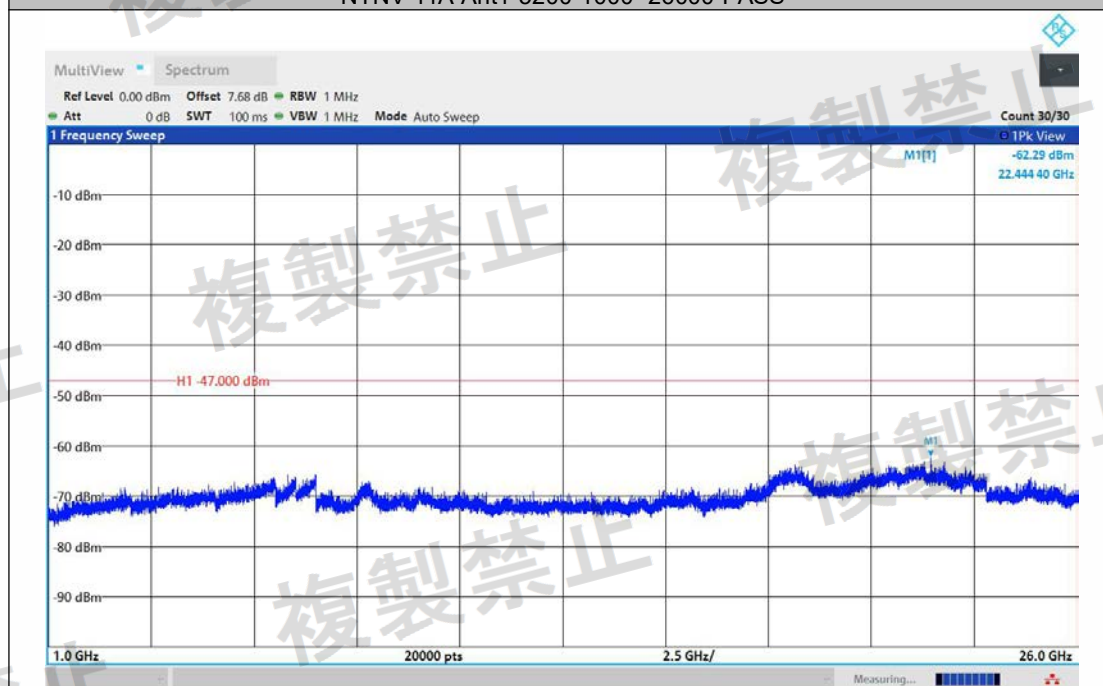


NTNV-11A-Ant2-5200-1000~26000-PASS

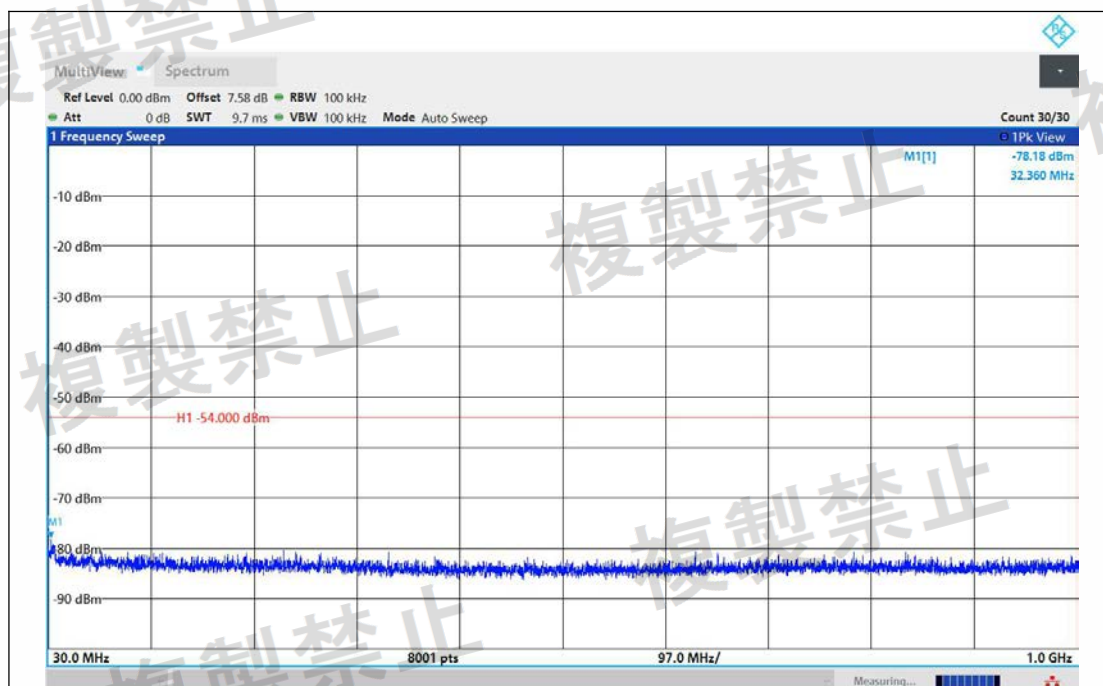


NTNV-11A-Ant1-5240-30~1000-PASS

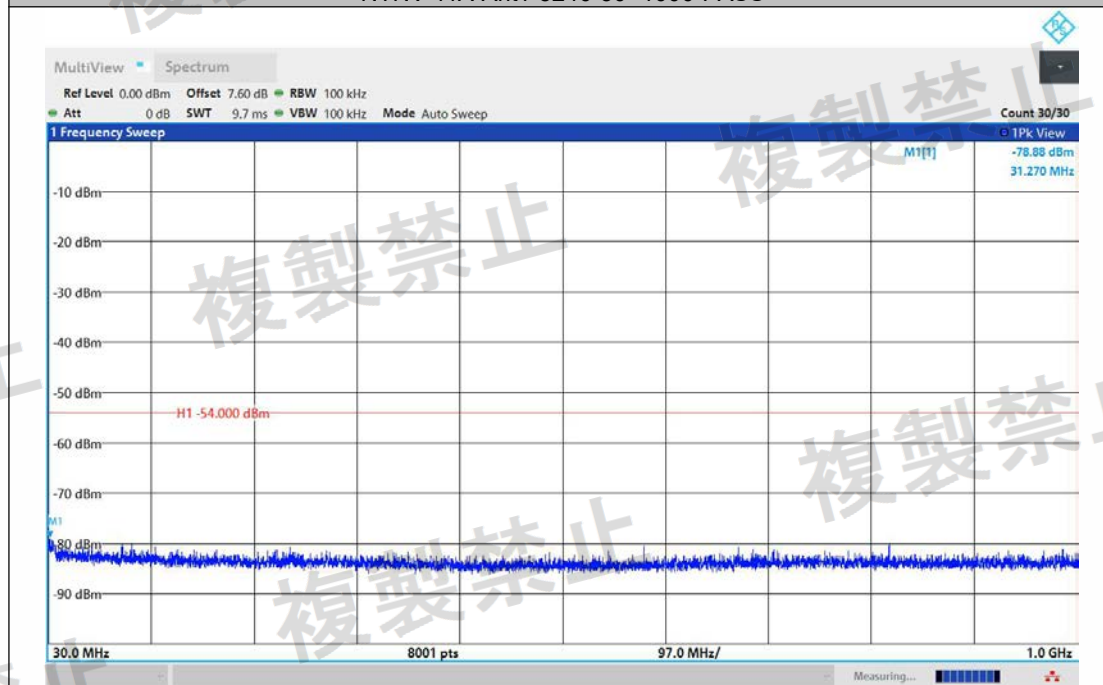


NTNV-11A-Ant2-5240-30~1000-PASS

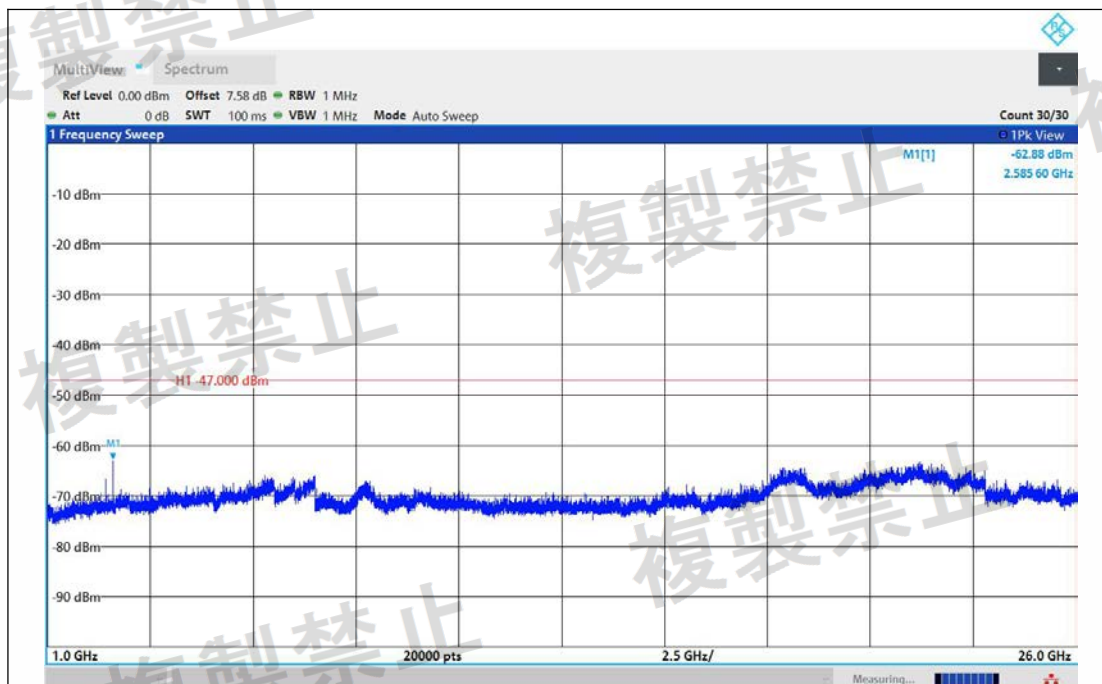


NTNV-11A-Ant1-5240-1000~26000-PASS

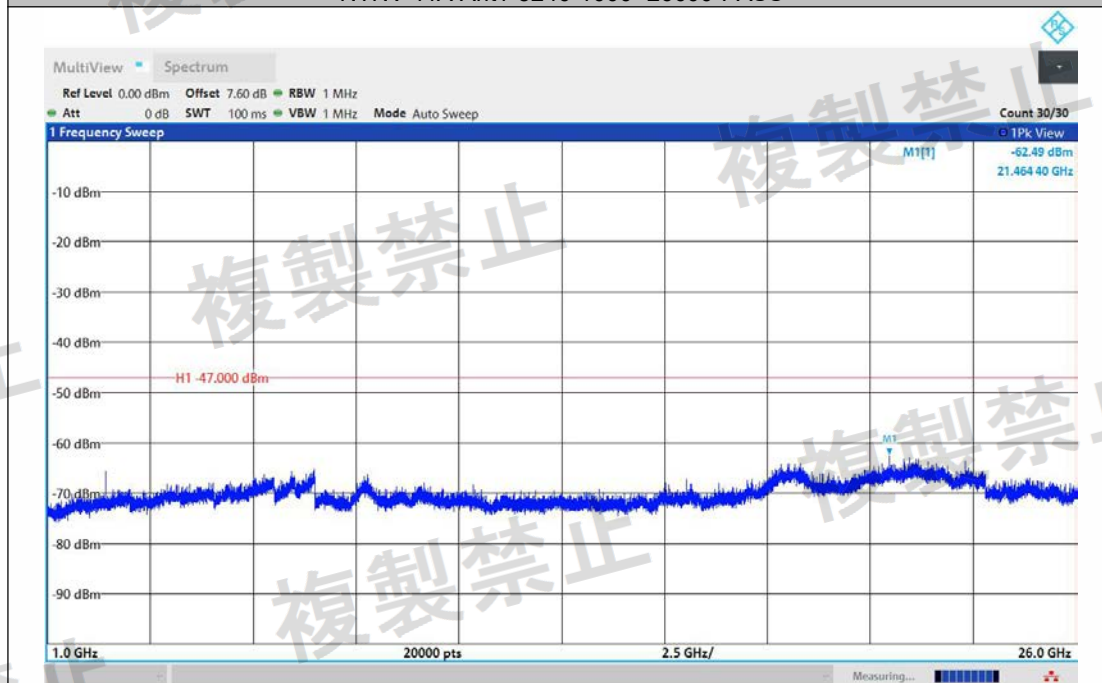


NTNV-11A-Ant2-5240-1000~26000-PASS

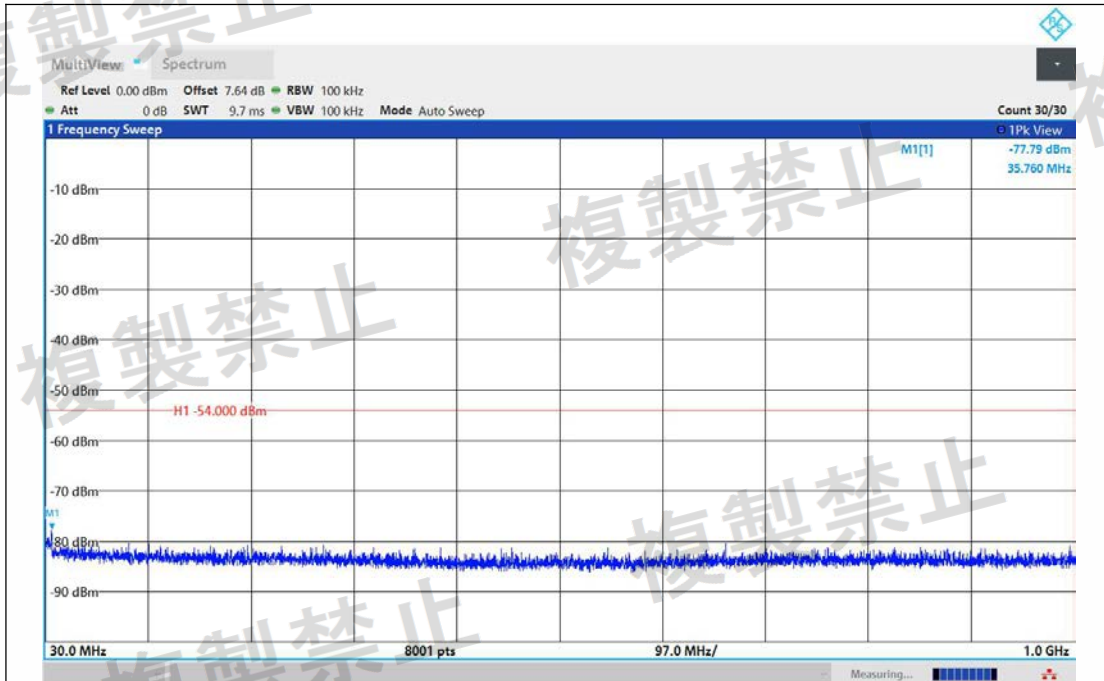


NTNV-11A-Ant1-5260-30~1000-PASS

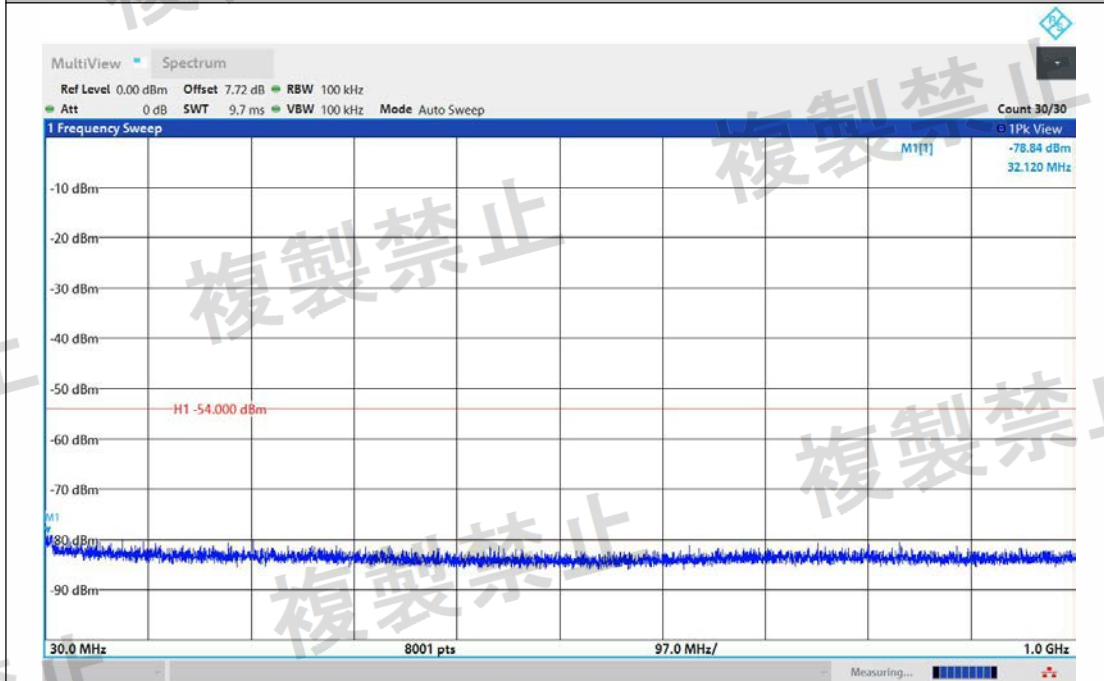


NTNV-11A-Ant2-5260-30~1000-PASS

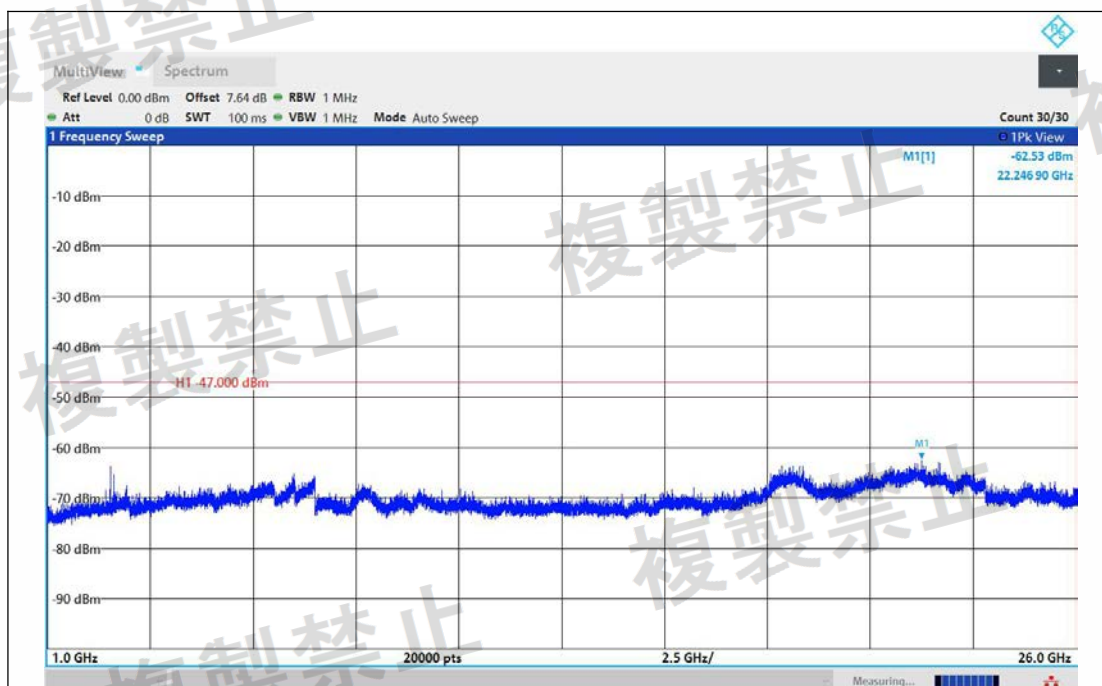


NTNV-11A-Ant1-5260-1000~26000-PASS

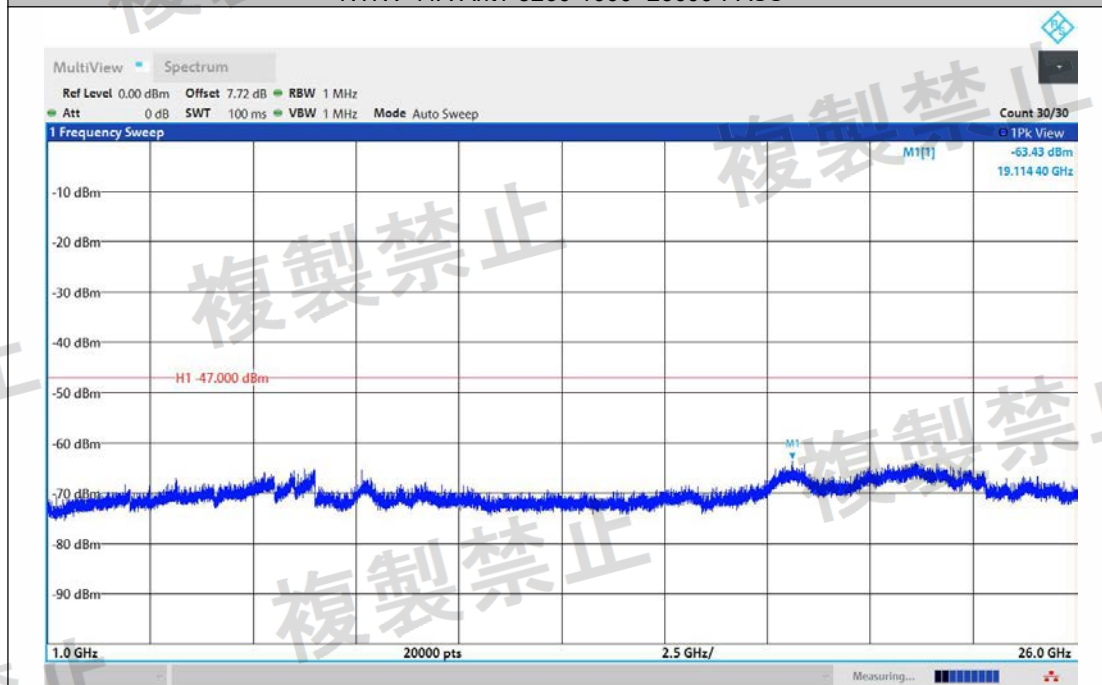



NTNV-11A-Ant2-5260-1000~26000-PASS

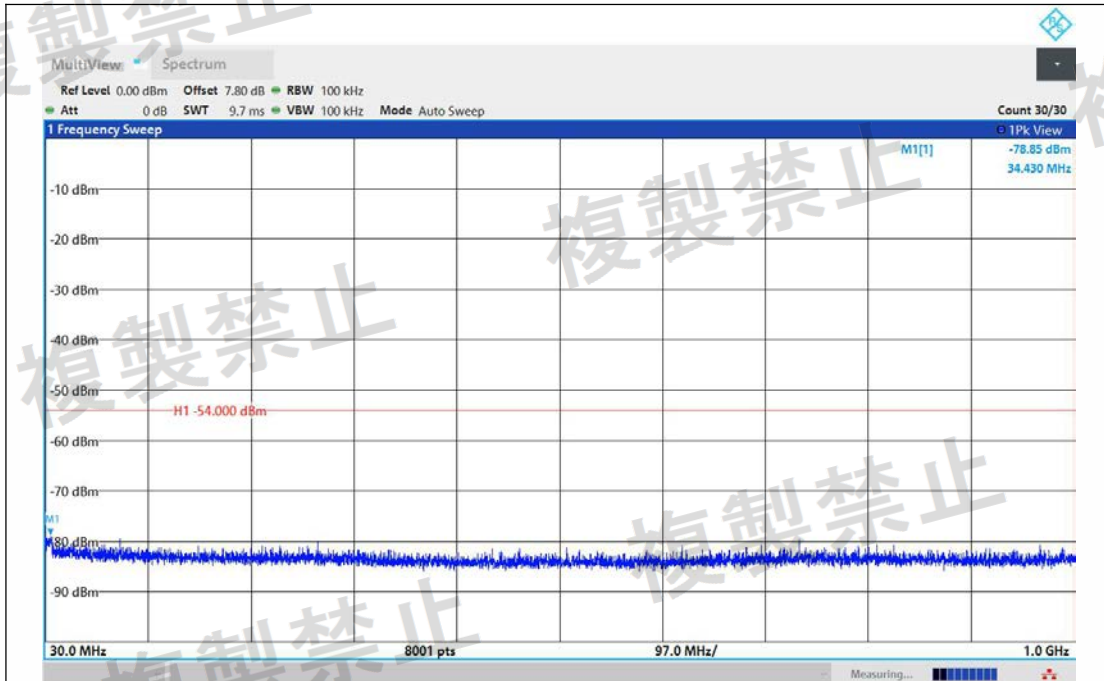


NTNV-11A-Ant1-5280-30~1000-PASS

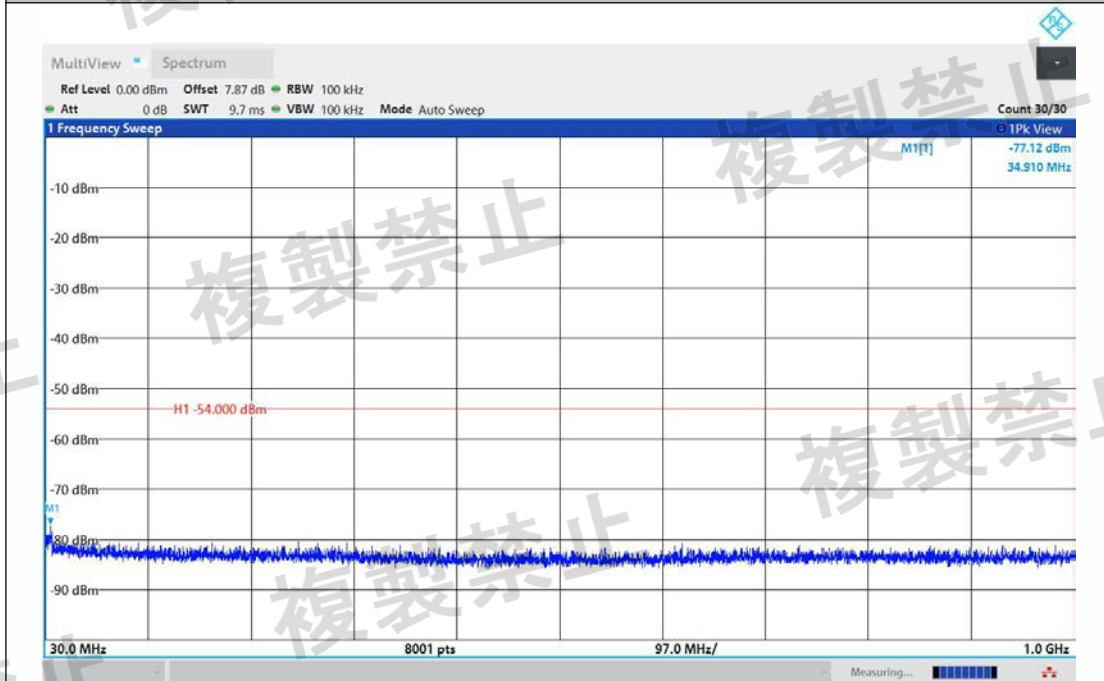


NTNV-11A-Ant2-5280-30~1000-PASS

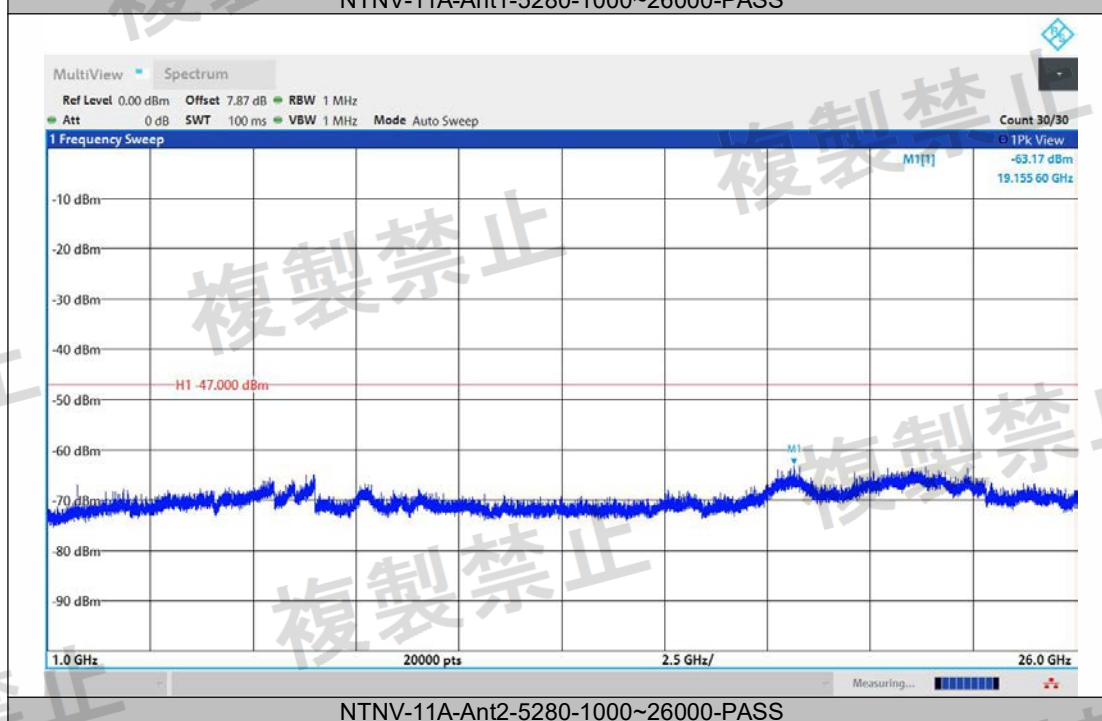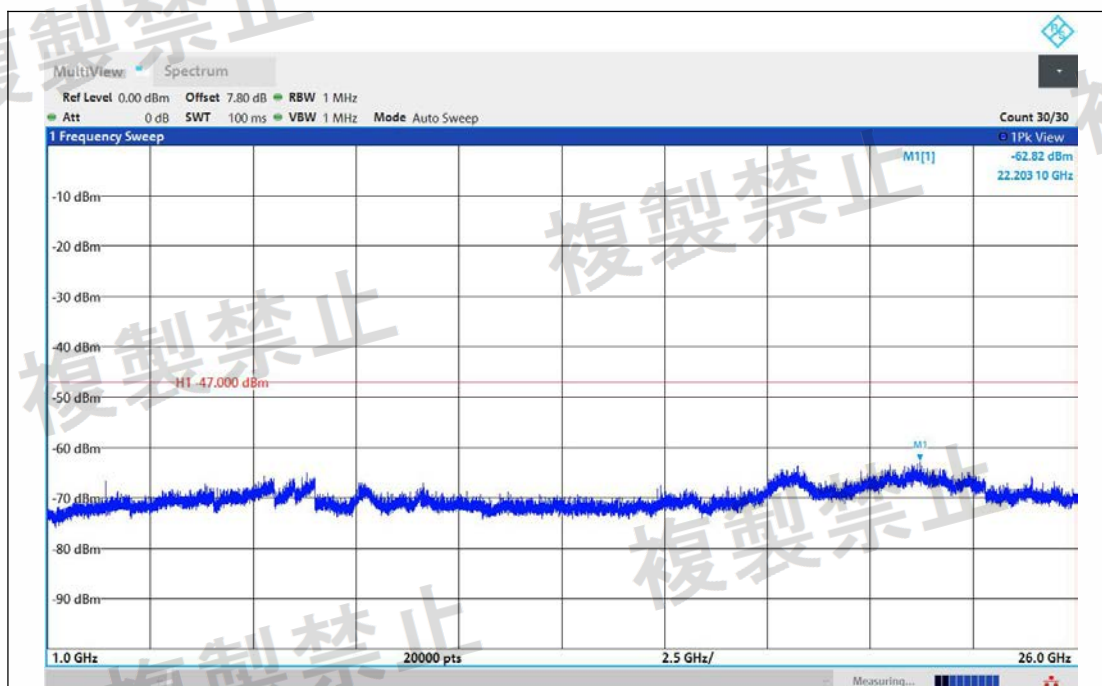


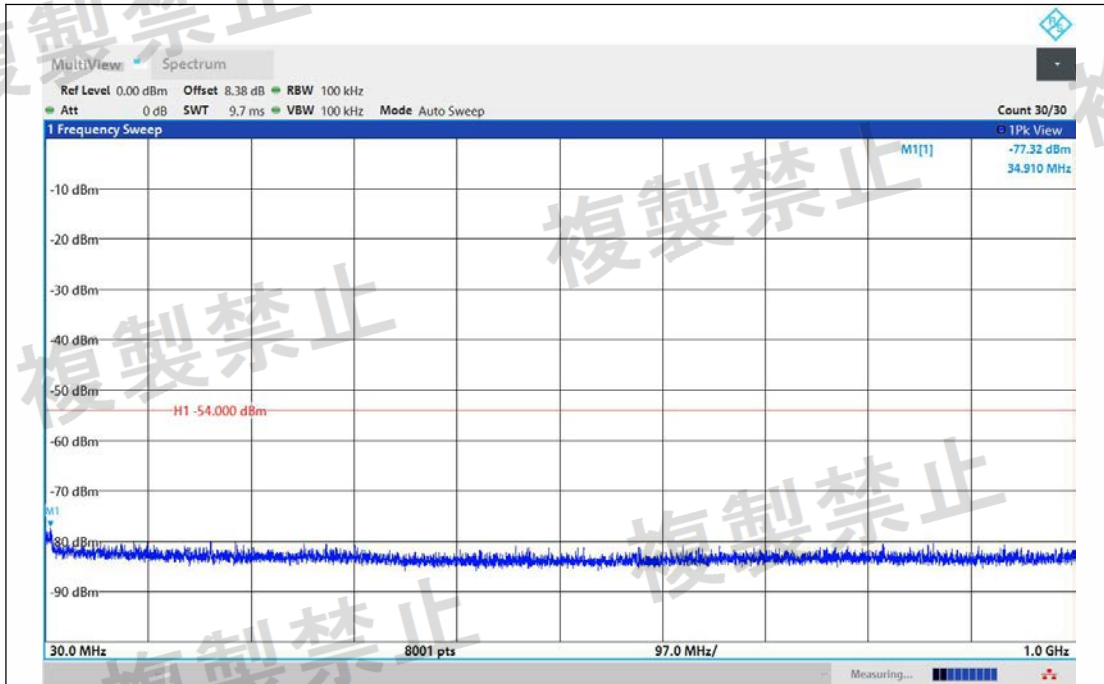


NTNV-11A-Ant1-5320-30~1000-PASS

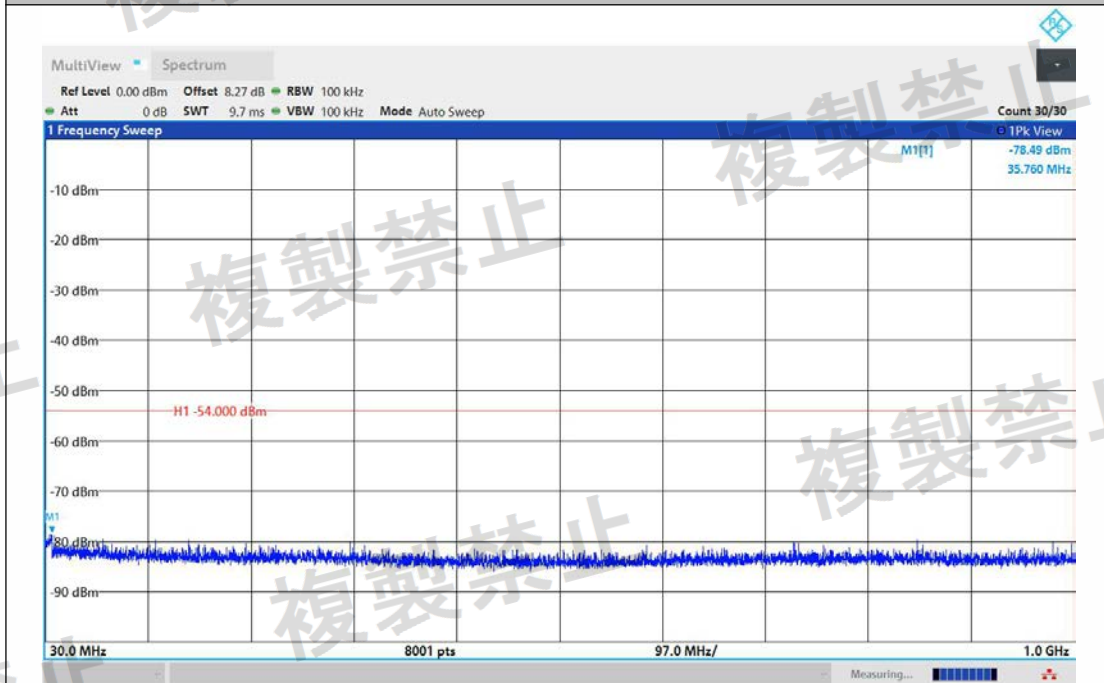


NTNV-11A-Ant2-5320-30~1000-PASS

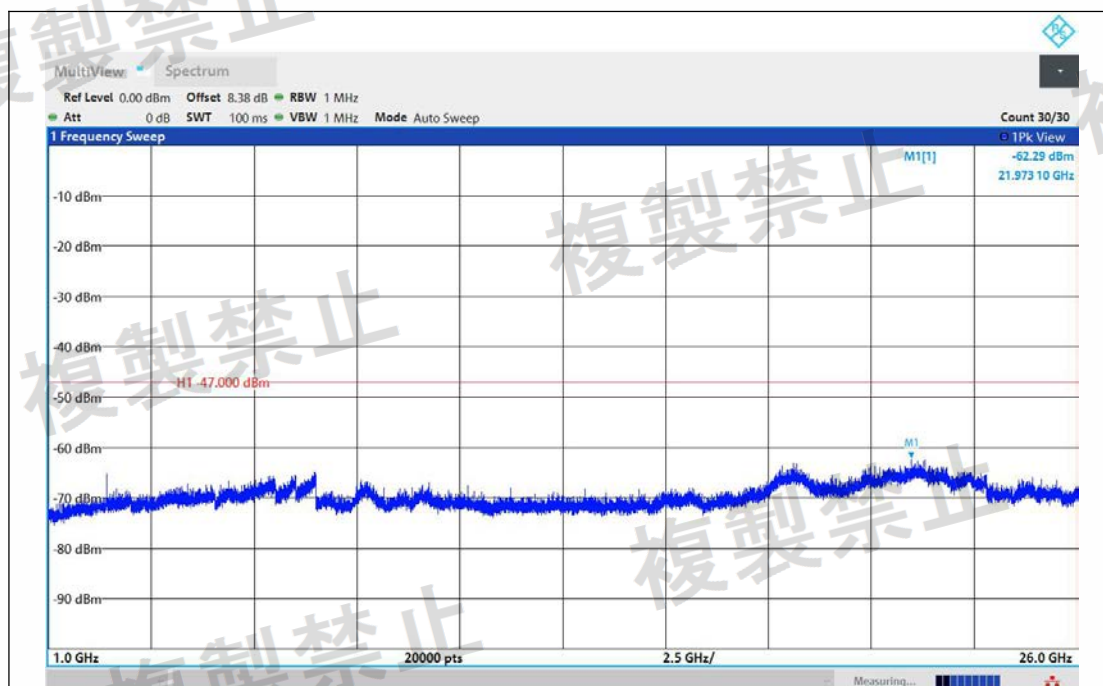


NTNV-11A-Ant1-5320-1000~26000-PASS

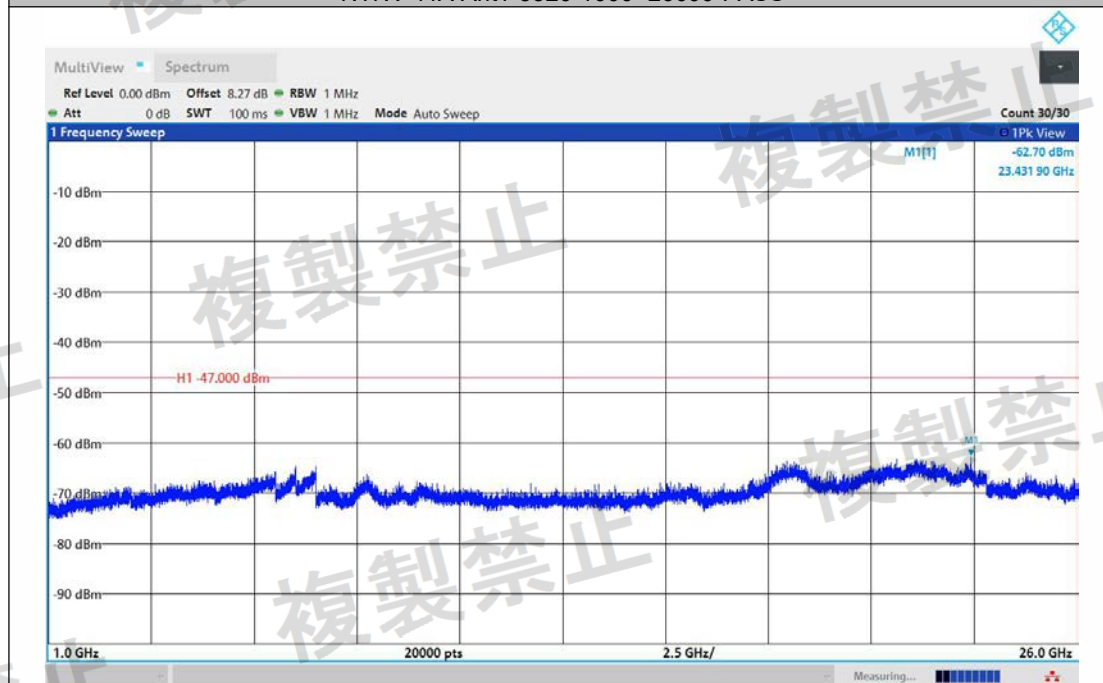


NTNV-11A-Ant2-5320-1000~26000-PASS

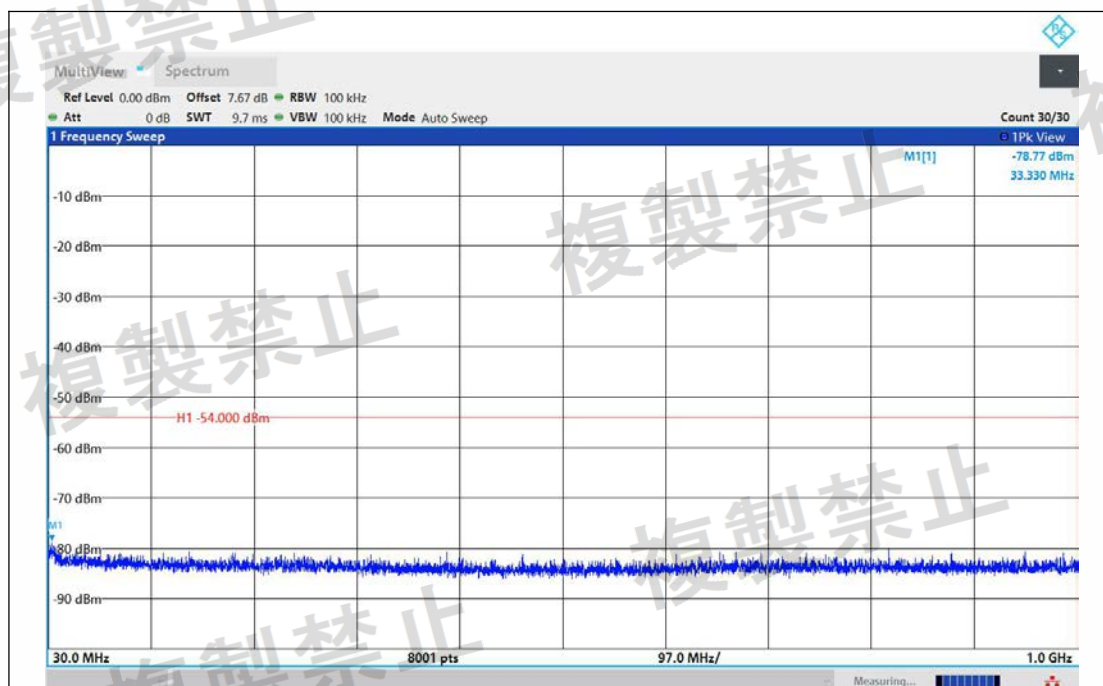


NTNV-11A-Ant1-5500-30~1000-PASS

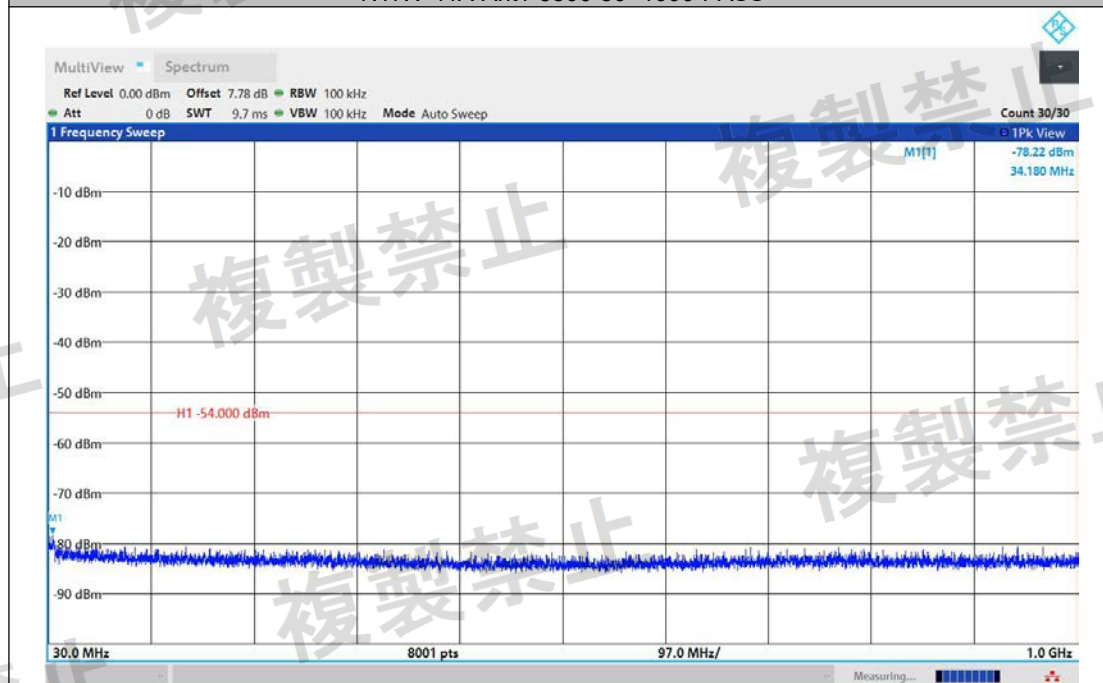


NTNV-11A-Ant2-5500-30~1000-PASS

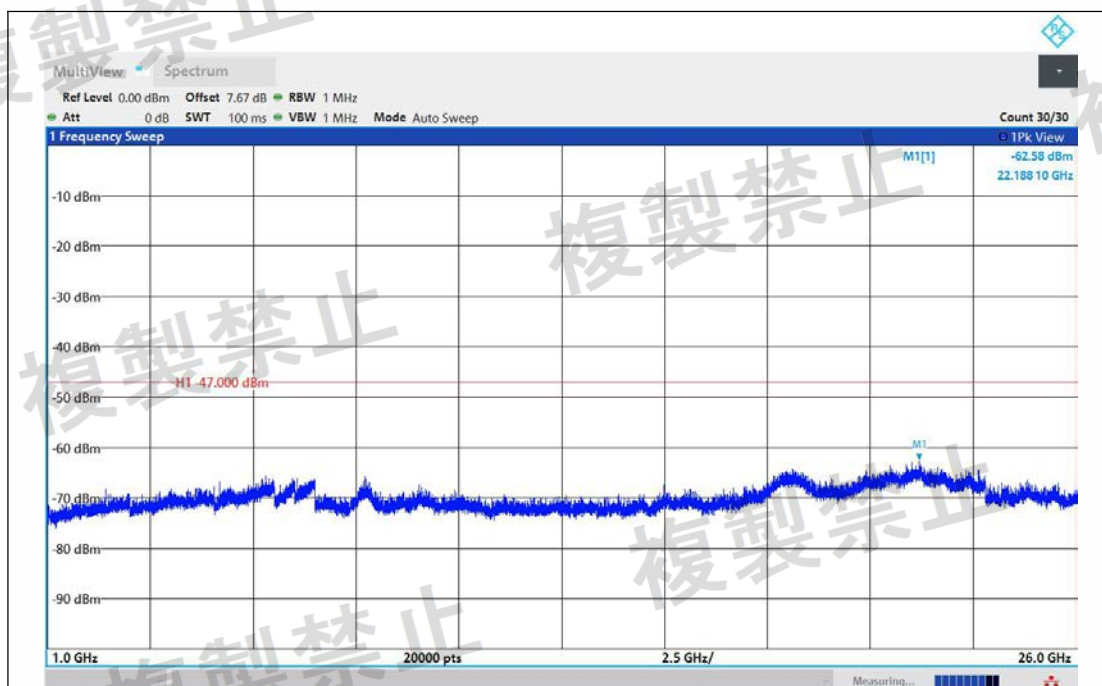


NTNV-11A-Ant1-5500-1000~26000-PASS

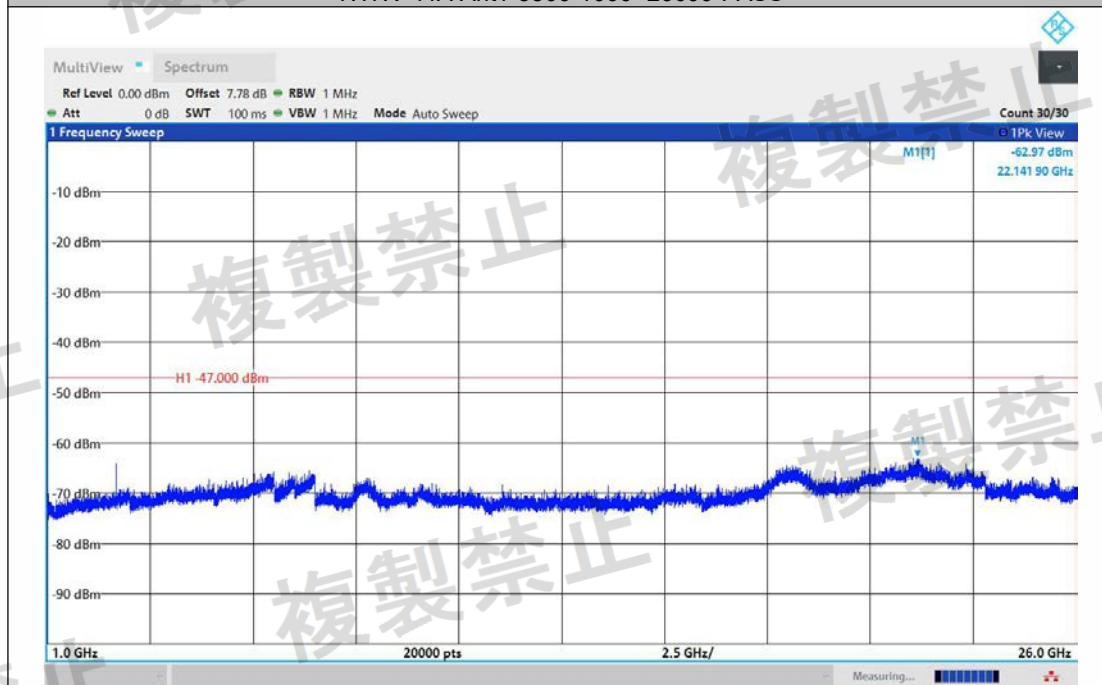


NTNV-11A-Ant2-5500-1000~26000-PASS

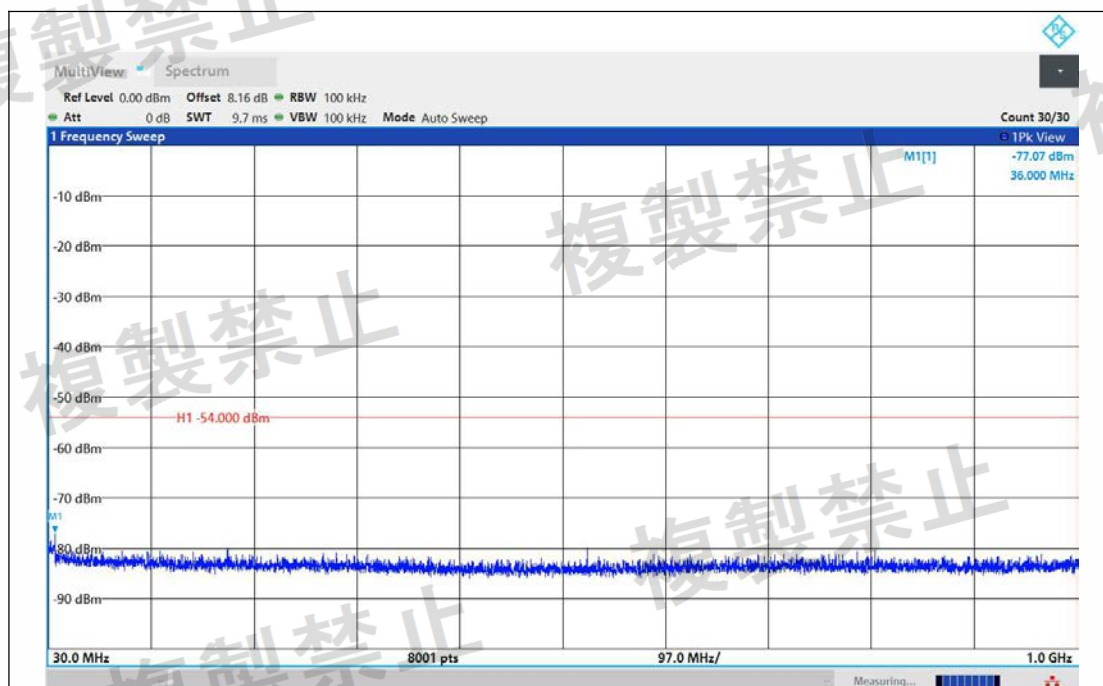


NTNV-11A-Ant1-5580-30~1000-PASS

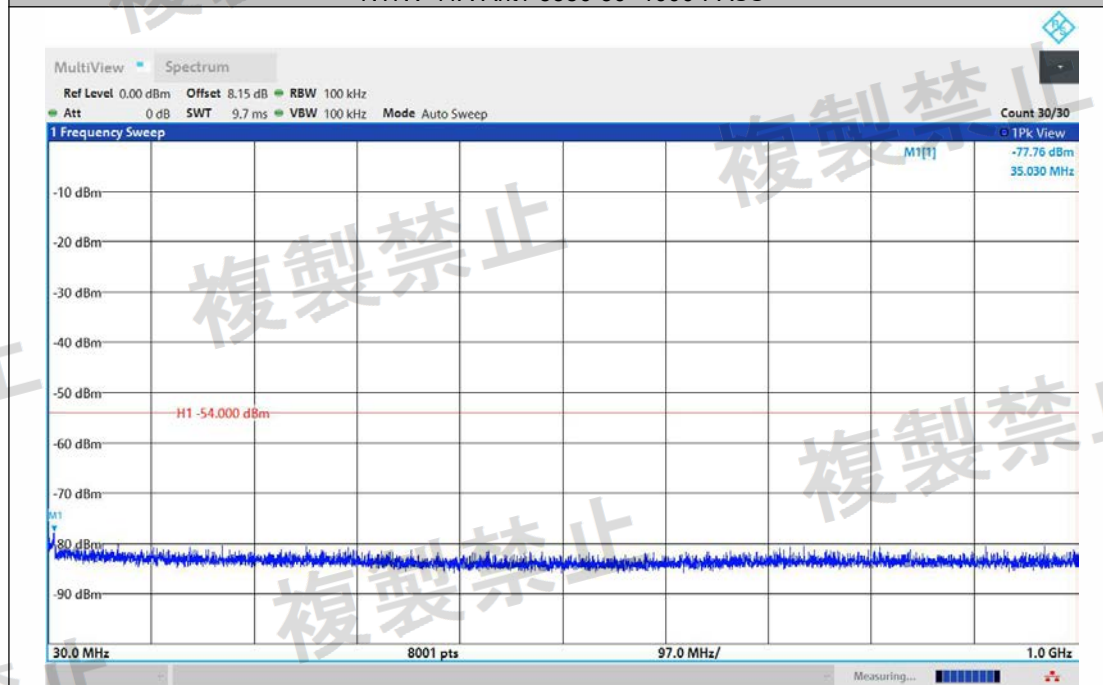


NTNV-11A-Ant2-5580-30~1000-PASS

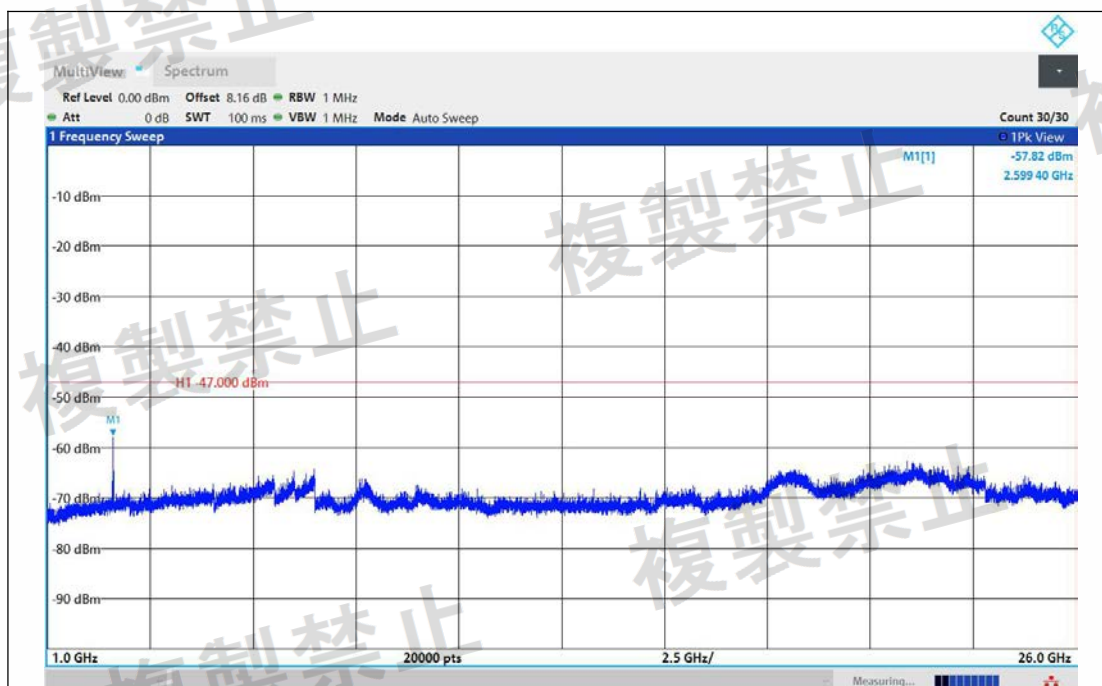


NTNV-11A-Ant1-5580-1000~26000-PASS

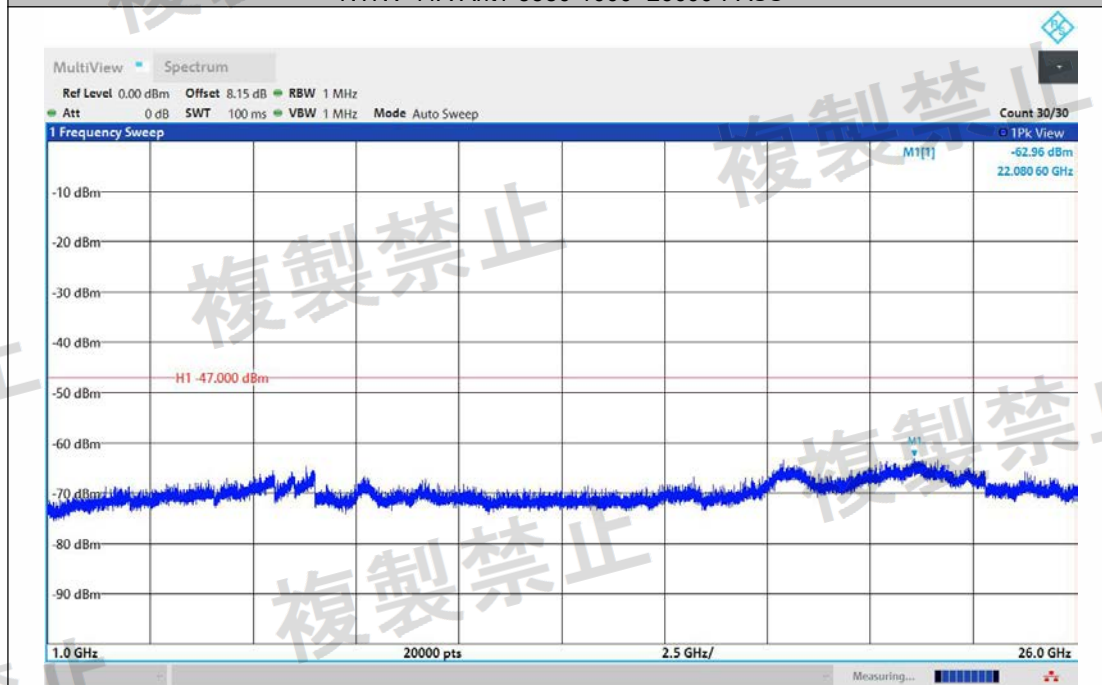


NTNV-11A-Ant2-5580-1000~26000-PASS

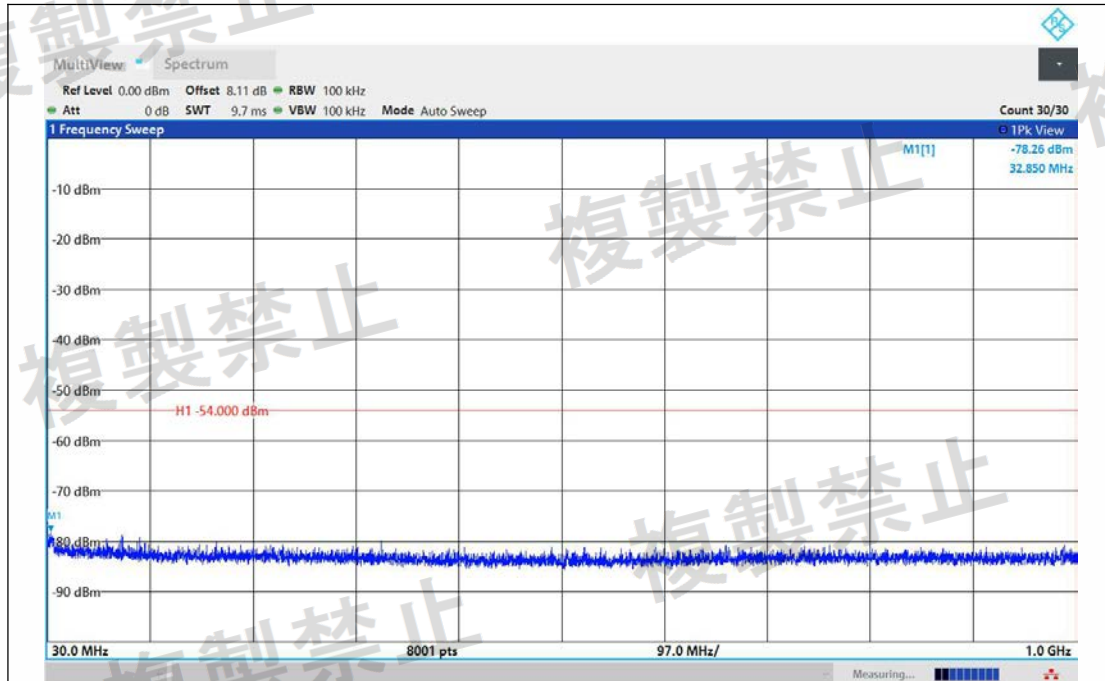


NTNV-11A-Ant1-5700-30~1000-PASS

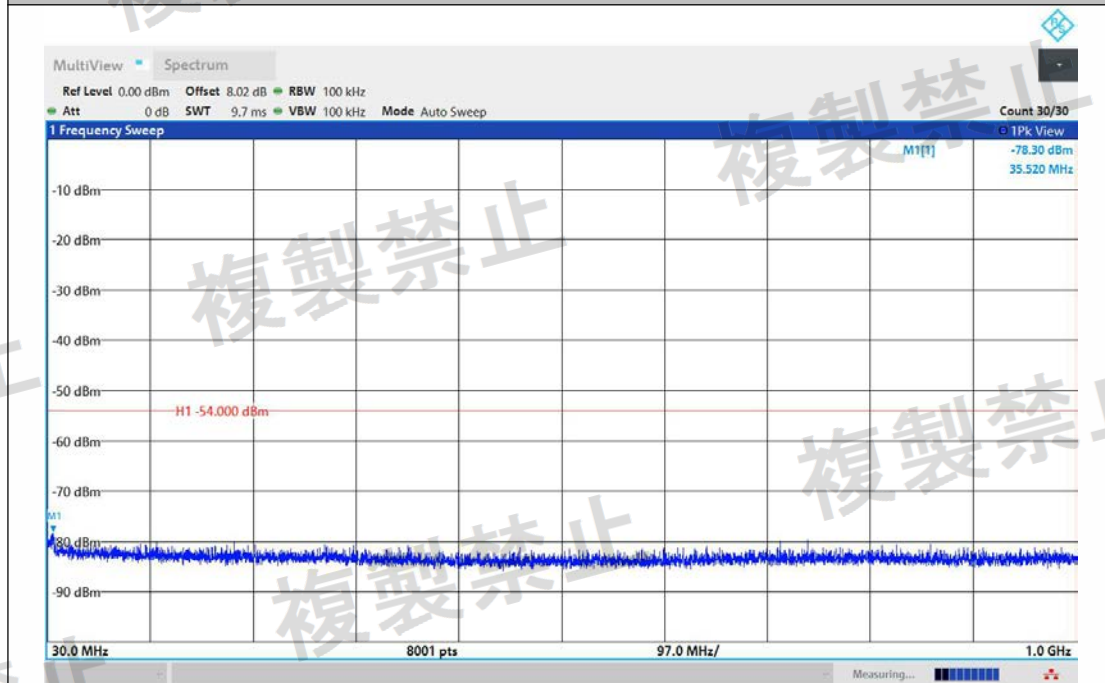


NTNV-11A-Ant2-5700-30~1000-PASS

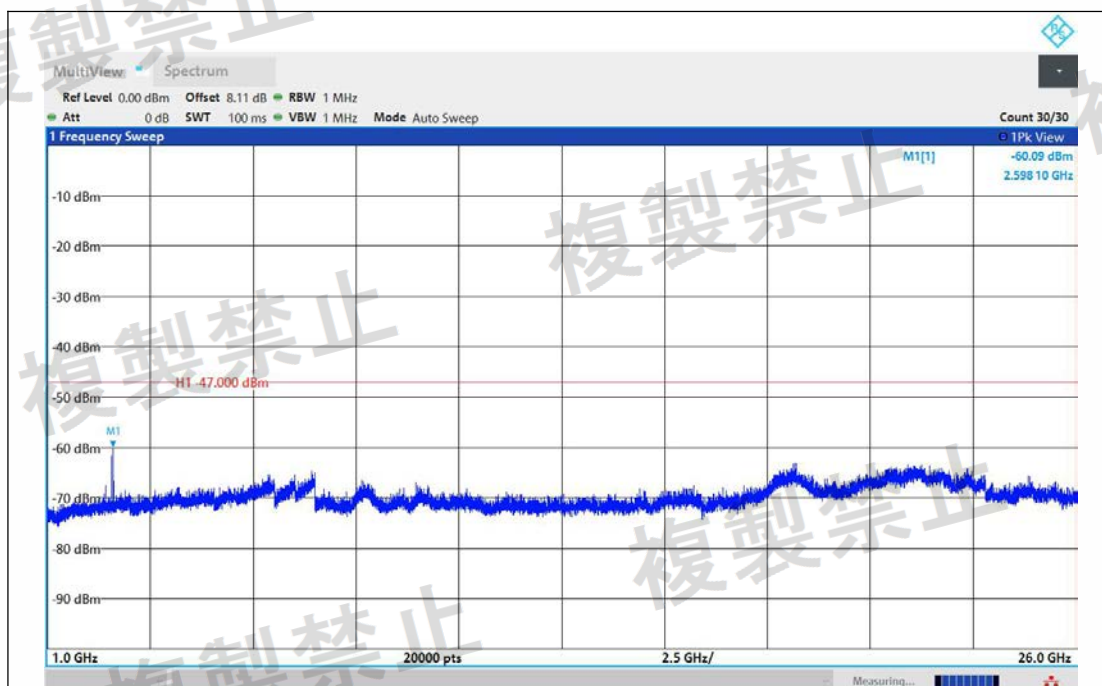


NTNV-11A-Ant1-5700-1000~26000-PASS

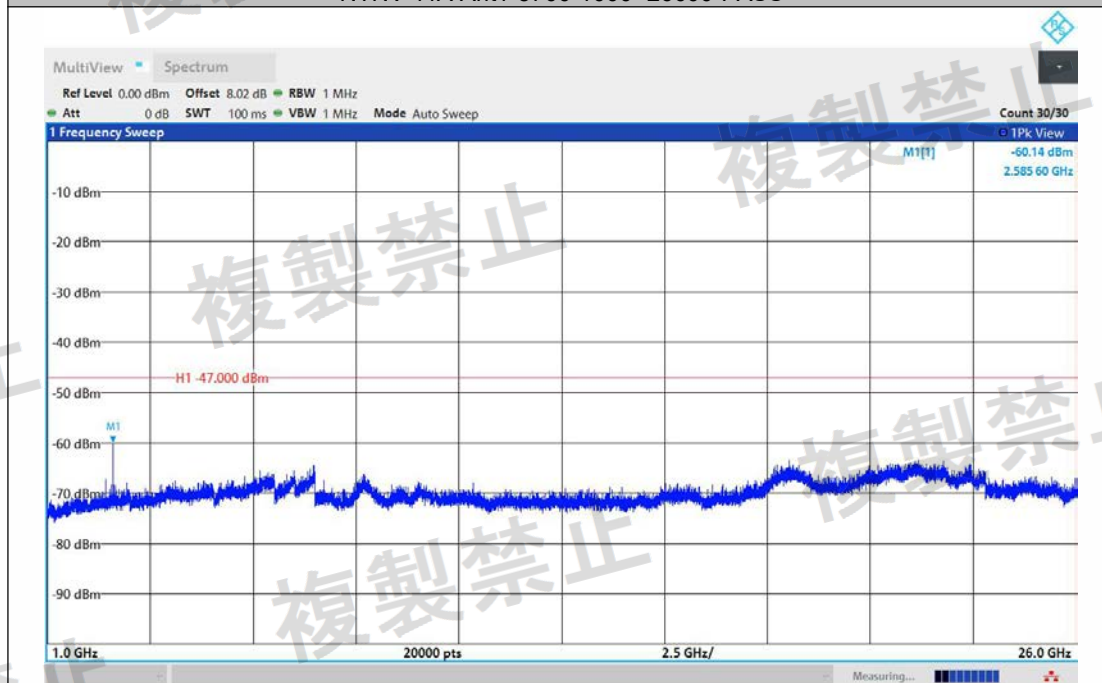


NTNV-11A-Ant2-5700-1000~26000-PASS

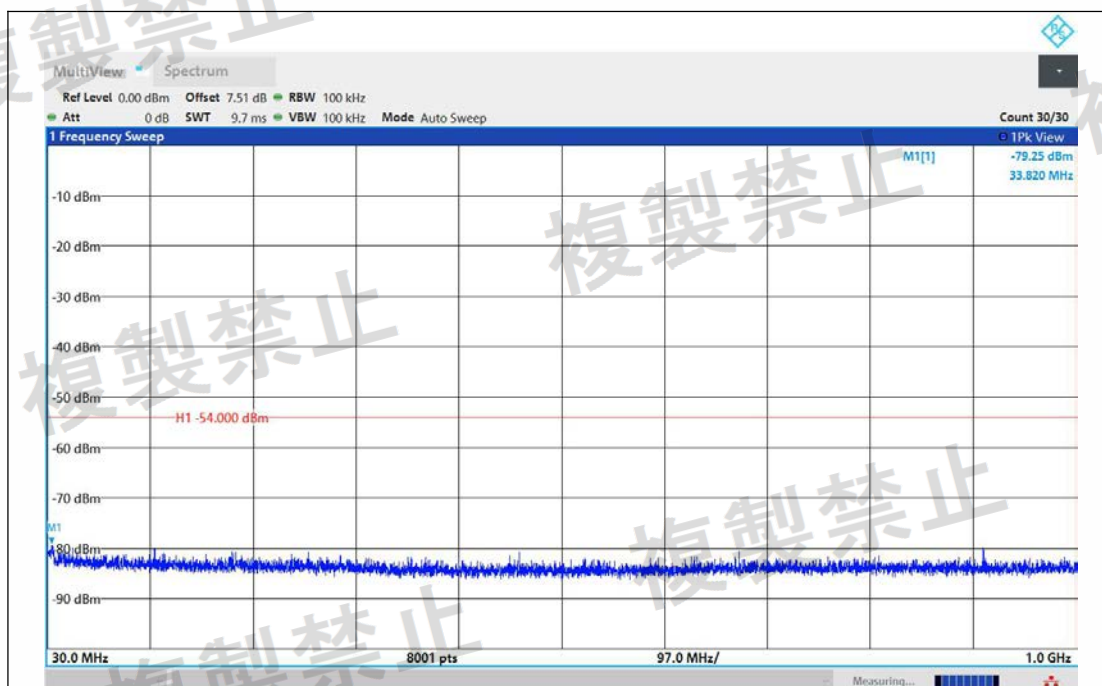


NTNV-11N20MIMO-Ant1-5180-30~1000-PASS

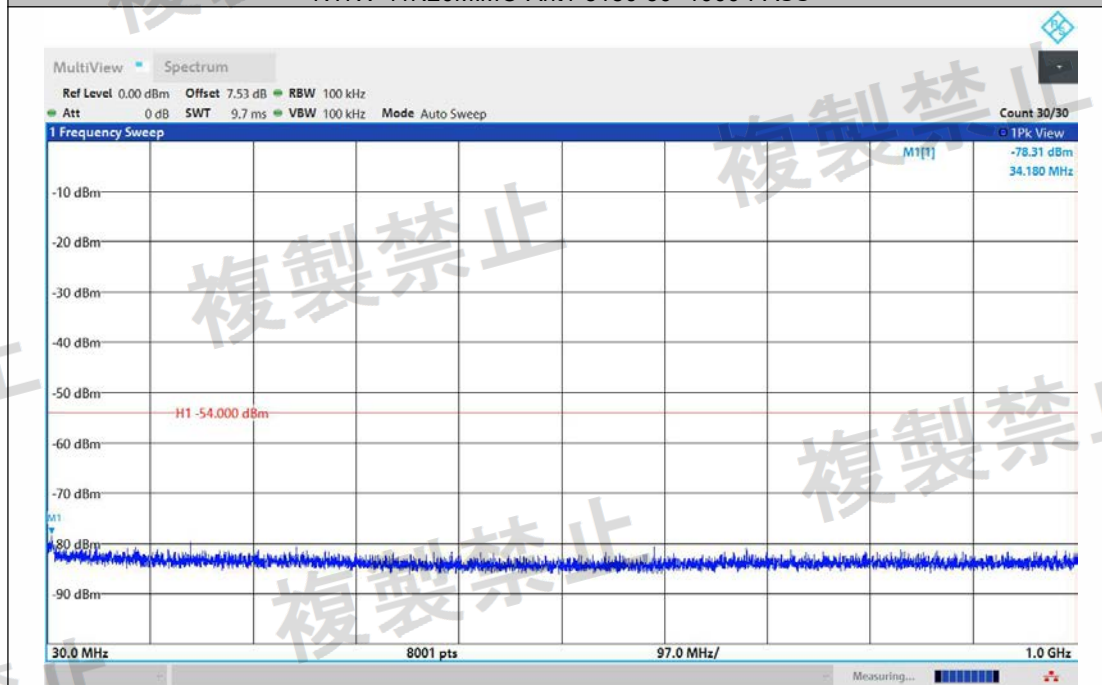


NTNV-11N20MIMO-Ant2-5180-30~1000-PASS

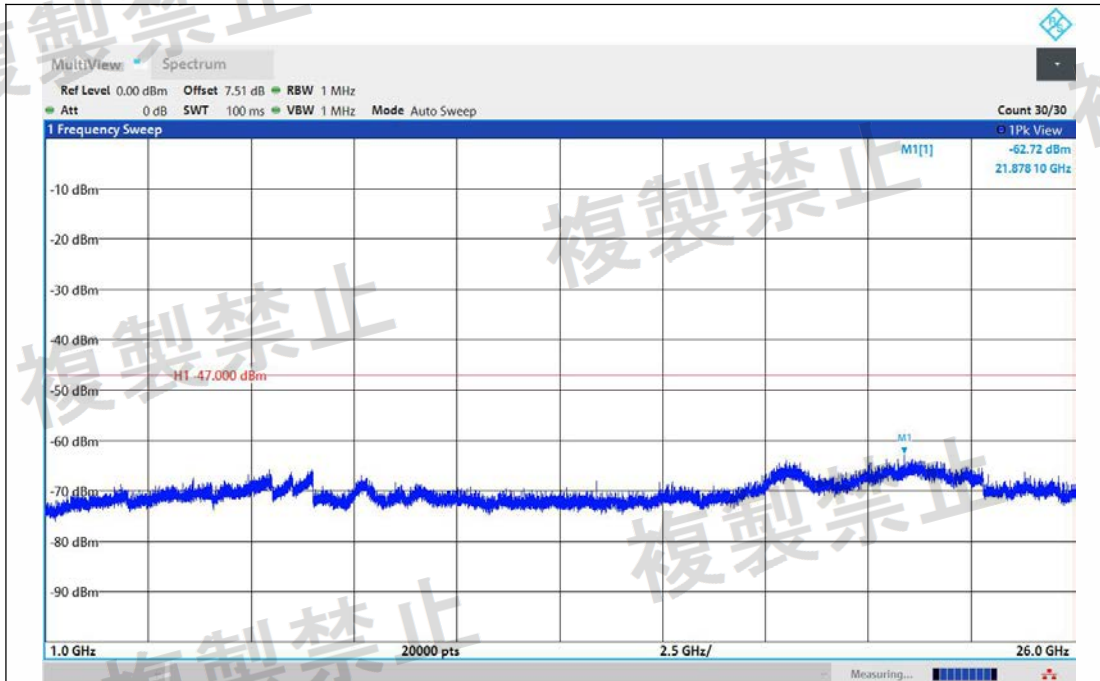


NTNV-11N20MIMO-Ant1-5180-1000~26000-PASS

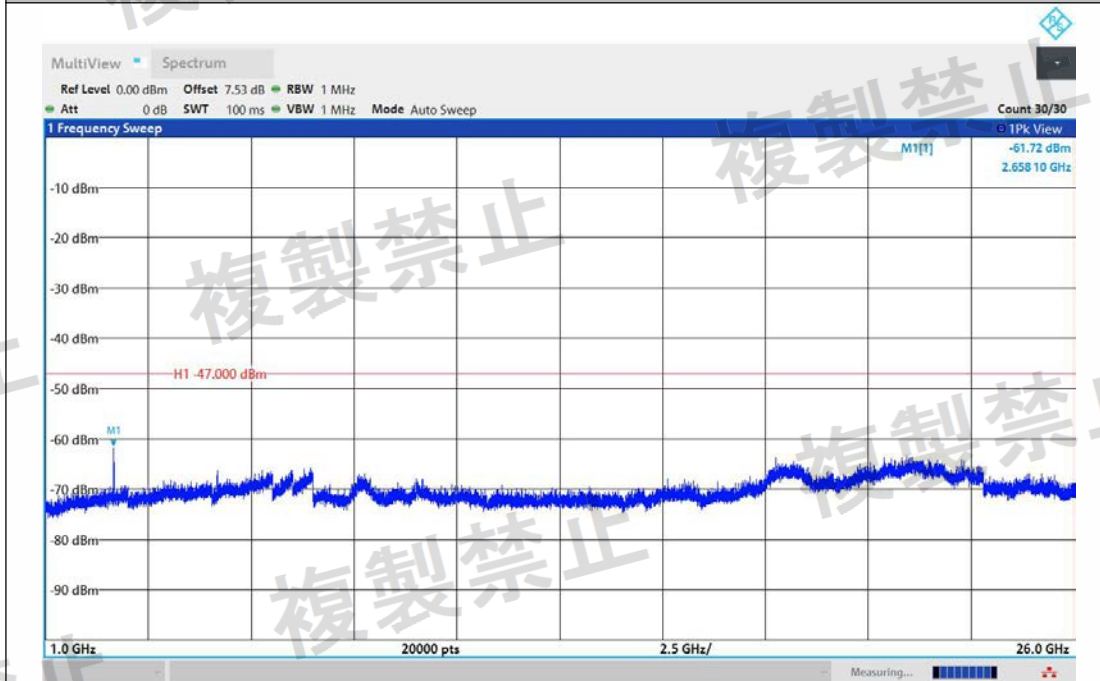


NTNV-11N20MIMO-Ant2-5180-1000~26000-PASS

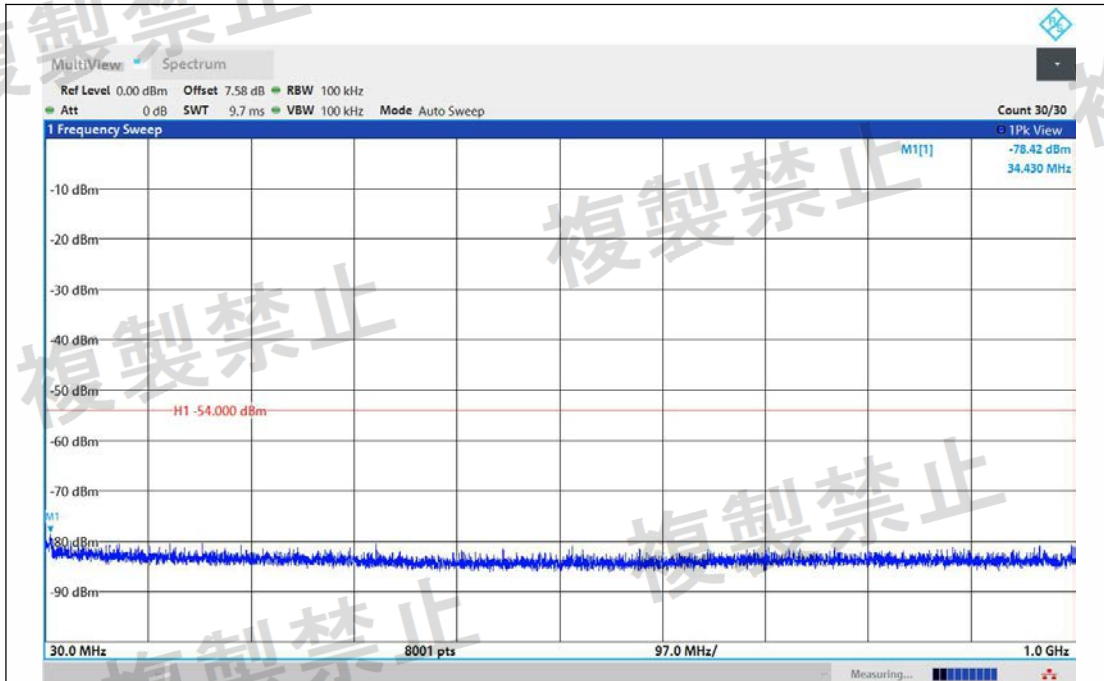


NTNV-11N20MIMO-Ant1-5200-30~1000-PASS

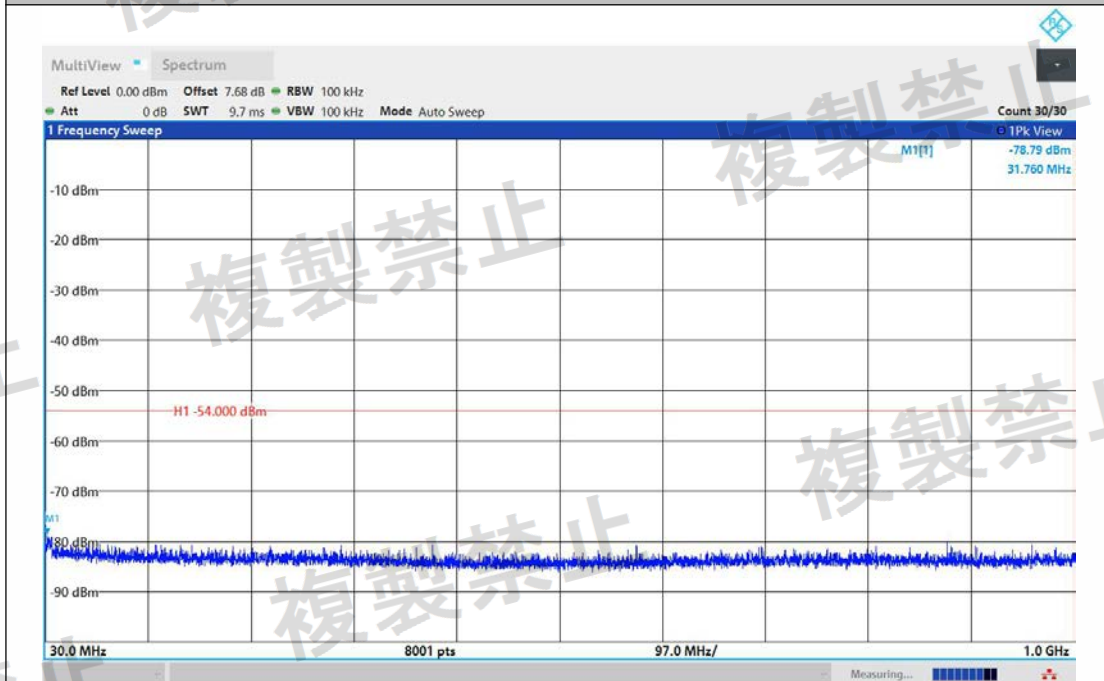


NTNV-11N20MIMO-Ant2-5200-30~1000-PASS

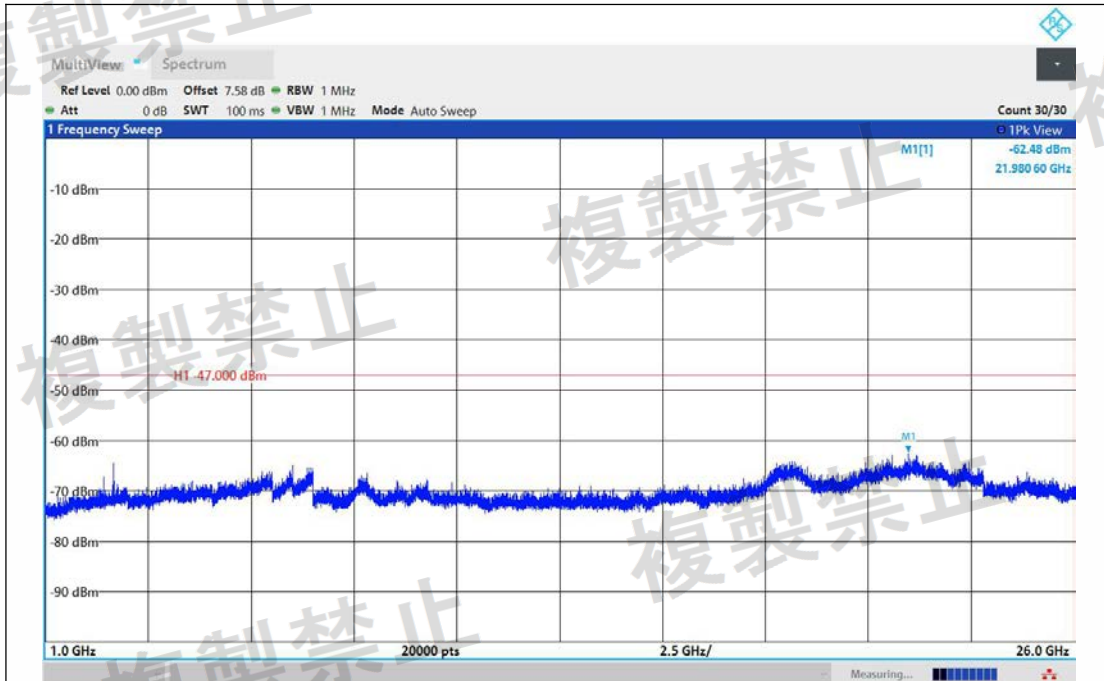


NTNV-11N20MIMO-Ant1-5200-1000~26000-PASS

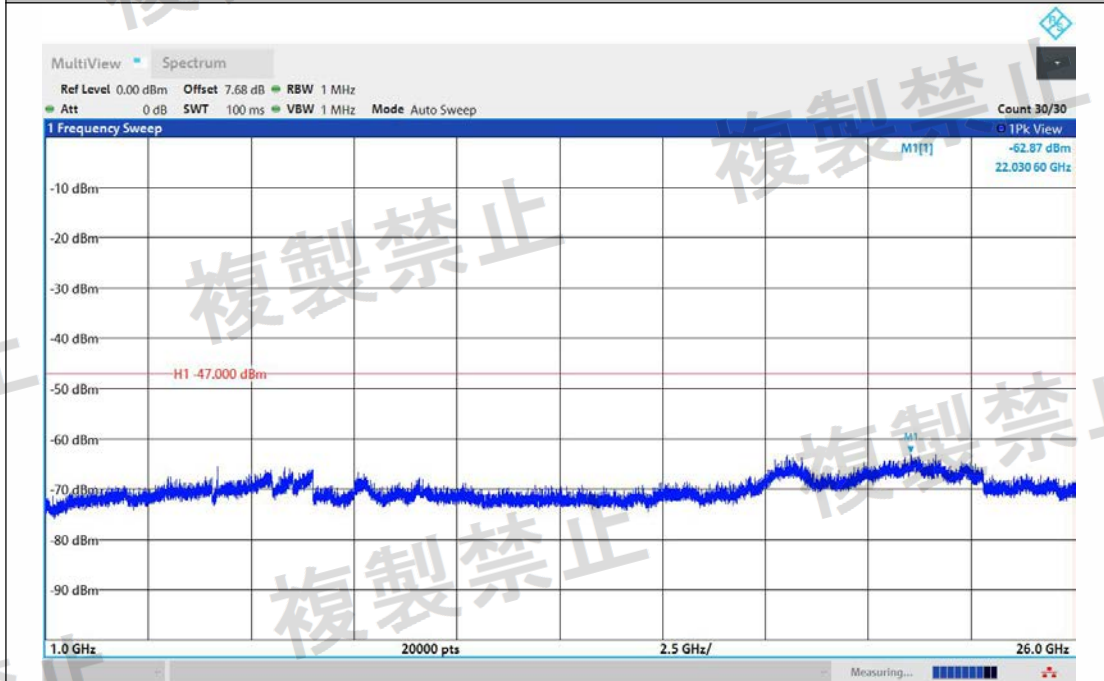


NTNV-11N20MIMO-Ant2-5200-1000~26000-PASS

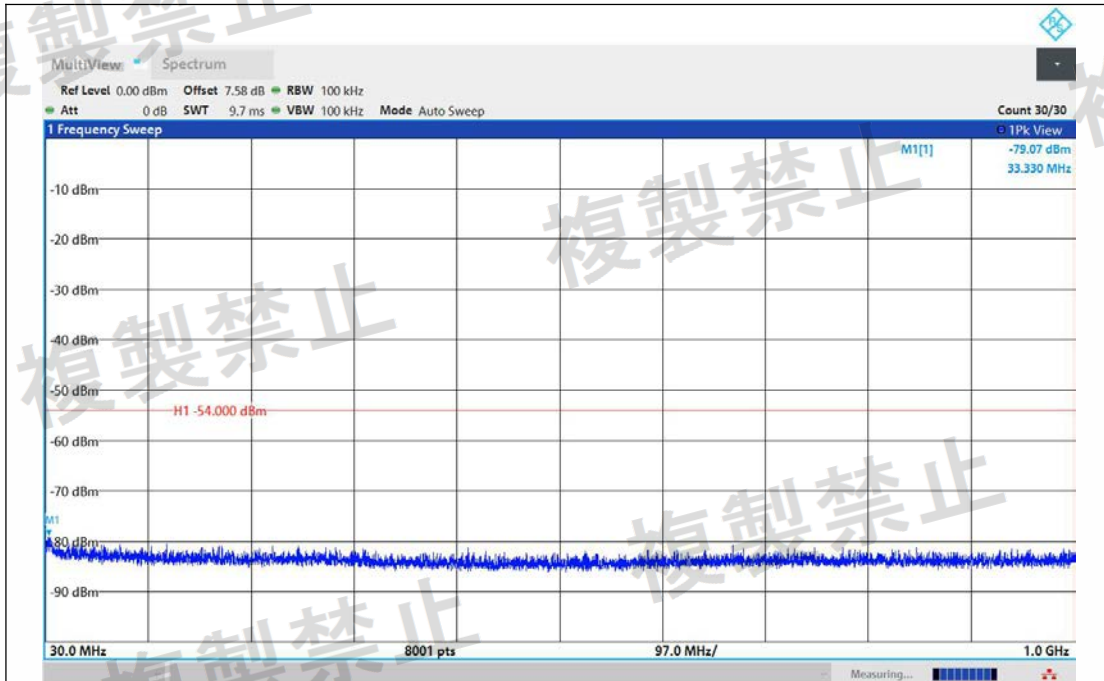


NTNV-11N20MIMO-Ant1-5240-30~1000-PASS

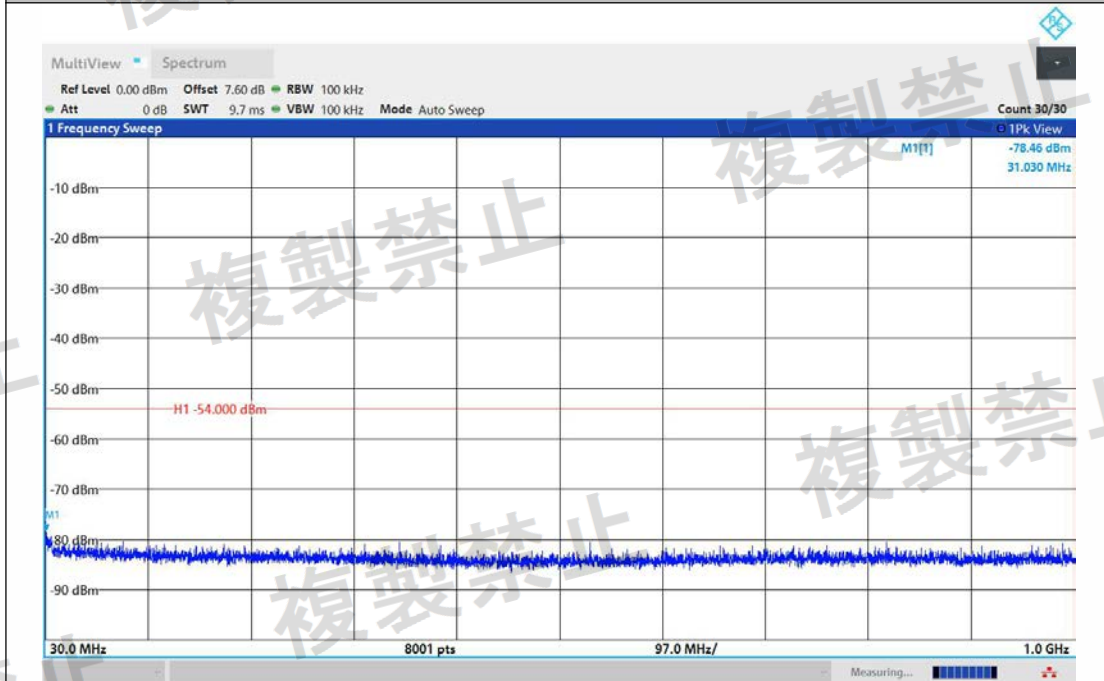


NTNV-11N20MIMO-Ant2-5240-30~1000-PASS

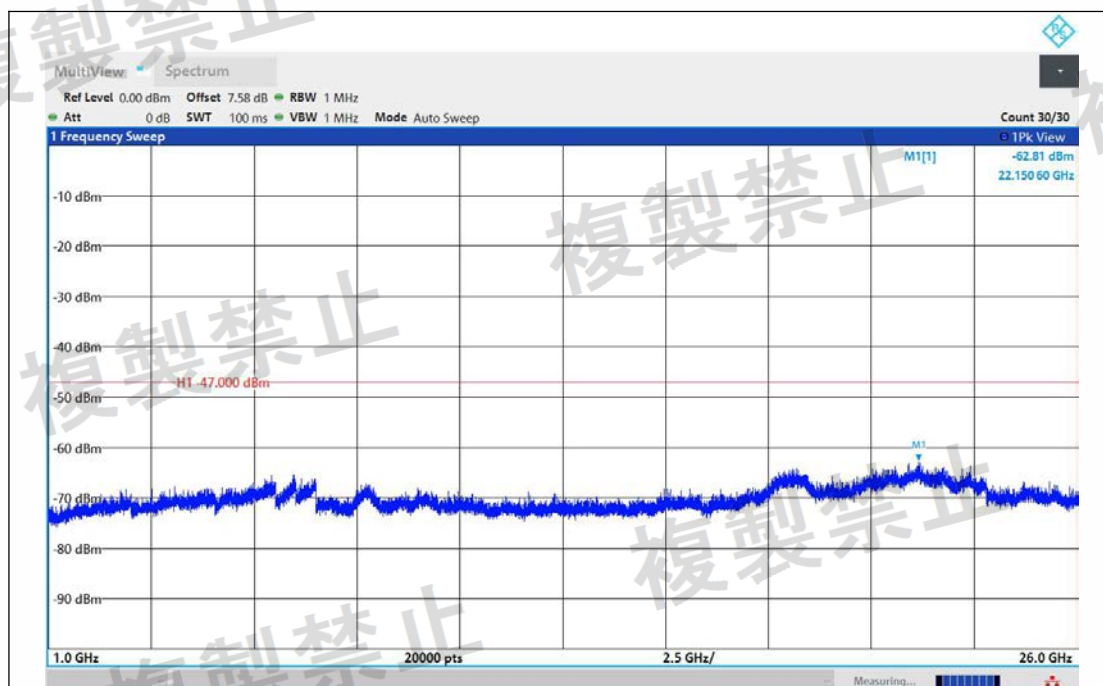


NTNV-11N20MIMO-Ant1-5240-1000~26000-PASS

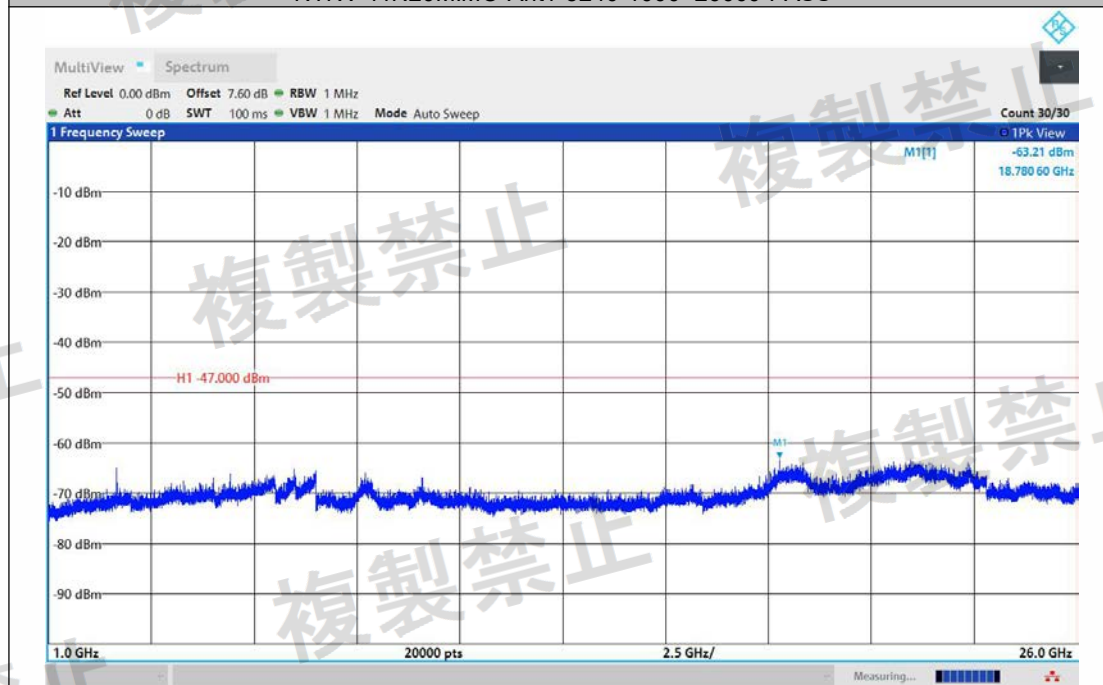


NTNV-11N20MIMO-Ant2-5240-1000~26000-PASS

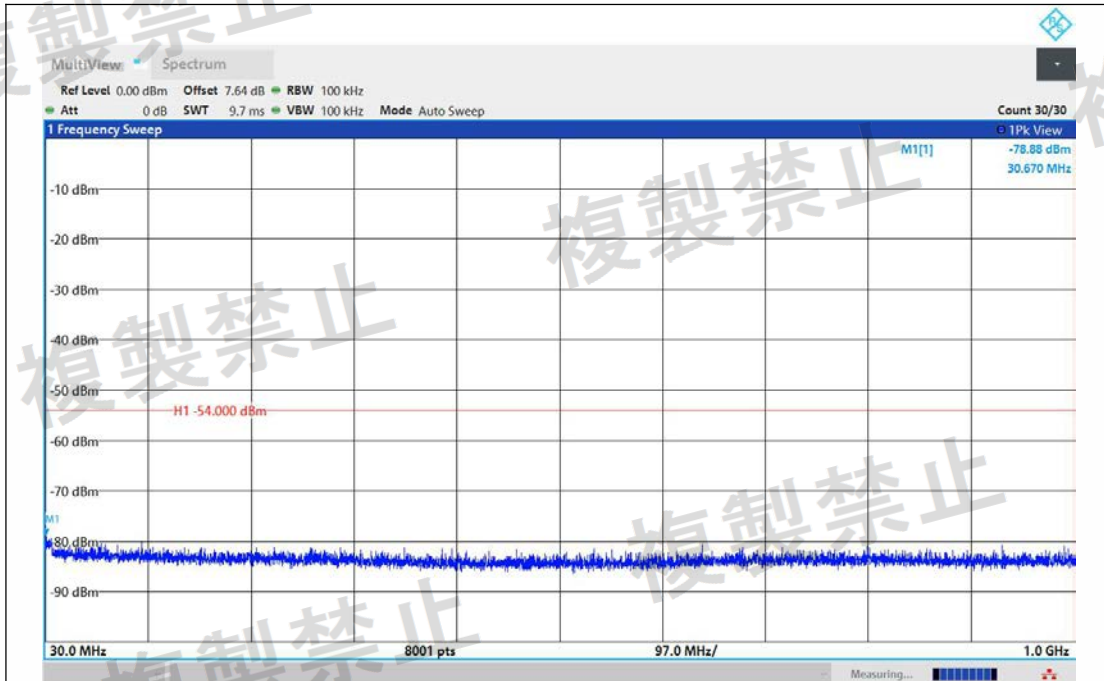


NTNV-11N20MIMO-Ant1-5260-30~1000-PASS

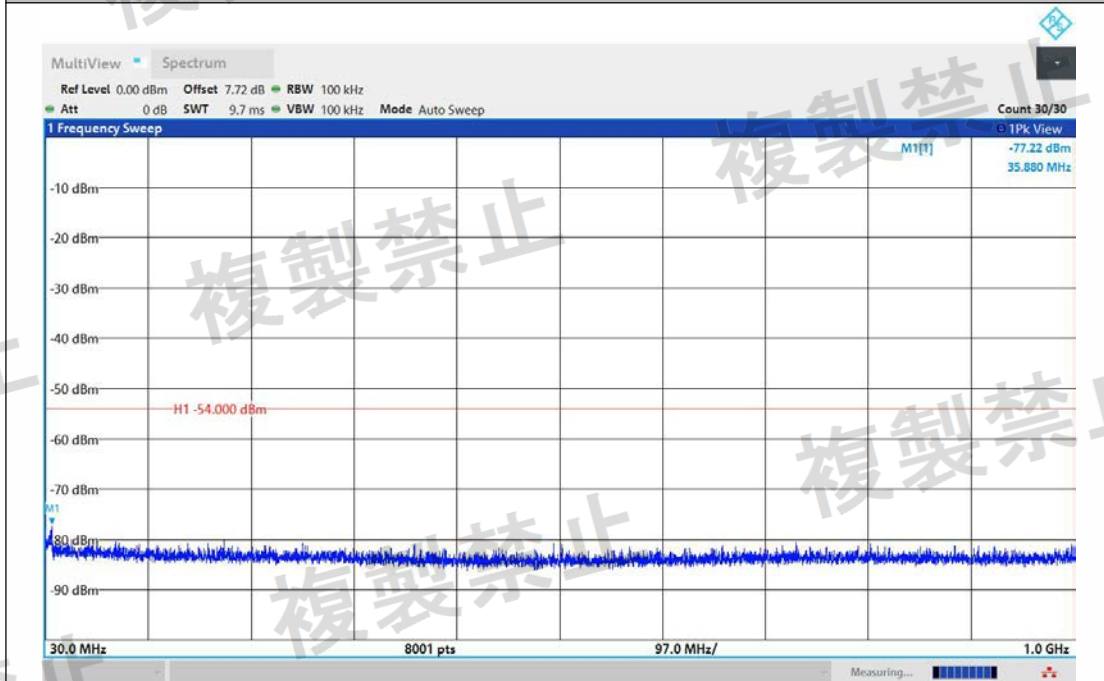


NTNV-11N20MIMO-Ant2-5260-30~1000-PASS

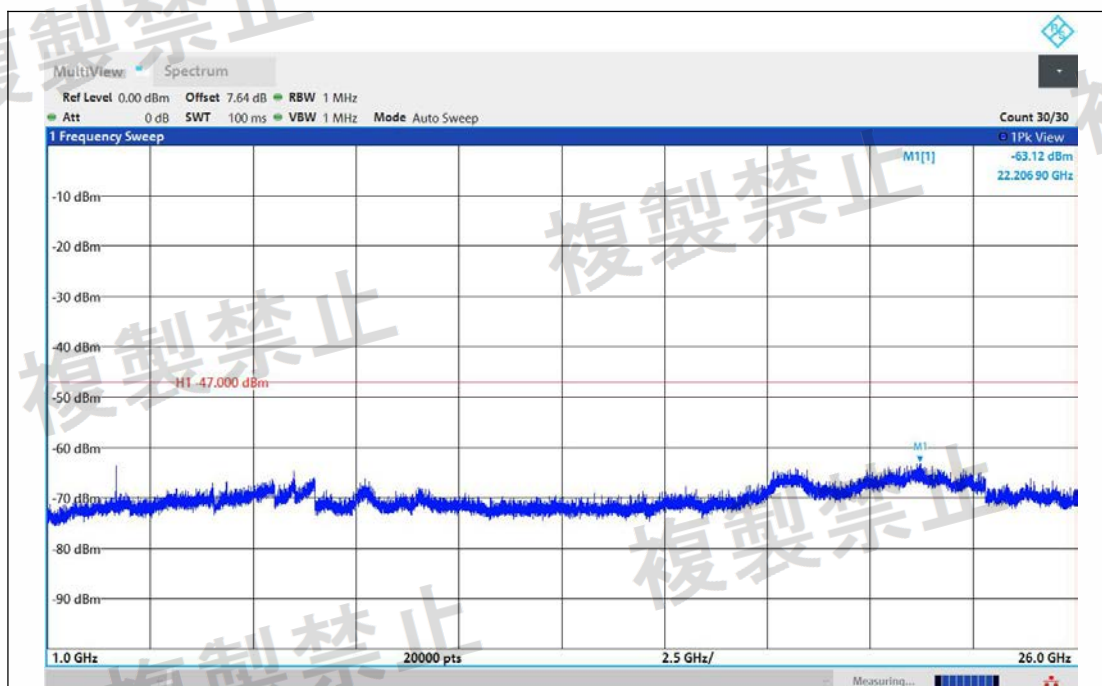


NTNV-11N20MIMO-Ant1-5260-1000~26000-PASS

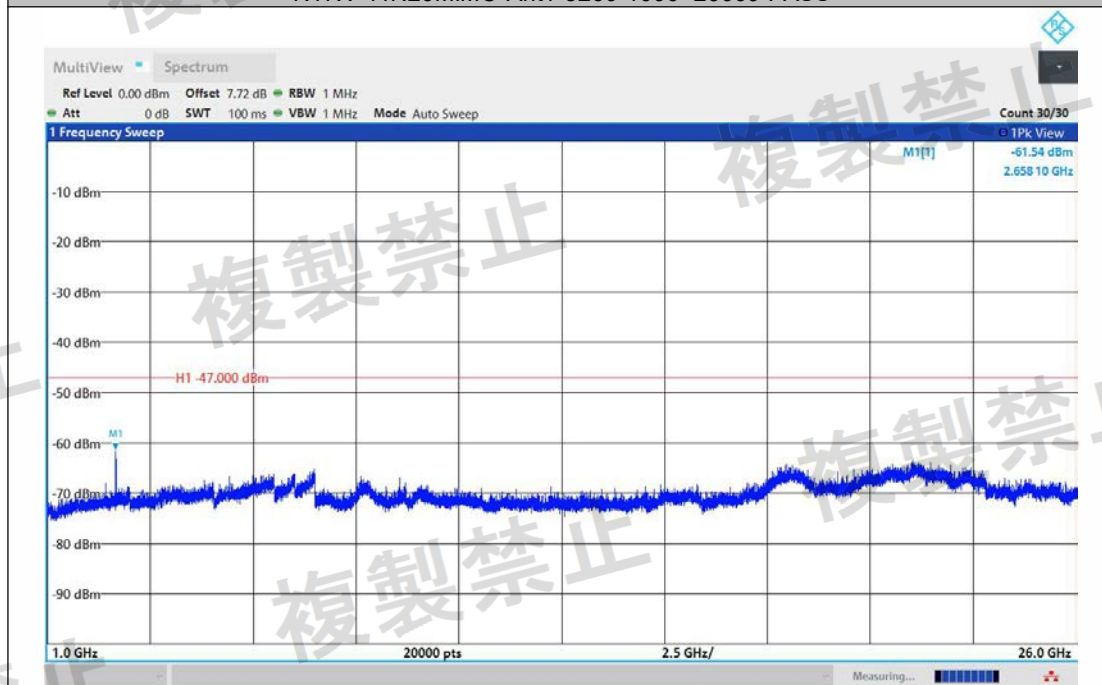


NTNV-11N20MIMO-Ant2-5260-1000~26000-PASS

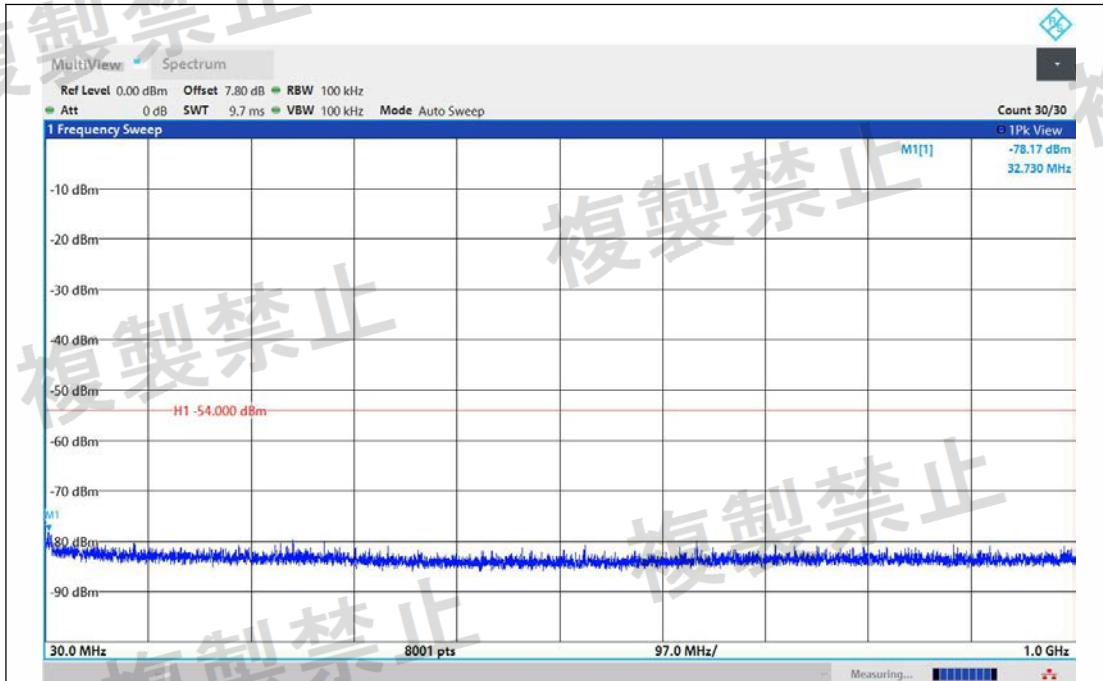


NTNV-11N20MIMO-Ant1-5280-30~1000-PASS

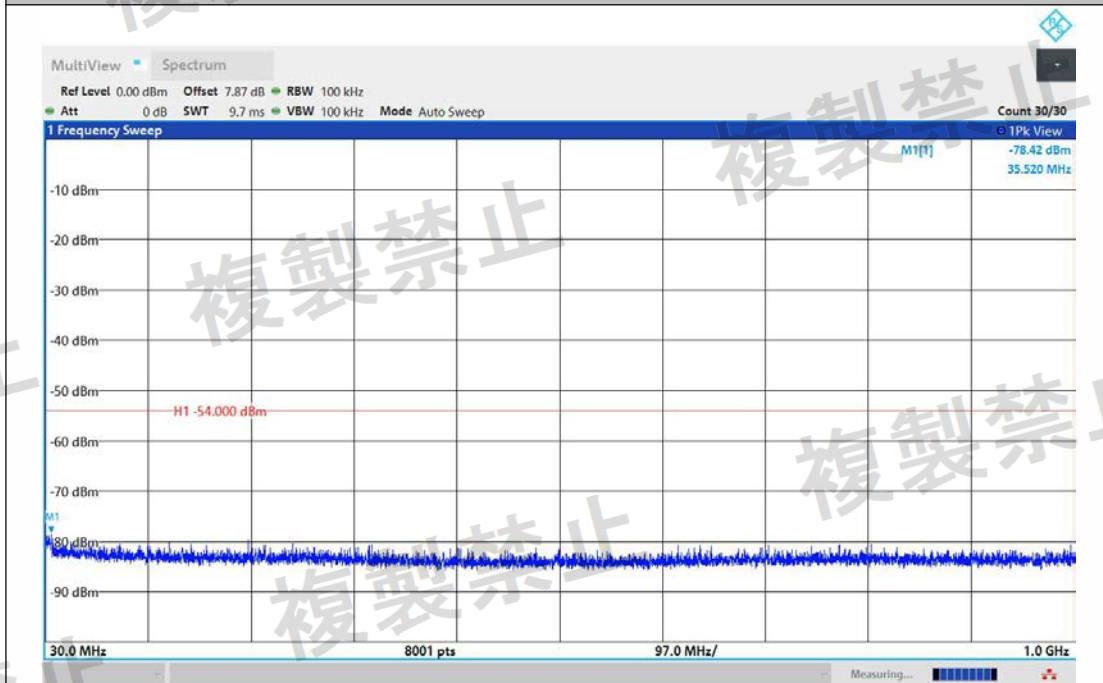


NTNV-11N20MIMO-Ant2-5280-30~1000-PASS

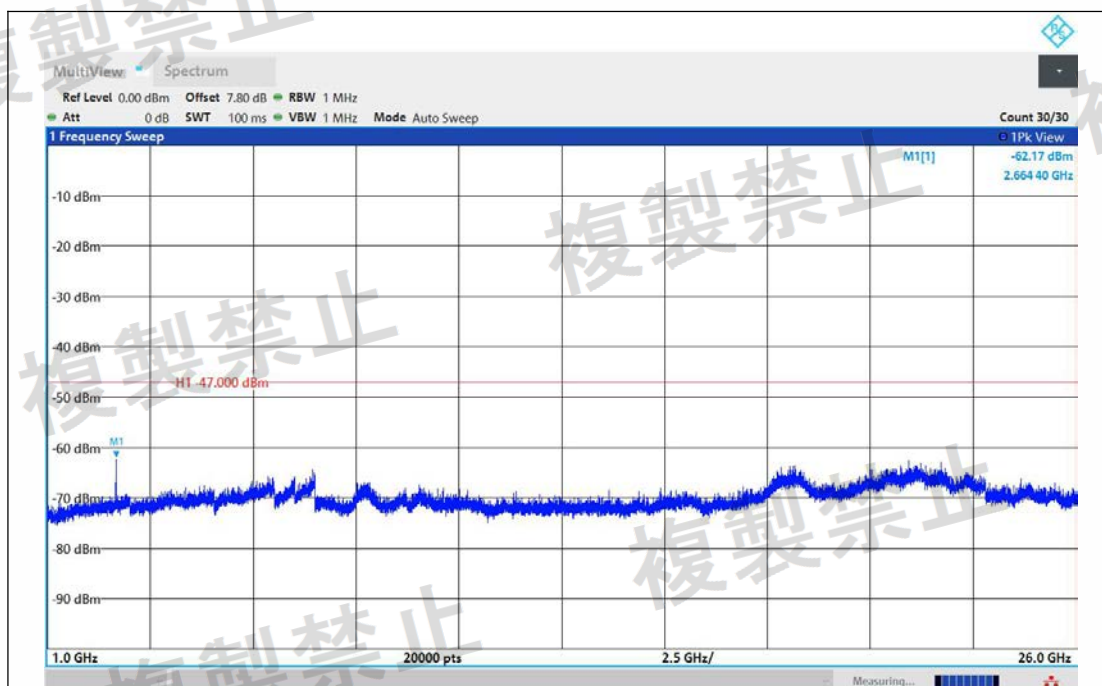


NTNV-11N20MIMO-Ant1-5280-1000~26000-PASS

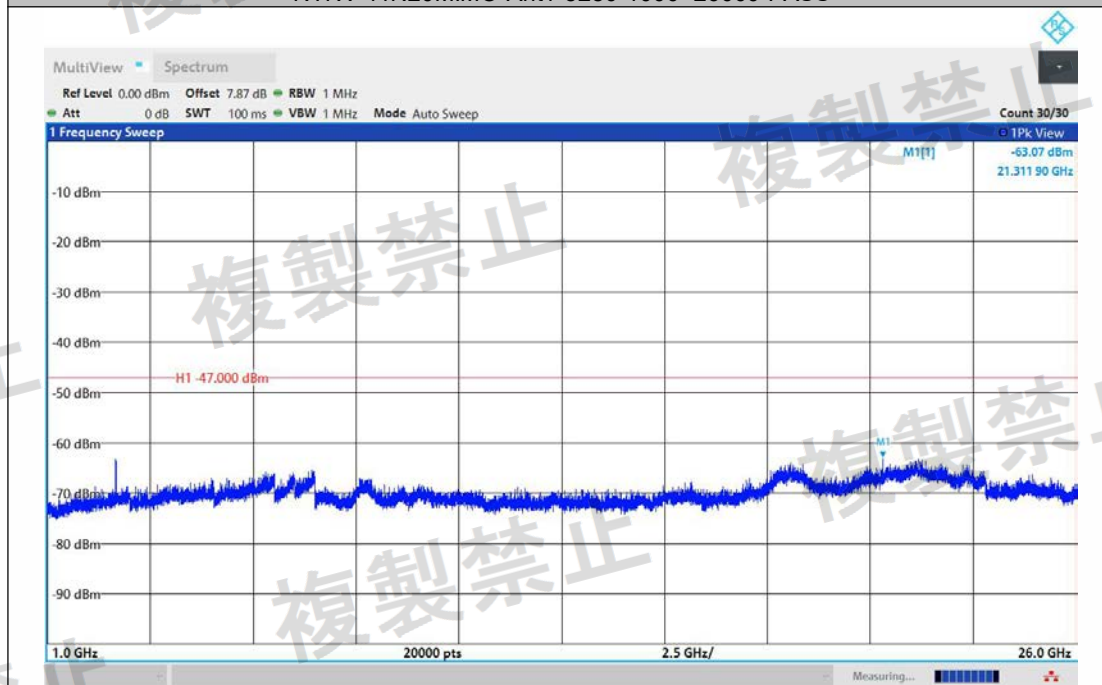


NTNV-11N20MIMO-Ant2-5280-1000~26000-PASS

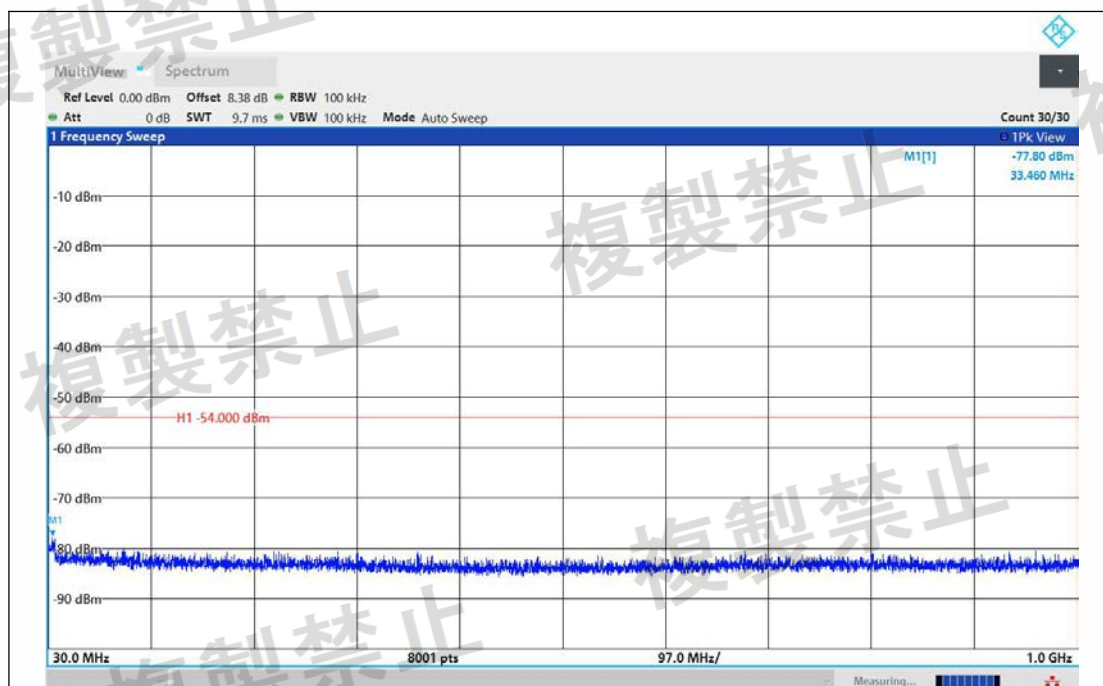


NTNV-11N20MIMO-Ant1-5320-30~1000-PASS

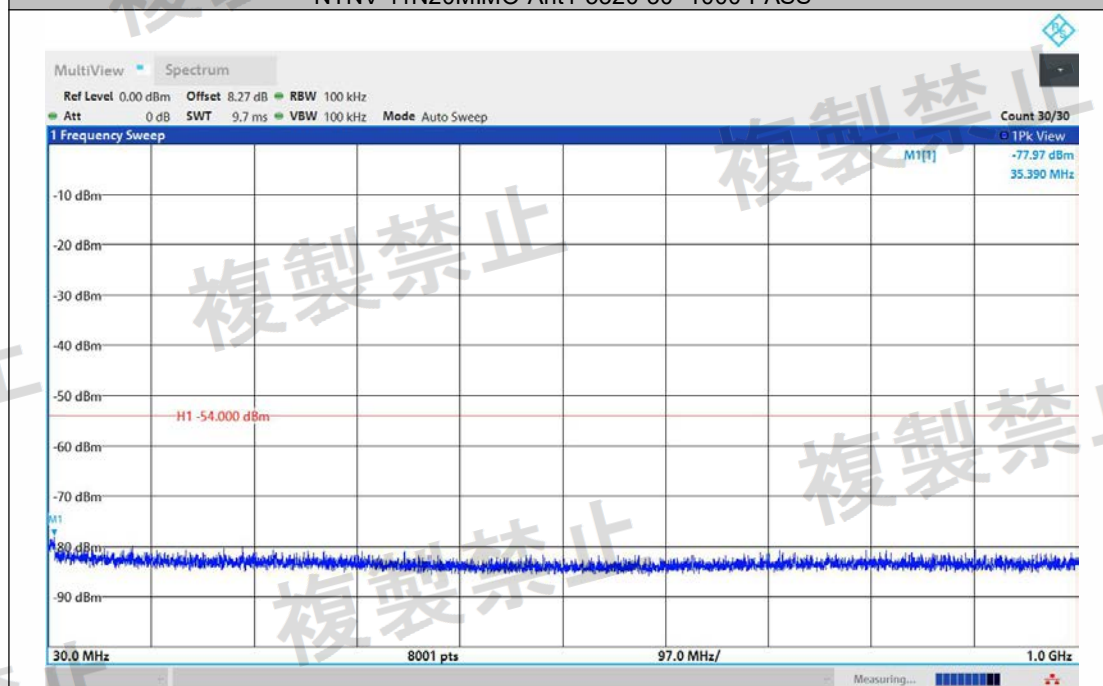


NTNV-11N20MIMO-Ant2-5320-30~1000-PASS

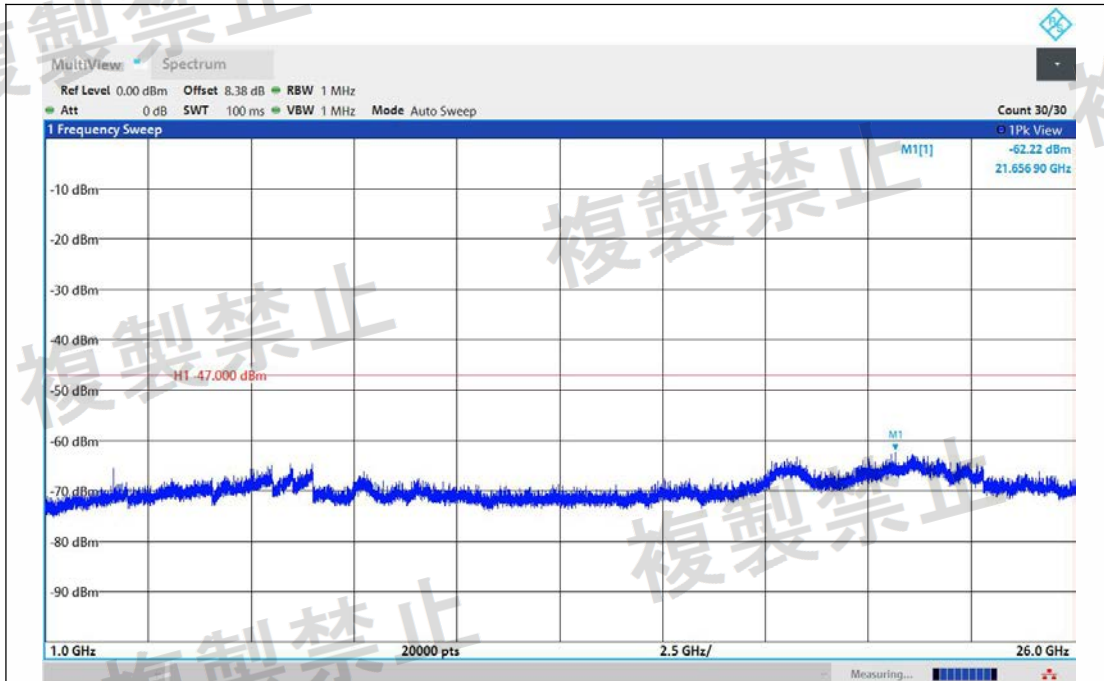


NTNV-11N20MIMO-Ant1-5320-1000~26000-PASS

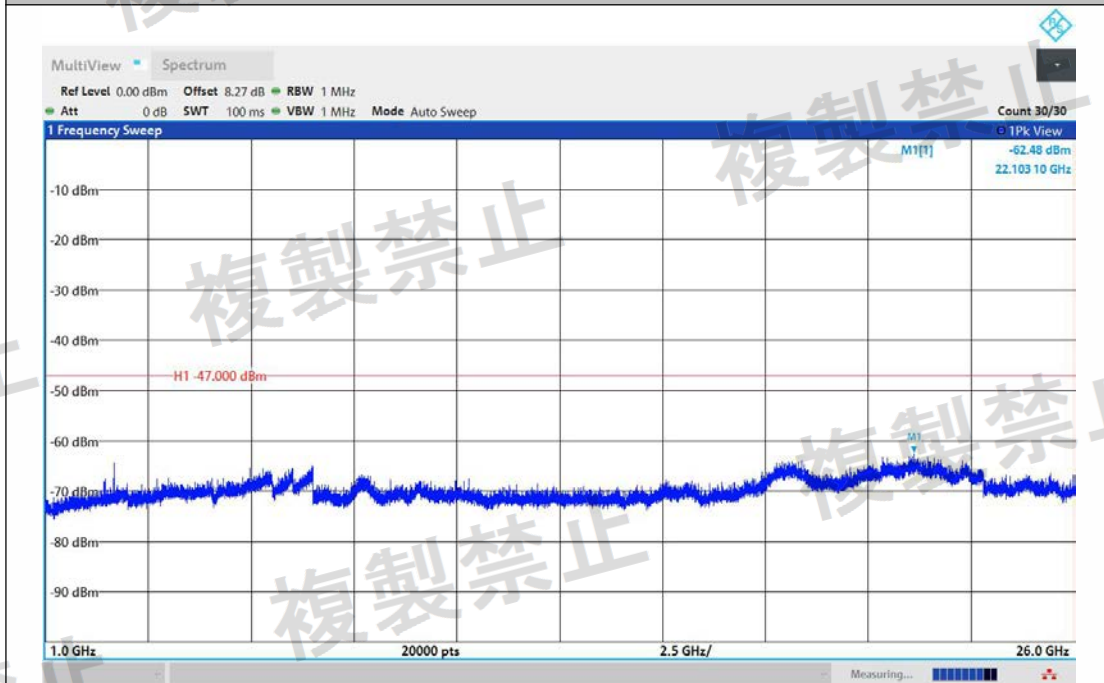


NTNV-11N20MIMO-Ant2-5320-1000~26000-PASS

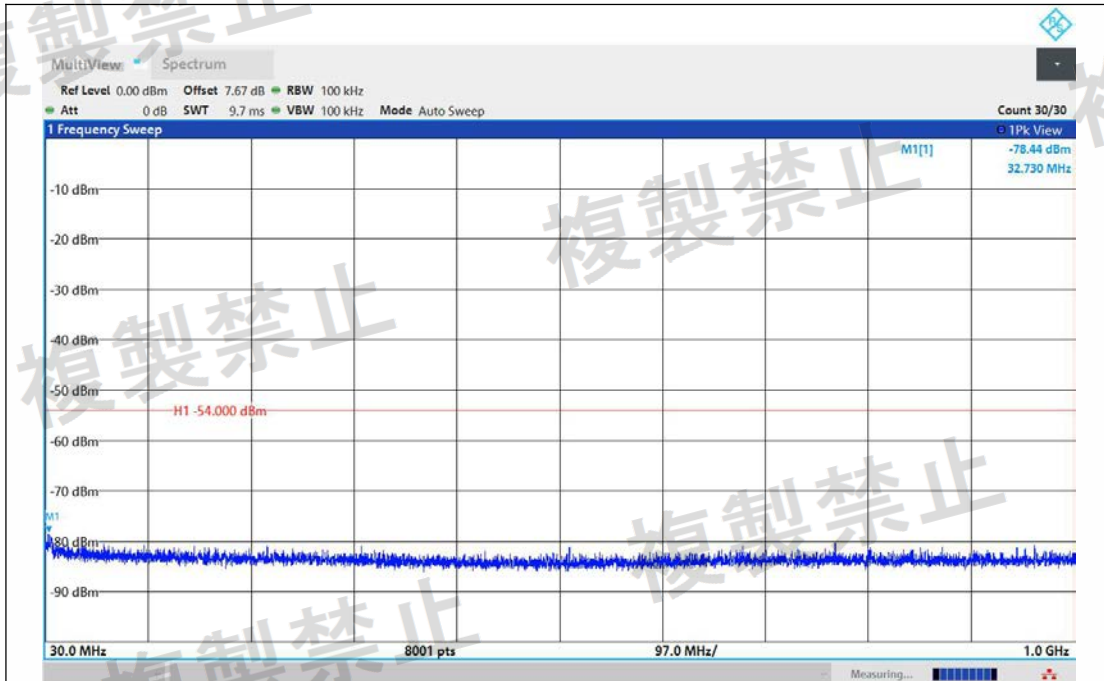


NTNV-11N20MIMO-Ant1-5500-30~1000-PASS

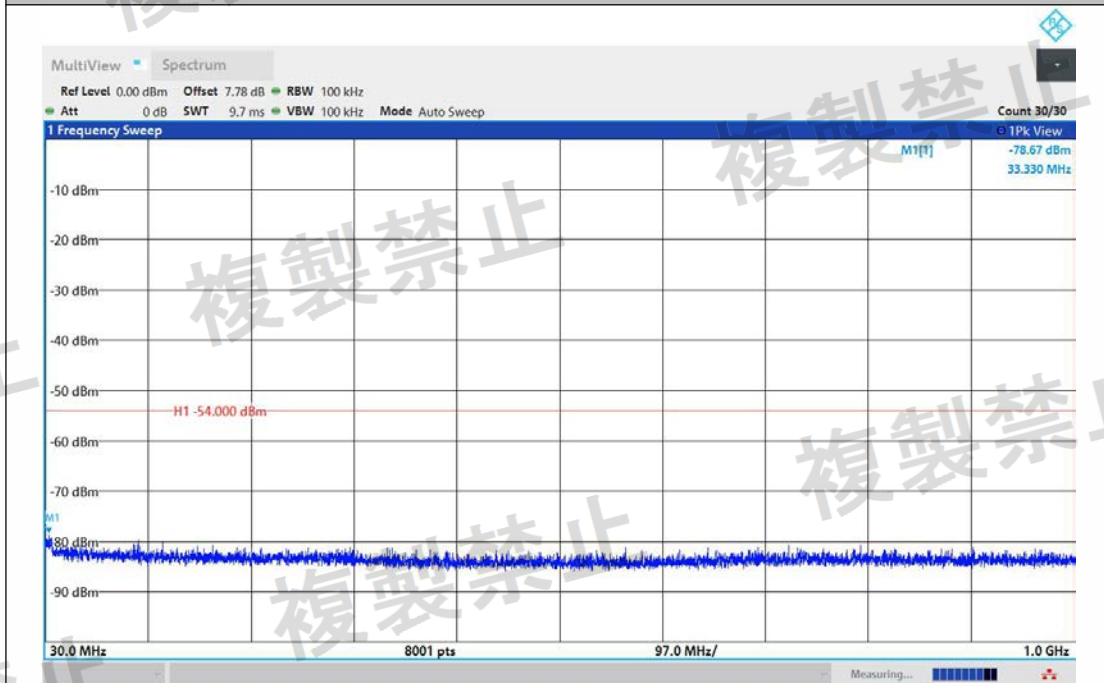


NTNV-11N20MIMO-Ant2-5500-30~1000-PASS

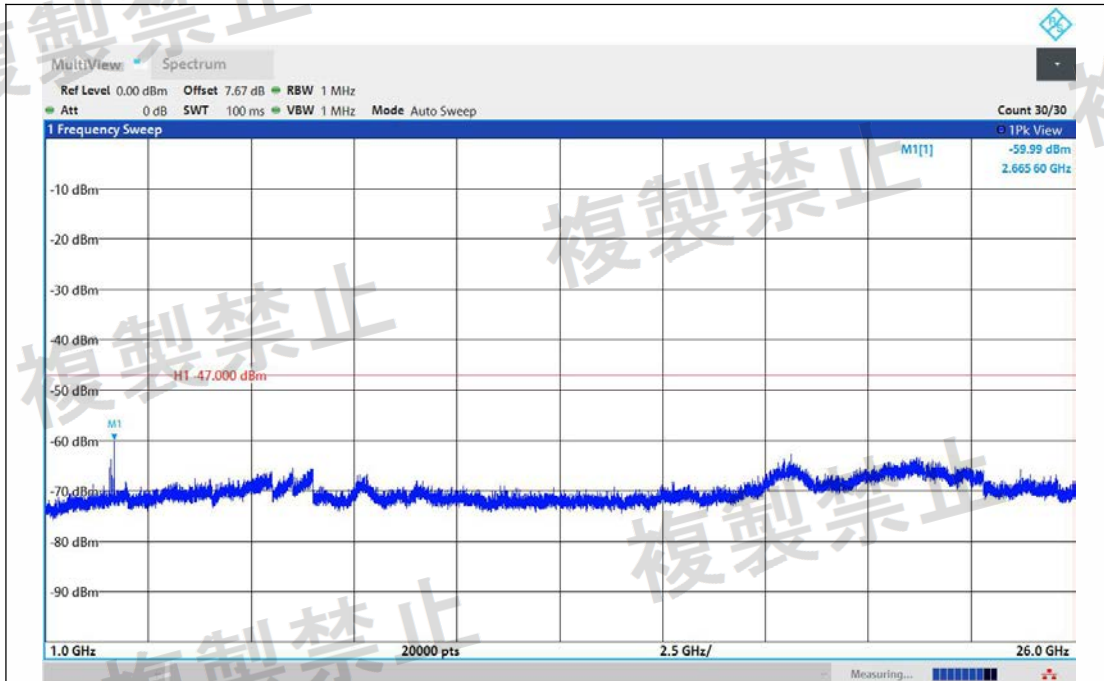


NTNV-11N20MIMO-Ant1-5500-1000~26000-PASS

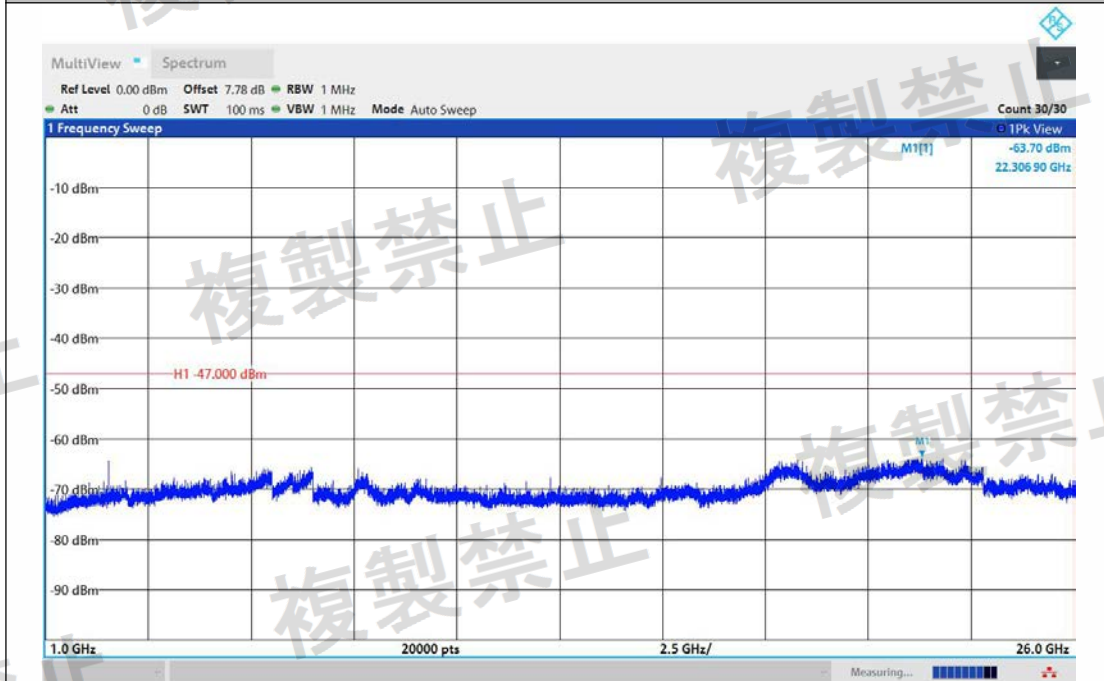


NTNV-11N20MIMO-Ant2-5500-1000~26000-PASS

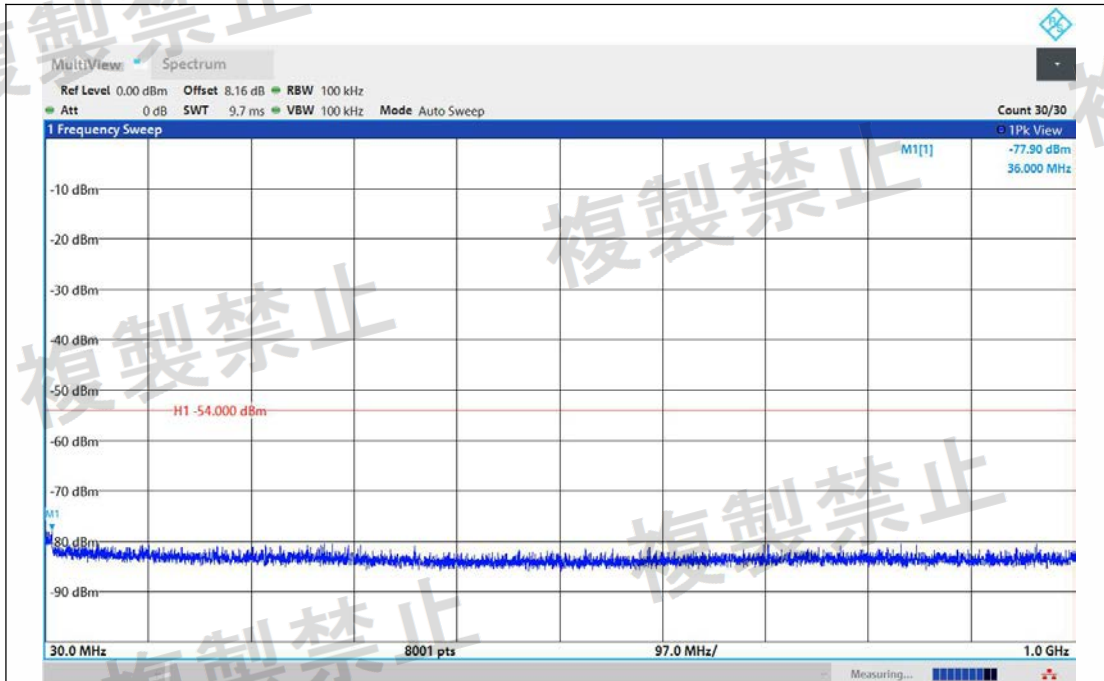


NTNV-11N20MIMO-Ant1-5580-30~1000-PASS

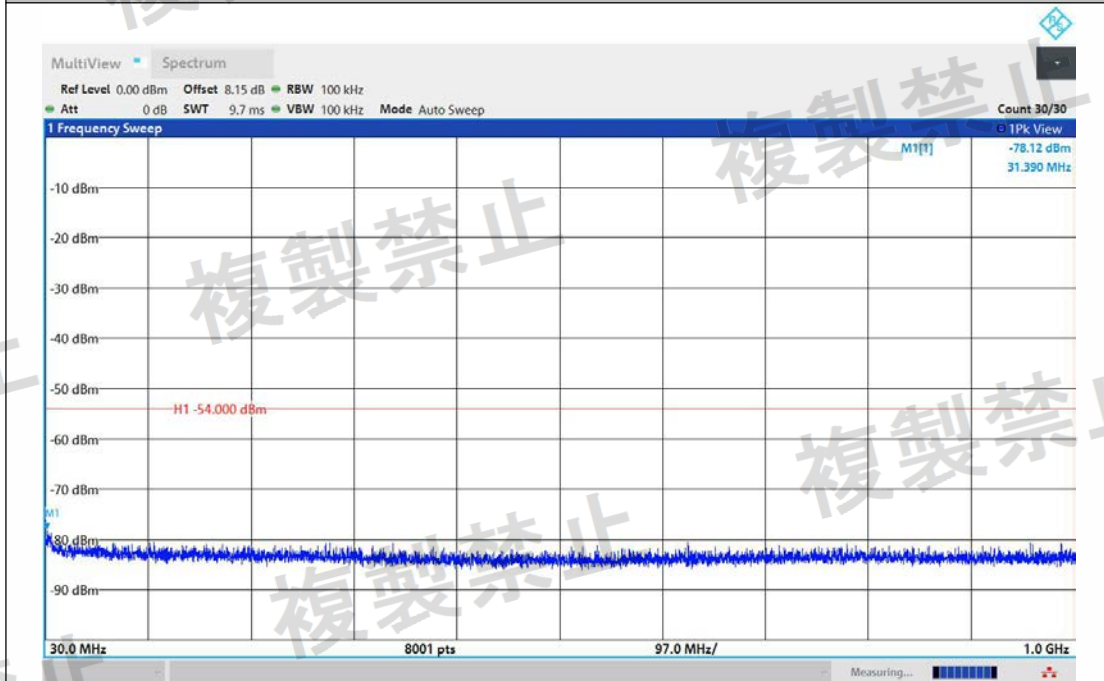


NTNV-11N20MIMO-Ant2-5580-30~1000-PASS

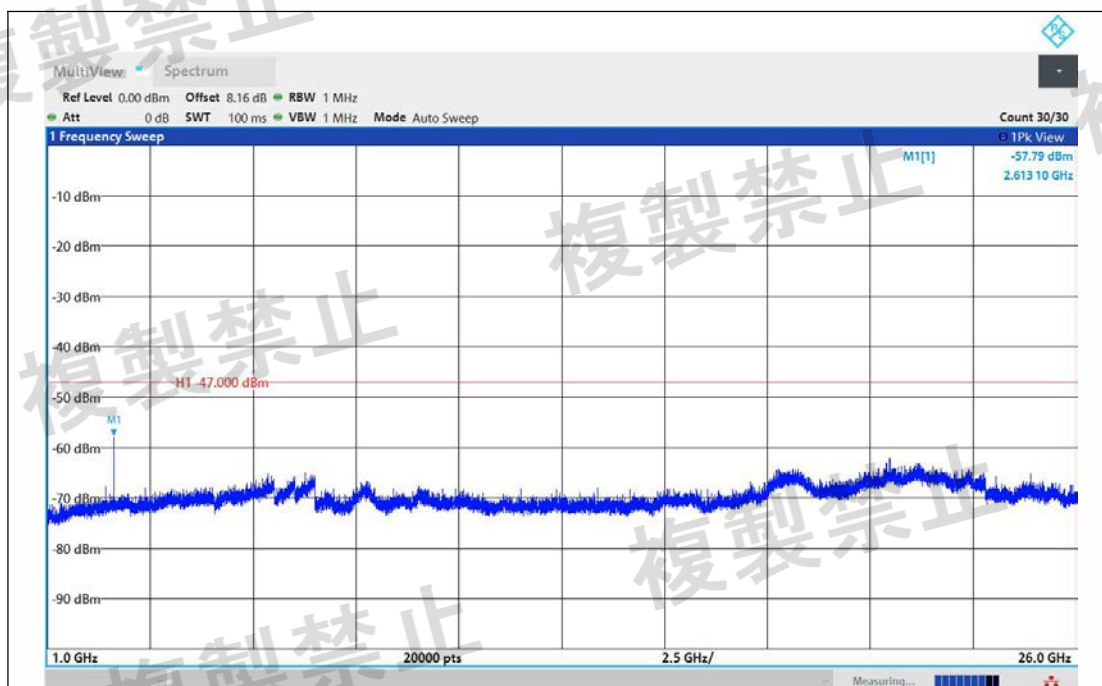


NTNV-11N20MIMO-Ant1-5580-1000~26000-PASS

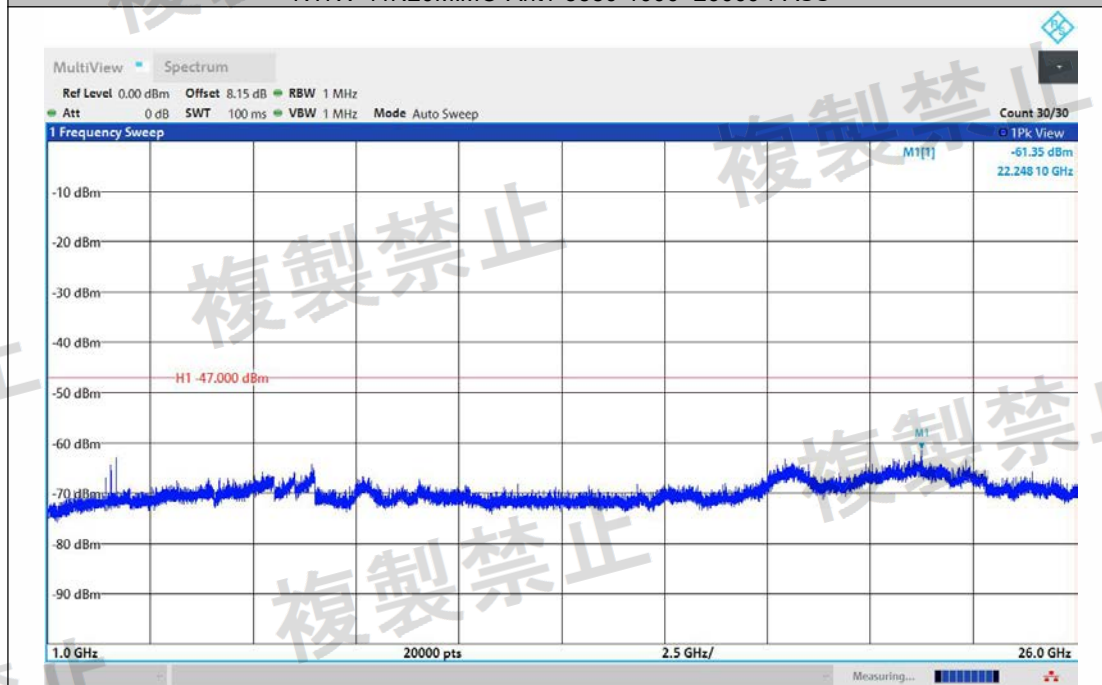


NTNV-11N20MIMO-Ant2-5580-1000~26000-PASS

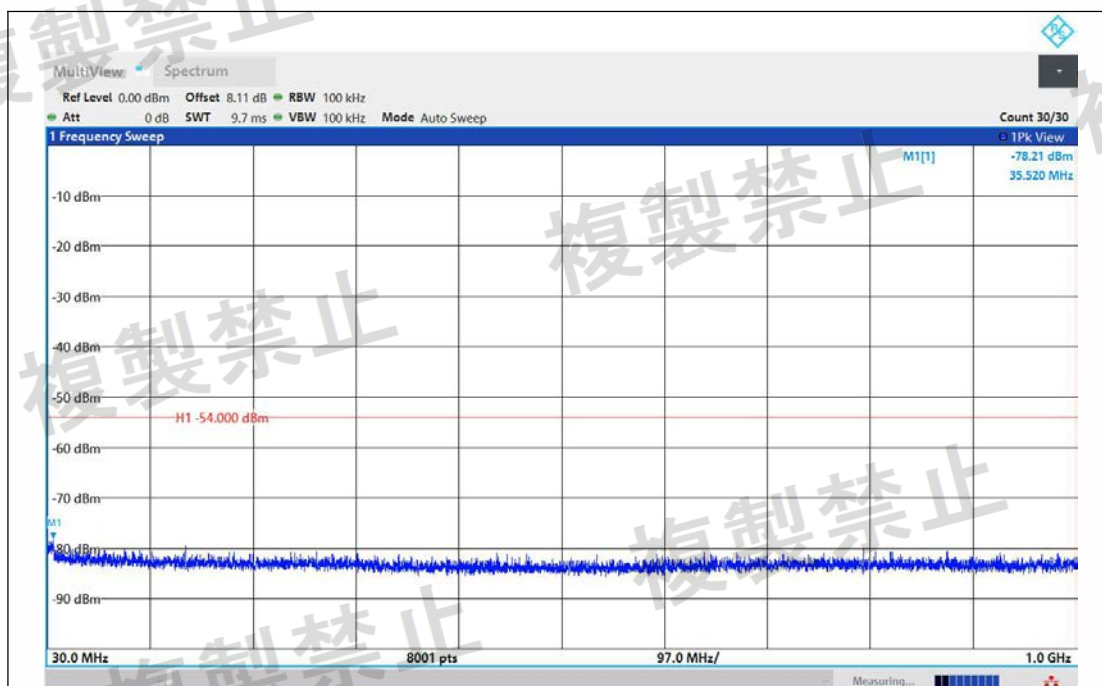


NTNV-11N20MIMO-Ant1-5700-30~1000-PASS

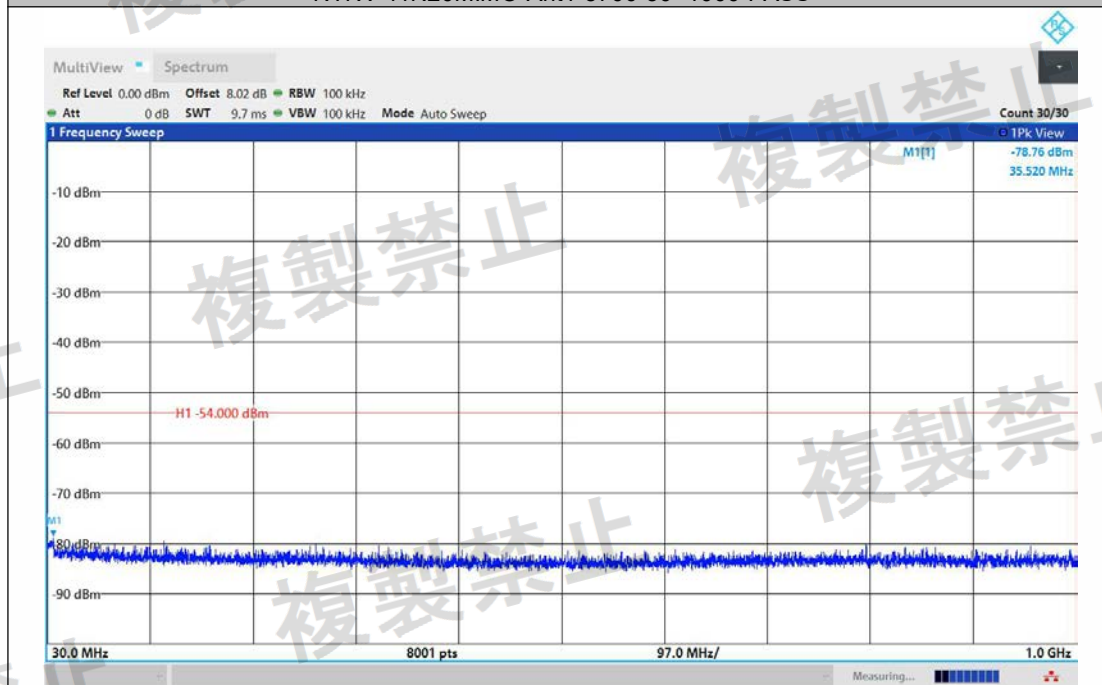


NTNV-11N20MIMO-Ant2-5700-30~1000-PASS

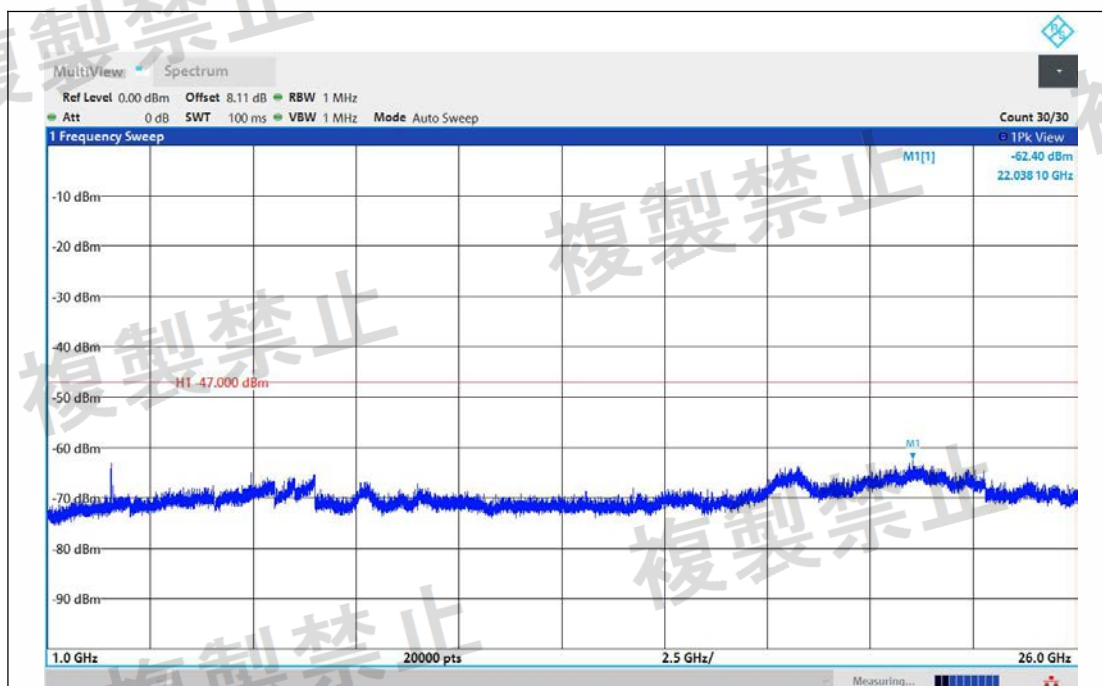


NTNV-11N20MIMO-Ant1-5700-1000~26000-PASS

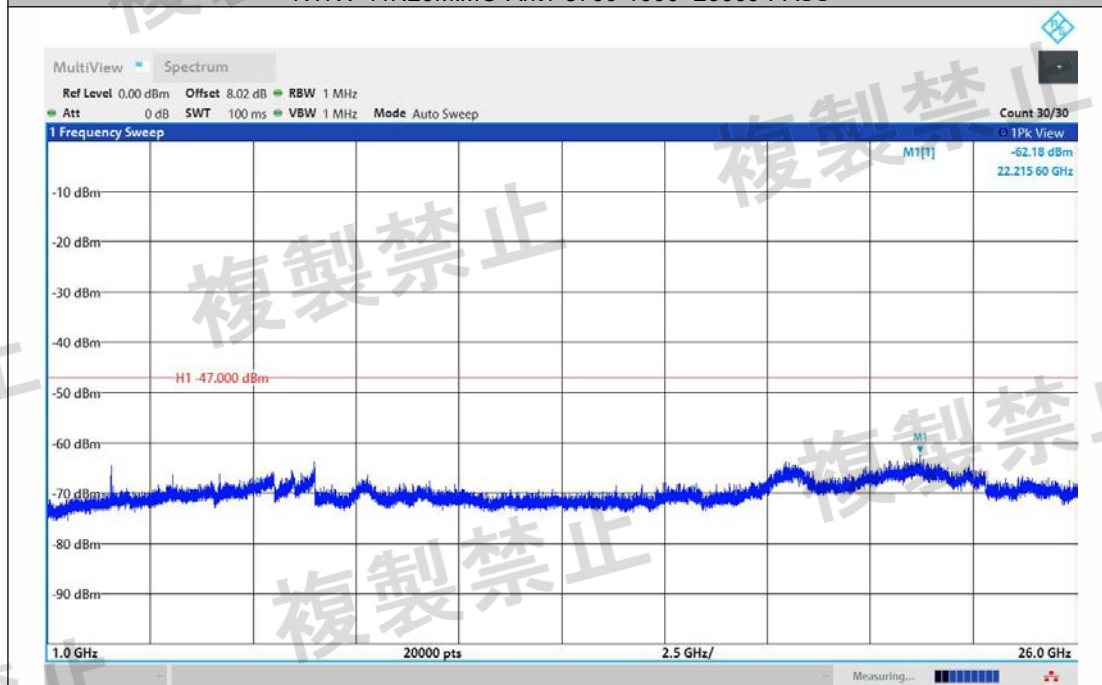


NTNV-11N20MIMO-Ant2-5700-1000~26000-PASS

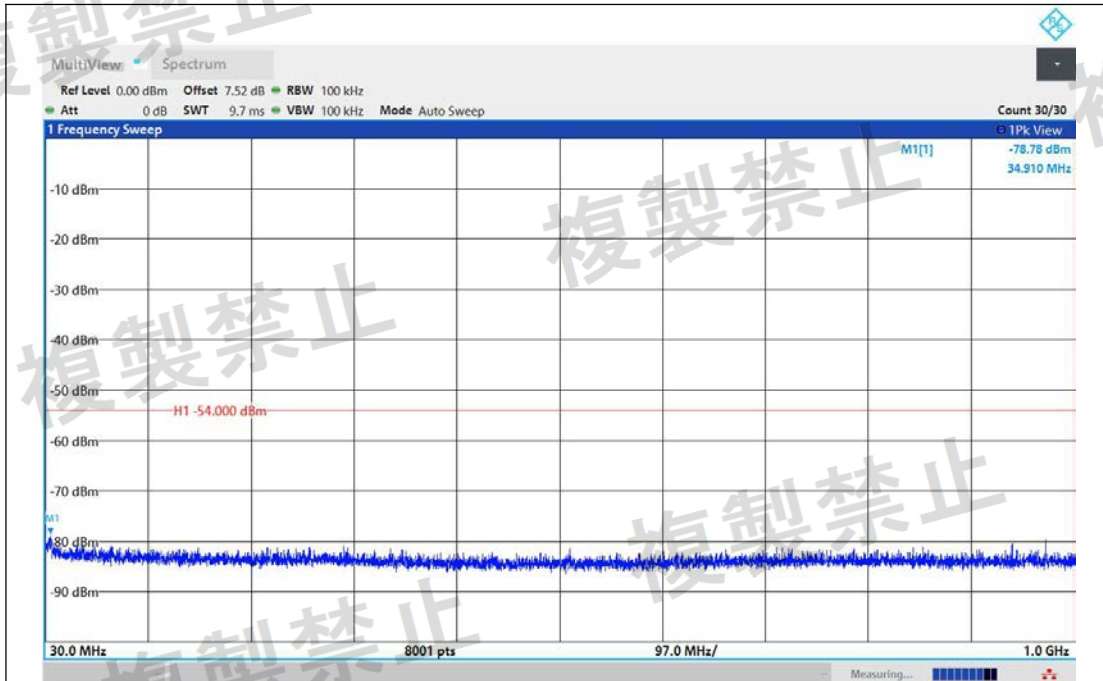


NTNV-11N40MIMO-Ant1-5190-30~1000-PASS

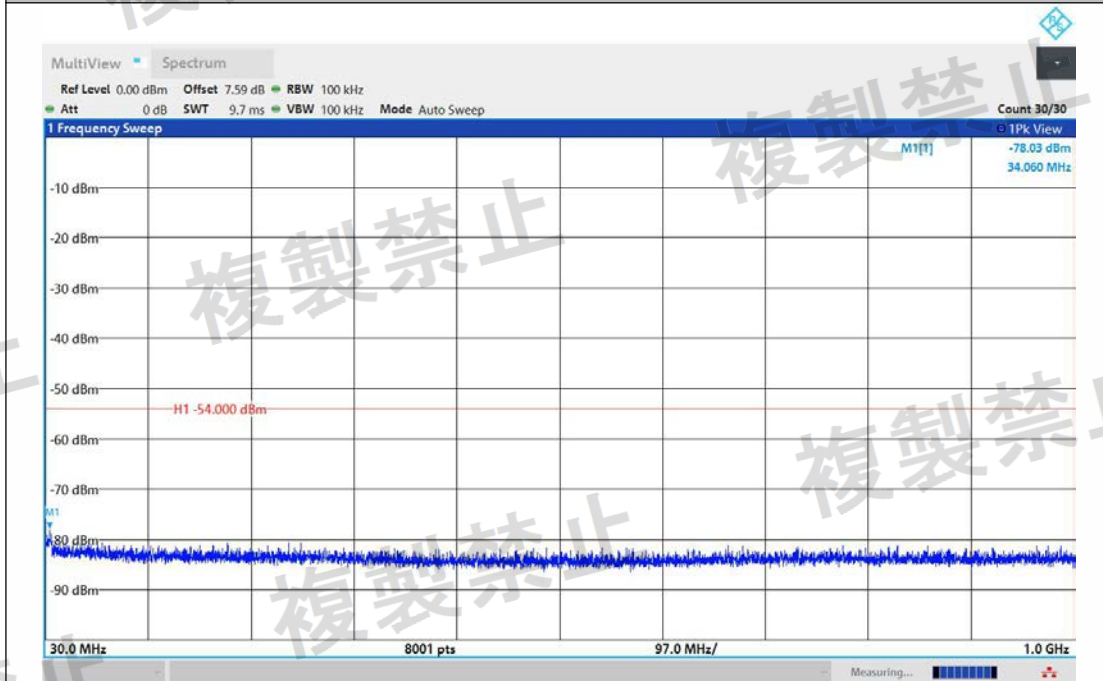


NTNV-11N40MIMO-Ant2-5190-30~1000-PASS

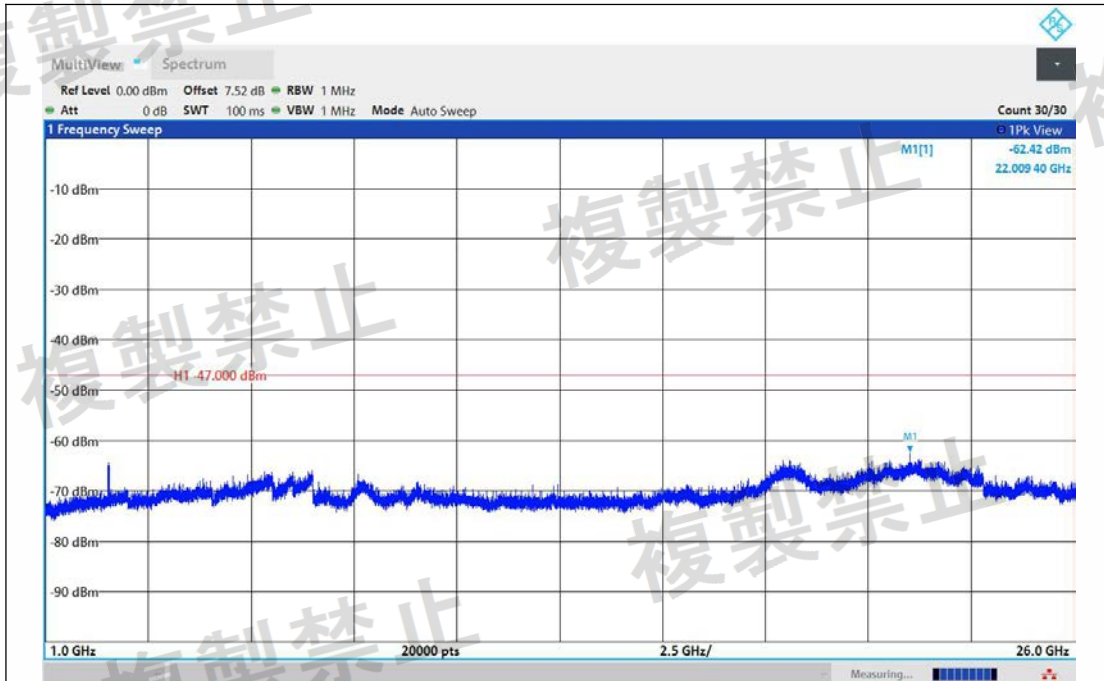


NTNV-11N40MIMO-Ant1-5190-1000~26000-PASS

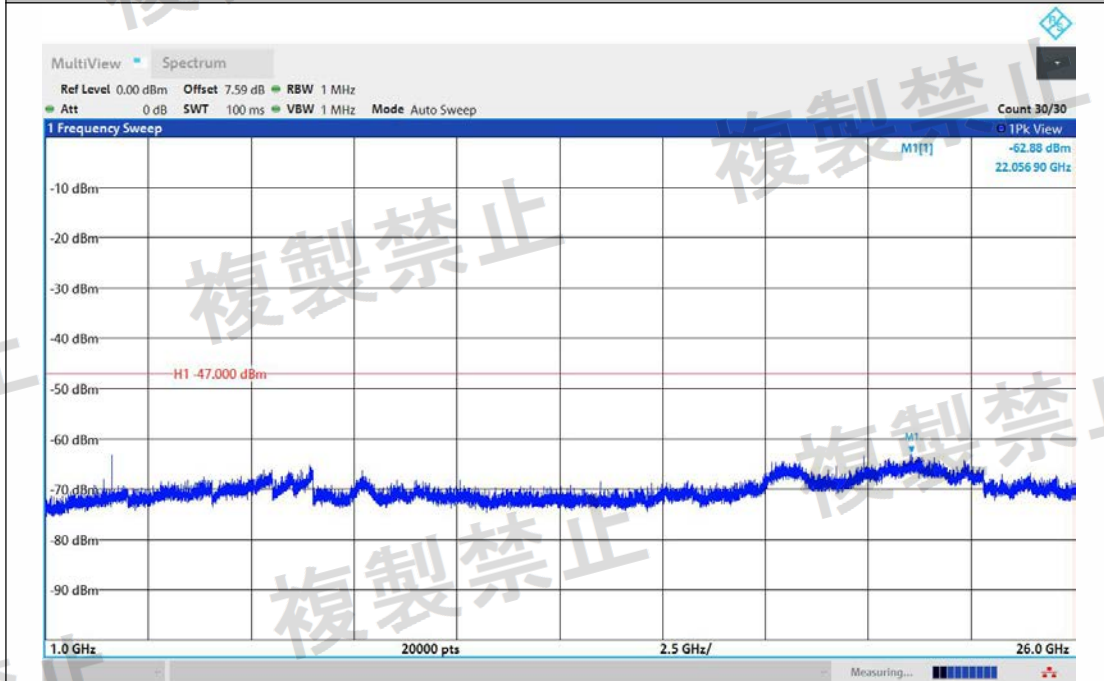


NTNV-11N40MIMO-Ant2-5190-1000~26000-PASS

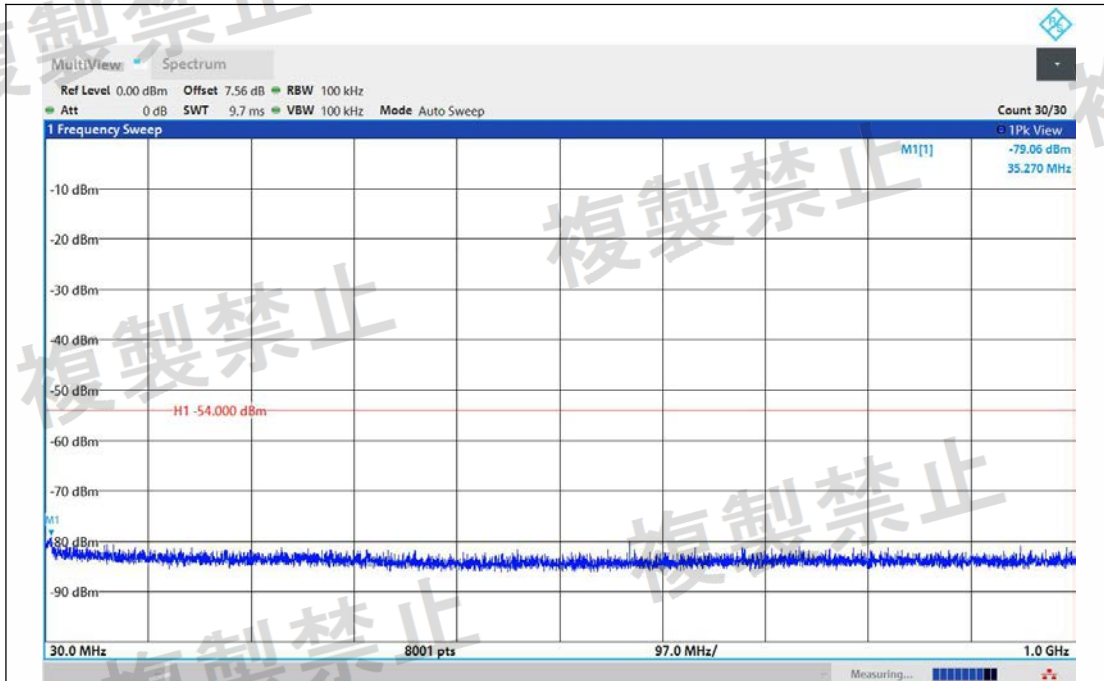


NTNV-11N40MIMO-Ant1-5230-30~1000-PASS

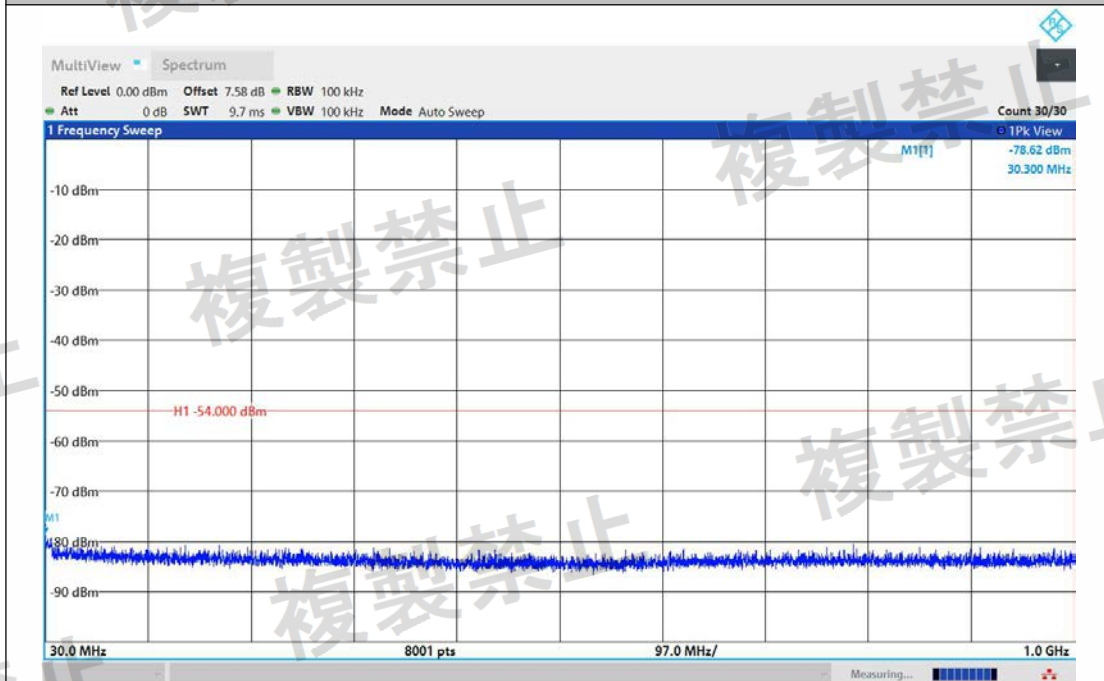


NTNV-11N40MIMO-Ant2-5230-30~1000-PASS

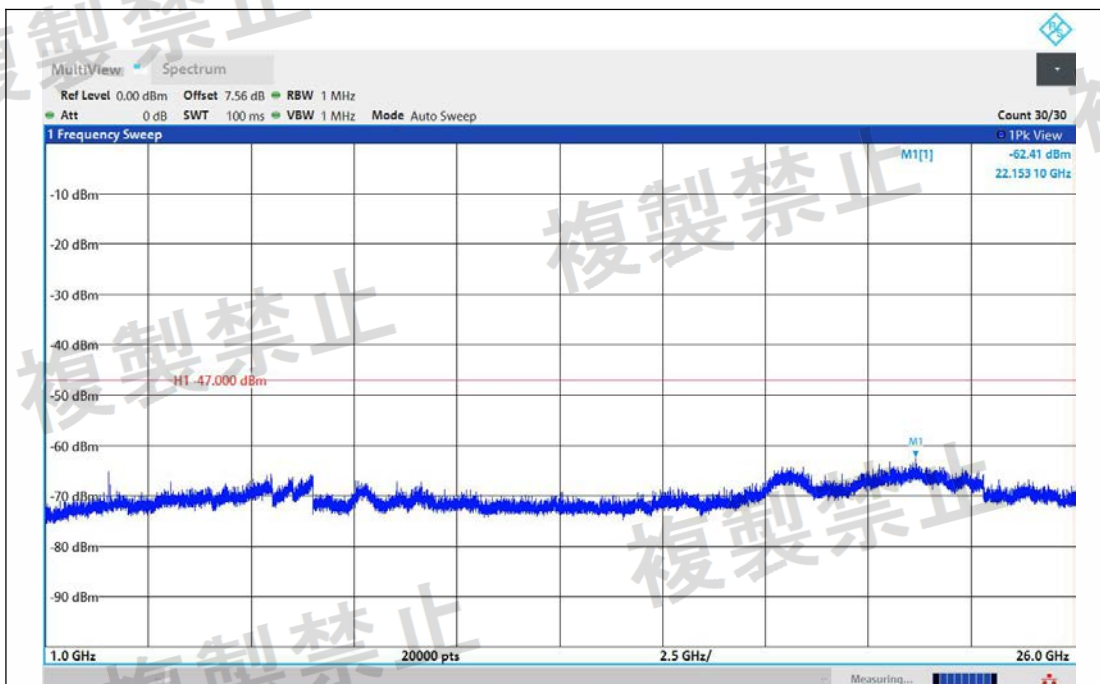


NTNV-11N40MIMO-Ant1-5230-1000~26000-PASS

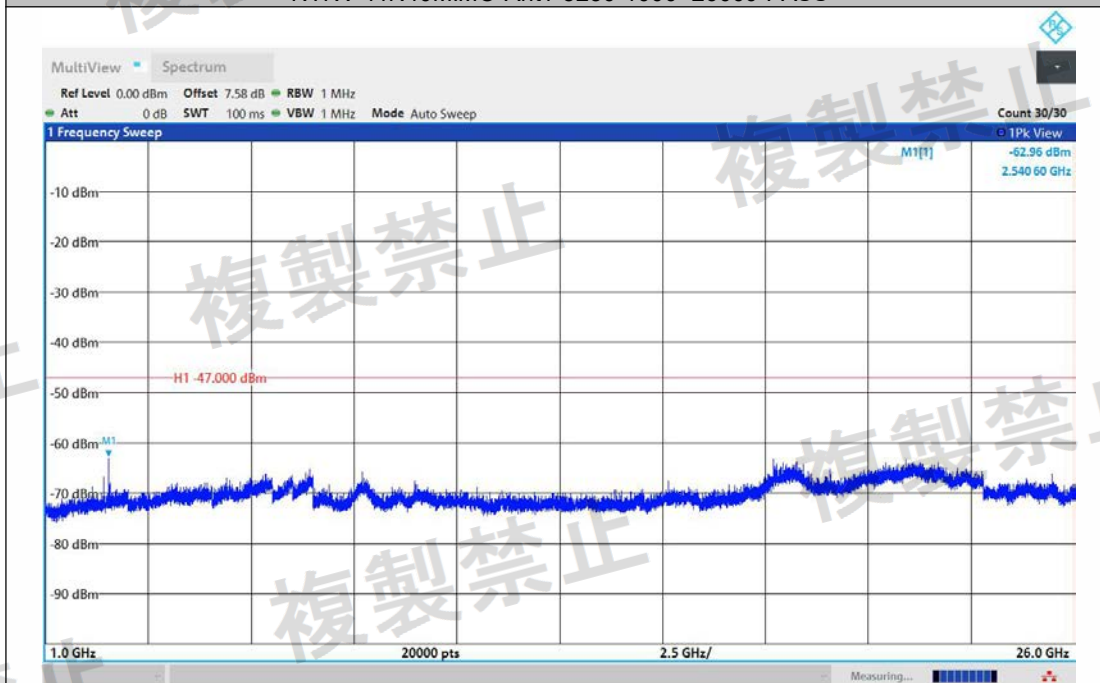


NTNV-11N40MIMO-Ant2-5230-1000~26000-PASS

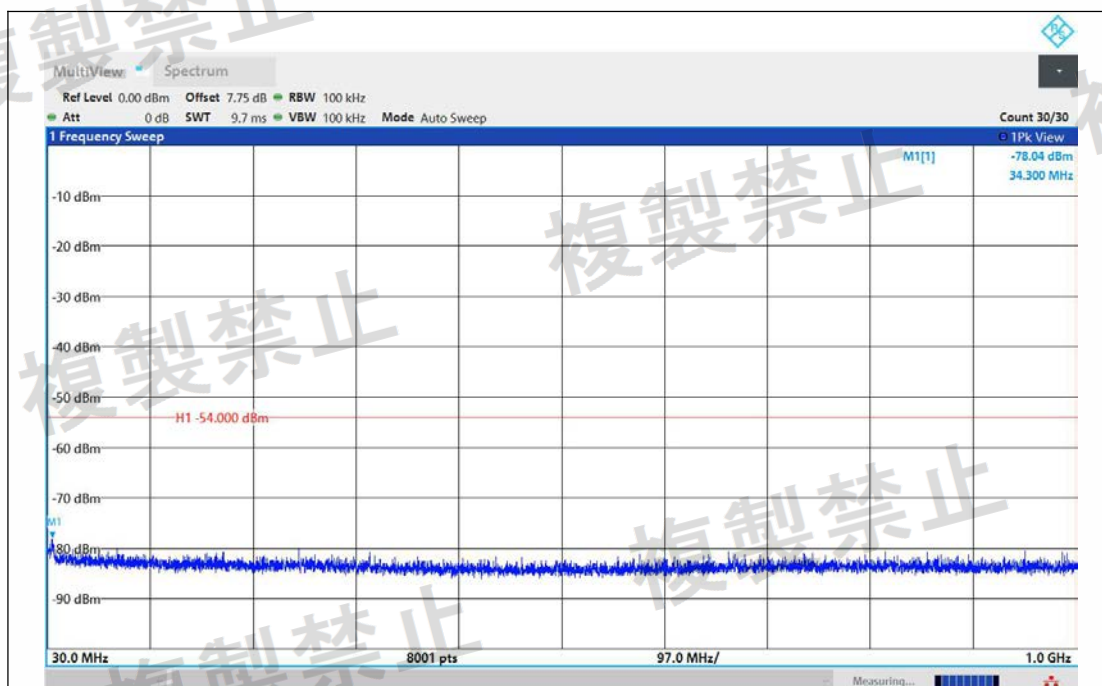


NTNV-11N40MIMO-Ant1-5270-30~1000-PASS

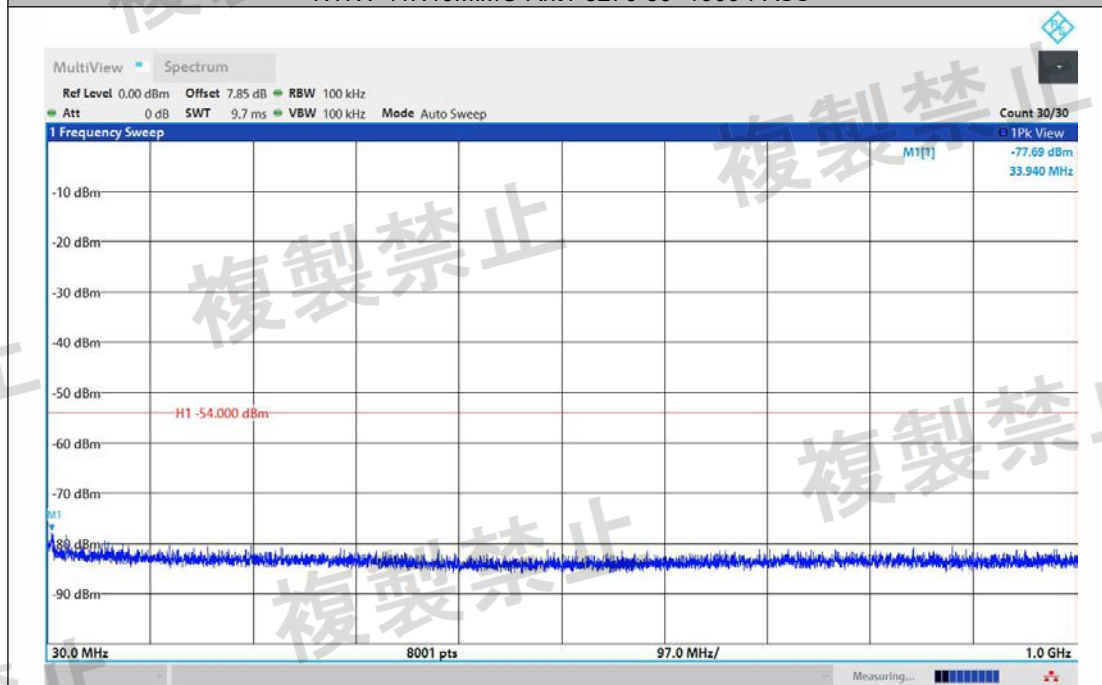


NTNV-11N40MIMO-Ant2-5270-30~1000-PASS

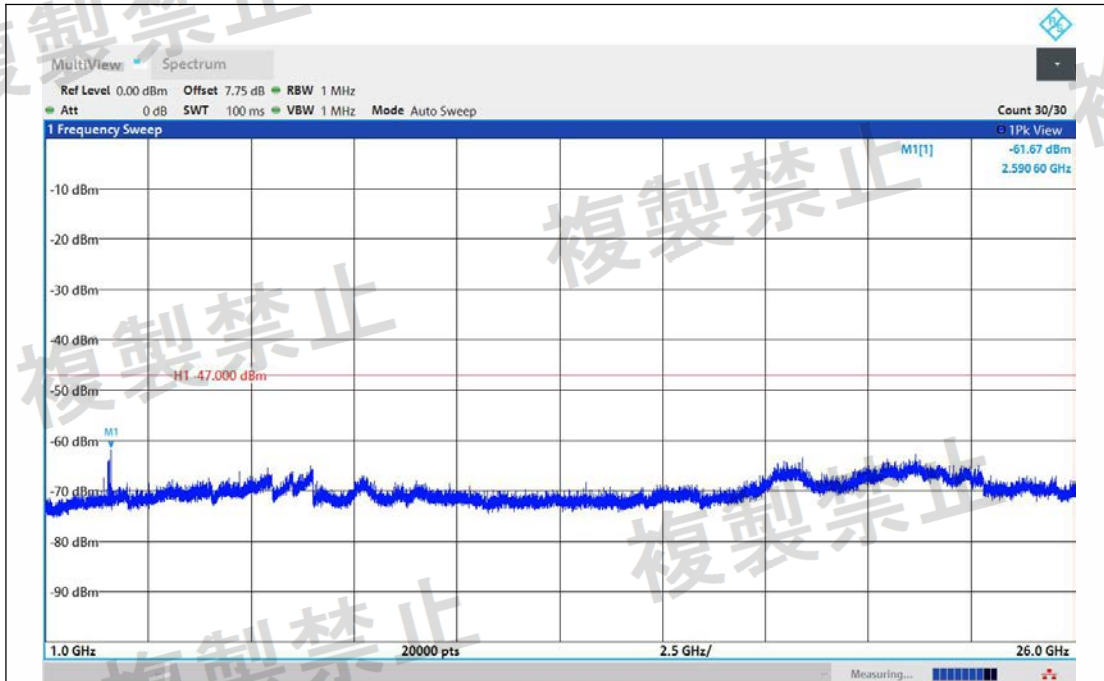


NTNV-11N40MIMO-Ant1-5270-1000~26000-PASS

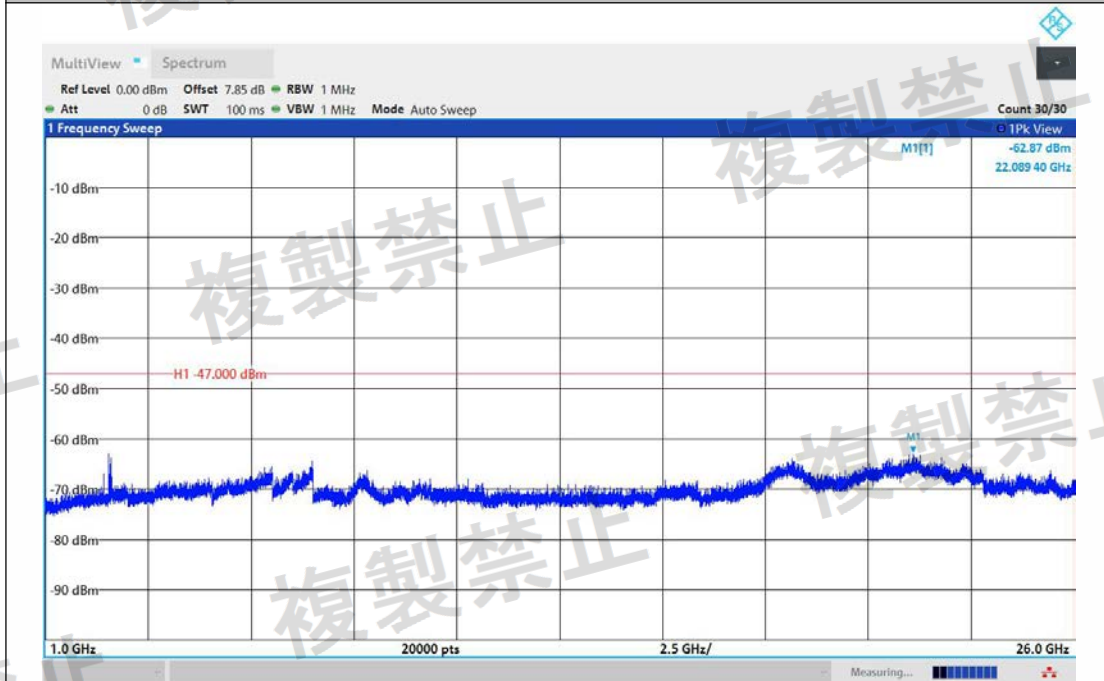


NTNV-11N40MIMO-Ant2-5270-1000~26000-PASS

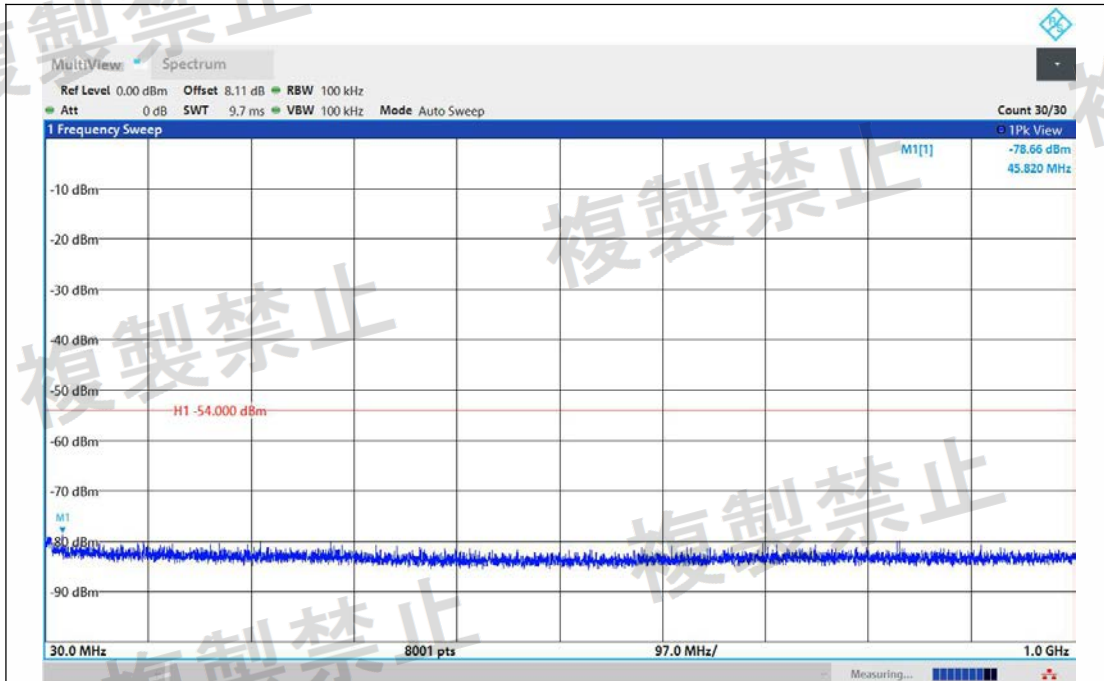


NTNV-11N40MIMO-Ant1-5310-30~1000-PASS

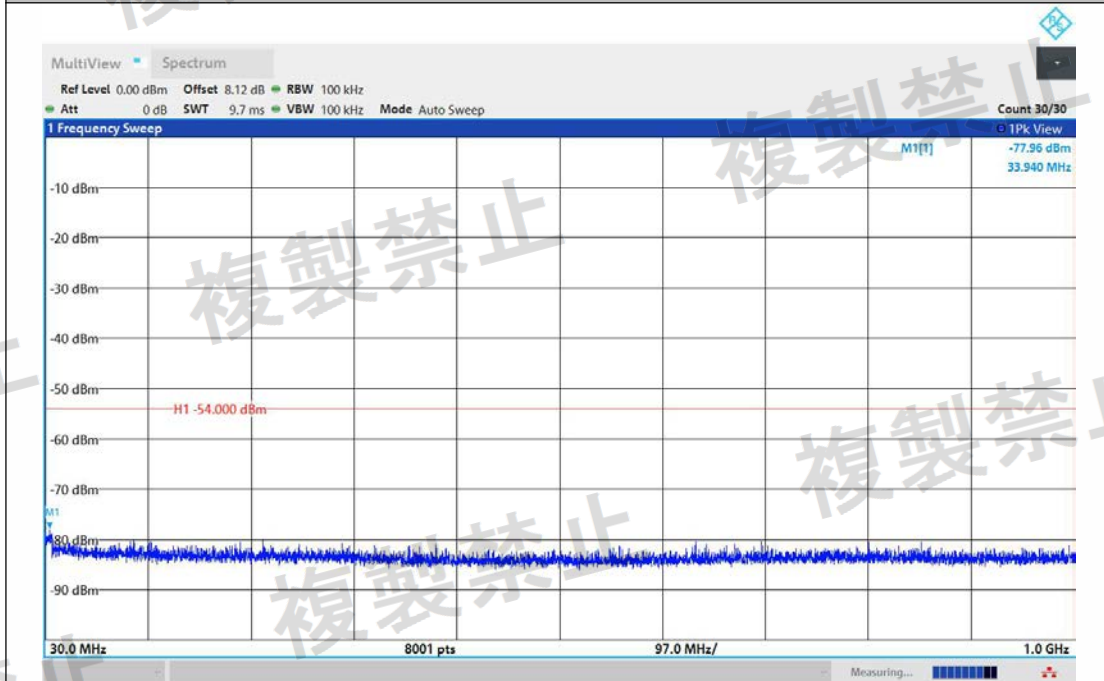


NTNV-11N40MIMO-Ant2-5310-30~1000-PASS

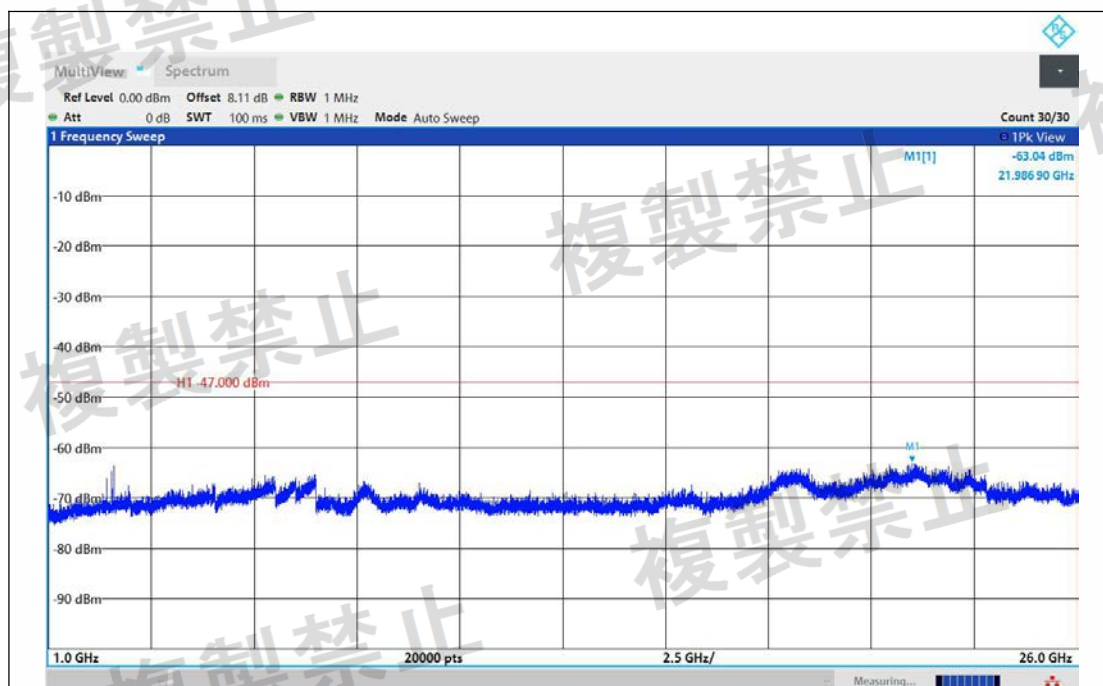


NTNV-11N40MIMO-Ant1-5310-1000~26000-PASS

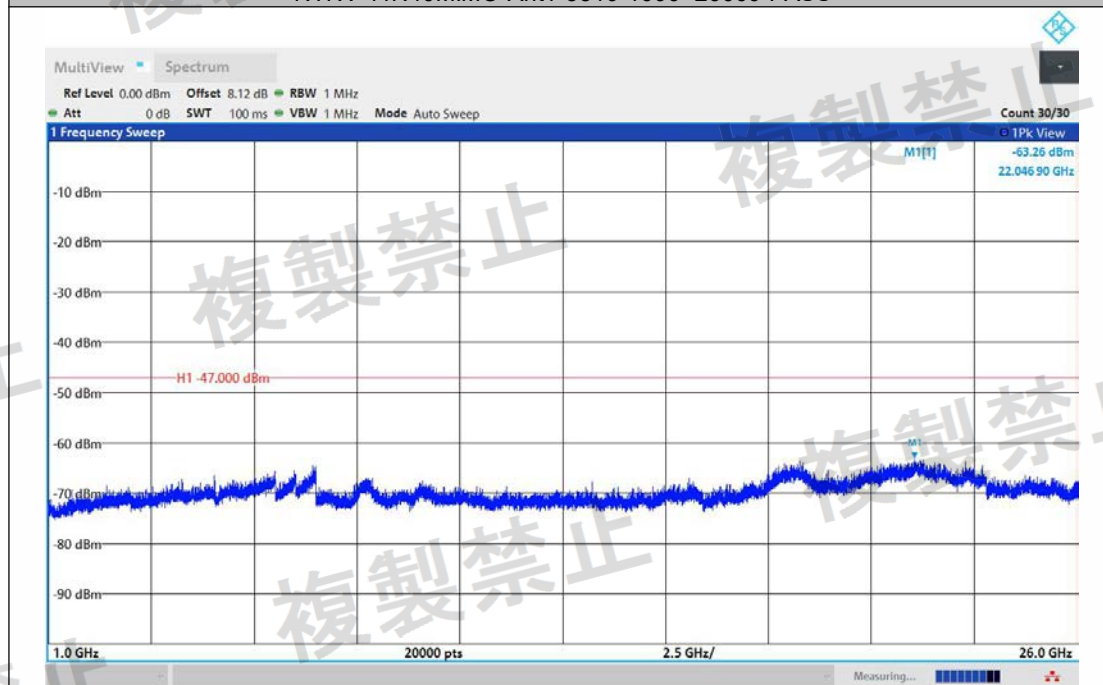


NTNV-11N40MIMO-Ant2-5310-1000~26000-PASS

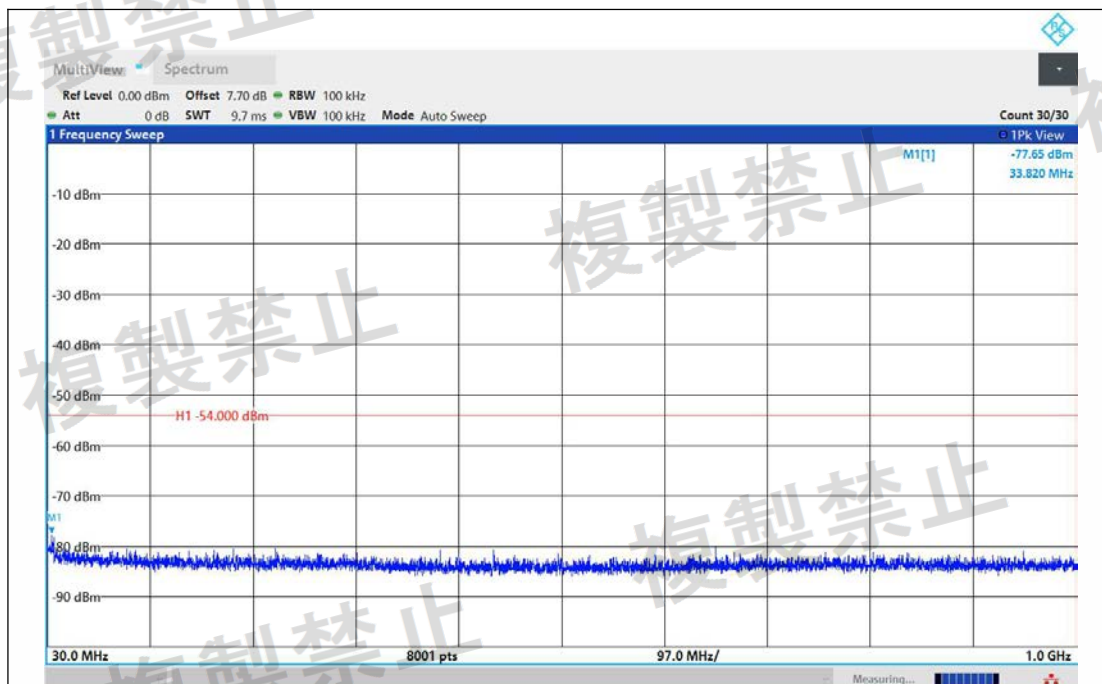


NTNV-11N40MIMO-Ant1-5510-30~1000-PASS

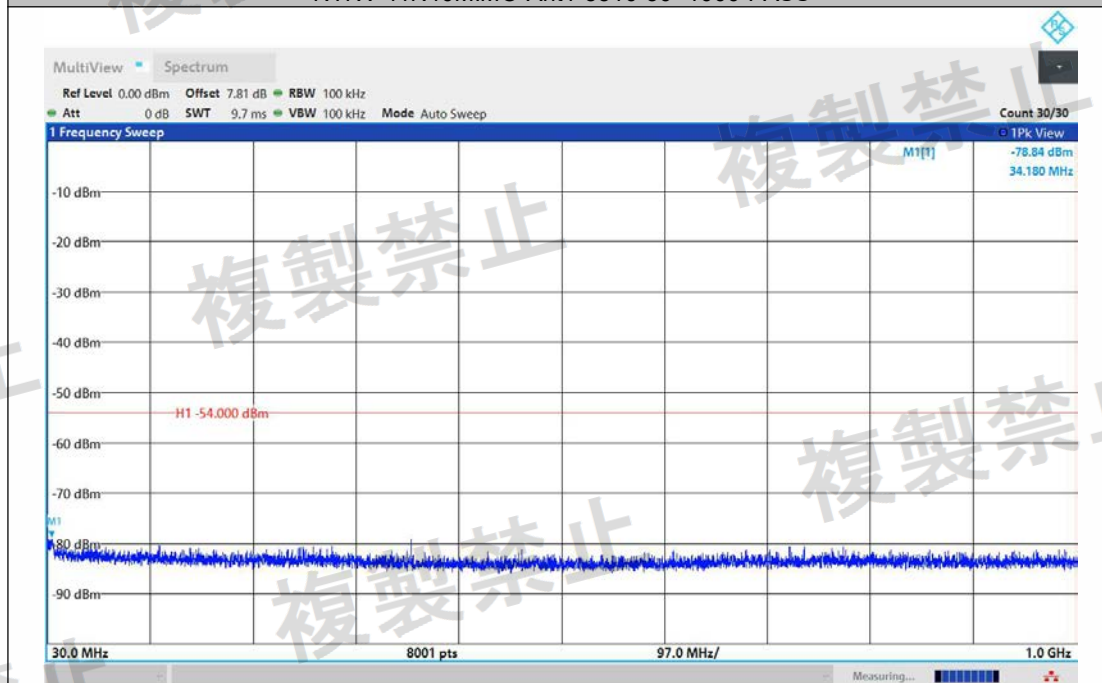


NTNV-11N40MIMO-Ant2-5510-30~1000-PASS

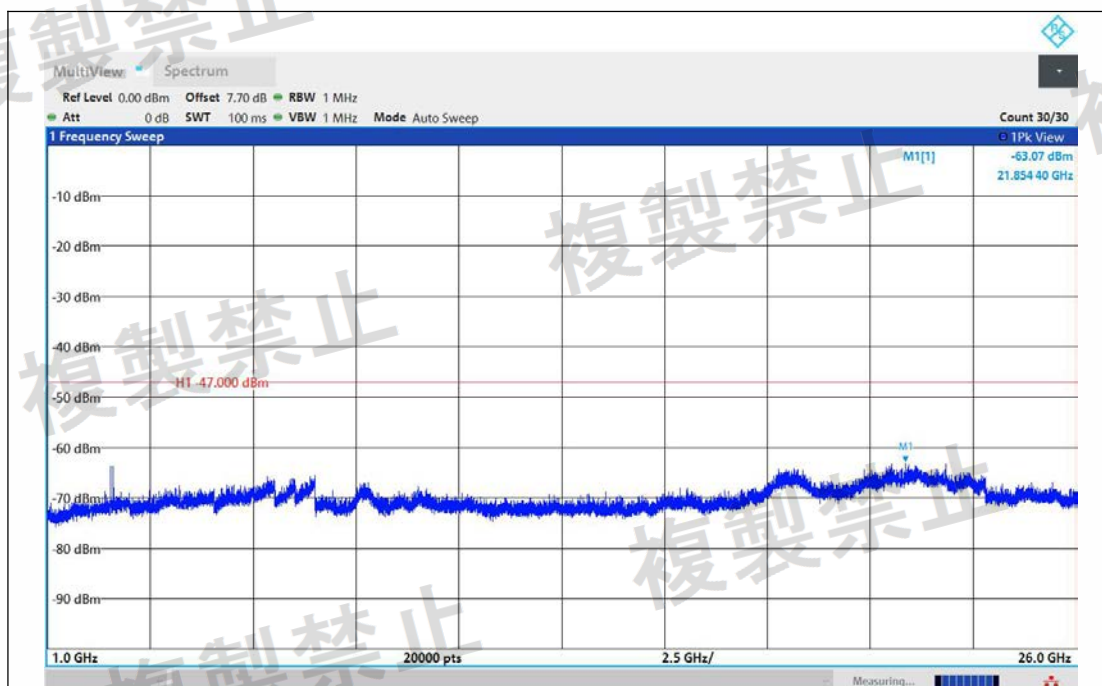


NTNV-11N40MIMO-Ant1-5510-1000~26000-PASS

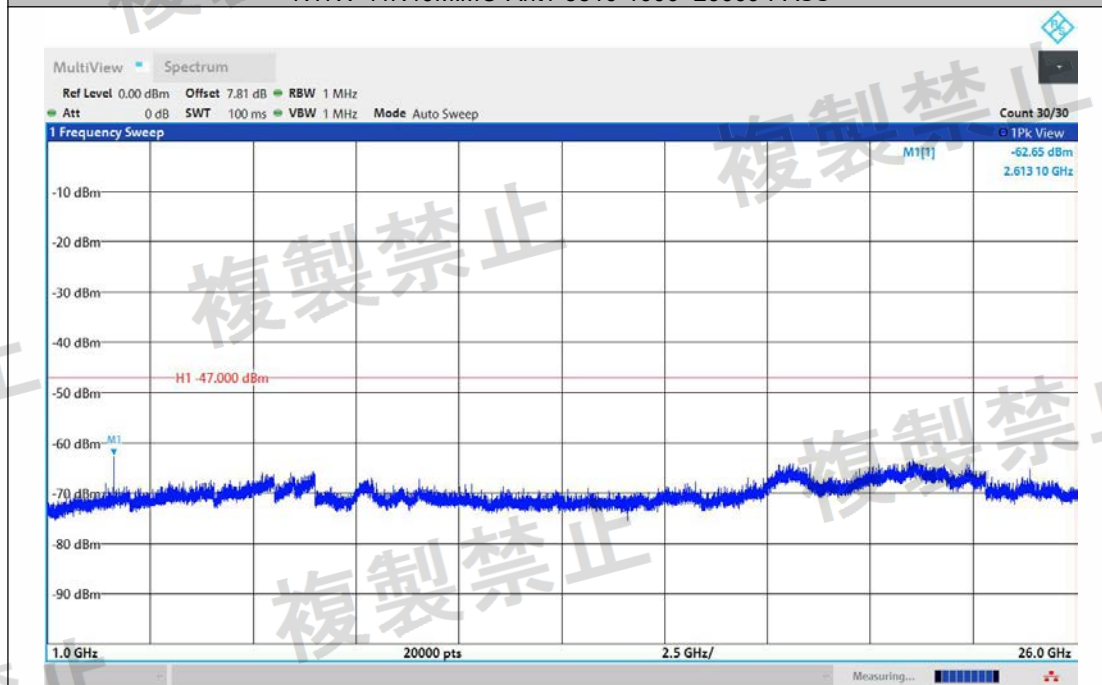


NTNV-11N40MIMO-Ant2-5510-1000~26000-PASS

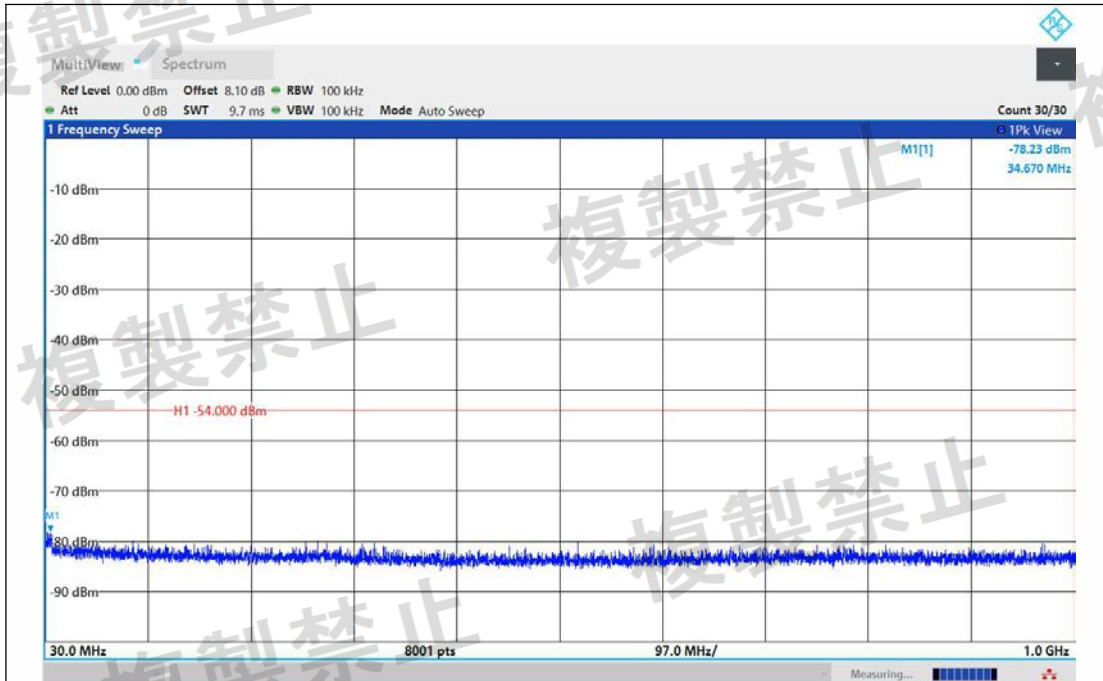


NTNV-11N40MIMO-Ant1-5670-30~1000-PASS

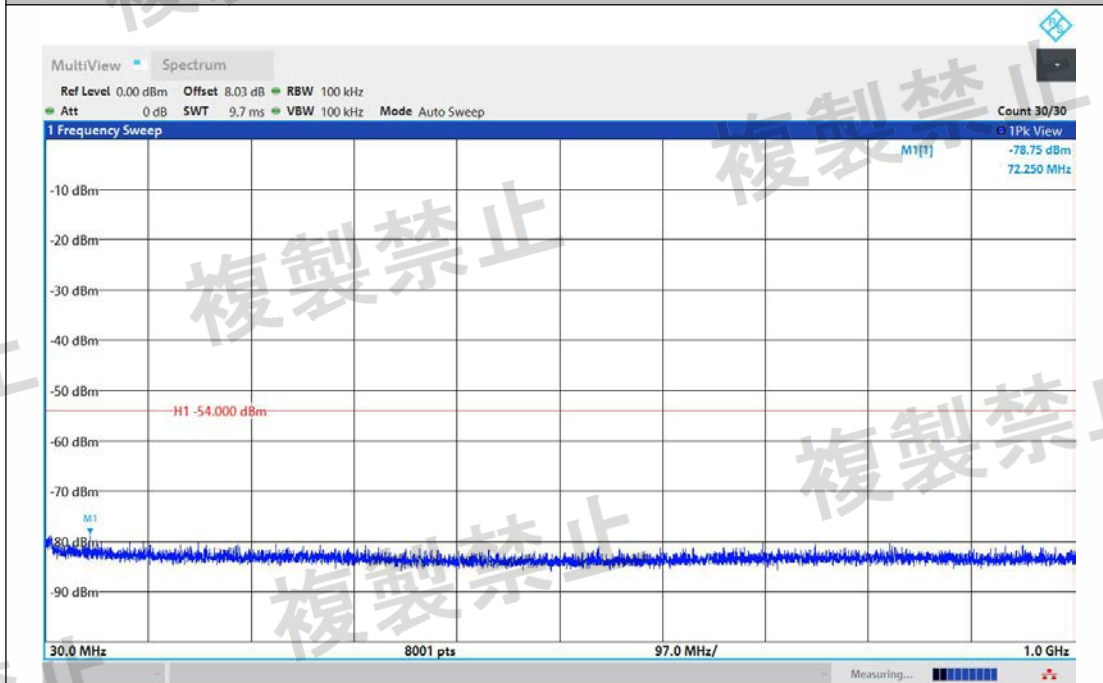


NTNV-11N40MIMO-Ant2-5670-30~1000-PASS

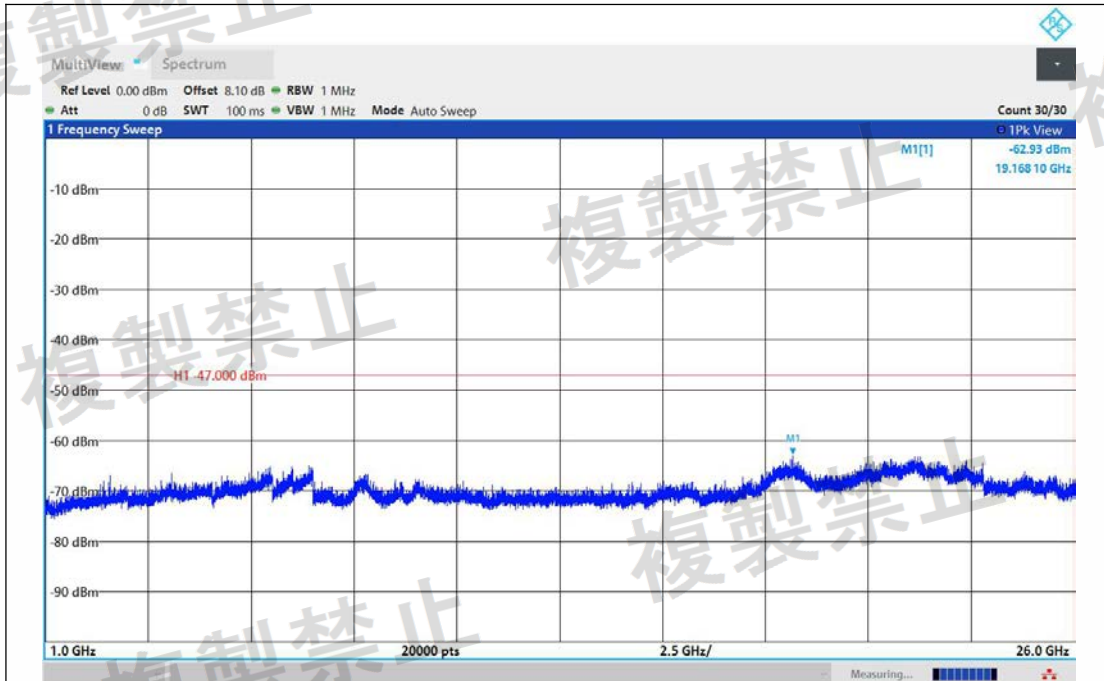


NTNV-11N40MIMO-Ant1-5670-1000~26000-PASS

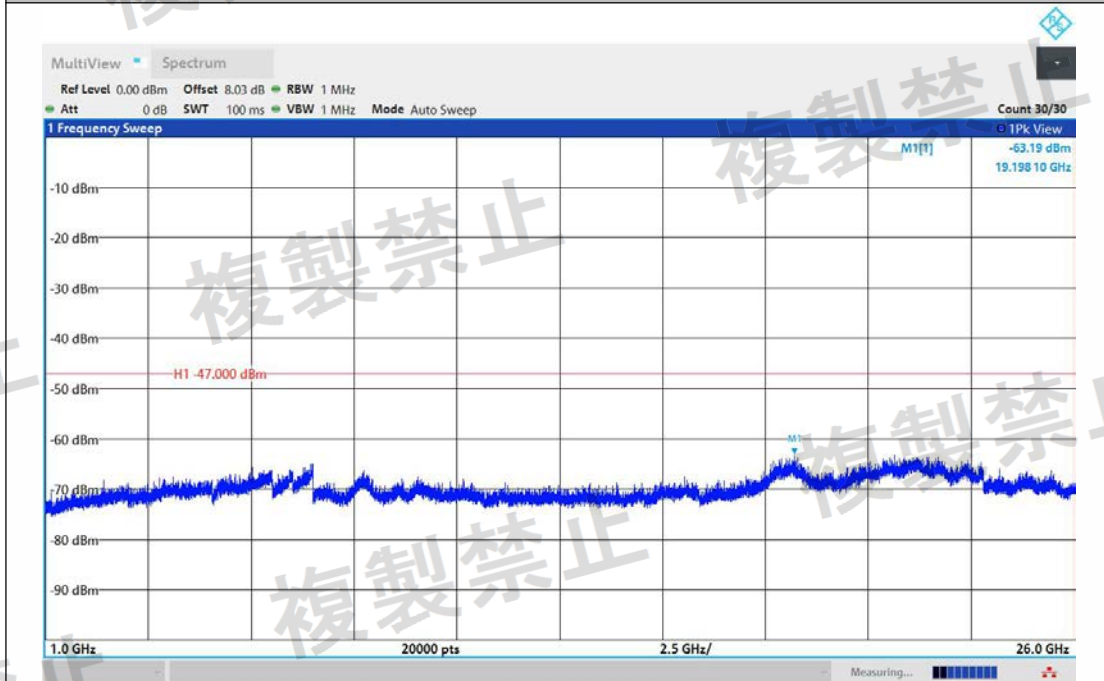


NTNV-11N40MIMO-Ant2-5670-1000~26000-PASS

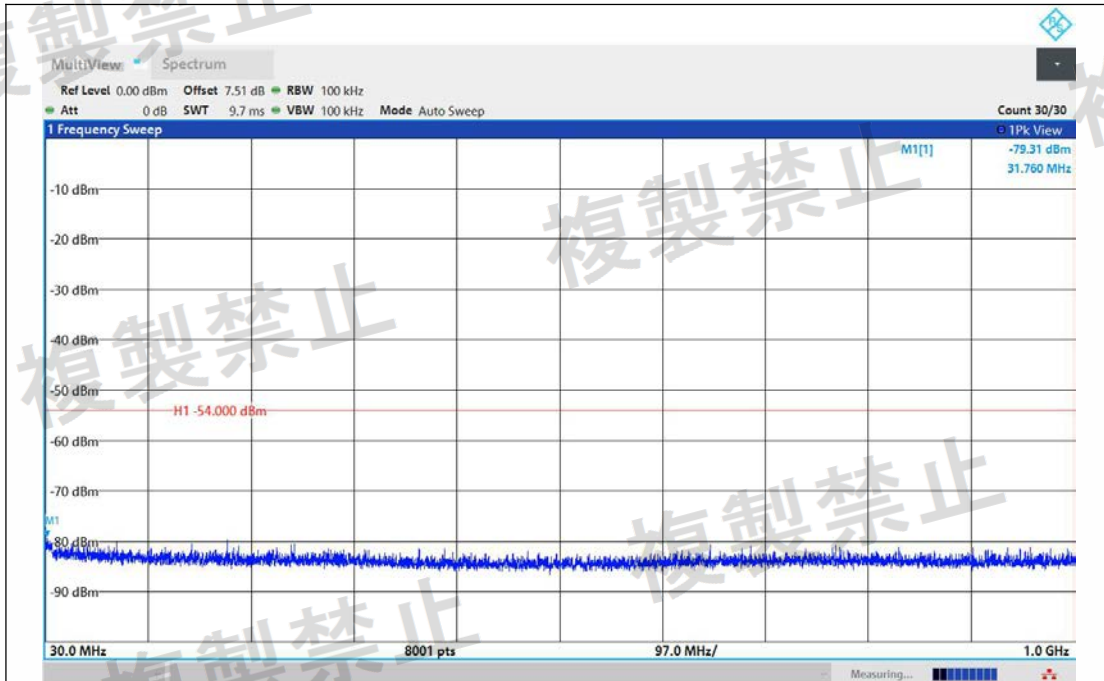


NTNV-11AC20MIMO-Ant1-5180-30~1000-PASS

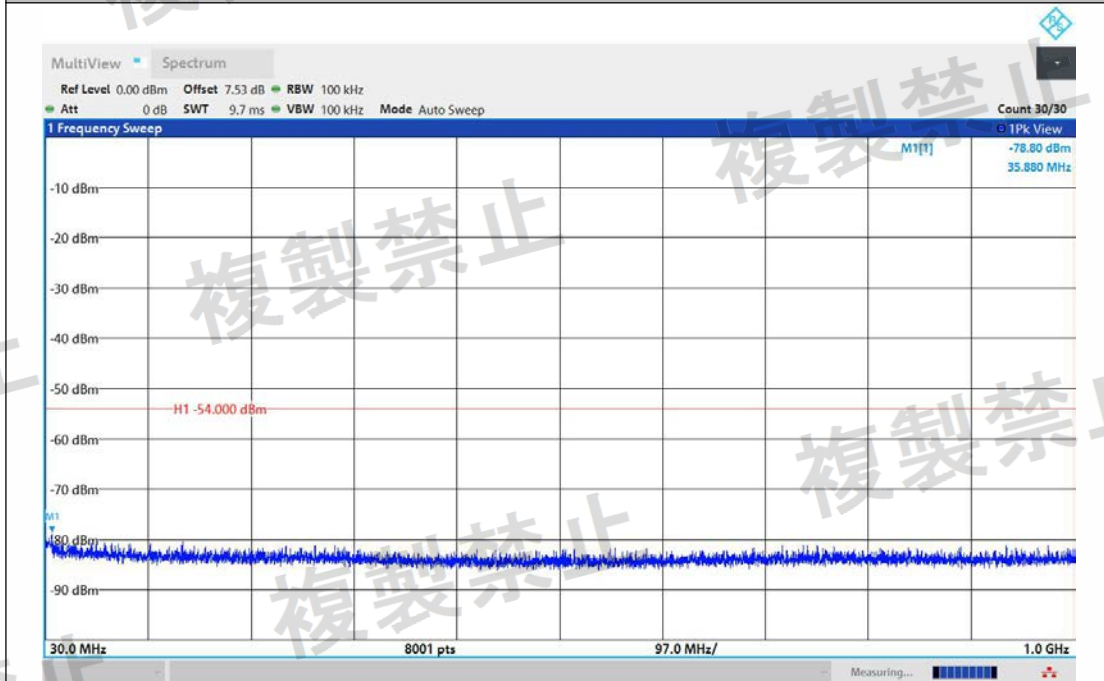


NTNV-11AC20MIMO-Ant2-5180-30~1000-PASS

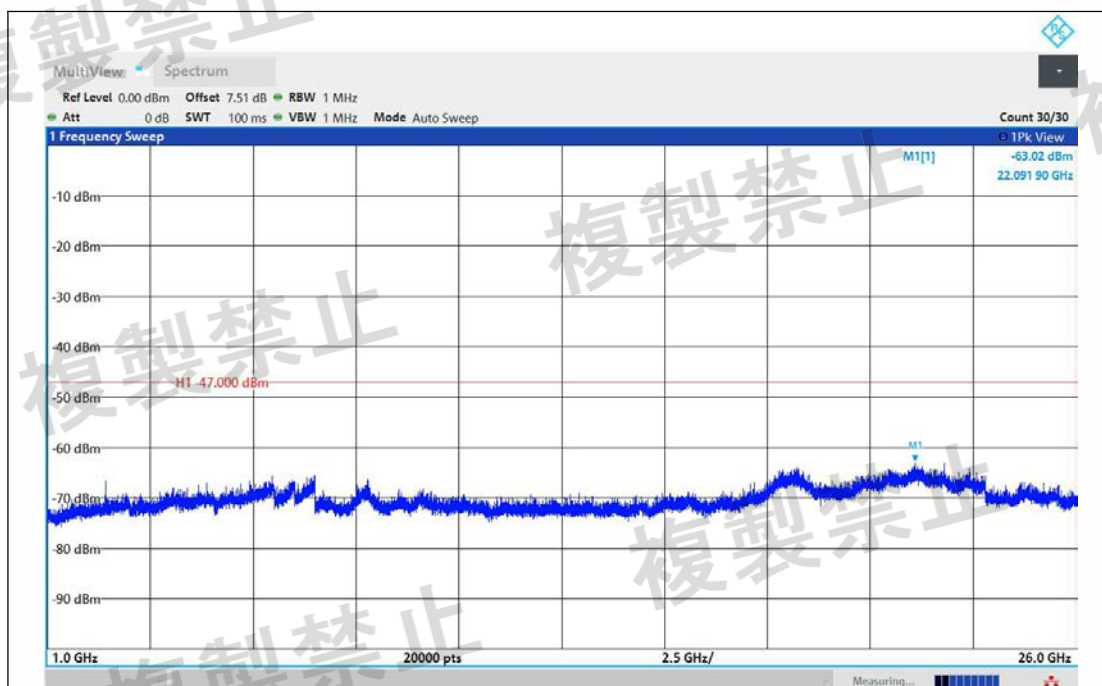


NTVN-11AC20MIMO-Ant1-5180-1000~26000-PASS

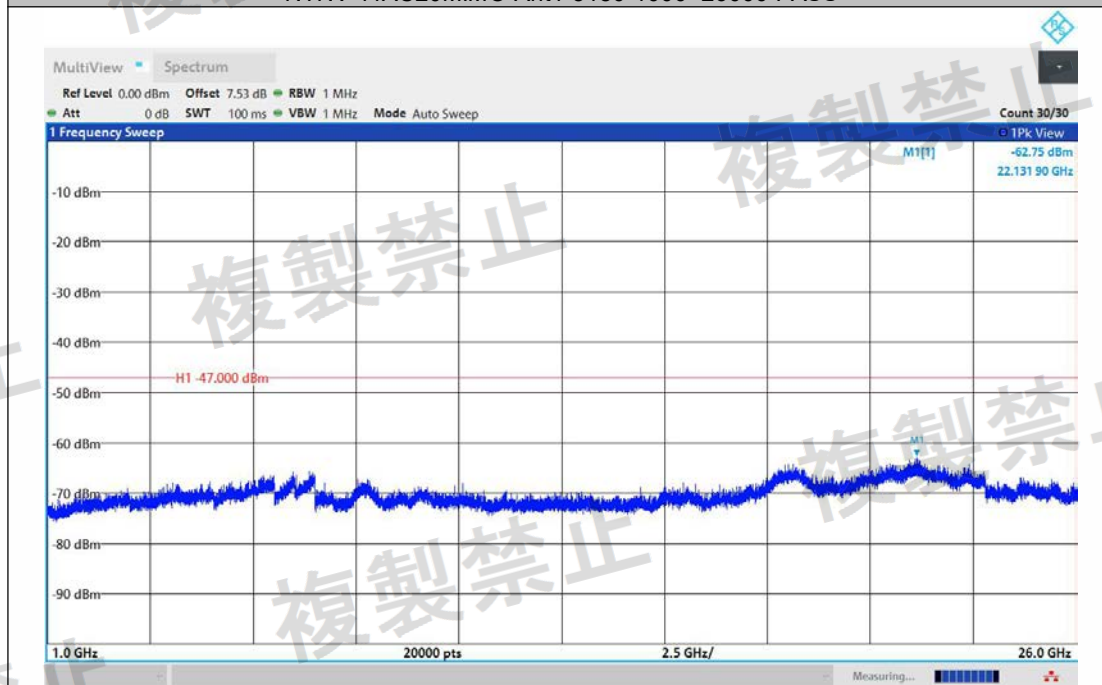


NTVN-11AC20MIMO-Ant2-5180-1000~26000-PASS

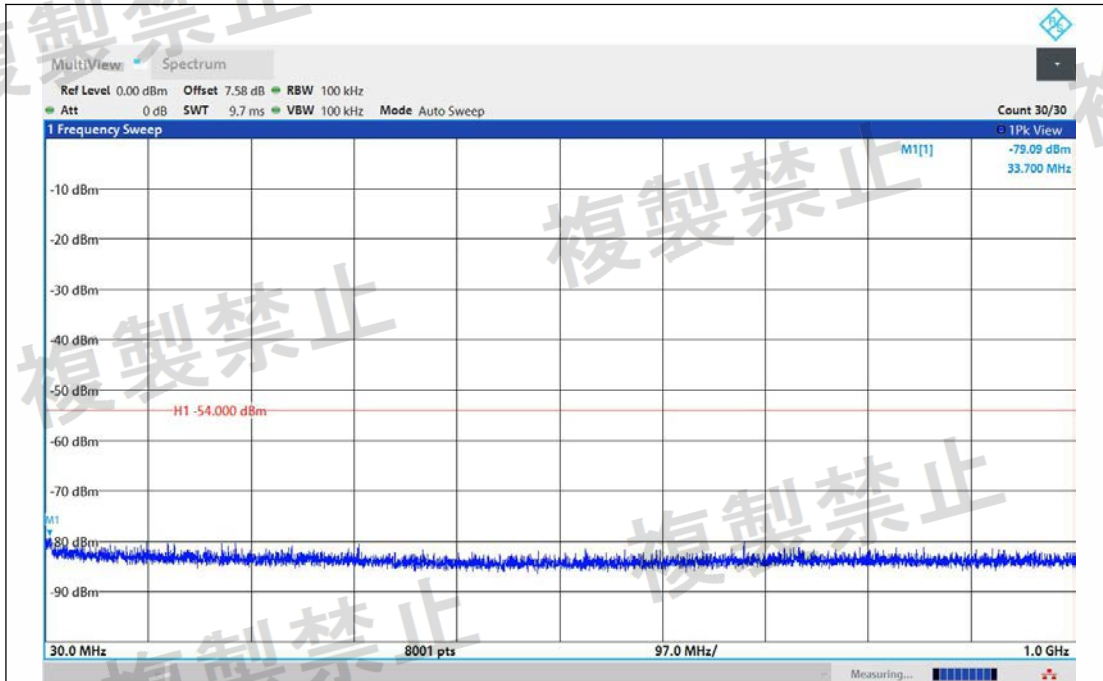


NTNV-11AC20MIMO-Ant1-5200-30~1000-PASS

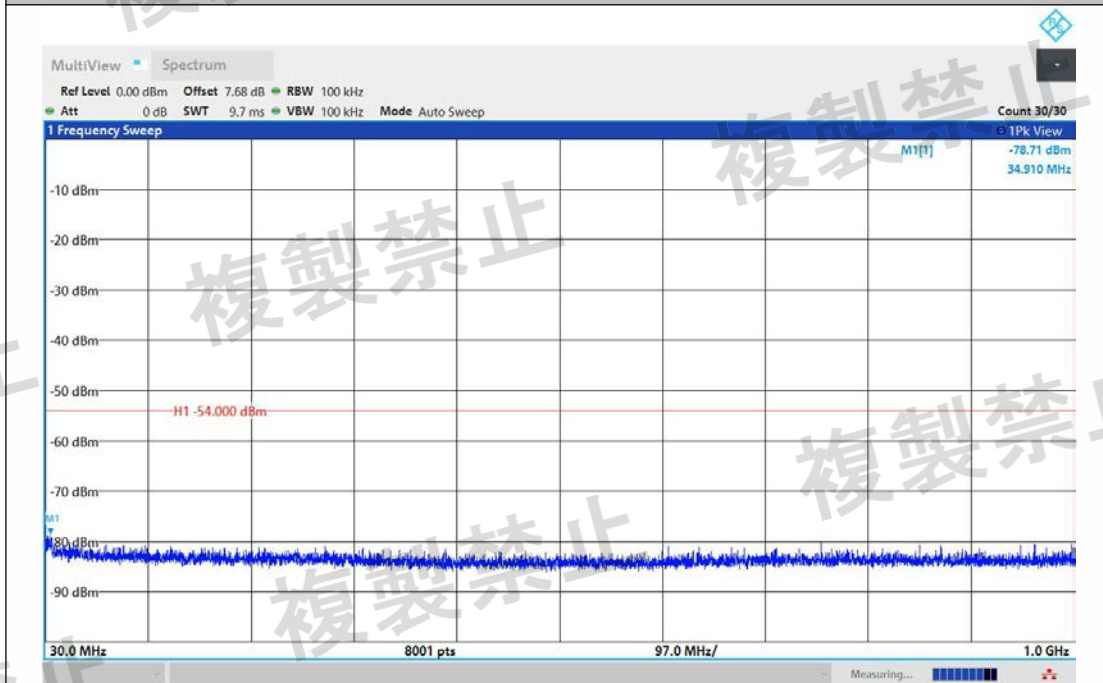


NTNV-11AC20MIMO-Ant2-5200-30~1000-PASS

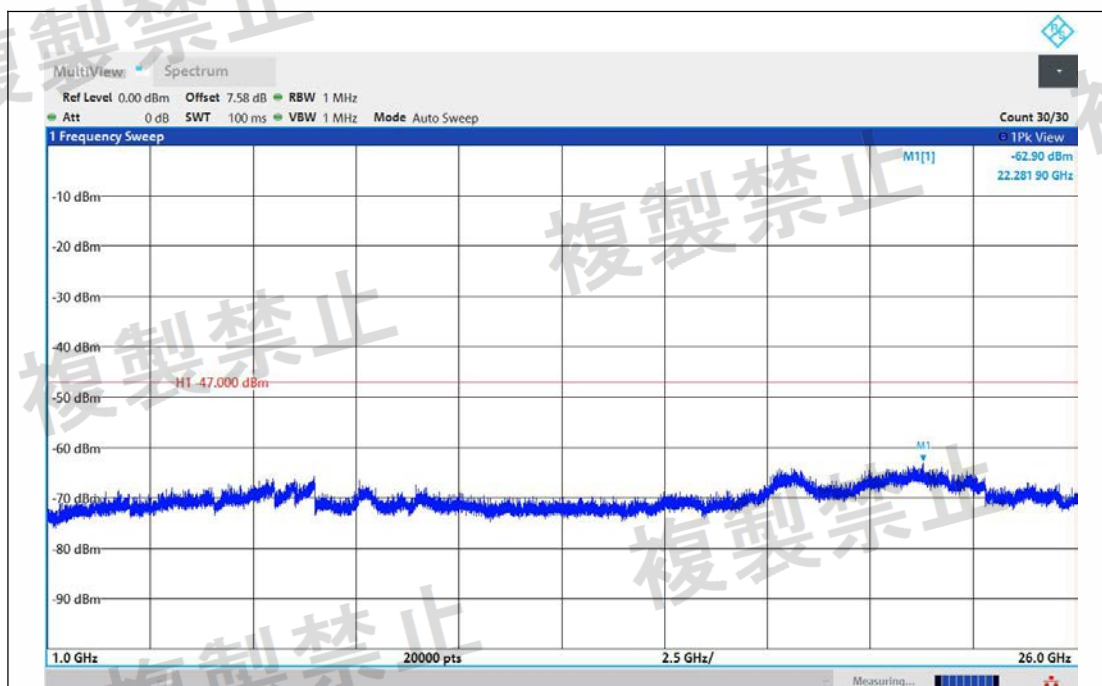


NTVN-11AC20MIMO-Ant1-5200-1000~26000-PASS

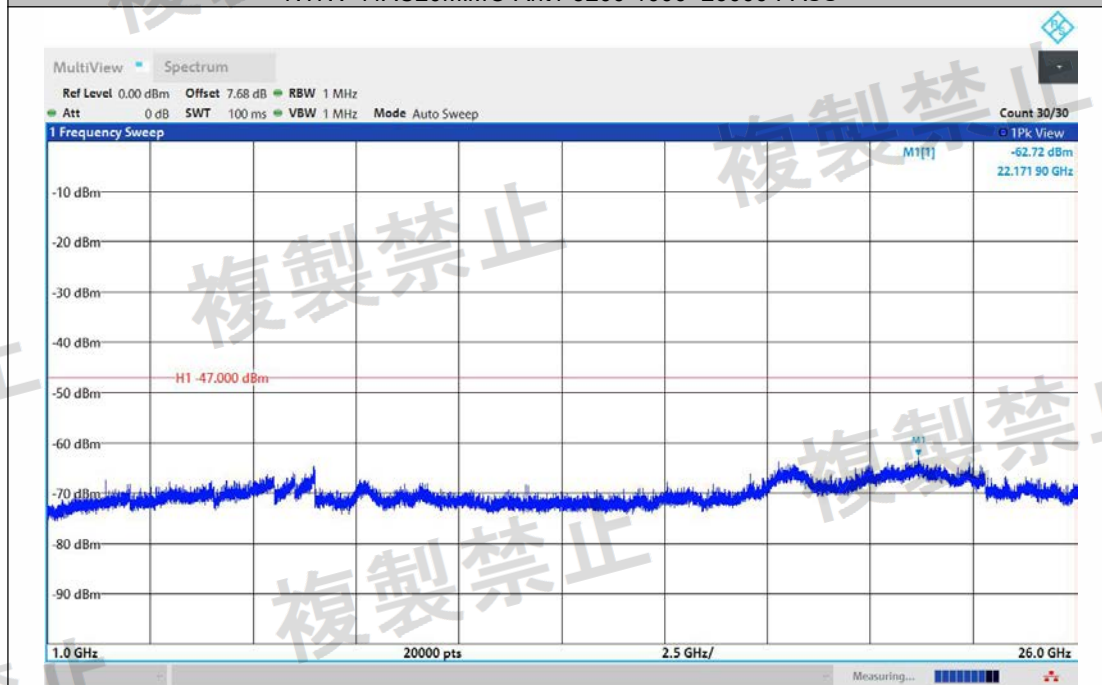


NTVN-11AC20MIMO-Ant2-5200-1000~26000-PASS

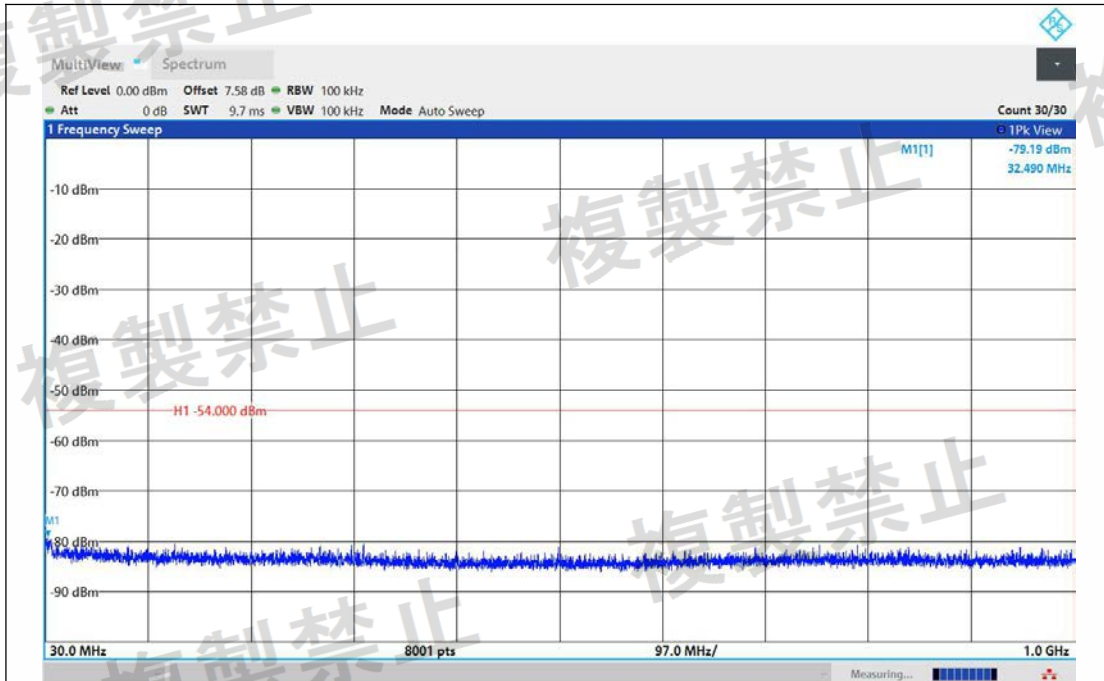


NTNV-11AC20MIMO-Ant1-5240-30~1000-PASS

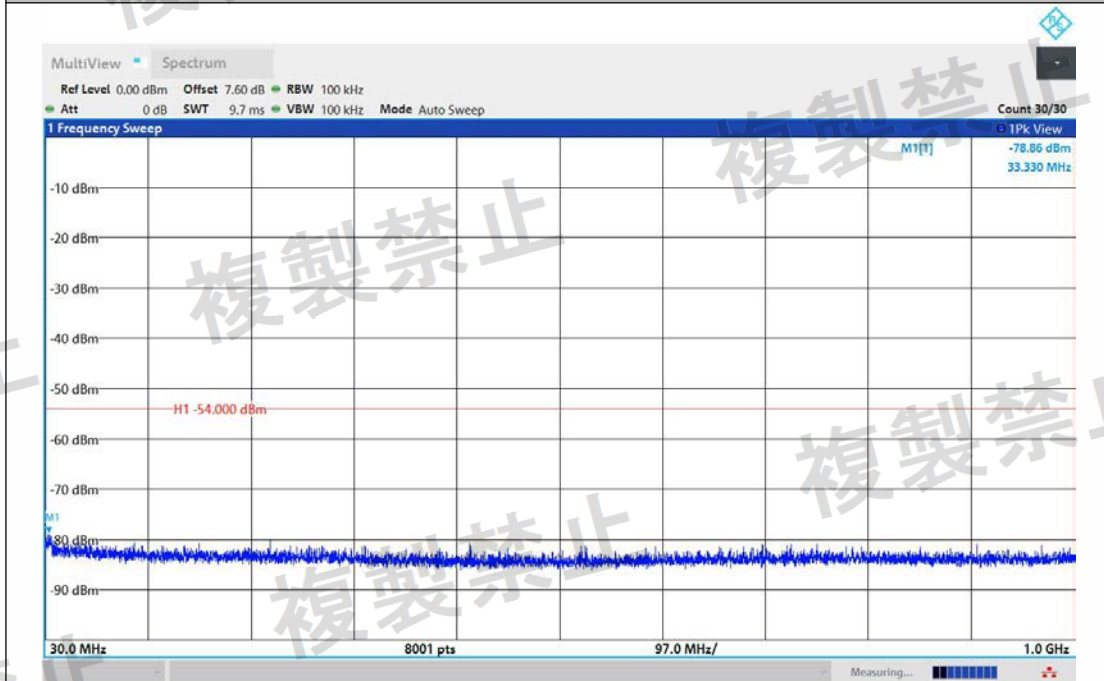


NTNV-11AC20MIMO-Ant2-5240-30~1000-PASS

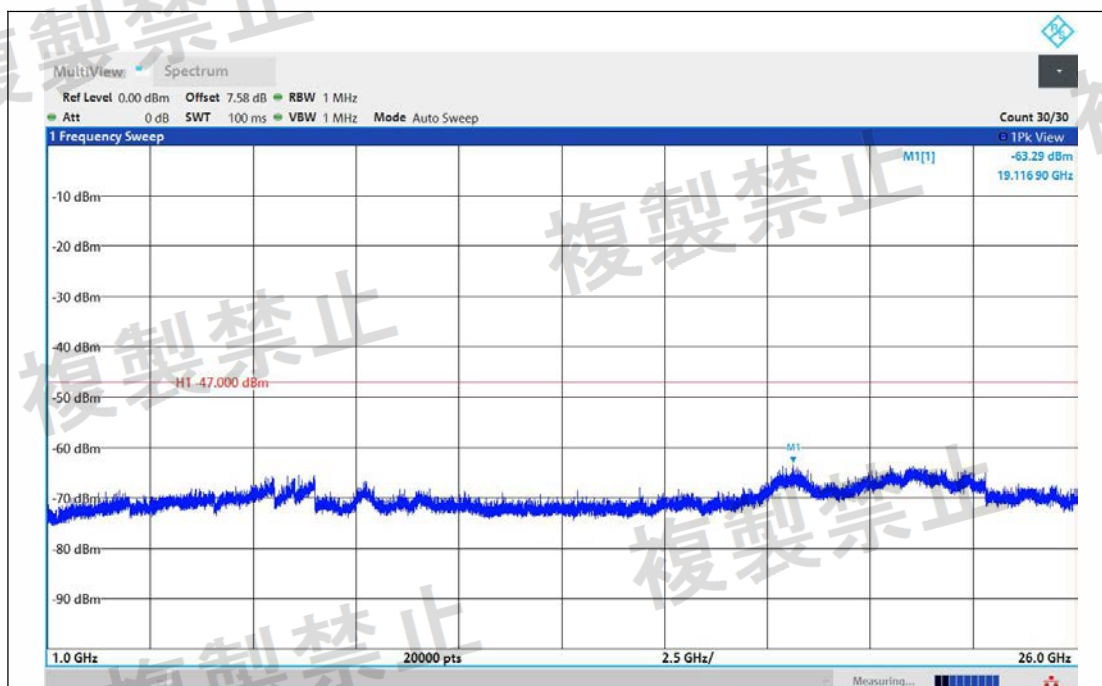


NTNV-11AC20MIMO-Ant1-5240-1000~26000-PASS

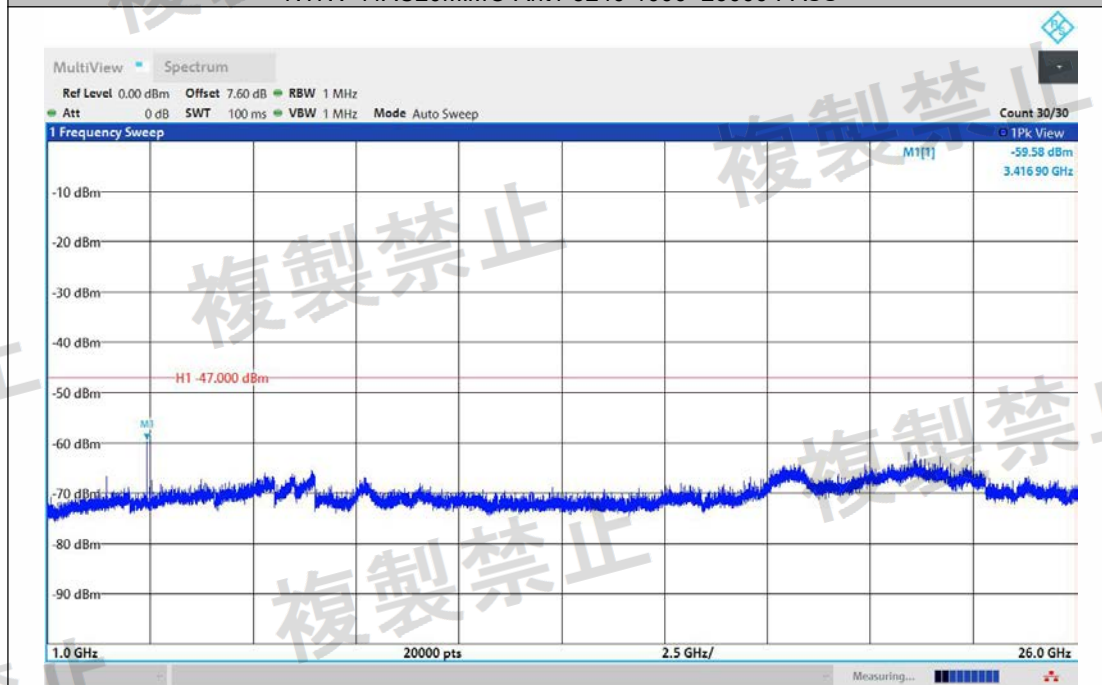


NTNV-11AC20MIMO-Ant2-5240-1000~26000-PASS

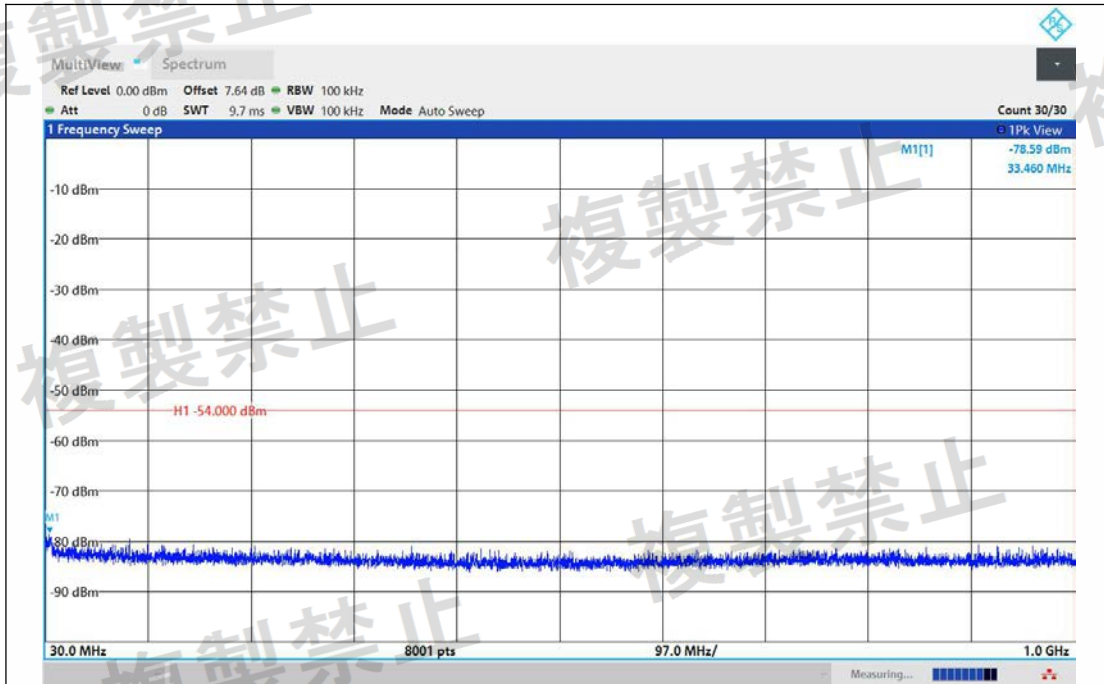


NTNV-11AC20MIMO-Ant1-5260-30~1000-PASS

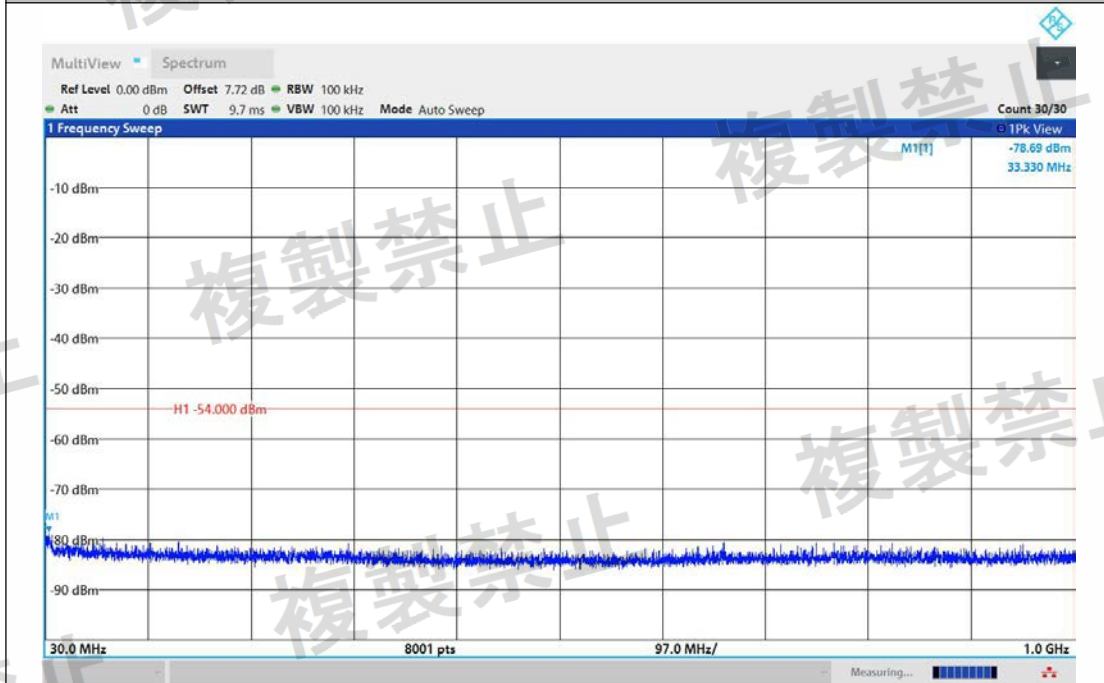


NTNV-11AC20MIMO-Ant2-5260-30~1000-PASS

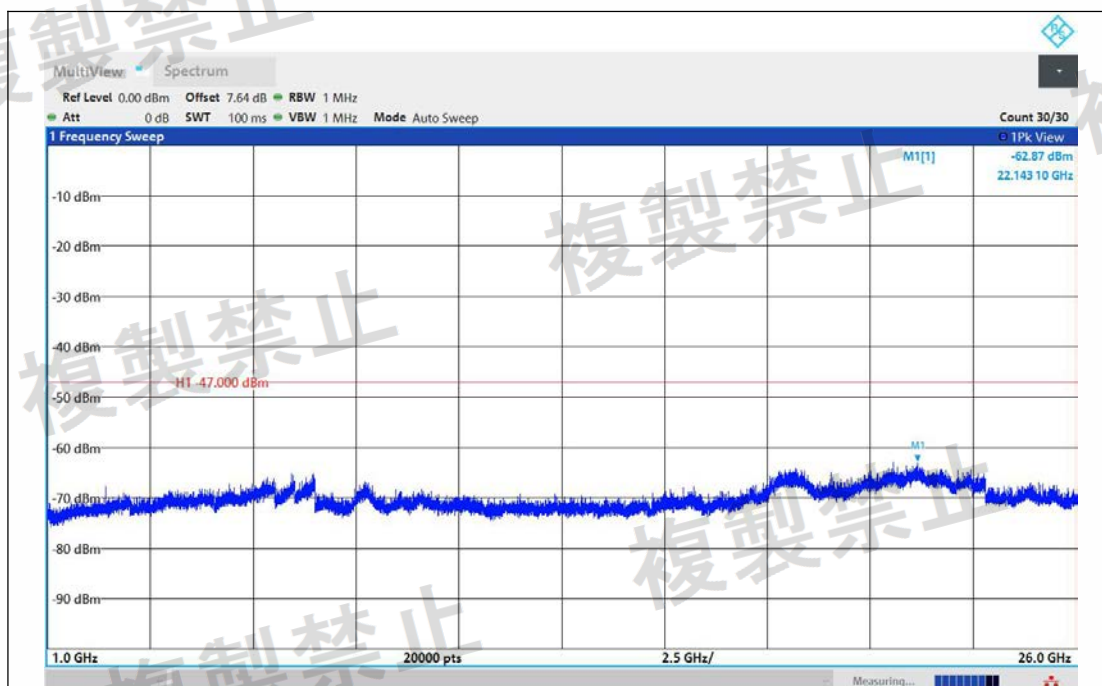


NTNV-11AC20MIMO-Ant1-5260-1000~26000-PASS

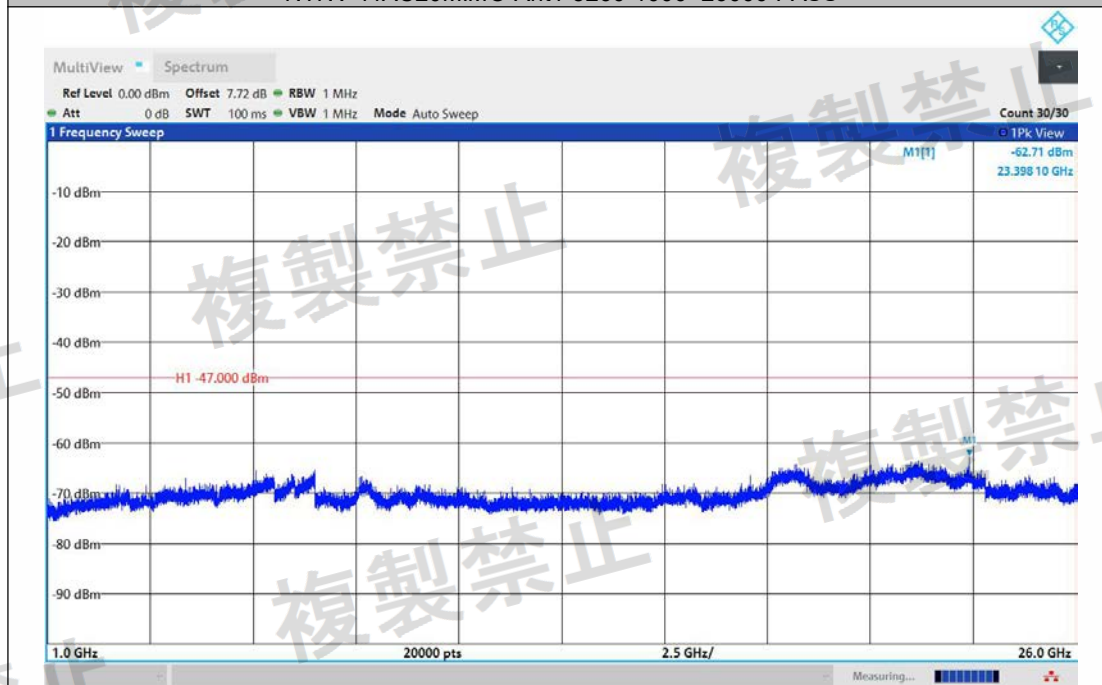



NTNV-11AC20MIMO-Ant2-5260-1000~26000-PASS

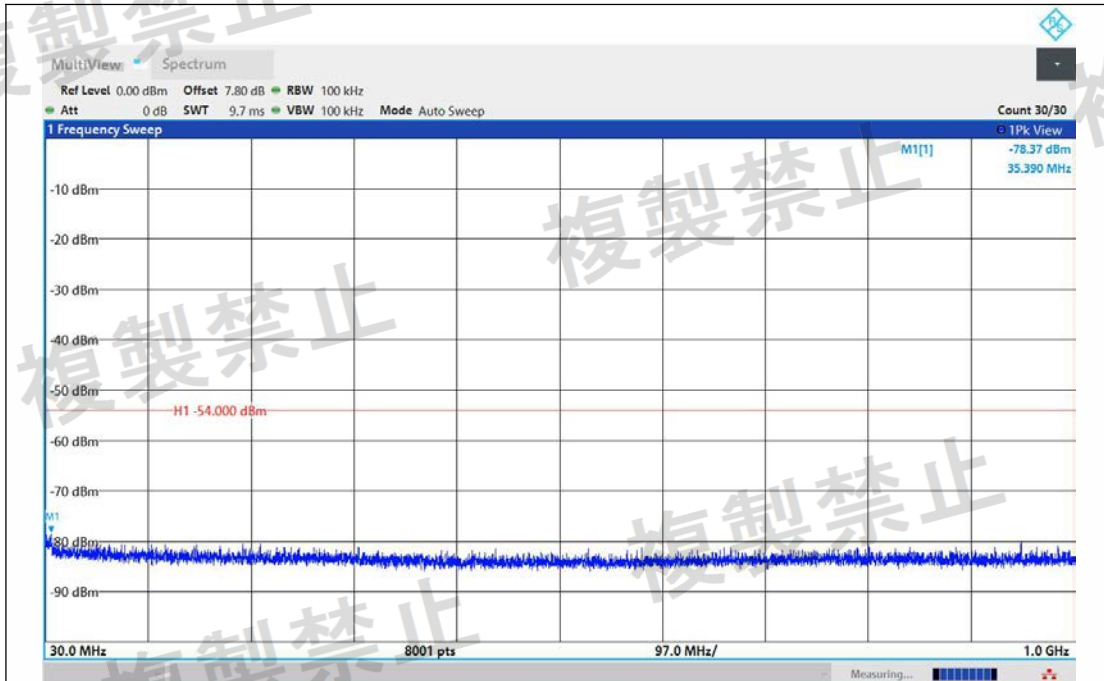


NTNV-11AC20MIMO-Ant1-5280-30~1000-PASS

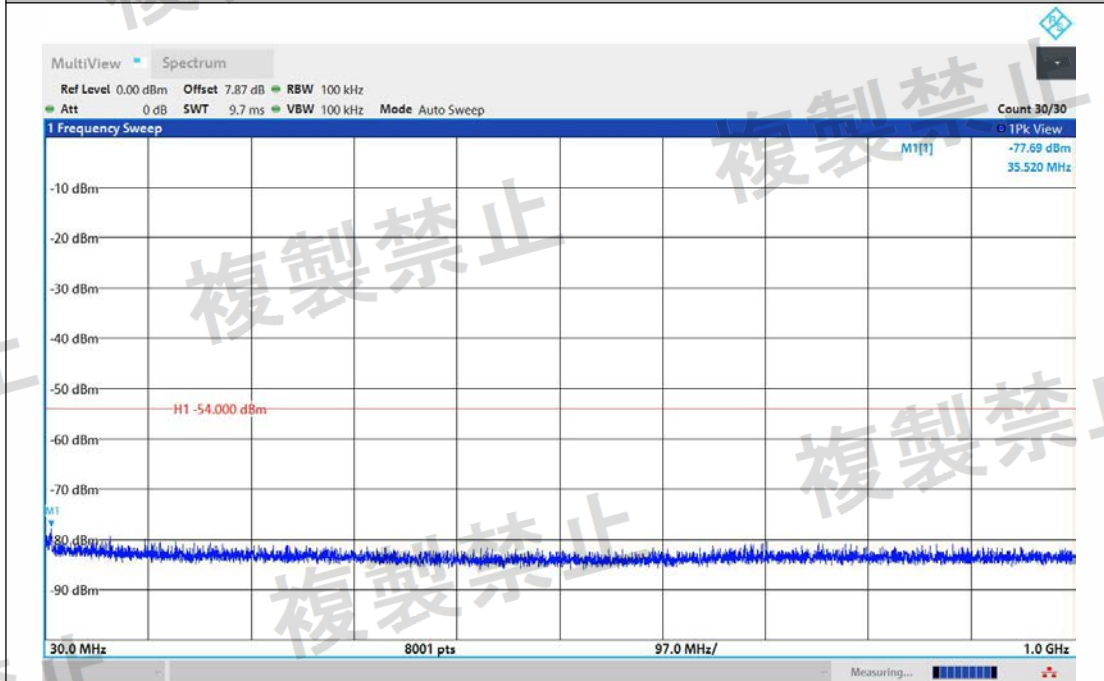


NTNV-11AC20MIMO-Ant2-5280-30~1000-PASS

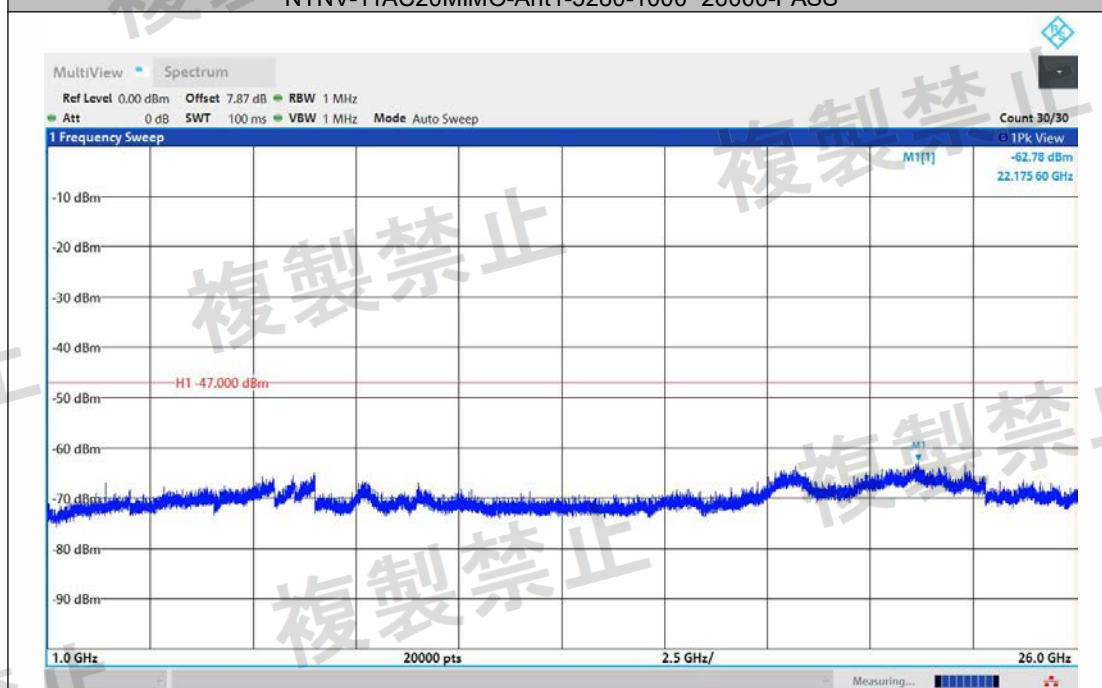
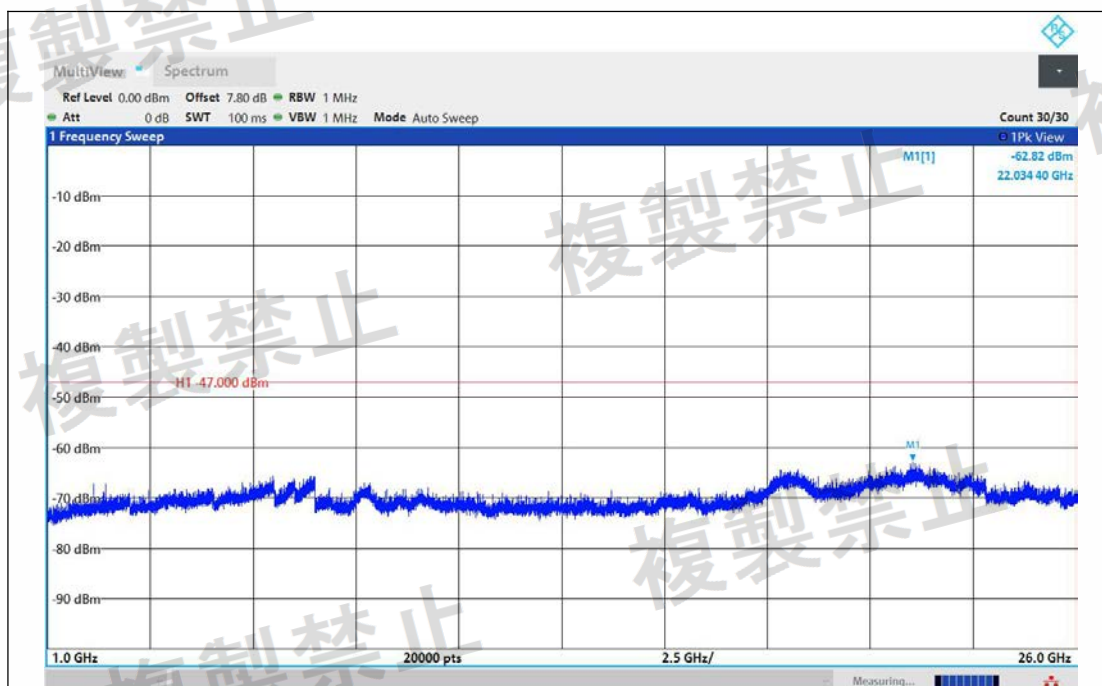


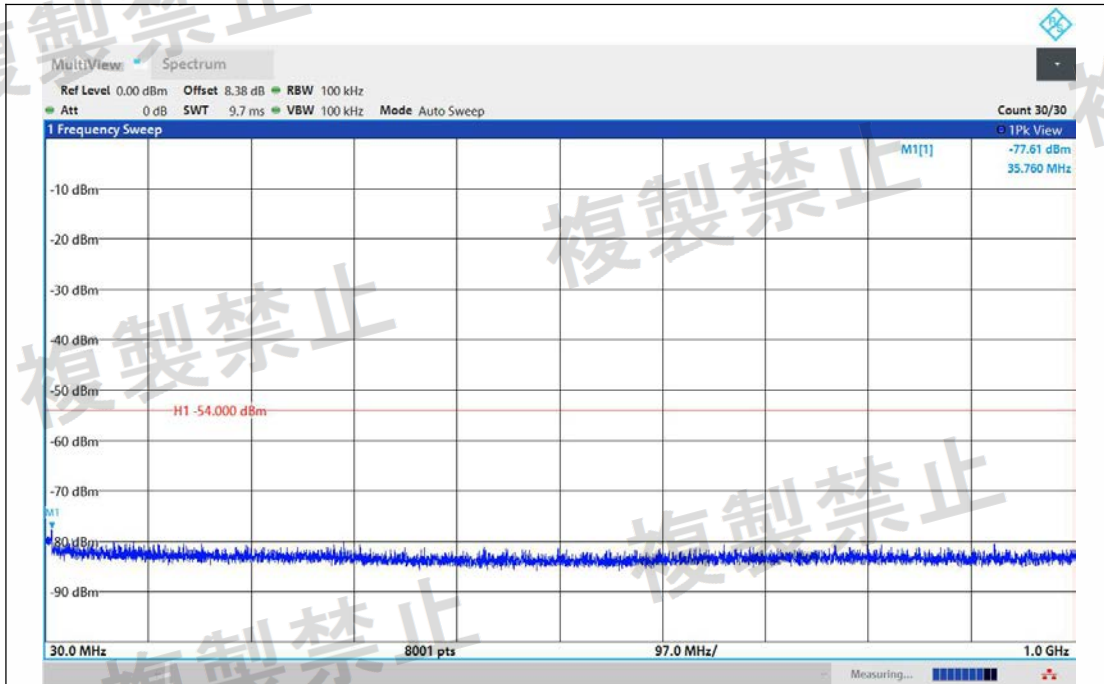


NTNV-11AC20MIMO-Ant1-5320-30~1000-PASS

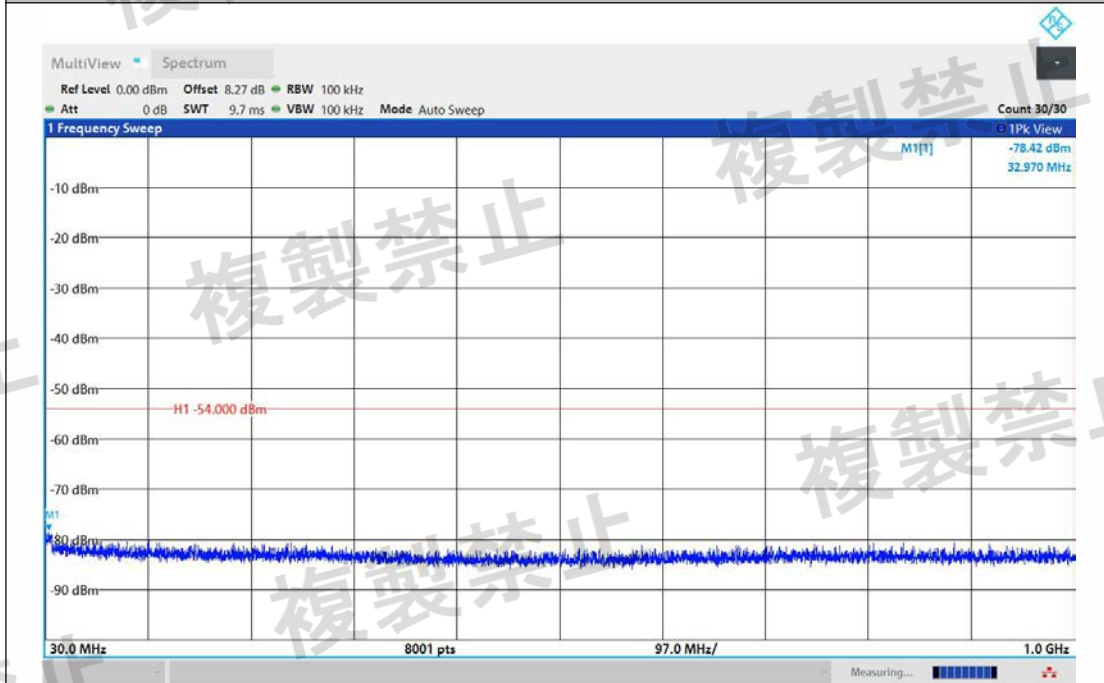


NTNV-11AC20MIMO-Ant2-5320-30~1000-PASS

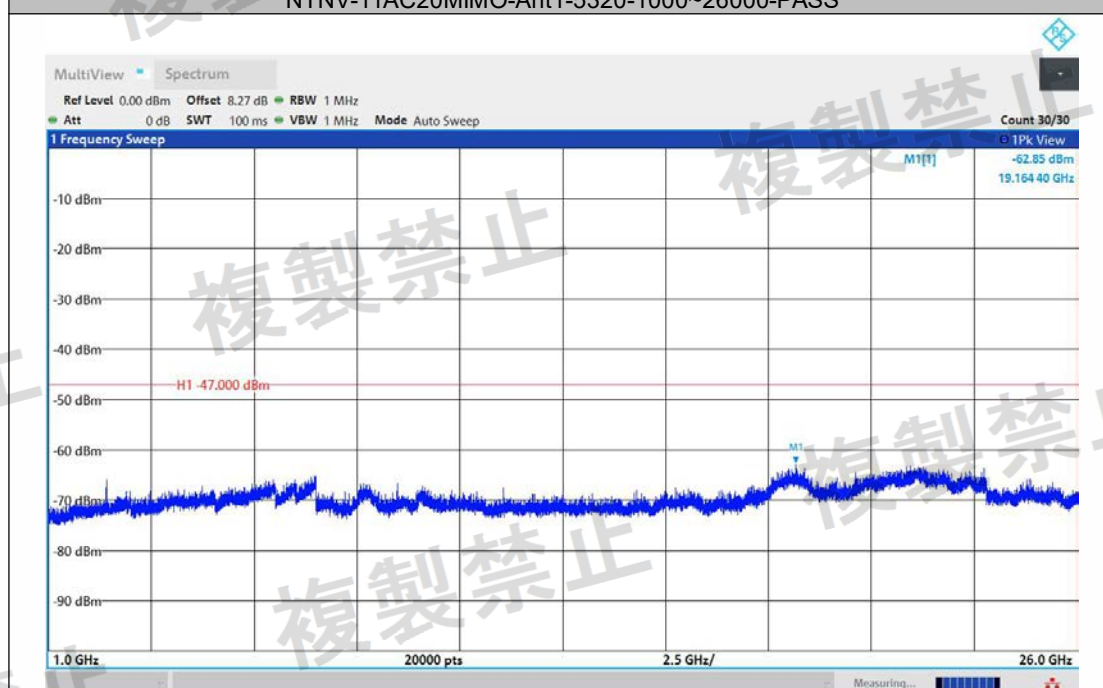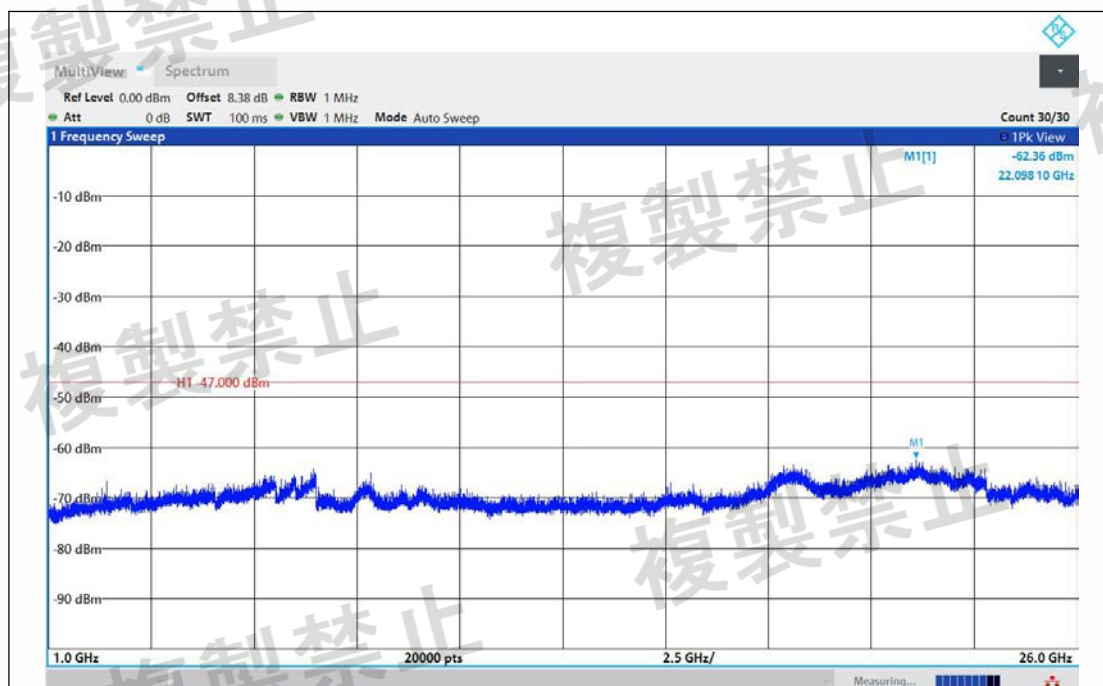


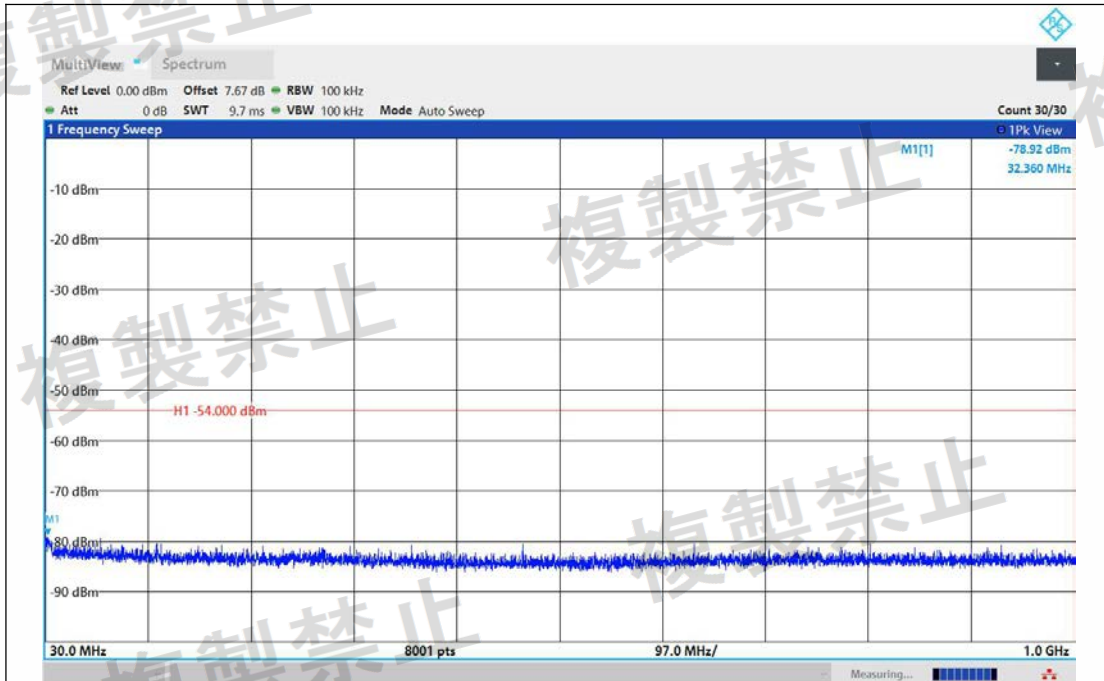


NTNV-11AC20MIMO-Ant1-5500-30~1000-PASS

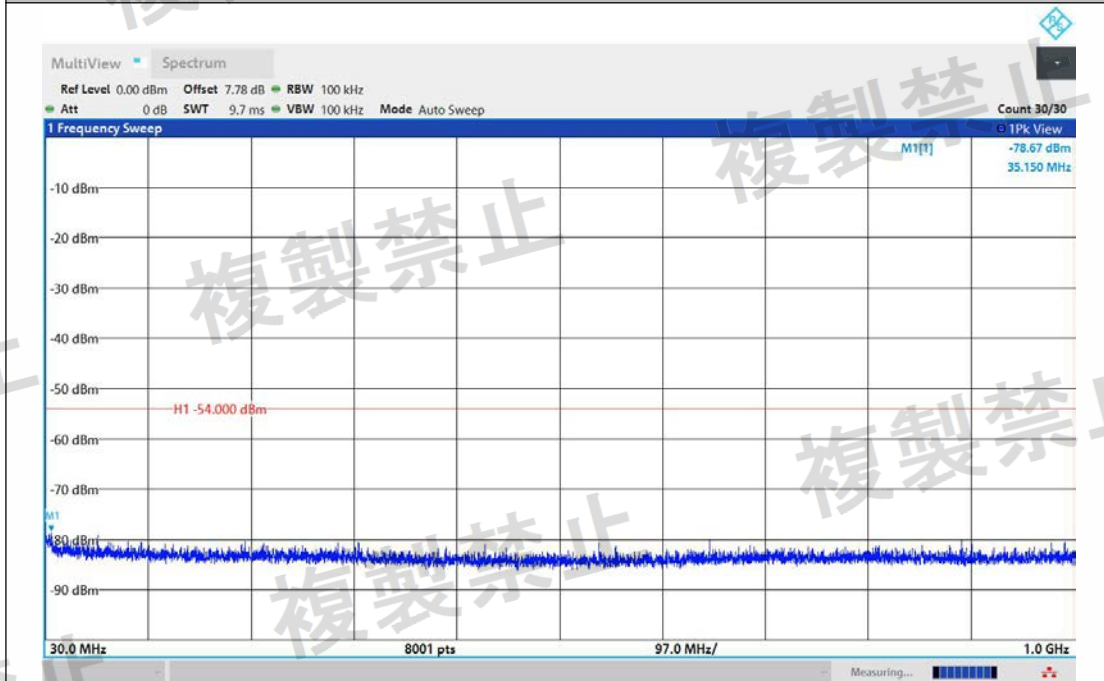


NTNV-11AC20MIMO-Ant2-5500-30~1000-PASS

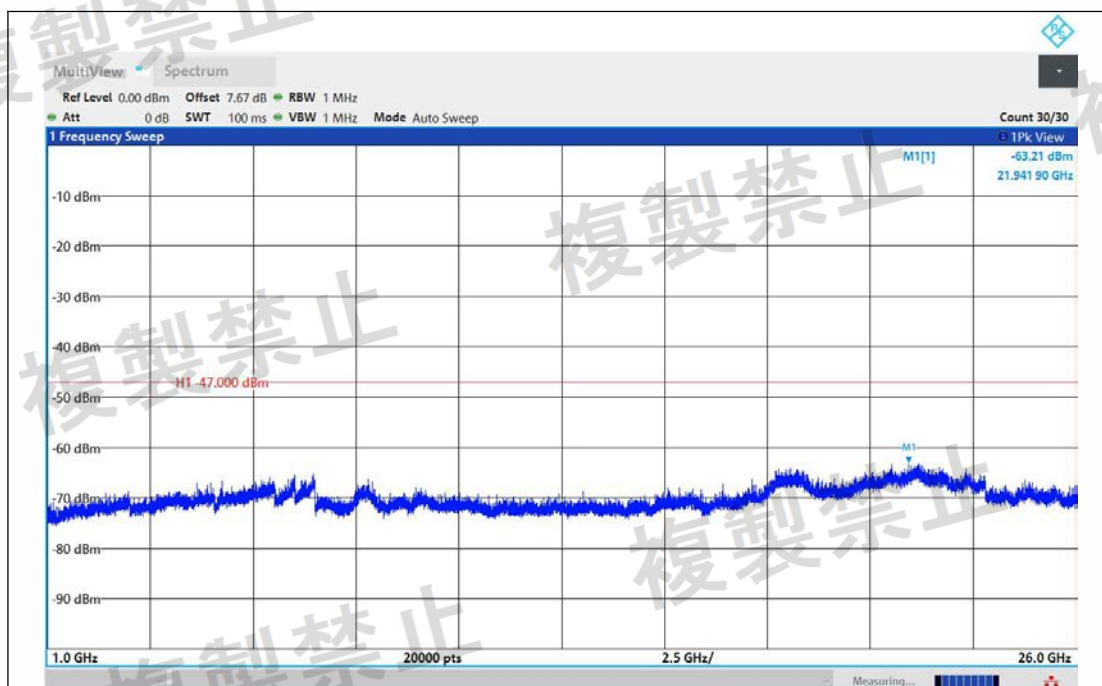


NTNV-11AC20MIMO-Ant1-5500-1000~26000-PASS

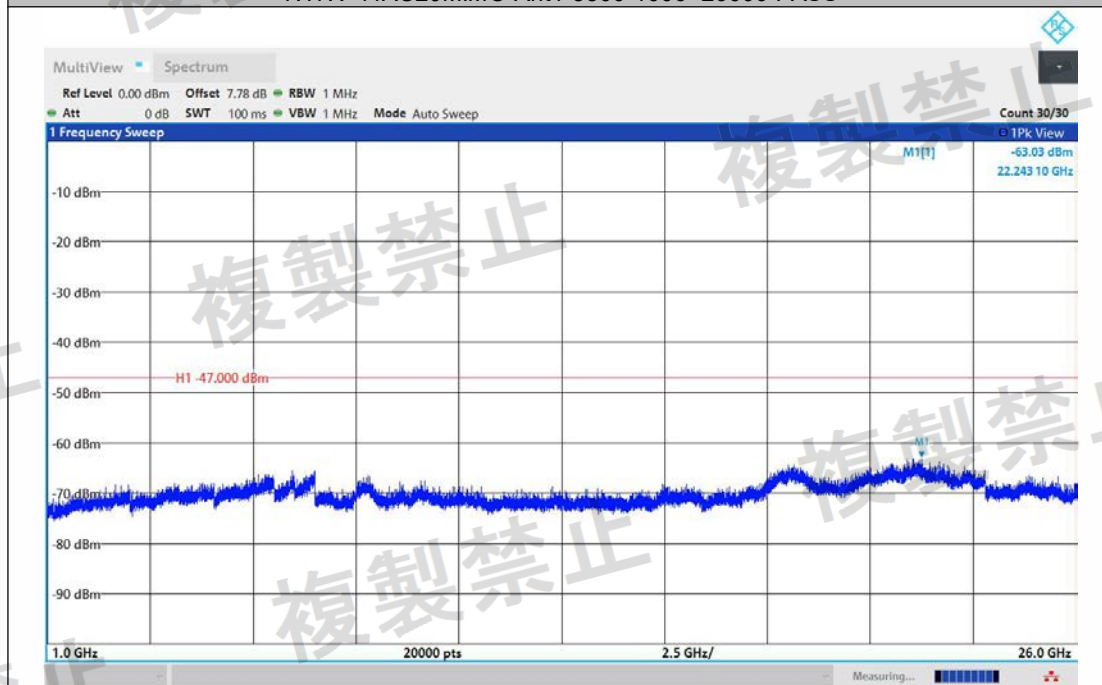


NTNV-11AC20MIMO-Ant2-5500-1000~26000-PASS

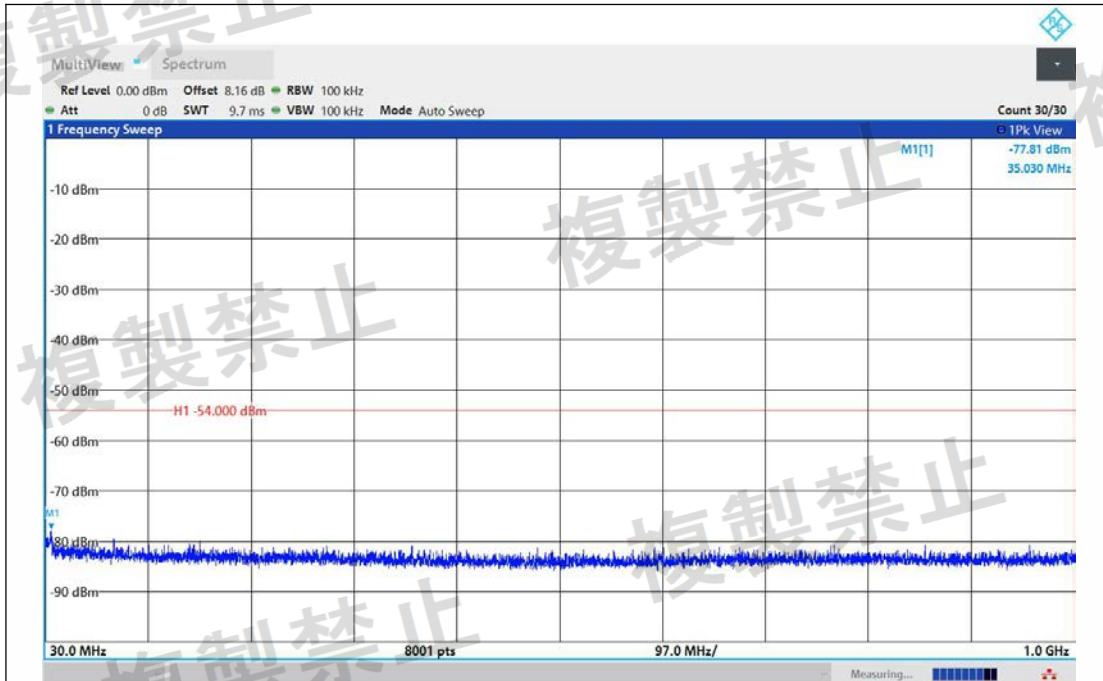


NTNV-11AC20MIMO-Ant1-5580-30~1000-PASS

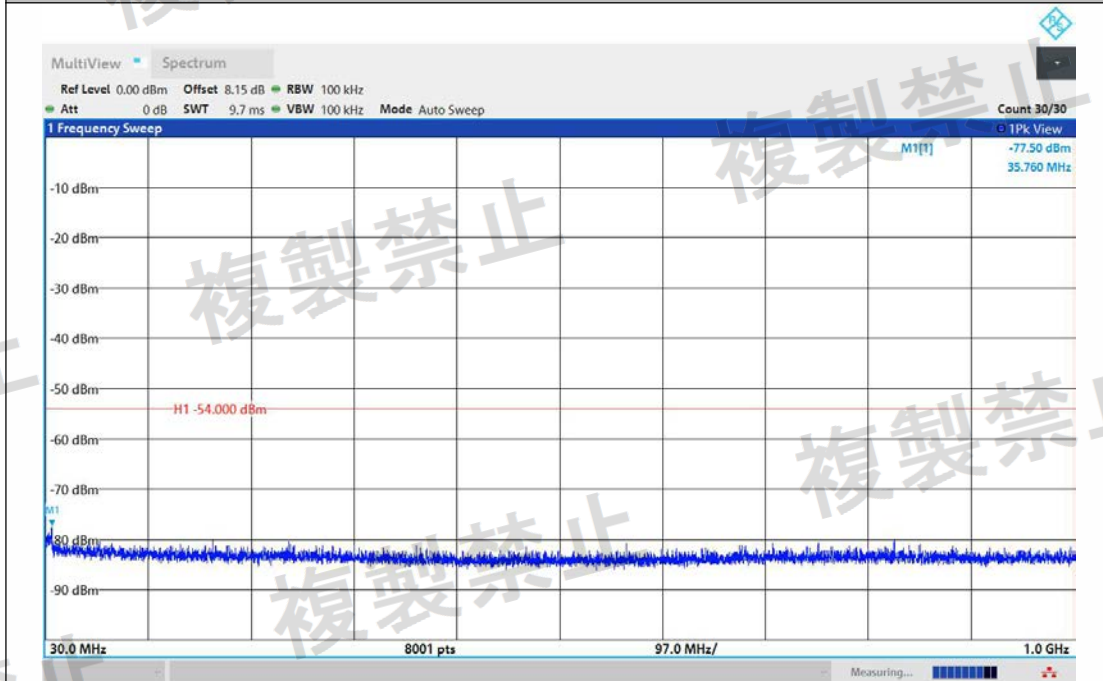


NTNV-11AC20MIMO-Ant2-5580-30~1000-PASS

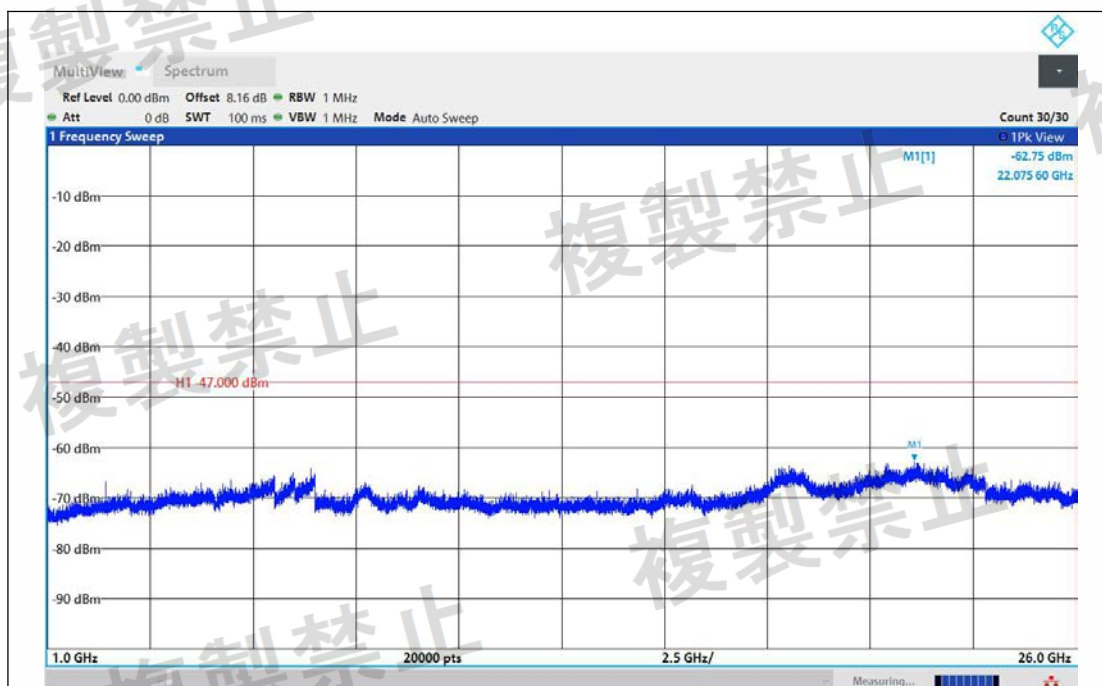


NTNV-11AC20MIMO-Ant1-5580-1000~26000-PASS

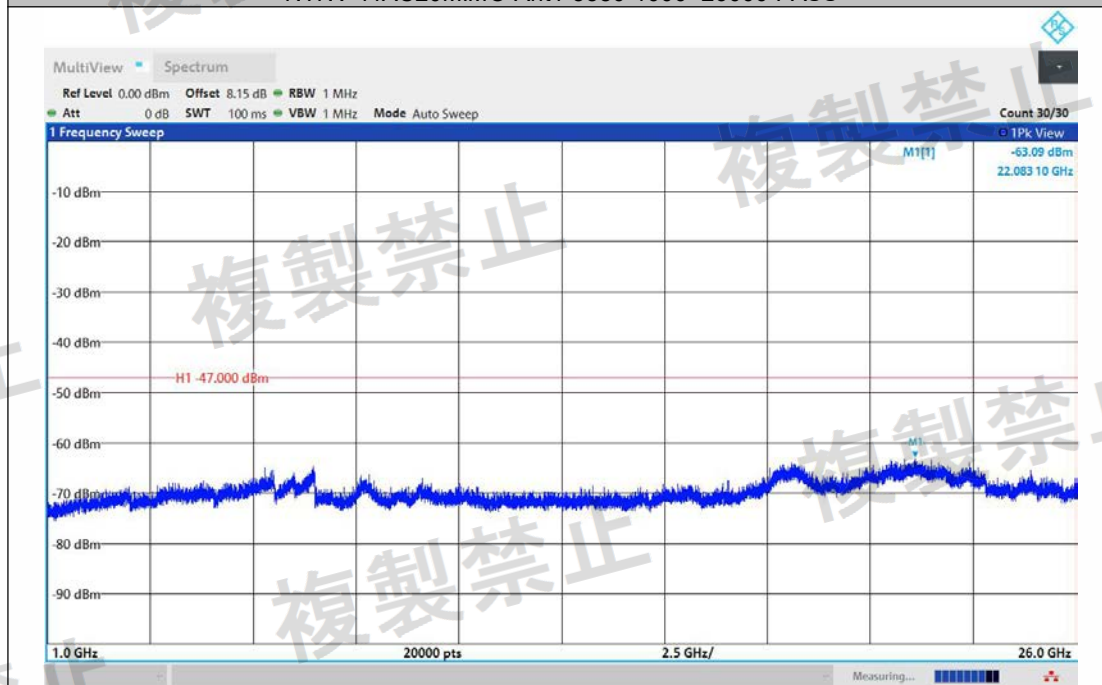


NTNV-11AC20MIMO-Ant2-5580-1000~26000-PASS

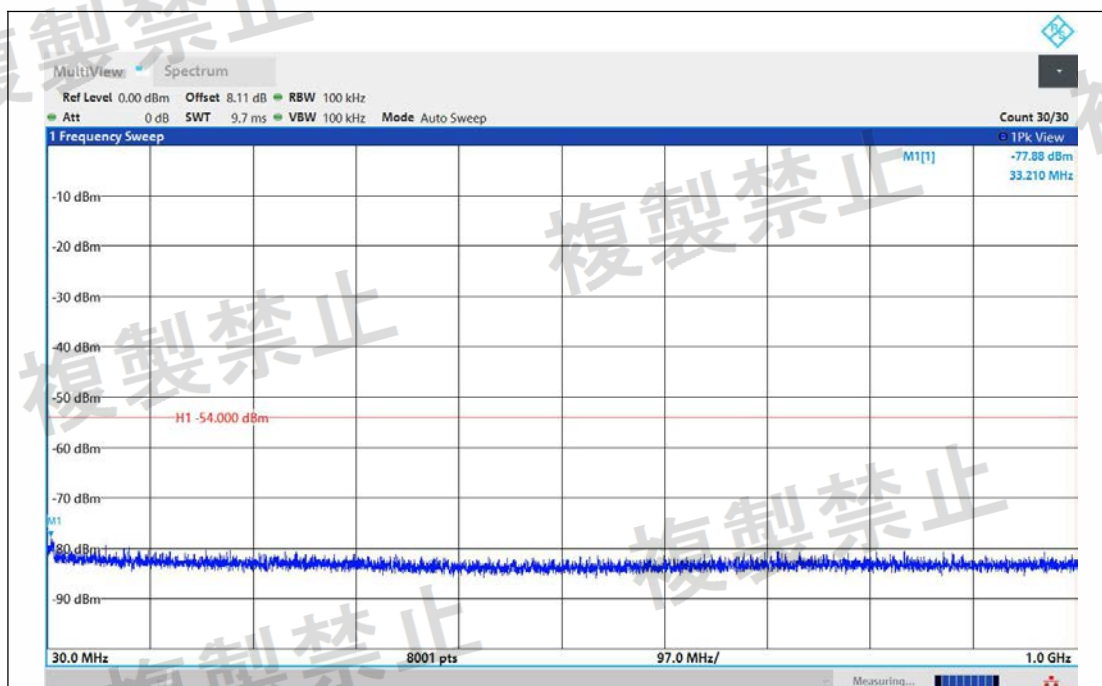


NTNV-11AC20MIMO-Ant1-5700-30~1000-PASS

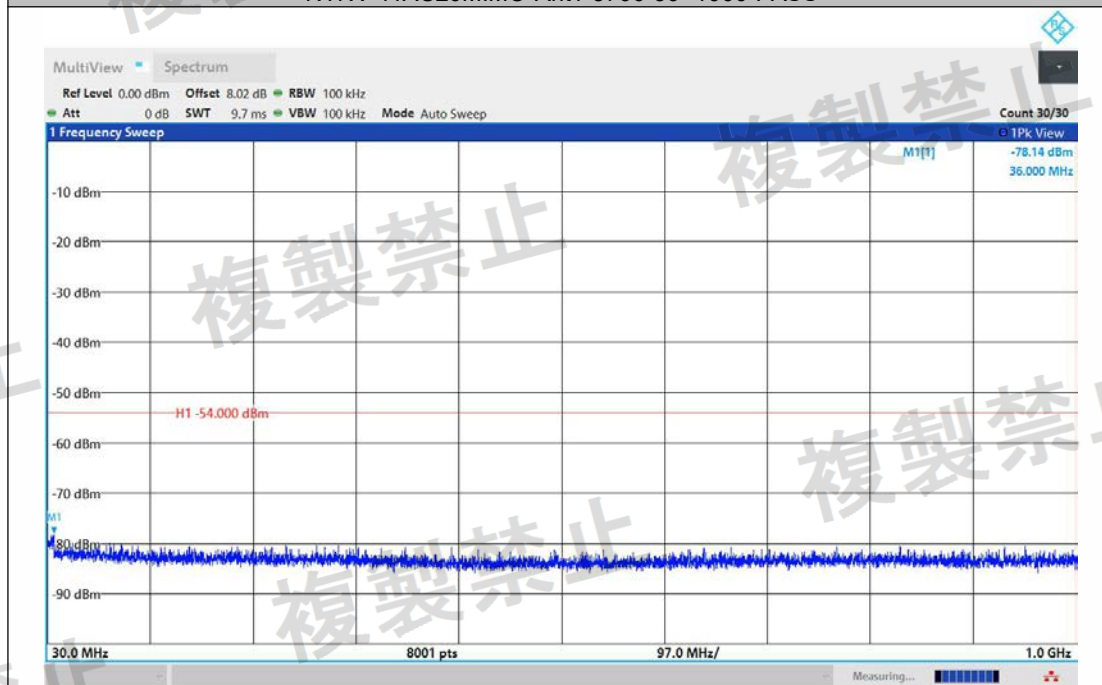


NTNV-11AC20MIMO-Ant2-5700-30~1000-PASS

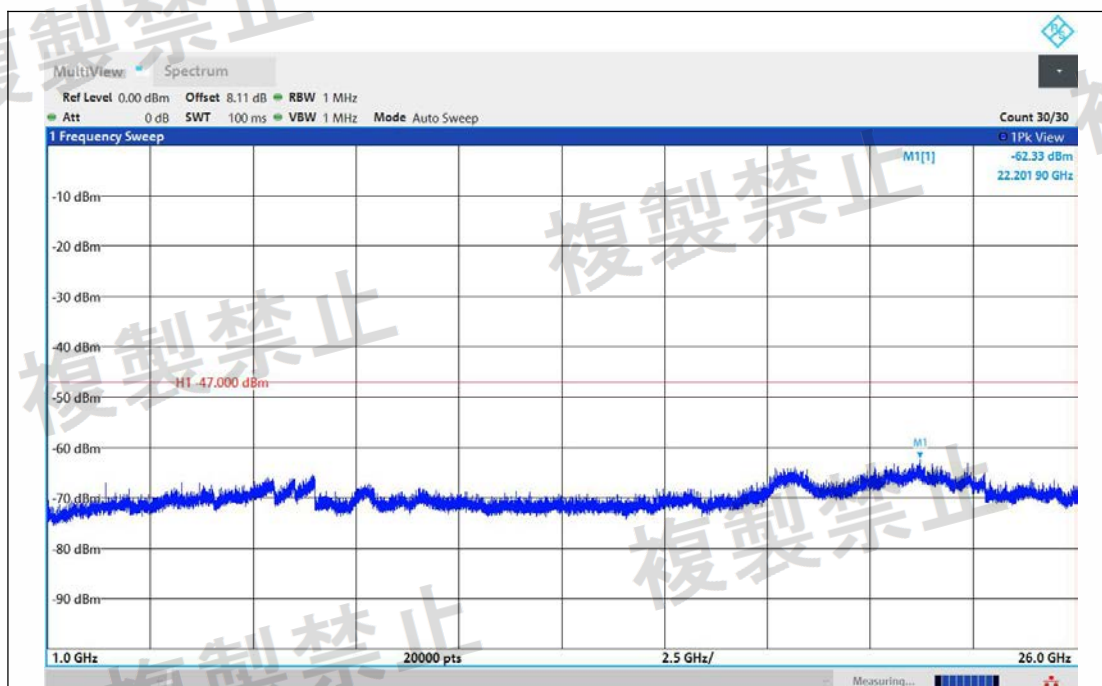


NTVN-11AC20MIMO-Ant1-5700-1000~26000-PASS

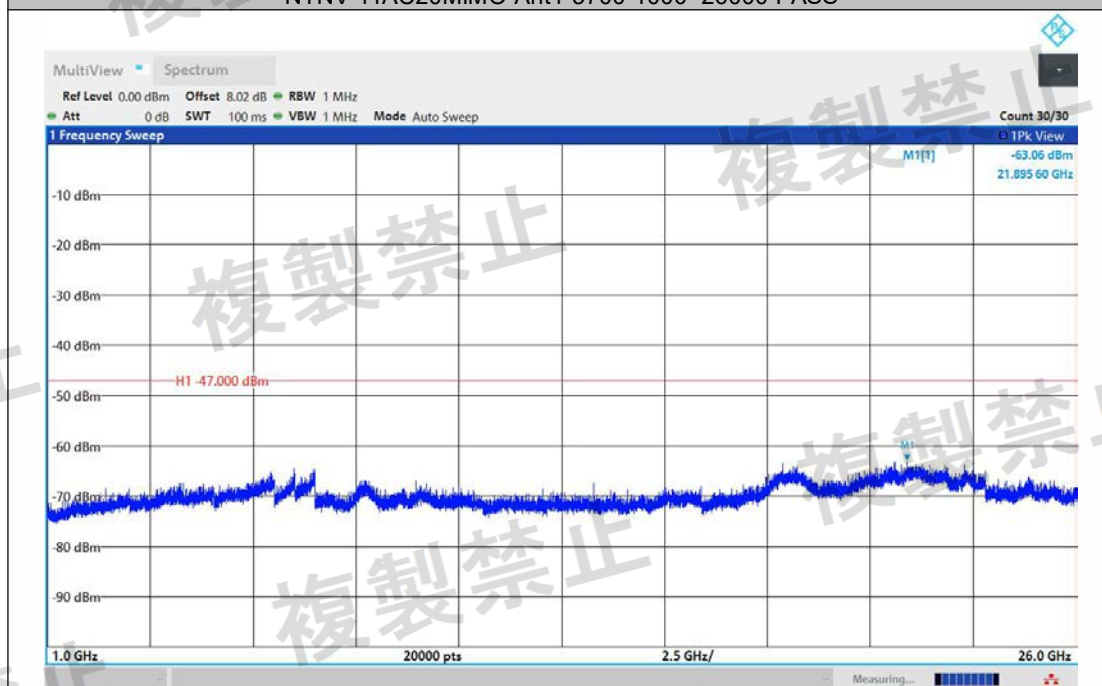


NTVN-11AC20MIMO-Ant2-5700-1000~26000-PASS

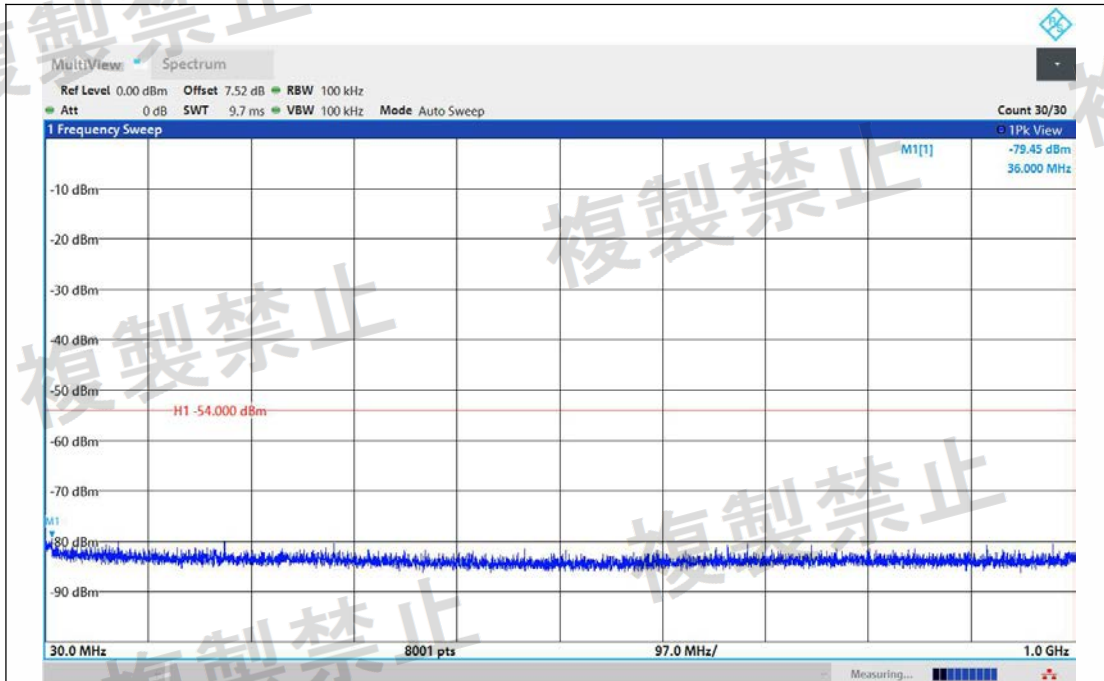


NTNV-11AC40MIMO-Ant1-5190-30~1000-PASS

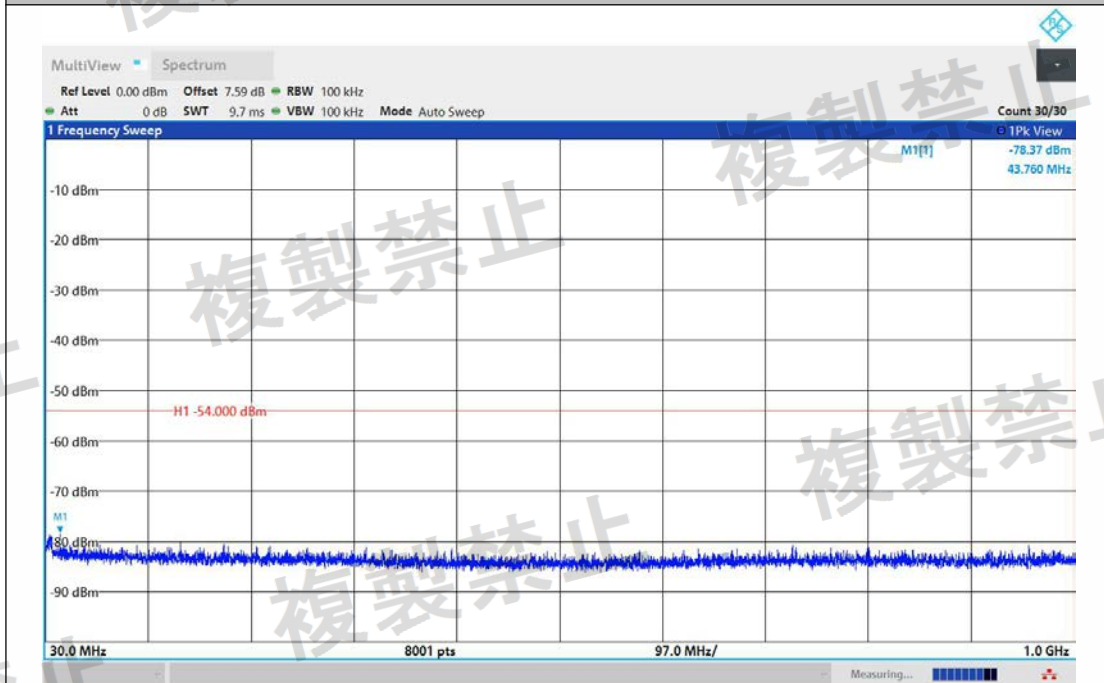


NTNV-11AC40MIMO-Ant2-5190-30~1000-PASS

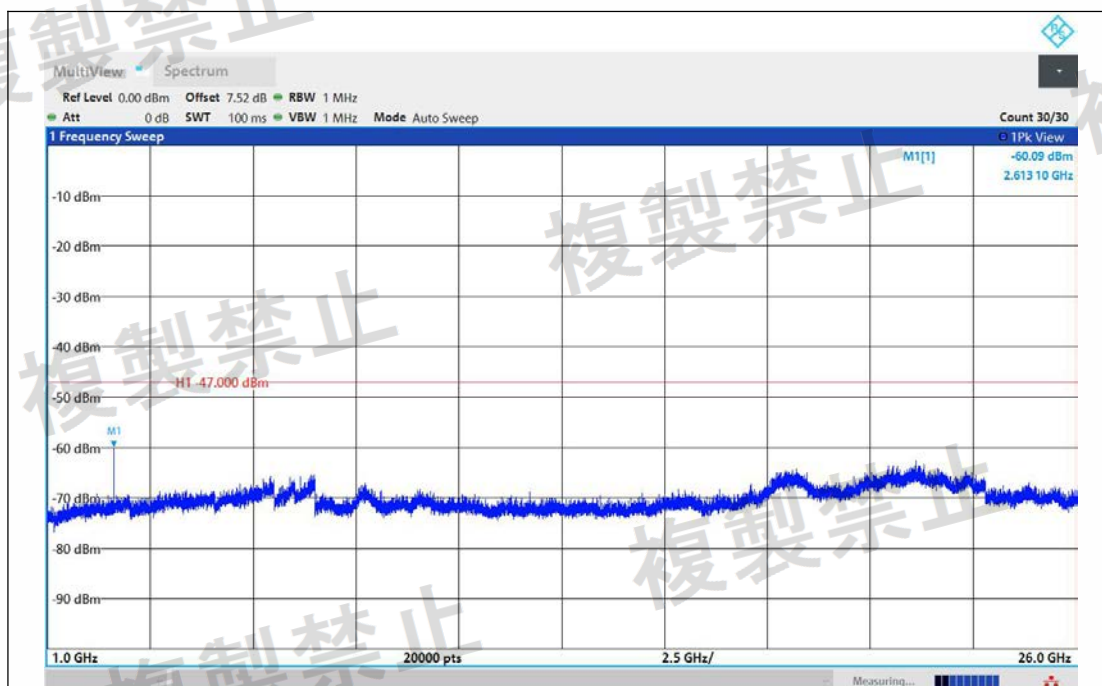


NTNV-11AC40MIMO-Ant1-5190-1000~26000-PASS

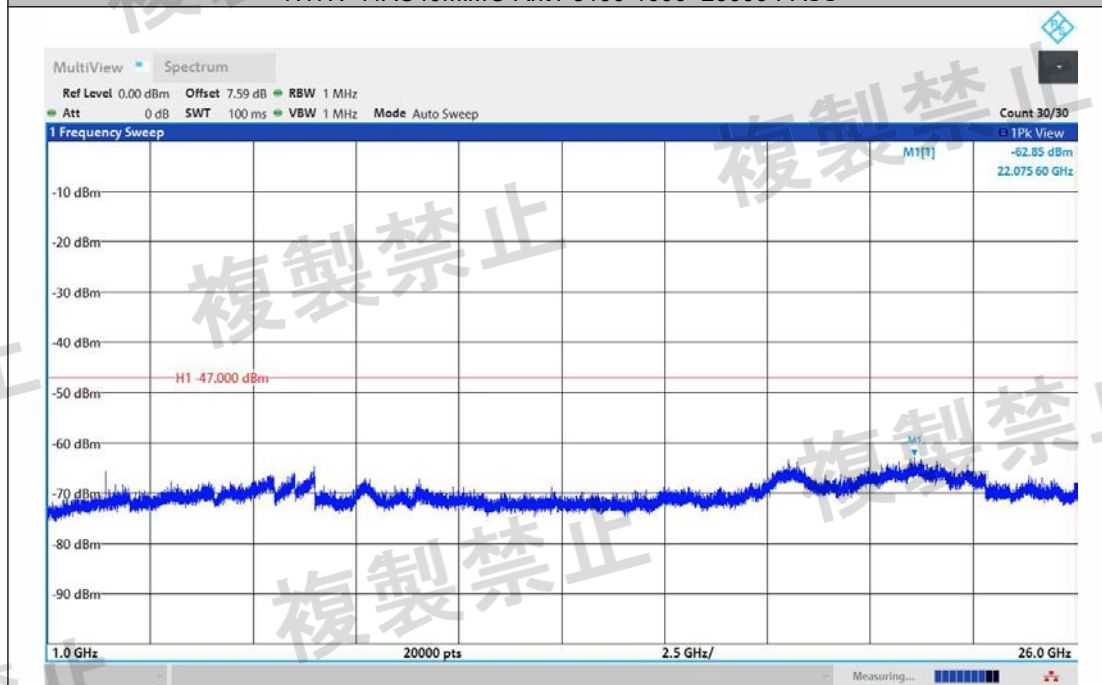


NTNV-11AC40MIMO-Ant2-5190-1000~26000-PASS

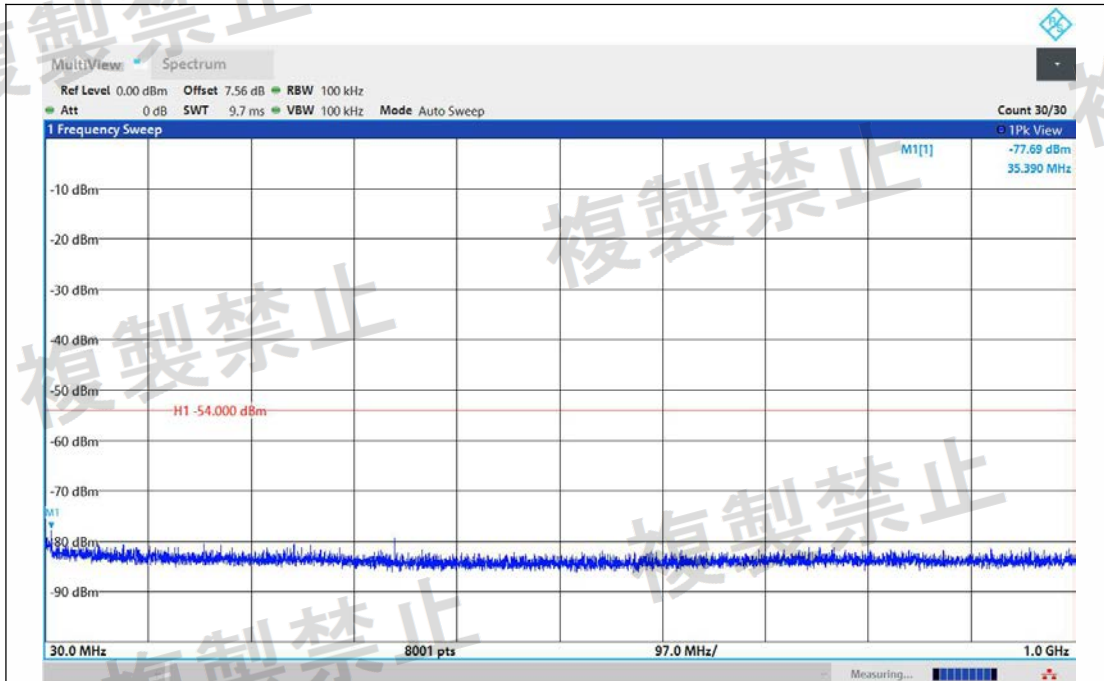


NTNV-11AC40MIMO-Ant1-5230-30~1000-PASS

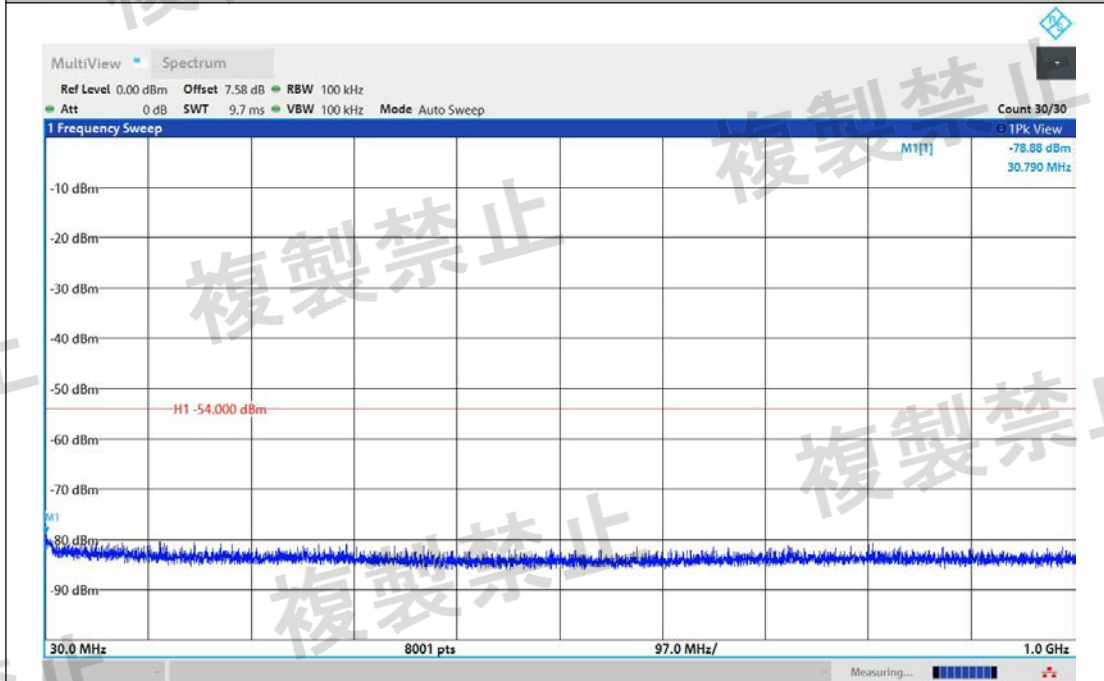


NTNV-11AC40MIMO-Ant2-5230-30~1000-PASS

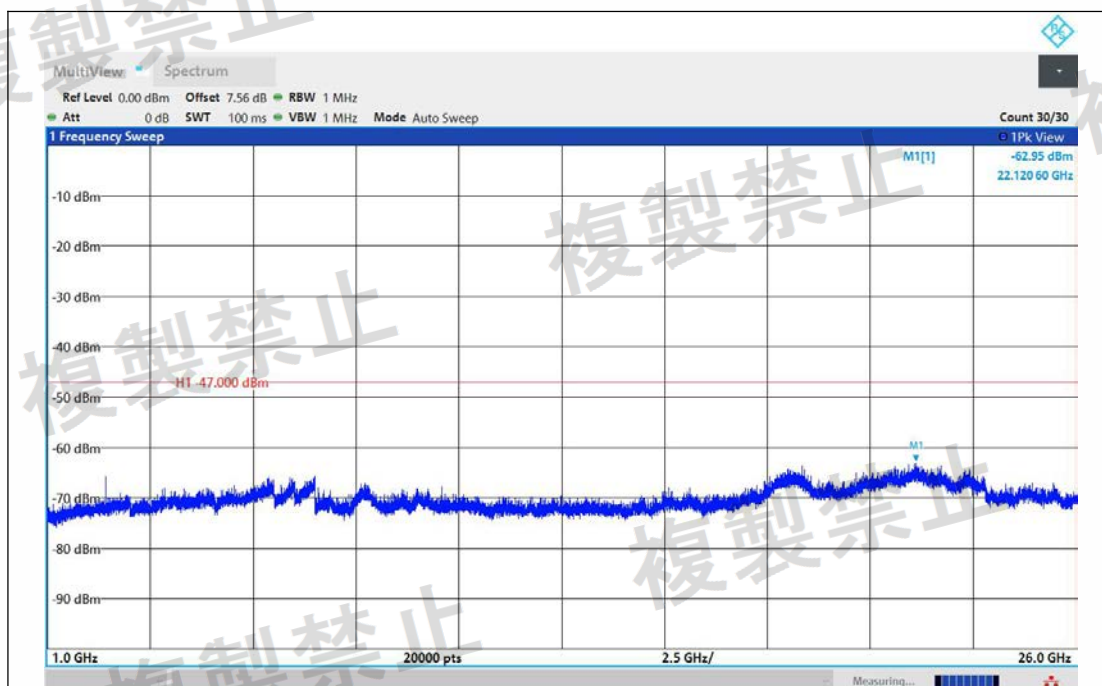


NTVN-11AC40MIMO-Ant1-5230-1000~26000-PASS

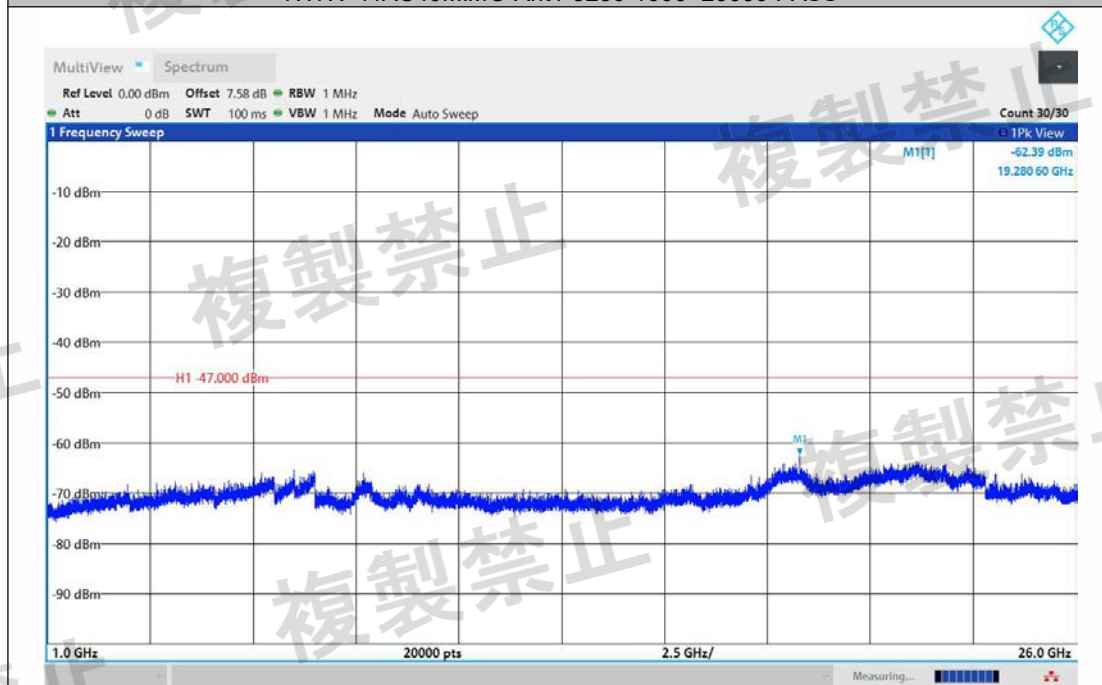


NTVN-11AC40MIMO-Ant2-5230-1000~26000-PASS

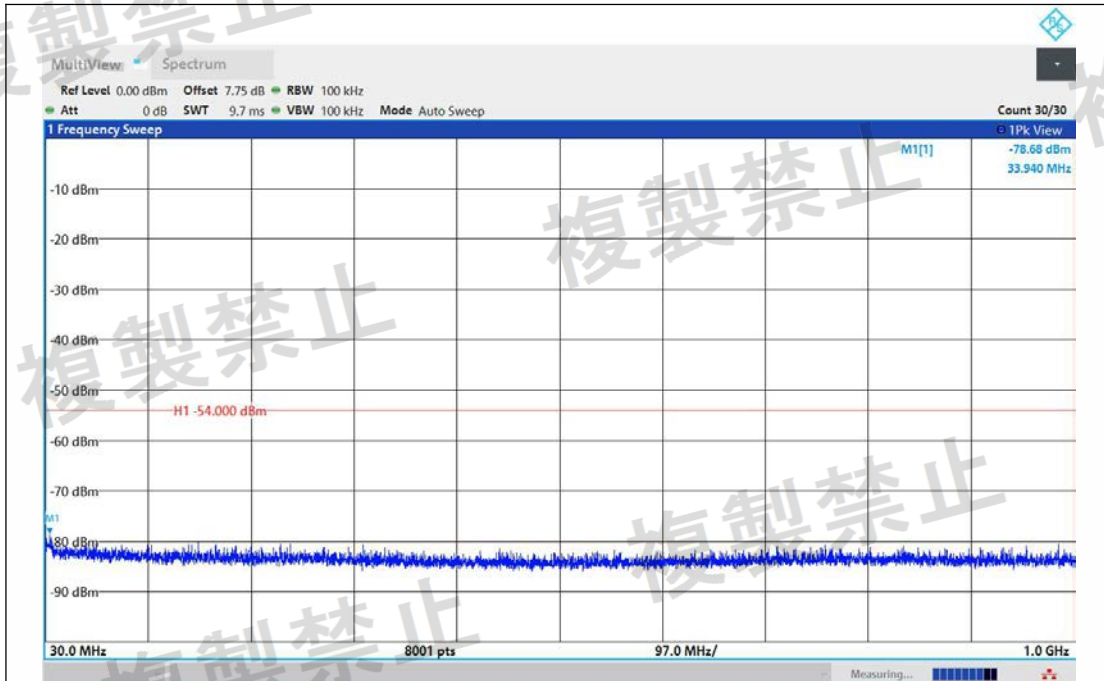


NTNV-11AC40MIMO-Ant1-5270-30~1000-PASS

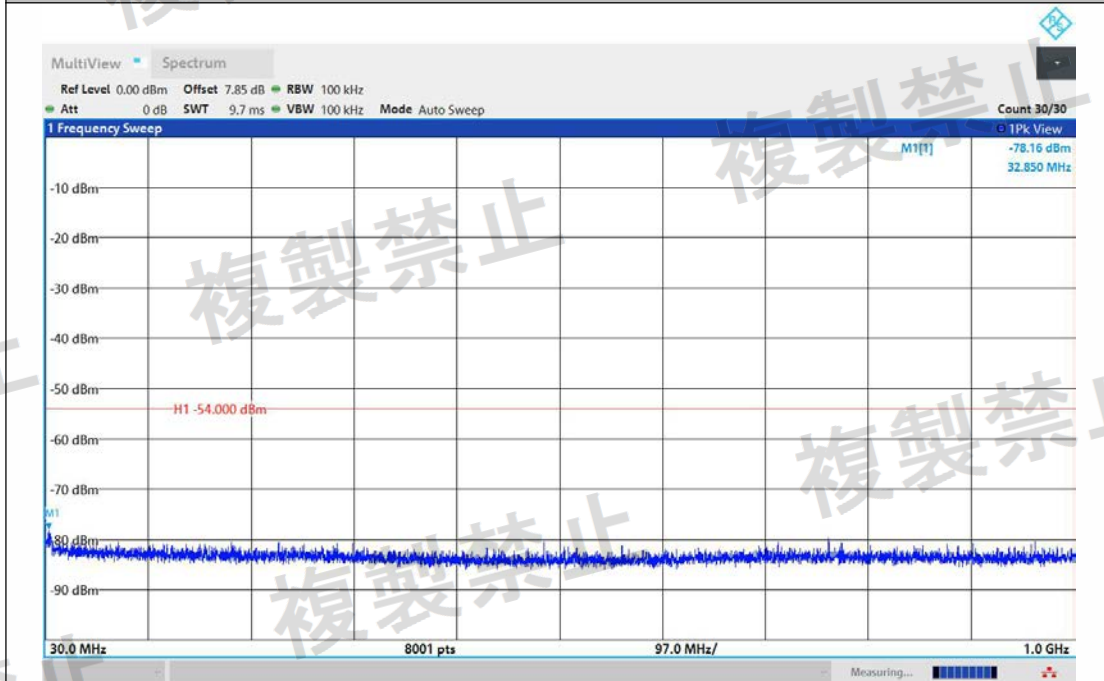


NTNV-11AC40MIMO-Ant2-5270-30~1000-PASS

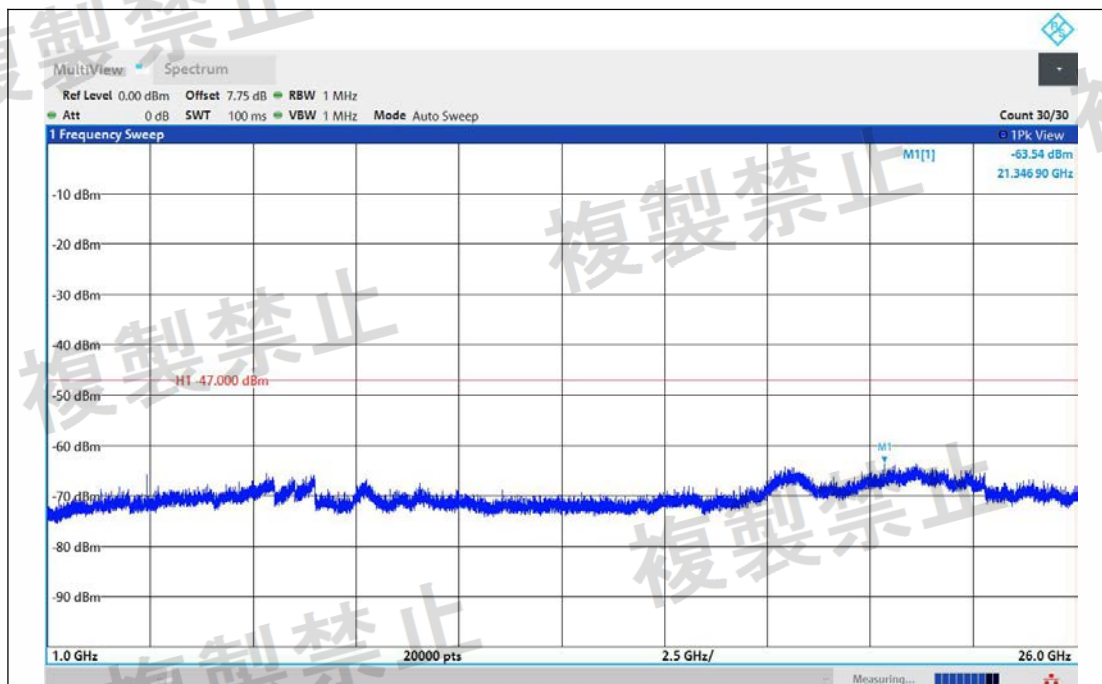


NTNV-11AC40MIMO-Ant1-5270-1000~26000-PASS

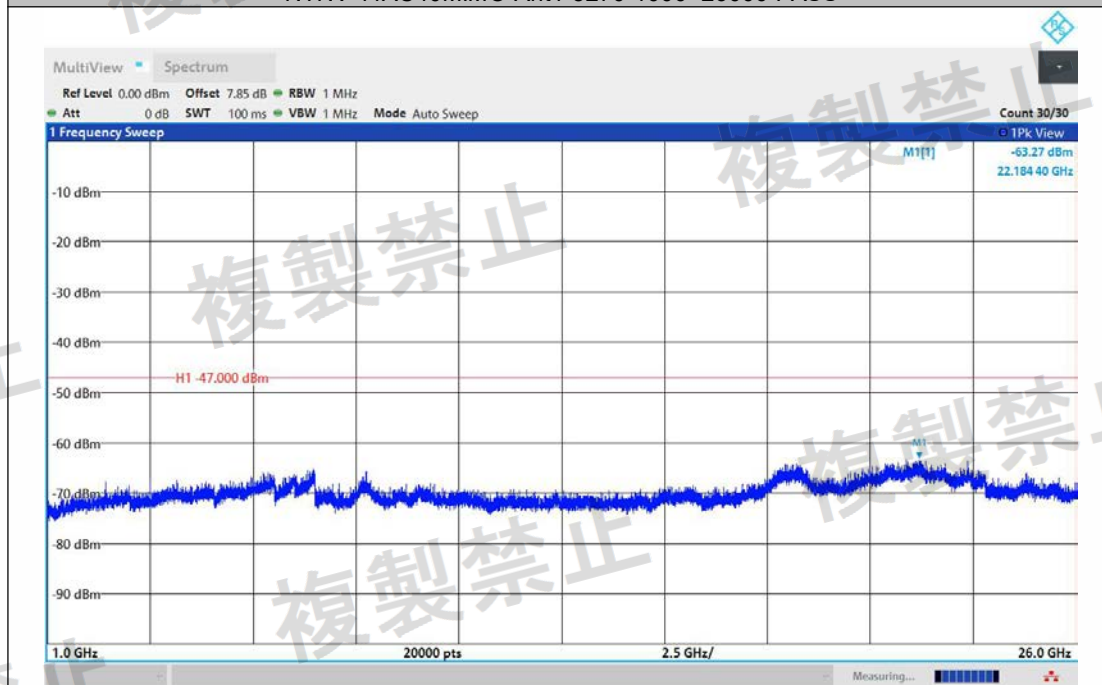


NTNV-11AC40MIMO-Ant2-5270-1000~26000-PASS

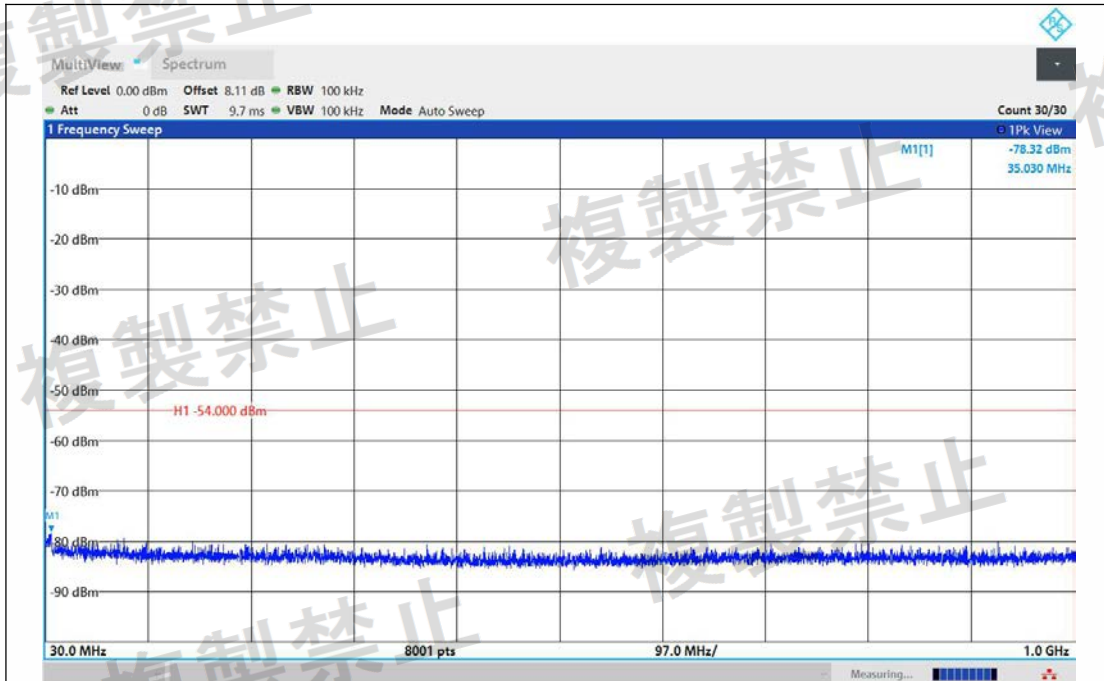


NTNV-11AC40MIMO-Ant1-5310-30~1000-PASS

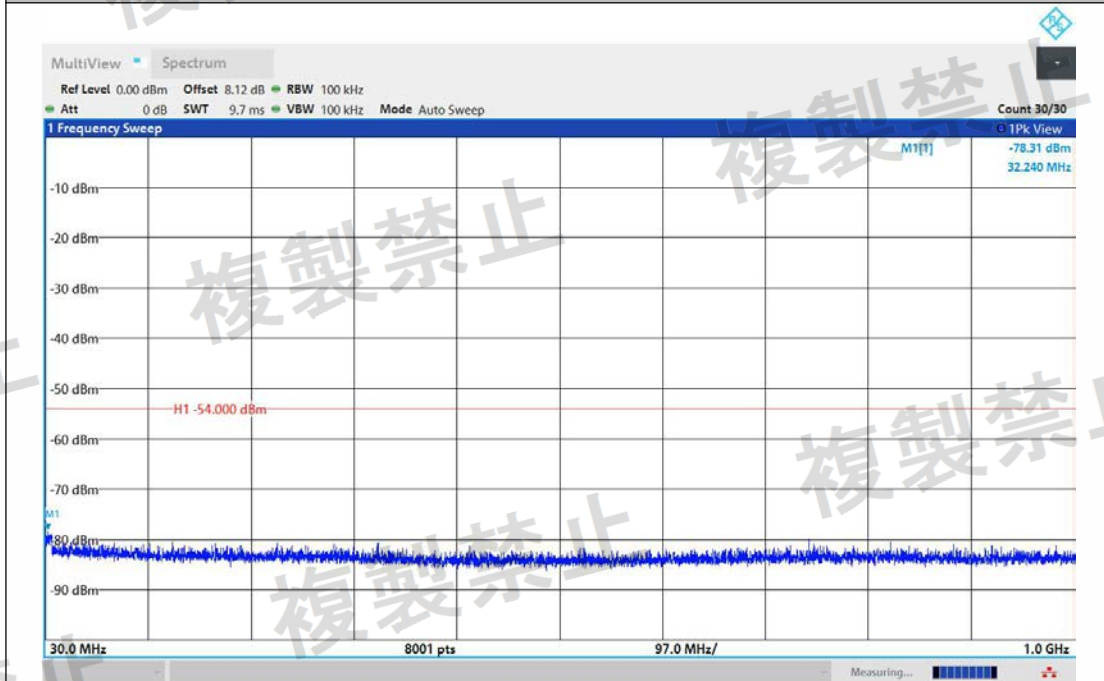


NTNV-11AC40MIMO-Ant2-5310-30~1000-PASS

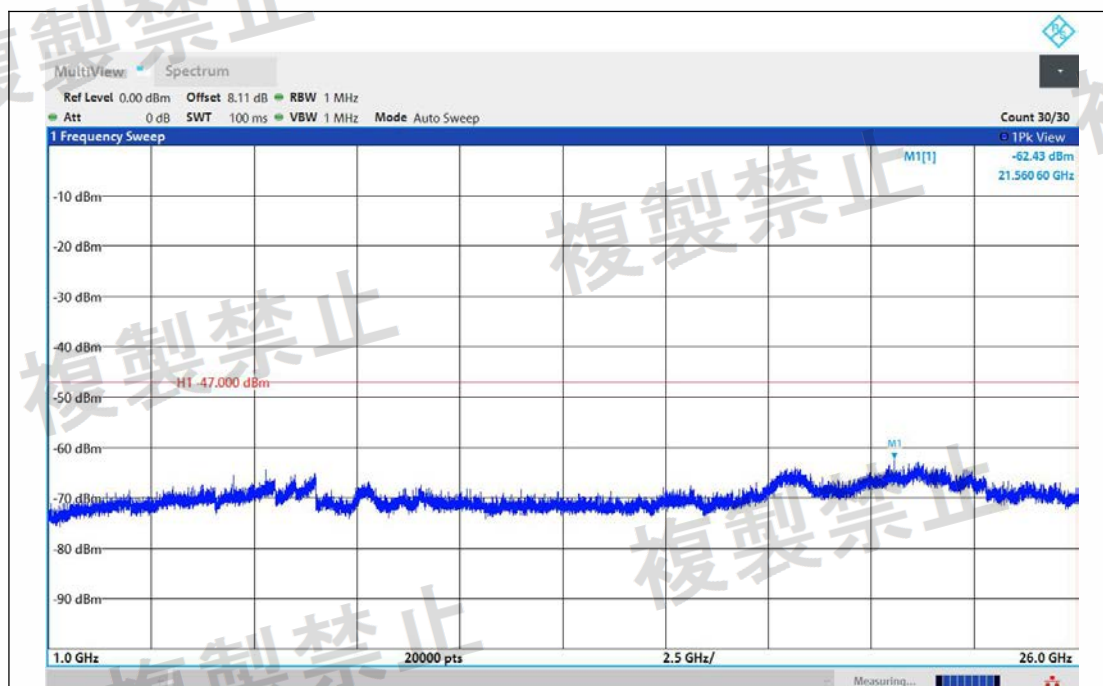


NTVN-11AC40MIMO-Ant1-5310-1000~26000-PASS

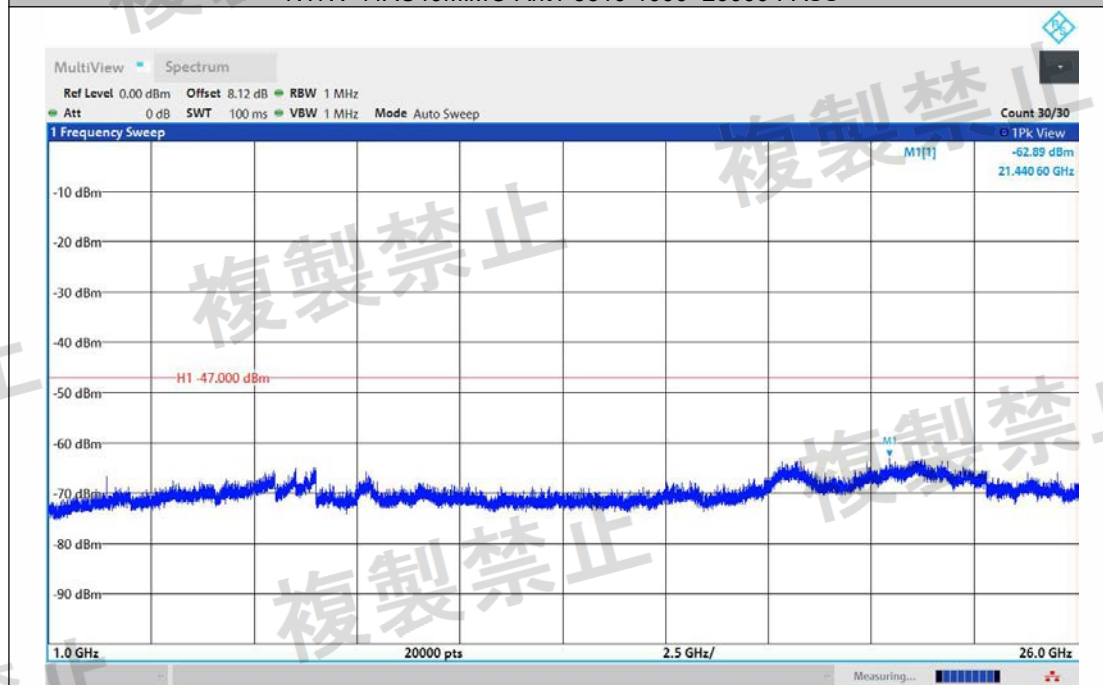


NTVN-11AC40MIMO-Ant2-5310-1000~26000-PASS

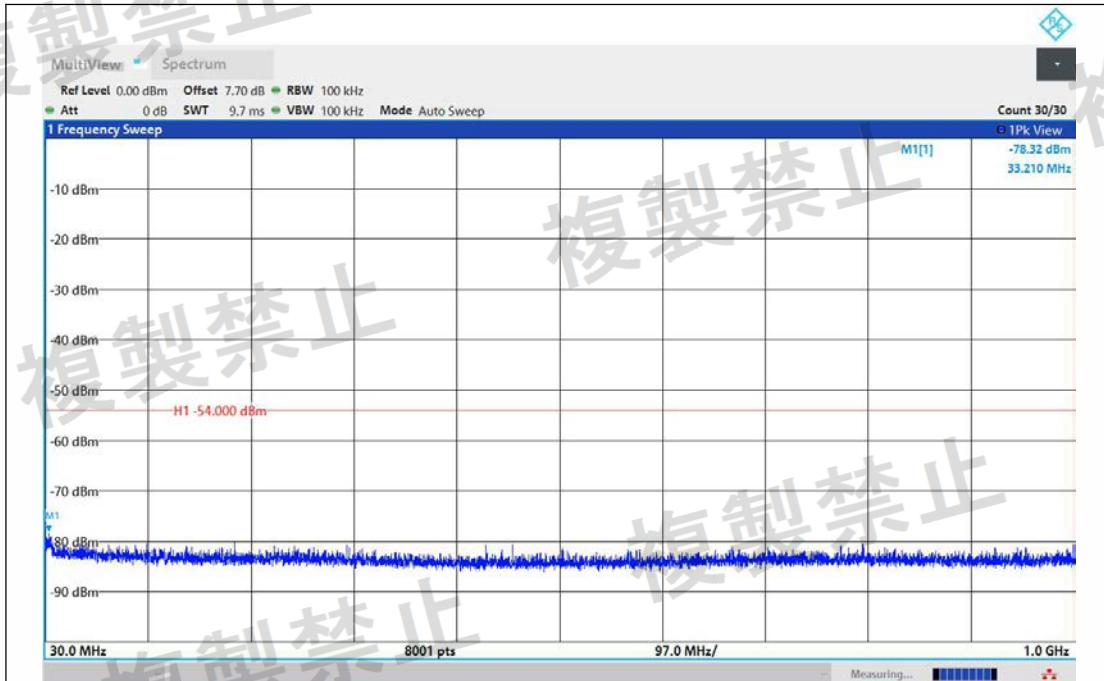


NTNV-11AC40MIMO-Ant1-5510-30~1000-PASS

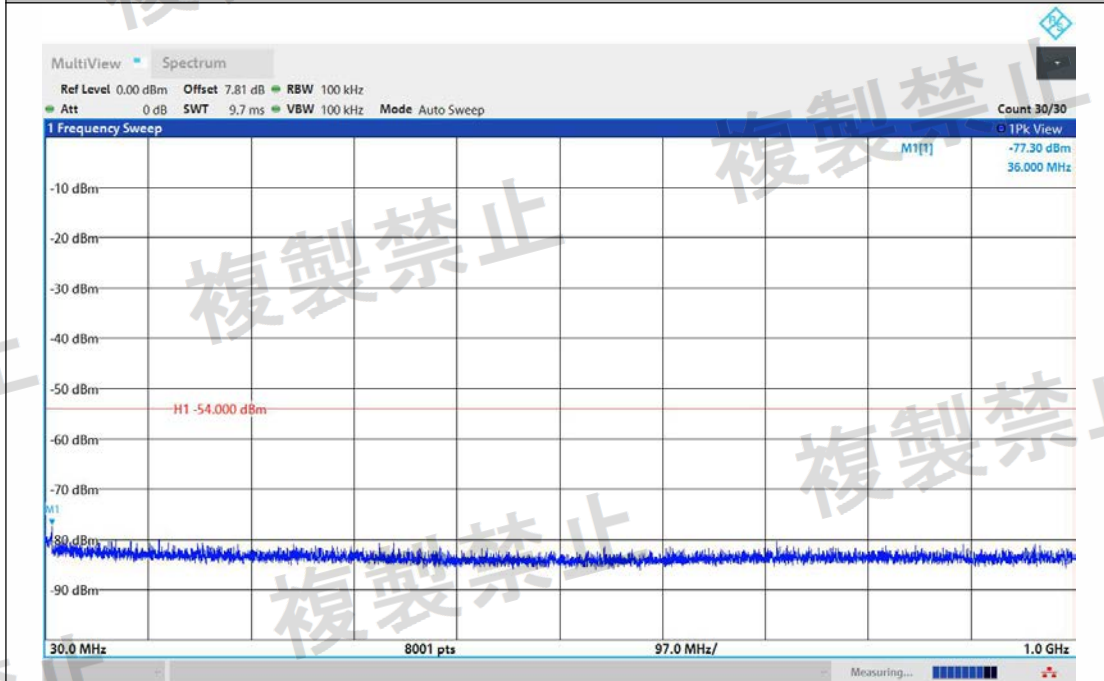


NTNV-11AC40MIMO-Ant2-5510-30~1000-PASS

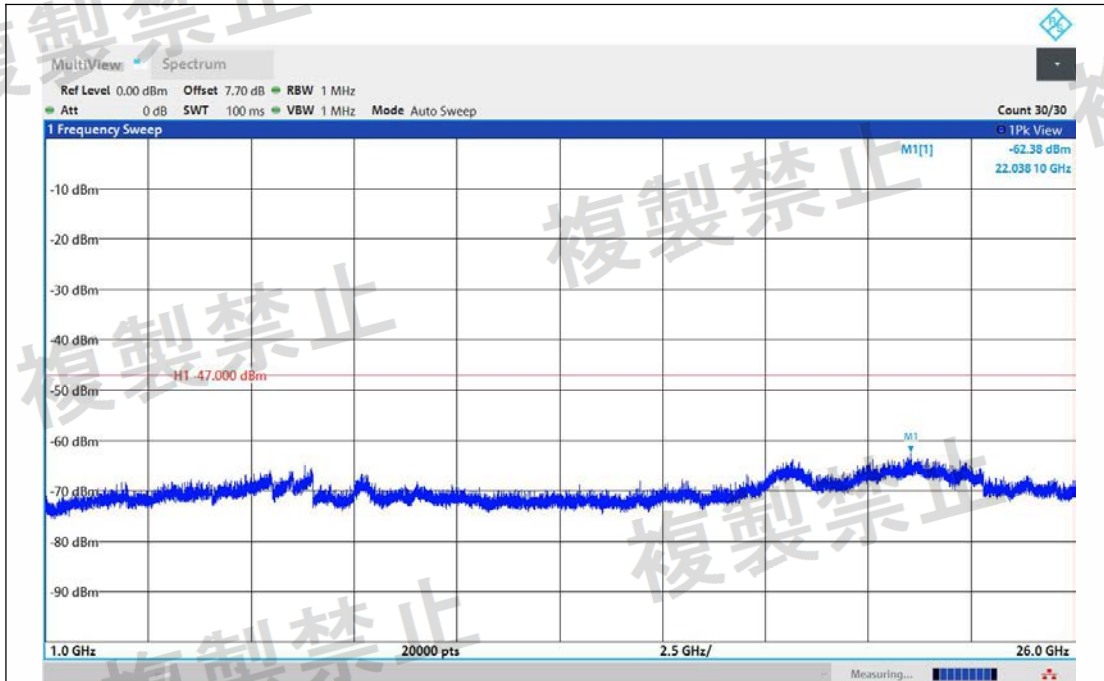


NTNV-11AC40MIMO-Ant1-5510-1000~26000-PASS

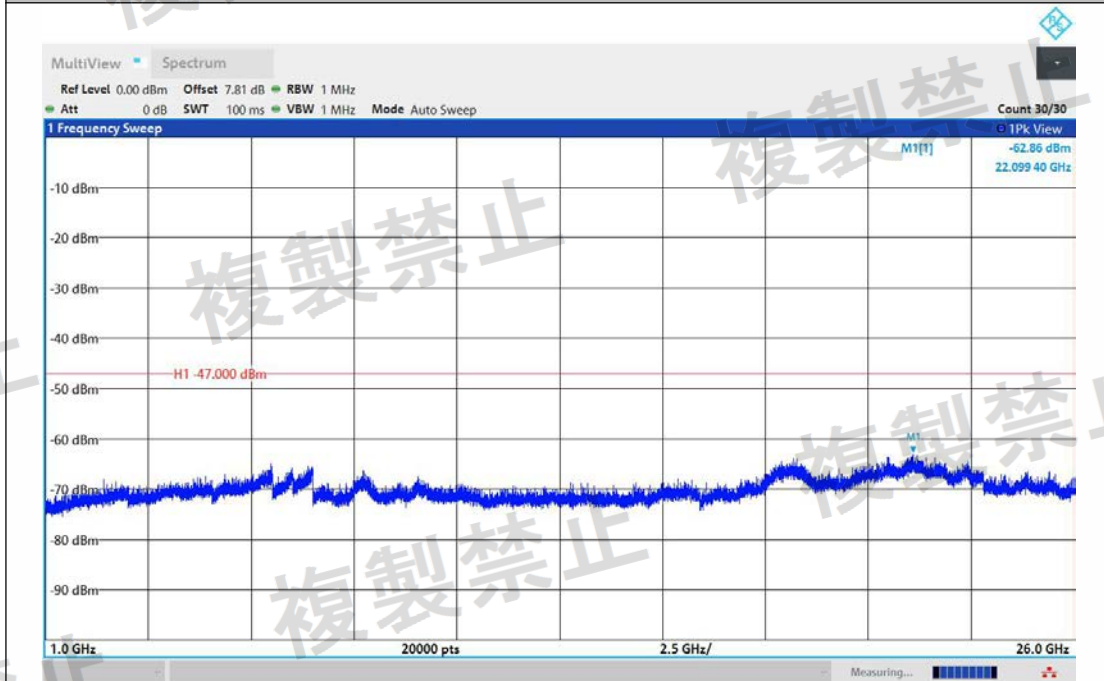


NTNV-11AC40MIMO-Ant2-5510-1000~26000-PASS

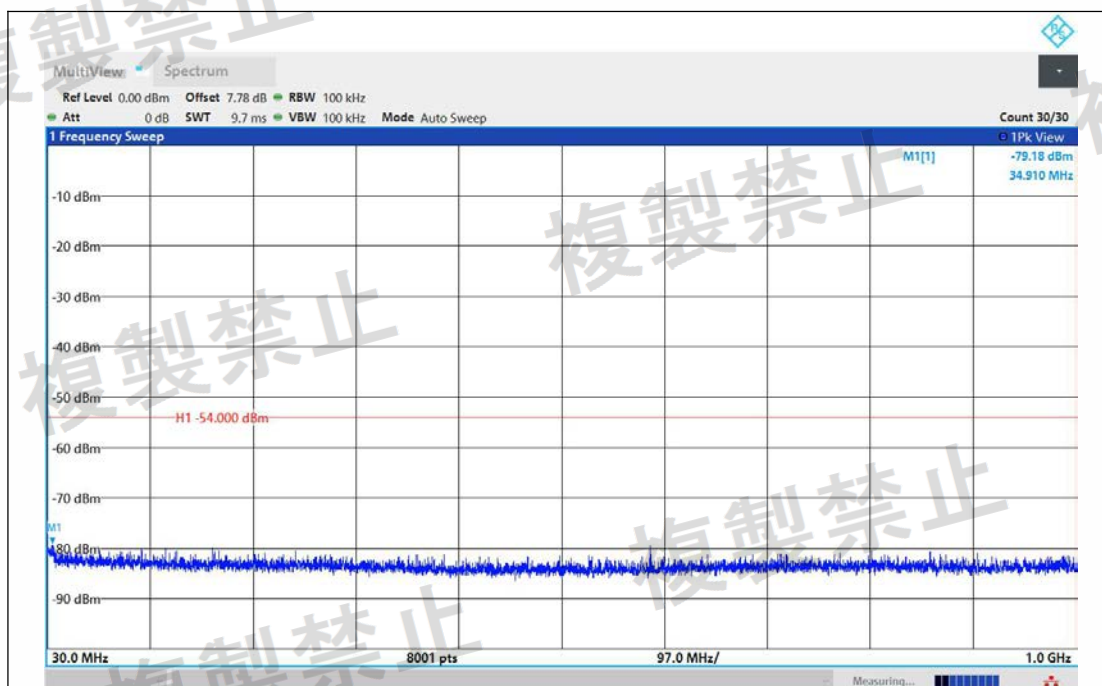


NTNV-11AC40MIMO-Ant1-5550-30~1000-PASS

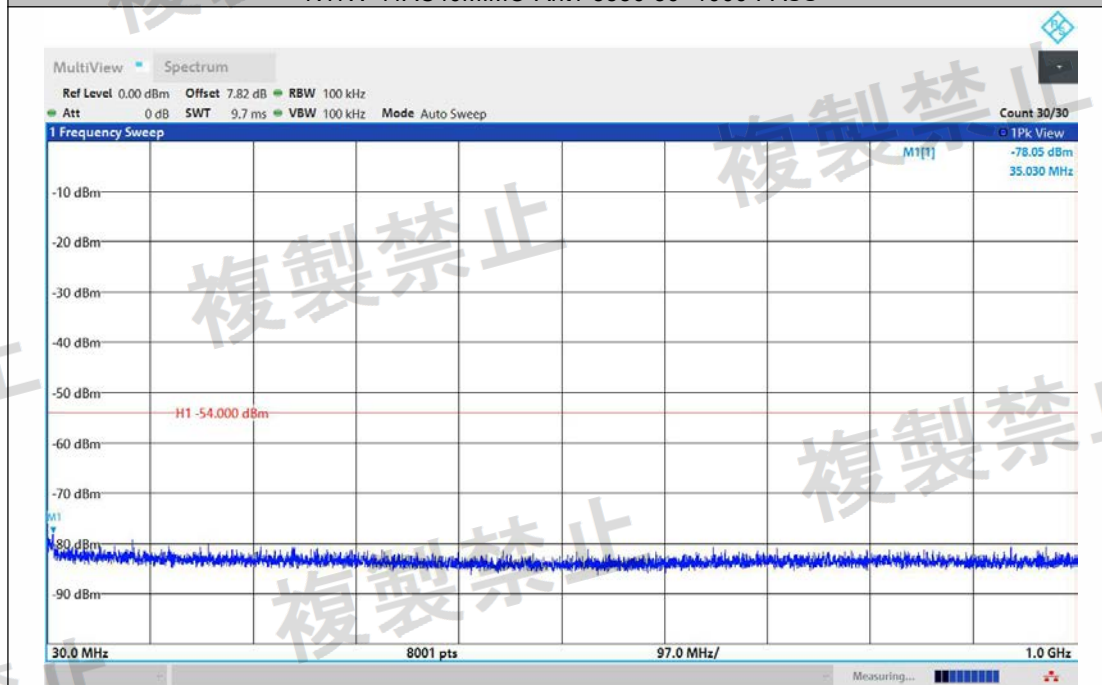


NTNV-11AC40MIMO-Ant2-5550-30~1000-PASS

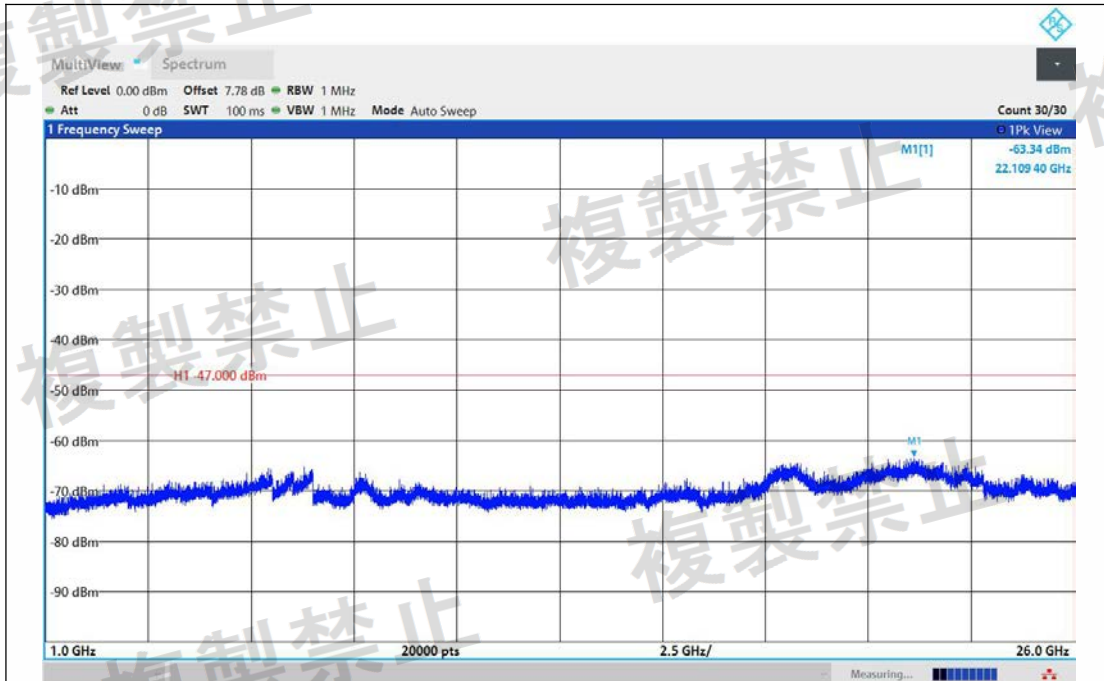


NTNV-11AC40MIMO-Ant1-5550-1000~26000-PASS

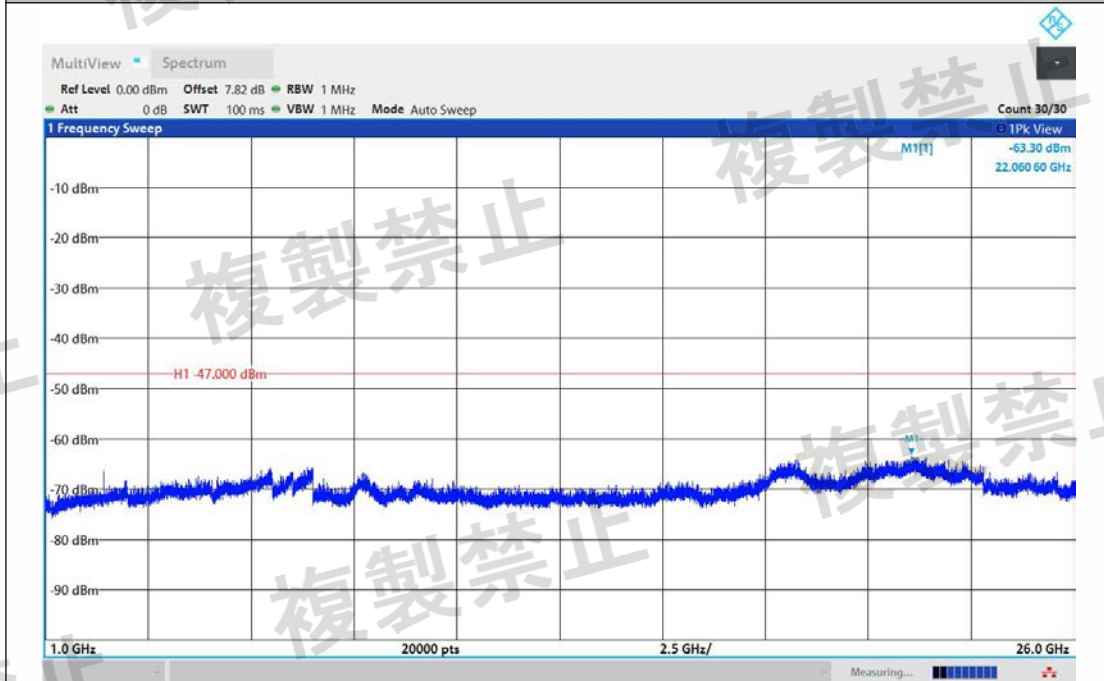


NTNV-11AC40MIMO-Ant2-5550-1000~26000-PASS

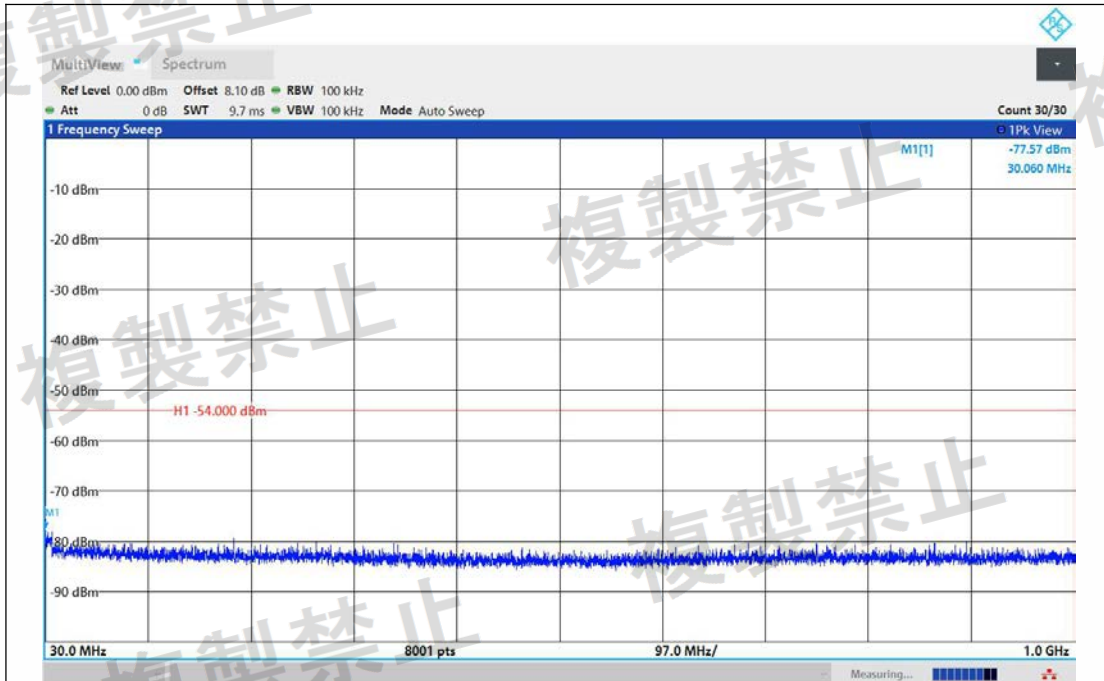


NTNV-11AC40MIMO-Ant1-5670-30~1000-PASS

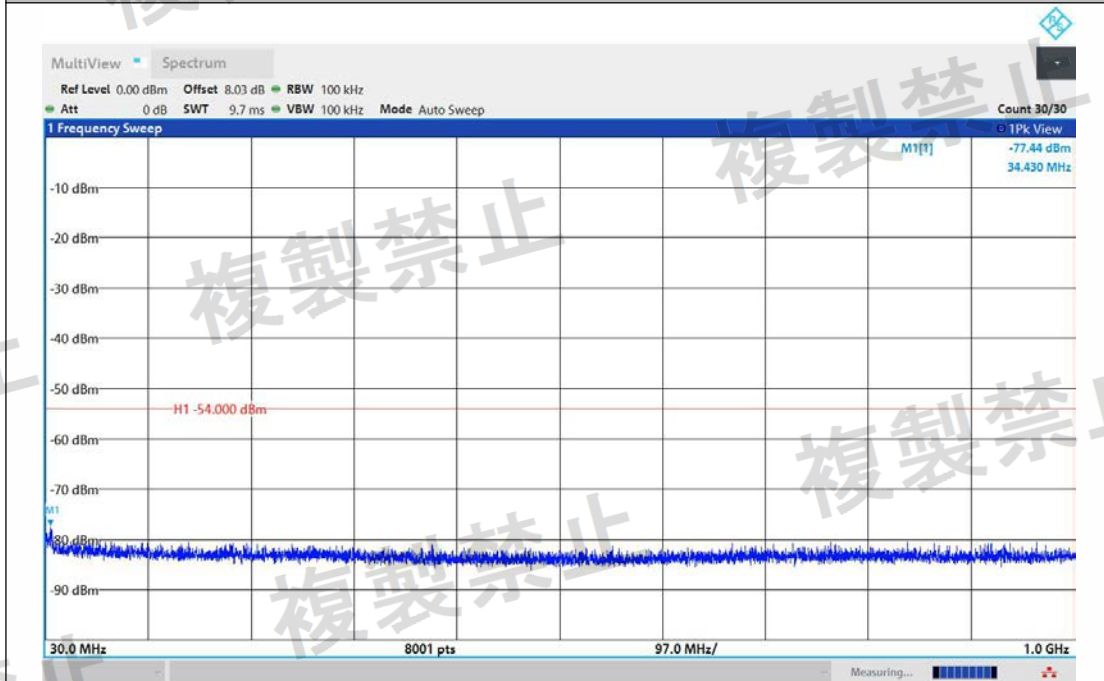


NTNV-11AC40MIMO-Ant2-5670-30~1000-PASS

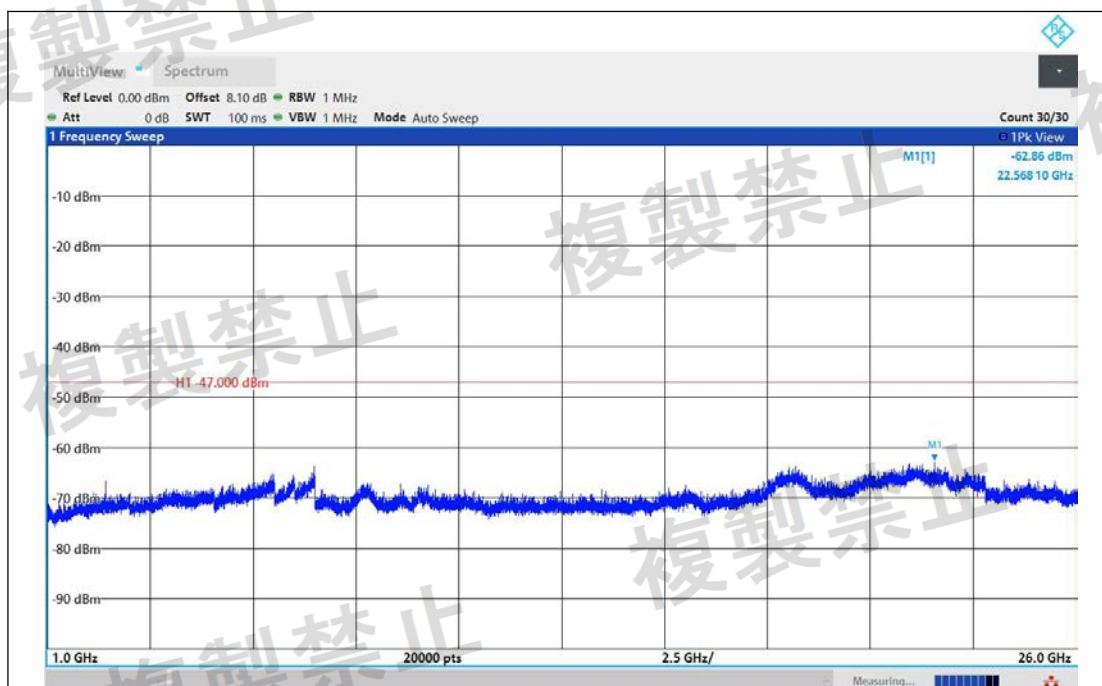


NTNV-11AC40MIMO-Ant1-5670-1000~26000-PASS

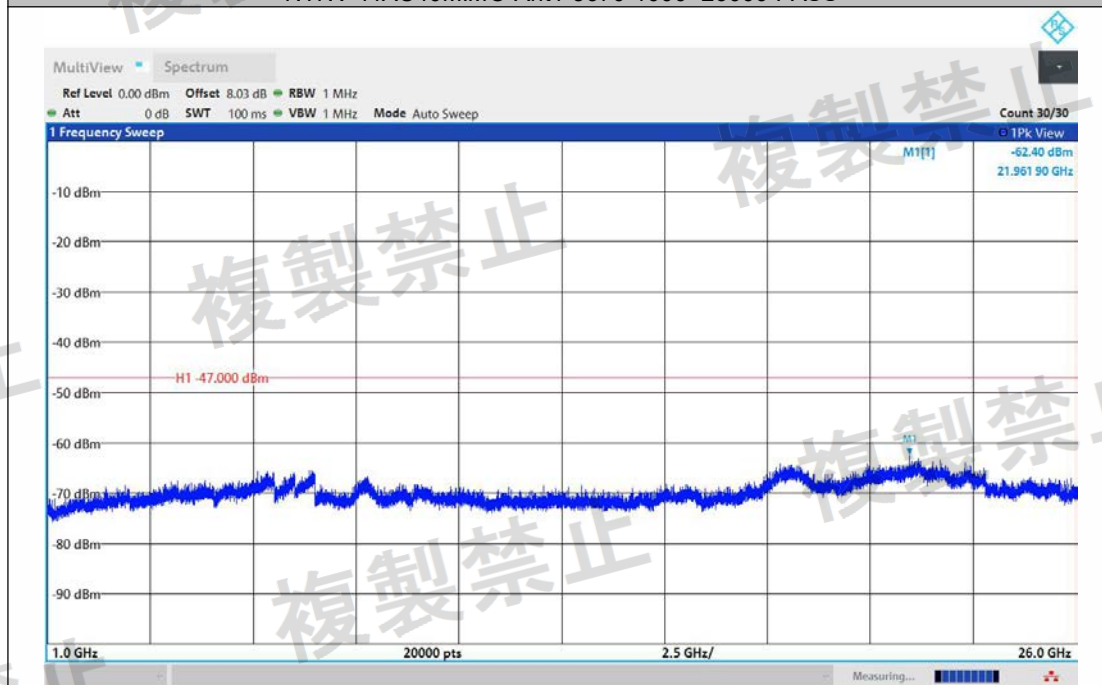


NTNV-11AC40MIMO-Ant2-5670-1000~26000-PASS

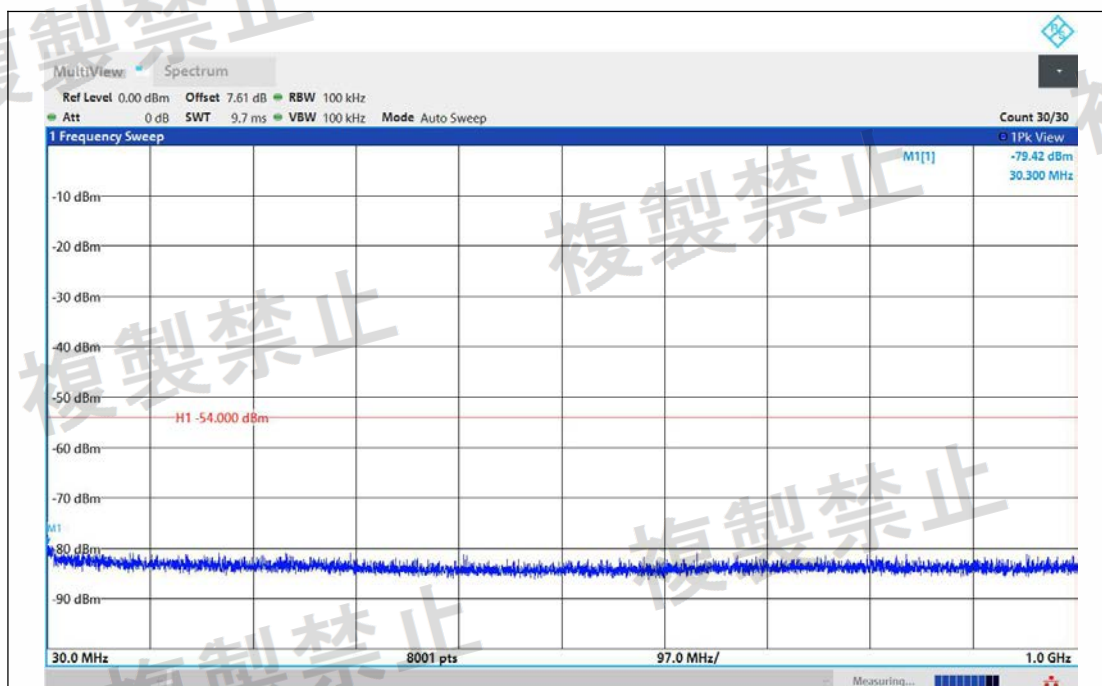


NTNV-11AC80MIMO-Ant1-5210-30~1000-PASS

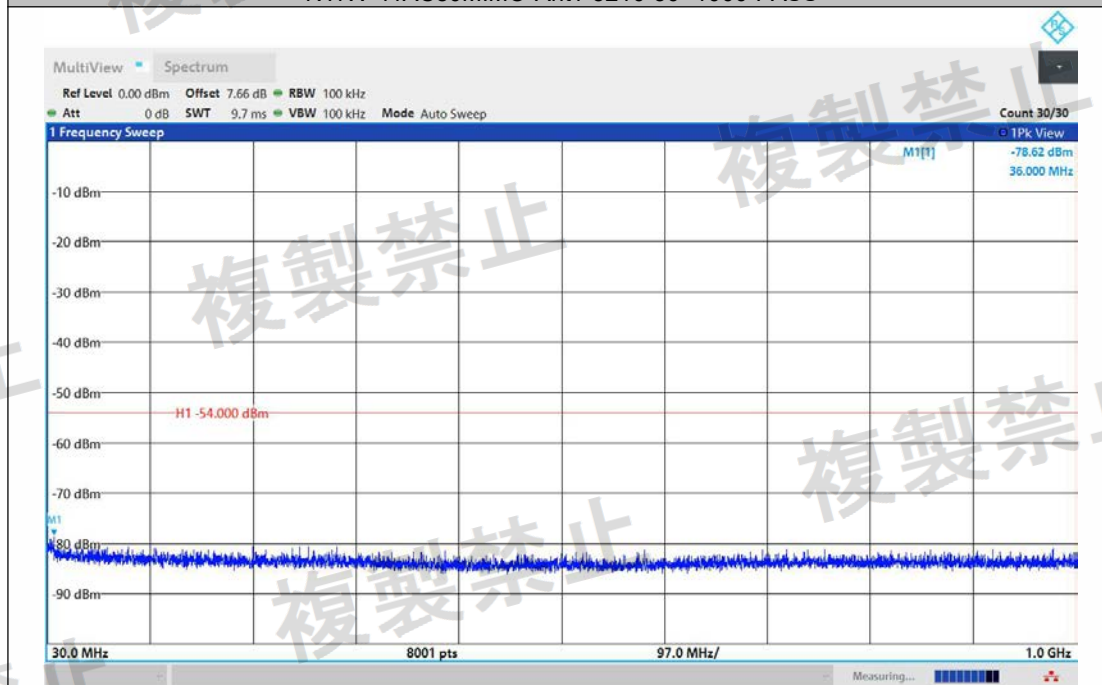


NTNV-11AC80MIMO-Ant2-5210-30~1000-PASS

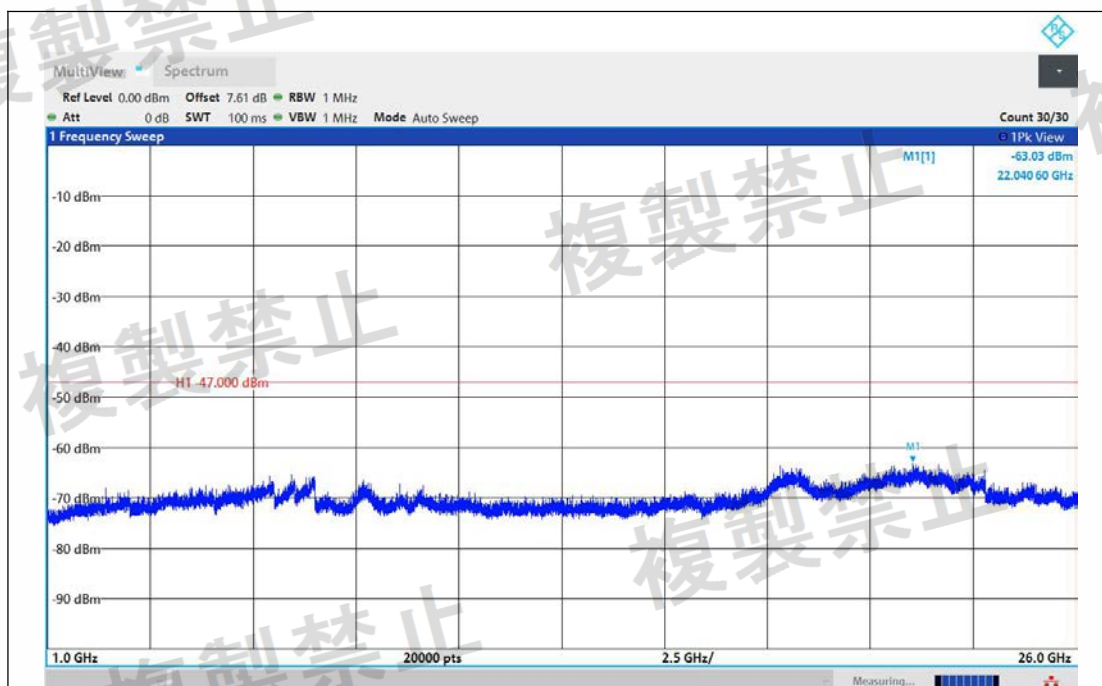


NTNV-11AC80MIMO-Ant1-5210-1000~26000-PASS

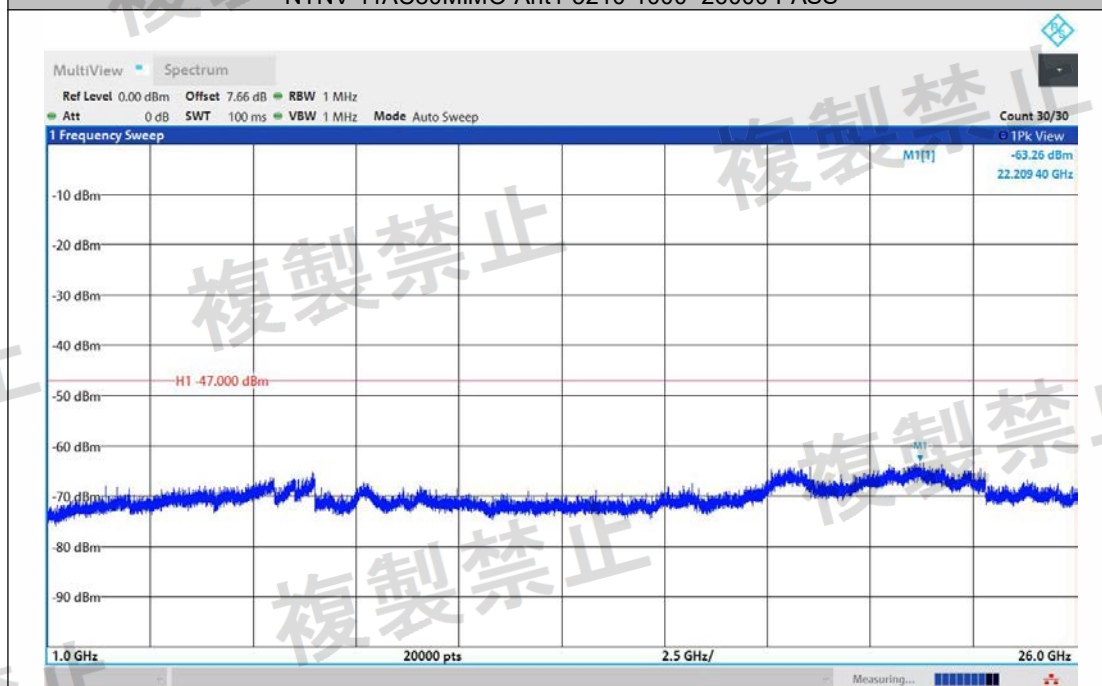


NTNV-11AC80MIMO-Ant2-5210-1000~26000-PASS

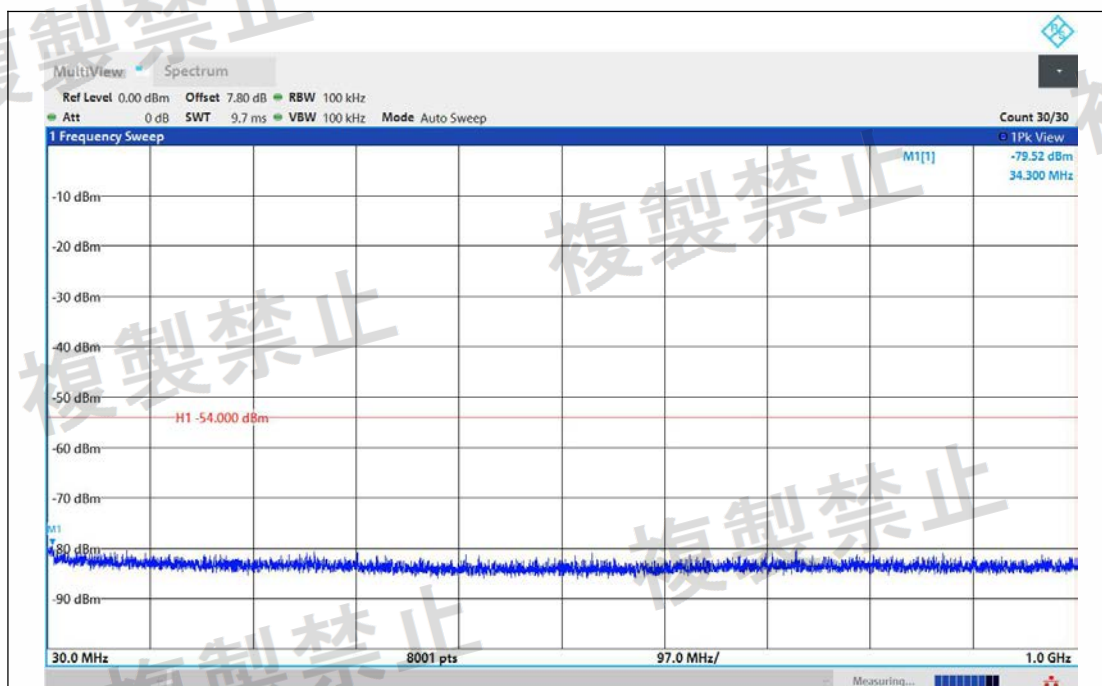


NTNV-11AC80MIMO-Ant1-5290-30~1000-PASS

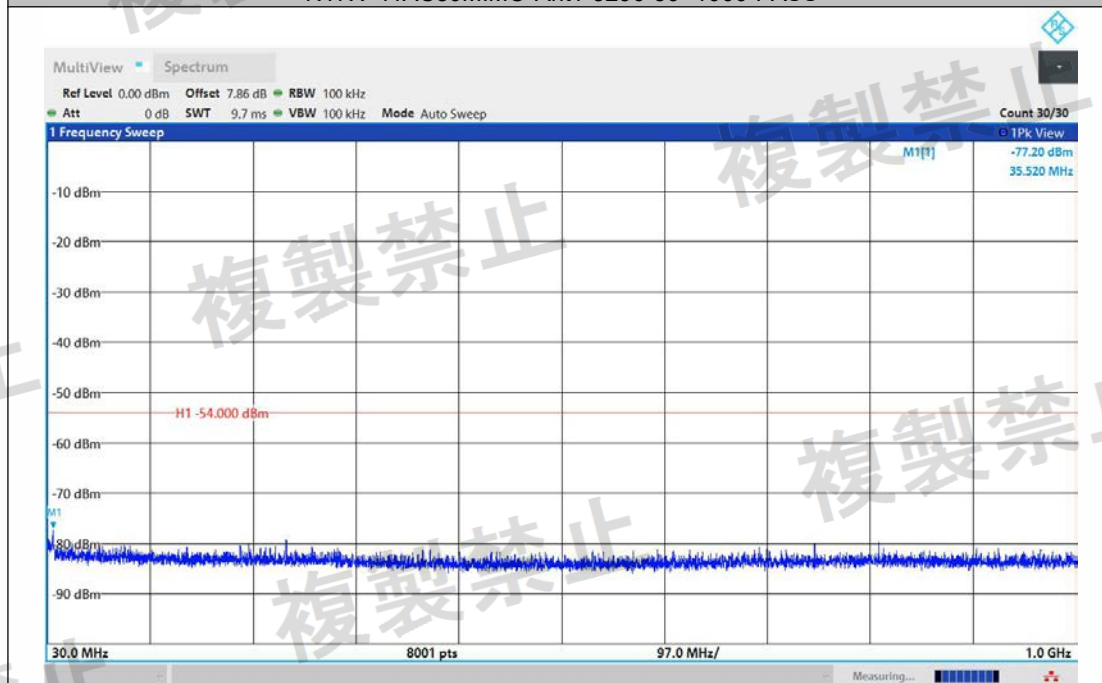


NTNV-11AC80MIMO-Ant2-5290-30~1000-PASS

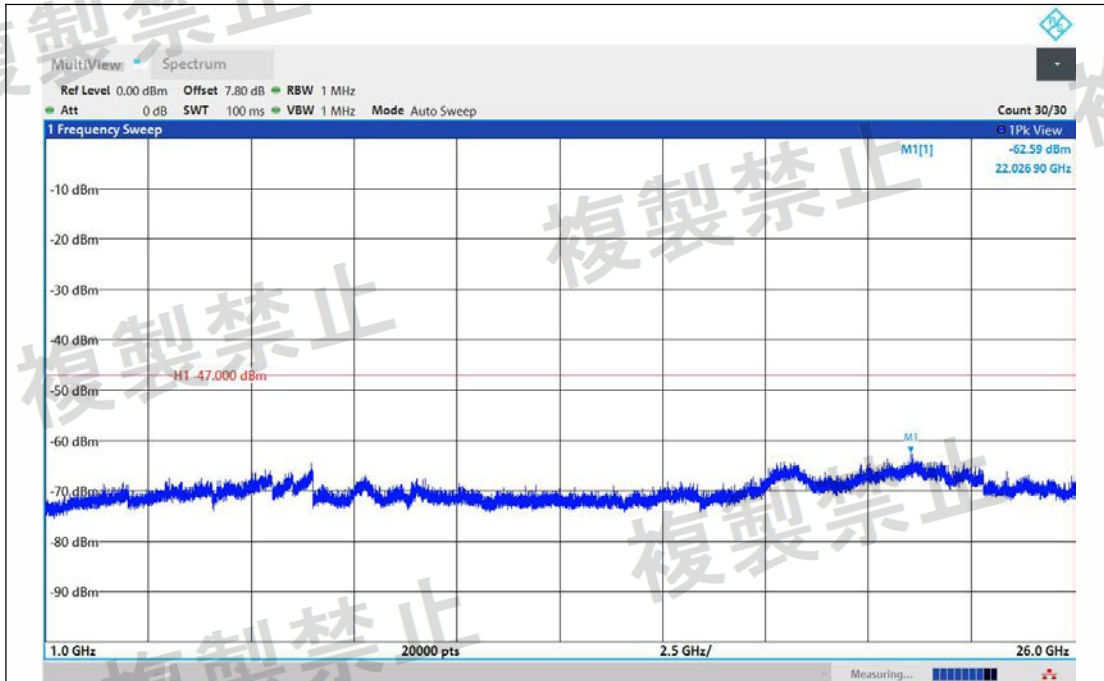


NTNV-11AC80MIMO-Ant1-5290-1000~26000-PASS

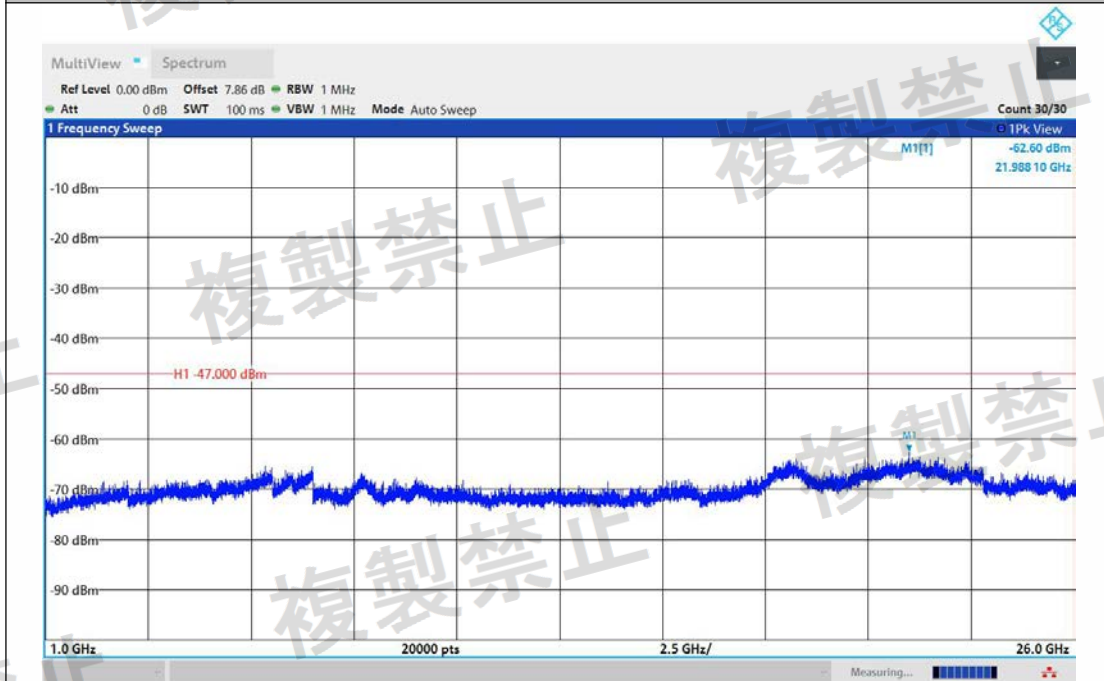


NTNV-11AC80MIMO-Ant2-5290-1000~26000-PASS

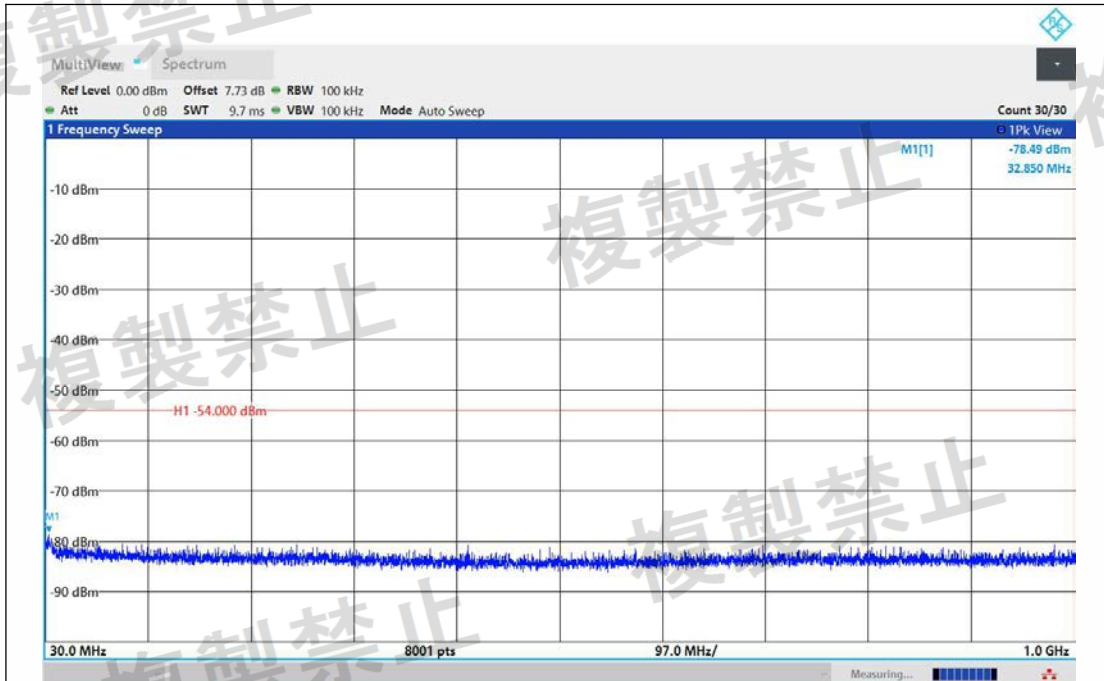


NTNV-11AC80MIMO-Ant1-5530-30~1000-PASS

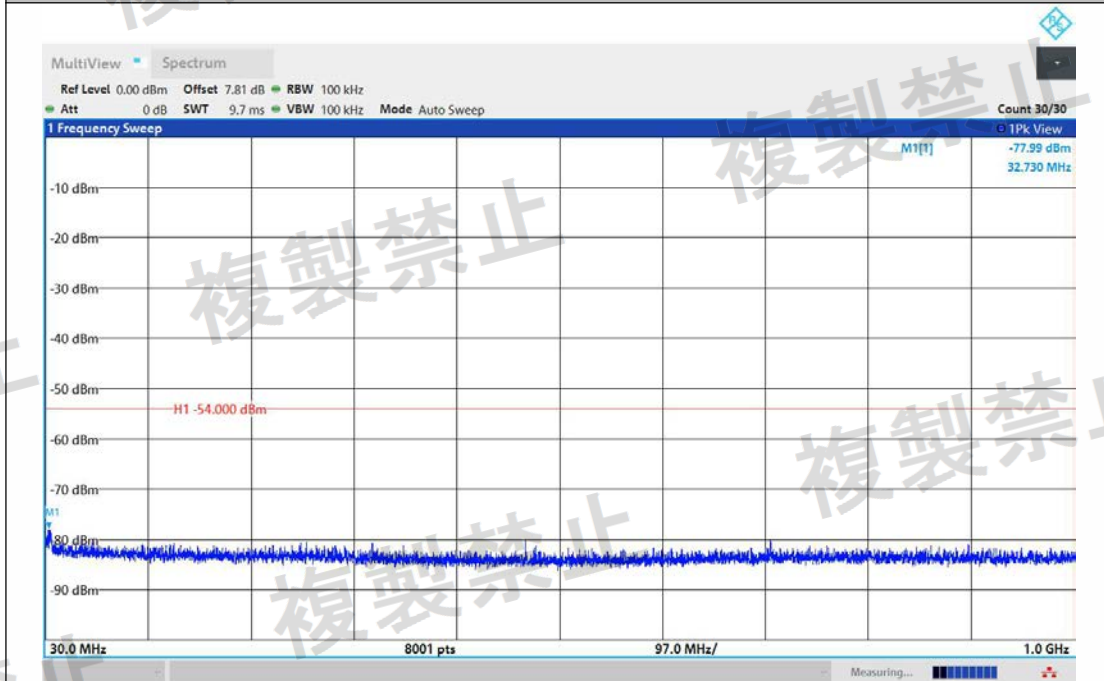


NTNV-11AC80MIMO-Ant2-5530-30~1000-PASS

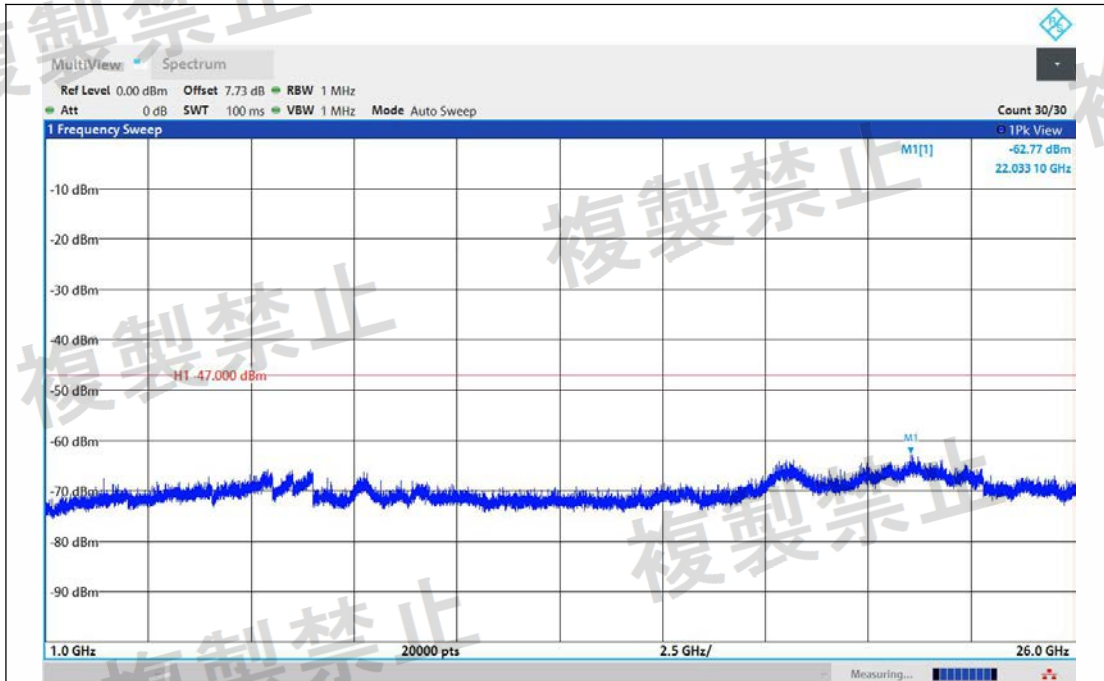


NTVN-11AC80MIMO-Ant1-5530-1000~26000-PASS

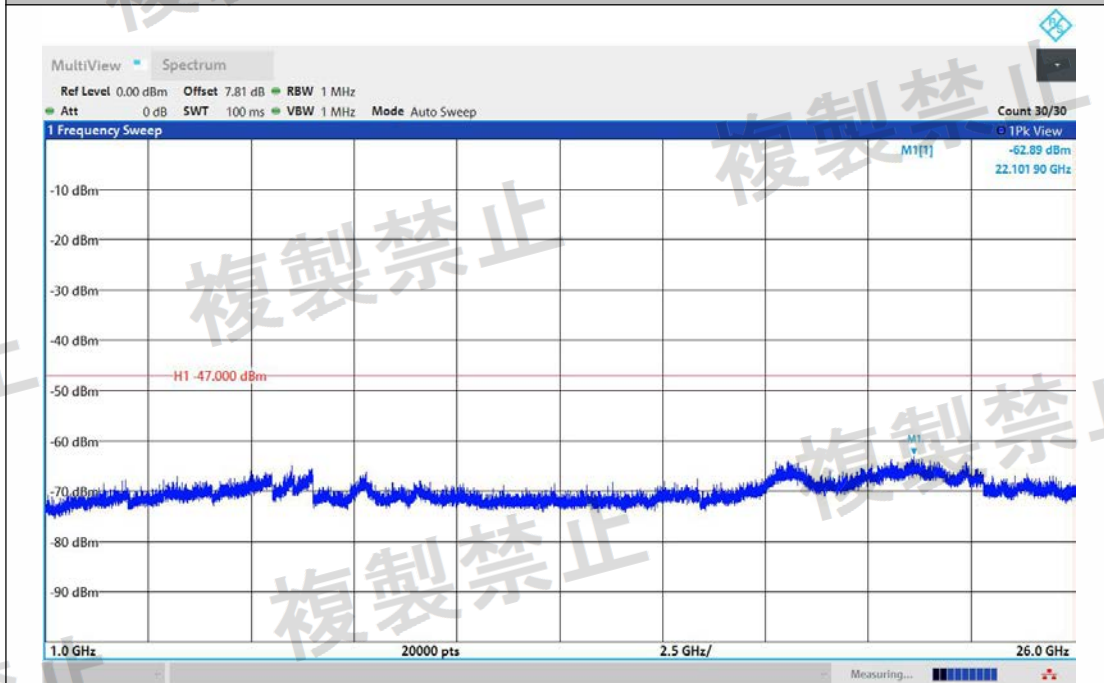



NTVN-11AC80MIMO-Ant2-5530-1000~26000-PASS

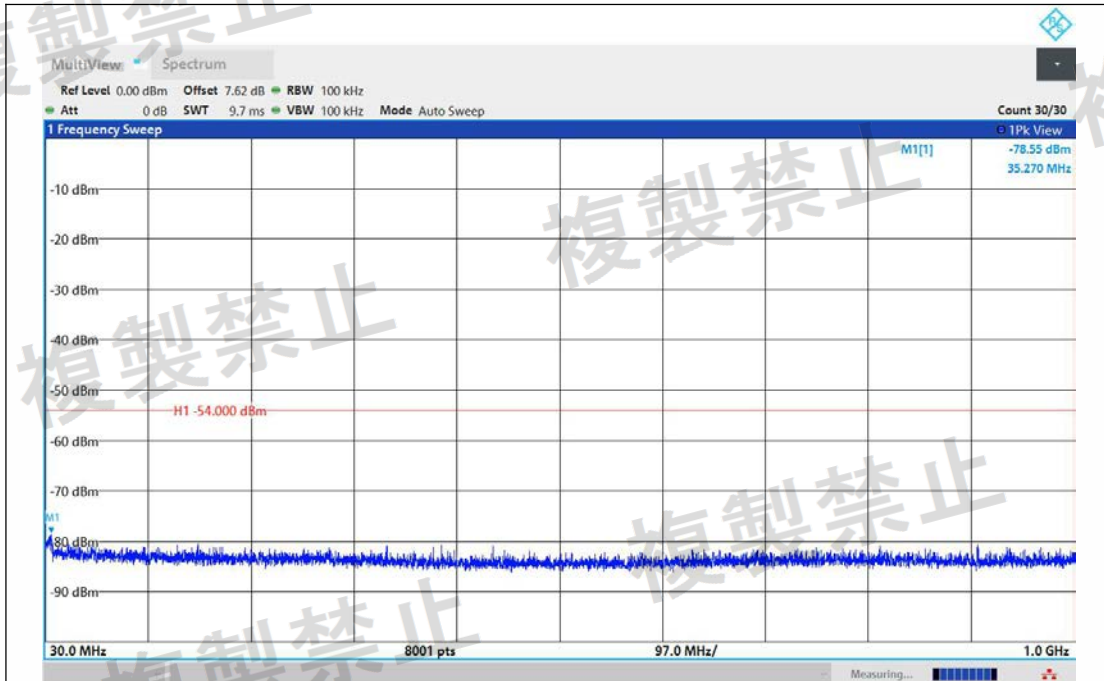


NTNV-11AC160MIMO-Ant1-5250-30~1000-PASS

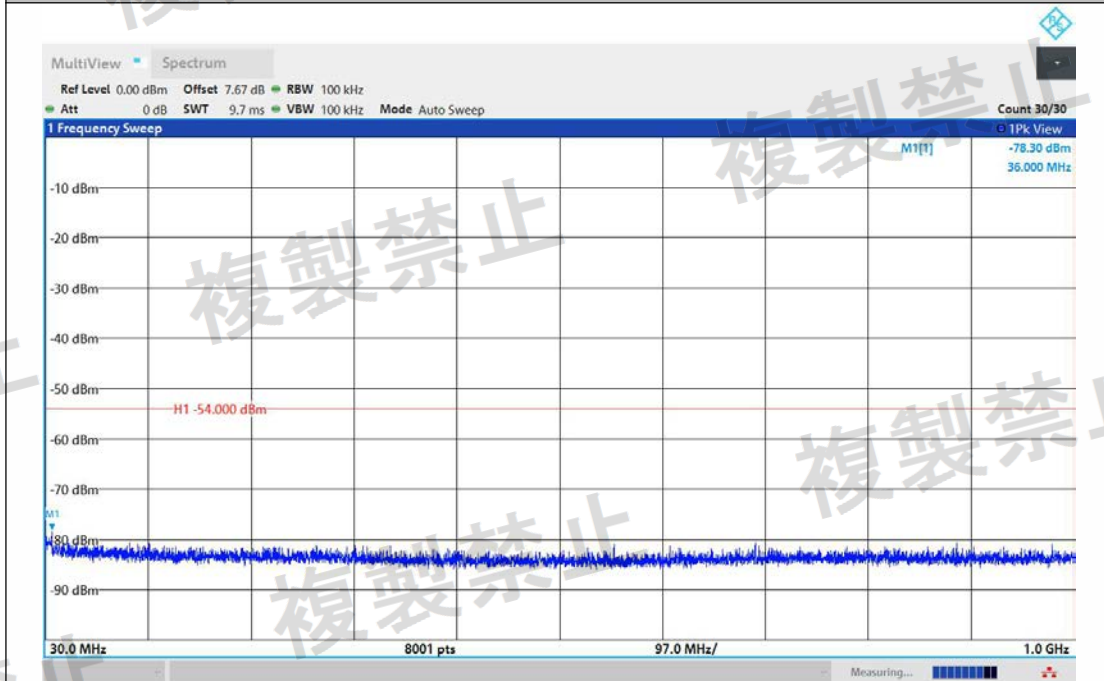


NTNV-11AC160MIMO-Ant2-5250-30~1000-PASS

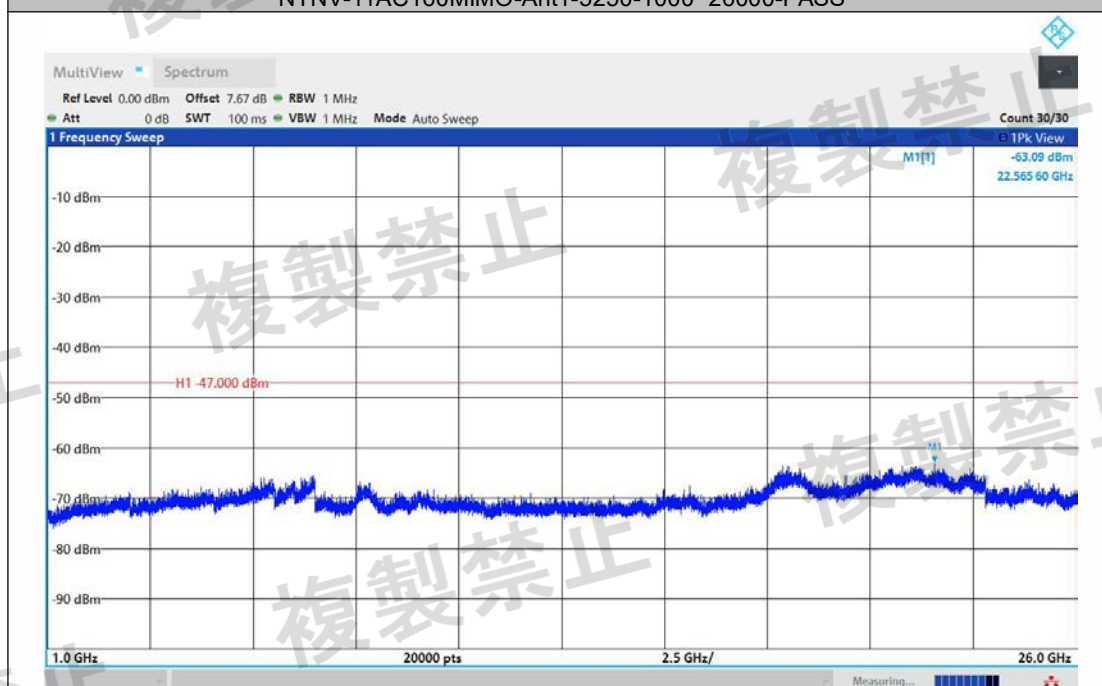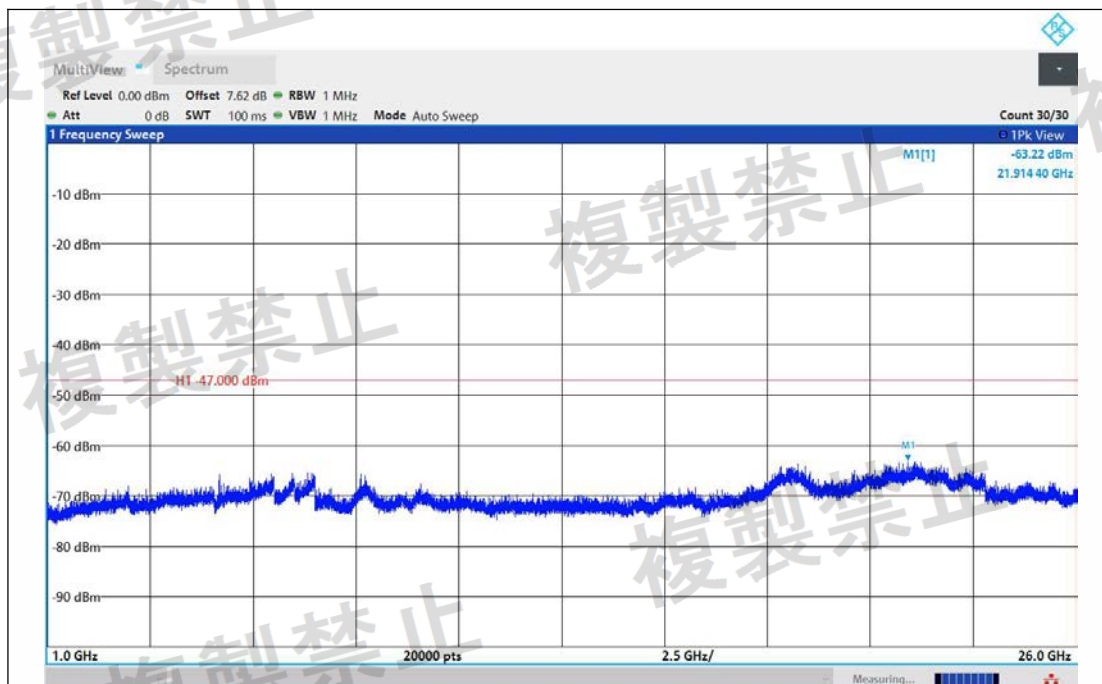


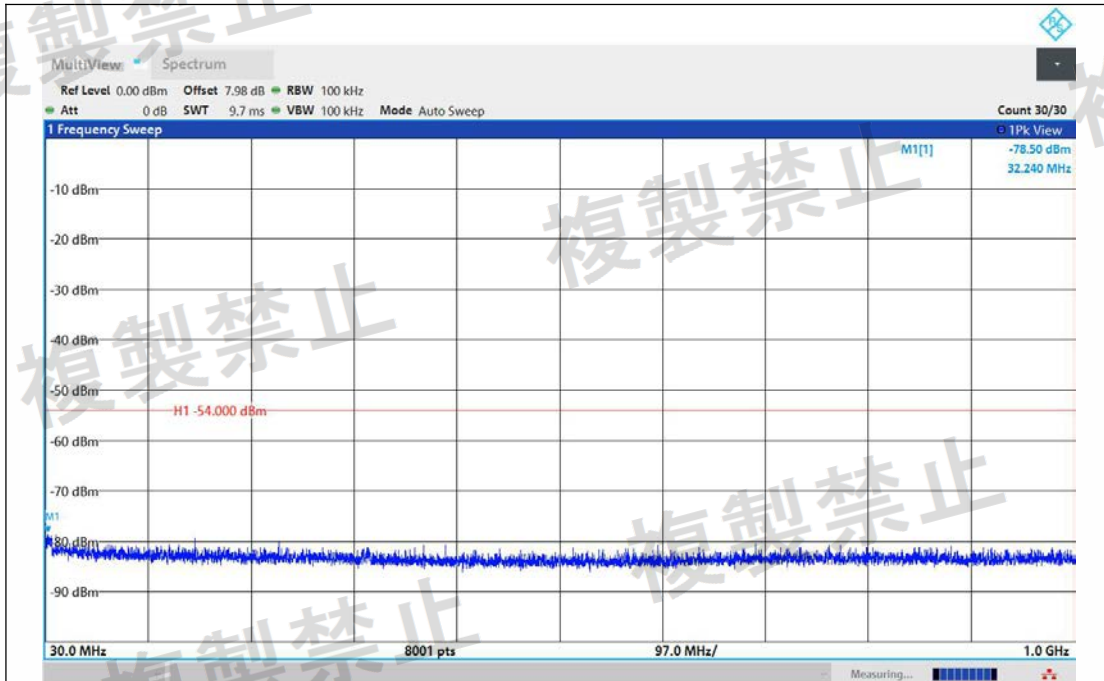


NTNV-11AC160MIMO-Ant1-5570-30~1000-PASS

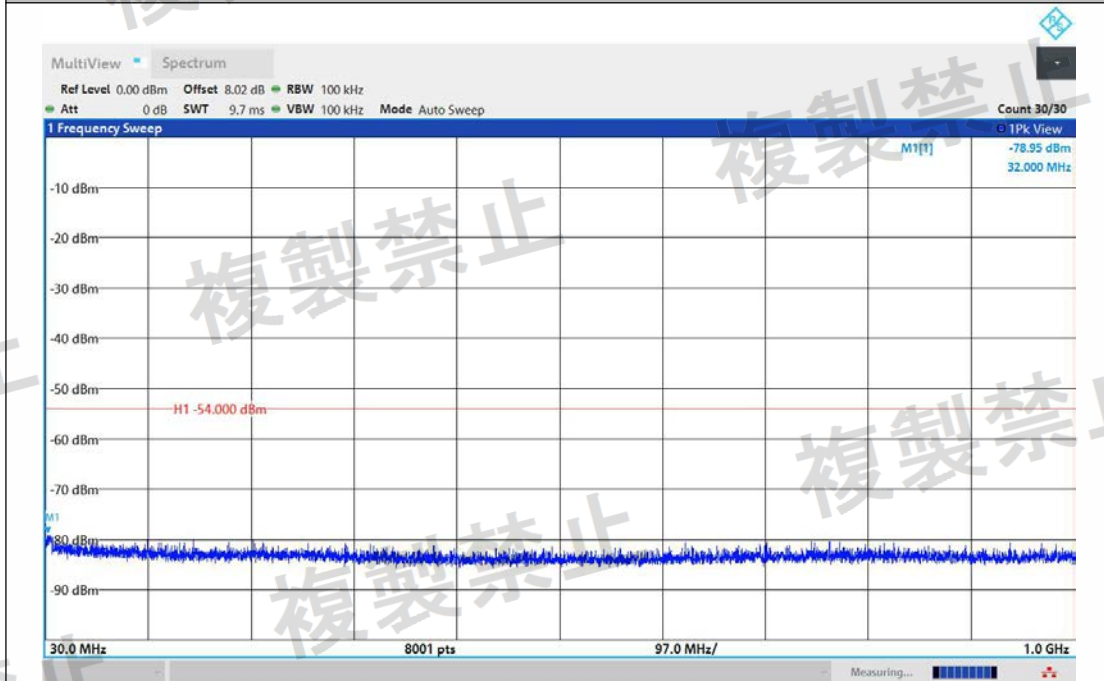


NTNV-11AC160MIMO-Ant2-5570-30~1000-PASS

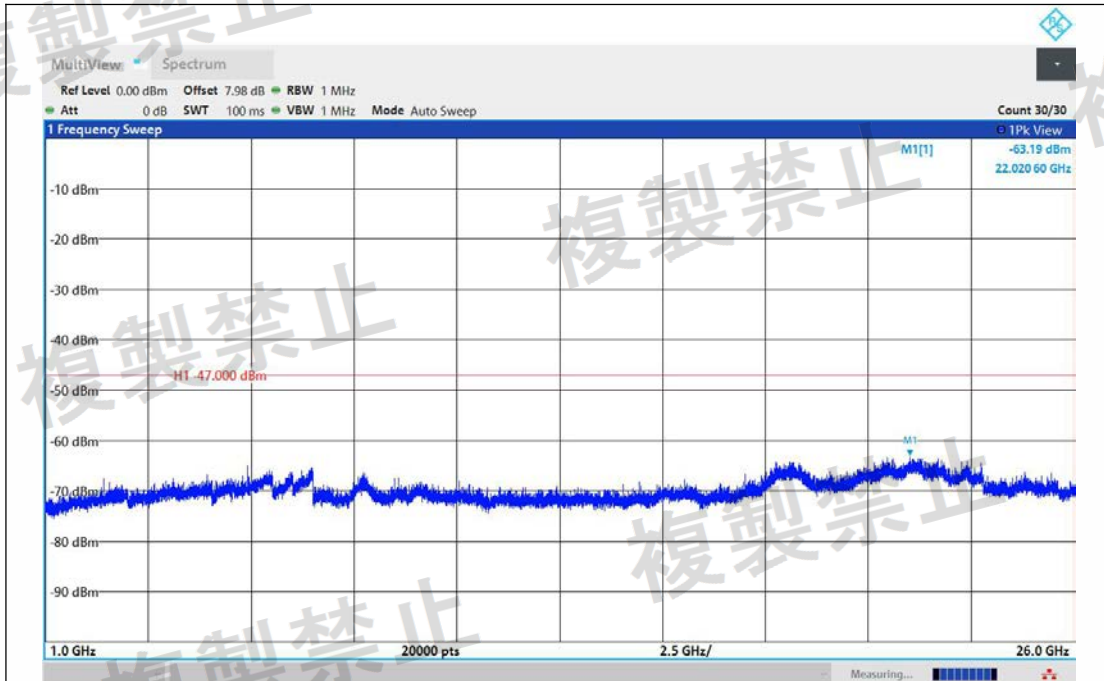


NTNV-11AC160MIMO-Ant1-5570-1000~26000-PASS

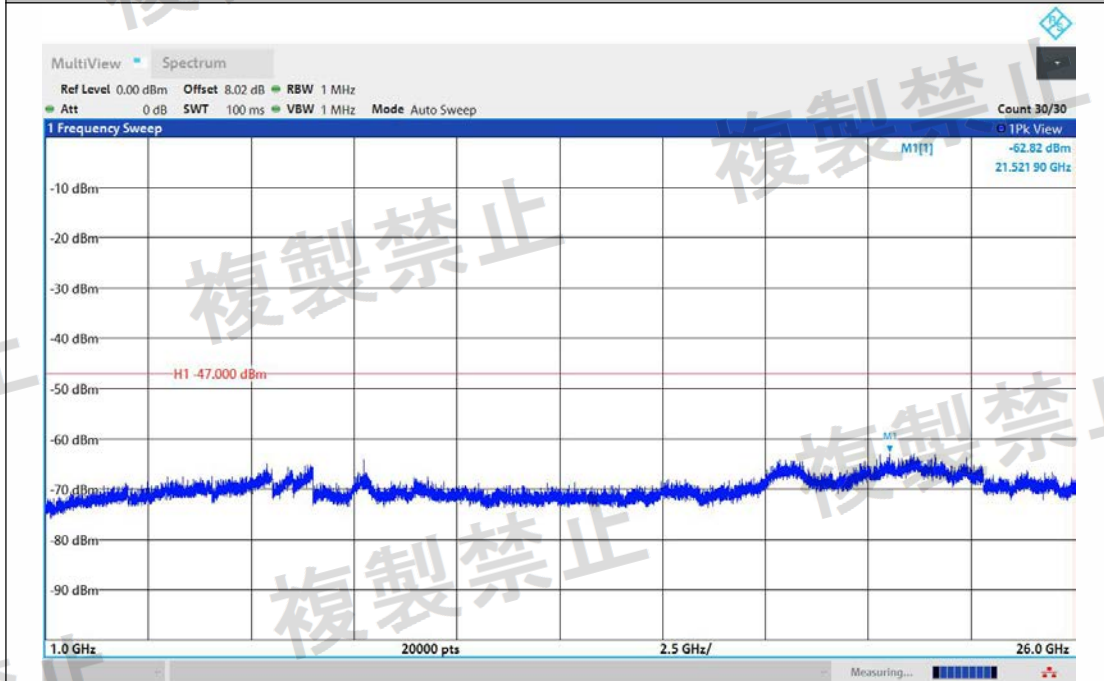


NTNV-11AC160MIMO-Ant2-5570-1000~26000-PASS

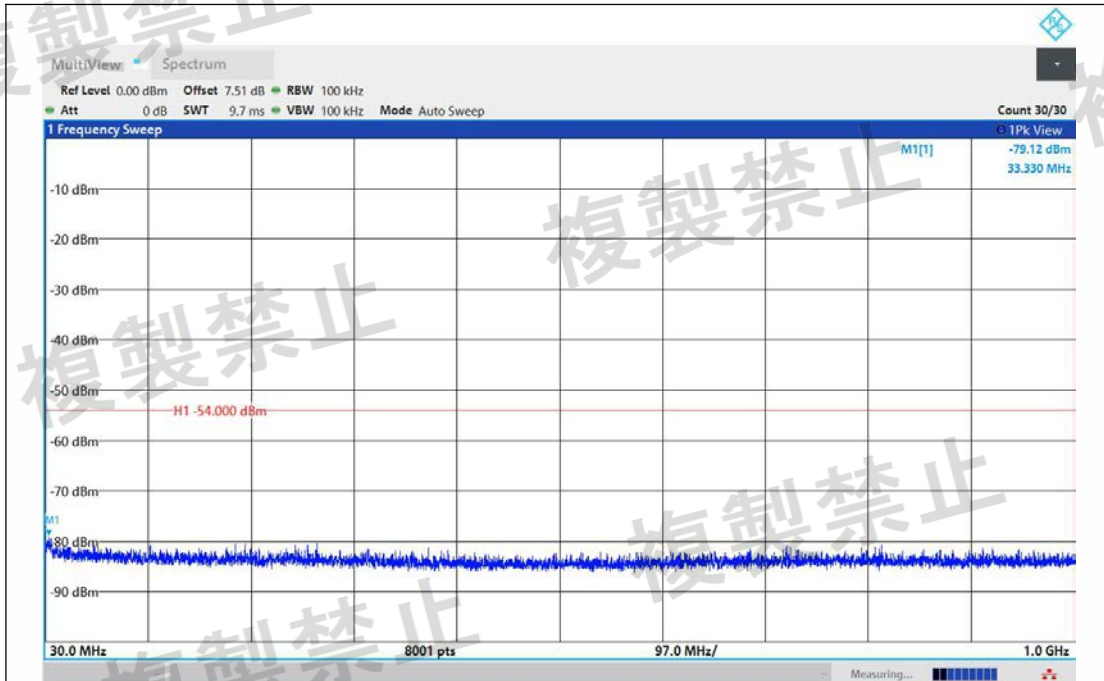


NTNV-11AX20MIMO-Ant1-5180-30~1000-PASS

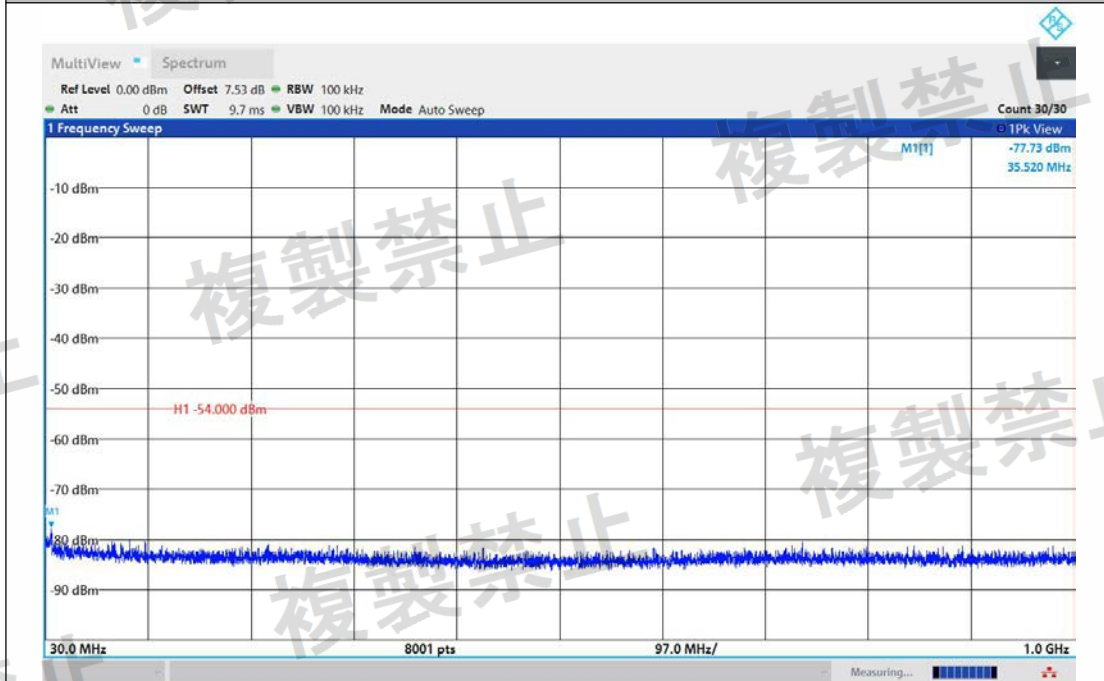


NTNV-11AX20MIMO-Ant2-5180-30~1000-PASS

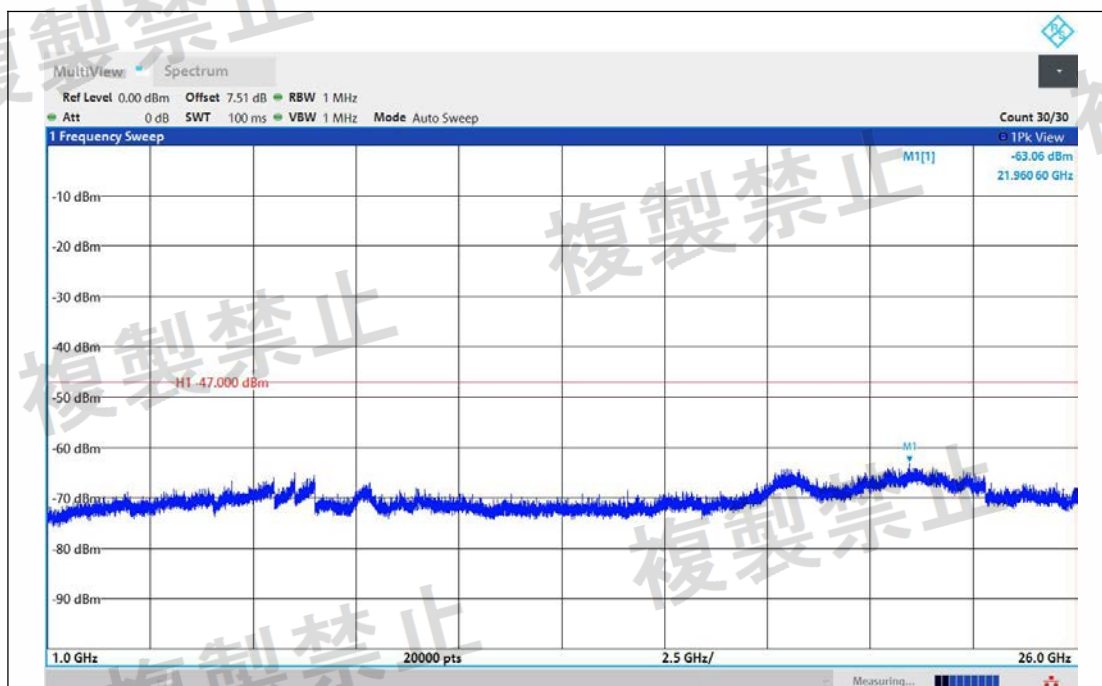


NTVN-11AX20MIMO-Ant1-5180-1000~26000-PASS

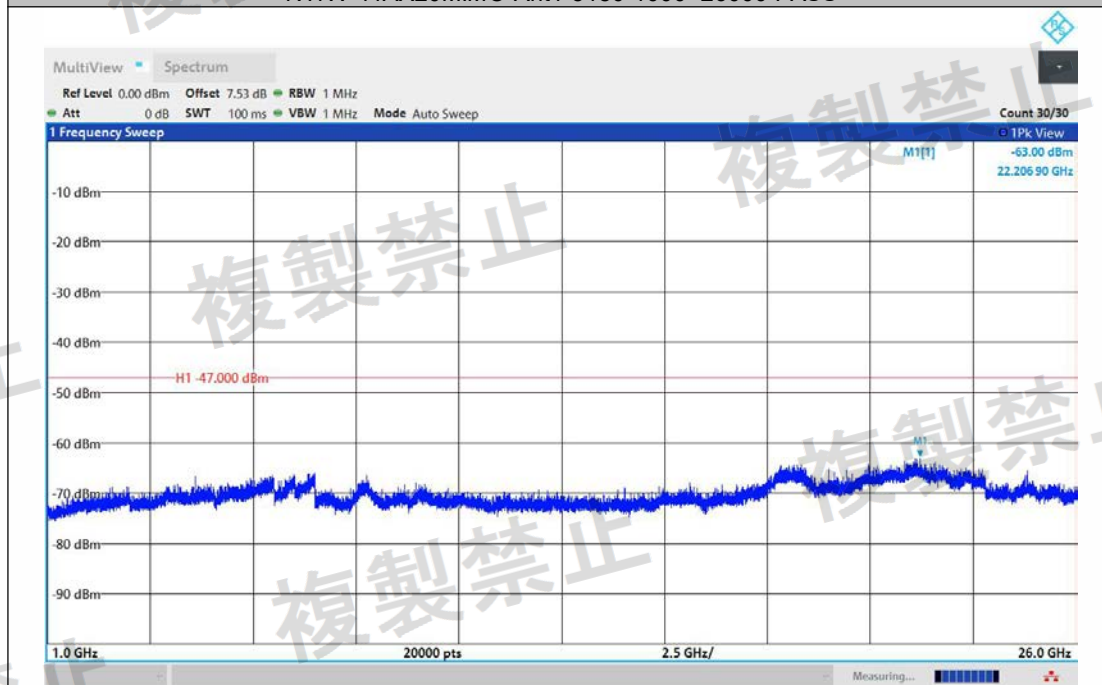


NTVN-11AX20MIMO-Ant2-5180-1000~26000-PASS

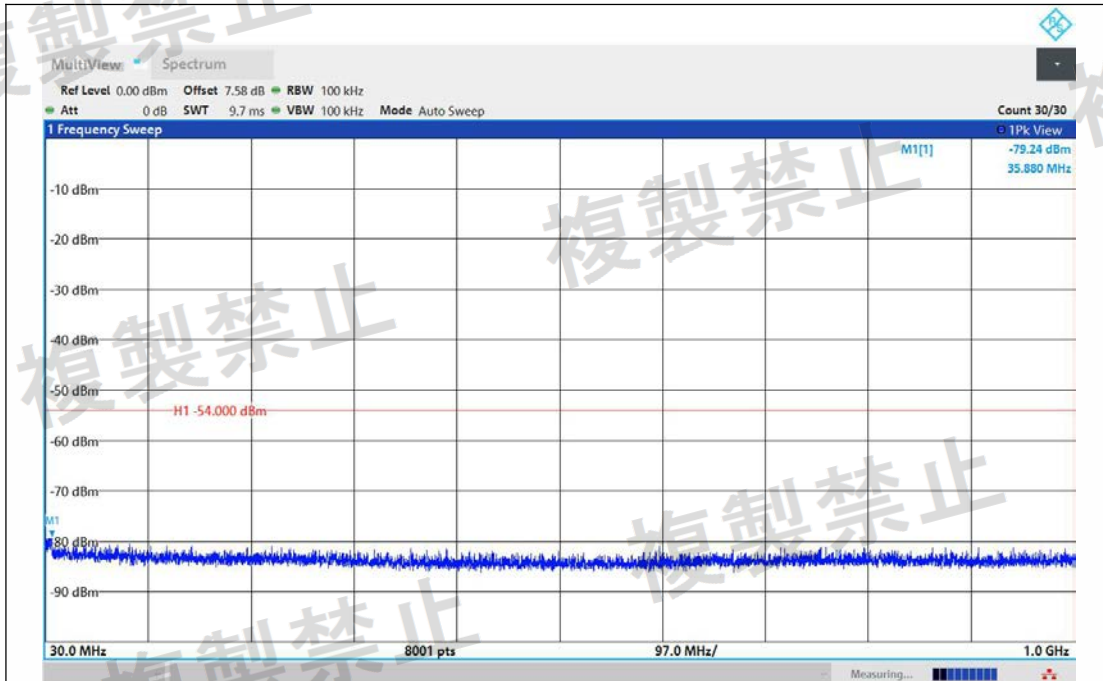


NTNV-11AX20MIMO-Ant1-5200-30~1000-PASS

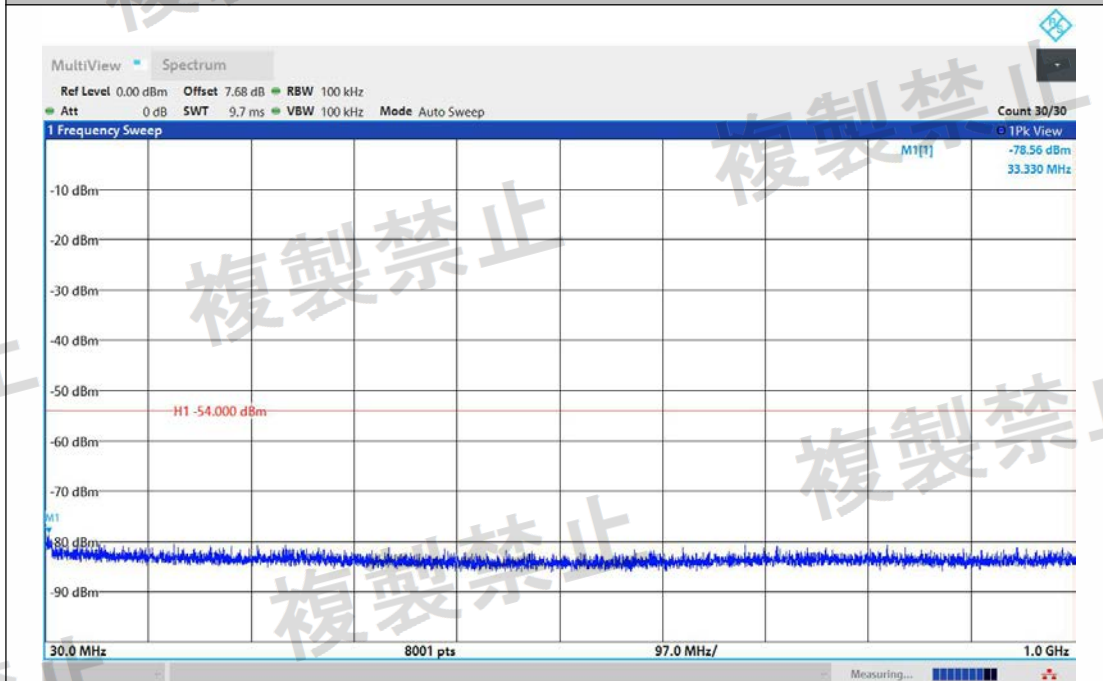


NTNV-11AX20MIMO-Ant2-5200-30~1000-PASS

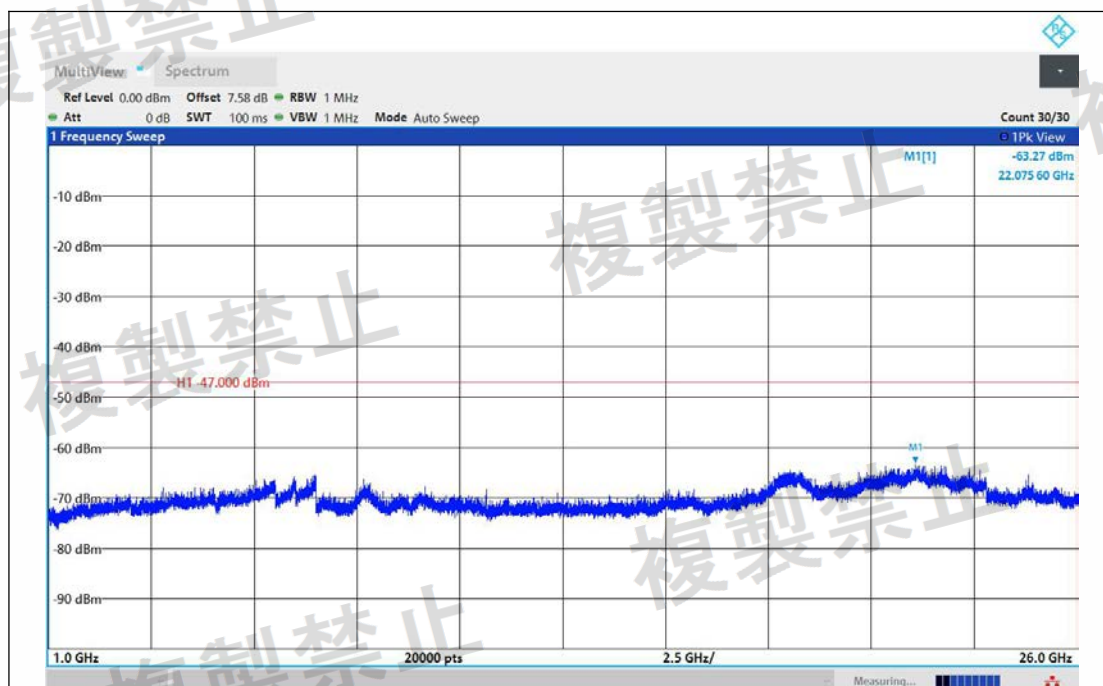


NTVN-11AX20MIMO-Ant1-5200-1000~26000-PASS

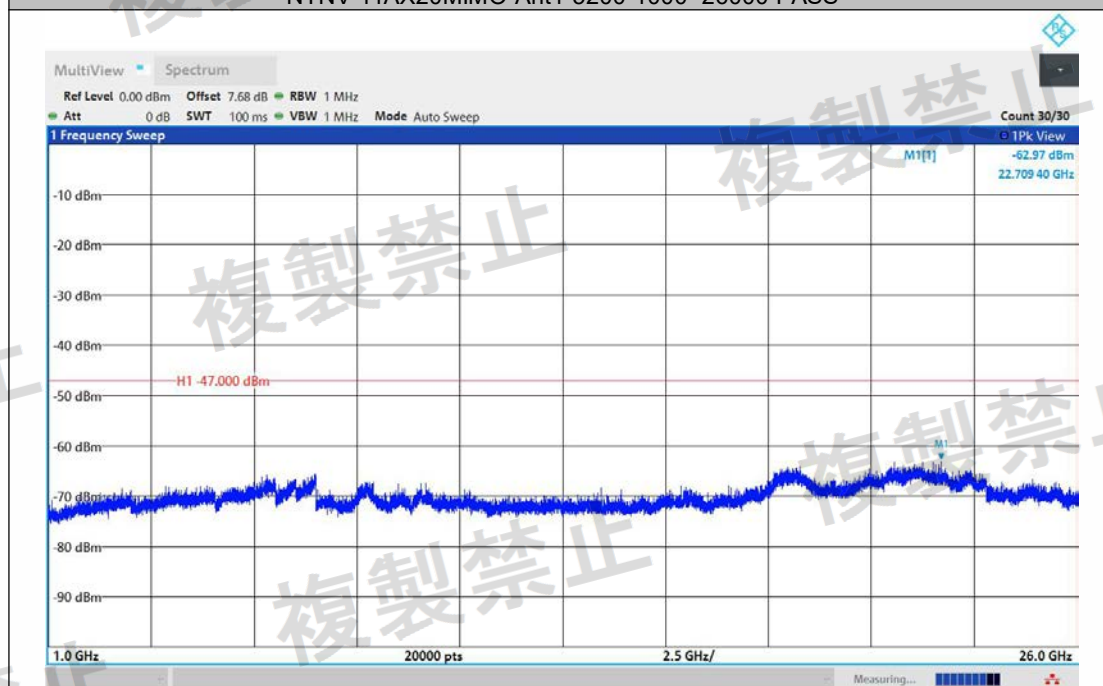


NTVN-11AX20MIMO-Ant2-5200-1000~26000-PASS

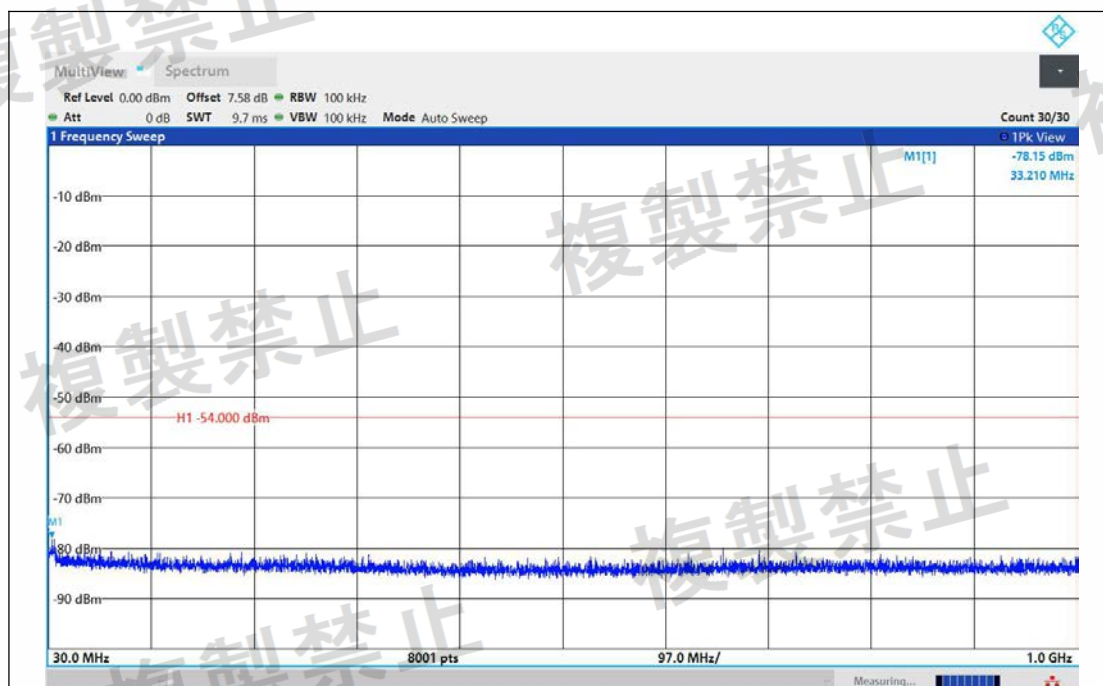


NTNV-11AX20MIMO-Ant1-5240-30~1000-PASS

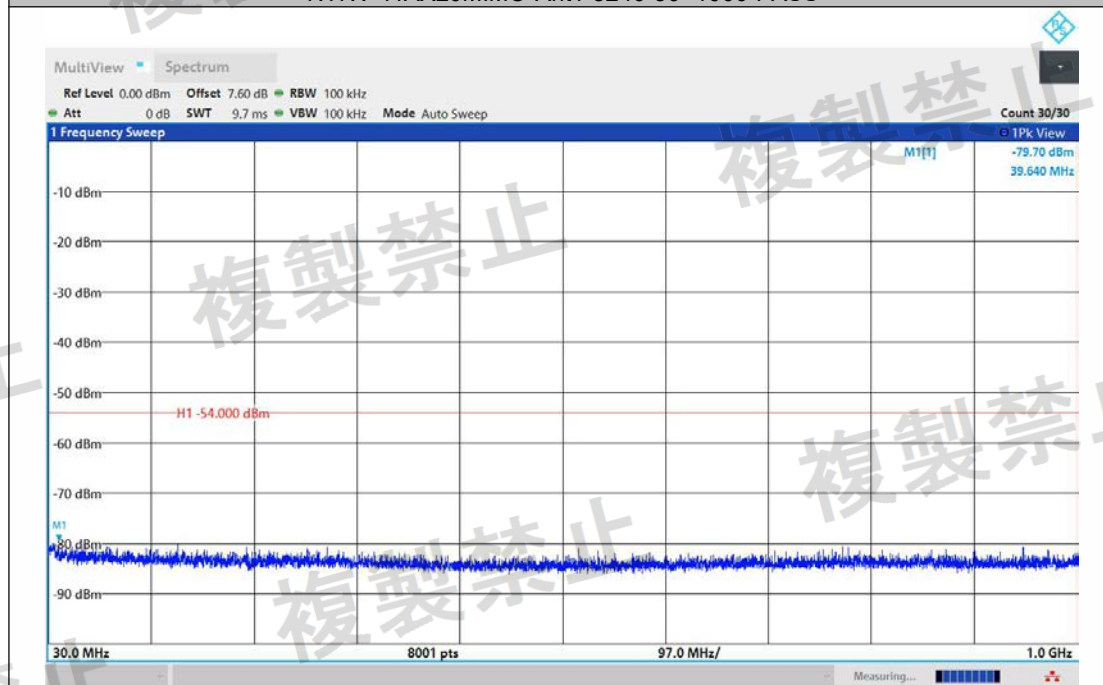


NTNV-11AX20MIMO-Ant2-5240-30~1000-PASS

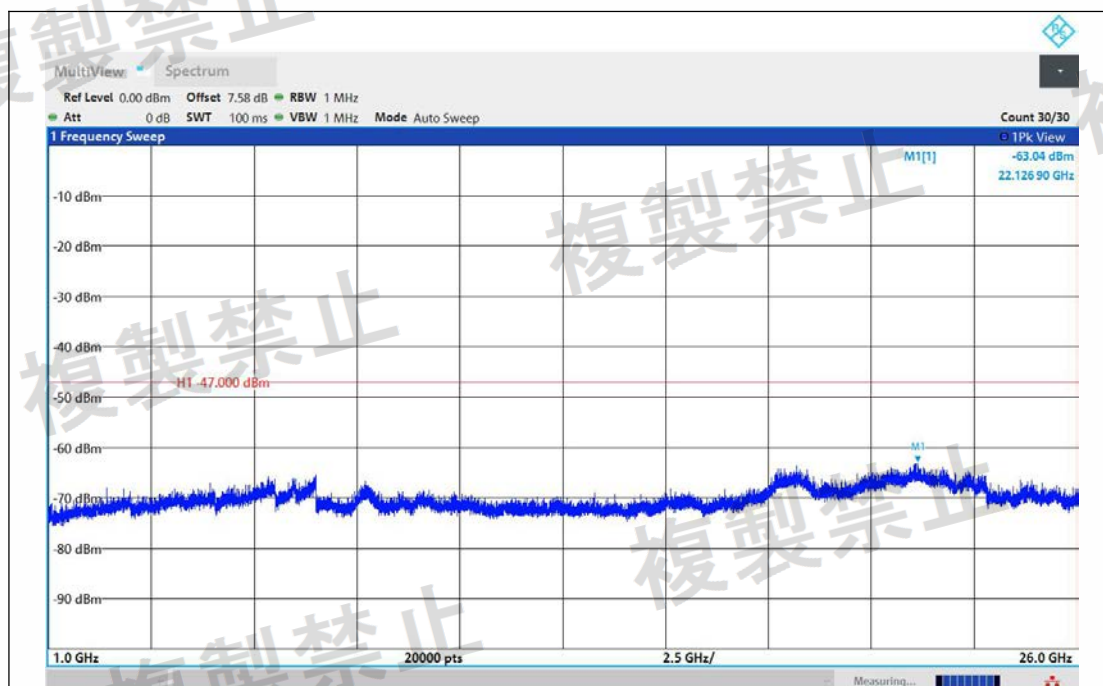


NTVN-11AX20MIMO-Ant1-5240-1000~26000-PASS

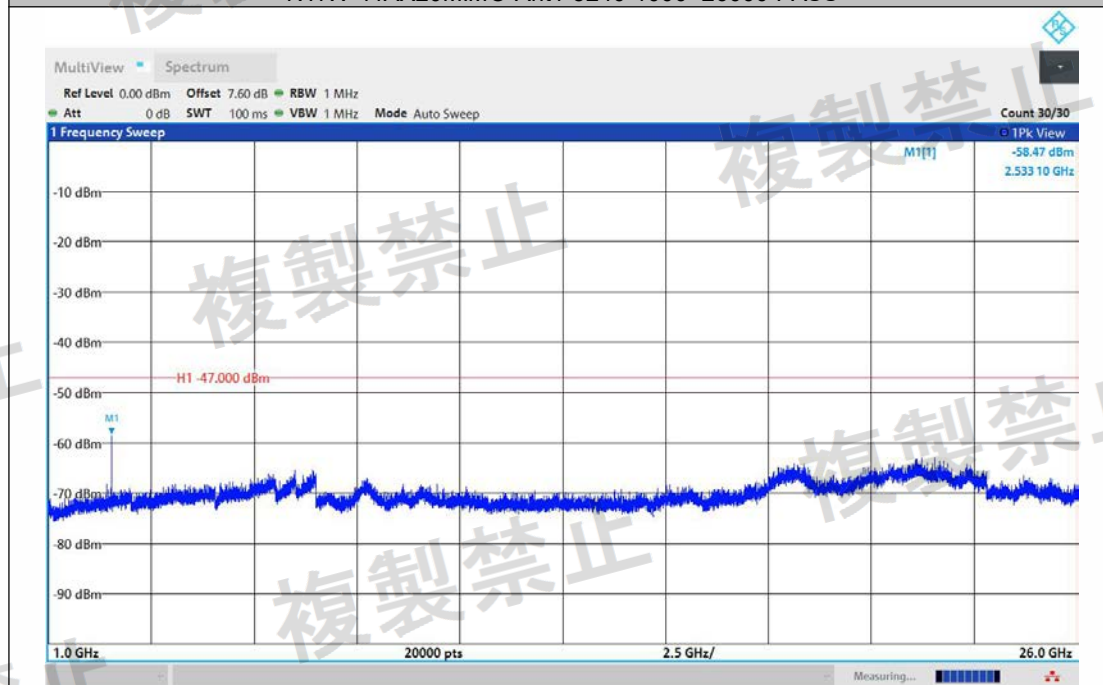


NTVN-11AX20MIMO-Ant2-5240-1000~26000-PASS

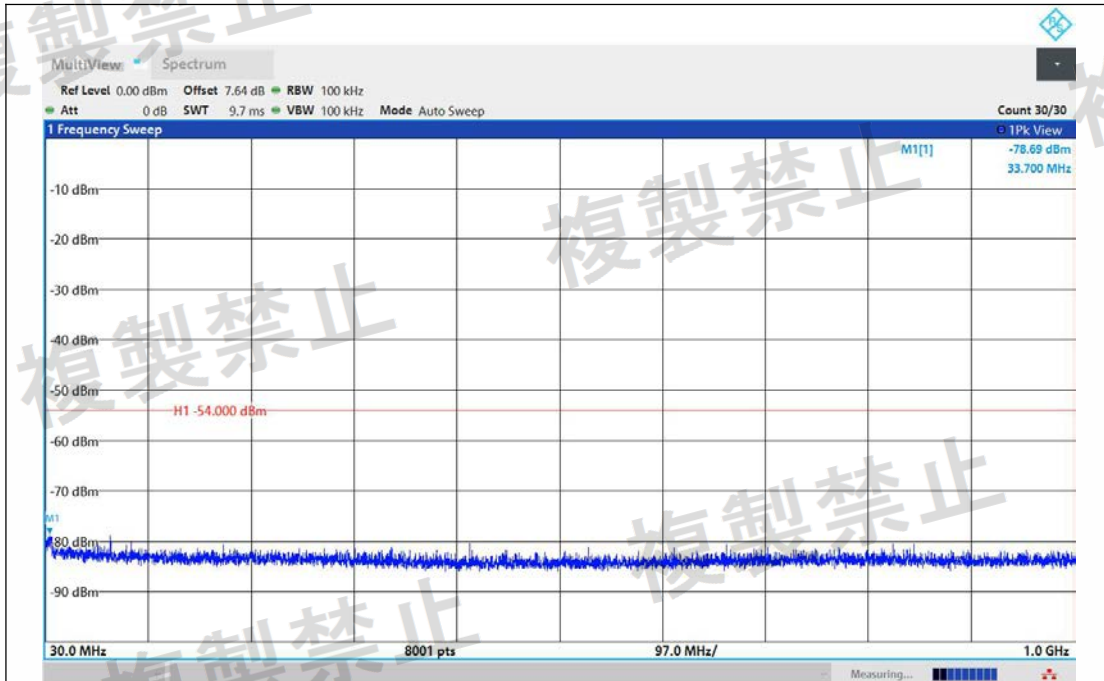


NTNV-11AX20MIMO-Ant1-5260-30~1000-PASS

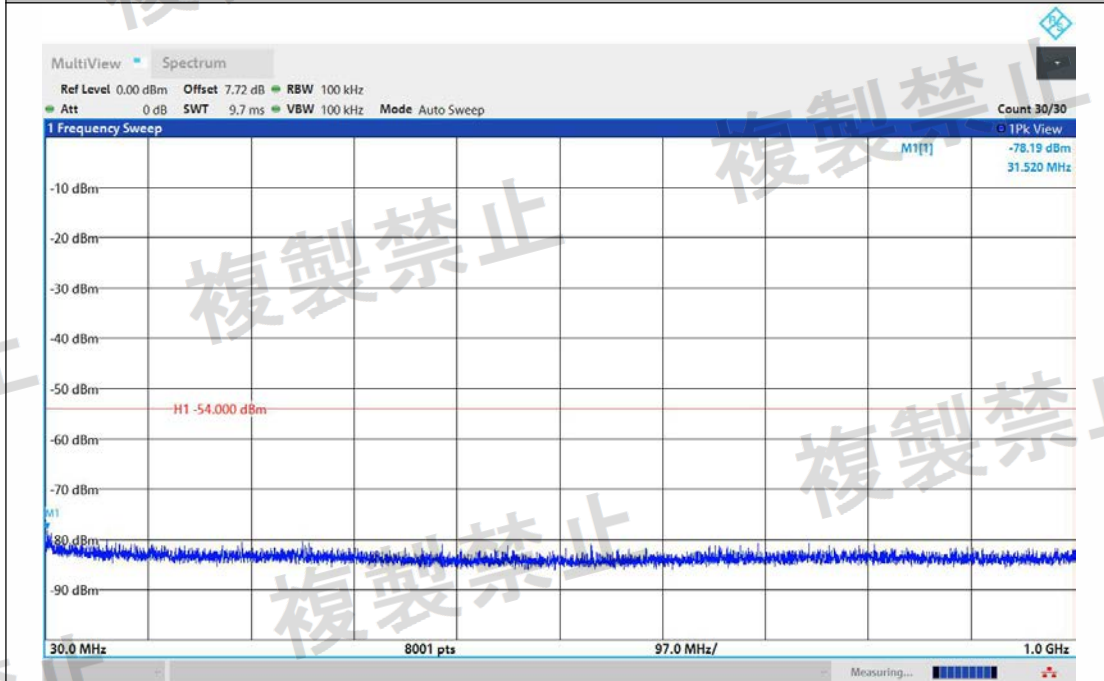


NTNV-11AX20MIMO-Ant2-5260-30~1000-PASS

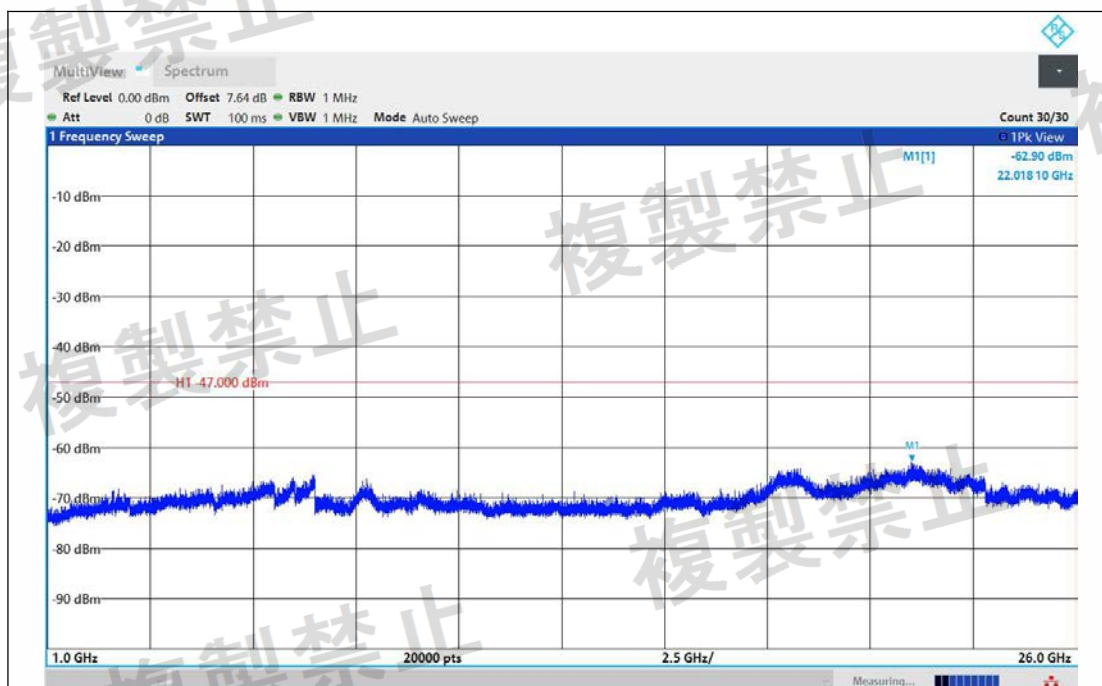


NTNV-11AX20MIMO-Ant1-5260-1000~26000-PASS

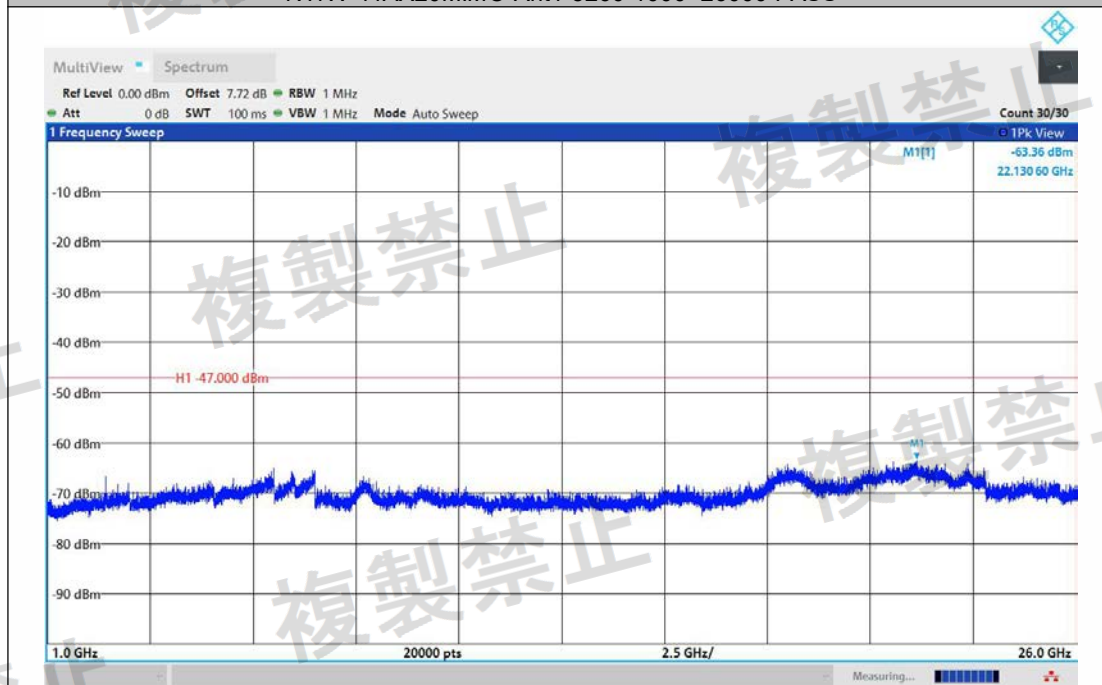



NTNV-11AX20MIMO-Ant2-5260-1000~26000-PASS

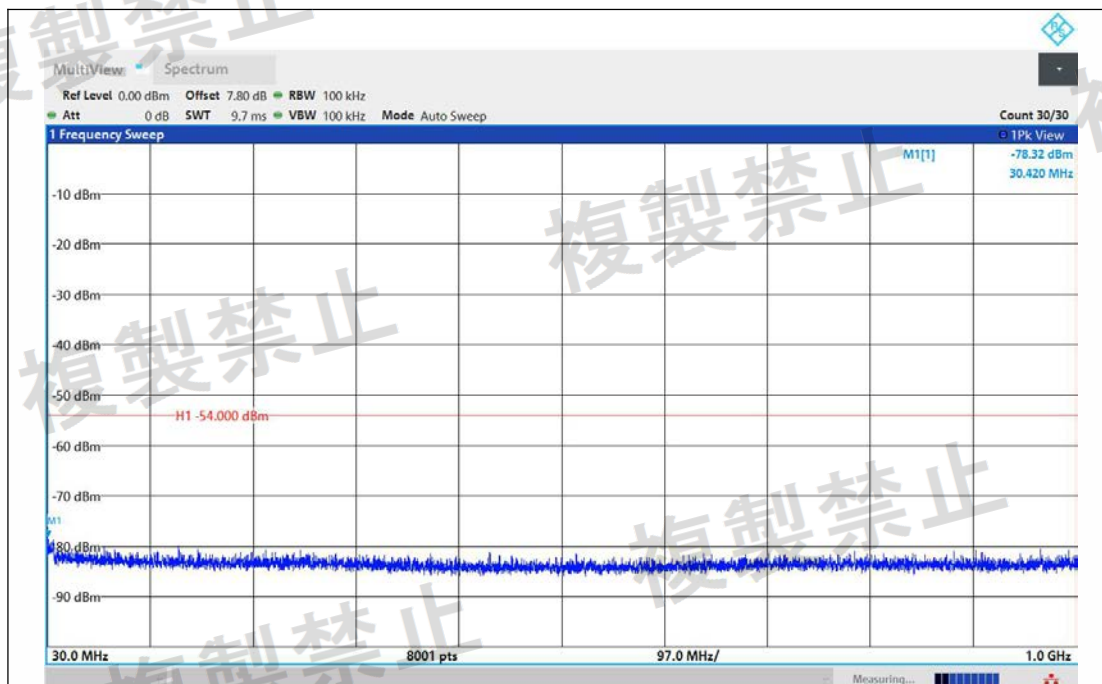


NTNV-11AX20MIMO-Ant1-5280-30~1000-PASS

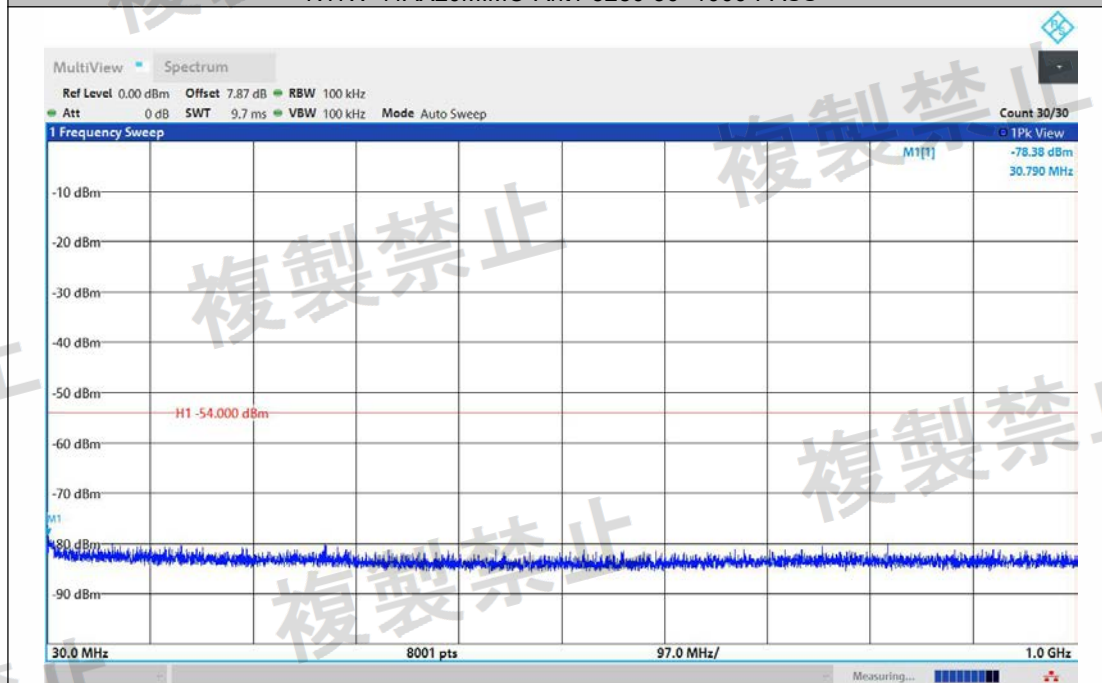


NTNV-11AX20MIMO-Ant2-5280-30~1000-PASS

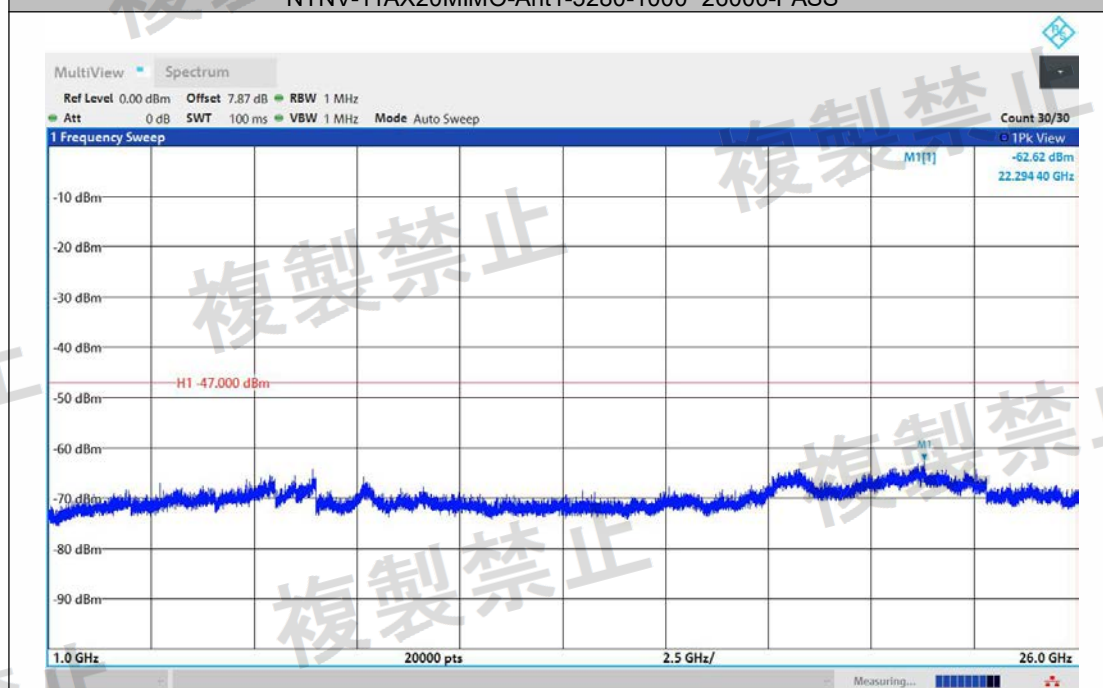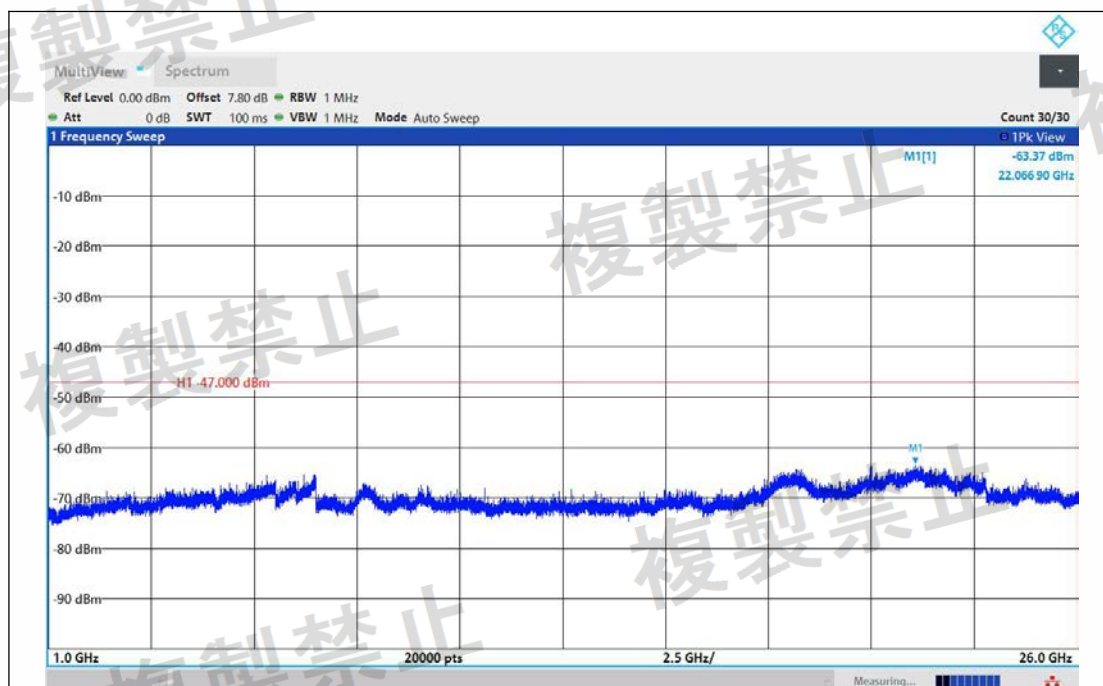

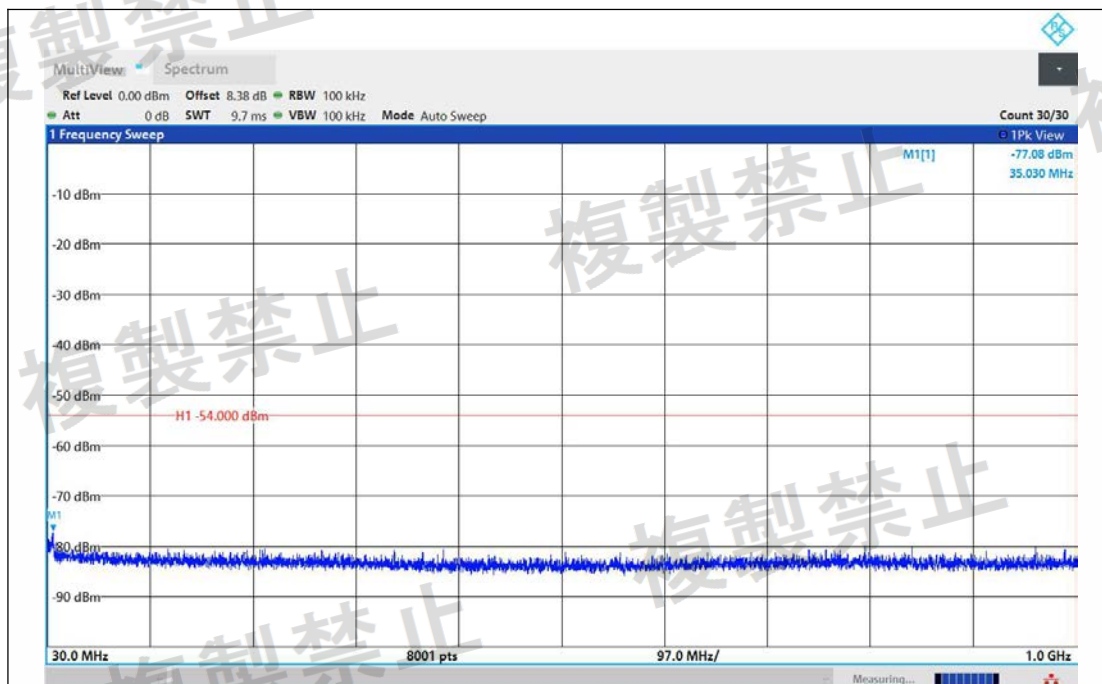

NTNV-11AX20MIMO-Ant1-5320-30~1000-PASS

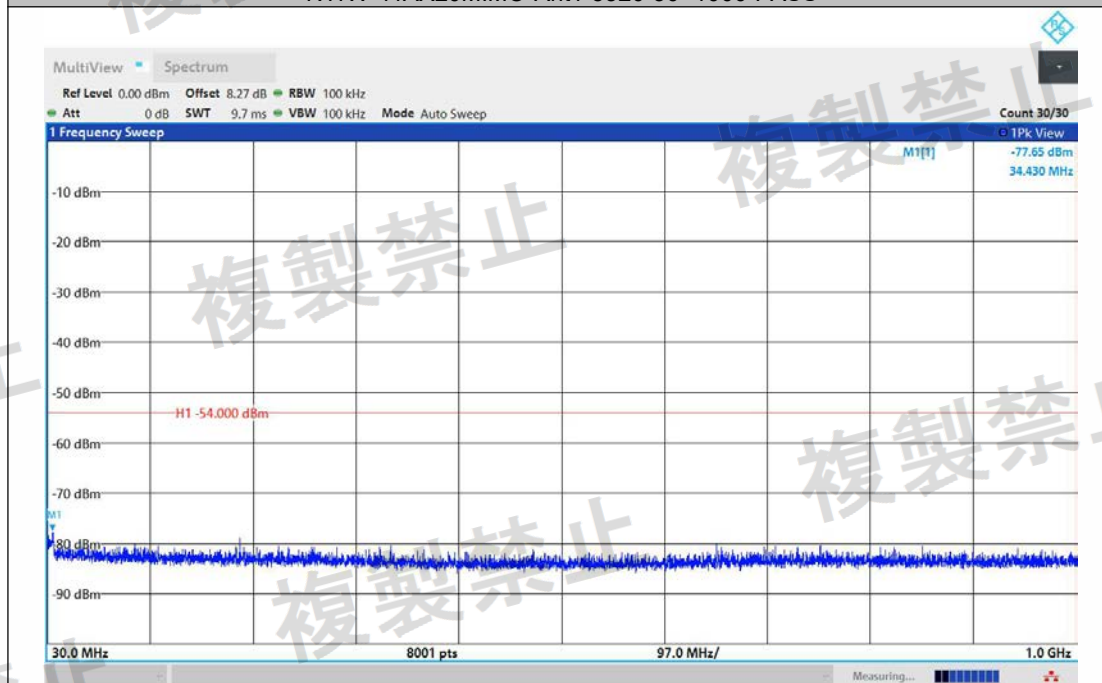

NTNV-11AX20MIMO-Ant2-5320-30~1000-PASS