


Site: AC1	Time: 2019/01/31 - 21:00
Limit: NCC LP0002_1GHz-40GHz 68.2	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5670MHz (CDD Mode)	

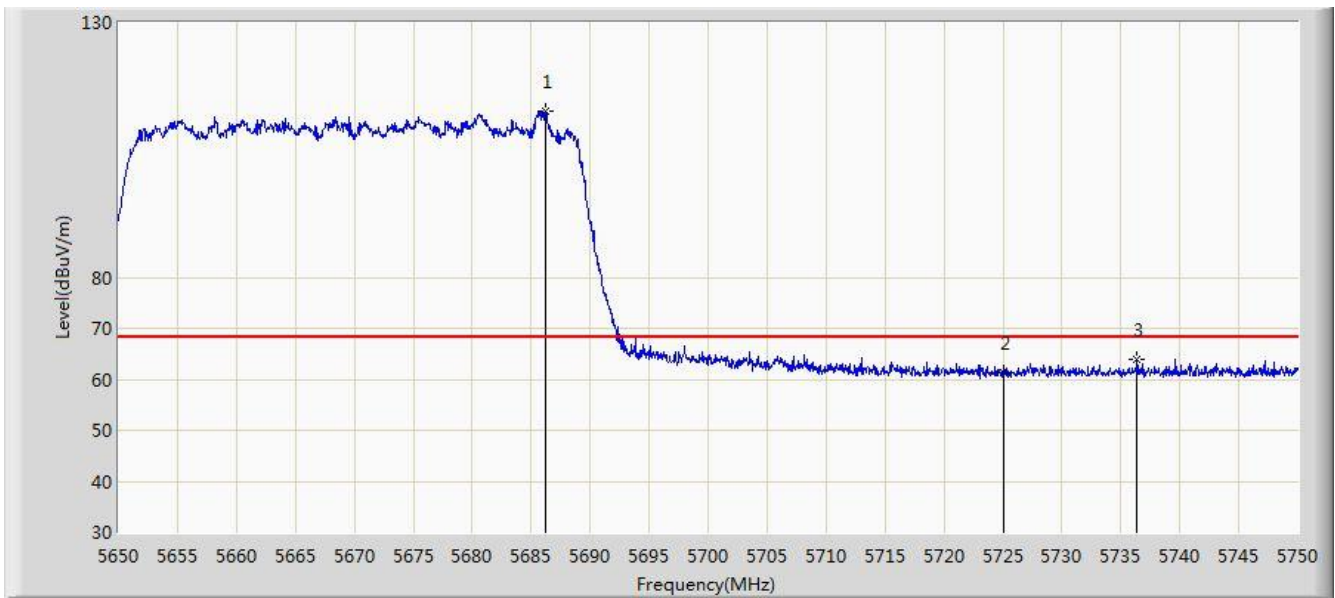


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5686.200	112.497	107.685	N/A	N/A	4.812	PK
2			5725.000	61.317	56.288	-6.883	68.200	5.029	PK
3			5736.400	63.909	58.807	-4.291	68.200	5.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5670MHz (CDD Mode)	

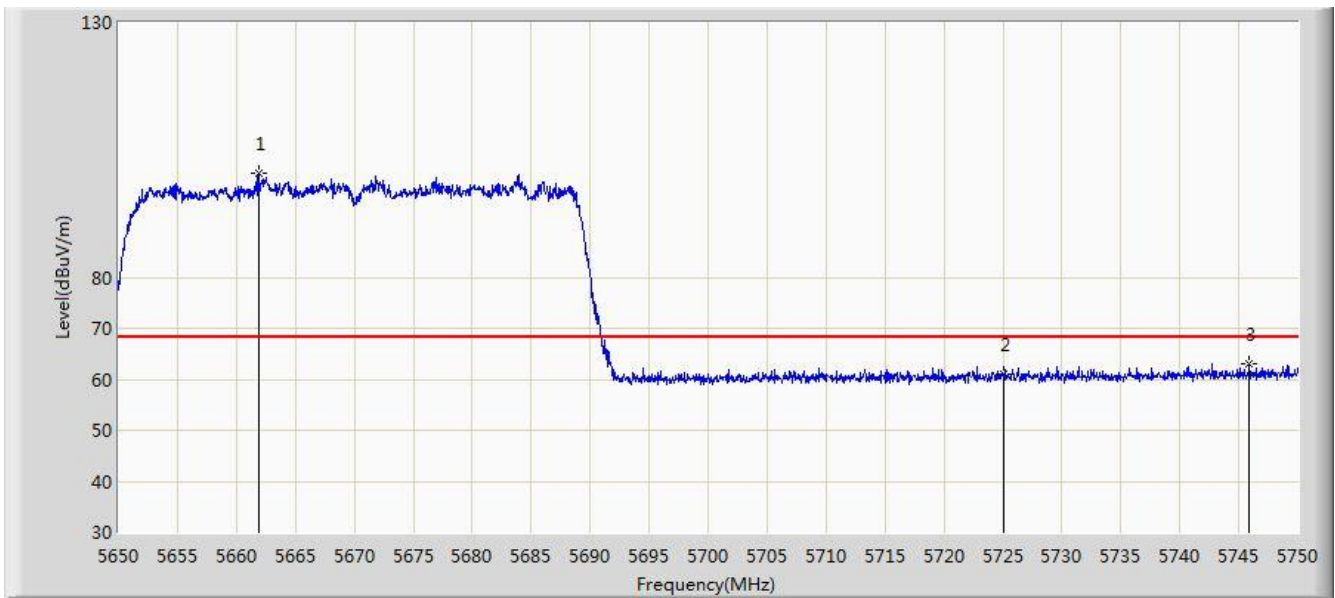


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.950	100.409	95.694	N/A	N/A	4.714	PK
2			5725.000	60.980	55.951	-7.220	68.200	5.029	PK
3			5745.900	62.917	57.757	-5.283	68.200	5.159	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode)	

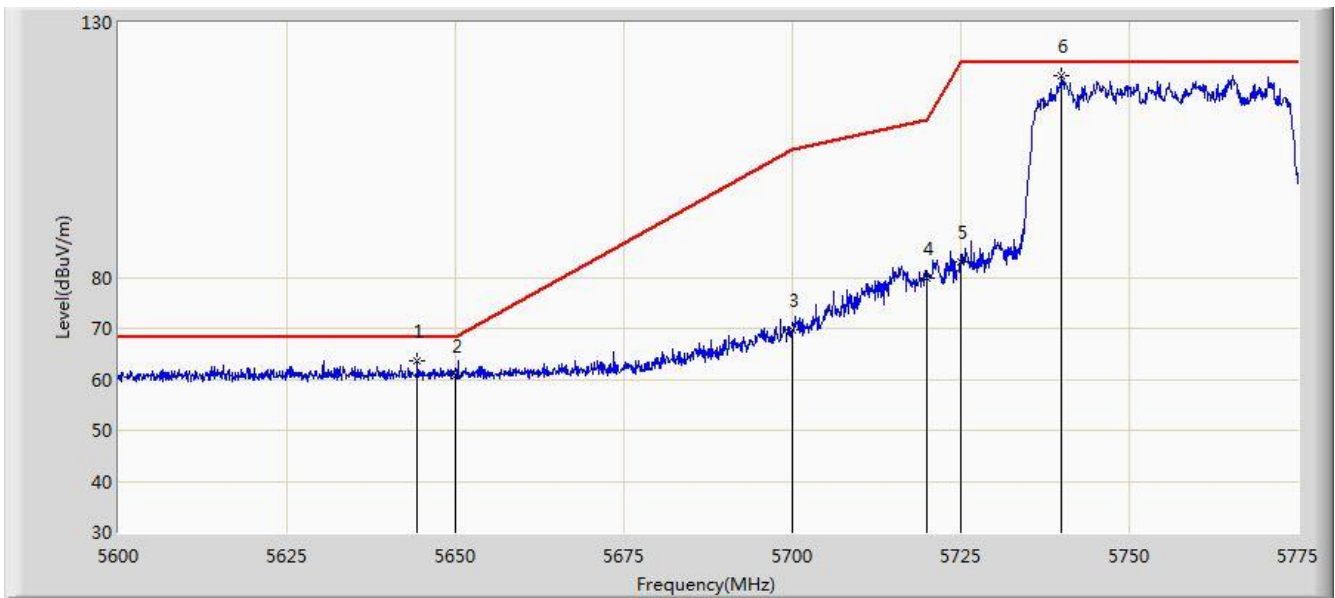


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.362	63.684	59.032	-4.516	68.200	4.652	PK
2			5650.000	60.755	56.084	-7.445	68.200	4.671	PK
3			5700.000	69.649	64.771	-35.551	105.200	4.878	PK
4			5720.000	79.973	74.976	-30.827	110.800	4.997	PK
5			5725.000	83.126	78.097	-39.074	122.200	5.029	PK
6		*	5740.000	119.462	114.337	N/A	N/A	5.125	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode)	

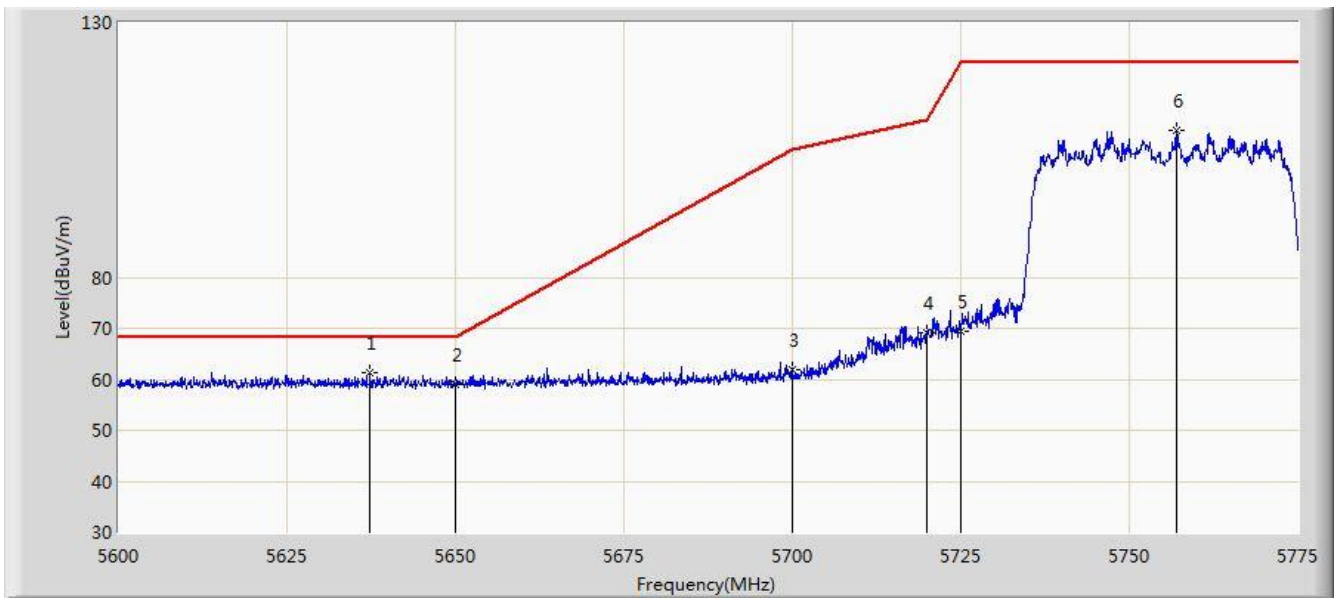


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.275	61.234	56.604	-6.966	68.200	4.630	PK
2			5650.000	58.947	54.276	-9.253	68.200	4.671	PK
3			5700.000	61.790	56.912	-43.410	105.200	4.878	PK
4			5720.000	69.213	64.216	-41.587	110.800	4.997	PK
5			5725.000	69.422	64.393	-52.778	122.200	5.029	PK
6			5756.975	108.702	103.479	N/A	N/A	5.222	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode)	

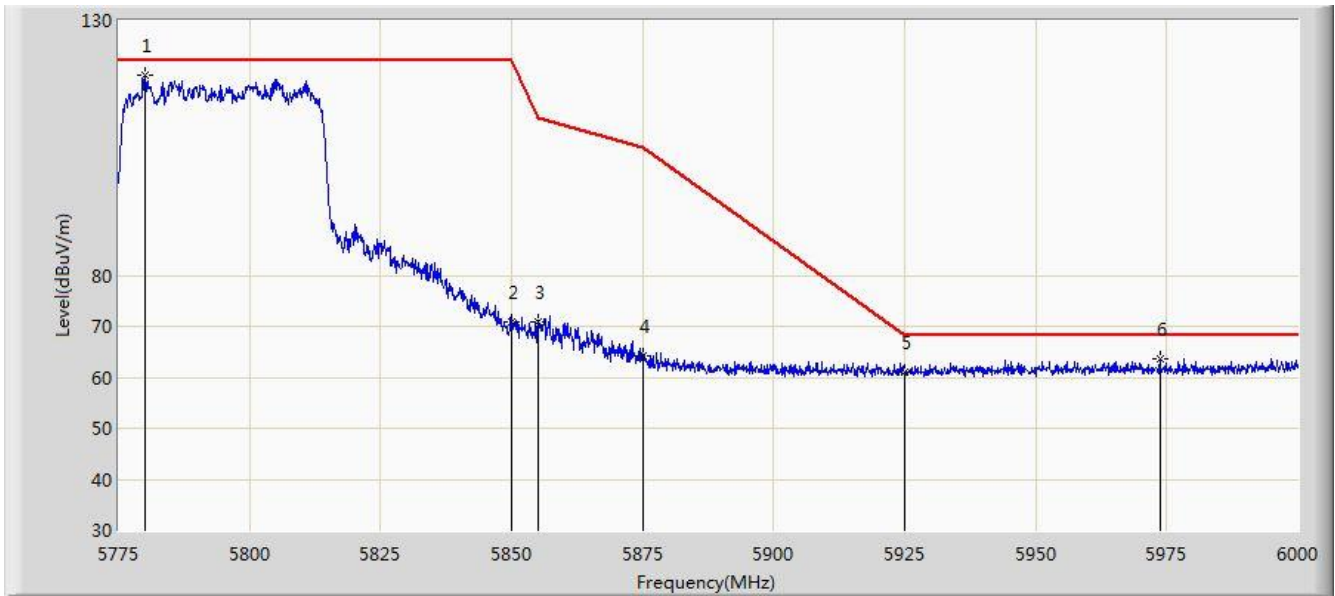


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5780.175	119.268	113.926	N/A	N/A	5.343	PK
2			5850.000	70.881	65.155	-51.319	122.200	5.726	PK
3			5855.000	70.826	65.080	-39.974	110.800	5.746	PK
4			5875.000	64.243	58.423	-40.957	105.200	5.820	PK
5			5925.000	60.903	54.937	-7.297	68.200	5.967	PK
6			5973.675	63.641	57.574	-4.559	68.200	6.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode)	

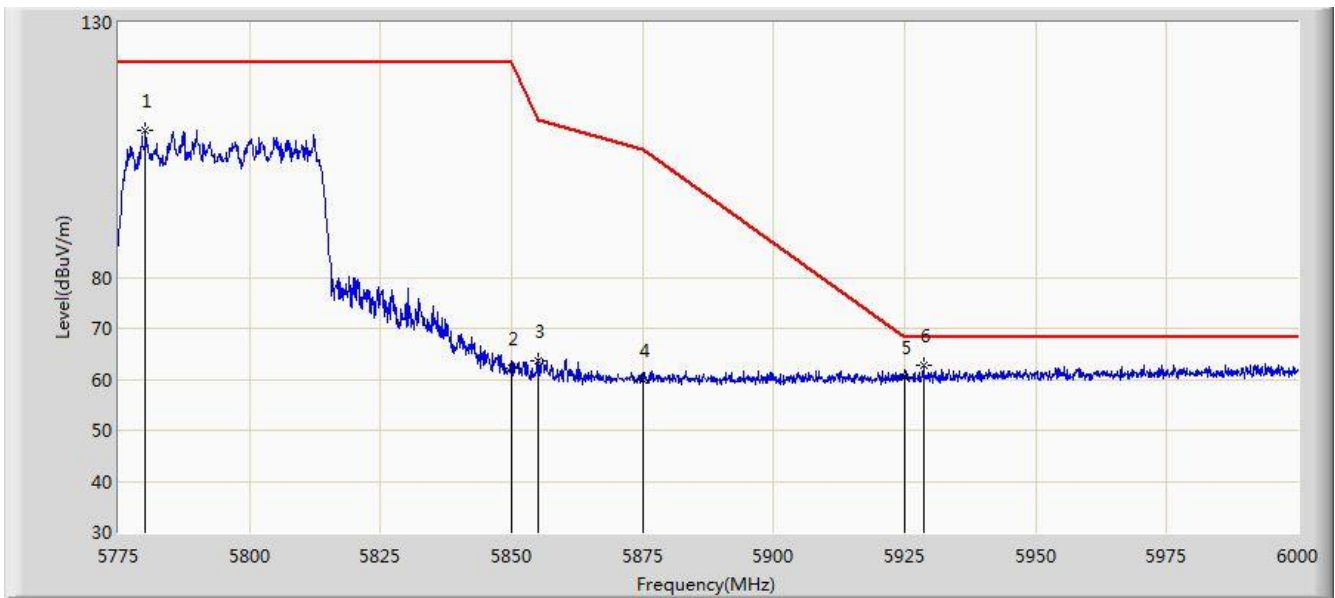


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5780.175	108.962	103.620	N/A	N/A	5.343	PK
2			5850.000	62.044	56.318	-60.156	122.200	5.726	PK
3			5855.000	63.589	57.843	-47.211	110.800	5.746	PK
4			5875.000	59.923	54.103	-45.277	105.200	5.820	PK
5			5925.000	60.538	54.572	-7.662	68.200	5.967	PK
6		*	5928.562	62.615	56.640	-5.585	68.200	5.976	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

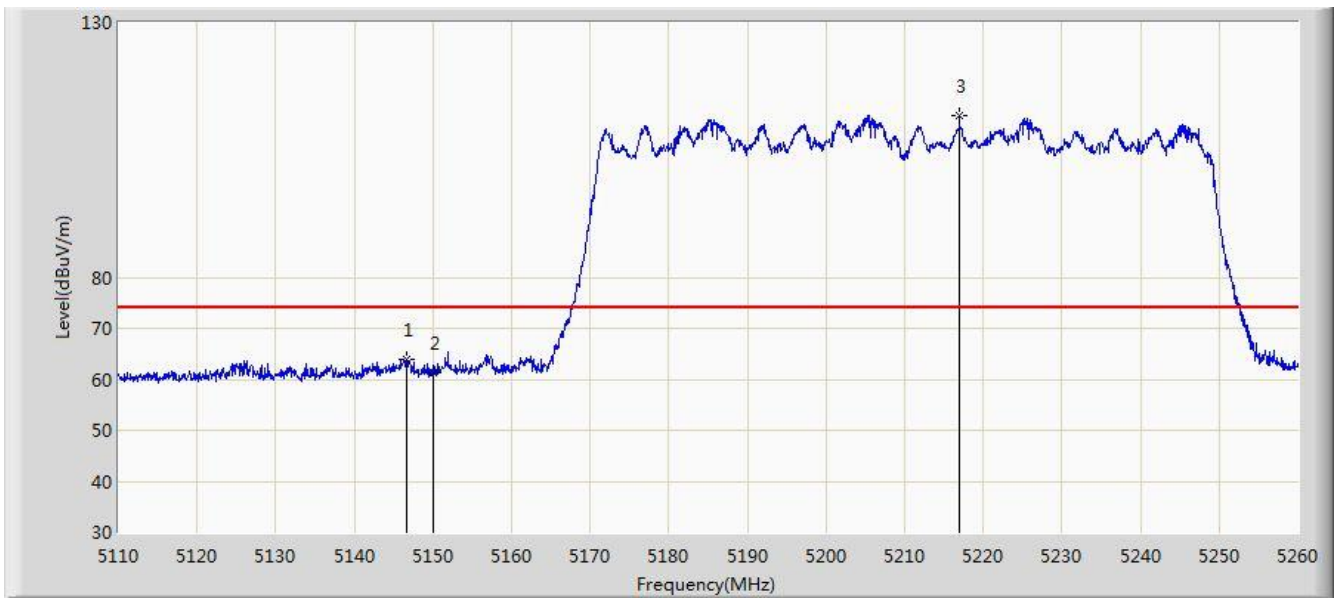


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.675	63.802	59.626	-10.198	74.000	4.176	PK
2			5150.000	61.352	57.183	-12.648	74.000	4.170	PK
3		*	5216.950	111.812	107.864	N/A	N/A	3.947	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

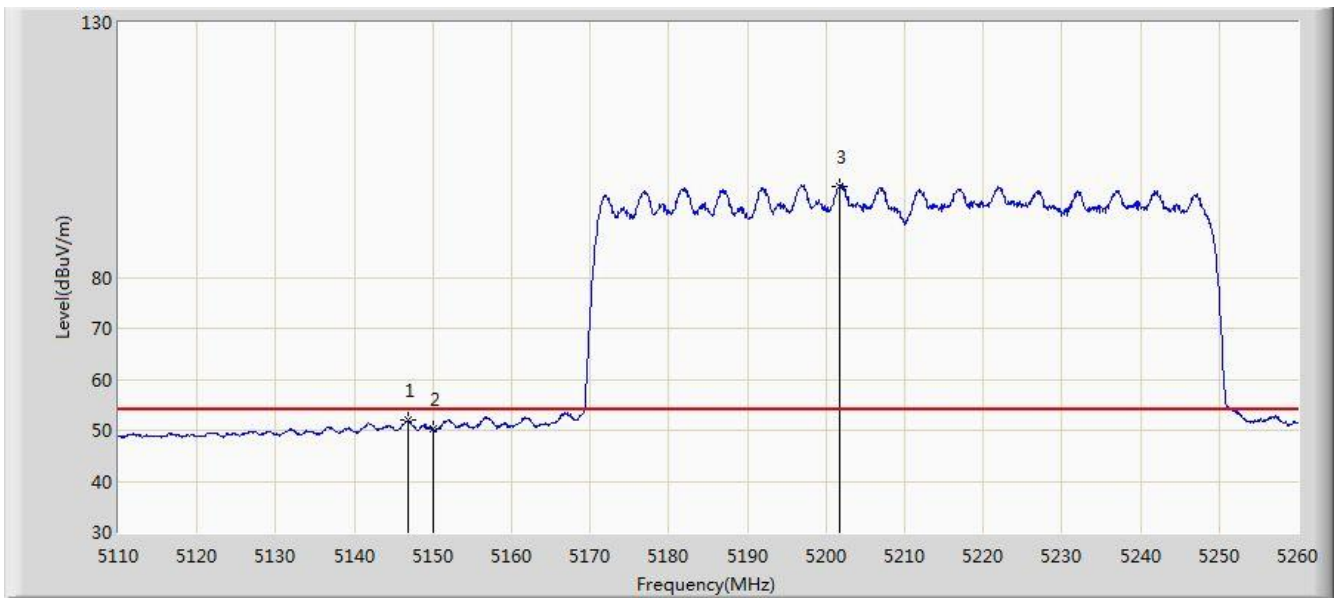


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.750	51.972	47.796	-2.028	54.000	4.176	AV
2			5150.000	50.165	45.996	-3.835	54.000	4.170	AV
3		*	5201.725	97.900	93.907	N/A	N/A	3.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

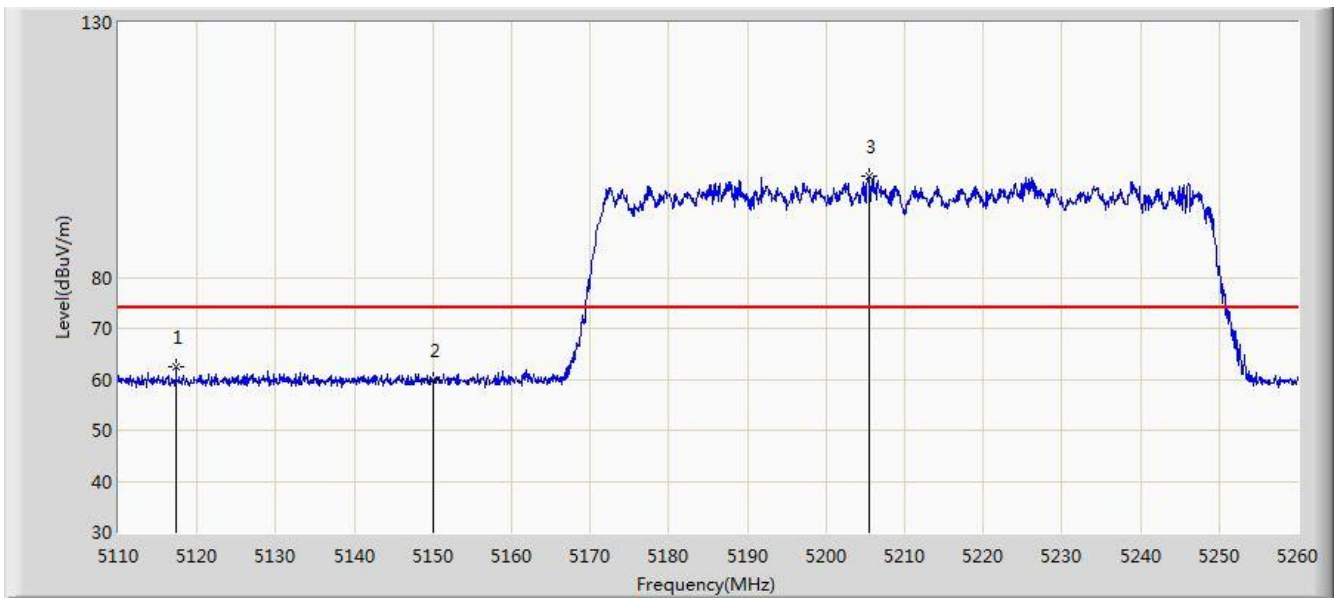


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5117.350	62.395	58.220	-11.605	74.000	4.174	PK
2			5150.000	59.745	55.576	-14.255	74.000	4.170	PK
3		*	5205.400	99.789	95.807	N/A	N/A	3.983	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

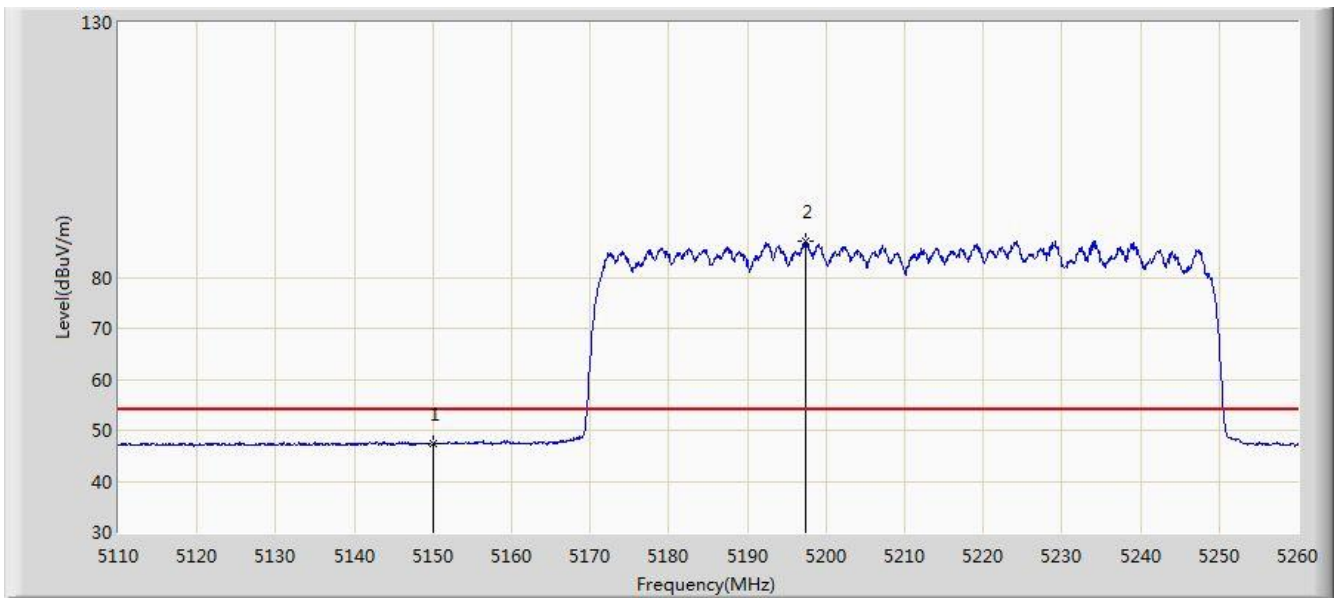


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.351	43.182	-6.649	54.000	4.170	AV
2		*	5197.450	87.058	83.051	N/A	N/A	4.006	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

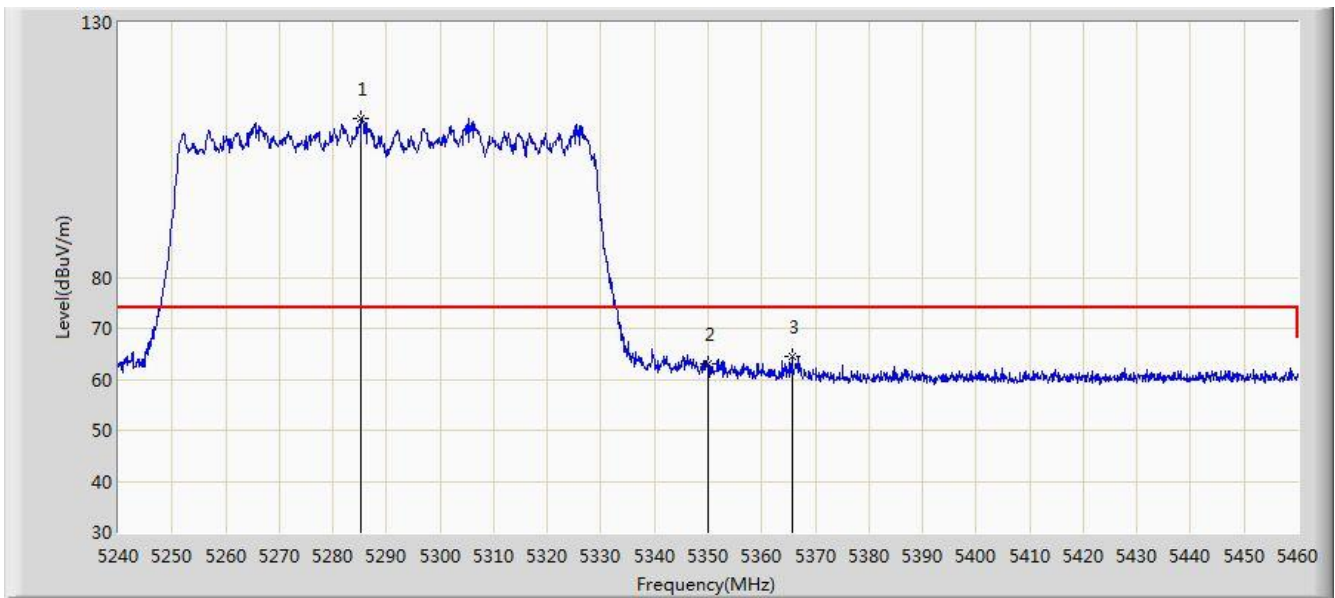


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5285.320	111.084	107.261	N/A	N/A	3.823	PK
2			5350.000	63.108	59.203	-10.892	74.000	3.904	PK
3			5365.730	64.491	60.558	-9.509	74.000	3.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

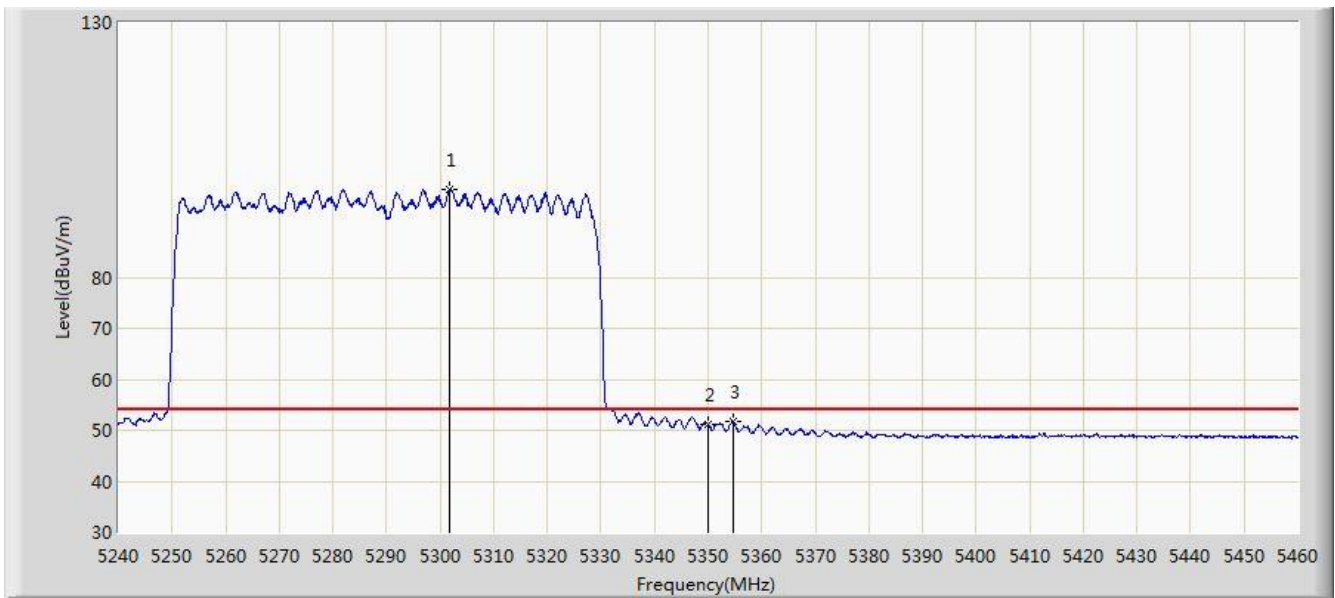


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.820	97.333	93.519	N/A	N/A	3.814	AV
2			5350.000	51.053	47.148	-2.947	54.000	3.904	AV
3			5354.620	51.650	47.737	-2.350	54.000	3.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

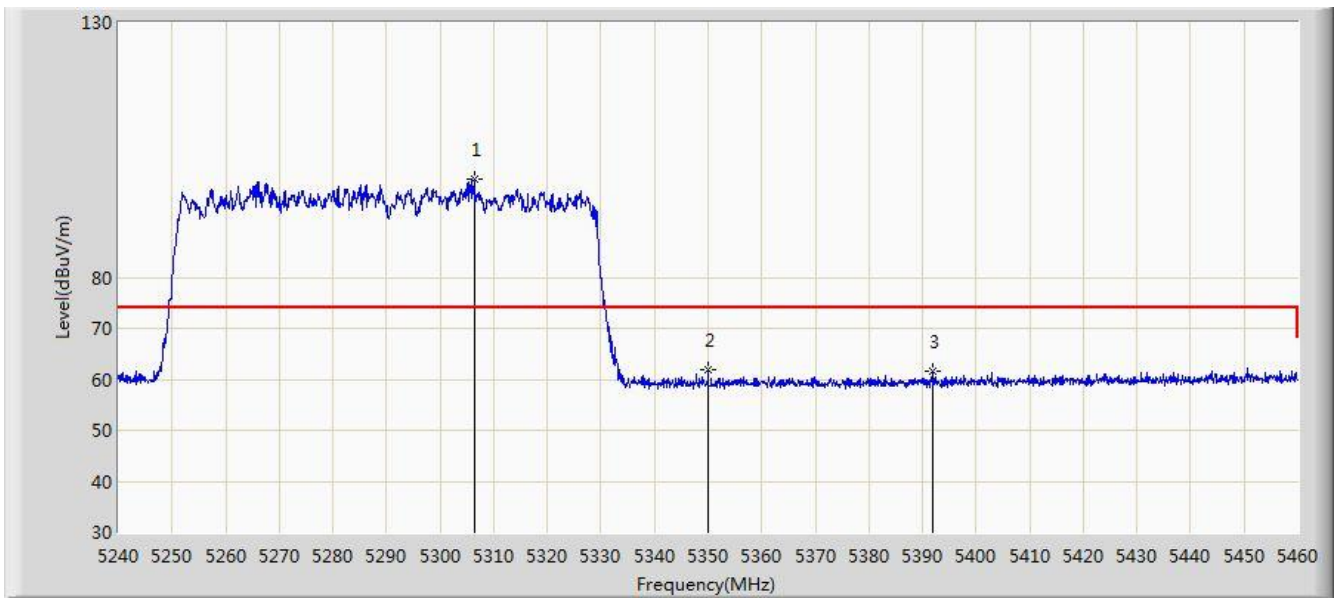


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.330	99.190	95.367	N/A	N/A	3.823	PK
2			5350.000	61.925	58.020	-12.075	74.000	3.904	PK
3			5391.910	61.627	57.645	-12.373	74.000	3.981	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

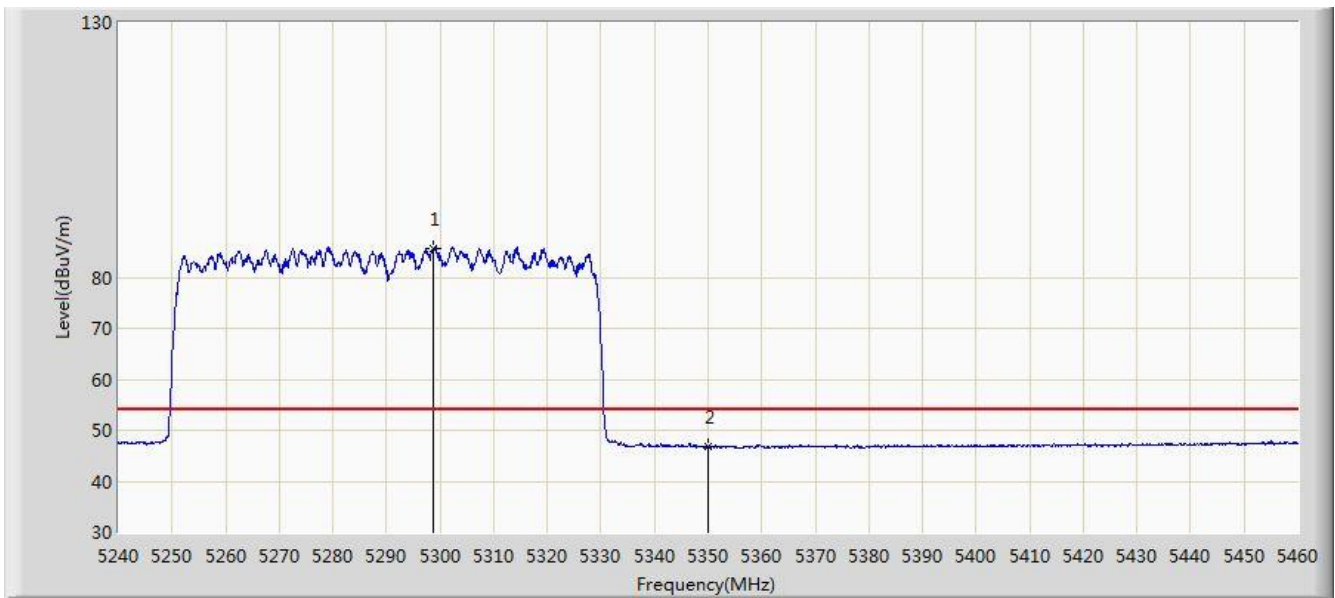


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.850	85.771	81.957	N/A	N/A	3.814	AV
2			5350.000	46.686	42.781	-7.314	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

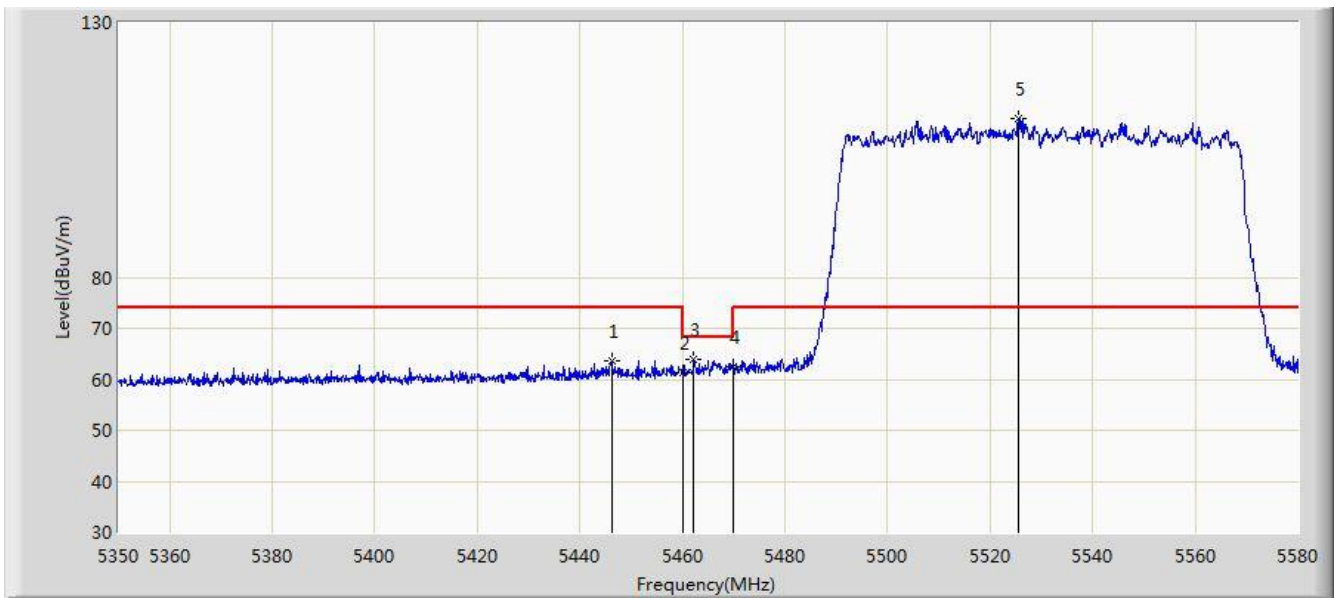


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.255	63.583	59.440	-10.417	74.000	4.143	PK
2			5460.000	61.292	57.112	-12.708	74.000	4.180	PK
3			5462.240	63.966	59.781	-4.234	68.200	4.185	PK
4			5470.000	62.506	58.304	-5.694	68.200	4.202	PK
5		*	5525.490	111.251	106.903	N/A	N/A	4.348	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

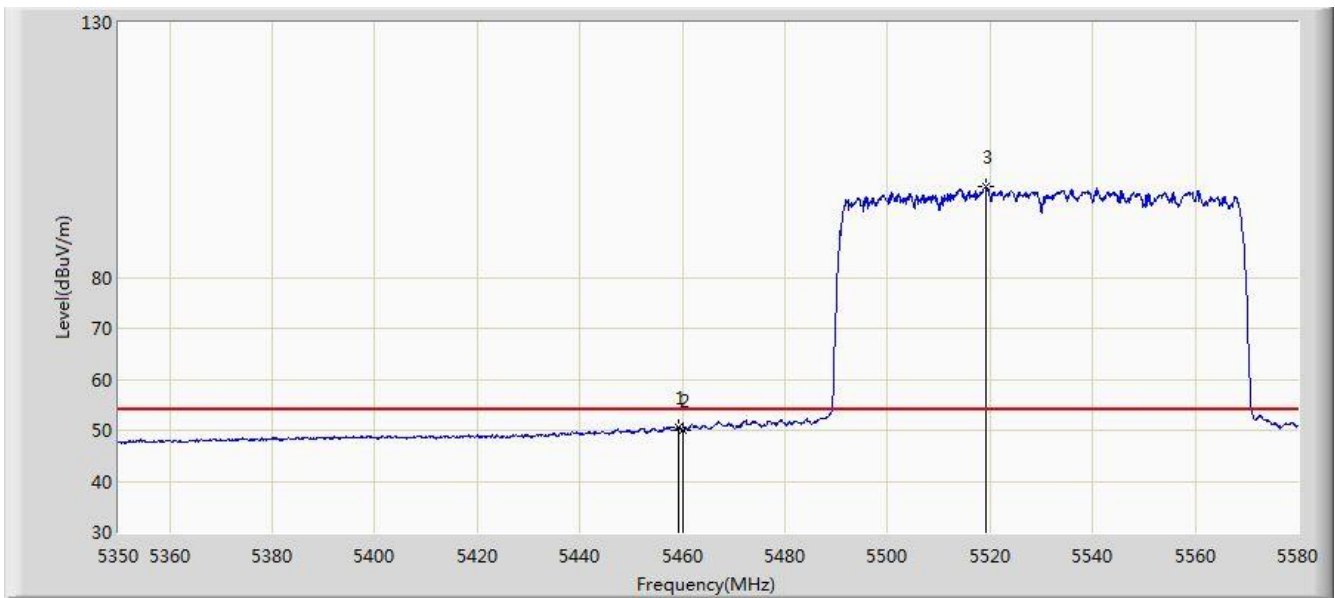


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.135	50.649	46.471	-3.351	54.000	4.178	AV
2			5460.000	50.006	45.826	-3.994	54.000	4.180	AV
3		*	5519.165	97.751	93.423	N/A	N/A	4.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

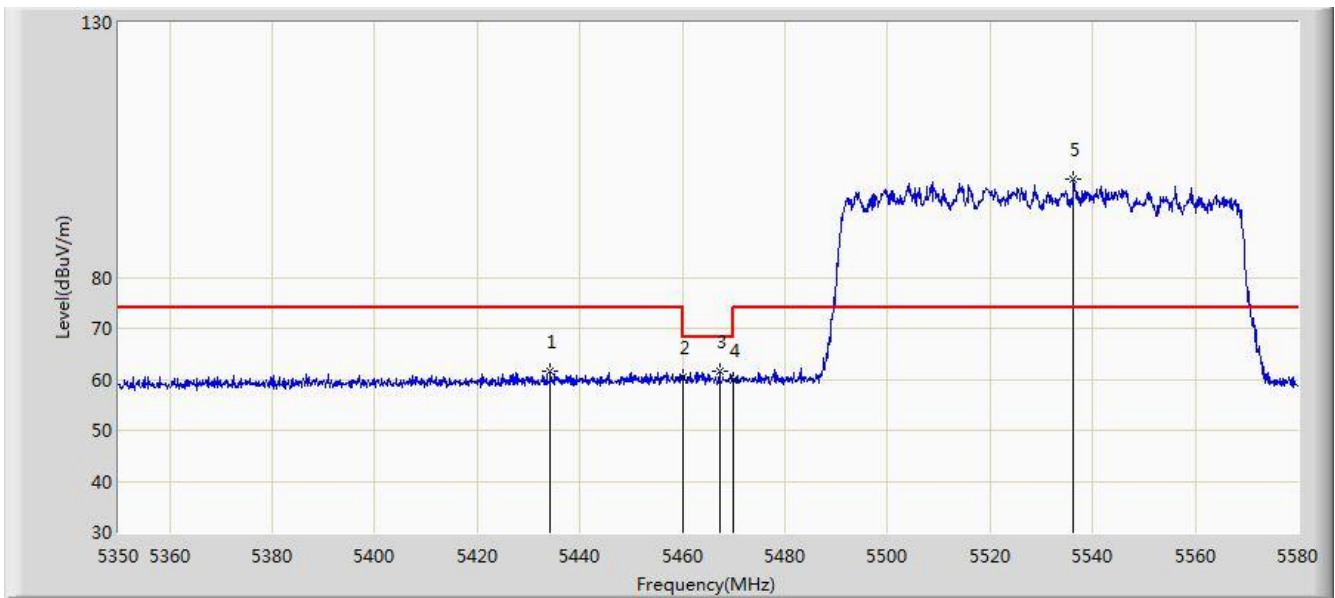


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5434.295	61.533	57.426	-12.467	74.000	4.107	PK
2			5460.000	60.448	56.268	-13.552	74.000	4.180	PK
3			5467.185	61.603	57.407	-6.597	68.200	4.196	PK
4			5470.000	59.940	55.738	-8.260	68.200	4.202	PK
5		*	5536.300	99.286	94.906	N/A	N/A	4.381	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

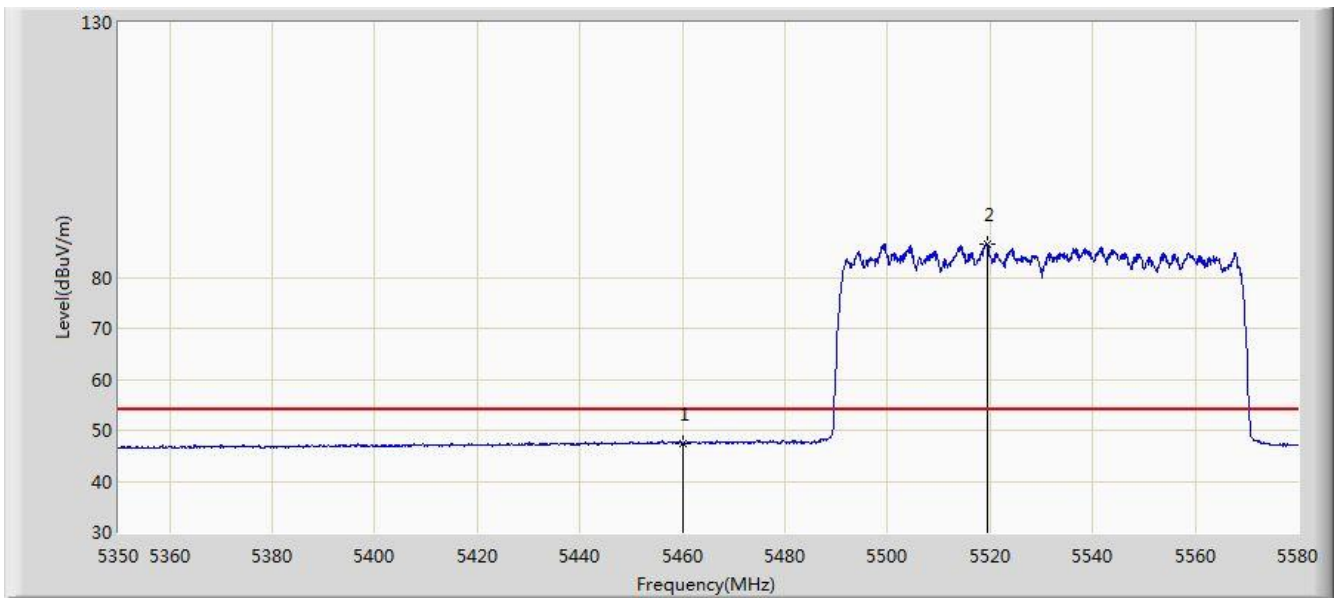


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.429	43.249	-6.571	54.000	4.180	AV
2		*	5519.395	86.645	82.316	N/A	N/A	4.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5610MHz (CDD Mode)	

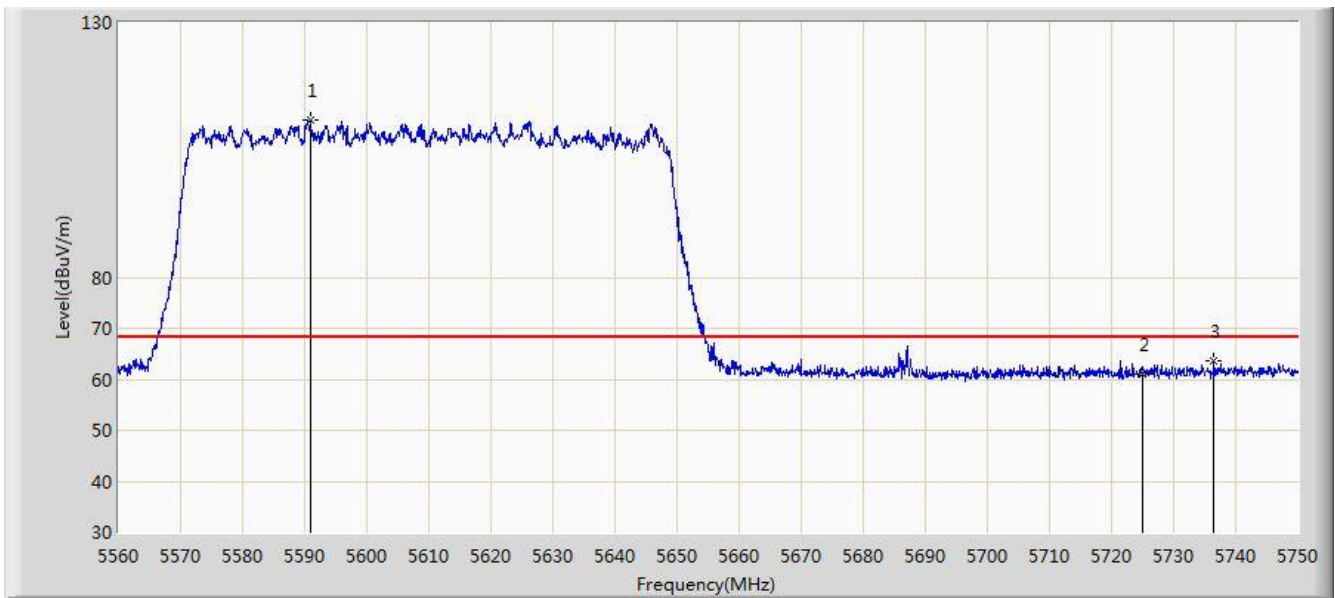


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5590.970	110.982	106.477	N/A	N/A	4.505	PK
2			5725.000	61.156	56.127	-7.044	68.200	5.029	PK
3			5736.510	63.594	58.492	-4.606	68.200	5.102	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5610MHz (CDD Mode)	

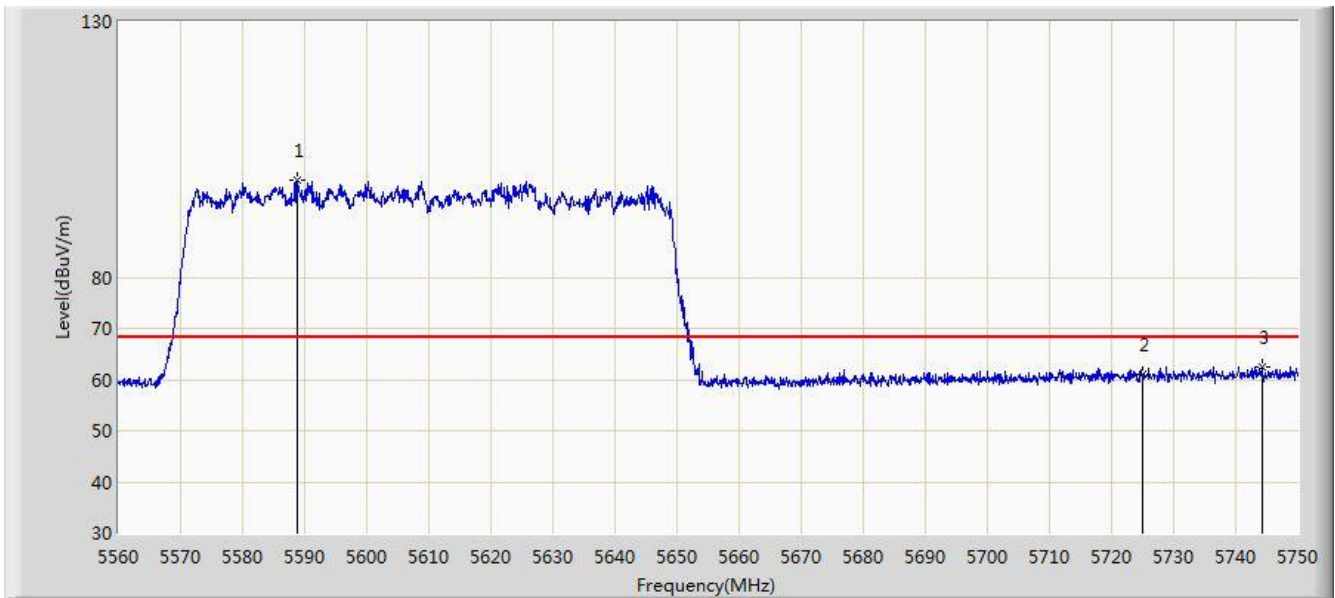


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5588.880	99.074	94.573	N/A	N/A	4.500	PK
2			5725.000	61.036	56.007	-7.164	68.200	5.029	PK
3			5744.205	62.324	57.174	-5.876	68.200	5.151	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode)	

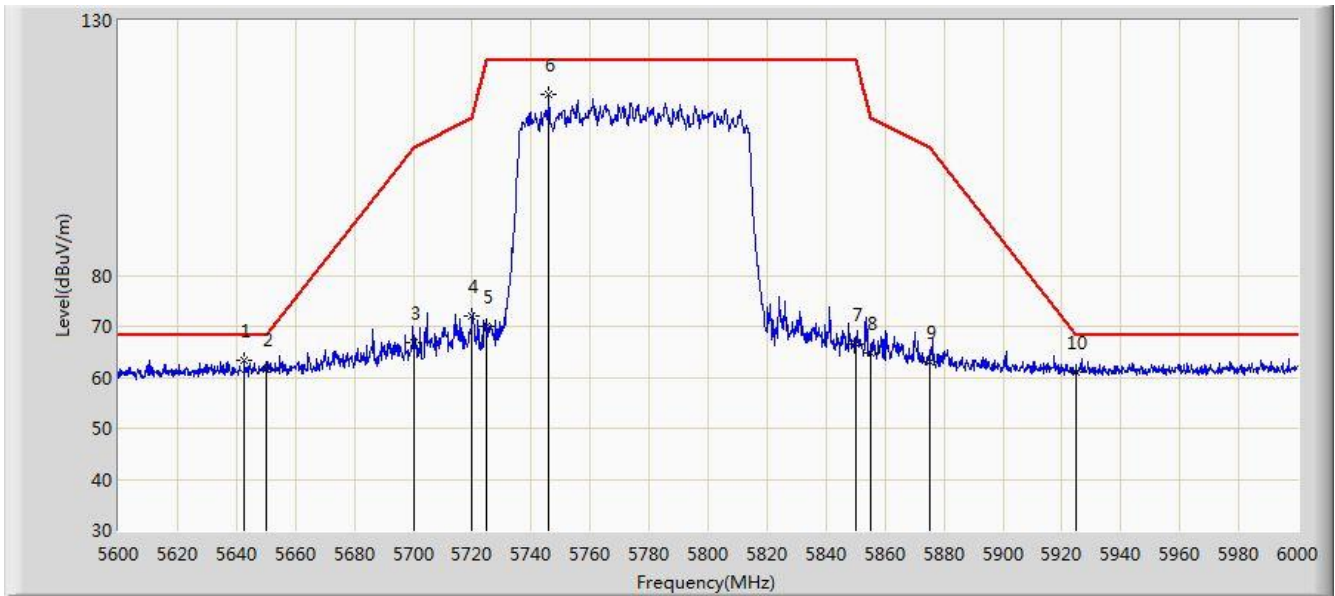


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.800	63.457	56.468	-4.743	68.200	6.989	PK
2			5650.000	61.661	56.990	-6.539	68.200	4.671	PK
3			5700.000	66.840	61.962	-38.360	105.200	4.878	PK
4			5720.000	71.979	66.982	-38.821	110.800	4.997	PK
5			5725.000	69.934	64.905	-52.266	122.200	5.029	PK
6			5746.000	115.493	110.332	N/A	N/A	5.161	PK
7			5850.000	66.572	60.846	-55.628	122.200	5.726	PK
8			5855.000	64.899	59.153	-45.901	110.800	5.746	PK
9			5875.000	63.116	57.296	-42.084	105.200	5.820	PK
10			5925.000	60.993	55.027	-7.207	68.200	5.967	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode)	

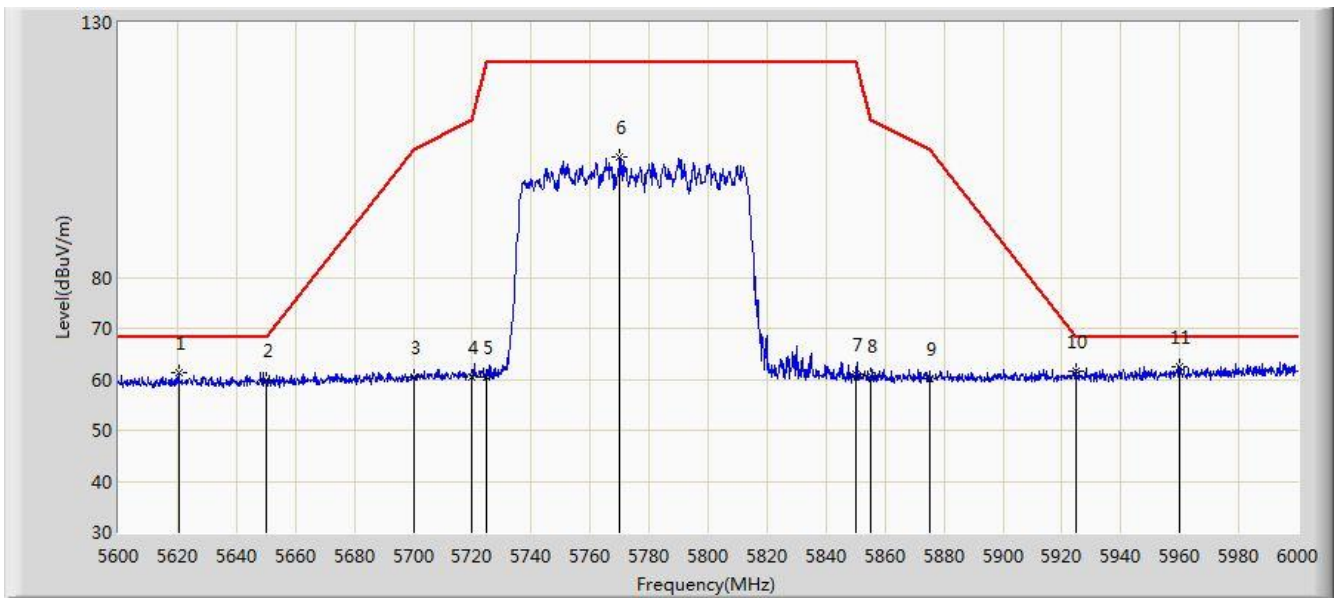


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5620.400	61.222	54.215	-6.978	68.200	7.007	PK
2			5650.000	59.913	55.242	-8.287	68.200	4.671	PK
3			5700.000	60.309	55.431	-44.891	105.200	4.878	PK
4			5720.000	60.376	55.379	-50.424	110.800	4.997	PK
5			5725.000	60.511	55.482	-61.689	122.200	5.029	PK
6			5770.000	103.510	98.219	N/A	N/A	5.291	PK
7			5850.000	60.970	55.244	-61.230	122.200	5.726	PK
8			5855.000	60.708	54.962	-50.092	110.800	5.746	PK
9			5875.000	60.173	54.353	-45.027	105.200	5.820	PK
10			5925.000	61.605	55.639	-6.595	68.200	5.967	PK
11		*	5959.800	62.507	56.464	-5.693	68.200	6.043	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5250MHz (CDD Mode)	

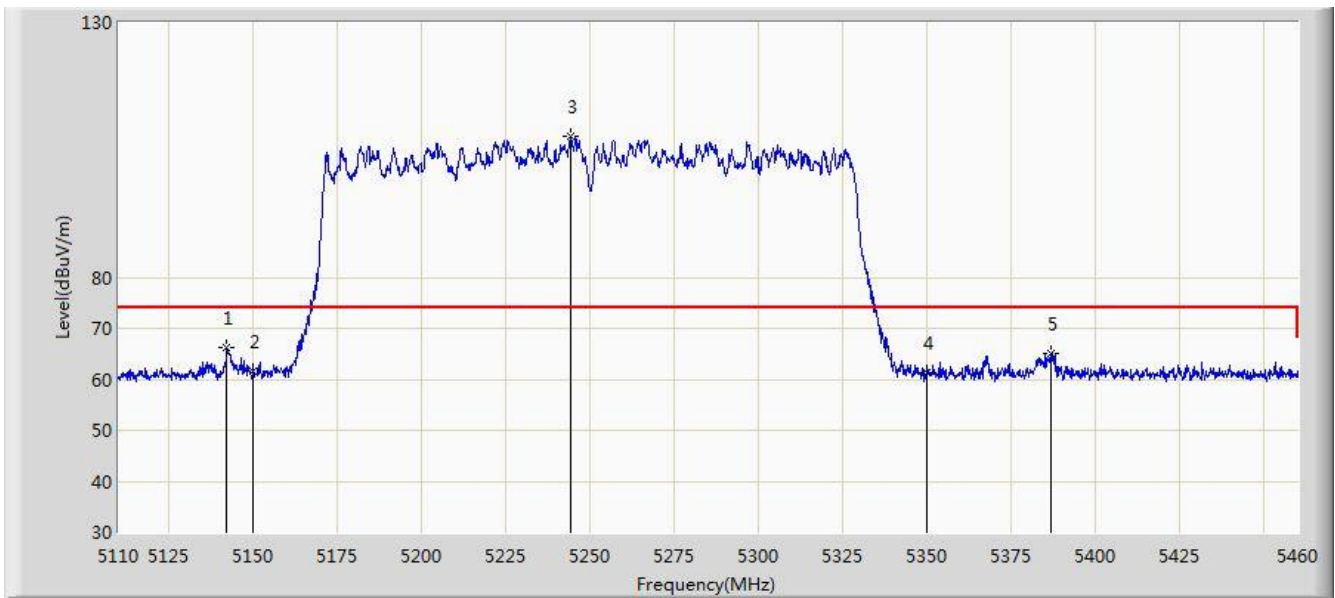


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.200	66.334	62.158	-7.666	74.000	4.175	PK
2			5150.000	61.645	57.476	-12.355	74.000	4.170	PK
3		*	5244.400	107.642	103.775	N/A	N/A	3.867	PK
4			5350.000	61.258	57.353	-12.742	74.000	3.904	PK
5			5386.675	64.963	60.991	-9.037	74.000	3.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5250MHz (CDD Mode)	

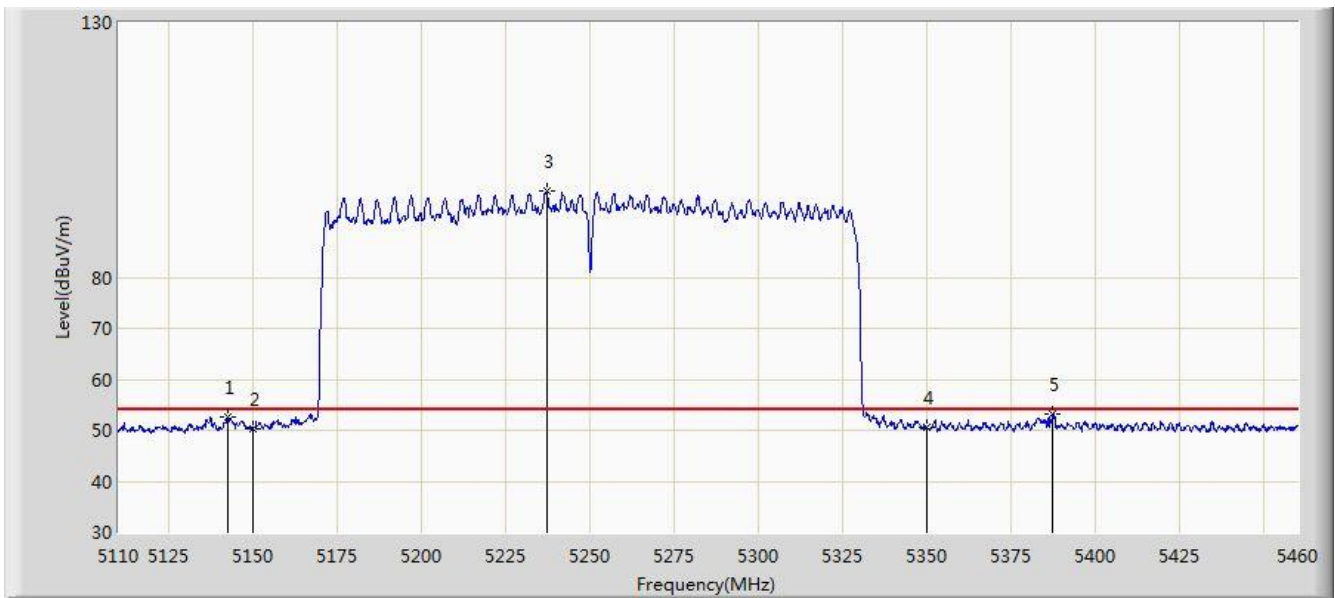


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.550	52.533	48.357	-1.467	54.000	4.175	AV
2			5150.000	50.420	46.251	-3.580	54.000	4.170	AV
3		*	5237.050	97.061	93.172	N/A	N/A	3.888	AV
4			5350.000	50.489	46.584	-3.511	54.000	3.904	AV
5			5387.375	53.201	49.228	-0.799	54.000	3.973	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5250MHz (CDD Mode)	

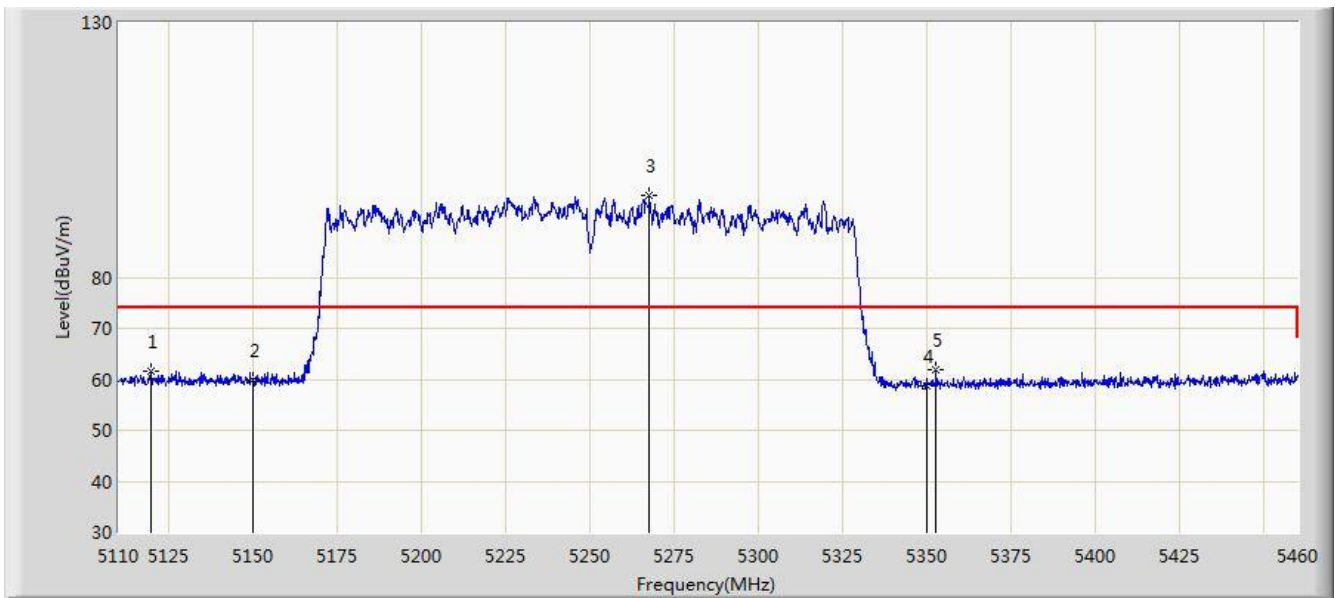


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5119.450	61.534	57.359	-12.466	74.000	4.175	PK
2			5150.000	59.728	55.559	-14.272	74.000	4.170	PK
3		*	5267.500	96.169	92.332	N/A	N/A	3.837	PK
4			5350.000	58.840	54.935	-15.160	74.000	3.904	PK
5			5352.725	61.840	57.930	-12.160	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5250MHz (CDD Mode)	

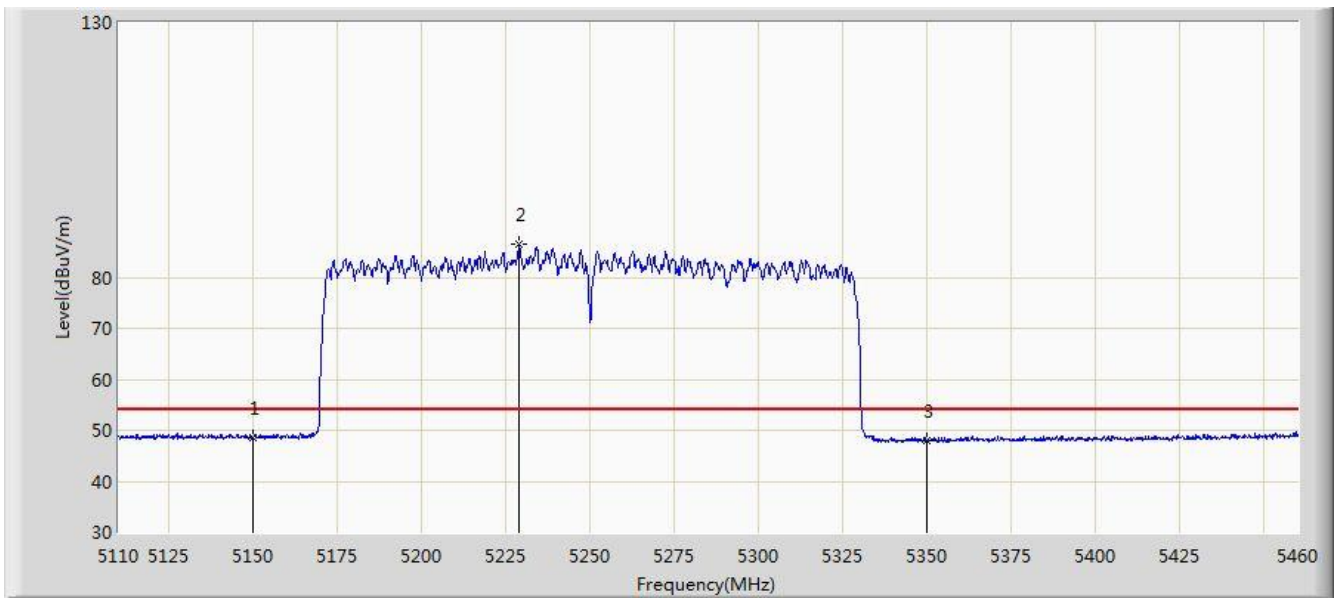


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.523	44.354	-5.477	54.000	4.170	AV
2		*	5228.825	86.500	82.587	N/A	N/A	3.913	AV
3			5350.000	47.914	44.009	-6.086	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

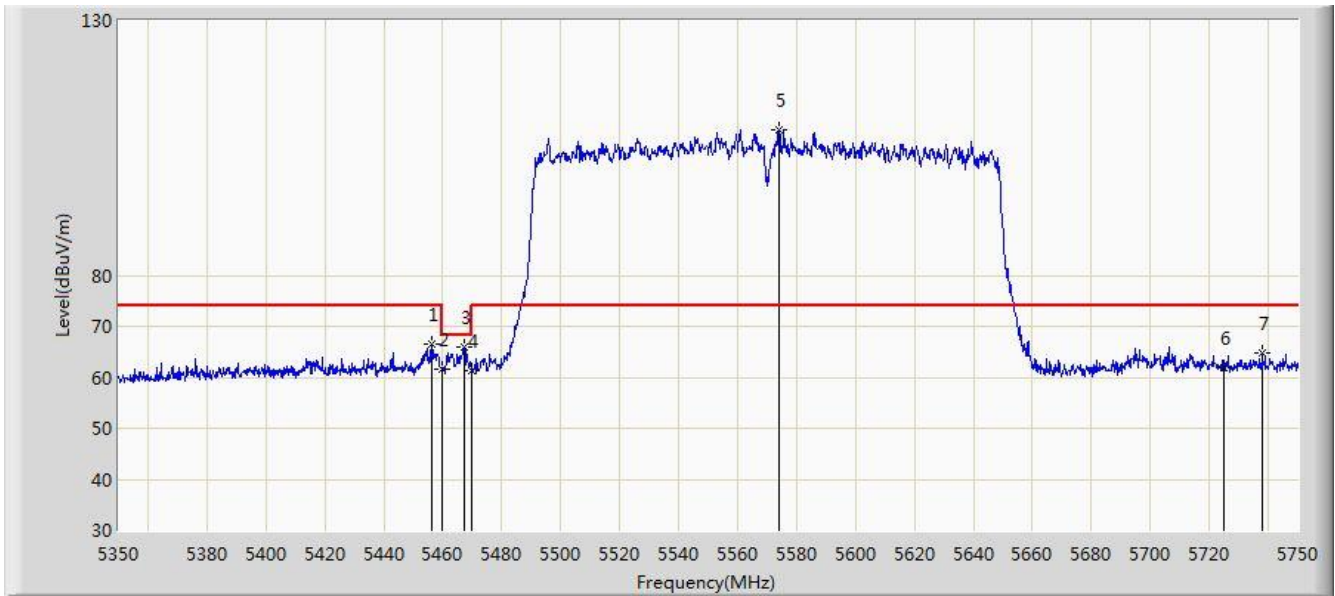


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.400	66.477	62.304	-7.523	74.000	4.172	PK
2			5460.000	61.645	57.465	-12.355	74.000	4.180	PK
3			5467.400	65.968	61.771	-2.232	68.200	4.196	PK
4			5470.000	61.332	57.130	-6.868	68.200	4.202	PK
5		*	5574.000	108.453	103.983	N/A	N/A	4.470	PK
6			5725.000	61.804	56.775	-12.196	74.000	5.029	PK
7			5738.000	64.877	59.765	-9.123	74.000	5.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 21:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

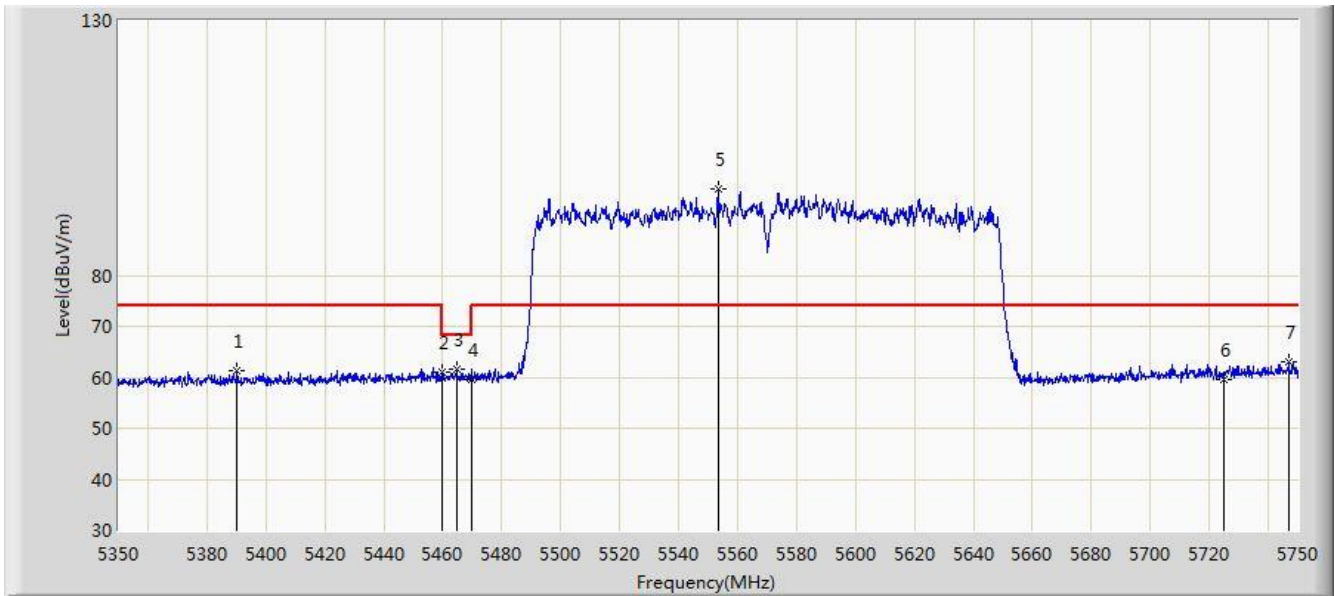


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5390.200	61.329	57.350	-12.671	74.000	3.979	PK
2			5460.000	61.078	56.898	-12.922	74.000	4.180	PK
3			5464.600	61.596	57.406	-6.604	68.200	4.191	PK
4			5470.000	59.668	55.466	-8.532	68.200	4.202	PK
5		*	5553.400	96.950	92.523	N/A	N/A	4.427	PK
6			5725.000	59.582	54.553	-14.418	74.000	5.029	PK
7			5747.000	62.966	57.800	-11.034	74.000	5.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 14:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5180MHz (Beam-Forming Mode)	

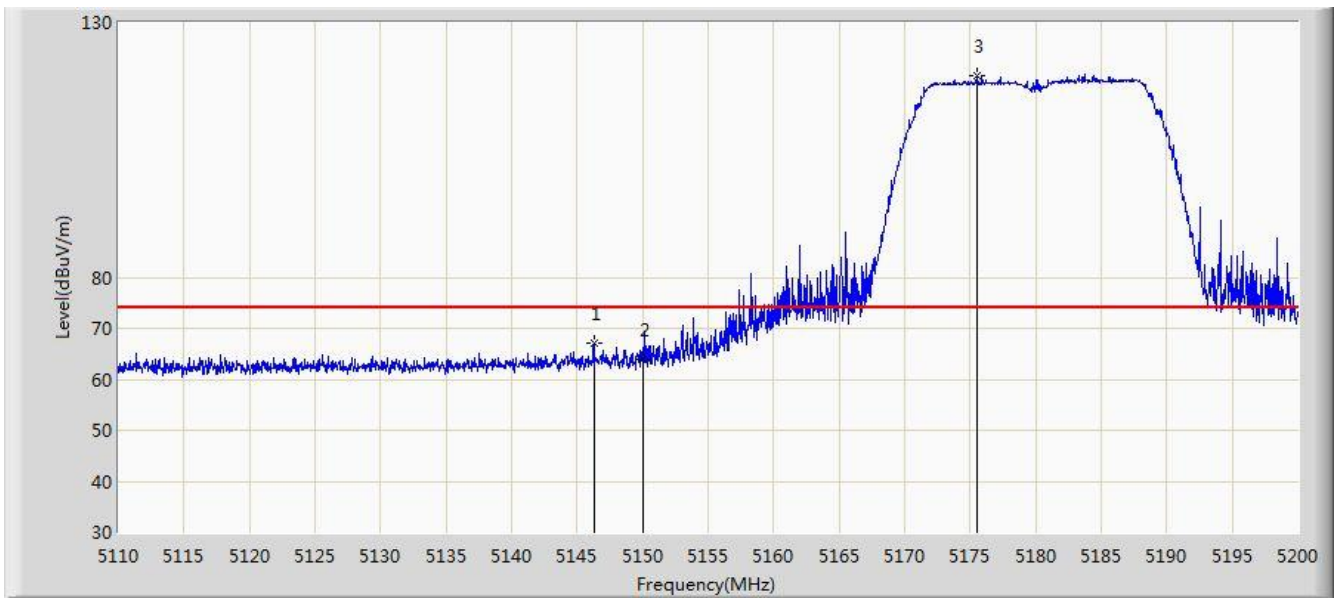


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.270	67.074	62.898	-6.926	74.000	4.176	PK
2			5150.000	64.028	59.859	-9.972	74.000	4.170	PK
3		*	5175.475	119.630	115.545	N/A	N/A	4.084	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5180MHz (Beam-Forming Mode)	

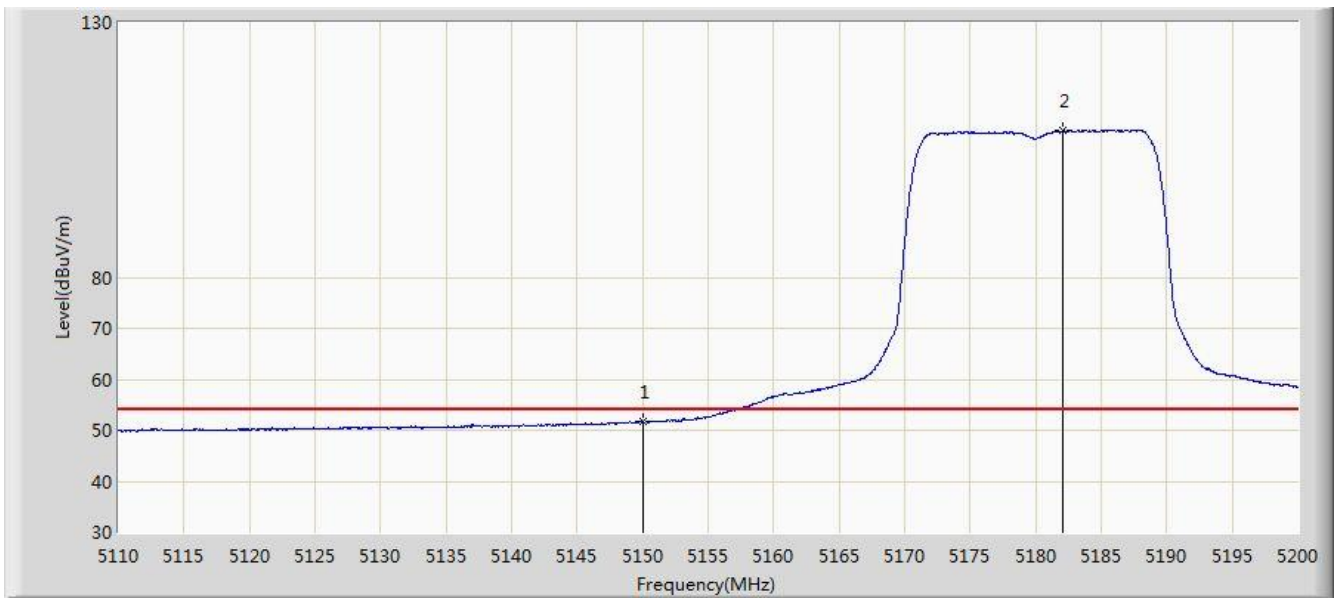


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.606	47.437	-2.394	54.000	4.170	AV
2	X	*	5182.090	108.746	104.685	N/A	N/A	4.061	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5180MHz (Beam-Forming Mode)	

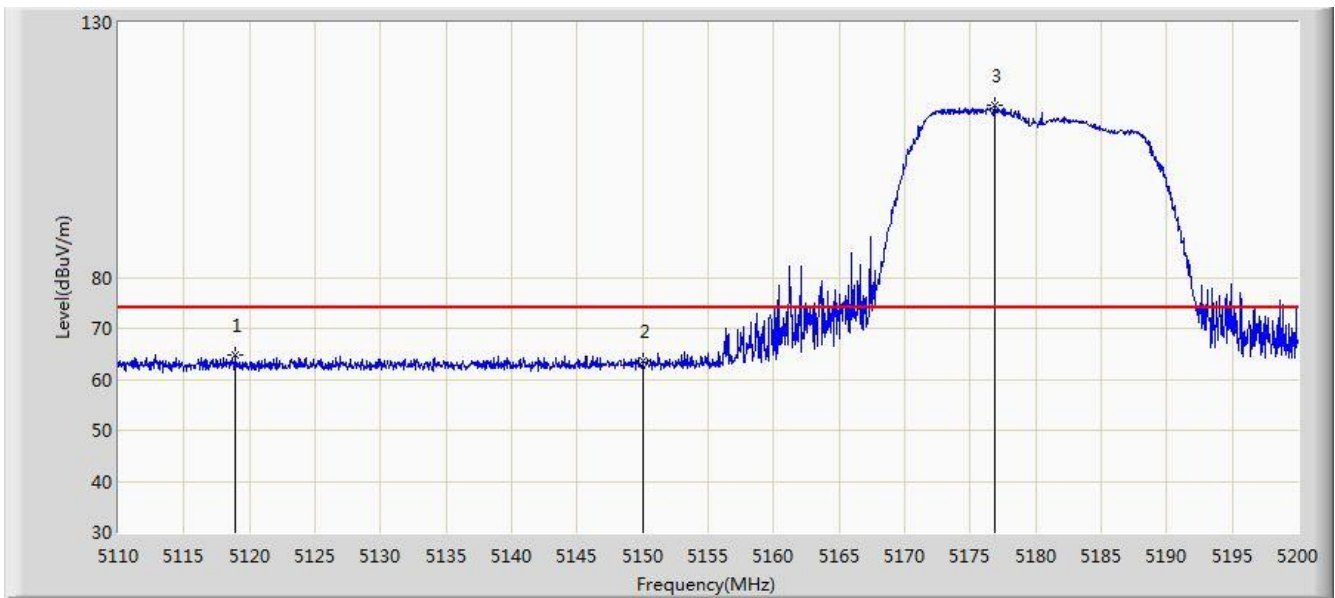


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5118.865	64.767	60.592	-9.233	74.000	4.175	PK
2			5150.000	63.526	59.357	-10.474	74.000	4.170	PK
3		*	5176.915	113.746	109.666	N/A	N/A	4.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5180MHz (Beam-Forming Mode)	

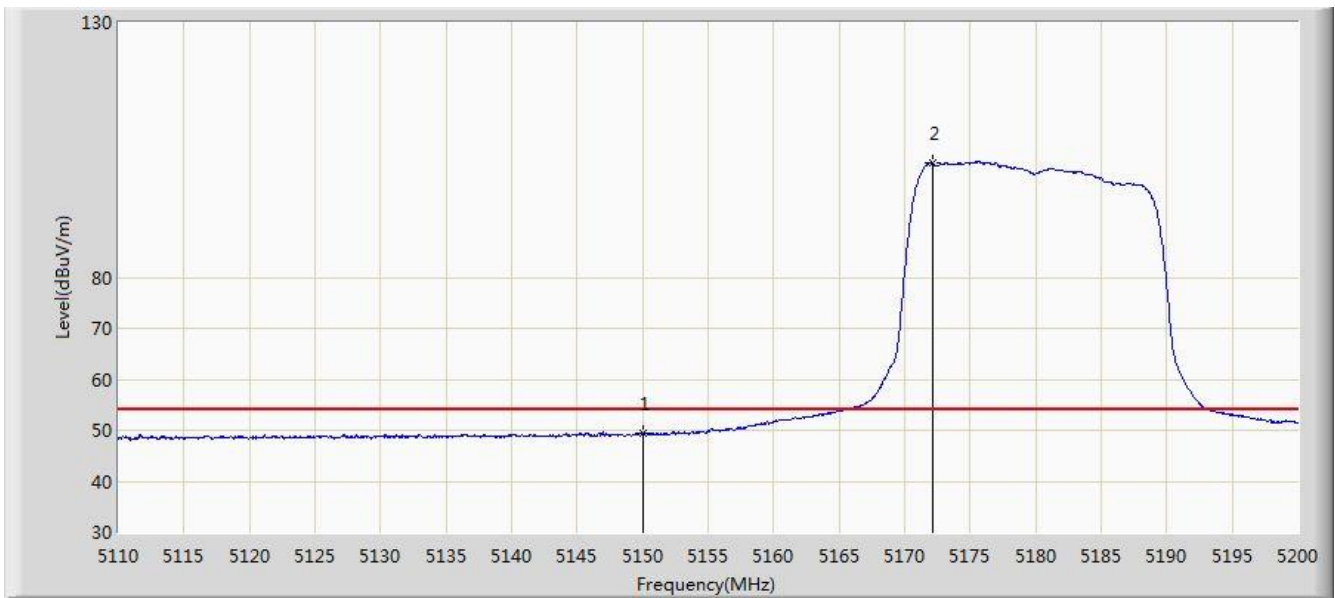


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.304	45.135	-4.696	54.000	4.170	AV
2		*	5172.100	102.538	98.441	N/A	N/A	4.097	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5320MHz (Beam-Forming Mode)	

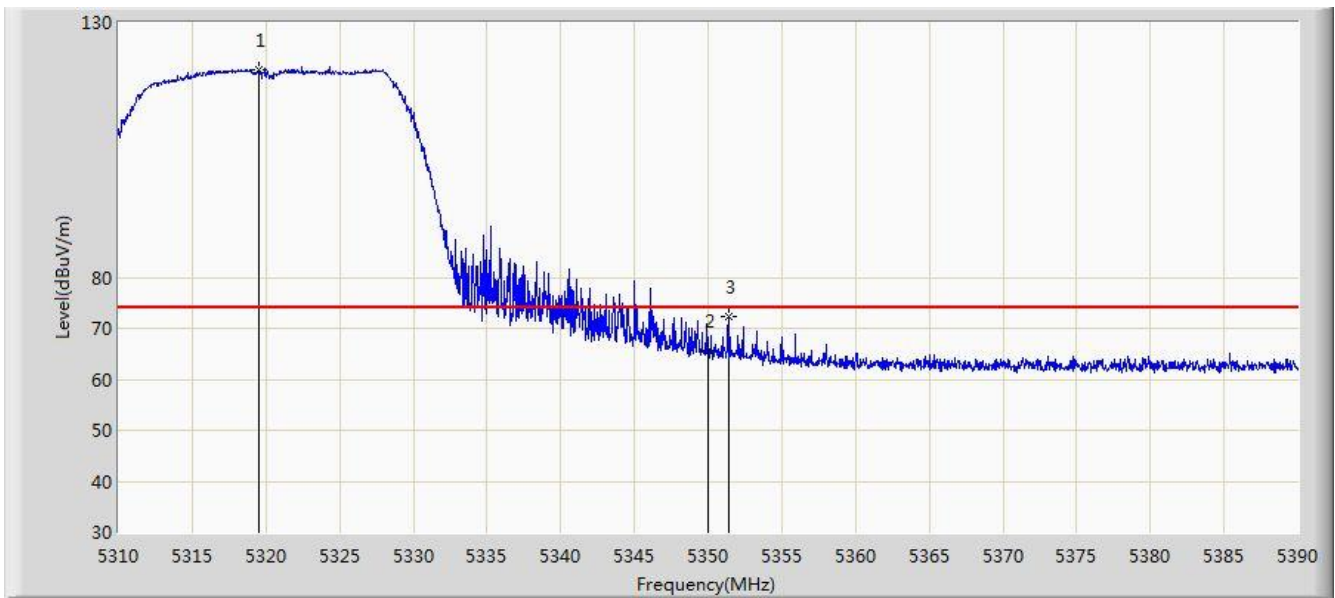


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.520	120.839	116.991	N/A	N/A	3.847	PK
2			5350.000	65.575	61.670	-8.425	74.000	3.904	PK
3			5351.440	72.174	68.267	-1.826	74.000	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5320MHz (Beam-Forming Mode)	

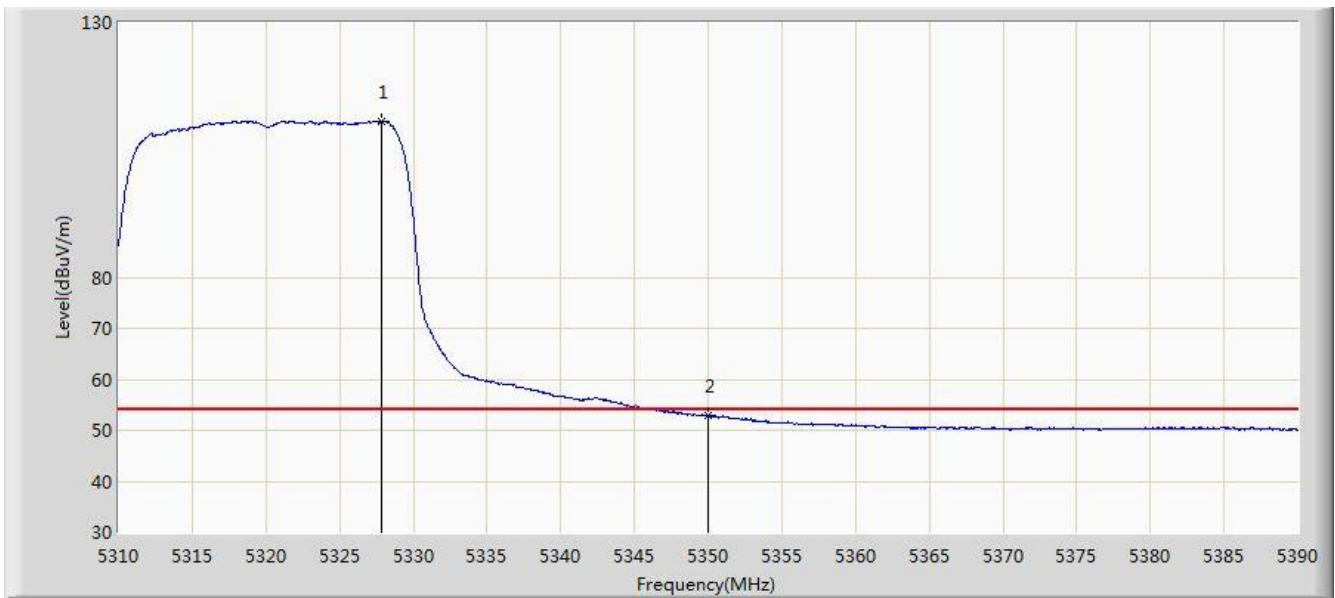


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5327.880	110.654	106.790	N/A	N/A	3.864	AV
2			5350.000	52.768	48.863	-1.232	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5320MHz (Beam-Forming Mode)	

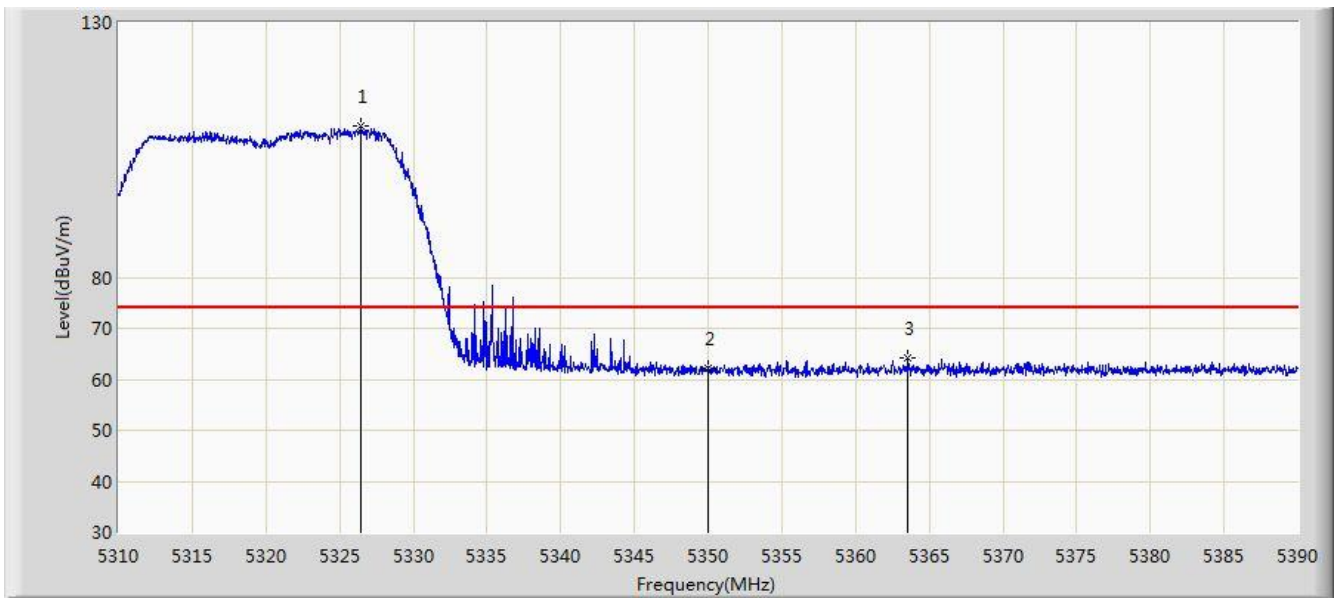


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.480	109.666	105.805	N/A	N/A	3.861	PK
2			5350.000	62.073	58.168	-11.927	74.000	3.904	PK
3			5363.560	64.336	60.407	-9.664	74.000	3.929	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5320MHz (Beam-Forming Mode)	

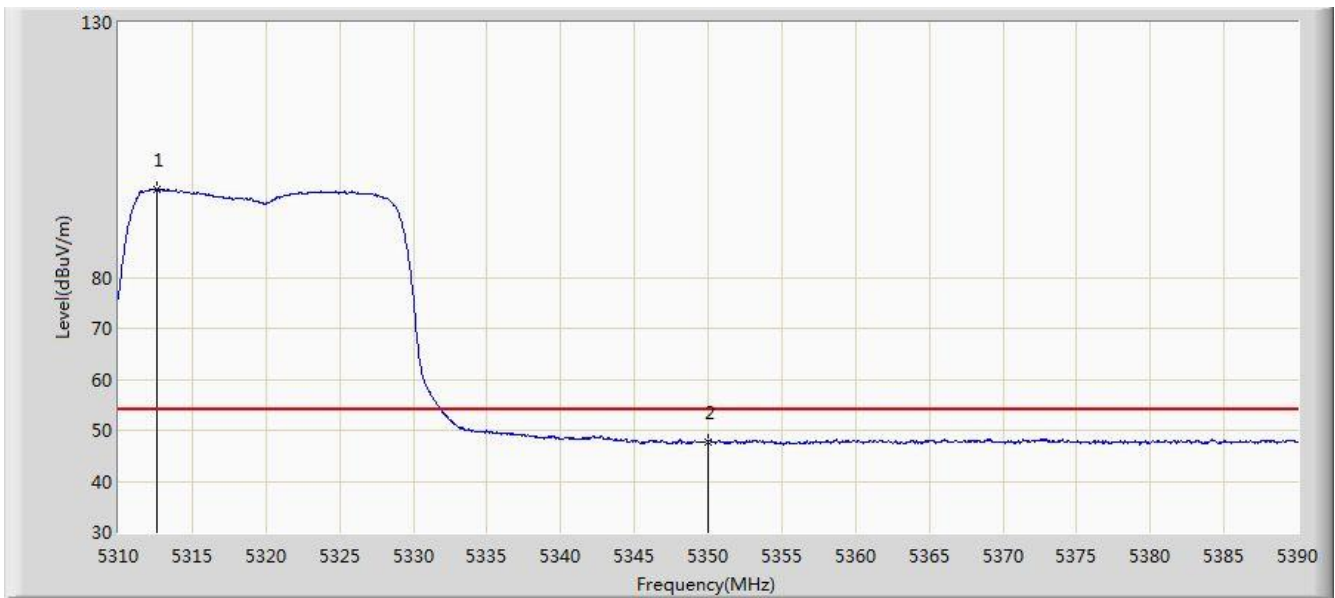


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.560	97.388	93.553	N/A	N/A	3.834	AV
2			5350.000	47.705	43.800	-6.295	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5500MHz (Beam-Forming Mode)	

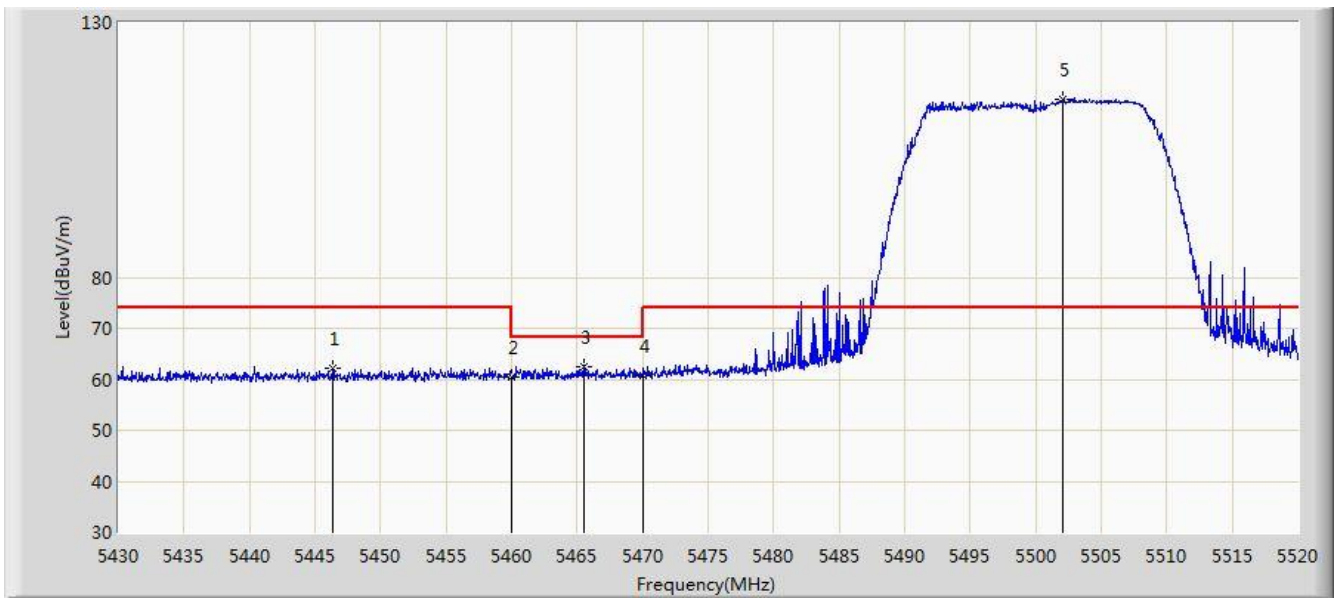


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.380	62.152	58.009	-11.848	74.000	4.143	PK
2			5460.000	60.492	56.312	-13.508	74.000	4.180	PK
3			5465.550	62.605	58.413	-5.595	68.200	4.193	PK
4			5470.000	60.719	56.517	-7.481	68.200	4.202	PK
5		*	5502.090	114.939	110.661	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5500MHz (Beam-Forming Mode)	

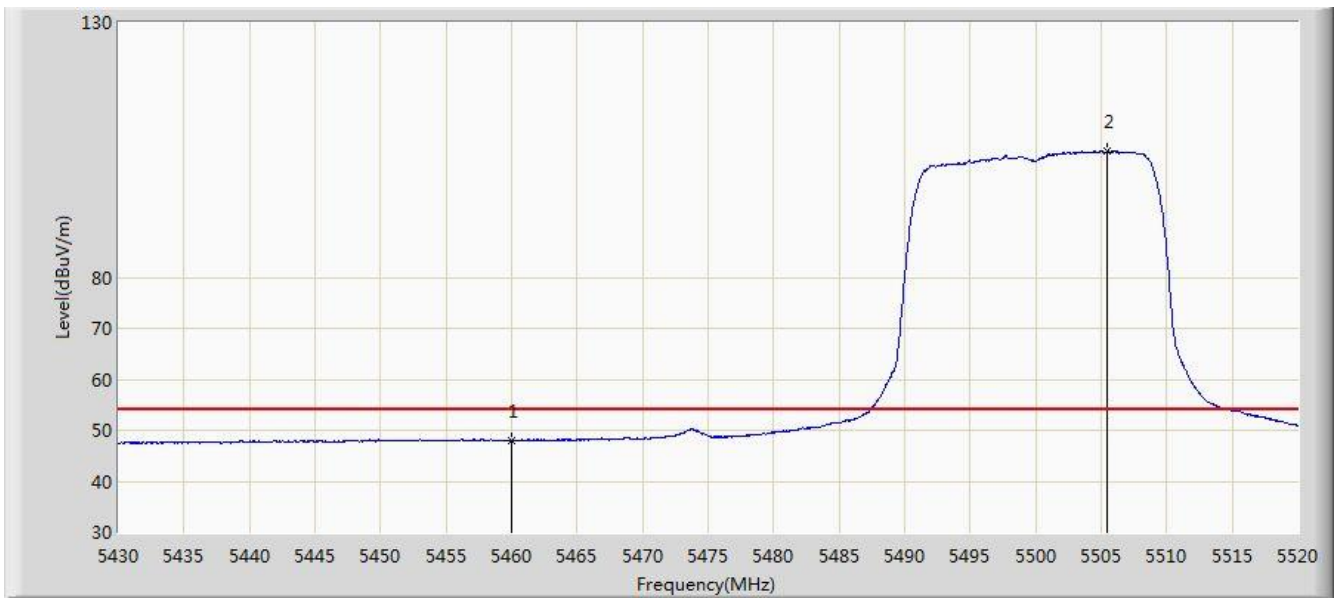


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.072	43.892	-5.928	54.000	4.180	AV
2		*	5505.420	104.694	100.406	N/A	N/A	4.288	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5500MHz (Beam-Forming Mode)	

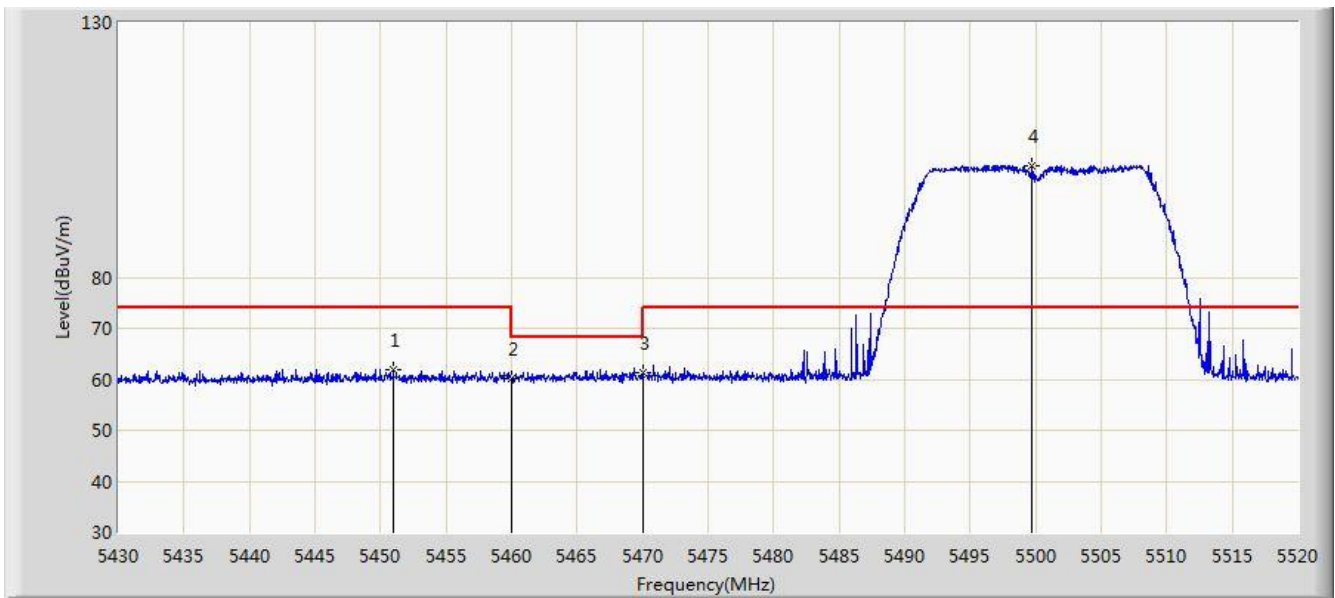


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.970	62.010	57.852	-11.990	74.000	4.158	PK
2			5460.000	60.072	55.892	-13.928	74.000	4.180	PK
3			5470.000	61.333	57.131	-6.867	68.200	4.202	PK
4		*	5499.705	102.020	97.749	N/A	N/A	4.271	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5500MHz (Beam-Forming Mode)	

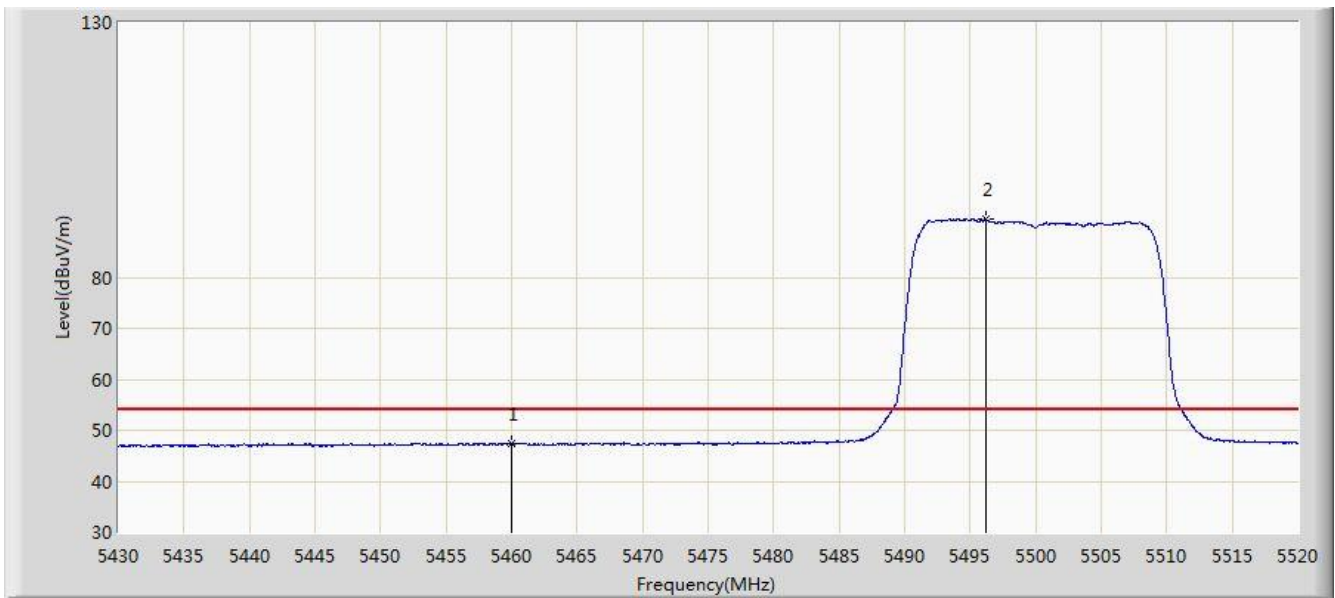


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.370	43.190	-6.630	54.000	4.180	AV
2		*	5496.150	91.436	87.174	N/A	N/A	4.261	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5700MHz (Beam-Forming Mode)	

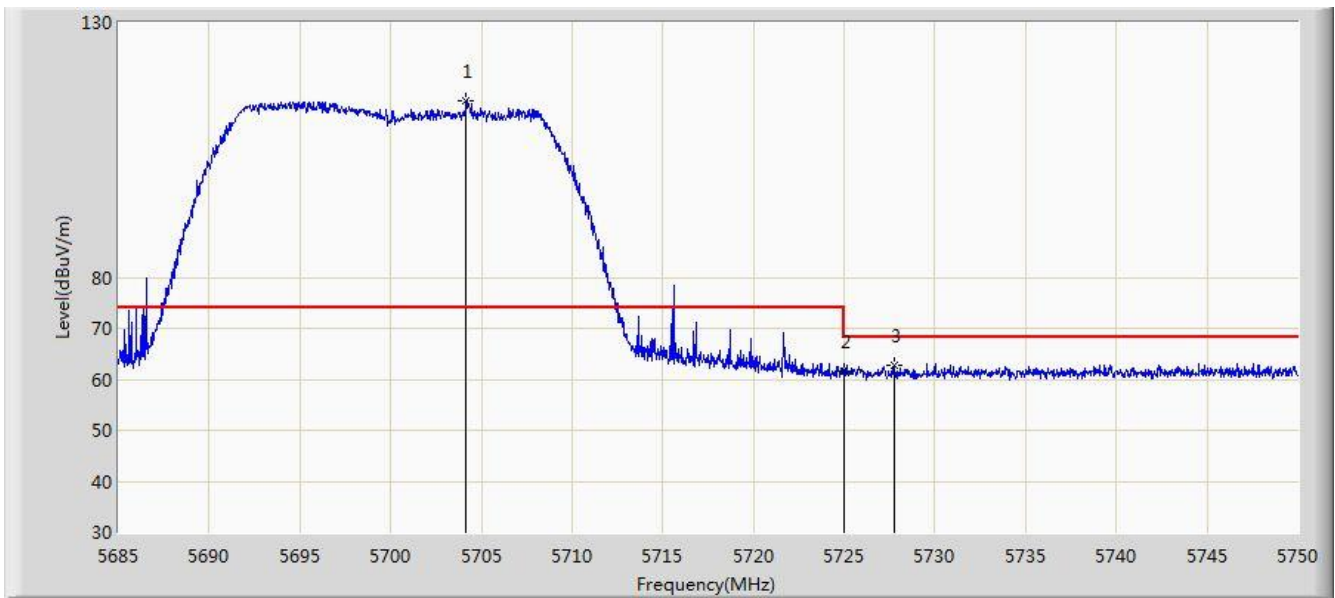


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.143	114.498	97.448	N/A	N/A	17.049	PK
2			5725.000	61.475	44.371	-6.725	68.200	17.104	PK
3			5727.770	62.803	45.692	-5.397	68.200	17.111	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5700MHz (Beam-Forming Mode)	

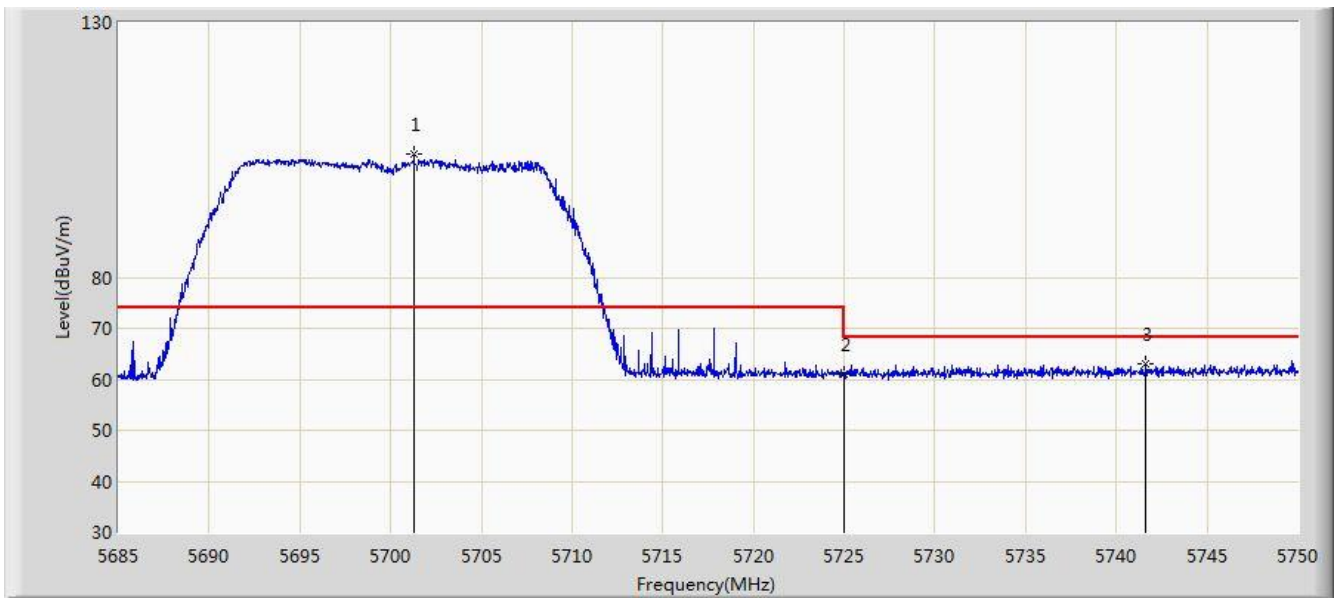


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.283	104.106	99.221	N/A	N/A	4.885	PK
2			5725.000	61.143	56.114	-7.057	68.200	5.029	PK
3			5741.647	63.048	57.913	-5.152	68.200	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5745MHz (Beam-Forming Mode)	

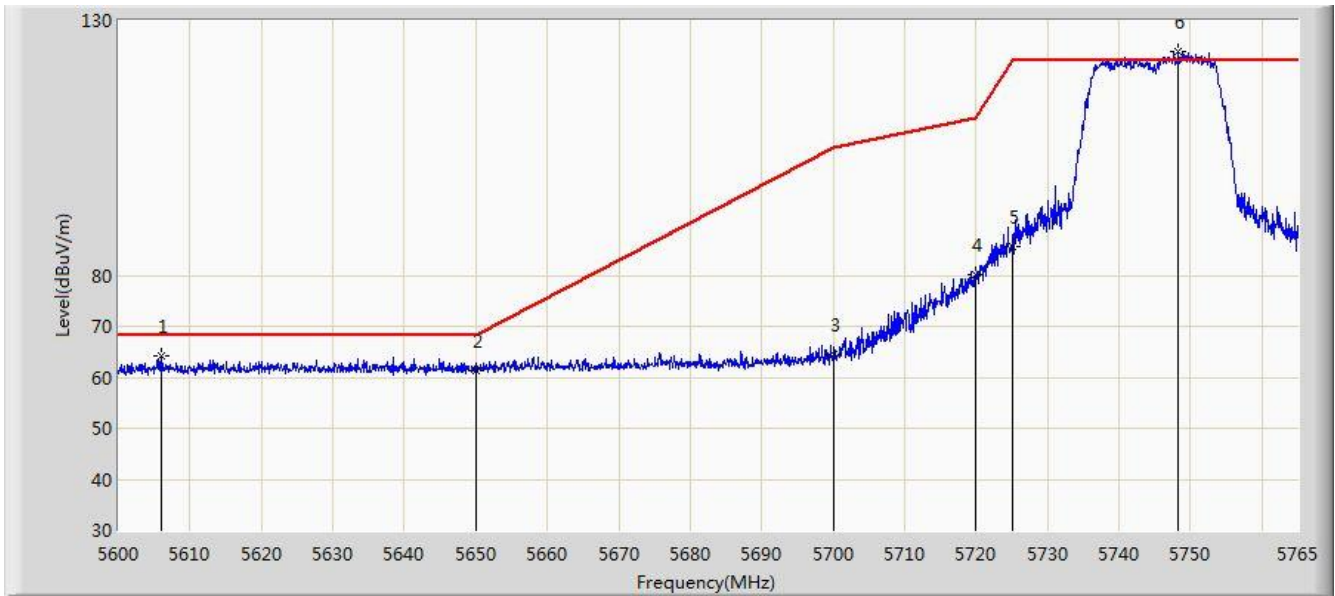


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5606.022	64.225	59.684	-3.975	68.200	4.542	PK
2			5650.000	61.346	56.675	-6.854	68.200	4.671	PK
3			5700.000	64.380	59.502	-40.820	105.200	4.878	PK
4			5720.000	80.090	75.093	-30.710	110.800	4.997	PK
5			5725.000	85.526	80.497	-36.674	122.200	5.029	PK
6		*	5748.252	123.988	118.815	N/A	N/A	5.173	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5745MHz (Beam-Forming Mode)	

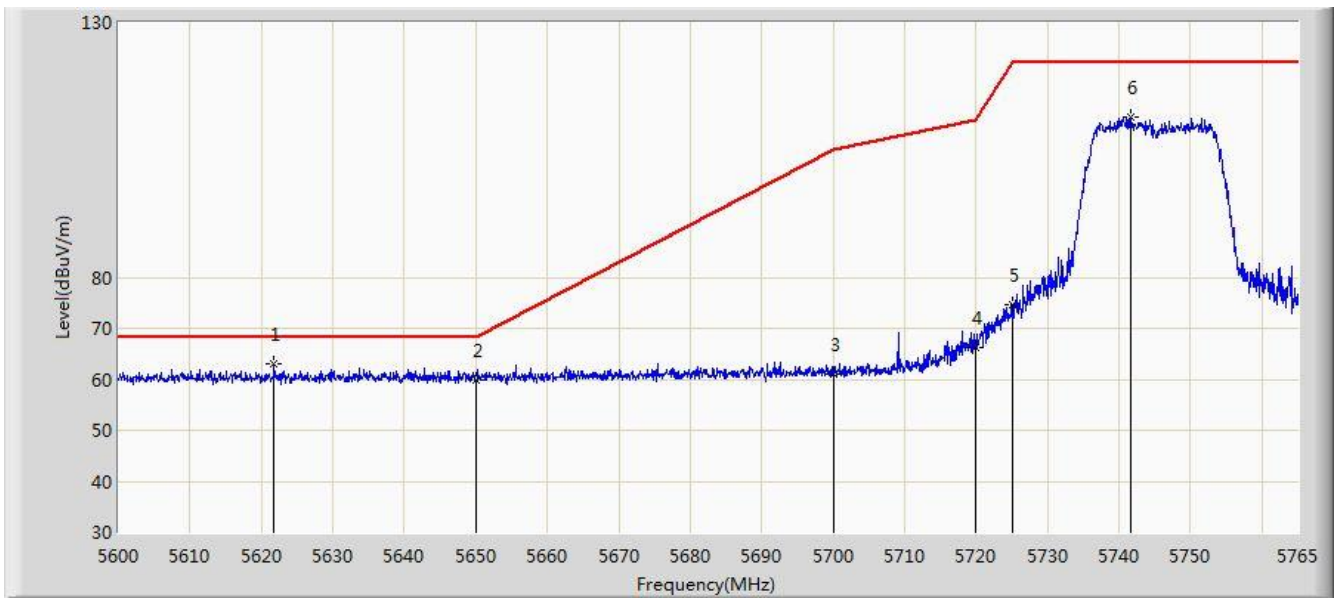


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5621.780	63.118	58.532	-5.082	68.200	4.586	PK
2			5650.000	59.785	55.114	-8.415	68.200	4.671	PK
3			5700.000	60.906	56.028	-44.294	105.200	4.878	PK
4			5720.000	66.329	61.332	-44.471	110.800	4.997	PK
5			5725.000	74.658	69.629	-47.542	122.200	5.029	PK
6			5741.570	111.488	106.353	N/A	N/A	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 15:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5825MHz (Beam-Forming Mode)	

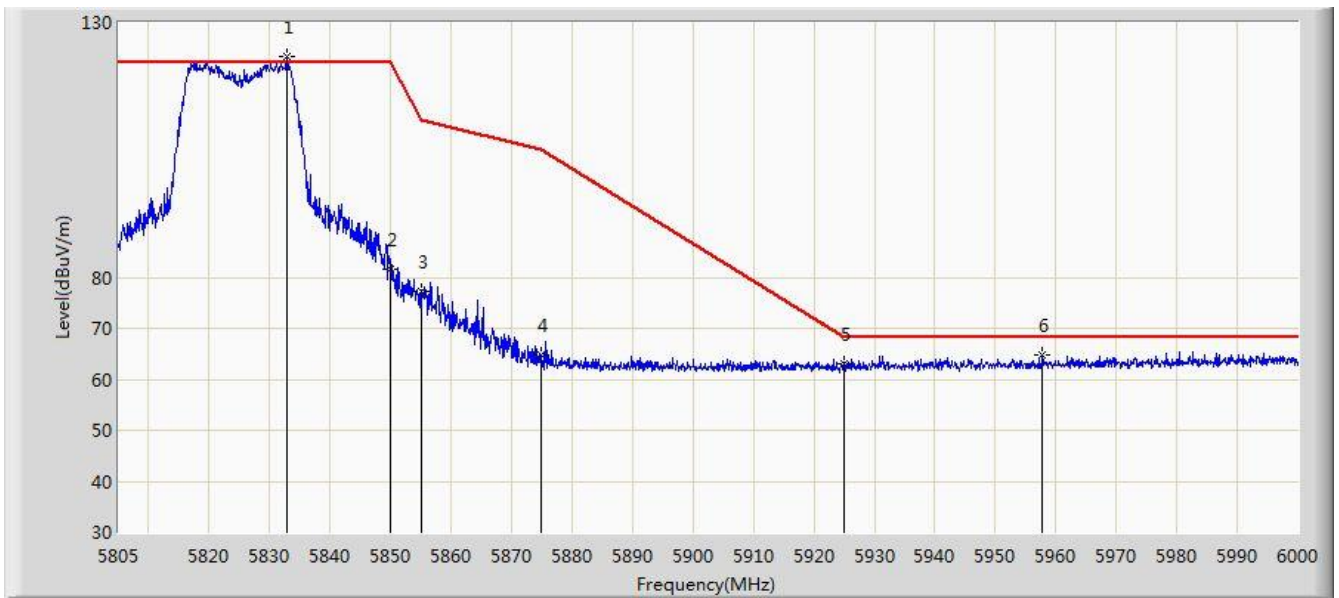


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5832.885	123.198	117.564	N/A	N/A	5.635	PK
2			5850.000	81.712	75.986	-40.488	122.200	5.726	PK
3			5855.000	77.209	71.463	-33.591	110.800	5.746	PK
4			5875.000	64.666	58.846	-40.534	105.200	5.820	PK
5			5925.000	63.017	57.051	-5.183	68.200	5.967	PK
6			5957.783	64.809	58.769	-3.391	68.200	6.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT20 at channel 5825MHz (Beam-Forming Mode)	

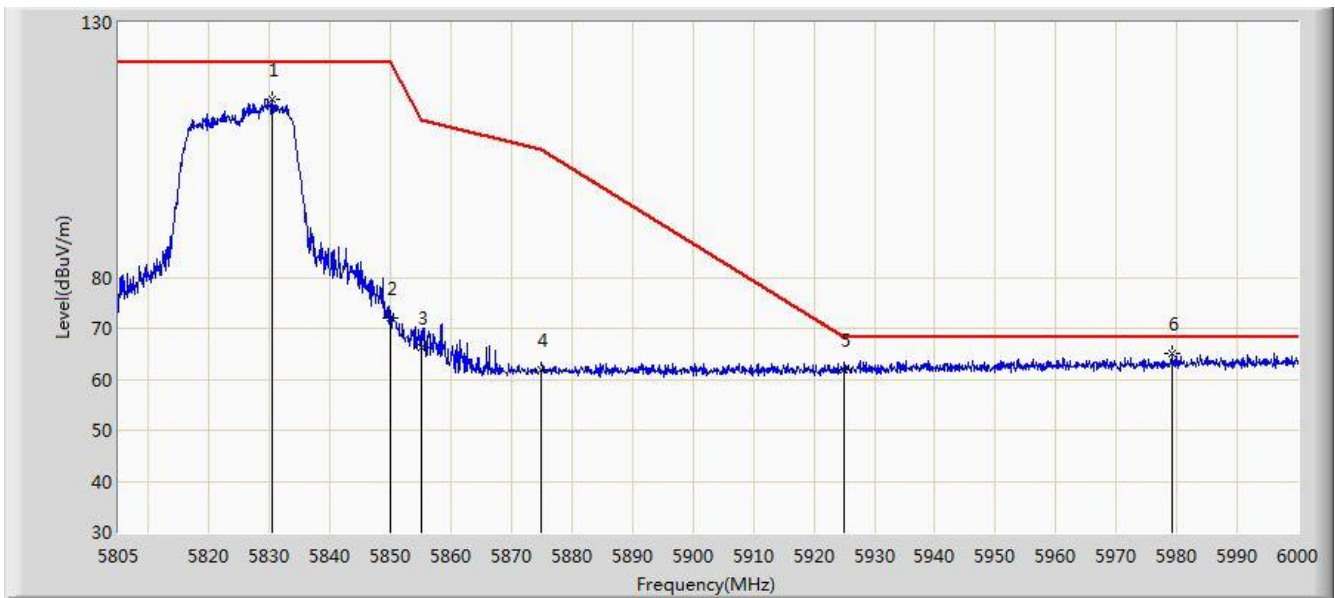


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5830.447	114.968	109.348	N/A	N/A	5.620	PK
2			5850.000	72.143	66.417	-50.057	122.200	5.726	PK
3			5855.000	66.104	60.358	-44.696	110.800	5.746	PK
4			5875.000	61.865	56.045	-43.335	105.200	5.820	PK
5			5925.000	61.772	55.806	-6.428	68.200	5.967	PK
6		*	5979.135	65.133	59.057	-3.067	68.200	6.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5190MHz (Beam-Forming Mode)	

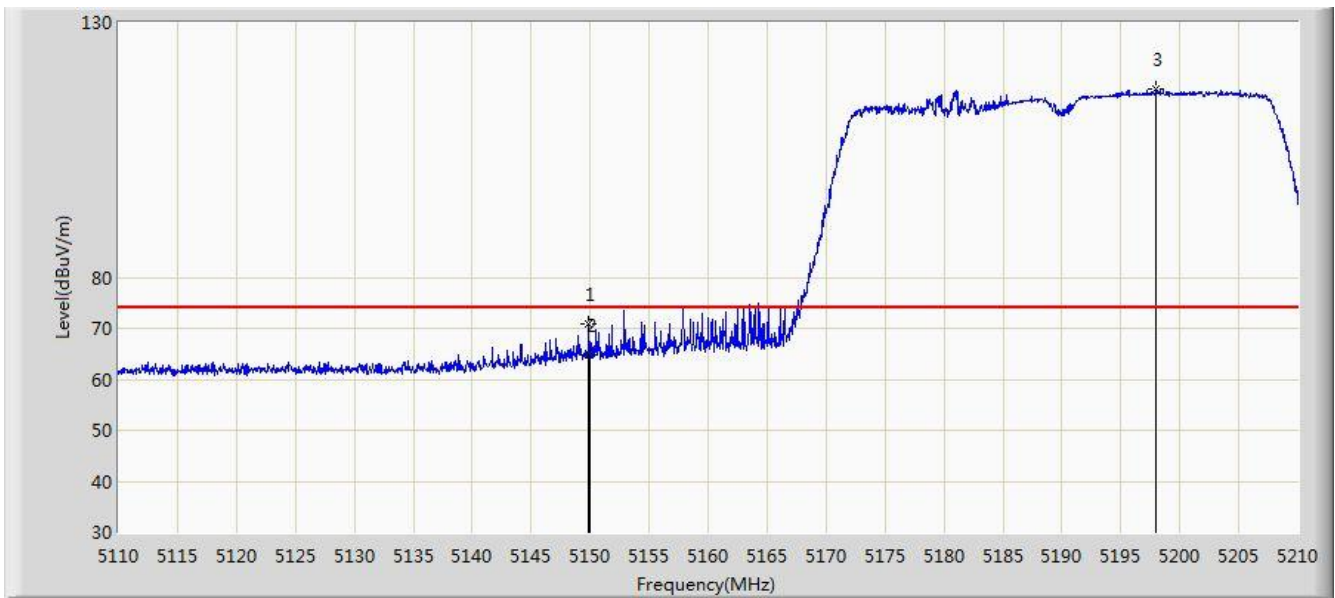


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.900	70.968	66.798	-3.032	74.000	4.170	PK
2			5150.000	64.674	60.505	-9.326	74.000	4.170	PK
3		*	5198.000	117.069	113.064	N/A	N/A	4.005	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5190MHz (Beam-Forming Mode)	

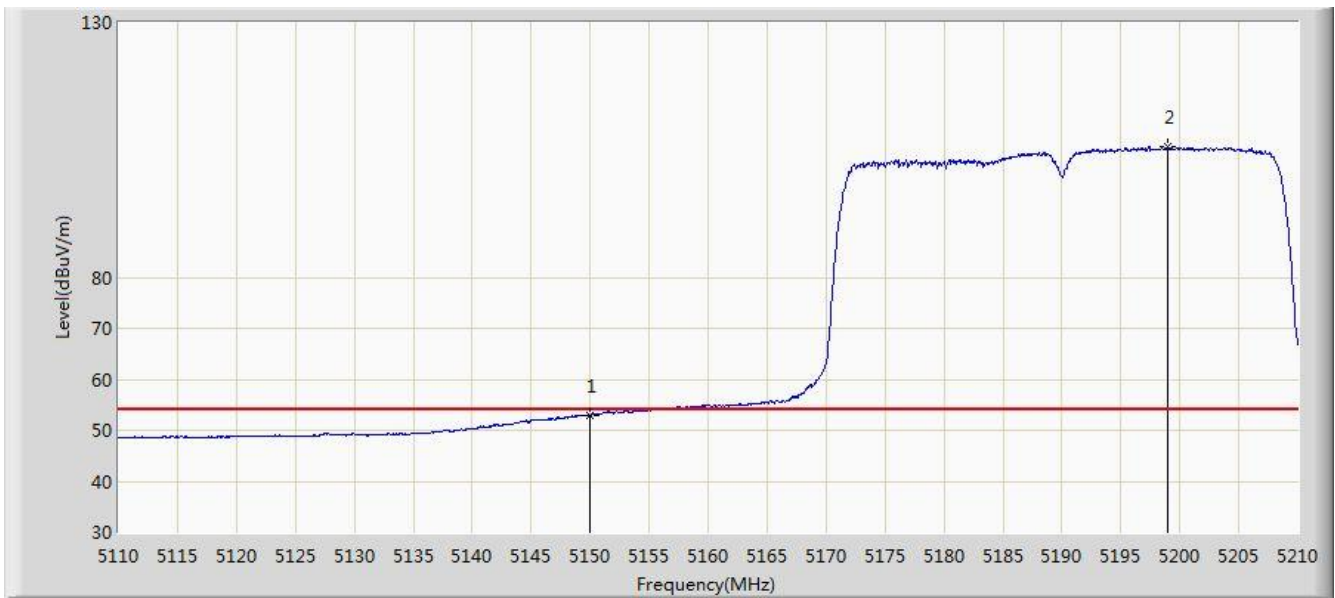


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.885	48.716	-1.115	54.000	4.170	AV
2		*	5199.000	105.627	101.626	N/A	N/A	4.001	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5190MHz (Beam-Forming Mode)	

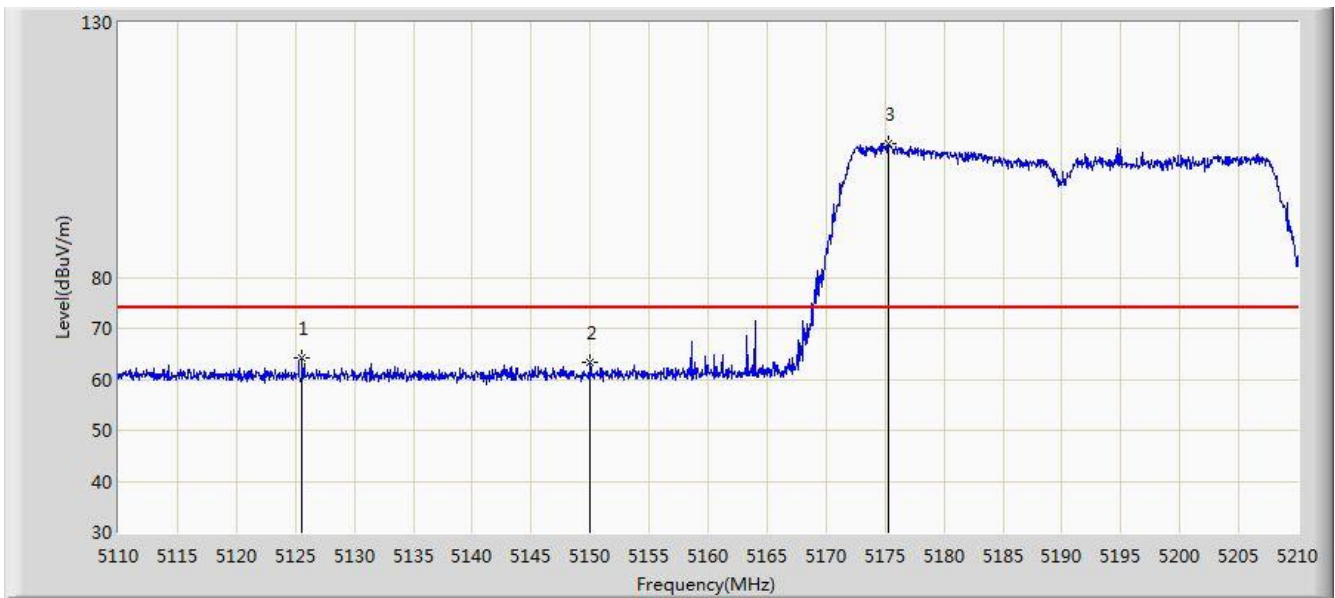


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.600	64.116	59.941	-9.884	74.000	4.174	PK
2			5150.000	63.288	59.119	-10.712	74.000	4.170	PK
3		*	5175.250	106.251	102.165	N/A	N/A	4.085	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5190MHz (Beam-Forming Mode)	

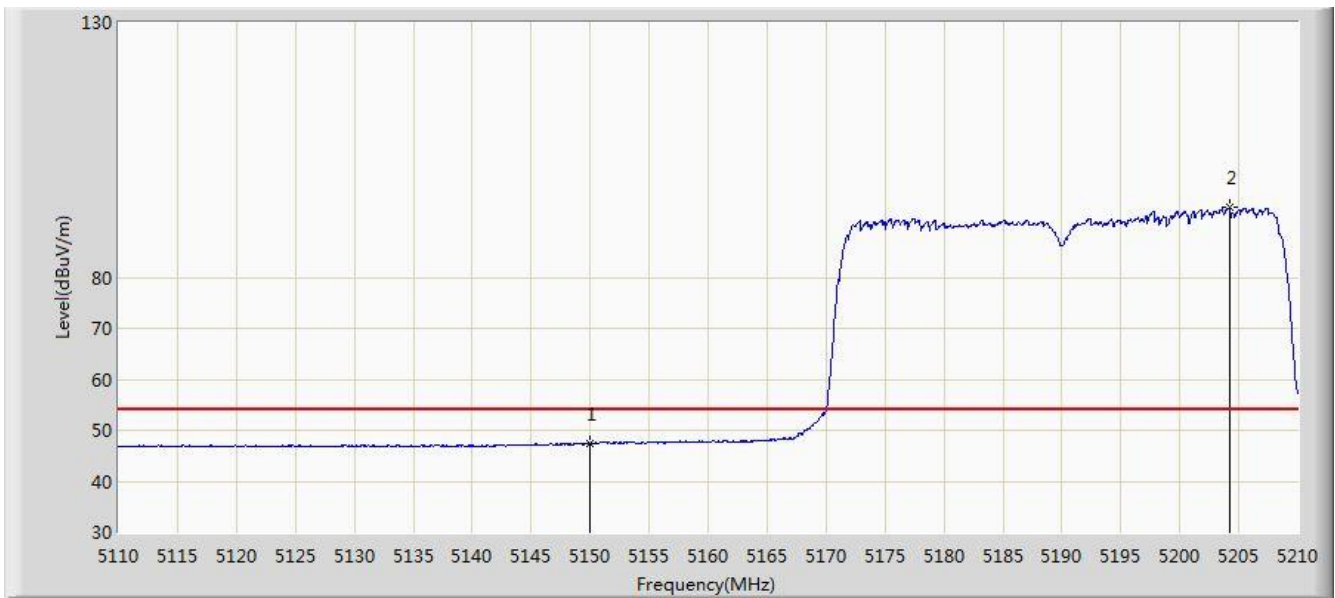


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.333	43.164	-6.667	54.000	4.170	AV
2		*	5204.200	93.626	89.640	N/A	N/A	3.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5310MHz (Beam-Forming Mode)	

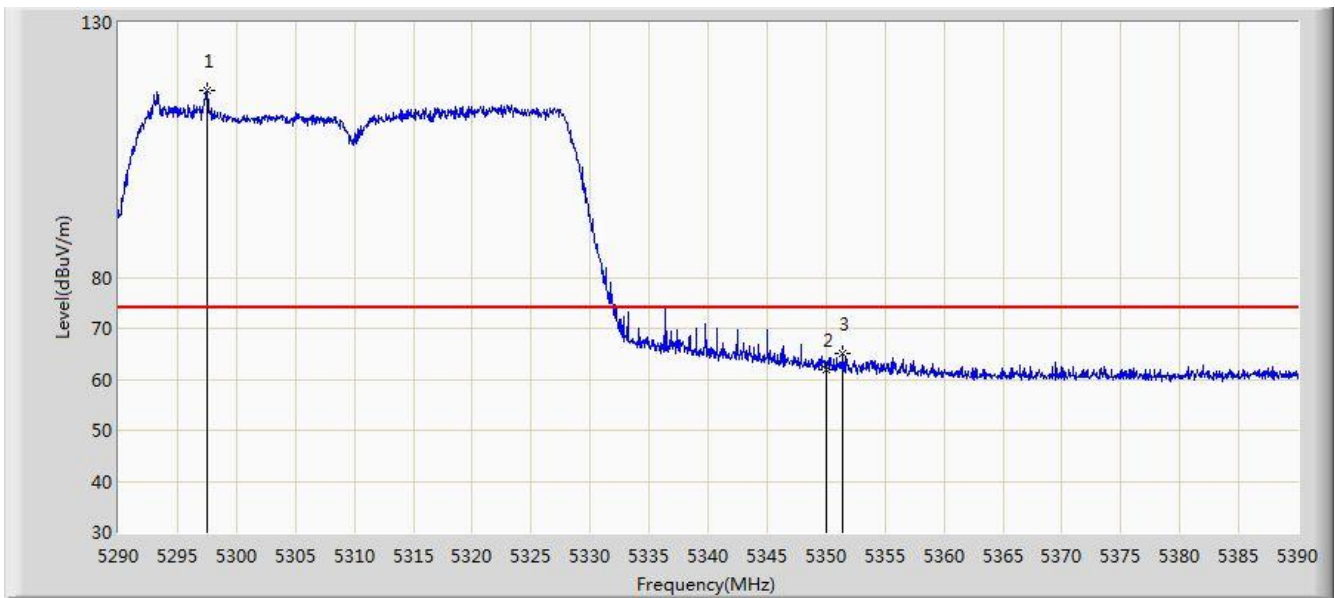


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.500	116.774	112.959	N/A	N/A	3.815	PK
2			5350.000	61.976	58.071	-12.024	74.000	3.904	PK
3			5351.400	65.044	61.137	-8.956	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5310MHz (Beam-Forming Mode)	

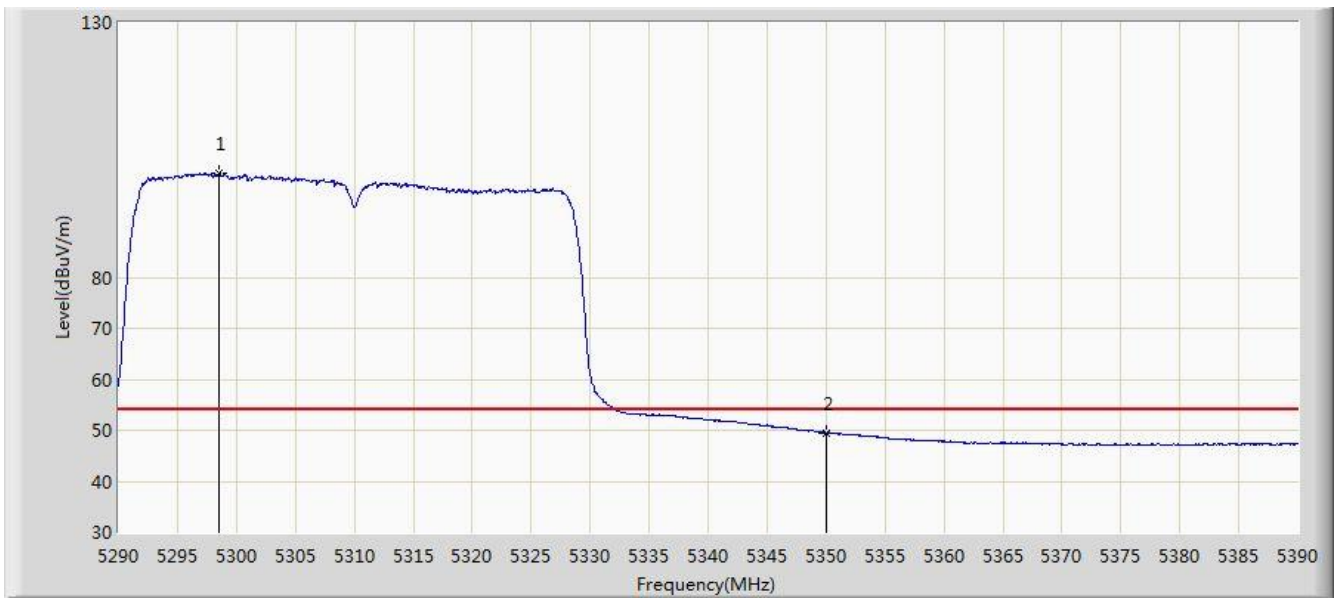


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.500	100.303	96.489	N/A	N/A	3.814	AV
2			5350.000	49.491	45.586	-4.509	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5310MHz (Beam-Forming Mode)	

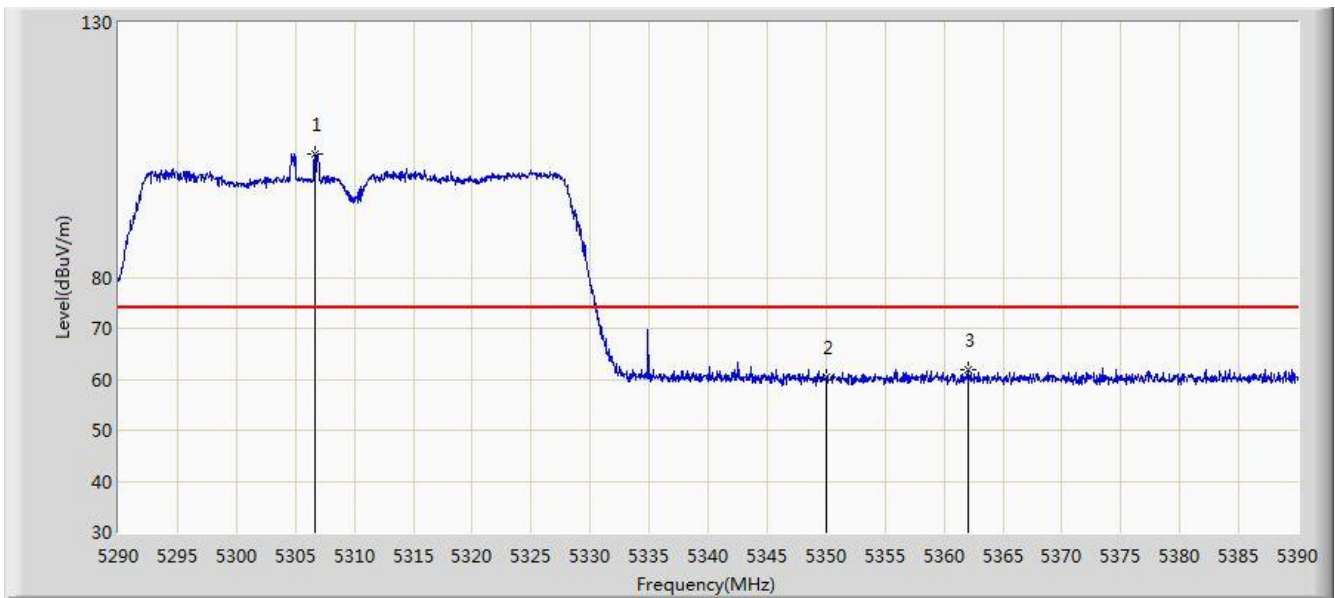


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.650	104.095	100.271	N/A	N/A	3.824	PK
2			5350.000	60.350	56.445	-13.650	74.000	3.904	PK
3			5362.000	61.962	58.036	-12.038	74.000	3.926	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5310MHz (Beam-Forming Mode)	

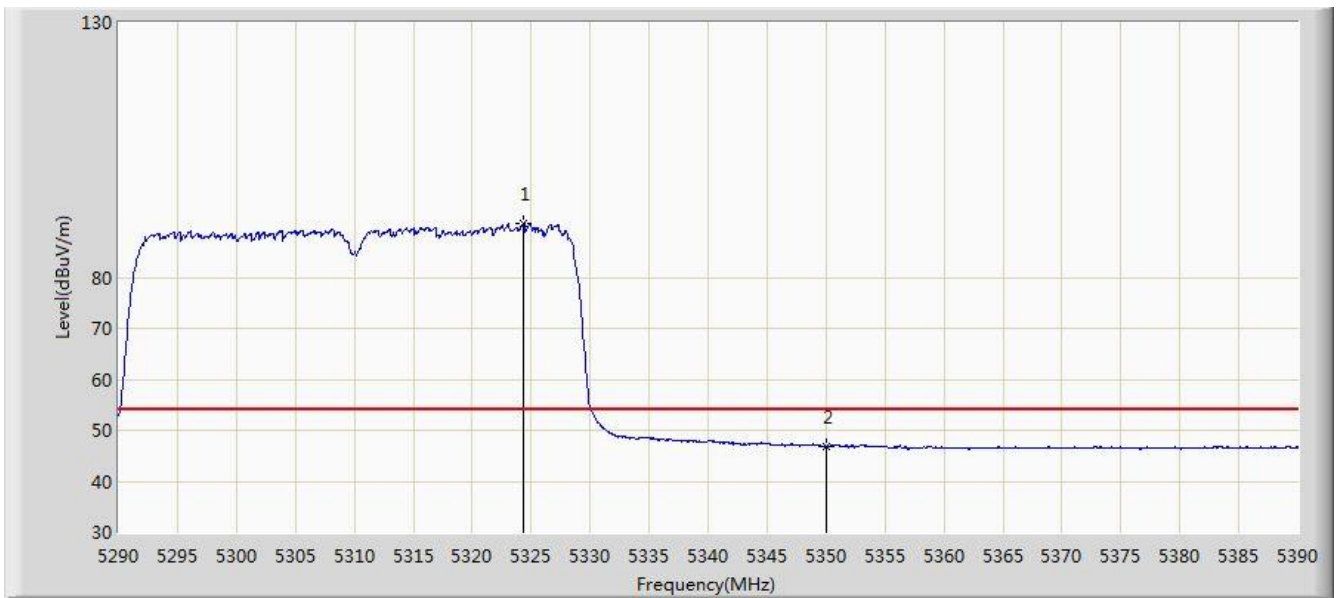


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.350	90.457	86.600	N/A	N/A	3.858	AV
2			5350.000	46.919	43.014	-7.081	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5510MHz (Beam-Forming Mode)	

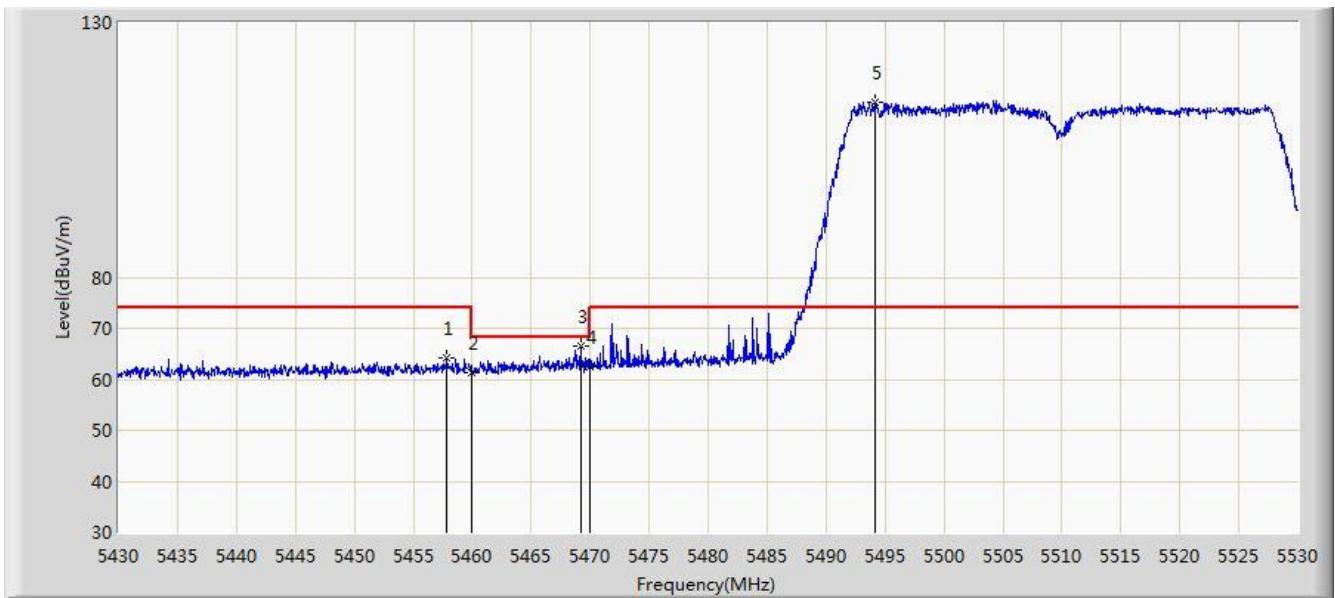


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.850	64.284	60.108	-9.716	74.000	4.176	PK
2			5460.000	61.403	57.223	-12.597	74.000	4.180	PK
3			5469.200	66.614	62.413	-1.586	68.200	4.201	PK
4			5470.000	62.607	58.405	-5.593	68.200	4.202	PK
5		*	5494.200	114.393	110.136	N/A	N/A	4.257	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5510MHz (Beam-Forming Mode)	

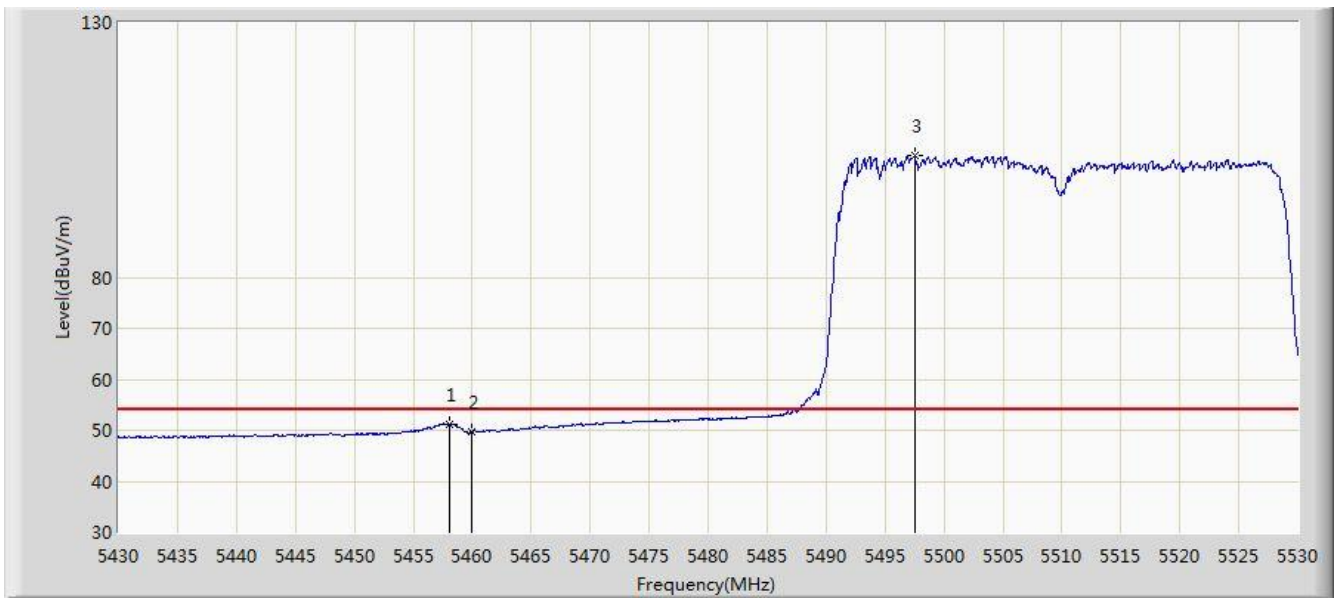


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	51.292	47.116	-2.708	54.000	4.176	AV
2			5460.000	49.750	45.570	-4.250	54.000	4.180	AV
3		*	5497.500	103.832	99.567	N/A	N/A	4.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5510MHz (Beam-Forming Mode)	

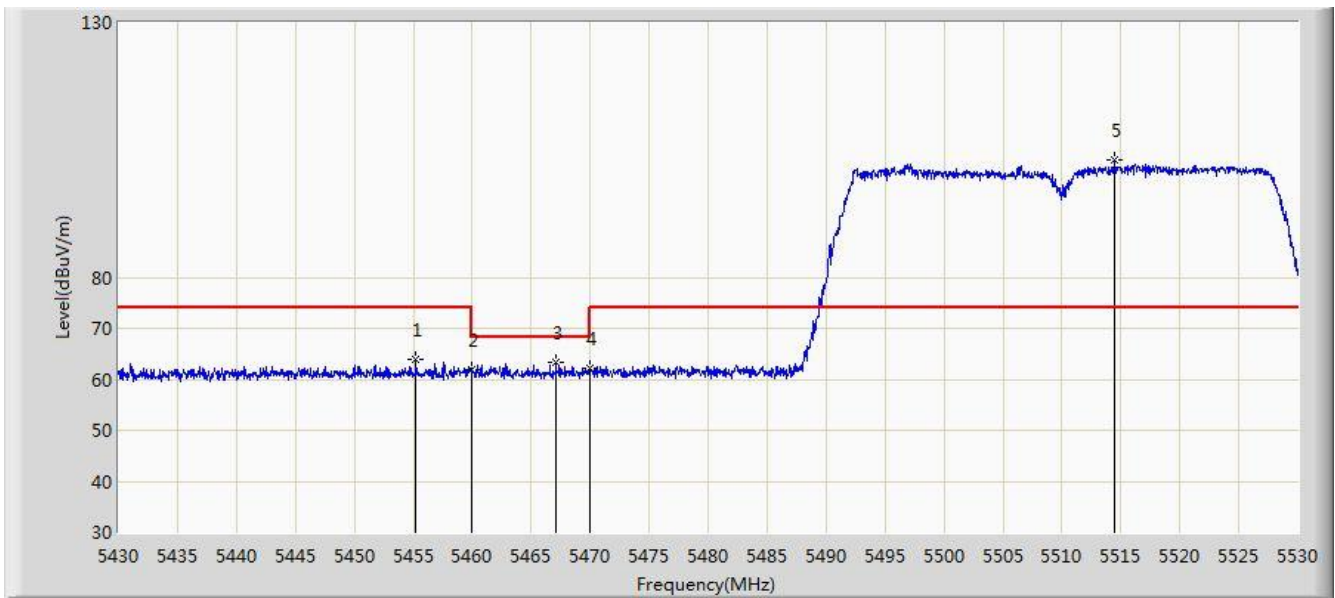


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.250	63.944	59.774	-10.056	74.000	4.170	PK
2			5460.000	61.865	57.685	-12.135	74.000	4.180	PK
3			5467.100	63.251	59.055	-4.949	68.200	4.196	PK
4			5470.000	62.142	57.940	-6.058	68.200	4.202	PK
5		*	5514.500	103.047	98.733	N/A	N/A	4.313	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/01 - 16:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5510MHz (Beam-Forming Mode)	

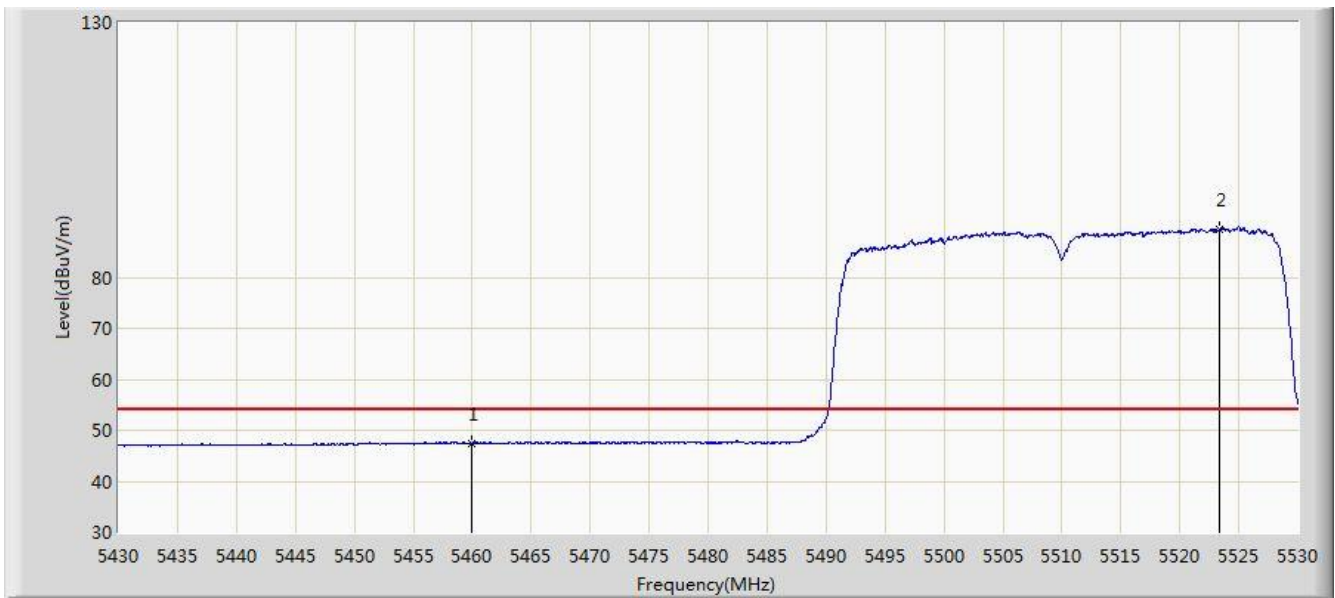


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.481	43.301	-6.519	54.000	4.180	AV
2		*	5523.400	89.507	85.166	N/A	N/A	4.341	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 15:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5670MHz (Beam-Forming Mode)	

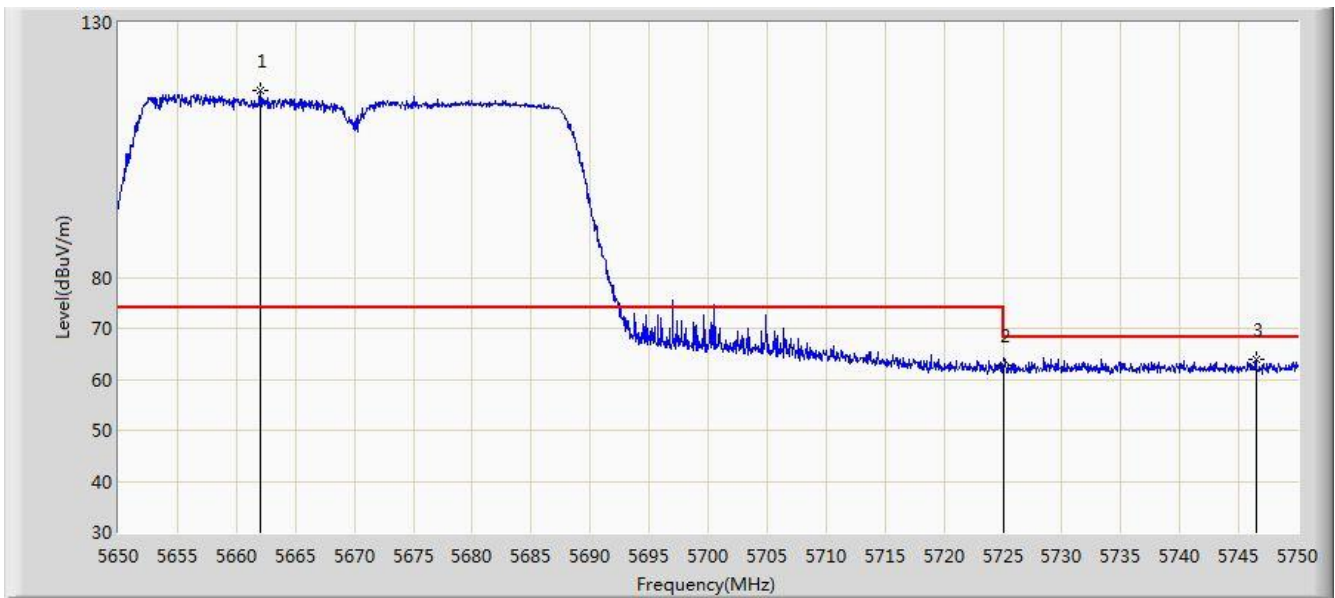


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.000	116.767	112.052	N/A	N/A	4.714	PK
2			5725.000	62.753	57.724	-5.447	68.200	5.029	PK
3			5746.450	64.046	58.883	-4.154	68.200	5.163	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 15:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5670MHz (Beam-Forming Mode)	

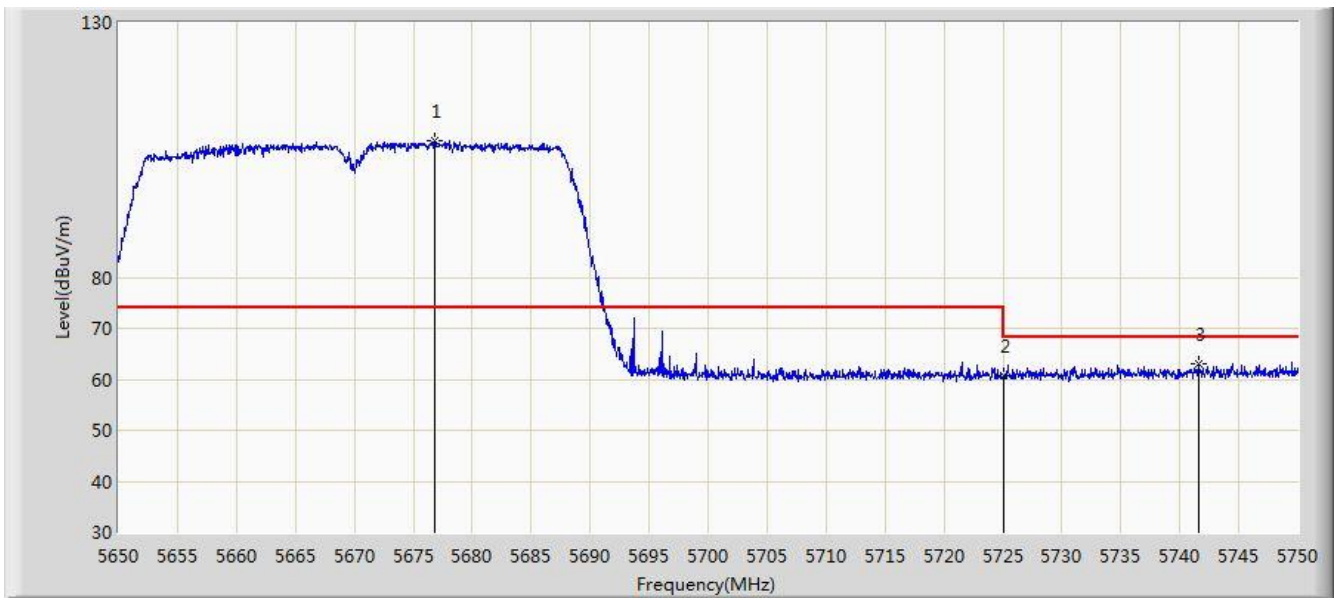


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.850	106.951	102.176	N/A	N/A	4.775	PK
2			5725.000	60.603	55.574	-7.597	68.200	5.029	PK
3			5741.550	63.140	58.006	-5.060	68.200	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 15:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5755MHz (Beam-Forming Mode)	

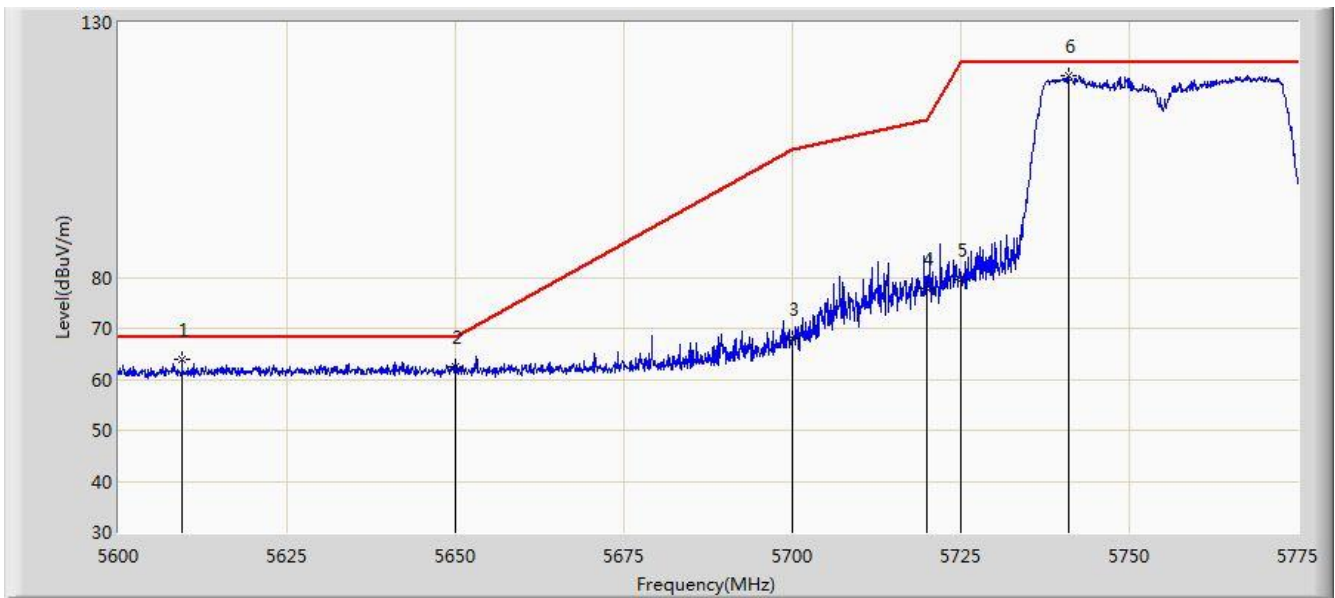


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5609.450	63.865	59.315	-4.335	68.200	4.550	PK
2			5650.000	62.350	57.679	-5.850	68.200	4.671	PK
3			5700.000	67.995	63.117	-37.205	105.200	4.878	PK
4			5720.000	77.806	72.809	-32.994	110.800	4.997	PK
5			5725.000	79.638	74.609	-42.562	122.200	5.029	PK
6		*	5740.962	119.679	114.548	N/A	N/A	5.130	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5755MHz (Beam-Forming Mode)	

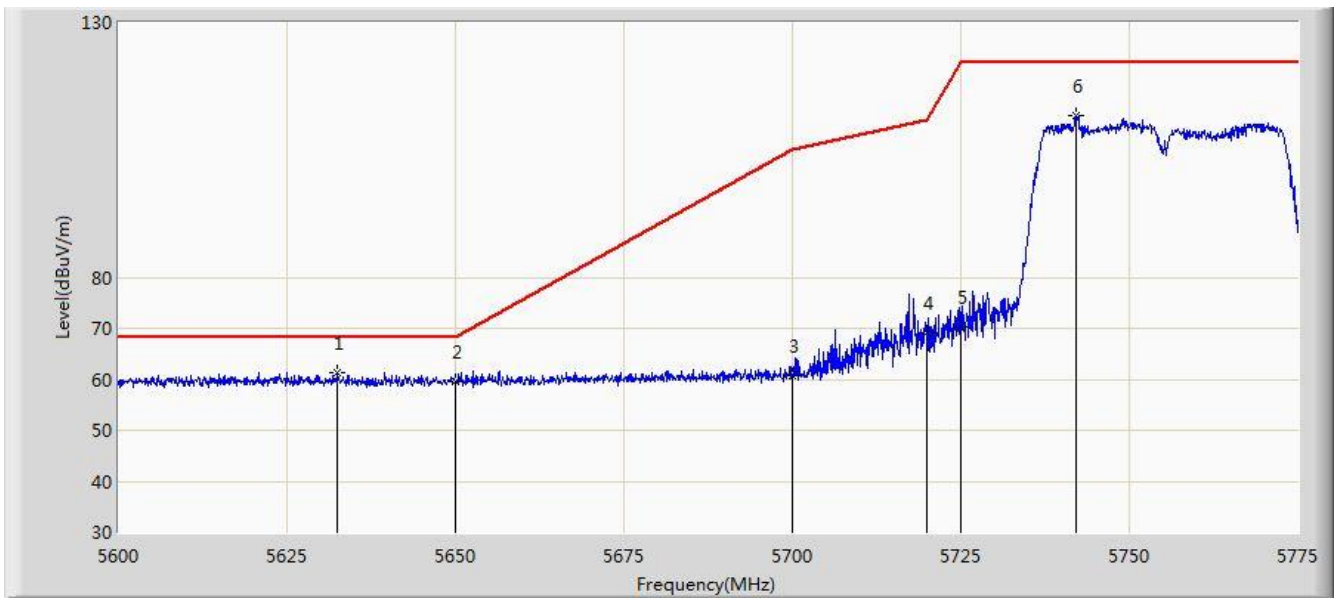


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.462	61.230	56.614	-6.970	68.200	4.616	PK
2			5650.000	59.591	54.920	-8.609	68.200	4.671	PK
3			5700.000	60.613	55.735	-44.587	105.200	4.878	PK
4			5720.000	69.191	64.194	-41.609	110.800	4.997	PK
5			5725.000	70.429	65.400	-51.771	122.200	5.029	PK
6			5742.013	111.672	106.535	N/A	N/A	5.137	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 16:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5795MHz (Beam-Forming Mode)	

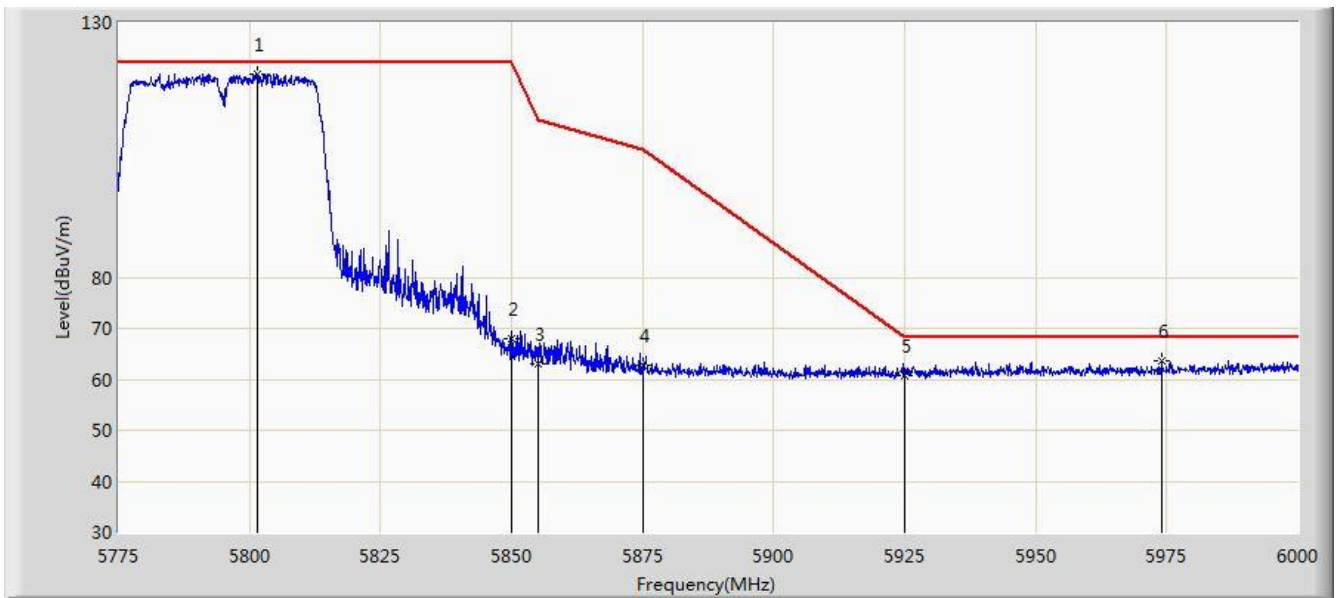


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5801.550	119.908	114.454	N/A	N/A	5.454	PK
2			5850.000	68.050	62.324	-54.150	122.200	5.726	PK
3			5855.000	62.955	57.209	-47.845	110.800	5.746	PK
4			5875.000	62.847	57.027	-42.353	105.200	5.820	PK
5			5925.000	60.764	54.798	-7.436	68.200	5.967	PK
6			5974.013	63.695	57.627	-4.505	68.200	6.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 16:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT40 at channel 5795MHz (Beam-Forming Mode)	

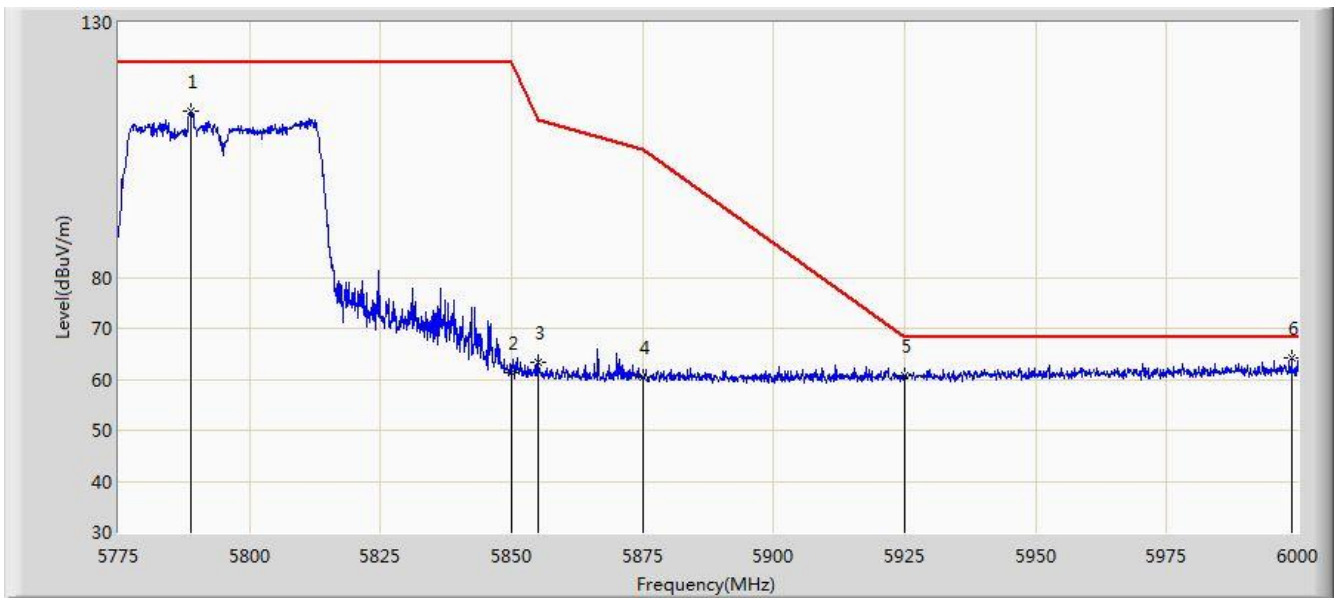


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5788.725	112.626	107.241	N/A	N/A	5.385	PK
2			5850.000	61.309	55.583	-60.891	122.200	5.726	PK
3			5855.000	63.322	57.576	-47.478	110.800	5.746	PK
4			5875.000	60.522	54.702	-44.678	105.200	5.820	PK
5			5925.000	60.733	54.767	-7.467	68.200	5.967	PK
6		*	5998.875	64.081	57.972	-4.119	68.200	6.109	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 16:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5210MHz (Beam-Forming Mode)	

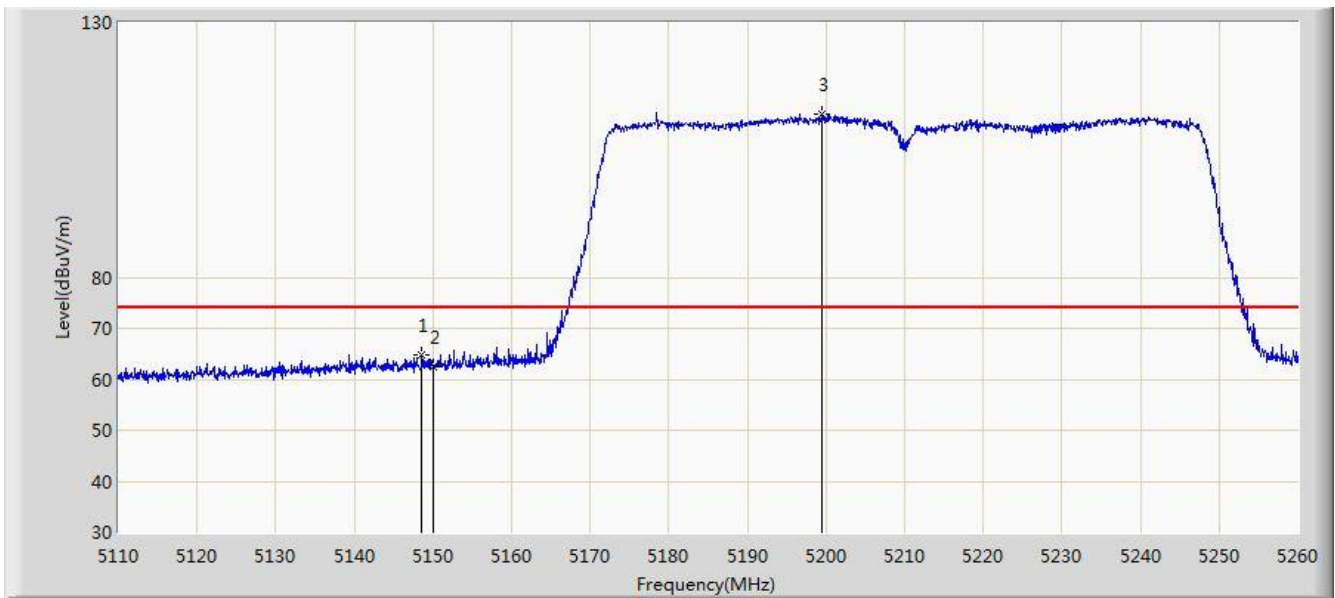


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.625	64.733	60.559	-9.267	74.000	4.174	PK
2			5150.000	62.483	58.314	-11.517	74.000	4.170	PK
3		*	5199.550	112.163	108.163	N/A	N/A	3.999	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5210MHz (Beam-Forming Mode)	

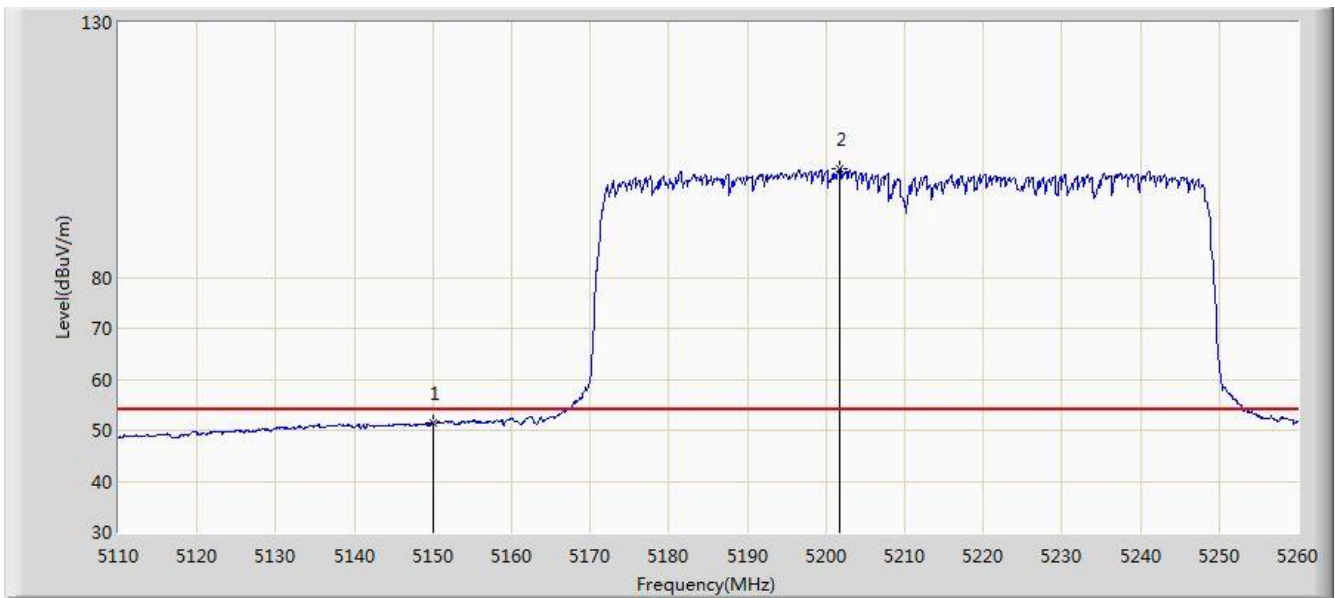


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.372	47.203	-2.628	54.000	4.170	AV
2		*	5201.800	101.399	97.406	N/A	N/A	3.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5210MHz (Beam-Forming Mode)	

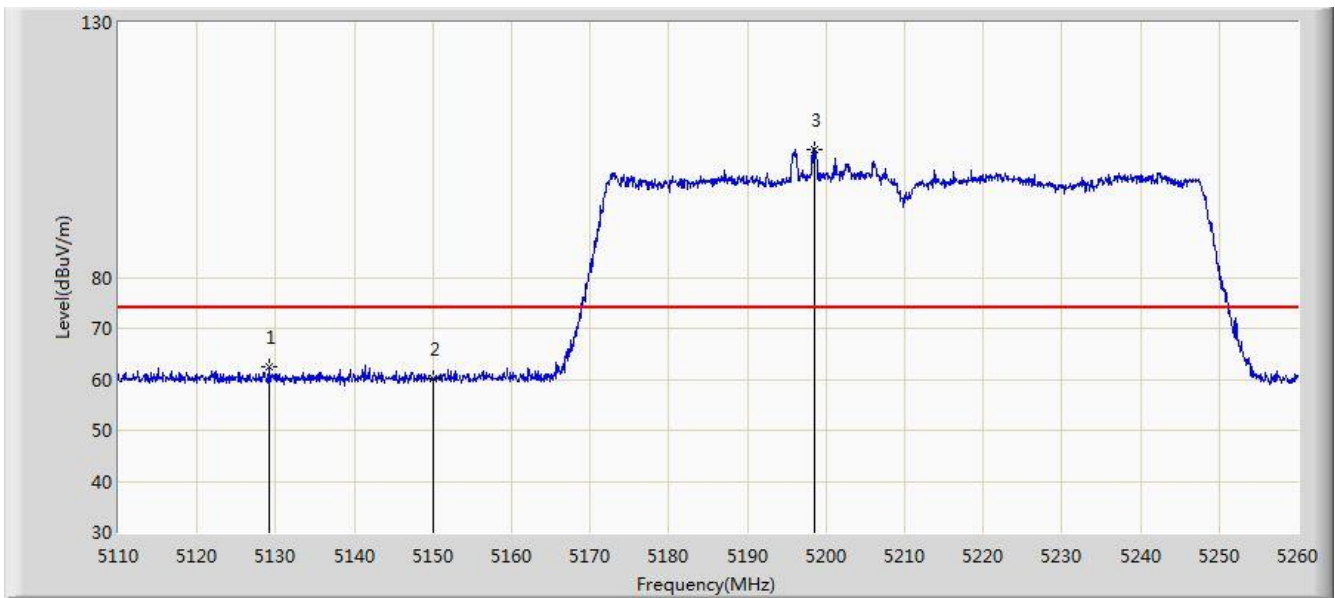


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.125	62.592	58.417	-11.408	74.000	4.175	PK
2			5150.000	60.083	55.914	-13.917	74.000	4.170	PK
3		*	5198.575	105.125	101.122	N/A	N/A	4.002	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5210MHz (Beam-Forming Mode)	

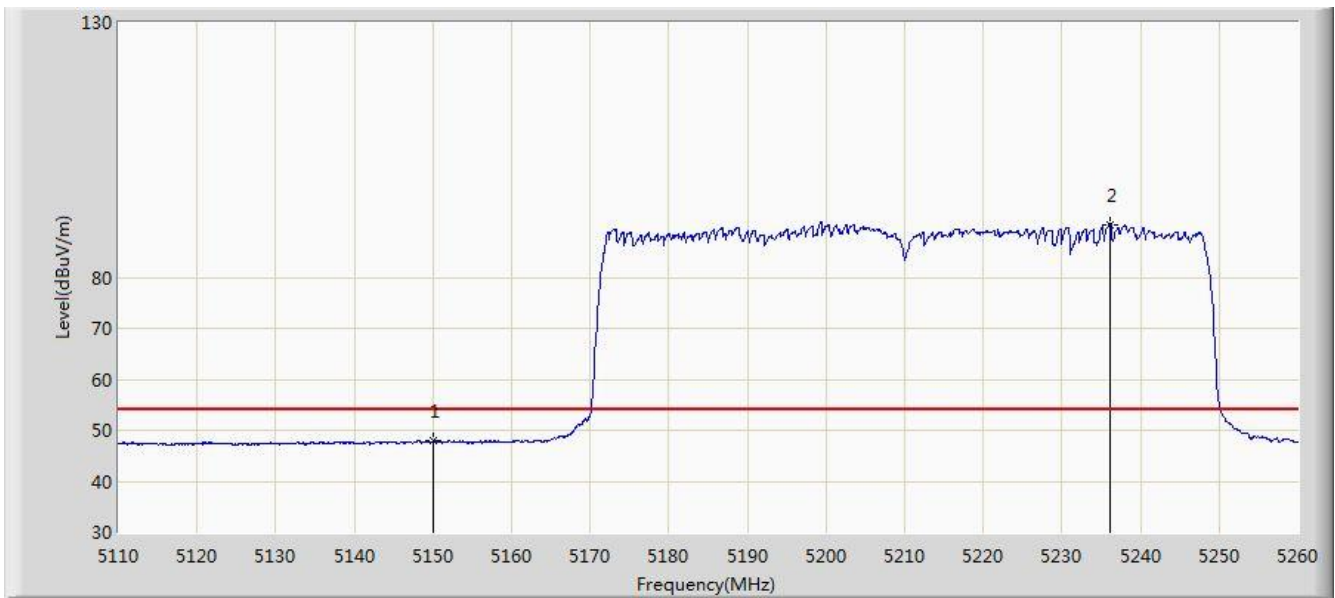


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.845	43.676	-6.155	54.000	4.170	AV
2		*	5236.075	90.414	86.523	N/A	N/A	3.891	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5290MHz (Beam-Forming Mode)	

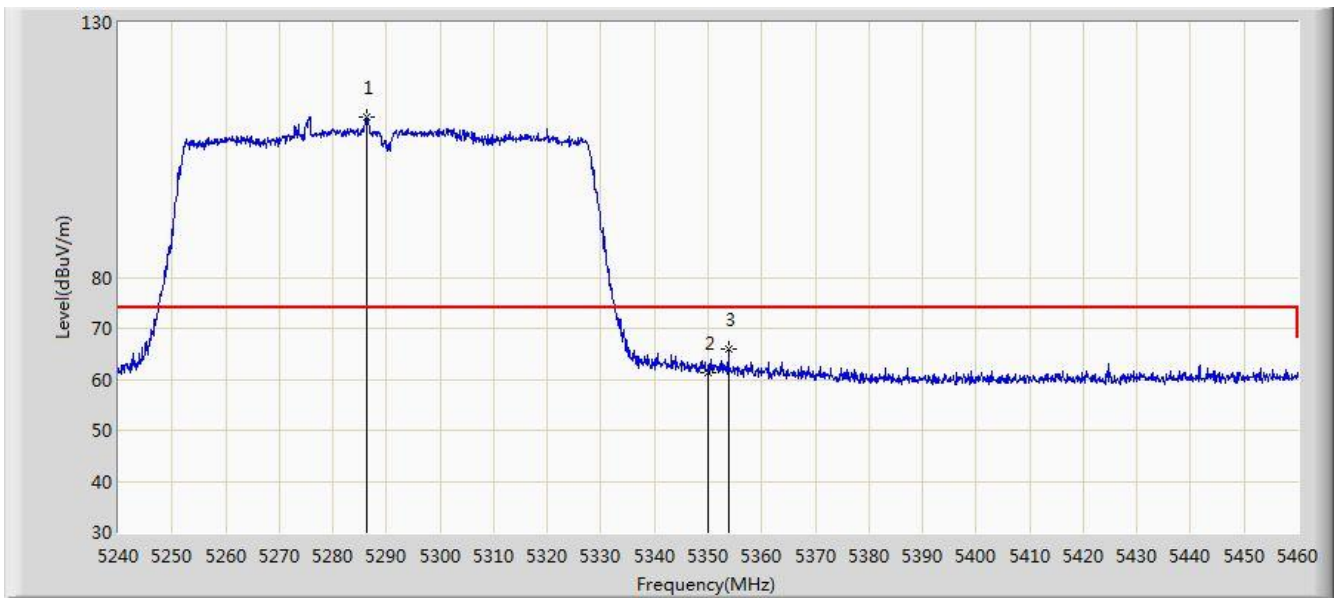


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5286.200	111.578	107.756	N/A	N/A	3.823	PK
2			5350.000	61.425	57.520	-12.575	74.000	3.904	PK
3			5353.740	65.886	61.974	-8.114	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5290MHz (Beam-Forming Mode)	

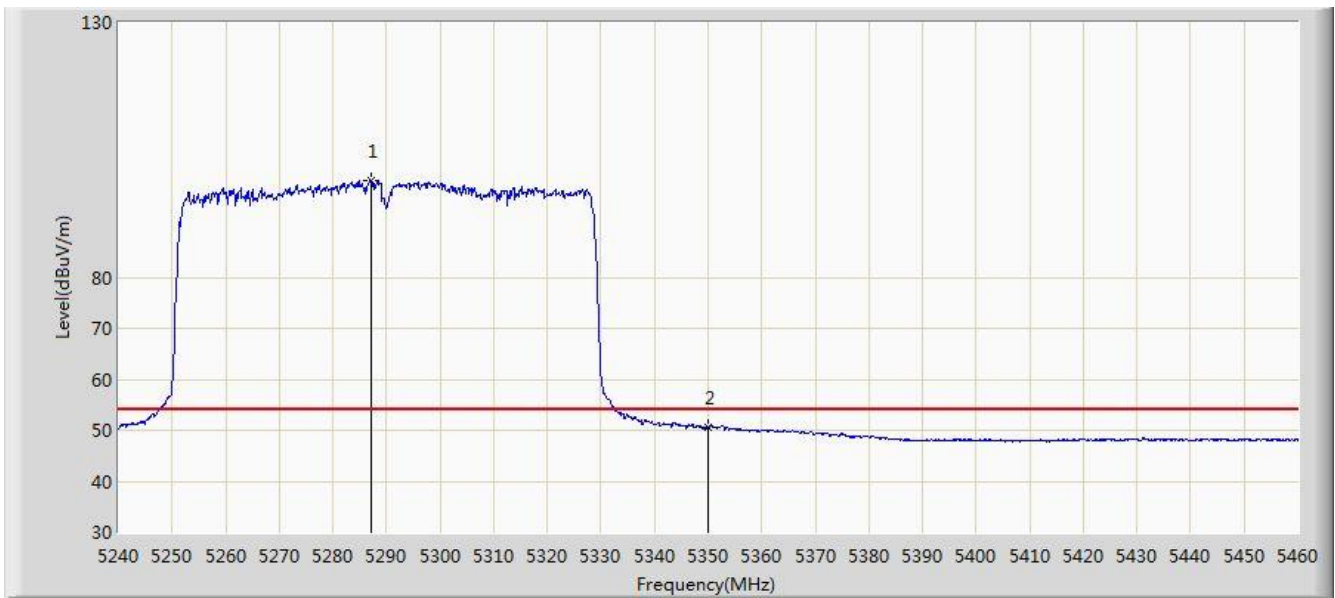


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5287.080	99.114	95.292	N/A	N/A	3.822	AV
2			5350.000	50.673	46.768	-3.327	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5290MHz (Beam-Forming Mode)	

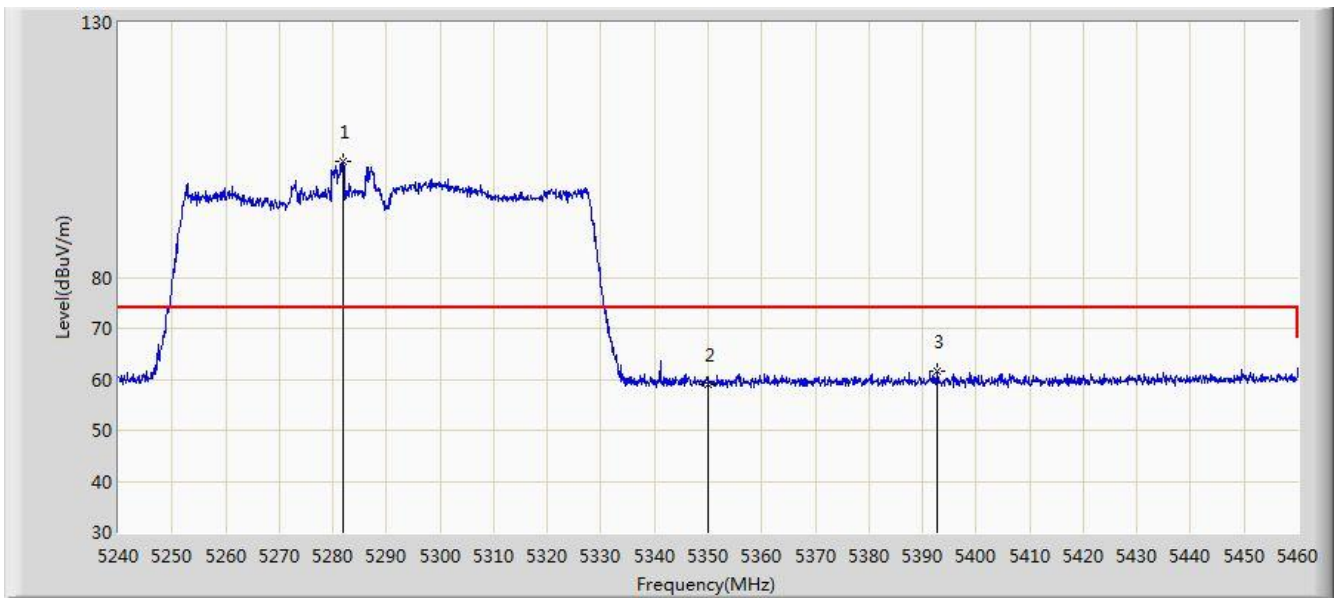


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.800	102.729	98.904	N/A	N/A	3.825	PK
2			5350.000	58.950	55.045	-15.050	74.000	3.904	PK
3			5392.680	61.547	57.564	-12.453	74.000	3.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/13 - 17:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11 ac-VHT80 at channel 5290MHz (Beam-Forming Mode)	

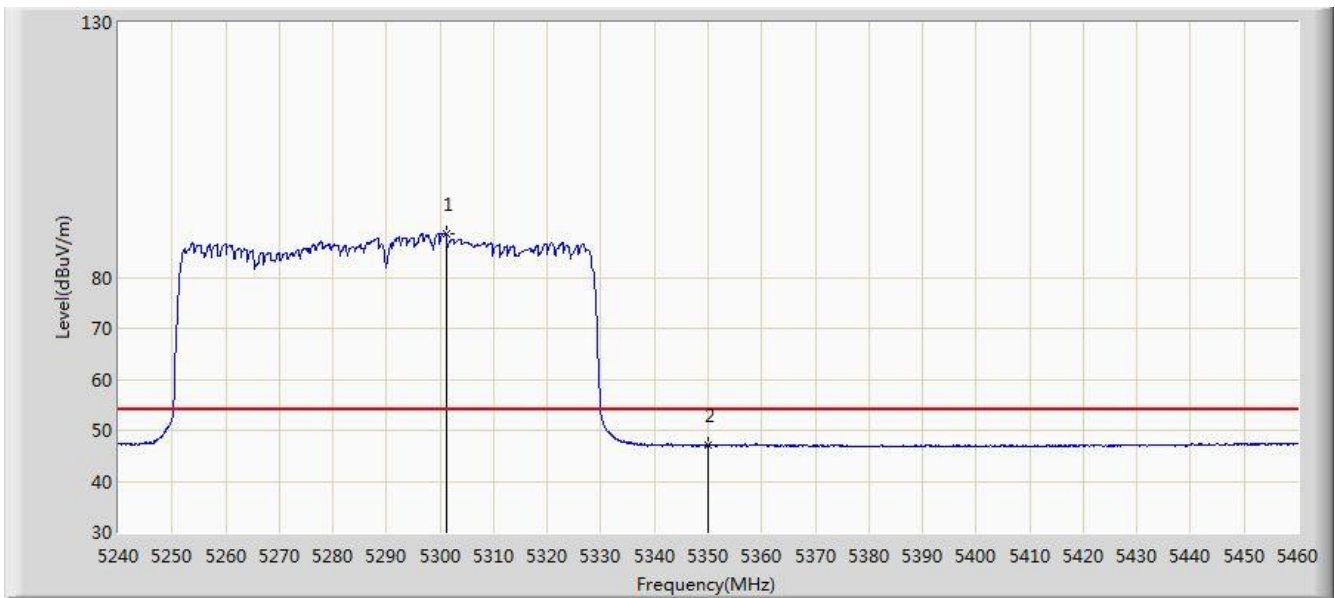

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.160	88.620	84.807	N/A	N/A	3.813	AV
2			5350.000	47.049	43.144	-6.951	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).