

FCC Test Report

Report No. : 1812C60250212502

Applicant : OPEN MIND DEVELOPMENTS
CORPORATION

Address : 604-460 DOYLE AVE., UNIT 604, KELOWNA,
BC V1Y 0C2 Canada

Product Name : JuiceBox Power Bank

Report Date : 2026-06-29

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. Test Equipment List.....	7
1.6. Measurement Uncertainty	7
1.7. Description of Test Facility	7
1.8. Disclaimer.....	7
2. Measurement and Result	8
2.1. Limits For Maximum Permissible Exposure (MPE)	8
2.2. Test Setup	8
2.3. Test Procedure	9
2.4. Test Result	10
APPENDIX I -- TEST SETUP PHOTOGRAPH	14
APPENDIX II -- EXTERNAL PHOTOGRAPH	14
APPENDIX III -- INTERNAL PHOTOGRAPH.....	14

TEST REPORT

Applicant : OPEN MIND DEVELOPMENTS CORPORATION
Manufacturer : OPEN MIND DEVELOPMENTS CORPORATION
Product Name : JuiceBox Power Bank
Model No. : 90010-JUICEBOX-PB
Trade Mark : N/A
Rating(s) : USB-C Input: 5V=3A, 9V=2.22A, 12V=1.67A
USB-C Output: 5V=3A, 9V=2.22A, 12V=1.67A
Wireless Charging Output: 5W, 7.5W, 10W, 15W Max
Battery Capacity: DC 3.87V, 5000mAh, 19.35Wh
Test Standard(s) : FCC Part 1.1310, 1.1307(b)
: FCC Part 2.1093
Test Method(s) : KDB680106 D01 RF Exposure Wireless Charging Apps v04

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & Part 2.1093 & KDB680106 D01, October 25, 2023 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2026-05-06

Date of Test 2026-05-06 to 2026-05-26

Prepared By

Cecilia Chen

(Cecilia Chen)

Approved & Authorized Signer

Jules Guo

(Jules Guo)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-06-29

1. General Information

1.1. Client Information

Applicant	:	OPEN MIND DEVELOPMENTS CORPORATION
Address	:	604-460 DOYLE AVE., UNIT 604, KELOWNA, BC V1Y 0C2 Canada
Manufacturer	:	OPEN MIND DEVELOPMENTS CORPORATION
Address	:	604-460 DOYLE AVE., UNIT 604, KELOWNA, BC V1Y 0C2 Canada
Factory	:	Shenzhen Blue Times Technology Co., Ltd.
Address	:	2nd, 3rd, 4th, 5th, 7th, 8th Floors, Building B, Taixinglong Industrial City, Zhongwu Community, Hangcheng Street, Baoan District, Shenzhen City, Guangdong Province, China

1.2. Description of Device (EUT)

Product Name	:	JuiceBox Power Bank
Model No.	:	90010-JUICEBOX-PB
Trade Mark	:	N/A
Test Power Supply	:	AC 120V/60Hz for Adapter; DC 3.87V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	111-148kHz, 360kHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Xiaomi 33W adapter	Xiaomi	MDY-11-EX	SA62212LA04358J
Apple Phone	Apple	iPhone 12	DNPDJC7T0DYF

1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	Adapter+WPT Mode(5W)(use 111-148kHz)
TM2	Adapter+WPT Mode(7.5W)(use 111-148kHz)
TM3	Adapter+WPT Mode(10W)(use 111-148kHz)
TM4	Adapter+WPT Mode(15W)(use 111-148kHz)
TM5	Adapter+WPT Mode(5W)(use 360kHz)
TM6	Adapter+WPT Mode(7.5W)(use 360kHz)
TM7	Adapter+WPT Mode(10W)(use 360kHz)
TM8	Adapter+WPT Mode(15W)(use 360kHz)
TM9	Standby Mode

Note:

Phone Battery Status: 1%(For WPT 15W), 50%(For WPT 10W), 78%(For WPT 7.5W), 100%(For WPT 5W) were pre-tested, but we only recorded the worst case(Adapter+WPT Mode(15W)(Phone Battery Status: 1%) in this report.

1.5. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
1	Electric and Magnetic field Analyzer	NARDA	EHP-200A	2025-10-14	1 Year

1.6. Measurement Uncertainty

Parameter	Uncertainty
Magnetic Field Reading(A/m)	+/-0.04282(A/m)
Electric Field Reading(V/m)	+/-0.03679(V/m)

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Measurement and Result

2.1. Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				

2.2. Test Setup

1) H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.

2) "Large size" probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), as in the example shown in Figure 1.

If the center of the probe sensing element is located more than 5 mm from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable. The estimates may be done either via numerical calculation, or via analytic model: e.g., approximated formulas for circular coils, dipoles, etc., may be acceptable if it is shown that the model is applicable for the design parameters considered. A typical example is the use of a quasi-static approximation formula for a low-frequency magnetic field source.

These estimates shall include points spaced no more than 2 cm from each other. Thus, in the example of Figure 1, at least the estimates at 0 cm² and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two closest points to the device surface, and with 2-cm increments, as indicated in Figure 1. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared

with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.

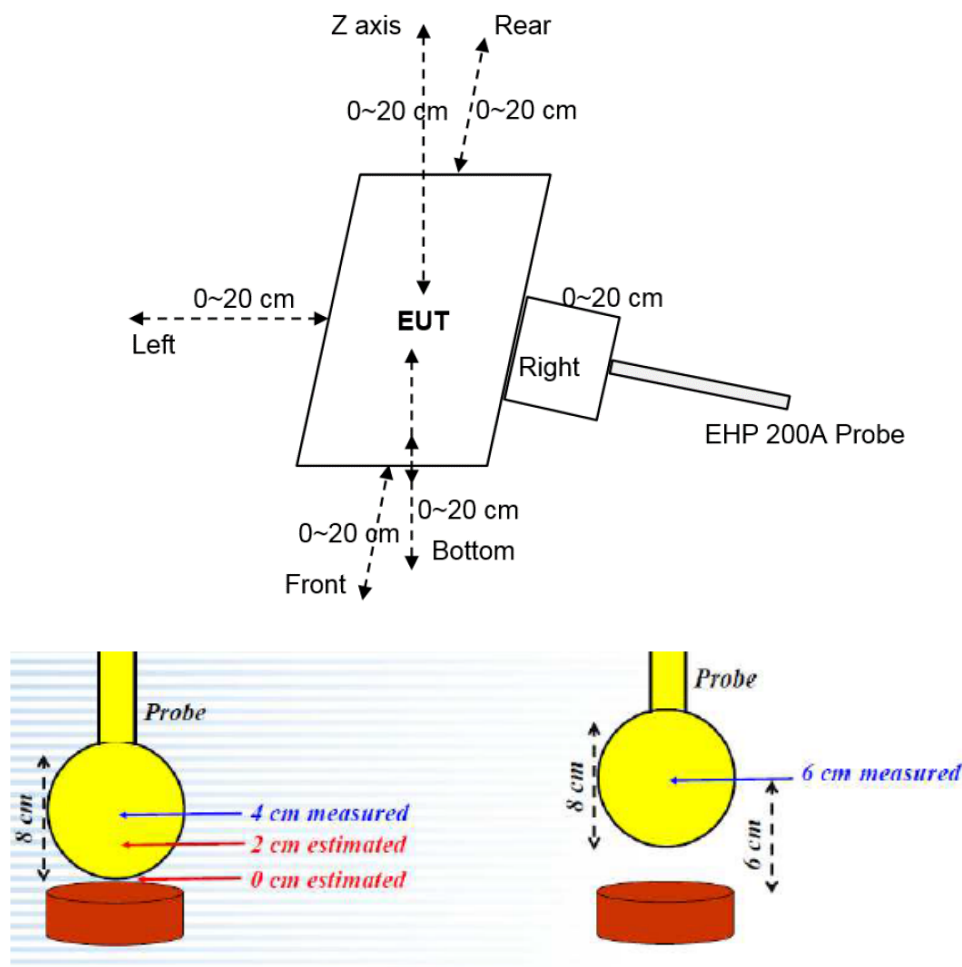


Figure 1

2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance (from 0 cm to 20 cm, in 2 cm minimum increment) which is between the edge/top surface of the charger and the center of the probe. and the measurement probe was placed at required test distance 15cm and 20cm which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (Left, Right, Front, Rear, Z axis, Bottom) were completed.
- 4) The EUT was measured according to the dictates of TCB Workshop, October 25, 2023 and KDB 680106 D01 v04.


Remark: The EUT's test position Left, Right, Front, Rear, Top, Bottom is valid for the E and H field measurements.


2.4. Test Result

2.4.1. Estimated method for portable RF Exposure condition:

According to Calibration information and specification about EHP200A, The Probe EHP200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109 mm. So the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please Refer to below formula). And the result of test distance 6cm~20cm was measured value.

Probe	Length	Width	Height
	109mm	92mm	92mm

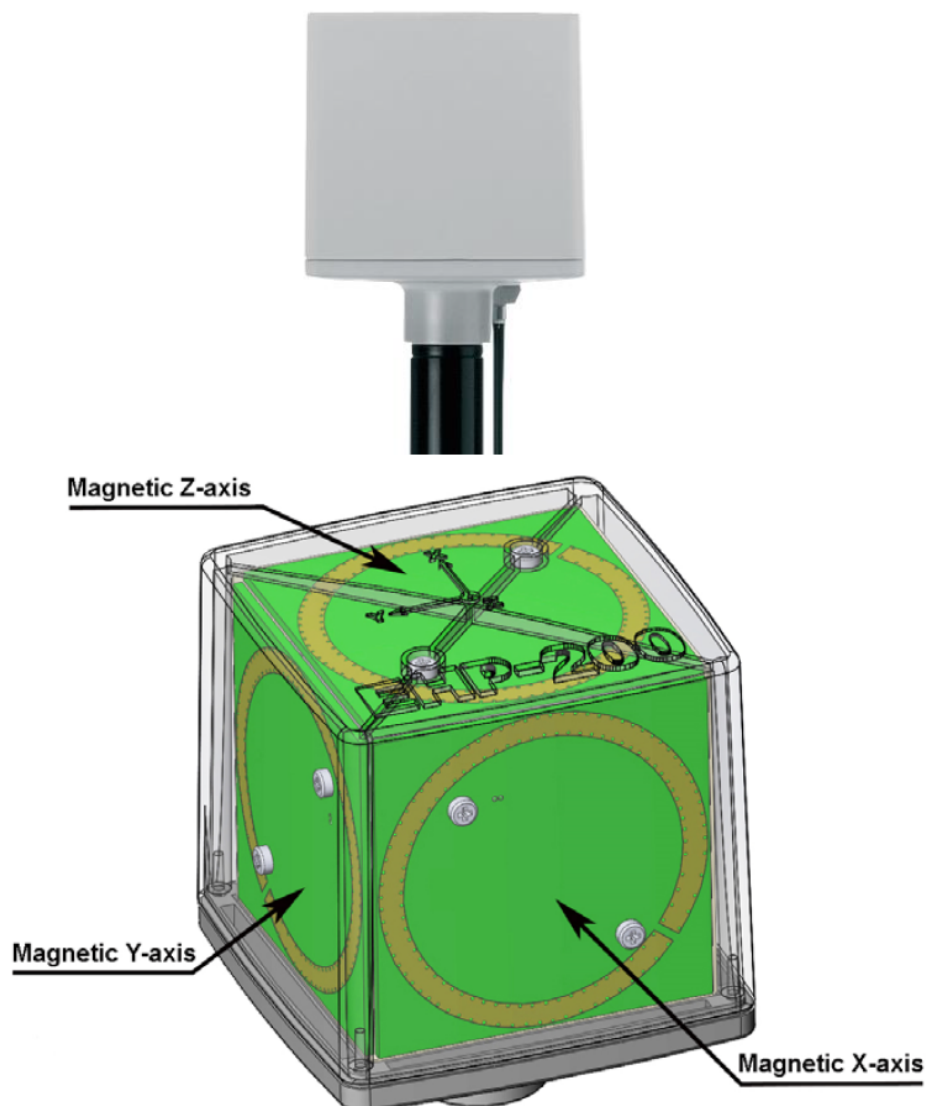


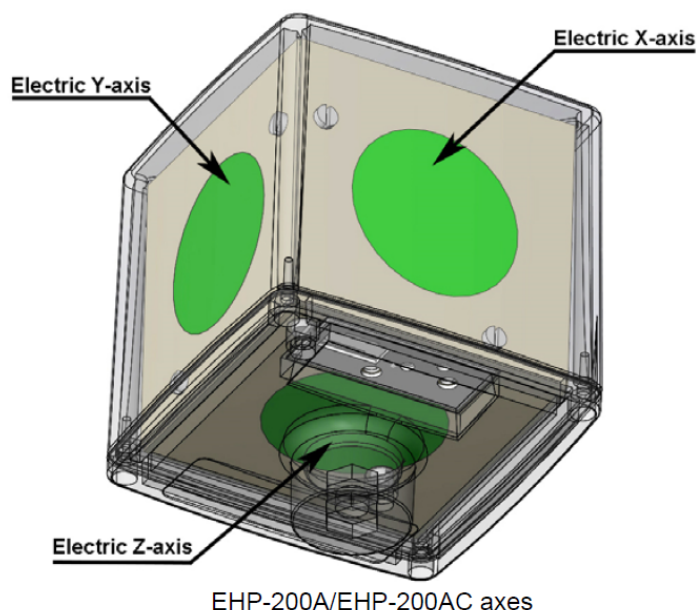

The sensitive elements are located approximately 8 mm below the external surface


We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

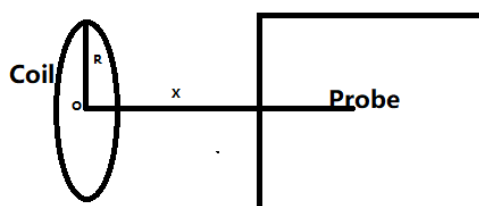

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

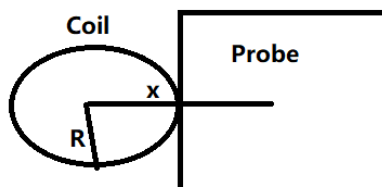

$$B = \frac{\mu_0 * I * N}{2 * x}$$


B: means H-field value;

μ₀ is space permeability; μ₀=4π*10⁻⁷;

I: A current element passing through a coil;

R: means the Radius of coil, the minimum R=38.5mm/2=19.25mm=0.01925m, EUT photos shows

below.

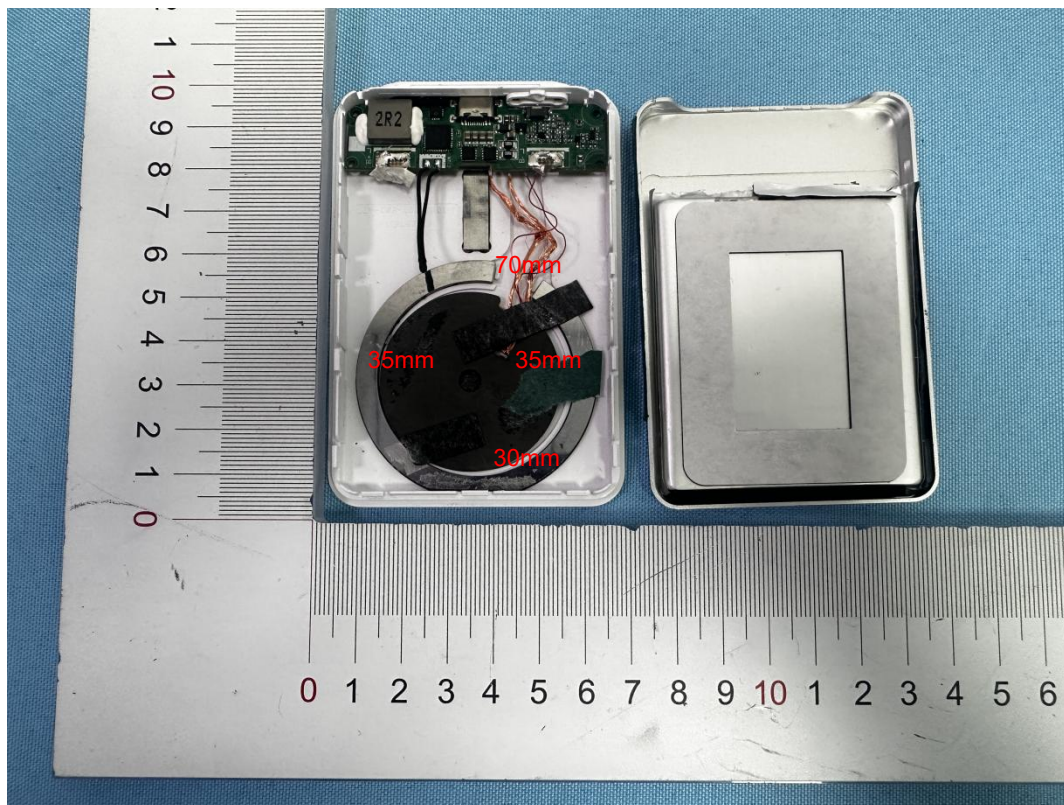

Coil center - Outer Surface of Housing

Emitter to Top: 1 ± 0.3 mm

Emitter to Bottom: 5 ± 0.3 mm

Emitter to Left Side: 35 ± 1 mm

Emitter to Right Side: 35 ± 1 mm

Emitter to Front: 70 ± 1 mm

Emitter to Rear: 30 ± 1 mm

Test distance: The distance from the sensing element of the probe to the edge of the device surface.

x: means the evaluated point to the coil center (For top & bottom side: $x = \text{test distance}$; For other side: $x = \text{test distance} + R$)

N: Number of turns, According to provided "Antenna specification" files: $N = 11$.

For validation purposes: If the value to show a **30% agreement** between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value.

2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	25.2 °C	Humidity:	48 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Between the edge/top surface of the charger and the center of probe

Distance(x)(mm)	Result(A/m)							Limit (A/m)	Limit (%)
	Type	Top	Bottom	Left	Right	Front	back		
0	Estimate	0.0036	0.0486	0.0354	0.0265	0.1649	0.6163	1.63	/
20	Estimate	0.0018	0.0267	0.0259	0.0194	0.0809	0.1815	1.63	/
40	Estimate	0.0012	0.0184	0.0204	0.0153	0.0453	0.0729	1.63	/
Agreement(%)	Calculated	2.6000	3.6000	2.0000	2.6000	8.5000	12.5000	/	30
60	Estimate	0.0010	0.0162	0.0182	0.0140	0.0392	0.0597	/	
60	Measured	0.0009	0.0139	0.0163	0.0130	0.0281	0.0356	1.63	/
Agreement(%)	Calculated	2.6000	2.5000	1.3000	2.0000	7.1000	10.2000	/	30
80	Calculated	0.0009	0.0145	0.0163	0.0129	0.0342	0.0505	/	/
80	Measured	0.0007	0.0134	0.0160	0.0121	0.0268	0.0345	1.63	/
100	Measured	0.0006	0.0127	0.0151	0.0106	0.0254	0.0329	1.63	/
120	Measured	0.0005	0.0116	0.0139	0.0099	0.0232	0.0318	1.63	/
140	Measured	0.0004	0.0108	0.0124	0.0093	0.0215	0.0306	1.63	/
160	Measured	0.0003	0.0104	0.0113	0.0088	0.0203	0.0287	1.63	/
180	Measured	0.0002	0.0099	0.0105	0.0083	0.0188	0.0264	1.63	/
200	Measured	0.0001	0.0087	0.0098	0.0079	0.0177	0.0251	1.63	/

Note:

- (1) Position E is top side.
- (2) All modes has been tested, only the worst situation (Adapter+WPT Mode(15W)(Phone Battery Status: 1%)) was recorded in the report.
- (3) All three axes the device has been tested, only the worst results reported.
- (4) All positions have been tested, only display photos of Position E and A in the report.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

