



沃德检测

TEST REPORT

Applicant Name: XiangLu Robotics (Beijing)
Limited

Product Name: SLP 400 Pro

Model: XGC07P-01

Test Report Number: WD25121075RA3

Worldtest (GuangDong) Co., Ltd.

Room 102 and 201, Building 6, No.6, Gongye North Road, Songshan Lake(SSL), Dongguan,
Guangdong, China

Tel: 400 888 2955 & 0769-22891258
Email: service.vip@worldtest.cn

Fax: 0769-22891235
Web: www.worldtest.cn&www.worldtest.com.cn

Applicant Information

Company Name: XiangLu Robotics (Beijing) Limited
Address: Room 401, 4th Floor, "Ocean Star Sail Plaza · Beiyuan Center", Building 1, Courtyard No. 28, Beiyuan Road, Chaoyang District, Beijing

Manufacturer Information


Company Name: Xianglu Robot(Dongguan) Co., Ltd.
Address: No. 55, Xinyuan Second Road, Songbailang Village, Dalang Town, Dongguan City, Guangdong Province.


EUT Information

EUT Name: SLP 400 Pro
Model: XGC07P-01
Brand: 
Sample Received Date: Dec.04, 2025
Sample Status: Normal
Sample ID: WD-YP251204001
Date of Tested: Jan. 09,2026 to Jan. 14,2026

Standard(s)
MIC Notice No.88 Appendix No.43
MIC Article 2-1 Item (19)

Issued By: Worldtest (GuangDong) Co., Ltd.
Address: Room 102 and 201, Building 6, No.6, Gongye North Road, Songshan Lake(SSL), Dongguan, Guangdong, China

Prepared by: 
Lucian Zhou / Feb,06, 2026

Reviewer by: 
Barlow Lv/ Feb,06, 2026


Approved by: 
Lam Liu/ Feb,06, 2026

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. SUMMARY OF TEST RESULTS	5
1.1. TEST METHODOLOGY	6
1.2. TEST FACILITIES	6
1.3. MEASUREMENT UNCERTAINTY	6
1.4. TEST EQUIPMENT LIST AND DETAILS	6
2. GENERAL INFORMATION	8
2.1. GENERAL DESCRIPTION OF EUT	8
2.2. ANTENNA LIST	8
2.3. CHANNEL LIST	8
2.4. TEST CHANNEL CONFIGURATION	9
2.5. DESCRIPTION OF AVAILABLE ANTENNAS	9
2.6. THE WORSE CASE POWER SETTING PARAMETER	9
2.7. TEST CONDITIONS	10
2.8. DESCRIPTION OF TEST SETUP	10
2.9. TEST SYSTEM CONFIGURATION	11
2.10. TEST ENVIRONMEN	11
3. TEST PROCEDURES AND RESULTS	12
3.1. Frequency Tolerance	12
3.2. Antenna power, antenna power tolerance and E.I.R.P.	13
3.3. Occupied Bandwidth	14
3.4. Carrier Sensing Function	15
3.5. Duty cycle	17
3.6. Transmitter Spurious Emissions	18
3.7. Receiver Spurious Emissions	19
3.8. Interference Preverntion fuction	20
Appendix A: Frequency Tolerance	21
Test Result	21
Appendix B: Antenna power, antenna power tolerance and E.I.R.P.	28
Test Result	28
Appendix C: Occupied Bandwidth	42
Test Result	42
Appendix D: Transmitter Spurious Emissions	49
Test Result:	49
Appendix E: Receiver spurious emissions	78
Test Result:	78
Appendix F: Duty cycle	94
Test Result:	94
PHOTOS	97

RELEASE CONTROL RECORD

Issue No.	Description	Issued Date
WD25121075RA3	Original release.	Feb,06, 2026

1. SUMMARY OF TEST RESULTS

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

Technical requirements for Frequency Hopping equipment

Performed Test Item	Normative References	Test Performed
Antenna power, antenna power tolerance and E.I.R.P.	MIC Notice No. 88 Appendix No. 43 Clause 6	Yes
Carrier Sensing Function 1	MIC Notice No. 88 Appendix No. 43 Clause 8	No (Note 1)
Carrier Sensing Function 2	MIC Notice No. 88 Appendix No. 43 Clause 8	Yes
Occupied Bandwidth	MIC Notice No. 88 Appendix No. 43 Clause 4	Yes
Frequency Tolerance	MIC Notice No. 88 Appendix No. 43 Clause 3	Yes
Duty Cycle	MIC Notice No. 88 Appendix No. 43	Yes
Transmitter Spurious Emissions	MIC Notice No. 88 Appendix No. 43 Clause 5	Yes
Receiver Spurious Emissions	MIC Notice No. 88 Appendix No. 43 Clause 7	Yes
Interference Prevention function	MIC Notice No. 88 Appendix No. 43 Clause 12	Good

Note 1: Application to transmitting devices which EIRP is less than 【2.14dBi + antenna power limit】 and the shortage of EIRP is compensated by the antenna power, Not applicable to this product.

Note 2: Application to transmitting devices with OFDM modulation and The occupied bandwidth greater than 26MHz ,Not applicable to this product.

1.1. TEST METHODOLOGY

All tests were performed in accordance with the procedures documented in MIC Notice No.88 Appendix No.43

1.2. TEST FACILITIES

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	lenovo	S14 G2 ITL	PF4119QS	Power by adapter
2	Serial cable	N/A	N/A	N/A	Unshielded,0.8m
3	SMA cable	N/A	N/A	N/A	Shielded,0.8m
4	Power cable	N/A	N/A	N/A	Unshielded,0.8m

1.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power Conducted	$\pm 1.15\text{dB}$
RF Power Radiated	$\pm 3.5\text{dB}$
Occupied Channel Bandwidth	$\pm 1.17\%$
Spurious Emissions, Conducted	$\pm 1.68\text{dB}$
Spurious Emissions, Radiated	$\pm 3.5\text{dB}$
Humidity	$\pm 1\%$
Temperature	$\pm 0.5^{\circ}\text{C}$
Time	$\pm 8\%$

1.4. TEST EQUIPMENT LIST AND DETAILS

RF Conducted Test System					
Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Interval
RF Control Unit	Tonscend	JS0806-2	23F80620689	2025-08-30	1 Year
DC Power Supply	Agilent	E3642A	MY40000323	2025-08-30	1 Year
MClean Robot Vector Signal Generator	Agilent	N5182A	MY50141372	2025-08-30	1 Year
MClean Robot Analog Signal Generator	Agilent	N5181A	MY47421166	2025-08-30	1 Year
Spectrum analyzer	Agilent	N9010A	MY50483285	2025-01-22	1 Year
Software					
Description	Manufacturer		Name		Version
Tonsend SRD Test System	Tonsend		JS1120-3 RF Test System		2.6.77.0518
Measuring Equipment Calibration Information					

Used	Calibration Company Abbreviation	Full Name of calibration company
☒	GRGTEST	GRG METROLOGY & TEST GROUP CO.,LTD.
Calibration Information		
☐	a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) ora designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act	
☒	(c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act (	
☐	d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above	

2. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

EUT Name	SLP 400 Pro
Model Name	XGC07P-01
Radio Technology	IEEE802.11b/g/n/ax HT20,HT40
Operation frequency	IEEE 802.11b: 2412MHz—2472MHz IEEE 802.11g: 2412MHz—2472MHz IEEE 802.11n,ax HT20: 2412MHz—2472MHz IEEE 802.11n,ax HT40: 2422MHz—2462MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20,HT40 OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HT20,HT40 OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK)
Antenna description	BT,BLE,WiFi uses Ant 1
Rating	AC 200V 3P~ 50Hz/60Hz 7kW

Note: 802.11ax only supports Full RU.

2.2. ANTENNA LIST

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☒	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Patch		
	☒	Internal	☒	Dipole		
			☐	PCB		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
			☐	stamping antenna		
Antenna Gain Reference	1.5dBi					

2.3. CHANNEL LIST

Channel List for IEEE 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452	13	2472
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	12	2467	/	/

Channel List for IEEE 802.11n/ax (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	/	5	2432	9	2452	13	/
2	/	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	12	/	/	/

2.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 7(MID Channel), CH 13(High Channel)	2412 MHz, 2442 MHz, 2472 MHz
g	CH 1(Low Channel), CH 7(MID Channel), CH 13(High Channel)	2412 MHz, 2442 MHz, 2472 MHz
n/ax HT20	CH 1(Low Channel), CH 7(MID Channel), CH 13(High Channel)	2412 MHz, 2442 MHz, 2472 MHz
n/ax HT40	CH 3(Low Channel), CH 7(MID Channel), CH 11(High Channel)	2422 MHz, 2442 MHz, 2462 MHz

2.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)	Uncorrelated directional gain(dBi)
ANT 1	2412 ~ 2472	Dipole Antenna	1.5dBi	

IEEE Std. 802.11	Transmit and Receive Mode	Description
b/g/n/ax	1TX, 1RX	Separate individual antenna can be used as transmitting/receiving .

Note: The value of the antenna gain was declared by customer.

2.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5 MHz Band							
Test Software		RFTTestTool.apk					
IEEE Std. 802.11	Transmit Antenna Number	Test Software Setting Value					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 7	CH 13	CH 3	CH 7	CH 11
b/g/n/ax SISO	1	default	default	default	N/A		
n/ax SISO	1	N/A			default	default	default

2.7. TEST CONDITIONS

The WIFI module was tested while in a continuous transmitter/receiver mode.

The eut was tuned to a low,middle and high channel for all tests.For all test case pre/scans were completed in all modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input DC Power	24.00V	26.40V	21.60V
RF Chip	3.3V	3.3V	3.3V
Voltage Variation	0	0%	0%

Note:The voltage here is the power supply voltage for the touch screen. The variation of the chip's power supply voltage does not exceed 1%. Only the normal voltage condition is tested.

2.8. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

Follow up the claims of the applicant

TEST SETUP


The EUT can work in engineering mode during the testing.

SETUP DIAGRAM FOR TESTS

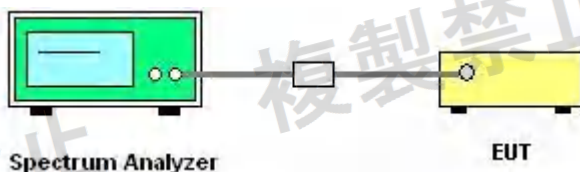

2.9. TEST SYSTEM CONFIGURATION

Test System(for all test items)

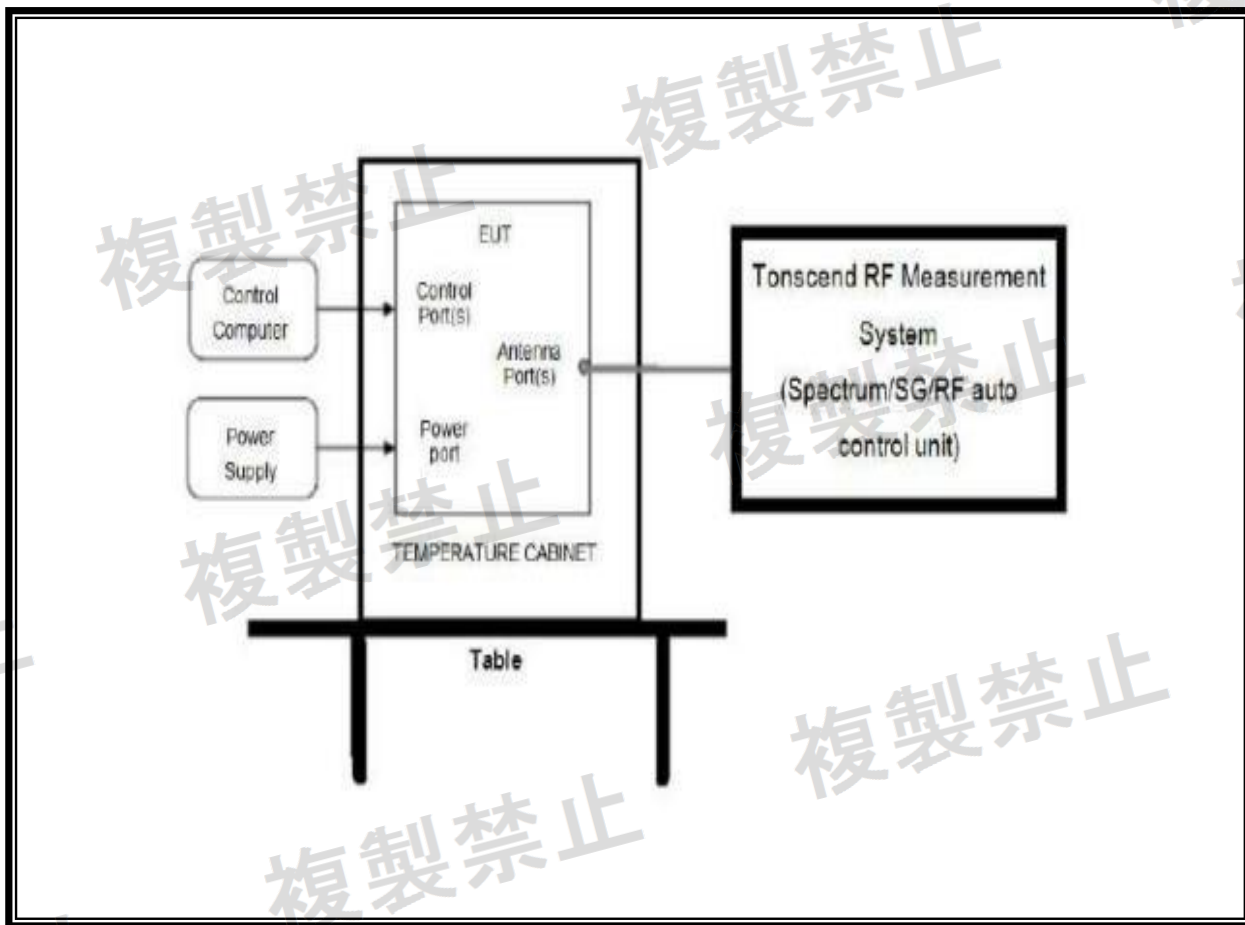

2.10. TEST ENVIRONMEN

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	56
Barometric pressure (mbar)	860-1060	1001

3. TEST PROCEDURES AND RESULTS

3.1. FREQUENCY TOLERANCE

LIMITS

$\cong \pm 50$ ppm

TEST PROCEDURE

1. Frequency accuracy of instrument shall be less than 10% of limits tolerance (5ppm).
2. Three testing methods
 - a. Measure frequency tolerance by the system simulator.
 - b. CW Tone method
Setting of SA is following as: RBW:10kHz / VBW:10kHz.
Maker Max. level to get measuring frequency f.
 - c. 10dB down method
Setting of SA is following as: RBW:100kHz / VBW: 100kHz / Trace: MaxHold
Display line Level = Max. level – 10dB to place two markers, highest(fH) and lowest(fL) frequency
Determine measuring frequency $f = (fH+fL)/2$
3. The frequency tolerance test case is directly measured using the frequency accuracy function of Wifi tester or spectrum analyzer. Then the frequency error formula is $(f-fc)/fc \times 10^{-6}$ ppm and the limit is less than ± 50 ppm.

RESULTS

Please refer to appendix A.

3.2. ANTENNA POWER, ANTENNA POWER TOLERANCE AND E.I.R.P.

LIMITS

Output Power must be 10 mW/MHz or less. For Bandwidth is within 26M
Output Power must be 5 mW/MHz or less. For Bandwidth is within 26M to 40M

Output Power Tolerance: +20%

EIRP must be 12.14 to 22.14 dBm/MHz or less. For Bandwidth is within 26M
EIRP must be 9.13 to 19.13 dBm/MHz. For Bandwidth is within 26M to 40M

TEST PROCEDURE

Search Frequency of Peak Power

Test Frequency: test channel

RBW=VBW=1MHZ, SPAN=40MHZ, Sweep time=Auto, Detector mode=Positive peak

Note: SPAN adjusts according to the bandwidth mode of the measured object. In the 20 MHz bandwidth mode, it is set to 40 MHz, and in the 40 MHz bandwidth mode, it is set to 80 MHz.

Measure of average burst power

Test Frequency: frequency of peak power

RBW=VBW=1MHZ, SPAN=0Hz, Sweep time=Auto, Detector mode=RMS

Reading Level=burst power

$EIRP = D + G + 10 \log (1/x)$

D: antenna power ; G: antenna gain x: duty Cycle

RESULTS

Please refer to appendix B.

3.3. OCCUPIED BANDWIDTH

LIMIT

≤26 MHz for DSSS&OFDM, 40 MHz bandwidth mode is 26 - 40 MHz.

TEST PROCEDURE

A spectrum analyzer or similar device shall be used to observe a sample of the modulated transmitter's radio frequency power output.

1. A positive peak detector function must be used.
2. A measurement instrument with an integrated 99% power bandwidth function may be used to automate the test process.
3. The measurement instrument bandwidth and span must be set sufficiently with, and, the scan time set sufficiently slow, to ensure all major modulation products are captured. Note that the measurement bandwidth should also be set sufficiently narrow to avoid adding significant error to the test result.
4. 'Maximum Hold' mode may be used to accumulate the measurement result over several scans provided the emission is repetitive in nature.

Spectrum Analyzer Conditions:

RBW : 300kHz

VBW : 300kHz

Span: 40MHz

Note: SPAN adjusts according to the bandwidth mode of the measured object. In the 20 MHz bandwidth mode, it is set to 40 MHz, and in the 40 MHz bandwidth mode, it is set to 80 MHz.

Sweep time : Auto, Marker : Marker Off

Log scale : 10dB/Div,

Data points : 1001points or more

Detection : Sample, Sweep mode : Continuous

Measurement Procedure and Capture Image

A,B -> Storage -> Average -> Averaging count -> 100 -> enter
Measure -> more -> Occupied Bandwidth -> N% Ratio -> 99%

RESULTS

Please refer to appendix C.

3.4. CARRIER SENSING FUNCTION

LIMIT

Item	Limits (See Article 49-20, Item1-k of the Ordinance Regulating Radio Equipment)
Carrier Sense	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79+Gr-20*\log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)
Remarks	This test item will be applied to OFDM, $26MHz < BW \leq 38MHz$

TEST PROCEDURE


Test method which surpass to Clause 8,9 of Annex No.43 of MIC Notification No.88.

- SSG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SSG and power level is (On $22.79+Gr-20*\log(f)$ [dBm] (Gr: dBi; f: MHz). Then turn off the RF signal of SSG.
- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA is following as: RBW:1MHz / VBW:1MHz / SPAN: 50MHz / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak.
- SSG RF Signal On.
- EUT shall be stop the transmitted any signal and SSG RF Signal Off. Then EUT will be continuous transmitted signal.

Spectrum setting

Spectrum Parameter	Setting
Attenuation	Auto
RBW / VBW	1 MHz
Span	0 MHz
Sweep	Continuous
Detector	Peak
Trigger mode	Video

Test setting

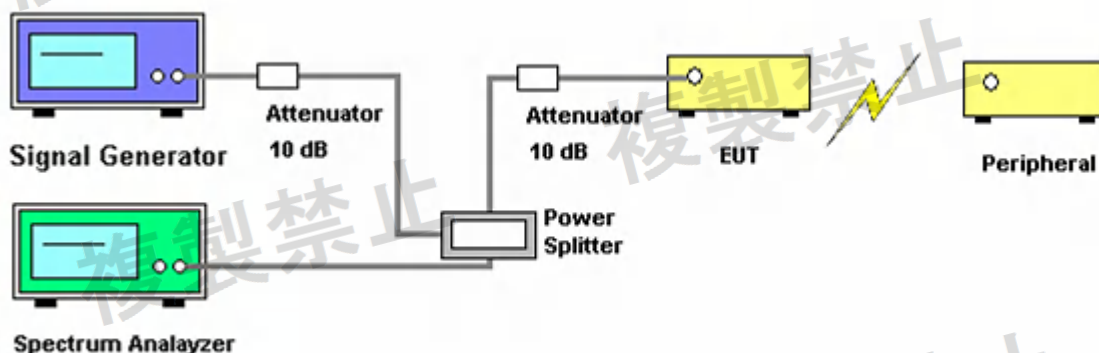

RESULTS

Test Power	Normal Voltage
Test Mode	802.11 n40,ax40
Test Result	Good

3.5. DUTY CYCLE

LIMITS

N/A

TEST PROCEDURE

A spectrum analyzer or similar device shall be used to observe a sample of the modulated transmitter's radio frequency power output.

1. A positive peak detector function must be used.
2. The center frequency is set to the test frequency and the span is switched to zero.
3. The measurement instrument bandwidth and span must be set sufficiently with, and, the scan time set sufficiently slow, to ensure all major modulation products are captured. Note that the measurement bandwidth should also be set sufficiently narrow to avoid adding significant error to the test result.
4. 'Single sweep' mode may be used to capture a packet over a single scan.

RESULTS

Please refer to appendix F.

3.6. TRANSMITTER SPURIOUS EMISSIONS

LIMITS

$\leq 2.5\mu\text{W}/\text{MHz}$ or less for 30 – 2387 MHz
 $\leq 25\mu\text{W}/\text{MHz}$ or less for 2387 – 2400 MHz
 $\leq 25\mu\text{W}/\text{MHz}$ or less for 2483.5 – 2496.5 MHz
 $\leq 2.5\mu\text{W}/\text{MHz}$ or less for 2496.5 – 12500 MHz

TEST PROCEDURE

A spectrum analyzer or similar device shall be used to observe a sample of the modulated transmitter's radio frequency power output.

1. A positive peak detector function must be used.
2. The measurement instrument bandwidth and span must be set sufficiently with, and, the scan time set sufficiently slow, to ensure all major modulation products are captured. Note that the measurement bandwidth should also be set sufficiently narrow to avoid adding significant error to the test result.
3. 'Maximum Hold' mode may be used to accumulate the measurement result over several scans provided the emission is repetitive in nature.

Spectrum Analyzer Conditions:

RBW : 1MHz

VBW : 1MHz

Sweep time : Auto

Trace mode:Max hold

Log scale : 10dB/Div,

Data points : 8001points or more

Detection : Peak, Sweep mode : Continuous

RESULTS

Please refer to appendix D.

3.7. RECEIVER SPURIOUS EMISSIONS

LIMITS

$\leq 4\text{nW}$ for 30 – 1000 MHz
 $\leq 20\text{nW}$ for 1000 – 12750 MHz

TEST PROCEDURE

A spectrum analyzer or similar device shall be used to observe a sample of the modulated transmitter's radio frequency power output.

1. A positive peak detector function must be used.
2. The measurement instrument bandwidth and span must be set sufficiently with, and, the scan time set sufficiently slow, to ensure all major modulation products are captured. Note that the measurement bandwidth should also be set sufficiently narrow to avoid adding significant error to the test result.
3. 'Maximum Hold' mode may be used to accumulate the measurement result over several scans provided the emission is repetitive in nature.

Spectrum Analyzer Conditions:

RBW : 100kHz(Below 1000MHz)/1MHz(Above 1000MHz)

RBW=VBW

Sweep time : Auto

Trace mode:Max hold

Log scale : 10dB/Div,

Data points : 8001points or more

Detection : Peak, Sweep mode : Continuous

RESULTS

Please refer to appendix E.

3.8. INTERFERENCE PREVENTION FUNCTION

LIMITS

N/A

Requirement:

The EUT shall have the interference prevention capability to transmit or to receive the identification Automatically, so that sender and receiver shall exclude other equipment.

TEST PROCEDURE

In the case that the EUT has the function of automatically transmitting the identification code:

- 1) Transmit the predetermined identification codes from EUT
- 2) Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

- 1) Transmit the predetermined identification codes from the counterpart.
- 2) Check if communication is normal
- 3) Transmit the signal other than predetermined ID codes from the counterpart.
- 4) Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones

Mac: 20-08-EC-AH-3B-2C


RESULTS

Good, EUT performed relevant functional tests as required, and the product signal was normal.


Appendix A: Frequency Tolerance

Test Result


TestCondition	TestMode	Antenna	Freq(MHz)	Result[ppm]	Limit[ppm]	Verdict
NTNV	11B	Ant1	2412	-8.29187	±50	PASS
			2442	16.38002	±50	PASS
			2472	16.18123	±50	PASS
	11G	Ant1	2412	0.00000	±50	PASS
			2442	8.19001	±50	PASS
			2472	0.00000	±50	PASS
	11N20SI SO	Ant1	2412	0.00000	±50	PASS
			2442	0.00000	±50	PASS
			2472	-8.09062	±50	PASS
	11N40SI SO	Ant1	2422	0.00000	±50	PASS
			2442	0.00000	±50	PASS
			2462	0.00000	±50	PASS
	11AX20S ISO	Ant1	2412	0.00000	±50	PASS
			2442	24.57003	±50	PASS
			2472	-16.18123	±50	PASS
	11AX40S ISO	Ant1	2422	0.00000	±50	PASS
			2442	-16.38002	±50	PASS
			2462	0.00000	±50	PASS

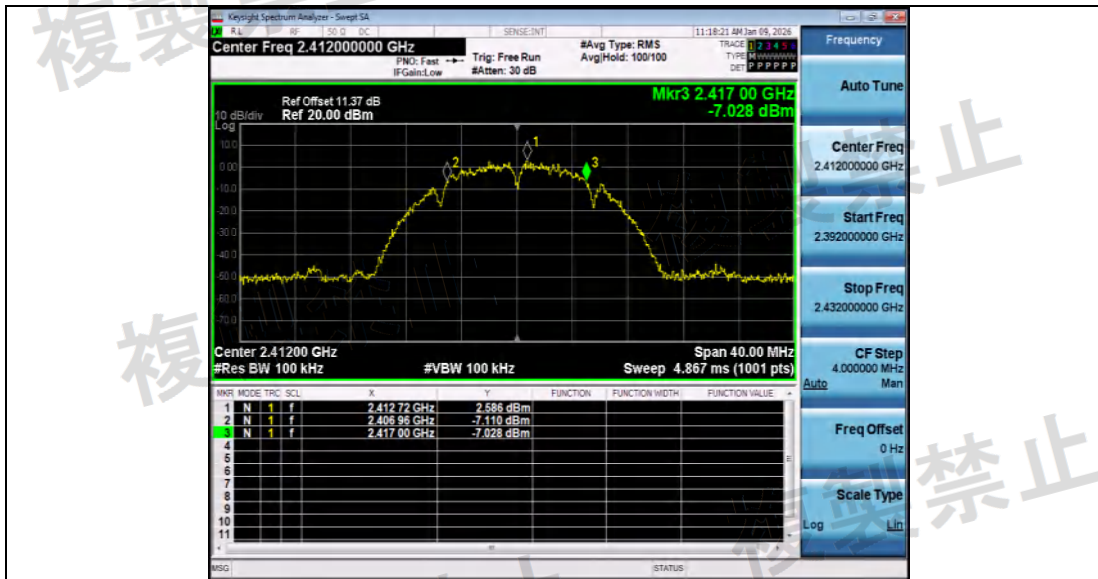

NTNV_11B Ant1 2412

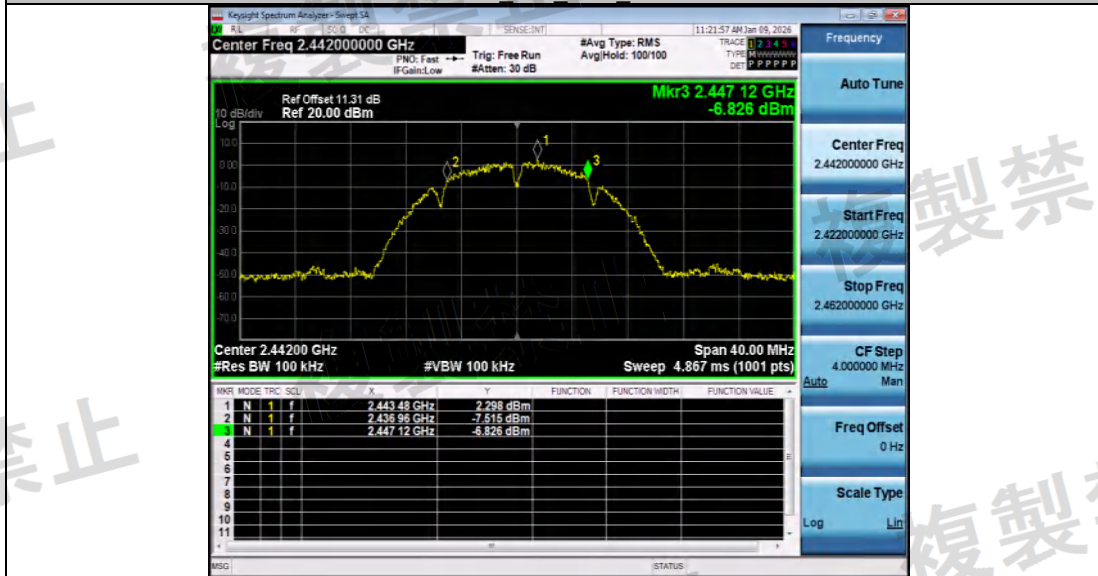

NTNV_11B Ant1 2442

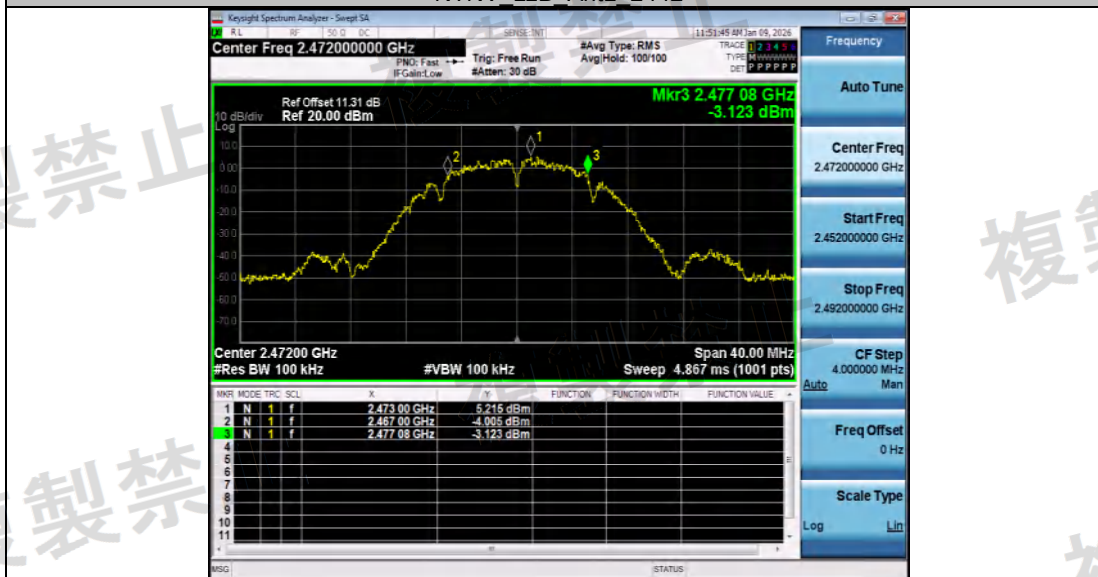


NTNV_11B Ant1 2472



NTNV 11G Ant1 2412



NTNV 11G Ant1 2442

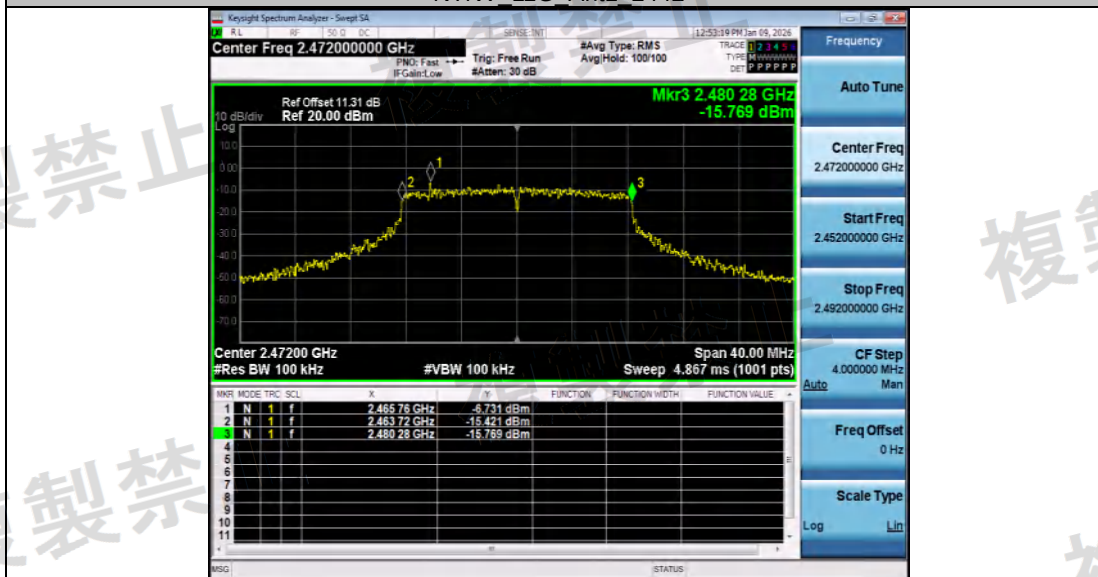


NTNV 11G Ant1 2472



NTNV 11N20SISO_Ant1_2412




NTNV 11N20SISO_Ant1_2442

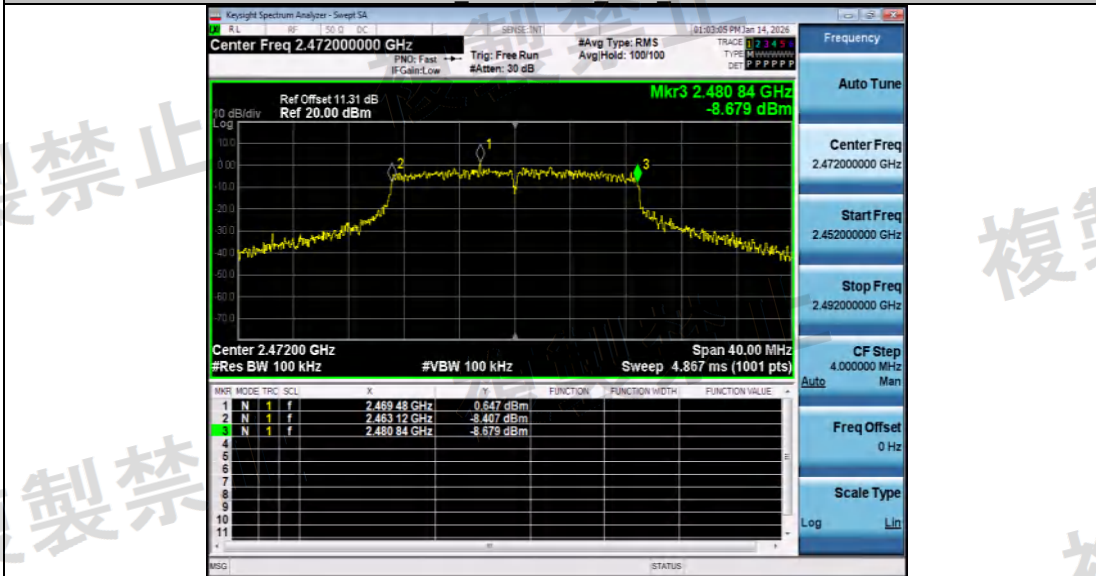


NTNV 11N20SISO_Ant1_2472



NTNV 11N40SISO_Ant1_2422

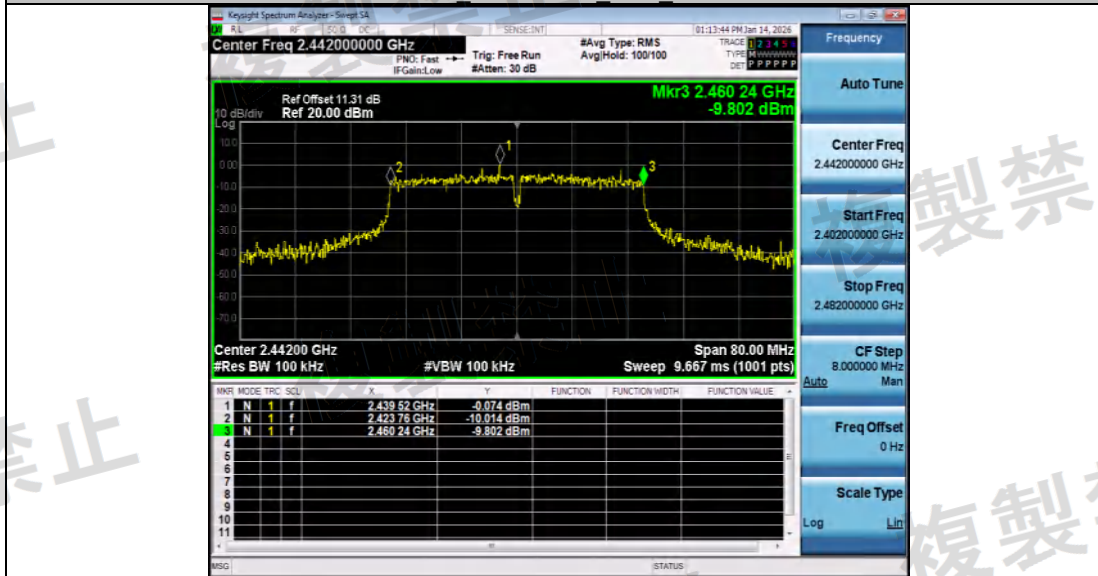


NTNV 11N40SISO_Ant1_2442

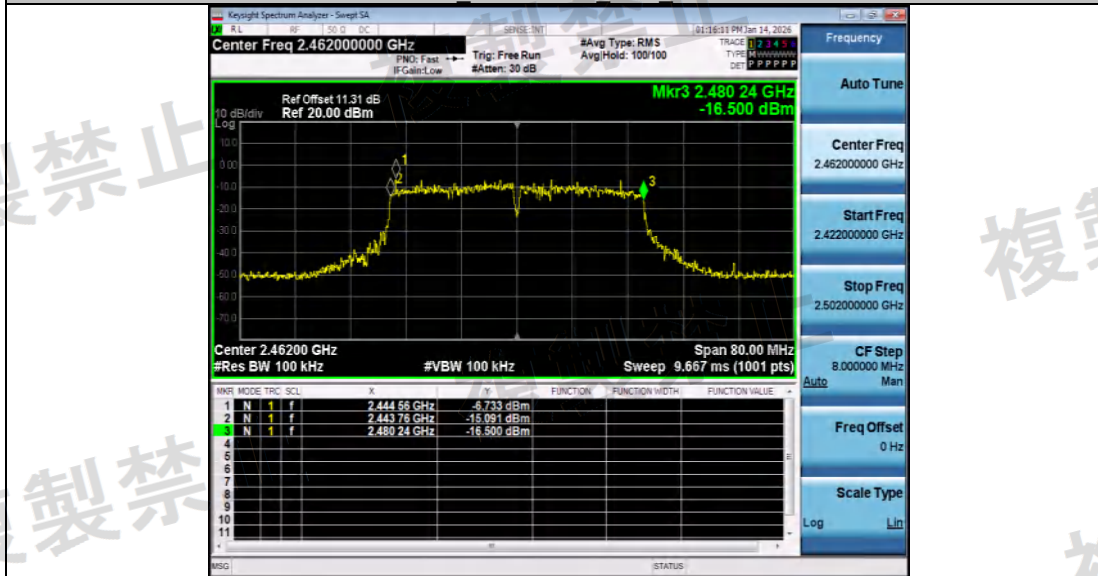

NTNV 11N40SISO_Ant1_2462




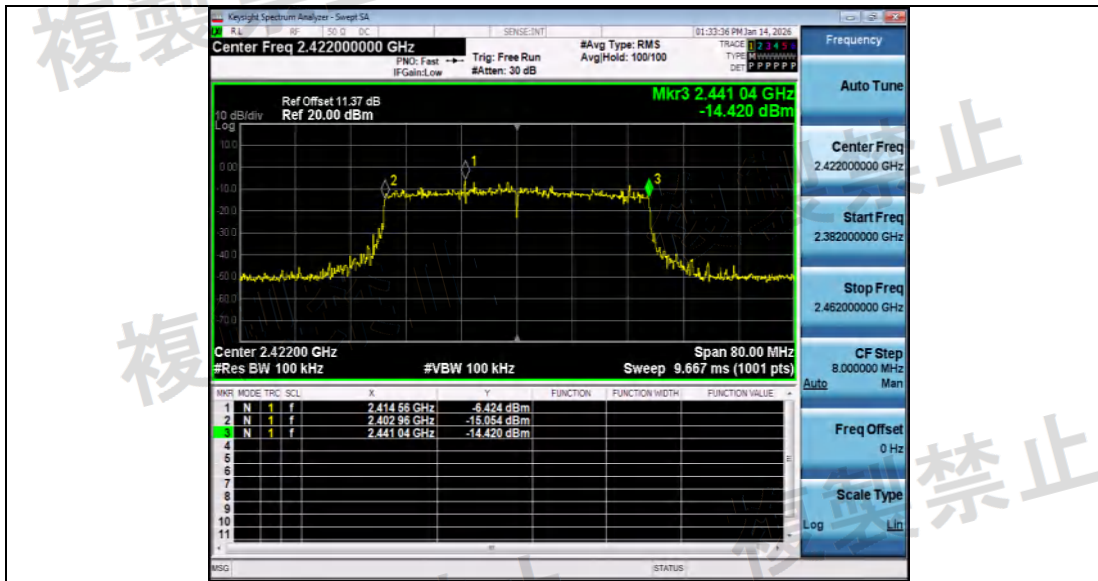

NTV 11AX40SISO Ant1 2422



NTV 11AX40SISO Ant1 2442

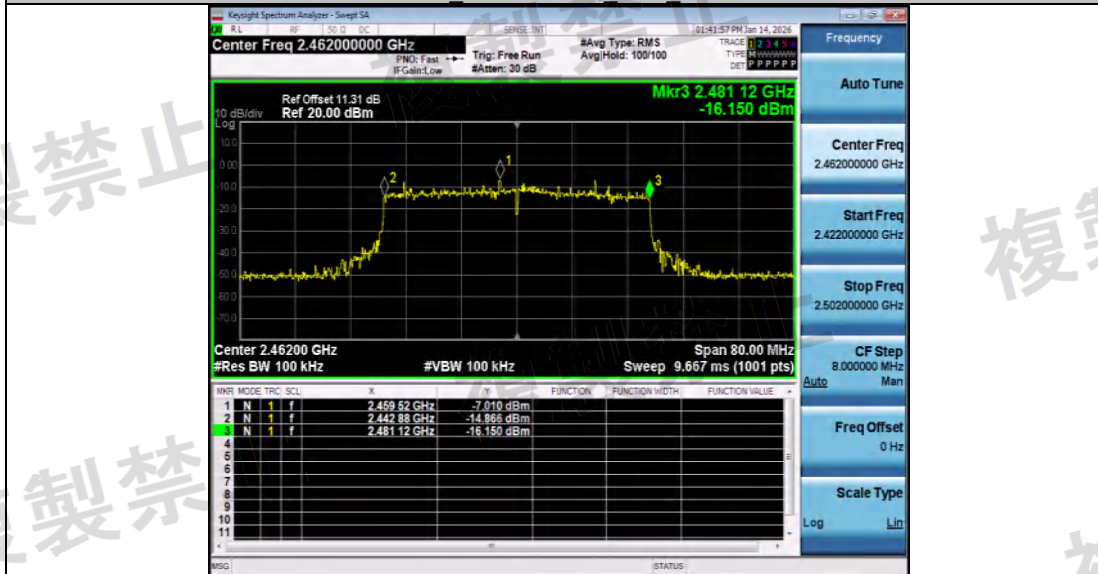

NTV 11AX40SISO Ant1 2462

Appendix B: Antenna power, antenna power tolerance and E.I.R.P.

Test Result

Antenna Power							
Test Condition	Test Mode	Antenna	Freq(M Hz)	Result(dBm /MHz)	Result(mW/ MHz)	Limit(mW/ MHz)	Verdict
NTNV	11B	Ant1	2412	6.73	4.7098	≤10	PASS
			2442	5.74	3.7497	≤10	PASS
			2472	9.25	8.4140	≤10	PASS
	11G	Ant1	2412	5.81	3.8107	≤10	PASS
			2442	6.98	4.9888	≤10	PASS
			2472	9.90	9.7724	≤10	PASS
	11N20SI SO	Ant1	2412	1.81	1.5171	≤10	PASS
			2442	9.36	8.6298	≤10	PASS
			2472	9.30	8.5114	≤10	PASS
	11N40SI SO	Ant1	2422	0.55	1.1350	≤5	PASS
			2442	6.35	4.3152	≤5	PASS
			2462	1.80	1.5136	≤5	PASS
	11AX20S ISO	Ant1	2412	6.97	4.9774	≤10	PASS
			2442	9.35	8.6099	≤10	PASS
			2472	9.27	8.4528	≤10	PASS
	11AX40S ISO	Ant1	2422	0.12	1.0280	≤5	PASS
			2442	3.29	2.1330	≤5	PASS
			2462	3.70	2.3442	≤5	PASS

Tolerance								
Test Condition	Test Mode	Antenna	Freq(MHz)	Power (mW/M Hz)	RatedPower (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	11B	Ant1	2412	4.7098	10	-52.90	+20	PASS
			2442	3.7497	10	-62.50	+20	PASS
			2472	8.4140	10	-15.86	+20	PASS
	11G	Ant1	2412	3.8107	10	-61.89	+20	PASS
			2442	4.9888	10	-50.11	+20	PASS
			2472	9.7724	10	-2.28	+20	PASS
	11N20SI SO	Ant1	2412	1.5171	10	-84.83	+20	PASS
			2442	8.6298	10	-13.70	+20	PASS
			2472	8.5114	10	-14.89	+20	PASS
	11N40SI SO	Ant1	2422	1.1350	5	-77.30	+20	PASS
			2442	4.3152	5	-13.70	+20	PASS
			2462	1.5136	5	-69.73	+20	PASS
	11AX20S ISO	Ant1	2412	4.9774	10	-50.23	+20	PASS
			2442	8.6099	10	-13.90	+20	PASS
			2472	8.4528	10	-15.47	+20	PASS
	11AX40S ISO	Ant1	2422	1.0280	5	-79.44	+20	PASS
			2442	2.1330	5	-57.34	+20	PASS
			2462	2.3442	5	-53.12	+20	PASS

Test Result PSD

Tel: 400 888 2955 & 0769-22891258

Fax: 0769-22891235

Email: service.vip@worldtest.cn

Web: www.worldtest.cn&www.worldtest.com.cn

Test Condition	Test Mode	Antenna	EIRP						
			Freq(M Hz)	Result(dBm mW/MHz)	G(dBi)	Y(dB)	EIRP(dBm mW/MHz)	Limit(dBm mW/MHz)	Verdict
NTNV	11B	Ant1	2412	6.73	1.5	0.062	8.292	≤12.14	PASS
			2442	5.74	1.5	0.062	7.302	≤12.14	PASS
			2472	9.25	1.5	0.062	10.812	≤12.14	PASS
	11G	Ant1	2412	5.81	1.5	0.062	7.372	≤12.14	PASS
			2442	6.98	1.5	0.062	8.542	≤12.14	PASS
			2472	9.90	1.5	0.062	11.462	≤12.14	PASS
	11N20SI SO	Ant1	2412	1.81	1.5	0.067	3.377	≤12.14	PASS
			2442	9.36	1.5	0.067	10.927	≤12.14	PASS
			2472	9.30	1.5	0.067	10.867	≤12.14	PASS
	11N40SI SO	Ant1	2422	0.55	1.5	0.067	2.117	≤9.13	PASS
			2442	6.35	1.5	0.067	7.917	≤9.13	PASS
			2462	1.80	1.5	0.067	3.367	≤9.13	PASS
	11AX20S ISO	Ant1	2412	6.97	1.5	0.062	8.532	≤12.14	PASS
			2442	9.35	1.5	0.062	10.912	≤12.14	PASS
			2472	9.27	1.5	0.062	10.832	≤12.14	PASS
	11AX40S ISO	Ant1	2422	0.12	1.5	0.062	1.682	≤9.13	PASS
			2442	3.29	1.5	0.062	4.852	≤9.13	PASS
			2462	3.70	1.5	0.062	5.262	≤9.13	PASS

Remark:

1.EIRP=D+G+10 log (1/x)

D:antenna power ; G:antenna gain x: duty Cycle Y=10 log (1/x)


2.When EIRP is greater than 12.14dBm, Evaluation is needed for Transmission Antenna Gain (EIRP Antenna Power) Measurement and Transmission Radiation Angle Width (3dB Beamwidth) Measurement




NTNV 11B_Ant1 2412





NTNV 11B_Ant1 2412

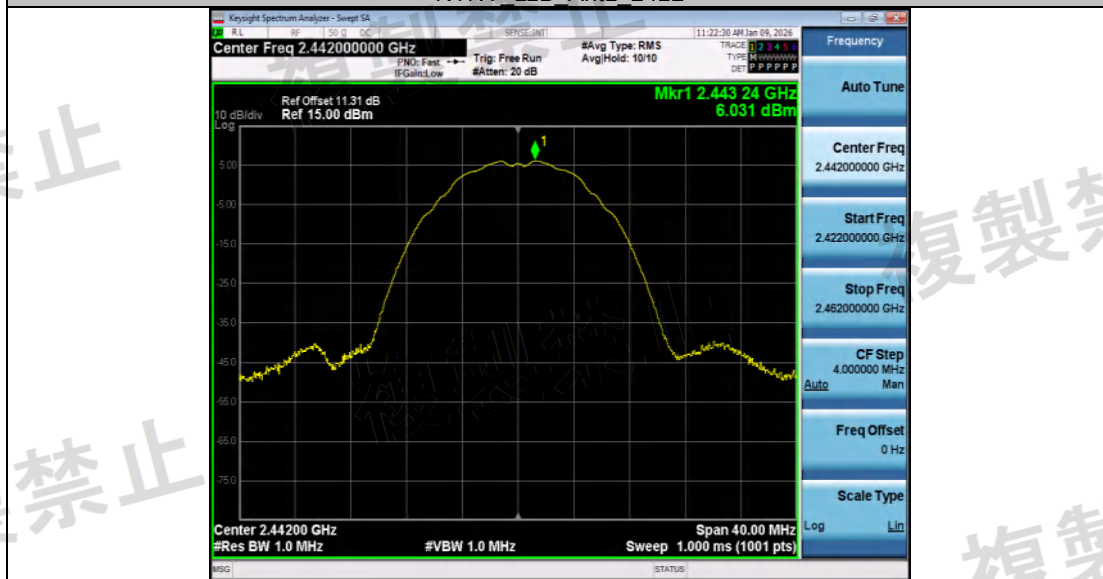



NTNV 11B_Ant1 2442

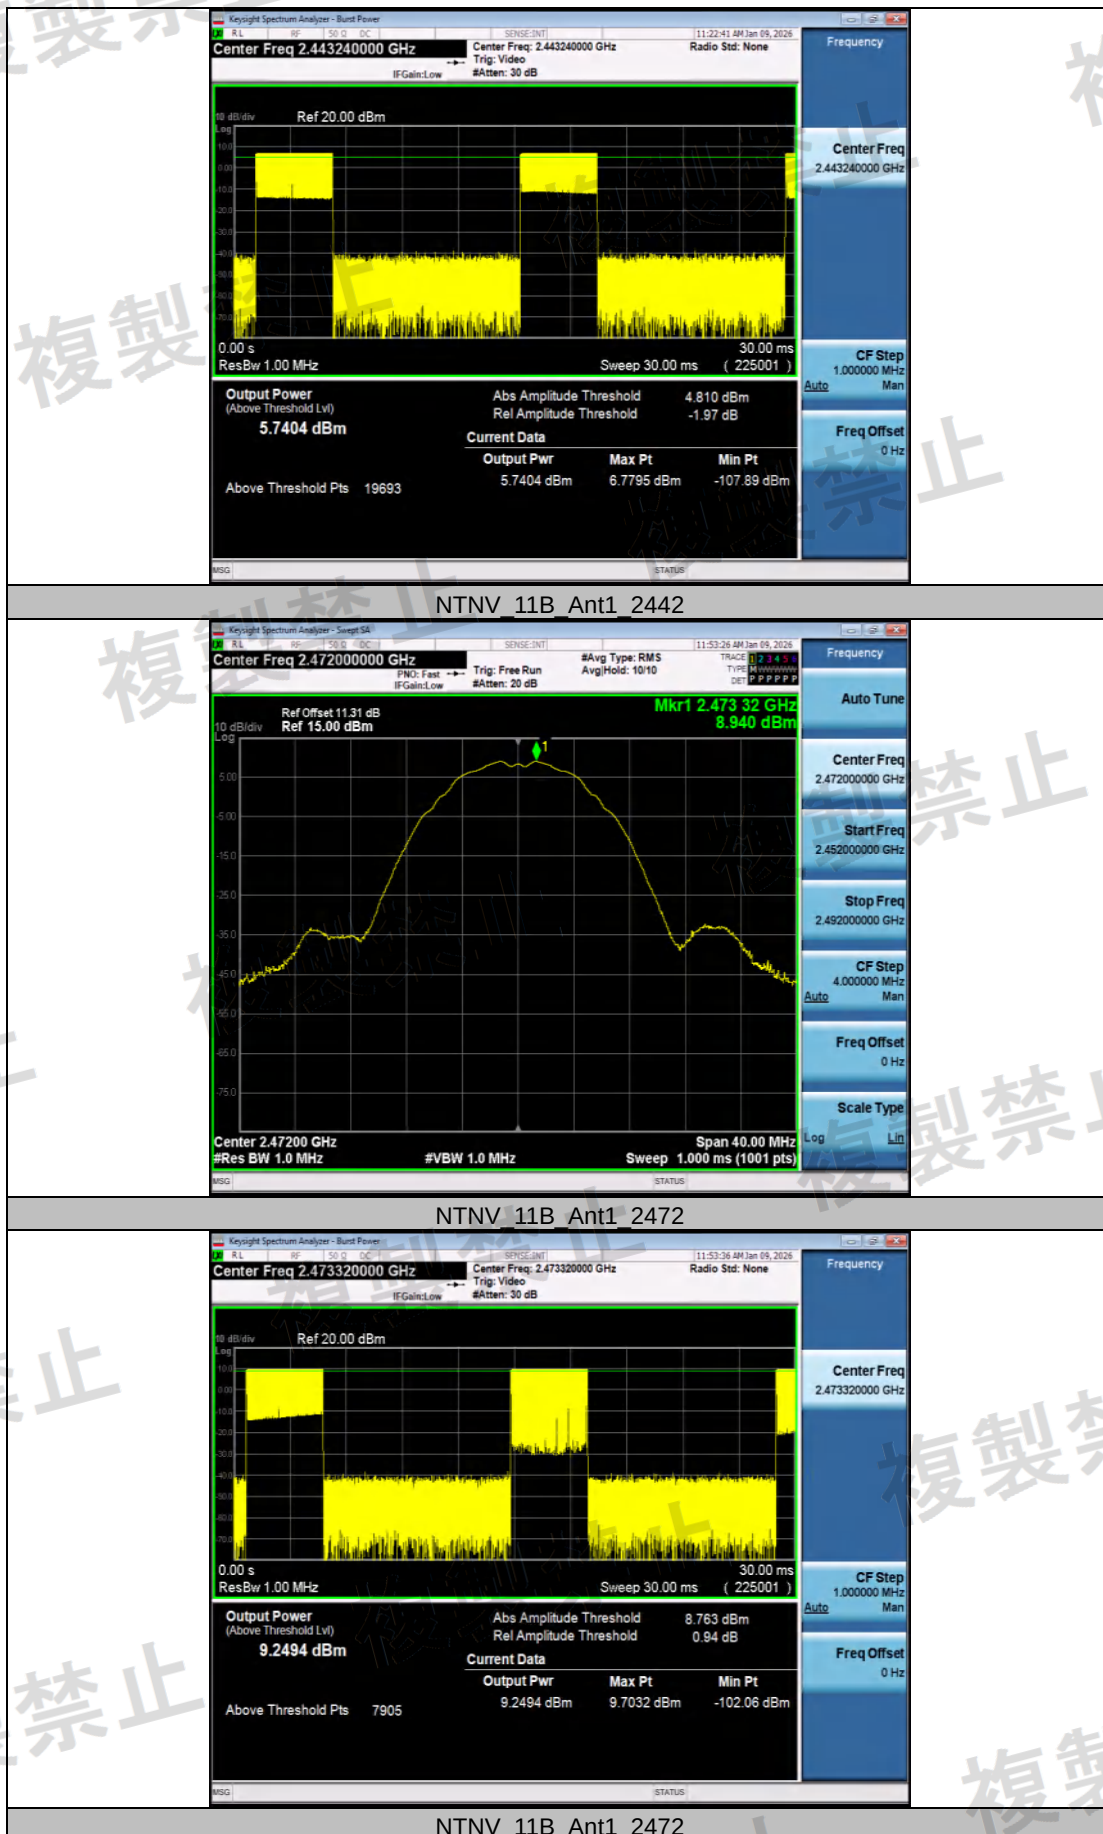


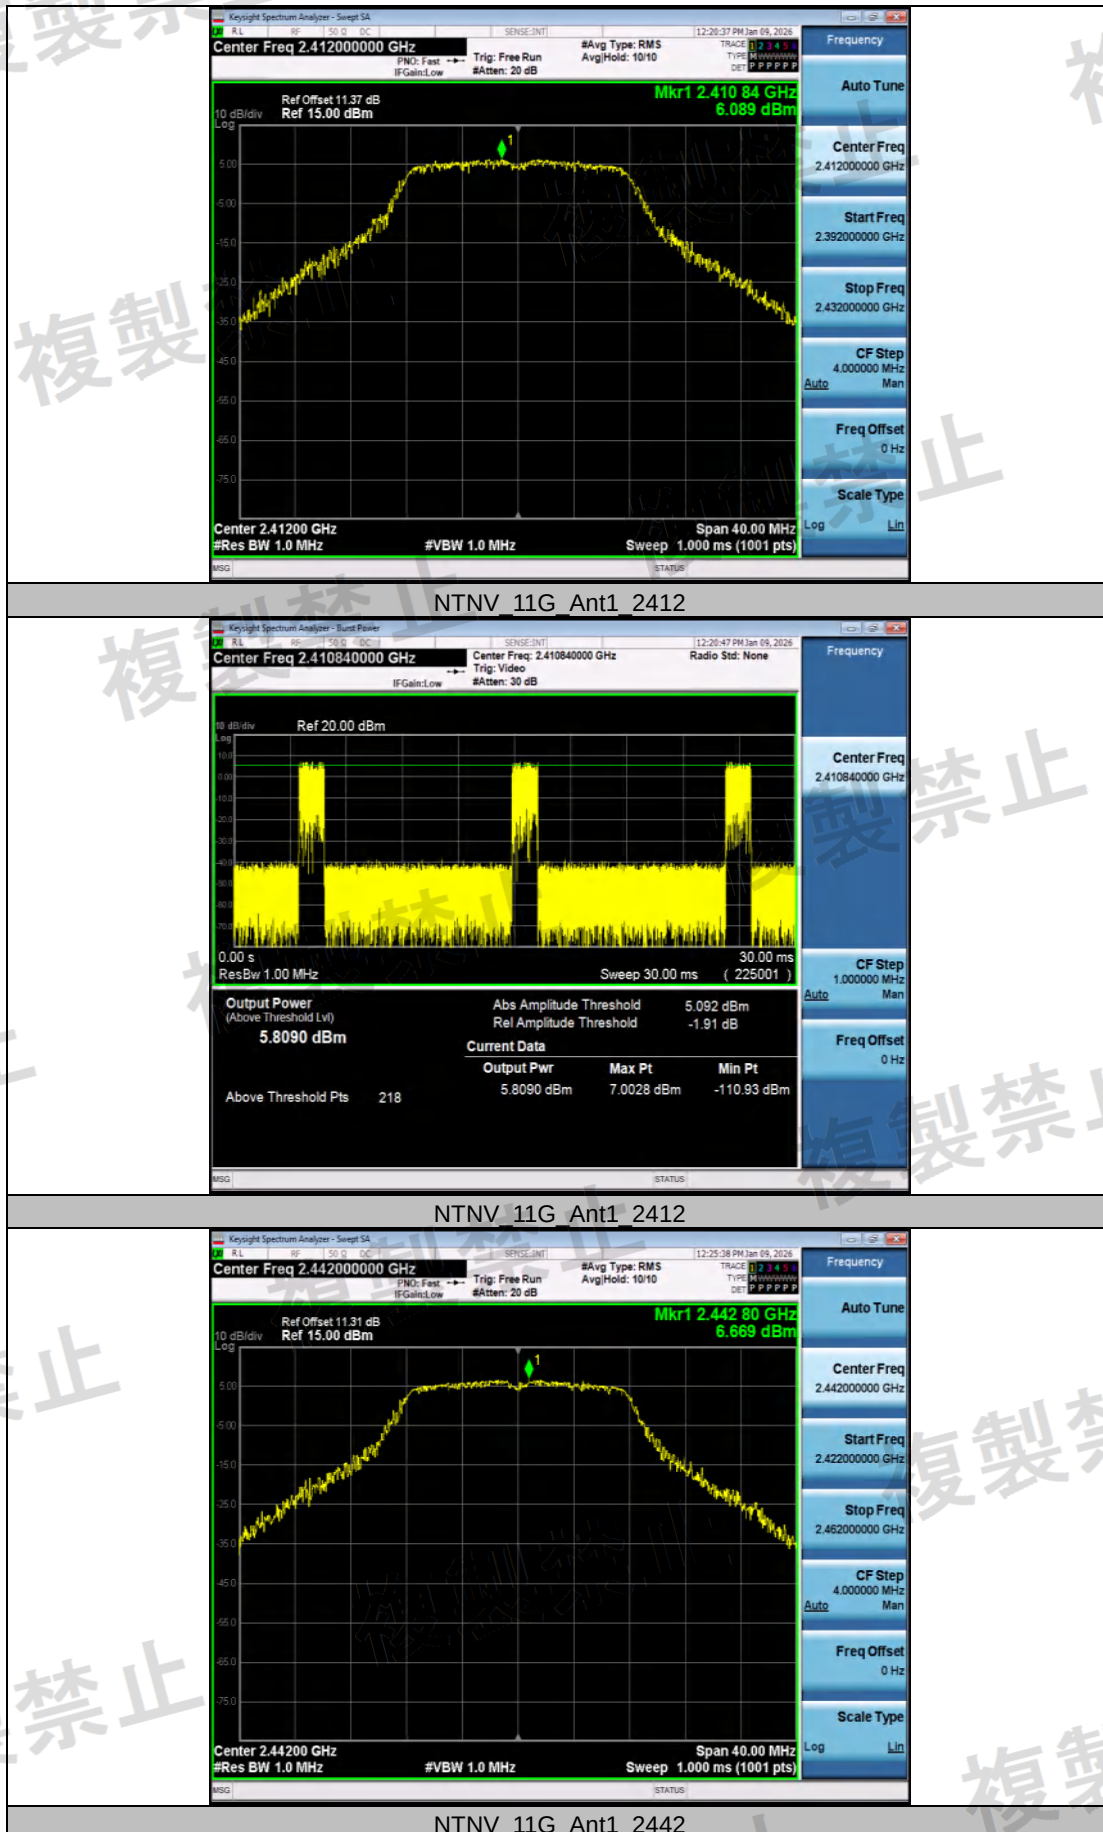


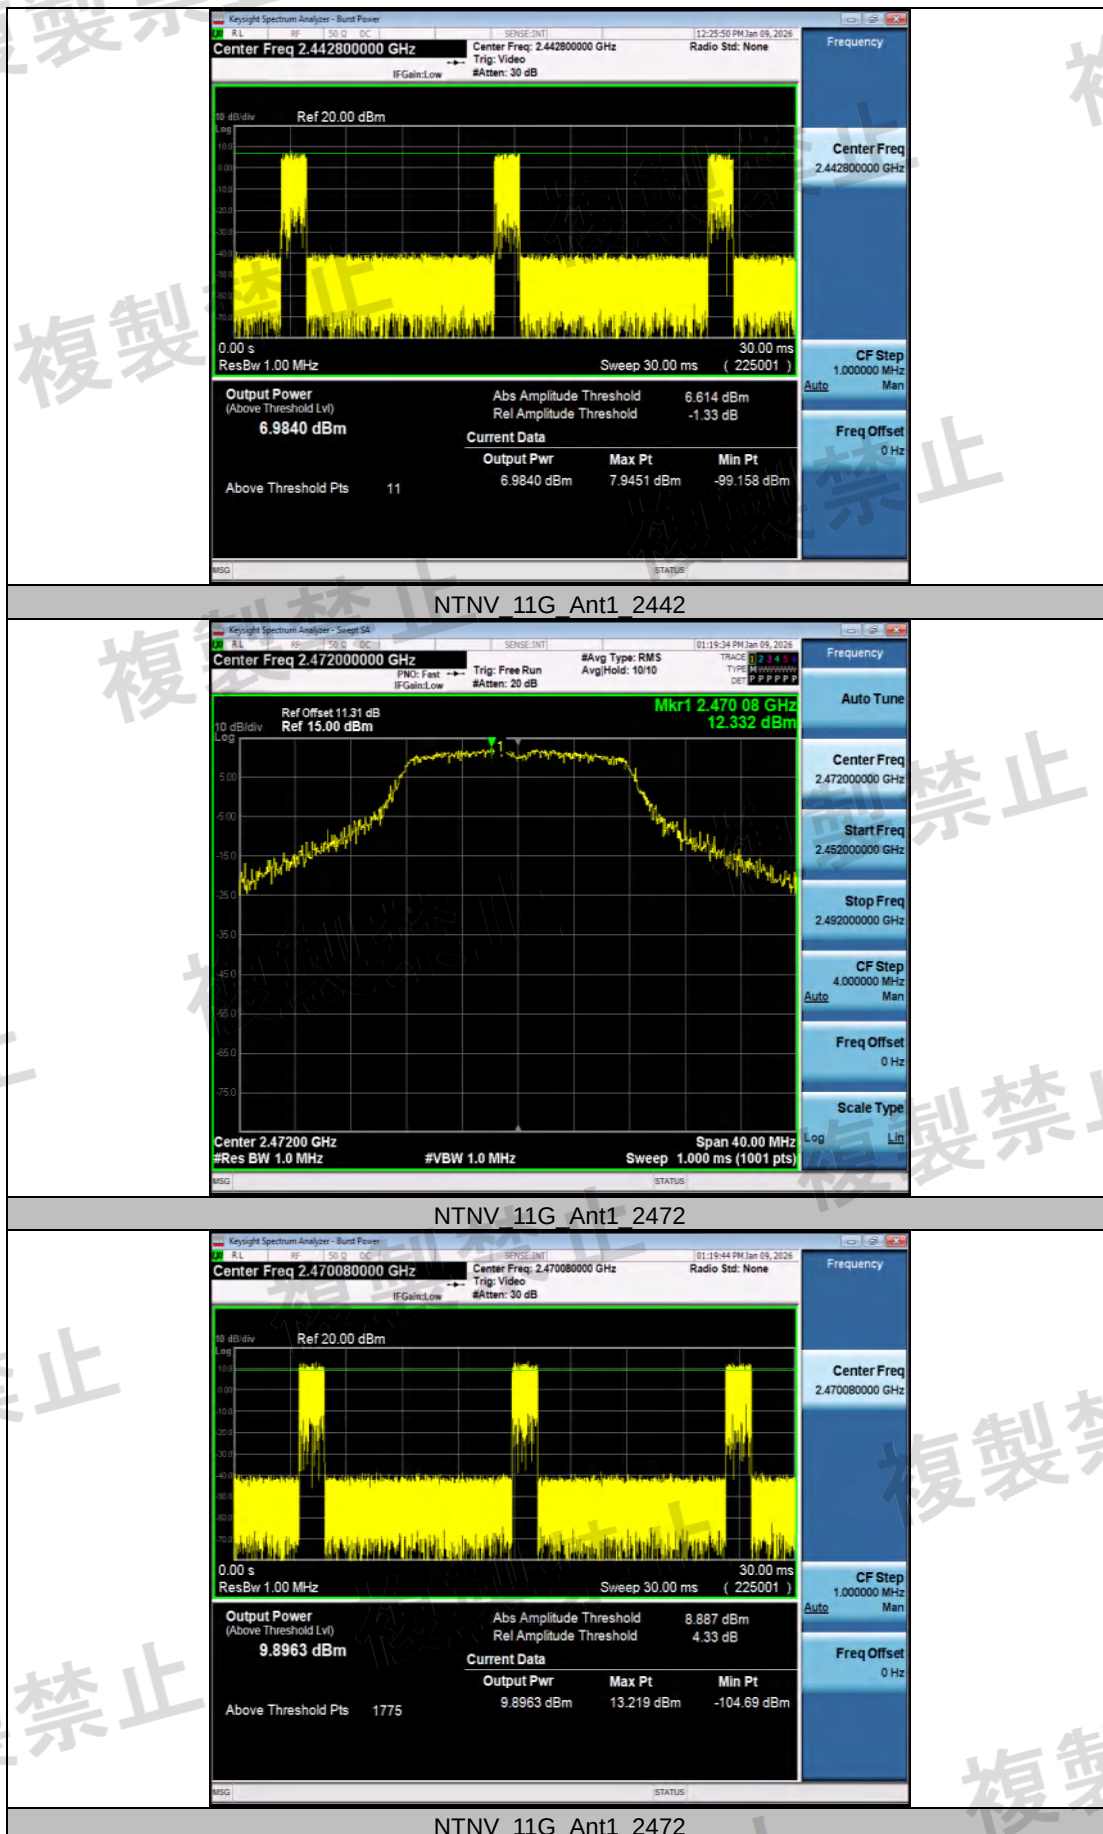


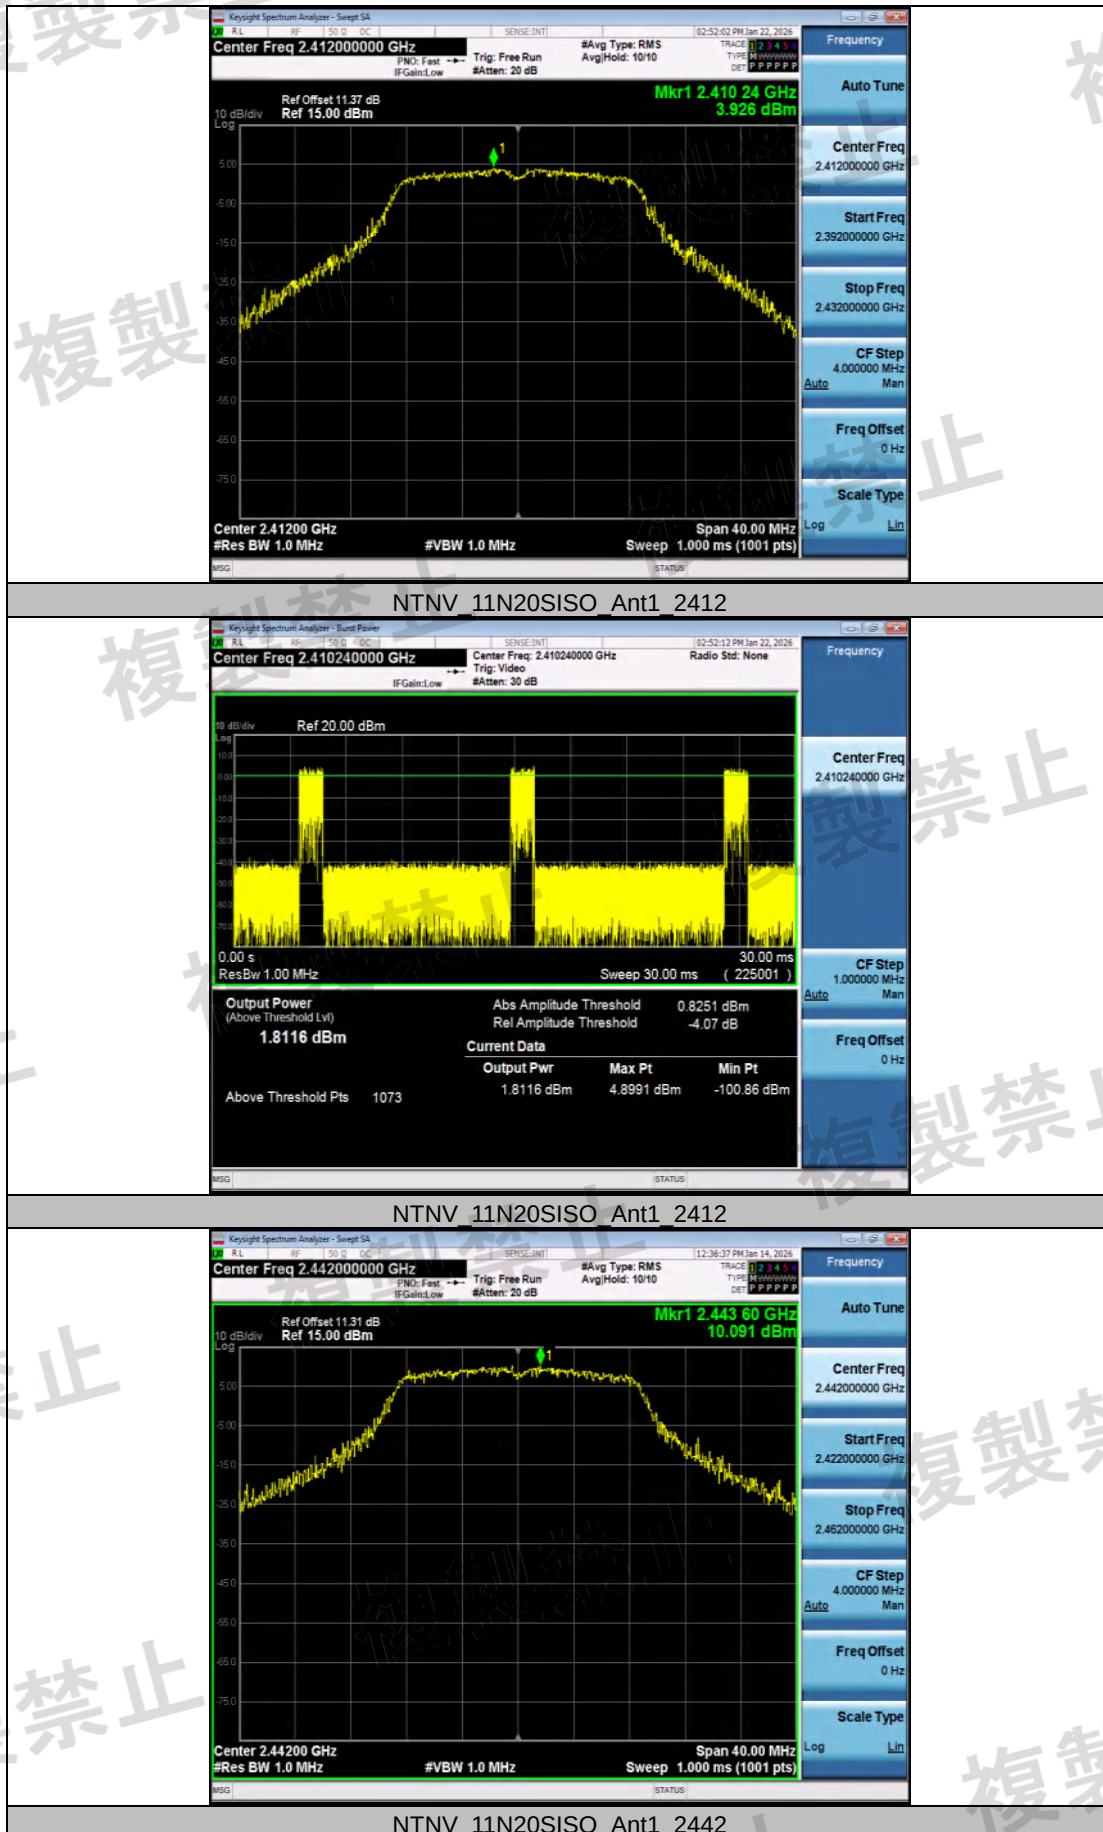


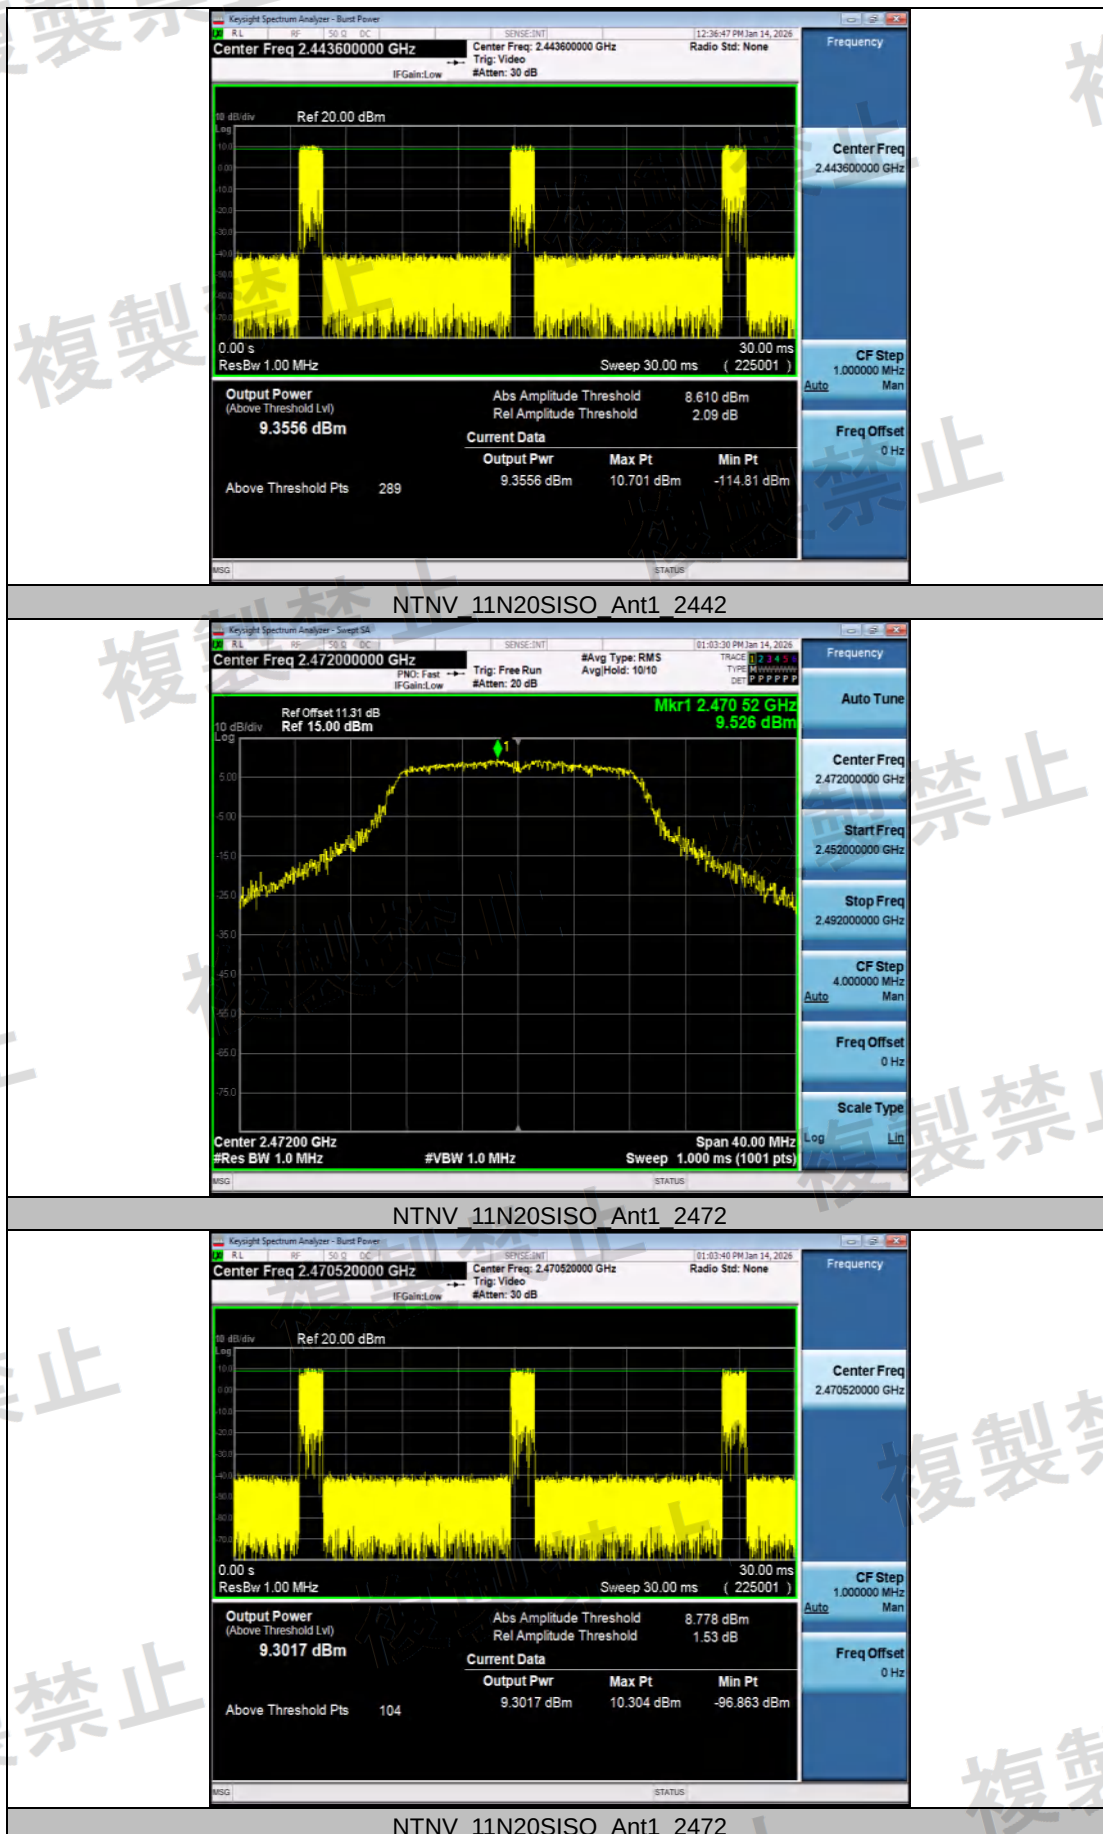

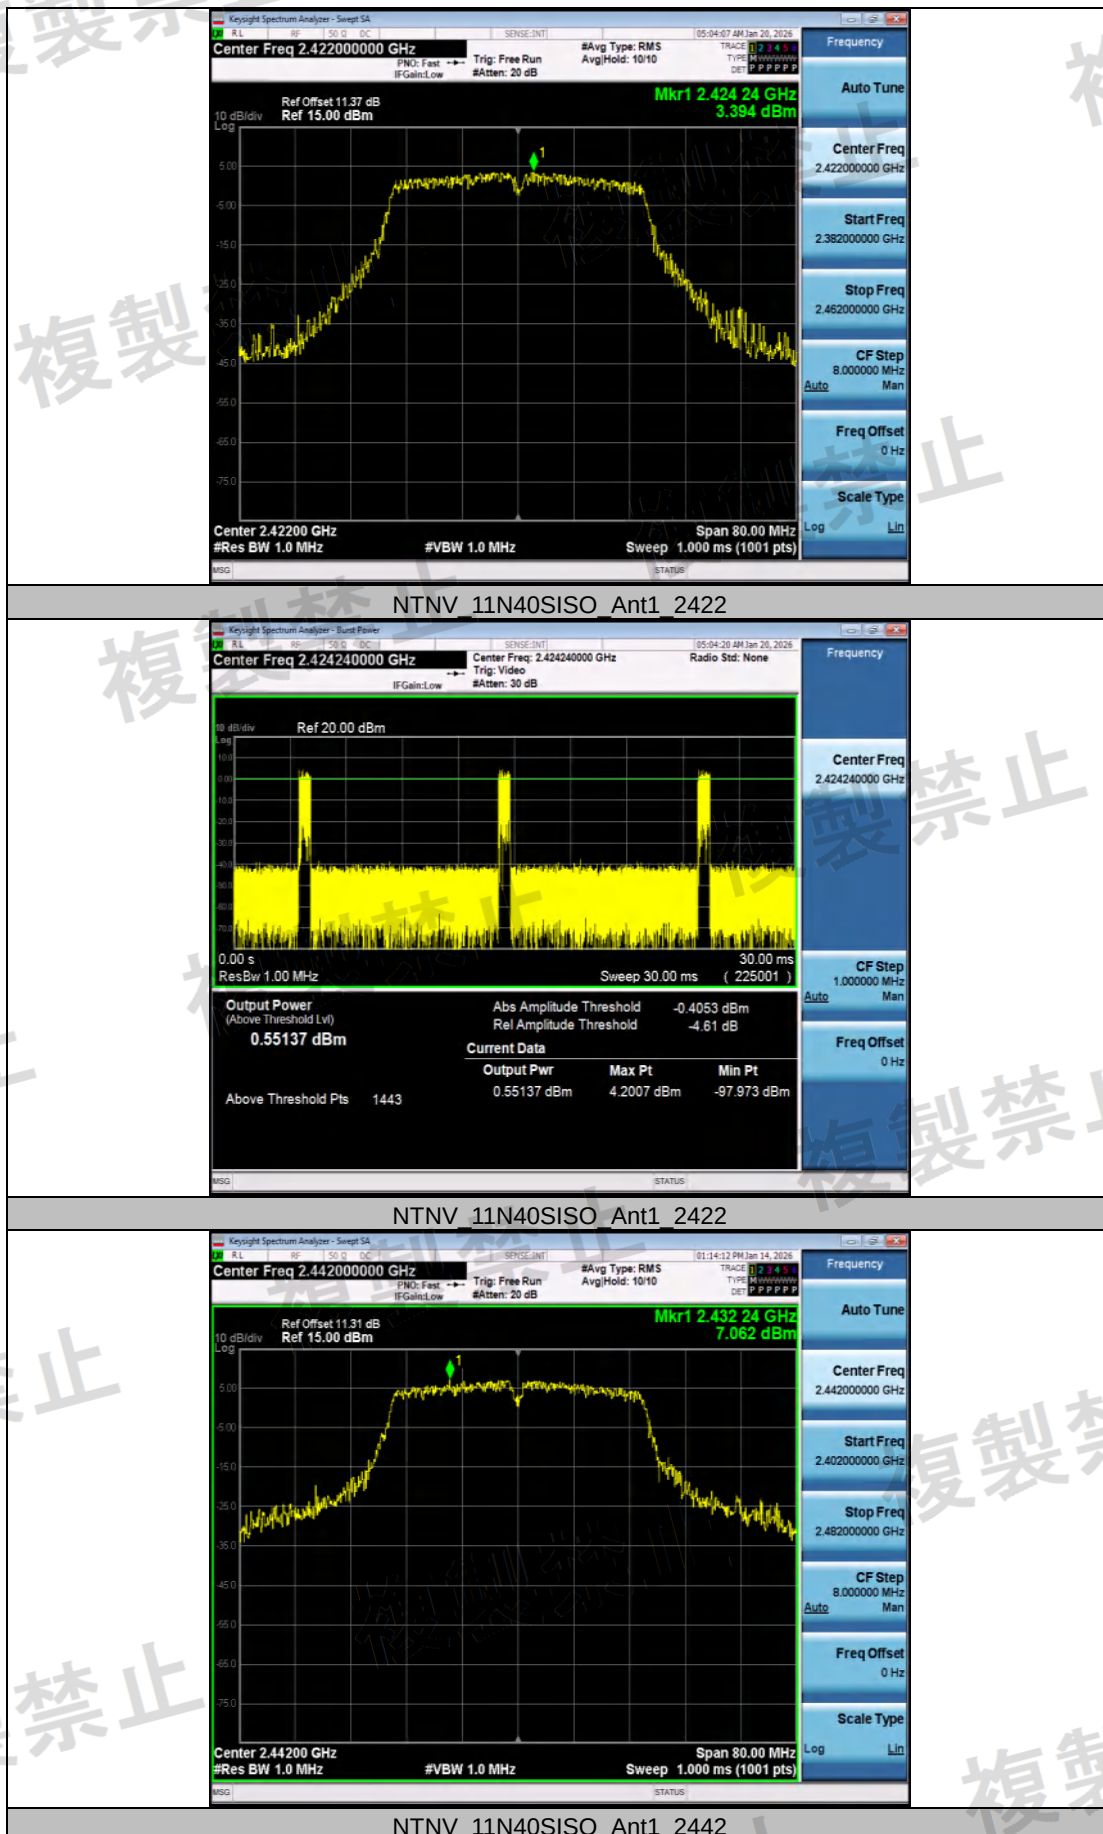

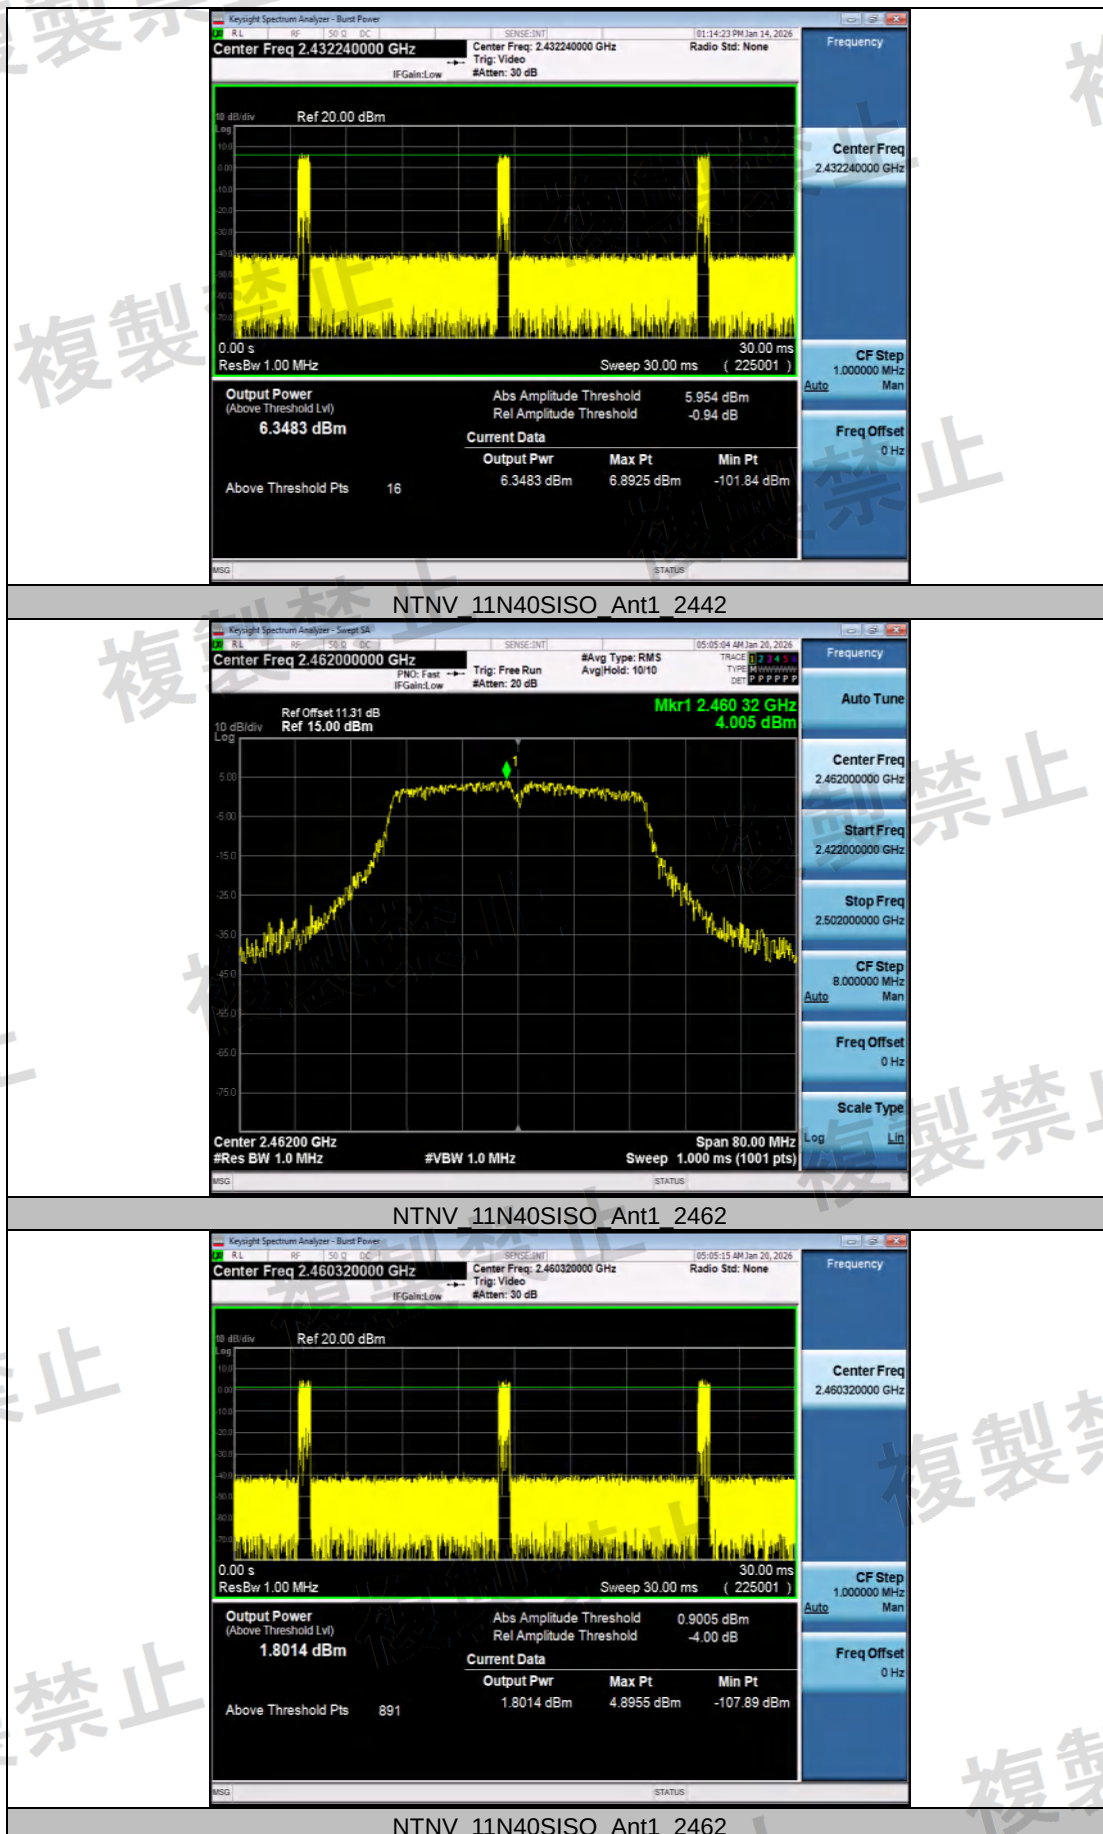

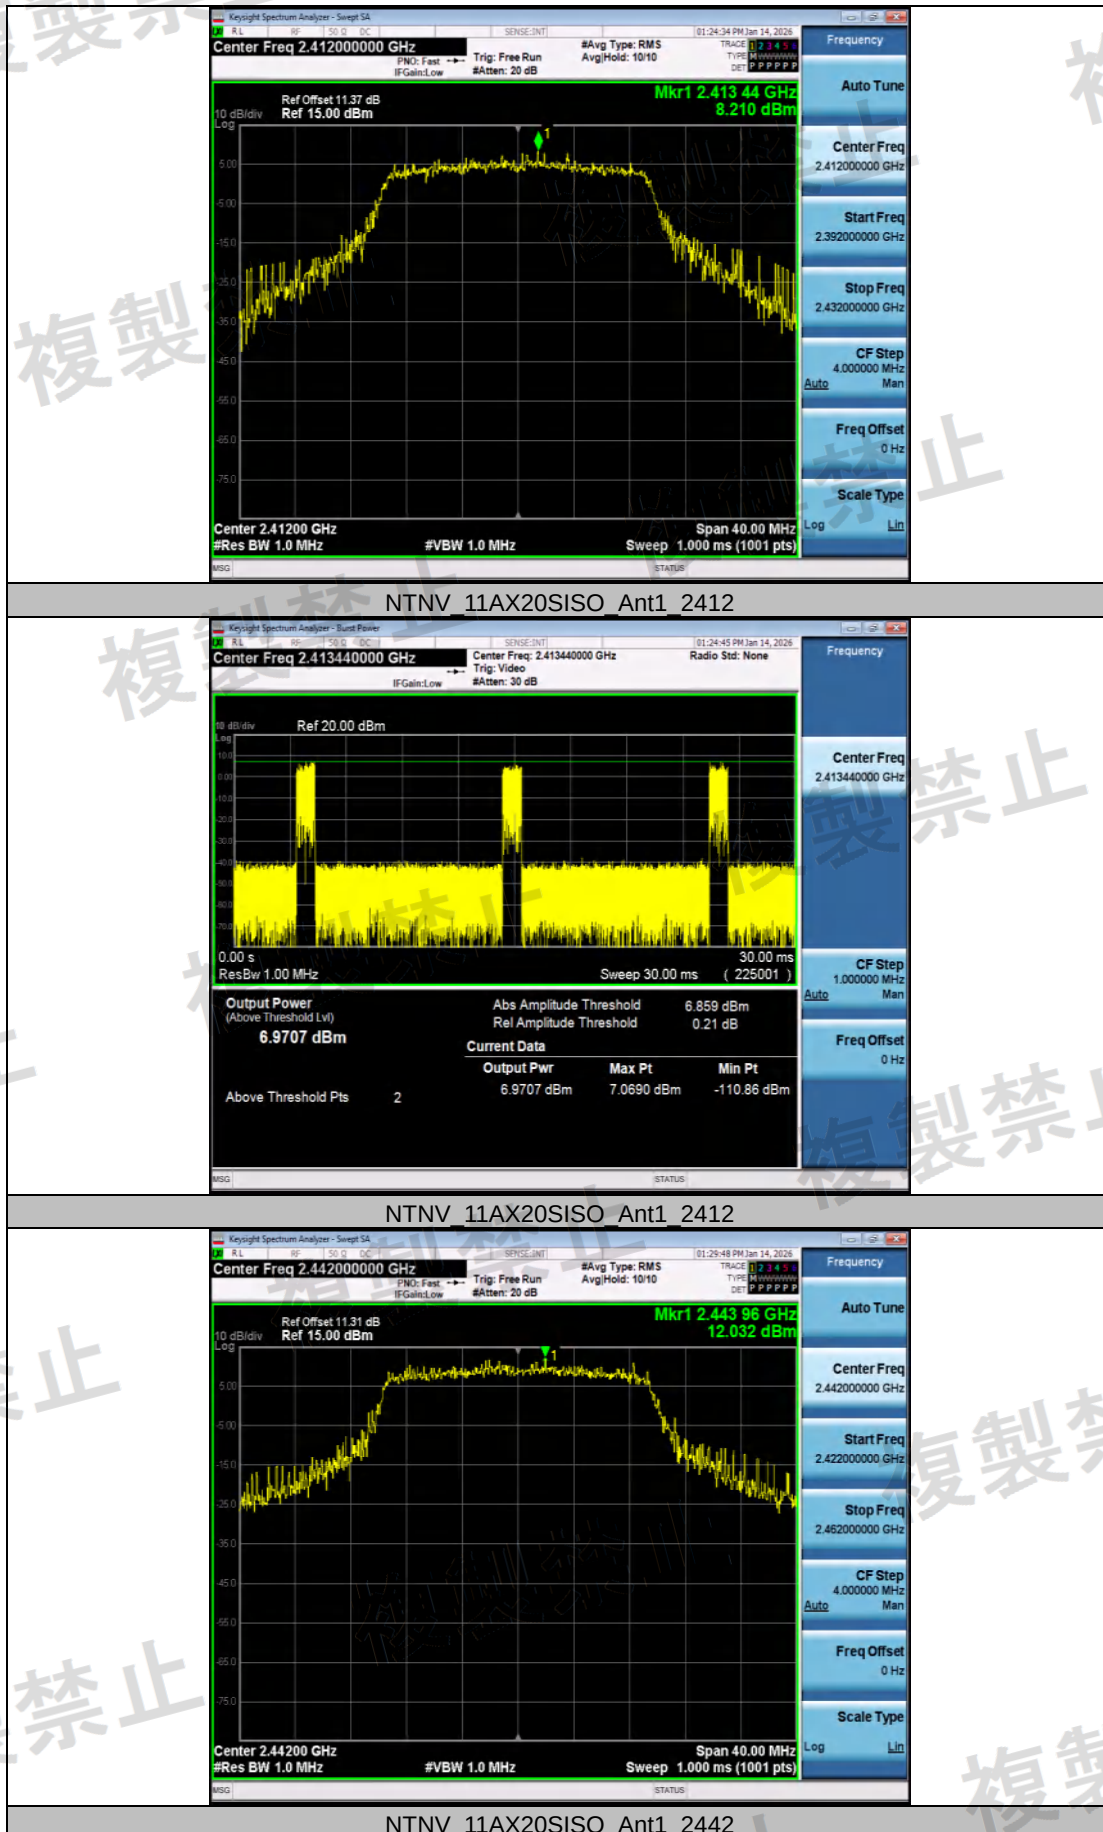


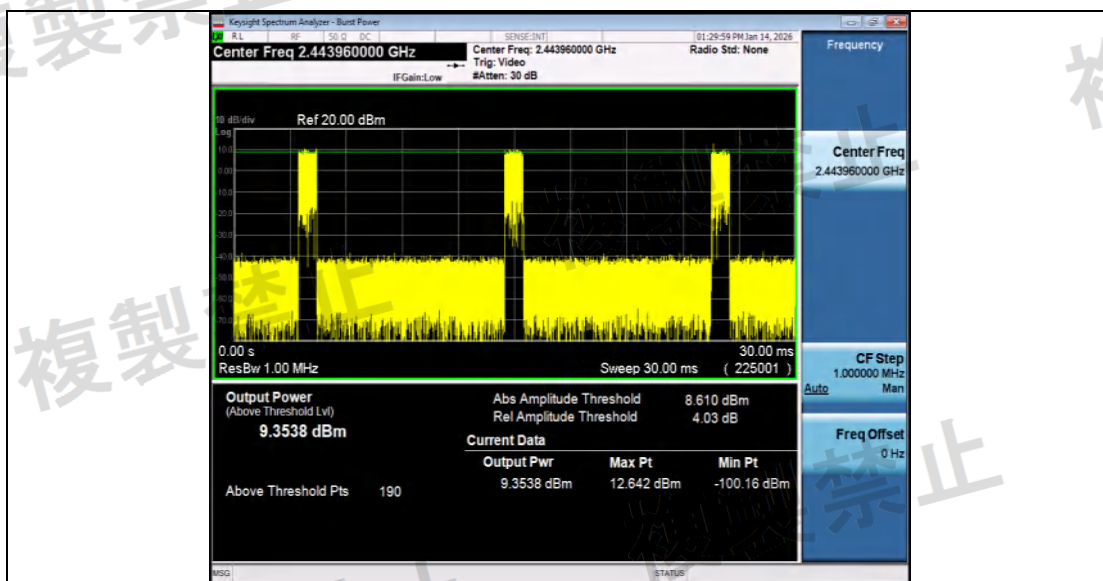


NTNV 11AX20SISO_Ant1_2442




NTNV 11AX20SISO_Ant1_2472

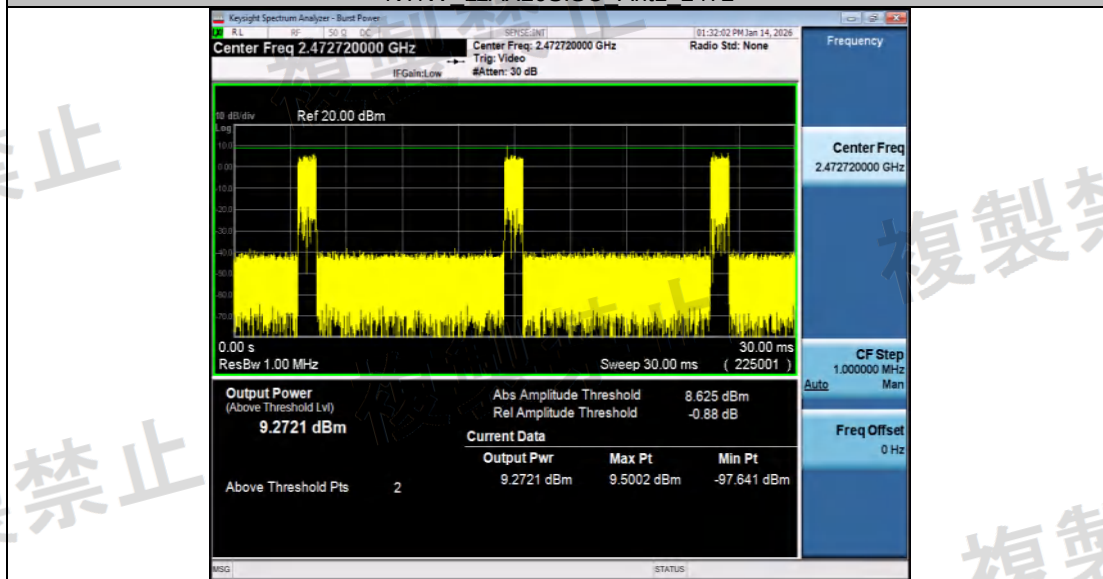


NTNV 11AX20SISO_Ant1_2472

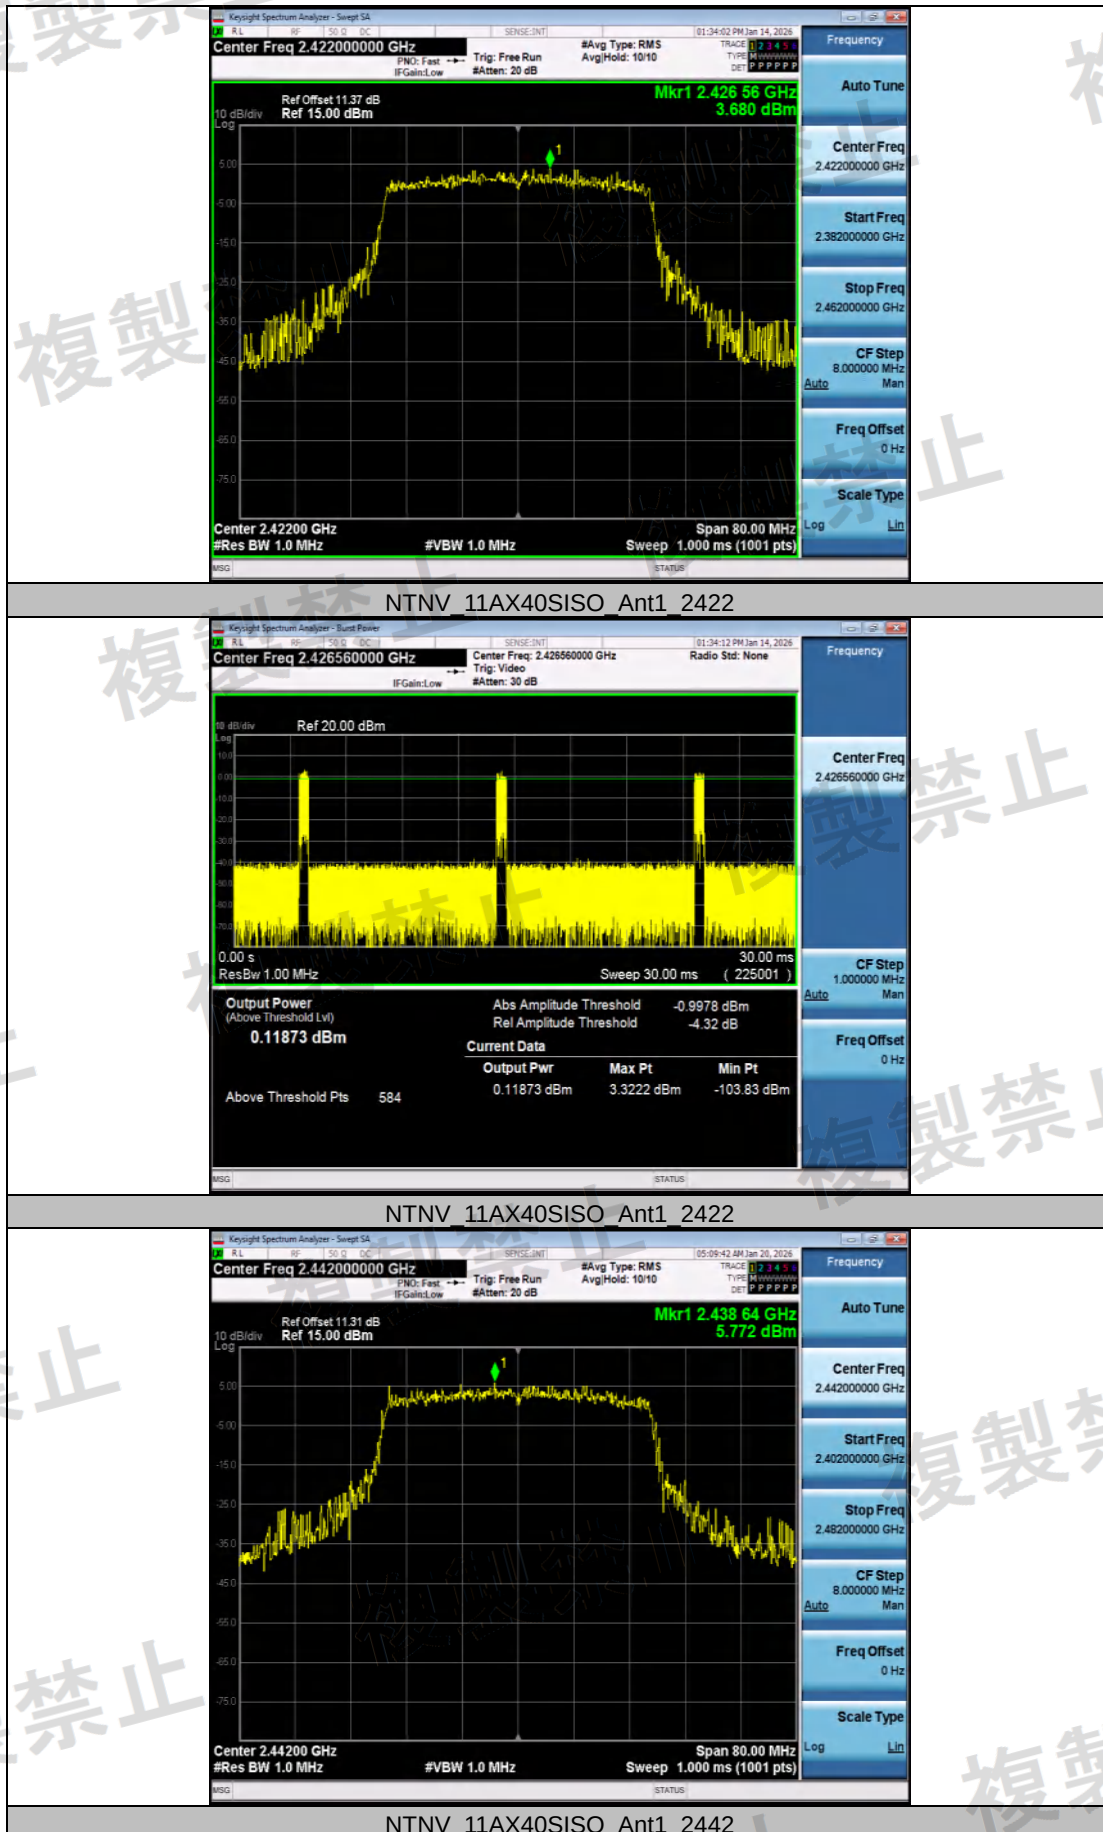


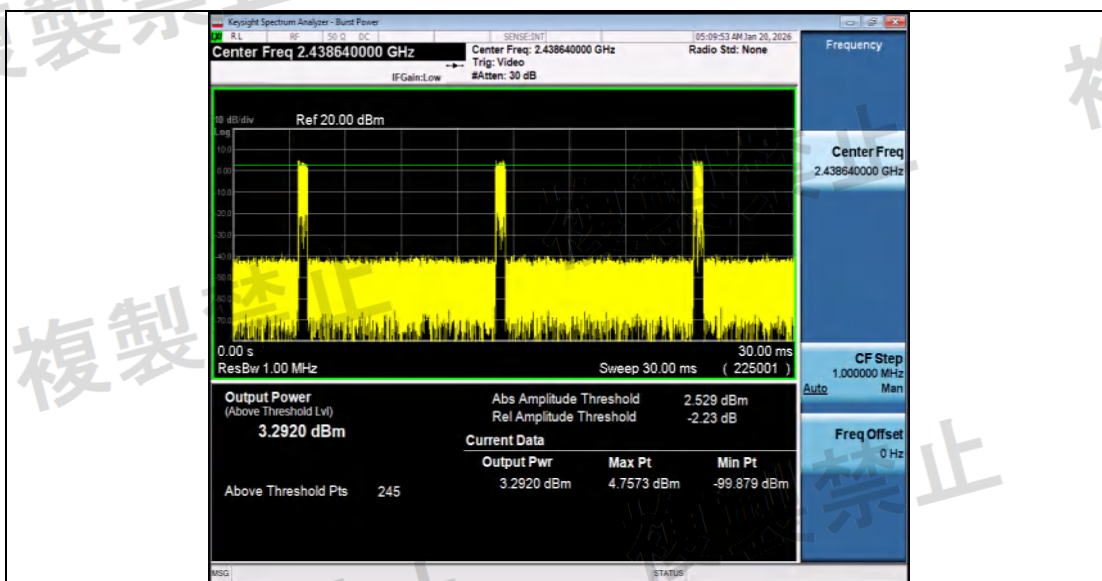

NTNV 11AX40SISO_Ant1_2442

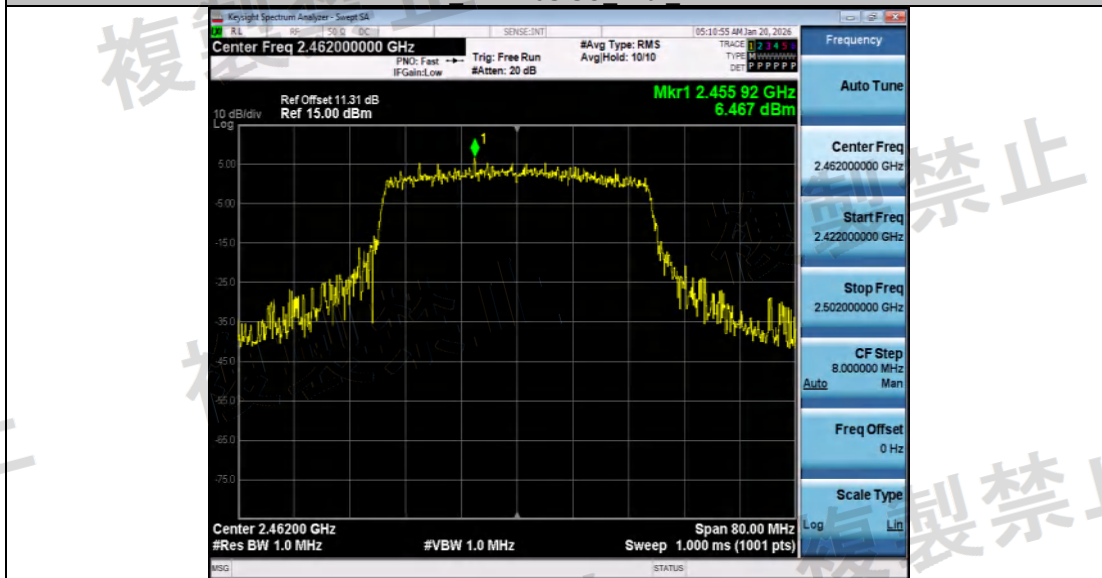

NTNV 11AX40SISO_Ant1_2462

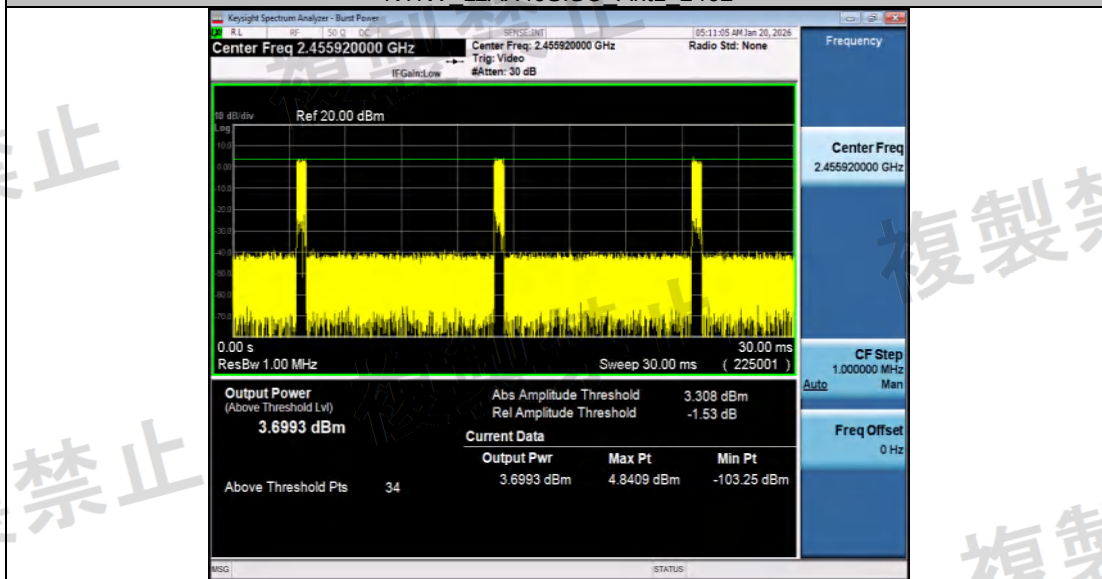



NTNV 11AX40SISO_Ant1_2462

Appendix C: Occupied Bandwidth


Test Result

TestCondition	TestMode	Antenna	Freq(MHz)	Result [MHz]	Limit [MHz]	Verdict
NTNV	11B	Ant1	2412	13.115	≤26	PASS
			2442	13.145	≤26	PASS
			2472	13.271	≤26	PASS
	11G	Ant1	2412	16.699	≤26	PASS
			2442	16.707	≤26	PASS
			2472	16.707	≤26	PASS
	11N20SI SO	Ant1	2412	17.845	≤26	PASS
			2442	17.945	≤26	PASS
			2472	17.989	≤26	PASS
	11N40SI SO	Ant1	2422	36.225	26-40	PASS
			2442	36.162	26-40	PASS
			2462	36.207	26-40	PASS
	11AX20S ISO	Ant1	2412	18.969	≤26	PASS
			2442	18.969	≤26	PASS
			2472	18.996	≤26	PASS
	11AX40S ISO	Ant1	2422	37.679	26-40	PASS
			2442	37.739	26-40	PASS
			2462	37.612	26-40	PASS

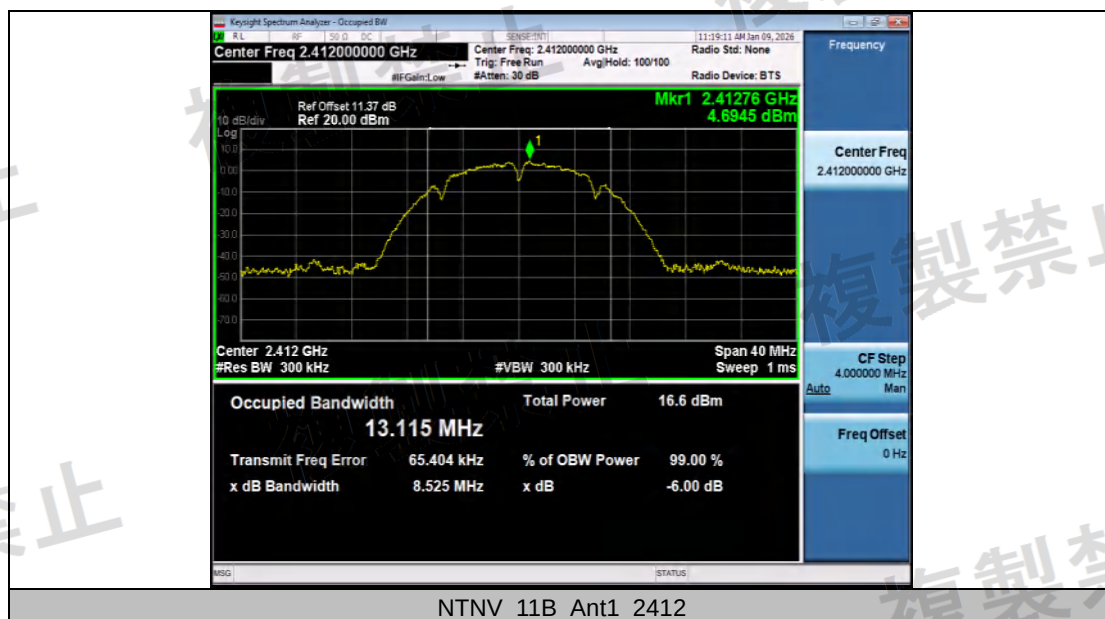


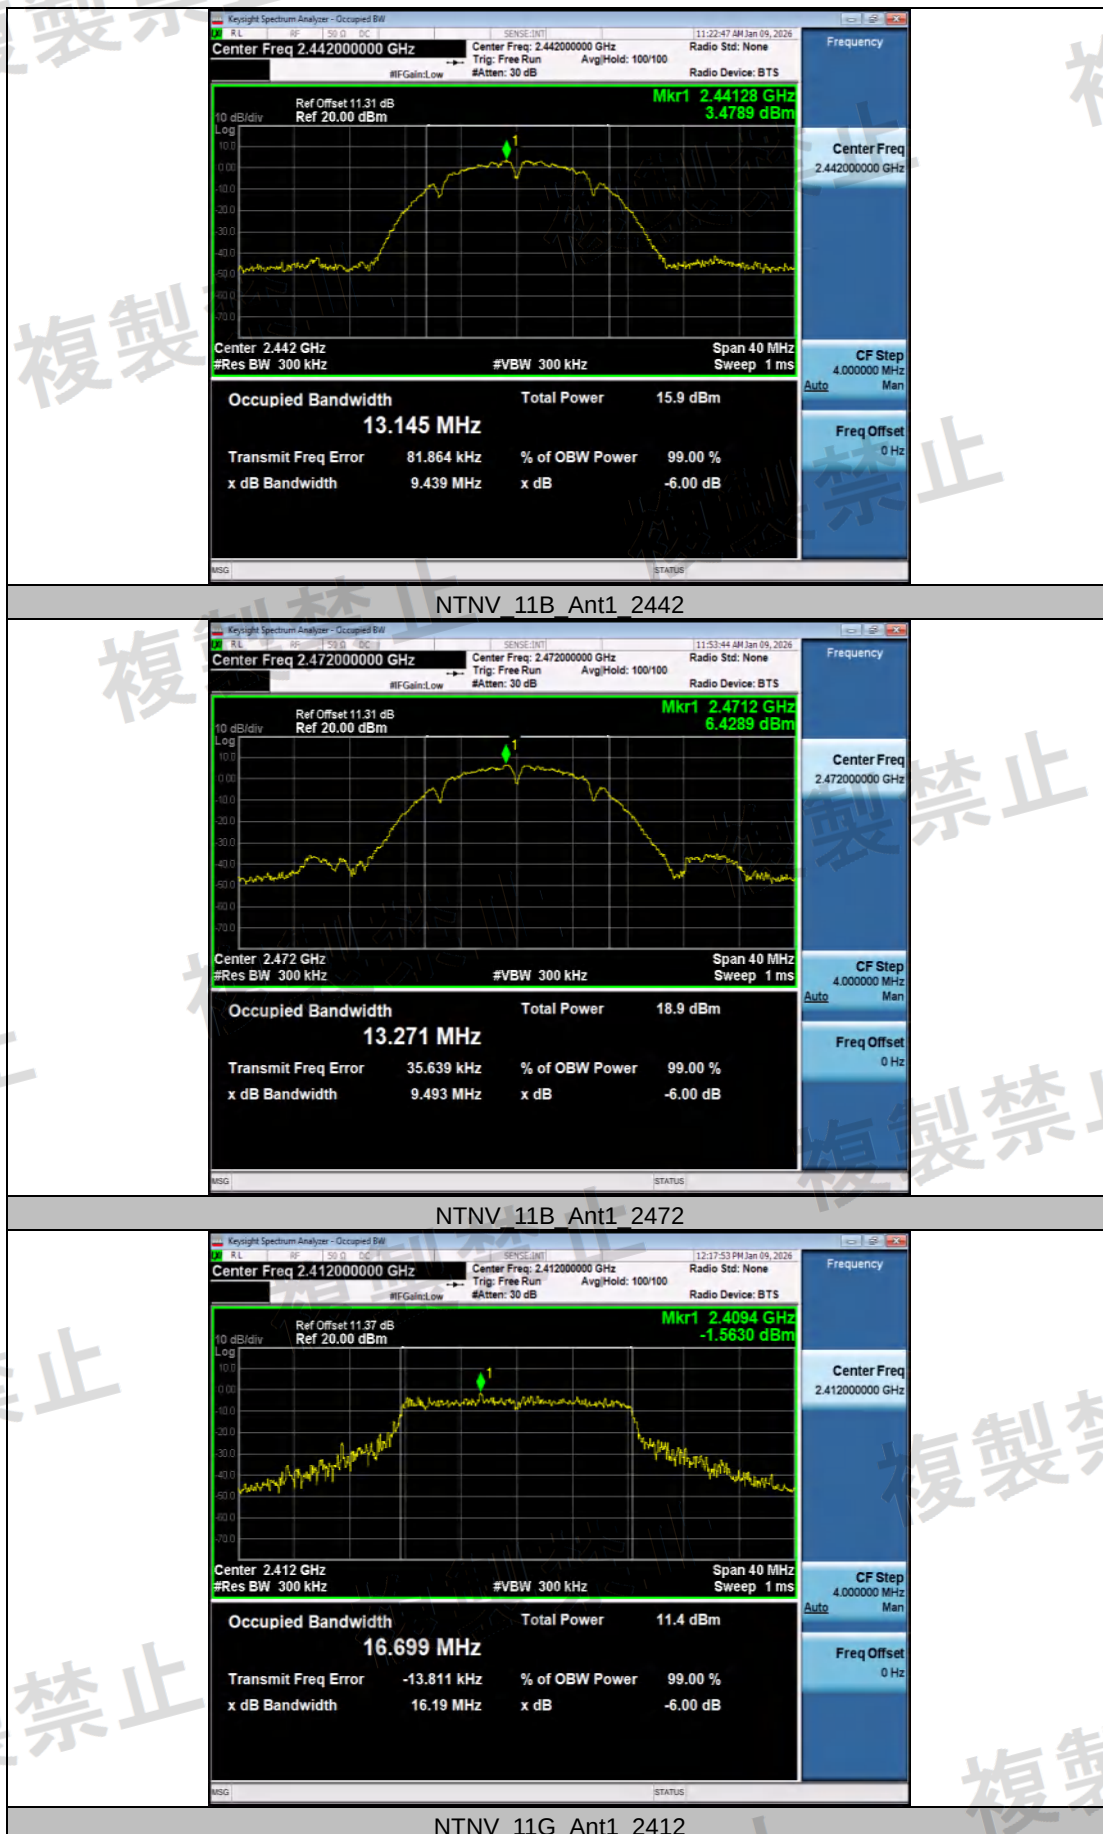



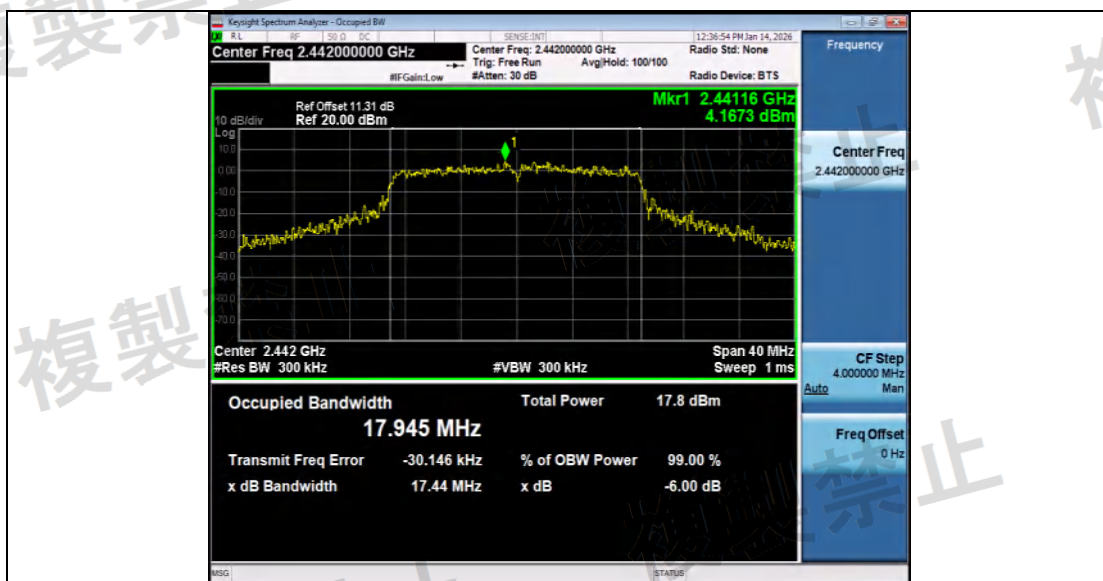


NTV 11N20SISO Ant1 2442

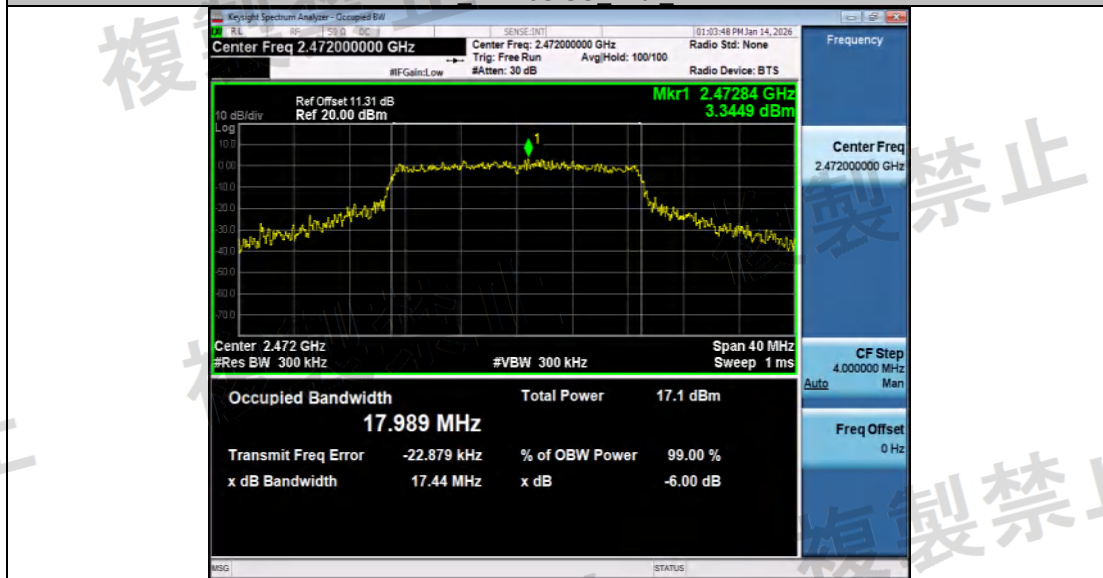


NTV 11N20SISO Ant1 2472




NTV 11N40SISO Ant1 2422

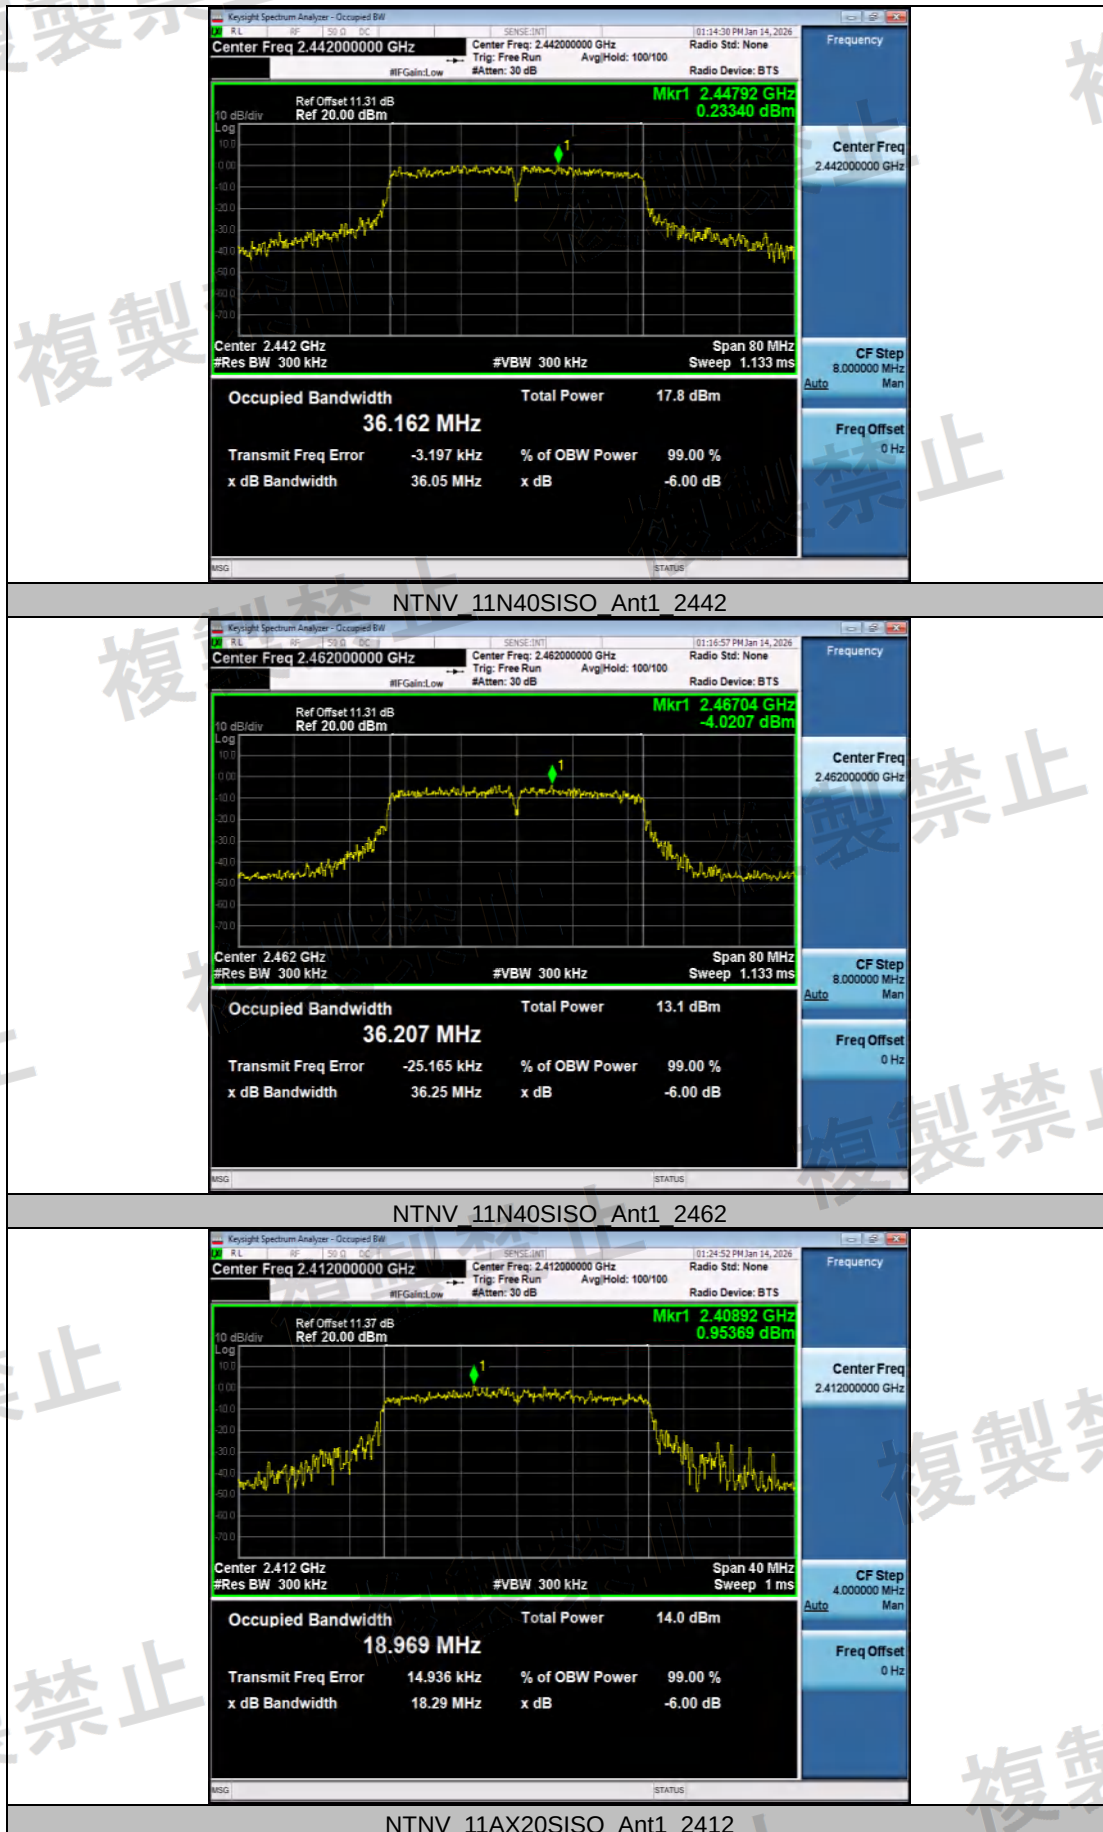

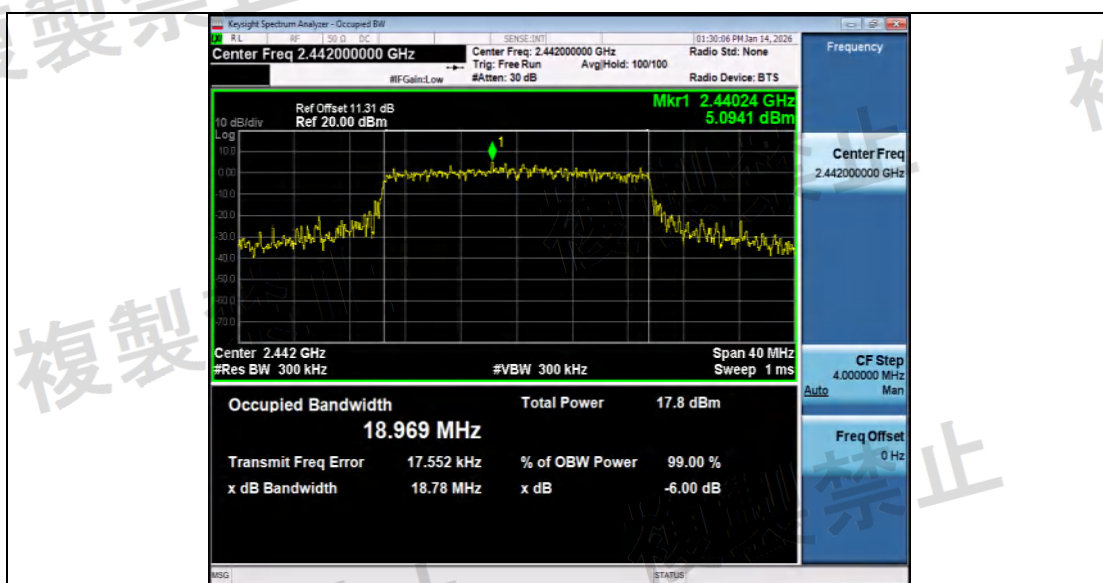


NTNV 11AX20SISO_Ant1_2442

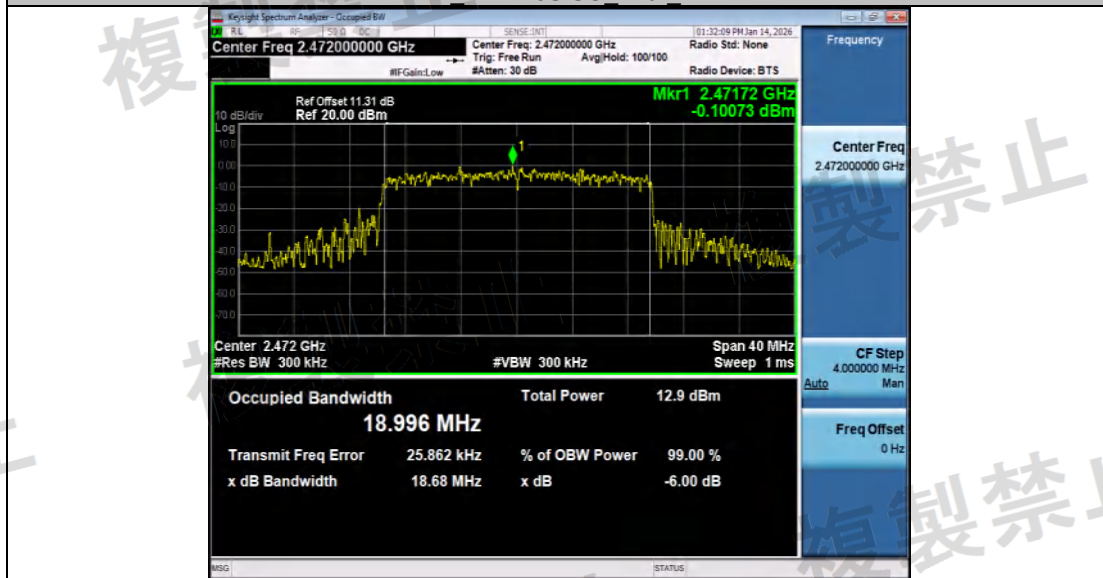

NTNV 11AX20SISO_Ant1_2472



NTNV 11AX40SISO_Ant1_2422

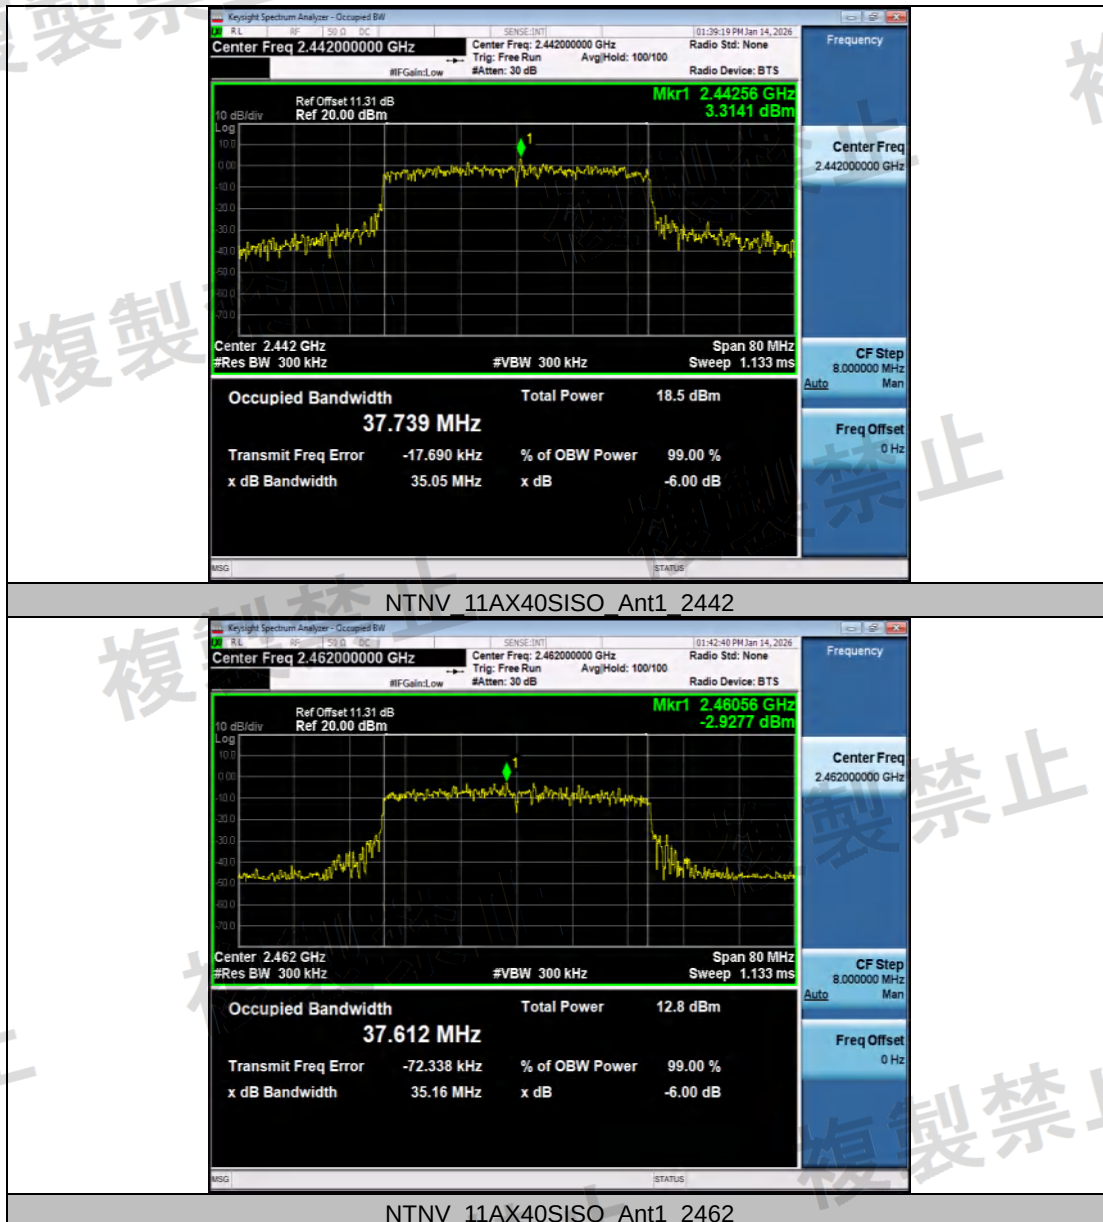

Appendix D: Transmitter Spurious Emissions


Test Result:


TestCondition	TestMode	Antenna	Freq(M Hz)	Freq.Range [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	11B	Ant1	2412	30~2387	-44.70	≤-26	0.03388	≤2.5	PASS
				2387~2400	-35.91	≤-16	0.25645	≤25	PASS
				2483.5~2496.5	-37.78	≤-16	0.16672	≤25	PASS
				2496.5~13000	-43.44	≤-26	0.04529	≤2.5	PASS
			2442	30~2387	-45.99	≤-26	0.02518	≤2.5	PASS
				2387~2400	-38.59	≤-16	0.13836	≤25	PASS
				2483.5~2496.5	-38.25	≤-16	0.14962	≤25	PASS
				2496.5~13000	-37.56	≤-26	0.17539	≤2.5	PASS
			2472	30~2387	-46.49	≤-26	0.02244	≤2.5	PASS
				2387~2400	-39.21	≤-16	0.11995	≤25	PASS
				2483.5~2496.5	-31.09	≤-16	0.77804	≤25	PASS
				2496.5~13000	-41.69	≤-26	0.06776	≤2.5	PASS
	11G	Ant1	2412	30~2387	-47.11	≤-26	0.01945	≤2.5	PASS
				2387~2400	-18.53	≤-16	14.02814	≤25	See table below
				2483.5~2496.5	-38.79	≤-16	0.13213	≤25	PASS
				2496.5~13000	-42.60	≤-26	0.05495	≤2.5	PASS
			2442	30~2387	-45.48	≤-26	0.02831	≤2.5	PASS
				2387~2400	-39.41	≤-16	0.11455	≤25	PASS
				2483.5~2496.5	-38.50	≤-16	0.14125	≤25	PASS
				2496.5~13000	-42.51	≤-26	0.05610	≤2.5	PASS
			2472	30~2387	-46.05	≤-26	0.02483	≤2.5	PASS
				2387~2400	-38.36	≤-16	0.14588	≤25	PASS
				2483.5~2496.5	-20.80	≤-16	8.31764	≤25	PASS
				2496.5~13000	-42.82	≤-26	0.05224	≤2.5	PASS
	11N20SI SO	Ant1	2412	30~2387	-46.49	≤-26	0.02244	≤2.5	PASS
				2387~2400	-18.64	≤-16	13.67729	≤25	See table below
				2483.5~2496.5	-38.17	≤-16	0.15241	≤25	PASS
				2496.5~13000	-43.21	≤-26	0.04775	≤2.5	PASS
			2442	30~2387	-41.16	≤-26	0.07656	≤2.5	PASS
				2387~2400	-39.08	≤-16	0.12359	≤25	PASS
				2483.5~2496.5	-37.53	≤-16	0.17660	≤25	PASS
				2496.5~13000	-42.70	≤-26	0.05370	≤2.5	PASS
			2472	30~2387	-46.50	≤-26	0.02239	≤2.5	PASS
				2387~2400	-37.91	≤-16	0.16181	≤25	PASS
				2483.5~2496.5	-16.68	≤-16	21.47830	≤25	See table below
				2496.5~13000	-43.42	≤-26	0.04550	≤2.5	PASS
	11N40SI SO	Ant1	2422	30~2387	-45.70	≤-26	0.02692	≤2.5	PASS
				2387~2400	-22.04	≤-16	6.25173	≤25	PASS
				2483.5~2496.5	-37.21	≤-16	0.19011	≤25	PASS
				2496.5~13000	-42.58	≤-26	0.05521	≤2.5	PASS
			2442	30~2387	-42.81	≤-26	0.05236	≤2.5	PASS


	11AX20S ISO	Ant1		2387~2400	-36.91	≤-16	0.20370	≤25	PASS
				2483.5~2496.5	-33.30	≤-16	0.46774	≤25	PASS
				2496.5~13000	-42.08	≤-26	0.06194	≤2.5	PASS
			2462	30~2387	-46.22	≤-26	0.02388	≤2.5	PASS
				2387~2400	-38.75	≤-16	0.13335	≤25	PASS
				2483.5~2496.5	-22.50	≤-16	5.62341	≤25	PASS
				2496.5~13000	-40.98	≤-26	0.07980	≤2.5	PASS
			2412	30~2387	-46.58	≤-26	0.02198	≤2.5	PASS
				2387~2400	-21.21	≤-16	7.56833	≤25	PASS
				2483.5~2496.5	-37.65	≤-16	0.17179	≤25	PASS
	11AX40S ISO	Ant1	2442	2496.5~13000	-43.34	≤-26	0.04634	≤2.5	PASS
				30~2387	-41.35	≤-26	0.07328	≤2.5	PASS
				2387~2400	-38.56	≤-16	0.13932	≤25	PASS
			2472	2483.5~2496.5	-38.05	≤-16	0.15668	≤25	PASS
				2496.5~13000	-42.09	≤-26	0.06180	≤2.5	PASS
				30~2387	-46.31	≤-26	0.02339	≤2.5	PASS
			2422	2387~2400	-38.57	≤-16	0.13900	≤25	PASS
				2483.5~2496.5	-16.35	≤-16	23.1739 5	≤25	See table below
				2496.5~13000	-42.71	≤-26	0.05358	≤2.5	PASS
	11AX40S ISO	Ant1	2422	30~2387	-43.05	≤-26	0.04955	≤2.5	PASS
				2387~2400	-22.45	≤-16	5.68853	≤25	PASS
				2483.5~2496.5	-38.18	≤-16	0.15205	≤25	PASS
			2442	2496.5~13000	-42.79	≤-26	0.05260	≤2.5	PASS
				30~2387	-39.97	≤-26	0.10069	≤2.5	PASS
				2387~2400	-34.30	≤-16	0.37154	≤25	PASS
			2462	2483.5~2496.5	-33.11	≤-16	0.48865	≤25	PASS
				2496.5~13000	-43.26	≤-26	0.04721	≤2.5	PASS
				30~2387	-46.25	≤-26	0.02371	≤2.5	PASS
	11AX40S ISO	Ant1	2462	2387~2400	-38.56	≤-16	0.13932	≤25	PASS
				2483.5~2496.5	-21.37	≤-16	7.29458	≤25	PASS
				2496.5~13000	-42.79	≤-26	0.05260	≤2.5	PASS


Test Result_Step2


TestCondition	TestMode	PreScan In Ant	Channel	Ant	Freq. [MHz]	Result [dBm/ MHz]	Limit [dBm/ MHz]	Result [μW/MHz]	Limit [μW/M Hz]	Verdict
NTNV	11G	Ant1	2412	Ant1	2399.41	-35.00	≤-16	0.31623	≤25	PASS
	11N20SI SO	Ant1	2412	Ant1	2399.63	-31.94	≤-16	0.63973	≤25	PASS
			2472	Ant1	2483.72	-31.17	≤-16	0.76384	≤25	PASS
	11AX20S ISO	Ant1	2472	Ant1	2484.28	-33.82	≤-16	0.41495	≤25	PASS

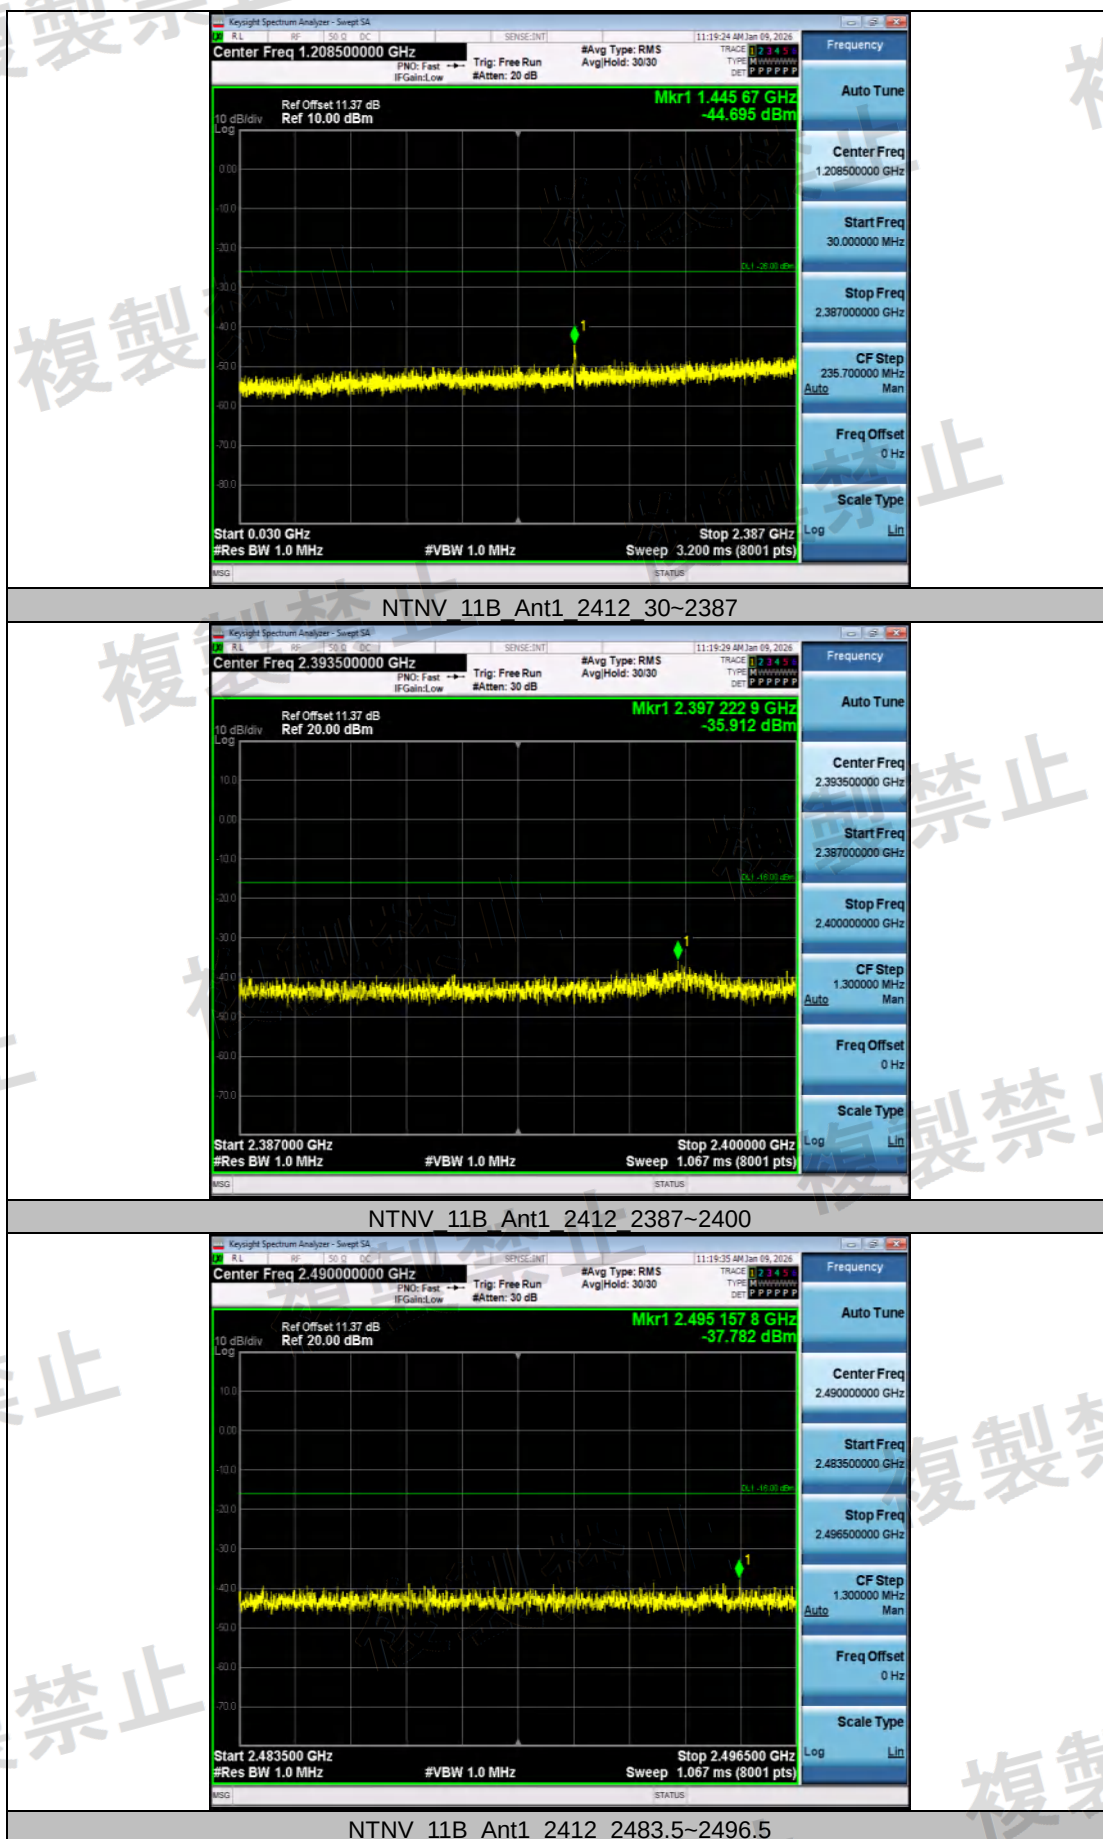


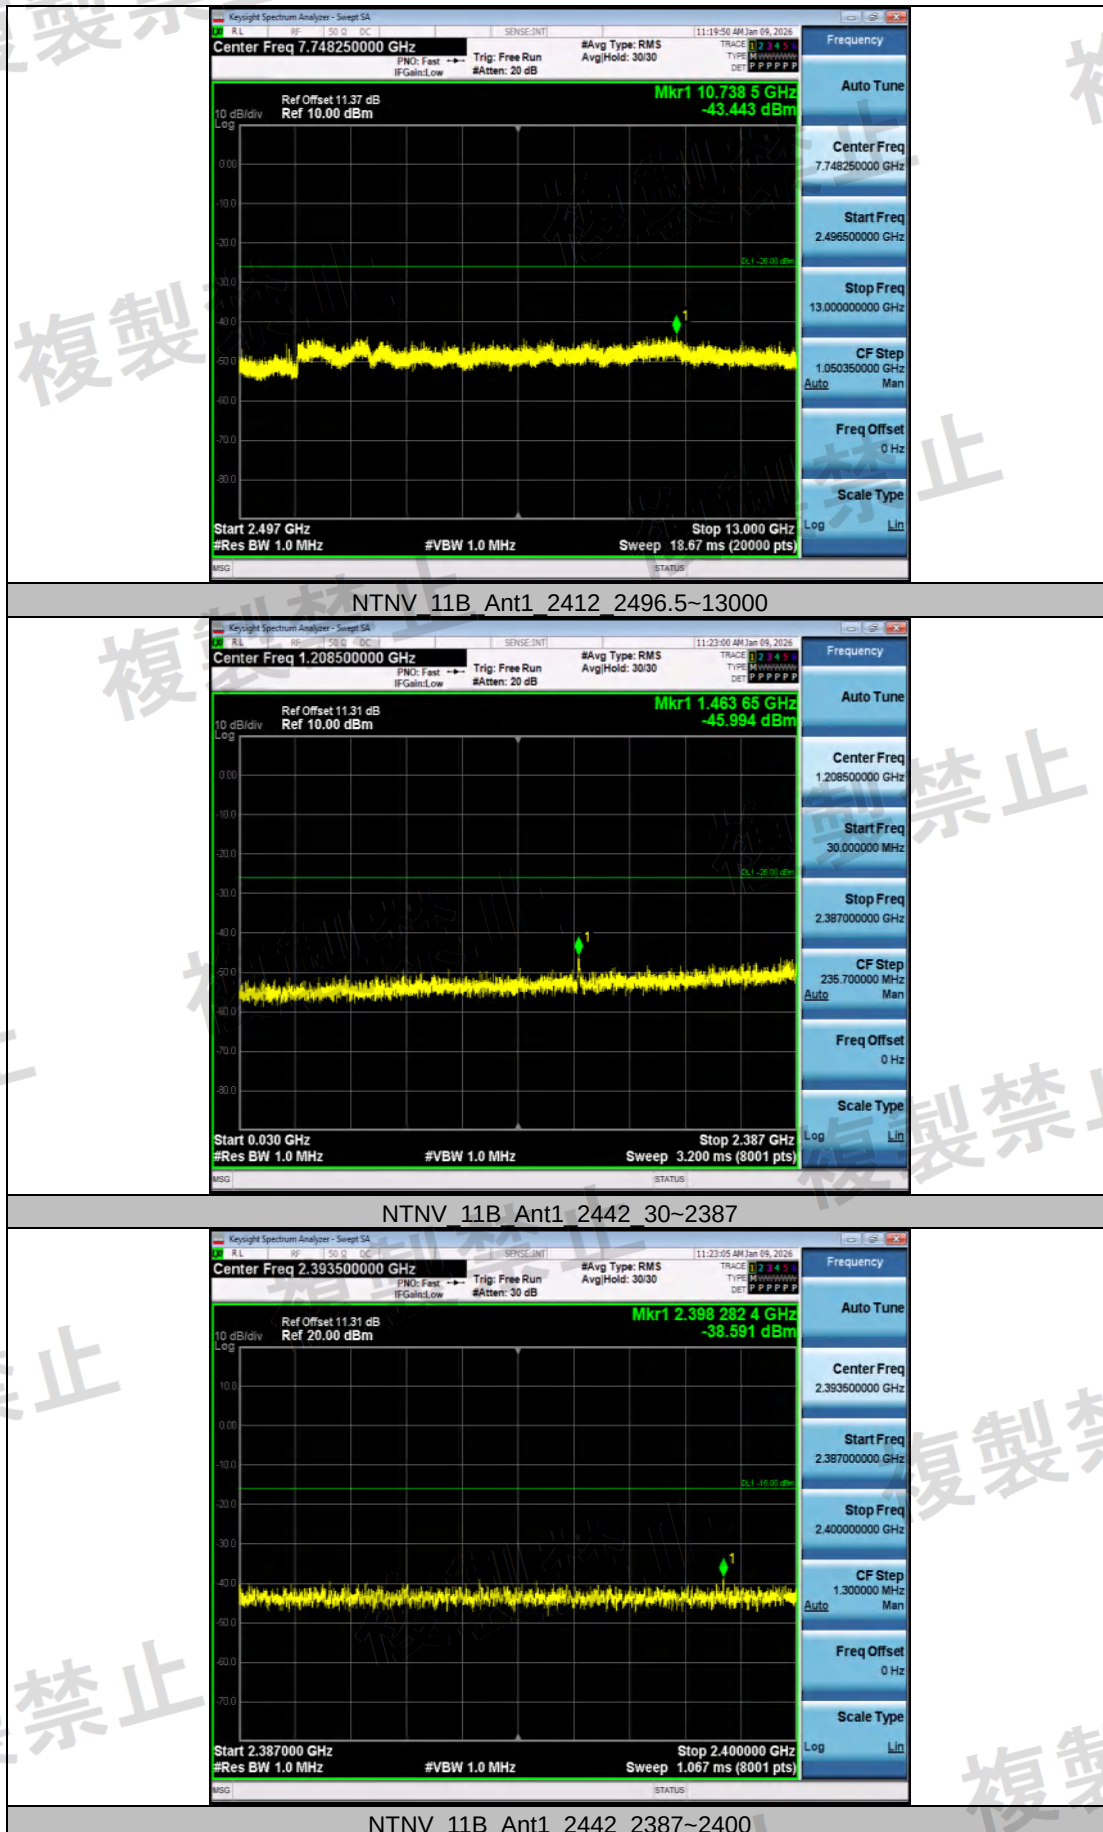


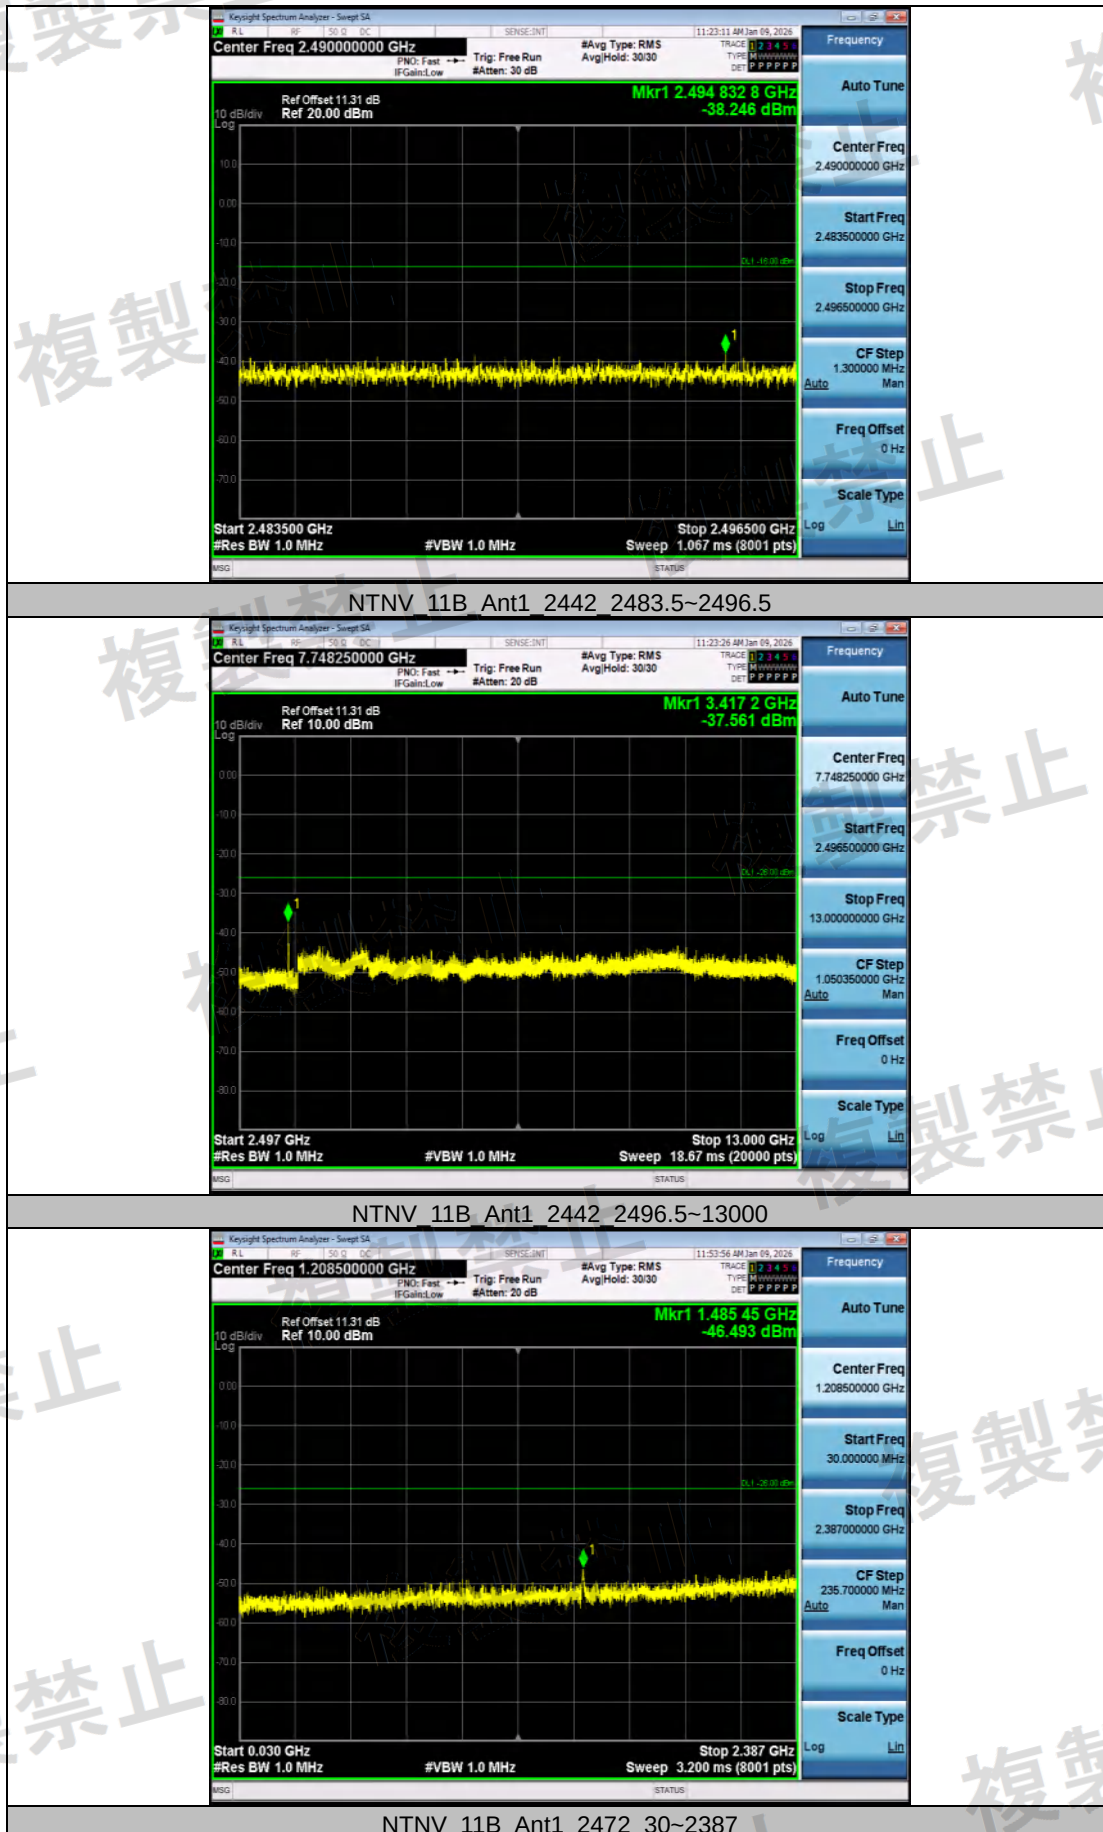


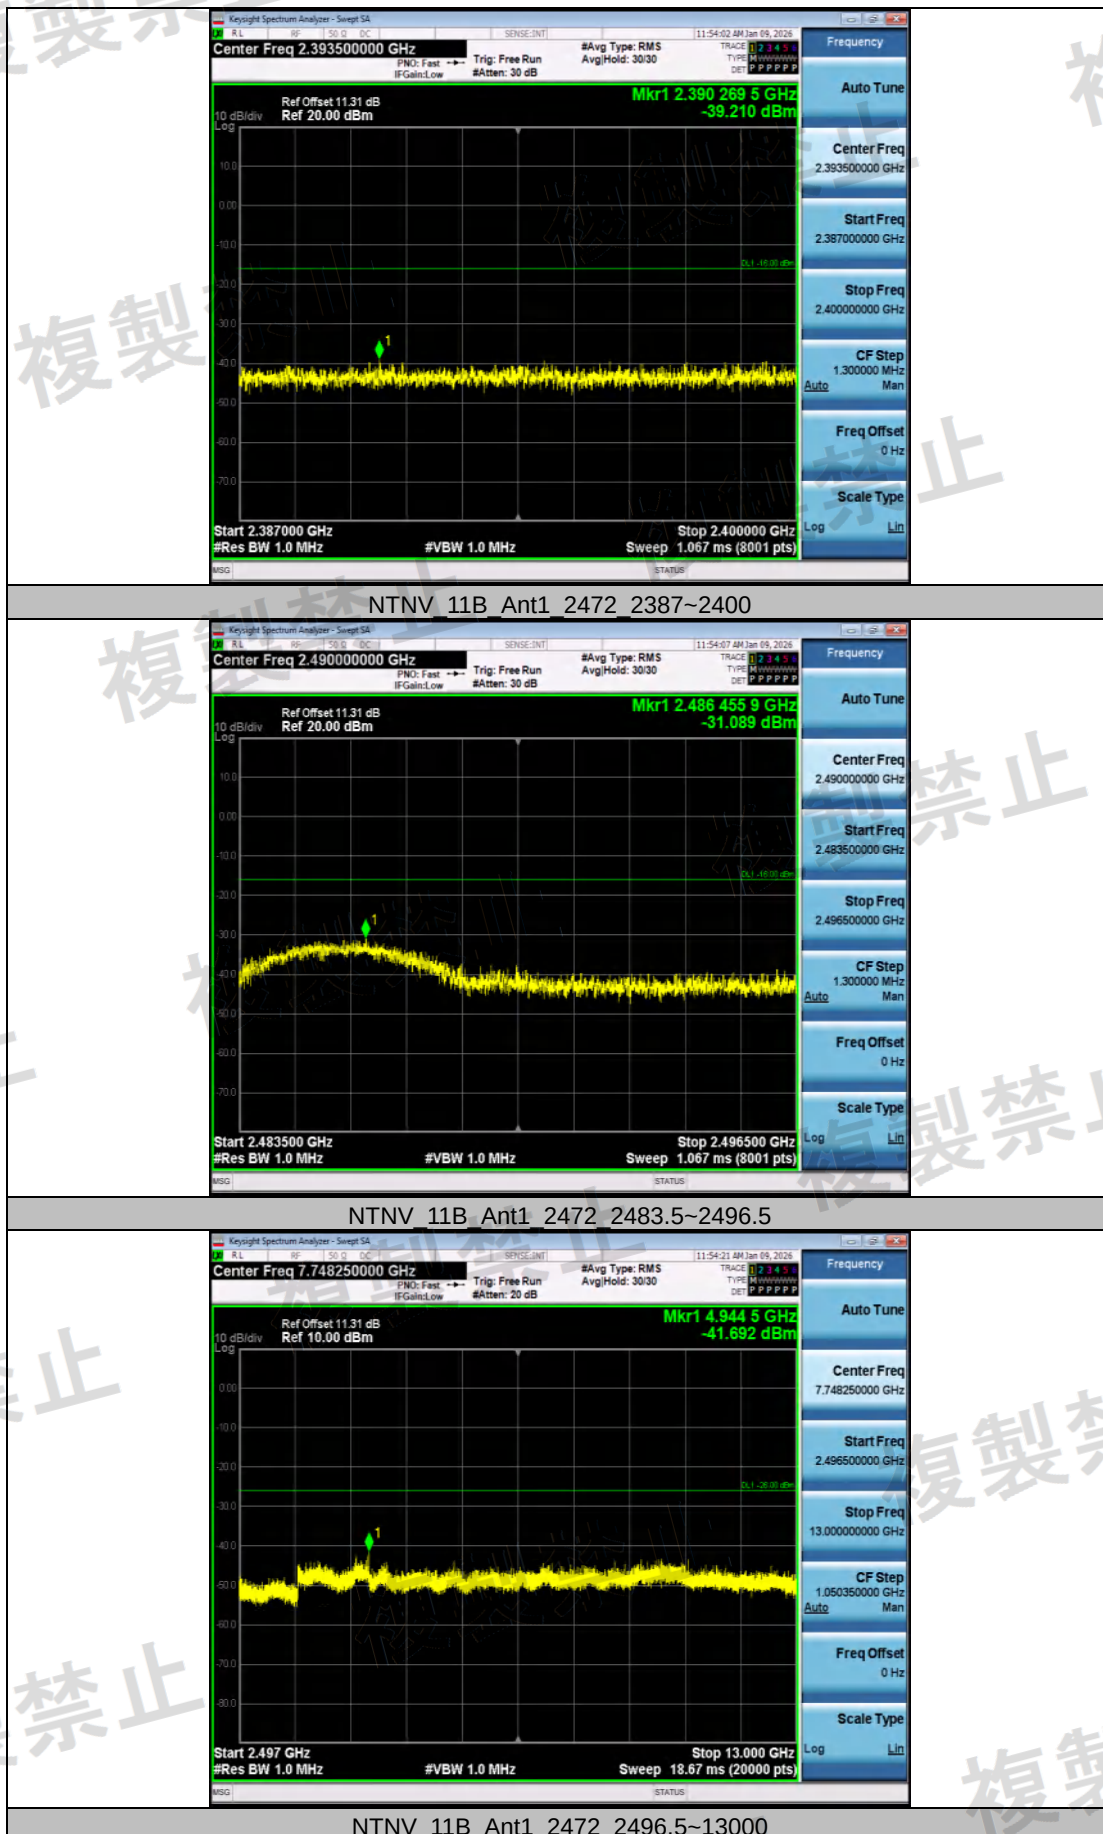


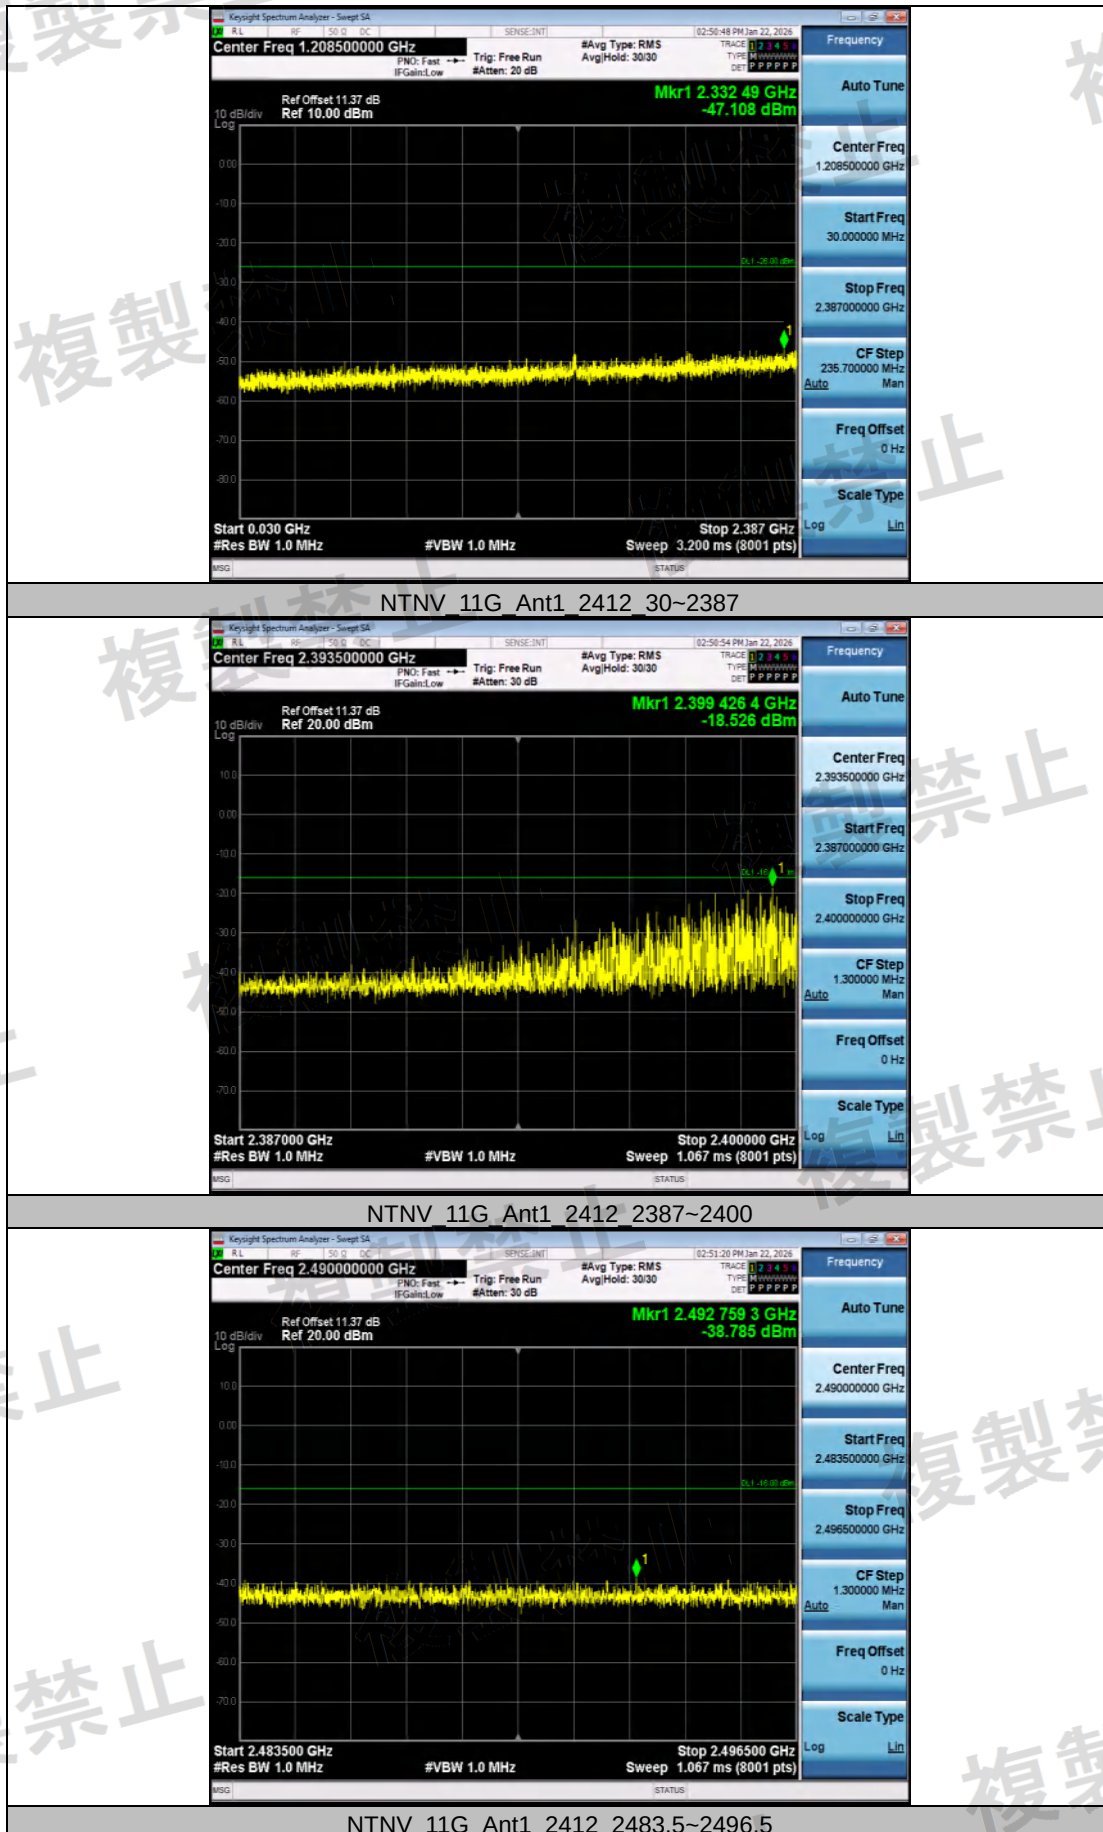


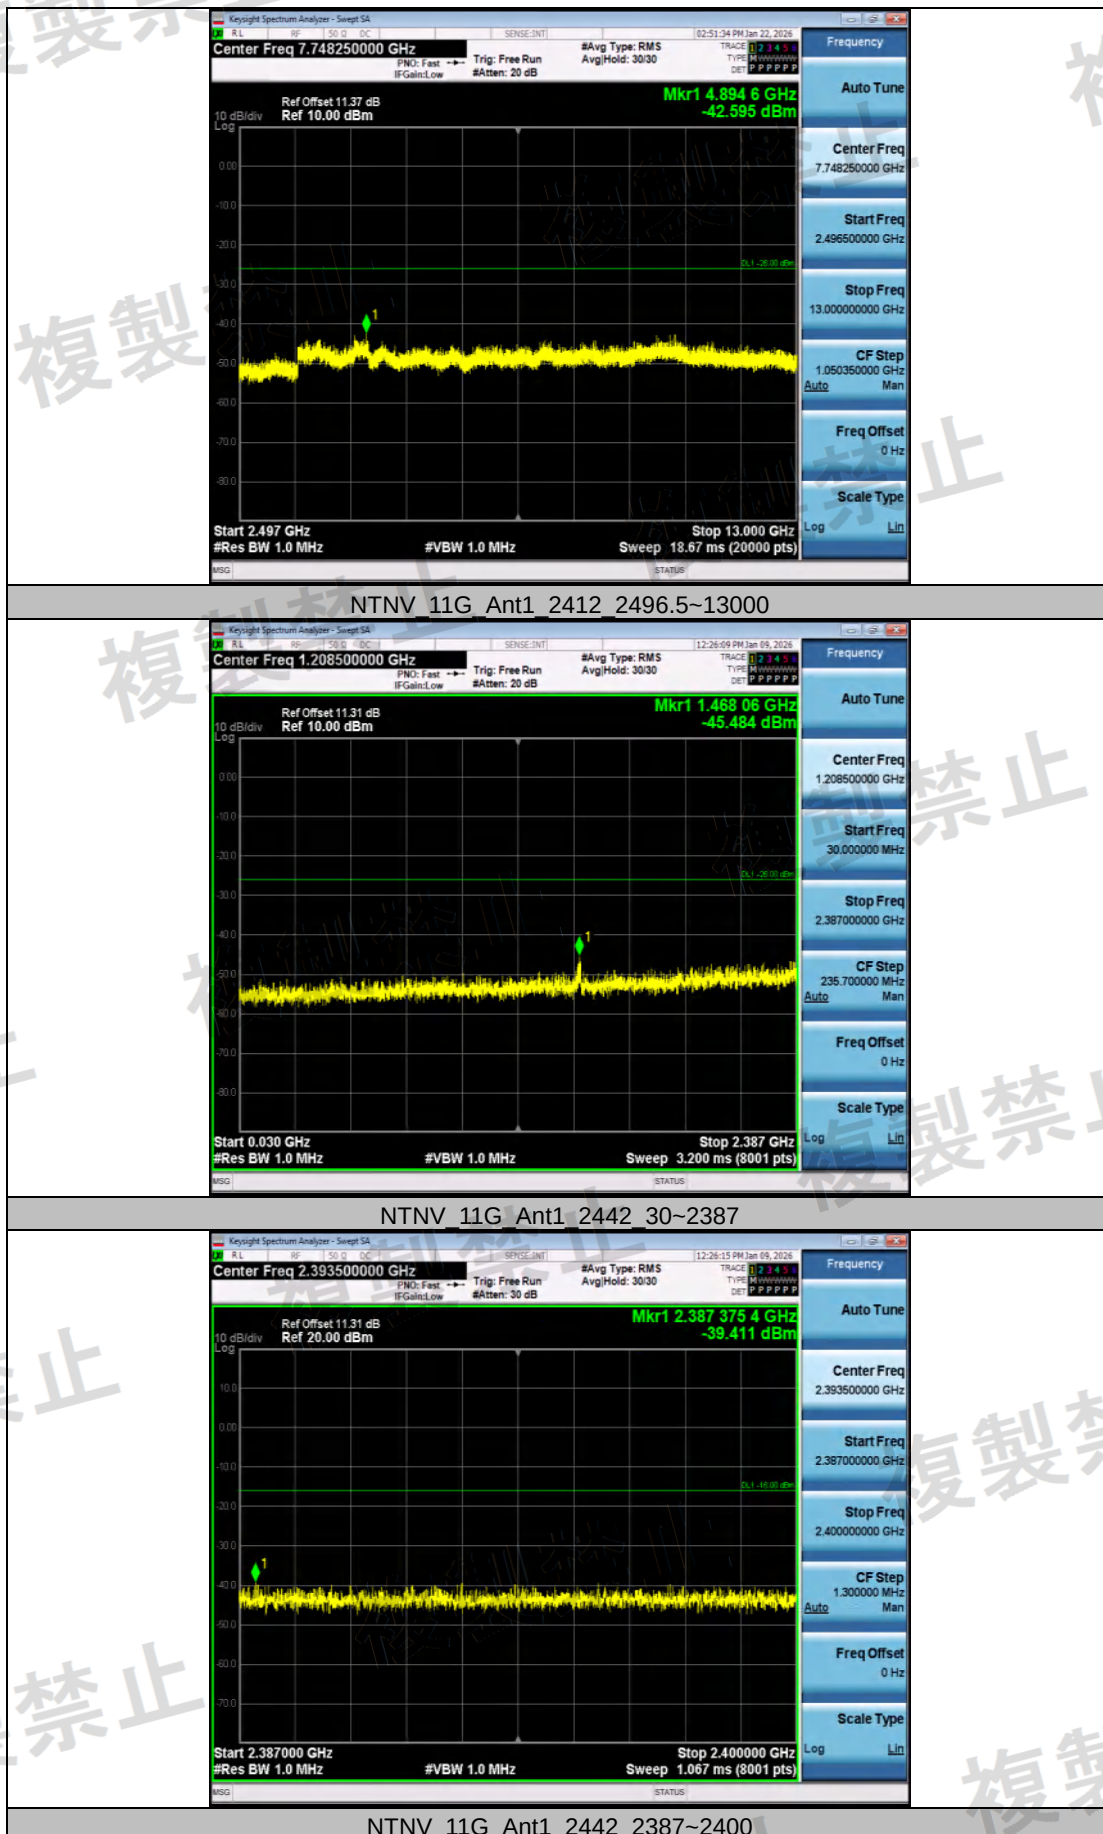


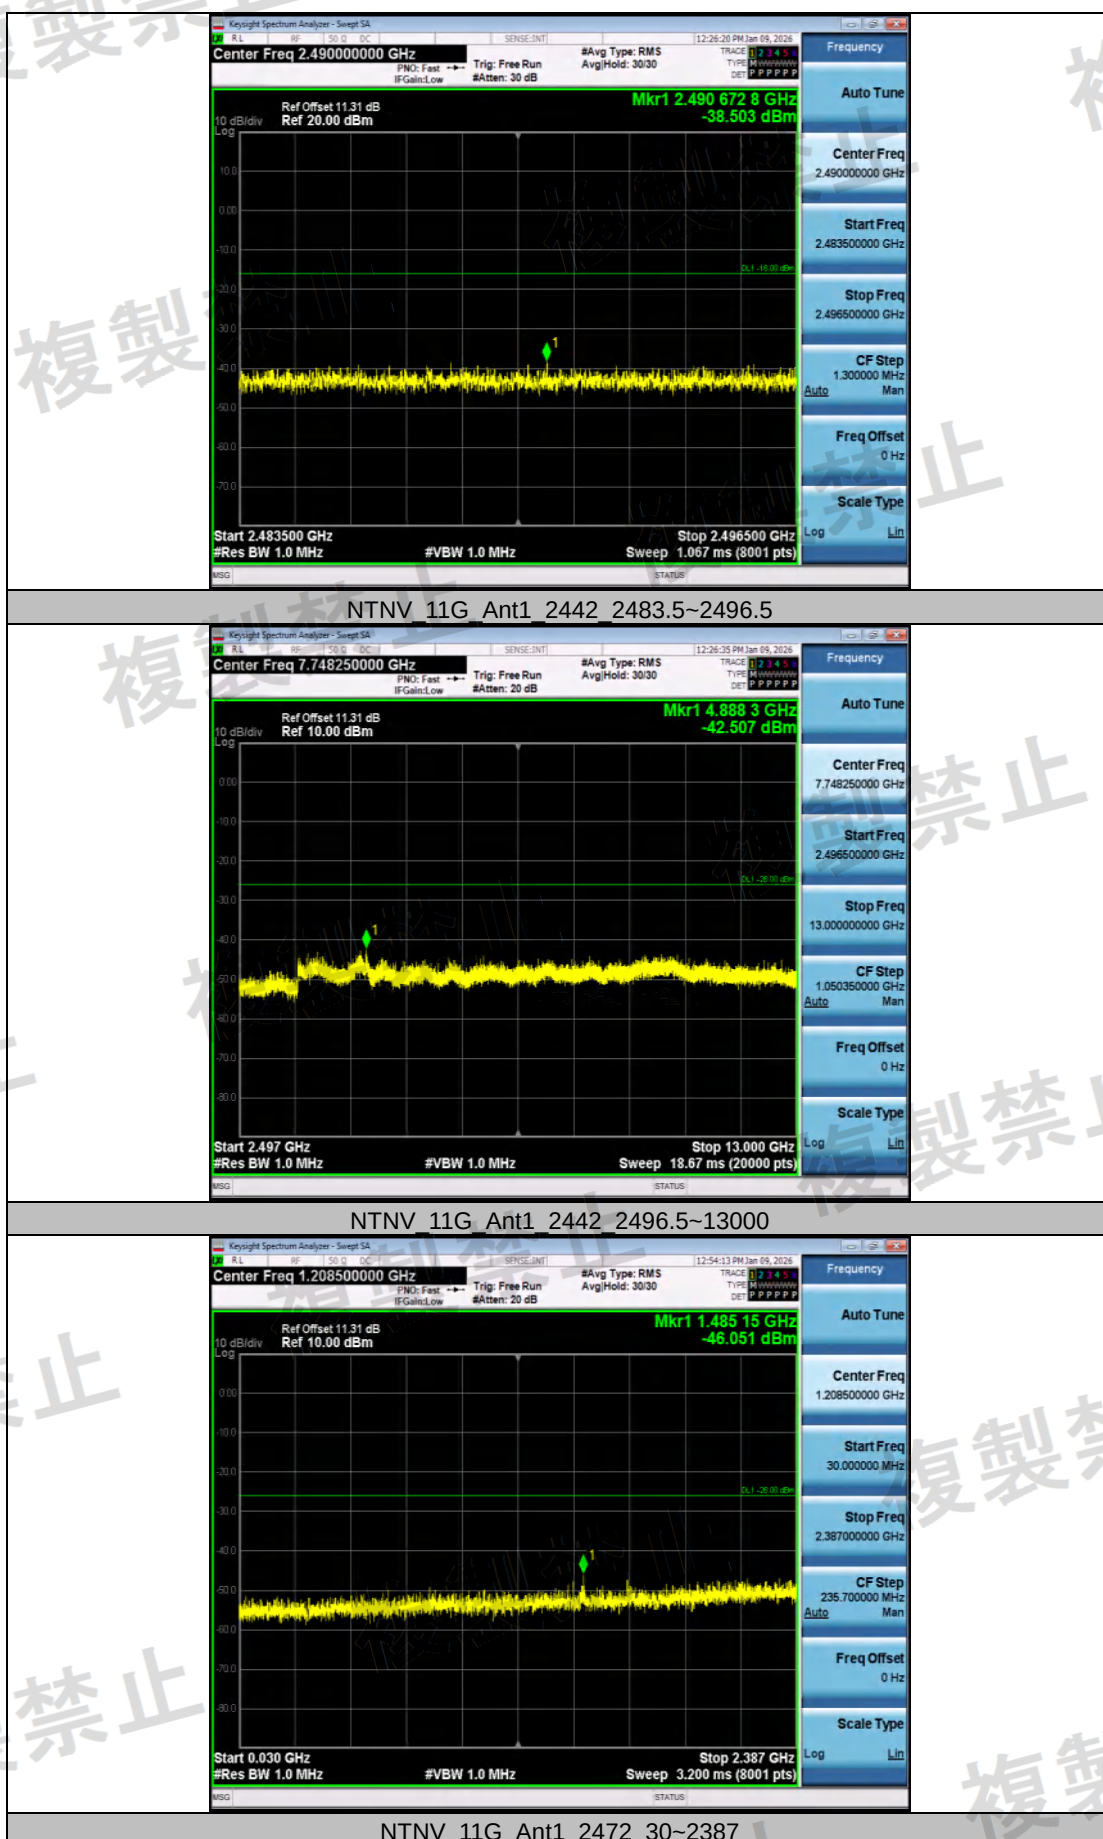


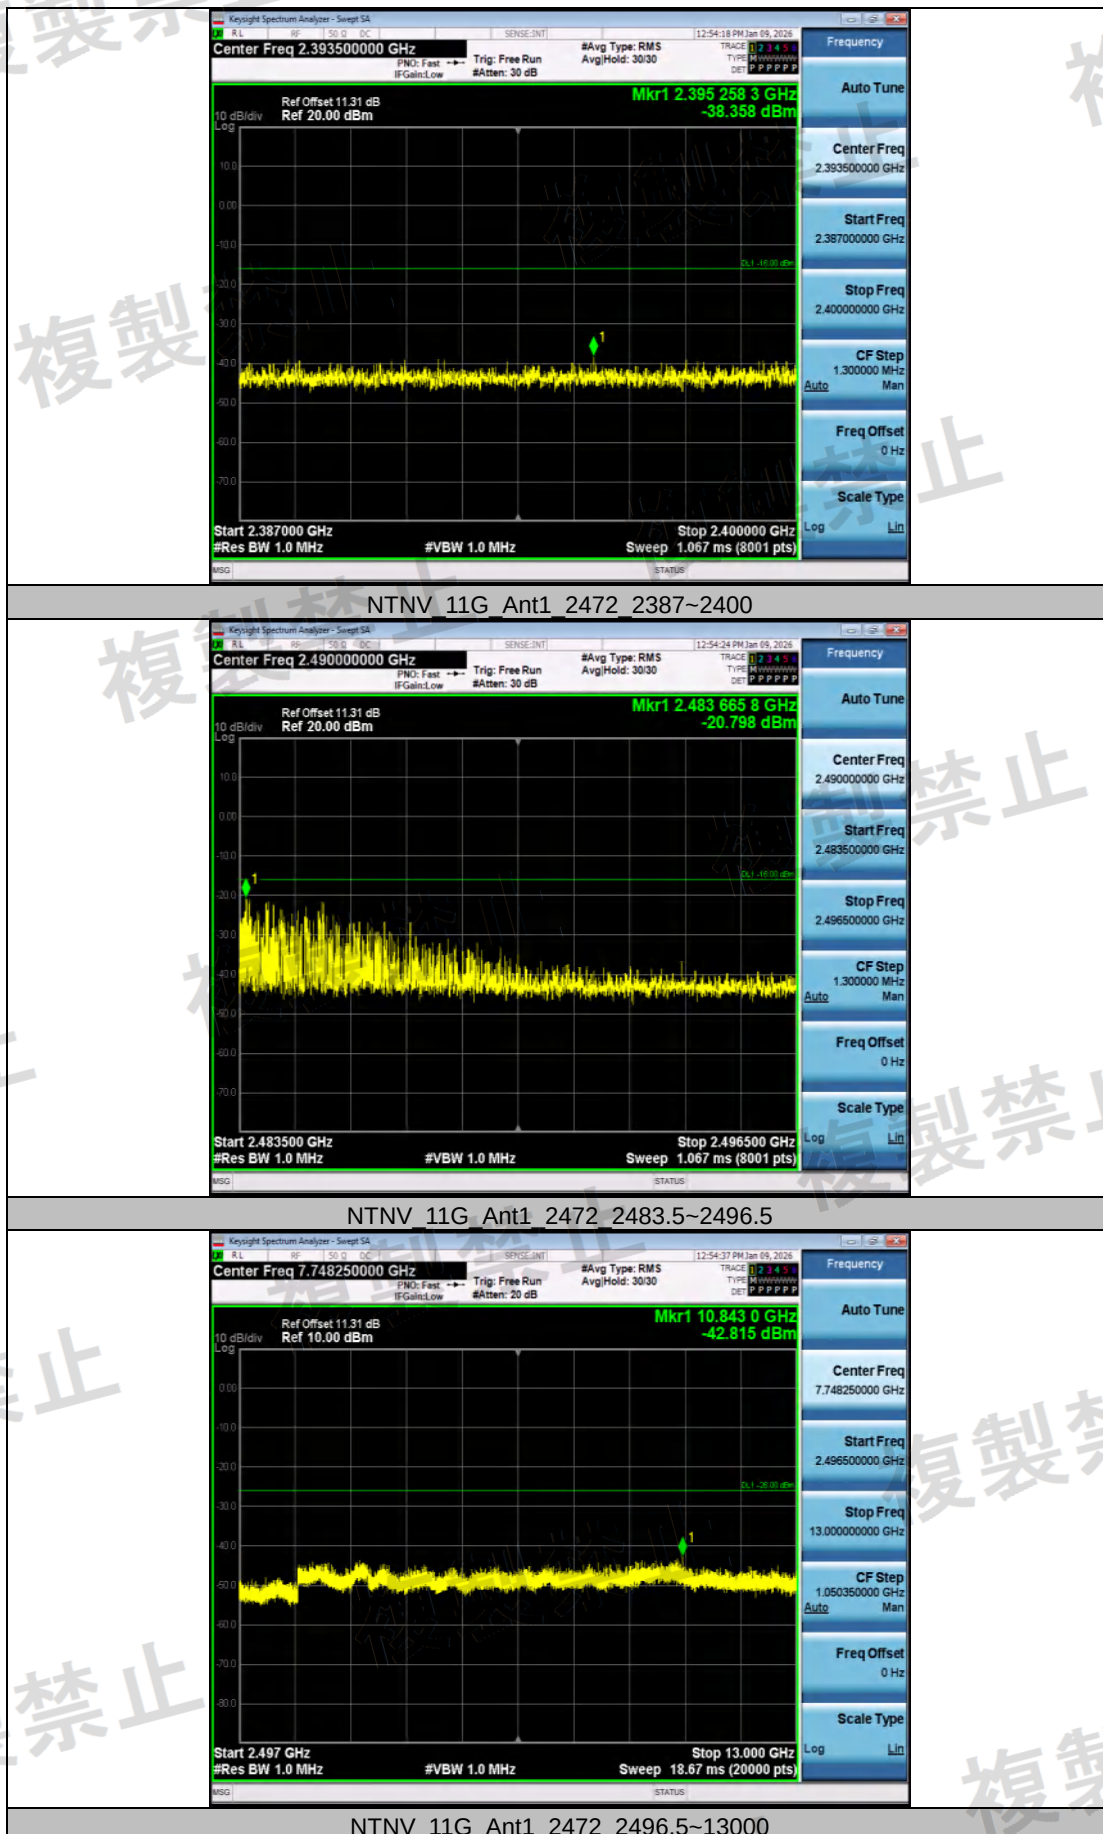


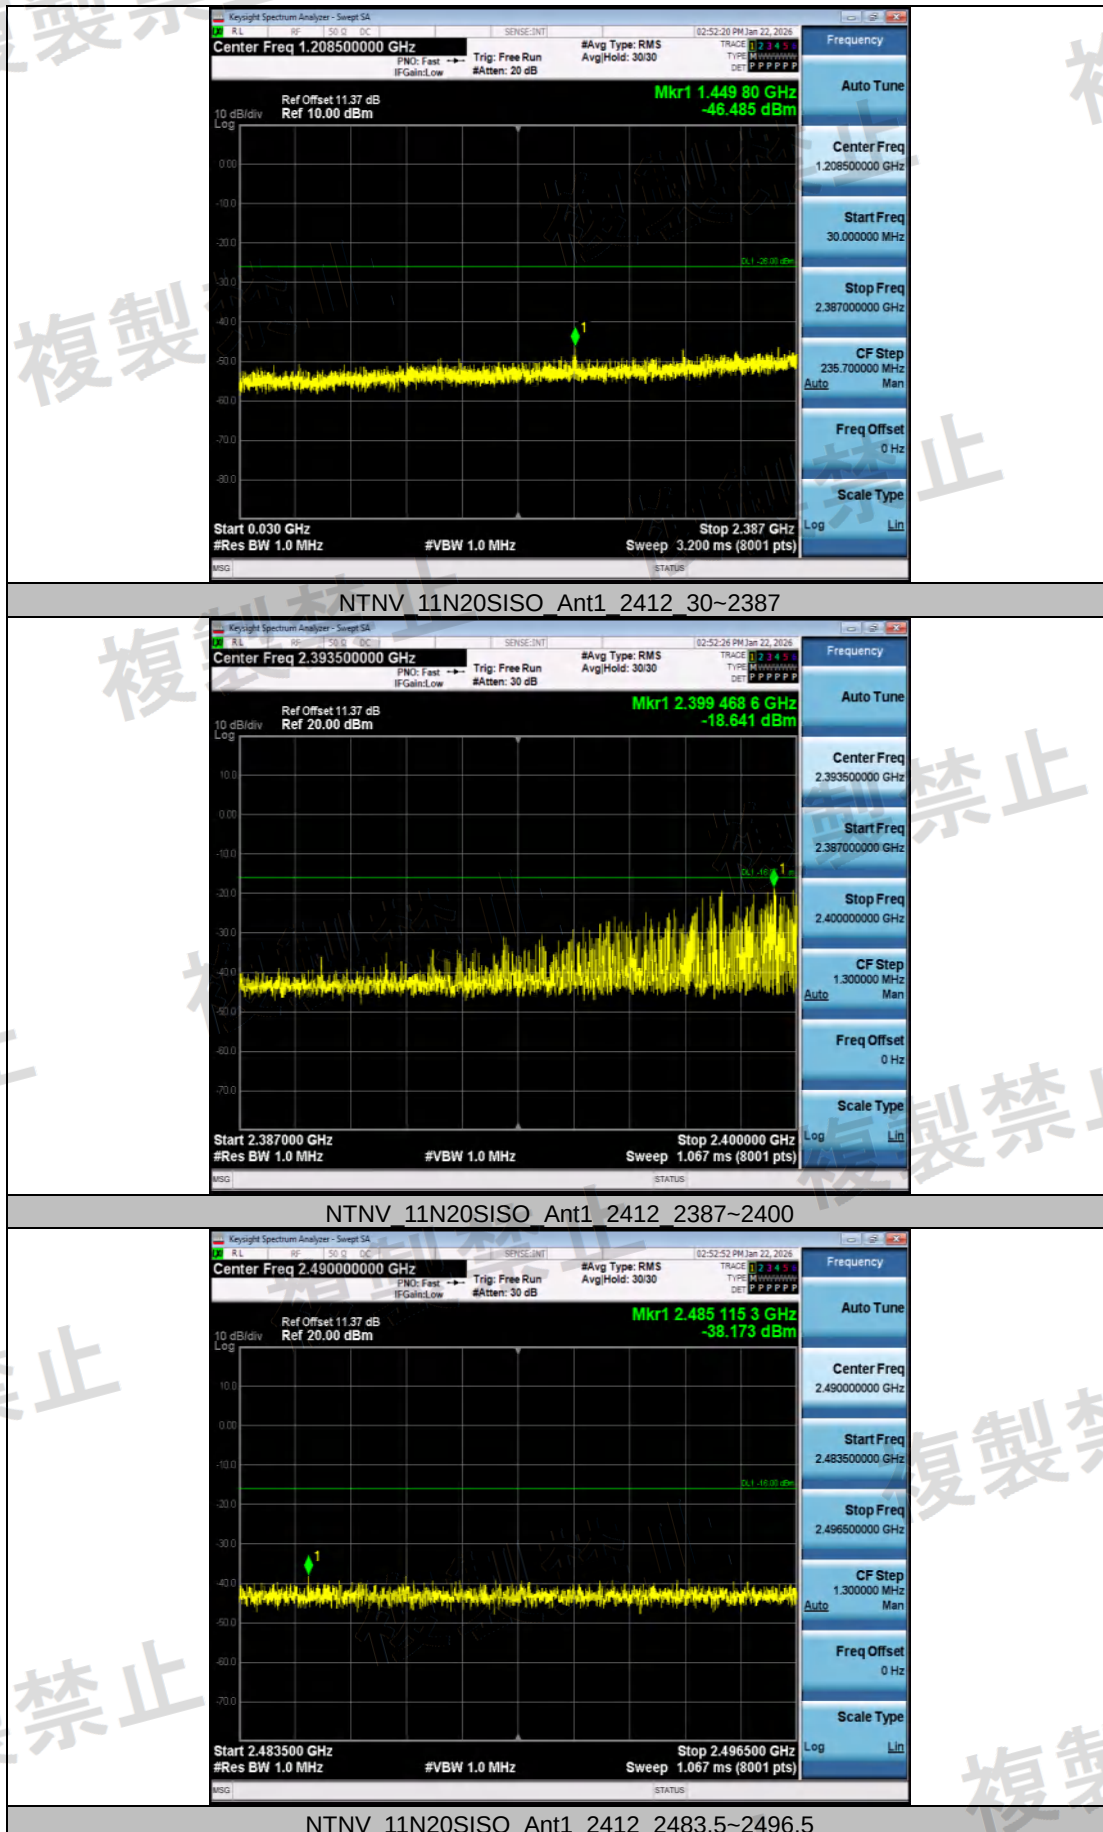


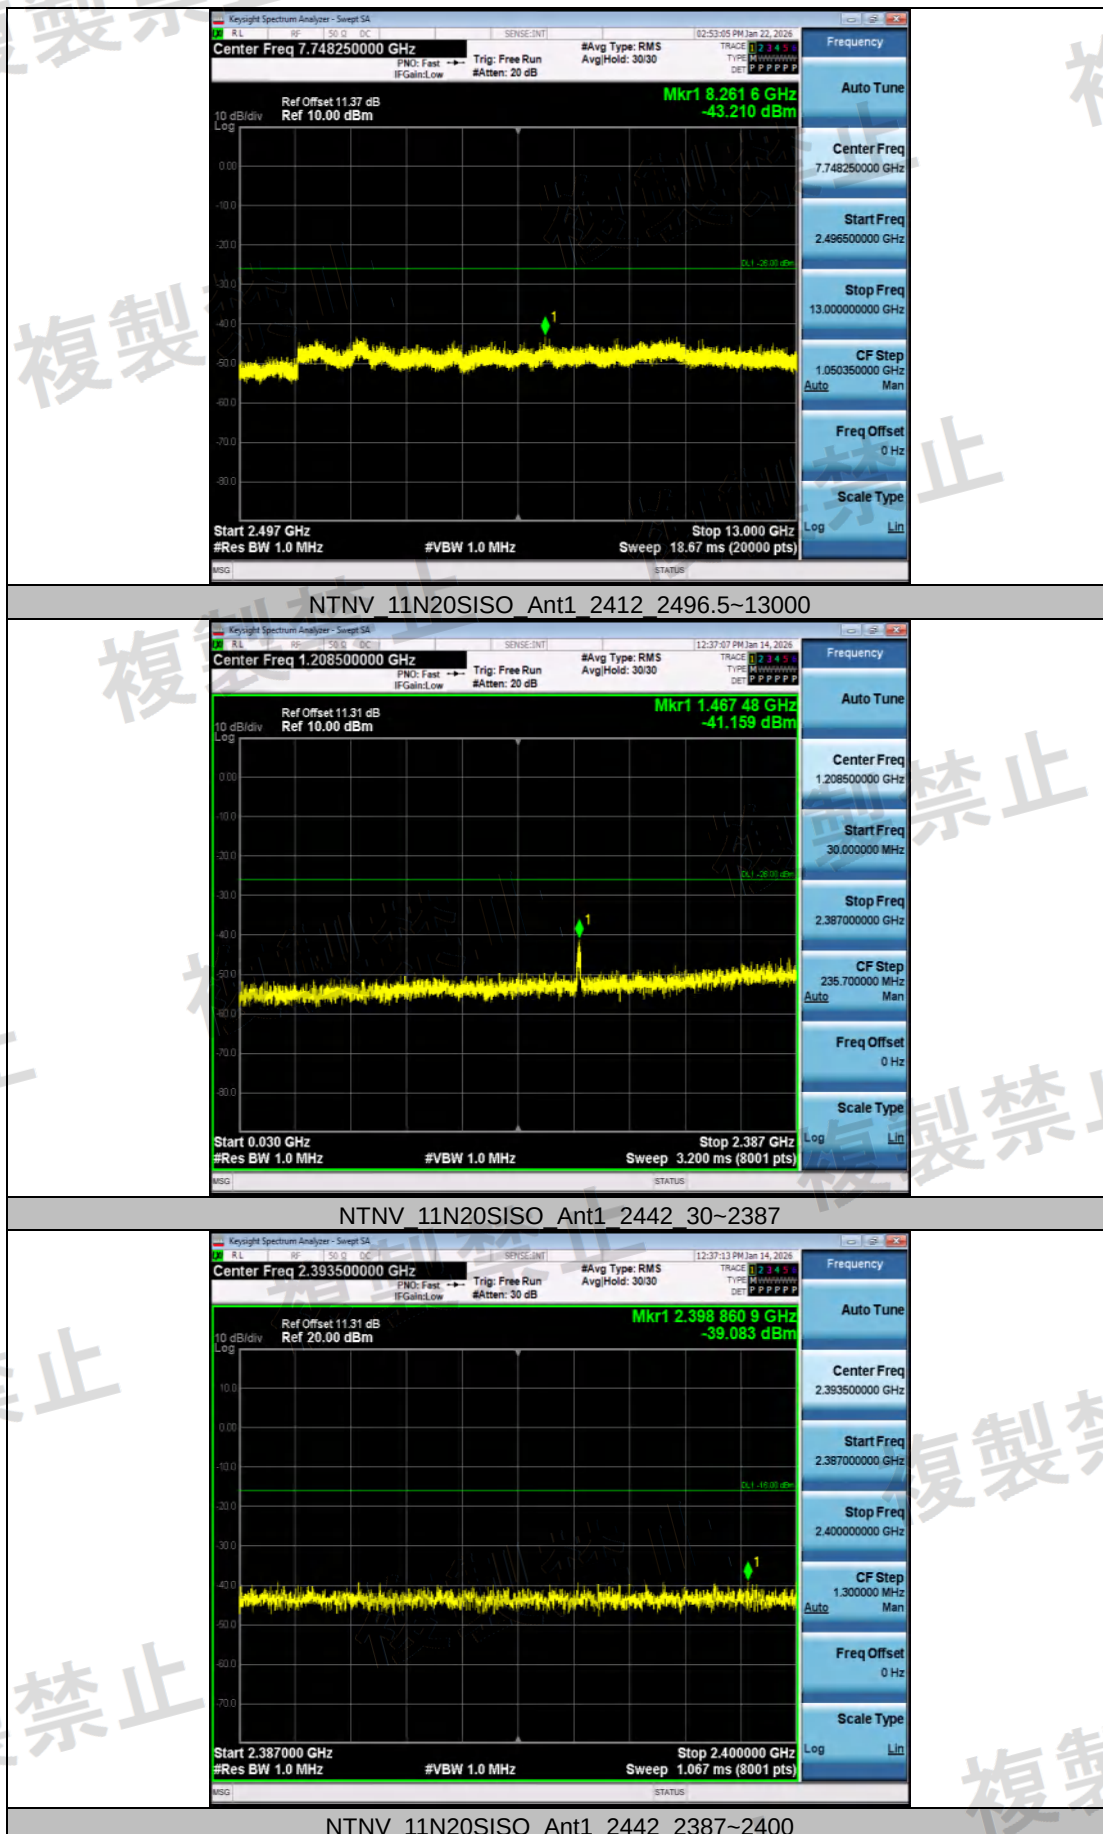


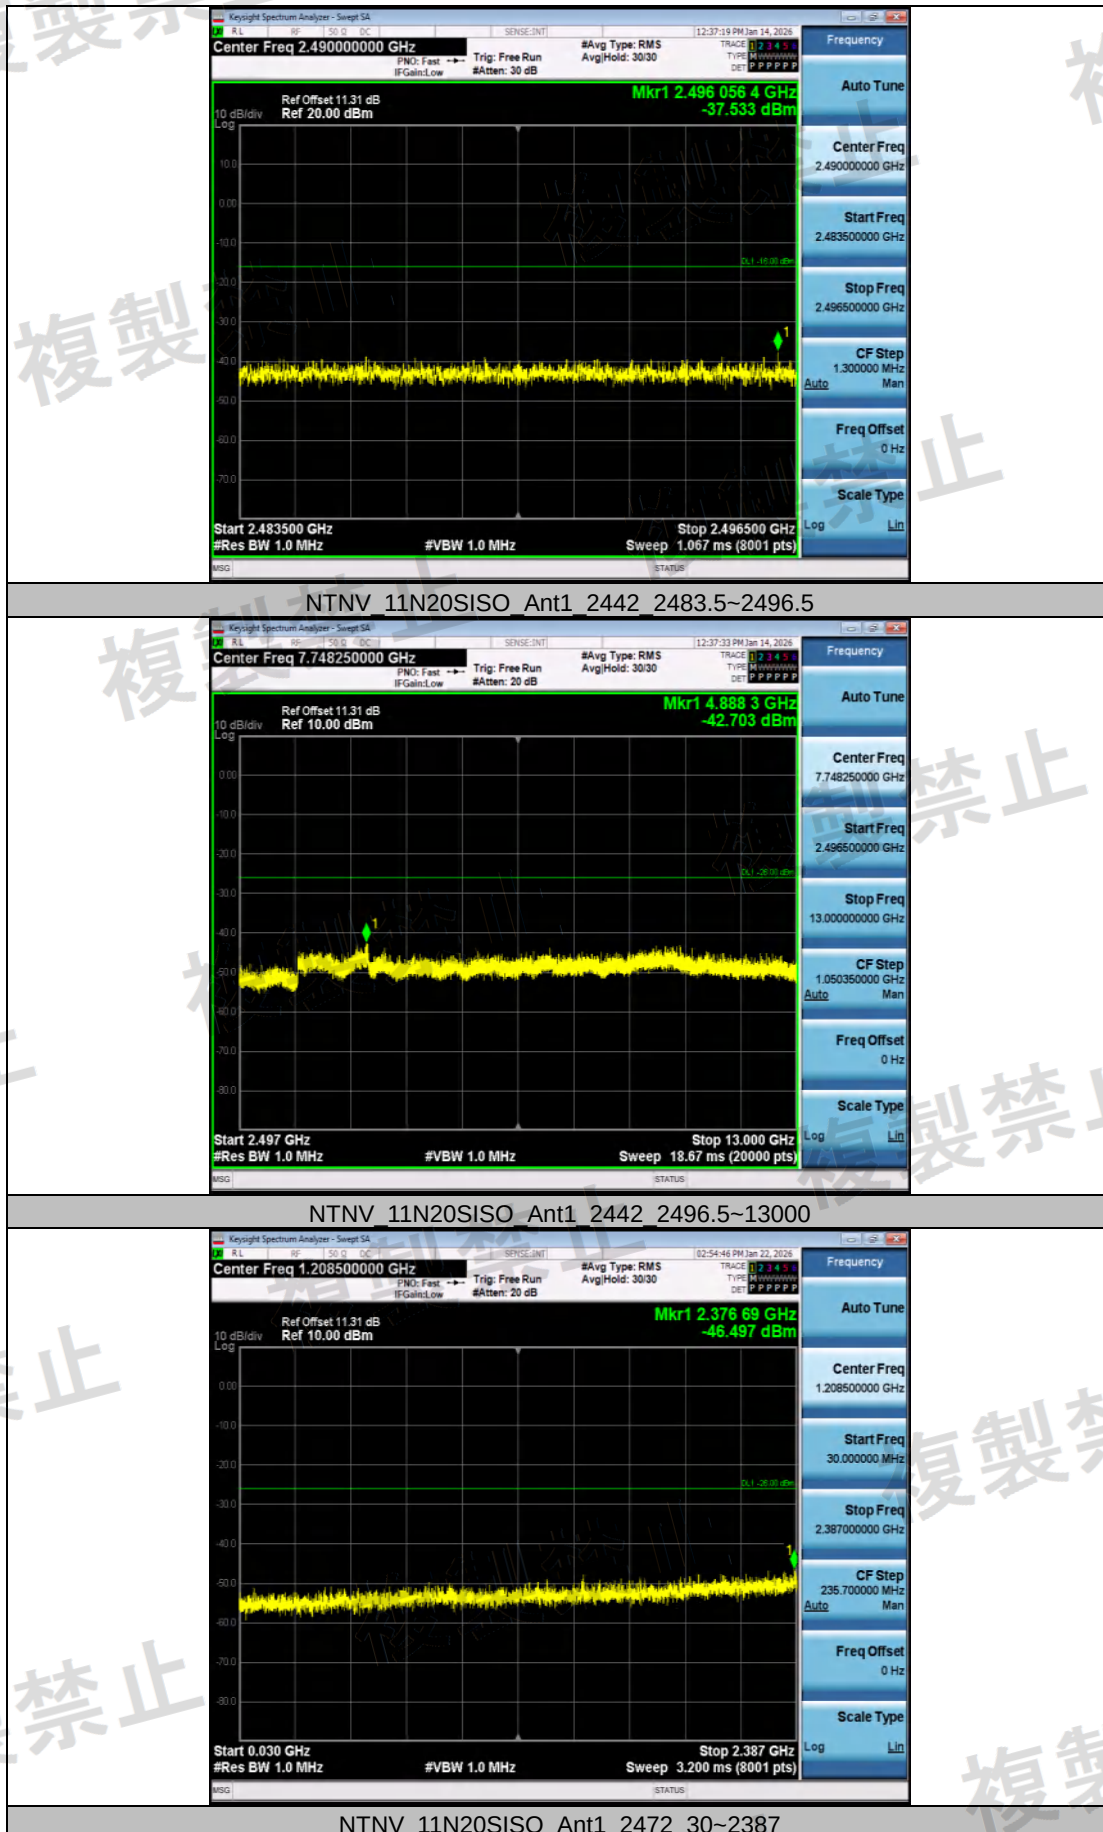


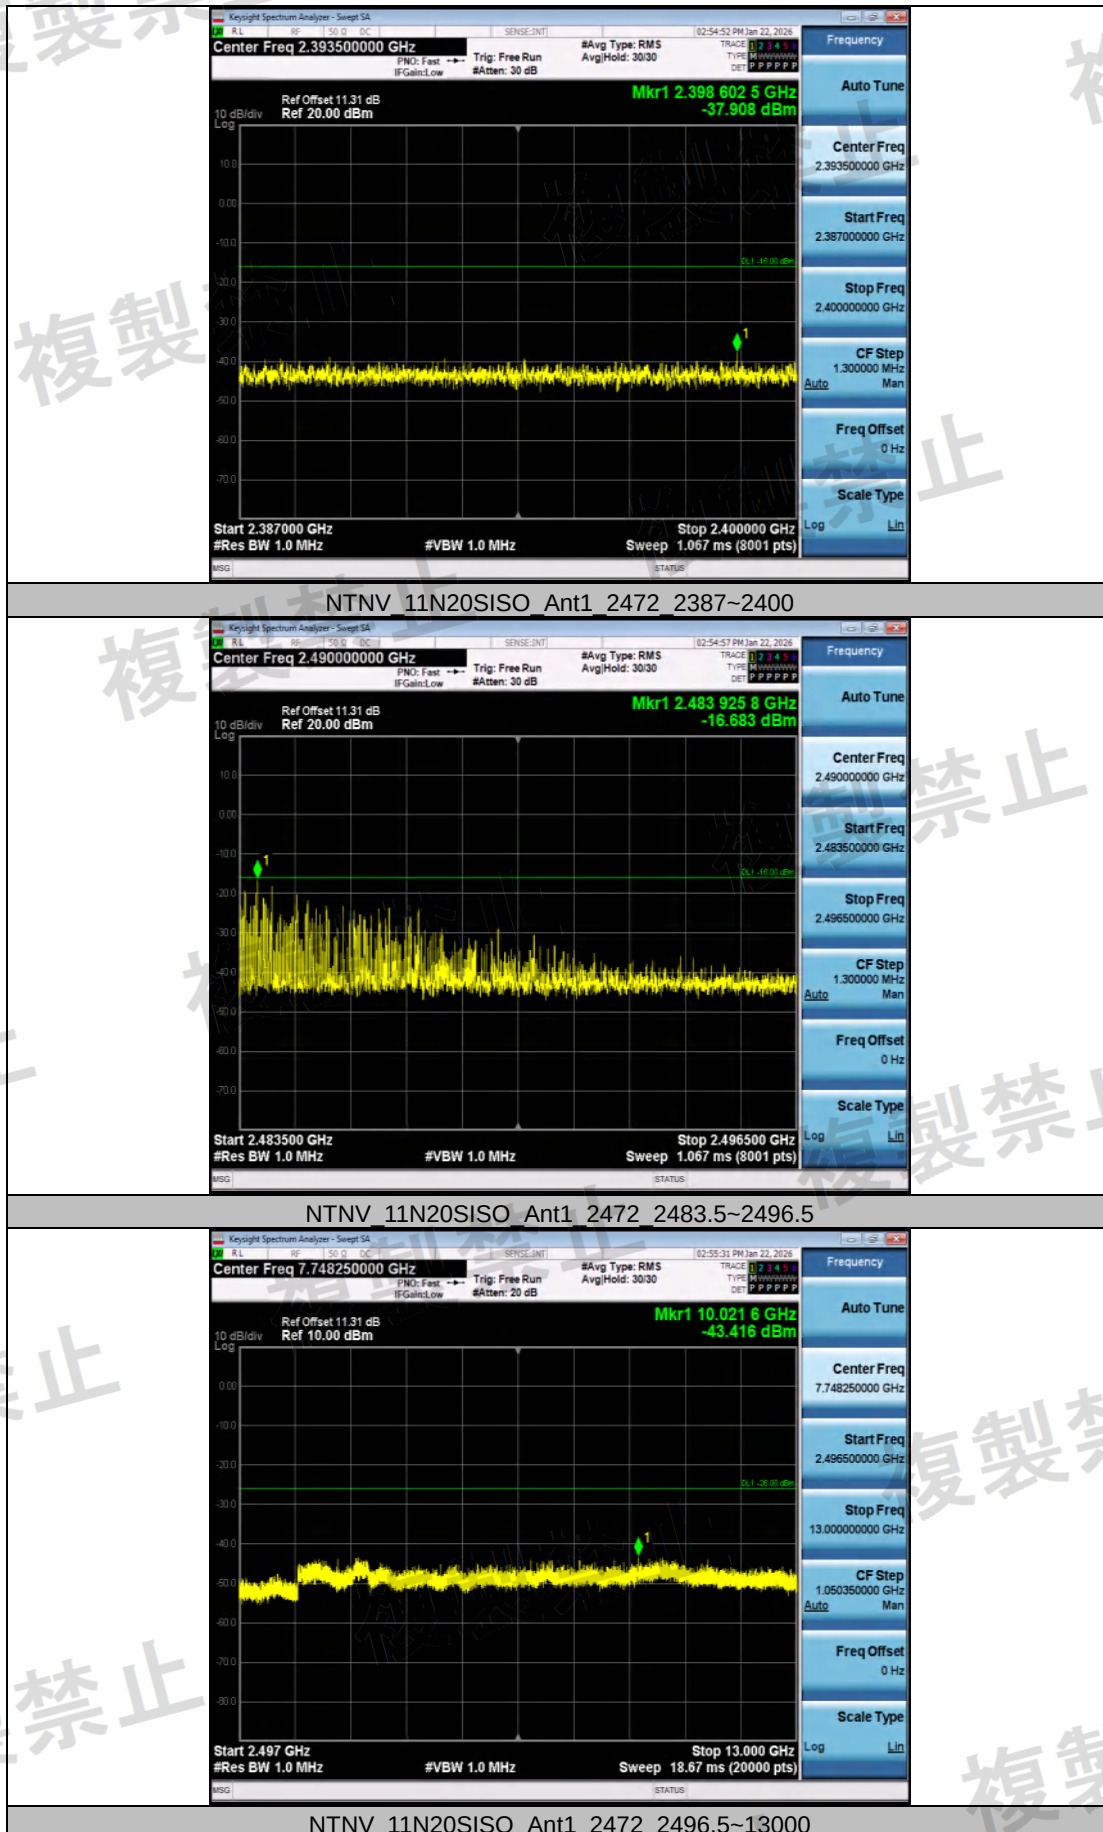


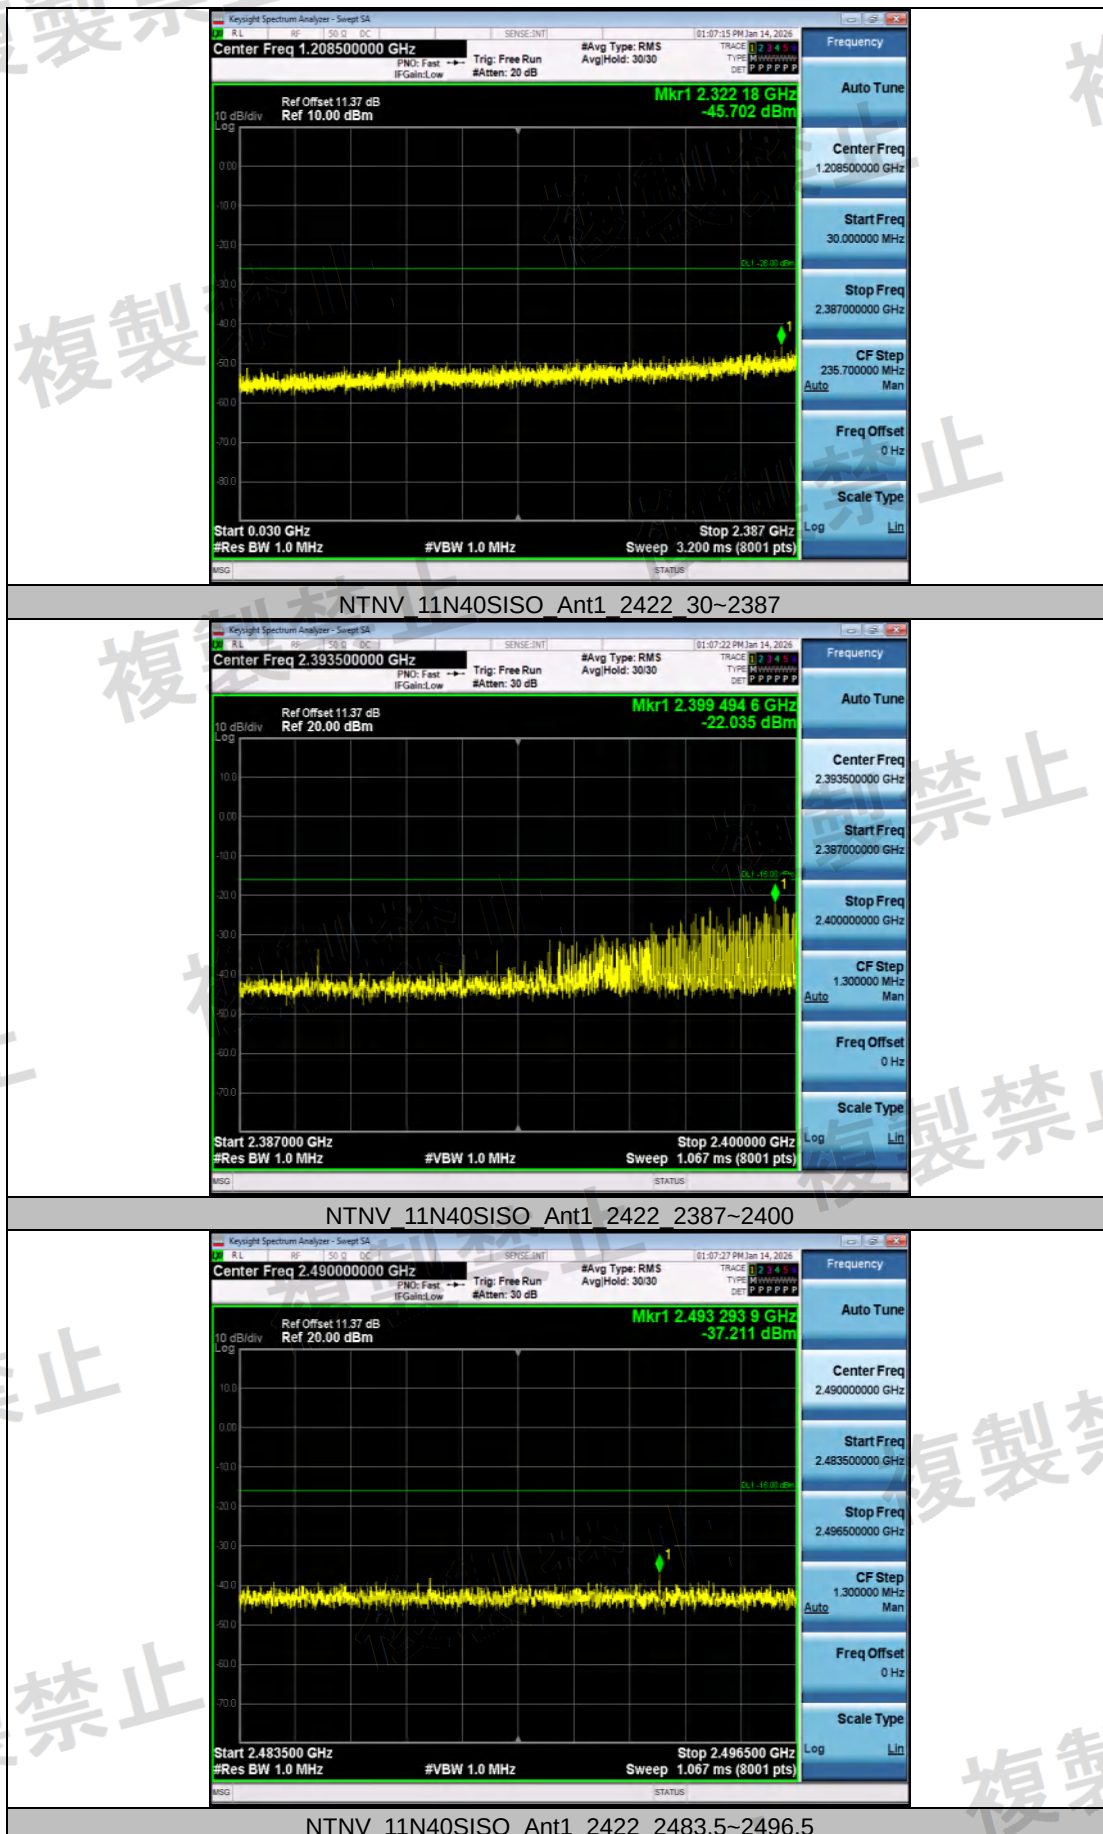


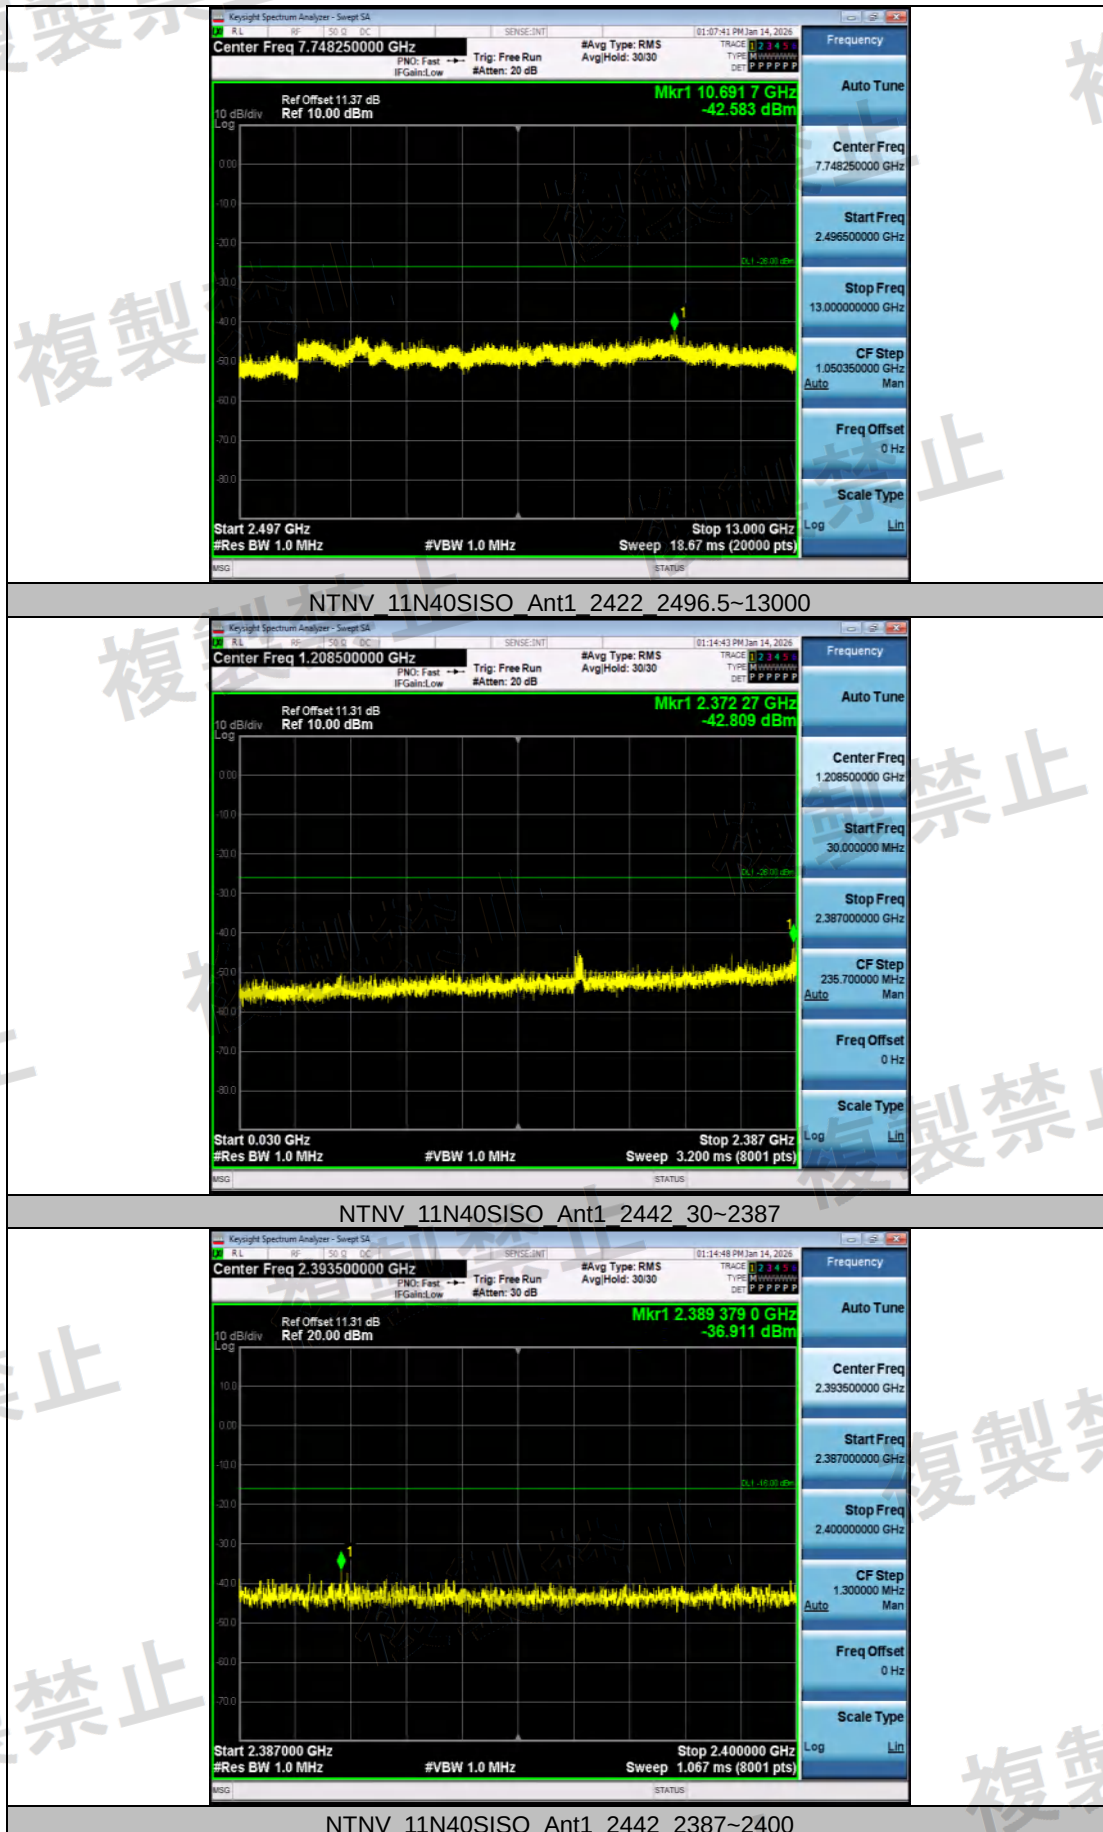


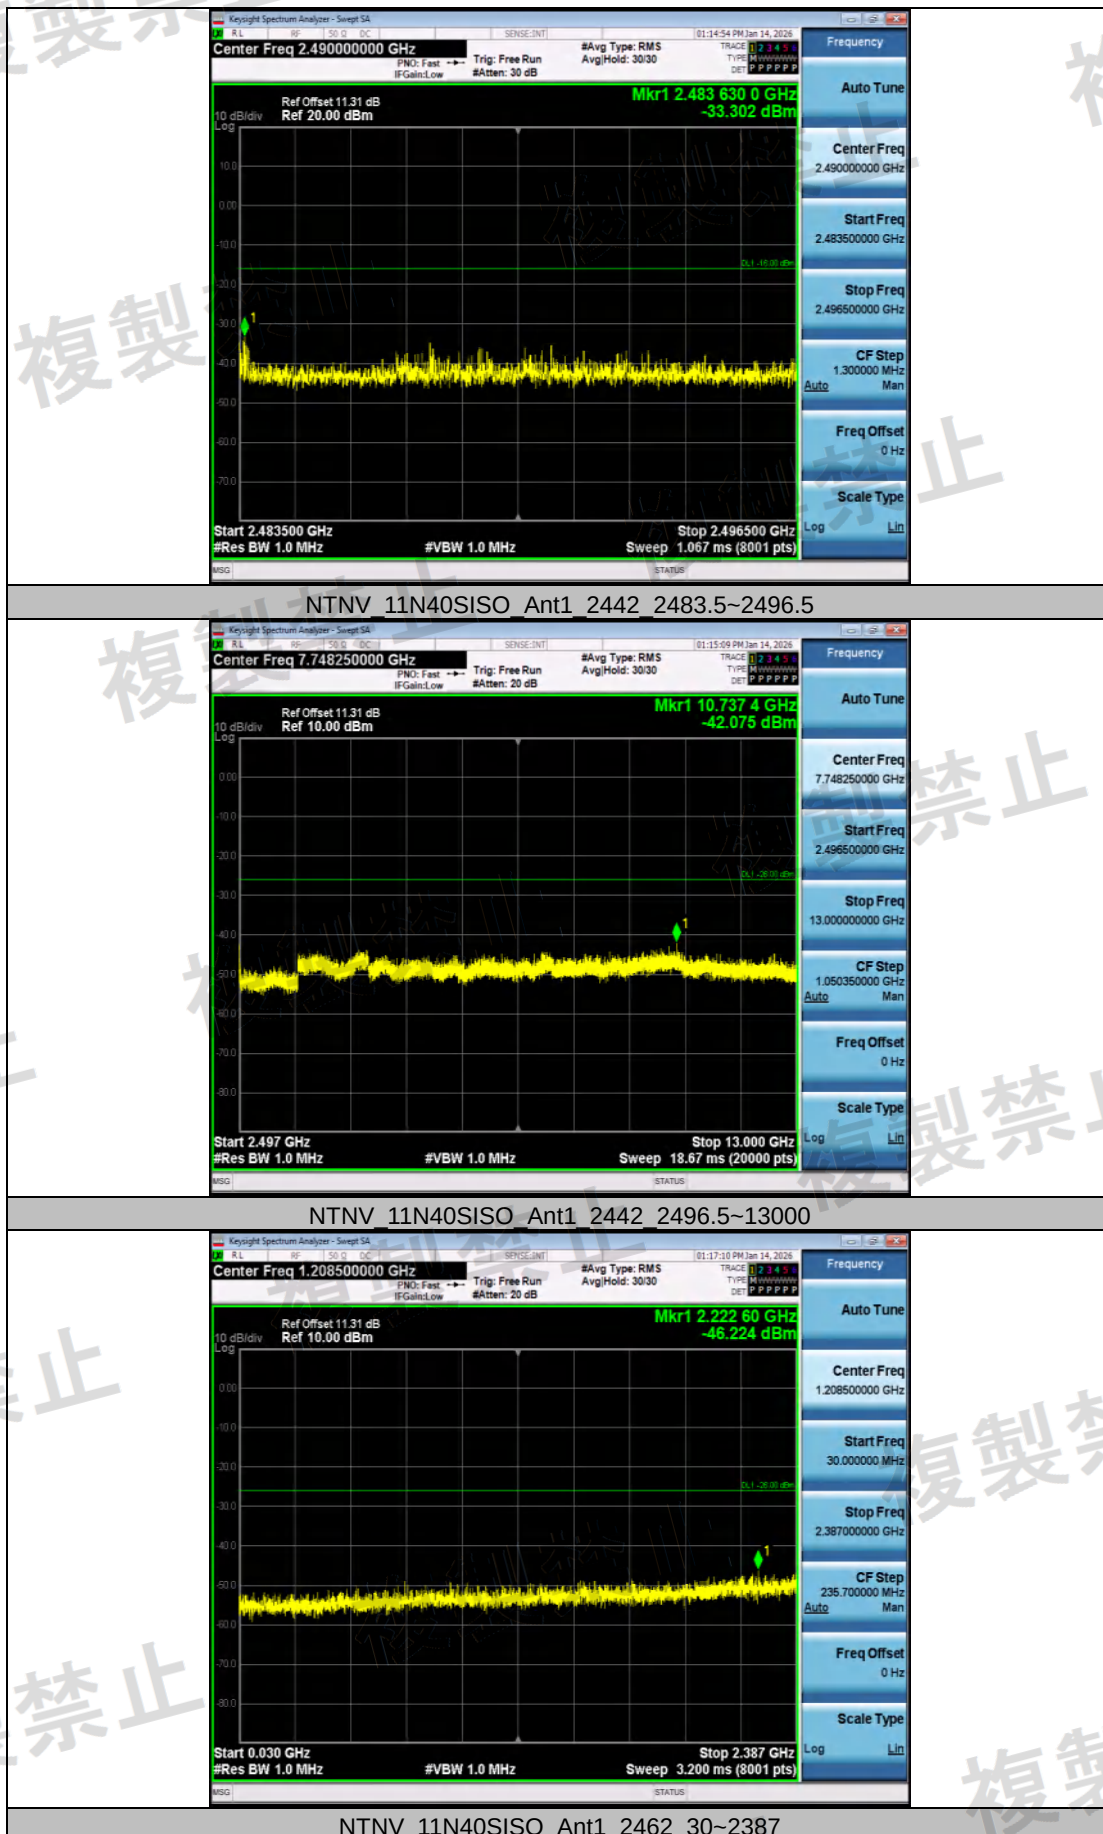


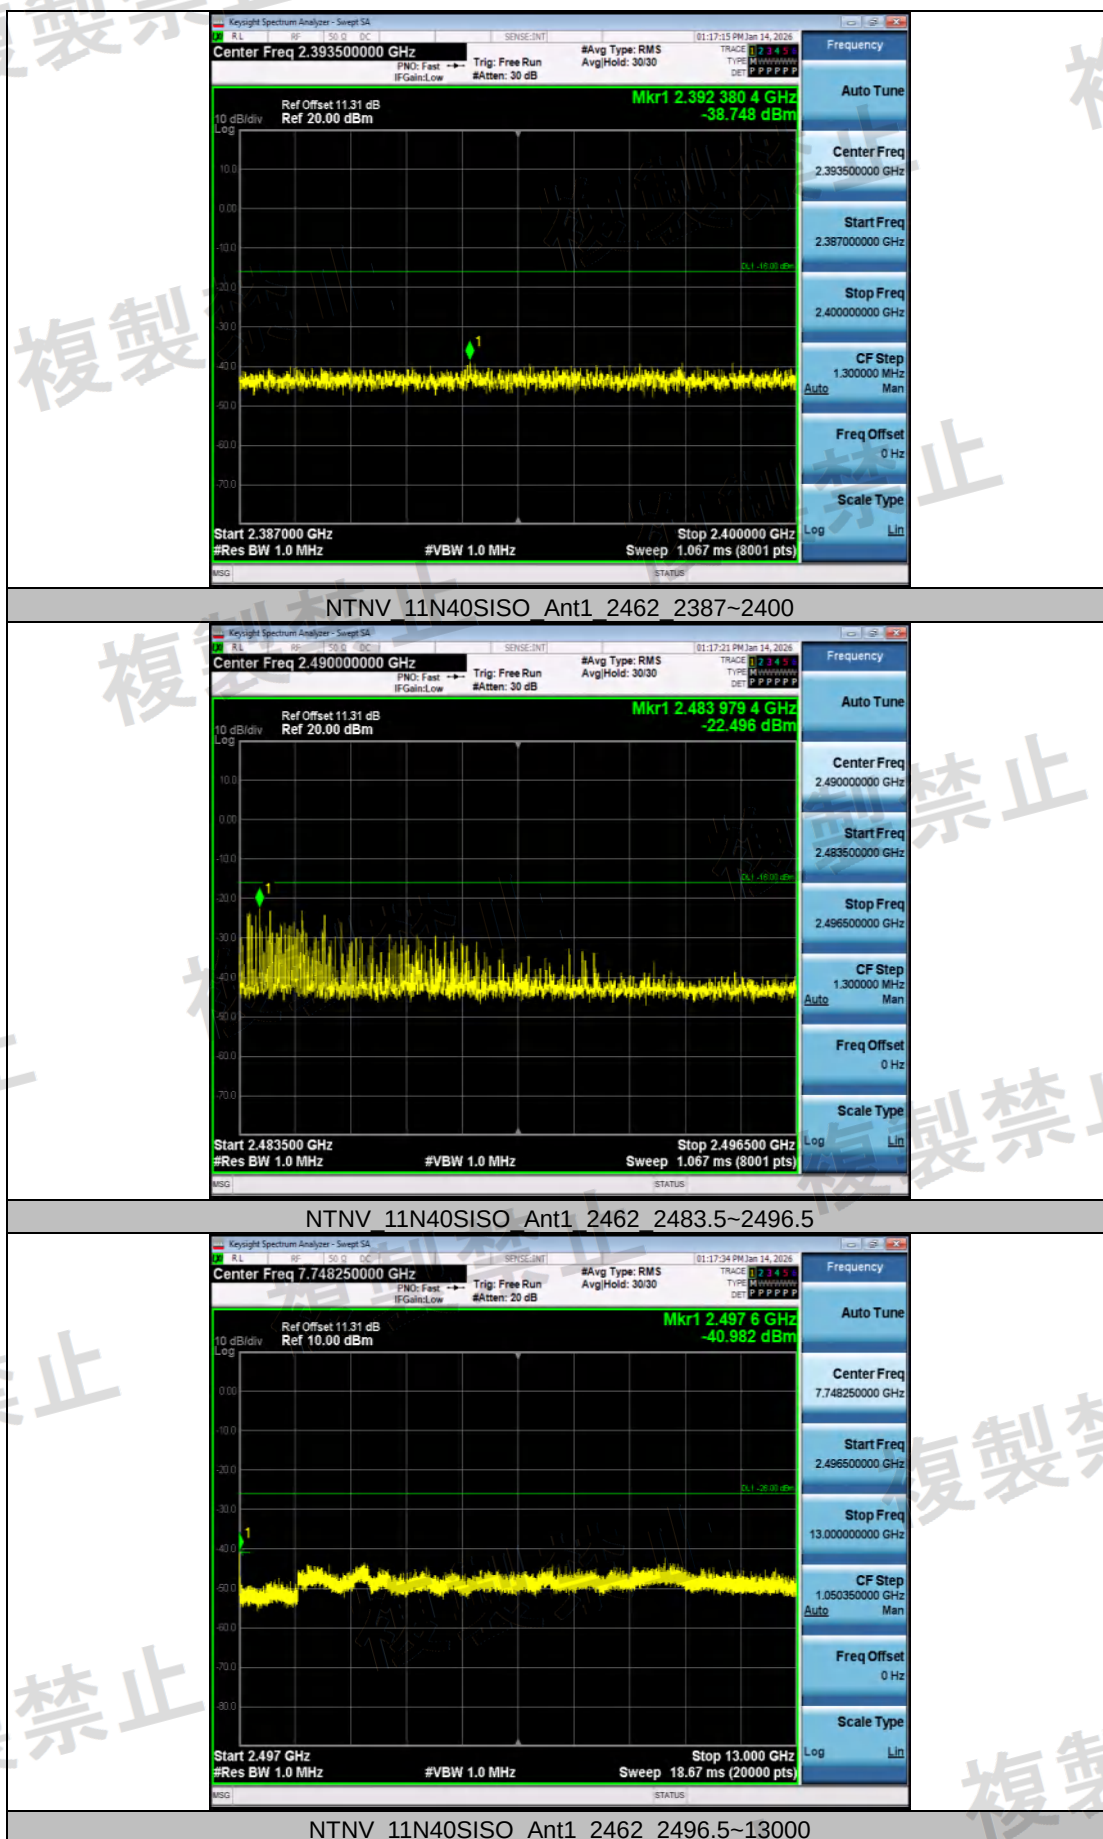


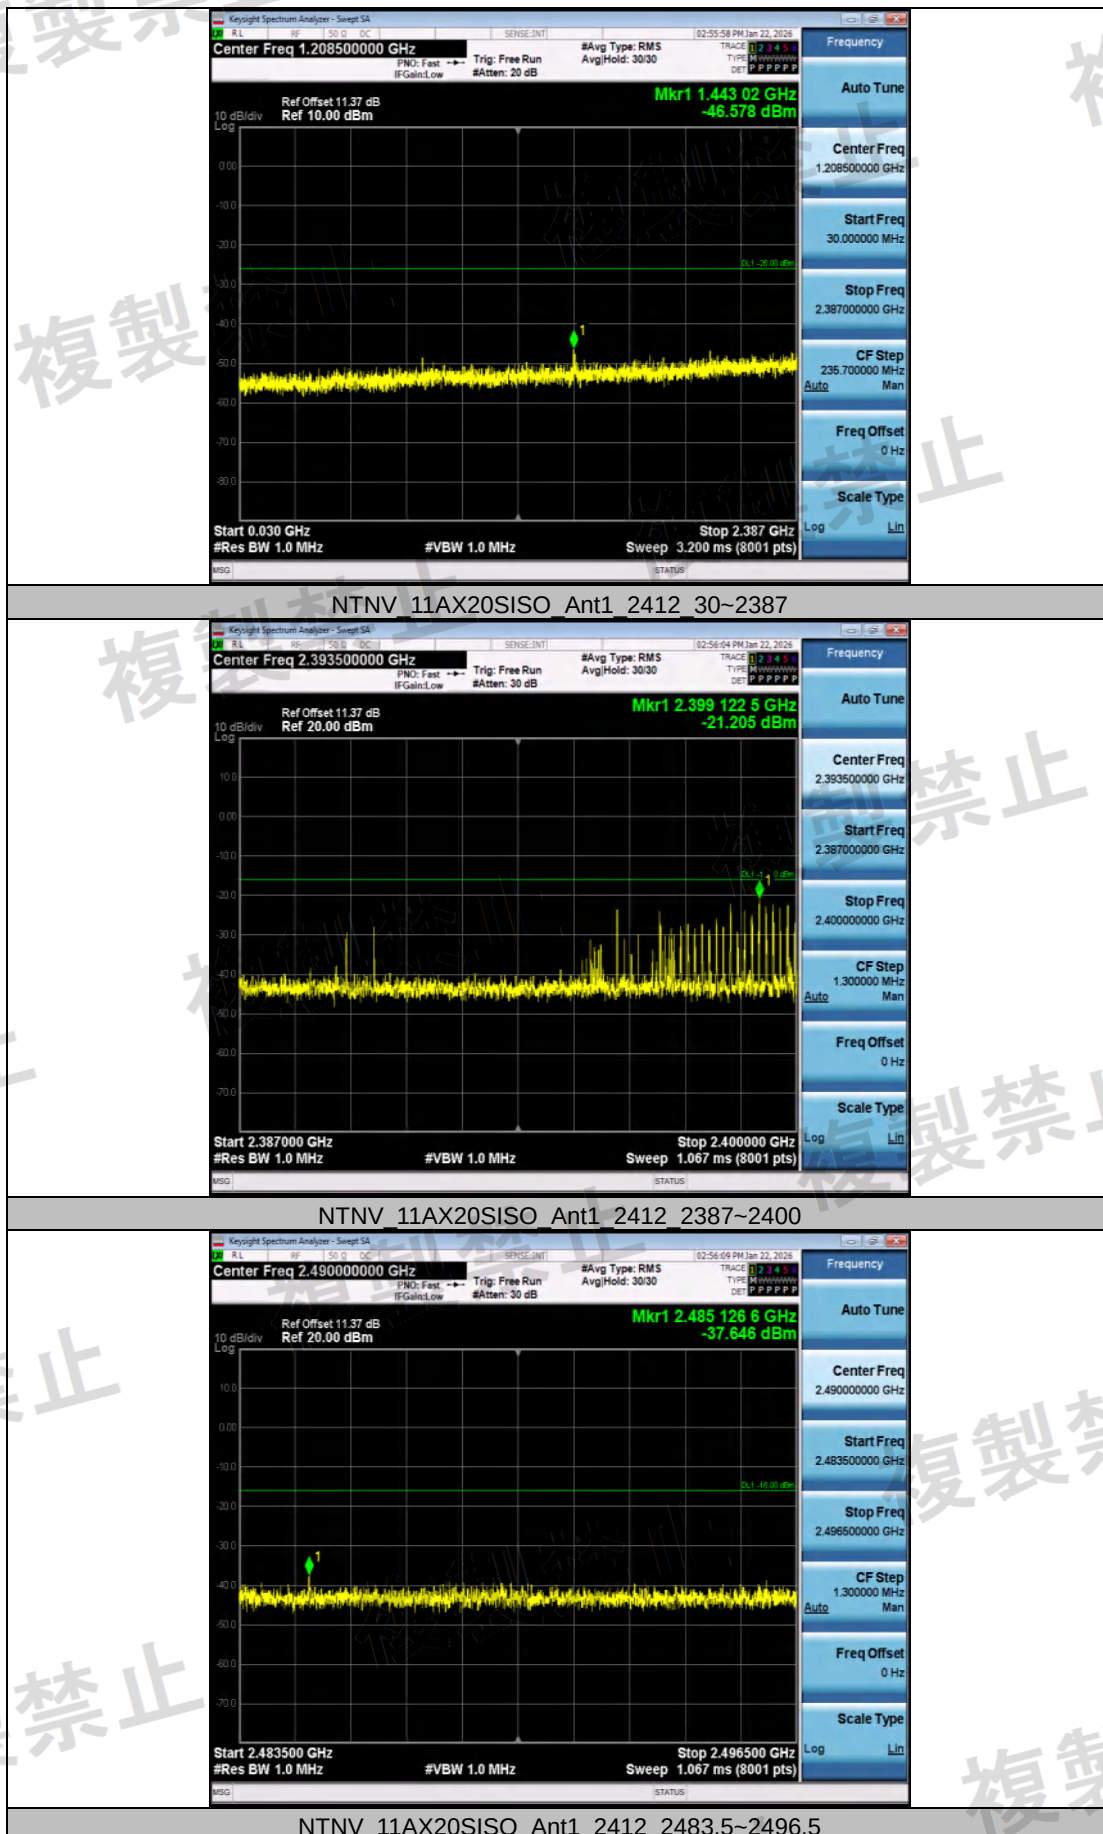


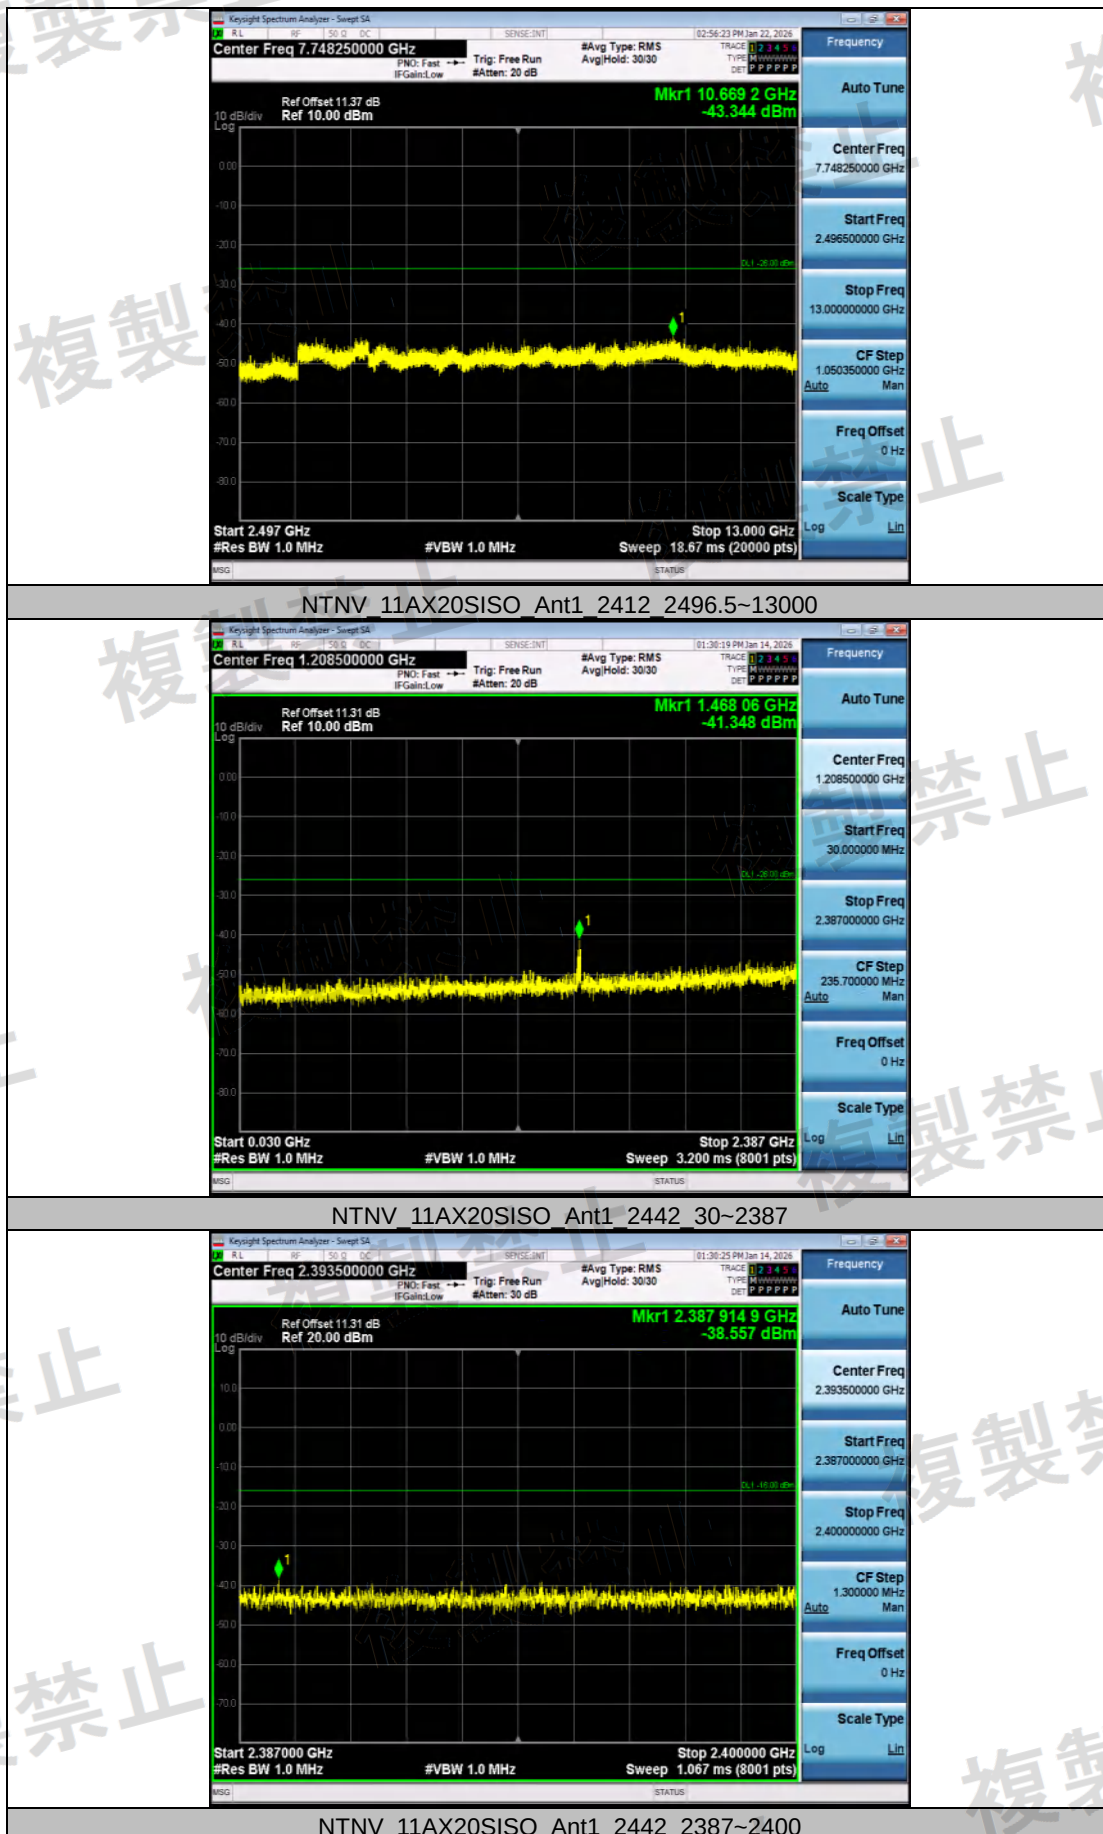


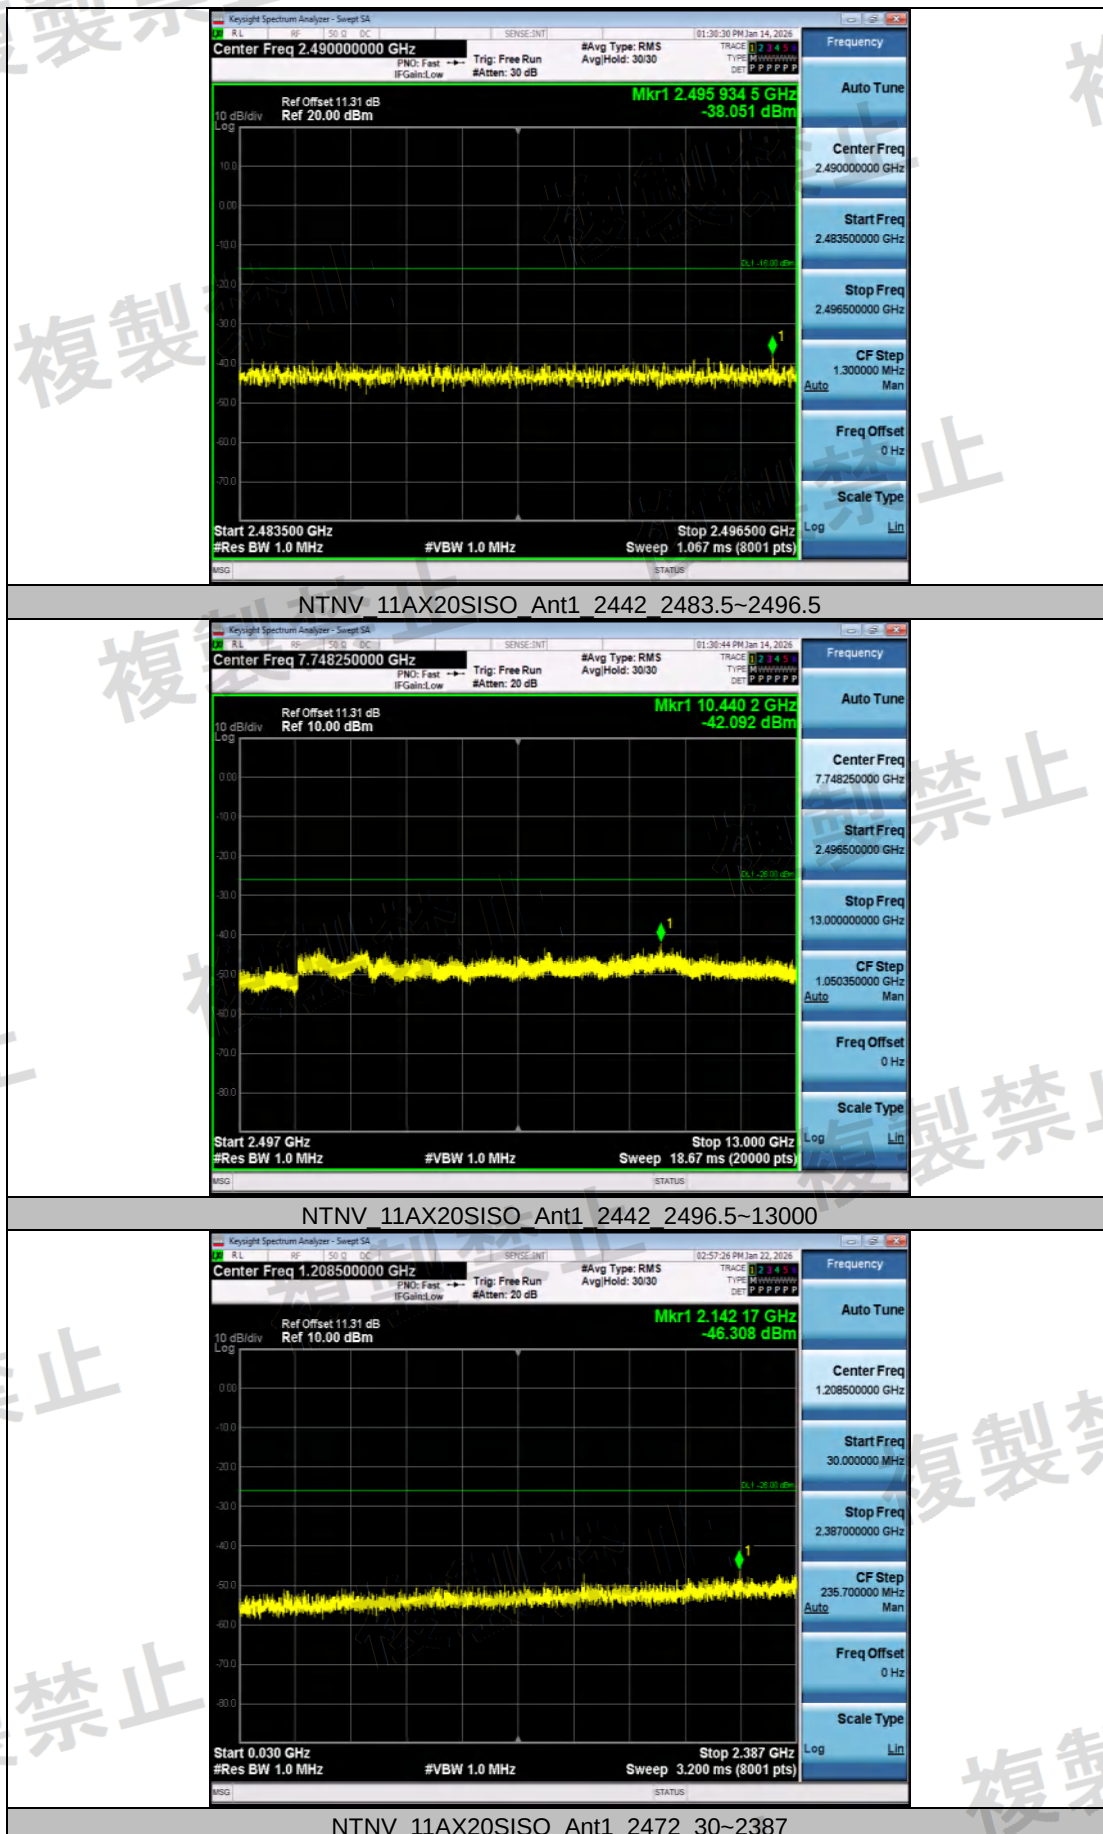


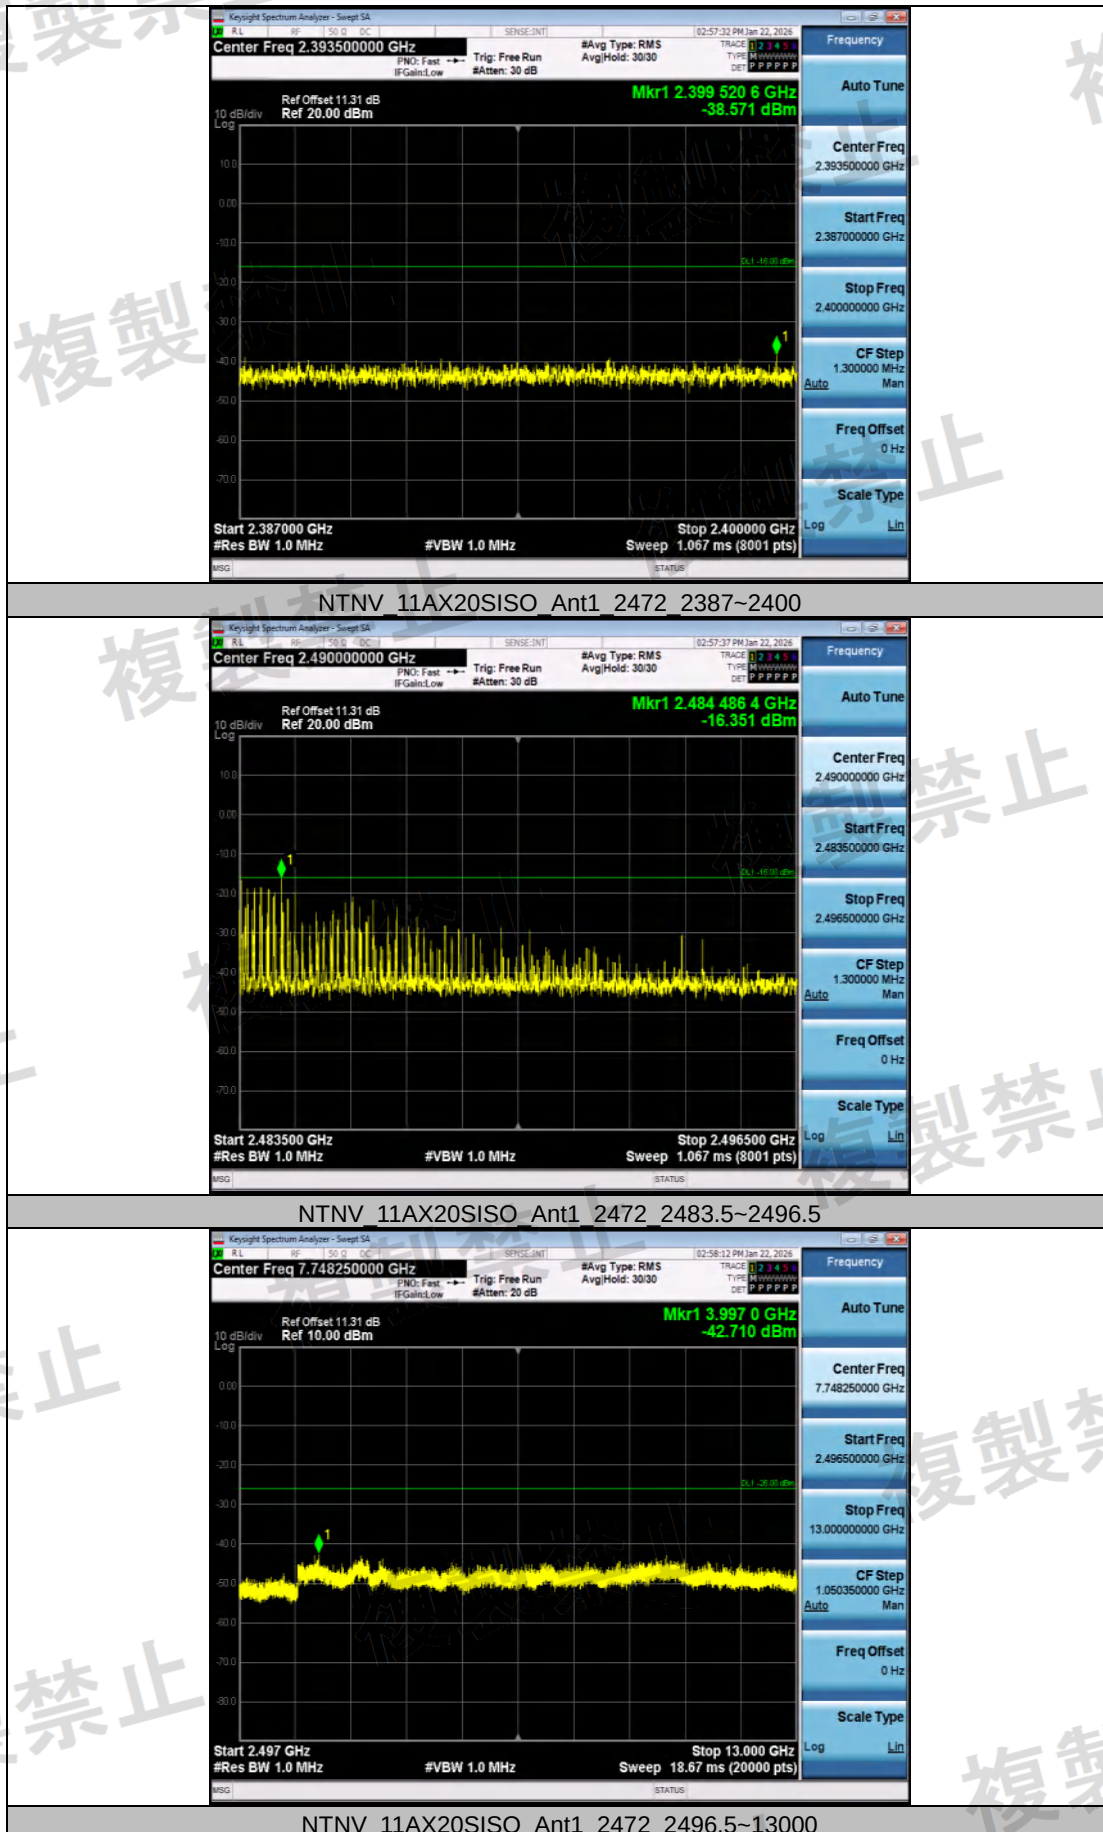

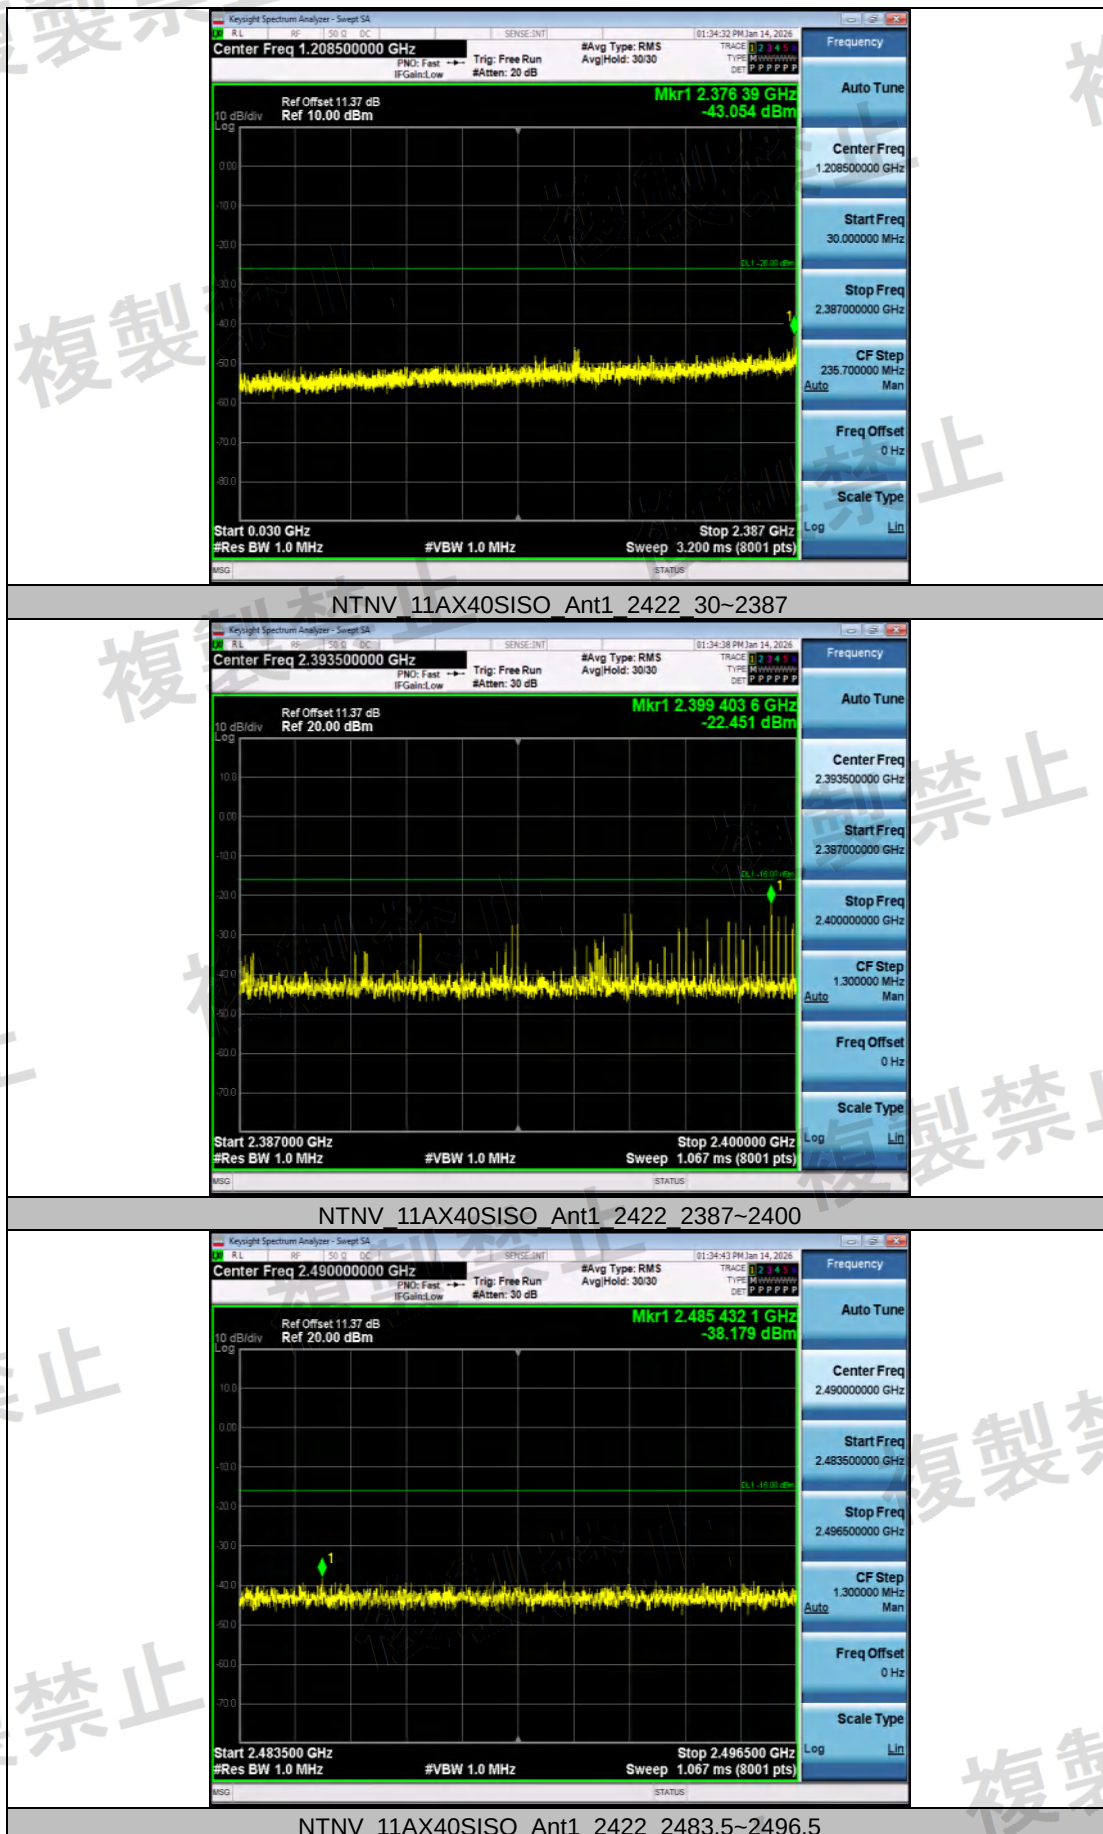


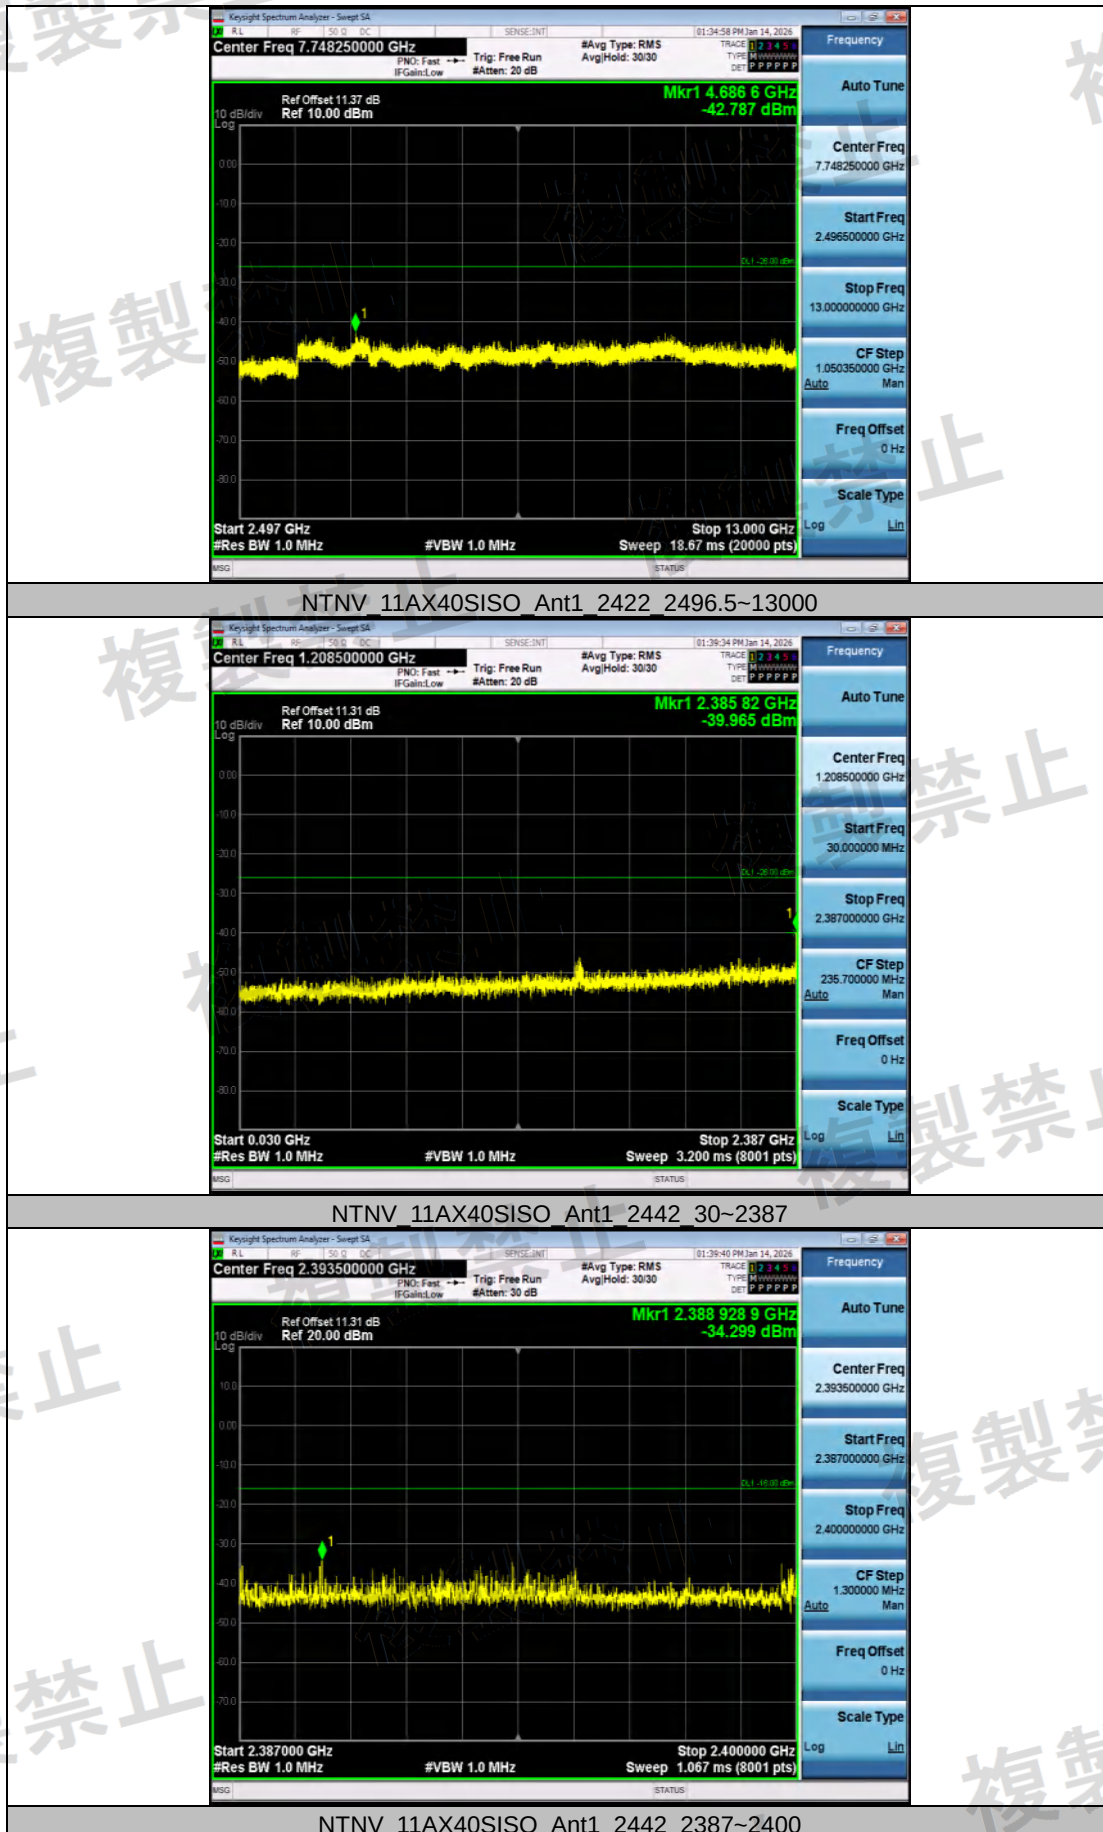


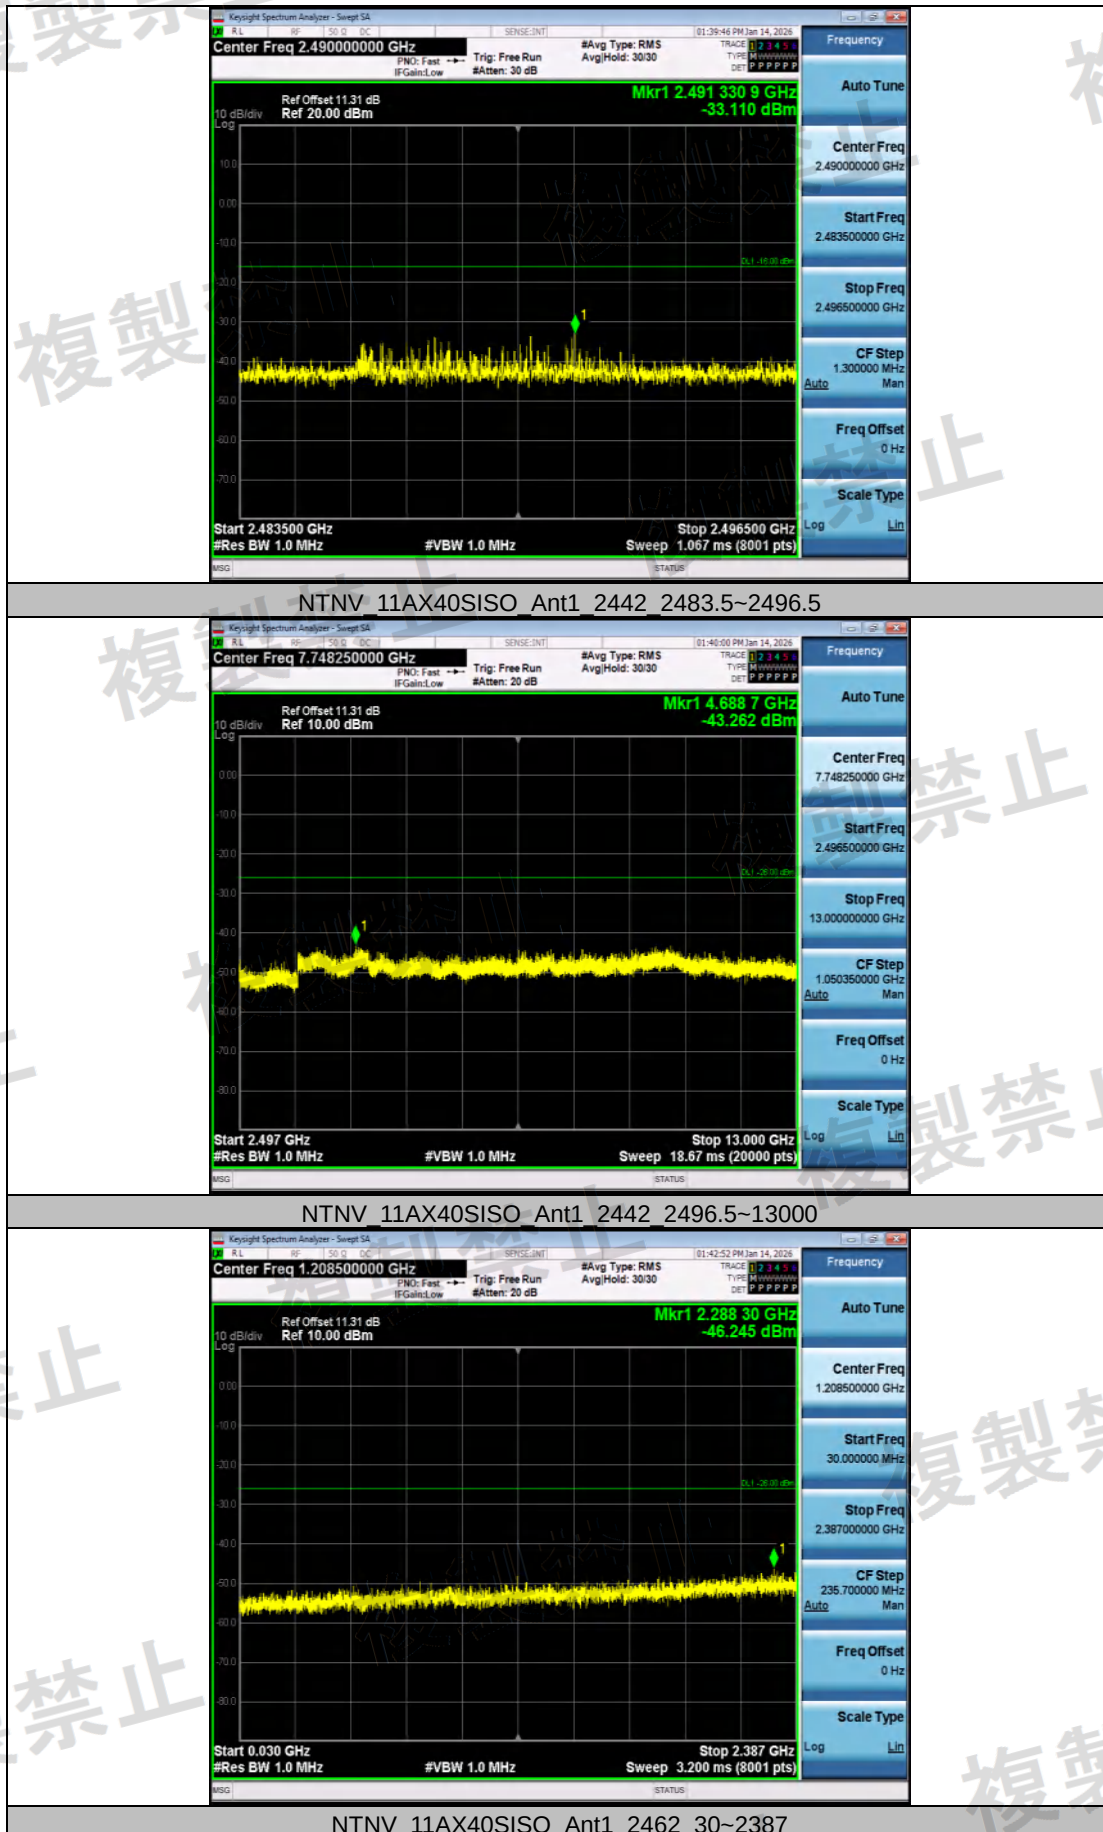


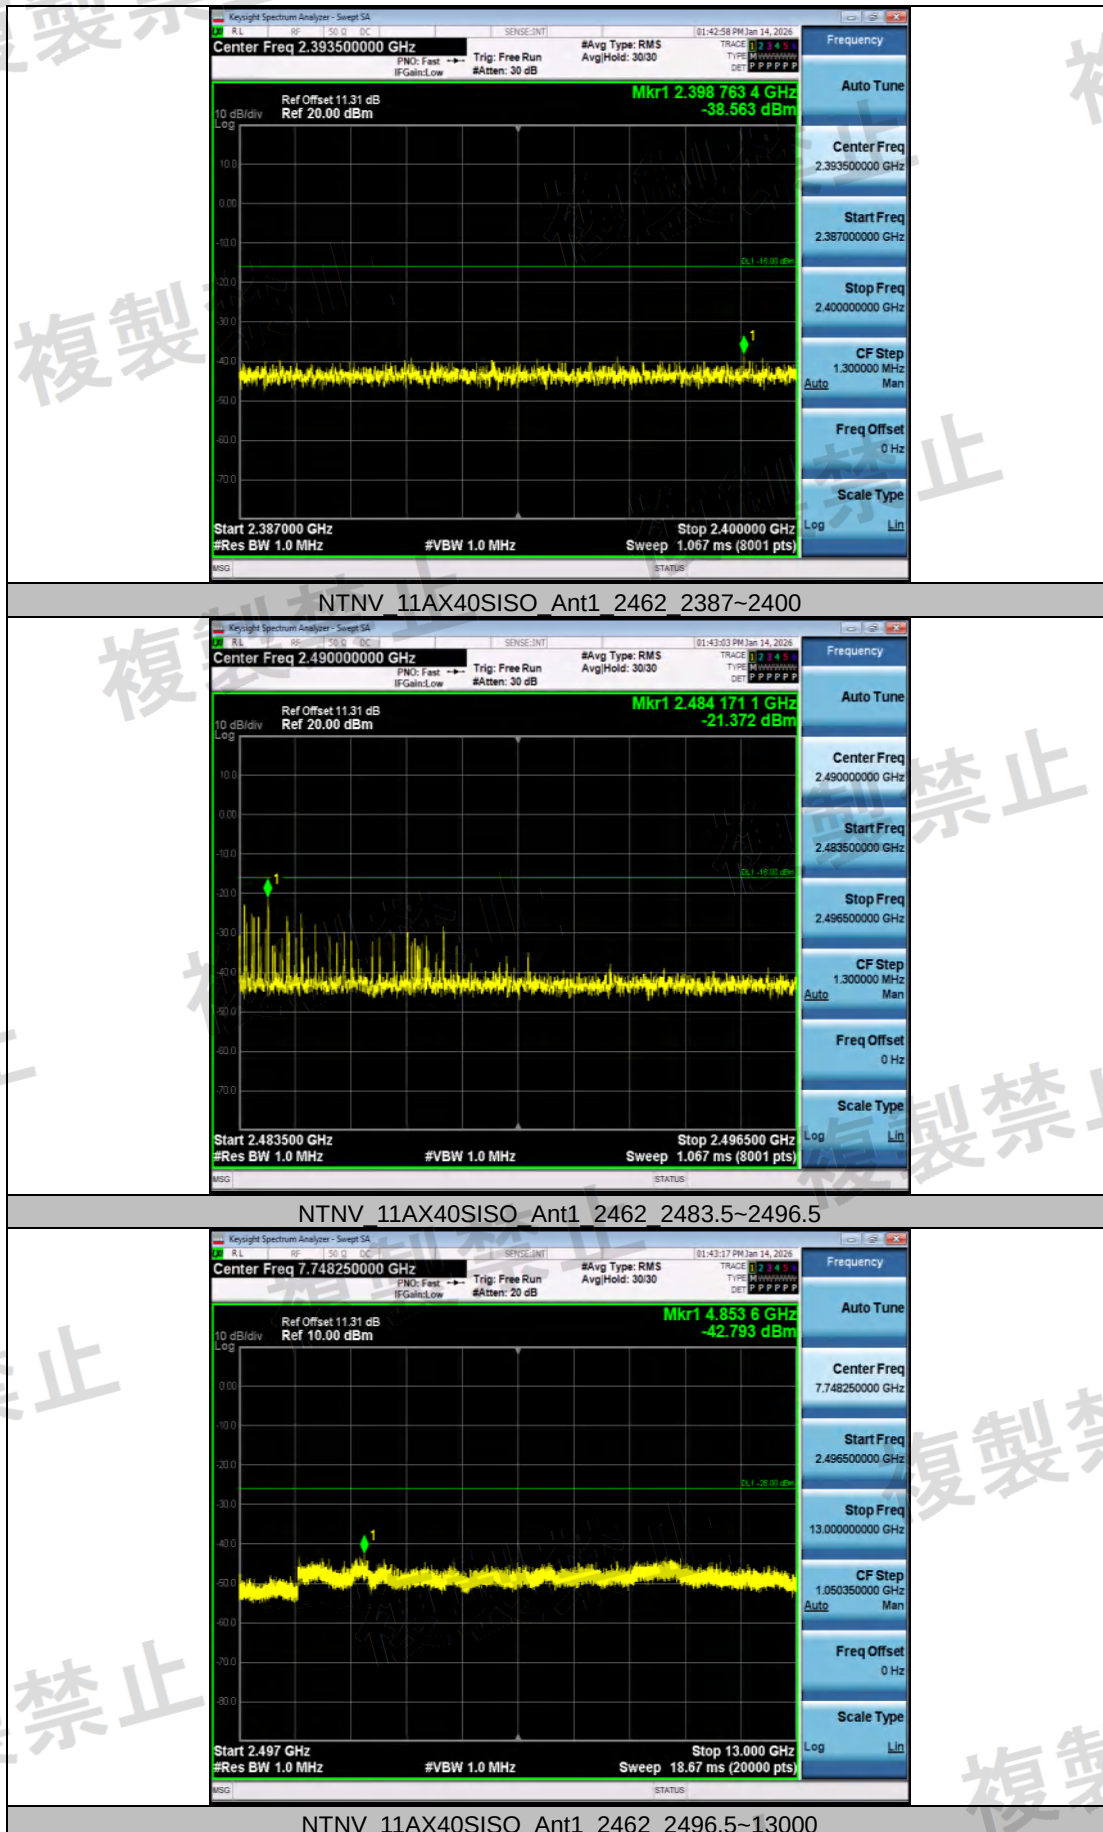

Test Graphs_Step2

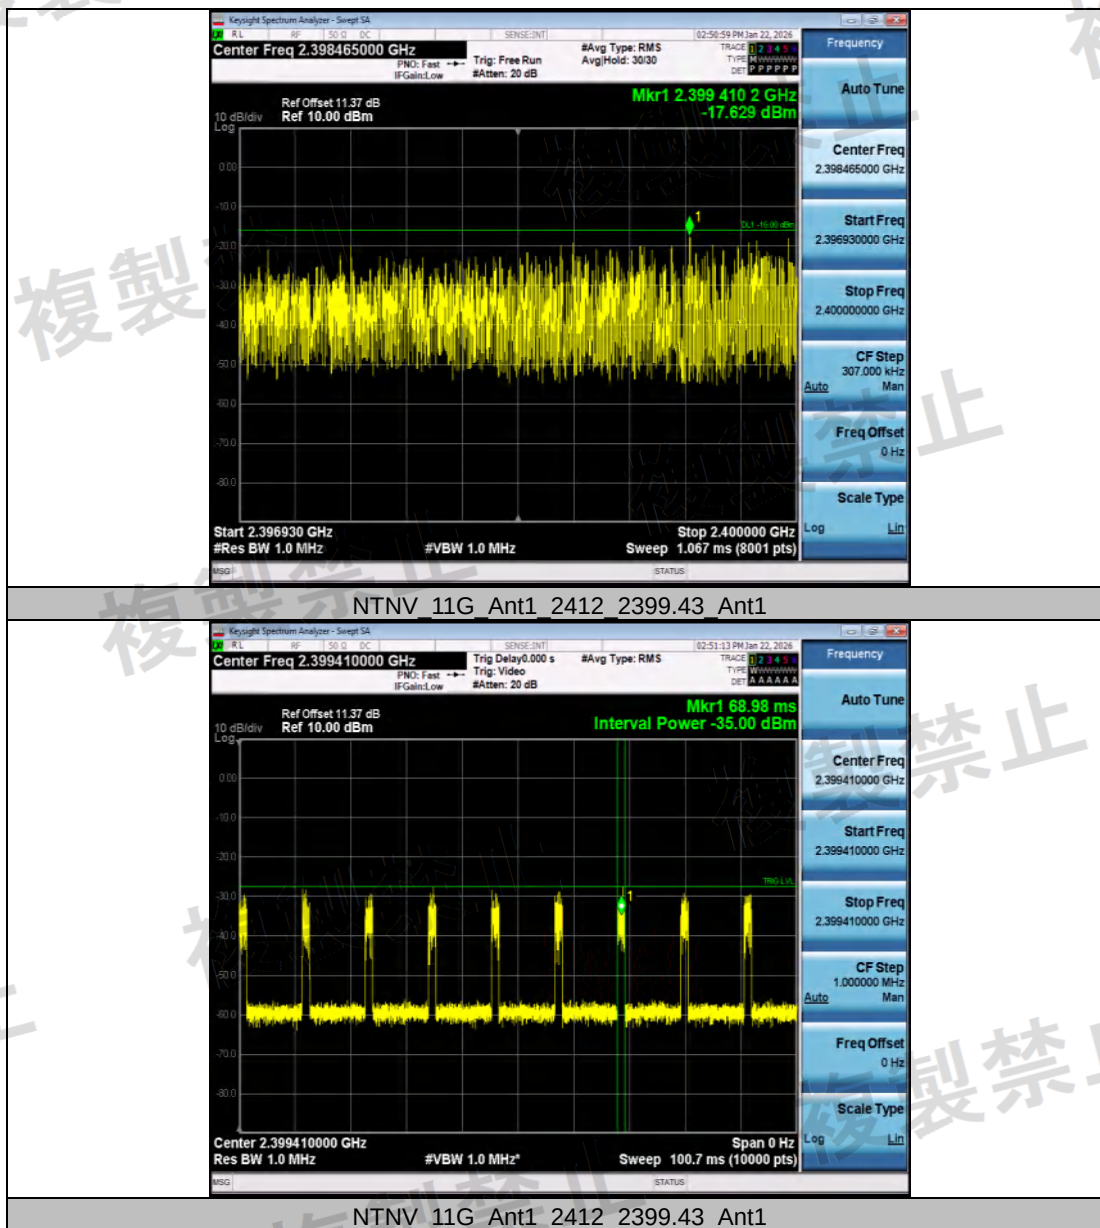

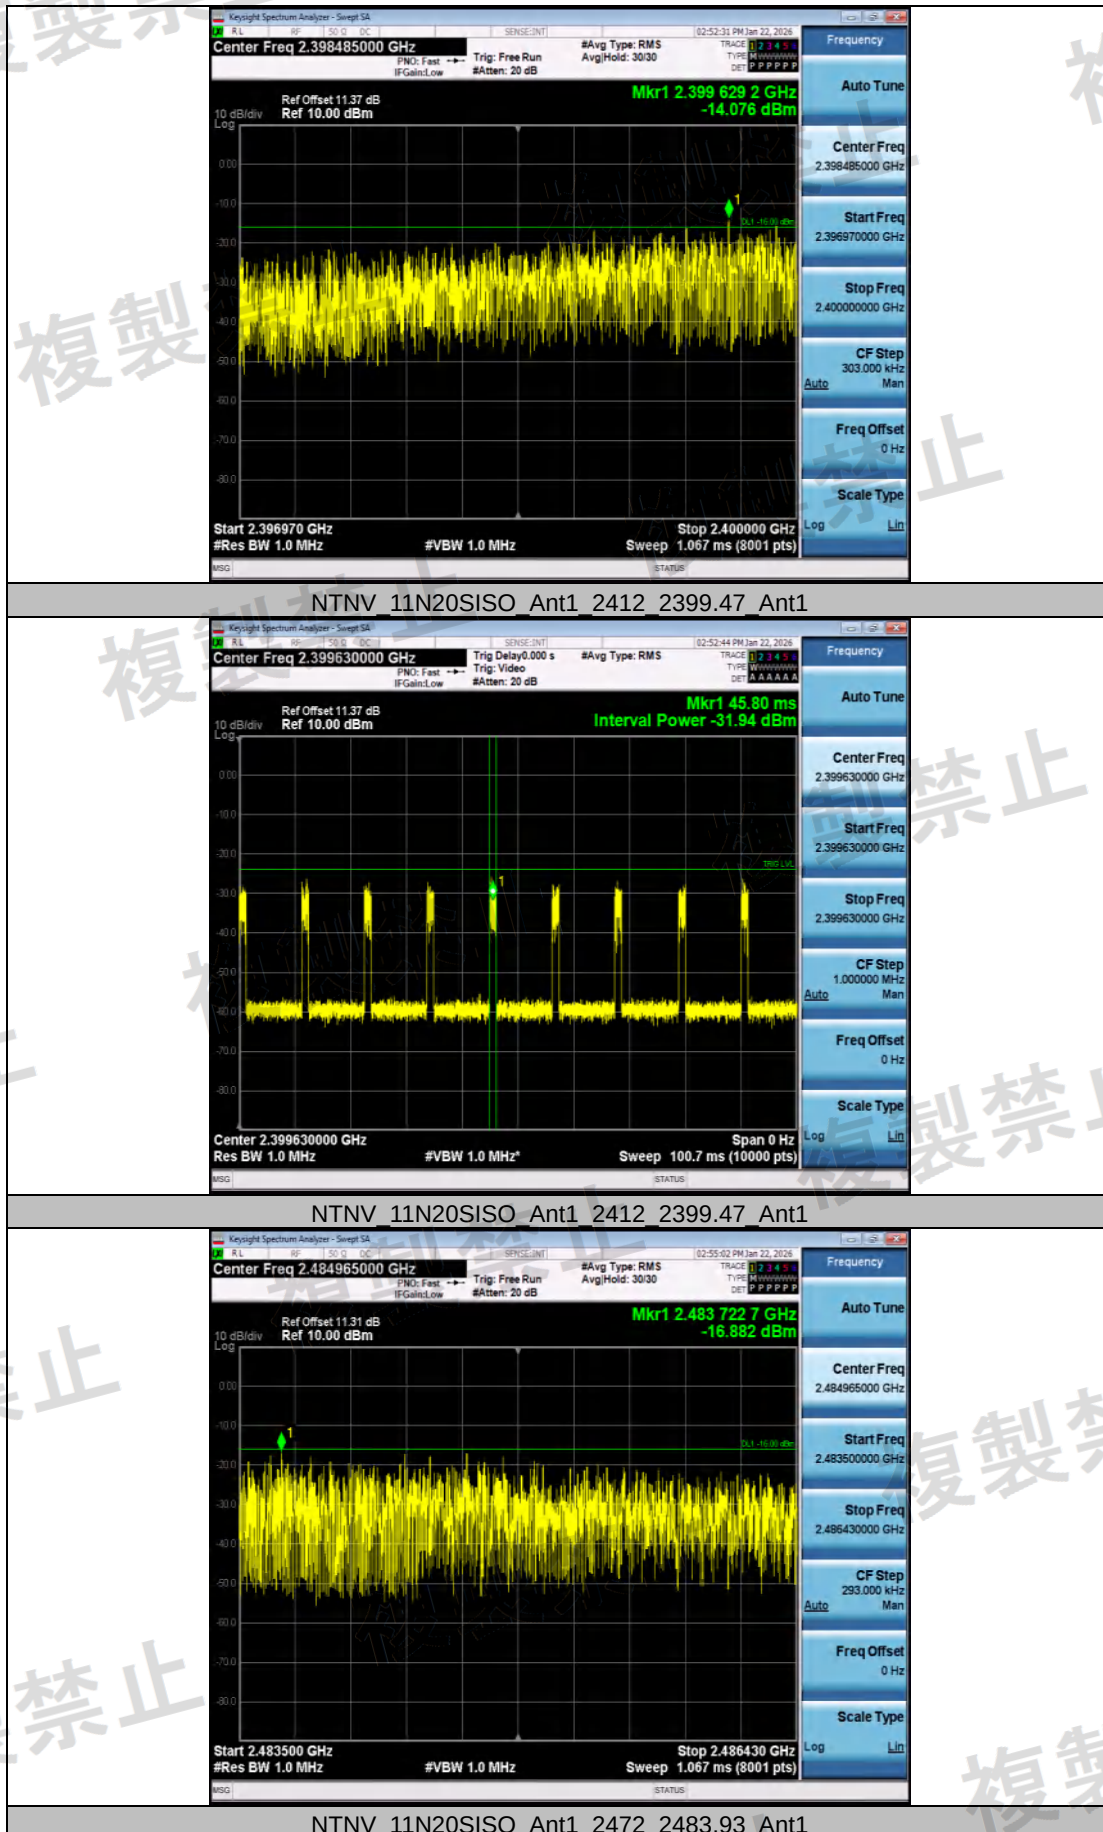

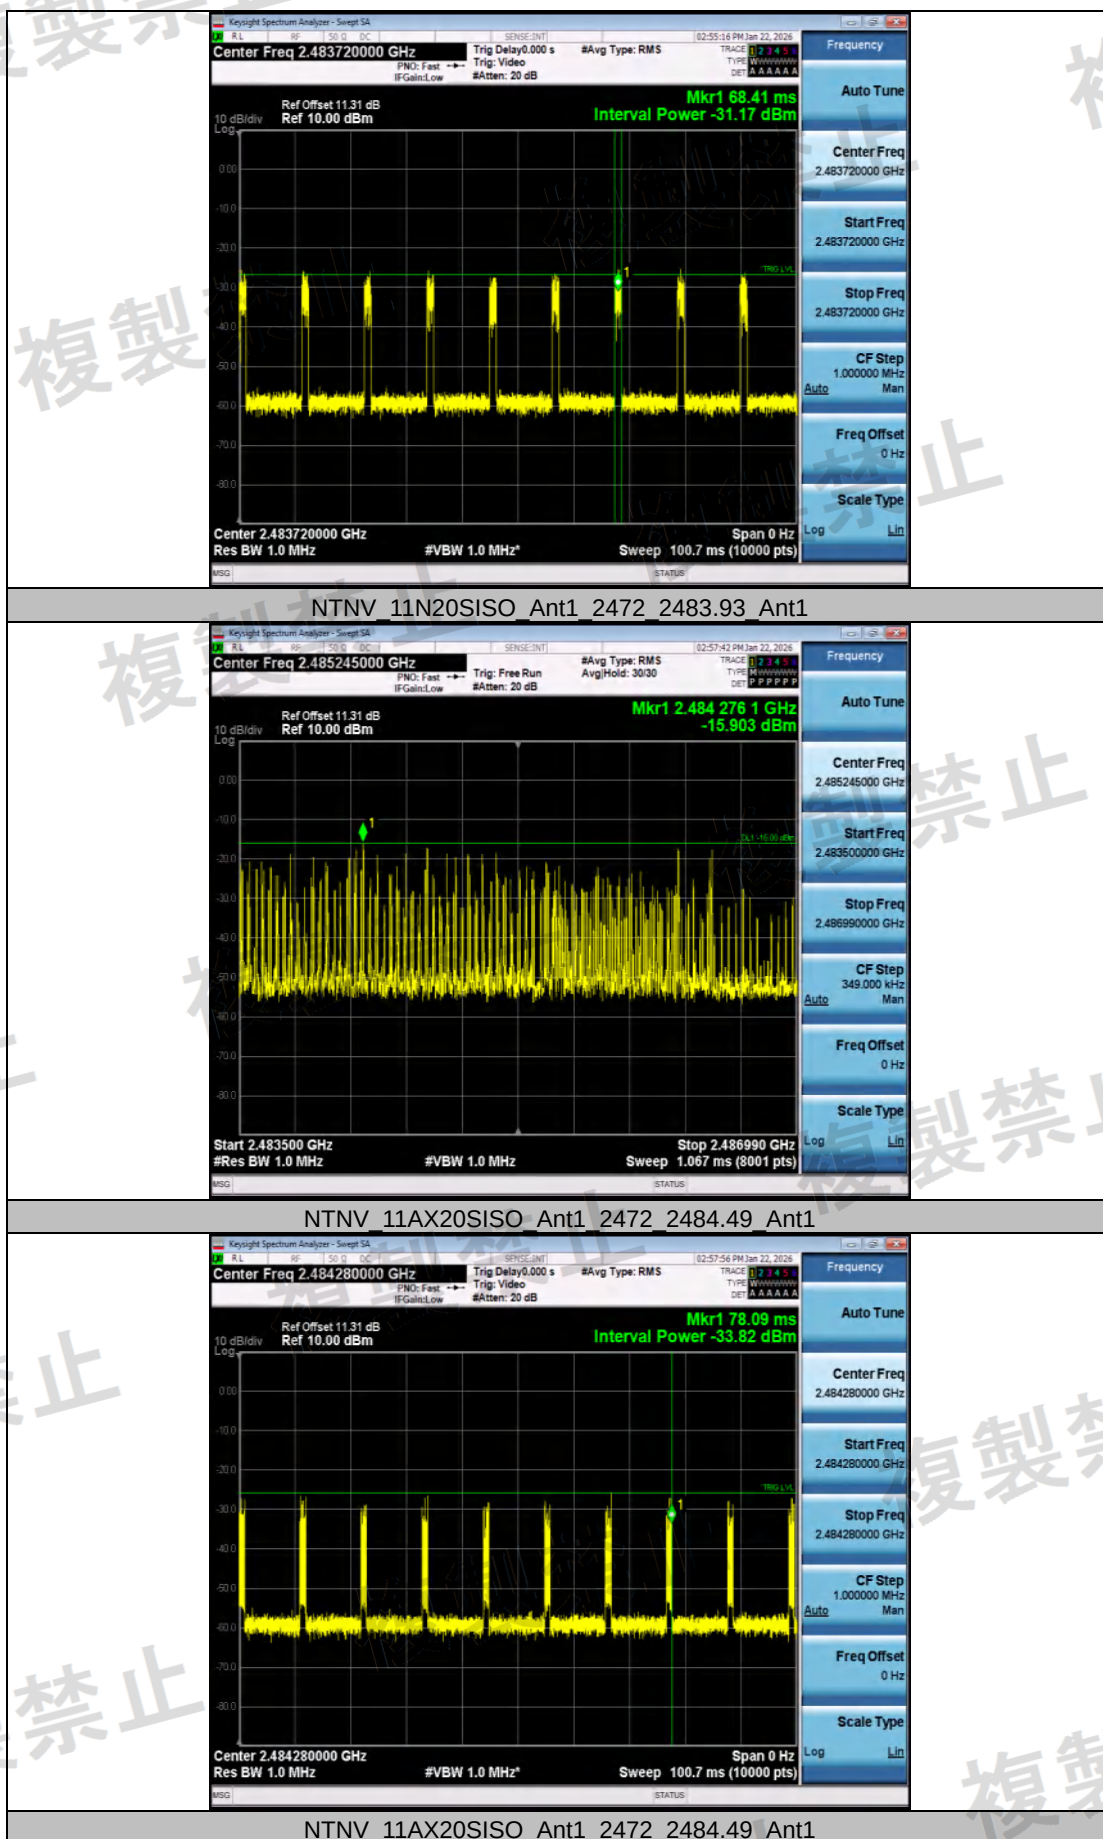

Appendix E: Receiver spurious emissions


Test Result:


TestCondition	TestMode	Antenna	Freq(M Hz)	Freq.Range [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11B	Ant1	2412	30~1000	-67.88	≤-54	0.16293	≤4	PASS
				1000~13000	-63.47	≤-47	0.44978	≤20	PASS
			2442	30~1000	-67.50	≤-54	0.17783	≤4	PASS
				1000~13000	-63.30	≤-47	0.46774	≤20	PASS
			2472	30~1000	-68.74	≤-54	0.13366	≤4	PASS
				1000~13000	-63.61	≤-47	0.43551	≤20	PASS
	11G	Ant1	2412	30~1000	-68.17	≤-54	0.15241	≤4	PASS
				1000~13000	-62.19	≤-47	0.60395	≤20	PASS
			2442	30~1000	-68.59	≤-54	0.13836	≤4	PASS
				1000~13000	-63.16	≤-47	0.48306	≤20	PASS
			2472	30~1000	-68.17	≤-54	0.15241	≤4	PASS
				1000~13000	-63.63	≤-47	0.43351	≤20	PASS
	11N20SI SO	Ant1	2412	30~1000	-68.19	≤-54	0.15171	≤4	PASS
				1000~13000	-62.60	≤-47	0.54954	≤20	PASS
			2442	30~1000	-68.32	≤-54	0.14723	≤4	PASS
				1000~13000	-63.16	≤-47	0.48306	≤20	PASS
			2472	30~1000	-67.44	≤-54	0.18030	≤4	PASS
				1000~13000	-47.01	≤-47	19.9067 3	≤20	See table below
	11N40SI SO	Ant1	2422	30~1000	-68.04	≤-54	0.15704	≤4	PASS
				1000~13000	-63.28	≤-47	0.46989	≤20	PASS
			2442	30~1000	-69.01	≤-54	0.12560	≤4	PASS
				1000~13000	-63.39	≤-47	0.45814	≤20	PASS
			2462	30~1000	-68.66	≤-54	0.13614	≤4	PASS
				1000~13000	-50.17	≤-47	9.61612	≤20	See table below
	11AX20S ISO	Ant1	2412	30~1000	-68.39	≤-54	0.14488	≤4	PASS
				1000~13000	-62.55	≤-47	0.55590	≤20	PASS
			2442	30~1000	-68.05	≤-54	0.15668	≤4	PASS
				1000~13000	-63.46	≤-47	0.45082	≤20	PASS
			2472	30~1000	-68.46	≤-54	0.14256	≤4	PASS
				1000~13000	-63.47	≤-47	0.44978	≤20	PASS
	11AX40S ISO	Ant1	2422	30~1000	-68.49	≤-54	0.14158	≤4	PASS
				1000~13000	-63.60	≤-47	0.43652	≤20	PASS
			2442	30~1000	-67.48	≤-54	0.17865	≤4	PASS
				1000~13000	-63.00	≤-47	0.50119	≤20	PASS
			2462	30~1000	-68.42	≤-54	0.14388	≤4	PASS
				1000~13000	-63.36	≤-47	0.46132	≤20	PASS


Test Result Step2


TestCondition	TestMode	PreScan In Ant	Channel	Ant	Freq. [MHz]	Result [dBm/ MHz]	Limit [dBm/ MHz]	Result [nW/MHz]	Limit [nW/M Hz]	Verdict
NTNV	11N20SI SO	Ant1	2472	Ant1	3390.73	-79.28	≤-47	0.01180	≤20	PASS


11N40SI SO	Ant1	2462	Ant1	3396.71	-79.37	≤-47	0.01156	≤20	PASS
---------------	------	------	------	---------	--------	------	---------	-----	------

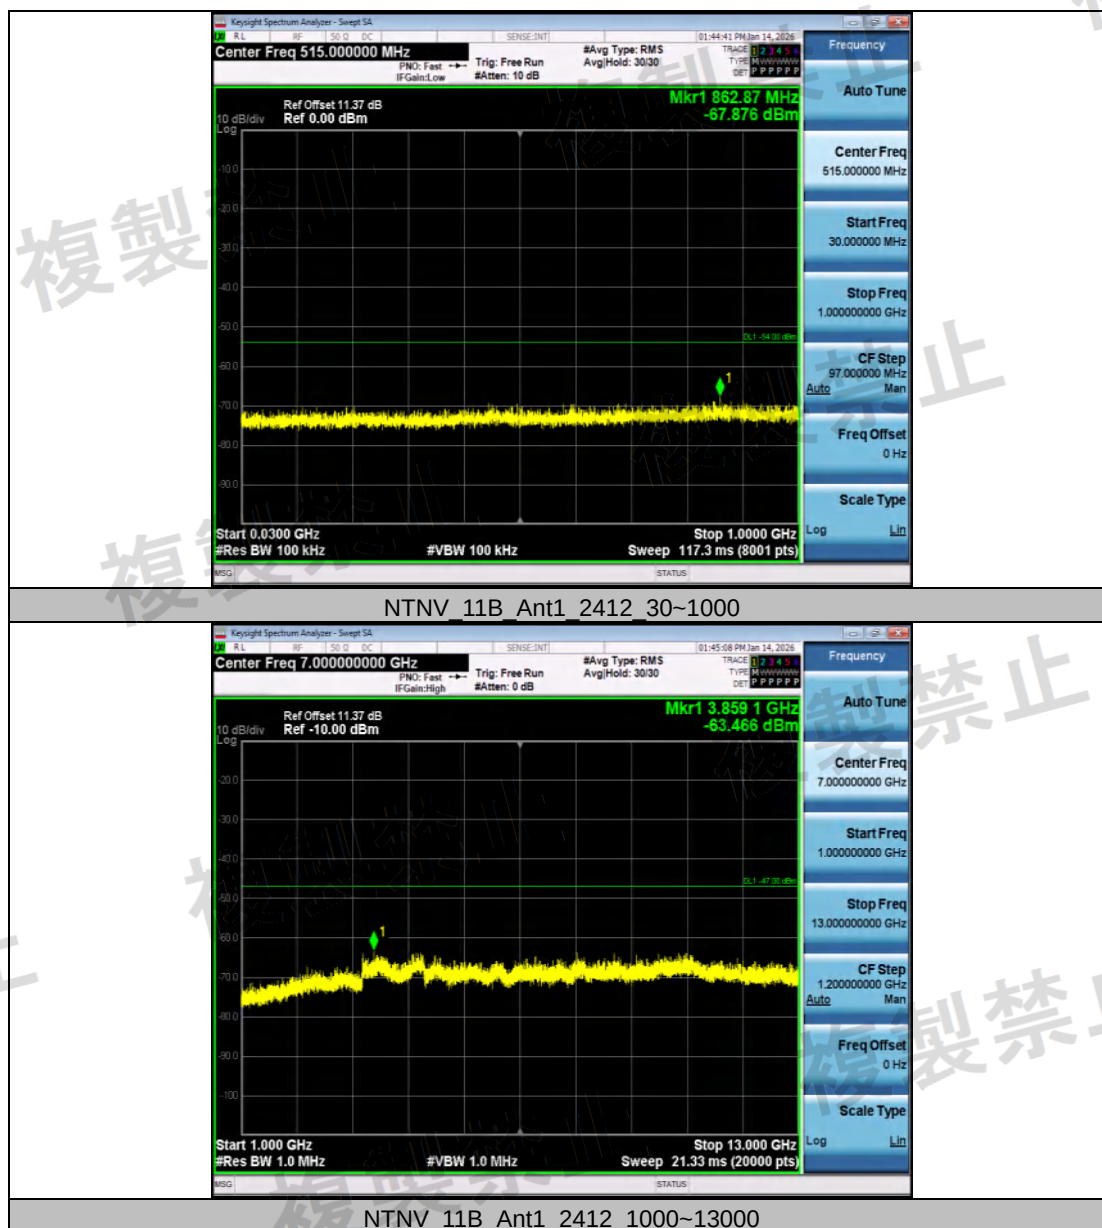


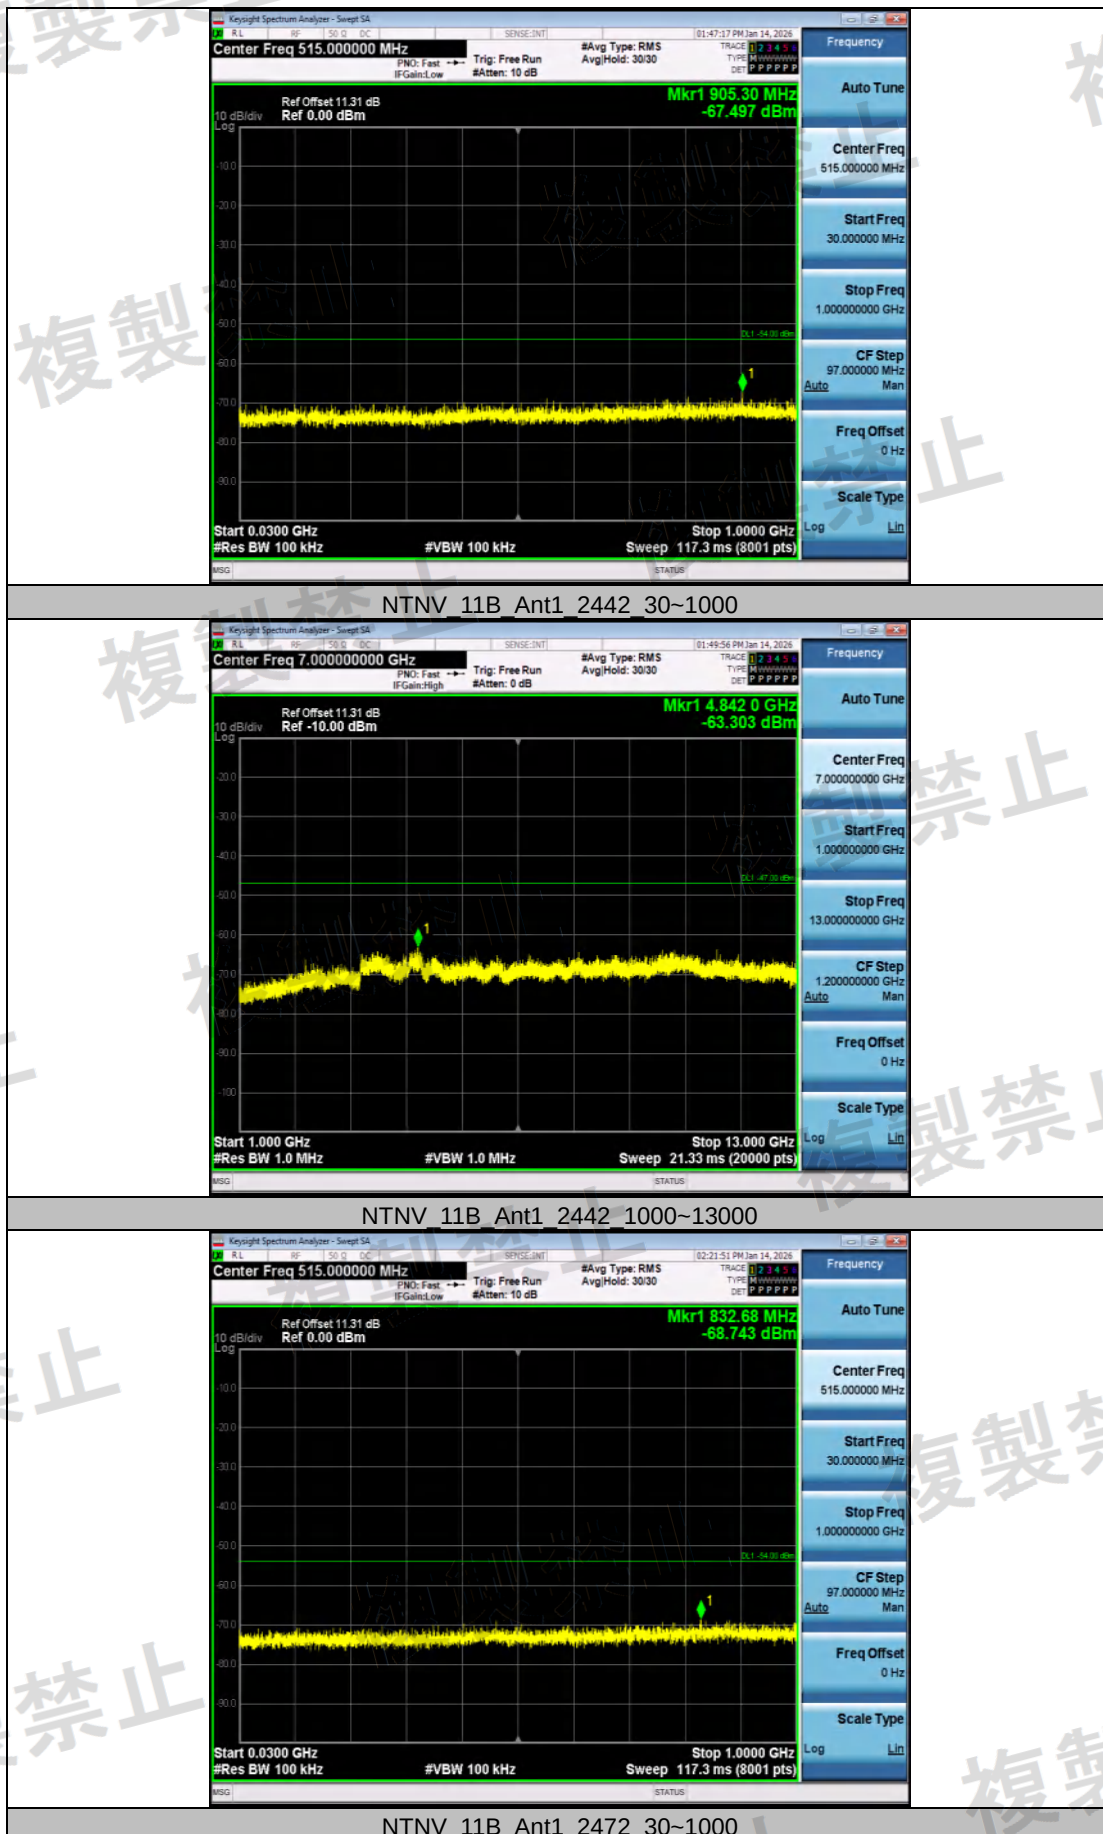


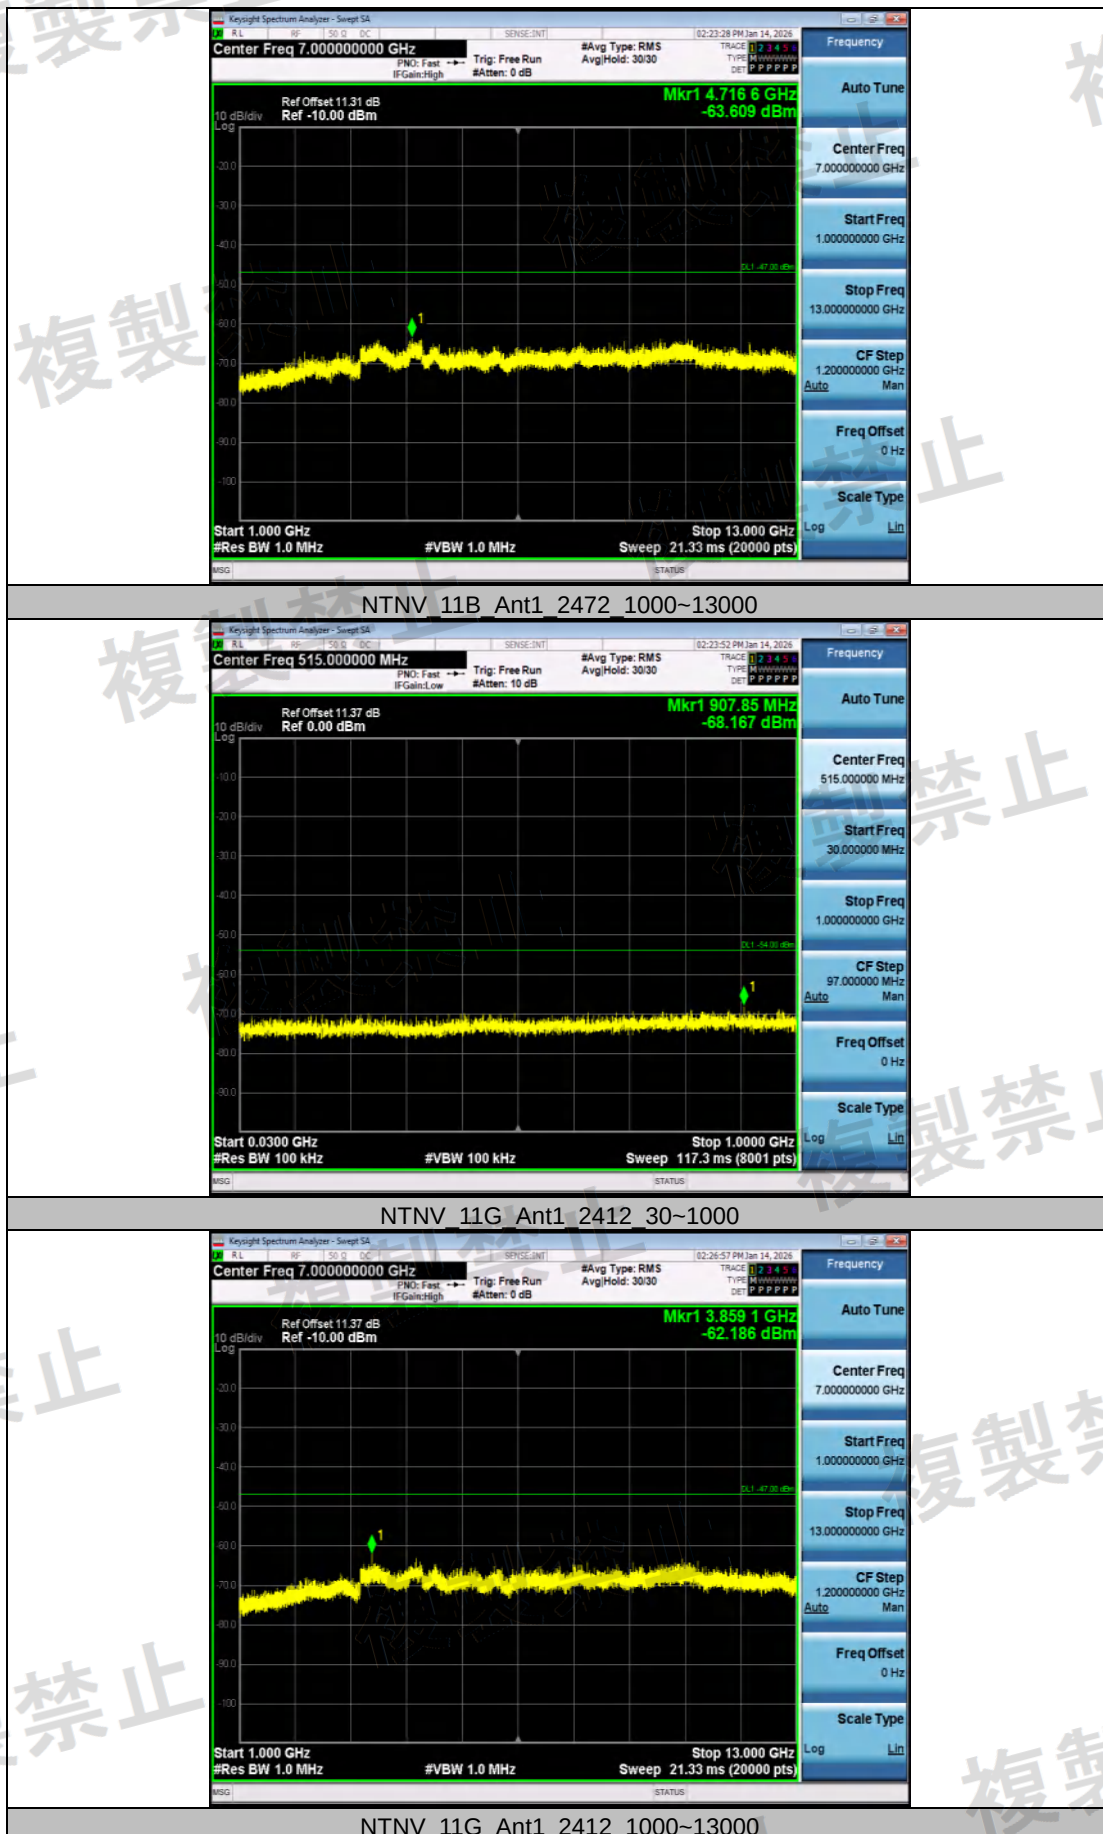


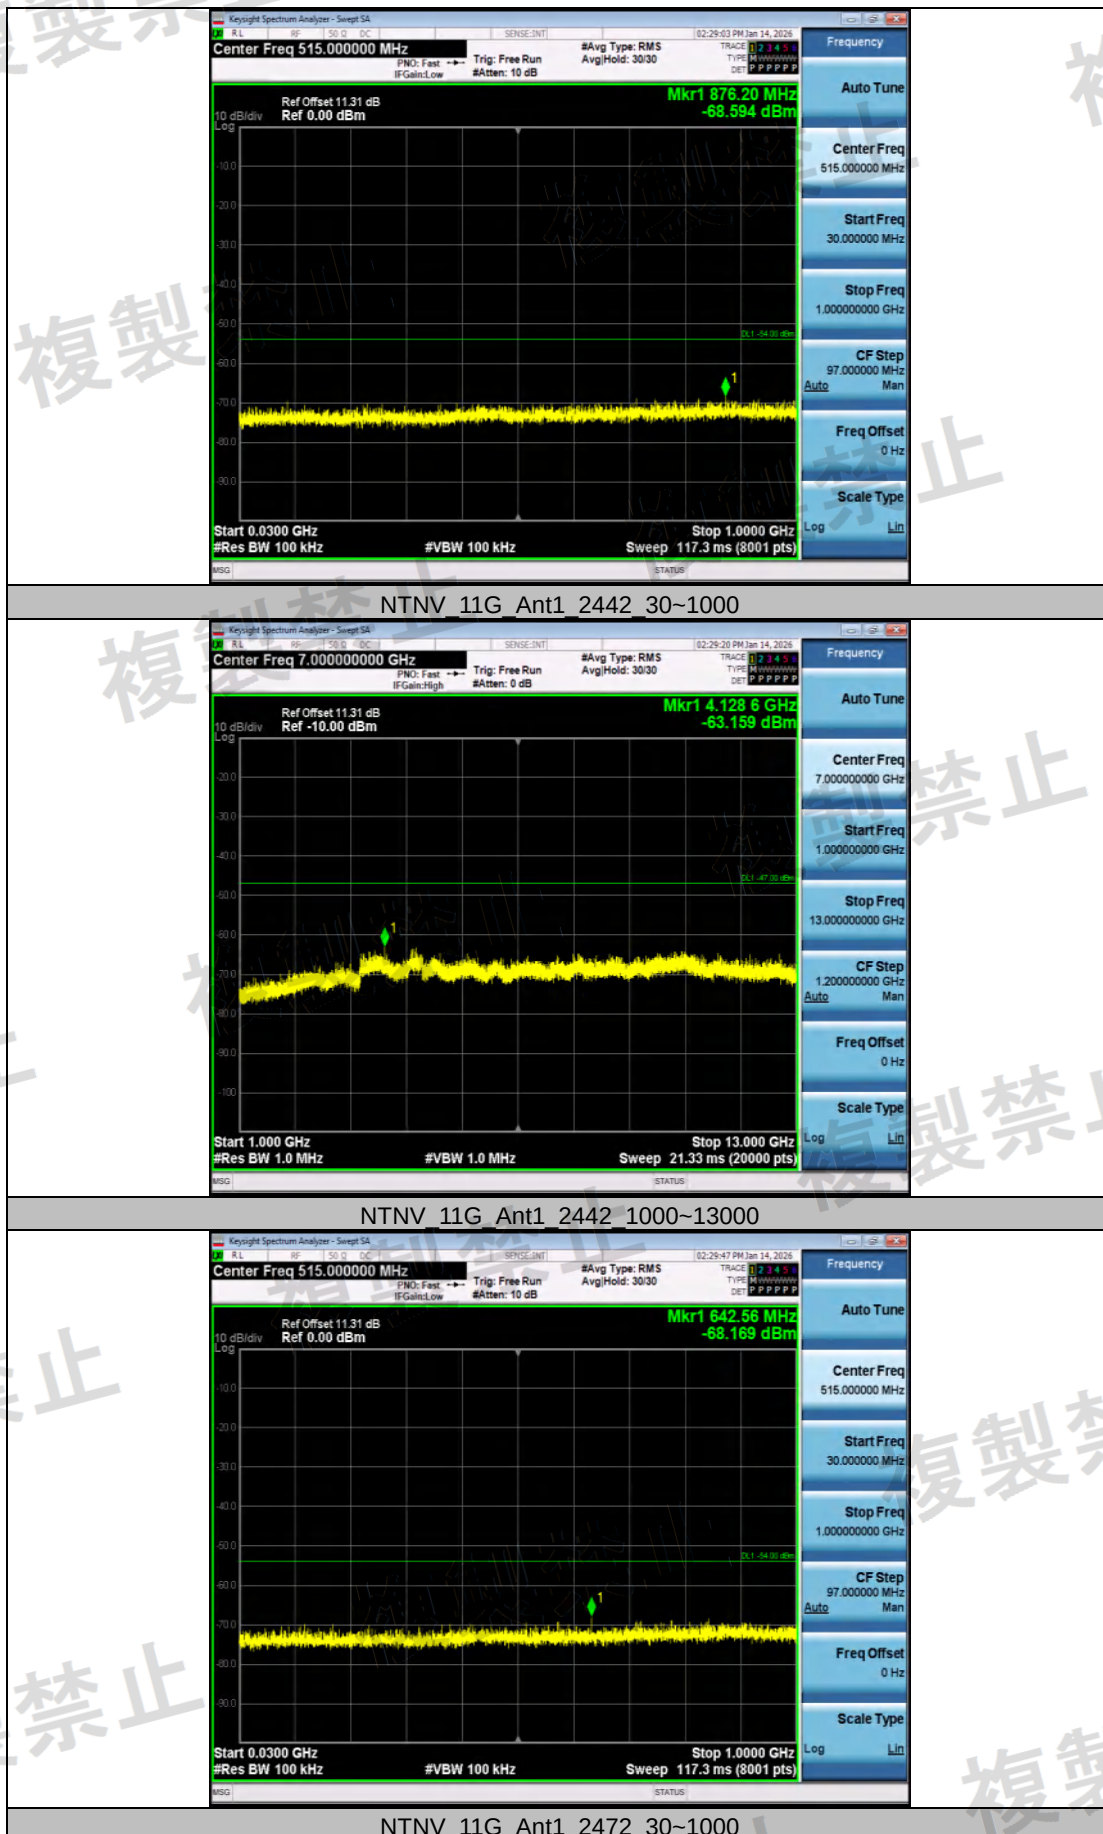


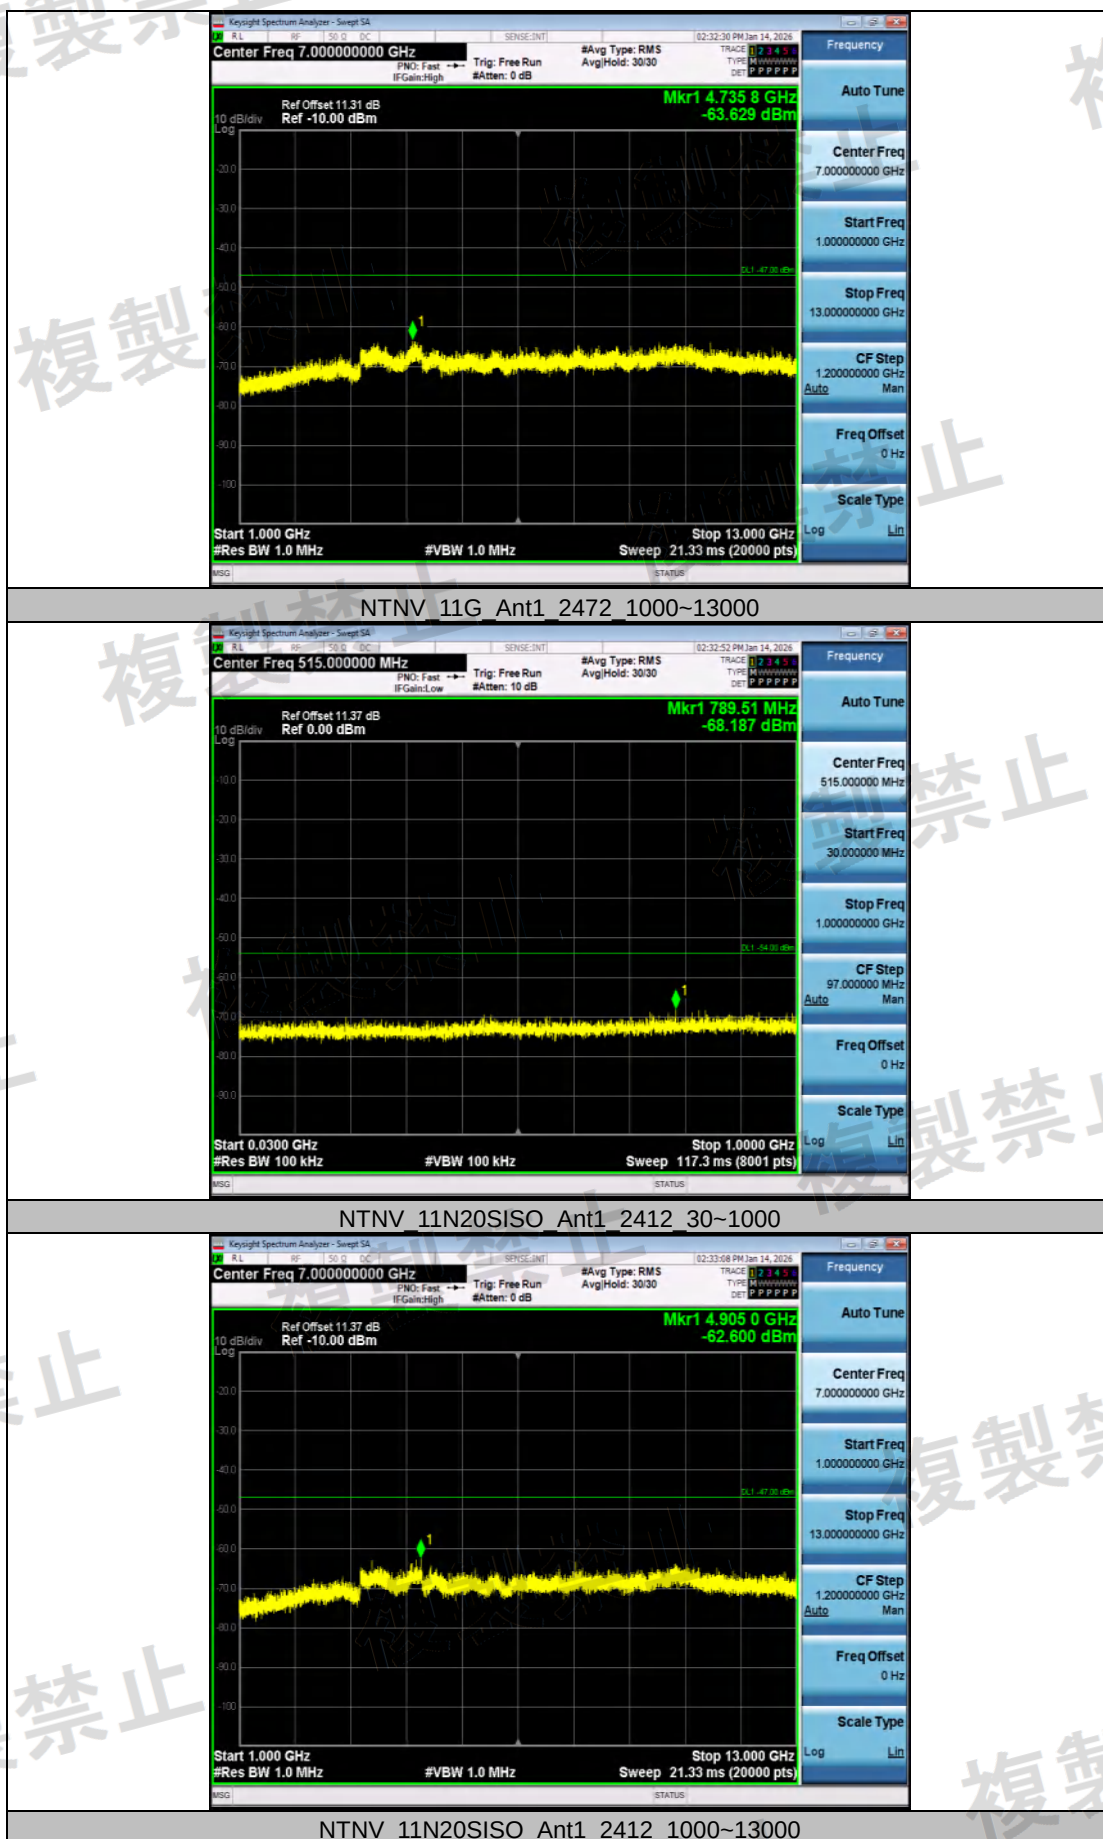


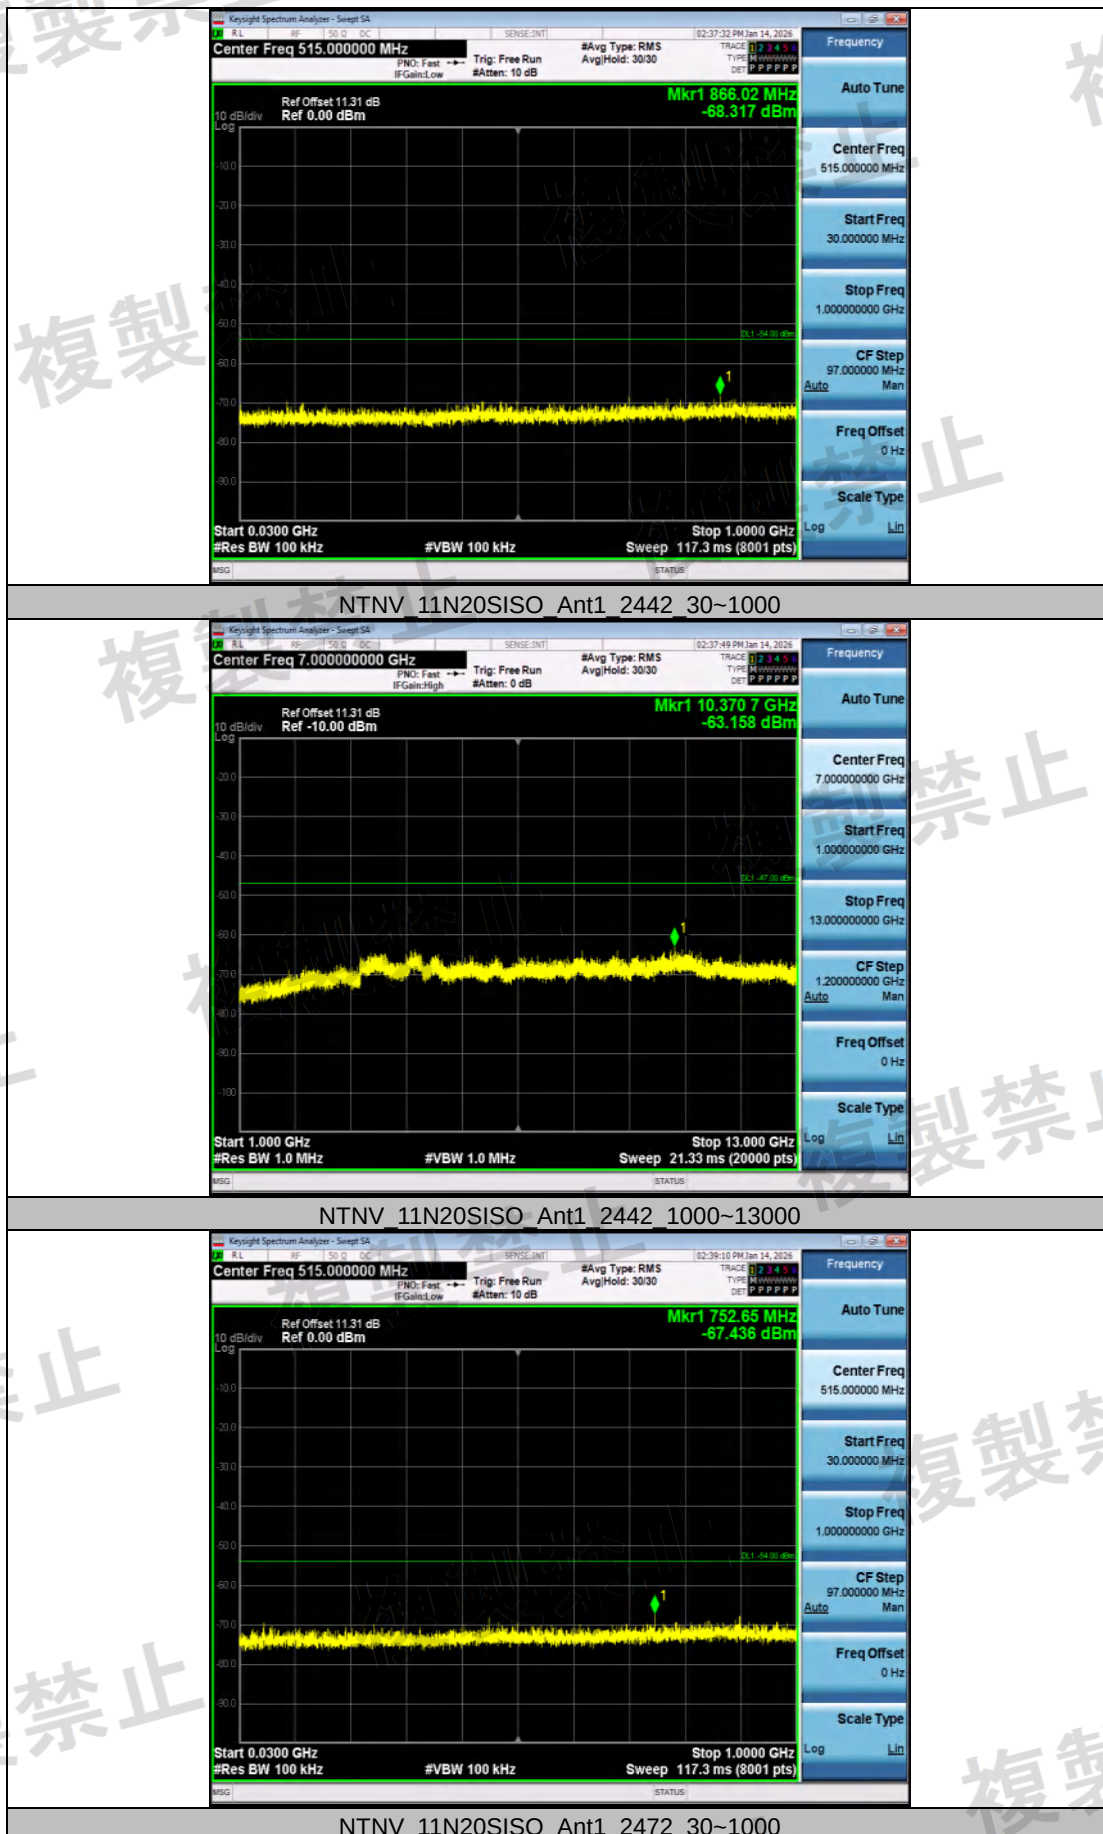


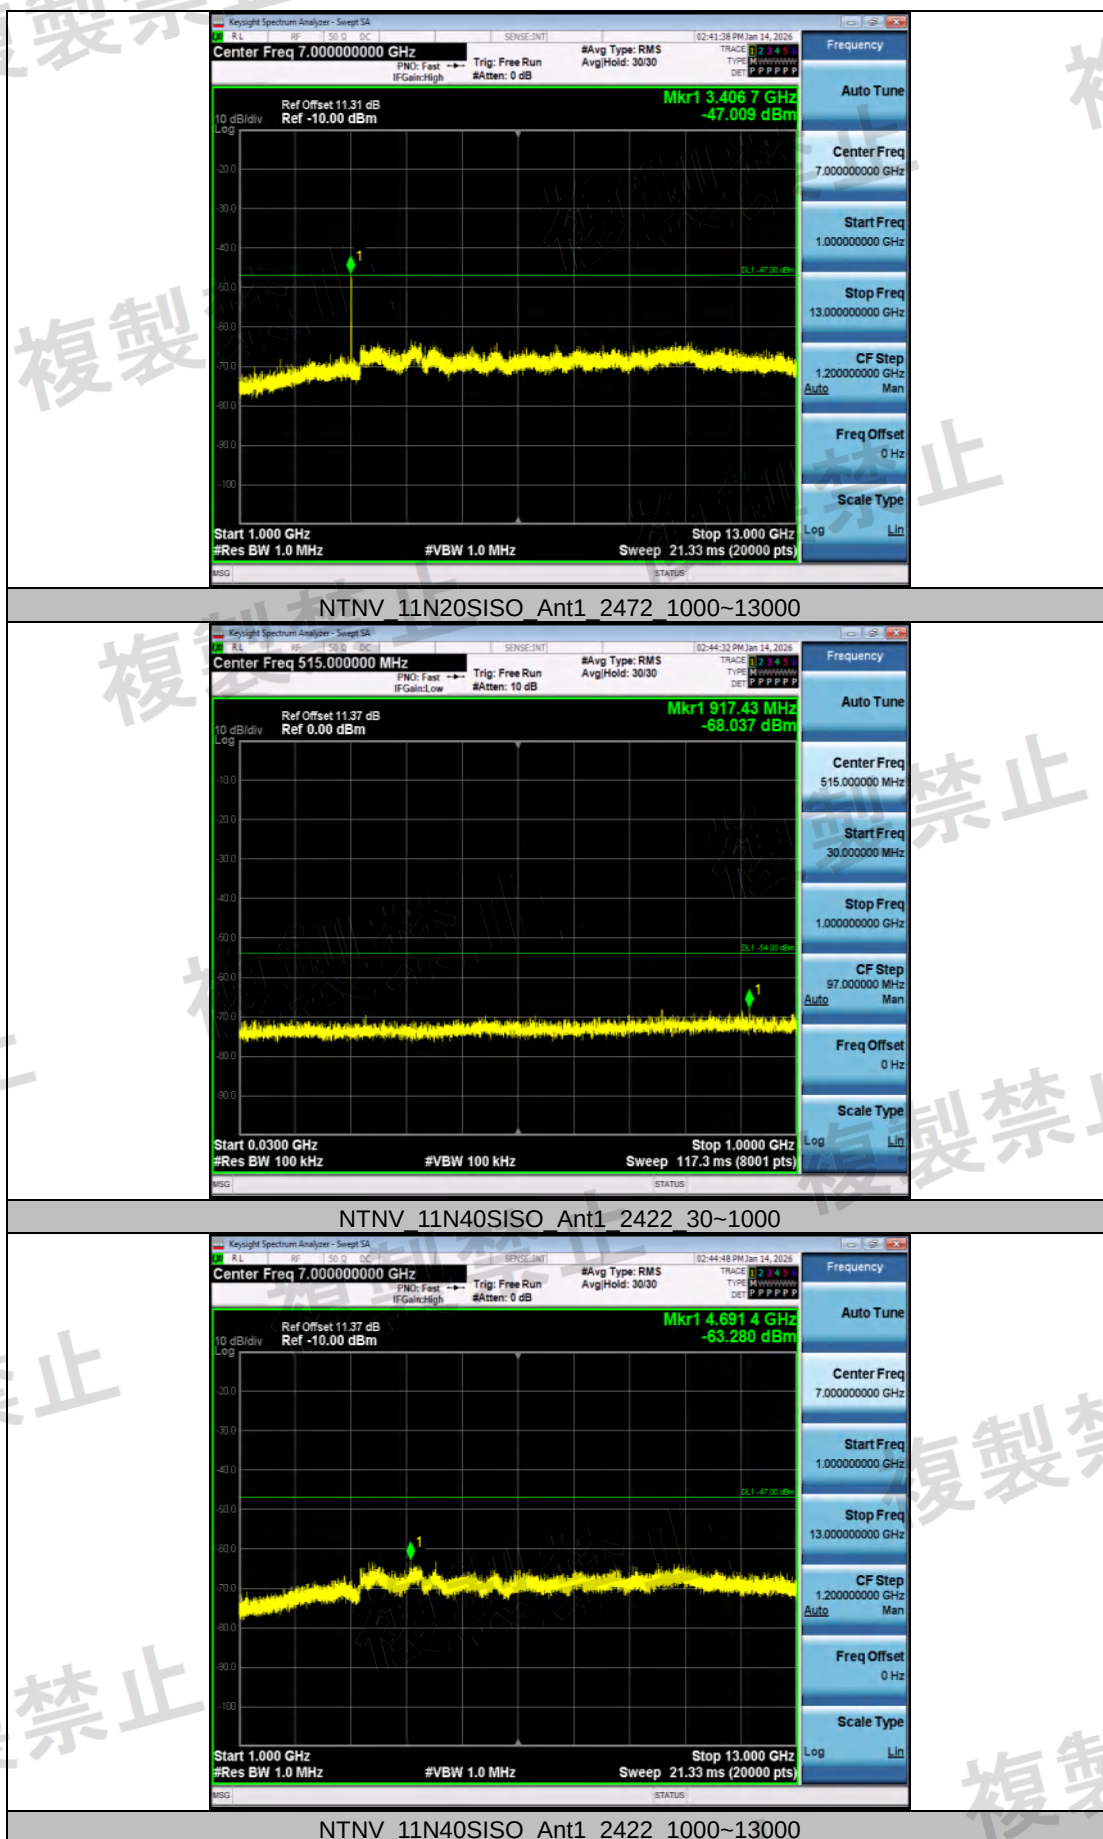


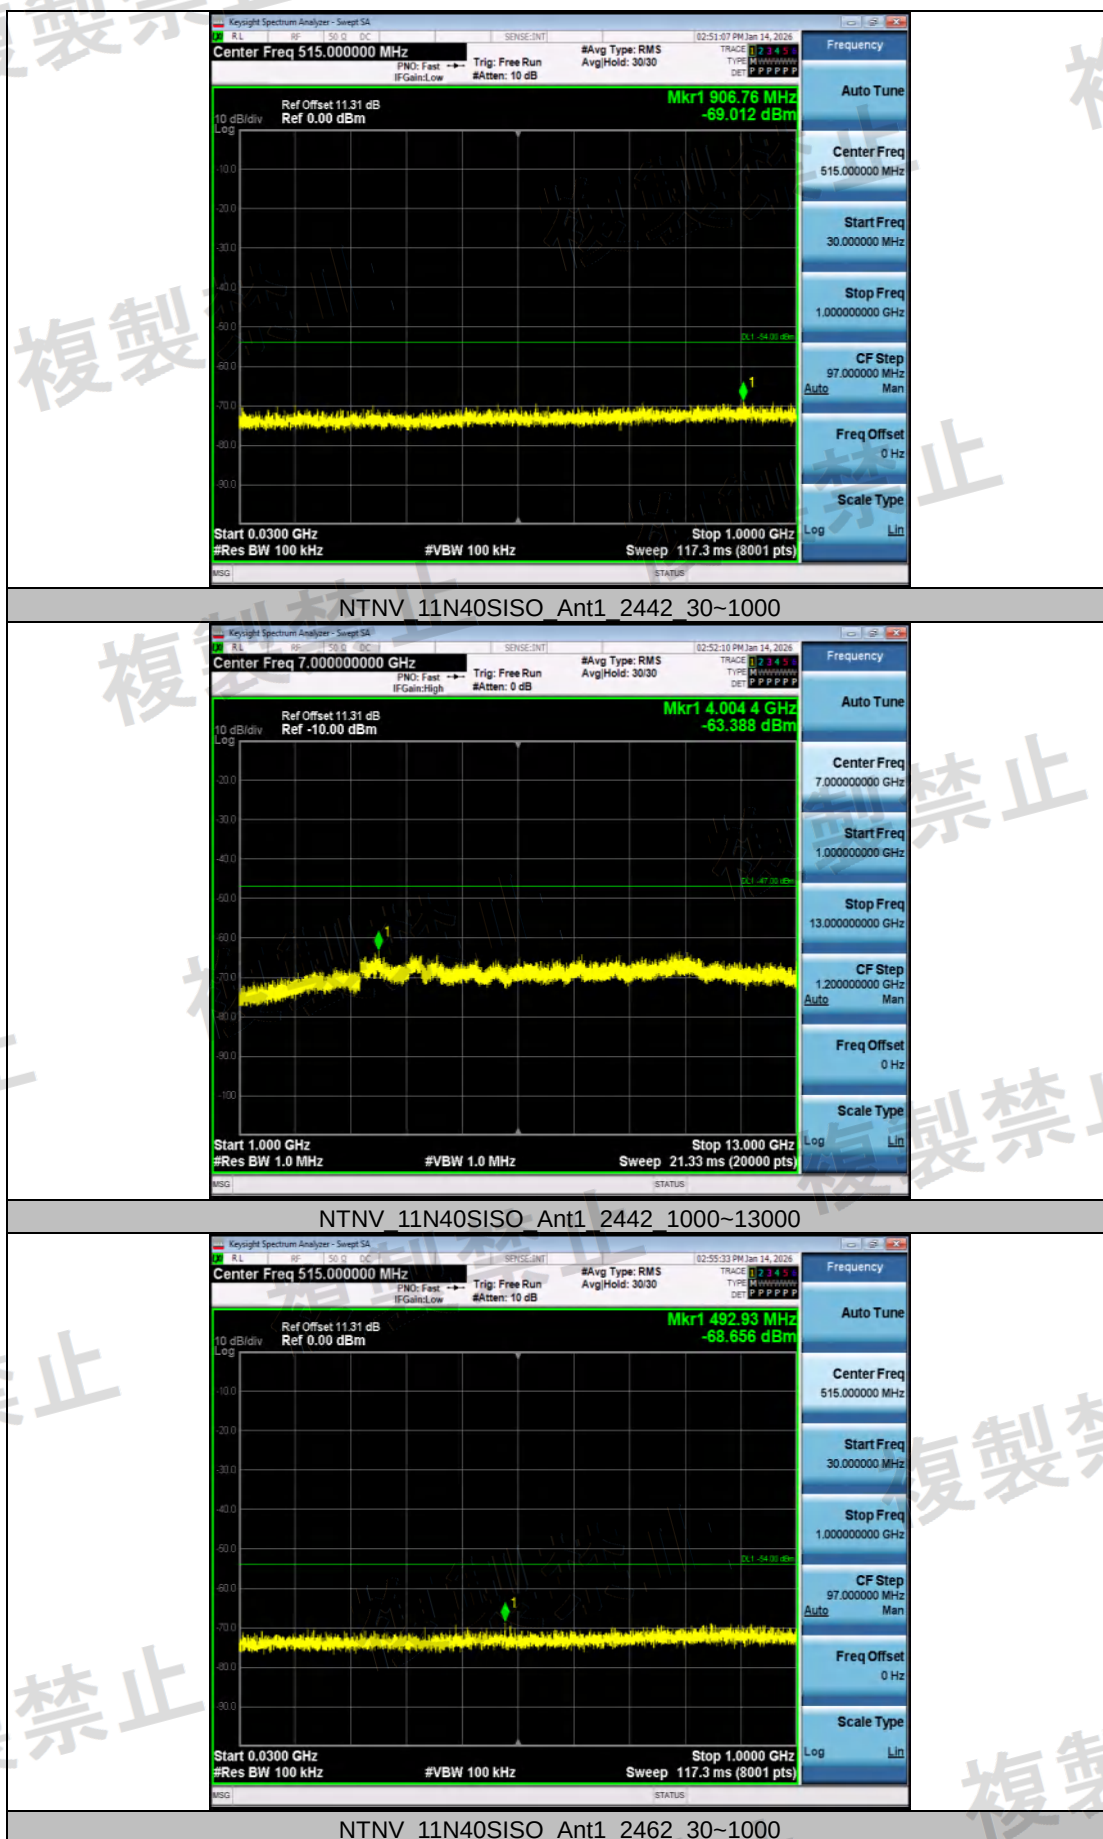


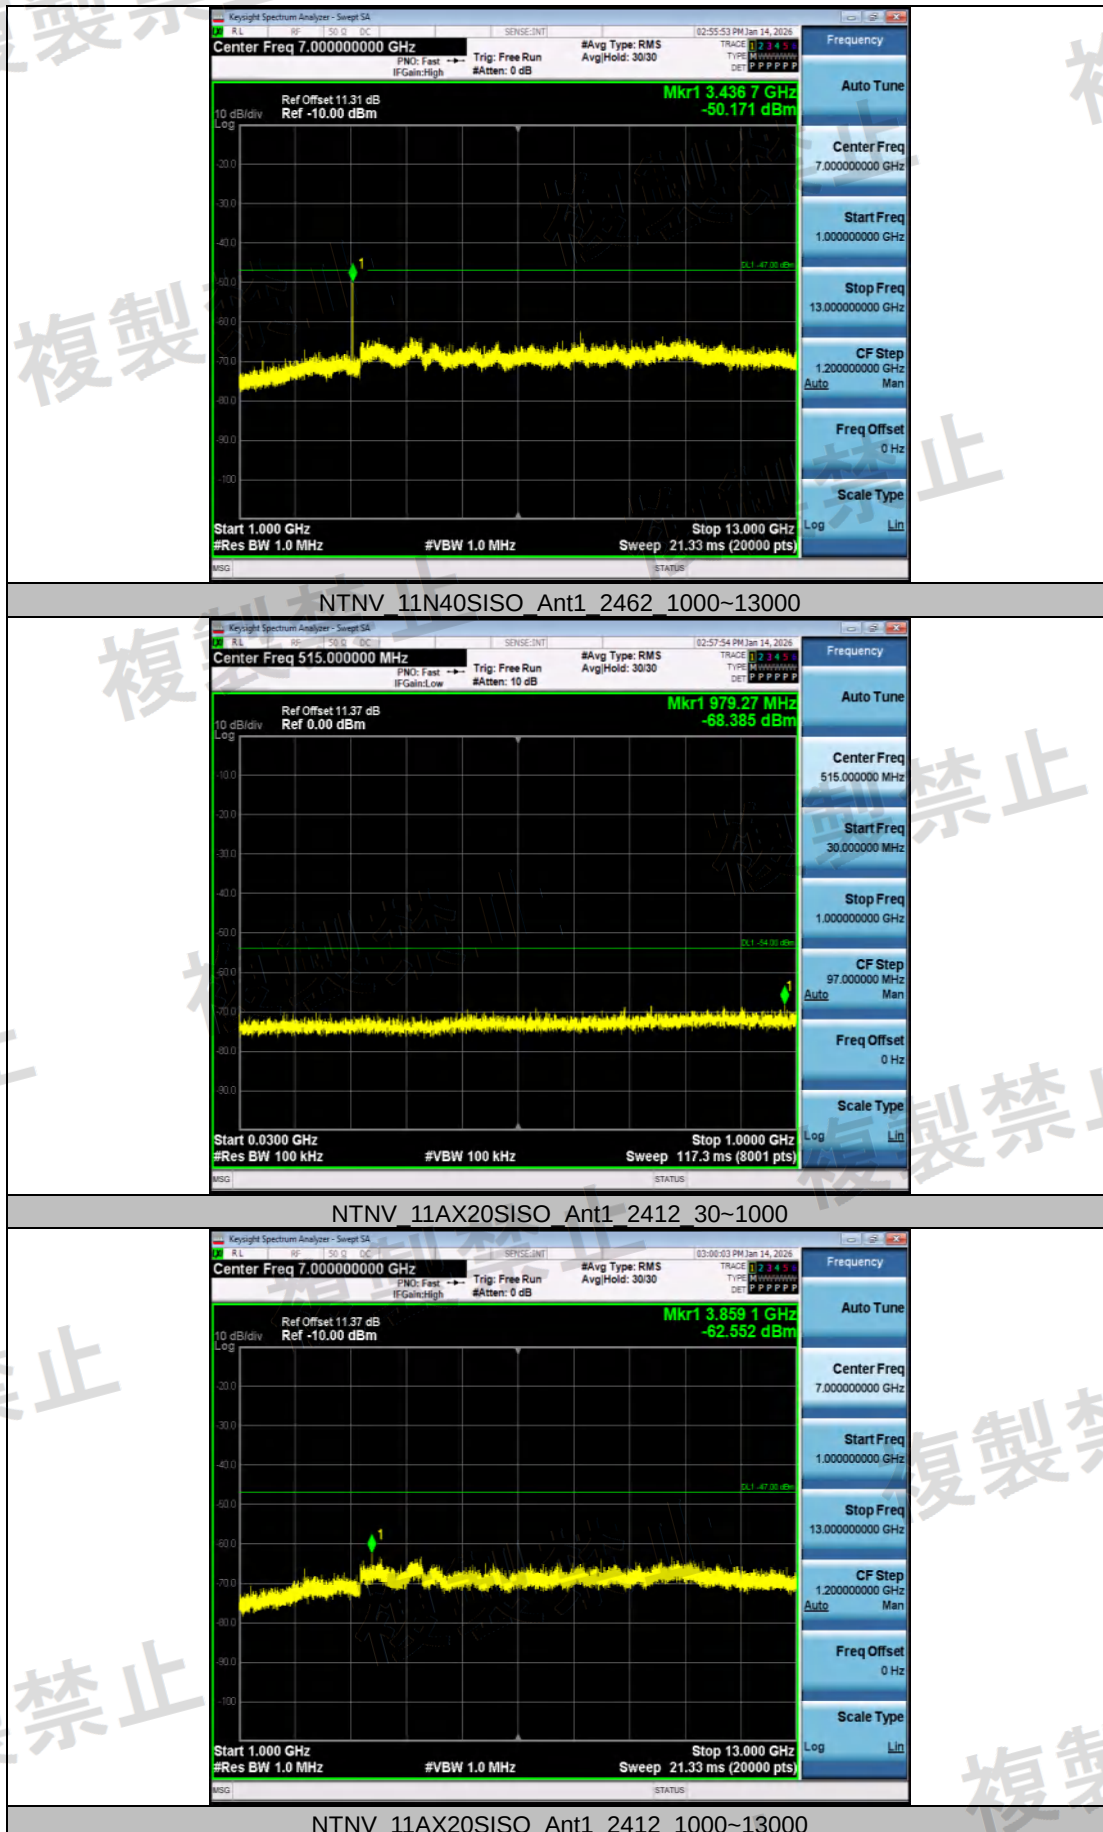

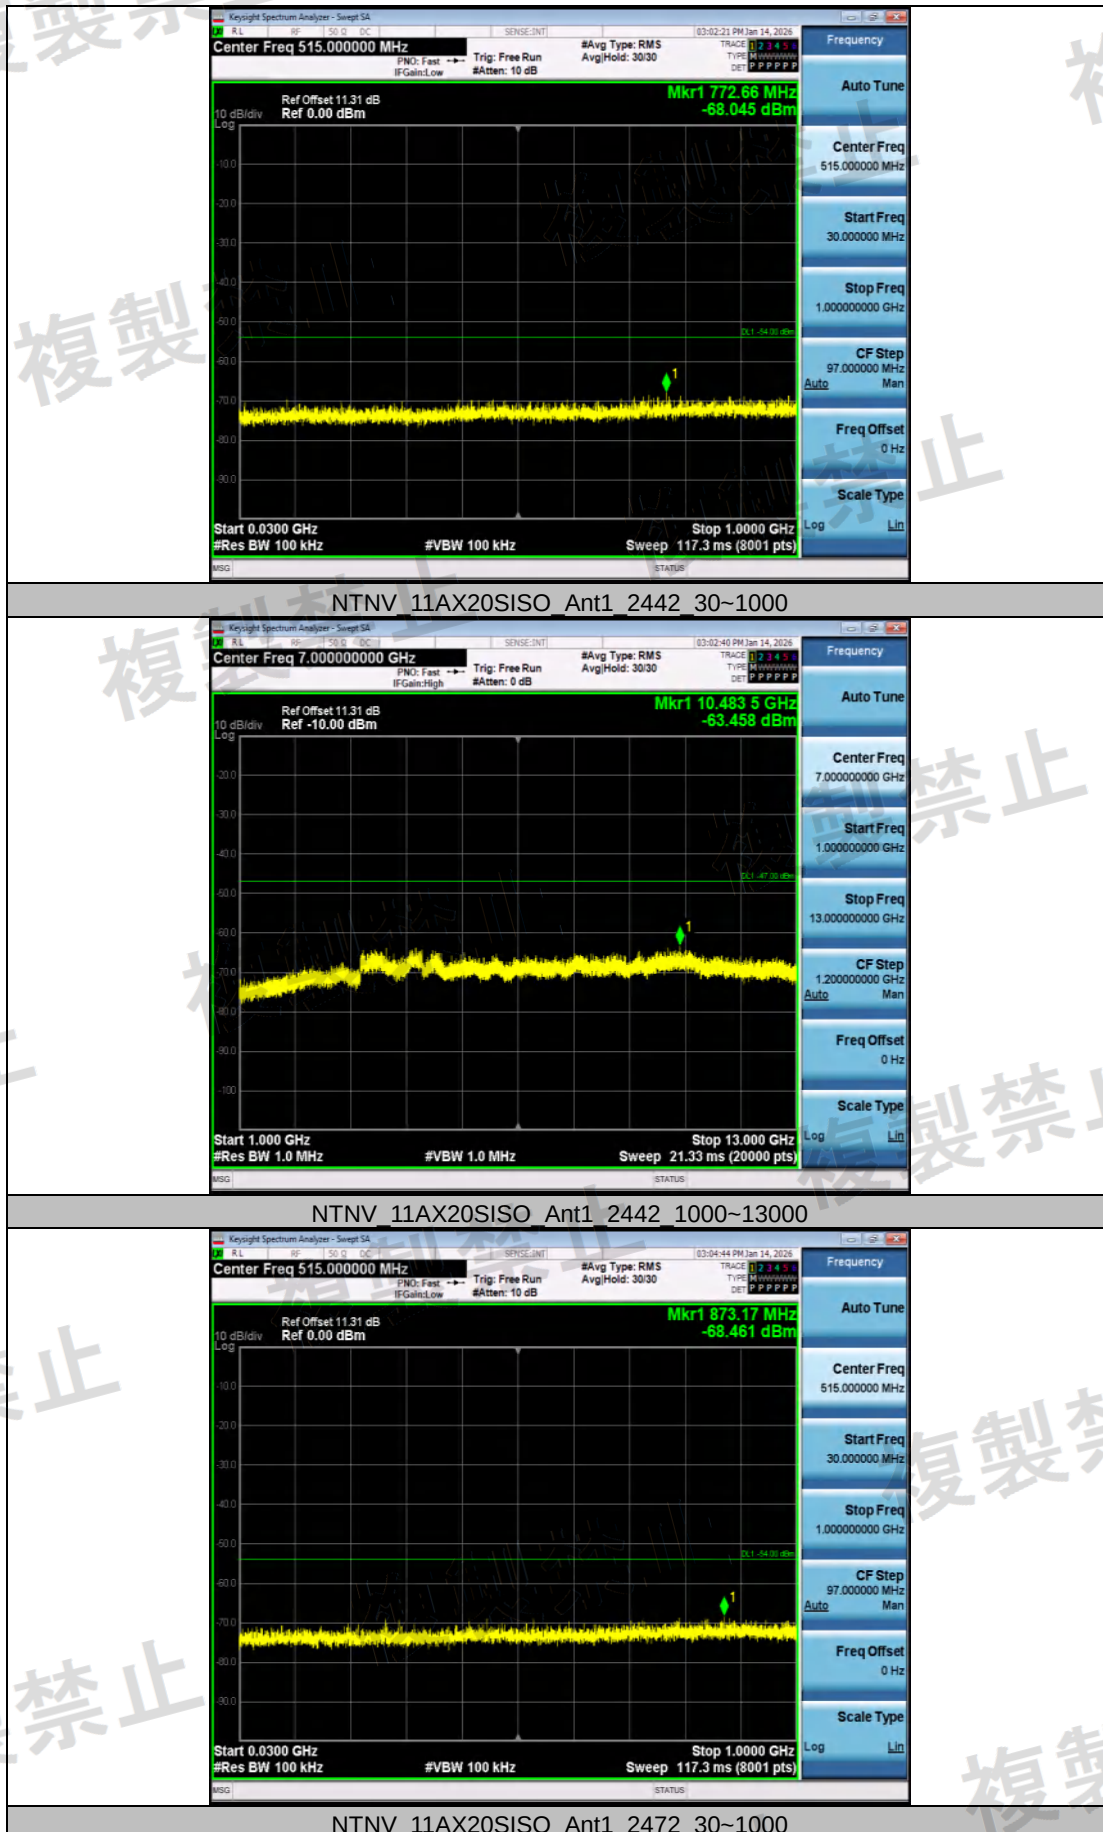


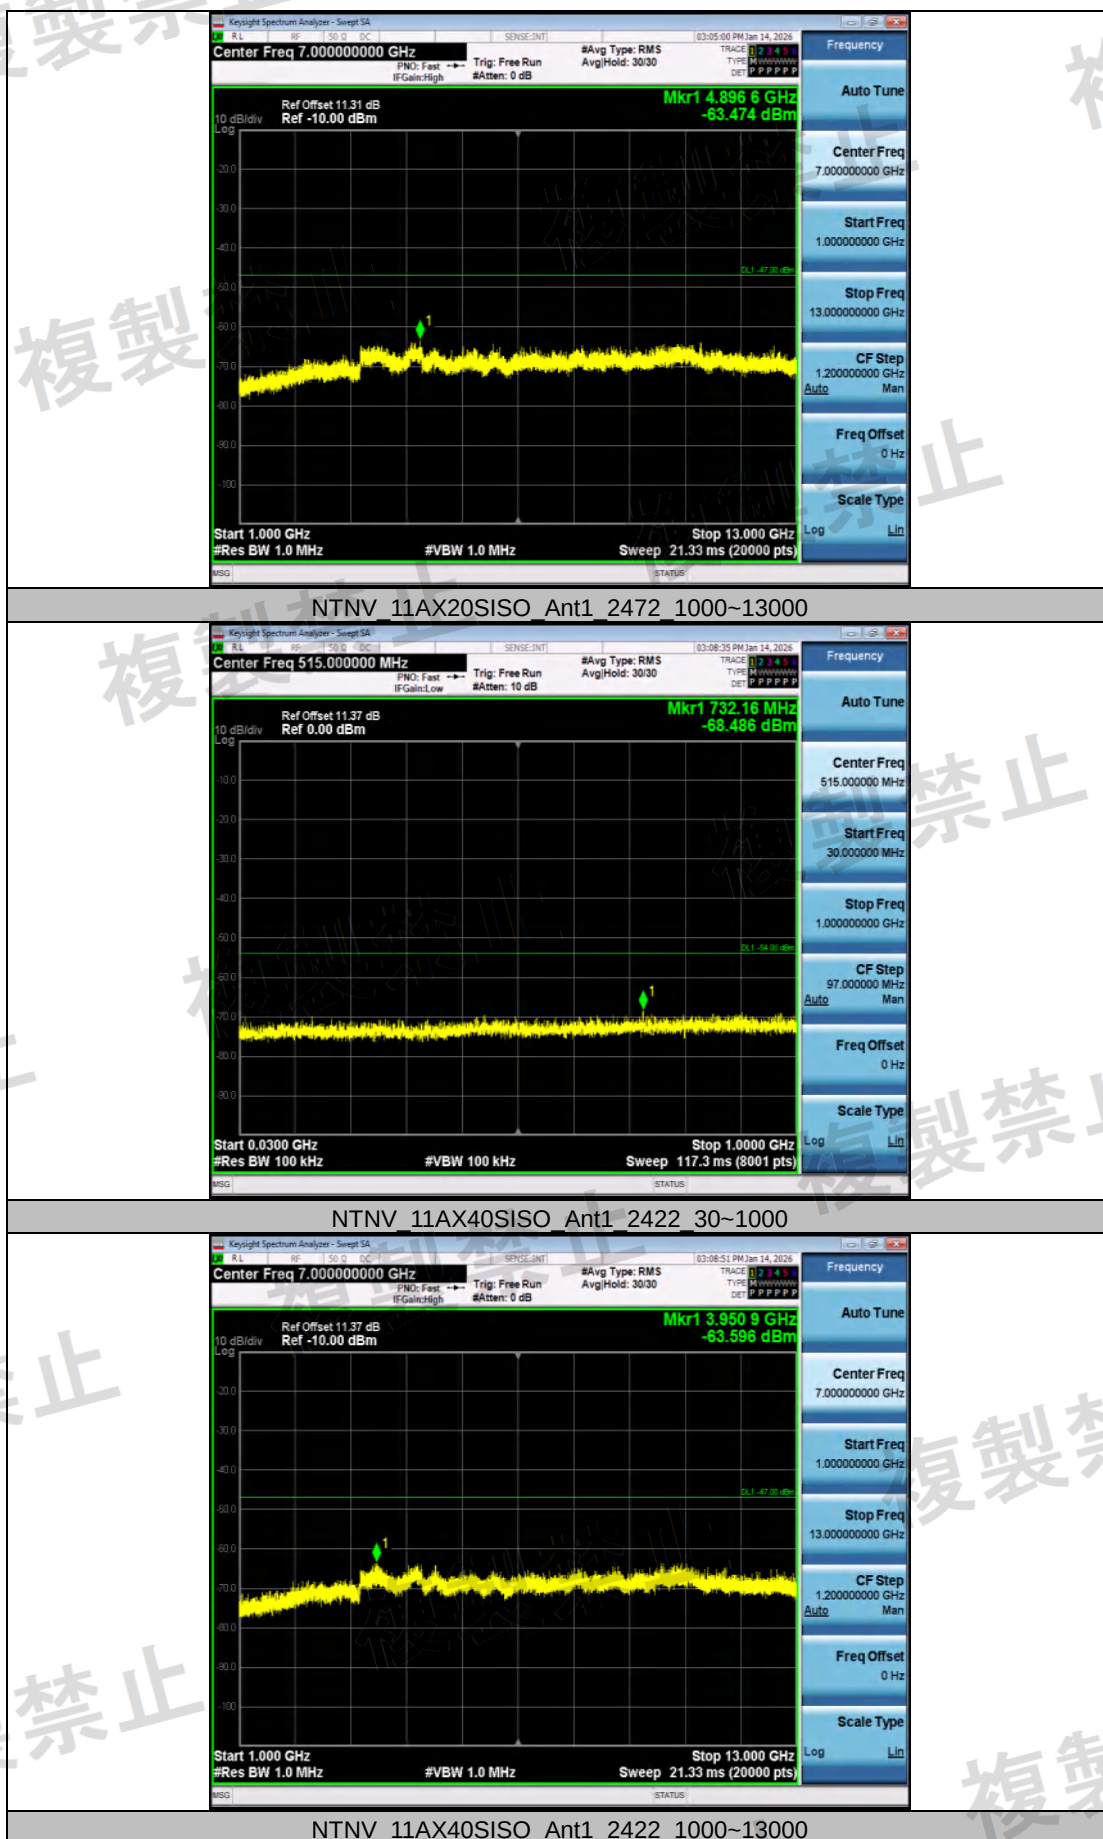

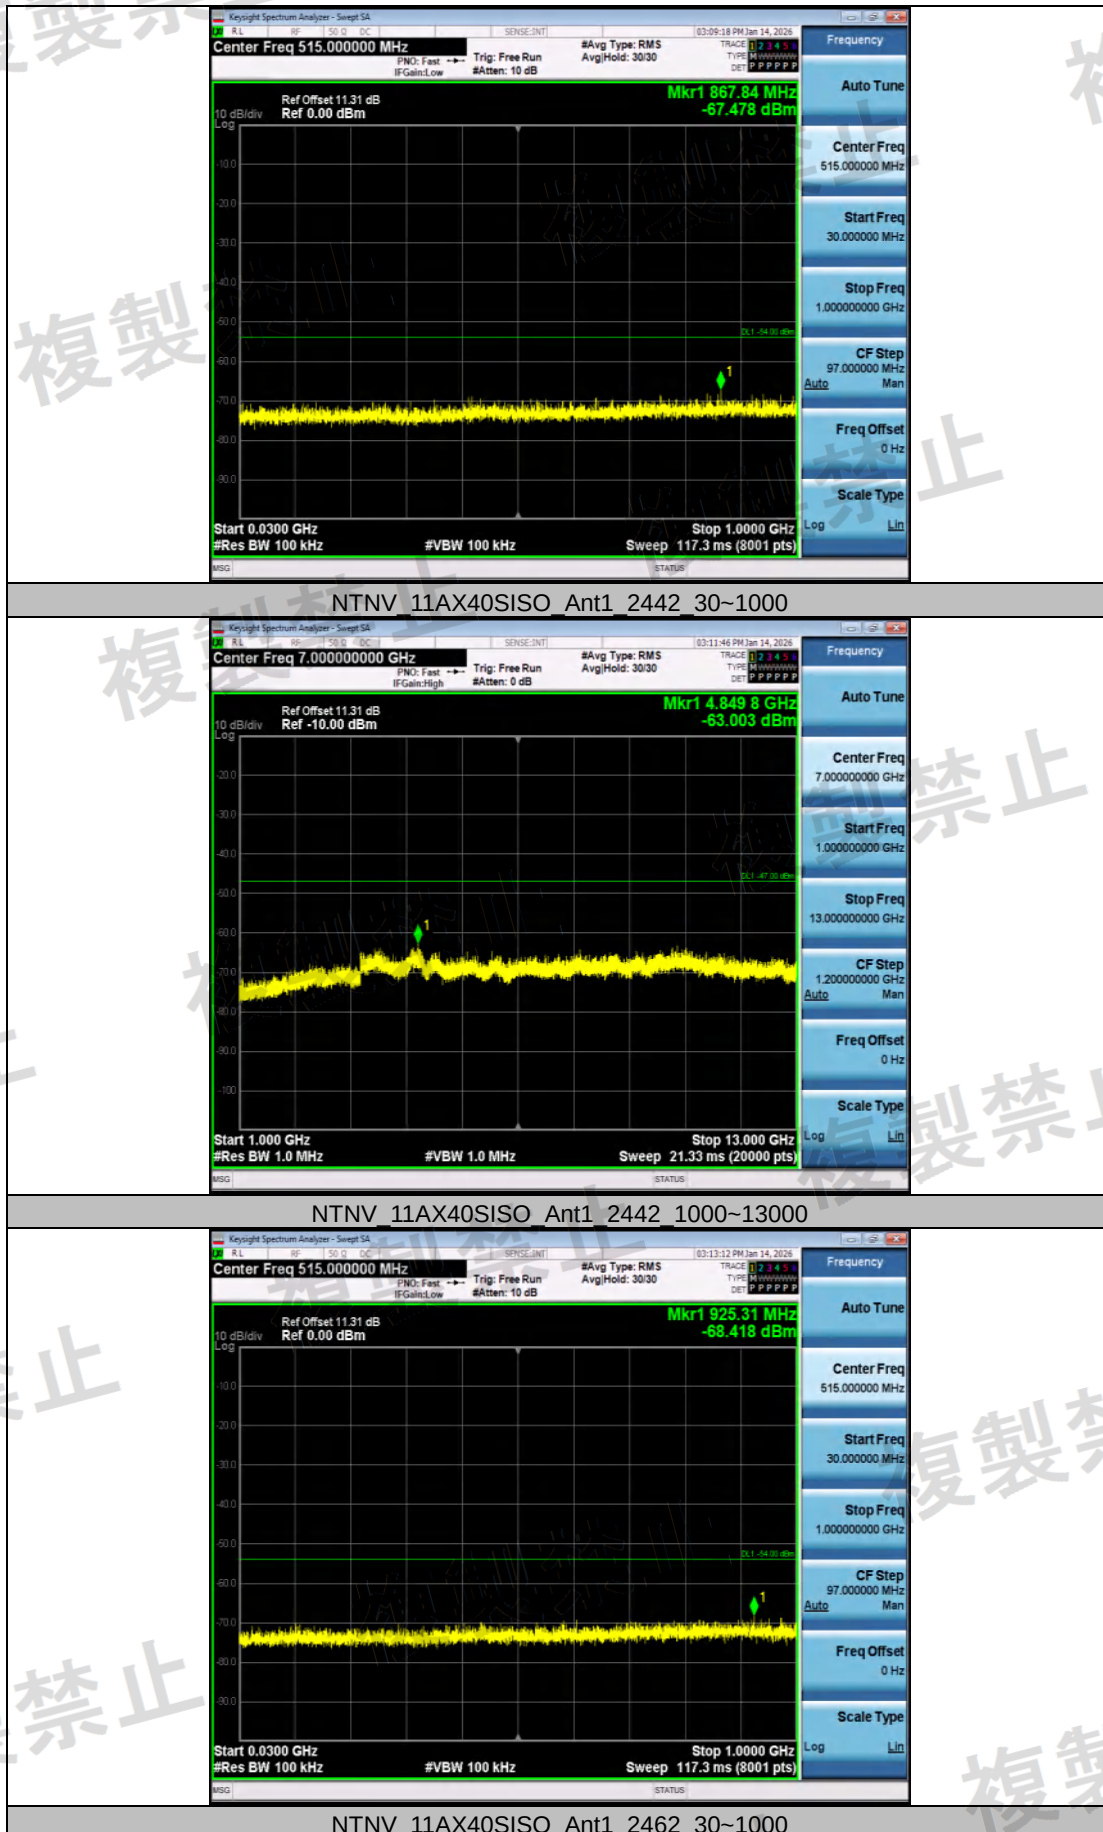

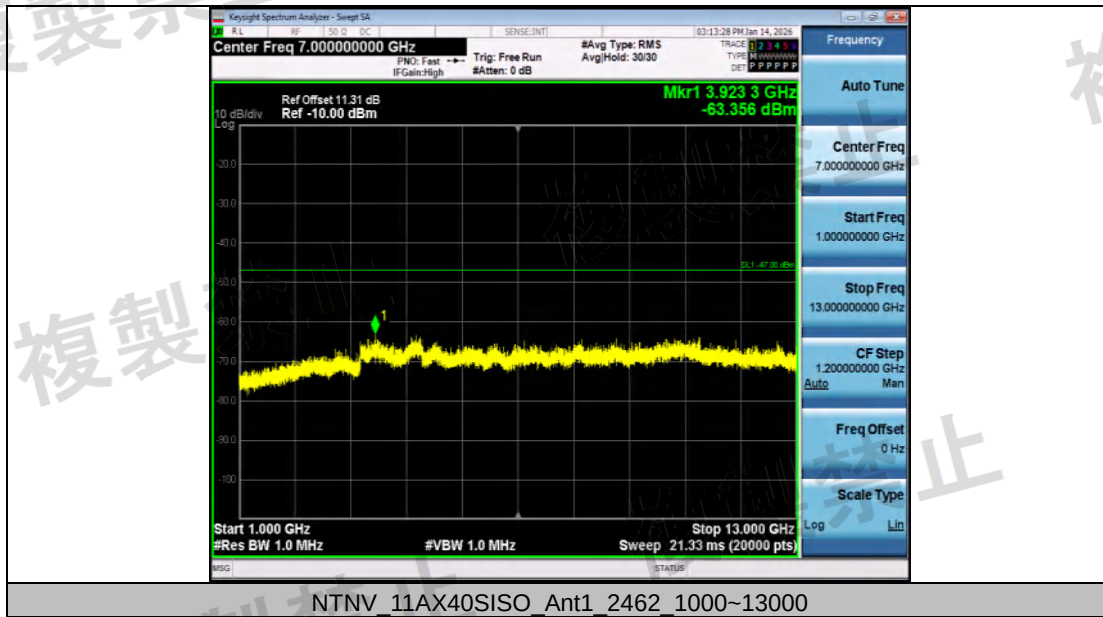

Web: www.worldtest.cn & www.worldtest.com.cn

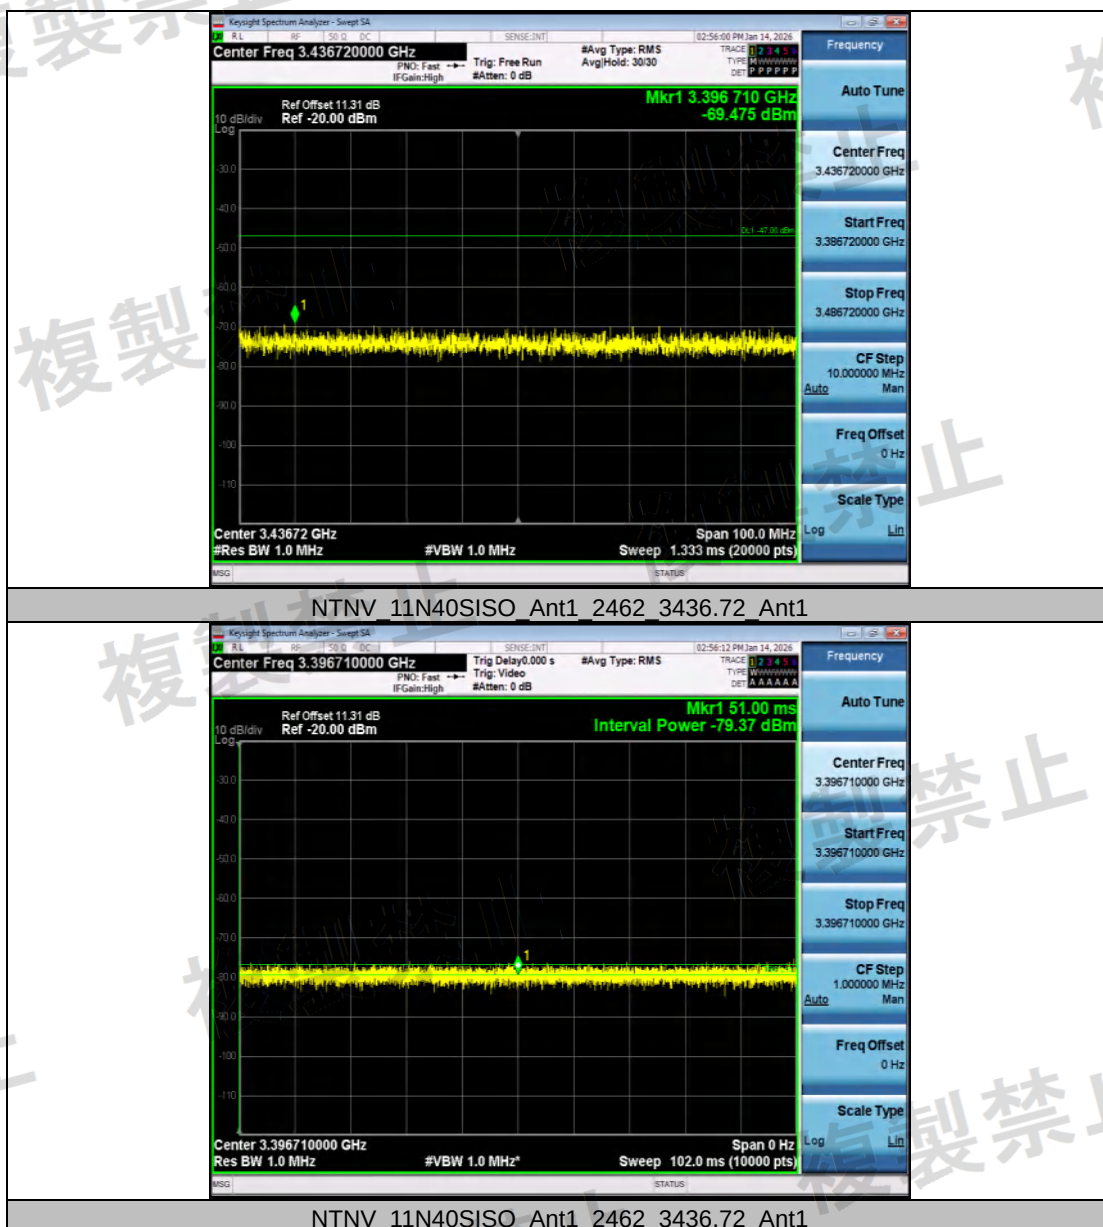


Appendix F: Duty cycle

Test Result:

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Verdict
11B	Ant1	2412	8.39	8.51	98.59	---
11G	Ant2	2412	8.39	8.51	98.59	---
11N20MIMO	Ant1	2442	8.39	8.52	98.47	---
11AX20MIMO	Ant2	2472	8.39	8.51	98.59	---

All the modes have been tested, and only the data of the worst mode is displayed.



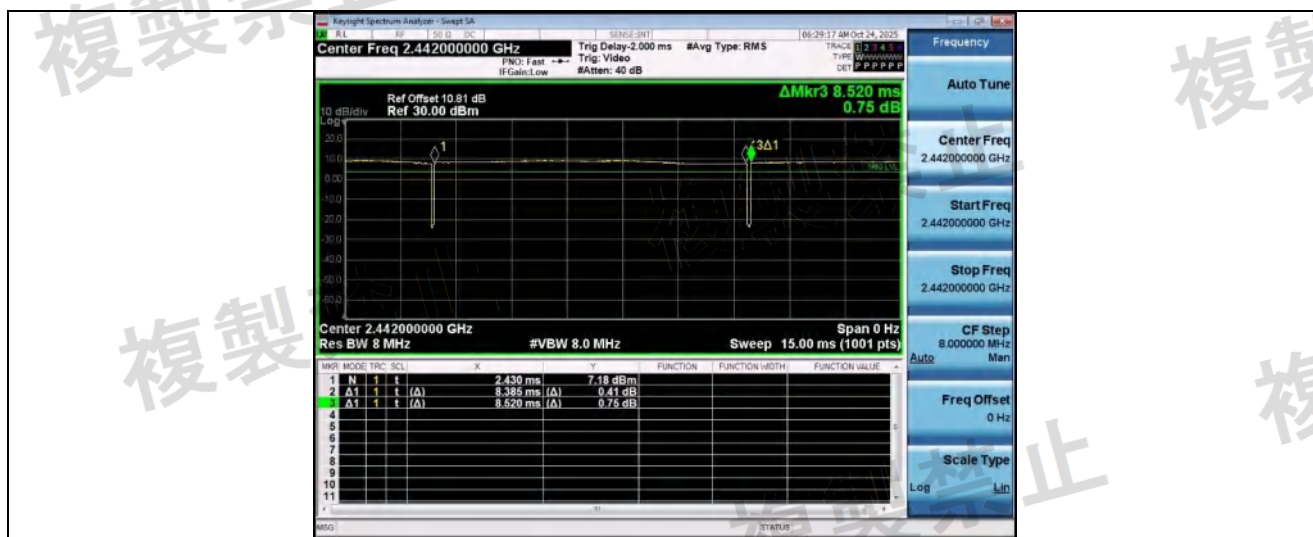

PHOTOS

1. Appendix I Test photo
2. Appendix II Exterior photo
3. Appendix II Interior photo

--- END ---