



晶復科技股份有限公司

A Test Lab Techno Corp.

低功率射頻電機試驗報告

報告編號 1806DR43

產品名稱 Wireless LAN / Bluetooth Module

申請廠商 元佑實業股份有限公司

商標或廠牌 OLYMPUS

型式 (號) S080WIFI-PCA

產品試驗依據之標準 低功率射頻電機技術規範(LP0002) 107 年 1 月 10 日

報告發行日期 107 年 07 月 02 日

填發本型式認可報告之試驗機構 (認可代號)

晶復科技股份有限公司
33465 桃園市八德區長安街 140-1 號
Tel : 03-2710188 / Fax : 03-2710190

財團法人全國認證基金會
認證編號 : 1330
認證有效期間 : 105.09.06 ~ 108.09.05
認可能量範圍 : 低功率射頻電機技術規範(LP0002)
2.4GHz 射頻電信終端設備技術規範(RTTE01)



實驗室聲明

本測試報告內之測試結果可藉由測試儀器設備之校正報告與本報告內所評估量測不確定度追溯至國家或國際標準。

不得使用本報告宣稱產品是由 TAF, NVLAP 或任何政府機構背書。

此份報告未經晶復科技股份有限公司書面同意, 不得部分複製。

低功率射頻電機測試證明書


發行日期：107年07月02日

產品名稱：Wireless LAN / Bluetooth Module
商標：OLYMPUS
型號：S080WIFI-PCA
申請廠商：元佑實業股份有限公司
申請者地址：臺北市內湖區陽光街365巷37號5樓
製造廠商：OLYMPUS CORPORATION
製造商地址：2951 Ishikawa-machi, Hachioji-shi, Tokyo 192-8507, Japan
待測物電壓：VBAT：3.35 ~ 4.2V,
VIO1.8V/3.3V：1.62 ~ 3.63V
試驗電壓：DC 4V
量測規範：低功率射頻電機技術規範(LP0002) 107年1月10日
試驗實驗室：晶復科技股份有限公司(桃園市八德區長安街140-1號)
試驗受理日期：107 年 05 月 02 號
樣品接受日期：107 年 06 月 08 號
試驗完成日期：107 年 06 月 22 號

報告中所描述之測試結果與待測設備之架構組合，均根據實際量測情況作詳實的記錄。
由測試結果顯示，上述待測設備樣機確實已符合低功率射頻電機技術規範(LP0002)所規定的各項限制值。

特此證明！

報告製作者：



(趙 怡 珊)

測 試 者：



(歐 陽 良 相)

審 核 者：



(呂 宗 霖)

本測試報告所敘述之測試結果，僅對客戶所提供之測試樣品，在此測試報告所述及之測試條件下所實施之量測有效。

目 錄

名 稱	頁 次
低功率射頻電機測試證明書.....	2
1. 一般敘述	4
1.1 待測設備一般敘述.....	4
1.2 其他相關聲明.....	6
2. 量測儀器及測試配置說明	6
2.1 量測設備	6
2.2 檢驗系統示意圖	7
2.3 輔助測試之週邊設備描述.....	7
2.4 測試模式.....	8
2.5 量測不確定度.....	16
2.6 試驗環境.....	16
3. 測試項目與結果判定總表	17
4. 測試項目表列	19
4.1 電源線傳導干擾之量測.....	19
4.2 2.4GHz 檢驗項目	20
4.2.1 場強輻射之量測	20
4.2.2 峰值傳導輸出功率之量測	69
4.2.3 天線規格之要求	70
4.2.4 非必要頻帶之量測	71
4.2.5 6dB 頻寬之要求.....	78
4.2.6 峰值發射功率頻譜密度之要求	85
4.2.7 電波暴露量之評估	92
4.3 5GHz U-NII 檢驗項目	94
4.3.1 場強輻射與非必要頻帶之量測	94
4.3.2 峰值發射功率之量測	222
4.3.3 峰值功率頻譜密度之要求	227
4.3.4 26dB 頻寬之要求.....	245
4.3.5 6dB 頻寬之要求.....	258
4.3.6 發射功率控制(TPC)之量測	262
4.3.7 動態頻率選擇(DFS)之量測	263
4.3.8 頻道可用性檢查時間之量測.....	264
4.3.9 頻道移動時間之量測	265
4.3.10 不可佔用時間之量測	267
4.3.11 天線規格之要求	268
4.3.12 電波暴露量之評估	269

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產 品 名 稱	Wireless LAN / Bluetooth Module	
商 標 或 廠 牌	OLYMPUS	
型 號	S080WIFI-PCA	
額 定 電 源	VBAT : 3.35 ~ 4.2V, VIO1.8V/3.3V : 1.62 ~ 3.63V	
調 變 方 式	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n 2.4GHz 20MHz (256QAM): OFDM IEEE 802.11a U-NII Band: OFDM IEEE 802.11n 5GHz 20MHz / 40MHz U-NII Band: OFDM IEEE 802.11ac 20MHz / 40MHz /80MHz U-NII Band: OFDM IEEE 802.11n 5GHz 20MHz / 40MHz U-NII Band DFS: OFDM IEEE 802.11ac 20MHz / 40MHz /80MHz U-NII Band DFS: OFDM *此產品之不具有動態選擇(DFS)之雷達偵測功能 (Client without radar detection function)	
頻 率 使 用 範 圍	Mode	Frequency Range (MHz)
	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n 2.4GHz 20MHz (256QAM)	2412 – 2472
	IEEE 802.11a / IEEE 802.11n 5GHz 20MHz U-NII Band I IEEE 802.11ac 20MHz U-NII Band I	5180 – 5240
	IEEE 802.11a / IEEE 802.11n 5GHz 20MHz U-NII Band II-A IEEE 802.11ac 20MHz U-NII Band II-A	5260 – 5320
	IEEE 802.11a / IEEE 802.11n 5GHz 20MHz U-NII Band II-C IEEE 802.11ac 20MHz U-NII Band II-C	5500 – 5700
	IEEE 802.11a / IEEE 802.11n 5GHz 20MHz U-NII Band III IEEE 802.11ac 20MHz U-NII Band III	5745 – 5825
	IEEE 802.11n 5GHz 40MHz U-NII Band I IEEE 802.11ac 40MHz U-NII Band I	5190 – 5230
	IEEE 802.11n 5GHz 40MHz U-NII Band II-A IEEE 802.11ac 40MHz U-NII Band II-A	5270 – 5310
	IEEE 802.11n 5GHz 40MHz U-NII Band II-C IEEE 802.11ac 40MHz U-NII Band II-C	5510 – 5670
	IEEE 802.11n 5GHz 40MHz U-NII Band III IEEE 802.11ac 40MHz U-NII Band III	5755 – 5795
	IEEE 802.11ac 80MHz U-NII Band I	5210
	IEEE 802.11ac 80MHz U-NII Band II-A	5290
	IEEE 802.11ac 80MHz U-NII Band II-C	5530 - 5610
	IEEE 802.11ac 80MHz U-NII Band III	5775

天 線 資 訊	型 態	增益值(dBi)	
		2.4GHz	5GHz
	PCB Antenna	-2.9	1.3
R F 最大輸出功率	Mode	Power	
	IEEE 802.11b	20.31 dBm	0.107 W
	IEEE 802.11g	25.05 dBm	0.320 W
	IEEE 802.11n 2.4GHz 20MHz	24.19 dBm	0.262 W
	IEEE 802.11a U-NII Band I	16.62 dBm	45.92 mW
	IEEE 802.11a U-NII Band II-A	16.57 dBm	45.39 mW
	IEEE 802.11a U-NII Band II-C	16.18 dBm	41.50 mW
	IEEE 802.11a U-NII Band III	13.62 dBm	23.01 mW
	IEEE 802.11ac 20MHz U-NII Band I	16.43 dBm	43.95 mW
	IEEE 802.11ac 20MHz U-NII Band II-A	15.86 dBm	38.55 mW
	IEEE 802.11ac 20MHz U-NII Band II-C	15.91 dBm	38.99 mW
	IEEE 802.11ac 20MHz U-NII Band III	13.16 dBm	20.70 mW
	IEEE 802.11ac 40MHz U-NII Band I	12.11 dBm	16.26 mW
	IEEE 802.11ac 40MHz U-NII Band II-A	11.73 dBm	14.89 mW
	IEEE 802.11ac 40MHz U-NII Band II-C	11.65 dBm	14.62 mW
	IEEE 802.11ac 40MHz U-NII Band III	13.26 dBm	21.18 mW
	IEEE 802.11ac 80MHz U-NII Band I	10.62 dBm	11.53 mW
	IEEE 802.11ac 80MHz U-NII Band II-A	10.65 dBm	11.61 mW
	IEEE 802.11ac 80MHz U-NII Band II-C	10.61 dBm	11.51 mW
	IEEE 802.11ac 80MHz U-NII Band III	13.15 dBm	20.65 mW

輸出/輸入埠說明：

輸 出 / 入 埠		數量	介面內容說明
1	Signal Port	1	連接至治具

待測設備外圍說明：

電 源 線 類 別	本產品透過治具供電。
附 屬 裝 置	無

1.2 其他相關聲明

本測試報告屬(以下選擇一種打■)

☒	新設計之機型,申請新的型式檢驗認可的測試.
☐	已取得型式檢驗認可之商品,因設計變更而重新測試. 登錄號碼: XXXXXXXX

2. 量測儀器及測試配置說明

2.1 量測設備

For Conducted

Test Period: Jun. 12 ~ Jun. 22, 2018

名稱	廠牌	型號	序號	本次校驗日期	校驗年限
Spectrum Analyzer	Agilent	N9020A	US47520902	09/21/2017	1 year
Power Sensor	Agilent	N1921A	MY45241957	12/07/2017	1 year
Power Meter	Agilent	N1911A	MY45101619	12/07/2017	1 year
Power Supply	KEITHLEY	2303	4045290	02/08/2018	1 year


For Radiated Emissions

Test Period: Jun. 08 ~ Jun. 15, 2018

名稱	廠牌	型號	序號	本次校驗日期	校驗年限
EXA Signal Analyzer	Keysight	N9010A	MY52221312	01/15/2018	1 year
Amplifier	Agilent	8449B	3008A02237	10/16/2017	1 year
Amplifier	Agilent	8447D	2944A11119	01/10/2018	1 year
天線	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	416	10/26/2017	1 year
天線	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/20/2017	1 year
天線	ETS	3116	86467	09/19/2017	1 year

2.2 檢驗系統示意圖

輻射干擾測試配置

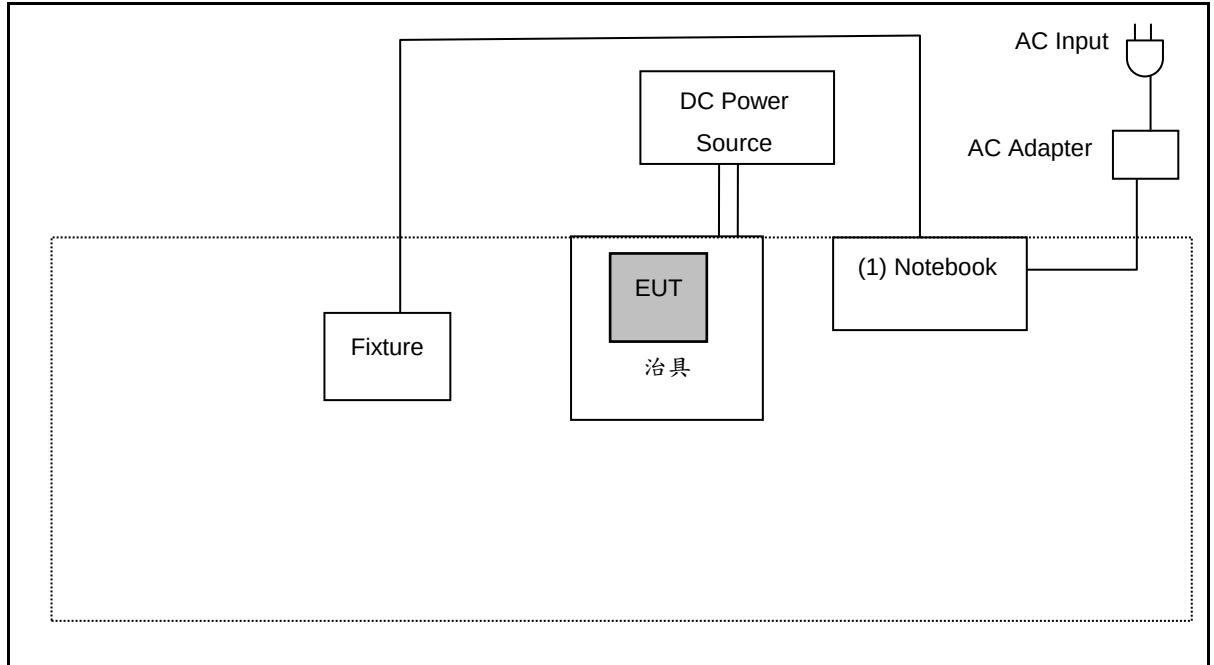

2.3 輔助測試之週邊設備描述

下列輔助設備或配件為測試中所使用，以形成一個代表性的受測系統。

週邊名稱		商標	型 號	序 號	電 源 線	備註
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	Non-shielded, 1m	---

2.4 測試模式

Pre-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode
Mode 5: IEEE 802.11a Continuous TX Mode
Mode 6: IEEE 802.11ac 20MHz Continuous TX Mode
Mode 7: IEEE 802.11ac 40MHz Continuous TX Mode
Mode 8: IEEE 802.11ac 80MHz Continuous TX Mode
Mode 9: Receiver Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode
Mode 5: IEEE 802.11a Continuous TX Mode
Mode 6: IEEE 802.11ac 20MHz Continuous TX Mode
Mode 7: IEEE 802.11ac 40MHz Continuous TX Mode
Mode 8: IEEE 802.11ac 80MHz Continuous TX Mode
Mode 9: Receiver Mode

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimun VBW (kHz)
Mode 2: IEEE 802.11b Continuous TX Mode	2412.0	8.625	8.700	0.991	0.038	0.010
Mode 3: IEEE 802.11g Continuous TX Mode	2412.0	1.440	1.530	0.941	0.263	0.694
Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode	2412.0	1.345	1.440	0.934	0.296	0.743
Mode 5: IEEE 802.11a Continuous TX Mode	5180.0	1.450	1.530	0.948	0.233	0.690
Mode 6: IEEE 802.11ac 20MHz Continuous TX Mode	5180.0	1.350	1.430	0.944	0.250	0.741
Mode 7: IEEE 802.11ac 40MHz Continuous TX Mode	5190.0	0.675	0.765	0.882	0.544	1.481
Mode 8: IEEE 802.11ac 80MHz Continuous TX Mode	5210.0	0.078	0.171	0.456	3.409	12.821

Mode 2: IEEE 802.11b Continuous TX Mode


On time



On+off time

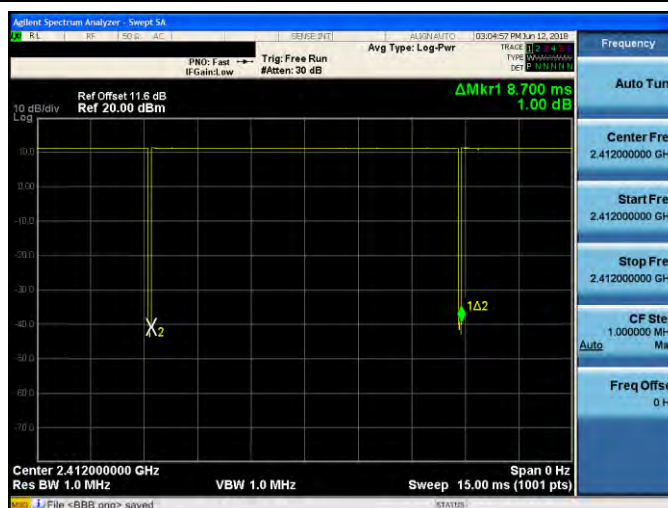



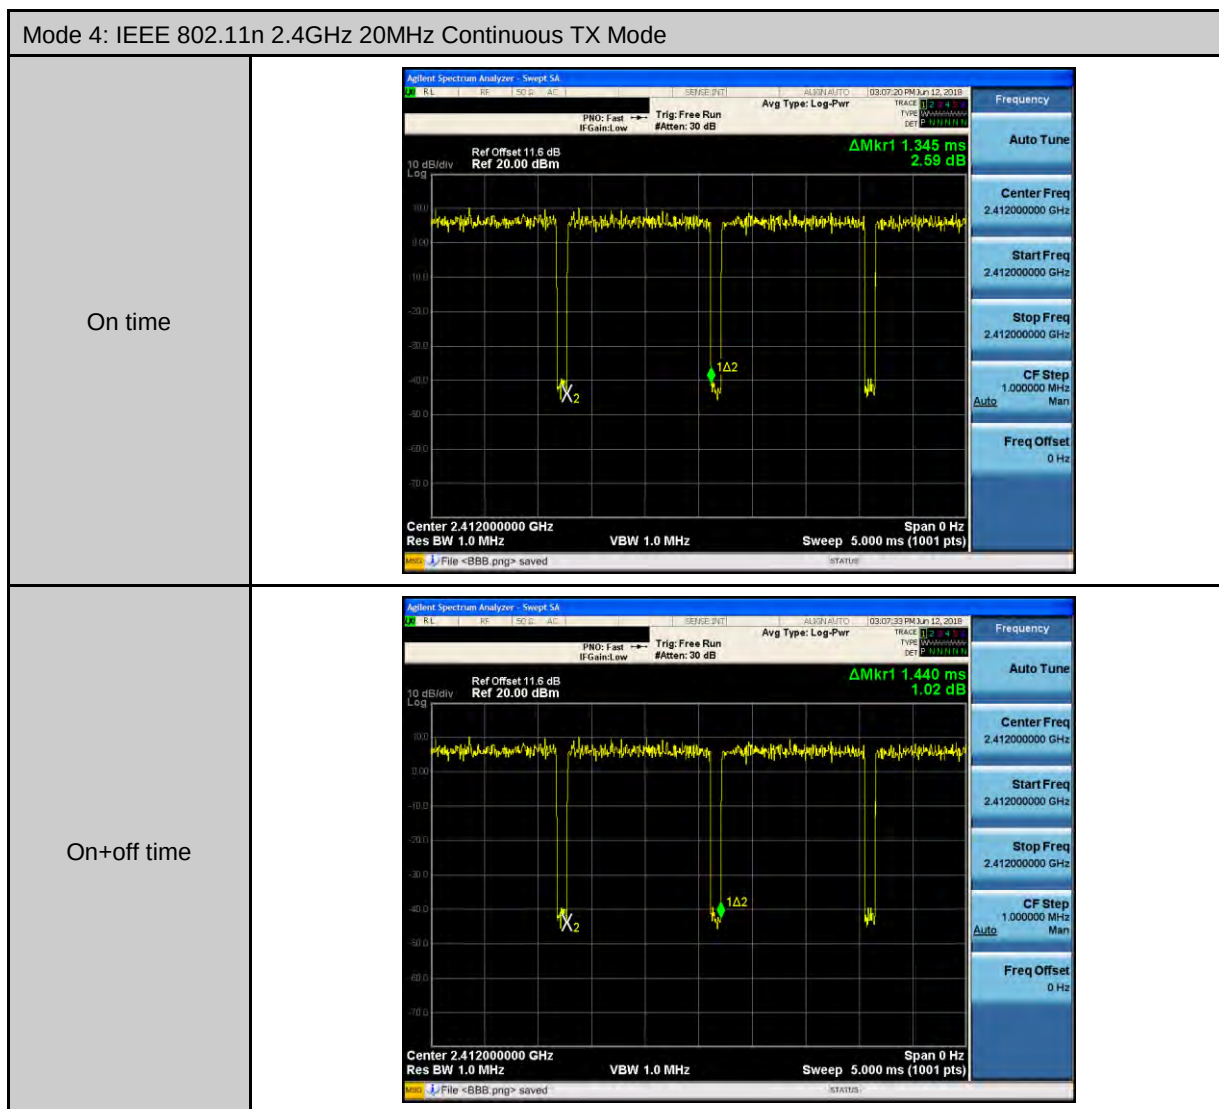









2.5 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power		+0.27 dB / -0.28 dB
RF Bandwidth		4.96%
Power Spectral Density		+0.71 dB / -0.77 dB
Frequency Stability		+ 2.212 x 10 ⁻⁷ % / - 2.170 x 10 ⁻⁷ %
Duty Cycle		1.06%
Time Occupancy		1.40%

2.6 試驗環境

產品測試時之實驗室環境條件如下：

項 目	測 試 項 目	需 求	實 際
溫度 Temperature (°C)	LP0002	10 - 40	26
濕度 Humidity (%RH)		10 - 90	60

中華民國實驗室認證體系

認可編號: 1330

測試實驗室名稱：晶復科技股份有限公司

TEL: 886-3-2710188 / FAX: 886-3-2710190

傳導干擾電壓量測地點：桃園市八德區長安街 140-1 號.

輻射干擾場強量測地點：桃園市八德區長安街 140-1 號.

3. 測試項目與結果判定總表

本測試報告之所有項目皆依據 NCC 低功率射頻電機技術規範(LP0002)之檢驗法。

2.4GHz 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻電機技術規範 2.3 節	請參閱 4.1 節	請參閱 2.1 節	不適用
2	場強輻射	低功率射頻電機技術規範 2.8 節、2.9 節、3.10.1.5.(1)節	請參閱 4.2.1 節	請參閱 2.1 節	合格
3	頻帶邊緣外之輻射發射	低功率射頻電機技術規範 3.10.1.5.(1)節	請參閱 4.2.1 節	請參閱 2.1 節	合格
4	峰值傳導輸出功率	低功率射頻電機技術規範 3.10.1.2(1)(C)節	請參閱 4.2.2 節	請參閱 2.1 節	合格
5	天線規格	低功率射頻電機技術規範 3.10.1.3(3)、3.10.1.4 節	請參閱 4.2.3 節	-----	合格
6	非必要頻帶	低功率射頻電機技術規範 3.10.1.5(1)節	請參閱 4.2.4 節	請參閱 2.1 節	合格
7	6dB 頻寬	低功率射頻電機技術規範 3.10.1.6(2)(A)節	請參閱 4.2.5 節	請參閱 2.1 節	合格
8	峰值發射功率頻譜密度	低功率射頻電機技術規範 3.10.1.6(2)(B)節	請參閱 4.2.6 節	請參閱 2.1 節	合格
9	電波暴露量之評估	低功率射頻電機技術規範 5.20.2.1 節、5.20.2.2 節	請參閱 4.2.7 節	請參閱 2.1 節	合格

5GHz U-NII 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻電機技術規範 2.3 節	請參閱 4.1 節	請參閱 2.1 節	不適用
2	場強輻射	低功率射頻電機技術規範 2.8 節、2.9 節	請參閱 4.3.1 節	請參閱 2.1 節	合格
3	頻帶邊緣外之輻射發射	低功率射頻電機技術規範 2.7、4.7.4 節	請參閱 4.3.1 節	請參閱 2.1 節	合格
4	非必要頻帶	低功率射頻電機技術規範 4.7.4 節	請參閱 4.3.1 節	請參閱 2.1 節	合格
5	峰值發射功率	低功率射頻電機技術規範 4.7.3.1、4.7.3.2、4.7.3.3 節	請參閱 4.3.2 節	請參閱 2.1 節	合格
6	峰值功率頻譜密度	低功率射頻電機技術規範 4.7.3.1、4.7.3.2、4.7.3.3 節	請參閱 4.3.3 節	請參閱 2.1 節	合格
7	26dB 頻寬之要求	N/A	請參閱 4.3.4 節	請參閱 2.1 節	----
8	6dB 頻寬之要求	低功率射頻電機技術規範 4.7.5 節	請參閱 4.3.5 節	請參閱 2.1 節	合格
9	發射功率控制(TPC)	低功率射頻電機技術規範 4.7.7.1 節	請參閱 4.3.6 節	請參閱 2.1 節	合格
10	動態頻率選擇(DFS) 雷達偵測功能	低功率射頻電機技術規範 4.7.7.2 節	請參閱 4.3.7 節	請參閱 2.1 節	不適用
11	動態頻率選擇(DFS) 頻道可用性檢查時間	低功率射頻電機技術規範 4.7.7.2(3)節	請參閱 4.3.8 節	請參閱 2.1 節	不適用
12	動態頻率選擇(DFS) 頻道移動時間	低功率射頻電機技術規範 4.7.7.2(4)節	請參閱 4.3.9 節	請參閱 2.1 節	合格
13	動態頻率選擇(DFS) 不可佔用時間	低功率射頻電機技術規範 4.7.7.2(5)節	請參閱 4.3.10 節	請參閱 2.1 節	不適用
14	天線規格	低功率射頻電機技術規範 4.7.8 節	請參閱 4.3.11 節	-----	合格
15	電波暴露量之評估	低功率射頻電機技術規範 5.20.2.1 節、5.20.2.2 節	請參閱 4.3.12 節	請參閱 2.1 節	合格

4. 測試項目表列

4.1 電源線傳導干擾之量測

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 2.3 節，以市電為電源之低功率射頻電機，其傳導回電源線上頻率自 150 kHz 至 30MHz 之射頻電壓（在電源端子每一電源線對接地點）不得超過下表所列之限值。測量時應經過 50Ω/50μH 之電源線阻抗模擬網路 (LISN)。頻率重疊處，以較低限值為準。

Frequency (MHz)	傳導限制值 (dBuV)	
	準峰值 (Quasi – peak)	平均值 (Average)
0.15 – 0.5	66 - 56 (註)	56 - 46 (註)
0.5 – 5	56	46
5 - 30	60	50

註：隨頻率之對數遞減。

測試方法：

測試場地為標準傳導測試場地。將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15MHz 至 30MHz 之間之電源線傳導放射強度。


干擾值之計算

電源傳導干擾電壓之計算公式如下

結果值 = 儀器讀值(QP/AV) + 校正因子

其中校正因子為：饋線損失 + 電源阻抗模擬網路損失

測試架構圖：

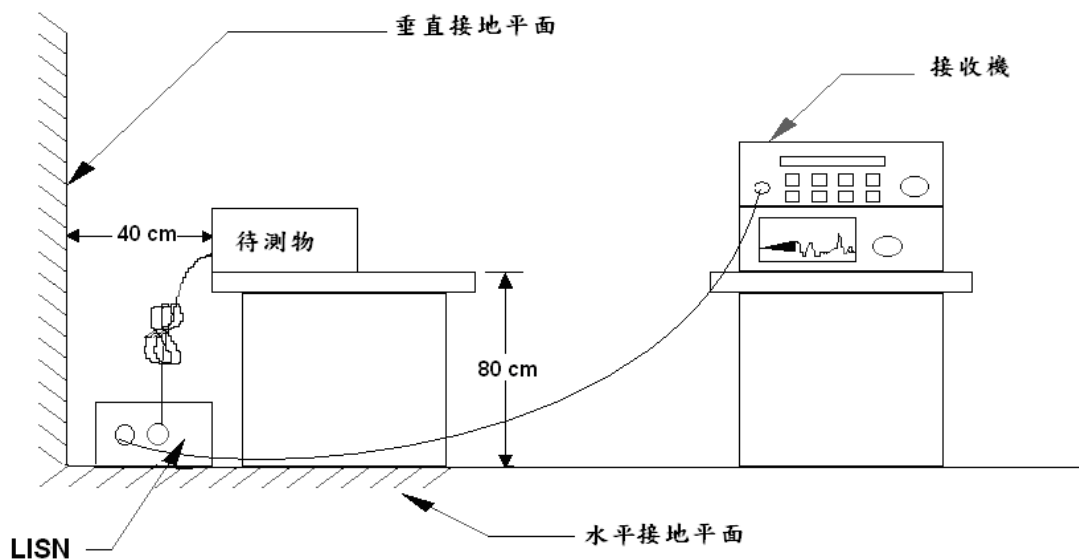

測試結果: 不適用，此產品透過 DC 電源供電。

4.2 2.4GHz 檢驗項目

4.2.1 場強輻射之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之使用頻帶範圍外之任意 100 千赫 (kHz)內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫(kHz)內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.2(1)(C)之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。

依據 NCC 低功率射頻電機技術規範第 2.7 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1785.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1888.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2010.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2110.0~2170.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻電機技術規範第 2.8 節之規定,除本規範各章節另有放寬規定者外,其電場強度不得超過下表之限值,且其不必要之發射皆不得大於主波發射強度。各頻段重疊處,以較嚴格之限制值為準。

頻 率 (MHz)	電場強度 (μ V/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

測試方法：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面,使其在工作狀態,接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置,而且桌面要 360 度旋轉,另外接收天線也要從 1.0 米至 4.0 米升降變化,以找出最大的輻射電場強度,接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1GHz 以下之測試配置

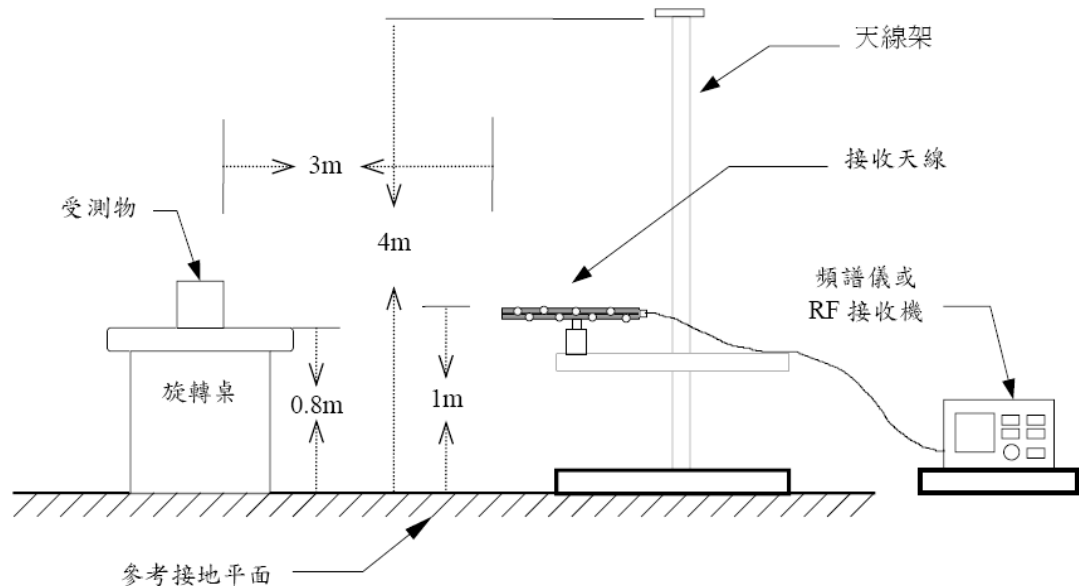

量測頻率高於 1GHz 以上之測試配置

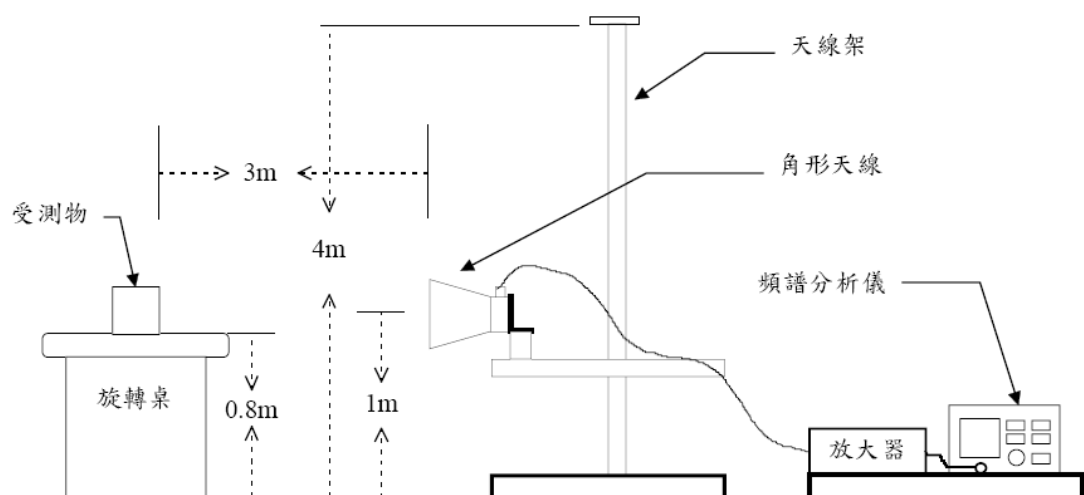


測試結果：

本產品透過預測試確認 X、Y 和 Z 個軸中最差之結果軸向為 X 軸，因此場強輻射完整測試 X 軸並將其結果記錄於報告中。

場強輻射之量測依據輸出峰值功率之量測結果取其最大值之操作模式為場強輻射測試模式。

其它不必要之訊號 (1GHz 以下)

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Horizontal		

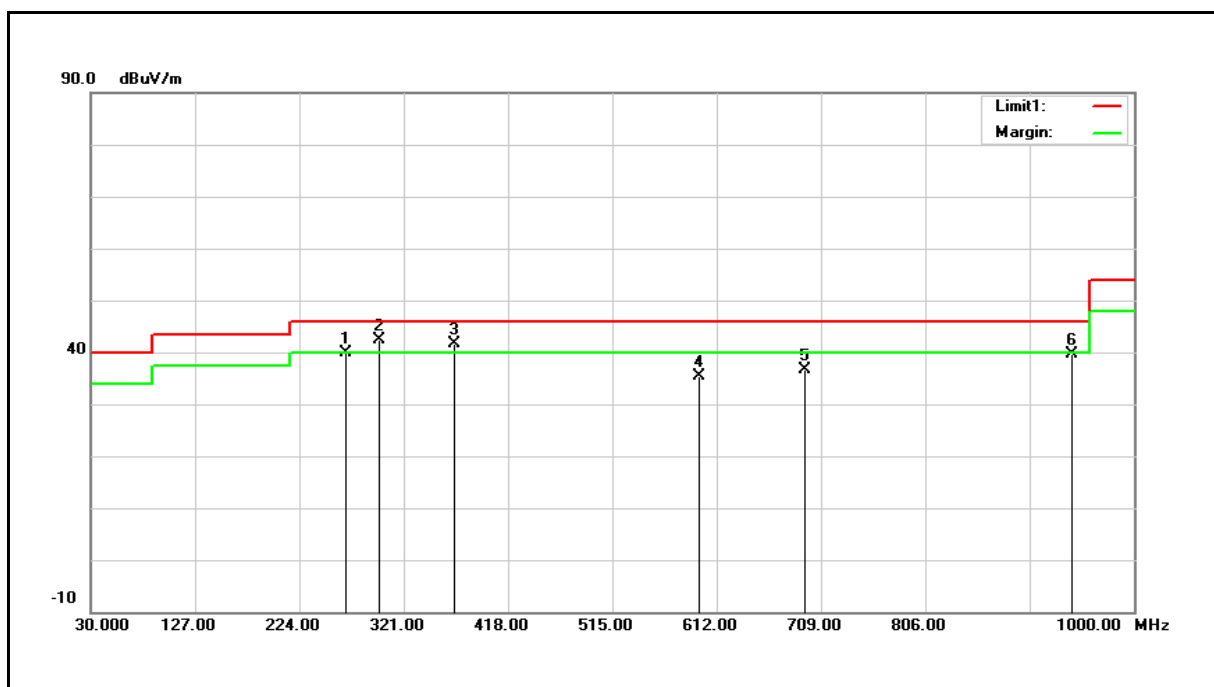


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	266.6800	44.69	-4.93	39.76	46.00	-6.24	QP
2	297.7200	46.16	-3.76	42.40	46.00	-3.60	QP
3	368.5300	44.09	-2.50	41.59	46.00	-4.41	QP
4	595.5100	32.98	2.34	35.32	46.00	-10.68	QP
5	693.4800	32.50	4.10	36.60	46.00	-9.40	QP
6	942.7700	30.81	8.72	39.53	46.00	-6.47	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Vertical		

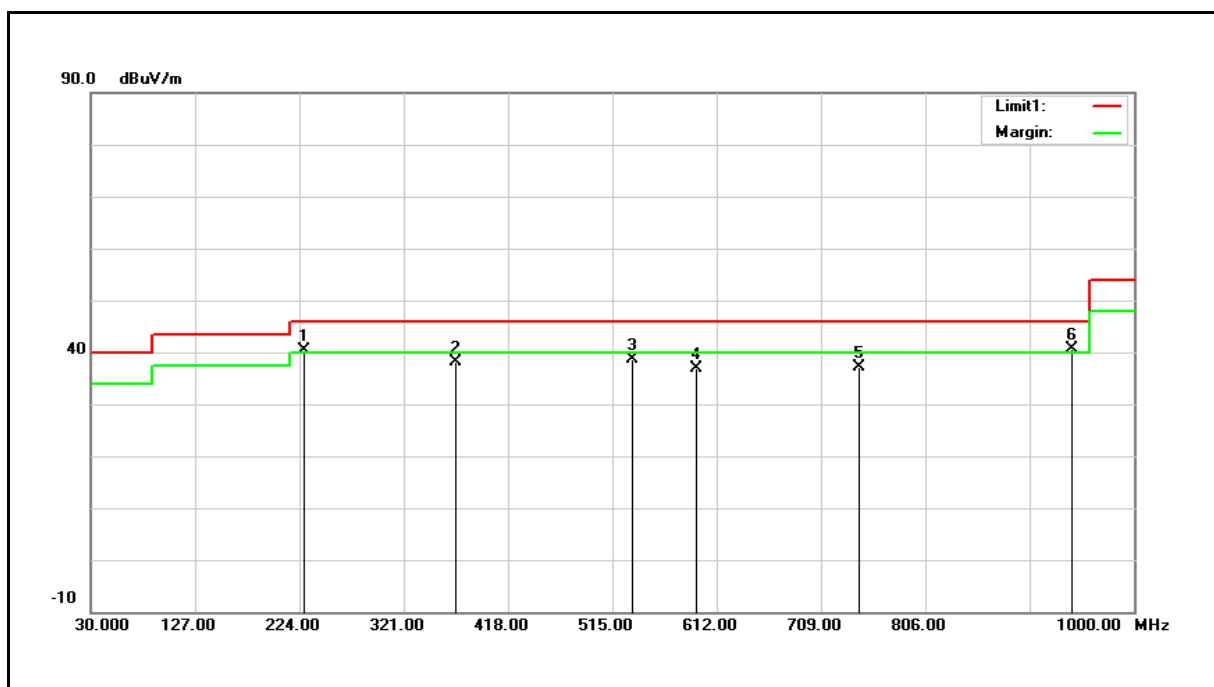

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	228.8500	47.38	-6.92	40.46	46.00	-5.54	QP
2	369.5000	40.49	-2.48	38.01	46.00	-7.99	QP
3	533.4300	37.82	0.76	38.58	46.00	-7.42	QP
4	592.6000	34.63	2.27	36.90	46.00	-9.10	QP
5	744.8900	31.62	5.42	37.04	46.00	-8.96	QP
6	942.7700	31.91	8.72	40.63	46.00	-5.37	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1GHz 以上)

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

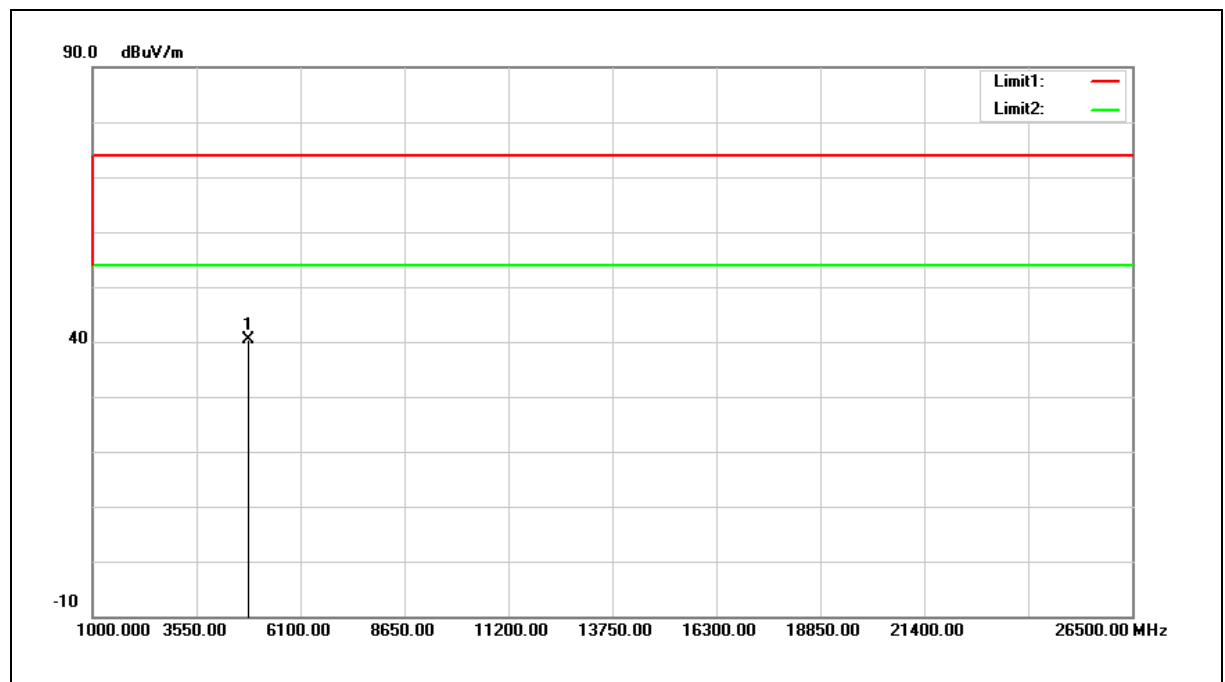


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.79	5.62	40.41	74.00	-33.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

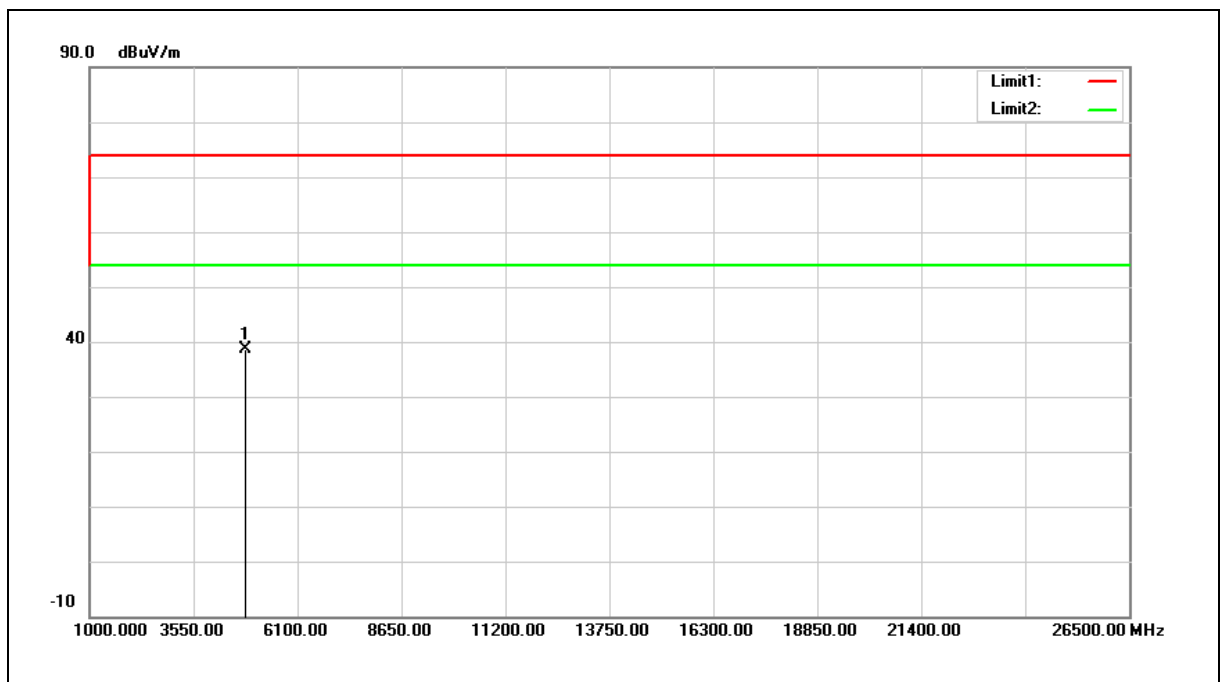


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.94	5.62	38.56	74.00	-35.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

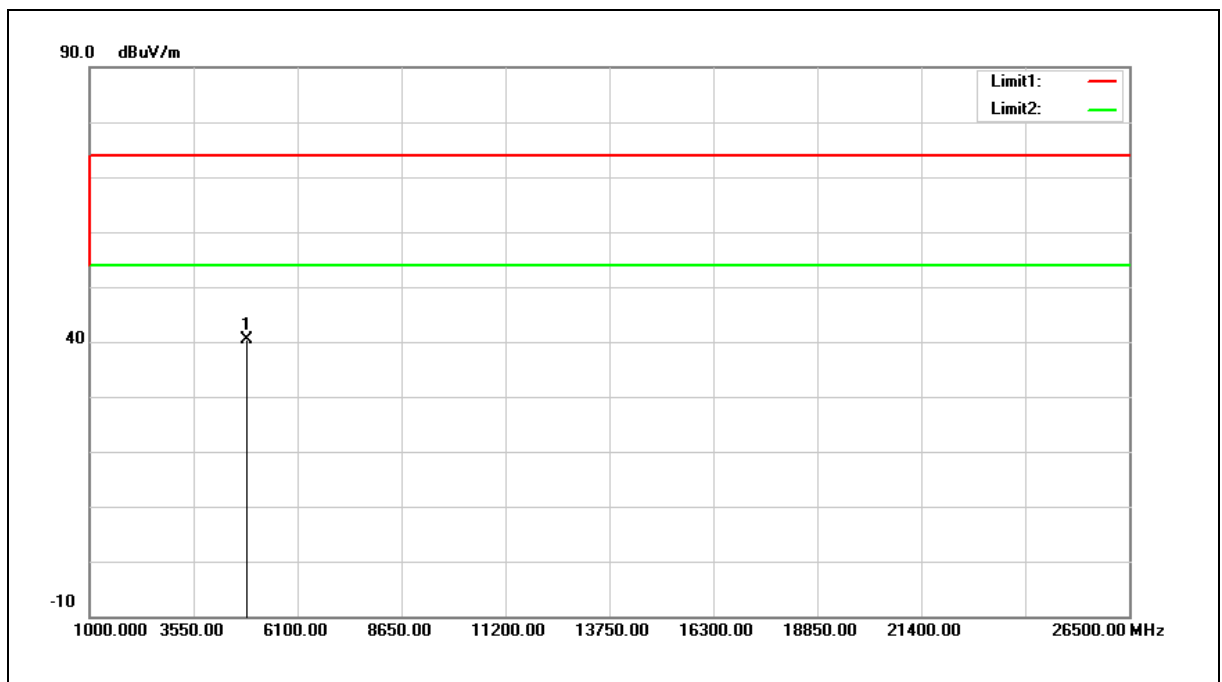


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.53	5.78	40.31	74.00	-33.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

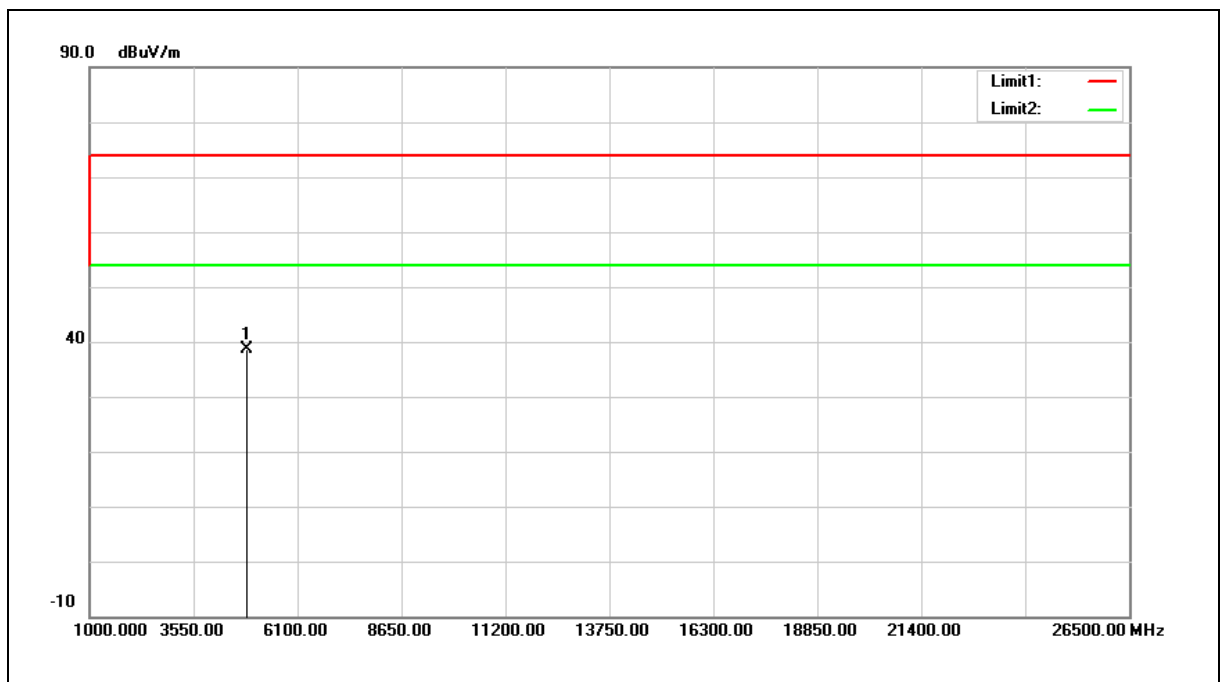


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.92	5.78	38.70	74.00	-35.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

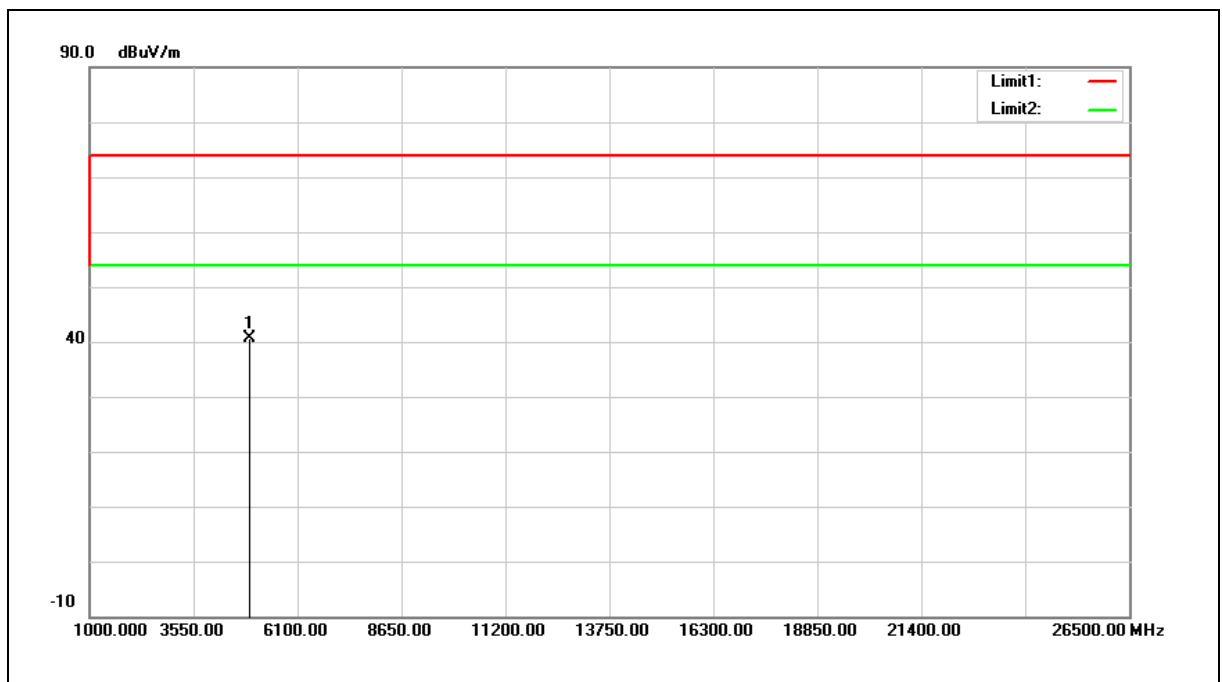


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.57	5.95	40.52	74.00	-33.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

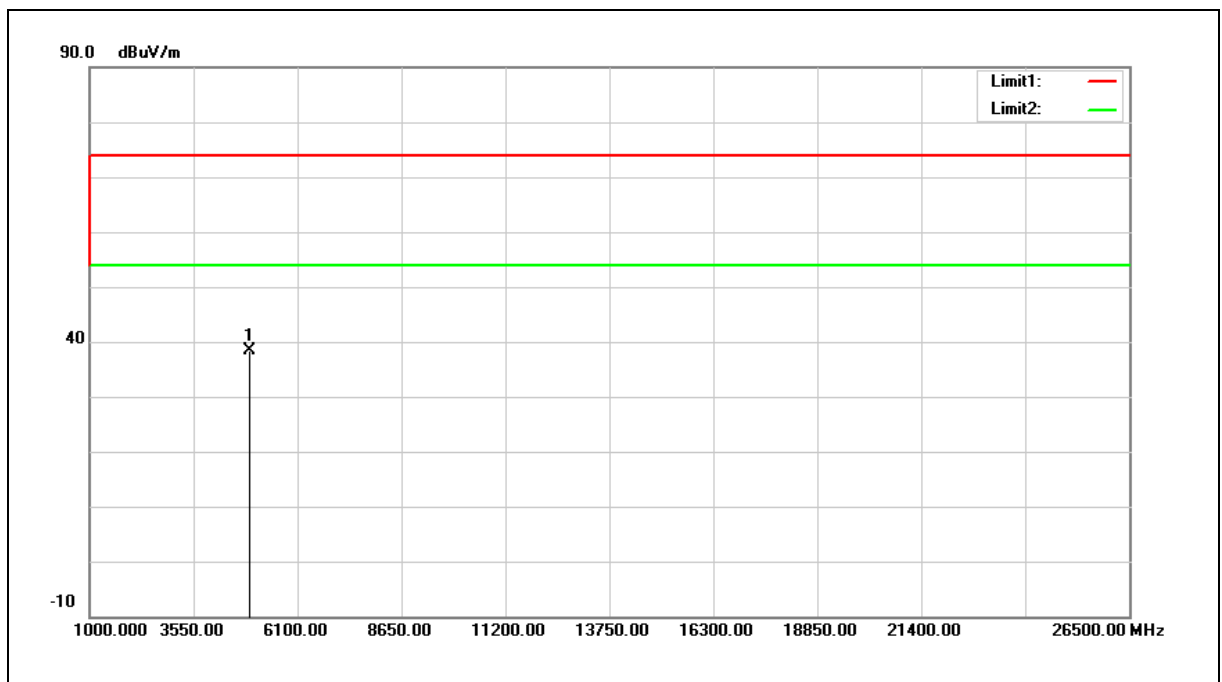


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	32.53	5.95	38.48	74.00	-35.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

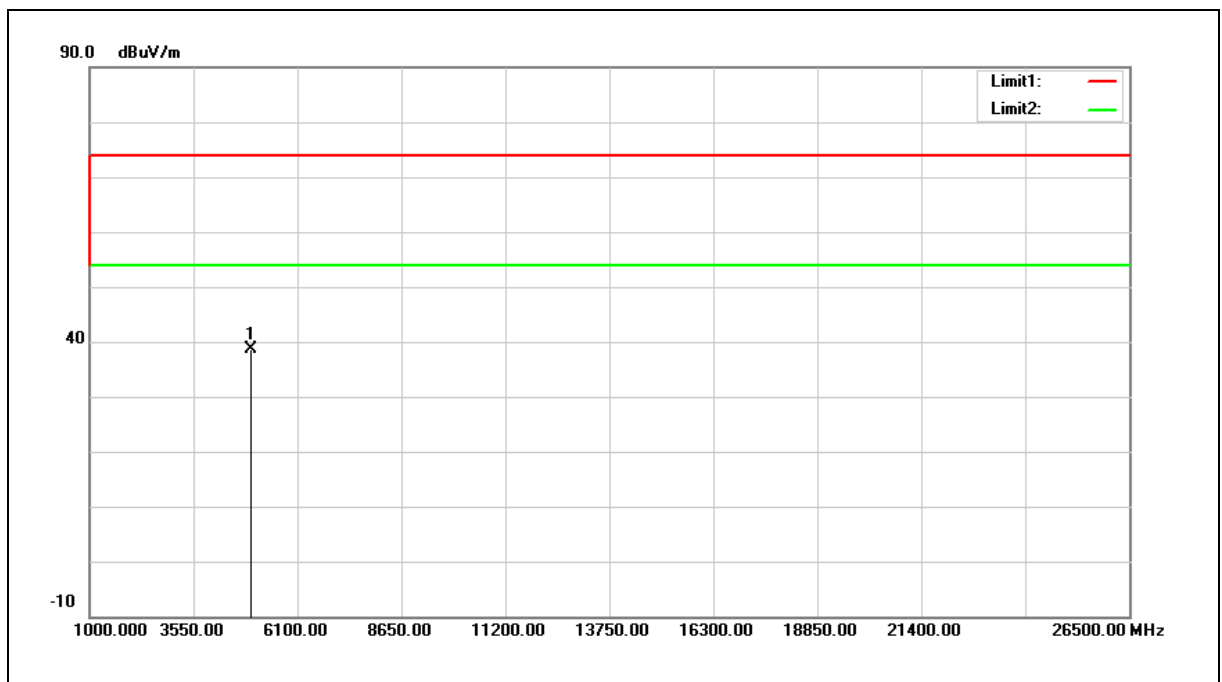


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	32.54	6.01	38.55	74.00	-35.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

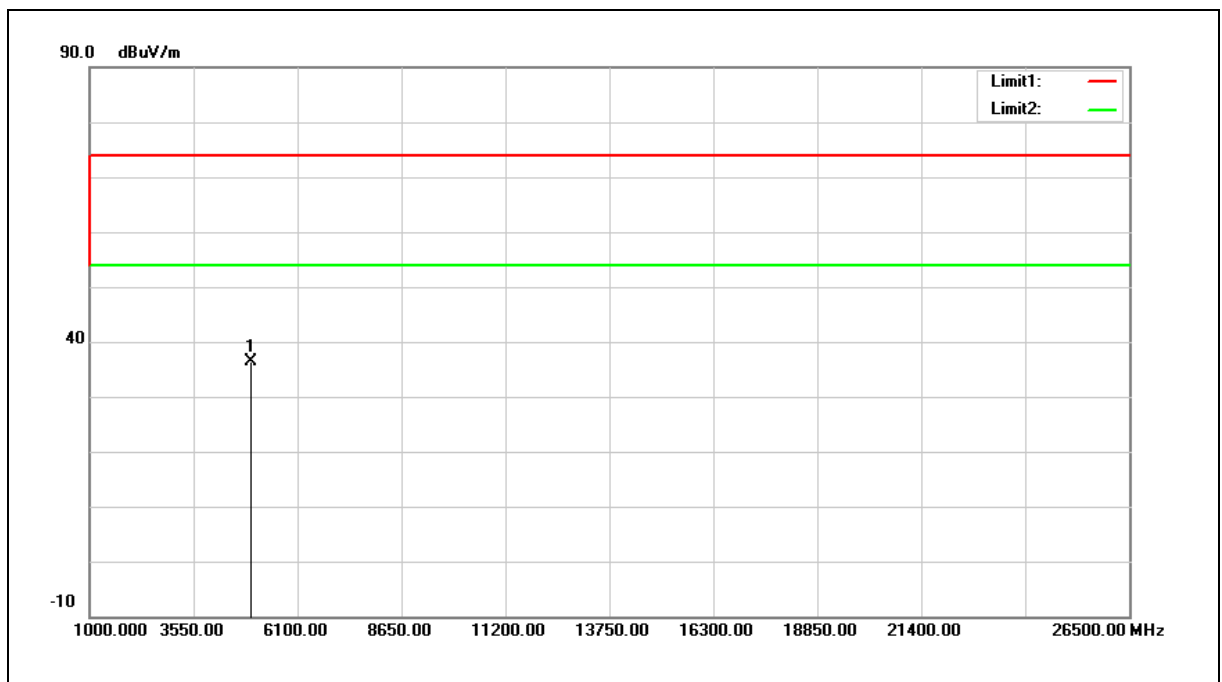


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	30.38	6.01	36.39	74.00	-37.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

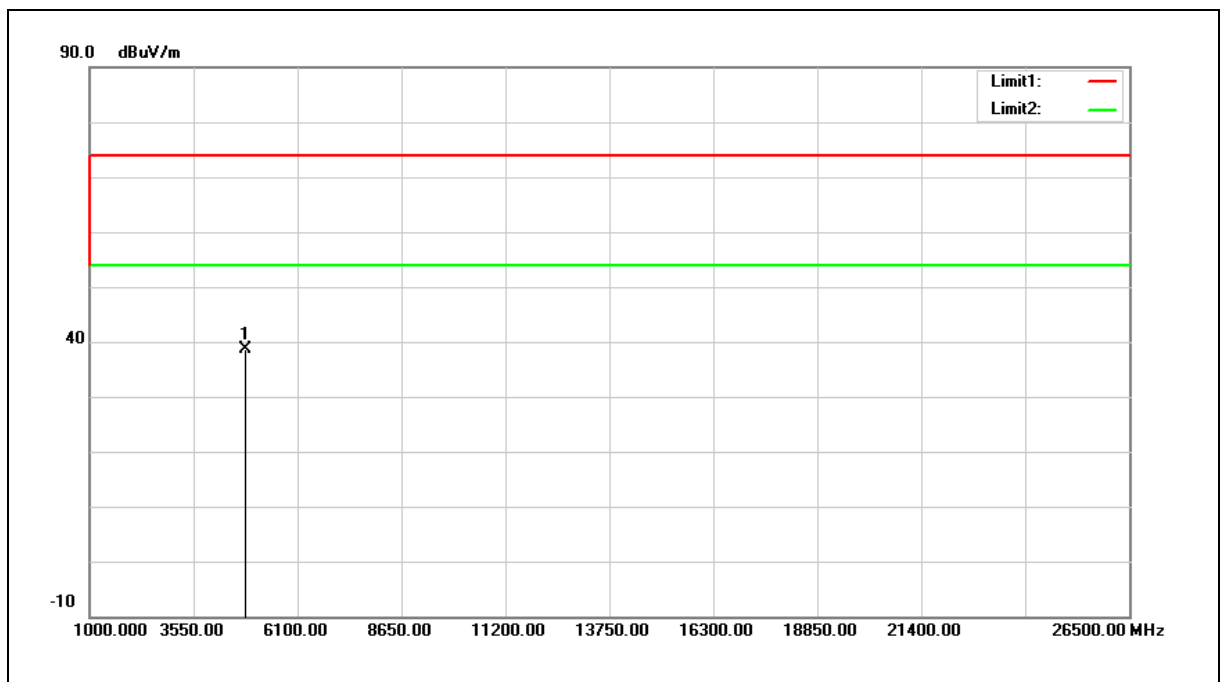


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.91	5.62	38.53	74.00	-35.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

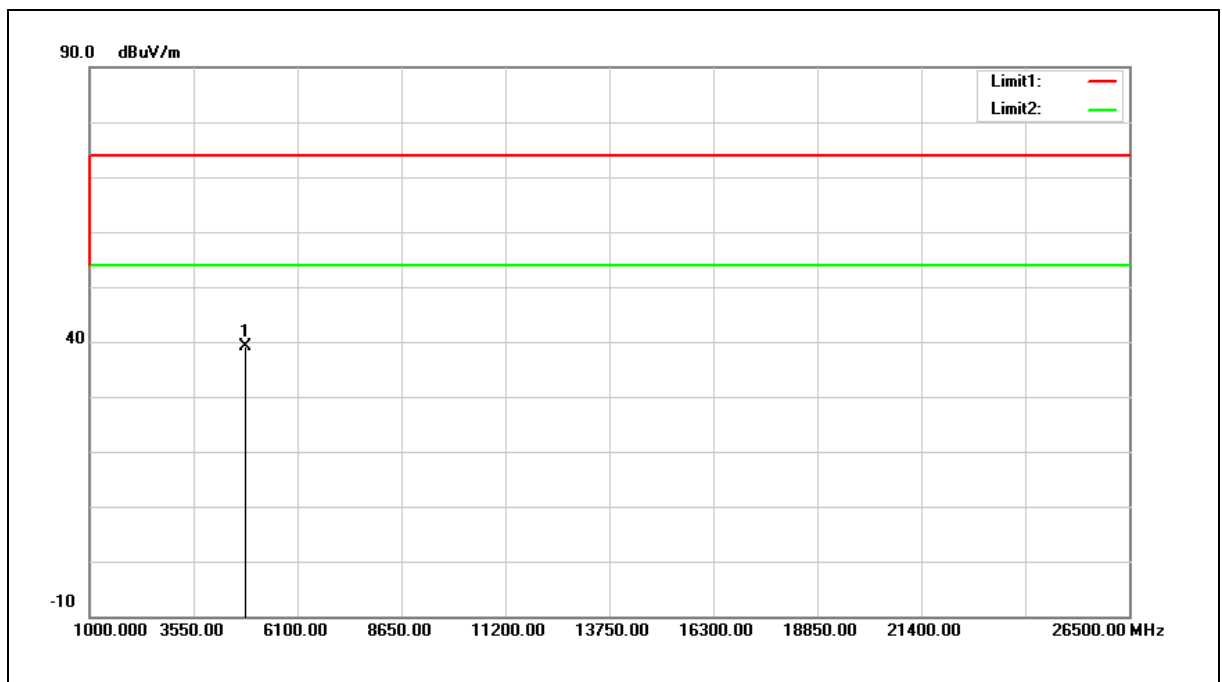


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	33.53	5.62	39.15	74.00	-34.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

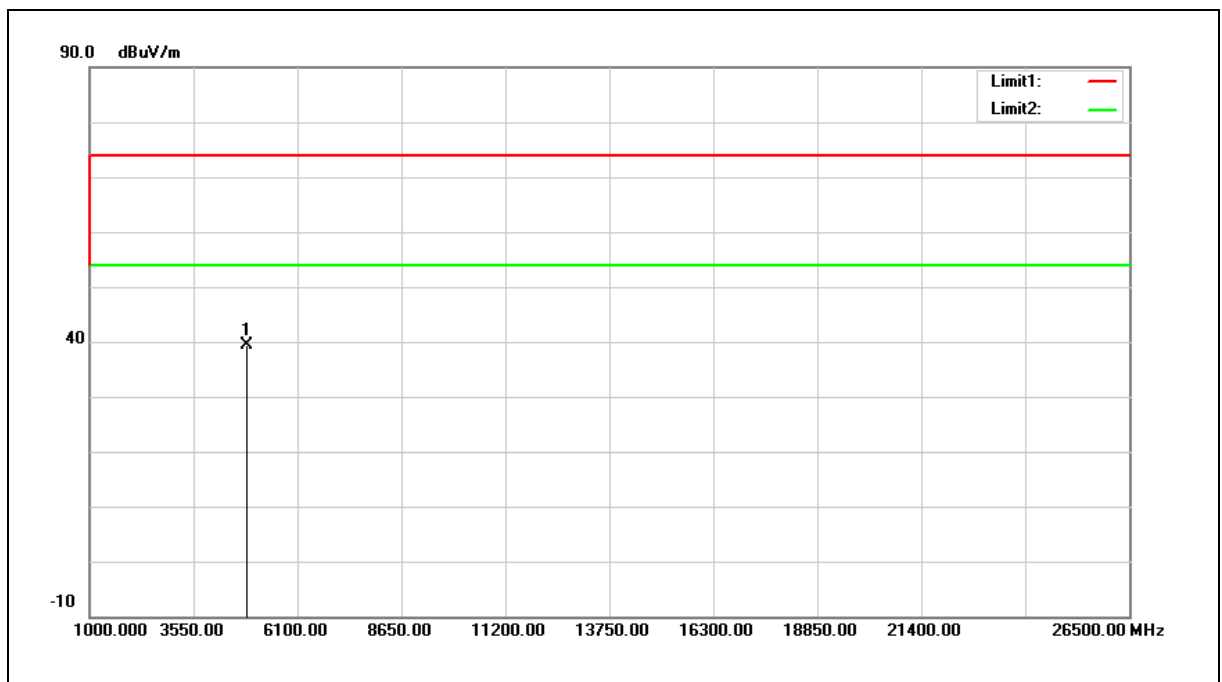


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	33.52	5.78	39.30	74.00	-34.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

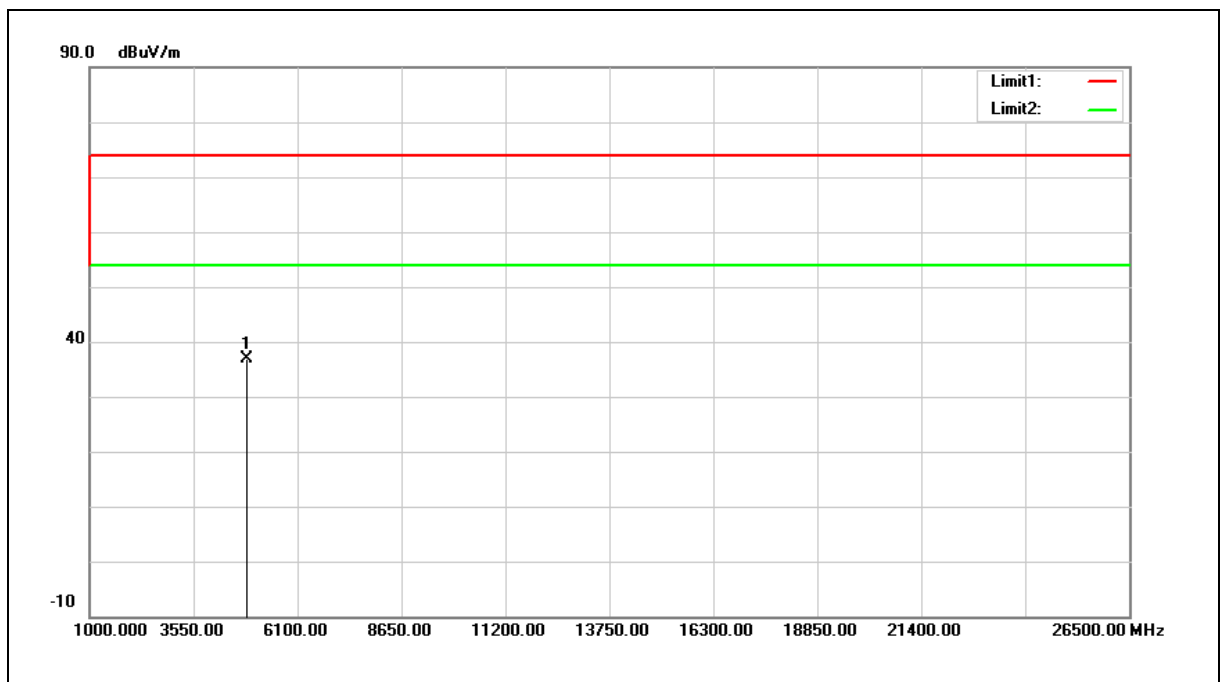


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	31.13	5.78	36.91	74.00	-37.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

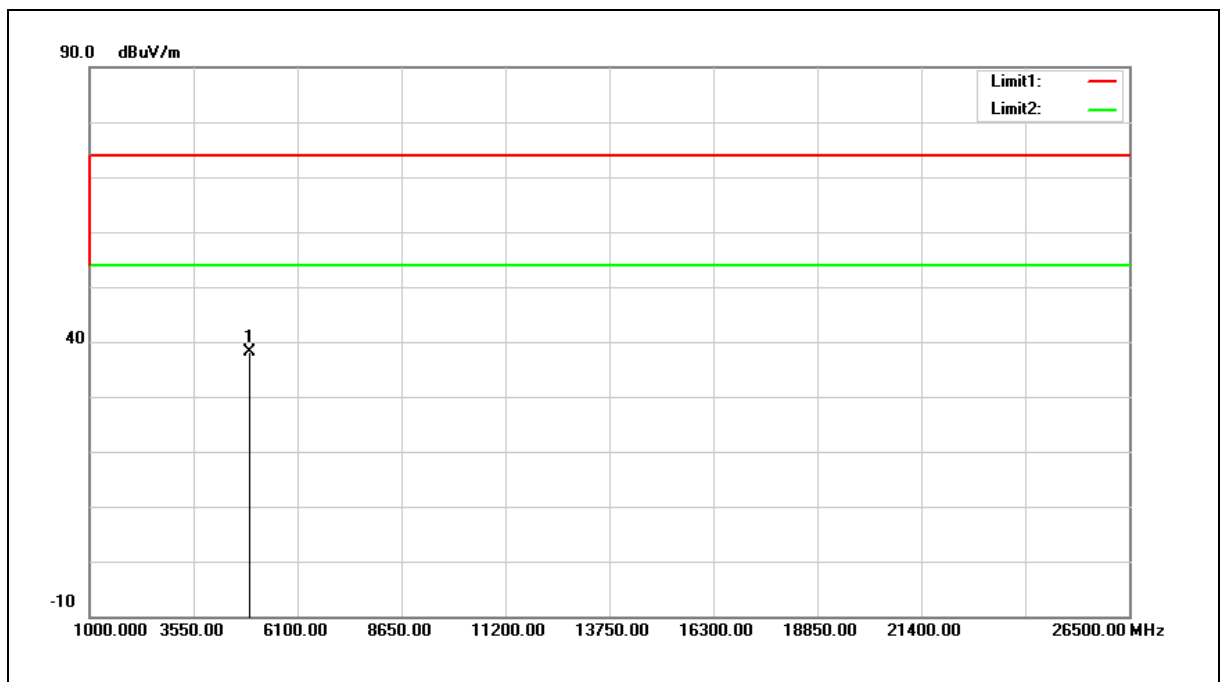


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	32.09	5.95	38.04	74.00	-35.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

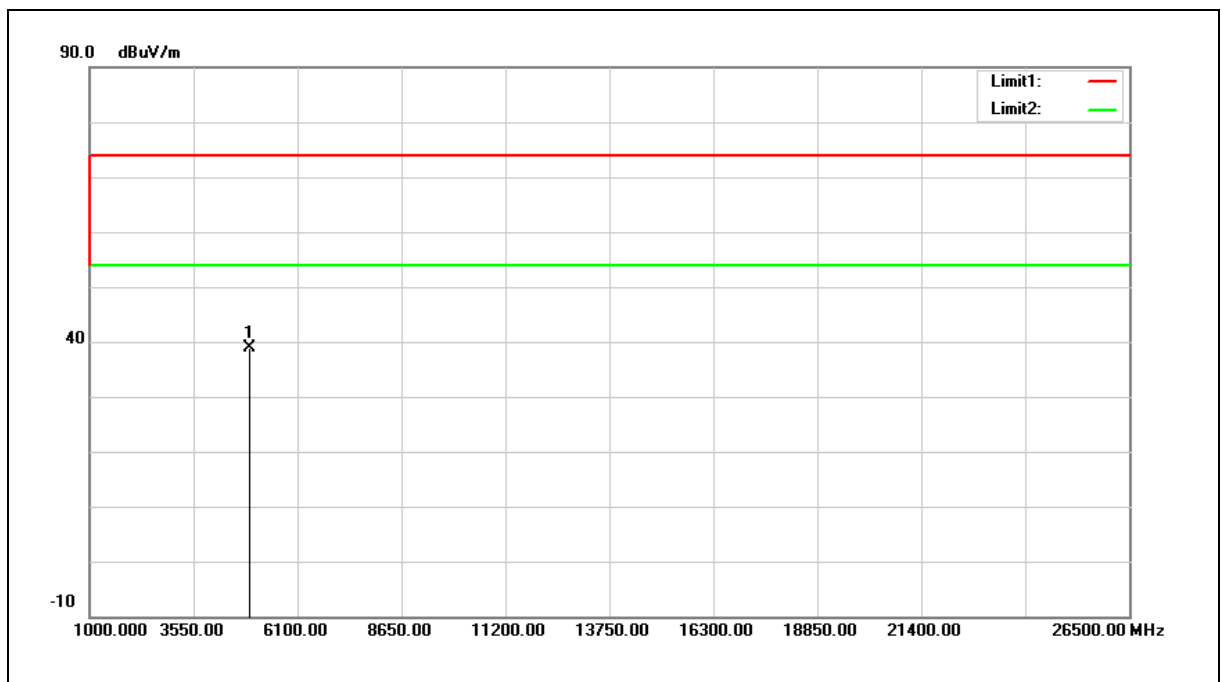


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	32.81	5.95	38.76	74.00	-35.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

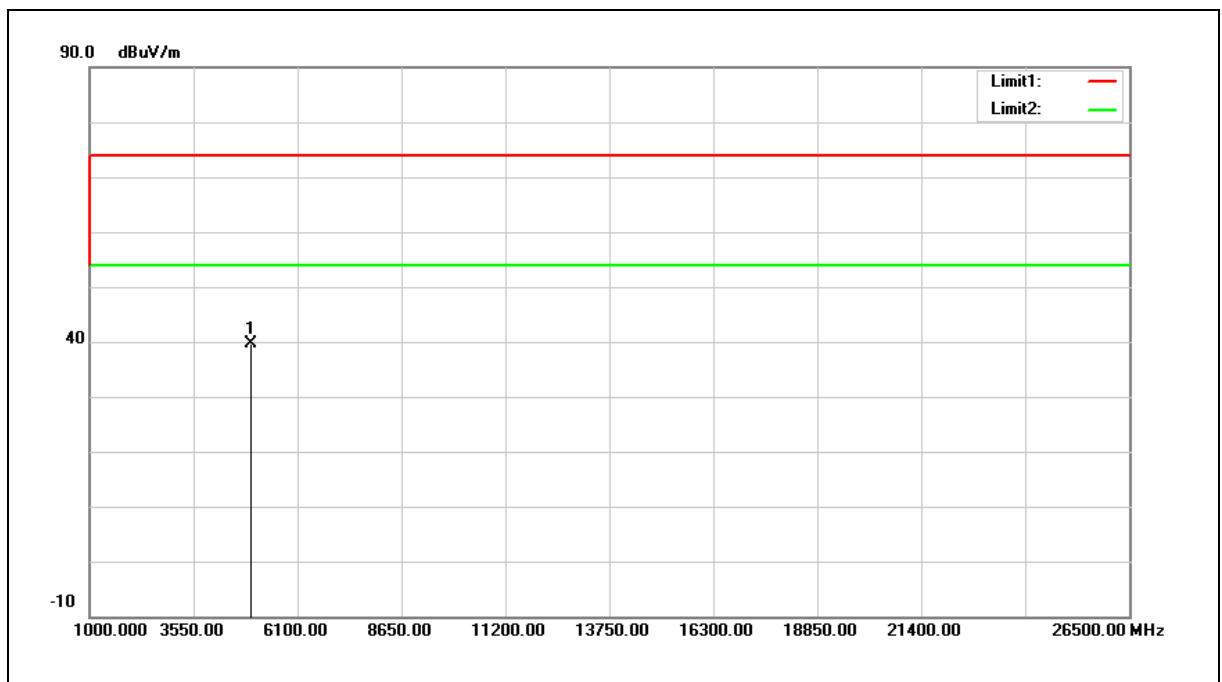


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	33.72	6.01	39.73	74.00	-34.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

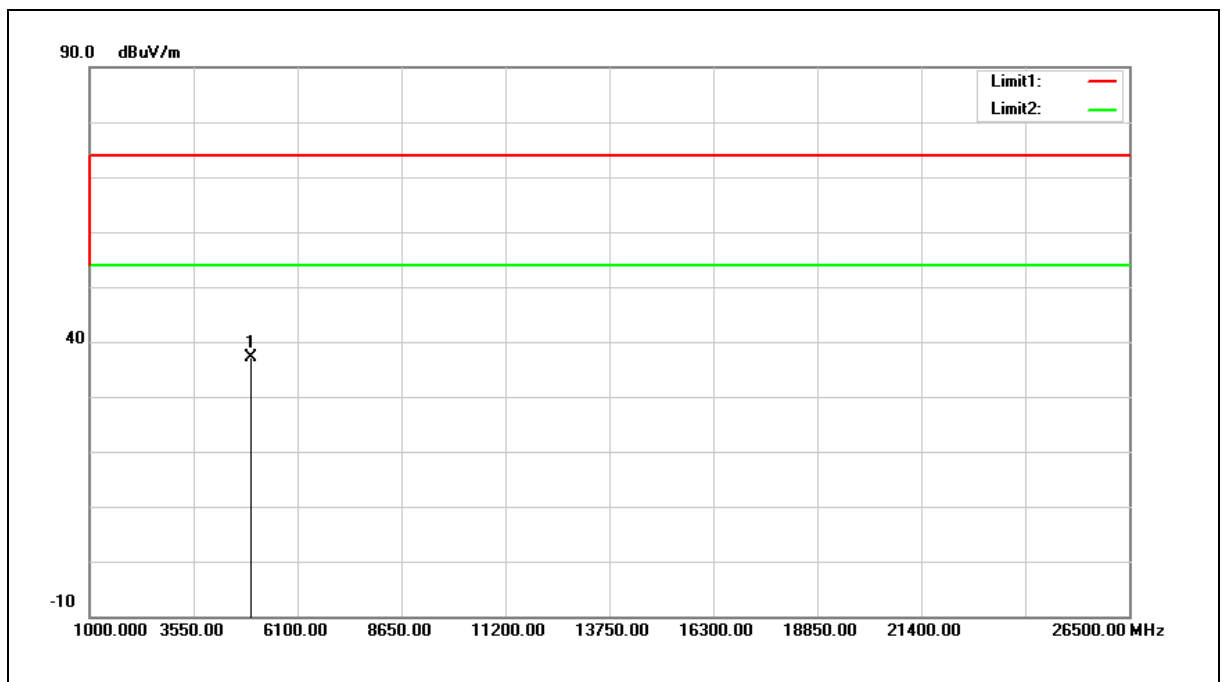


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	31.12	6.01	37.13	74.00	-36.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

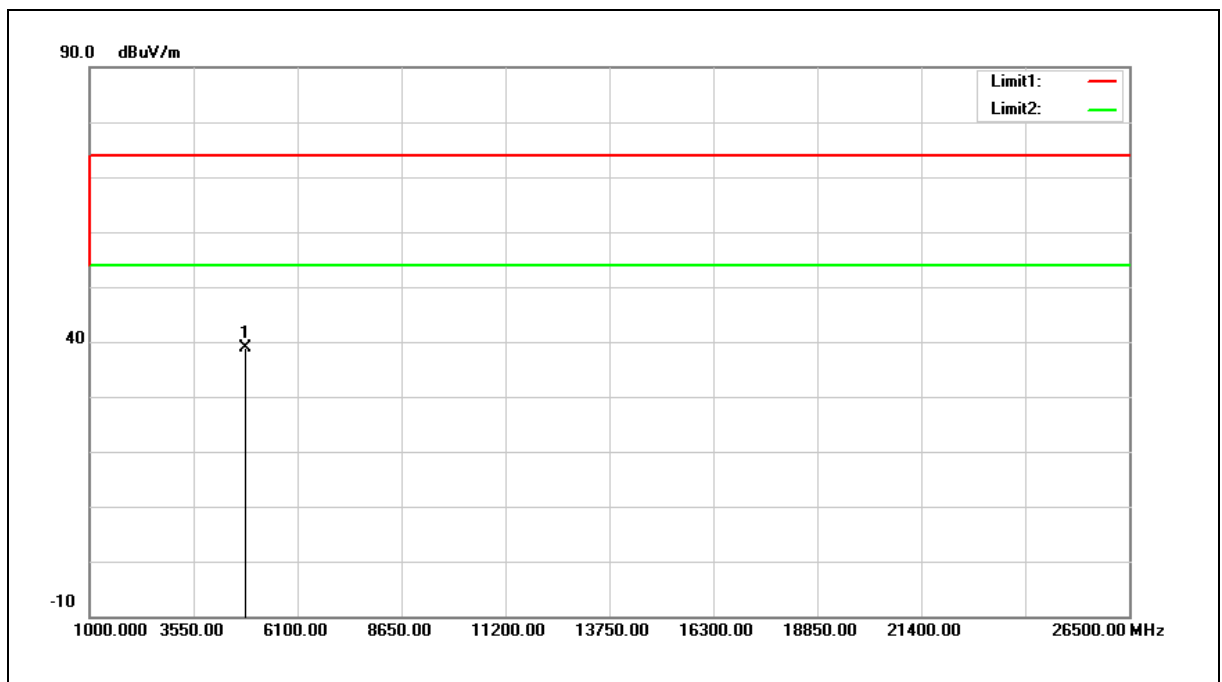


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	33.31	5.62	38.93	74.00	-35.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

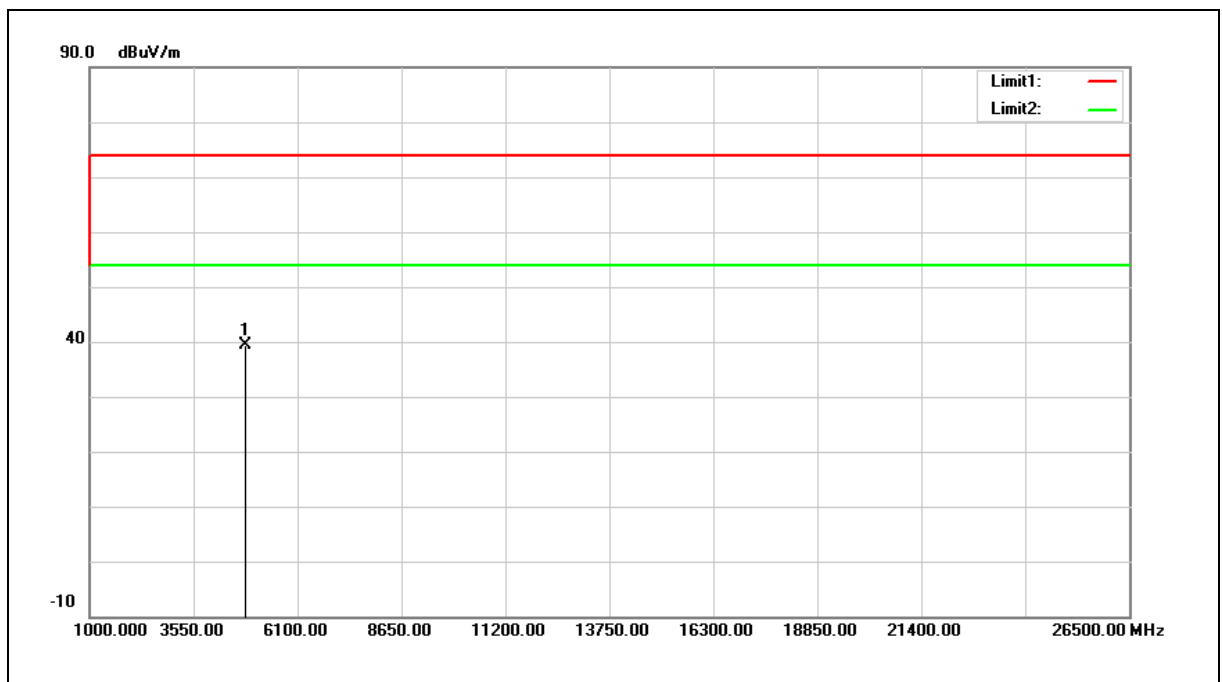


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	33.71	5.62	39.33	74.00	-34.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

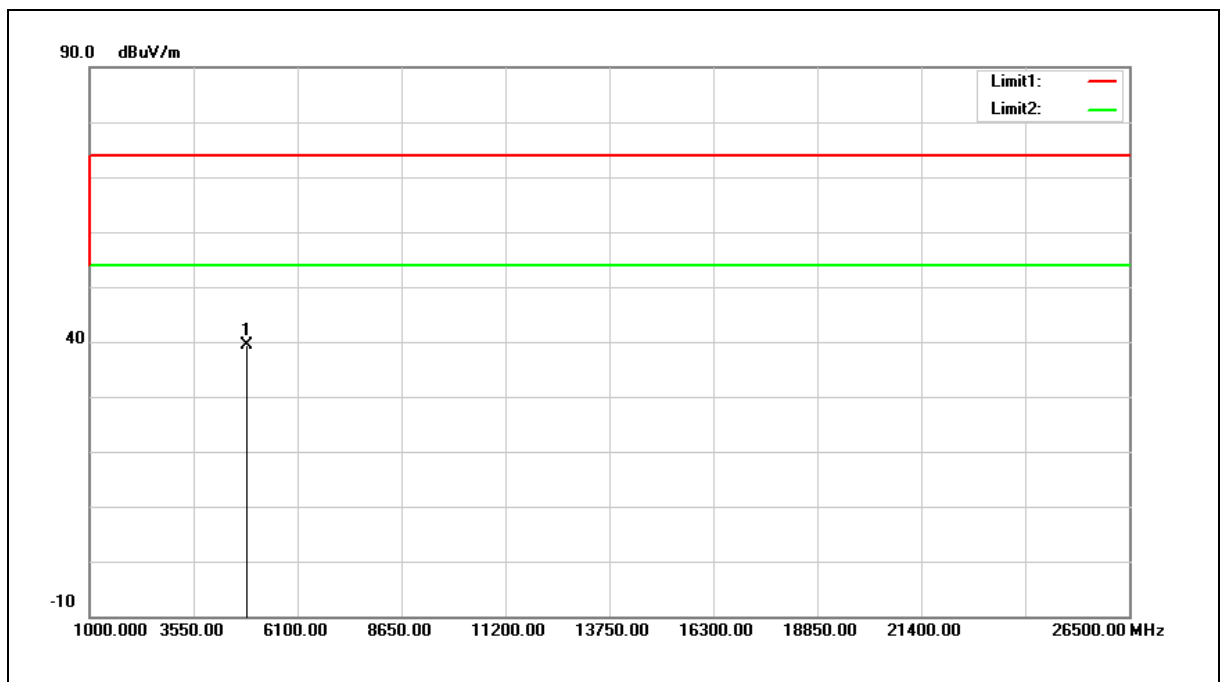


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	33.54	5.78	39.32	74.00	-34.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

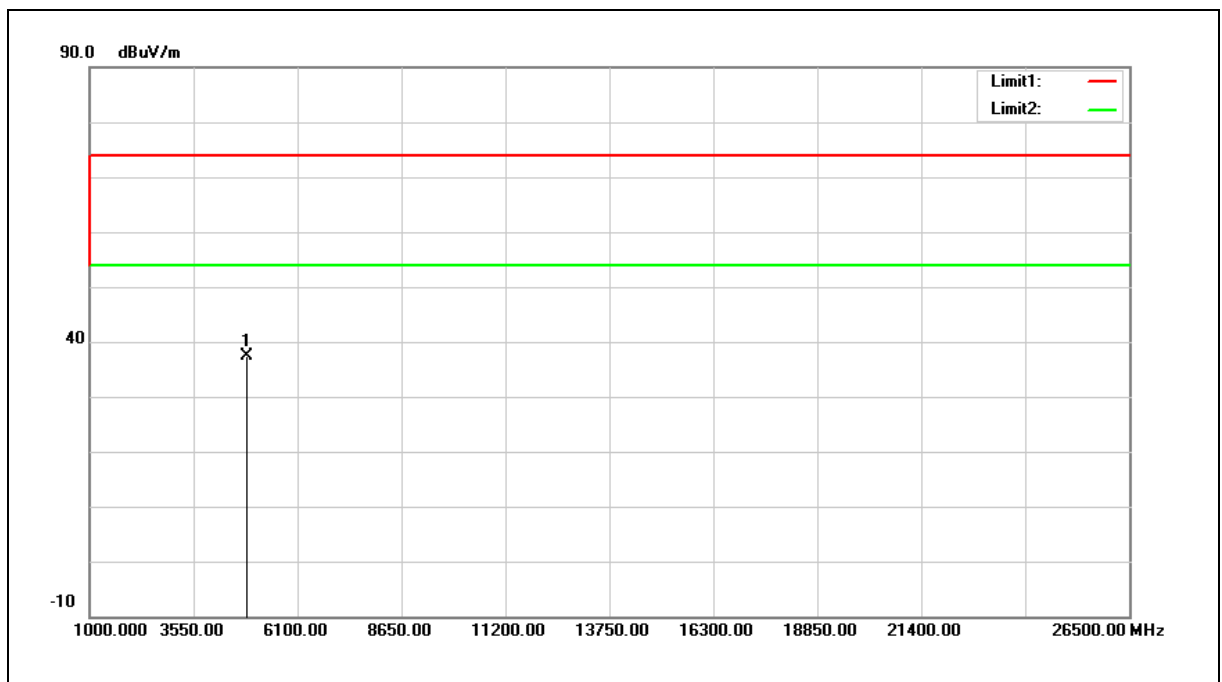


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	31.63	5.78	37.41	74.00	-36.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

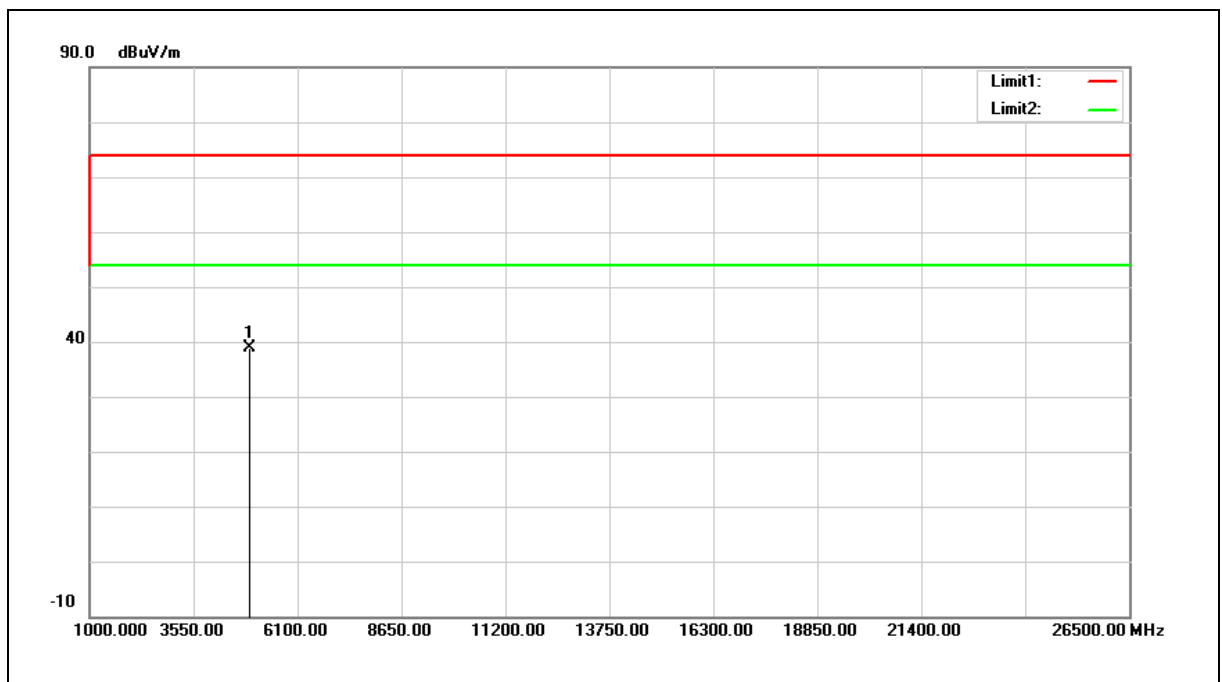


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.00	5.95	38.95	74.00	-35.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

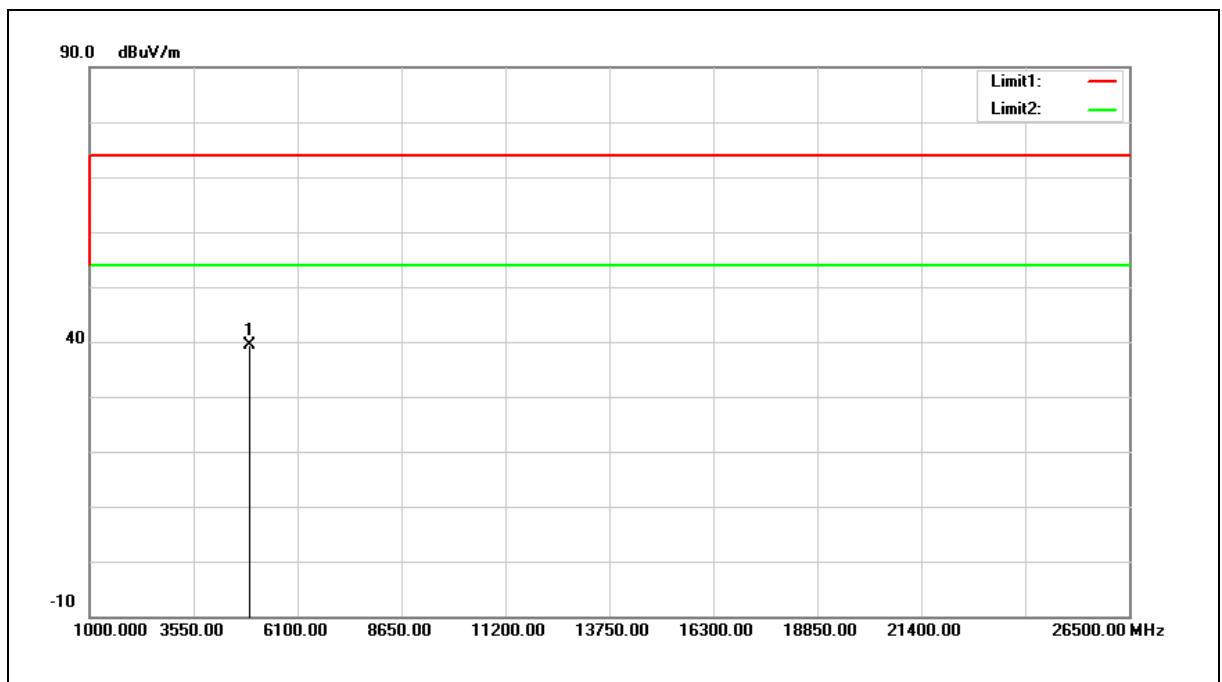


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.39	5.95	39.34	74.00	-34.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

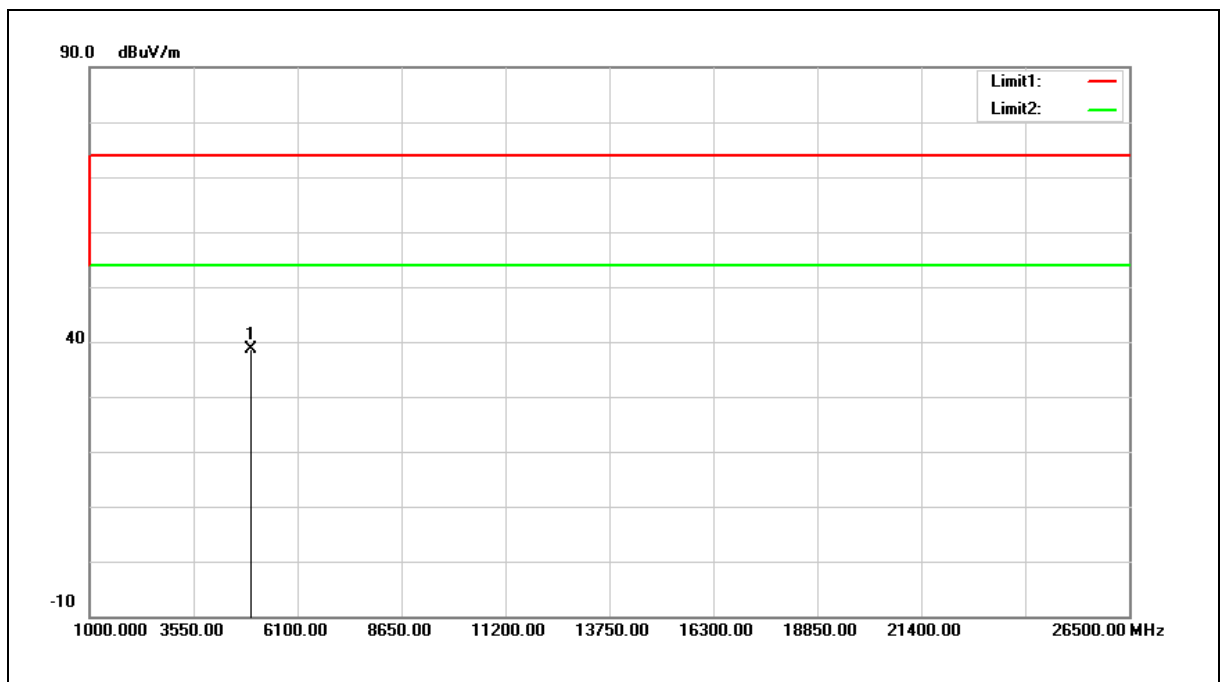


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	32.66	6.01	38.67	74.00	-35.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

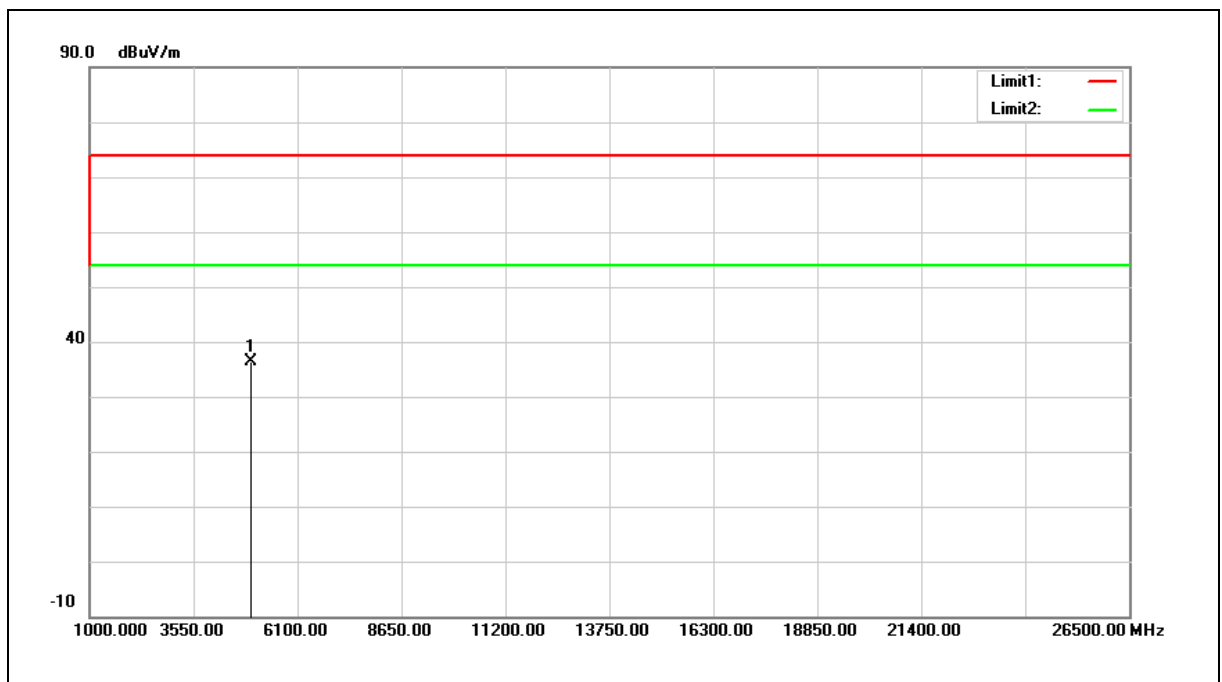


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.000	30.44	6.01	36.45	74.00	-37.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 9 (2.4GHz)	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Horizontal		

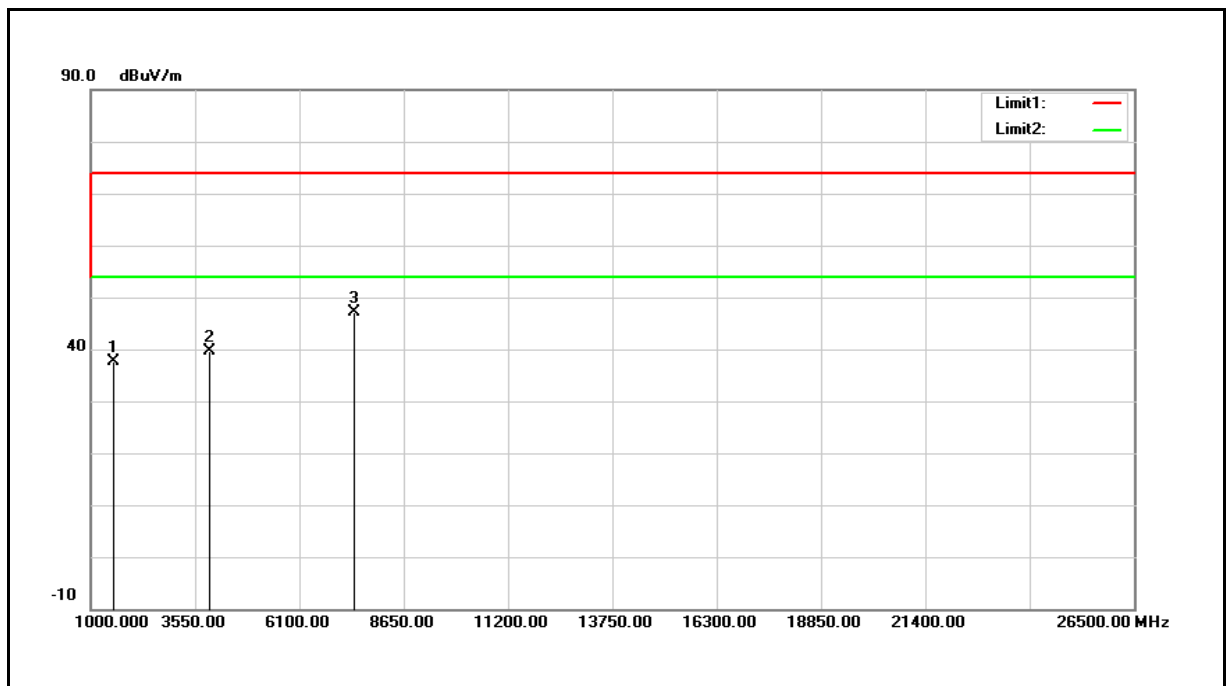


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1561.000	42.62	-4.95	37.67	74.00	-36.33	peak
2	3907.000	36.77	2.86	39.63	74.00	-34.37	peak
3	7409.000	34.55	12.65	47.20	74.00	-26.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 9 (2.4GHz)	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Vertical		

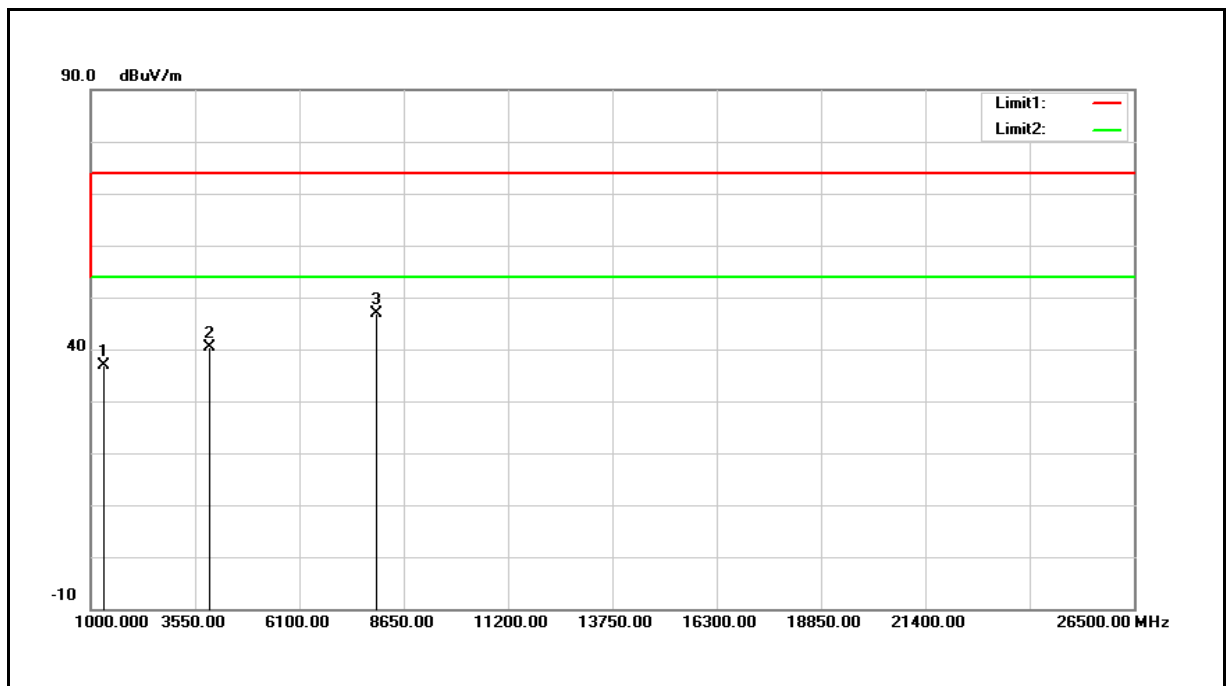

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1289.000	42.82	-5.98	36.84	74.00	-37.16	peak
2	3890.000	37.51	2.80	40.31	74.00	-33.69	peak
3	7987.000	33.26	13.68	46.94	74.00	-27.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註：其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射，其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

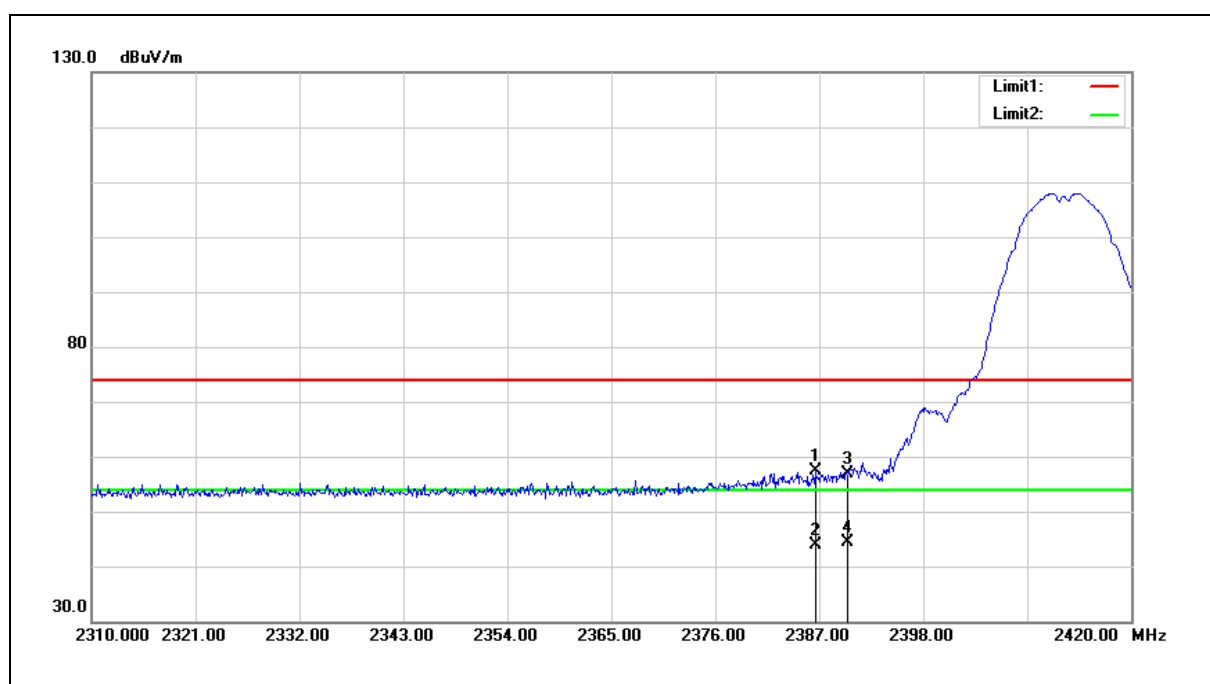


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.560	58.73	-1.45	57.28	74.00	-16.72	peak
2	2386.560	45.23	-1.45	43.78	54.00	-10.22	AVG
3	2390.000	58.25	-1.45	56.80	74.00	-17.20	peak
4	2390.000	45.90	-1.45	44.45	54.00	-9.55	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

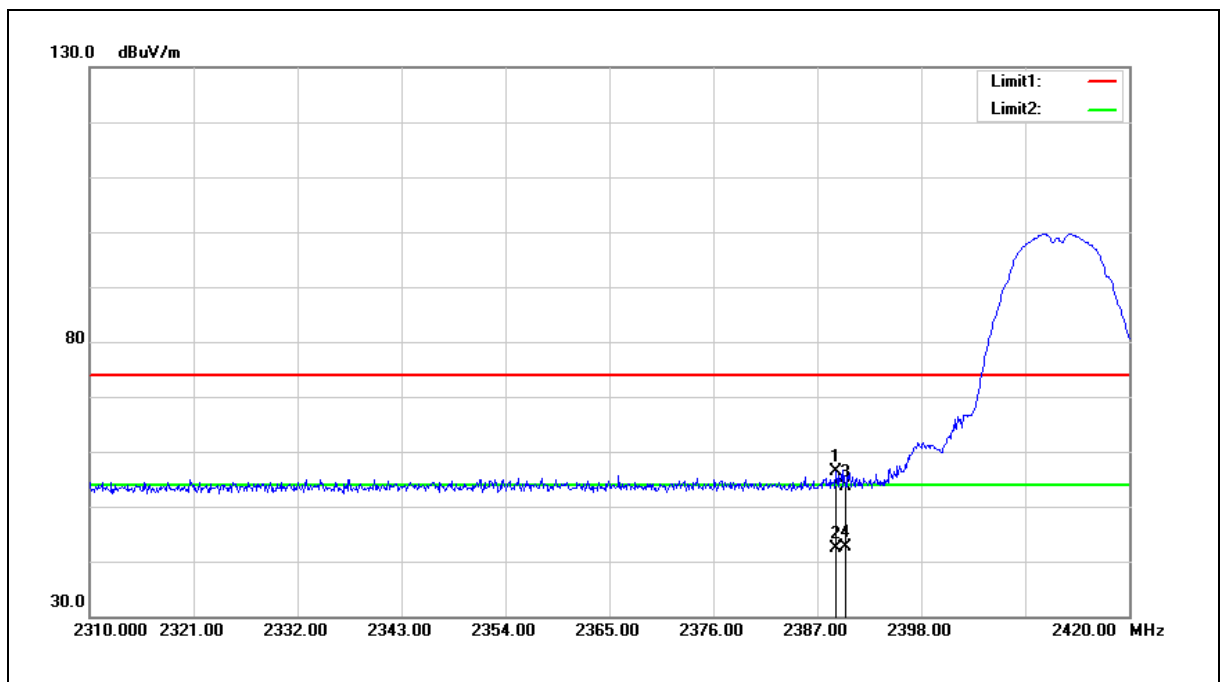


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.980	57.71	-1.45	56.26	74.00	-17.74	peak
2	2388.980	43.82	-1.45	42.37	54.00	-11.63	AVG
3	2390.000	55.11	-1.45	53.66	74.00	-20.34	peak
4	2390.000	44.19	-1.45	42.74	54.00	-11.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

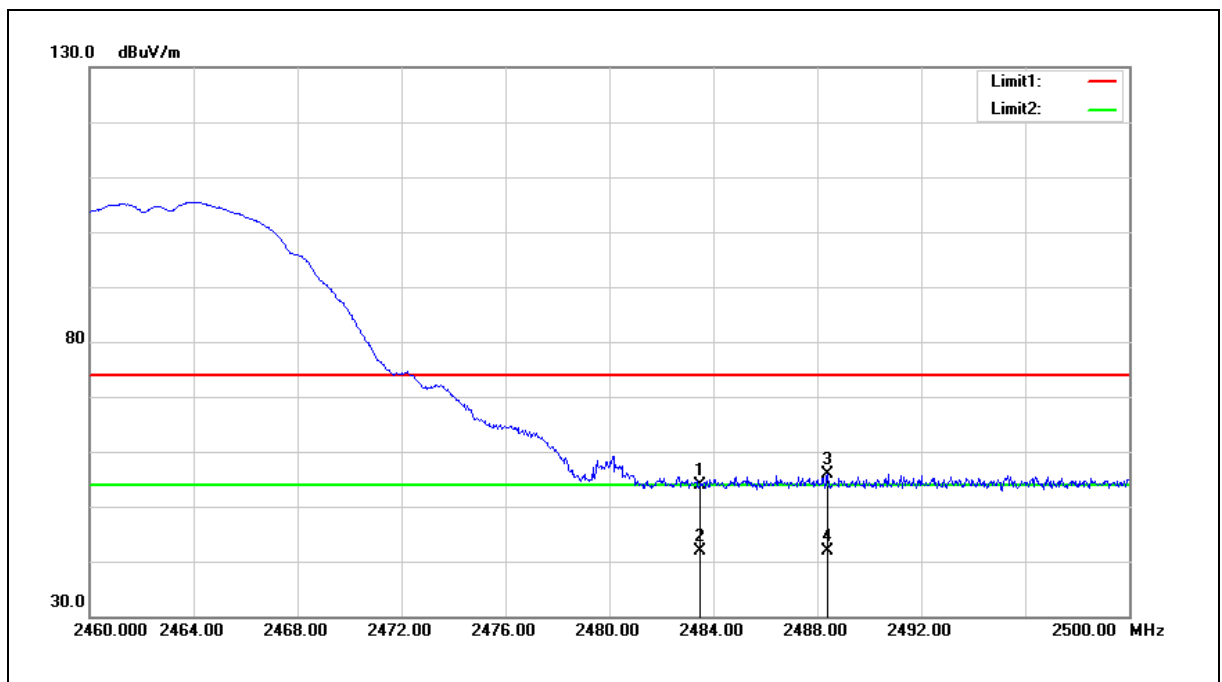


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.07	-1.08	53.99	74.00	-20.01	peak
2	2483.500	43.00	-1.08	41.92	54.00	-12.08	AVG
3	2488.400	56.96	-1.05	55.91	74.00	-18.09	peak
4	2488.400	43.00	-1.05	41.95	54.00	-12.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

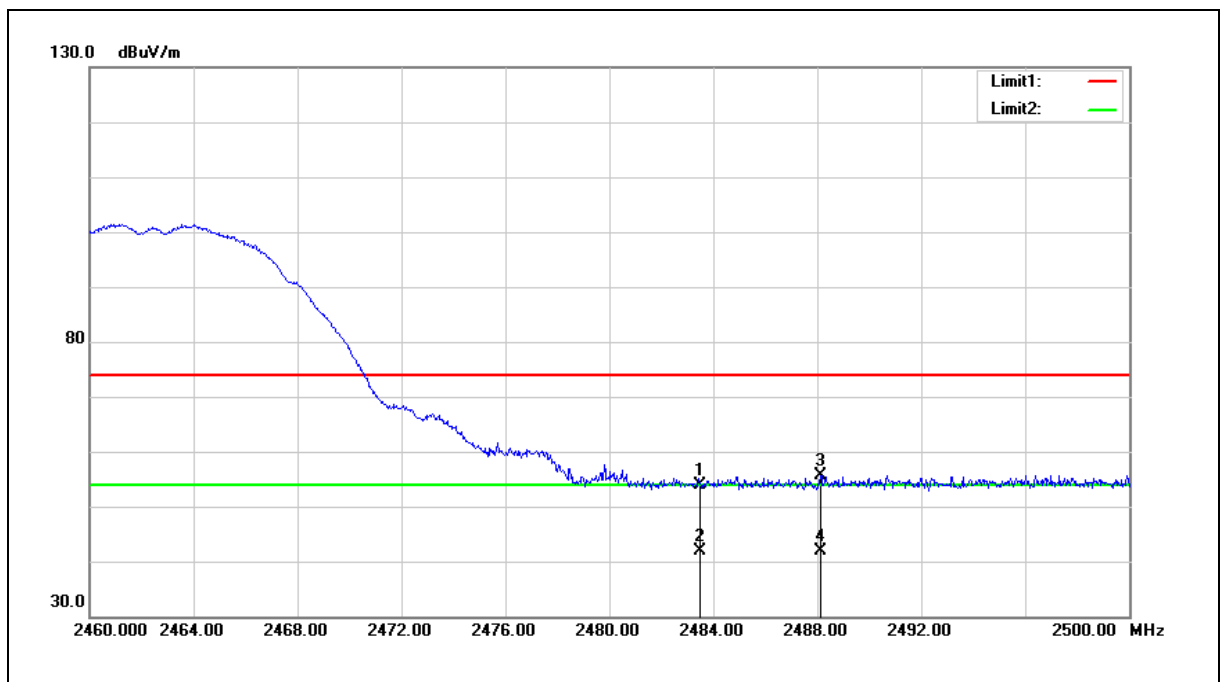


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.02	-1.08	53.94	74.00	-20.06	peak
2	2483.500	43.00	-1.08	41.92	54.00	-12.08	AVG
3	2488.120	56.80	-1.05	55.75	74.00	-18.25	peak
4	2488.120	42.99	-1.05	41.94	54.00	-12.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

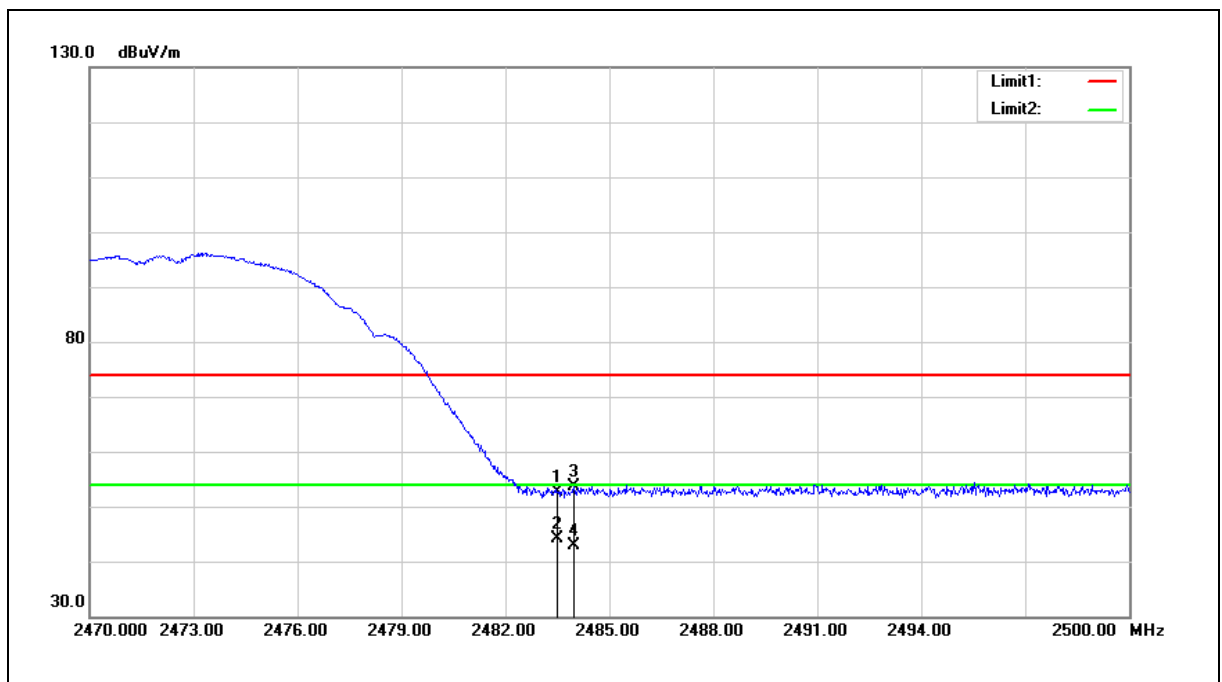


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.48	-2.93	52.55	74.00	-21.45	peak
2	2483.500	47.01	-2.93	44.08	54.00	-9.92	AVG
3	2483.980	56.48	-2.92	53.56	74.00	-20.44	peak
4	2483.980	45.86	-2.92	42.94	54.00	-11.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

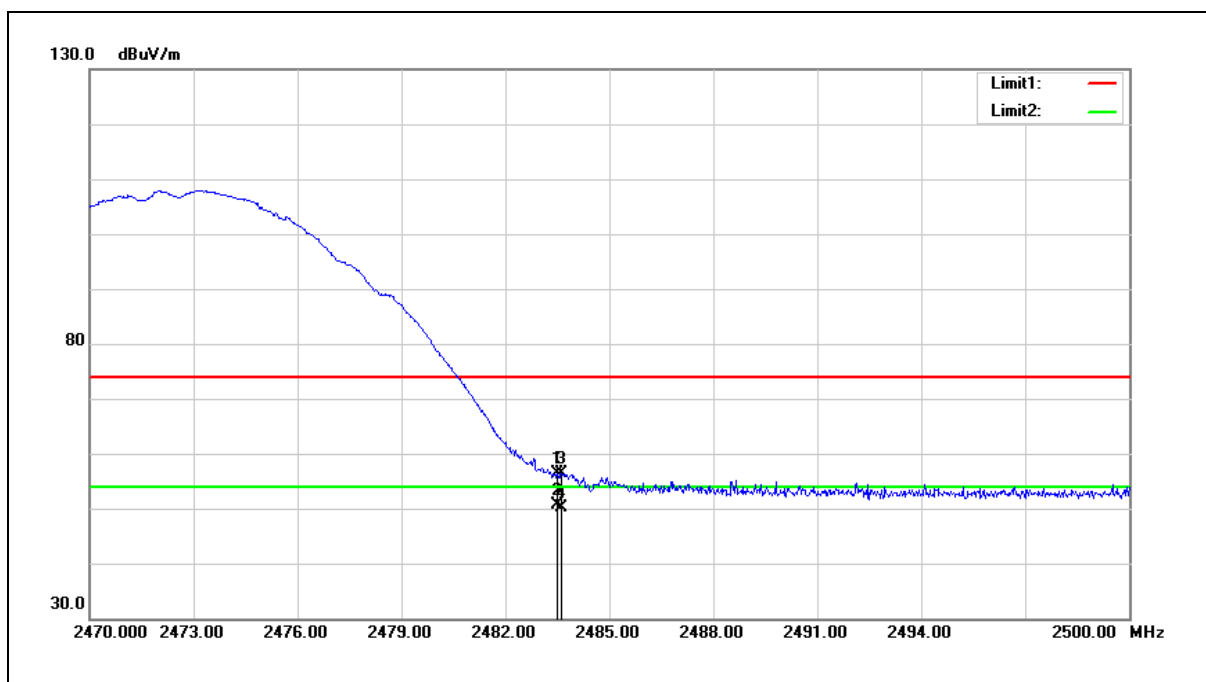


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.33	-2.93	56.40	74.00	-17.60	peak
2	2483.500	53.68	-2.93	50.75	54.00	-3.25	AVG
3	2483.620	59.19	-2.93	56.26	74.00	-17.74	peak
4	2483.620	53.02	-2.93	50.09	54.00	-3.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

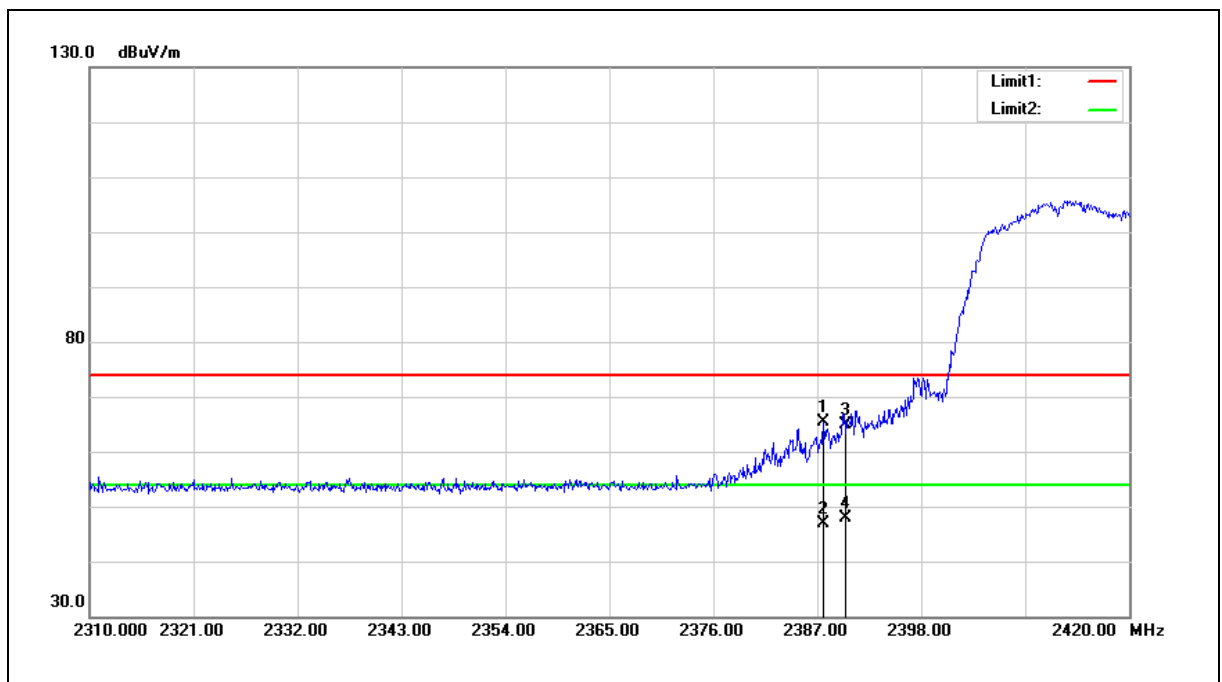


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.660	66.86	-1.44	65.42	74.00	-8.58	peak
2	2387.660	48.21	-1.44	46.77	54.00	-7.23	AVG
3	2390.000	66.27	-1.45	64.82	74.00	-9.18	peak
4	2390.000	49.23	-1.45	47.78	54.00	-6.22	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

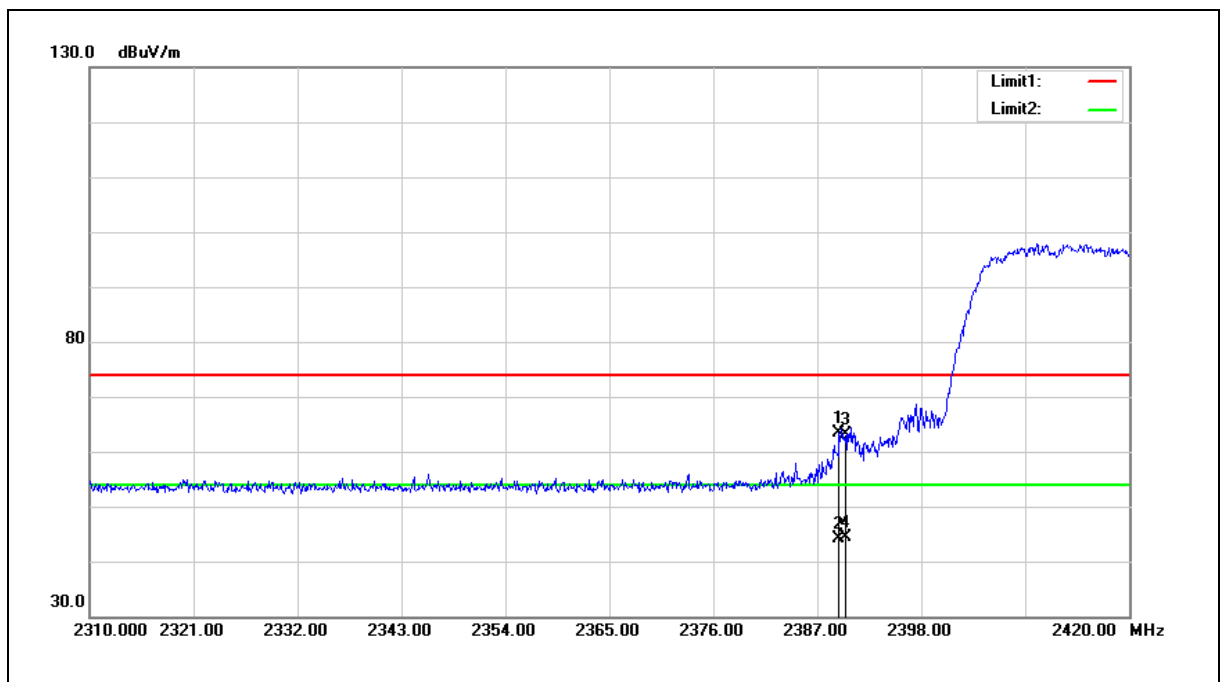


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	64.84	-1.45	63.39	74.00	-10.61	peak
2	2389.310	45.66	-1.45	44.21	54.00	-9.79	AVG
3	2390.000	64.66	-1.45	63.21	74.00	-10.79	peak
4	2390.000	45.86	-1.45	44.41	54.00	-9.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

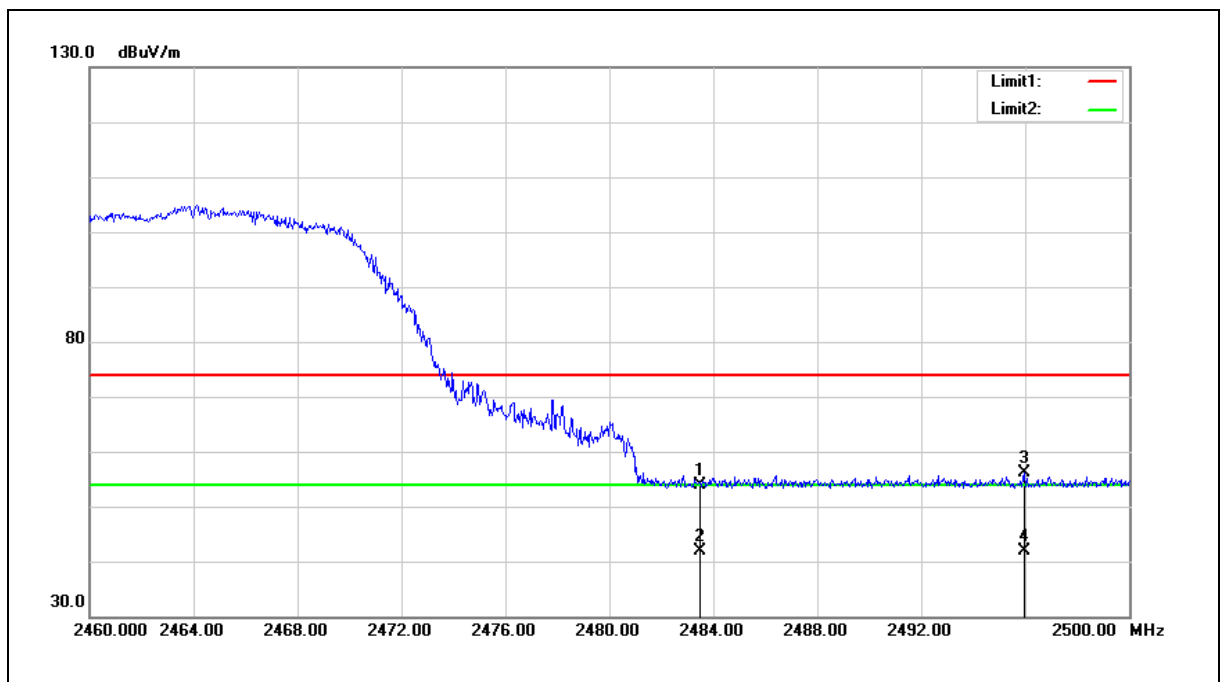


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.08	-1.08	54.00	74.00	-20.00	peak
2	2483.500	43.02	-1.08	41.94	54.00	-12.06	AVG
3	2495.960	57.13	-1.02	56.11	74.00	-17.89	peak
4	2495.960	43.01	-1.02	41.99	54.00	-12.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

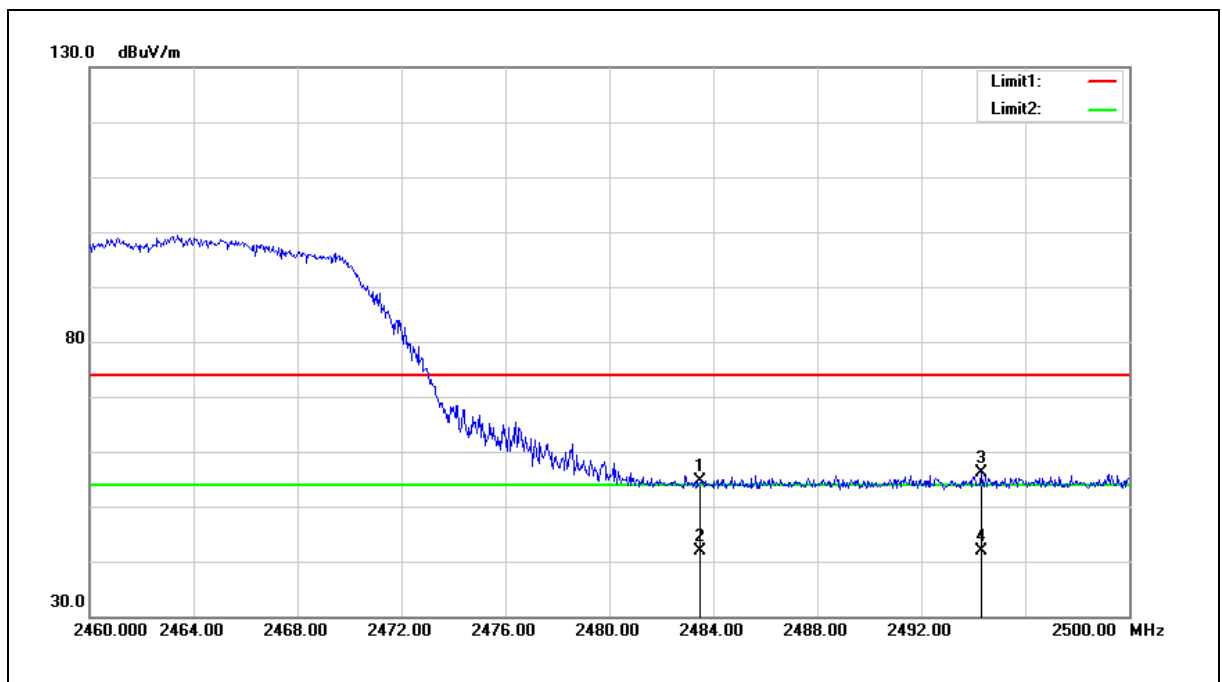


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.65	-1.08	54.57	74.00	-19.43	peak
2	2483.500	42.98	-1.08	41.90	54.00	-12.10	AVG
3	2494.320	57.17	-1.04	56.13	74.00	-17.87	peak
4	2494.320	43.00	-1.04	41.96	54.00	-12.04	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

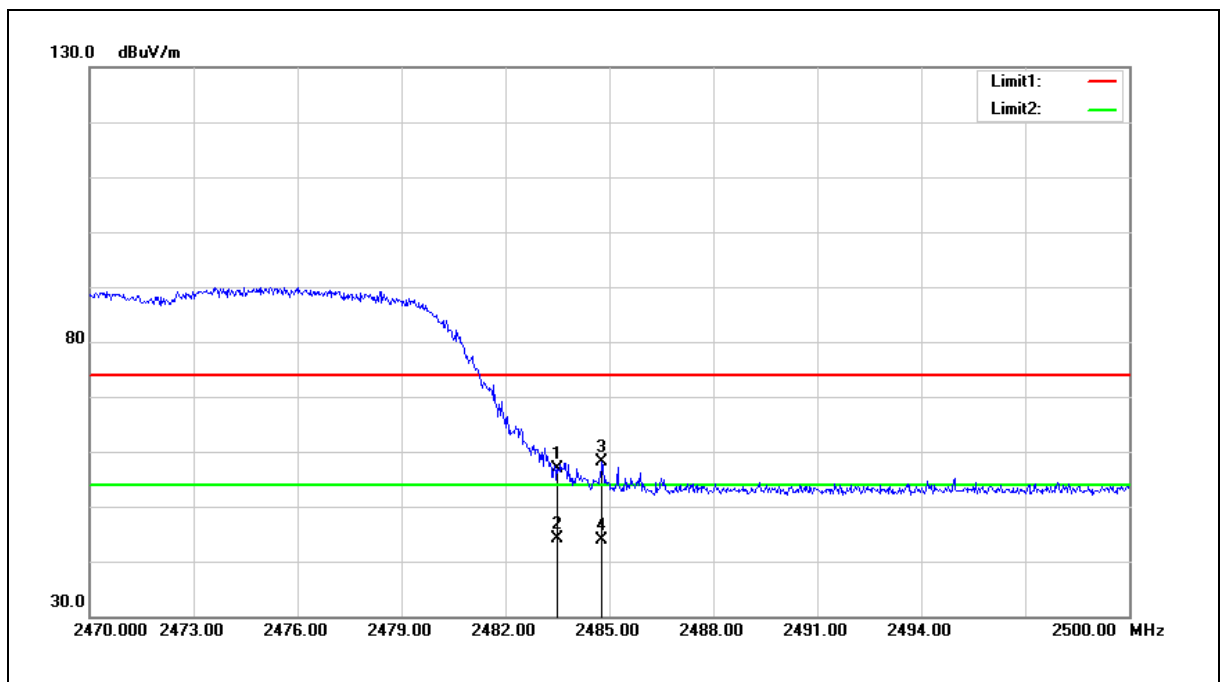


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.71	-2.93	56.78	74.00	-17.22	peak
2	2483.500	47.15	-2.93	44.22	54.00	-9.78	AVG
3	2484.790	60.97	-2.92	58.05	74.00	-15.95	peak
4	2484.790	46.78	-2.92	43.86	54.00	-10.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

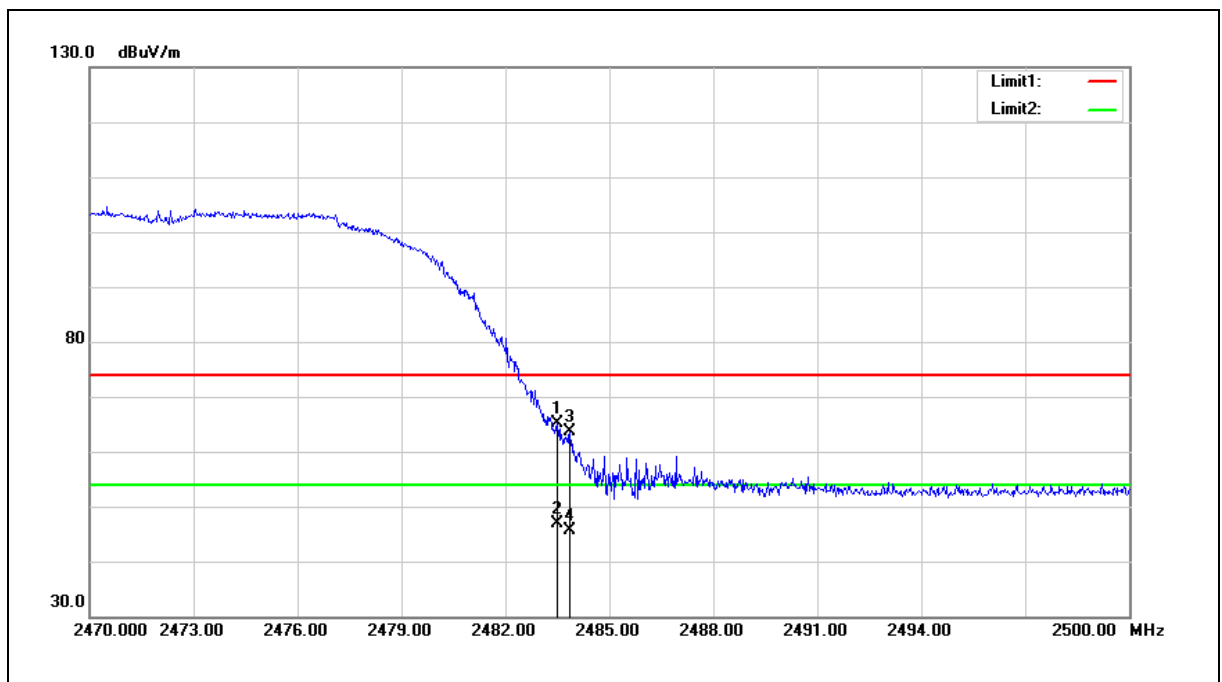


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	68.09	-2.93	65.16	74.00	-8.84	peak
2	2483.500	49.78	-2.93	46.85	54.00	-7.15	AVG
3	2483.860	66.45	-2.93	63.52	74.00	-10.48	peak
4	2483.860	48.59	-2.93	45.66	54.00	-8.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

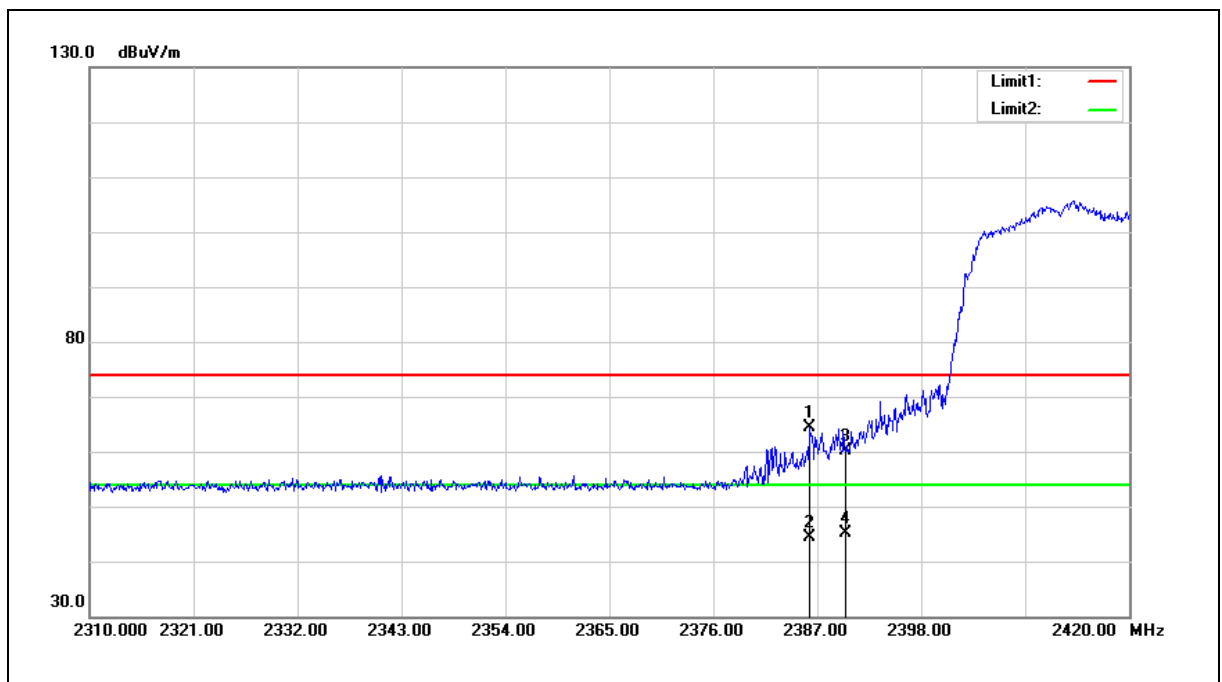


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.230	65.90	-1.45	64.45	74.00	-9.55	peak
2	2386.230	45.93	-1.45	44.48	54.00	-9.52	AVG
3	2390.000	61.58	-1.45	60.13	74.00	-13.87	peak
4	2390.000	46.67	-1.45	45.22	54.00	-8.78	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

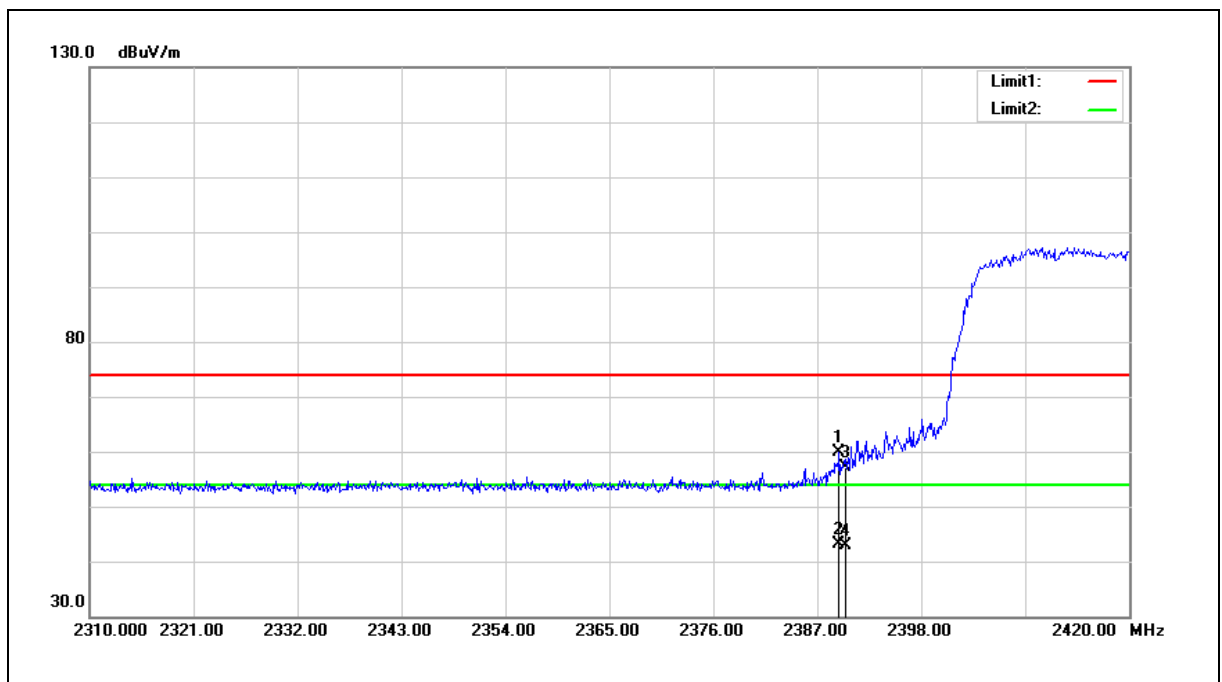


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	61.29	-1.45	59.84	74.00	-14.16	peak
2	2389.310	44.54	-1.45	43.09	54.00	-10.91	AVG
3	2390.000	58.57	-1.45	57.12	74.00	-16.88	peak
4	2390.000	44.40	-1.45	42.95	54.00	-11.05	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

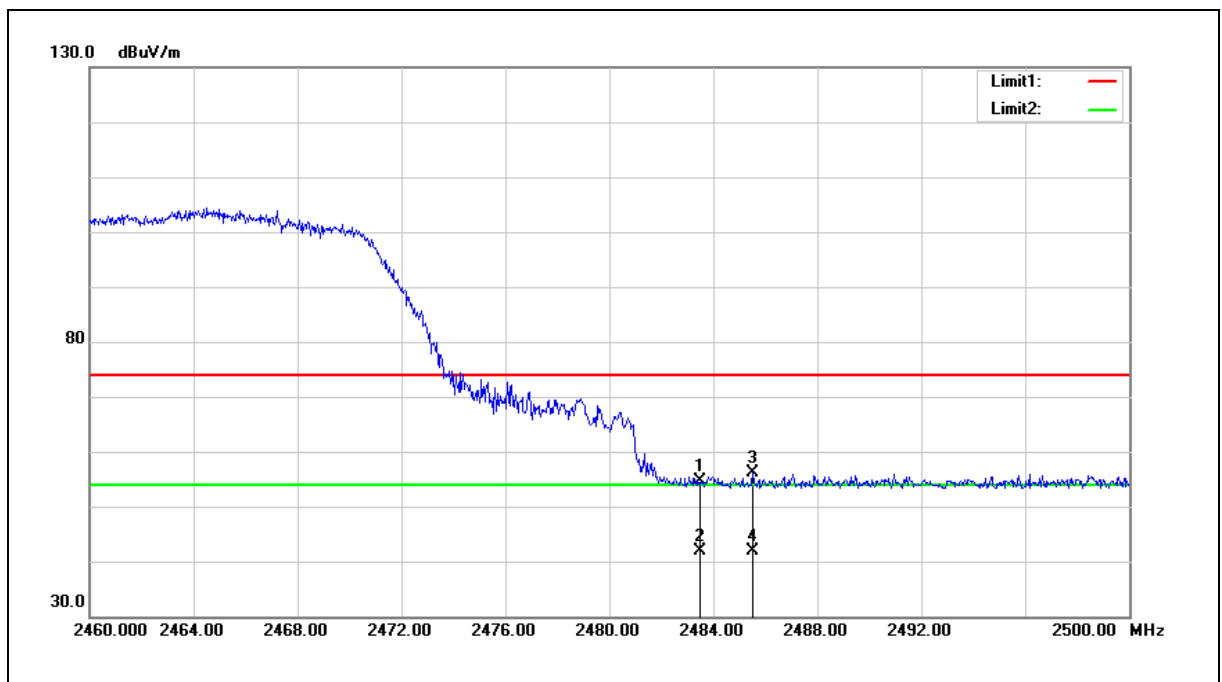


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.76	-1.08	54.68	74.00	-19.32	peak
2	2483.500	43.05	-1.08	41.97	54.00	-12.03	AVG
3	2485.520	57.22	-1.07	56.15	74.00	-17.85	peak
4	2485.520	42.99	-1.07	41.92	54.00	-12.08	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

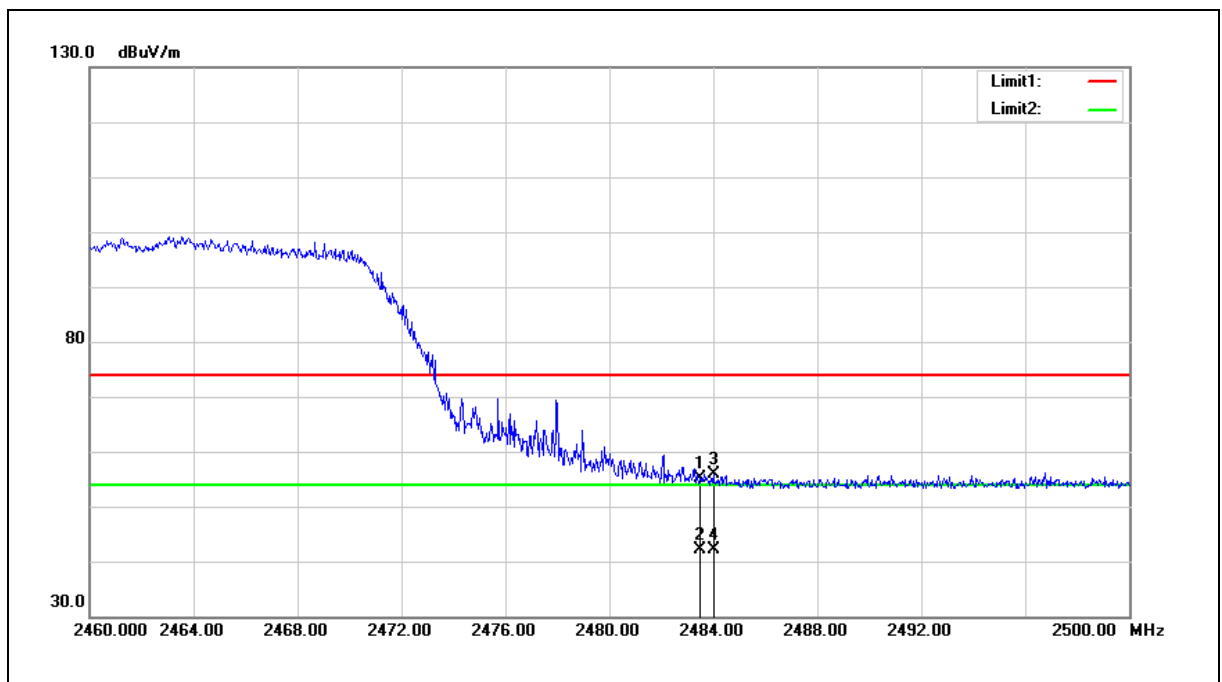


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.16	-1.08	55.08	74.00	-18.92	peak
2	2483.500	43.22	-1.08	42.14	54.00	-11.86	AVG
3	2484.000	56.95	-1.07	55.88	74.00	-18.12	peak
4	2484.000	43.08	-1.07	42.01	54.00	-11.99	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

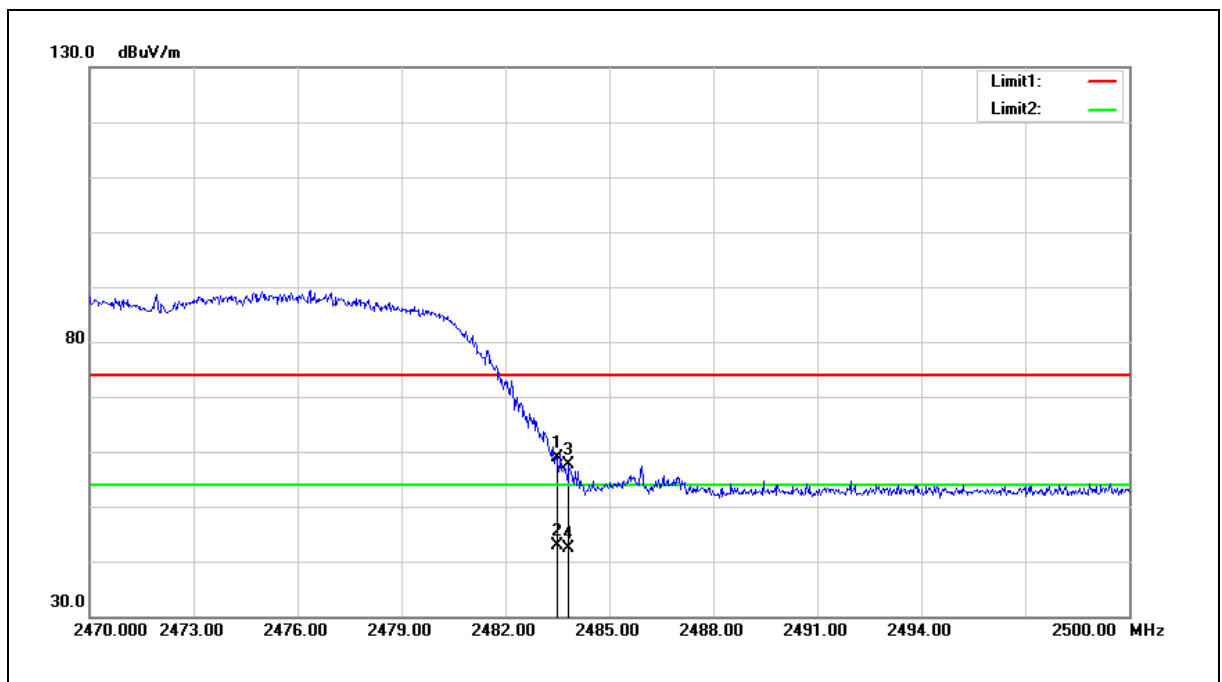


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.69	-2.93	58.76	74.00	-15.24	peak
2	2483.500	45.87	-2.93	42.94	54.00	-11.06	AVG
3	2483.830	60.60	-2.93	57.67	74.00	-16.33	peak
4	2483.830	45.33	-2.93	42.40	54.00	-11.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge	Power:	DC 4V
Frequency:	2472MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

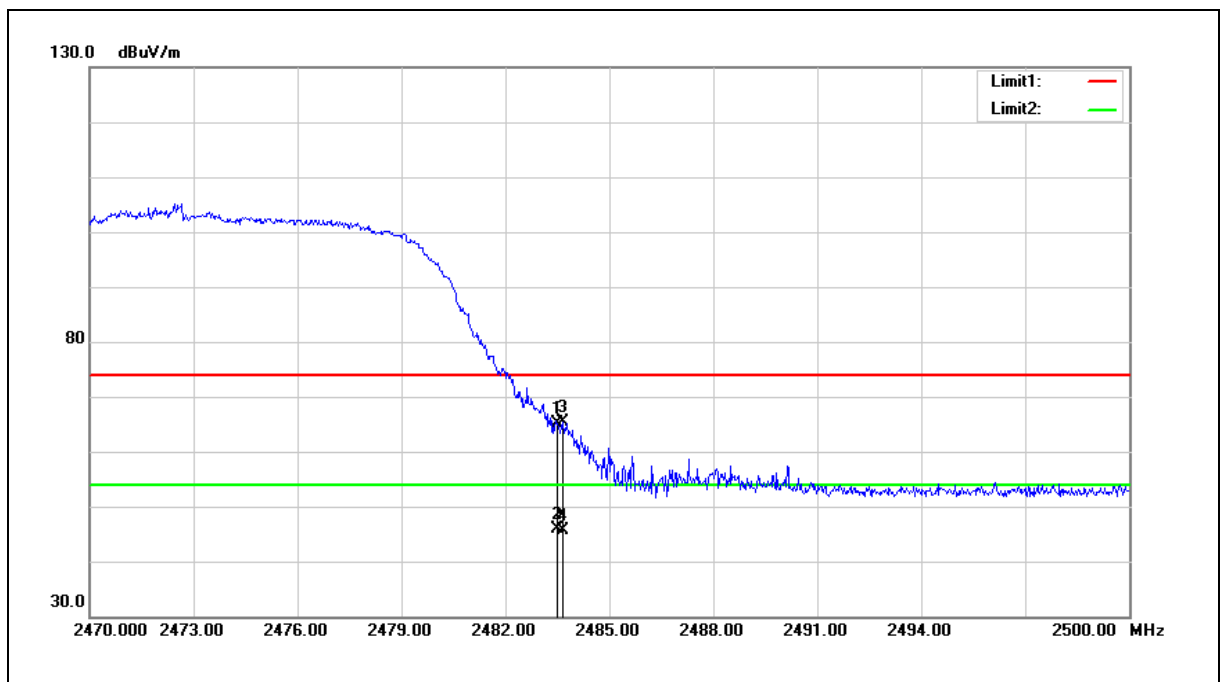

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	68.13	-2.93	65.20	74.00	-8.80	peak
2	2483.500	48.89	-2.93	45.96	54.00	-8.04	AVG
3	2483.650	68.28	-2.93	65.35	74.00	-8.65	peak
4	2483.650	48.50	-2.93	45.57	54.00	-8.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.2.2 峰值傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.2(1)(C)節之要求，操作於 2400-2483.5 兆赫(MHz)數位調變技術系統：1 瓦(W)(含)以下

測試架構圖：

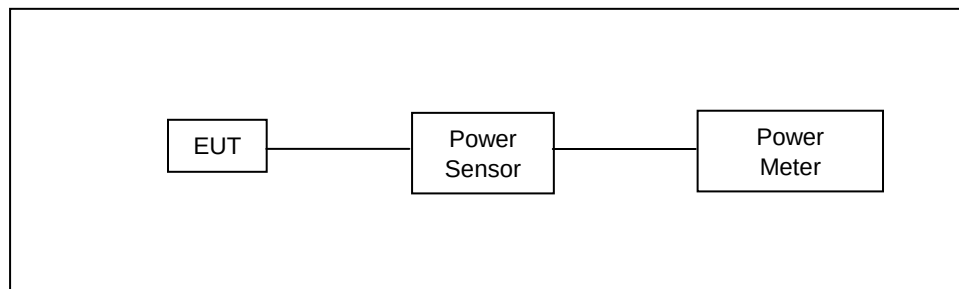

測試結果:

操作模式：Mode 2 / Mode 3 / Mode 4				
操作模式	Data Rate (Mbps)	頻道 CH	輸出功率(Peak)	
			dBm	W
Mode 2	1	01	20.11	0.103
		06	20.29	0.107
		11	19.98	0.100
		13	20.31	0.107
Mode 3	6	01	23.87	0.244
		06	24.98	0.315
		11	23.71	0.235
		13	25.05	0.320
Mode 4	6.5	01	23.46	0.222
		06	24.19	0.262
		11	23.31	0.214
		13	23.97	0.249

4.2.3 天線規格之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.3(3)節之要求,除 3.10.1.3(1)及 3.10.1.3(2)外,使用超過 6 dBi 方向增益之發射天線時,應依超過 6 dBi 天線方向增益的 dBi 總量,等量減少最大傳導輸出功率限制值。

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.4 節之要求,天線之規格不受第 2.2 節規定之限制

判定結果:


符合,本產品使用 **PCB Antenna**,**最大增益值 -2.9 dBi**。

4.2.4 非必要頻帶之量測

合格標準：

發射限制： 使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，須衰減 20 分貝(dB)，以射頻傳導或輻射方式測量。

測試架構圖：

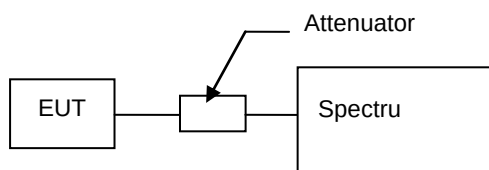

測試結果：


操作模式	: Mode 2 / Mode 3 / Mode 4
測試結果	: 合格
量測之結果掃圖如下頁所示	

附註 1: 於使用頻帶範圍之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減 20 分貝(dB)以上，符合規定。


附註 2: 測試結果頻帶外之輻射雜訊皆小於主頻 TX 20dB。

Mode 2: IEEE 802.11b Continuous TX Mode


CH01

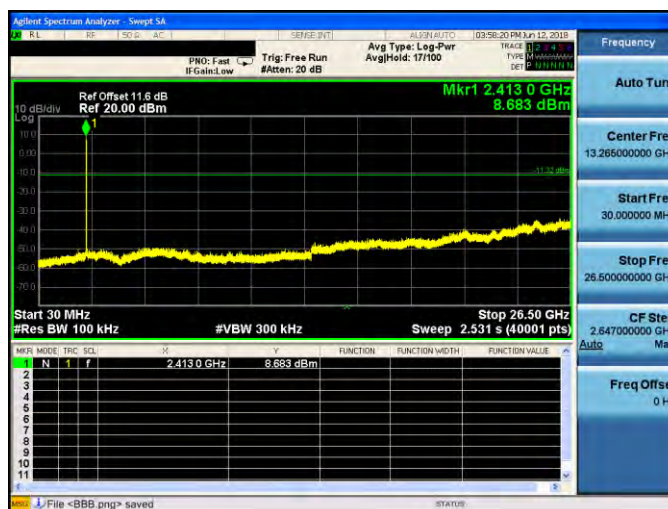



CH06

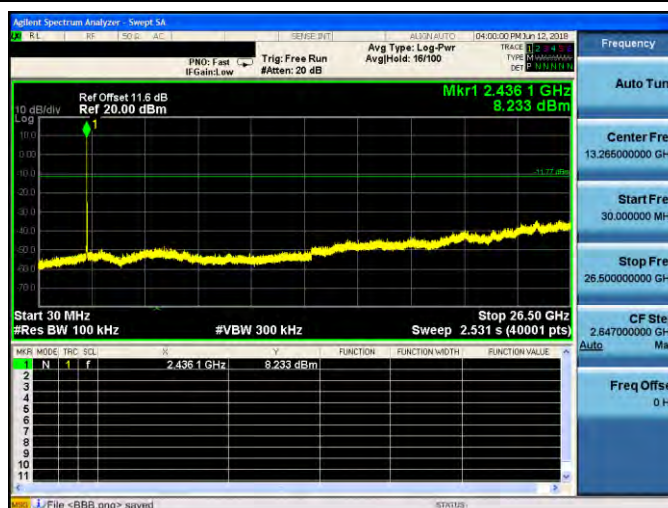



CH11

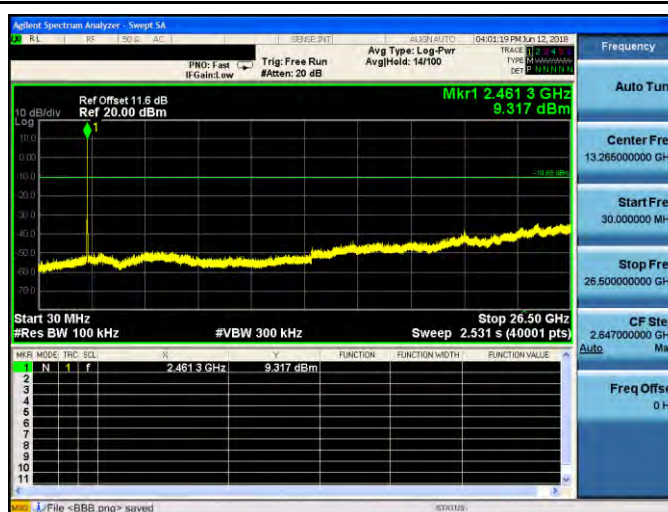

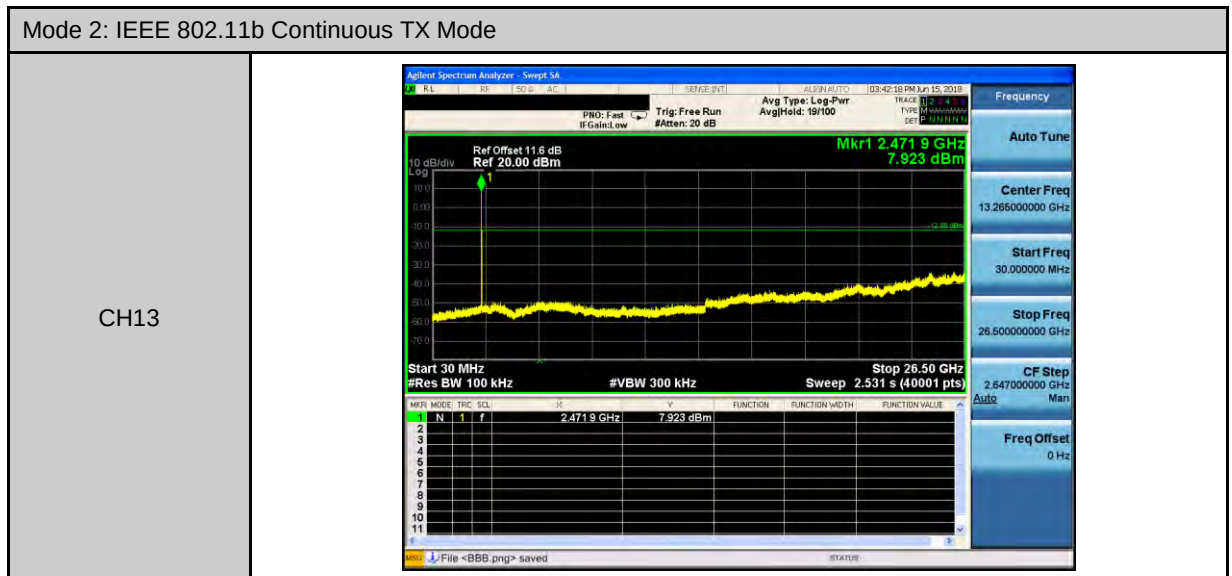

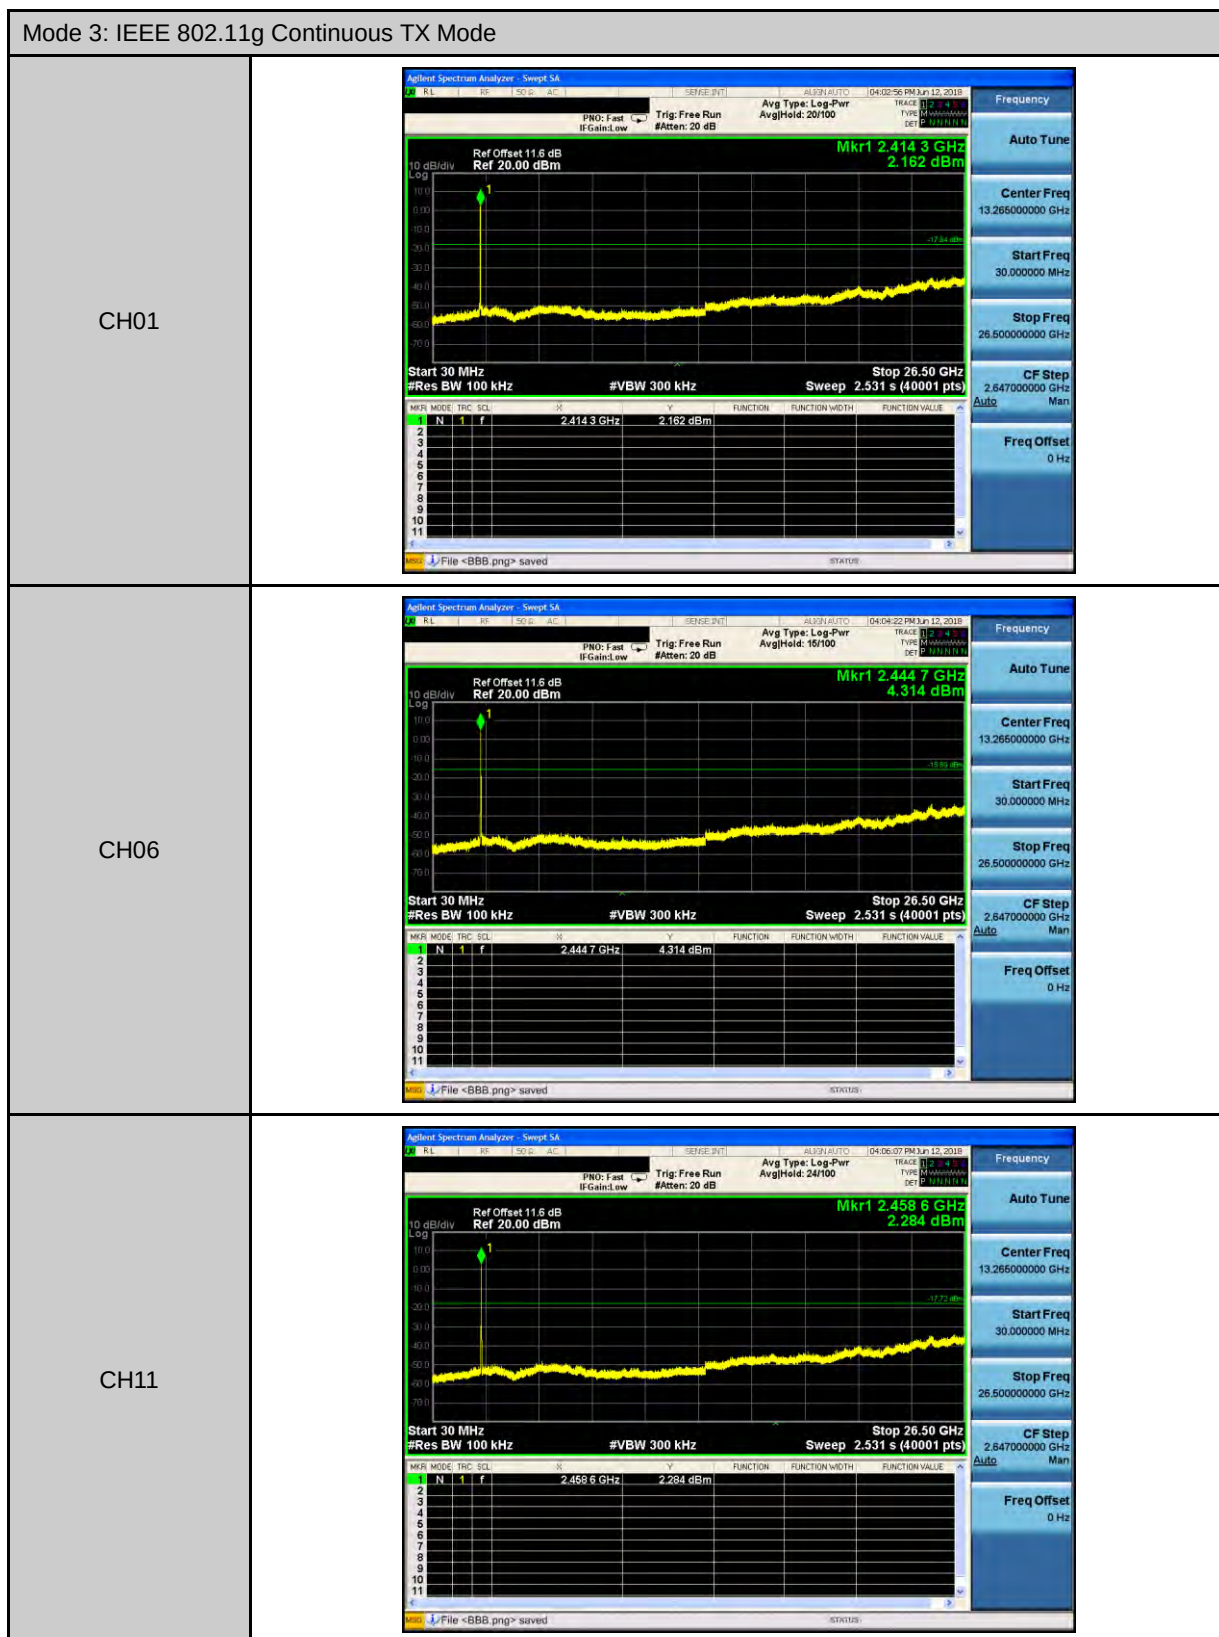

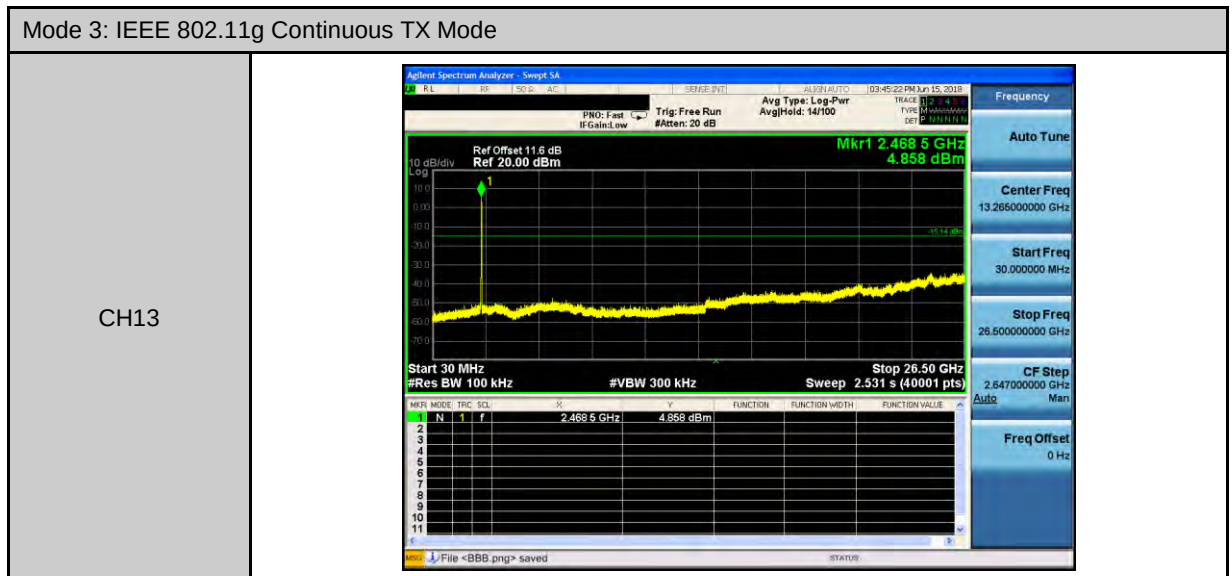

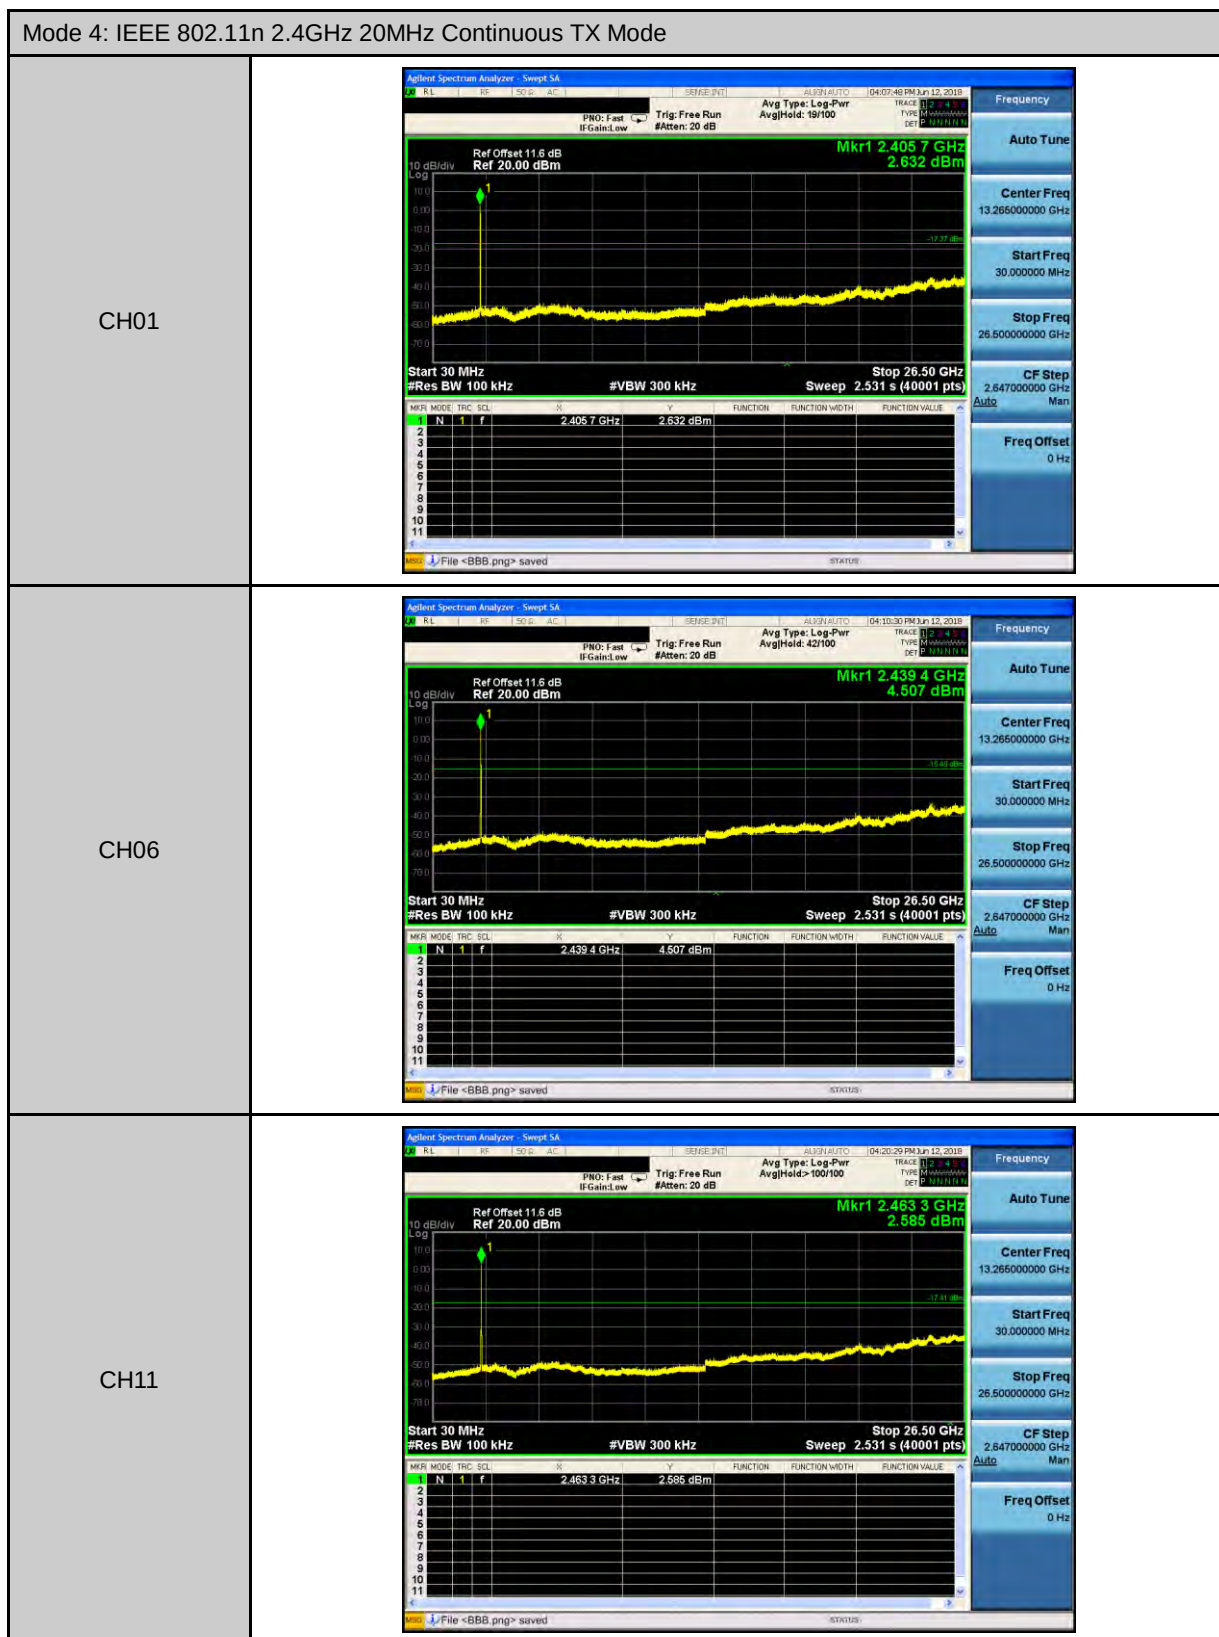


4.2.5 6dB頻寬之要求

合格標準：

依據 NCC 低功率射頻電機技術規範 3.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言，6dB 頻寬至少應有 500 千赫(kHz)。


測試架構圖：

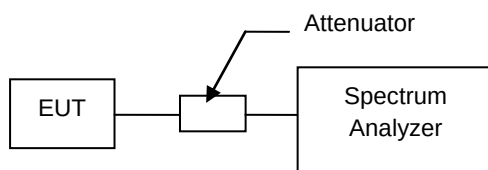

測試結果：

操作模式： Mode 2 / Mode 3 / Mode 4			
操作模式	頻道	量測值 (kHz)	限制值 (kHz)
Mode 2	CH01	9054	> 500
	CH06	9132	> 500
	CH11	9096	> 500
	CH13	9058	> 500
Mode 3	CH01	16110	> 500
	CH06	16100	> 500
	CH11	16100	> 500
	CH13	16110	> 500
Mode 4	CH01	16370	> 500
	CH06	16670	> 500
	CH11	16380	> 500
	CH13	17220	> 500
測試掃描圖請參考下頁。			

Mode 2: IEEE 802.11b Continuous TX Mode	
CH01	Agilent Spectrum Analyzer - Occupied BW RL SP 150 dB AC REF (E-PP) ALTERN AUTO 03:12:22 PM Jun 12, 2018 #F Gain Low Center Freq: 2.412000000 GHz Radio Std: None Trig: Free Run Avg/Hold: >10/10 Radio Device: BTS #Attenu: 20 dB Ref Offset 11.6 dB Ref 20.00 dBm 10 dB/div Log 10.0 9.0 8.0 7.0 6.0 5.0 4.0 3.0 2.0 1.0 0.0 -1.0 -2.0 -3.0 -4.0 -5.0 -6.0 -7.0 -8.0 -9.0 -10.0 Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.154 MHz Total Power 25.4 dBm Transmit Freq Error -14.129 kHz OBW Power 99.00 % x dB Bandwidth 9.054 MHz x dB -6.00 dB File <BBB.png> saved STATUS Frequency Center Freq 2.412000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0 Hz
CH06	Agilent Spectrum Analyzer - Occupied BW RL SP 150 dB AC REF (E-PP) ALTERN AUTO 03:13:31 PM Jun 12, 2018 #F Gain Low Center Freq: 2.437000000 GHz Radio Std: None Trig: Free Run Avg/Hold: >10/10 Radio Device: BTS #Attenu: 20 dB Ref Offset 11.6 dB Ref 20.00 dBm 10 dB/div Log 10.0 9.0 8.0 7.0 6.0 5.0 4.0 3.0 2.0 1.0 0.0 -1.0 -2.0 -3.0 -4.0 -5.0 -6.0 -7.0 -8.0 -9.0 -10.0 Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.350 MHz Total Power 25.5 dBm Transmit Freq Error 211.69 kHz OBW Power 99.00 % x dB Bandwidth 9.132 MHz x dB -6.00 dB File <BBB.png> saved STATUS Frequency Center Freq 2.437000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0 Hz
CH11	Agilent Spectrum Analyzer - Occupied BW RL SP 150 dB AC REF (E-PP) ALTERN AUTO 03:14:07 PM Jun 12, 2018 #F Gain Low Center Freq: 2.462000000 GHz Radio Std: None Trig: Free Run Avg/Hold: >10/10 Radio Device: BTS #Attenu: 20 dB Ref Offset 11.6 dB Ref 20.00 dBm 10 dB/div Log 10.0 9.0 8.0 7.0 6.0 5.0 4.0 3.0 2.0 1.0 0.0 -1.0 -2.0 -3.0 -4.0 -5.0 -6.0 -7.0 -8.0 -9.0 -10.0 Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.421 MHz Total Power 25.2 dBm Transmit Freq Error 28.884 kHz OBW Power 99.00 % x dB Bandwidth 9.096 MHz x dB -6.00 dB File <BBB.png> saved STATUS Frequency Center Freq 2.462000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0 Hz

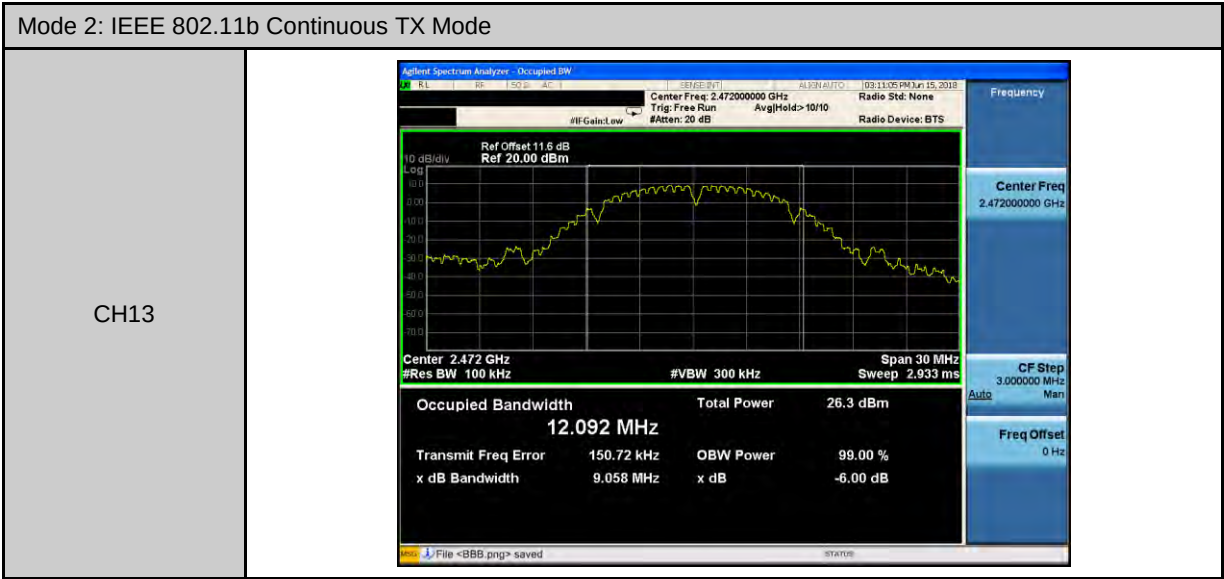


Mode 3: IEEE 802.11g Continuous TX Mode

CH01




CH06

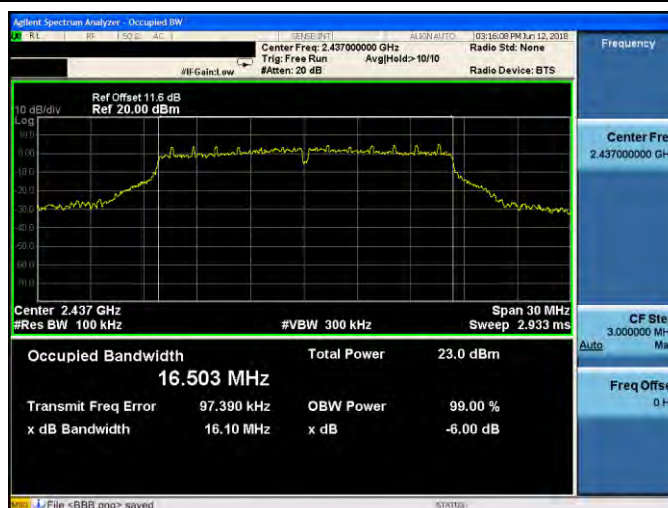

CH11



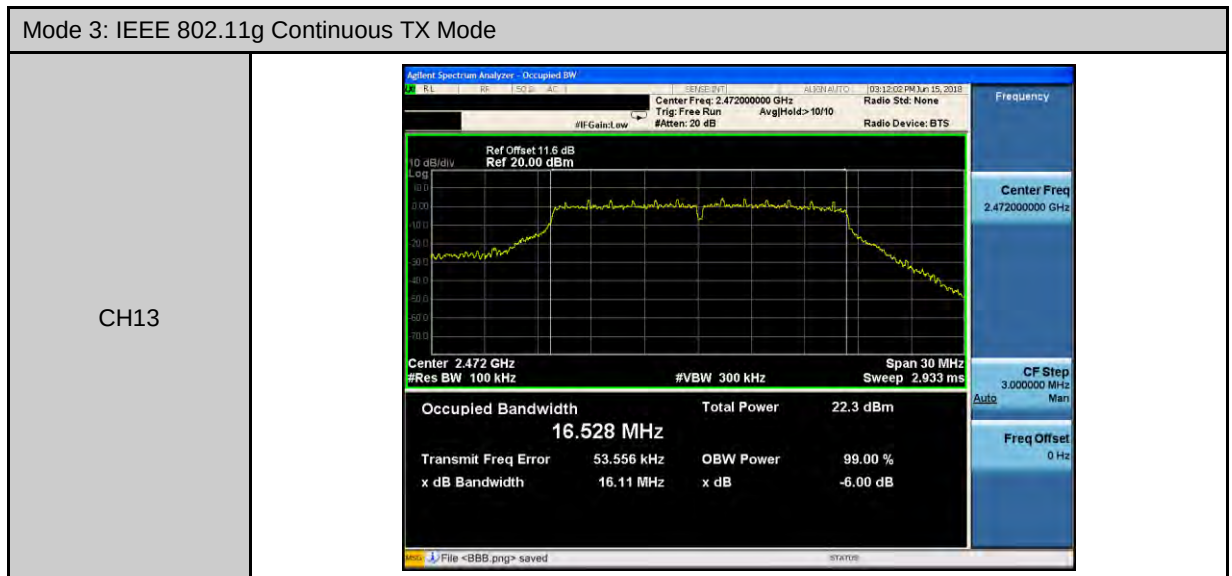


Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode

CH01



CH06

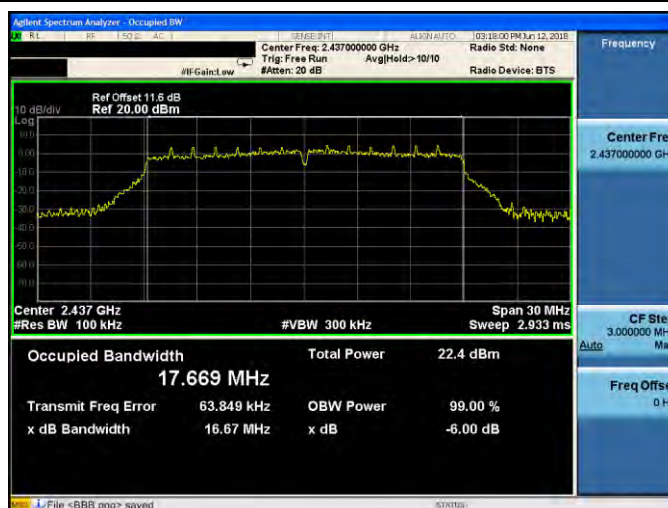

CH11




4.2.6 峰值發射功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.6(2)(B)節之要求，數位調變技術(Digital Modulation Techniques)系統之功率密度,再使用頻率範圍之任意 3kHz 頻寬內,由發射機傳導至天線之峰值發射功率頻譜密度在任意期間內,皆不得大於 8dBm(複合系統時，關閉跳頻作業狀態檢驗)。


測試架構圖：


測試場地測試配置如圖所示。

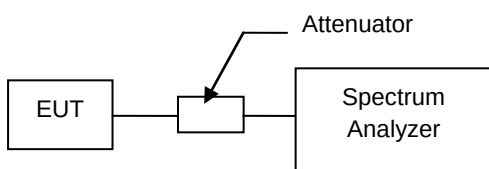



測試結果:


操作模式： Mode 2 / Mode 3 / Mode 4			
測試結果： 合格			
操作模式	頻道	量測值 (dBm)	限制值 (dBm)
Mode 2	CH01	-4.440	< 8
	CH06	-4.633	< 8
	CH11	-3.551	< 8
	CH13	-5.804	< 8
Mode 3	CH01	-9.596	< 8
	CH06	-8.066	< 8
	CH11	-10.085	< 8
	CH13	-8.801	< 8
Mode 4	CH01	-9.818	< 8
	CH06	-8.272	< 8
	CH11	-10.220	< 8
	CH13	-9.783	< 8

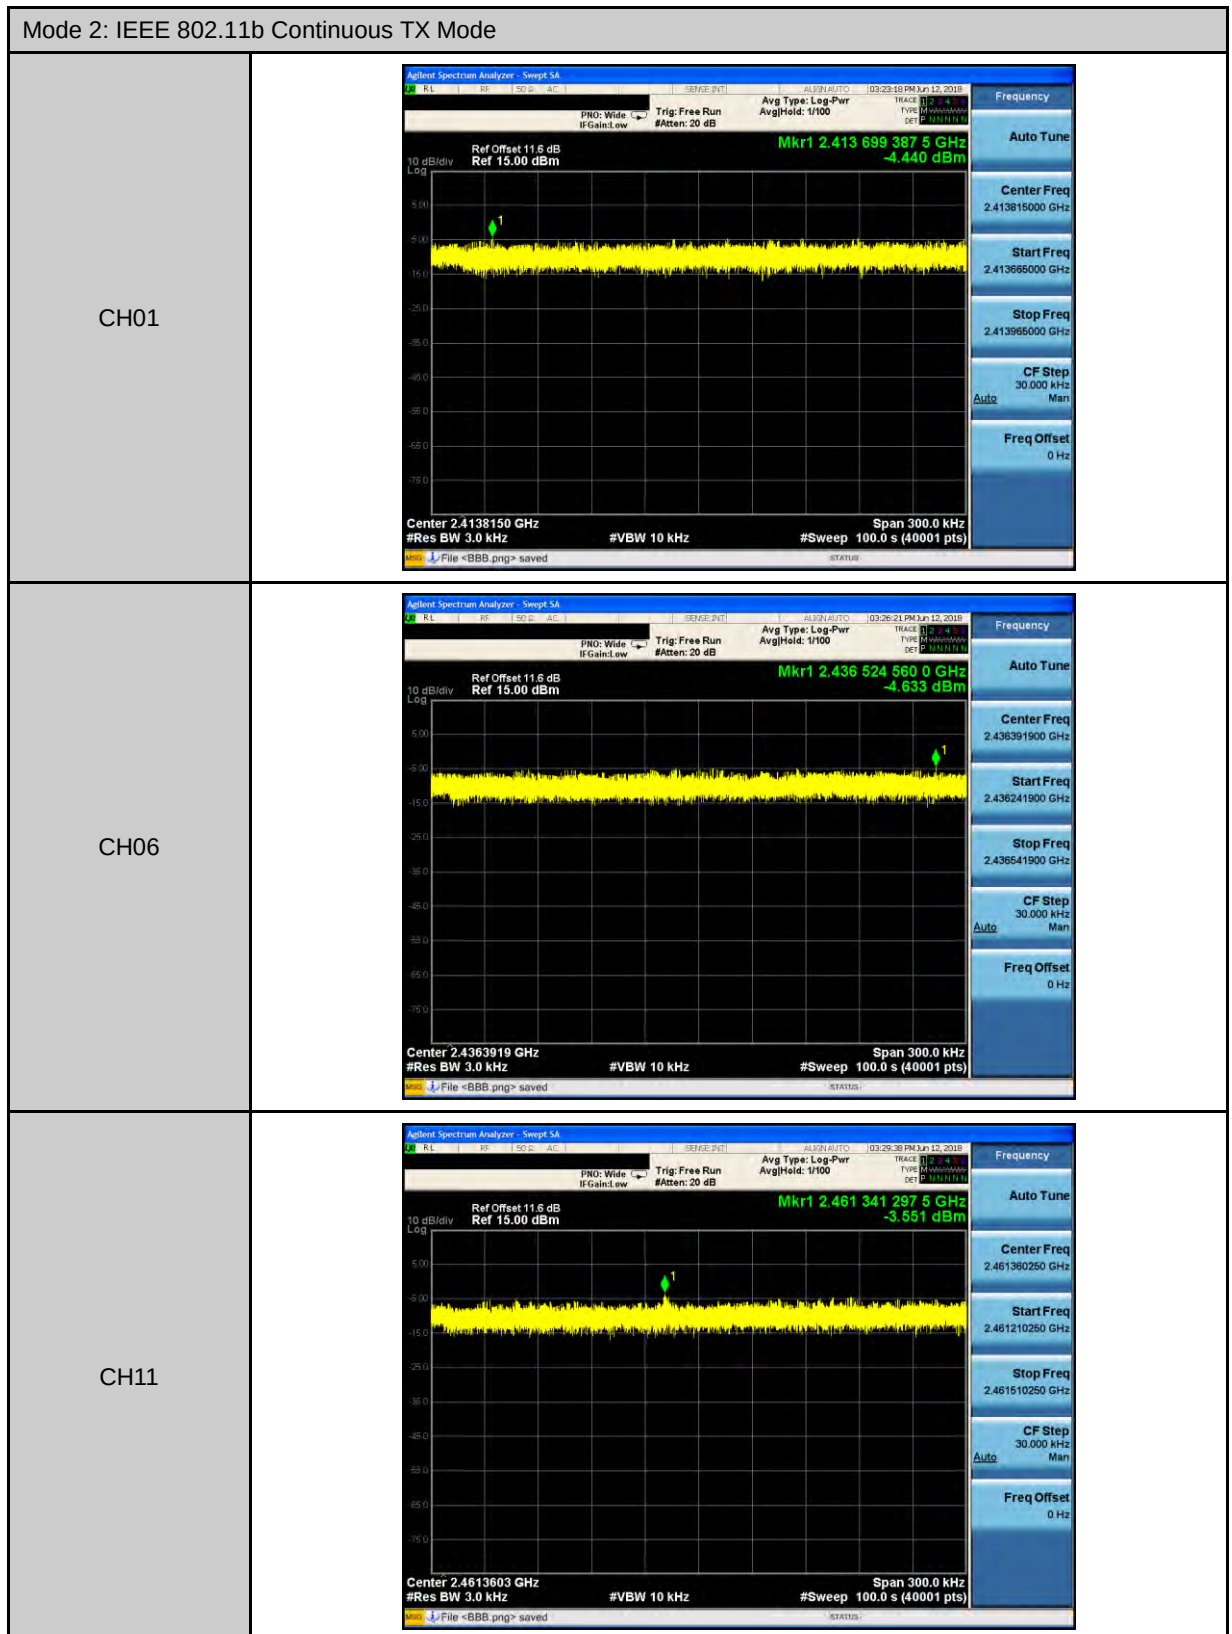


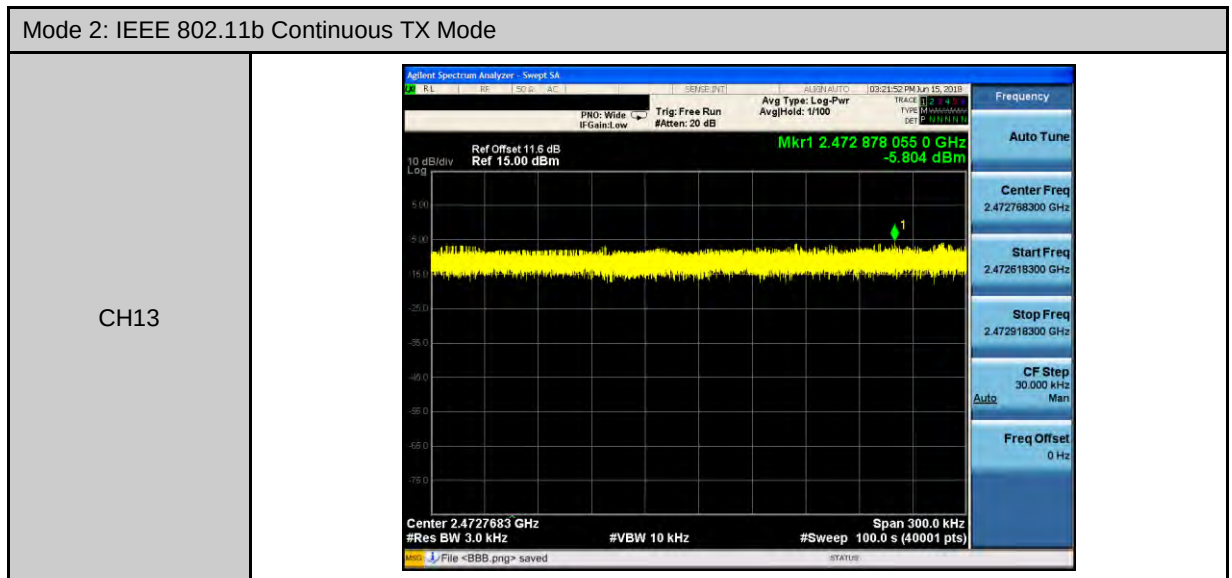

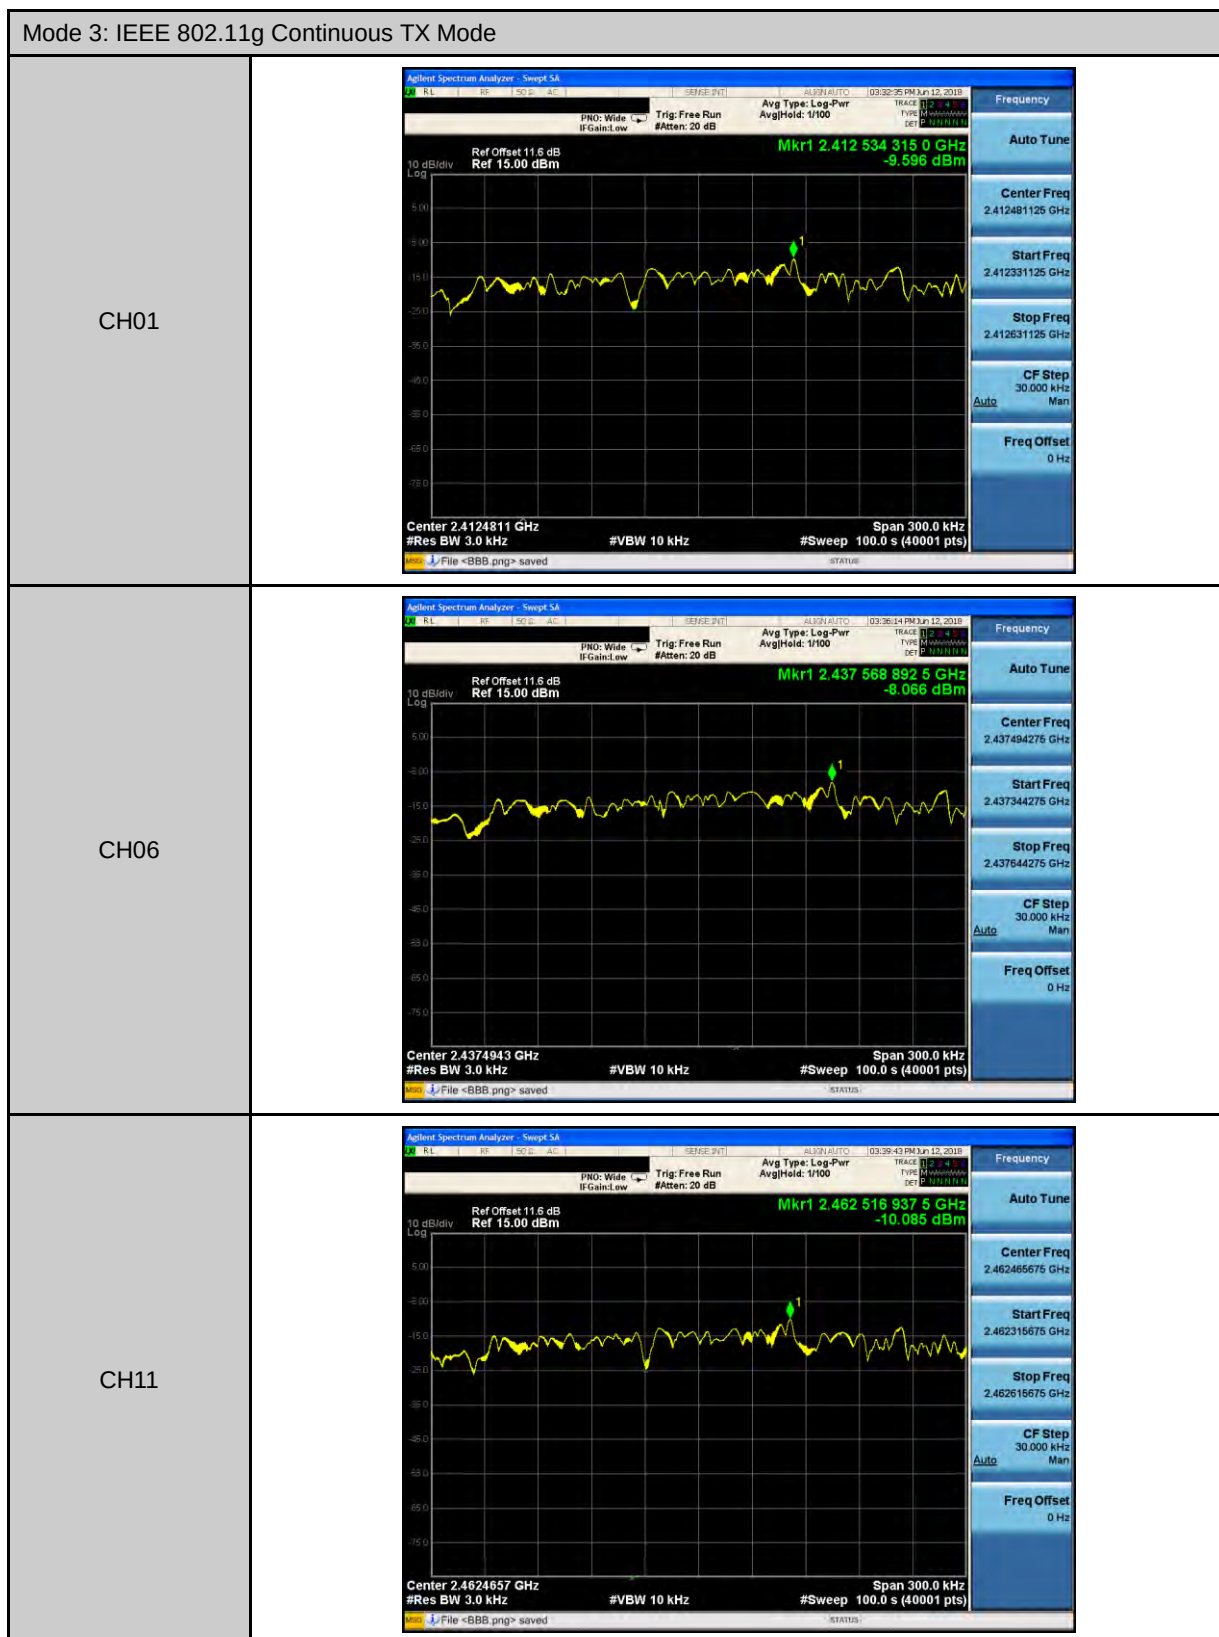

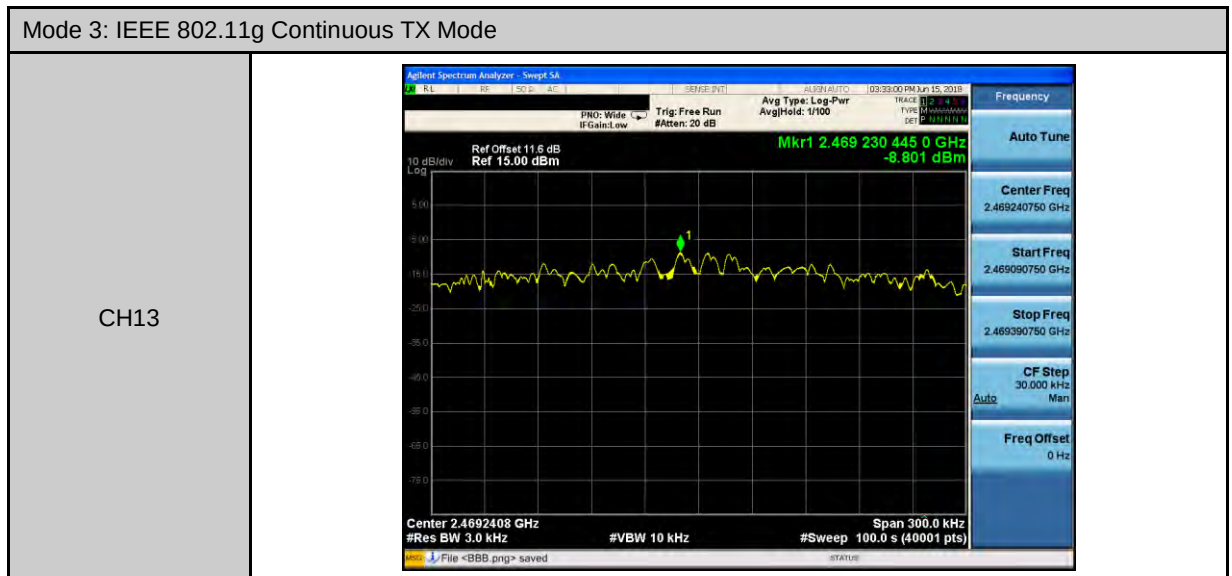

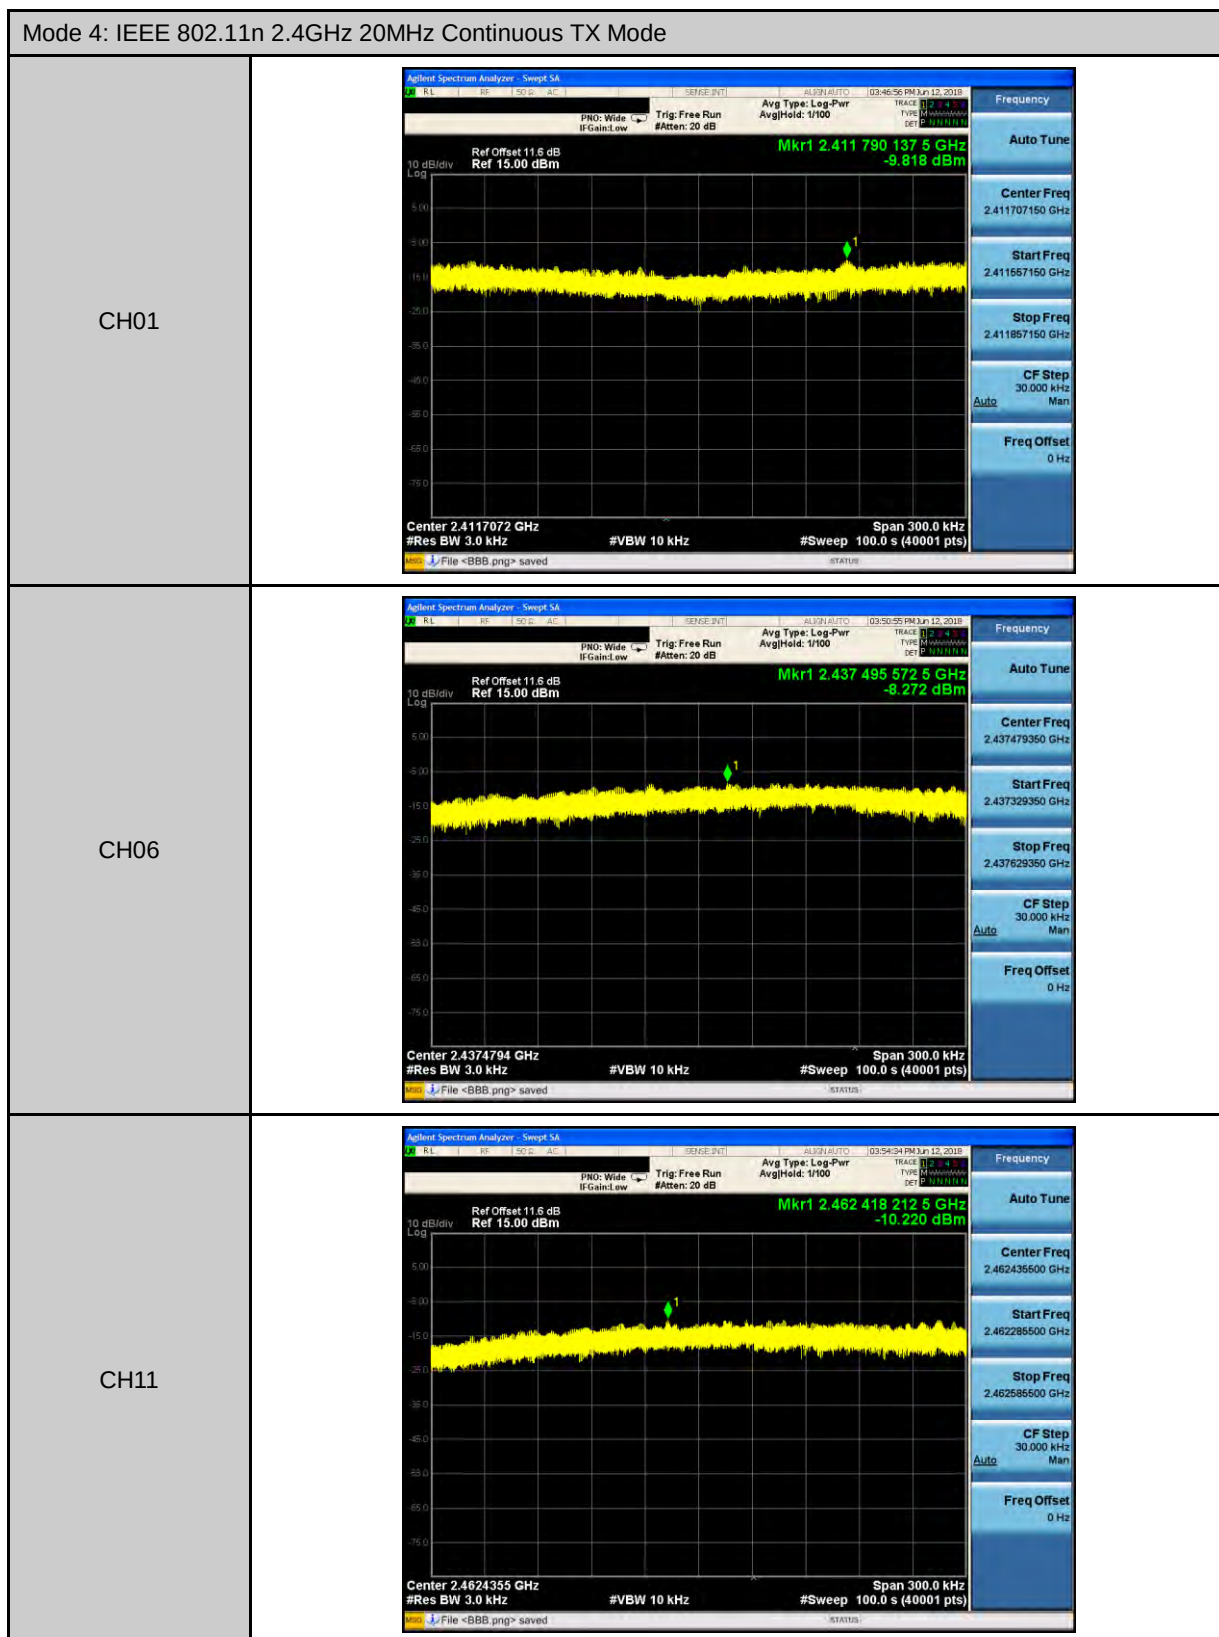

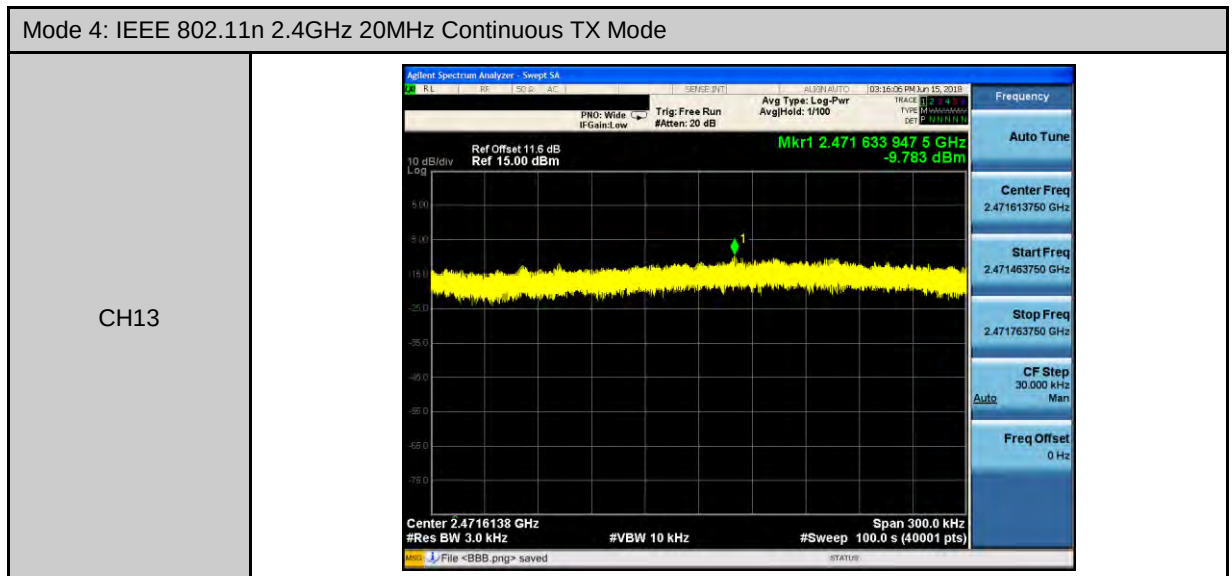

4.2.7 電波暴露量之評估

合格標準：

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符合電波暴露量之要求。限制值如下：

5.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~3.0	614	1.63	*100	6
3~30	1842/f	4.89/f	*900/f ²	6
30~300	61.4	0.163	1.0	6
300~1,500	-----	-----	f/300	6
1,500~100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

5.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~1.34	614	1.63	*100	30
1.34~30	824/f	2.19/f	*180/f ²	30
30~300	27.5	0.073	0.2	30
300~1,500	-----	-----	f/1500	30
1,500~100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

判定結果:

Band	Frequency (MHz)	Limit (mW/cm ²)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm ²)
IEEE 802.11b	2412	1.0	20	17.51	-2.9	0.51	1	28.746	0.0057
	2437	1.0	20	17.72	-2.9	0.51	1	30.170	0.0060
	2462	1.0	20	17.65	-2.9	0.51	1	29.687	0.0059
	2472	1.0	20	17.81	-2.9	0.51	1	30.801	0.0061
IEEE 802.11g	2412	1.0	20	13.55	-2.9	0.51	1	11.550	0.0023
	2437	1.0	20	14.98	-2.9	0.51	1	16.054	0.0032
	2462	1.0	20	13.33	-2.9	0.51	1	10.979	0.0022
	2472	1.0	20	15.01	-2.9	0.51	1	16.165	0.0032
IEEE 802.11n 20MHz	2412	1.0	20	13.37	-2.9	0.51	1	11.081	0.0022
	2437	1.0	20	14.79	-2.9	0.51	1	15.366	0.0031
	2462	1.0	20	13.63	-2.9	0.51	1	11.764	0.0023
	2472	1.0	20	15.39	-2.9	0.51	1	17.643	0.0035

4.3 5GHz U-NII 檢驗項目

4.3.1 場強輻射與非必要頻帶之量測

場強輻射合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。

依據 NCC 低功率射頻電機技術規範第 2.7 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1770.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1865.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2015.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2125.0~2165.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻電機技術規範第 2.8 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻 率 (MHz)	電場強度(μ V/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

非必要頻帶合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.4 節之要：

不必要發射之限值：在操作頻帶外的峰值發射應衰減至符合下列限值：

1. 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻帶操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27dBm/MHz。
2. 在 5.725 GHz~5.850 GHz 的頻帶操作之發射器：所有頻帶邊緣的頻率發射，其有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz；所有頻帶邊緣向外 5 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz；所有頻帶邊緣向外 25 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz；所有頻帶邊緣向外 75 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；所有頻帶邊緣向外 75 MHz 頻率之發射的有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
3. 量測不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。
4. 當測量不必要發射之限值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。
5. 在 1 GHz 以下的不必要之發射，應符合第 2.8 條之規定，任何使用市電為供應電源之設備亦須符合 2.3 條之電源線傳導限值。
6. 不必要發射頻率屬第 2.7 條規定頻帶者，應符合第 2.8 條之規定。

測試方法：

測試場地為開放測試場，將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1GHz 以下之測試配置

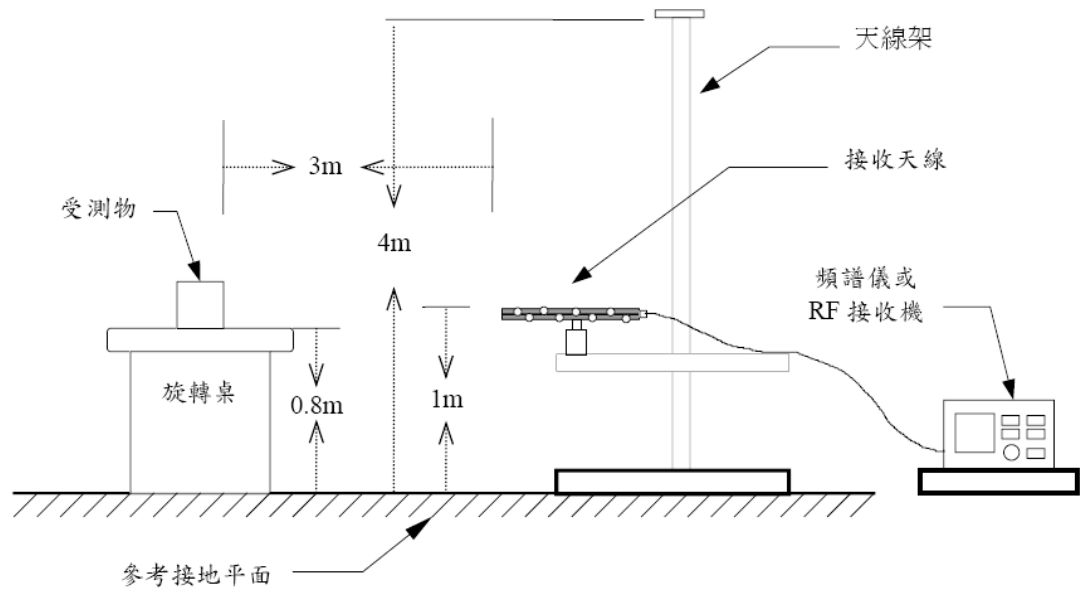

量測頻率高於 1GHz 以上之測試配置

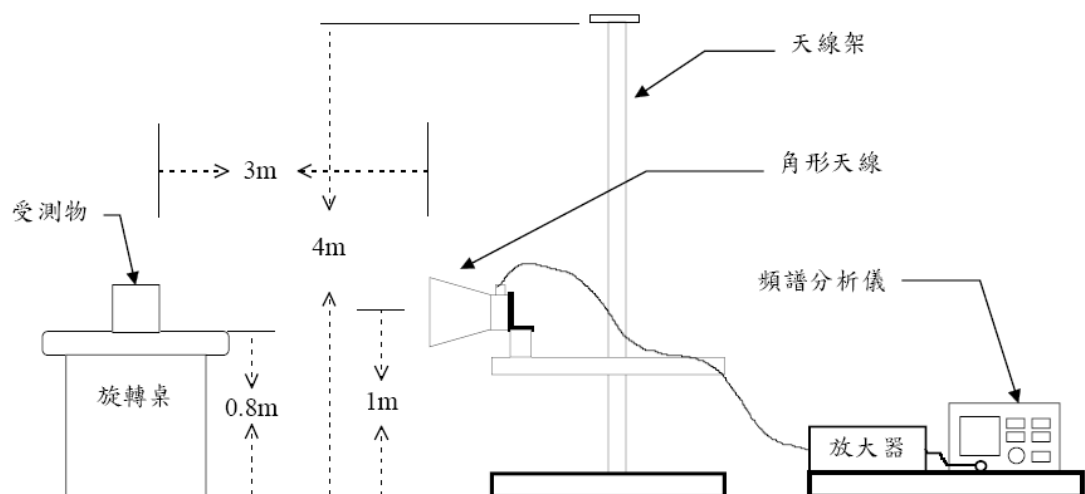


測試結果:

本產品透過預測試確認 X、Y 和 Z 個軸中最差之結果軸向為 X 軸，因此場強輻射完整測試 X 軸並將其結果記錄於報告中。

場強輻射之量測依據輸出峰值功率之量測結果取其最大值之操作模式為場強輻射測試模式。

其它不必要之訊號 (1GHz 以下)

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Horizontal		

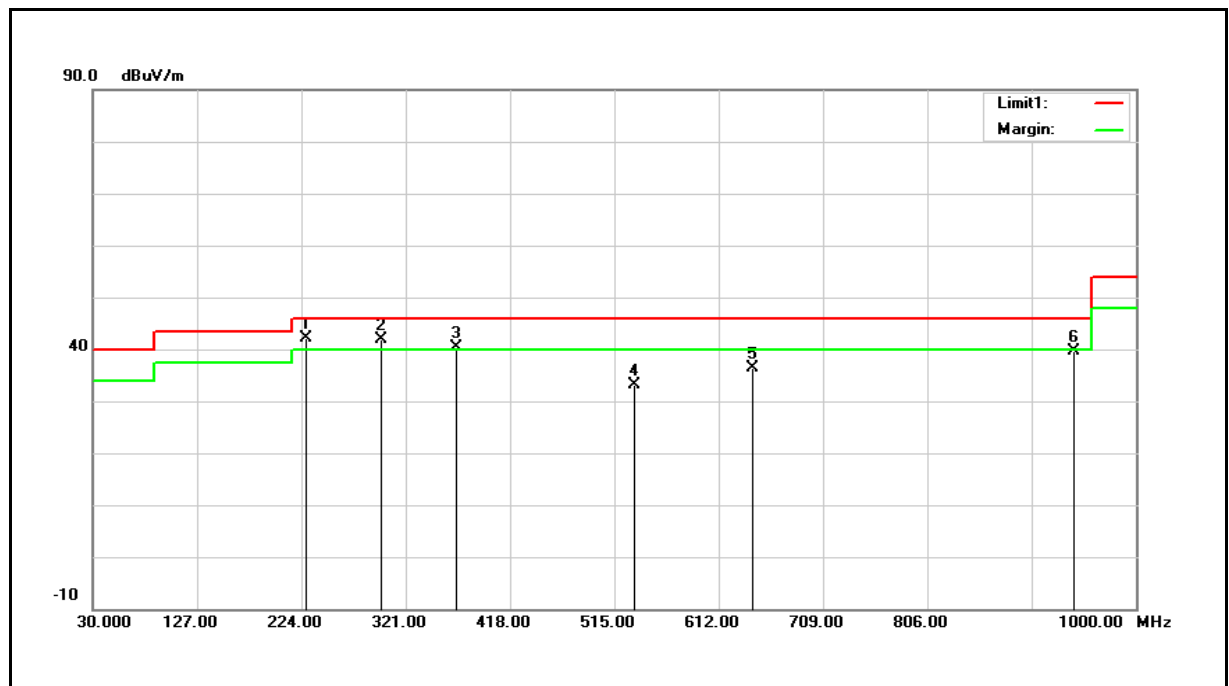


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	228.8500	48.99	-6.92	42.07	46.00	-3.93	QP
2	297.7200	45.65	-3.76	41.89	46.00	-4.11	QP
3	368.5300	42.92	-2.50	40.42	46.00	-5.58	QP
4	533.4300	32.32	0.76	33.08	46.00	-12.92	QP
5	644.0100	33.33	3.07	36.40	46.00	-9.60	QP
6	942.7700	30.85	8.72	39.57	46.00	-6.43	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Vertical		

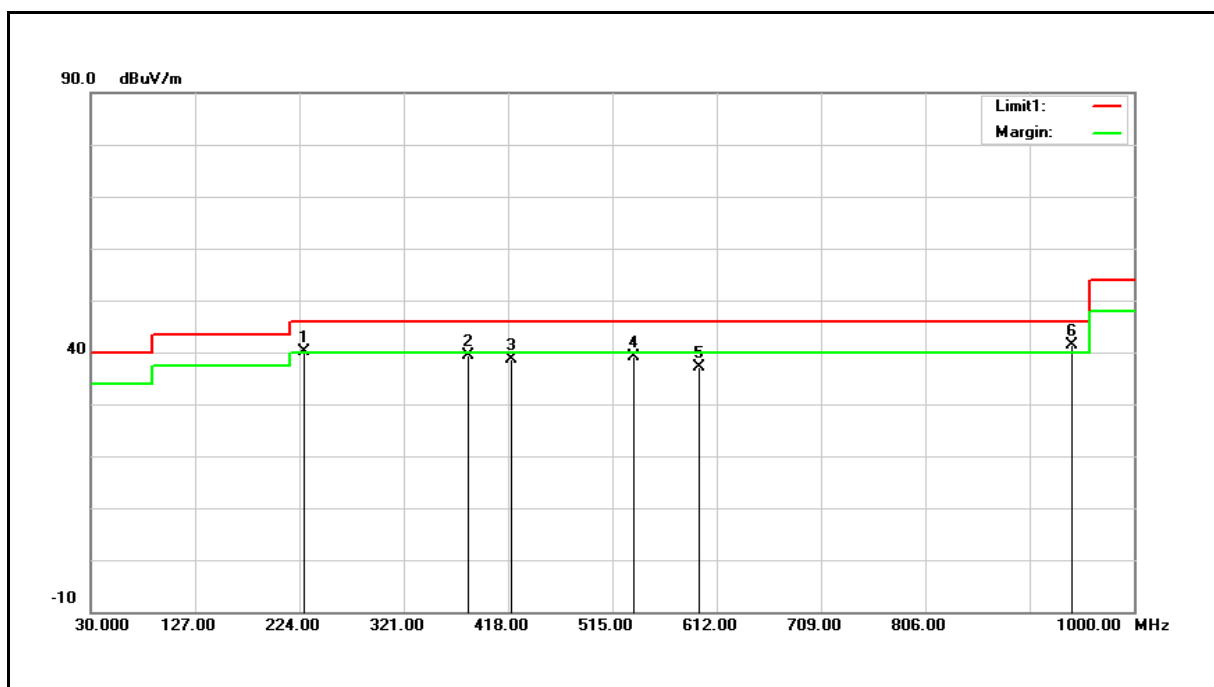

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	228.8500	46.98	-6.92	40.06	46.00	-5.94	QP
2	381.1400	41.69	-2.21	39.48	46.00	-6.52	QP
3	420.9100	39.89	-1.20	38.69	46.00	-7.31	QP
4	535.3700	38.22	0.80	39.02	46.00	-6.98	QP
5	595.5100	34.71	2.34	37.05	46.00	-8.95	QP
6	942.7700	32.54	8.72	41.26	46.00	-4.74	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1GHz 以上)

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

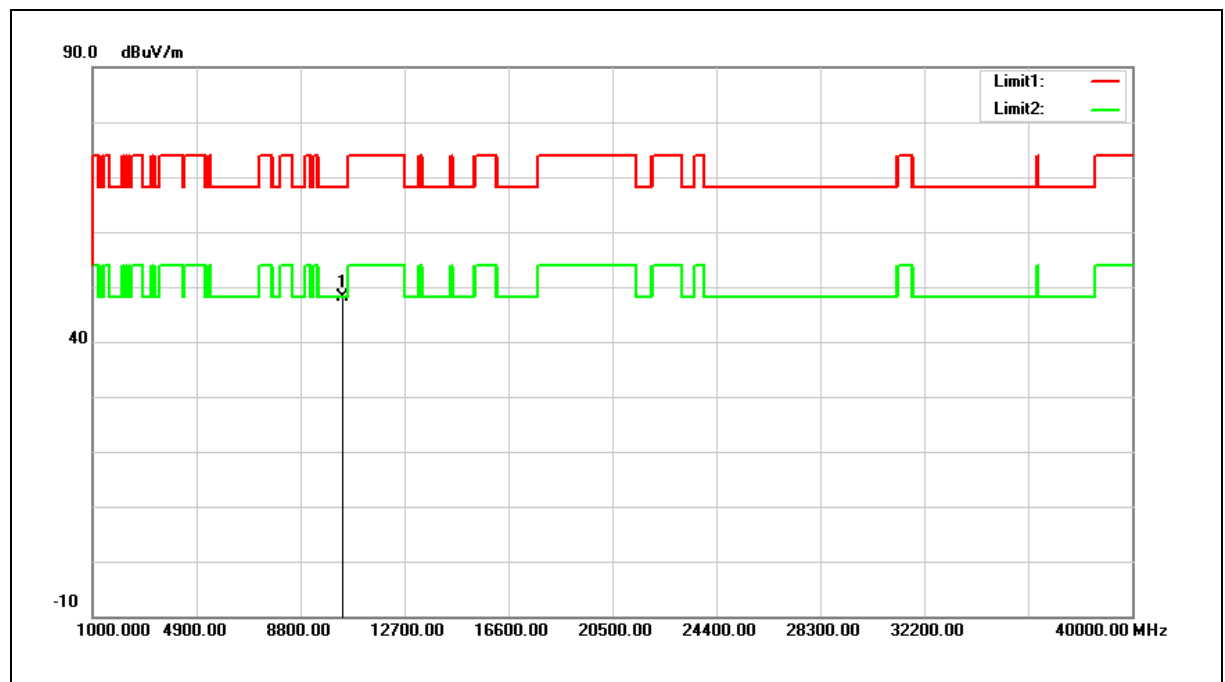


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.37	16.87	48.24	68.20	-19.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

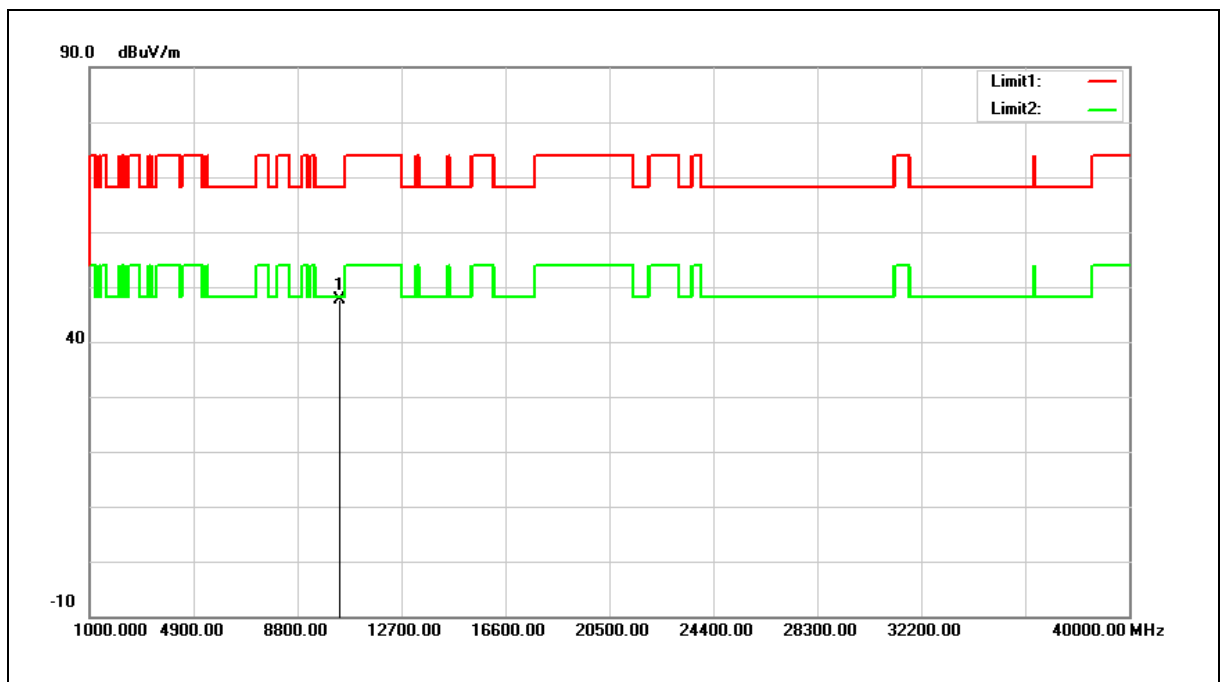


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	30.85	16.87	47.72	68.20	-20.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

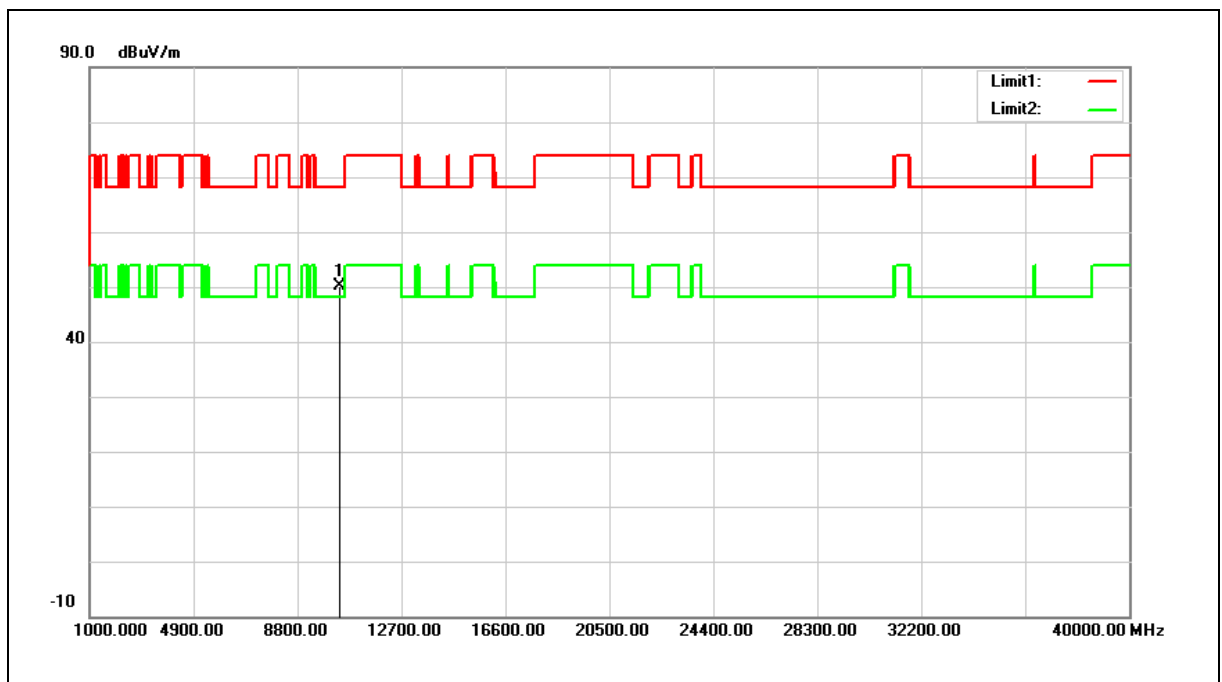


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.07	16.99	50.06	68.20	-18.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

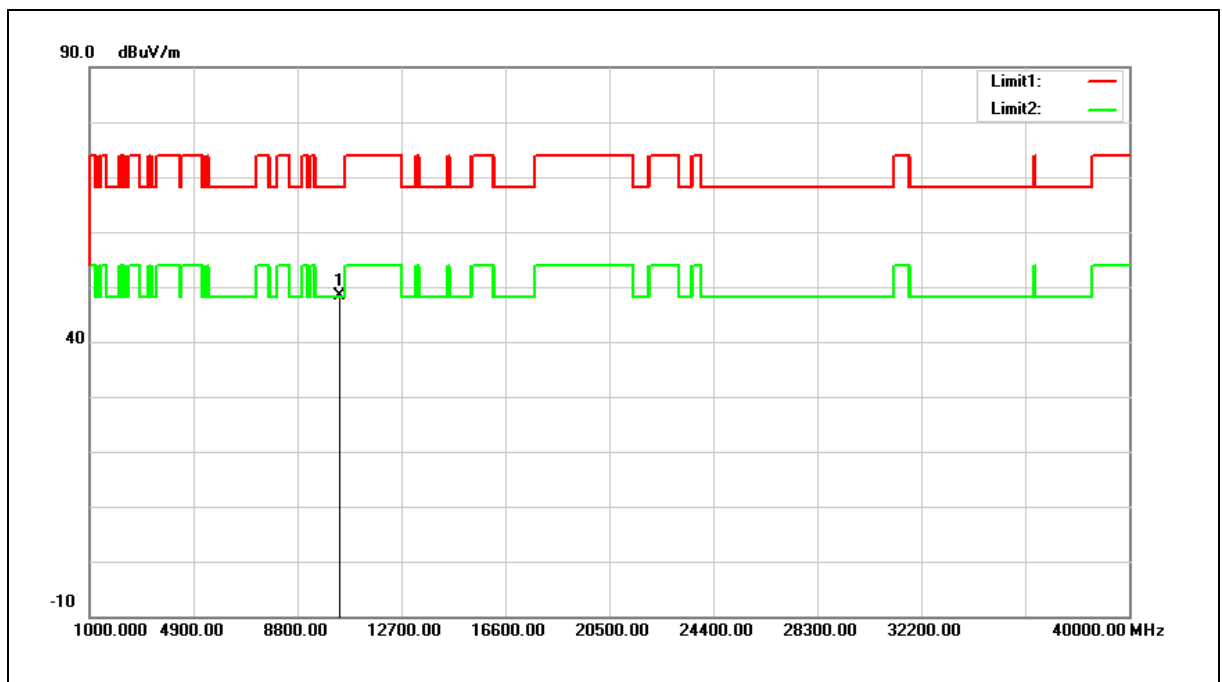


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.45	16.99	48.44	68.20	-19.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

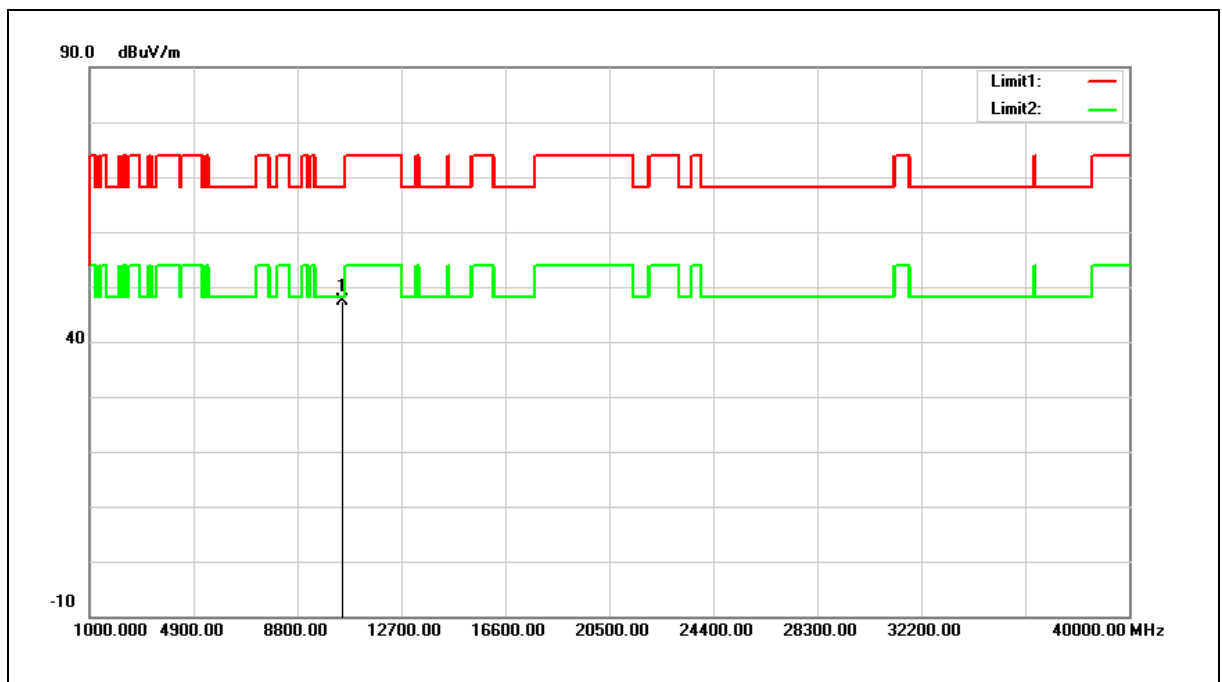


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	30.05	17.23	47.28	68.20	-20.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

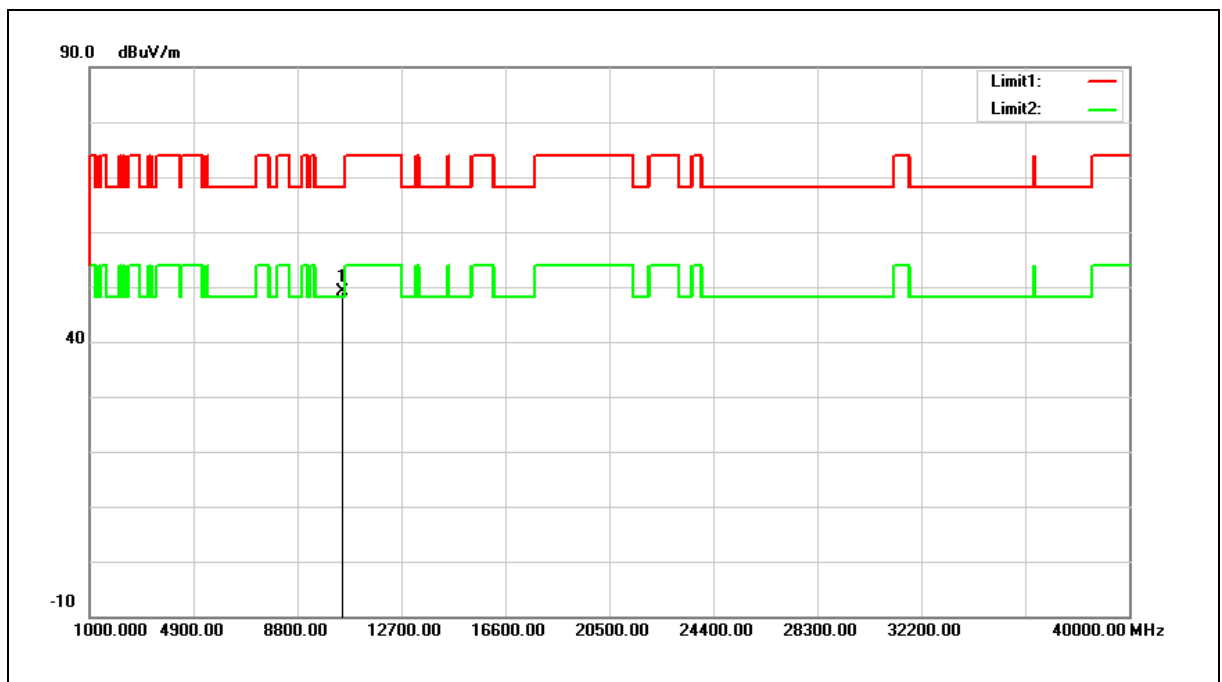


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.82	17.23	49.05	68.20	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

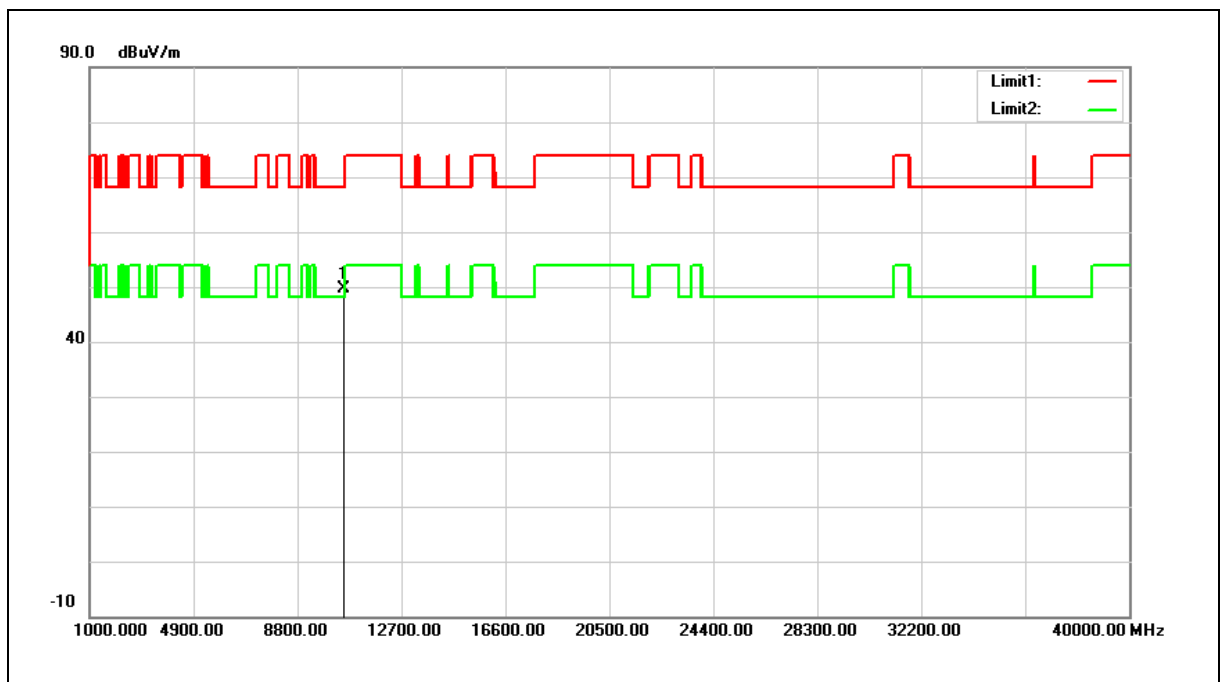


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.28	17.35	49.63	68.20	-18.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

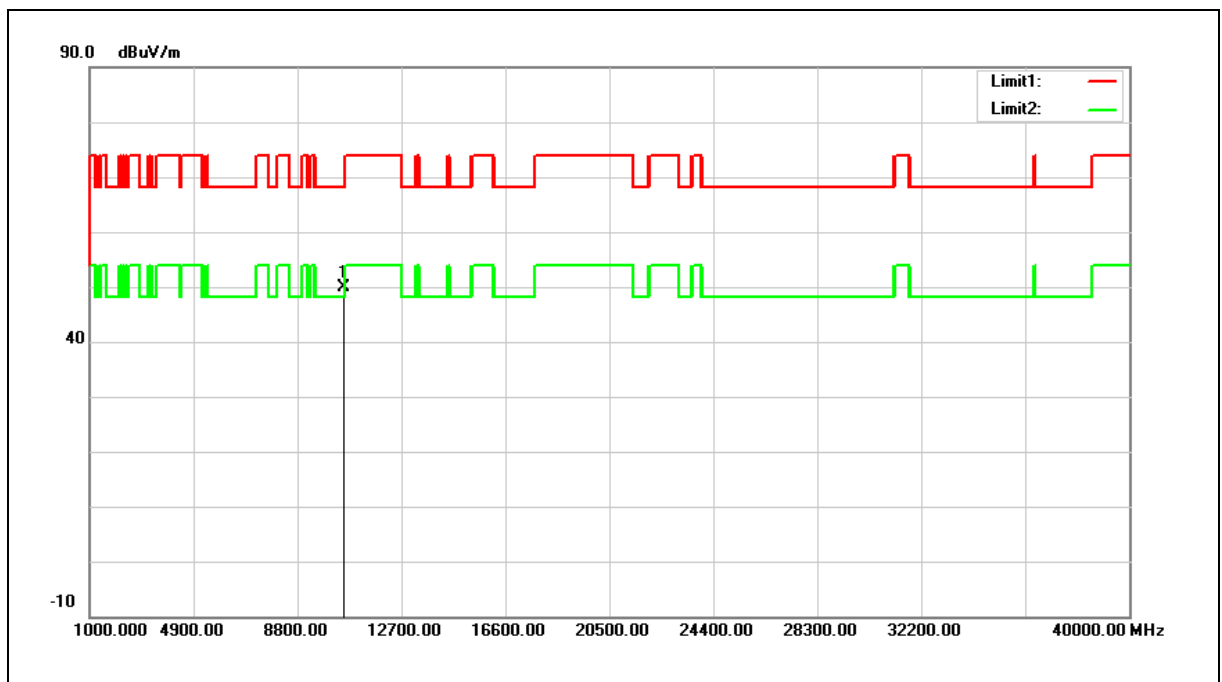


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.57	17.35	49.92	68.20	-18.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

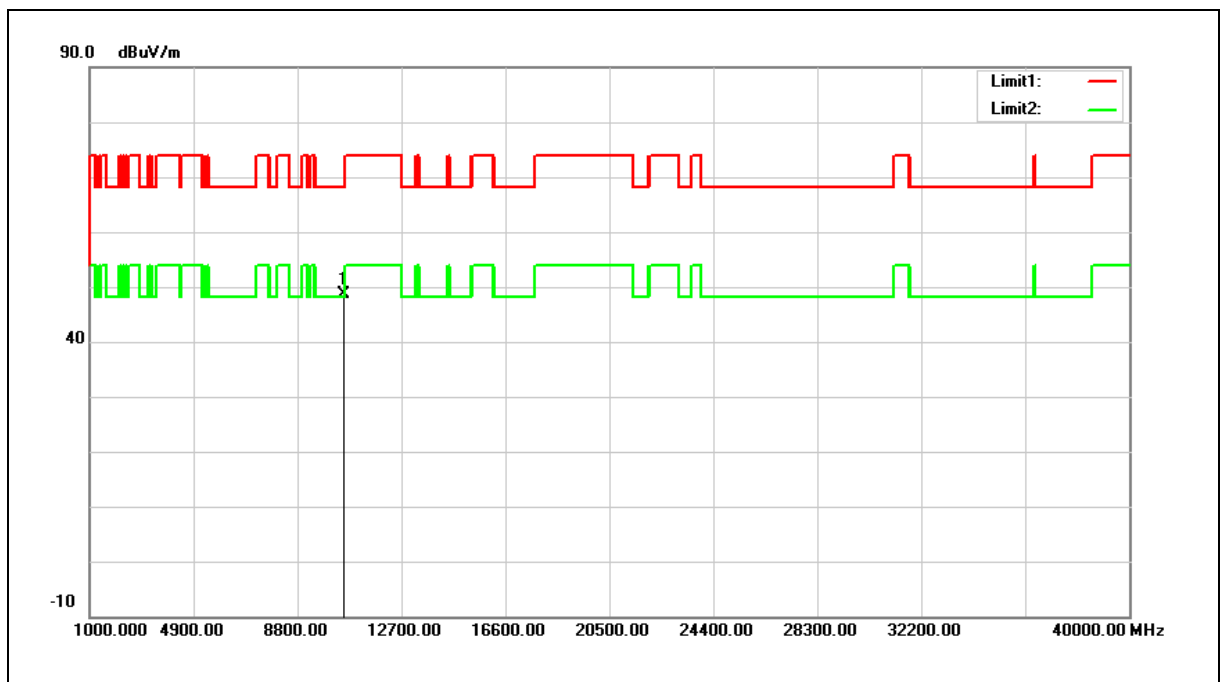


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.29	17.46	48.75	68.20	-19.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

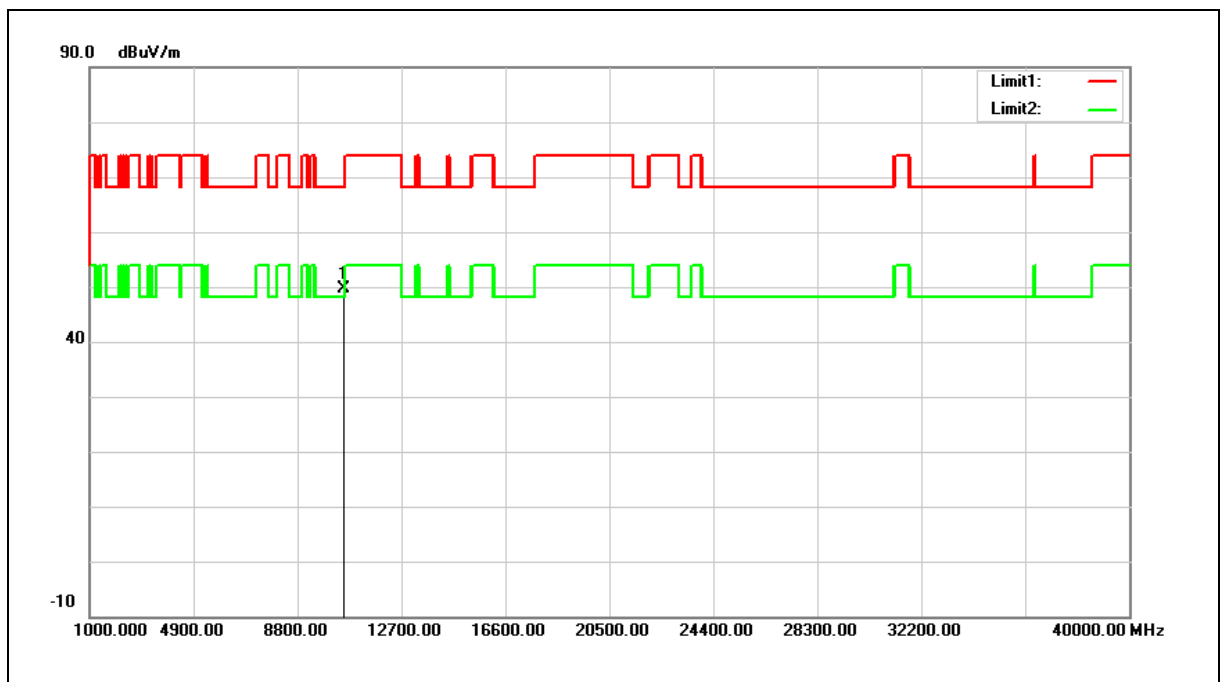


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.27	17.46	49.73	68.20	-18.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

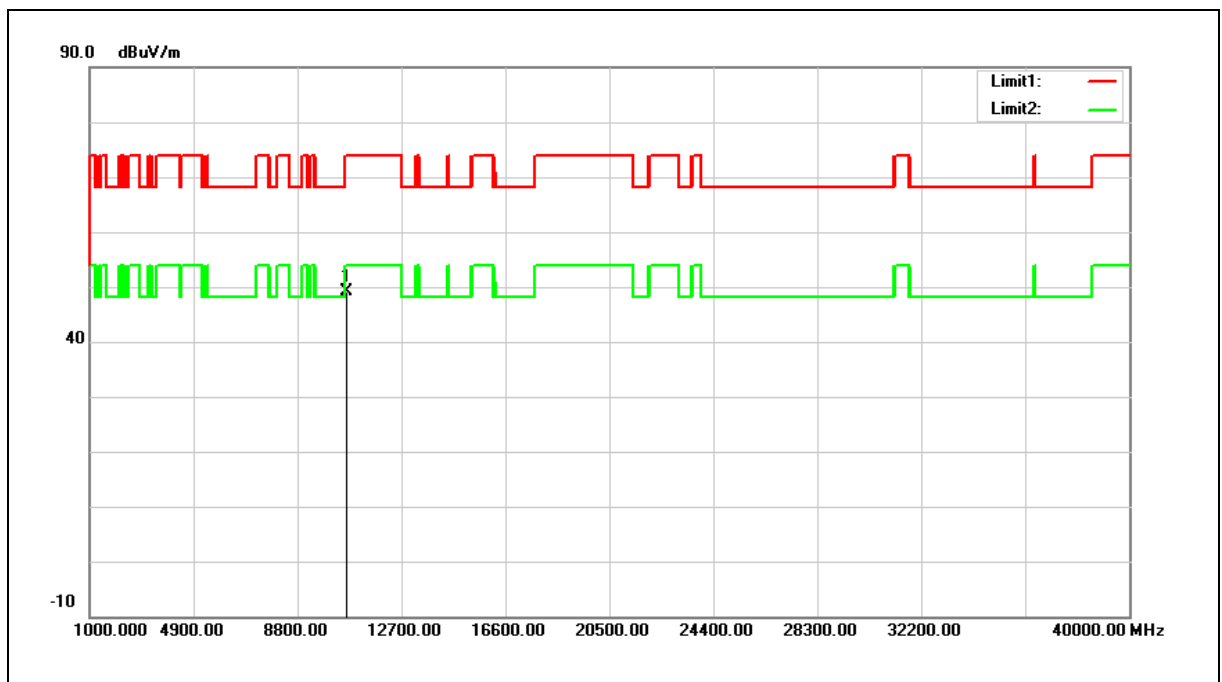


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.47	17.70	49.17	74.00	-24.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

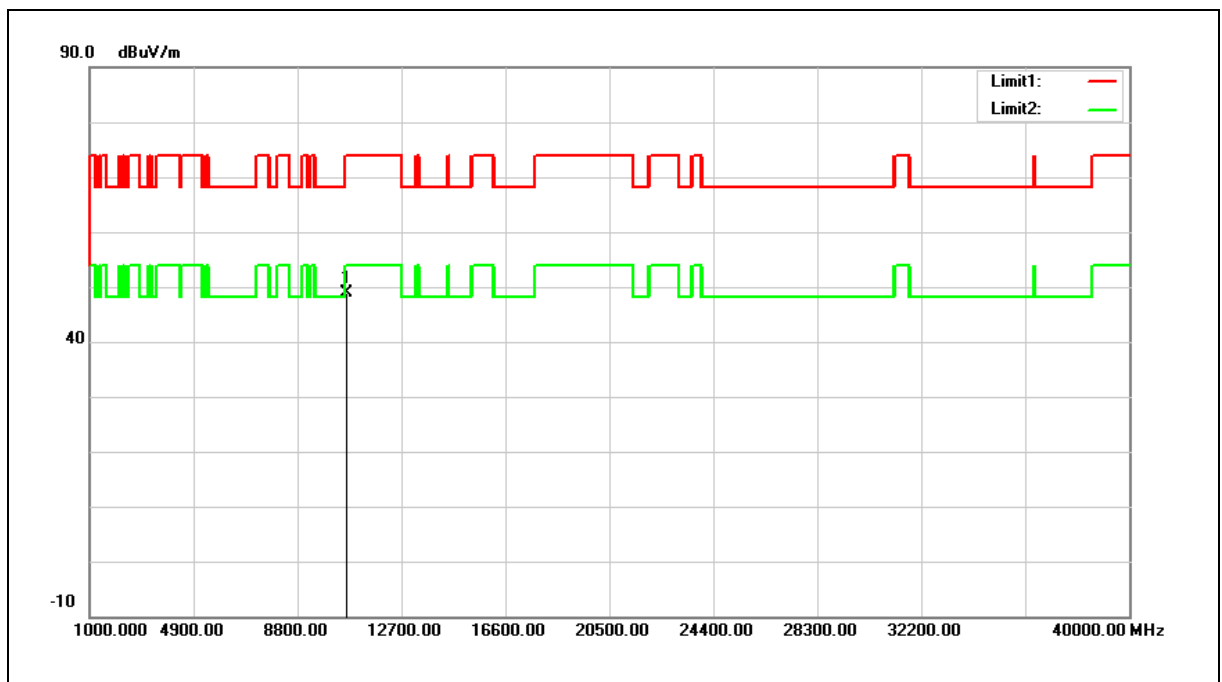


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.23	17.70	48.93	74.00	-25.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

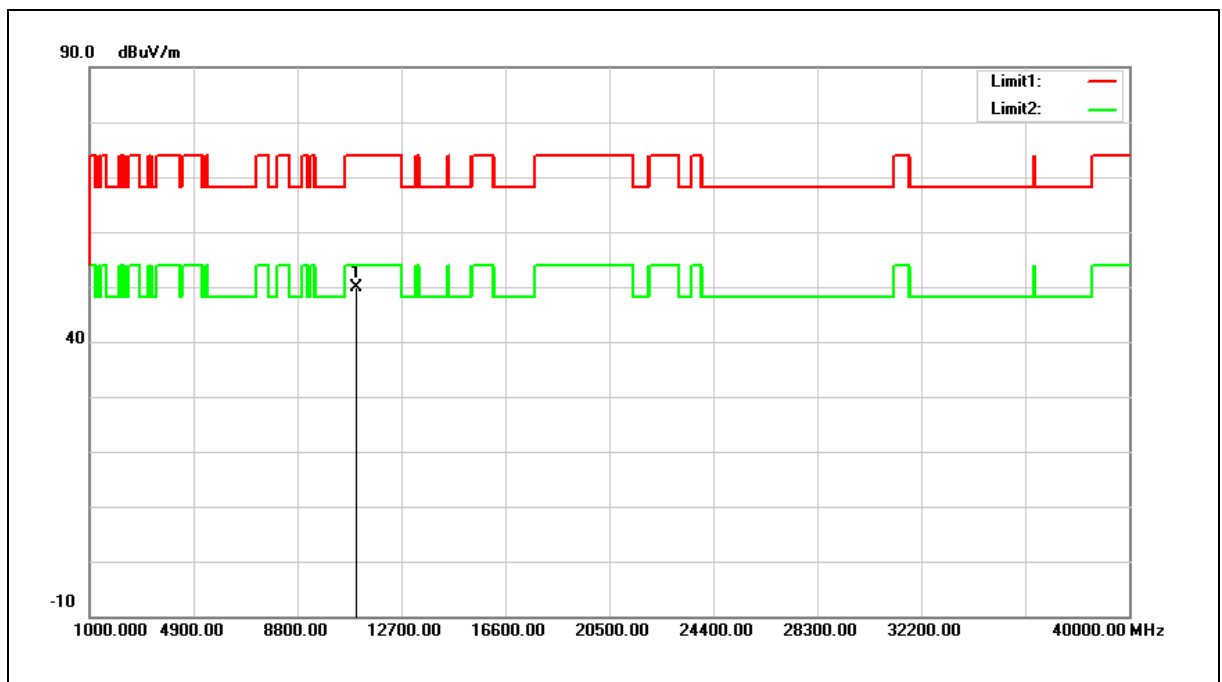


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	31.18	18.74	49.92	74.00	-24.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

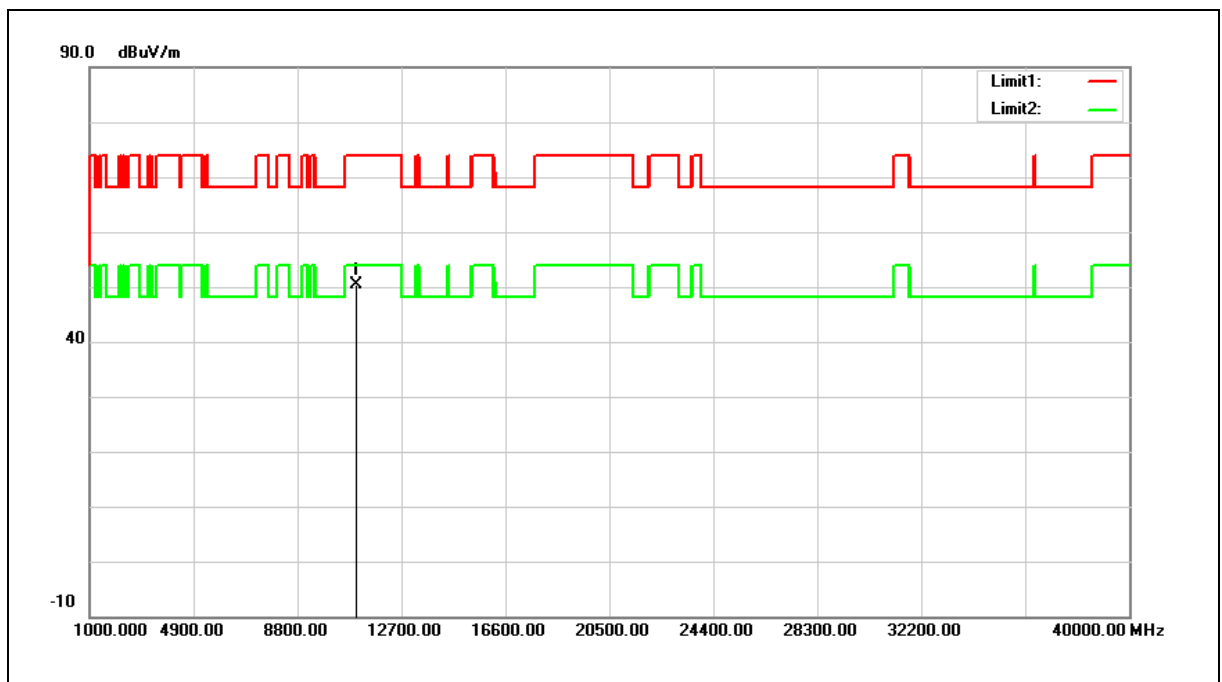


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	31.52	18.74	50.26	74.00	-23.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

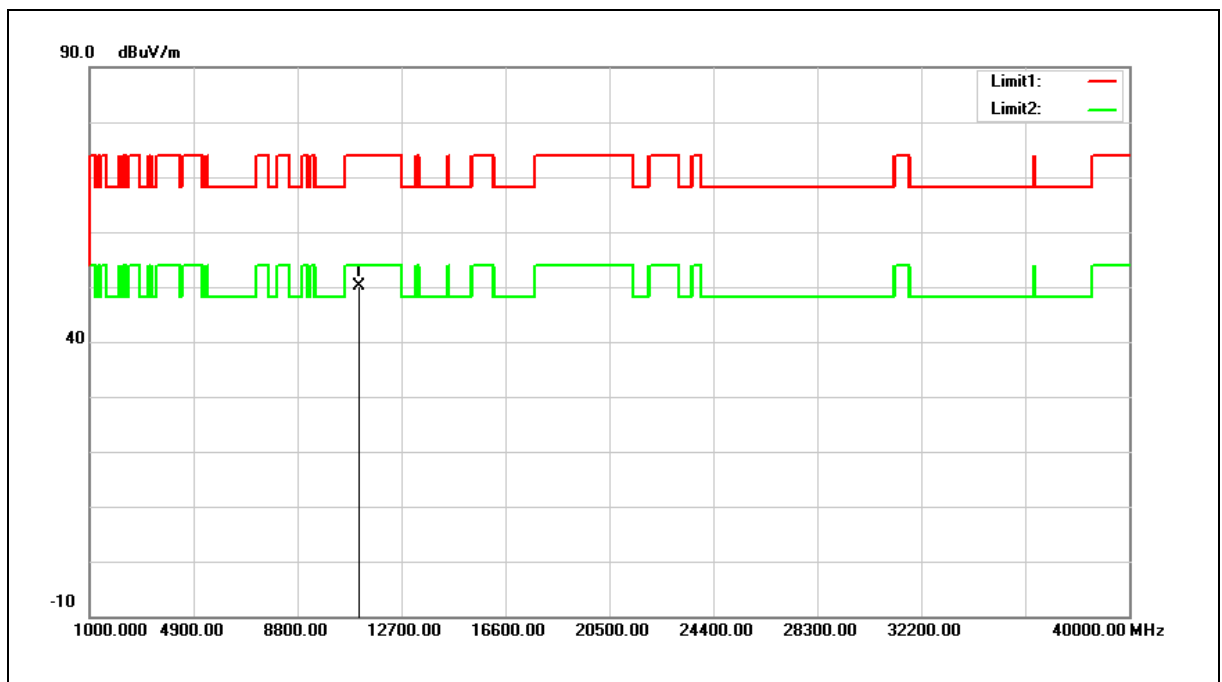


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	31.23	18.82	50.05	74.00	-23.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

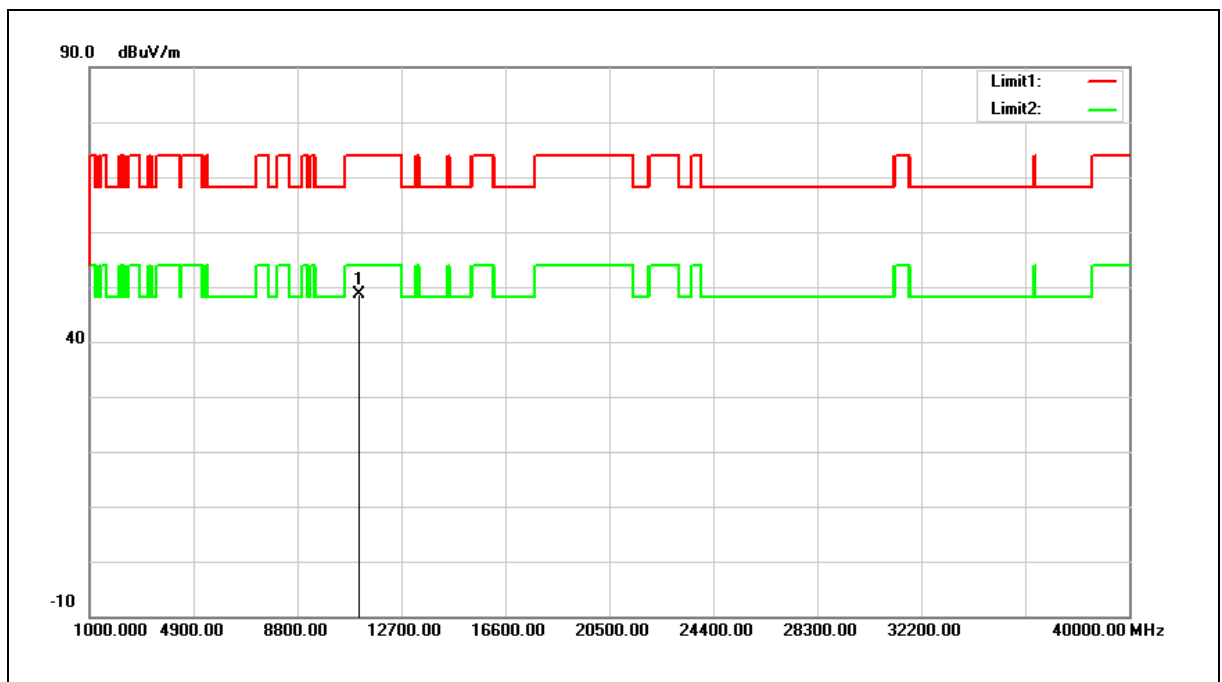


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	29.87	18.82	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

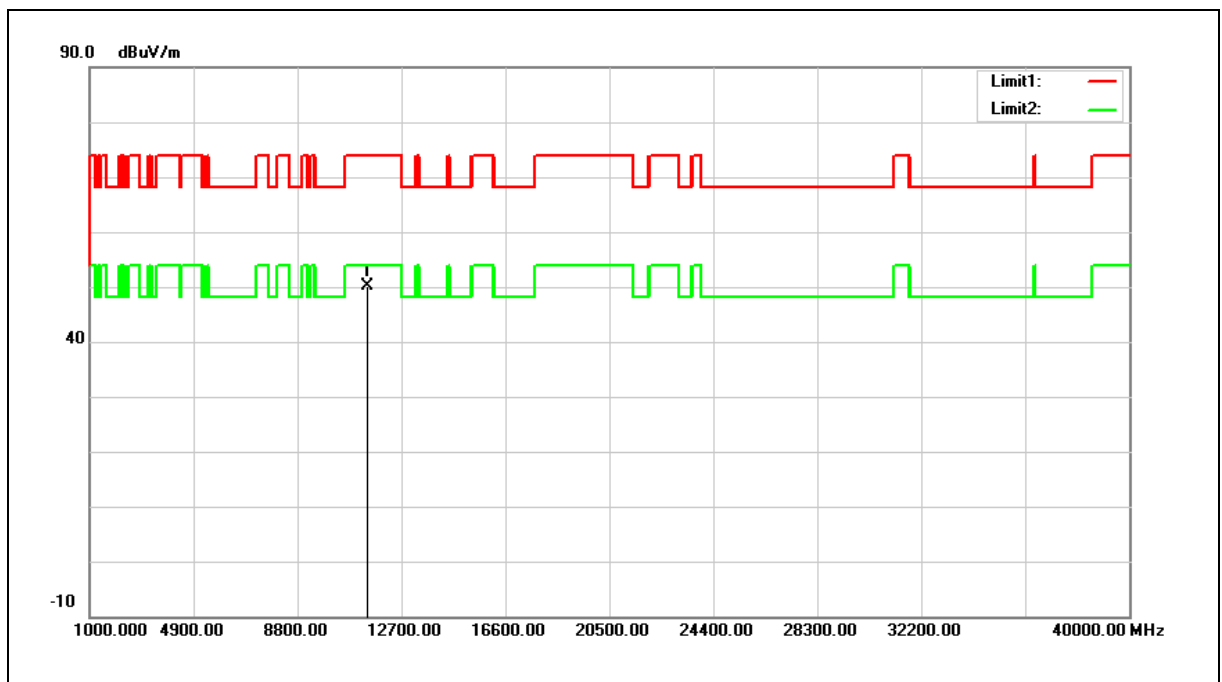


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.15	19.01	50.16	74.00	-23.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

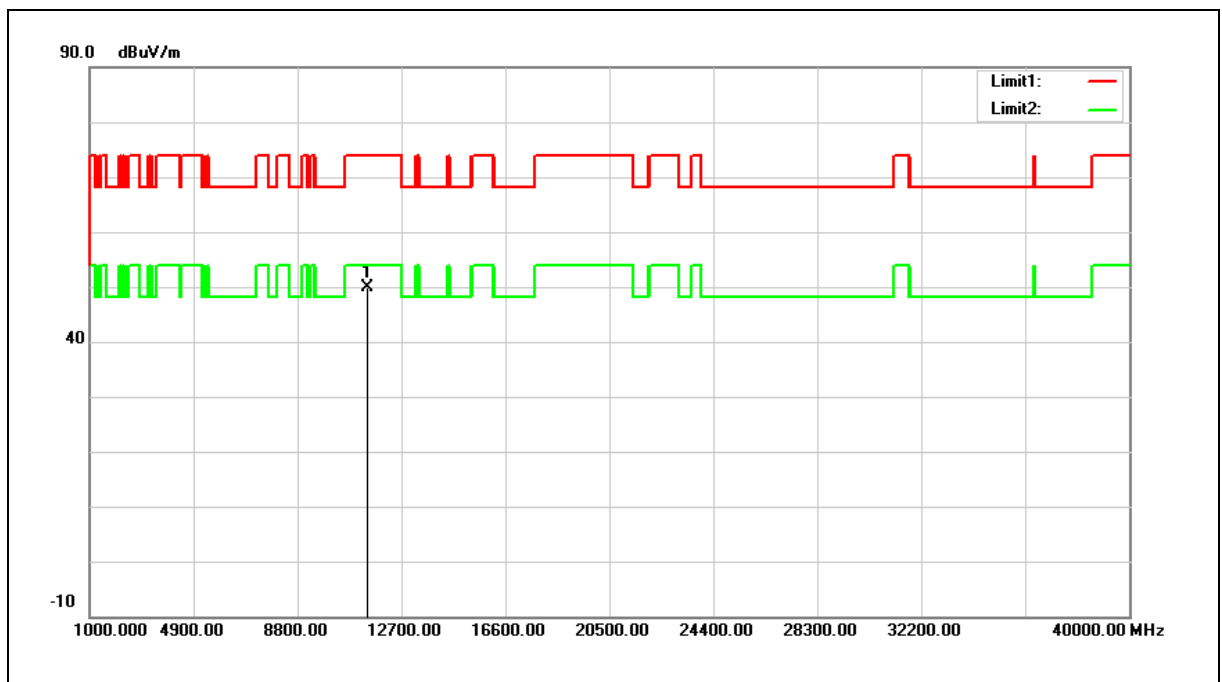


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	30.85	19.01	49.86	74.00	-24.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

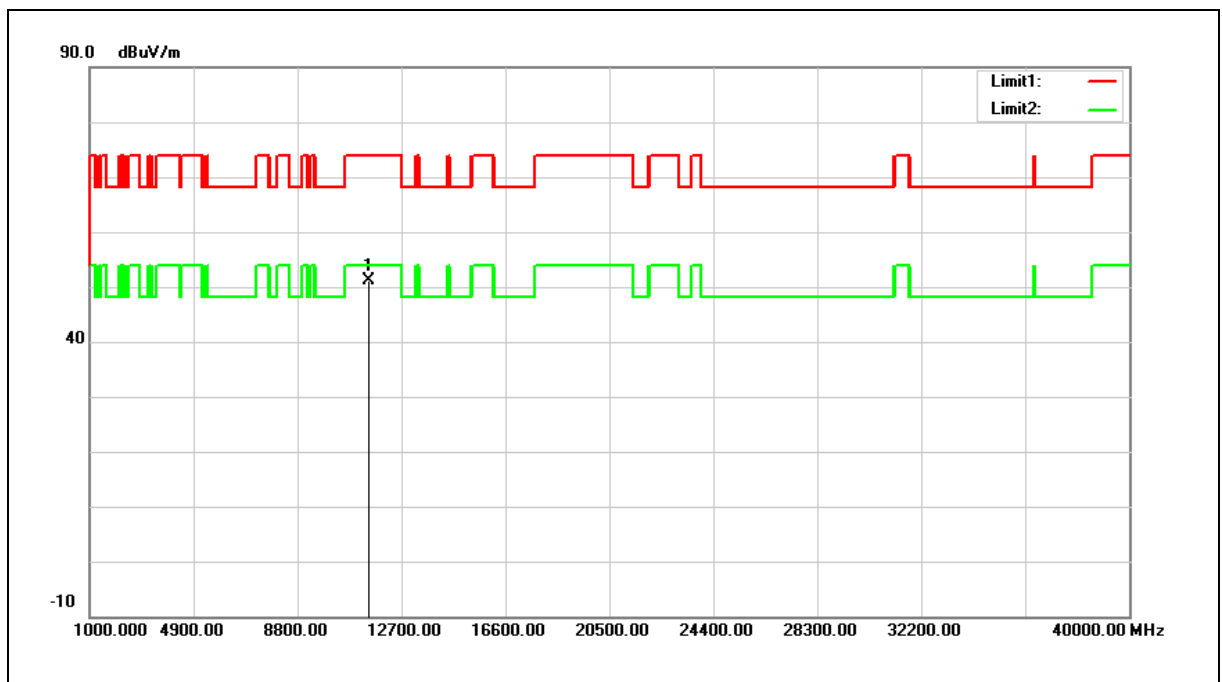


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.16	19.07	51.23	74.00	-22.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

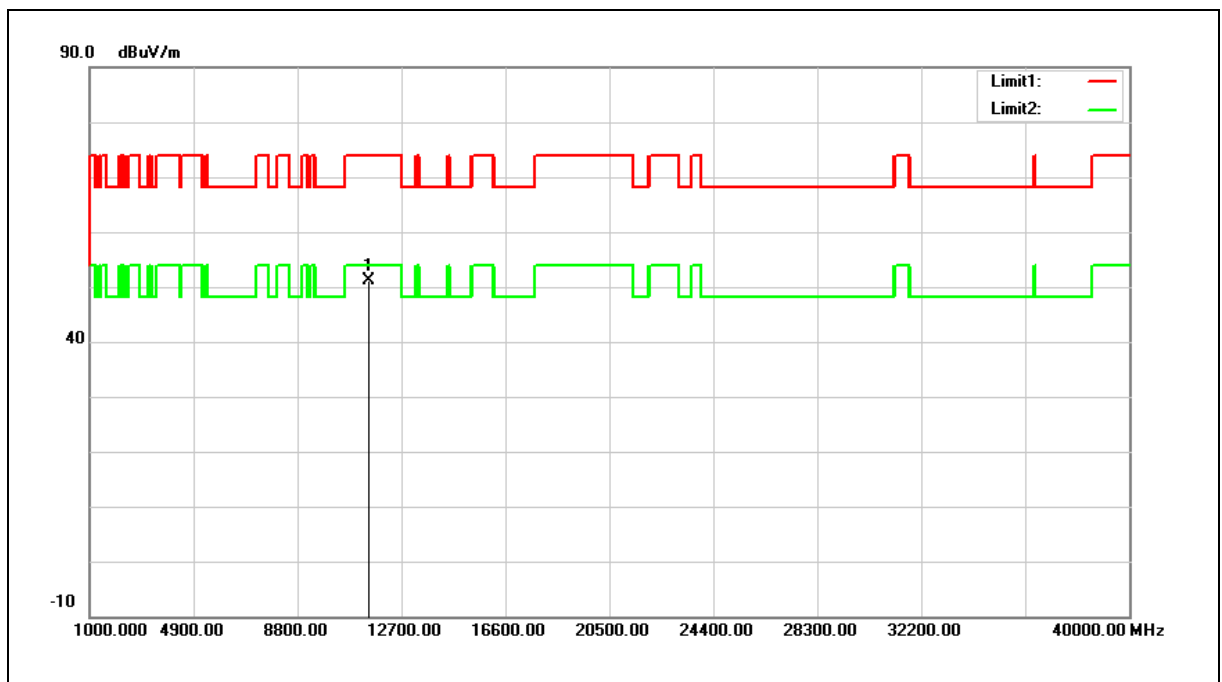


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.96	19.07	51.03	74.00	-22.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

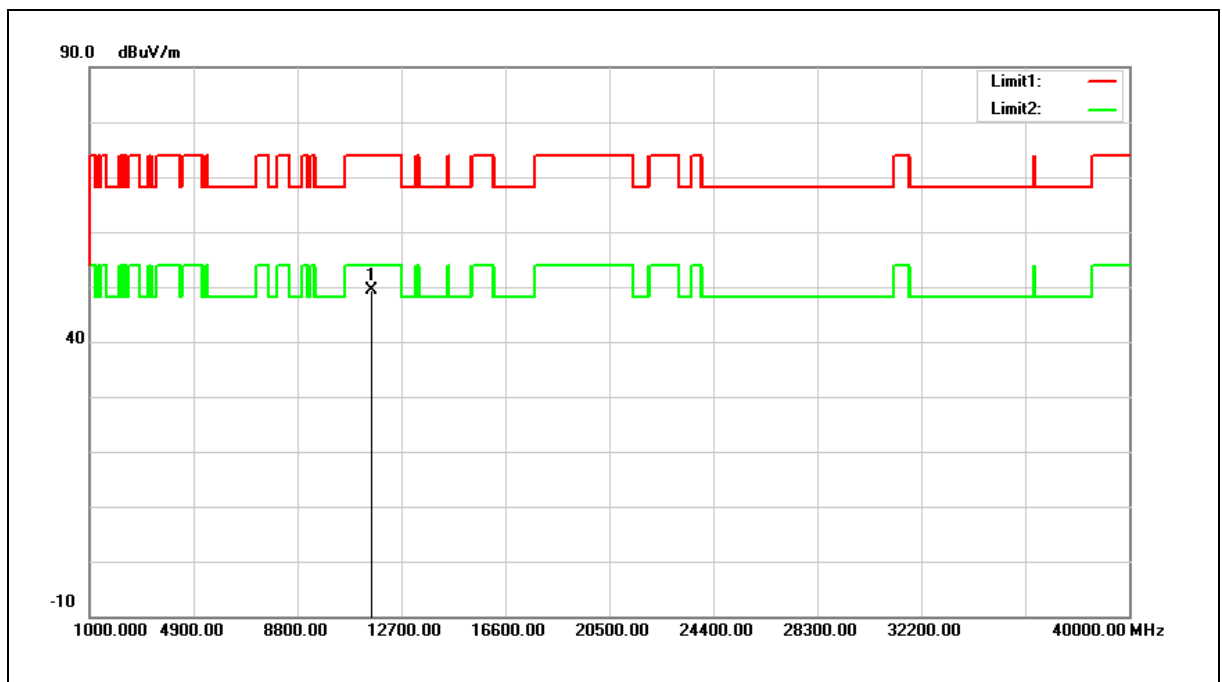


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.31	18.98	49.29	74.00	-24.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

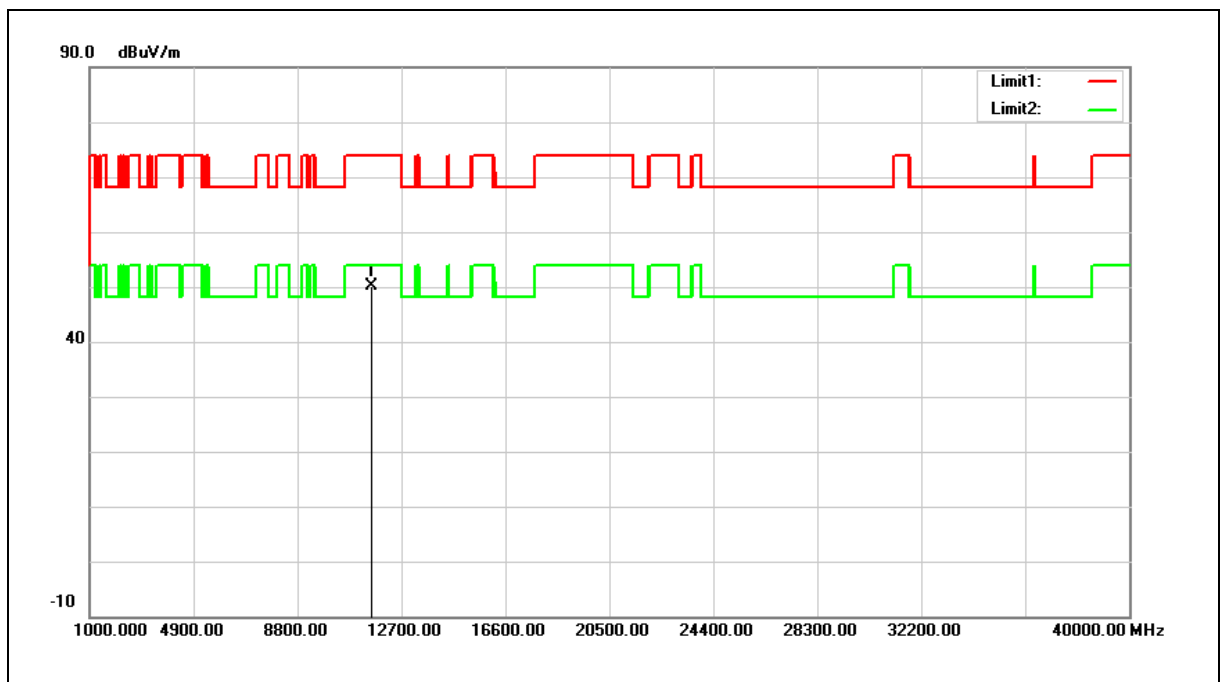


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.20	18.98	50.18	74.00	-23.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

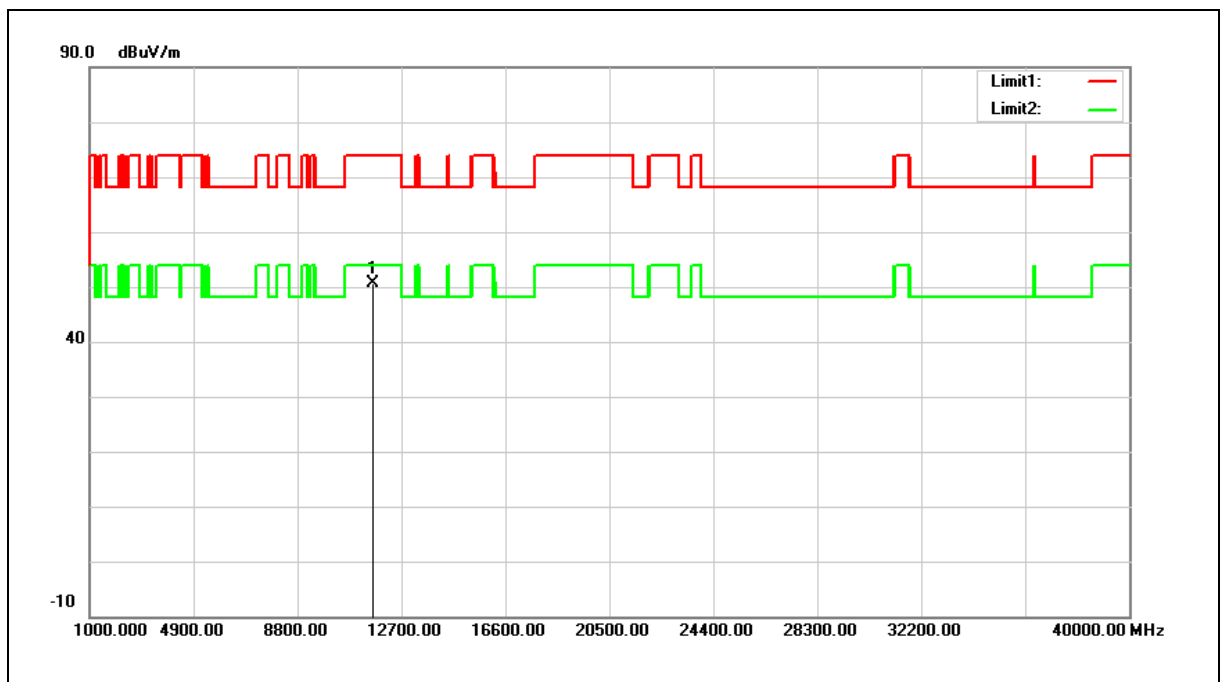


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.84	18.87	50.71	74.00	-23.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

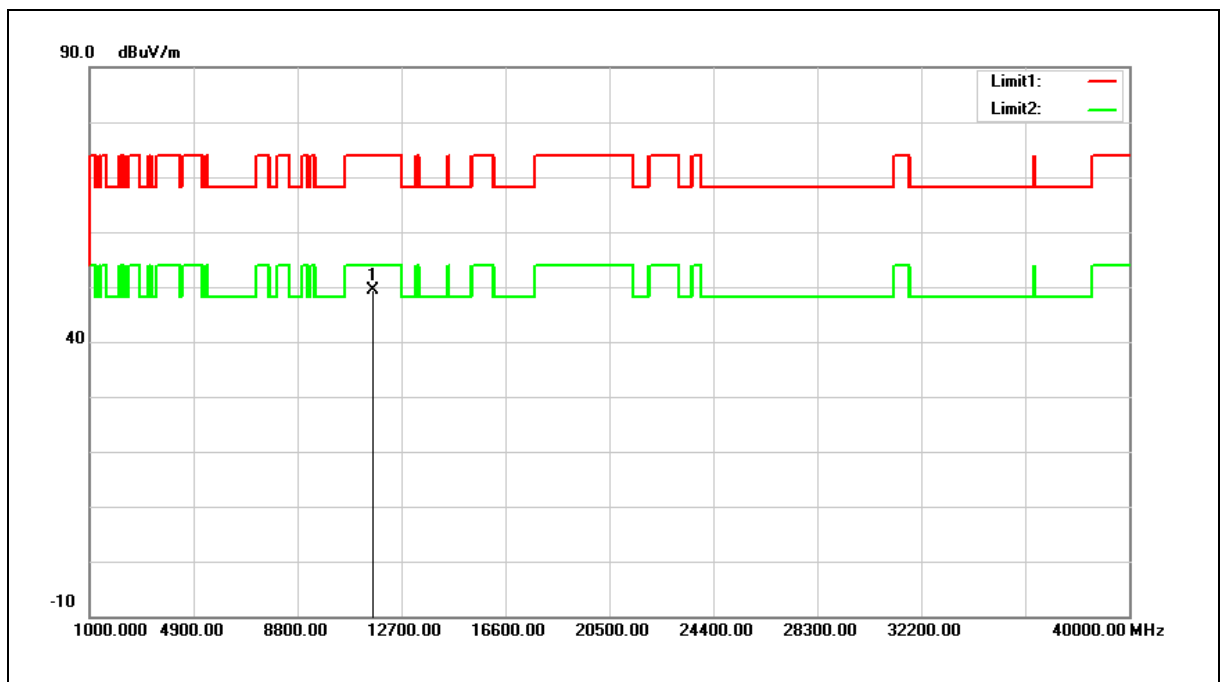


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.50	18.87	49.37	74.00	-24.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

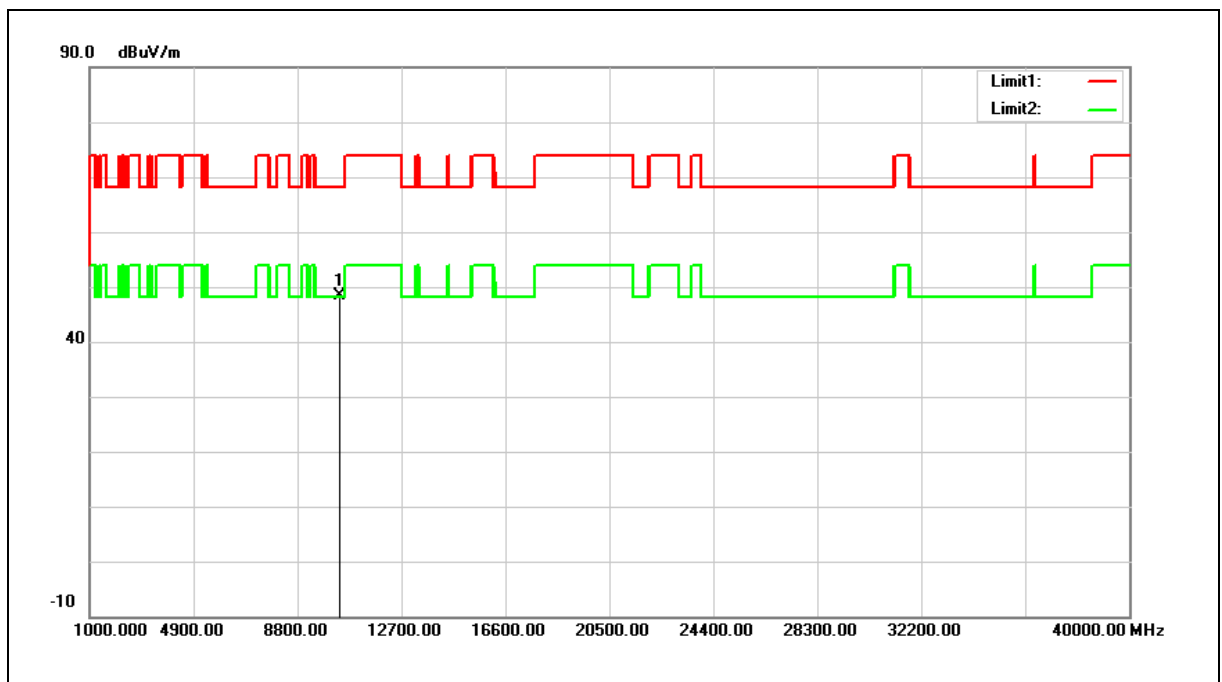


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.52	16.87	48.39	68.20	-19.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

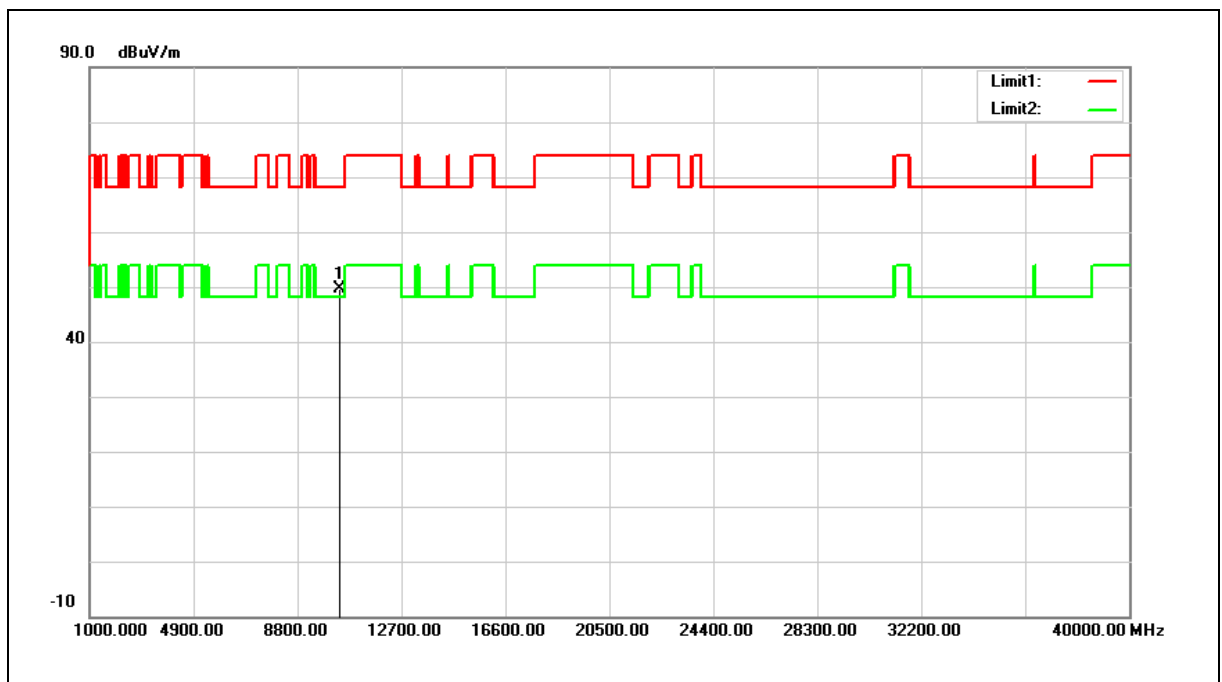


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.72	16.87	49.59	68.20	-18.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

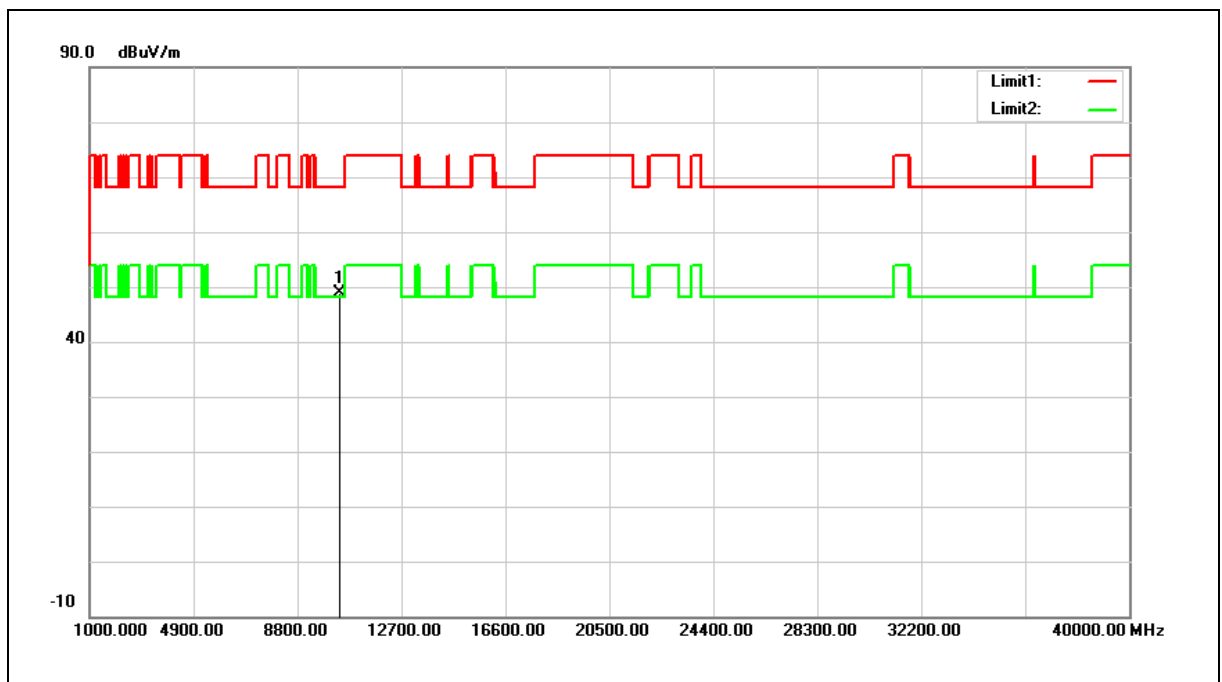


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.81	16.99	48.80	68.20	-19.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

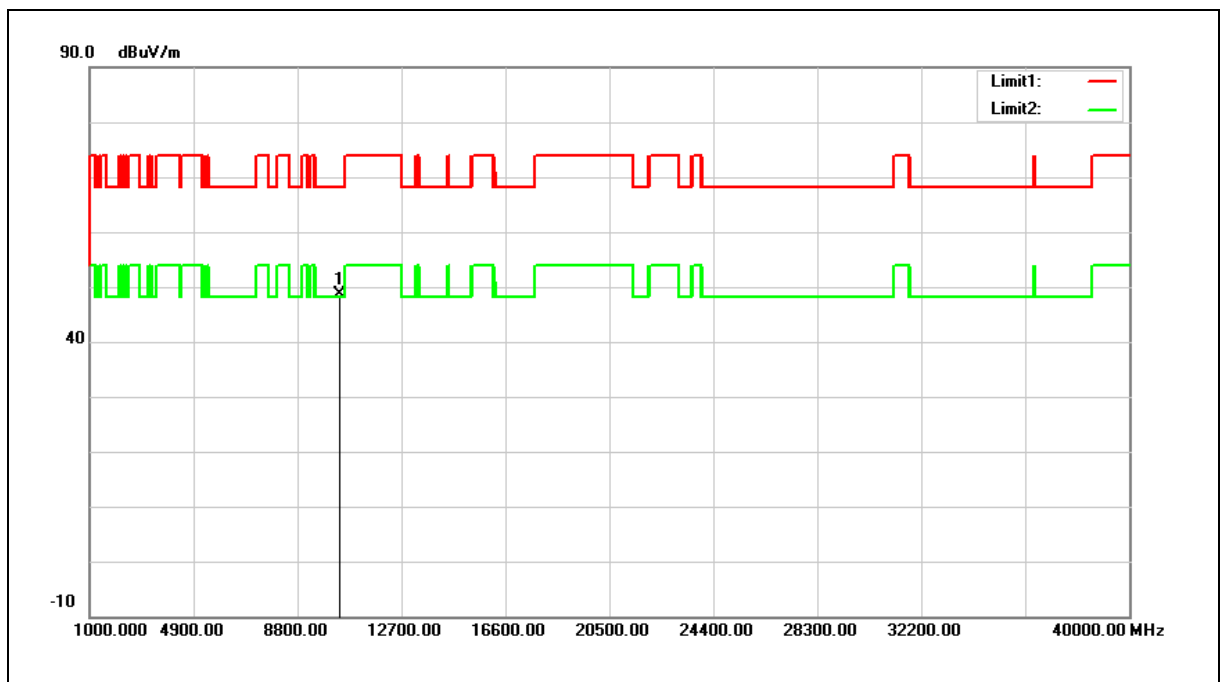


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.71	16.99	48.70	68.20	-19.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

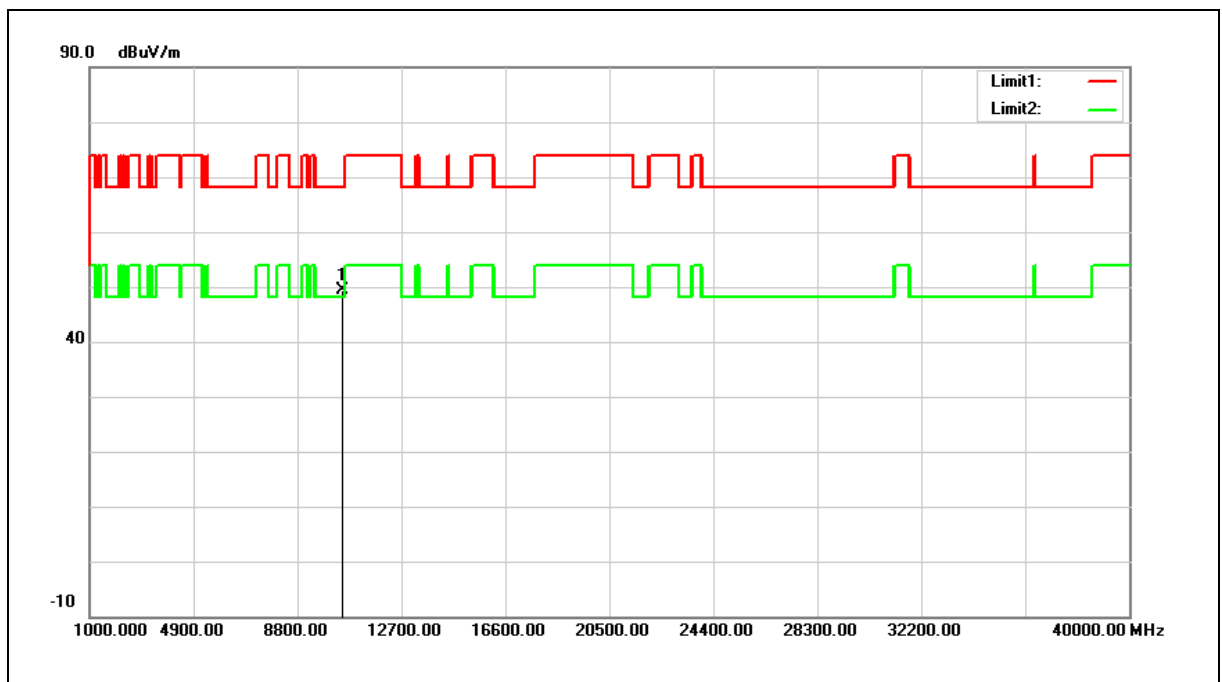


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	32.26	17.23	49.49	68.20	-18.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

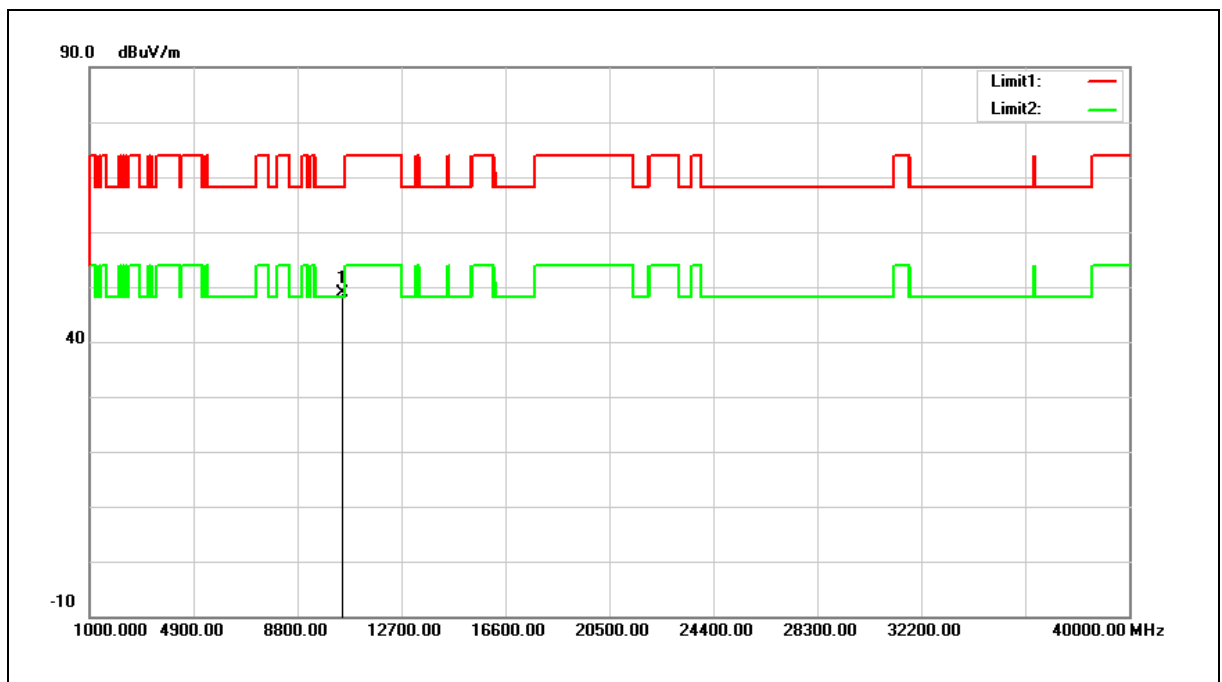


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.75	17.23	48.98	68.20	-19.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

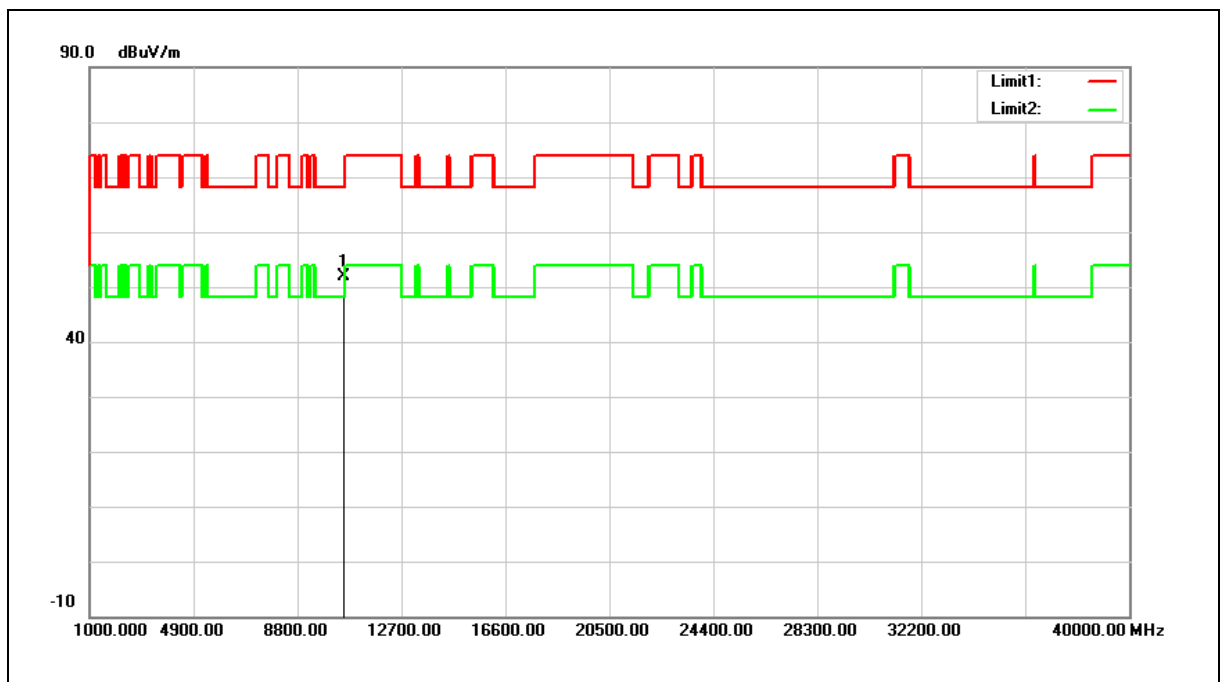


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.47	17.35	51.82	68.20	-16.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

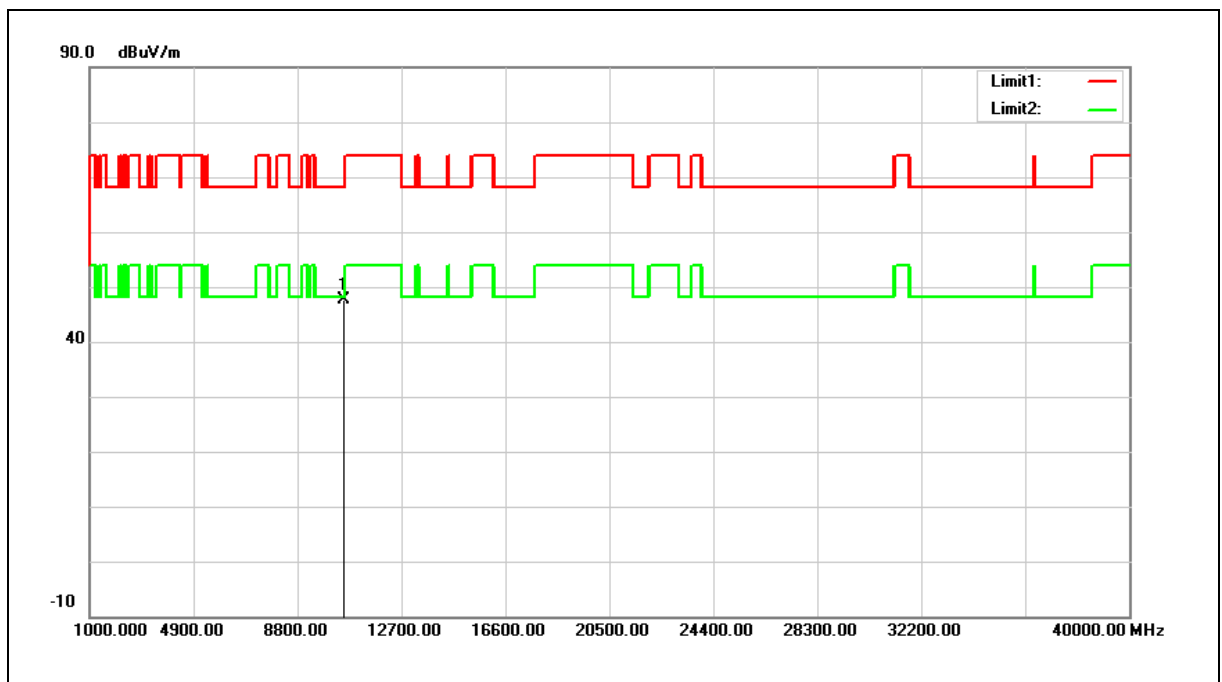


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	30.40	17.35	47.75	68.20	-20.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

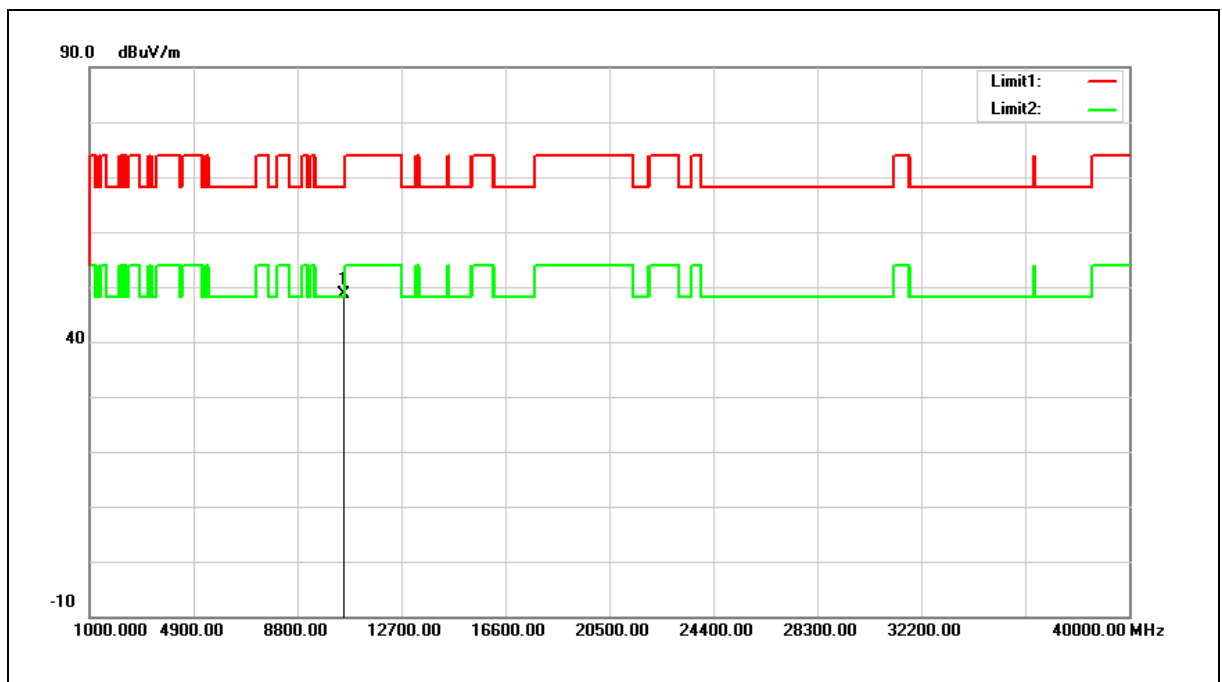


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.28	17.46	48.74	68.20	-19.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

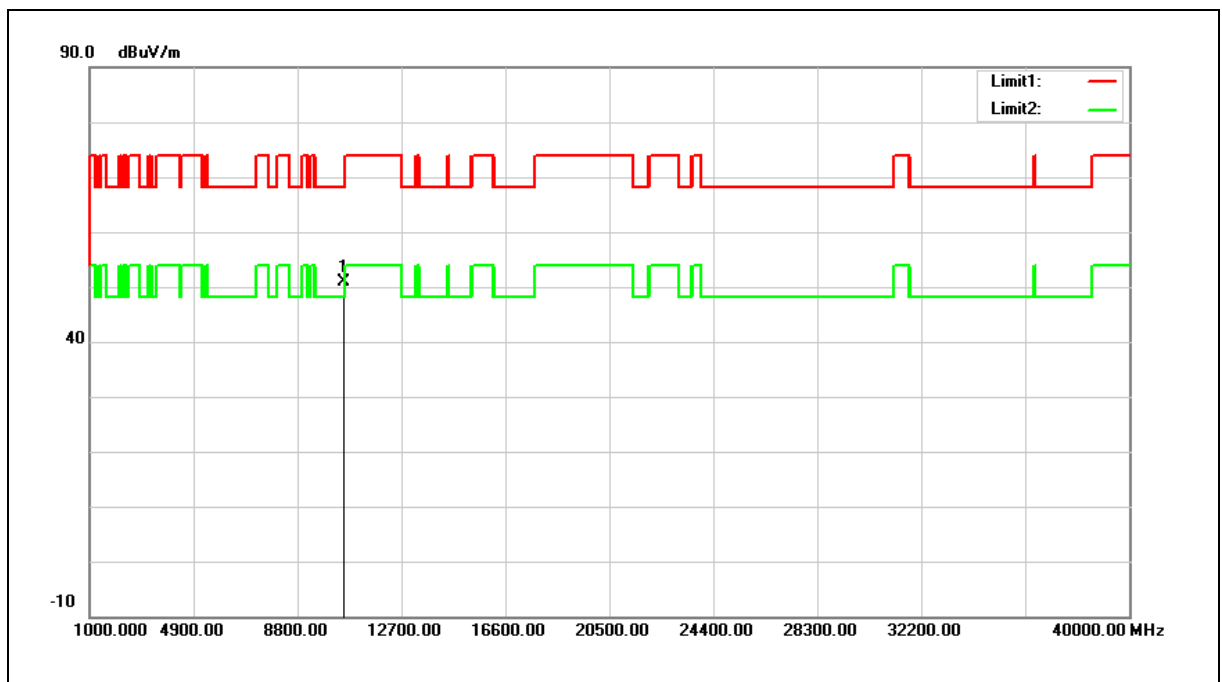


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.46	17.46	50.92	68.20	-17.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

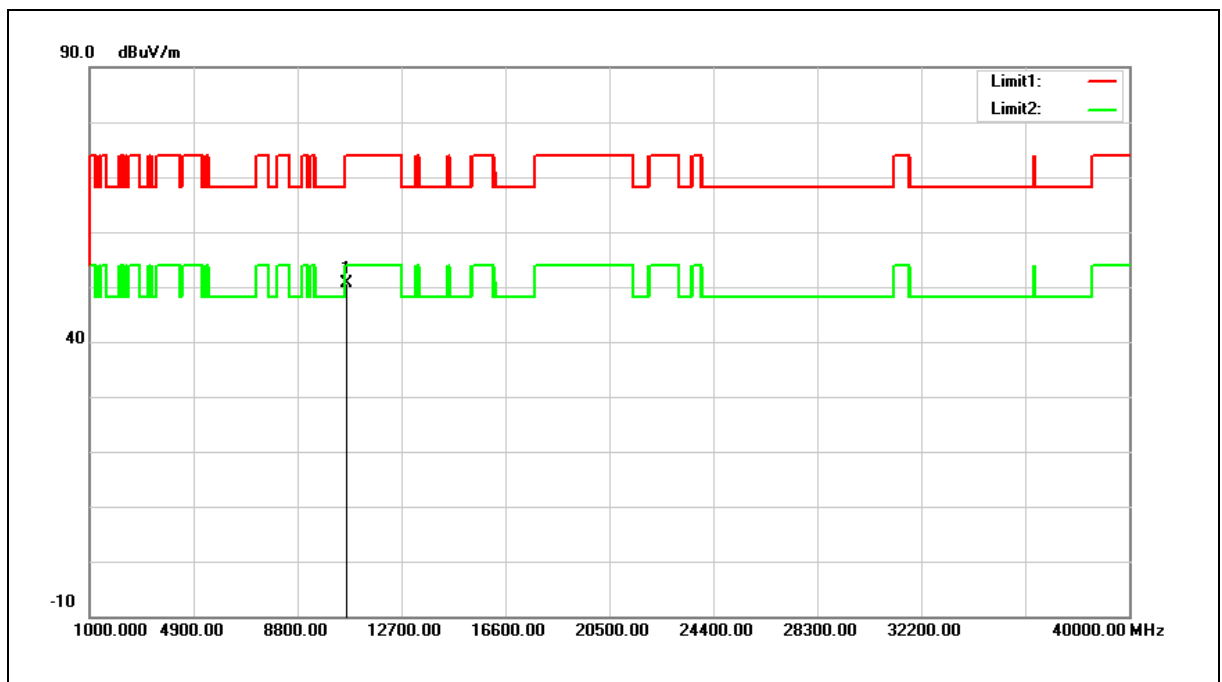


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.90	17.70	50.60	74.00	-23.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

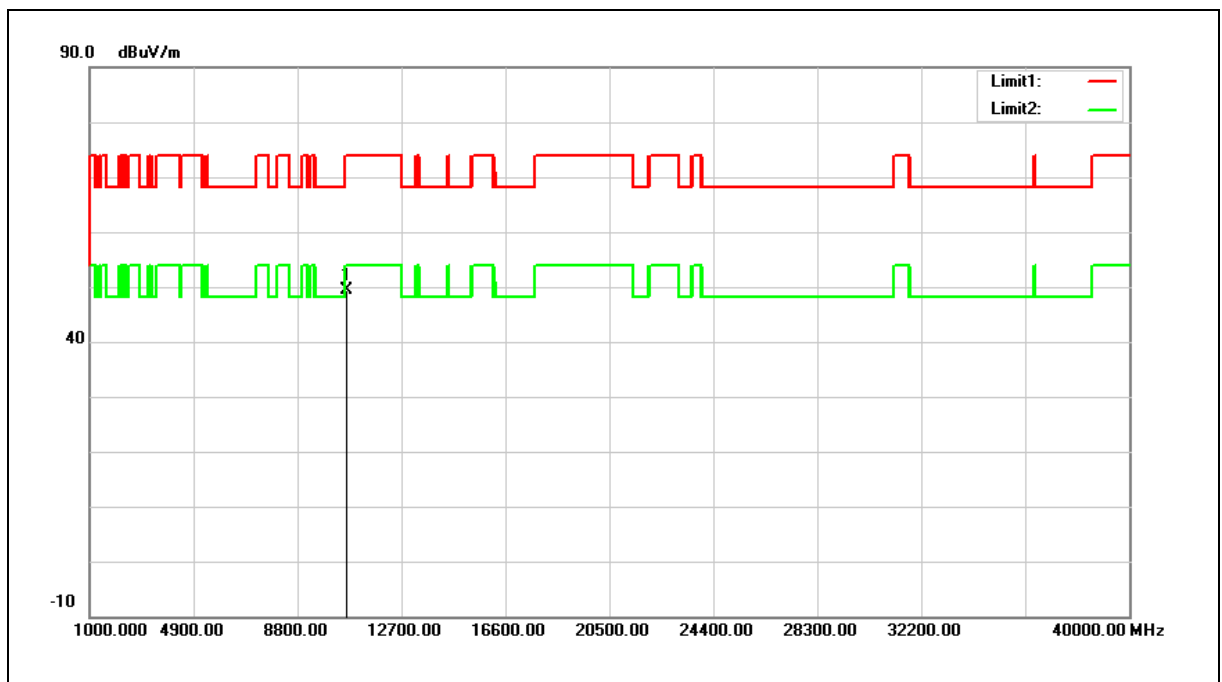


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.66	17.70	49.36	74.00	-24.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

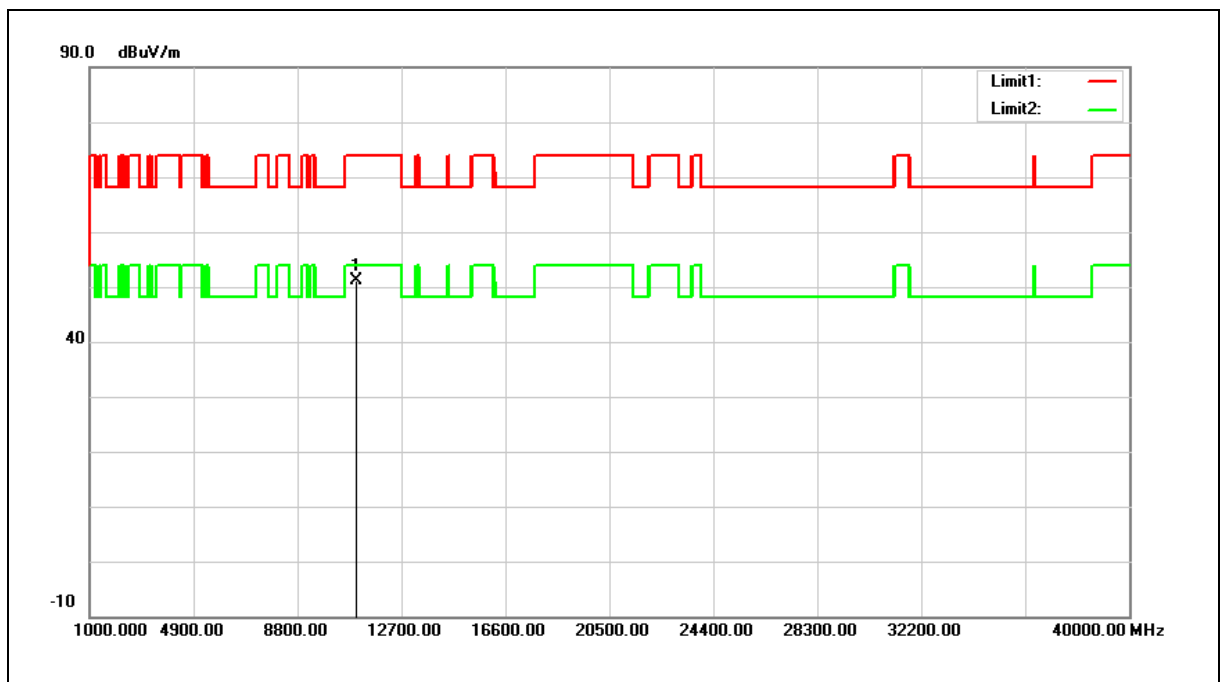


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.37	18.74	51.11	74.00	-22.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

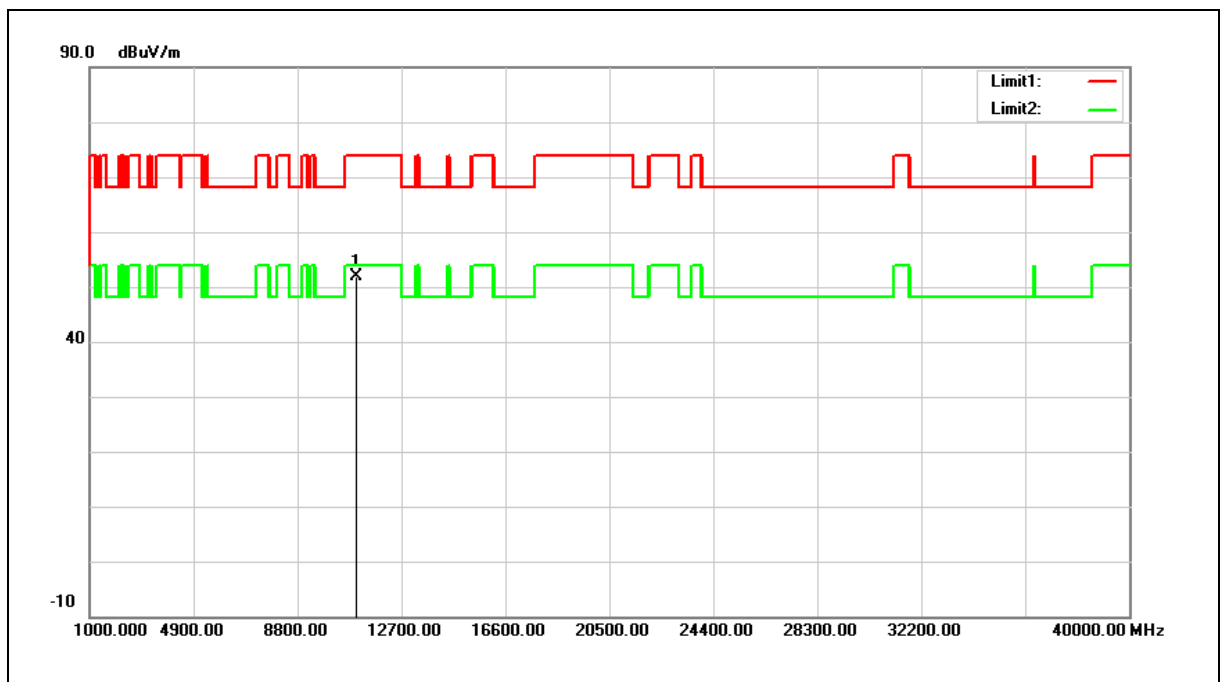


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.13	18.74	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

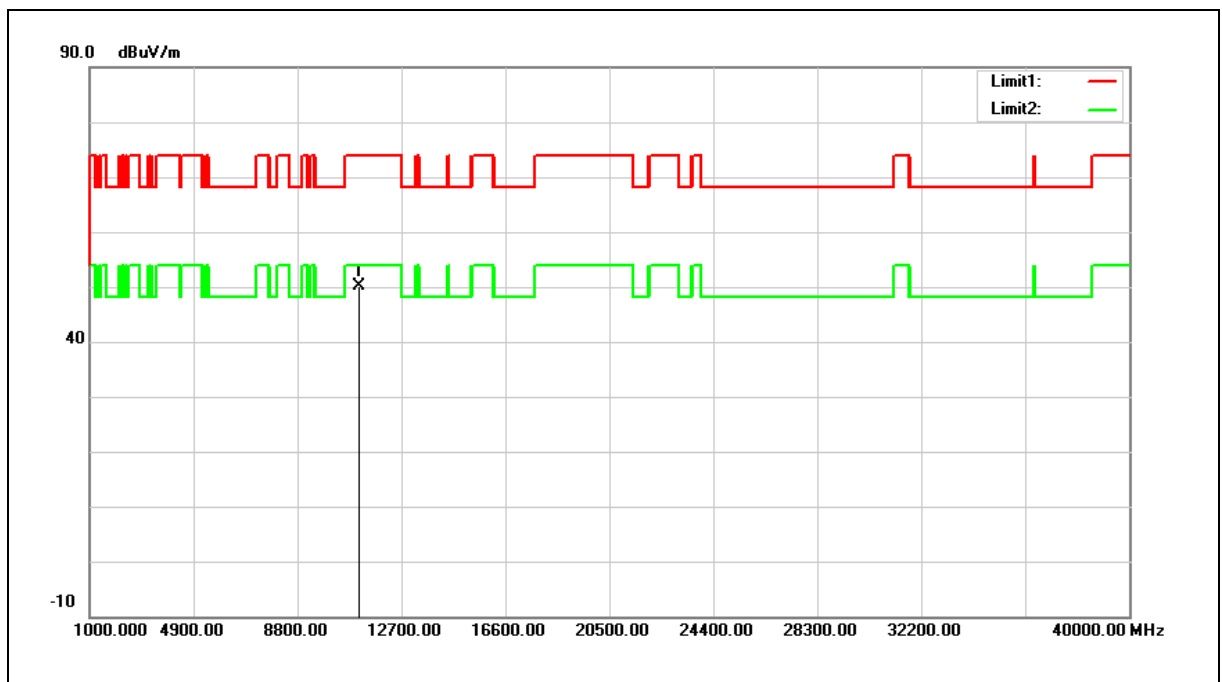


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	31.21	18.82	50.03	74.00	-23.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

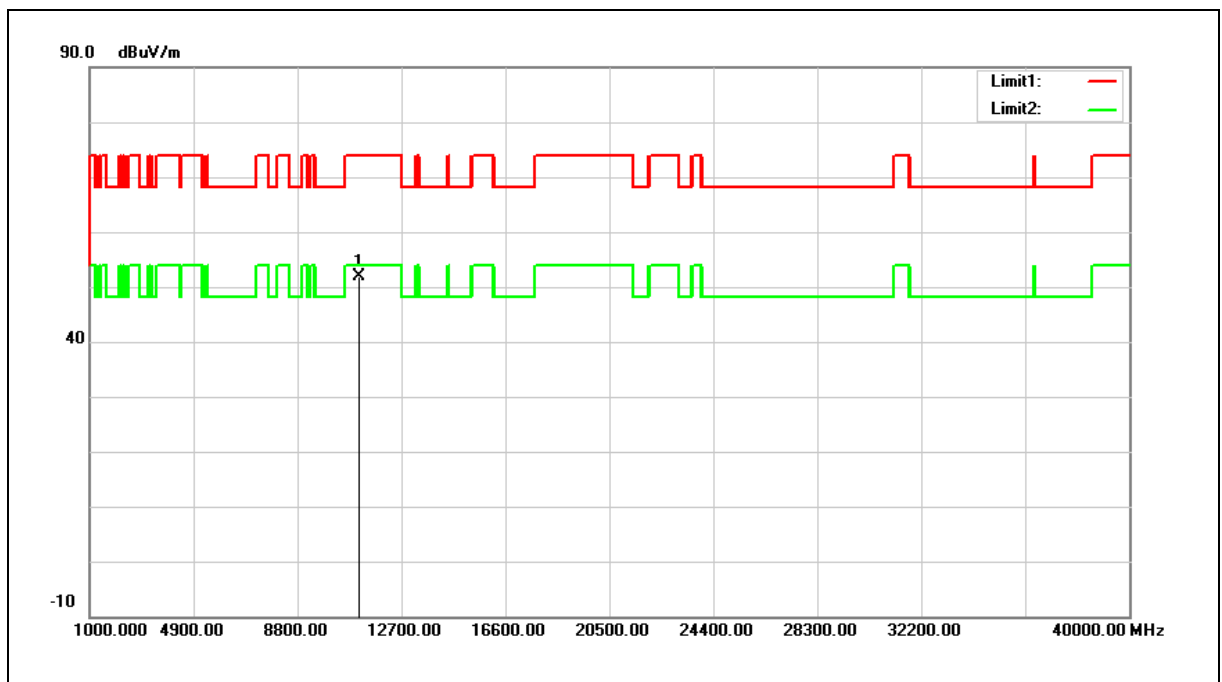


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.03	18.82	51.85	74.00	-22.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

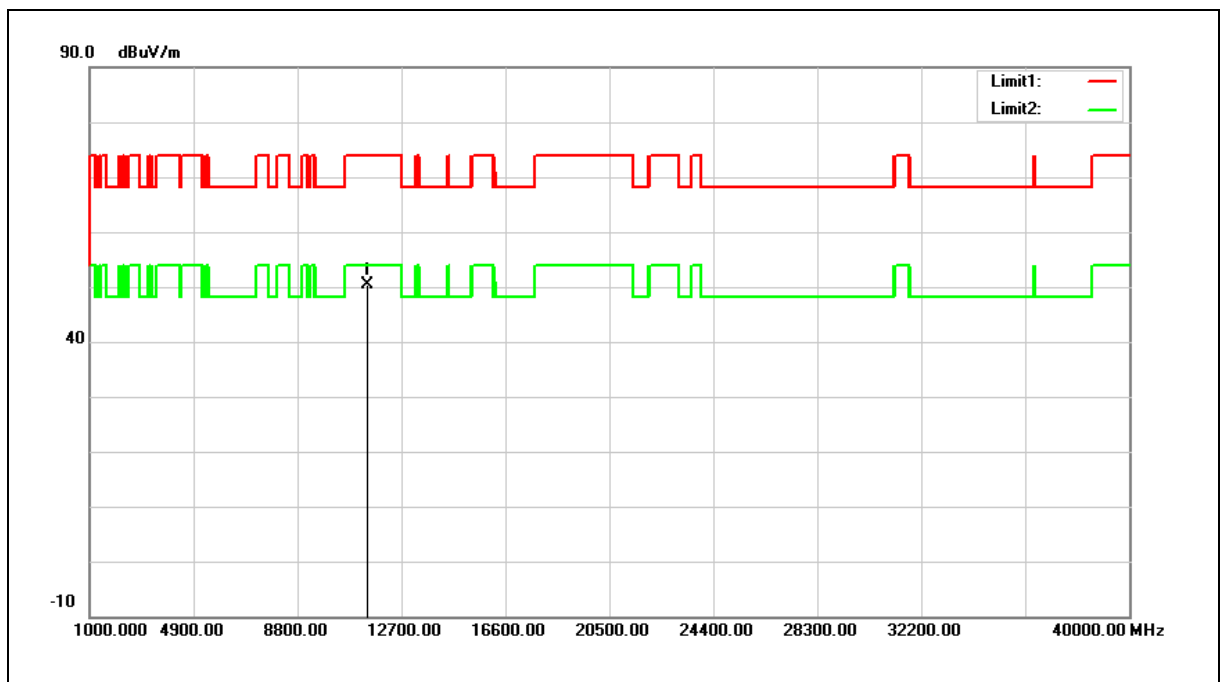


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.27	19.01	50.28	74.00	-23.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

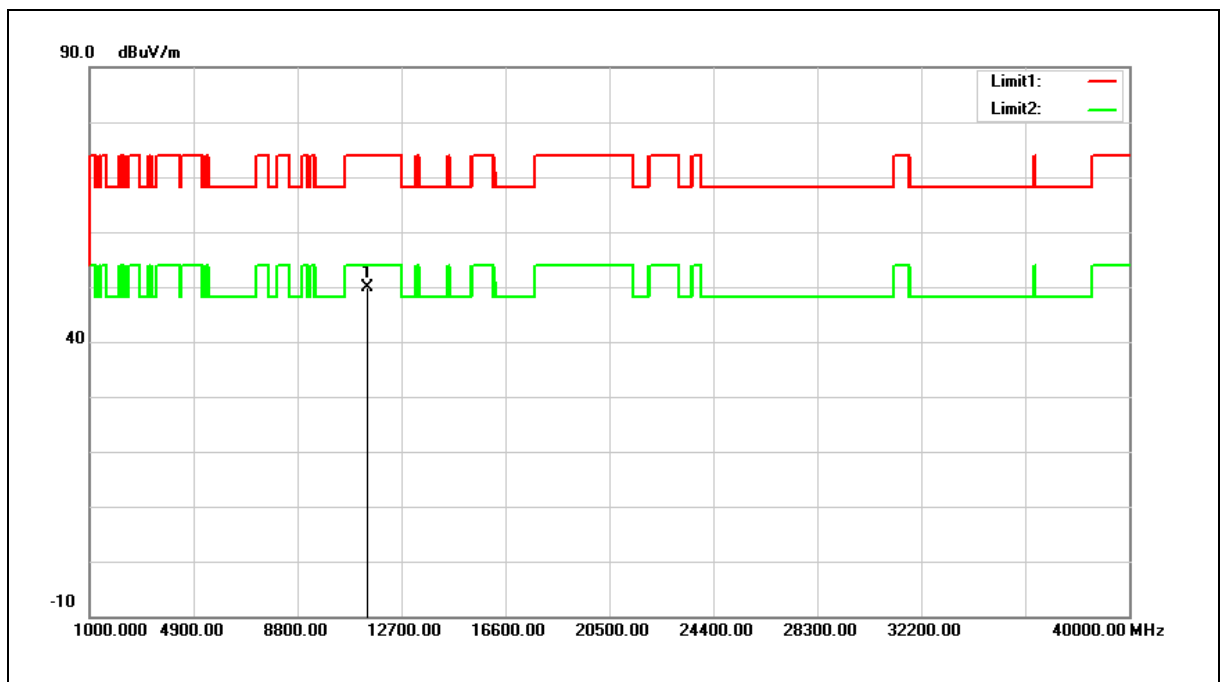


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	30.92	19.01	49.93	74.00	-24.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

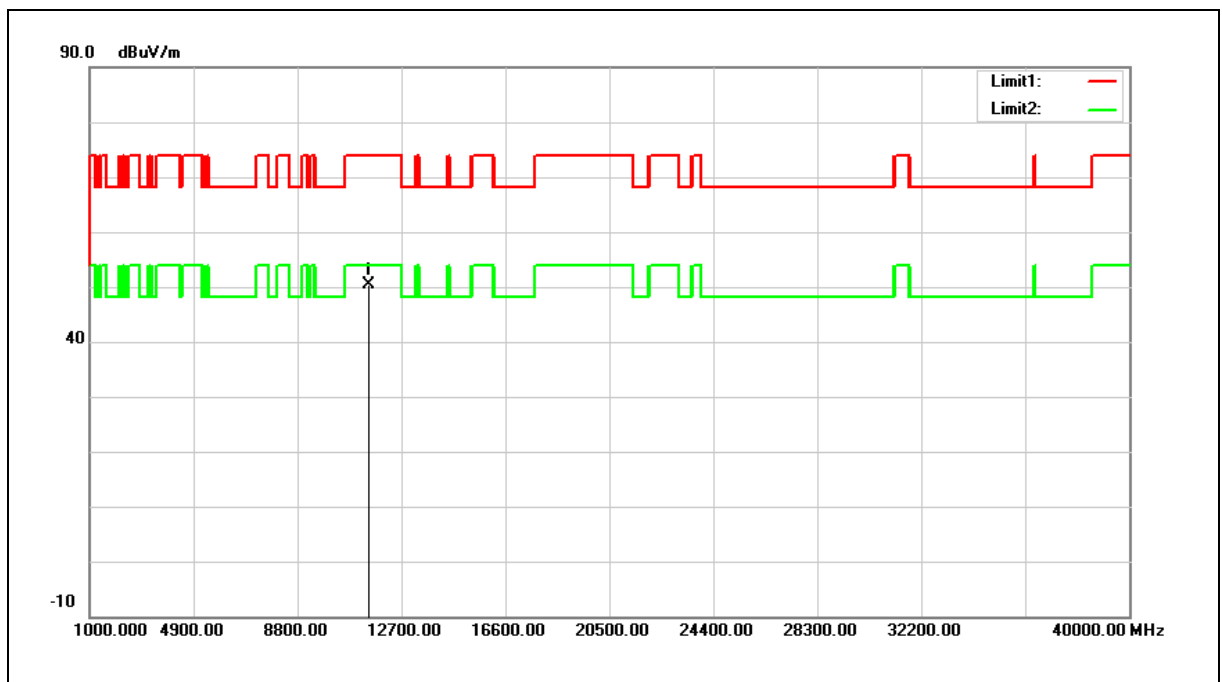


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.39	19.07	50.46	74.00	-23.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

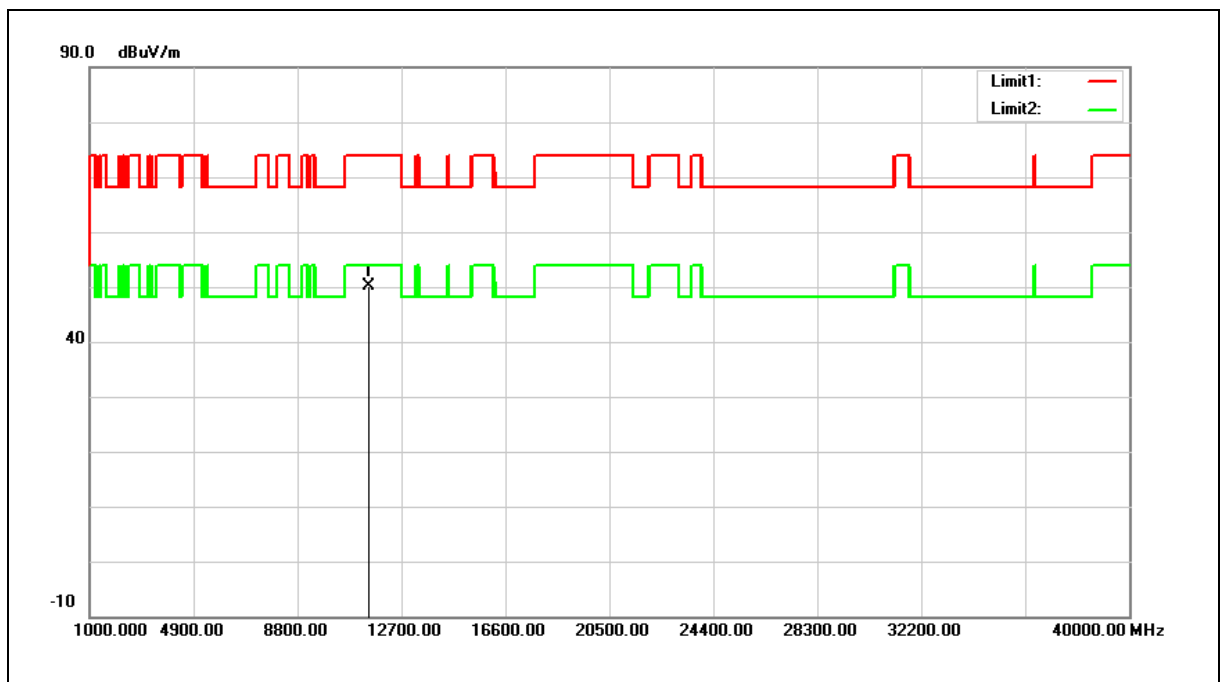


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.96	19.07	50.03	74.00	-23.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

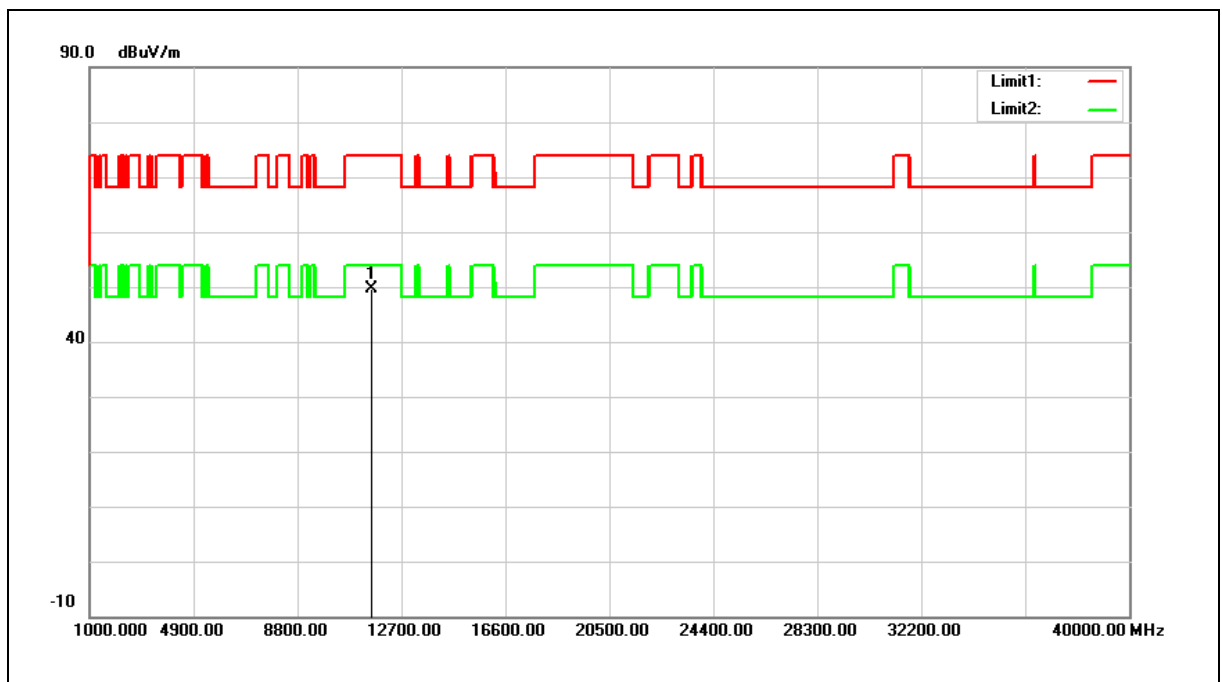


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.63	18.98	49.61	74.00	-24.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

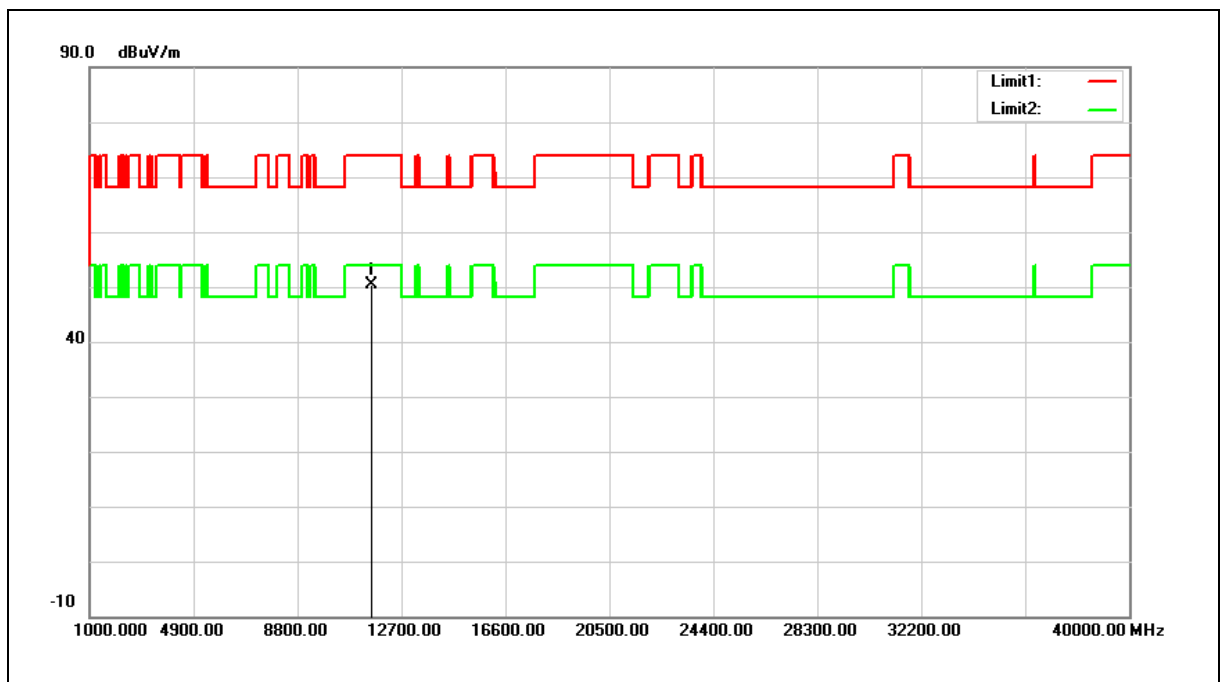


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.35	18.98	50.33	74.00	-23.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

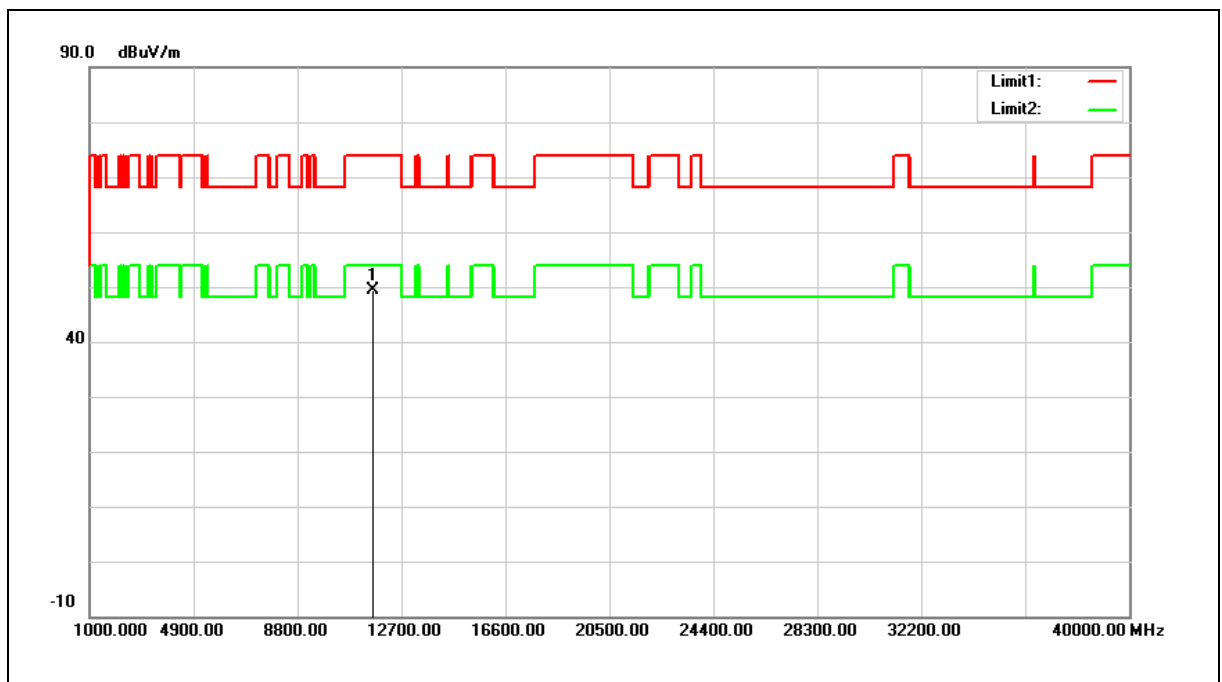


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.56	18.87	49.43	74.00	-24.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

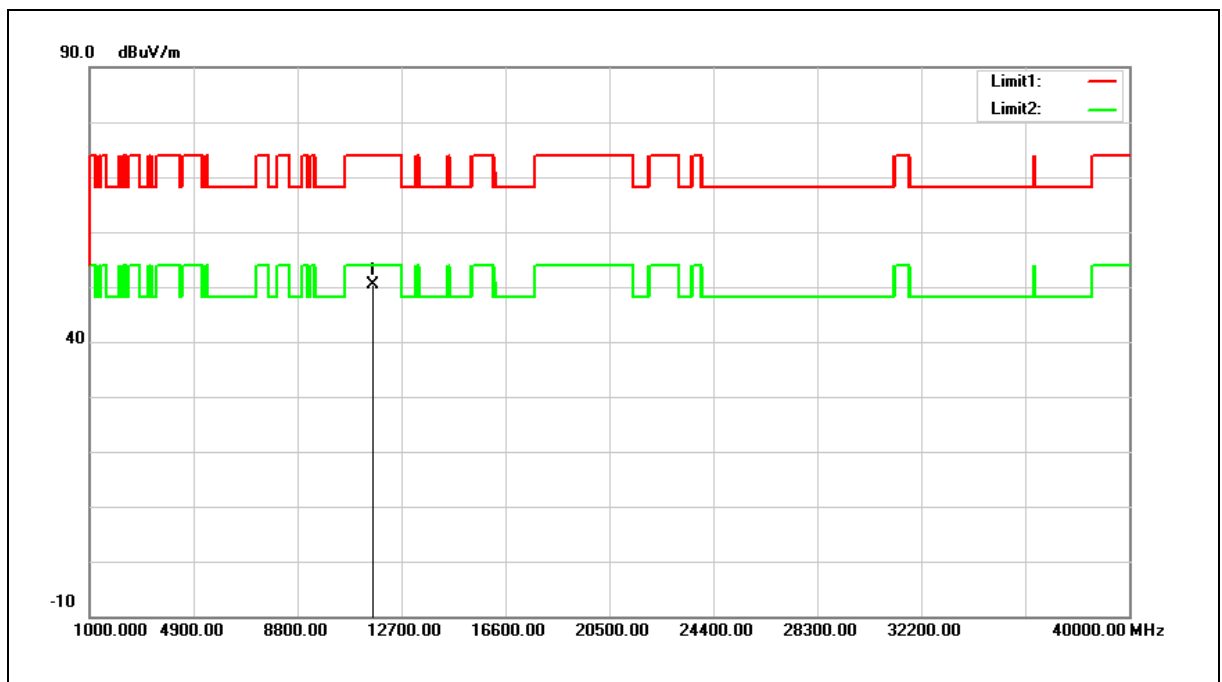


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.63	18.87	50.50	74.00	-23.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

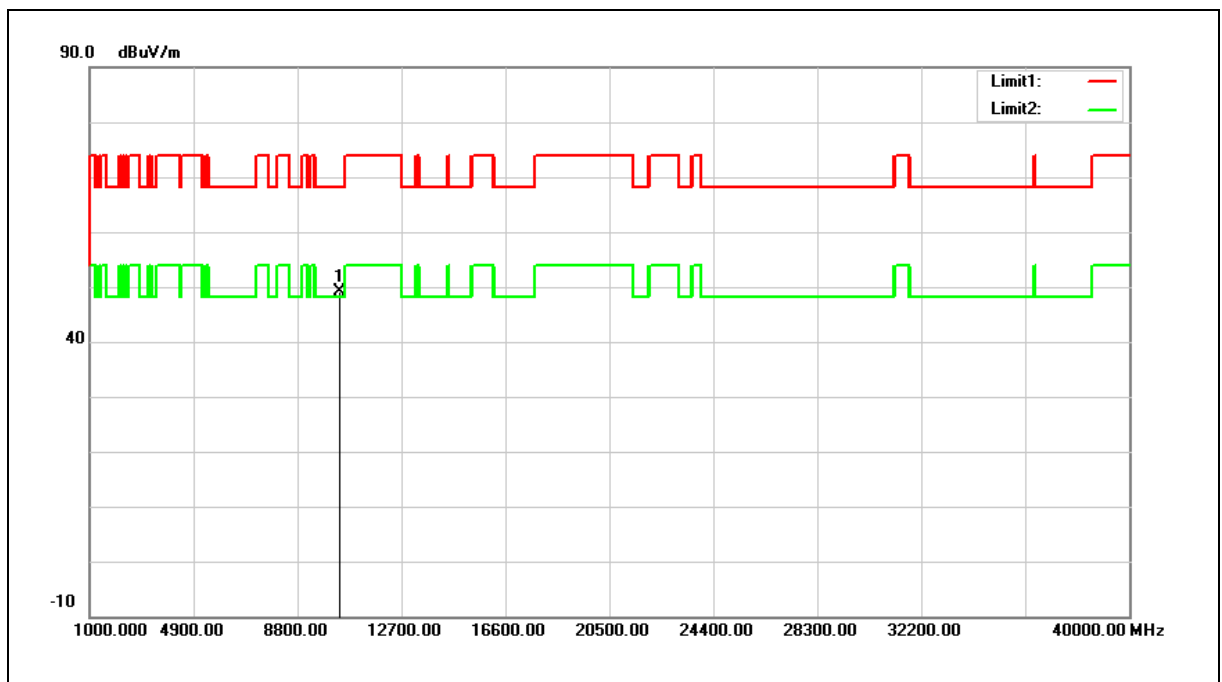


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	32.17	16.92	49.09	68.20	-19.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic	Power:	DC 4V
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

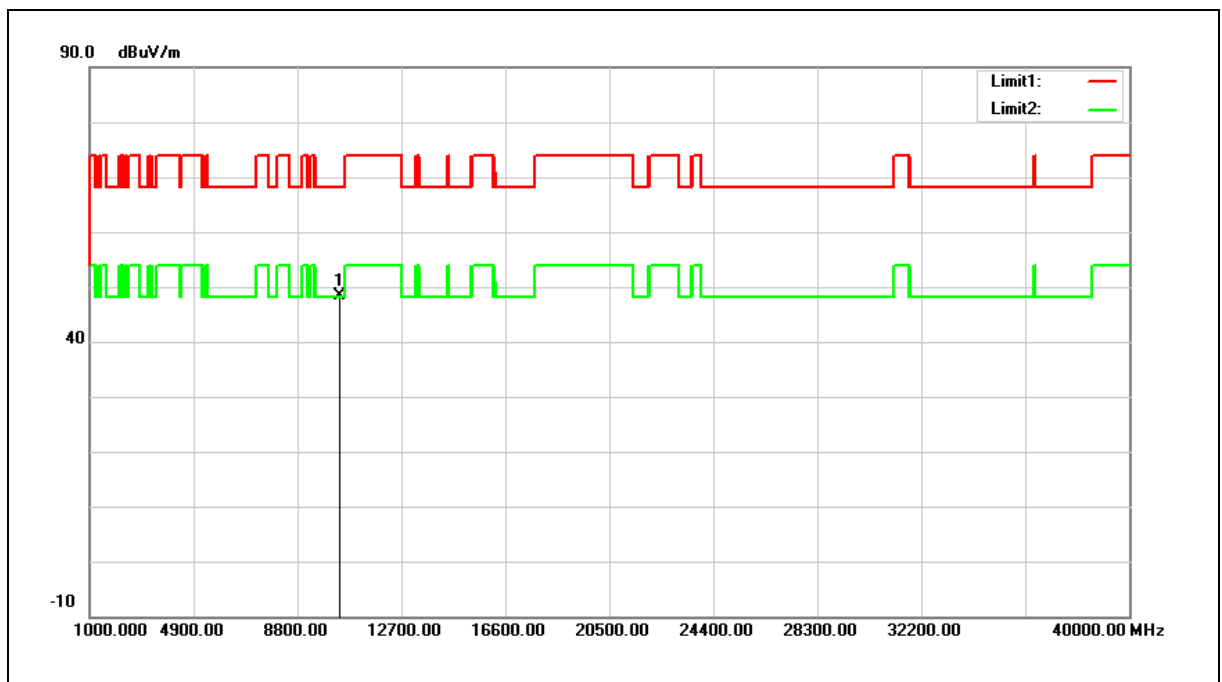

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.53	16.92	48.45	68.20	-19.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.