

Japan Radio Test Report

Project No. : 2511C431
Equipment : BE5000 Ceiling Mount Wi-Fi 7 Access Point
Brand Name : tp-link
Model Name : EAP727
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Factory : Lianzhou International Co., Ltd. Guangming Branch
Address : Room -101, 1F-8F, C901, C1001, C1101, C1201, No.198, Kelian Road, Yutang Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, P.R.China
Date of Receipt : Dec. 02, 2025
Date of Test : Dec. 16, 2025 ~ Jan. 30, 2026
Issued Date : May 22, 2026
Test Sample : Engineering Sample No.: DG920251215111 for Carrier Sense Capability, DG920251202222 for others.
Standard(s) : Ordinance Regulating Radio Equipment General Provisions, Transmitting Equipment, Receiving Equipment, Article 49-20
Test Procedure : Test Method Specified Radio Equipment Article 2 Paragraph 1 of item19 (MIC Notice No.88 Appendix No.43)

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by :

Sheldon Ou

Approved by :

Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective. Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents

page

REVISION HISTORY	4
1. SUMMARY OF TEST RESULTS	5
1.1. TEST FACILITY	6
1.2. MEASUREMENT UNCERTAINTY	6
1.3. TEST ENVIRONMENT CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. DESCRIPTION OF TEST MODES	9
2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4. DESCRIPTION OF SUPPORT UNITS	11
2.5. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	12
3. TEST RESULTS	13
3.1. FREQUENCY TOLERANCE MEASUREMENT	13
3.2. OCCUPIED BANDWIDTH MEASUREMENT	14
3.3. UNWANTED EMISSION INTENSITY MEASUREMENT	15
3.4. ANTENNA POWER TOLERANCE MEASUREMENT	17
3.5. LIMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT	19
3.6. TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT	21
3.7. TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT	23
3.8. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT	25
3.9. CARRIER SENSE CAPABILITY MEASUREMENT	27
3.10. CONSTRUCTION PROTECTION CONFIRMATION METHOD	29
4. LIST OF MEASURING EQUIPMENTS	30
5. EUT TEST PHOTO	32
APPENDIX A - FREQUENCY TOLERANCE	33
APPENDIX B - OCCUPIED BANDWIDTH	38
APPENDIX C - UNWANTED EMISSION INTENSITY	43
APPENDIX D - ANTENNA POWER TOLERANCE AND EIRP ANTENNA POWER	68
APPENDIX E - LIMITATION OF COLLATERAL EMISSION OF RECEIVER	77

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-JPAP-2-2511C431	R00	Original Report.	May 15, 2026	Invalid
BTL-JPAP-2-2511C431	R01	This report updated the confirmation method in chapter 3.10.2 and list of measuring equipments in chapter 4. It is a revision of the report BTL-JPAP-2-2511C431 R00. This is a newly released report, replacing the BTL-JPAP-2-2511C431 R00 report.	May 22, 2026	Valid

1. SUMMARY OF TEST RESULTS

Part	Description of Test	Rule Section	Result
3.1	Frequency Tolerance	Article 5, Annex 1	Pass
3.2	Occupied Bandwidth (99%)	Article 6, Annex 2	Pass
3.3	Unwanted Emission Intensity	Article 7, Annex 3	Pass
3.4	Antenna Power Tolerance	Article 14	Pass
3.5	Limitation of Collateral Emission of Receiver	Article 24, Paragraph 2	Pass
3.6	Transmission Antenna Gain (EIRP Antenna Power)	Article 49-20	Pass
3.7	Transmission Radiation Angle Width (3dB Beamwidth)	Article 49-20	N/A
3.8	Radio Interference Prevention Capability	Article 9-4, Item 5 Article 6-2, Item 3 and 5 of the Regulation for Enforcement of the Radio Law	Pass
3.9	Carrier Sense Capability	Article 49-20	Pass
3.10	Construction Protection Confirmation	Article 49-20	Pass

Method of measurement:	MIC Notice No.88 Appendix No.43
Test condition:	Conductive, RF test program provided by the customer was used to control the operating channel as well as the output power level.

Abbreviations used in this test report are as follows:

NC:	Normal Condition
EC:	Extreme Condition
EUT:	Equipment Under Test
DS:	Direct spreading
FH:	Frequency hopping
OFDM:	Orthogonal frequency division multiplexing

1.1. TEST FACILITY

The test facilities used to collect the test data in this report:

DGDLR08-1 / DGDLR09-3: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

1.2. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Frequency Tolerance	1.4 ppm	Confidence levels of 95.45%
99% Bandwidth	0.75 %	Confidence levels of 95.45%
Antenna Power	1.3 dB	Confidence levels of 95.45%
TX-RX Emission	2.1 dB	Confidence levels of 95.45%

1.3. TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Frequency Tolerance	22°C	47%	AC 100V/60Hz	Arvin Tong
Occupied Bandwidth (99%)	22°C	47%	AC 100V/60Hz	Arvin Tong
Unwanted Emission Intensity	22°C	47%	AC 100V/60Hz	Arvin Tong
Antenna Power Tolerance	23°C	50%	AC 100V/60Hz	Arvin Tong
Limitation of Collateral Emission of Receiver	22°C	47%	AC 100V/60Hz	Arvin Tong
Carrier Sense Capability	24°C	48%	AC 100V/60Hz	Bowen Li

2. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Equipment	BE5000 Ceiling Mount Wi-Fi 7 Access Point
Brand Name	tp-link
Test Model	EAP727
Model Name	EAP727
Model Difference(s)	N/A
Hardware Version	1.0
Software Version	1.0
Power Source	DC Voltage supplied from AC adapter (support unit) or PoE adapter (support unit).
Power Rating	12V --- 1.5A 802.3at PoE: 42.5-57V --- 0.6A
Operation Frequency	2412 MHz ~ 2472 MHz
Modulation Technology	IEEE 802.11b:DSSS IEEE 802.11g/n:OFDM IEEE 802.11ax/be:OFDMA
Numbers of subcarriers of OFDM	3/MHz
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps IEEE 802.11be: up to 688 Mbps
Occupied Bandwidth	37.60 MHz
Antenna Power (Rated Power)	IEEE 802.11b: 7.26 mW/MHz IEEE 802.11g: 6.82 mW/MHz IEEE 802.11n(HT20): 7.10 mW/MHz IEEE 802.11n(HT40): 3.71 mW/MHz IEEE 802.11ax(HE20): 7.09 mW/MHz IEEE 802.11ax(HE40): 3.52 mW/MHz IEEE 802.11be(EHT20): 6.71 mW/MHz IEEE 802.11be(EHT40): 3.56 mW/MHz
Antenna Power (Max. Conducted Power)	IEEE 802.11b: 7.2611 mW/MHz IEEE 802.11g: 6.8234 mW/MHz IEEE 802.11n(HT20): 7.0958 mW/MHz IEEE 802.11n(HT40): 3.7145 mW/MHz IEEE 802.11ax(HE20): 7.0941 mW/MHz IEEE 802.11ax(HE40): 3.5213 mW/MHz IEEE 802.11be(EHT20): 6.7143 mW/MHz IEEE 802.11be(EHT40): 3.5563 mW/MHz

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH13 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)					
CH03 - CH11 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	06	2437	11	2462
02	2417	07	2442	12	2467
03	2422	08	2447	13	2472
04	2427	09	2452		
05	2432	10	2457		

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain(dBi)
1	TP-Link Systems Inc.	EAP727-ANT1	Dipole	N/A	3.38
2	TP-Link Systems Inc.	EAP727-ANT2	Dipole	N/A	3

Note:

- 1) The EUT incorporates a CDD function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
- 2) Both Ant.1 and Ant.2 had been pre-tested and found the Ant.1 power is the highest and worst, so only the data of Ant.1 with offset 3dB had been recorded.
- 3) The antenna gain is provided by the manufacturer.

4. Table for Antenna Configuration:

Operating Mode	TX Mode
IEEE 802.11b	V (Ant. 1 + Ant. 2)
IEEE 802.11g	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)	V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)	V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)	V (Ant. 1 + Ant. 2)

2.2. DESCRIPTION OF TEST MODES

The EUT was tested while in a continuous transmitter / receiver mode.

The EUT was tuned to a low, middle and high channel for all tests.

The EUT continuously transmitted a modulated packet with payload, while transmitting the EUT was setup to operate at the intended maximum power output available to the end user.


For all test case pre/scans were completed in all modes to determine worst case levels.

Test Mode	Description
Mode 1	IEEE 802.11b/CH01,CH07,CH13
Mode 2	IEEE 802.11g/CH01,CH07,CH13
Mode 3	IEEE 802.11n(HT20)/CH01,CH07,CH13
Mode 4	IEEE 802.11n(HT40)/CH03,CH07,CH11
Mode 5	IEEE 802.11ax(HE20)/CH01,CH07,CH13
Mode 6	IEEE 802.11ax(HE40)/CH03,CH07,CH11
Mode 7	IEEE 802.11be(EHT20)/CH01,CH07,CH13
Mode 8	IEEE 802.11be(EHT40)/CH03,CH07,CH11

Note:

- 1) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.

Power Supply Voltage Fluctuation Test

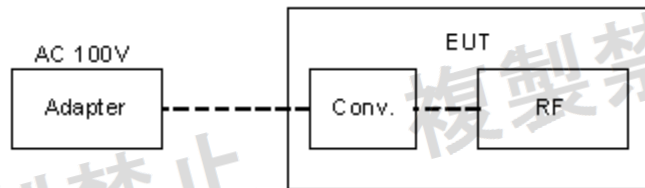

Voltage Fluctuation Test	Normal Voltage	High Voltage + 10% of Normal Voltage	Low Voltage - 10% of Normal Voltage
Input: AC Power	100V	110V	90V
Output: DC Power	3.314V	3.314V	3.314V
Voltage Variation (%)	-	0	0

Measurement point




Note:

Voltage Variation (%)
= (Output High Voltage or Low Voltage - Output Normal Voltage) / Output Normal Voltage * 100

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/- 1%.
Exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.

The limit voltages of different external inputs have been measured, and the voltage fluctuations of the RF circuit do not exceed ±1%.

2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

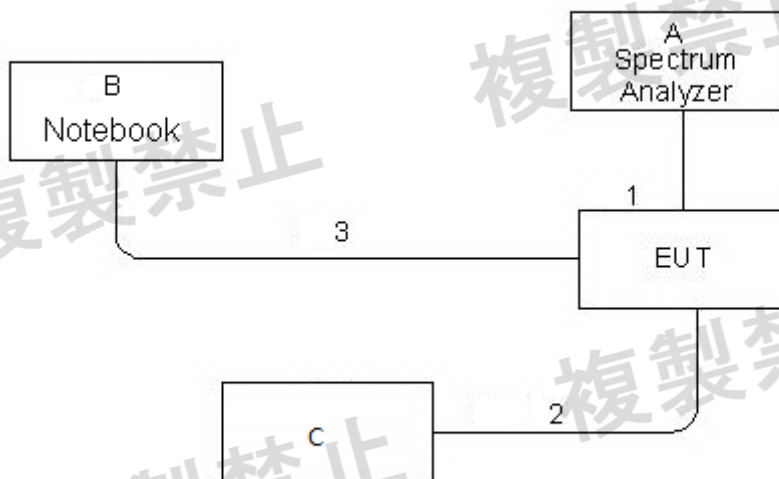

2.4. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Spectrum Analyzer	R&S	FSP40	100185
B	Notebook	Huawei	NbDE-WFH9	N/A
C	Power Supply	tp-link	T120330-2B4	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RF Cable	YES	NO	0.1m
2	DC Power Cable	YES	NO	1.2m
3	Control Cable	NO	NO	1.1m

2.5. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	QATool_20240327_External		
Frequency (MHz)	2412	2442	2472
IEEE 802.11b	13.5	13.5	14
IEEE 802.11g	15.5	15.5	15.5
IEEE 802.11n(HT20)	16.5	16	16
IEEE 802.11ax(HE20)	16.5	16.5	16
IEEE 802.11be(EHT20)	16.5	16.5	16.5
Frequency (MHz)	2422	2442	2462
IEEE 802.11n(HT40)	15.5	16	16
IEEE 802.11ax(HE40)	16	16	16
IEEE 802.11be(EHT40)	16	16	16

3. TEST RESULTS

3.1. FREQUENCY TOLERANCE MEASUREMENT

3.1.1. LIMIT

Item	Limits (See Article 5 and Annex 1 table 7-8 of the Ordinance Regulating Radio Equipment)
Frequency Tolerance	-50≤ppm≤50

3.1.2. SETTING

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Span	200kHz
RBW / VBW	10kHz / 10kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.1.3. TEST PROCEDURES

Test method according to Clause 3 of Annex No.43 of MIC Notification No.88.

1. Frequency accuracy of SA shall be less than 10% of limits tolerance (5ppm).
2. Set spectrum analyzer with condition in section 3.1.2 and tune reference level to observe receiving signal position.
3. Center Frequency: The center frequency of testing for EUT.
4. EUT have transmitted absence of modulation signal and fixed channelize. f is using the mark cursor to mark the peak frequency value, f_c is declaring of channel frequency.

Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 50 ppm.

3.1.4. TEST SETUP LAYOUT



3.1.5. TEST DEVIATION

There is no deviation with the original standard.

3.1.6. EUT OPERATION DURING TEST

The EUT was programmed to be in un-modulation mode.

3.1.7. TEST RESULTS

Please refer to the Appendix A.

3.2. OCCUPIED BANDWIDTH MEASUREMENT

3.2.1. LIMIT

Item	Limits (See Article 6 and Annex 2 30 of the Ordinance Regulating Radio Equipment)
Occupied Bandwidth	DSSS and OFDM (20MHz systems)≤26MHz; OFDM (40MHz systems)≤40MHz

3.2.2. SETTING

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Span	20MHz systems: 60MHz 40MHz systems: 100MHz
RBW / VBW	300kHz / 300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3. TEST PROCEDURES

Test method according to Clause 4 of Annex No.43 of MIC Notification No.88.

1. Set spectrum analyzer with condition in section 3.2.2 and tune reference level to observe receiving signal position.
2. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz (For DSSS or OFDM 20MHz systems) or 40MHz(For OFDM 40MHz systems).

3.2.4. TEST SETUP LAYOUT



3.2.5. TEST DEVIATION

There is no deviation with the original standard.

3.2.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.2.7. TEST RESULTS

Please refer to the Appendix B.

3.3. UNWANTED EMISSION INTENSITY MEASUREMENT

3.3.1. LIMIT

Item	Limits
	(See Article 7 and Annex 3 26 of the Ordinance Regulating Radio Equipment)
TX	$\leq 2.5 \mu\text{W}/\text{MHz}$ ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
Spurious	$\leq 2.5 \mu\text{W}/\text{MHz}$ ($1000\text{MHz} \leq f < 2387\text{MHz}$; $2496.5\text{MHz} < f$)
Emission	$\leq 25 \mu\text{W}/\text{MHz}$ ($2387\text{MHz} \leq f < 2400\text{MHz}$) and ($2483.5\text{MHz} < f \leq 2496.5\text{MHz}$)
Measurement range: 30MHz~5th harmonics	

3.3.2. SETTING

The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
RBW / VBW	100kHz / 100kHz (30~1000MHz) 1 MHz / 1 MHz (Above 1000MHz)
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. TEST PROCEDURES

Test method according to Clause 5 of Annex No.43 of MIC Notification No.88.

- EUT have transmitted the maximum modulation signal and fixed channelize.
- Set spectrum analyzer with condition in section 3.3.2 and tune reference level to observe receiving signal position.
- SA adjusted to start frequency 30MHz and stop frequency 1000MHz. Then to mark peak reading value + cable loss shall be less than $2.5 \mu\text{W}/\text{MHz}$.
- SA adjusted to start frequency 1000MHz and stop frequency 2387MHz. Then to mark peak reading value + cable loss shall be less than $2.5 \mu\text{W}/\text{MHz}$.
- SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than $25 \mu\text{W}/\text{MHz}$.
- SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz. Then to mark peak reading value + cable loss shall be less than $25 \mu\text{W}/\text{MHz}$.
- SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz. Then to mark peak reading value + cable loss shall be less than $2.5 \mu\text{W}/\text{MHz}$.
- If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like time domain power measurement as Result_Value.

3.3.4. TEST SETUP LAYOUT



3.3.5. TEST DEVIATION

There is no deviation with the original standard.

3.3.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

Note:

- ※ 1: Frequency Band 1 ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
- ※ 2: Frequency Band 2 ($1000\text{MHz} \leq f < 2387\text{MHz}$)
- ※ 3: Frequency Band 3 ($2387\text{MHz} \leq f < 2400\text{MHz}$)
- ※ 4: Frequency Band 4 ($2483.5\text{MHz} < f \leq 2496.5\text{MHz}$)
- ※ 5: Frequency Band 5 ($2496.5\text{MHz} < f$)

Band	1	2	3	4	5
Cable Loss(dB)	15.99	15.99	15.99	15.99	15.99

3.3.7. TEST RESULTS

Please refer to the Appendix C.

3.4. ANTENNA POWER TOLERANCE MEASUREMENT

3.4.1. LIMIT

Item	Limits (See Article 14 table 8 and Article 49-20 of the Ordinance Regulating Radio Equipment)	
	DSSS and OFDM (20MHz systems)	OFDM (40MHz systems)
Modulation Technology		
Antenna Power	10 mW/MHz or less	5 mW/MHz or less
EIRP	12.14 - 22.14 dBm/MHz or less	9.13 - 19.13 dBm/MHz or less
Antenna Power Tolerance	+20% (Base on manufacturer declare antenna power)	

3.4.2. SETTING

The following table is the setting of the spectrum analyzer.

Step 1:

Spectrum Parameter	Setting
Span	50MHz
RBW / VBW	1MHz / 3MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

Step 3:


Spectrum Parameter	Setting
Span	0Hz
RBW / VBW	1MHz / 1MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	60s

3.4.3. TEST PROCEDURES

Test method according to Clause 6 of Annex No.43 of MIC Notification No.88.

1. Set spectrum analyzer with condition in section 3.4.2 Step 1 and tune reference level to observe receiving signal position.
2. When the trace is complete, find the peak value of the power envelope and record the frequency.
3. Set spectrum analyzer with condition in section 3.4.2 Step 3 and tune reference level to observe receiving signal position.
4. Connect the high frequency power meter to the IF output terminal of the spectrum analyzer, measure the equivalent noise bandwidth at the resolution bandwidth of 1 MHz of the spectrum analyzer, correct the bandwidth to the 1 MHz equivalent bandwidth, and read the displayed value from the high frequency power meter.

3.4.4. TEST SETUP LAYOUT

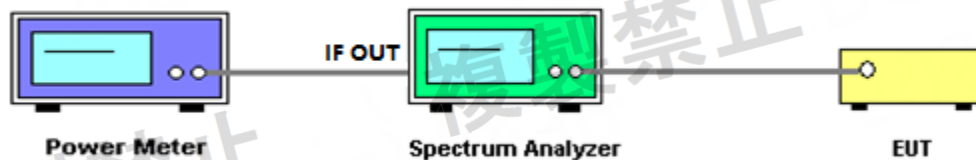

3.4.5. TEST DEVIATION

There is no deviation with the original standard.

3.4.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.4.7. TEST RESULTS

Please refer to the Appendix D.

3.5. LIMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT

3.5.1. LIMIT

Item	Limits (See Article 24, Paragraph 2 of the Ordinance Regulating Radio Equipment)
RX Spurious Emission	$\leq 4 \text{ nW}$ (-54 dBm) ($f < 1\text{GHz}$)
	$\leq 20 \text{ nW}$ (-47 dBm) ($1\text{GHz} \leq f$)
Measurement range: 30MHz~5th harmonics	

3.5.2. SETTING

The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
RBW / VBW	100kHz / 100kHz (30~1000MHz)
	1 MHz / 1 MHz (Above 1000MHz)
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

3.5.3. TEST PROCEDURES

Test method according to Clause 7 of Annex No.43 of MIC Notification No.88.

1. EUT have the continuous reception mode and fixed only one channelize.
2. Set spectrum analyzer with condition in section 3.5.2 and tune reference level to observe receiving signal position.
3. SA set RBW: 100kHz and VBW: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW.
4. SA set RBW: 1MHz and VBW: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW.

3.5.4. TEST SETUP LAYOUT



3.5.5. TEST DEVIATION

There is no deviation with the original standard.

3.5.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously receiving mode.

Note:

- ※ 6: Frequency Band 6 ($f < 1\text{GHz}$)
- ※ 7: Frequency Band 7 ($1\text{GHz} \leq f$)

Band	6	7
Cable Loss(dB)	1.49	1.49

3.5.7. TEST RESULTS

Please refer to the Appendix E.

3.6. TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT

3.6.1. LIMIT

Item	Limits (See Article 49-20 of the Ordinance Regulating Radio Equipment)
Transmission Antenna Gain	12.14 dBi or less (When an E.I.R.P. is less than the limit, the shortage can be compensated for by the gain of the transmitting antenna.)

3.6.2. SETTING

The following table is the setting of spectrum analyzer.

Spectrum Analyzer	Setting
Span	0Hz
RBW / VBW	1MHz / 1MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

3.6.3. TEST PROCEDURES

Test method according to Clause 10 of Annex No.43 of MIC Notification No.88.


- Set EUT and measuring antenna at the same height (1.5 m) and roughly facing each other.
EUT have transmitted the maximum modulation signal and fixed channelize.
- Set spectrum analyzer with condition in section 3.6.2 and tune reference level to observe receiving signal position. Center Frequency: Provide maximum power frequency.
- Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
- Move the measuring antenna height up and down within ± 50 cm of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E".
- Keeping the worst measuring antenna height and turntable angle unchanged, remove the EUT from the turntable and replace it with SG and a replacement standard antenna. Align the replacement antenna with the measuring antenna, and SG sends radio waves of the same frequency as the EUT. Adjust the replacement antenna to the maximum received power.
- Move the measuring antenna height up and down within ± 50 cm, maintain the worst height, and adjust the output power of SG to achieve the power value "E" in step 4 of the spectrum analyzer.
- Calculate EIRP by the formula below.

$$EIRP = G_S - L_F + P_S$$


G_S : Gain of replacement antenna (dBi)
 L_F : Cable loss between SG and replacement antenna (dB)
 P_S : Output power of SG output port (dBm)

3.6.4. TEST SETUP LAYOUT

For EUT radiation measurement

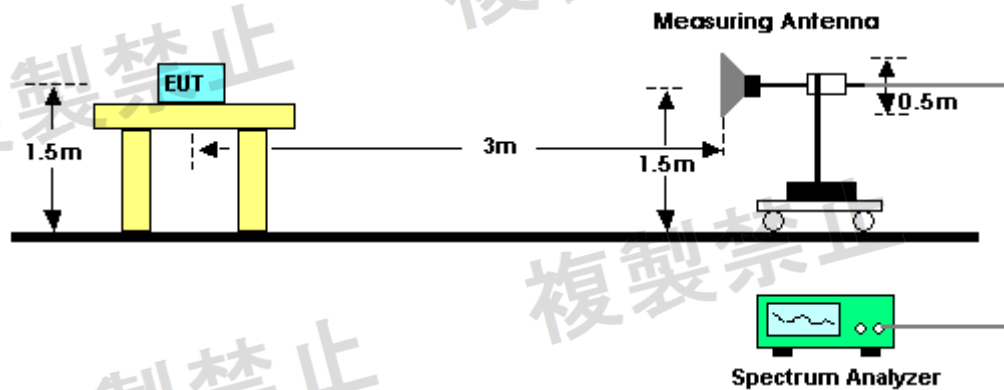

For standard antenna measurement

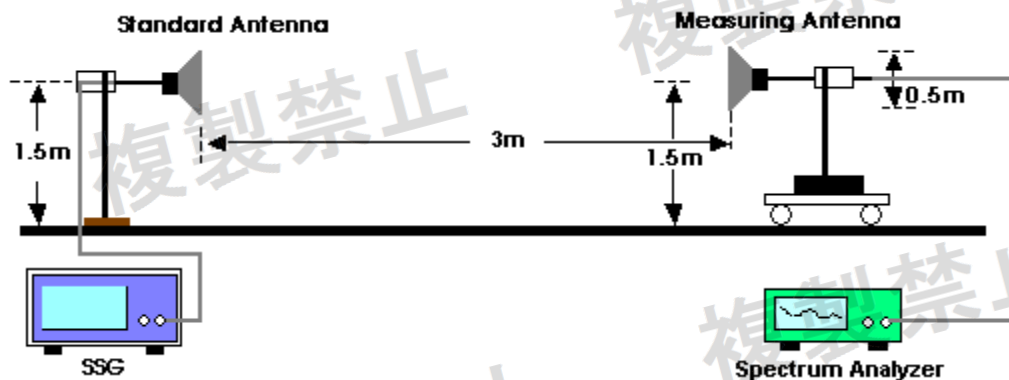

3.6.5. TEST DEVIATION

There is no deviation with the original standard.

3.6.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.6.7. RESULTS OF TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER)

Method of measurement:	See MIC Notice No.88 Appendix No.43 Clause 10
Results:	N/A

3.7. TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT

3.7.1. LIMIT

Item	Limits
	(See Article 49-20 of the Ordinance Regulating Radio Equipment)
3dB antenna beam width	$360^{\circ}/A$ (if $A < 1$; then $A = 1$) $A = \text{EIRP Power [mW]} / 16.36 \text{ [mW]}$ for DSSS and OFDM (20MHz systems), or $A = \text{EIRP Power [mW]} / 8.18 \text{ [mW]}$ for OFDM (40MHz systems)

3.7.2. SETTING

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Span	0Hz
RBW / VBW	1MHz / 1kHz
Y scale	5dB
Detector	Peak
Trace	Max Hold

3.7.3. TEST PROCEDURES

Test method according to Clause 11 of Annex No.43 of MIC Notification No.88.


- Set EUT and measuring antenna at the same height (1.5 m) and roughly facing each other.
EUT have transmitted absence of modulation signal and fixed channelize.
- Set spectrum analyzer with condition in section 3.7.2 and tune reference level to observe receiving signal position. Center Frequency: The center frequency of testing for EUT.
- Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
- Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E".
- Using the EIRP measured in section 3.6.3, calculate the allowable angles Θ_0 of the EUT's main radiation in the horizontal and vertical directions using the following formula.

$$\Theta_0 = 360^{\circ} / A$$

$$\Theta_0$$
: The allowable angle of the main radiation of EUT transmission antenna ($^{\circ}$)
 A : $\text{EIRP Power [mW]} / 16.36$ or 8.18 [mW] (If $A < 1$; then $A = 1$)
- Rotate the EUT in the horizontal direction, reducing the angle of the rotating table by 3 dB from the maximum point of received power "E" (Θ_h : Measure the half angle of the horizontal plane).
- Place the EUT horizontally and rotate it as much as possible around the entire circumference from the main radiation direction Θ_0 to the radiation angle other than the one calculated in step 5, ensuring that the received power drops by more than 3dB from the maximum point "E" of the received power.

8. Vertical tilt EUT, measuring the angle from the horizontal plane when the received power drops by 3dB from the maximum point "E" (θ_v : The half value angle of the vertical plane).
9. After returning the test equipment to position 3, the angle of the main radiation calculated from the direction of the main radiation Θ_0 should be inclined along the vertical plane direction at the widest possible angle (set at 90 degrees or above) for other radiation angles, ensuring that the received power drops by more than 3dB from the maximum point "E" of the received power.

3.7.4. TEST SETUP LAYOUT

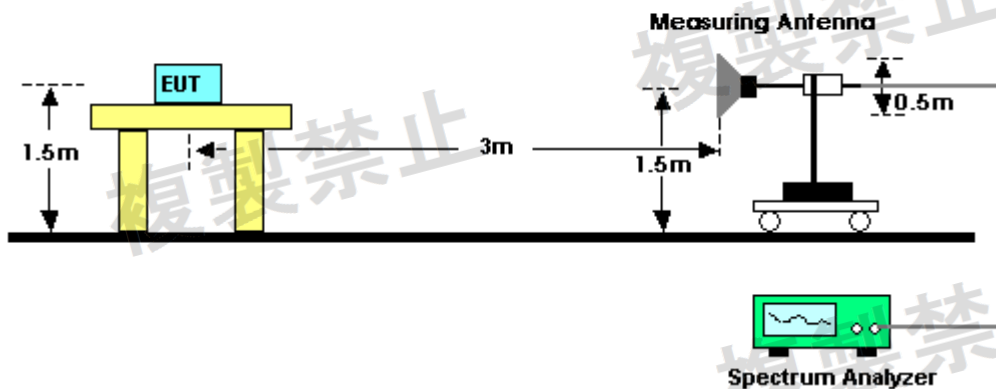

3.7.5. TEST DEVIATION

There is no deviation with the original standard.

3.7.6. EUT OPERATION DURING TEST

The EUT was programmed to be in un-modulation mode.

3.7.7. TEST RESULT OF TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH)

Method of measurement:	See MIC Notice No.88 Appendix No.43 Clause 11
Results:	N/A

3.8. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

3.8.1. LIMIT

Item	Limits (See Article 9-4 Item 5 of the Ordinance Regulating Radio Equipment and Article 6-2 Item 3 of the Regulation for Enforcement of the Radio Law)
Identification code	The wireless equipment of the radio station mainly used in the same station automatically sends or receives the identification code.

3.8.2. MEASURING ID CODE SOFTWARE


PC with Net Tool	Setting
MAC IP List	MAC Scan

3.8.3. TEST PROCEDURES

Test method according to Clause 23 of Annex No.43 of MIC Notification No.88.

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes from EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code:
 - a. Transmit the predetermined identification codes from the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes from the counterpart.
 - d. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

3.8.4. TEST SETUP LAYOUT

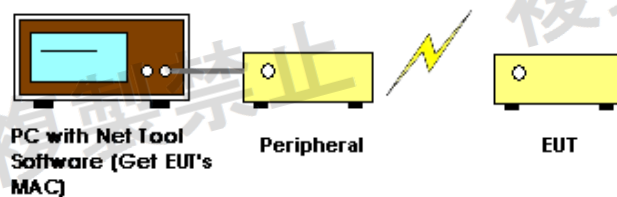

3.8.5. TEST DEVIATION

There is no deviation with the original standard.

3.8.6. EUT OPERATION DURING TEST

The EUT was programmed to be in normal mode.

3.8.7. TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILITY

Test Power:	Normal Voltage
Test Mode:	IEEE 802.11b
Test Result:	Pass (identification code: [00-FF-00-AD-44-31])

MAC Address: 00-FF-00-AD-44-31

3.9. CARRIER SENSE CAPABILITY MEASUREMENT

3.9.1. LIMIT

Item	Limits (See Article 49-20 of the Ordinance Regulating Radio Equipment)
Carrier Sense	Pass - EUT stop RF transmission signal after carrier inject to EUT. (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)

3.9.2. SETTING

The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
RBW / VBW	1MHz / 1MHz
Span	50MHz
Sweep	Continuous
Detector	Peak

3.9.3. TEST PROCEDURES

Test method according to Clause 8 of Annex No.43 of MIC Notification No.88.

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the unmodulation from SG and power level is (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m). Then turn off the RF signal of SG.
2. EUT have transmitted the maximum modulation signal and fixed channelize.
3. Set spectrum analyzer with condition in section 3.9.2 and tune reference level to observe receiving signal position.
4. SG RF signal on.
5. EUT shall be stop the transmitted any signal.
6. SG RF Signal Off.
7. Then EUT will be continuous transmitted signal.

3.9.4. TEST SETUP LAYOUT

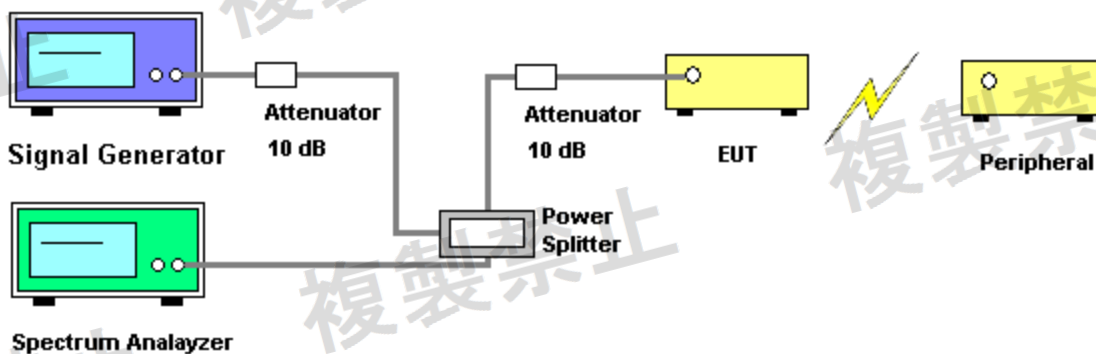

3.9.5. TEST DEVIATION

There is no deviation with the original standard.

3.9.6. EUT OPERATION DURING TEST

The EUT was programmed to be in normal transmitting mode.

3.9.7. TEST RESULT OF CARRIER SENSE CAPABILITY

Test Power:	Normal Voltage
Test Mode:	IEEE 802.11n-HT40 / IEEE 802.11ax-HE40 / IEEE 802.11be-EHT40
Test Result:	Pass

3.10. CONSTRUCTION PROTECTION CONFIRMATION METHOD**3.10.1. LIMIT**

(See Article 49-20 of the Ordinance Regulating Radio Equipment)

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

3.10.2. CONFIRMATION METHOD

The RF and modulation portions are protected against illegal modification as following method:

Tick the appropriate box	
	1. Sealed with special screws.
	2. Plastic chassis is being welded using ultrasonic waves.
	3. Chassis is glued using a special adhesive.
	4. Metal covers are spot-fused.
	5. Cover is specially interlocked.
✓	6. RF and Modulation components are covered with shielding case and this shielding case is soldered.
	7. Shield case is welded at RF and modulation parts, and ID-ROM is welded using the BGA Method.
	8. Shield case is welded at RF and modulation parts, and ID-ROM is glued at its lead with a special adhesive.
	9. Shield case is welded at RF and modulation parts, and ID-ROM is glued with a non-transparent laminating agent.
	10. RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable part on PCB or adjustable parts are not exposed.

4. LIST OF MEASURING EQUIPMENTS

Kind of Equipment	Manufacturer	Model No.	Serial No.	Validity Date (See Note 1)	Calibration Agency	Class Information
EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Oct. 17, 2026	CEPREI Calibration and Testing Center	(c)
Measurement Software	BTL	BTL Conducted Test	N/A	N/A	N/A	-
Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	May 27, 2026	CEPREI Calibration and Testing Center	(c)
Multimeter	FLUKE	15B+(TR13)	45123773W S	May 17, 2026	CEPREI Calibration and Testing Center	(c)
AC power source	Preen	AFC-S-1250	F123080107	Nov. 21, 2026	CEPREI Calibration and Testing Center	(c)
Power Measurement Unit	Tonscend	JS0806-2	806JS2X020 704251007	Jun. 09, 2026	CEPREI Calibration and Testing Center	(c)
Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026	CEPREI Calibration and Testing Center	(c)
MXG Vector Signal Generator	Agilent	N5182A	MY47420312	May 17, 2026	CEPREI Calibration and Testing Center	(c)
EXA Spectrum Analyzer	Agilent	N9010A	MY54200164	Nov. 21, 2026	CEPREI Calibration and Testing Center	(c)
Cable	RegalWay	RWP50-402-SM SM-2M	N/A	N/A	N/A	-
Cable	RegalWay	RWP50-402-SM SM-2M	N/A	N/A	N/A	-
Cable	RegalWay	RWP50-402-SM SM-1.5M	N/A	N/A	N/A	-
Cable	RegalWay	RWP50-402-SM SM-1M	N/A	N/A	N/A	-
Cable	RegalWay	RWP50-402-SM SM-1M	N/A	N/A	N/A	-
Cable	RegalWay	RWP50-402-SM SM-1.5M	N/A	N/A	N/A	-
Power Divider	RegalWay	RW-PD2-01018 0SF30	N/A	Nov. 21, 2026	CEPREI Calibration and Testing Center	(c)
Power Divider	RegalWay	RW-PD2-0118S F30	N/A	May 27, 2026	CEPREI Calibration and Testing Center	(c)
Power Divider	RegalWay	RW-PD4-0118S F30	N/A	May 27, 2026	CEPREI Calibration and Testing Center	(c)
Attenuator	RegalWay	RWPA-6000-110 -MA	N/A	May 27, 2026	CEPREI Calibration and Testing Center	(c)
Shielding box	JiaChen	JC-PB2015	PB20132310 378A	N/A	N/A	-
Power Splitter	Mini-Circuits	ZN4PD-642W-S +	SN80632161 8-2	May 17, 2026	CEPREI Calibration and Testing Center	(c)
Archer TXE75E	TP-LINK	TXE75E	N/A	N/A	N/A	-


Remark:

- a. Calibration conducted by the National Institute of Information and Communications Technology (NITC) in Japan (hereinafter referred to as "NITC") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- b. Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No.51 of 1992).
- c. Calibration conducted in countries except Japan, which shall be equivalent to the calibration Conducted by the NITC or a designation agency under Article 102-18 paragraph (1).
- d. Calibration, etc. conducted by using measuring instruments and other equipment listed in the above column of appended table No.3, which shall have been given any type of calibration, etc. listed above from (a) to (c). From JRL Article 24-2, paragraph 4, item 2.

Note:

1. "N/A" denotes the equipment is verified or confirmed internally by test lab.
2. The calibration interval of the above test instruments is 12 months.
3. The Calibration Agency(CHINA CEPREI LABORATORY) address for the Building 9, No. 78, West Zhucun Avenue, Zhucun Street, Zengcheng District, Guangzhou City.




5. EUT TEST PHOTO

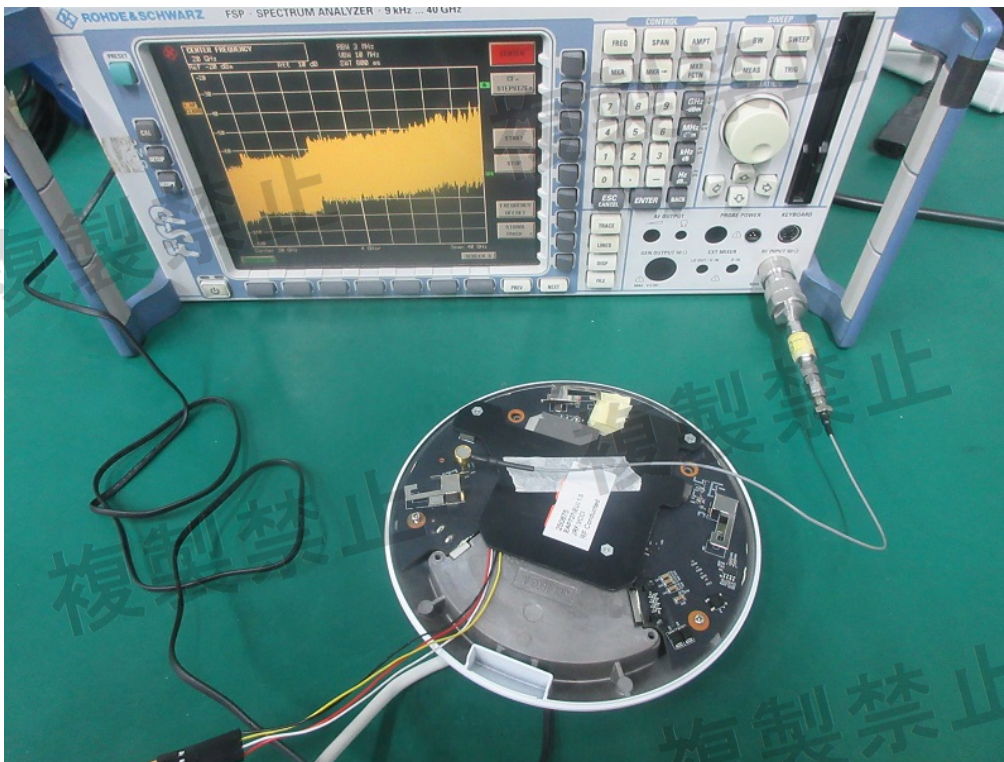

APPENDIX A - FREQUENCY TOLERANCE




Test Mode: TX Mode_ IEEE 802.11b

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2412.0028	2442.0012	2472.0012	-
Frequency Tolerance (ppm)	+1.16	+0.49	+0.49	Limit: -50≤ppm≤50

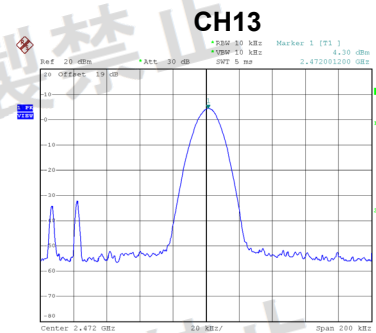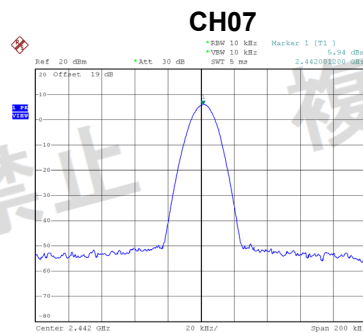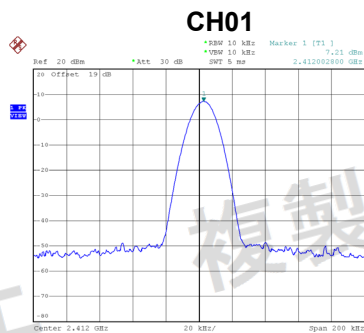


Test Mode: TX Mode_ IEEE 802.11g

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2412.0028	2442.0012	2472.0012	-
Frequency Tolerance (ppm)	+1.16	+0.49	+0.49	Limit: -50≤ppm≤50

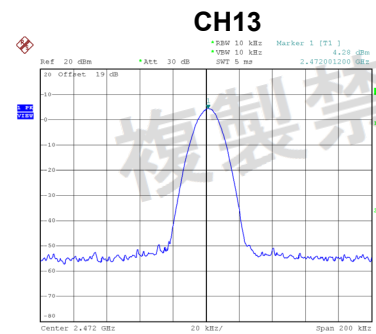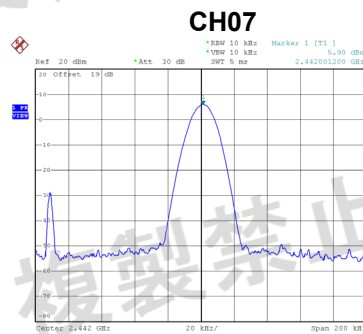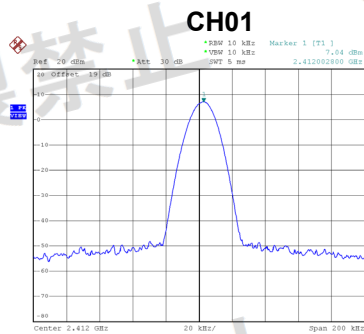


Test Mode: TX Mode_ IEEE 802.11n(HT20)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2412.002	2442.0012	2472.0012	-
Frequency Tolerance (ppm)	+0.83	+0.49	+0.49	Limit: $-50 \leq \text{ppm} \leq 50$

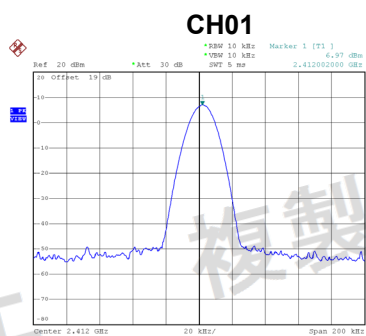

Date: 30.DEC.2025 13:17:06

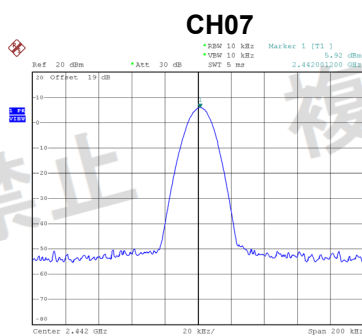


Date: 30.DEC.2025 13:18:11

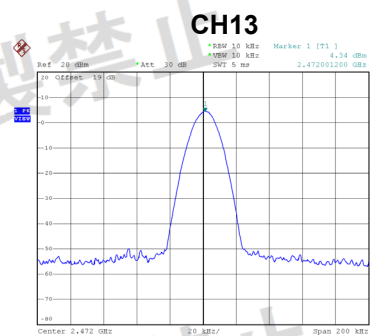


Date: 30.DEC.2025 13:19:05

Test Mode: TX Mode_ IEEE 802.11n(HT40)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2422.0016	2442.0012	2462.0012	-
Frequency Tolerance (ppm)	+0.66	+0.49	+0.49	Limit: $-50 \leq \text{ppm} \leq 50$

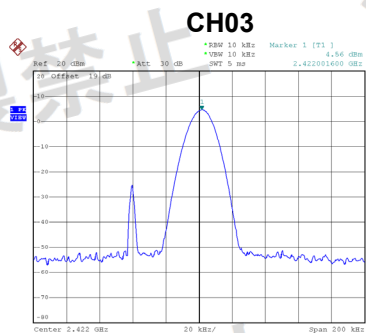

Date: 30.DEC.2025 13:17:17

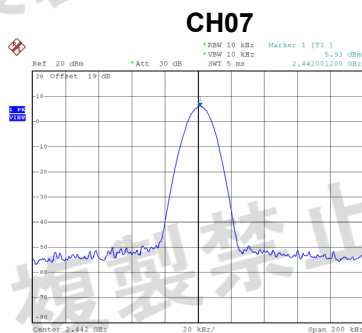




Date: 30.DEC.2025 13:18:21

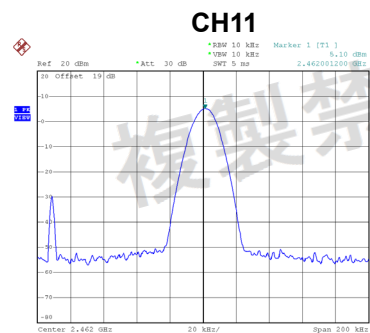

Date: 30.DEC.2025 13:18:34




Test Mode: TX Mode_ IEEE 802.11ax(HE20)

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2412	2441.9996	2471.9996	-
Frequency Tolerance (ppm)	0.00	-0.16	-0.16	Limit: $-50 \leq \text{ppm} \leq 50$

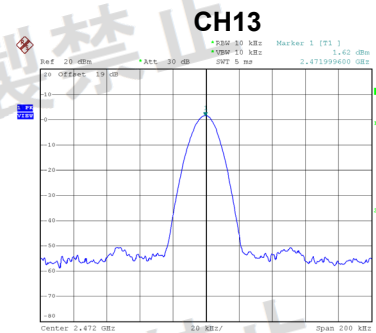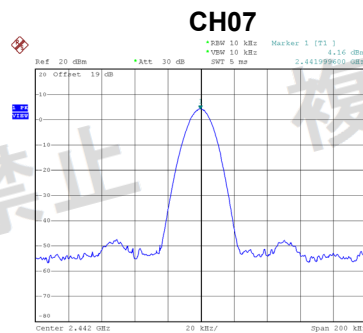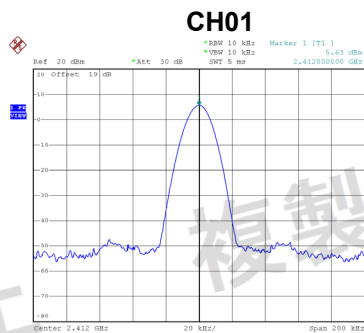




Test Mode: TX Mode_ IEEE 802.11ax(HE40)

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2421.9996	2441.9996	2461.9996	-
Frequency Tolerance (ppm)	-0.17	-0.16	-0.16	Limit: $-50 \leq \text{ppm} \leq 50$

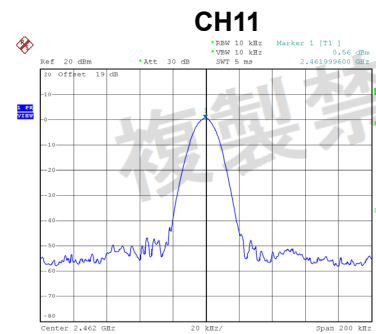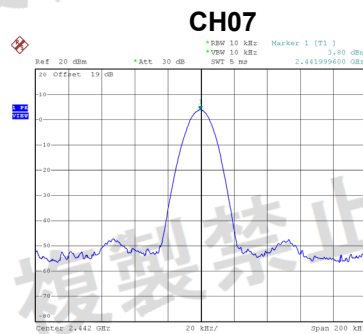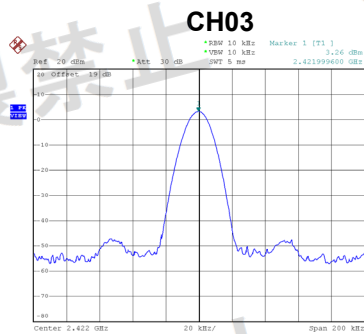




Test Mode: TX Mode_ IEEE 802.11be(EHT20)

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2411.9992	2442	2471.9988	-
Frequency Tolerance (ppm)	-0.33	0.00	-0.49	Limit: $-50 \leq \text{ppm} \leq 50$

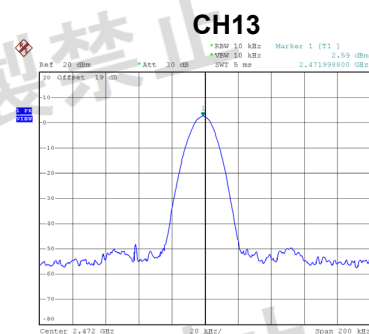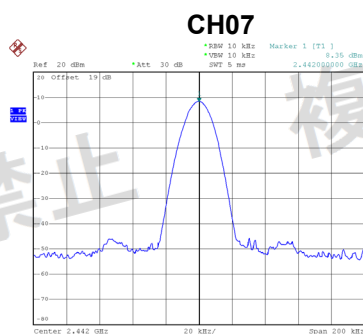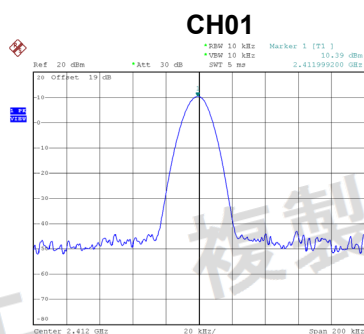

Test Mode: TX Mode_ IEEE 802.11be(EHT40)

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Measured Frequency (MHz)	2422.0004	2441.9988	2461.9988	-
Frequency Tolerance (ppm)	+0.17	-0.49	-0.49	Limit: $-50 \leq \text{ppm} \leq 50$

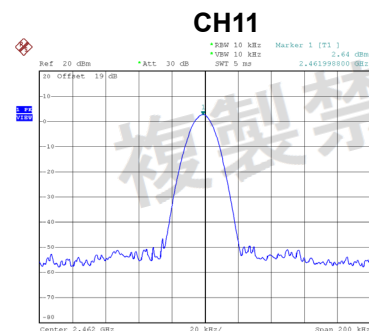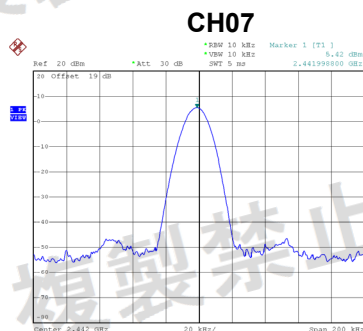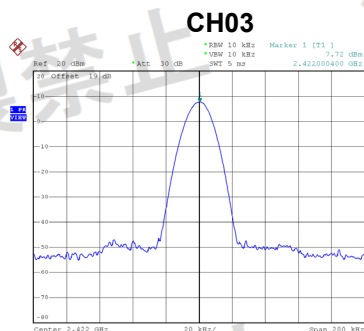


APPENDIX B - OCCUPIED BANDWIDTH

Test Mode: TX Mode_ IEEE 802.11b


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	12.36	12.60	12.60	Limit ≤ 26 MHz

CH01 (99 %)

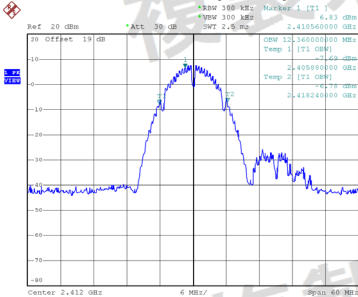


Date: 30.DEC.2025 09:48:01

CH07 (99 %)

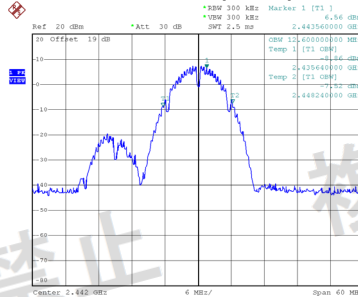

Date: 30.DEC.2025 09:51:39

CH13 (99 %)

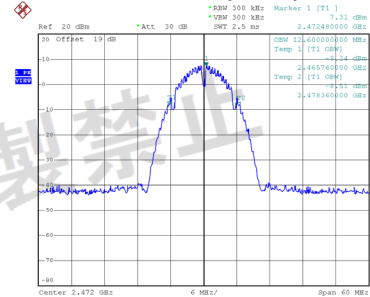


Date: 30.DEC.2025 09:53:10

Test Mode: TX Mode_ IEEE 802.11g


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	16.44	16.56	16.44	Limit ≤ 26 MHz

CH01 (99 %)




Date: 30.DEC.2025 09:54:30

CH07 (99 %)



Date: 30.DEC.2025 09:55:43

CH13 (99 %)

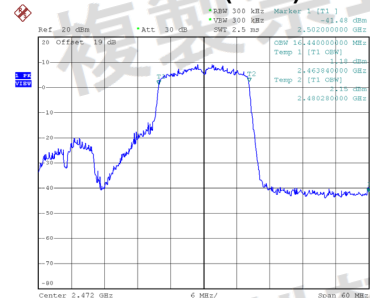


Date: 30.DEC.2025 09:56:53

Test Mode: TX Mode_ IEEE 802.11n(HT20)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	17.64	17.64	17.52	Limit ≤ 26 MHz

CH01 (99 %)




Date: 30.DEC.2025 09:59:10

CH07 (99 %)



Date: 30.DEC.2025 10:00:25

CH13 (99 %)

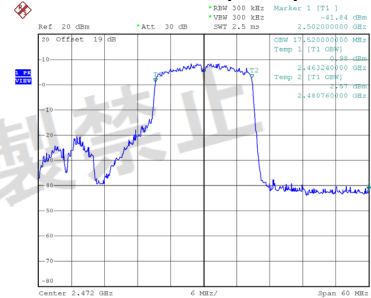


Date: 30.DEC.2025 10:02:59

Test Mode: TX Mode_ IEEE 802.11n(HT40)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	35.80	36.00	36.00	Limit ≤ 40 MHz

CH03 (99 %)




Date: 30.DEC.2025 10:09:44

CH07 (99 %)



Date: 30.DEC.2025 10:10:19

CH11 (99 %)

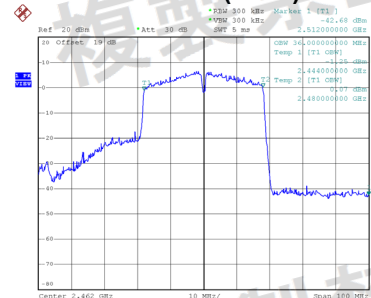


Date: 30.DEC.2025 10:19:32

Test Mode: TX Mode_IEEE 802.11ax(HE20)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	18.84	18.84	18.84	Limit ≤ 26 MHz

CH01 (99 %)




Date: 30.DEC.2025 10:22:28

CH07 (99 %)



Date: 30.DEC.2025 10:23:45

CH13 (99 %)

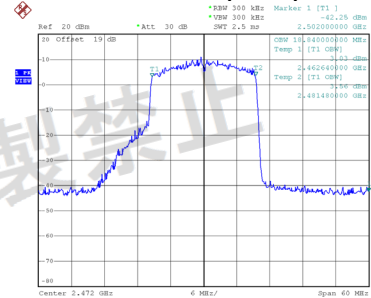


Date: 30.DEC.2025 10:25:58

Test Mode: TX Mode_IEEE 802.11ax(HE40)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	37.60	37.60	37.60	Limit ≤ 40 MHz

CH03 (99 %)




Date: 30.DEC.2025 11:23:17

CH07 (99 %)



Date: 30.DEC.2025 11:24:36

CH11 (99 %)

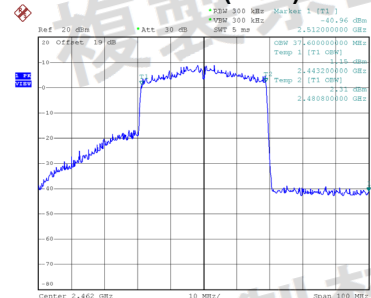


Date: 30.DEC.2025 11:26:42

Test Mode: TX Mode_ IEEE 802.11be(EHT20)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2412	2442	2472	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	18.84	18.84	18.84	Limit ≤ 26 MHz

CH01 (99 %)




Date: 30.DEC.2025 11:28:43

CH07 (99 %)



Date: 30.DEC.2025 11:30:01

CH13 (99 %)

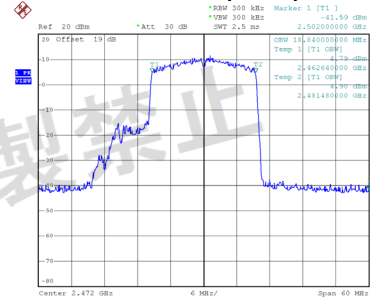


Date: 30.DEC.2025 11:31:13

Test Mode: TX Mode_ IEEE 802.11be(EHT40)


Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	2422	2442	2462	Low/Mid/High of test frequency range
Occupied Bandwidth (MHz)	37.60	37.80	37.60	Limit ≤ 40 MHz

CH03 (99 %)




Date: 30.DEC.2025 11:41:00

CH07 (99 %)



Date: 30.DEC.2025 11:42:13

CH11 (99 %)

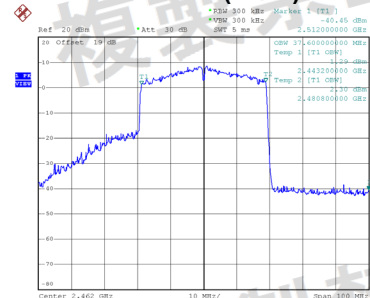

Date: 30.DEC.2025 11:45:44

APPENDIX C - UNWANTED EMISSION INTENSITY

Test Mode:	TX Mode_IEEE 802.11b
------------	----------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	703.18	565.44	734.22	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0241	0.0265	0.0359	
	※2	MHz	2325.97	2264.94	2228.88	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0394	0.0455	0.0430	
	※3	MHz	2399.92	2399.84	2389.89	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.1227	0.0555	0.0685	
	※4	MHz	2484.57	2494.68	2483.76	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0479	0.0465	0.1574	
※5	MHz	3616.89	3116.72	3576.88	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)	
	μW/MHz	0.1871	0.1901	0.2128		


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

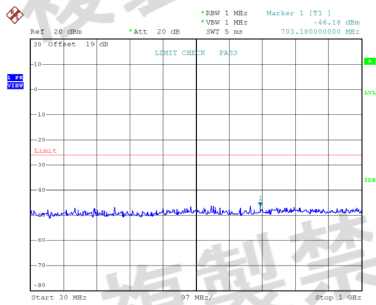

Date: 30.DEC.2025 09:48:11


CH07

※1: 30MHz≤f≤1000MHz

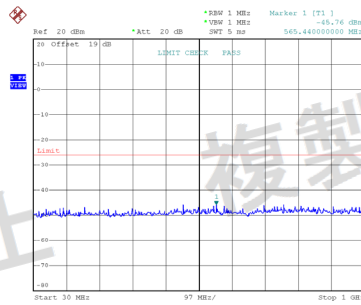


Date: 30.DEC.2025 09:51:50

CH13

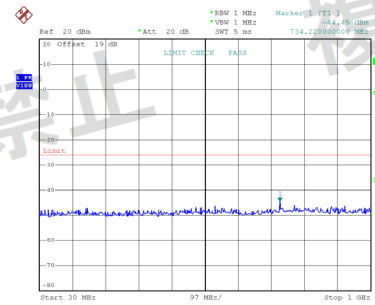


Date: 30.DEC.2025 09:53:20


※2: 1000MHz≤f<2387MHz

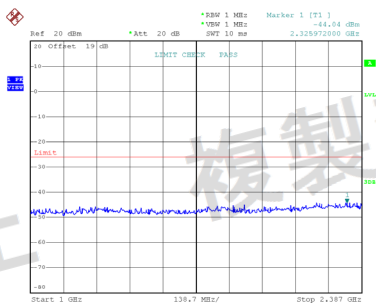

Date: 30.DEC.2025 09:48:22

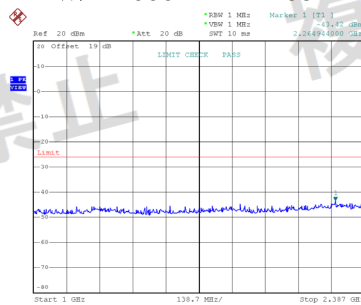


Date: 30.DEC.2025 09:52:01

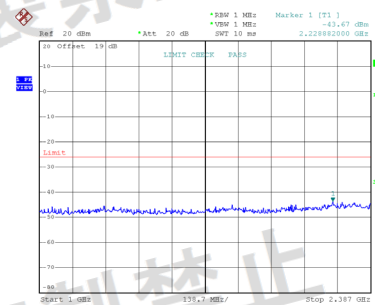


Date: 30.DEC.2025 09:53:31


※3: 2387MHz≤f<2400MHz

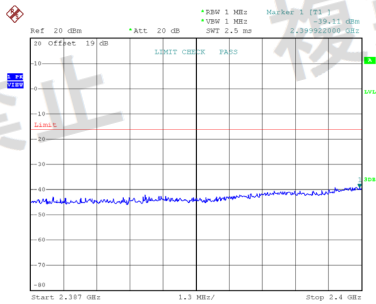

Date: 30.DEC.2025 09:48:33

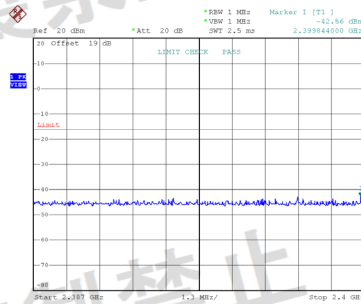


Date: 30.DEC.2025 09:52:12

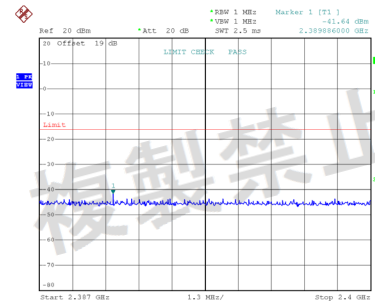


Date: 30.DEC.2025 09:53:42


※4: 2483.5MHz≤f≤2496.5MHz

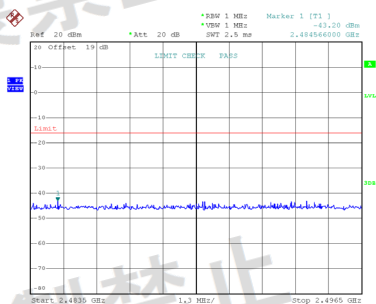

Date: 30.DEC.2025 09:48:43

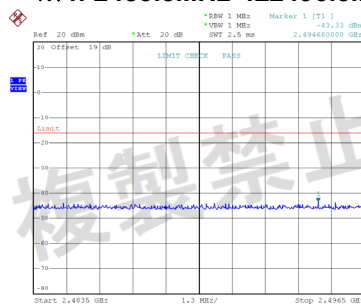


Date: 30.DEC.2025 09:52:22

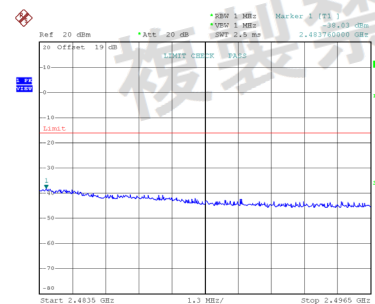


Date: 30.DEC.2025 09:53:52

CH01

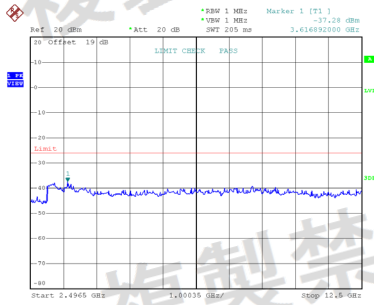


CH07

※5: 2496.5MHz<f

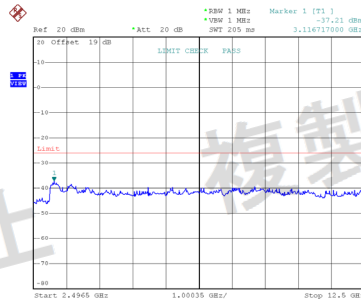

CH13

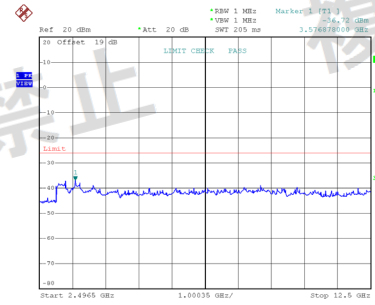

Test Mode:	TX Mode_ IEEE 802.11g
------------	-----------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	674.08	705.12	842.86	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0282	0.0309	0.0294	
	※2	MHz	2273.27	2287.14	2292.68	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0482	0.0507	0.0418	
	※3	MHz	2399.97	2394.02	2398.31	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.1828	0.0472	0.0469	
	※4	MHz	2491.66	2492.44	2483.58	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0577	0.0442	0.7998	
	※5	MHz	3276.77	3096.71	3136.72	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.1690	0.2355	0.2051	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

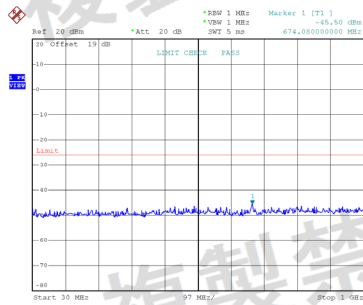

Date: 30,DEC,2025 09:54:46


CH07

※1: 30MHz≤f≤1000MHz

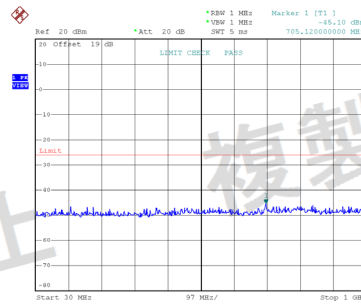


Date: 30,DEC,2025 09:55:53

CH13

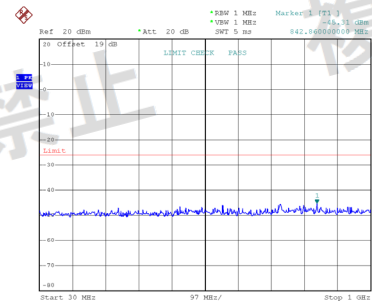


Date: 30,DEC,2025 09:57:03


※2: 1000MHz≤f<2387MHz

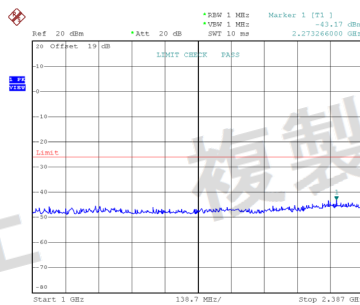

Date: 30,DEC,2025 09:54:52

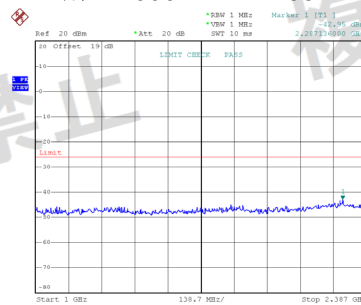


Date: 30,DEC,2025 09:56:04

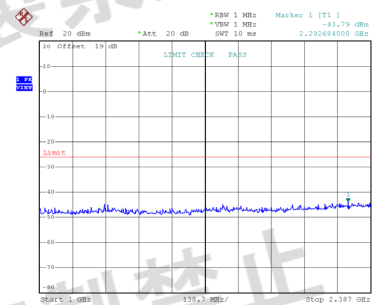


Date: 30,DEC,2025 09:57:14


※3: 2387MHz≤f<2400MHz

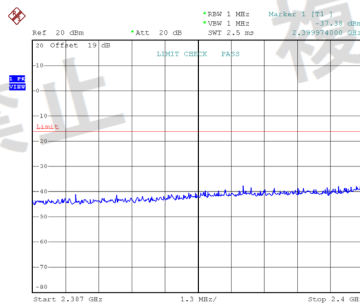

Date: 30,DEC,2025 09:55:03

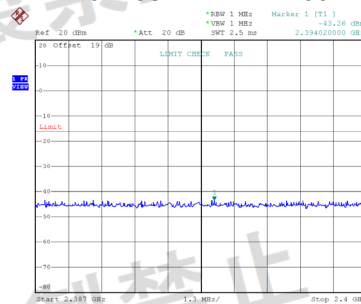


Date: 30,DEC,2025 09:56:15

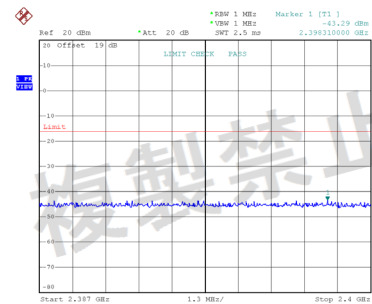


Date: 30,DEC,2025 09:57:25


※4: 2483.5MHz≤f≤2496.5MHz

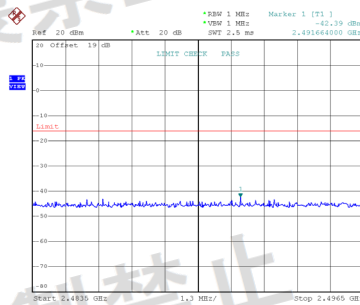

Date: 30,DEC,2025 09:55:13

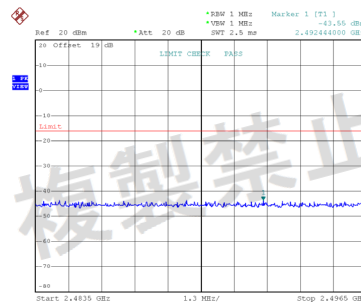


Date: 30,DEC,2025 09:56:25

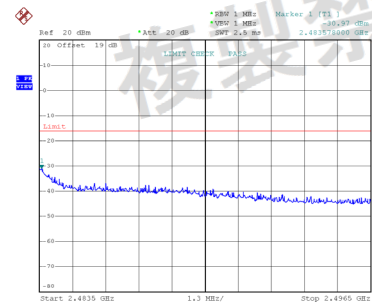

Date: 30,DEC,2025 09:57:35


CH01

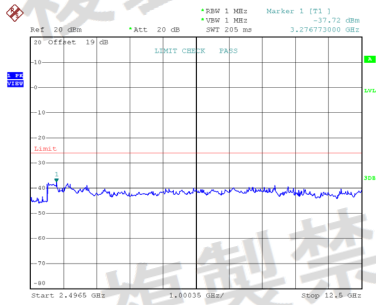

Date: 30,DEC,2025 09:55:24


CH07

※5: 2496.5MHz<f

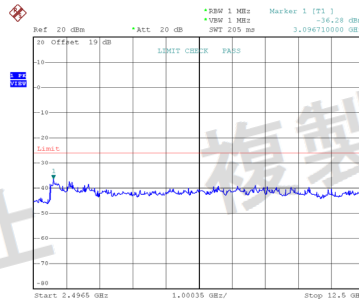

Date: 30,DEC,2025 09:56:36

CH13

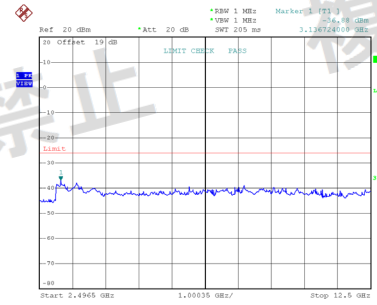

Date: 30,DEC,2025 09:57:47

Test Mode:	TX Mode_IEEE 802.11n(HT20)
------------	----------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	672.14	559.62	734.22	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0336	0.0313	0.0332	
	※2	MHz	2359.26	2373.13	2323.20	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0601	0.0443	0.0488	
	※3	MHz	2399.69	2393.71	2390.67	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.3177	0.0501	0.0485	
	※4	MHz	2492.55	2485.48	2483.50	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0787	0.0474	3.1696	
	※5	MHz	3176.74	3056.70	3036.69	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.1828	0.1633	0.2046	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas


CH01

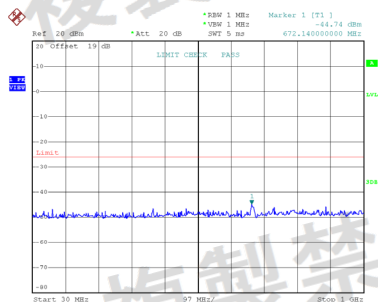

Date: 30.DEC.2025 09:59:26


CH07

※1: 30MHz≤f<1000MHz

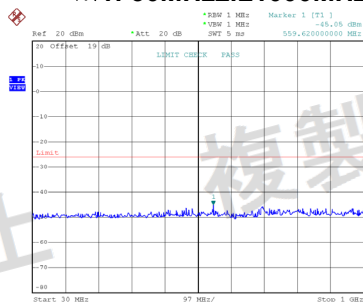


Date: 30.DEC.2025 10:00:35

CH13

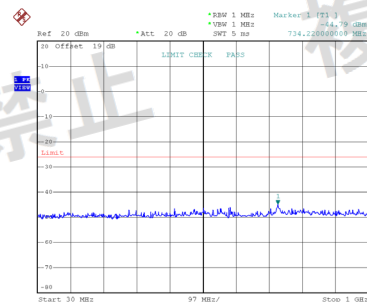


Date: 30.DEC.2025 10:03:09


※2: 1000MHz≤f<2387MHz

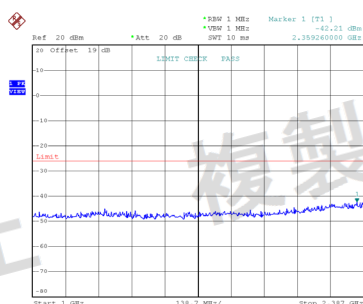

Date: 30.DEC.2025 09:59:31

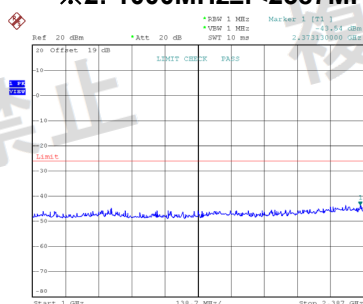


Date: 30.DEC.2025 10:00:46

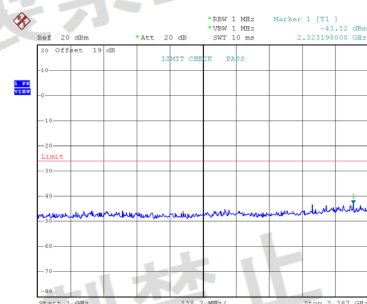


Date: 30.DEC.2025 10:03:20


※3: 2387MHz≤f<2400MHz

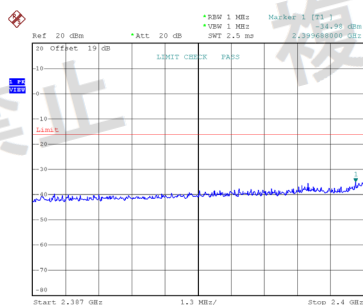

Date: 30.DEC.2025 09:59:42

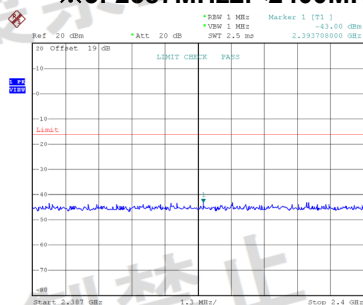


Date: 30.DEC.2025 10:00:57

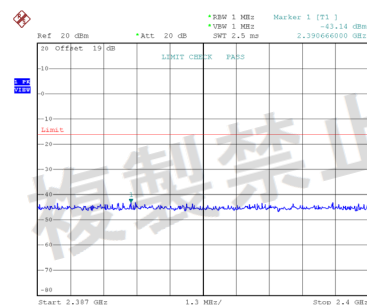


Date: 30.DEC.2025 10:03:31


※4: 2483.5MHz<f≤2496.5MHz

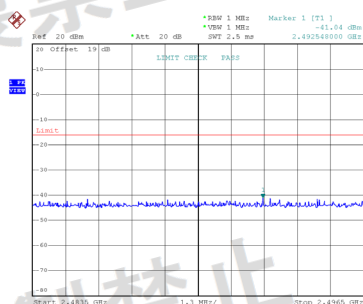

Date: 30.DEC.2025 09:59:52

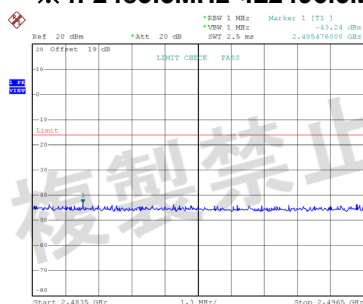


Date: 30.DEC.2025 10:01:07

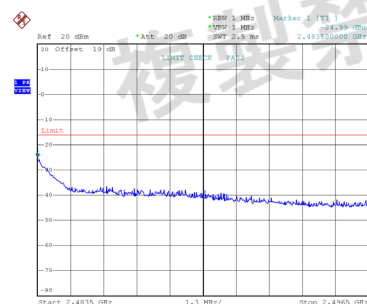

Date: 30.DEC.2025 10:03:41


CH01

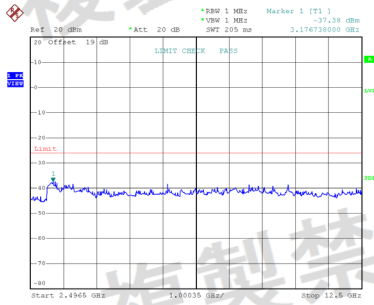

Date: 30,DEC,2025 10:00:08


CH07

※5: 2496.5MHz<f

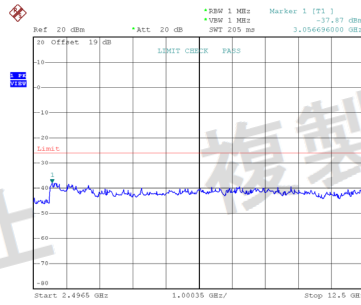

Date: 30,DEC,2025 10:01:18

CH13

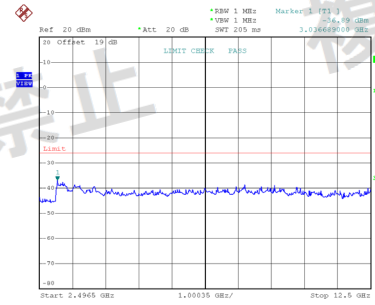

Date: 30,DEC,2025 10:03:52

Test Mode:	TX Mode_ IEEE 802.11n(HT40)
------------	-----------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	967.02	707.06	722.58	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0235	0.0294	0.0272	
	※2	MHz	2387.00	2328.75	2312.10	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0475	0.0405	0.0461	
	※3	MHz	2400.00	2388.14	2393.71	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.9683	0.0561	0.0553	
	※4	MHz	2487.69	2485.32	2483.50	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0505	0.0610	0.4819	
	※5	MHz	3136.72	3216.75	3116.72	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.1552	0.1622	0.1706	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH03

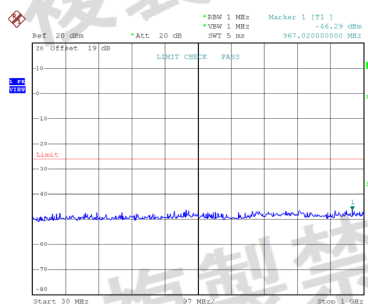


CH07




※1: 30MHz≤f<1000MHz

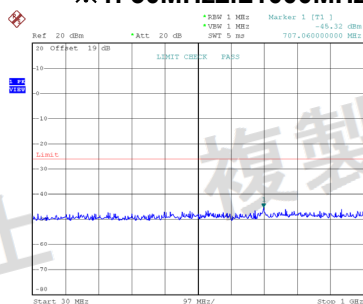




CH11

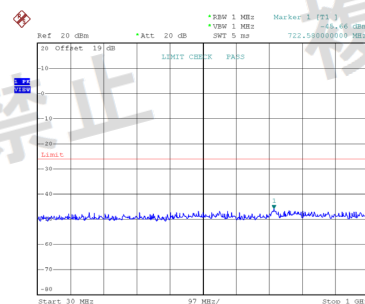




※2: 1000MHz≤f<2387MHz

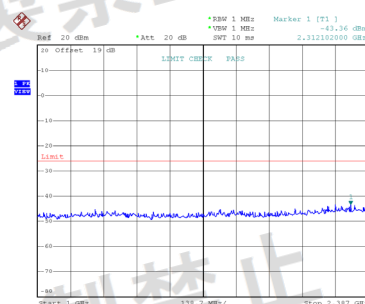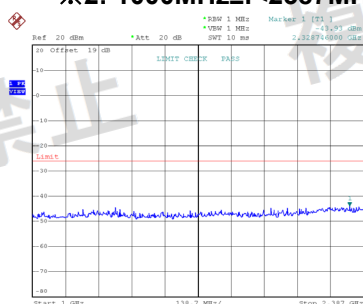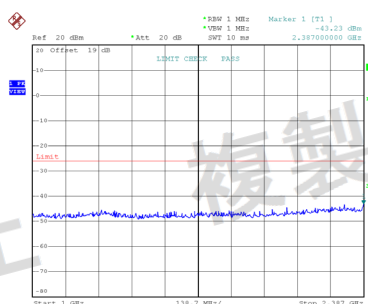


※3: 2387MHz≤f<2400MHz

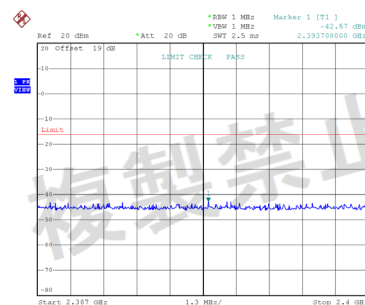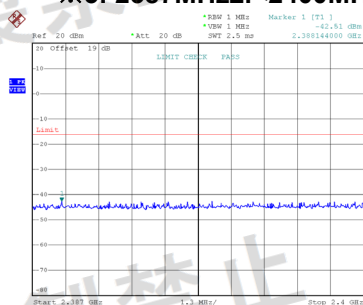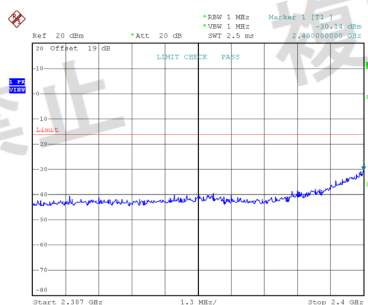

※4: 2483.5MHz≤f≤2496.5MHz

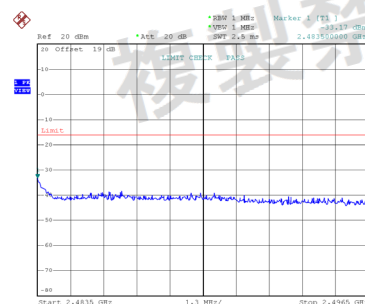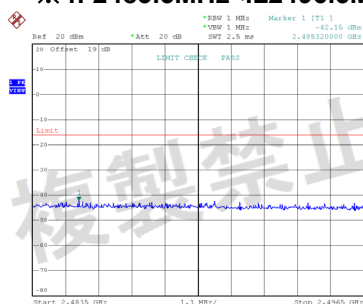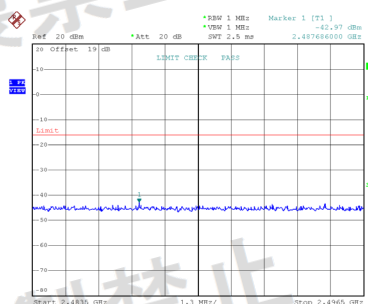


CH03

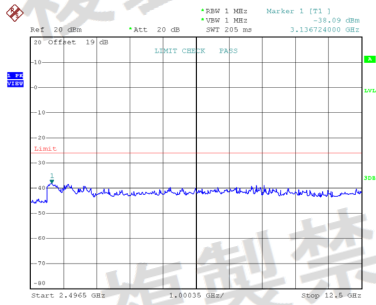

Date: 30,DEC,2025 10:10:36


CH07

※5: 2496.5MHz<f

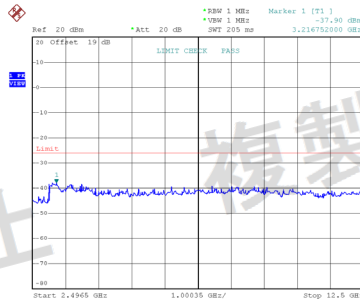

Date: 30,DEC,2025 10:19:13

CH11

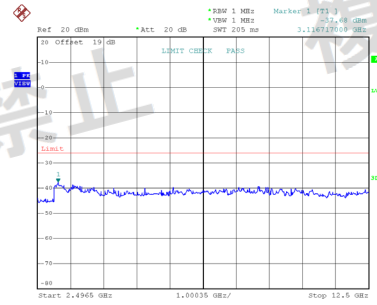

Date: 30,DEC,2025 10:20:25

Test Mode:	TX Mode_IEEE 802.11ax(HE20)
------------	-----------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	676.02	701.24	736.16	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0336	0.0299	0.0250	
	※2	MHz	2387.00	2345.39	2339.84	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0804	0.0634	0.0445	
	※3	MHz	2399.95	2394.44	2388.20	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	2.3121	0.1019	0.0541	
	※4	MHz	2484.72	2489.82	2483.50	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0628	0.0667	2.7102	
※5	MHz	3556.87	3176.74	3116.72	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)	
	μW/MHz	0.1603	0.2070	0.1770		

Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor = 10 log (X)

X = the total number of antennas

Explanation of Marker and ZeroSP test:

- 1) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 2) The testing of ZeroSP is the worst, covering the entire frequency band.


CH01

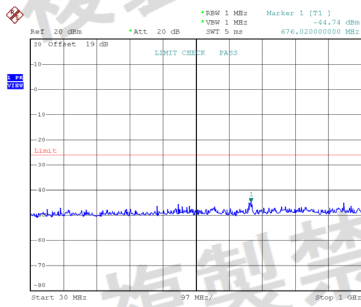

Date: 30.DEC.2025 10:22:39


CH07

※1: 30MHz≤f<1000MHz

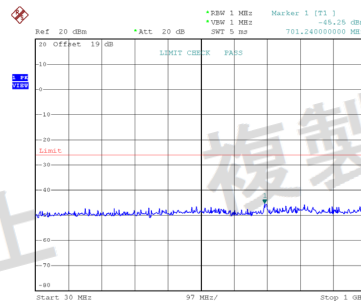


Date: 30.DEC.2025 10:23:55

CH13

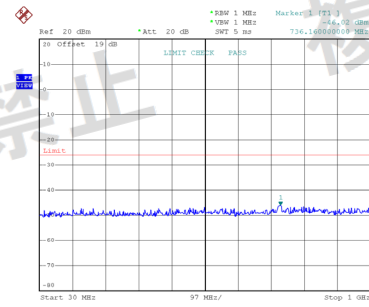


Date: 30.DEC.2025 10:26:08


※2: 1000MHz≤f<2387MHz

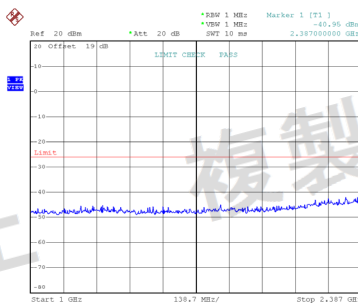

Date: 30.DEC.2025 10:22:49

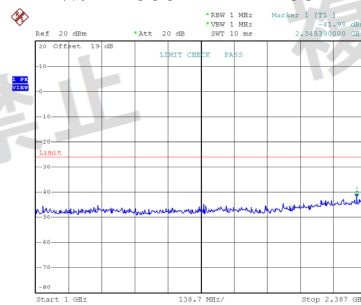


Date: 30.DEC.2025 10:24:06

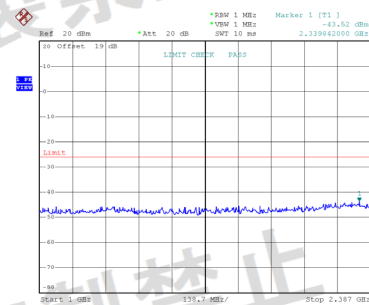


Date: 30.DEC.2025 10:26:19


※3: 2387MHz≤f<2400MHz

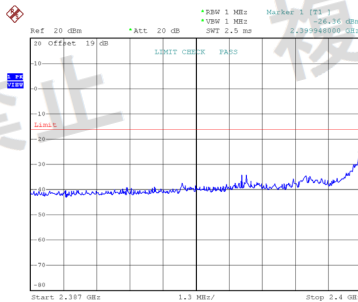

Date: 30.DEC.2025 10:23:00

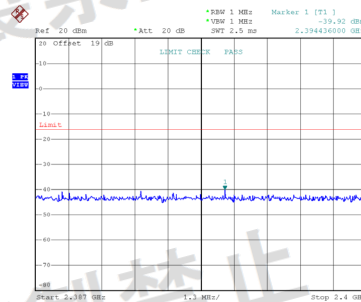


Date: 30.DEC.2025 10:24:17

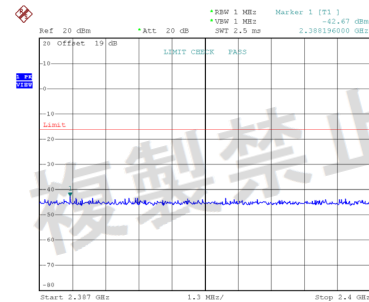


Date: 30.DEC.2025 10:26:30

CH01

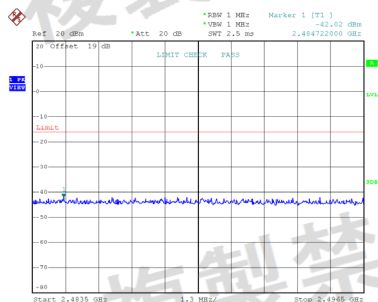


CH07


※4: 2483.5MHz<f≤2496.5MHz

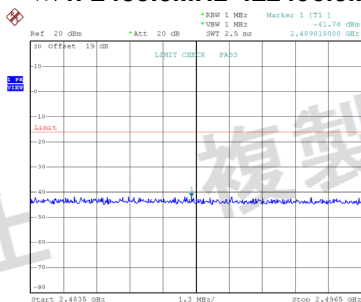




CH13

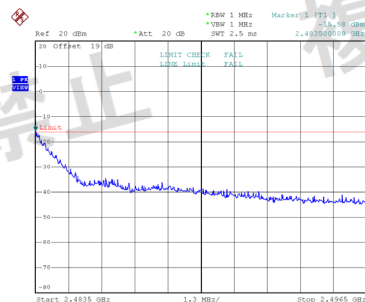

ZeroSP

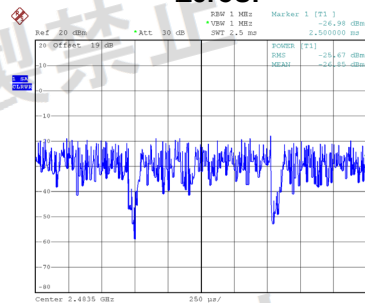

※5: 2496.5MHz<f

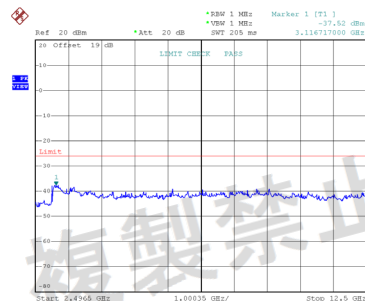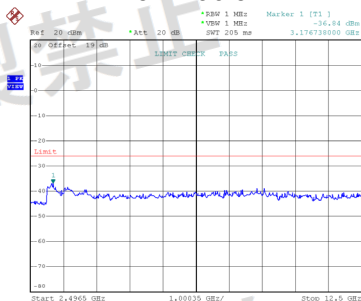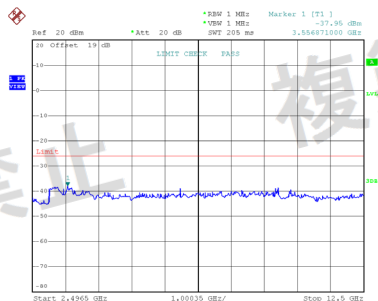

Test Mode:	TX Mode_ IEEE 802.11ax(HE40)
------------	------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	794.36	840.92	726.46	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0425	0.0277	0.0313	
	※2	MHz	2387.00	1868.26	2217.79	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0670	0.0437	0.0530	
	※3	MHz	2399.95	2390.17	2390.28	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	1.5346	0.0700	0.0612	
	※4	MHz	2496.03	2484.64	2483.58	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0598	0.0773	3.4277	
	※5	MHz	3176.74	3096.71	3676.91	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.2371	0.2148	0.2089	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH03

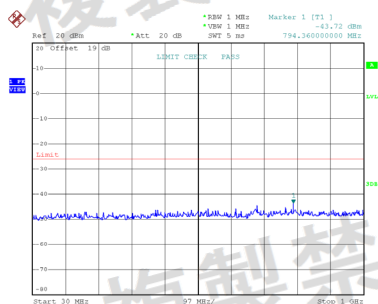

Date: 30.DEC.2025 11:23:26


CH07

※1: 30MHz≤f<1000MHz

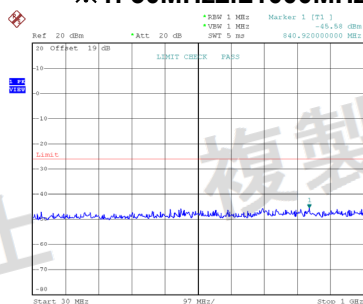


Date: 30.DEC.2025 11:24:45

CH11

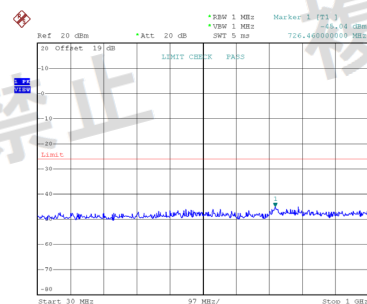


Date: 30.DEC.2025 11:26:52


※2: 1000MHz≤f<2387MHz

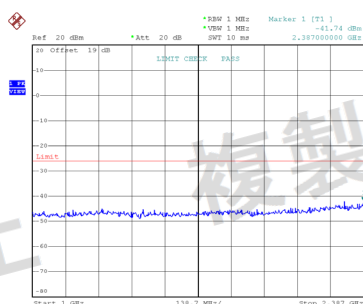

Date: 30.DEC.2025 11:23:37

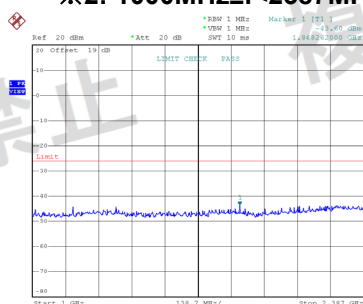


Date: 30.DEC.2025 11:24:56

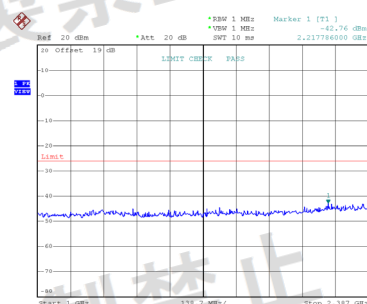


Date: 30.DEC.2025 11:27:02


※3: 2387MHz≤f<2400MHz

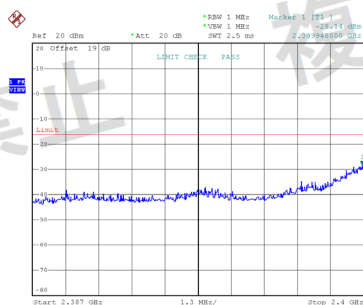

Date: 30.DEC.2025 11:23:47

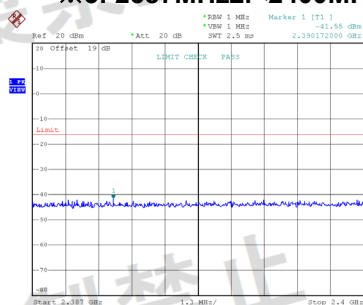


Date: 30.DEC.2025 11:25:06

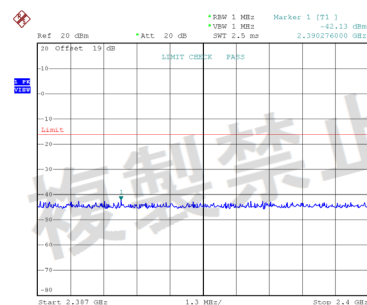


Date: 30.DEC.2025 11:27:13


※4: 2483.5MHz≤f≤2496.5MHz

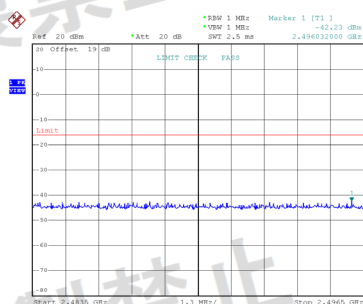

Date: 30.DEC.2025 11:23:57

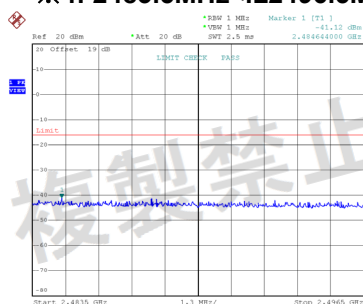


Date: 30.DEC.2025 11:25:16

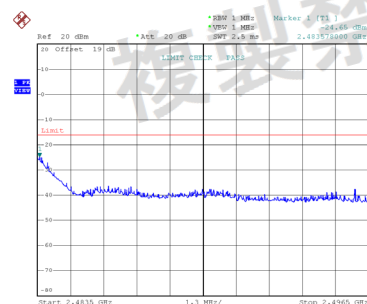

Date: 30.DEC.2025 11:27:22


CH03

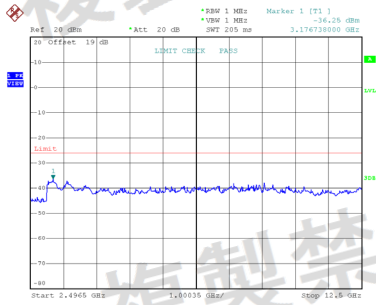

Date: 30,DEC,2025 11:24:07


CH07

※5: 2496.5MHz<f

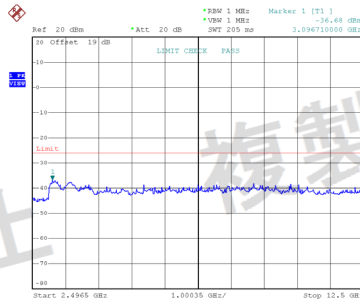

Date: 30,DEC,2025 11:25:26

CH11

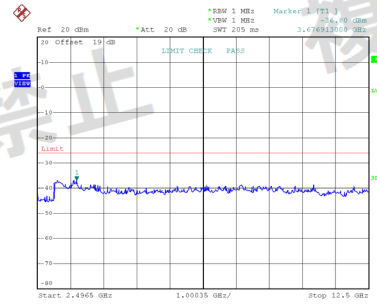

Date: 30,DEC,2025 11:27:33

Test Mode:	TX Mode_IEEE 802.11be(EHT20)
------------	------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	670.20	703.18	736.16	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0407	0.0337	0.0612	
	※2	MHz	2384.23	2331.52	2387.00	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0873	0.0698	0.0897	
	※3	MHz	2399.95	2399.58	2394.05	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	2.7102	0.1140	0.0927	
	※4	MHz	2492.94	2487.76	2483.58	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0800	0.0804	3.2211	
※5	MHz	3236.76	3176.74	3116.72	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)	
	μW/MHz	0.2113	0.2301	0.2023		

Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor = 10 log (X)

X = the total number of antennas

Explanation of Marker and ZeroSP test:

- 1) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 2) The testing of ZeroSP is the worst, covering the entire frequency band.


CH01

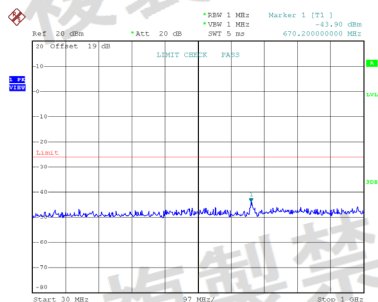

Date: 30.DEC.2025 11:28:58


CH07

※1: 30MHz≤f≤1000MHz

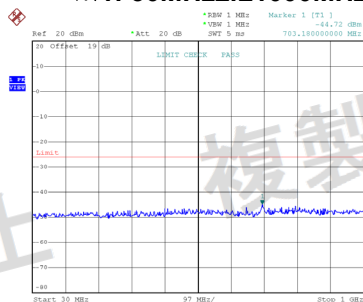


Date: 30.DEC.2025 11:30:10

CH13

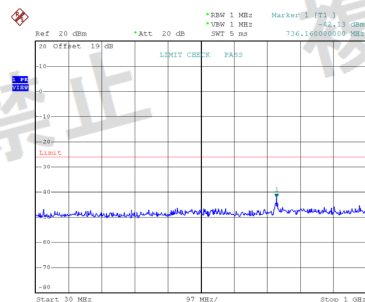


Date: 30.DEC.2025 11:31:23


※2: 1000MHz≤f<2387MHz

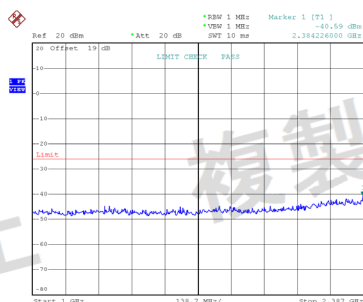

Date: 30.DEC.2025 11:29:03

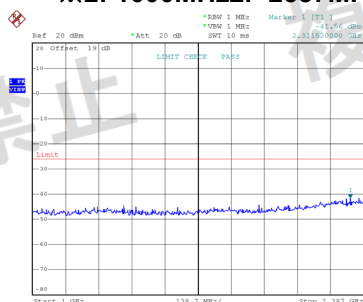


Date: 30.DEC.2025 11:30:21

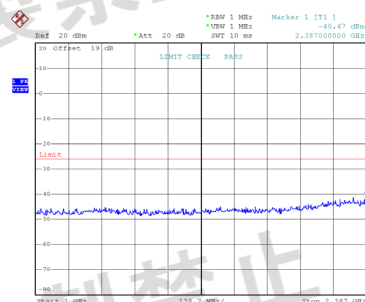


Date: 30.DEC.2025 11:31:33


※3: 2387MHz≤f<2400MHz

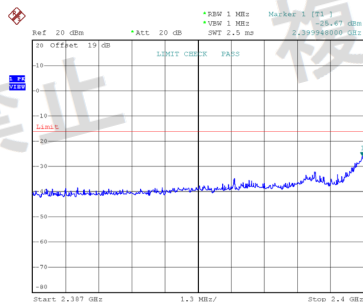

Date: 30.DEC.2025 11:29:14

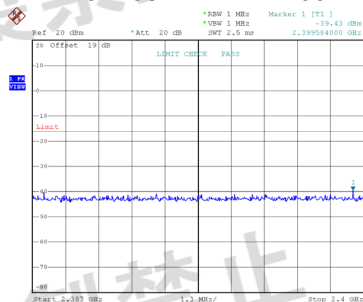


Date: 30.DEC.2025 11:30:31

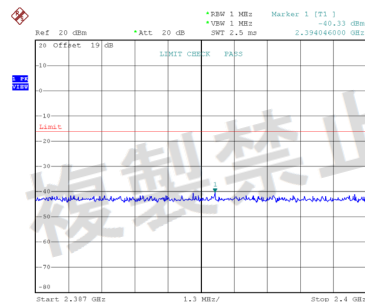


Date: 30.DEC.2025 11:31:43

CH01

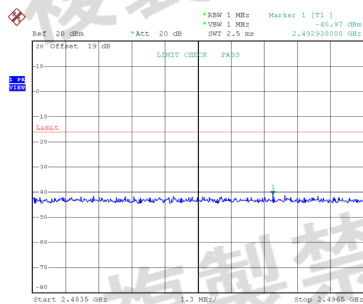


CH07


※4: 2483.5MHz<f≤2496.5MHz

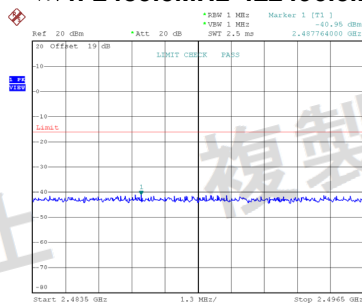




CH13

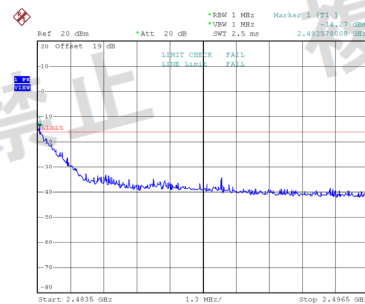

ZeroSP

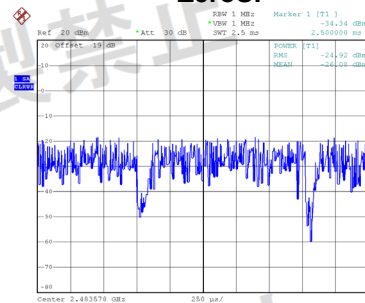

※5: 2496.5MHz<f

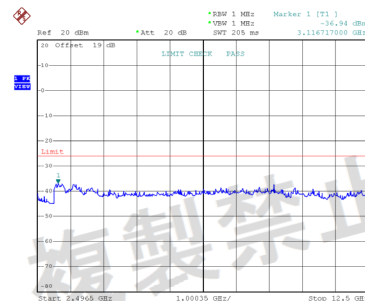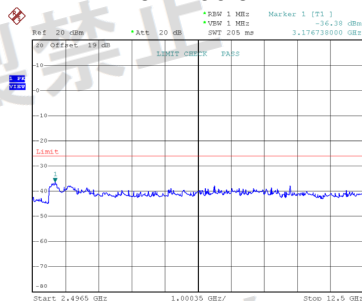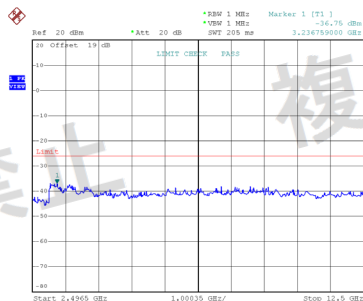

Test Mode:	TX Mode_ IEEE 802.11be(EHT40)
------------	-------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※1	MHz	707.06	996.12	784.66	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0557	0.0299	0.0355	
	※2	MHz	2362.03	2245.53	2331.52	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0570	0.0569	0.0555	
	※3	MHz	2399.97	2392.04	2390.77	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	1.6672	0.0778	0.0627	
	※4	MHz	2483.97	2489.01	2483.50	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	0.0647	0.0828	4.3652	
	※5	MHz	3156.73	3216.75	3076.70	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.1991	0.2786	0.2023	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH03

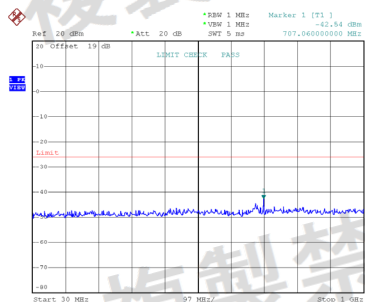


CH07




※1: 30MHz≤f<1000MHz

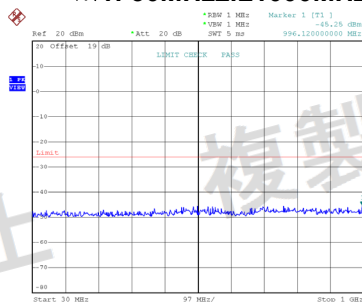




CH11

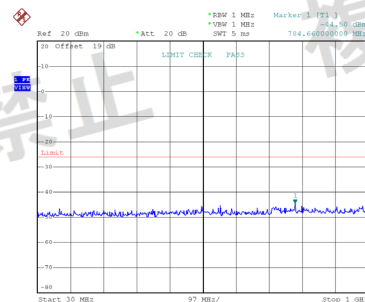




※2: 1000MHz≤f<2387MHz

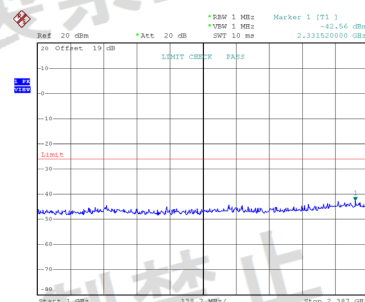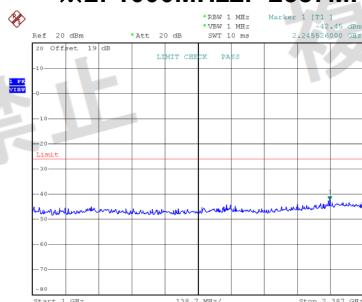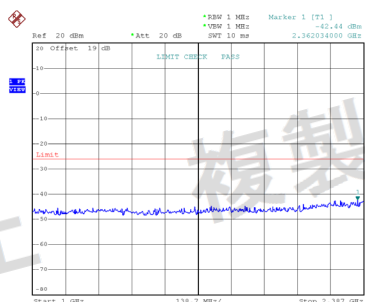


※3: 2387MHz≤f<2400MHz

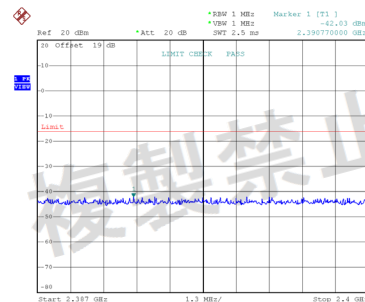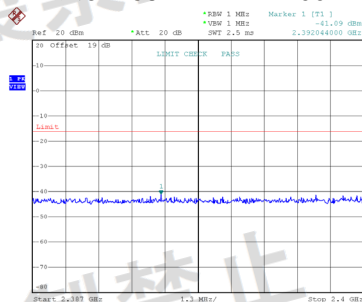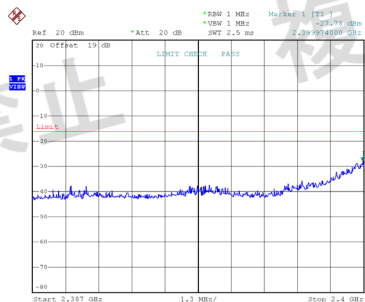

※4: 2483.5MHz<f≤2496.5MHz

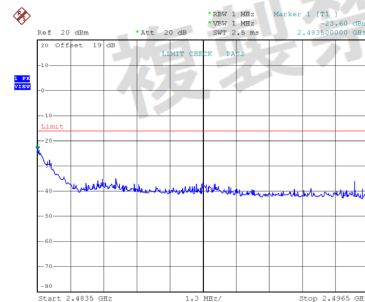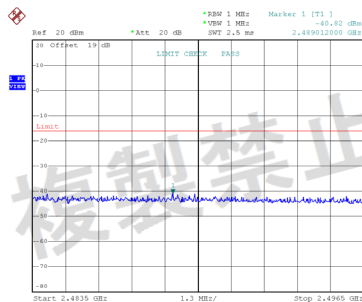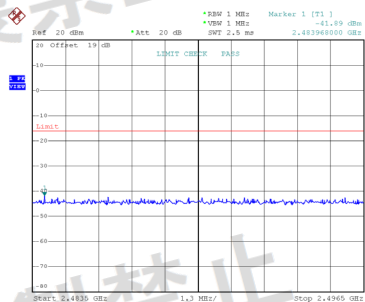


CH03

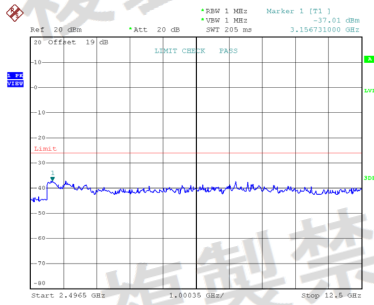


CH07

※5: 2496.5MHz<f

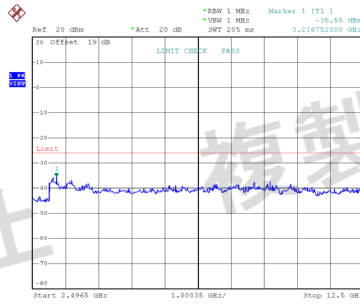

CH11

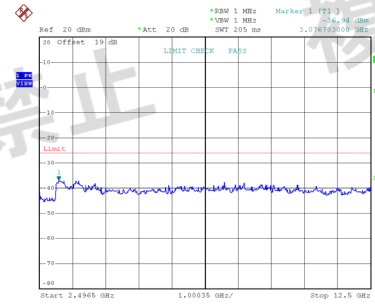

APPENDIX D - ANTENNA POWER TOLERANCE AND EIRP ANTENNA POWER

Test Mode:	TX Mode_IEEE 802.11b
------------	----------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2412	8.22	6.6374	7.26	10	-8.58	%
2442	8.16	6.5464	7.26	10	-9.83	%
2472	8.61	7.2611	7.26	10	+0.01	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2412	11.60	12.14
2442	11.54	12.14
2472	11.99	12.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11g
------------	----------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2412	8.34	6.8234	6.82	10	+0.05	%
2442	8.02	6.3416	6.82	10	-7.01	%
2472	8.16	6.5464	6.82	10	-4.01	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2412	11.72	12.14
2442	11.40	12.14
2472	11.54	12.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log(X)$
X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11n(HT20)
------------	----------------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2412	8.51	7.0958	7.10	10	-0.06	%
2442	8.32	6.7920	7.10	10	-4.34	%
2472	8.14	6.5148	7.10	10	-8.24	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2412	11.89	12.14
2442	11.70	12.14
2472	11.52	12.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log(X)$
X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11n(HT40)
------------	----------------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2422	5.27	3.3612	3.71	5	-9.40	%
2442	5.70	3.7145	3.71	5	+0.12	%
2462	5.60	3.6333	3.71	5	-2.07	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2422	8.65	9.14
2442	9.08	9.14
2462	8.98	9.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11ax(HE20)
------------	-----------------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2412	8.51	7.0941	7.09	10	+0.06	%
2442	8.45	7.0033	7.09	10	-1.22	%
2472	8.08	6.4224	7.09	10	-9.42	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2412	11.89	12.14
2442	11.83	12.14
2472	11.46	12.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log(X)$
X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11ax(HE40)
------------	-----------------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2422	5.47	3.5213	3.52	5	+0.04	%
2442	5.41	3.4754	3.52	5	-1.27	%
2462	5.28	3.3729	3.52	5	-4.18	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2422	8.85	9.14
2442	8.79	9.14
2462	8.66	9.14

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log(X)$
X = the total number of antennas

Test Mode: TX Mode_IEEE 802.11be(EHT20)

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2412	8.24	6.6681	6.71	10	-0.62	%
2442	8.24	6.6681	6.71	10	-0.62	%
2472	8.27	6.7143	6.71	10	+0.06	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2412	11.62	12.14
2442	11.62	12.14
2472	11.65	12.14

Note:

4. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%

5. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

6. Antenna Power value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log(X)$

X = the total number of antennas

Test Mode:	TX Mode_IEEE 802.11be(EHT40)
------------	------------------------------

Normal Voltage

Test Frequency	Conducted Antenna Power		Rated Antenna Power	Conducted Antenna Power Limit	Antenna Power Tolerance Limit	
(MHz)	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%)	
2422	5.51	3.5563	3.56	5	-0.10	%
2442	5.41	3.4754	3.56	5	-2.38	%
2462	5.22	3.3281	3.56	5	-6.51	%

Test Frequency	EIRP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)
2422	8.89	9.14
2442	8.79	9.14
2462	8.60	9.14

Note:

4. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
5. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
6. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

APPENDIX E - LIMITATION OF COLLATERAL EMISSION OF RECEIVER

Test Mode: RX Mode_ IEEE 802.11b

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Limitation of Collateral	※6	MHz	916.58	990.30	970.90	Limit ≤ 4 nW (-54 dBm)
		nW	0.0131	0.0142	0.0137	
Emission of Receiver	※7	MHz	3162.00	3116.00	3622.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.1167	0.1122	0.0851	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

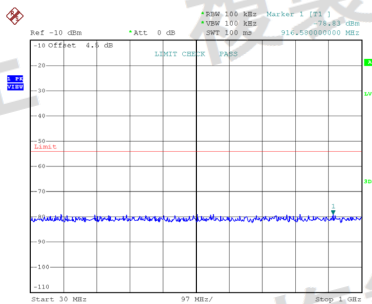

Date: 30,DEC,2025 13:20:54


CH07

※6: f<1GHz

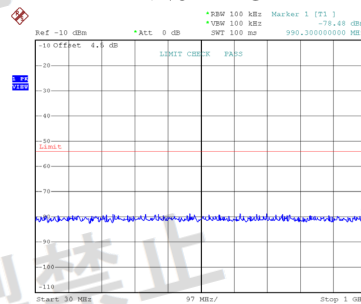


Date: 30,DEC,2025 13:22:28

CH13

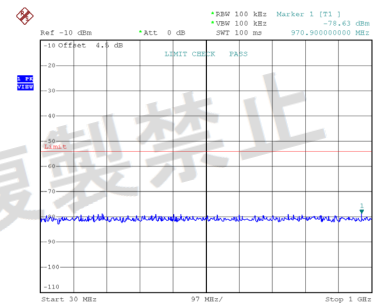


Date: 30,DEC,2025 13:22:52


※7: 1GHzzf

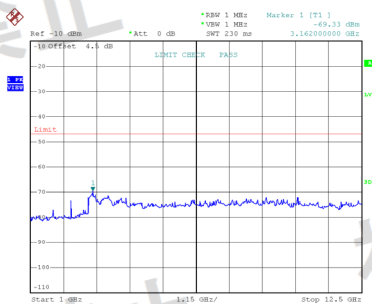

Date: 30,DEC,2025 13:21:23

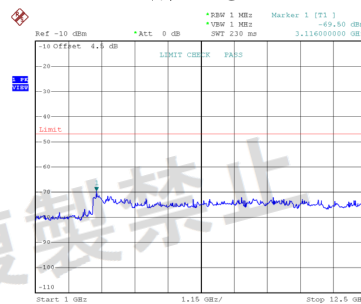

Date: 30,DEC,2025 13:22:39

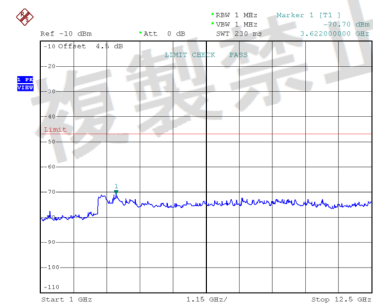

Date: 30,DEC,2025 13:23:02

Test Mode:	RX Mode_ IEEE 802.11g
------------	-----------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	90.14	798.24	474.26	Limit ≤ 4 nW (-54 dBm)
		nW	0.0152	0.0180	0.0155	
	※7	MHz	3185.00	3116.00	3093.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.1079	0.0873	0.0982	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

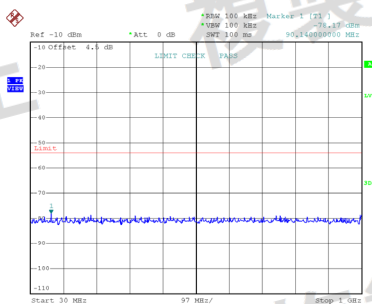

Date: 30.DEC.2025 13:23:16


CH07

※6: f<1GHz

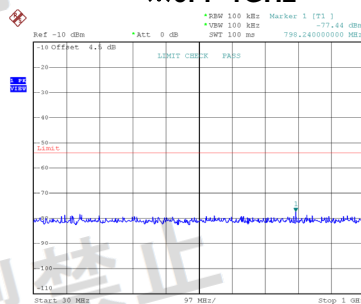


Date: 30.DEC.2025 13:24:16

CH13

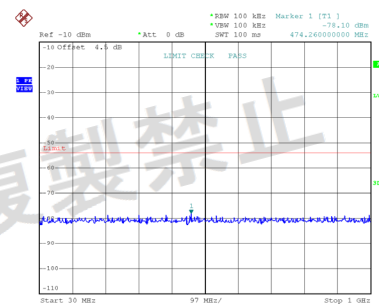


Date: 30.DEC.2025 13:30:56


※7: 1GHz≤f

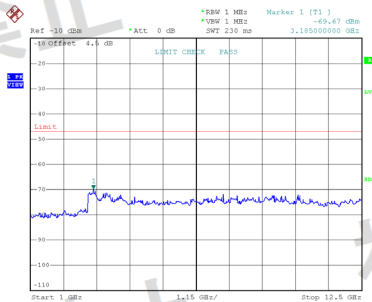

Date: 30.DEC.2025 13:23:26

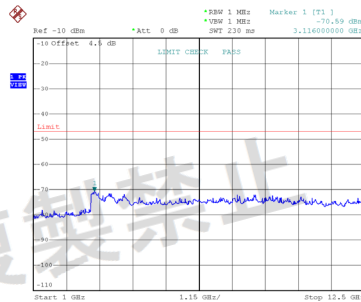

Date: 30.DEC.2025 13:24:26

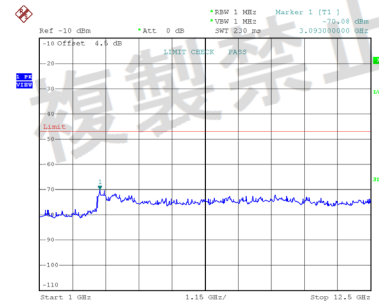

Date: 30.DEC.2025 13:31:06

Test Mode:	RX Mode_ IEEE 802.11n(HT20)
------------	-----------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	57.16	745.86	474.26	Limit ≤ 4 nW (-54 dBm)
		nW	0.0161	0.0141	0.0140	
	※7	MHz	3231.00	3185.00	3254.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.0953	0.1164	0.0959	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH01

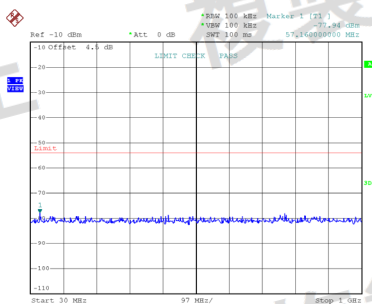


CH07




※6: f<1GHz

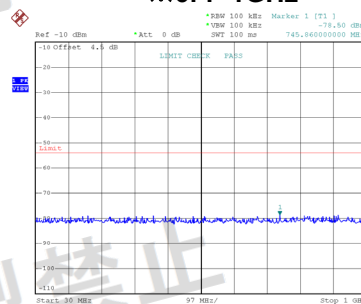

CH13

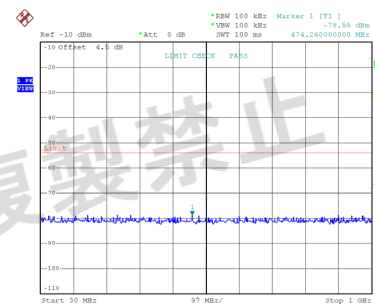

※7: 1GHz≤f

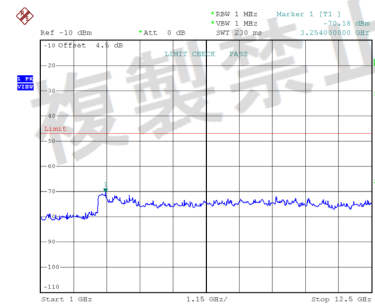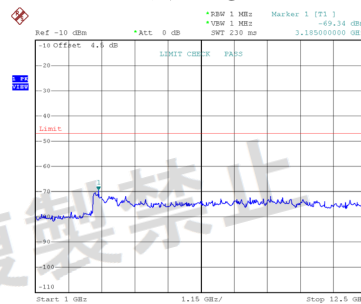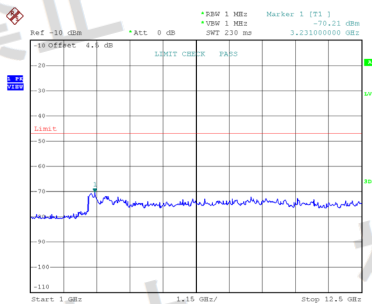

Test Mode:	RX Mode_ IEEE 802.11n(HT40)
------------	-----------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	88.20	419.94	454.86	Limit ≤ 4 nW (-54 dBm)
		nW	0.0137	0.0152	0.0139	
	※7	MHz	3024.00	3116.00	3139.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.0940	0.1005	0.0971	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH03

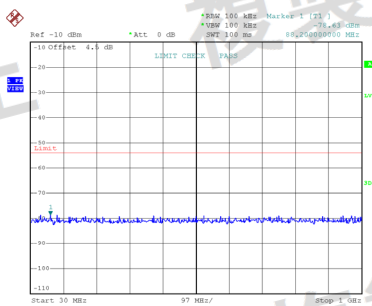

Date: 30.DEC.2025 13:33:16


CH07

※6: f<1GHz

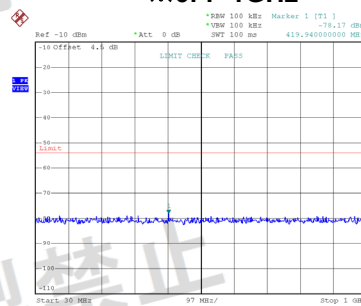


Date: 30.DEC.2025 13:33:53

CH11

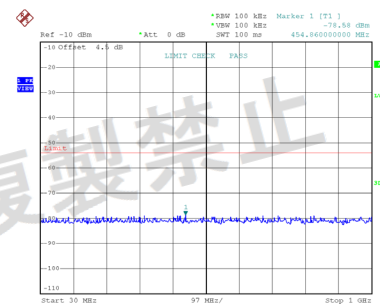


Date: 30.DEC.2025 13:34:45


※7: 1GHz≤f

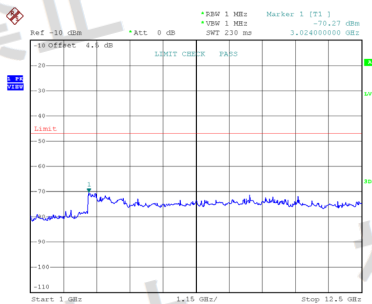

Date: 30.DEC.2025 13:33:26

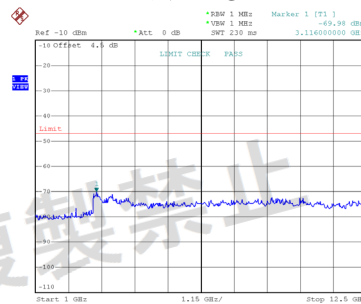

Date: 30.DEC.2025 13:34:03

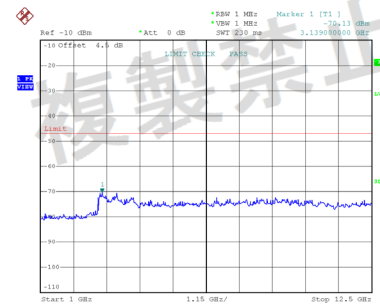

Date: 30.DEC.2025 13:34:55

Test Mode:	RX Mode_ IEEE 802.11ax(HE20)
------------	------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	43.58	404.42	557.68	Limit ≤ 4 nW (-54 dBm)
		nW	0.0144	0.0158	0.0151	
	※7	MHz	3139.00	3116.00	3231.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.0982	0.0857	0.1026	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

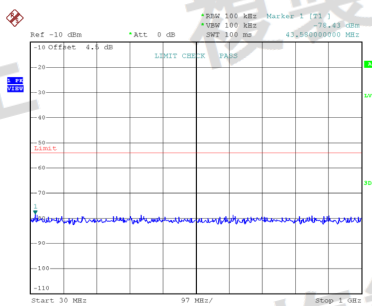

Date: 30.DEC.2025 13:16:18


CH07

※6: f<1GHz

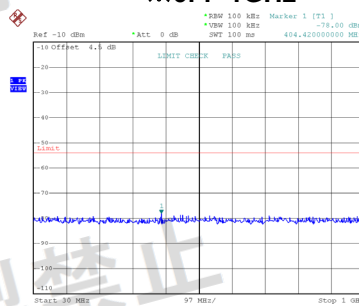


Date: 30.DEC.2025 13:16:40

CH13

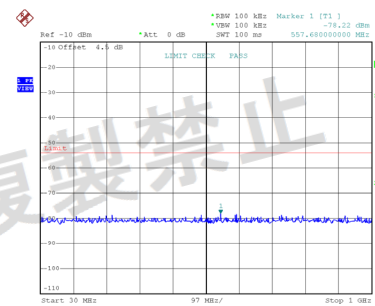


Date: 30.DEC.2025 13:17:25


※7: 1GHz≤f

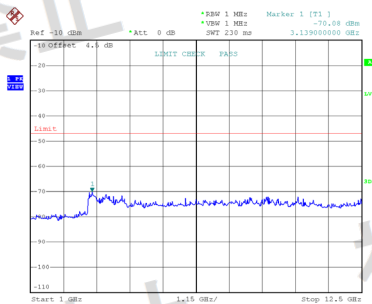

Date: 30.DEC.2025 13:16:29

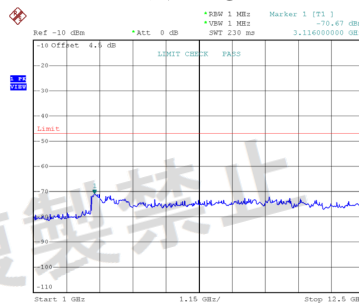

Date: 30.DEC.2025 13:16:51

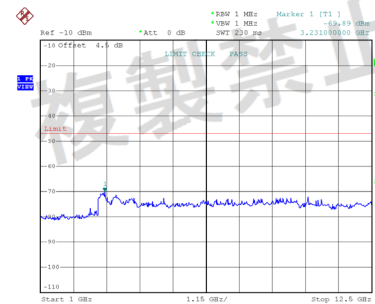

Date: 30.DEC.2025 13:17:35

Test Mode:	RX Mode_ IEEE 802.11ax(HE40)
------------	------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	621.70	379.20	210.42	Limit ≤ 4 nW (-54 dBm)
		nW	0.0136	0.0167	0.0139	
	※7	MHz	3231.00	3116.00	3139.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.1079	0.0822	0.0828	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH03

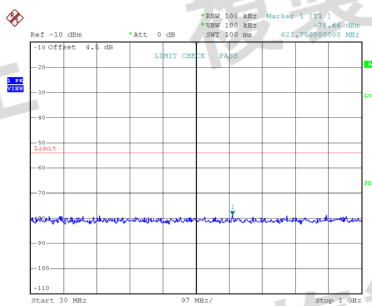

Date: 30.DEC.2025 13:18:01


CH07

※6: f<1GHz

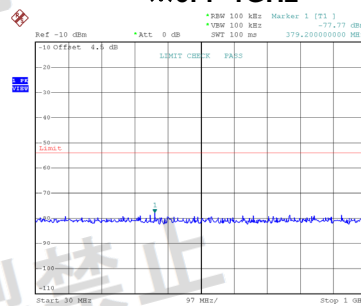


Date: 30.DEC.2025 13:41:22

CH11

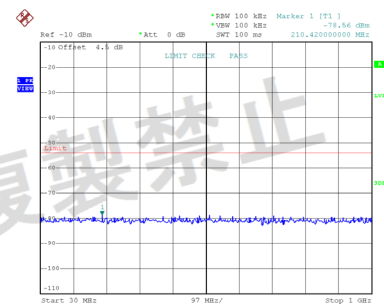


Date: 30.DEC.2025 13:41:44


※7: 1GHz≤f

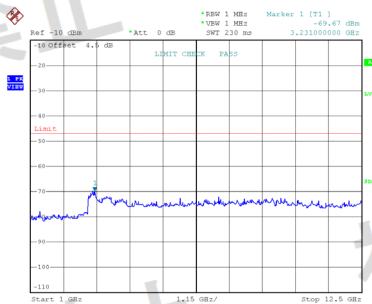

Date: 30.DEC.2025 13:18:11

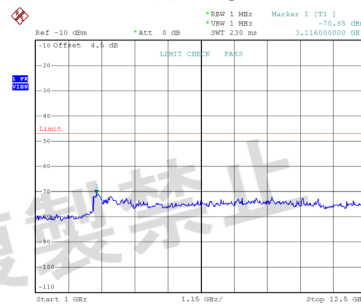

Date: 30.DEC.2025 13:41:33

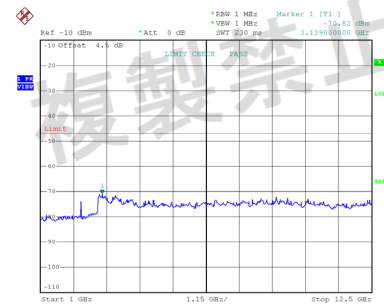

Date: 30.DEC.2025 13:41:55

Test Mode:	RX Mode_ IEEE 802.11be(EHT20)
------------	-------------------------------

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2412	2442	2472	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	57.16	807.94	870.02	Limit ≤ 4 nW (-54 dBm)
		nW	0.0155	0.0149	0.0160	
	※7	MHz	3139.00	3576.00	3070.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.1035	0.1112	0.0912	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH01

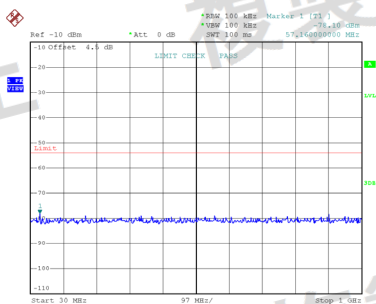

Date: 30.DEC.2025 13:42:25


CH07

※6: f<1GHz

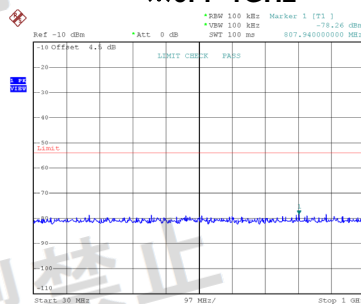


Date: 30.DEC.2025 13:42:47

CH13

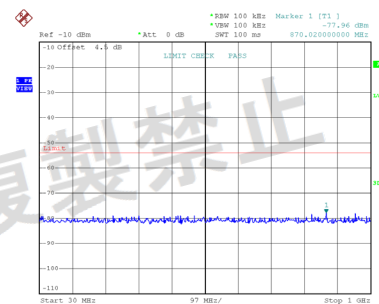


Date: 30.DEC.2025 13:46:24


※7: 1GHz≤f

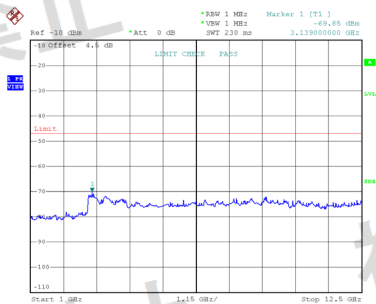

Date: 30.DEC.2025 13:42:35

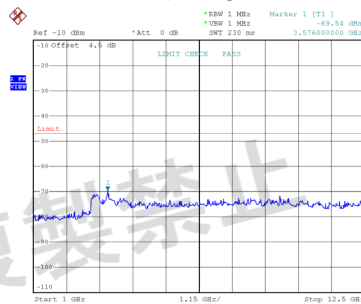

Date: 30.DEC.2025 13:42:57

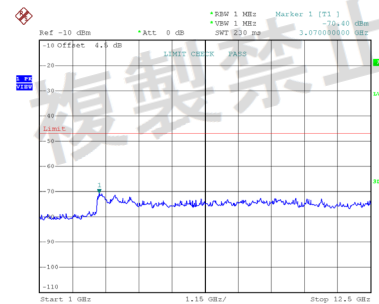

Date: 30.DEC.2025 13:46:34

Test Mode: RX Mode_ IEEE 802.11be(EHT40)

Test Voltage			Normal Voltage			Remarks
Test Frequency (MHz)			2422	2442	2462	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	825.40	381.14	827.34	Limit ≤ 4 nW (-54 dBm)
		nW	0.0188	0.0159	0.0148	
	※7	MHz	3185.00	3231.00	3070.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.0946	0.0824	0.0871	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)

X = the total number of antennas


CH03

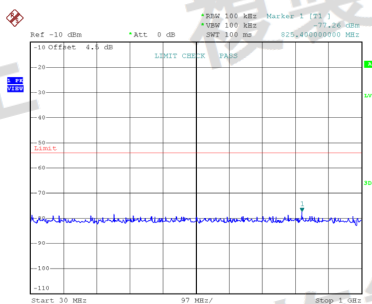

Date: 30.DEC.2025 13:47:31


CH07

※6: f<1GHz

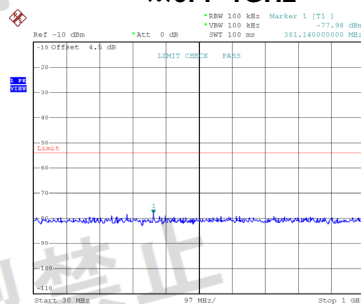


Date: 30.DEC.2025 13:53:55

CH11

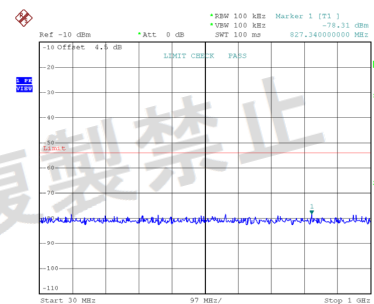


Date: 30.DEC.2025 13:55:14


※7: 1GHz≤f

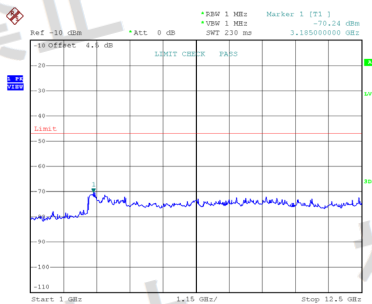

Date: 30.DEC.2025 13:47:41

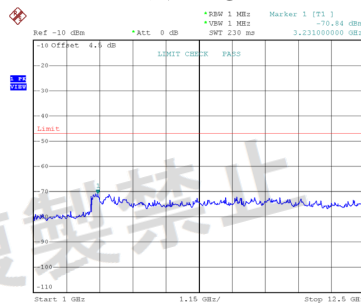

Date: 30.DEC.2025 13:54:05

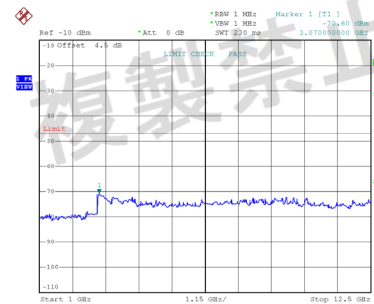

Date: 30.DEC.2025 13:55:24

End of Test Report