

QUICK INSTALLATION GUIDE

MAX APP BASED CELL KEYPAD

RESIDENTIAL / COMMERCIAL APPLICATION




Max Keypad

Overview	3
Entry gate application	4
Pedestrian door application	6
Setting up Max Cloud App	7
Setup a new gate site with App	8
Program Keypad greetings message.....	9
Program Keypad call button message	10
Add a new user on App	11
Program keycodes with restrictive times	12
Program timers	13
Cell date activation setup	14

APP BASED CELL KEYPAD




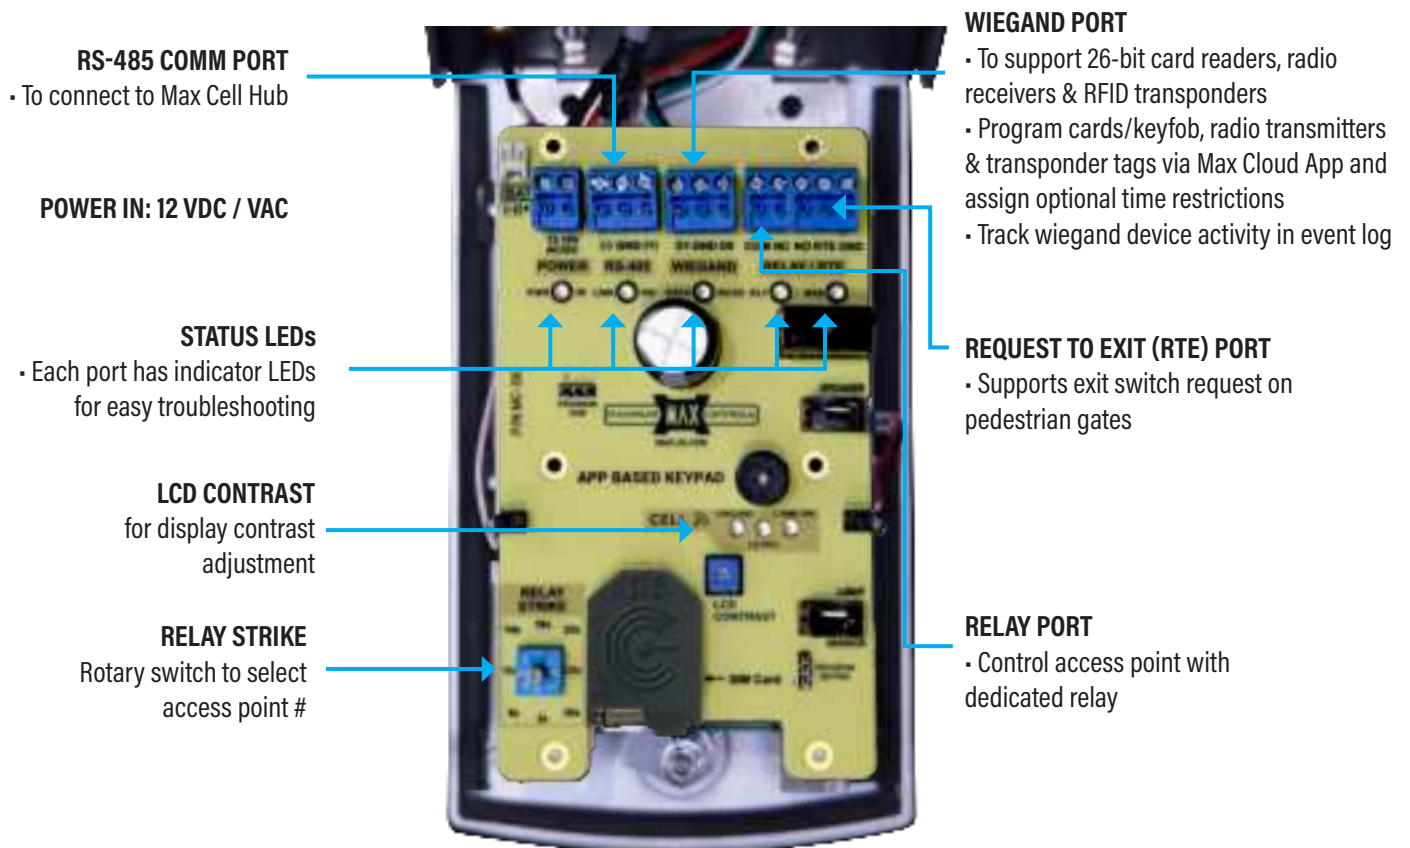



ENTRY GATE APPLICATION USING APP BASED KEYPAD

APP
BASED
KEYPAD

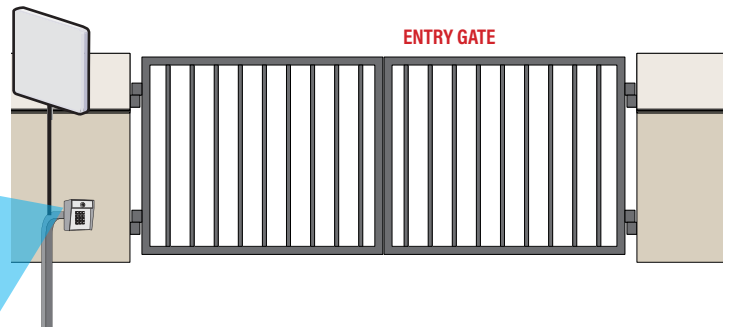

ENTRY GATE

4

Wiring Transponder Device

Install transponder device as shown

Transponder



Wiegand
Receiver

OR

1

Wiring Power Input

Connect 12VDC, 1A power transformer to **Power Input** port of Max Keypad (polarity does NOT matter)

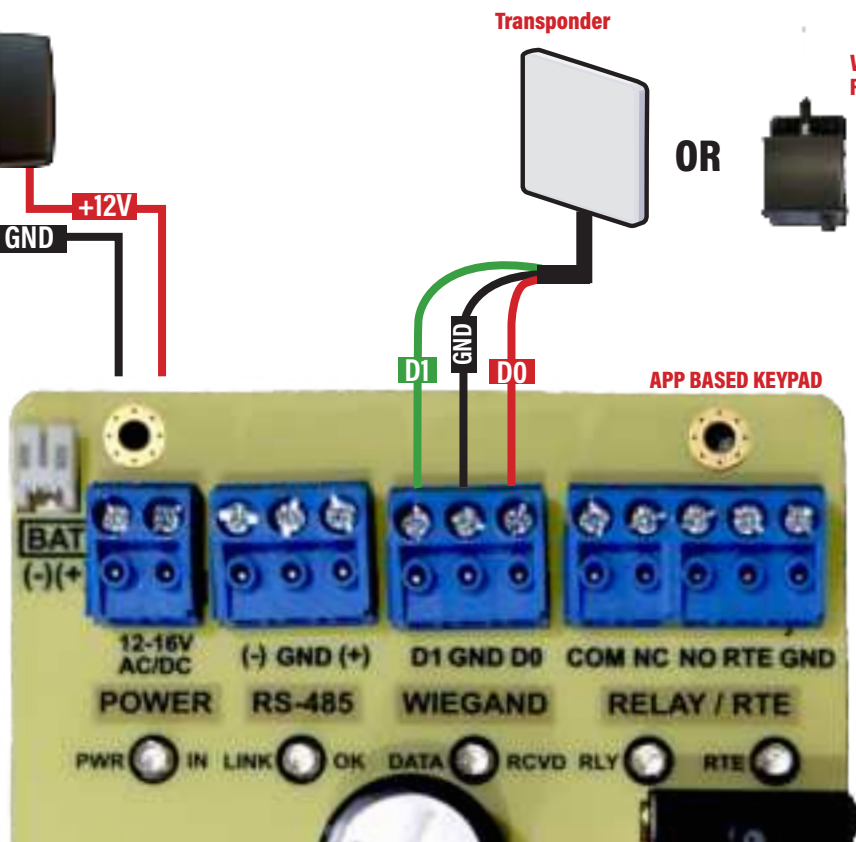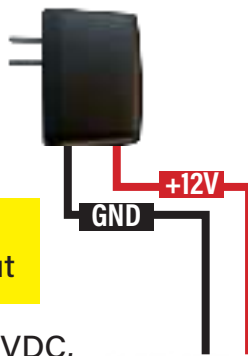

2

Select "RELAY STRIKE" using rotary switch


Select #0: to open gate via *Cell Hub* (note: keypad relay NOT activated)

Select #15: to open gate via *Cell Hub* (note: keypad relay is also activated)



2 Wiring Solenoid Lock

Install Solenoid Lock as shown below

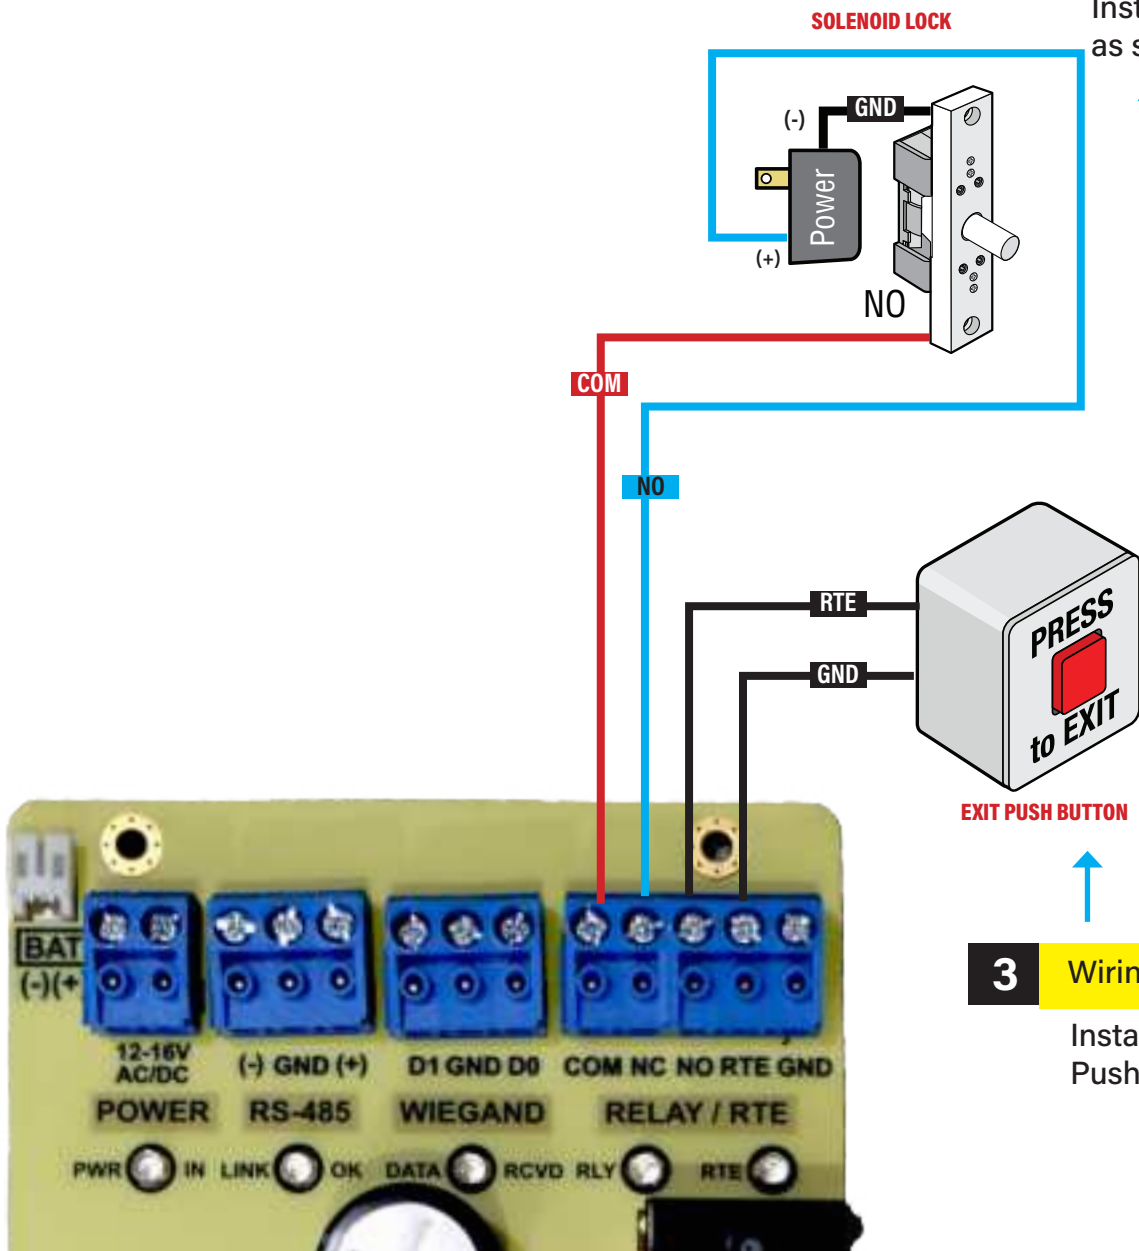


3 Wiring Exit Push Button

Install request to Exit Push Button as shown

4 Select "Realy Strike Tlme" using rotary switch

Select #2s-30s: to open gate using *Relay Strike*



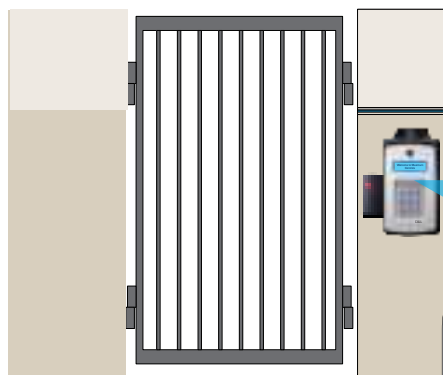


App
Based
Keypad



1 Wiring Power Input

Connect 12VDC, 1A power transformer to **Power Input** port of Max Keypad (polarity does NOT matter)

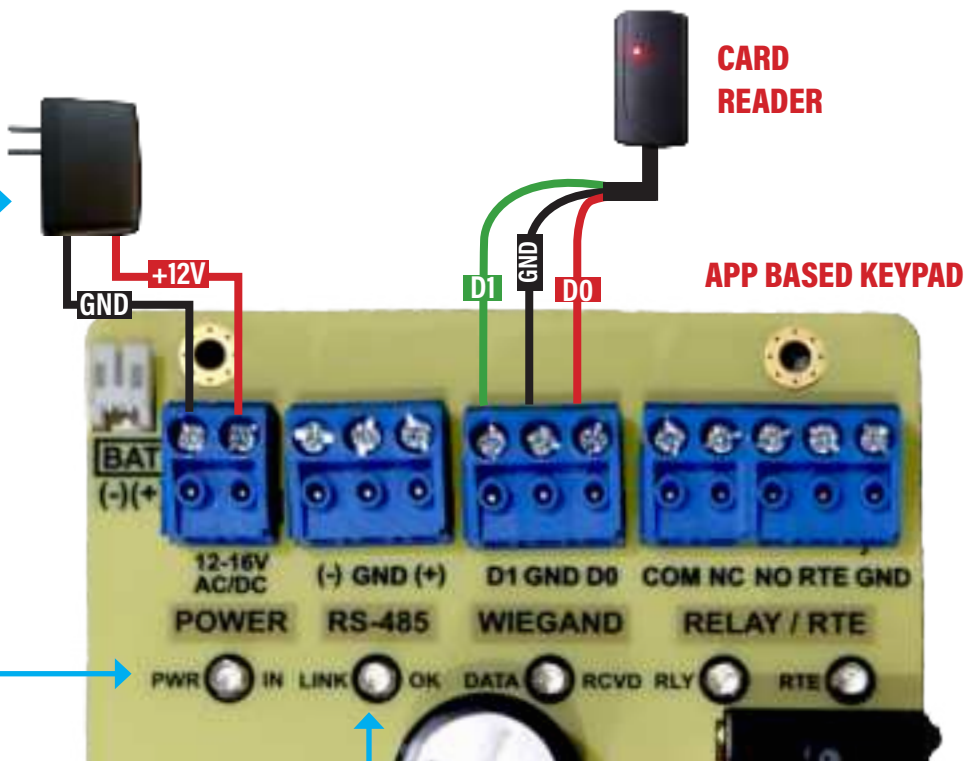

Verify POWER
LED is ON

Verify RS-485 LED turns ON
otherwise revise your wiring

1 Getting Max Cloud App

Max Cloud App is available for download on:



2 How to install Max Cloud App on **android phones**

1. Open the **Google Play Store** App in your phone.
2. Type Max Cloud App in the search bar
3. Tap the Install button.
4. Confirm the installation
5. Open Max Cloud App by clicking Max Cloud app icon

2.1 How to install Max Cloud App on **iphone**

1. Open the **App Store** in your iphone.
2. Type **Max Cloud App** in the search
3. The app will be shown below the search bar, press **GET** to download
- Confirm the installation
- Open Max Cloud App by clicking the Max Cloud App Icon

3 Max Cloud Login for the first time

1. Open the **Max Cloud app** in your phone.
2. Add a phone number then press **Login**.
Android phone does automatic verification




3. On **iphone** phone Max Cloud app will send you a code to verify your account. Enter the code and press **verify**, now you Max Cloud app is now ready.



1 Add a New Gate Site on App

Click on + **Add a Gate** icon in app

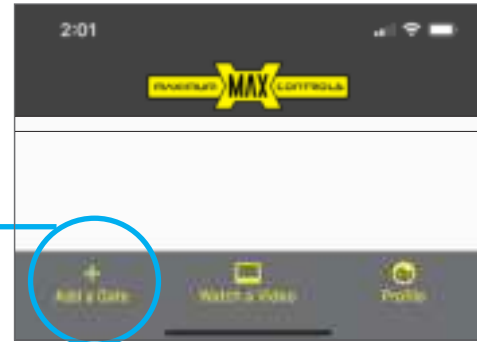

2 Setup gate site info

a.- Enter a site name

b.- Enter the IMEI# of the App Based Keypad




IMEI# is located on the inside of Max App Based Keypad



! Please double check your entry to ensure cell connectivity

3 Set up ADMIN for the gate site

Add the name and cell # of the person who will manage the gate site

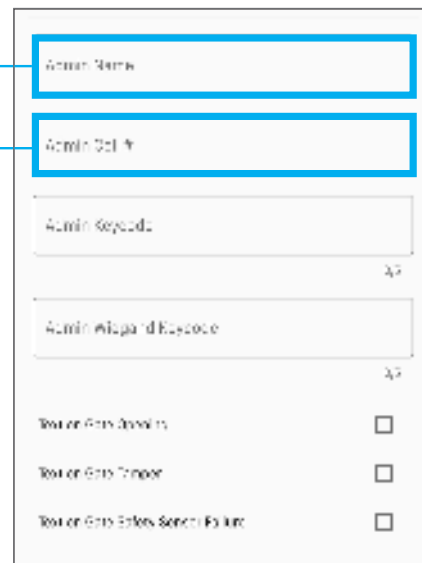

4 OPTIONAL Choose alert notifications

For manager to receive text alert for real time events


5 EXIT & SAVE changes

Press the **back button** [<] on the top left of the screen to confirm changes




6 Choose the new site from the list

- 1 Press **Settings** icon in the main menu

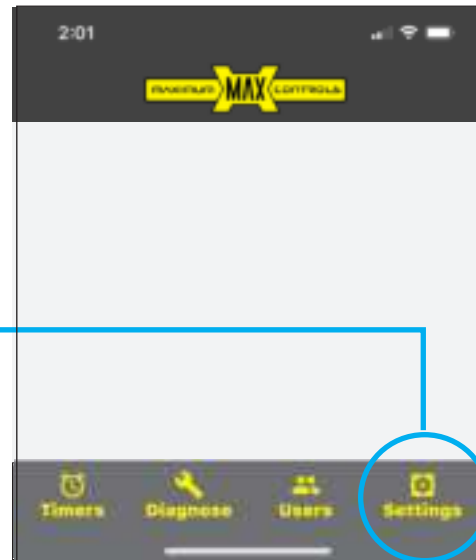

- 2 Setup greeting message

Go to the **GREETING** area and type the message you want to display for your visitors. Limited to 32 characters.

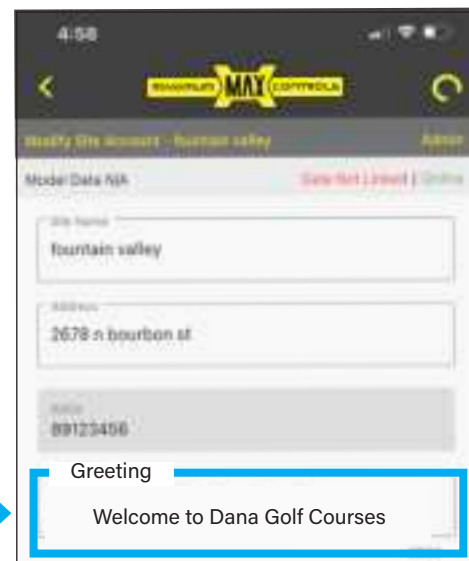


1 Setup Call Button

Go to the **Call Button** area and type the message that may instruct the visitor to call a specific phone number (i.e. facility manager or home owner) using their personal cell phone.
Example CALL button message: **"CALL (949) 000-0000 on your phone"**



When CALL button is pressed, display shows programmed message


CALL
Button

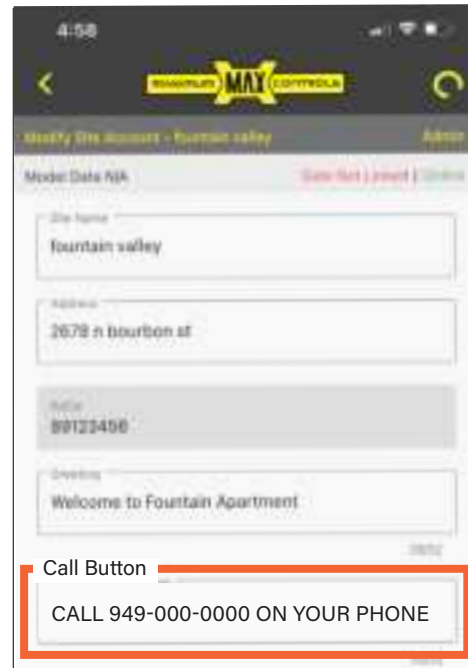


2 Press the **back button** [<] on the top left of the screen to confirm changes



1 Press **Users** icon in the main menu

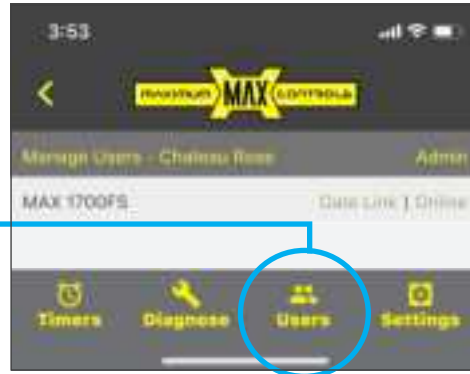

2 Then Press **Add a User** in the following menu

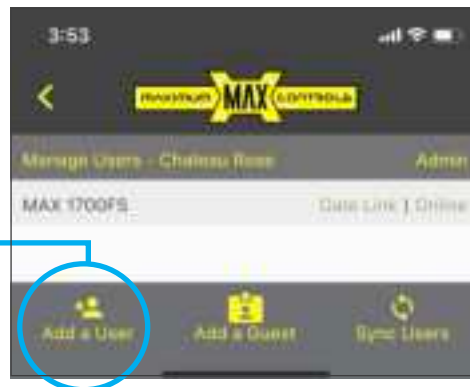

3 Enter **Name** of your visitor, then assign a **5 digit keycode**

4 Program Wiegand Keycode

If a Wiegand device is wired to keypad wiegand port then enter **Facility and Wiegand Keycode for the transmitter, keyfob or tag**


5 Assign a timer (OPTIONAL)

Choose one of six timer schedules

These time restrictions apply to both keycode and Wiegand keycode

If you choose No Timer
Keycode has no time restriction

6 Press the **back button** [<] on the top left of the screen to confirm create a user



Watch video tutorials from Max Cloud App, just go to the home screen


OR

SCAN CODE
to watch tutorial



Applying restrictive time period to keycodes improves the security to your gate site

- 1 Press **Timers** icon in the main menu

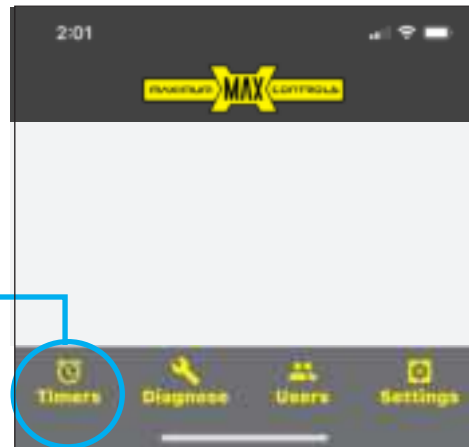

- 2 Choose the **Timer** option you want to setup from the list of timers



- 2 Choose the **Timer** option you want to setup from the list of timers



SCAN QR CODE TO:

Activate HUB's SIM card at
www.Max.us.com/products-cell-data-activation



1 Go to <https://max.us.com>



2 Press Max App on the main menu

Select **Max App Overview**
then select and click on
Cell Data Activation

3 Start watching the video tutorial

4 Go to **Cell Data Activation** Button

Will take you to our secure portal
<https://www.iotactivate.com/>
to fill important information to
register your account



Please have in hand the SIM Card (AT&T or Verizon) provided with Max App Based Keypad and IMEI#

 Please double check your entry to ensure cell connectivity



IMEI# is located on the inside
of Max App Based Keypad

5 Setting up account information

a.- Under Marketplace subscription plans choose as a provider

Maximum Controls

b.- Choose a subscription Plan

c.- Follow instructions on the site to complete set up your account information and submit

GETTING STARTED

IoT Activate 20M provides you with an elegant connectivity for connected product manufacturers. We are the fastest and easiest platform on the web to connect your devices now!

If you're already an IoT Activate subscriber, simply log into your account by clicking the login button.

If you're new to IoT Activate, you can start today by locating your Marketplace Vendor below and signing up for service. It's that EASY!

MARKETPLACE SUBSCRIPTION PLANS

Choose a subscription plan which best suits your needs. We offer a variety of options designed for low and high usage customers.

Subscription charges will be billed to your payment method on file.

USERNAME and PASSWORD

Please choose a username and password that you'll use to access your device account. Your username must be a valid email address that you can access.

Your password must be at least 8 characters in length, may contain numbers, letters, and a few reserved special characters: \$%^&* and !@#\$, but they are not required.

CREATE A SUBSCRIPTION PLAN

MAX Residential Connect Plan (10MB plan)
MAX Commercial Connect Plan (10MB plan)

Maximum Controls

Choose a subscription Plan

MAX Residential Connect Plan (10MB plan)
MAX Commercial Connect Plan (10MB plan)

USERNAME and PASSWORD

Please choose a username and password that you'll use to access your device account. Your username must be a valid email address that you can access.

Your password must be at least 8 characters in length, may contain numbers, letters, and a few reserved special characters: \$%^&* and !@#\$, but they are not required.

6 Enter your login info

Will take you to our secure portal
https://www.iotactivate.com,
enter username and password
then press login

LOGIN

Keep your username secret, do not write it down, and if you're ever prompted for any security details from our app or through e-mail exchange, do not share your login information.

If you need assistance at anytime, please feel free contact our support desk through the following link:
support@iotactivate.com

Your Email Address

Password

Login

7 Review SUBSCRIPTIONS

Review your data plan shown in the your Active Subscription Plans section

ACTIVE SUBSCRIPTIONS

Device	Subscription Plan	Start Date	End Date	Status	Plan
MAX Residential Connect Plan (10MB plan)	MAX Residential Connect Plan (10MB plan)	01-01-2020	01-01-2021	Active	10MB
MAX Commercial Connect Plan (10MB plan)	MAX Commercial Connect Plan (10MB plan)	01-01-2020	01-01-2021	Active	10MB

8

Activate SIM card

a.- Go to **My Services and Equipment** and **click over the plan and provider** you want to connect

b.- Go to **Activate a new subscription**

MAX COMMERCIAL (VERIZON) \$15.99 MONTHLY - 1 LINE(s)

MAX RESIDENTIAL CONNECT PLAN (10MB PLANS)

The MAX Residential Connect Plan is designed for vacation and primary residence gate security and provides for ample gate activity for the monthly fee of \$7.95 per active gate. Your gate can be activated on AT&T or VERIZON - whichever carrier your equipment is built for.

MAX RESIDENTIAL (AT&T) \$7.95 MONTHLY - 2 LINE(s)

ICCID (AT&T)	IMEI (AT&T)	START DATE	STATUS	NICKNAME
ACTIVATE A NEW MAX RESIDENTIAL (AT&T) \$7.95 MONTHLY SUBSCRIPTION HERE				
ICCID (AT&T)	IMEI (AT&T)		ACTIVATE	

* NOTE: Your activation is usually complete within 2-5 minutes.

c.- Enter the **ICCID** information located on the back of the SIM Card provided



d.- Enter the **IMEI#** that is ocated on the inside of Max App Based



Please double check your entry to ensure cell connectivity

d.- Press **ACTIVATE** button

MAX COMMERCIAL (VERIZON) \$15.99 MONTHLY - 1 LINE(s)

MAX RESIDENTIAL CONNECT PLAN (10MB PLANS)

The MAX Residential Connect Plan is designed for vacation and primary residence gate security and provides for ample gate activity for the monthly fee of \$7.95 per active gate. Your gate can be activated on AT&T or VERIZON - whichever carrier your equipment is built for.

MAX RESIDENTIAL (AT&T) \$7.95 MONTHLY - 2 LINE(s)

ICCID (AT&T)	IMEI (AT&T)	START DATE	STATUS	NICKNAME
ACTIVATE A NEW MAX RESIDENTIAL (AT&T) \$7.95 MONTHLY SUBSCRIPTION HERE				
678U99563	352753093240685		ACTIVATE	

* NOTE: Your activation is usually complete within 2-5 minutes.

e.- Review the status of your device; should show **ACTIVE**. In the event that shows **PENDING**, refresh your browser

MAX COMMERCIAL (VERIZON) \$15.99 MONTHLY - 1 LINE(s)

MAX RESIDENTIAL CONNECT PLAN (10MB PLANS)

The MAX Residential Connect Plan is designed for vacation and primary residence gate security and provides for ample gate activity for the monthly fee of \$7.95 per active gate. Your gate can be activated on AT&T or VERIZON - whichever carrier your equipment is built for.

MAX RESIDENTIAL (AT&T) \$7.95 MONTHLY - 2 LINE(s)

ICCID (AT&T)	IMEI (AT&T)	START DATE	STATUS	NICKNAME
678U99563	352753093240685	01/08/2020	ACTIVE	JAKE ATT #1


f.- Now your device is ready. Please **LOGOUT** on the top of the website

QUICK INSTALLATION GUIDE

MAX APP BASED KEYPAD

RESIDENTIAL / COMMERCIAL APPLICATION

APP BASED CELL KEYPAD

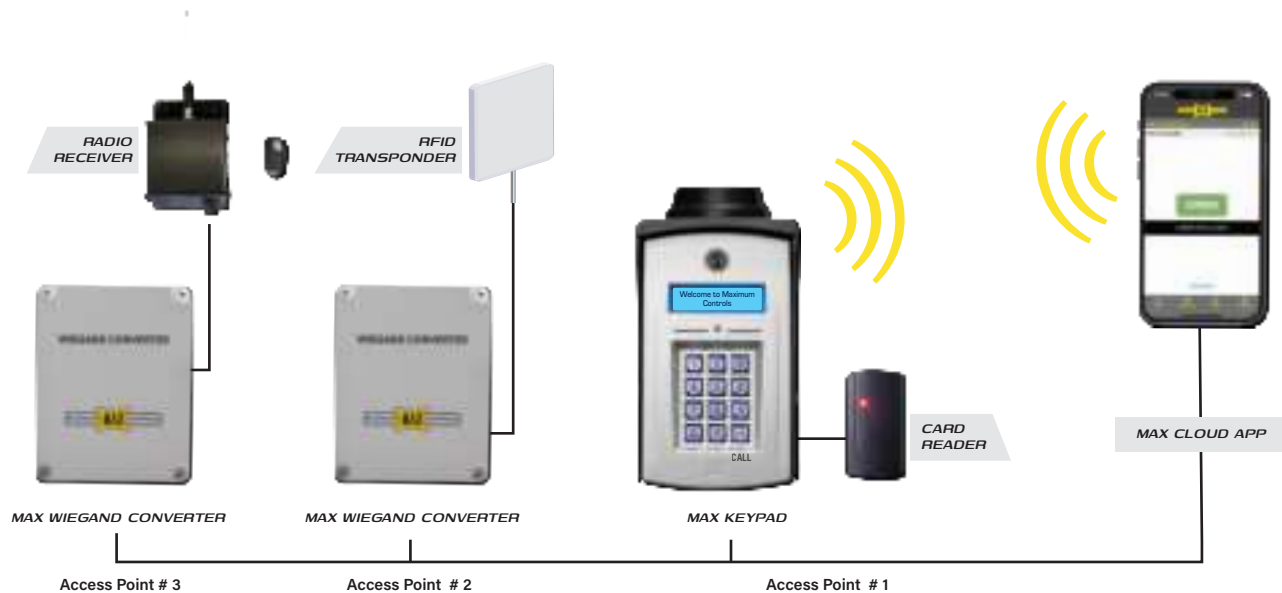

Key Features

-  **App Based Trackable Keypad**
-  **Affordable cell data plans (AT&T or Verizon)**
-  **16 Zone Control using Wiegand Converters**
-  **15 Wireless zone control (1 mile range / 900 MHz)
(with wireless Wiegand Converters)**
- COMING SOON**  **Push Notification for "Call" button pressed
or Visitor Motion Detected**
-  **Guest Pass with date and time restriction**
-  **Event Log of all transactions**



10530 Lawson River Ave., Fountain Valley, CA 92708
(949) 699-0220 | maxsales.us@gmail.com | MAX.US.COM