



低功率射頻電機-DFS 測試報告

Samsung SDS Co. Ltd.

器材名稱: Home Network Wall Pad

廠牌: SAMSUNG

型號: SHP-HB700W/TW

申請廠商 : Samsung SDS Co. Ltd.
125, Olympic-ro 35-gil, Songpa-gu, Seoul, Korea

測試實驗室 : 敦吉檢測科技股份有限公司電磁相容部
新北市林口區頂福里 53-11 號
電話: (02) 2609-9301~2, 2609-2133~5
傳真: (02) 2609-9309

受理日期 : 2019 年 11 月 06 日
案件編號 : C1M1911051
報告號碼 : EM-NC190254
測試日期 : 2019 年 11 月 14 日

TABLE OF CONTENTS

Description	Page
低功率射頻電機-DFS 測試報告	1
SUMMARY OF TEST RESULT	3
1.GENERAL INFORMATION	6
1.1.EUT Information	6
1.2.Product Information	6
1.3.Support Equipment.....	6
1.4.Standard Requirement	6
1.5.Measurement Uncertainty	6
2.TEST EQUIPMENT	7
3.WORKING MODES AND REQUIREMENT TEST ITEM.....	8
3.1.Applicability of DFS Requirements Prior To Use A Channel	8
3.2.Applicability of DFS Requirements During Normal Operation	8
4.DFS DETECTION THRESHOLD AND RADAR TEST WAVEFORMS	9
4.1.Interference Threshold Value, Master or Client Incorporating In-Service Monitoring	9
4.2.Radar Test Waveform Minimum Step	9
4.3.Short Pulse Radar Test Waveforms	10
4.4.Long Pulse Radar Test Waveforms.....	11
4.5.Frequency Hopping Pulse Radar Test Waveforms	13
4.6.Conducted Calibration Setup	15
4.7.Radar Waveform Calibration Procedure	15
4.8.Calibration Deviation	15
4.9.Radar Waveform Calibration Result	16
5.TEST SETUP AND TEST RESULT	17
5.1.Test Setup.....	17
5.2.Channel Move Time, Channel Closing Transmission Time, Non-Occupancy Period, Non-Associated Client Beacon Measurement.....	19
5.3.Test Result.....	20
6.USER ACCESS RESTRICTION	21
附錄一受測裝置之測試結果	
附錄二受測裝置之測試照片	

低功率射頻電機-DFS 測試報告

受理日期：2019年11月06日
 完成日期：2019年11月18日
 報告號碼：EM-NC190254
 實驗室名稱：敦吉檢測科技股份有限公司電磁相容部
 實驗室地址：新北市林口區頂福里53-11號
 實驗室電話：(02) 2609-9301, (02) 2609-2133
 認可編號及範圍：TAF 1724 (9kHz-40GHz)
 申請廠商：Samsung SDS Co. Ltd.
 製造廠商：Samsung SDS Co. Ltd.
 器材名稱：Home Network Wall Pad
 廠牌：SAMSUNG
 型號：SHP-HB700W/TW
 工作頻率/發射功率：



無線技術		工作頻率(MHz)	頻道數	發射功率(dBm)	
				峰值 (Peak)	平均值 (Average)
ZigBee		2405-2480	16	9.54	---
802.11b		2412-2462	11	19.08	16.24
802.11g		2412-2462	11	22.82	14.80
802.11n-HT20		2412-2462	11	22.76	14.47
802.11a	UNII Band I	5180-5240	4	---	16.25
	UNII Band II	5260-5320	4	---	15.99
	UNII Band III	5500-5700	8	---	15.73
	UNII Band IV	5745-5825	11	---	16.40
802.11n-HT20	UNII Band I	5180-5240	4	---	15.78
	UNII Band II	5260-5320	4	---	16.05
	UNII Band III	5500-5700	11	---	15.81
	UNII Band IV	5745-5825	5	---	16.44
802.11n-HT40	UNII Band I	5190-5230	2	---	16.08
	UNII Band II	5270-5310	2	---	15.93
	UNII Band III	5510-5670	5	---	15.86
	UNII Band IV	5755-5795	2	---	16.39
UNII Band II & III [DFS Function-Slave (Without radar detection function)]					

調變方式 :

無線技術	調變方式
Zigbee	DSSS (O-QPSK)
802.11b	DSSS (DBPSK/ DQPSK/ CCK)
802.11a/g/n-HT20/n-HT40	OFDM (BPSK/ QPSK/ 16QAM/ 64QAM)

天線規格 : 此裝置使用固定式天線，其天線資料如下:

天線類型		廠牌	型號(Part No)	頻率(MHz)	天線增益(dBi)
WLAN	PCB Antenna	LISOTEK	TP-WDS-87	2400-2485	4.043
				5150-5875	6.192
Zigbee	PCB Antenna	LISOTEK	TP-ZSS-88	2400-2485	0.585

註:天線已符合NCC低功率射頻電機技術規範2.2.節之規定

備註 : 1.本試驗符合性判定之決定規則不另外考慮量測不確定度。

2. 本測試報告僅對受測之樣品負責。

3. 非經本公司同意，測試報告不得摘錄複印使用。(全部複製除外)

4. 本產品適用低功率射頻電機技術規範LP0002(修訂日期2018年01月10日)。

5. 此份報告是針對 UNII Band II、III 之 DFS 功能進行製作，

至於 2.4GHz 及 Zigbee 功能於報告號碼(EM-NC190252)。

至於 UNII Band I、II、III、IV 功能於報告號碼(EM-NC190253)。

SUMMARY OF TEST RESULT

Description of Test Item	Standard	Results
Channel Availability Check Time	NCC LP0002-Section 4.7.7.2 (2)(A)	N/A
Channel Move Time	NCC LP0002-Section 4.7.7.2 (4)	PASS
Channel Closing Transmission Time	NCC LP0002-Section 4.7.7.2 (4)	PASS
Non-Occupancy Period	NCC LP0002-Section 4.7.7.2 (5)	PASS

報告簽署人：薛舜誠 2019.12.02
(薛舜誠/課長)

審查人員：吳俊澤 2019.12.2
(吳俊澤/主任)

1. GENERAL INFORMATION

1.1. EUT Information

- a) Product : Home Network Wall Pad
- b) Brand : SAMSUNG
- c) Model Name : SHP-HB700W/TW
- d) Power Supply : (1) DC 12V (Adapter)
(2) DC 17-24V (UPS)
- e) Test Voltage : AC 110V/60Hz (Via AC Adapter)

1.2. Product Information

1.2.1. This EUT is support 802.11a/b/g/n 、ZigBee (IEEE 802.15.4) and DFS Function-Slave (Without radar detection function).

1.2.2. The max data rate of EUT as below list:

Mode	The max data rate of EUT (Mbps)
ZigBee	0.25
802.11b/g	11
802.11a	54
802.11n-HT20	72.2
802.11n-HT40	150

1.3. Support Equipment

Item	Manufacturer	Model	Remark
AP Server	ASUS	RT-AX88U	NCC: CCAF18LP1530T1

1.4. Standard Requirement

NCC LP0002 (2018.01.10) 4.7.7.2: U-NII devices operating in the 5.25 ~ 5.35 GHz and 5.47 ~ 5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. EUT is Client device without radar detection function.

1.5. Measurement Uncertainty

Test Item	Uncertainty
DFS Measurement	±0.5ms
Threshold	±0.33dB

2. TEST EQUIPMENT

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1	Vector Signal Generation	R&S	SMU200A	104893	2019. 06. 18	1 Year
2	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2019. 06. 12	1 Year
3	Spectrum Analyzer	R&S	FSV30	101181	2019. 07. 18	1 Year
4	Attenuator (10dB) X2	Worken	WK0602-10	0120A02208001S	N.C.R	N.C.R
5	Attenuator (30 dB) X2	Worken	WK0602-30	0120A02208002S	N.C.R	N.C.R

3. WORKING MODES AND REQUIREMENT TEST ITEM

3.1. Applicability of DFS Requirements Prior To Use A Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required

3.2. Applicability of DFS Requirements During Normal Operation

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓

4. DFS DETECTION THRESHOLD AND RADAR TEST WAVEFORMS

4.1. Interference Threshold Value, Master or Client Incorporating In-Service Monitoring

Maximum Transmit Power	Value (See Notes 1 and 2)
≥ 200 milliwatt	-64dBm
< 200 milliwatt	-62dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

The radar Detection Threshold, lowest antenna gain is the parameter of interference radar DFS detection threshold.

The interference Detection Threshold is -62dBm

4.2. Radar Test Waveform Minimum Step


Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

4.3. Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulse	Minimum Percentage of Successful Detection	Minimum number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar type 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

FCC Radar Types (1 ~4) System Diagram

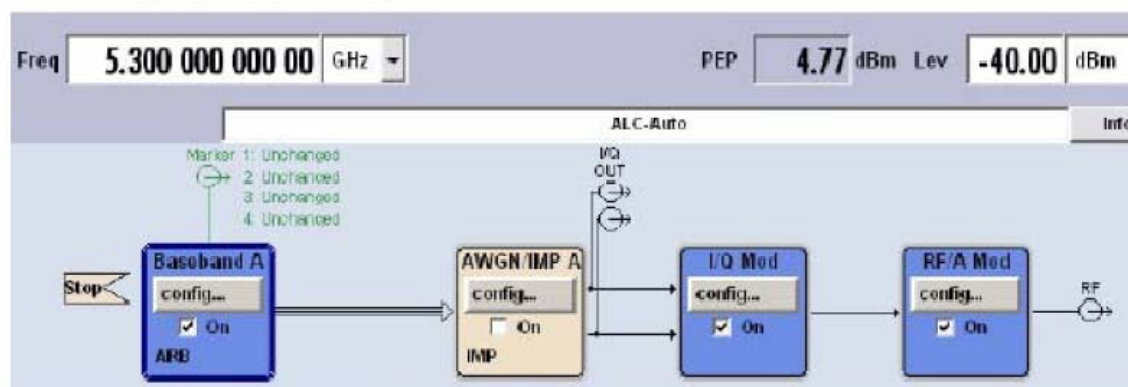

Used R&S SMU200A (Vector SG with two ARB)

B11: Base-band Generator with ARB (16M samples) and Digital Modulation

B13: Base-band Main Module

B106: frequency range (100 kHz to 6 GHz)

For selecting the waveform parameters from within the bounds of the signal type, system was random selection using uniform distribution.

4.4. Long Pulse Radar Test Waveforms


Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulse Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as following:


- (1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- (2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- (3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- (4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- (5) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- (6) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12000000/\text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12000000/\text{Burst_Count})-(\text{Total Burst length})+(\text{One Random PRI interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- (1) The total test signal length is 12 seconds.
- (2) 8 Bursts are randomly generated for the Burst_Count.
- (3) Burst 1 has 2 randomly generated pulses.
- (4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- (5) The PRI is randomly selected to be at 1213 microseconds.
- (6) Bursts 2 through 8 are generated using steps 3-5.
- (7) Each Burst is contained in even intervals of 1500000 microseconds. The starting location for Pulse 1. Burst 1 is randomly generated (1 to 1500000 minus the total Burst 1 length + 1 random PRI interval) at the 325001 microsecond step. Bursts 2 through 8 randomly fall in successive 1500000 microsecond intervals (i.e. Burst 2 falls in the 1500001-3000000 microsecond range).

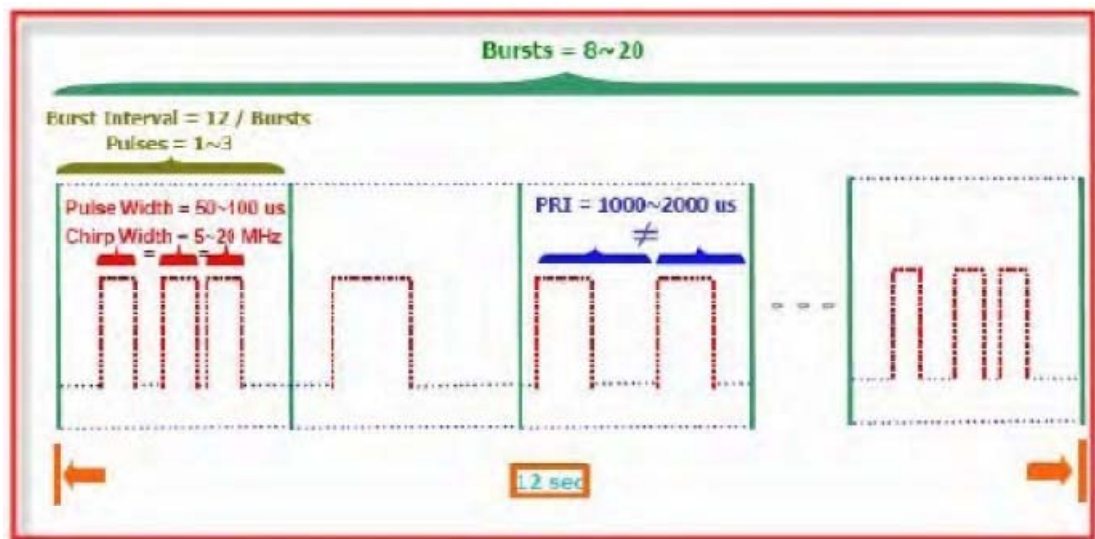

FCC Radar Types (5) System Diagram

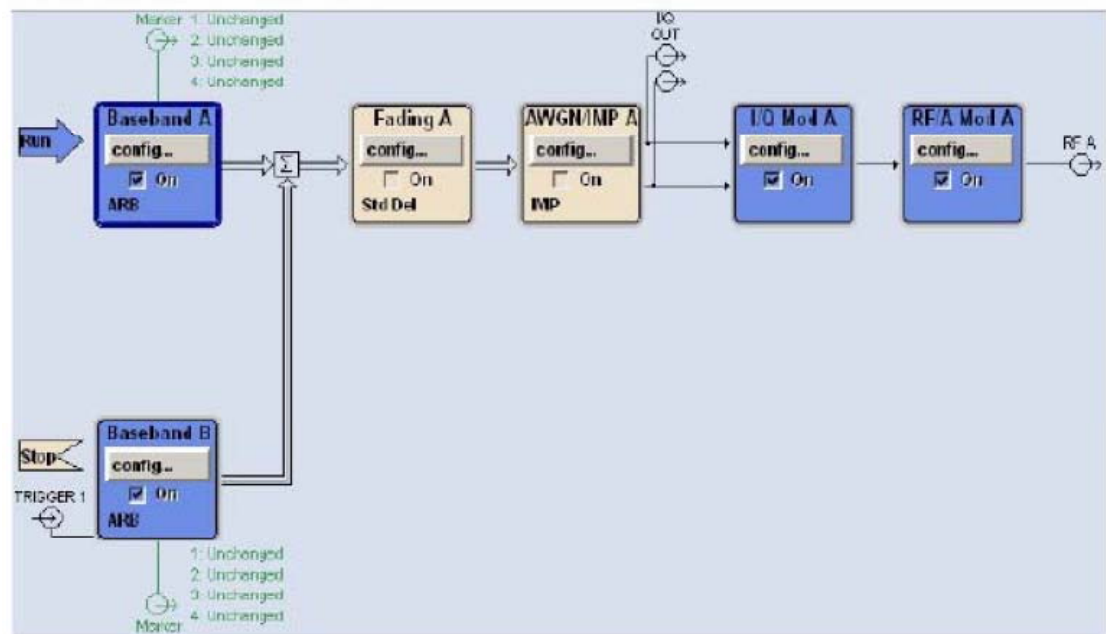

Used R&S SMU200A (Vector SG with two ARB)

Path A/Path B Two B11: Base-band Generator with ARB (16M samples) and Digital Modulation

B13: Base-band Main Module

B106: frequency range (100 kHz to 6 GHz)


For selecting the waveform parameters from within the bounds of the signal type, system was random selection using uniform distribution.

4.5. Frequency Hopping Pulse Radar Test Waveforms


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies form 5250-5274MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of random frequency, the frequencies remaining within the group are always treated as equally likely.

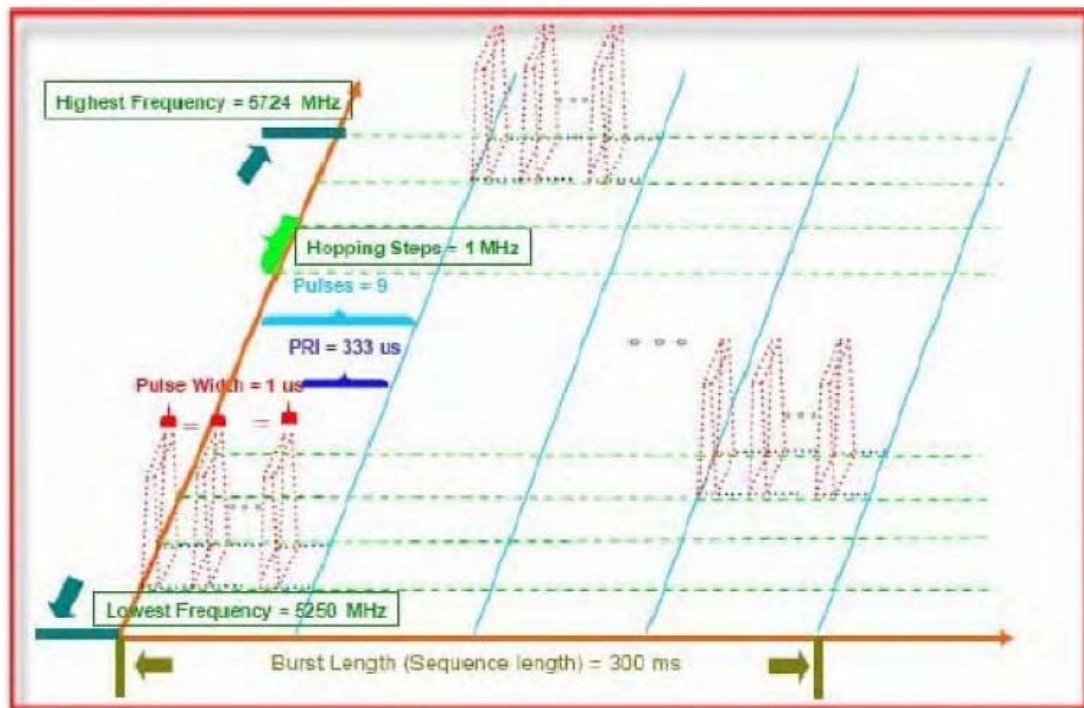

FCC Radar Types (6) System Diagram

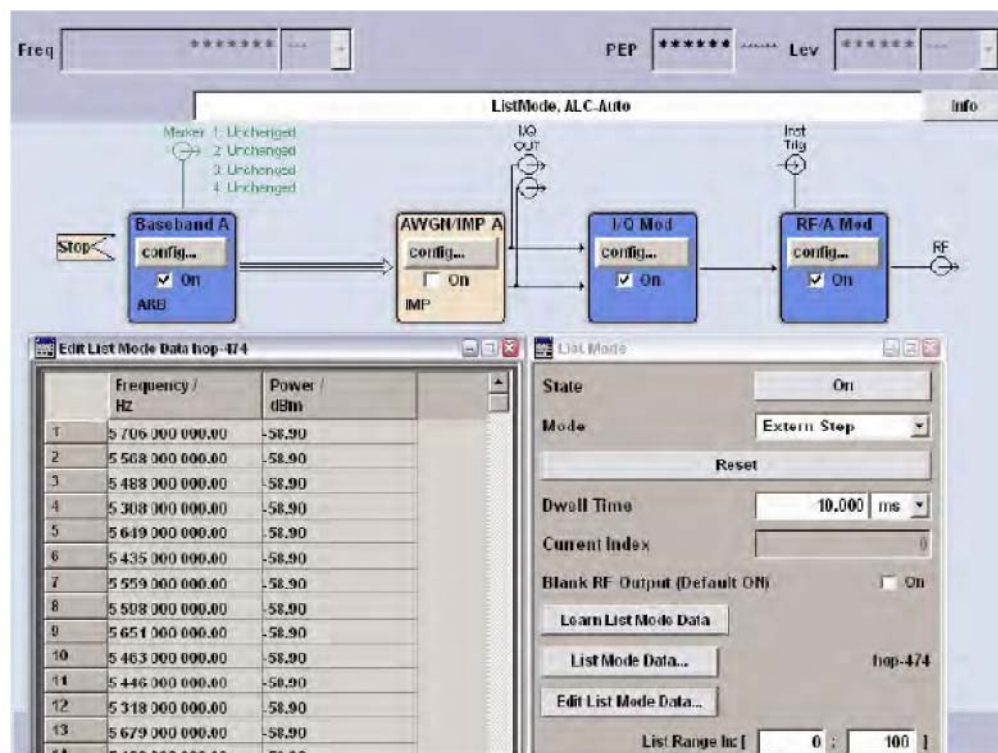

Used R&S SMU200A (Vector SG with two ARB)


B11: Base-band Generator with ARB (16M samples) and Digital Modulation

B13: Base-band Main Module

B106: frequency range (100 kHz to 6 GHz)

For selecting the waveform parameters from within the bounds of the signal type, system was random selection using uniform distribution.

4.6. Conducted Calibration Setup

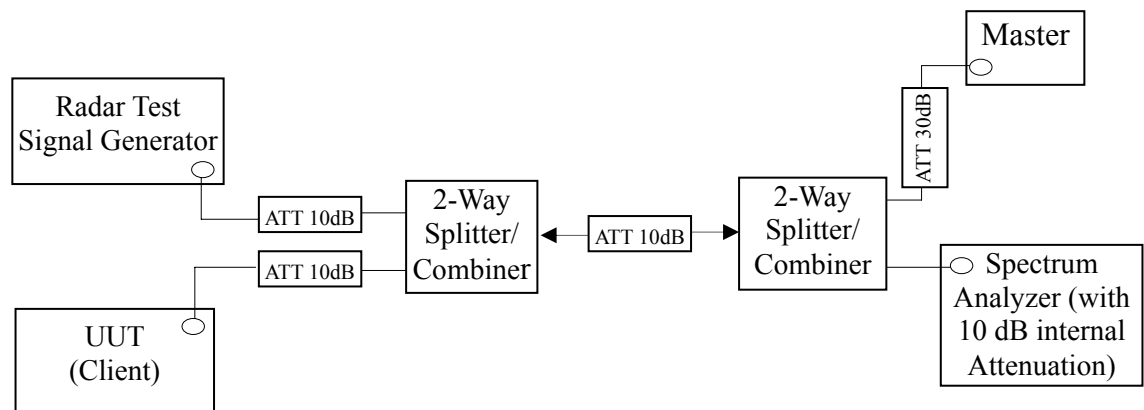

4.7. Radar Waveform Calibration Procedure


The measured channel is 5250MHz. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The calibrated conducted detection threshold level is set to -62dBm. The tested level is lower than required level hence it provides margin to the limit.

4.8. Calibration Deviation

There is no deviation with the original standard.

4.9. Radar Waveform Calibration Result

DFS detection threshold level and the burst of pulses on the Channel frequency
40MHz

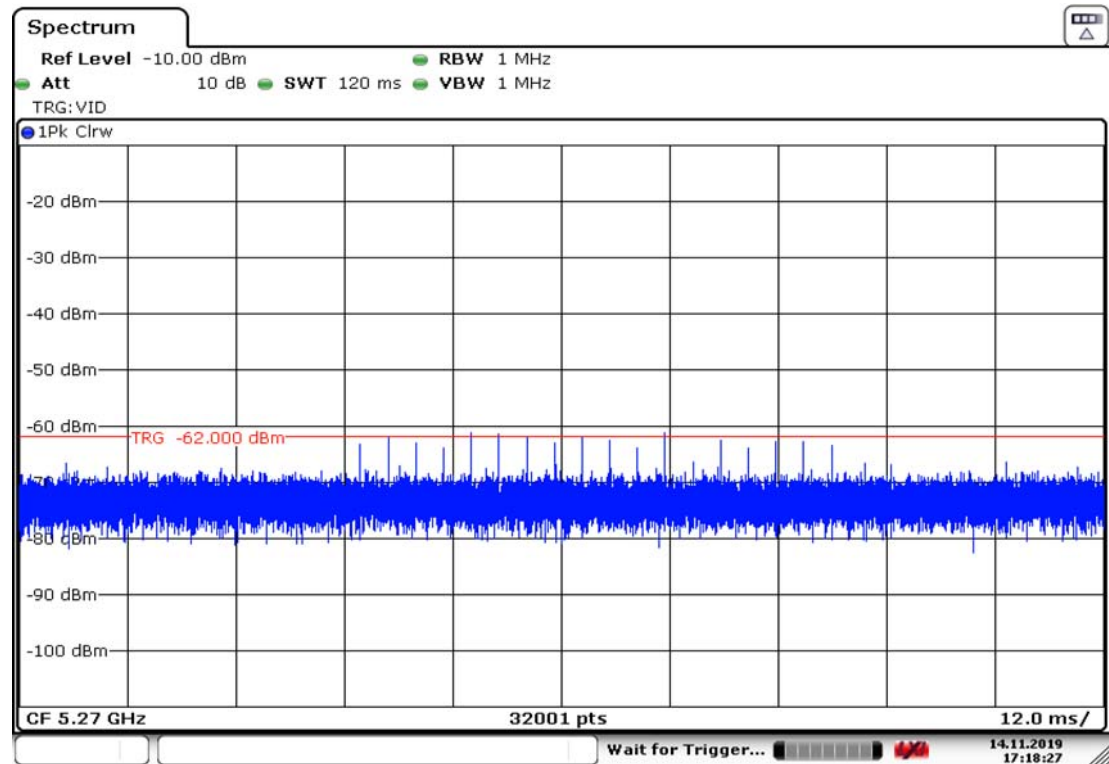


Date: 14.NOV.2019 17:18:27

5. TEST SETUP AND TEST RESULT

5.1. Test Setup

5.1.1. Test Setup Diagram

Following is the test setup for generated the radar waveforms and used to monitor UNII device.

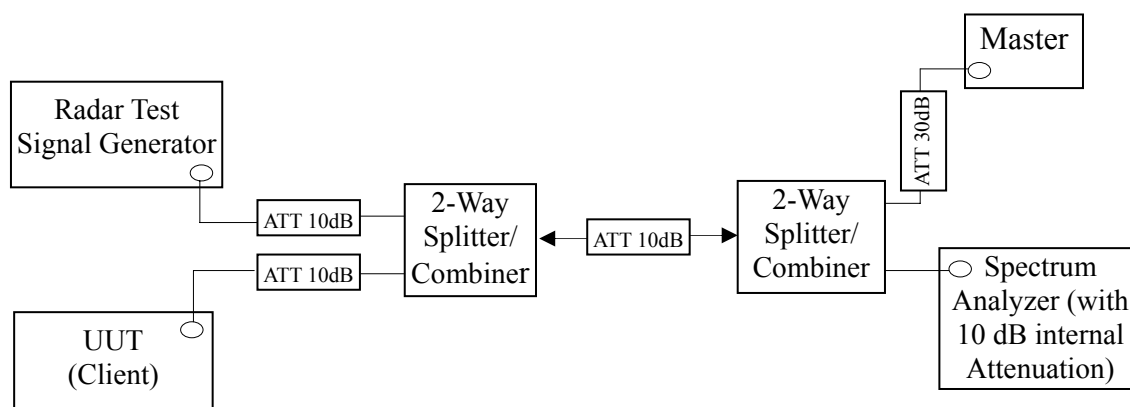

5.1.2. Test Setup Operation


System testing was performed with the designated MPEG test file that streams full motion video from the Access Point to Client in full motion video mode using the media player with the V2.61 Codec package. This file is used by IP and Frame based systems for loading the test channel during the in-service compliance testing of the U-NII device.

The waveform parameters from within the bounds of the signal type are selected randomly using uniform distribution.

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

5.1.3. Test Setup for Data Traffic Plot

40MHz

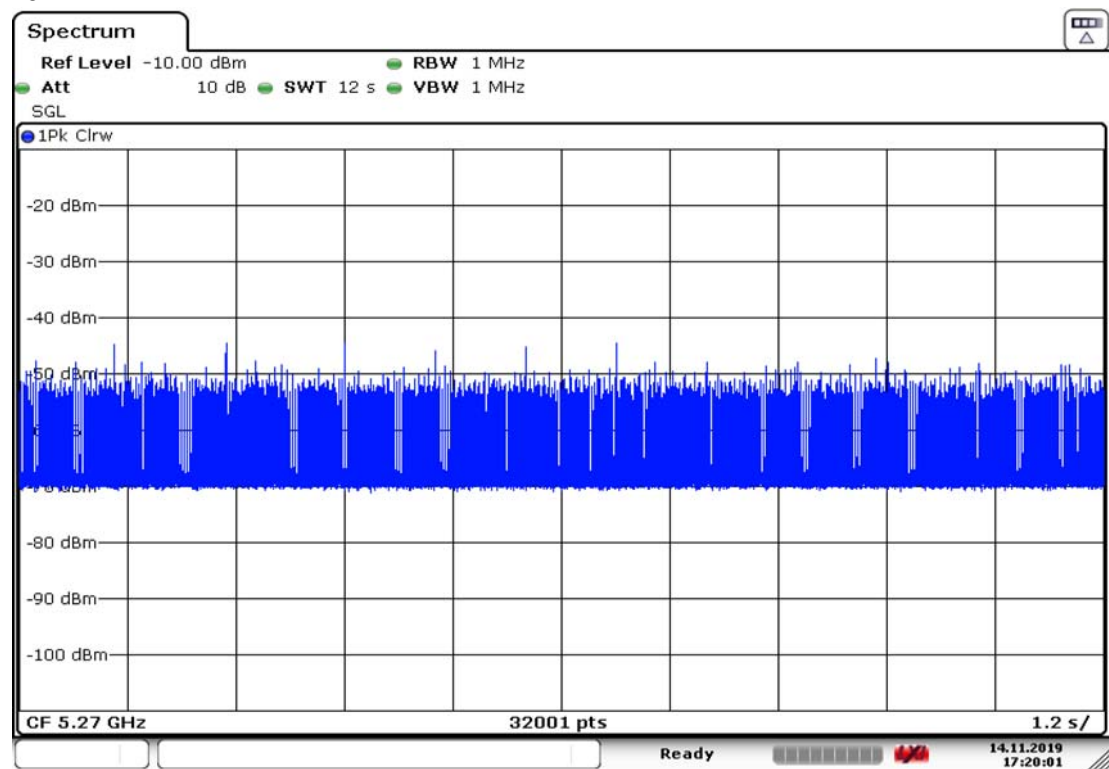

Date: 14.NOV.2019 17:20:01

5.2. Channel Move Time, Channel Closing Transmission Time, Non-Occupancy Period, Non-Associated Client Beacon Measurement

5.2.1. Limit

Parameter	Value
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
Non-Occupancy Period	Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel
Non-Associated Client Beacon	The non-associated Client Beacon Test is during the 30 minutes observation time. The EUT should not make any transmissions in the DFS band after EUT power up.
Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows: - For the Short Pulse Radar Test Signals this instant is the end of the Burst. - For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated. - For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

5.2.2. Test Procedures

- When a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the operating channel of the U-NII device. A U-NII device operating as a Client Device will associate with the Master of channel. Stream the MPEG test file from the Master Device to the Client Device on the selected channel for entire period of the test. At time to the radar waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
- Observe the transmissions of the EUT at the end of the radar Burst on the Operating channel. Measure and record the transmissions from the EUT during the observation time [Channel Move Time]. One 10 Second plot be reported for the short Pulse Radar type 1-4 and one for the Long Pulse Radar Type test in a 22 second plot. The plot for the Short Pulse Radar types start at the end of the radar burst. The Channel Move Time will be calculated based on the plot of the short Pulse Radar Type. The Long Pulse Radar Type plot show the device ceased transmissions within the 10 second window after detection has occurred. The plot for the Long Pulse Radar type should start at the beginning of the 12 second waveform.
- Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, Peak detection and max hold.
- Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume only transmissions on this channel.

5.3. Test Result

量測結果，請參見附錄一。

6. USER ACCESS RESTRICTION


DFS controls (hardware or software) related to radar detection are not accessible to the user.

附錄 一

受測裝置之測試結果

1. Test Result for Channel Closing Transmission Time & Channel Move Time

Test Date	2019/11/14	Temp./Hum.	23°C/62%
Test Mode	40MHz	Tested By	Kuper Hsu
Frequency	TX 5270MHz	Test Model	SHP-HB700W/TW

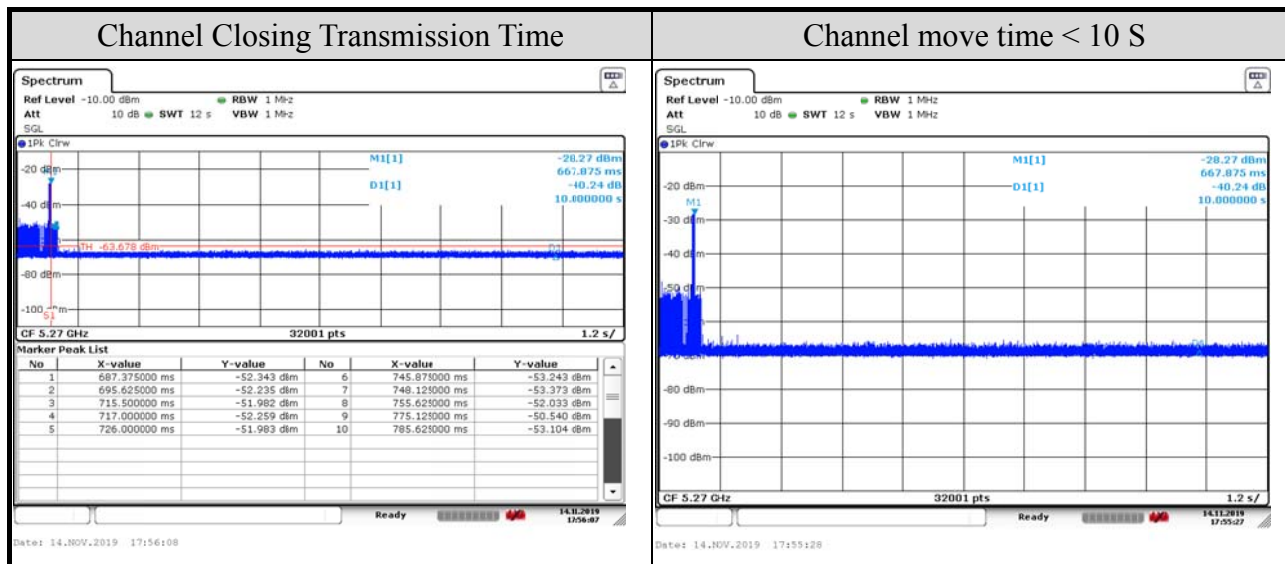

Channel Closing Transmission Time Calculated	
Sweep Time(S) sec	12
Sweep points (P)	32001
Number of Sweep points in 10 sec (N)	10
Channel Closing Time (C) ms	3.75

Channel closing time is calculated from $C=N* dwell$; where dwell is the occupancy time per sweep point calculated by the formula: $dwell=S/P$. N is the number of sweep points indicating transmission after S1; where S1 is the radar signal detected

2. Test Result for Non-Occupancy Period, Non-associated Test

Test Date	2019/11/14	Temp./Hum.	23°C/62%
Test Mode	40MHz	Tested By	Kuper Hsu
Frequency	TX 5270MHz	Test Model	SHP-HB700W/TW

