晶復科技股份有限公司
A Test Lab Techno Corp.

低功率射頻器材試驗報告

報告編號	2108DR44
版本(Rev.)	01
產品名稱	TurboX C40x SOM
申請廠商	Thundercomm Technology Co., Ltd.
廠　　牌	TurboX
型式 (號)	TurboX C405
系列型式 (號)	TurboX C405-D
產品試驗依據之標準	低功率射頻器材技術規範(LP0002) 109 年 7 月 1 日
報告發行日期	110 年 09 月 13 日

填發本型式認可報告之試驗機構　(認可代號)

晶復科技股份有限公司
33465 桃園市八德區長安街 140-1 號
Tel：03-2710188 / Fax：03-2710190

財團法人全國認證基金會
認證編號　　：1330
認證有效期間：108.09.06 ~ 111.09.05
認可能量範圍：低功率射頻器材技術規範(LP0002) (頻率範圍:9 kHz to 40 GHz)

免 責 聲 明

1.本測試報告所敘述之測試結果，僅對顧客所提供之測試樣品，在此測試報告所述及之測試條件下，所實施之量測有效。

2.本測試報告未經晶復科技股份有限公司書面同意，不得部分複製本報告內容。

3.本測試報告內容之相關資訊皆由顧客提供，針對顧客所提供資訊之正確性、適當性或完整性，若有疑義或錯誤，並因此影響本測試報告結果有效性時，本實驗室不負其相關責任。

報告修訂紀錄

版本 (Rev.)	發行日期	修訂內容	修訂者
00	110 年 08 月 31 日	初版發行	趙翊如
01	110 年 09 月 13 日	更新 2.2 章節(P.9) 更新 2.3 章節(P.10) 更新 Annex C (P.240) 更新 Annex E (P.863)	趙翊如

低功率射頻器材測試證明書

產 品 名 稱　：TurboX C40x SOM

廠　　牌　：TurboX

型　　號　：TurboX C405

系 列 型 號　：TurboX C405-D

申 請 廠 商　：Thundercomm Technology Co., Ltd.

申請者地址　：Building 4, 99# Xiantao Data Valley Zhonglu, Yubei District, Chongqing, China, 401120

製 造 廠 商　：Thundercomm Technology Co., Ltd.

製造商地址　：Building 4, 99# Xiantao Data Valley Zhonglu, Yubei District, Chongqing, China, 401120

待測物電壓　：DC 3.8 V, 1.2 A

量 測 規 範　：低功率射頻器材技術規範(LP0002) 109年07月01日

試驗實驗室　：晶復科技股份有限公司(桃園市八德區長安街140-1號)

樣品接受日期：110 年 07 月 26 日

試 驗 日 期　：110 年 07 月 30 日 ~ 110 年 08 月 09 日

報告中所描述之測試結果與待測設備之架構組合，均根據實際量測情況作詳實的記錄。
由測試結果顯示，上述待測設備樣機確實已符合低功率射頻器材技術規範(LP0002)所規定的各項限制值。

特 此 證 明 ！

Approved By：Kai Yu Yang

(Kai Yu Yang)

目　　錄

名 稱　　頁 次

低功率射頻器材測試證明書 3
1. 一般敘述 5
1.1 待測設備一般敘述 5
1.2 其他相關聲明 7
2. 量測儀器及測試配置說明 8
2.1 量測設備 8
2.2 檢驗系統示意圖 9
2.3 輔助測試之週邊設備描述 10
2.4 測試軟體版本 11
2.5 測試模式 11
2.6 量測不確定度 24
2.7 試驗環境 24
3. 測試項目與結果判定總表 25
4. 測試項目表列 27
4.1 電源線傳導干擾之量測 27
4.2 2.4 GHz 檢驗項目 28
4.2.1 場強輻射之量測 28
4.2.2 峰值傳導輸出功率 31
4.2.3 天線規格之要求 31
4.2.4 非必要頻帶之量測 32
4.2.5 6 dB 頻寬之要求 32
4.2.6 峰值發射電功率密度之要求 33
4.2.7 電波暴露量之評估 34
4.3 5 GHz U-NII 檢驗項目 35
4.3.1 場強輻射與非必要頻帶之量測 35
4.3.2 最大傳導輸出功率之量測 38
4.3.3 最大傳導功率頻譜密度之要求 40
4.3.4 26 dB 頻寬之要求 42
4.3.5 6 dB 頻寬之要求 42
4.3.6 發射功率控制(TPC)之量測 43
4.3.7 動態頻率選擇(DFS)之量測 44
4.3.8 頻道可用性檢查時間之量測 45
4.3.9 頻道移動時間之量測 46
4.3.10 不可佔用時間之量測 47
4.3.11 天線規格之要求 48
4.3.12 電波暴露量之評估 48
5. Test Results 49
Annex A. Conducted Emission 49
Annex B. Radiated Emission Measurement (2.4 GHz) 53
Annex C. Conducted Test Results (2.4 GHz) 205
Annex D. Radiated Emission Measurement (5 GHz) 249
Annex E. Conducted Test Results (5 GHz) 766

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產 品 名 稱	TurboX C40x SOM	
廠 牌	TurboX	
型 號	TurboX C405	
系 列 型 號	TurboX C405-D	
額 定 電 源	DC 3.8 V, 1.2 A	
待測物電源類別	Power Adapter	
調 變 方 式	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n 2.4 GHz 20 MHz / 40 MHz: OFDM IEEE 802.11a U-NII Band: OFDM IEEE 802.11n 5 GHz 20 MHz / 40 MHz U-NII Band: OFDM IEEE 802.11ac 20 MHz / 40 MHz / 80 MHz U-NII Band: OFDM *此產品之不具有動態選擇(DFS)之雷達偵測功能 (Client without radar detection function)	
頻率使用範圍	Mode	Frequency Range (MHz)
	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n 2.4 GHz 20 MHz	2412 – 2462
	IEEE 802.11n 2.4 GHz 40 MHz	2422 – 2452
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band I IEEE 802.11ac 20 MHz U-NII Band I	5180 – 5240
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A IEEE 802.11ac 20 MHz U-NII Band II-A	5260 – 5320
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C IEEE 802.11ac 20 MHz U-NII Band II-C	5500 – 5700
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz (Straddle band) IEEE 802.11ac 20 MHz (Straddle band)	5720
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band III IEEE 802.11ac 20 MHz U-NII Band III	5745 – 5825
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I IEEE 802.11ac 40 MHz U-NII Band I	5190 – 5230
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A IEEE 802.11ac 40 MHz U-NII Band II-A	5270 – 5310
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C IEEE 802.11ac 40 MHz U-NII Band II-C	5510 – 5670
	IEEE 802.11n 5 GHz 40 MHz (Straddle band) IEEE 802.11ac 40 MHz (Straddle band)	5710
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III IEEE 802.11ac 40 MHz U-NII Band III	5755 – 5795
	IEEE 802.11ac 80 MHz U-NII Band I	5210
	IEEE 802.11ac 80 MHz U-NII Band II-A	5290
	IEEE 802.11ac 80 MHz U-NII Band II-C	5530
	IEEE 802.11ac 80 MHz (Straddle band)	5690
	IEEE 802.11ac 80 MHz U-NII Band III	5775

天 線 資 訊	廠牌	Antenna	型號	型態	增益值(dBi)	
					2.4 GHz	5 GHz
	molex	Type A, ANT 1	146153	Dipole Antenna	3.00	4.00
		Type A, ANT 2	146153	Dipole Antenna	3.00	4.00
	G_{ANT}				3.00	4.00
	Directional Gain				6.01	7.01
	INPAQ	Type B, ANT 1	RFPCA292034IMLB901	PIFA Antenna	3.49	5.52
		Type B, ANT 2	RFPCA292016IMLB901	PIFA Antenna	3.51	5.55
	G_{ANT}				3.50	5.54
	Directional Gain				6.51	8.55

RF最大輸出功率	Mode	Power	
	IEEE 802.11b	20.66 dBm	0.117 W
	IEEE 802.11g	22.76 dBm	0.189 W
	IEEE 802.11n 2.4 GHz 20 MHz	22.47 dBm	0.177 W
	IEEE 802.11n 2.4 GHz 40 MHz	22.45 dBm	0.176 W
	IEEE 802.11a U-NII Band I	17.05 dBm	0.051 W
	IEEE 802.11a U-NII Band II-A	17.91 dBm	0.062 W
	IEEE 802.11a U-NII Band II-C	18.63 dBm	0.073 W
	IEEE 802.11a U-NII Band III	17.34 dBm	0.054 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band I	18.47 dBm	0.070 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A	18.23 dBm	0.067 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C	17.70 dBm	0.059 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band III	17.19 dBm	0.052 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I	16.25 dBm	0.042 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A	17.46 dBm	0.056 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C	18.17 dBm	0.066 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III	16.92 dBm	0.049 W
	IEEE 802.11ac 20 MHz U-NII Band I	18.64 dBm	0.073 W
	IEEE 802.11ac 20 MHz U-NII Band II-A	18.41 dBm	0.069 W
	IEEE 802.11ac 20 MHz U-NII Band II-C	17.81 dBm	0.060 W
	IEEE 802.11ac 20 MHz U-NII Band III	17.30 dBm	0.054 W
	IEEE 802.11ac 40 MHz U-NII Band I	16.29 dBm	0.043 W
	IEEE 802.11ac 40 MHz U-NII Band II-A	17.62 dBm	0.058 W
	IEEE 802.11ac 40 MHz U-NII Band II-C	18.32 dBm	0.068 W
	IEEE 802.11ac 40 MHz U-NII Band III	17.14 dBm	0.052 W
	IEEE 802.11ac 80 MHz U-NII Band I	8.76 dBm	0.008 W
	IEEE 802.11ac 80 MHz U-NII Band II-A	11.10 dBm	0.013 W
	IEEE 802.11ac 80 MHz U-NII Band II-C	17.35 dBm	0.054 W
	IEEE 802.11ac 80 MHz U-NII Band III	15.64 dBm	0.037 W

設備類型		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		---
Fixed point-to-point access points		---
Client devices		V

輸出/輸入埠說明：

輸 出 / 入 埠		數量	介面內容說明
1	Signal Port	1	連接至 PCB 板

1.2 其他相關聲明

本測試報告屬(以下選擇一種打■)

■	申請新的型式檢驗認可的測試.
□	已取得型式檢驗認可之商品,因設計變更而重新測試. 登錄號碼: XXXXXXXX

系列機型、機型版別之差異說明

原機型廠牌、型號	系列機型廠牌、型號	差異敘述
TurboX/ TurboX C405	TurboX/ TurboX C405-D	因市場銷售區隔，增加系列型號 TurboX C405-D，與主型號 TurboX C405 差異僅 CPU 中的一個小音效開關不同，其餘 RF 射頻元件、電路設計、印刷電路板等等並無變更。 測試結果說明： TurboX C405-D與原機型TurboX C405經工程判定其差異需驗證電源線傳導干擾、輸出峰值功率、場強輻射其它不必要之訊號(1 GHz以下)，結果為原機型TurboX C405較Worst，故僅呈現主型號完整數據。

2. 量測儀器及測試配置說明

2.1 量測設備

For Conducted
Test Period: Aug. 04 ~ Aug. 09, 2021
測試者: 呂廸曄, 徐基哲, 羅子維

名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
Power Sensor	Agilent	N1921A	MY45241957	12/09/2020	1 year
Power Meter	Agilent	N1911A	MY45101619	12/09/2020	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/24/2020	1 year

For Conducted Emission
Test Period: Aug. 07, 2021
測試者: 呂廸曄


名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
測試接收機 (9 kHz~3 GHz)	R&S	ESCI	100367	05/21/2021	1 year
線性阻抗模擬網路	R&S	ENV216	101040	03/29/2021	1 year
線性阻抗模擬網路	R&S	ENV216	101041	04/08/2021	1 year

For Radiated Emissions
Test Period: Jul. 30 ~ Aug. 04, 2021
測試者: 葉佳原, 周瑞鴻, 李怡華, 李亭衛, 莊婉玄, 吳展寬


名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
Spectrum Analyzer	KEYSIGHT	N9030B	MY57143537	04/19/2021	1 year
Amplifier	Agilent	8447D	2944A11119	01/15/2021	1 year
Amplifier	Agilent	8449B	3008A02237	10/21/2020	1 year
Preamplifier	EMCI	EMC2654045	980028	08/24/2020	1 year
天線	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	01146	07/19/2021	1 year
天線(1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	02207	07/09/2021	1 year
天線(18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/18/2020	1 year

2.2 檢驗系統示意圖

電源傳導干擾測試配置

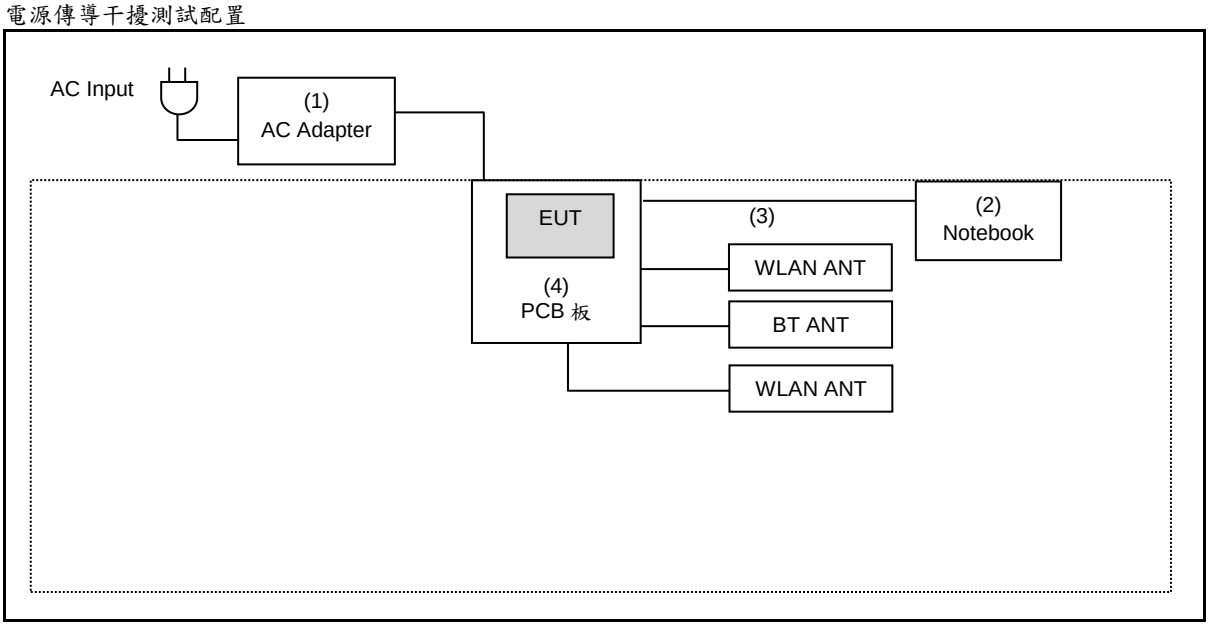

輻射干擾測試配置

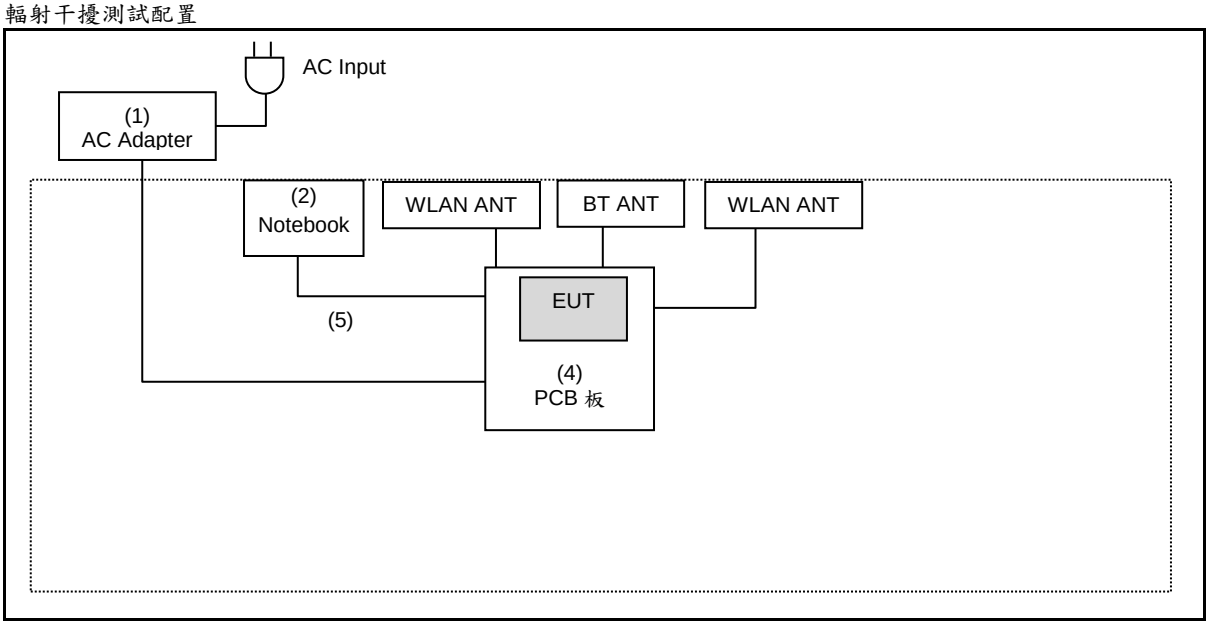

2.3 輔助測試之週邊設備描述

下列輔助設備或配件為測試中所使用，以形成一個代表性的受測系統。

週邊名稱		廠 牌	型 號	序 號	電源線	備 註
(1)	AC Adapter	Polycom	SSC-120500	---	Non-Shielded, 2 m	INPUT : 100-240 VAC, 50/60 Hz, 1.5 A OUTPUT : 12 VDC , 5.0 A (申請者提供)
(2)	Notebook	ASUS	P1448U	K7NXCV10 P87329A	---	(實驗室提供)
(3)	USB Cable	拓普	E364685	---	---	規格:STD-A → Micro-B 長度:1 m (實驗室提供)
(4)	PCB 板	TurboX	TurboX C405	---	---	(申請者提供)
(5)	USB Cable	LG	EAD63769703	---	---	規格:STD-A → Micro-B 長度:1.2 m (實驗室提供)

測試組合：

EUT Configure Mode	CE	RE<1 GHz	RE≧1 GHz	備註
AC Adapter	V	V	V	測試週邊(1)
Notebook	V	V	V	測試週邊(2)
USB Cable	V	---	---	測試週邊(3)
PCB 板	V	V	V	測試週邊(4)
USB Cable	---	V	V	測試週邊(5)

RE≧1 GHz：Radiated Emission above 1 GHz & Bandedge Measurement
RE<1 GHz：Radiated Emission below 1 GHz
CE：Conducted Emission
V：Final mode
X：Non support
---：No evaluation required
Blank Space：Pre-test mode

2.4 測試軟體版本

Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

2.5 測試模式

使用定頻模式量測

Pre-Test Mode
Mode 1: IEEE 802.11b Continuous TX Mode
Mode 2: IEEE 802.11g Continuous TX Mode
Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 5: IEEE 802.11a Continuous TX Mode
Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode
Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 11: Receiver Mode

Final-Test Mode
Mode 1: IEEE 802.11b Continuous TX Mode
Mode 2: IEEE 802.11g Continuous TX Mode
Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 5: IEEE 802.11a Continuous TX Mode
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 11: Receiver Mode

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (VHT20/VHT40 covers HT20/HT40). The table is a list of the test modes show in this test report.

Note 2 :天線分別為 molex & INPAQ 2 組，Radiation 2 組天線皆有評估、Conducted 僅評估 INPAQ 天線(Worst).

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT 1	ANT 2	
Mode 1	2412	12.0	12.0	QRCT V4.0.00163.0
	2437	14.5	14.5	
	2462	15.5	15.5	
Mode 2	2412	13.5	13.5	
	2437	16.0	16.0	
	2462	13.0	13.0	
Mode 3	2412	12.5	12.5	
	2437	15.5	15.5	
	2462	13.0	13.0	
Mode 4	2422	12.0	12.0	
	2437	13.0	13.0	
	2452	11.0	11.0	

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT 1	ANT 2	
Mode 5	5180.0	16	16	QRCT V4.0.00163.0
	5200.0	18	18	
	5220.0	18	18	
	5240.0	18.5	18.5	
	5260.0	18.5	18.5	
	5280.0	17.5	17.5	
	5300.0	17.5	17.5	
	5320.0	17.5	17.5	
	5500.0	17.5	17.5	
	5520.0	17	17	
	5540.0	17	17	
	5560.0	17	17	
	5580.0	17	17	
	5600.0	17	17	
	5620.0	17	17	
	5640.0	17	17	
	5660.0	17	17	
	5680.0	17	17	
	5700.0	16	16	
	5720.0	17	17	
	5745.0	17.5	17.5	
	5765.0	17.5	17.5	
	5785.0	17.5	17.5	
	5805.0	17.5	17.5	
	5825.0	17.5	17.5	

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT 1	ANT 2	
Mode 6	5180.0	16	16	QRCT V4.0.00163.0
	5200.0	18	18	
	5220.0	18	18	
	5240.0	18	18	
	5260.0	18	18	
	5280.0	17.5	17.5	
	5300.0	17.5	17.5	
	5320.0	17	17	
	5500.0	17	17	
	5520.0	16.5	16.5	
	5540.0	16.5	16.5	
	5560.0	16.5	16.5	
	5580.0	16.5	16.5	
	5600.0	16.5	16.5	
	5620.0	16.5	16.5	
	5640.0	16.5	16.5	
	5660.0	16.5	16.5	
	5680.0	16.5	16.5	
	5700.0	15	15	
	5720.0	17	17	
	5745.0	17.5	17.5	
	5765.0	17.5	17.5	
	5785.0	17.5	17.5	
	5805.0	17.5	17.5	
	5825.0	17	17	
Mode 7	5190.0	11	11	QRCT V4.0.00163.0
	5230.0	16	16	
	5270.0	18	18	
	5310.0	12	12	
	5510.0	13.5	13.5	
	5550.0	17	17	
	5590.0	17	17	
	5630.0	17	17	
	5670.0	15.5	15.5	
	5710.0	17.5	17.5	
	5755.0	17	17	
	5795.0	17	17	

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT 1	ANT 2	
Mode 8	5180.0	16	16	QRCT V4.0.00163.0
	5200.0	18	18	
	5220.0	18	18	
	5240.0	18	18	
	5260.0	18	18	
	5280.0	17.5	17.5	
	5300.0	17.5	17.5	
	5320.0	17	17	
	5500.0	17	17	
	5520.0	16.5	16.5	
	5540.0	16.5	16.5	
	5560.0	16.5	16.5	
	5580.0	16.5	16.5	
	5600.0	16.5	16.5	
	5620.0	16.5	16.5	
	5640.0	16.5	16.5	
	5660.0	16.5	16.5	
	5680.0	16.5	16.5	
	5700.0	15	15	
	5720.0	17	17	
	5745.0	17.5	17.5	
	5765.0	17.5	17.5	
	5785.0	17.5	17.5	
	5805.0	17.5	17.5	
	5825.0	17	17	
Mode 9	5190.0	11	11	QRCT V4.0.00163.0
	5230.0	16	16	
	5270.0	18	18	
	5310.0	12	12	
	5510.0	13.5	13.5	
	5550.0	17	17	
	5590.0	17	17	
	5630.0	17	17	
	5670.0	15.5	15.5	
	5710.0	17.5	17.5	
	5755.0	17	17	
	5795.0	17	17	

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT 1	ANT 2	
Mode 10	5210.0	8.5	8.5	QRCT V4.0.00163.0
	5290.0	11	11	
	5530.0	11.5	11.5	
	5610.0	16	16	
	5690.0	15	15	
	5775.0	14	14	


Test Mode	ANT 1	ANT 2	ANT 1+2
Mode 1	V	V	V
Mode 2	V	V	V
Mode 3	V	V	V
Mode 4	V	V	V
Mode 5	V	V	V
Mode 6	V	V	V
Mode 7	V	V	V
Mode 8	V	V	V
Mode 9	V	V	V
Mode 10	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 1	2TX / 2RX (CDD)	1	1, 6, 11
Mode 2	2TX / 2RX (CDD)	6	1, 6, 11
Mode 3	2TX / 2RX (MIMO)	13	1, 6, 11
Mode 4	2TX / 2RX (MIMO)	27	3, 6, 9
Mode 5	2TX / 2RX (CDD)	6	36, 40, 48, 52, 56, 64, 100, 112, 140, 144, 149, 157, 165
Mode 6	2TX / 2RX (MIMO)	13	36, 40, 48, 52, 56, 64, 100, 112, 140, 144, 149, 157, 165
Mode 7	2TX / 2RX (MIMO)	27	38, 46, 54, 62, 102, 110, 134, 142, 151, 159
Mode 8	2TX / 2RX (MIMO)	13	36, 40, 48, 52, 56, 64, 100, 112, 140, 144, 149, 157, 165
Mode 9	2TX / 2RX (MIMO)	27	38, 46, 54, 62, 102, 110, 134, 142, 151, 159
Mode 10	2TX / 2RX (MIMO)	58.6	42, 58, 106, 122, 138, 155

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimun VBW (kHz)
Mode 1	2412.0	12.270	12.450	0.986	0.063	0.010
Mode 2	2412.0	2.040	2.065	0.988	0.053	0.010
Mode 3	2412.0	0.975	1.005	0.970	0.132	1.026
Mode 4	2422.0	0.498	0.537	0.927	0.327	2.008
Mode 5	5180.0	2.060	2.070	0.995	0.021	0.010
Mode 6	5180.0	0.980	1.005	0.975	0.109	1.020
Mode 7	5190.0	0.936	0.963	0.972	0.124	1.068
Mode 8	5180.0	1.905	1.925	0.990	0.045	0.010
Mode 9	5190.0	0.498	0.525	0.949	0.229	2.008
Mode 10	5210.0	0.462	0.492	0.939	0.273	2.165


Mode 1: IEEE 802.11b Continuous TX Mode	
On+off time	

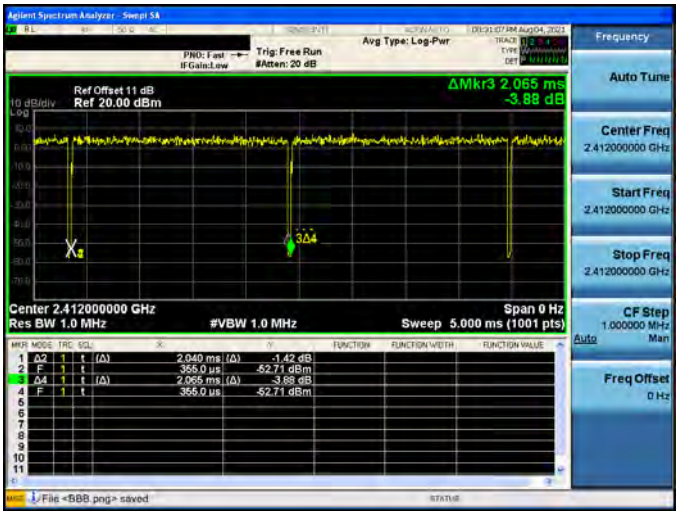
Mode 2: IEEE 802.11g Continuous TX Mode	
On+off time	

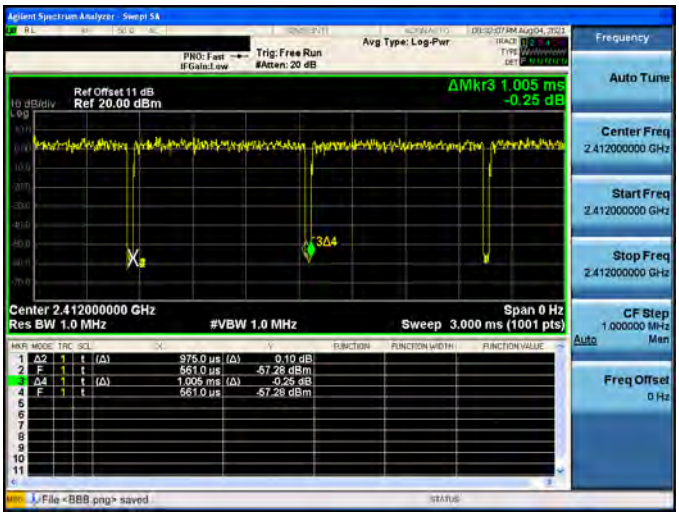
Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode	
On+off time	


Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode	
On+off time	

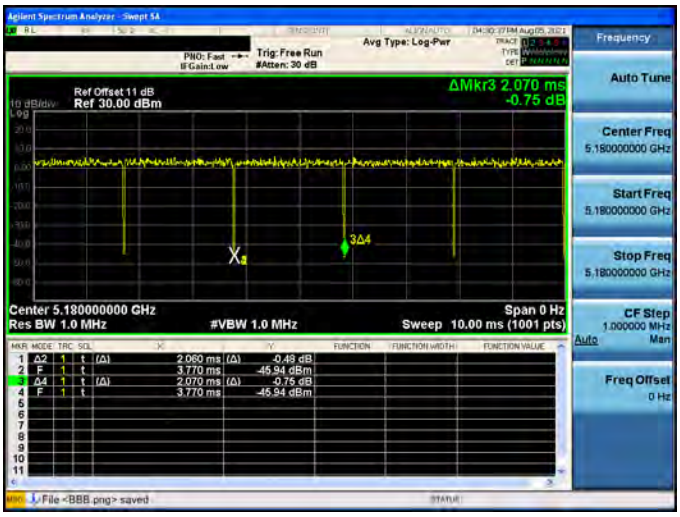Mode 5: IEEE 802.11a Continuous TX Mode	
On+off time	

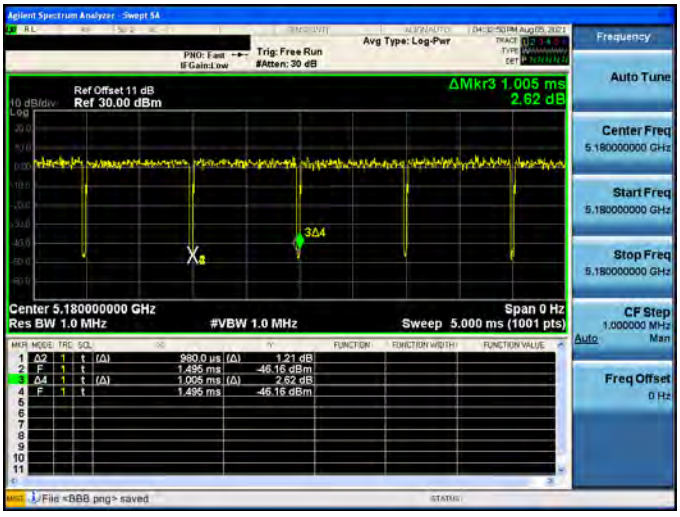Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode	
On+off time	

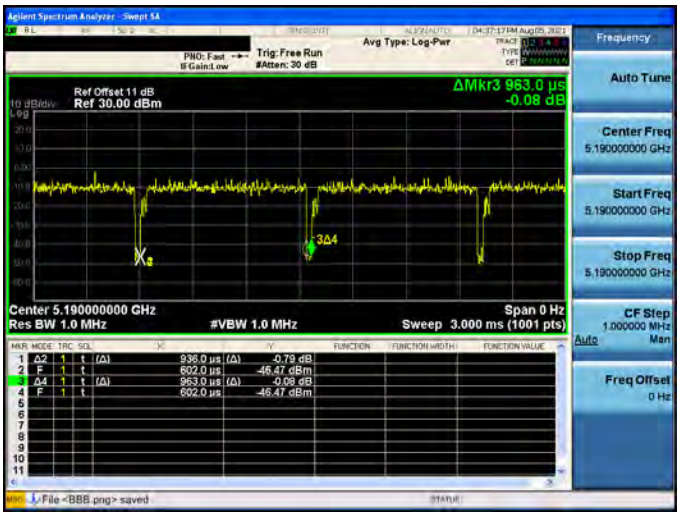Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode	
On+off time	

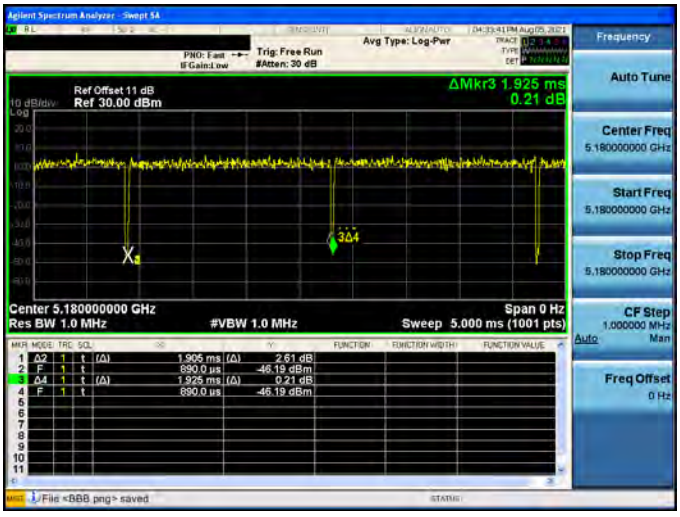Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode	
On+off time	

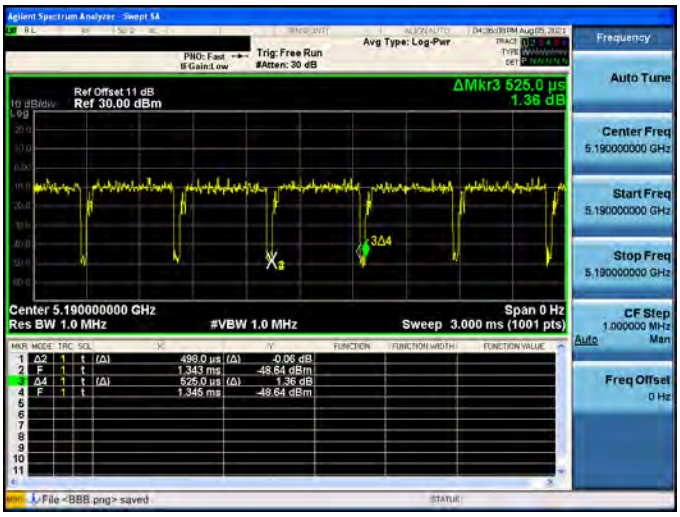Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode	
On+off time	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode	
On+off time	

2.6 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.1 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		1.3 x 10^-7
Duty Cycle		1.1 %
Time Occupancy		1.5 %

2.7 試驗環境

產品測試時之實驗室環境條件如下:

項 目	測 試 項 目	需 求	實 際
溫度 Temperature (°C)	LP0002	10 - 40	20 - 30
濕度 Humidity (%RH)		10 - 90	45 - 75

3. 測試項目與結果判定總表

本測試報告之所有項目皆依據 NCC 低功率射頻器材技術規範(LP0002)之檢驗法。

2.4 GHz 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	Annex A.	請參閱 2.1 節	符合
2	場強輻射	低功率射頻器材技術規範 3.5 節、3.6 節、4.10.1.5 節	Annex B.	請參閱 2.1 節	符合
3	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 4.10.1.5 節	Annex B.	請參閱 2.1 節	符合
4	峰值傳導輸出功率	低功率射頻器材技術規範 4.10.1.2(1)(C)節	Annex C.	請參閱 2.1 節	符合
5	天線規格	低功率射頻器材技術規範 4.10.1.3(3)、4.10.1.4 節	請參閱 4.2.3 節	-------	符合
6	非必要頻帶	低功率射頻器材技術規範 4.10.1.5(1)節	Annex C.	請參閱 2.1 節	符合
7	6 dB 頻寬	低功率射頻器材技術規範 4.10.1.6(2)(A)節	Annex C.	請參閱 2.1 節	符合
8	峰值發射電功率密度	低功率射頻器材技術規範 4.10.1.6(2)(B)節	Annex C.	請參閱 2.1 節	符合
9	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	Annex E.	請參閱 2.1 節	符合

本產品透過預測試場強輻射確認 X、Y 和 Z 個軸中最差之結果軸向為 X 軸，因此場強輻射完整測試 X 軸並將其結果記錄於報告中。

5 GHz U-NII 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	Annex A.	請參閱 2.1 節	符合
2	場強輻射	低功率射頻器材技術規範 3.5 節、3.6 節	Annex D.	請參閱 2.1 節	符合
3	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 3.6 節、5.7.4 節	Annex D.	請參閱 2.1 節	符合
4	非必要頻帶	低功率射頻器材技術規範 5.7.4 節	Annex E.	請參閱 2.1 節	符合
5	最大傳導輸出功率	低功率射頻器材技術規範 5.7.3 節	Annex E.	請參閱 2.1 節	符合
6	最大傳導功率頻譜密度	低功率射頻器材技術規範 5.7.3 節	Annex E.	請參閱 2.1 節	符合
7	26 dB 頻寬之要求	N/A	Annex E.	請參閱 2.1 節	----
8	6 dB 頻寬之要求	低功率射頻器材技術規範 5.7.5 節	Annex E.	請參閱 2.1 節	符合
9	發射功率控制(TPC)	低功率射頻器材技術規範 5.7.7.1 節	Annex E.	請參閱 2.1 節	符合
10	動態頻率選擇(DFS) 雷達偵測功能	低功率射頻器材技術規範 5.7.7.2 節	Annex E.	請參閱 2.1 節	不適用
11	動態頻率選擇(DFS) 頻道可用性檢查時間	低功率射頻器材技術規範 5.7.7.2(3)節	Annex E.	請參閱 2.1 節	不適用
12	動態頻率選擇(DFS) 頻道移動時間	低功率射頻器材技術規範 5.7.7.2(4)節	Annex E.	請參閱 2.1 節	符合
13	動態頻率選擇(DFS) 不可佔用時間	低功率射頻器材技術規範 5.7.7.2(5)節	Annex E.	請參閱 2.1 節	符合
14	天線規格	低功率射頻器材技術規範 5.7.8 節	請參閱 4.3.11 節	-------	符合
15	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	Annex E.	請參閱 2.1 節	符合

本產品透過預測試場強輻射確認 X、Y 和 Z 個軸中最差之結果軸向為 X 軸，因此場強輻射完整測試 X 軸並將其結果記錄於報告中。

Decision Rule

■ Uncertainty is not included.

□ Uncertainty is included.

4. 測試項目表列

4.1 電源線傳導干擾之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 3.3 節，以市電為電源之低功率射頻器材，其傳導回電源線上頻率自 150 kHz 至 30 MHz 之射頻電壓 (在電源端子每一電源線對接地點) 不得超過下表所列之限值。測量時應經過 50 Ω//50 μH 之電源線阻抗模擬網路 (LISN)。頻率重疊處，以較低限值為準。

Frequency (MHz)	傳導限制值 (dBuV)	
	準峰值 (Quasi – peak)	平均值 (Average)
0.15 – 0.5	66 - 56 (註)	56 - 46 (註)
0.5 – 5	56	46
5 - 30	60	50

註：隨頻率之對數遞減。

測試方法 ：

測試場地為標準傳導測試場地。將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15 MHz 至 30 MHz 之間之電源線傳導放射強度。


干擾值之計算

電源傳導干擾電壓之計算公式如下

結果值 = 儀器讀值(QP/AV) + 校正因子

其中校正因子為： 饋線損失 + 電源阻抗模擬網路損失

測試架構圖 ：

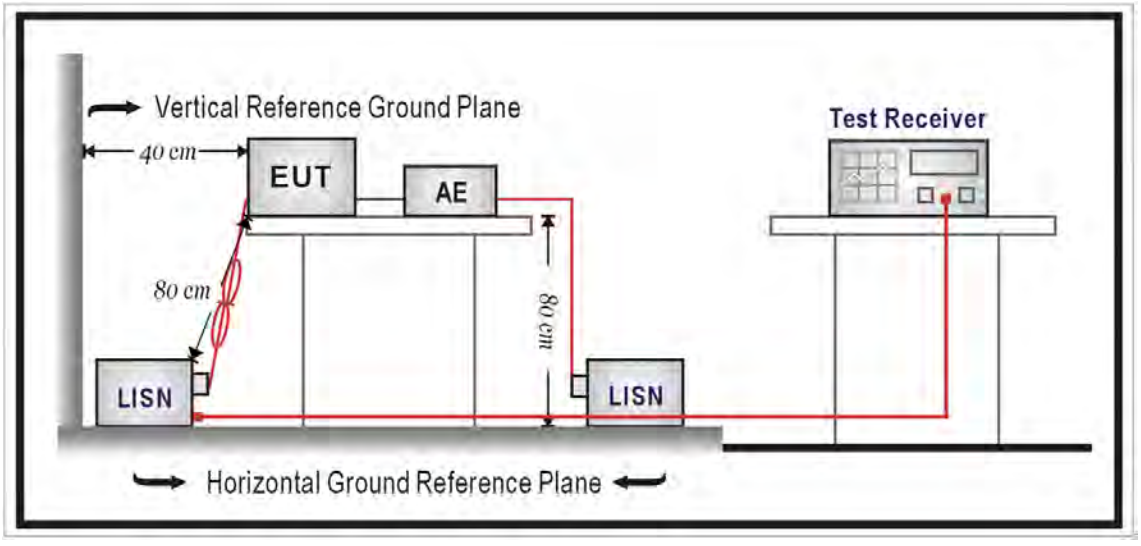

4.2 2.4 GHz 檢驗項目

4.2.1 場強輻射之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之使用頻帶範圍外之任意 100 千赫 (kHz)內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫(kHz)內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090～0.110	108.00～138.00	1660.0～1785.0	8025.0～8500.0
0.490～0.510	149.90～150.05	1805.0～1888.0	9000.0～9200.0
2.172～2.198	156.70～156.90	1885.0～1900.0	9300.0～9500.0
3.013～3.033	162.01～167.17	1905.0～1985.0	10600～12700
4.115～4.198	167.72～173.20	2010.0～2025.0	13250～13400
5.670～5.690	240.00～285.00	2110.0～2170.0	14470～14500
6.200～6.300	322.00～335.40	2200.0～2300.0	15350～16200
8.230～8.400	399.90～410.00	2310.0～2390.0	17700～21400
12.265～12.600	485.00～510.00	2483.5～2900.0	22010～23120
13.340～13.430	608.00～614.00	3260.0～3267.0	23600～24000
14.965～15.020	703.00～748.00	3332.0～3339.0	31200～31800
16.700～16.755	758.00～803.00	3345.8～3358.0	36430～36500
19.965～20.020	825.00～915.00	3500.0～4400.0	38600 以上
25.500～25.700	930.00～1240.0	4500.0～5250.0	
37.475～38.275	1300.0～1427.0	5350.0～5460.0	
73.500～75.400	1435.0～1626.5	7250.0～7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻　率(MHz)	電場強度(μV/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

測試方法 ：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為： 天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖 ：

量測頻率低於 1 GHz 以下之測試配置

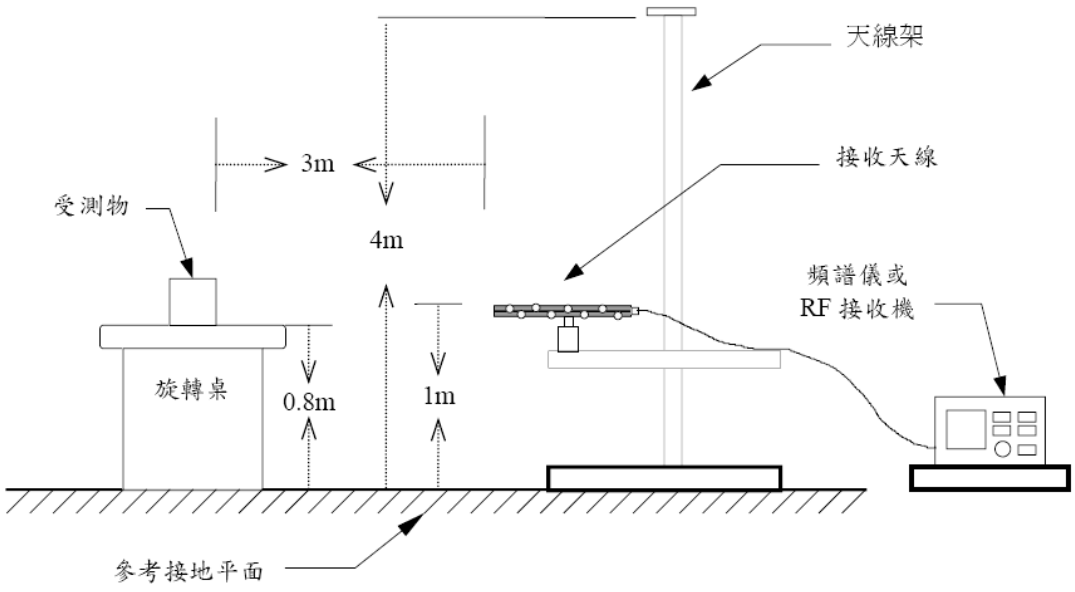

量測頻率高於 1 GHz 以上之測試配置

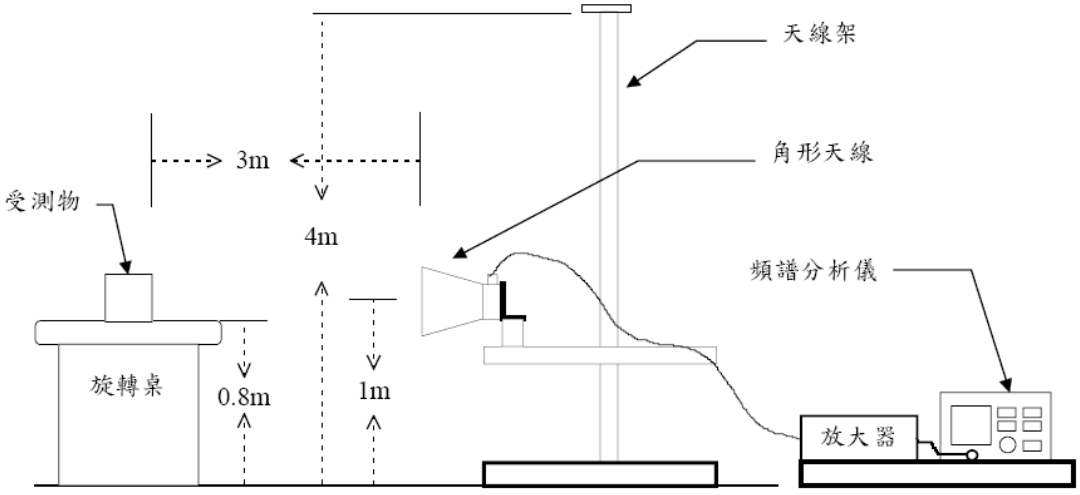

4.2.2 峰值傳導輸出功率

合格標準:


依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)節之要求，操作於 2400-2483.5 兆赫(MHz)數位調變技術系統：1 瓦(W)(含)以下

MIMO mode：

Directional Gain = 10*log{[10^(G1/20)+10^(G2/20)+…+10^(Gn/20)]^2/NANT} = 6.51 dBi > 6 dBi

Power Limit = 30 - 0.51 = 29.49 dBm

測試架構圖 ：

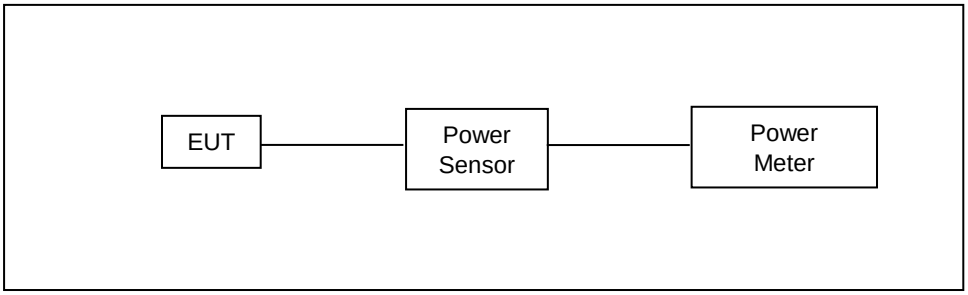

4.2.3 天線規格之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.3(3)節之要求，除 4.10.1.3(1)及 4.10.1.3(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.4 節之要求，天線之規格不受第 3.2 節規定之限制


判定結果: 符合。

4.2.4 非必要頻帶之量測

合格標準:

發射限制： 使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，須衰減 20 分貝(dB)，以射頻傳導或輻射方式測量。

測試架構圖 ：

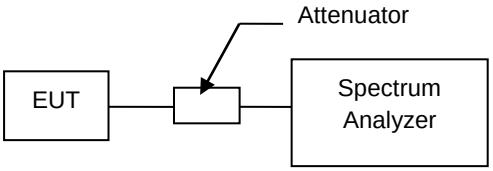

附註 1: 於使用頻帶範圍之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減 20 分貝(dB)以上，符合規定。


附註 2: 測試結果頻帶外之輻射雜訊皆小於主頻 TX 20 dB。

4.2.5 6 dB頻寬之要求

合格標準:

依據 NCC 低功率射頻器材技術規範 4.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言， 6 dB 頻寬至少應有 500 千赫(kHz)。

測試架構圖 ：

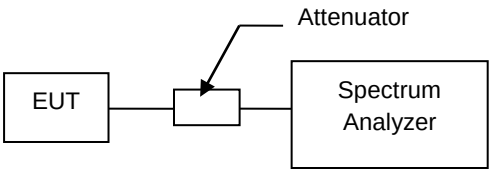

4.2.6 峰值發射電功率密度之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.6(2)(B)節之要求，數位調變技術(Digital Modulation Techniques)系統之功率密度,再使用頻率範圍之任意 3 kHz 頻寬內,由發射機傳導至天線之峰值發射電功率密度在任意期間內,皆不得大於 8 dBm(複合系統時, 關閉跳頻作業狀態檢驗)。


CDD/MIMO mode：

Directional Gain = 10*log{[10^(G1/20)+10^(G2/20)+…+10^(Gn/20)]^2/NANT} = 6.51 dBi > 6 dBi

Power Limit = 8 - 0.51 = 7.49 dBm/3 kHz

測試架構圖 ：

測試場地測試配置如圖所示。

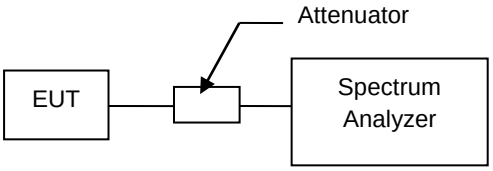

4.2.7 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～3.0	614	1.63	*100	6
3～30	1842/f	4.89/f	$*900/f^2$	6
30～300	61.4	0.163	1.0	6
300～1,500	-----	-----	f/300	6
1,500～100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～1.34	614	1.63	*100	30
1.34～30	824/F	2.19/F	$*180/F^2$	30
30～300	27.5	0.073	0.2	30
300～1,500	-----	-----	F/1500	30
1,500～100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

4.3 5 GHz U-NII 檢驗項目

4.3.1 場強輻射與非必要頻帶之量測

場強輻射合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090～0.110	108.00～138.00	1660.0～1785.0	8025.0～8500.0
0.490～0.510	149.90～150.05	1805.0～1880.0	9000.0～9200.0
2.172～2.198	156.70～156.90	1885.0～1900.0	9300.0～9500.0
3.013～3.033	162.01～167.17	1905.0～1985.0	10600～12700
4.115～4.198	167.72～173.20	2010.0～2025.0	13250～13400
5.670～5.690	240.00～285.00	2110.0～2170.0	14470～14500
6.200～6.300	322.00～335.40	2200.0～2300.0	15350～16200
8.230～8.400	399.90～410.00	2310.0～2390.0	17700～21400
12.265～12.600	485.00～510.00	2483.5～2900.0	22010～23120
13.340～13.430	608.00～614.00	3260.0～3267.0	23600～24000
14.965～15.020	703.00～748.00	3332.0～3339.0	31200～31800
16.700～16.755	758.00～803.00	3345.8～3358.0	36430～36500
19.965～20.020	825.00～915.00	3500.0～4400.0	38600 以上
25.500～25.700	930.00～1240.0	4500.0～5250.0	
37.475～38.275	1300.0～1427.0	5350.0～5460.0	
73.500～75.400	1435.0～1626.5	7250.0～7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻　率(MHz)	電場強度(μV/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

非必要頻帶合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.4 節之要:

不必要發射之限值：在操作頻帶外的峰值發射應衰減至符合下列限值：

1. 在 5.15 GHz～5.35 GHz 及 5.470 GHz～5.725 GHz 頻帶操作的發射器：帶外發射之有效等向輻射功率(EIRP)≦ -27 dBm/MHz。
2. 在 5.725 GHz～5.850 GHz 的頻帶操作之發射器：所有頻帶邊緣的頻率發射, 其有效等向輻射功率(EIRP)≦27 dBm/MHz；所有頻帶邊緣向外 5 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦27 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦15.6 dBm/MHz；所有頻帶邊緣向外 25 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦15.6 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦10 dBm/MHz；所有頻帶邊緣向外 75 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦10 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦-27 dBm/MHz;所有頻帶邊緣向外 75 MHz 頻率之發射的有效等向輻射功率(EIRP)≦-27 dBm/MHz。
3. 量測不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。
4. 當測量不必要發射之限值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。
5. 在 1 GHz 以下的不必要之發射，應符合第 3.6 條之規定，任何使用市電為供應電源之設備亦須符合 3.3 條之電源線傳導限值。
6. 不必要發射頻率屬第 3.5 條規定頻帶者，應符合第 3.6 條之規定。

測試方法 ：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為： 天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖 ：

量測頻率低於 1 GHz 以下之測試配置

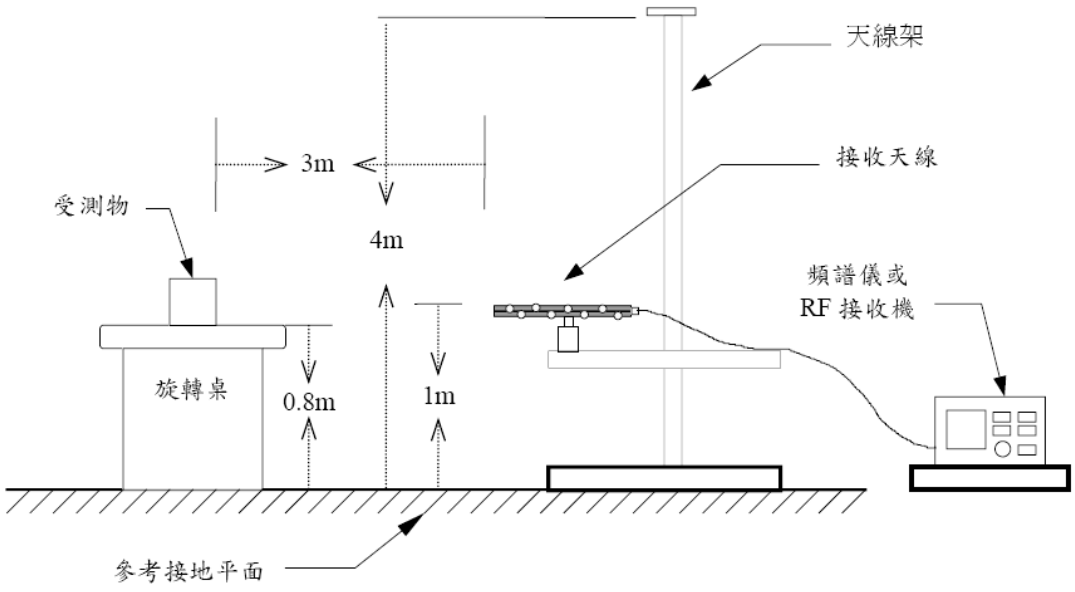

量測頻率高於 1 GHz 以上之測試配置

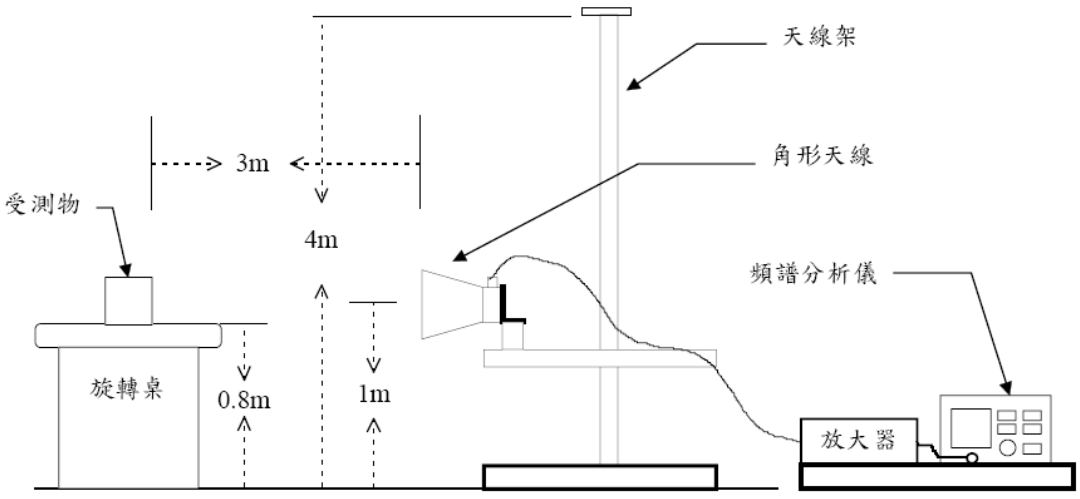

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

   (1) 供戶外操作使用:
   - 最大傳導輸出功率不能超過 1 W。
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
   - 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

   (2) 供室內操作使用:
   - 最大傳導輸出功率不能超過 1 W。
   - 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

   (3) 供固定式點對點操作使用:
   - 最大傳導輸出功率不能超過 1 W。
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
   - 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

   (4) 供行動或可攜式裝置操作使用:
   - 最大傳導輸出功率不能超過 250 mW。
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

   (1) 最大傳導輸出功率不能超過 250 mW 或 11 dBm+10 log B (B 是 26 dB 發射頻寬，單位 MHz)之較小者。

   (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

   (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

   (1) 最大傳導輸出功率不能超過 1 W。

   (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

   (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

   (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制(如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等)調整得出正確之峰值量測，以符合本段落所提之發射定義。

MIMO mode：

Directional Gain = 10*log{[10^(G1/20)+10^(G2/20)+…+10^(Gn/20)]^2/NANT} = 8.55 dBi > 6 dBi

IEEE 802.11n 20 MHz

Band I / Band II-A

＊Power Limit = 24 - 2.55 = 21.45 dBm

Band II-C

＊Power Limit = 23.86 - 2.55 = 21.31 dBm

＊ 250mW(24dBm) or 11+10*LogB，B=26dB BW=11+10*Log(19.34)= 23.86 dBm

Band III

＊Power Limit = 30 - 2.55 = 27.45 dBm

IEEE 802.11n 40 MHz / IEEE 802.11ac 20 MHz / IEEE 802.11ac 40 MHz / IEEE 802.11ac 80 MHz


Band I / Band II-A / Band II-C

＊Power Limit = 24 - 2.55 = 21.45 dBm

Band III

＊Power Limit = 30 - 2.55 = 27.45 dBm

測試架構圖 ：

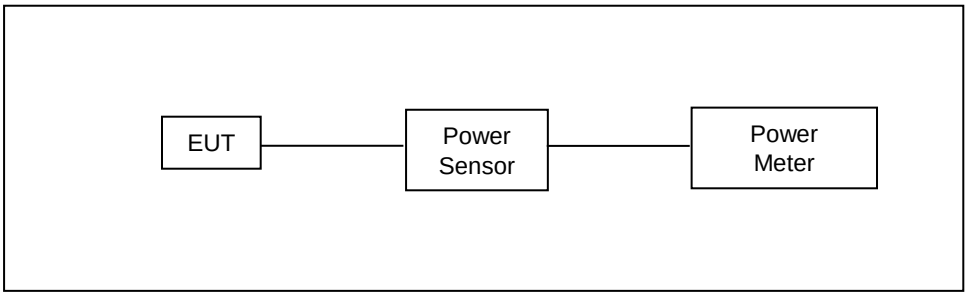

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

   (1) 供戶外操作使用:
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
   - 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

   (2) 供室內操作使用:
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

   (3) 供固定式點對點操作使用:
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
   - 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
   - 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

   (4) 供行動或可攜式裝置操作使用:
   - 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
   - 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

   (1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

   (2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

   (1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

   (2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

   (3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定：
   (1) 應將量測儀器直接連接待測物，以傳導方式執行。
   (2) 5.15 GHz～5.25 GHz、5.25 GHz～5.35 GHz 及 5.47 GHz～5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或或待測物之 26 dB 發射頻寬，兩者取較小者。
   (3) 5.725 GHz～5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。
   (4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

CDD/MIMO mode：

Directional Gain = 10*log{[10^(G1/20)+10^(G2/20)+…+10^(Gn/20)]^2/NANT} = 8.55 dBi > 6 dBi


Band I / Band II-A / Band II-C

＊Power Limit = 11 - 2.55 = 8.45 dBm/MHz

Band III

＊Power Limit = 30 - 2.55 = 27.45 dBm/MHz

測試架構圖 ：

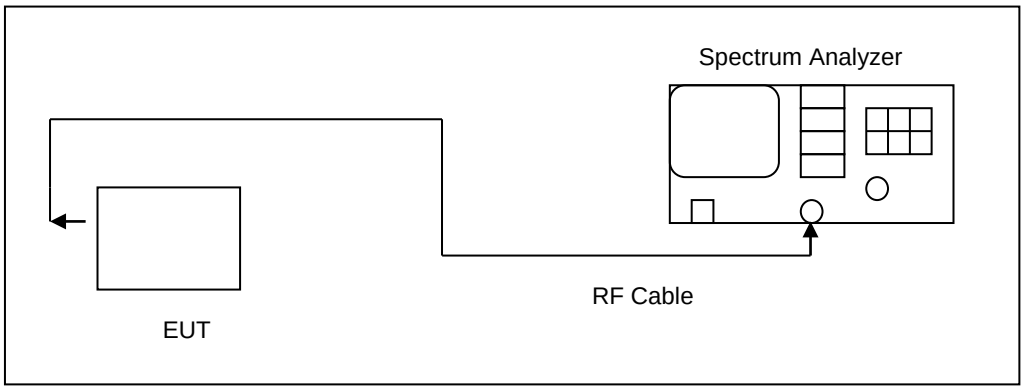


4.3.4 26 dB頻寬之要求

合格標準:

N/A

測試架構圖 :

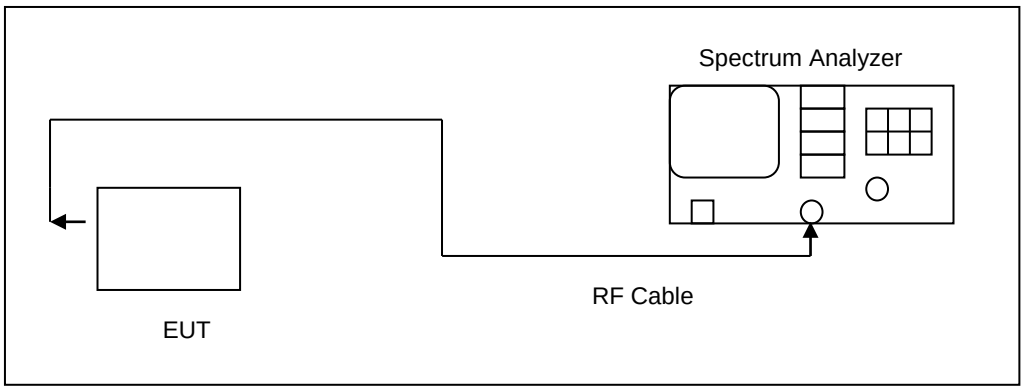


4.3.5 6 dB頻寬之要求

合格標準:

在 5.725 GHz～5.850 GHz 頻帶操作之設備，其 6 dB 頻寬至少應有 500 kHz。

測試架構圖 :

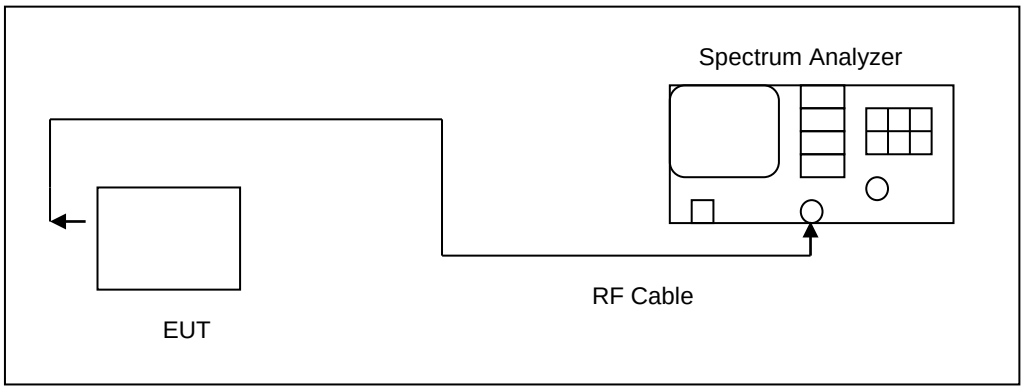


4.3.6 發射功率控制(TPC)之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.1 節之要求, 發射功率控制(TPC)操作於 5.25 GHz～5.35 GHz 與 5.470 GHz～5.725 GHz 頻帶的設備，應具備發射功率控制功能。設備必須至少具有 6 dB 低於平均 EIRP 值 30 dBm 的能力。EIRP 值低於 500 mW 之系統不須具備 TPC 功能。

測試架構圖 ：

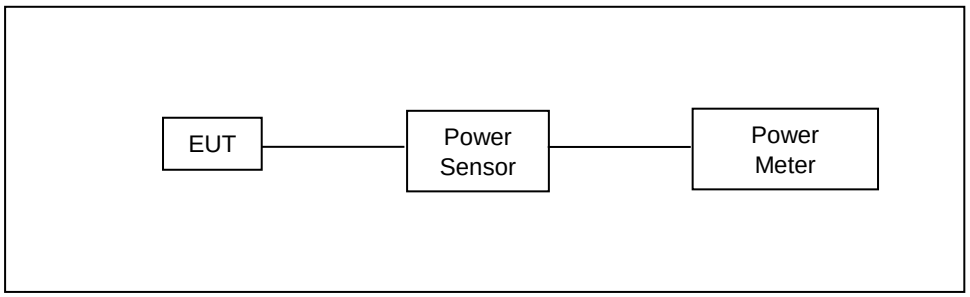

4.3.7 動態頻率選擇(DFS)之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.2 節之要求, 操作於 5.25 GHz～5.35 GHz 與 5.470 GHz～5.725 GHz 頻帶之設備應具備動態頻率選擇雷達偵測功能並啟動之，以完整偵測使用頻帶內之雷達訊號，避免與雷達系統同頻道操作。相關規定如下：


最低動態頻率選擇的偵測門檻

- 最大 EIRP 為 200 mW 至 1 W 之設備，其最低動態頻率選擇的偵測門檻值為-64 dBm。
- 最大 EIRP 低於 200 mW，且功率頻譜密度小於 10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-62 dBm。
- 最大 EIRP 低於 200 mW，且功率頻譜密度大於或等於 10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-64dBm。
- 此偵測門檻值為 1 微秒內之平均接收功率，並以 0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用者手動選取。

操作模式：動態頻率選擇之規定適用於以下之操作模式：

- 頻道可用性檢查時間之規定，適用於主控運作模式。
- 頻道移動時間之規定，適用於主控及受控運作模式。

測試架構圖 :

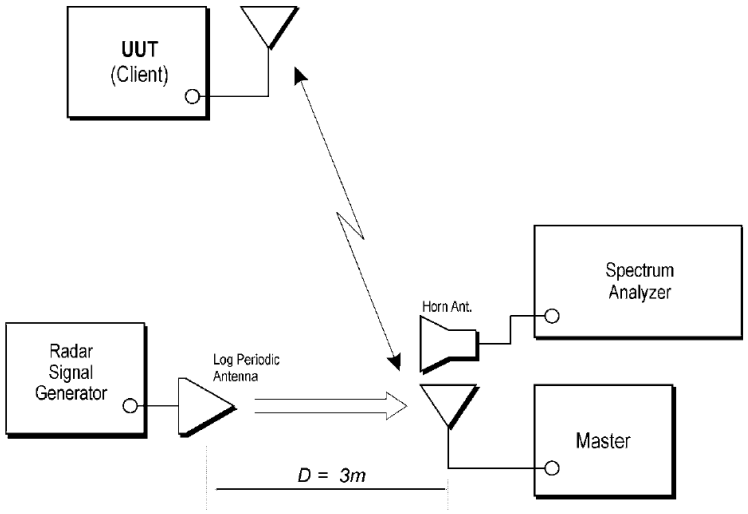


4.3.8 頻道可用性檢查時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(3)節之要求, 設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在 60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達信號時，設備才可開始使用該頻道。

測試架構圖 :

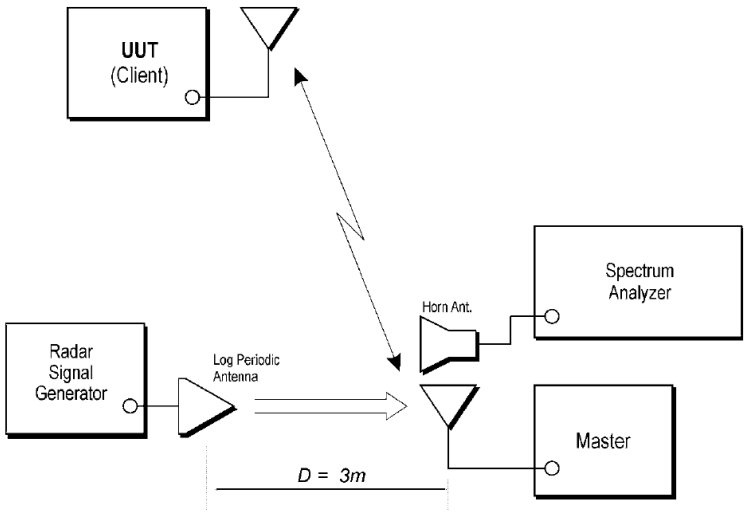


4.3.9 頻道移動時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(4)節之要求, 在偵測到雷達的存在後，所有在該操作頻道上的所有傳輸須在 10 秒內停止，在偵測到雷達信號後，該期間內的傳輸應維持最多 200 毫秒的正常通訊。另外，間歇性的管理與控制信號可在剩餘的時間中傳送，以便撤離該操作頻道。

測試架構圖 :

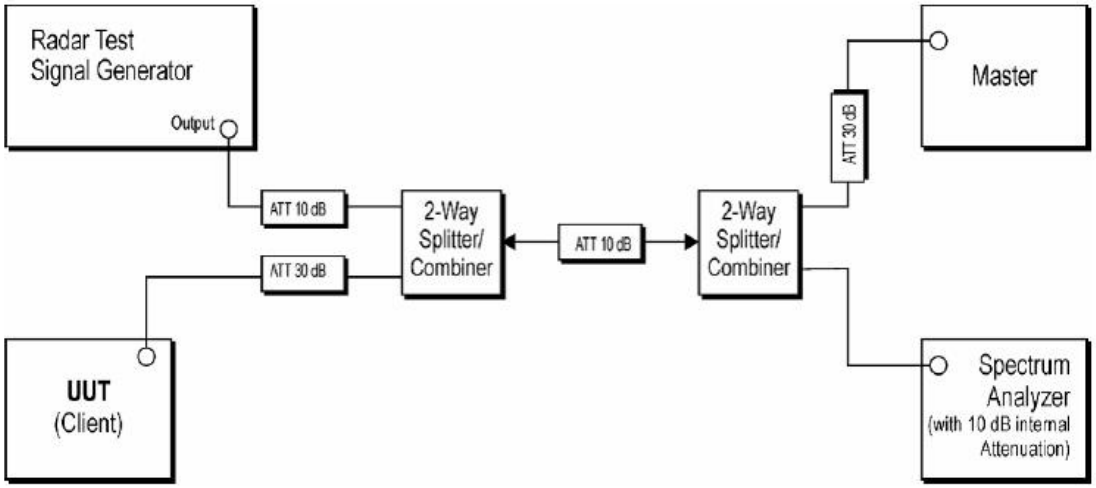


Product		Manufacturer	Model No.	ID
1.	AP Router	NETGEAR	AC2600-R7800	NCC：CCAJ16LP0910T1

4.3.10 不可佔用時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(5)節之要求，某一頻道已被頻道可用性檢查或”服務中”監視顯示含有雷達系統，至少須有 30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

測試架構圖 :

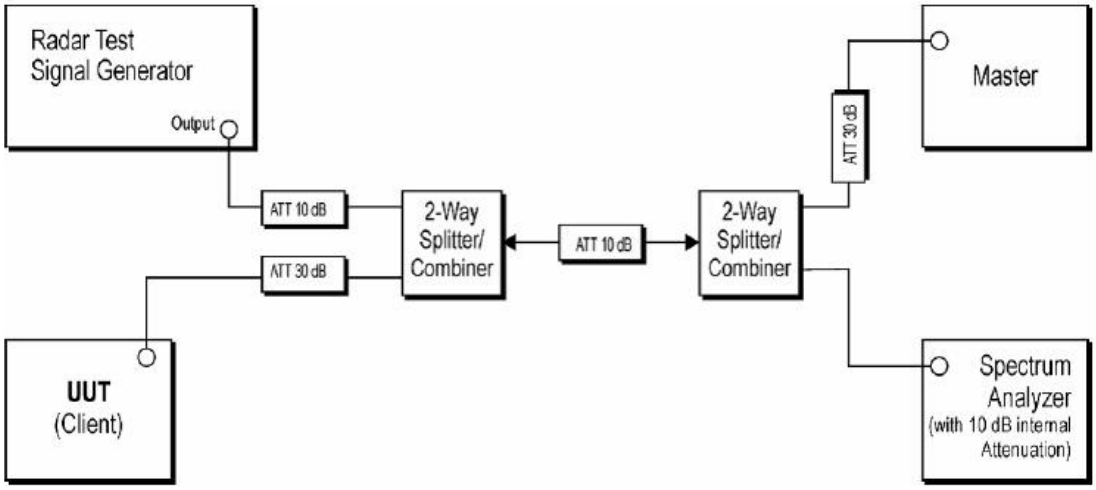

4.3.11 天線規格之要求

合格標準:

據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.8 節之要求，天線之規格不受第 3.2 節規定之限制

判定結果: 符合。

4.3.12 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～3.0	614	1.63	*100	6
3～30	1842/f	4.89/f	$*900/f^2$	6
30～300	61.4	0.163	1.0	6
300～1,500	-----	-----	f/300	6
1,500～100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～1.34	614	1.63	*100	30
1.34～30	824/F	2.19/F	$*180/F^2$	30
30～300	27.5	0.073	0.2	30
300～1,500	-----	-----	F/1500	30
1,500～100,000	-----	-----	1.0	30


註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

5. Test Results

Annex A. Conducted Emission

Dipole Antenna


Standard:	LP0002	Line:	L1
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

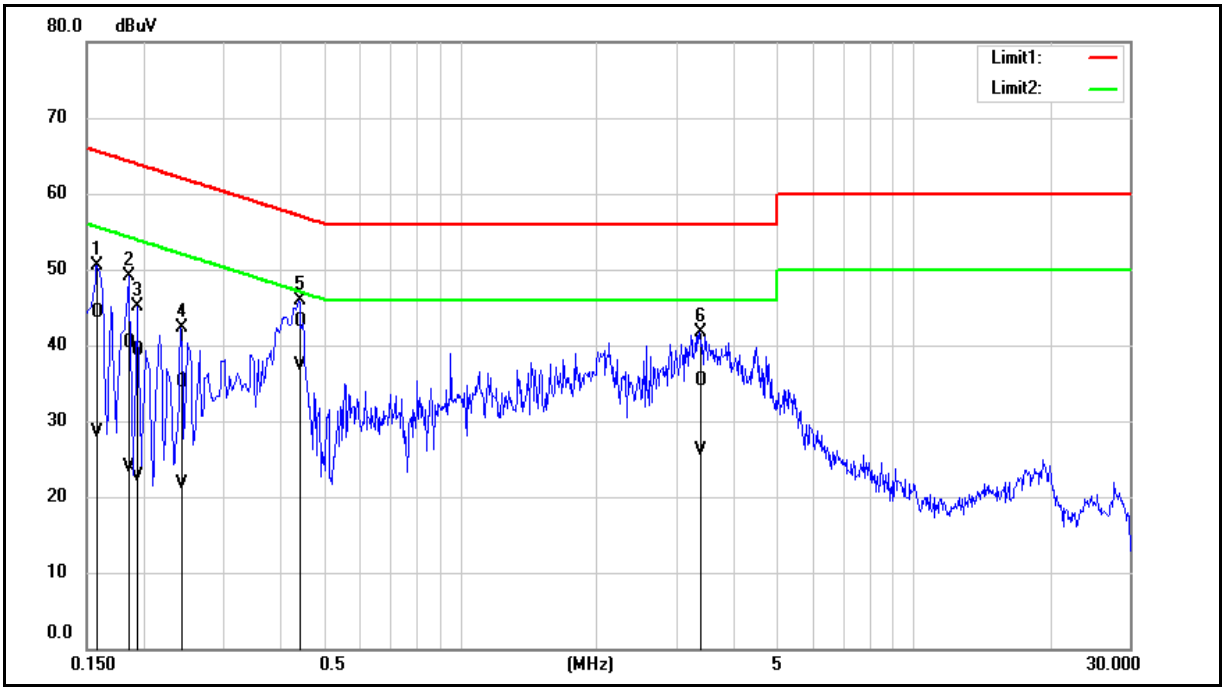

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	34.49	18.70	9.74	44.23	28.44	65.57	55.57	-21.34	-27.13	Pass
2	0.1860	30.50	14.20	9.74	40.24	23.94	64.21	54.21	-23.97	-30.27	Pass
3	0.1940	29.47	13.00	9.74	39.21	22.74	63.86	53.86	-24.65	-31.12	Pass
4	0.2420	25.29	11.97	9.74	35.03	21.71	62.03	52.03	-27.00	-30.32	Pass
5	0.4420	33.45	27.61	9.74	43.19	37.35	57.02	47.02	-13.83	-9.67	Pass
6	3.3740	25.52	16.30	9.83	35.35	26.13	56.00	46.00	-20.65	-19.87	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Standard:	LP0002	Line:	N
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

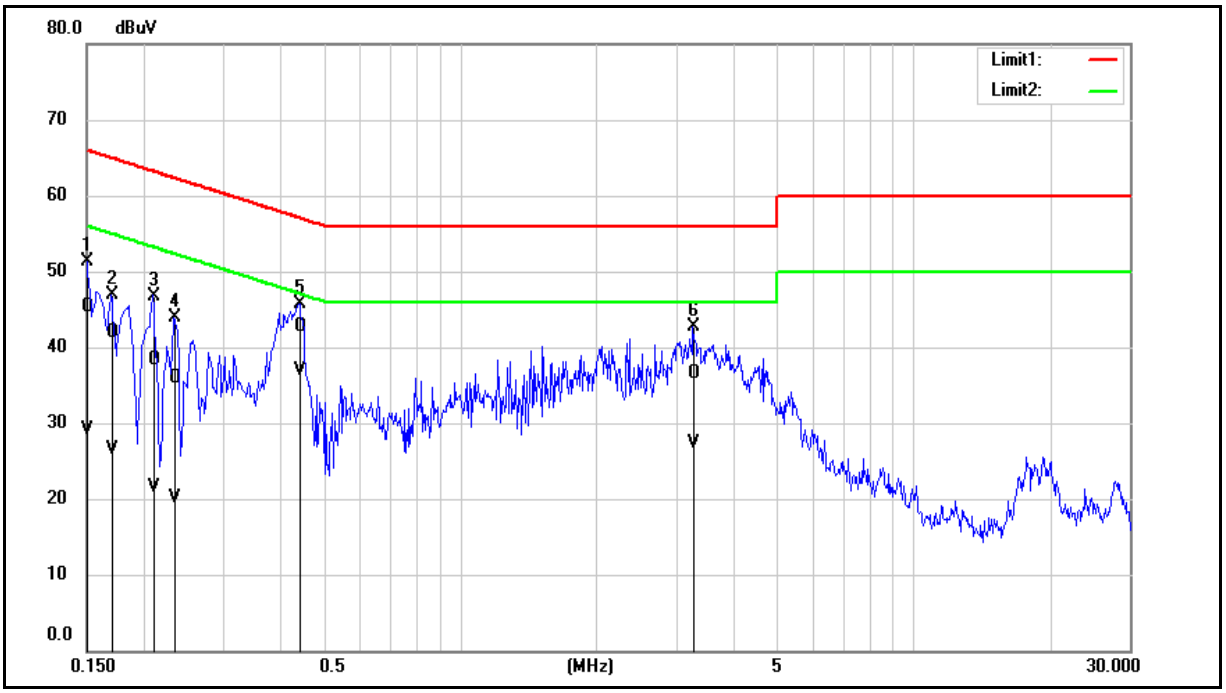


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	35.50	19.31	9.74	45.24	29.05	66.00	56.00	-20.76	-26.95	Pass
2	0.1700	32.26	16.81	9.74	42.00	26.55	64.96	54.96	-22.96	-28.41	Pass
3	0.2100	28.50	11.75	9.73	38.23	21.48	63.21	53.21	-24.98	-31.73	Pass
4	0.2340	26.16	10.28	9.73	35.89	20.01	62.31	52.31	-26.42	-32.30	Pass
5	0.4420	33.06	27.22	9.73	42.79	36.95	57.02	47.02	-14.23	-10.07	Pass
6	3.2740	26.67	17.55	9.83	36.50	27.38	56.00	46.00	-19.50	-18.62	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

PIFA Antenna


Standard:	LP0002	Line:	L1
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

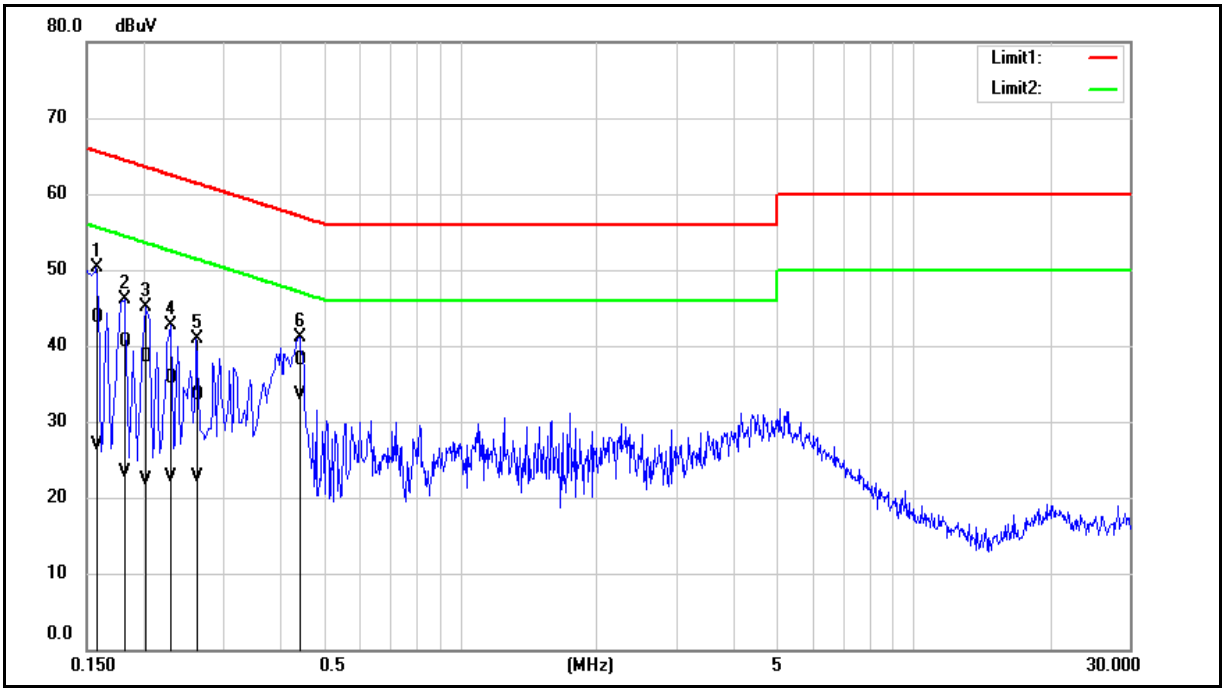

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	33.89	17.13	9.74	43.63	26.87	65.57	55.57	-21.94	-28.70	Pass
2	0.1820	30.67	13.61	9.74	40.41	23.35	64.39	54.39	-23.98	-31.04	Pass
3	0.2020	28.73	12.53	9.74	38.47	22.27	63.53	53.53	-25.06	-31.26	Pass
4	0.2300	25.89	12.98	9.74	35.63	22.72	62.45	52.45	-26.82	-29.73	Pass
5	0.2620	23.81	12.87	9.74	33.55	22.61	61.37	51.37	-27.82	-28.76	Pass
6	0.4420	28.44	23.69	9.74	38.18	33.43	57.02	47.02	-18.84	-13.59	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Standard:	LP0002	Line:	N
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

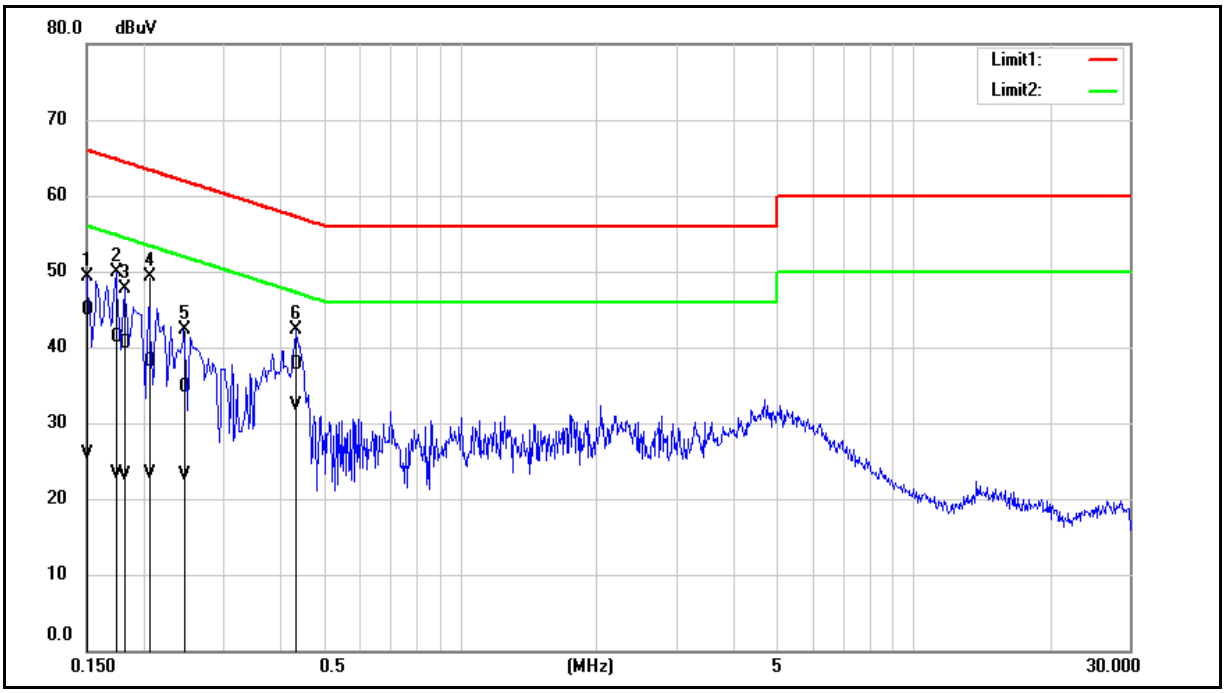

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	35.17	16.17	9.74	44.91	25.91	66.00	56.00	-21.09	-30.09	Pass
2	0.1740	31.52	13.52	9.74	41.26	23.26	64.77	54.77	-23.51	-31.51	Pass
3	0.1820	30.71	13.38	9.73	40.44	23.11	64.39	54.39	-23.95	-31.28	Pass
4	0.2060	28.46	13.56	9.73	38.19	23.29	63.37	53.37	-25.18	-30.08	Pass
5	0.2460	25.05	13.41	9.73	34.78	23.14	61.89	51.89	-27.11	-28.75	Pass
6	0.4340	27.88	22.64	9.73	37.61	32.37	57.18	47.18	-19.57	-14.81	Pass


註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Annex B. Radiated Emission Measurement (2.4 GHz)

Dipole Antenna

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

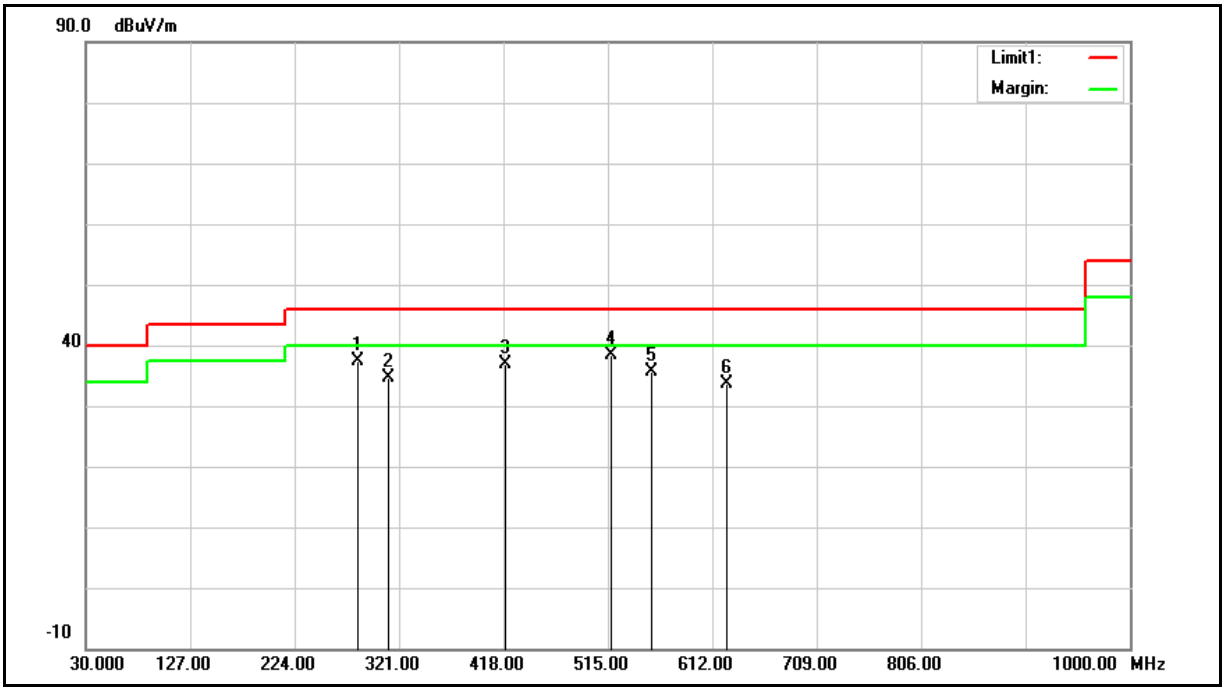

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	282.2000	43.49	-6.23	37.26	46.00	-8.74	QP
2	311.3000	40.19	-5.64	34.55	46.00	-11.45	QP
3	419.9400	40.39	-3.58	36.81	46.00	-9.19	QP
4	517.9100	40.50	-2.23	38.27	46.00	-7.73	QP
5	555.7400	37.05	-1.39	35.66	46.00	-10.34	QP
6	625.5800	33.79	-0.04	33.75	46.00	-12.25	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 37.26 = -6.23 + 43.49

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

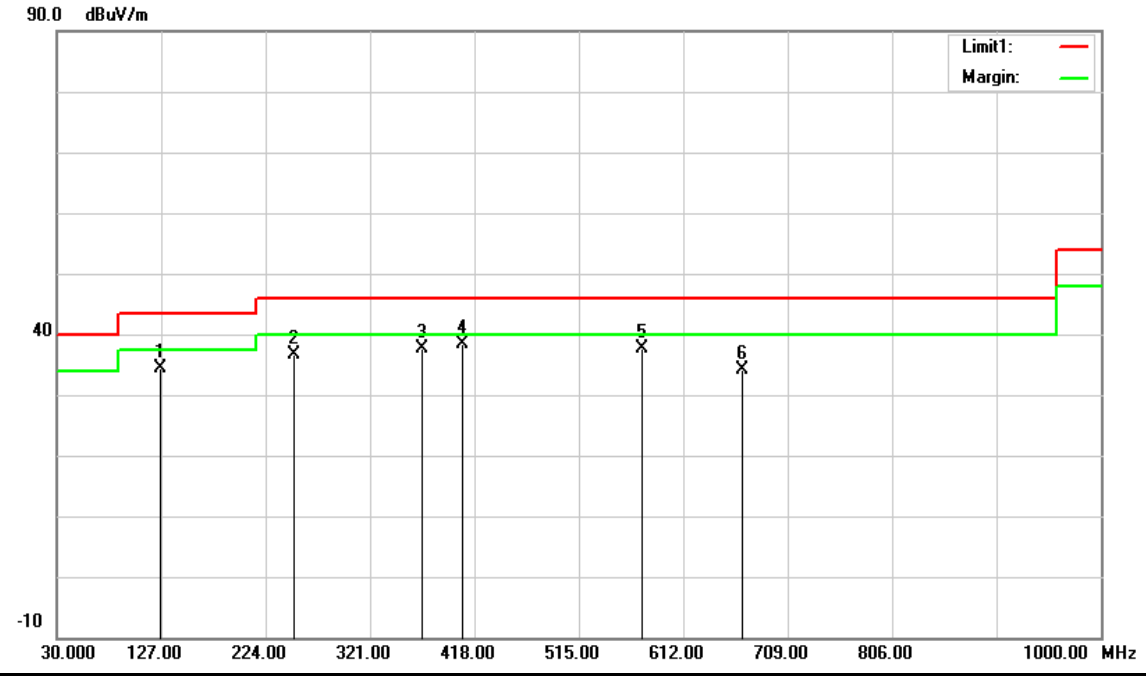

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	126.0300	43.57	-9.20	34.37	43.50	-9.13	QP
2	250.1900	44.09	-7.44	36.65	46.00	-9.35	QP
3	369.5000	42.08	-4.57	37.51	46.00	-8.49	QP
4	407.3300	42.11	-3.79	38.32	46.00	-7.68	QP
5	574.1700	38.61	-0.92	37.69	46.00	-8.31	QP
6	666.3200	33.73	0.42	34.15	46.00	-11.85	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 34.37 = -9.20 + 43.57

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

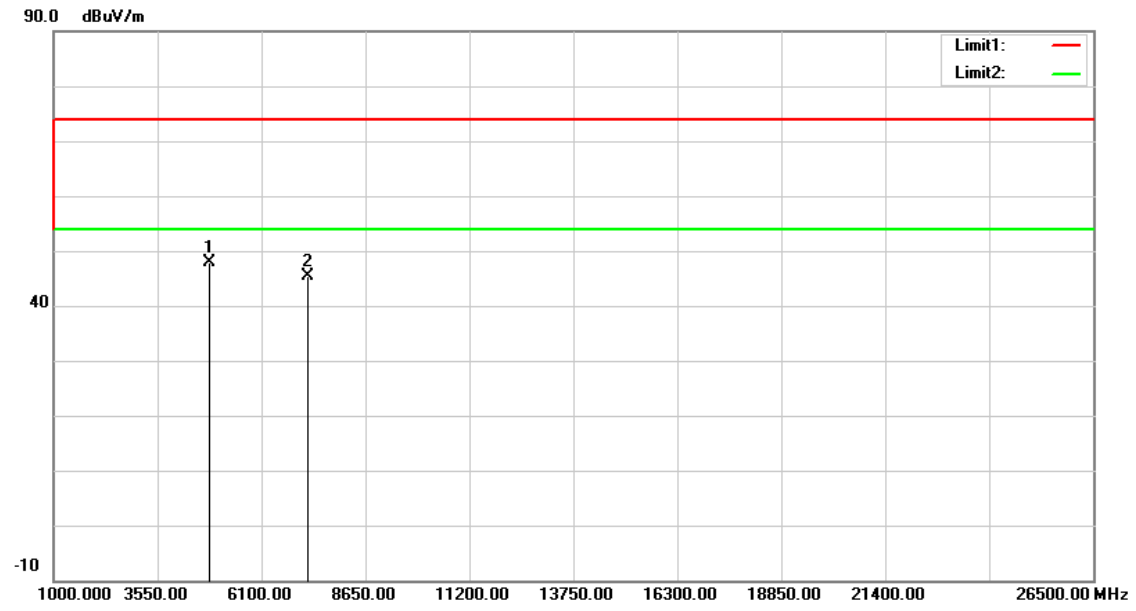

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	45.09	2.72	47.81	74.00	-26.19	peak
2	7236.000	36.97	8.30	45.27	74.00	-28.73	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.81 = 2.72 + 45.09

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

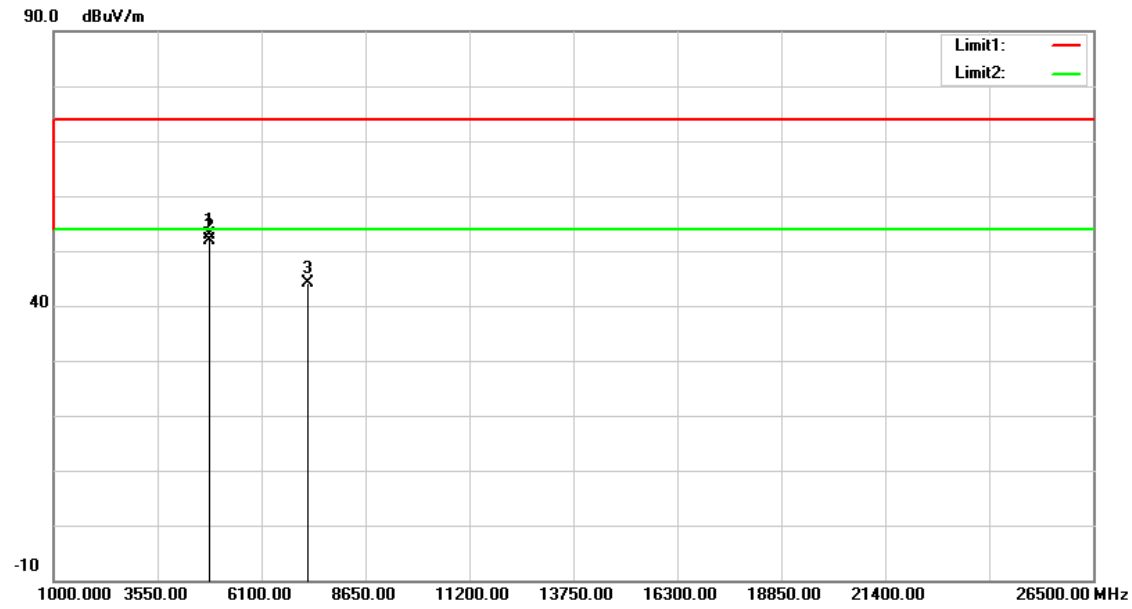

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	50.24	2.72	52.96	74.00	-21.04	peak
2	4824.000	49.10	2.72	51.82	54.00	-2.18	AVG
3	7236.000	35.85	8.30	44.15	74.00	-29.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 52.96 = 2.72 + 50.24

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

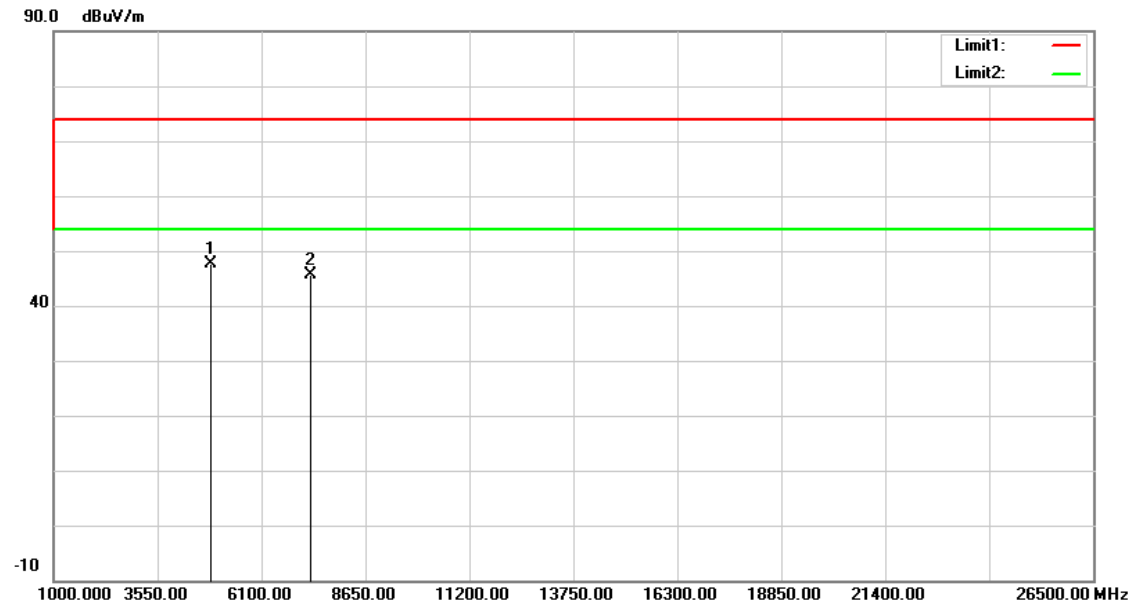


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	44.77	2.84	47.61	74.00	-26.39	peak
2	7311.000	37.14	8.53	45.67	74.00	-28.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

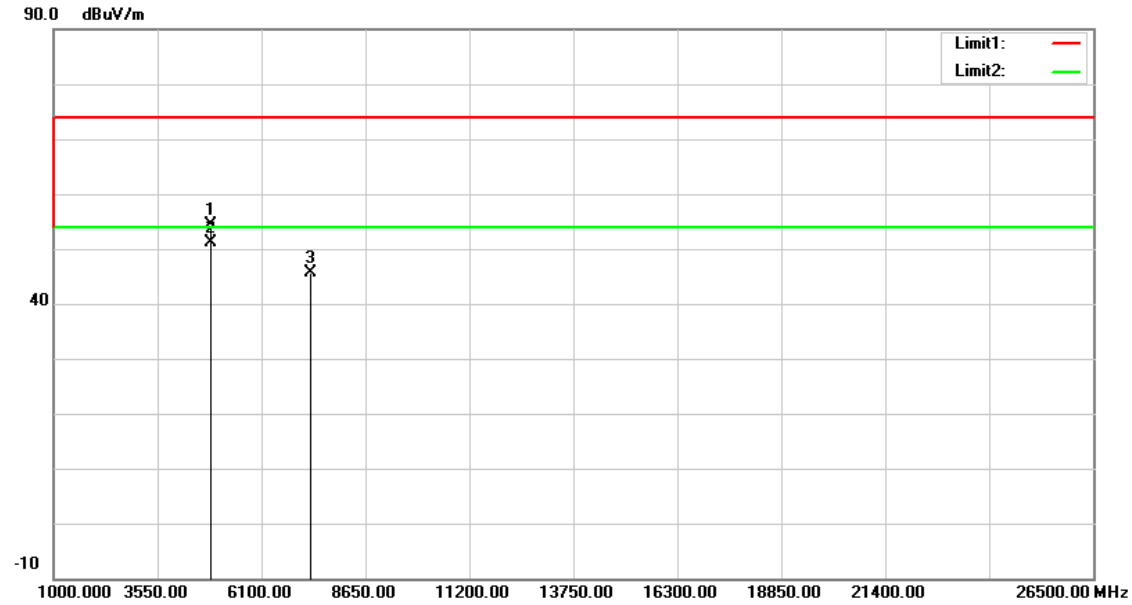


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	51.58	2.84	54.42	74.00	-19.58	peak
2	4874.000	48.40	2.84	51.24	54.00	-2.76	AVG
3	7311.000	37.04	8.53	45.57	74.00	-28.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

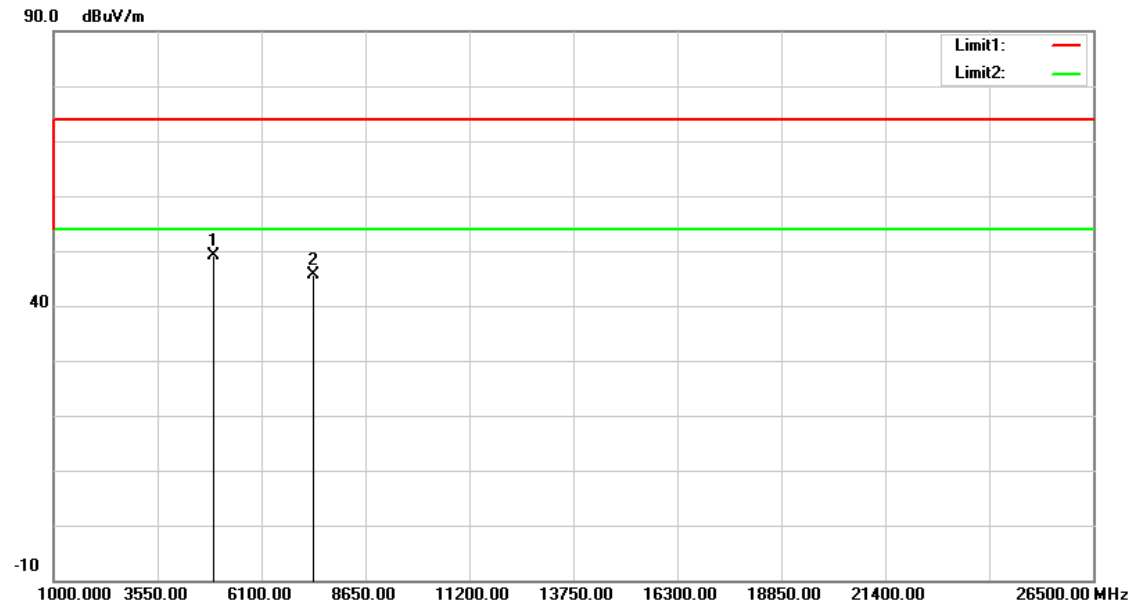


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	46.05	2.96	49.01	74.00	-24.99	peak
2	7386.000	36.80	8.77	45.57	74.00	-28.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

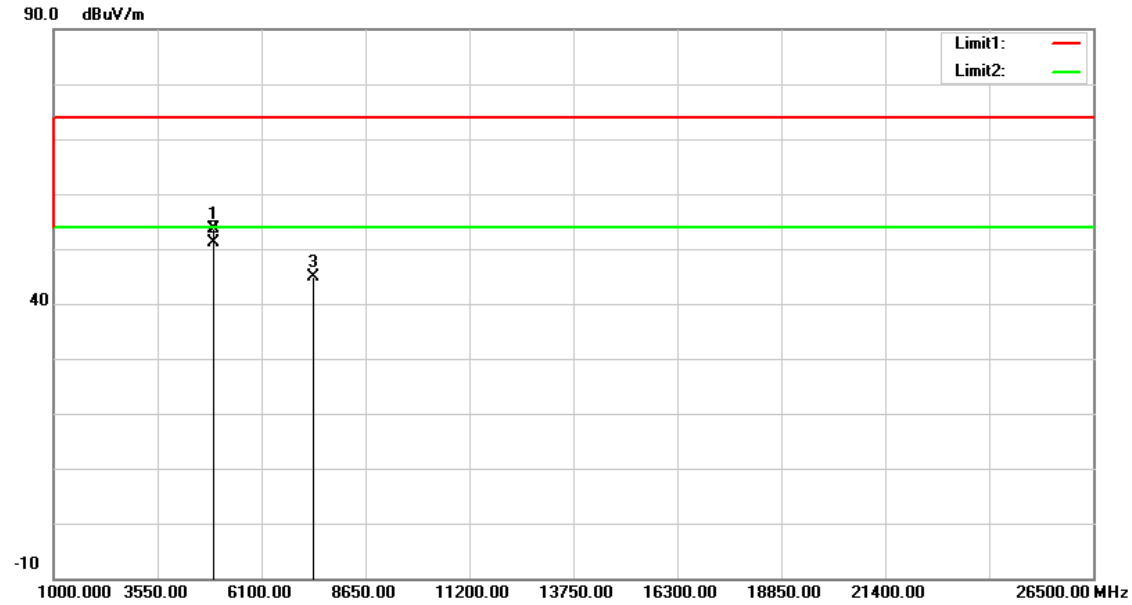


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	50.55	2.96	53.51	74.00	-20.49	peak
2	4924.000	48.25	2.96	51.21	54.00	-2.79	AVG
3	7386.000	36.09	8.77	44.86	74.00	-29.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

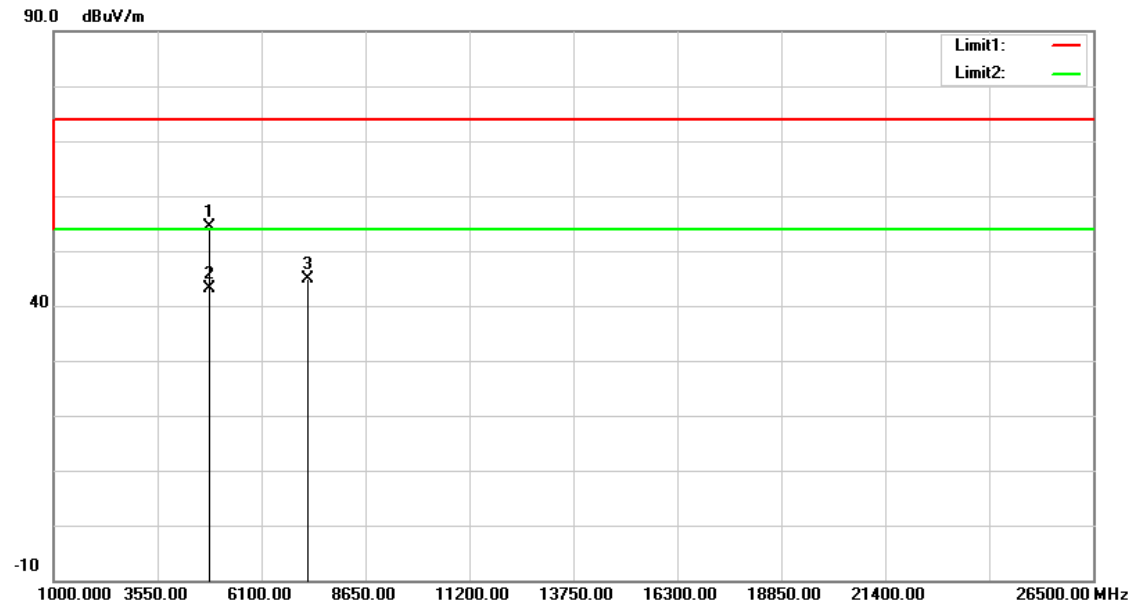


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	51.56	2.72	54.28	74.00	-19.72	peak
2	4824.000	40.52	2.72	43.24	54.00	-10.76	AVG
3	7236.000	36.57	8.30	44.87	74.00	-29.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

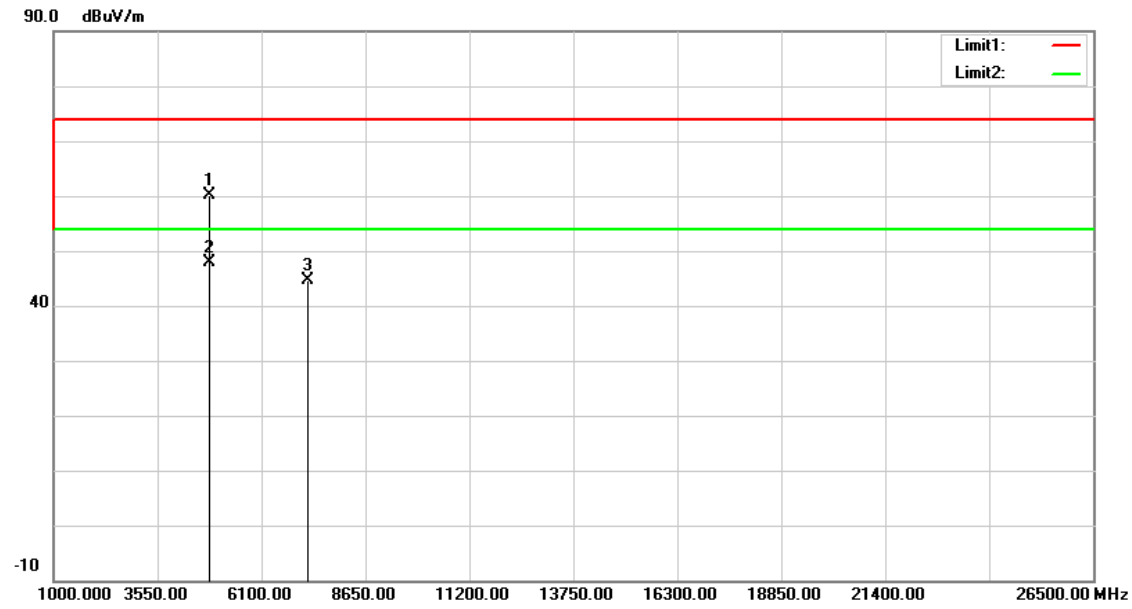


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	57.45	2.72	60.17	74.00	-13.83	peak
2	4824.000	45.26	2.72	47.98	54.00	-6.02	AVG
3	7236.000	36.30	8.30	44.60	74.00	-29.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

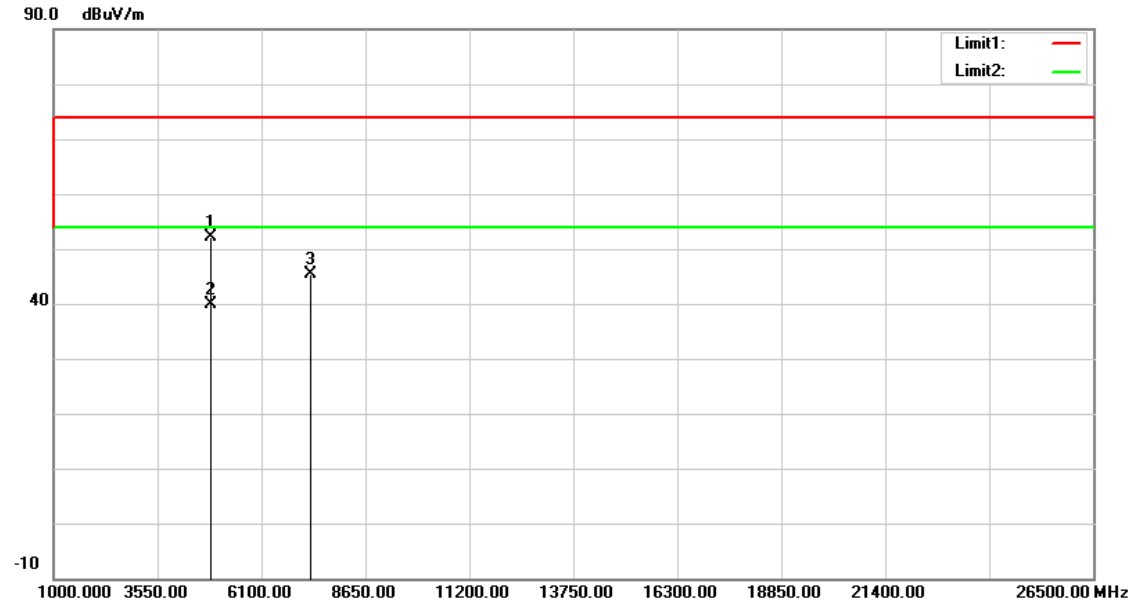


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.38	2.84	52.22	74.00	-21.78	peak
2	4874.000	37.00	2.84	39.84	54.00	-14.16	AVG
3	7311.000	36.77	8.53	45.30	74.00	-28.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

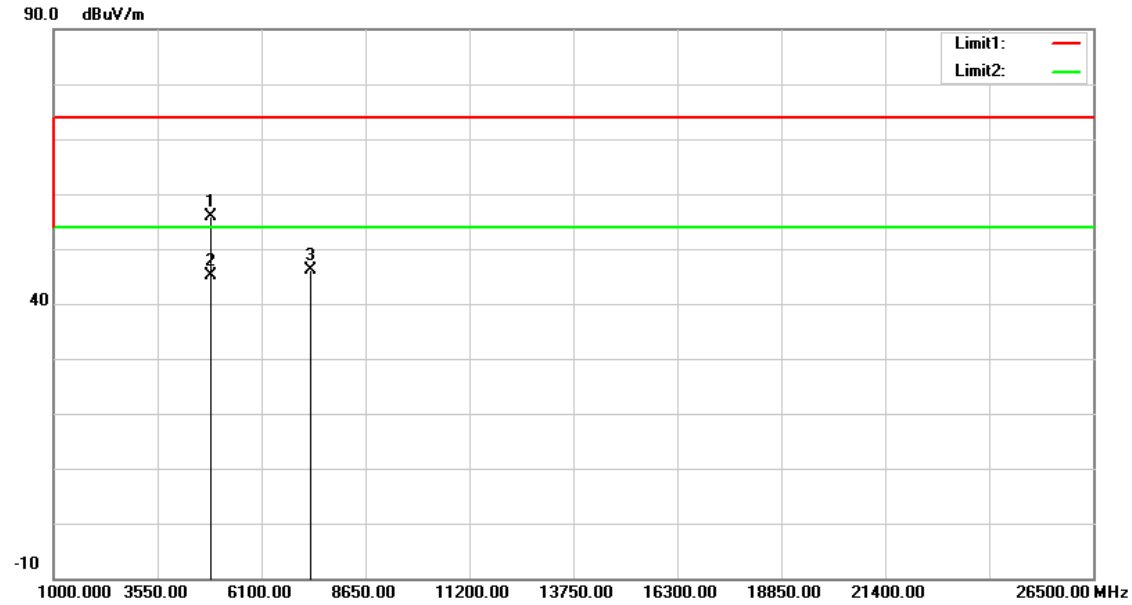


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	53.13	2.84	55.97	74.00	-18.03	peak
2	4874.000	42.30	2.84	45.14	54.00	-8.86	AVG
3	7311.000	37.70	8.53	46.23	74.00	-27.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

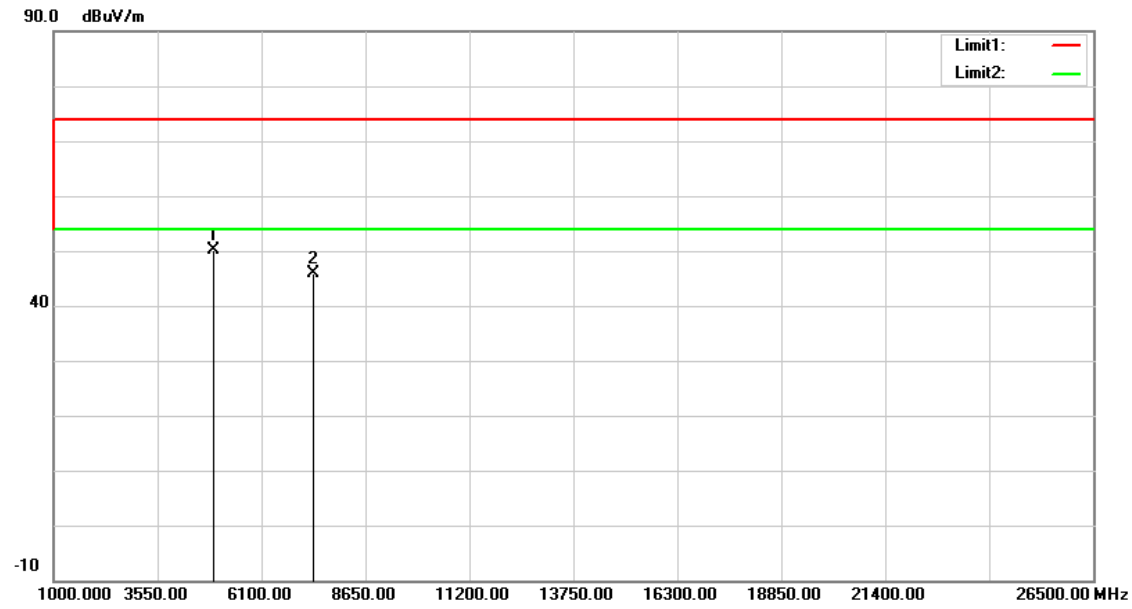


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	47.06	2.96	50.02	74.00	-23.98	peak
2	7386.000	37.11	8.77	45.88	74.00	-28.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

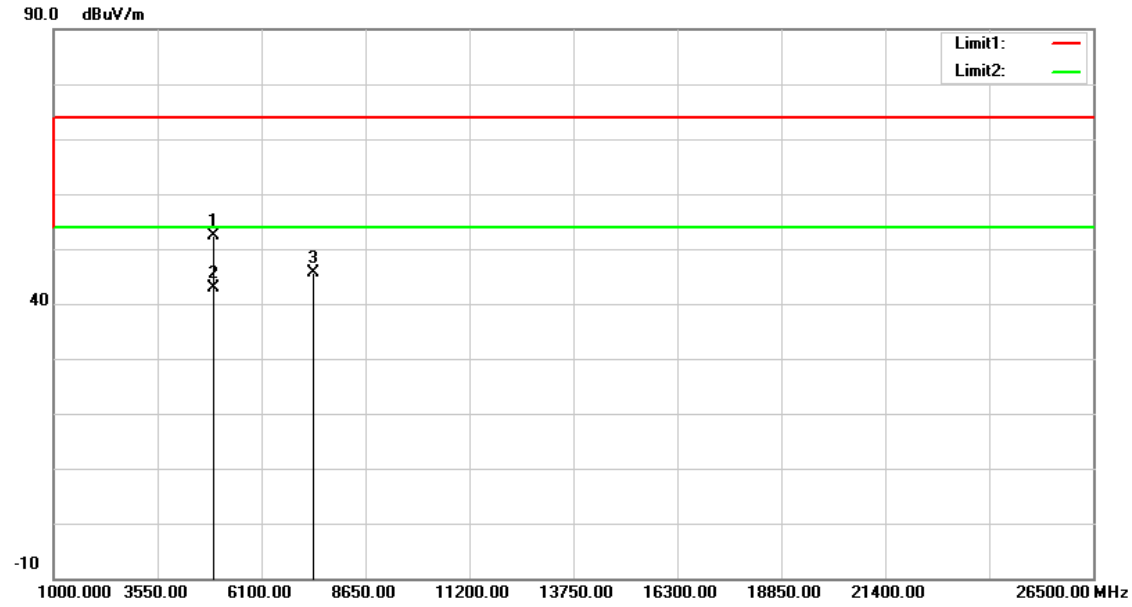


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	49.45	2.96	52.41	74.00	-21.59	peak
2	4924.000	39.81	2.96	42.77	54.00	-11.23	AVG
3	7386.000	36.87	8.77	45.64	74.00	-28.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

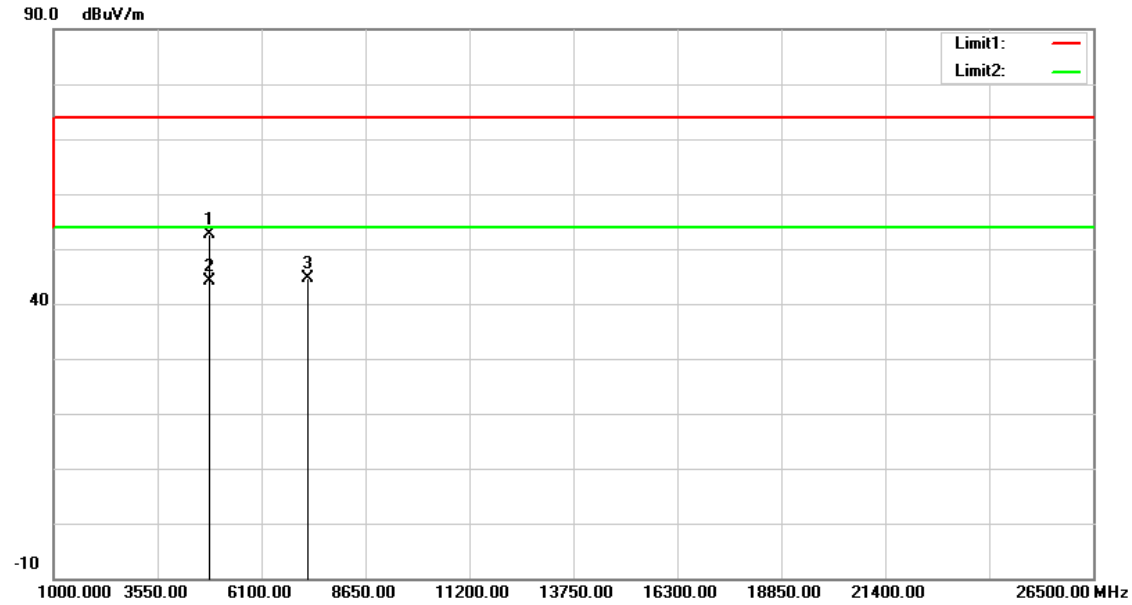


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	49.81	2.72	52.53	74.00	-21.47	peak
2	4824.000	41.34	2.72	44.06	54.00	-9.94	AVG
3	7236.000	36.39	8.30	44.69	74.00	-29.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

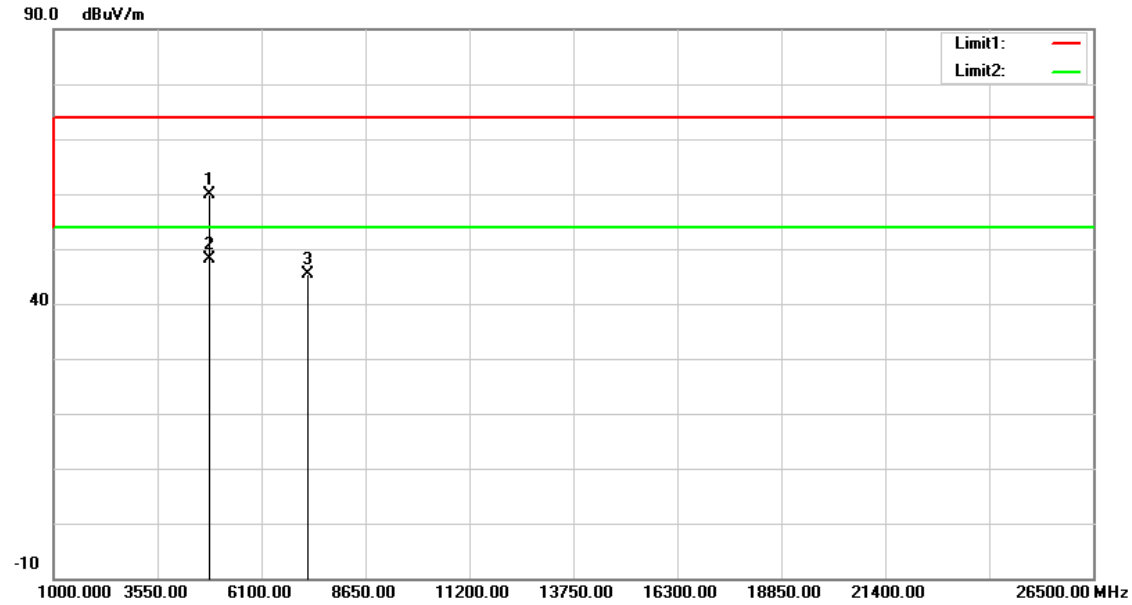


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	57.22	2.72	59.94	74.00	-14.06	peak
2	4824.000	45.34	2.72	48.06	54.00	-5.94	AVG
3	7236.000	36.97	8.30	45.27	74.00	-28.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

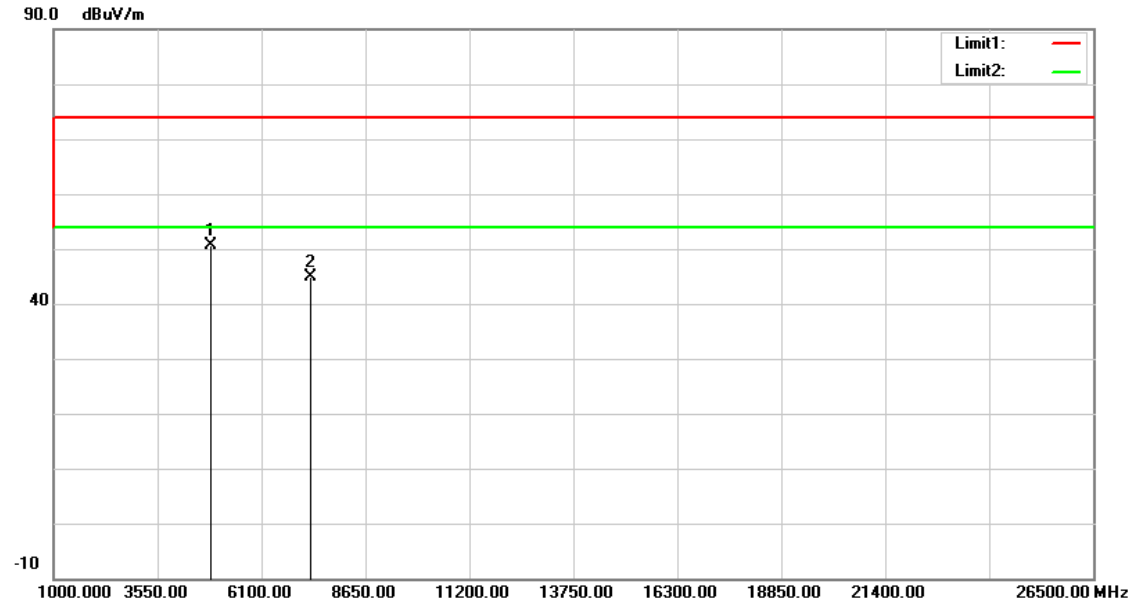


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	47.72	2.84	50.56	74.00	-23.44	peak
2	7311.000	36.46	8.53	44.99	74.00	-29.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

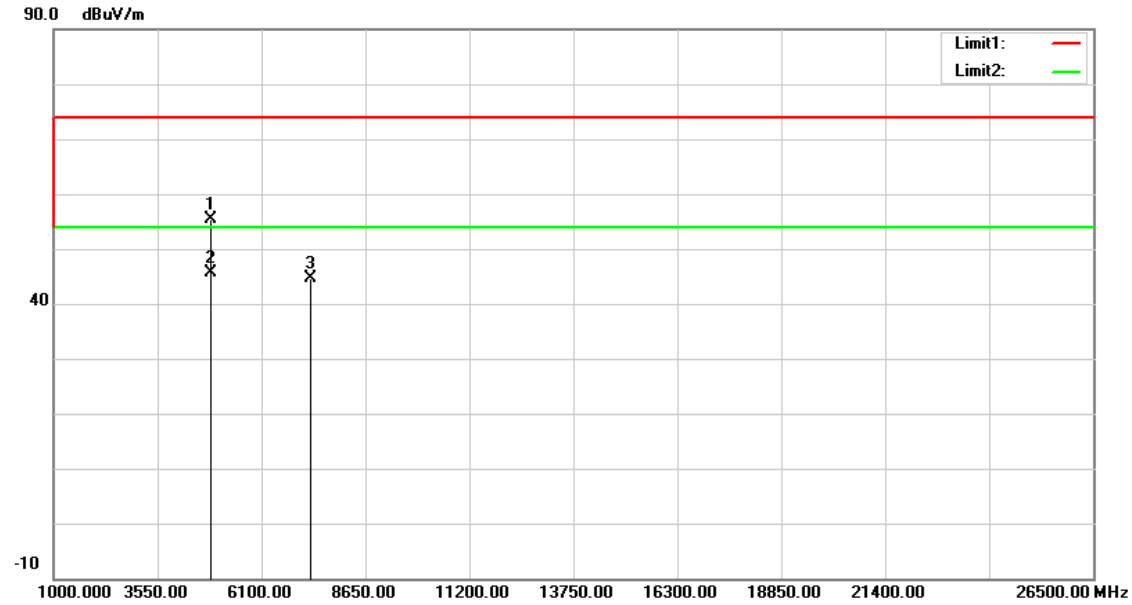


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	52.56	2.84	55.40	74.00	-18.60	peak
2	4874.000	42.84	2.84	45.68	54.00	-8.32	AVG
3	7311.000	35.98	8.53	44.51	74.00	-29.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

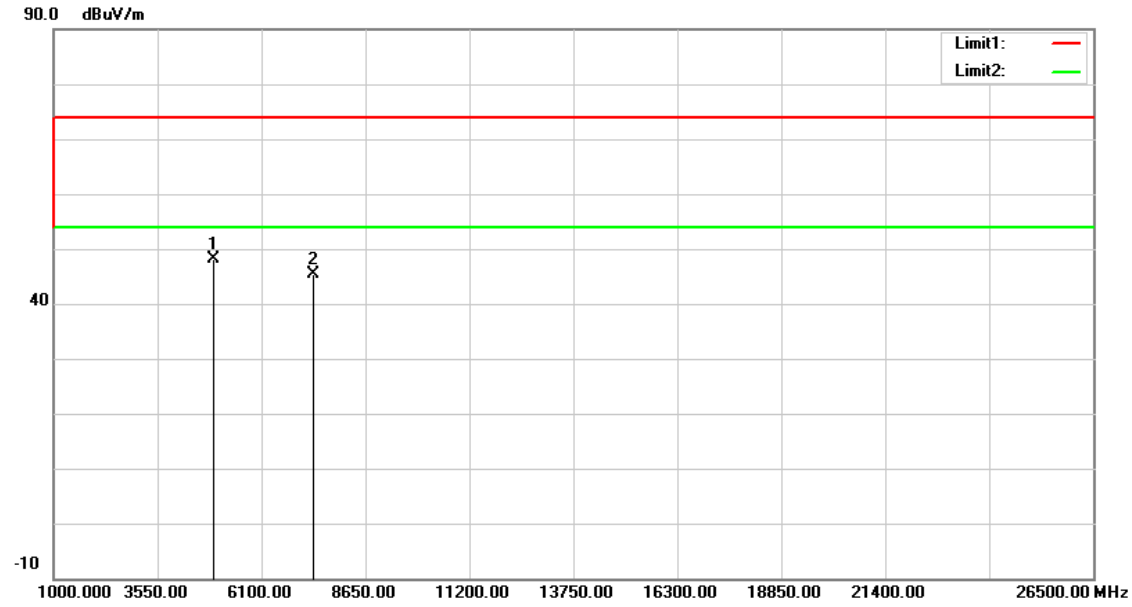


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	45.07	2.96	48.03	74.00	-25.97	peak
2	7386.000	36.53	8.77	45.30	74.00	-28.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

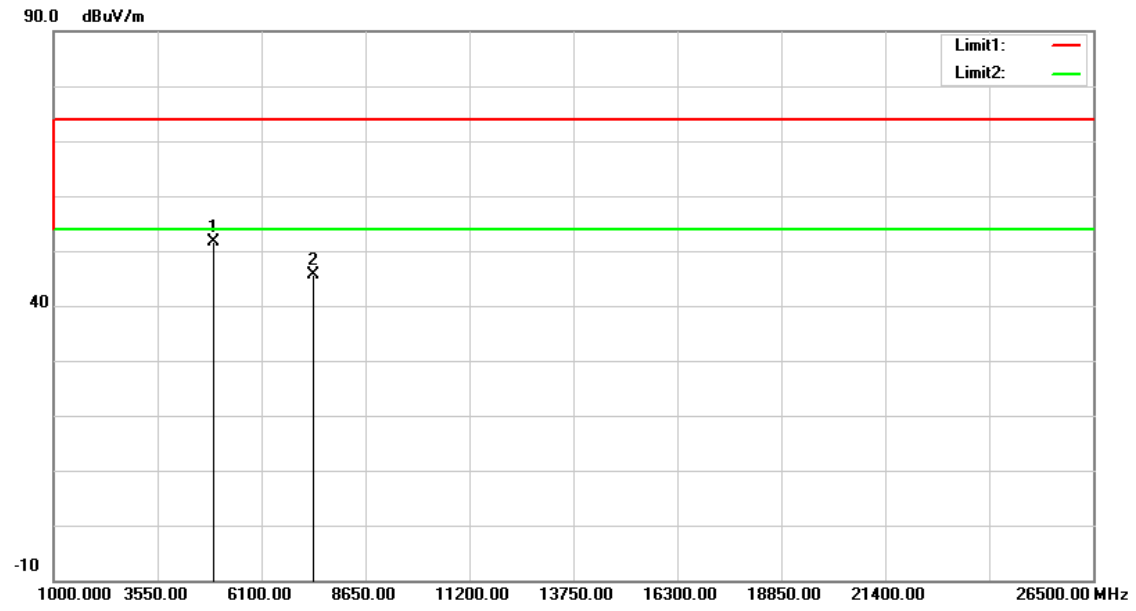


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.76	2.96	51.72	74.00	-22.28	peak
2	7386.000	36.77	8.77	45.54	74.00	-28.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

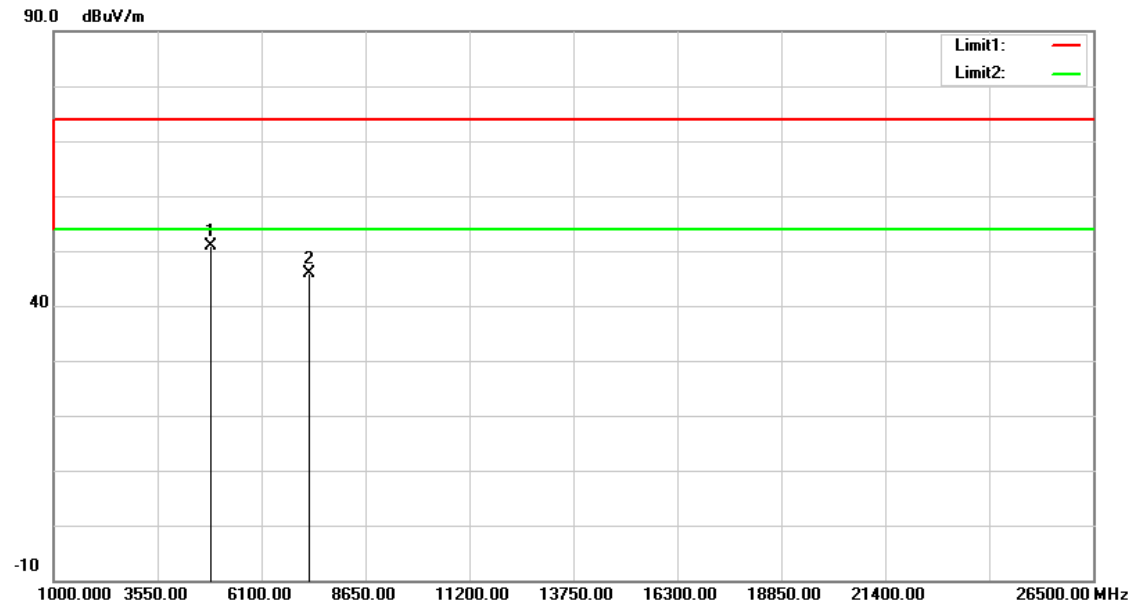


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	48.17	2.78	50.95	74.00	-23.05	peak
2	7266.000	37.58	8.39	45.97	74.00	-28.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

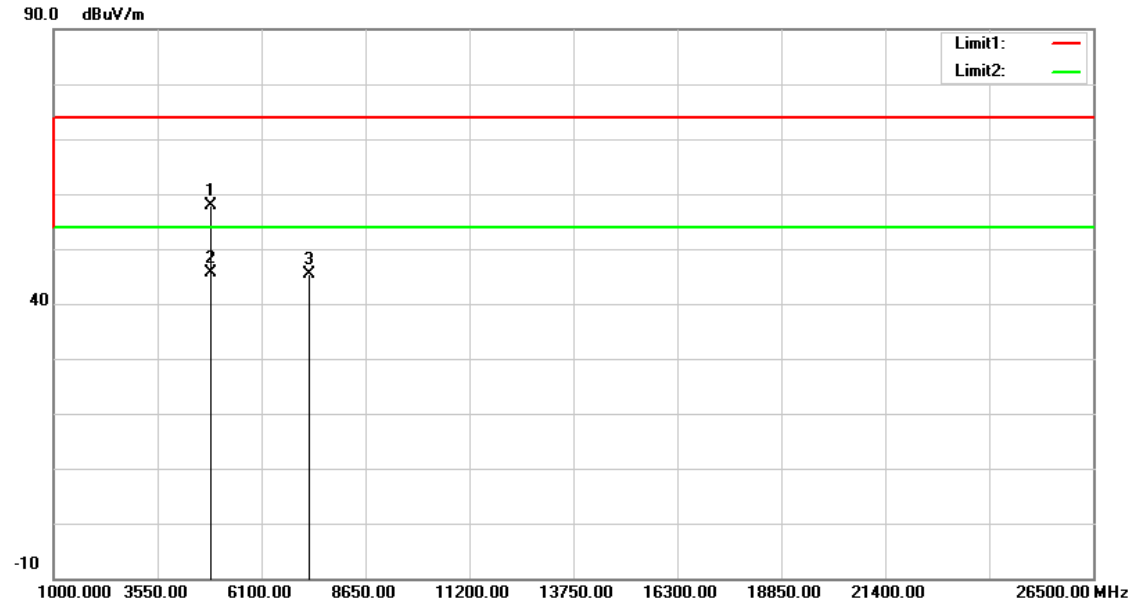


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	55.12	2.78	57.90	74.00	-16.10	peak
2	4844.000	42.77	2.78	45.55	54.00	-8.45	AVG
3	7266.000	36.87	8.39	45.26	74.00	-28.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

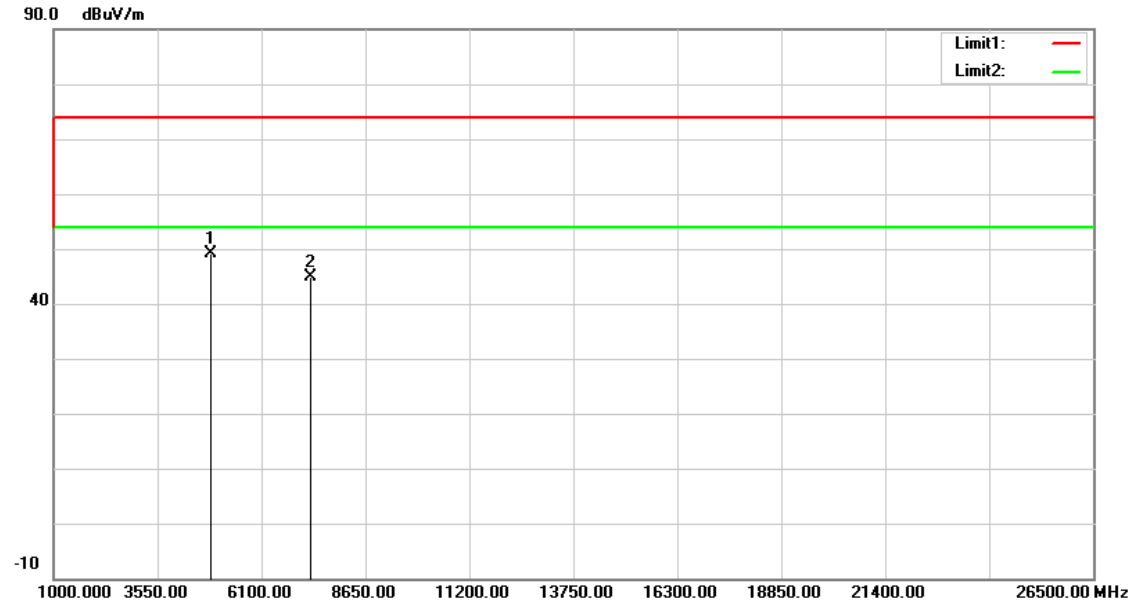


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	46.35	2.84	49.19	74.00	-24.81	peak
2	7311.000	36.44	8.53	44.97	74.00	-29.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

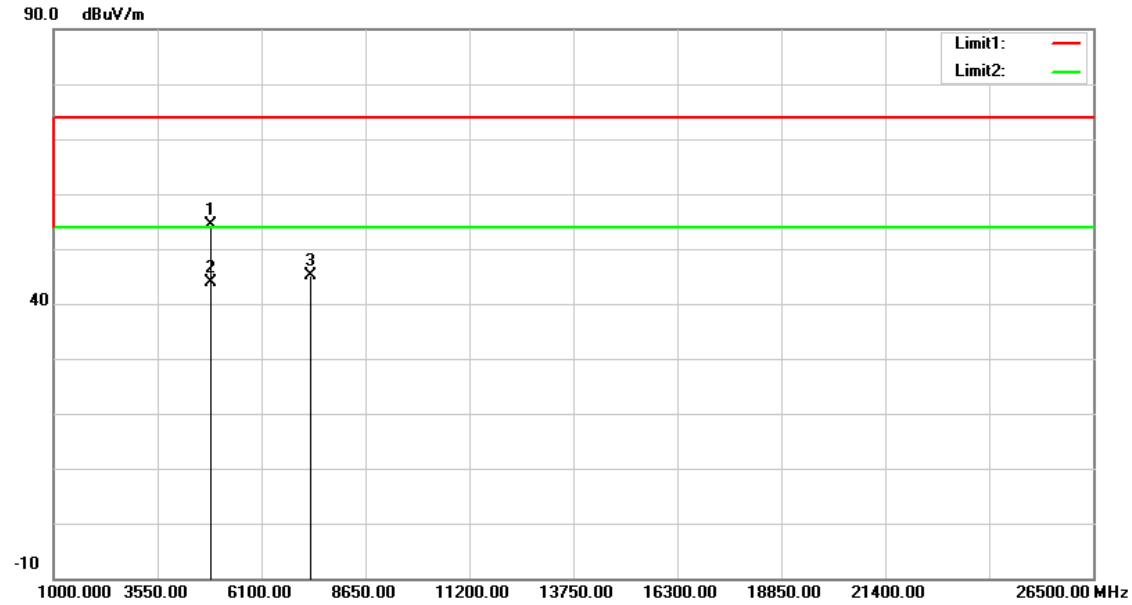


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	51.64	2.84	54.48	74.00	-19.52	peak
2	4874.000	40.95	2.84	43.79	54.00	-10.21	AVG
3	7311.000	36.72	8.53	45.25	74.00	-28.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

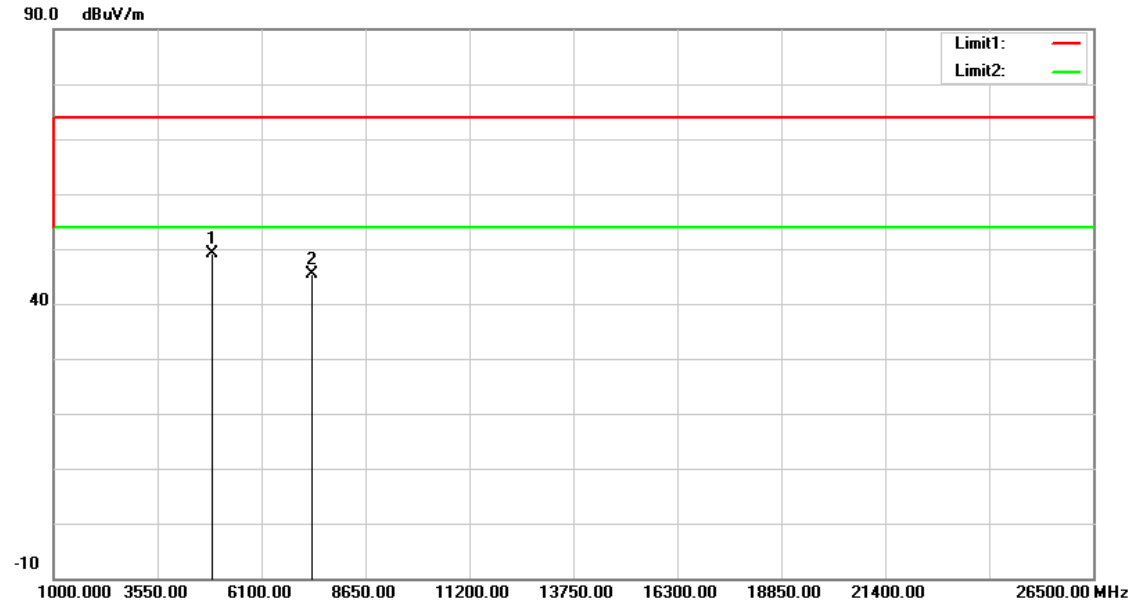


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	46.10	2.91	49.01	74.00	-24.99	peak
2	7356.000	36.76	8.68	45.44	74.00	-28.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

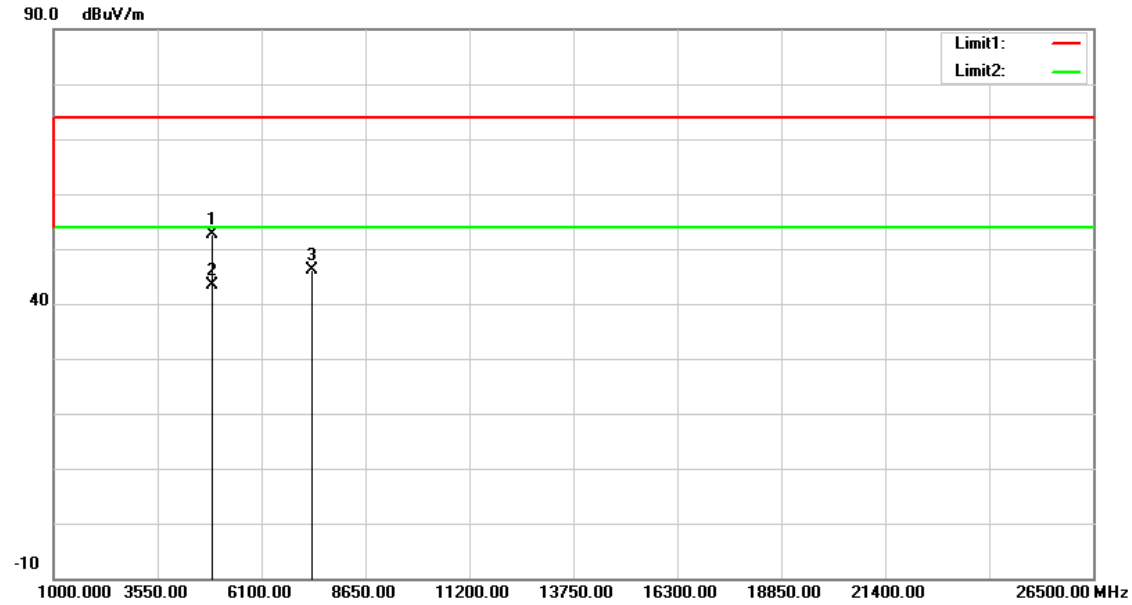


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	49.62	2.91	52.53	74.00	-21.47	peak
2	4904.000	40.45	2.91	43.36	54.00	-10.64	AVG
3	7356.000	37.44	8.68	46.12	74.00	-27.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		
Description:			

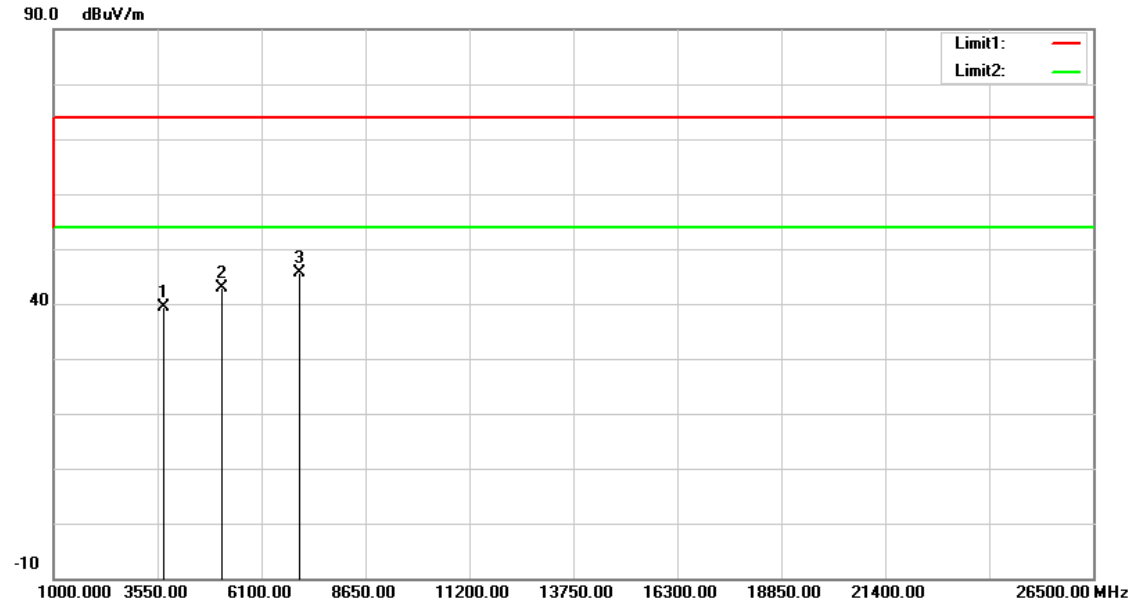


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3686.000	39.69	-0.23	39.46	74.00	-34.54	peak
2	5131.000	39.50	3.32	42.82	74.00	-31.18	peak
3	7035.000	38.04	7.68	45.72	74.00	-28.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Vertical		
Description:			

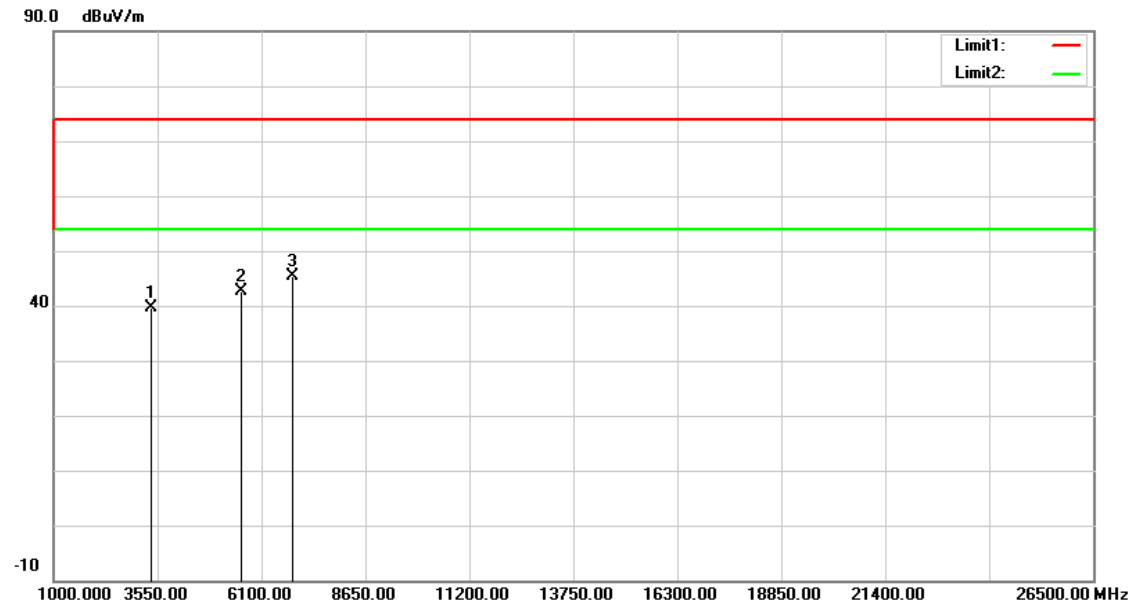

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3397.000	40.55	-0.83	39.72	74.00	-34.28	peak
2	5573.000	38.57	3.94	42.51	74.00	-31.49	peak
3	6865.000	38.15	7.21	45.36	74.00	-28.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

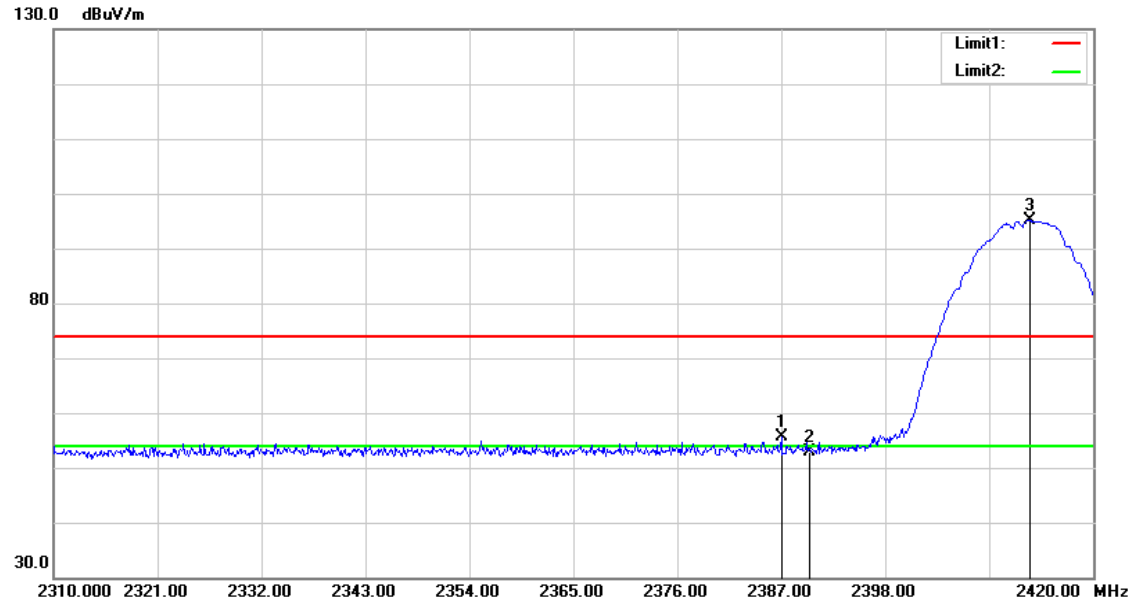


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.000	58.74	-3.20	55.54	74.00	-18.46	peak
2	2390.000	56.09	-3.19	52.90	74.00	-21.10	peak
3	2413.290	98.25	-3.10	95.15	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

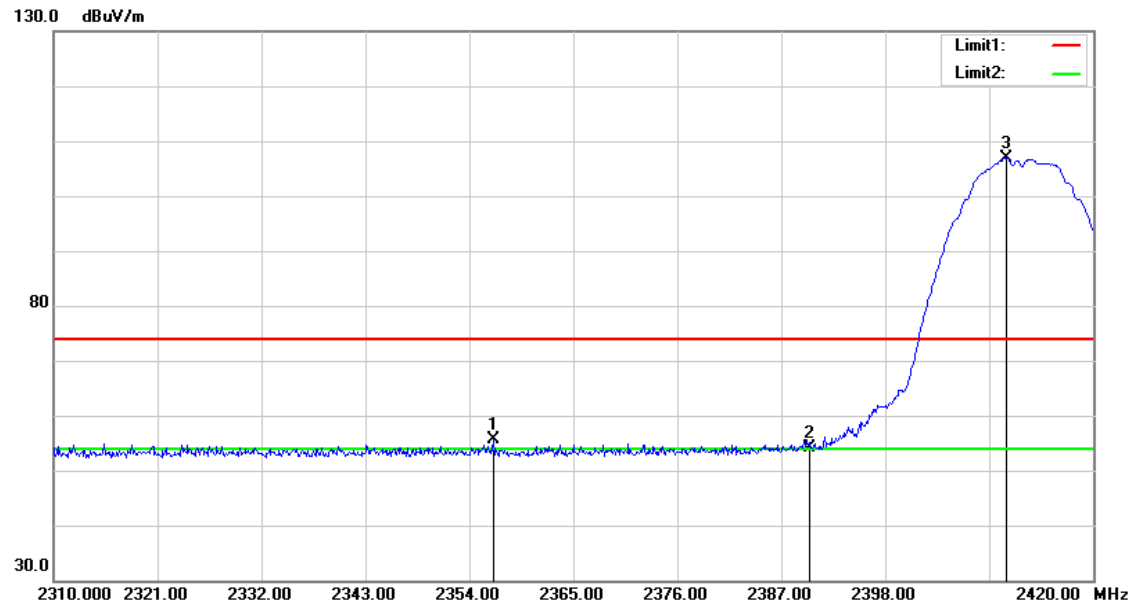


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2356.530	58.85	-3.30	55.55	74.00	-18.45	peak
2	2390.000	57.20	-3.19	54.01	74.00	-19.99	peak
3	2410.760	109.96	-3.12	106.84	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

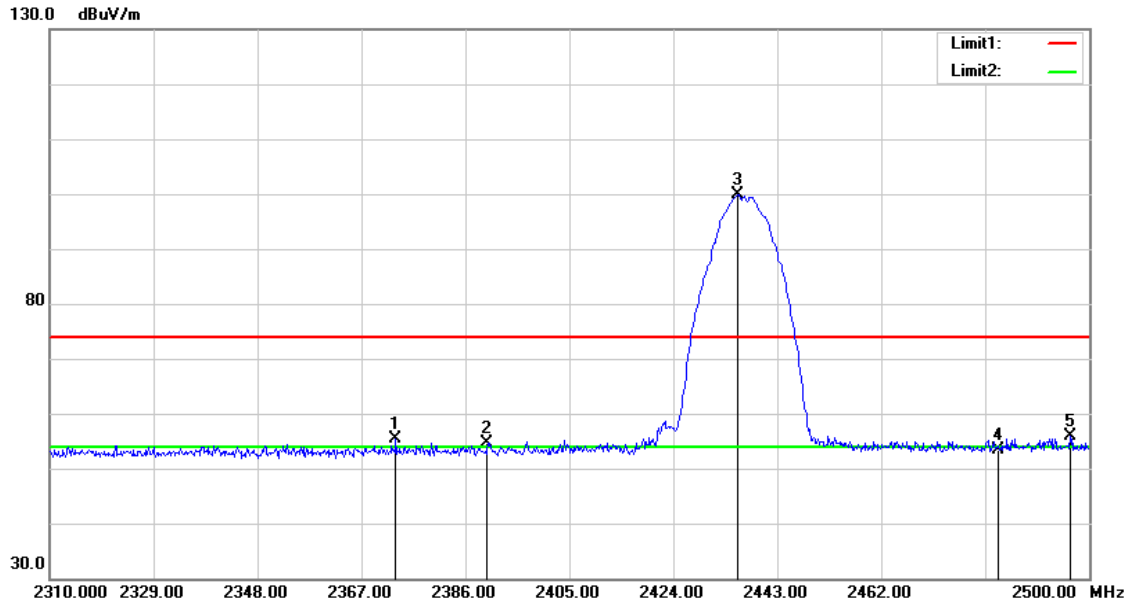


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.270	58.50	-3.24	55.26	74.00	-18.74	peak
2	2390.000	57.86	-3.19	54.67	74.00	-19.33	peak
3	2435.780	102.81	-3.03	99.78	--	--	peak
4	2483.500	56.34	-2.86	53.48	74.00	-20.52	peak
5	2496.580	58.57	-2.81	55.76	74.00	-18.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

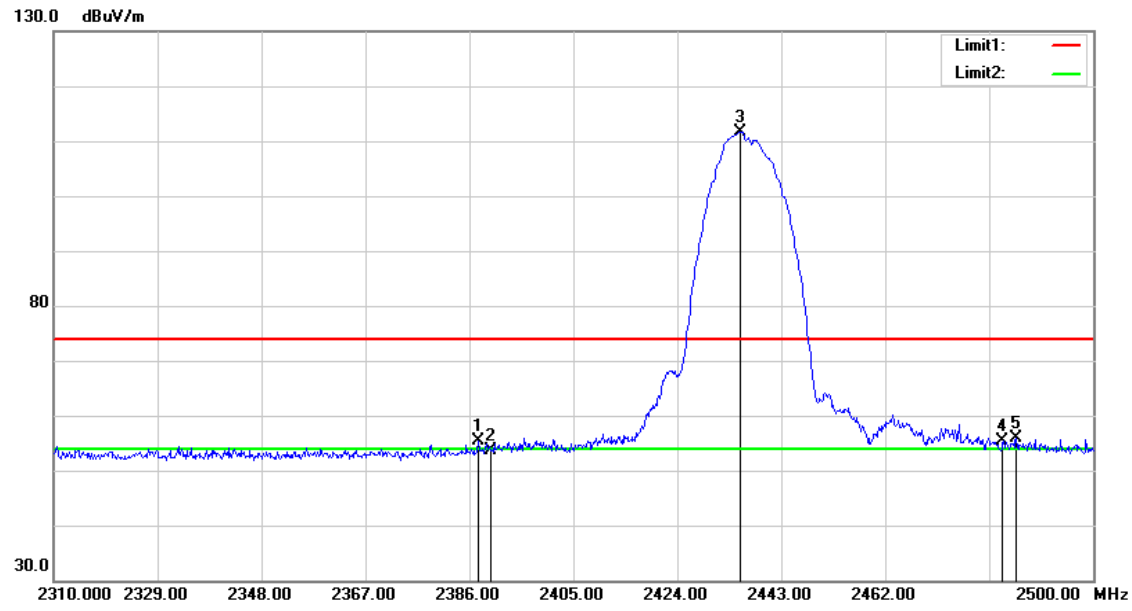


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	58.52	-3.19	55.33	74.00	-18.67	peak
2	2390.000	56.87	-3.19	53.68	74.00	-20.32	peak
3	2435.590	114.75	-3.03	111.72	--	--	peak
4	2483.500	58.24	-2.86	55.38	74.00	-18.62	peak
5	2485.940	58.65	-2.85	55.80	74.00	-18.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

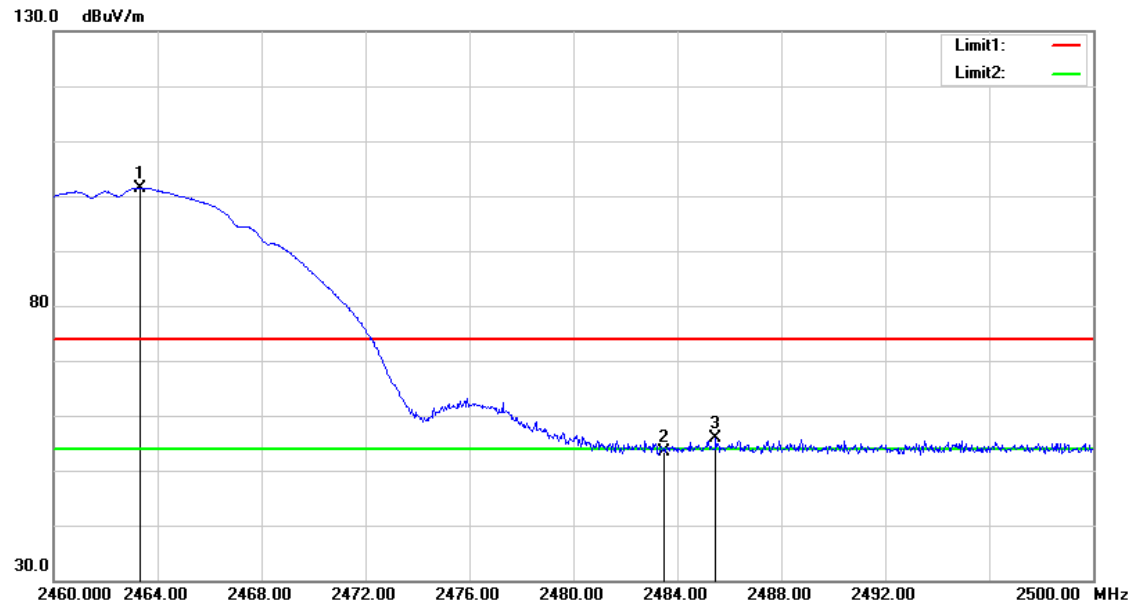


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.320	104.39	-2.93	101.46	--	--	peak
2	2483.500	56.30	-2.86	53.44	74.00	-20.56	peak
3	2485.480	58.79	-2.85	55.94	74.00	-18.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

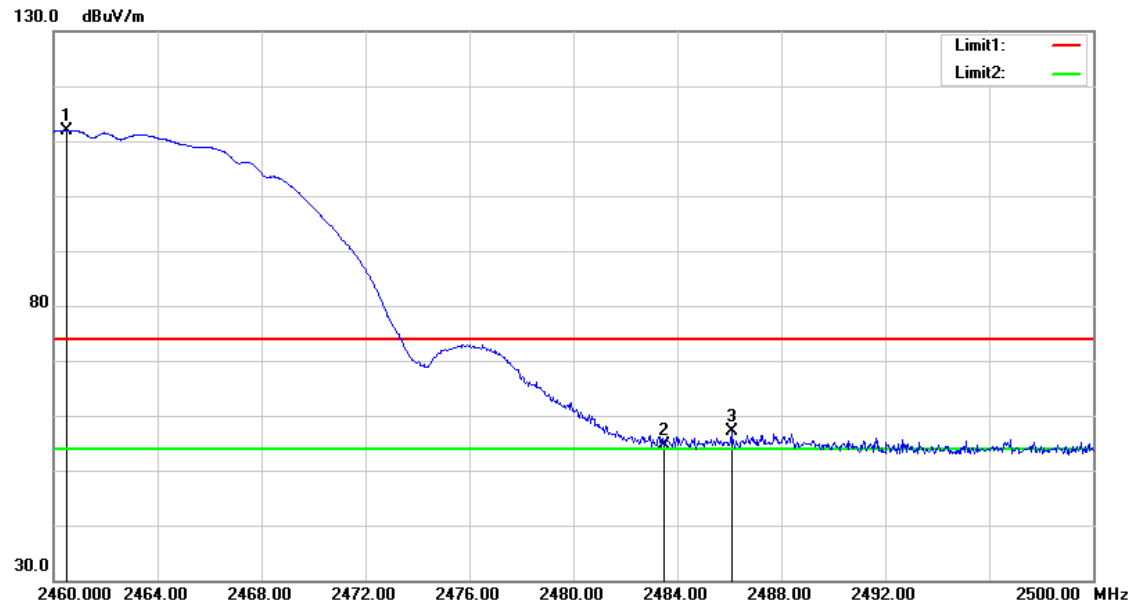


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.520	114.87	-2.94	111.93	--	--	peak
2	2483.500	57.60	-2.86	54.74	74.00	-19.26	peak
3	2486.080	60.06	-2.85	57.21	74.00	-16.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

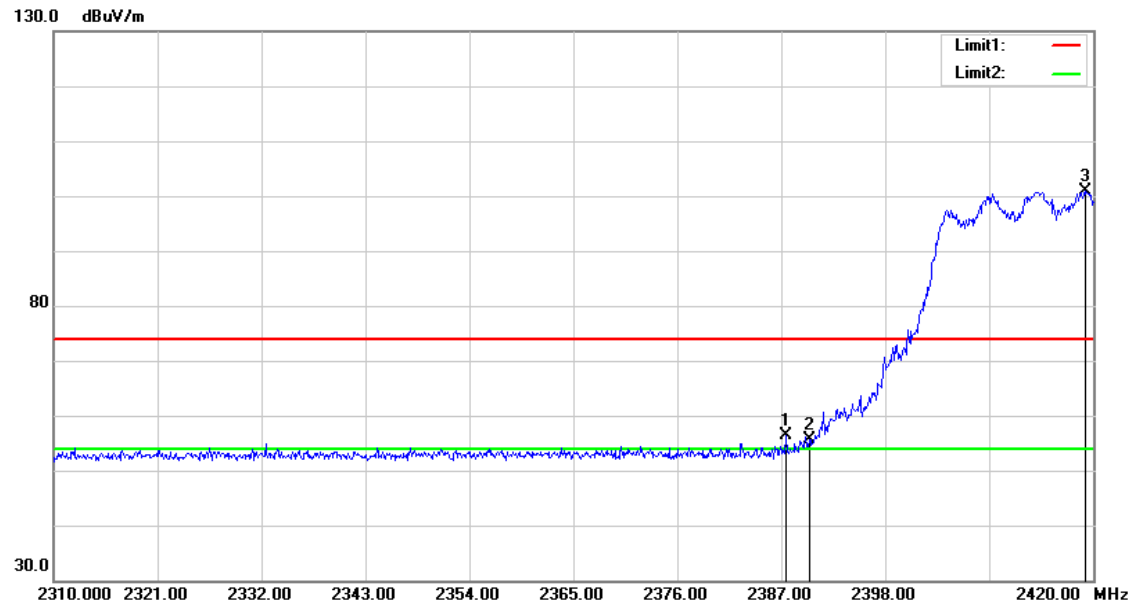


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.550	59.49	-3.19	56.30	74.00	-17.70	peak
2	2390.000	58.84	-3.19	55.65	74.00	-18.35	peak
3	2419.120	103.96	-3.09	100.87	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

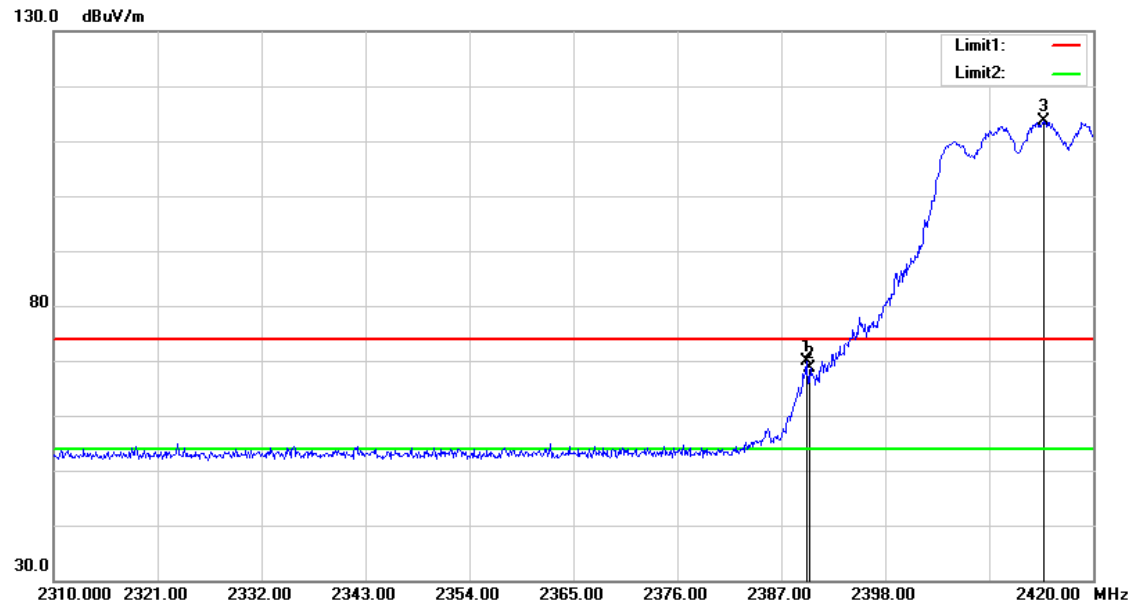


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.640	73.06	-3.19	69.87	74.00	-4.13	peak
2	2390.000	71.76	-3.19	68.57	74.00	-5.43	peak
3	2414.720	116.74	-3.10	113.64	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

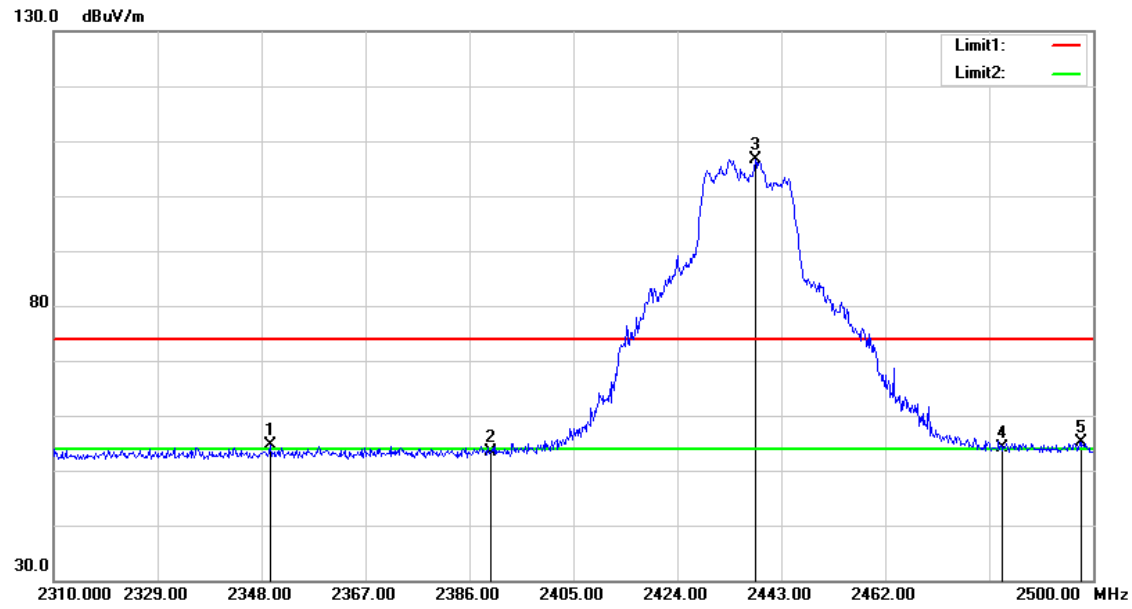


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.520	57.90	-3.32	54.58	74.00	-19.42	peak
2	2390.000	56.69	-3.19	53.50	74.00	-20.50	peak
3	2438.250	109.62	-3.02	106.60	--	--	peak
4	2483.500	57.05	-2.86	54.19	74.00	-19.81	peak
5	2497.720	57.98	-2.81	55.17	74.00	-18.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

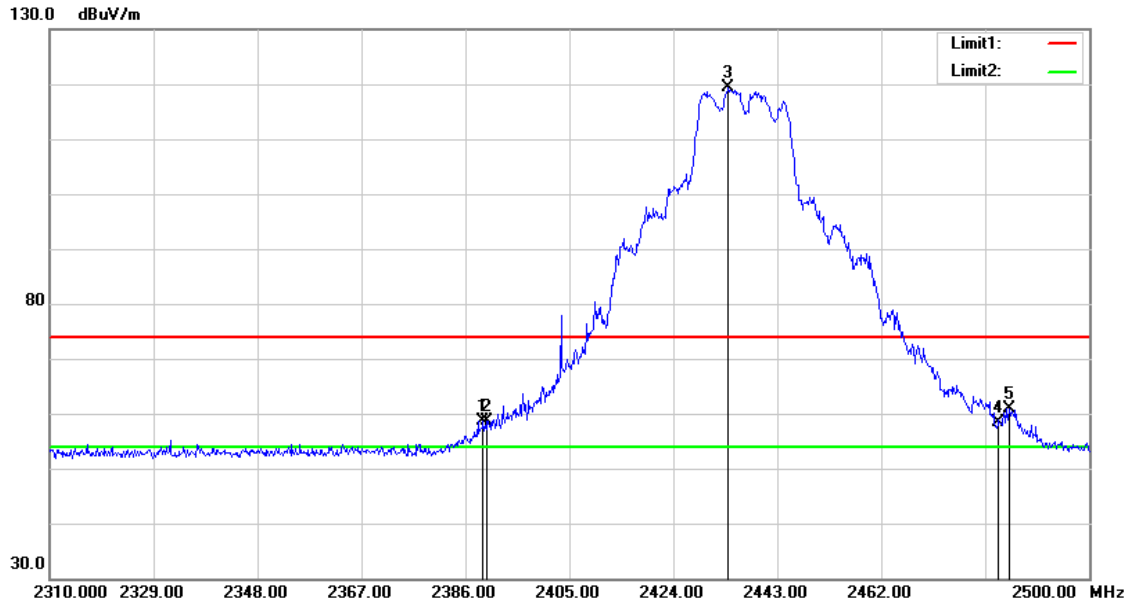


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	61.92	-3.19	58.73	74.00	-15.27	peak
2	2390.000	61.93	-3.19	58.74	74.00	-15.26	peak
3	2434.070	122.31	-3.03	119.28	--	--	peak
4	2483.500	61.19	-2.86	58.33	74.00	-15.67	peak
5	2485.370	63.78	-2.85	60.93	74.00	-13.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

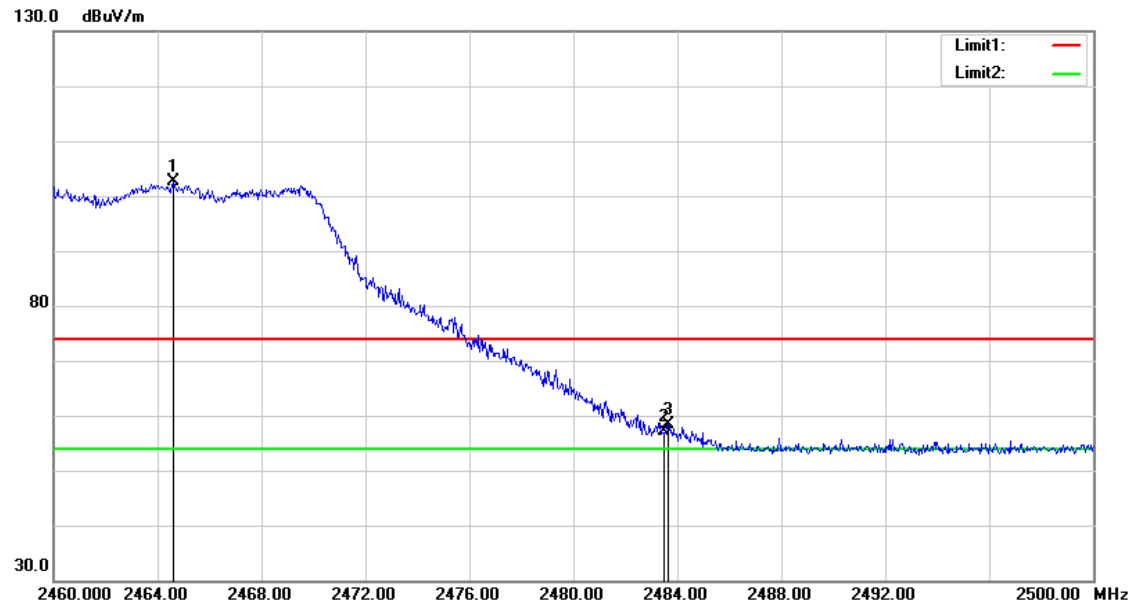


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.600	105.49	-2.93	102.56	--	--	peak
2	2483.500	59.90	-2.86	57.04	74.00	-16.96	peak
3	2483.640	61.32	-2.86	58.46	74.00	-15.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

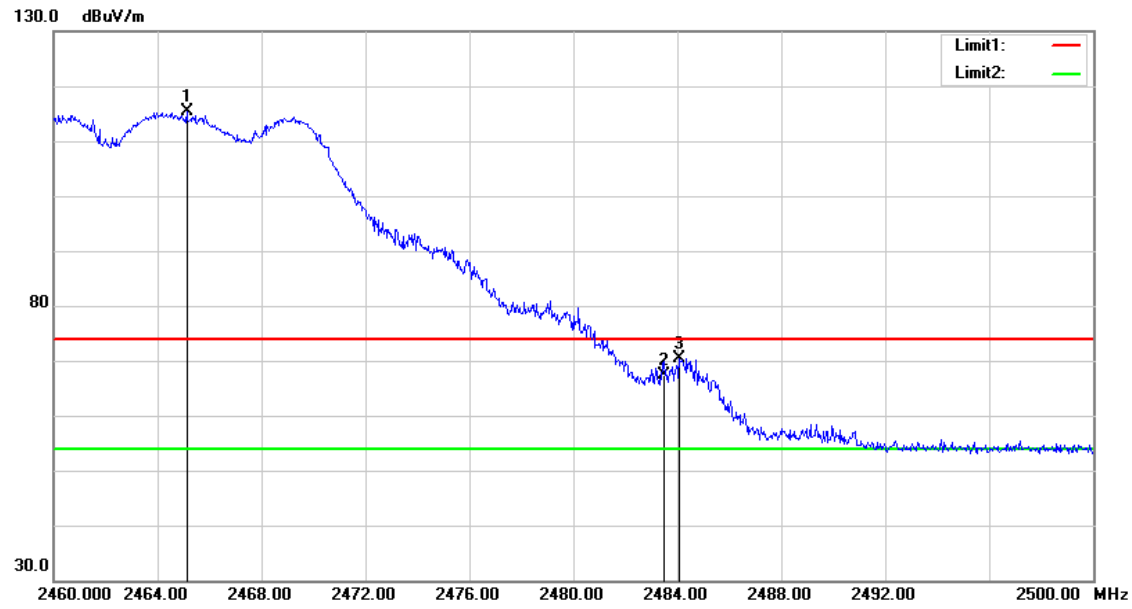


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.120	118.34	-2.93	115.41	--	--	peak
2	2483.500	70.18	-2.86	67.32	74.00	-6.68	peak
3	2484.080	73.34	-2.85	70.49	74.00	-3.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

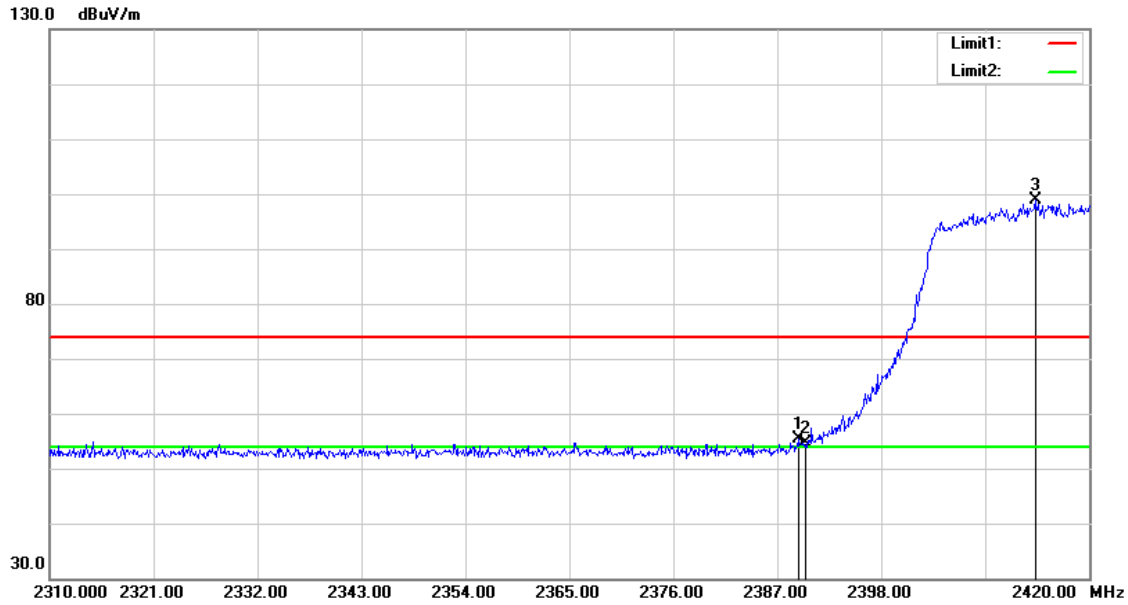


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	58.46	-3.19	55.27	74.00	-18.73	peak
2	2390.000	57.87	-3.19	54.68	74.00	-19.32	peak
3	2414.280	101.88	-3.10	98.78	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

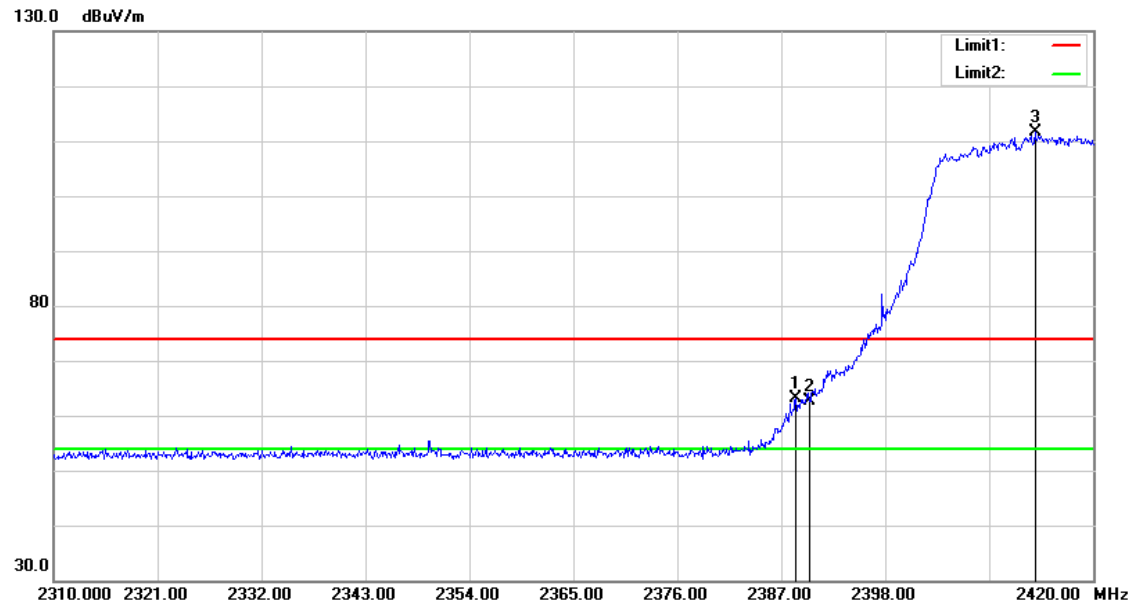


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	66.25	-3.19	63.06	74.00	-10.94	peak
2	2390.000	65.91	-3.19	62.72	74.00	-11.28	peak
3	2413.840	114.62	-3.10	111.52	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

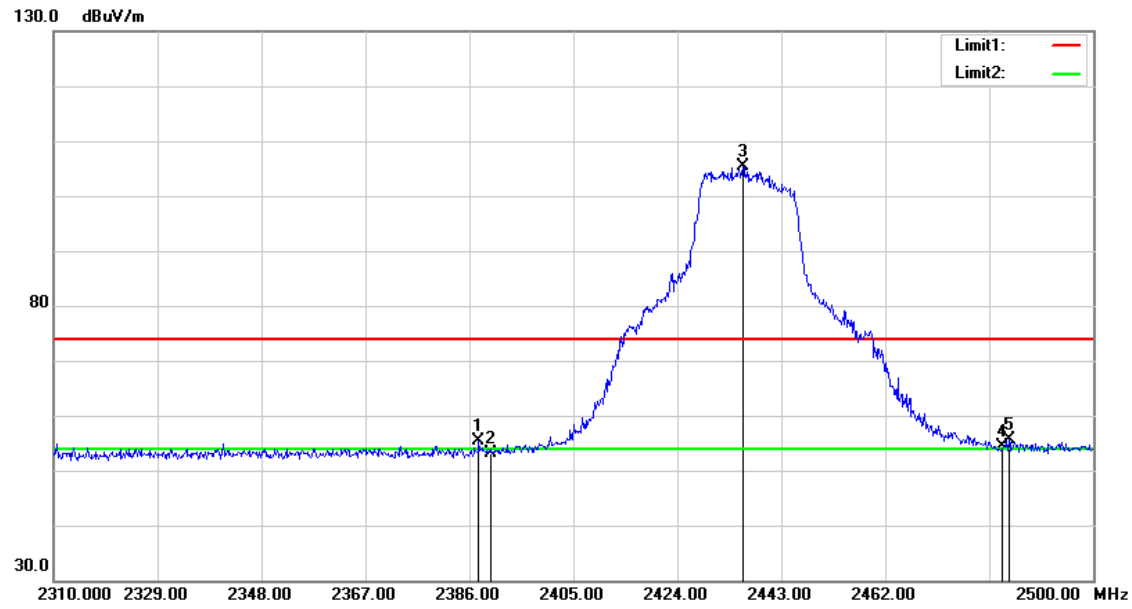


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	58.58	-3.19	55.39	74.00	-18.61	peak
2	2390.000	56.37	-3.19	53.18	74.00	-20.82	peak
~~3~~	2435.970	108.34	-3.03	105.31	--	--	~~peak~~
4	2483.500	57.24	-2.86	54.38	74.00	-19.62	peak
5	2484.610	58.60	-2.85	55.75	74.00	-18.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

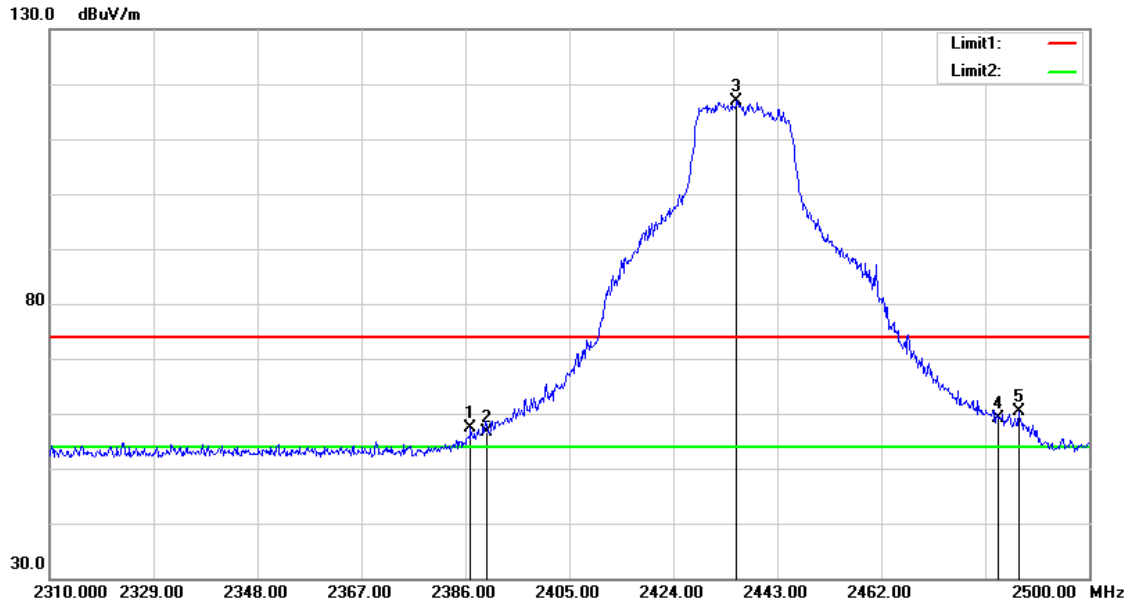


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.950	60.50	-3.20	57.30	74.00	-16.70	peak
2	2390.000	59.82	-3.19	56.63	74.00	-17.37	peak
3	2435.590	119.85	-3.03	116.82	--	--	peak
4	2483.500	62.10	-2.86	59.24	74.00	-14.76	peak
5	2487.080	63.12	-2.85	60.27	74.00	-13.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

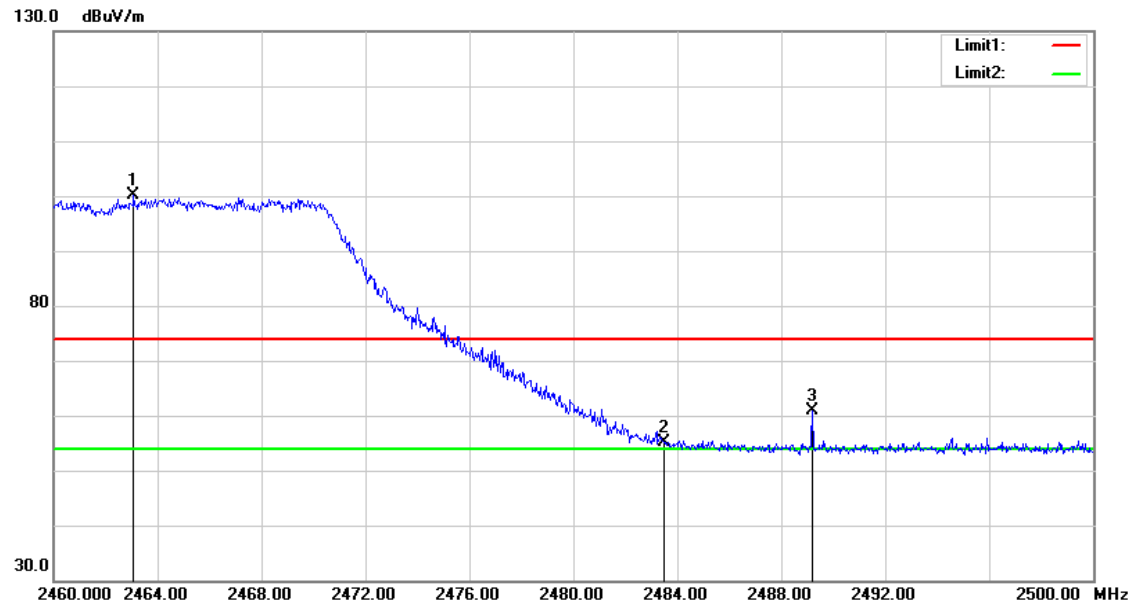


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.080	103.01	-2.93	100.08	--	--	peak
2	2483.500	57.94	-2.86	55.08	74.00	-18.92	peak
3	2489.200	63.67	-2.84	60.83	74.00	-13.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

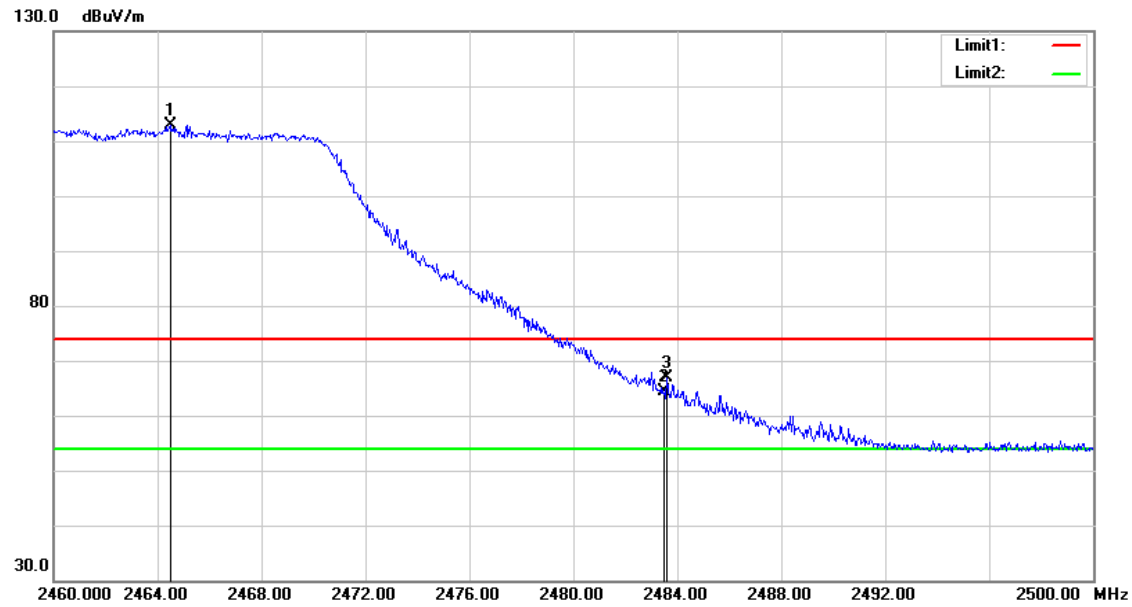


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.520	115.86	-2.93	112.93	--	--	peak
2	2483.500	67.31	-2.86	64.45	74.00	-9.55	peak
3	2483.600	69.64	-2.86	66.78	74.00	-7.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

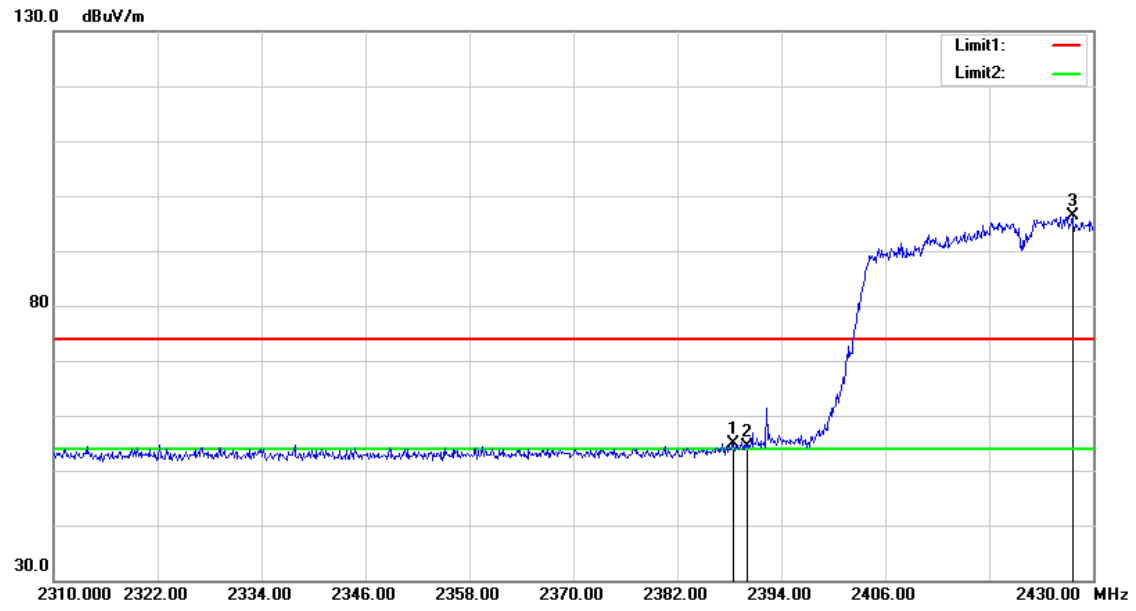


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.480	58.03	-3.19	54.84	74.00	-19.16	peak
2	2390.000	57.47	-3.19	54.28	74.00	-19.72	peak
3	2427.600	99.31	-3.05	96.26	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

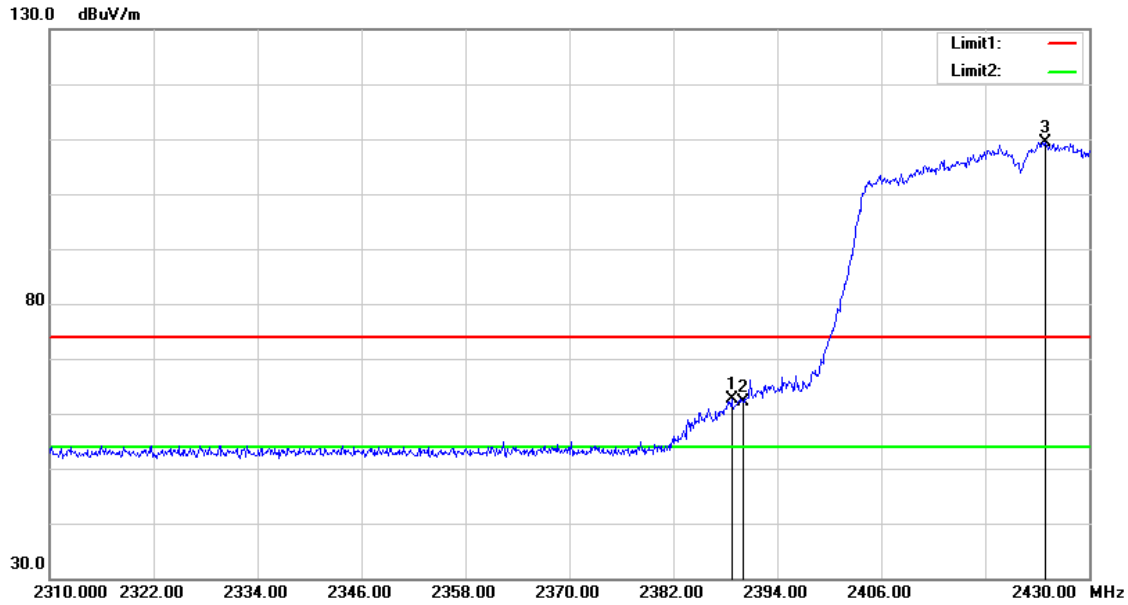


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.720	65.82	-3.19	62.63	74.00	-11.37	peak
2	2390.000	65.26	-3.19	62.07	74.00	-11.93	peak
3	2424.960	112.49	-3.07	109.42	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

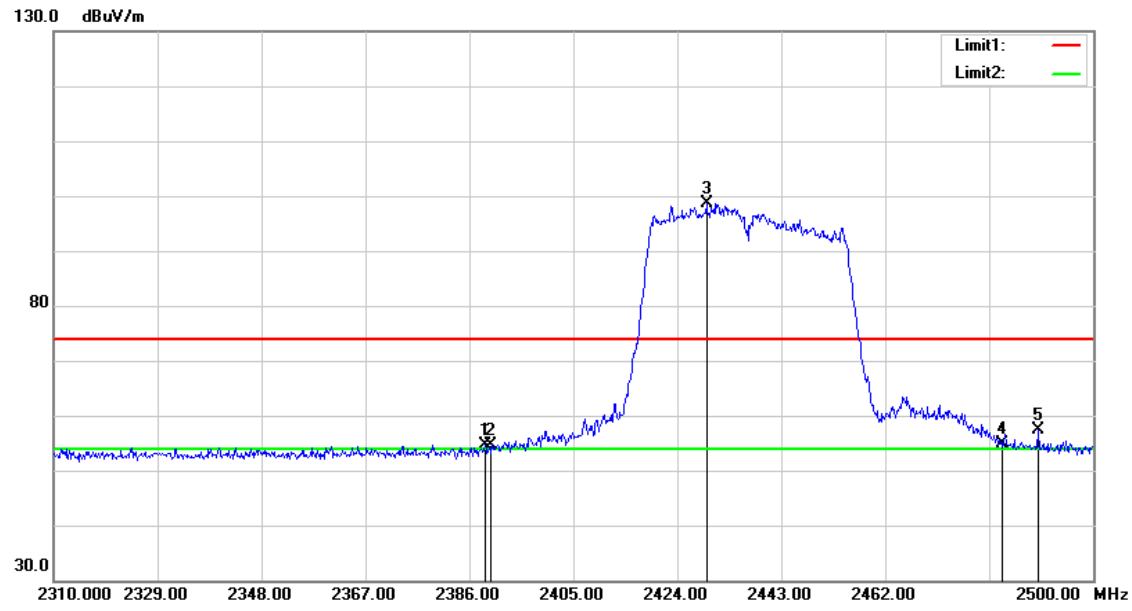


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	57.82	-3.19	54.63	74.00	-19.37	peak
2	2390.000	57.92	-3.19	54.73	74.00	-19.27	peak
3	2429.320	101.79	-3.05	98.74	--	--	peak
4	2483.500	57.65	-2.86	54.79	74.00	-19.21	peak
5	2489.930	60.17	-2.84	57.33	74.00	-16.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

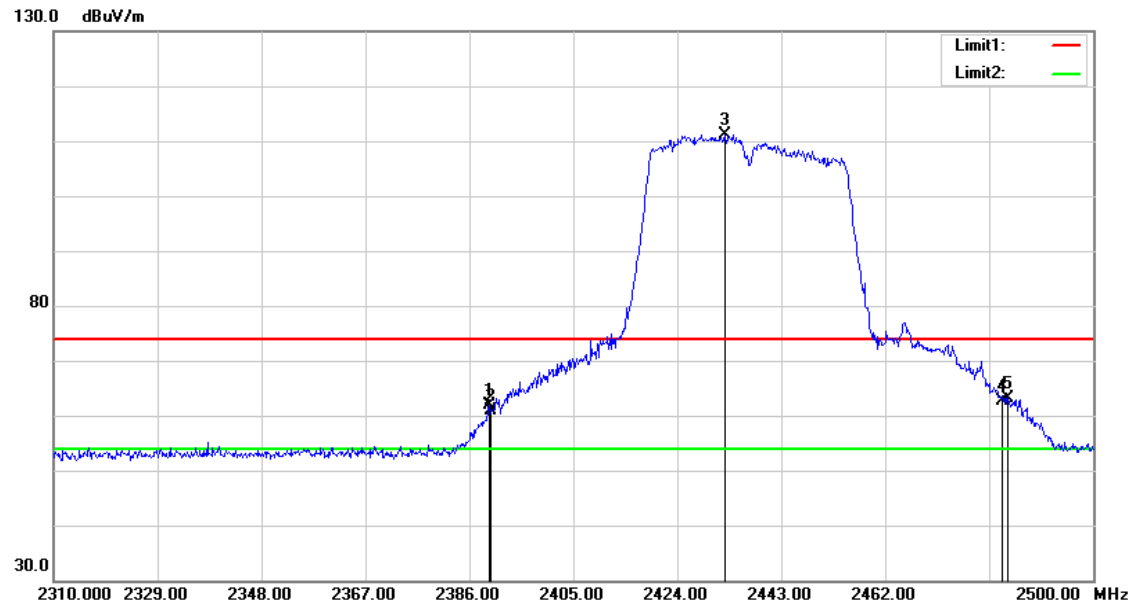


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.610	65.18	-3.19	61.99	74.00	-12.01	peak
2	2390.000	64.10	-3.19	60.91	74.00	-13.09	peak
3	2432.740	114.13	-3.04	111.09	--	--	peak
4	2483.500	65.49	-2.86	62.63	74.00	-11.37	peak
5	2484.420	65.89	-2.85	63.04	74.00	-10.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

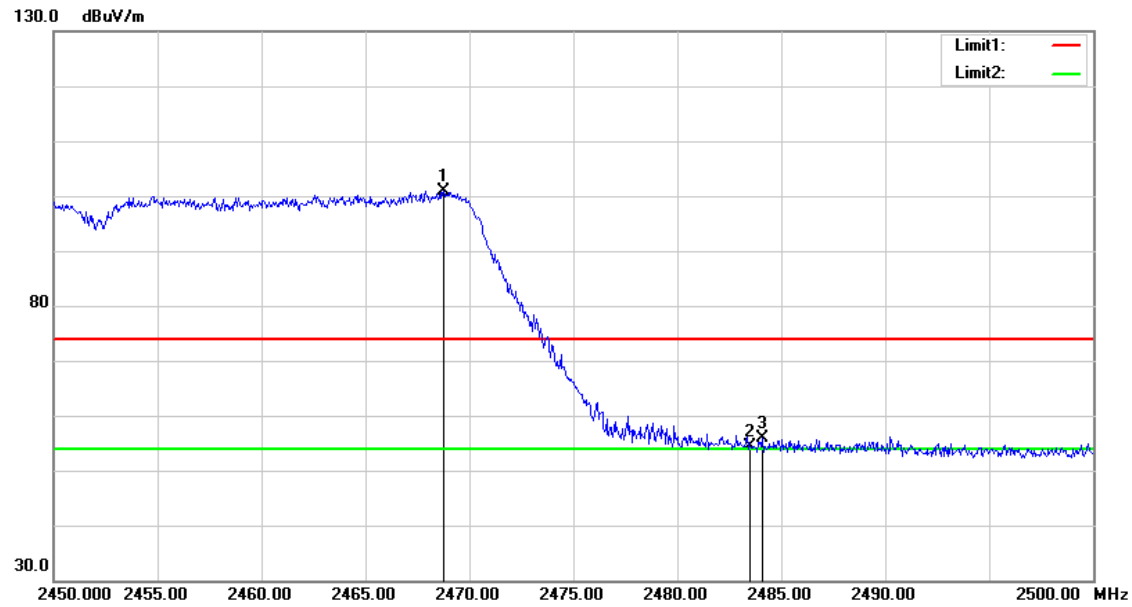


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.750	103.85	-2.91	100.94	--	--	peak
2	2483.500	57.26	-2.86	54.40	74.00	-19.60	peak
3	2484.100	58.79	-2.85	55.94	74.00	-18.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

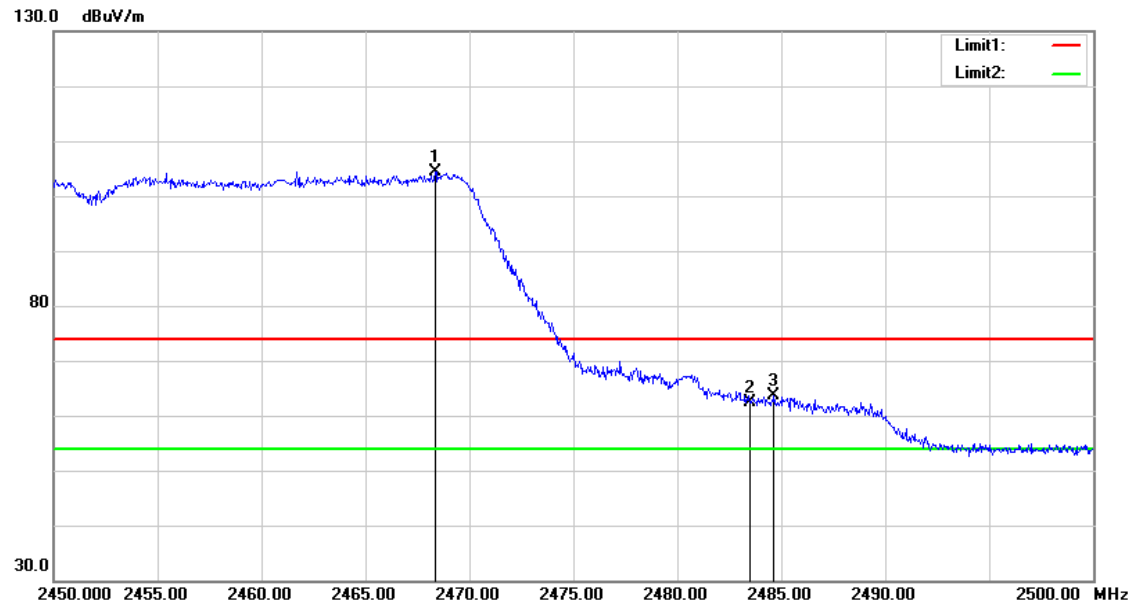

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.350	107.39	-2.91	104.48	--	--	peak
2	2483.500	65.14	-2.86	62.28	74.00	-11.72	peak
3	2484.650	66.56	-2.85	63.71	74.00	-10.29	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

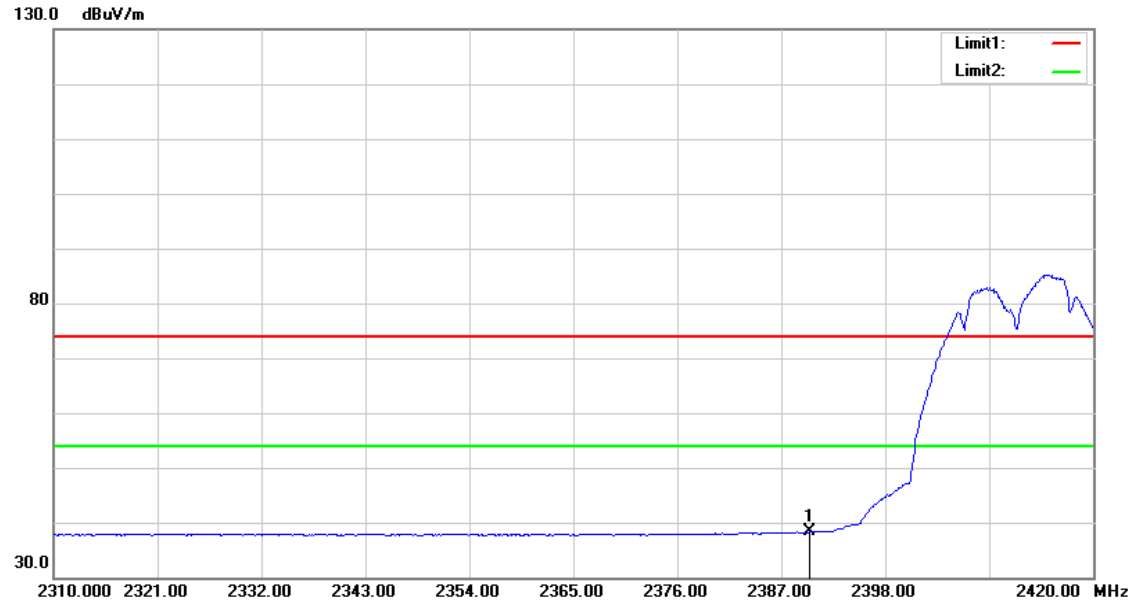


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	41.52	-3.19	38.33	54.00	-15.67	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

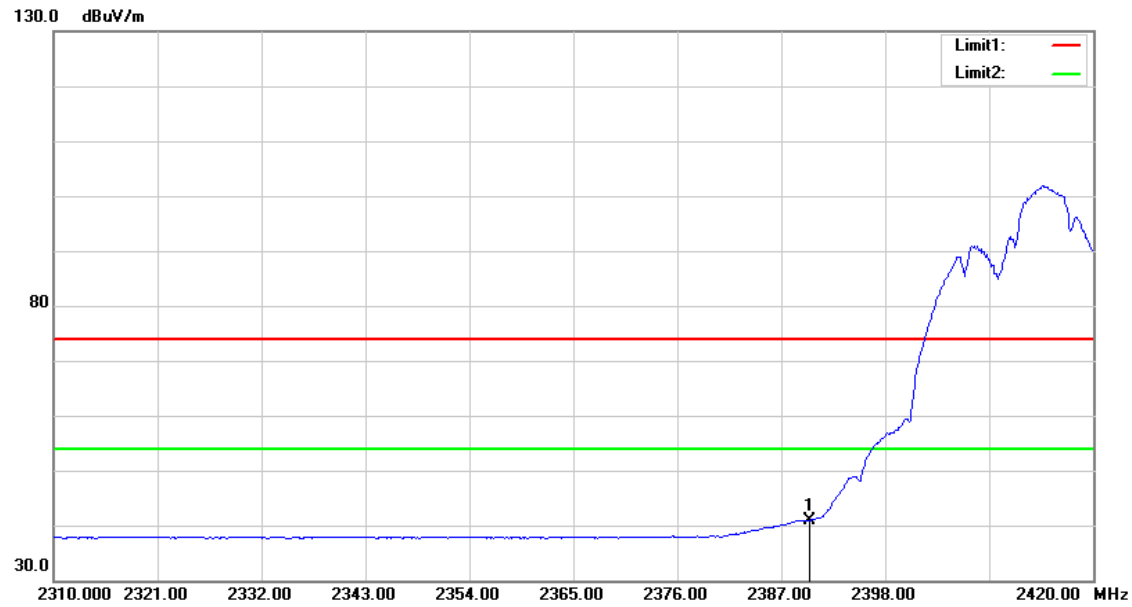


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	44.14	-3.19	40.95	54.00	-13.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

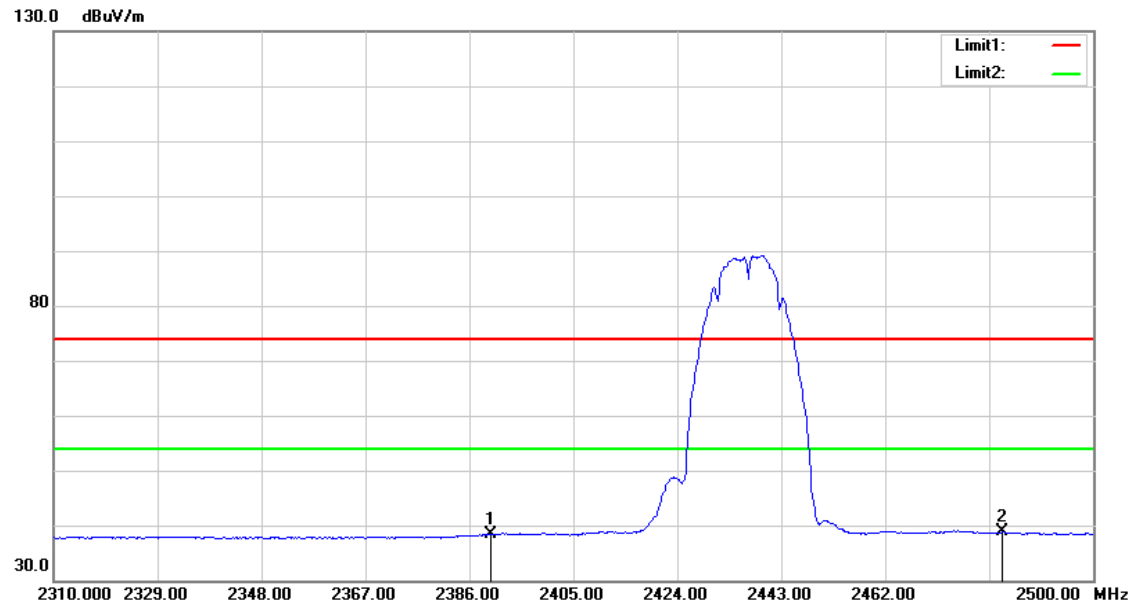


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	41.57	-3.19	38.38	54.00	-15.62	AVG
2	2483.500	41.63	-2.86	38.77	54.00	-15.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

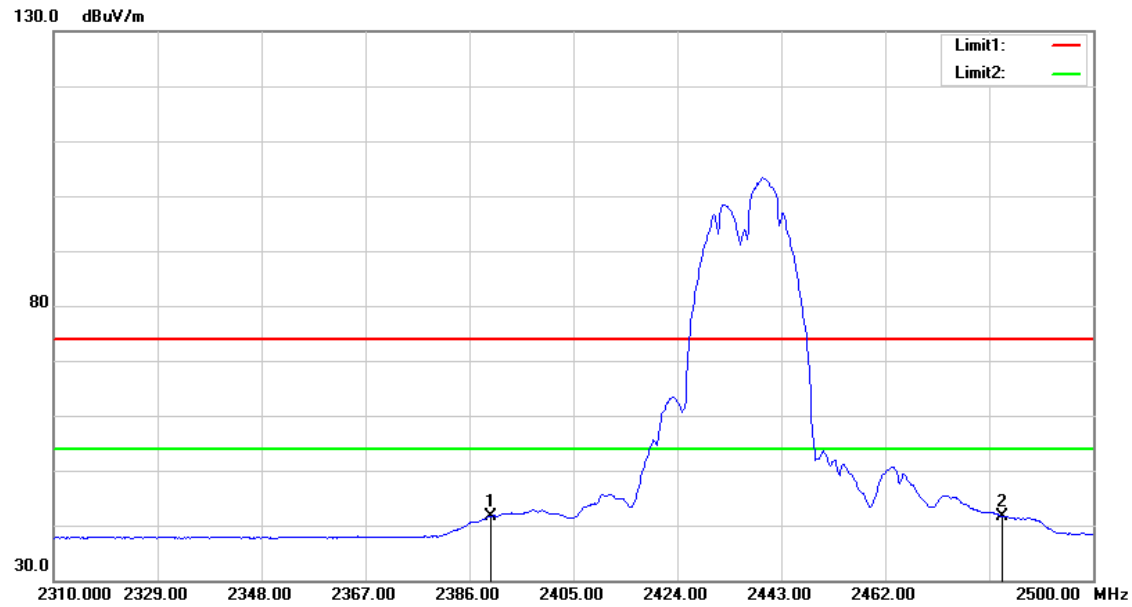


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	44.85	-3.19	41.66	54.00	-12.34	AVG
2	2483.500	44.52	-2.86	41.66	54.00	-12.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

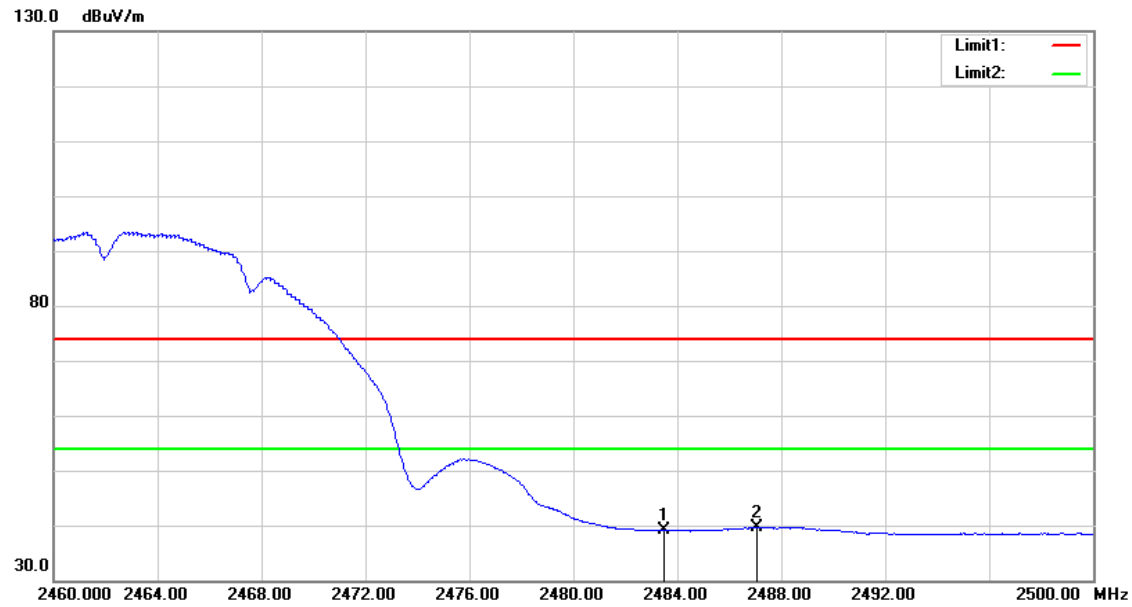


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	42.03	-2.86	39.17	54.00	-14.83	AVG
2	2487.040	42.49	-2.85	39.64	54.00	-14.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

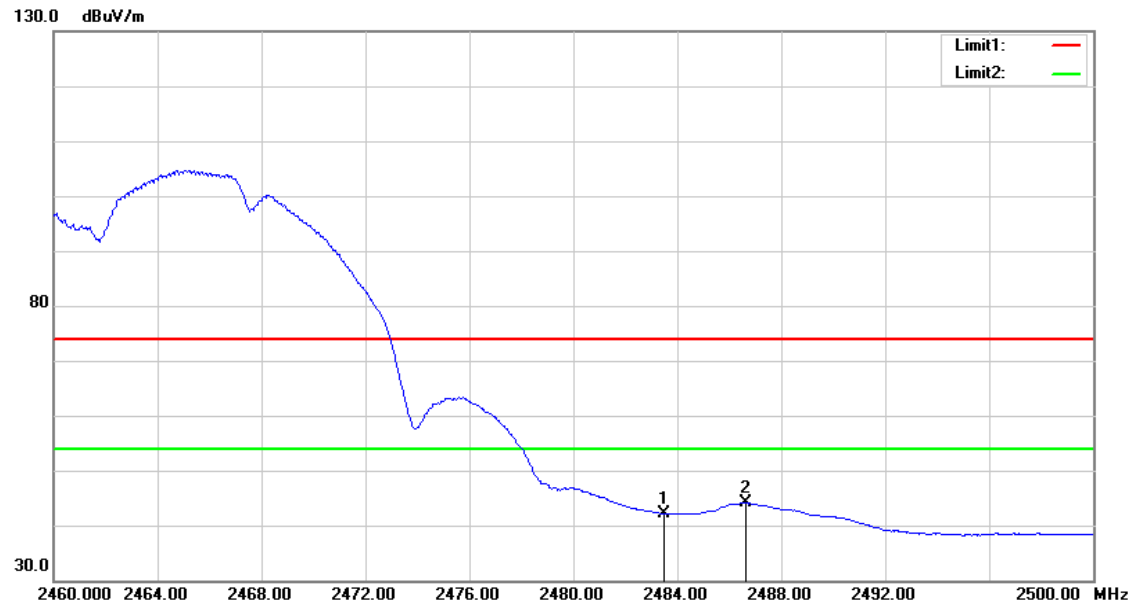


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.01	-2.86	42.15	54.00	-11.85	AVG
2	2486.640	46.91	-2.85	44.06	54.00	-9.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

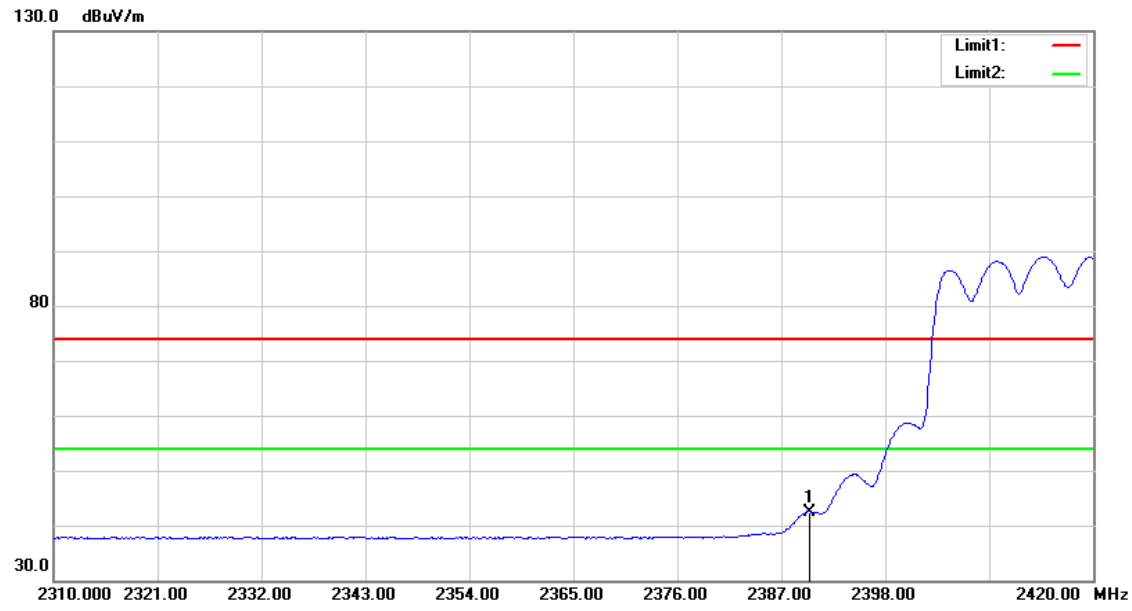


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	45.67	-3.19	42.48	54.00	-11.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

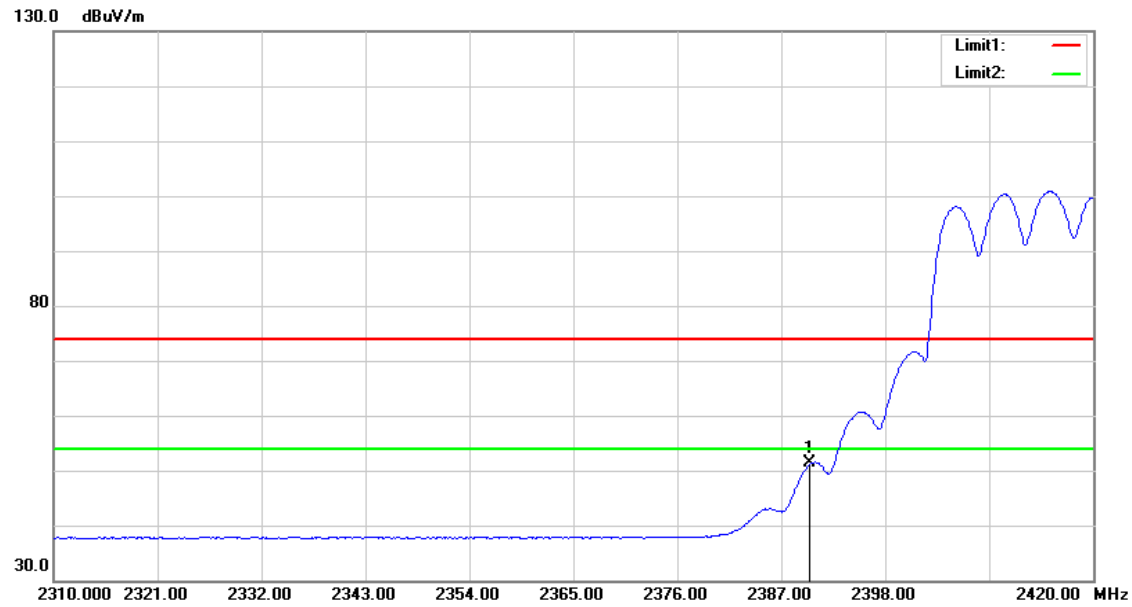


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	54.47	-3.19	51.28	54.00	-2.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

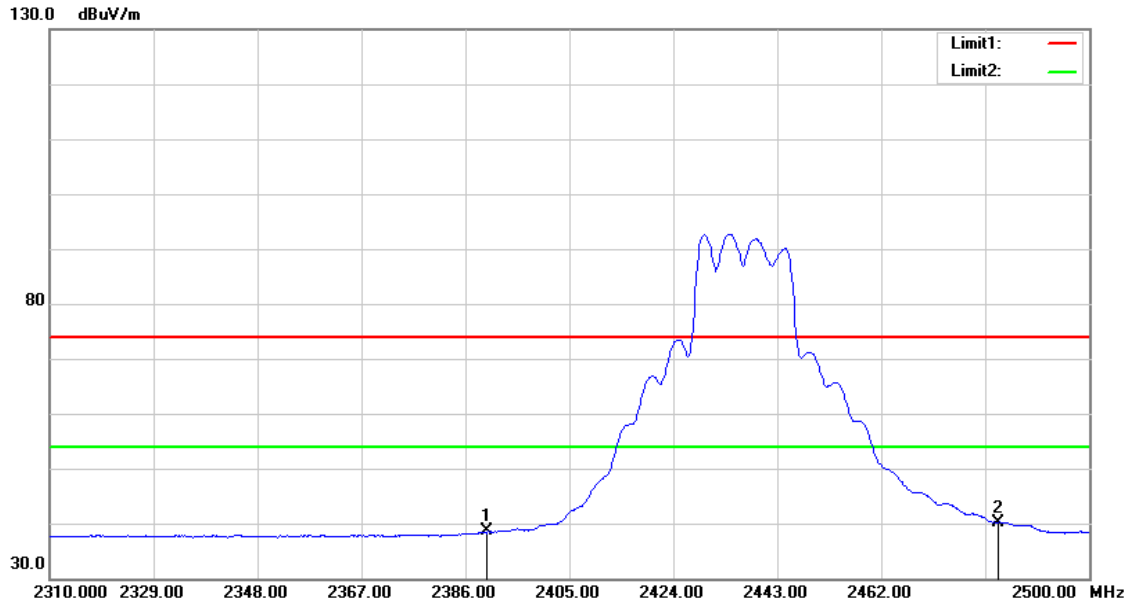


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	41.71	-3.19	38.52	54.00	-15.48	AVG
2	2483.500	43.11	-2.86	40.25	54.00	-13.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

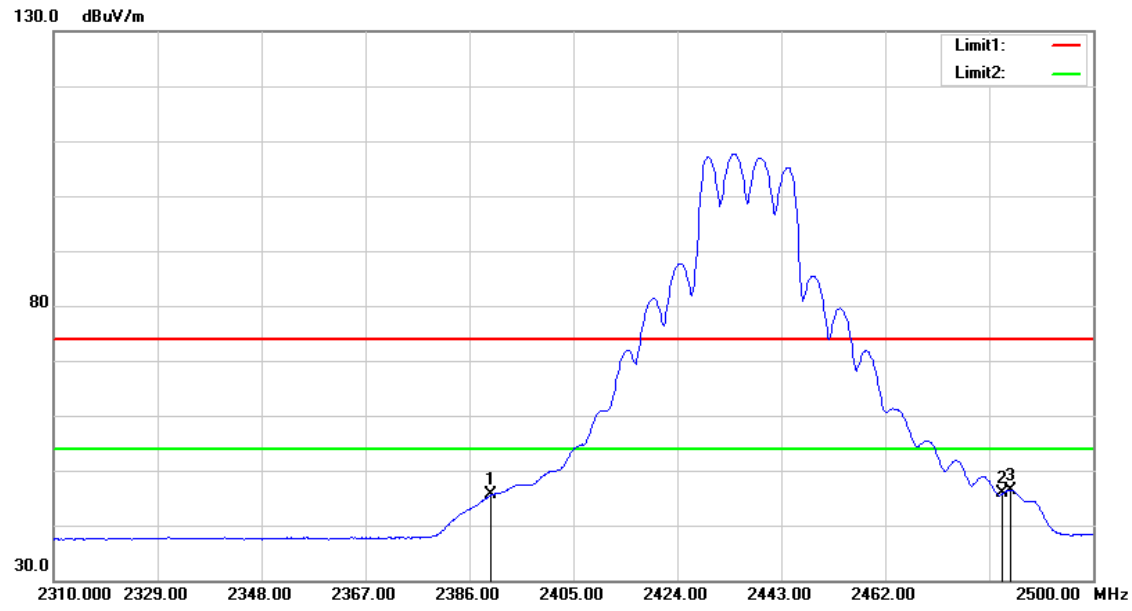


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	48.80	-3.19	45.61	54.00	-8.39	AVG
2	2483.500	48.85	-2.86	45.99	54.00	-8.01	AVG
3	2484.800	49.28	-2.85	46.43	54.00	-7.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

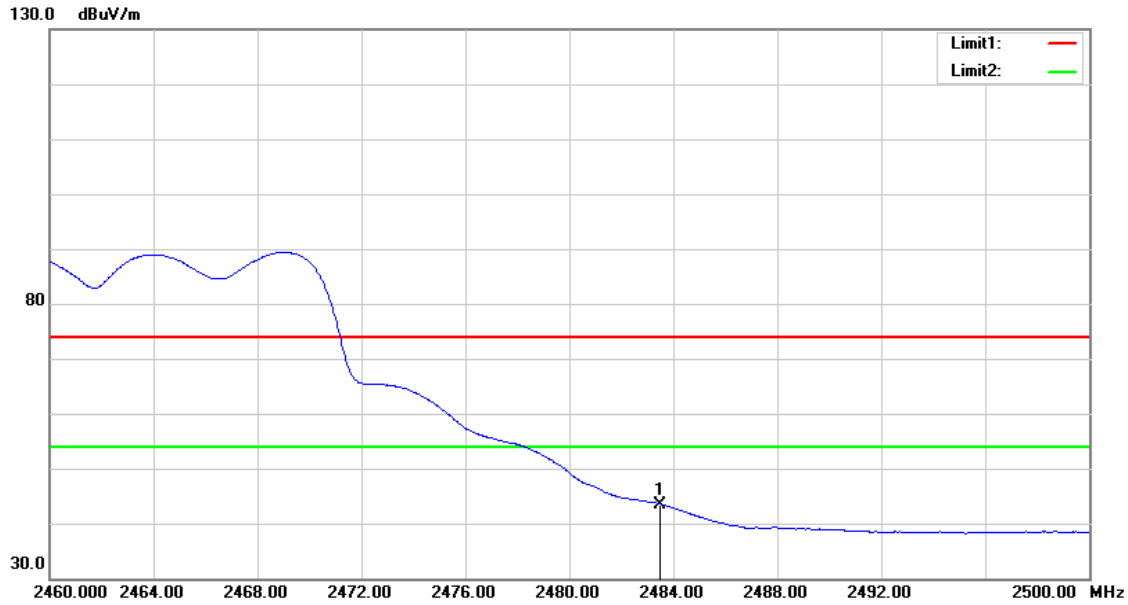


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.32	-2.86	43.46	54.00	-10.54	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

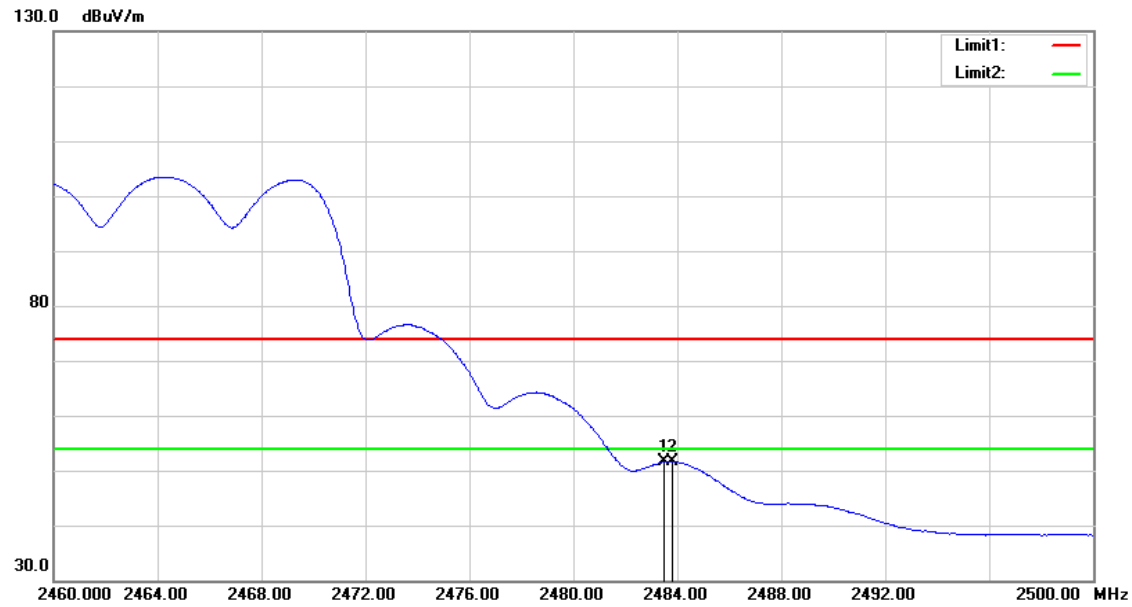


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.40	-2.86	51.54	54.00	-2.46	AVG
2	2483.800	54.51	-2.86	51.65	54.00	-2.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

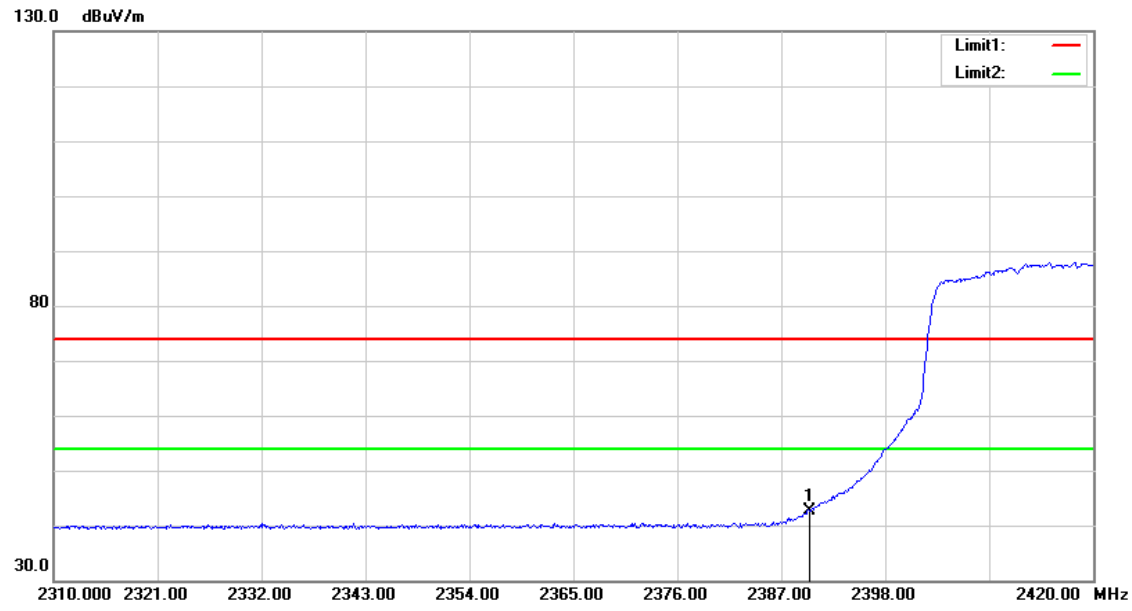


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	45.84	-3.19	42.65	54.00	-11.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

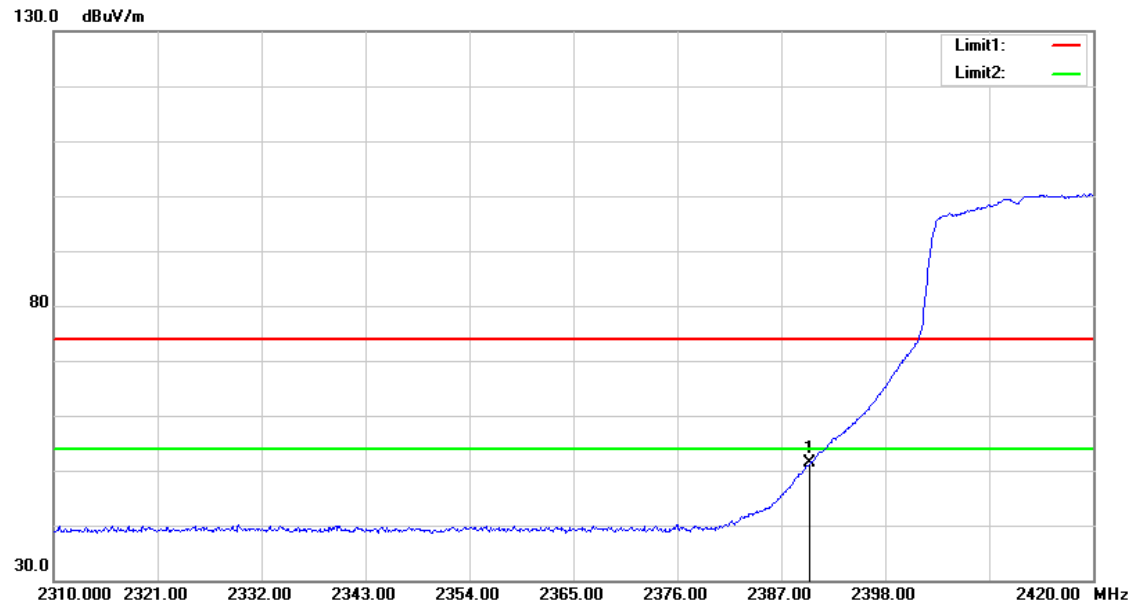


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	54.60	-3.19	51.41	54.00	-2.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

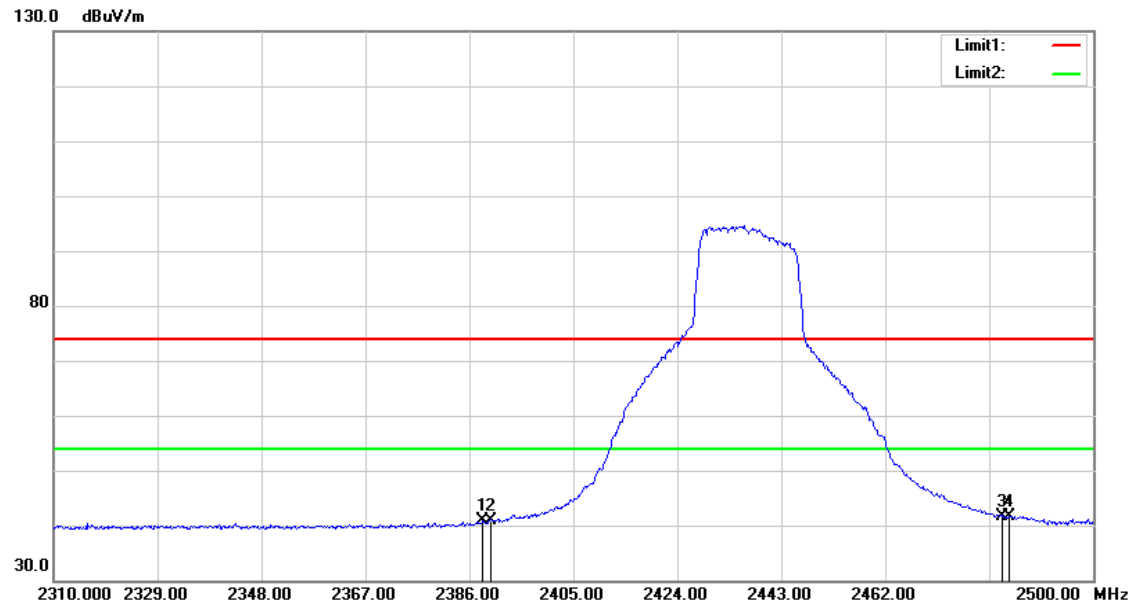


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	44.14	-3.19	40.95	54.00	-13.05	AVG
2	2390.000	44.11	-3.19	40.92	54.00	-13.08	AVG
3	2483.500	44.41	-2.86	41.55	54.00	-12.45	AVG
4	2484.610	44.49	-2.85	41.64	54.00	-12.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

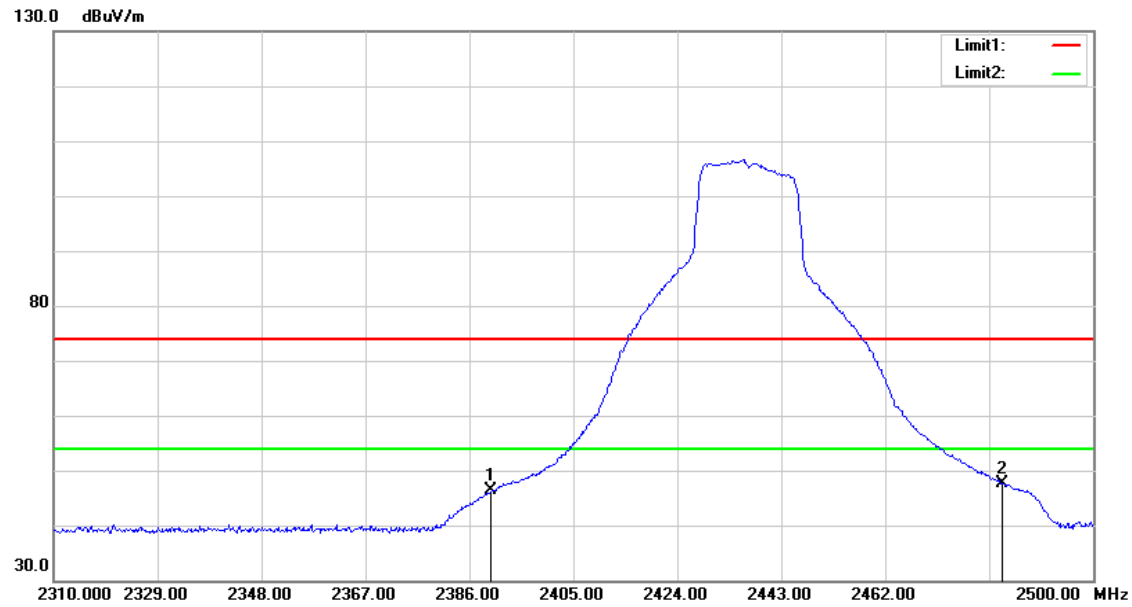


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	49.51	-3.19	46.32	54.00	-7.68	AVG
2	2483.500	50.56	-2.86	47.70	54.00	-6.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

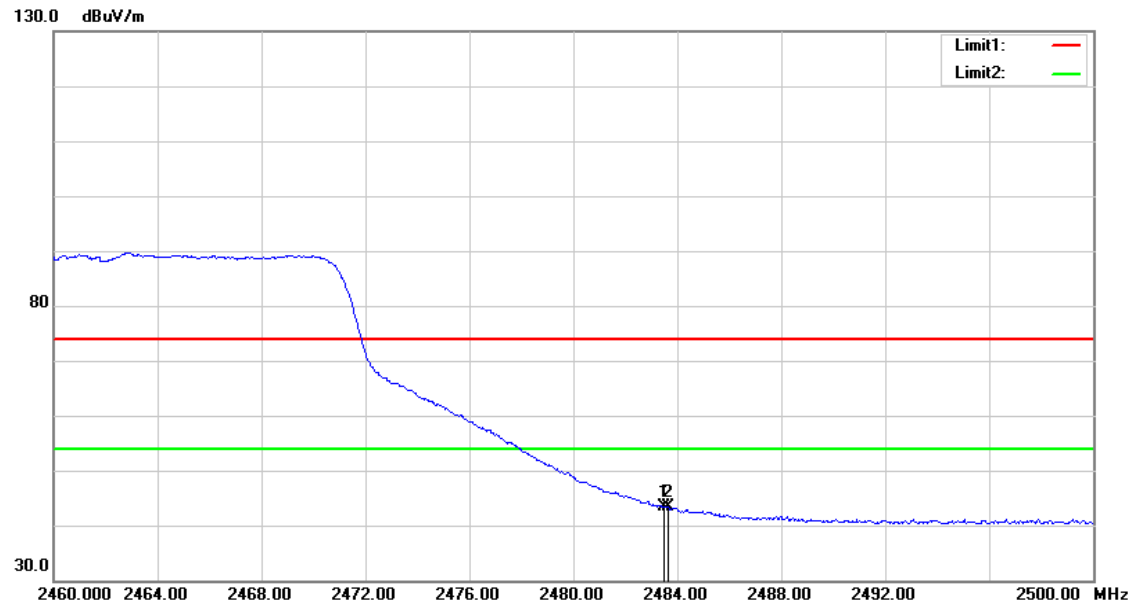


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.25	-2.86	43.39	54.00	-10.61	AVG
2	2483.640	46.28	-2.86	43.42	54.00	-10.58	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

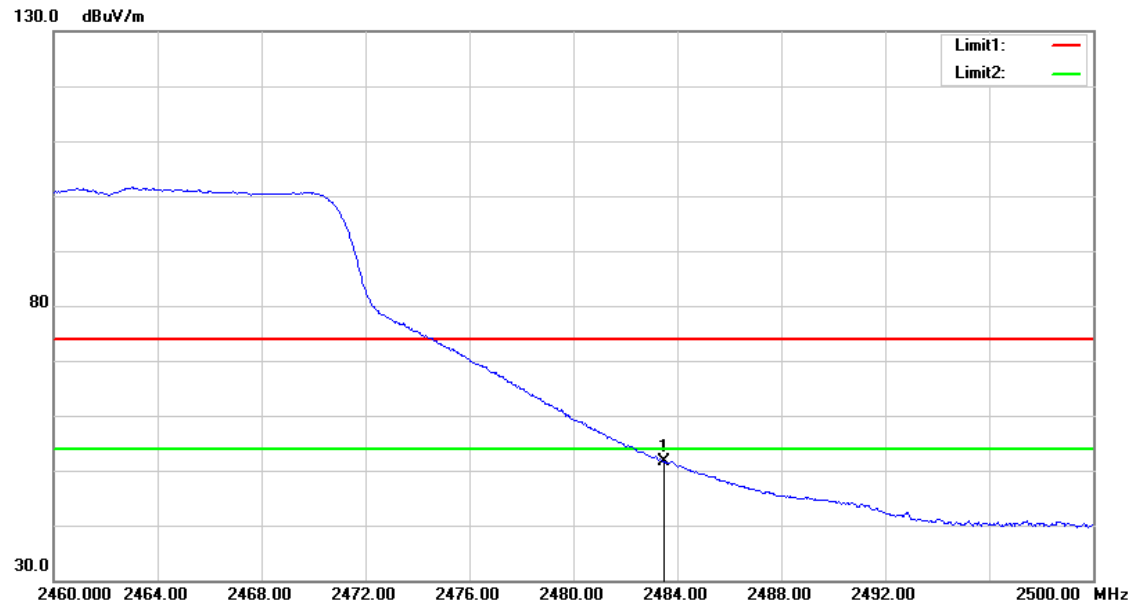


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.40	-2.86	51.54	54.00	-2.46	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

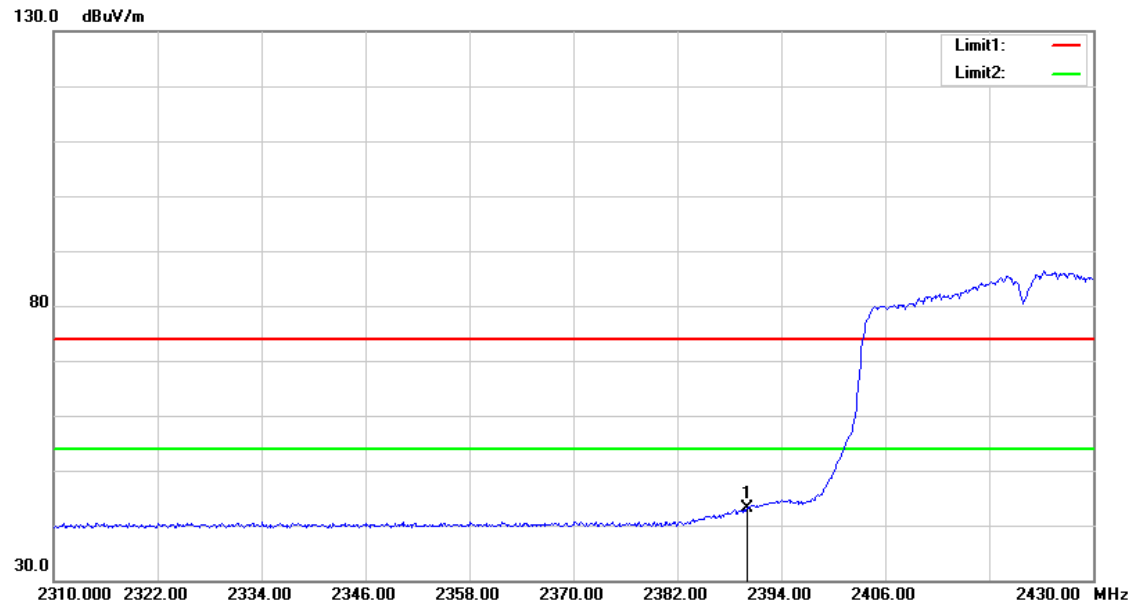


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	46.28	-3.19	43.09	54.00	-10.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

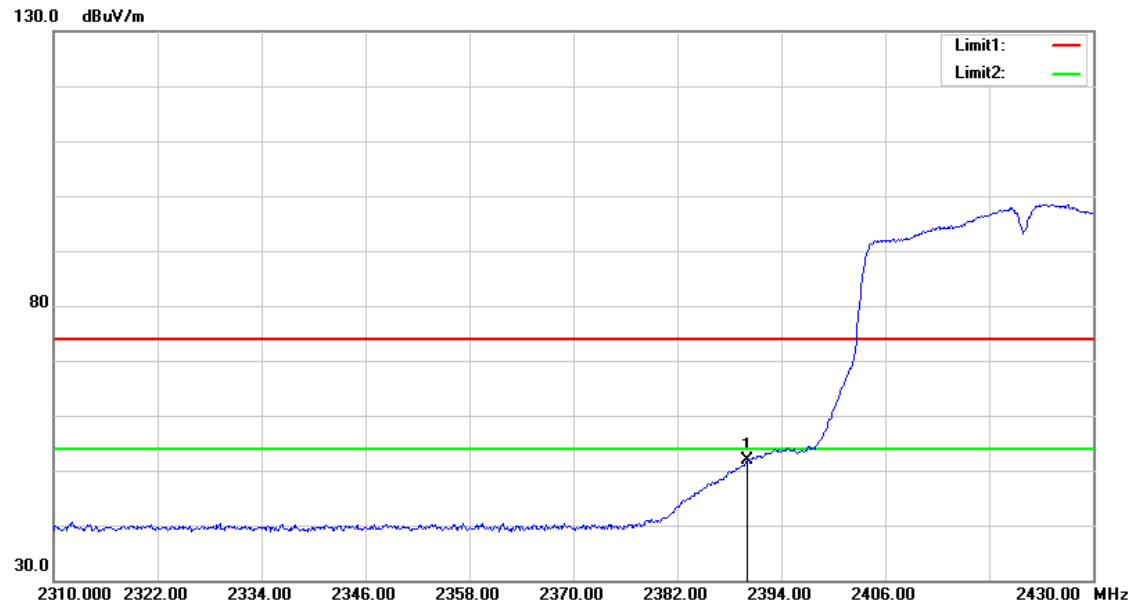


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	54.97	-3.19	51.78	54.00	-2.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

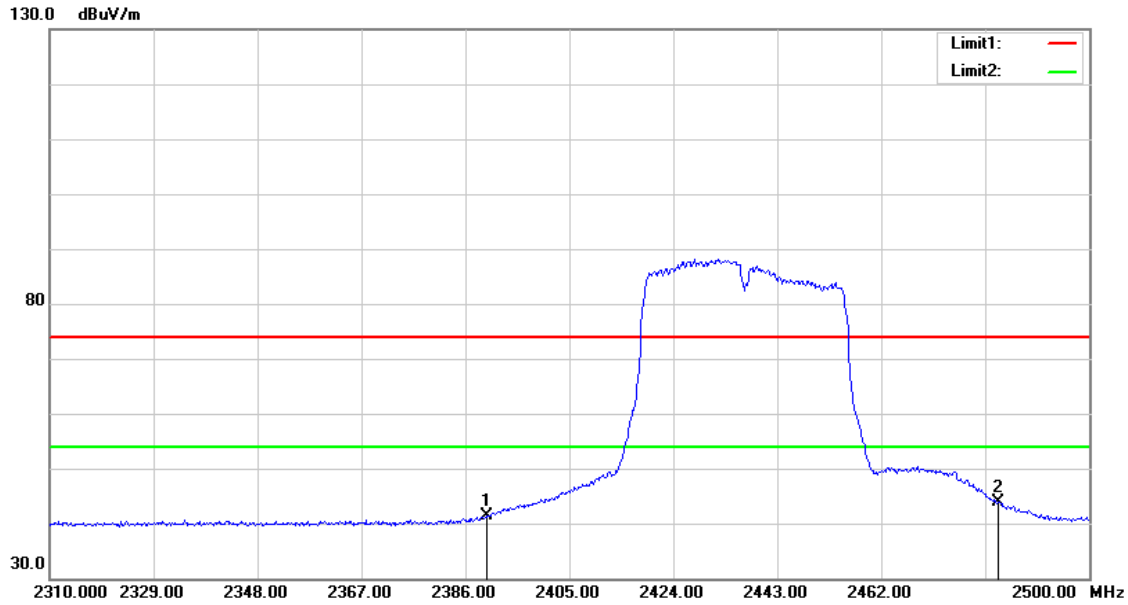


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	44.49	-3.19	41.30	54.00	-12.70	AVG
2	2483.500	46.65	-2.86	43.79	54.00	-10.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

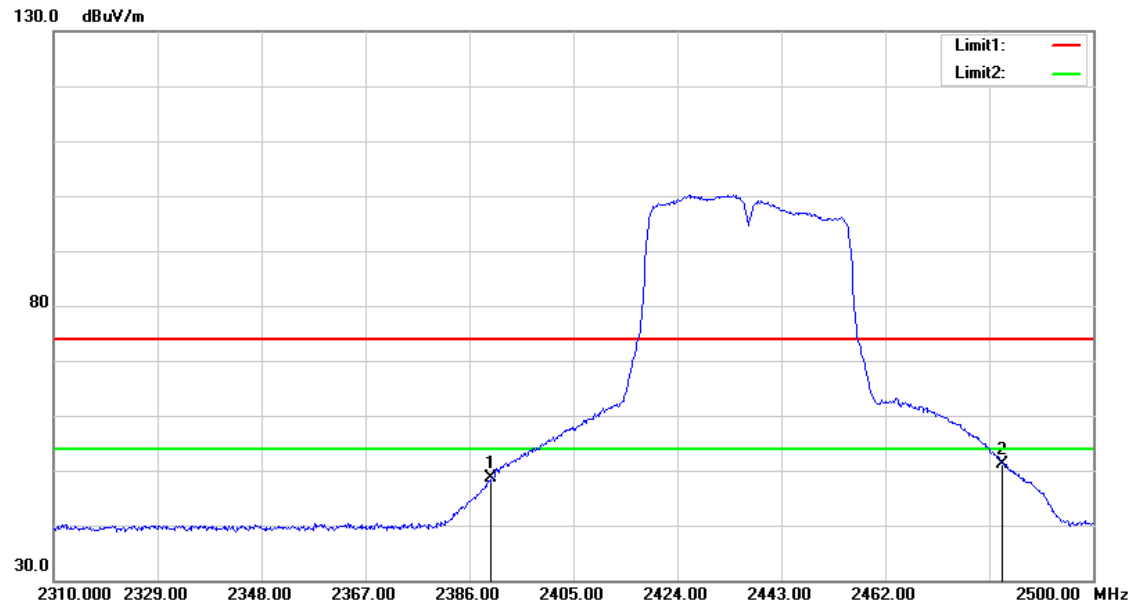


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	51.82	-3.19	48.63	54.00	-5.37	AVG
2	2483.500	54.10	-2.86	51.24	54.00	-2.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

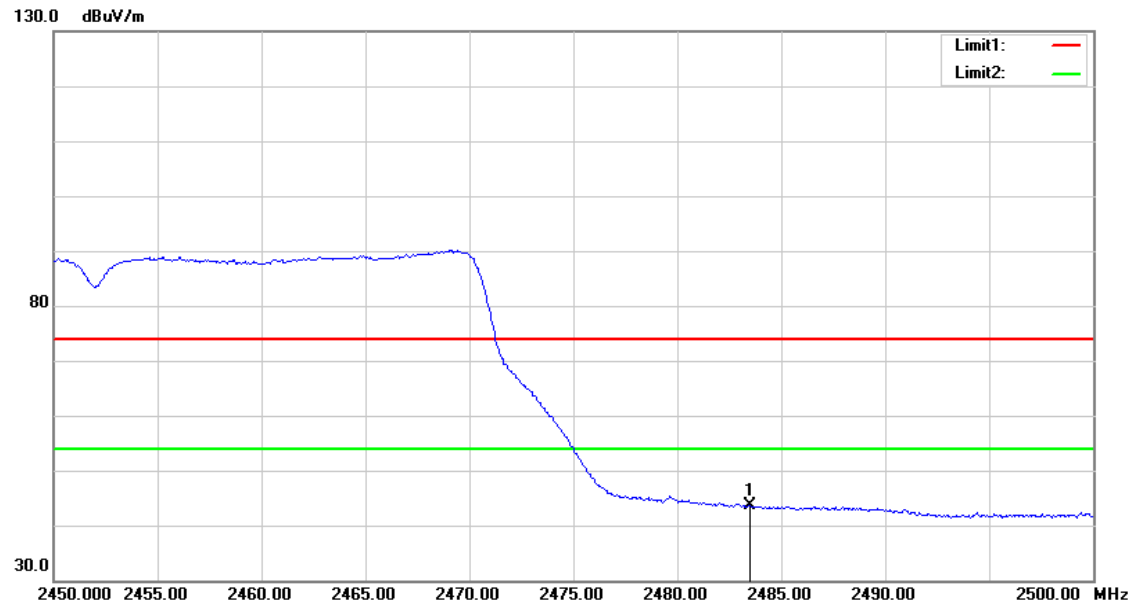


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.50	-2.86	43.64	54.00	-10.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

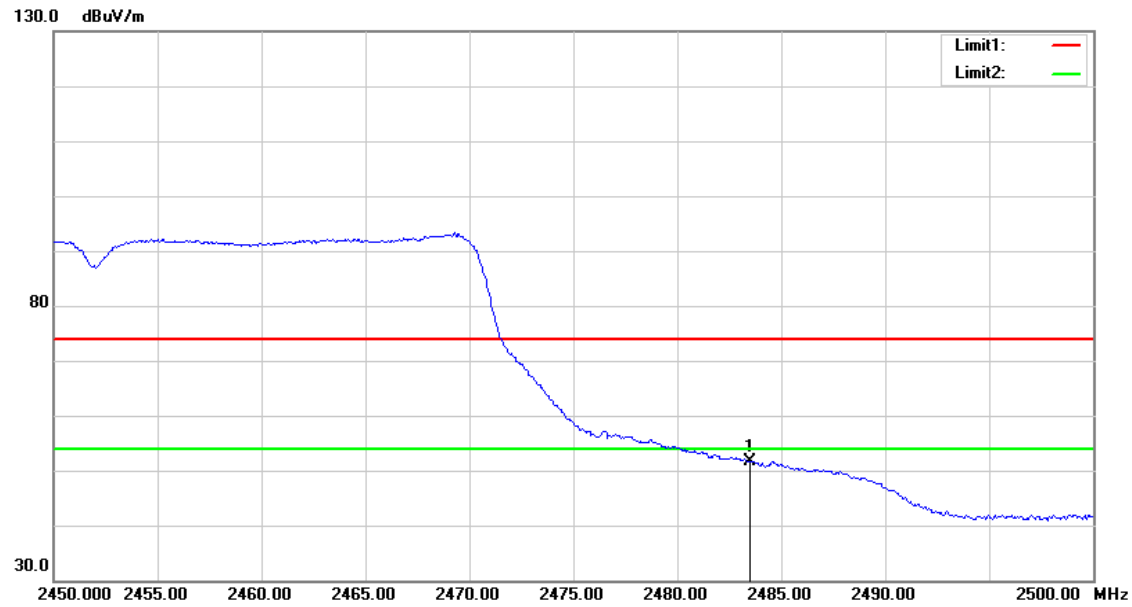

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.59	-2.86	51.73	54.00	-2.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

PIFA Antenna

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

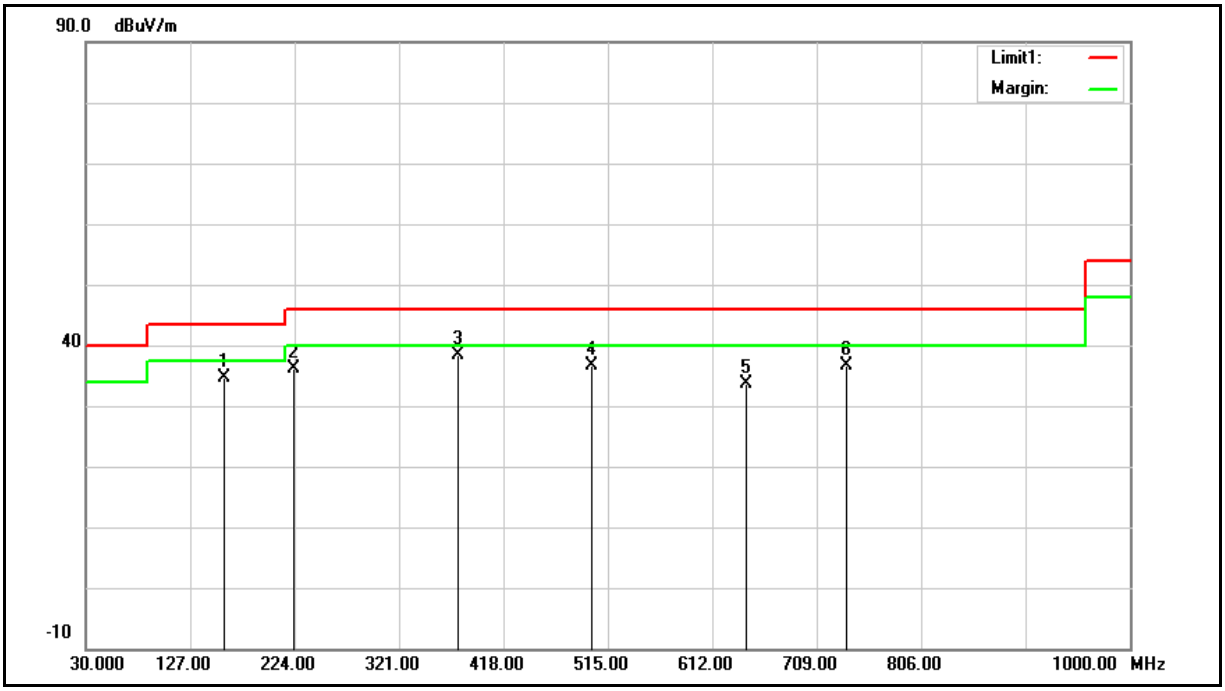

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	158.0400	41.64	-7.02	34.62	43.50	-8.88	QP
2	223.0300	44.92	-8.67	36.25	46.00	-9.75	QP
3	375.3200	42.93	-4.44	38.49	46.00	-7.51	QP
4	500.4500	39.23	-2.61	36.62	46.00	-9.38	QP
5	644.0100	33.45	0.13	33.58	46.00	-12.42	QP
6	736.1600	35.22	1.43	36.65	46.00	-9.35	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 34.62 = -7.02 + 41.64

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

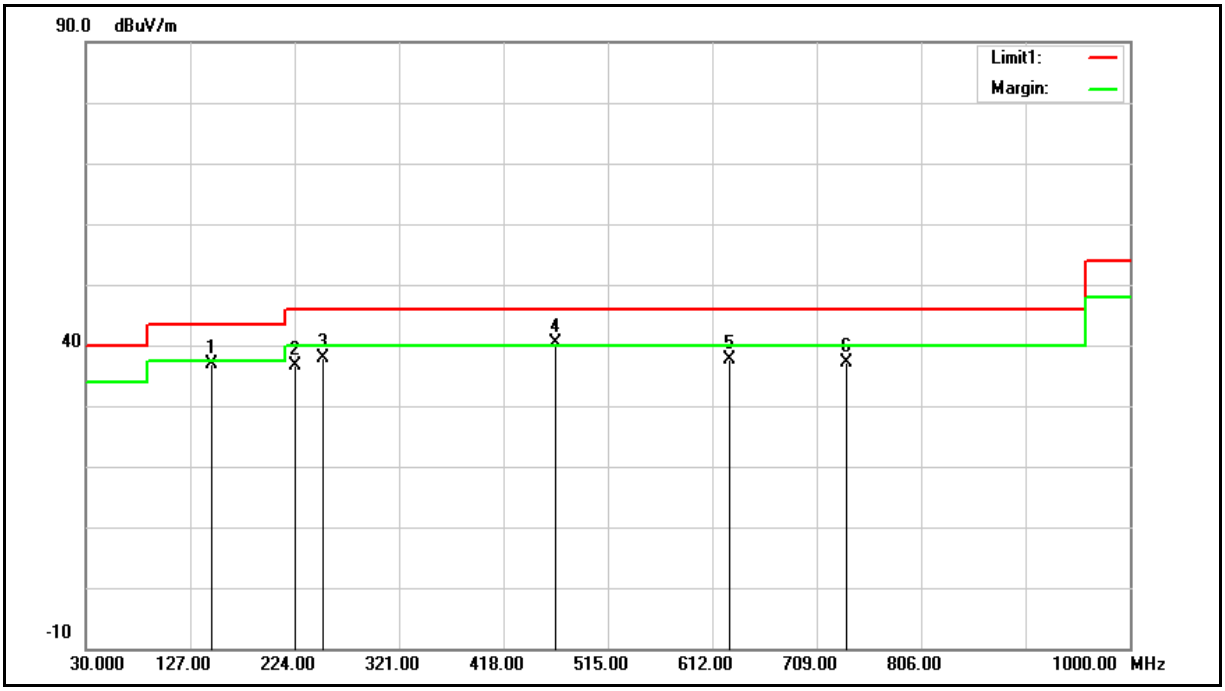

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	44.04	-7.28	36.76	43.50	-6.74	QP
2	224.9700	45.19	-8.55	36.64	46.00	-9.36	QP
3	250.1900	45.40	-7.44	37.96	46.00	-8.04	QP
4	466.5000	43.22	-2.95	40.27	46.00	-5.73	QP
5	628.4900	37.74	-0.01	37.73	46.00	-8.27	QP
6	736.1600	35.69	1.43	37.12	46.00	-8.88	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.76 = -7.28 + 44.04

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

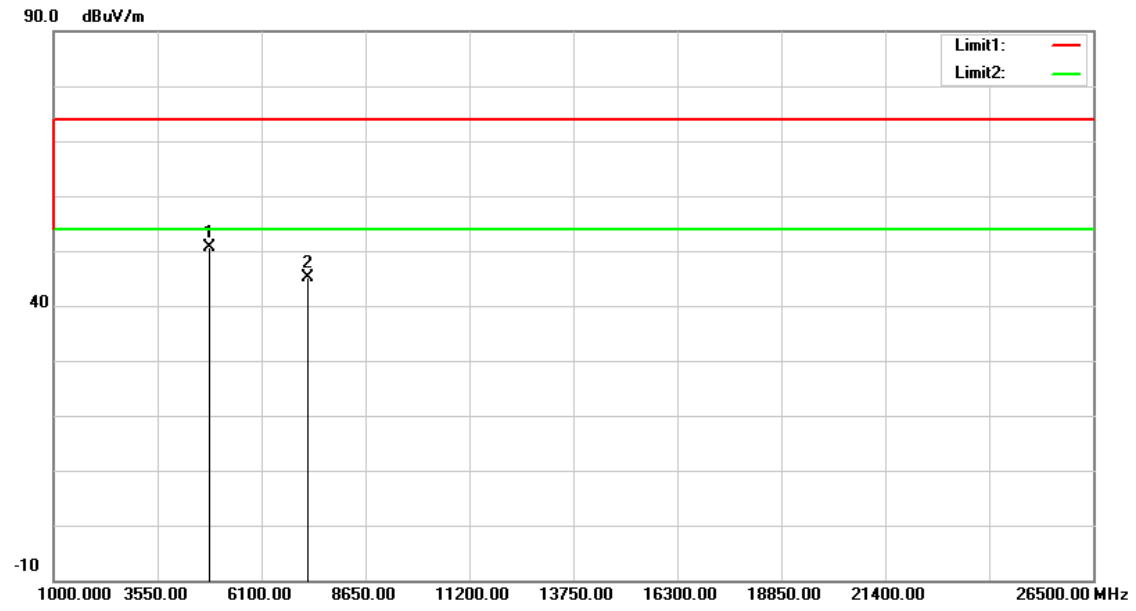

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	47.99	2.72	50.71	74.00	-23.29	peak
2	7236.000	36.82	8.30	45.12	74.00	-28.88	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 50.71 = 2.72 + 47.99

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

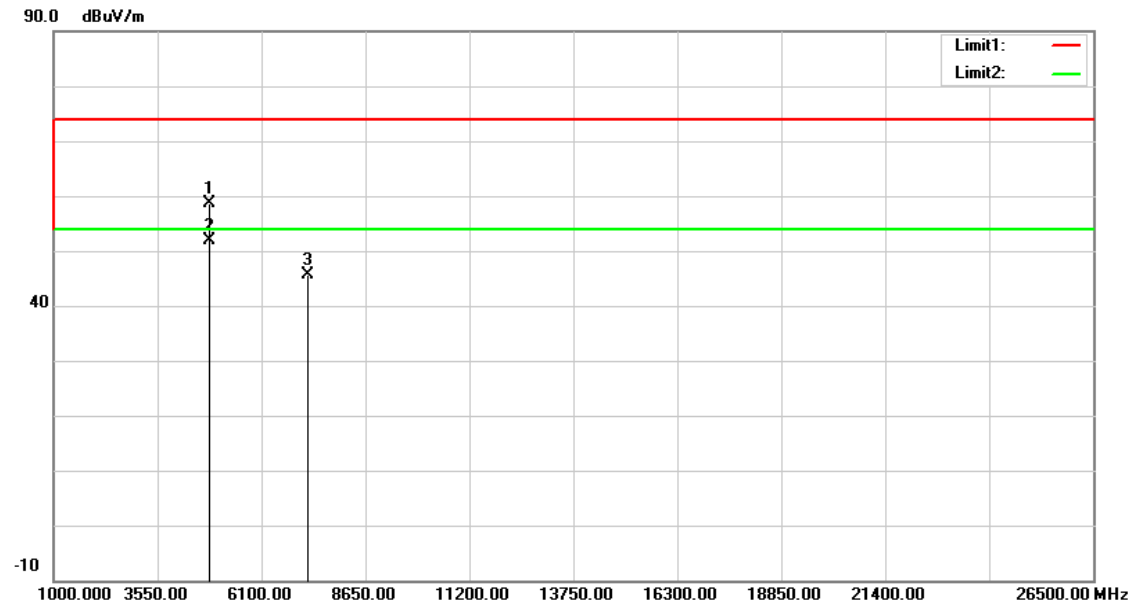

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	55.88	2.72	58.60	74.00	-15.40	peak
2	4824.000	49.25	2.72	51.97	54.00	-2.03	AVG
3	7236.000	37.23	8.30	45.53	74.00	-28.47	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 58.60 = 2.72 + 55.88

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

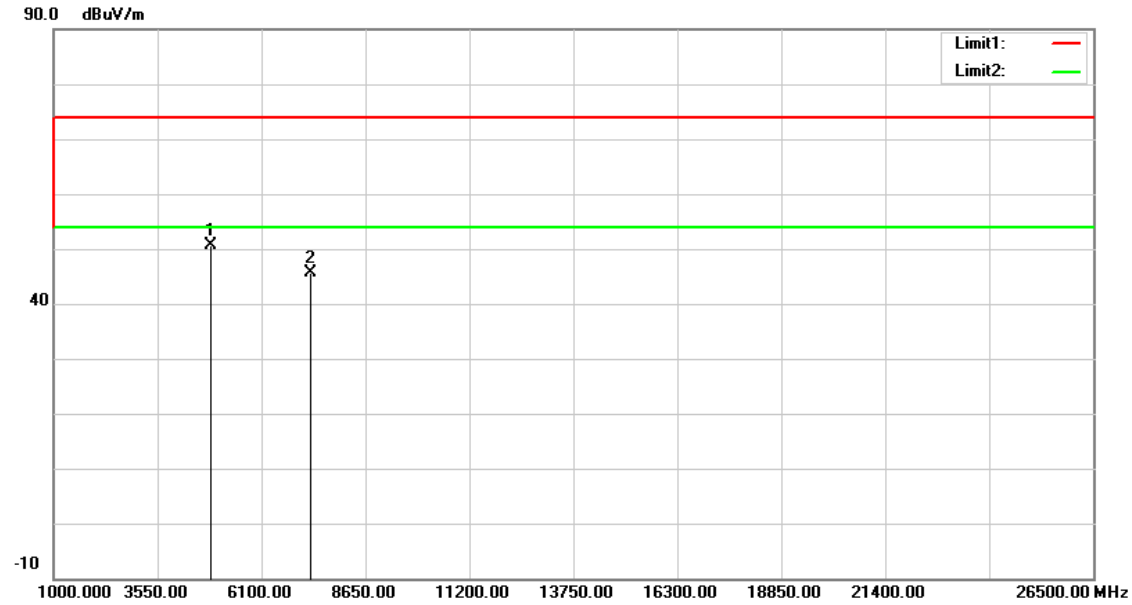


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	47.90	2.84	50.74	74.00	-23.26	peak
2	7311.000	37.15	8.53	45.68	74.00	-28.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

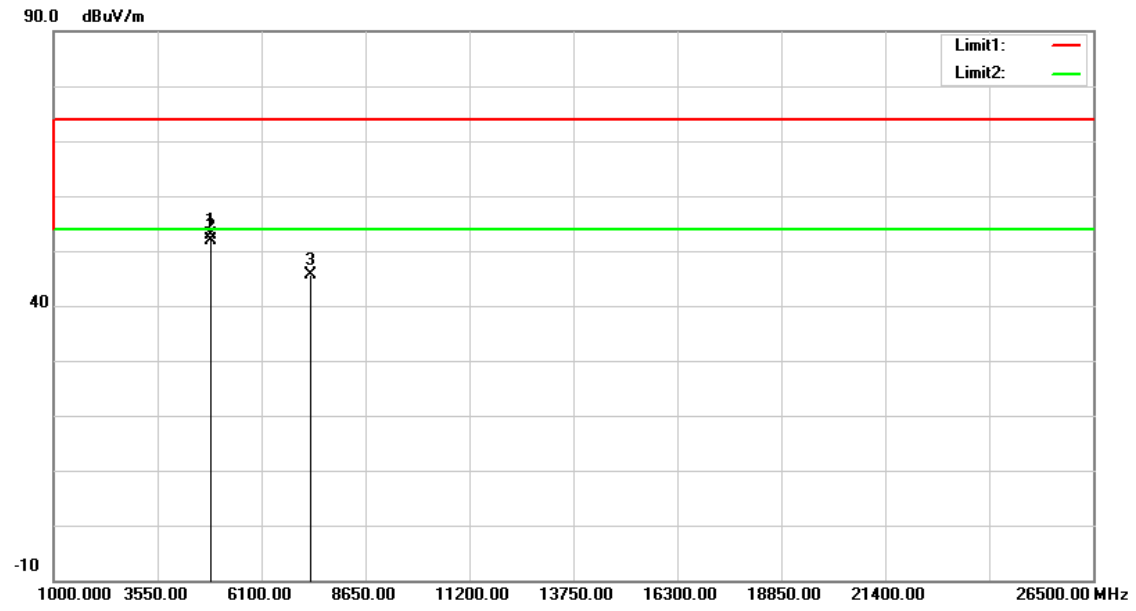


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	50.16	2.84	53.00	74.00	-21.00	peak
2	4874.000	48.98	2.84	51.82	54.00	-2.18	AVG
3	7311.000	37.13	8.53	45.66	74.00	-28.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

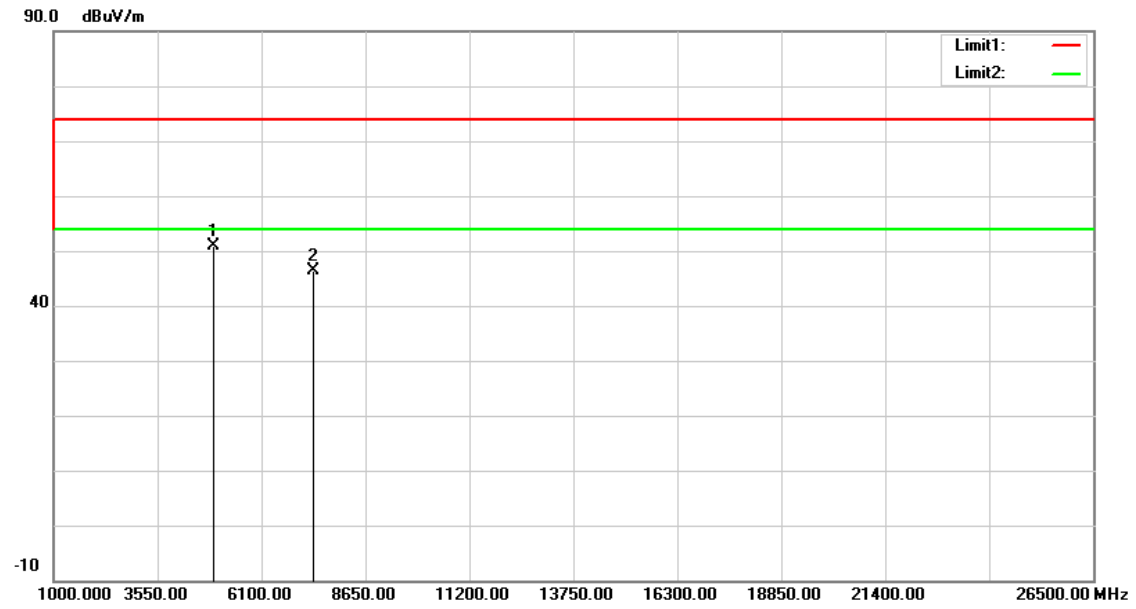


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	47.89	2.96	50.85	74.00	-23.15	peak
2	7386.000	37.52	8.77	46.29	74.00	-27.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

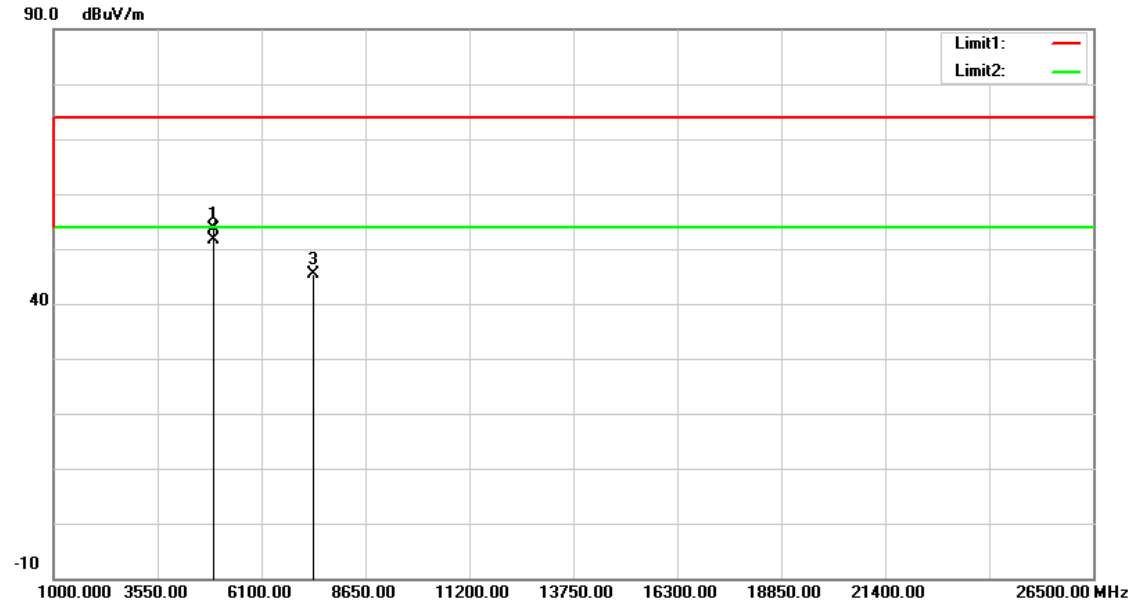


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	50.67	2.96	53.63	74.00	-20.37	peak
2	4924.000	48.66	2.96	51.62	54.00	-2.38	AVG
3	7386.000	36.68	8.77	45.45	74.00	-28.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

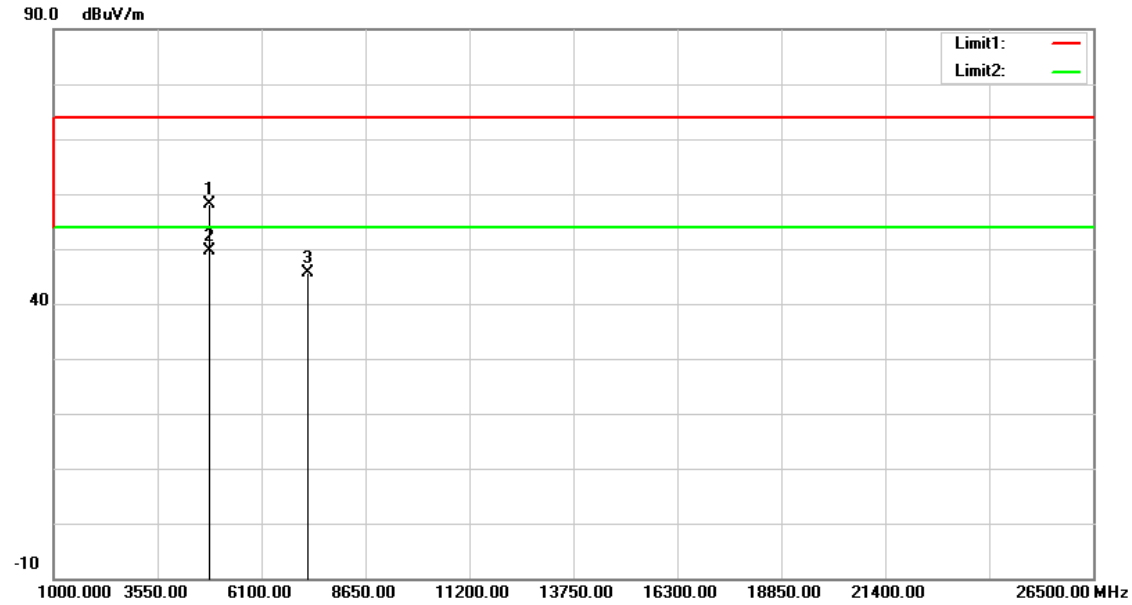


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	55.36	2.72	58.08	74.00	-15.92	peak
2	4824.000	46.99	2.72	49.71	54.00	-4.29	AVG
3	7236.000	37.32	8.30	45.62	74.00	-28.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

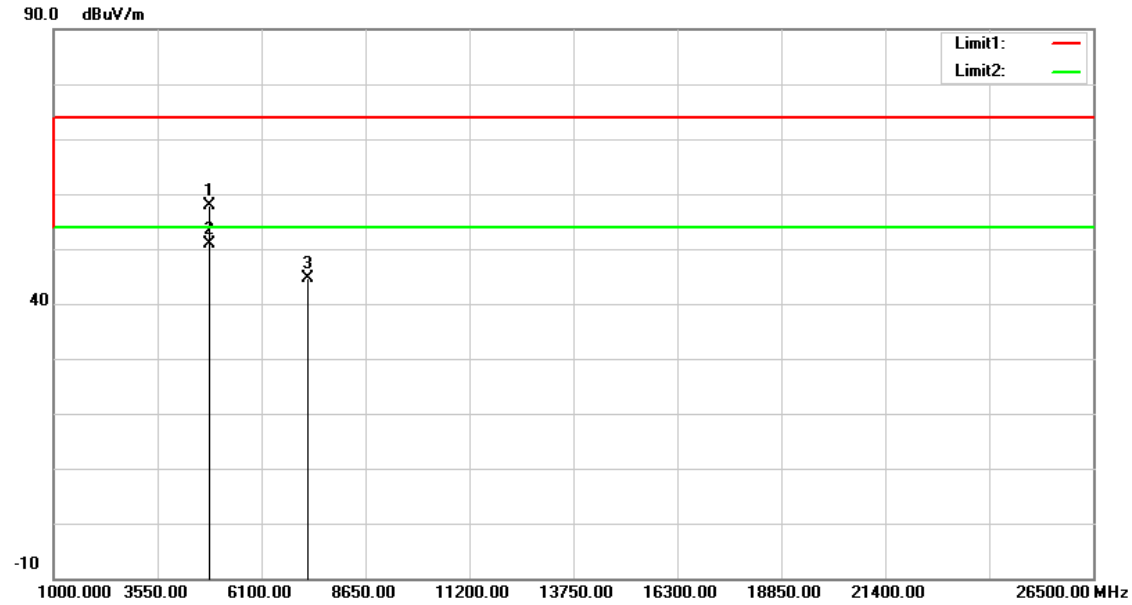


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	55.28	2.72	58.00	74.00	-16.00	peak
2	4824.000	48.08	2.72	50.80	54.00	-3.20	AVG
3	7236.000	36.45	8.30	44.75	74.00	-29.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

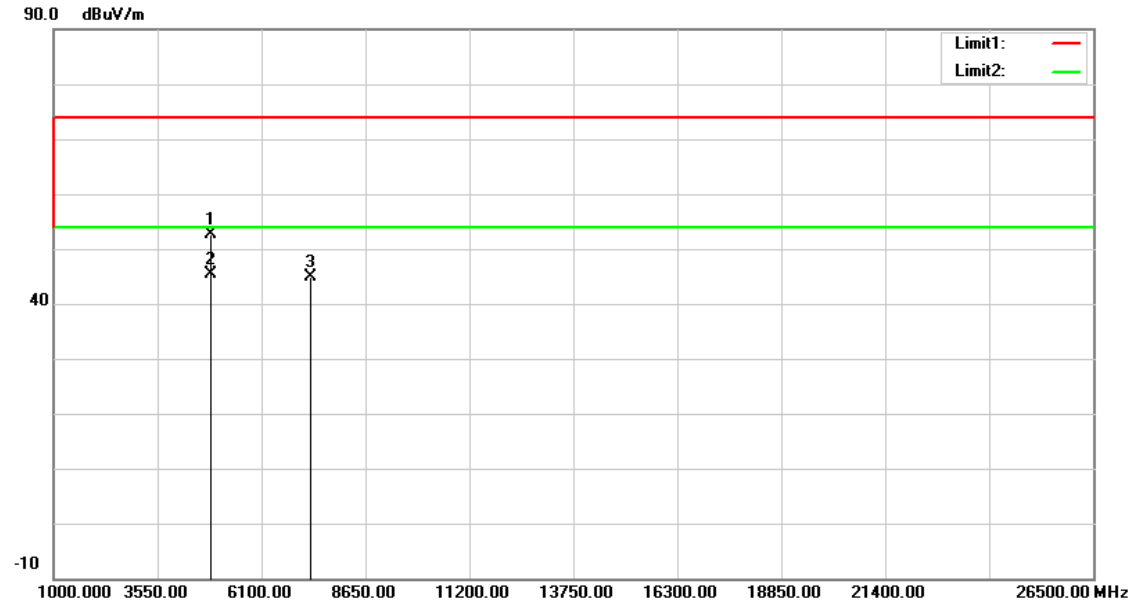


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.79	2.84	52.63	74.00	-21.37	peak
2	4874.000	42.58	2.84	45.42	54.00	-8.58	AVG
3	7311.000	36.47	8.53	45.00	74.00	-29.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

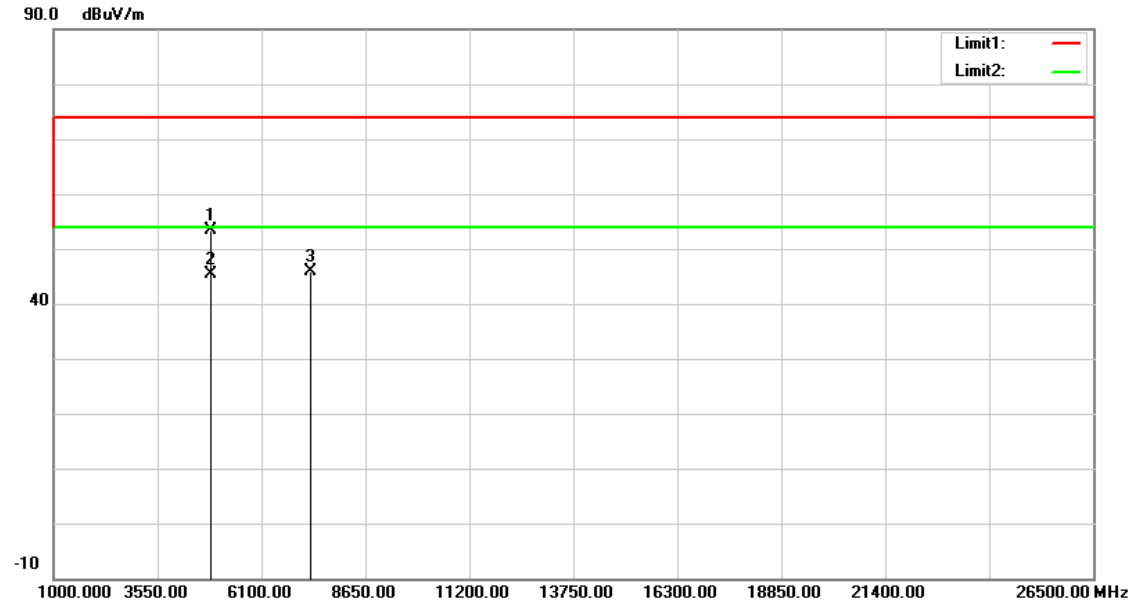


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	50.56	2.84	53.40	74.00	-20.60	peak
2	4874.000	42.62	2.84	45.46	54.00	-8.54	AVG
3	7311.000	37.39	8.53	45.92	74.00	-28.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

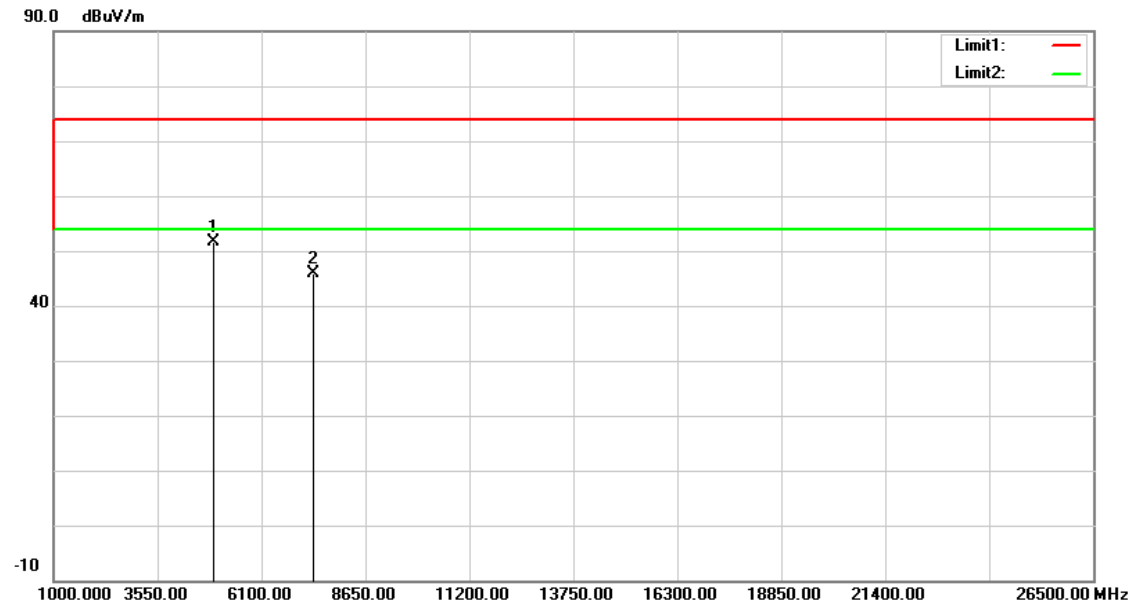


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.58	2.96	51.54	74.00	-22.46	peak
2	7386.000	37.12	8.77	45.89	74.00	-28.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

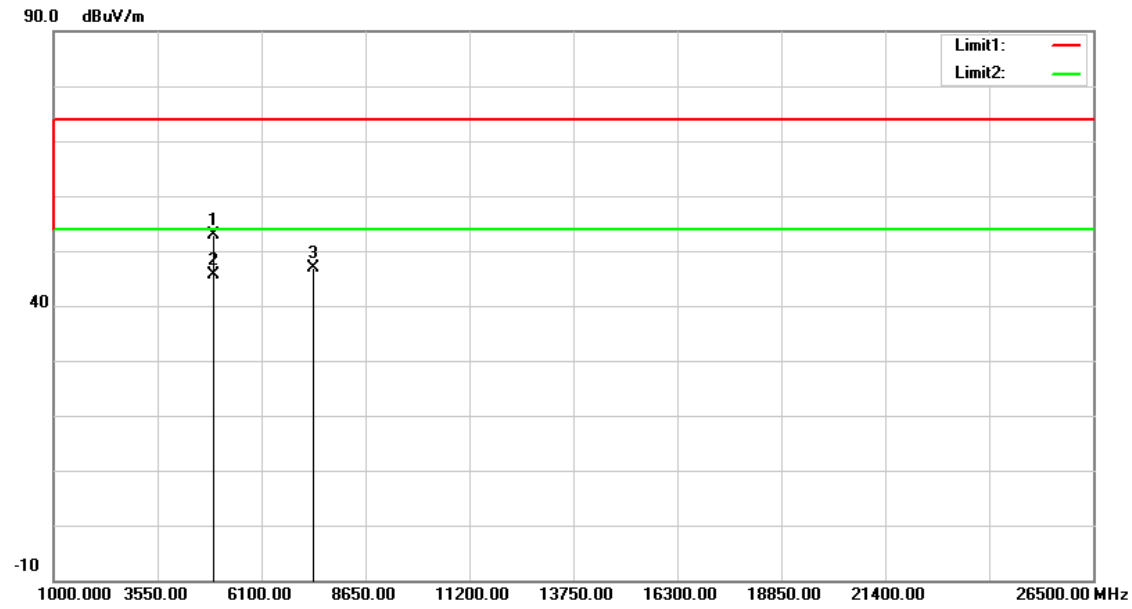


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	49.87	2.96	52.83	74.00	-21.17	peak
2	4924.000	42.64	2.96	45.60	54.00	-8.40	AVG
3	7386.000	38.08	8.77	46.85	74.00	-27.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

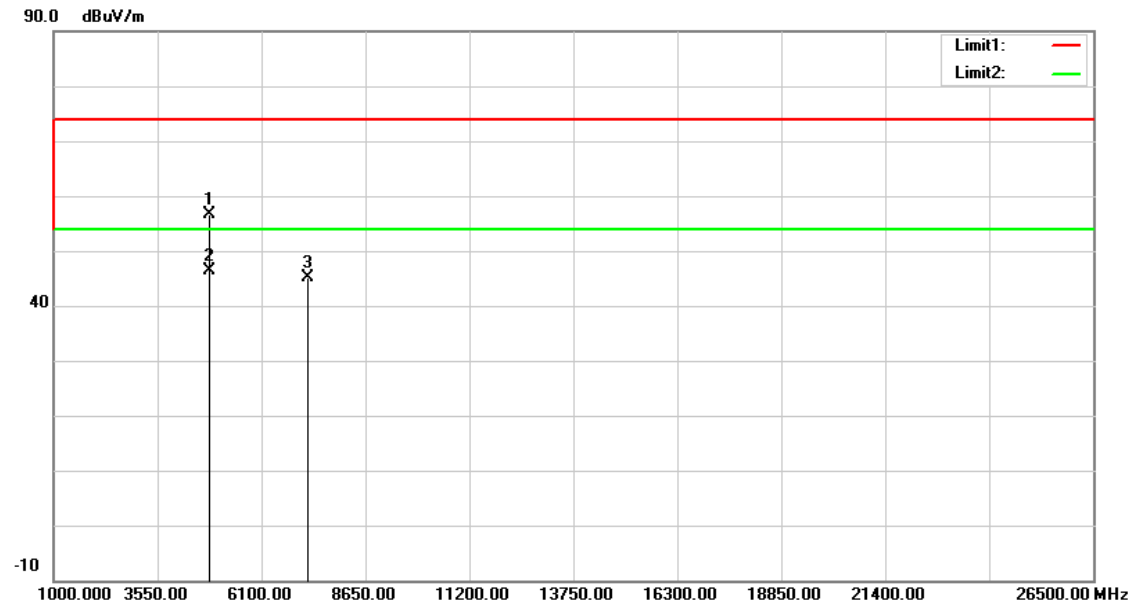


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	53.83	2.72	56.55	74.00	-17.45	peak
2	4824.000	43.60	2.72	46.32	54.00	-7.68	AVG
3	7236.000	36.83	8.30	45.13	74.00	-28.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

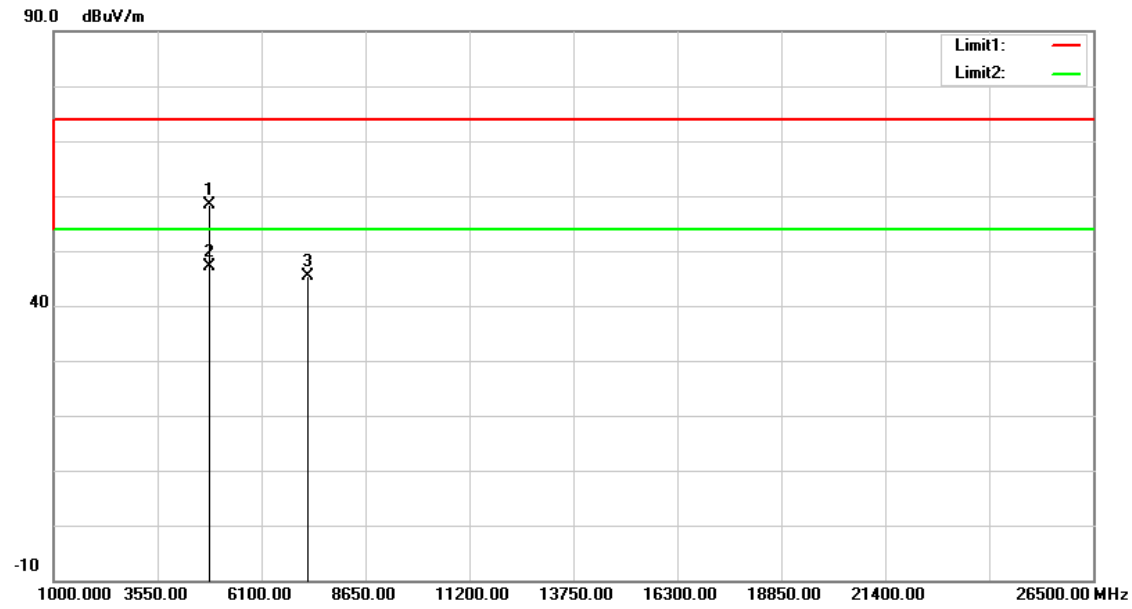


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	55.68	2.72	58.40	74.00	-15.60	peak
2	4824.000	44.48	2.72	47.20	54.00	-6.80	AVG
3	7236.000	37.17	8.30	45.47	74.00	-28.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

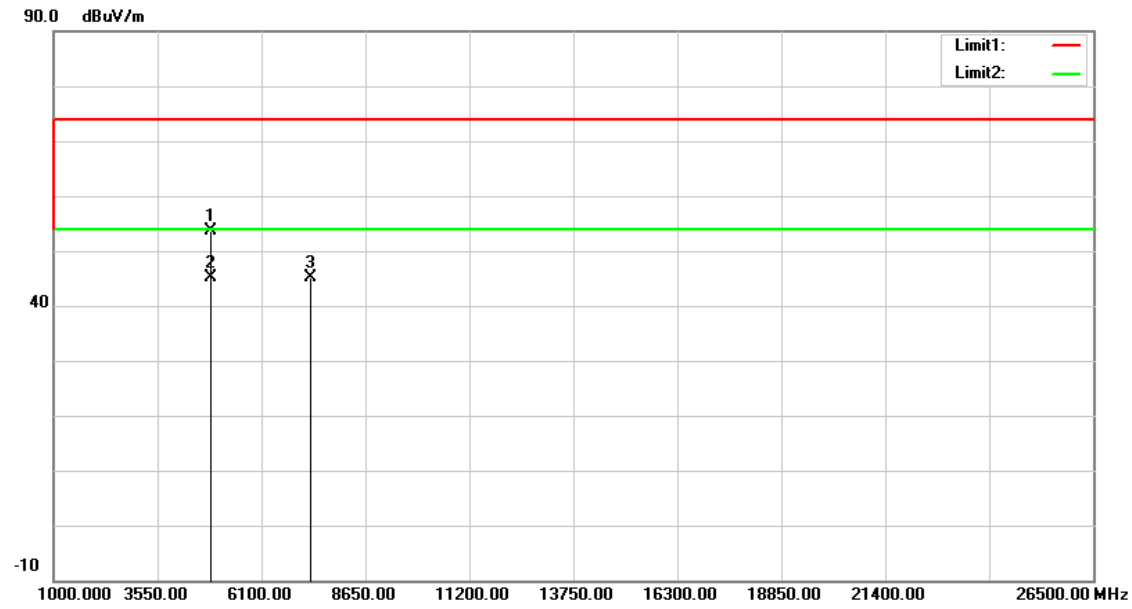


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	50.67	2.84	53.51	74.00	-20.49	peak
2	4874.000	42.37	2.84	45.21	54.00	-8.79	AVG
3	7311.000	36.69	8.53	45.22	74.00	-28.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

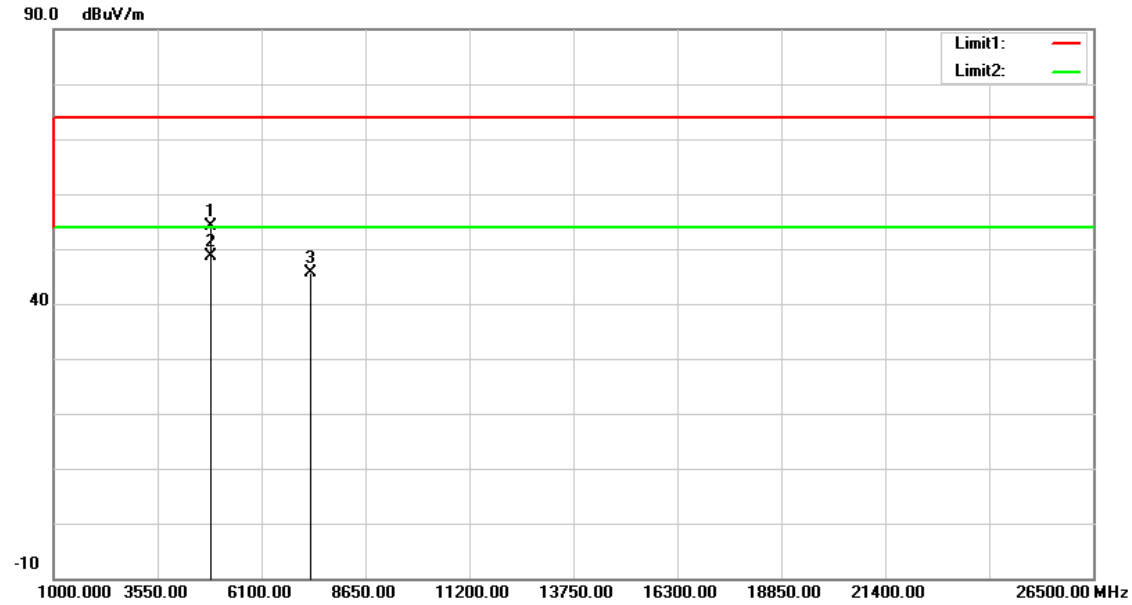


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	51.36	2.84	54.20	74.00	-19.80	peak
2	4874.000	45.79	2.84	48.63	54.00	-5.37	AVG
3	7311.000	37.03	8.53	45.56	74.00	-28.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

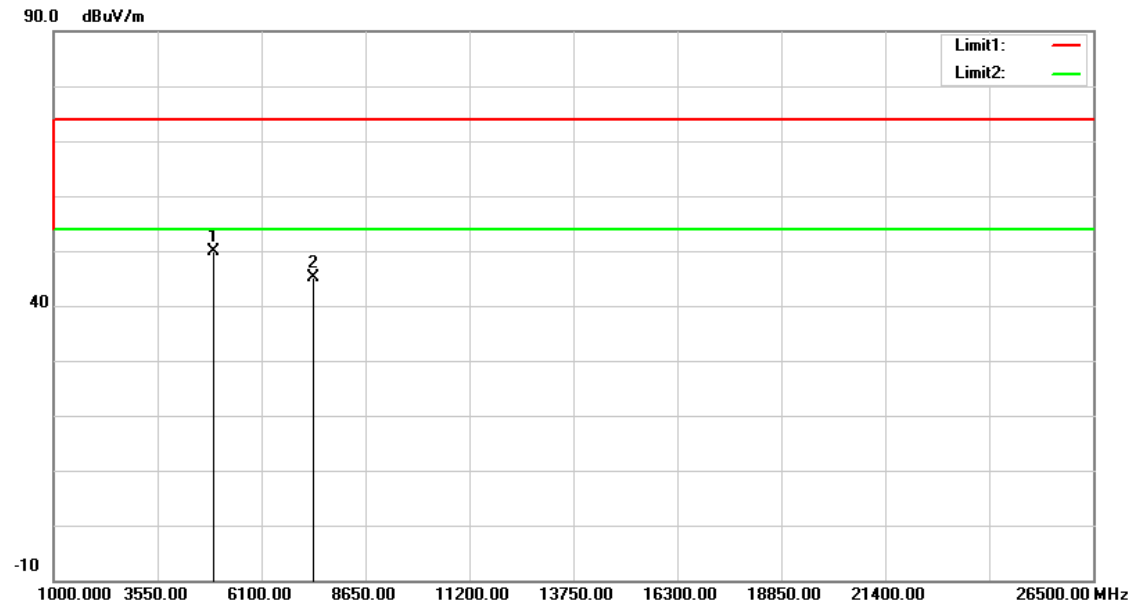


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	47.00	2.96	49.96	74.00	-24.04	peak
2	7386.000	36.38	8.77	45.15	74.00	-28.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

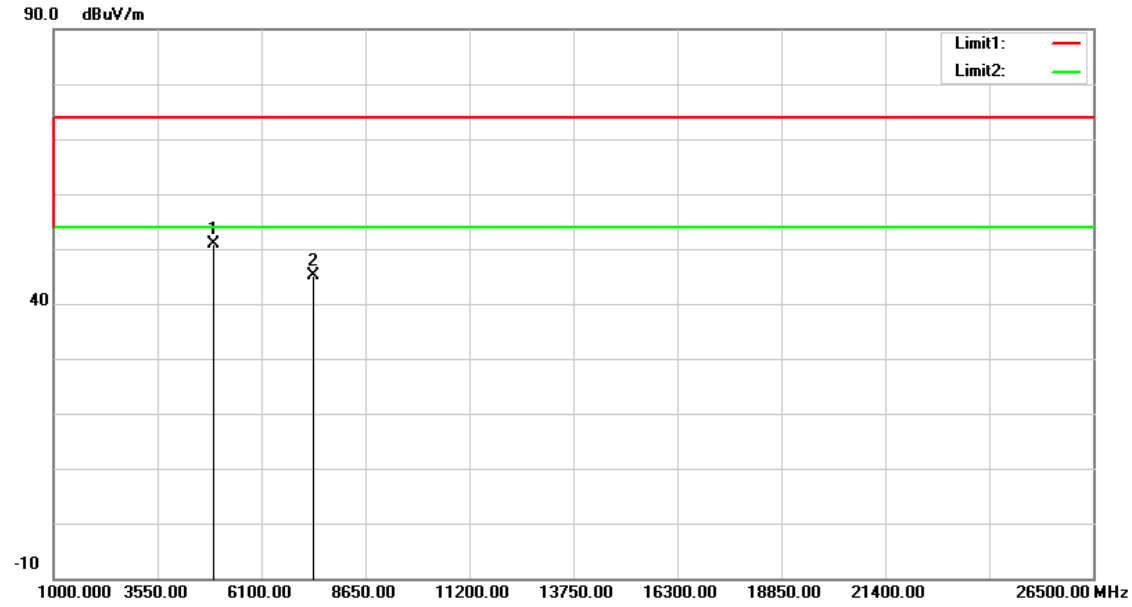


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	47.91	2.96	50.87	74.00	-23.13	peak
2	7386.000	36.25	8.77	45.02	74.00	-28.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

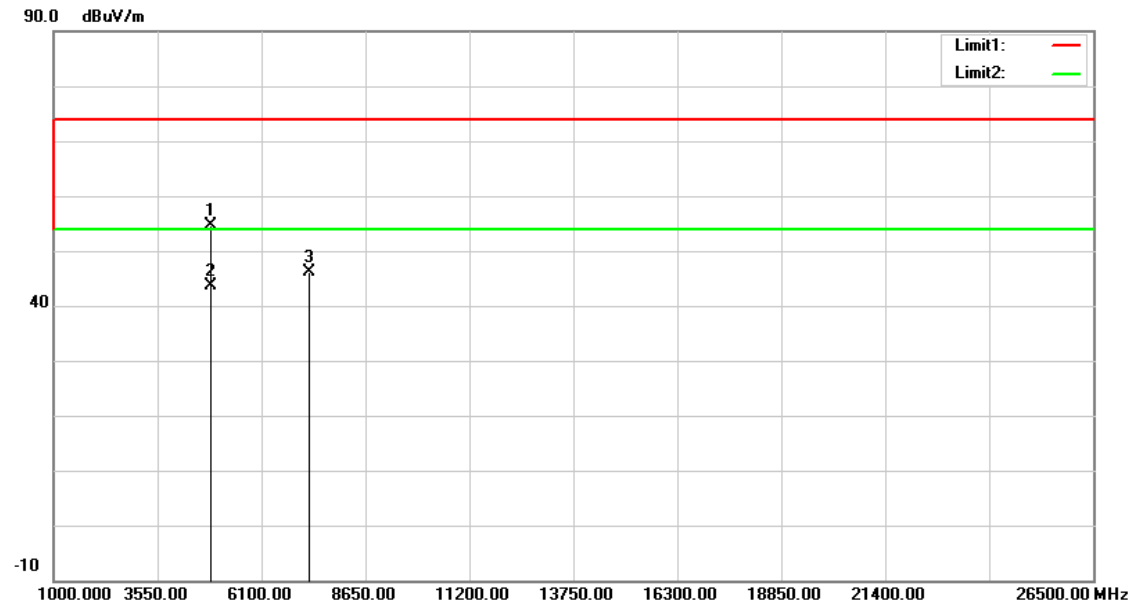


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	51.75	2.78	54.53	74.00	-19.47	peak
2	4844.000	40.73	2.78	43.51	54.00	-10.49	AVG
3	7266.000	37.86	8.39	46.25	74.00	-27.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

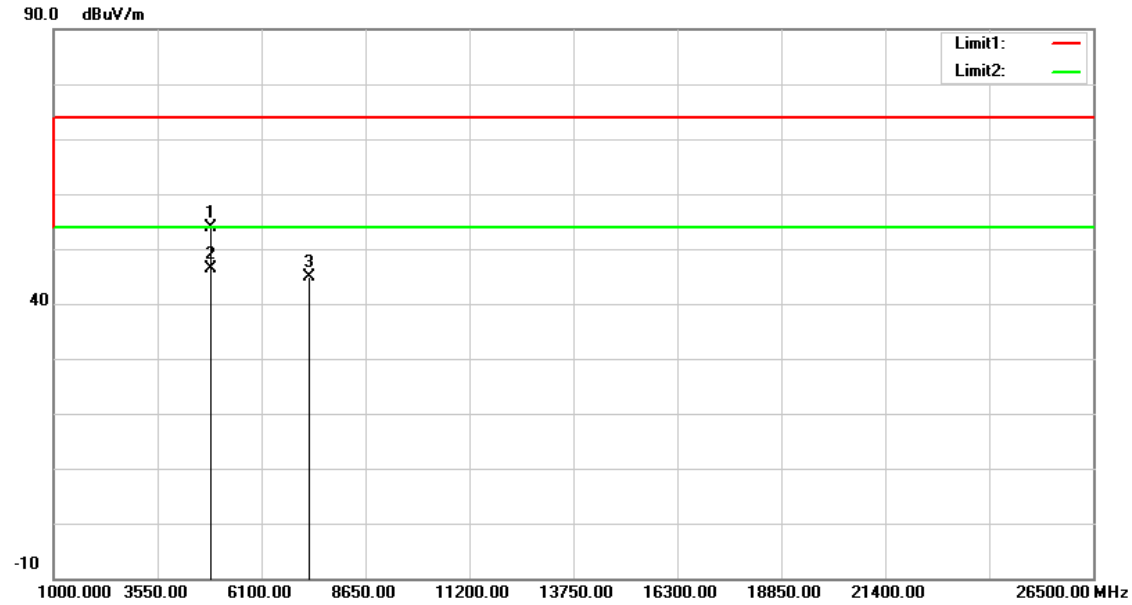


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	51.06	2.78	53.84	74.00	-20.16	peak
2	4844.000	43.65	2.78	46.43	54.00	-7.57	AVG
3	7266.000	36.51	8.39	44.90	74.00	-29.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

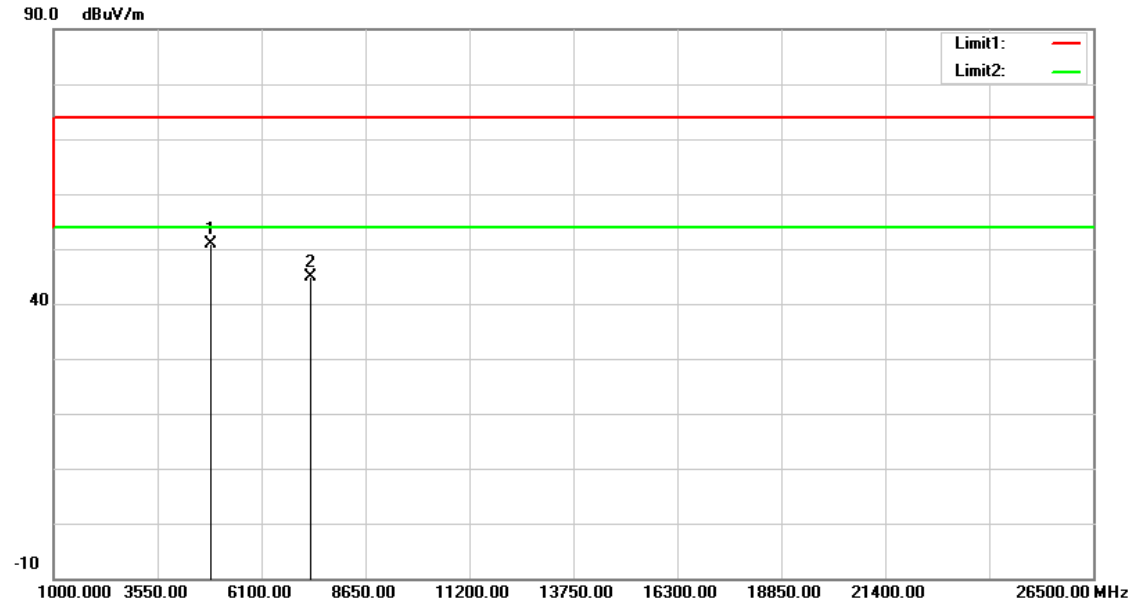


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.12	2.84	50.96	74.00	-23.04	peak
2	7311.000	36.41	8.53	44.94	74.00	-29.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

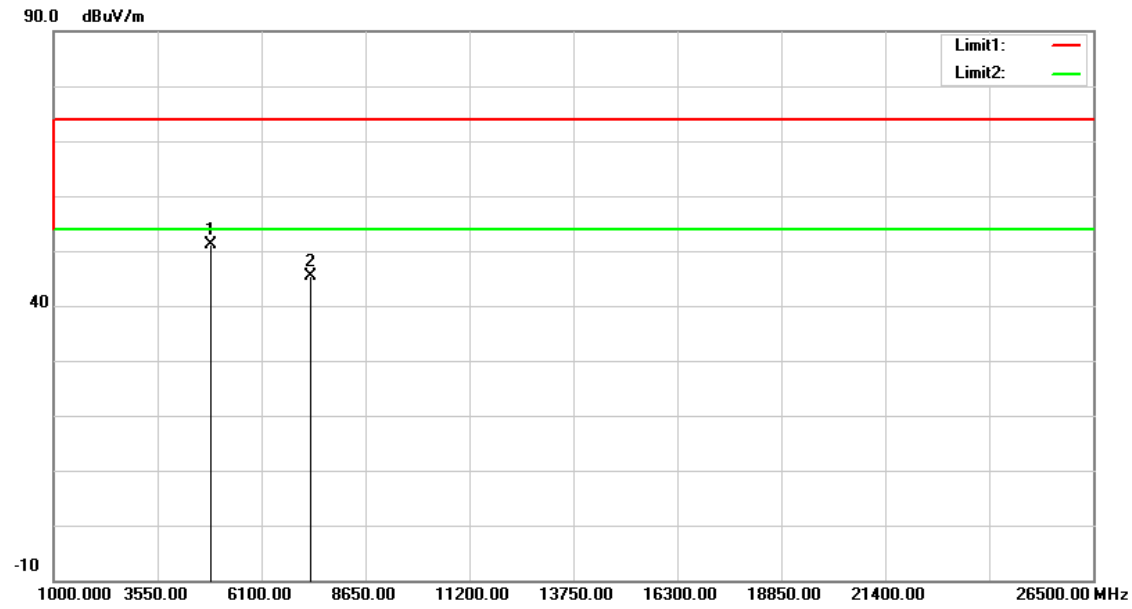


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.39	2.84	51.23	74.00	-22.77	peak
2	7311.000	36.94	8.53	45.47	74.00	-28.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

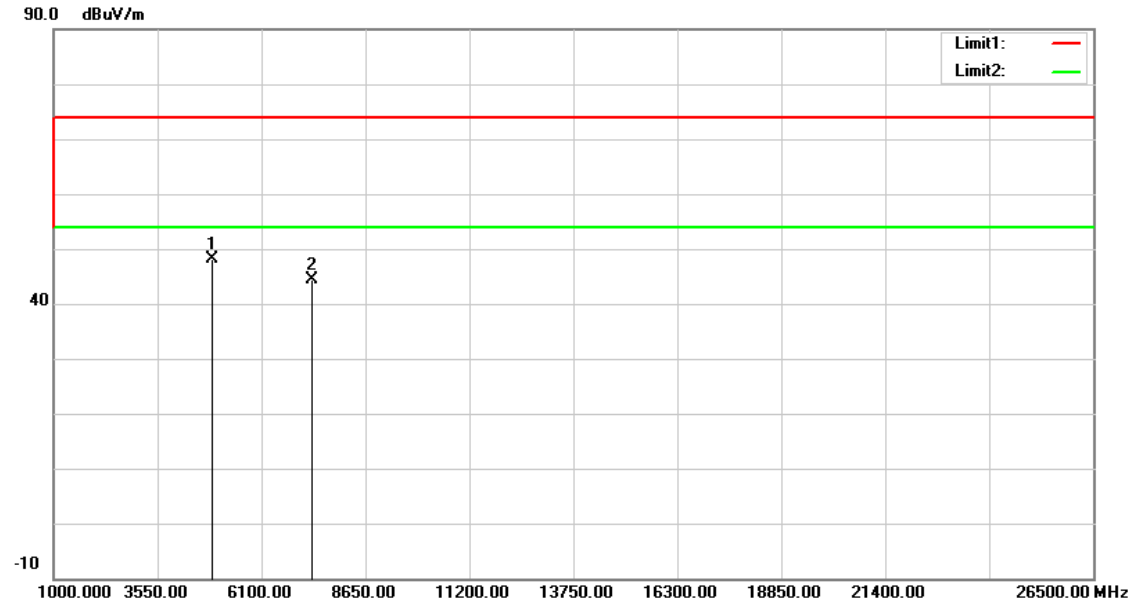


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	45.23	2.91	48.14	74.00	-25.86	peak
2	7356.000	35.69	8.68	44.37	74.00	-29.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

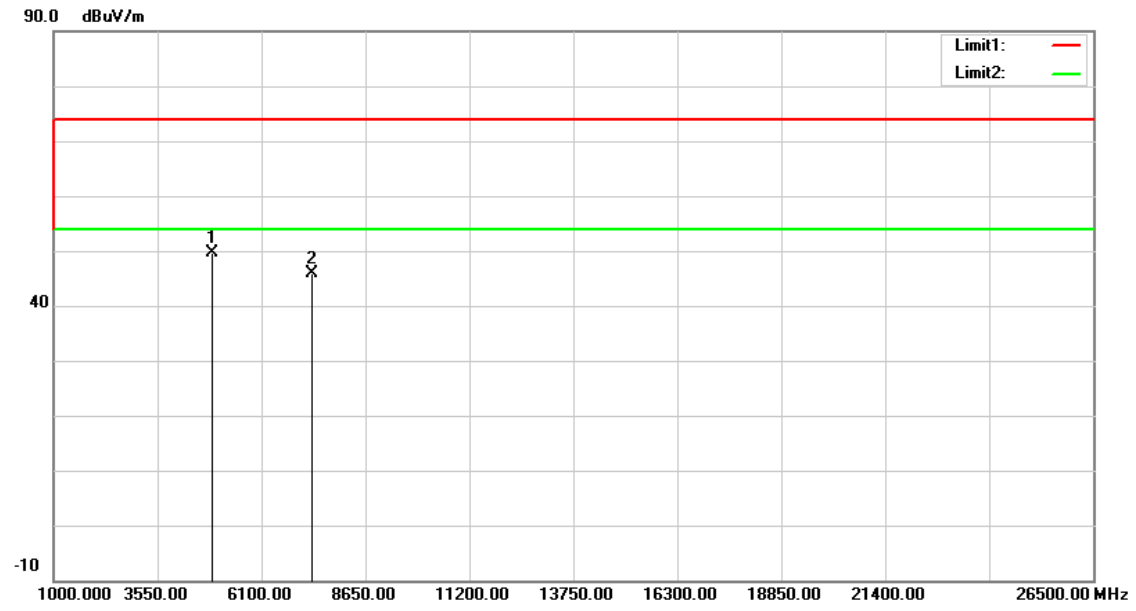


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	46.68	2.91	49.59	74.00	-24.41	peak
2	7356.000	37.22	8.68	45.90	74.00	-28.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		
Description:			

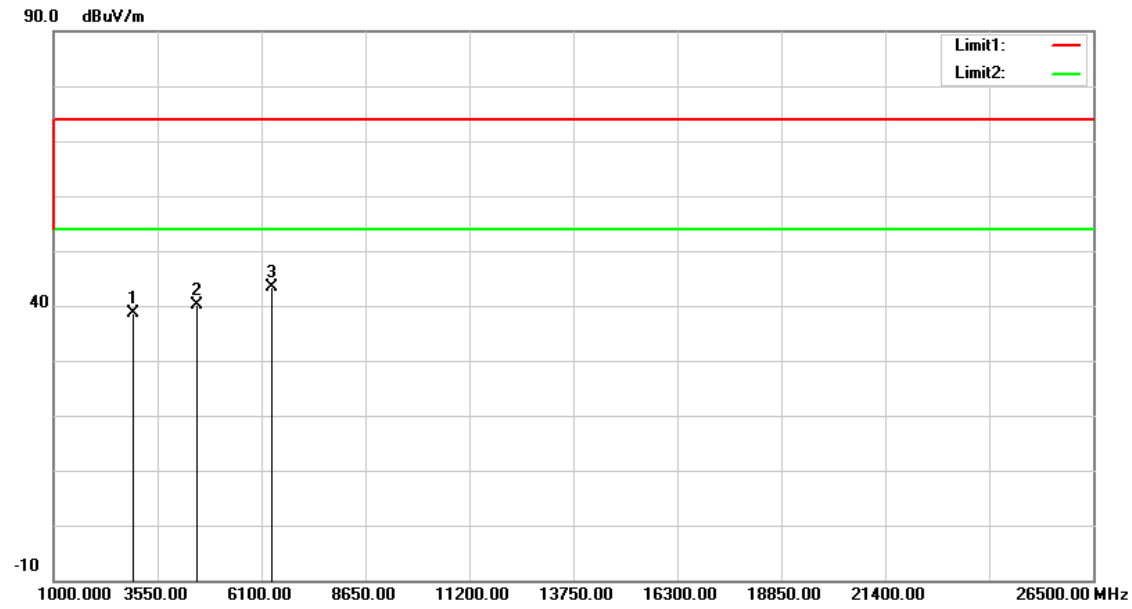


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2938.000	40.13	-1.56	38.57	74.00	-35.43	peak
2	4519.000	38.26	1.97	40.23	74.00	-33.77	peak
3	6355.000	37.62	5.83	43.45	74.00	-30.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Vertical		
Description:			

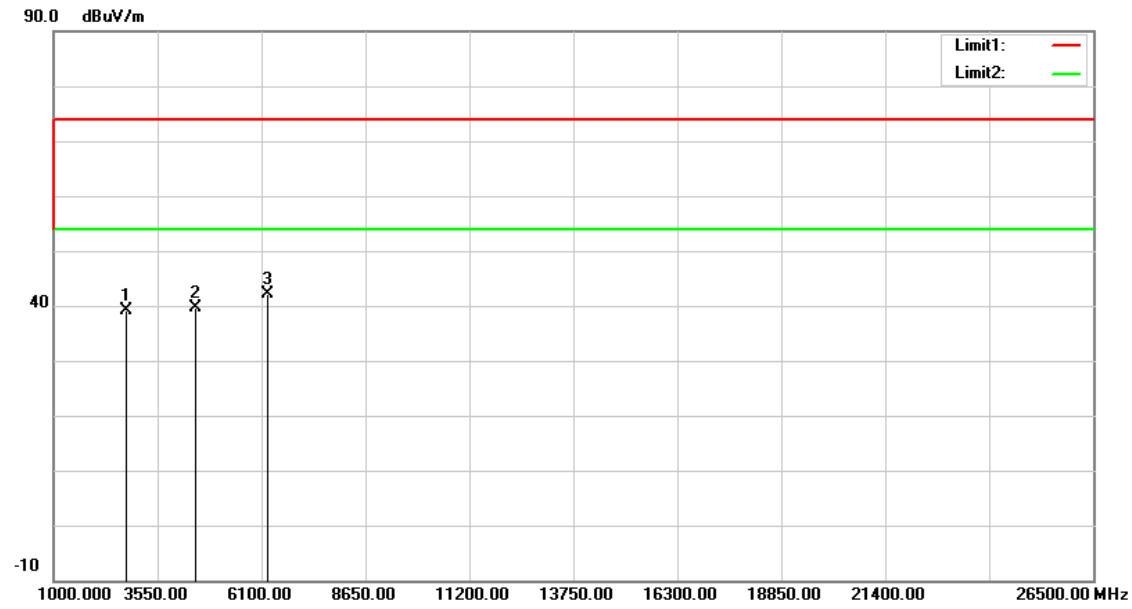

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	41.03	-1.99	39.04	74.00	-34.96	peak
2	4485.000	37.86	1.89	39.75	74.00	-34.25	peak
3	6253.000	36.57	5.48	42.05	74.00	-31.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

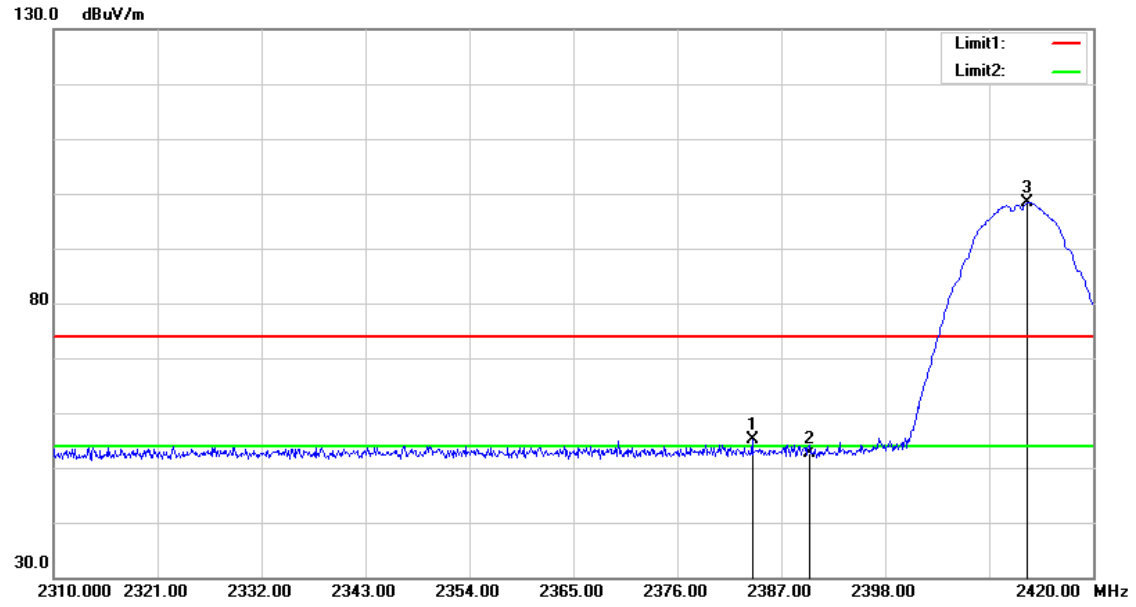


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.920	58.26	-3.22	55.04	74.00	-18.96	peak
2	2390.000	55.78	-3.19	52.59	74.00	-21.41	peak
3	2413.070	101.51	-3.10	98.41	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

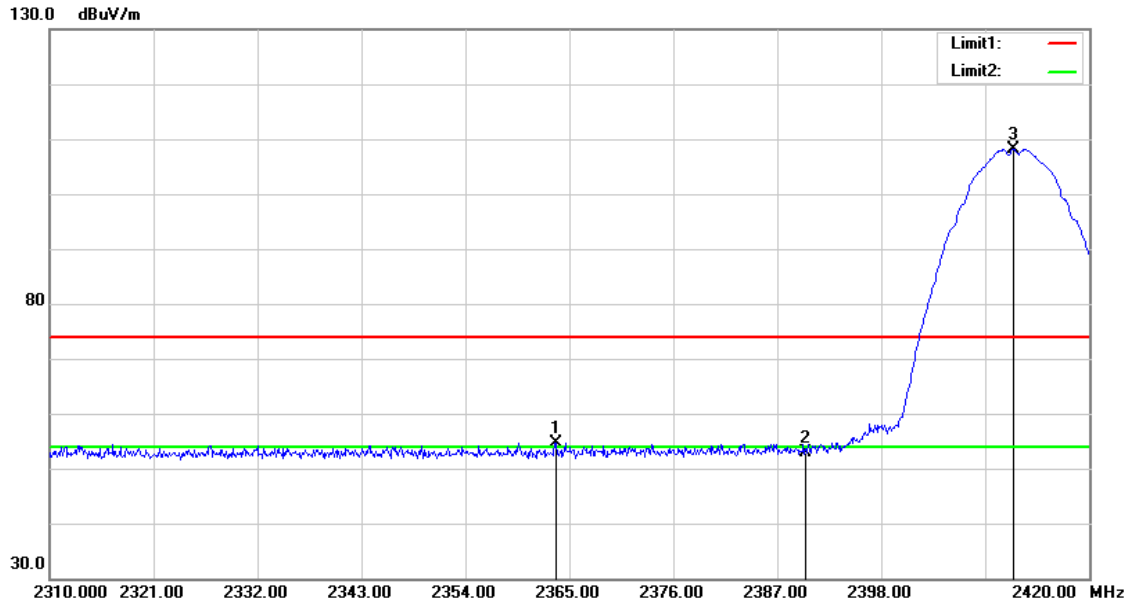


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.570	58.03	-3.28	54.75	74.00	-19.25	peak
2	2390.000	56.09	-3.19	52.90	74.00	-21.10	peak
3	2411.970	111.23	-3.12	108.11	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

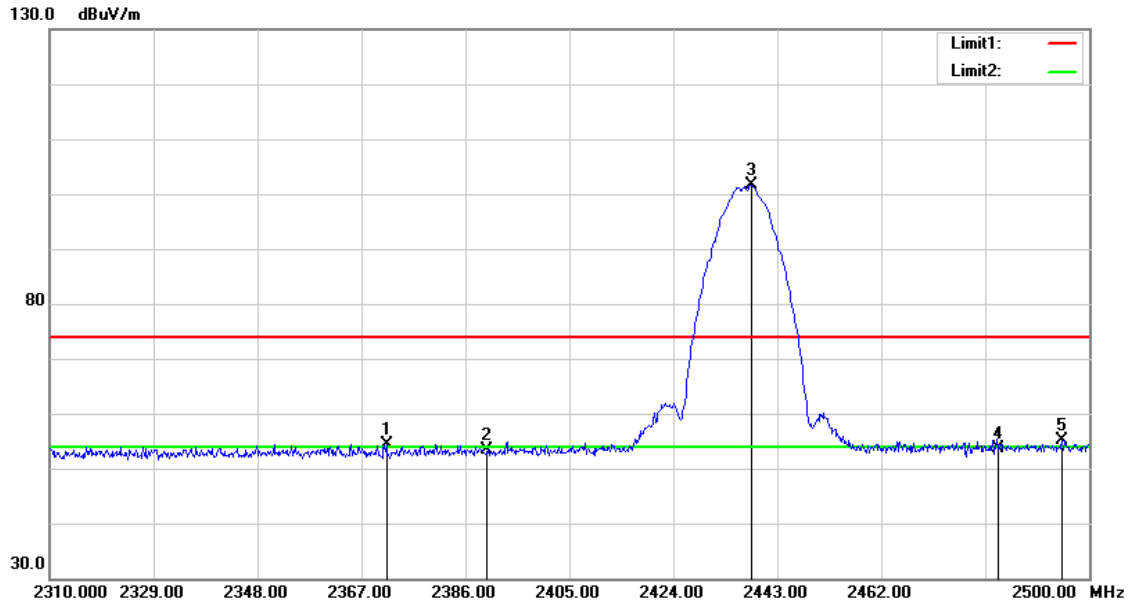


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.560	57.68	-3.26	54.42	74.00	-19.58	peak
2	2390.000	56.61	-3.19	53.42	74.00	-20.58	peak
3	2438.250	104.57	-3.02	101.55	--	--	peak
4	2483.500	56.44	-2.86	53.58	74.00	-20.42	peak
5	2495.060	57.94	-2.81	55.13	74.00	-18.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

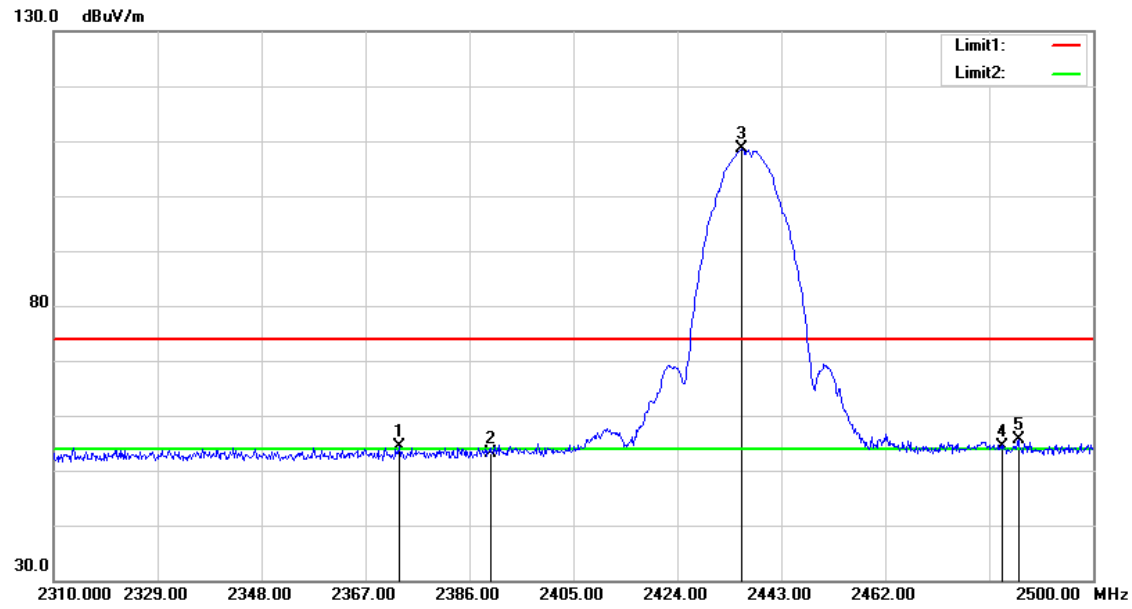


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.270	57.56	-3.24	54.32	74.00	-19.68	peak
2	2390.000	56.34	-3.19	53.15	74.00	-20.85	peak
3	2435.780	111.56	-3.03	108.53	--	--	peak
4	2483.500	57.19	-2.86	54.33	74.00	-19.67	peak
5	2486.320	58.37	-2.85	55.52	74.00	-18.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

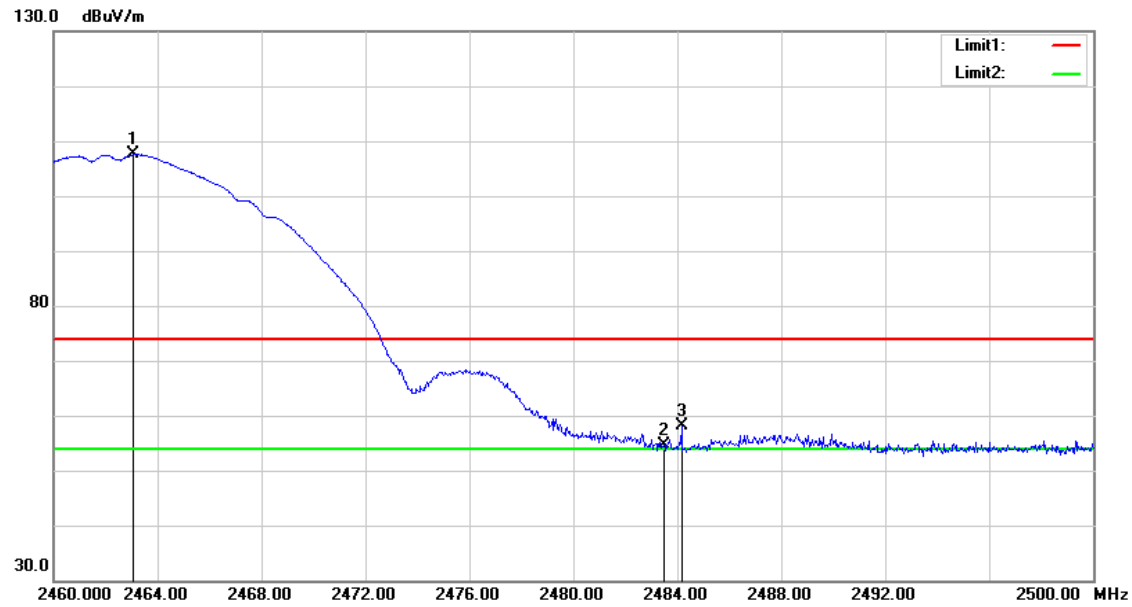


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.080	110.54	-2.93	107.61	--	--	peak
2	2483.500	57.52	-2.86	54.66	74.00	-19.34	peak
3	2484.160	60.86	-2.85	58.01	74.00	-15.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

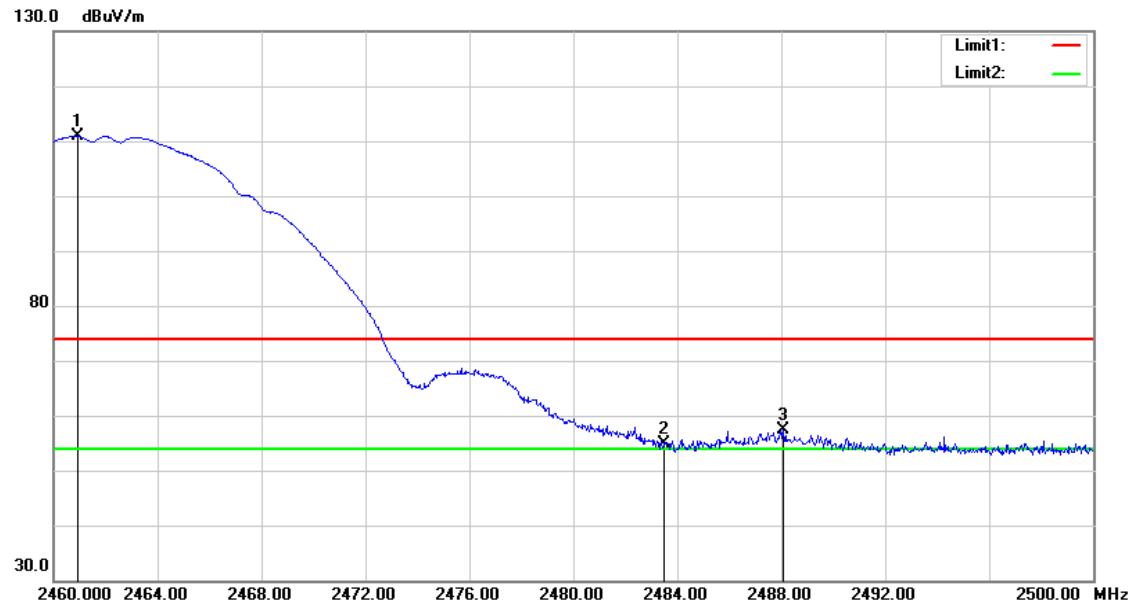


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.920	113.88	-2.94	110.94	--	--	peak
2	2483.500	57.86	-2.86	55.00	74.00	-19.00	peak
3	2488.080	60.15	-2.84	57.31	74.00	-16.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

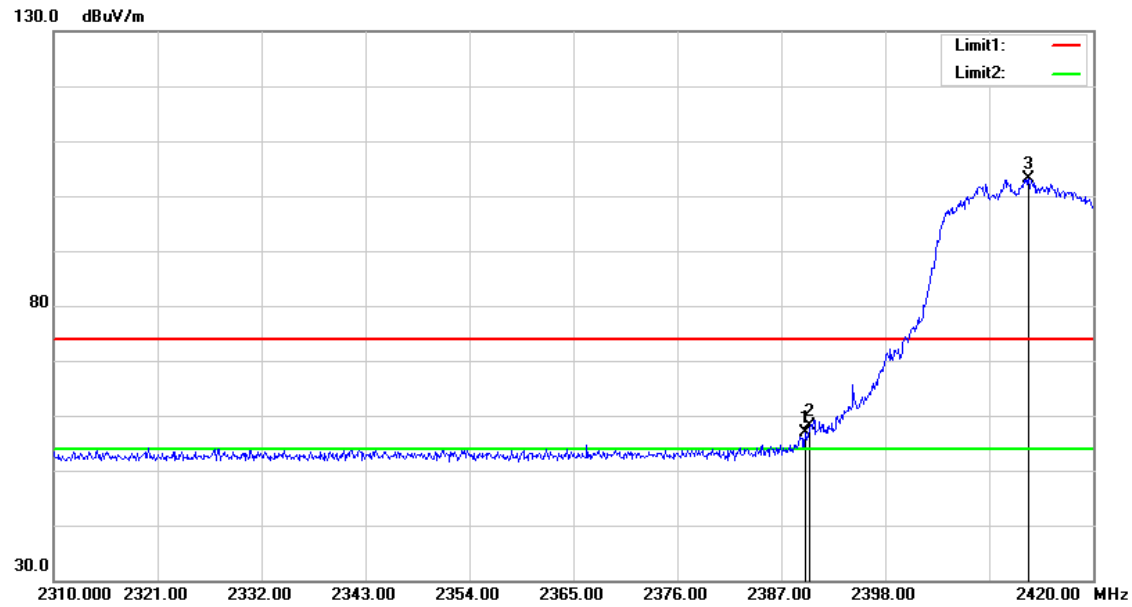


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	59.96	-3.19	56.77	74.00	-17.23	peak
2	2390.000	61.31	-3.19	58.12	74.00	-15.88	peak
3	2413.180	106.17	-3.10	103.07	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

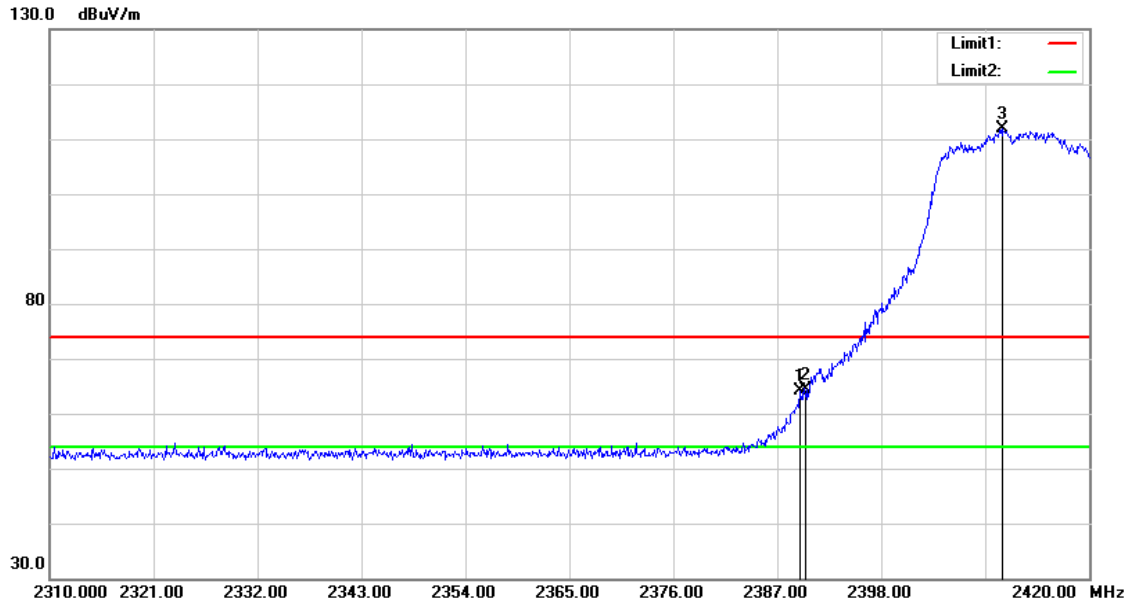


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	67.22	-3.19	64.03	74.00	-9.97	peak
2	2390.000	67.55	-3.19	64.36	74.00	-9.64	peak
3	2410.870	115.06	-3.12	111.94	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

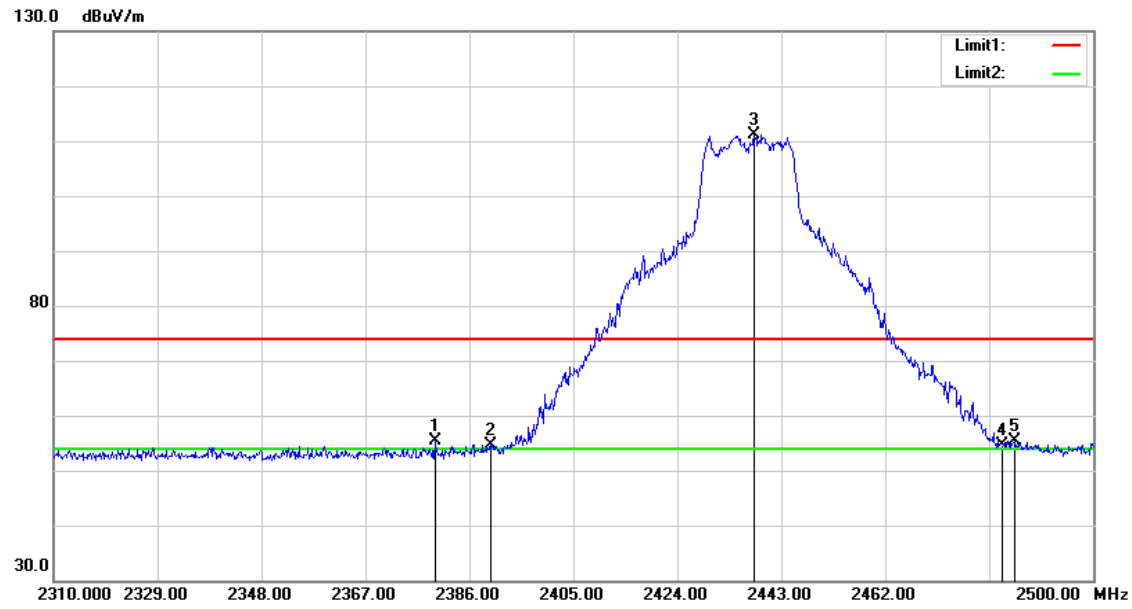


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.730	58.62	-3.23	55.39	74.00	-18.61	peak
2	2390.000	57.82	-3.19	54.63	74.00	-19.37	peak
3	2438.060	114.06	-3.02	111.04	--	--	peak
4	2483.500	57.53	-2.86	54.67	74.00	-19.33	peak
5	2485.750	58.22	-2.85	55.37	74.00	-18.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

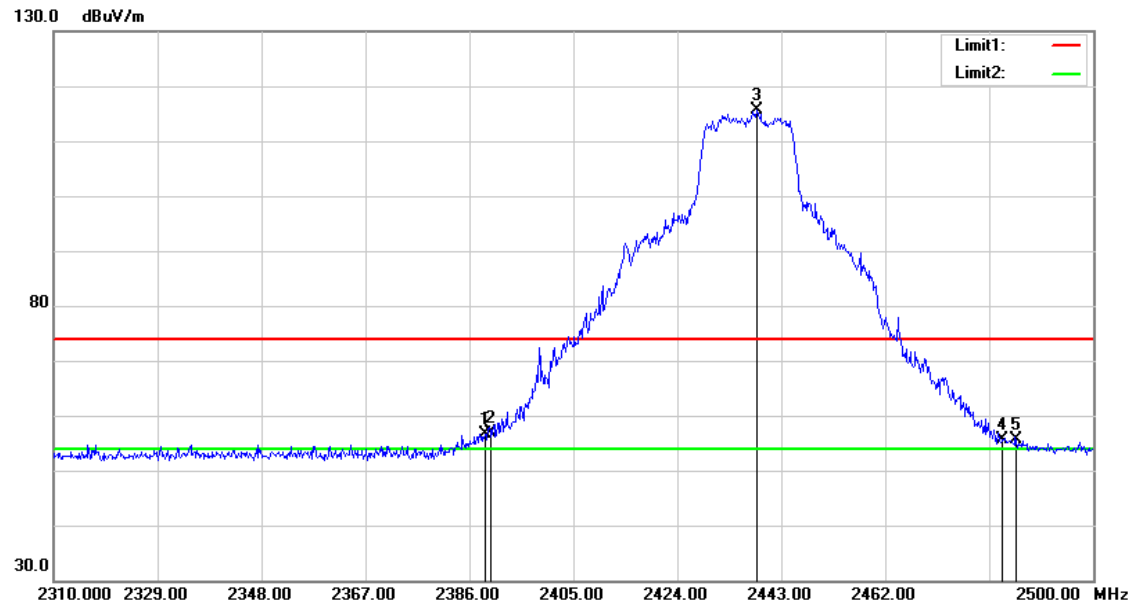


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	59.87	-3.19	56.68	74.00	-17.32	peak
2	2390.000	60.04	-3.19	56.85	74.00	-17.15	peak
3	2438.440	118.54	-3.02	115.52	--	--	peak
4	2483.500	58.47	-2.86	55.61	74.00	-18.39	peak
5	2485.940	58.57	-2.85	55.72	74.00	-18.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

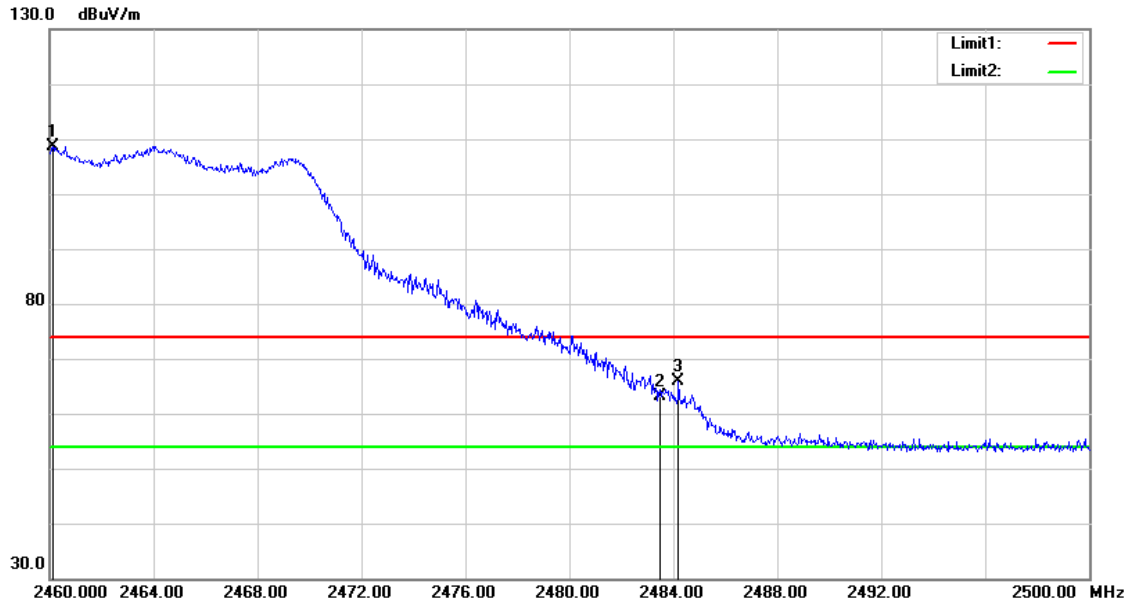


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.120	111.63	-2.94	108.69	--	--	peak
2	2483.500	65.96	-2.86	63.10	74.00	-10.90	peak
3	2484.200	68.70	-2.85	65.85	74.00	-8.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

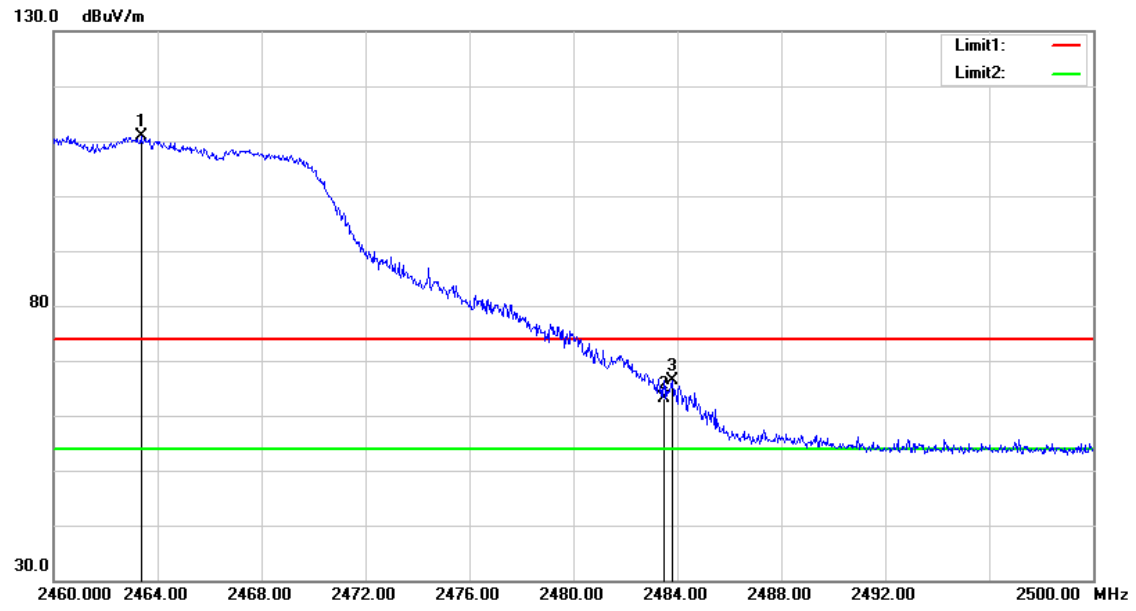


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.360	113.85	-2.93	110.92	--	--	peak
2	2483.500	65.93	-2.86	63.07	74.00	-10.93	peak
3	2483.800	69.17	-2.86	66.31	74.00	-7.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

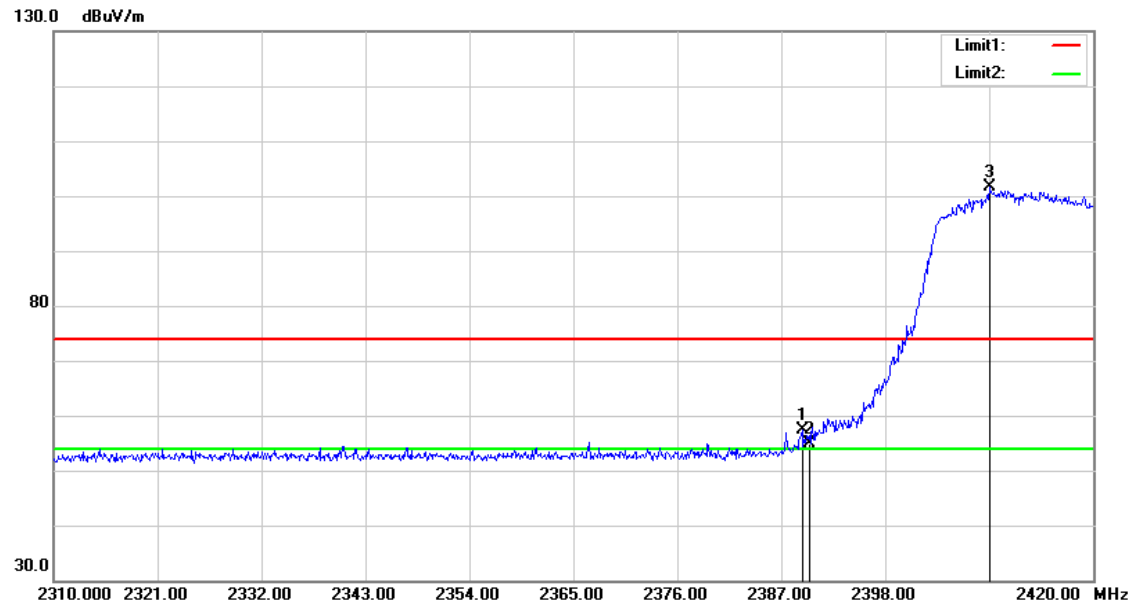


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	60.64	-3.19	57.45	74.00	-16.55	peak
2	2390.000	58.08	-3.19	54.89	74.00	-19.11	peak
3	2409.000	104.71	-3.12	101.59	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

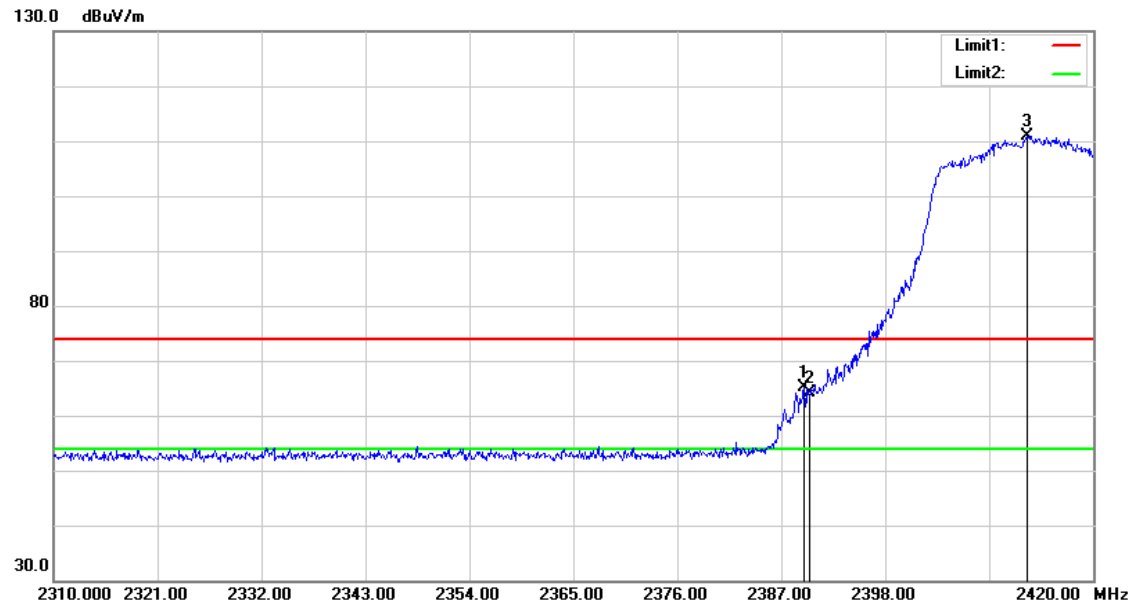


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	68.26	-3.19	65.07	74.00	-8.93	peak
2	2390.000	67.31	-3.19	64.12	74.00	-9.88	peak
3	2412.960	114.08	-3.10	110.98	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

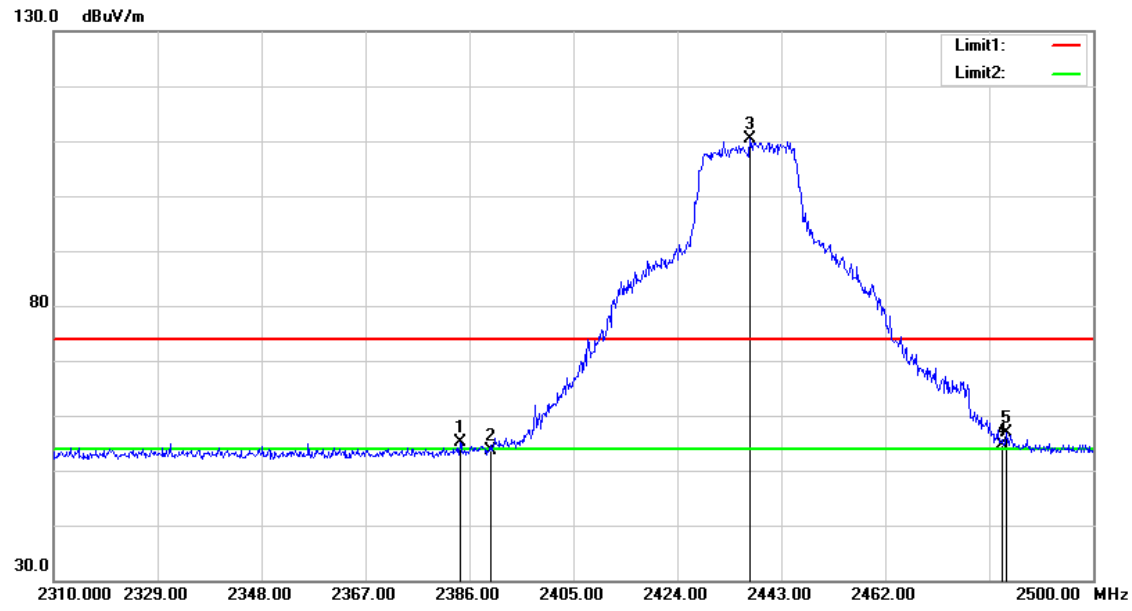


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.290	58.22	-3.21	55.01	74.00	-18.99	peak
2	2390.000	56.82	-3.19	53.63	74.00	-20.37	peak
3	2437.300	113.48	-3.03	110.45	--	--	peak
4	2483.500	57.52	-2.86	54.66	74.00	-19.34	peak
5	2484.230	59.65	-2.85	56.80	74.00	-17.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

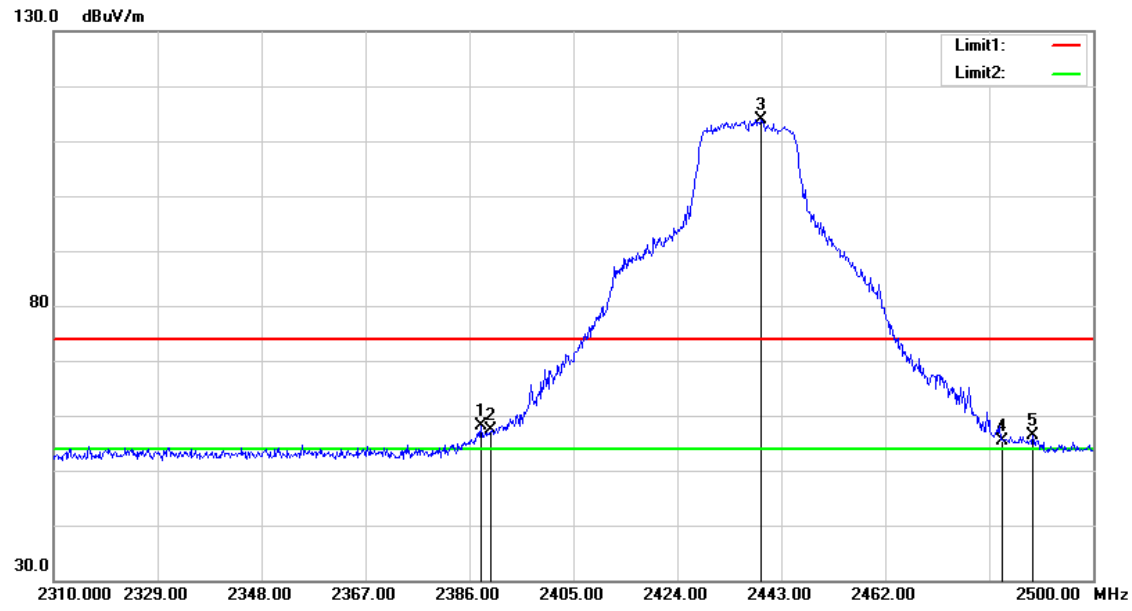


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	61.35	-3.19	58.16	74.00	-15.84	peak
2	2390.000	60.49	-3.19	57.30	74.00	-16.70	peak
3	2439.390	116.94	-3.01	113.93	--	--	peak
4	2483.500	58.36	-2.86	55.50	74.00	-18.50	peak
5	2488.980	59.10	-2.84	56.26	74.00	-17.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

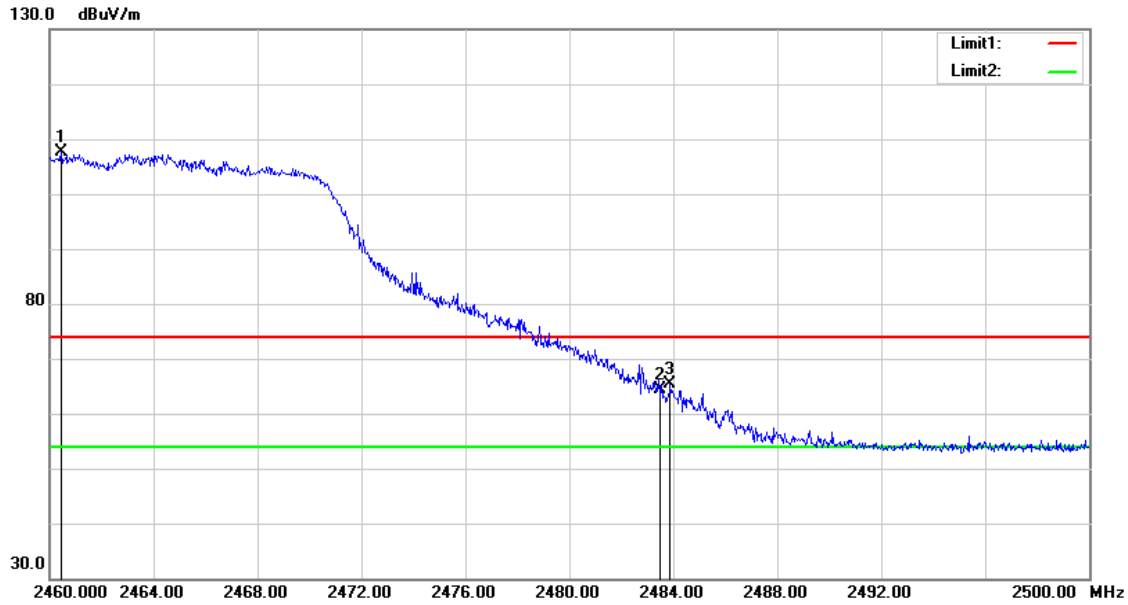


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.440	110.56	-2.94	107.62	--	--	peak
2	2483.500	67.21	-2.86	64.35	74.00	-9.65	peak
3	2483.880	68.20	-2.86	65.34	74.00	-8.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

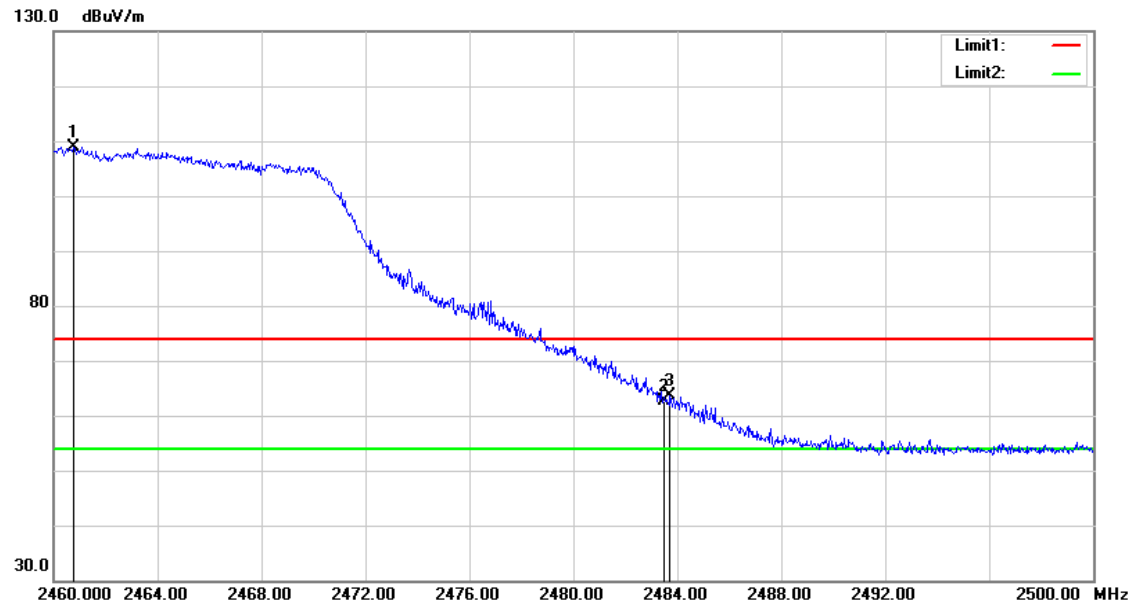


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.760	111.88	-2.94	108.94	--	--	peak
2	2483.500	65.49	-2.86	62.63	74.00	-11.37	peak
3	2483.720	66.52	-2.86	63.66	74.00	-10.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

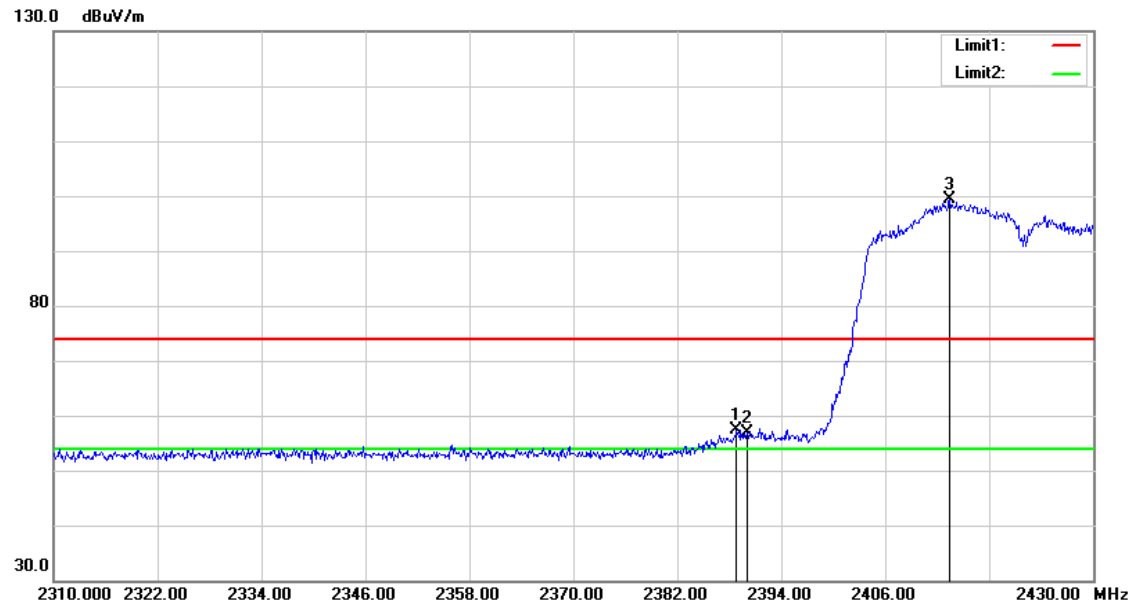


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.840	60.57	-3.19	57.38	74.00	-16.62	peak
2	2390.000	60.00	-3.19	56.81	74.00	-17.19	peak
3	2413.440	102.38	-3.10	99.28	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

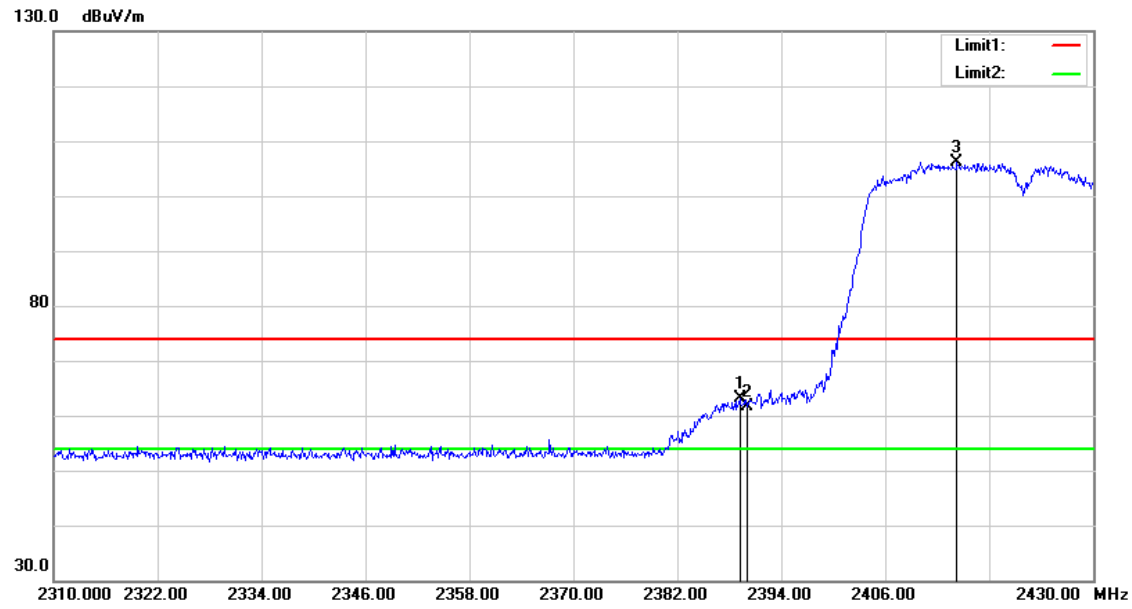


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	66.29	-3.19	63.10	74.00	-10.90	peak
2	2390.000	64.91	-3.19	61.72	74.00	-12.28	peak
3	2414.280	109.18	-3.10	106.08	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

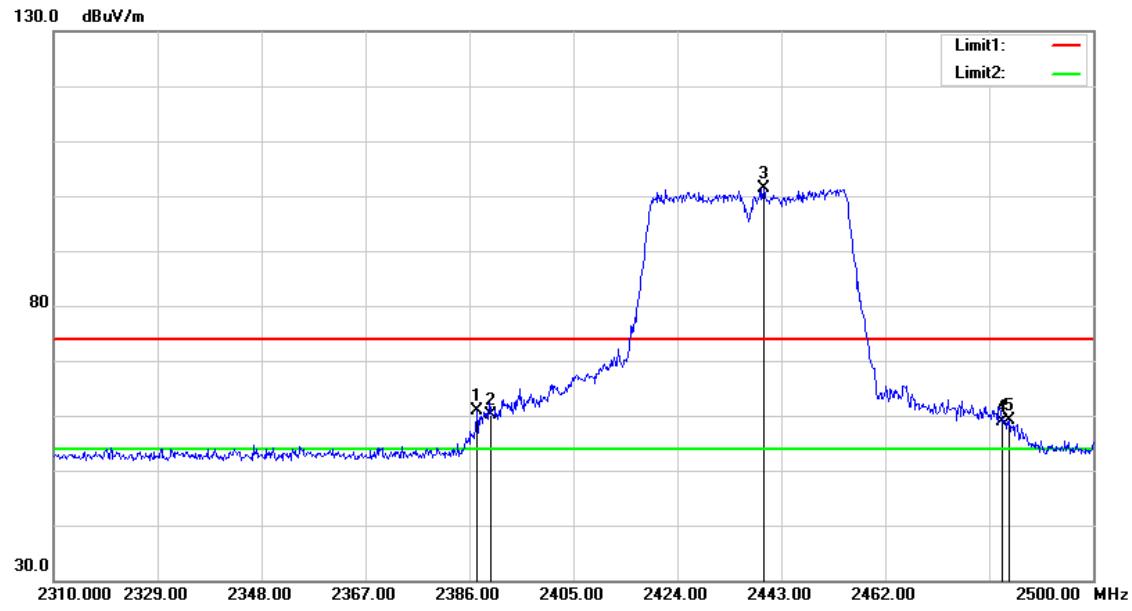


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.330	64.04	-3.20	60.84	74.00	-13.16	peak
2	2390.000	63.34	-3.19	60.15	74.00	-13.85	peak
3	2439.770	104.36	-3.01	101.35	--	--	peak
4	2483.500	61.77	-2.86	58.91	74.00	-15.09	peak
5	2484.610	61.99	-2.85	59.14	74.00	-14.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

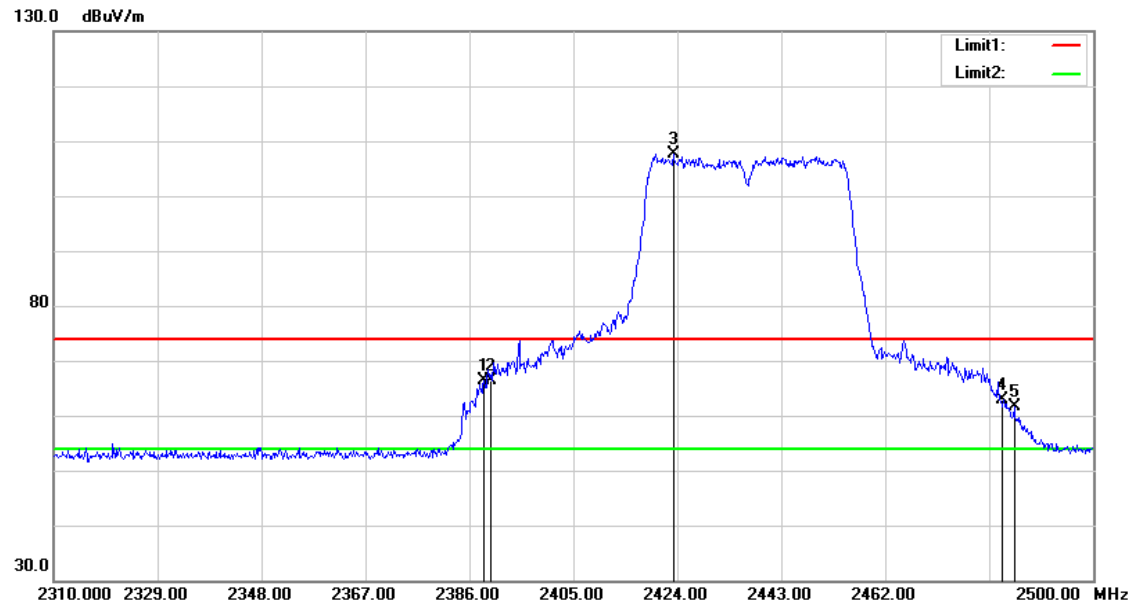


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.660	69.54	-3.19	66.35	74.00	-7.65	peak
2	2390.000	69.59	-3.19	66.40	74.00	-7.60	peak
3	2423.240	110.76	-3.07	107.69	--	--	peak
4	2483.500	65.72	-2.86	62.86	74.00	-11.14	peak
5	2485.560	64.37	-2.85	61.52	74.00	-12.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

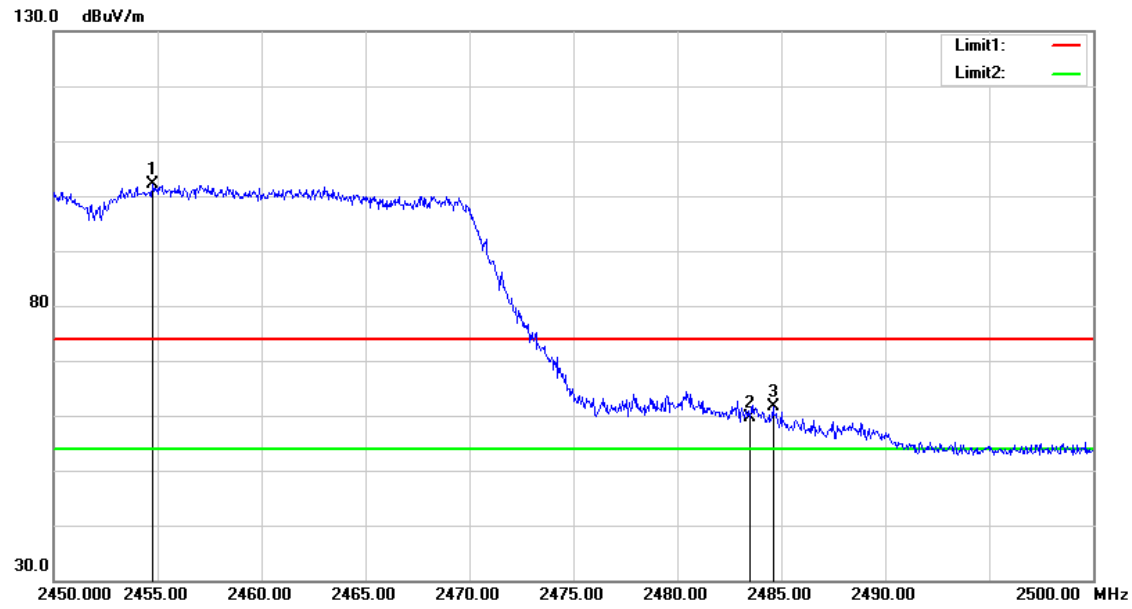


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.750	105.12	-2.96	102.16	--	--	peak
2	2483.500	62.60	-2.86	59.74	74.00	-14.26	peak
3	2484.600	64.47	-2.85	61.62	74.00	-12.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

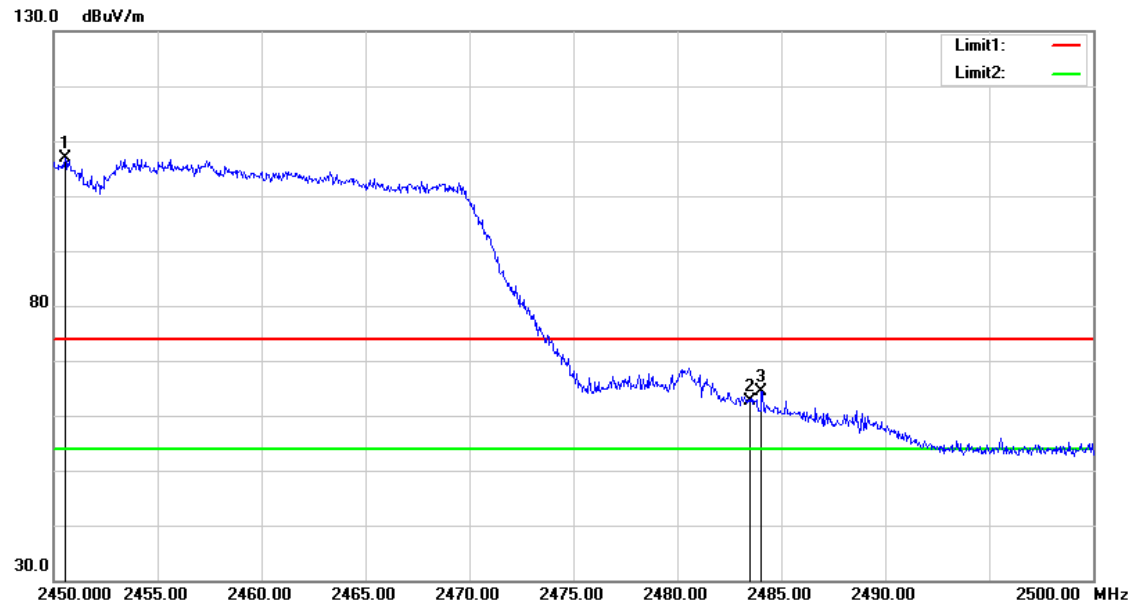

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.550	109.80	-2.98	106.82	--	--	peak
2	2483.500	65.37	-2.86	62.51	74.00	-11.49	peak
3	2484.050	67.26	-2.85	64.41	74.00	-9.59	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

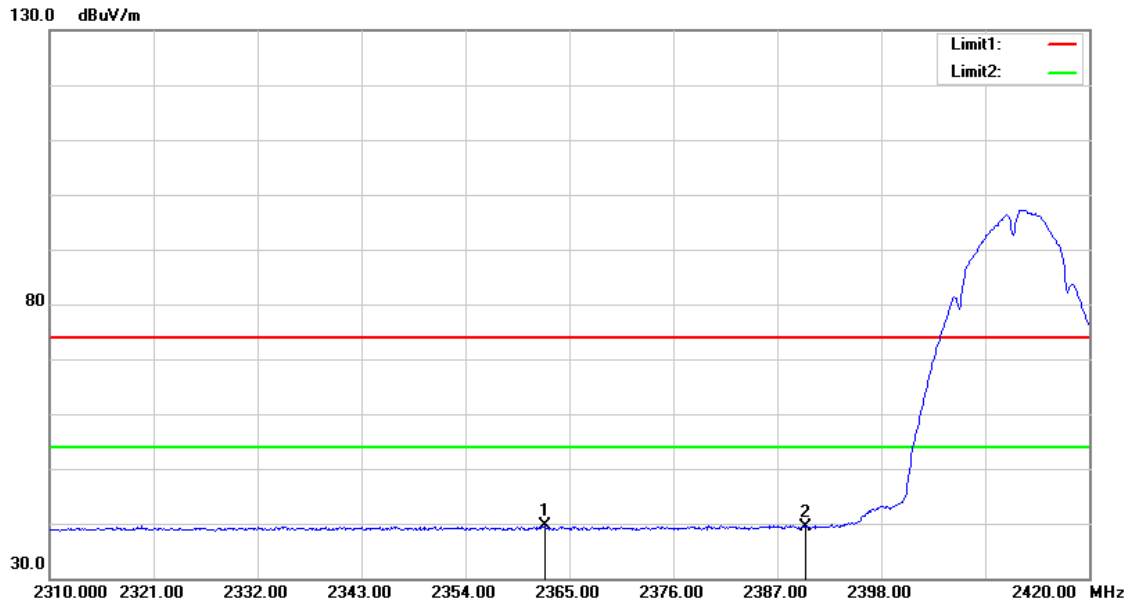


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.360	42.85	-3.29	39.56	54.00	-14.44	AVG
2	2390.000	42.65	-3.19	39.46	54.00	-14.54	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

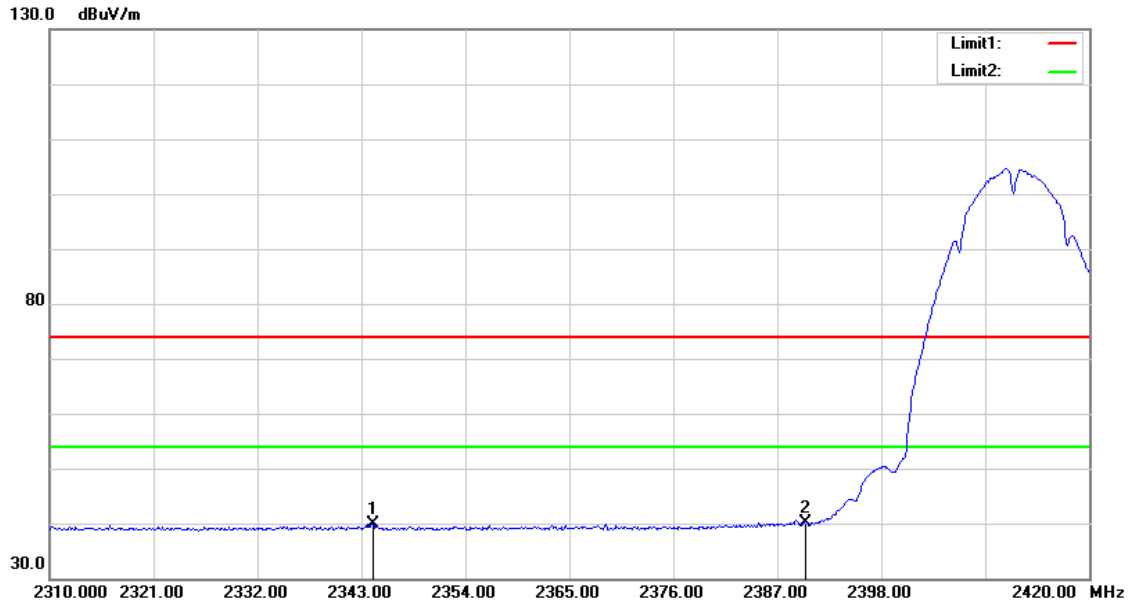


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2344.210	43.35	-3.35	40.00	54.00	-14.00	AVG
2	2390.000	43.38	-3.19	40.19	54.00	-13.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

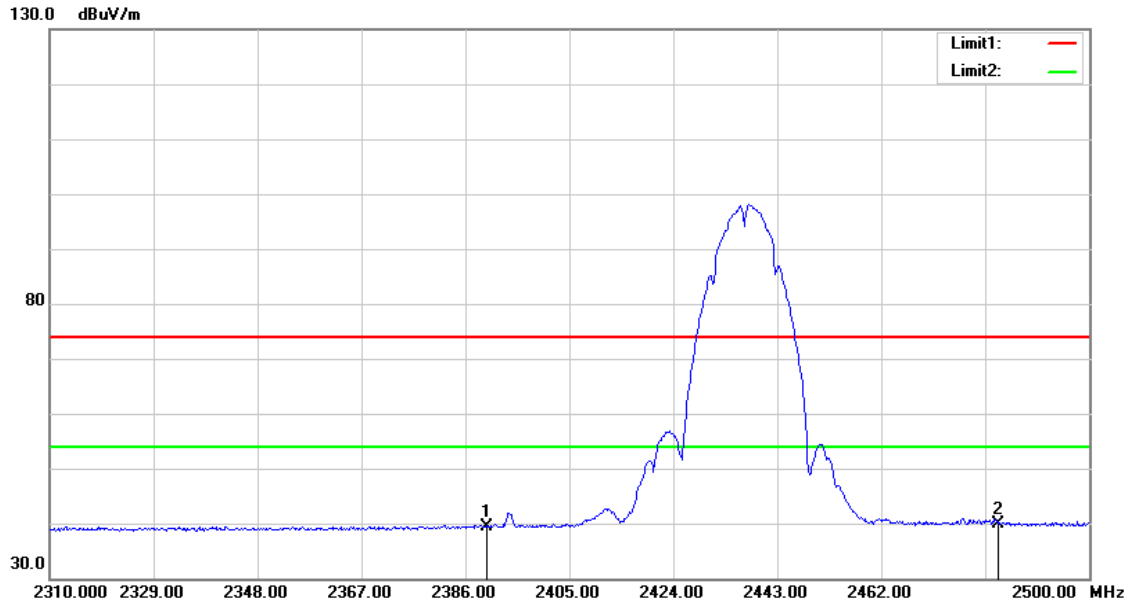


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	42.50	-3.19	39.31	54.00	-14.69	AVG
2	2483.500	42.86	-2.86	40.00	54.00	-14.00	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

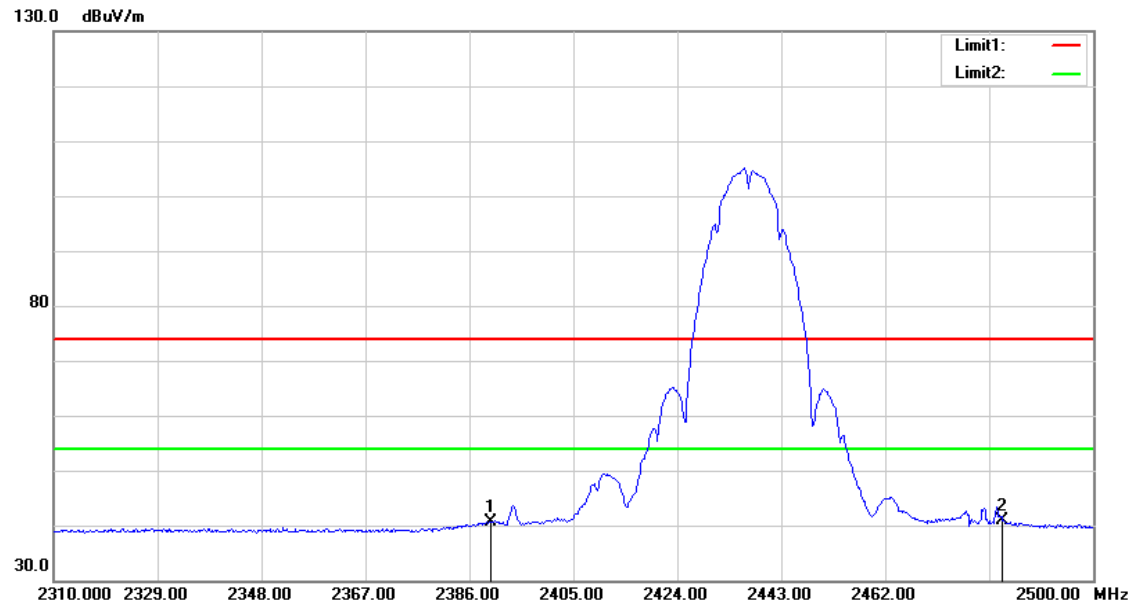


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	43.93	-3.19	40.74	54.00	-13.26	AVG
2	2483.500	43.75	-2.86	40.89	54.00	-13.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

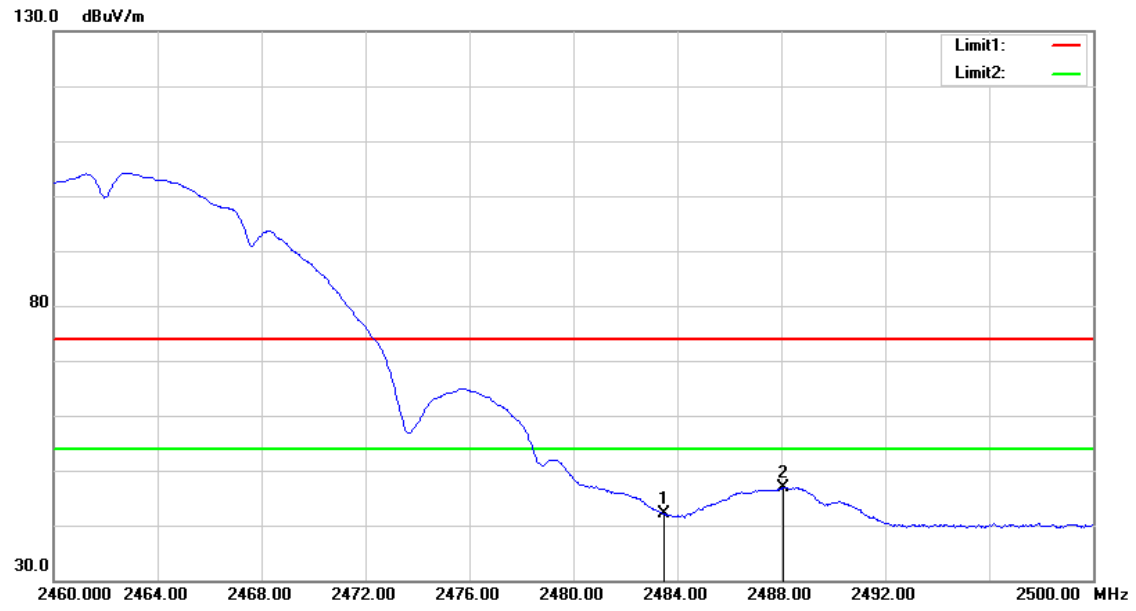


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.04	-2.86	42.18	54.00	-11.82	AVG
2	2488.080	49.78	-2.84	46.94	54.00	-7.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

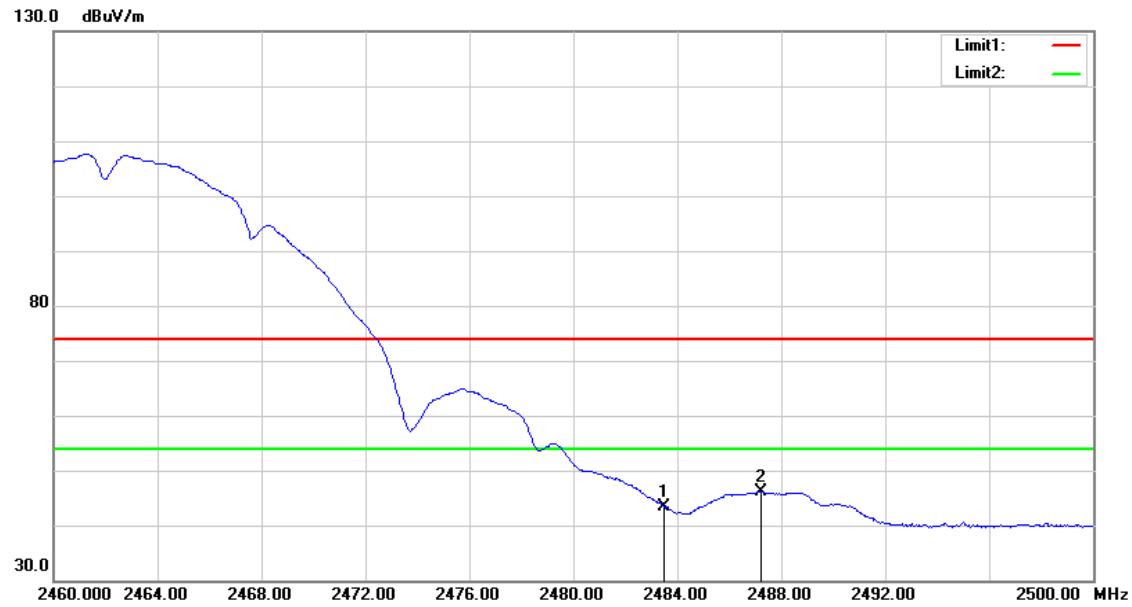


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.17	-2.86	43.31	54.00	-10.69	AVG
2	2487.240	49.01	-2.85	46.16	54.00	-7.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

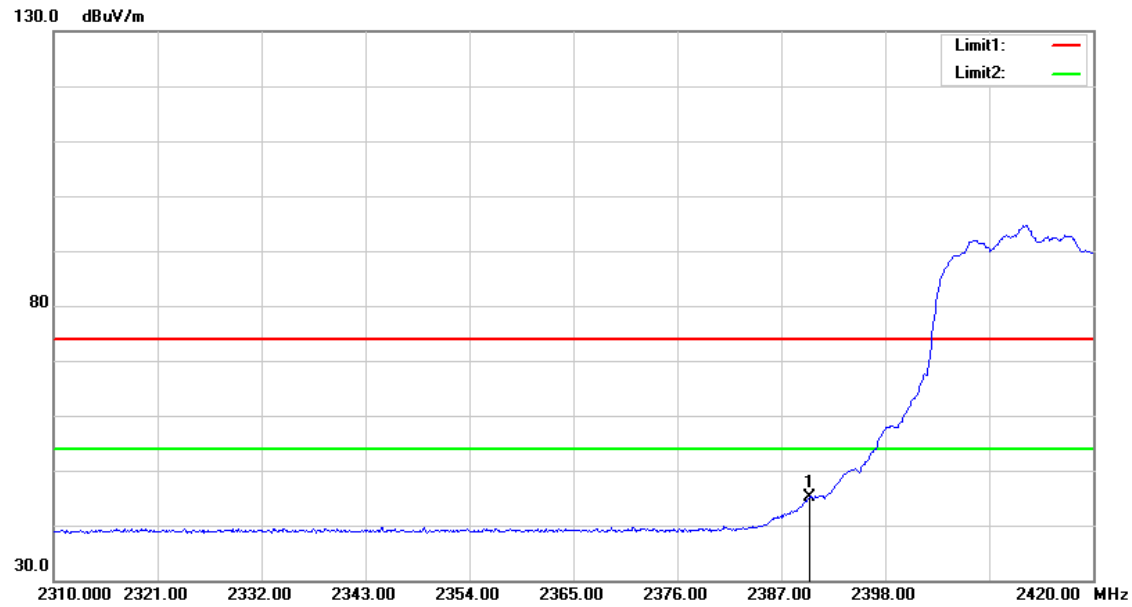


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	48.44	-3.19	45.25	54.00	-8.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

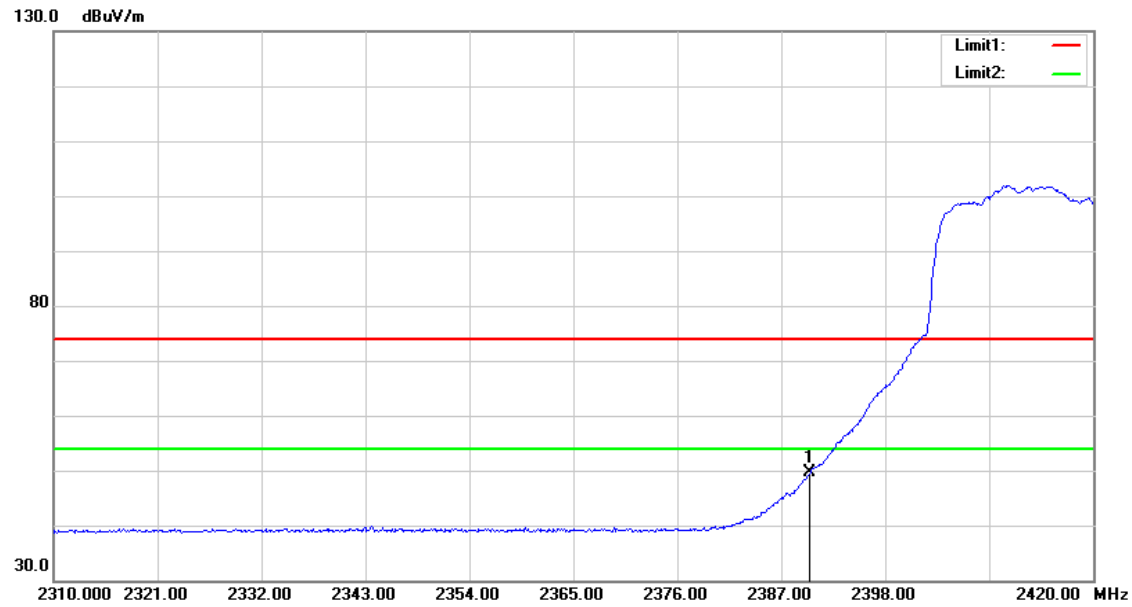


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	52.74	-3.19	49.55	54.00	-4.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

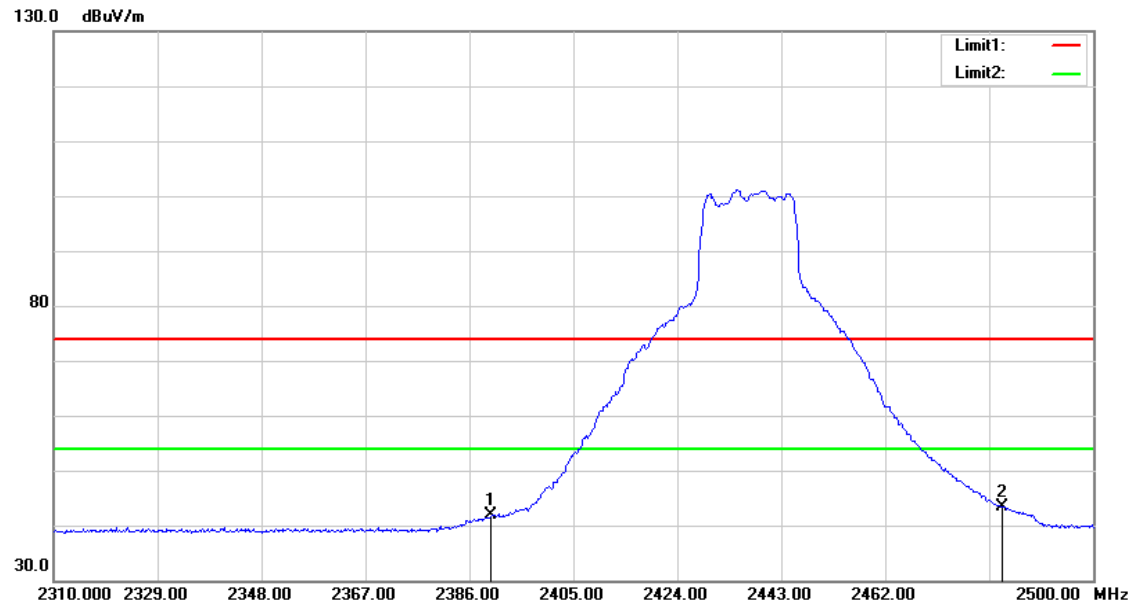


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	44.96	-3.19	41.77	54.00	-12.23	AVG
2	2483.500	46.31	-2.86	43.45	54.00	-10.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

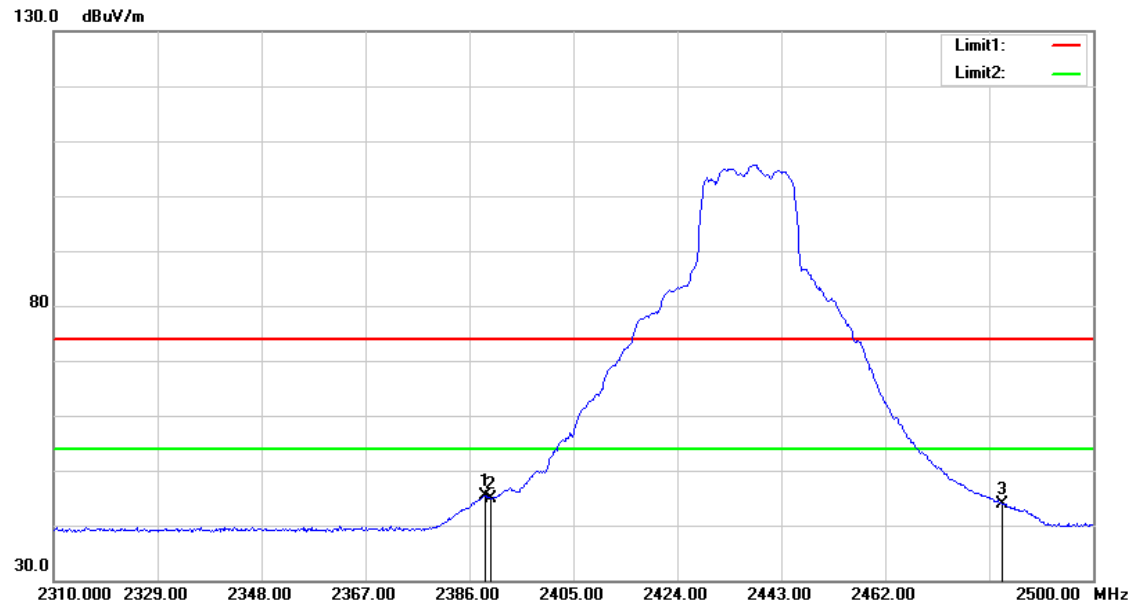


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	48.54	-3.19	45.35	54.00	-8.65	AVG
2	2390.000	48.17	-3.19	44.98	54.00	-9.02	AVG
3	2483.500	46.66	-2.86	43.80	54.00	-10.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

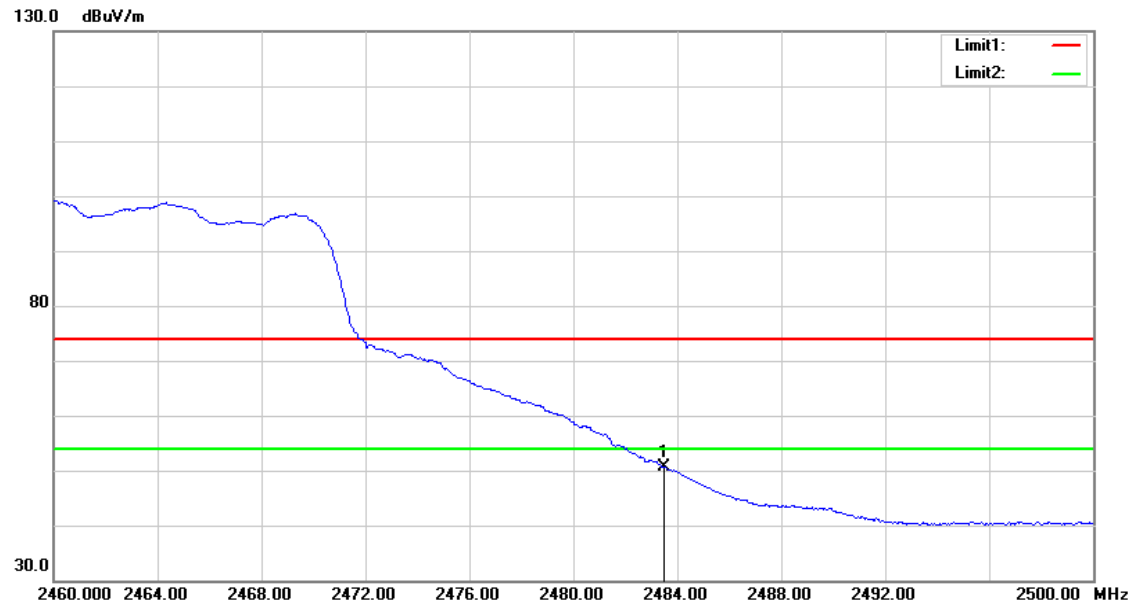


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.61	-2.86	50.75	54.00	-3.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

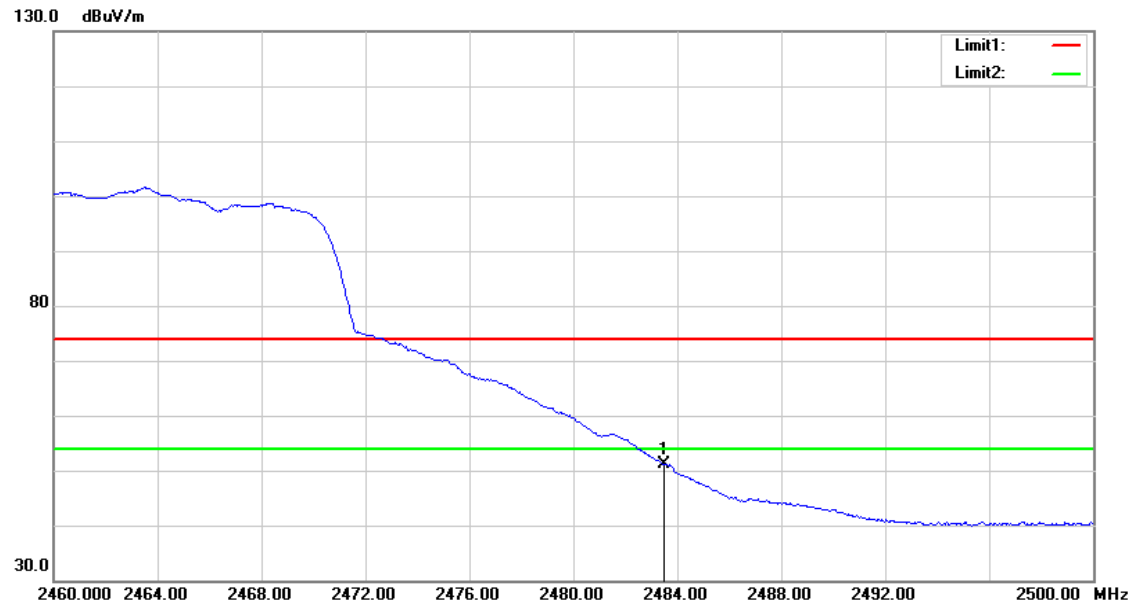


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.96	-2.86	51.10	54.00	-2.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

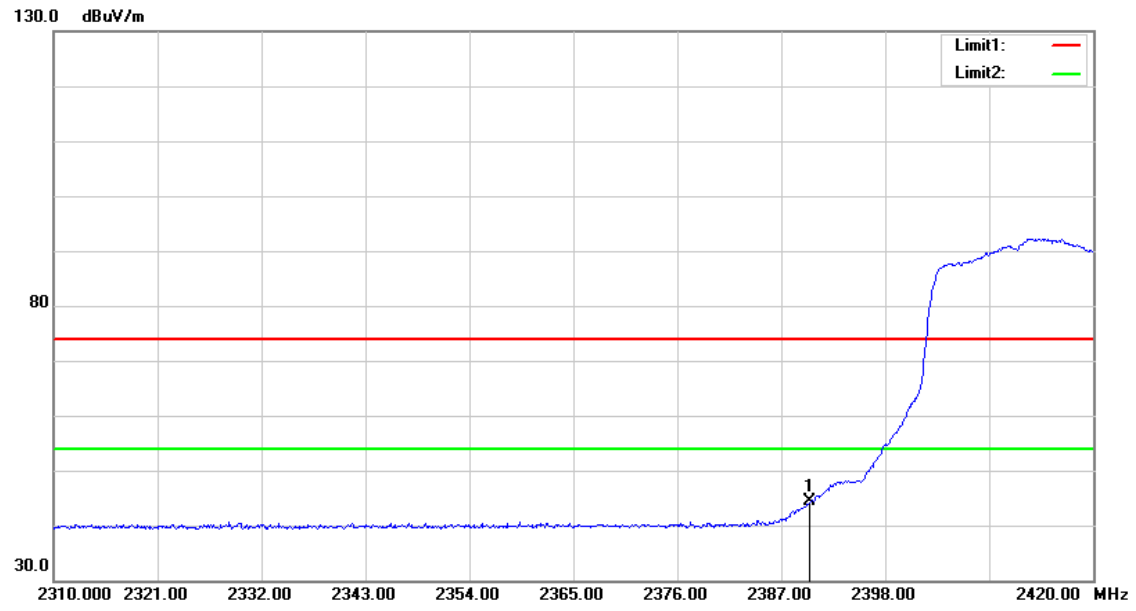


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	47.50	-3.19	44.31	54.00	-9.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

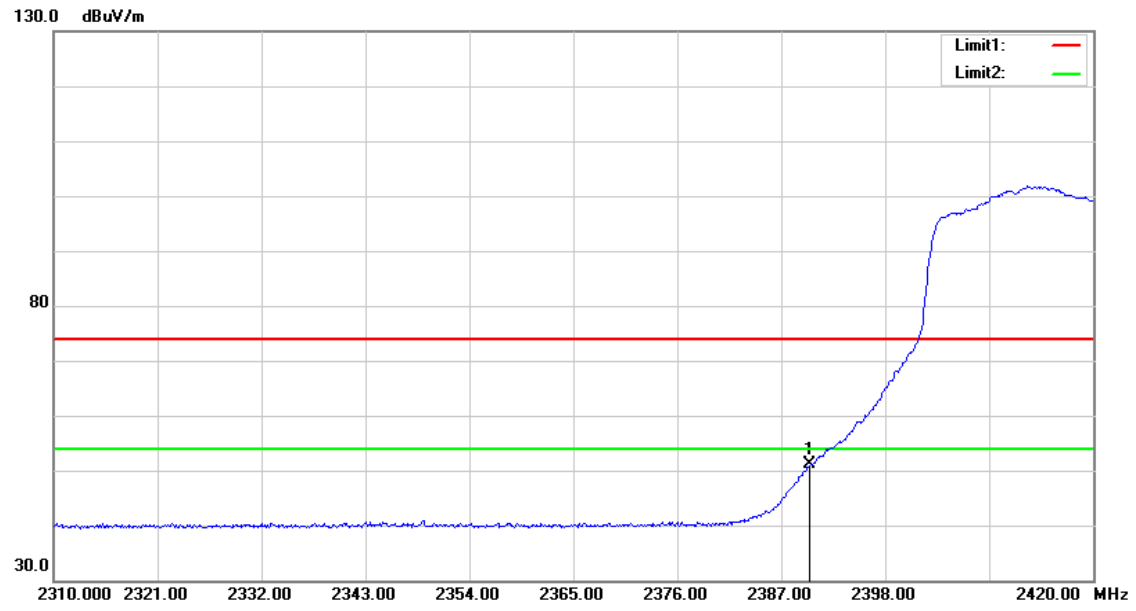


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	54.25	-3.19	51.06	54.00	-2.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

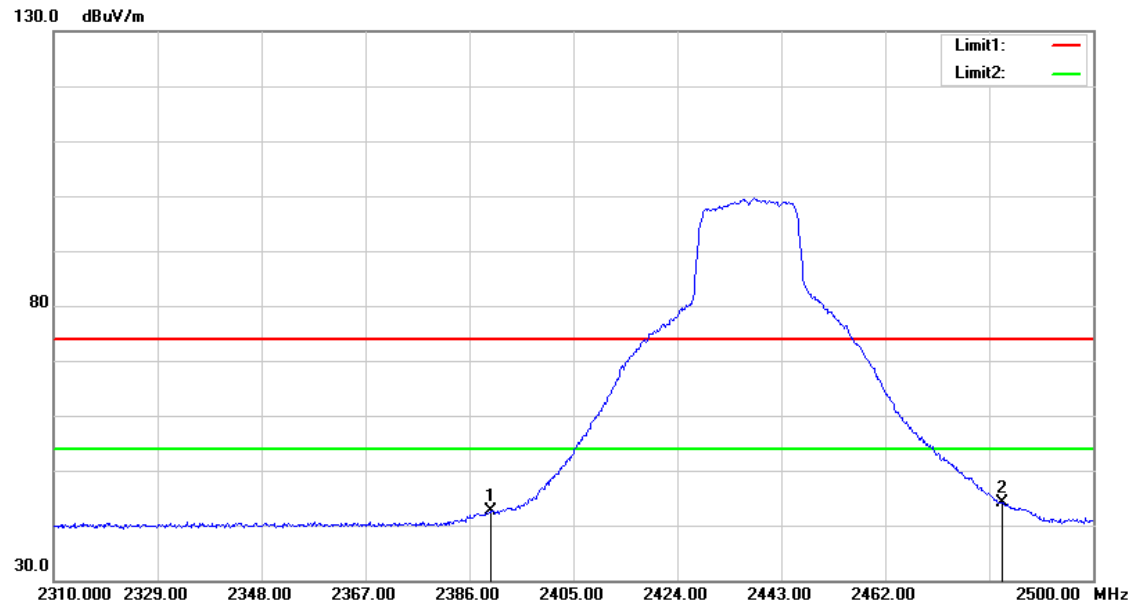


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	45.82	-3.19	42.63	54.00	-11.37	AVG
2	2483.500	47.06	-2.86	44.20	54.00	-9.80	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

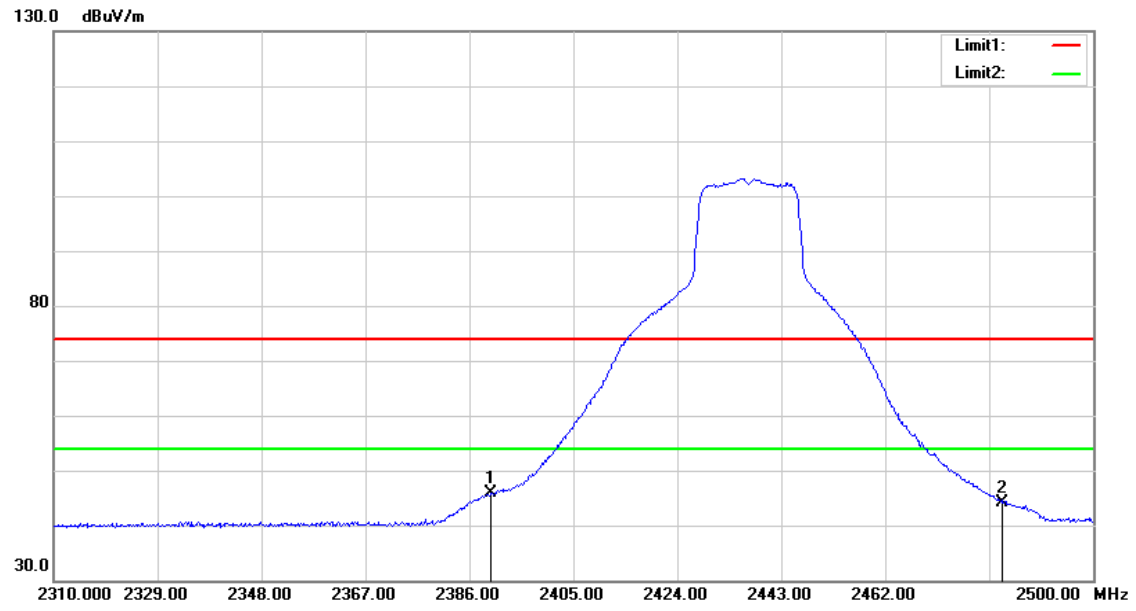


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	49.12	-3.19	45.93	54.00	-8.07	AVG
2	2483.500	46.94	-2.86	44.08	54.00	-9.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

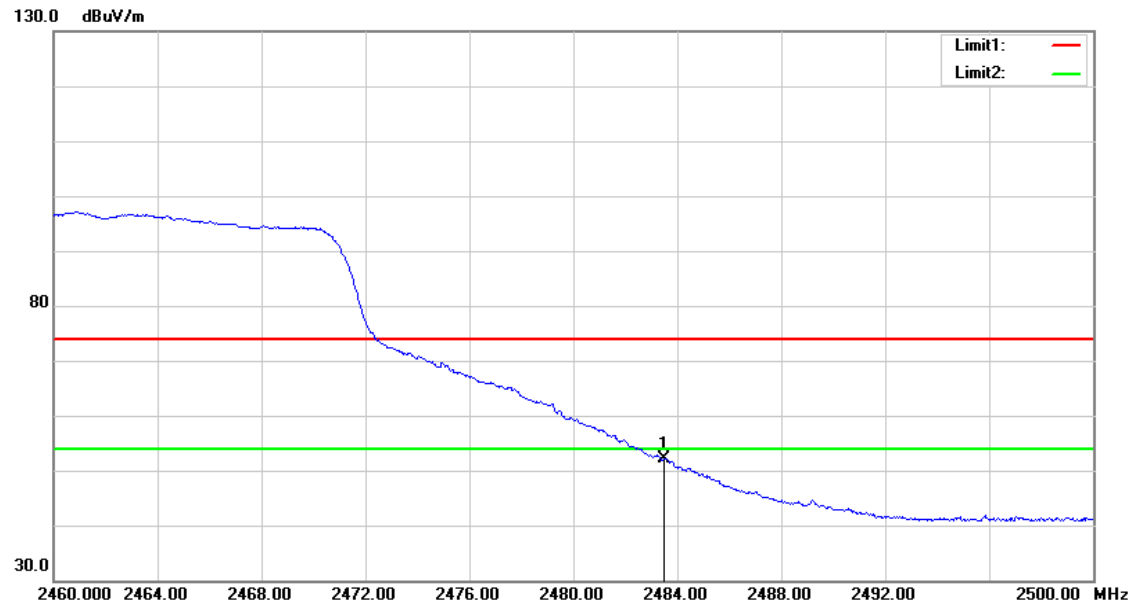


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.02	-2.86	52.16	54.00	-1.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

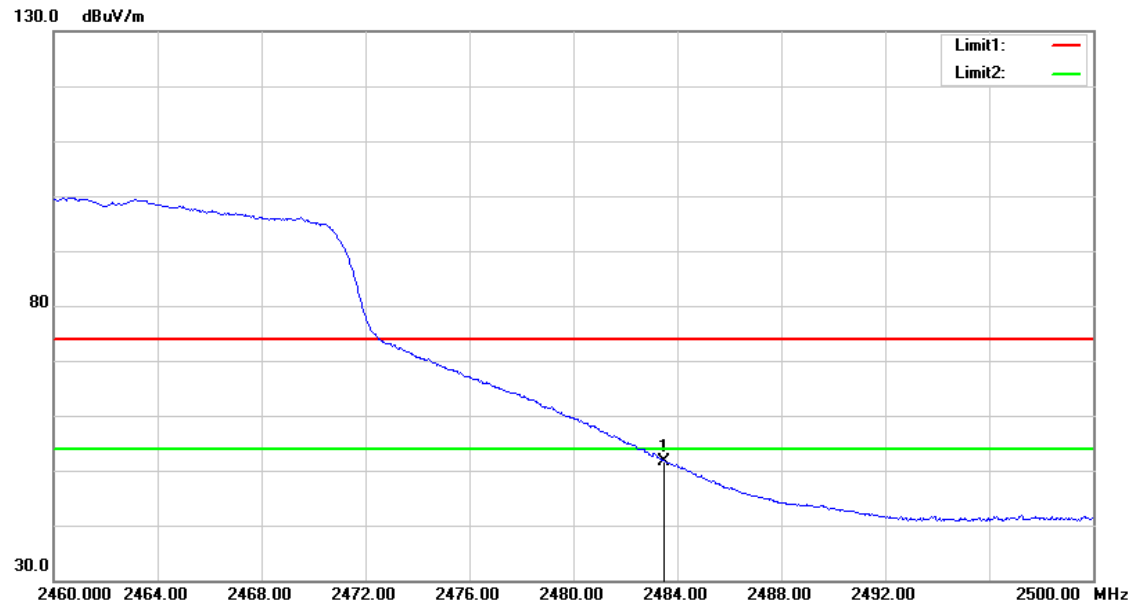


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.61	-2.86	51.75	54.00	-2.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

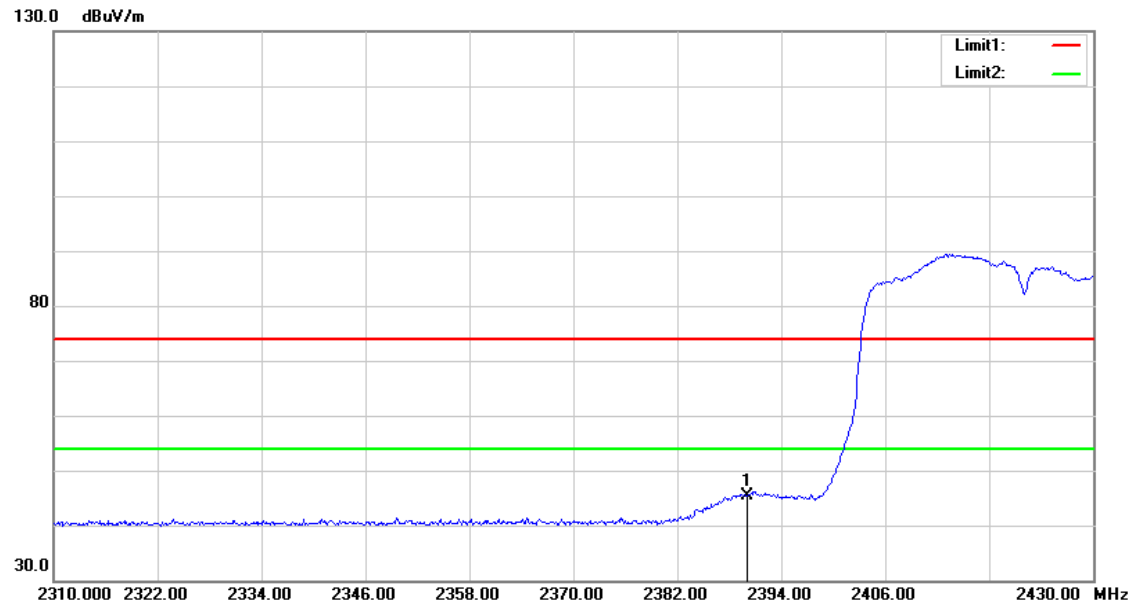


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	48.51	-3.19	45.32	54.00	-8.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

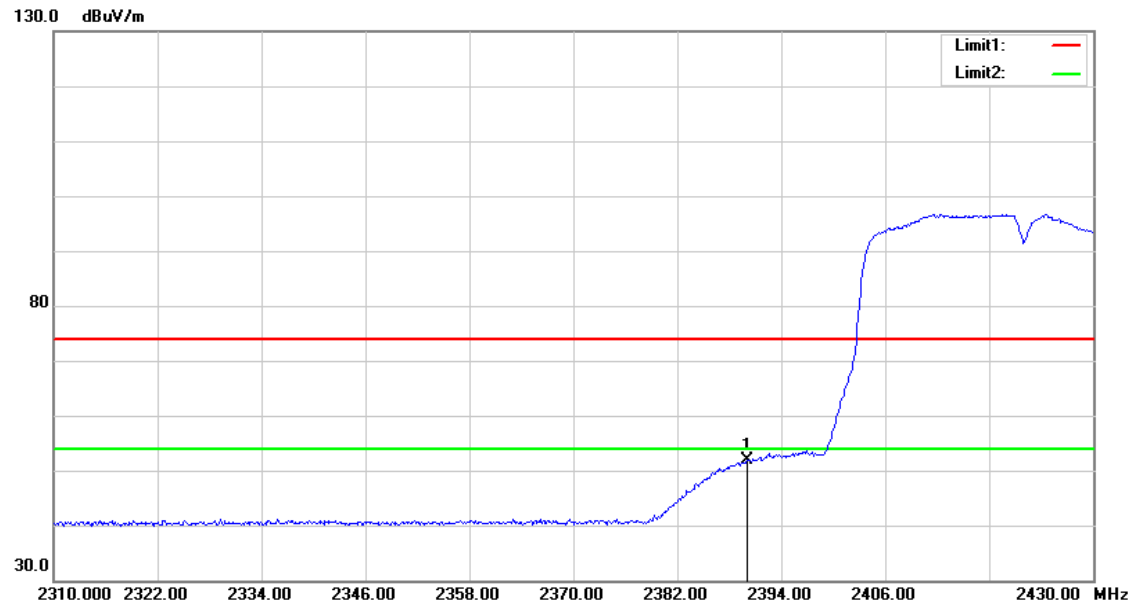


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	55.05	-3.19	51.86	54.00	-2.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

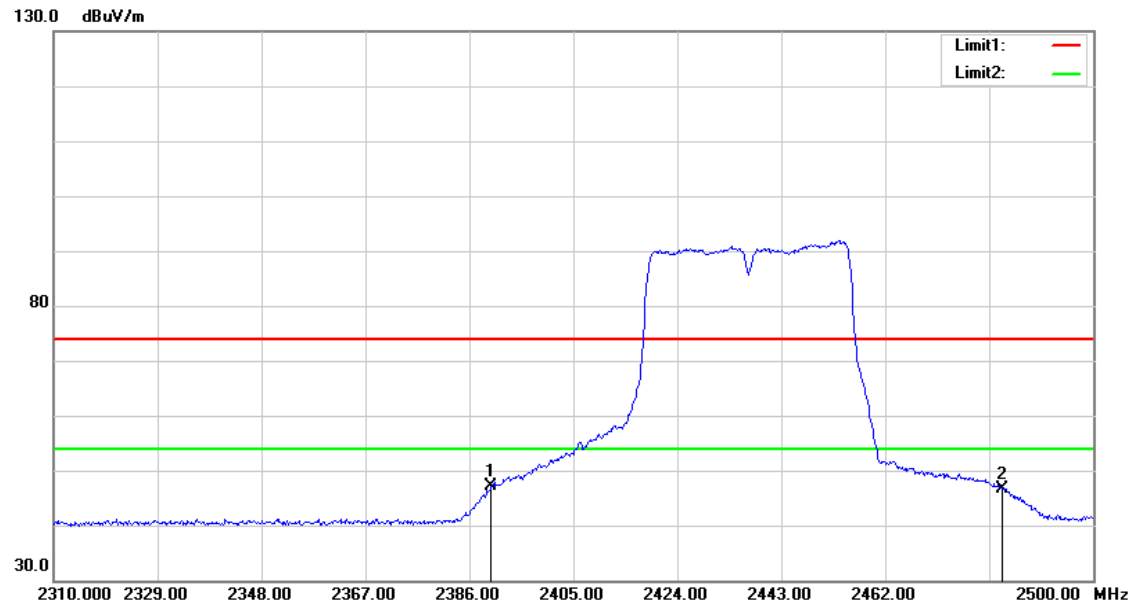


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	50.32	-3.19	47.13	54.00	-6.87	AVG
2	2483.500	49.47	-2.86	46.61	54.00	-7.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

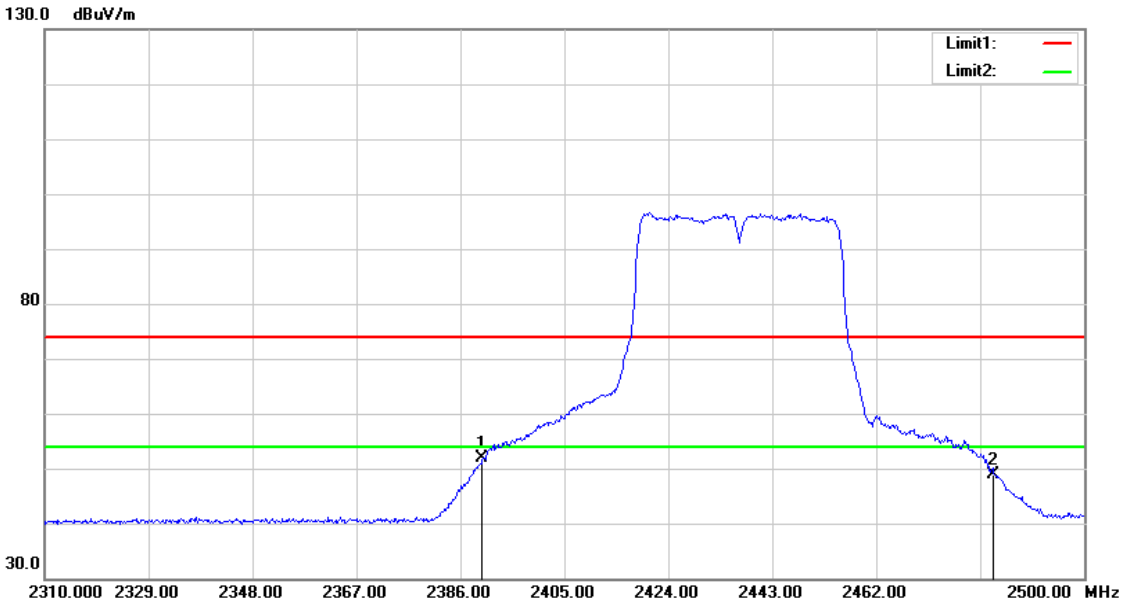


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	55.09	-3.19	51.90	54.00	-2.10	AVG
2	2483.500	51.75	-2.86	48.89	54.00	-5.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

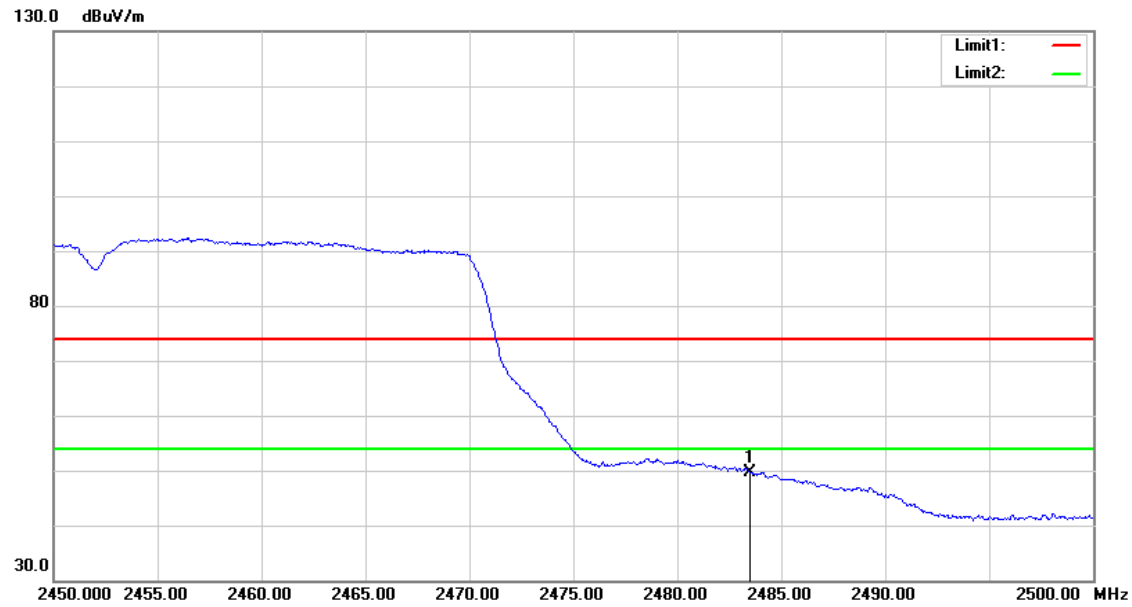


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.42	-2.86	49.56	54.00	-4.44	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

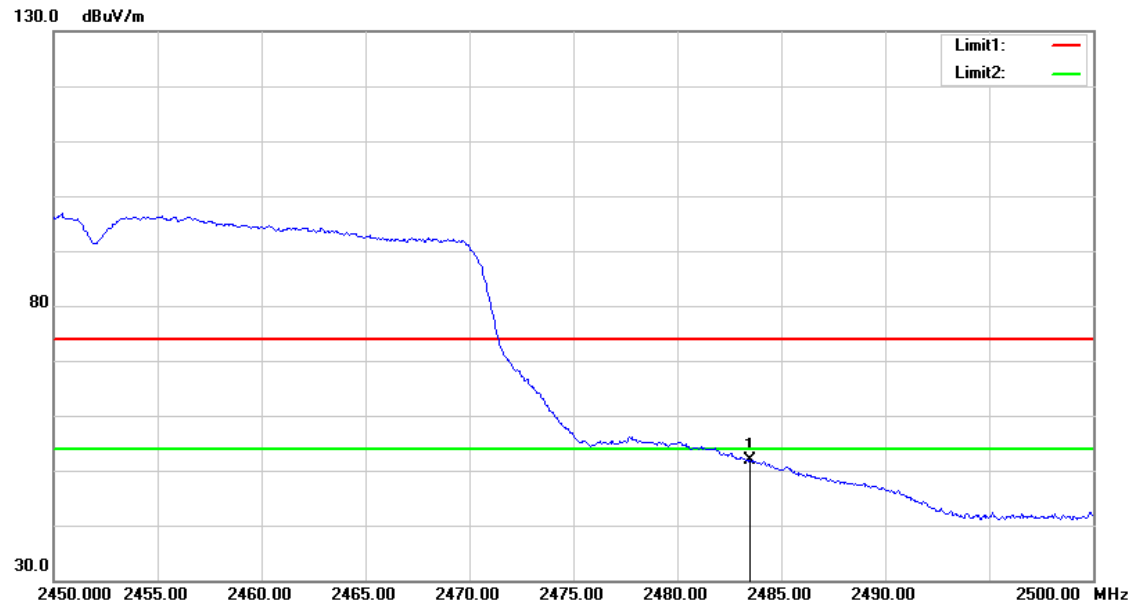

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.82	-2.86	51.96	54.00	-2.04	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex C. Conducted Test Results (2.4 GHz)




Maximum Conducted Output Power




操作模式	Data Rate (Mbps)	頻道 CH	峰值傳導輸出功率				Limit (dBm)
			(Average)		(Peak)		
			ANT 1		ANT 1		
			dBm	W	dBm	W	
Mode 1	1	01	10.51	0.011	13.08	0.020	≤ 30.00
		06	13.86	0.024	16.14	0.041	≤ 30.00
		11	14.88	0.031	16.92	0.049	≤ 30.00
Mode 2	6	01	11.90	0.015	16.88	0.049	≤ 30.00
		06	15.15	0.033	19.13	0.082	≤ 30.00
		11	11.71	0.015	16.37	0.043	≤ 30.00
Mode 3	13	01	10.30	0.011	15.60	0.036	≤ 29.49
		06	14.61	0.029	18.73	0.075	≤ 29.49
		11	11.45	0.014	16.35	0.043	≤ 29.49
Mode 4	27	03	10.44	0.011	17.42	0.055	≤ 29.49
		06	12.42	0.017	18.63	0.073	≤ 29.49
		09	11.78	0.015	17.69	0.059	≤ 29.49




操作模式	Data Rate (Mbps)	頻道 CH	峰值傳導輸出功率				Limit (dBm)
			(Average)		(Peak)		
			ANT 2		ANT 2		
			dBm	W	dBm	W	
Mode 1	1	01	12.12	0.016	14.36	0.027	≤ 30.00
		06	15.35	0.034	17.55	0.057	≤ 30.00
		11	16.09	0.041	18.28	0.067	≤ 30.00
Mode 2	6	01	13.15	0.021	17.85	0.061	≤ 30.00
		06	16.64	0.046	20.30	0.107	≤ 30.00
		11	13.23	0.021	18.08	0.064	≤ 30.00
Mode 3	13	01	12.08	0.016	16.86	0.049	≤ 29.49
		06	16.01	0.040	20.08	0.102	≤ 29.49
		11	13.24	0.021	17.91	0.062	≤ 29.49
Mode 4	27	03	12.54	0.018	18.58	0.072	≤ 29.49
		06	14.10	0.026	20.12	0.103	≤ 29.49
		09	11.92	0.016	18.60	0.072	≤ 29.49




操作模式	Data Rate (Mbps)	頻道 CH	峰值傳導輸出功率				Limit (dBm)
			(Average)		(Peak)		
			ANT 1+2		ANT 1+2		
			dBm	W	dBm	W	
Mode 1	1	01	14.40	0.028	16.78	0.048	≤ 30.00
		06	17.68	0.059	19.91	0.098	≤ 30.00
		11	18.54	0.071	20.66	0.116	≤ 30.00
Mode 2	6	01	15.58	0.036	20.40	0.110	≤ 30.00
		06	18.97	0.079	22.76	0.189	≤ 30.00
		11	15.55	0.036	20.32	0.108	≤ 30.00
Mode 3	13	01	14.29	0.027	19.29	0.085	≤ 29.49
		06	18.38	0.069	22.47	0.177	≤ 29.49
		11	15.45	0.035	20.21	0.105	≤ 29.49
Mode 4	27	03	14.63	0.029	21.05	0.127	≤ 29.49
		06	16.35	0.043	22.45	0.176	≤ 29.49
		09	14.86	0.031	21.18	0.131	≤ 29.49



Out of Band Conducted Spurious Emission

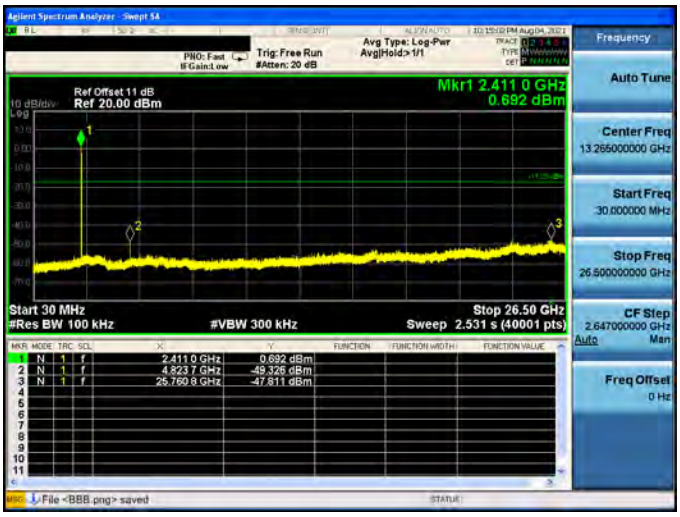
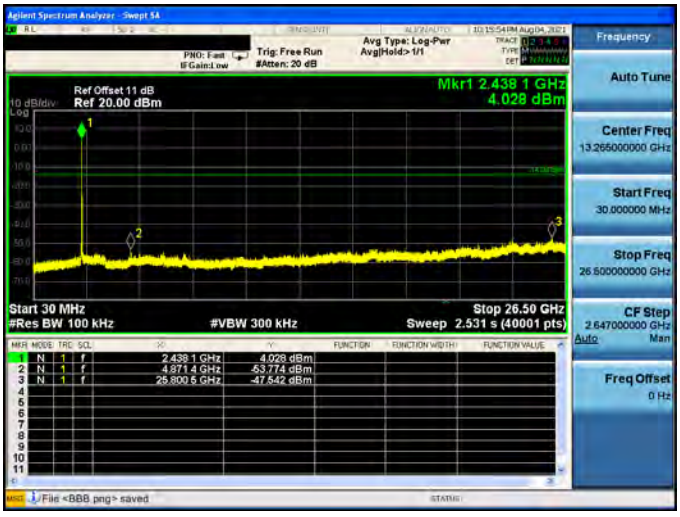
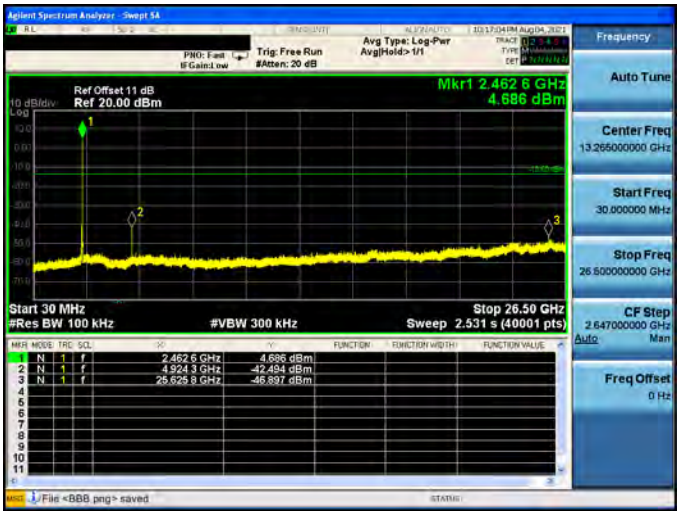
Mode 1: IEEE 802.11b Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

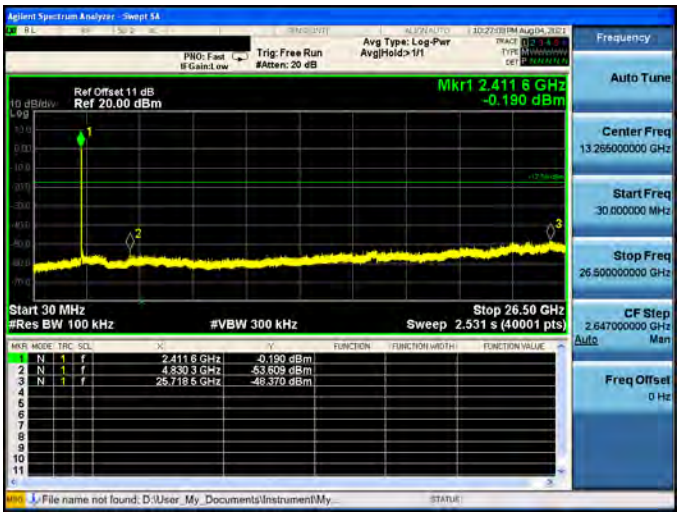
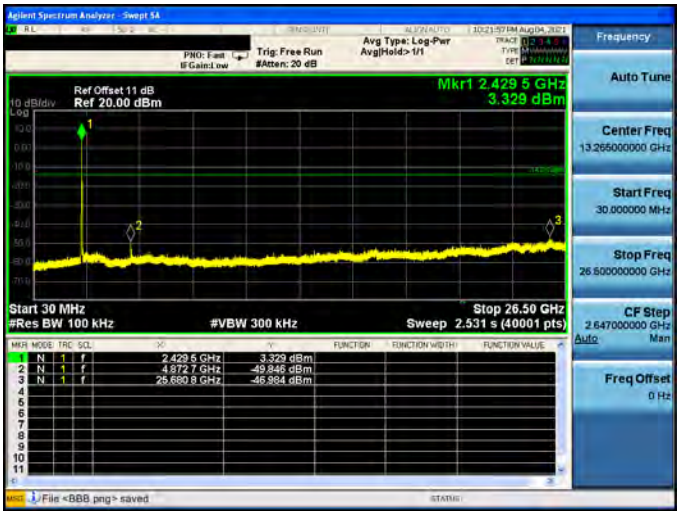
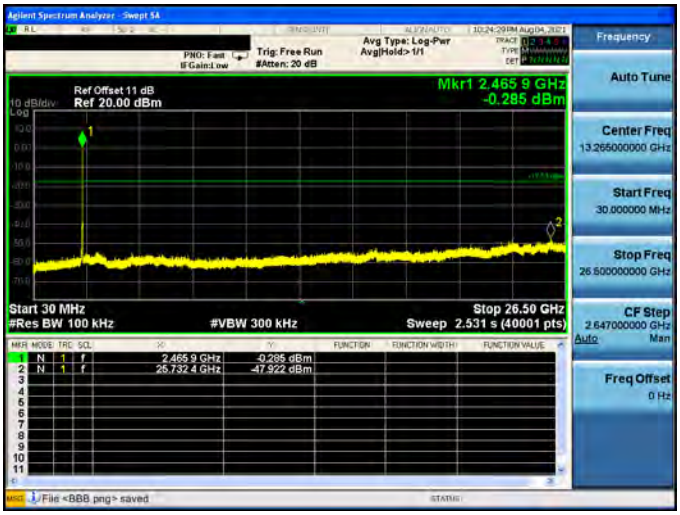
Mode 2: IEEE 802.11g Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

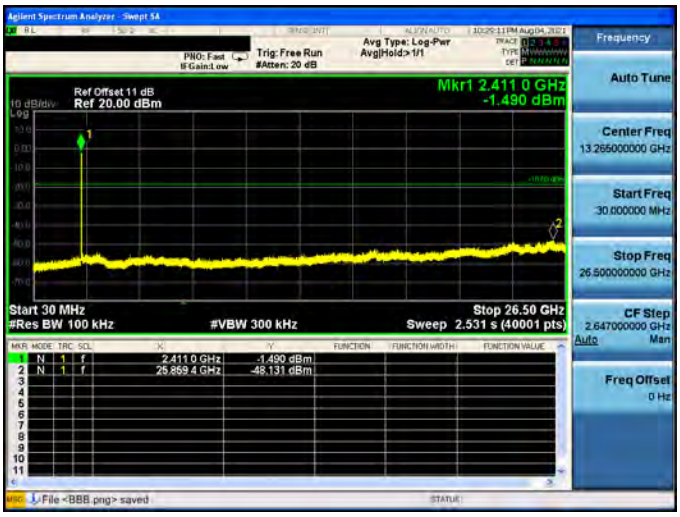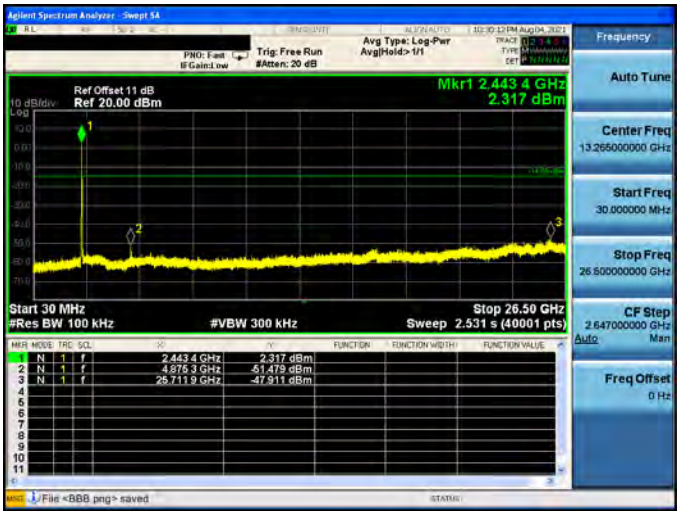
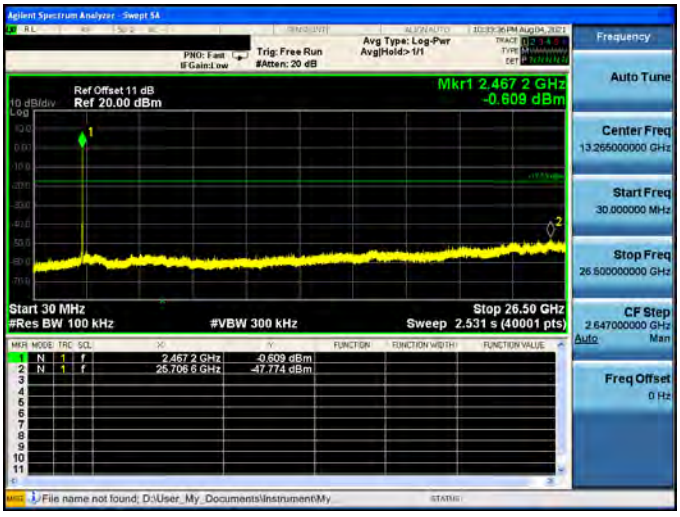
Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

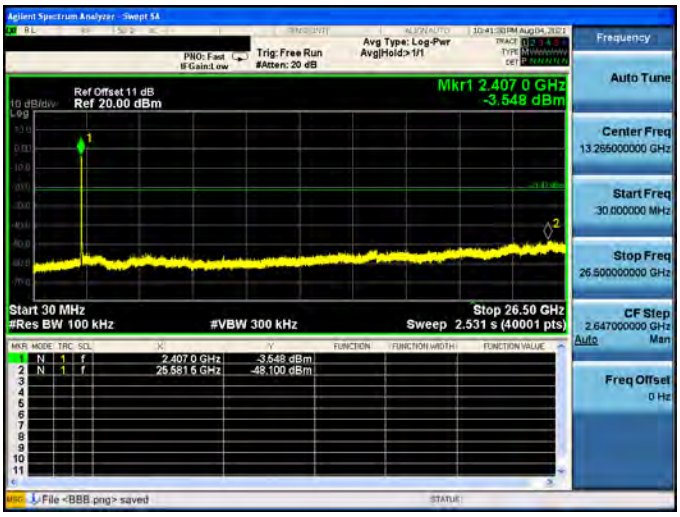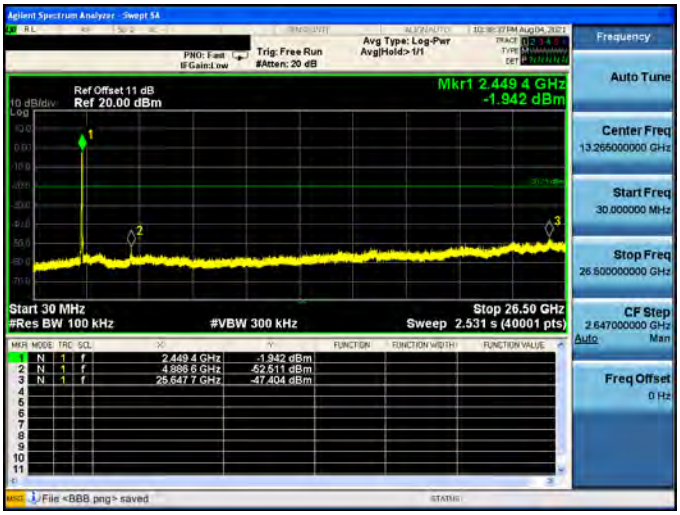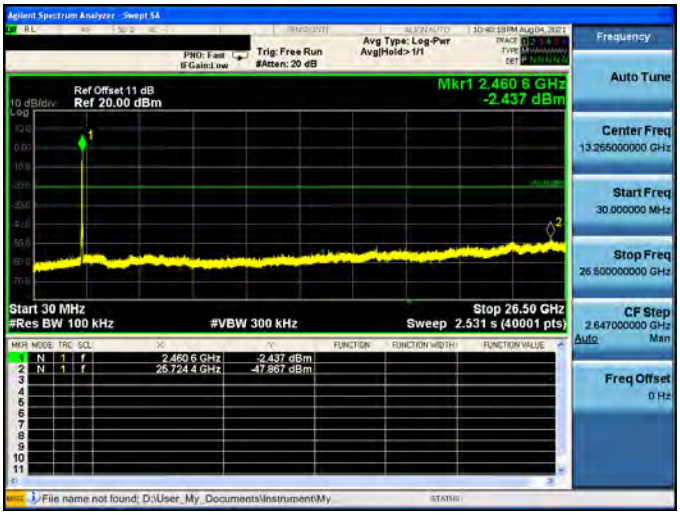Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 1	
CH03	
CH06	
CH09	

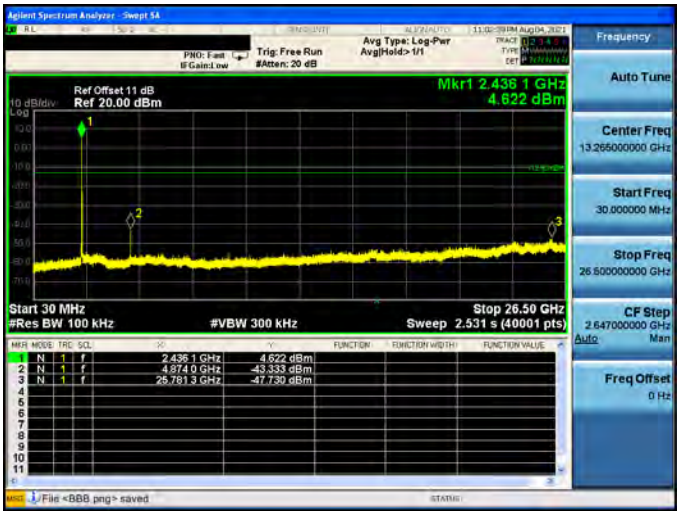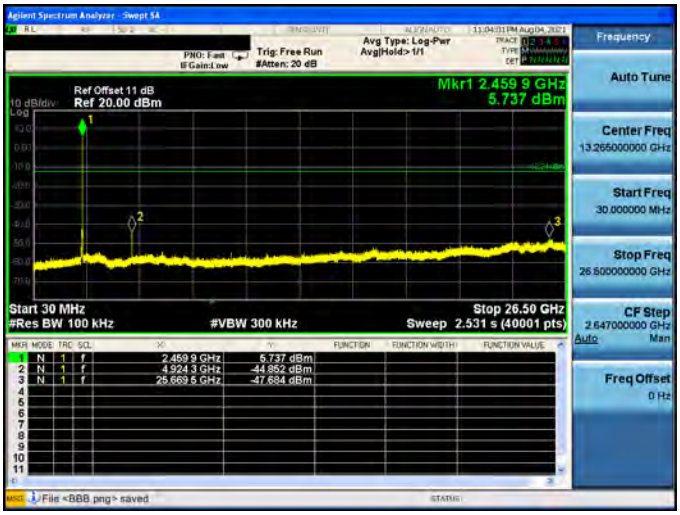Mode 1: IEEE 802.11b Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

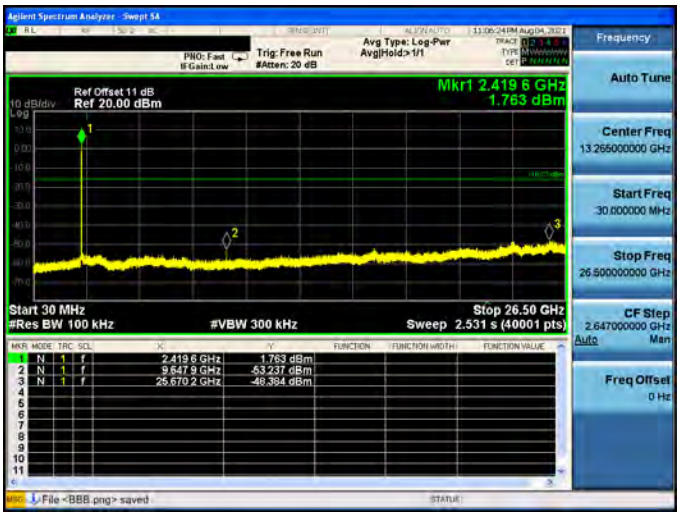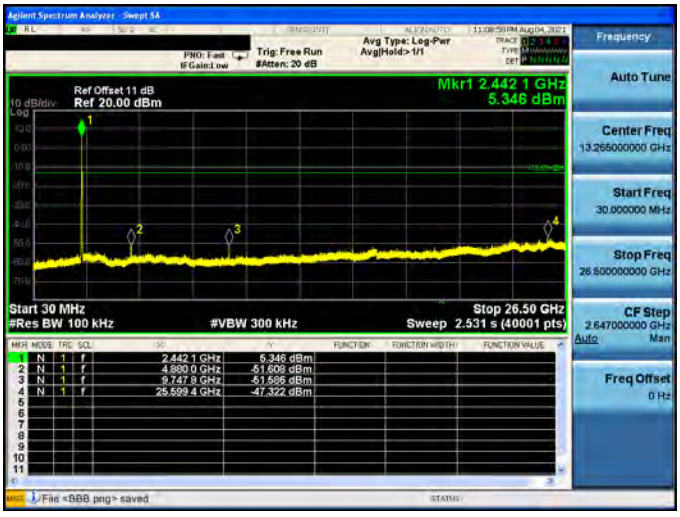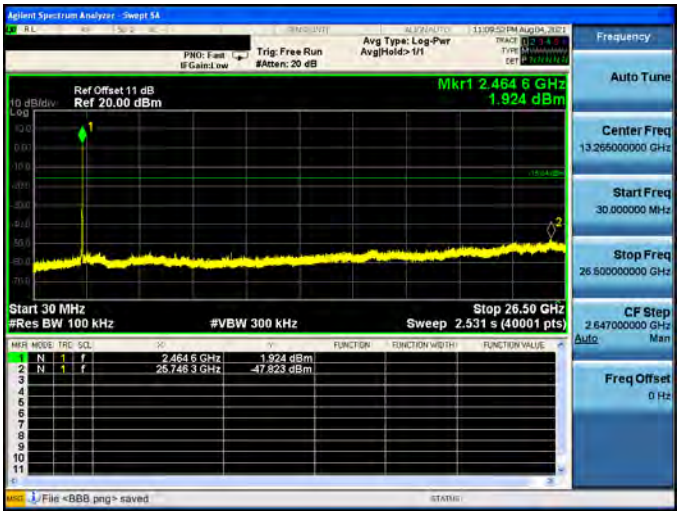Mode 2: IEEE 802.11g Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

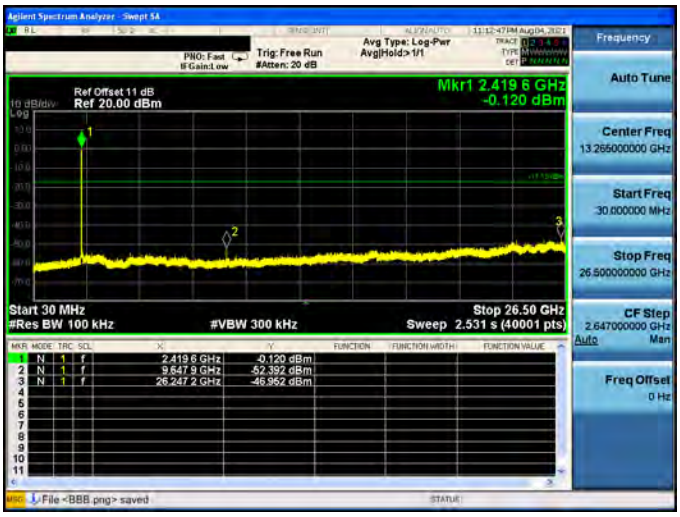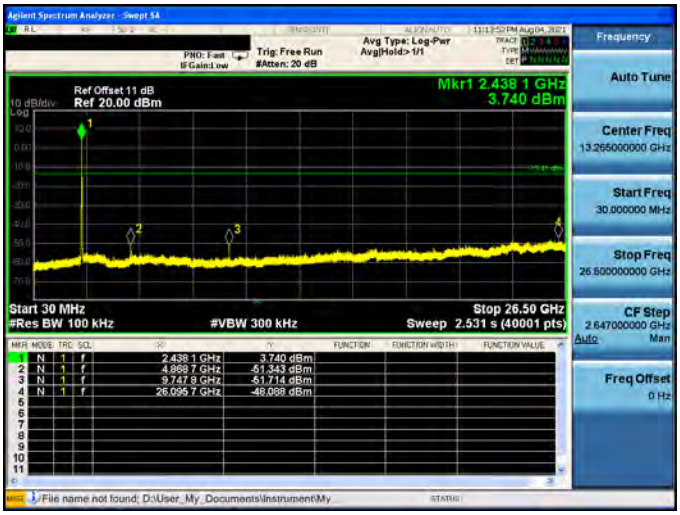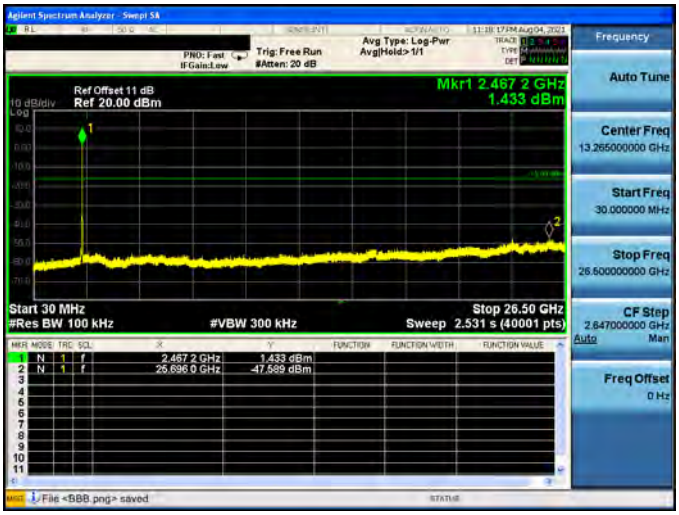Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

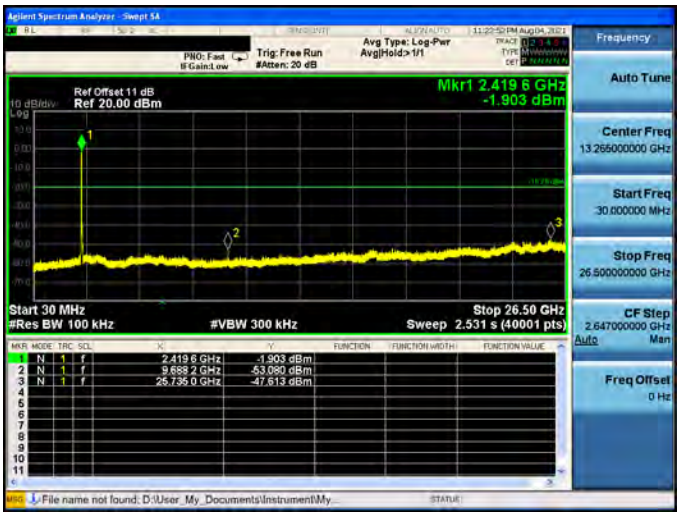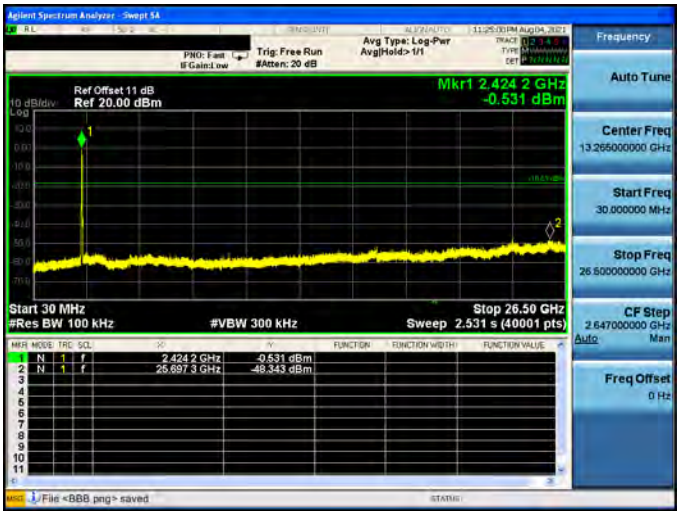Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 2	
CH03	
CH06	
CH09	

Reference level


Mode 1: IEEE 802.11b Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 2: IEEE 802.11g Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 1	
CH03	
CH06	
CH09	



Mode 1: IEEE 802.11b Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	


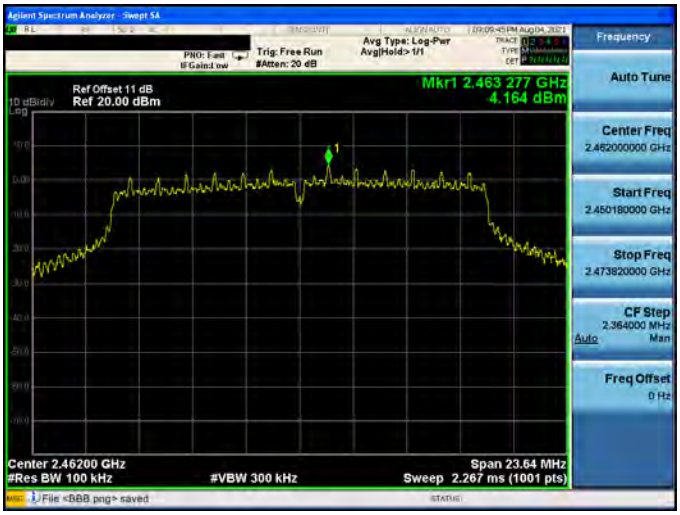
Mode 2: IEEE 802.11g Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	



Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	



Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 2	
CH03	
CH06	
CH09	



Conducted Band Edge

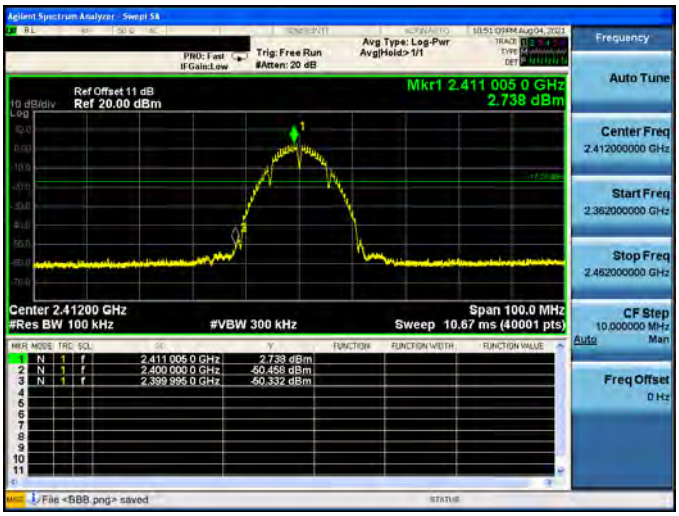
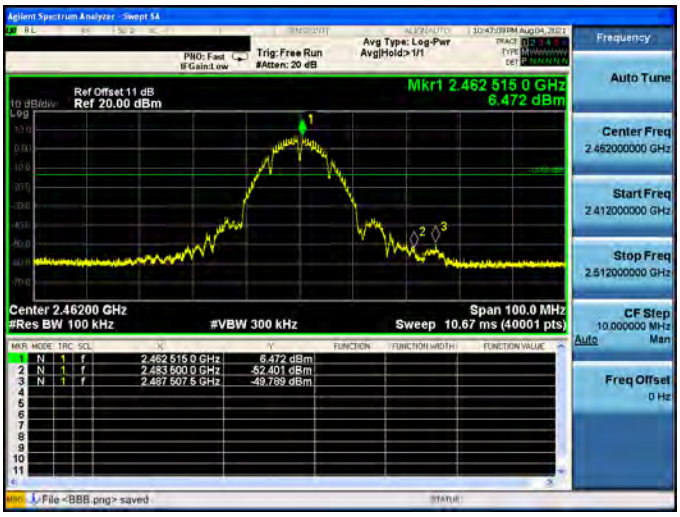
Mode 1: IEEE 802.11b Continuous TX Mode_ANT 1	
CH01	
CH11	

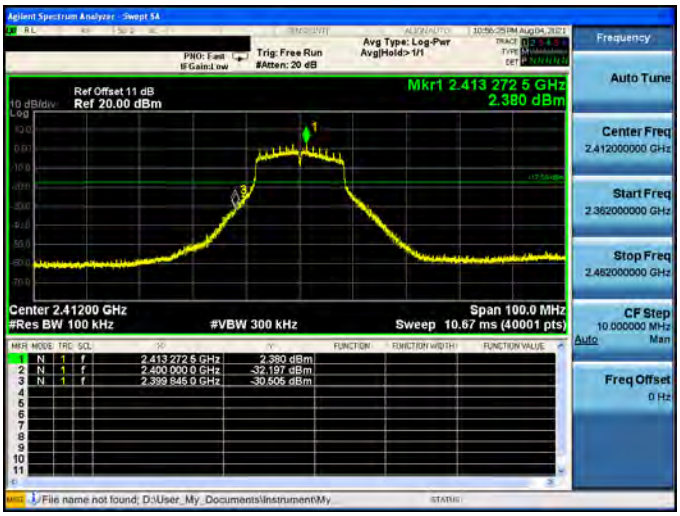
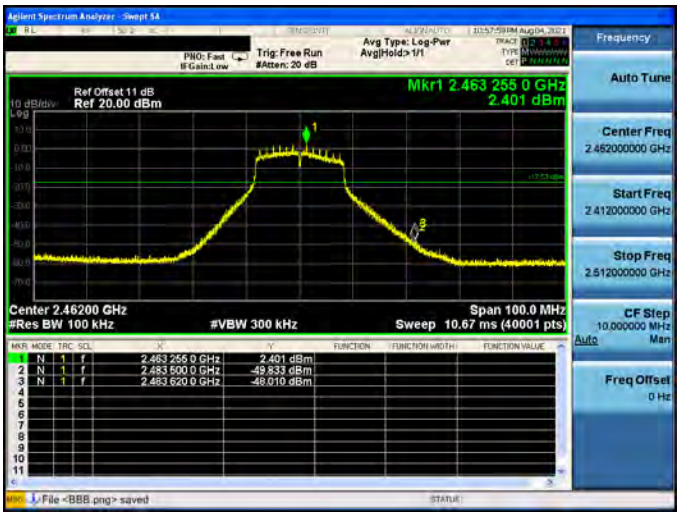
Mode 2: IEEE 802.11g Continuous TX Mode_ANT 1	
CH01	
CH11	

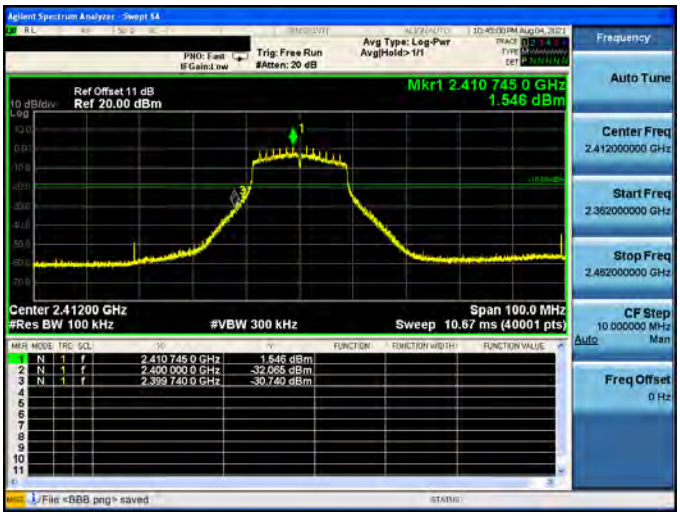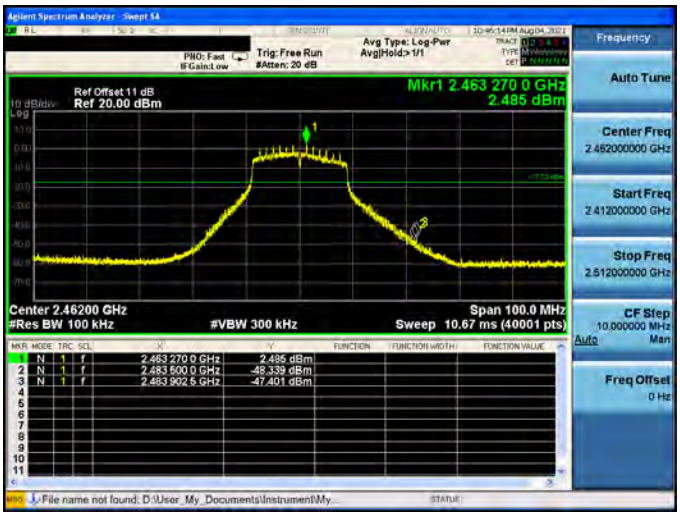
Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 1	
CH01	
CH11	

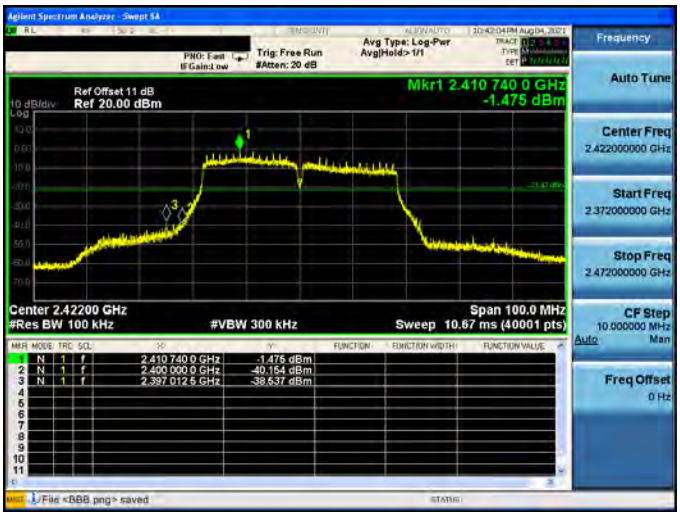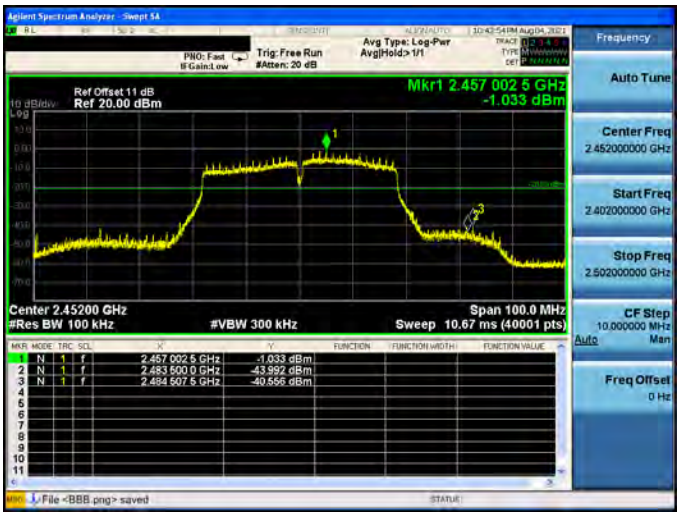Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 1	
CH03	
CH09	

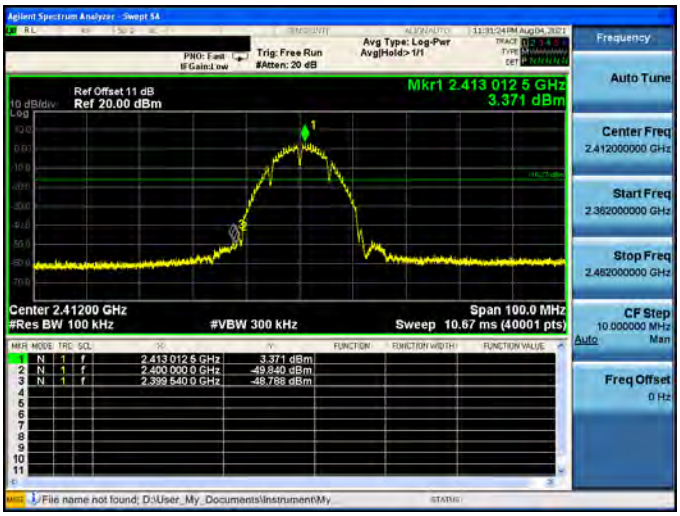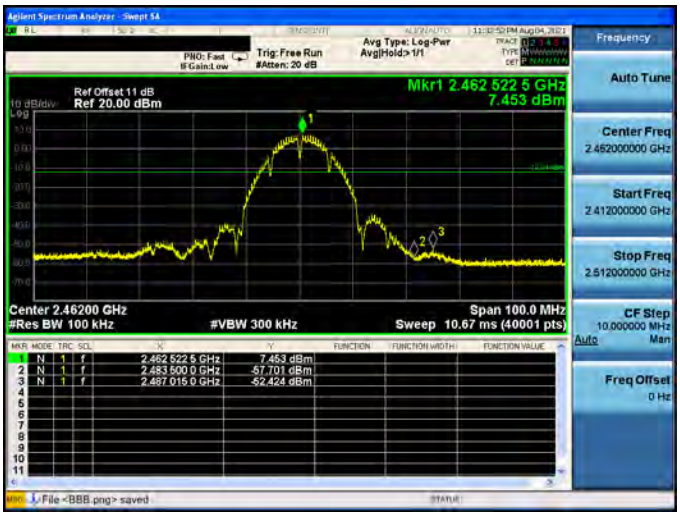Mode 1: IEEE 802.11b Continuous TX Mode_ANT 2	
CH01	
CH11	

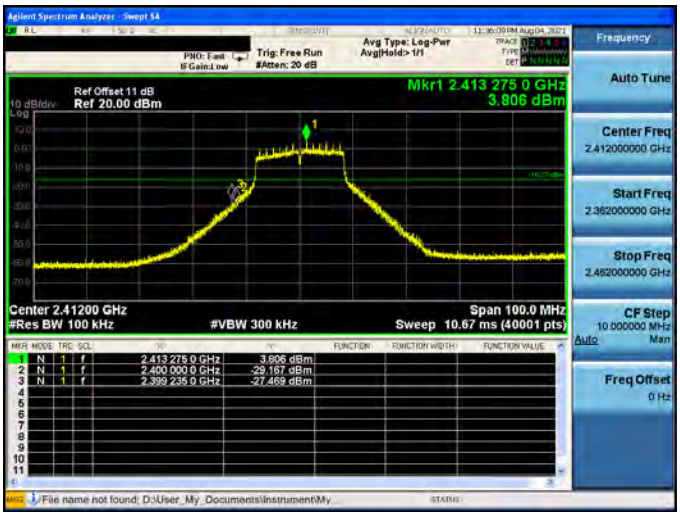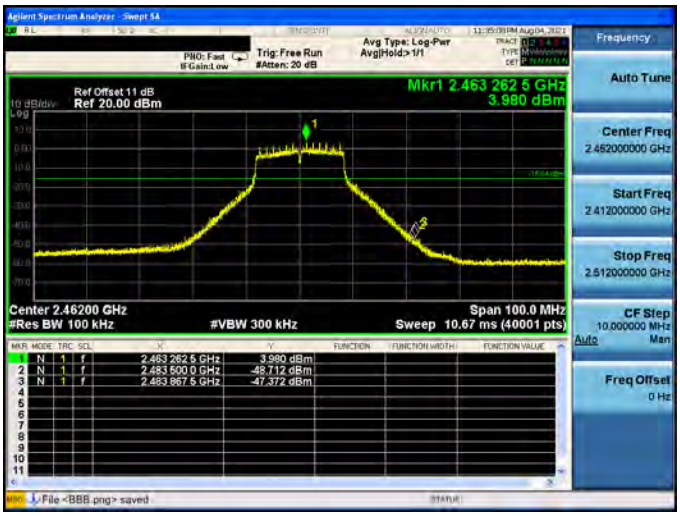Mode 2: IEEE 802.11g Continuous TX Mode_ANT 2	
CH01	
CH11	

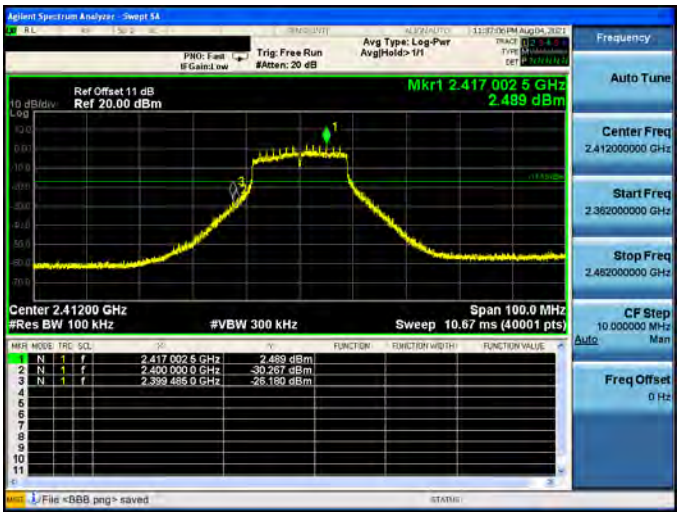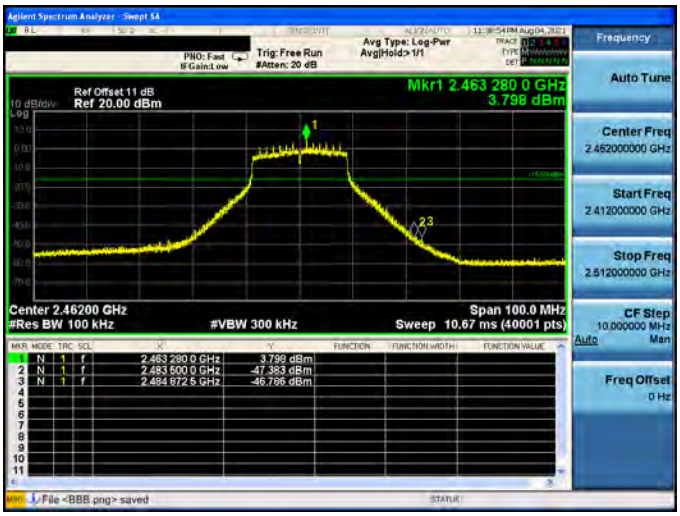Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 2	
CH01	
CH11	

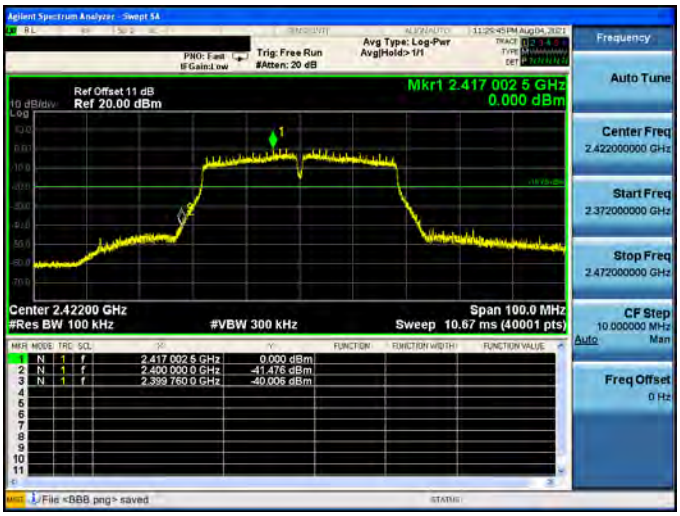Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 2	
CH03	
CH09	

6 dB Bandwidth

操作模式	頻道	量測值 (kHz)		限制值 (kHz)
		ANT 1	ANT 2	
Mode 1	CH01	8098	9023	≥ 500
	CH06	8588	9550	≥ 500
	CH11	8094	8590	≥ 500
Mode 2	CH01	15160	15700	≥ 500
	CH06	15750	15750	≥ 500
	CH11	15130	15760	≥ 500
Mode 3	CH01	15150	16310	≥ 500
	CH06	16650	16930	≥ 500
	CH11	15140	16360	≥ 500
Mode 4	CH03	32670	35120	≥ 500
	CH06	36410	35770	≥ 500
	CH09	28860	36420	≥ 500

Mode 1: IEEE 802.11b Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 2: IEEE 802.11g Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 1	
CH03	
CH06	
CH09	

Mode 1: IEEE 802.11b Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

Mode 2: IEEE 802.11g Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 2	
CH03	
CH06	
CH09	


Maximum Power Spectral Density

操作模式	頻道	量測值 (dBm/3 kHz)		計算值 (dBm/3 kHz)	限制值 (dBm/3 kHz)
		ANT 1	ANT 2	ANT 1+2	
Mode 1	CH01	-10.376	-10.841	-7.592	≤ 7.49
	CH06	-7.246	-6.032	-3.586	≤ 7.49
	CH11	-6.944	-5.966	-3.417	≤ 7.49
Mode 2	CH01	-11.226	-11.354	-8.279	≤ 7.49
	CH06	-8.047	-7.408	-4.705	≤ 7.49
	CH11	-12.012	-11.068	-8.504	≤ 7.49
Mode 3	CH01	-14.502	-12.498	-10.375	≤ 7.49
	CH06	-10.103	-8.907	-6.454	≤ 7.49
	CH11	-12.823	-11.958	-9.359	≤ 7.49
Mode 4	CH03	-16.883	-14.661	-12.621	≤ 7.49
	CH06	-14.719	-13.229	-10.900	≤ 7.49
	CH09	-16.459	-14.698	-12.480	≤ 7.49

Mode 1: IEEE 802.11b Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	



Mode 2: IEEE 802.11g Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	




Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 1	
CH01	
CH06	
CH11	

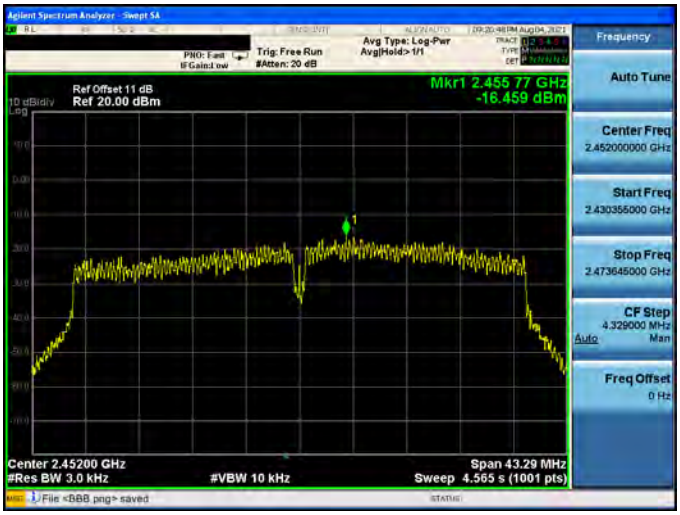Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 1	
CH03	
CH06	
CH09	

Mode 1: IEEE 802.11b Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

Mode 2: IEEE 802.11g Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

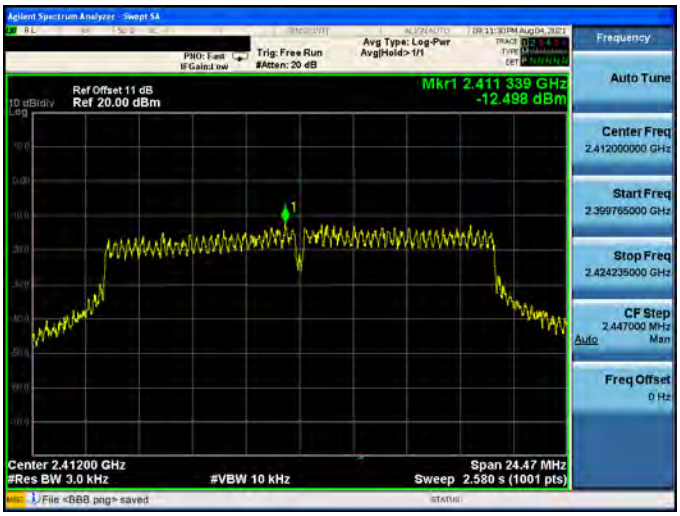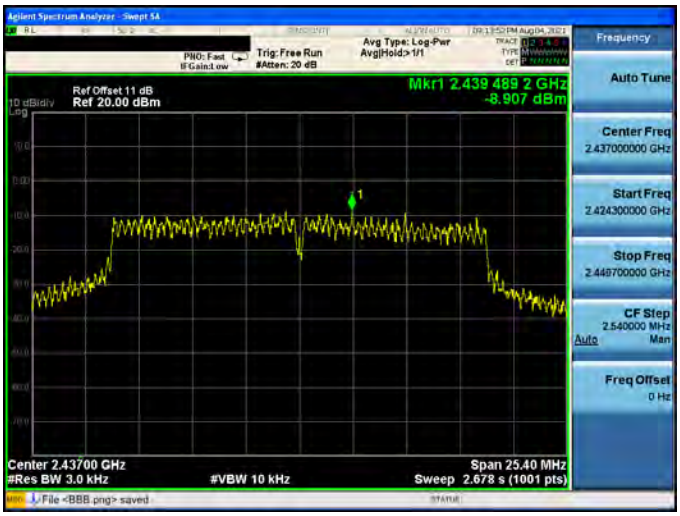Mode 3: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT 2	
CH01	
CH06	
CH11	

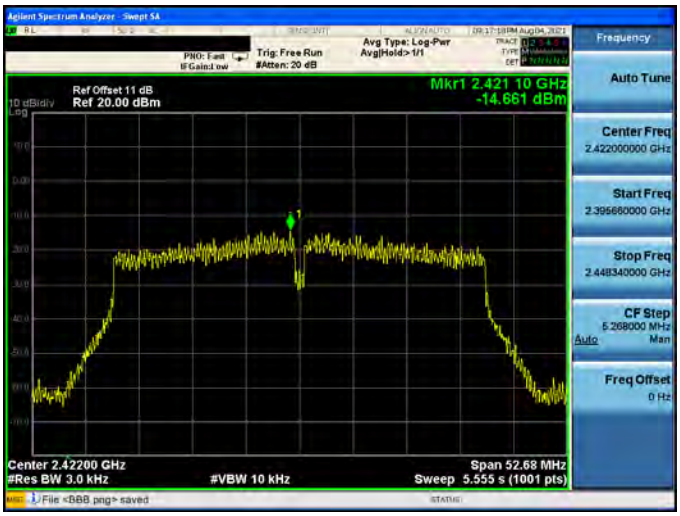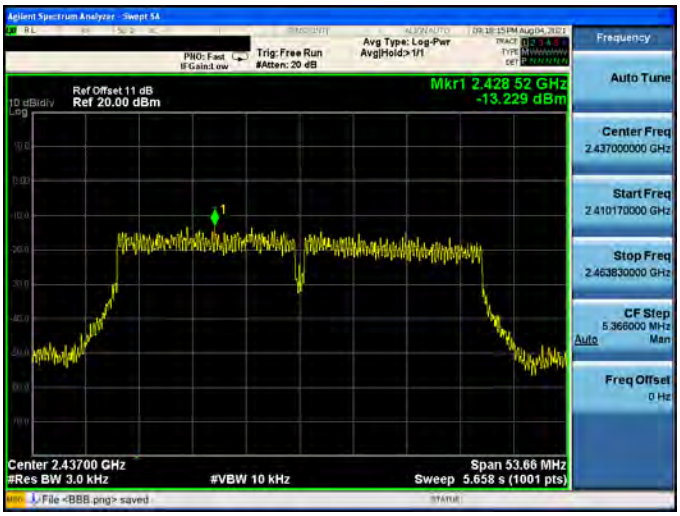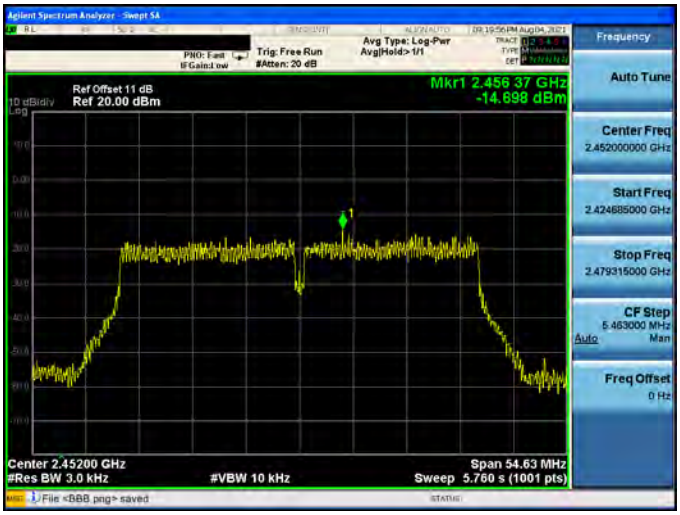
Mode 4: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT 2	
CH03	
CH06	
CH09	

Annex D. Radiated Emission Measurement (5 GHz)

Dipole Antenna

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

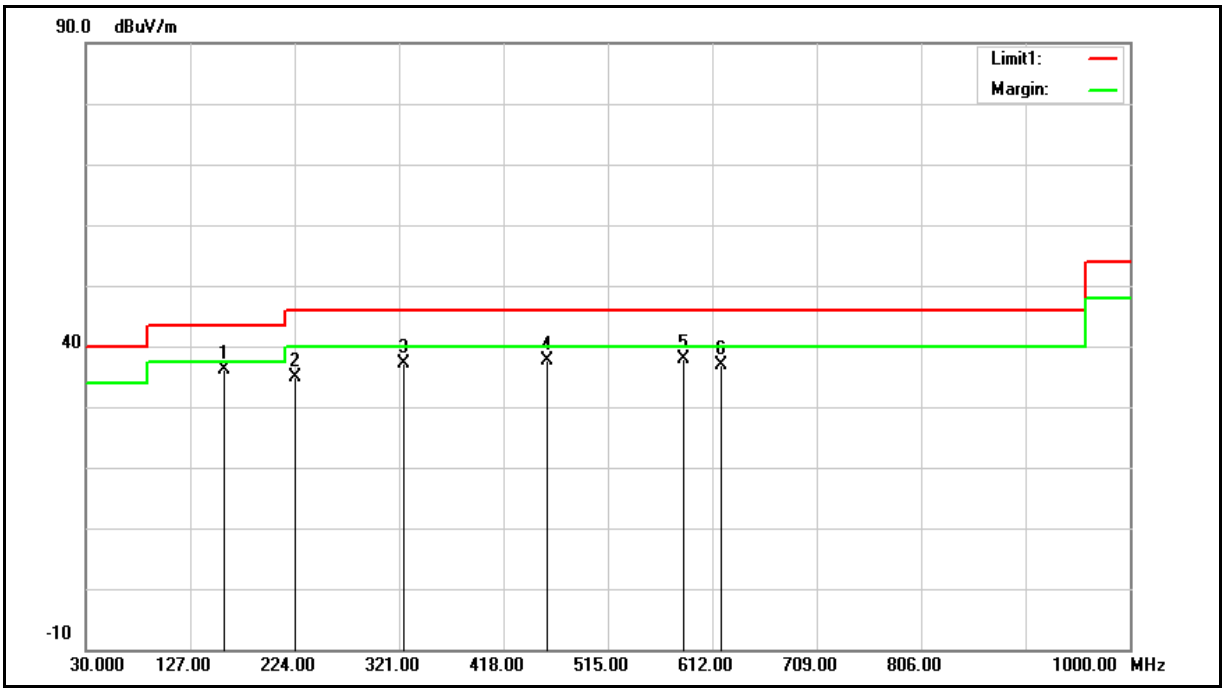

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.0100	43.23	-7.01	36.22	43.50	-7.28	QP
2	224.9700	43.53	-8.55	34.98	46.00	-11.02	QP
3	325.8500	42.60	-5.40	37.20	46.00	-8.80	QP
4	458.7400	40.70	-3.01	37.69	46.00	-8.31	QP
5	585.8100	38.44	-0.62	37.82	46.00	-8.18	QP
6	620.7300	37.02	-0.07	36.95	46.00	-9.05	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 36.22 = -7.01 + 43.23

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

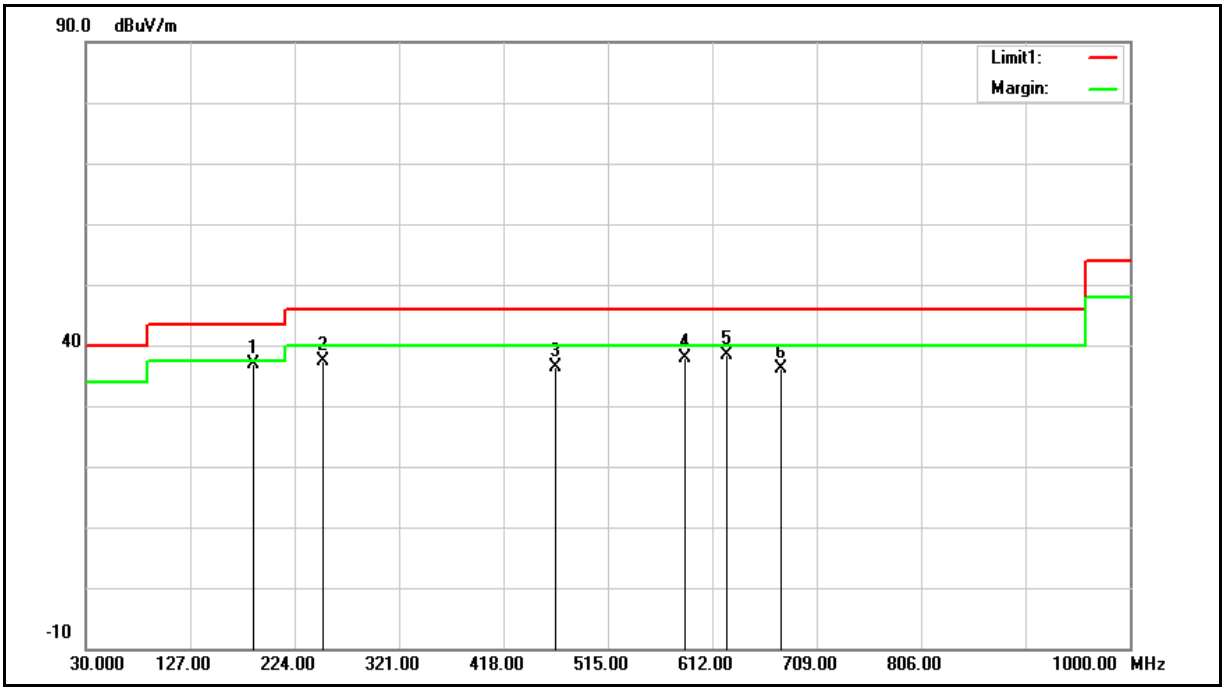

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.2000	45.52	-8.67	36.85	43.50	-6.65	QP
2	250.1900	44.75	-7.44	37.31	46.00	-8.69	QP
3	466.5000	39.36	-2.95	36.41	46.00	-9.59	QP
4	586.7800	38.40	-0.60	37.80	46.00	-8.20	QP
5	625.5800	38.50	-0.04	38.46	46.00	-7.54	QP
6	676.0200	35.54	0.54	36.08	46.00	-9.92	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.85 = -8.67 + 45.52

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

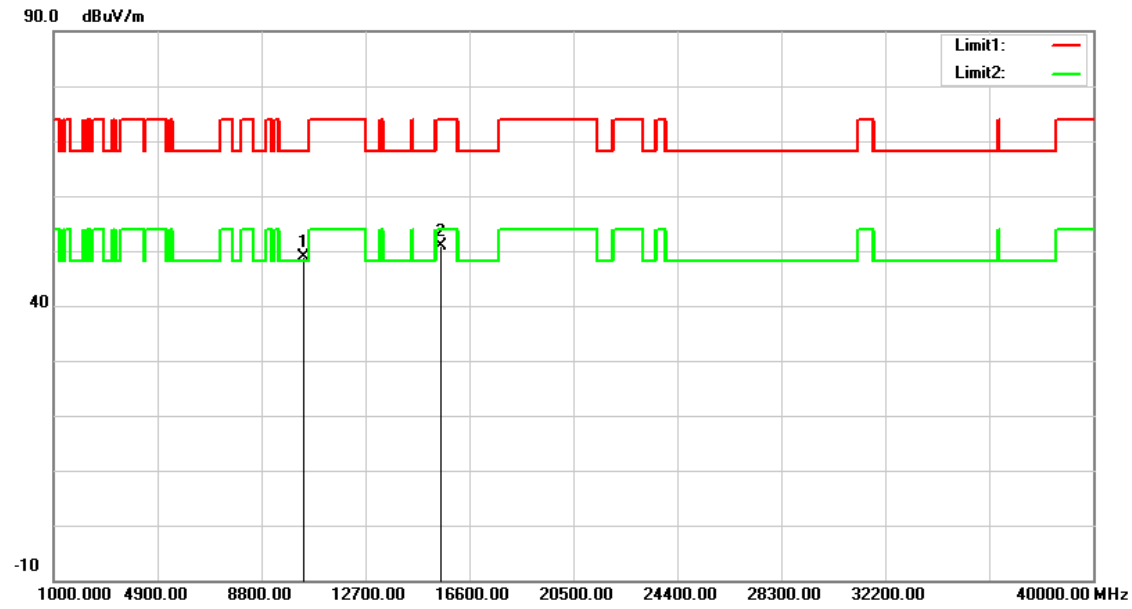

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.52	13.47	48.99	68.20	-19.21	peak
2	15540.000	35.11	15.74	50.85	74.00	-23.15	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 48.99 = 13.47 + 35.52

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

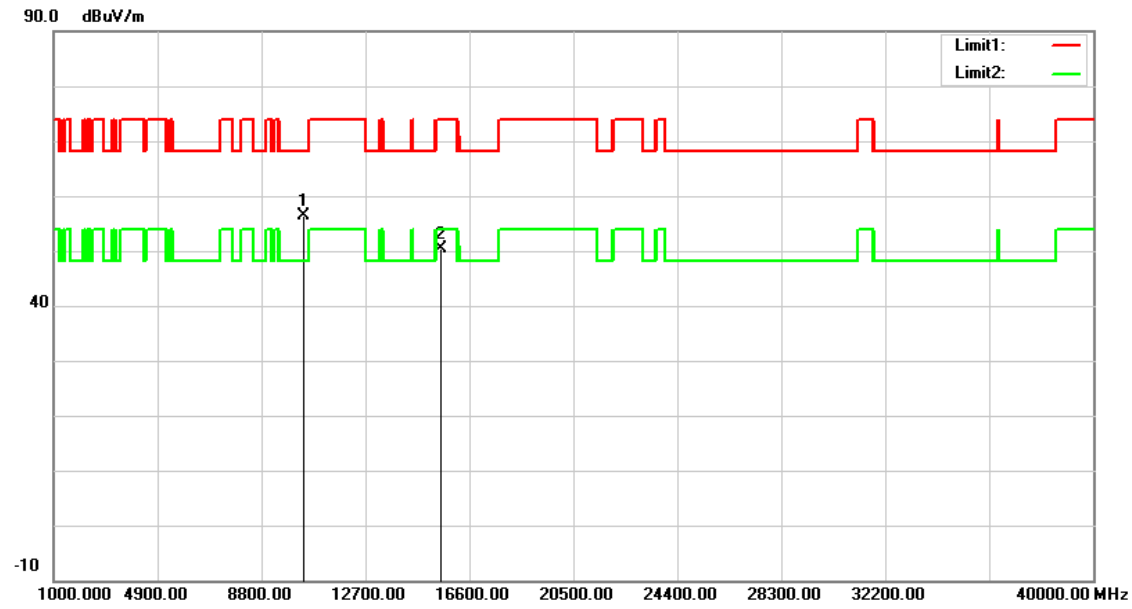

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	42.92	13.47	56.39	68.20	-11.81	peak
2	15540.000	34.53	15.74	50.27	74.00	-23.73	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 56.39 = 13.47 + 42.92

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

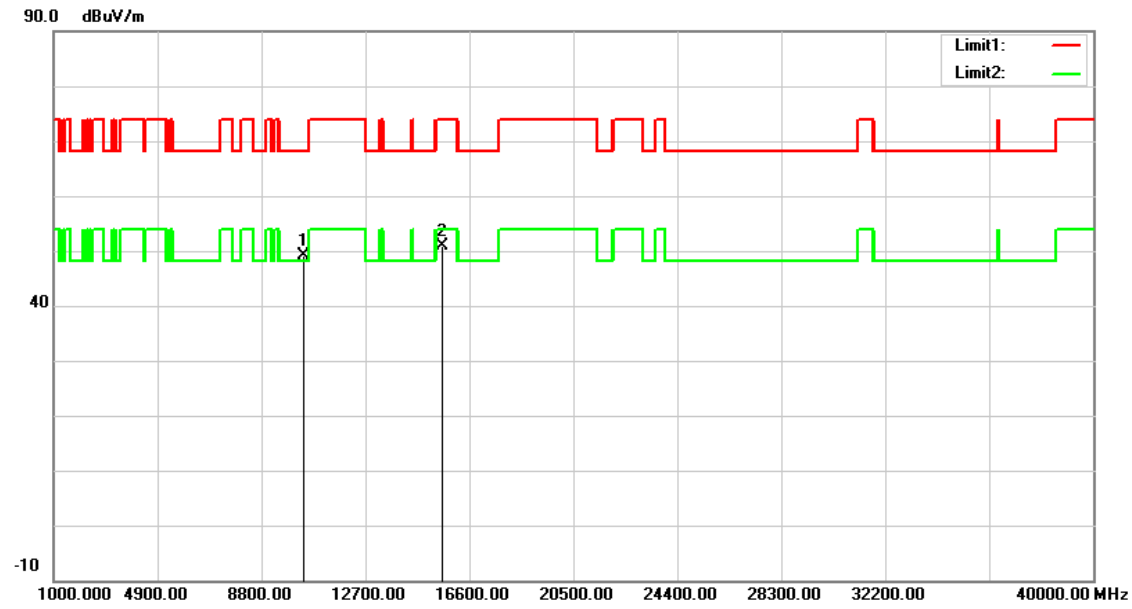


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.59	13.61	49.20	68.20	-19.00	peak
2	15600.000	35.28	15.59	50.87	74.00	-23.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

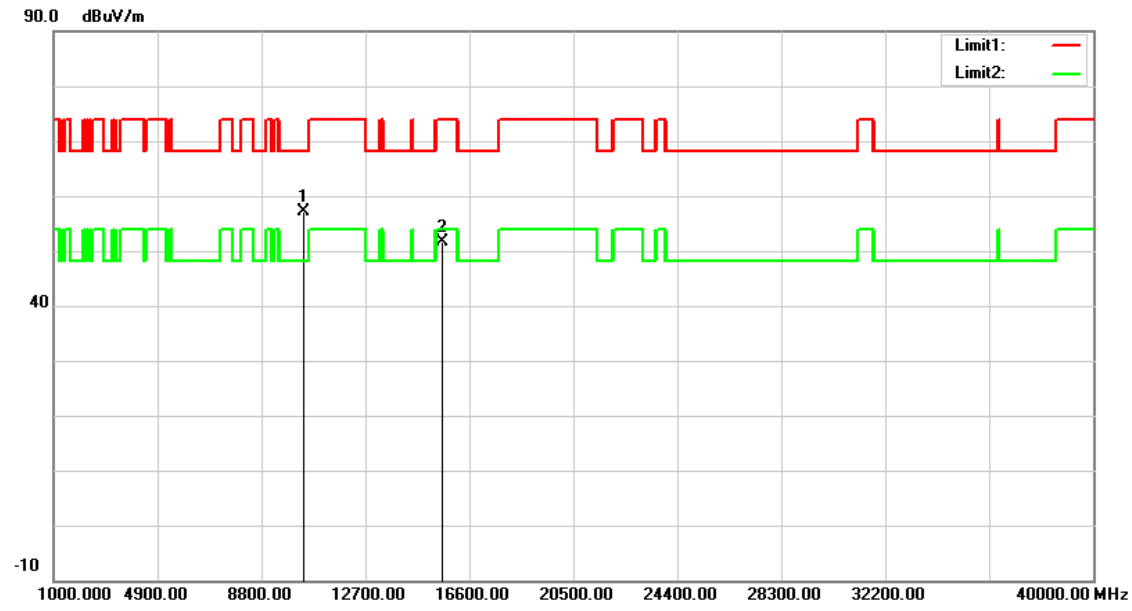


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	43.49	13.61	57.10	68.20	-11.10	peak
2	15600.000	36.06	15.59	51.65	74.00	-22.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

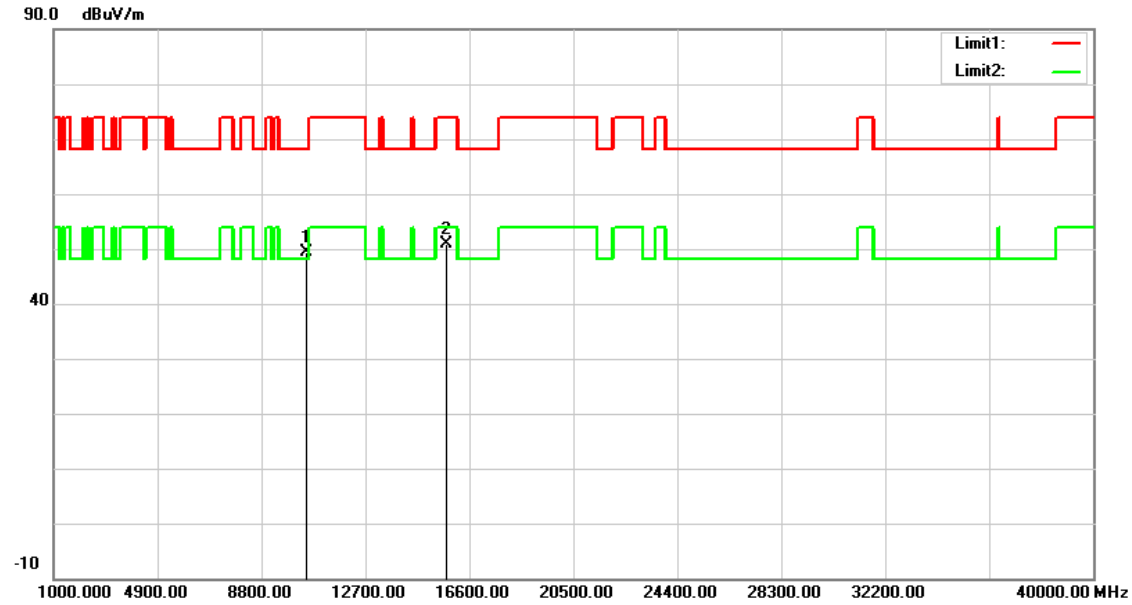


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.38	13.90	49.28	68.20	-18.92	peak
2	15720.000	35.51	15.30	50.81	74.00	-23.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

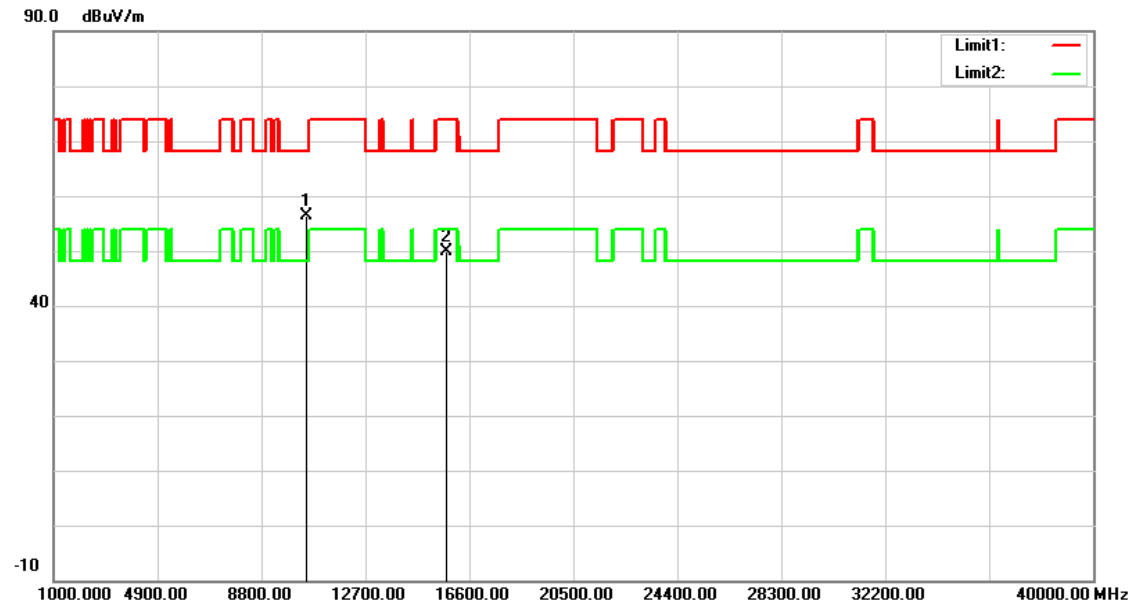


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	42.48	13.90	56.38	68.20	-11.82	peak
2	15720.000	34.60	15.30	49.90	74.00	-24.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

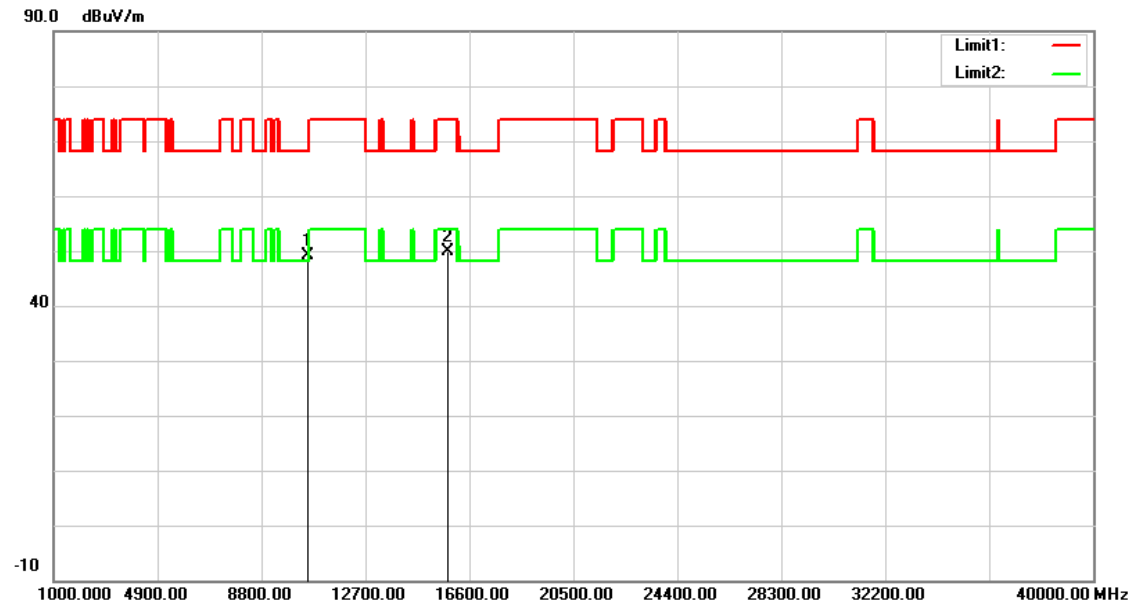


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.05	13.99	49.04	68.20	-19.16	peak
2	15780.000	34.77	15.18	49.95	74.00	-24.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

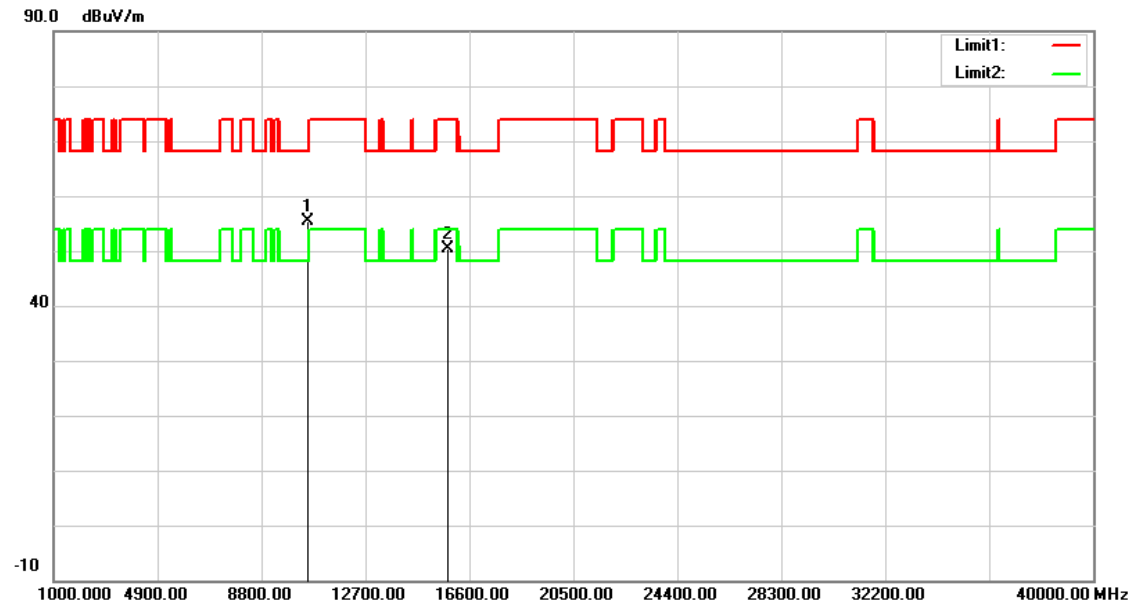


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	41.43	13.99	55.42	68.20	-12.78	peak
2	15780.000	35.23	15.18	50.41	74.00	-23.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

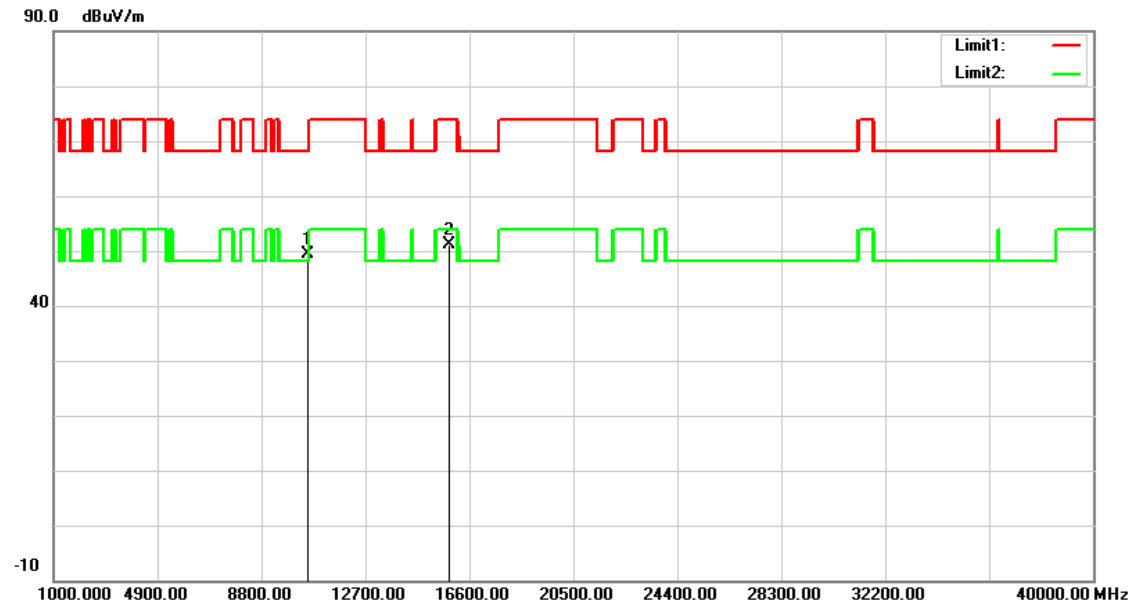


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.38	14.03	49.41	68.20	-18.79	peak
2	15840.000	36.14	15.04	51.18	74.00	-22.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

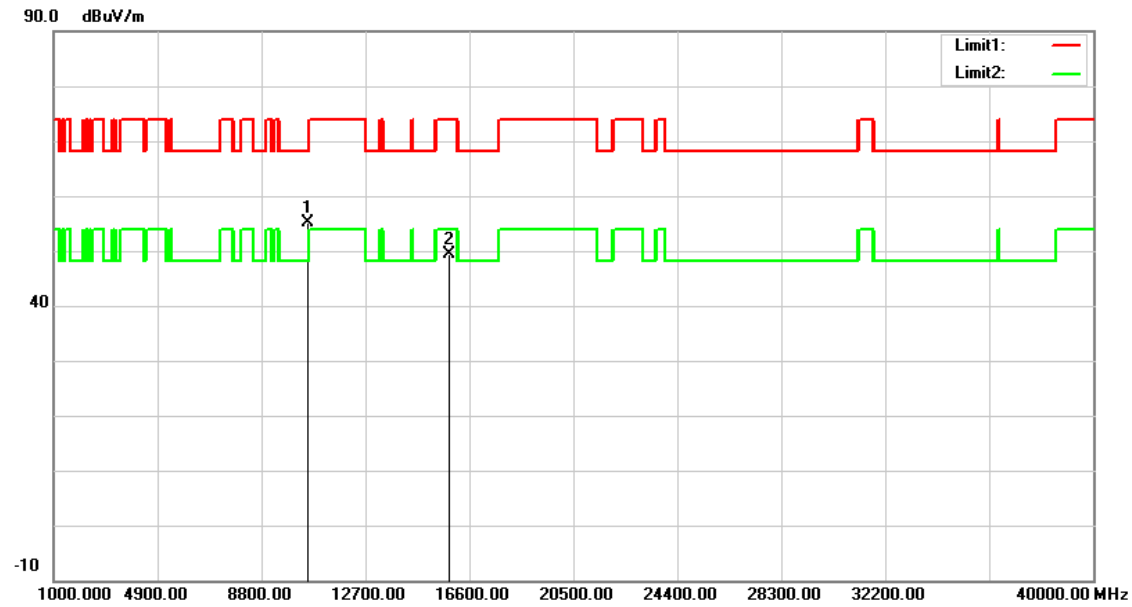


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	41.06	14.03	55.09	68.20	-13.11	peak
2	15840.000	34.36	15.04	49.40	74.00	-24.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

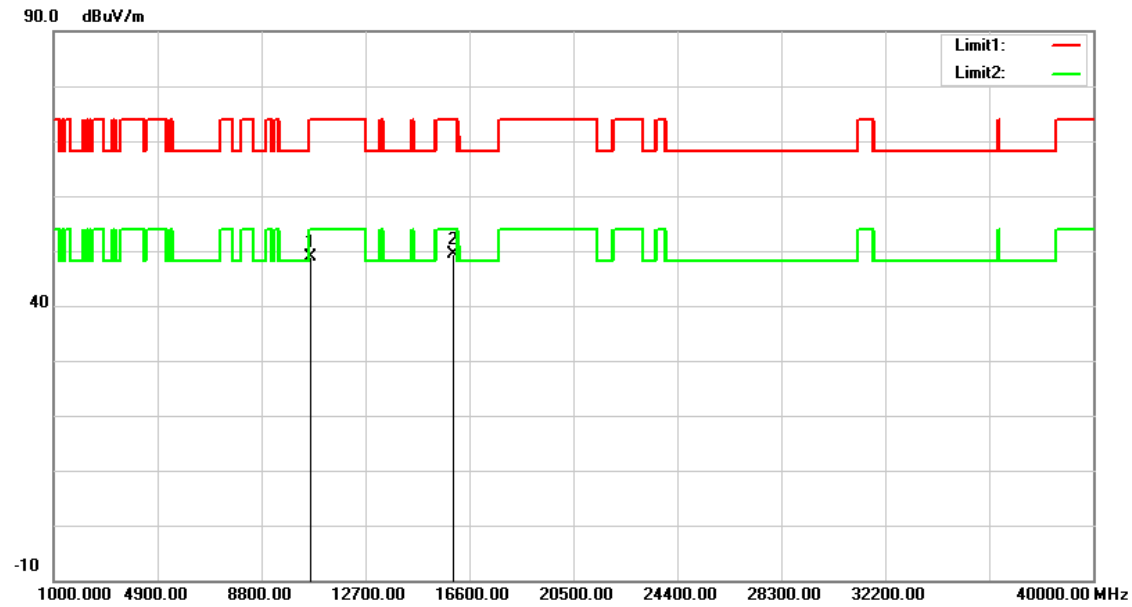


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.83	14.12	48.95	74.00	-25.05	peak
2	15960.000	34.66	14.75	49.41	74.00	-24.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

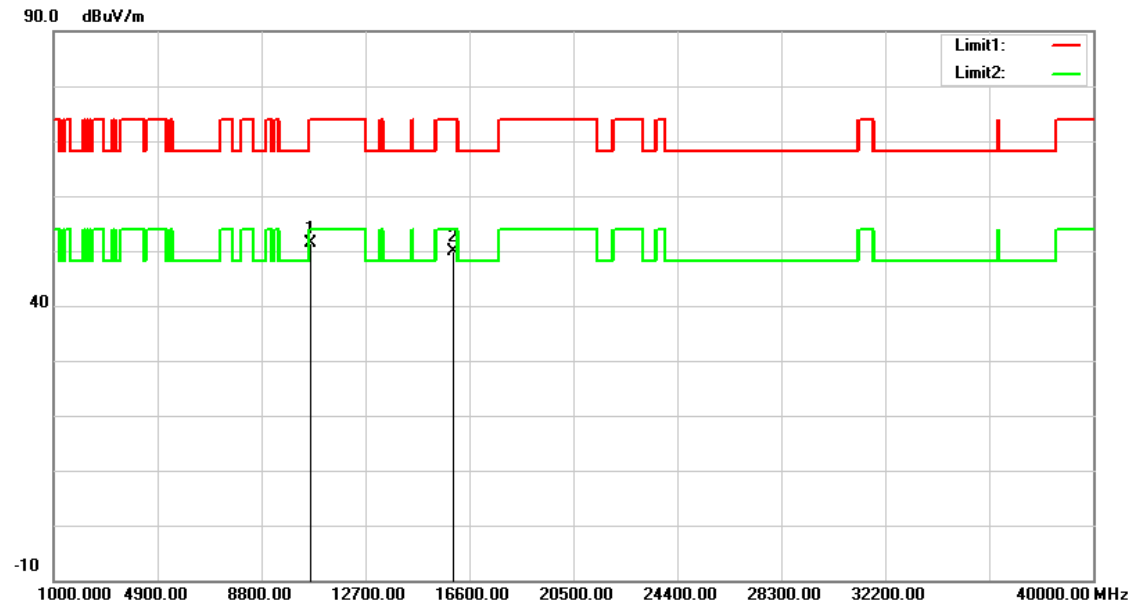


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	37.24	14.12	51.36	74.00	-22.64	peak
2	15960.000	35.08	14.75	49.83	74.00	-24.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

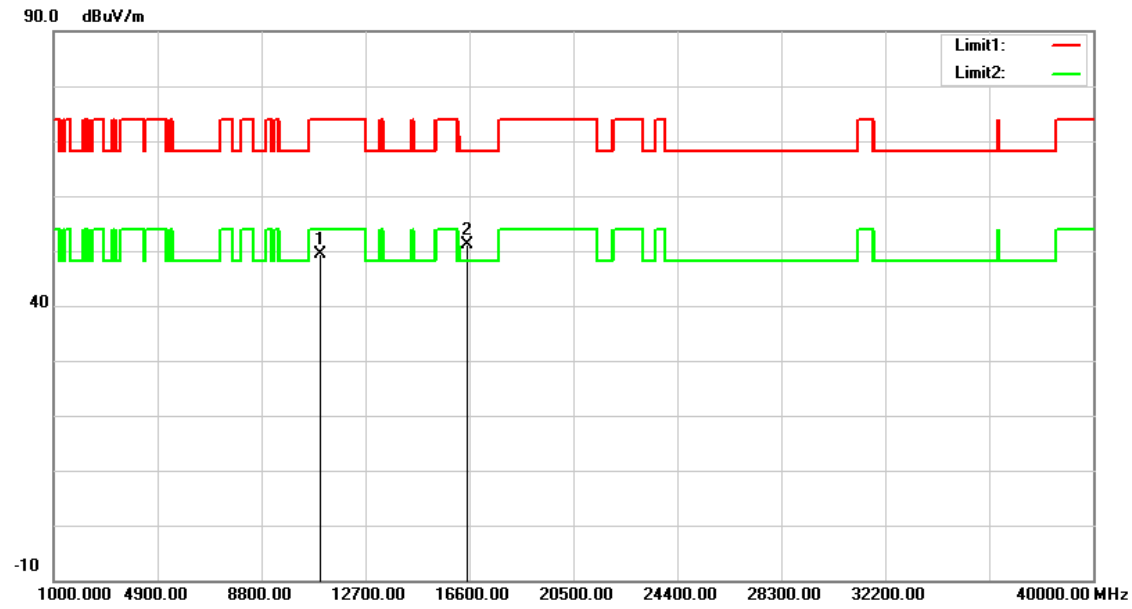


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.87	14.53	49.40	74.00	-24.60	peak
2	16500.000	35.32	15.80	51.12	68.20	-17.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

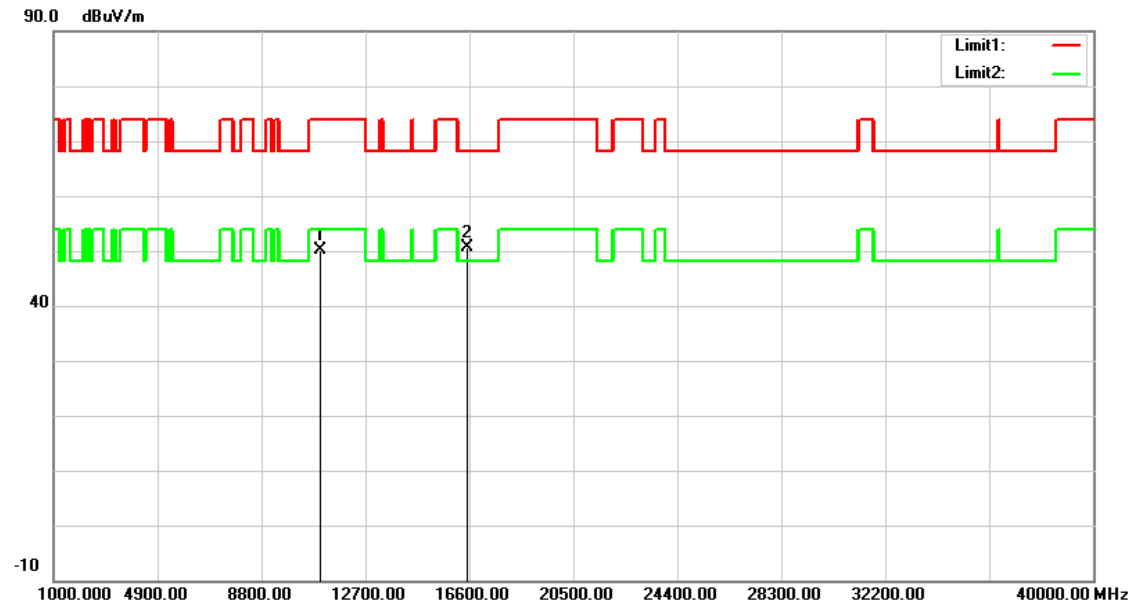


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.69	14.53	50.22	74.00	-23.78	peak
2	16500.000	34.89	15.80	50.69	68.20	-17.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

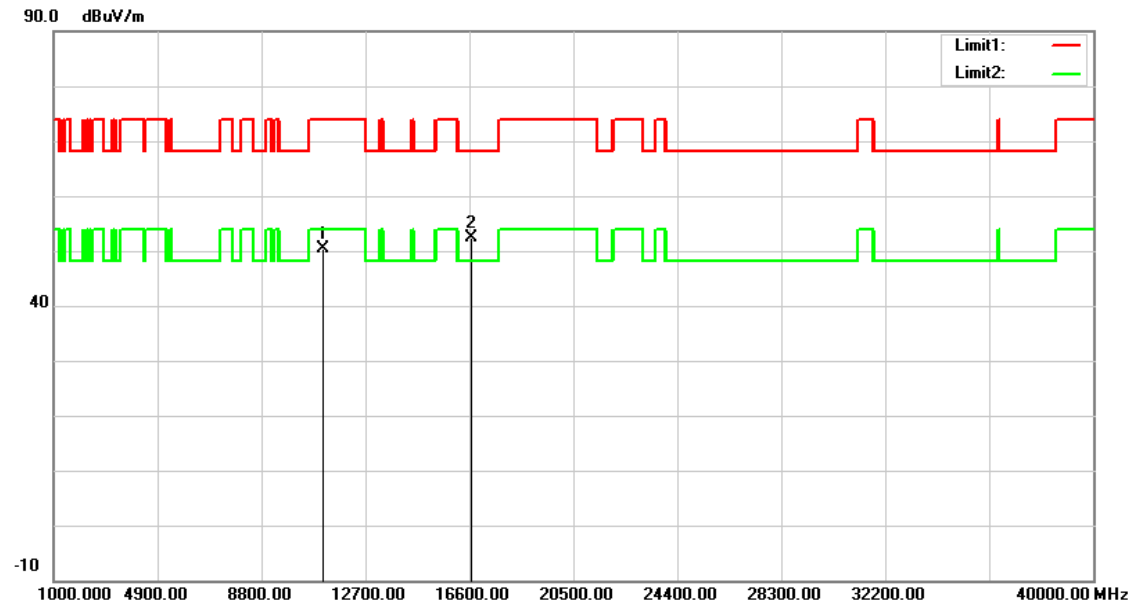


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.69	14.66	50.35	74.00	-23.65	peak
2	16680.000	35.53	16.79	52.32	68.20	-15.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

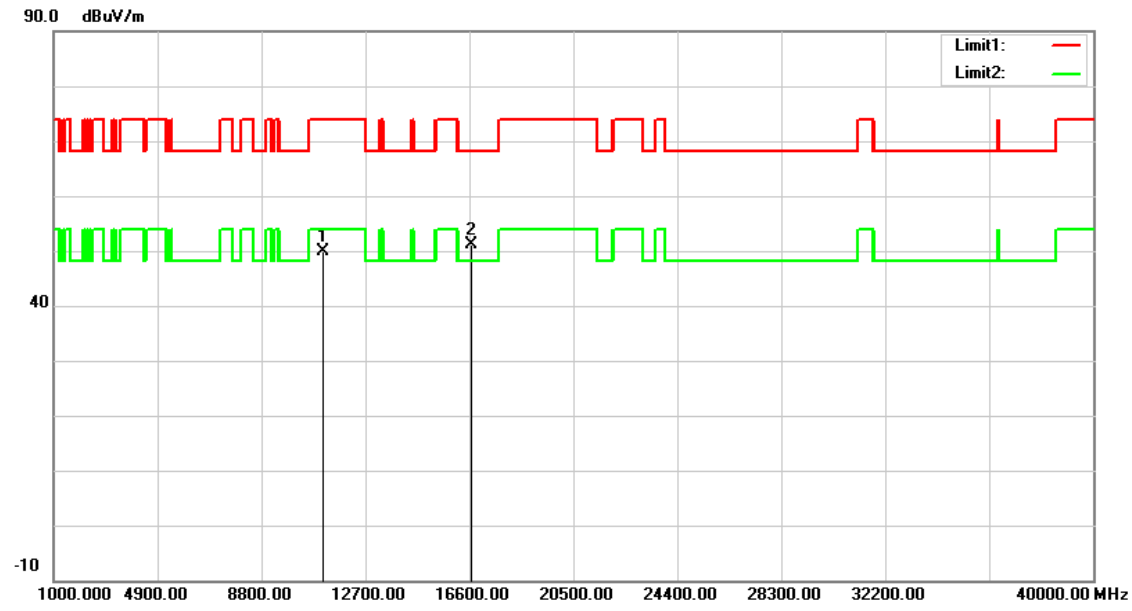


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.13	14.66	49.79	74.00	-24.21	peak
2	16680.000	34.41	16.79	51.20	68.20	-17.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

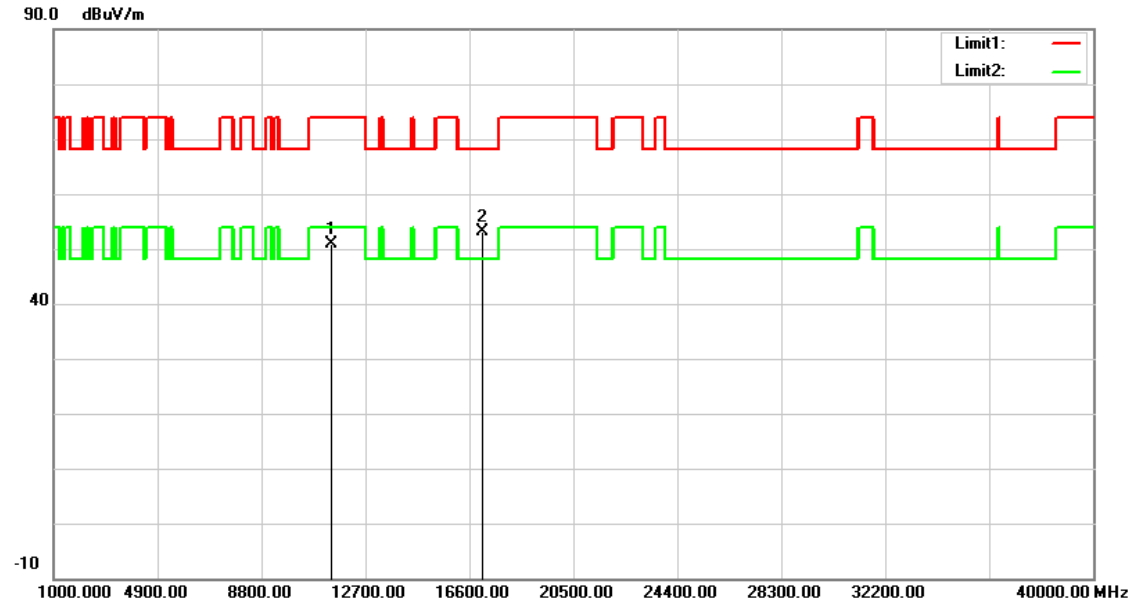


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.92	14.93	50.85	74.00	-23.15	peak
2	17100.000	34.14	19.06	53.20	68.20	-15.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

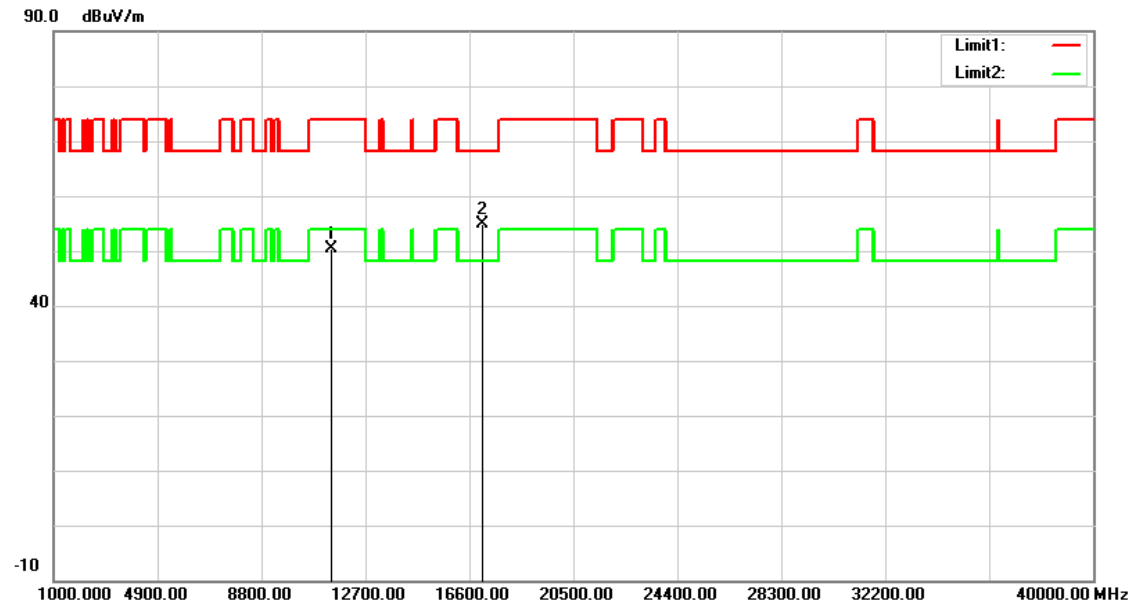


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.33	14.93	50.26	74.00	-23.74	peak
2	17100.000	35.73	19.06	54.79	68.20	-13.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

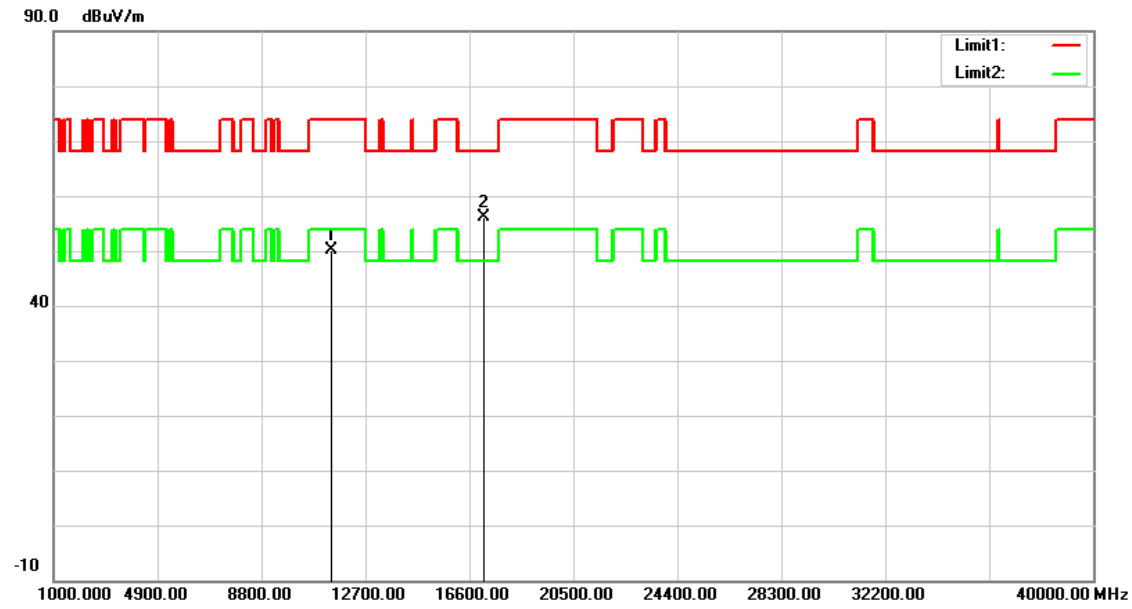


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	35.18	14.97	50.15	74.00	-23.85	peak
2	17160.000	36.68	19.36	56.04	68.20	-12.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

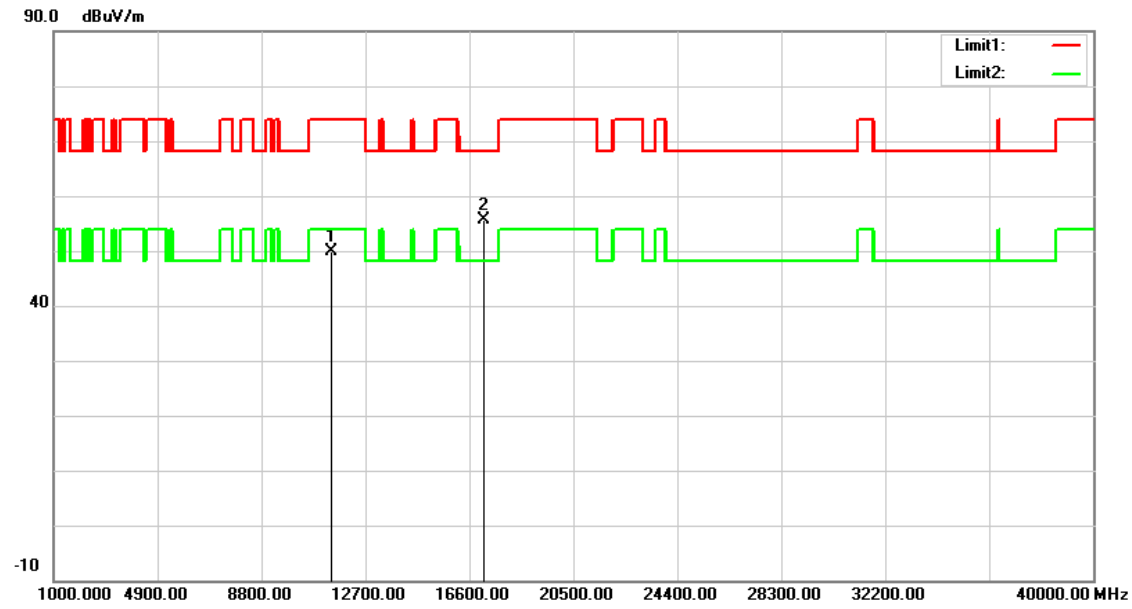


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.90	14.97	49.87	74.00	-24.13	peak
2	17160.000	36.33	19.36	55.69	68.20	-12.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

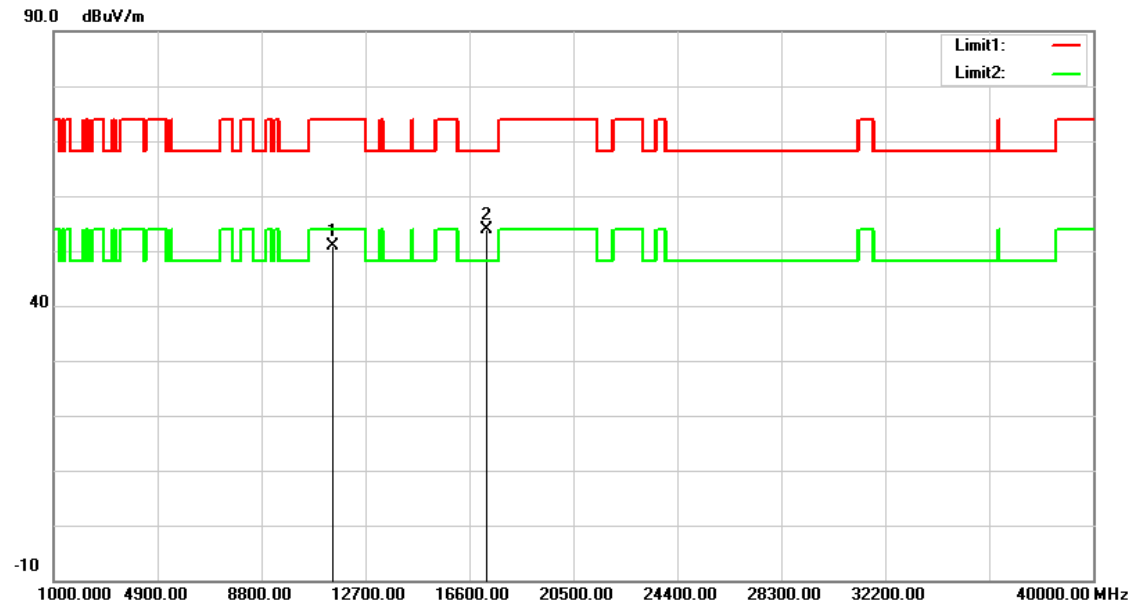


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.84	15.02	50.86	74.00	-23.14	peak
2	17235.000	34.03	19.74	53.77	68.20	-14.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

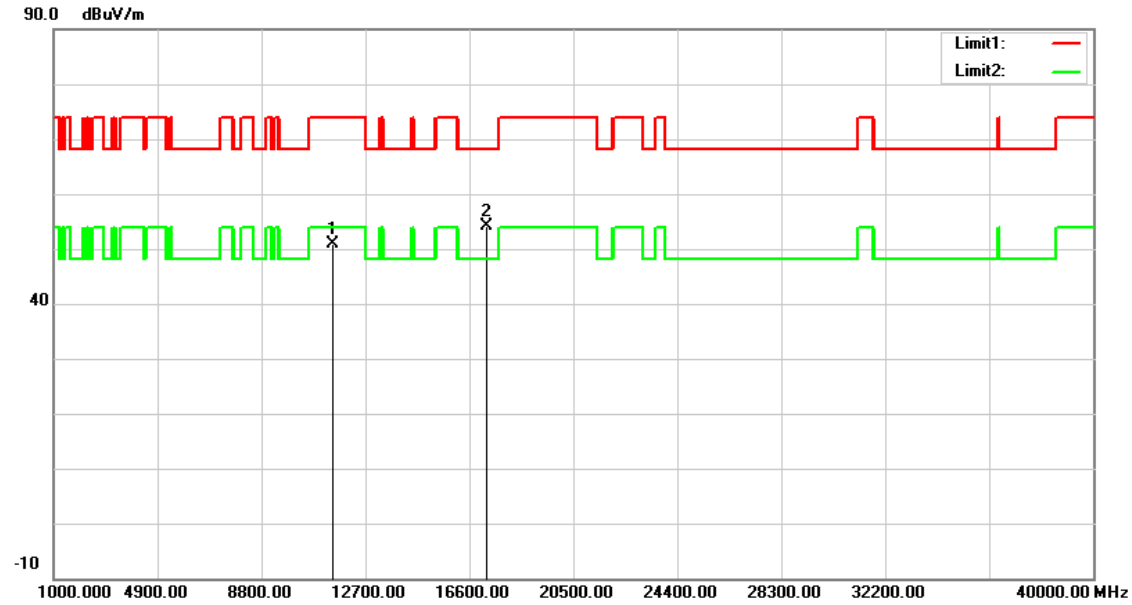


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.96	15.02	50.98	74.00	-23.02	peak
2	17235.000	34.39	19.74	54.13	68.20	-14.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

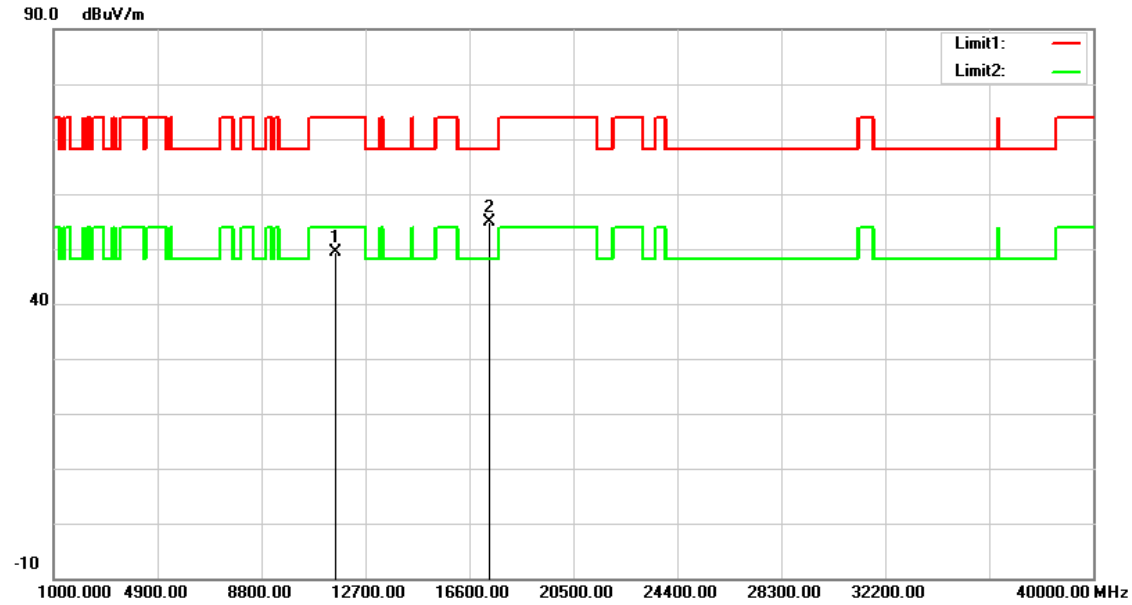


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.47	14.89	49.36	74.00	-24.64	peak
2	17355.000	34.59	20.34	54.93	68.20	-13.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

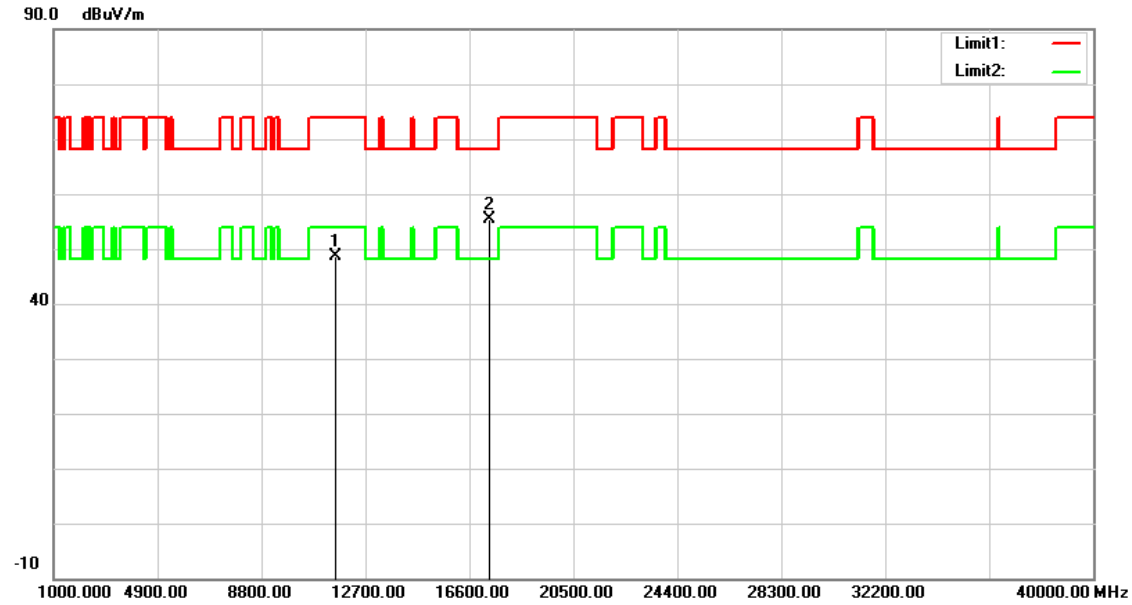


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.80	14.89	48.69	74.00	-25.31	peak
2	17355.000	35.01	20.34	55.35	68.20	-12.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

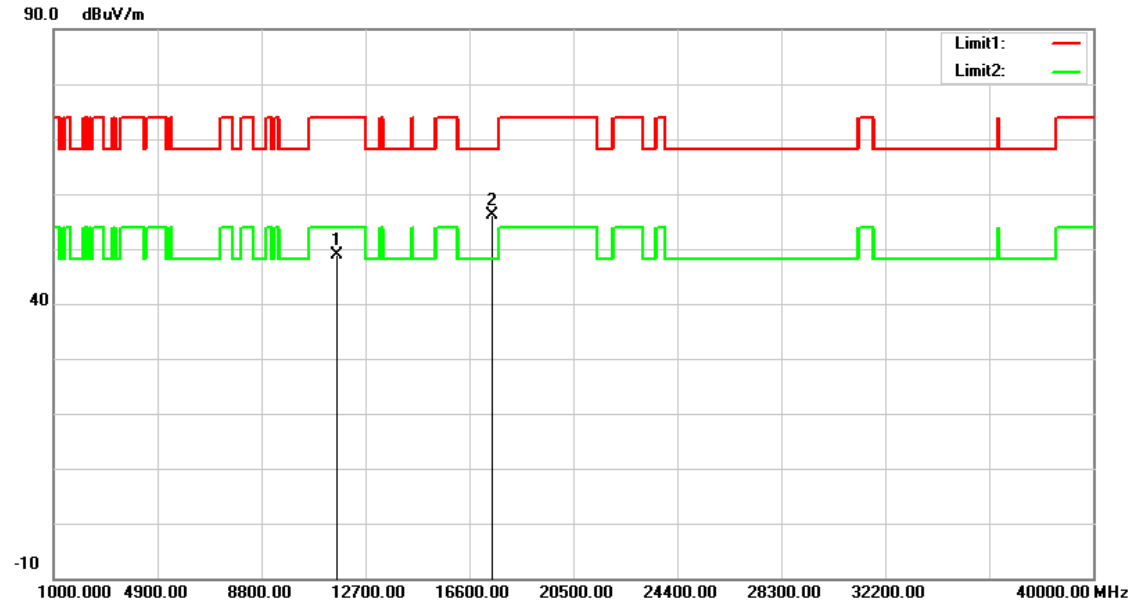


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.25	14.74	48.99	74.00	-25.01	peak
2	17475.000	35.23	20.95	56.18	68.20	-12.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

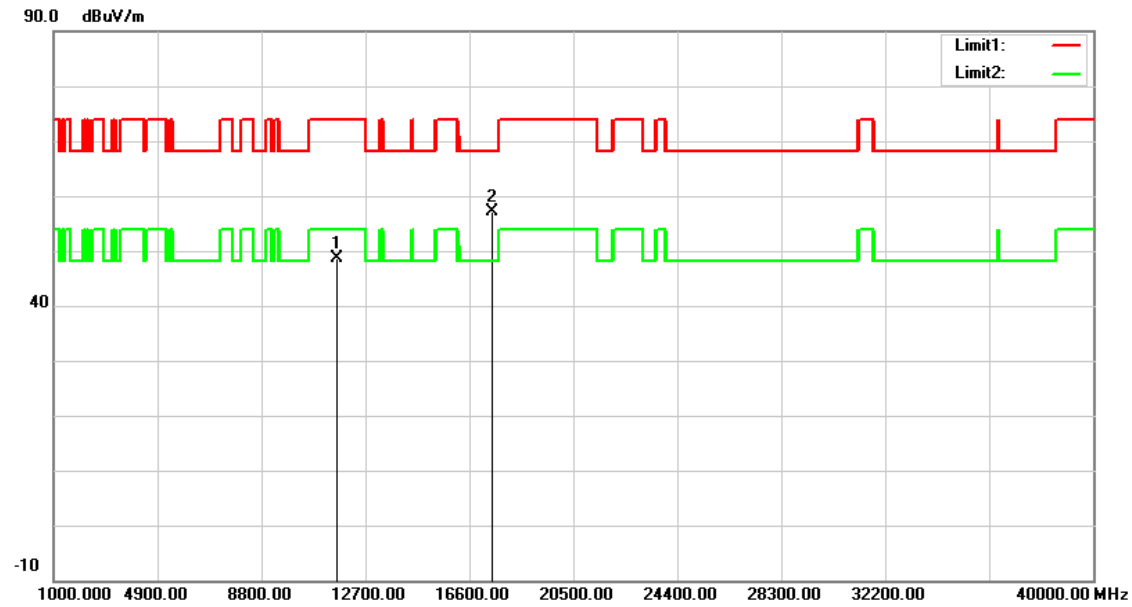


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.99	14.74	48.73	74.00	-25.27	peak
2	17475.000	36.26	20.95	57.21	68.20	-10.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

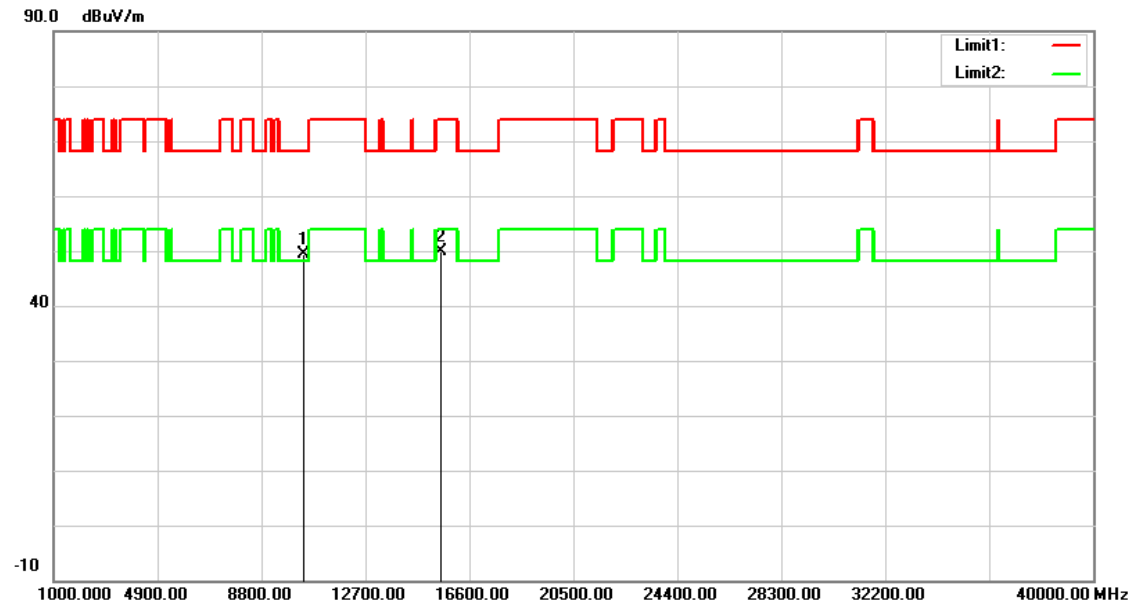


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.84	13.47	49.31	68.20	-18.89	peak
2	15540.000	34.08	15.74	49.82	74.00	-24.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

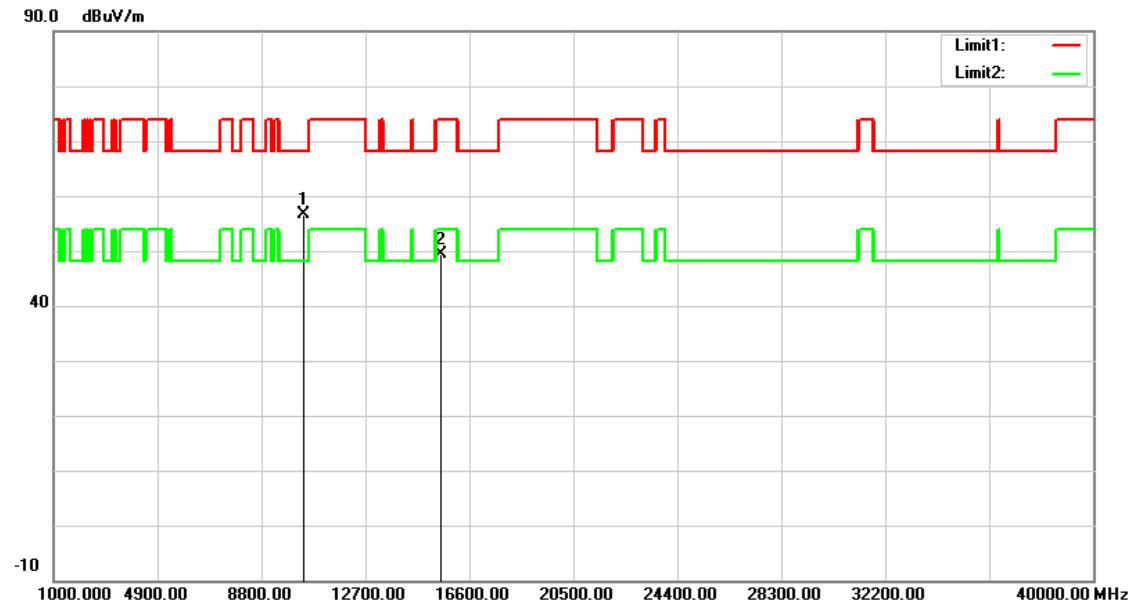


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	43.14	13.47	56.61	68.20	-11.59	peak
2	15540.000	33.65	15.74	49.39	74.00	-24.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

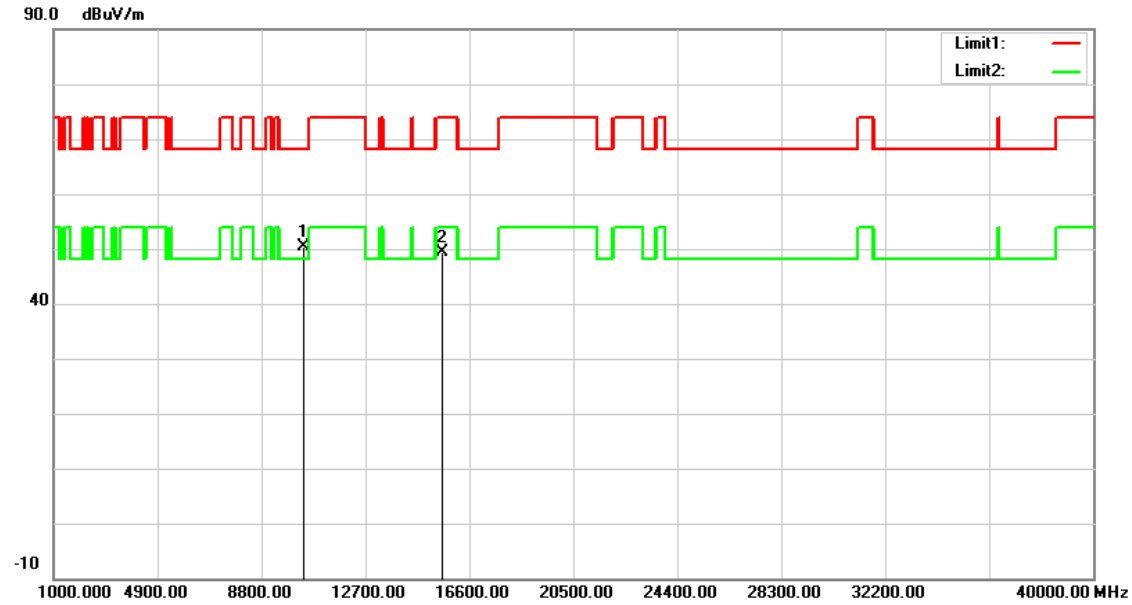


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.88	13.61	50.49	68.20	-17.71	peak
2	15600.000	33.87	15.59	49.46	74.00	-24.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

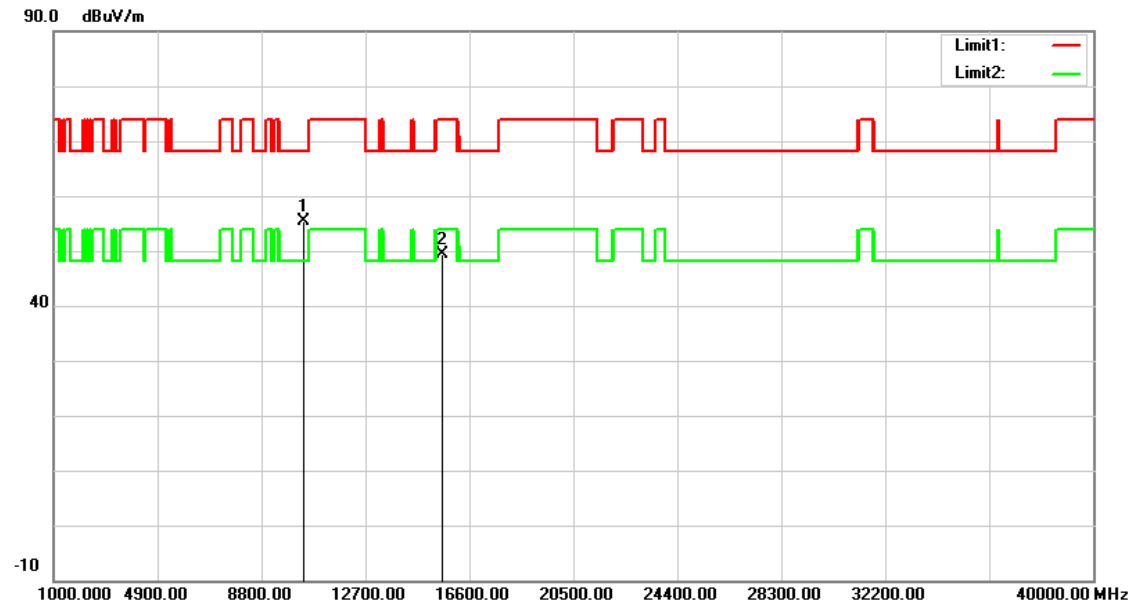


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	41.88	13.61	55.49	68.20	-12.71	peak
2	15600.000	33.85	15.59	49.44	74.00	-24.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

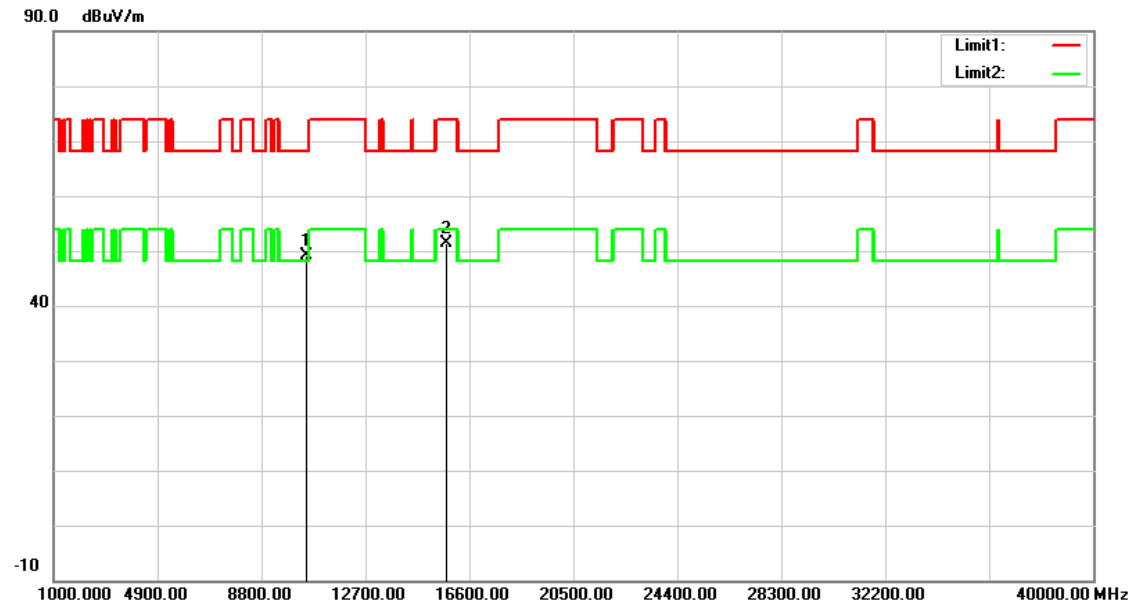


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.20	13.90	49.10	68.20	-19.10	peak
2	15720.000	36.15	15.30	51.45	74.00	-22.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

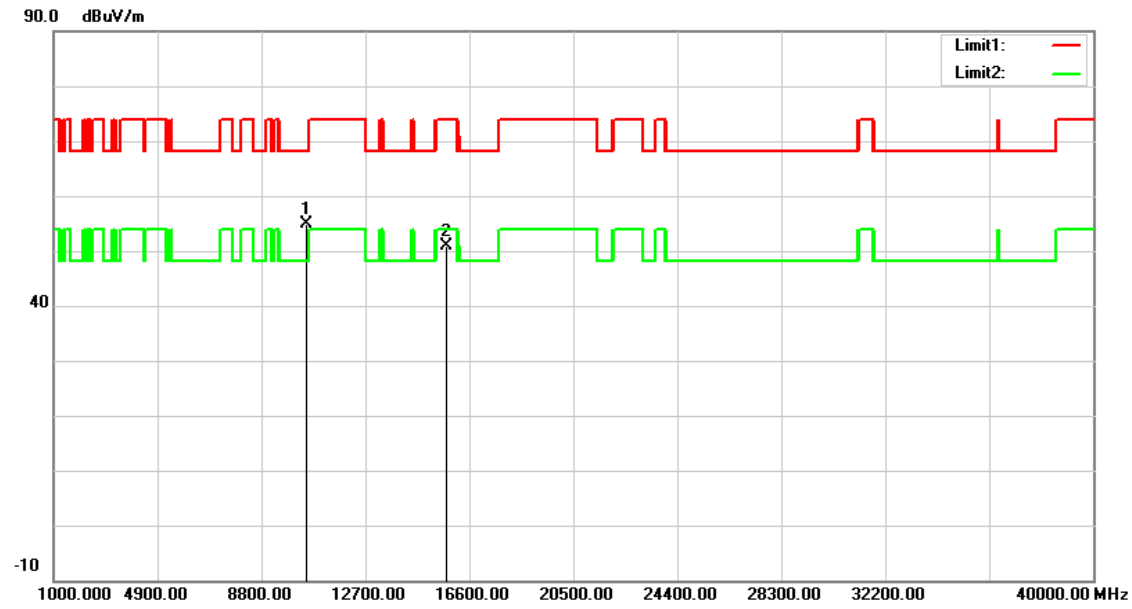


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	40.91	13.90	54.81	68.20	-13.39	peak
2	15720.000	35.70	15.30	51.00	74.00	-23.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

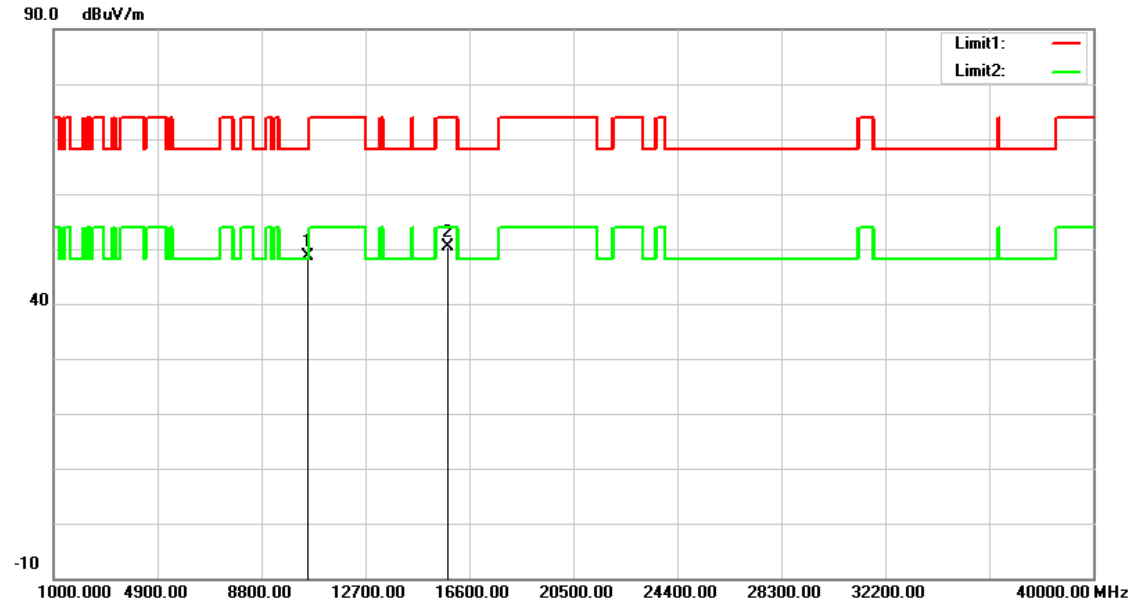


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.57	13.99	48.56	68.20	-19.64	peak
2	15780.000	35.12	15.18	50.30	74.00	-23.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

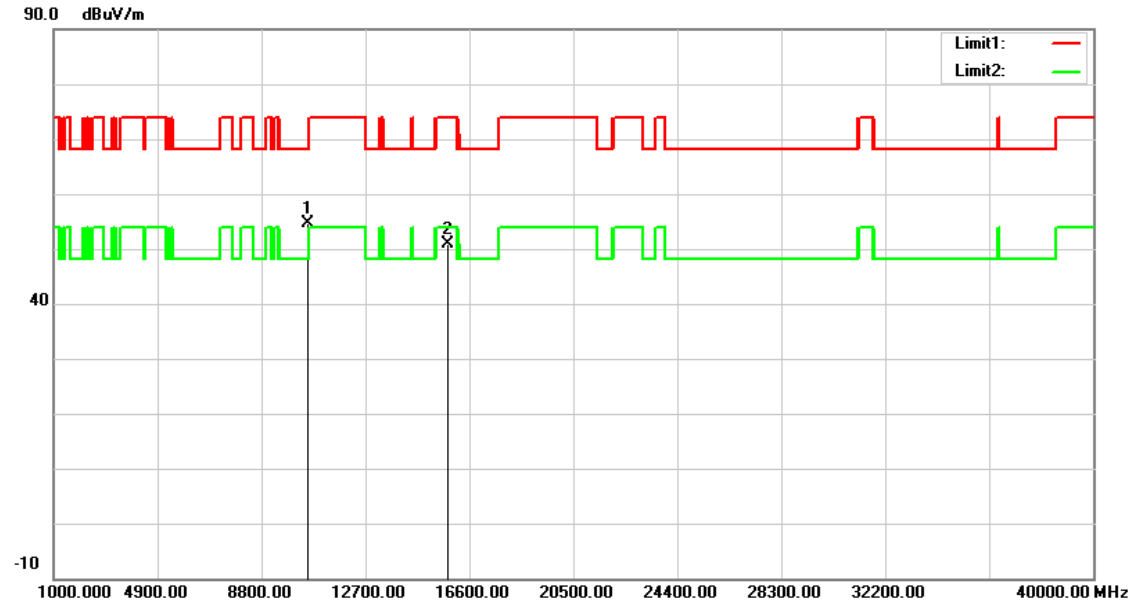


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	40.70	13.99	54.69	68.20	-13.51	peak
2	15780.000	35.70	15.18	50.88	74.00	-23.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

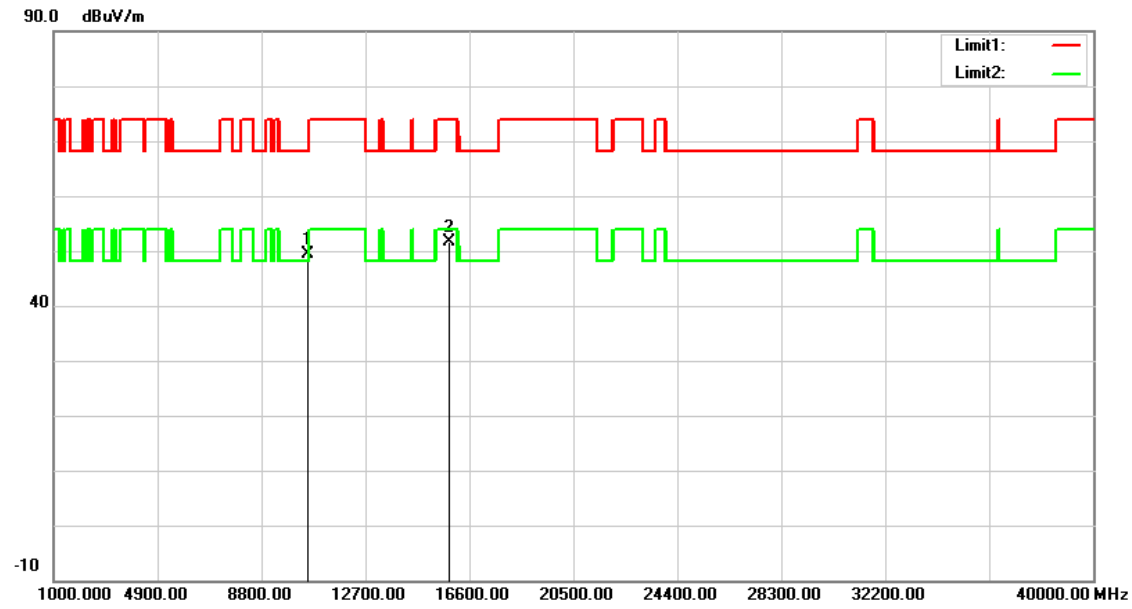


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.26	14.03	49.29	68.20	-18.91	peak
2	15840.000	36.50	15.04	51.54	74.00	-22.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

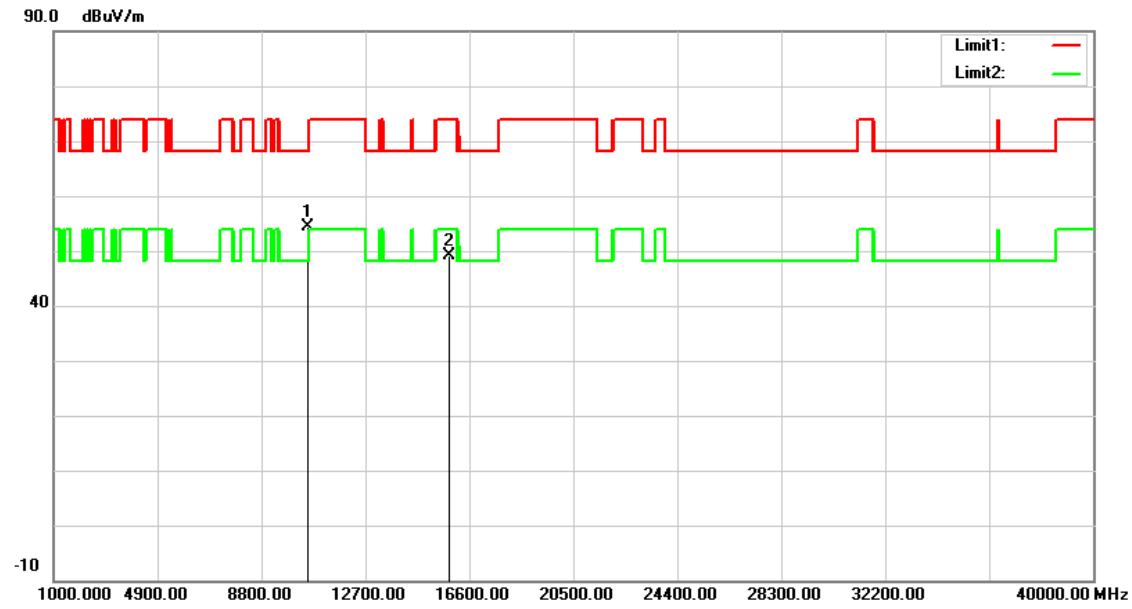


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	40.31	14.03	54.34	68.20	-13.86	peak
2	15840.000	34.21	15.04	49.25	74.00	-24.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

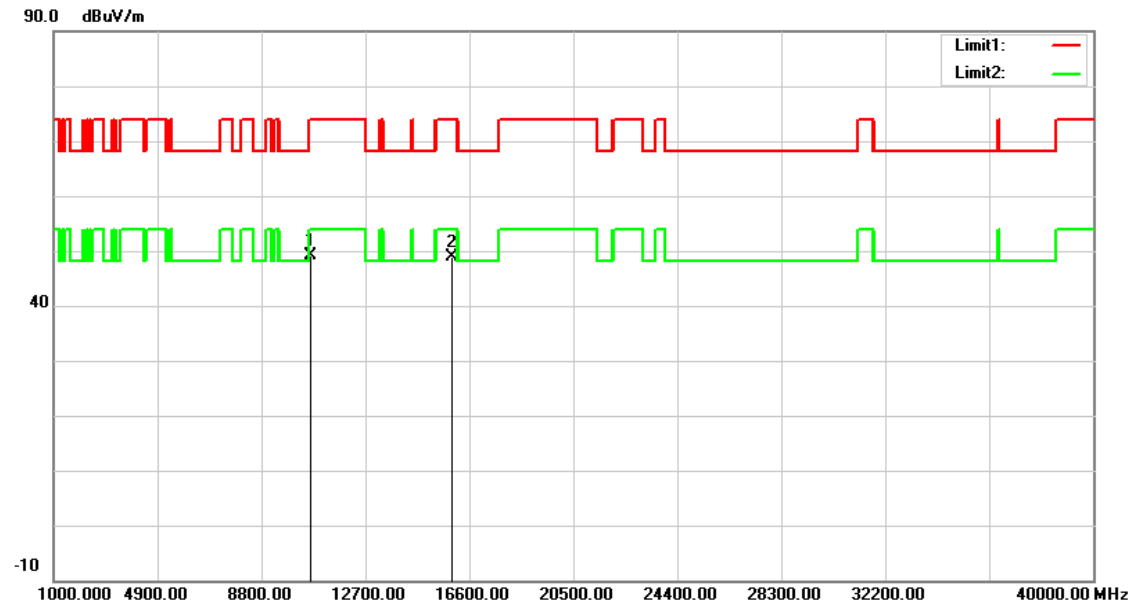


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.13	14.12	49.25	74.00	-24.75	peak
2	15960.000	34.08	14.75	48.83	74.00	-25.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

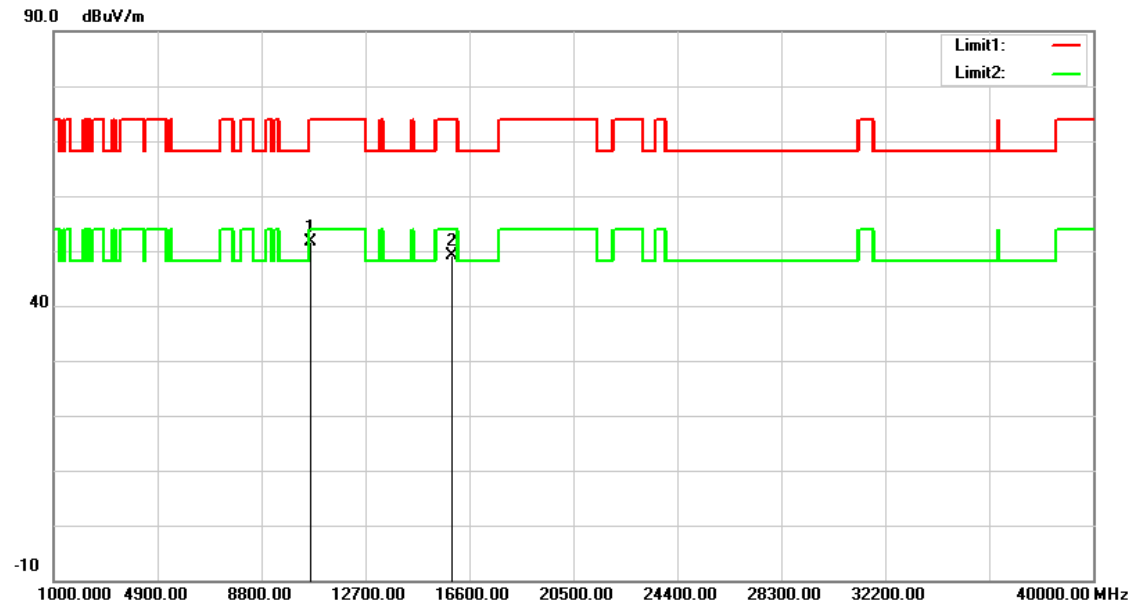


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	37.60	14.12	51.72	74.00	-22.28	peak
2	15960.000	34.39	14.75	49.14	74.00	-24.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

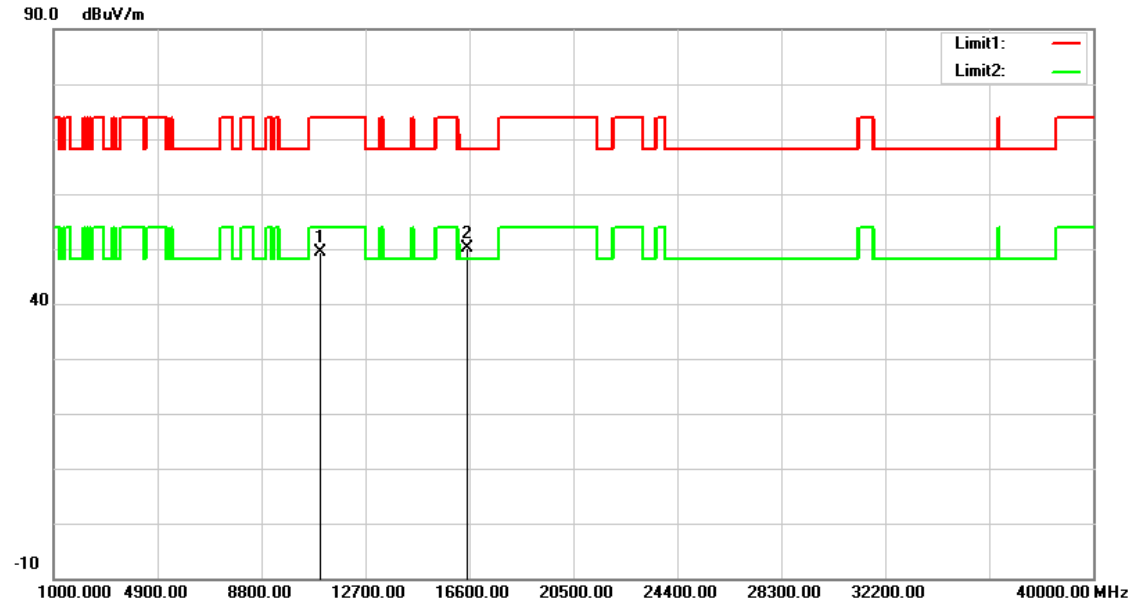


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.81	14.53	49.34	74.00	-24.66	peak
2	16500.000	34.45	15.80	50.25	68.20	-17.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

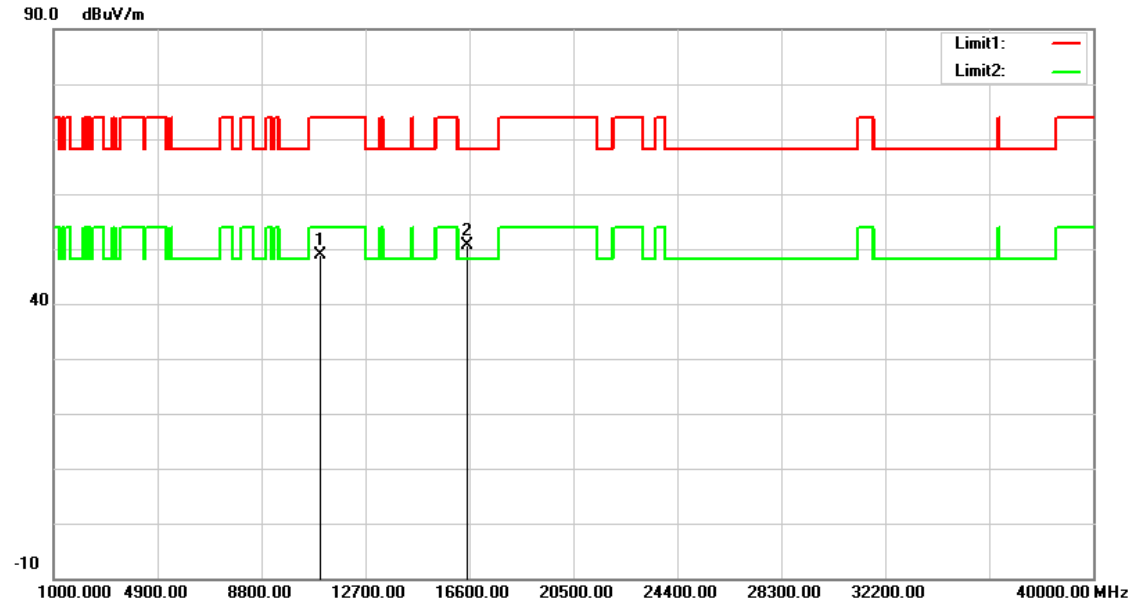


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.35	14.53	48.88	74.00	-25.12	peak
2	16500.000	34.84	15.80	50.64	68.20	-17.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

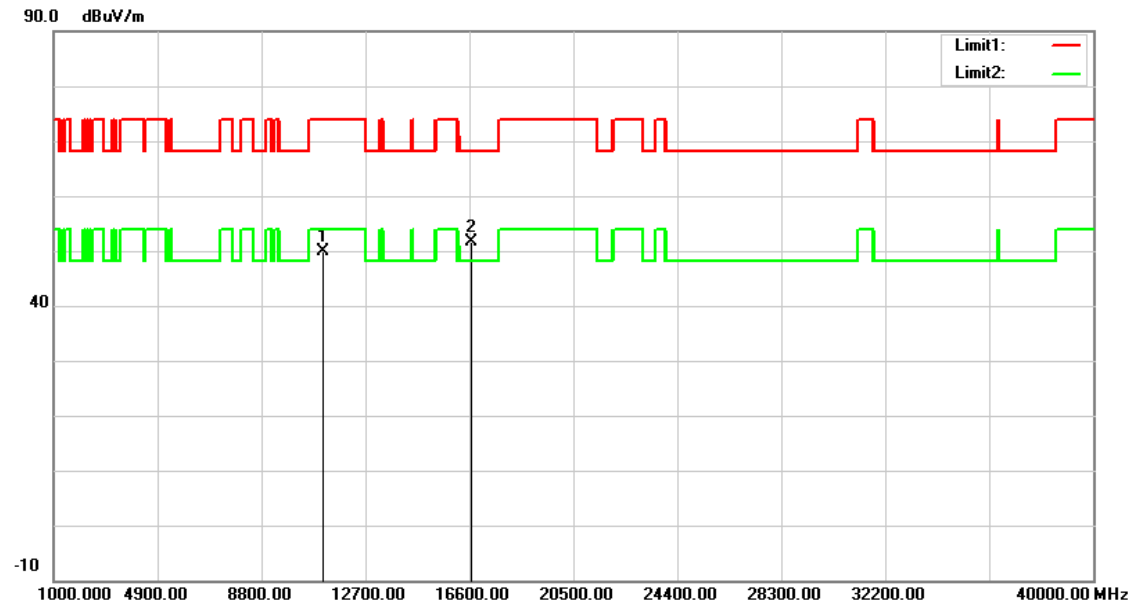


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.14	14.66	49.80	74.00	-24.20	peak
2	16680.000	34.77	16.79	51.56	68.20	-16.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

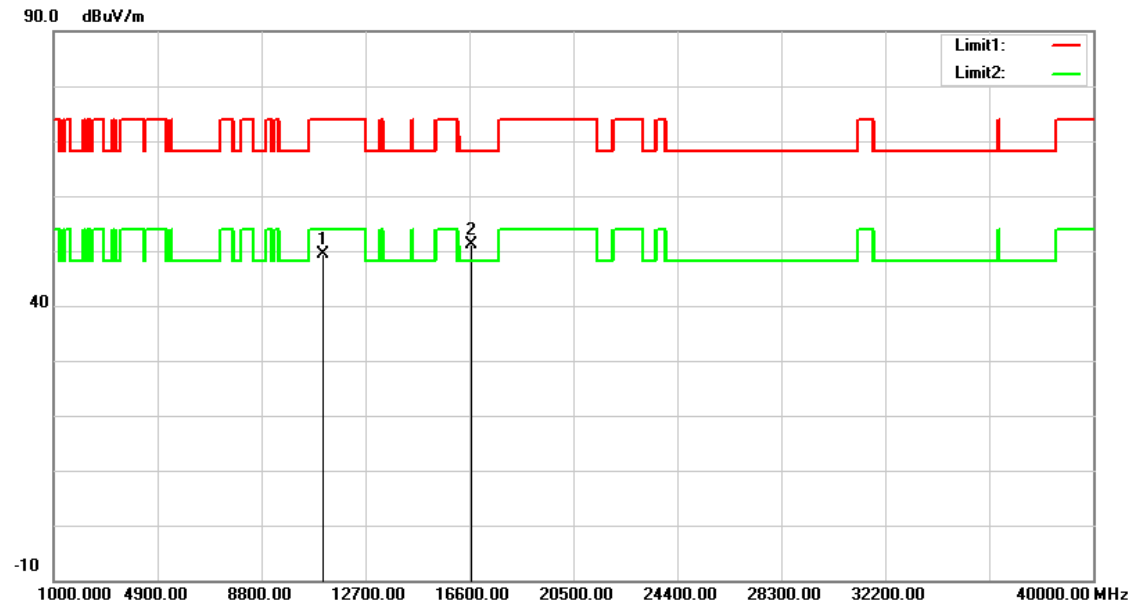


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.69	14.66	49.35	74.00	-24.65	peak
2	16680.000	34.41	16.79	51.20	68.20	-17.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

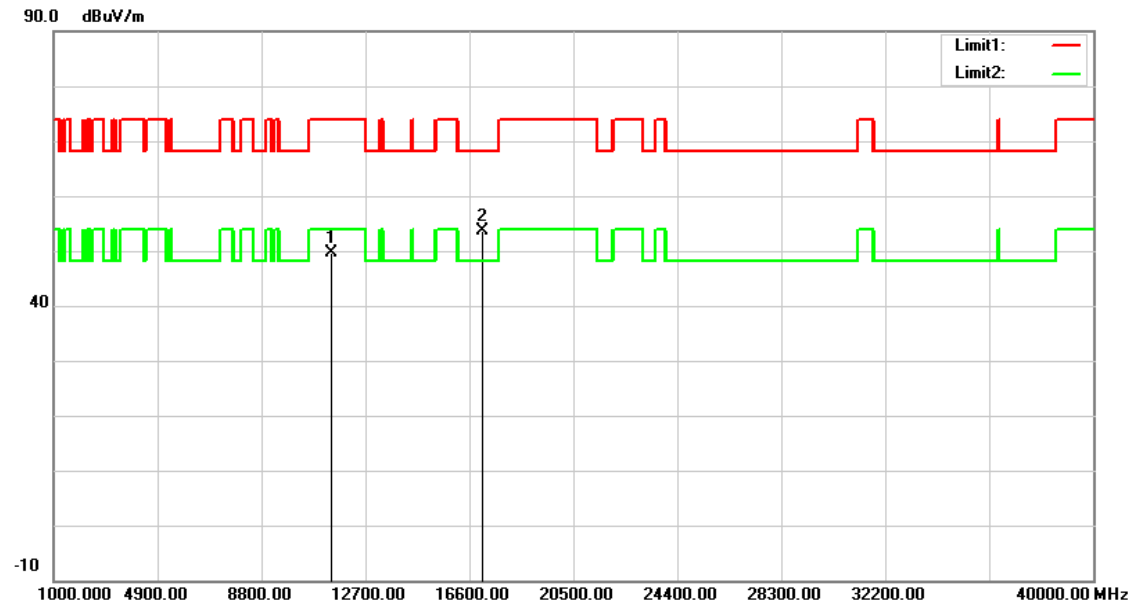


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.73	14.93	49.66	74.00	-24.34	peak
2	17100.000	34.60	19.06	53.66	68.20	-14.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

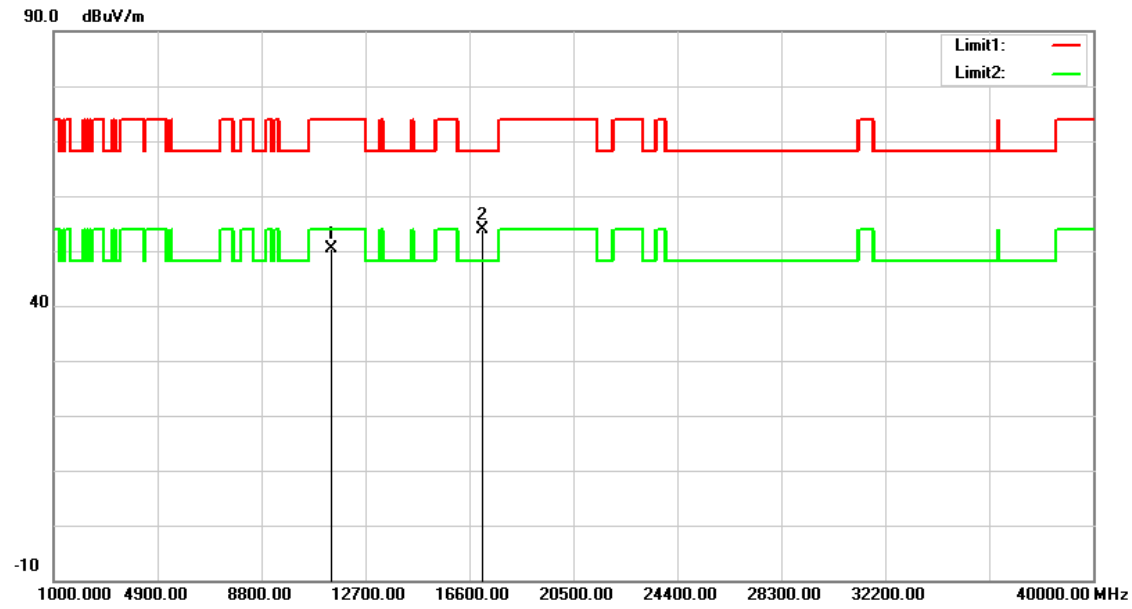


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.43	14.93	50.36	74.00	-23.64	peak
2	17100.000	34.93	19.06	53.99	68.20	-14.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

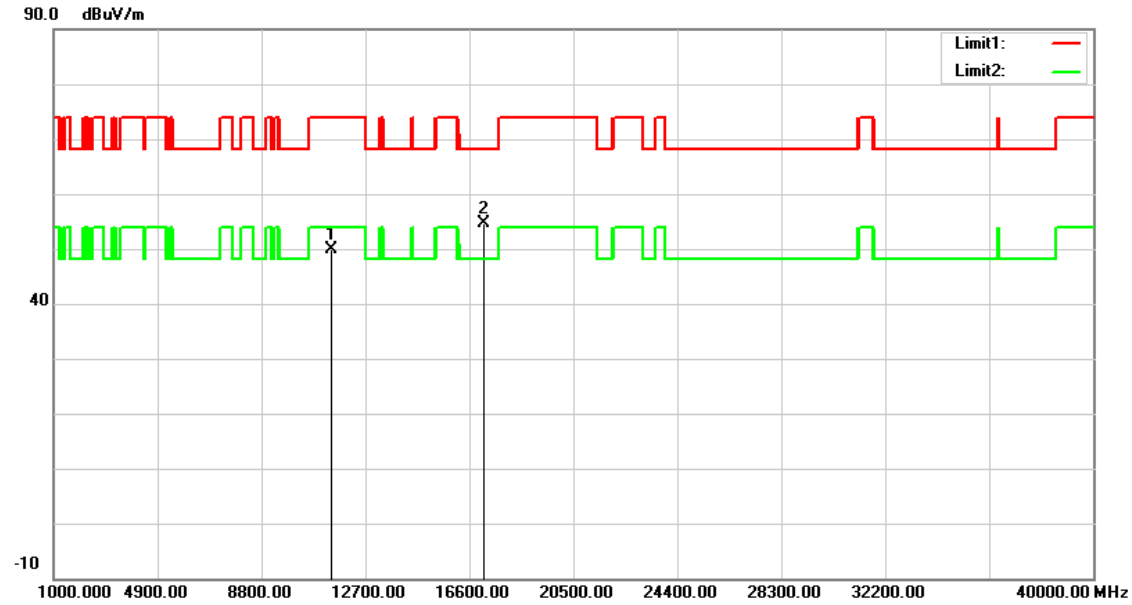


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.83	14.97	49.80	74.00	-24.20	peak
2	17160.000	35.28	19.36	54.64	68.20	-13.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

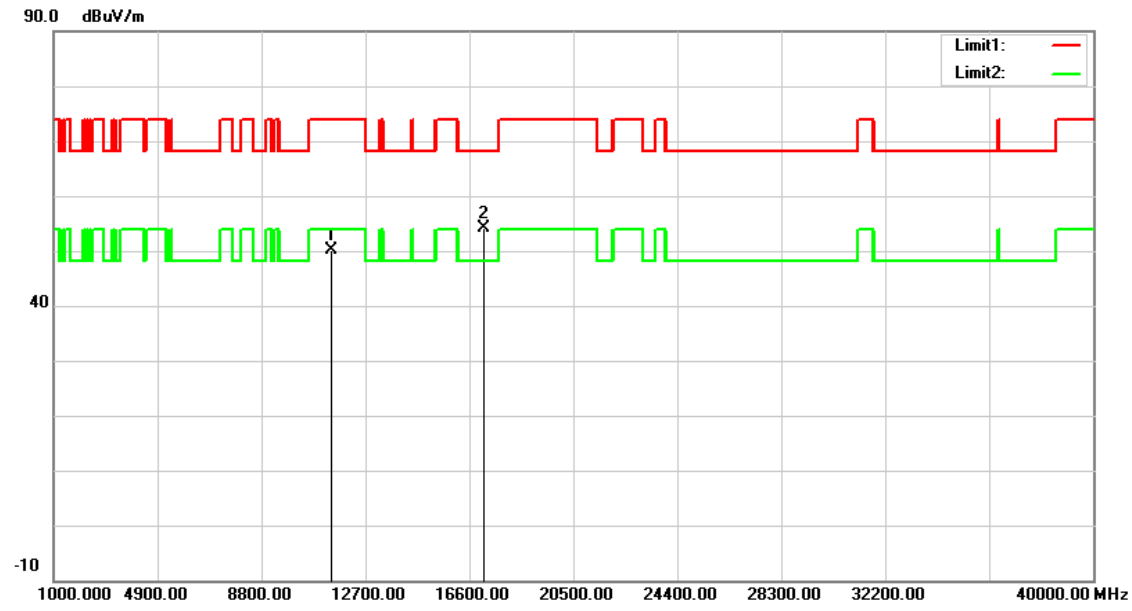


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	35.14	14.97	50.11	74.00	-23.89	peak
2	17160.000	34.88	19.36	54.24	68.20	-13.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

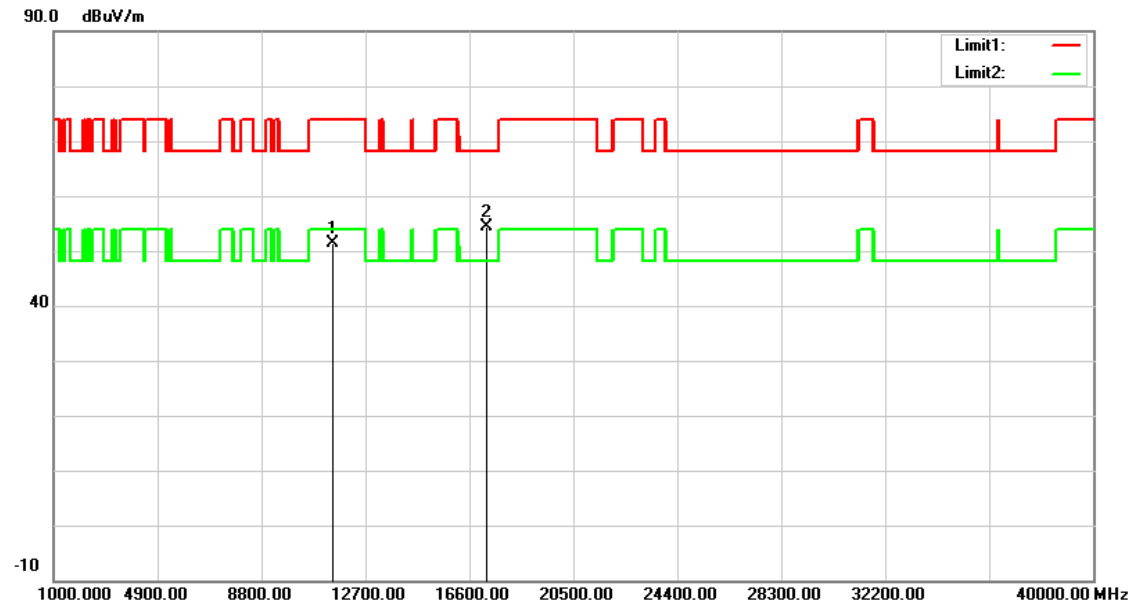


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.44	15.02	51.46	74.00	-22.54	peak
2	17235.000	34.60	19.74	54.34	68.20	-13.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

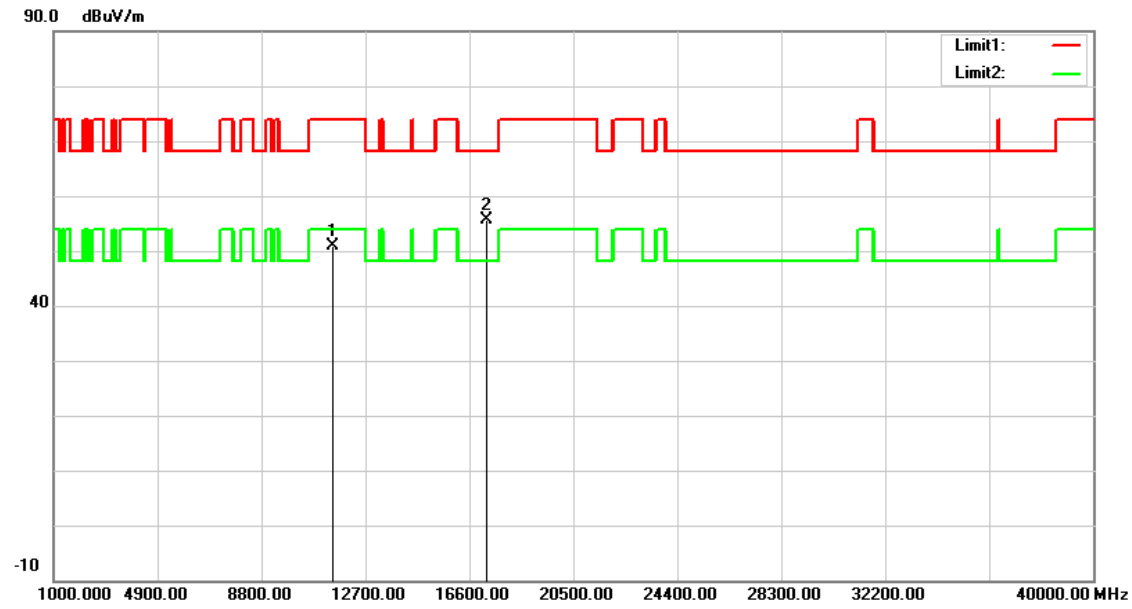


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.92	15.02	50.94	74.00	-23.06	peak
2	17235.000	36.01	19.74	55.75	68.20	-12.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

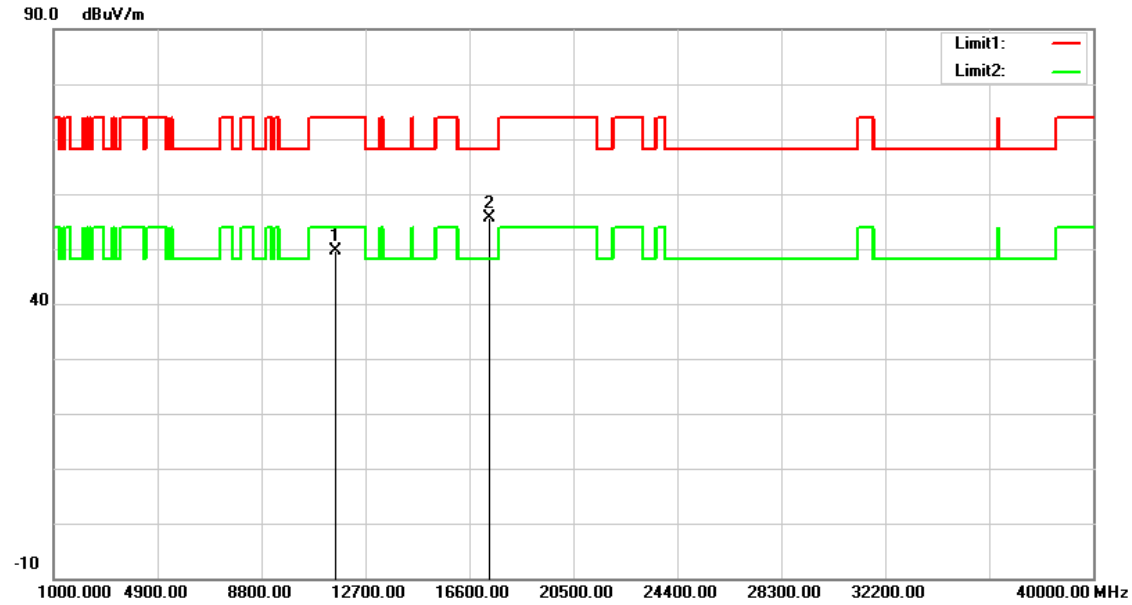


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.78	14.89	49.67	74.00	-24.33	peak
2	17355.000	35.23	20.34	55.57	68.20	-12.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

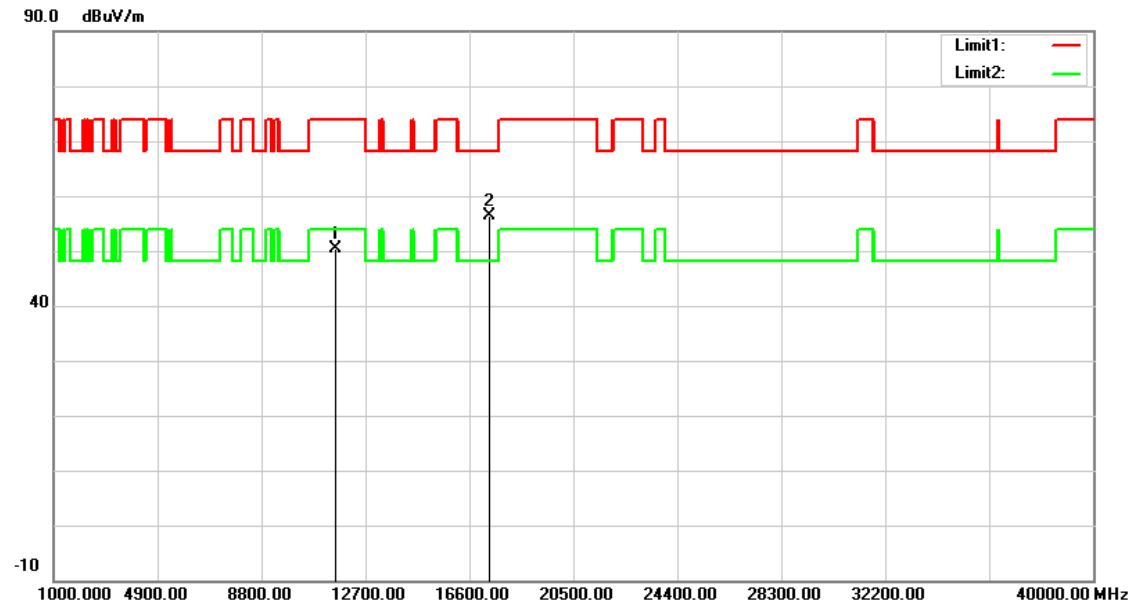


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.60	14.89	50.49	74.00	-23.51	peak
2	17355.000	36.15	20.34	56.49	68.20	-11.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

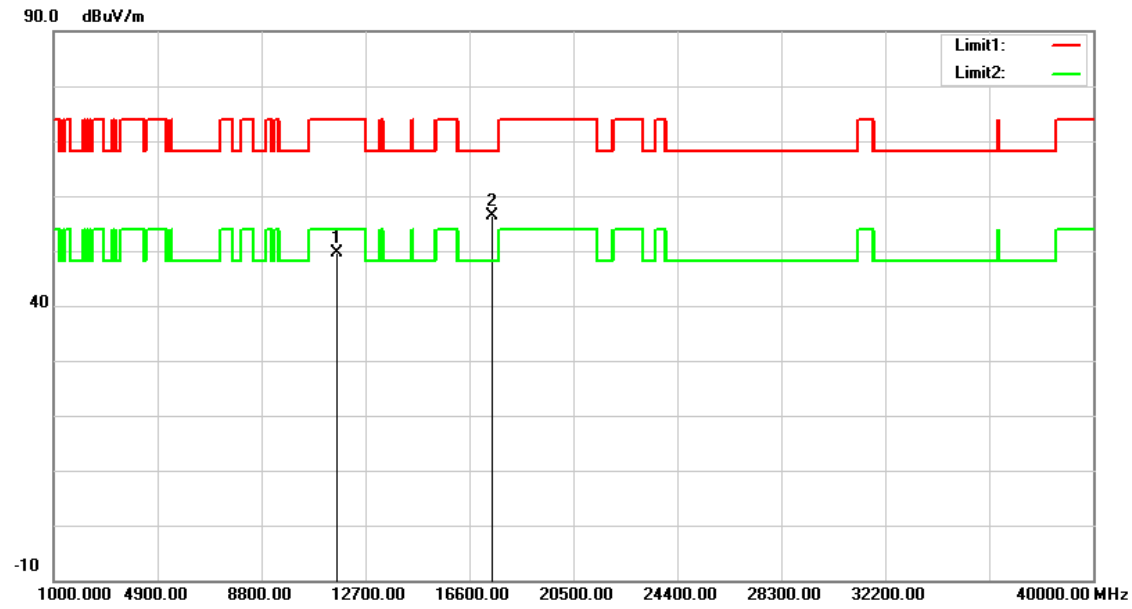


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.90	14.74	49.64	74.00	-24.36	peak
2	17475.000	35.44	20.95	56.39	68.20	-11.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

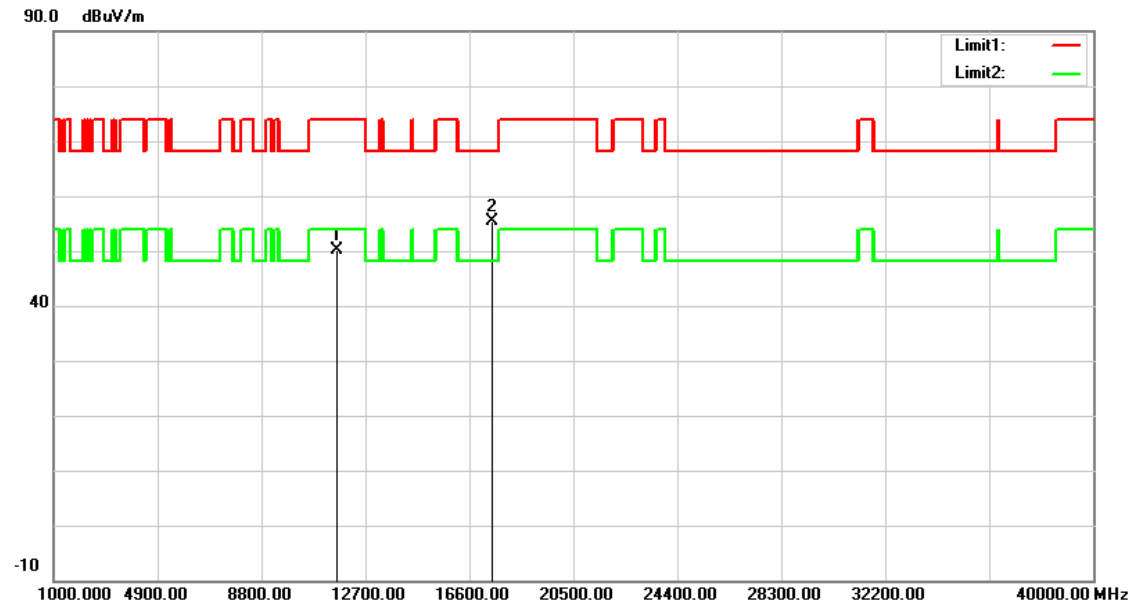


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.49	14.74	50.23	74.00	-23.77	peak
2	17475.000	34.49	20.95	55.44	68.20	-12.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

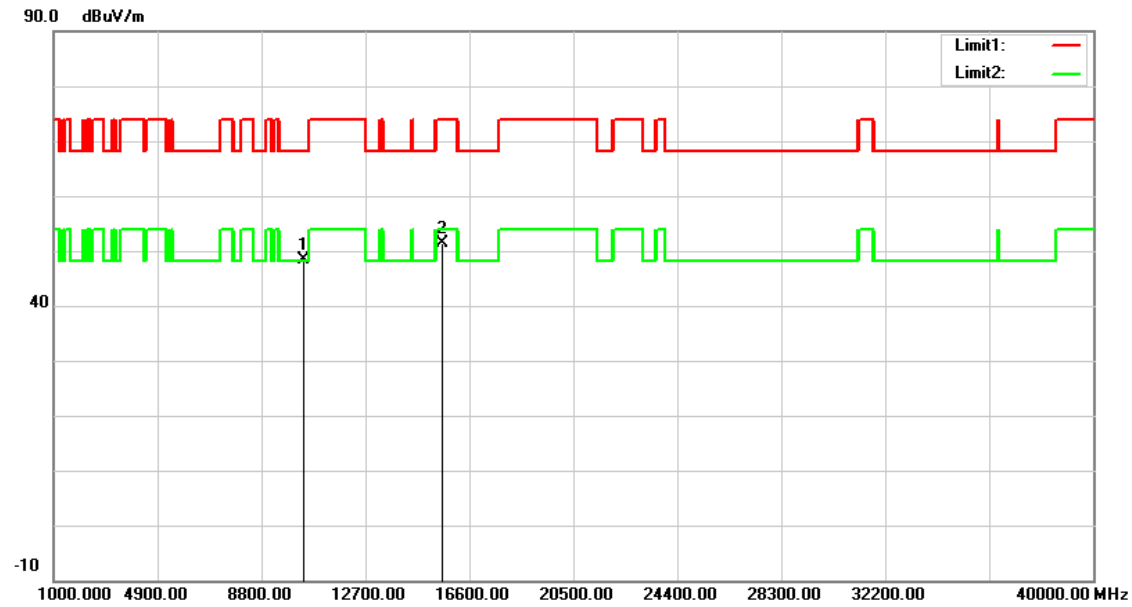


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.72	13.54	48.26	68.20	-19.94	peak
2	15570.000	35.72	15.66	51.38	74.00	-22.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

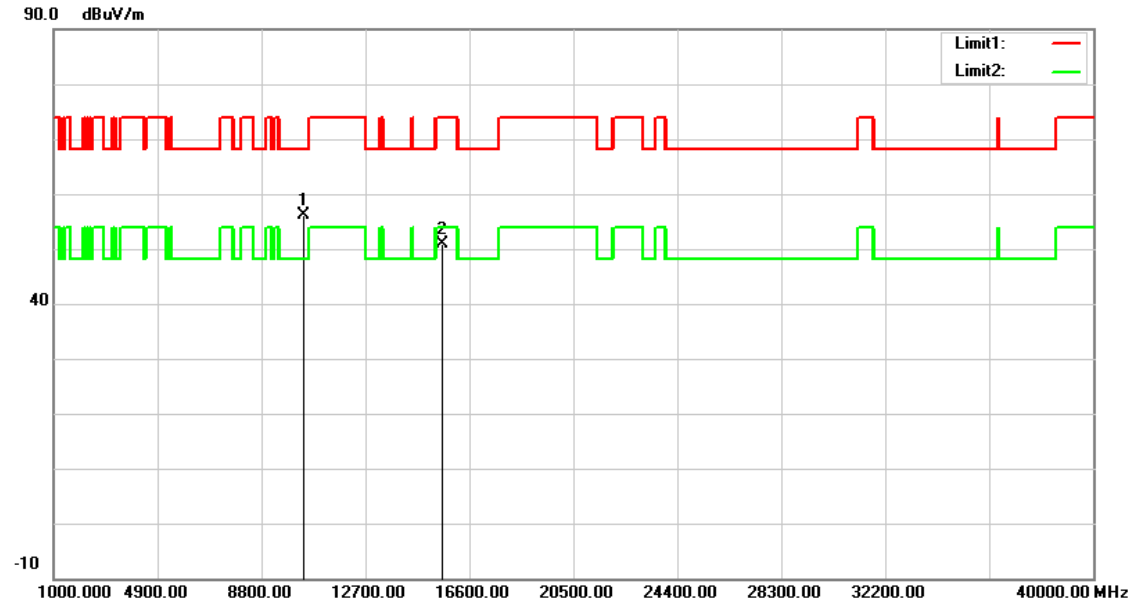


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	42.71	13.54	56.25	68.20	-11.95	peak
2	15570.000	35.15	15.66	50.81	74.00	-23.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

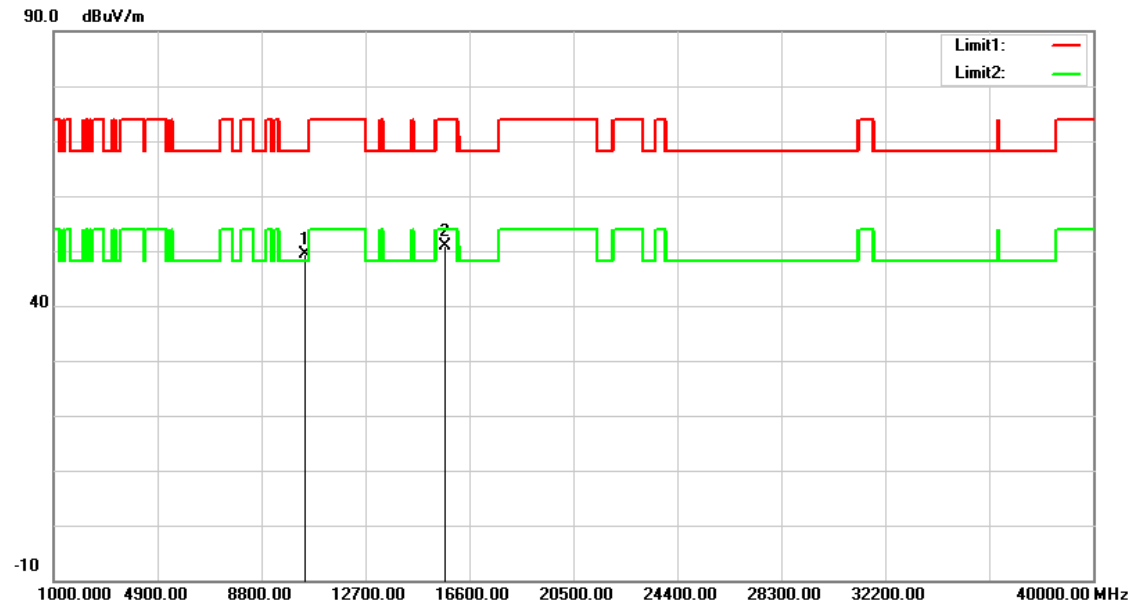


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.52	13.82	49.34	68.20	-18.86	peak
2	15690.000	35.46	15.38	50.84	74.00	-23.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

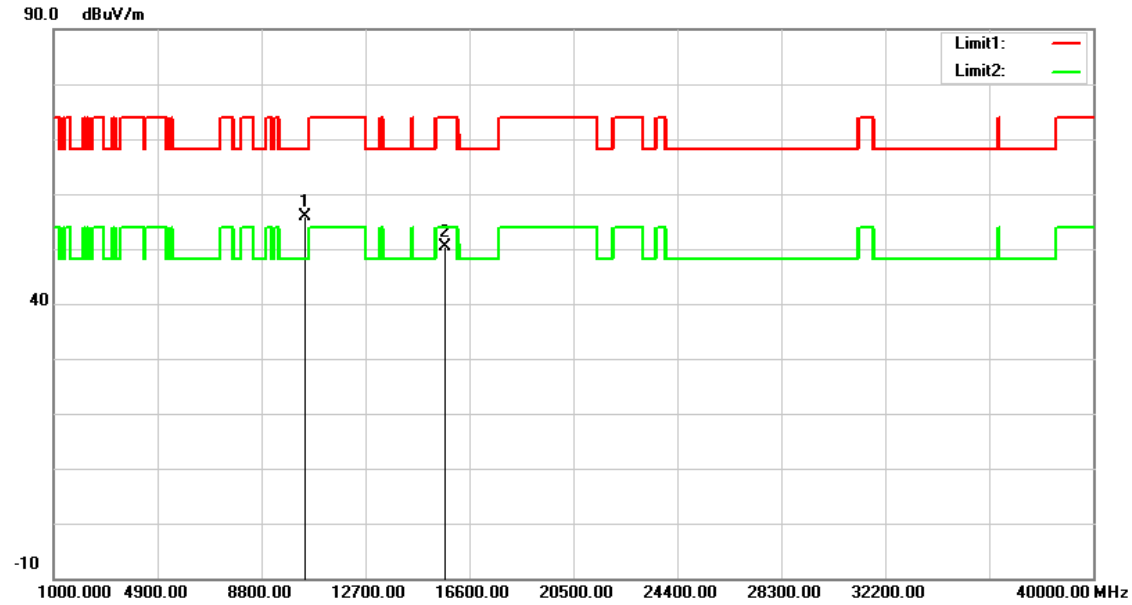


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	42.02	13.82	55.84	68.20	-12.36	peak
2	15690.000	34.94	15.38	50.32	74.00	-23.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

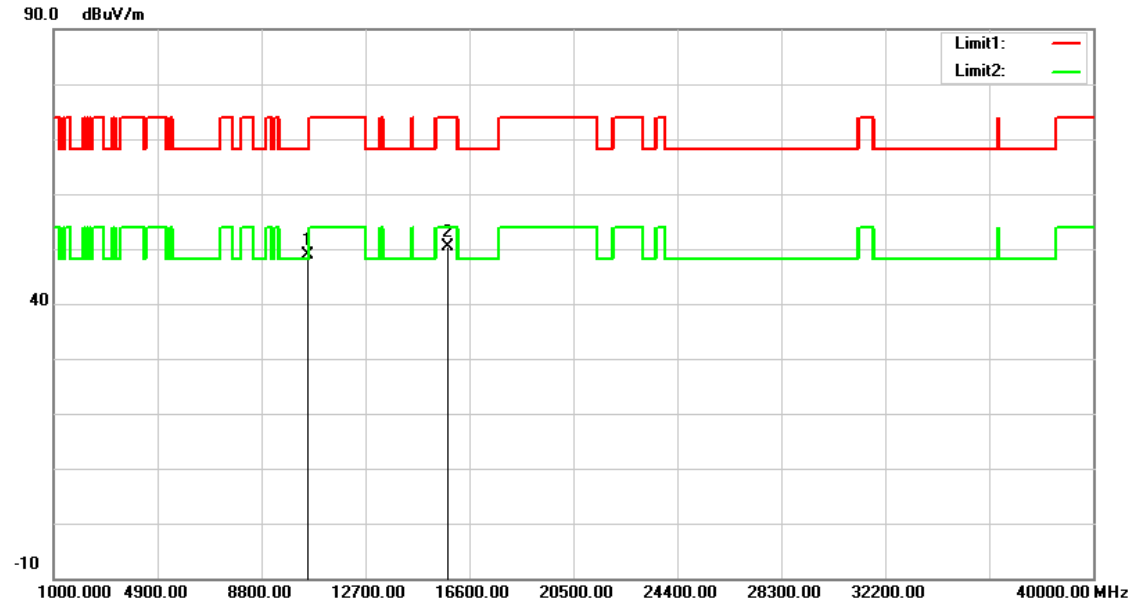


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	34.97	14.01	48.98	68.20	-19.22	peak
2	15810.000	35.25	15.10	50.35	74.00	-23.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

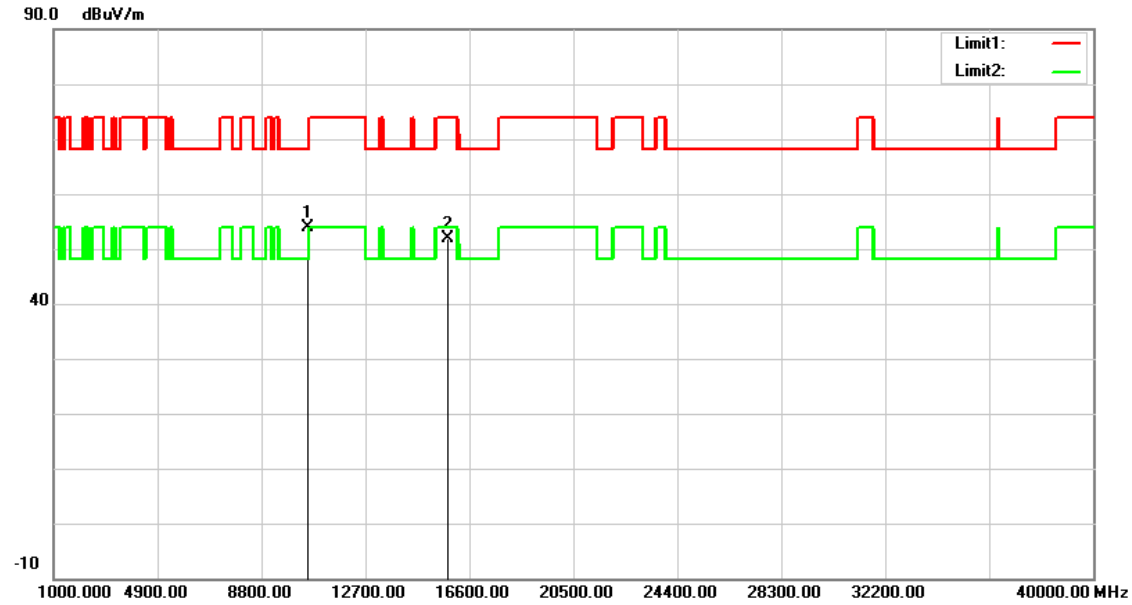


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	39.95	14.01	53.96	68.20	-14.24	peak
2	15810.000	36.74	15.10	51.84	74.00	-22.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

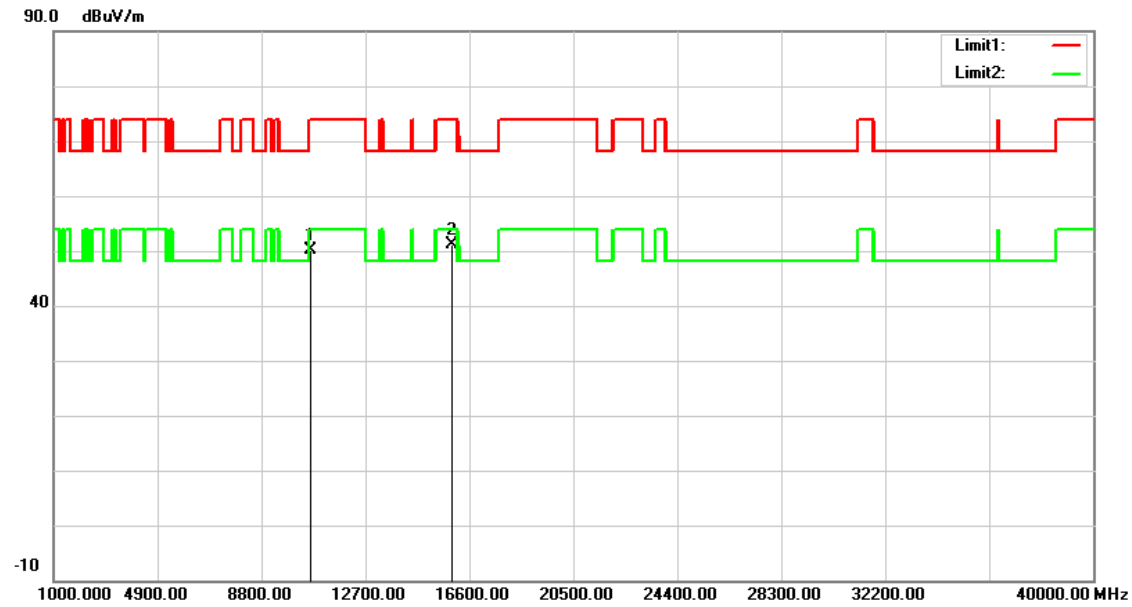


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.93	14.10	50.03	74.00	-23.97	peak
2	15930.000	36.37	14.82	51.19	74.00	-22.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

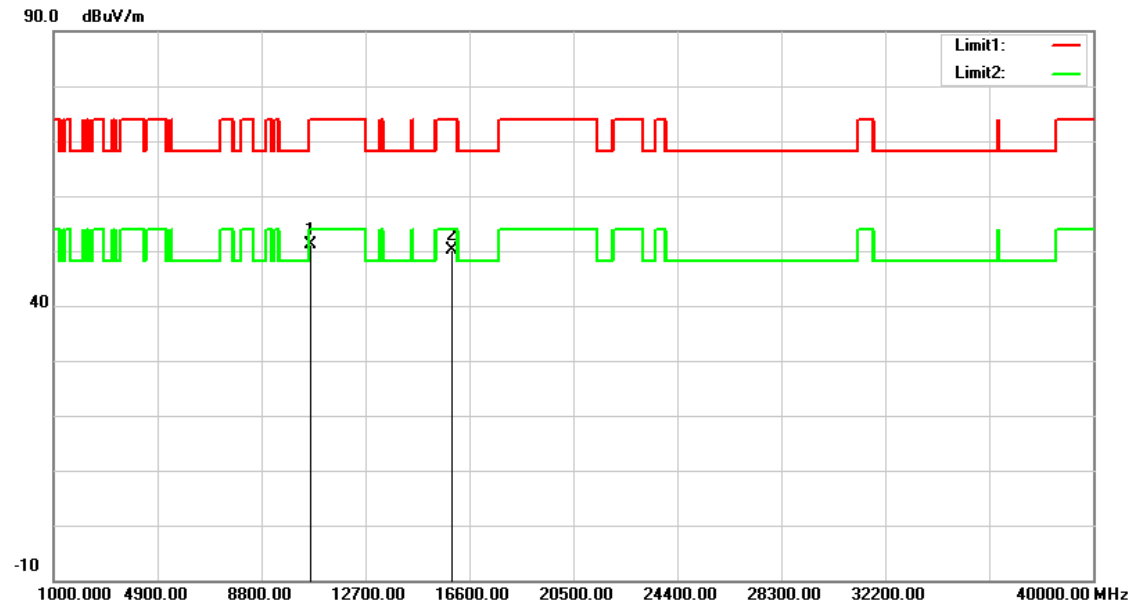


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	37.13	14.10	51.23	74.00	-22.77	peak
2	15930.000	35.41	14.82	50.23	74.00	-23.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

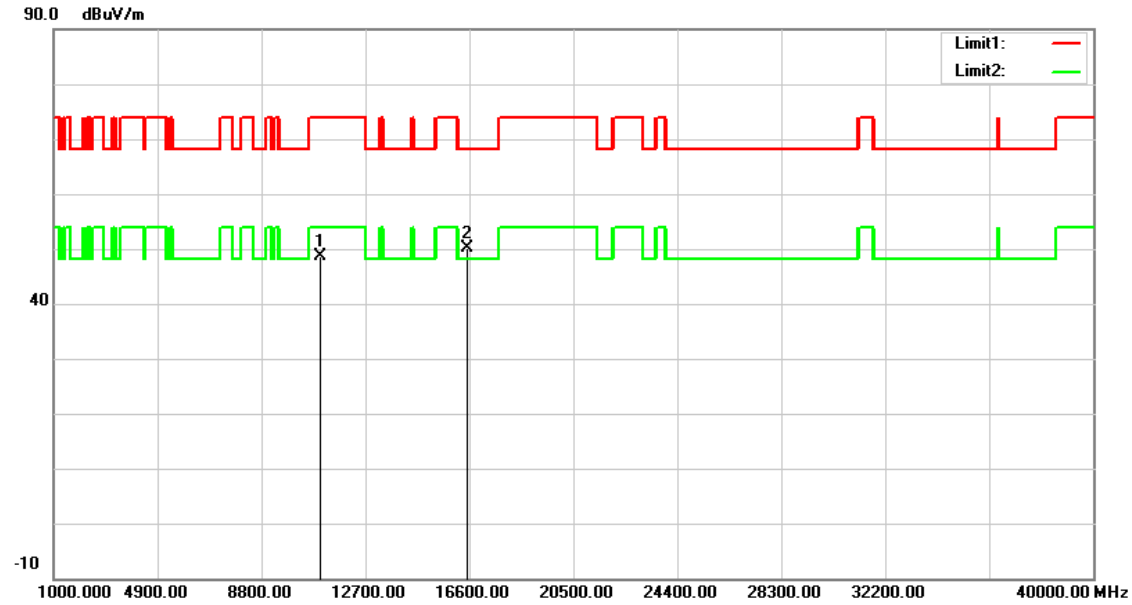


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.15	14.56	48.71	74.00	-25.29	peak
2	16530.000	34.21	15.96	50.17	68.20	-18.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

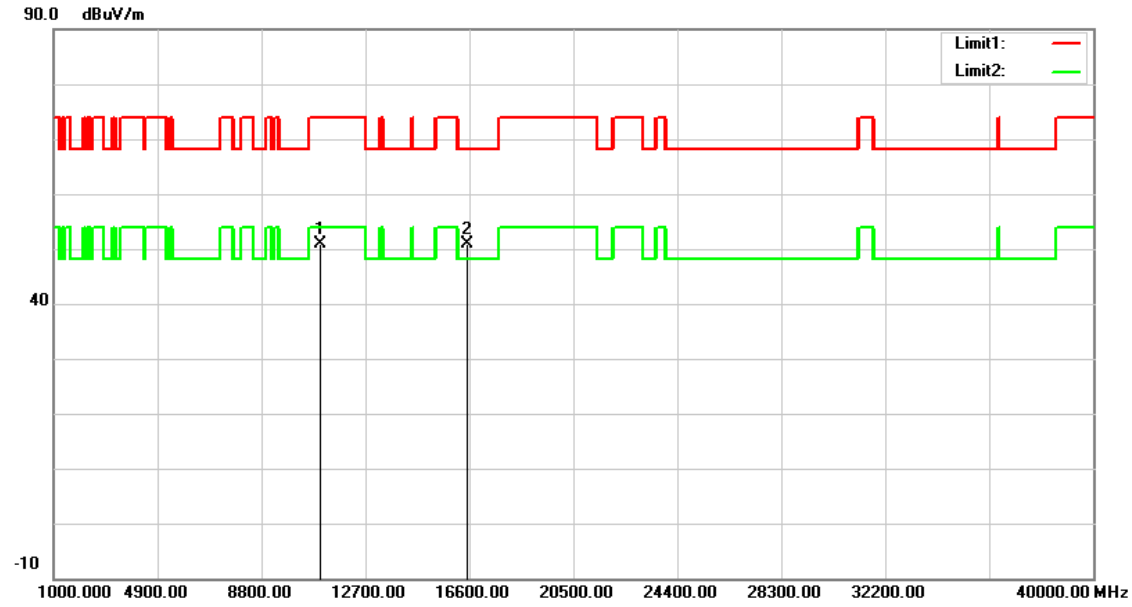


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	36.31	14.56	50.87	74.00	-23.13	peak
2	16530.000	35.02	15.96	50.98	68.20	-17.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

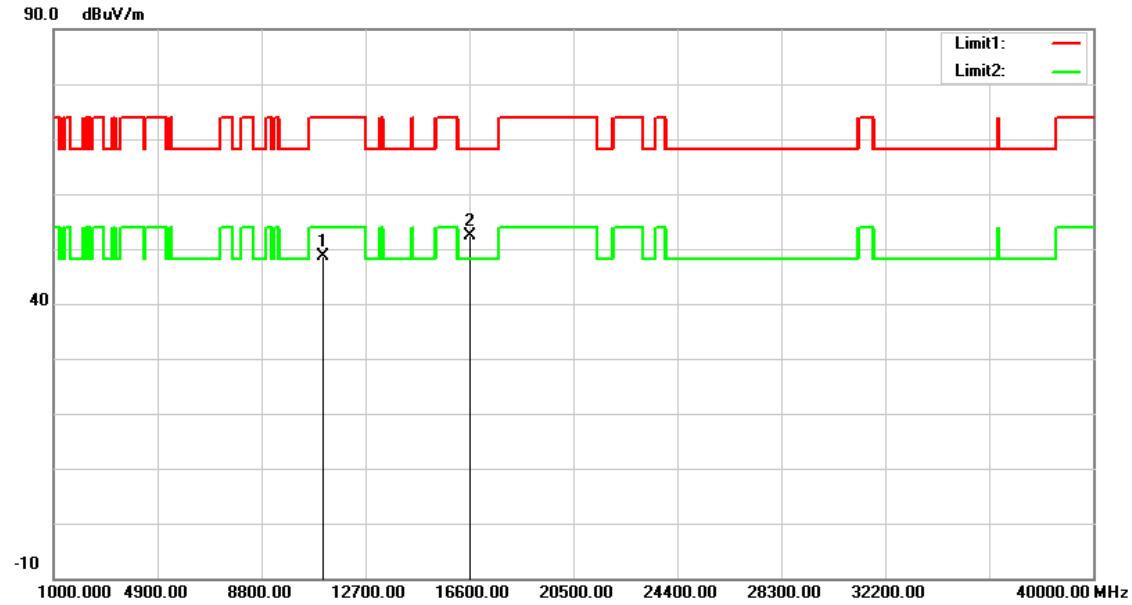


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.99	14.63	48.62	74.00	-25.38	peak
2	16650.000	35.69	16.63	52.32	68.20	-15.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

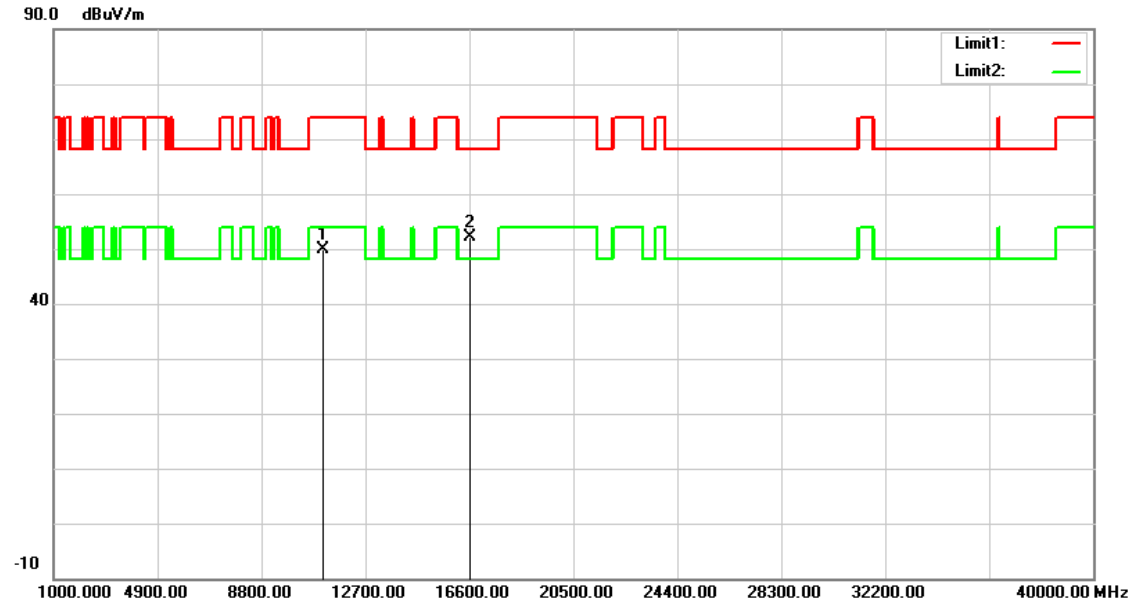


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.25	14.63	49.88	74.00	-24.12	peak
2	16650.000	35.62	16.63	52.25	68.20	-15.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

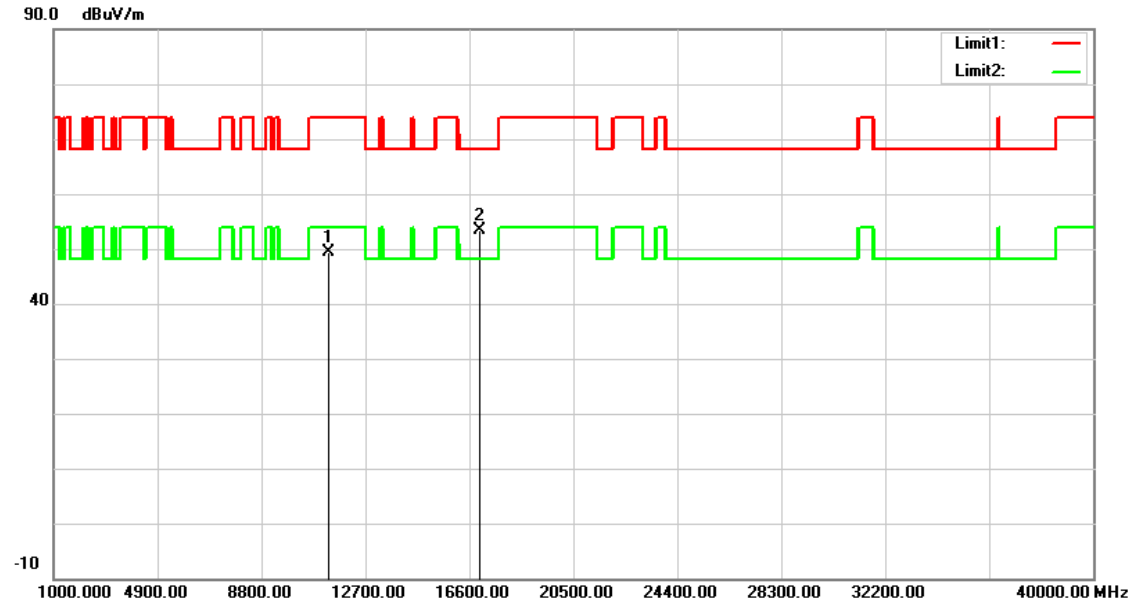


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.47	14.87	49.34	74.00	-24.66	peak
2	17010.000	34.78	18.61	53.39	68.20	-14.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

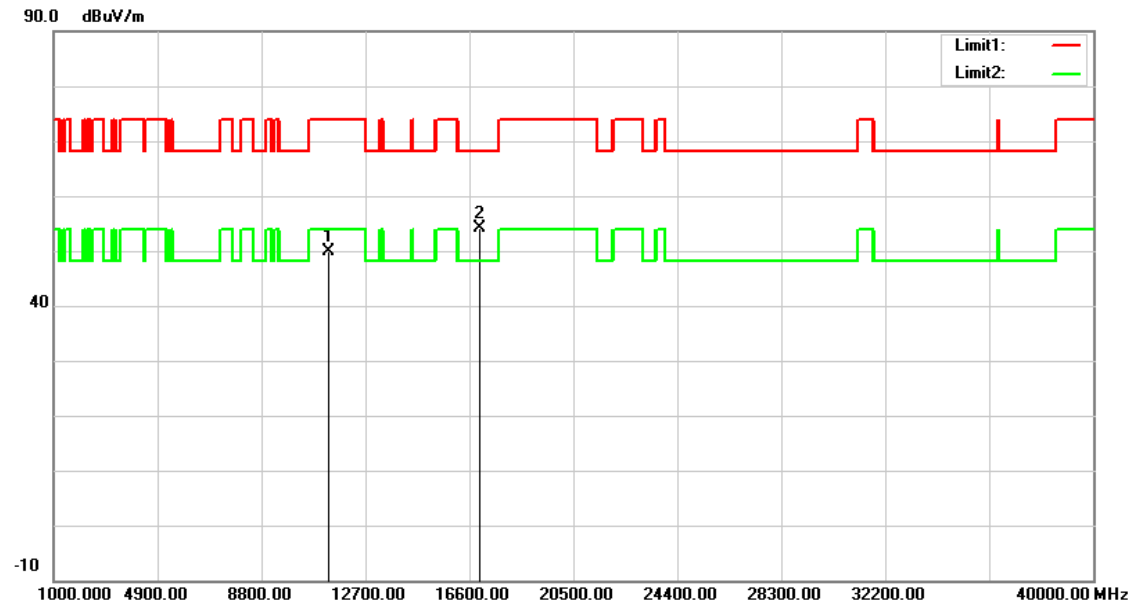


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.09	14.87	49.96	74.00	-24.04	peak
2	17010.000	35.43	18.61	54.04	68.20	-14.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

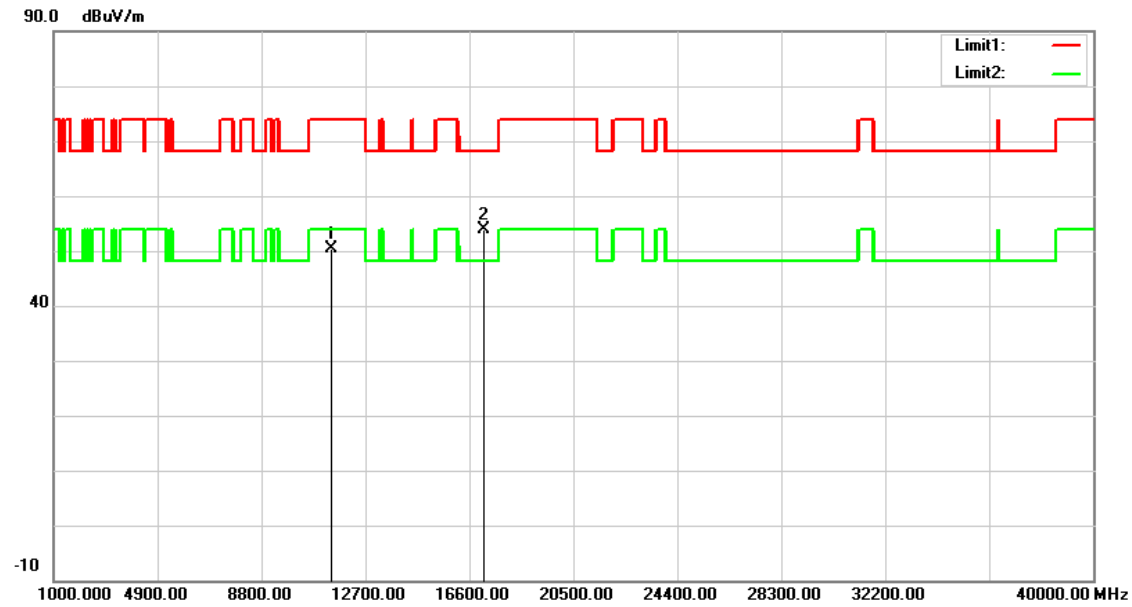


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.46	14.96	50.42	74.00	-23.58	peak
2	17130.000	34.68	19.21	53.89	68.20	-14.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

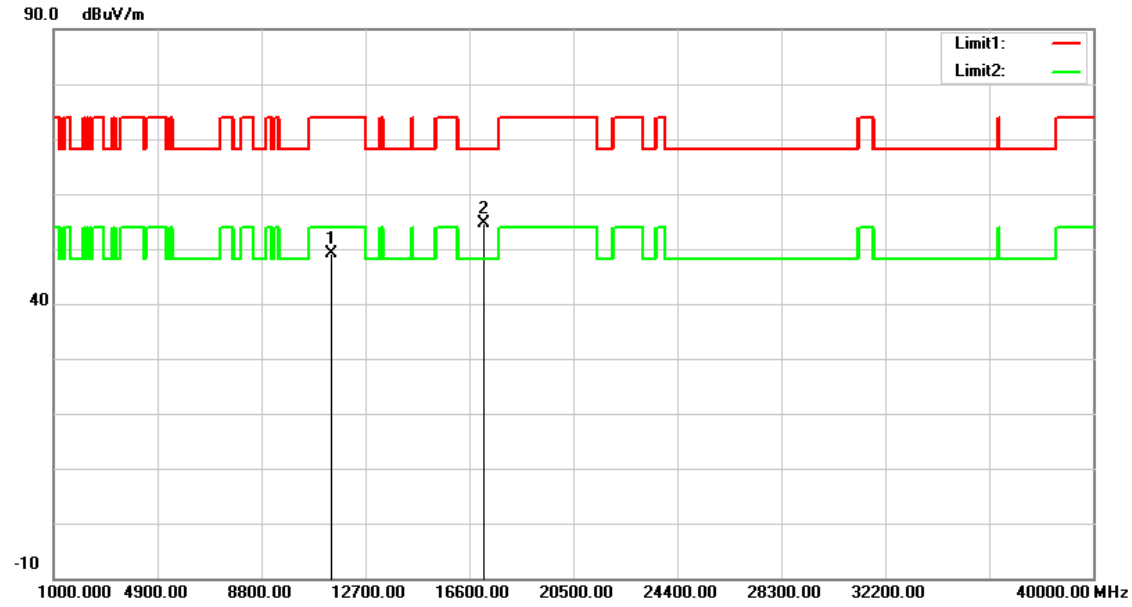


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	34.18	14.96	49.14	74.00	-24.86	peak
2	17130.000	35.35	19.21	54.56	68.20	-13.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

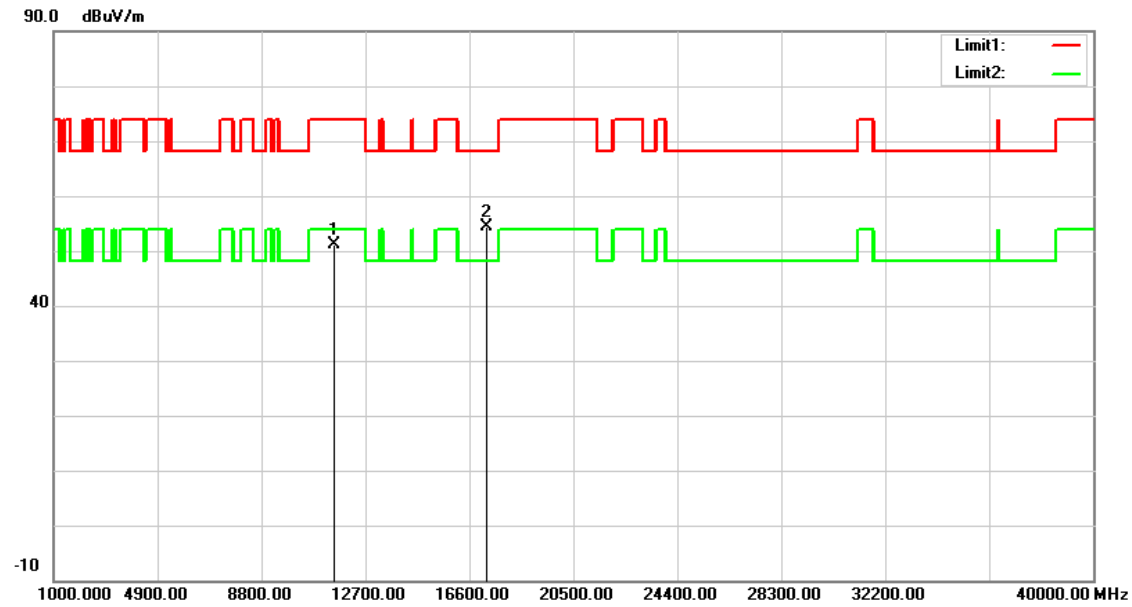


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.07	15.02	51.09	74.00	-22.91	peak
2	17265.000	34.41	19.89	54.30	68.20	-13.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

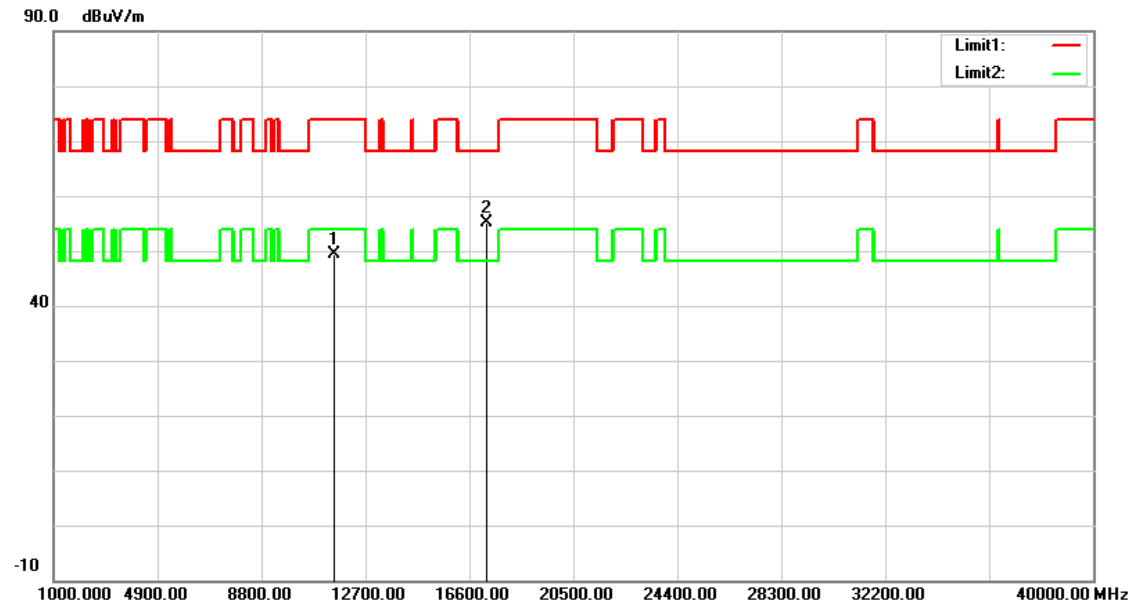


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.40	15.02	49.42	74.00	-24.58	peak
2	17265.000	35.14	19.89	55.03	68.20	-13.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

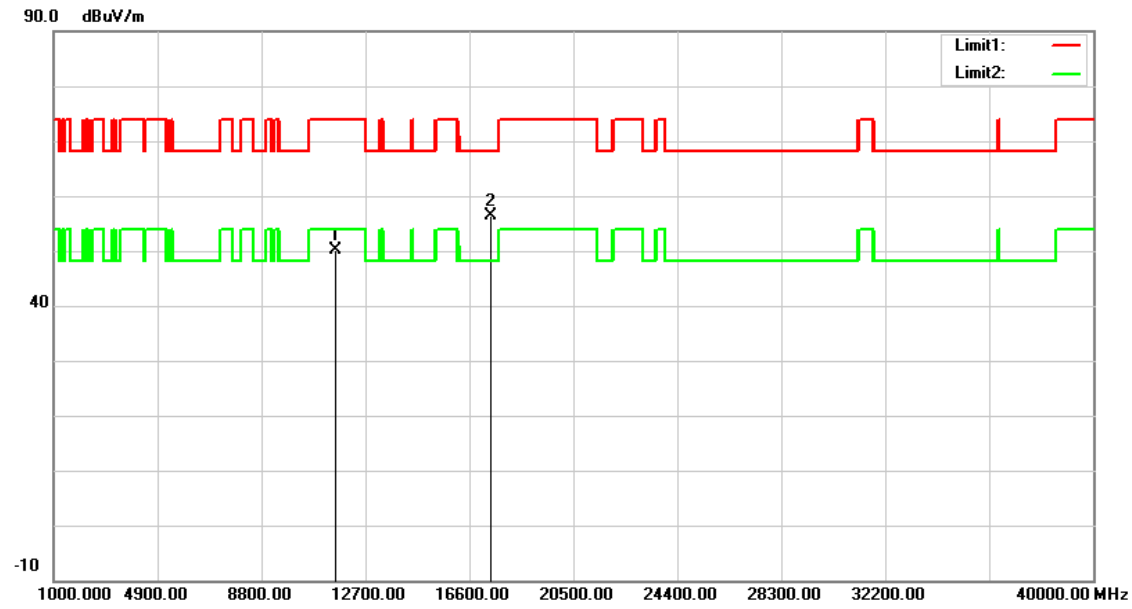


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.16	14.85	50.01	74.00	-23.99	peak
2	17385.000	35.89	20.49	56.38	68.20	-11.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

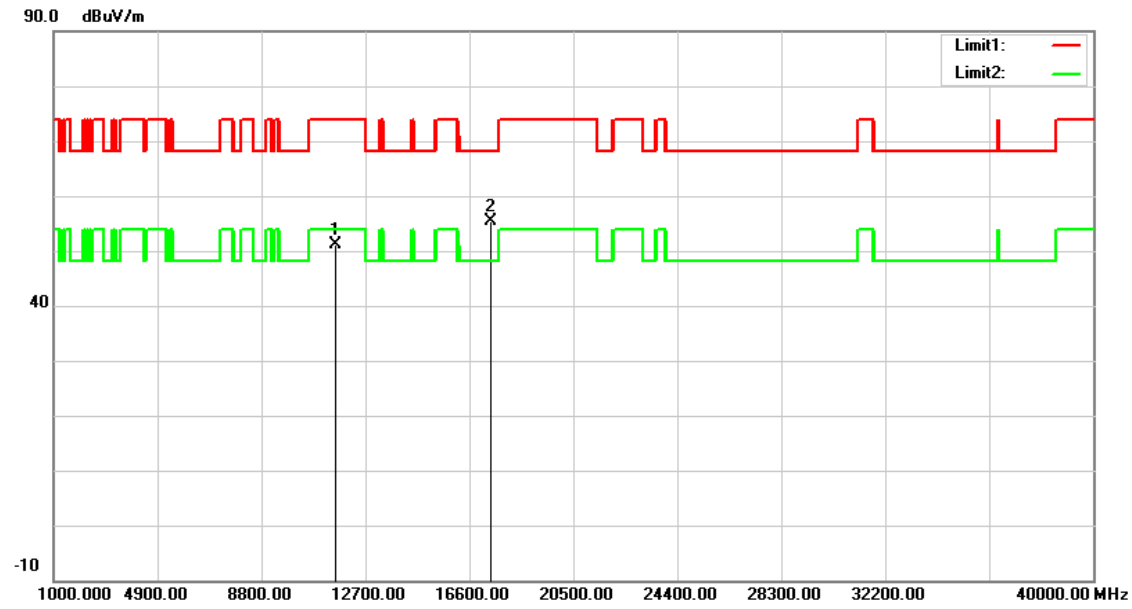


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.35	14.85	51.20	74.00	-22.80	peak
2	17385.000	34.99	20.49	55.48	68.20	-12.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

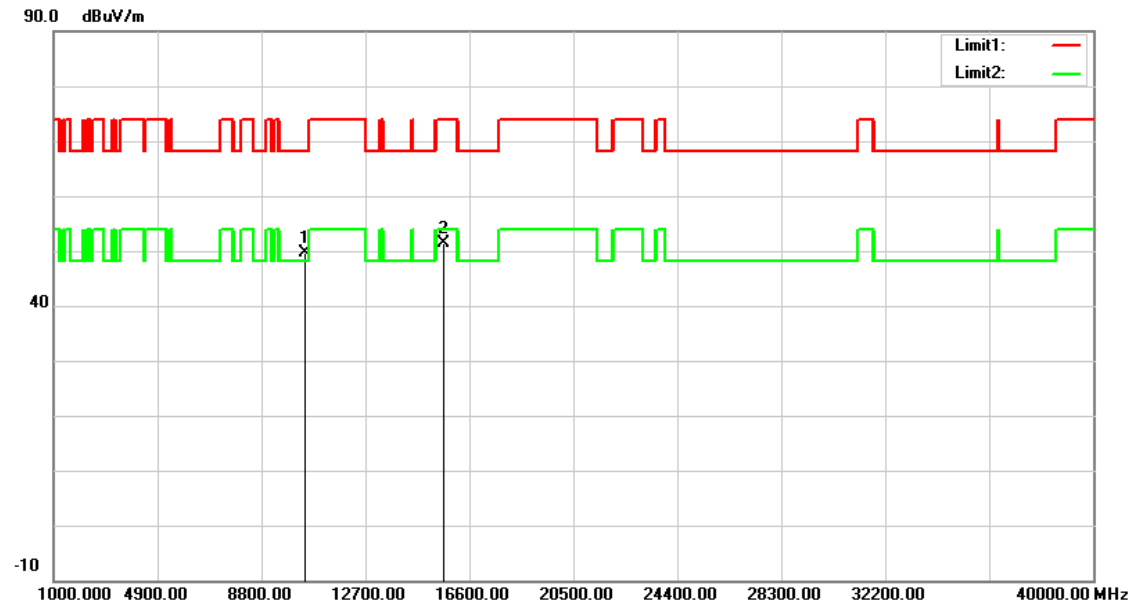


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.90	13.68	49.58	68.20	-18.62	peak
2	15630.000	35.92	15.53	51.45	74.00	-22.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

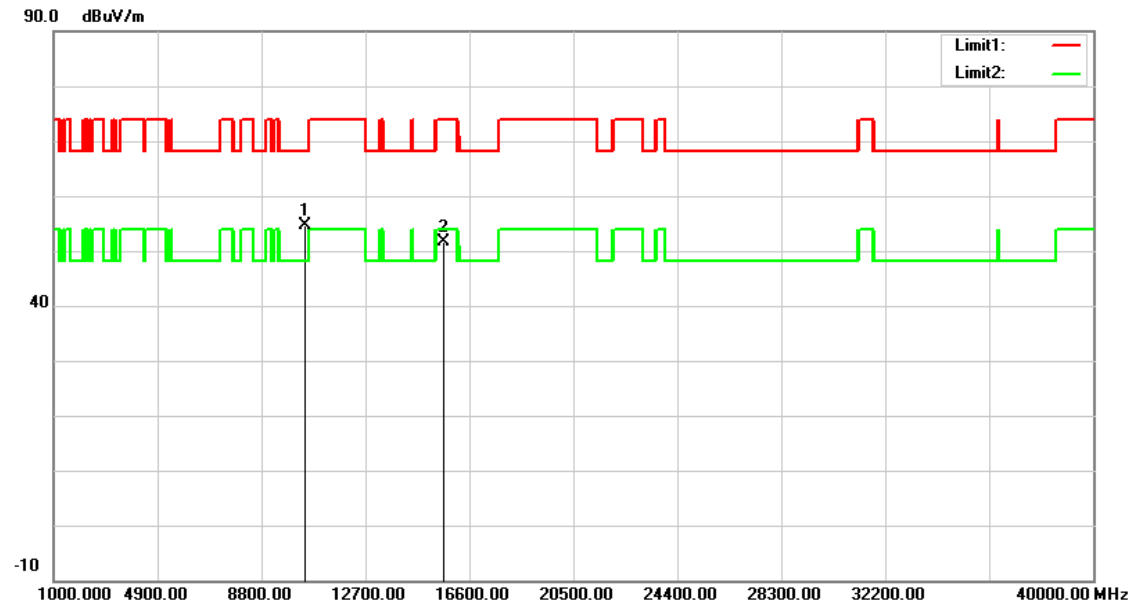


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	40.96	13.68	54.64	68.20	-13.56	peak
2	15630.000	36.12	15.53	51.65	74.00	-22.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

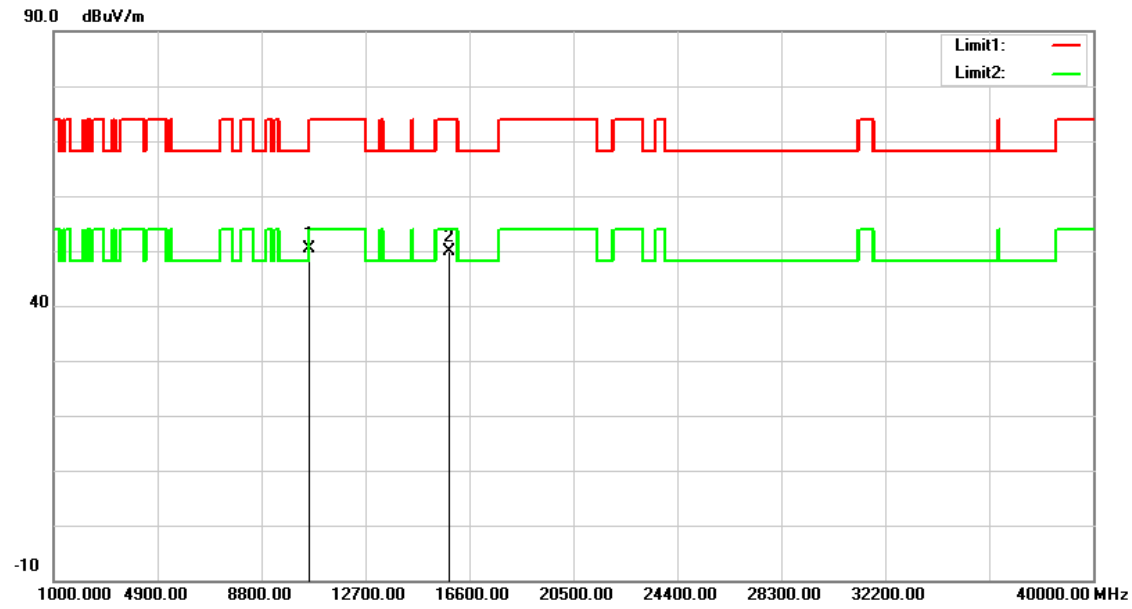


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.38	14.06	50.44	68.20	-17.76	peak
2	15870.000	35.00	14.96	49.96	74.00	-24.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

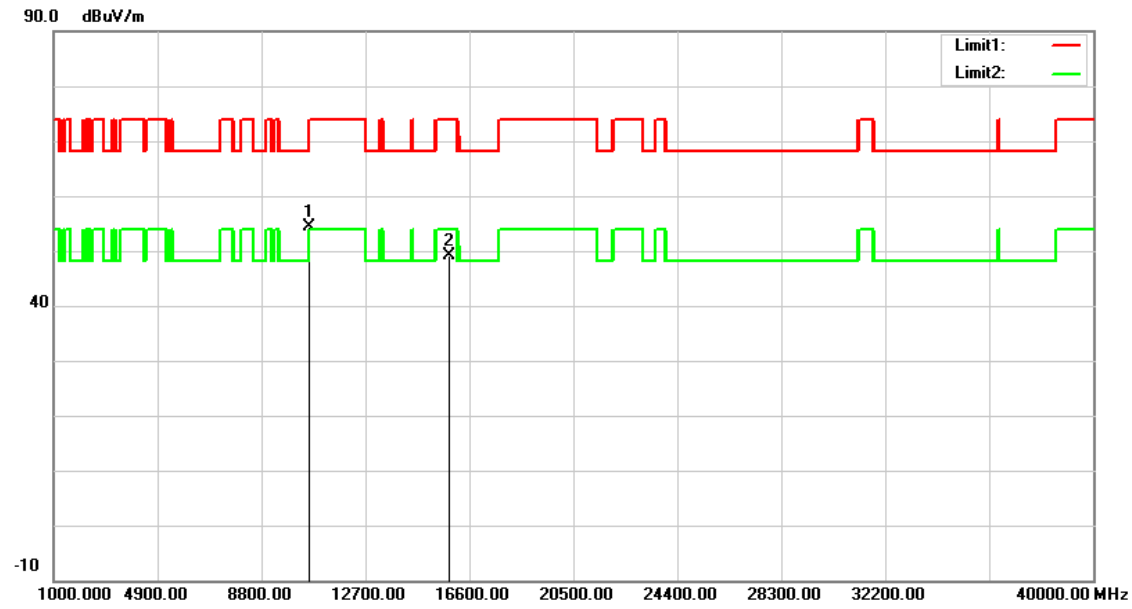


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	40.33	14.06	54.39	68.20	-13.81	peak
2	15870.000	34.23	14.96	49.19	74.00	-24.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

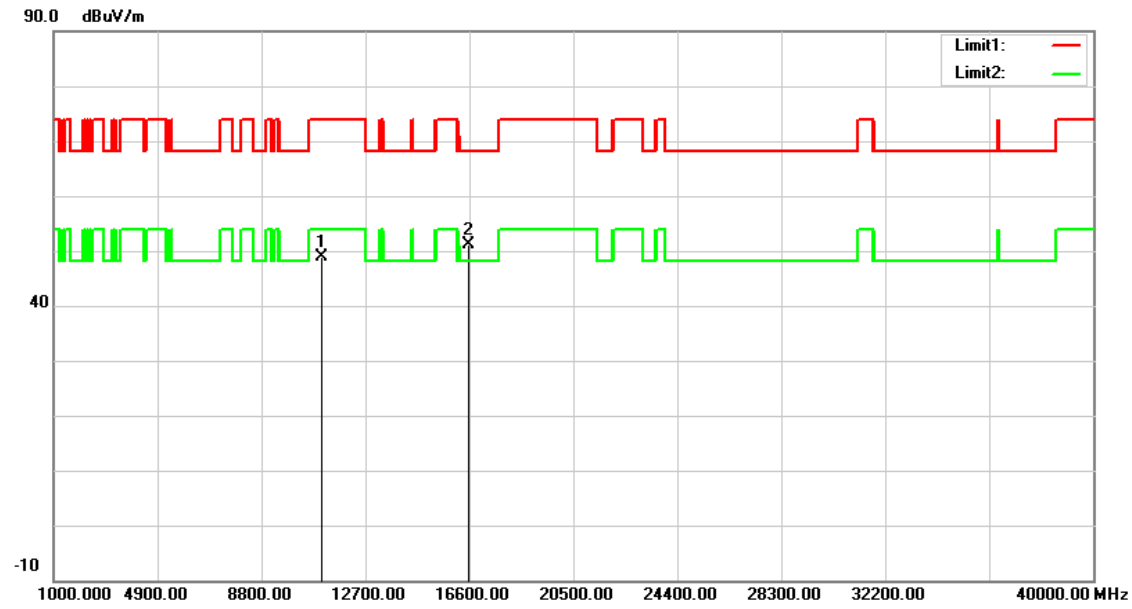


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.24	14.59	48.83	74.00	-25.17	peak
2	16590.000	34.74	16.30	51.04	68.20	-17.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

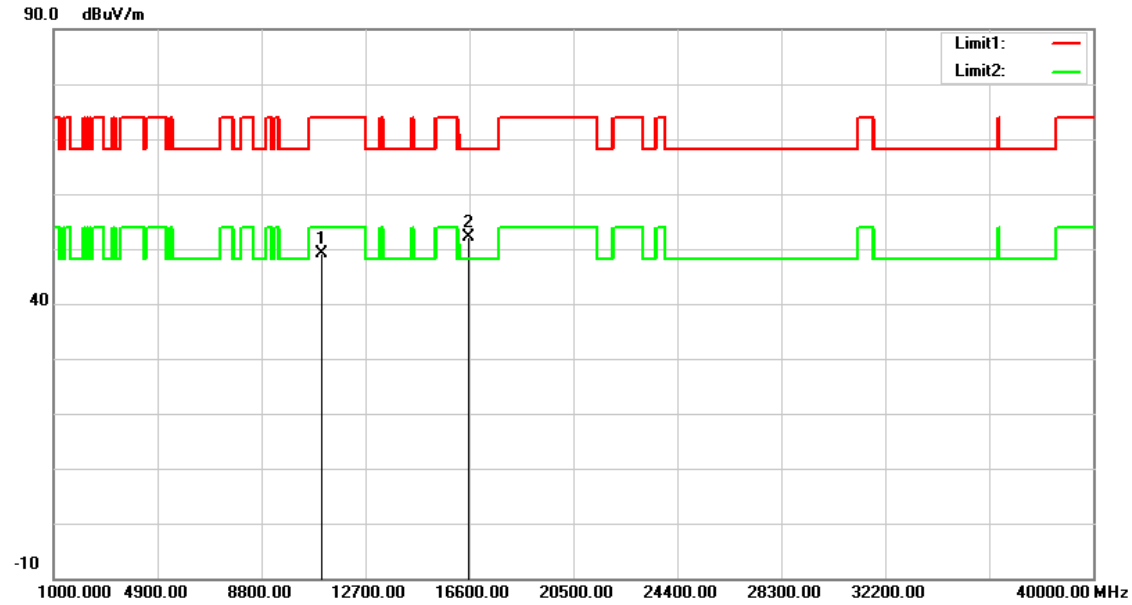


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.53	14.59	49.12	74.00	-24.88	peak
2	16590.000	35.94	16.30	52.24	68.20	-15.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

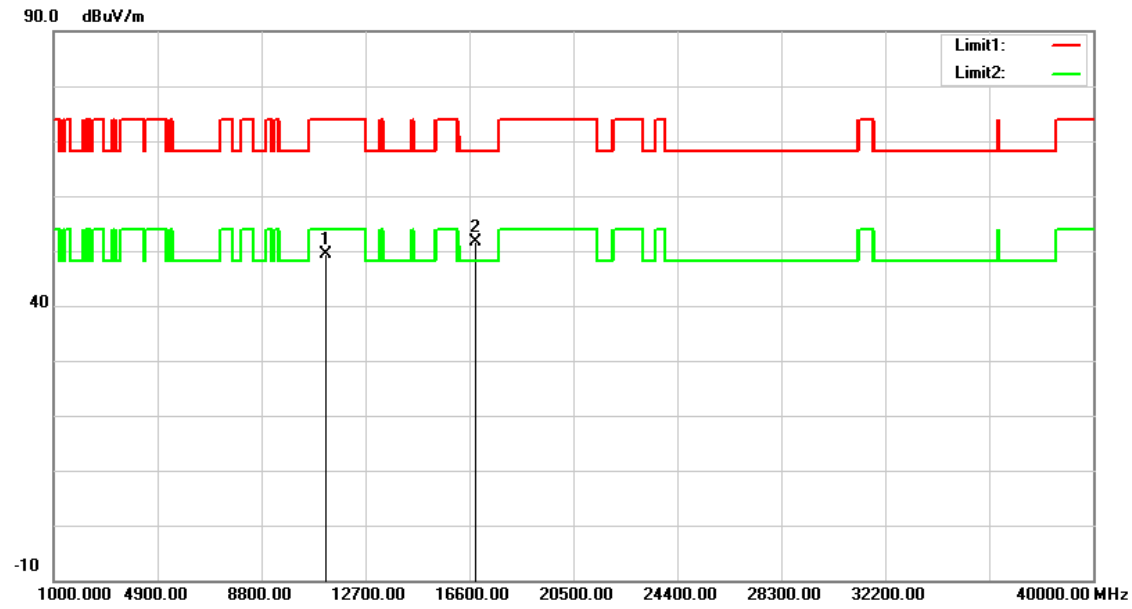


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.74	14.76	49.50	74.00	-24.50	peak
2	16830.000	34.04	17.62	51.66	68.20	-16.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

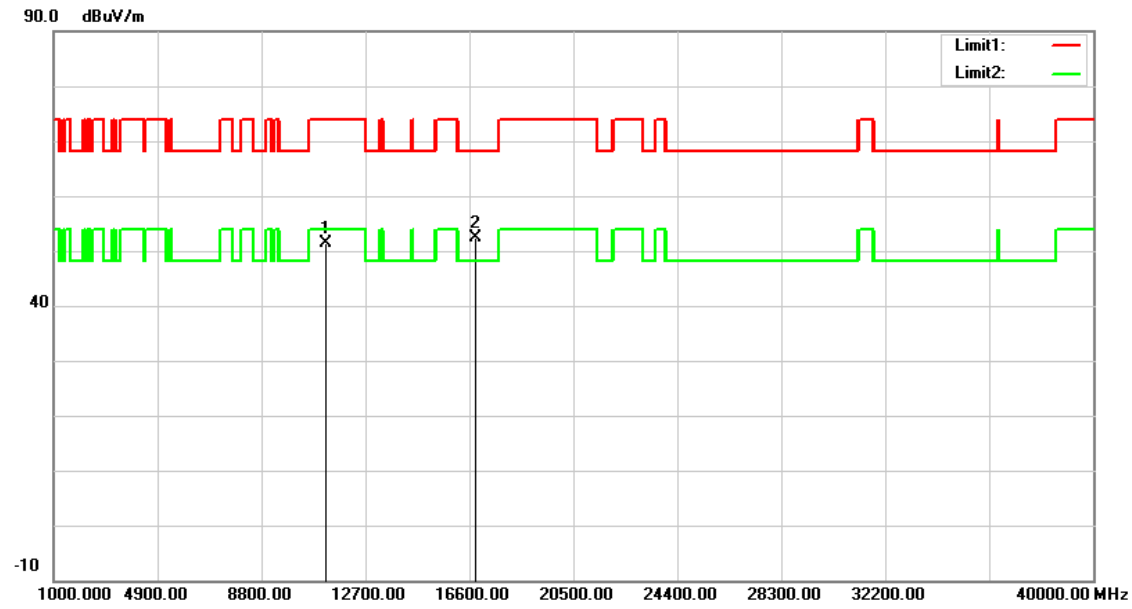


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	36.62	14.76	51.38	74.00	-22.62	peak
2	16830.000	34.67	17.62	52.29	68.20	-15.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

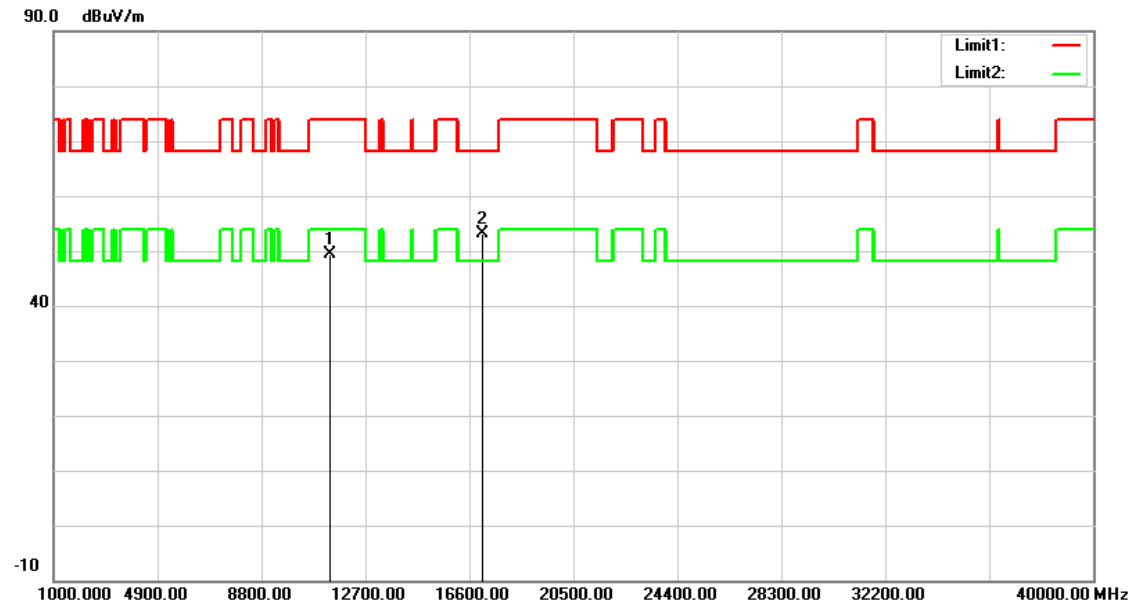


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	34.52	14.90	49.42	74.00	-24.58	peak
2	17070.000	34.14	18.91	53.05	68.20	-15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

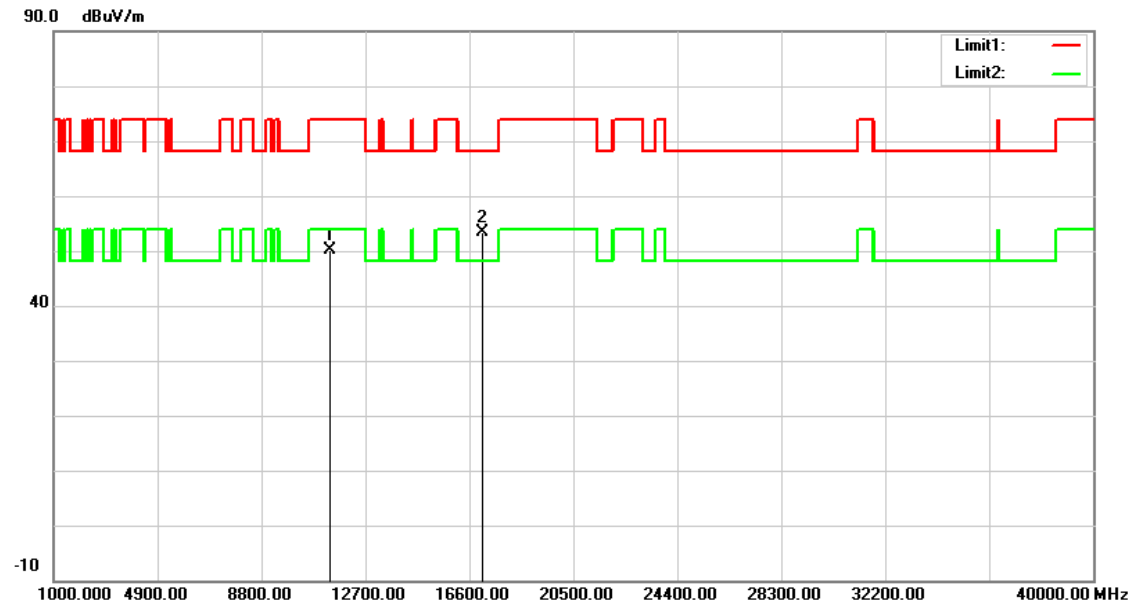


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	35.32	14.90	50.22	74.00	-23.78	peak
2	17070.000	34.51	18.91	53.42	68.20	-14.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

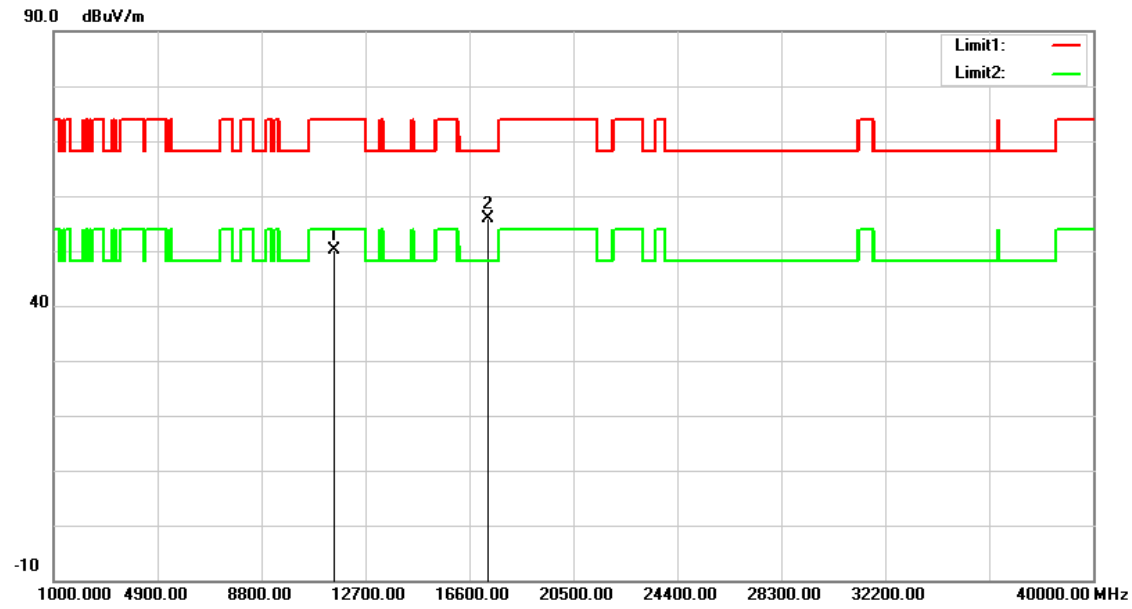


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.27	14.93	50.20	74.00	-23.80	peak
2	17325.000	35.76	20.19	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

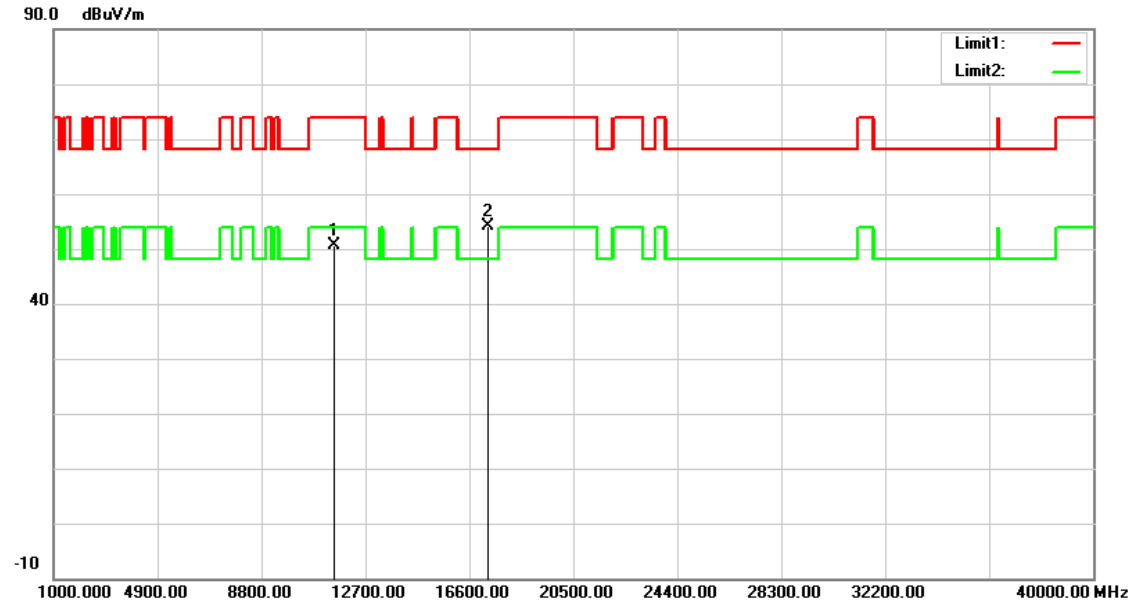


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.72	14.93	50.65	74.00	-23.35	peak
2	17325.000	33.94	20.19	54.13	68.20	-14.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		
Description:			

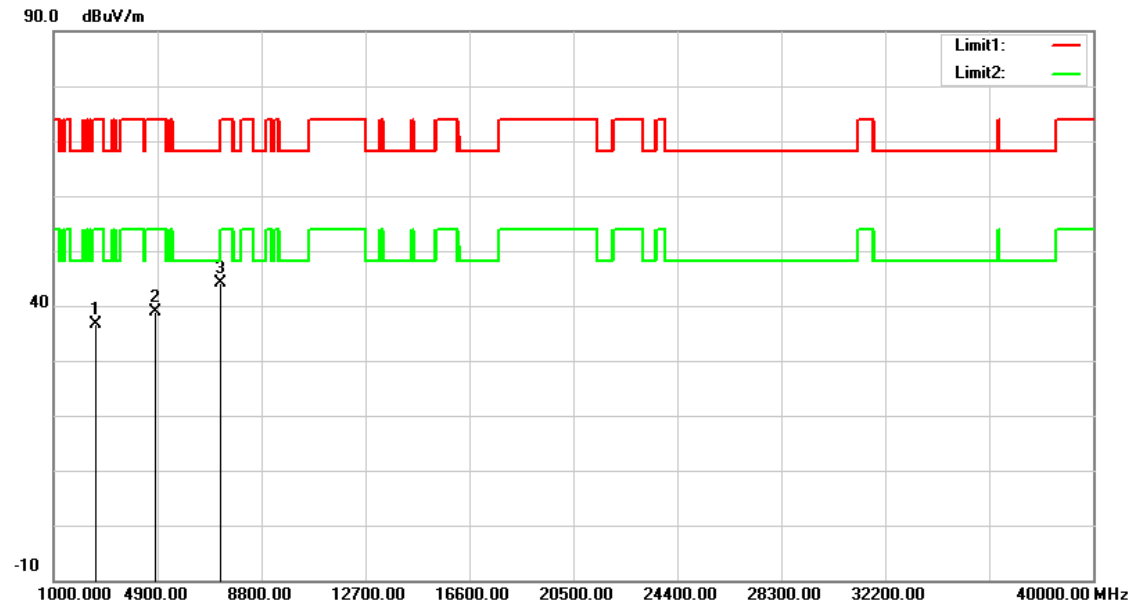


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	39.18	-2.52	36.66	74.00	-37.34	peak
2	4825.000	36.16	2.72	38.88	74.00	-35.12	peak
3	7273.000	35.72	8.42	44.14	74.00	-29.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Vertical		
Description:			

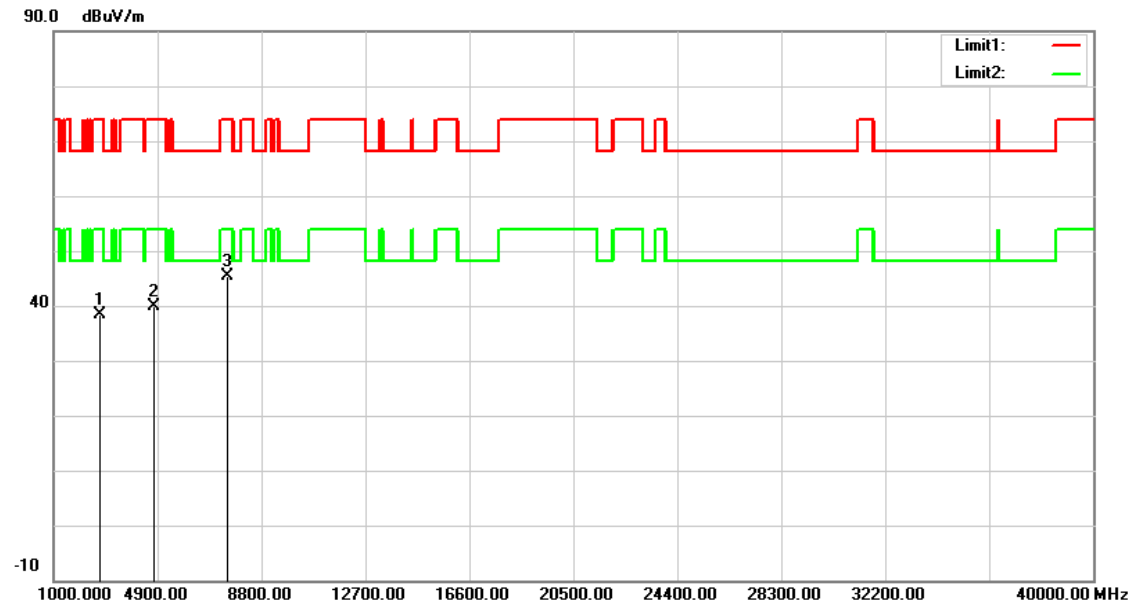

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	40.63	-2.19	38.44	74.00	-35.56	peak
2	4757.000	37.22	2.55	39.77	74.00	-34.23	peak
3	7477.000	36.44	9.06	45.50	74.00	-28.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

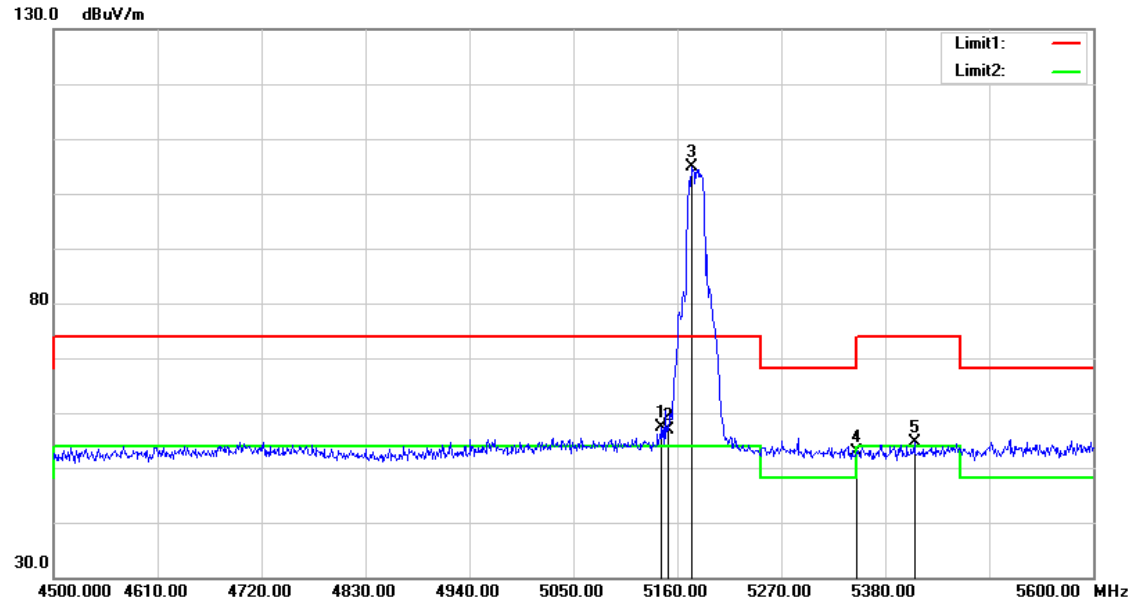


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.500	54.14	3.34	57.48	74.00	-16.52	peak
2	5150.000	53.58	3.35	56.93	74.00	-17.07	peak
3	5175.400	101.40	3.38	104.78	--	--	peak
4	5350.000	49.18	3.62	52.80	74.00	-21.20	peak
5	5410.800	50.93	3.70	54.63	74.00	-19.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

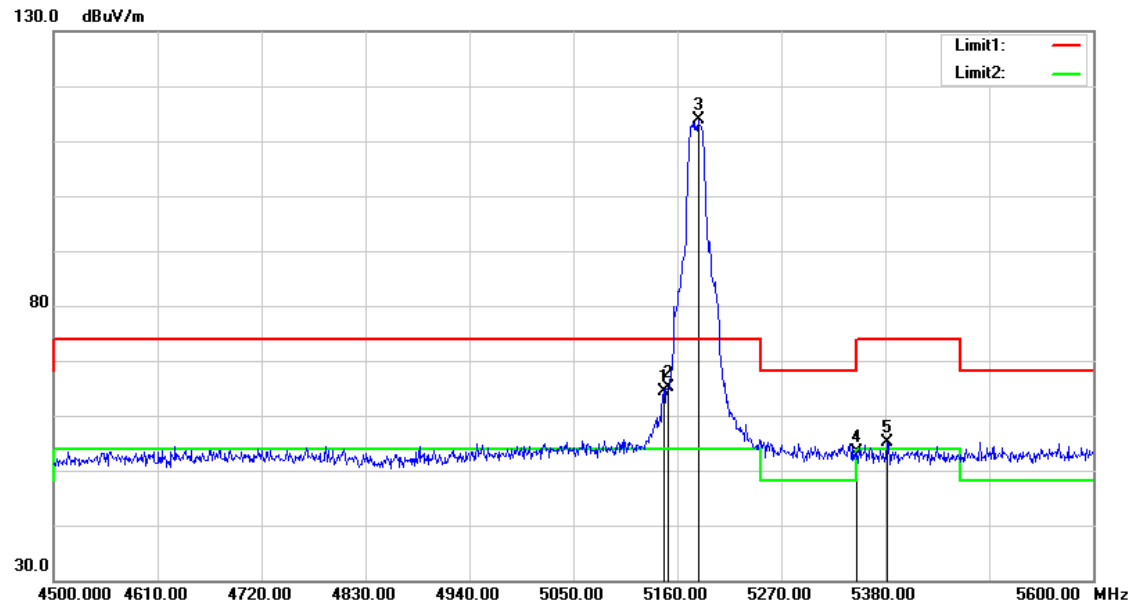


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	61.15	3.35	64.50	74.00	-9.50	peak
2	5150.000	61.81	3.35	65.16	74.00	-8.84	peak
3	5182.000	110.41	3.40	113.81	--	--	peak
4	5350.000	49.71	3.62	53.33	74.00	-20.67	peak
5	5382.200	51.35	3.66	55.01	74.00	-18.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

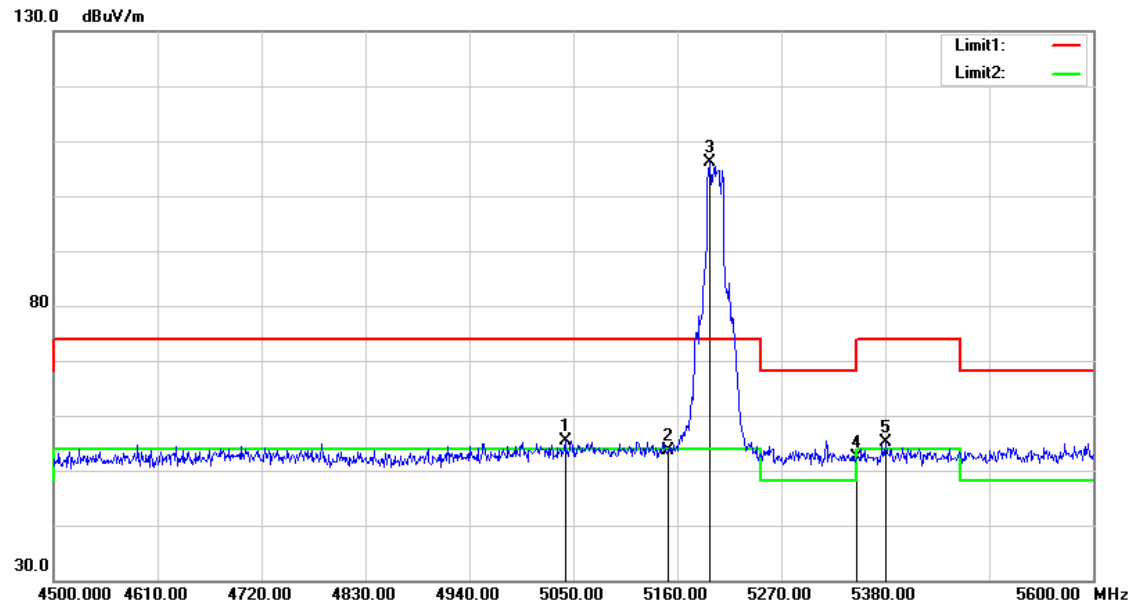


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5041.200	52.30	3.20	55.50	74.00	-18.50	peak
2	5150.000	50.19	3.35	53.54	74.00	-20.46	peak
3	5194.100	102.63	3.41	106.04	--	--	peak
4	5350.000	48.72	3.62	52.34	74.00	-21.66	peak
5	5380.000	51.57	3.65	55.22	74.00	-18.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

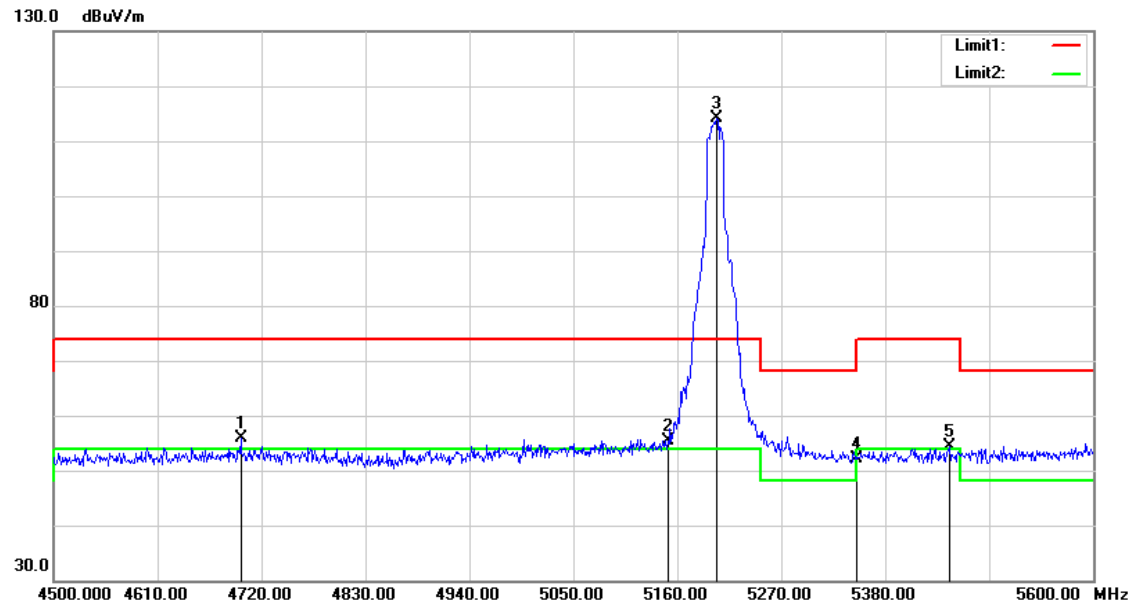


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4698.000	53.53	2.42	55.95	74.00	-18.05	peak
2	5150.000	52.07	3.35	55.42	74.00	-18.58	peak
3	5201.800	110.81	3.42	114.23	--	--	peak
4	5350.000	48.49	3.62	52.11	74.00	-21.89	peak
5	5448.200	50.73	3.75	54.48	74.00	-19.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

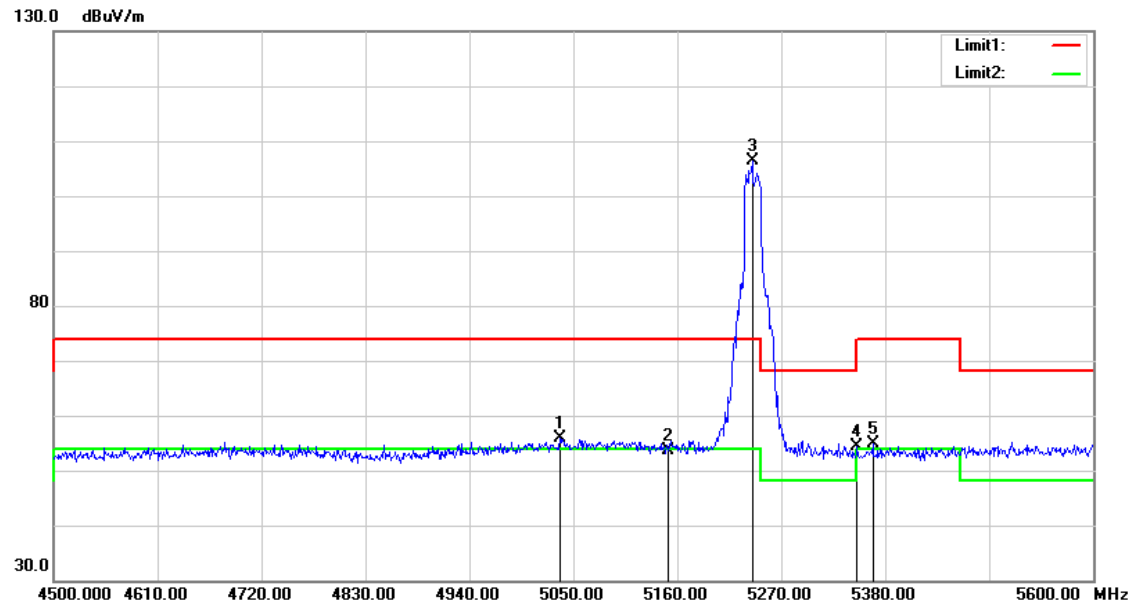


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5035.700	52.61	3.20	55.81	74.00	-18.19	peak
2	5150.000	50.27	3.35	53.62	74.00	-20.38	peak
3	5239.200	102.97	3.46	106.43	--	--	peak
4	5350.000	50.73	3.62	54.35	74.00	-19.65	peak
5	5366.800	51.33	3.64	54.97	74.00	-19.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

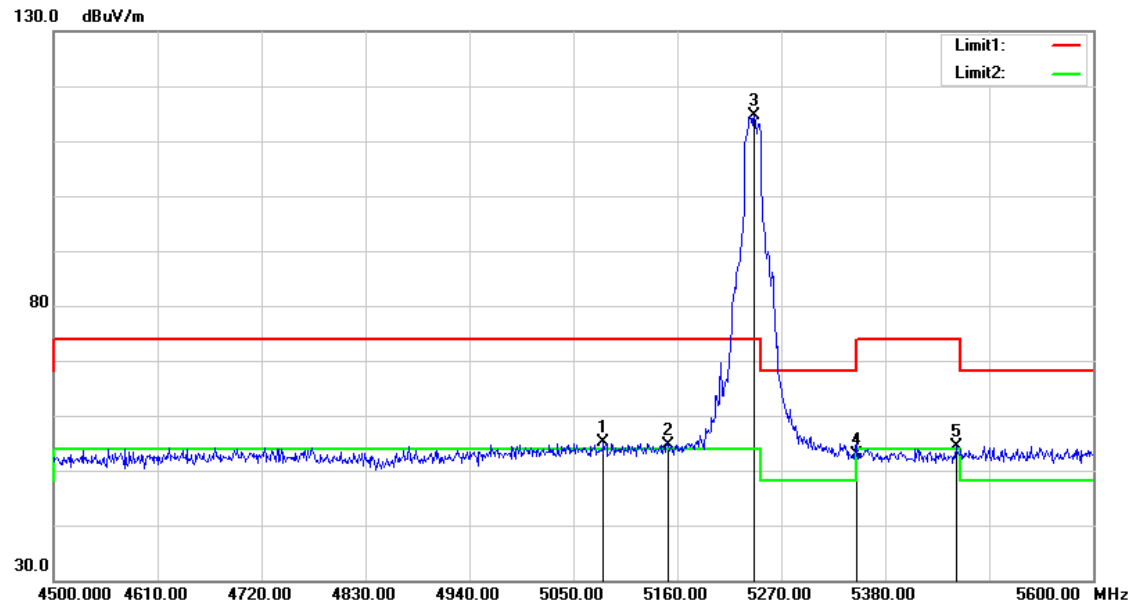


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5081.900	51.90	3.26	55.16	74.00	-18.84	peak
2	5150.000	51.34	3.35	54.69	74.00	-19.31	peak
3	5241.400	111.14	3.47	114.61	--	--	peak
4	5350.000	49.14	3.62	52.76	74.00	-21.24	peak
5	5454.800	50.69	3.75	54.44	74.00	-19.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

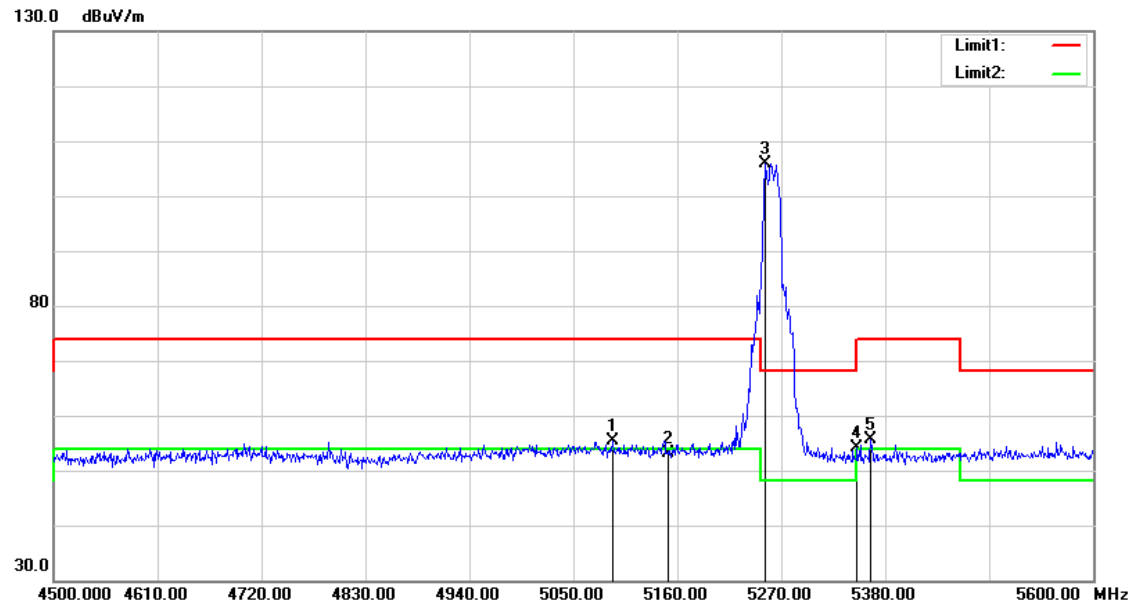


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	52.17	3.26	55.43	74.00	-18.57	peak
2	5150.000	49.75	3.35	53.10	74.00	-20.90	peak
3	5253.500	102.52	3.48	106.00	--	--	peak
4	5350.000	50.51	3.62	54.13	74.00	-19.87	peak
5	5364.600	51.95	3.64	55.59	74.00	-18.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

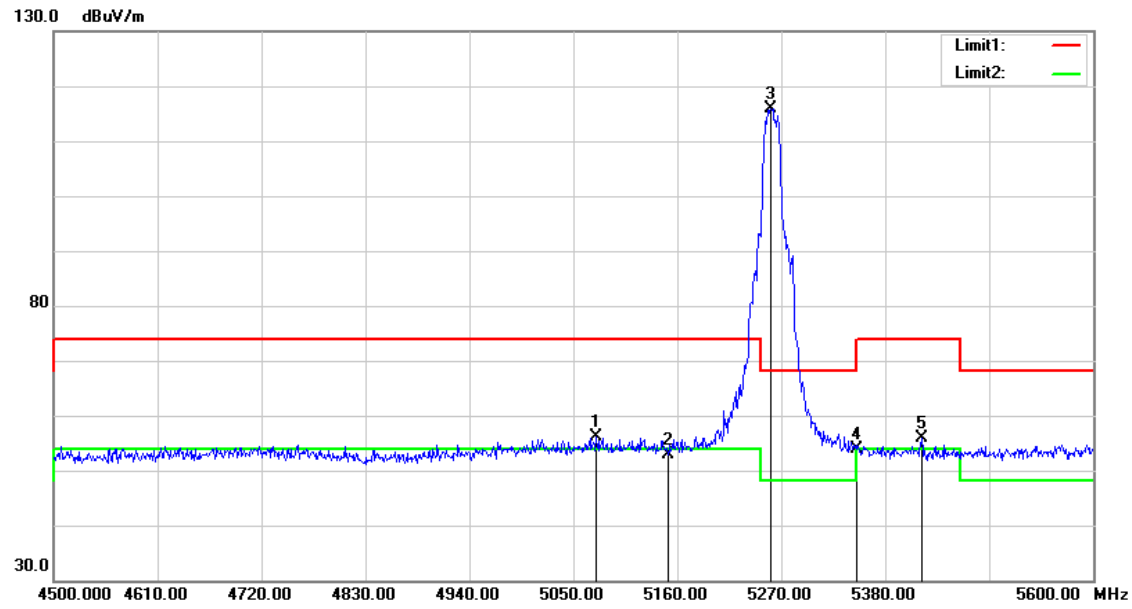


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5074.200	52.87	3.25	56.12	74.00	-17.88	peak
2	5150.000	49.57	3.35	52.92	74.00	-21.08	peak
3	5259.000	112.47	3.49	115.96	--	--	peak
4	5350.000	50.26	3.62	53.88	74.00	-20.12	peak
5	5418.500	52.16	3.70	55.86	74.00	-18.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

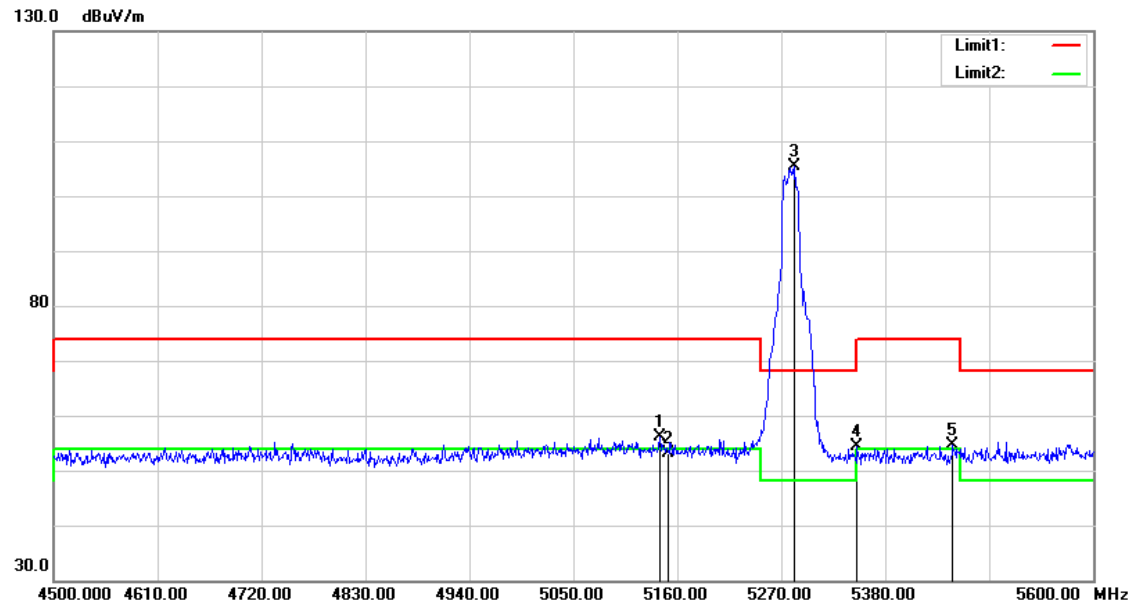


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.300	52.81	3.34	56.15	74.00	-17.85	peak
2	5150.000	49.90	3.35	53.25	74.00	-20.75	peak
3	5284.300	101.81	3.53	105.34	--	--	peak
4	5350.000	50.75	3.62	54.37	74.00	-19.63	peak
5	5451.500	50.76	3.75	54.51	74.00	-19.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

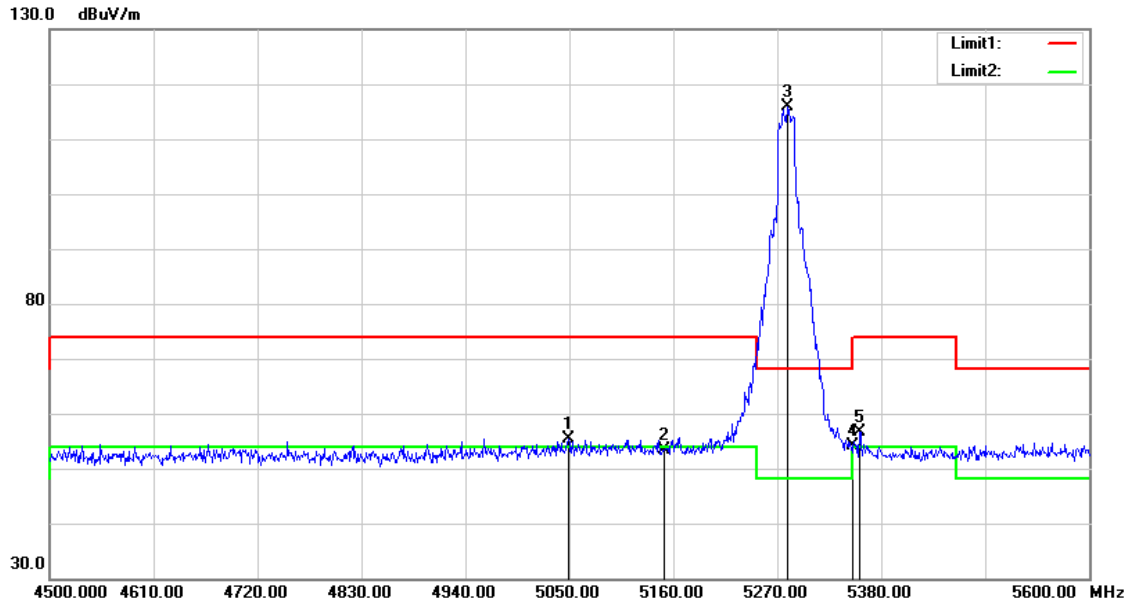


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5048.900	52.21	3.21	55.42	74.00	-18.58	peak
2	5150.000	50.03	3.35	53.38	74.00	-20.62	peak
3	5281.000	112.36	3.51	115.87	--	--	peak
4	5350.000	50.58	3.62	54.20	74.00	-19.80	peak
5	5356.900	52.92	3.63	56.55	74.00	-17.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

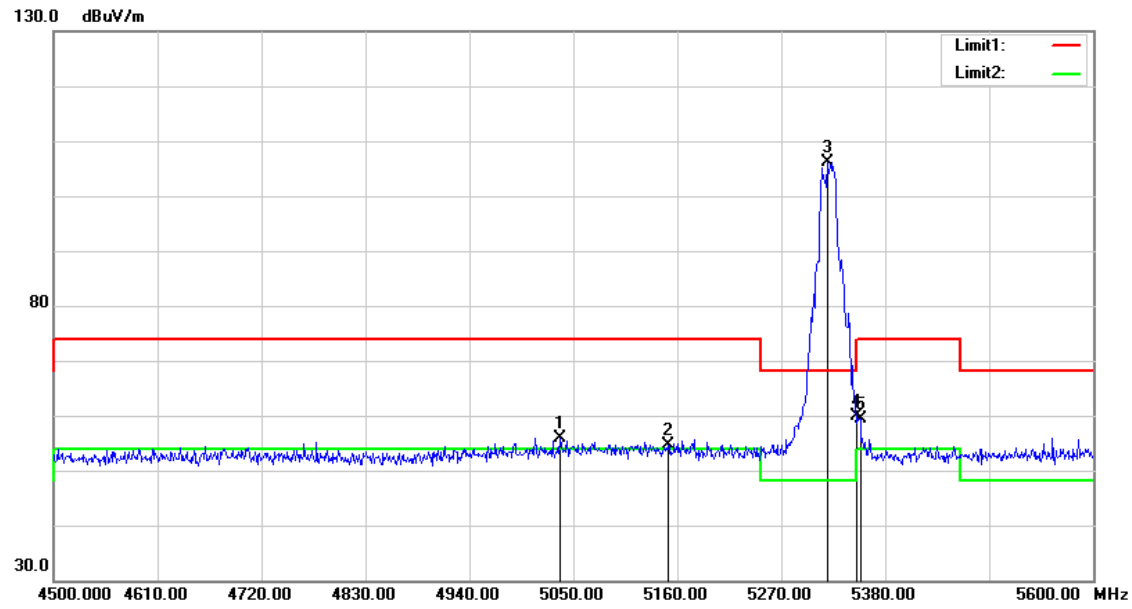


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5035.700	52.72	3.20	55.92	74.00	-18.08	peak
2	5150.000	51.18	3.35	54.53	74.00	-19.47	peak
3	5318.400	102.60	3.57	106.17	--	--	peak
4	5350.000	56.32	3.62	59.94	74.00	-14.06	peak
5	5353.600	55.80	3.62	59.42	74.00	-14.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

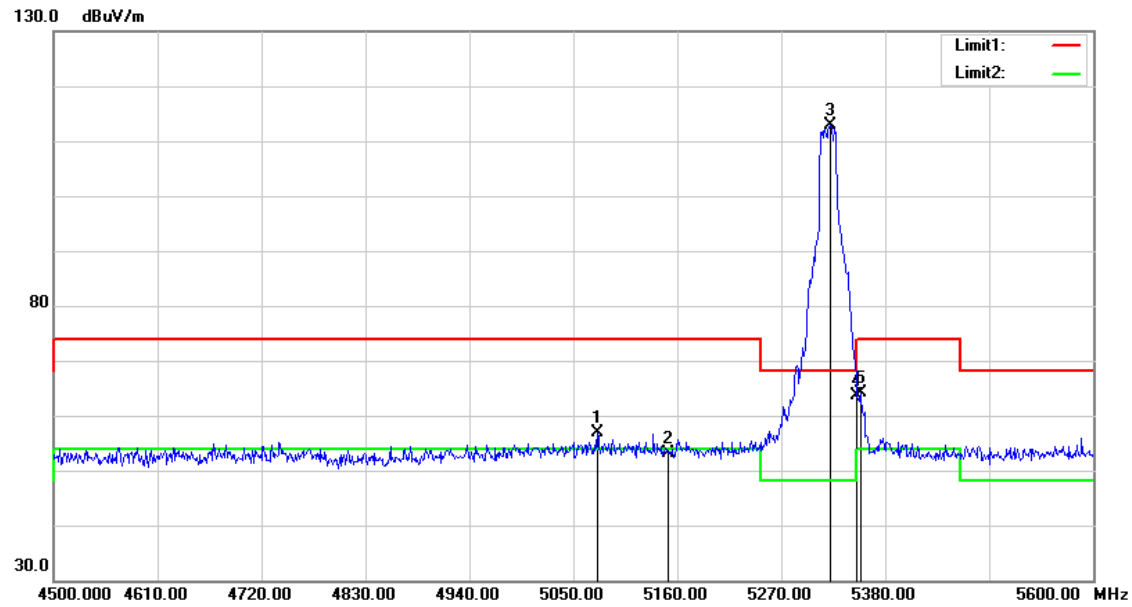


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5075.300	53.61	3.25	56.86	74.00	-17.14	peak
2	5150.000	49.83	3.35	53.18	74.00	-20.82	peak
3	5321.700	109.27	3.58	112.85	--	--	peak
4	5350.000	59.92	3.62	63.54	74.00	-10.46	peak
5	5353.600	60.57	3.62	64.19	74.00	-9.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

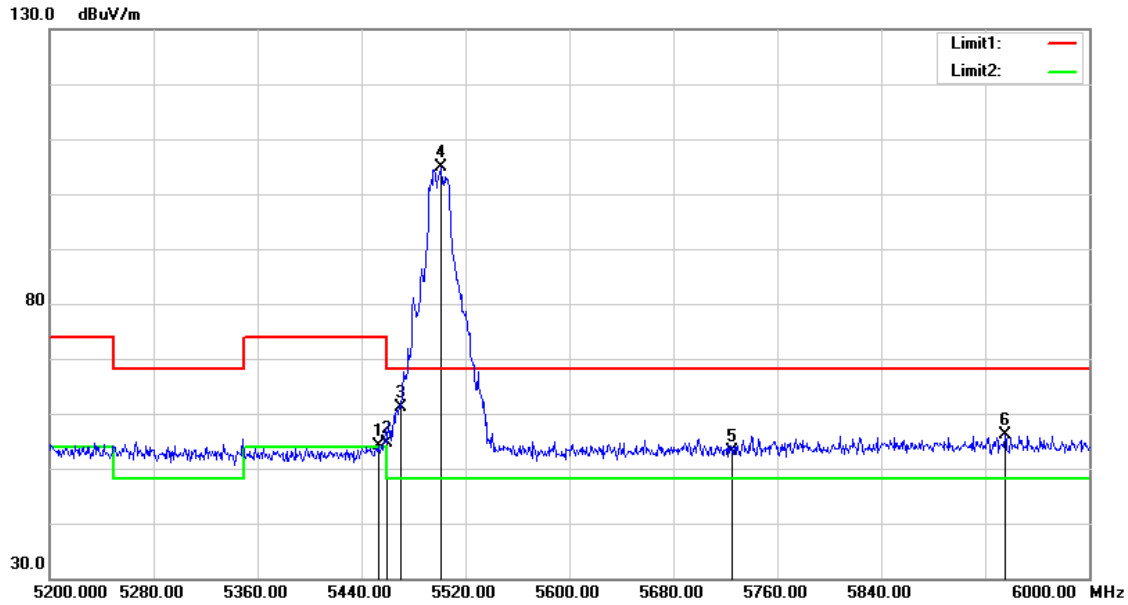


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	50.26	3.75	54.01	74.00	-19.99	peak
2	5460.000	50.87	3.76	54.63	74.00	-19.37	peak
3	5470.000	57.42	3.78	61.20	68.20	-7.00	peak
4	5500.800	101.16	3.82	104.98	--	--	peak
5	5725.000	48.85	4.19	53.04	68.20	-15.16	peak
6	5935.200	51.47	4.54	56.01	68.20	-12.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

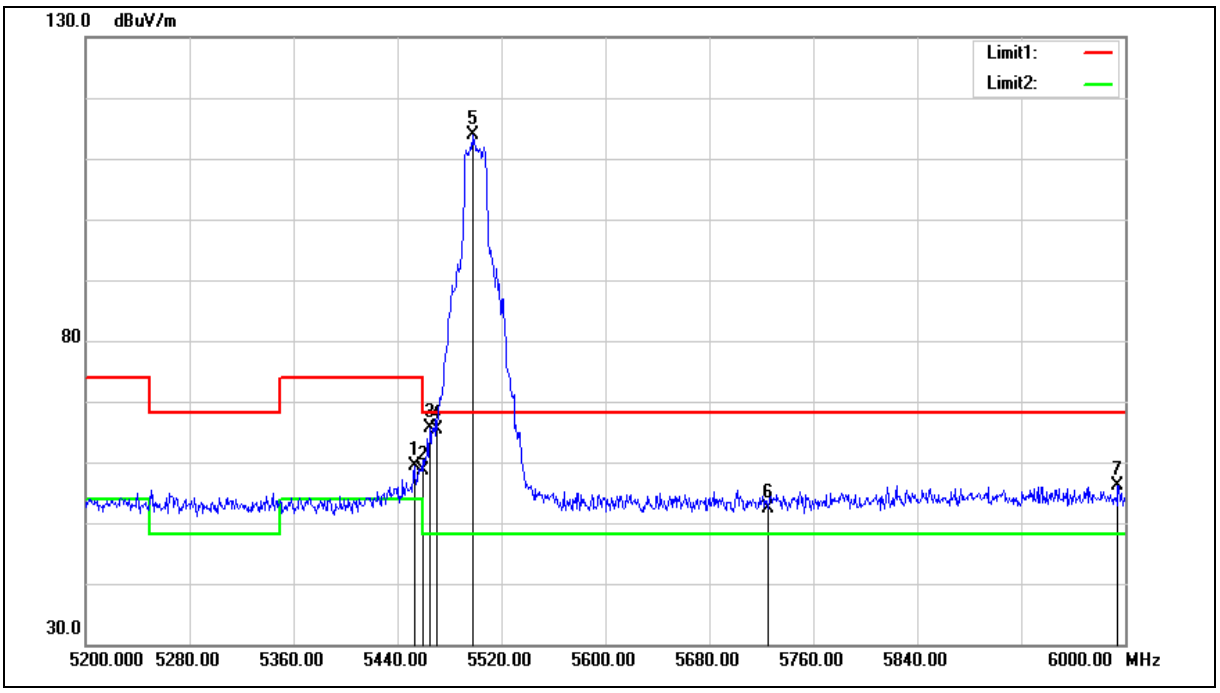

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	55.55	3.75	59.30	74.00	-14.70	peak
2	5460.000	54.83	3.76	58.59	74.00	-15.41	peak
3	5464.800	61.75	3.76	65.51	68.20	-2.69	peak
4	5470.000	61.54	3.78	65.32	68.20	-2.88	peak
5	5497.600	110.02	3.81	113.83	--	--	peak
6	5725.000	48.08	4.19	52.27	68.20	-15.93	peak
7	5994.400	51.61	4.64	56.25	68.20	-11.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

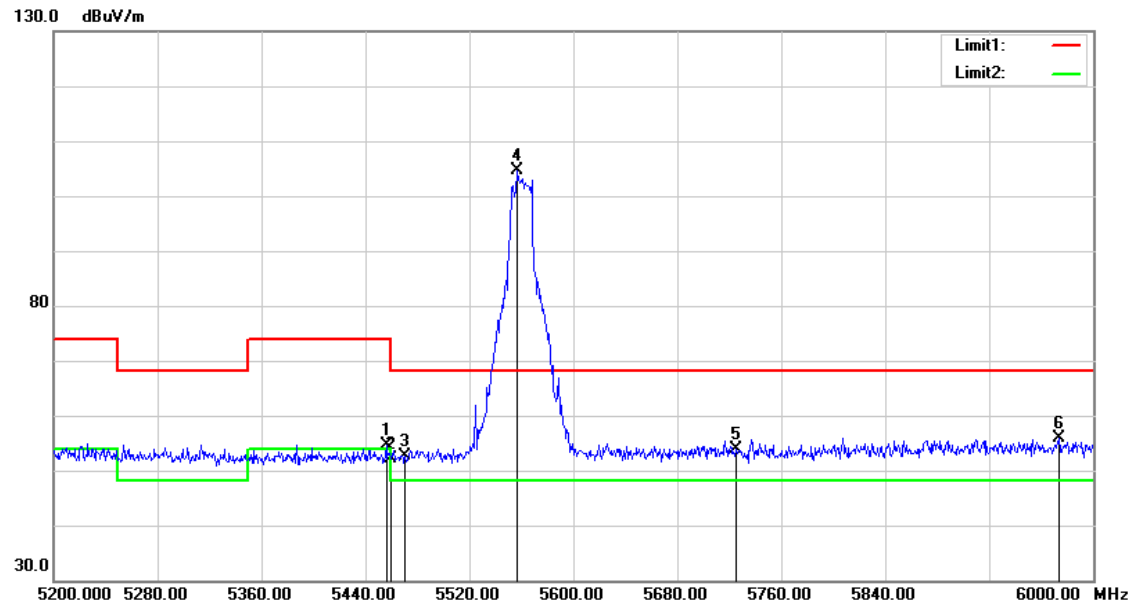


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.000	50.83	3.75	54.58	74.00	-19.42	peak
2	5460.000	48.43	3.76	52.19	74.00	-21.81	peak
3	5470.000	48.96	3.78	52.74	68.20	-15.46	peak
4	5556.800	100.72	3.91	104.63	--	--	peak
5	5725.000	49.77	4.19	53.96	68.20	-14.24	peak
6	5973.600	51.19	4.61	55.80	68.20	-12.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

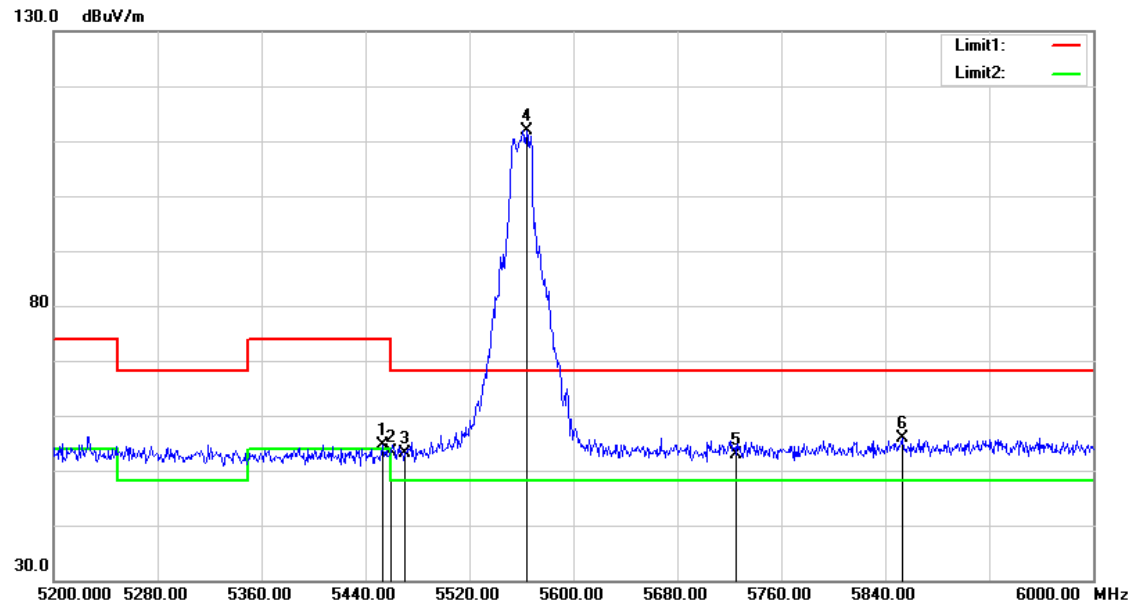


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.600	50.99	3.75	54.74	74.00	-19.26	peak
2	5460.000	49.57	3.76	53.33	74.00	-20.67	peak
3	5470.000	49.23	3.78	53.01	68.20	-15.19	peak
4	5564.000	107.88	3.93	111.81	--	--	peak
5	5725.000	48.68	4.19	52.87	68.20	-15.33	peak
6	5852.800	51.53	4.40	55.93	68.20	-12.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

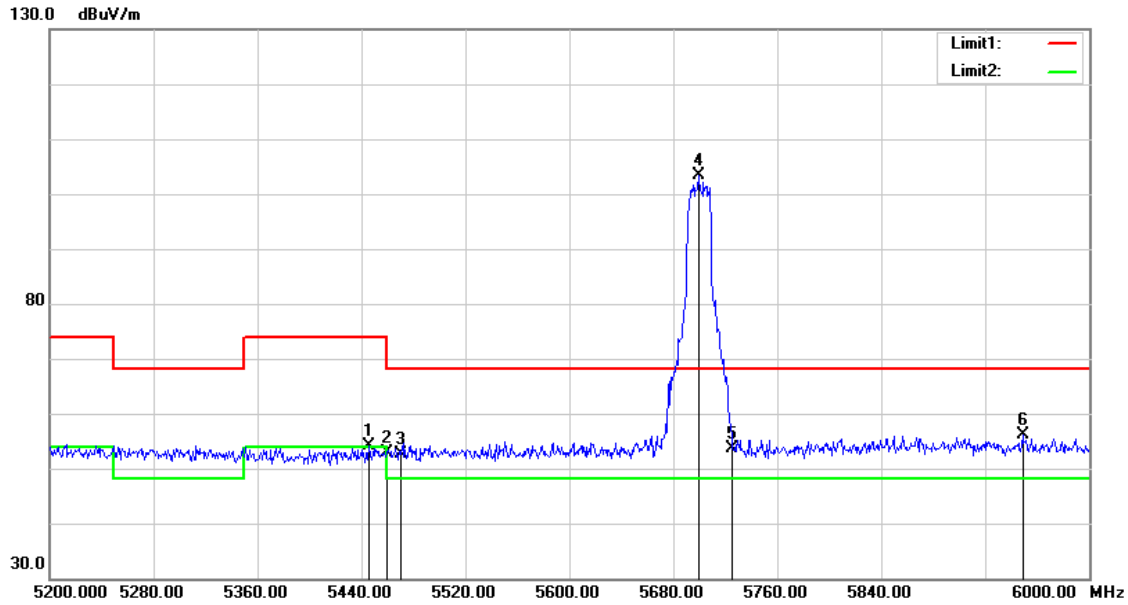


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.600	50.39	3.74	54.13	74.00	-19.87	peak
2	5460.000	49.02	3.76	52.78	74.00	-21.22	peak
3	5470.000	48.73	3.78	52.51	68.20	-15.69	peak
4	5699.200	99.32	4.14	103.46	--	--	peak
5	5725.000	49.51	4.19	53.70	68.20	-14.50	peak
6	5948.800	51.66	4.57	56.23	68.20	-11.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

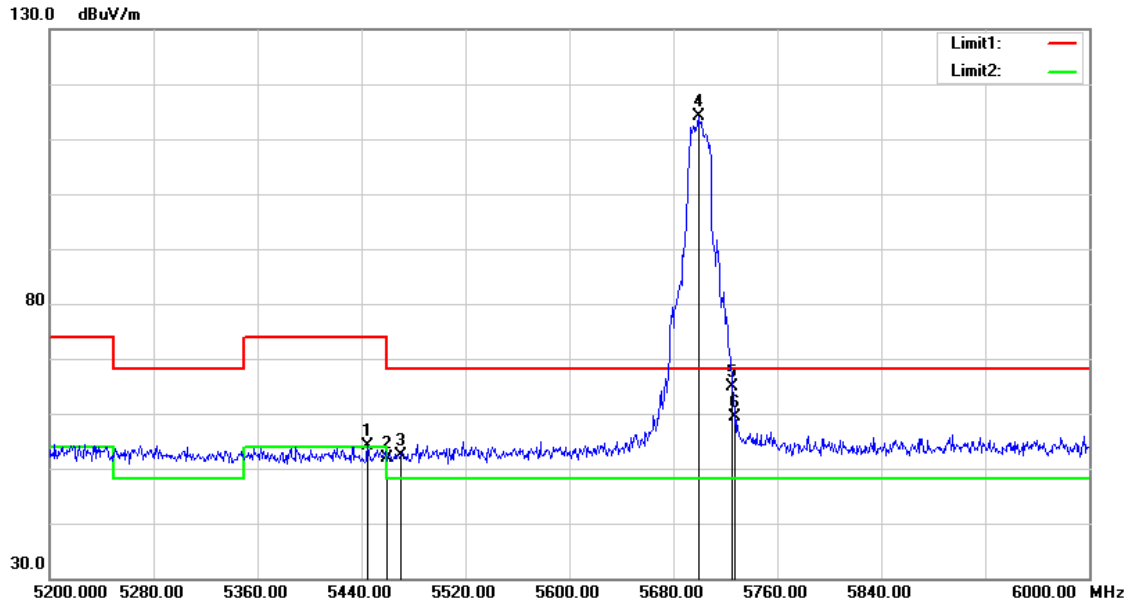


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.800	50.37	3.74	54.11	74.00	-19.89	peak
2	5460.000	48.12	3.76	51.88	74.00	-22.12	peak
3	5470.000	48.59	3.78	52.37	68.20	-15.83	peak
4	5699.200	109.88	4.14	114.02	--	--	peak
5	5725.000	60.59	4.19	64.78	68.20	-3.42	peak
6	5727.200	55.10	4.20	59.30	68.20	-8.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

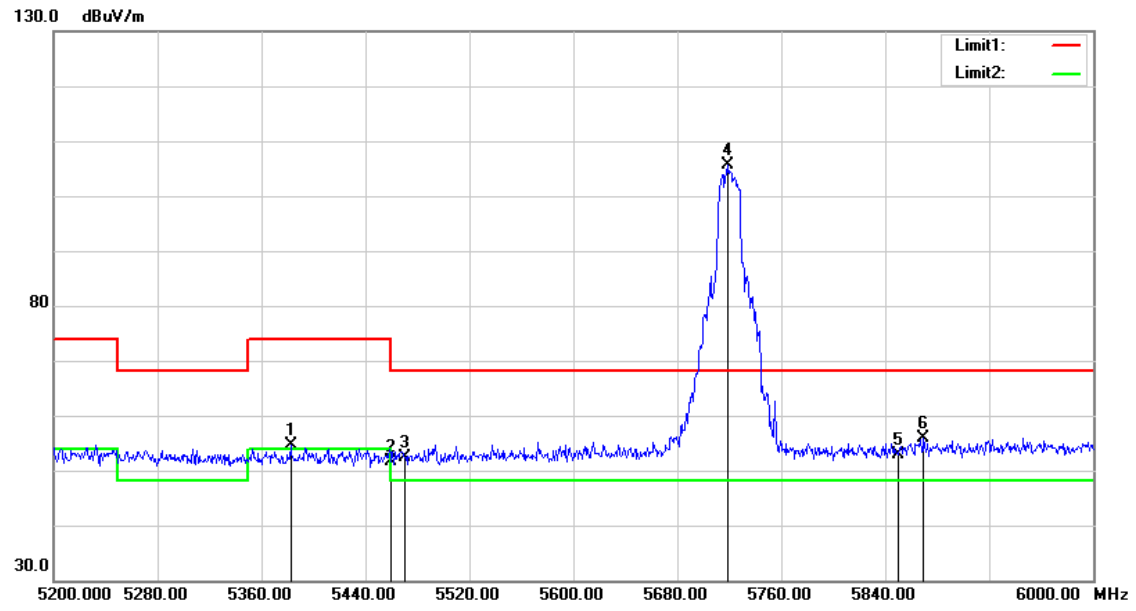


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.400	50.87	3.66	54.53	74.00	-19.47	peak
2	5460.000	47.77	3.76	51.53	74.00	-22.47	peak
3	5470.000	48.49	3.78	52.27	68.20	-15.93	peak
4	5719.200	101.42	4.18	105.60	--	--	peak
5	5850.000	48.58	4.40	52.98	68.20	-15.22	peak
6	5869.600	51.45	4.43	55.88	68.20	-12.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

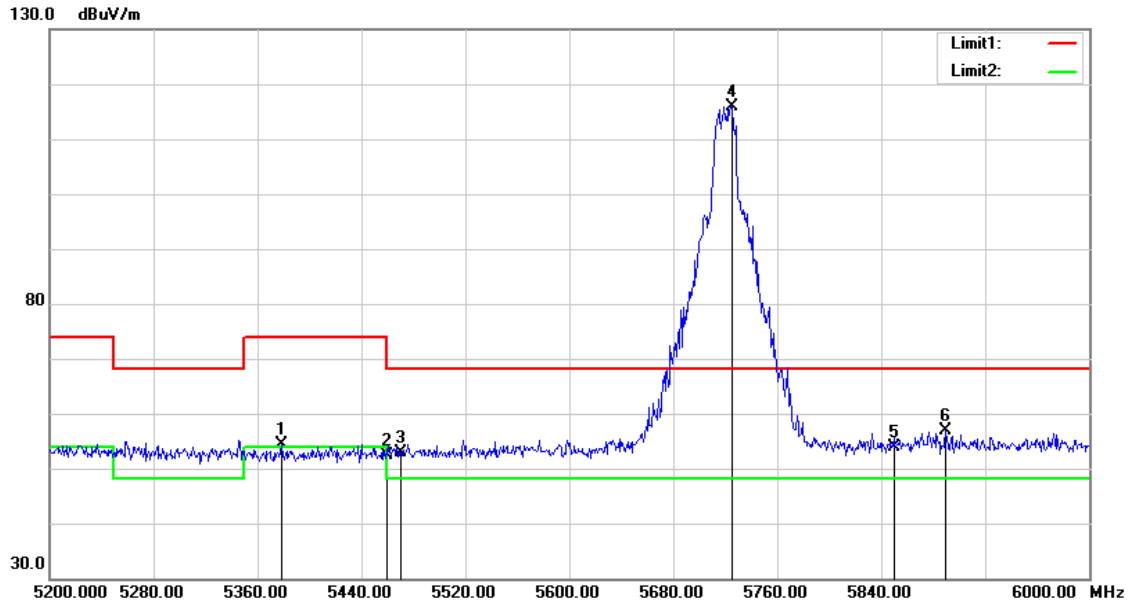


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5378.400	50.72	3.65	54.37	74.00	-19.63	peak
2	5460.000	48.74	3.76	52.50	74.00	-21.50	peak
3	5470.000	49.19	3.78	52.97	68.20	-15.23	peak
4	5724.800	111.81	4.19	116.00	--	--	peak
5	5850.000	49.54	4.40	53.94	68.20	-14.26	peak
6	5889.600	52.32	4.46	56.78	68.20	-11.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

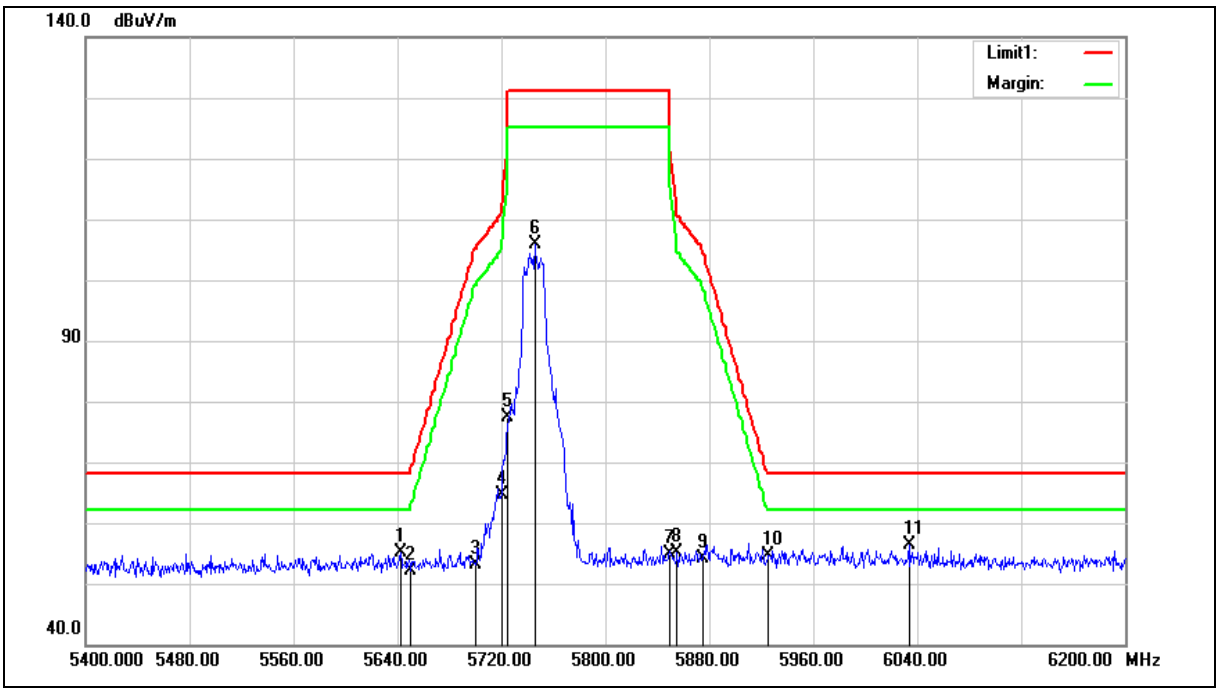

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5642.400	51.13	4.05	55.18	68.20	-13.02	peak
2	5650.000	47.99	4.06	52.05	68.20	-16.15	peak
3	5700.000	48.90	4.15	53.05	105.20	-52.15	peak
4	5720.000	60.38	4.18	64.56	110.80	-46.24	peak
5	5725.000	73.18	4.19	77.37	122.20	-44.83	peak
6	5745.600	101.65	4.22	105.87	--	--	peak
7	5850.000	50.50	4.40	54.90	122.20	-67.30	peak
8	5855.000	50.64	4.41	55.05	110.80	-55.75	peak
9	5875.000	49.69	4.44	54.13	105.20	-51.07	peak
10	5925.000	50.14	4.53	54.67	68.20	-13.53	peak
11	6033.600	51.50	4.76	56.26	68.20	-11.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

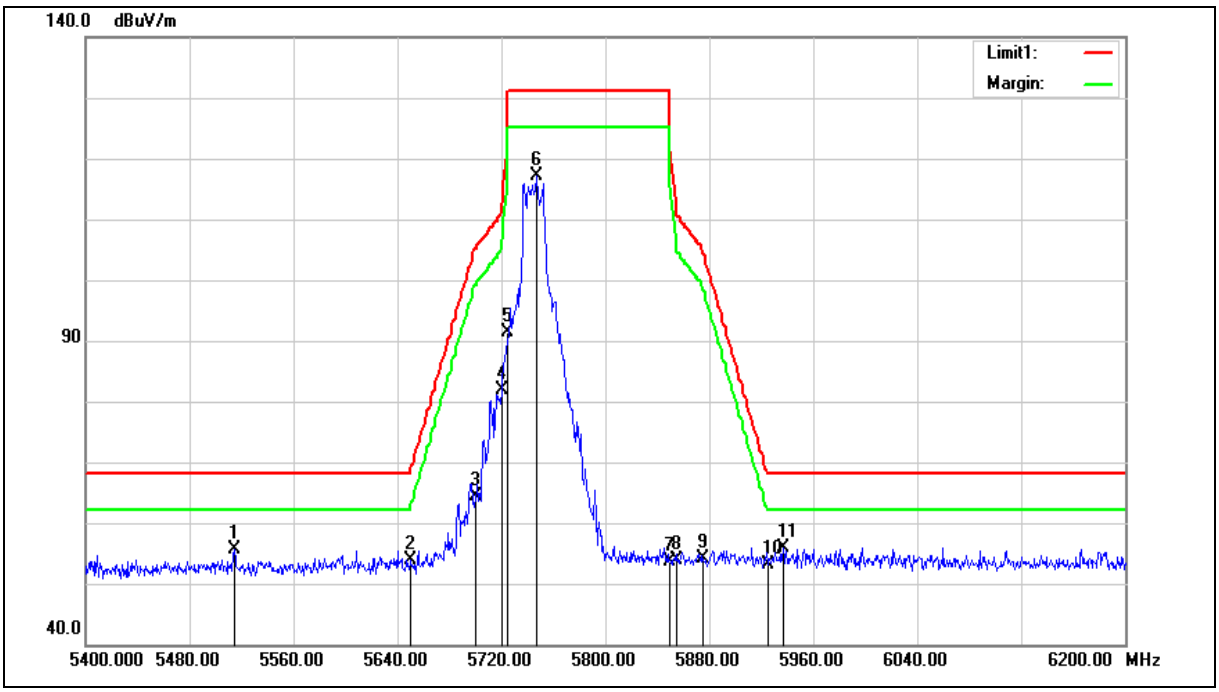

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5514.400	51.73	3.85	55.58	68.20	-12.62	peak
2	5650.000	49.73	4.06	53.79	68.20	-14.41	peak
3	5700.000	60.13	4.15	64.28	105.20	-40.92	peak
4	5720.000	77.75	4.18	81.93	110.80	-28.87	peak
5	5725.000	87.22	4.19	91.41	122.20	-30.79	peak
6	5747.200	112.94	4.23	117.17	--	--	peak
7	5850.000	49.33	4.40	53.73	122.20	-68.47	peak
8	5855.000	49.55	4.41	53.96	110.80	-56.84	peak
9	5875.000	49.62	4.44	54.06	105.20	-51.14	peak
10	5925.000	48.61	4.53	53.14	68.20	-15.06	peak
11	5936.800	51.43	4.54	55.97	68.20	-12.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

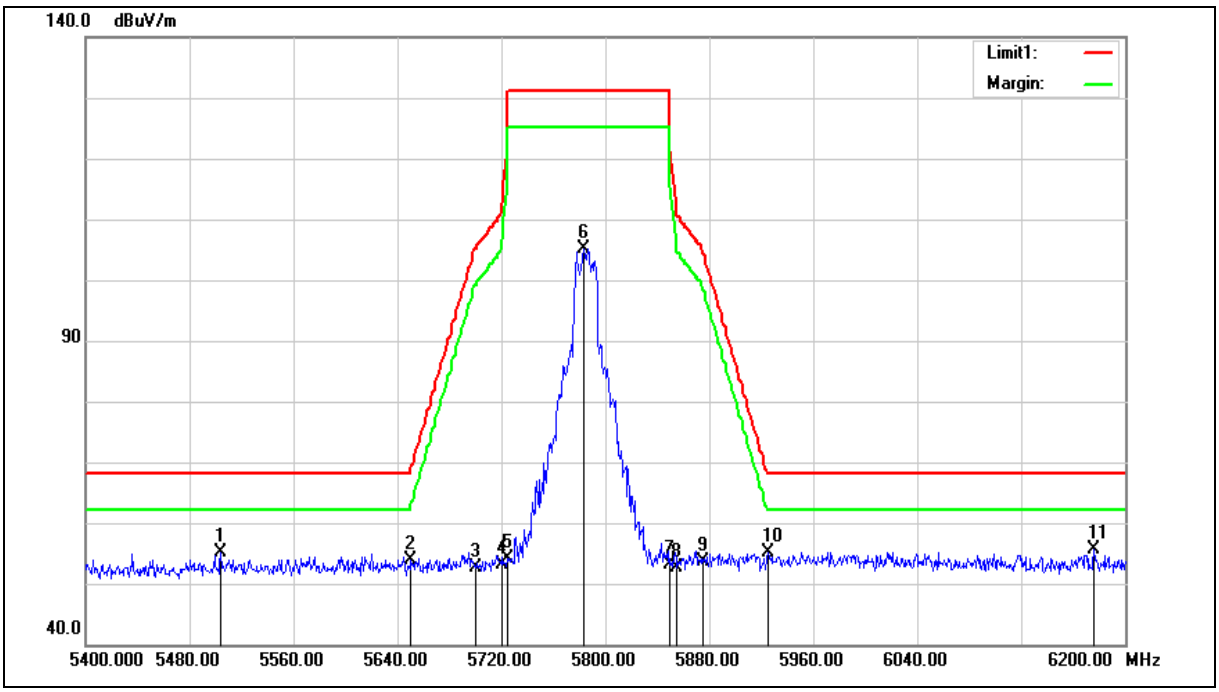

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5504.000	51.20	3.82	55.02	68.20	-13.18	peak
2	5650.000	49.70	4.06	53.76	68.20	-14.44	peak
3	5700.000	48.46	4.15	52.61	105.20	-52.59	peak
4	5720.000	48.83	4.18	53.01	110.80	-57.79	peak
5	5725.000	49.88	4.19	54.07	122.20	-68.13	peak
6	5783.200	100.95	4.29	105.24	--	--	peak
7	5850.000	48.67	4.40	53.07	122.20	-69.13	peak
8	5855.000	48.29	4.41	52.70	110.80	-58.10	peak
9	5875.000	49.28	4.44	53.72	105.20	-51.48	peak
10	5925.000	50.65	4.53	55.18	68.20	-13.02	peak
11	6176.000	50.37	5.23	55.60	68.20	-12.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

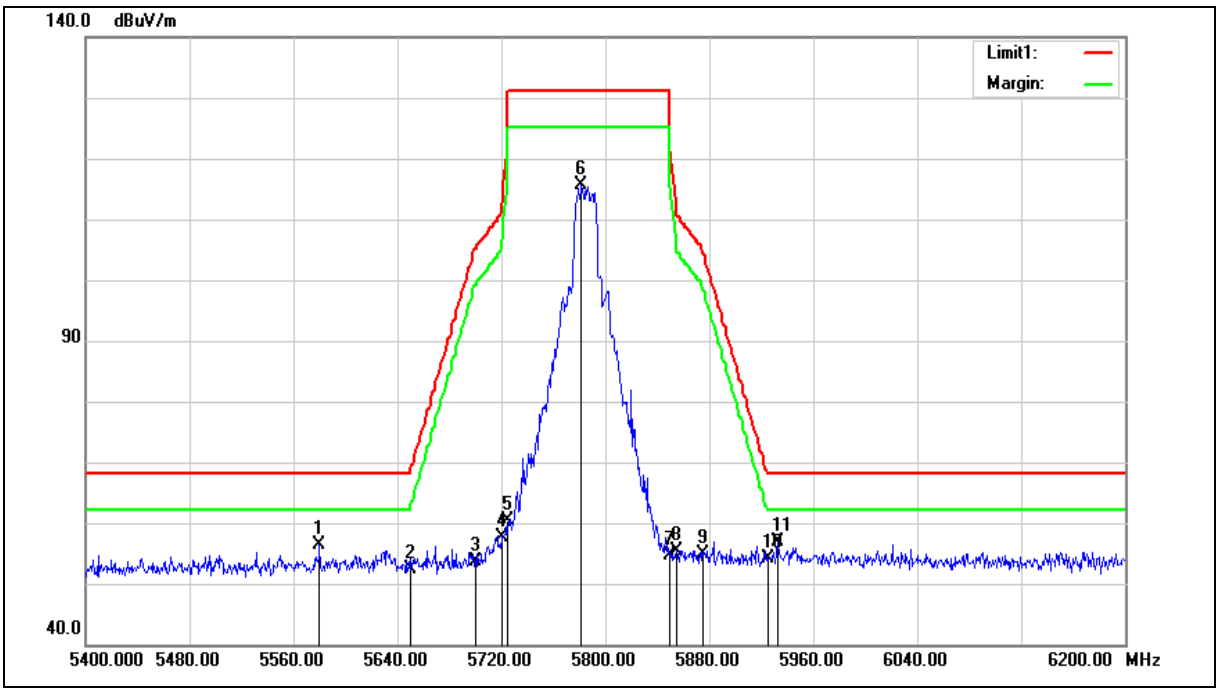

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5580.000	52.53	3.95	56.48	68.20	-11.72	peak
2	5650.000	48.25	4.06	52.31	68.20	-15.89	peak
3	5700.000	49.50	4.15	53.65	105.20	-51.55	peak
4	5720.000	53.42	4.18	57.60	110.80	-53.20	peak
5	5725.000	56.27	4.19	60.46	122.20	-61.74	peak
6	5781.600	111.35	4.29	115.64	--	--	peak
7	5850.000	50.14	4.40	54.54	122.20	-67.66	peak
8	5855.000	50.99	4.41	55.40	110.80	-55.40	peak
9	5875.000	50.55	4.44	54.99	105.20	-50.21	peak
10	5925.000	49.61	4.53	54.14	68.20	-14.06	peak
11	5932.800	52.42	4.54	56.96	68.20	-11.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

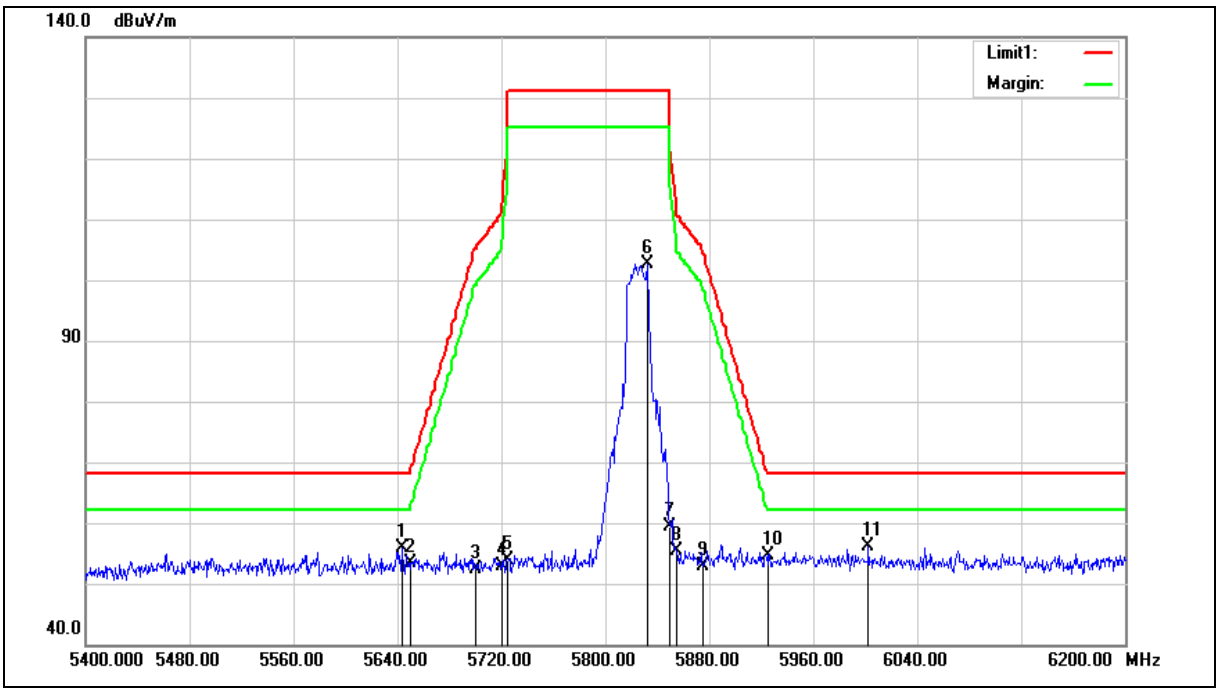

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.200	51.71	4.05	55.76	68.20	-12.44	peak
2	5650.000	49.21	4.06	53.27	68.20	-14.93	peak
3	5700.000	48.27	4.15	52.42	105.20	-52.78	peak
4	5720.000	48.76	4.18	52.94	110.80	-57.86	peak
5	5725.000	49.66	4.19	53.85	122.20	-68.35	peak
6	5832.000	98.37	4.37	102.74	--	--	peak
7	5850.000	54.98	4.40	59.38	122.20	-62.82	peak
8	5855.000	50.86	4.41	55.27	110.80	-55.53	peak
9	5875.000	48.49	4.44	52.93	105.20	-52.27	peak
10	5925.000	50.21	4.53	54.74	68.20	-13.46	peak
11	6002.400	51.55	4.66	56.21	68.20	-11.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

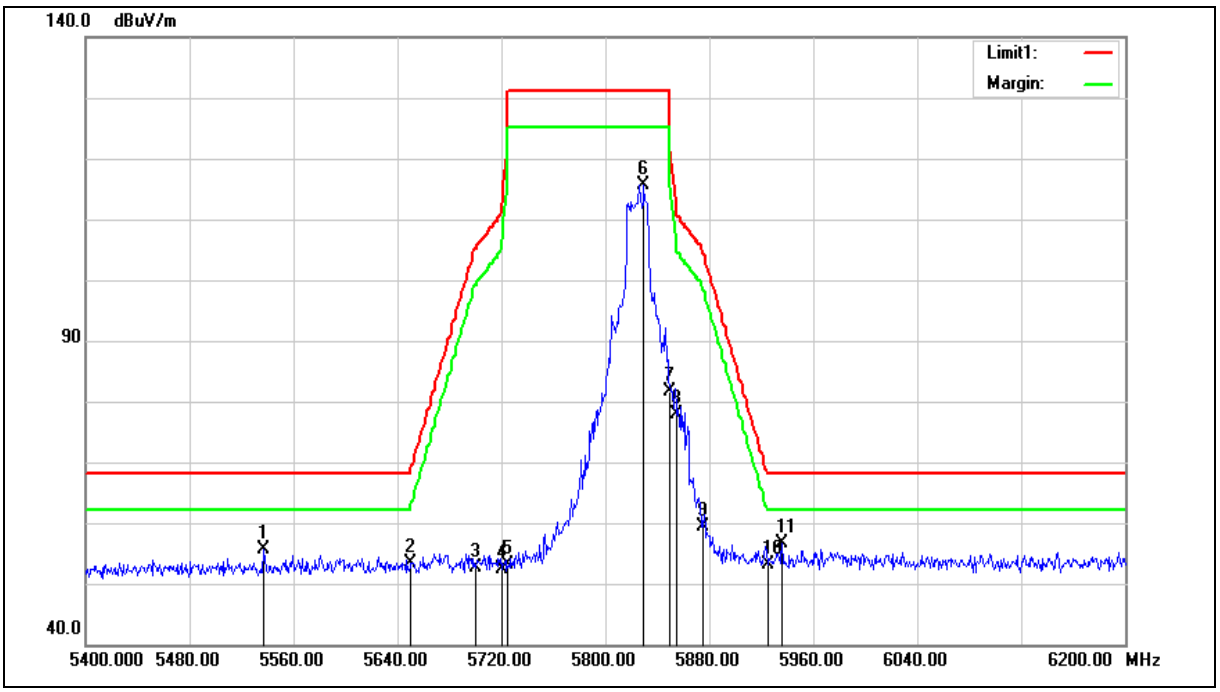

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5536.800	51.64	3.88	55.52	68.20	-12.68	peak
2	5650.000	49.40	4.06	53.46	68.20	-14.74	peak
3	5700.000	48.45	4.15	52.60	105.20	-52.60	peak
4	5720.000	48.31	4.18	52.49	110.80	-58.31	peak
5	5725.000	48.82	4.19	53.01	122.20	-69.19	peak
6	5829.600	111.37	4.37	115.74	--	--	peak
7	5850.000	77.35	4.40	81.75	122.20	-40.45	peak
8	5855.000	73.51	4.41	77.92	110.80	-32.88	peak
9	5875.000	55.04	4.44	59.48	105.20	-45.72	peak
10	5925.000	48.49	4.53	53.02	68.20	-15.18	peak
11	5936.000	52.03	4.54	56.57	68.20	-11.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

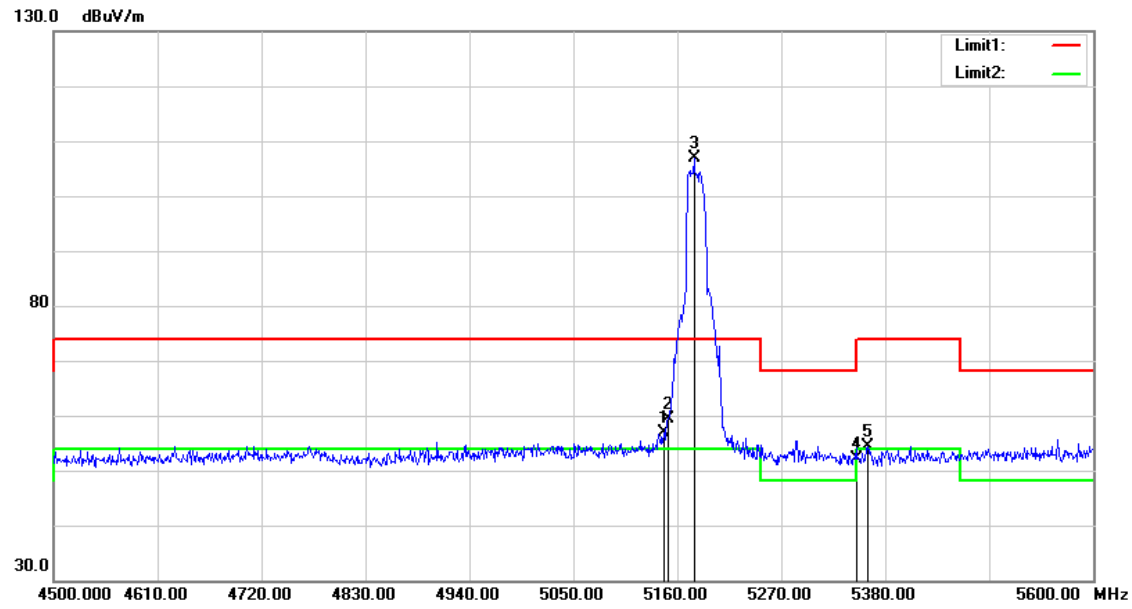


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	53.62	3.35	56.97	74.00	-17.03	peak
2	5150.000	55.93	3.35	59.28	74.00	-14.72	peak
3	5177.600	103.49	3.39	106.88	--	--	peak
4	5350.000	48.55	3.62	52.17	74.00	-21.83	peak
5	5361.300	50.71	3.63	54.34	74.00	-19.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

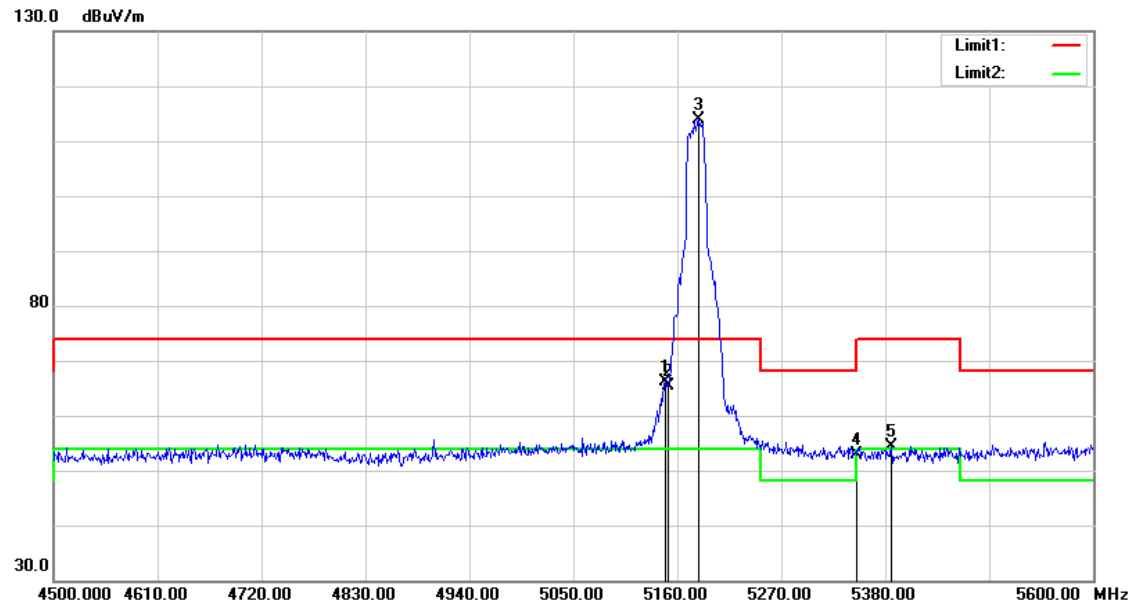


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.900	62.71	3.35	66.06	74.00	-7.94	peak
2	5150.000	62.08	3.35	65.43	74.00	-8.57	peak
3	5182.000	110.48	3.40	113.88	--	--	peak
4	5350.000	49.28	3.62	52.90	74.00	-21.10	peak
5	5386.600	50.68	3.67	54.35	74.00	-19.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

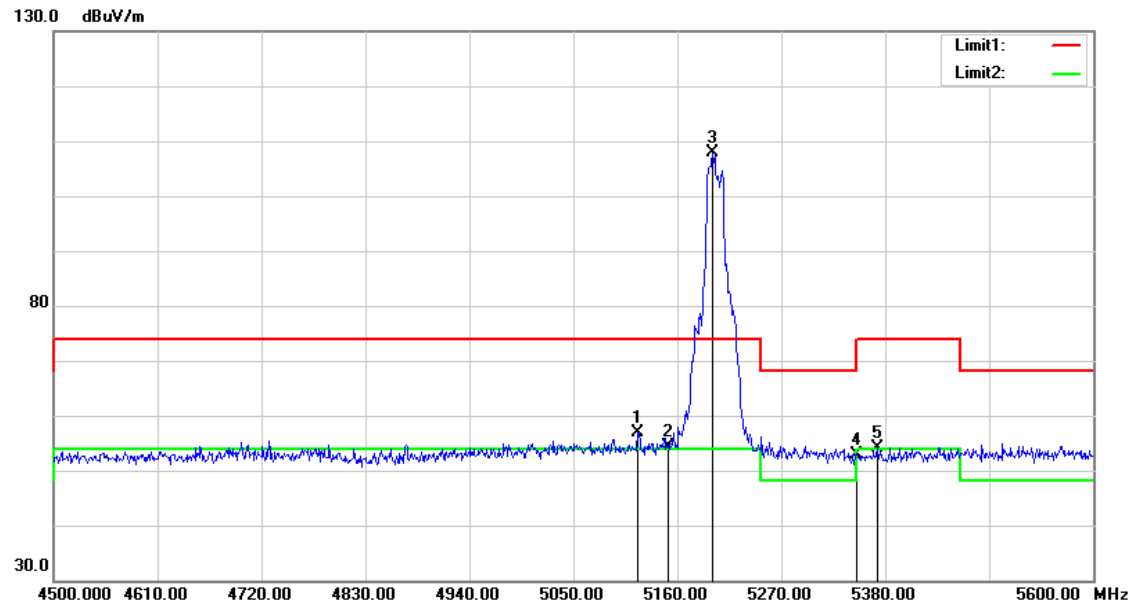


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.200	53.65	3.31	56.96	74.00	-17.04	peak
2	5150.000	50.99	3.35	54.34	74.00	-19.66	peak
3	5197.400	104.52	3.41	107.93	--	--	peak
4	5350.000	49.38	3.62	53.00	74.00	-21.00	peak
5	5371.200	50.56	3.65	54.21	74.00	-19.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

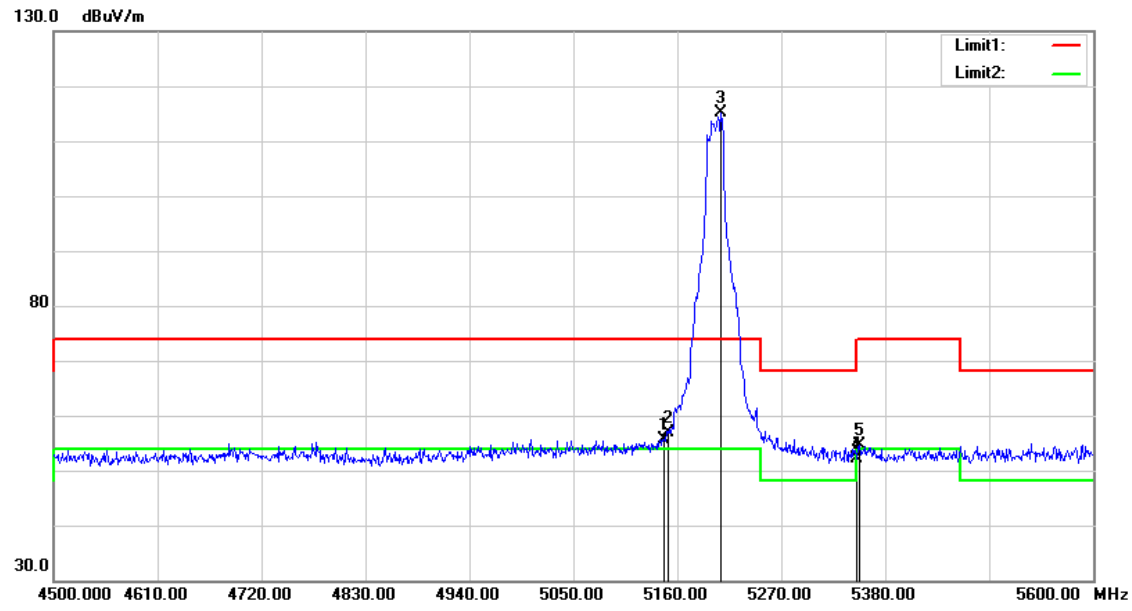


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	52.32	3.35	55.67	74.00	-18.33	peak
2	5150.000	53.48	3.35	56.83	74.00	-17.17	peak
3	5206.200	111.77	3.42	115.19	--	--	peak
4	5350.000	48.46	3.62	52.08	74.00	-21.92	peak
5	5352.500	50.97	3.62	54.59	74.00	-19.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

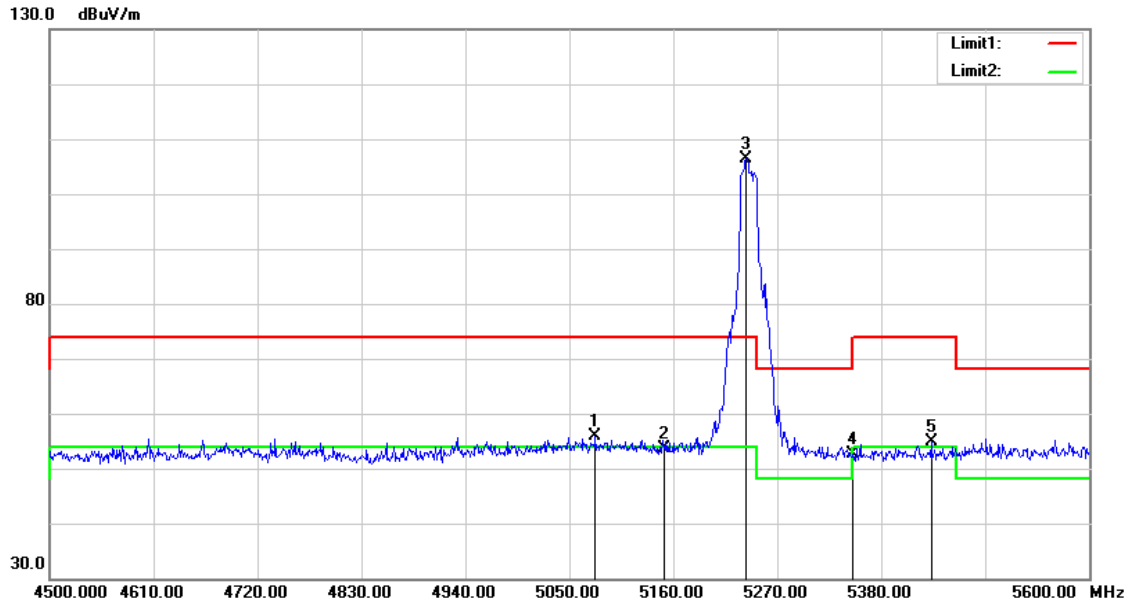


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	52.72	3.25	55.97	74.00	-18.03	peak
2	5150.000	50.21	3.35	53.56	74.00	-20.44	peak
3	5237.000	103.01	3.46	106.47	--	--	peak
4	5350.000	49.07	3.62	52.69	74.00	-21.31	peak
5	5432.800	51.12	3.73	54.85	74.00	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

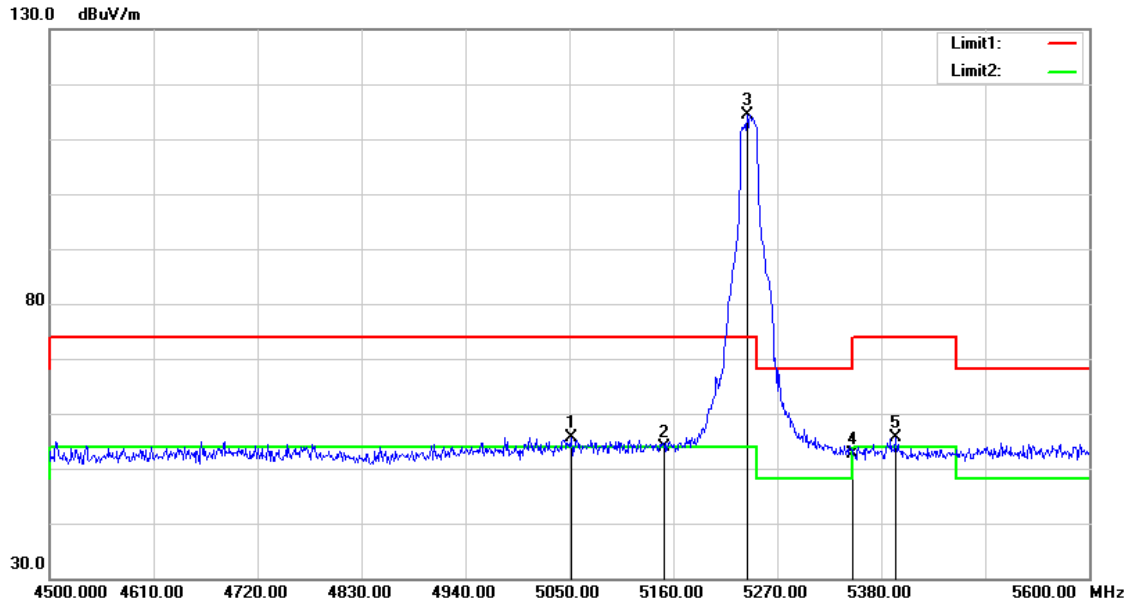


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.200	52.50	3.22	55.72	74.00	-18.28	peak
2	5150.000	50.52	3.35	53.87	74.00	-20.13	peak
3	5238.100	110.93	3.46	114.39	--	--	peak
4	5350.000	48.93	3.62	52.55	74.00	-21.45	peak
5	5395.400	51.89	3.68	55.57	74.00	-18.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

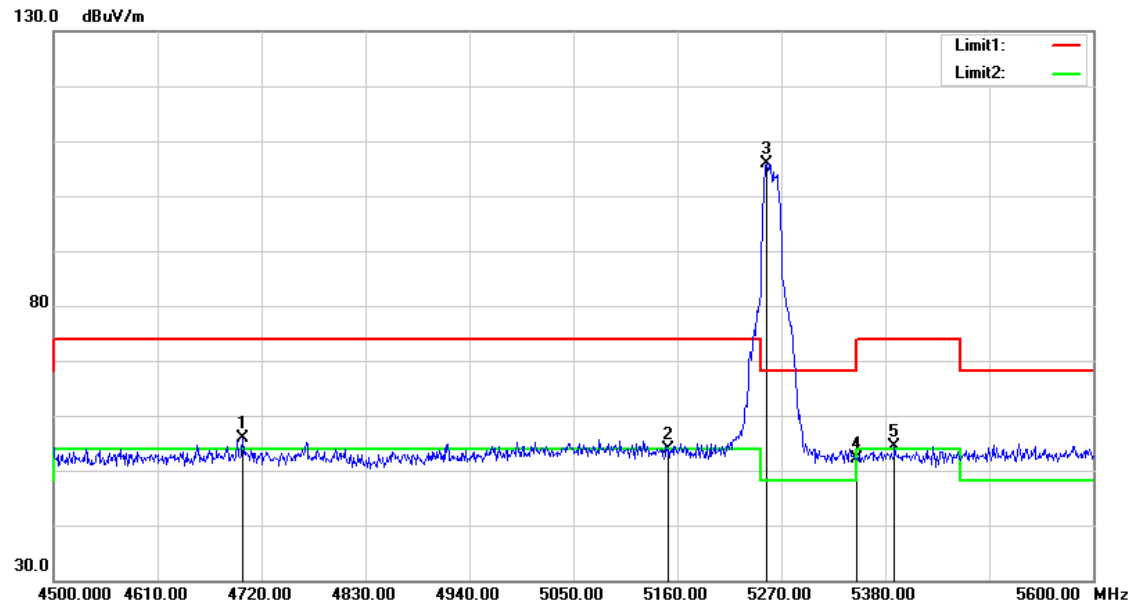


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4700.200	53.54	2.42	55.96	74.00	-18.04	peak
2	5150.000	50.53	3.35	53.88	74.00	-20.12	peak
3	5254.600	102.42	3.48	105.90	--	--	peak
4	5350.000	48.56	3.62	52.18	74.00	-21.82	peak
5	5389.900	50.61	3.67	54.28	74.00	-19.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

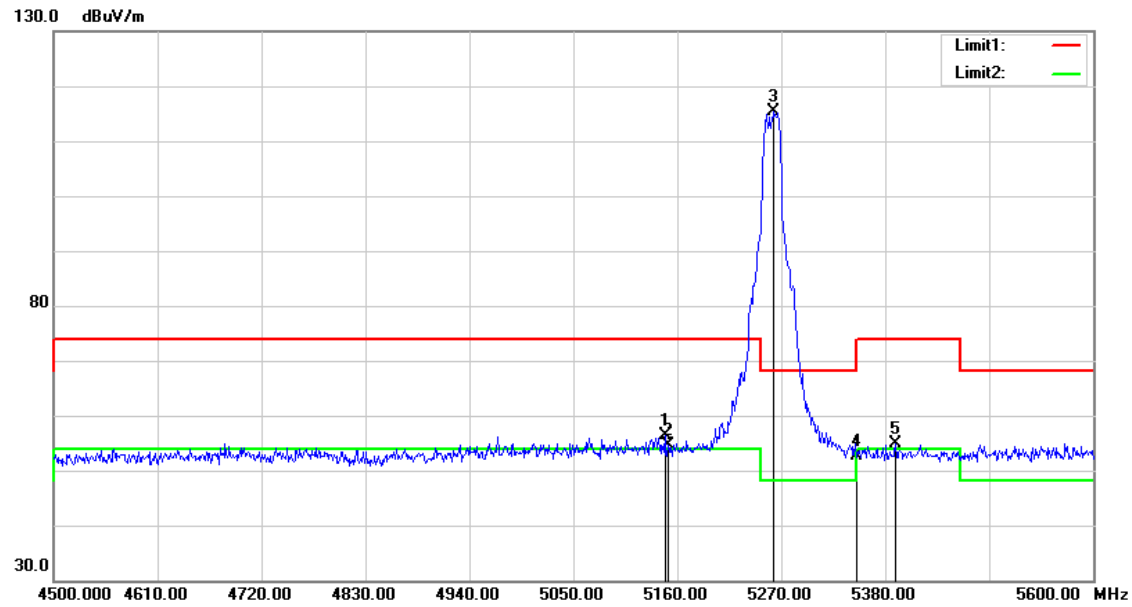


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	52.94	3.35	56.29	74.00	-17.71	peak
2	5150.000	51.21	3.35	54.56	74.00	-19.44	peak
3	5262.300	111.99	3.50	115.49	--	--	peak
4	5350.000	49.04	3.62	52.66	74.00	-21.34	peak
5	5391.000	51.09	3.67	54.76	74.00	-19.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

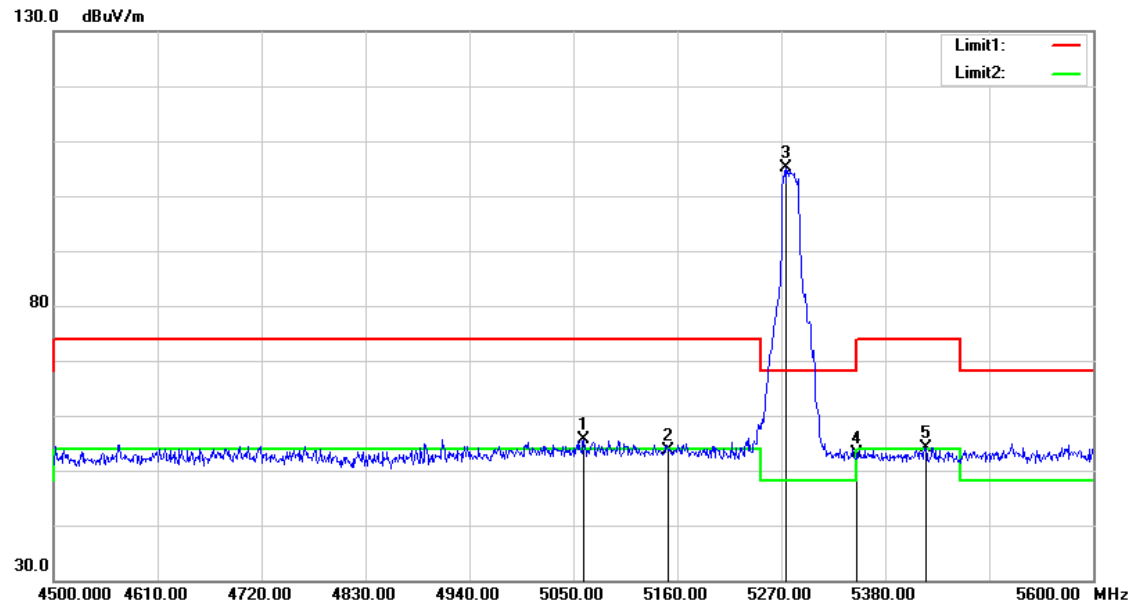


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.000	52.31	3.23	55.54	74.00	-18.46	peak
2	5150.000	50.19	3.35	53.54	74.00	-20.46	peak
3	5275.500	101.66	3.51	105.17	--	--	peak
4	5350.000	49.50	3.62	53.12	74.00	-20.88	peak
5	5422.900	50.52	3.71	54.23	74.00	-19.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

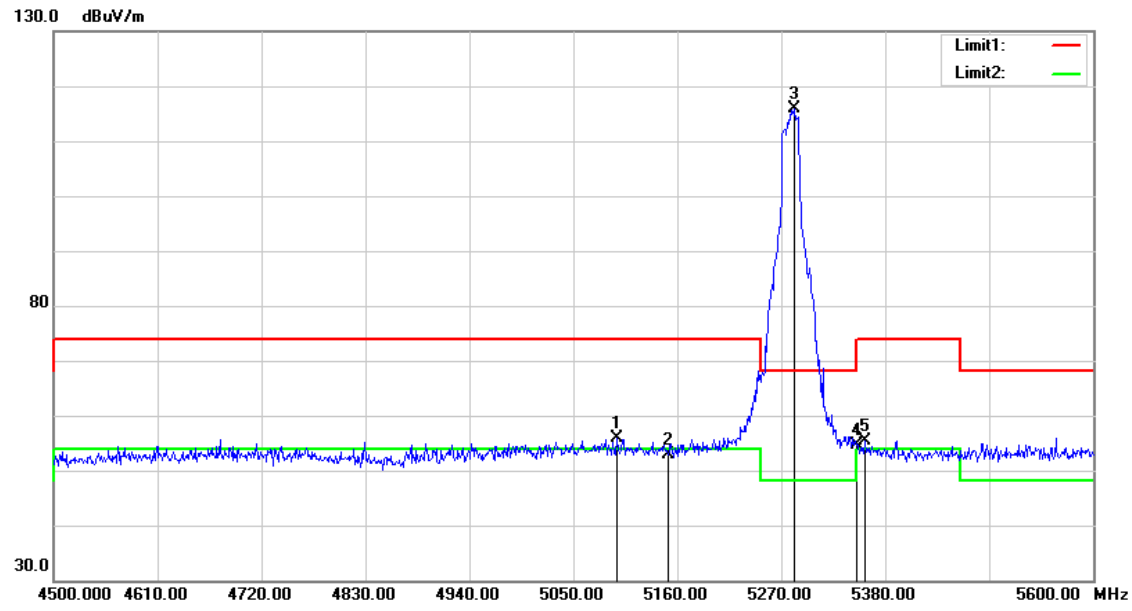


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5096.200	52.64	3.28	55.92	74.00	-18.08	peak
2	5150.000	49.52	3.35	52.87	74.00	-21.13	peak
3	5284.300	112.45	3.53	115.98	--	--	peak
4	5350.000	51.11	3.62	54.73	74.00	-19.27	peak
5	5358.000	51.84	3.63	55.47	74.00	-18.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

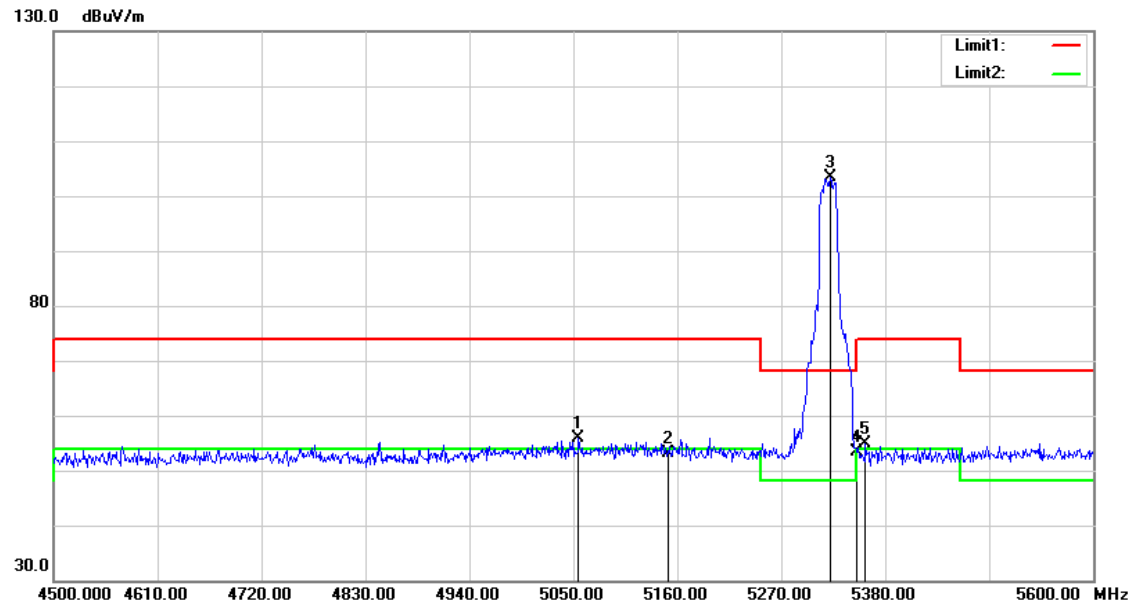


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.500	52.54	3.22	55.76	74.00	-18.24	peak
2	5150.000	49.71	3.35	53.06	74.00	-20.94	peak
3	5321.700	99.83	3.58	103.41	--	--	peak
4	5350.000	49.75	3.62	53.37	74.00	-20.63	peak
5	5359.100	51.27	3.63	54.90	74.00	-19.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

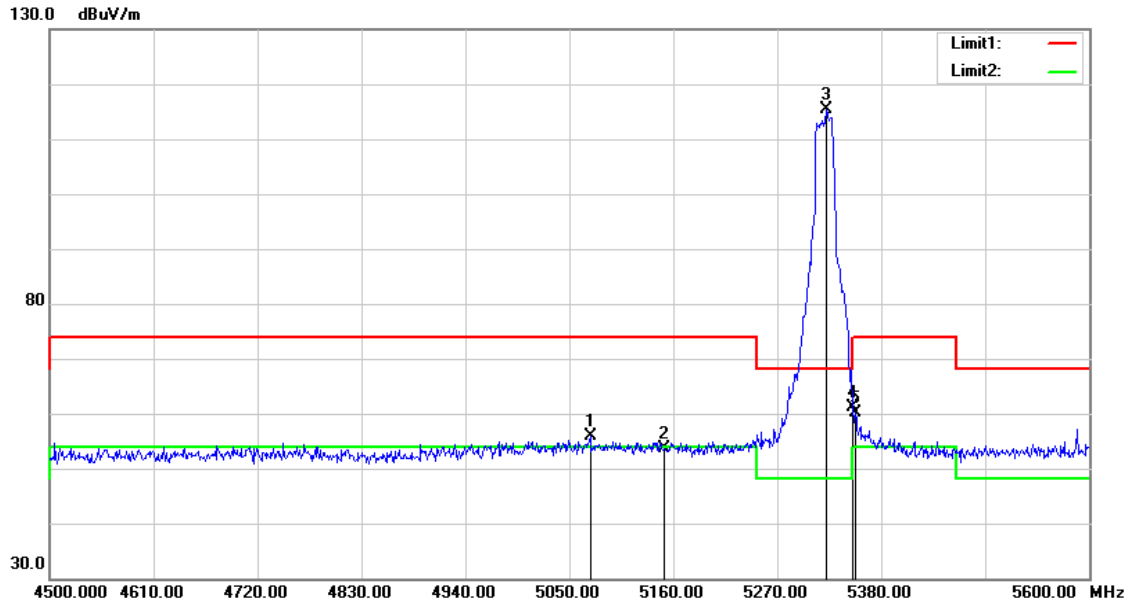


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5072.000	52.53	3.24	55.77	74.00	-18.23	peak
2	5150.000	50.25	3.35	53.60	74.00	-20.40	peak
3	5321.700	111.69	3.58	115.27	--	--	peak
4	5350.000	57.61	3.62	61.23	74.00	-12.77	peak
5	5352.500	56.61	3.62	60.23	74.00	-13.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

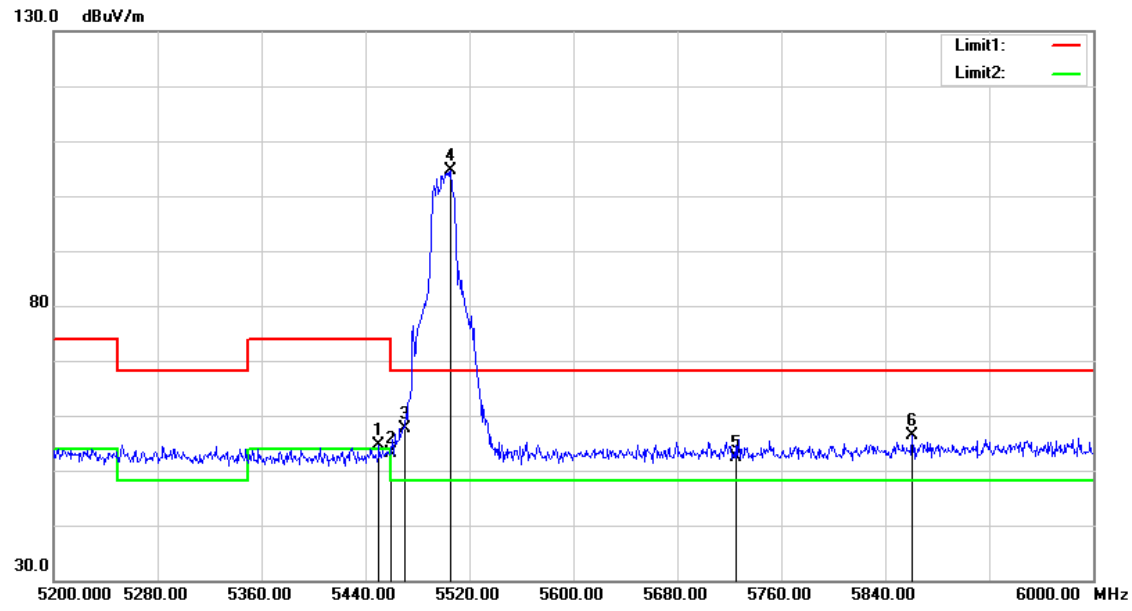


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.400	50.96	3.75	54.71	74.00	-19.29	peak
2	5460.000	49.33	3.76	53.09	74.00	-20.91	peak
3	5470.000	53.97	3.78	57.75	68.20	-10.45	peak
4	5505.600	100.78	3.83	104.61	--	--	peak
5	5725.000	48.28	4.19	52.47	68.20	-15.73	peak
6	5860.800	51.94	4.41	56.35	68.20	-11.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

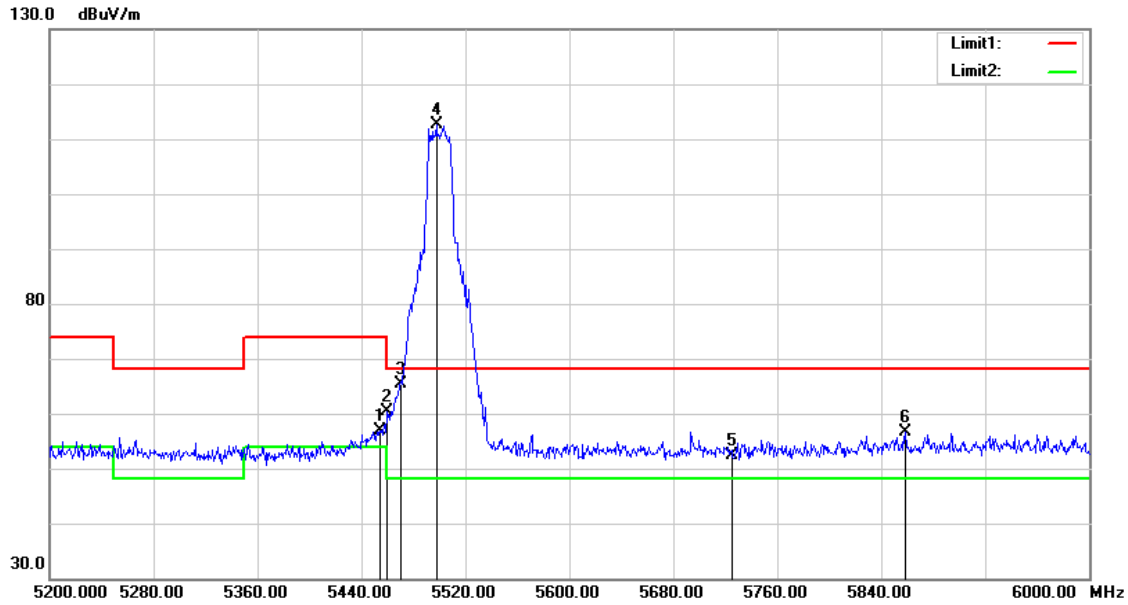


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	53.15	3.75	56.90	74.00	-17.10	peak
2	5460.000	56.63	3.76	60.39	74.00	-13.61	peak
3	5470.000	61.48	3.78	65.26	68.20	-2.94	peak
4	5497.600	108.80	3.81	112.61	--	--	peak
5	5725.000	48.26	4.19	52.45	68.20	-15.75	peak
6	5858.400	52.21	4.41	56.62	68.20	-11.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

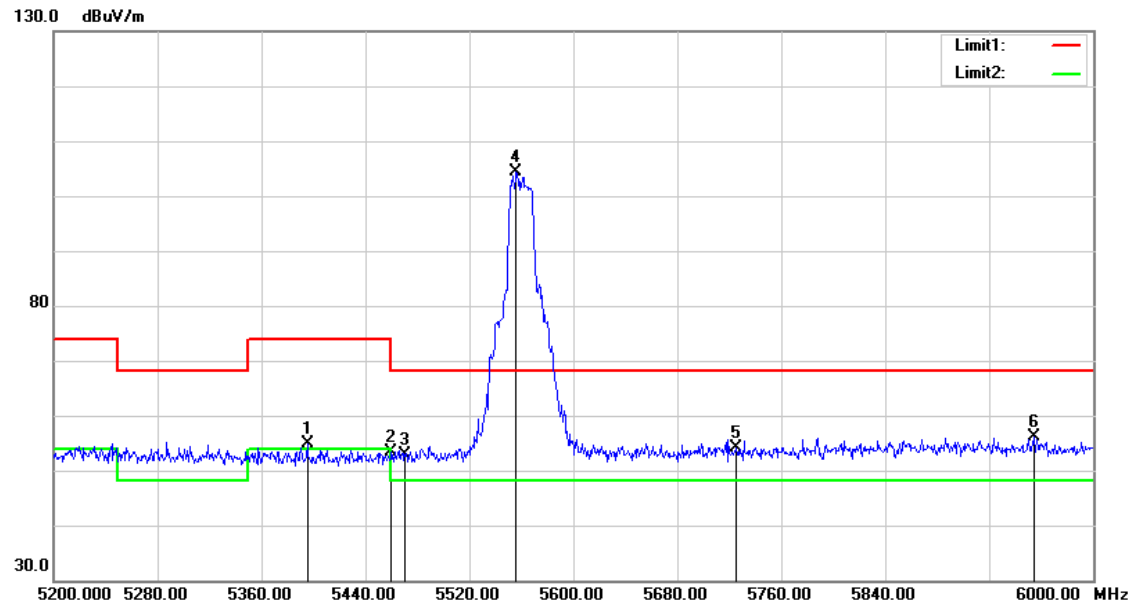


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5395.200	51.13	3.68	54.81	74.00	-19.19	peak
2	5460.000	49.65	3.76	53.41	74.00	-20.59	peak
3	5470.000	49.00	3.78	52.78	68.20	-15.42	peak
4	5556.000	100.44	3.91	104.35	--	--	peak
5	5725.000	49.94	4.19	54.13	68.20	-14.07	peak
6	5954.400	51.46	4.58	56.04	68.20	-12.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

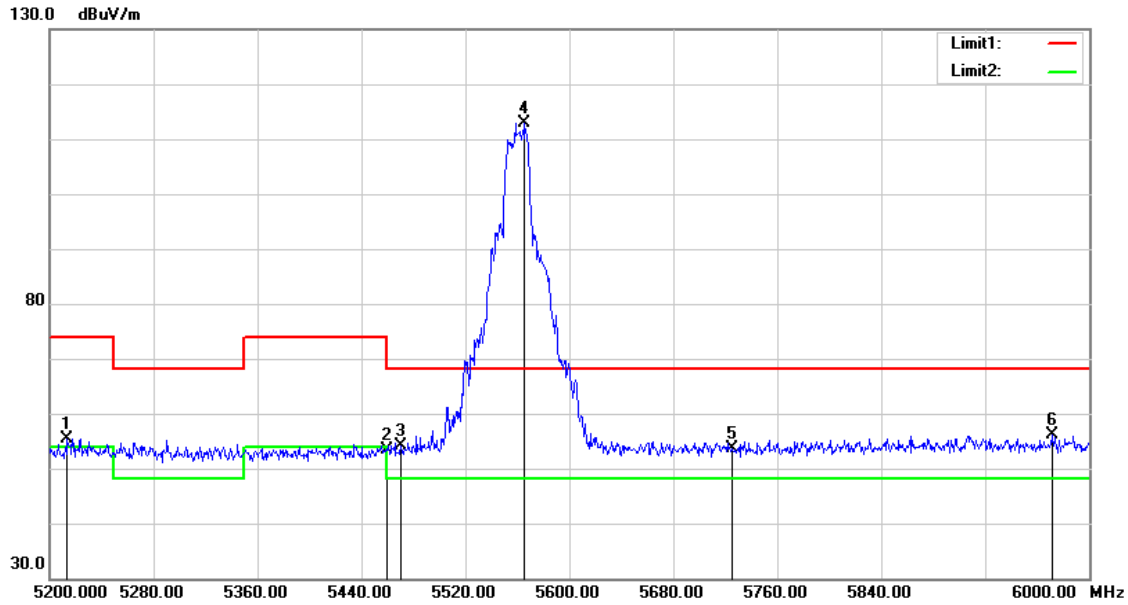


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5213.600	52.06	3.43	55.49	74.00	-18.51	peak
2	5460.000	49.61	3.76	53.37	74.00	-20.63	peak
3	5470.000	50.34	3.78	54.12	68.20	-14.08	peak
4	5565.600	108.97	3.93	112.90	--	--	peak
5	5725.000	49.33	4.19	53.52	68.20	-14.68	peak
6	5971.200	51.52	4.61	56.13	68.20	-12.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

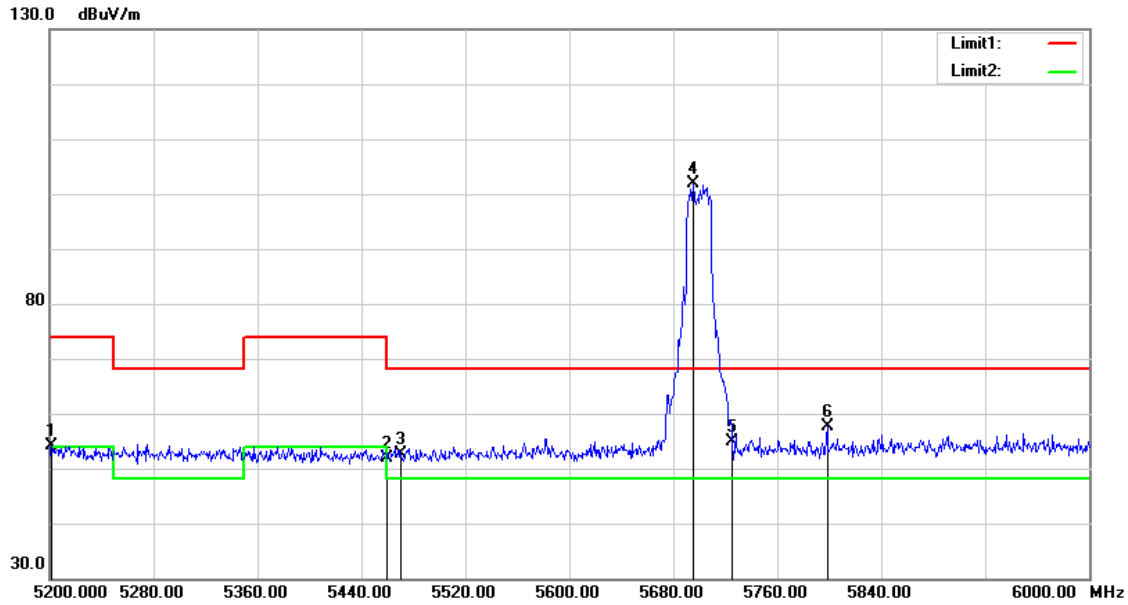


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5201.600	50.69	3.42	54.11	74.00	-19.89	peak
2	5460.000	48.11	3.76	51.87	74.00	-22.13	peak
3	5470.000	48.91	3.78	52.69	68.20	-15.51	peak
4	5695.200	97.64	4.13	101.77	--	--	peak
5	5725.000	50.67	4.19	54.86	68.20	-13.34	peak
6	5798.400	53.29	4.32	57.61	68.20	-10.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

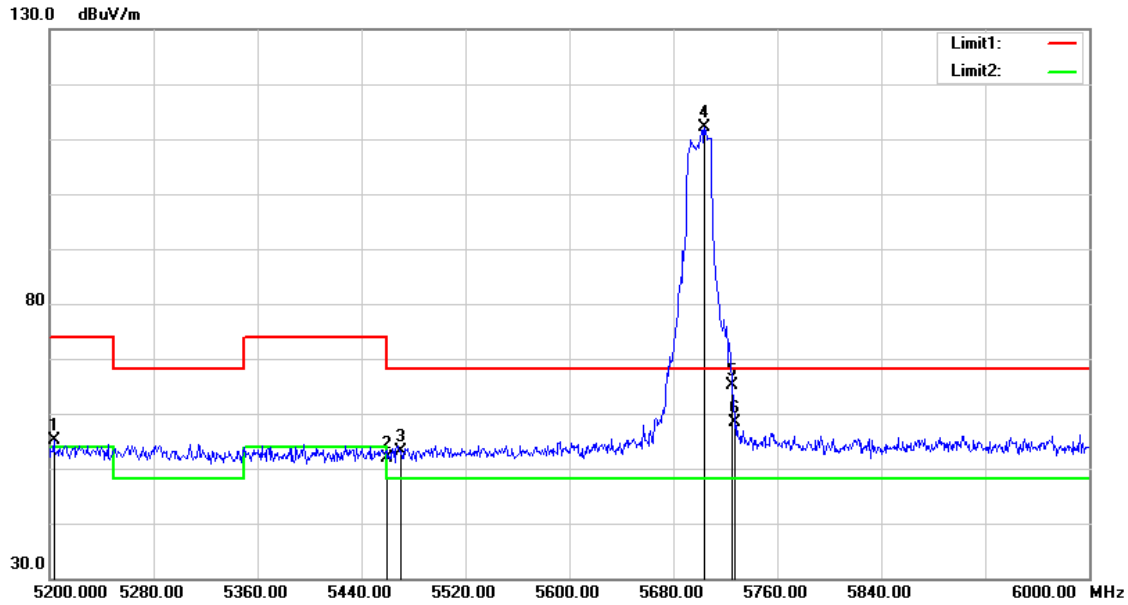


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5203.200	51.75	3.42	55.17	74.00	-18.83	peak
2	5460.000	48.00	3.76	51.76	74.00	-22.24	peak
3	5470.000	49.38	3.78	53.16	68.20	-15.04	peak
4	5704.000	107.89	4.16	112.05	--	--	peak
5	5725.000	60.86	4.19	65.05	68.20	-3.15	peak
6	5727.200	54.28	4.20	58.48	68.20	-9.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

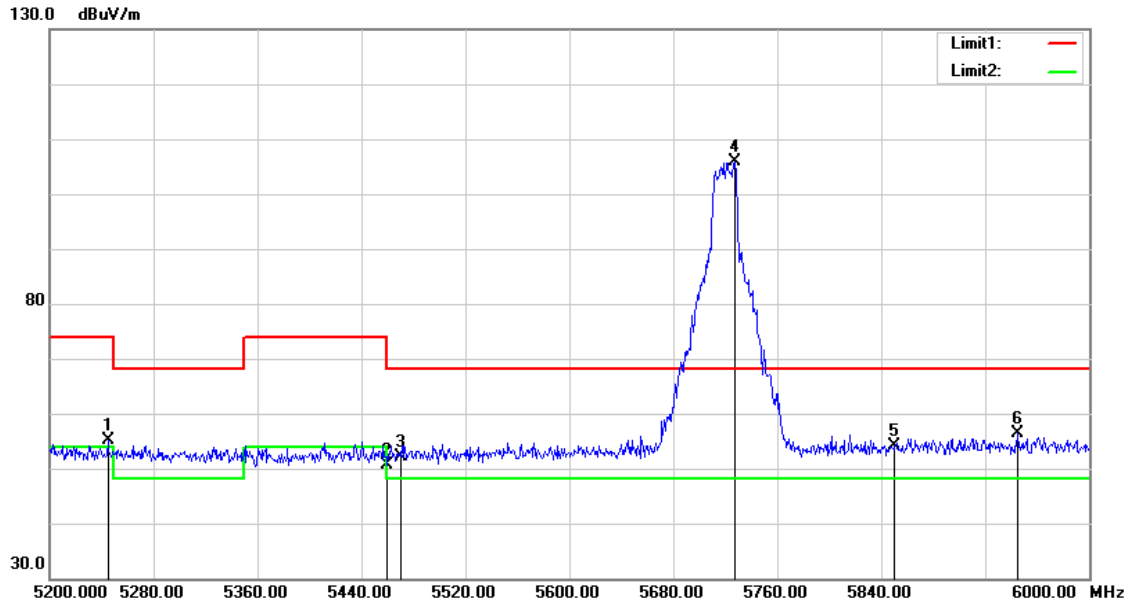


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5244.800	51.54	3.48	55.02	74.00	-18.98	peak
2	5460.000	46.86	3.76	50.62	74.00	-23.38	peak
3	5470.000	48.45	3.78	52.23	68.20	-15.97	peak
4	5727.200	101.68	4.20	105.88	--	--	peak
5	5850.000	49.82	4.40	54.22	68.20	-13.98	peak
6	5944.800	51.80	4.56	56.36	68.20	-11.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

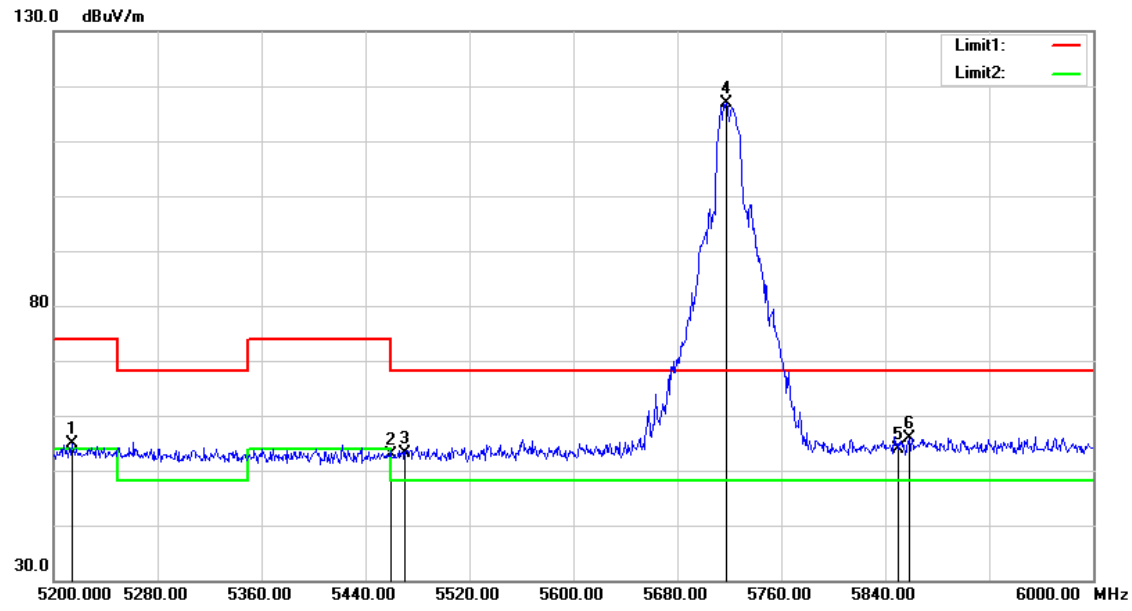


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5214.400	51.49	3.43	54.92	74.00	-19.08	peak
2	5460.000	49.01	3.76	52.77	74.00	-21.23	peak
3	5470.000	49.44	3.78	53.22	68.20	-14.98	peak
4	5717.600	112.73	4.18	116.91	--	--	peak
5	5850.000	49.55	4.40	53.95	68.20	-14.25	peak
6	5858.400	51.41	4.41	55.82	68.20	-12.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

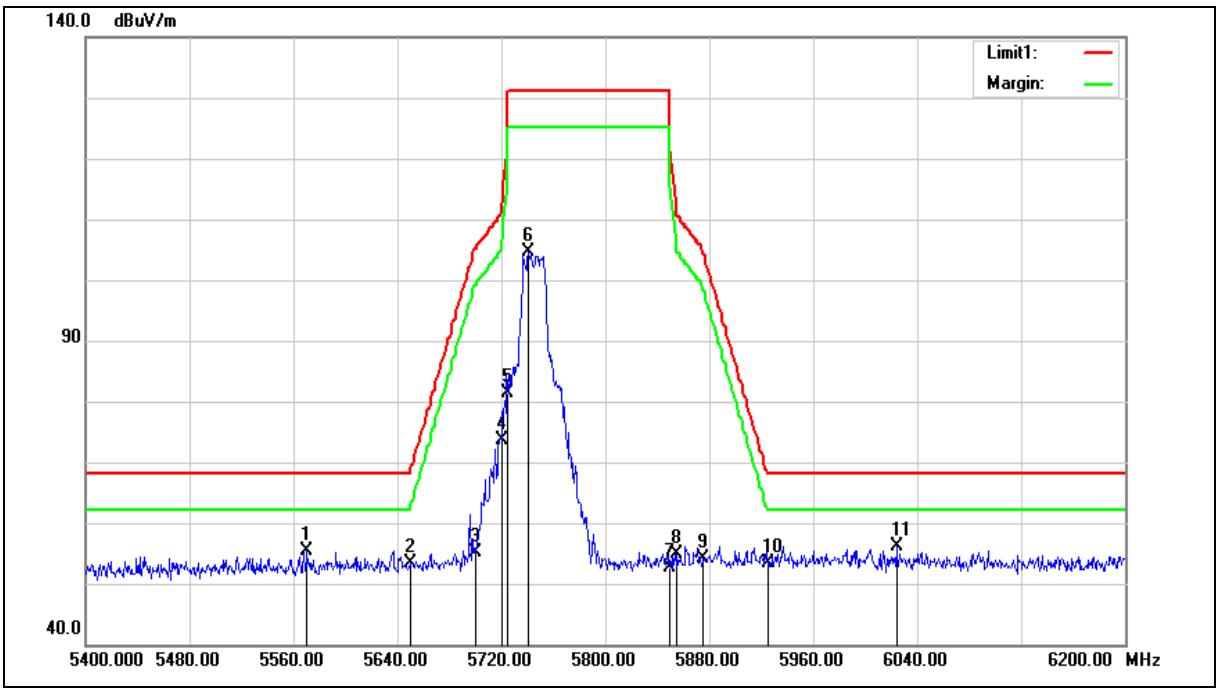

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5570.400	51.46	3.93	55.39	68.20	-12.81	peak
2	5650.000	49.36	4.06	53.42	68.20	-14.78	peak
3	5700.000	51.09	4.15	55.24	105.20	-49.96	peak
4	5720.000	69.54	4.18	73.72	110.80	-37.08	peak
5	5725.000	77.21	4.19	81.40	122.20	-40.80	peak
6	5740.800	100.49	4.22	104.71	--	--	peak
7	5850.000	48.32	4.40	52.72	122.20	-69.48	peak
8	5855.000	50.59	4.41	55.00	110.80	-55.80	peak
9	5875.000	49.59	4.44	54.03	105.20	-51.17	peak
10	5925.000	48.85	4.53	53.38	68.20	-14.82	peak
11	6024.000	51.48	4.73	56.21	68.20	-11.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

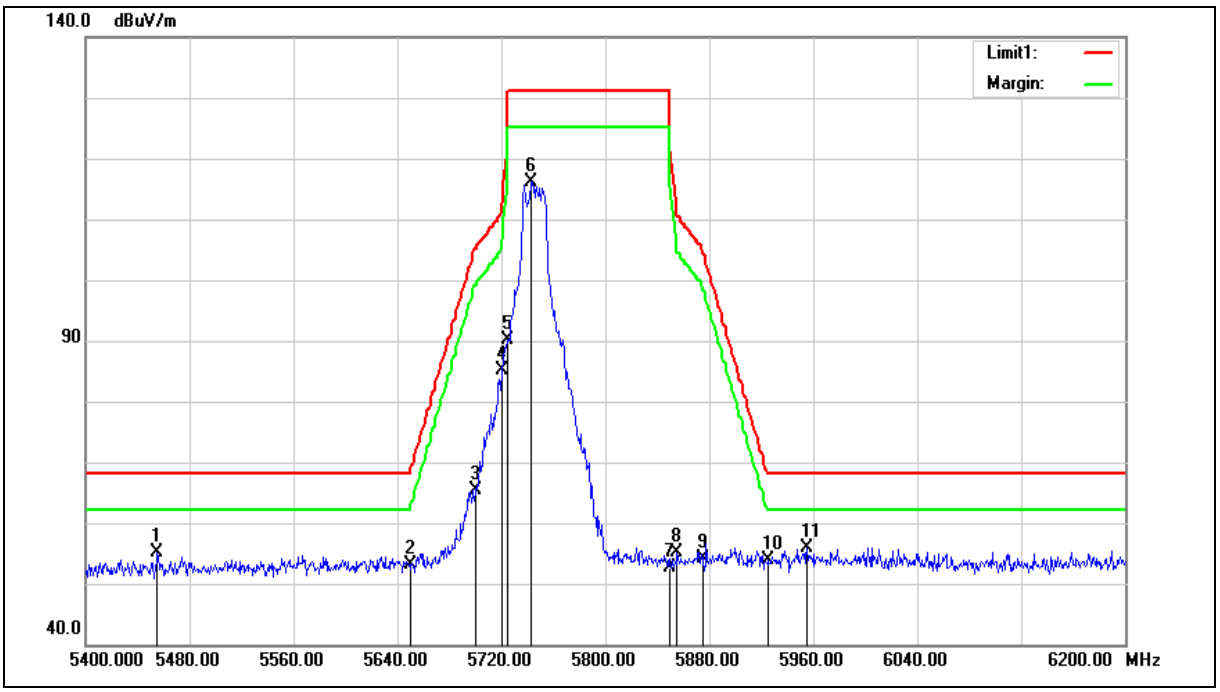

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.200	51.34	3.75	55.09	68.20	-13.11	peak
2	5650.000	49.18	4.06	53.24	68.20	-14.96	peak
3	5700.000	61.30	4.15	65.45	105.20	-39.75	peak
4	5720.000	81.04	4.18	85.22	110.80	-25.58	peak
5	5725.000	86.06	4.19	90.25	122.20	-31.95	peak
6	5743.200	111.82	4.22	116.04	--	--	peak
7	5850.000	48.33	4.40	52.73	122.20	-69.47	peak
8	5855.000	50.78	4.41	55.19	110.80	-55.61	peak
9	5875.000	49.59	4.44	54.03	105.20	-51.17	peak
10	5925.000	49.27	4.53	53.80	68.20	-14.40	peak
11	5955.200	51.38	4.58	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

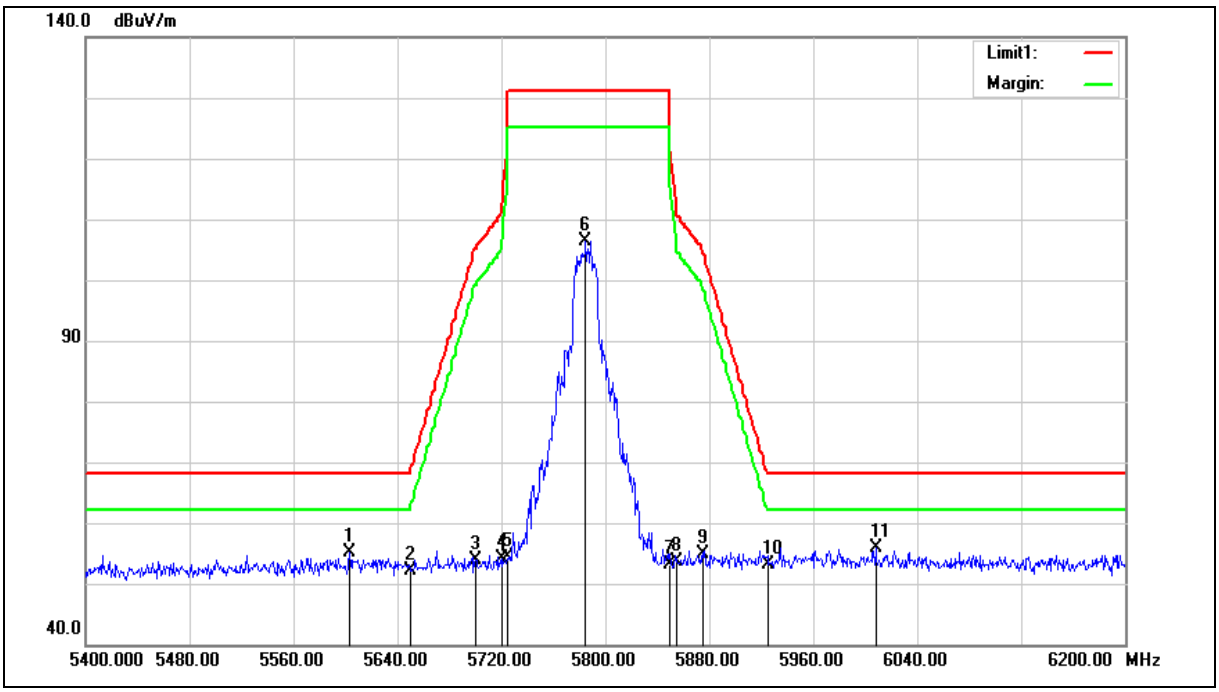

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5603.200	51.21	3.98	55.19	68.20	-13.01	peak
2	5650.000	48.16	4.06	52.22	68.20	-15.98	peak
3	5700.000	49.62	4.15	53.77	105.20	-51.43	peak
4	5720.000	50.04	4.18	54.22	110.80	-56.58	peak
5	5725.000	50.22	4.19	54.41	122.20	-67.79	peak
6	5784.800	102.15	4.29	106.44	--	--	peak
7	5850.000	48.82	4.40	53.22	122.20	-68.98	peak
8	5855.000	49.11	4.41	53.52	110.80	-57.28	peak
9	5875.000	50.51	4.44	54.95	105.20	-50.25	peak
10	5925.000	48.50	4.53	53.03	68.20	-15.17	peak
11	6008.000	51.20	4.67	55.87	68.20	-12.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

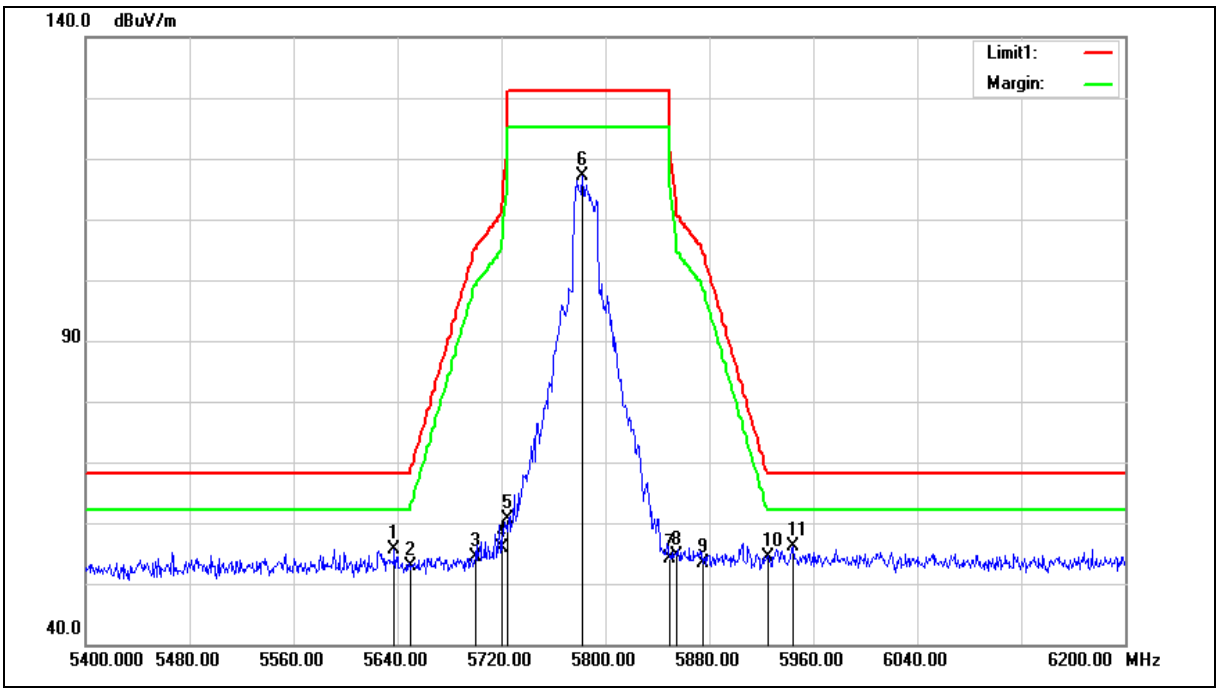

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5637.600	51.52	4.05	55.57	68.20	-12.63	peak
2	5650.000	48.87	4.06	52.93	68.20	-15.27	peak
3	5700.000	50.34	4.15	54.49	105.20	-50.71	peak
4	5720.000	51.79	4.18	55.97	110.80	-54.83	peak
5	5725.000	56.36	4.19	60.55	122.20	-61.65	peak
6	5782.400	112.85	4.29	117.14	--	--	peak
7	5850.000	49.84	4.40	54.24	122.20	-67.96	peak
8	5855.000	50.29	4.41	54.70	110.80	-56.10	peak
9	5875.000	48.99	4.44	53.43	105.20	-51.77	peak
10	5925.000	49.78	4.53	54.31	68.20	-13.89	peak
11	5944.000	51.57	4.56	56.13	68.20	-12.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

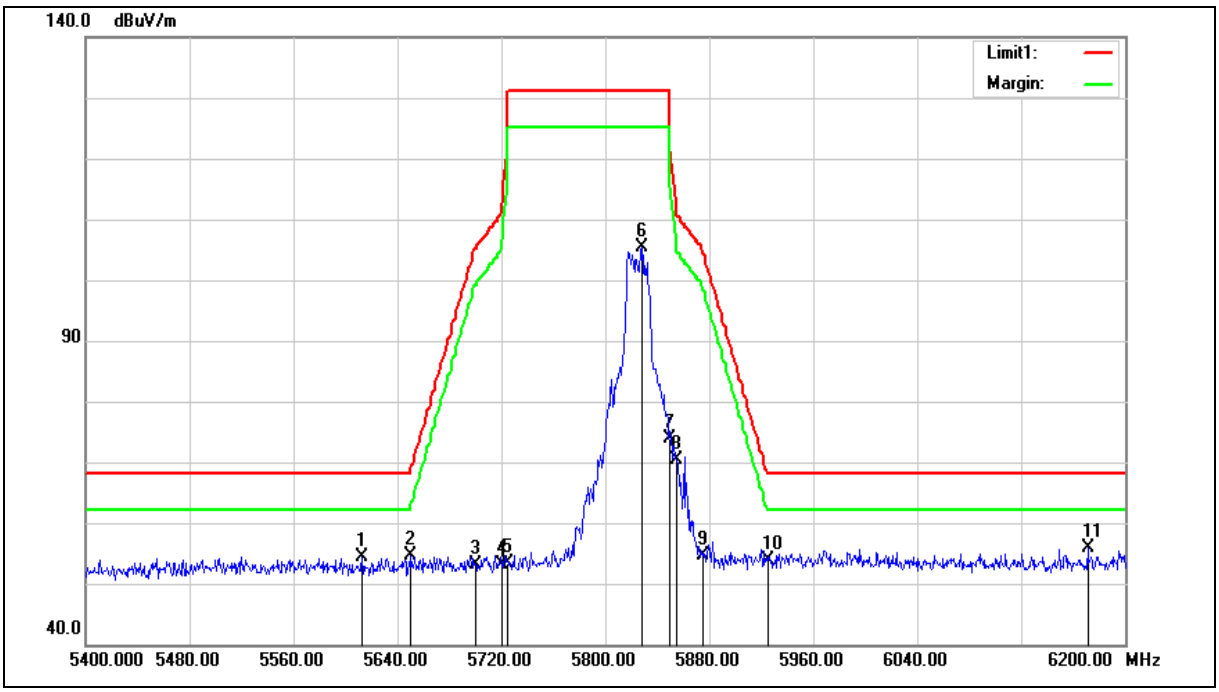

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5612.800	50.32	4.01	54.33	68.20	-13.87	peak
2	5650.000	50.65	4.06	54.71	68.20	-13.49	peak
3	5700.000	49.03	4.15	53.18	105.20	-52.02	peak
4	5720.000	48.85	4.18	53.03	110.80	-57.77	peak
5	5725.000	49.14	4.19	53.33	122.20	-68.87	peak
6	5828.000	100.98	4.36	105.34	--	--	peak
7	5850.000	69.60	4.40	74.00	122.20	-48.20	peak
8	5855.000	65.91	4.41	70.32	110.80	-40.48	peak
9	5875.000	50.30	4.44	54.74	105.20	-50.46	peak
10	5925.000	49.44	4.53	53.97	68.20	-14.23	peak
11	6171.200	50.74	5.21	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

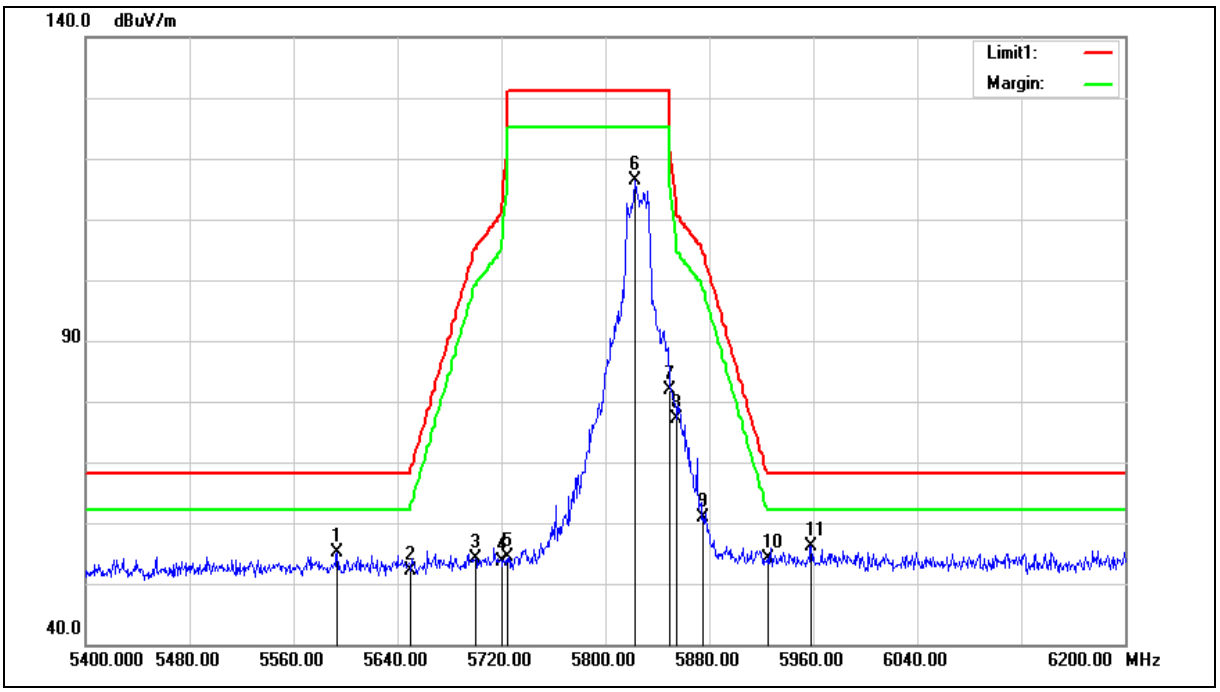

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5593.600	51.13	3.97	55.10	68.20	-13.10	peak
2	5650.000	48.09	4.06	52.15	68.20	-16.05	peak
3	5700.000	49.93	4.15	54.08	105.20	-51.12	peak
4	5720.000	49.38	4.18	53.56	110.80	-57.24	peak
5	5725.000	50.31	4.19	54.50	122.20	-67.70	peak
6	5822.400	111.92	4.36	116.28	--	--	peak
7	5850.000	77.44	4.40	81.84	122.20	-40.36	peak
8	5855.000	72.70	4.41	77.11	110.80	-33.69	peak
9	5875.000	56.38	4.44	60.82	105.20	-44.38	peak
10	5925.000	49.49	4.53	54.02	68.20	-14.18	peak
11	5958.400	51.58	4.58	56.16	68.20	-12.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

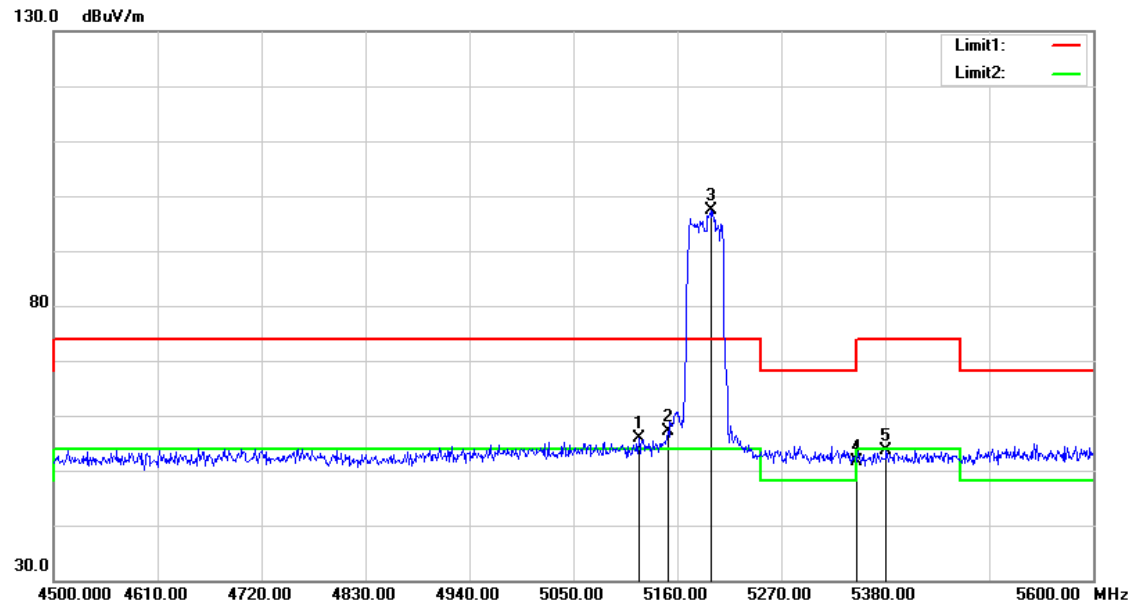


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	52.50	3.32	55.82	74.00	-18.18	peak
2	5150.000	53.71	3.35	57.06	74.00	-16.94	peak
3	5195.200	93.92	3.41	97.33	--	--	peak
4	5350.000	48.03	3.62	51.65	74.00	-22.35	peak
5	5381.100	49.96	3.65	53.61	74.00	-20.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

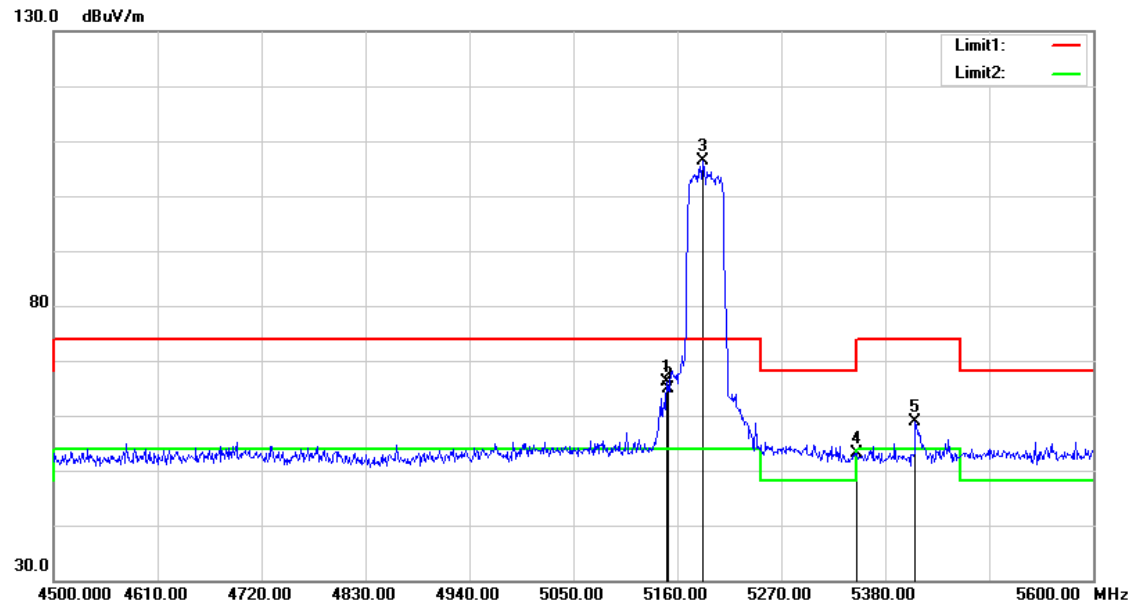


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.000	62.82	3.35	66.17	74.00	-7.83	peak
2	5150.000	61.64	3.35	64.99	74.00	-9.01	peak
3	5186.400	102.93	3.40	106.33	--	--	peak
4	5350.000	49.62	3.62	53.24	74.00	-20.76	peak
5	5411.900	55.09	3.70	58.79	74.00	-15.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

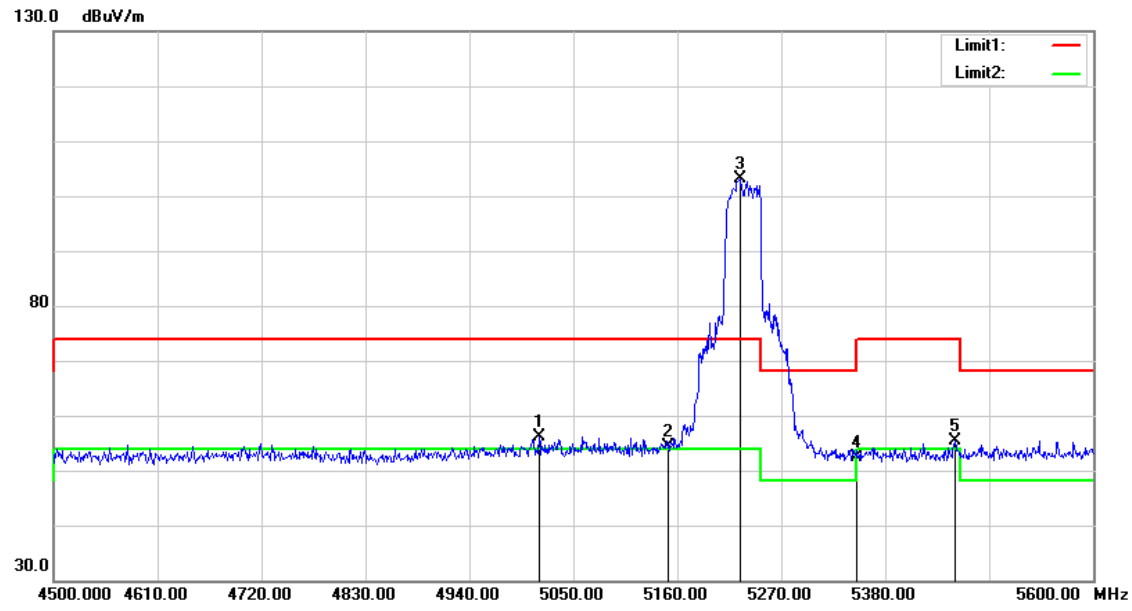


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5013.700	53.01	3.17	56.18	74.00	-17.82	peak
2	5150.000	51.10	3.35	54.45	74.00	-19.55	peak
3	5226.000	99.61	3.45	103.06	--	--	peak
4	5350.000	48.76	3.62	52.38	74.00	-21.62	peak
5	5453.700	51.55	3.75	55.30	74.00	-18.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

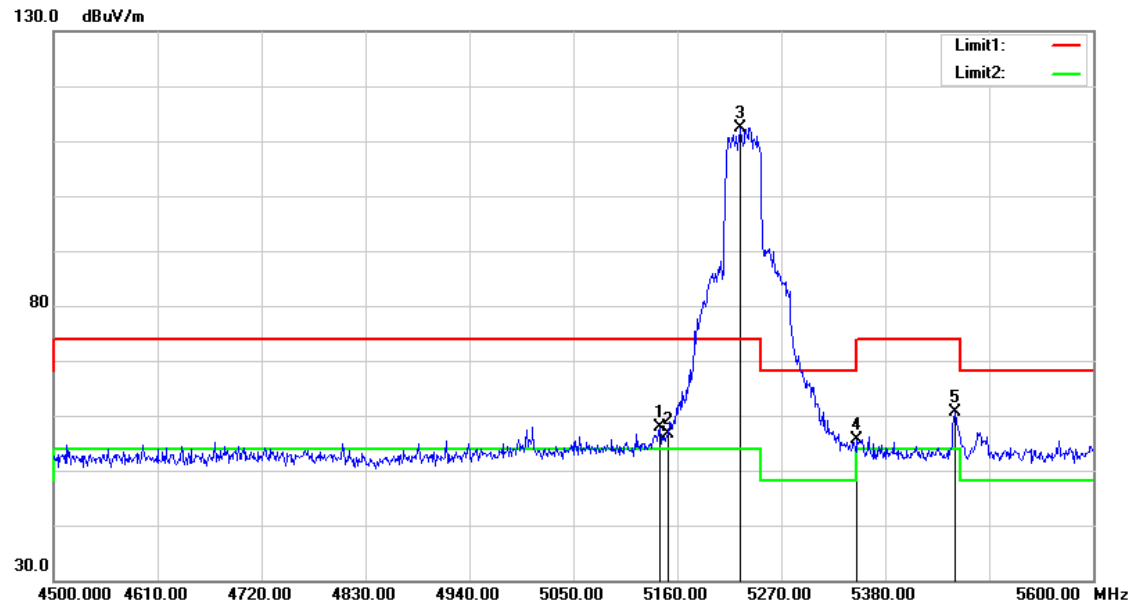


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.300	54.54	3.34	57.88	74.00	-16.12	peak
2	5150.000	53.35	3.35	56.70	74.00	-17.30	peak
3	5227.100	108.95	3.45	112.40	--	--	peak
4	5350.000	52.03	3.62	55.65	74.00	-18.35	peak
5	5453.700	56.90	3.75	60.65	74.00	-13.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

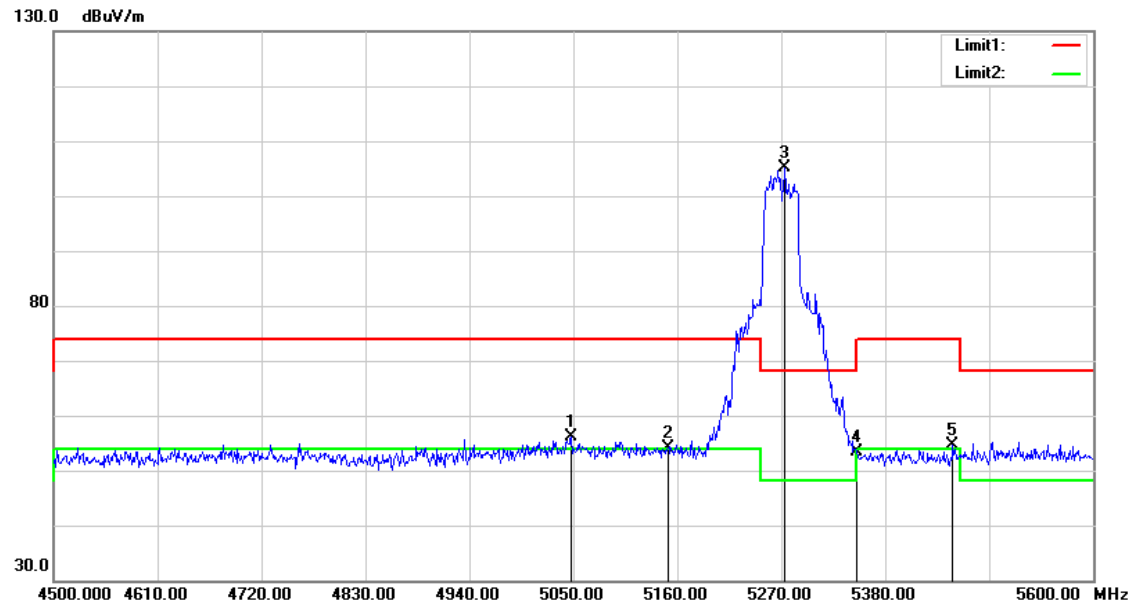


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5047.800	52.94	3.21	56.15	74.00	-17.85	peak
2	5150.000	50.90	3.35	54.25	74.00	-19.75	peak
3	5273.300	101.51	3.51	105.02	--	--	peak
4	5350.000	49.65	3.62	53.27	74.00	-20.73	peak
5	5451.500	50.99	3.75	54.74	74.00	-19.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

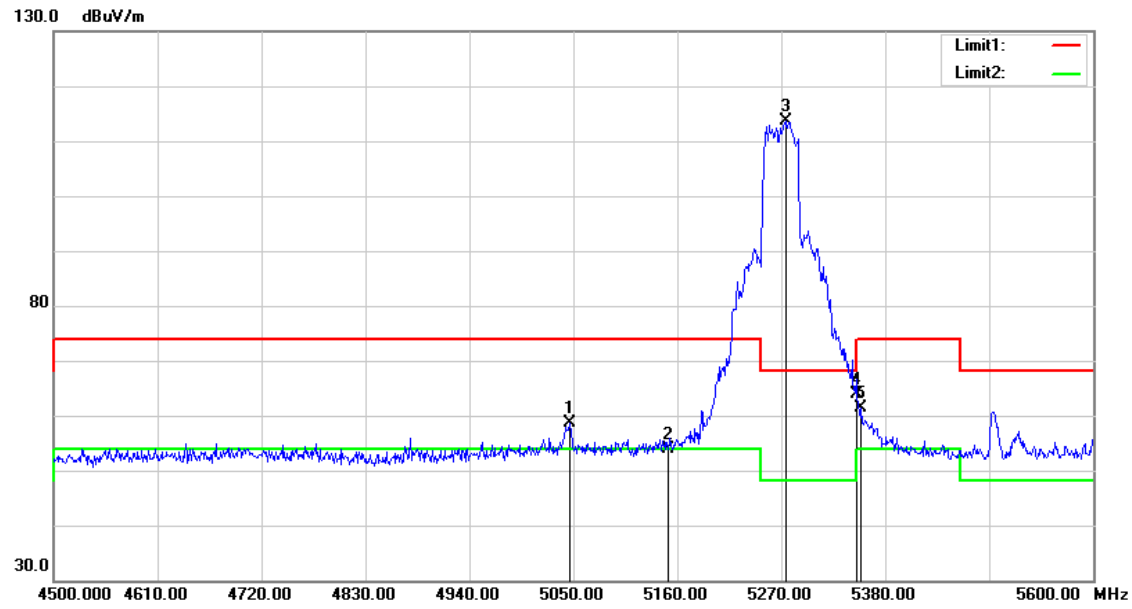


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.600	55.52	3.21	58.73	74.00	-15.27	peak
2	5150.000	50.61	3.35	53.96	74.00	-20.04	peak
3	5274.400	110.03	3.51	113.54	--	--	peak
4	5350.000	60.16	3.62	63.78	74.00	-10.22	peak
5	5354.700	57.71	3.62	61.33	74.00	-12.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

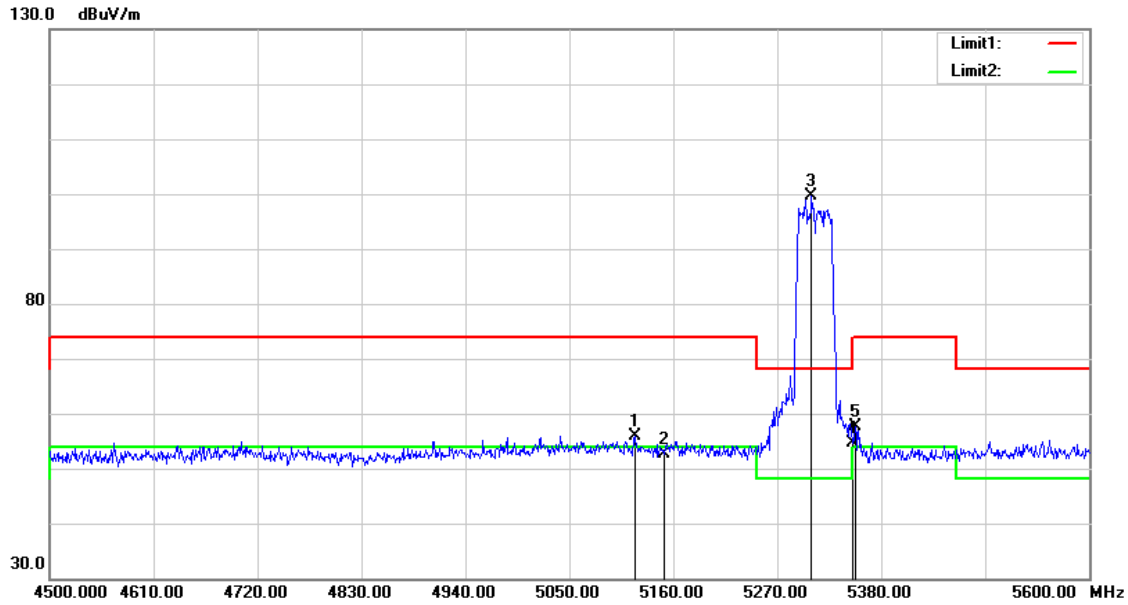


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	52.59	3.32	55.91	74.00	-18.09	peak
2	5150.000	49.32	3.35	52.67	74.00	-21.33	peak
3	5306.300	95.96	3.57	99.53	--	--	peak
4	5350.000	51.06	3.62	54.68	74.00	-19.32	peak
5	5352.500	53.89	3.62	57.51	74.00	-16.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

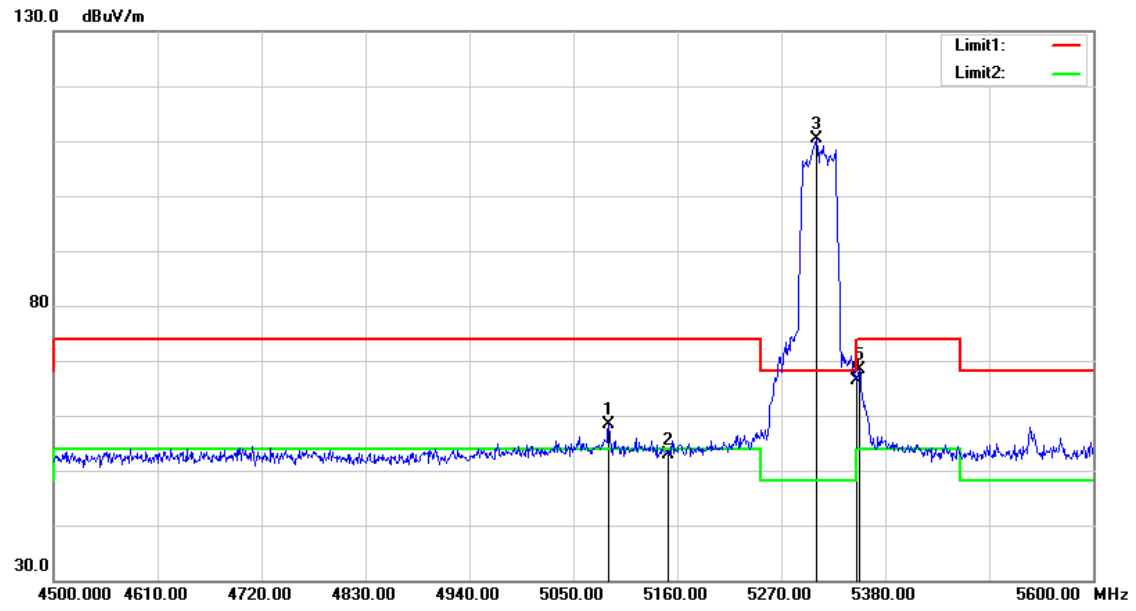


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.400	55.02	3.26	58.28	74.00	-15.72	peak
2	5150.000	49.61	3.35	52.96	74.00	-21.04	peak
3	5307.400	106.82	3.57	110.39	--	--	peak
4	5350.000	62.85	3.62	66.47	74.00	-7.53	peak
5	5352.500	64.64	3.62	68.26	74.00	-5.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

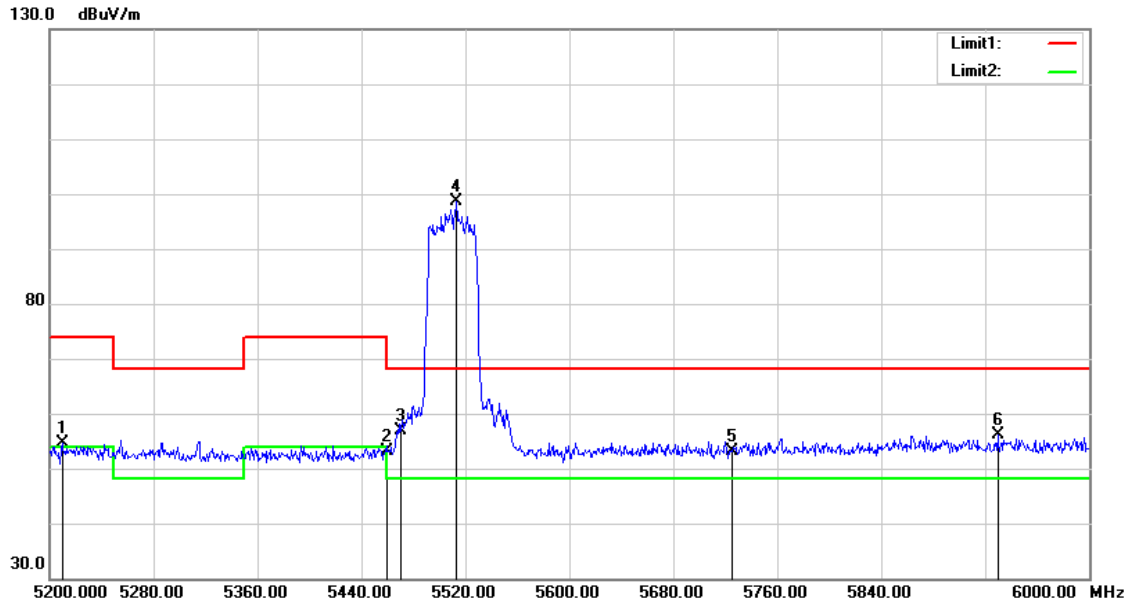


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	51.17	3.43	54.60	74.00	-19.40	peak
2	5460.000	49.47	3.76	53.23	74.00	-20.77	peak
3	5470.000	53.21	3.78	56.99	68.20	-11.21	peak
4	5512.800	94.76	3.85	98.61	--	--	peak
5	5725.000	49.01	4.19	53.20	68.20	-15.00	peak
6	5929.600	51.61	4.54	56.15	68.20	-12.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

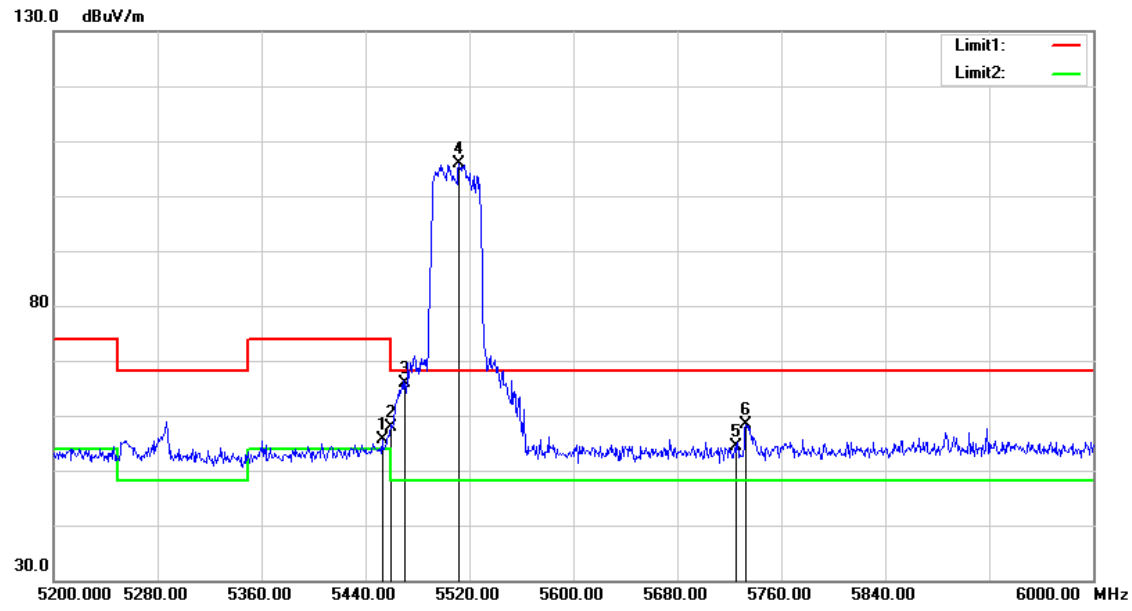


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	51.99	3.75	55.74	74.00	-18.26	peak
2	5460.000	54.23	3.76	57.99	74.00	-16.01	peak
3	5470.000	62.02	3.78	65.80	68.20	-2.40	peak
4	5512.000	101.93	3.84	105.77	--	--	peak
5	5725.000	50.13	4.19	54.32	68.20	-13.88	peak
6	5732.800	54.07	4.21	58.28	68.20	-9.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

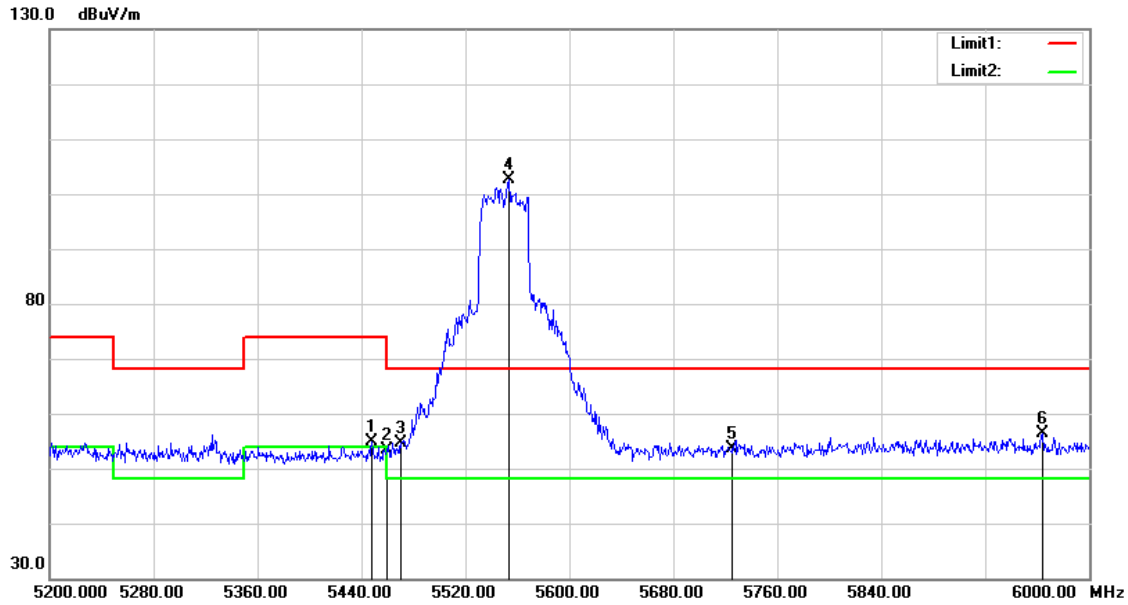


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.000	51.01	3.75	54.76	74.00	-19.24	peak
2	5460.000	49.72	3.76	53.48	74.00	-20.52	peak
3	5470.000	50.81	3.78	54.59	68.20	-13.61	peak
4	5553.600	98.66	3.90	102.56	--	--	peak
5	5725.000	49.36	4.19	53.55	68.20	-14.65	peak
6	5964.000	51.80	4.59	56.39	68.20	-11.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

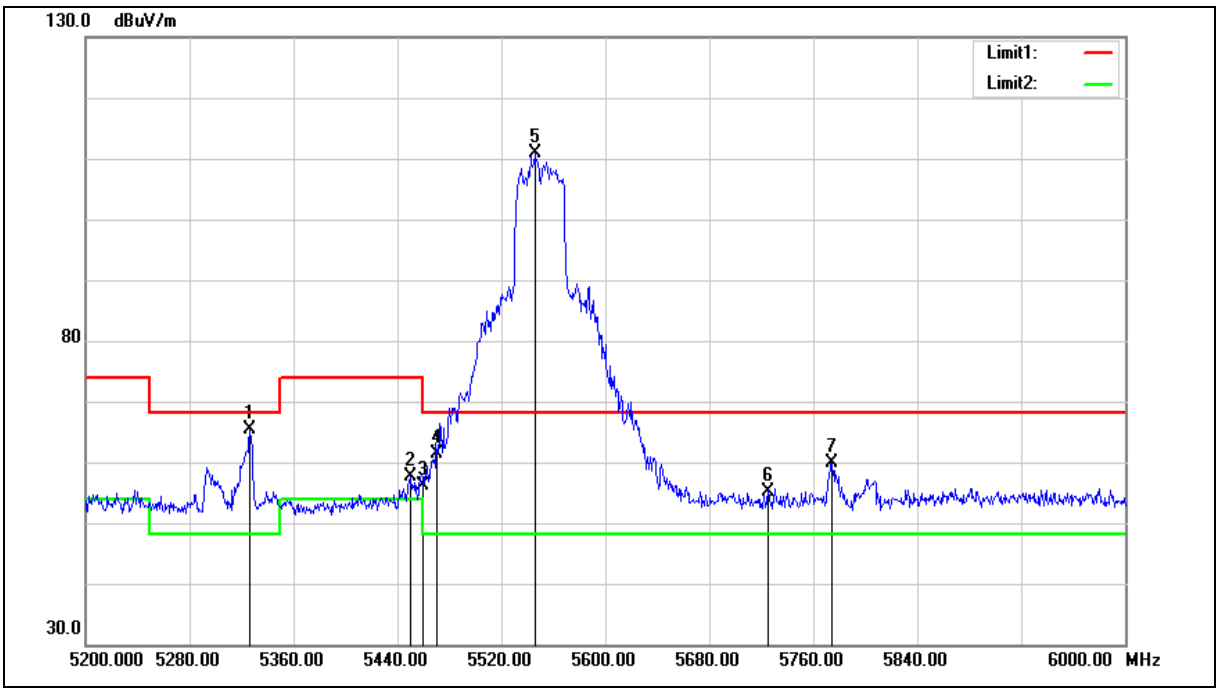

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5326.400	61.77	3.59	65.36	68.20	-2.84	peak
2	5450.400	53.80	3.75	57.55	74.00	-16.45	peak
3	5460.000	52.43	3.76	56.19	74.00	-17.81	peak
4	5470.000	57.48	3.78	61.26	68.20	-6.94	peak
5	5545.600	107.01	3.89	110.90	--	--	peak
6	5725.000	50.91	4.19	55.10	68.20	-13.10	peak
7	5774.400	55.66	4.28	59.94	68.20	-8.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

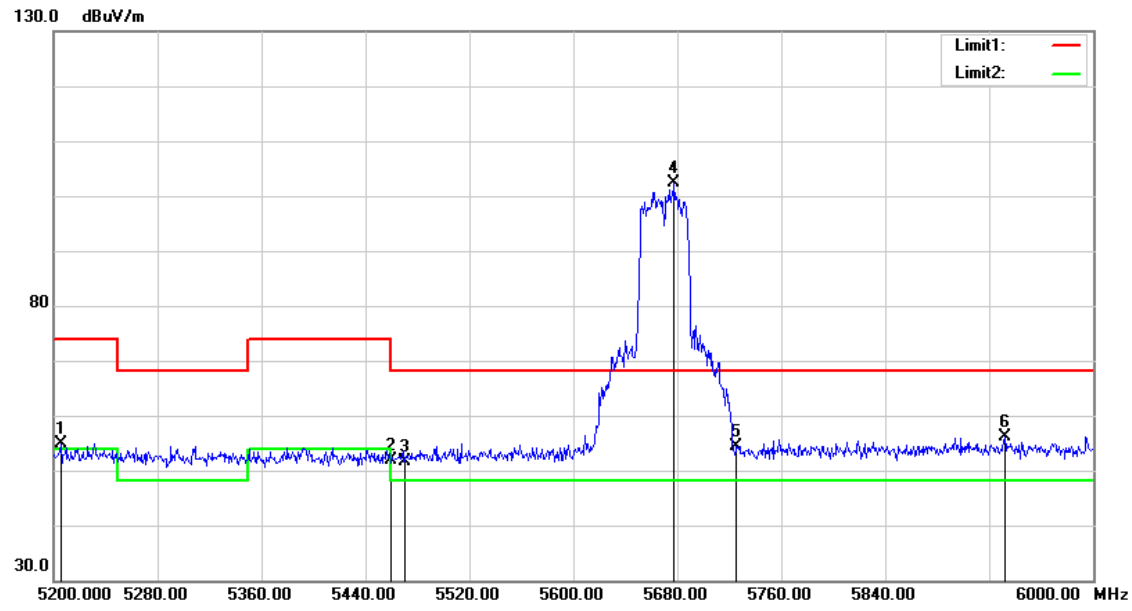


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5205.600	51.54	3.42	54.96	74.00	-19.04	peak
2	5460.000	48.15	3.76	51.91	74.00	-22.09	peak
3	5470.000	47.82	3.78	51.60	68.20	-16.60	peak
4	5677.600	98.24	4.10	102.34	--	--	peak
5	5725.000	50.30	4.19	54.49	68.20	-13.71	peak
6	5932.000	51.64	4.54	56.18	68.20	-12.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

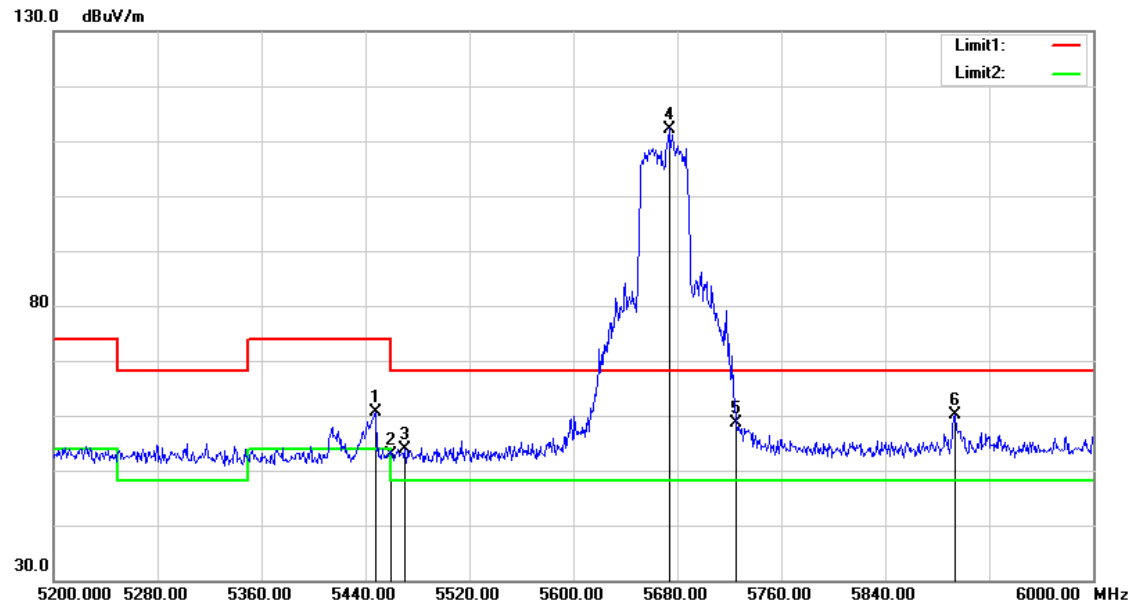


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.000	56.83	3.75	60.58	74.00	-13.42	peak
2	5460.000	49.20	3.76	52.96	74.00	-21.04	peak
3	5470.000	50.09	3.78	53.87	68.20	-14.33	peak
4	5673.600	108.15	4.10	112.25	--	--	peak
5	5725.000	54.46	4.19	58.65	68.20	-9.55	peak
6	5893.600	55.68	4.47	60.15	68.20	-8.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

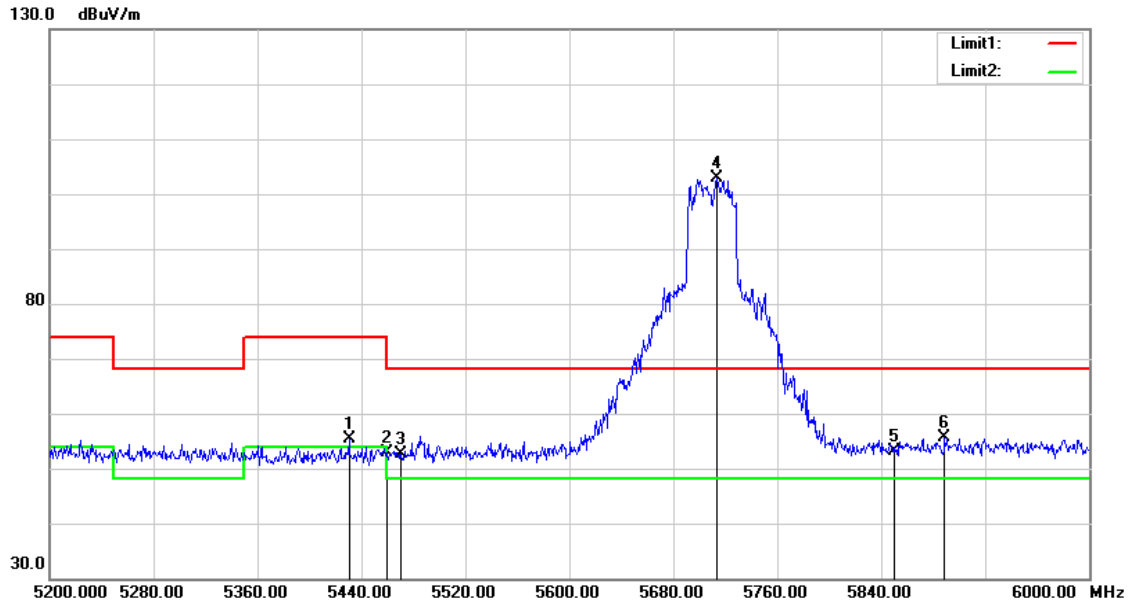


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.400	51.61	3.72	55.33	74.00	-18.67	peak
2	5460.000	49.01	3.76	52.77	74.00	-21.23	peak
3	5470.000	48.97	3.78	52.75	68.20	-15.45	peak
4	5713.600	98.71	4.18	102.89	--	--	peak
5	5850.000	48.80	4.40	53.20	68.20	-15.00	peak
6	5888.800	51.22	4.46	55.68	68.20	-12.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

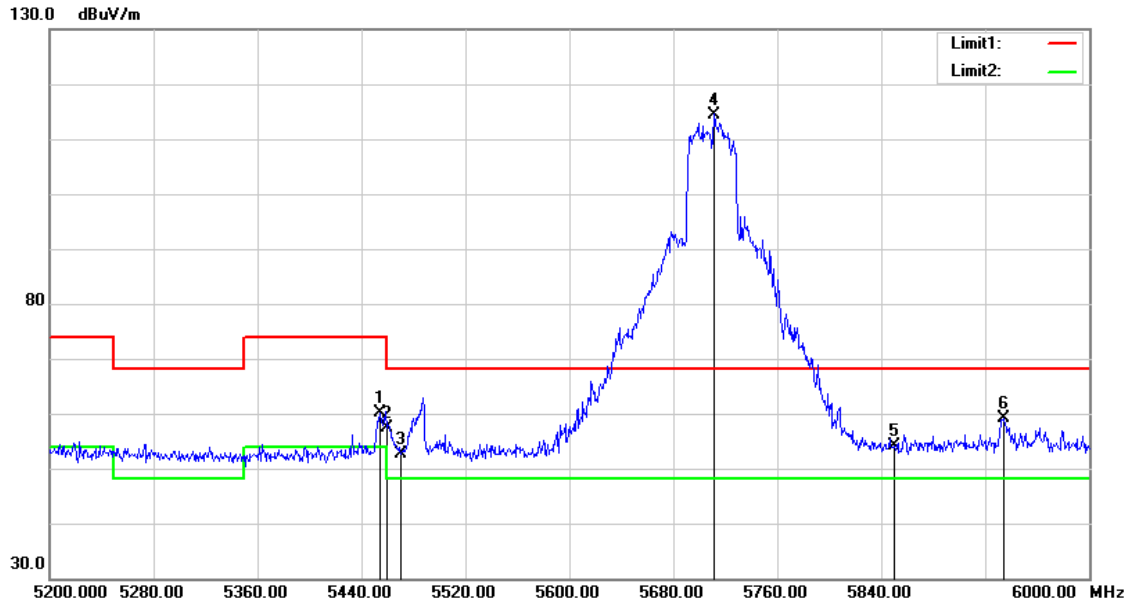


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	56.40	3.75	60.15	74.00	-13.85	peak
2	5460.000	53.52	3.76	57.28	74.00	-16.72	peak
3	5470.000	48.83	3.78	52.61	68.20	-15.59	peak
4	5711.200	110.33	4.17	114.50	--	--	peak
5	5850.000	49.67	4.40	54.07	68.20	-14.13	peak
6	5934.400	54.67	4.54	59.21	68.20	-8.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

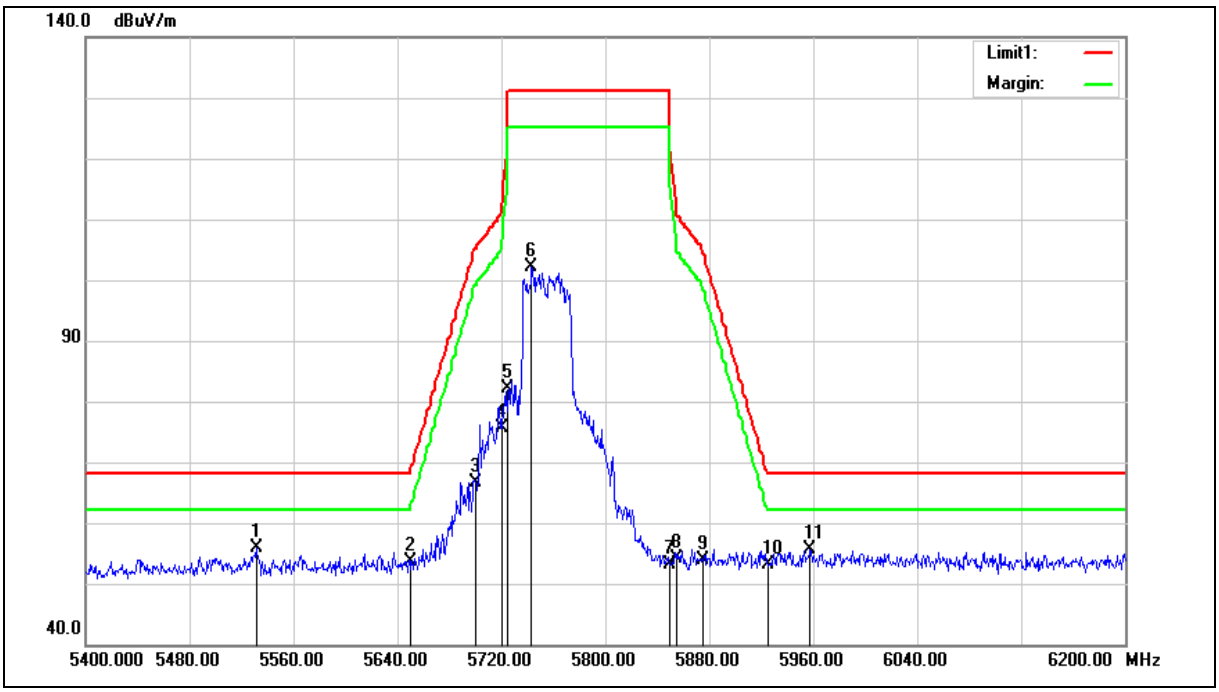

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5531.200	51.98	3.87	55.85	68.20	-12.35	peak
2	5650.000	49.55	4.06	53.61	68.20	-14.59	peak
3	5700.000	62.45	4.15	66.60	105.20	-38.60	peak
4	5720.000	71.34	4.18	75.52	110.80	-35.28	peak
5	5725.000	77.95	4.19	82.14	122.20	-40.06	peak
6	5743.200	97.90	4.22	102.12	--	--	peak
7	5850.000	48.62	4.40	53.02	122.20	-69.18	peak
8	5855.000	49.83	4.41	54.24	110.80	-56.56	peak
9	5875.000	49.56	4.44	54.00	105.20	-51.20	peak
10	5925.000	48.51	4.53	53.04	68.20	-15.16	peak
11	5957.600	51.06	4.58	55.64	68.20	-12.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

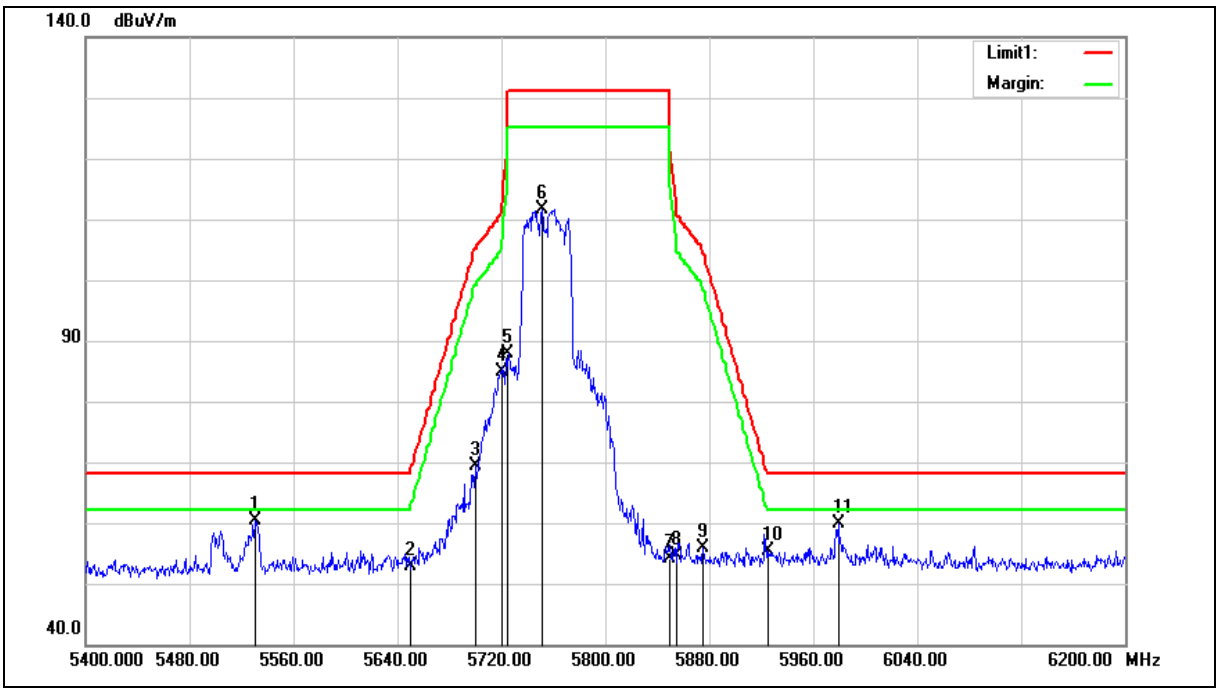

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5530.400	56.43	3.87	60.30	68.20	-7.90	peak
2	5650.000	48.94	4.06	53.00	68.20	-15.20	peak
3	5700.000	65.28	4.15	69.43	105.20	-35.77	peak
4	5720.000	80.81	4.18	84.99	110.80	-25.81	peak
5	5725.000	83.64	4.19	87.83	122.20	-34.37	peak
6	5751.200	107.40	4.24	111.64	--	--	peak
7	5850.000	49.85	4.40	54.25	122.20	-67.95	peak
8	5855.000	50.32	4.41	54.73	110.80	-56.07	peak
9	5875.000	51.45	4.44	55.89	105.20	-49.31	peak
10	5925.000	50.97	4.53	55.50	68.20	-12.70	peak
11	5979.200	55.28	4.62	59.90	68.20	-8.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

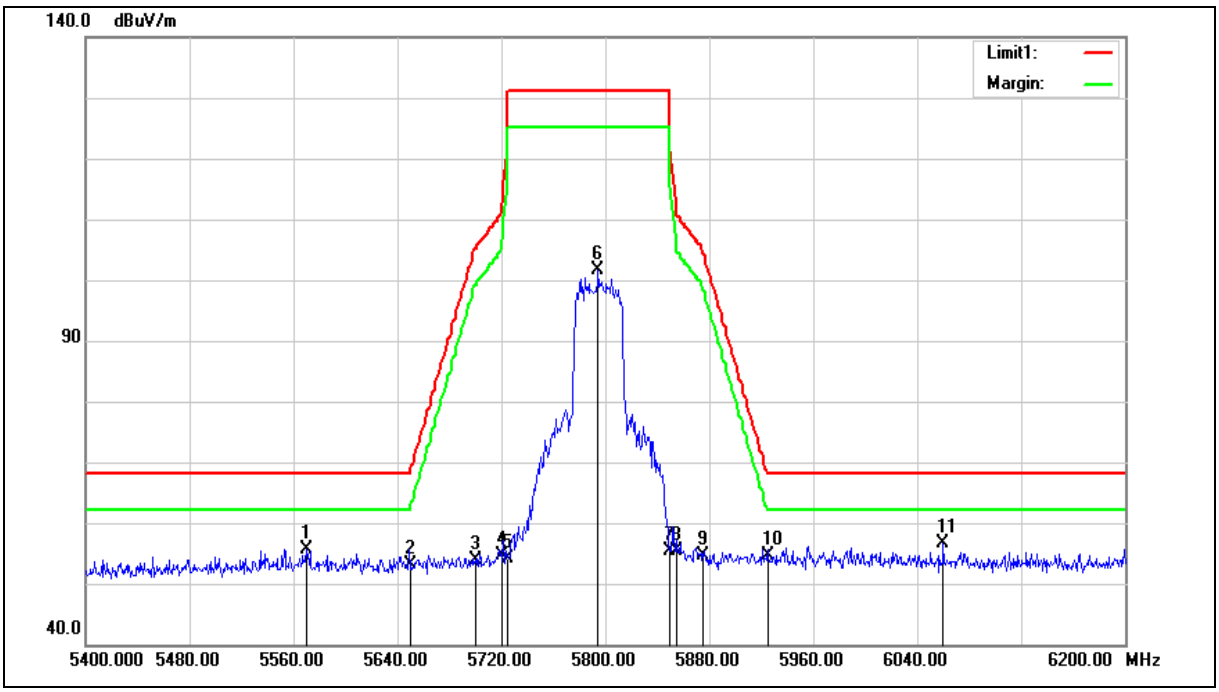

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5569.600	51.70	3.93	55.63	68.20	-12.57	peak
2	5650.000	49.06	4.06	53.12	68.20	-15.08	peak
3	5700.000	49.73	4.15	53.88	105.20	-51.32	peak
4	5720.000	50.53	4.18	54.71	110.80	-56.09	peak
5	5725.000	50.05	4.19	54.24	122.20	-67.96	peak
6	5794.400	97.44	4.30	101.74	--	--	peak
7	5850.000	51.05	4.40	55.45	122.20	-66.75	peak
8	5855.000	50.85	4.41	55.26	110.80	-55.54	peak
9	5875.000	50.14	4.44	54.58	105.20	-50.62	peak
10	5925.000	50.20	4.53	54.73	68.20	-13.47	peak
11	6060.000	51.89	4.85	56.74	68.20	-11.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

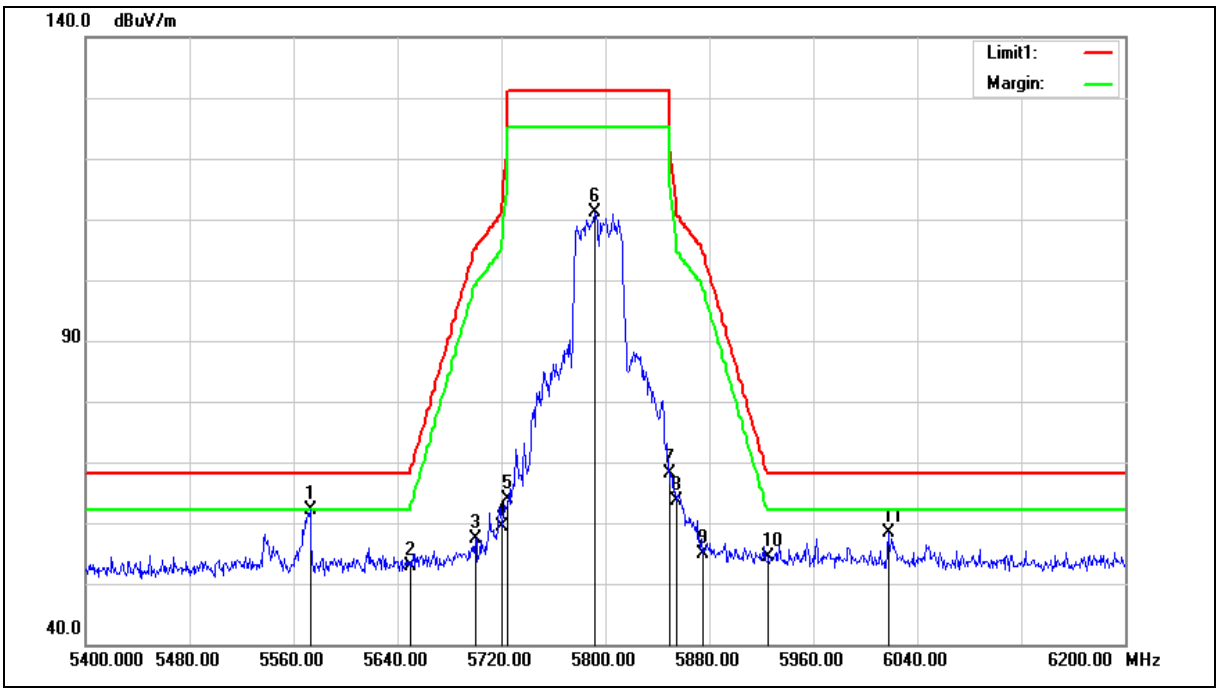

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5572.800	58.21	3.94	62.15	68.20	-6.05	peak
2	5650.000	48.87	4.06	52.93	68.20	-15.27	peak
3	5700.000	53.12	4.15	57.27	105.20	-47.93	peak
4	5720.000	55.31	4.18	59.49	110.80	-51.31	peak
5	5725.000	59.62	4.19	63.81	122.20	-58.39	peak
6	5792.000	106.73	4.30	111.03	--	--	peak
7	5850.000	63.79	4.40	68.19	122.20	-54.01	peak
8	5855.000	59.16	4.41	63.57	110.80	-47.23	peak
9	5875.000	50.39	4.44	54.83	105.20	-50.37	peak
10	5925.000	49.96	4.53	54.49	68.20	-13.71	peak
11	6017.600	53.75	4.71	58.46	68.20	-9.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

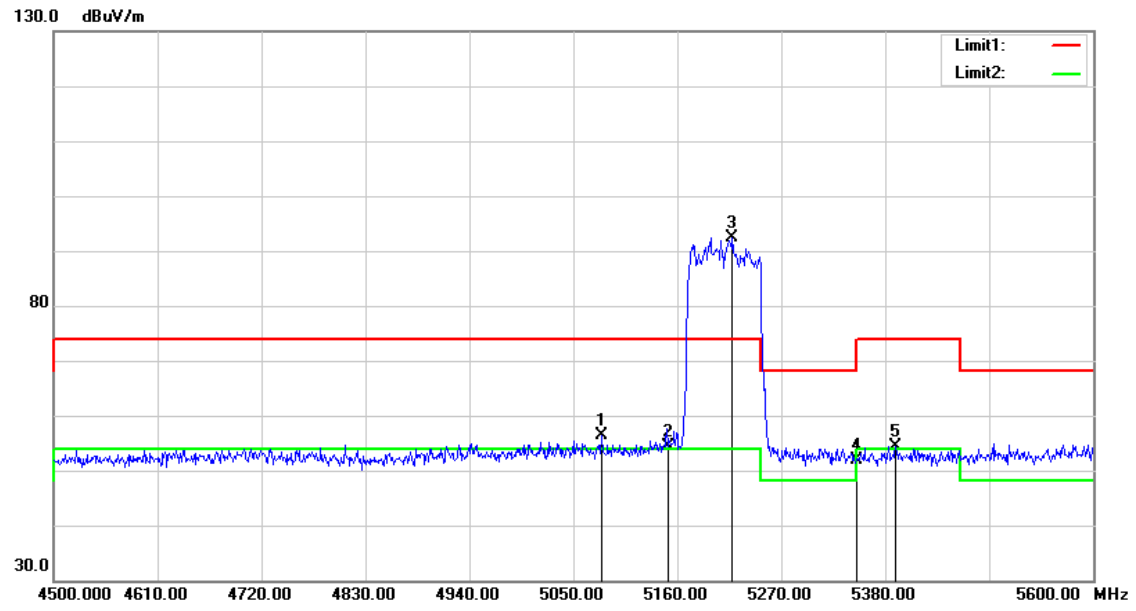


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5079.700	53.20	3.25	56.45	74.00	-17.55	peak
2	5150.000	50.97	3.35	54.32	74.00	-19.68	peak
3	5218.300	89.06	3.43	92.49	--	--	peak
4	5350.000	48.36	3.62	51.98	74.00	-22.02	peak
5	5391.000	50.79	3.67	54.46	74.00	-19.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

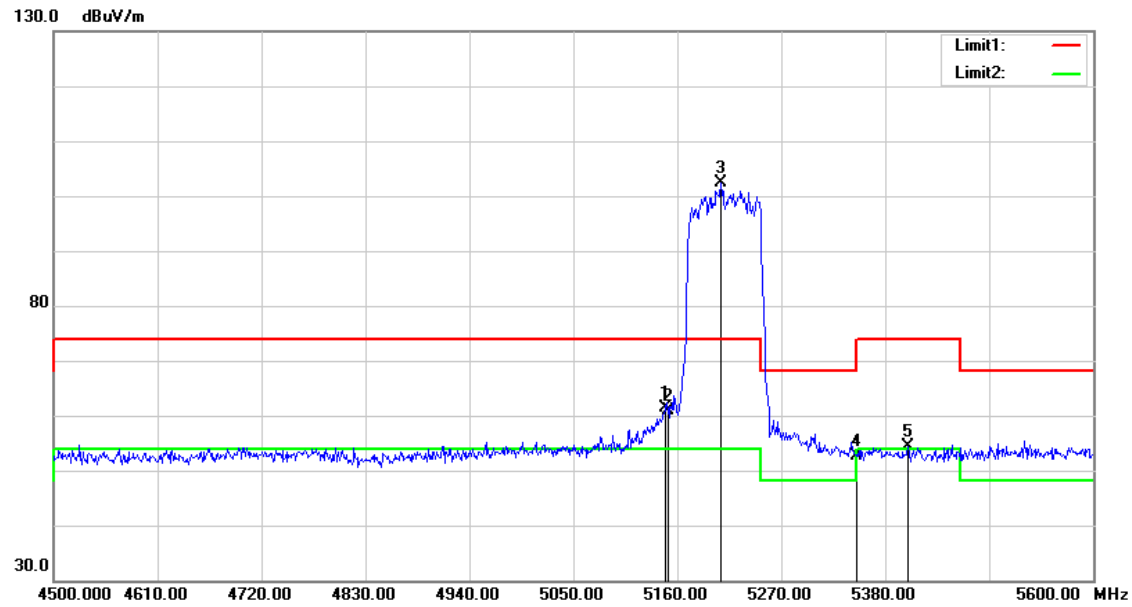


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.900	58.11	3.35	61.46	74.00	-12.54	peak
2	5150.000	57.60	3.35	60.95	74.00	-13.05	peak
3	5206.200	98.84	3.42	102.26	--	--	peak
4	5350.000	48.96	3.62	52.58	74.00	-21.42	peak
5	5404.200	50.73	3.68	54.41	74.00	-19.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

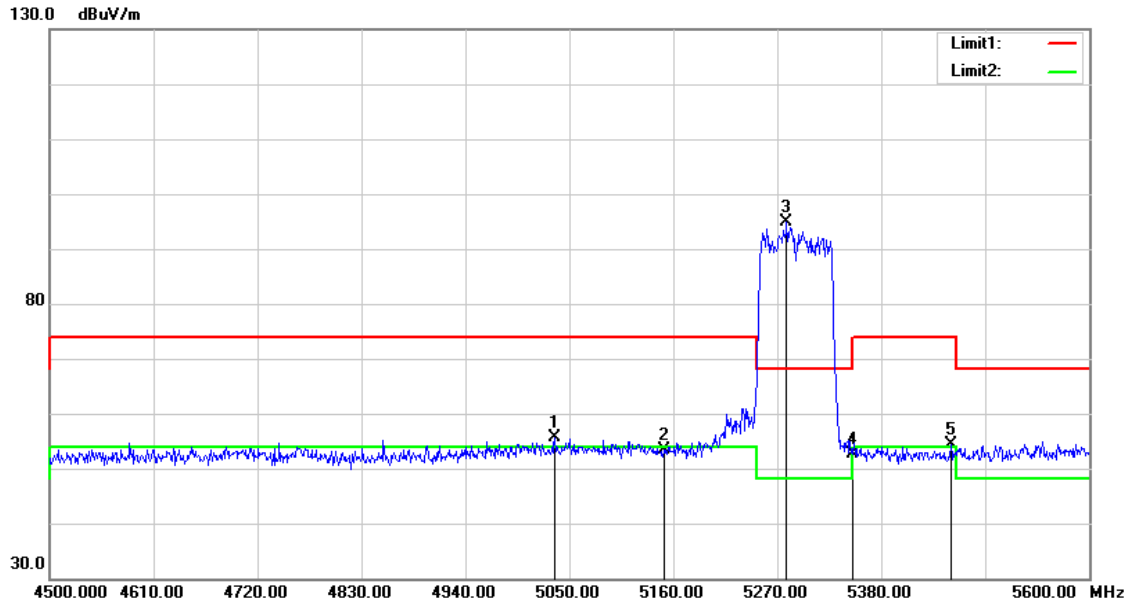


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5034.600	52.40	3.20	55.60	74.00	-18.40	peak
2	5150.000	50.02	3.35	53.37	74.00	-20.63	peak
3	5279.900	91.32	3.51	94.83	--	--	peak
4	5350.000	48.92	3.62	52.54	74.00	-21.46	peak
5	5453.700	50.64	3.75	54.39	74.00	-19.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

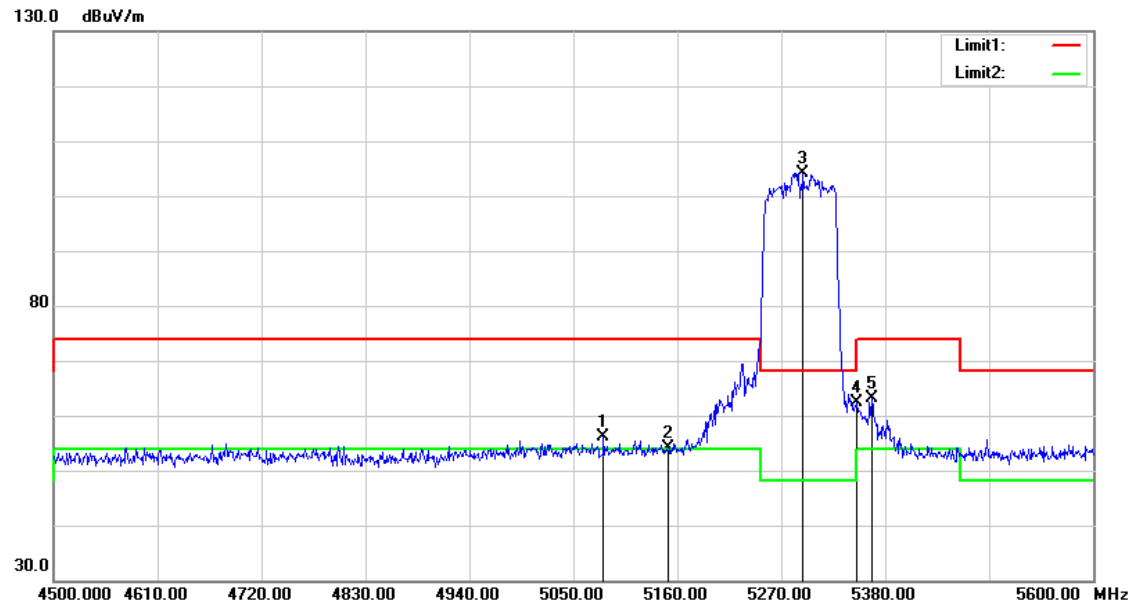


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5081.900	52.88	3.26	56.14	74.00	-17.86	peak
2	5150.000	50.75	3.35	54.10	74.00	-19.90	peak
3	5293.100	100.67	3.53	104.20	--	--	peak
4	5350.000	58.64	3.62	62.26	74.00	-11.74	peak
5	5365.700	59.46	3.64	63.10	74.00	-10.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

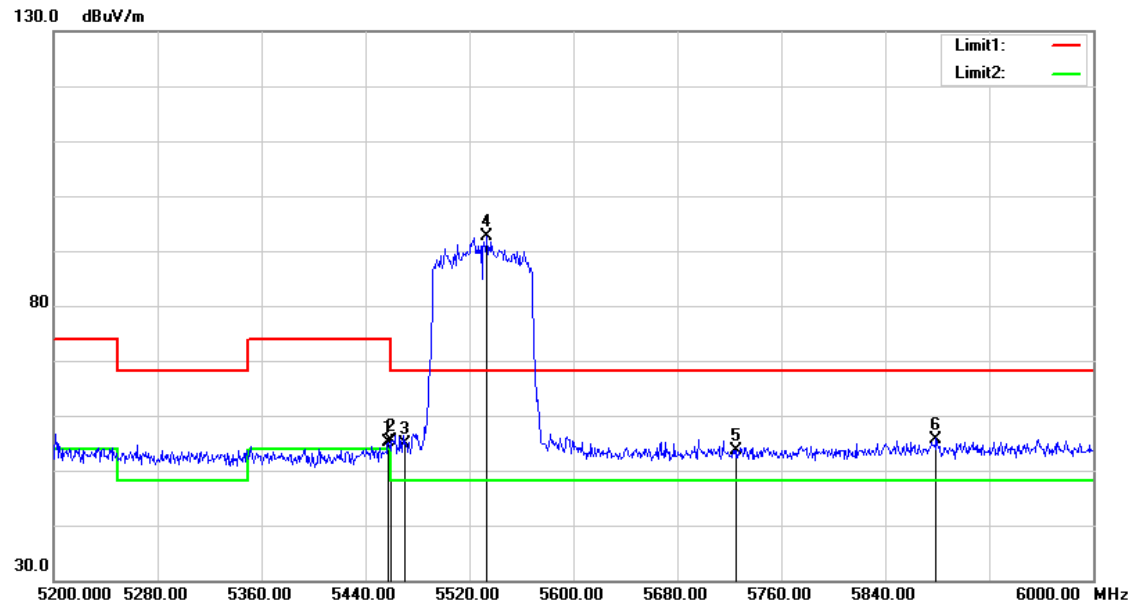


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.600	51.30	3.76	55.06	74.00	-18.94	peak
2	5460.000	51.64	3.76	55.40	74.00	-18.60	peak
3	5470.000	51.21	3.78	54.99	68.20	-13.21	peak
4	5533.600	88.69	3.87	92.56	--	--	peak
5	5725.000	49.32	4.19	53.51	68.20	-14.69	peak
6	5879.200	51.30	4.45	55.75	68.20	-12.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

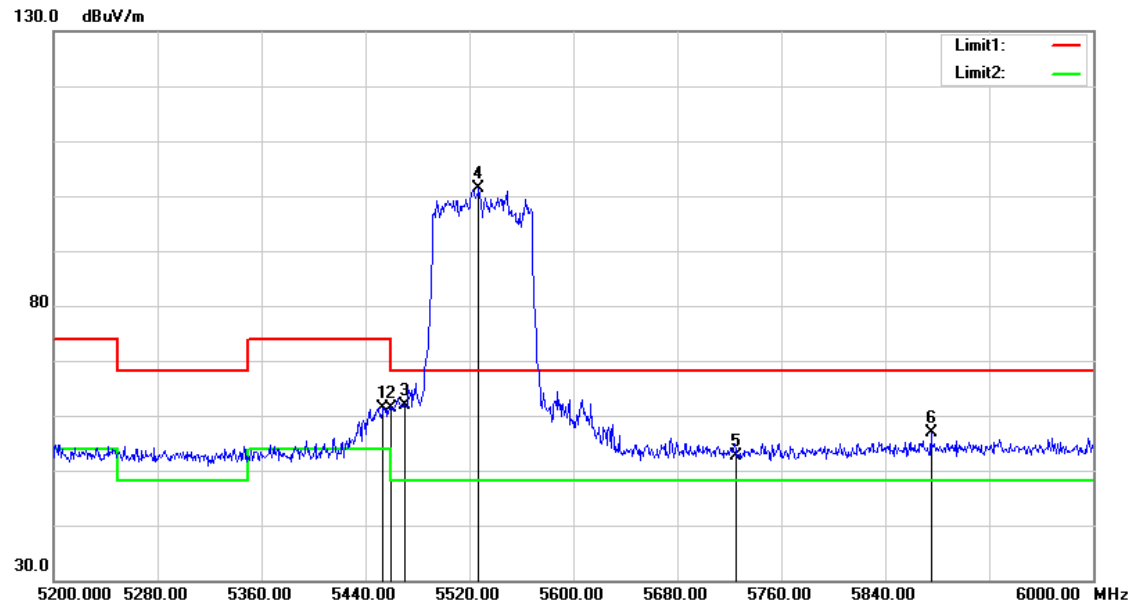


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.600	57.65	3.75	61.40	74.00	-12.60	peak
2	5460.000	57.73	3.76	61.49	74.00	-12.51	peak
3	5470.000	58.16	3.78	61.94	68.20	-6.26	peak
4	5527.200	97.62	3.86	101.48	--	--	peak
5	5725.000	48.46	4.19	52.65	68.20	-15.55	peak
6	5875.200	52.33	4.44	56.77	68.20	-11.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

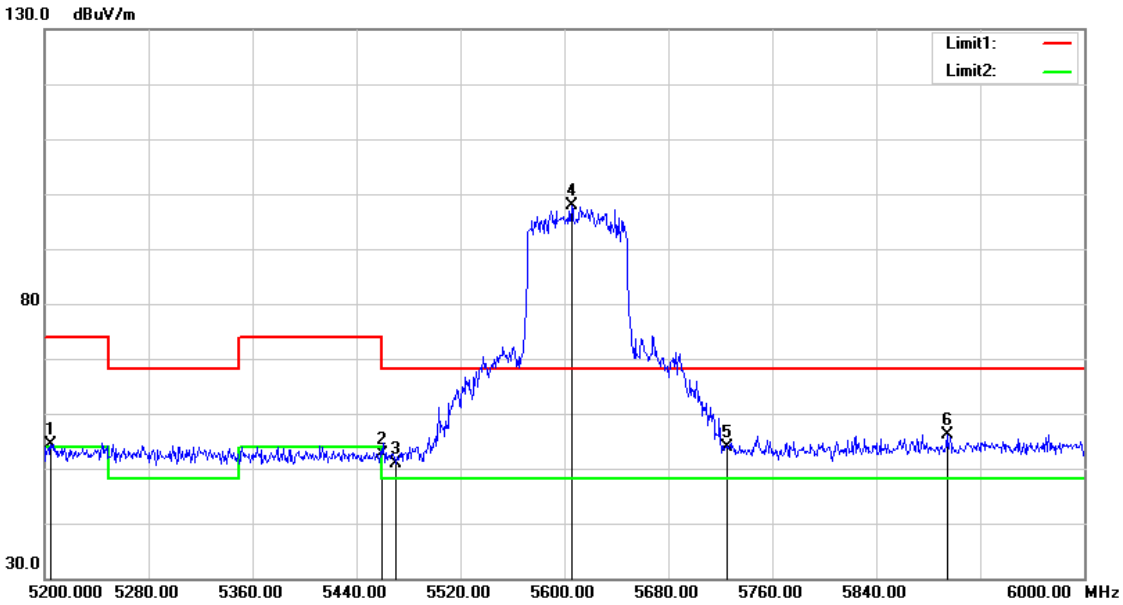


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5204.800	50.95	3.42	54.37	74.00	-19.63	peak
2	5460.000	48.86	3.76	52.62	74.00	-21.38	peak
3	5470.000	47.18	3.78	50.96	68.20	-17.24	peak
4	5605.600	93.84	3.99	97.83	--	--	peak
5	5725.000	49.71	4.19	53.90	68.20	-14.30	peak
6	5894.400	51.76	4.47	56.23	68.20	-11.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

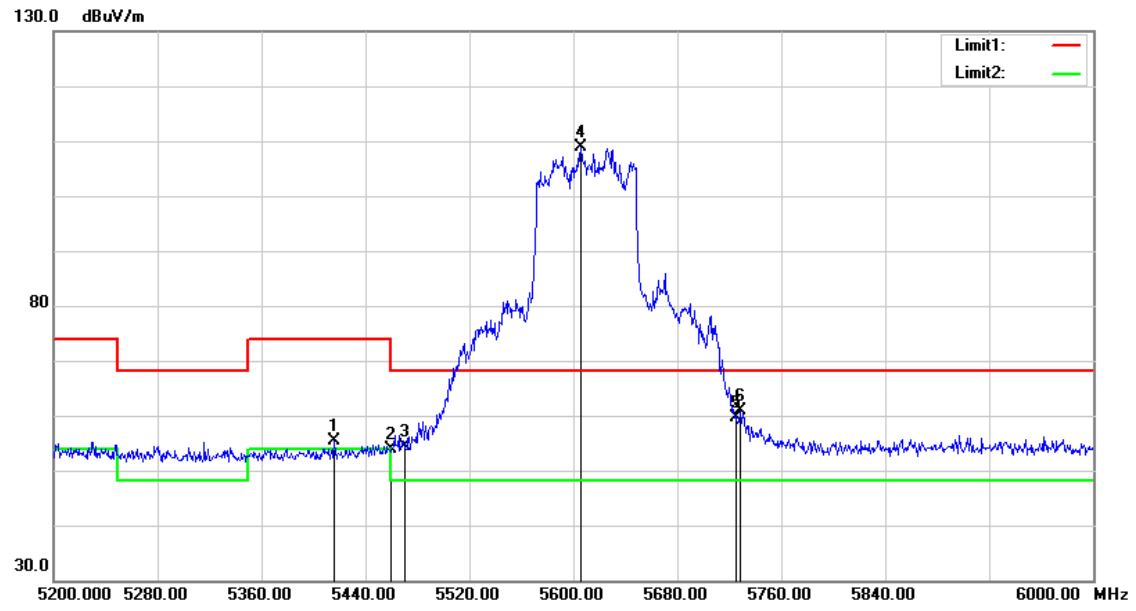


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.000	51.68	3.70	55.38	74.00	-18.62	peak
2	5460.000	50.17	3.76	53.93	74.00	-20.07	peak
3	5470.000	50.67	3.78	54.45	68.20	-13.75	peak
4	5605.600	104.79	3.99	108.78	--	--	peak
5	5725.000	55.49	4.19	59.68	68.20	-8.52	peak
6	5728.800	56.70	4.20	60.90	68.20	-7.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

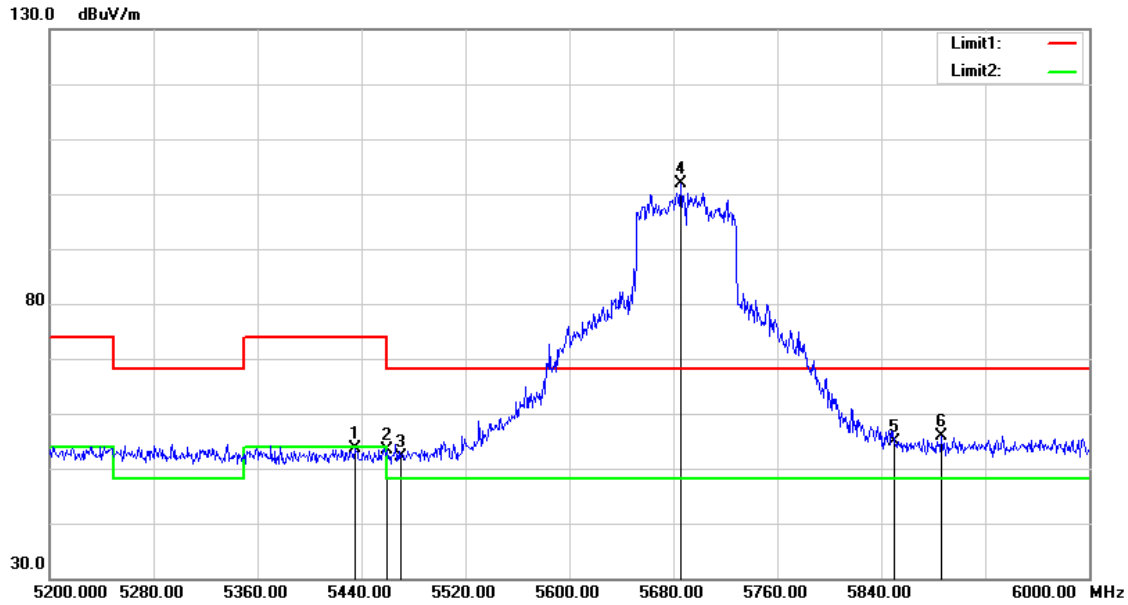


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.200	49.80	3.73	53.53	74.00	-20.47	peak
2	5460.000	49.71	3.76	53.47	74.00	-20.53	peak
3	5470.000	48.30	3.78	52.08	68.20	-16.12	peak
4	5685.600	97.68	4.12	101.80	--	--	peak
5	5850.000	50.39	4.40	54.79	68.20	-13.41	peak
6	5886.400	51.51	4.45	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

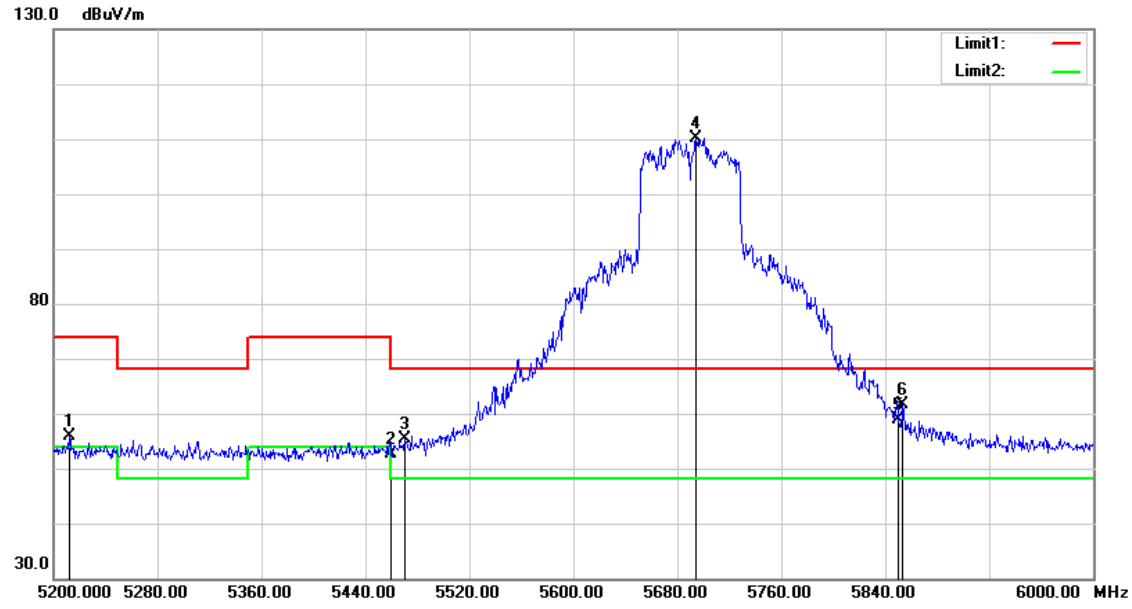


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	52.37	3.43	55.80	74.00	-18.20	peak
2	5460.000	48.83	3.76	52.59	74.00	-21.41	peak
3	5470.000	51.69	3.78	55.47	68.20	-12.73	peak
4	5694.400	106.10	4.13	110.23	--	--	peak
5	5850.000	54.56	4.40	58.96	68.20	-9.24	peak
6	5853.600	57.13	4.40	61.53	68.20	-6.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

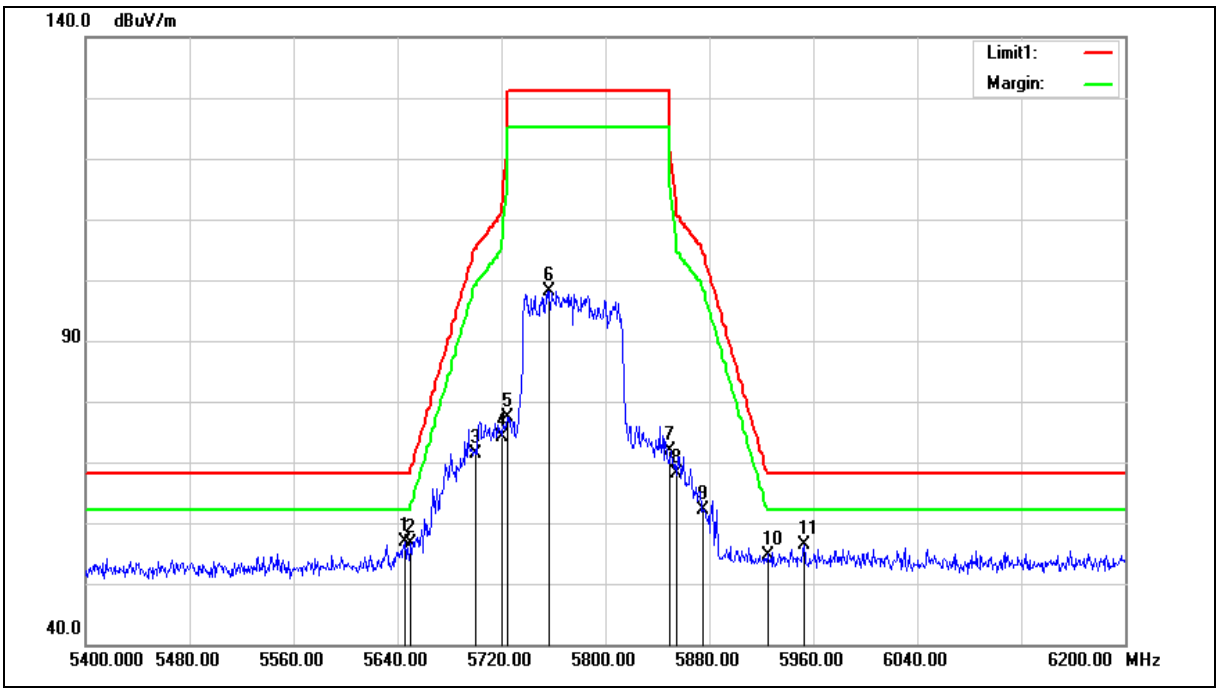

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.600	52.72	4.05	56.77	68.20	-11.43	peak
2	5650.000	52.54	4.06	56.60	68.20	-11.60	peak
3	5700.000	67.31	4.15	71.46	105.20	-33.74	peak
4	5720.000	70.07	4.18	74.25	110.80	-36.55	peak
5	5725.000	73.23	4.19	77.42	122.20	-44.78	peak
6	5756.800	94.00	4.25	98.25	--	--	peak
7	5850.000	67.43	4.40	71.83	122.20	-50.37	peak
8	5855.000	63.64	4.41	68.05	110.80	-42.75	peak
9	5875.000	57.81	4.44	62.25	105.20	-42.95	peak
10	5925.000	49.98	4.53	54.51	68.20	-13.69	peak
11	5952.800	51.73	4.57	56.30	68.20	-11.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

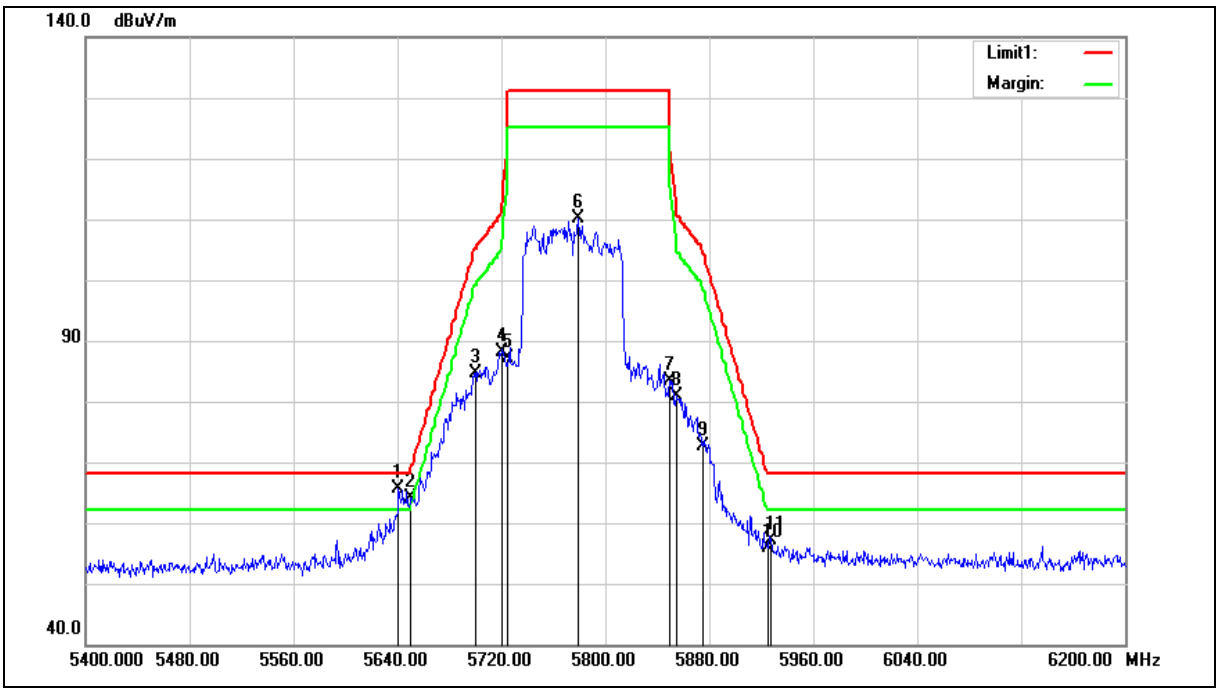

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.800	61.55	4.05	65.60	68.20	-2.60	peak
2	5650.000	60.04	4.06	64.10	68.20	-4.10	peak
3	5700.000	80.45	4.15	84.60	105.20	-20.60	peak
4	5720.000	84.05	4.18	88.23	110.80	-22.57	peak
5	5725.000	82.83	4.19	87.02	122.20	-35.18	peak
6	5779.200	105.94	4.29	110.23	--	--	peak
7	5850.000	78.91	4.40	83.31	122.20	-38.89	peak
8	5855.000	76.44	4.41	80.85	110.80	-29.95	peak
9	5875.000	68.21	4.44	72.65	105.20	-32.55	peak
10	5925.000	51.47	4.53	56.00	68.20	-12.20	peak
11	5927.200	52.58	4.53	57.11	68.20	-11.09	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

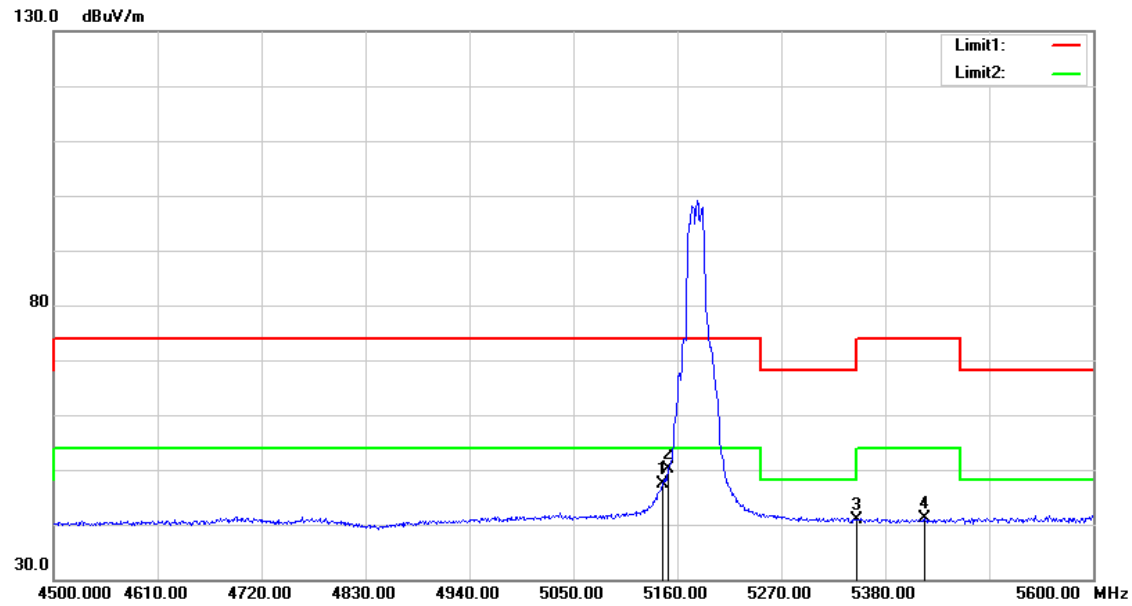


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.600	43.91	3.35	47.26	54.00	-6.74	AVG
2	5150.000	46.88	3.35	50.23	54.00	-3.77	AVG
3	5350.000	37.17	3.62	40.79	54.00	-13.21	AVG
4	5421.800	37.37	3.71	41.08	54.00	-12.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

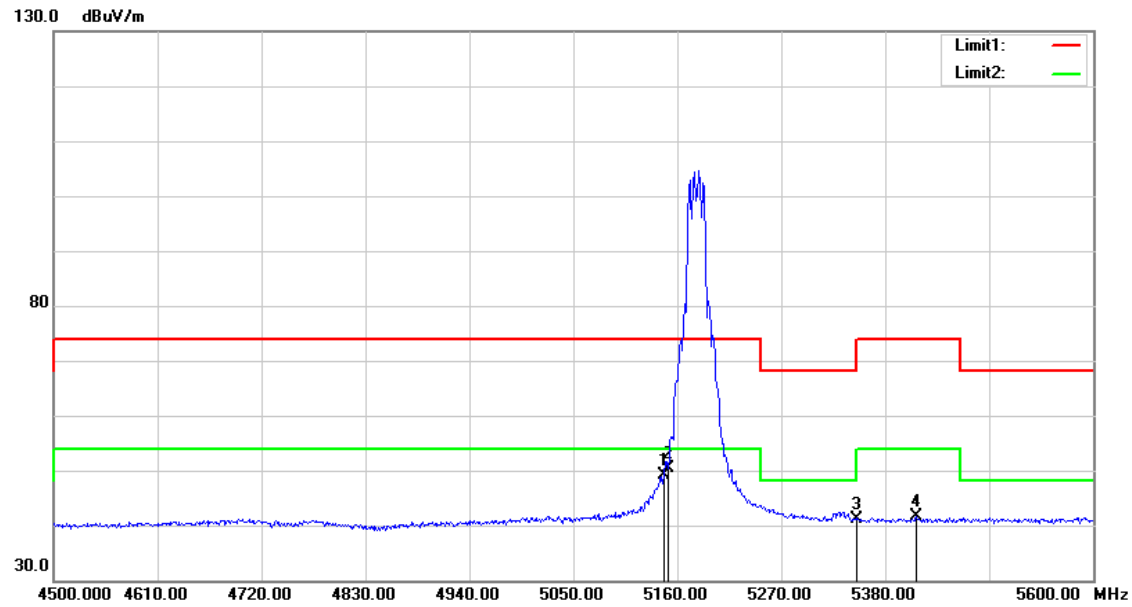


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	45.66	3.35	49.01	54.00	-4.99	AVG
2	5150.000	46.94	3.35	50.29	54.00	-3.71	AVG
3	5350.000	37.42	3.62	41.04	54.00	-12.96	AVG
4	5413.000	37.82	3.70	41.52	54.00	-12.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

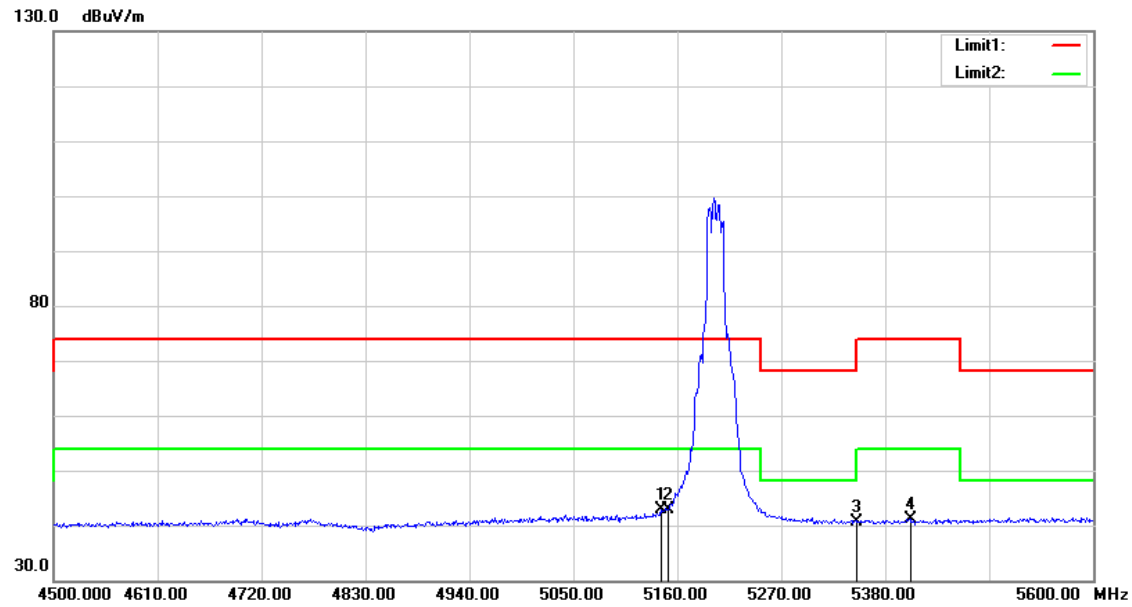


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	39.56	3.34	42.90	54.00	-11.10	AVG
2	5150.000	39.46	3.35	42.81	54.00	-11.19	AVG
3	5350.000	37.12	3.62	40.74	54.00	-13.26	AVG
4	5406.400	37.55	3.70	41.25	54.00	-12.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

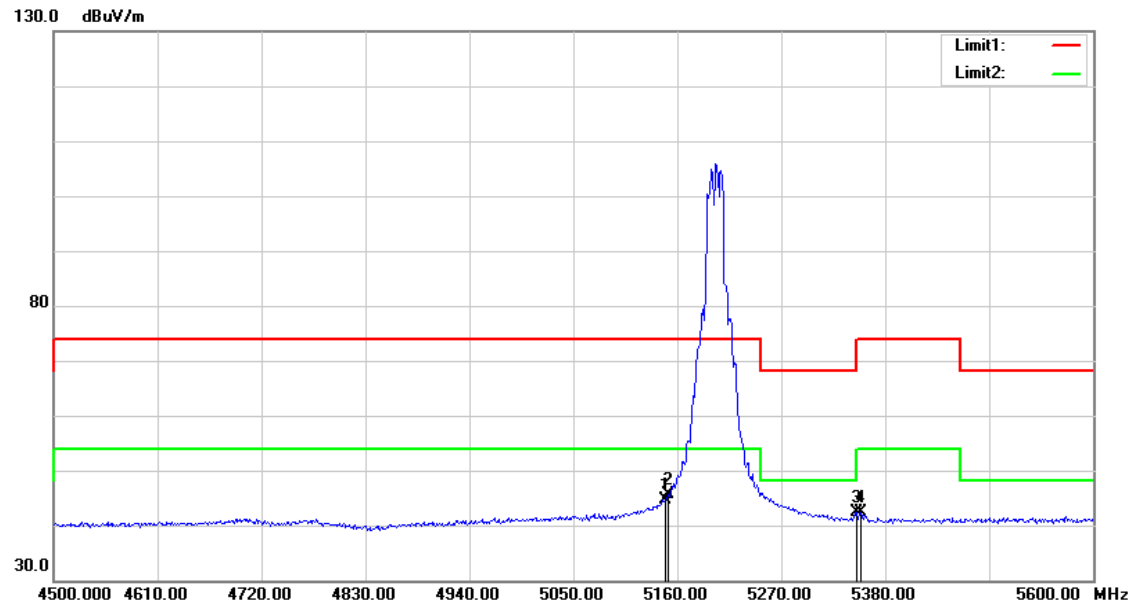


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.900	41.17	3.35	44.52	54.00	-9.48	AVG
2	5150.000	42.26	3.35	45.61	54.00	-8.39	AVG
3	5350.000	38.75	3.62	42.37	54.00	-11.63	AVG
4	5354.700	38.73	3.62	42.35	54.00	-11.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

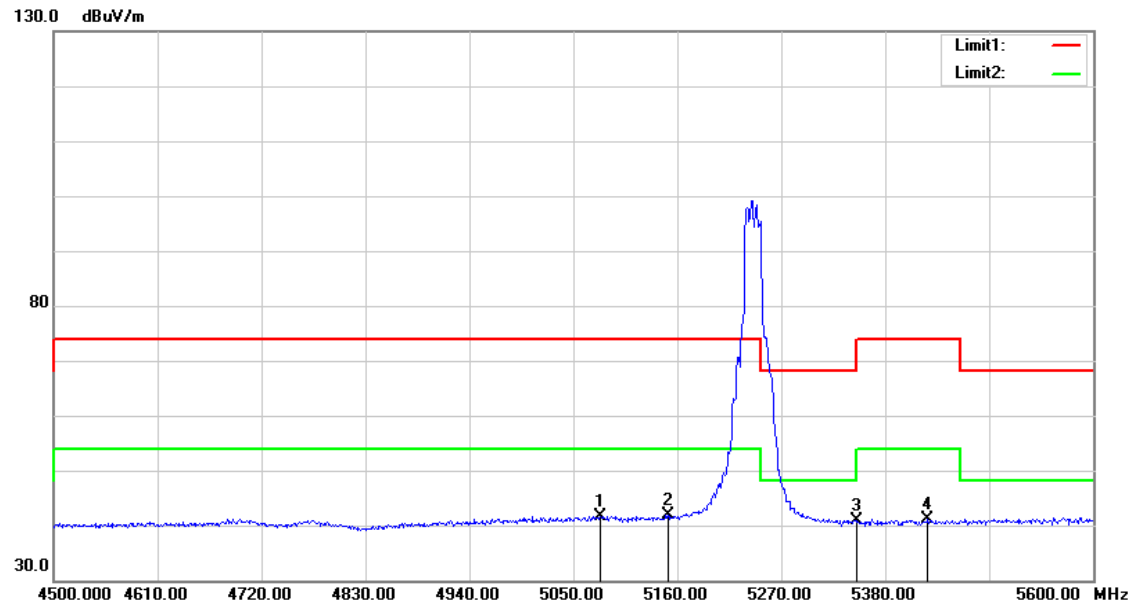


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.600	38.48	3.25	41.73	54.00	-12.27	AVG
2	5150.000	38.42	3.35	41.77	54.00	-12.23	AVG
3	5350.000	37.33	3.62	40.95	54.00	-13.05	AVG
4	5425.100	37.36	3.71	41.07	54.00	-12.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

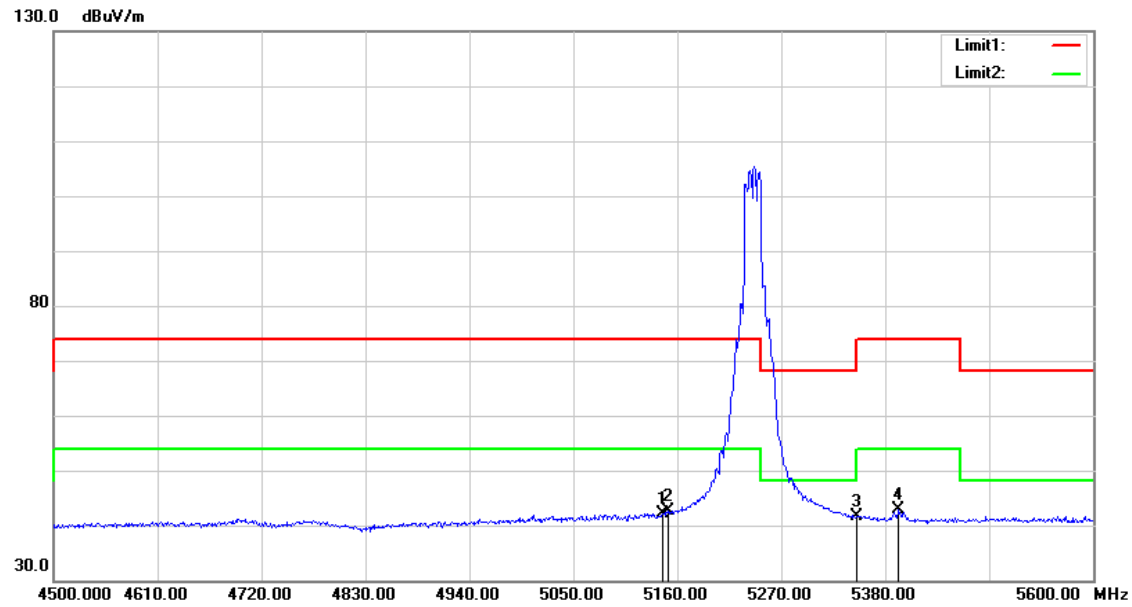


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.600	38.87	3.35	42.22	54.00	-11.78	AVG
2	5150.000	39.16	3.35	42.51	54.00	-11.49	AVG
3	5350.000	38.02	3.62	41.64	54.00	-12.36	AVG
4	5394.300	39.09	3.68	42.77	54.00	-11.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

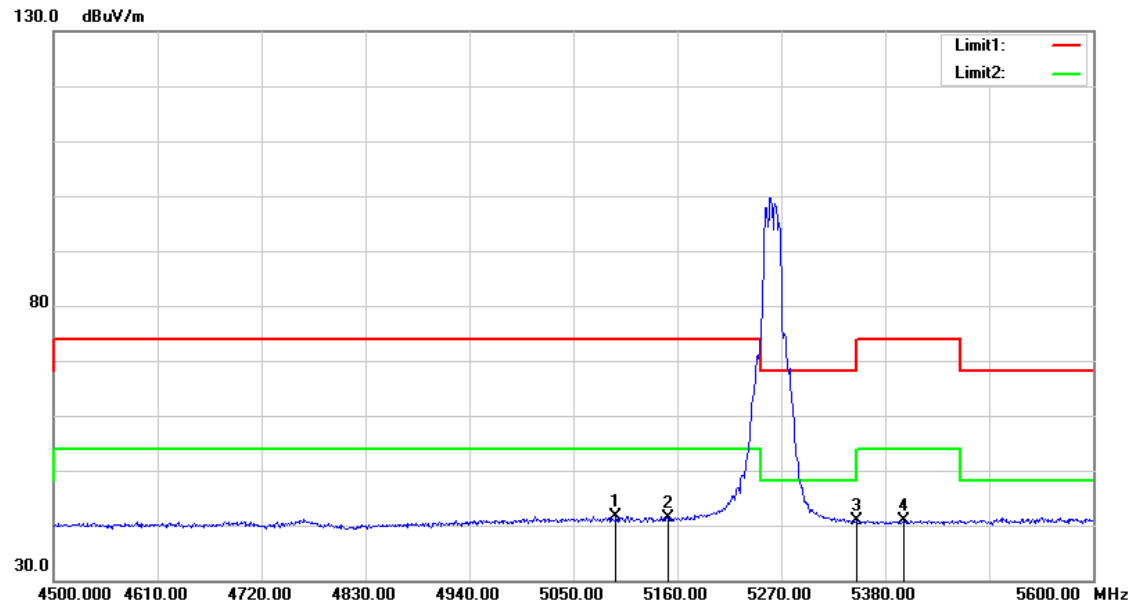


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5095.100	38.45	3.28	41.73	54.00	-12.27	AVG
2	5150.000	38.03	3.35	41.38	54.00	-12.62	AVG
3	5350.000	37.19	3.62	40.81	54.00	-13.19	AVG
4	5399.800	37.20	3.68	40.88	54.00	-13.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

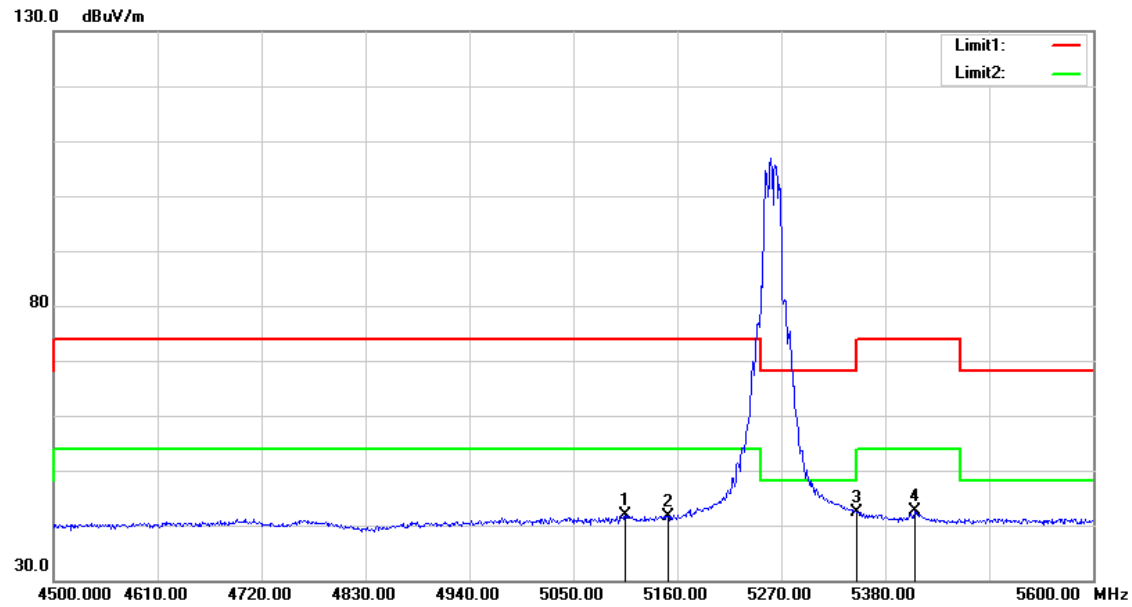


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5105.000	38.70	3.29	41.99	54.00	-12.01	AVG
2	5150.000	38.34	3.35	41.69	54.00	-12.31	AVG
3	5350.000	38.72	3.62	42.34	54.00	-11.66	AVG
4	5411.900	38.87	3.70	42.57	54.00	-11.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

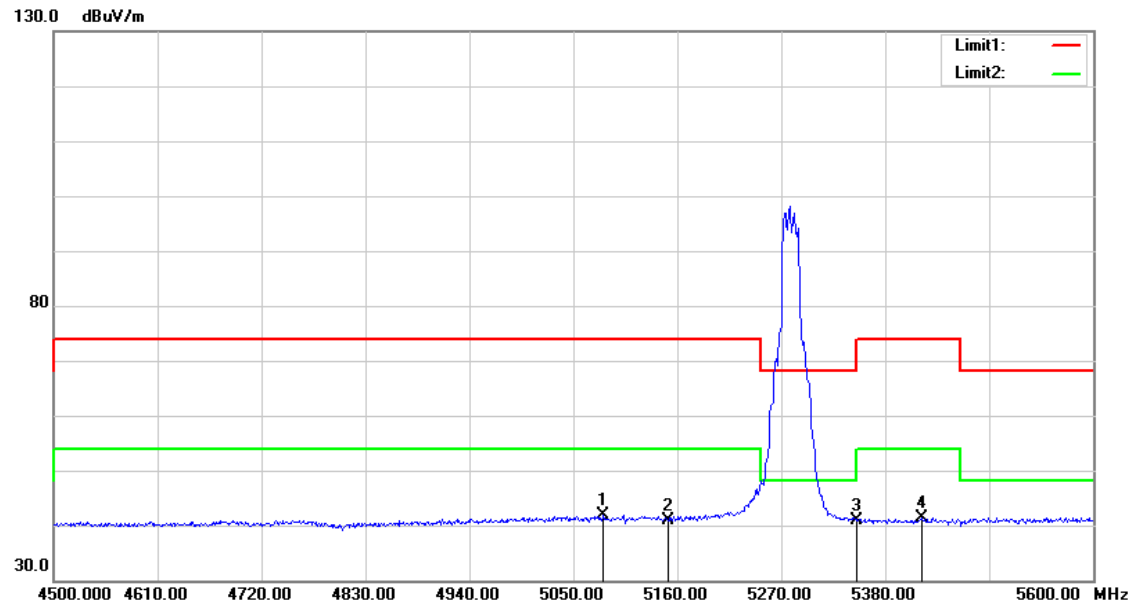


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5081.900	38.54	3.26	41.80	54.00	-12.20	AVG
2	5150.000	37.53	3.35	40.88	54.00	-13.12	AVG
3	5350.000	37.20	3.62	40.82	54.00	-13.18	AVG
4	5418.500	37.67	3.70	41.37	54.00	-12.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

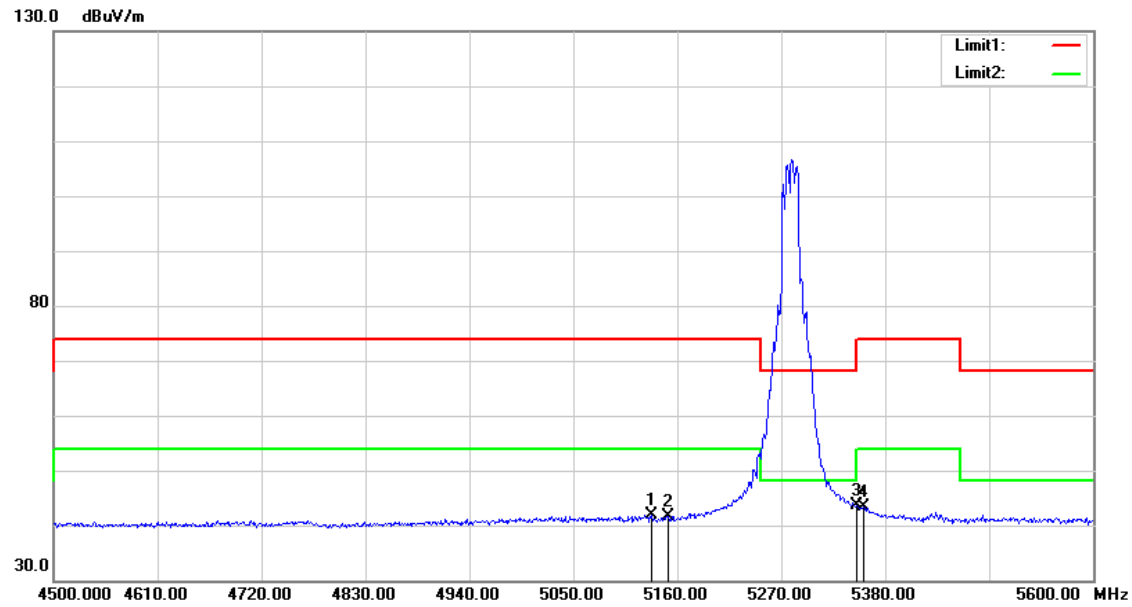


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5132.500	38.55	3.33	41.88	54.00	-12.12	AVG
2	5150.000	38.24	3.35	41.59	54.00	-12.41	AVG
3	5350.000	39.90	3.62	43.52	54.00	-10.48	AVG
4	5356.900	39.64	3.63	43.27	54.00	-10.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

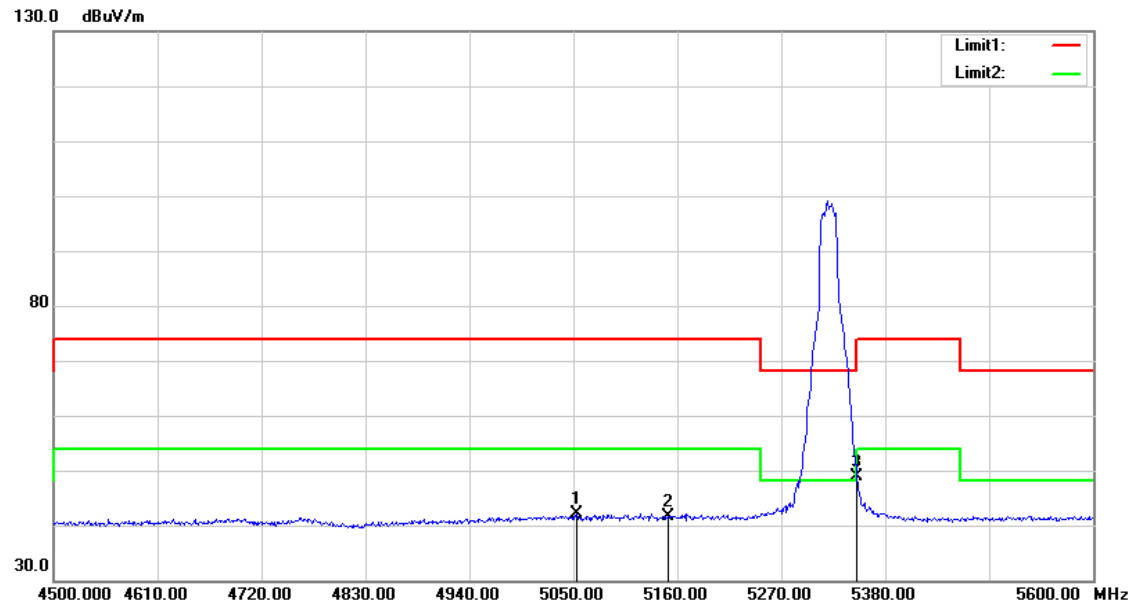


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	38.98	3.22	42.20	54.00	-11.80	AVG
2	5150.000	38.29	3.35	41.64	54.00	-12.36	AVG
3	5350.000	45.18	3.62	48.80	54.00	-5.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

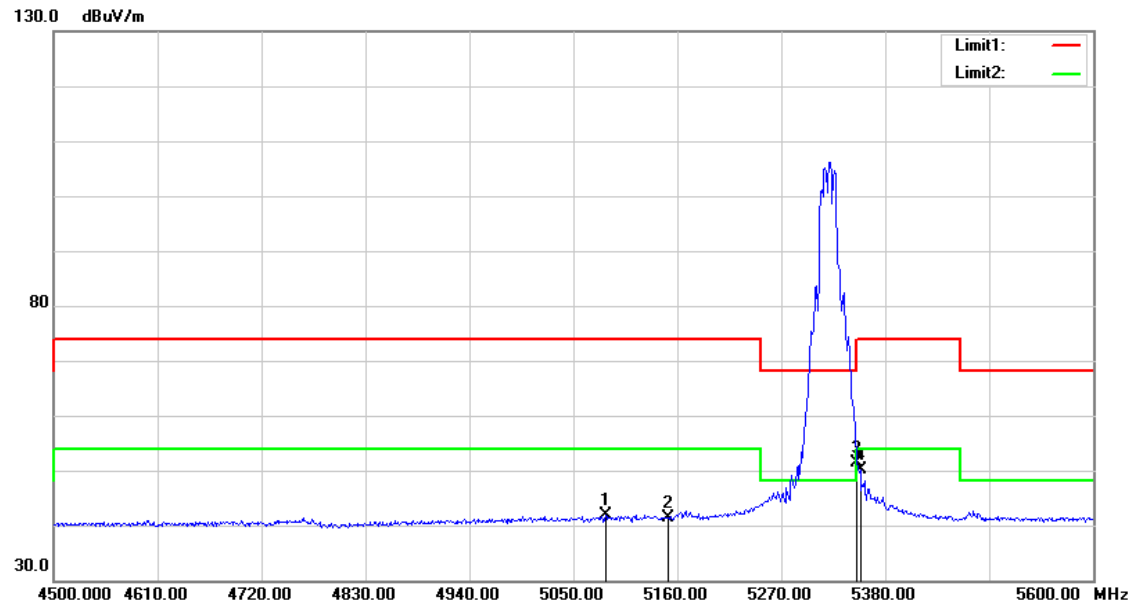


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5084.100	38.72	3.26	41.98	54.00	-12.02	AVG
2	5150.000	37.94	3.35	41.29	54.00	-12.71	AVG
3	5350.000	47.66	3.62	51.28	54.00	-2.72	AVG
4	5353.600	46.62	3.62	50.24	54.00	-3.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

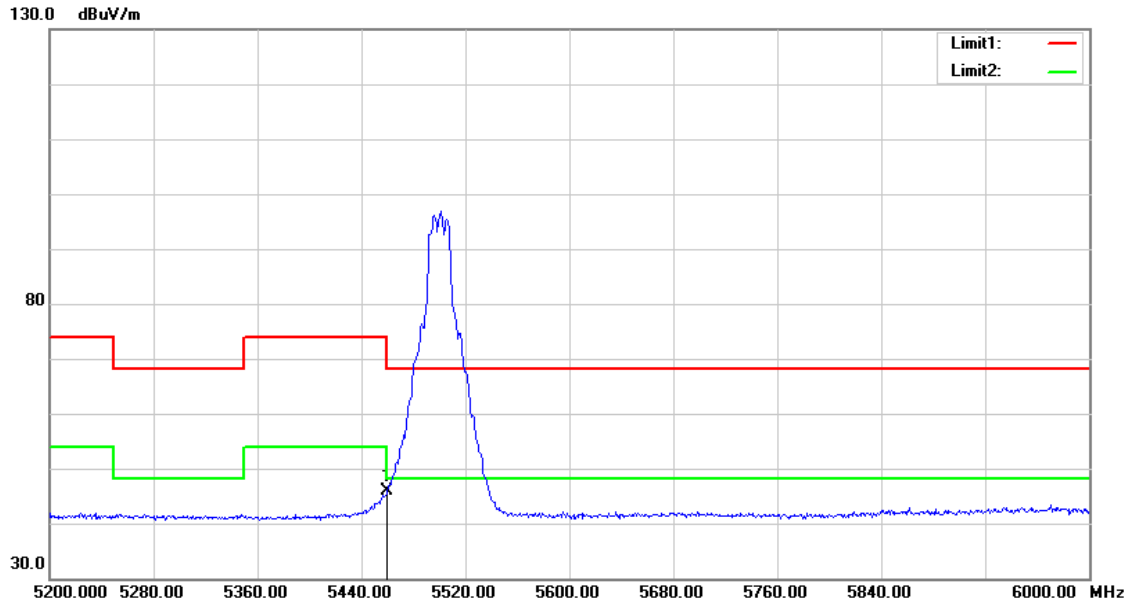


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	42.18	3.76	45.94	54.00	-8.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

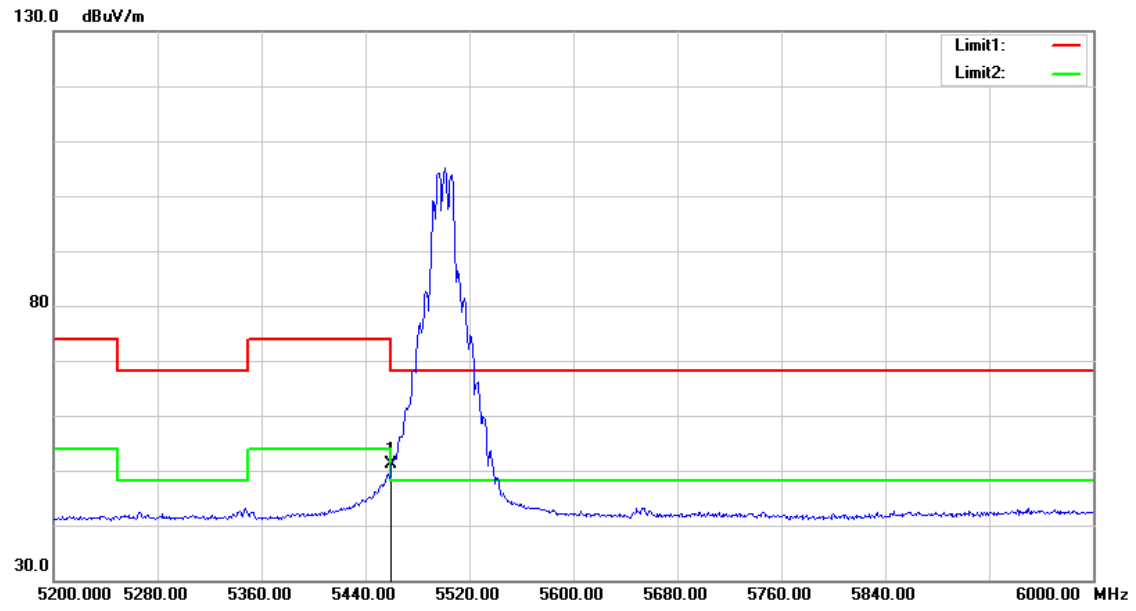


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	47.46	3.76	51.22	54.00	-2.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

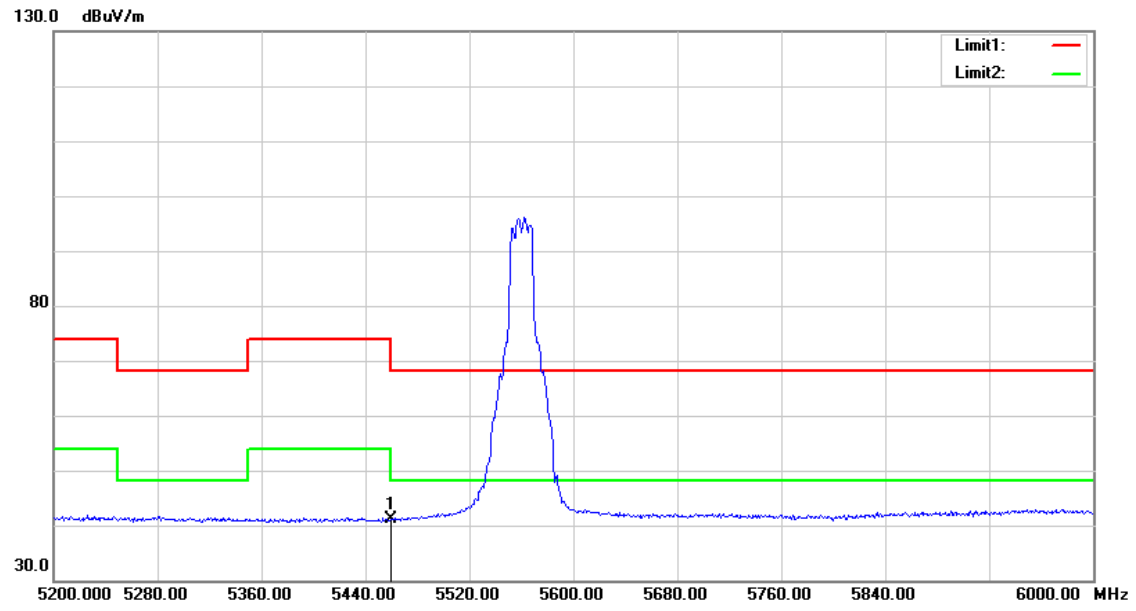


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.43	3.76	41.19	54.00	-12.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

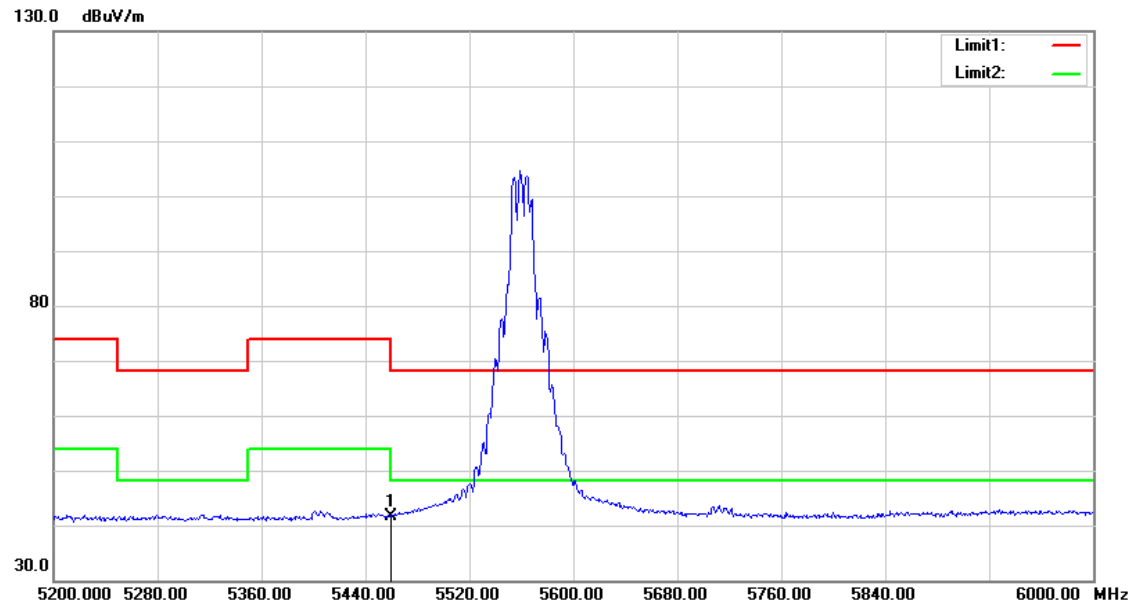


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.90	3.76	41.66	54.00	-12.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

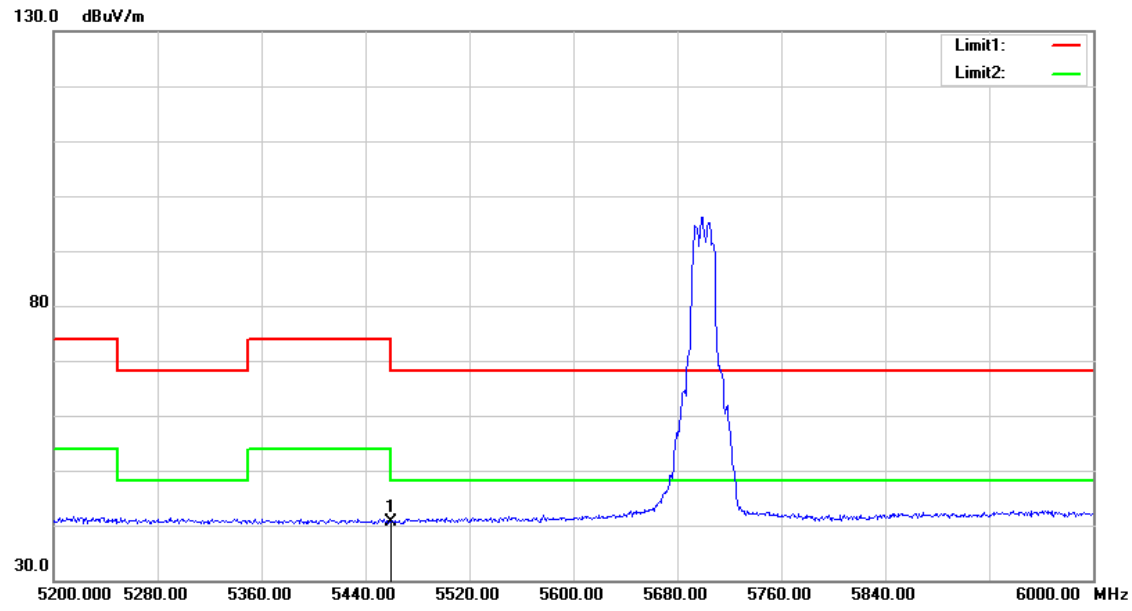


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	36.82	3.76	40.58	54.00	-13.42	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

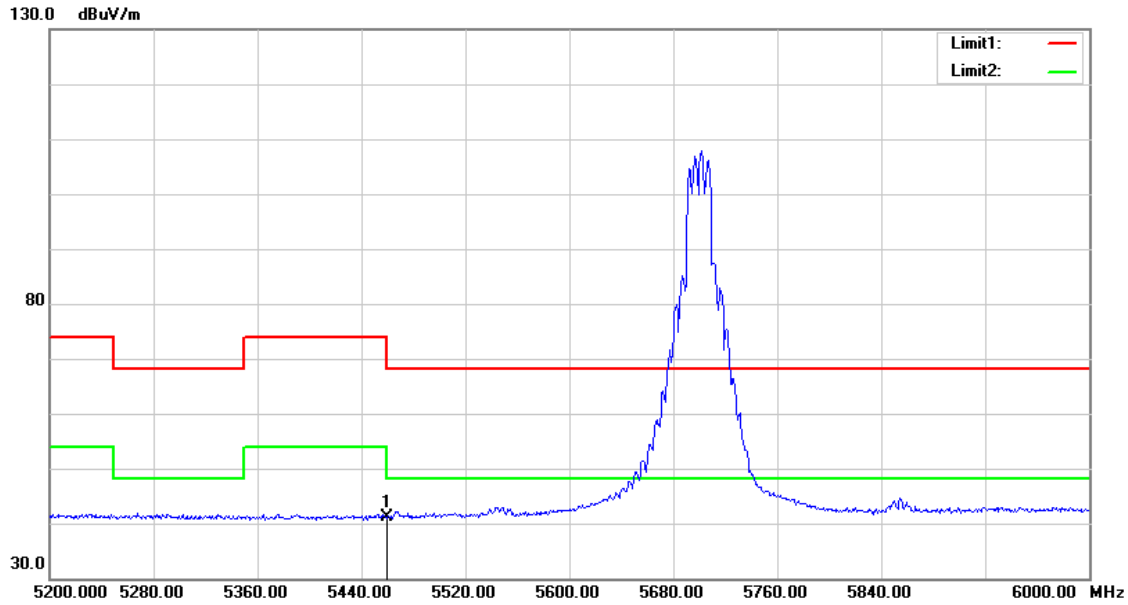


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.30	3.76	41.06	54.00	-12.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

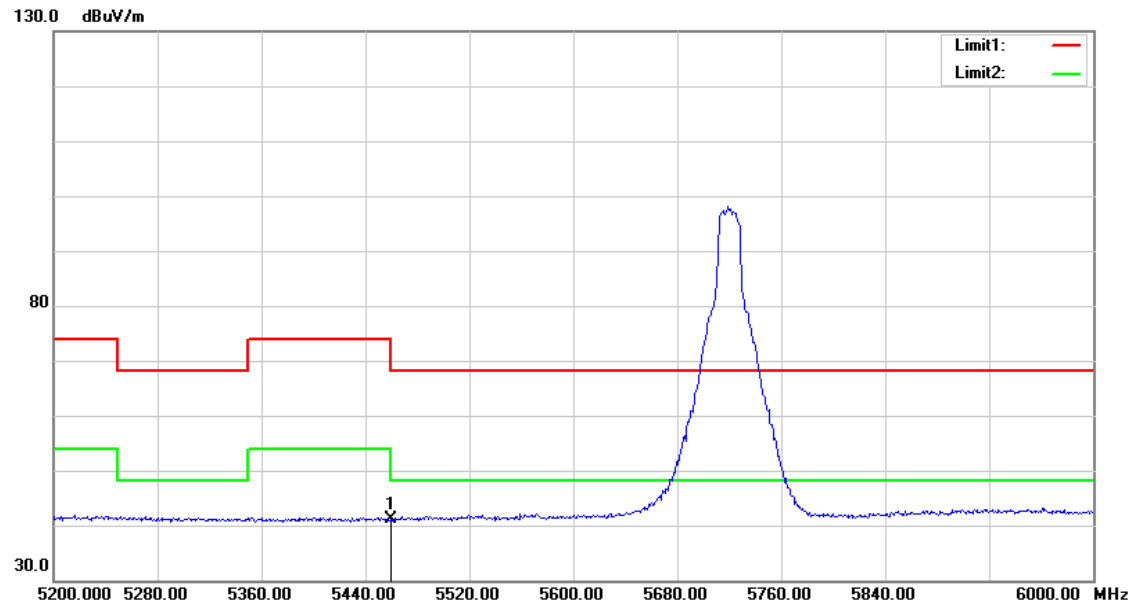


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.40	3.76	41.16	54.00	-12.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

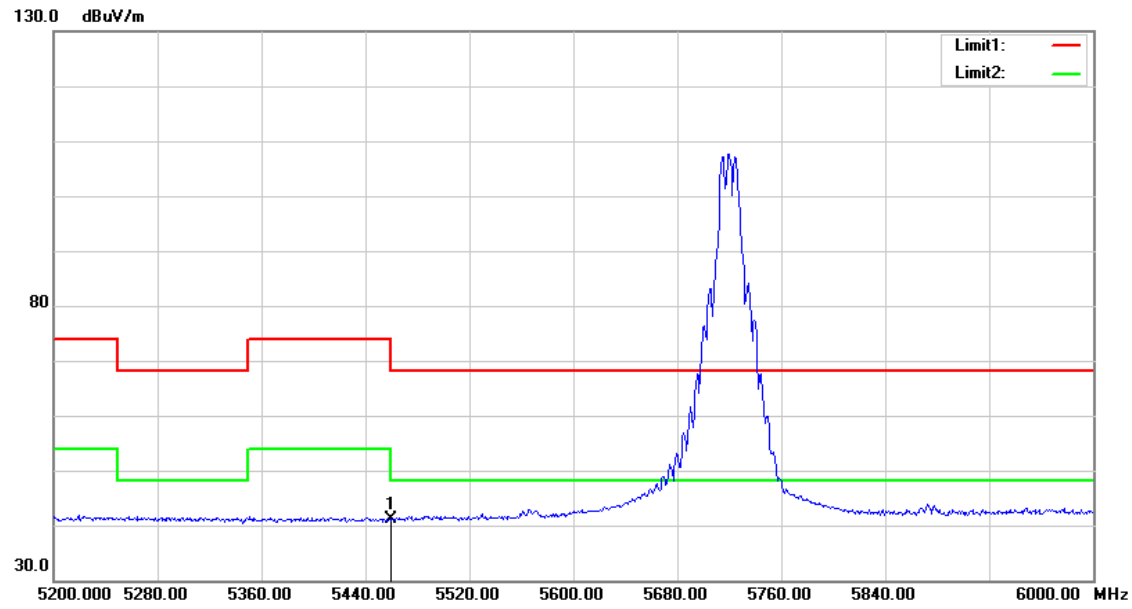


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.40	3.76	41.16	54.00	-12.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

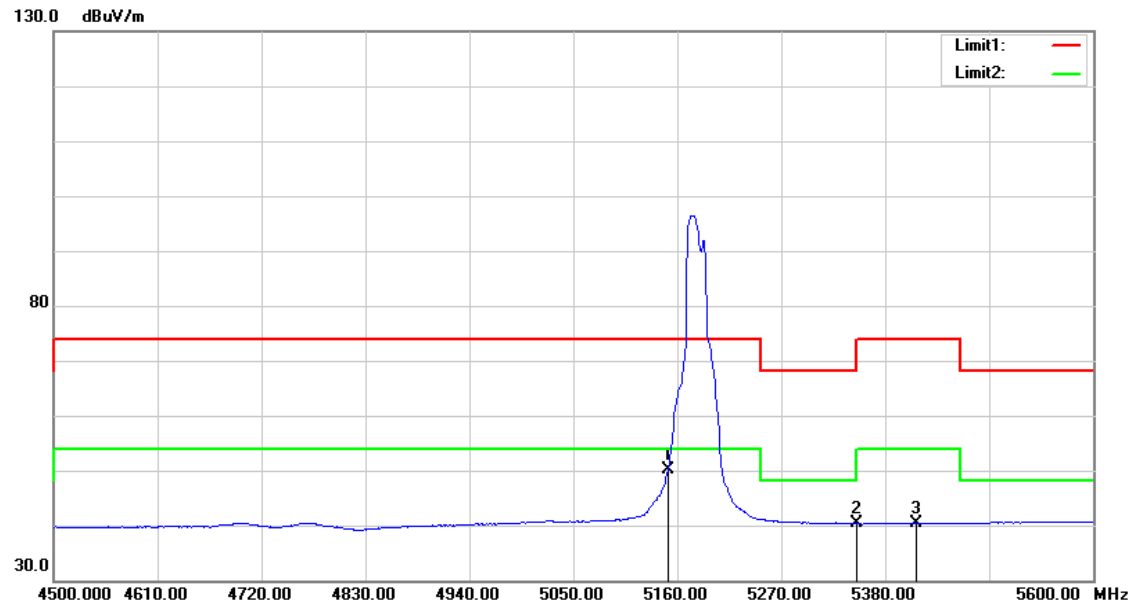


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	46.75	3.35	50.10	54.00	-3.90	AVG
2	5350.000	36.68	3.62	40.30	54.00	-13.70	AVG
3	5413.000	36.74	3.70	40.44	54.00	-13.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

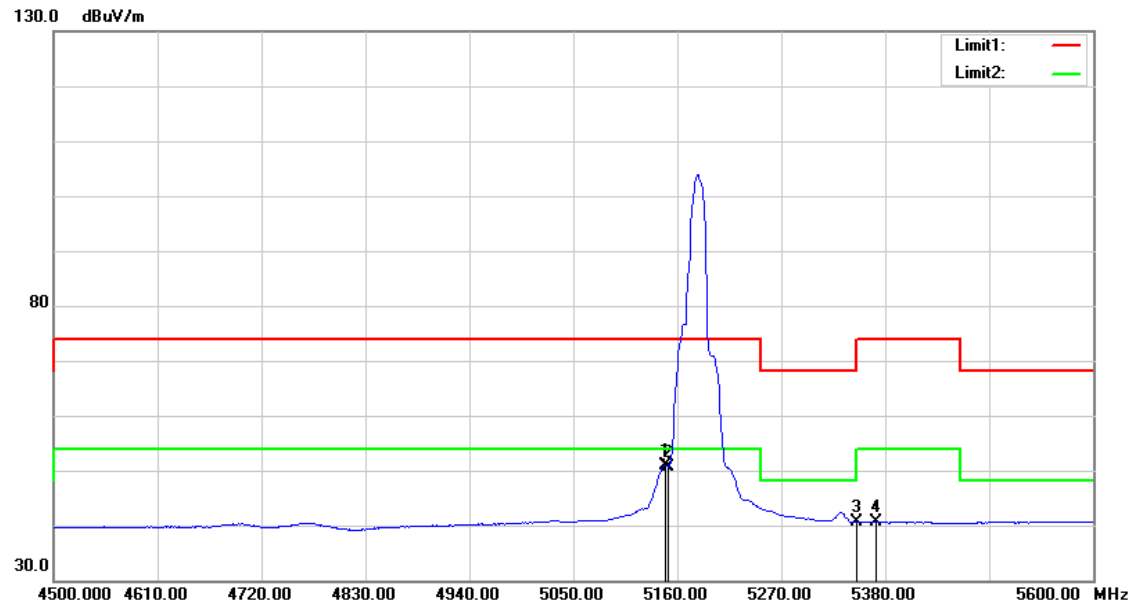


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.900	47.58	3.35	50.93	54.00	-3.07	AVG
2	5150.000	47.39	3.35	50.74	54.00	-3.26	AVG
3	5350.000	37.02	3.62	40.64	54.00	-13.36	AVG
4	5370.100	37.06	3.65	40.71	54.00	-13.29	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

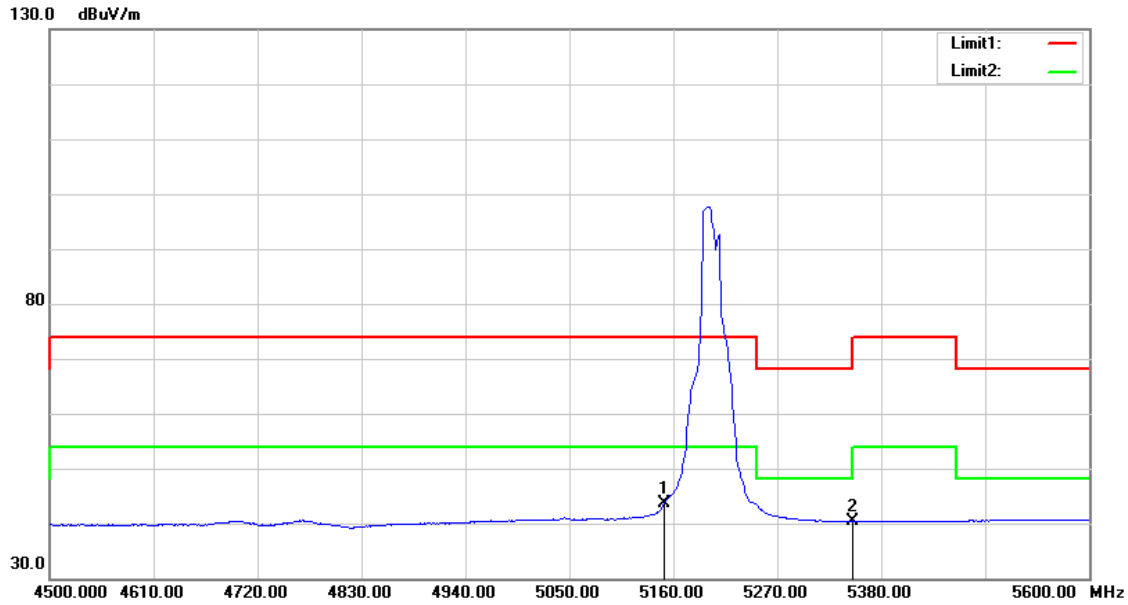


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	40.16	3.35	43.51	54.00	-10.49	AVG
2	5350.000	36.86	3.62	40.48	54.00	-13.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

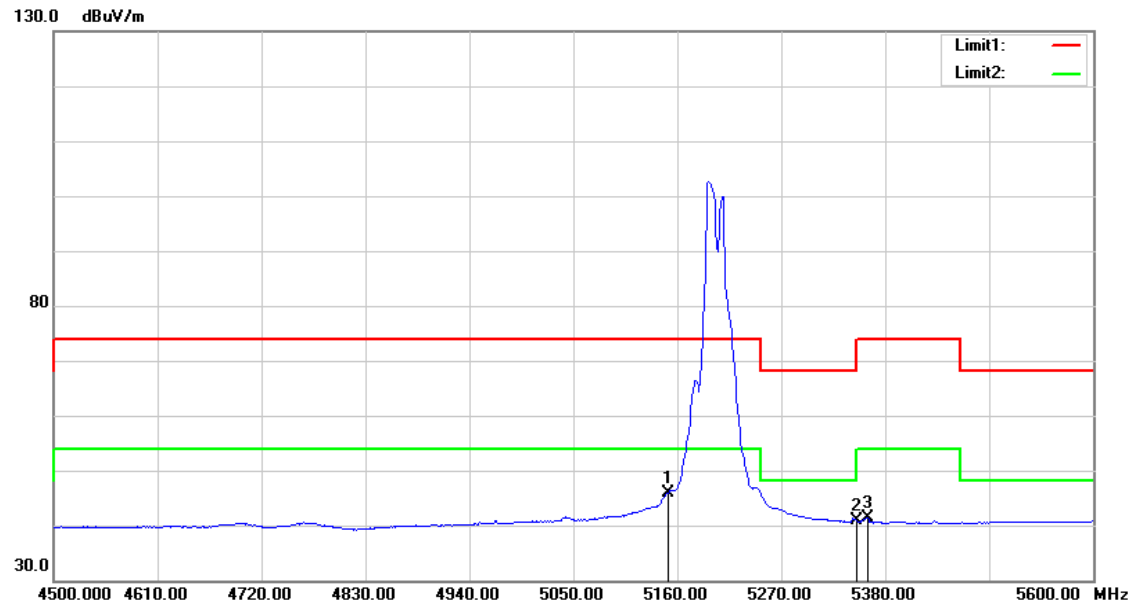


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	42.64	3.35	45.99	54.00	-8.01	AVG
2	5350.000	37.23	3.62	40.85	54.00	-13.15	AVG
3	5361.300	37.64	3.63	41.27	54.00	-12.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

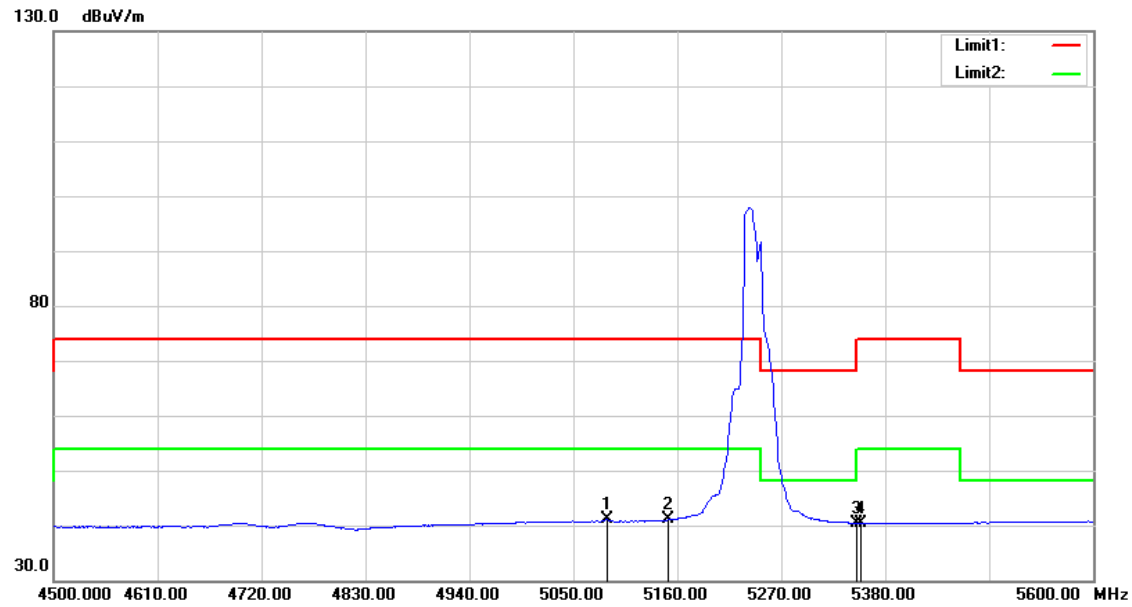


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.200	37.80	3.26	41.06	54.00	-12.94	AVG
2	5150.000	37.67	3.35	41.02	54.00	-12.98	AVG
3	5350.000	36.82	3.62	40.44	54.00	-13.56	AVG
4	5353.600	36.87	3.62	40.49	54.00	-13.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

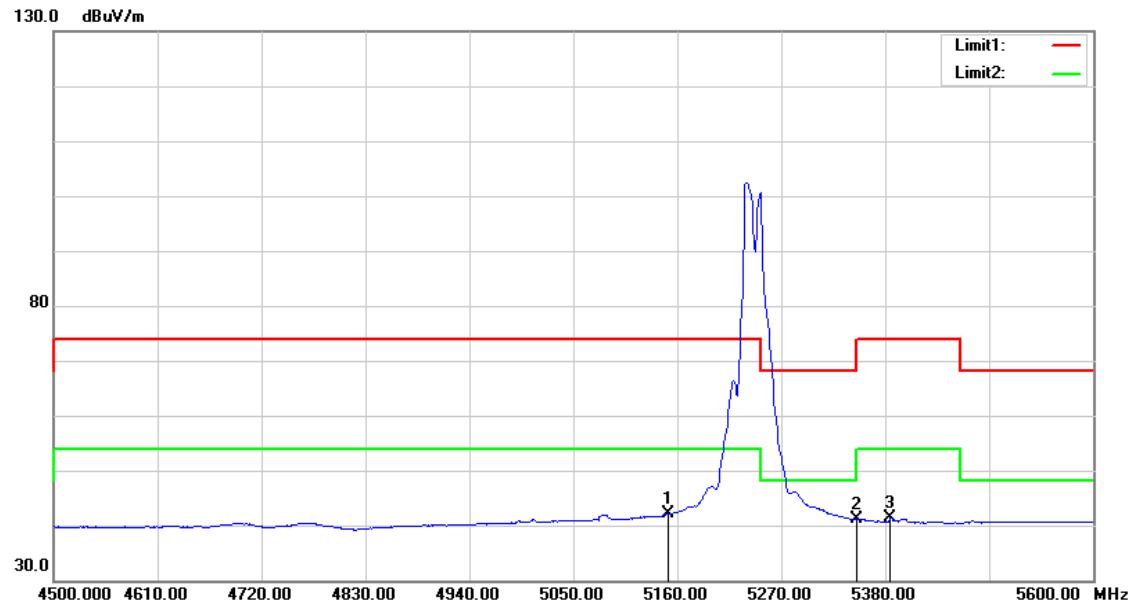


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.70	3.35	42.05	54.00	-11.95	AVG
2	5350.000	37.58	3.62	41.20	54.00	-12.80	AVG
3	5385.500	37.62	3.67	41.29	54.00	-12.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

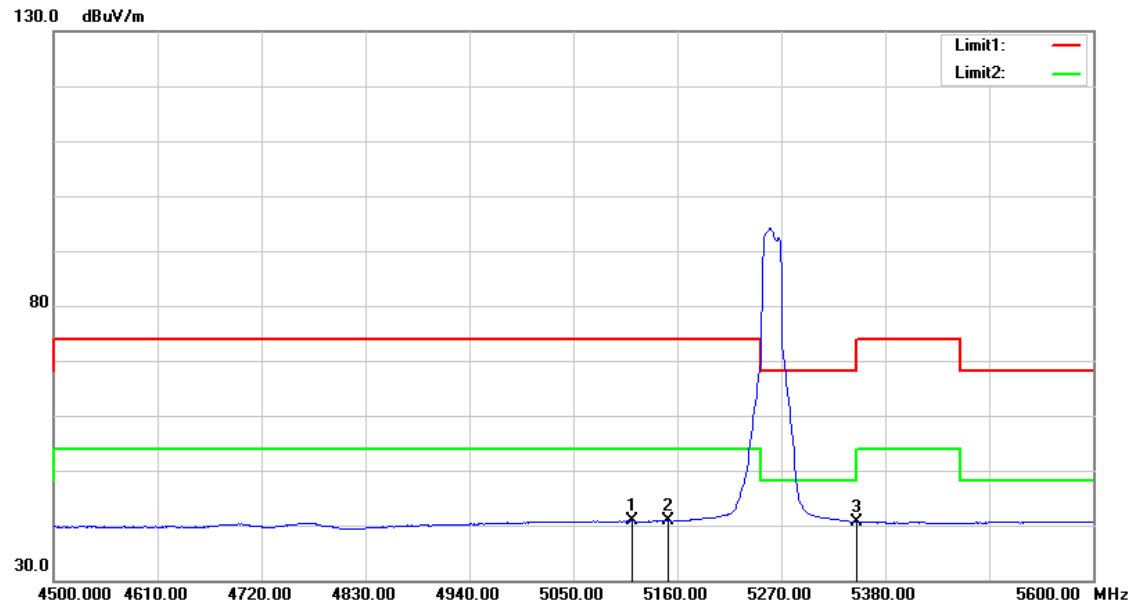


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.700	37.57	3.30	40.87	54.00	-13.13	AVG
2	5150.000	37.47	3.35	40.82	54.00	-13.18	AVG
3	5350.000	37.07	3.62	40.69	54.00	-13.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

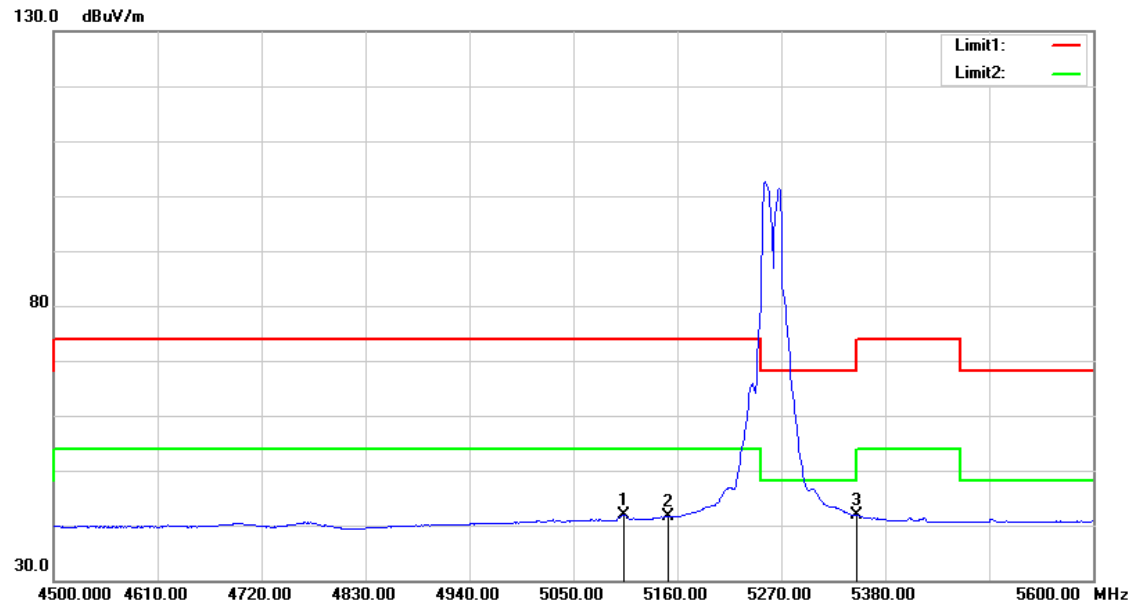


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5103.900	38.55	3.29	41.84	54.00	-12.16	AVG
2	5150.000	38.21	3.35	41.56	54.00	-12.44	AVG
3	5350.000	38.16	3.62	41.78	54.00	-12.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

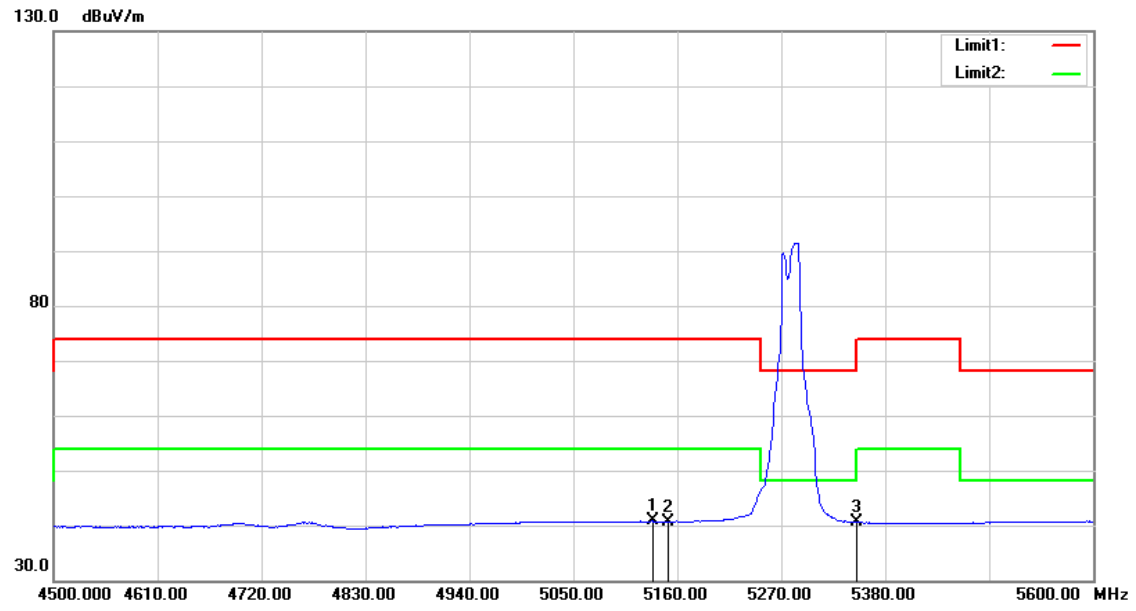


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5134.700	37.45	3.33	40.78	54.00	-13.22	AVG
2	5150.000	37.34	3.35	40.69	54.00	-13.31	AVG
3	5350.000	36.99	3.62	40.61	54.00	-13.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

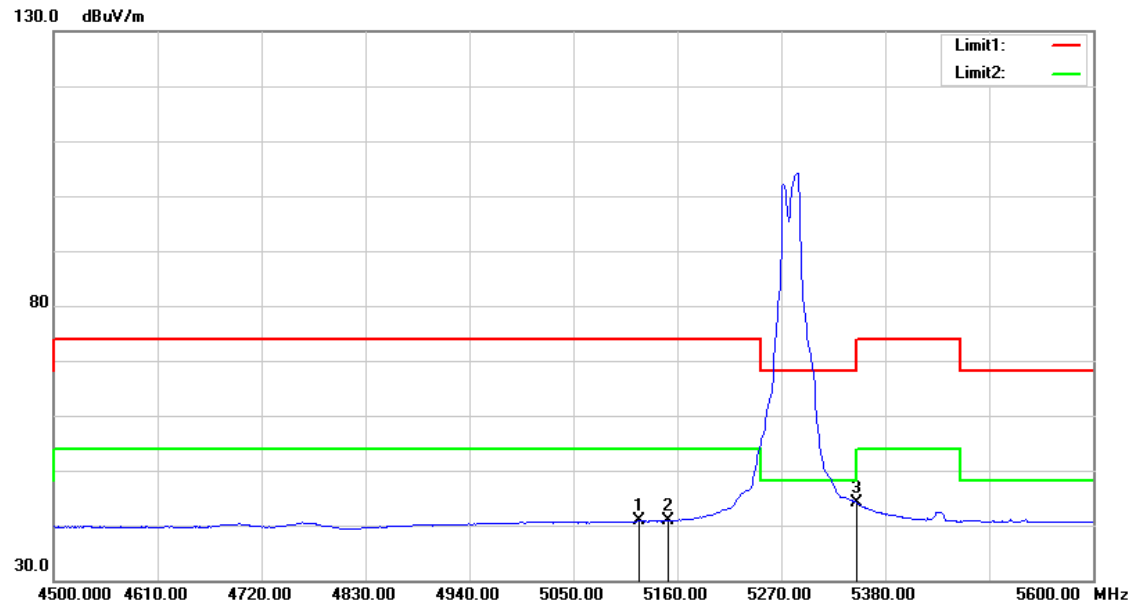


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	37.66	3.32	40.98	54.00	-13.02	AVG
2	5150.000	37.50	3.35	40.85	54.00	-13.15	AVG
3	5350.000	40.46	3.62	44.08	54.00	-9.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

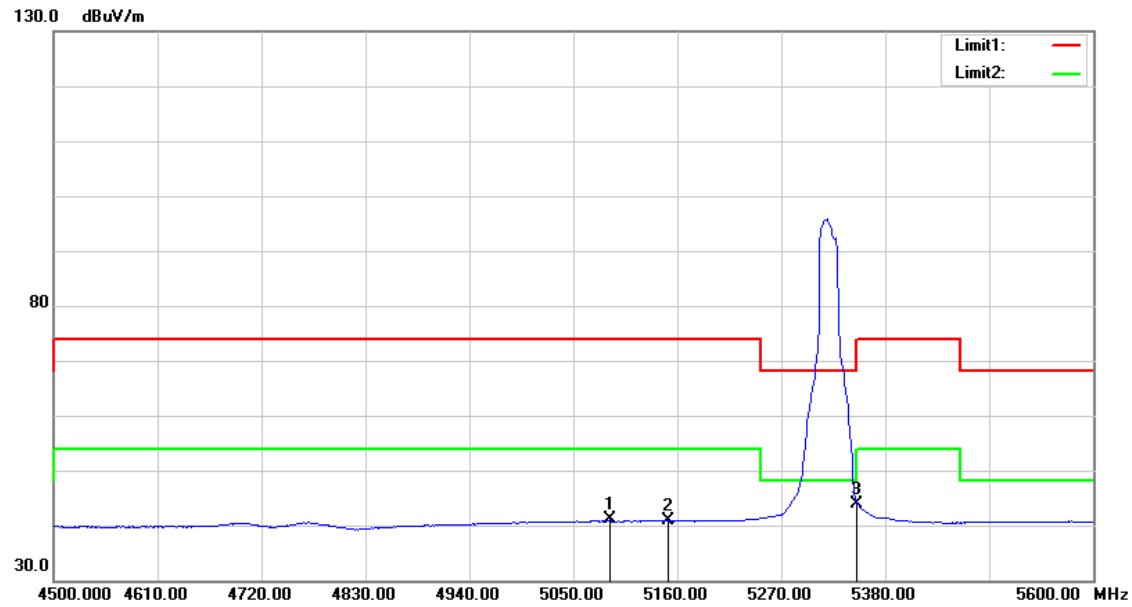


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	37.78	3.26	41.04	54.00	-12.96	AVG
2	5150.000	37.44	3.35	40.79	54.00	-13.21	AVG
3	5350.000	40.32	3.62	43.94	54.00	-10.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

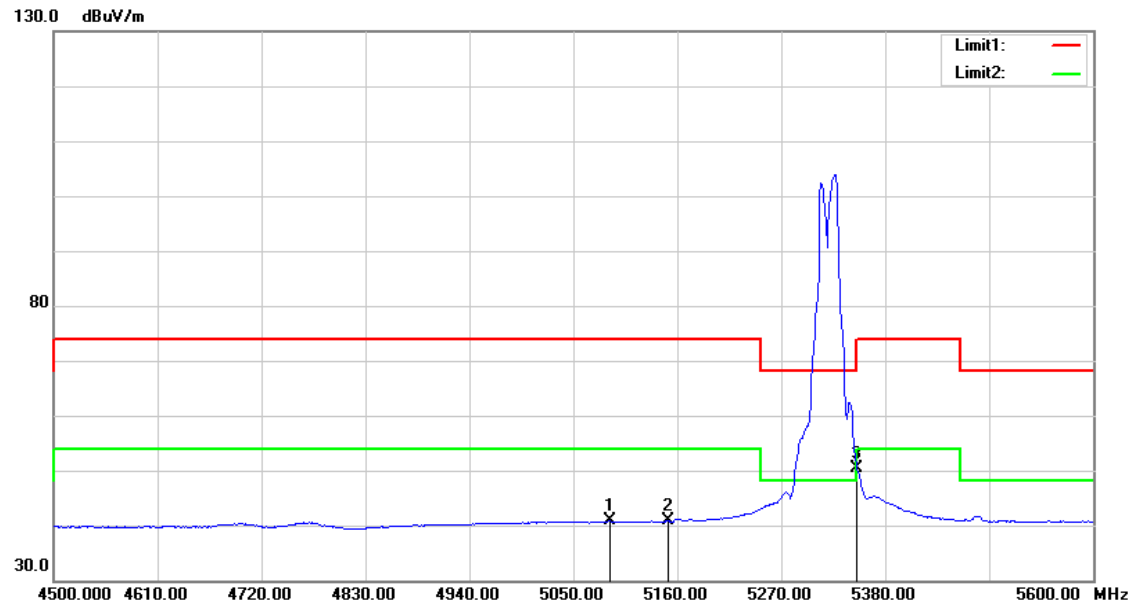


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	37.55	3.26	40.81	54.00	-13.19	AVG
2	5150.000	37.41	3.35	40.76	54.00	-13.24	AVG
3	5350.000	46.87	3.62	50.49	54.00	-3.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

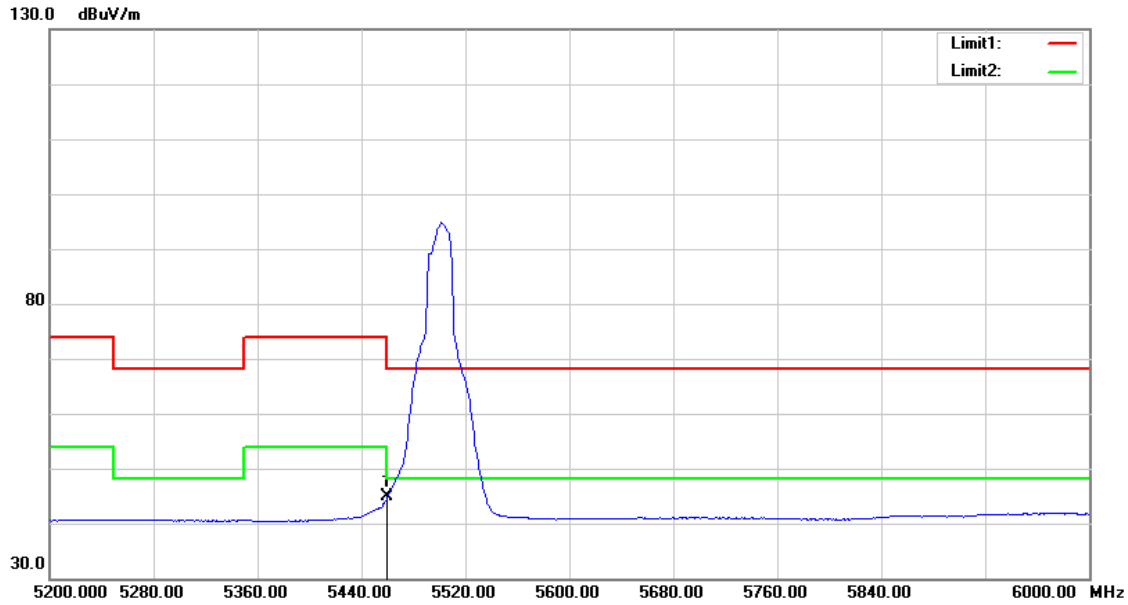


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	41.00	3.76	44.76	54.00	-9.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

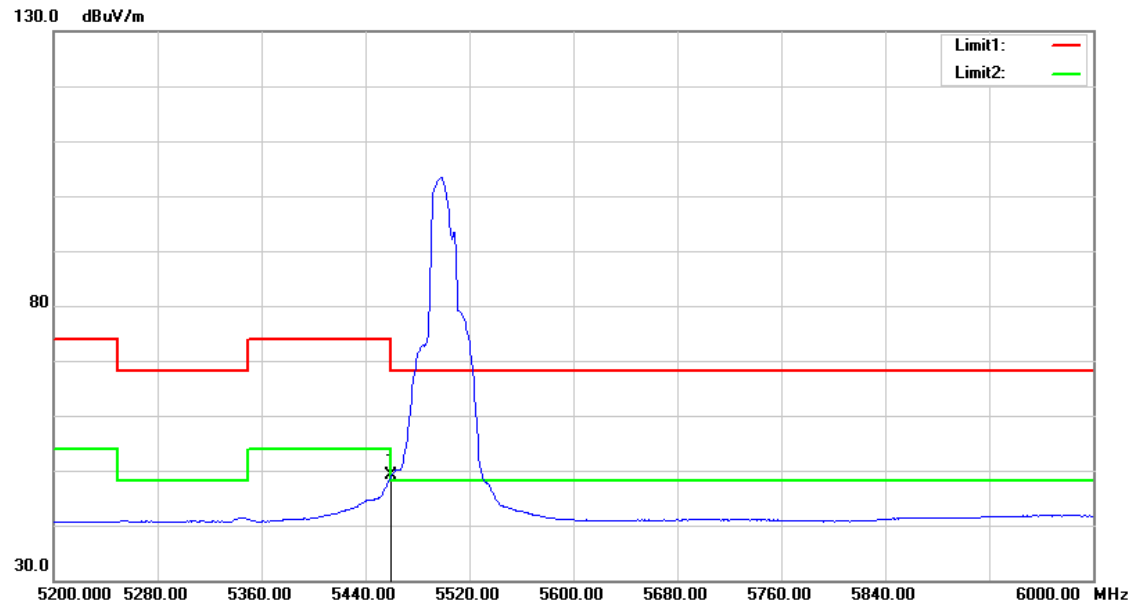


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	45.39	3.76	49.15	54.00	-4.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

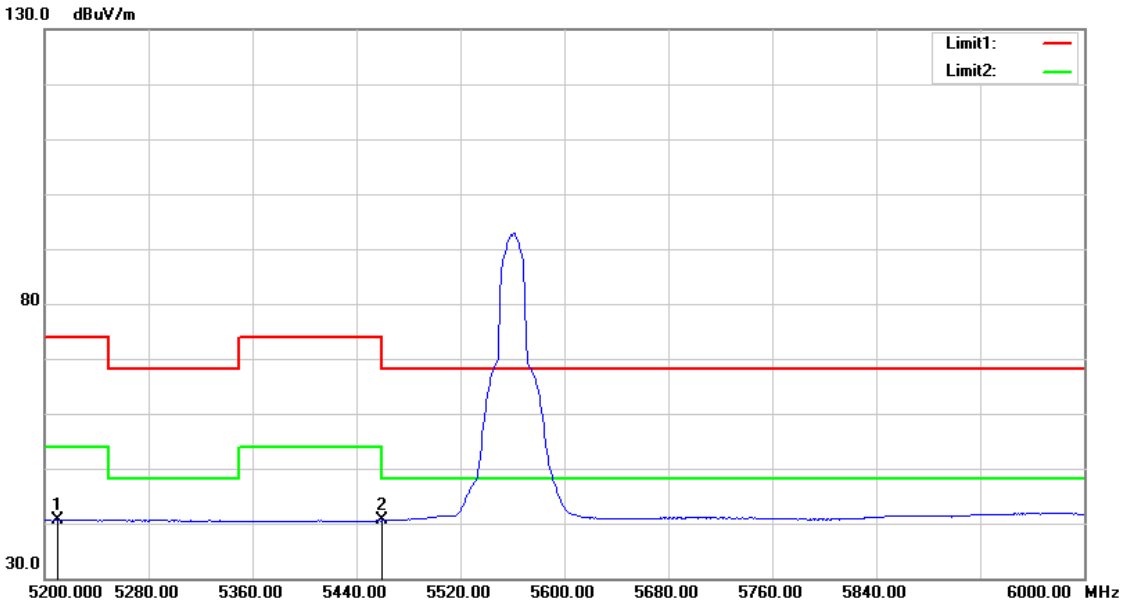


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	37.24	3.43	40.67	54.00	-13.33	AVG
2	5460.000	36.75	3.76	40.51	54.00	-13.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

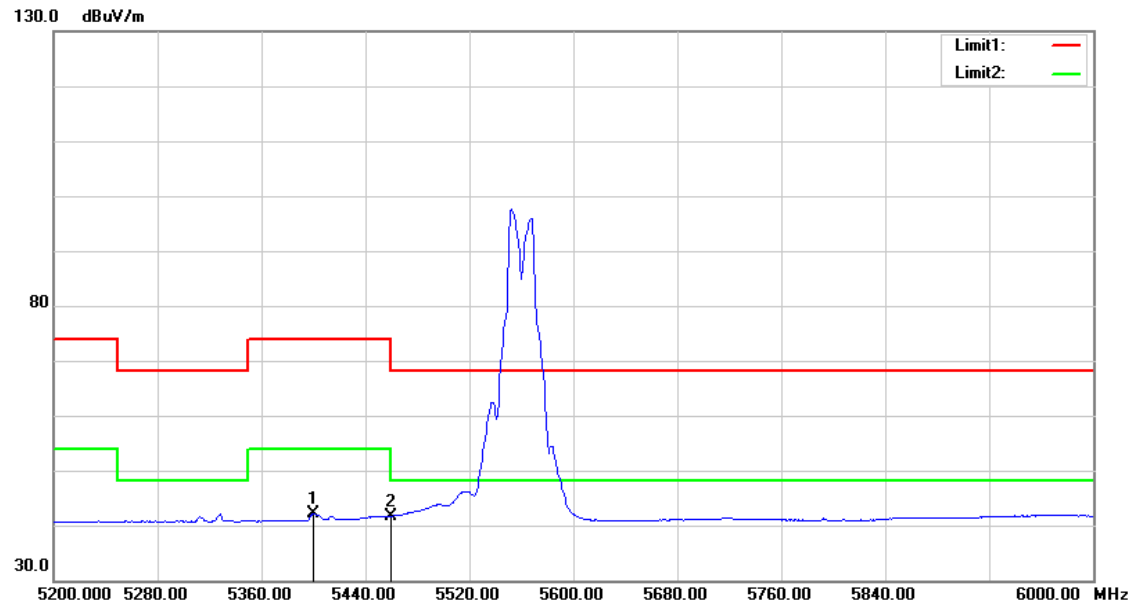


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5400.000	38.42	3.68	42.10	54.00	-11.90	AVG
2	5460.000	37.96	3.76	41.72	54.00	-12.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

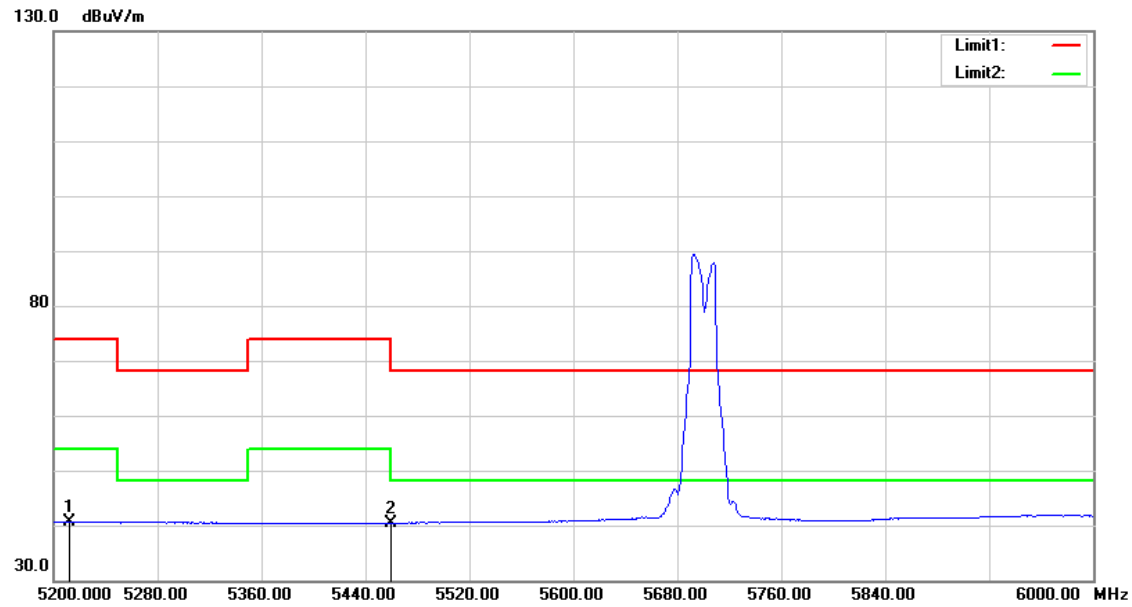


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	37.27	3.43	40.70	54.00	-13.30	AVG
2	5460.000	36.61	3.76	40.37	54.00	-13.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

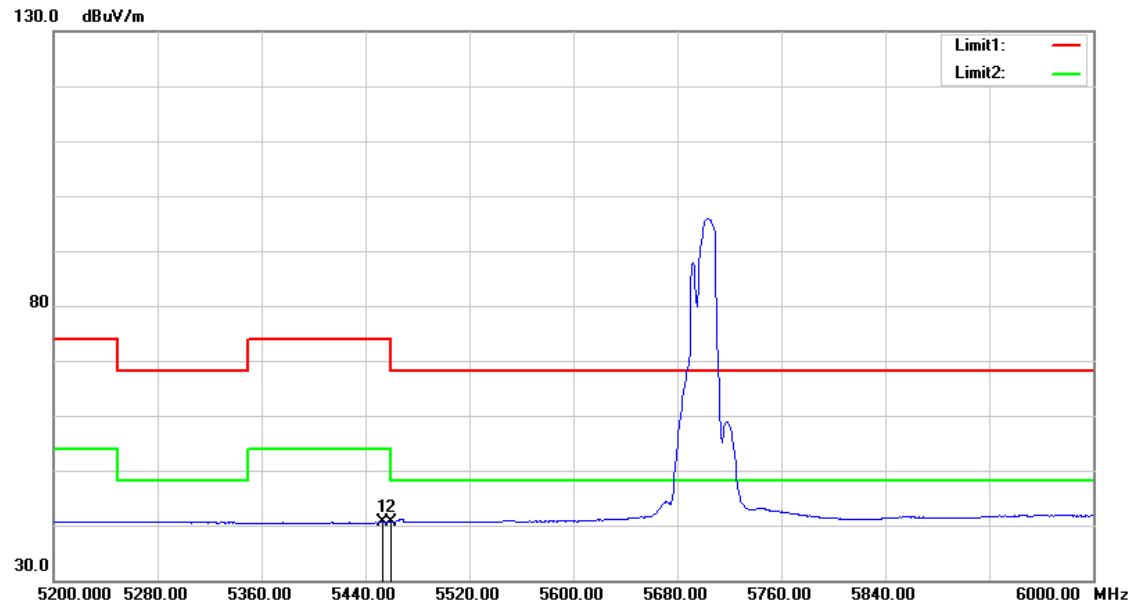


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	36.90	3.75	40.65	54.00	-13.35	AVG
2	5460.000	36.75	3.76	40.51	54.00	-13.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

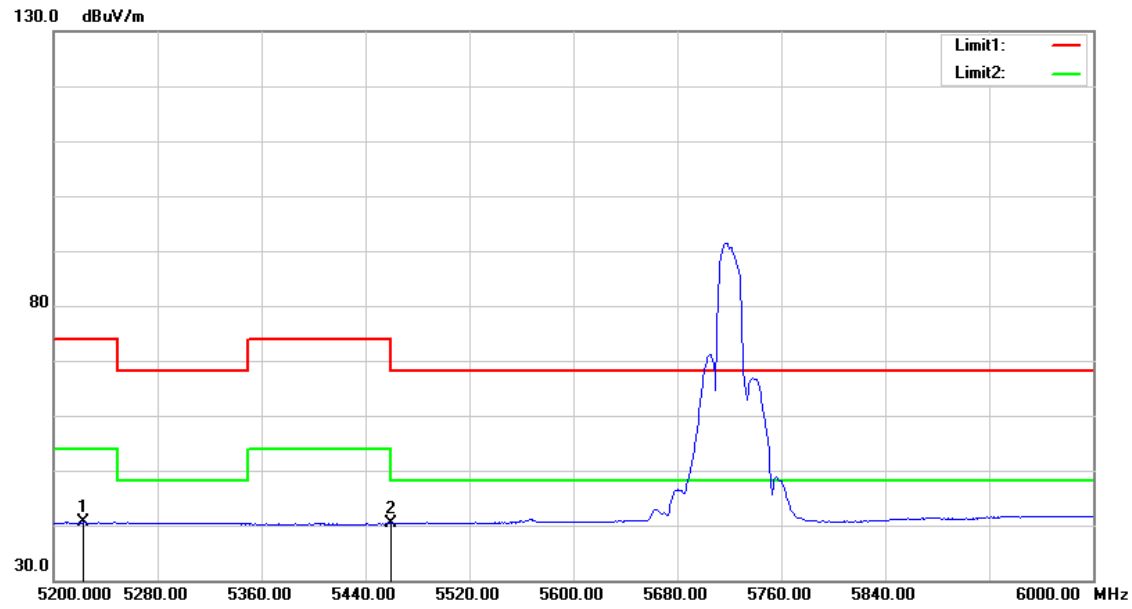


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	37.07	3.45	40.52	54.00	-13.48	AVG
2	5460.000	36.51	3.76	40.27	54.00	-13.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

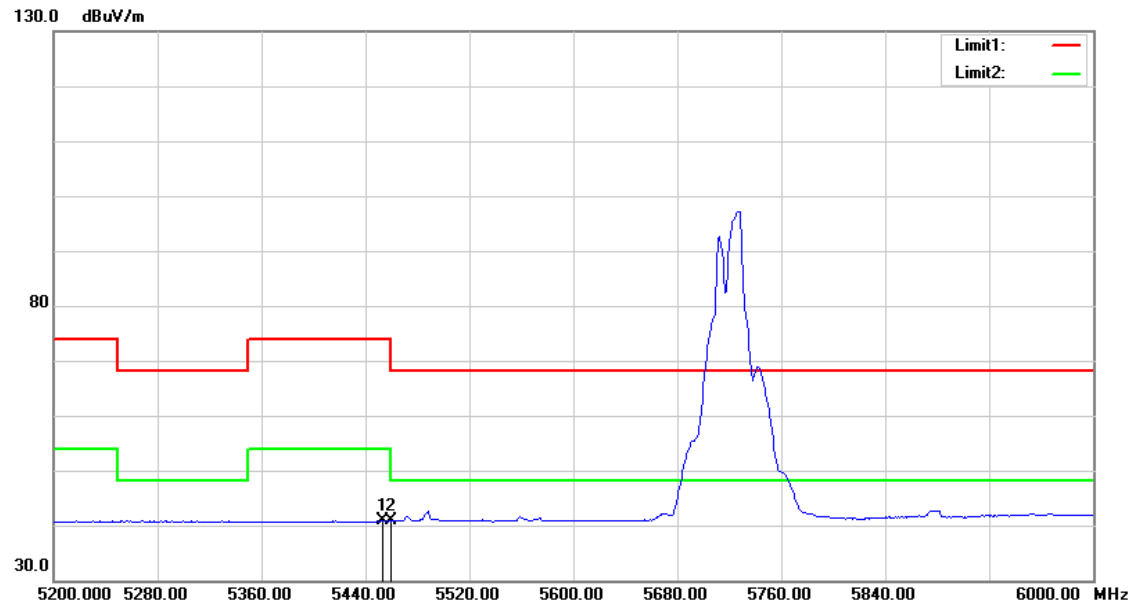


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	37.13	3.75	40.88	54.00	-13.12	AVG
2	5460.000	37.01	3.76	40.77	54.00	-13.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

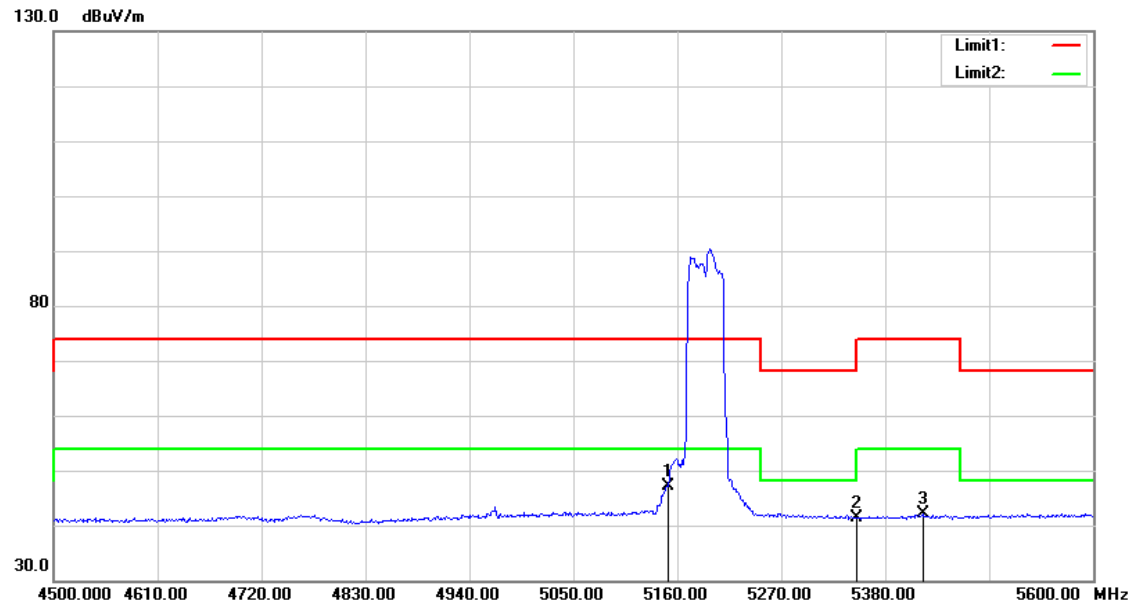


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	43.66	3.35	47.01	54.00	-6.99	AVG
2	5350.000	37.79	3.62	41.41	54.00	-12.59	AVG
3	5420.700	38.43	3.71	42.14	54.00	-11.86	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

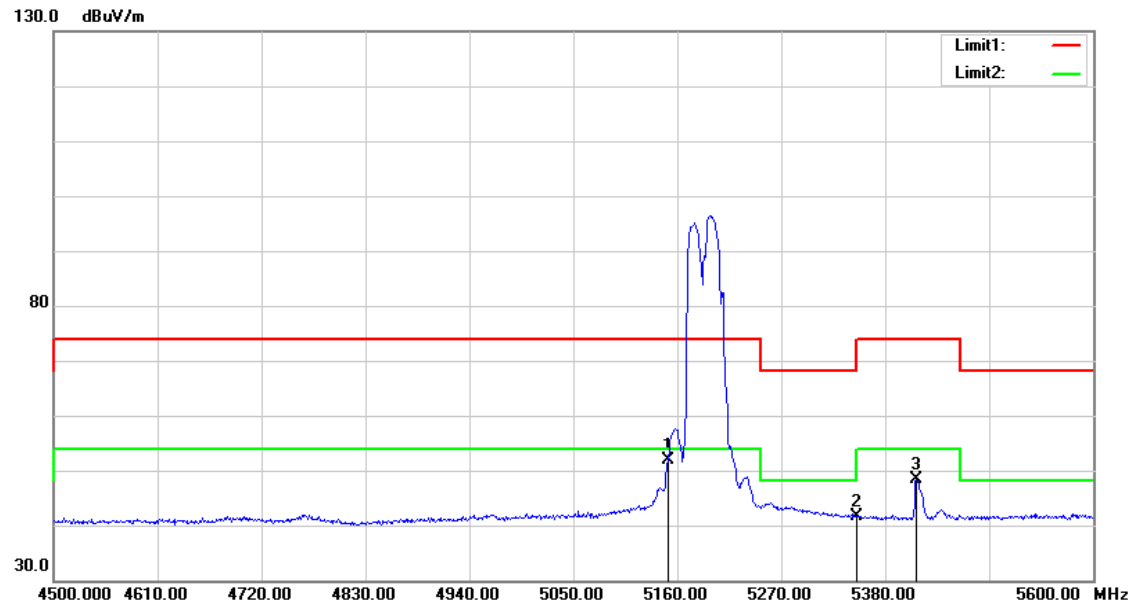


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	48.54	3.35	51.89	54.00	-2.11	AVG
2	5350.000	38.05	3.62	41.67	54.00	-12.33	AVG
3	5413.000	44.79	3.70	48.49	54.00	-5.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

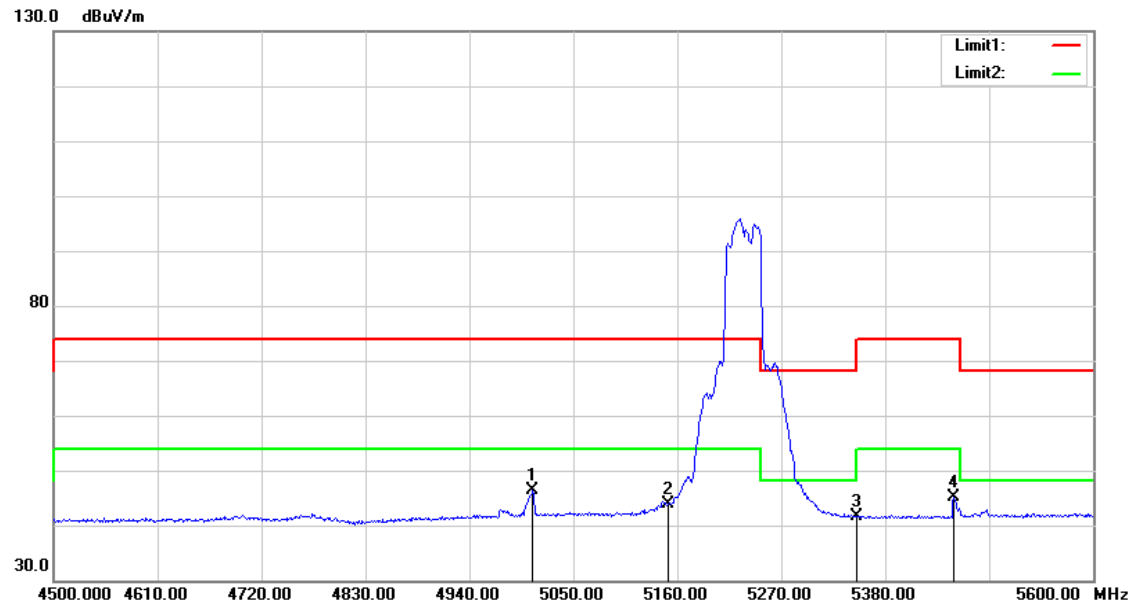


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5007.100	43.14	3.16	46.30	54.00	-7.70	AVG
2	5150.000	40.48	3.35	43.83	54.00	-10.17	AVG
3	5350.000	38.11	3.62	41.73	54.00	-12.27	AVG
4	5452.600	41.27	3.75	45.02	54.00	-8.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

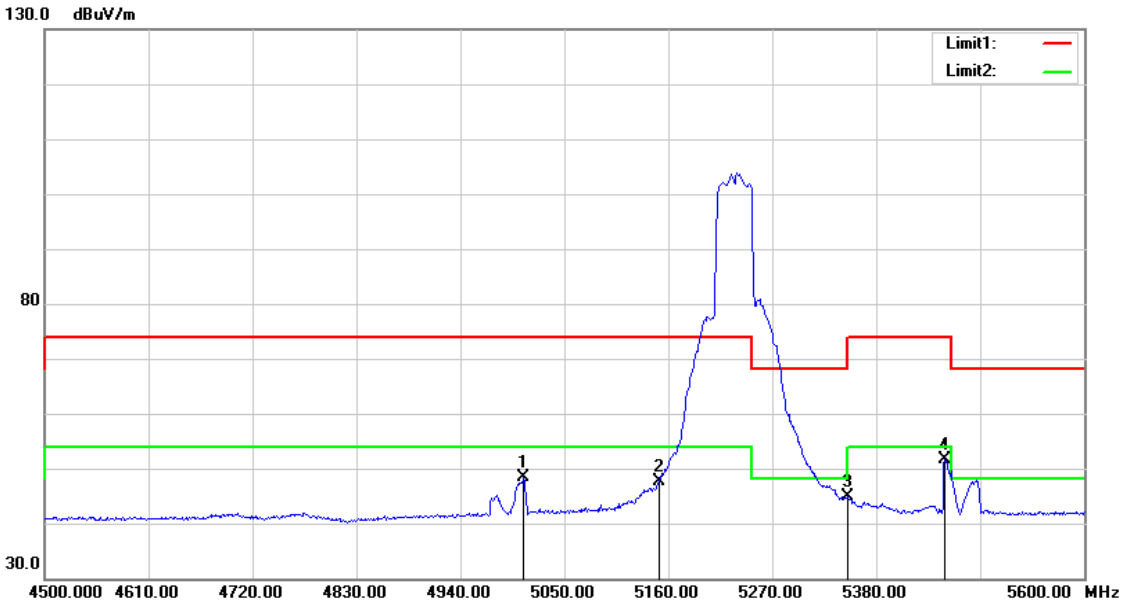


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5007.100	45.21	3.16	48.37	54.00	-5.63	AVG
2	5150.000	44.30	3.35	47.65	54.00	-6.35	AVG
3	5350.000	41.16	3.62	44.78	54.00	-9.22	AVG
4	5452.600	47.99	3.75	51.74	54.00	-2.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

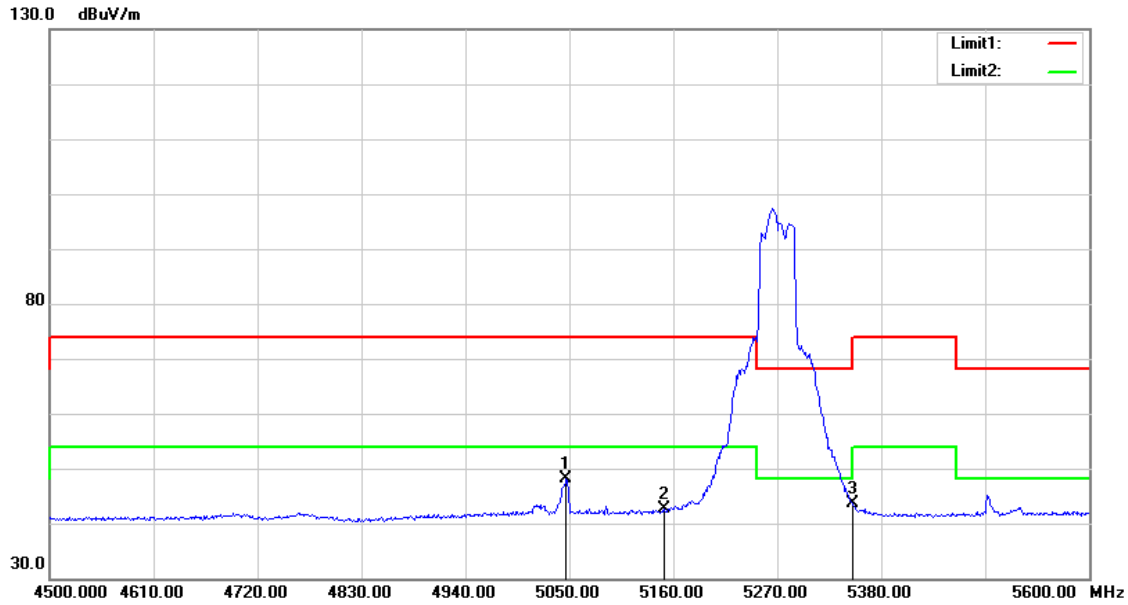


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.700	44.87	3.21	48.08	54.00	-5.92	AVG
2	5150.000	39.16	3.35	42.51	54.00	-11.49	AVG
3	5350.000	39.98	3.62	43.60	54.00	-10.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

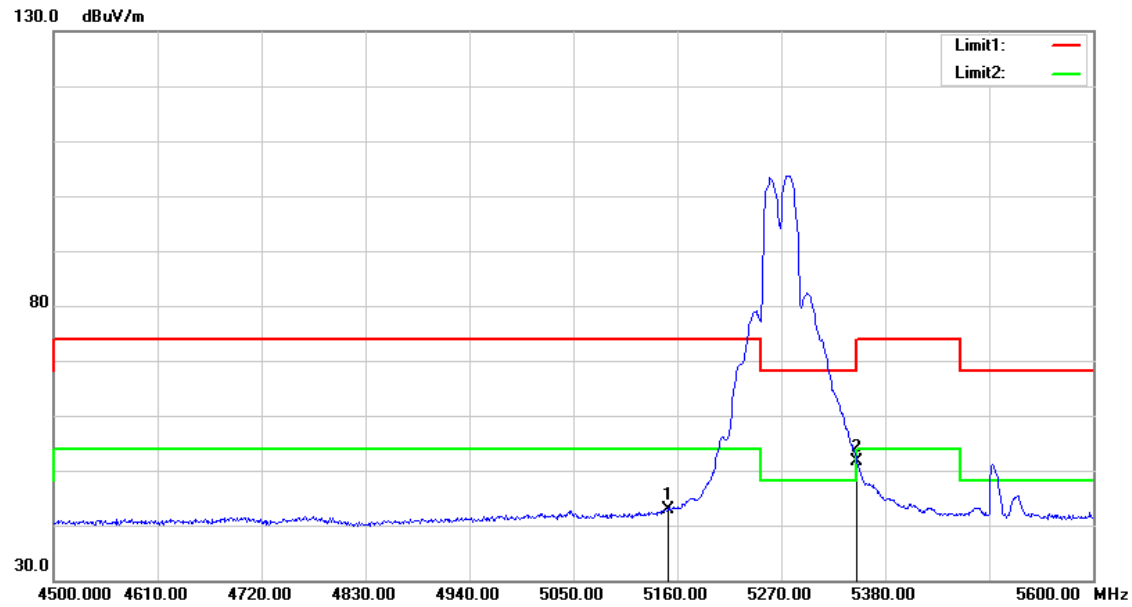


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.53	3.35	42.88	54.00	-11.12	AVG
2	5350.000	48.10	3.62	51.72	54.00	-2.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

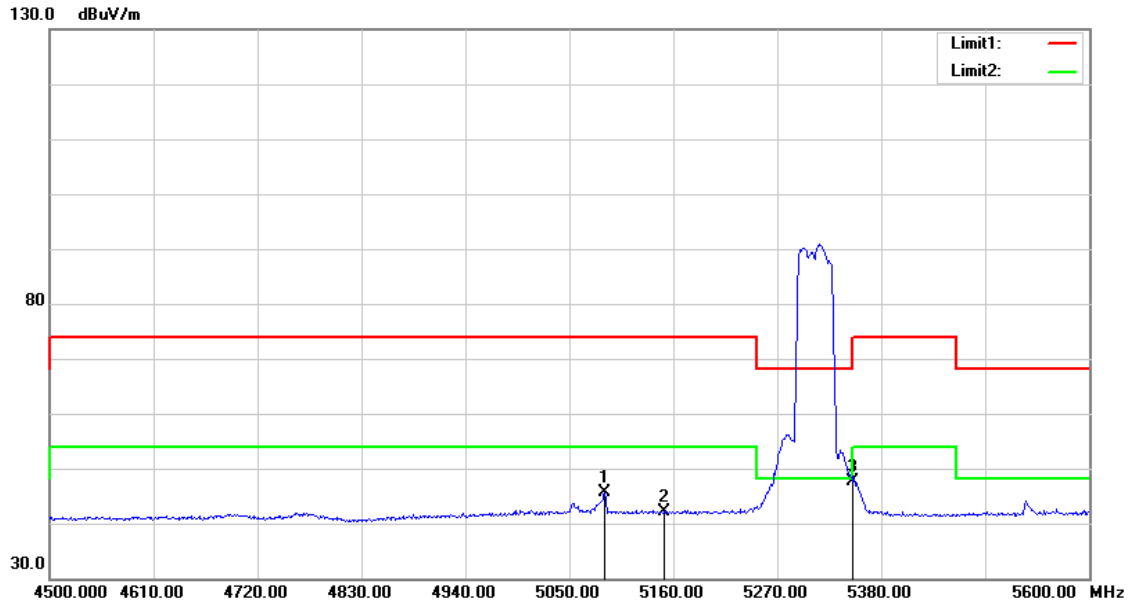


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.400	42.35	3.26	45.61	54.00	-8.39	AVG
2	5150.000	38.69	3.35	42.04	54.00	-11.96	AVG
3	5350.000	43.91	3.62	47.53	54.00	-6.47	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

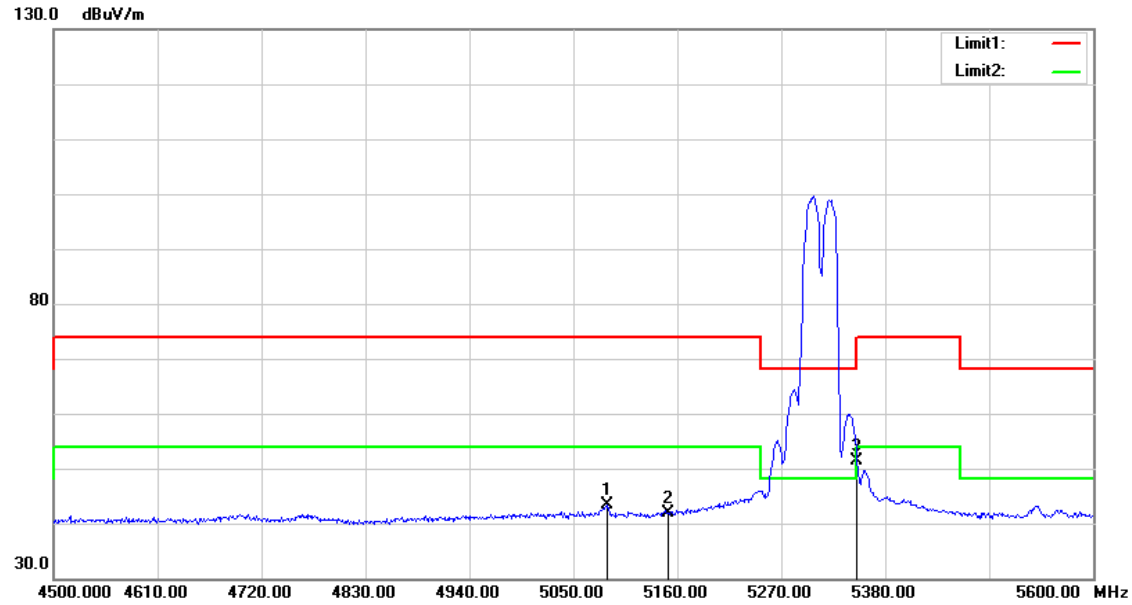


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.300	40.01	3.26	43.27	54.00	-10.73	AVG
2	5150.000	38.62	3.35	41.97	54.00	-12.03	AVG
3	5350.000	47.85	3.62	51.47	54.00	-2.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

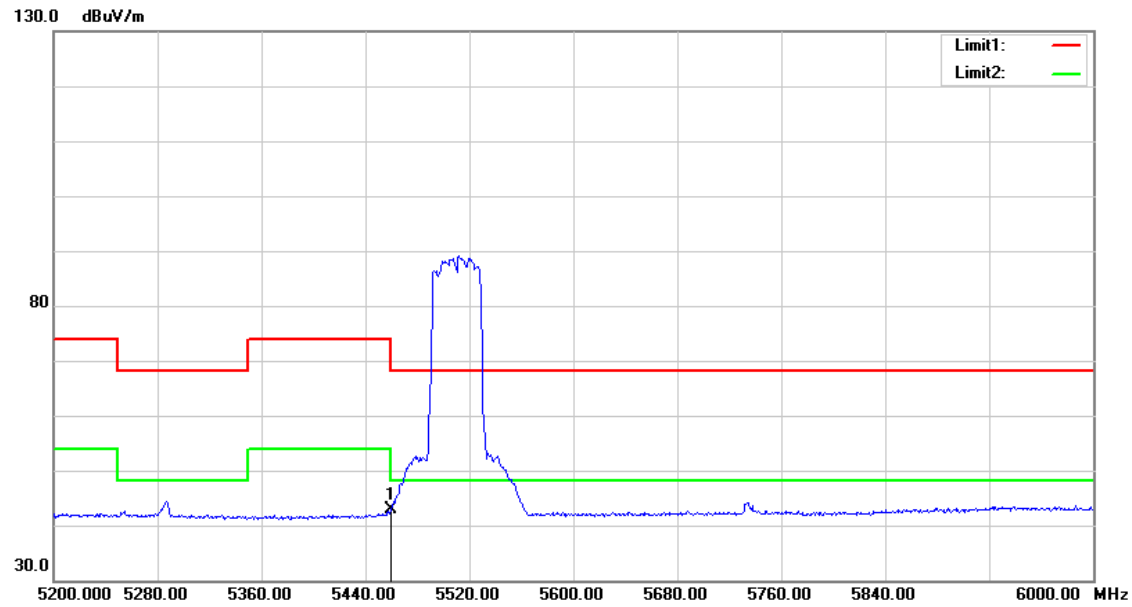


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	39.12	3.76	42.88	54.00	-11.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

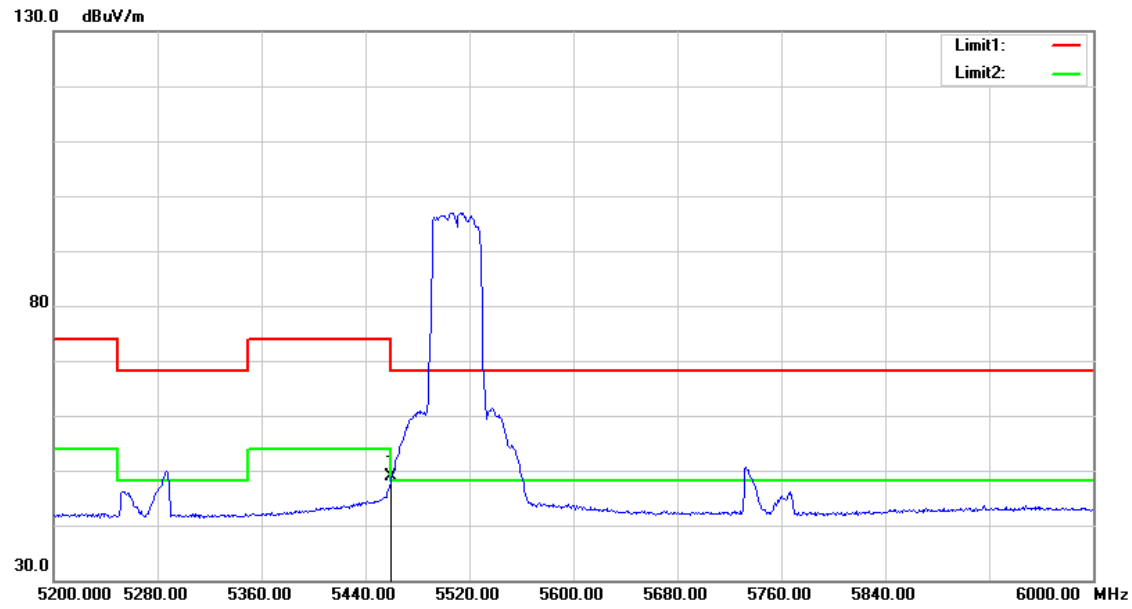


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	45.01	3.76	48.77	54.00	-5.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

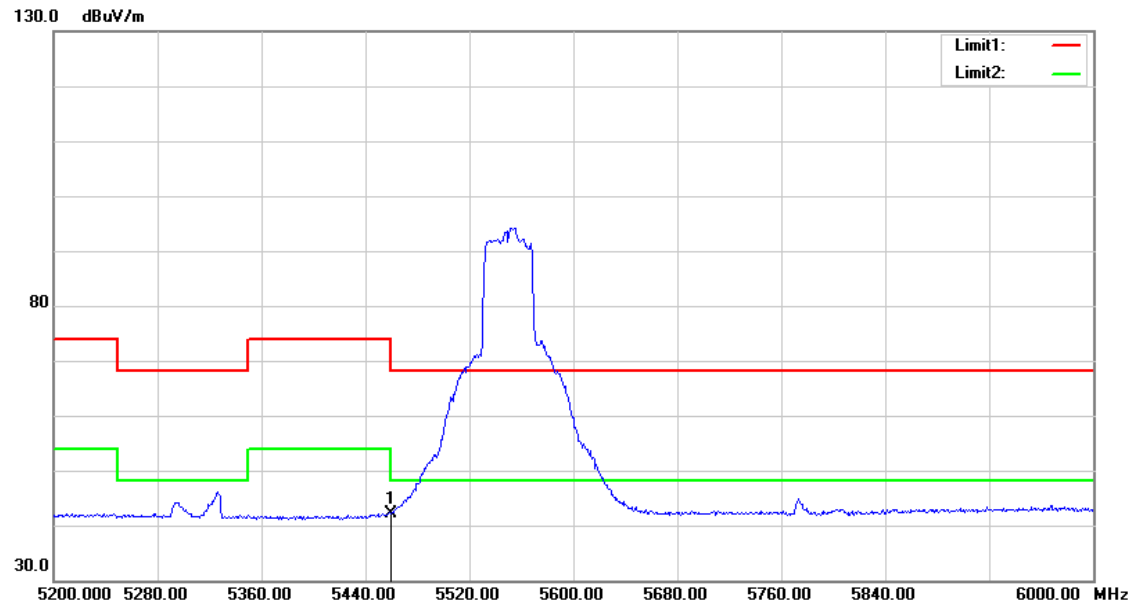


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.46	3.76	42.22	54.00	-11.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

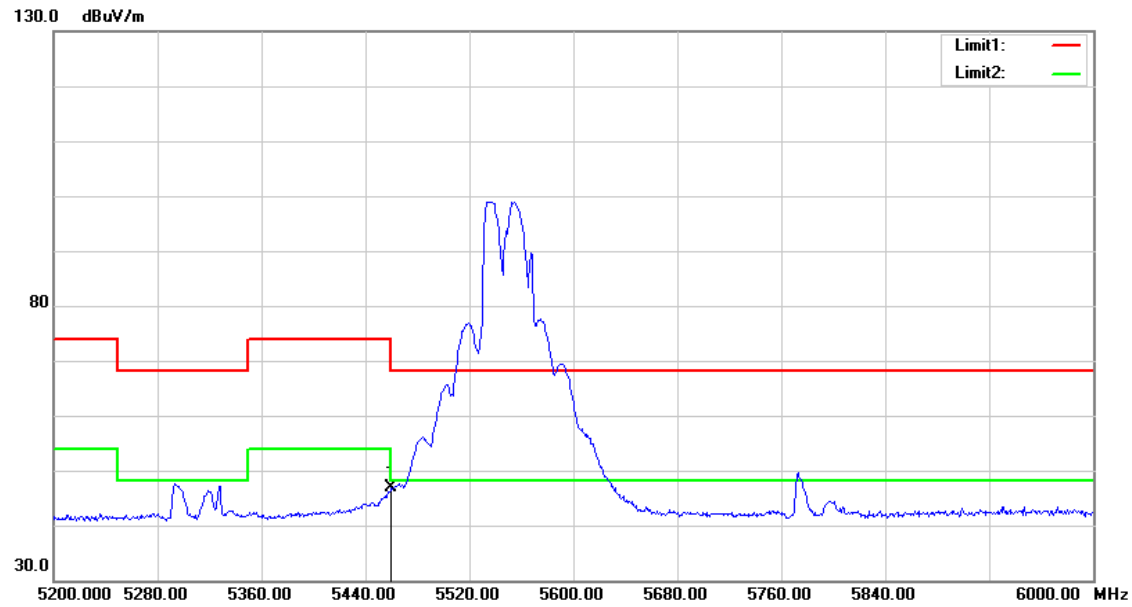


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	43.04	3.76	46.80	54.00	-7.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

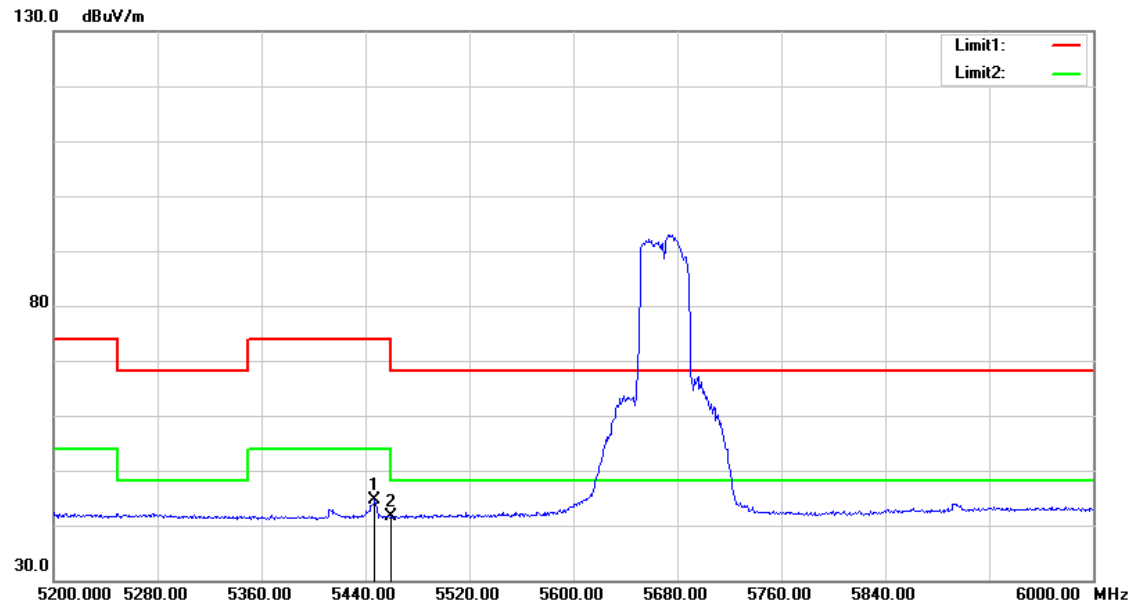


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	40.99	3.74	44.73	54.00	-9.27	AVG
2	5460.000	37.96	3.76	41.72	54.00	-12.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

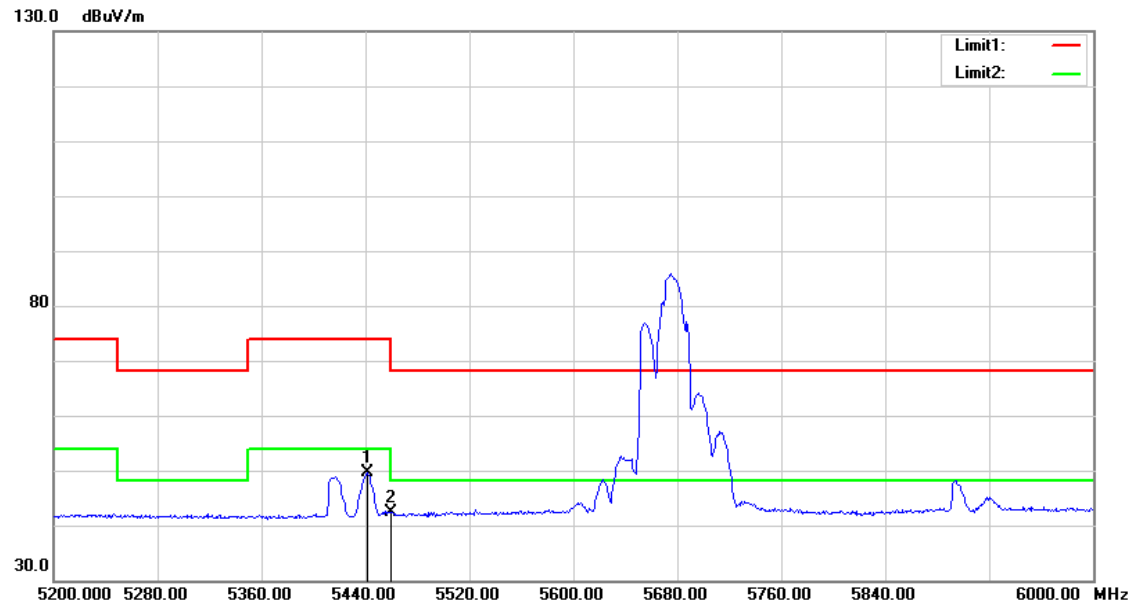


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.600	45.87	3.73	49.60	54.00	-4.40	AVG
2	5460.000	38.72	3.76	42.48	54.00	-11.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

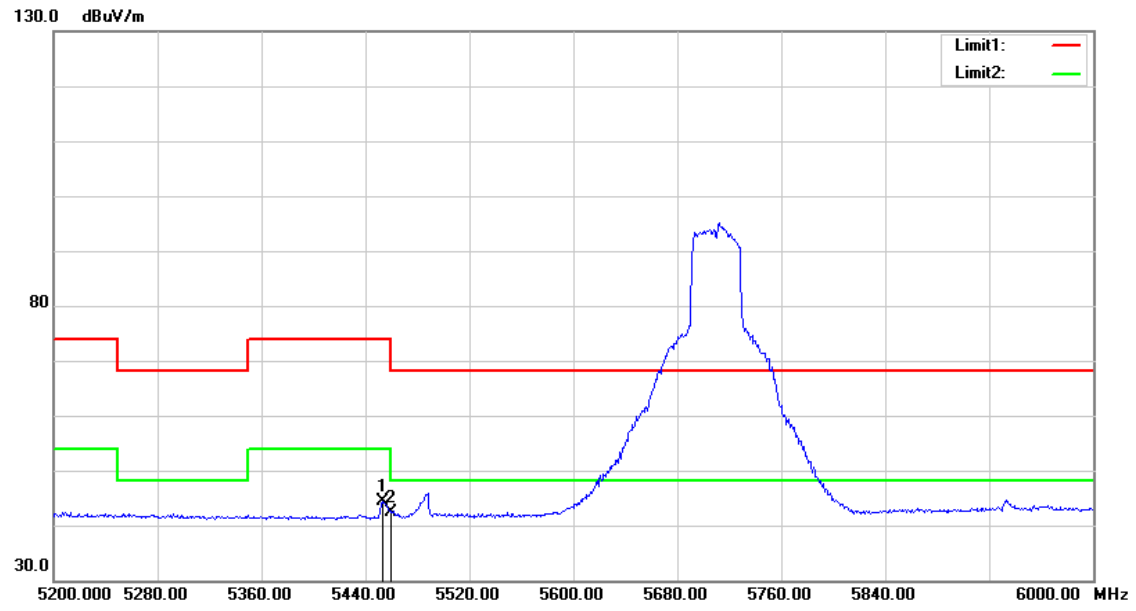


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	40.59	3.75	44.34	54.00	-9.66	AVG
2	5460.000	38.60	3.76	42.36	54.00	-11.64	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

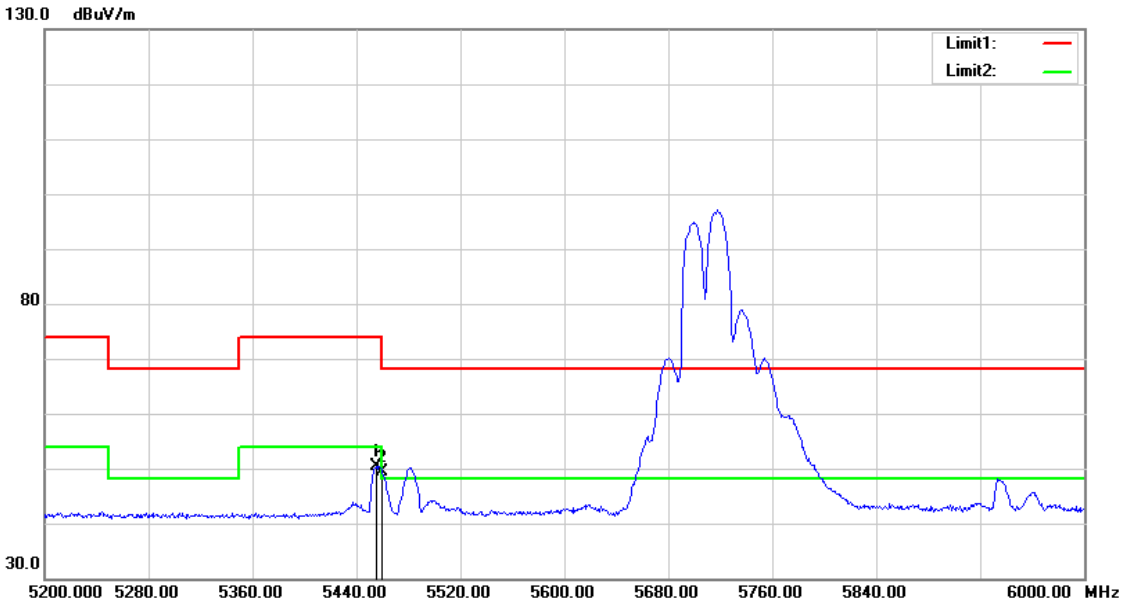


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.200	46.60	3.75	50.35	54.00	-3.65	AVG
2	5460.000	45.64	3.76	49.40	54.00	-4.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

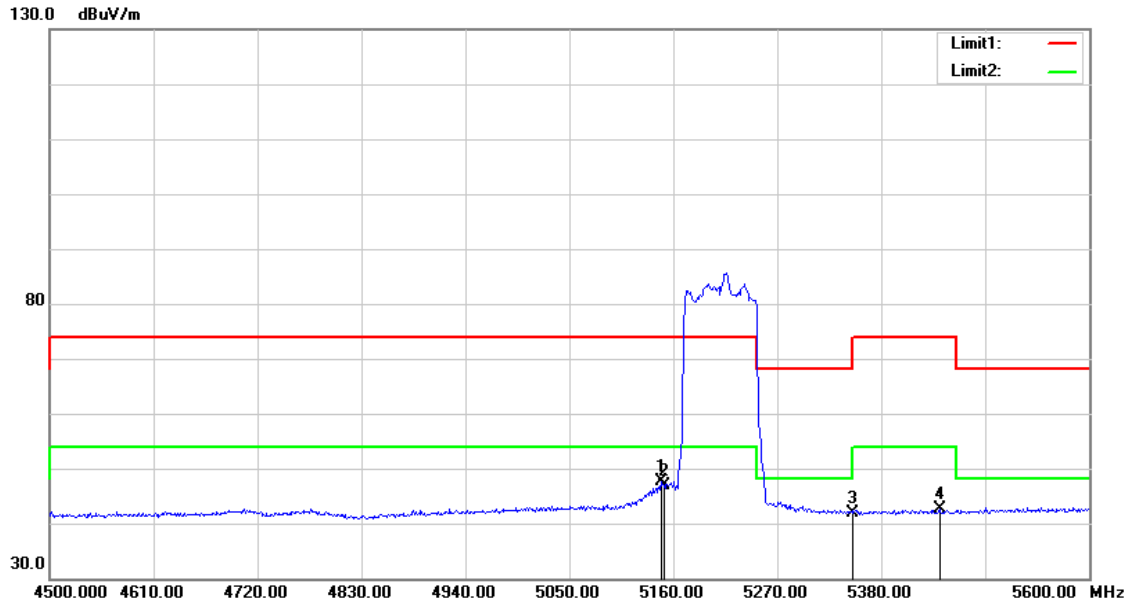


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	44.31	3.35	47.66	54.00	-6.34	AVG
2	5150.000	43.54	3.35	46.89	54.00	-7.11	AVG
3	5350.000	38.35	3.62	41.97	54.00	-12.03	AVG
4	5441.600	38.97	3.73	42.70	54.00	-11.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

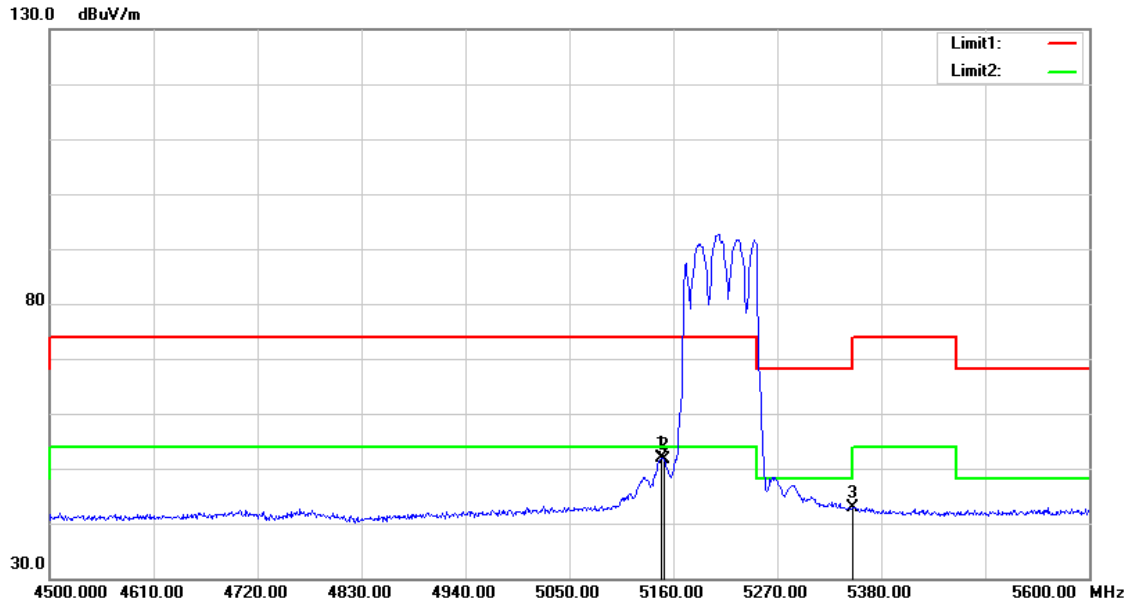


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	48.58	3.35	51.93	54.00	-2.07	AVG
2	5150.000	48.26	3.35	51.61	54.00	-2.39	AVG
3	5350.000	39.24	3.62	42.86	54.00	-11.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

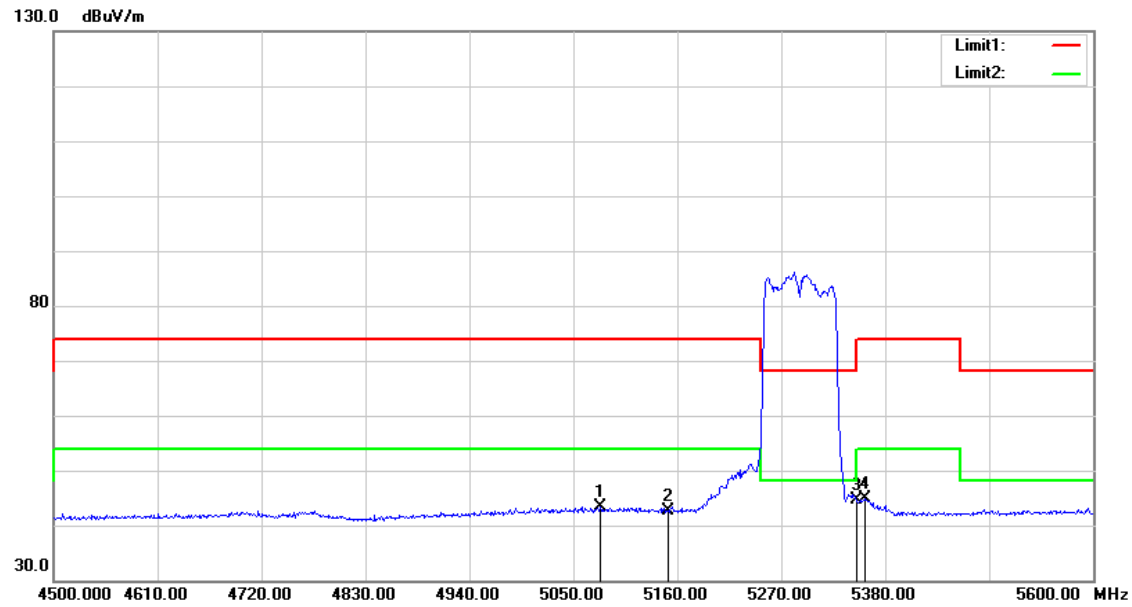


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.600	40.13	3.25	43.38	54.00	-10.62	AVG
2	5150.000	39.30	3.35	42.65	54.00	-11.35	AVG
3	5350.000	41.02	3.62	44.64	54.00	-9.36	AVG
4	5359.100	41.20	3.63	44.83	54.00	-9.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

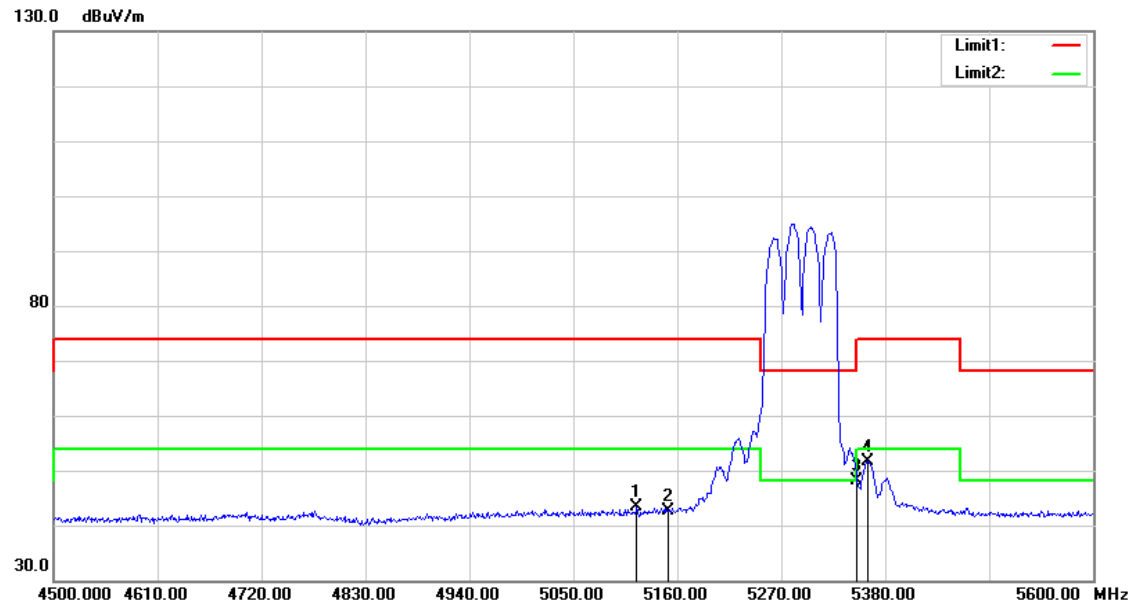


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5117.100	39.95	3.31	43.26	54.00	-10.74	AVG
2	5150.000	39.32	3.35	42.67	54.00	-11.33	AVG
3	5350.000	44.61	3.62	48.23	54.00	-5.77	AVG
4	5361.300	48.02	3.63	51.65	54.00	-2.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

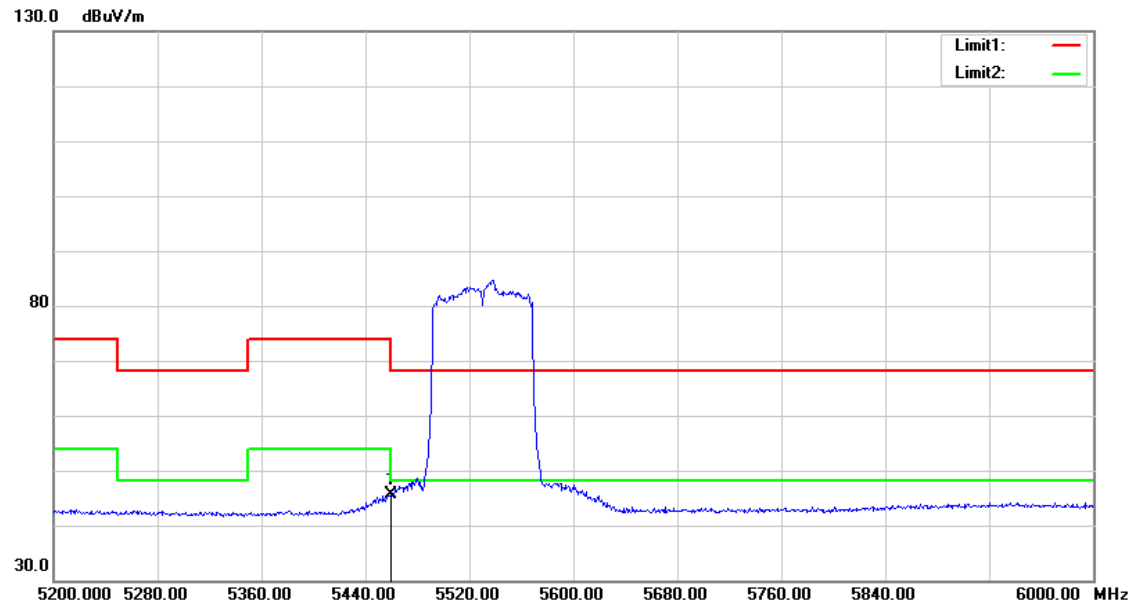


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	41.94	3.76	45.70	54.00	-8.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

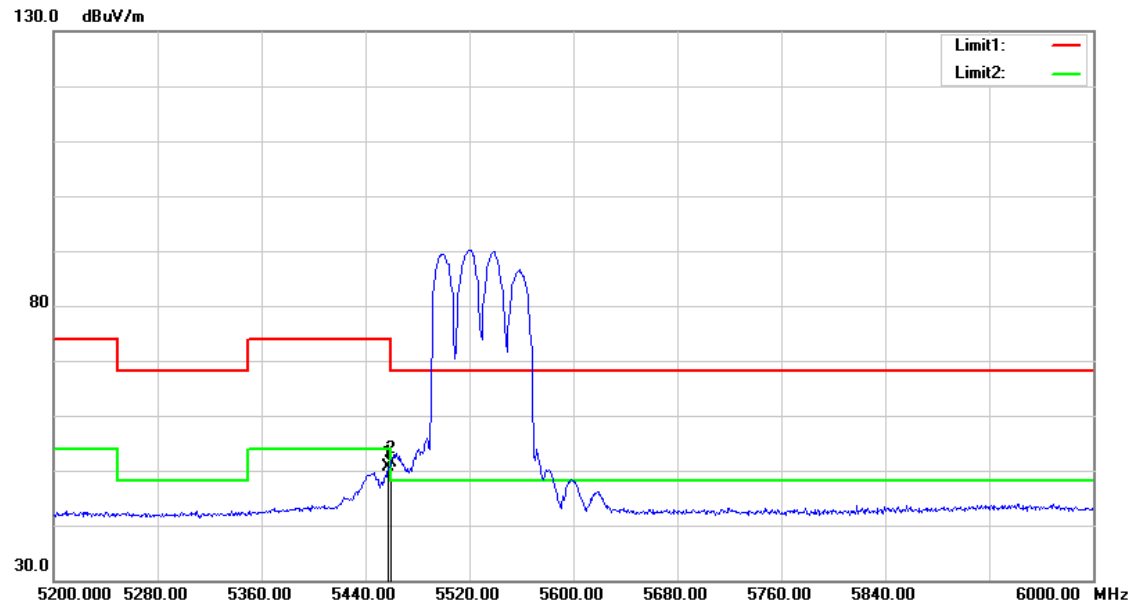


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.600	46.88	3.76	50.64	54.00	-3.36	AVG
2	5460.000	47.72	3.76	51.48	54.00	-2.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

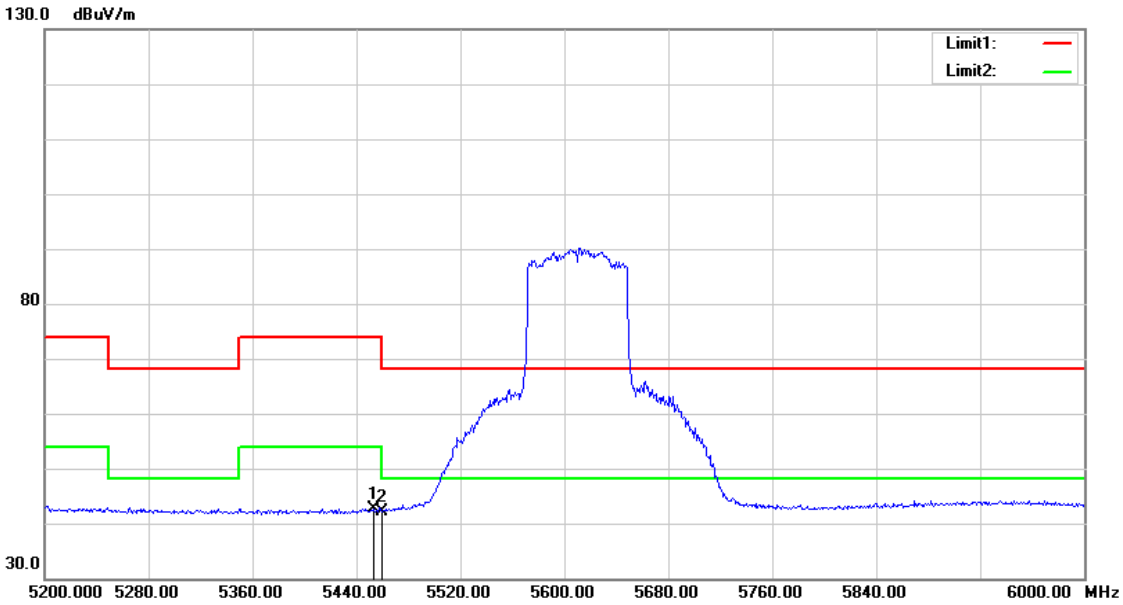


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.600	38.98	3.75	42.73	54.00	-11.27	AVG
2	5460.000	38.33	3.76	42.09	54.00	-11.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

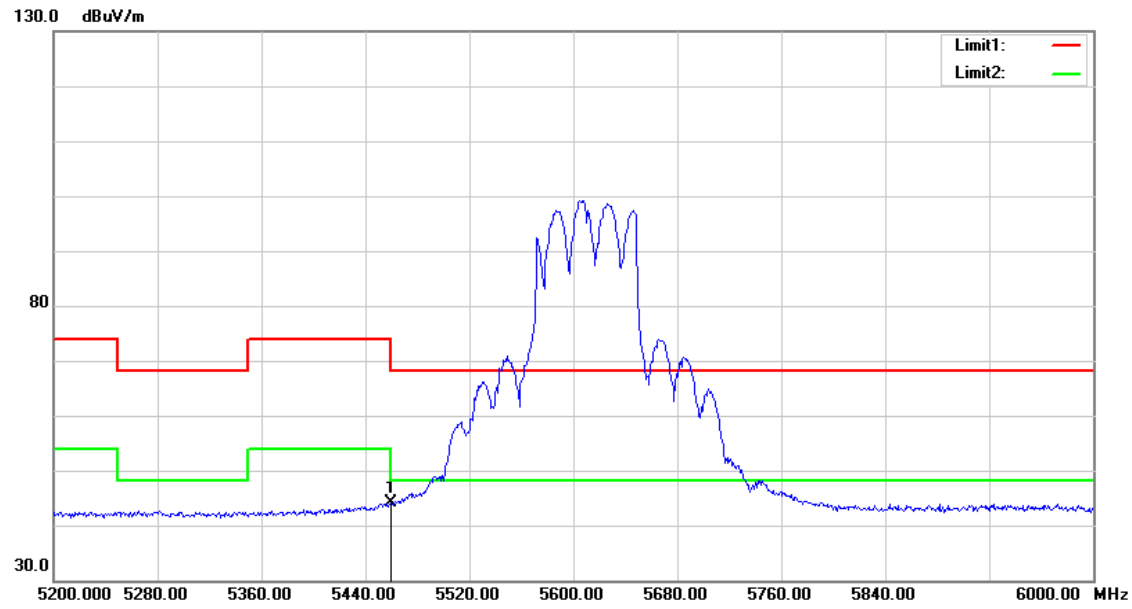


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	40.37	3.76	44.13	54.00	-9.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

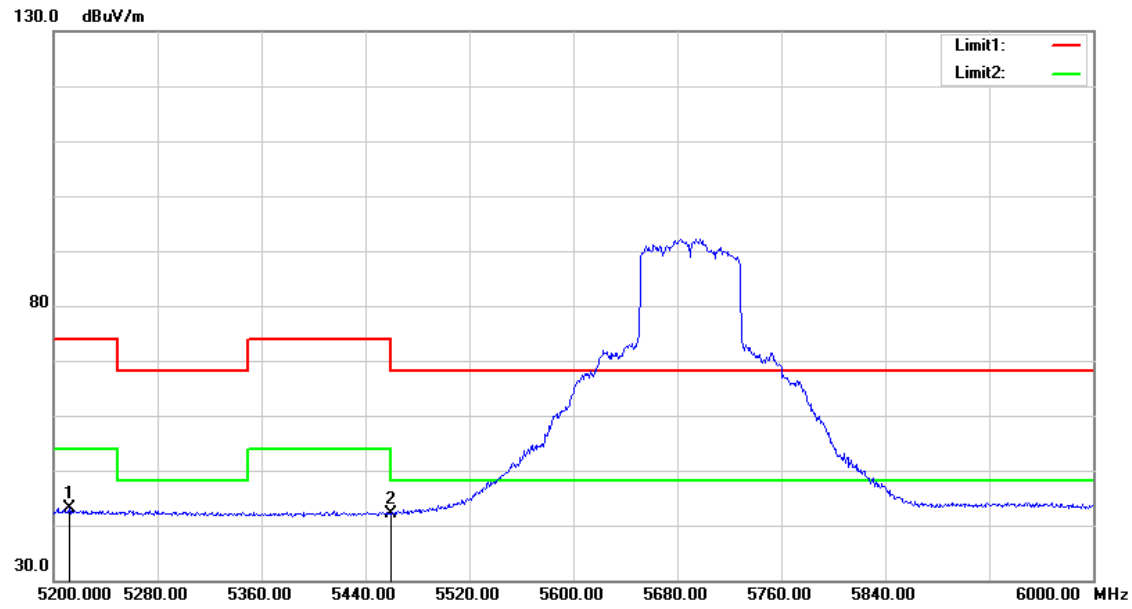


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	39.66	3.43	43.09	54.00	-10.91	AVG
2	5460.000	38.48	3.76	42.24	54.00	-11.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

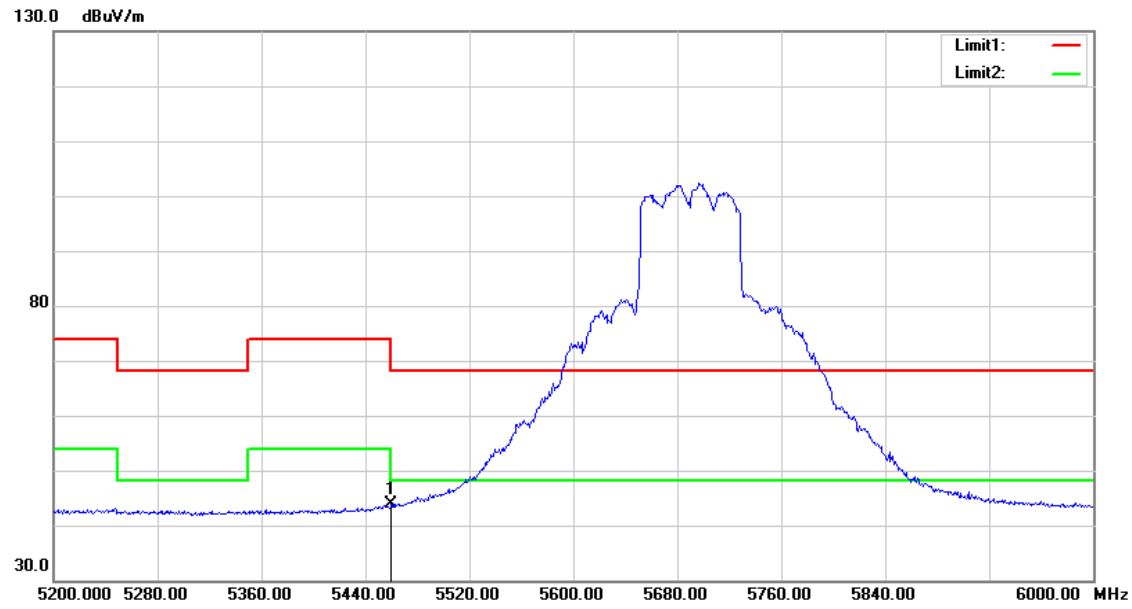

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	40.10	3.76	43.86	54.00	-10.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

PIFA Antenna

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

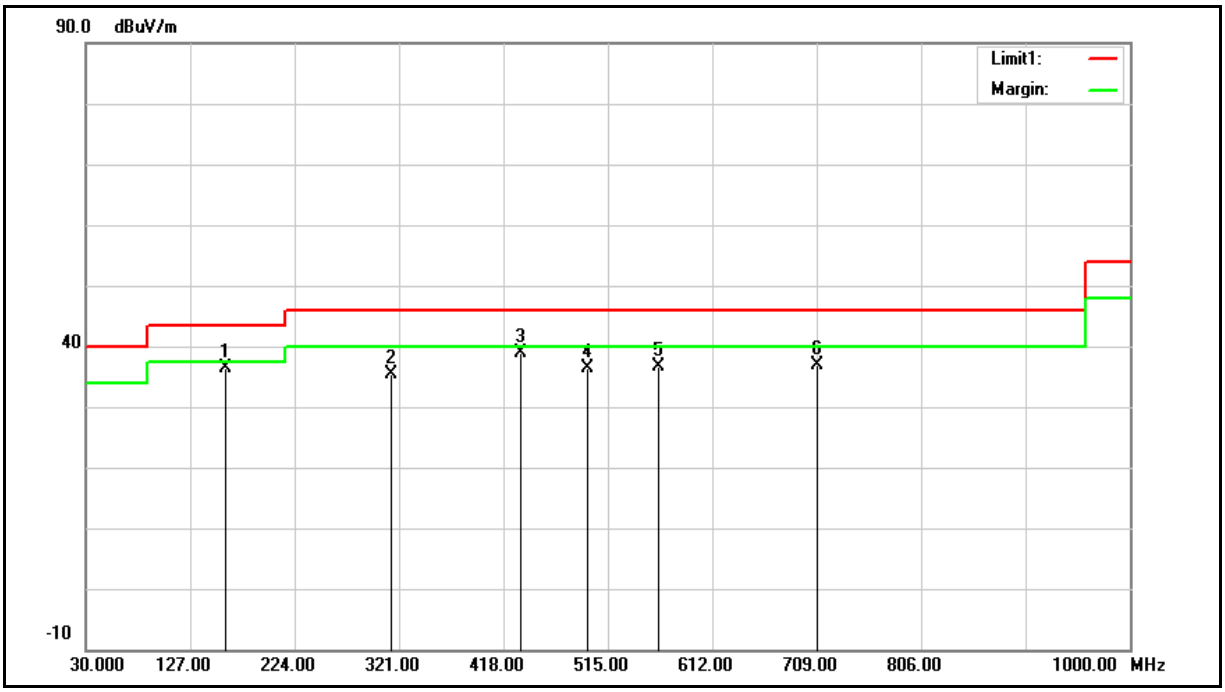

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	43.35	-7.00	36.35	43.50	-7.15	QP
2	314.2100	40.98	-5.59	35.39	46.00	-10.61	QP
3	434.4900	42.29	-3.35	38.94	46.00	-7.06	QP
4	495.6000	39.03	-2.66	36.37	46.00	-9.63	QP
5	562.5300	37.80	-1.22	36.58	46.00	-9.42	QP
6	709.0000	35.76	1.03	36.79	46.00	-9.21	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 36.35 = -7.00 + 43.35

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

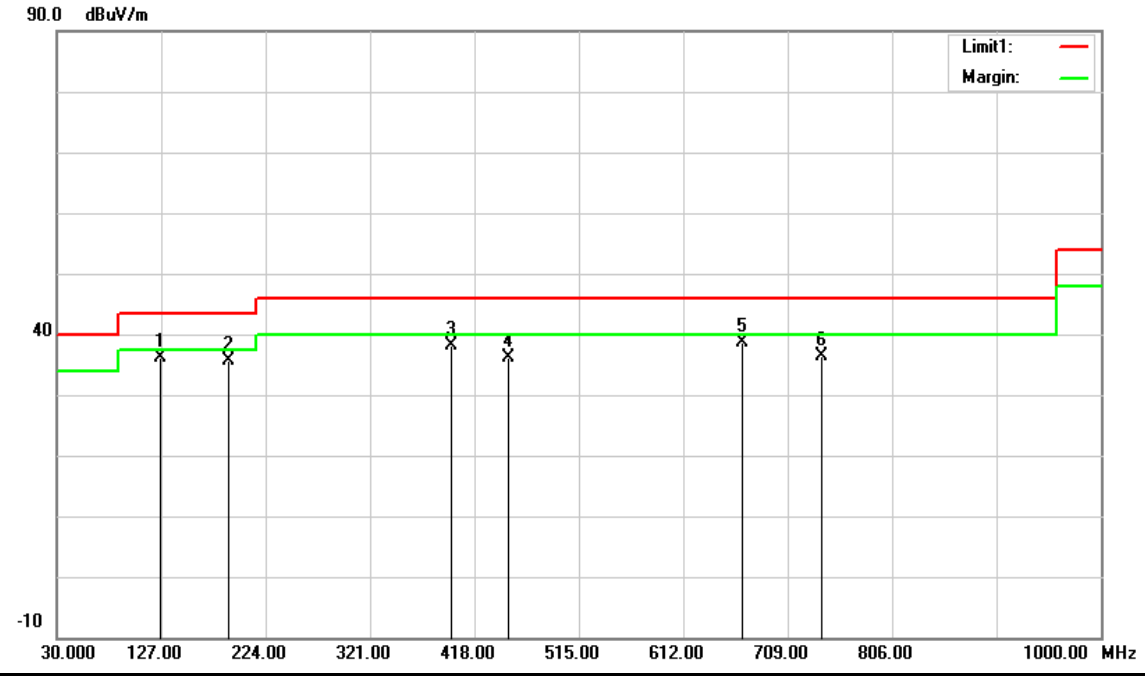

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	126.0300	45.31	-9.20	36.11	43.50	-7.39	QP
2	190.0500	44.56	-9.01	35.55	43.50	-7.95	QP
3	396.6600	42.16	-3.97	38.19	46.00	-7.81	QP
4	450.0100	39.23	-3.10	36.13	46.00	-9.87	QP
5	666.3200	38.16	0.42	38.58	46.00	-7.42	QP
6	740.0400	34.79	1.49	36.28	46.00	-9.72	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.11 = -9.20 + 45.31

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

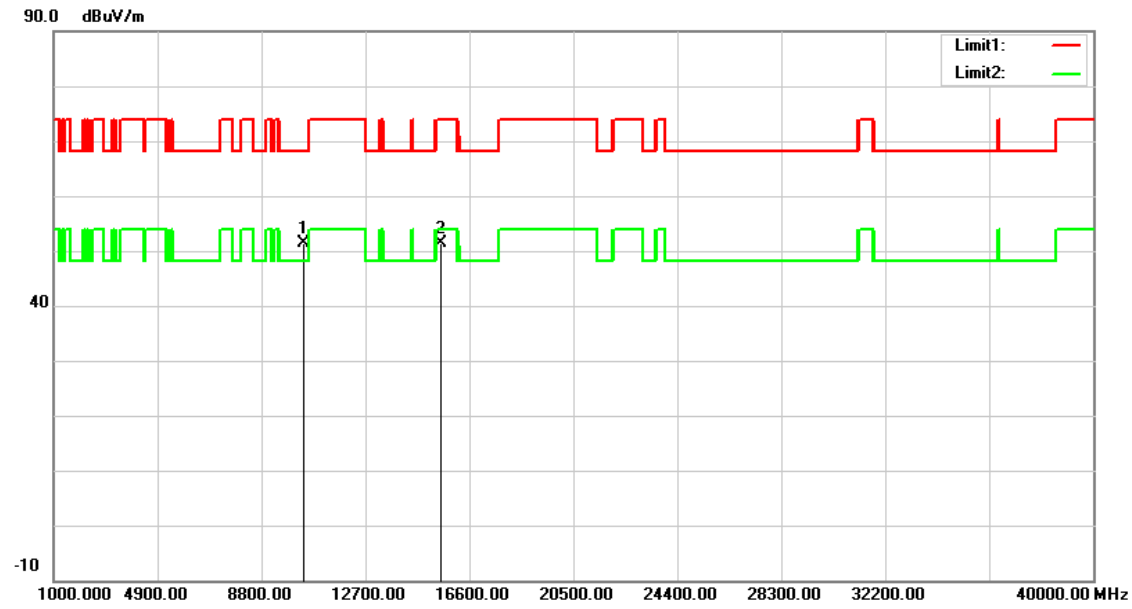

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	38.01	13.47	51.48	68.20	-16.72	peak
2	15540.000	35.64	15.74	51.38	74.00	-22.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 51.48 = 13.47 + 38.01

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

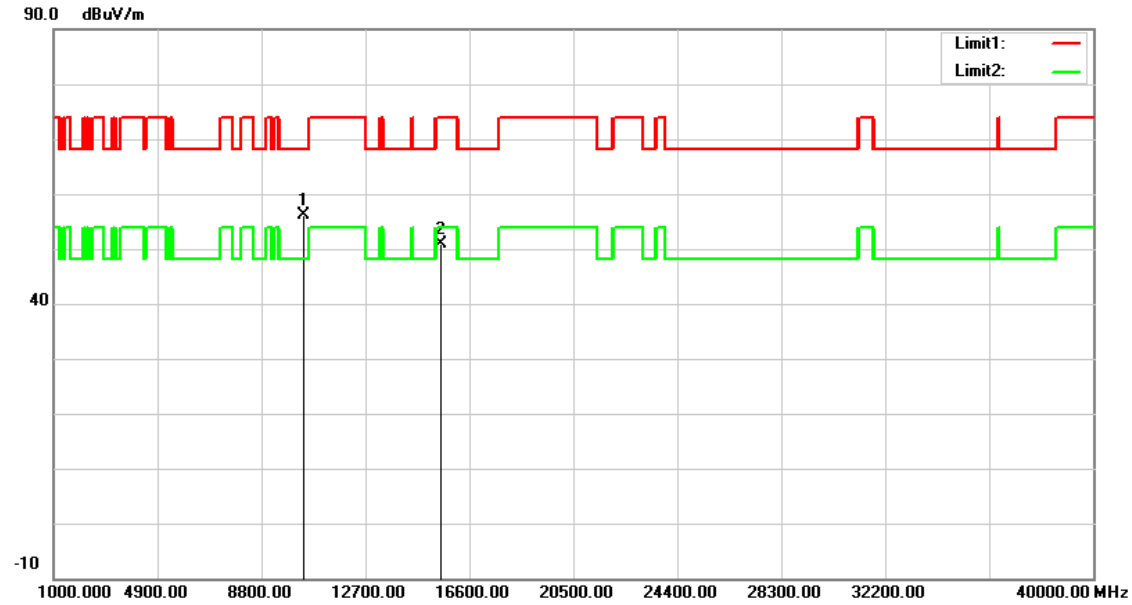

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	42.54	13.47	56.01	68.20	-12.19	peak
2	15540.000	35.26	15.74	51.00	74.00	-23.00	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 56.01 = 13.47 + 42.54

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

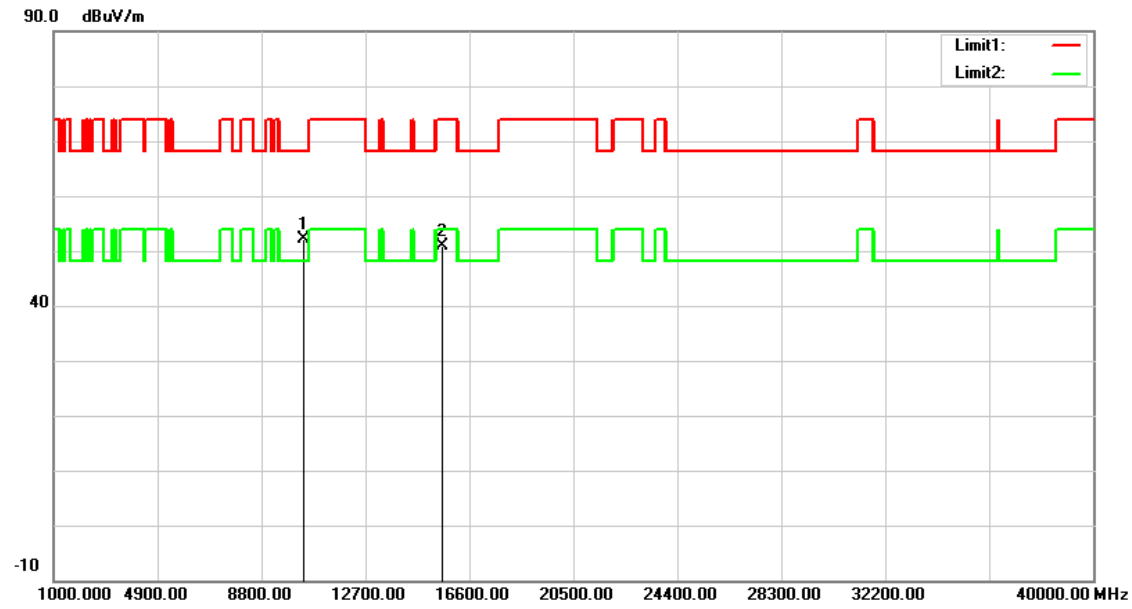


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	38.59	13.61	52.20	68.20	-16.00	peak
2	15600.000	35.29	15.59	50.88	74.00	-23.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

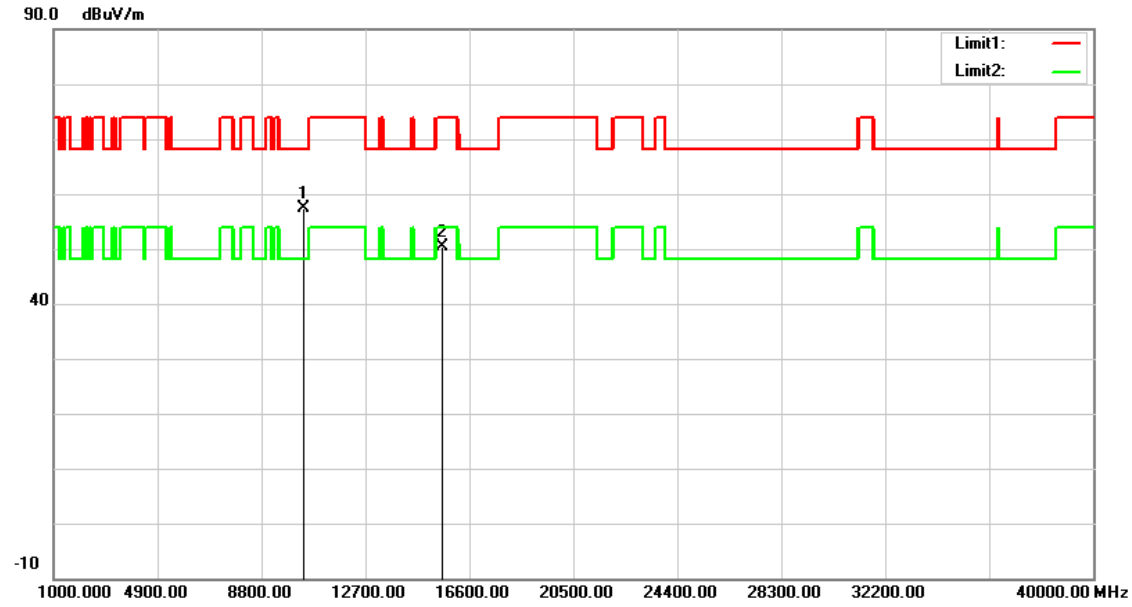


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	43.74	13.61	57.35	68.20	-10.85	peak
2	15600.000	34.87	15.59	50.46	74.00	-23.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

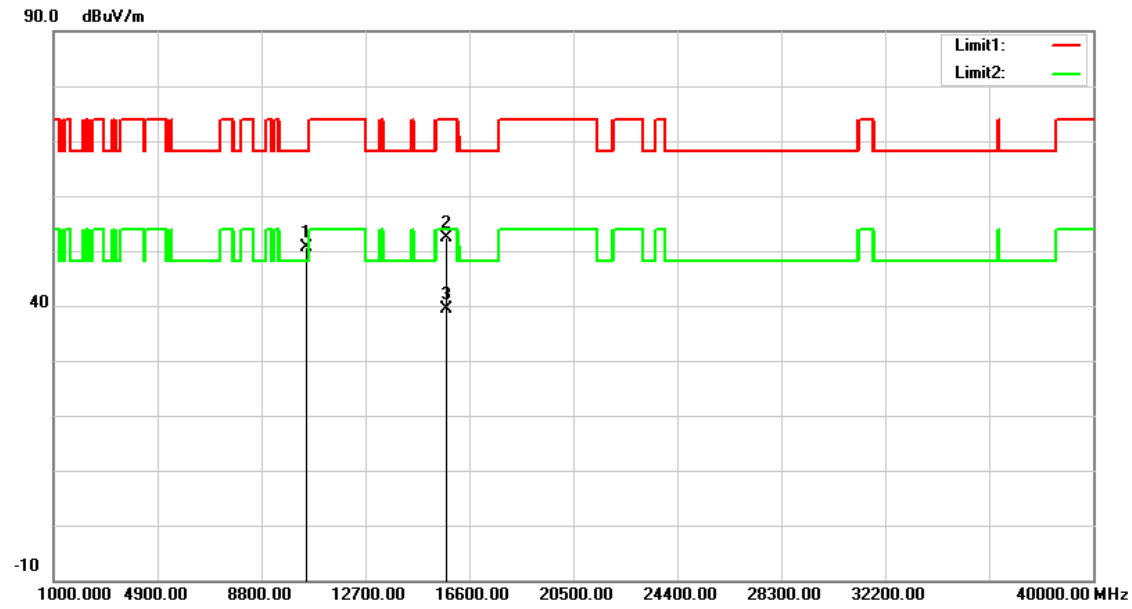


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.79	13.90	50.69	68.20	-17.51	peak
2	15720.000	37.01	15.30	52.31	74.00	-21.69	peak
3	15720.000	24.01	15.30	39.31	54.00	-14.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

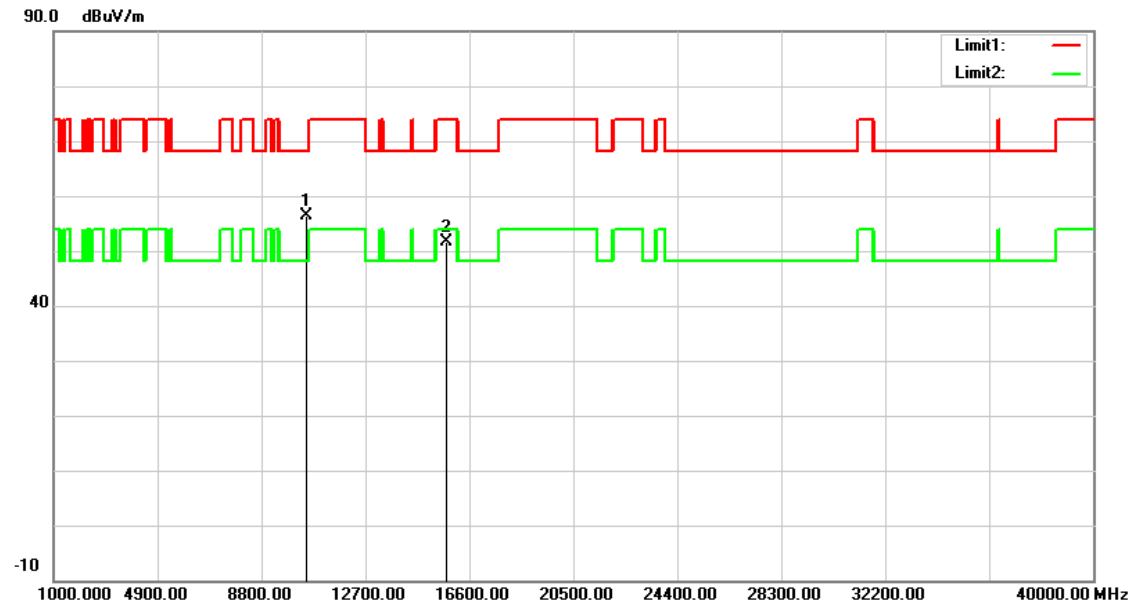


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	42.39	13.90	56.29	68.20	-11.91	peak
2	15720.000	36.41	15.30	51.71	74.00	-22.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

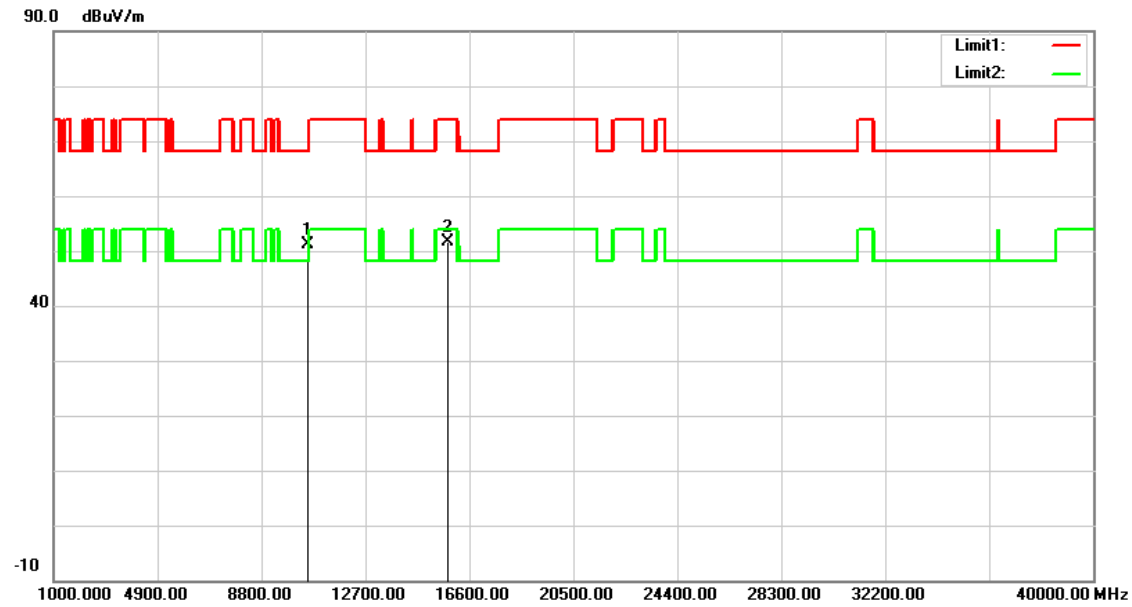


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	37.08	13.99	51.07	68.20	-17.13	peak
2	15780.000	36.50	15.18	51.68	74.00	-22.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

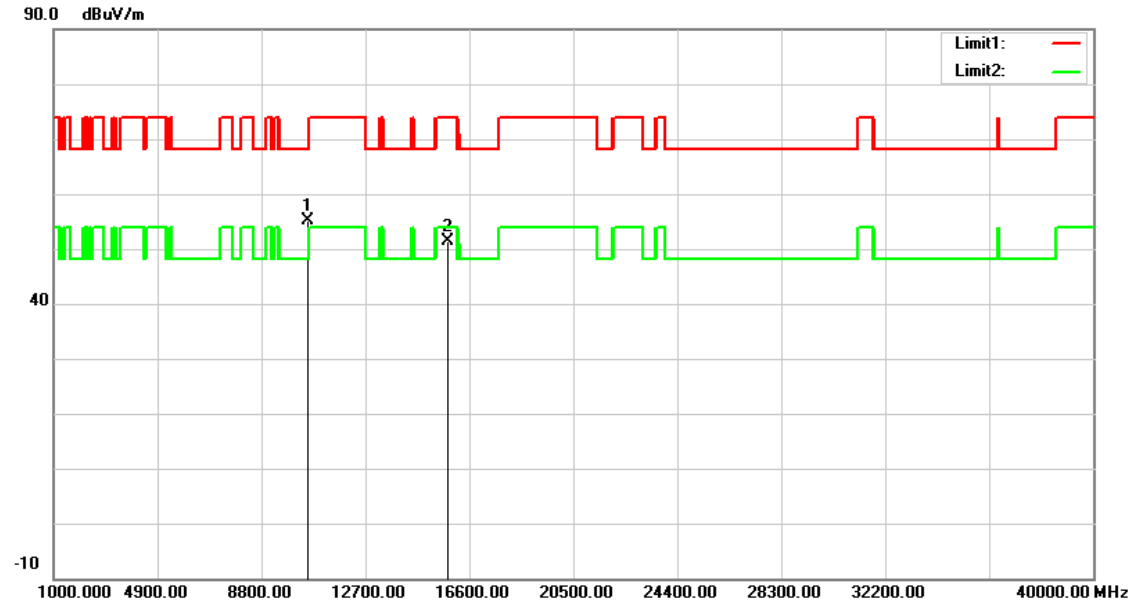


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	41.18	13.99	55.17	68.20	-13.03	peak
2	15780.000	36.32	15.18	51.50	74.00	-22.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

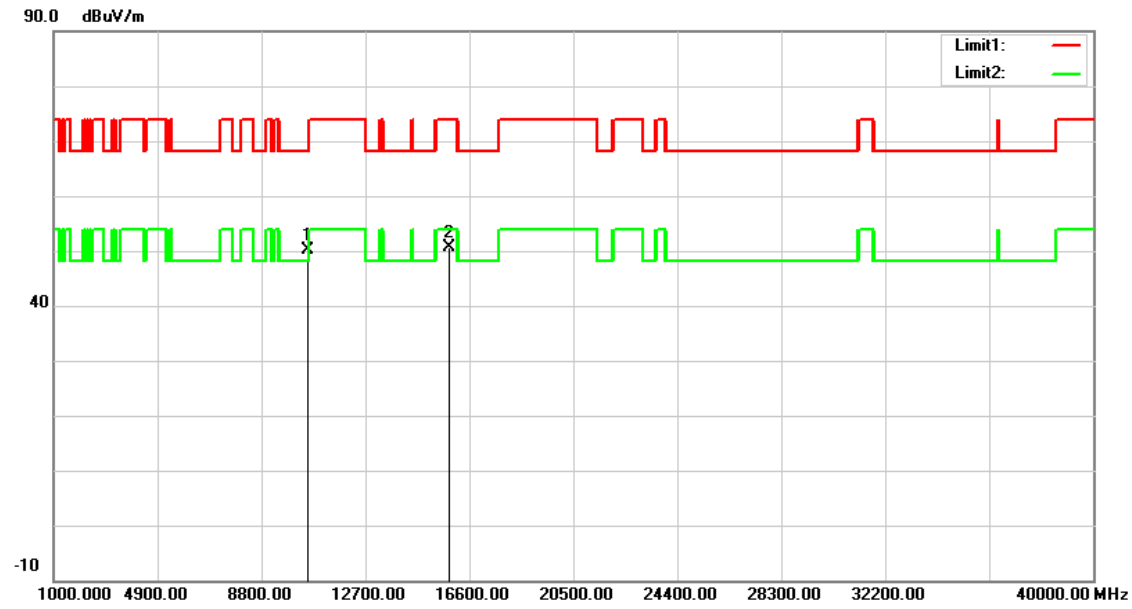


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.17	14.03	50.20	68.20	-18.00	peak
2	15840.000	35.64	15.04	50.68	74.00	-23.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

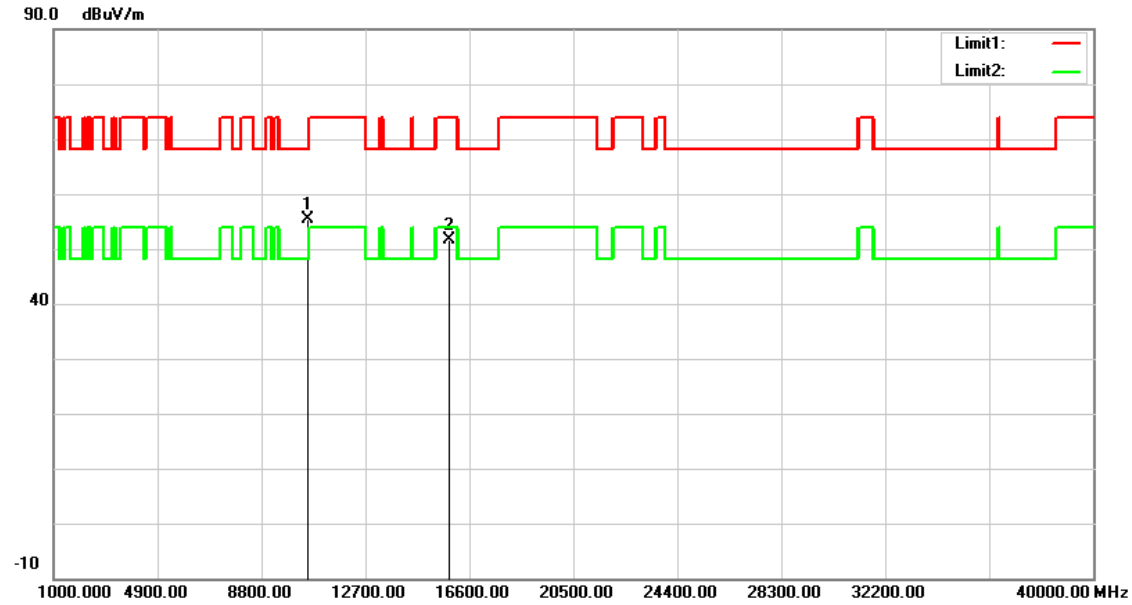


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	41.47	14.03	55.50	68.20	-12.70	peak
2	15840.000	36.57	15.04	51.61	74.00	-22.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

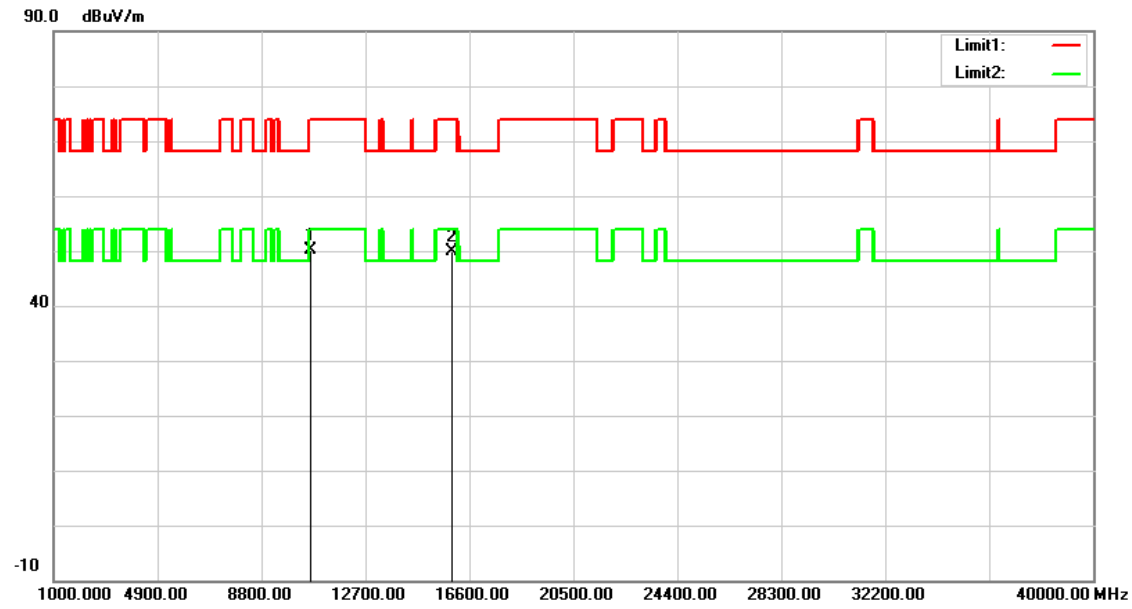


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.91	14.12	50.03	74.00	-23.97	peak
2	15960.000	35.14	14.75	49.89	74.00	-24.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

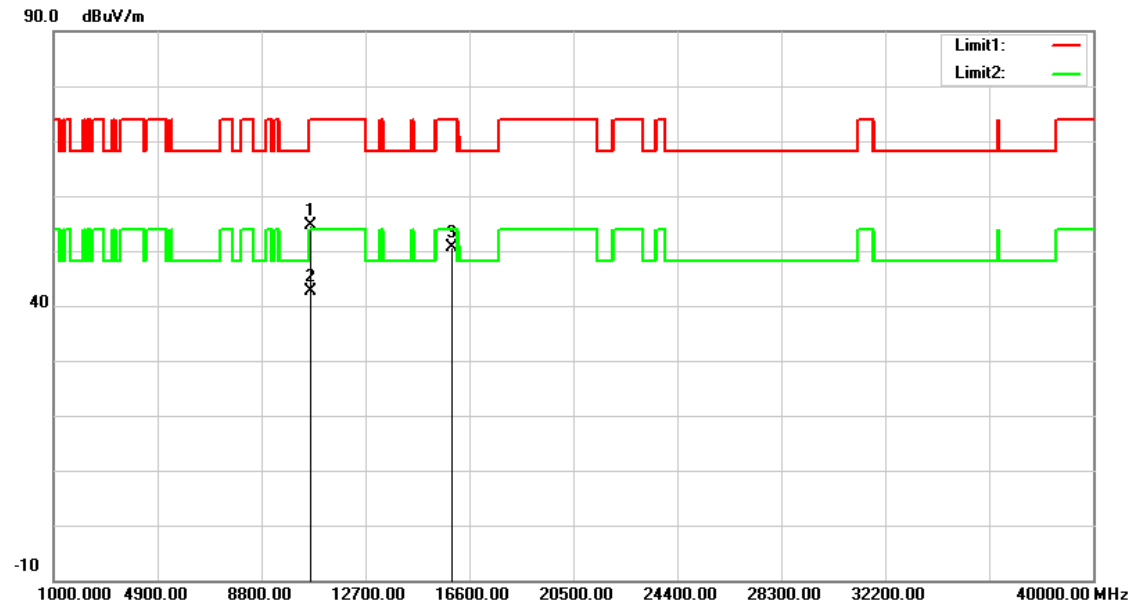


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	40.48	14.12	54.60	74.00	-19.40	peak
2	10640.000	28.46	14.12	42.58	54.00	-11.42	AVG
3	15960.000	35.94	14.75	50.69	74.00	-23.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

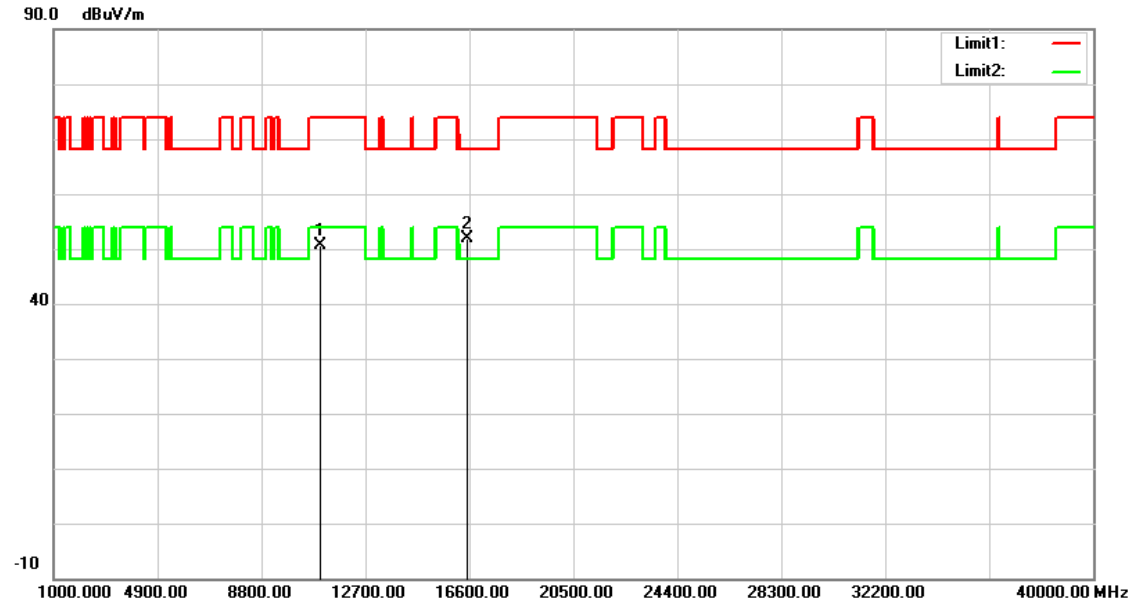


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.19	14.53	50.72	74.00	-23.28	peak
2	16500.000	36.05	15.80	51.85	68.20	-16.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

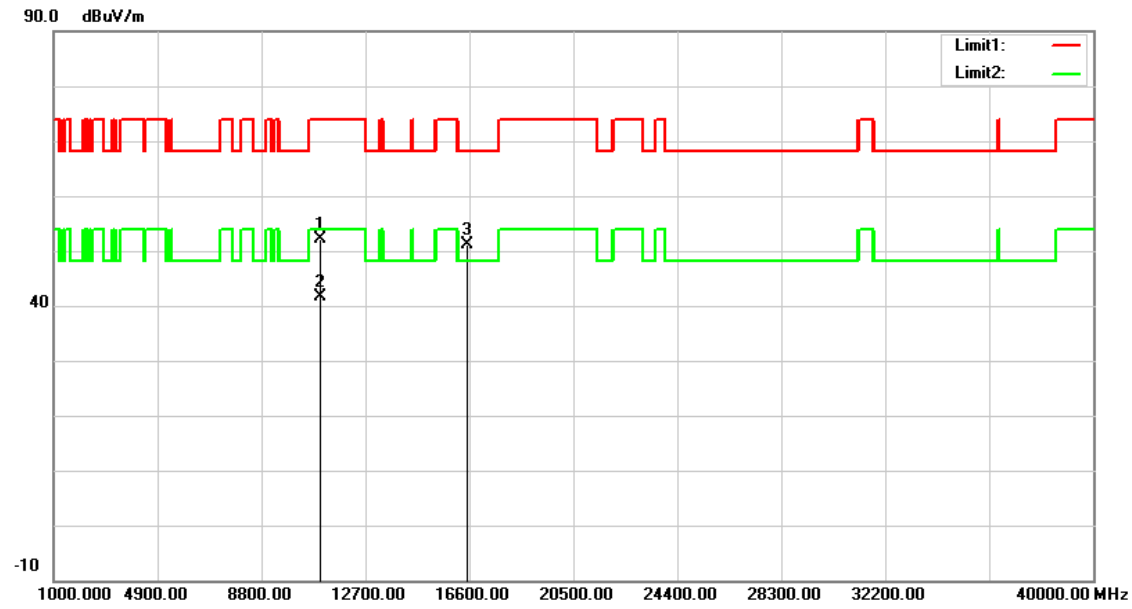


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	37.49	14.53	52.02	74.00	-21.98	peak
2	11000.000	27.06	14.53	41.59	54.00	-12.41	AVG
3	16500.000	35.41	15.80	51.21	68.20	-16.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

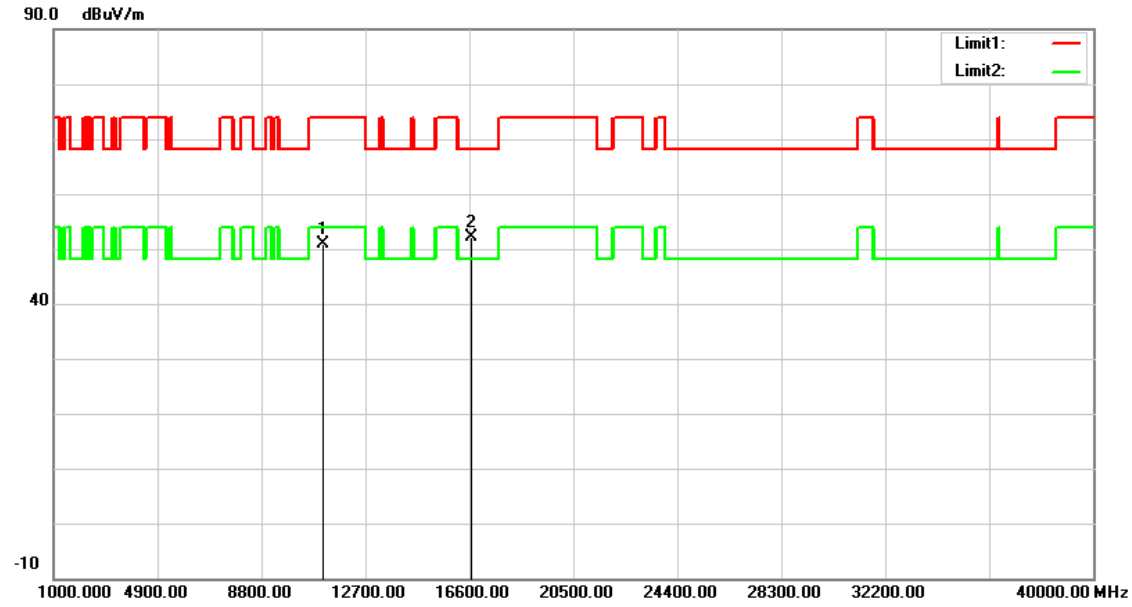


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.29	14.66	50.95	74.00	-23.05	peak
2	16680.000	35.41	16.79	52.20	68.20	-16.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

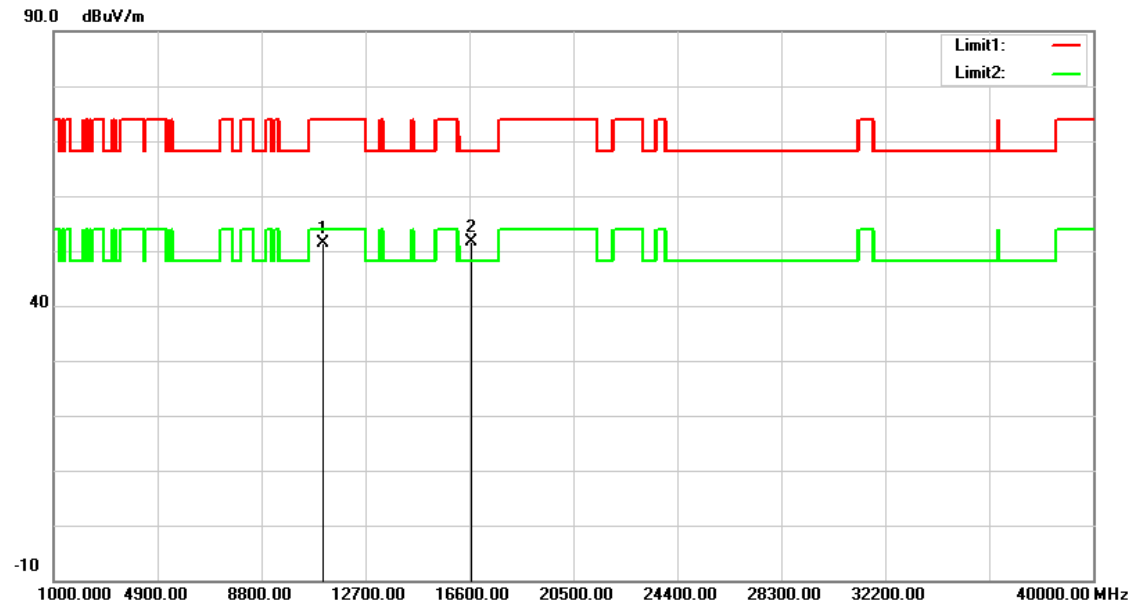


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.63	14.66	51.29	74.00	-22.71	peak
2	16680.000	34.95	16.79	51.74	68.20	-16.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

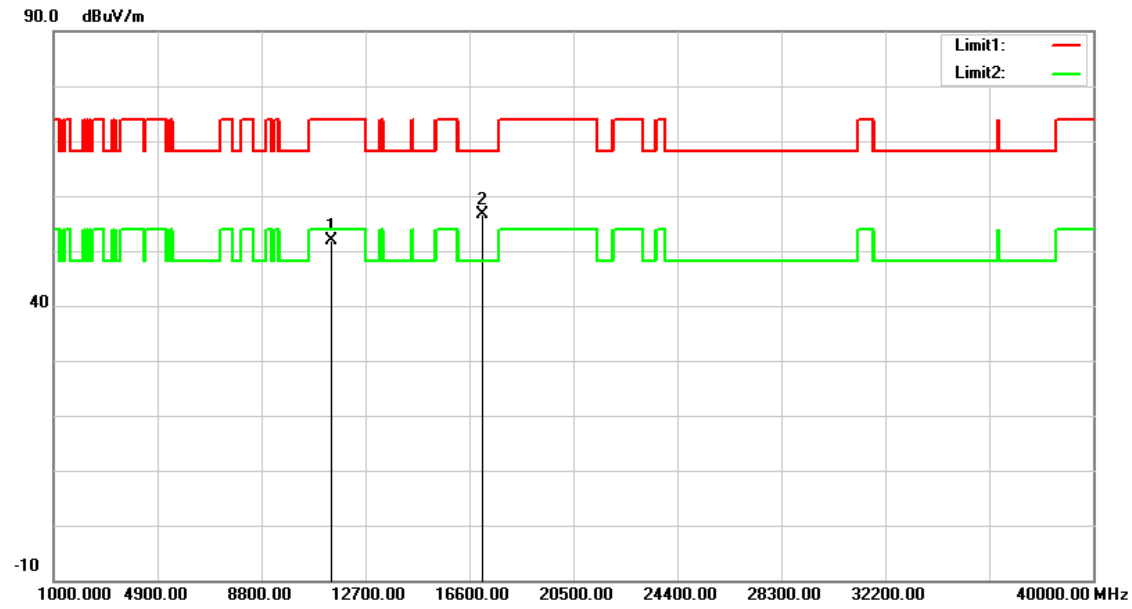


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.95	14.93	51.88	74.00	-22.12	peak
2	17100.000	37.51	19.06	56.57	68.20	-11.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

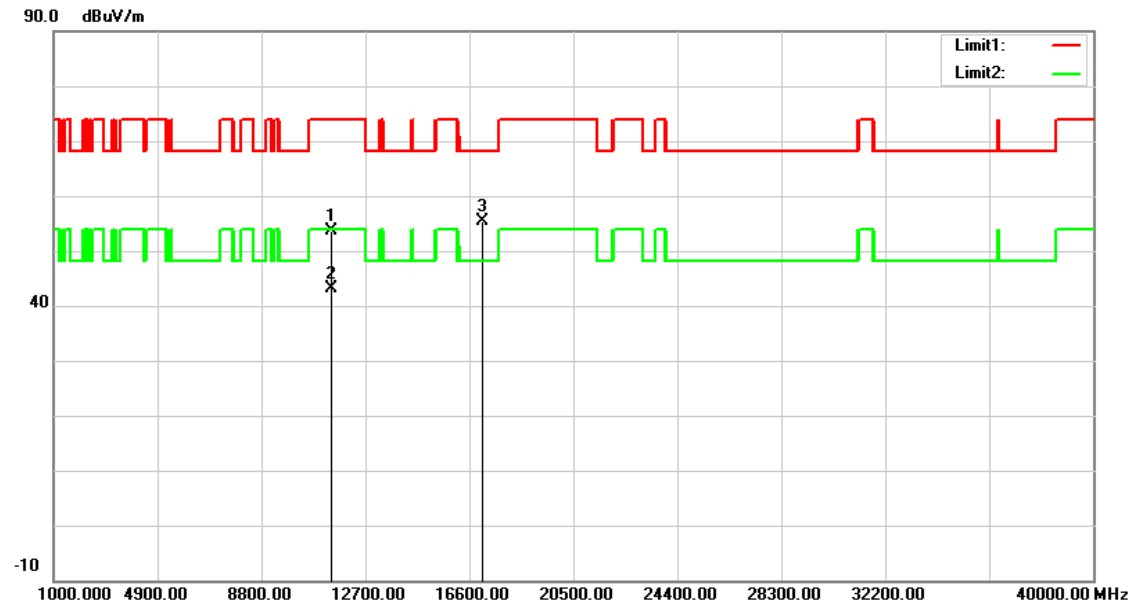


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	38.63	14.93	53.56	74.00	-20.44	peak
2	11400.000	28.13	14.93	43.06	54.00	-10.94	AVG
3	17100.000	36.39	19.06	55.45	68.20	-12.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

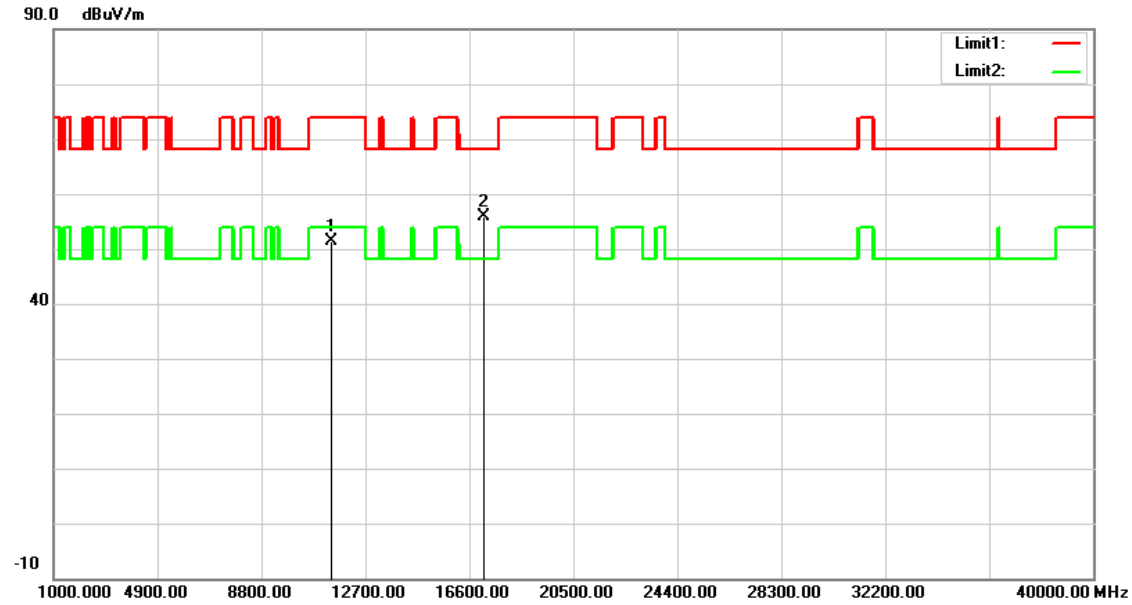


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	36.29	14.97	51.26	74.00	-22.74	peak
2	17160.000	36.62	19.36	55.98	68.20	-12.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

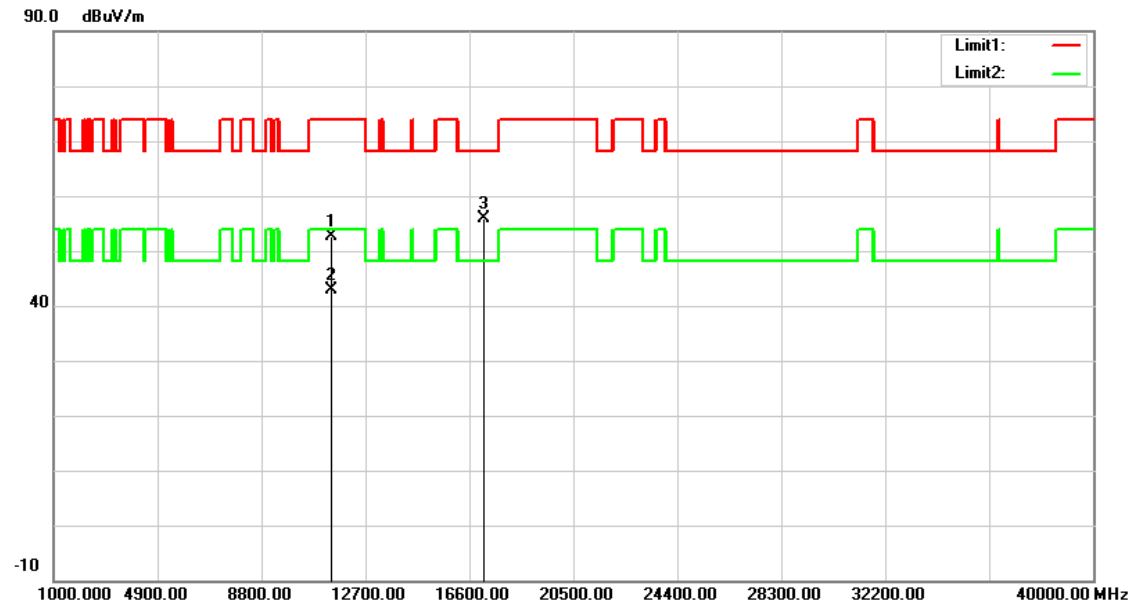


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	37.78	14.97	52.75	74.00	-21.25	peak
2	11440.000	27.94	14.97	42.91	54.00	-11.09	AVG
3	17160.000	36.43	19.36	55.79	68.20	-12.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

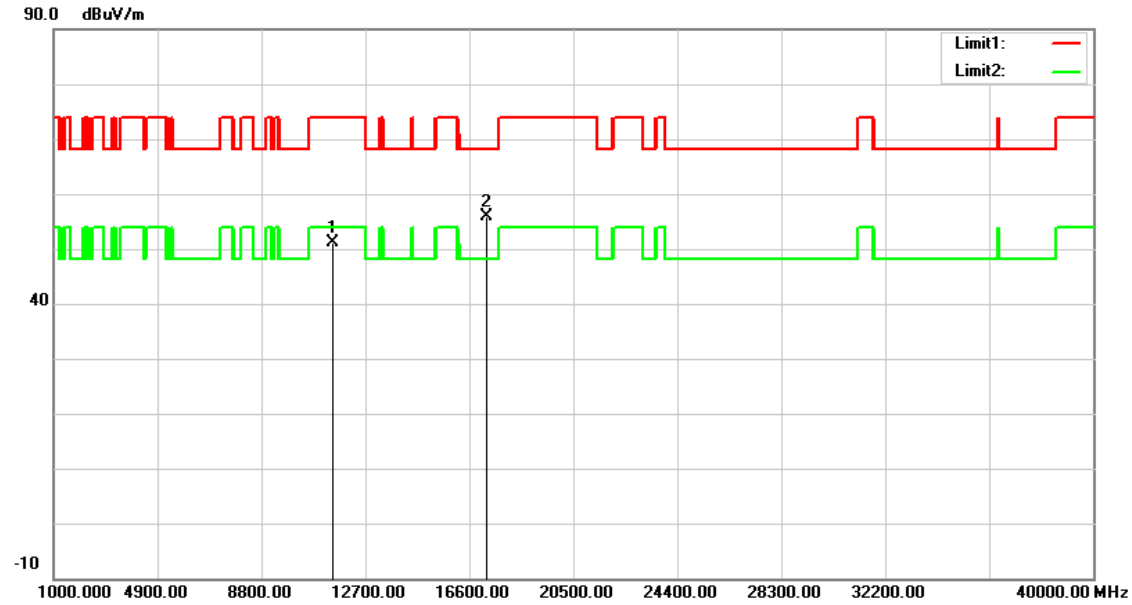


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.15	15.02	51.17	74.00	-22.83	peak
2	17235.000	36.07	19.74	55.81	68.20	-12.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

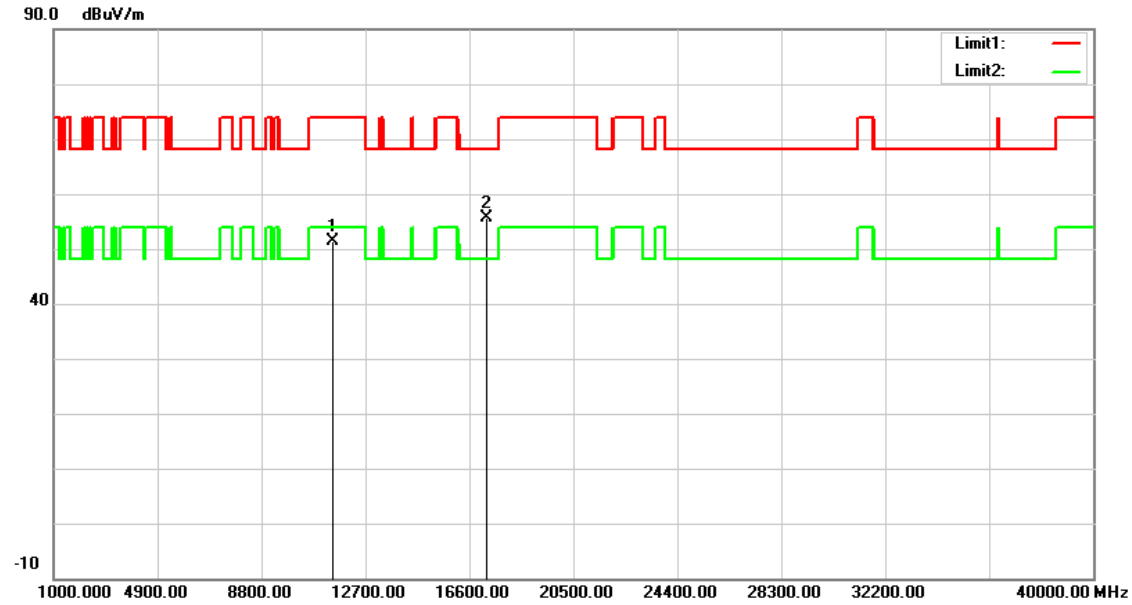


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.48	15.02	51.50	74.00	-22.50	peak
2	17235.000	35.85	19.74	55.59	68.20	-12.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

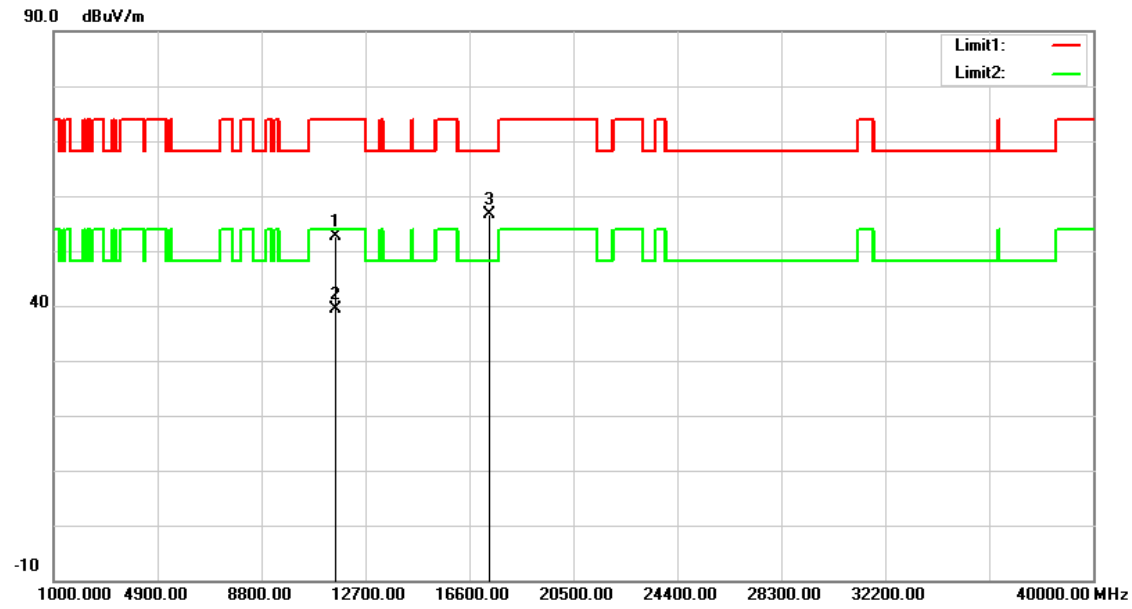


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	37.84	14.89	52.73	74.00	-21.27	peak
2	11570.000	24.48	14.89	39.37	54.00	-14.63	AVG
3	17355.000	36.28	20.34	56.62	68.20	-11.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

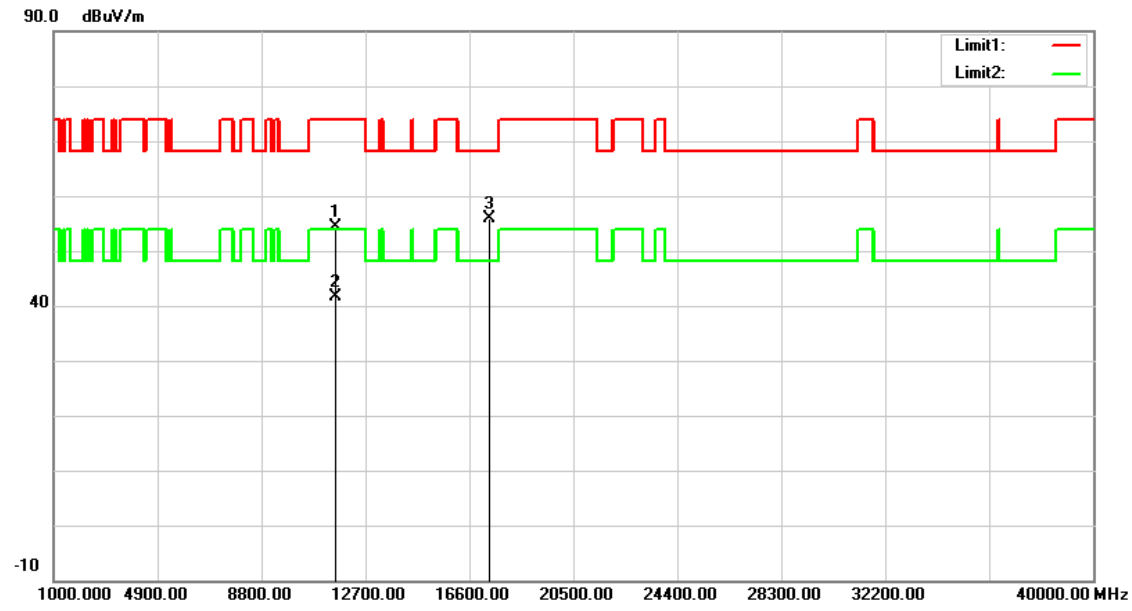


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	39.57	14.89	54.46	74.00	-19.54	peak
2	11570.000	26.78	14.89	41.67	54.00	-12.33	AVG
3	17355.000	35.62	20.34	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

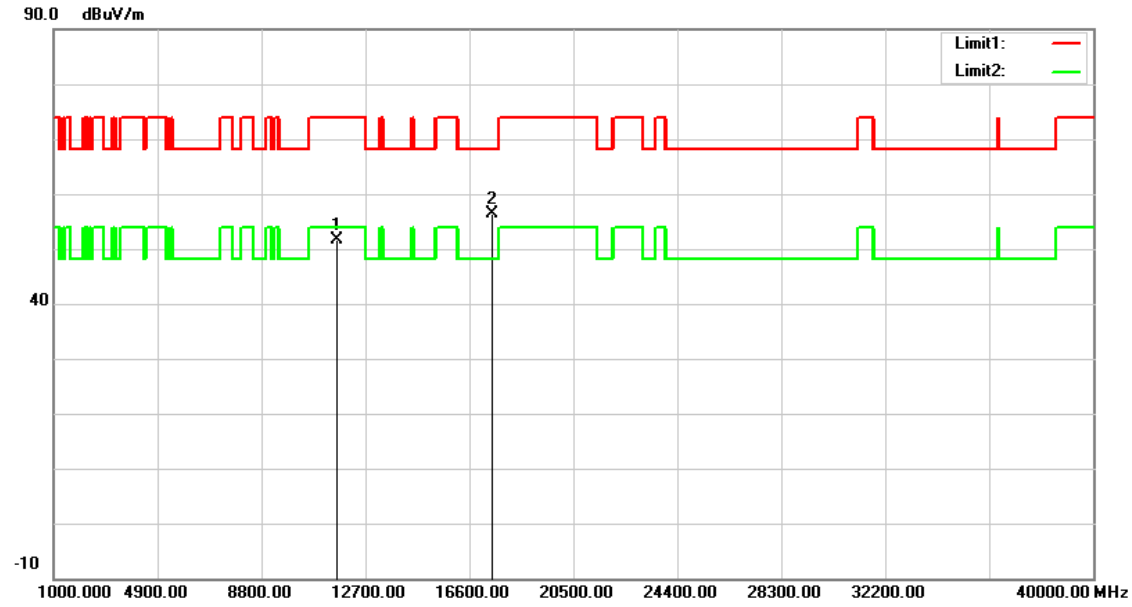


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.82	14.74	51.56	74.00	-22.44	peak
2	17475.000	35.43	20.95	56.38	68.20	-11.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

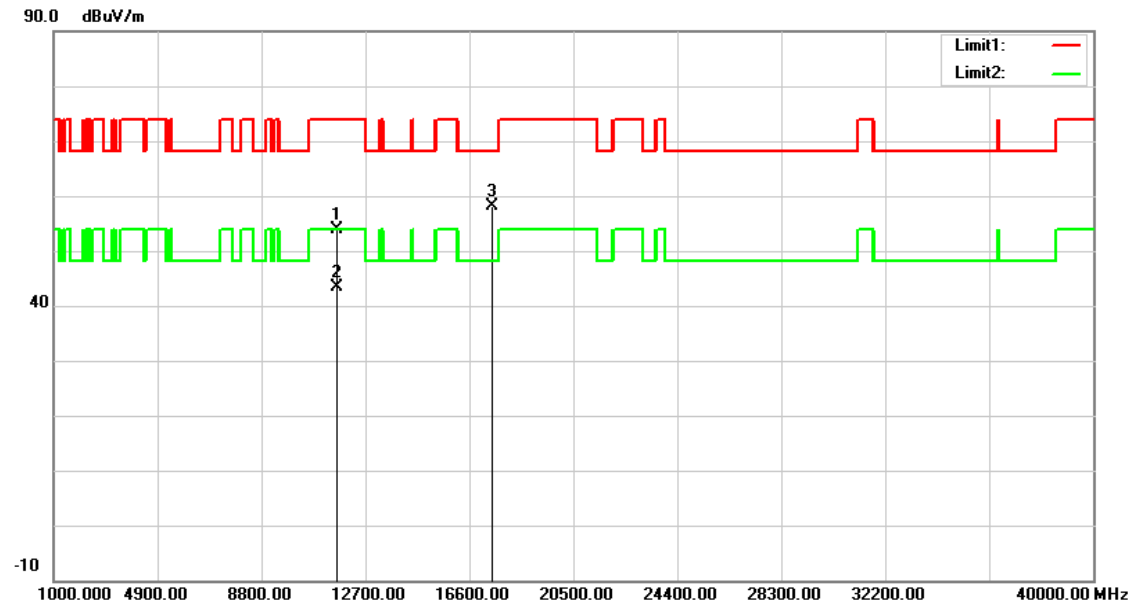


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	39.13	14.74	53.87	74.00	-20.13	peak
2	11650.000	28.75	14.74	43.49	54.00	-10.51	AVG
3	17475.000	37.21	20.95	58.16	68.20	-10.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

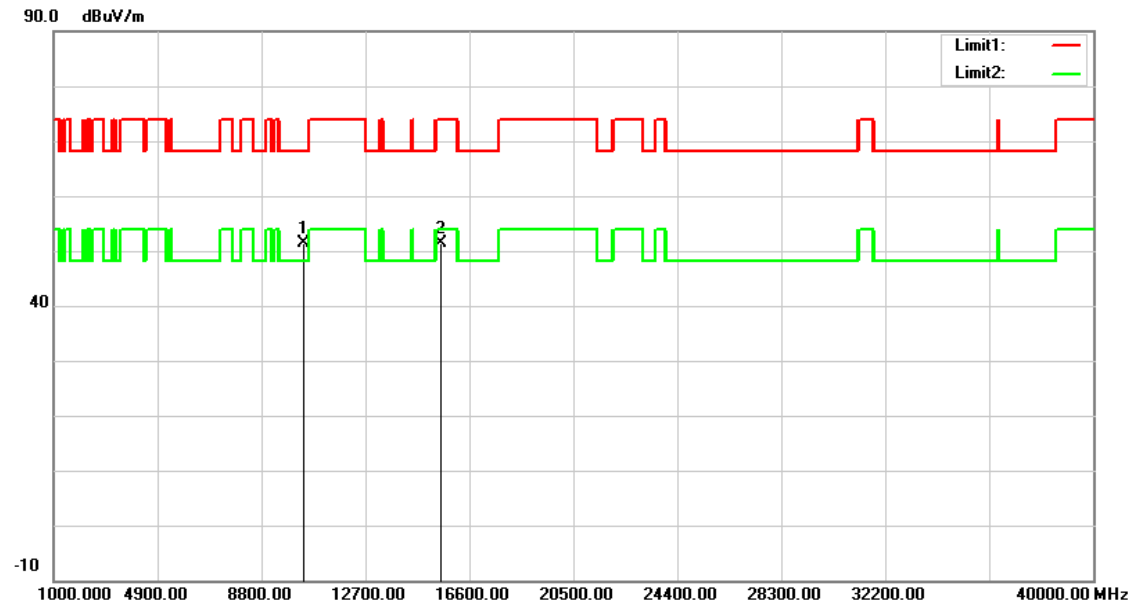


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	37.92	13.47	51.39	68.20	-16.81	peak
2	15540.000	35.63	15.74	51.37	74.00	-22.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

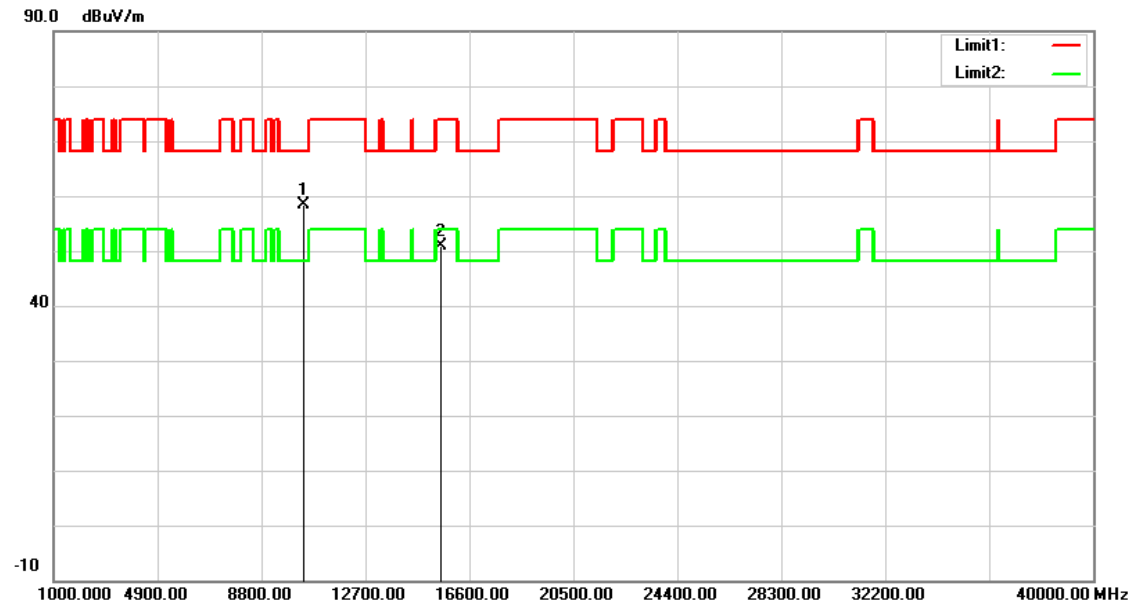


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	58.32	0.00	58.32	68.20	-9.88	peak
2	15540.000	35.09	15.74	50.83	74.00	-23.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

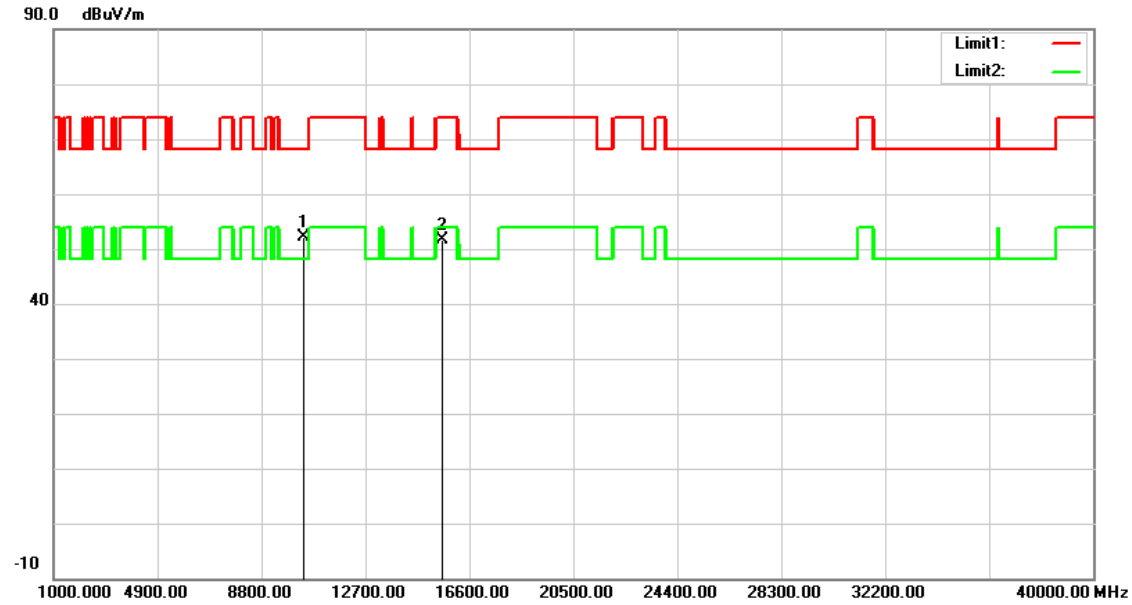


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	38.52	13.61	52.13	68.20	-16.07	peak
2	15600.000	35.95	15.59	51.54	74.00	-22.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

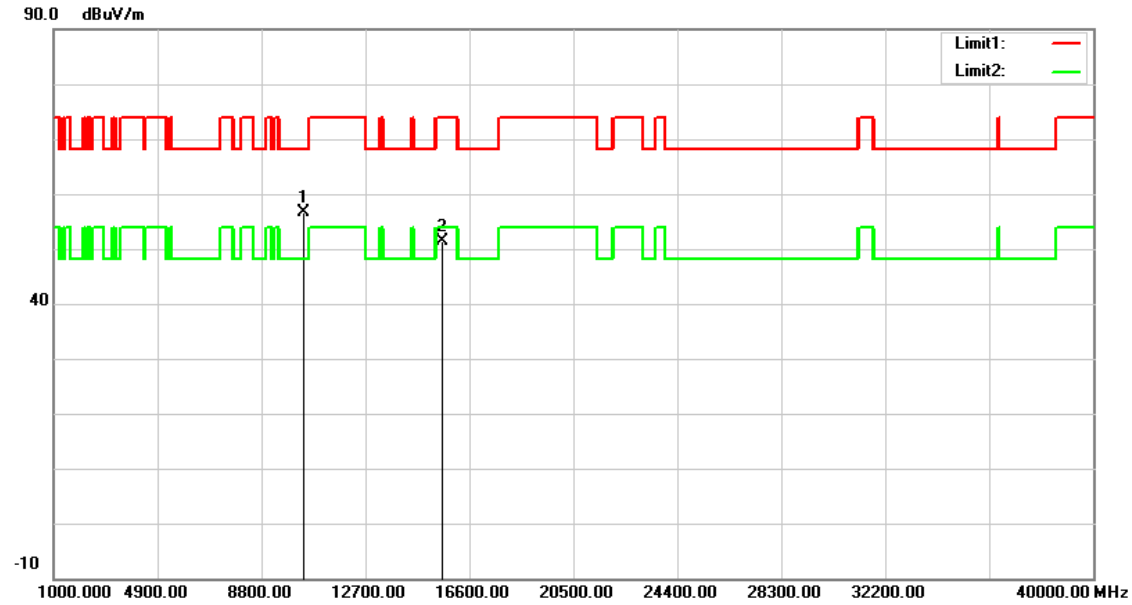


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	43.14	13.61	56.75	68.20	-11.45	peak
2	15600.000	35.91	15.59	51.50	74.00	-22.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

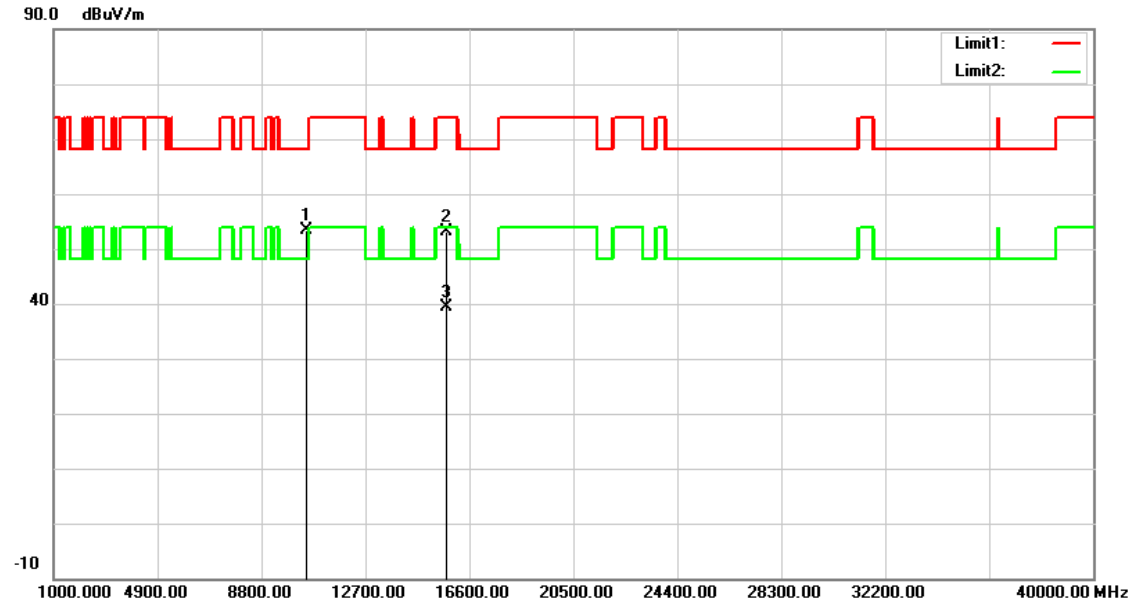


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	39.43	13.90	53.33	68.20	-14.87	peak
2	15720.000	37.86	15.30	53.16	74.00	-20.84	peak
3	15720.000	23.97	15.30	39.27	54.00	-14.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

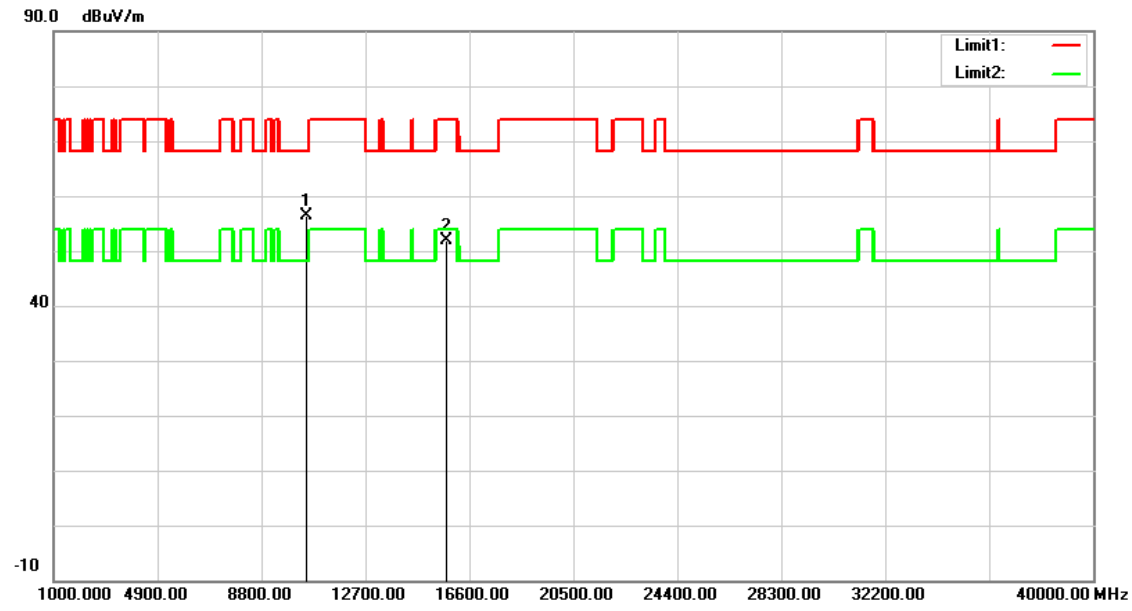


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	42.54	13.90	56.44	68.20	-11.76	peak
2	15720.000	36.56	15.30	51.86	74.00	-22.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

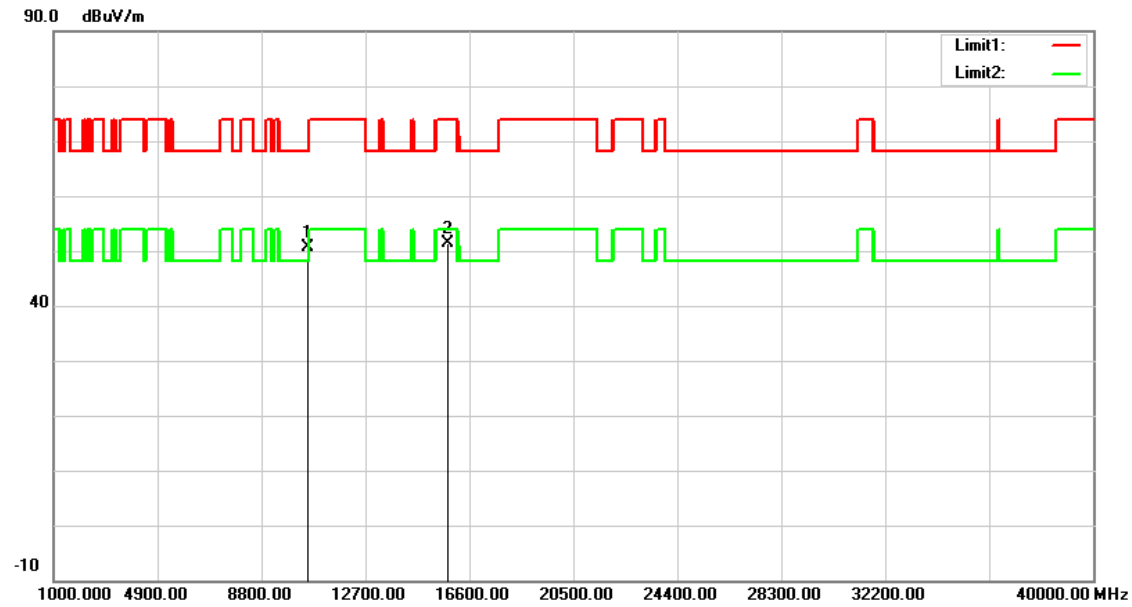


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.59	13.99	50.58	68.20	-17.62	peak
2	15780.000	36.21	15.18	51.39	74.00	-22.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

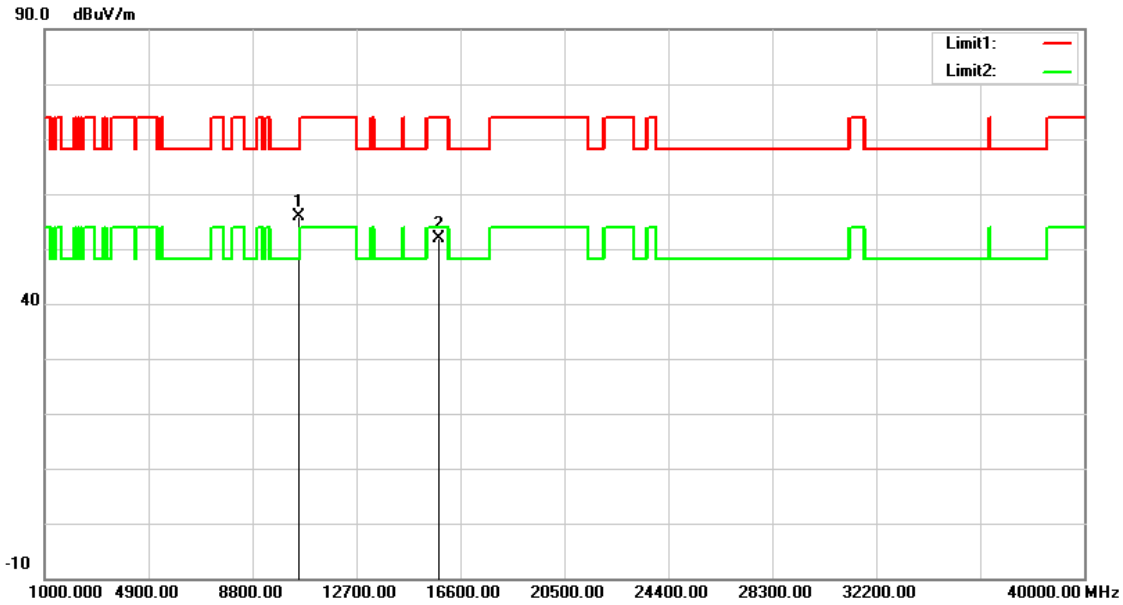


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	41.99	13.99	55.98	68.20	-12.22	peak
2	15780.000	36.61	15.18	51.79	74.00	-22.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

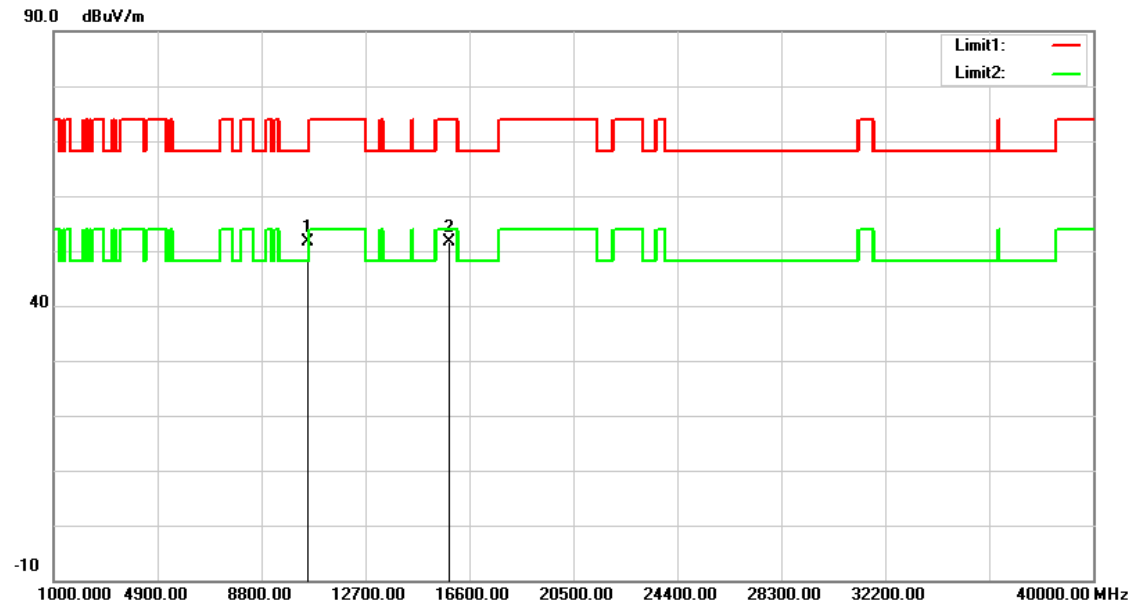


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	37.51	14.03	51.54	68.20	-16.66	peak
2	15840.000	36.47	15.04	51.51	74.00	-22.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

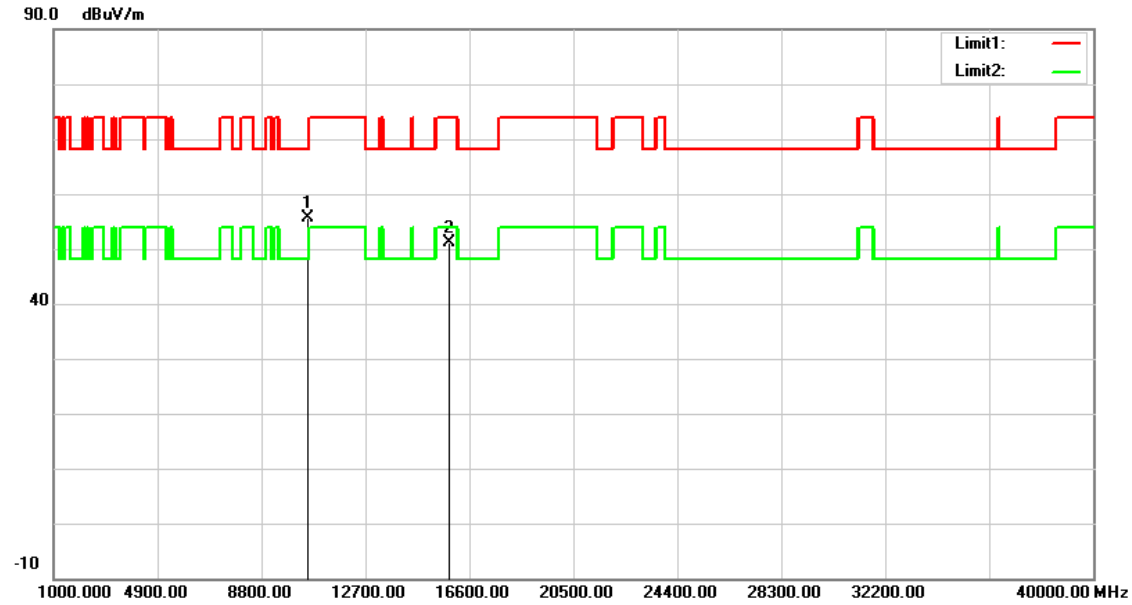


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	41.69	14.03	55.72	68.20	-12.48	peak
2	15840.000	35.99	15.04	51.03	74.00	-22.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

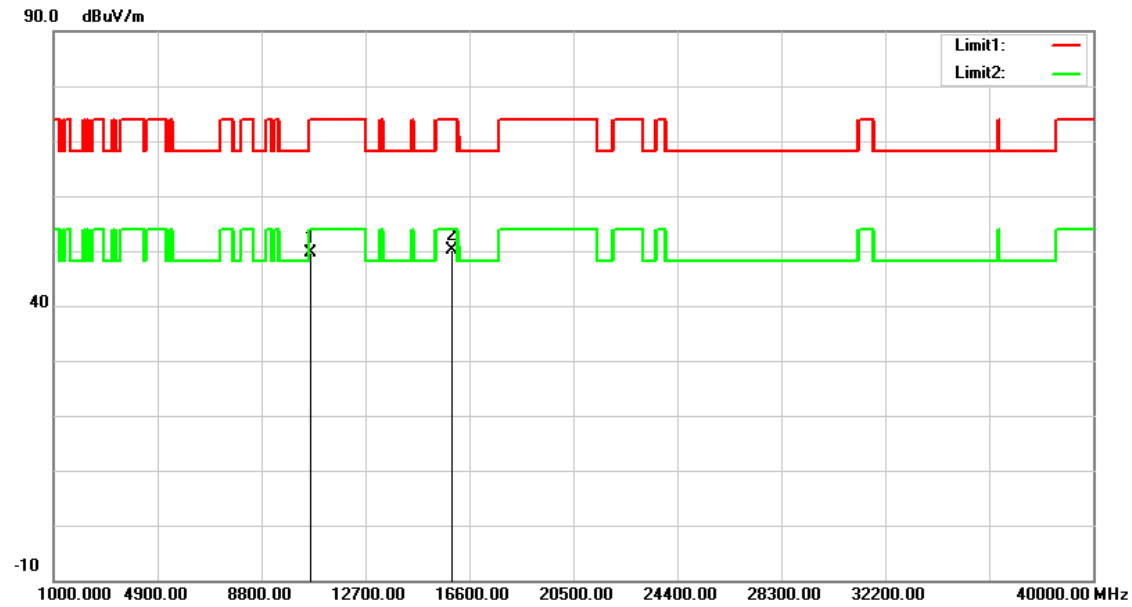


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.58	14.12	49.70	74.00	-24.30	peak
2	15960.000	35.44	14.75	50.19	74.00	-23.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

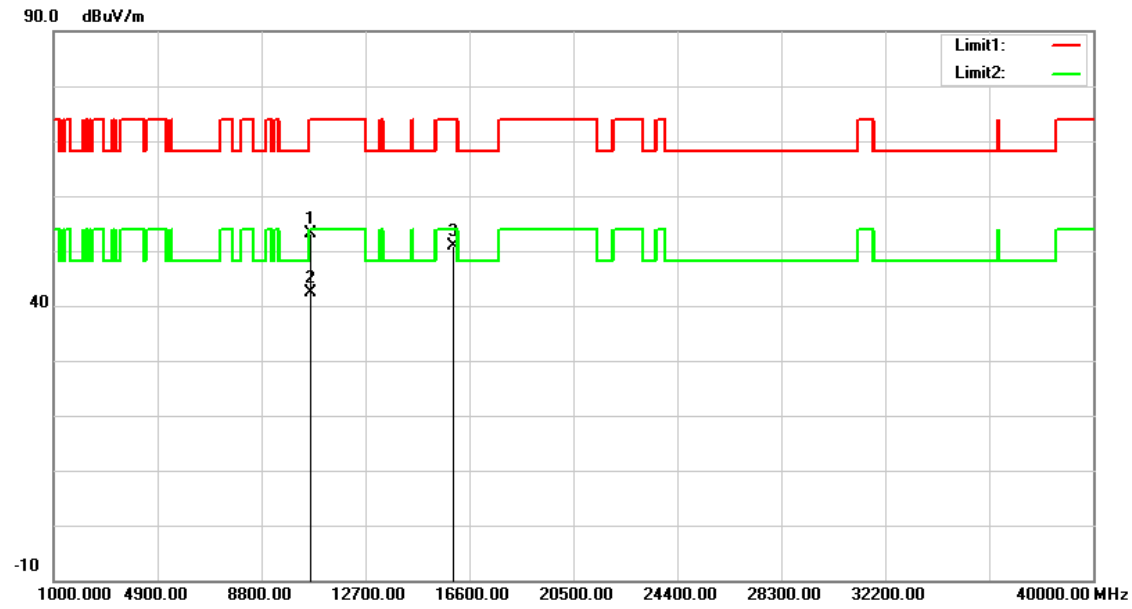


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	38.91	14.12	53.03	74.00	-20.97	peak
2	10640.000	28.29	14.12	42.41	54.00	-11.59	AVG
3	15960.000	36.02	14.75	50.77	74.00	-23.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

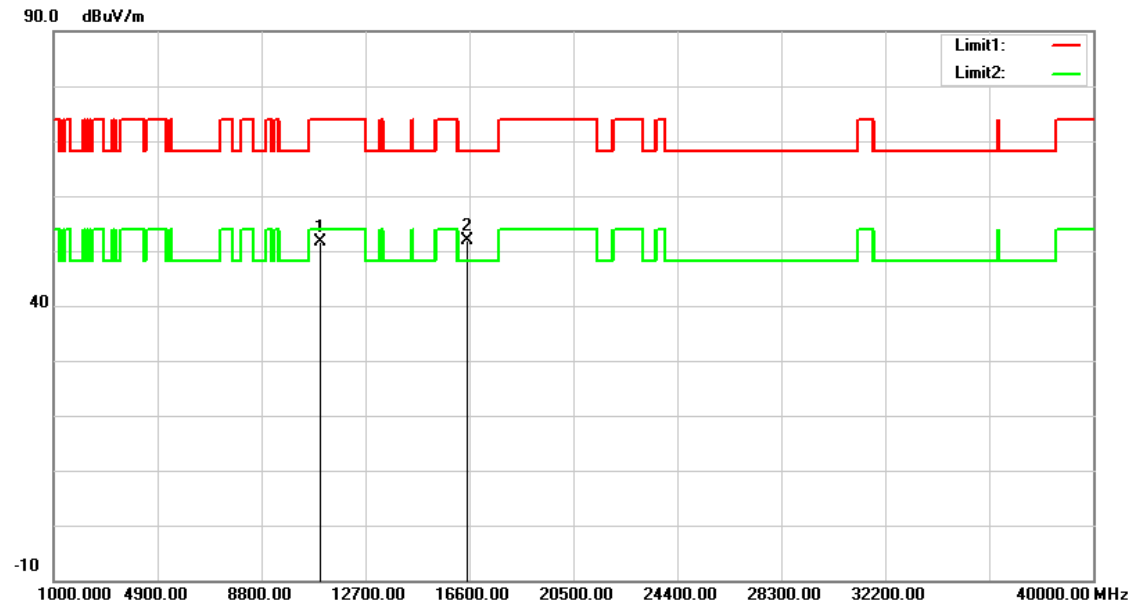


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	37.00	14.53	51.53	74.00	-22.47	peak
2	16500.000	36.17	15.80	51.97	68.20	-16.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

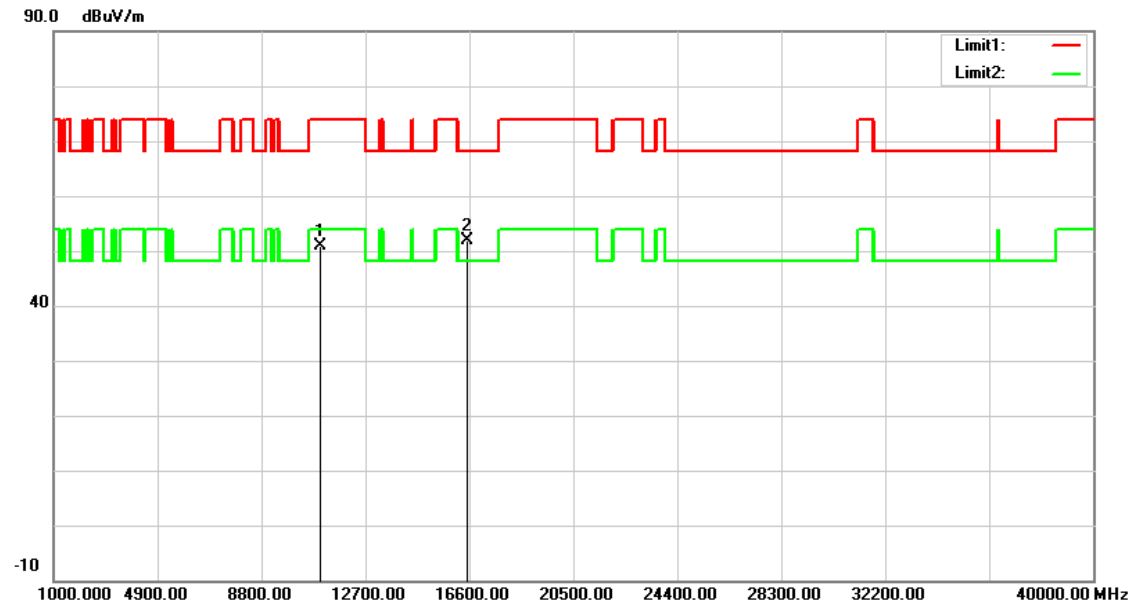


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.35	14.53	50.88	74.00	-23.12	peak
2	16500.000	36.03	15.80	51.83	68.20	-16.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

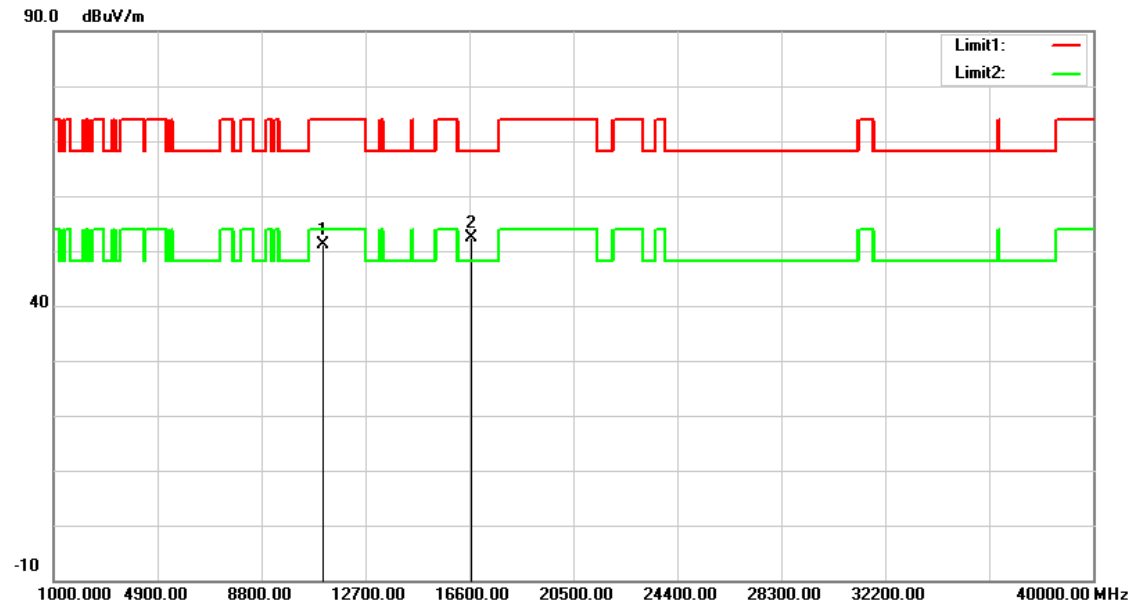


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.53	14.66	51.19	74.00	-22.81	peak
2	16680.000	35.63	16.79	52.42	68.20	-15.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

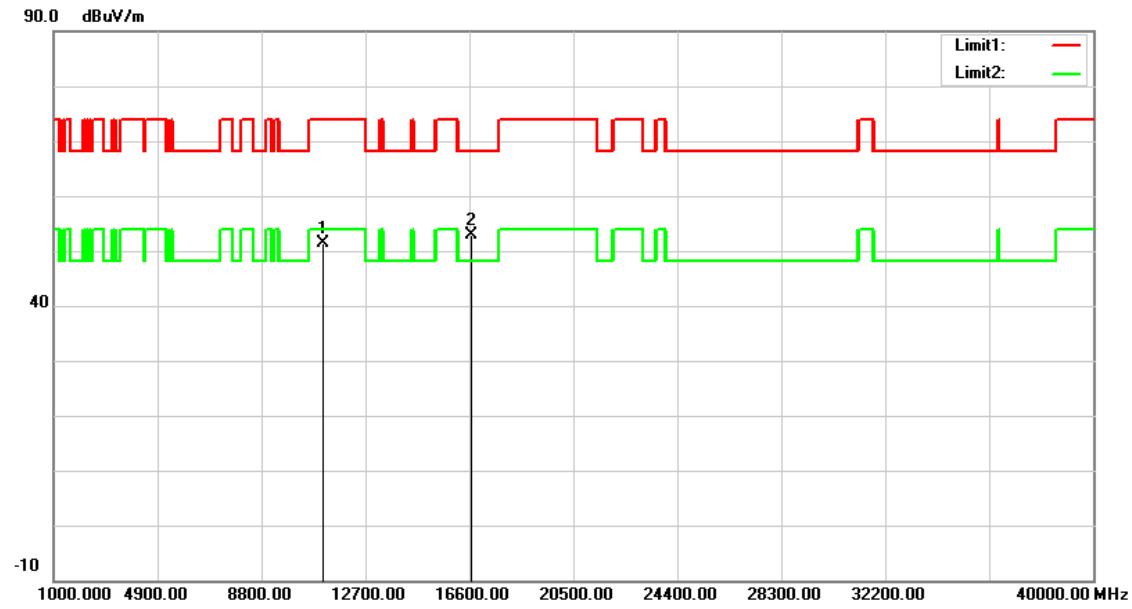


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.67	14.66	51.33	74.00	-22.67	peak
2	16680.000	36.18	16.79	52.97	68.20	-15.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

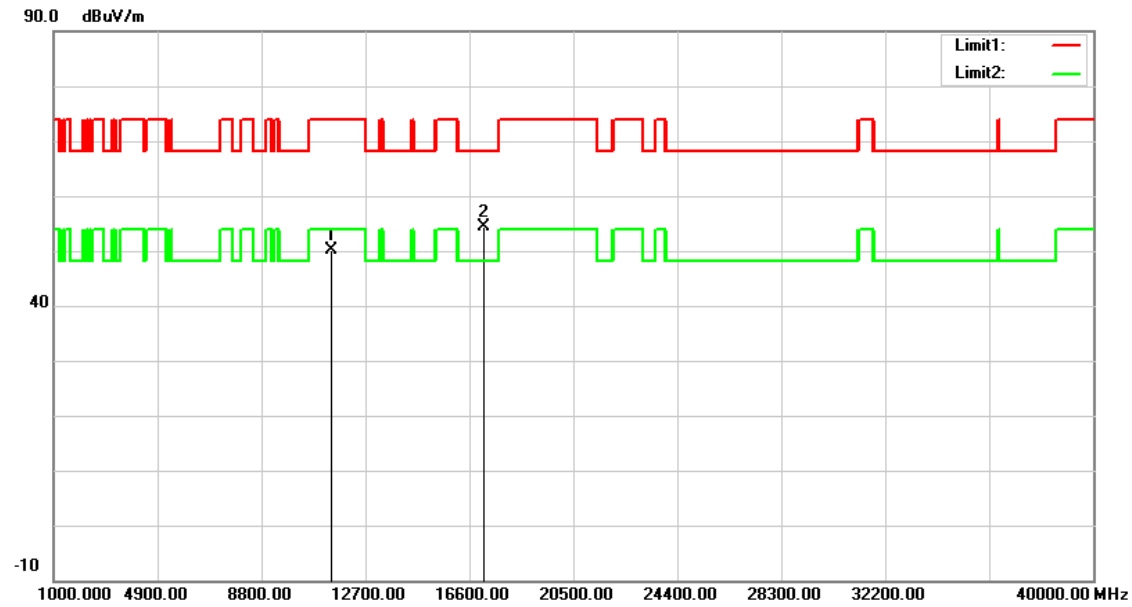


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	35.05	14.97	50.02	74.00	-23.98	peak
2	17160.000	35.11	19.36	54.47	68.20	-13.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

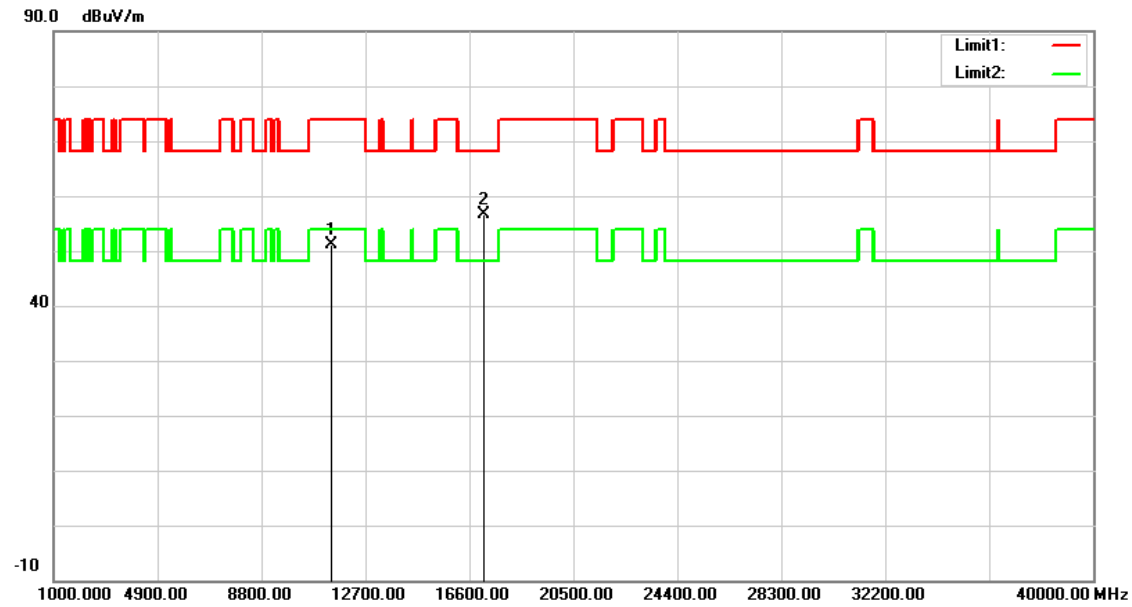


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	36.13	14.97	51.10	74.00	-22.90	peak
2	17160.000	37.38	19.36	56.74	68.20	-11.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

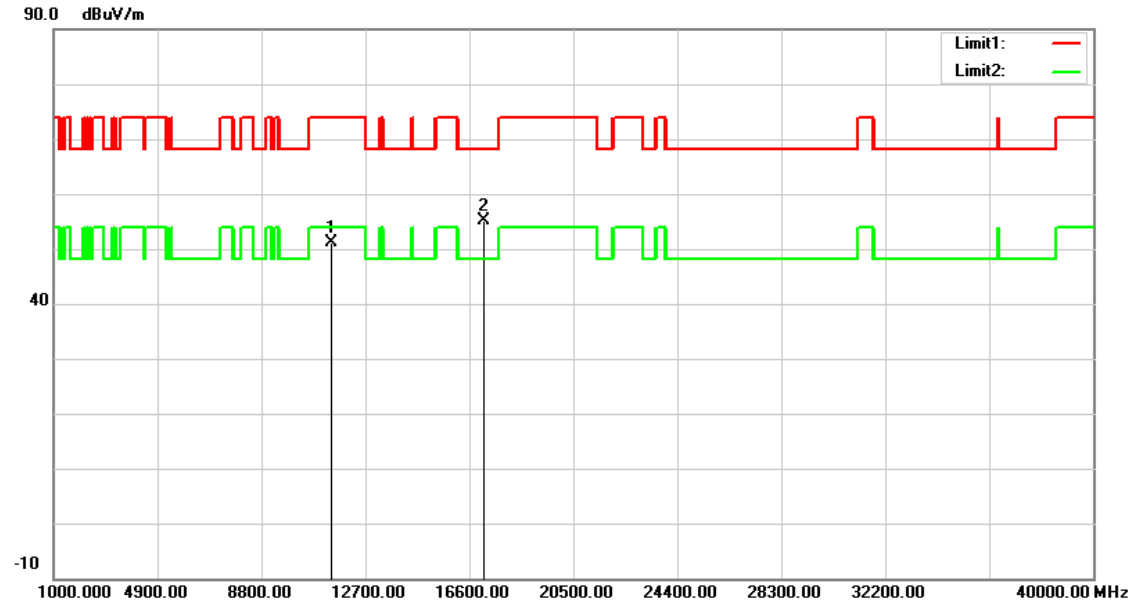


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	36.06	14.97	51.03	74.00	-22.97	peak
2	17160.000	35.75	19.36	55.11	68.20	-13.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

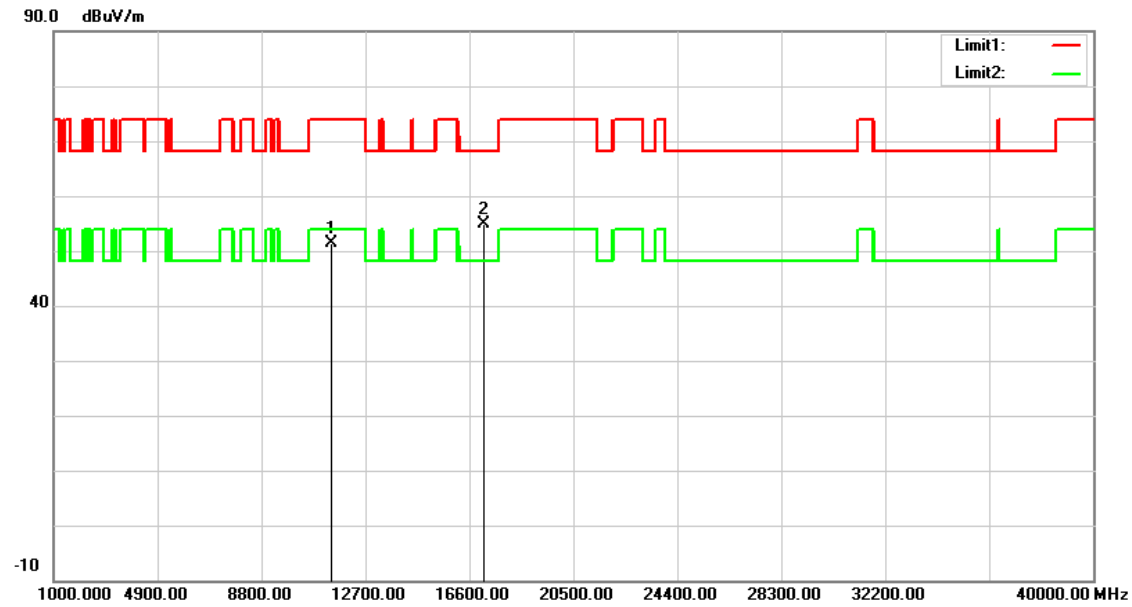


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	36.29	14.97	51.26	74.00	-22.74	peak
2	17160.000	35.44	19.36	54.80	68.20	-13.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

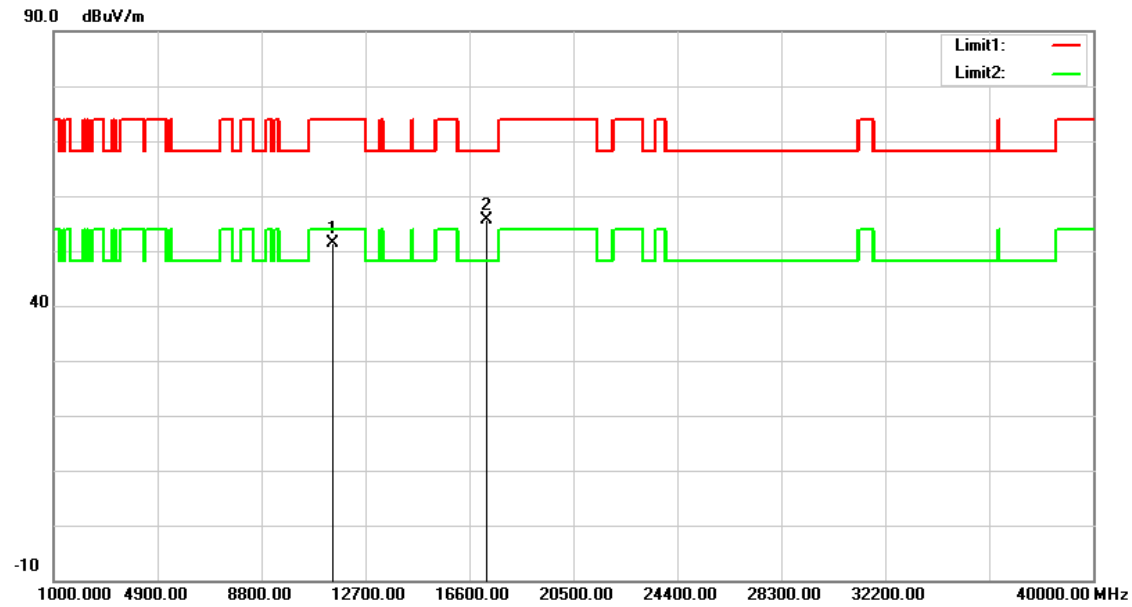


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.46	15.02	51.48	74.00	-22.52	peak
2	17235.000	35.98	19.74	55.72	68.20	-12.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

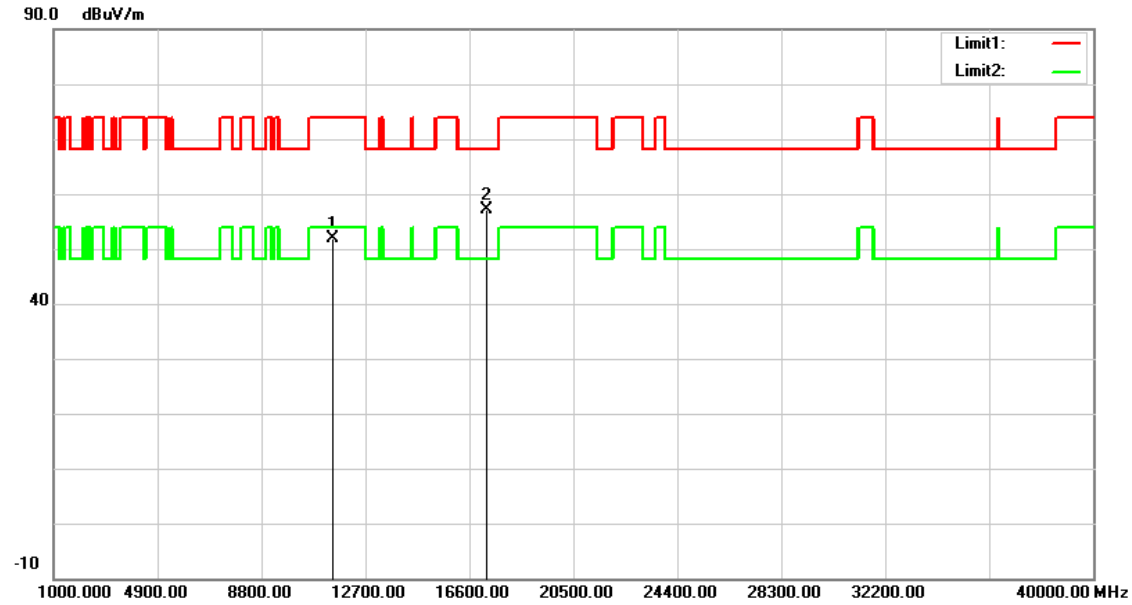


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.82	15.02	51.84	74.00	-22.16	peak
2	17235.000	37.33	19.74	57.07	68.20	-11.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

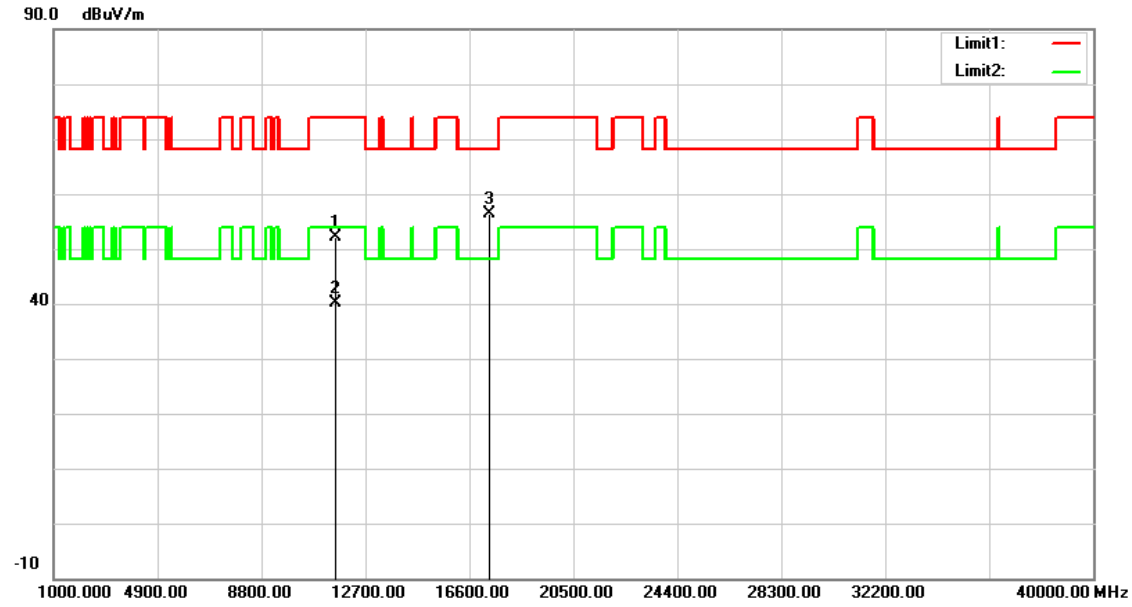


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	37.15	14.89	52.04	74.00	-21.96	peak
2	11570.000	25.19	14.89	40.08	54.00	-13.92	AVG
3	17355.000	35.94	20.34	56.28	68.20	-11.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

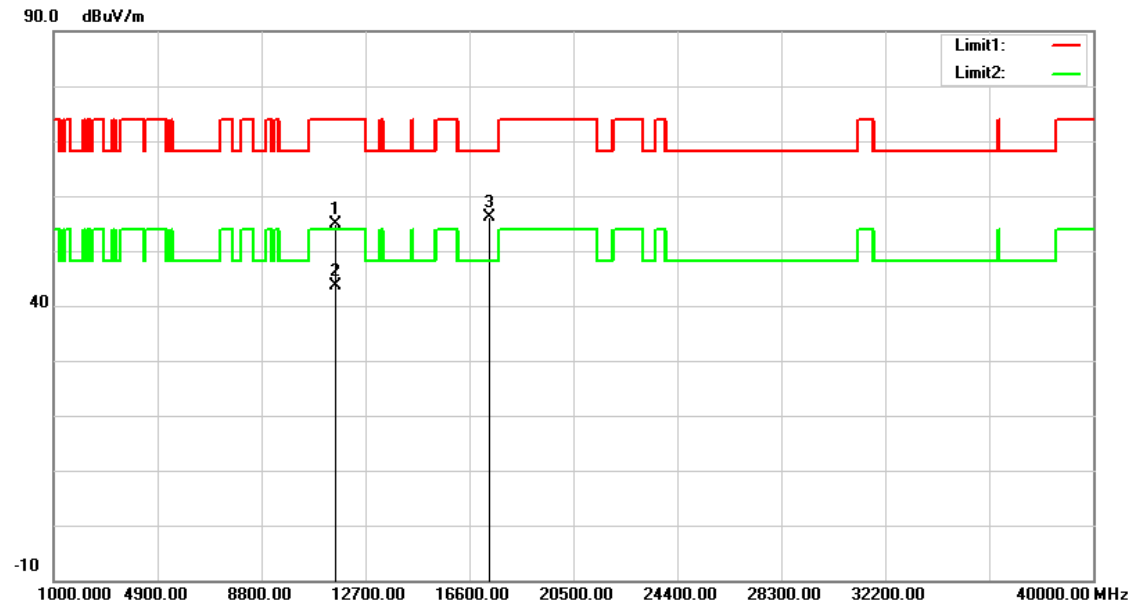


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	39.92	14.89	54.81	74.00	-19.19	peak
2	11570.000	28.77	14.89	43.66	54.00	-10.34	AVG
3	17355.000	35.78	20.34	56.12	68.20	-12.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

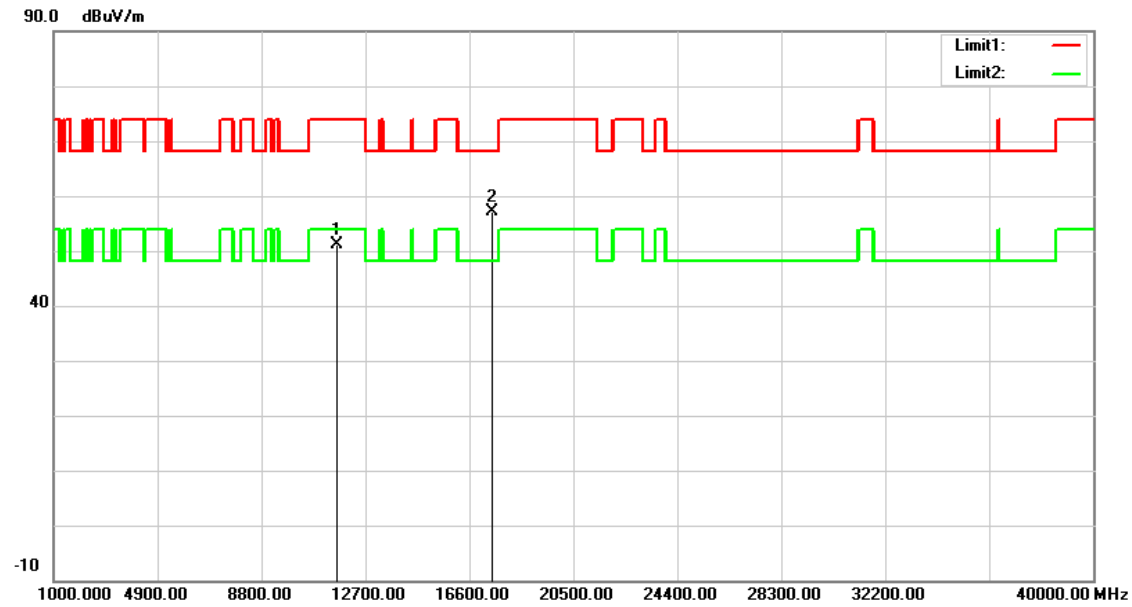


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.46	14.74	51.20	74.00	-22.80	peak
2	17475.000	36.18	20.95	57.13	68.20	-11.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

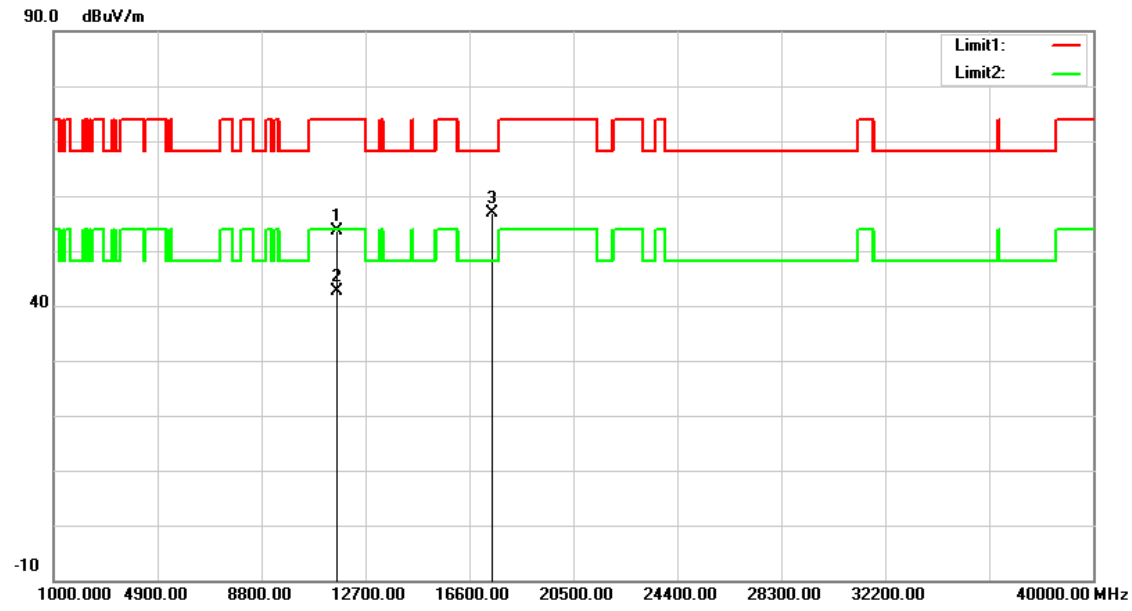


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	39.00	14.74	53.74	74.00	-20.26	peak
2	11650.000	27.92	14.74	42.66	54.00	-11.34	AVG
3	17475.000	35.81	20.95	56.76	68.20	-11.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

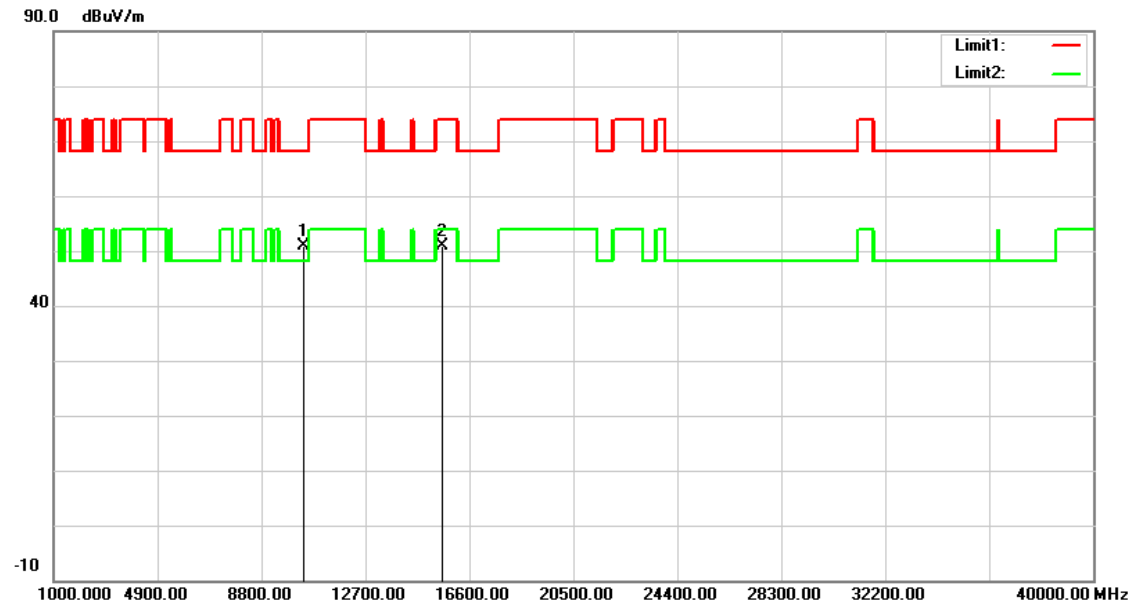


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	37.24	13.54	50.78	68.20	-17.42	peak
2	15570.000	35.14	15.66	50.80	74.00	-23.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

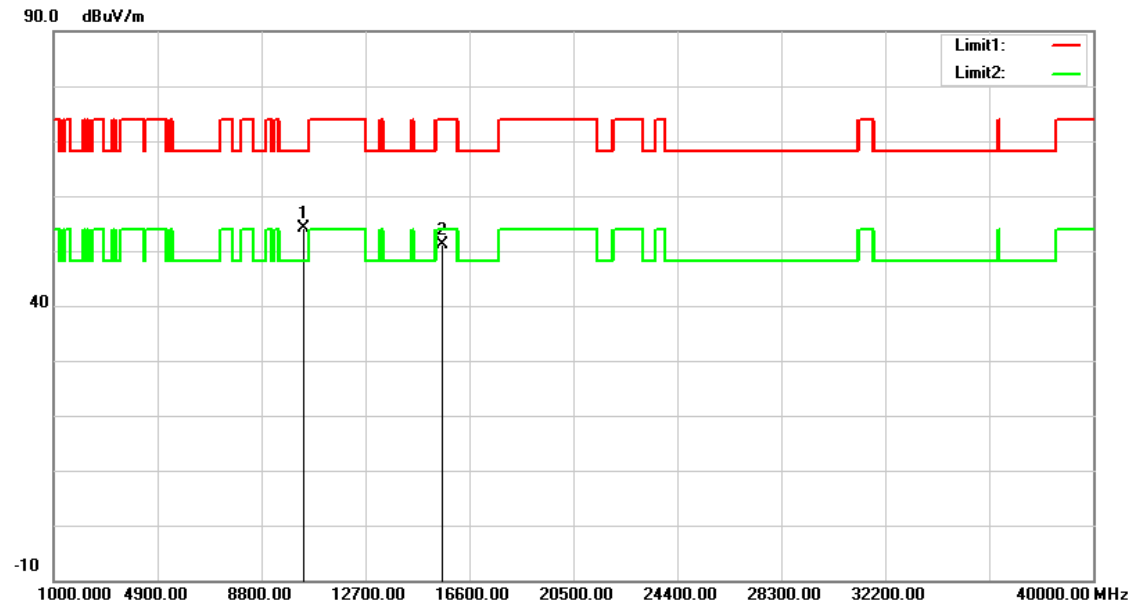


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	40.50	13.54	54.04	68.20	-14.16	peak
2	15570.000	35.39	15.66	51.05	74.00	-22.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

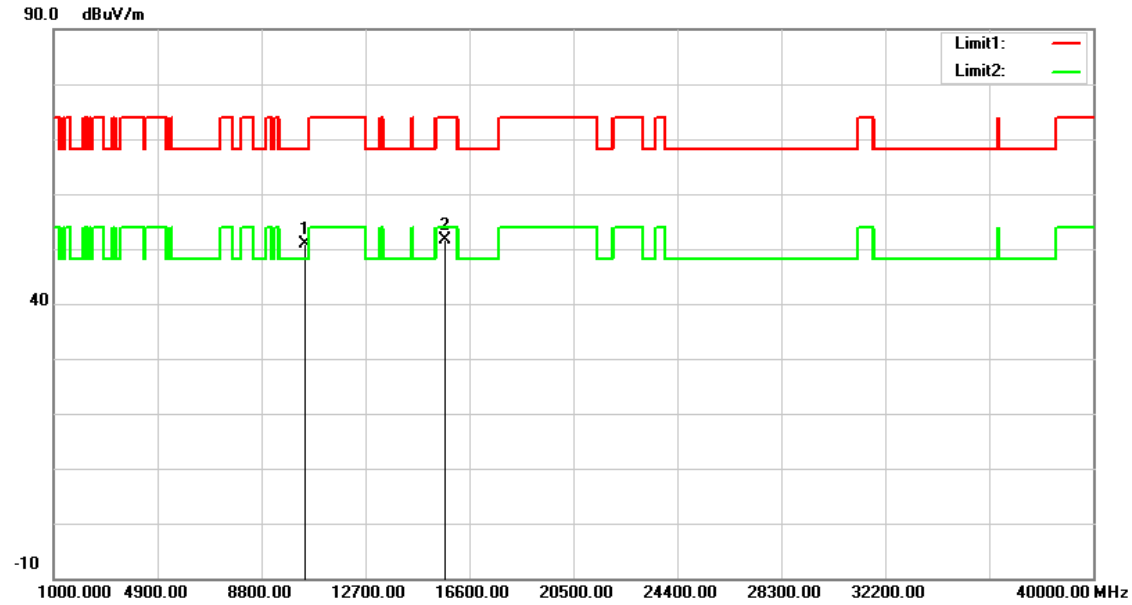


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	37.15	13.82	50.97	68.20	-17.23	peak
2	15690.000	36.18	15.38	51.56	74.00	-22.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

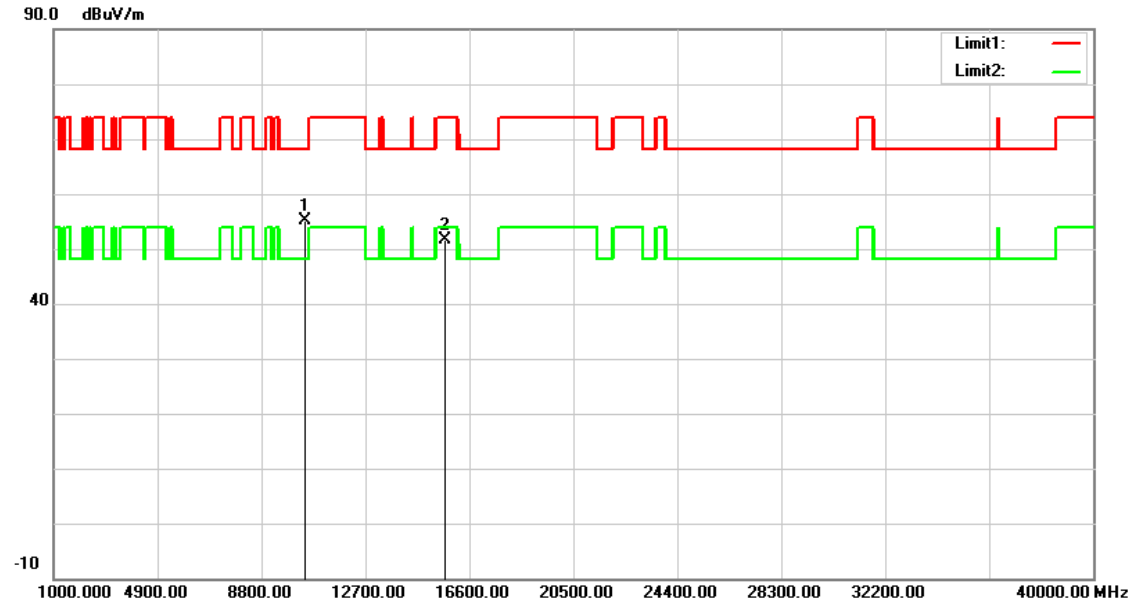


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	41.42	13.82	55.24	68.20	-12.96	peak
2	15690.000	36.19	15.38	51.57	74.00	-22.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

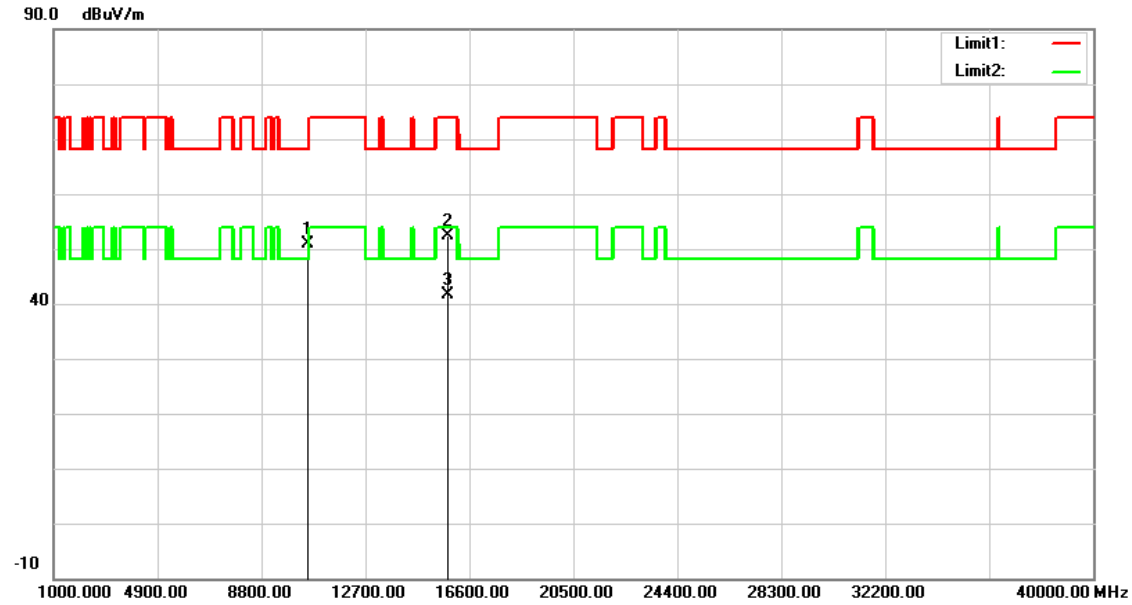


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	36.89	14.01	50.90	68.20	-17.30	peak
2	15810.000	37.38	15.10	52.48	74.00	-21.52	peak
3	15810.000	26.53	15.10	41.63	54.00	-12.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

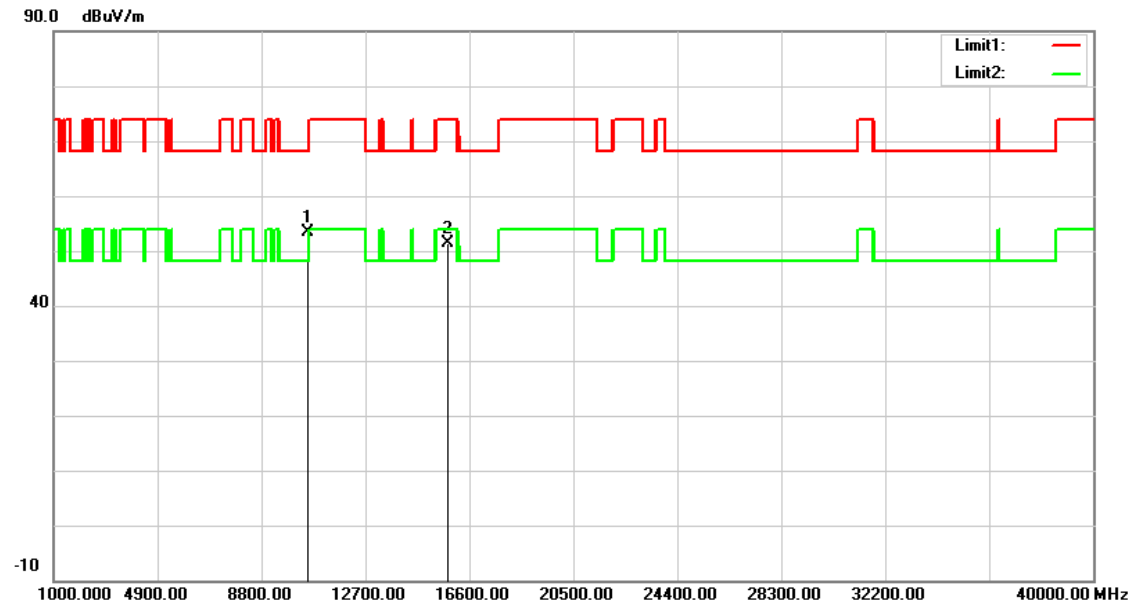


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	39.43	14.01	53.44	68.20	-14.76	peak
2	15810.000	36.34	15.10	51.44	74.00	-22.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

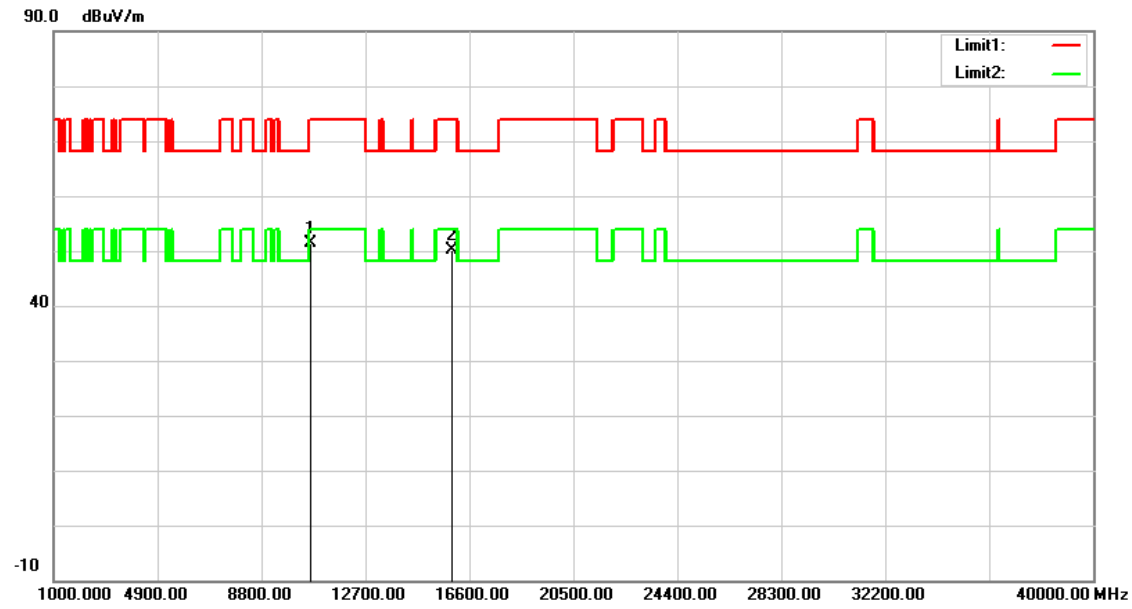


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	37.33	14.10	51.43	74.00	-22.57	peak
2	15930.000	35.25	14.82	50.07	74.00	-23.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

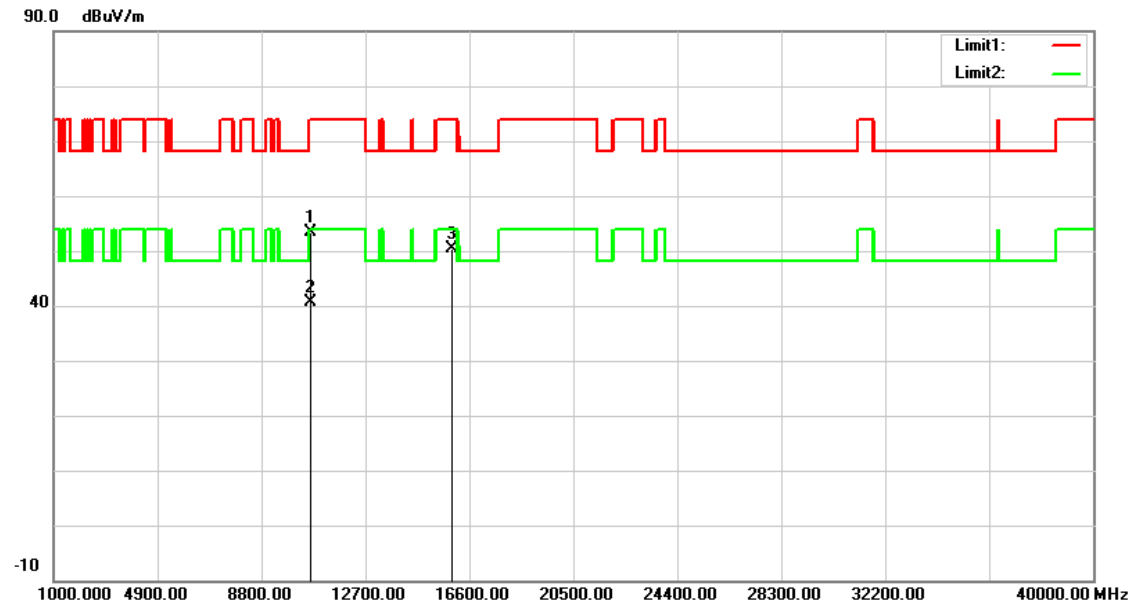


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	39.24	14.10	53.34	74.00	-20.66	peak
2	10620.000	26.59	14.10	40.69	54.00	-13.31	AVG
3	15930.000	35.46	14.82	50.28	74.00	-23.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

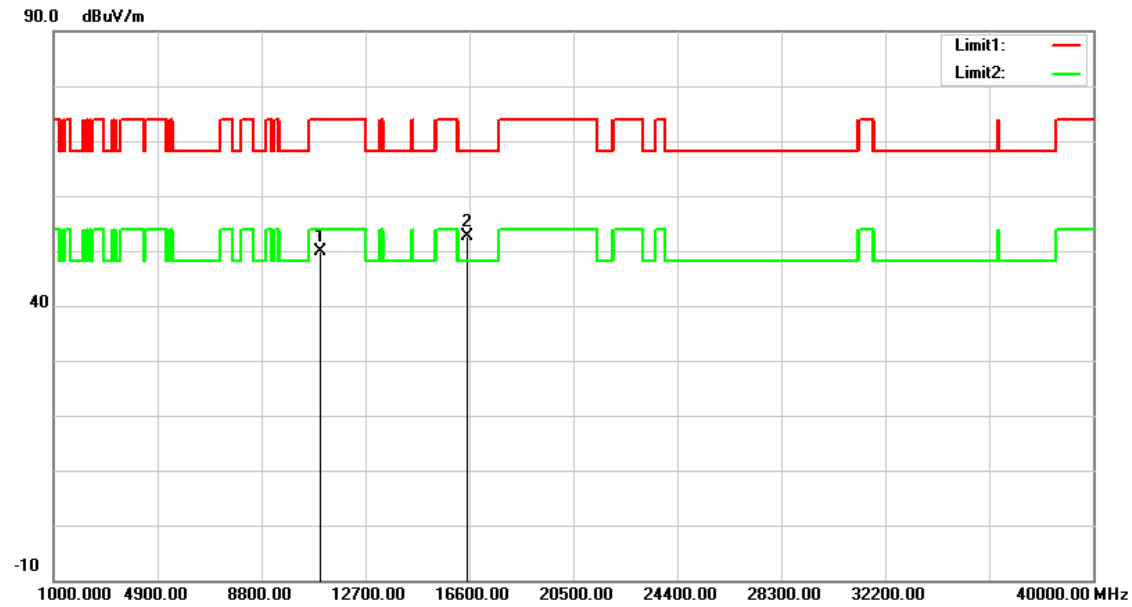


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.32	14.56	49.88	74.00	-24.12	peak
2	16530.000	36.73	15.96	52.69	68.20	-15.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

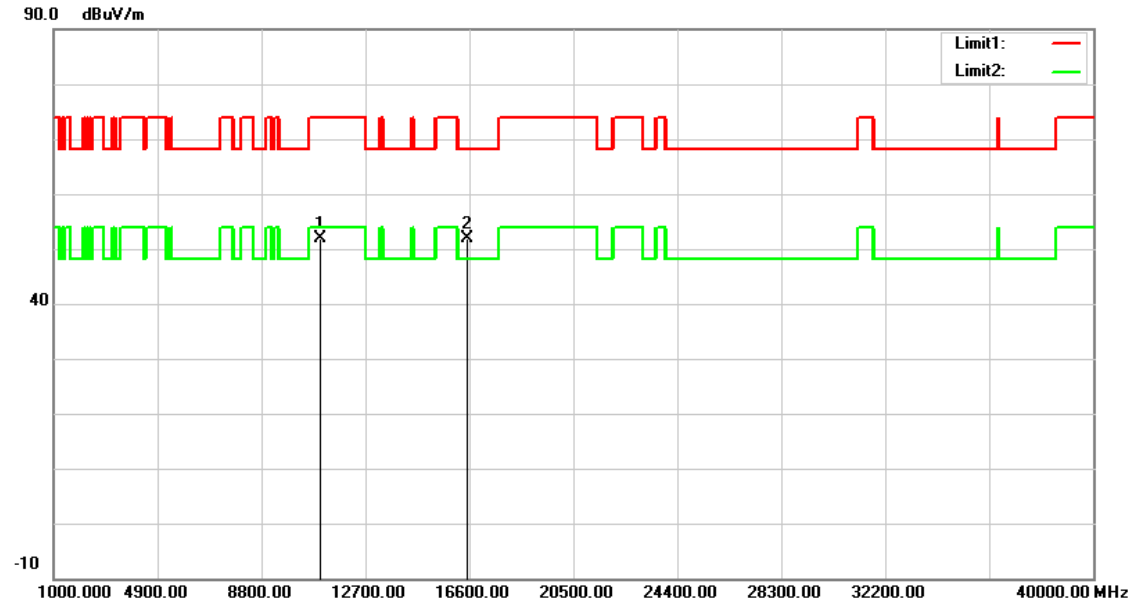


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	37.41	14.56	51.97	74.00	-22.03	peak
2	16530.000	35.87	15.96	51.83	68.20	-16.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

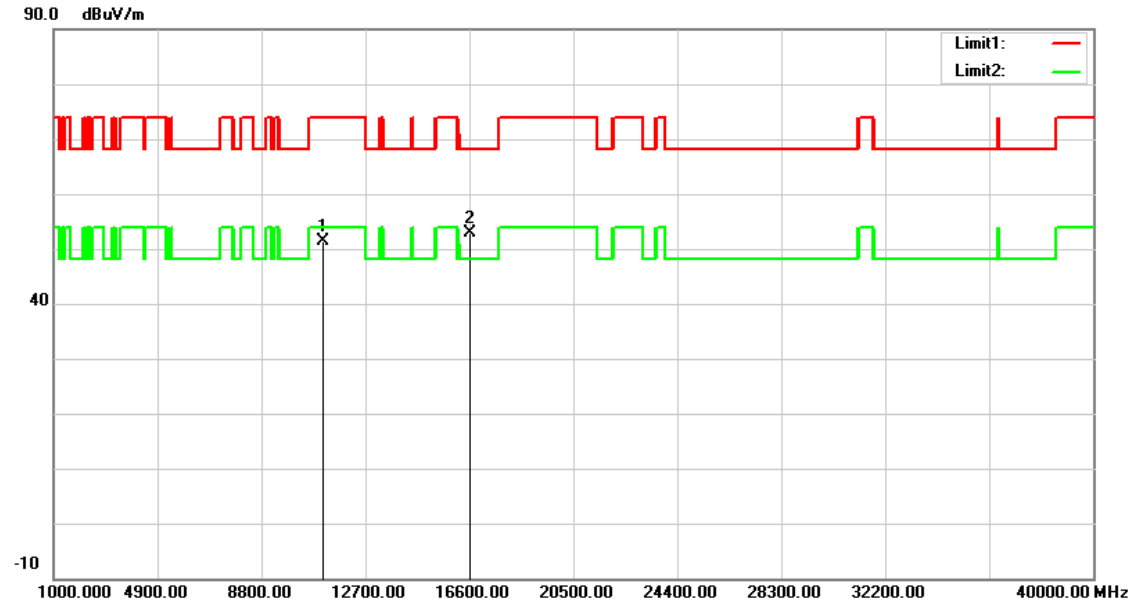


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.72	14.63	51.35	74.00	-22.65	peak
2	16650.000	36.31	16.63	52.94	68.20	-15.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

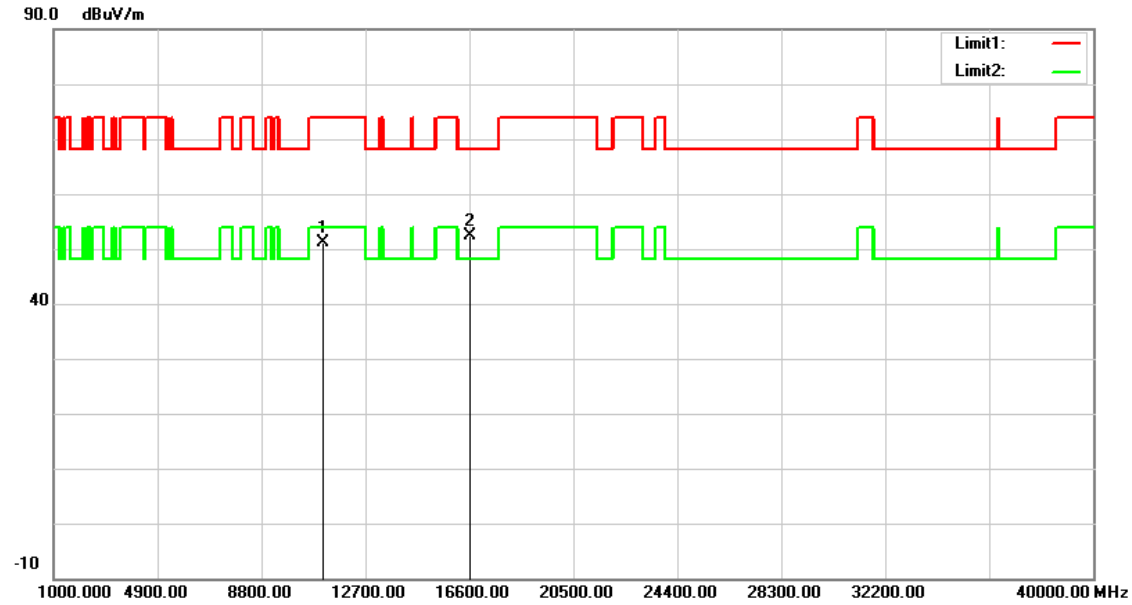


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.57	14.63	51.20	74.00	-22.80	peak
2	16650.000	35.77	16.63	52.40	68.20	-15.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

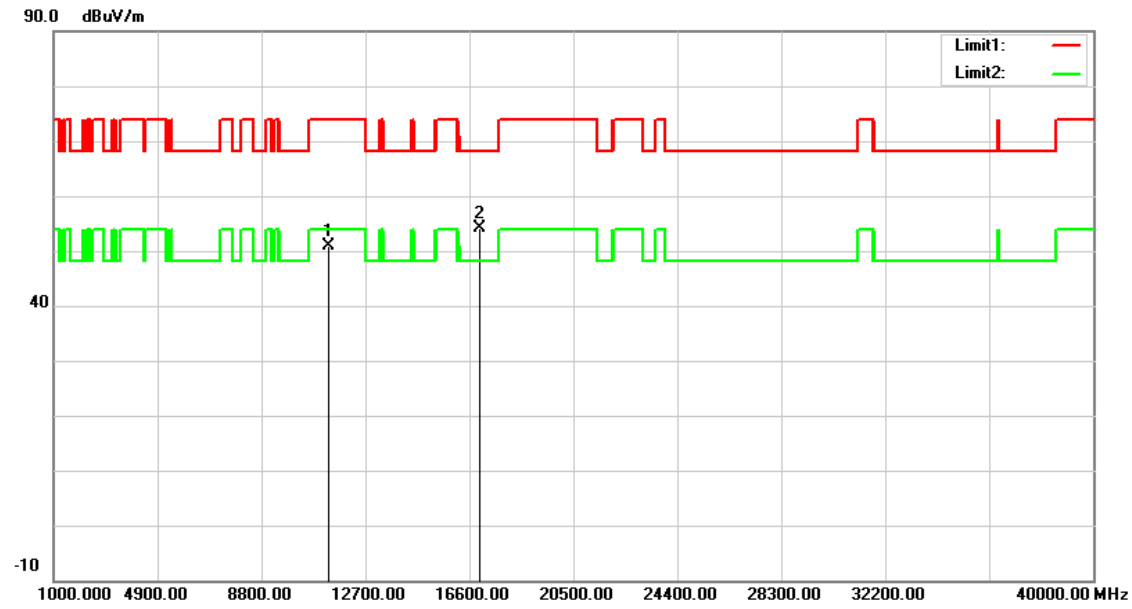


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.95	14.87	50.82	74.00	-23.18	peak
2	17010.000	35.56	18.61	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

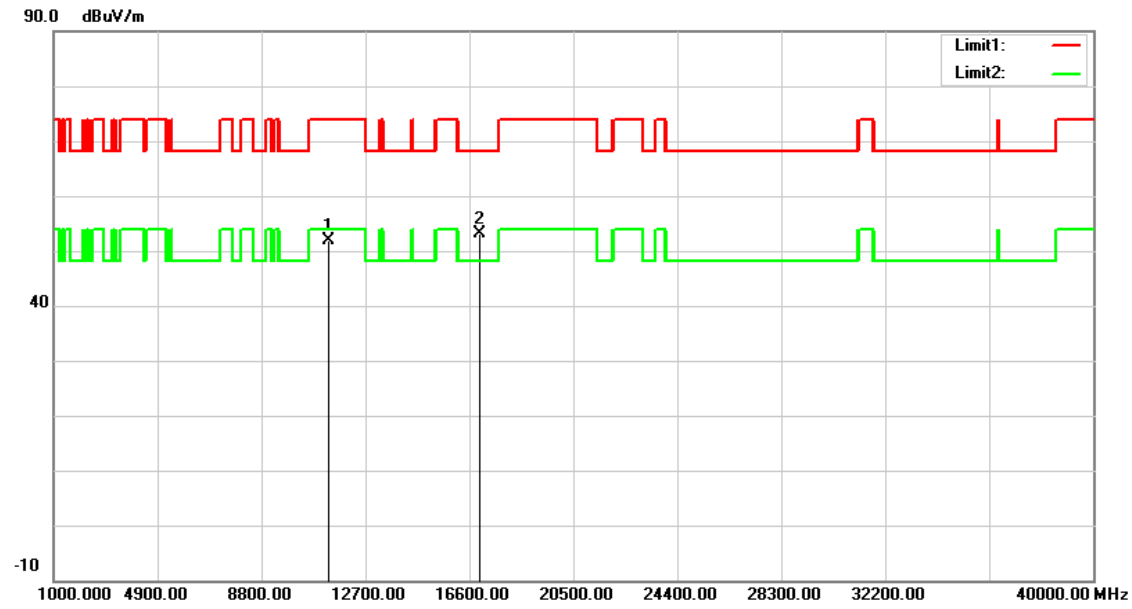


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	37.00	14.87	51.87	74.00	-22.13	peak
2	17010.000	34.51	18.61	53.12	68.20	-15.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

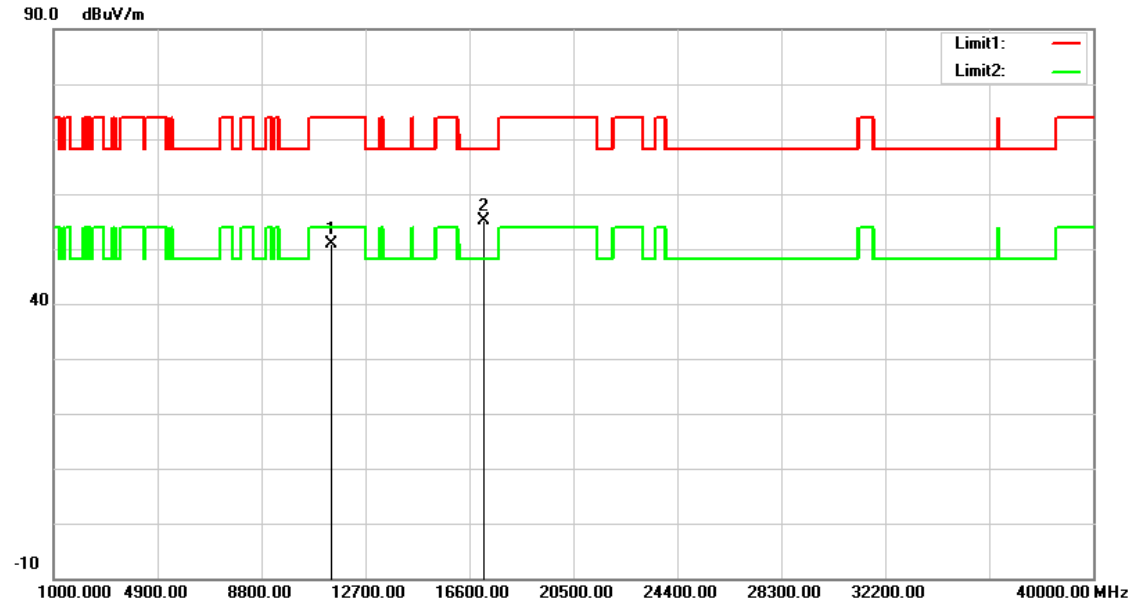


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.85	14.96	50.81	74.00	-23.19	peak
2	17130.000	35.94	19.21	55.15	68.20	-13.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

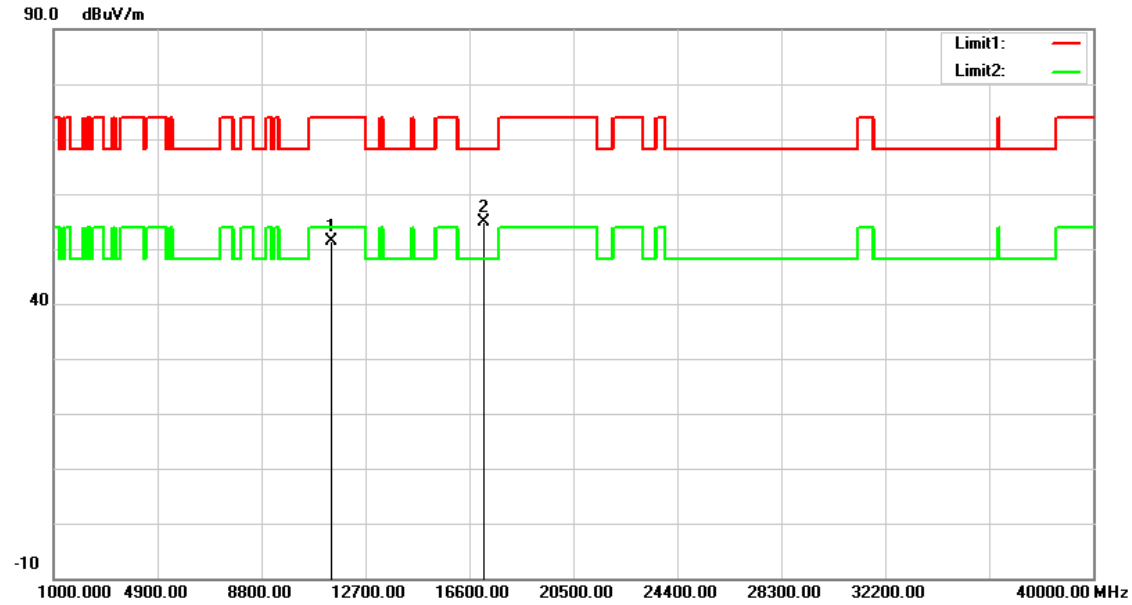


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	36.32	14.96	51.28	74.00	-22.72	peak
2	17130.000	35.73	19.21	54.94	68.20	-13.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

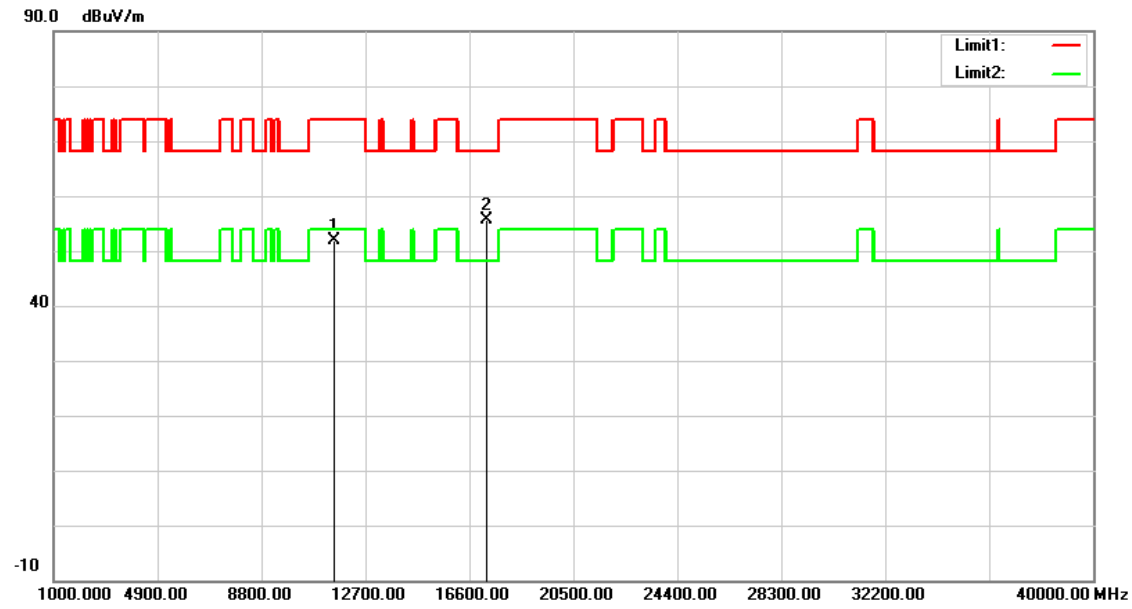


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.78	15.02	51.80	74.00	-22.20	peak
2	17265.000	35.69	19.89	55.58	68.20	-12.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

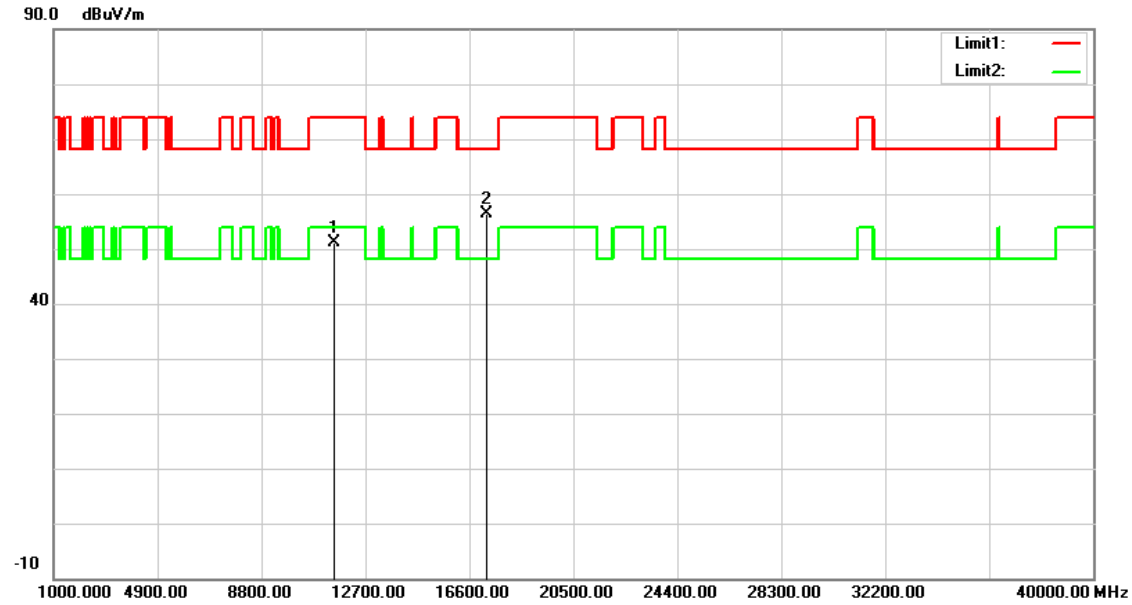


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.21	15.02	51.23	74.00	-22.77	peak
2	17265.000	36.38	19.89	56.27	68.20	-11.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

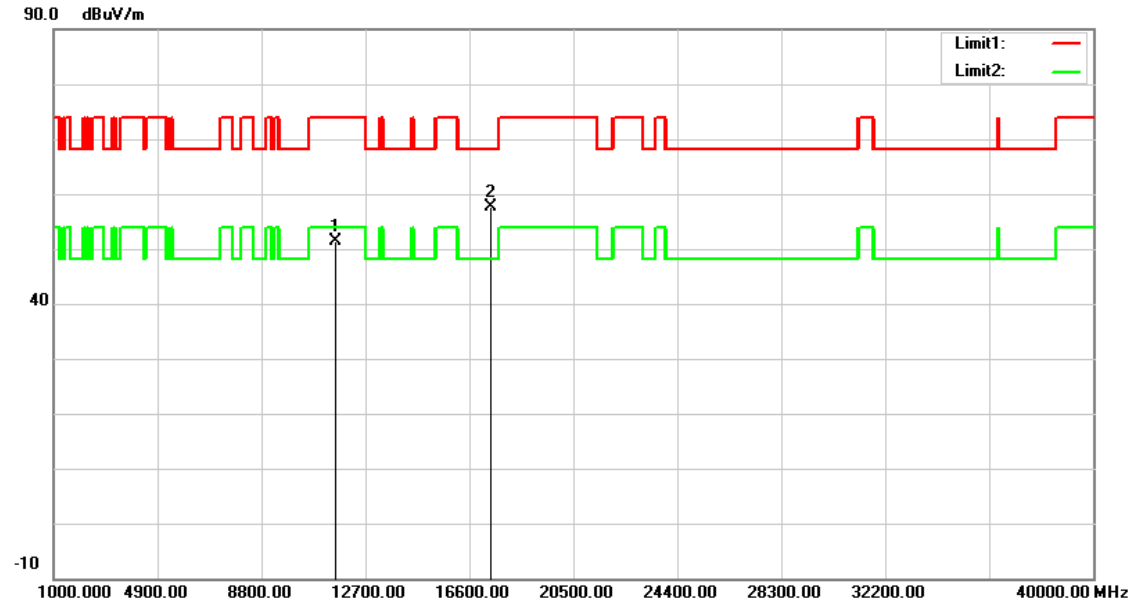


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.61	14.85	51.46	74.00	-22.54	peak
2	17385.000	37.13	20.49	57.62	68.20	-10.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

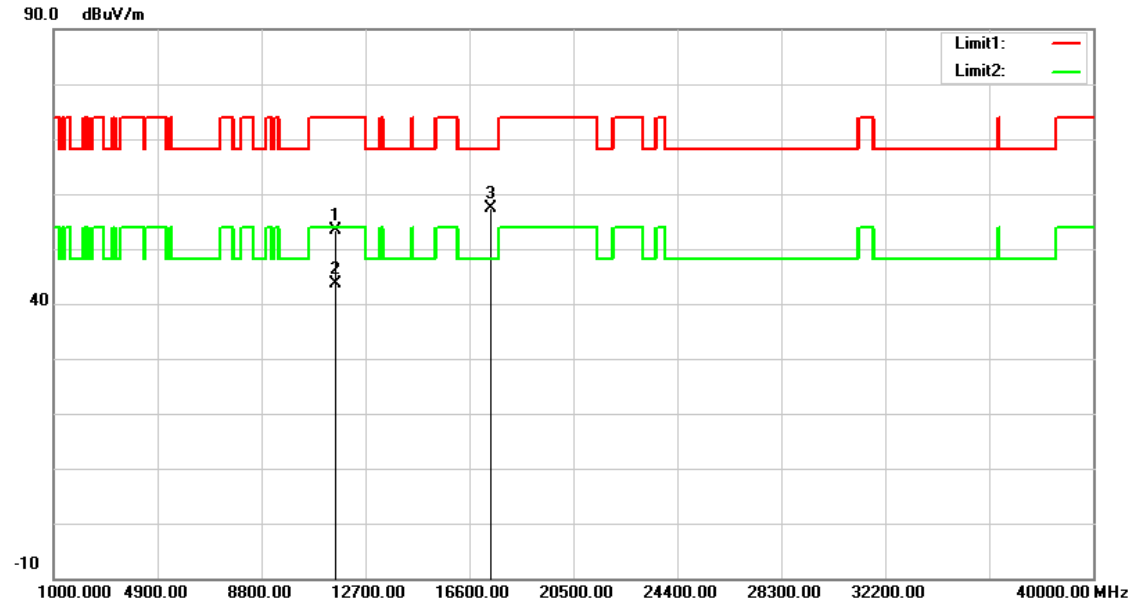


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.45	14.85	53.30	74.00	-20.70	peak
2	11590.000	28.81	14.85	43.66	54.00	-10.34	AVG
3	17385.000	36.98	20.49	57.47	68.20	-10.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

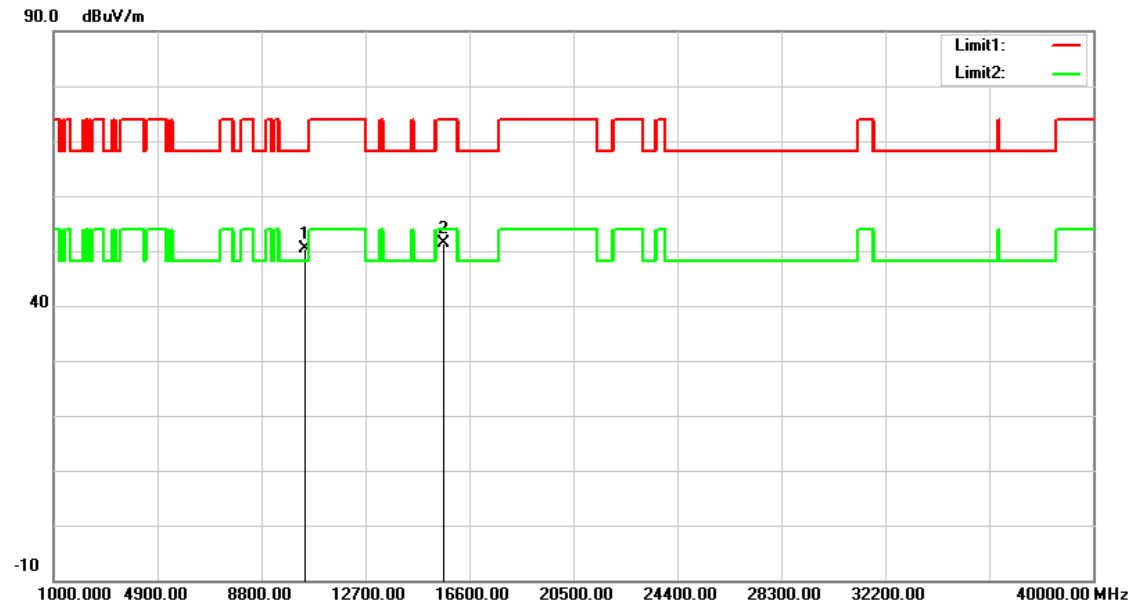


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.81	13.68	50.49	68.20	-17.71	peak
2	15630.000	35.79	15.53	51.32	74.00	-22.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

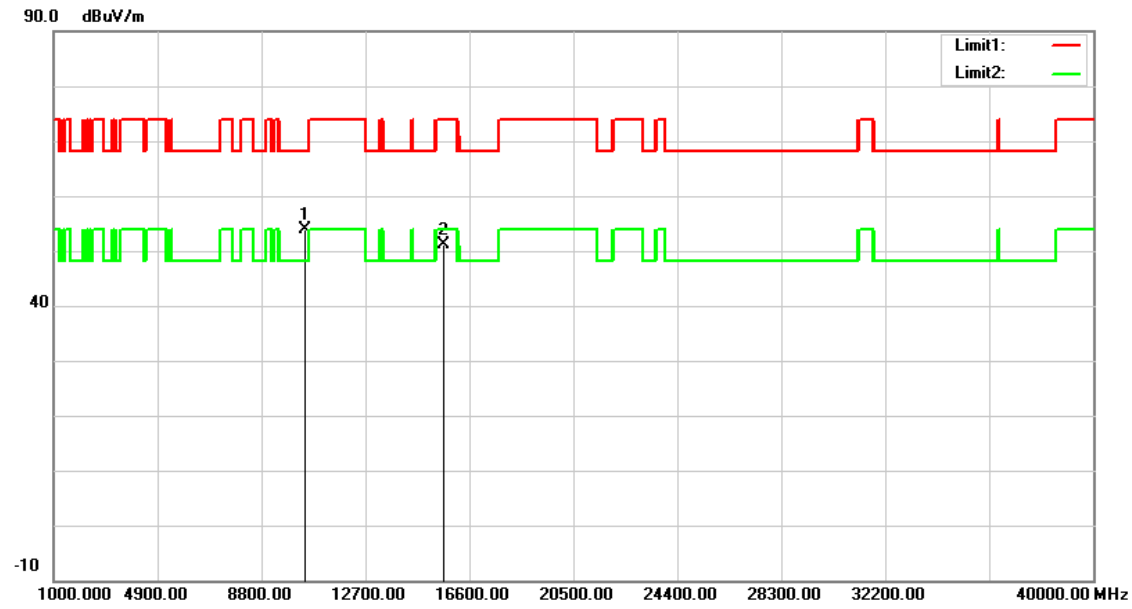


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	40.21	13.68	53.89	68.20	-14.31	peak
2	15630.000	35.53	15.53	51.06	74.00	-22.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

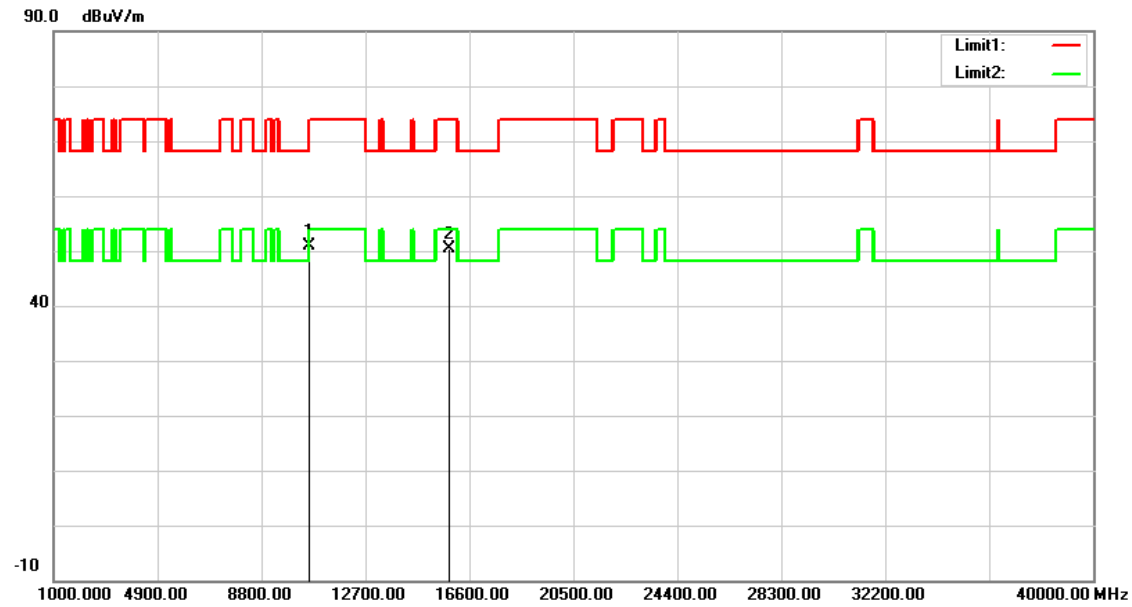


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.76	14.06	50.82	68.20	-17.38	peak
2	15870.000	35.52	14.96	50.48	74.00	-23.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

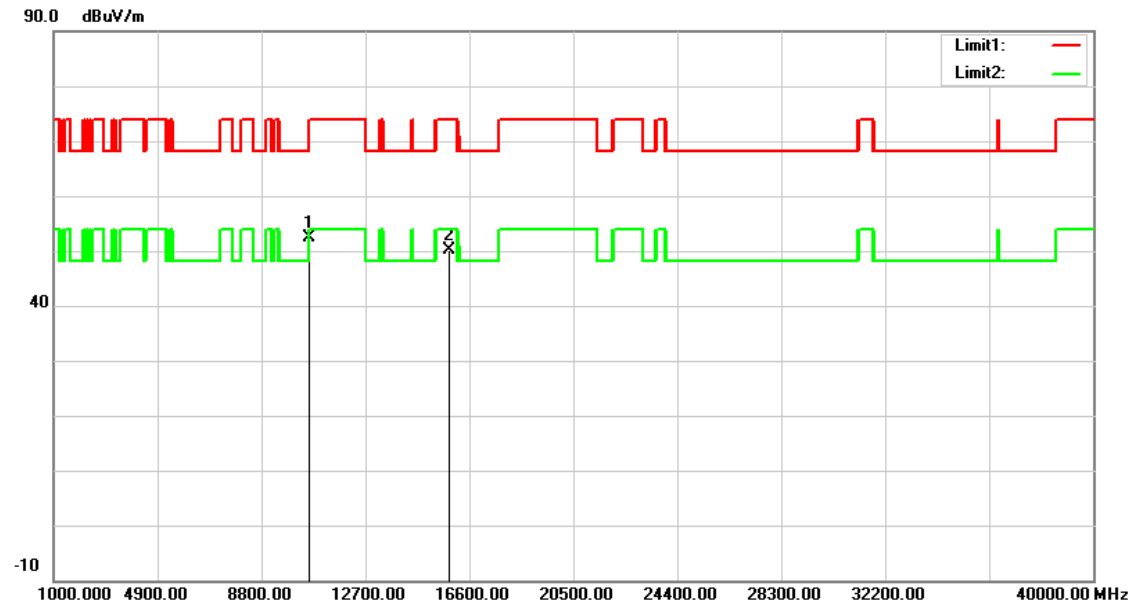


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	38.20	14.06	52.26	68.20	-15.94	peak
2	15870.000	35.18	14.96	50.14	74.00	-23.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

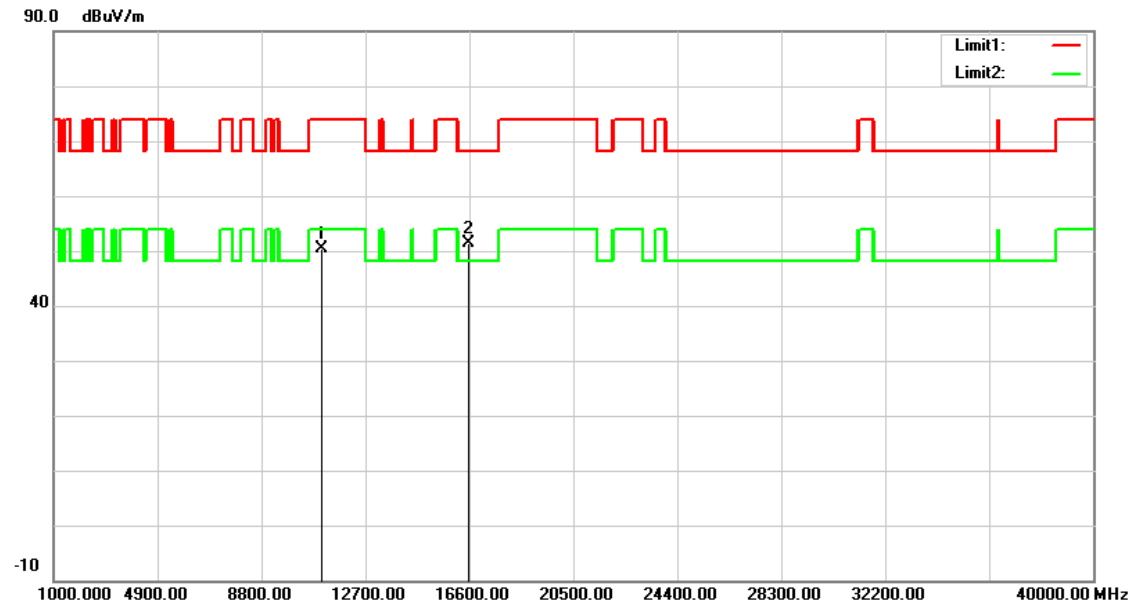


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.81	14.59	50.40	74.00	-23.60	peak
2	16590.000	35.10	16.30	51.40	68.20	-16.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

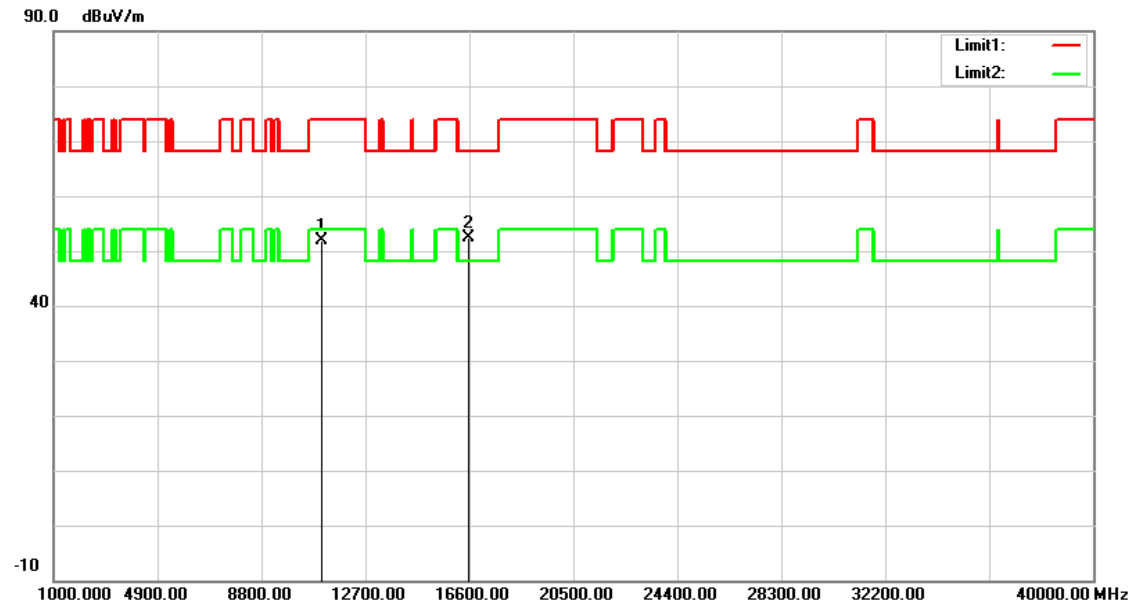


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	37.23	14.59	51.82	74.00	-22.18	peak
2	16590.000	35.98	16.30	52.28	68.20	-15.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

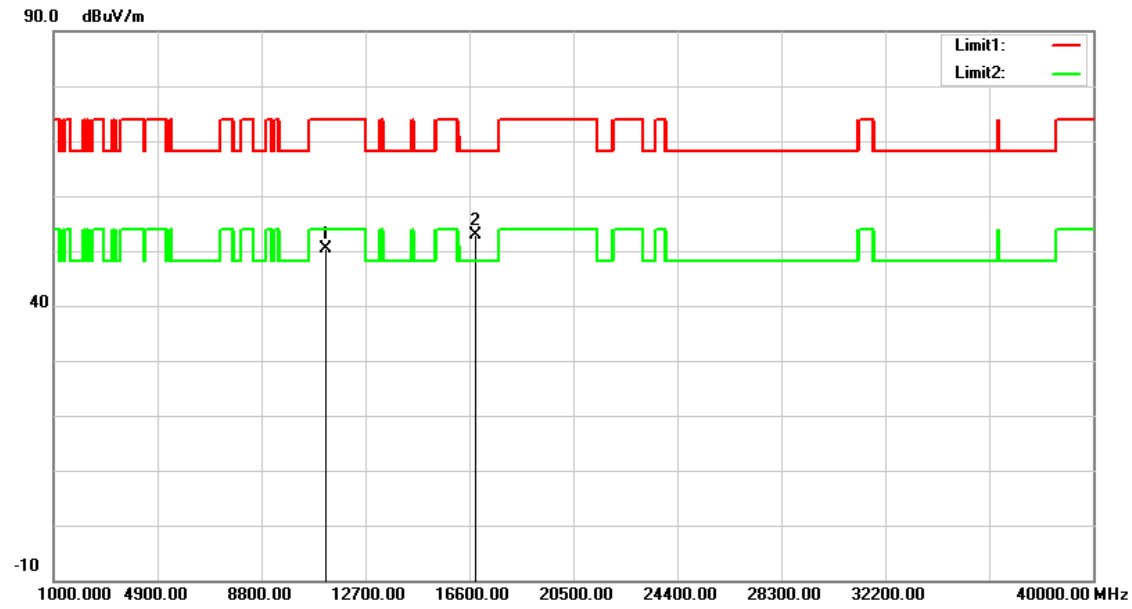


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	35.59	14.76	50.35	74.00	-23.65	peak
2	16830.000	35.18	17.62	52.80	68.20	-15.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

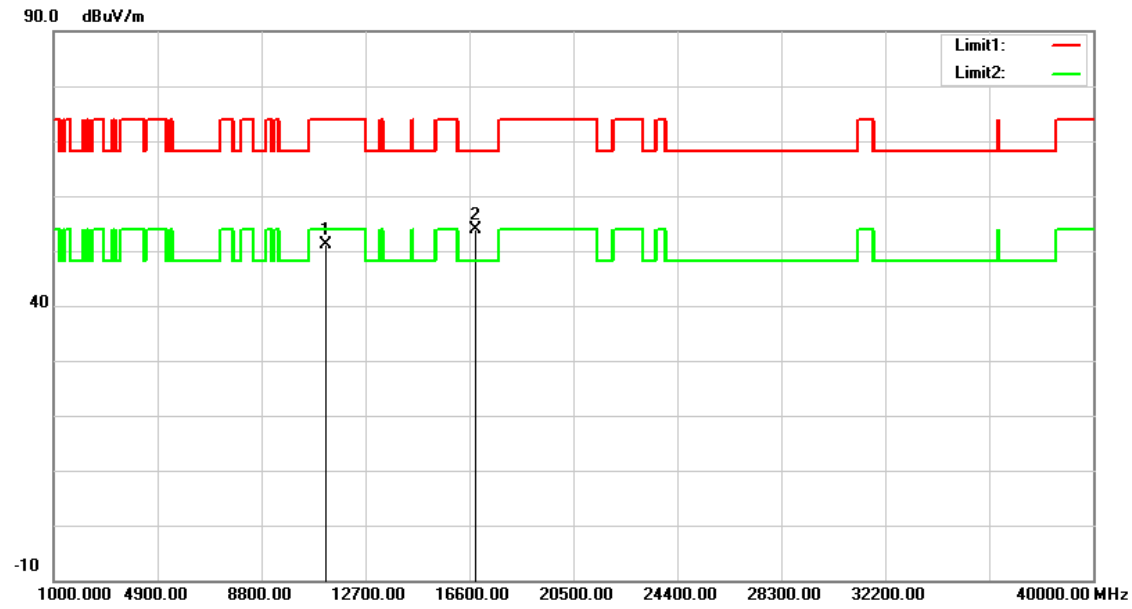


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	36.29	14.76	51.05	74.00	-22.95	peak
2	16830.000	36.36	17.62	53.98	68.20	-14.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

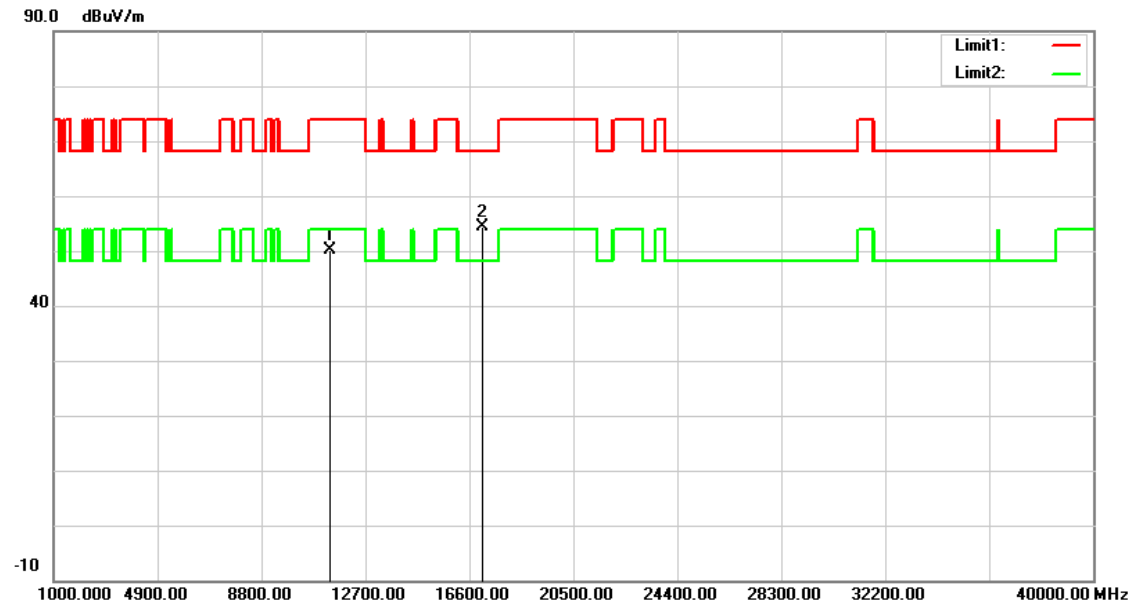


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	35.33	14.90	50.23	74.00	-23.77	peak
2	17070.000	35.52	18.91	54.43	68.20	-13.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

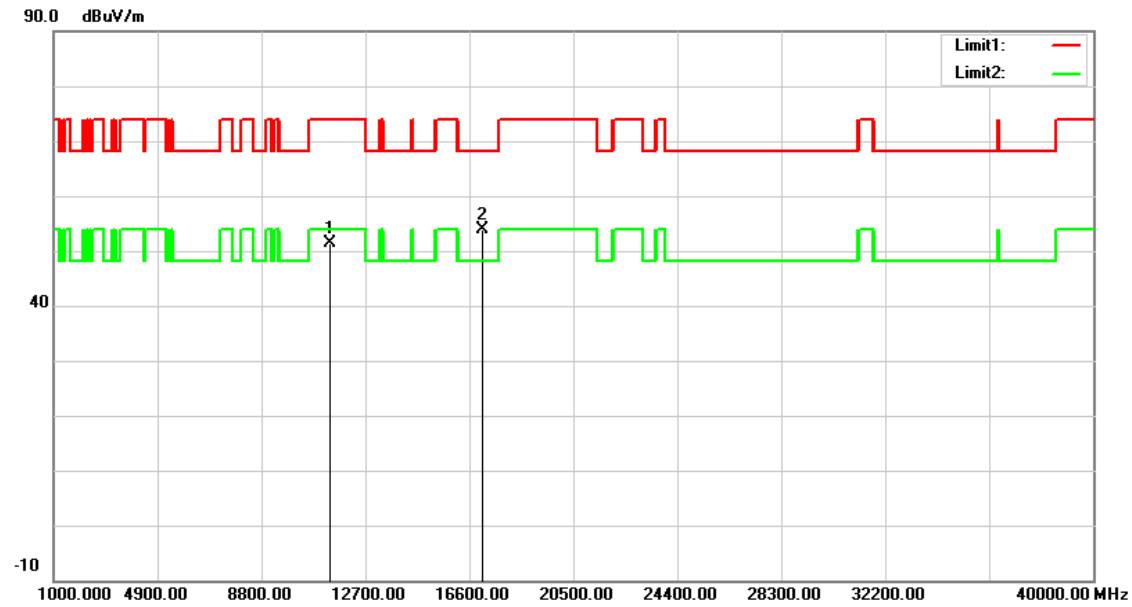


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	36.51	14.90	51.41	74.00	-22.59	peak
2	17070.000	35.01	18.91	53.92	68.20	-14.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

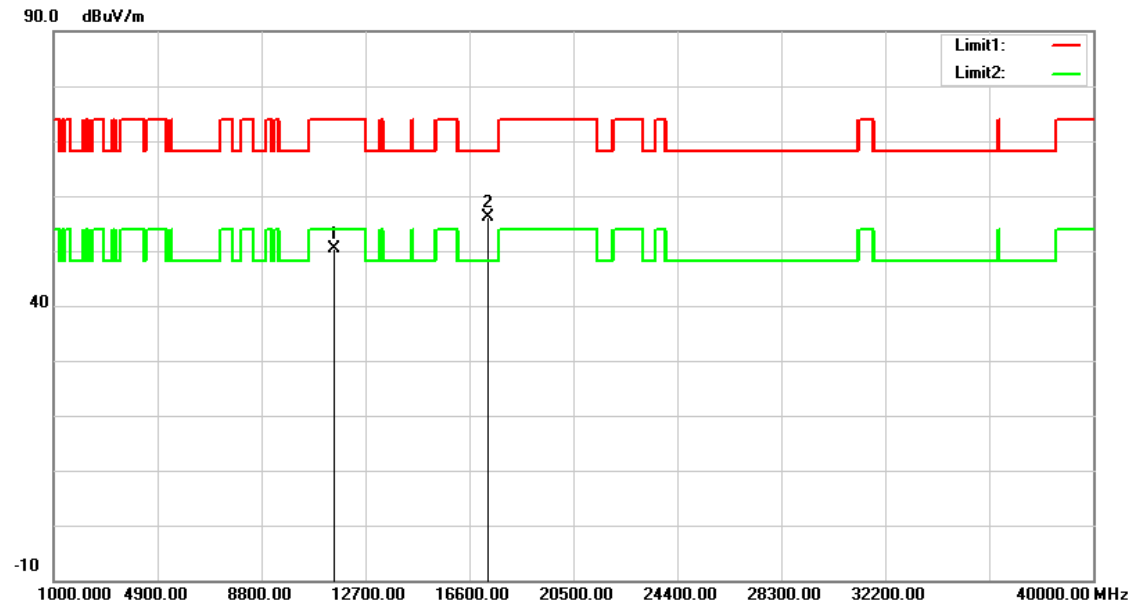


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.40	14.93	50.33	74.00	-23.67	peak
2	17325.000	35.82	20.19	56.01	68.20	-12.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

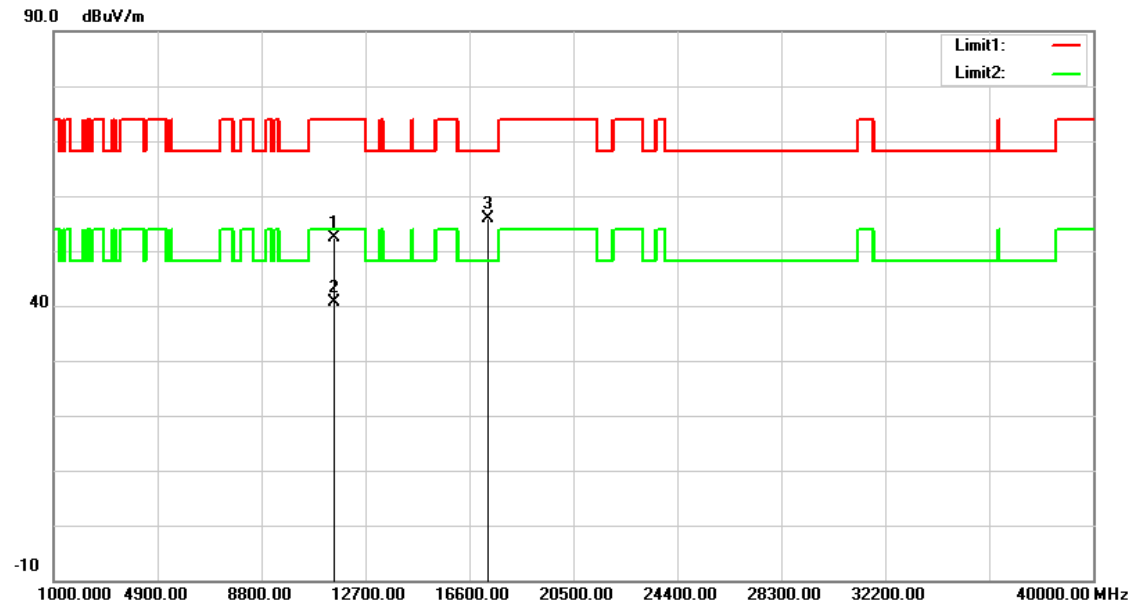


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	37.46	14.93	52.39	74.00	-21.61	peak
2	11550.000	25.73	14.93	40.66	54.00	-13.34	AVG
3	17325.000	35.77	20.19	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		
Description:			

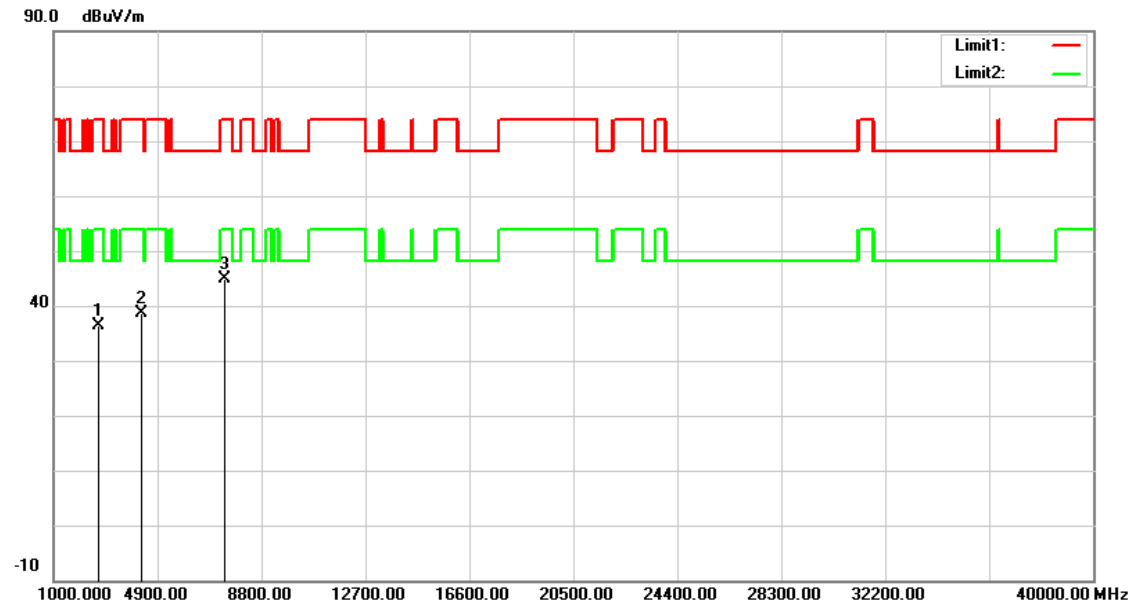


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	38.67	-2.34	36.33	74.00	-37.67	peak
2	4281.000	37.34	1.31	38.65	74.00	-35.35	peak
3	7426.000	35.87	8.90	44.77	74.00	-29.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 11		
Ant.Polar.:	Vertical		
Description:			

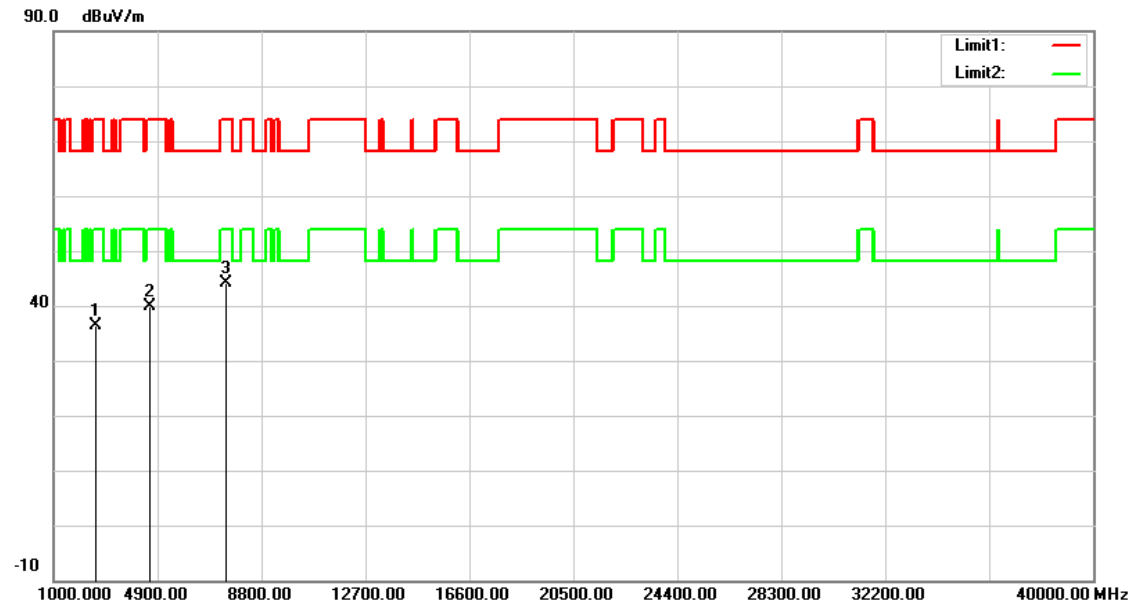

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	38.92	-2.52	36.40	74.00	-37.60	peak
2	4621.000	37.72	2.23	39.95	74.00	-34.05	peak
3	7477.000	35.19	9.06	44.25	74.00	-29.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

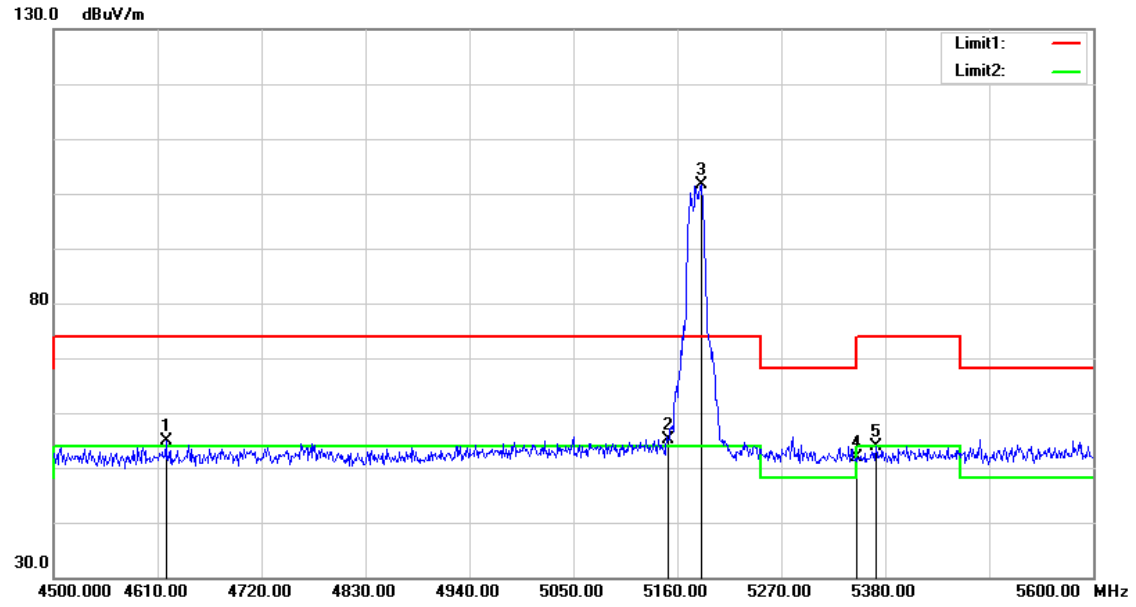


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4618.800	52.60	2.22	54.82	74.00	-19.18	peak
2	5150.000	51.77	3.35	55.12	74.00	-18.88	peak
3	5185.300	98.25	3.40	101.65	--	--	peak
4	5350.000	48.29	3.62	51.91	74.00	-22.09	peak
5	5370.100	50.15	3.65	53.80	74.00	-20.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

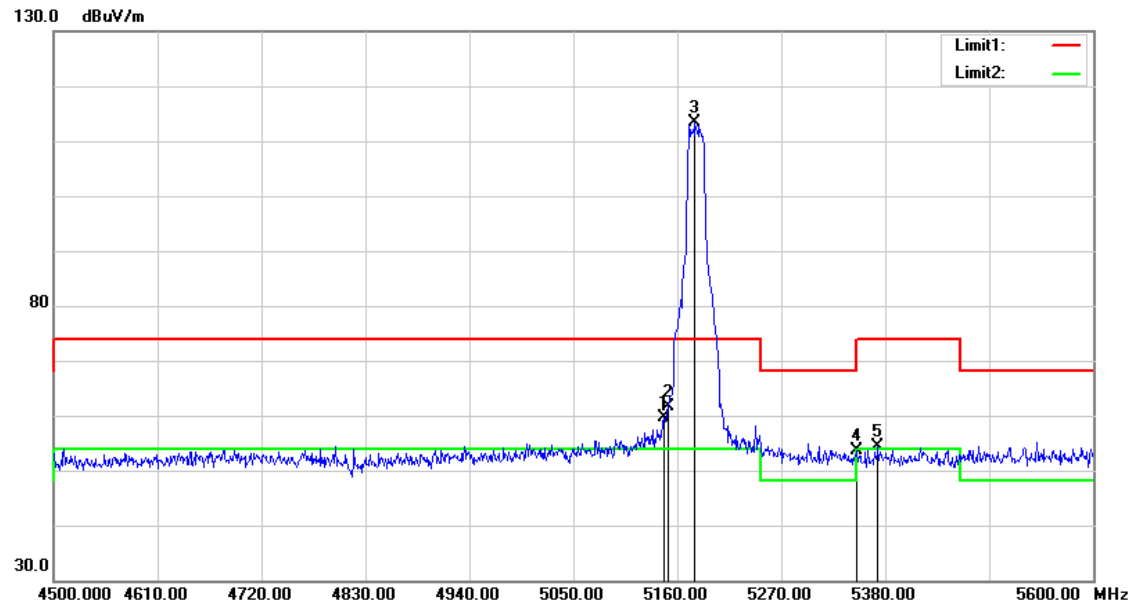


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	56.23	3.35	59.58	74.00	-14.42	peak
2	5150.000	58.29	3.35	61.64	74.00	-12.36	peak
3	5178.700	110.01	3.39	113.40	--	--	peak
4	5350.000	49.89	3.62	53.51	74.00	-20.49	peak
5	5372.300	50.74	3.65	54.39	74.00	-19.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

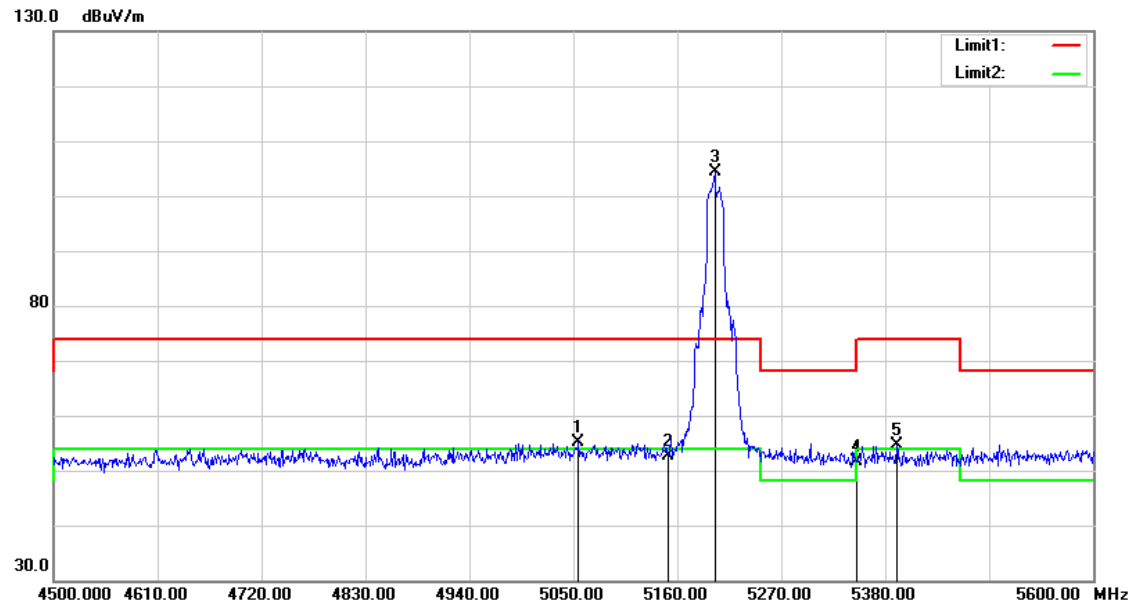


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.500	51.83	3.22	55.05	74.00	-18.95	peak
2	5150.000	49.23	3.35	52.58	74.00	-21.42	peak
3	5199.600	100.85	3.42	104.27	--	--	peak
4	5350.000	48.03	3.62	51.65	74.00	-22.35	peak
5	5392.100	50.97	3.67	54.64	74.00	-19.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

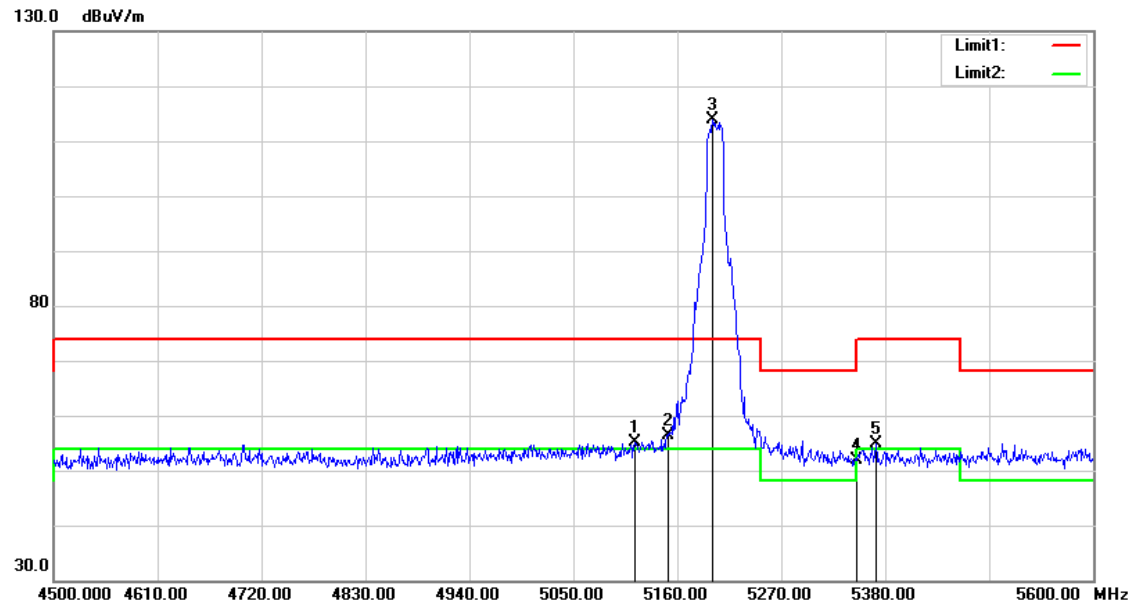


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5114.900	51.82	3.31	55.13	74.00	-18.87	peak
2	5150.000	53.04	3.35	56.39	74.00	-17.61	peak
3	5197.400	110.35	3.41	113.76	--	--	peak
4	5350.000	48.20	3.62	51.82	74.00	-22.18	peak
5	5370.100	51.12	3.65	54.77	74.00	-19.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

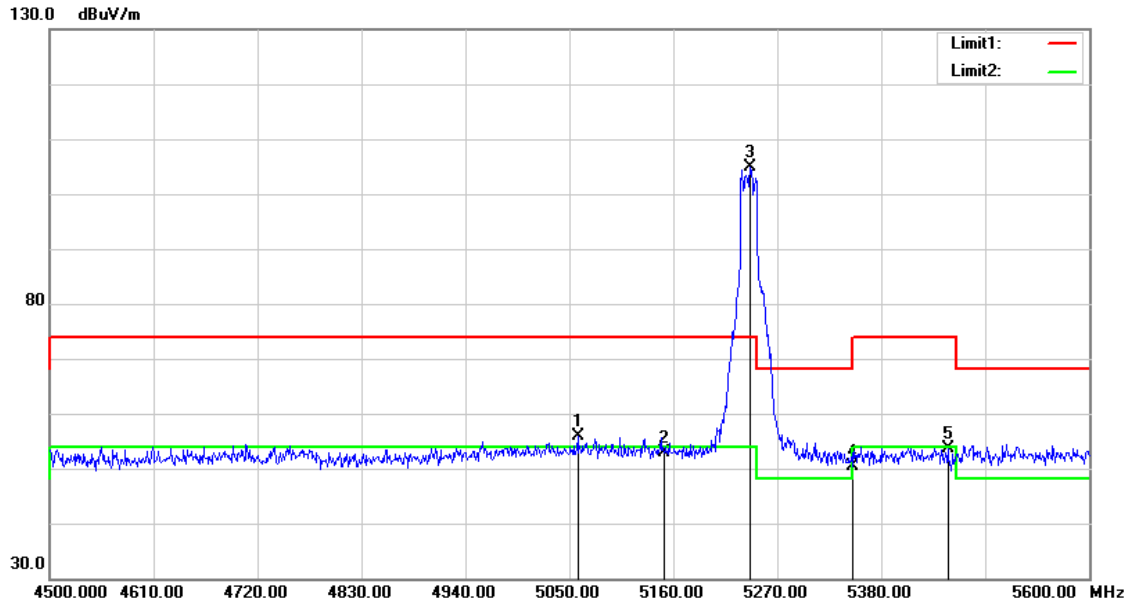


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5058.800	52.54	3.23	55.77	74.00	-18.23	peak
2	5150.000	49.48	3.35	52.83	74.00	-21.17	peak
3	5241.400	101.51	3.47	104.98	--	--	peak
4	5350.000	46.75	3.62	50.37	74.00	-23.63	peak
5	5450.400	49.99	3.75	53.74	74.00	-20.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

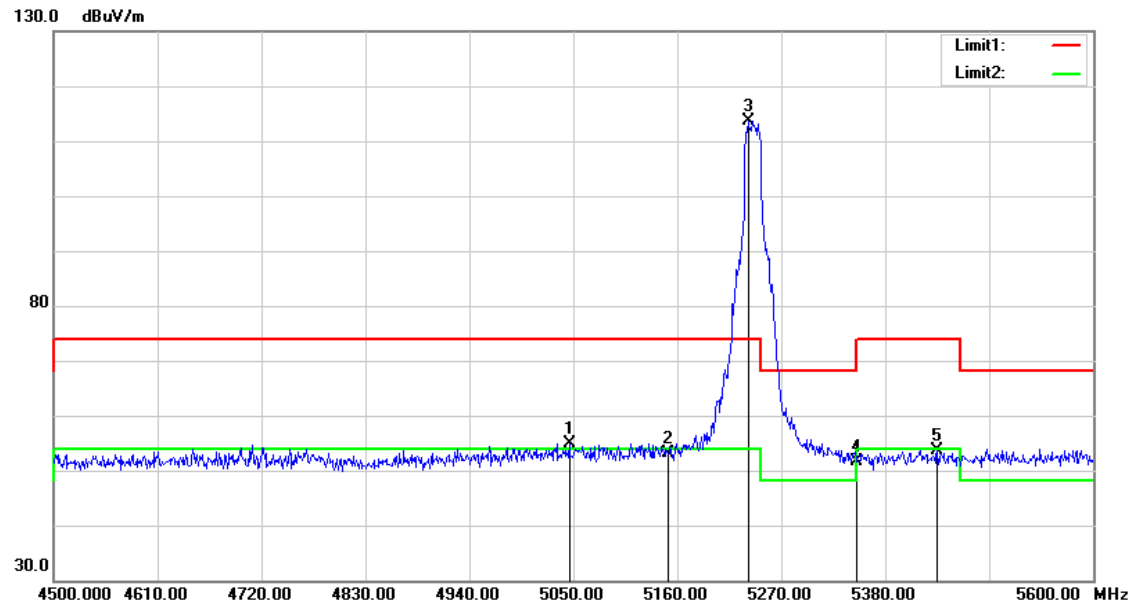


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.600	51.69	3.21	54.90	74.00	-19.10	peak
2	5150.000	49.88	3.35	53.23	74.00	-20.77	peak
3	5234.800	110.20	3.46	113.66	--	--	peak
4	5350.000	47.92	3.62	51.54	74.00	-22.46	peak
5	5435.000	49.89	3.73	53.62	74.00	-20.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

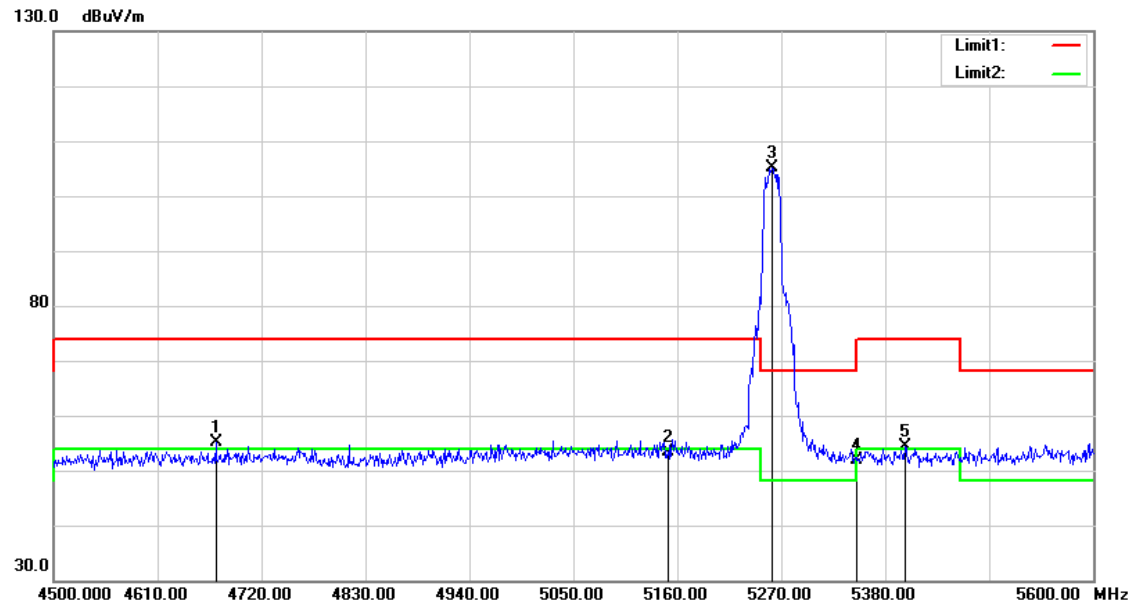


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4671.600	52.74	2.35	55.09	74.00	-18.91	peak
2	5150.000	50.03	3.35	53.38	74.00	-20.62	peak
3	5260.100	101.59	3.49	105.08	--	--	peak
4	5350.000	48.26	3.62	51.88	74.00	-22.12	peak
5	5400.900	50.59	3.68	54.27	74.00	-19.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

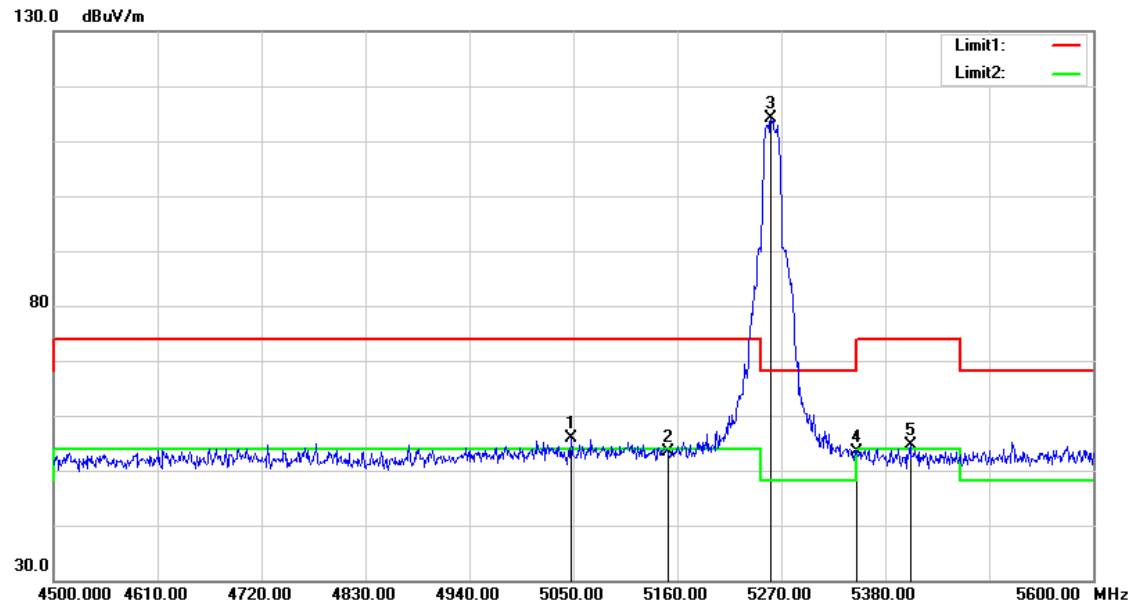


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5047.800	52.60	3.21	55.81	74.00	-18.19	peak
2	5150.000	49.91	3.35	53.26	74.00	-20.74	peak
3	5259.000	110.72	3.49	114.21	--	--	peak
4	5350.000	49.71	3.62	53.33	74.00	-20.67	peak
5	5406.400	50.93	3.70	54.63	74.00	-19.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

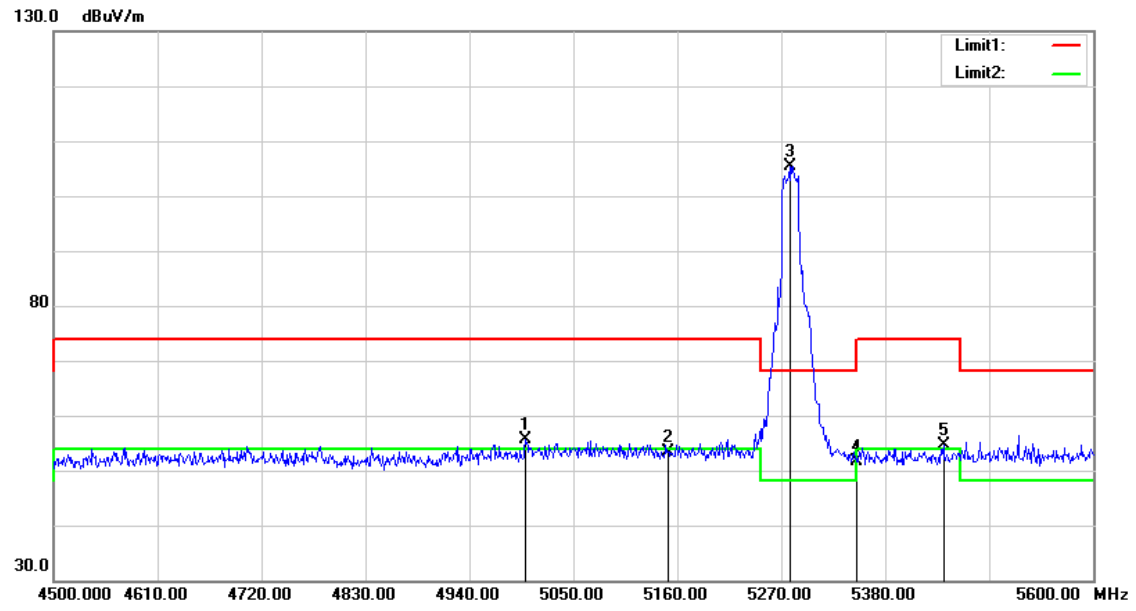


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4999.400	52.40	3.15	55.55	74.00	-18.45	peak
2	5150.000	49.97	3.35	53.32	74.00	-20.68	peak
3	5278.800	101.97	3.51	105.48	--	--	peak
4	5350.000	48.08	3.62	51.70	74.00	-22.30	peak
5	5441.600	50.80	3.73	54.53	74.00	-19.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

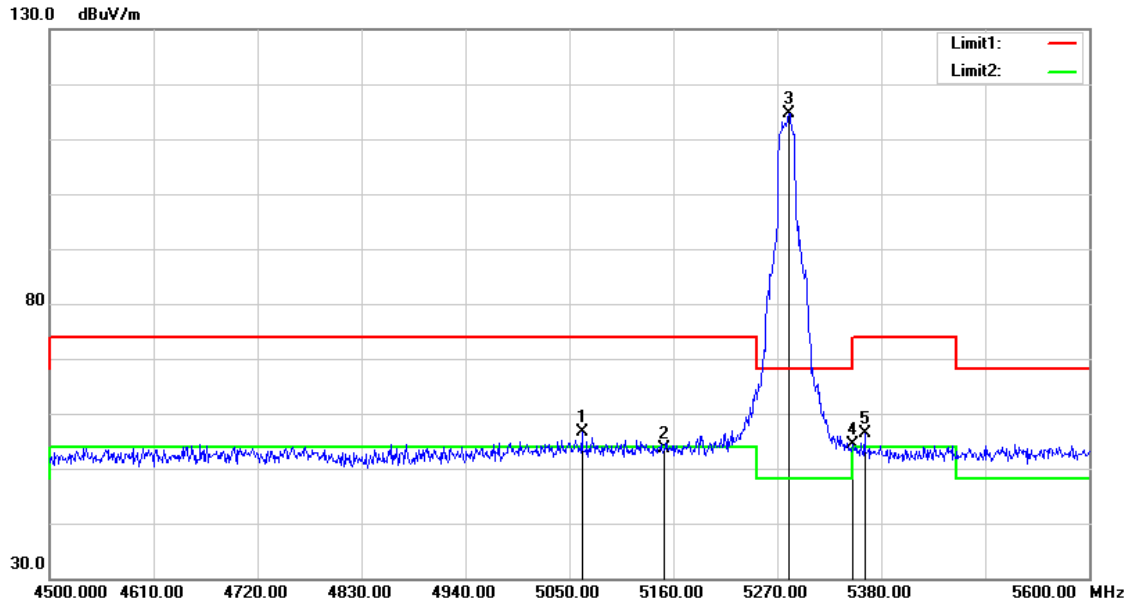


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5063.200	53.30	3.23	56.53	74.00	-17.47	peak
2	5150.000	50.32	3.35	53.67	74.00	-20.33	peak
3	5282.100	111.07	3.53	114.60	--	--	peak
4	5350.000	50.71	3.62	54.33	74.00	-19.67	peak
5	5362.400	52.68	3.63	56.31	74.00	-17.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

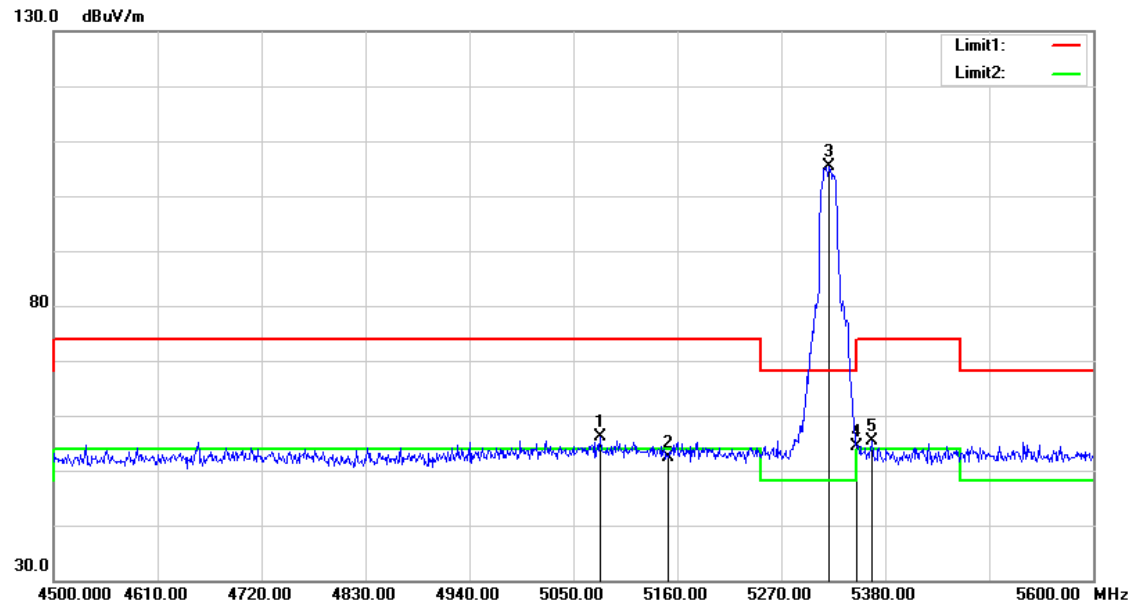


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.600	52.91	3.25	56.16	74.00	-17.84	peak
2	5150.000	49.14	3.35	52.49	74.00	-21.51	peak
3	5320.600	101.69	3.58	105.27	--	--	peak
4	5350.000	50.88	3.62	54.50	74.00	-19.50	peak
5	5365.700	51.81	3.64	55.45	74.00	-18.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

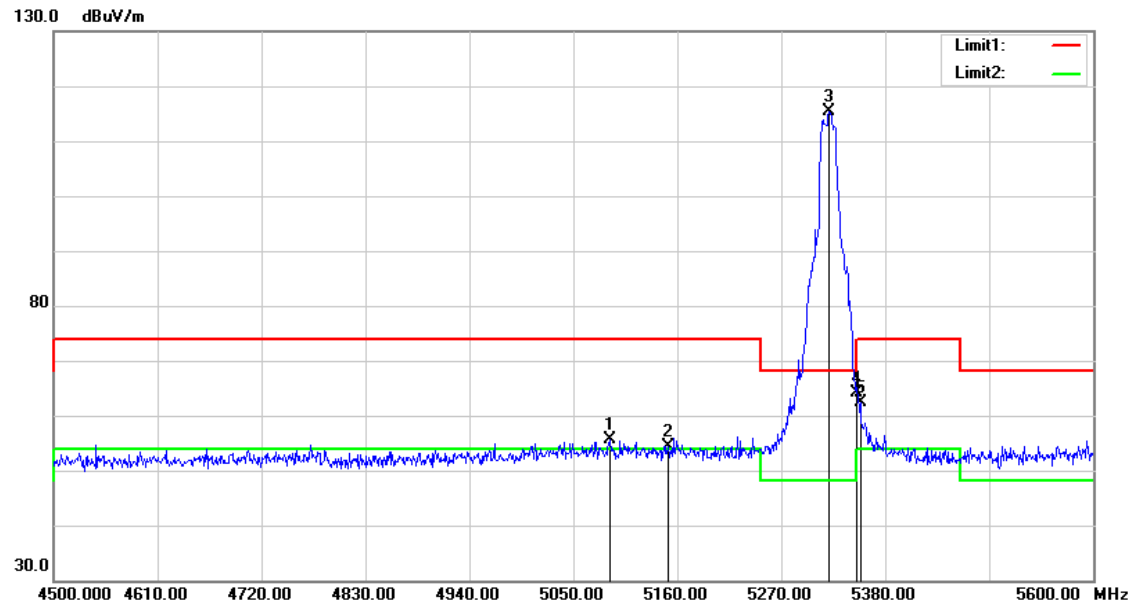


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	52.42	3.26	55.68	74.00	-18.32	peak
2	5150.000	51.03	3.35	54.38	74.00	-19.62	peak
3	5320.600	111.86	3.58	115.44	--	--	peak
4	5350.000	60.49	3.62	64.11	74.00	-9.89	peak
5	5353.600	58.68	3.62	62.30	74.00	-11.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

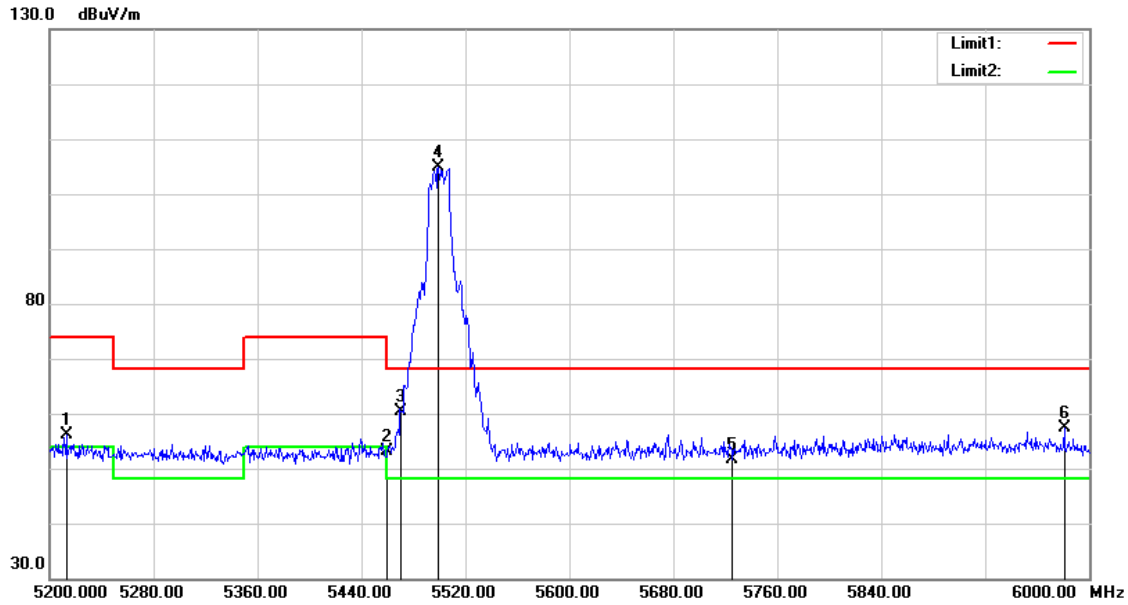


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.800	52.78	3.43	56.21	74.00	-17.79	peak
2	5460.000	49.39	3.76	53.15	74.00	-20.85	peak
3	5470.000	56.55	3.78	60.33	68.20	-7.87	peak
4	5499.200	100.97	3.81	104.78	--	--	peak
5	5725.000	47.54	4.19	51.73	68.20	-16.47	peak
6	5980.800	52.66	4.62	57.28	68.20	-10.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

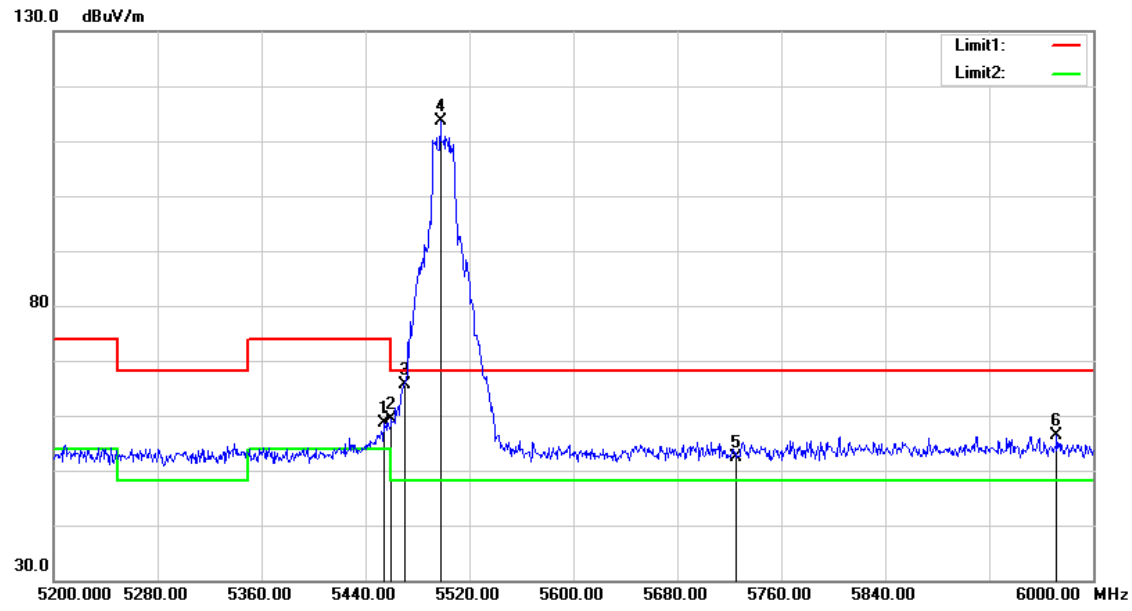


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	54.87	3.75	58.62	74.00	-15.38	peak
2	5460.000	55.54	3.76	59.30	74.00	-14.70	peak
3	5470.000	61.87	3.78	65.65	68.20	-2.55	peak
4	5497.600	109.94	3.81	113.75	--	--	peak
5	5725.000	48.08	4.19	52.27	68.20	-15.93	peak
6	5972.000	51.70	4.61	56.31	68.20	-11.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

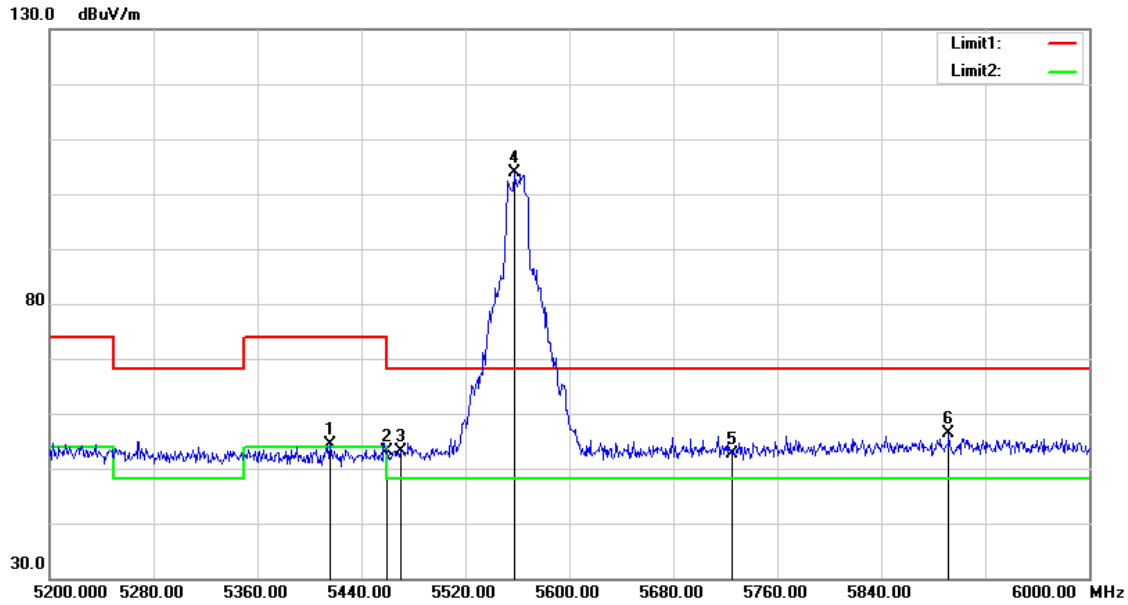


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.000	50.59	3.70	54.29	74.00	-19.71	peak
2	5460.000	49.30	3.76	53.06	74.00	-20.94	peak
3	5470.000	49.46	3.78	53.24	68.20	-14.96	peak
4	5557.600	99.95	3.91	103.86	--	--	peak
5	5725.000	48.54	4.19	52.73	68.20	-15.47	peak
6	5892.000	51.86	4.46	56.32	68.20	-11.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

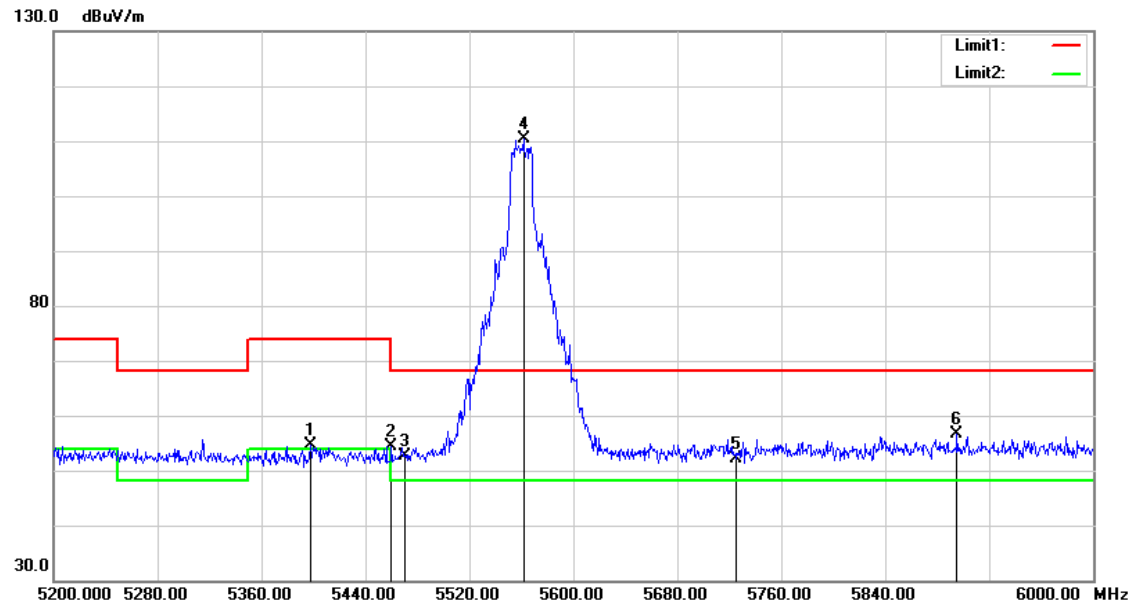


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5397.600	50.94	3.68	54.62	74.00	-19.38	peak
2	5460.000	50.68	3.76	54.44	74.00	-19.56	peak
3	5470.000	48.74	3.78	52.52	68.20	-15.68	peak
4	5561.600	106.37	3.92	110.29	--	--	peak
5	5725.000	48.00	4.19	52.19	68.20	-16.01	peak
6	5895.200	52.06	4.47	56.53	68.20	-11.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

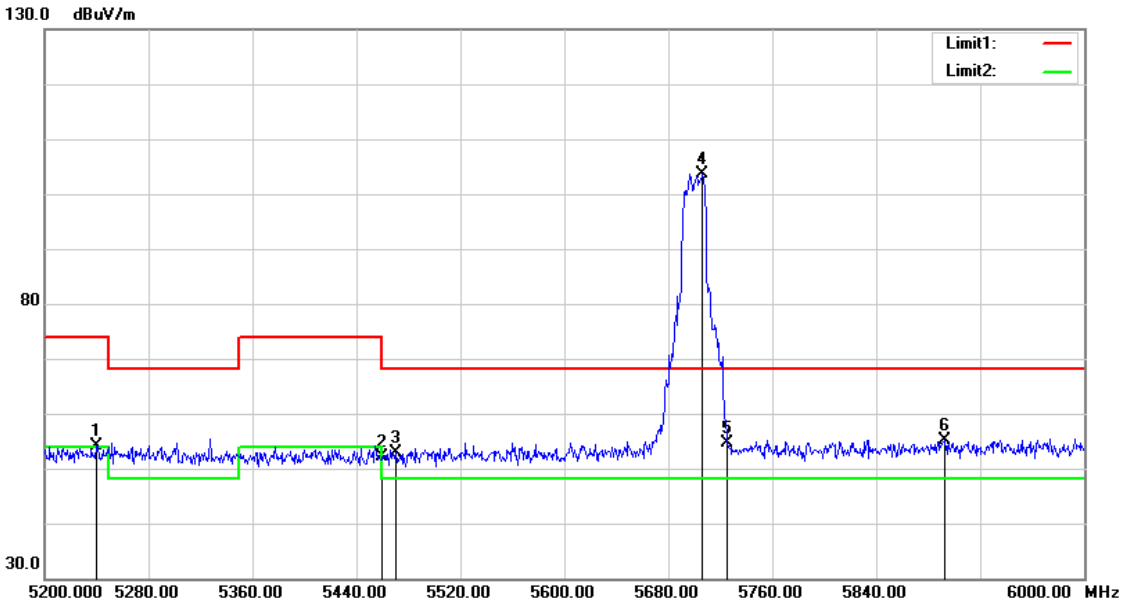


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5240.000	50.77	3.47	54.24	74.00	-19.76	peak
2	5460.000	48.35	3.76	52.11	74.00	-21.89	peak
3	5470.000	49.12	3.78	52.90	68.20	-15.30	peak
4	5706.400	99.46	4.17	103.63	--	--	peak
5	5725.000	50.53	4.19	54.72	68.20	-13.48	peak
6	5892.800	50.65	4.46	55.11	68.20	-13.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

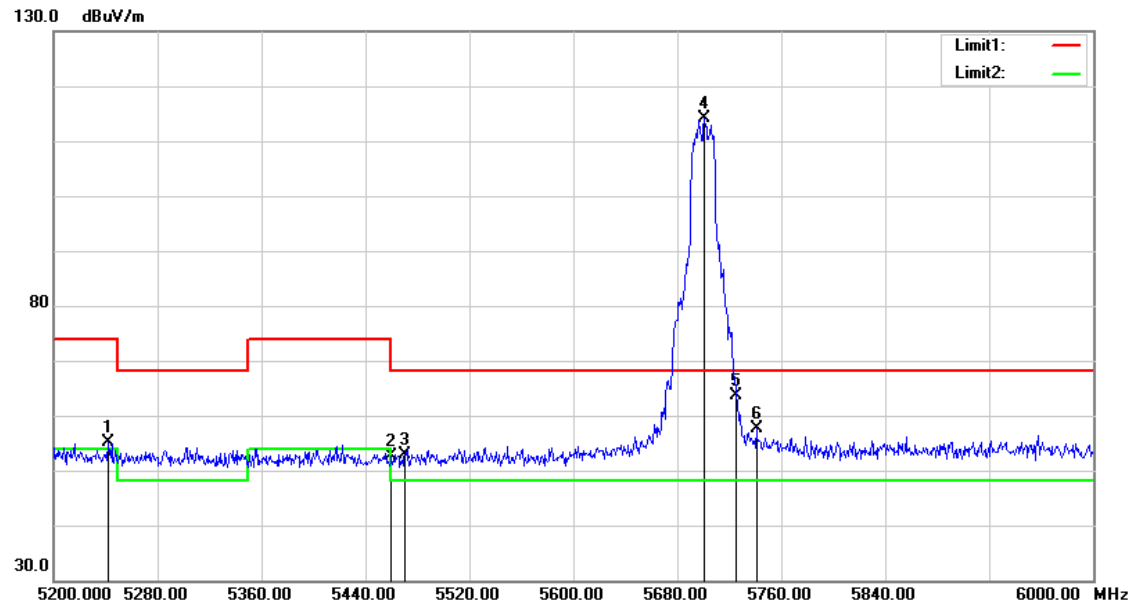


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5241.600	51.64	3.47	55.11	74.00	-18.89	peak
2	5460.000	48.84	3.76	52.60	74.00	-21.40	peak
3	5470.000	49.00	3.78	52.78	68.20	-15.42	peak
4	5700.800	110.04	4.15	114.19	--	--	peak
5	5725.000	59.53	4.19	63.72	68.20	-4.48	peak
6	5740.800	53.53	4.22	57.75	68.20	-10.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

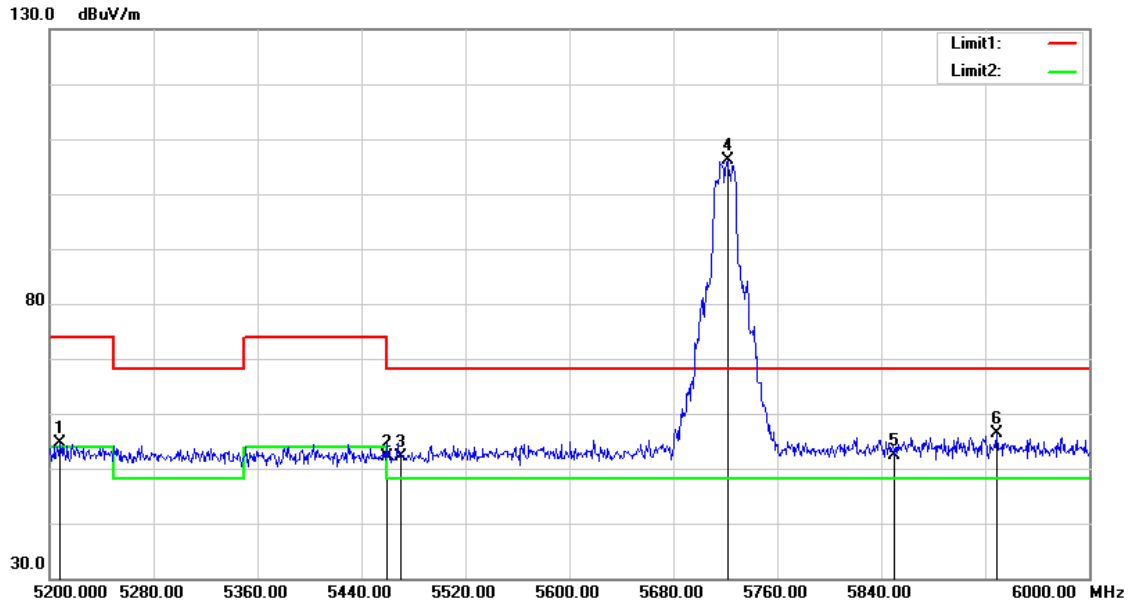


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.000	51.18	3.43	54.61	74.00	-19.39	peak
2	5460.000	48.36	3.76	52.12	74.00	-21.88	peak
3	5470.000	48.23	3.78	52.01	68.20	-16.19	peak
4	5721.600	101.91	4.19	106.10	--	--	peak
5	5850.000	48.01	4.40	52.41	68.20	-15.79	peak
6	5928.800	51.92	4.53	56.45	68.20	-11.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

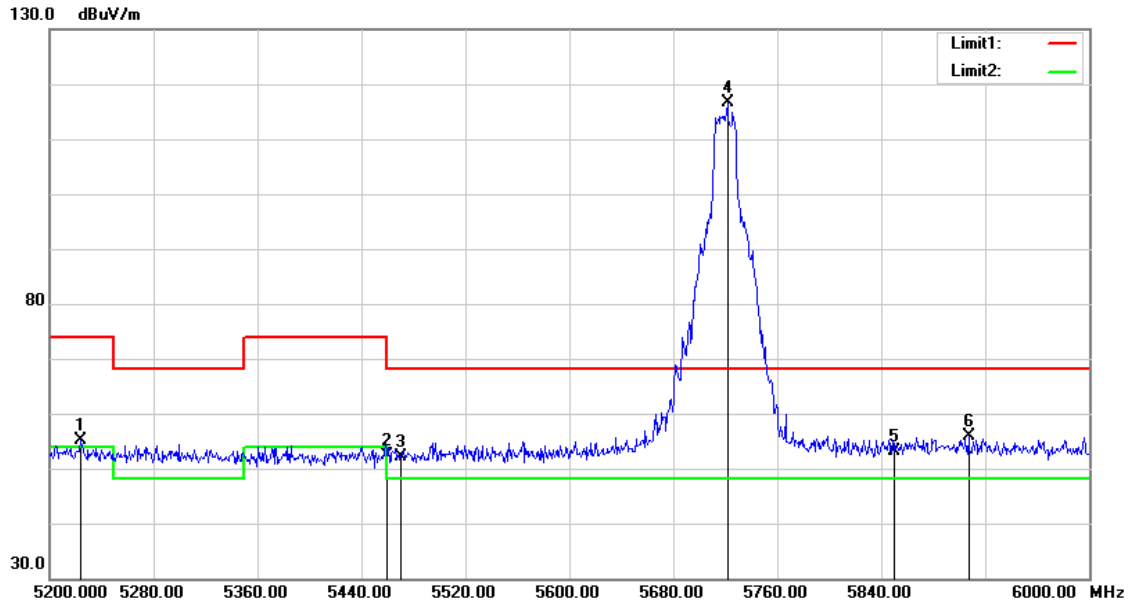


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.000	51.61	3.45	55.06	74.00	-18.94	peak
2	5460.000	48.68	3.76	52.44	74.00	-21.56	peak
3	5470.000	48.41	3.78	52.19	68.20	-16.01	peak
4	5721.600	112.42	4.19	116.61	--	--	peak
5	5850.000	48.73	4.40	53.13	68.20	-15.07	peak
6	5907.200	51.36	4.50	55.86	68.20	-12.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

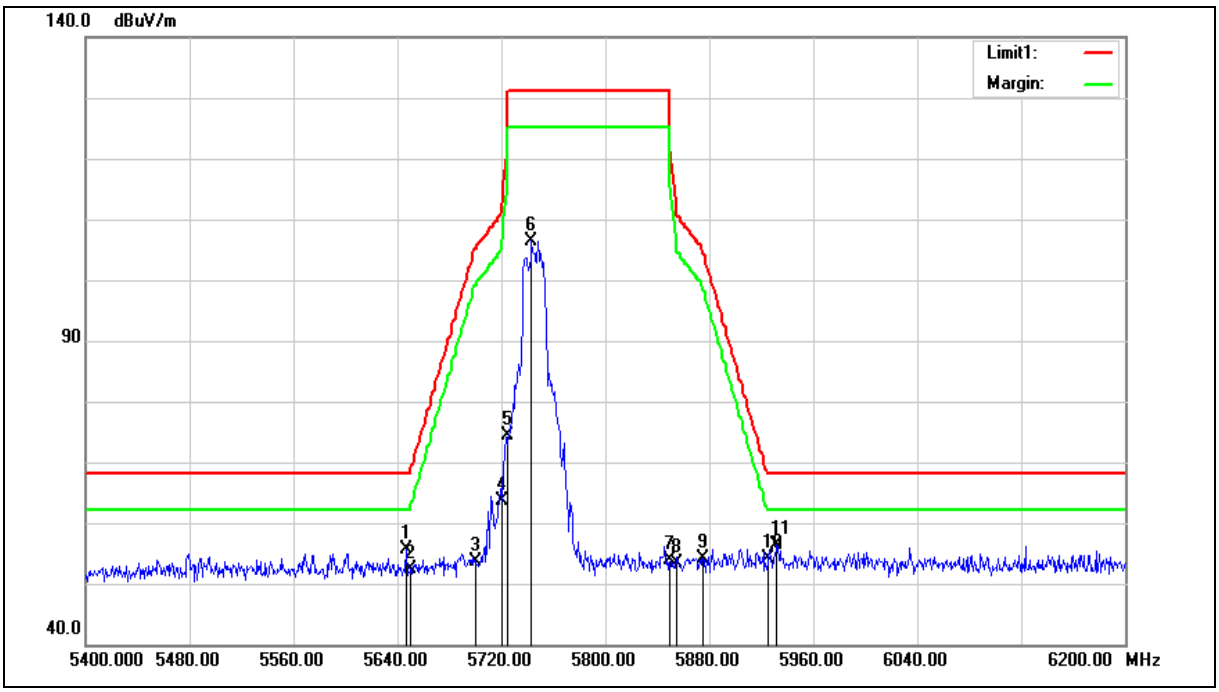

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	51.45	4.06	55.51	68.20	-12.69	peak
2	5650.000	48.34	4.06	52.40	68.20	-15.80	peak
3	5700.000	49.49	4.15	53.64	105.20	-51.56	peak
4	5720.000	59.41	4.18	63.59	110.80	-47.21	peak
5	5725.000	70.09	4.19	74.28	122.20	-47.92	peak
6	5743.200	102.28	4.22	106.50	--	--	peak
7	5850.000	49.51	4.40	53.91	122.20	-68.29	peak
8	5855.000	48.93	4.41	53.34	110.80	-57.46	peak
9	5875.000	49.67	4.44	54.11	105.20	-51.09	peak
10	5925.000	49.66	4.53	54.19	68.20	-14.01	peak
11	5932.000	51.95	4.54	56.49	68.20	-11.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

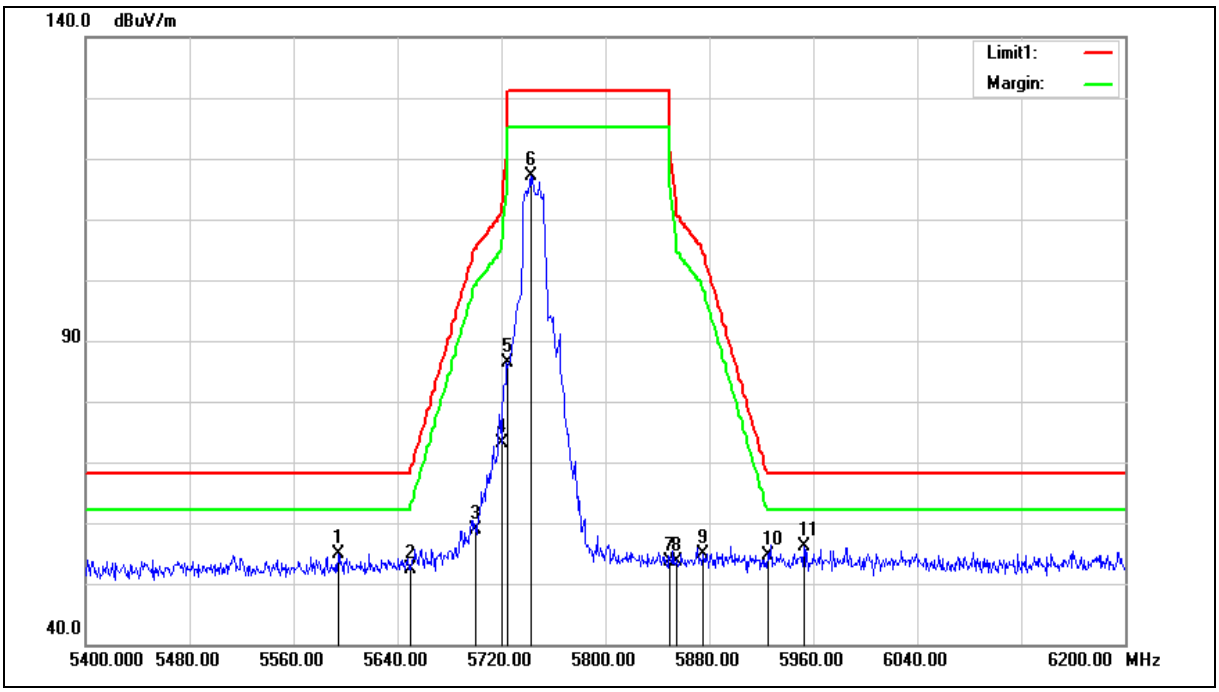

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5594.400	50.96	3.97	54.93	68.20	-13.27	peak
2	5650.000	48.43	4.06	52.49	68.20	-15.71	peak
3	5700.000	54.71	4.15	58.86	105.20	-46.34	peak
4	5720.000	69.07	4.18	73.25	110.80	-37.55	peak
5	5725.000	82.10	4.19	86.29	122.20	-35.91	peak
6	5742.400	112.88	4.22	117.10	--	--	peak
7	5850.000	49.24	4.40	53.64	122.20	-68.56	peak
8	5855.000	49.24	4.41	53.65	110.80	-57.15	peak
9	5875.000	50.44	4.44	54.88	105.20	-50.32	peak
10	5925.000	50.11	4.53	54.64	68.20	-13.56	peak
11	5952.800	51.49	4.57	56.06	68.20	-12.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

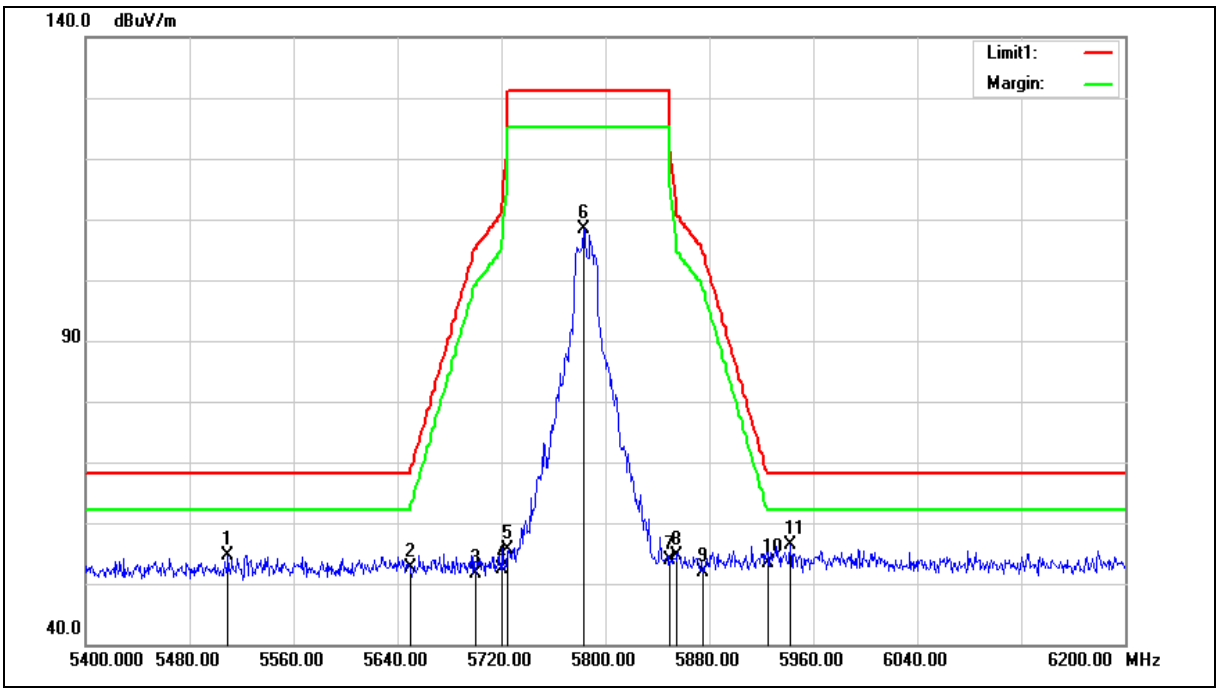

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5509.600	50.88	3.83	54.71	68.20	-13.49	peak
2	5650.000	48.48	4.06	52.54	68.20	-15.66	peak
3	5700.000	47.51	4.15	51.66	105.20	-53.54	peak
4	5720.000	48.08	4.18	52.26	110.80	-58.54	peak
5	5725.000	51.37	4.19	55.56	122.20	-66.64	peak
6	5783.200	104.07	4.29	108.36	--	--	peak
7	5850.000	49.40	4.40	53.80	122.20	-68.40	peak
8	5855.000	50.18	4.41	54.59	110.80	-56.21	peak
9	5875.000	47.50	4.44	51.94	105.20	-53.26	peak
10	5925.000	48.84	4.53	53.37	68.20	-14.83	peak
11	5942.400	51.71	4.56	56.27	68.20	-11.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

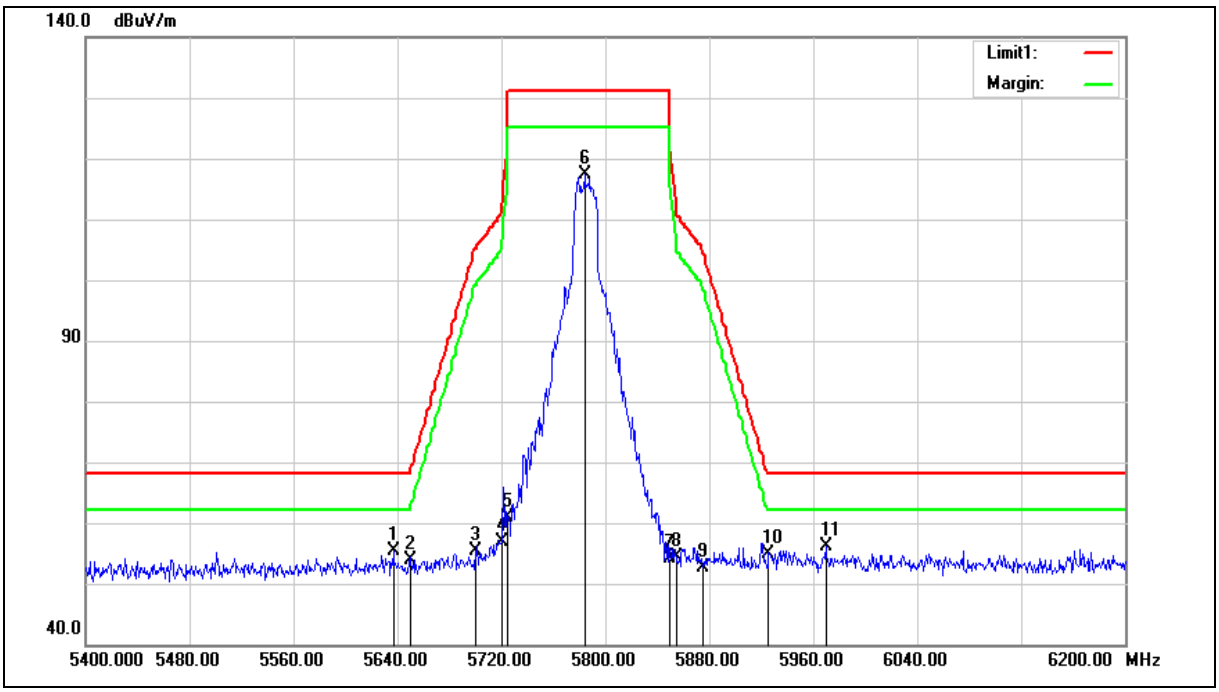

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.800	51.31	4.04	55.35	68.20	-12.85	peak
2	5650.000	49.81	4.06	53.87	68.20	-14.33	peak
3	5700.000	51.12	4.15	55.27	105.20	-49.93	peak
4	5720.000	52.72	4.18	56.90	110.80	-53.90	peak
5	5725.000	56.61	4.19	60.80	122.20	-61.40	peak
6	5784.000	112.97	4.29	117.26	--	--	peak
7	5850.000	49.80	4.40	54.20	122.20	-68.00	peak
8	5855.000	50.01	4.41	54.42	110.80	-56.38	peak
9	5875.000	48.14	4.44	52.58	105.20	-52.62	peak
10	5925.000	50.47	4.53	55.00	68.20	-13.20	peak
11	5969.600	51.58	4.60	56.18	68.20	-12.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

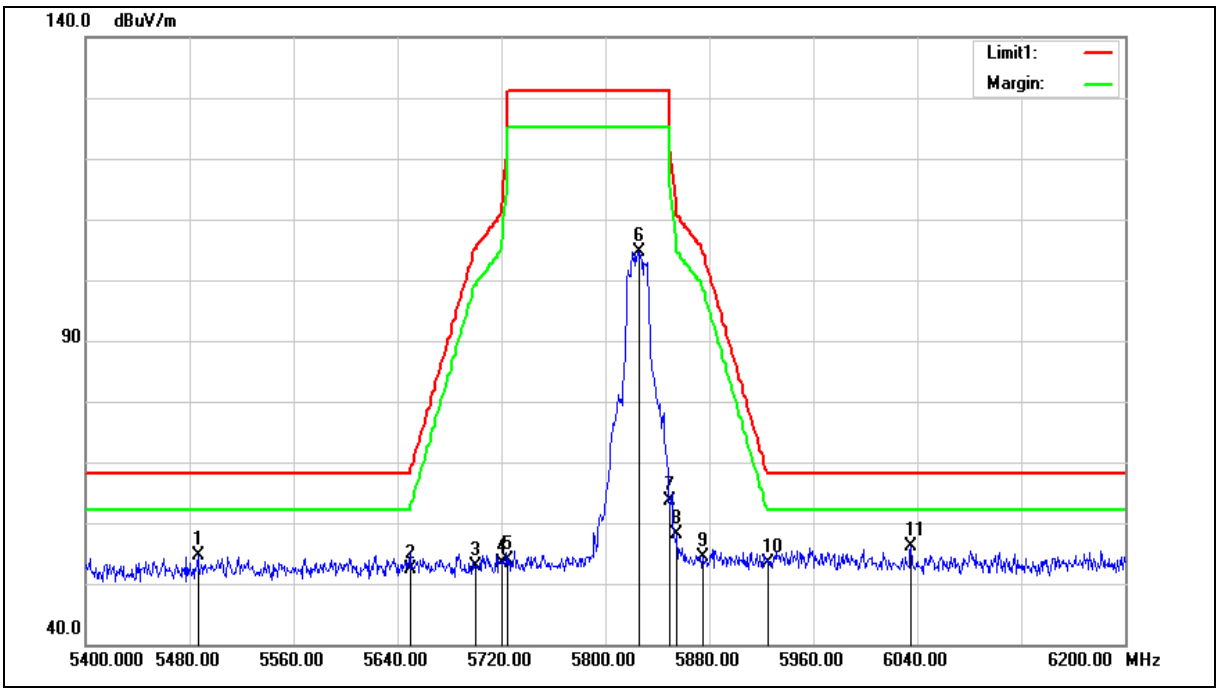

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5486.400	50.95	3.79	54.74	68.20	-13.46	peak
2	5650.000	48.28	4.06	52.34	68.20	-15.86	peak
3	5700.000	48.67	4.15	52.82	105.20	-52.38	peak
4	5720.000	49.24	4.18	53.42	110.80	-57.38	peak
5	5725.000	49.72	4.19	53.91	122.20	-68.29	peak
6	5825.600	100.39	4.36	104.75	--	--	peak
7	5850.000	59.16	4.40	63.56	122.20	-58.64	peak
8	5855.000	53.69	4.41	58.10	110.80	-52.70	peak
9	5875.000	49.89	4.44	54.33	105.20	-50.87	peak
10	5925.000	48.84	4.53	53.37	68.20	-14.83	peak
11	6035.200	51.25	4.77	56.02	68.20	-12.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

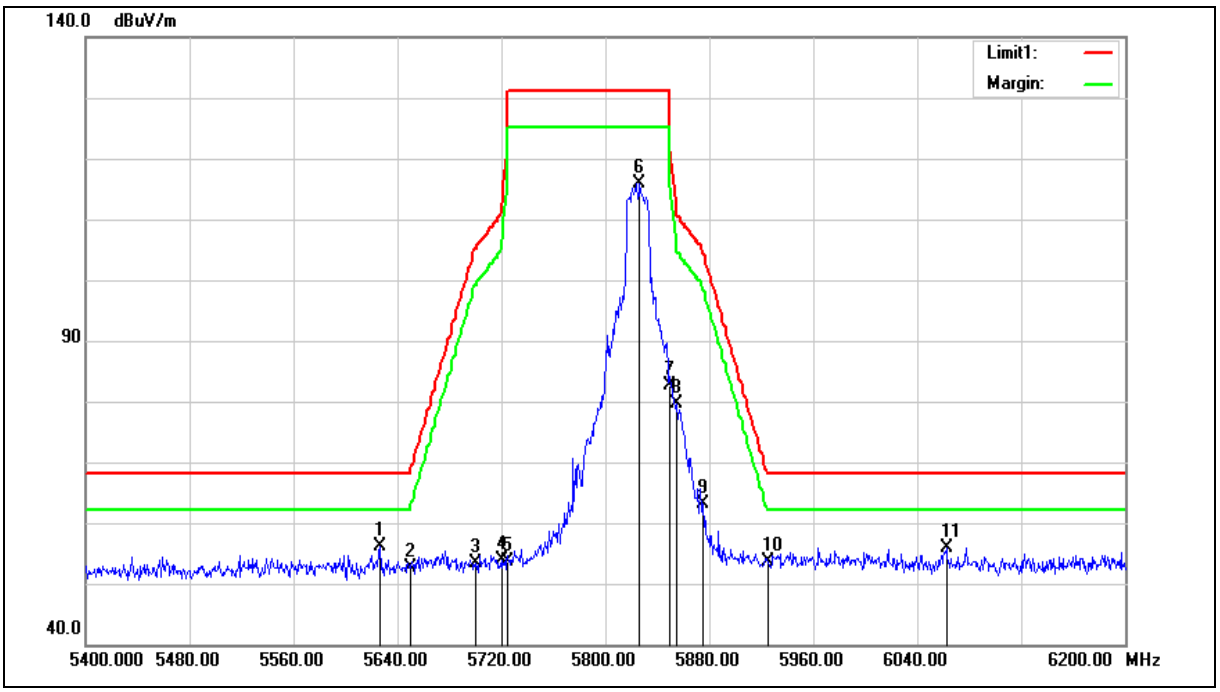

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5626.400	52.11	4.02	56.13	68.20	-12.07	peak
2	5650.000	48.47	4.06	52.53	68.20	-15.67	peak
3	5700.000	49.16	4.15	53.31	105.20	-51.89	peak
4	5720.000	49.60	4.18	53.78	110.80	-57.02	peak
5	5725.000	49.33	4.19	53.52	122.20	-68.68	peak
6	5826.400	111.63	4.36	115.99	--	--	peak
7	5850.000	78.24	4.40	82.64	122.20	-39.56	peak
8	5855.000	75.13	4.41	79.54	110.80	-31.26	peak
9	5875.000	58.57	4.44	63.01	105.20	-42.19	peak
10	5925.000	49.19	4.53	53.72	68.20	-14.48	peak
11	6062.400	51.13	4.86	55.99	68.20	-12.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

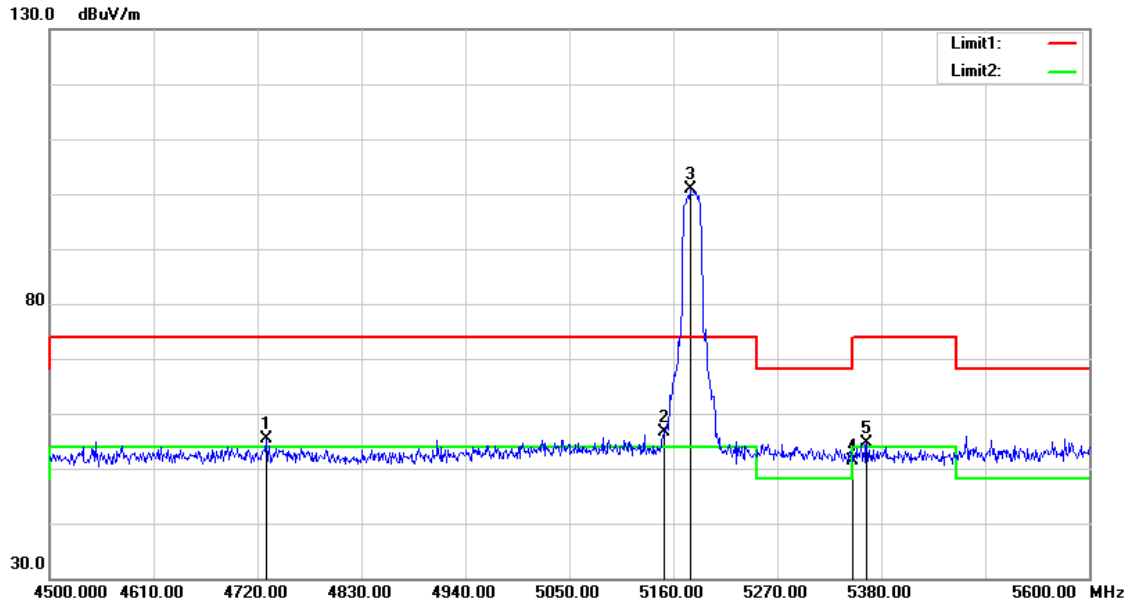


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4729.900	52.98	2.49	55.47	74.00	-18.53	peak
2	5150.000	53.22	3.35	56.57	74.00	-17.43	peak
3	5177.600	97.46	3.39	100.85	--	--	peak
4	5350.000	47.77	3.62	51.39	74.00	-22.61	peak
5	5364.600	51.10	3.64	54.74	74.00	-19.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

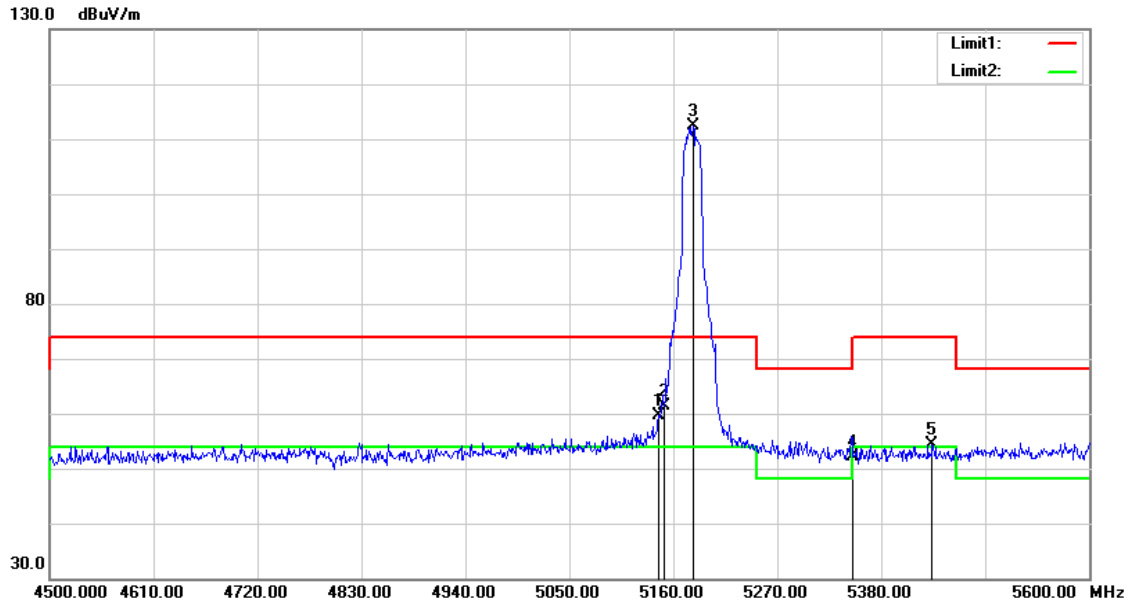


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.600	56.24	3.35	59.59	74.00	-14.41	peak
2	5150.000	57.95	3.35	61.30	74.00	-12.70	peak
3	5180.900	108.99	3.39	112.38	--	--	peak
4	5350.000	48.62	3.62	52.24	74.00	-21.76	peak
5	5433.900	50.55	3.73	54.28	74.00	-19.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

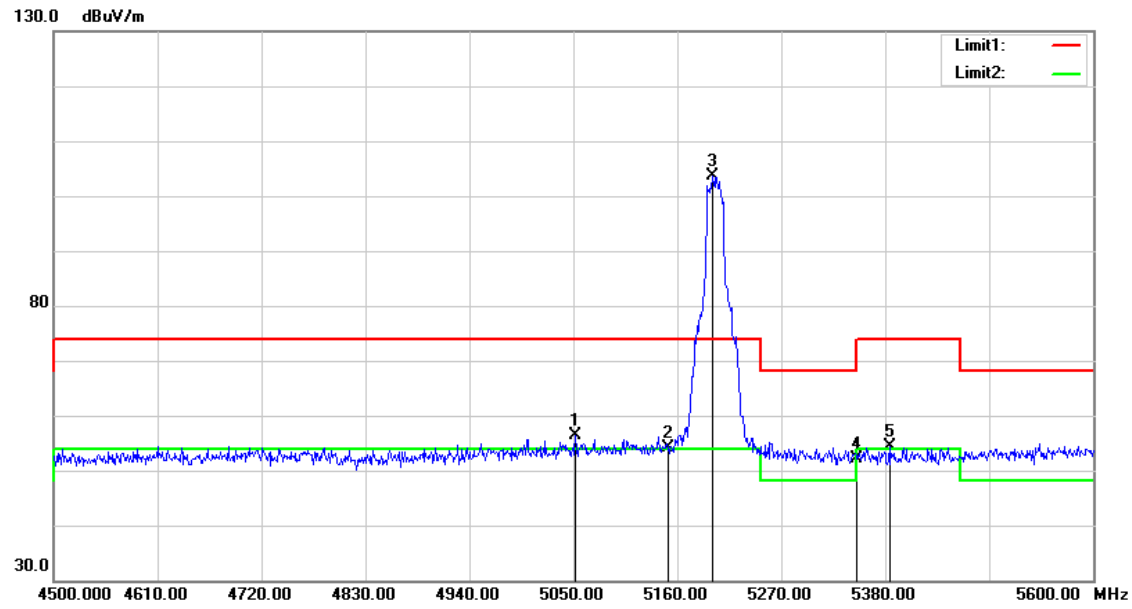


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.200	53.11	3.22	56.33	74.00	-17.67	peak
2	5150.000	50.86	3.35	54.21	74.00	-19.79	peak
3	5197.400	100.26	3.41	103.67	--	--	peak
4	5350.000	48.52	3.62	52.14	74.00	-21.86	peak
5	5384.400	50.81	3.66	54.47	74.00	-19.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

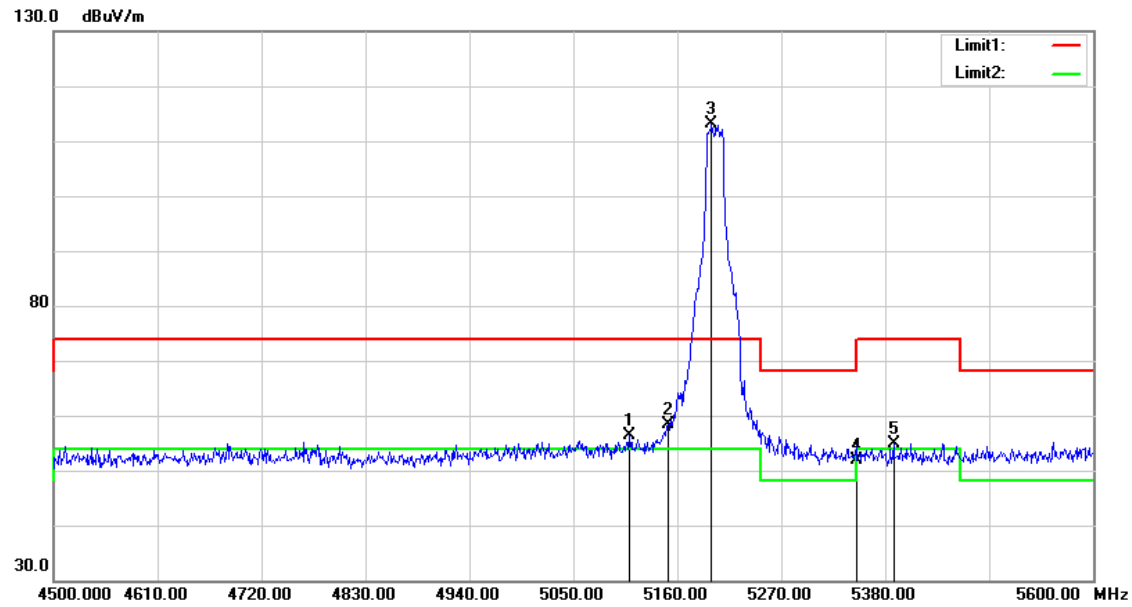


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5109.400	53.01	3.30	56.31	74.00	-17.69	peak
2	5150.000	55.00	3.35	58.35	74.00	-15.65	peak
3	5196.300	109.73	3.41	113.14	--	--	peak
4	5350.000	48.31	3.62	51.93	74.00	-22.07	peak
5	5388.800	51.19	3.67	54.86	74.00	-19.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

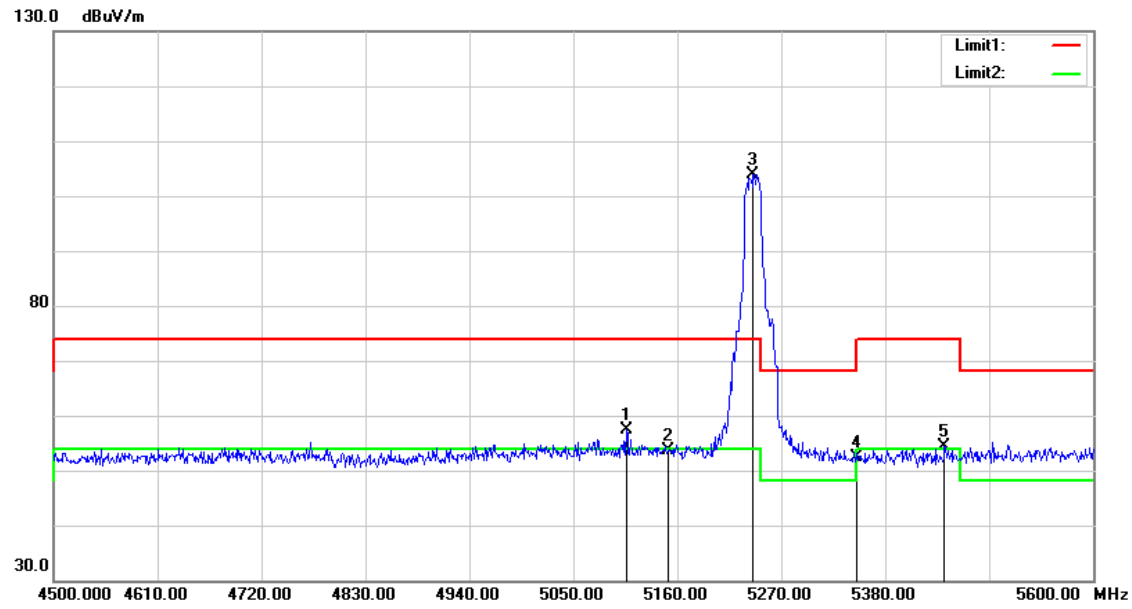


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5106.100	54.14	3.29	57.43	74.00	-16.57	peak
2	5150.000	50.34	3.35	53.69	74.00	-20.31	peak
3	5240.300	100.42	3.47	103.89	--	--	peak
4	5350.000	48.76	3.62	52.38	74.00	-21.62	peak
5	5442.700	50.74	3.73	54.47	74.00	-19.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

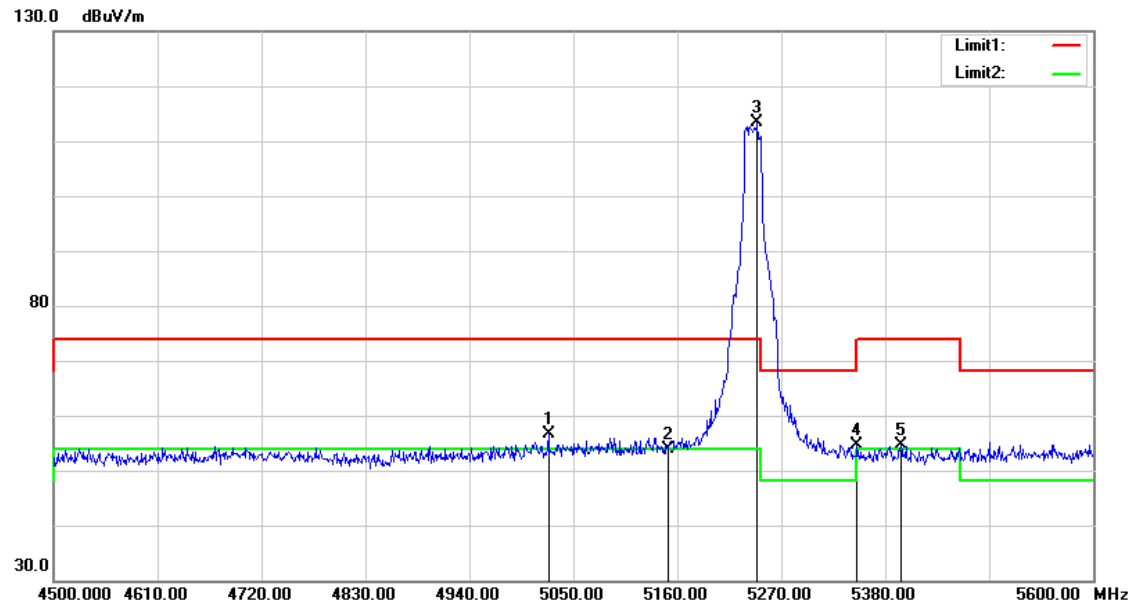


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.600	53.33	3.18	56.51	74.00	-17.49	peak
2	5150.000	50.53	3.35	53.88	74.00	-20.12	peak
3	5244.700	109.87	3.48	113.35	--	--	peak
4	5350.000	51.11	3.62	54.73	74.00	-19.27	peak
5	5396.500	50.95	3.68	54.63	74.00	-19.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.--

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

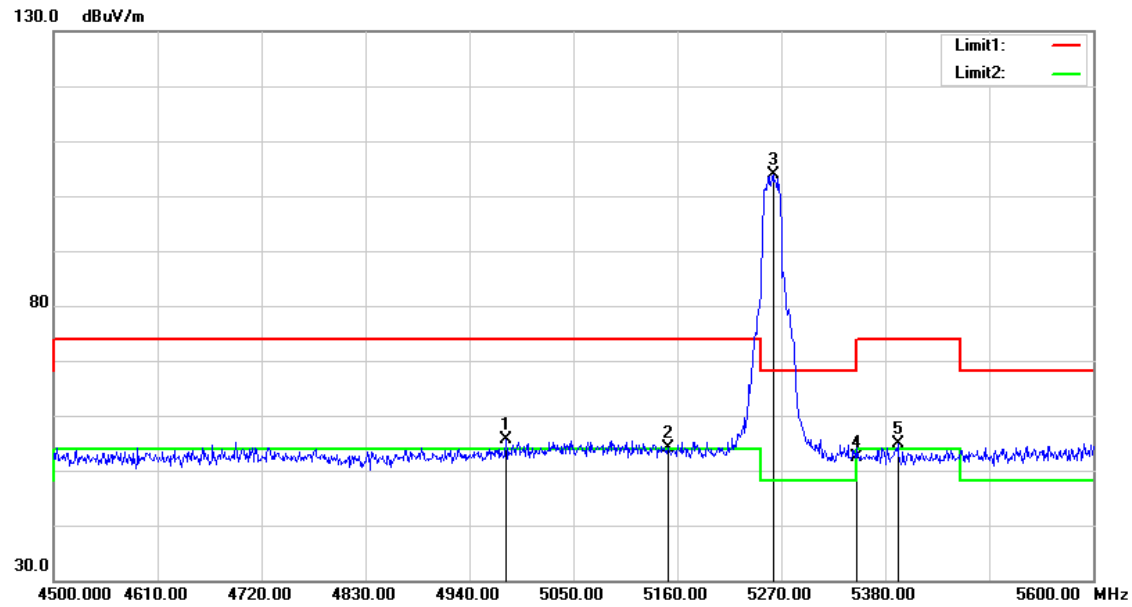


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4978.500	52.61	3.10	55.71	74.00	-18.29	peak
2	5150.000	50.70	3.35	54.05	74.00	-19.95	peak
3	5261.200	100.33	3.50	103.83	--	--	peak
4	5350.000	48.83	3.62	52.45	74.00	-21.55	peak
5	5393.200	51.18	3.67	54.85	74.00	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

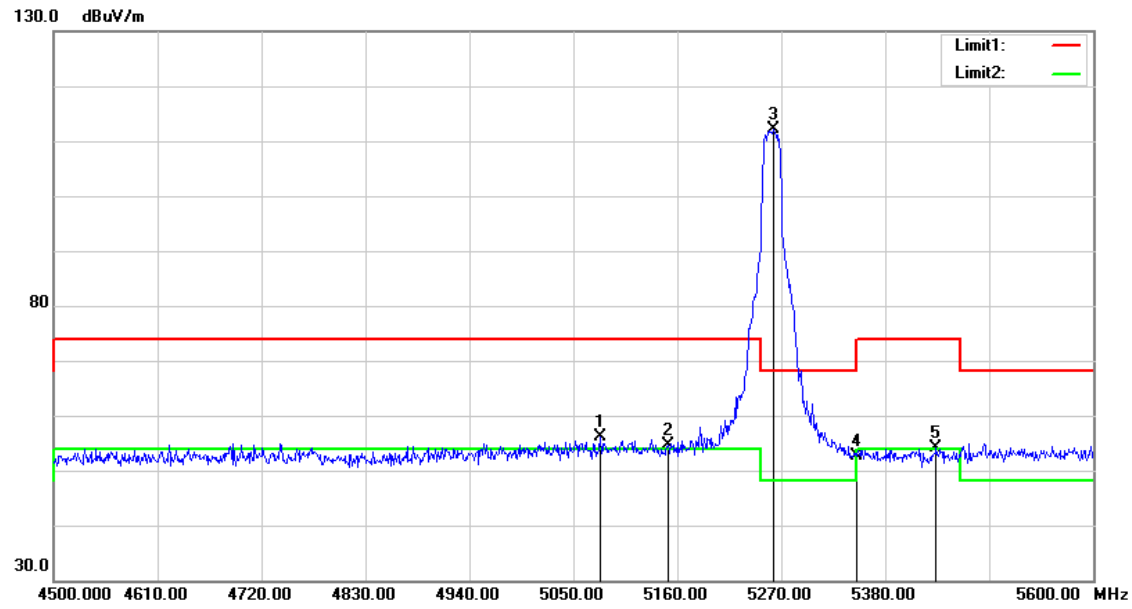


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.600	52.83	3.25	56.08	74.00	-17.92	peak
2	5150.000	51.24	3.35	54.59	74.00	-19.41	peak
3	5262.300	108.56	3.50	112.06	--	--	peak
4	5350.000	48.94	3.62	52.56	74.00	-21.44	peak
5	5433.900	50.40	3.73	54.13	74.00	-19.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

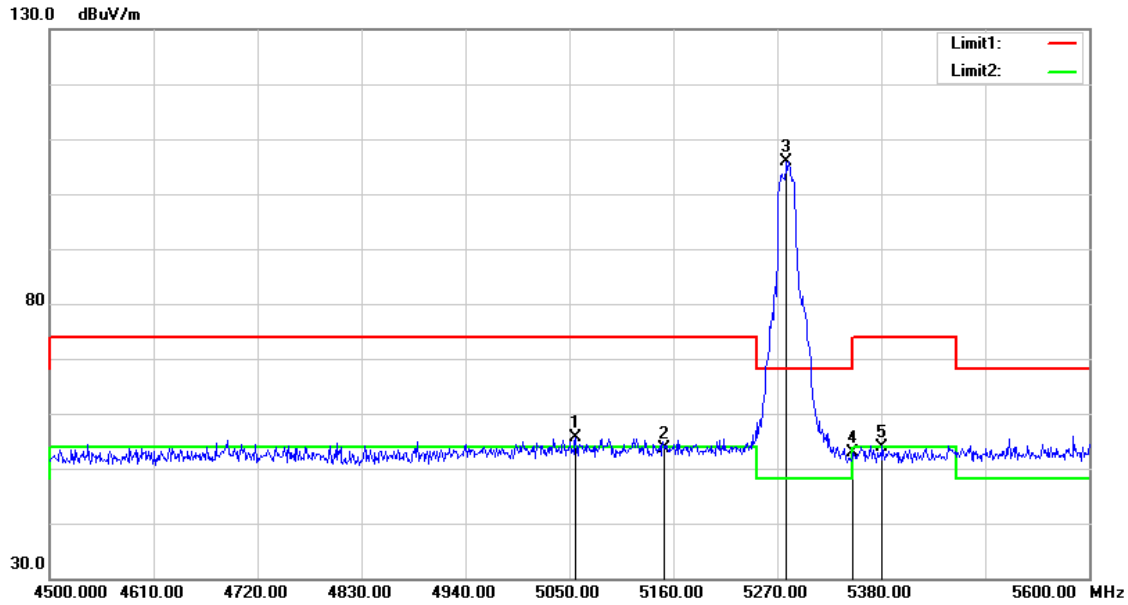


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5056.600	52.51	3.23	55.74	74.00	-18.26	peak
2	5150.000	50.30	3.35	53.65	74.00	-20.35	peak
3	5279.900	102.46	3.51	105.97	--	--	peak
4	5350.000	49.37	3.62	52.99	74.00	-21.01	peak
5	5381.100	50.35	3.65	54.00	74.00	-20.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

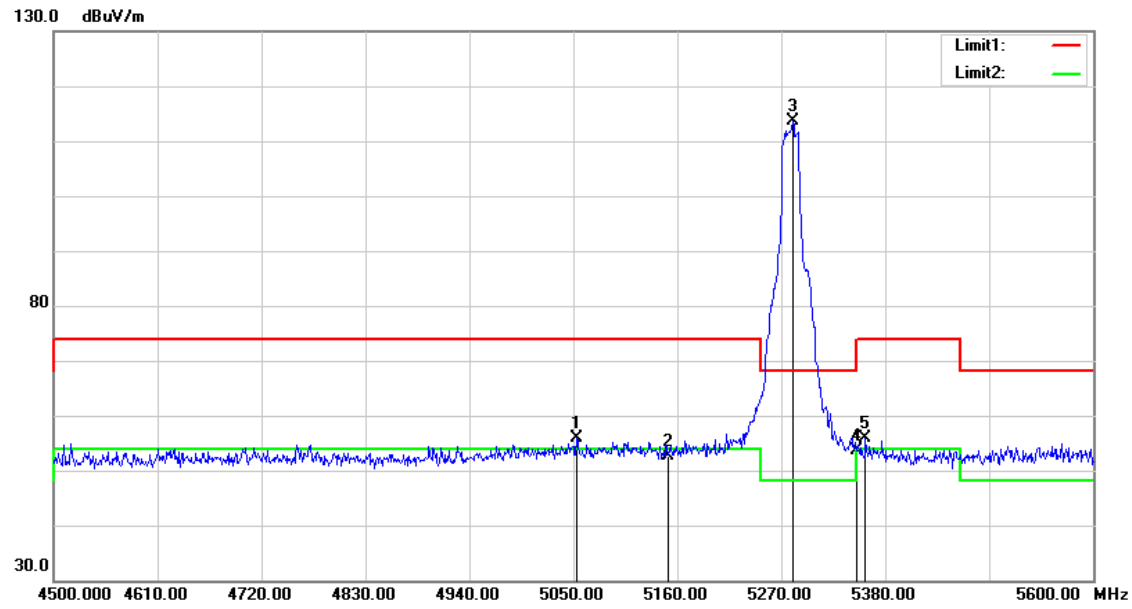


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	52.66	3.22	55.88	74.00	-18.12	peak
2	5150.000	49.40	3.35	52.75	74.00	-21.25	peak
3	5282.100	110.19	3.53	113.72	--	--	peak
4	5350.000	49.99	3.62	53.61	74.00	-20.39	peak
5	5359.100	52.34	3.63	55.97	74.00	-18.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

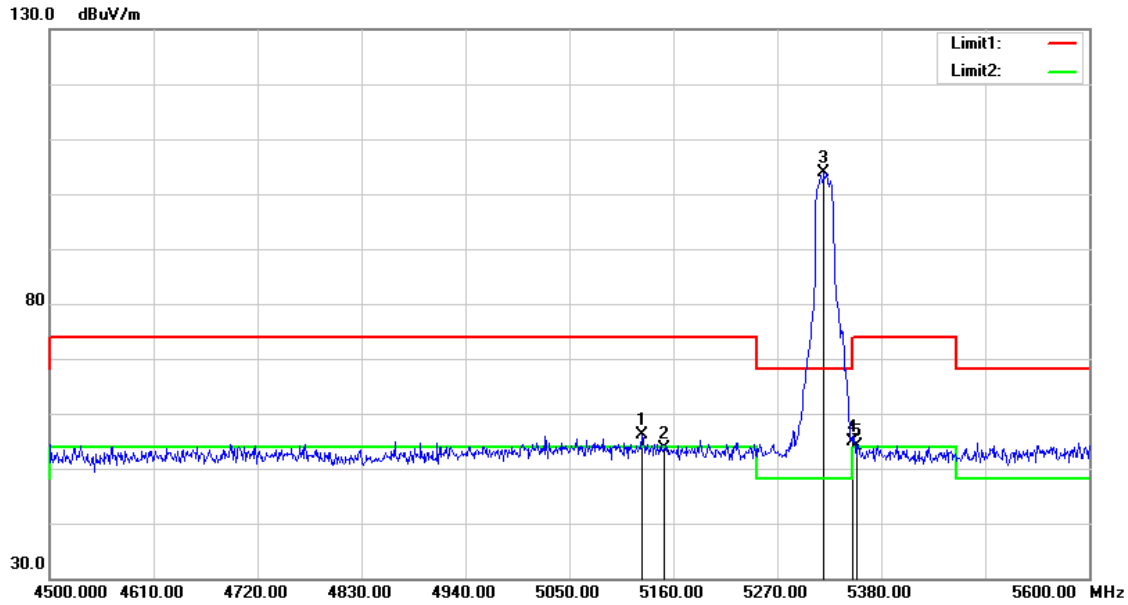


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.000	52.81	3.32	56.13	74.00	-17.87	peak
2	5150.000	50.28	3.35	53.63	74.00	-20.37	peak
3	5319.500	100.19	3.58	103.77	--	--	peak
4	5350.000	51.37	3.62	54.99	74.00	-19.01	peak
5	5354.700	50.55	3.62	54.17	74.00	-19.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

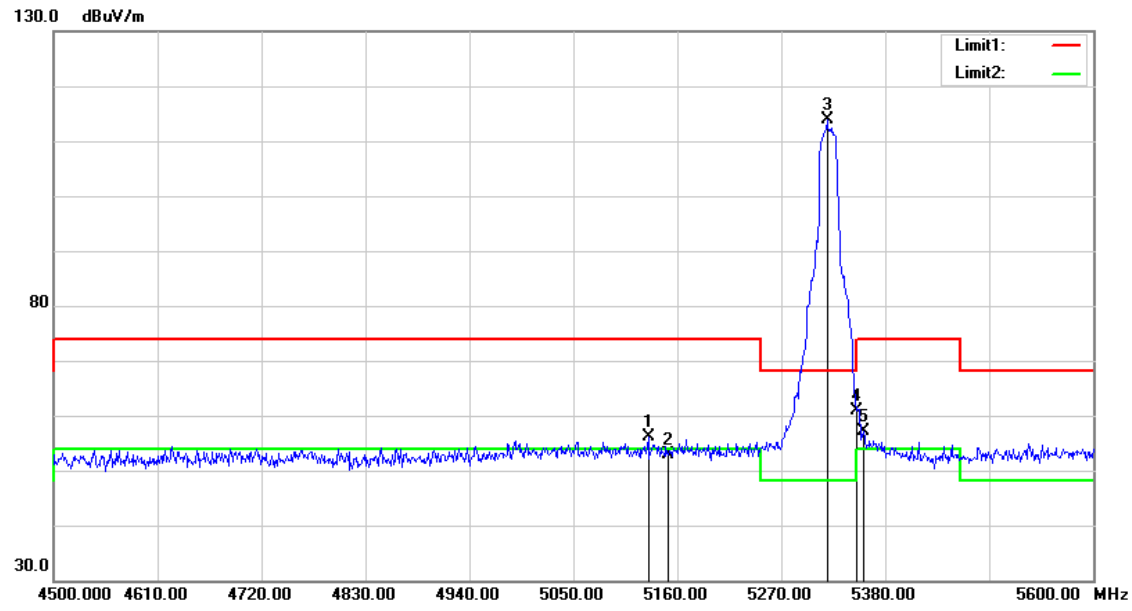


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5129.200	52.70	3.32	56.02	74.00	-17.98	peak
2	5150.000	49.54	3.35	52.89	74.00	-21.11	peak
3	5318.400	110.31	3.57	113.88	--	--	peak
4	5350.000	57.19	3.62	60.81	74.00	-13.19	peak
5	5356.900	53.48	3.63	57.11	74.00	-16.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

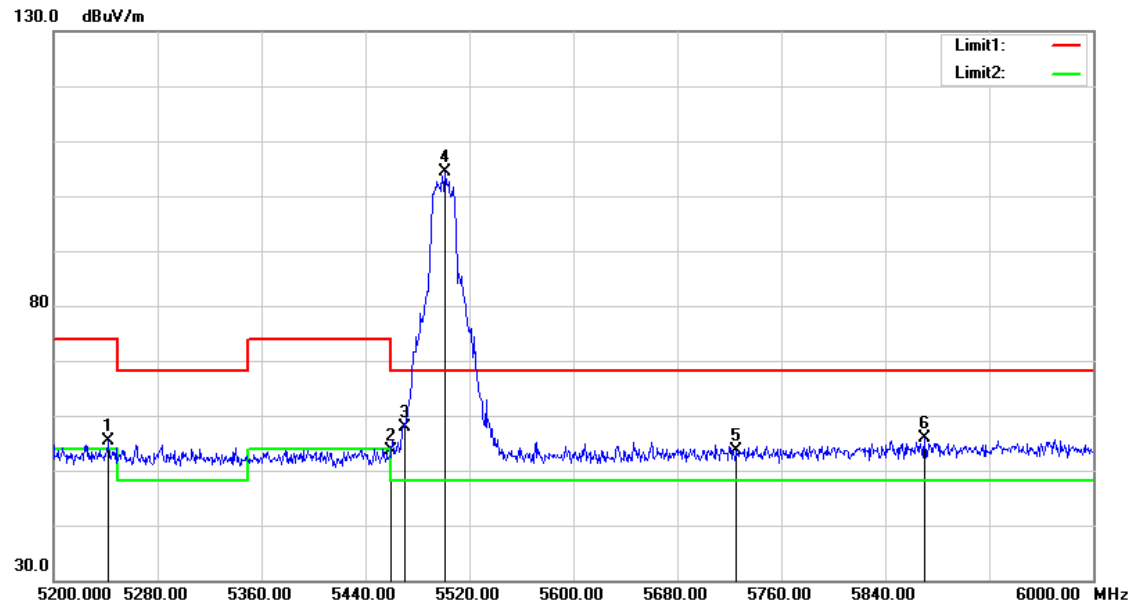


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5242.400	51.80	3.47	55.27	74.00	-18.73	peak
2	5460.000	49.77	3.76	53.53	74.00	-20.47	peak
3	5470.000	54.11	3.78	57.89	68.20	-10.31	peak
4	5500.800	100.62	3.82	104.44	--	--	peak
5	5725.000	49.40	4.19	53.59	68.20	-14.61	peak
6	5870.400	51.55	4.43	55.98	68.20	-12.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

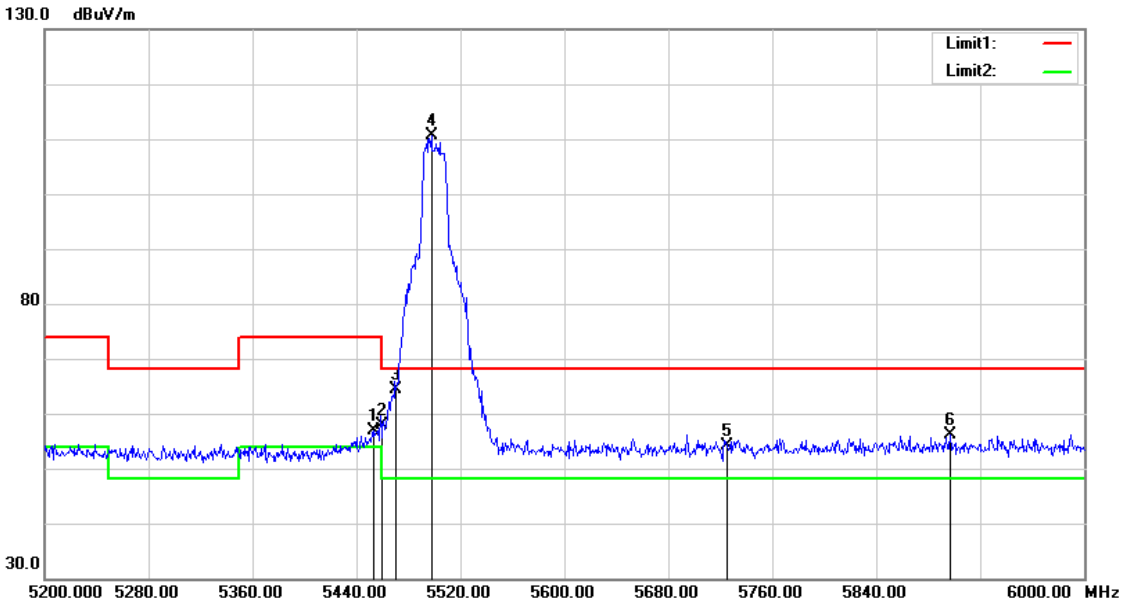


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.800	53.10	3.75	56.85	74.00	-17.15	peak
2	5460.000	54.16	3.76	57.92	74.00	-16.08	peak
3	5470.000	60.65	3.78	64.43	68.20	-3.77	peak
4	5497.600	106.82	3.81	110.63	--	--	peak
5	5725.000	50.04	4.19	54.23	68.20	-13.97	peak
6	5896.800	51.62	4.48	56.10	68.20	-12.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

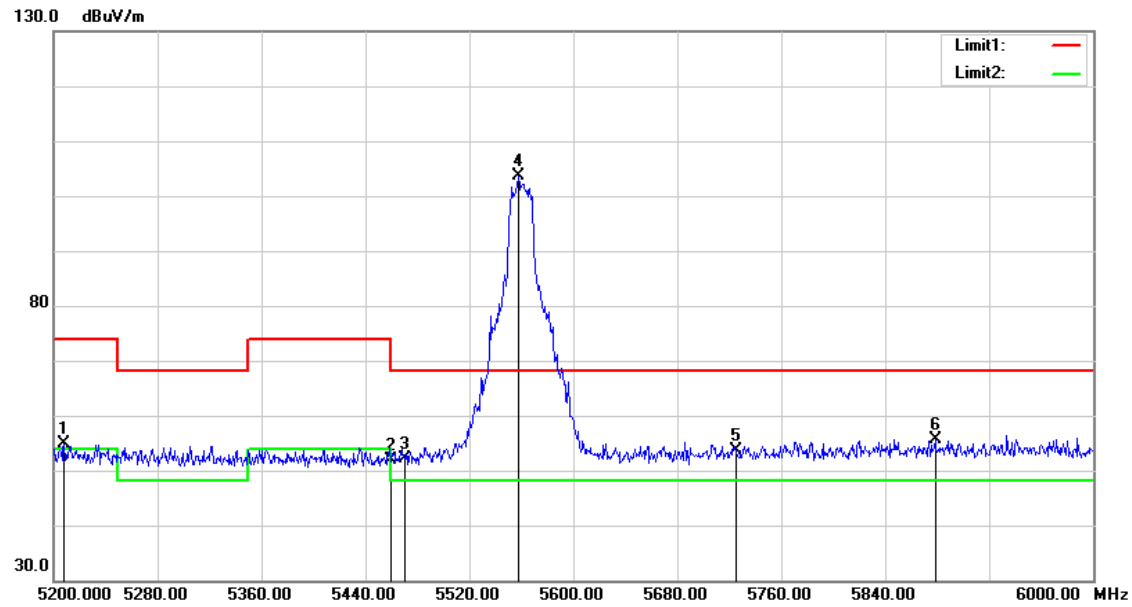


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.000	51.55	3.43	54.98	74.00	-19.02	peak
2	5460.000	48.24	3.76	52.00	74.00	-22.00	peak
3	5470.000	48.23	3.78	52.01	68.20	-16.19	peak
4	5557.600	99.60	3.91	103.51	--	--	peak
5	5725.000	49.50	4.19	53.69	68.20	-14.51	peak
6	5878.400	51.25	4.44	55.69	68.20	-12.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.--

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

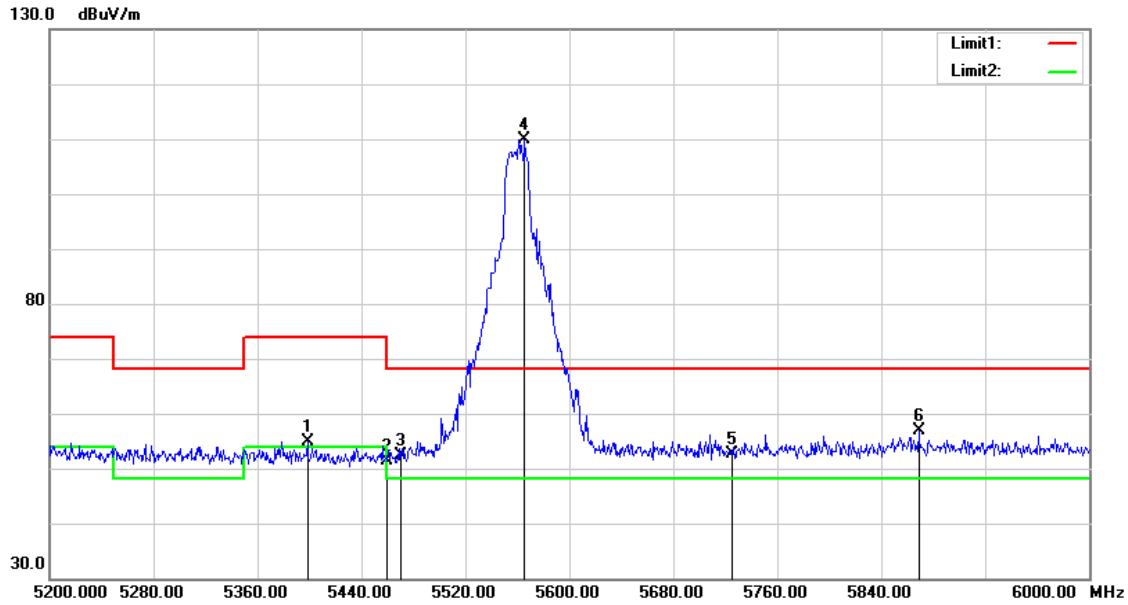


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5398.400	51.27	3.68	54.95	74.00	-19.05	peak
2	5460.000	47.59	3.76	51.35	74.00	-22.65	peak
3	5470.000	48.56	3.78	52.34	68.20	-15.86	peak
4	5565.600	105.95	3.93	109.88	--	--	peak
5	5725.000	48.41	4.19	52.60	68.20	-15.60	peak
6	5868.800	52.39	4.42	56.81	68.20	-11.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

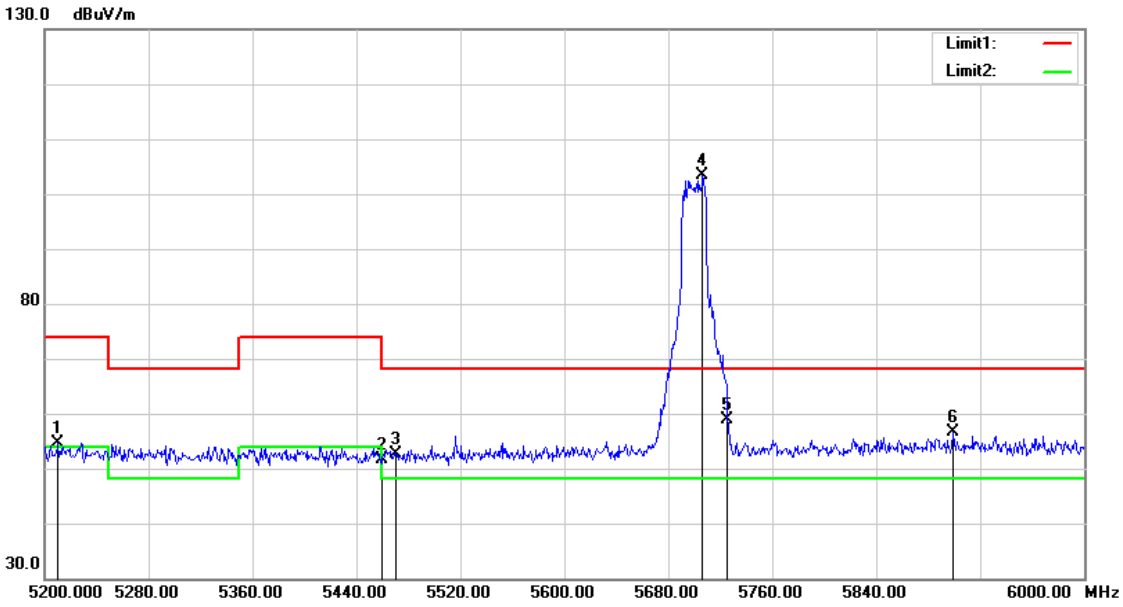


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5210.400	51.27	3.43	54.70	74.00	-19.30	peak
2	5460.000	47.83	3.76	51.59	74.00	-22.41	peak
3	5470.000	48.96	3.78	52.74	68.20	-15.46	peak
4	5706.400	99.14	4.17	103.31	--	--	peak
5	5725.000	54.74	4.19	58.93	68.20	-9.27	peak
6	5899.200	52.07	4.48	56.55	68.20	-11.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

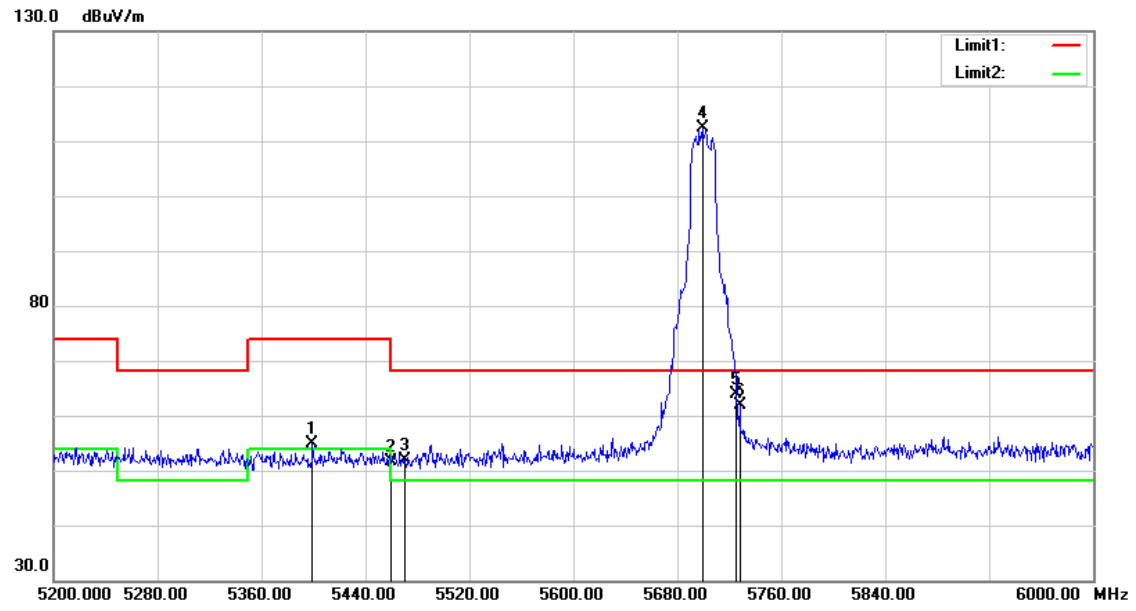


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.200	51.17	3.68	54.85	74.00	-19.15	peak
2	5460.000	47.92	3.76	51.68	74.00	-22.32	peak
3	5470.000	48.13	3.78	51.91	68.20	-16.29	peak
4	5699.200	108.14	4.14	112.28	--	--	peak
5	5725.000	59.64	4.19	63.83	68.20	-4.37	peak
6	5728.000	57.76	4.20	61.96	68.20	-6.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

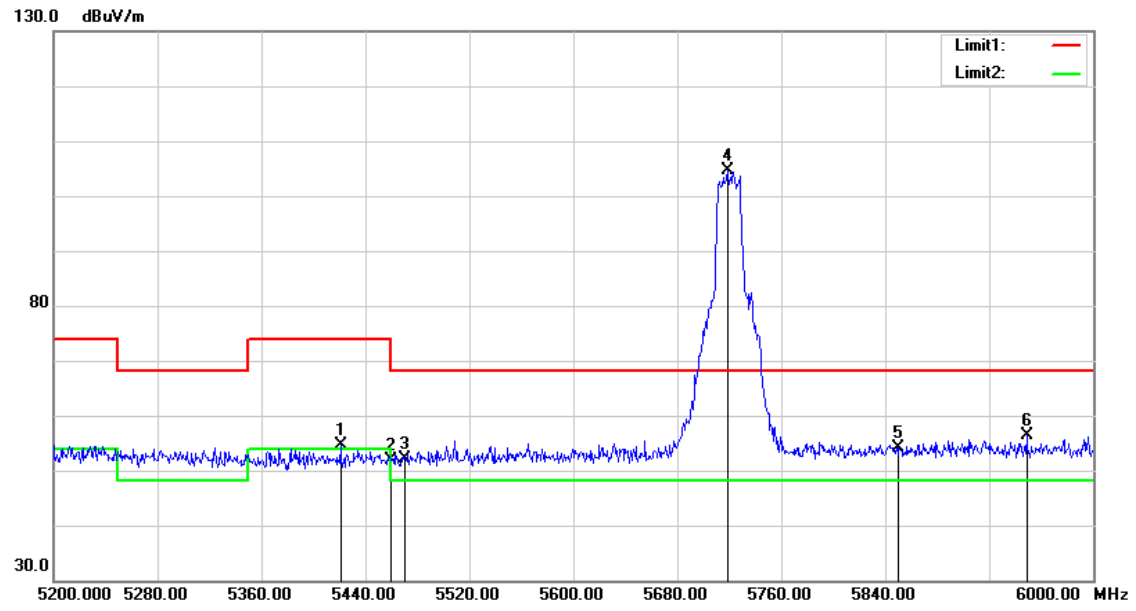


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.800	50.99	3.71	54.70	74.00	-19.30	peak
2	5460.000	48.22	3.76	51.98	74.00	-22.02	peak
3	5470.000	48.38	3.78	52.16	68.20	-16.04	peak
4	5718.400	100.40	4.18	104.58	--	--	peak
5	5850.000	49.71	4.40	54.11	68.20	-14.09	peak
6	5948.800	51.75	4.57	56.32	68.20	-11.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

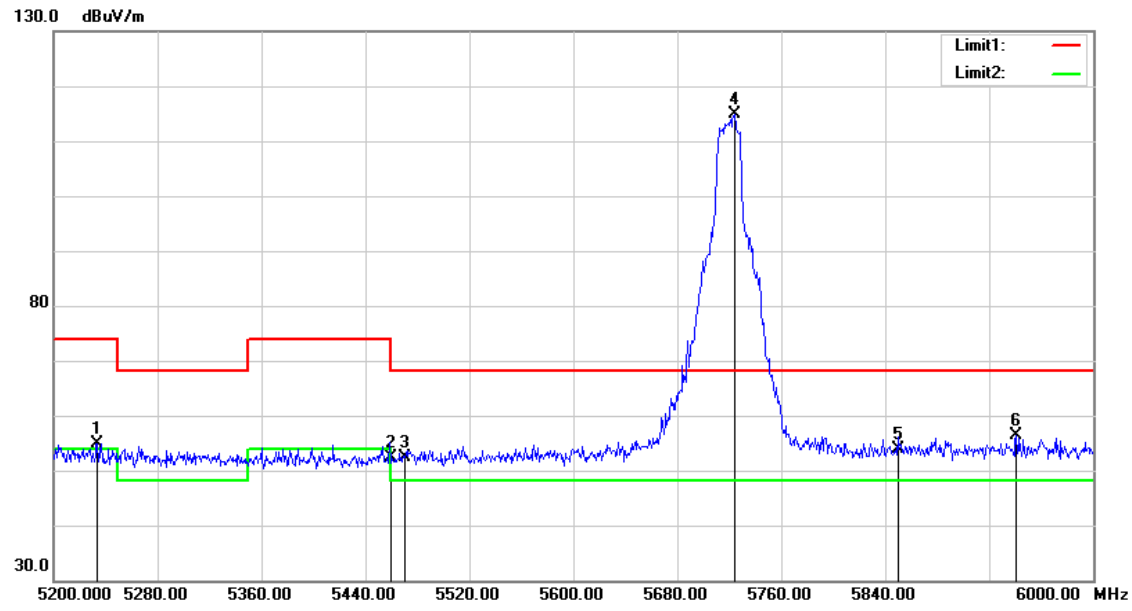


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5233.600	51.53	3.46	54.99	74.00	-19.01	peak
2	5460.000	48.55	3.76	52.31	74.00	-21.69	peak
3	5470.000	48.64	3.78	52.42	68.20	-15.78	peak
4	5724.000	110.58	4.19	114.77	--	--	peak
5	5850.000	49.52	4.40	53.92	68.20	-14.28	peak
6	5940.800	51.83	4.56	56.39	68.20	-11.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

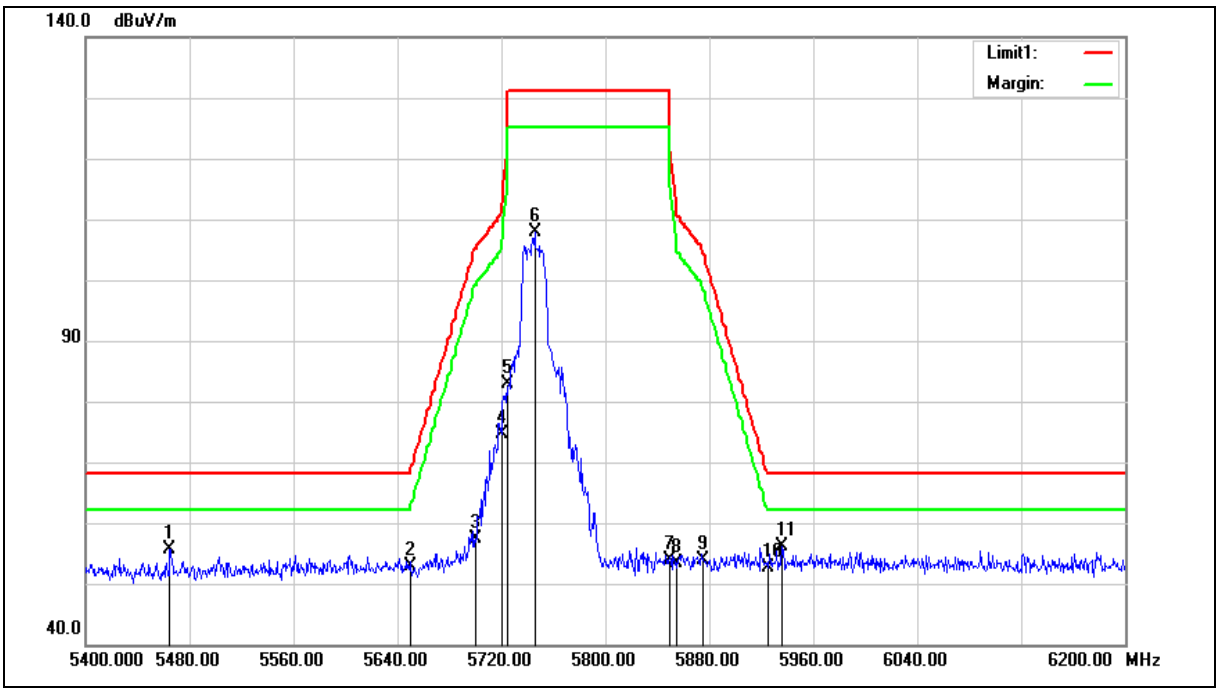

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5464.800	51.89	3.76	55.65	68.20	-12.55	peak
2	5650.000	48.78	4.06	52.84	68.20	-15.36	peak
3	5700.000	53.20	4.15	57.35	105.20	-47.85	peak
4	5720.000	70.55	4.18	74.73	110.80	-36.07	peak
5	5725.000	78.66	4.19	82.85	122.20	-39.35	peak
6	5745.600	103.58	4.22	107.80	--	--	peak
7	5850.000	49.37	4.40	53.77	122.20	-68.43	peak
8	5855.000	49.07	4.41	53.48	110.80	-57.32	peak
9	5875.000	49.52	4.44	53.96	105.20	-51.24	peak
10	5925.000	48.12	4.53	52.65	68.20	-15.55	peak
11	5936.000	51.71	4.54	56.25	68.20	-11.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

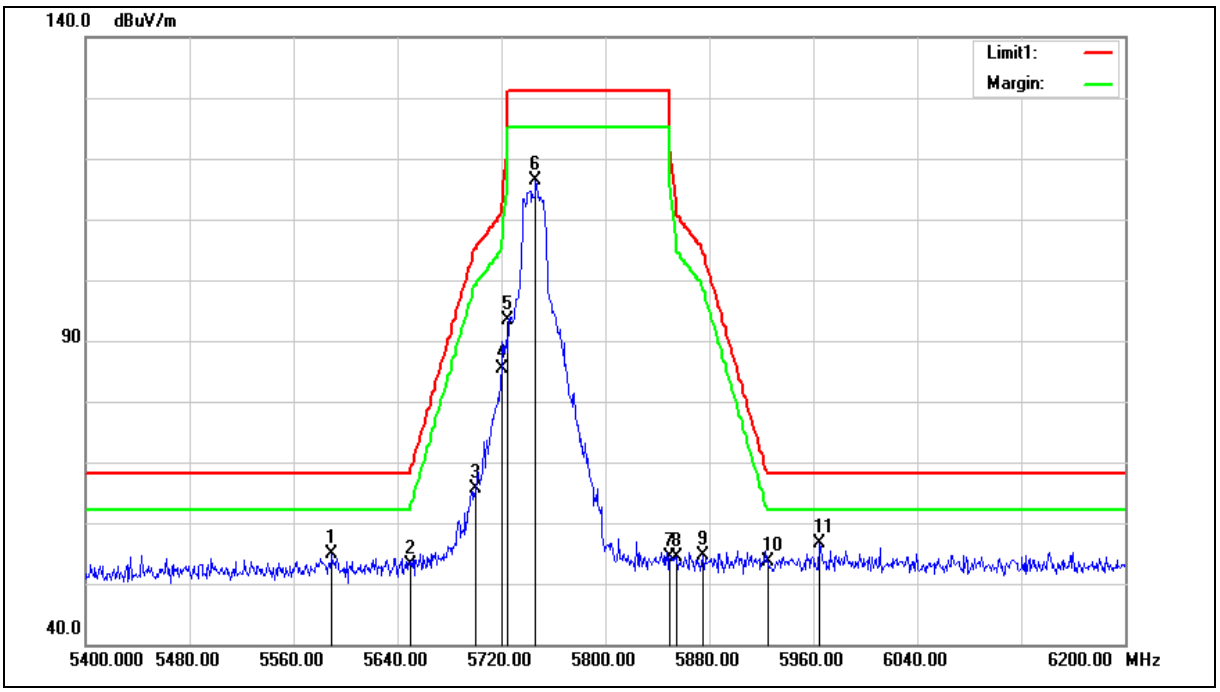

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5589.600	50.81	3.97	54.78	68.20	-13.42	peak
2	5650.000	49.07	4.06	53.13	68.20	-15.07	peak
3	5700.000	61.44	4.15	65.59	105.20	-39.61	peak
4	5720.000	81.11	4.18	85.29	110.80	-25.51	peak
5	5725.000	89.20	4.19	93.39	122.20	-28.81	peak
6	5746.400	112.04	4.23	116.27	--	--	peak
7	5850.000	49.89	4.40	54.29	122.20	-67.91	peak
8	5855.000	50.04	4.41	54.45	110.80	-56.35	peak
9	5875.000	50.10	4.44	54.54	105.20	-50.66	peak
10	5925.000	48.99	4.53	53.52	68.20	-14.68	peak
11	5964.800	51.94	4.60	56.54	68.20	-11.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

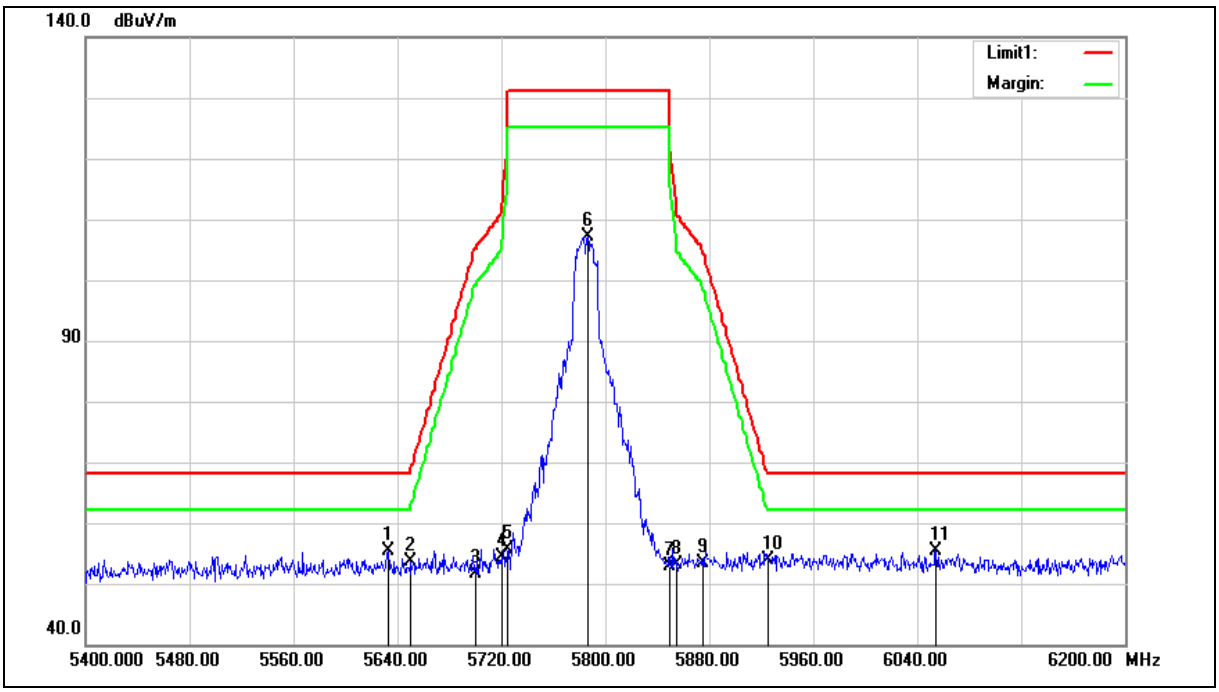

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	51.22	4.04	55.26	68.20	-12.94	peak
2	5650.000	49.49	4.06	53.55	68.20	-14.65	peak
3	5700.000	47.45	4.15	51.60	105.20	-53.60	peak
4	5720.000	50.16	4.18	54.34	110.80	-56.46	peak
5	5725.000	51.34	4.19	55.53	122.20	-66.67	peak
6	5786.400	102.84	4.29	107.13	--	--	peak
7	5850.000	48.40	4.40	52.80	122.20	-69.40	peak
8	5855.000	48.78	4.41	53.19	110.80	-57.61	peak
9	5875.000	48.88	4.44	53.32	105.20	-51.88	peak
10	5925.000	49.47	4.53	54.00	68.20	-14.20	peak
11	6054.400	50.63	4.83	55.46	68.20	-12.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

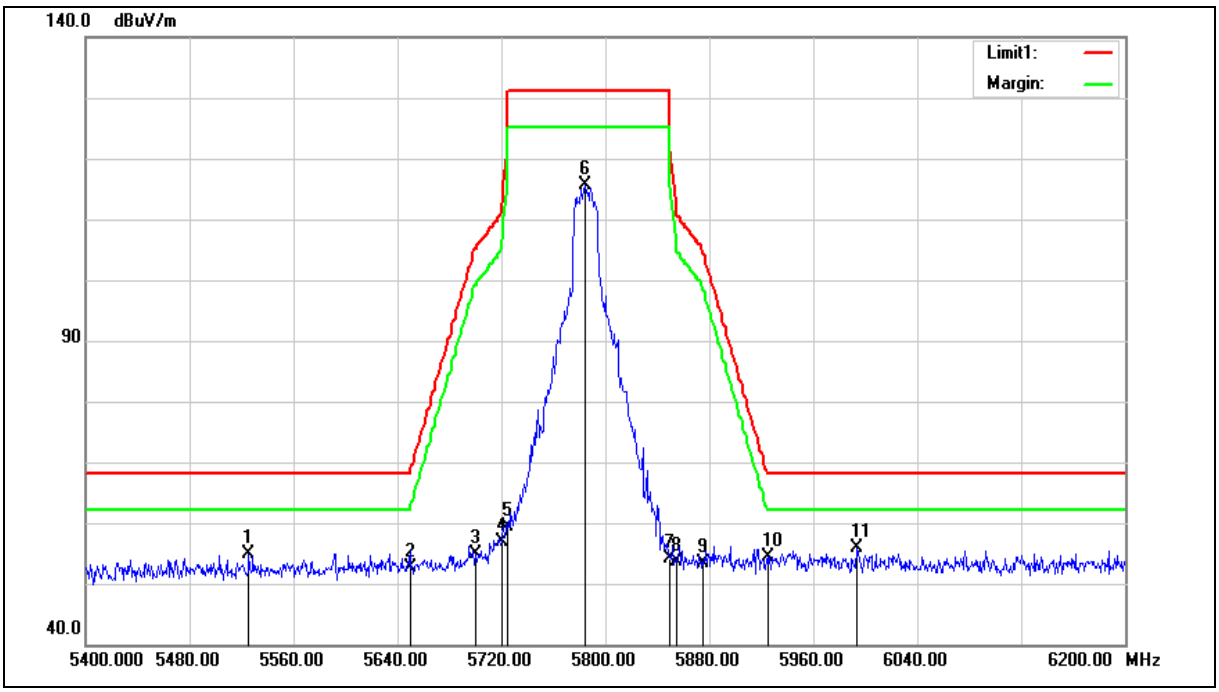

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5525.600	51.10	3.86	54.96	68.20	-13.24	peak
2	5650.000	48.55	4.06	52.61	68.20	-15.59	peak
3	5700.000	50.83	4.15	54.98	105.20	-50.22	peak
4	5720.000	52.62	4.18	56.80	110.80	-54.00	peak
5	5725.000	55.09	4.19	59.28	122.20	-62.92	peak
6	5784.800	111.38	4.29	115.67	--	--	peak
7	5850.000	49.77	4.40	54.17	122.20	-68.03	peak
8	5855.000	49.19	4.41	53.60	110.80	-57.20	peak
9	5875.000	48.82	4.44	53.26	105.20	-51.94	peak
10	5925.000	49.80	4.53	54.33	68.20	-13.87	peak
11	5993.600	51.30	4.64	55.94	68.20	-12.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

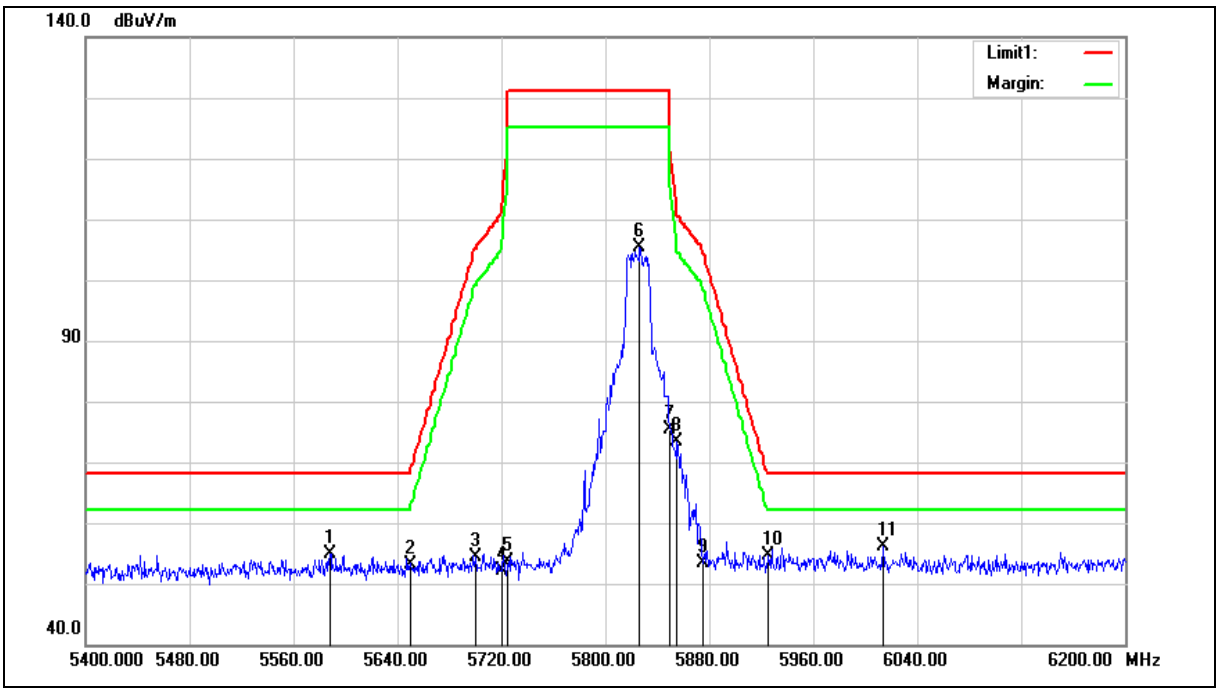

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5588.000	50.82	3.97	54.79	68.20	-13.41	peak
2	5650.000	49.04	4.06	53.10	68.20	-15.10	peak
3	5700.000	50.25	4.15	54.40	105.20	-50.80	peak
4	5720.000	47.97	4.18	52.15	110.80	-58.65	peak
5	5725.000	49.42	4.19	53.61	122.20	-68.59	peak
6	5826.400	101.06	4.36	105.42	--	--	peak
7	5850.000	70.97	4.40	75.37	122.20	-46.83	peak
8	5855.000	69.03	4.41	73.44	110.80	-37.36	peak
9	5875.000	49.05	4.44	53.49	105.20	-51.71	peak
10	5925.000	50.03	4.53	54.56	68.20	-13.64	peak
11	6013.600	51.50	4.70	56.20	68.20	-12.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

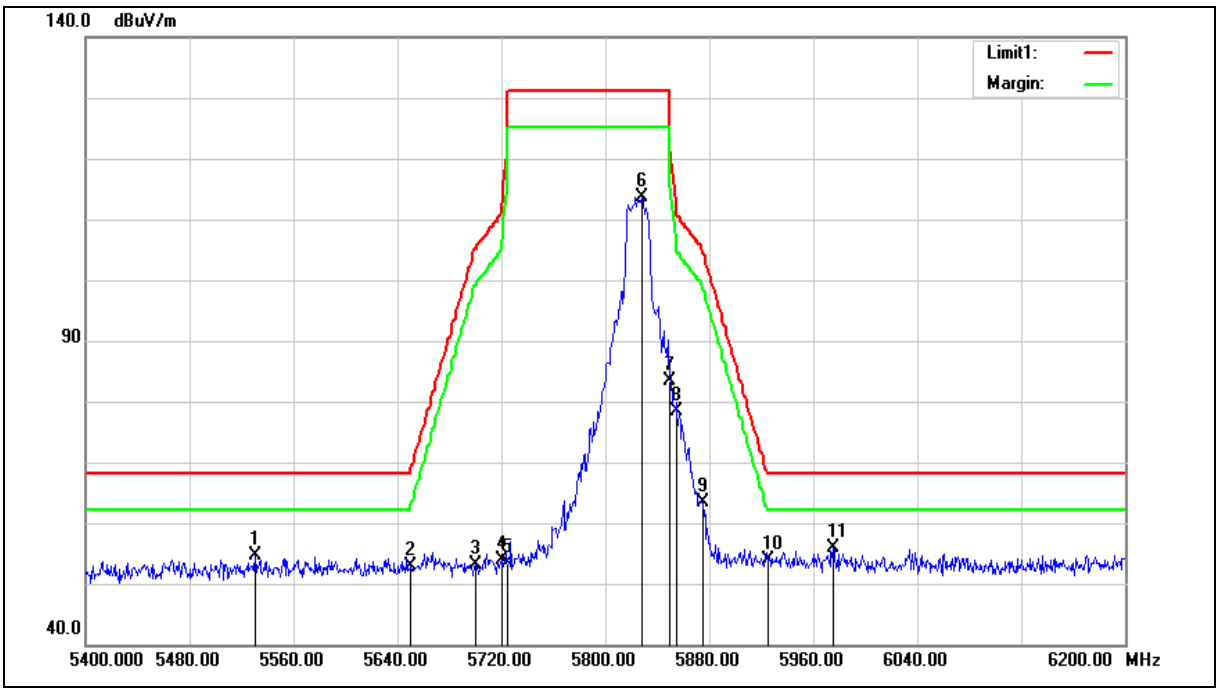

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5530.400	50.79	3.87	54.66	68.20	-13.54	peak
2	5650.000	48.74	4.06	52.80	68.20	-15.40	peak
3	5700.000	48.94	4.15	53.09	105.20	-52.11	peak
4	5720.000	49.81	4.18	53.99	110.80	-56.81	peak
5	5725.000	49.29	4.19	53.48	122.20	-68.72	peak
6	5828.000	109.37	4.36	113.73	--	--	peak
7	5850.000	78.94	4.40	83.34	122.20	-38.86	peak
8	5855.000	74.03	4.41	78.44	110.80	-32.36	peak
9	5875.000	58.89	4.44	63.33	105.20	-41.87	peak
10	5925.000	49.24	4.53	53.77	68.20	-14.43	peak
11	5975.200	51.17	4.61	55.78	68.20	-12.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

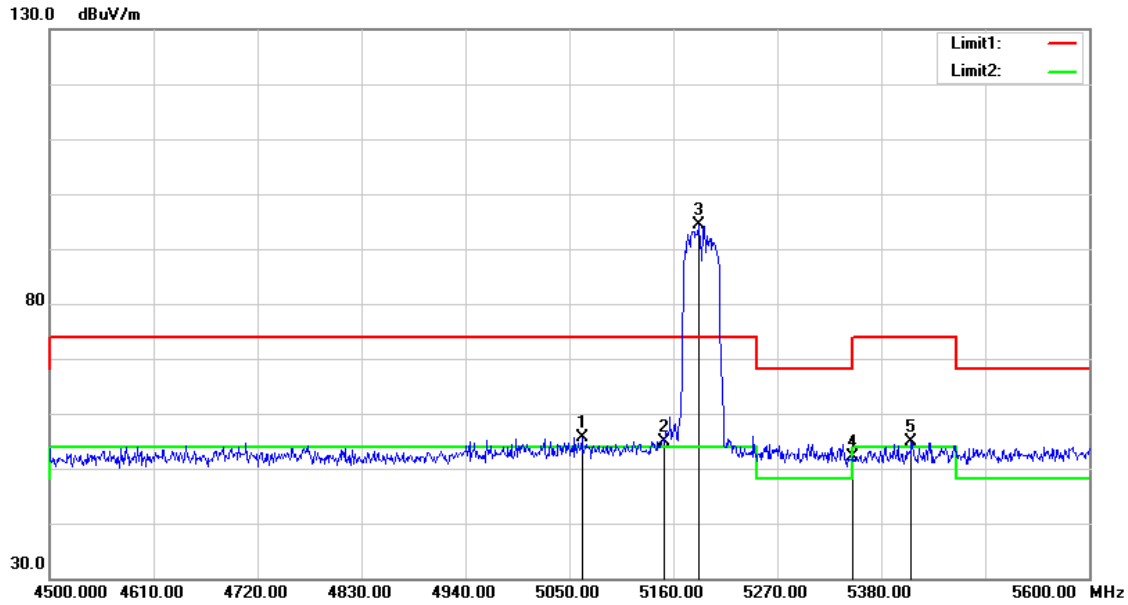


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5063.200	52.40	3.23	55.63	74.00	-18.37	peak
2	5150.000	51.59	3.35	54.94	74.00	-19.06	peak
3	5186.400	91.10	3.40	94.50	--	--	peak
4	5350.000	48.41	3.62	52.03	74.00	-21.97	peak
5	5411.900	51.25	3.70	54.95	74.00	-19.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

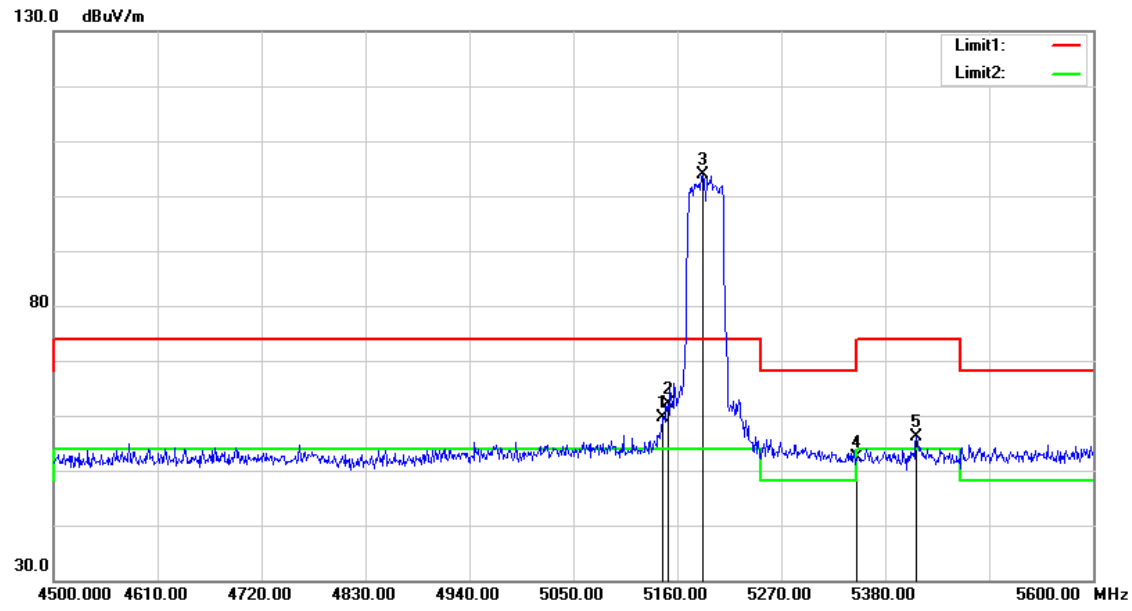


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.600	56.23	3.35	59.58	74.00	-14.42	peak
2	5150.000	58.74	3.35	62.09	74.00	-11.91	peak
3	5187.500	100.51	3.40	103.91	--	--	peak
4	5350.000	48.69	3.62	52.31	74.00	-21.69	peak
5	5413.000	52.36	3.70	56.06	74.00	-17.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

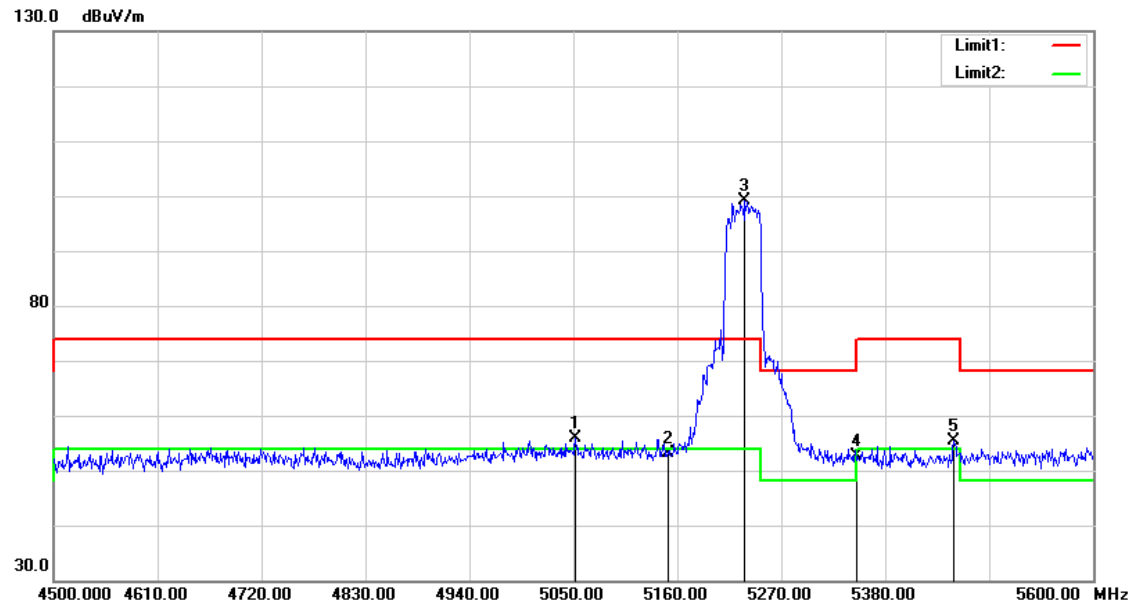


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.200	52.54	3.22	55.76	74.00	-18.24	peak
2	5150.000	49.73	3.35	53.08	74.00	-20.92	peak
3	5231.500	95.63	3.46	99.09	--	--	peak
4	5350.000	49.08	3.62	52.70	74.00	-21.30	peak
5	5452.600	51.73	3.75	55.48	74.00	-18.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

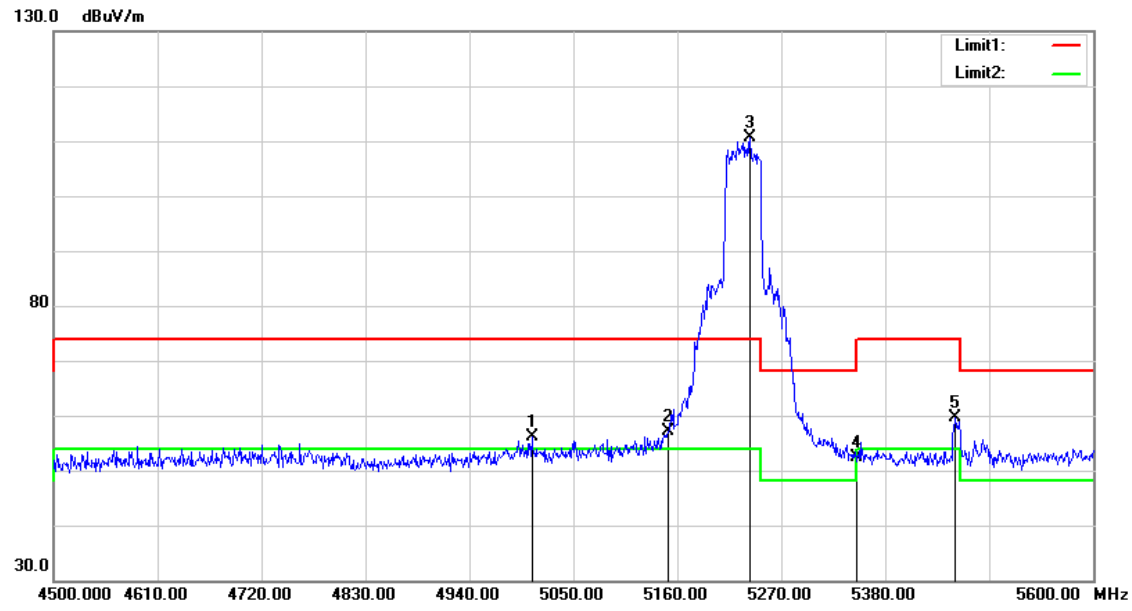


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5006.000	53.09	3.15	56.24	74.00	-17.76	peak
2	5150.000	53.84	3.35	57.19	74.00	-16.81	peak
3	5237.000	107.16	3.46	110.62	--	--	peak
4	5350.000	48.68	3.62	52.30	74.00	-21.70	peak
5	5453.700	55.77	3.75	59.52	74.00	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

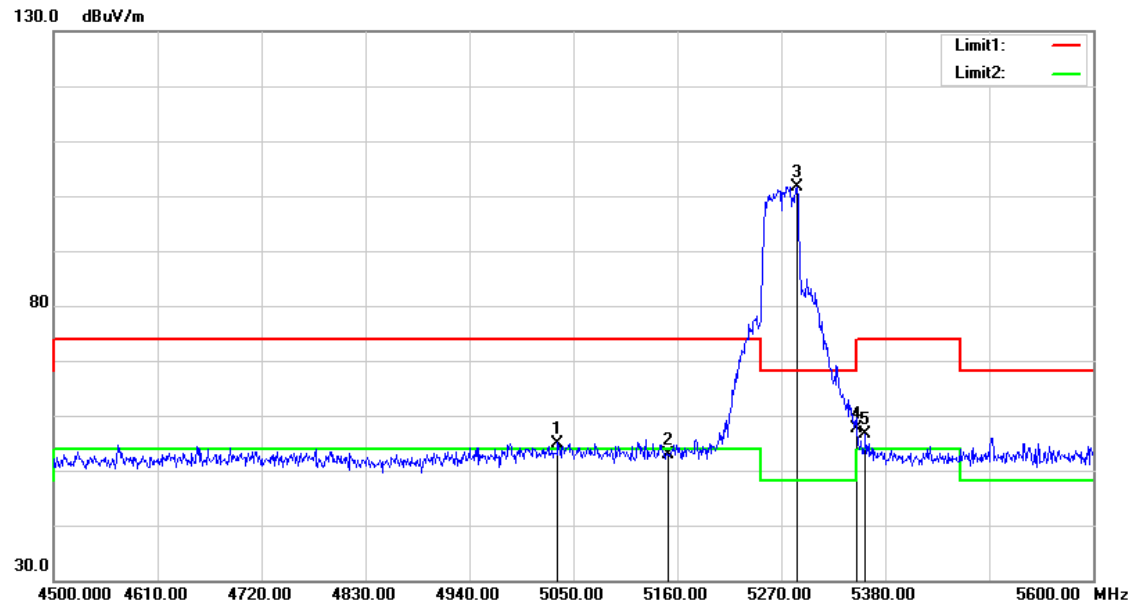


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5033.500	51.80	3.20	55.00	74.00	-19.00	peak
2	5150.000	49.62	3.35	52.97	74.00	-21.03	peak
3	5286.500	98.13	3.53	101.66	--	--	peak
4	5350.000	53.99	3.62	57.61	74.00	-16.39	peak
5	5359.100	53.08	3.63	56.71	74.00	-17.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

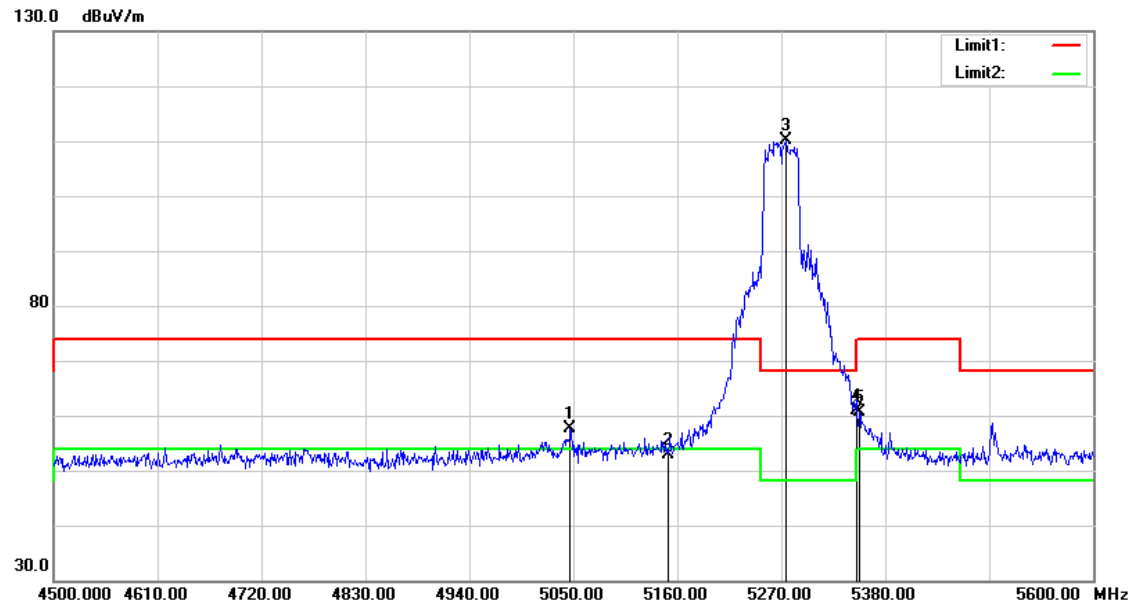


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.700	54.42	3.21	57.63	74.00	-16.37	peak
2	5150.000	49.50	3.35	52.85	74.00	-21.15	peak
3	5275.500	106.68	3.51	110.19	--	--	peak
4	5350.000	57.18	3.62	60.80	74.00	-13.20	peak
5	5352.500	56.90	3.62	60.52	74.00	-13.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

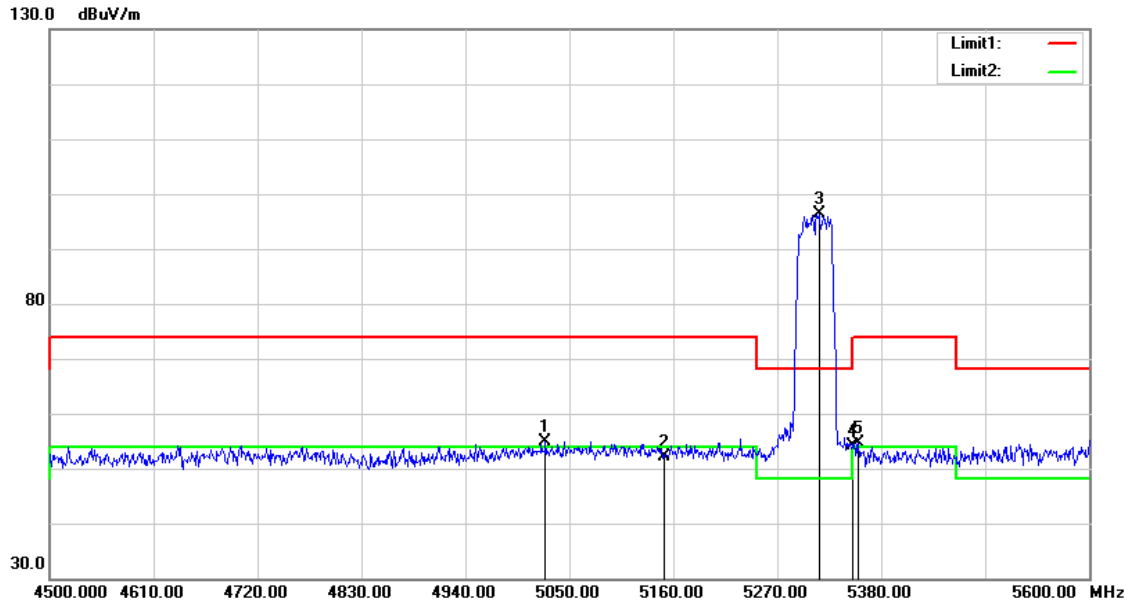


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5024.700	51.75	3.18	54.93	74.00	-19.07	peak
2	5150.000	48.78	3.35	52.13	74.00	-21.87	peak
3	5314.000	92.84	3.57	96.41	--	--	peak
4	5350.000	50.50	3.62	54.12	74.00	-19.88	peak
5	5355.800	50.97	3.62	54.59	74.00	-19.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

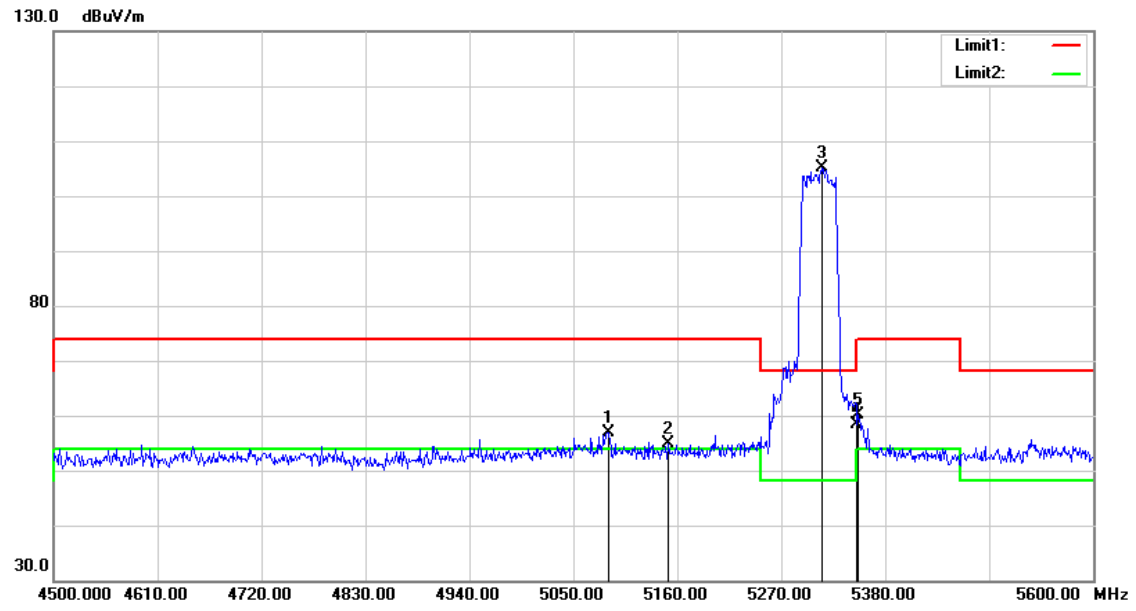


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.400	53.55	3.26	56.81	74.00	-17.19	peak
2	5150.000	51.50	3.35	54.85	74.00	-19.15	peak
3	5312.900	101.64	3.57	105.21	--	--	peak
4	5350.000	54.73	3.62	58.35	74.00	-15.65	peak
5	5351.400	56.47	3.62	60.09	74.00	-13.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

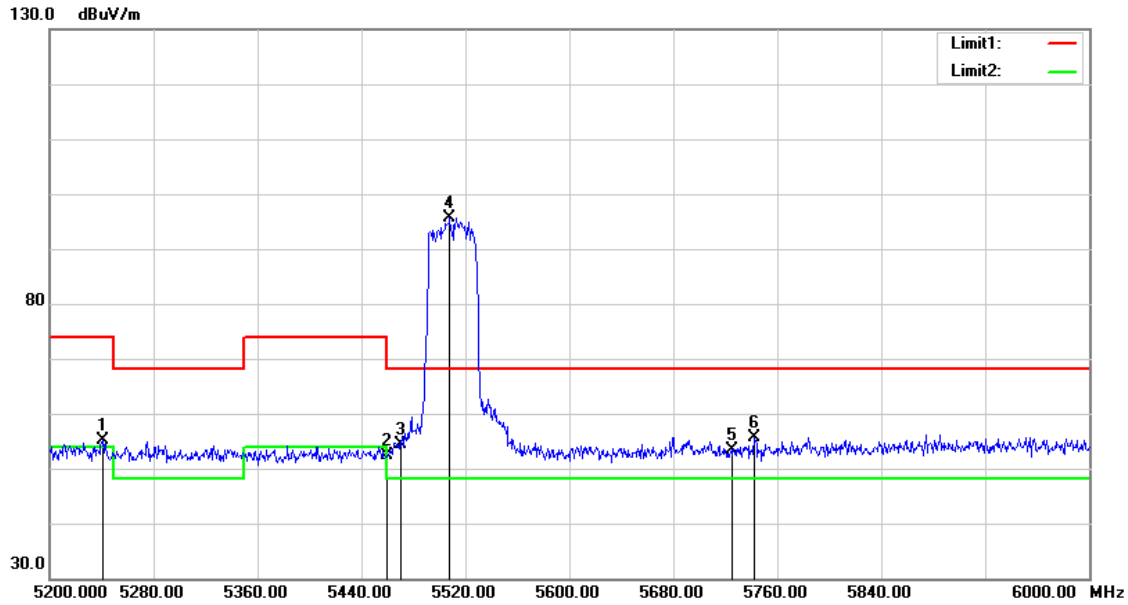


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5240.800	51.70	3.47	55.17	74.00	-18.83	peak
2	5460.000	48.63	3.76	52.39	74.00	-21.61	peak
3	5470.000	50.66	3.78	54.44	68.20	-13.76	peak
4	5508.000	91.84	3.83	95.67	--	--	peak
5	5725.000	49.25	4.19	53.44	68.20	-14.76	peak
6	5742.400	51.53	4.22	55.75	68.20	-12.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

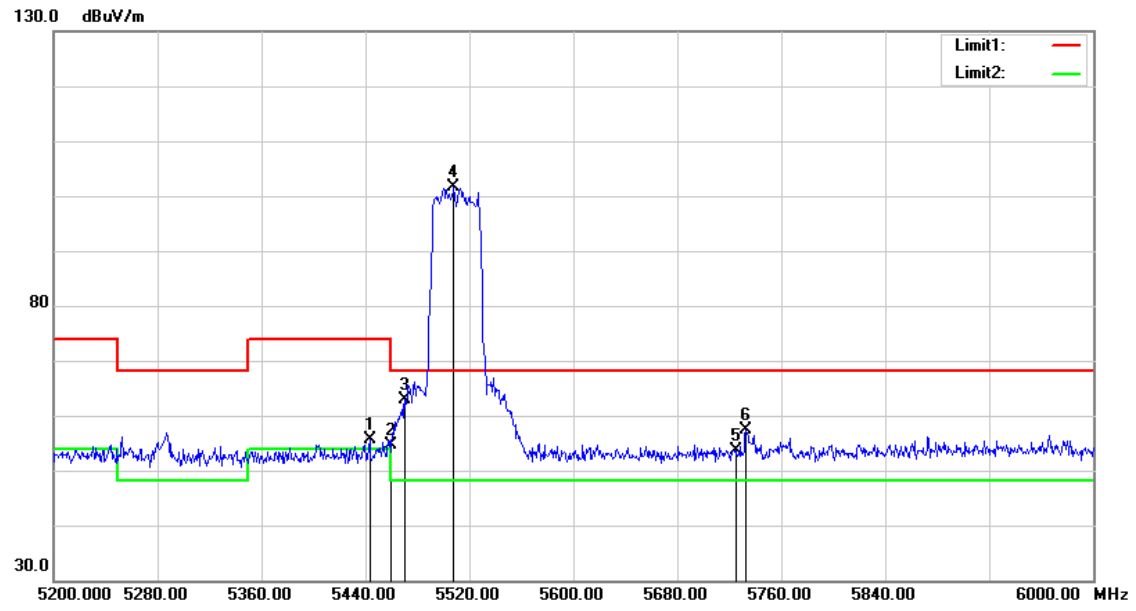


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.200	51.80	3.73	55.53	74.00	-18.47	peak
2	5460.000	50.76	3.76	54.52	74.00	-19.48	peak
3	5470.000	59.10	3.78	62.88	68.20	-5.32	peak
4	5508.000	97.76	3.83	101.59	--	--	peak
5	5725.000	49.45	4.19	53.64	68.20	-14.56	peak
6	5732.800	53.24	4.21	57.45	68.20	-10.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

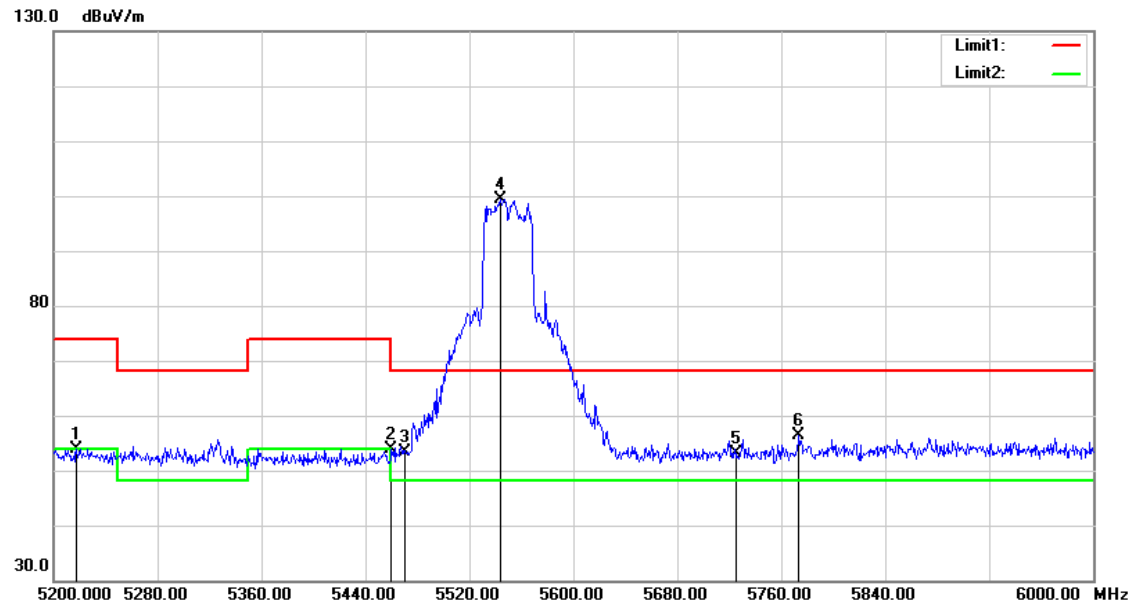


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5217.600	50.42	3.43	53.85	74.00	-20.15	peak
2	5460.000	50.09	3.76	53.85	74.00	-20.15	peak
3	5470.000	49.72	3.78	53.50	68.20	-14.70	peak
4	5544.000	95.39	3.89	99.28	--	--	peak
5	5725.000	48.88	4.19	53.07	68.20	-15.13	peak
6	5773.600	52.22	4.27	56.49	68.20	-11.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

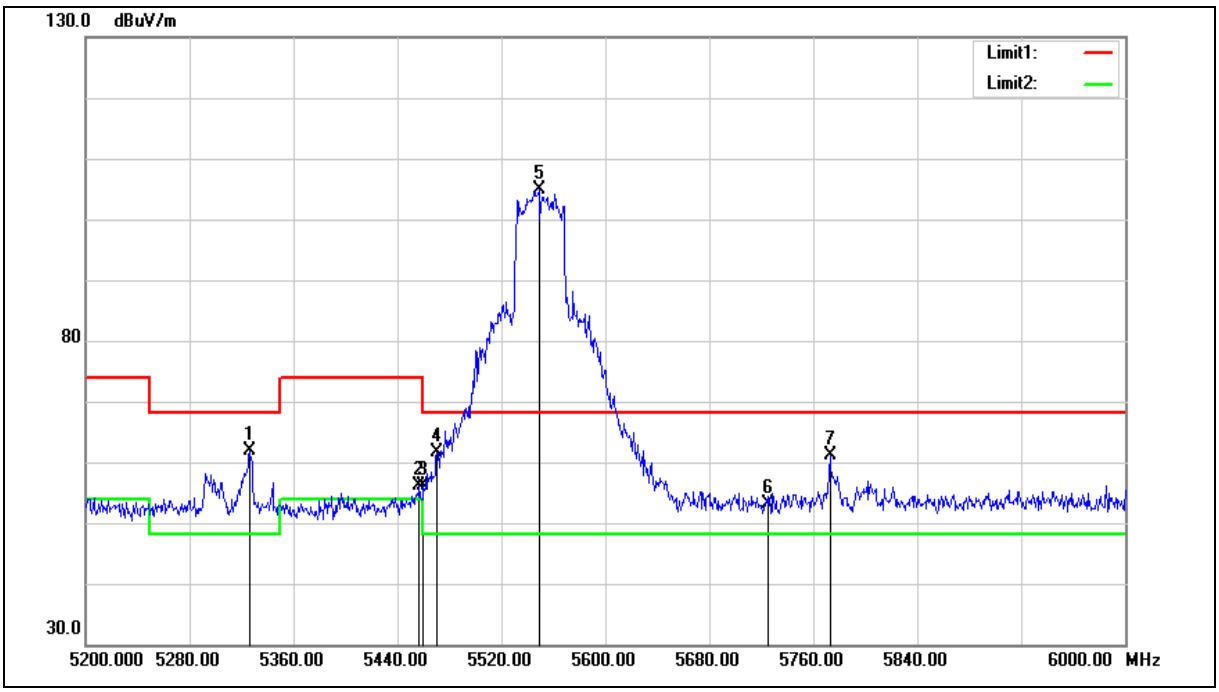

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5326.400	58.39	3.59	61.98	68.20	-6.22	peak
2	5456.800	52.33	3.76	56.09	74.00	-17.91	peak
3	5460.000	52.45	3.76	56.21	74.00	-17.79	peak
4	5470.000	57.84	3.78	61.62	68.20	-6.58	peak
5	5548.800	100.96	3.90	104.86	--	--	peak
6	5725.000	48.98	4.19	53.17	68.20	-15.03	peak
7	5772.800	56.83	4.27	61.10	68.20	-7.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

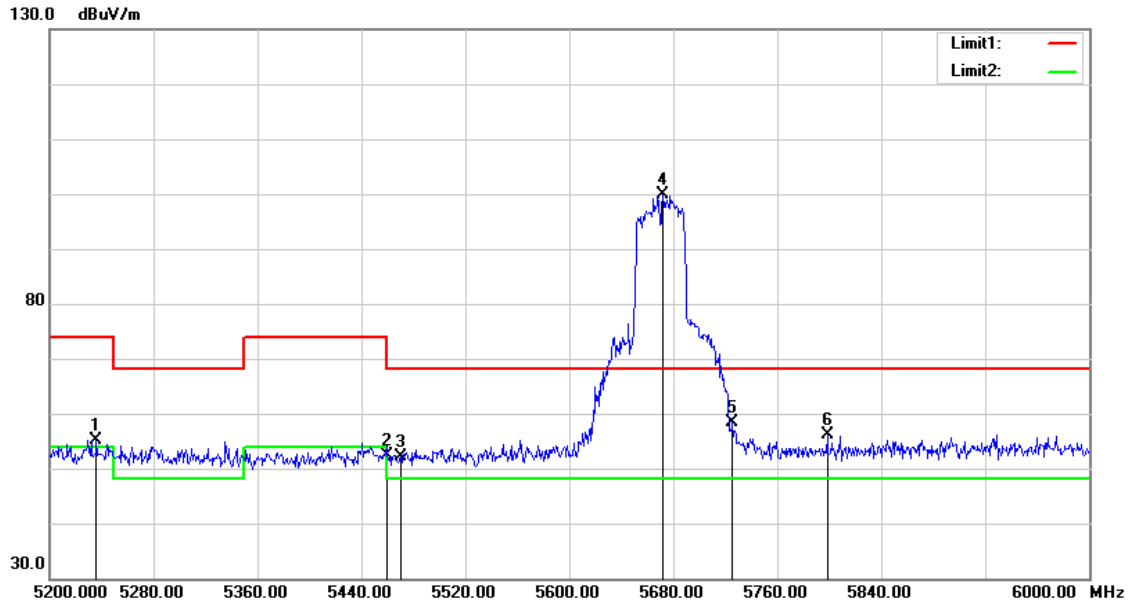


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.000	51.68	3.46	55.14	74.00	-18.86	peak
2	5460.000	48.72	3.76	52.48	74.00	-21.52	peak
3	5470.000	48.35	3.78	52.13	68.20	-16.07	peak
4	5672.000	95.85	4.10	99.95	--	--	peak
5	5725.000	54.14	4.19	58.33	68.20	-9.87	peak
6	5798.400	51.70	4.32	56.02	68.20	-12.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

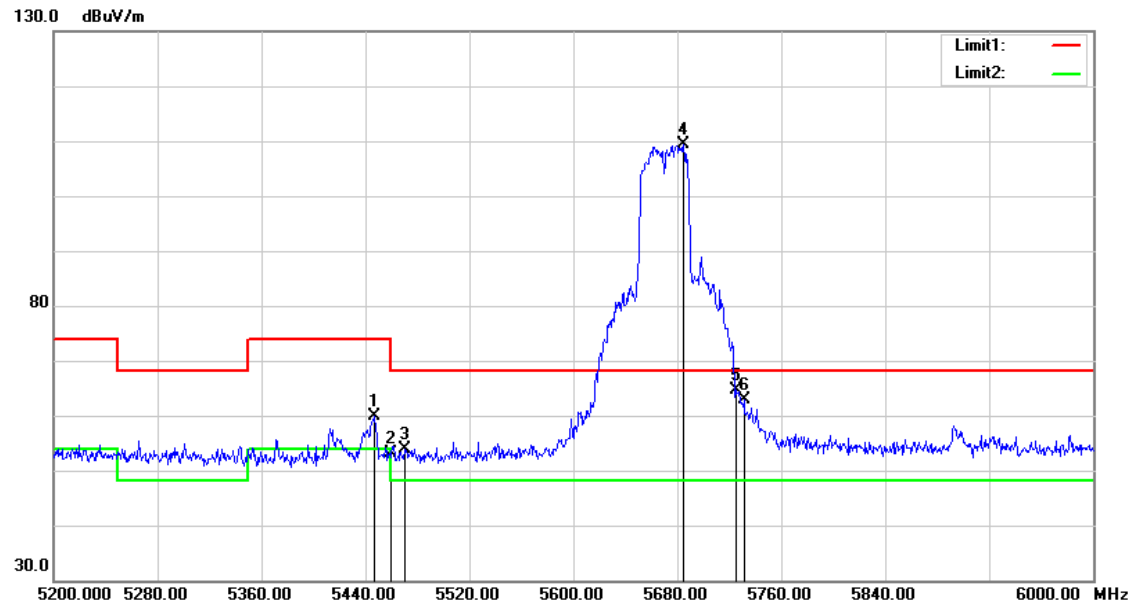


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	56.24	3.74	59.98	74.00	-14.02	peak
2	5460.000	49.25	3.76	53.01	74.00	-20.99	peak
3	5470.000	50.06	3.78	53.84	68.20	-14.36	peak
4	5684.800	105.15	4.12	109.27	--	--	peak
5	5725.000	60.52	4.19	64.71	68.20	-3.49	peak
6	5731.200	58.74	4.21	62.95	68.20	-5.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

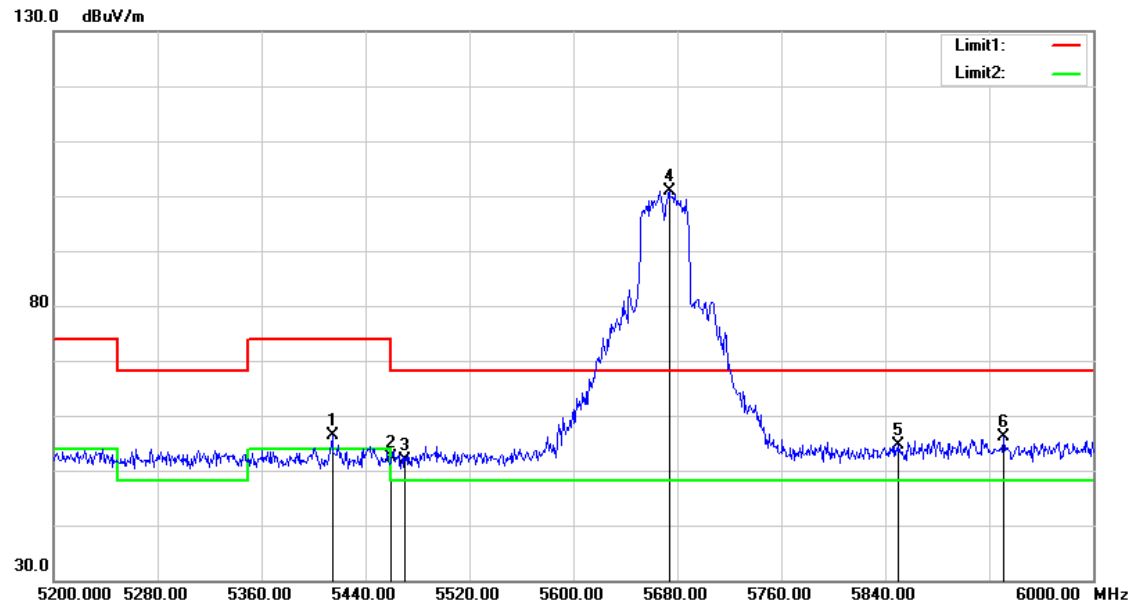


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.400	52.72	3.70	56.42	74.00	-17.58	peak
2	5460.000	48.63	3.76	52.39	74.00	-21.61	peak
3	5470.000	47.98	3.78	51.76	68.20	-16.44	peak
4	5673.600	96.78	4.10	100.88	--	--	peak
5	5850.000	50.23	4.40	54.63	68.20	-13.57	peak
6	5931.200	51.71	4.54	56.25	68.20	-11.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

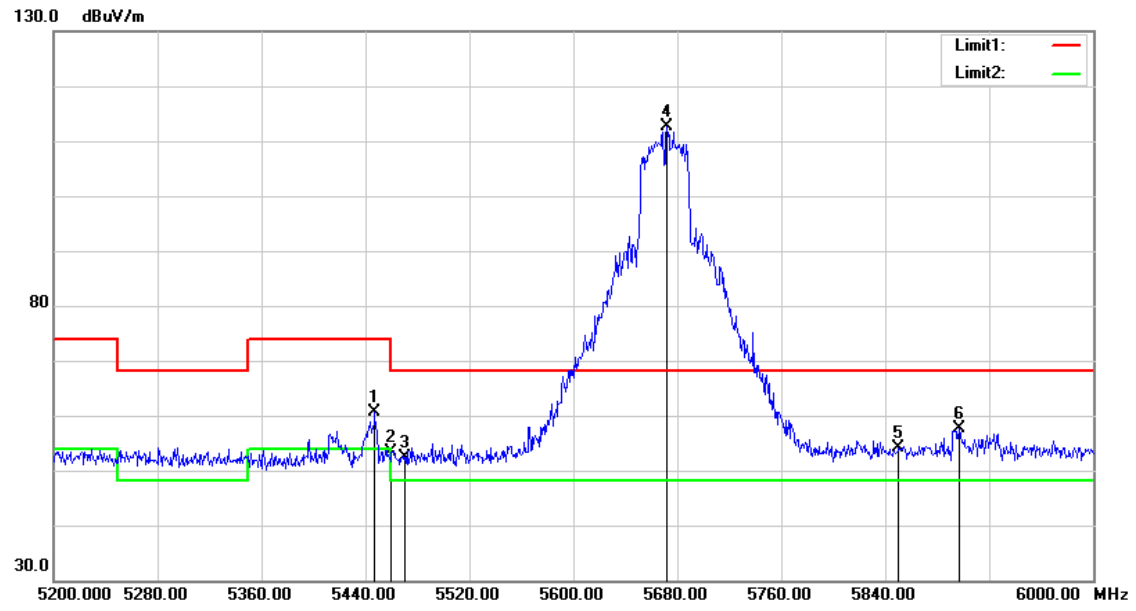


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	56.77	3.74	60.51	74.00	-13.49	peak
2	5460.000	49.64	3.76	53.40	74.00	-20.60	peak
3	5470.000	48.52	3.78	52.30	68.20	-15.90	peak
4	5672.000	108.55	4.10	112.65	--	--	peak
5	5850.000	49.64	4.40	54.04	68.20	-14.16	peak
6	5896.800	53.23	4.48	57.71	68.20	-10.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

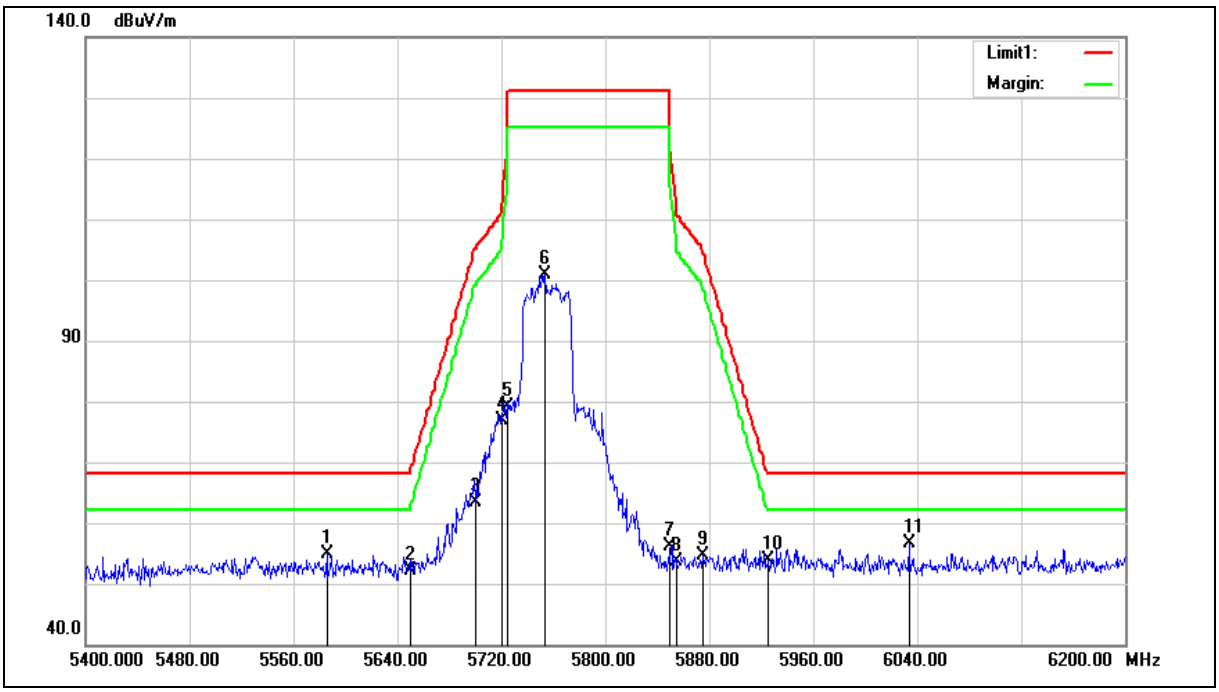

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5585.600	50.89	3.96	54.85	68.20	-13.35	peak
2	5650.000	47.97	4.06	52.03	68.20	-16.17	peak
3	5700.000	59.33	4.15	63.48	105.20	-41.72	peak
4	5720.000	72.82	4.18	77.00	110.80	-33.80	peak
5	5725.000	74.84	4.19	79.03	122.20	-43.17	peak
6	5753.600	96.65	4.24	100.89	--	--	peak
7	5850.000	51.66	4.40	56.06	122.20	-66.14	peak
8	5855.000	49.13	4.41	53.54	110.80	-57.26	peak
9	5875.000	50.10	4.44	54.54	105.20	-50.66	peak
10	5925.000	49.23	4.53	53.76	68.20	-14.44	peak
11	6033.600	51.95	4.76	56.71	68.20	-11.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

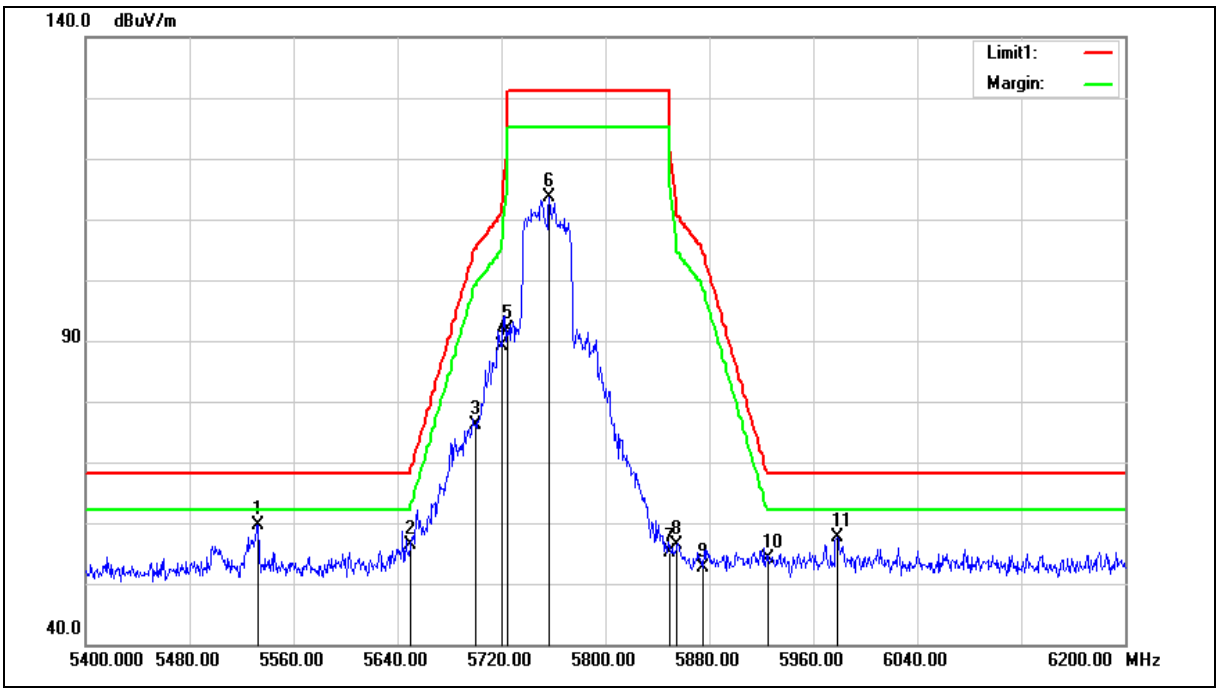

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5532.800	55.69	3.87	59.56	68.20	-8.64	peak
2	5650.000	52.34	4.06	56.40	68.20	-11.80	peak
3	5700.000	71.96	4.15	76.11	105.20	-29.09	peak
4	5720.000	84.99	4.18	89.17	110.80	-21.63	peak
5	5725.000	87.70	4.19	91.89	122.20	-30.31	peak
6	5756.800	109.45	4.25	113.70	--	--	peak
7	5850.000	50.67	4.40	55.07	122.20	-67.13	peak
8	5855.000	52.07	4.41	56.48	110.80	-54.32	peak
9	5875.000	48.27	4.44	52.71	105.20	-52.49	peak
10	5925.000	49.70	4.53	54.23	68.20	-13.97	peak
11	5978.400	52.99	4.61	57.60	68.20	-10.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

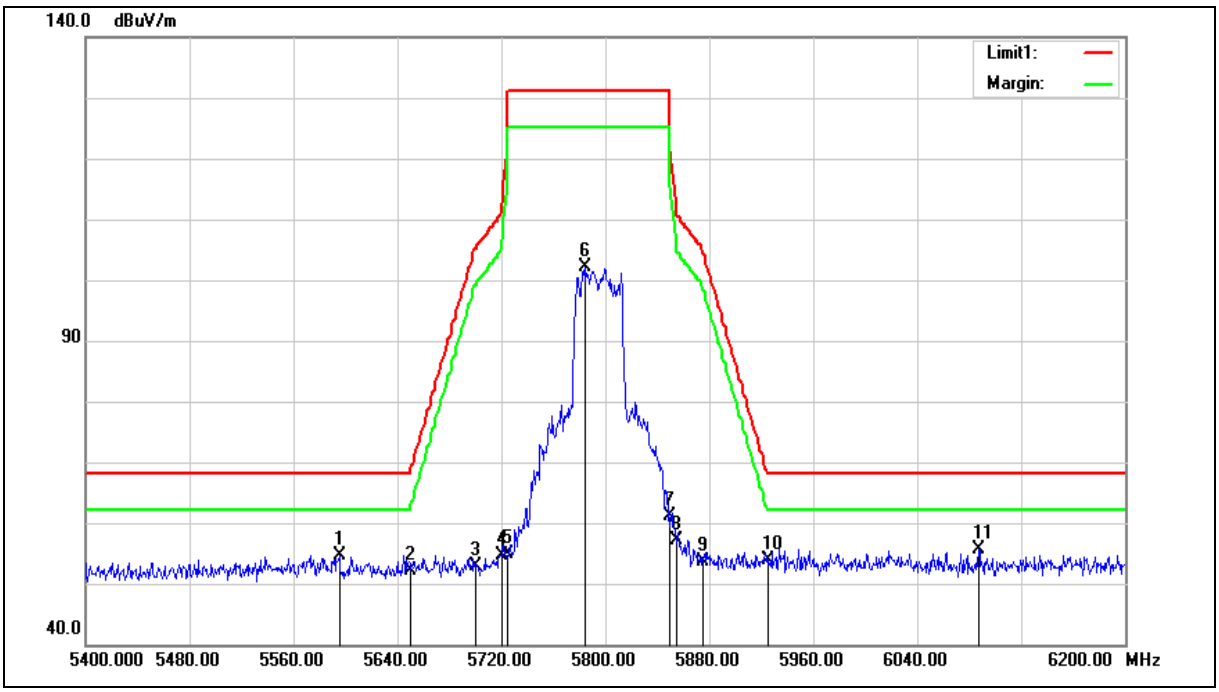

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5595.200	50.69	3.97	54.66	68.20	-13.54	peak
2	5650.000	48.09	4.06	52.15	68.20	-16.05	peak
3	5700.000	48.68	4.15	52.83	105.20	-52.37	peak
4	5720.000	50.47	4.18	54.65	110.80	-56.15	peak
5	5725.000	50.69	4.19	54.88	122.20	-67.32	peak
6	5784.800	97.90	4.29	102.19	--	--	peak
7	5850.000	56.69	4.40	61.09	122.20	-61.11	peak
8	5855.000	52.78	4.41	57.19	110.80	-53.61	peak
9	5875.000	49.16	4.44	53.60	105.20	-51.60	peak
10	5925.000	49.44	4.53	53.97	68.20	-14.23	peak
11	6087.200	50.78	4.93	55.71	68.20	-12.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

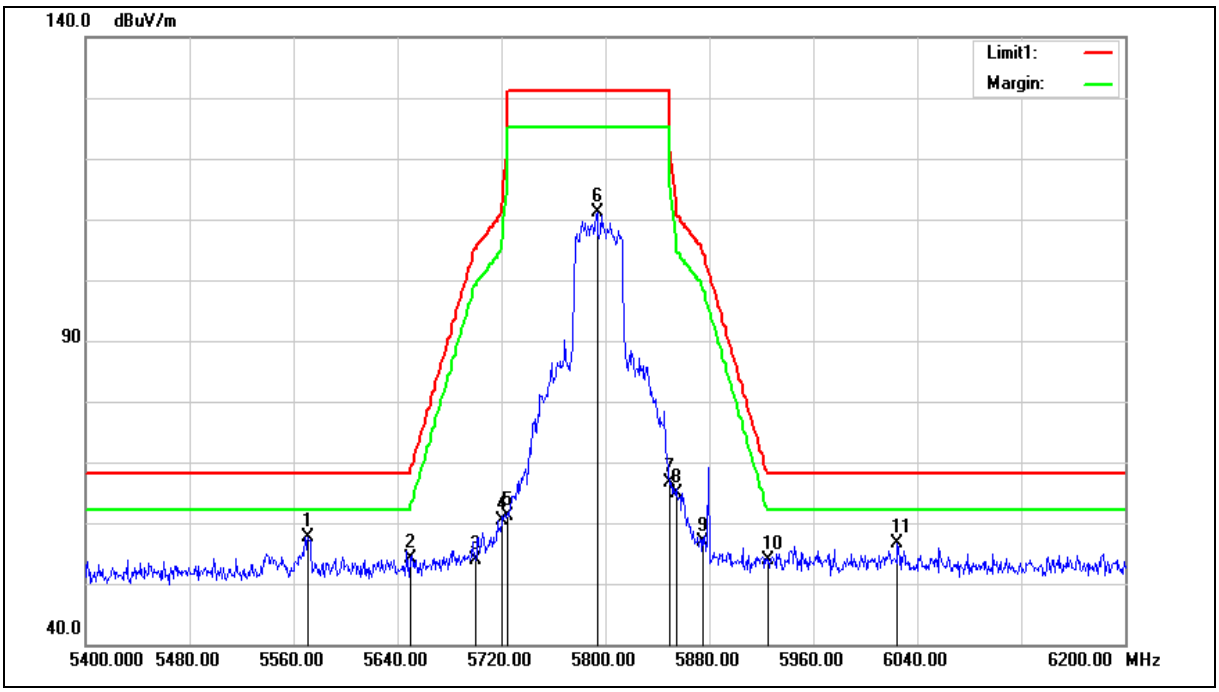

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5571.200	53.73	3.94	57.67	68.20	-10.53	peak
2	5650.000	50.05	4.06	54.11	68.20	-14.09	peak
3	5700.000	49.73	4.15	53.88	105.20	-51.32	peak
4	5720.000	56.15	4.18	60.33	110.80	-50.47	peak
5	5725.000	56.97	4.19	61.16	122.20	-61.04	peak
6	5793.600	106.89	4.30	111.19	--	--	peak
7	5850.000	62.24	4.40	66.64	122.20	-55.56	peak
8	5855.000	60.40	4.41	64.81	110.80	-45.99	peak
9	5875.000	52.34	4.44	56.78	105.20	-48.42	peak
10	5925.000	49.42	4.53	53.95	68.20	-14.25	peak
11	6024.800	51.82	4.73	56.55	68.20	-11.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

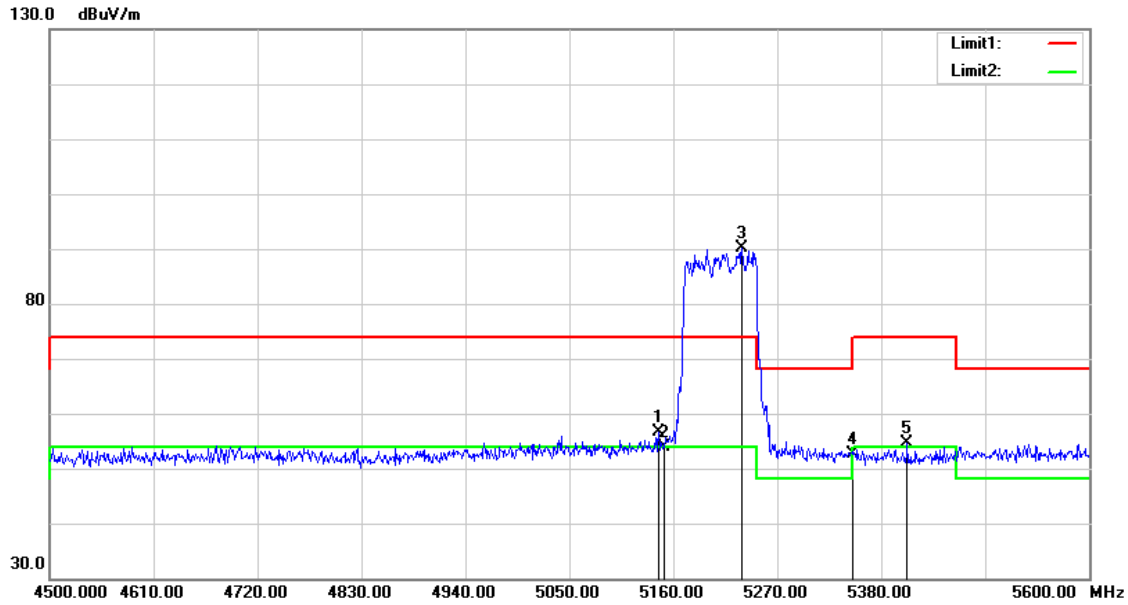


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.600	53.28	3.35	56.63	74.00	-17.37	peak
2	5150.000	50.61	3.35	53.96	74.00	-20.04	peak
3	5232.600	86.61	3.46	90.07	--	--	peak
4	5350.000	48.90	3.62	52.52	74.00	-21.48	peak
5	5407.500	50.82	3.70	54.52	74.00	-19.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

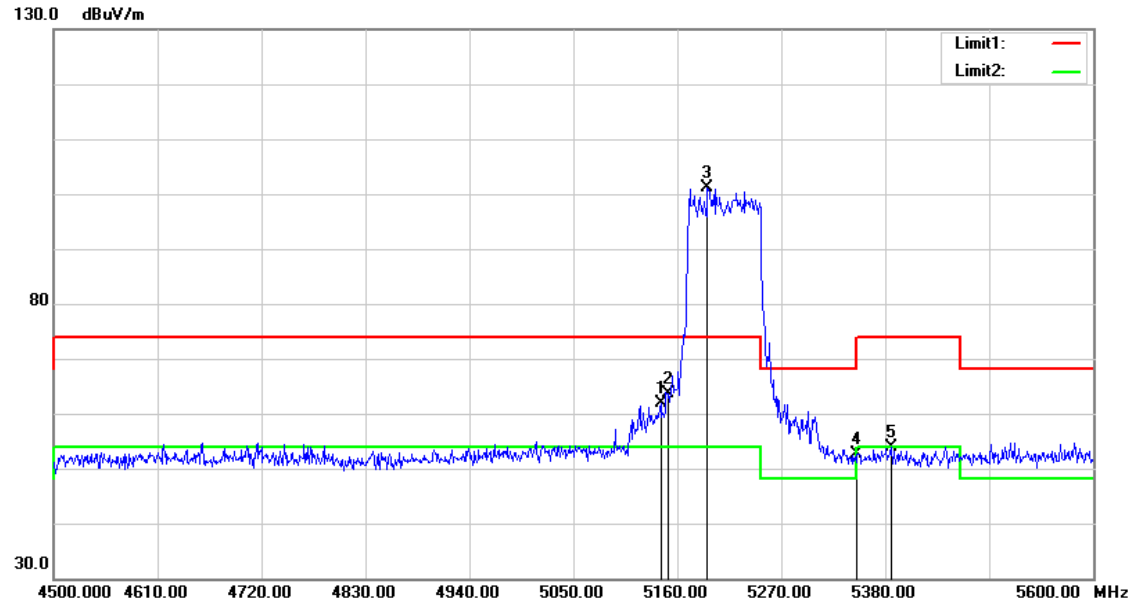


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	58.62	3.34	61.96	74.00	-12.04	peak
2	5150.000	60.30	3.35	63.65	74.00	-10.35	peak
3	5191.900	97.62	3.40	101.02	--	--	peak
4	5350.000	49.01	3.62	52.63	74.00	-21.37	peak
5	5386.600	50.10	3.67	53.77	74.00	-20.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

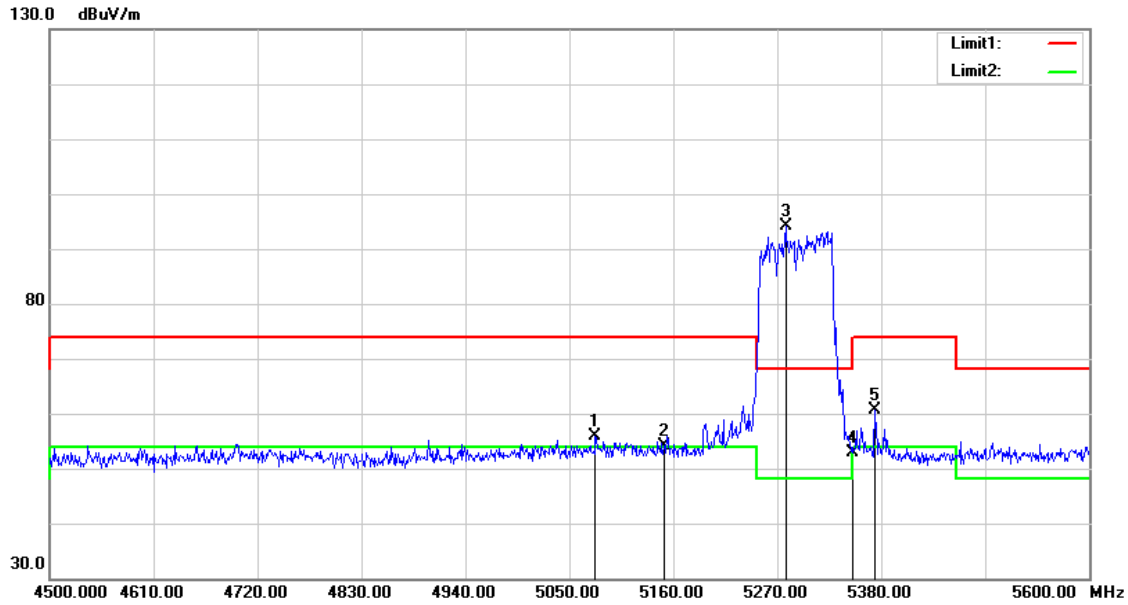


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	52.70	3.25	55.95	74.00	-18.05	peak
2	5150.000	50.75	3.35	54.10	74.00	-19.90	peak
3	5278.800	90.66	3.51	94.17	--	--	peak
4	5350.000	49.26	3.62	52.88	74.00	-21.12	peak
5	5373.400	57.01	3.65	60.66	74.00	-13.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

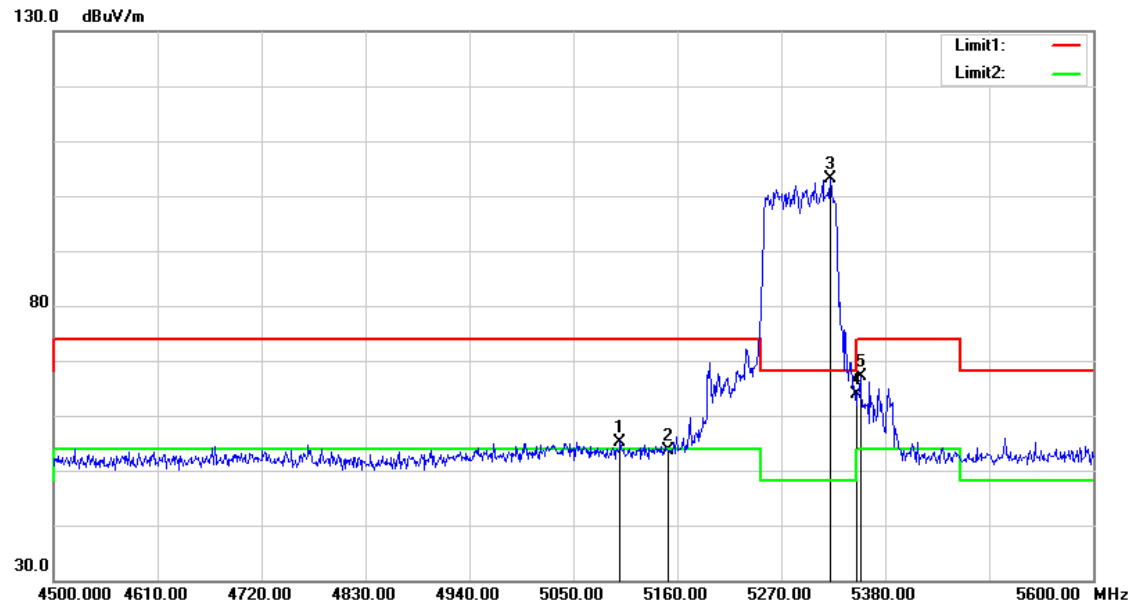


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5099.500	51.97	3.28	55.25	74.00	-18.75	peak
2	5150.000	50.27	3.35	53.62	74.00	-20.38	peak
3	5321.700	99.48	3.58	103.06	--	--	peak
4	5350.000	60.16	3.62	63.78	74.00	-10.22	peak
5	5353.600	63.46	3.62	67.08	74.00	-6.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

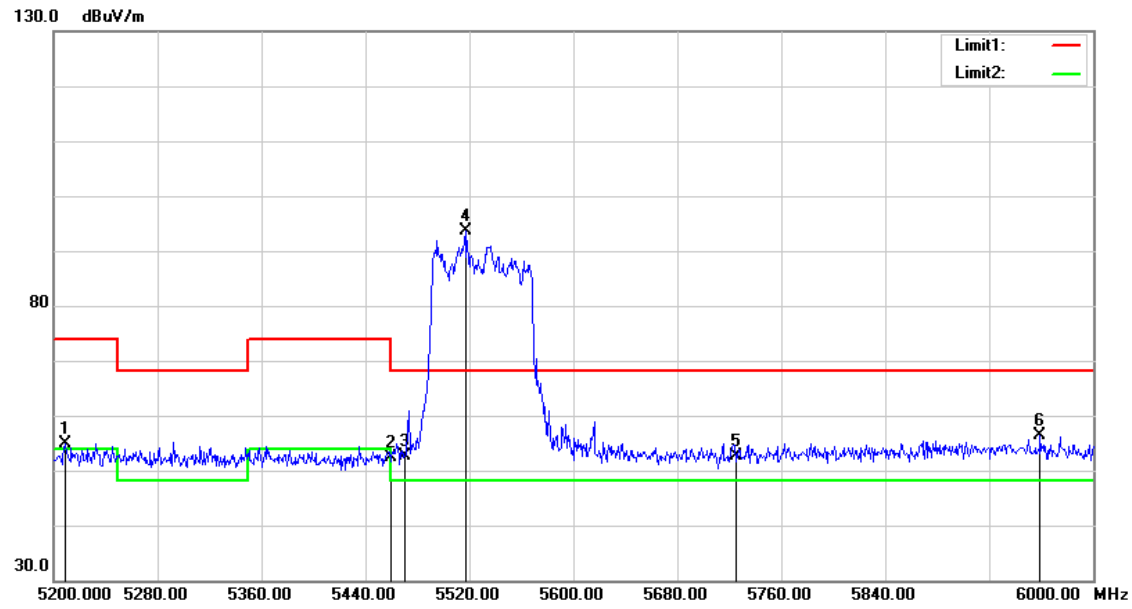


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	51.46	3.43	54.89	74.00	-19.11	peak
2	5460.000	48.71	3.76	52.47	74.00	-21.53	peak
3	5470.000	48.91	3.78	52.69	68.20	-15.51	peak
4	5516.800	89.84	3.85	93.69	--	--	peak
5	5725.000	48.33	4.19	52.52	68.20	-15.68	peak
6	5959.200	51.78	4.58	56.36	68.20	-11.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

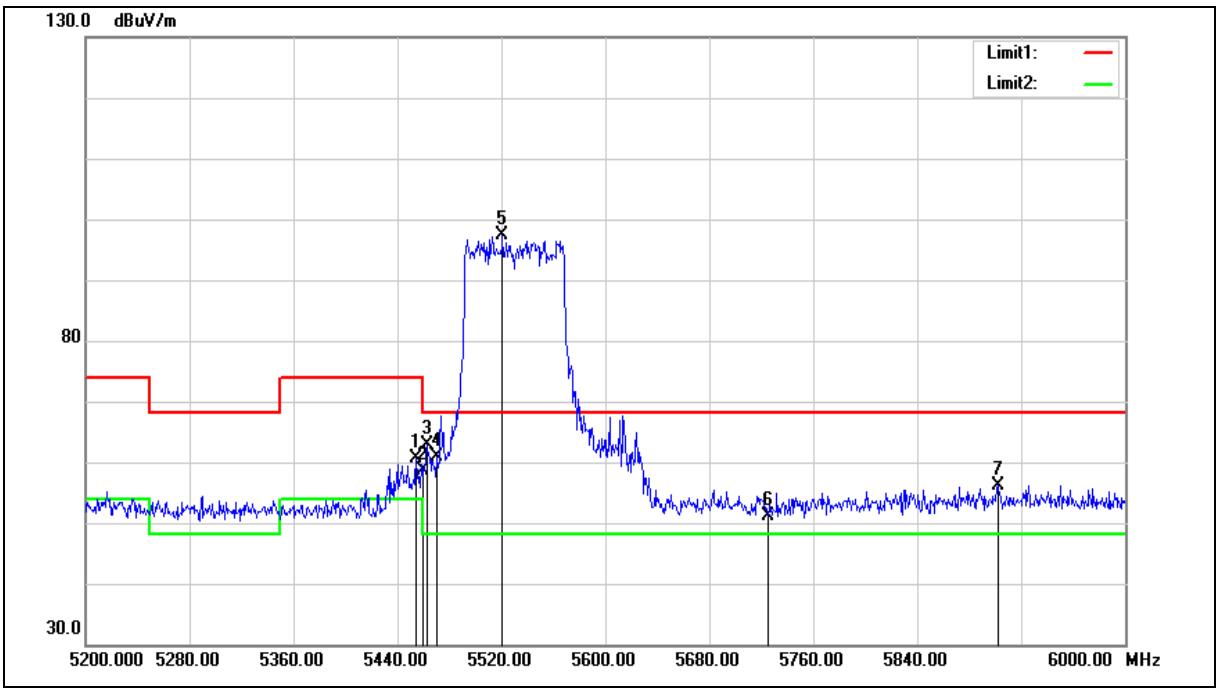

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	56.80	3.75	60.55	74.00	-13.45	peak
2	5460.000	54.81	3.76	58.57	74.00	-15.43	peak
3	5462.400	59.16	3.76	62.92	68.20	-5.28	peak
4	5470.000	57.02	3.78	60.80	68.20	-7.40	peak
5	5520.800	93.53	3.85	97.38	--	--	peak
6	5725.000	47.02	4.19	51.21	68.20	-16.99	peak
7	5902.400	51.53	4.49	56.02	68.20	-12.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

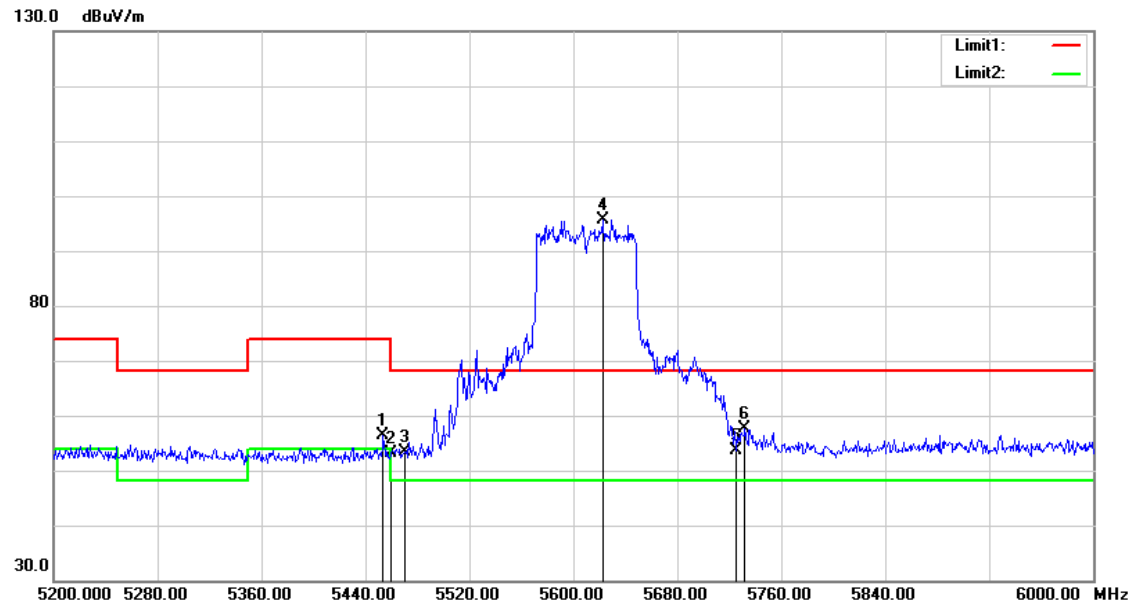


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.600	52.70	3.75	56.45	74.00	-17.55	peak
2	5460.000	49.49	3.76	53.25	74.00	-20.75	peak
3	5470.000	49.48	3.78	53.26	68.20	-14.94	peak
4	5622.400	91.69	4.02	95.71	--	--	peak
5	5725.000	49.53	4.19	53.72	68.20	-14.48	peak
6	5732.000	53.49	4.21	57.70	68.20	-10.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

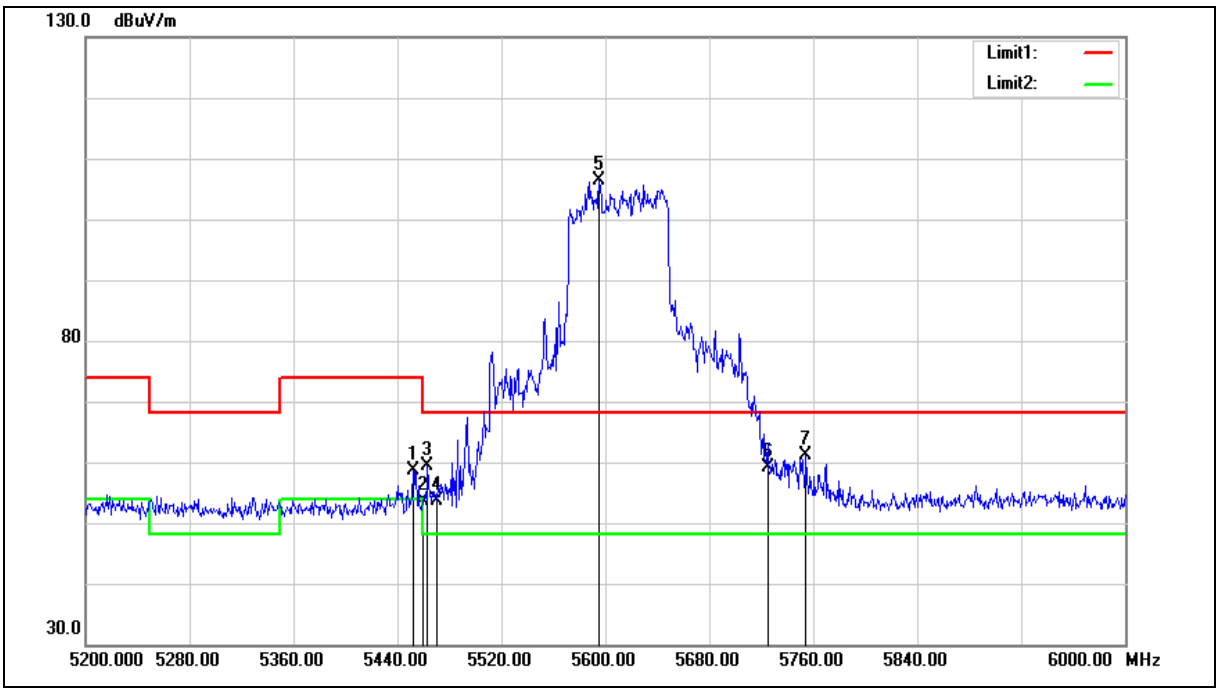

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.000	54.97	3.75	58.72	74.00	-15.28	peak
2	5460.000	49.89	3.76	53.65	74.00	-20.35	peak
3	5463.200	55.71	3.76	59.47	68.20	-8.73	peak
4	5470.000	49.74	3.78	53.52	68.20	-14.68	peak
5	5595.200	102.53	3.97	106.50	--	--	peak
6	5725.000	54.91	4.19	59.10	68.20	-9.10	peak
7	5754.400	56.80	4.25	61.05	68.20	-7.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

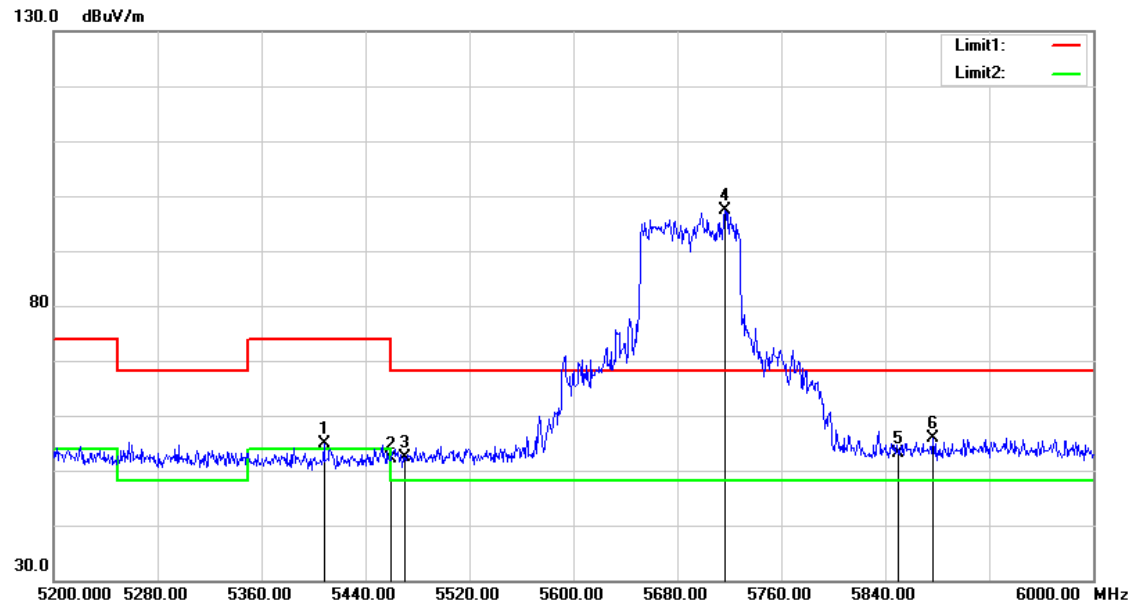


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5408.000	51.25	3.70	54.95	74.00	-19.05	peak
2	5460.000	48.26	3.76	52.02	74.00	-21.98	peak
3	5470.000	48.62	3.78	52.40	68.20	-15.80	peak
4	5716.800	93.12	4.18	97.30	--	--	peak
5	5850.000	48.69	4.40	53.09	68.20	-15.11	peak
6	5876.800	51.44	4.44	55.88	68.20	-12.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

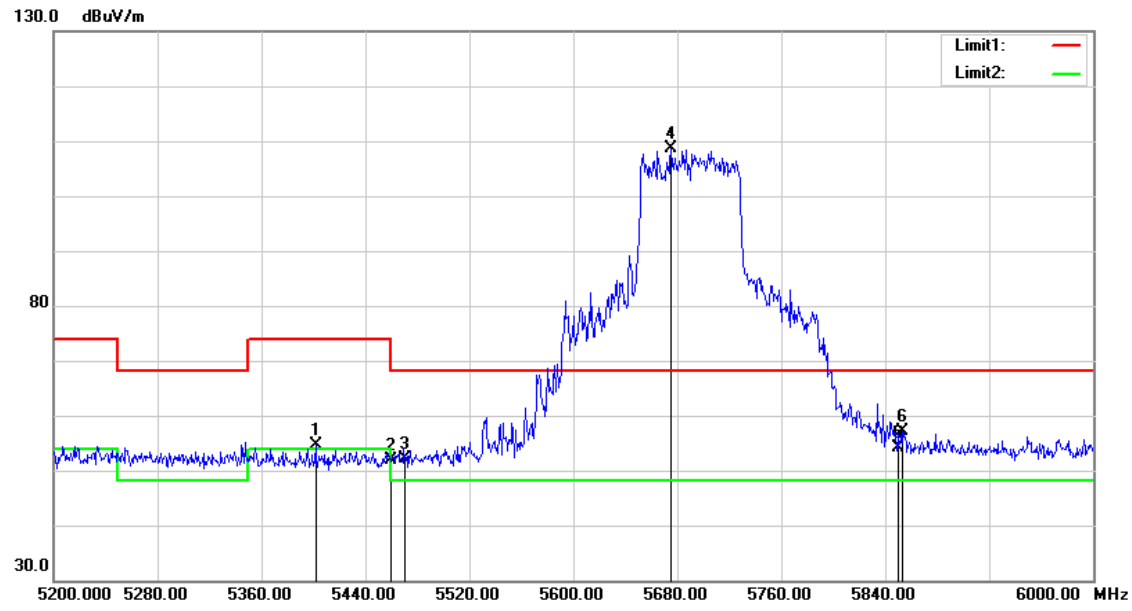


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.600	50.88	3.68	54.56	74.00	-19.44	peak
2	5460.000	48.00	3.76	51.76	74.00	-22.24	peak
3	5470.000	48.38	3.78	52.16	68.20	-16.04	peak
4	5675.200	104.59	4.10	108.69	--	--	peak
5	5850.000	49.72	4.40	54.12	68.20	-14.08	peak
6	5852.800	52.62	4.40	57.02	68.20	-11.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

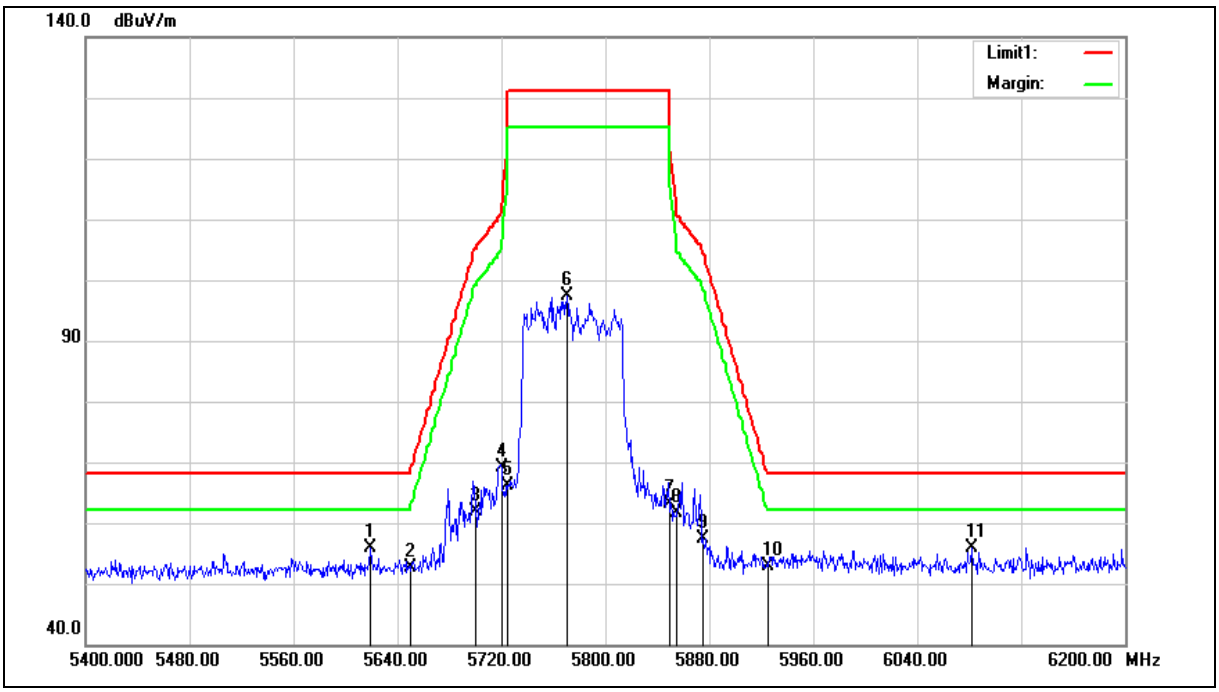

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5619.200	51.92	4.01	55.93	68.20	-12.27	peak
2	5650.000	48.60	4.06	52.66	68.20	-15.54	peak
3	5700.000	57.66	4.15	61.81	105.20	-43.39	peak
4	5720.000	65.07	4.18	69.25	110.80	-41.55	peak
5	5725.000	61.88	4.19	66.07	122.20	-56.13	peak
6	5770.400	93.13	4.26	97.39	--	--	peak
7	5850.000	58.83	4.40	63.23	122.20	-58.97	peak
8	5855.000	57.16	4.41	61.57	110.80	-49.23	peak
9	5875.000	52.87	4.44	57.31	105.20	-47.89	peak
10	5925.000	48.42	4.53	52.95	68.20	-15.25	peak
11	6081.600	51.07	4.92	55.99	68.20	-12.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

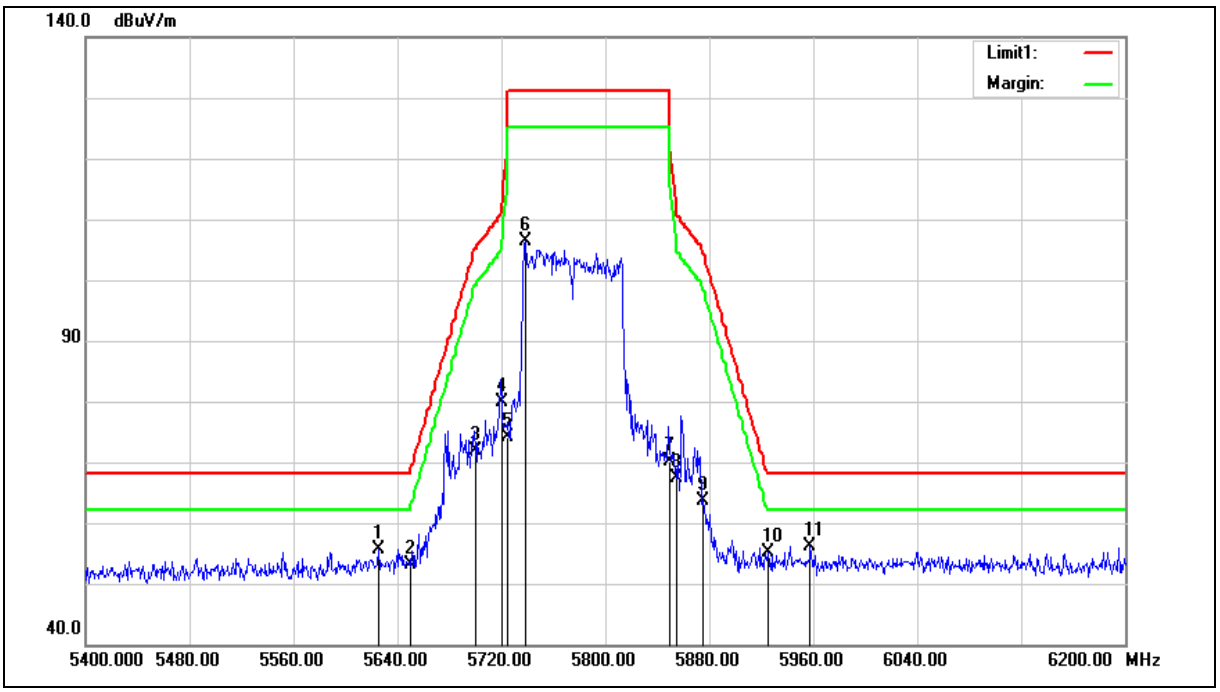

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.600	51.63	4.02	55.65	68.20	-12.55	peak
2	5650.000	48.97	4.06	53.03	68.20	-15.17	peak
3	5700.000	67.81	4.15	71.96	105.20	-33.24	peak
4	5720.000	75.70	4.18	79.88	110.80	-30.92	peak
5	5725.000	69.83	4.19	74.02	122.20	-48.18	peak
6	5738.400	102.12	4.22	106.34	--	--	peak
7	5850.000	65.74	4.40	70.14	122.20	-52.06	peak
8	5855.000	62.89	4.41	67.30	110.80	-43.50	peak
9	5875.000	59.09	4.44	63.53	105.20	-41.67	peak
10	5925.000	50.62	4.53	55.15	68.20	-13.05	peak
11	5957.600	51.48	4.58	56.06	68.20	-12.14	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

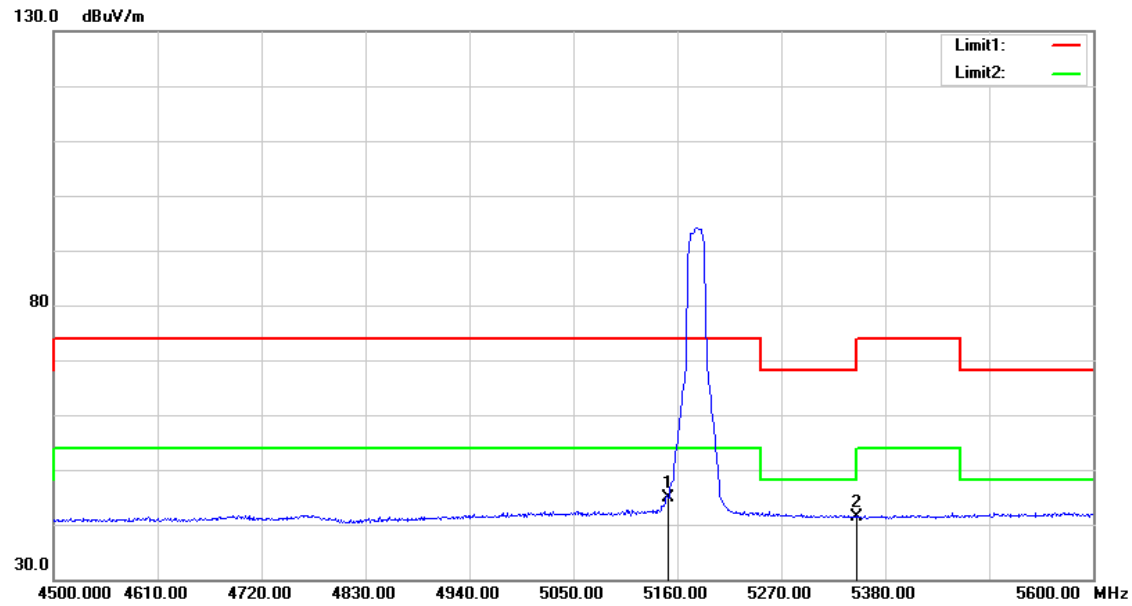


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	41.57	3.35	44.92	54.00	-9.08	AVG
2	5350.000	37.73	3.62	41.35	54.00	-12.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

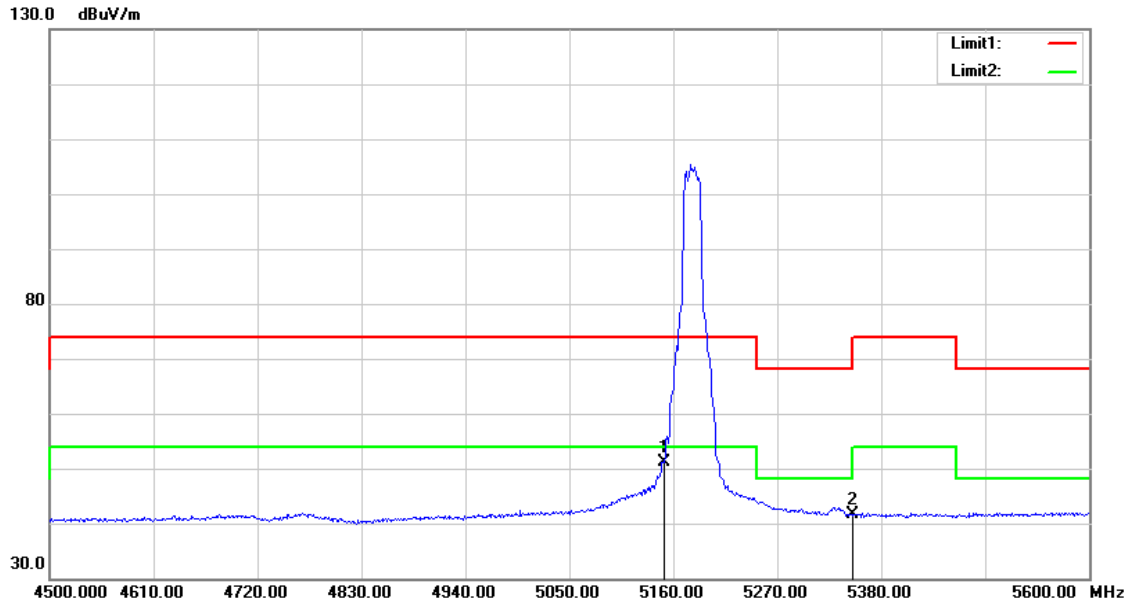


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	47.81	3.35	51.16	54.00	-2.84	AVG
2	5350.000	38.12	3.62	41.74	54.00	-12.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

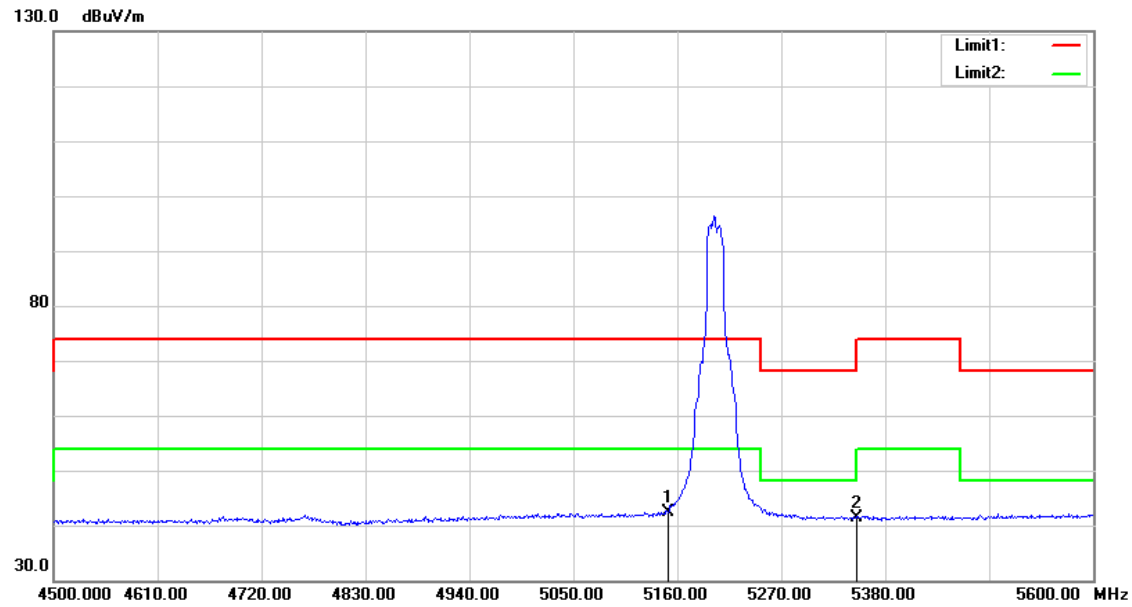


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.08	3.35	42.43	54.00	-11.57	AVG
2	5350.000	37.83	3.62	41.45	54.00	-12.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

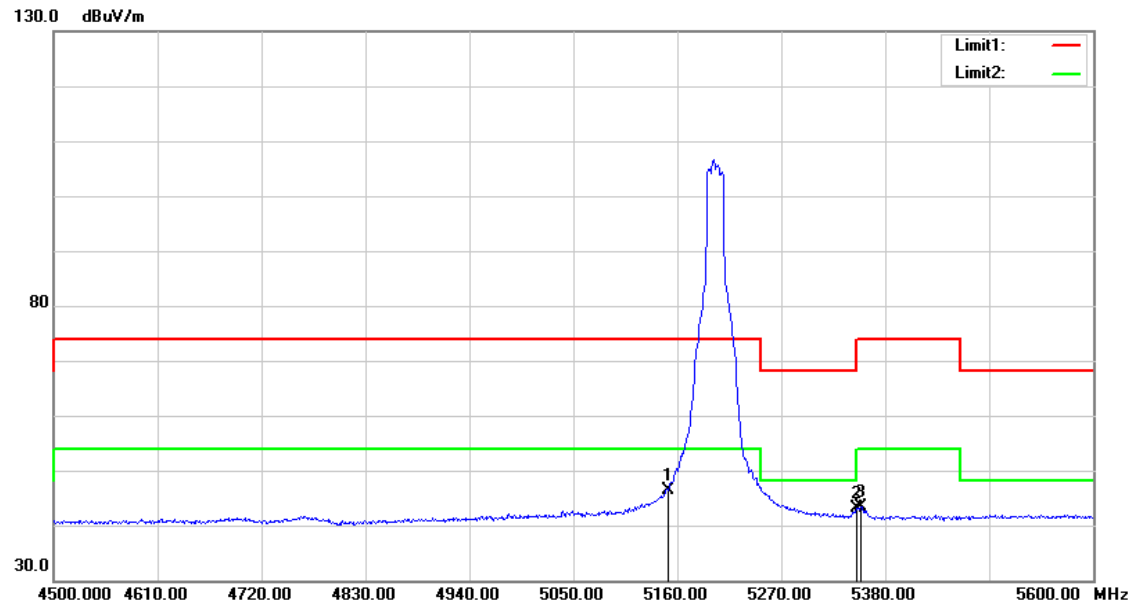


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	42.92	3.35	46.27	54.00	-7.73	AVG
2	5350.000	39.47	3.62	43.09	54.00	-10.91	AVG
3	5353.600	39.77	3.62	43.39	54.00	-10.61	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

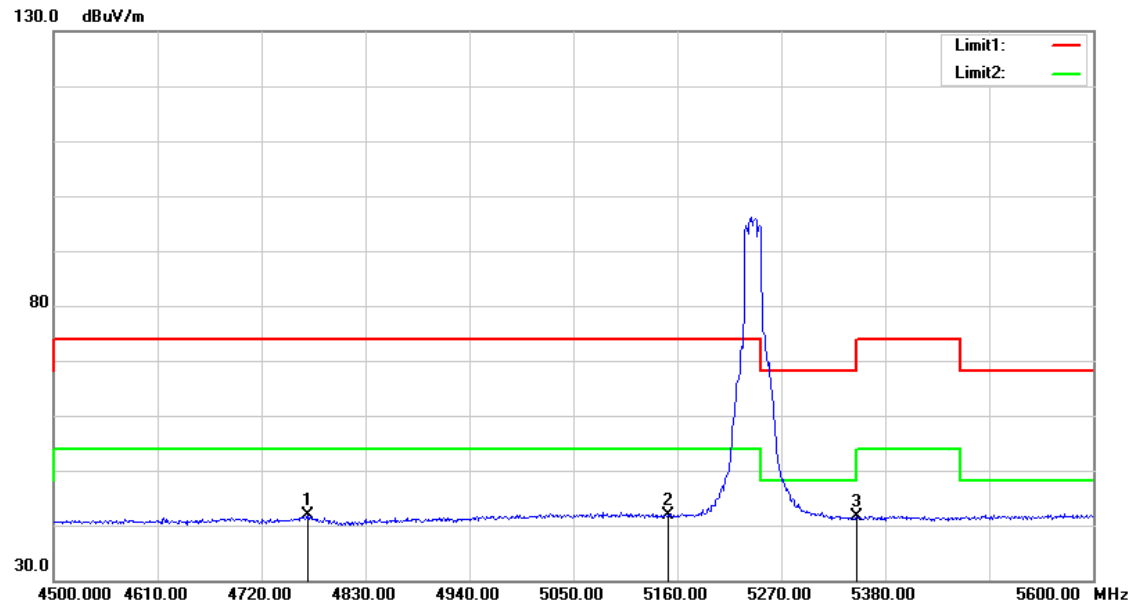


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4768.400	39.30	2.58	41.88	54.00	-12.12	AVG
2	5150.000	38.42	3.35	41.77	54.00	-12.23	AVG
3	5350.000	38.01	3.62	41.63	54.00	-12.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

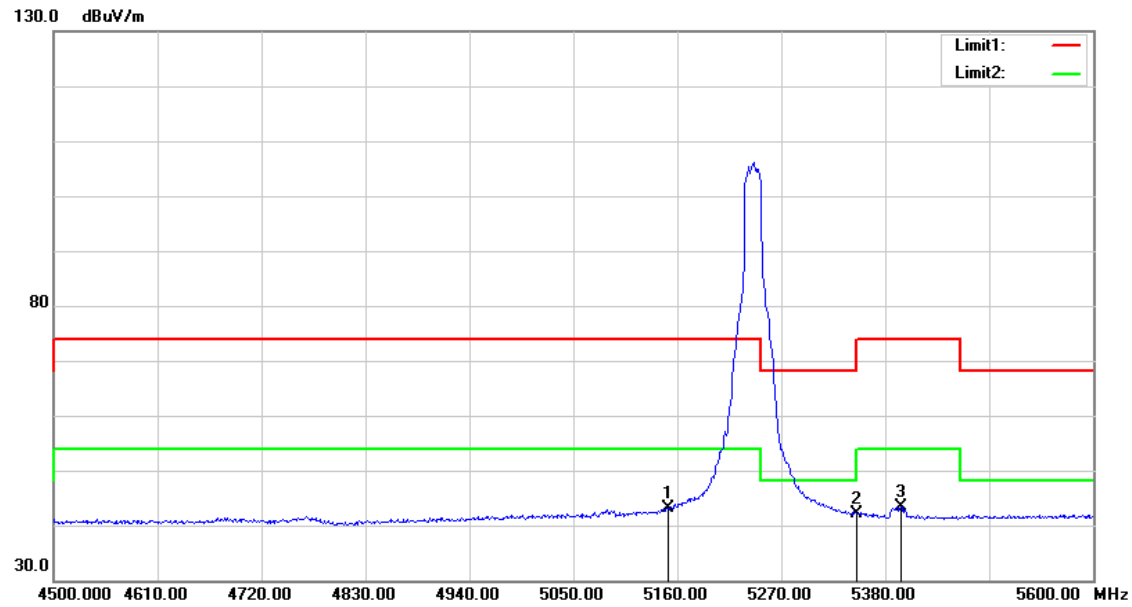


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.68	3.35	43.03	54.00	-10.97	AVG
2	5350.000	38.54	3.62	42.16	54.00	-11.84	AVG
3	5396.500	39.79	3.68	43.47	54.00	-10.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

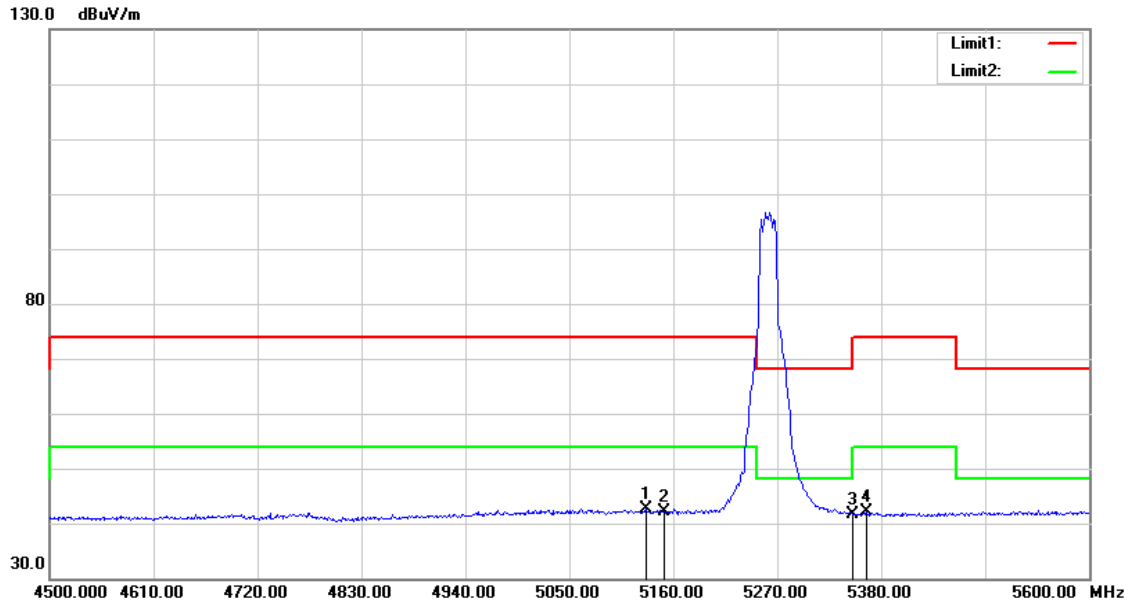


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.400	39.26	3.33	42.59	54.00	-11.41	AVG
2	5150.000	38.89	3.35	42.24	54.00	-11.76	AVG
3	5350.000	38.12	3.62	41.74	54.00	-12.26	AVG
4	5364.600	38.45	3.64	42.09	54.00	-11.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

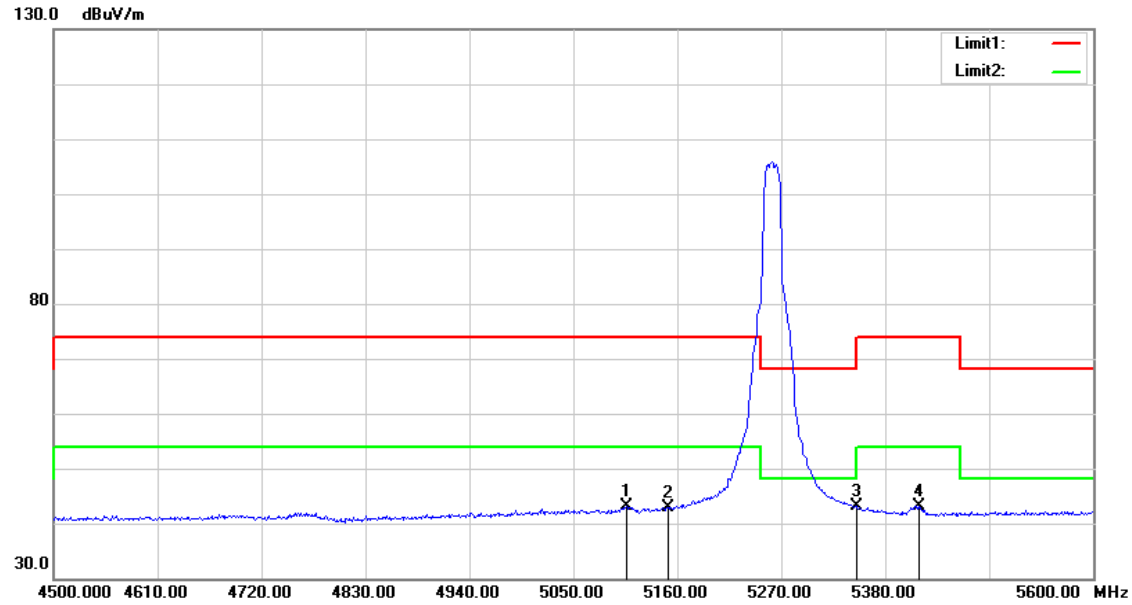


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5106.100	39.80	3.29	43.09	54.00	-10.91	AVG
2	5150.000	39.58	3.35	42.93	54.00	-11.07	AVG
3	5350.000	39.54	3.62	43.16	54.00	-10.84	AVG
4	5415.200	39.43	3.70	43.13	54.00	-10.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

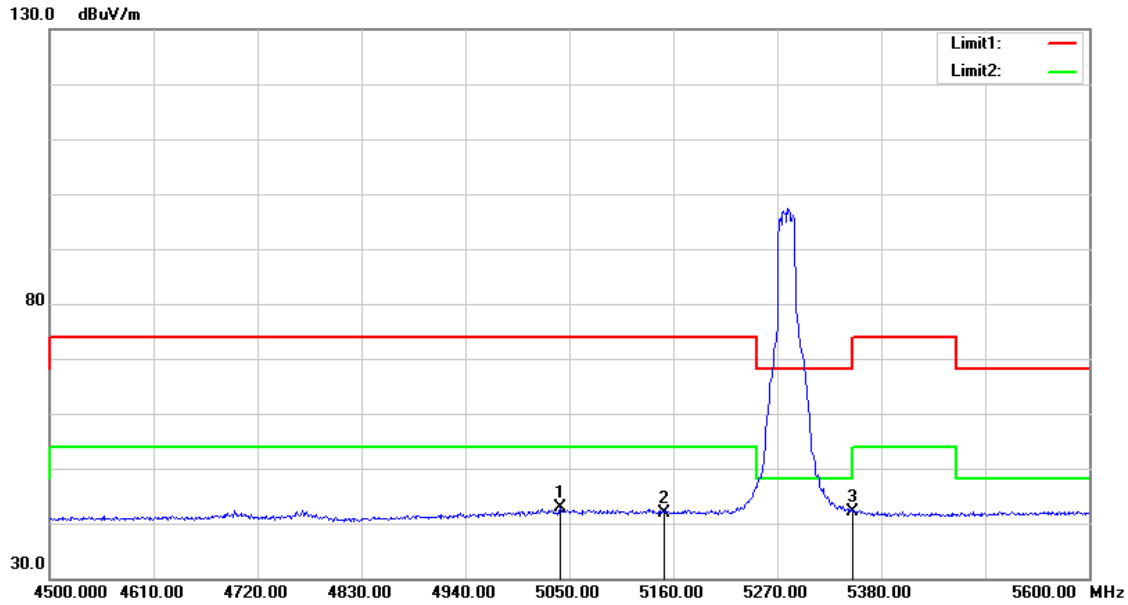


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5040.100	39.58	3.20	42.78	54.00	-11.22	AVG
2	5150.000	38.52	3.35	41.87	54.00	-12.13	AVG
3	5350.000	38.48	3.62	42.10	54.00	-11.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

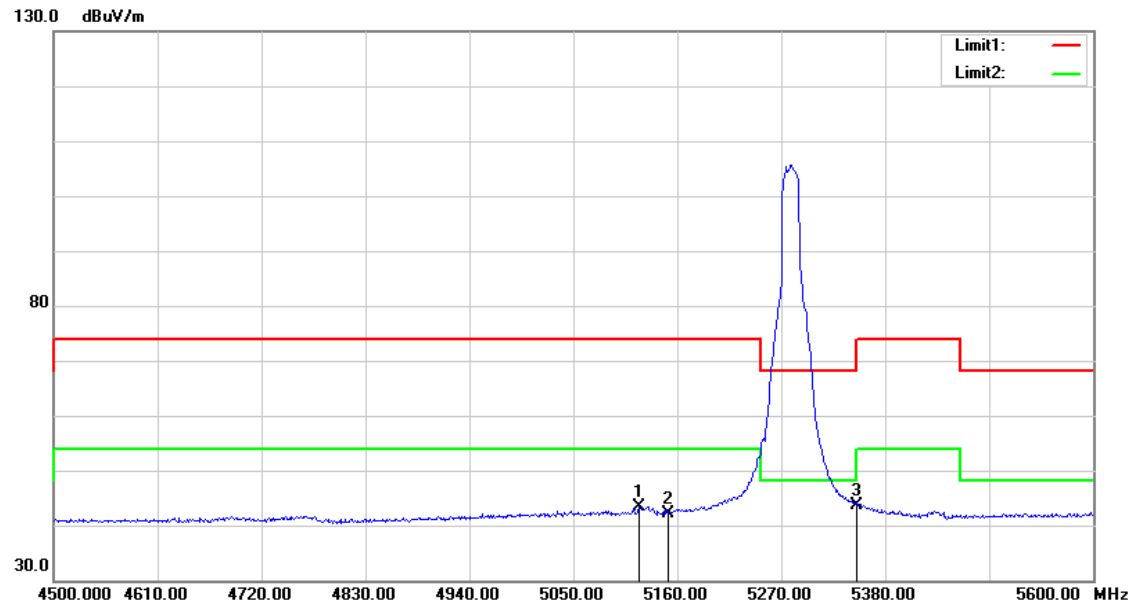


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	40.02	3.32	43.34	54.00	-10.66	AVG
2	5150.000	38.88	3.35	42.23	54.00	-11.77	AVG
3	5350.000	40.13	3.62	43.75	54.00	-10.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

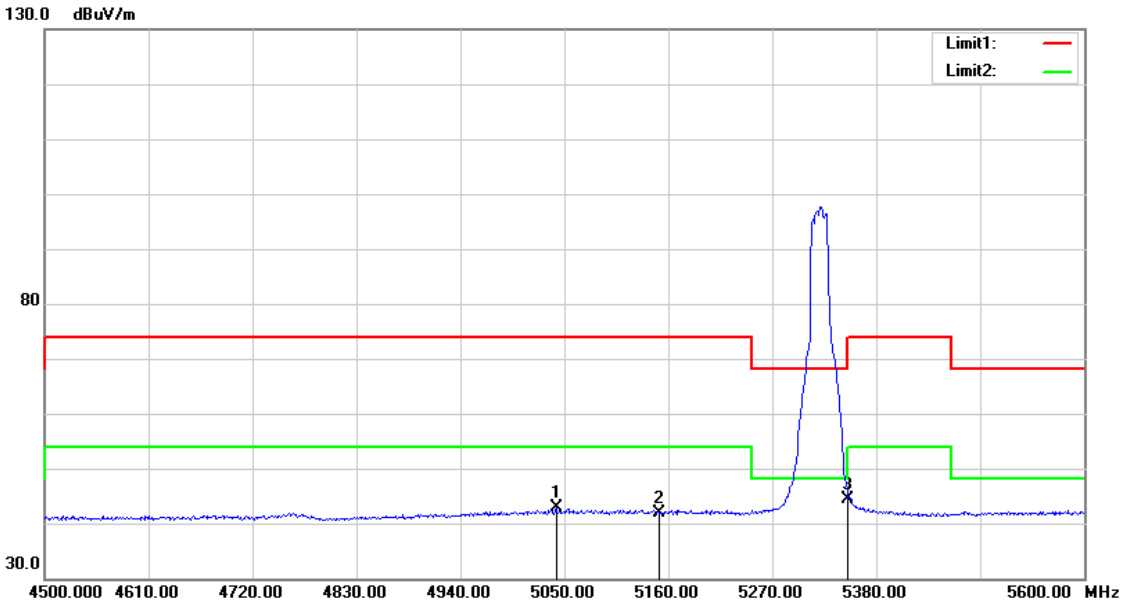


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5041.200	39.67	3.20	42.87	54.00	-11.13	AVG
2	5150.000	38.61	3.35	41.96	54.00	-12.04	AVG
3	5350.000	40.83	3.62	44.45	54.00	-9.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

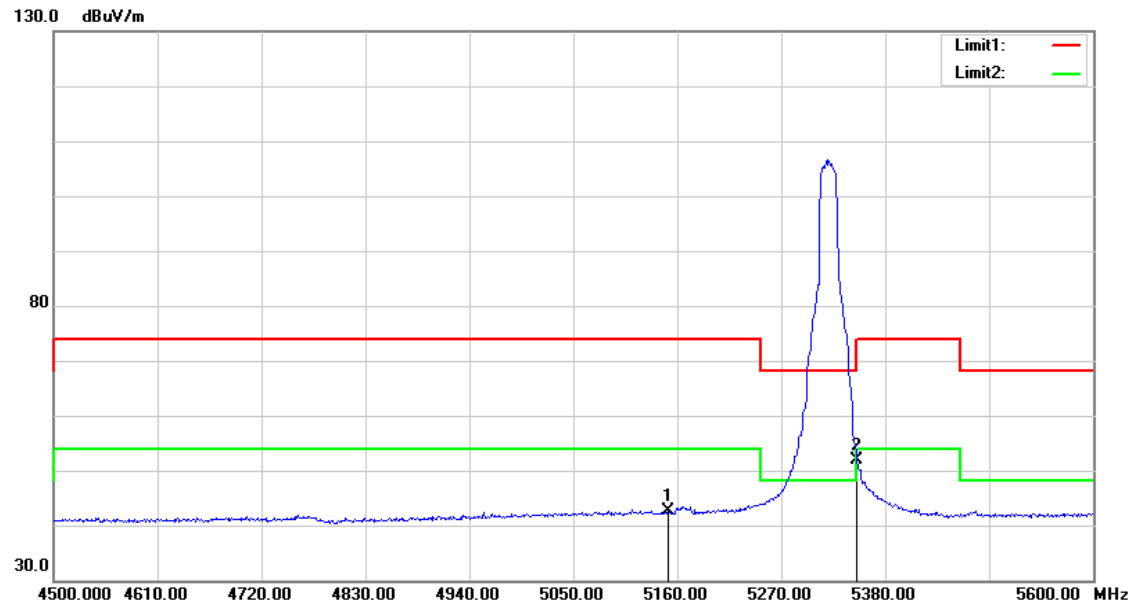


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.21	3.35	42.56	54.00	-11.44	AVG
2	5350.000	48.36	3.62	51.98	54.00	-2.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

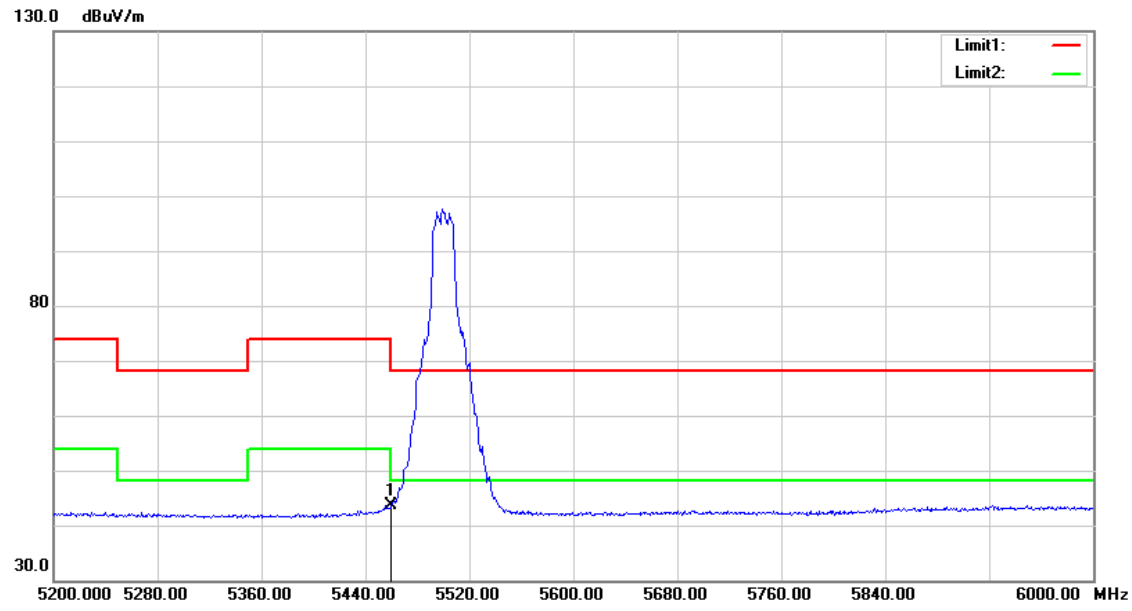


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	39.94	3.76	43.70	54.00	-10.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

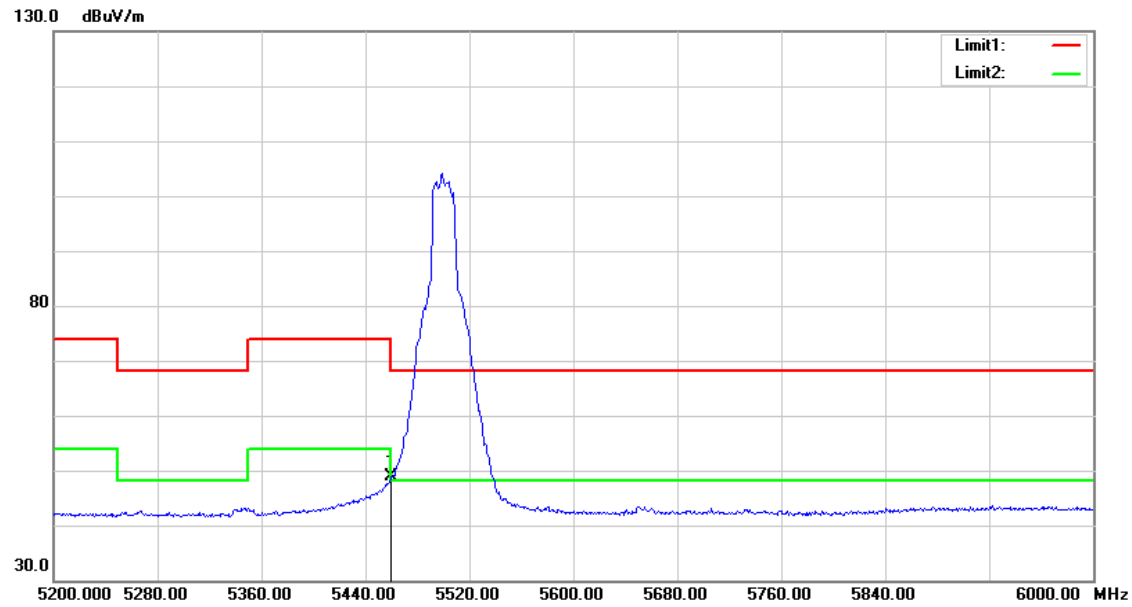


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	45.00	3.76	48.76	54.00	-5.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

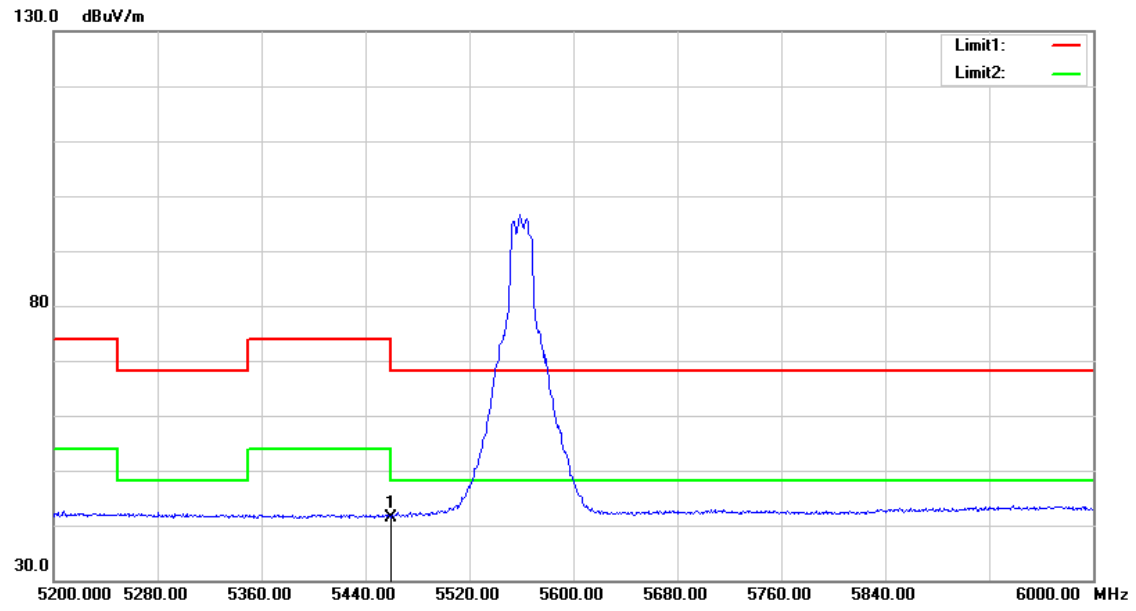


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.72	3.76	41.48	54.00	-12.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

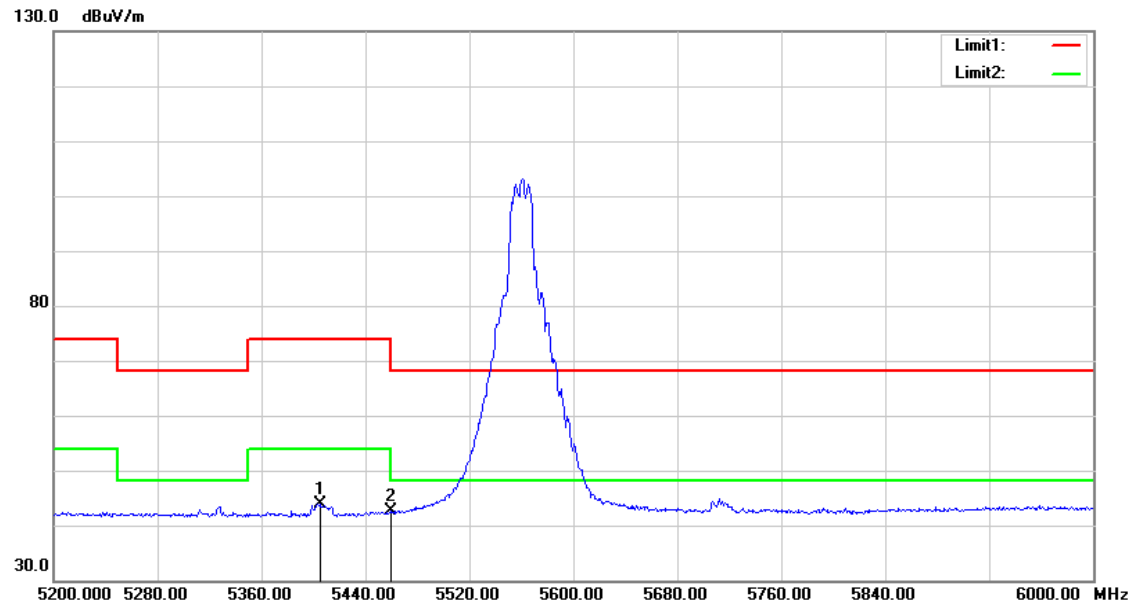


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5404.800	40.22	3.68	43.90	54.00	-10.10	AVG
2	5460.000	38.84	3.76	42.60	54.00	-11.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

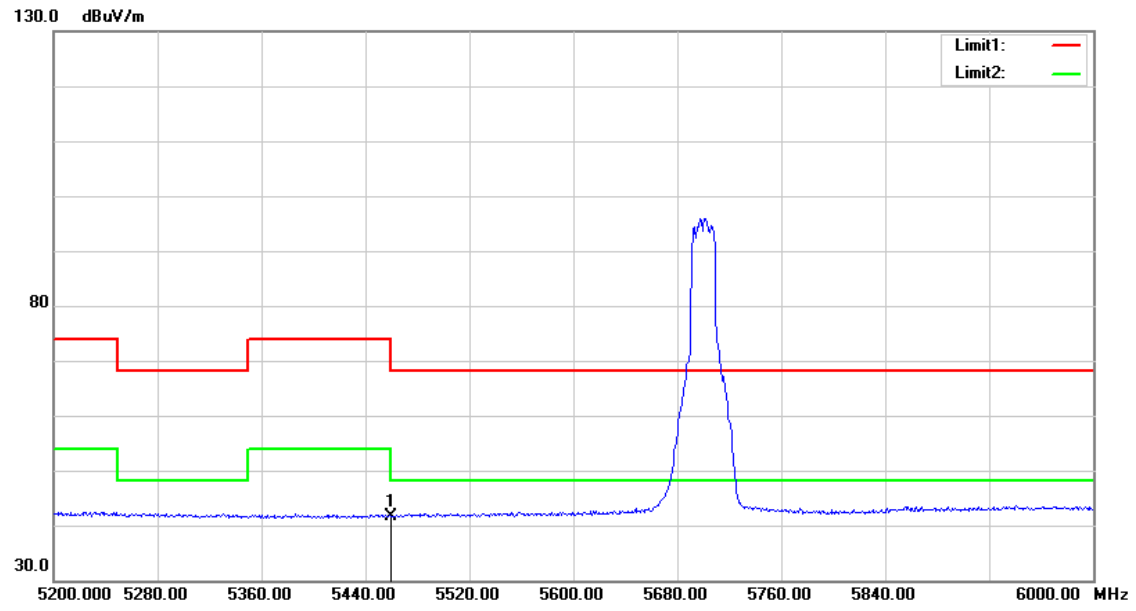


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.79	3.76	41.55	54.00	-12.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

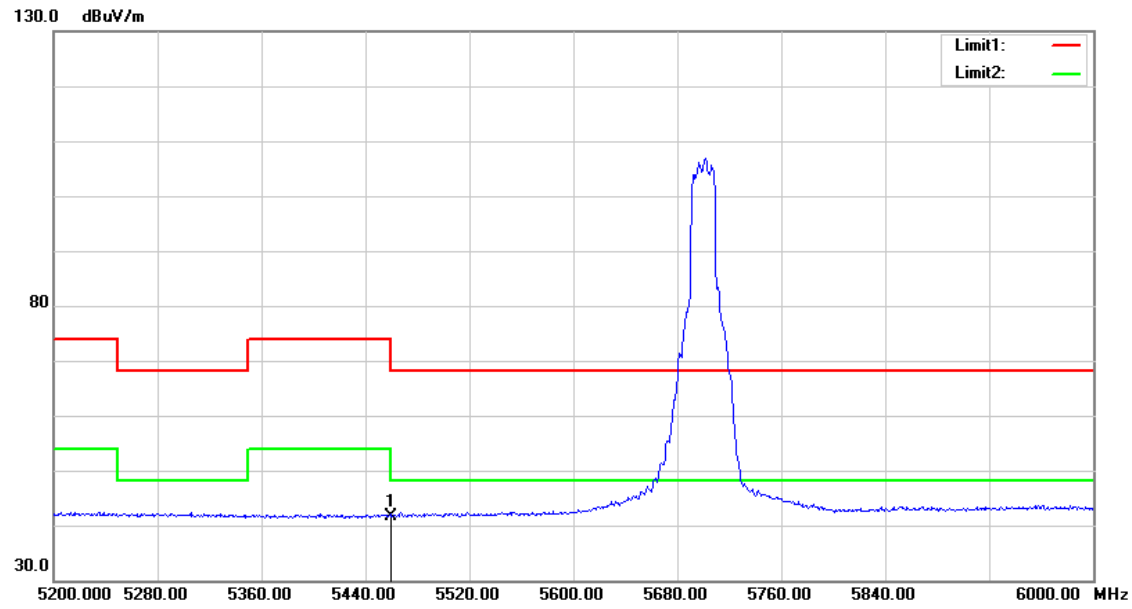


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.92	3.76	41.68	54.00	-12.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

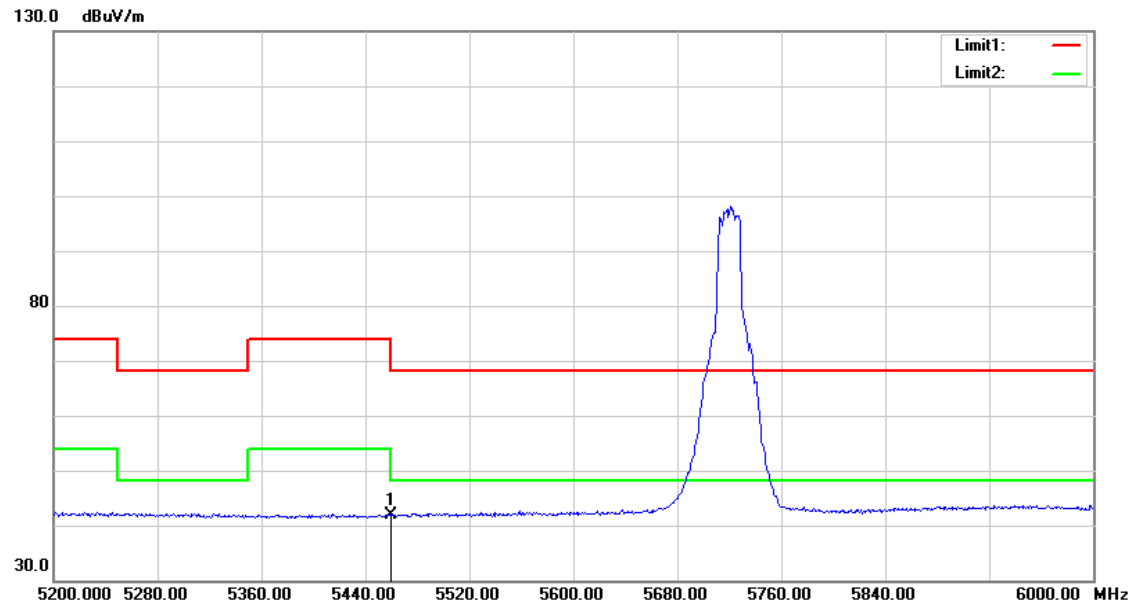


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.24	3.76	42.00	54.00	-12.00	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

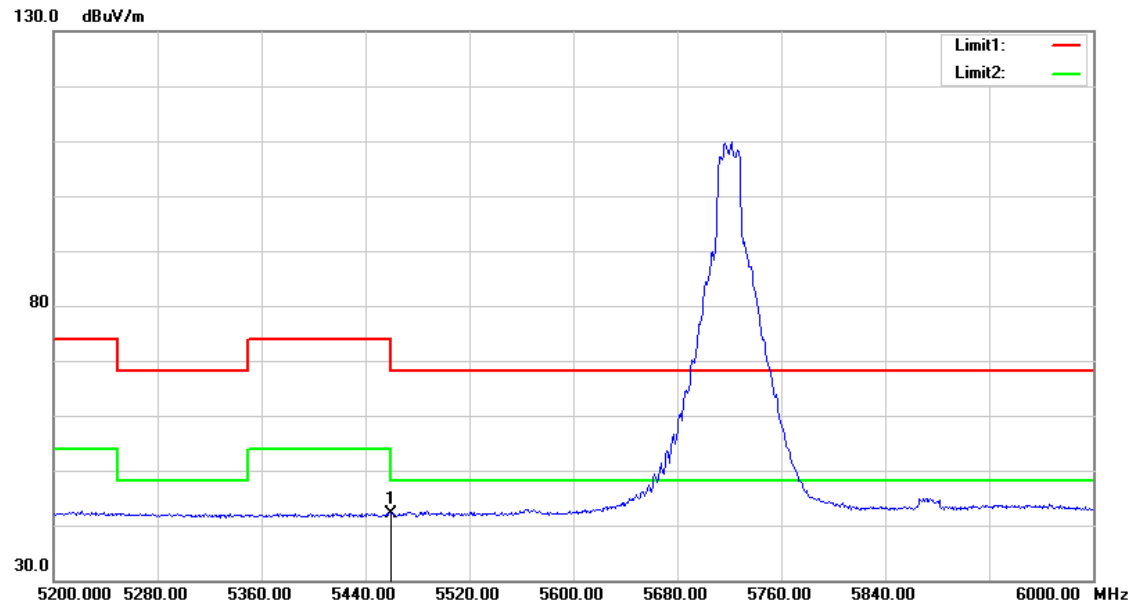


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.39	3.76	42.15	54.00	-11.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

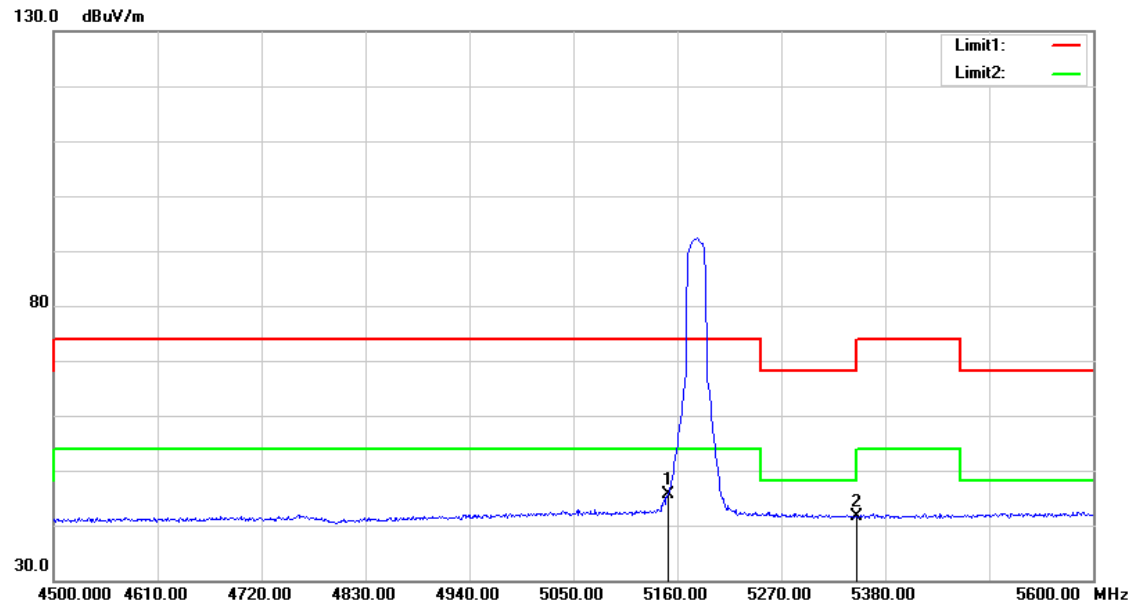


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	42.35	3.35	45.70	54.00	-8.30	AVG
2	5350.000	38.03	3.62	41.65	54.00	-12.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

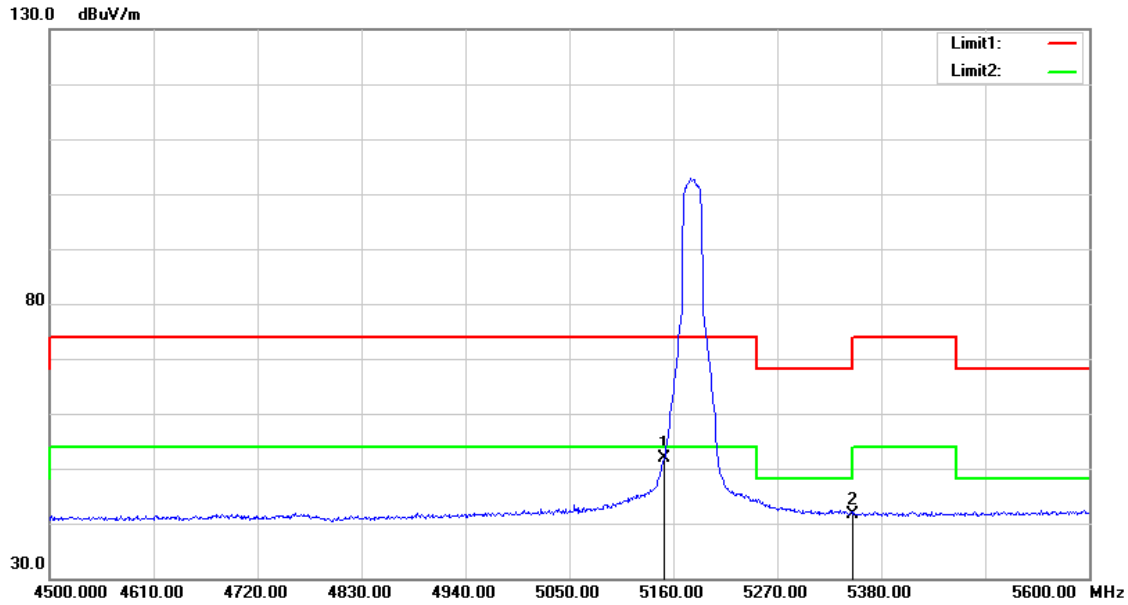


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	48.56	3.35	51.91	54.00	-2.09	AVG
2	5350.000	37.97	3.62	41.59	54.00	-12.41	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

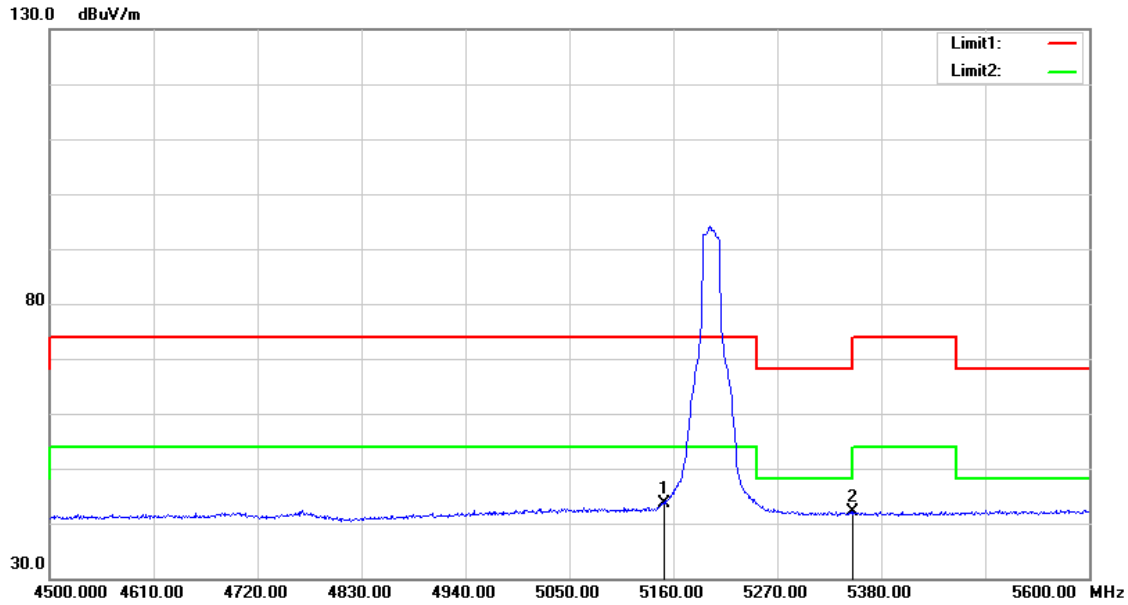


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	40.17	3.35	43.52	54.00	-10.48	AVG
2	5350.000	38.43	3.62	42.05	54.00	-11.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

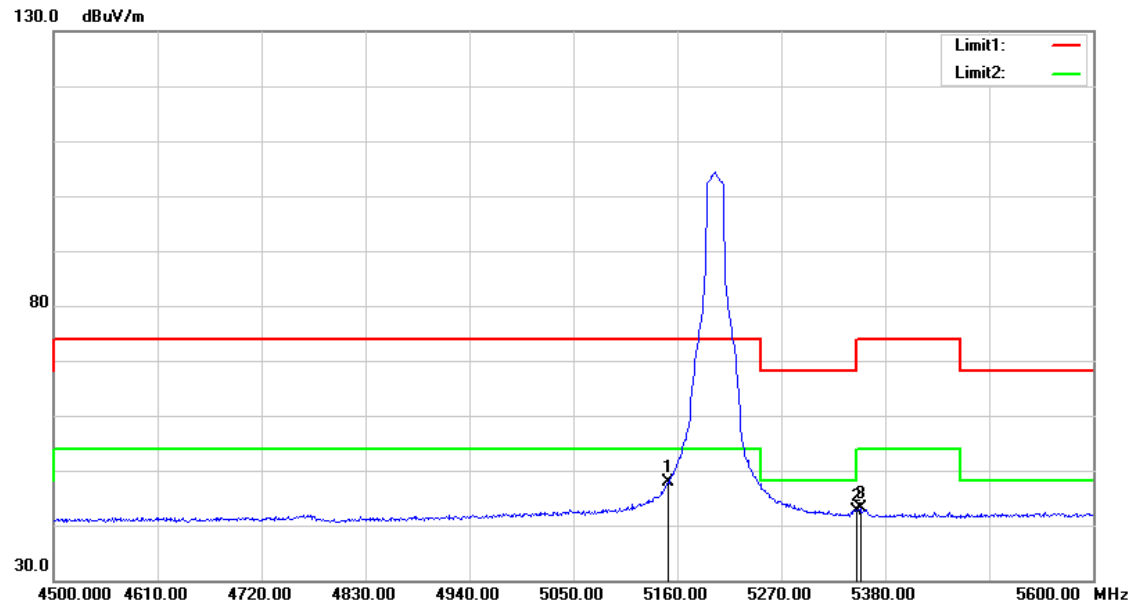


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	44.45	3.35	47.80	54.00	-6.20	AVG
2	5350.000	39.12	3.62	42.74	54.00	-11.26	AVG
3	5353.600	39.54	3.62	43.16	54.00	-10.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

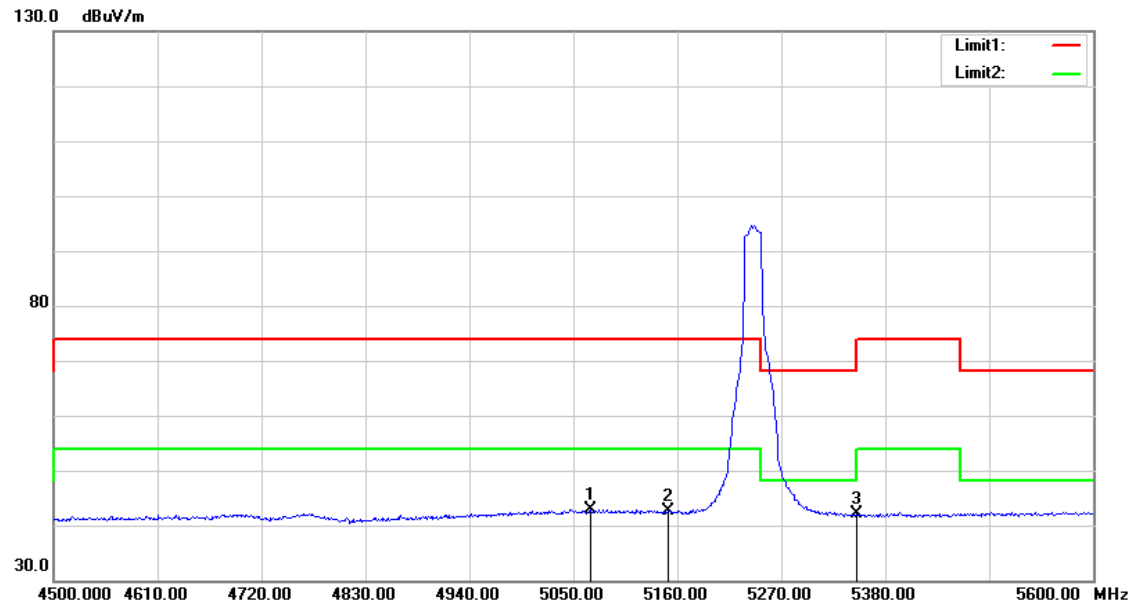


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5067.600	39.77	3.23	43.00	54.00	-11.00	AVG
2	5150.000	39.30	3.35	42.65	54.00	-11.35	AVG
3	5350.000	38.45	3.62	42.07	54.00	-11.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

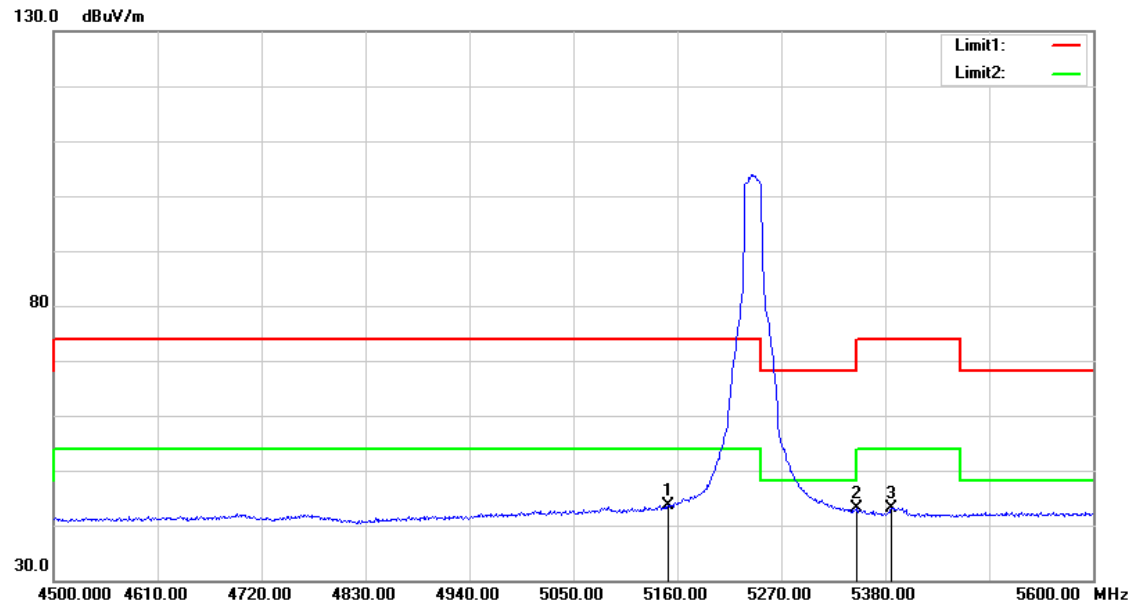


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	40.33	3.35	43.68	54.00	-10.32	AVG
2	5350.000	39.45	3.62	43.07	54.00	-10.93	AVG
3	5386.600	39.57	3.67	43.24	54.00	-10.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

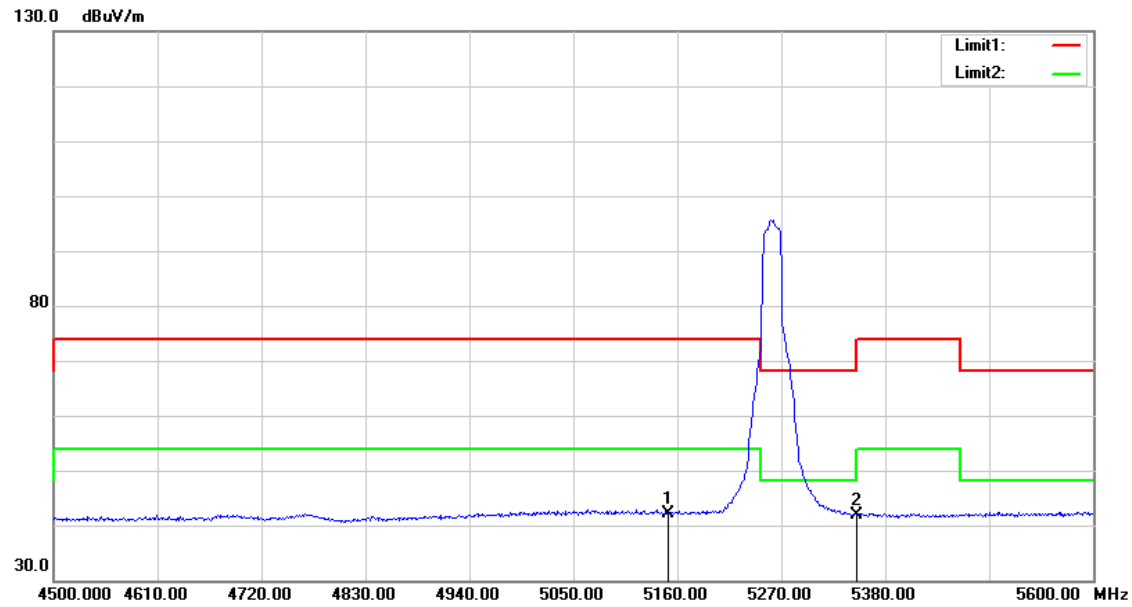


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.80	3.35	42.15	54.00	-11.85	AVG
2	5350.000	38.36	3.62	41.98	54.00	-12.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

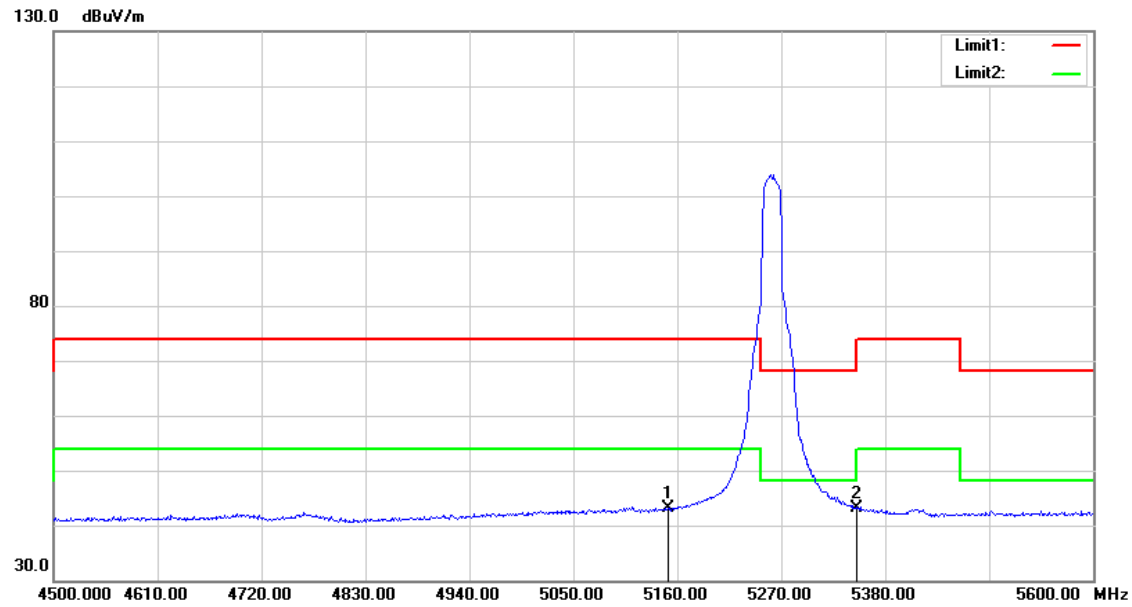


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.69	3.35	43.04	54.00	-10.96	AVG
2	5350.000	39.56	3.62	43.18	54.00	-10.82	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

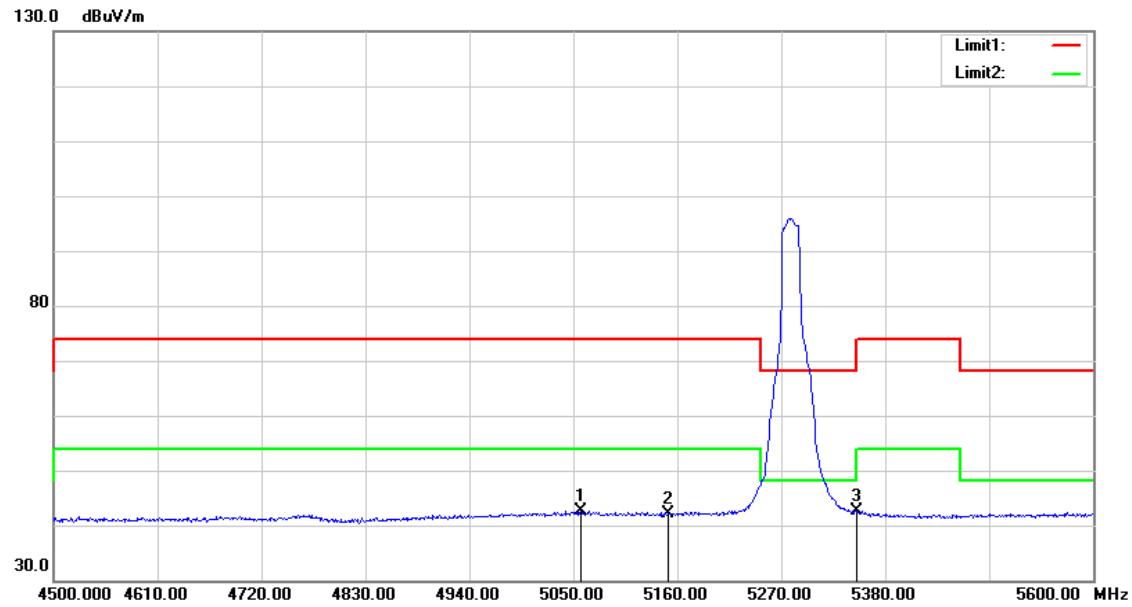


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.700	39.33	3.23	42.56	54.00	-11.44	AVG
2	5150.000	38.79	3.35	42.14	54.00	-11.86	AVG
3	5350.000	38.90	3.62	42.52	54.00	-11.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

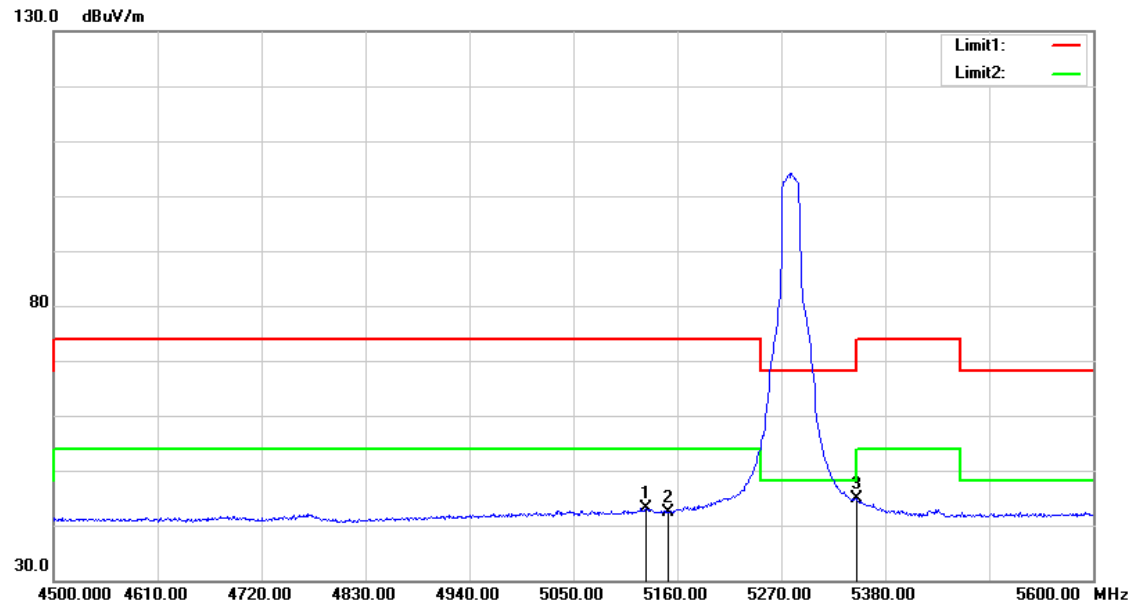


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.000	39.73	3.32	43.05	54.00	-10.95	AVG
2	5150.000	39.08	3.35	42.43	54.00	-11.57	AVG
3	5350.000	41.26	3.62	44.88	54.00	-9.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

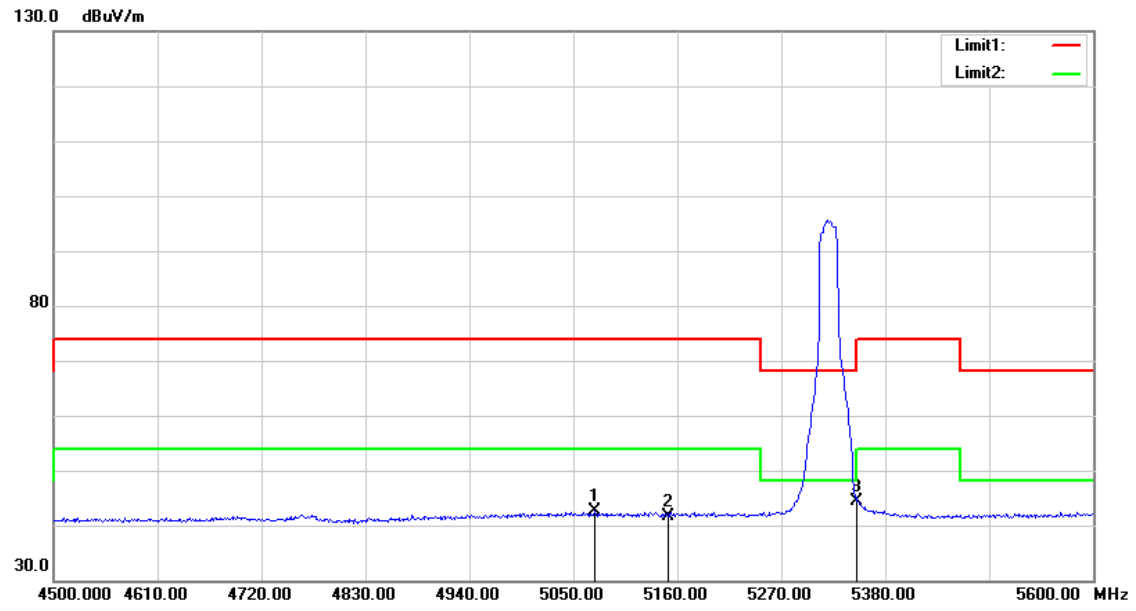


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5072.000	39.46	3.24	42.70	54.00	-11.30	AVG
2	5150.000	38.39	3.35	41.74	54.00	-12.26	AVG
3	5350.000	40.85	3.62	44.47	54.00	-9.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

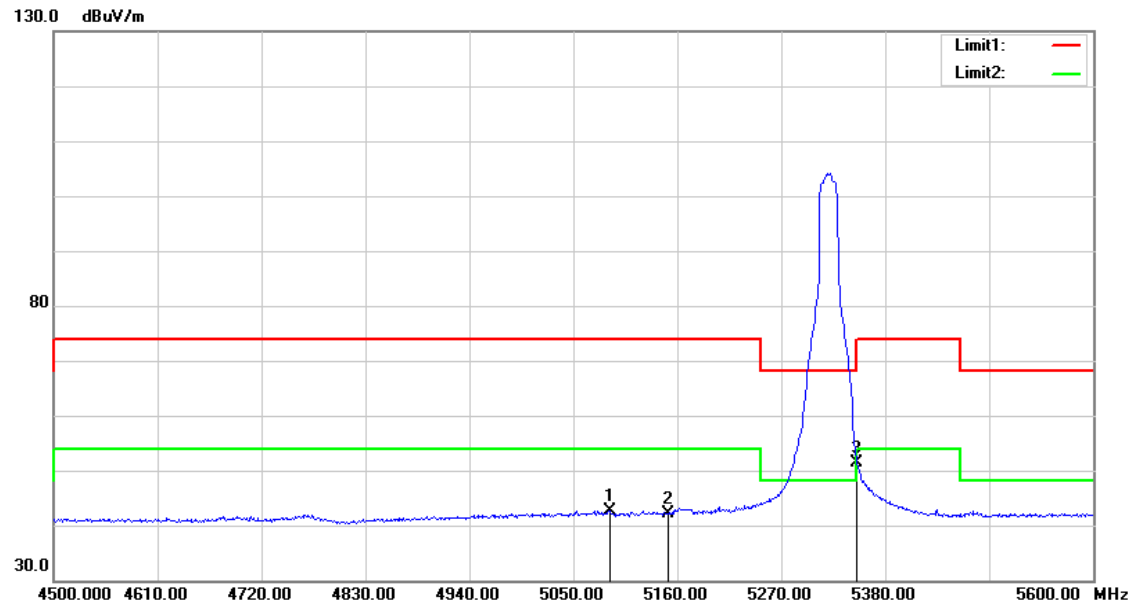


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	39.40	3.26	42.66	54.00	-11.34	AVG
2	5150.000	38.83	3.35	42.18	54.00	-11.82	AVG
3	5350.000	47.77	3.62	51.39	54.00	-2.61	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

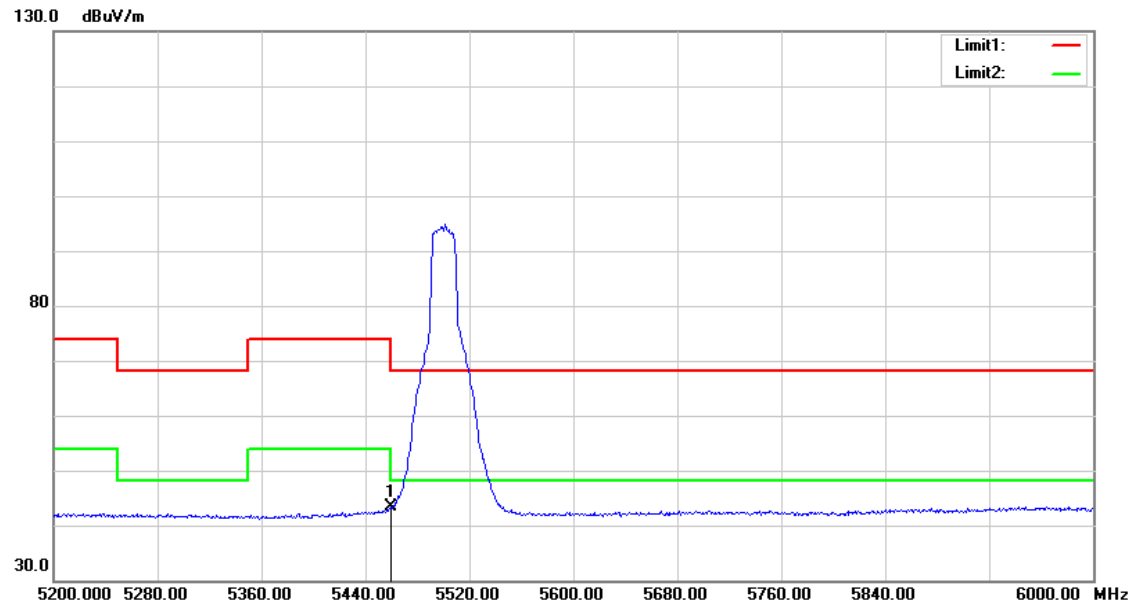


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	39.52	3.76	43.28	54.00	-10.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

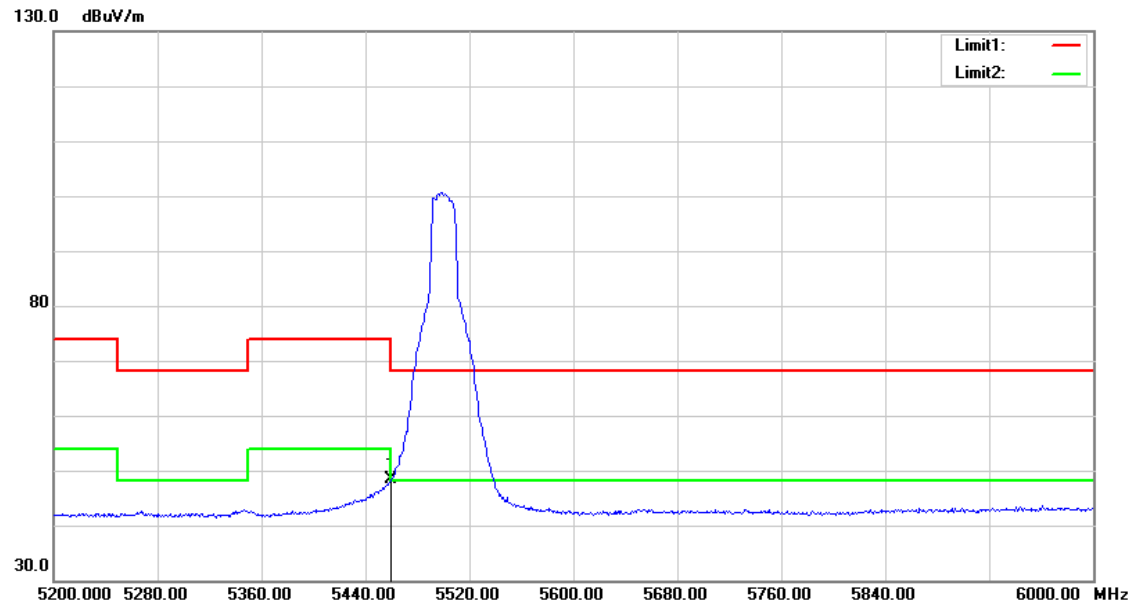


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	44.67	3.76	48.43	54.00	-5.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

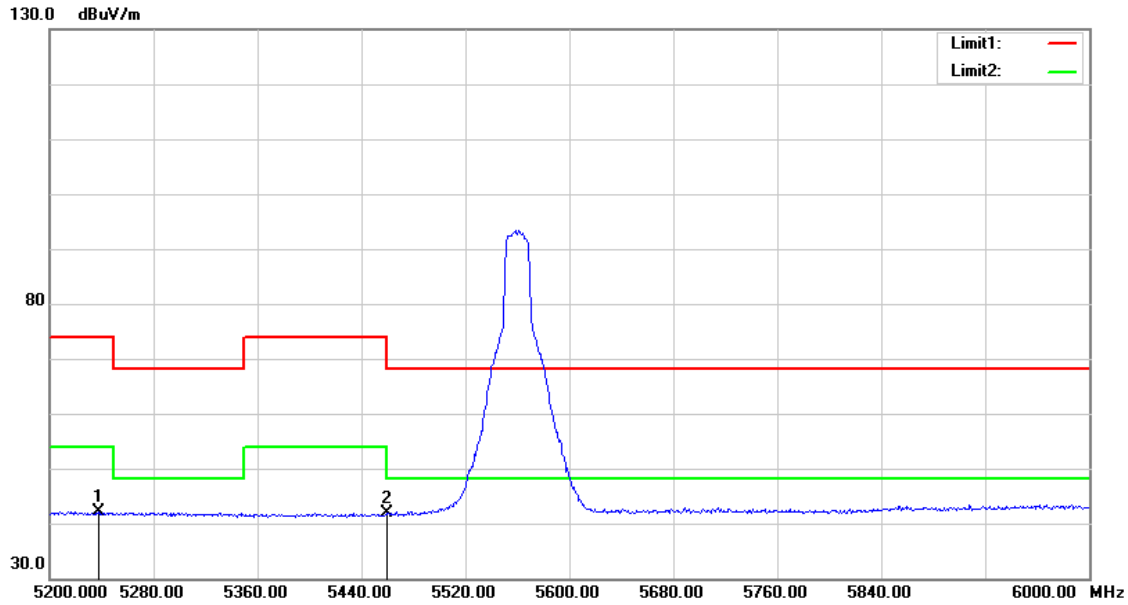


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5237.600	38.64	3.46	42.10	54.00	-11.90	AVG
2	5460.000	38.01	3.76	41.77	54.00	-12.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

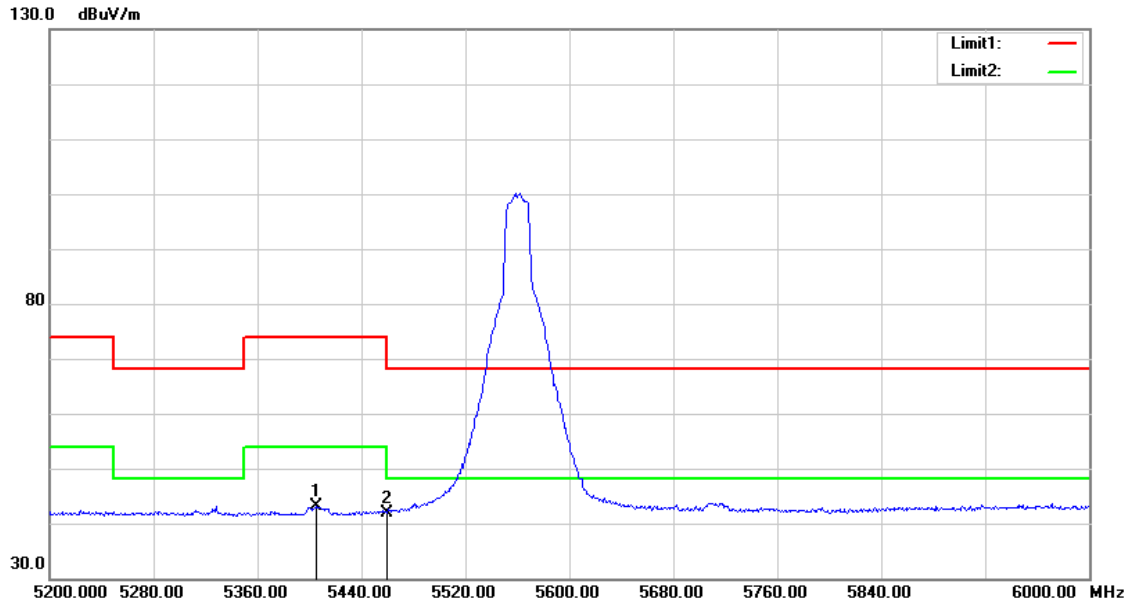


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5404.800	39.37	3.68	43.05	54.00	-10.95	AVG
2	5460.000	38.15	3.76	41.91	54.00	-12.09	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

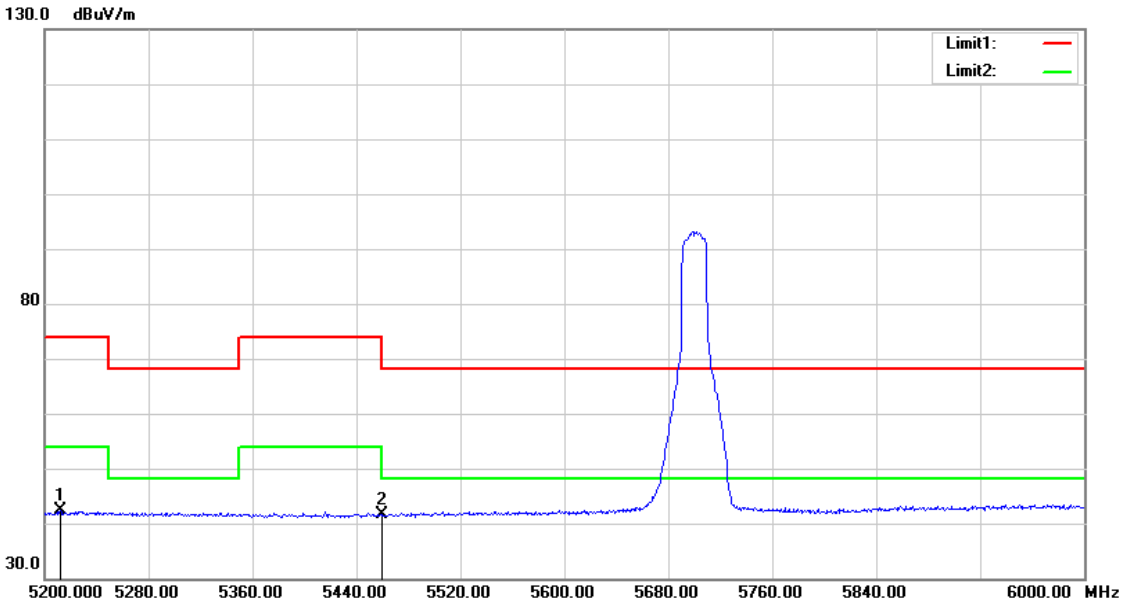


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	38.90	3.43	42.33	54.00	-11.67	AVG
2	5460.000	37.76	3.76	41.52	54.00	-12.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

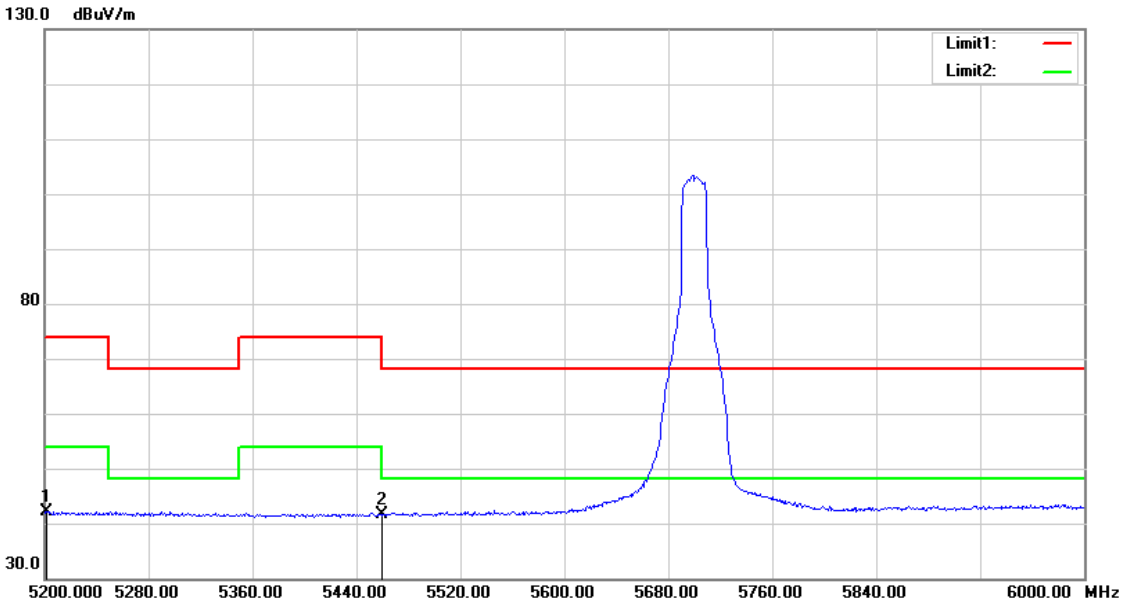


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5201.600	38.75	3.42	42.17	54.00	-11.83	AVG
2	5460.000	37.79	3.76	41.55	54.00	-12.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

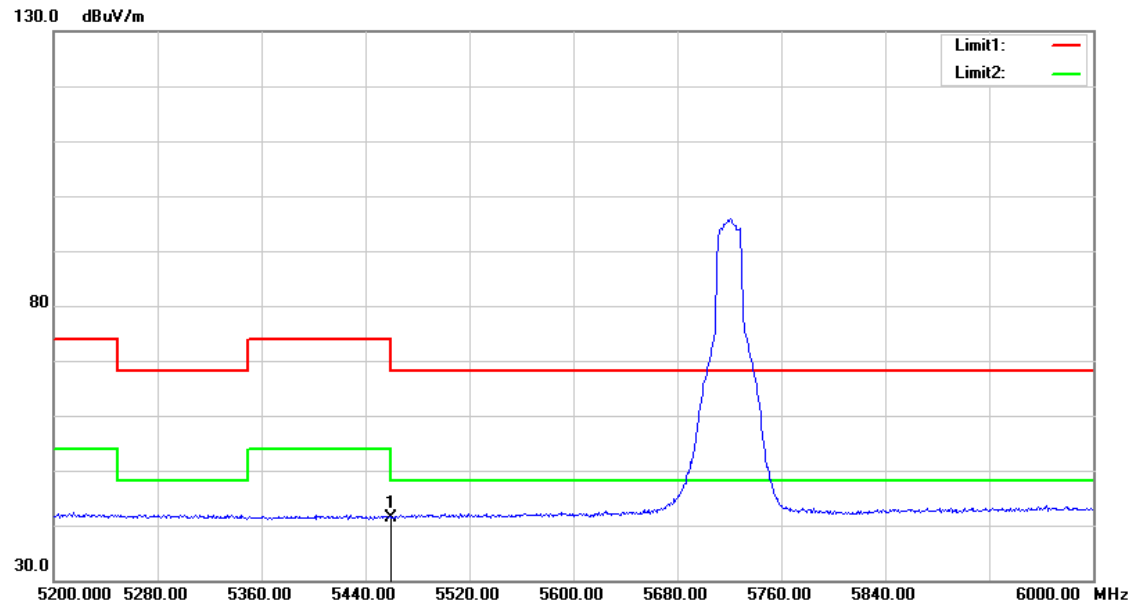


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	37.72	3.76	41.48	54.00	-12.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5720 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

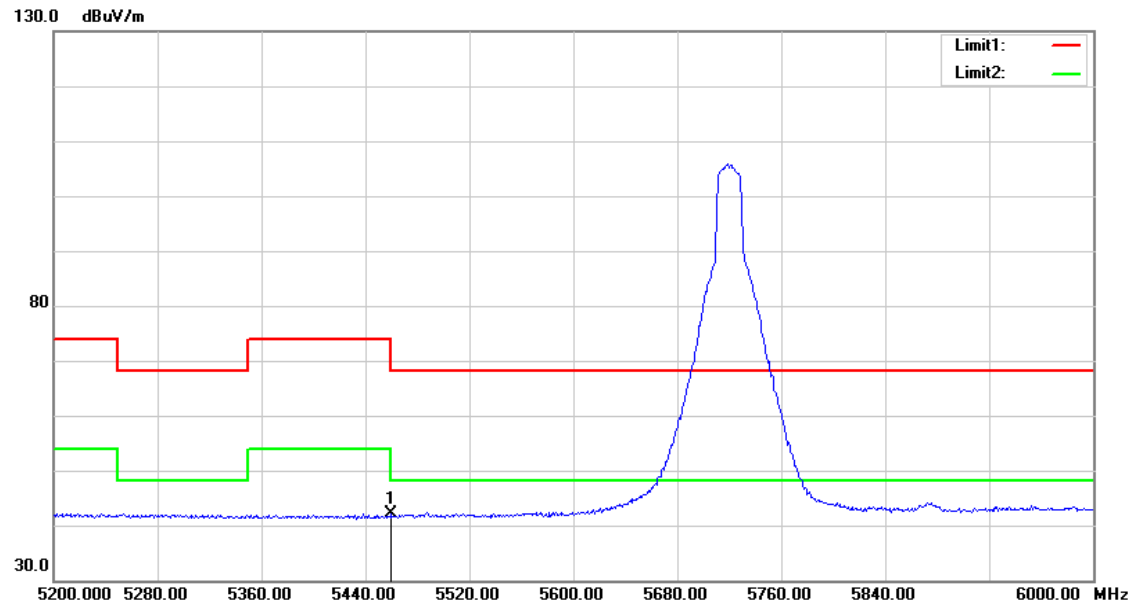


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.29	3.76	42.05	54.00	-11.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

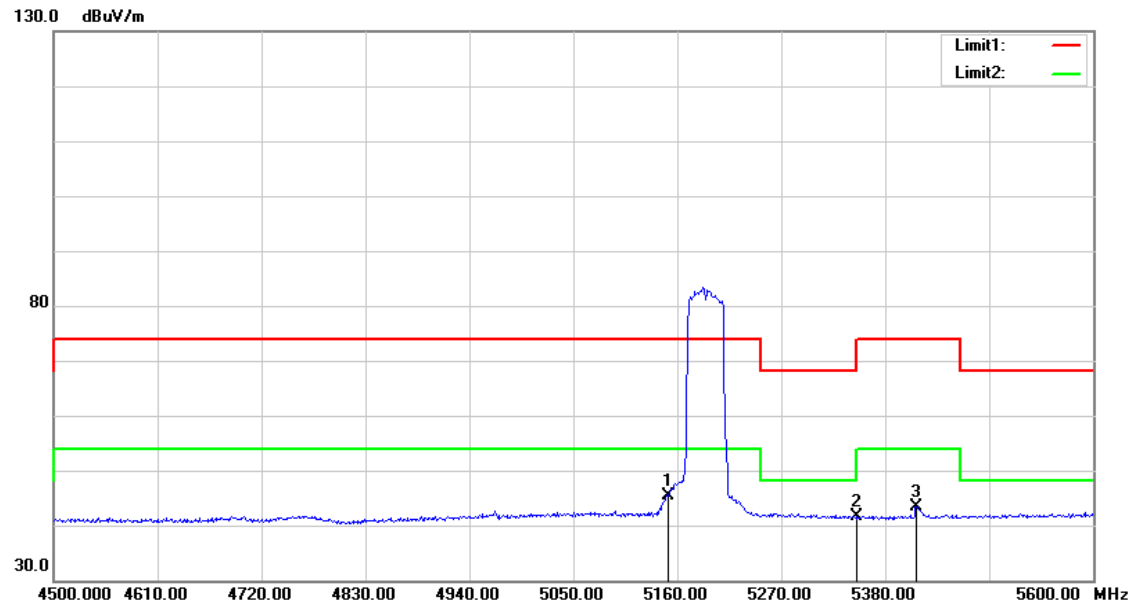


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	42.11	3.35	45.46	54.00	-8.54	AVG
2	5350.000	38.09	3.62	41.71	54.00	-12.29	AVG
3	5413.000	39.71	3.70	43.41	54.00	-10.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

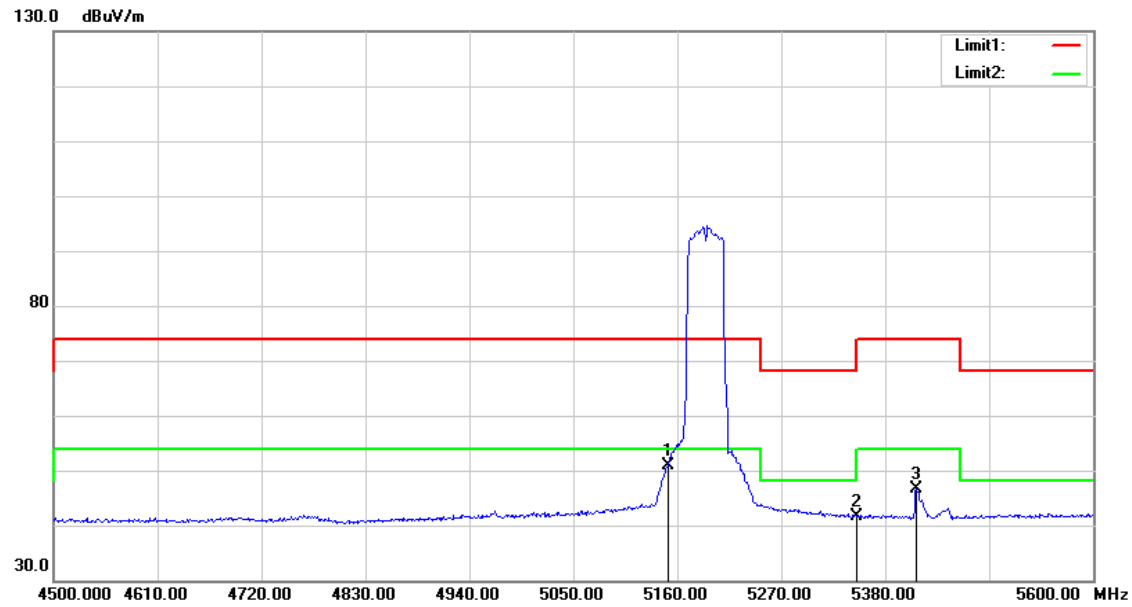


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	47.55	3.35	50.90	54.00	-3.10	AVG
2	5350.000	37.98	3.62	41.60	54.00	-12.40	AVG
3	5413.000	43.03	3.70	46.73	54.00	-7.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

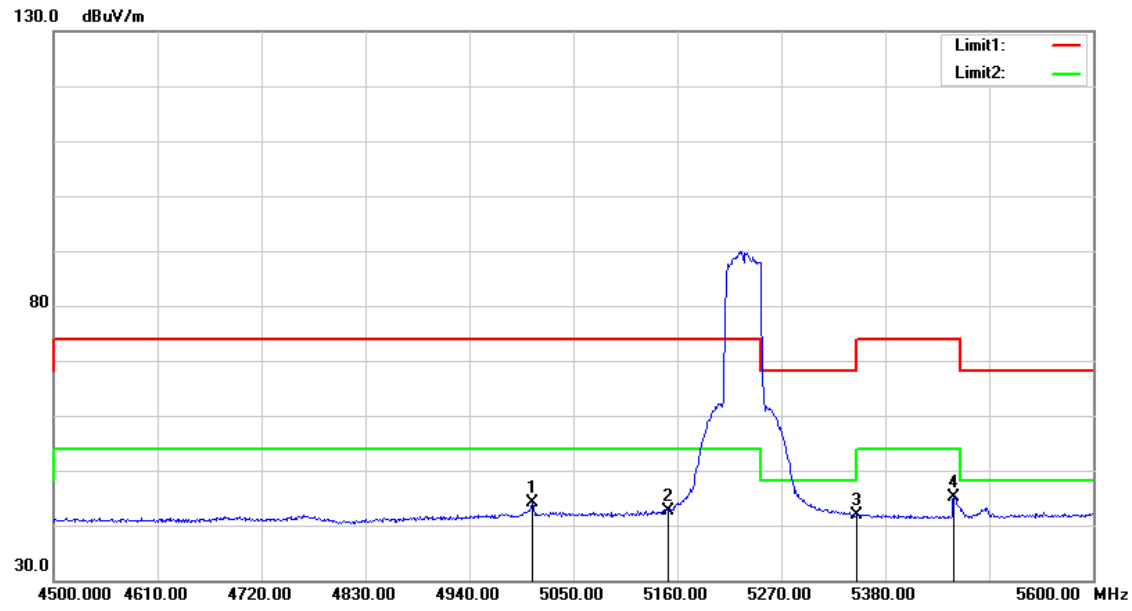


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5007.100	40.94	3.16	44.10	54.00	-9.90	AVG
2	5150.000	39.31	3.35	42.66	54.00	-11.34	AVG
3	5350.000	38.33	3.62	41.95	54.00	-12.05	AVG
4	5452.600	41.50	3.75	45.25	54.00	-8.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

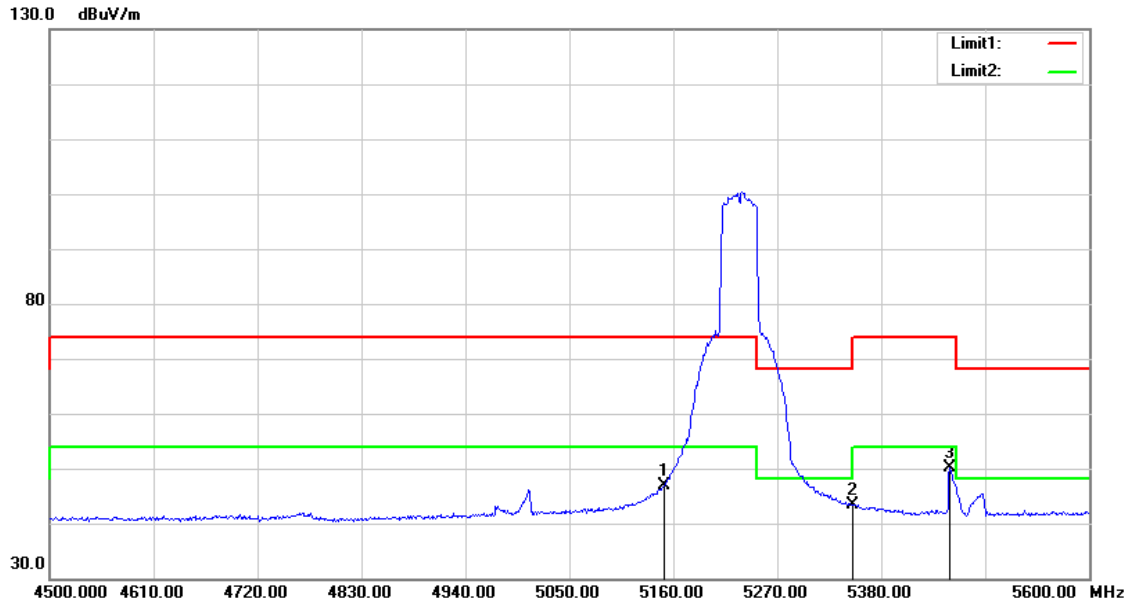


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	43.58	3.35	46.93	54.00	-7.07	AVG
2	5350.000	39.86	3.62	43.48	54.00	-10.52	AVG
3	5452.600	46.38	3.75	50.13	54.00	-3.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

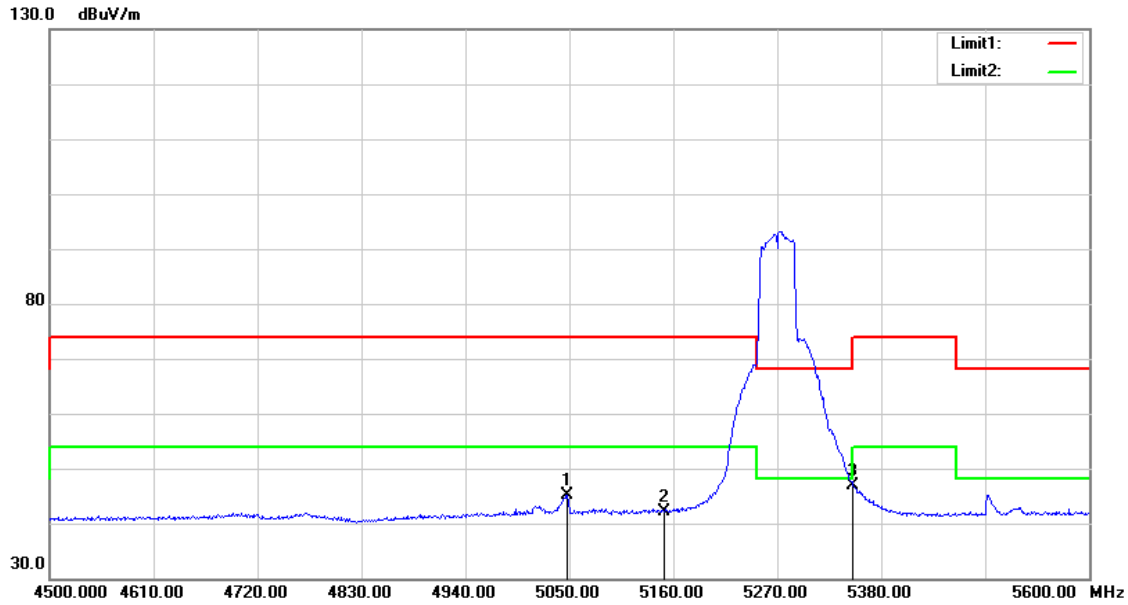


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5047.800	41.99	3.21	45.20	54.00	-8.80	AVG
2	5150.000	38.86	3.35	42.21	54.00	-11.79	AVG
3	5350.000	43.18	3.62	46.80	54.00	-7.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

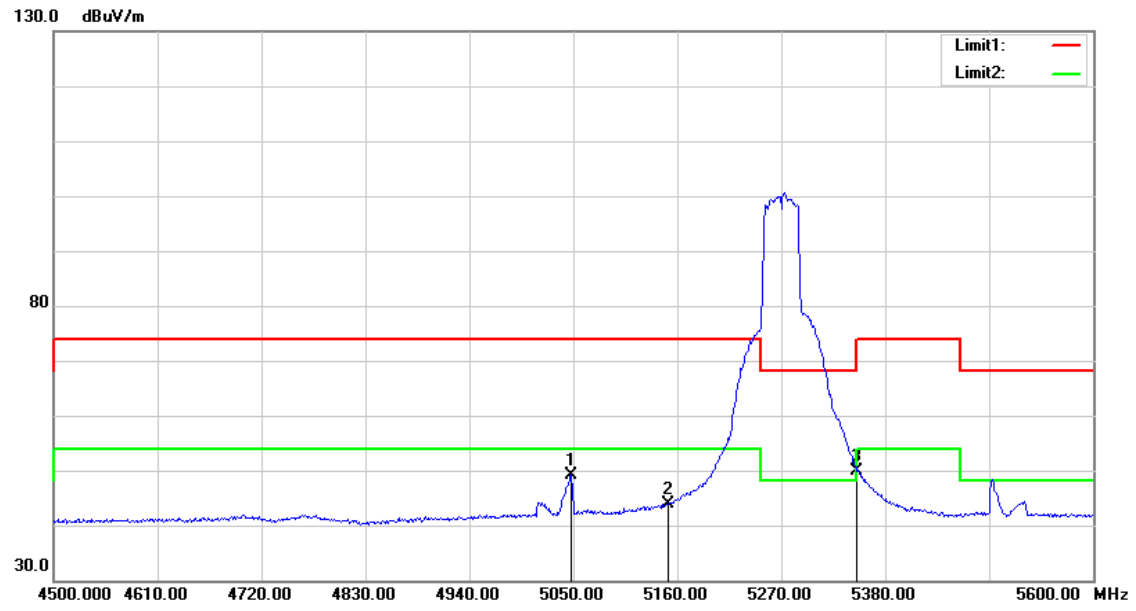


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5047.800	45.93	3.21	49.14	54.00	-4.86	AVG
2	5150.000	40.41	3.35	43.76	54.00	-10.24	AVG
3	5350.000	46.29	3.62	49.91	54.00	-4.09	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

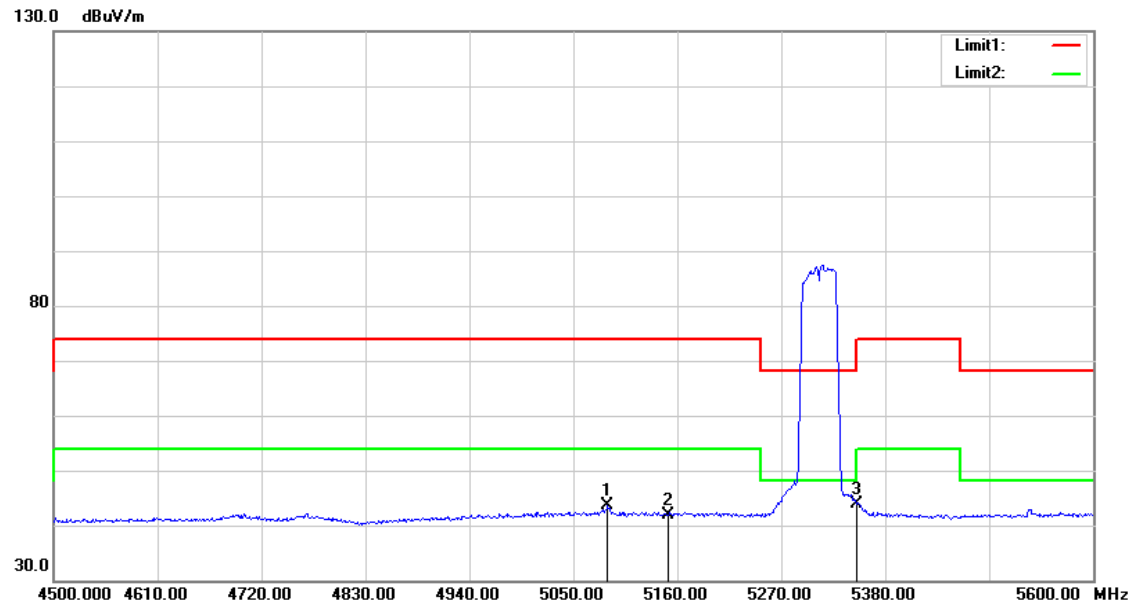


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.300	40.27	3.26	43.53	54.00	-10.47	AVG
2	5150.000	38.50	3.35	41.85	54.00	-12.15	AVG
3	5350.000	40.26	3.62	43.88	54.00	-10.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

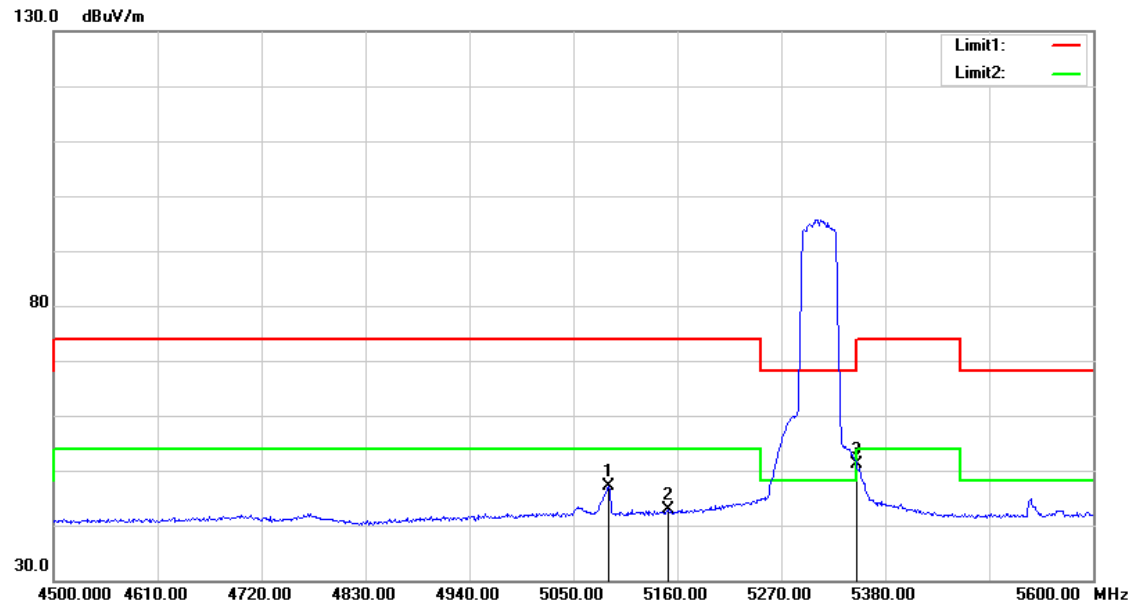


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.400	43.88	3.26	47.14	54.00	-6.86	AVG
2	5150.000	39.42	3.35	42.77	54.00	-11.23	AVG
3	5350.000	47.41	3.62	51.03	54.00	-2.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

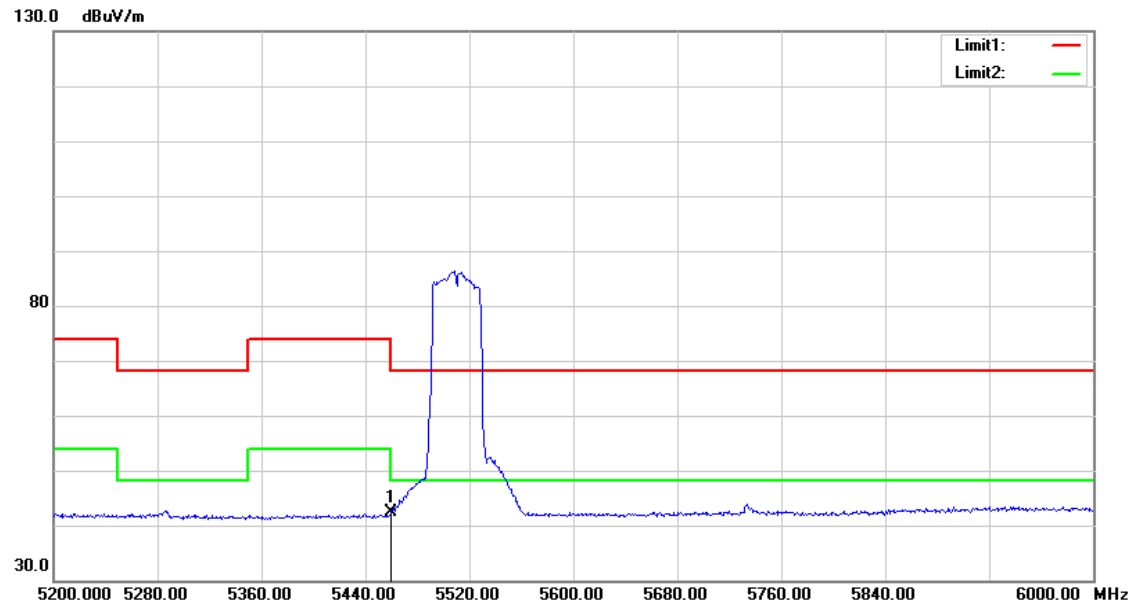


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.58	3.76	42.34	54.00	-11.66	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

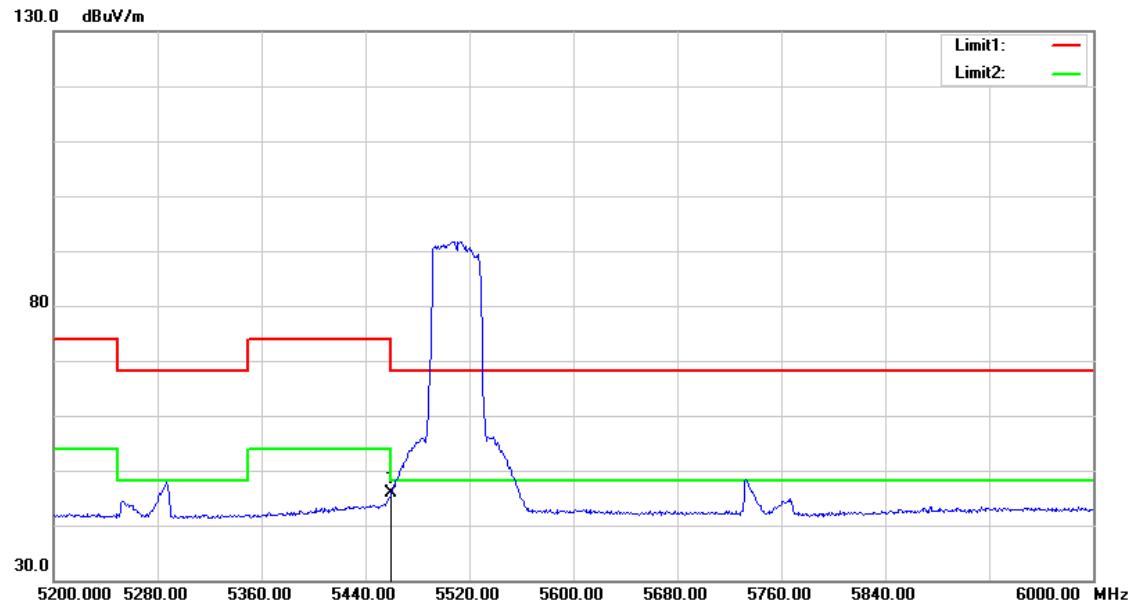


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	42.17	3.76	45.93	54.00	-8.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

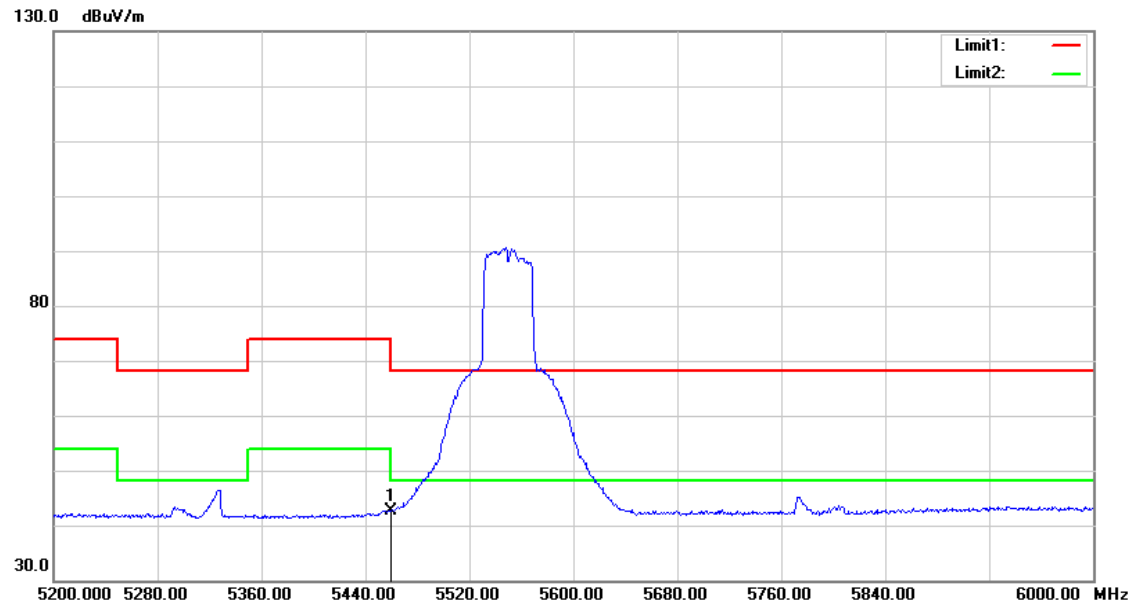


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.89	3.76	42.65	54.00	-11.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

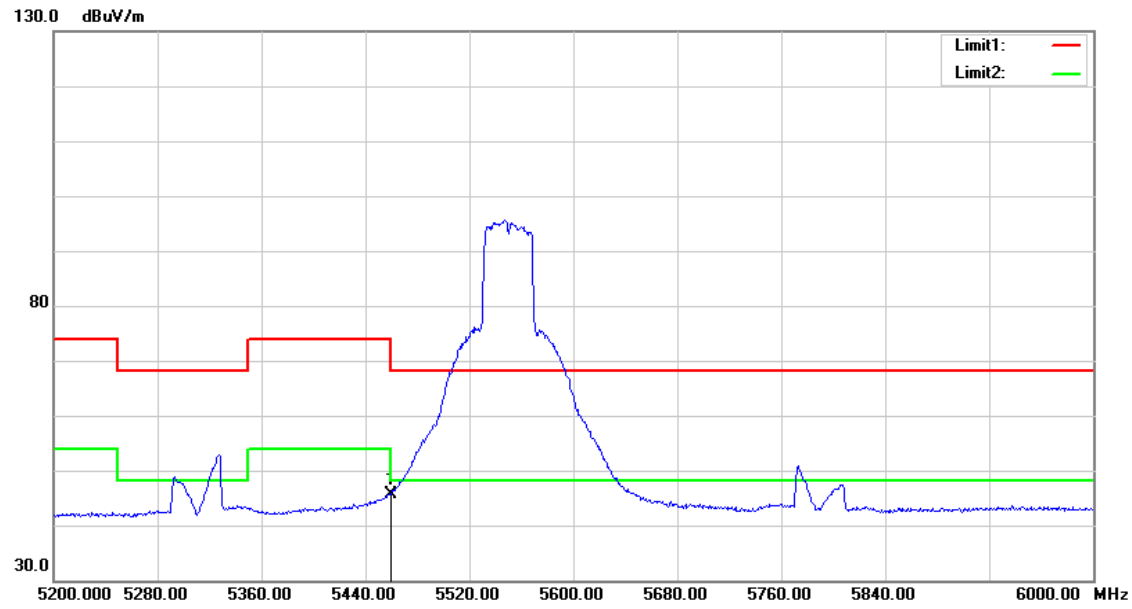


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	41.99	3.76	45.75	54.00	-8.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

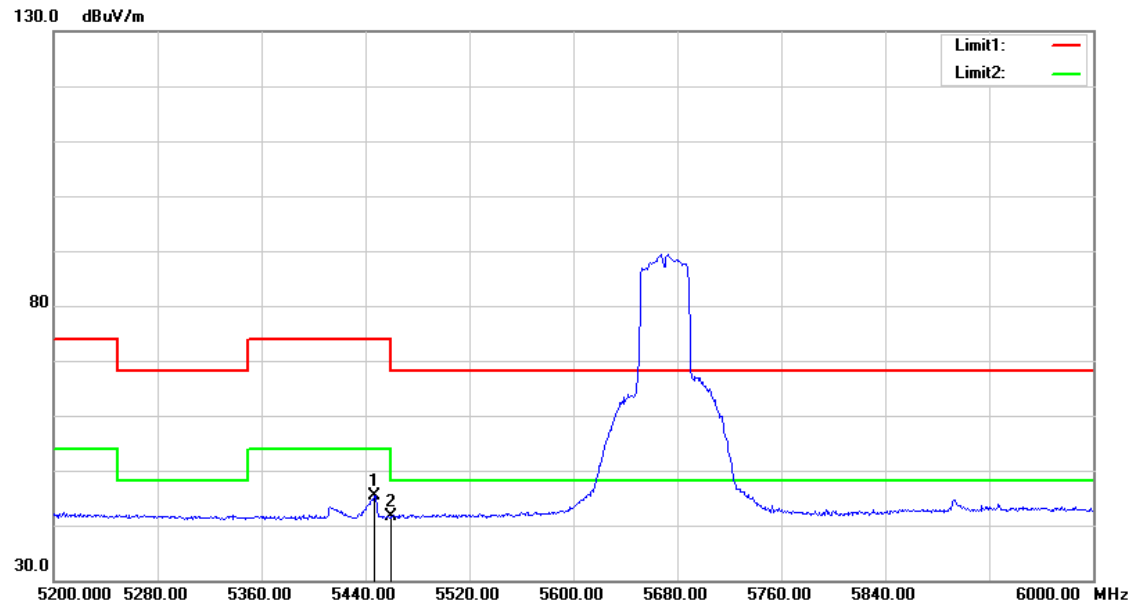


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	41.69	3.74	45.43	54.00	-8.57	AVG
2	5460.000	37.84	3.76	41.60	54.00	-12.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

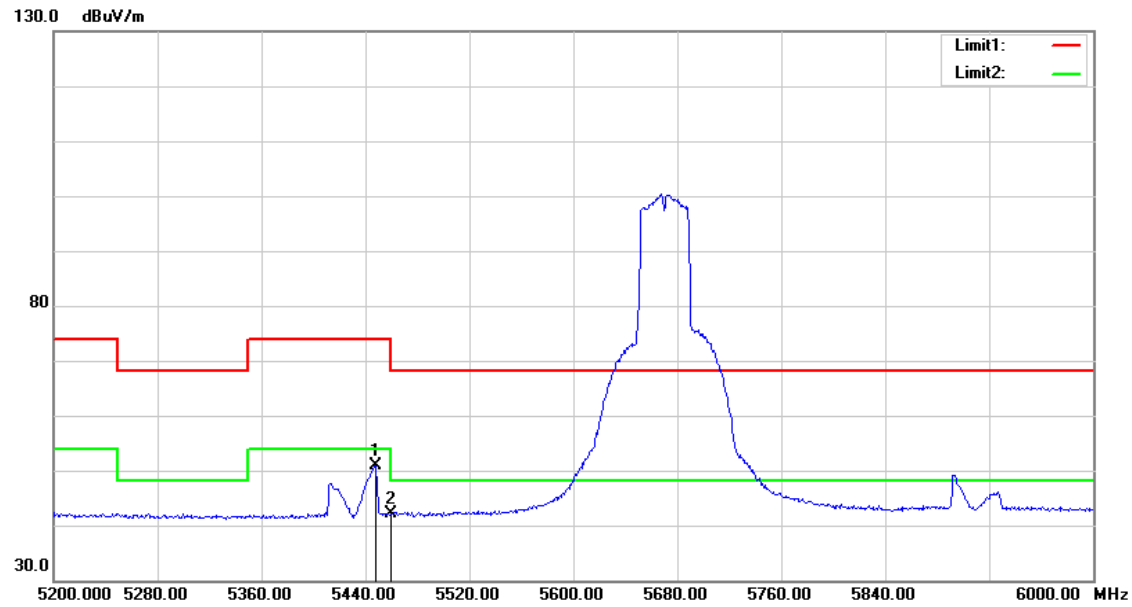


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.000	47.07	3.75	50.82	54.00	-3.18	AVG
2	5460.000	38.39	3.76	42.15	54.00	-11.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

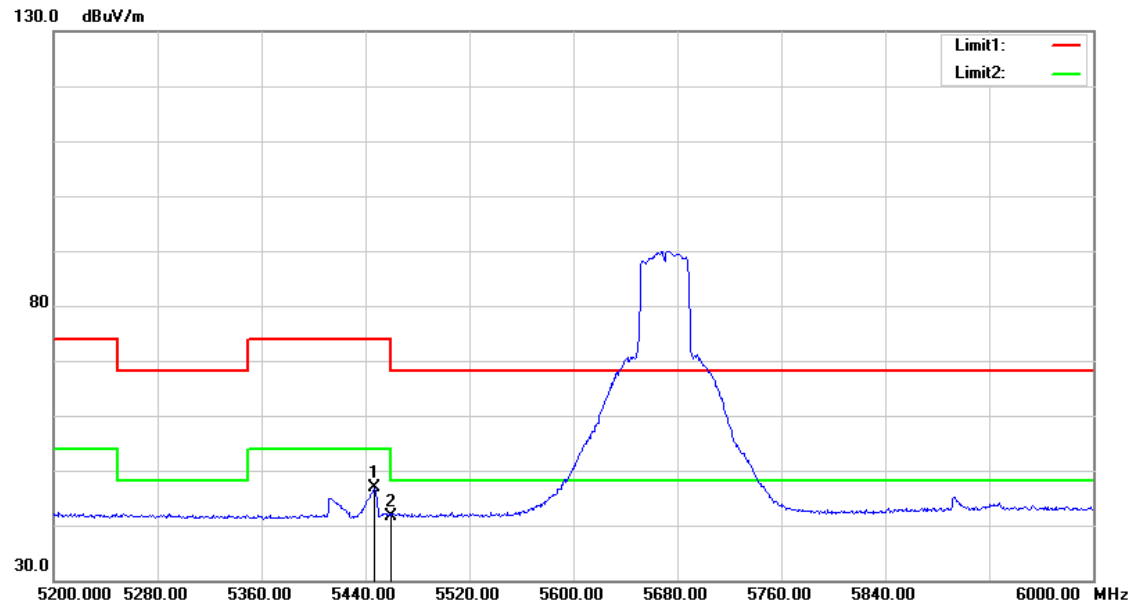


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	43.24	3.74	46.98	54.00	-7.02	AVG
2	5460.000	37.94	3.76	41.70	54.00	-12.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5710 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

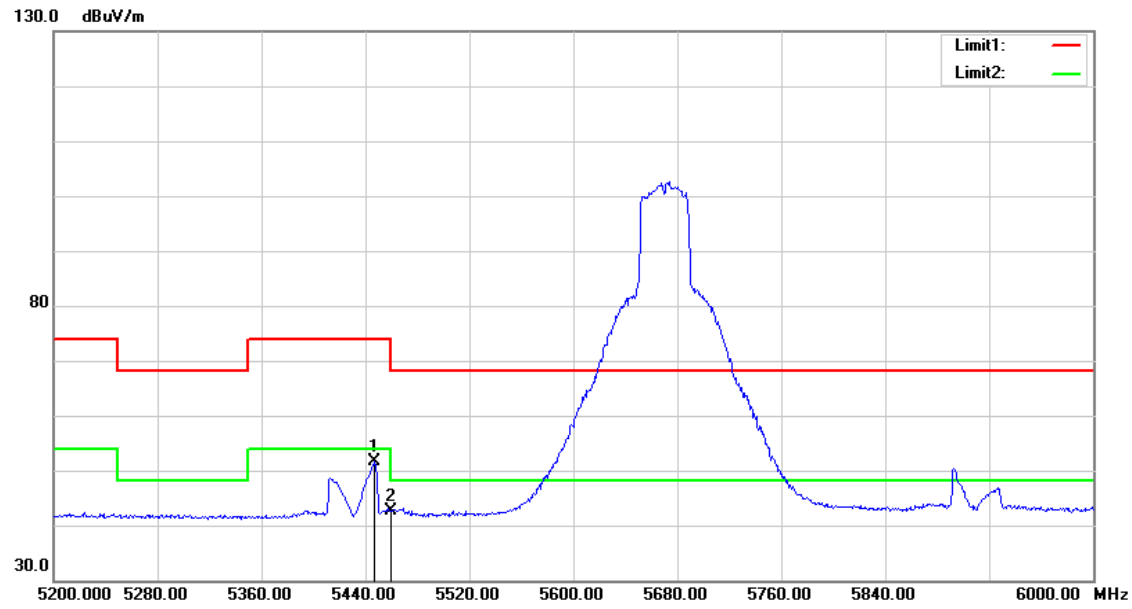


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	47.91	3.74	51.65	54.00	-2.35	AVG
2	5460.000	38.93	3.76	42.69	54.00	-11.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

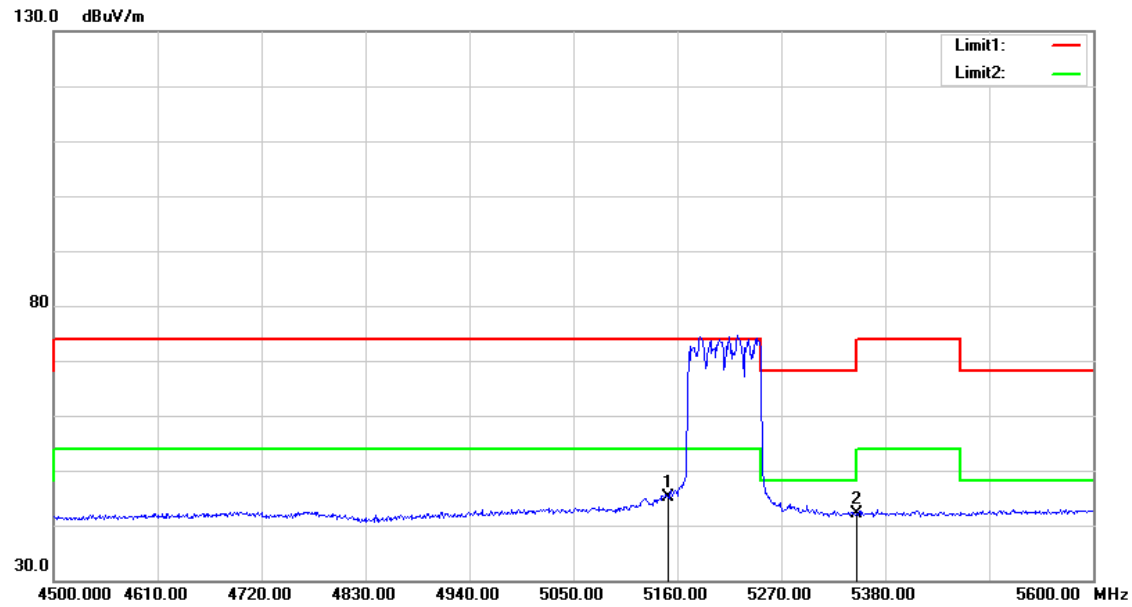


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	41.71	3.35	45.06	54.00	-8.94	AVG
2	5350.000	38.55	3.62	42.17	54.00	-11.83	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

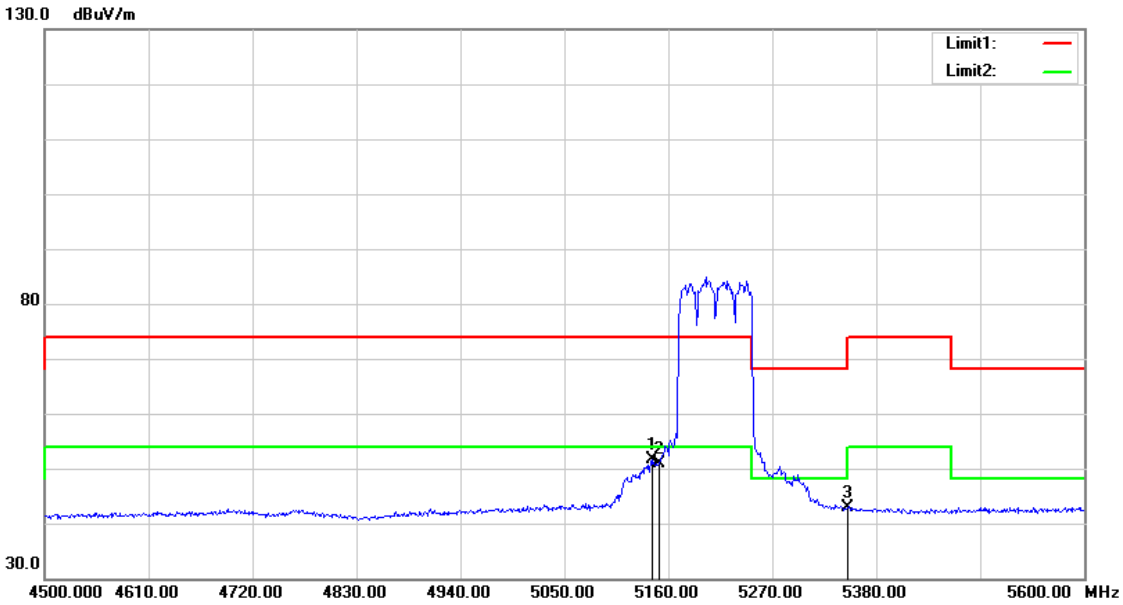


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.500	48.35	3.34	51.69	54.00	-2.31	AVG
2	5150.000	47.58	3.35	50.93	54.00	-3.07	AVG
3	5350.000	39.15	3.62	42.77	54.00	-11.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

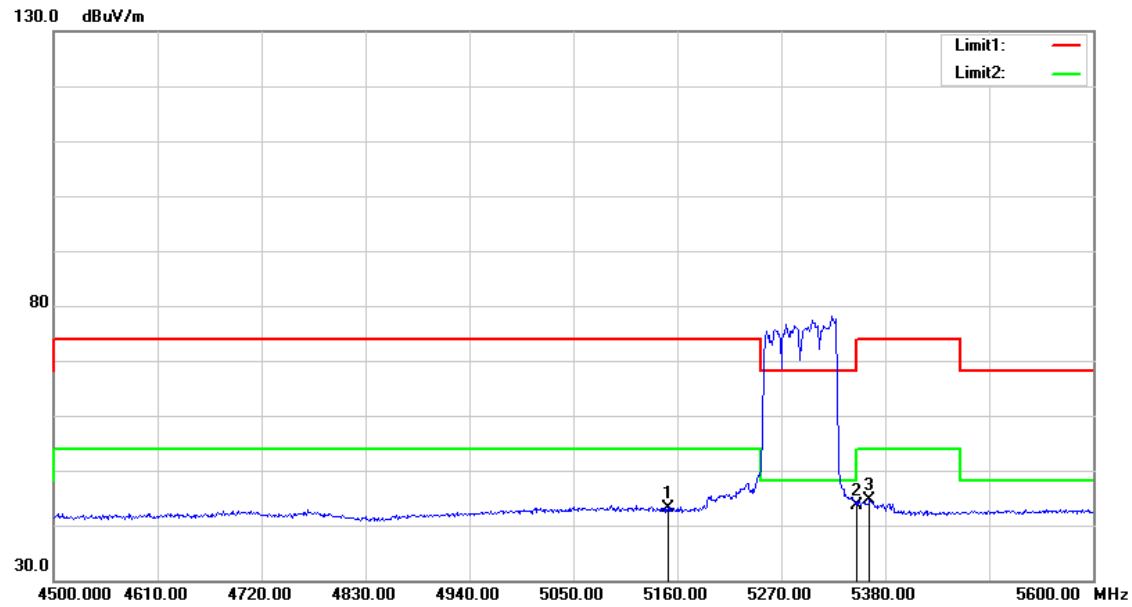


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.79	3.35	43.14	54.00	-10.86	AVG
2	5350.000	40.00	3.62	43.62	54.00	-10.38	AVG
3	5363.500	40.95	3.63	44.58	54.00	-9.42	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

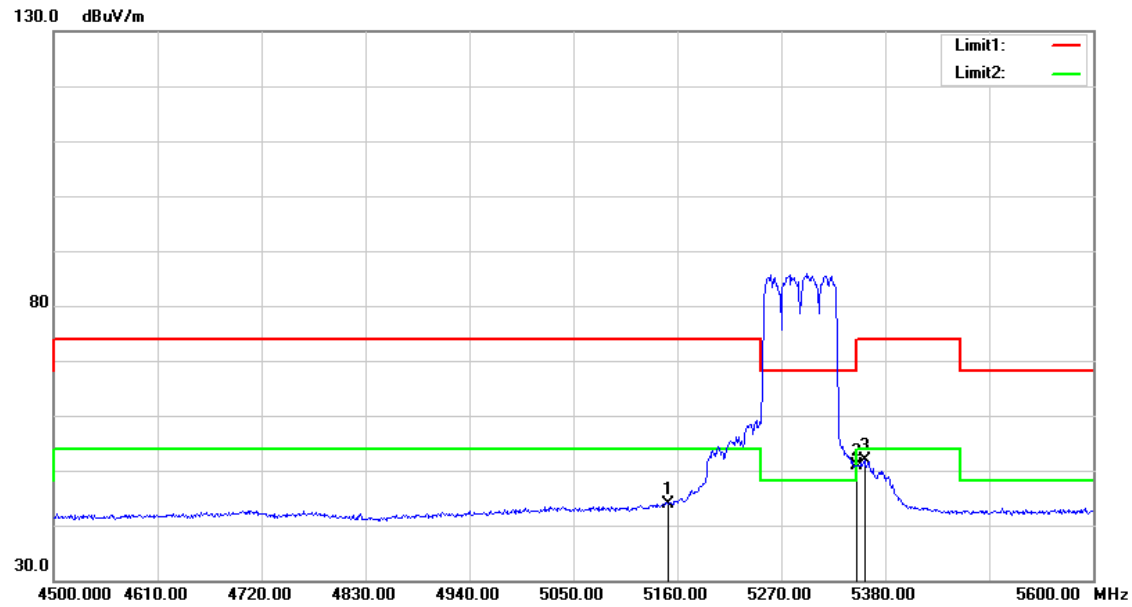


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	40.51	3.35	43.86	54.00	-10.14	AVG
2	5350.000	47.32	3.62	50.94	54.00	-3.06	AVG
3	5358.000	48.21	3.63	51.84	54.00	-2.16	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

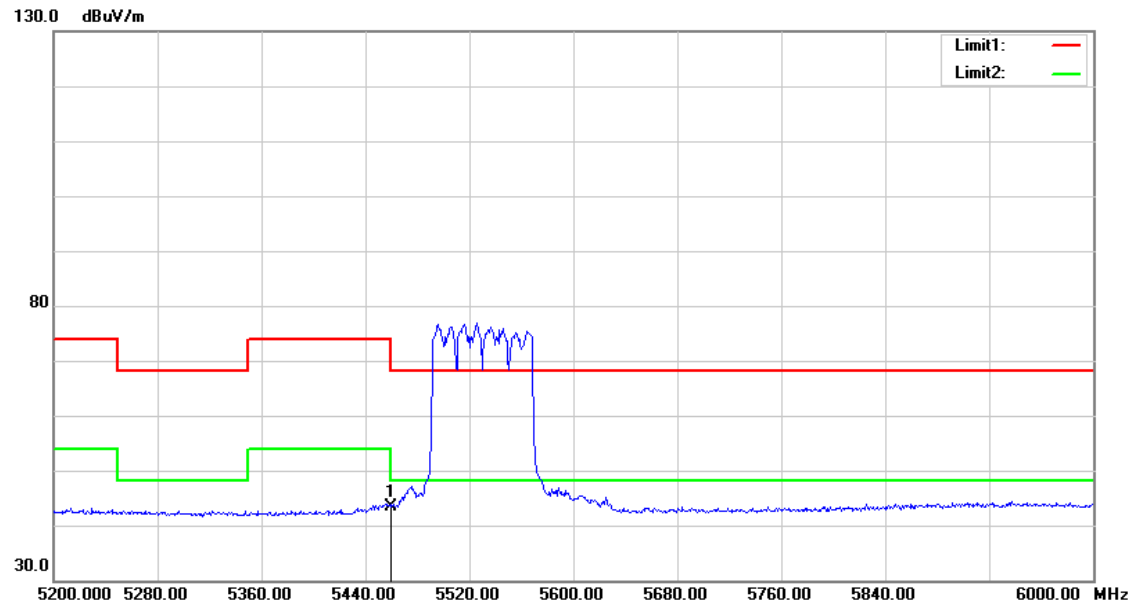


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	39.65	3.76	43.41	54.00	-10.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

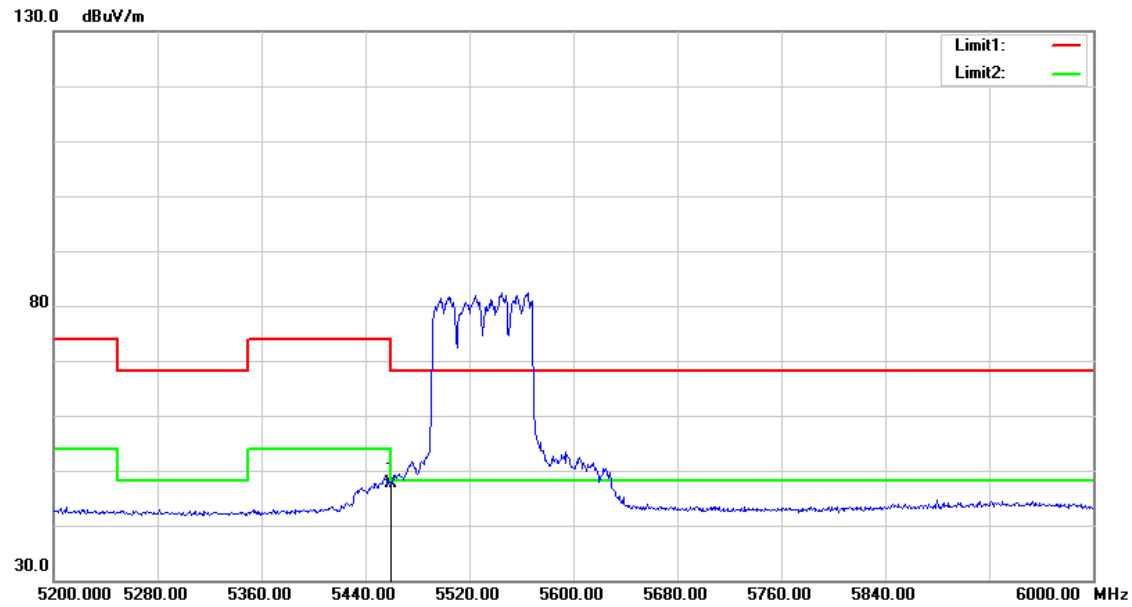


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	43.79	3.76	47.55	54.00	-6.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

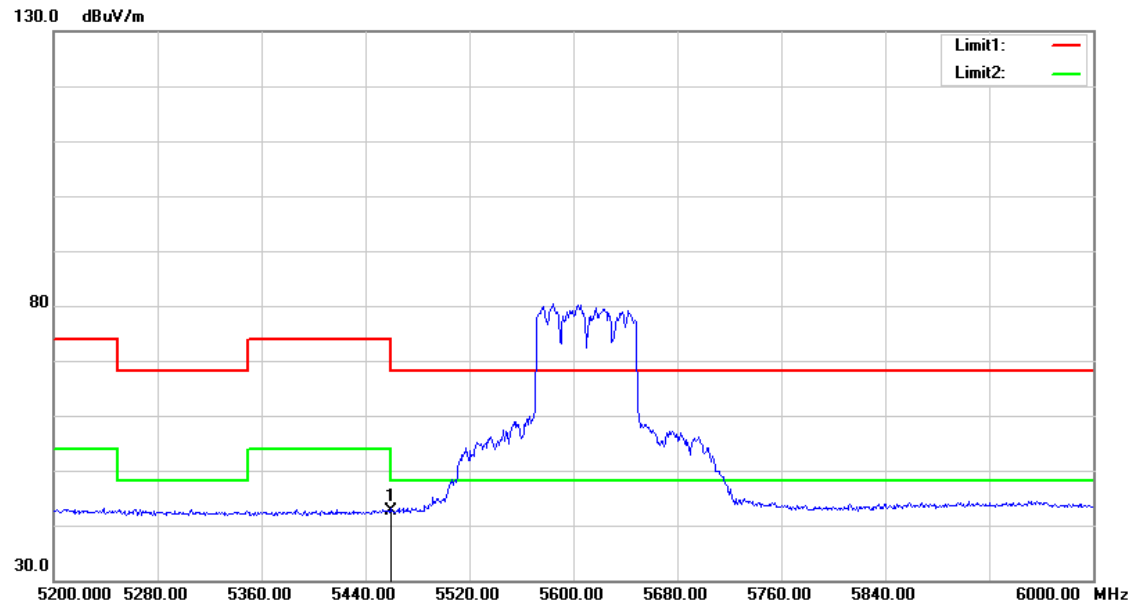


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.76	3.76	42.52	54.00	-11.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

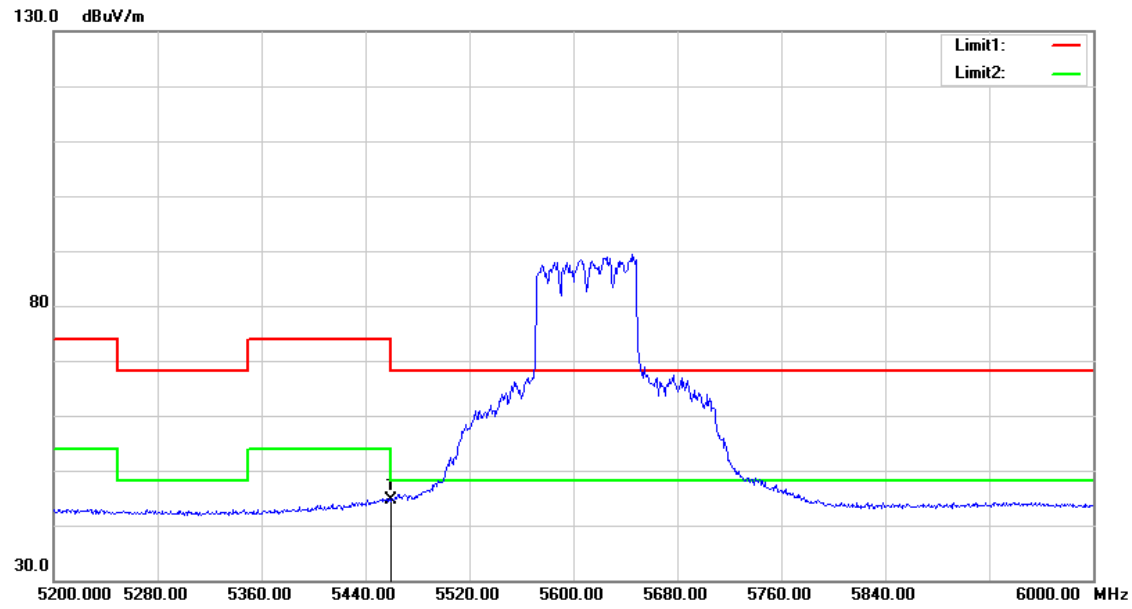


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	40.93	3.76	44.69	54.00	-9.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

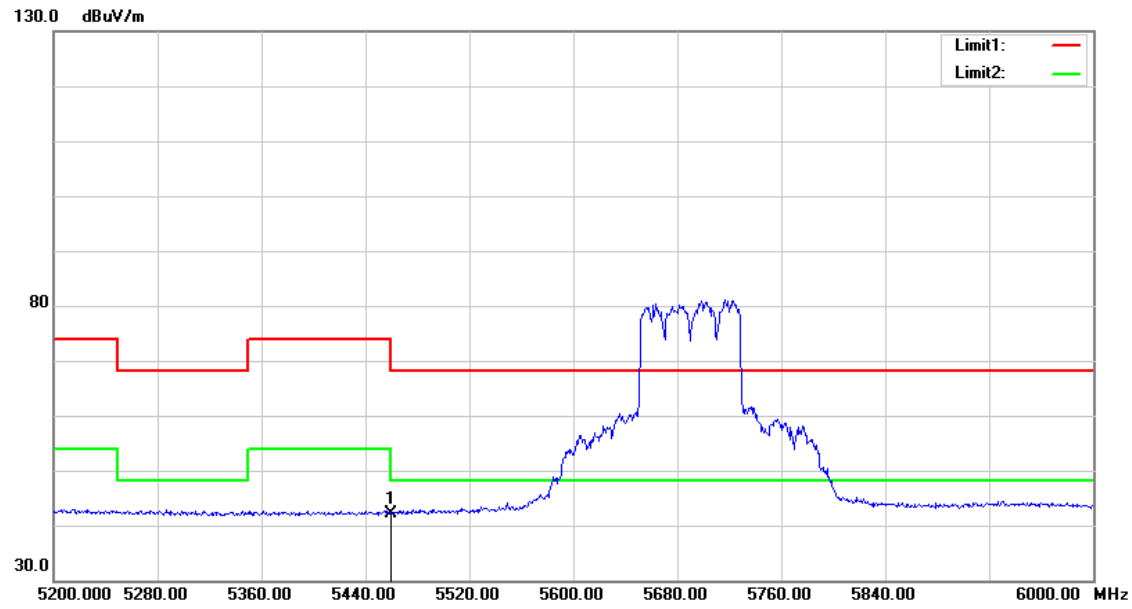


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.36	3.76	42.12	54.00	-11.88	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5690 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

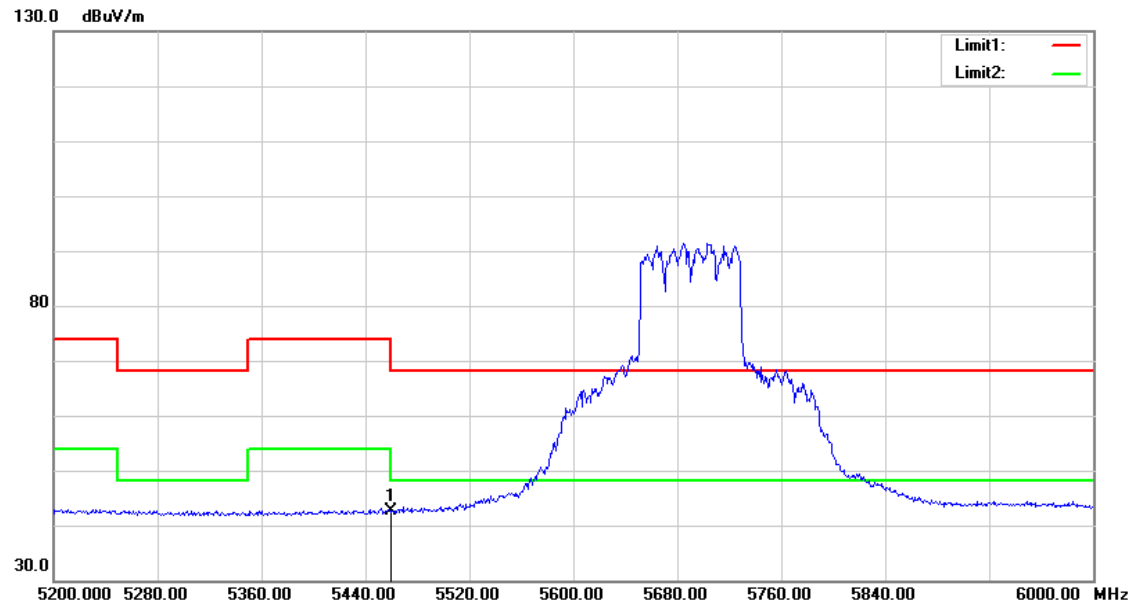

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	38.90	3.76	42.66	54.00	-11.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						Limit (dBm)
				ANT 1		ANT 2		ANT 1+2		
				dBm	W	dBm	W	dBm	W	
Mode 5	6	36	5180.0	10.00	0.010	15.19	0.033	16.34	0.043	≦ 24.00
		40	5200.0	12.32	0.017	13.60	0.023	16.02	0.040	≦ 24.00
		44	5220.0	12.28	0.017	13.51	0.022	15.95	0.039	≦ 24.00
		48	5240.0	12.91	0.020	14.93	0.031	17.05	0.051	≦ 24.00
		52	5260.0	12.94	0.020	15.07	0.032	17.14	0.052	≦ 24.00
		56	5280.0	11.90	0.015	16.66	0.046	17.91	0.062	≦ 24.00
		60	5300.0	11.86	0.015	16.60	0.046	17.86	0.061	≦ 24.00
		64	5320.0	11.91	0.016	16.41	0.044	17.73	0.059	≦ 24.00
		100	5500.0	12.42	0.017	17.20	0.052	18.45	0.070	≦ 24.00
		104	5520.0	12.16	0.016	17.30	0.054	18.46	0.070	≦ 24.00
		108	5540.0	12.38	0.017	17.34	0.054	18.54	0.071	≦ 24.00
		112	5560.0	12.61	0.018	17.38	0.055	18.63	0.073	≦ 24.00
		116	5580.0	12.55	0.018	17.33	0.054	18.58	0.072	≦ 24.00
		120	5600.0	12.52	0.018	17.28	0.053	18.53	0.071	≦ 24.00
		124	5620.0	12.48	0.018	17.24	0.053	18.49	0.071	≦ 24.00
		128	5640.0	12.46	0.018	17.17	0.052	18.43	0.070	≦ 24.00
		132	5660.0	12.42	0.017	17.13	0.052	18.39	0.069	≦ 24.00
		136	5680.0	12.28	0.017	17.11	0.051	18.34	0.068	≦ 24.00
		140	5700.0	11.46	0.014	16.24	0.042	17.49	0.056	≦ 24.00
		144	5720.0	11.65	0.015	16.60	0.046	17.80	0.060	≦ 24.00
		144	5720.0	4.63	0.003	9.73	0.009	10.90	0.012	≦ 30.00
		149	5745.0	12.54	0.018	15.46	0.035	17.25	0.053	≦ 30.00
		153	5765.0	12.66	0.018	15.45	0.035	17.29	0.054	≦ 30.00
		157	5785.0	12.71	0.019	15.51	0.036	17.34	0.054	≦ 30.00
		161	5805.0	12.63	0.018	15.49	0.035	17.30	0.054	≦ 30.00
		165	5825.0	10.12	0.010	15.60	0.036	16.68	0.047	≦ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						Limit (dBm)
				ANT 1		ANT 2		ANT 1+2		
				dBm	W	dBm	W	dBm	W	
Mode 6	13	36	5180.0	9.72	0.009	15.07	0.032	16.18	0.041	≦ 21.45
		40	5200.0	12.05	0.016	17.35	0.054	18.47	0.070	≦ 21.45
		44	5220.0	11.94	0.016	17.27	0.053	18.39	0.069	≦ 21.45
		48	5240.0	11.89	0.015	17.15	0.052	18.28	0.067	≦ 21.45
		52	5260.0	11.98	0.016	17.06	0.051	18.23	0.067	≦ 21.45
		56	5280.0	11.43	0.014	16.33	0.043	17.55	0.057	≦ 21.45
		60	5300.0	11.38	0.014	16.04	0.040	17.32	0.054	≦ 21.45
		64	5320.0	10.96	0.012	15.80	0.038	17.03	0.050	≦ 21.45
		100	5500.0	11.62	0.015	16.47	0.044	17.70	0.059	≦ 21.31
		104	5520.0	11.50	0.014	16.28	0.042	17.53	0.057	≦ 21.31
		108	5540.0	11.69	0.015	16.20	0.042	17.52	0.056	≦ 21.31
		112	5560.0	11.72	0.015	16.31	0.043	17.61	0.058	≦ 21.31
		116	5580.0	11.65	0.015	16.26	0.042	17.55	0.057	≦ 21.31
		120	5600.0	11.63	0.015	16.22	0.042	17.52	0.056	≦ 21.31
		124	5620.0	11.48	0.014	16.20	0.042	17.46	0.056	≦ 21.31
		128	5640.0	11.49	0.014	16.10	0.041	17.39	0.055	≦ 21.31
		132	5660.0	11.44	0.014	16.18	0.041	17.44	0.055	≦ 21.31
		136	5680.0	11.42	0.014	16.13	0.041	17.39	0.055	≦ 21.31
		140	5700.0	9.70	0.009	15.25	0.033	16.32	0.043	≦ 21.31
		144	5720.0	11.62	0.015	16.57	0.045	17.78	0.060	≦ 21.31
		144	5720.0	5.00	0.003	10.24	0.011	11.38	0.014	≦ 27.45
		149	5745.0	12.58	0.018	15.15	0.033	17.06	0.051	≦ 27.45
		153	5765.0	12.65	0.018	15.21	0.033	17.13	0.052	≦ 27.45
		157	5785.0	12.70	0.019	15.28	0.034	17.19	0.052	≦ 27.45
		161	5805.0	12.65	0.018	15.25	0.033	17.15	0.052	≦ 27.45
		165	5825.0	12.28	0.017	14.75	0.030	16.70	0.047	≦ 27.45

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						Limit (dBm)
				ANT 1		ANT 2		ANT 1+2		
				dBm	W	dBm	W	dBm	W	
Mode 7	27	38	5190.0	5.38	0.003	9.85	0.010	11.18	0.013	≦ 21.45
		46	5230.0	9.98	0.010	15.08	0.032	16.25	0.042	≦ 21.45
		54	5270.0	12.12	0.016	15.96	0.039	17.46	0.056	≦ 21.45
		62	5310.0	5.83	0.004	10.02	0.010	11.42	0.014	≦ 21.45
		102	5510.0	7.82	0.006	12.65	0.018	13.88	0.024	≦ 21.45
		110	5550.0	12.07	0.016	16.95	0.050	18.17	0.066	≦ 21.45
		118	5590.0	12.18	0.017	16.79	0.048	18.08	0.064	≦ 21.45
		126	5630.0	12.06	0.016	16.72	0.047	18.00	0.063	≦ 21.45
		134	5670.0	10.79	0.012	15.43	0.035	16.71	0.047	≦ 21.45
		142	5710.0	13.73	0.024	16.16	0.041	18.12	0.065	≦ 21.45
		142	5710.0	2.28	0.002	4.76	0.003	6.70	0.005	≦ 27.45
		151	5755.0	12.22	0.017	14.90	0.031	16.77	0.048	≦ 27.45
		159	5795.0	12.48	0.018	14.98	0.031	16.92	0.049	≦ 27.45
Mode 8	13	36	5180.0	9.91	0.010	15.34	0.034	16.43	0.044	≦ 21.45
		40	5200.0	12.11	0.016	17.55	0.057	18.64	0.073	≦ 21.45
		44	5220.0	12.09	0.016	17.38	0.055	18.51	0.071	≦ 21.45
		48	5240.0	12.08	0.016	17.28	0.053	18.43	0.070	≦ 21.45
		52	5260.0	12.13	0.016	17.24	0.053	18.41	0.069	≦ 21.45
		56	5280.0	11.90	0.015	16.50	0.045	17.79	0.060	≦ 21.45
		60	5300.0	11.52	0.014	16.55	0.045	17.74	0.059	≦ 21.45
		64	5320.0	11.13	0.013	15.88	0.039	17.13	0.052	≦ 21.45
		100	5500.0	11.66	0.015	16.58	0.045	17.79	0.060	≦ 21.45
		104	5520.0	11.68	0.015	16.31	0.043	17.60	0.058	≦ 21.45
		108	5540.0	11.73	0.015	16.38	0.043	17.66	0.058	≦ 21.45
		112	5560.0	11.75	0.015	16.44	0.044	17.71	0.059	≦ 21.45
		116	5580.0	11.72	0.015	16.39	0.044	17.66	0.058	≦ 21.45
		120	5600.0	11.69	0.015	16.35	0.043	17.63	0.058	≦ 21.45
		124	5620.0	11.66	0.015	16.32	0.043	17.60	0.058	≦ 21.45
		128	5640.0	11.62	0.015	16.29	0.043	17.56	0.057	≦ 21.45
		132	5660.0	11.59	0.014	16.26	0.042	17.53	0.057	≦ 21.45
		136	5680.0	11.56	0.014	16.22	0.042	17.50	0.056	≦ 21.45
		140	5700.0	9.82	0.010	15.31	0.034	16.39	0.044	≦ 21.45
		144	5720.0	11.58	0.014	16.63	0.046	17.81	0.060	≦ 21.45
		144	5720.0	5.07	0.003	10.24	0.011	11.40	0.014	≦ 27.45
		149	5745.0	12.70	0.019	15.34	0.034	17.23	0.053	≦ 27.45
		153	5765.0	12.76	0.019	15.30	0.034	17.22	0.053	≦ 27.45
		157	5785.0	12.80	0.019	15.40	0.035	17.30	0.054	≦ 27.45
		161	5805.0	12.72	0.019	15.35	0.034	17.24	0.053	≦ 27.45
		165	5825.0	12.41	0.017	14.86	0.031	16.82	0.048	≦ 27.45

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT 1		ANT 2		ANT 1+2		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 9	27	38	5190.0	5.52	0.004	9.97	0.010	11.30	0.013	≦ 21.45
		46	5230.0	10.07	0.010	15.11	0.032	16.29	0.043	≦ 21.45
		54	5270.0	12.22	0.017	16.14	0.041	17.62	0.058	≦ 21.45
		62	5310.0	5.91	0.004	10.13	0.010	11.52	0.014	≦ 21.45
		102	5510.0	7.96	0.006	12.79	0.019	14.02	0.025	≦ 21.45
		110	5550.0	12.26	0.017	17.00	0.050	18.26	0.067	≦ 21.45
		118	5590.0	12.22	0.017	16.85	0.048	18.14	0.065	≦ 21.45
		126	5630.0	12.19	0.017	16.78	0.048	18.08	0.064	≦ 21.45
		134	5670.0	10.94	0.012	15.61	0.036	16.88	0.049	≦ 21.45
		142	5710.0	14.02	0.025	16.29	0.043	18.32	0.068	≦ 21.45
		142	5710.0	2.39	0.002	5.02	0.003	6.91	0.005	≦ 27.45
		151	5755.0	12.34	0.017	15.11	0.032	16.95	0.050	≦ 27.45
		159	5795.0	12.66	0.018	15.22	0.033	17.14	0.052	≦ 27.45
Mode 10	58.6	42	5210.0	2.05	0.002	7.72	0.006	8.76	0.008	≦ 21.45
		58	5290.0	4.89	0.003	9.91	0.010	11.10	0.013	≦ 21.45
		106	5530.0	6.11	0.004	10.92	0.012	12.16	0.016	≦ 21.45
		122	5610.0	11.56	0.014	16.02	0.040	17.35	0.054	≦ 21.45
		138	5690.0	11.29	0.013	16.07	0.040	17.32	0.054	≦ 21.45
		138	5690.0	-4.85	0.000	0.58	0.001	1.67	0.001	≦ 27.45
		155	5775.0	8.70	0.007	14.66	0.029	15.64	0.037	≦ 27.45

Maximum Power Spectral Density

ANT 1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 5	36	5180.0	-0.390	0.021	-0.369	8.45
	40	5200.0	1.521	0.021	1.542	8.45
	48	5240.0	2.096	0.021	2.117	8.45
	52	5260.0	2.021	0.021	2.042	8.45
	56	5280.0	0.903	0.021	0.924	8.45
	64	5320.0	0.762	0.021	0.783	8.45
	100	5500.0	1.422	0.021	1.443	8.45
	112	5560.0	2.076	0.021	2.097	8.45
	140	5700.0	1.432	0.021	1.453	8.45
	144	5720.0	2.030	0.021	2.051	8.45
Mode 8	36	5180.0	-0.705	0.045	-0.660	8.45
	40	5200.0	1.302	0.045	1.347	8.45
	48	5240.0	1.017	0.045	1.062	8.45
	52	5260.0	1.033	0.045	1.078	8.45
	56	5280.0	0.651	0.045	0.696	8.45
	64	5320.0	-0.138	0.045	-0.093	8.45
	100	5500.0	0.622	0.045	0.667	8.45
	112	5560.0	1.171	0.045	1.216	8.45
	140	5700.0	-0.318	0.045	-0.273	8.45
	144	5720.0	1.606	0.045	1.651	8.45
Mode 9	38	5190.0	-8.406	0.229	-8.177	8.45
	46	5230.0	-3.029	0.229	-2.800	8.45
	54	5270.0	-0.938	0.229	-0.709	8.45
	62	5310.0	-7.682	0.229	-7.453	8.45
	102	5510.0	-5.239	0.229	-5.010	8.45
	110	5550.0	-0.460	0.229	-0.231	8.45
	134	5670.0	-1.365	0.229	-1.136	8.45
	142	5710.0	0.355	0.229	0.584	8.45
Mode 10	42	5210.0	-14.225	0.273	-13.952	8.45
	58	5290.0	-12.130	0.273	-11.857	8.45
	106	5530.0	-10.247	0.273	-9.974	8.45
	122	5610.0	-4.222	0.273	-3.949	8.45
	138	5690.0	-5.308	0.273	-5.035	8.45

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT 1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 5	144	5720.0	-8.618	0.021	-1.607	27.45
	149	5745.0	-6.165	0.021	0.846	27.45
	157	5785.0	-6.891	0.021	0.120	27.45
	165	5825.0	-6.667	0.021	0.344	27.45
Mode 8	144	5720.0	-8.718	0.045	-1.683	27.45
	149	5745.0	-7.014	0.045	0.021	27.45
	157	5785.0	-7.509	0.045	-0.474	27.45
	165	5825.0	-7.904	0.045	-0.869	27.45
Mode 9	142	5710.0	-11.120	0.229	-3.901	27.45
	151	5755.0	-10.280	0.229	-3.061	27.45
	159	5795.0	-10.408	0.229	-3.189	27.45
Mode 10	138	5690.0	-17.652	0.273	-10.389	27.45
	155	5775.0	-16.511	0.273	-9.248	27.45

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT 2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 5	36	5180.0	4.571	0.021	4.592	8.45
	40	5200.0	3.458	0.021	3.479	8.45
	48	5240.0	3.870	0.021	3.891	8.45
	52	5260.0	4.192	0.021	4.213	8.45
	56	5280.0	5.315	0.021	5.336	8.45
	64	5320.0	5.182	0.021	5.203	8.45
	100	5500.0	6.281	0.021	6.302	8.45
	112	5560.0	6.638	0.021	6.659	8.45
	140	5700.0	6.095	0.021	6.116	8.45
	144	5720.0	6.928	0.021	6.949	8.45
Mode 8	36	5180.0	4.352	0.045	4.397	8.45
	40	5200.0	6.256	0.045	6.301	8.45
	48	5240.0	6.107	0.045	6.152	8.45
	52	5260.0	5.965	0.045	6.010	8.45
	56	5280.0	4.822	0.045	4.867	8.45
	64	5320.0	4.358	0.045	4.403	8.45
	100	5500.0	5.291	0.045	5.336	8.45
	112	5560.0	5.951	0.045	5.996	8.45
	140	5700.0	4.664	0.045	4.709	8.45
	144	5720.0	6.641	0.045	6.686	8.45
Mode 9	38	5190.0	-3.813	0.229	-3.584	8.45
	46	5230.0	2.147	0.229	2.376	8.45
	54	5270.0	3.515	0.229	3.744	8.45
	62	5310.0	-3.781	0.229	-3.552	8.45
	102	5510.0	-0.493	0.229	-0.264	8.45
	110	5550.0	4.036	0.229	4.265	8.45
	134	5670.0	3.206	0.229	3.435	8.45
	142	5710.0	2.591	0.229	2.820	8.45
Mode 10	42	5210.0	-8.707	0.273	-8.434	8.45
	58	5290.0	-7.164	0.273	-6.891	8.45
	106	5530.0	-5.506	0.273	-5.233	8.45
	122	5610.0	-0.064	0.273	0.209	8.45
	138	5690.0	-0.904	0.273	-0.631	8.45

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT 2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 5	144	5720.0	-3.432	0.021	3.579	27.45
	149	5745.0	-3.976	0.021	3.035	27.45
	157	5785.0	-4.277	0.021	2.734	27.45
	165	5825.0	-2.400	0.021	4.611	27.45
Mode 8	144	5720.0	-4.155	0.045	2.880	27.45
	149	5745.0	-4.152	0.045	2.883	27.45
	157	5785.0	-4.517	0.045	2.518	27.45
	165	5825.0	-4.982	0.045	2.053	27.45
Mode 9	142	5710.0	-8.326	0.229	-1.107	27.45
	151	5755.0	-7.389	0.229	-0.170	27.45
	159	5795.0	-7.642	0.229	-0.423	27.45
Mode 10	138	5690.0	-12.275	0.273	-5.012	27.45
	155	5775.0	-10.109	0.273	-2.846	27.45

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)


ANT 1+2				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/MHz)	限制值 (dBm/MHz)
Mode 5	36	5180.0	5.795	8.45
	40	5200.0	5.628	8.45
	48	5240.0	6.104	8.45
	52	5260.0	6.272	8.45
	56	5280.0	6.678	8.45
	64	5320.0	6.543	8.45
	100	5500.0	7.530	8.45
	112	5560.0	7.962	8.45
	140	5700.0	7.393	8.45
	144	5720.0	8.167	8.45
Mode 8	36	5180.0	5.577	8.45
	40	5200.0	7.506	8.45
	48	5240.0	7.324	8.45
	52	5260.0	7.220	8.45
	56	5280.0	6.275	8.45
	64	5320.0	5.723	8.45
	100	5500.0	6.612	8.45
	112	5560.0	7.244	8.45
	140	5700.0	5.907	8.45
	144	5720.0	7.871	8.45
Mode 9	38	5190.0	-2.289	8.45
	46	5230.0	3.528	8.45
	54	5270.0	5.075	8.45
	62	5310.0	-2.068	8.45
	102	5510.0	0.992	8.45
	110	5550.0	5.585	8.45
	134	5670.0	4.736	8.45
	142	5710.0	4.855	8.45
Mode 10	42	5210.0	-7.359	8.45
	58	5290.0	-5.689	8.45
	106	5530.0	-3.976	8.45
	122	5610.0	1.620	8.45
	138	5690.0	0.713	8.45

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.


ANT 1+2				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 5	144	5720.0	4.728	27.45
	149	5745.0	5.087	27.45
	157	5785.0	4.631	27.45
	165	5825.0	5.992	27.45
Mode 8	144	5720.0	4.182	27.45
	149	5745.0	4.694	27.45
	157	5785.0	4.285	27.45
	165	5825.0	3.844	27.45
Mode 9	142	5710.0	0.727	27.45
	151	5755.0	1.631	27.45
	159	5795.0	1.421	27.45
Mode 10	138	5690.0	-3.906	27.45
	155	5775.0	-1.951	27.45



Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)


Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH36	
CH40	
CH48	

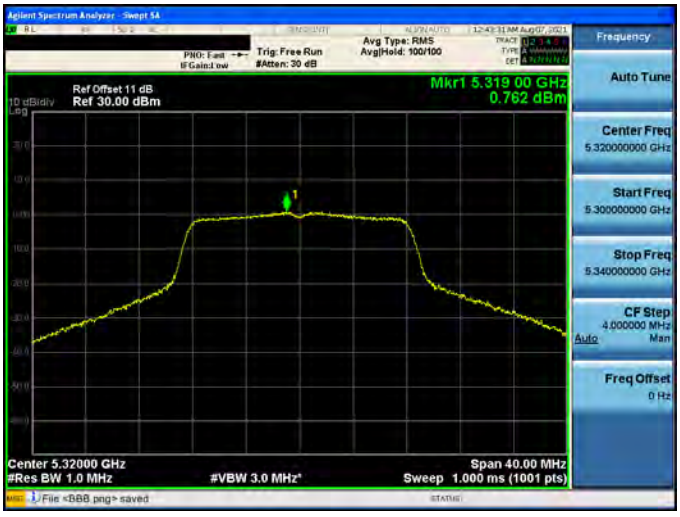Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH52	
CH56	
CH64	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH100	
CH112	
CH140	

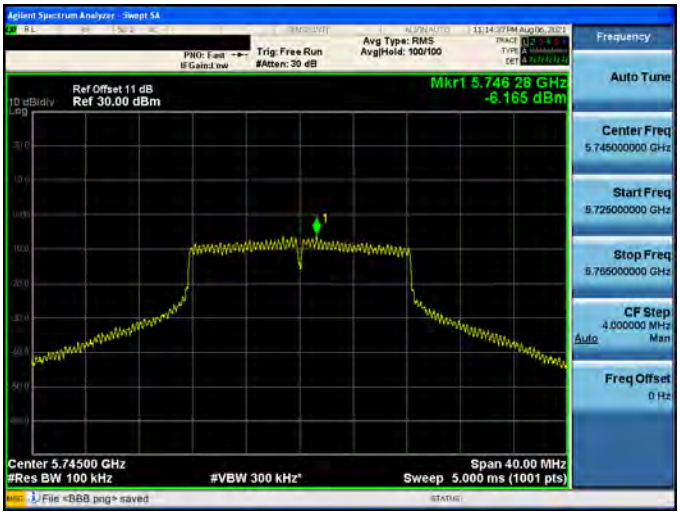
Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH144	
CH144	
CH149	

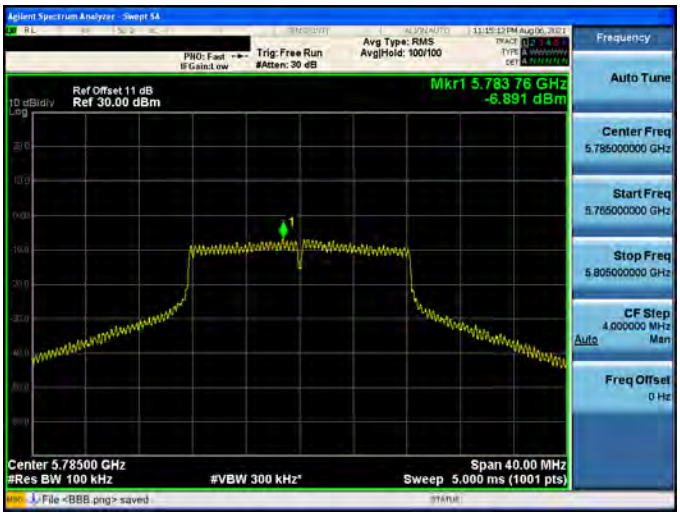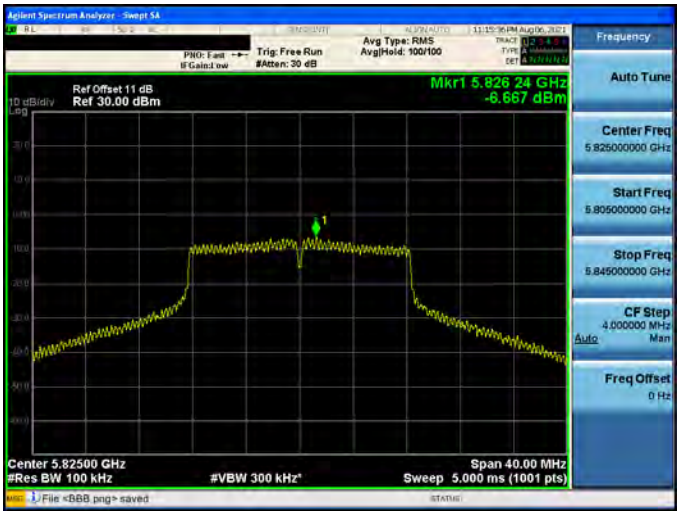
Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH157	
CH165	

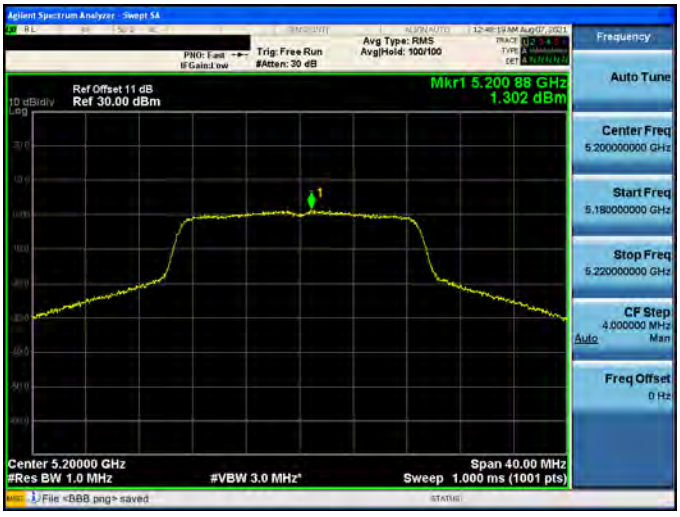
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH36	
CH40	
CH48	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH52	
CH56	
CH64	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH100	
CH112	
CH140	



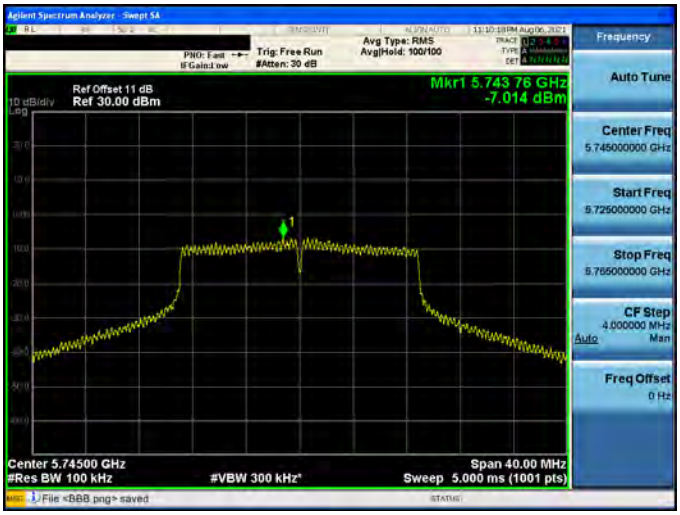
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH144	
CH144	
CH149	

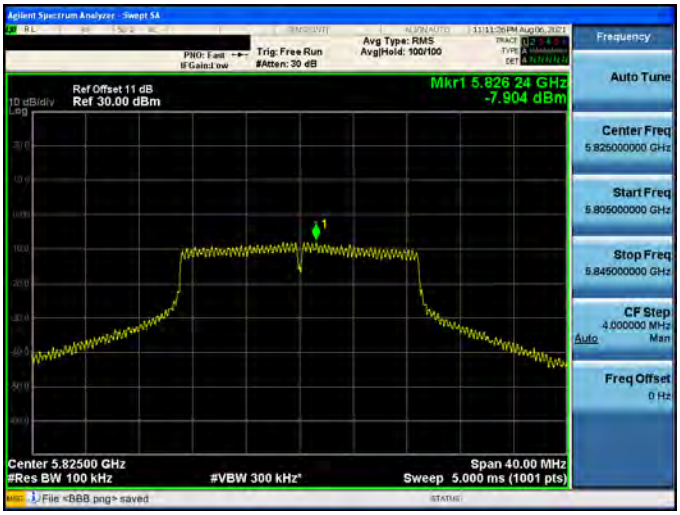Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH157	
CH165	

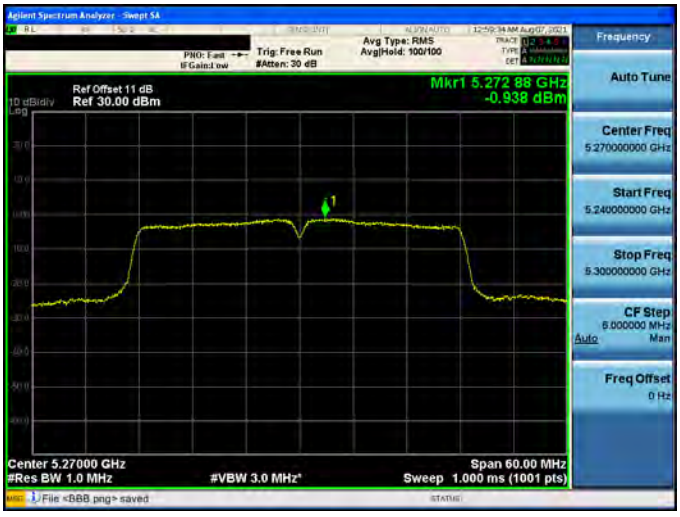Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH38	
CH46	
CH54	


Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH62	
CH102	
CH110	


Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH134	
CH142	

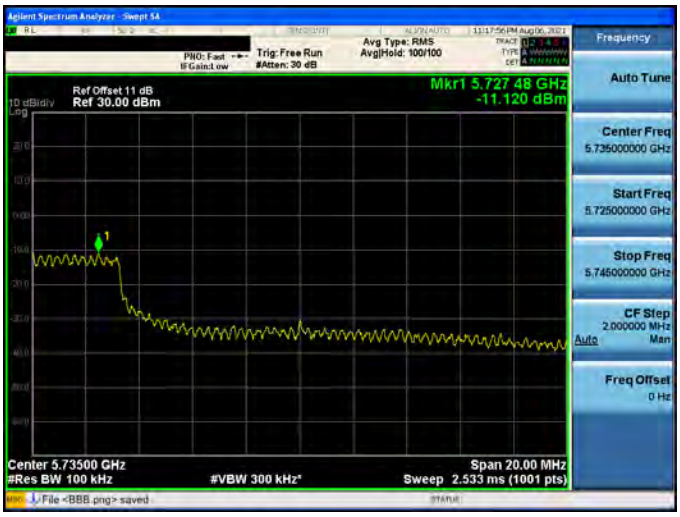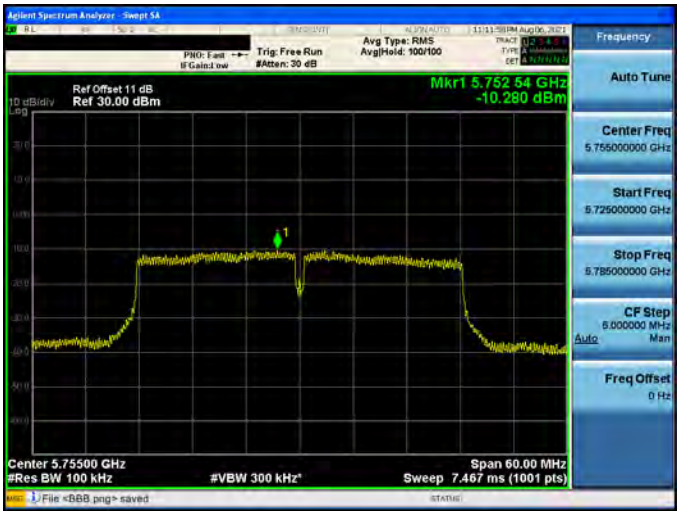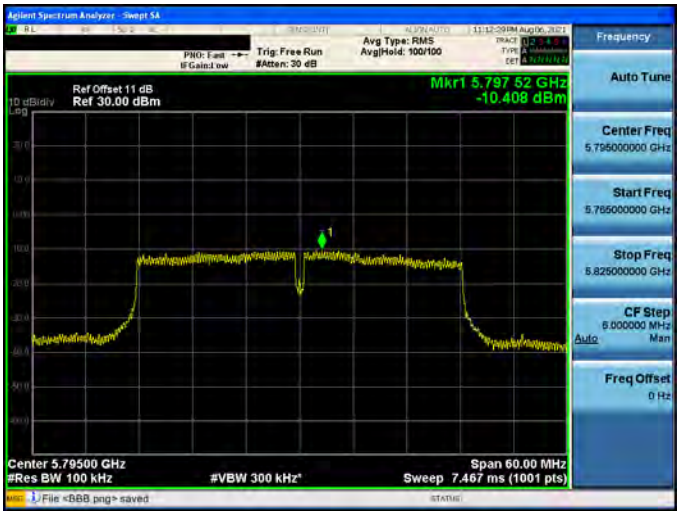Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH142	
CH151	
CH159	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH42	
CH58	
CH106	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH122	
CH138	

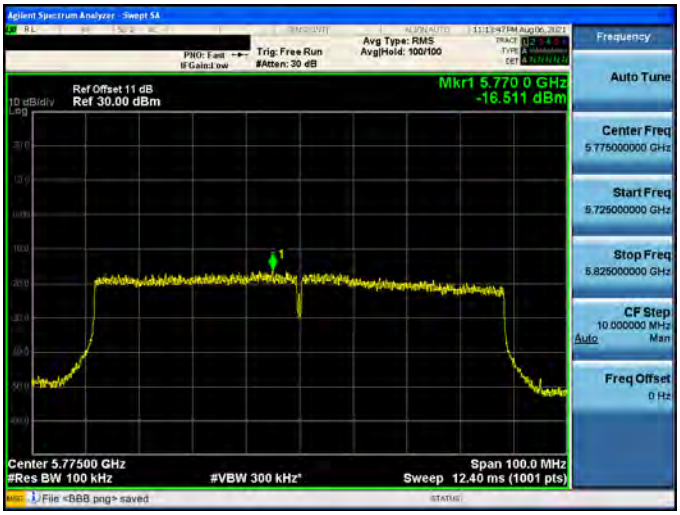Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH138	
CH155	



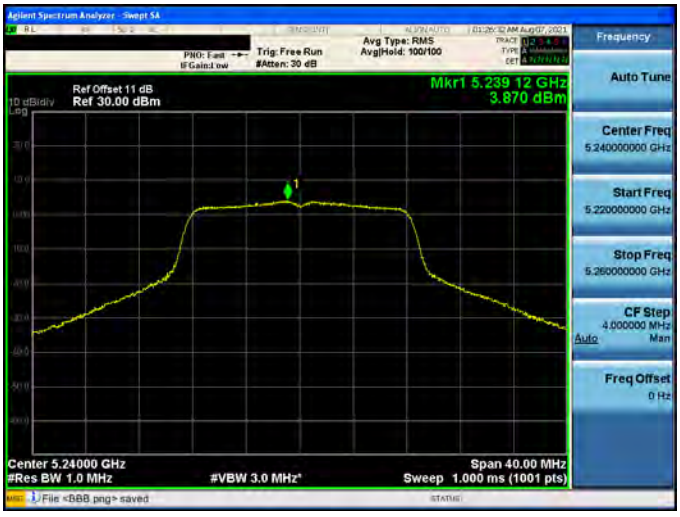
Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH36	
CH40	
CH48	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH52	
CH56	
CH64	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH100	
CH112	
CH140	


Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH144	
CH144	
CH149	


Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH157	
CH165	

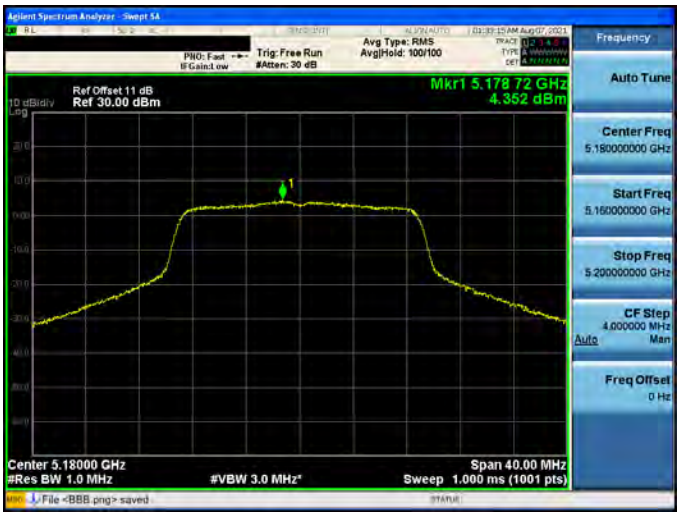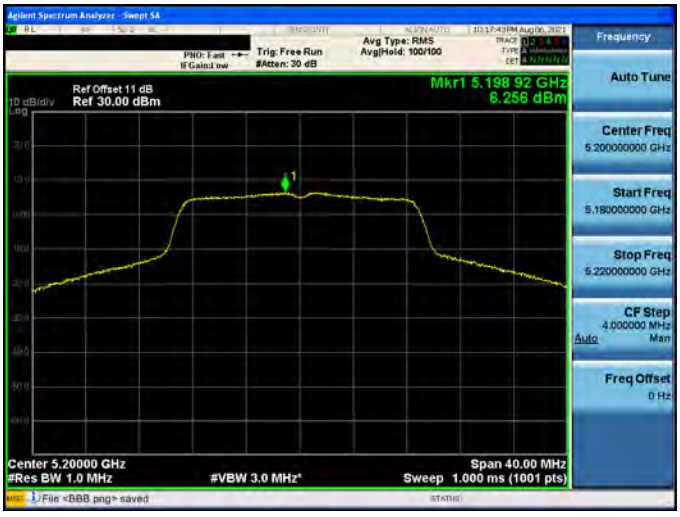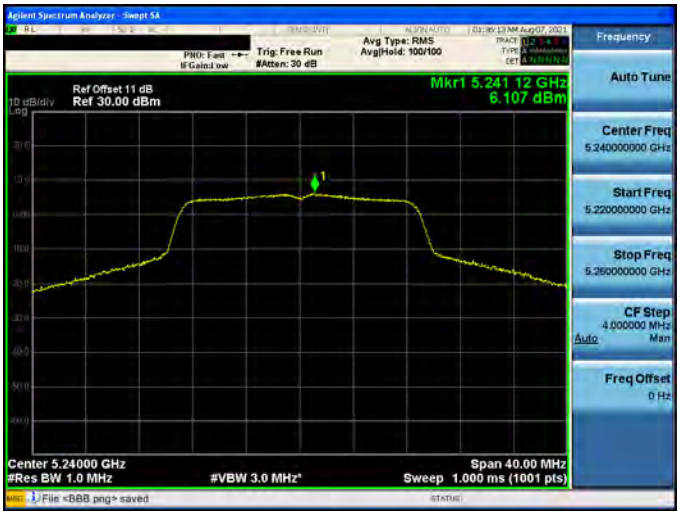Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH36	
CH40	
CH48	


Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH52	
CH56	
CH64	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH100	
CH112	
CH140	


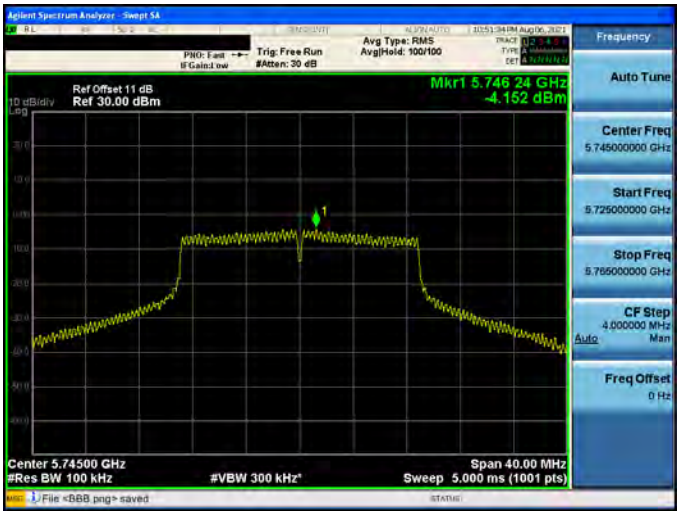
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH144	
CH144	
CH149	

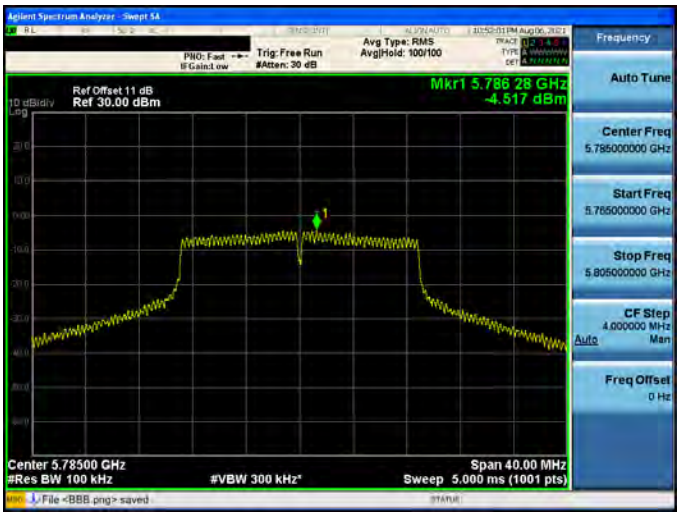
Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH157	
CH165	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH38	
CH46	
CH54	


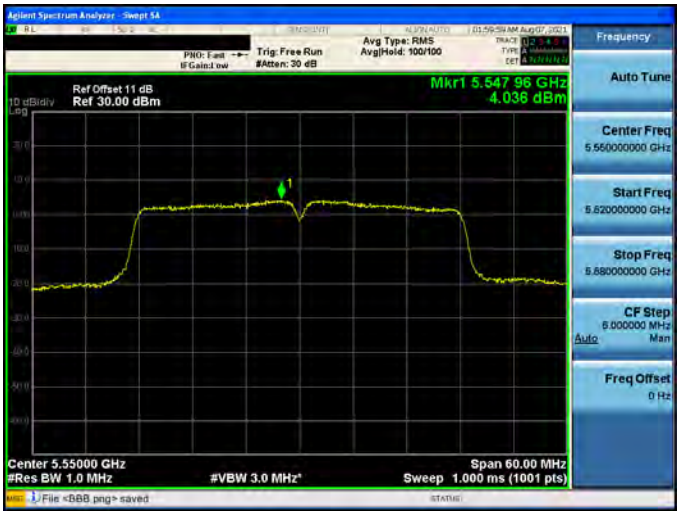
Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH62	
CH102	
CH110	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH134	
CH142	

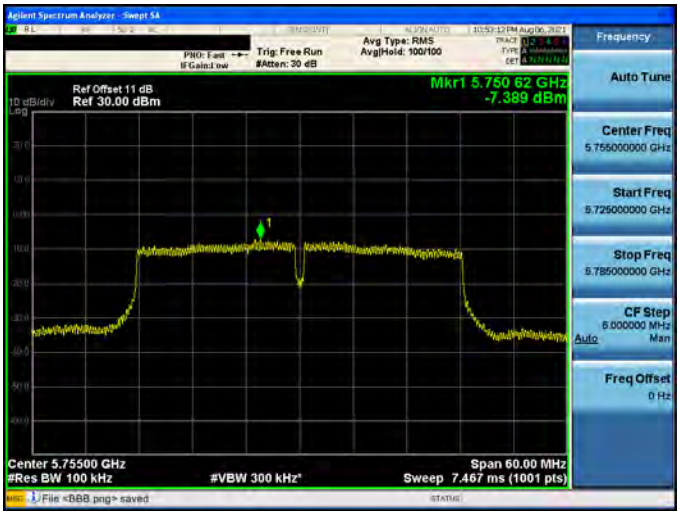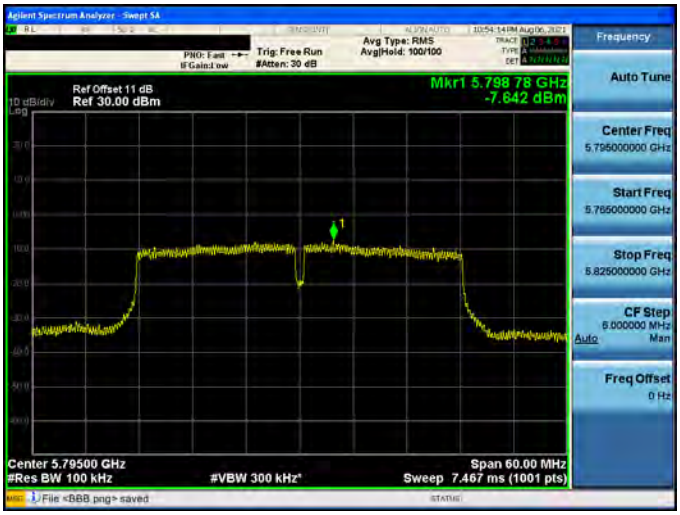Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH142	
CH151	
CH159	

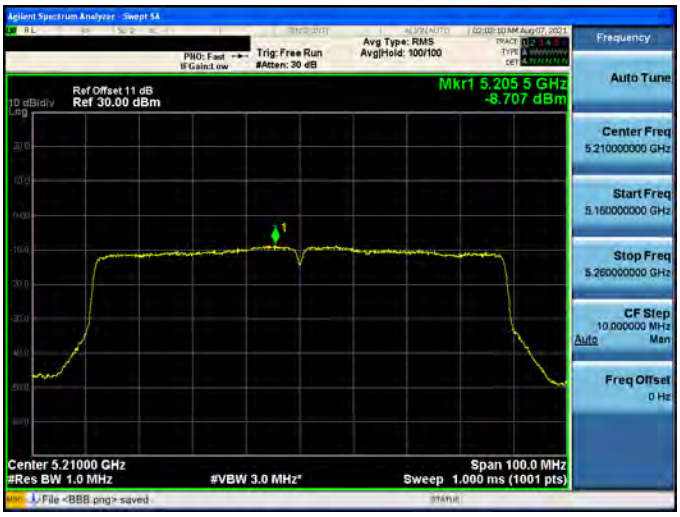Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH42	
CH58	
CH106	


Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH122	
CH138	

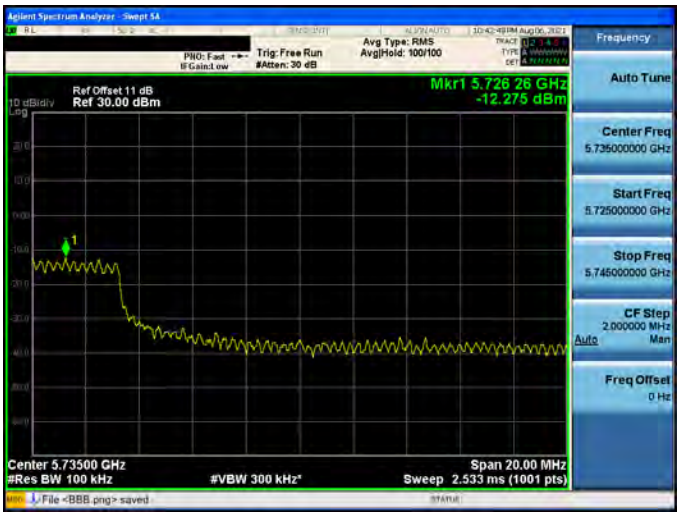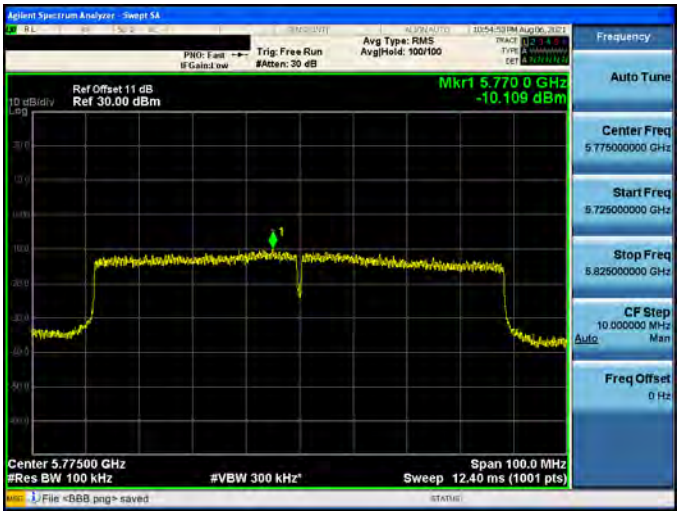
Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH138	
CH155	


26 dB Bandwidth

操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT 1	ANT 2
Mode 5	36	5180.0	26.910	27.500
	40	5200.0	32.720	25.460
	48	5240.0	32.090	27.510
	52	5260.0	33.420	26.460
	56	5280.0	28.310	32.530
	64	5320.0	26.360	30.970
	100	5500.0	32.360	33.380
	112	5560.0	31.100	33.020
	140	5700.0	28.560	31.460
	144	5720.0	21.770	21.080
Mode 6	52	5260.0	32.470	27.480
	56	5280.0	33.720	31.160
	64	5320.0	28.470	27.870
	100	5500.0	29.760	28.580
	112	5560.0	29.280	30.050
	140	5700.0	28.830	29.780
	144	5720.0	23.410	19.340
Mode 7	54	5270.0	77.960	53.650
	62	5310.0	42.010	41.320
	102	5510.0	42.130	41.830
	110	5550.0	68.810	80.480
	134	5670.0	47.350	72.510
	142	5710.0	64.010	54.970
Mode 8	36	5180.0	25.690	28.100
	40	5200.0	32.340	26.560
	48	5240.0	31.130	29.390
	52	5260.0	32.270	30.070
	56	5280.0	27.070	31.930
	64	5320.0	26.480	32.510
	100	5500.0	29.740	31.750
	112	5560.0	31.020	33.360
	140	5700.0	28.130	28.600
	144	5720.0	22.250	22.730

操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT 1	ANT 2
Mode 9	38	5190.0	42.020	41.820
	46	5230.0	42.220	52.520
	54	5270.0	81.420	51.610
	62	5310.0	41.500	41.900
	102	5510.0	41.330	41.350
	110	5550.0	62.800	67.870
	134	5670.0	43.330	43.870
	142	5710.0	55.290	52.580
Mode 10	42	5210.0	84.360	83.040
	58	5290.0	83.440	82.710
	106	5530.0	82.720	82.630
	122	5610.0	101.100	137.700
	138	5690.0	89.600	114.900

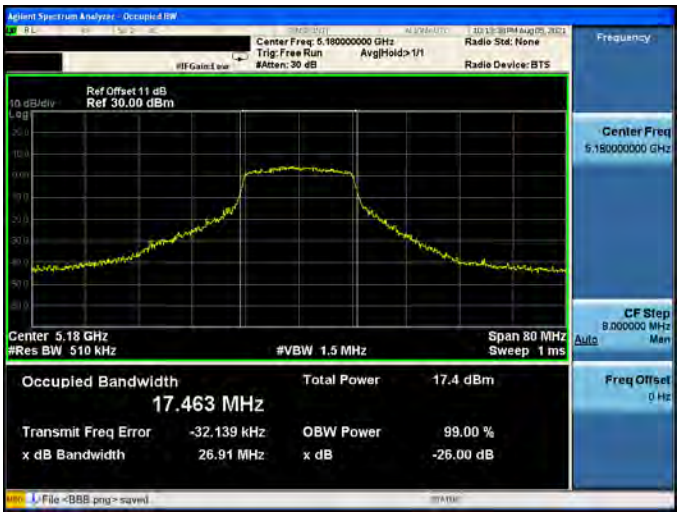Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH36	
CH40	
CH48	

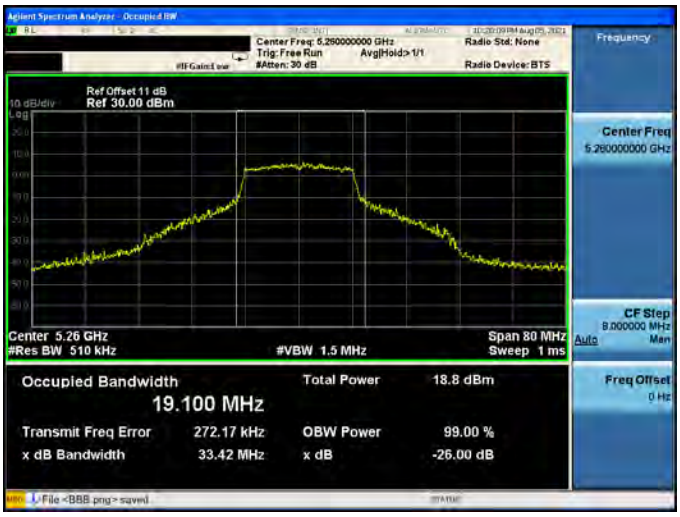Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH52	
CH56	
CH64	

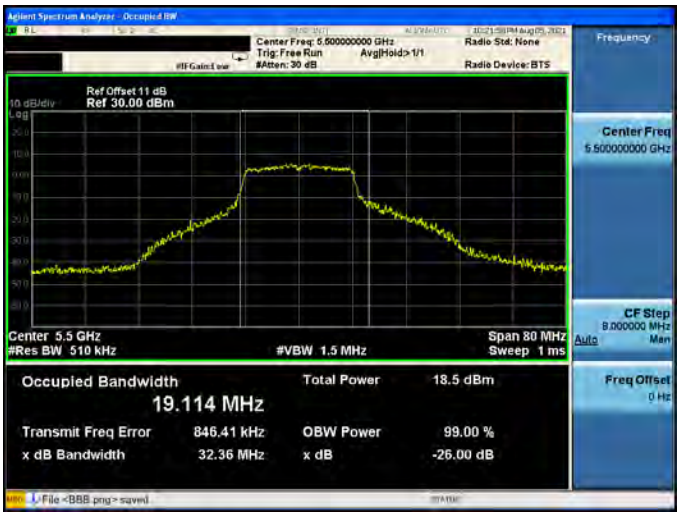Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH100	
CH112	
CH140	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH144	

Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 1	
CH52	
CH56	
CH64	

Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 1	
CH100	
CH112	
CH140	

Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 1	
CH144	

Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT 1	
CH54	
CH62	
CH102	

Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT 1	
CH110	
CH134	
CH142	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH36	
CH40	
CH48	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH52	
CH56	
CH64	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH100	
CH112	
CH140	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH144	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH38	
CH46	
CH54	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH62	
CH102	
CH110	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH134	
CH142	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH42	
CH58	
CH106	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH122	
CH138	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH36	
CH40	
CH48	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH52	
CH56	
CH64	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH100	
CH112	
CH140	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH144	


Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 2	
CH52	
CH56	
CH64	

Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 2	
CH100	
CH112	
CH140	

Mode 6: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT 2	
CH144	

Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT 2	
CH54	
CH62	
CH102	

Mode 7: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT 2	
CH110	
CH134	
CH142	

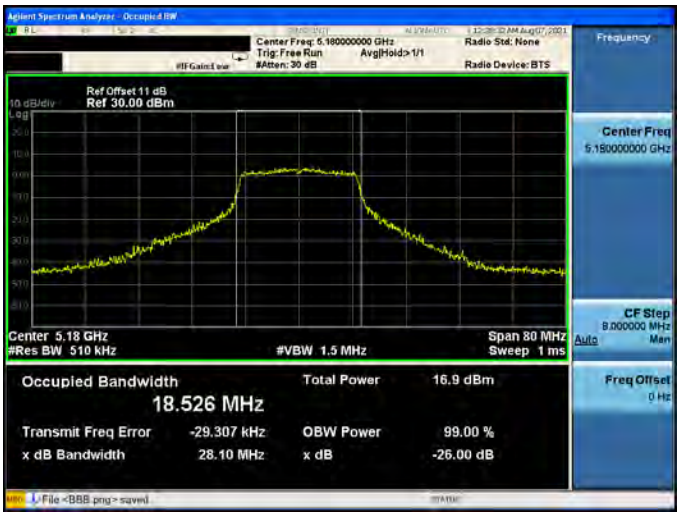Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH36	
CH40	
CH48	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH52	
CH56	
CH64	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH100	
CH112	
CH140	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH144	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH38	
CH46	
CH54	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH62	
CH102	
CH110	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH134	
CH142	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH42	
CH58	
CH106	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH122	
CH138	

6 dB Bandwidth

操作模式	頻道 (CH)	頻率 (MHz)	6 dB 頻寬量測值 (kHz)		限制值 (kHz)
			ANT 1	ANT 2	
Mode 5	144	5720.0	3180	3162	≥ 500
	149	5745.0	16020	16370	≥ 500
	157	5785.0	16390	15860	≥ 500
	165	5825.0	16140	16420	≥ 500
Mode 8	144	5720.0	3797	3886	≥ 500
	149	5745.0	16320	17340	≥ 500
	157	5785.0	16320	16090	≥ 500
	165	5825.0	15710	17590	≥ 500
Mode 9	142	5710.0	3200	3215	≥ 500
	151	5755.0	35790	35710	≥ 500
	159	5795.0	35750	36290	≥ 500
Mode 10	138	5690.0	3157	3174	≥ 500
	155	5775.0	75220	75120	≥ 500

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH144	
CH149	
CH157	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 1	
CH165	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH144	
CH149	
CH157	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 1	
CH165	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 1	
CH142	
CH151	
CH159	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 1	
CH138	
CH155	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH144	
CH149	
CH157	

Mode 5: IEEE 802.11a Continuous TX Mode_ANT 2	
CH165	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH144	
CH149	
CH157	

Mode 8: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT 2	
CH165	

Mode 9: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT 2	
CH142	
CH151	
CH159	

Mode 10: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT 2	
CH138	
CH155	

發射功率控制(TPC)

測試結果	：	Mode 5: EIRP =	261.198 mW	< 500 mW	，故不需評估發射功率控制(TPC)。
		Mode 6: EIRP =	476.895 mW	< 500 mW	，故不需評估發射功率控制(TPC)。
		Mode 7: EIRP =	470.159 mW	< 500 mW	，故不需評估發射功率控制(TPC)。
		Mode 8: EIRP =	496.265 mW	< 500 mW	，故不需評估發射功率控制(TPC)。
		Mode 9: EIRP =	485.876 mW	< 500 mW	，故不需評估發射功率控制(TPC)。
		Mode 10: EIRP =	388.983 mW	< 500 mW	，故不需評估發射功率控制(TPC)。

動態頻率選擇(DFS)

操作模式	：	Mode 10
測試結果	：	不適用，此產品為受控裝置，因此不須評估動態頻率選擇(DFS)


頻道可用性檢查時間

操作模式	：	Mode 10
測試結果	：	不適用；此產品為受控裝置，因此不須評估頻道可用性檢查時間

頻道移動時間

操作模式	Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
Mode 10	5610	Type 0	0.4170	10

操作模式	Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
Mode 10	5610	Type 0	31.9992	200

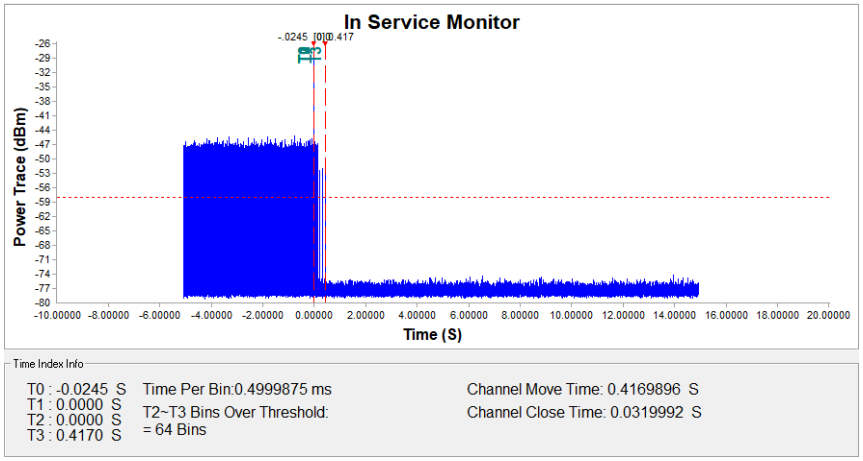Mode 10 IEEE 802.11ac 80 MHz Continuous TX Mode	
Channel Move Time / Channel Closing Transmission Time	

不可佔用時間

Mode 10 IEEE 802.11ac 80 MHz Continuous TX Mode	
Non-Occupancy Period	

電波暴露量之評估

Band	Frequency (MHz)	Limit (mW/cm^2)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm^2)
WLAN 2.4 GHz	2412-2462	1	20	18.38	6.51	4.48	1	308.516	0.0614
WLAN 5 GHz	5180-5825	1	20	18.64	8.55	7.16	1	523.688	**0.1042**

---END---