



Appendix A

Frequency Error


Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	2412	Ant1	2412.001	1000	0.41	50	Pass
NVNT	2442	Ant1	2442.002	2000	0.82	50	Pass
NVNT	2472	Ant1	2472.005	5000	2.02	50	Pass

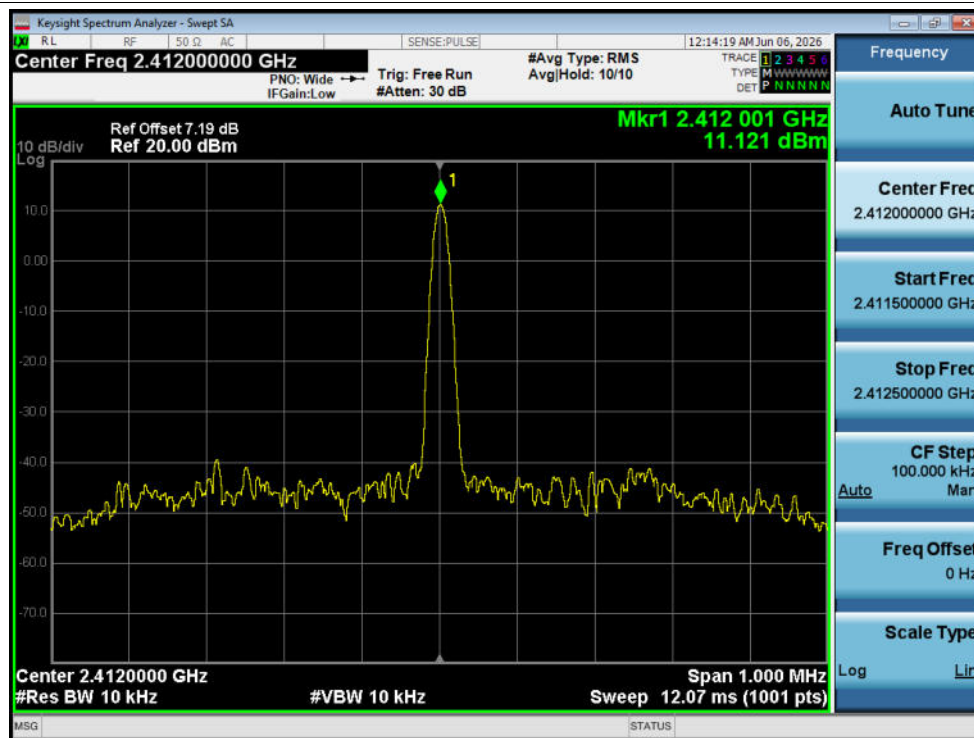

Freq. Error NVNT 2412MHz Ant1

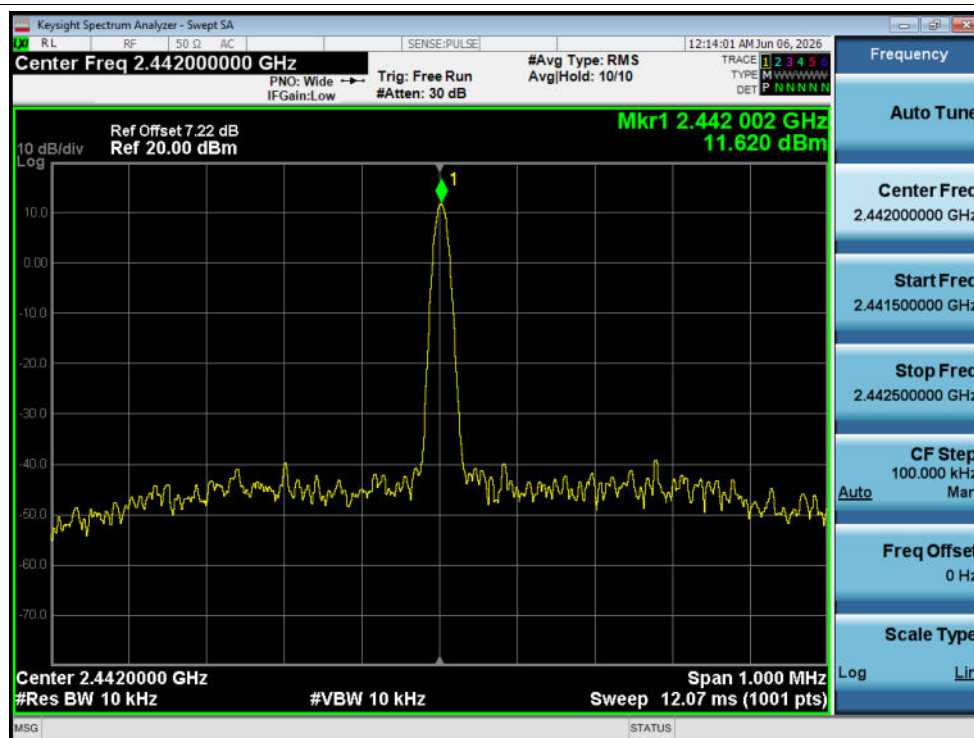


Freq. Error NVNT 2442MHz Ant1

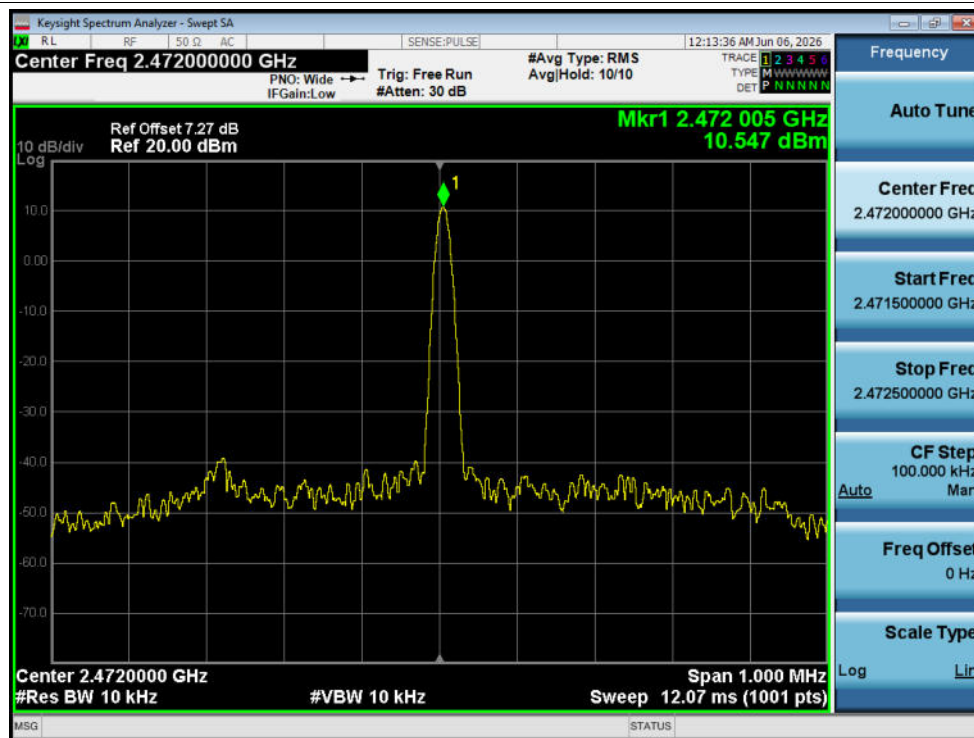


Freq. Error NVNT 2472MHz Ant1

Antenna Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Lower Limit (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant1	6.29	4.256	10	6	-29.07	-	20	Pass
NVNT	b	2442	Ant1	6.76	4.742	10	6	-20.96	-	20	Pass
NVNT	b	2472	Ant1	6.77	4.753	10	6	-20.78	-	20	Pass
NVNT	g	2412	Ant1	3.19	2.084	10	5	-58.31	-	20	Pass
NVNT	g	2442	Ant1	3.89	2.449	10	5	-51.02	-	20	Pass
NVNT	g	2472	Ant1	3.93	2.472	10	5	-50.57	-	20	Pass
NVNT	n20	2412	Ant1	2.76	1.888	10	3	-37.07	-	20	Pass
NVNT	n20	2442	Ant1	3.66	2.323	10	3	-22.58	-	20	Pass
NVNT	n20	2472	Ant1	3.57	2.275	10	3	-24.16	-	20	Pass

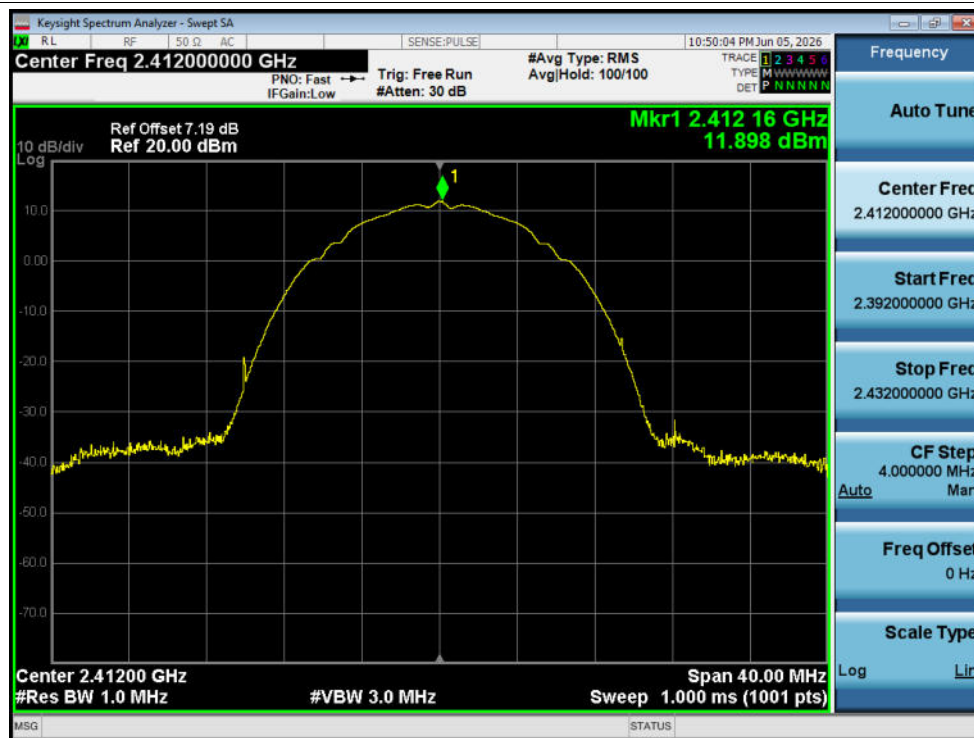


Power NVNT b 2412MHz Ant1 Pre Scan

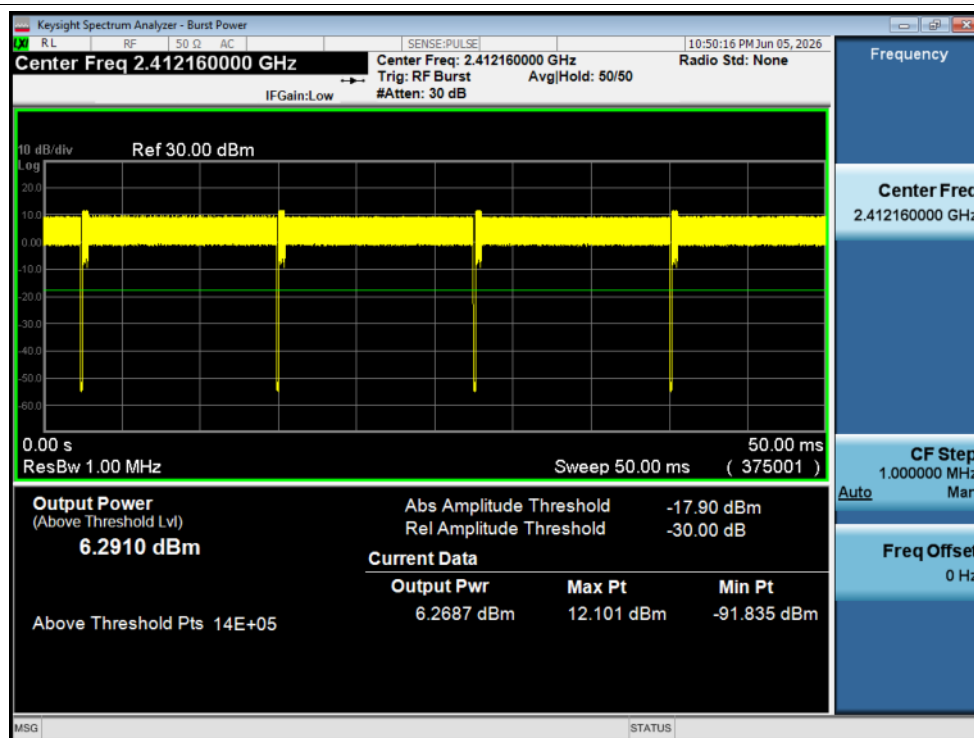


Power NVNT b 2412MHz Ant1 Zero Span

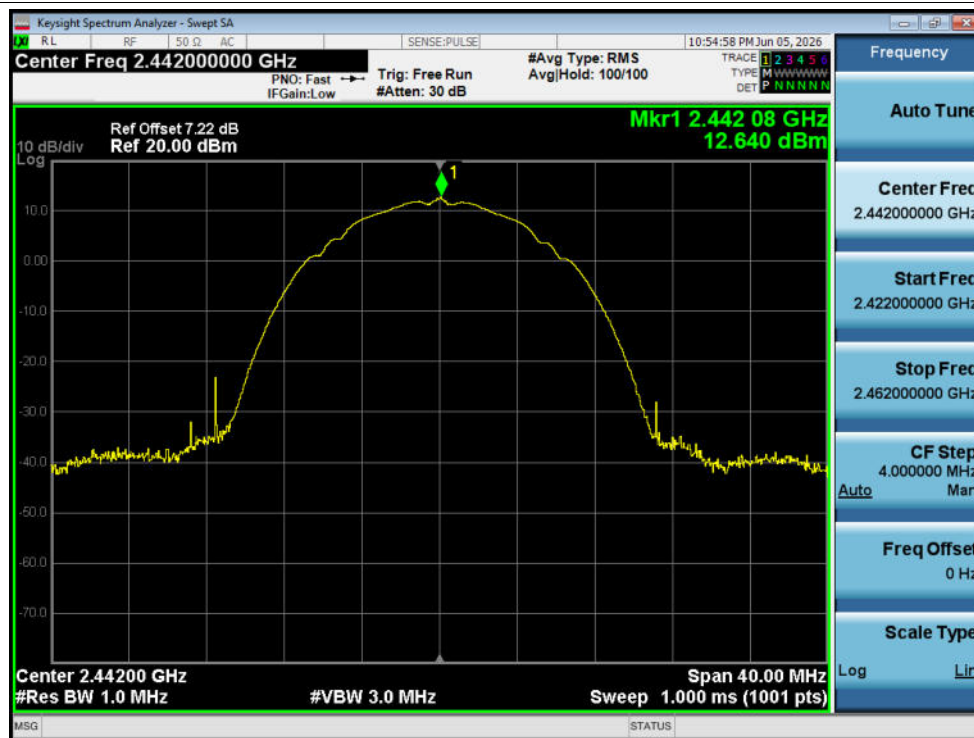


Power NVNT b 2442MHz Ant1 Pre Scan

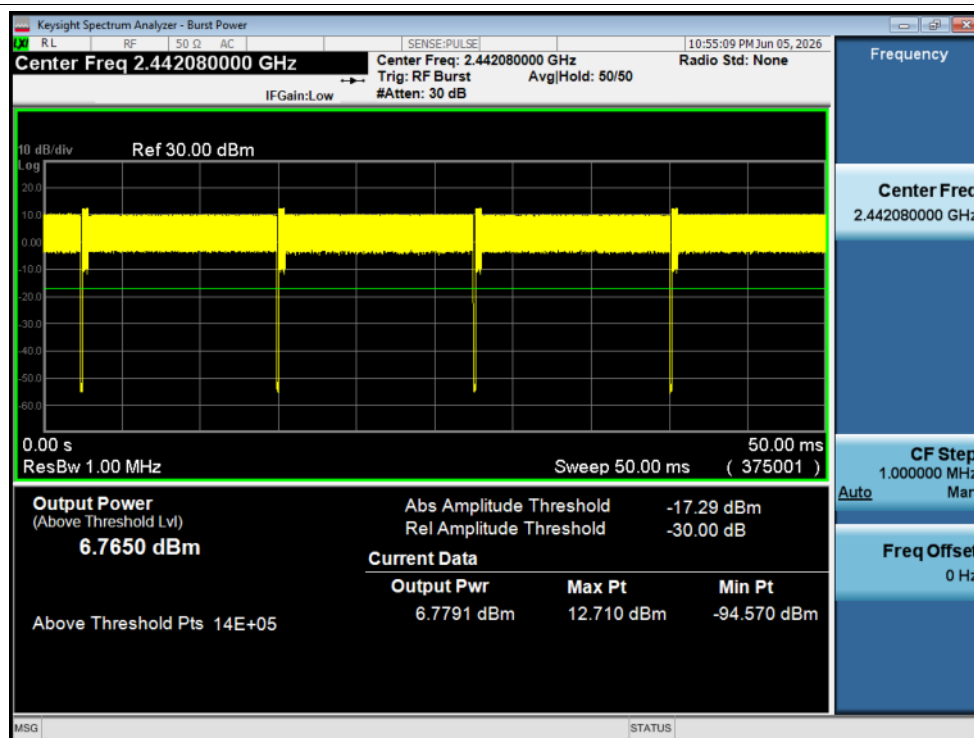

Power NVNT b 2442MHz Ant1 Zero Span

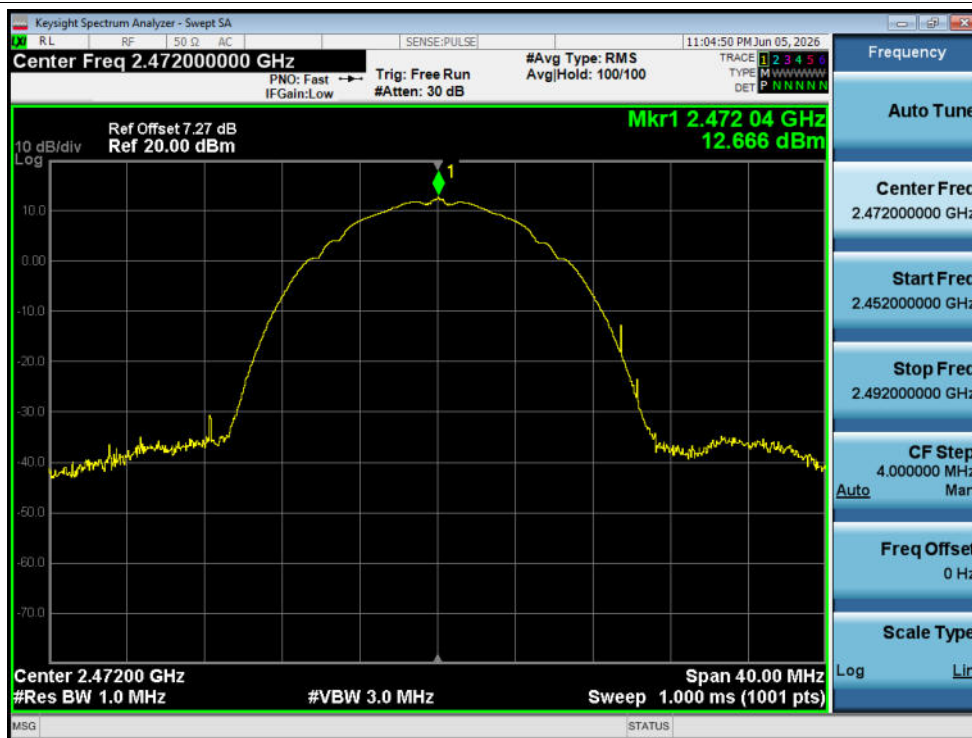


Power NVNT b 2472MHz Ant1 Pre Scan

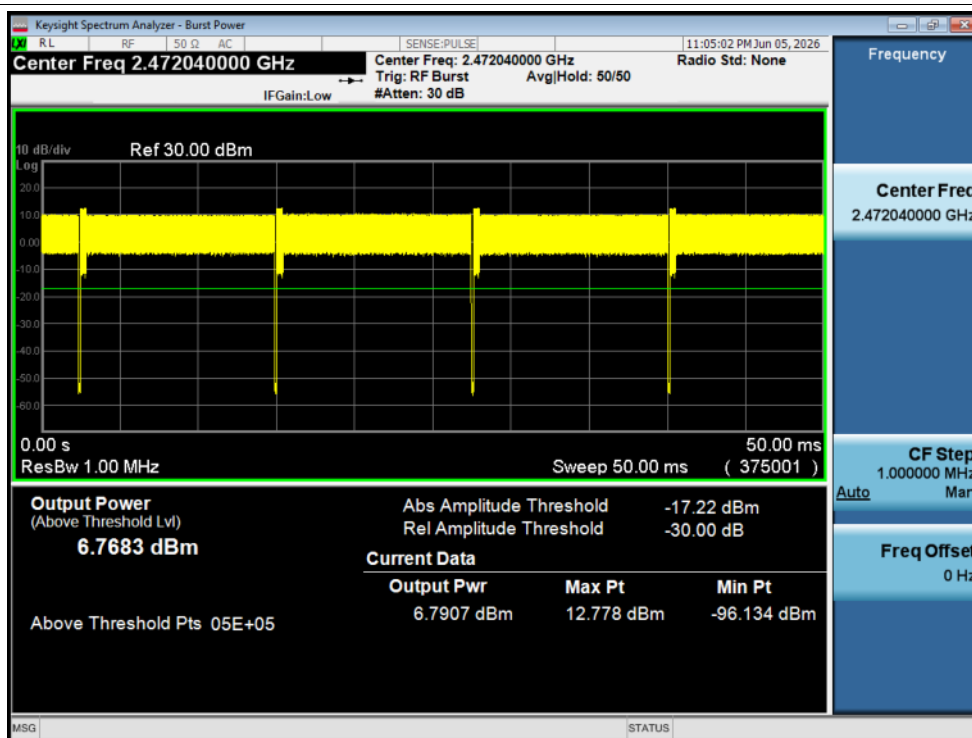


Power NVNT b 2472MHz Ant1 Zero Span




Power NVNT g 2412MHz Ant1 Pre Scan

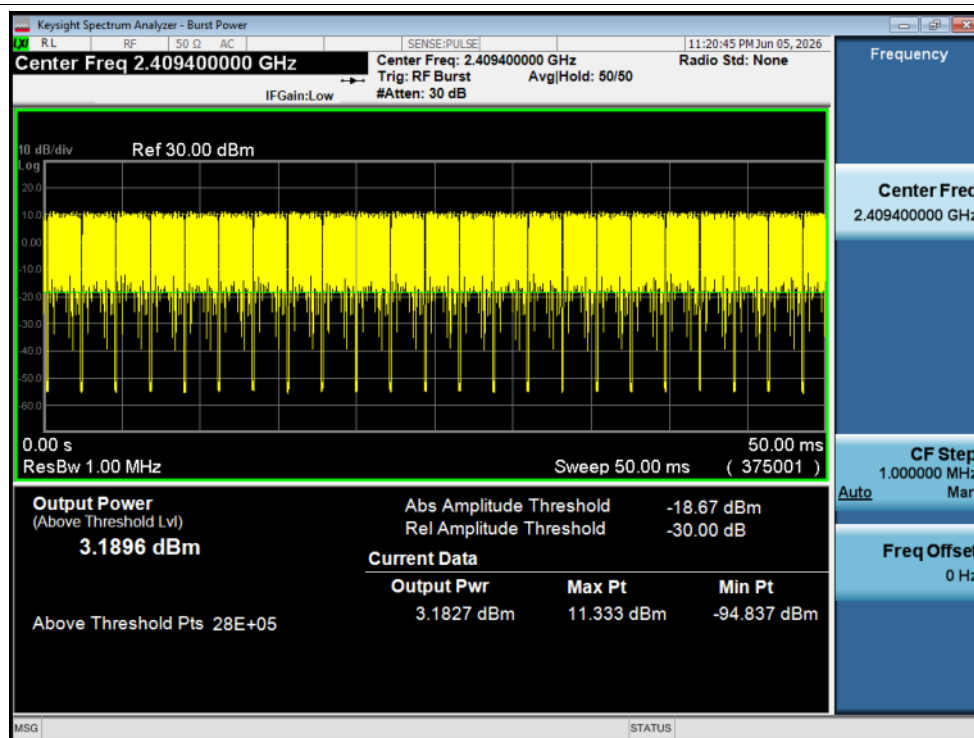

Power NVNT g 2412MHz Ant1 Zero Span

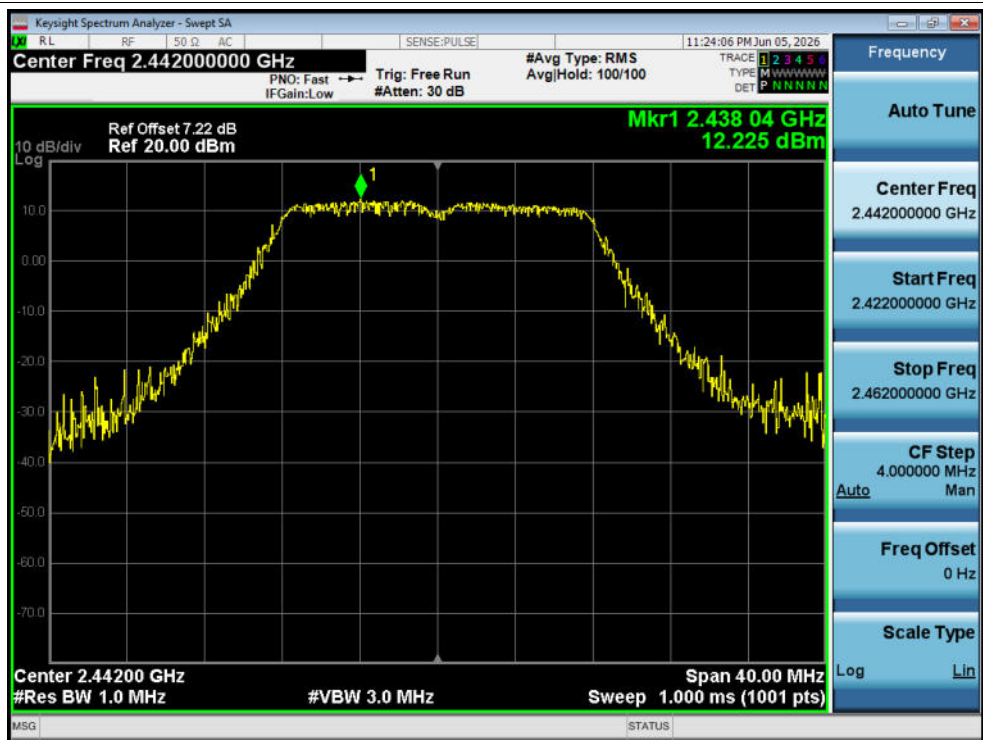


Power NVNT g 2442MHz Ant1 Pre Scan

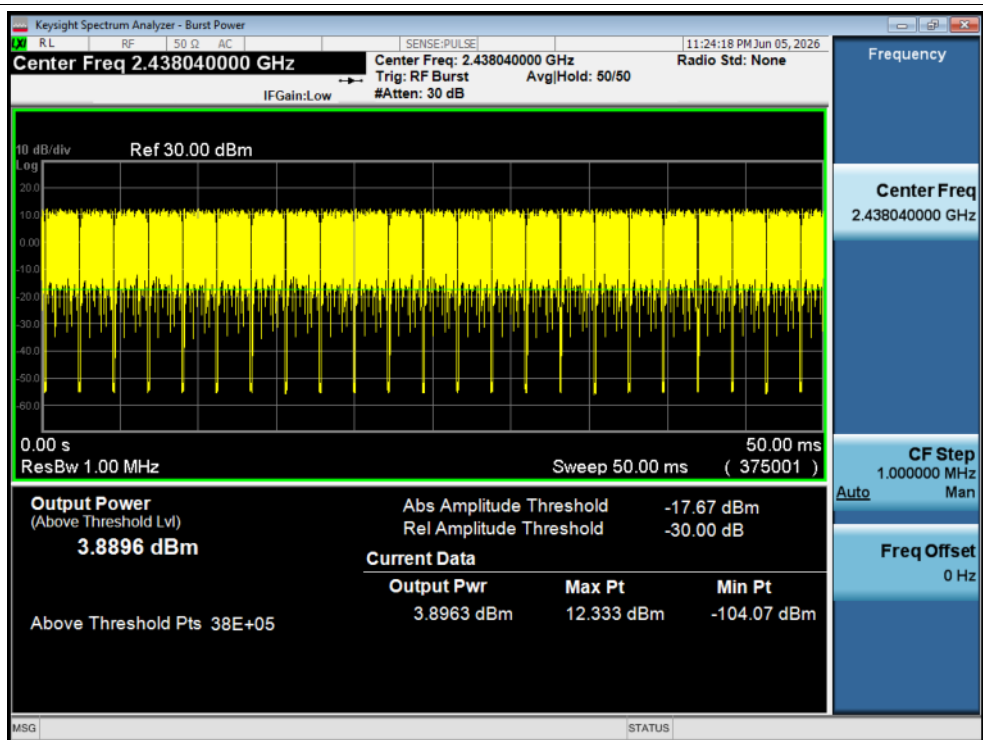

Power NVNT g 2442MHz Ant1 Zero Span




Power NVNT g 2472MHz Ant1 Pre Scan

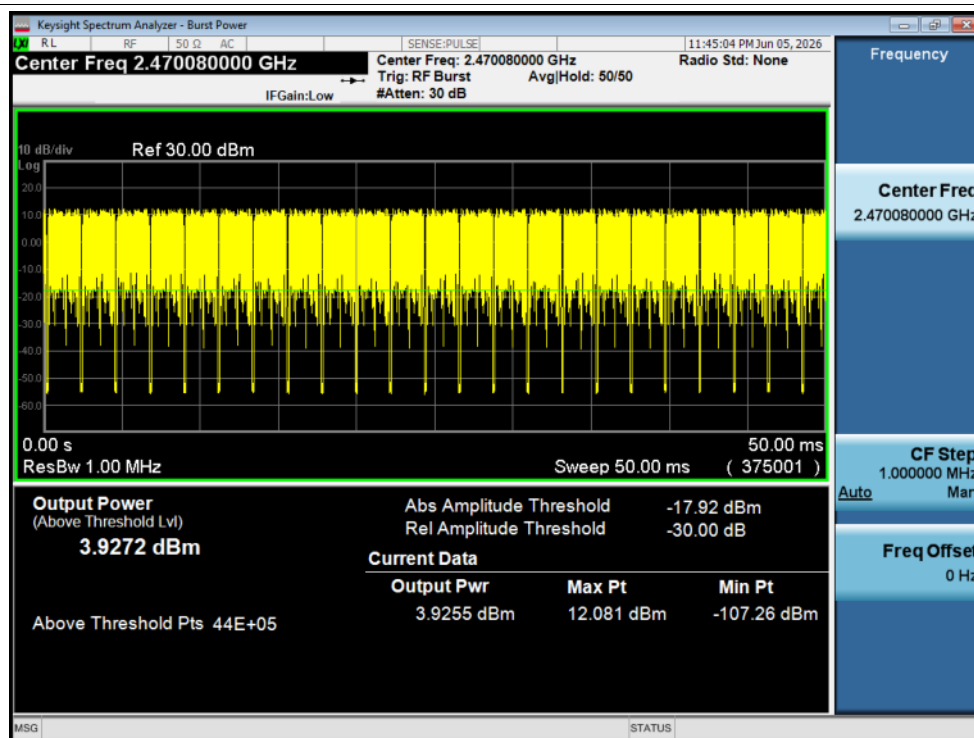


Power NVNT g 2472MHz Ant1 Zero Span




Power NVNT n20 2412MHz Ant1 Pre Scan

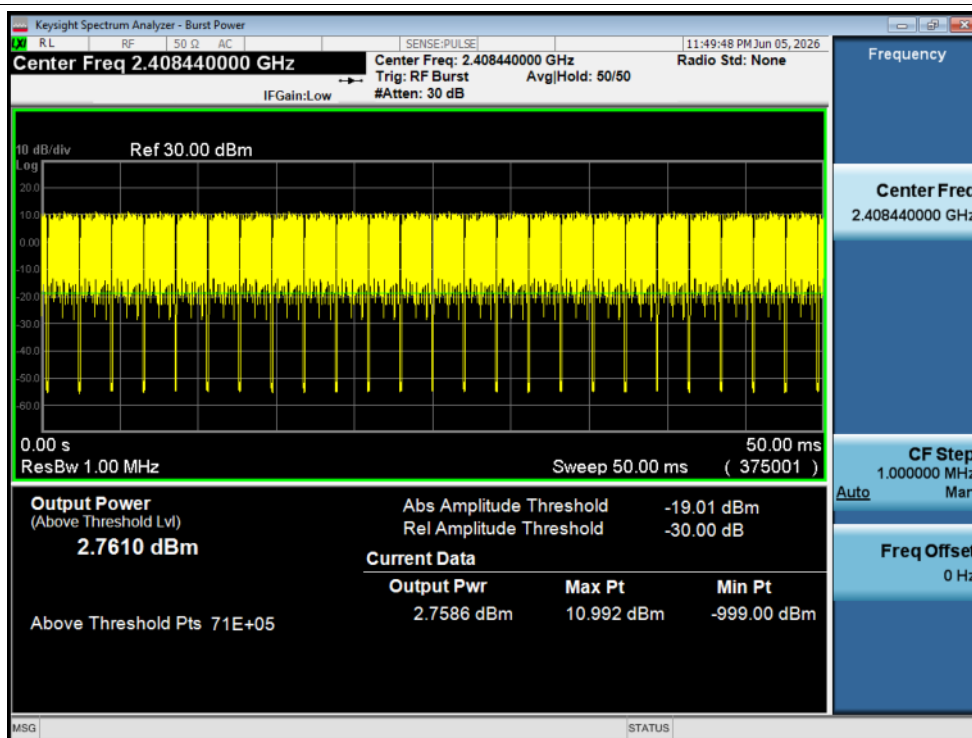

Power NVNT n20 2412MHz Ant1 Zero Span

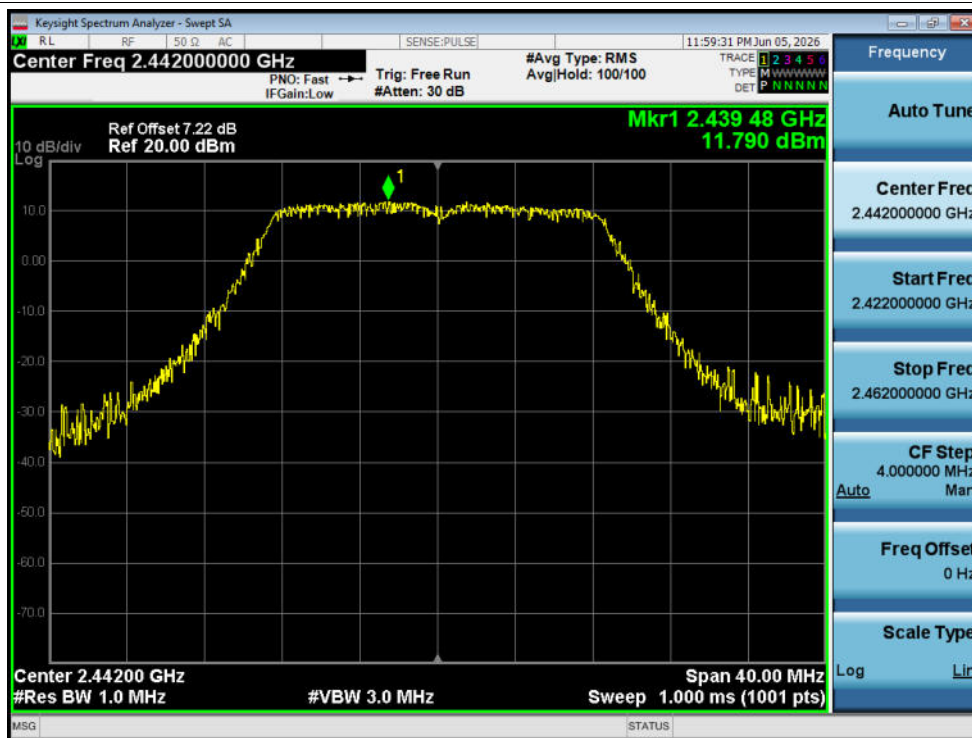

Power NVNT n20 2442MHz Ant1 Pre Scan

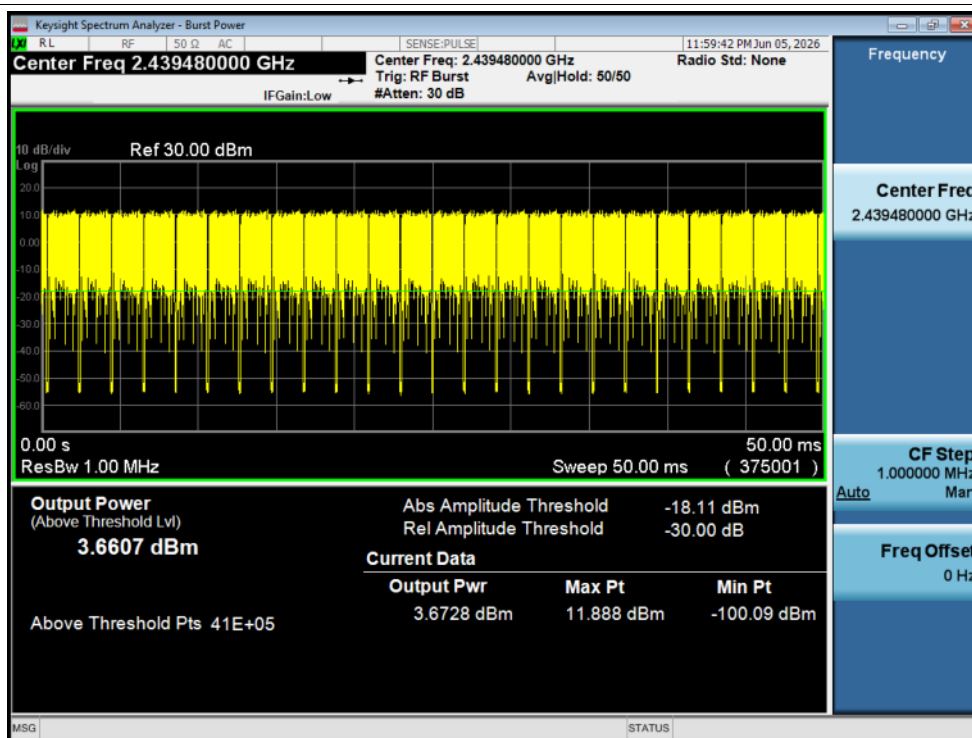

Power NVNT n20 2442MHz Ant1 Zero Span



Power NVNT n20 2472MHz Ant1 Pre Scan




Power NVNT n20 2472MHz Ant1 Zero Span

EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Gain (dBi)	EIRP (dBm/MHz)	EIRP (mW/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	6.29	4.256	3.5	9.79	9.528	12.14	Pass
NVNT	b	2442	Ant1	6.76	4.742	3.5	10.26	10.617	12.14	Pass
NVNT	b	2472	Ant1	6.77	4.753	3.5	10.27	10.641	12.14	Pass
NVNT	g	2412	Ant1	3.19	2.084	3.5	6.69	4.667	12.14	Pass
NVNT	g	2442	Ant1	3.89	2.449	3.5	7.39	5.483	12.14	Pass
NVNT	g	2472	Ant1	3.93	2.472	3.5	7.43	5.534	12.14	Pass
NVNT	n20	2412	Ant1	2.76	1.888	3.5	6.26	4.227	12.14	Pass
NVNT	n20	2442	Ant1	3.66	2.323	3.5	7.16	5.2	12.14	Pass
NVNT	n20	2472	Ant1	3.57	2.275	3.5	7.07	5.093	12.14	Pass

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Lower Limit (MHz)	Upper Limit (MHz)	Verdict
NVNT	b	2412	Ant1	14.102	N/A	26	Pass
NVNT	b	2442	Ant1	14.029	N/A	26	Pass
NVNT	b	2472	Ant1	13.936	N/A	26	Pass
NVNT	g	2412	Ant1	16.939	N/A	26	Pass
NVNT	g	2442	Ant1	16.774	N/A	26	Pass
NVNT	g	2472	Ant1	16.72	N/A	26	Pass
NVNT	n20	2412	Ant1	18.004	N/A	26	Pass
NVNT	n20	2442	Ant1	17.916	N/A	26	Pass
NVNT	n20	2472	Ant1	17.846	N/A	26	Pass

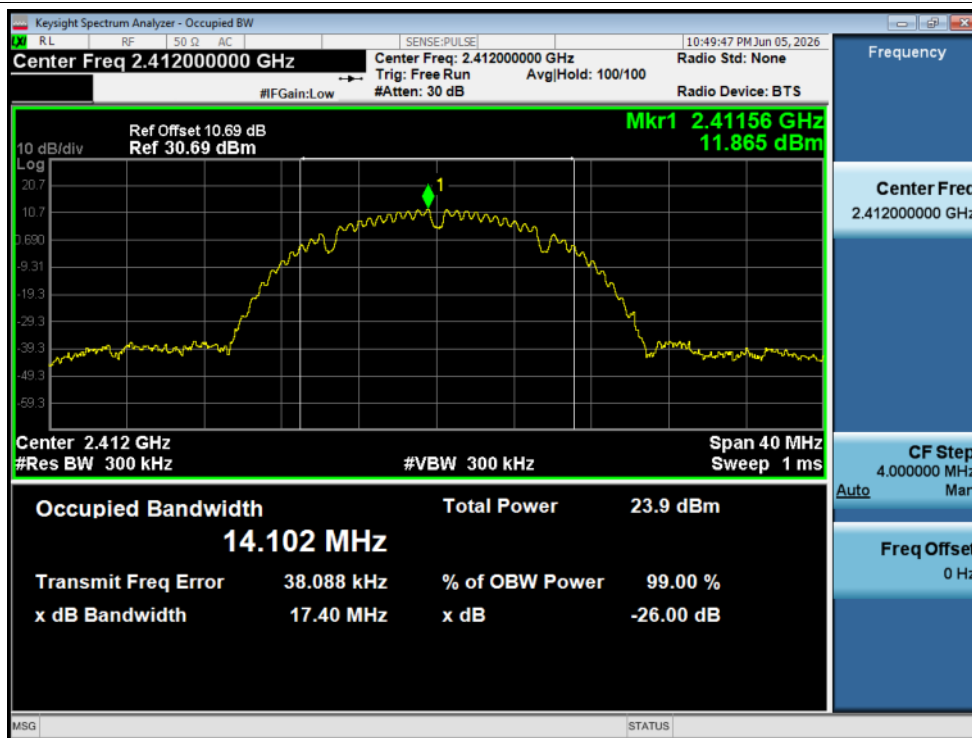


OBW NVNT b 2412MHz Ant1

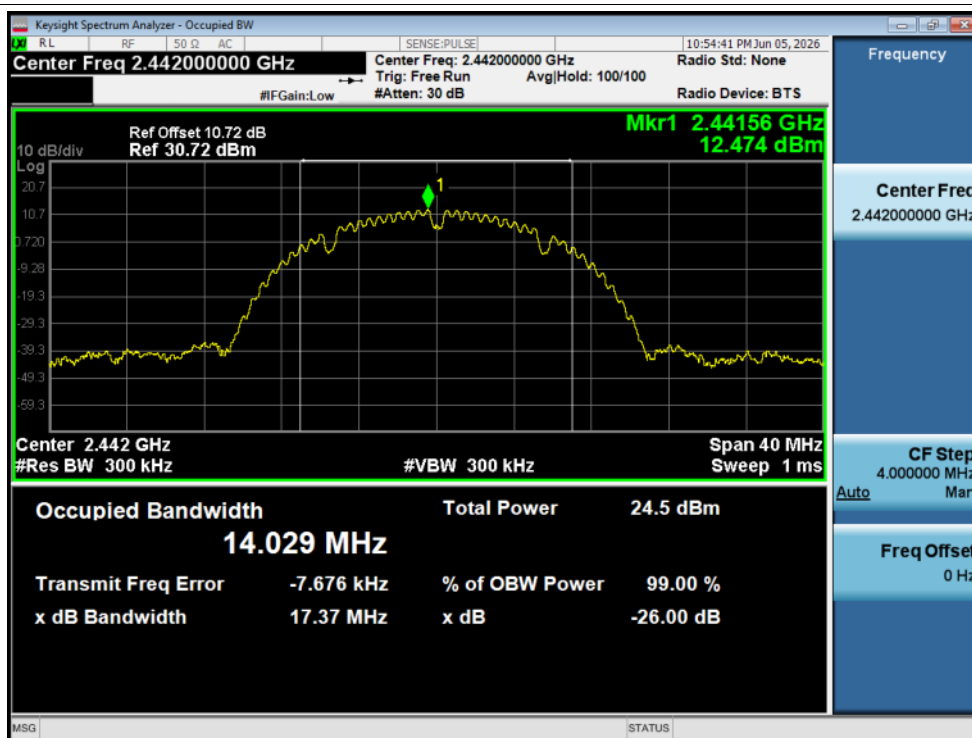


OBW NVNT b 2442MHz Ant1

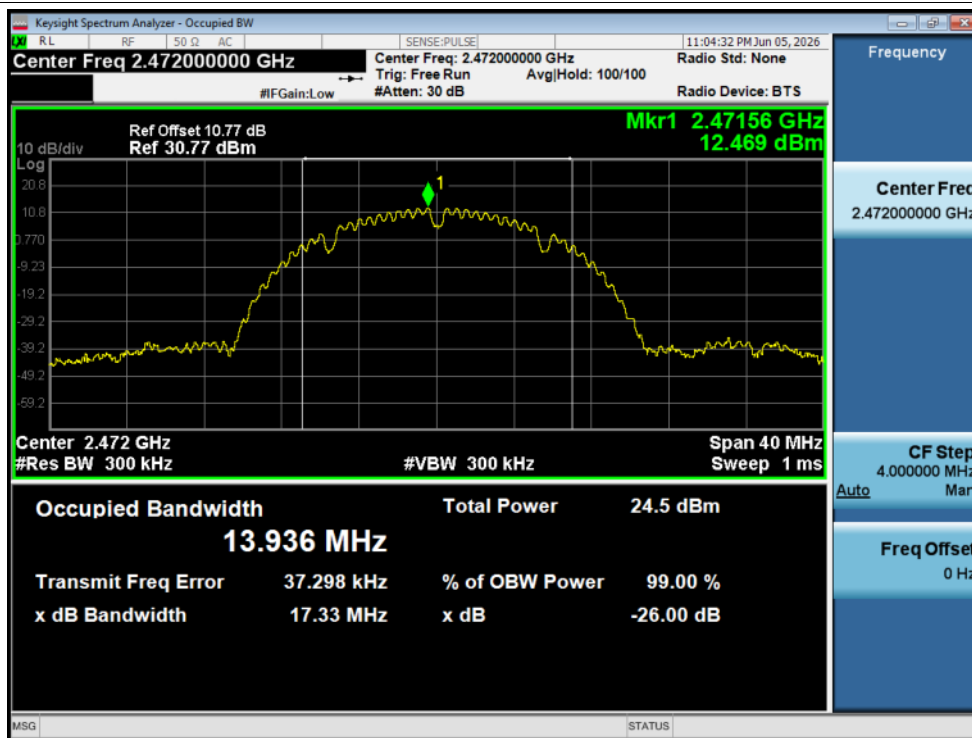


OBW NVNT b 2472MHz Ant1

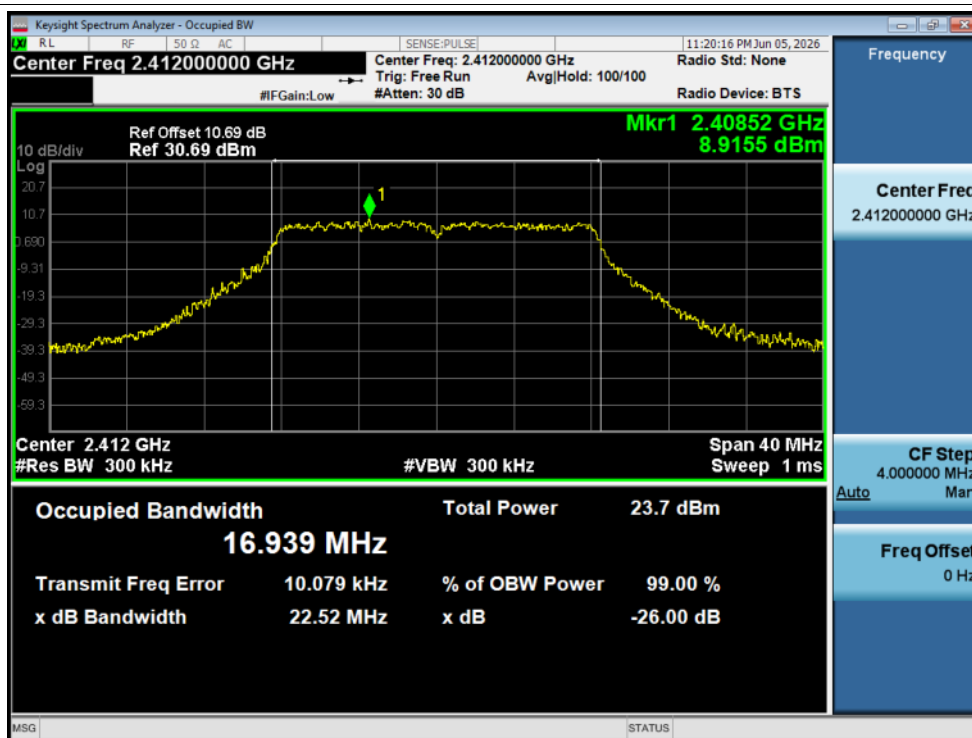

OBW NVNT g 2412MHz Ant1

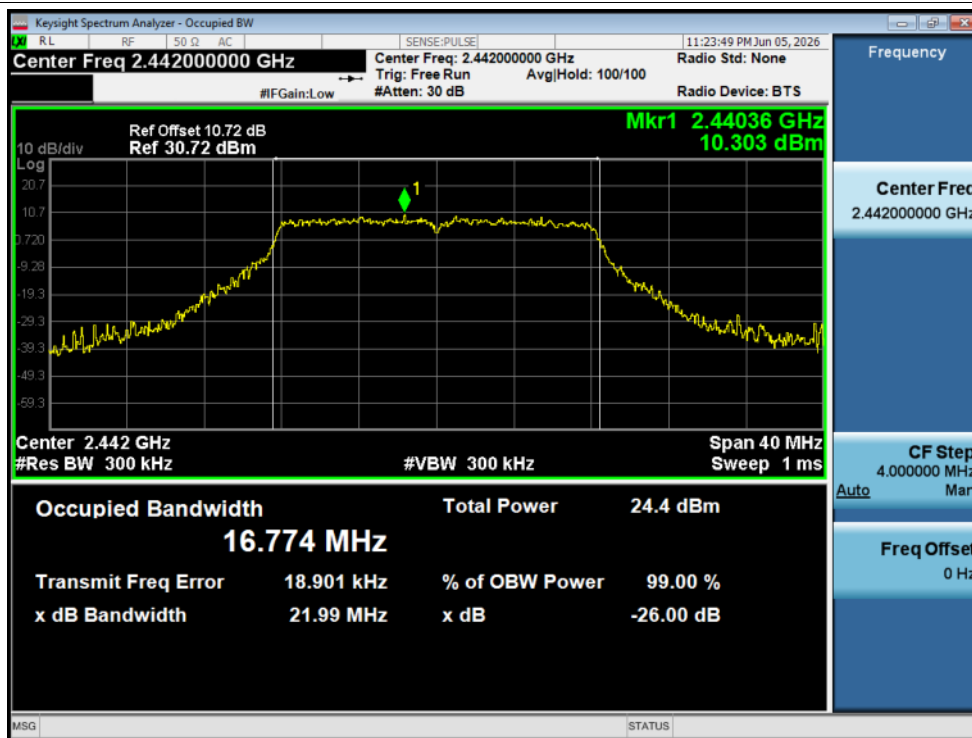


OBW NVNT g 2442MHz Ant1

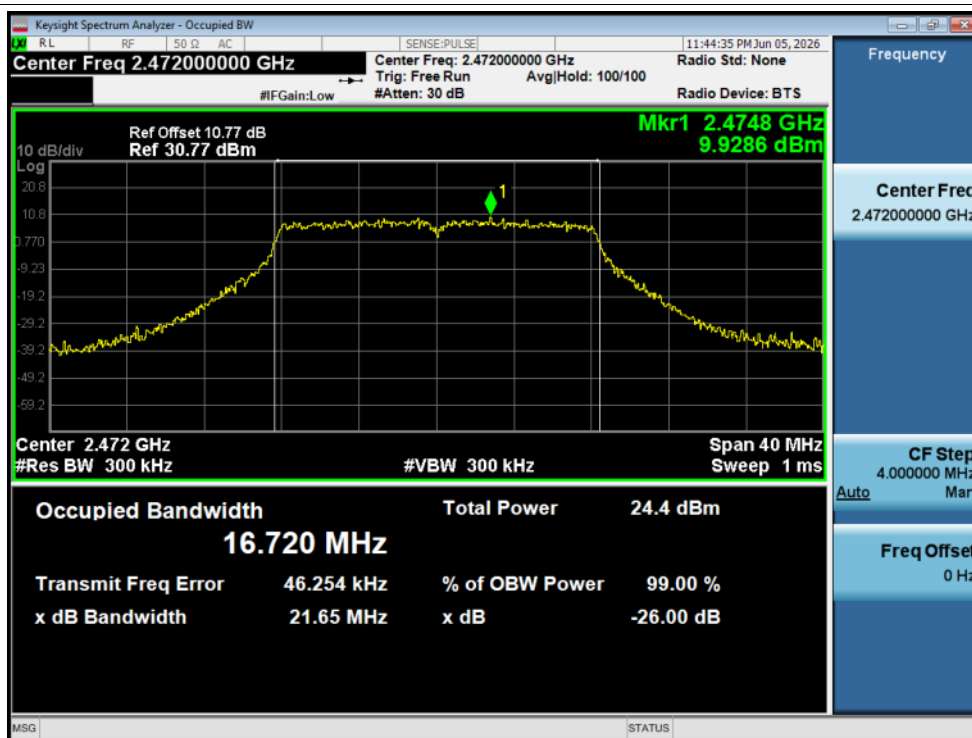

OBW NVNT g 2472MHz Ant1




OBW NVNT n20 2412MHz Ant1

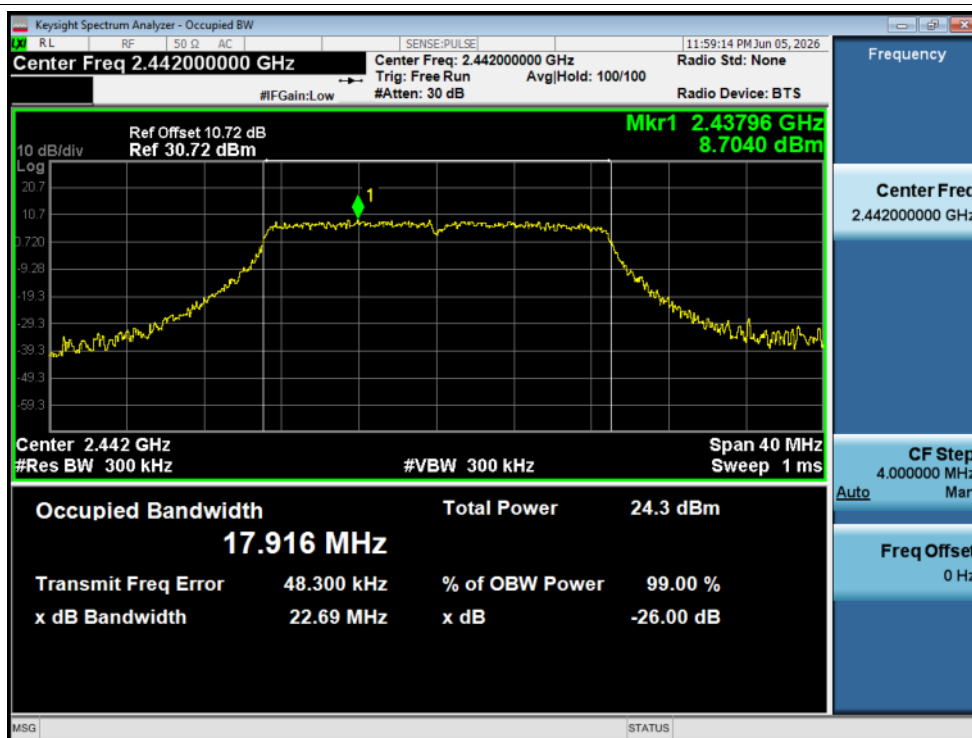

OBW NVNT n20 2442MHz Ant1

Spreading Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	90% OBW (MHz)
NVNT	b	2412	Ant1	9.1383
NVNT	b	2442	Ant1	9.0953
NVNT	b	2472	Ant1	9.0262
NVNT	g	2412	Ant1	14.847
NVNT	g	2442	Ant1	14.633
NVNT	g	2472	Ant1	14.554
NVNT	n20	2412	Ant1	15.817
NVNT	n20	2442	Ant1	15.688
NVNT	n20	2472	Ant1	15.615

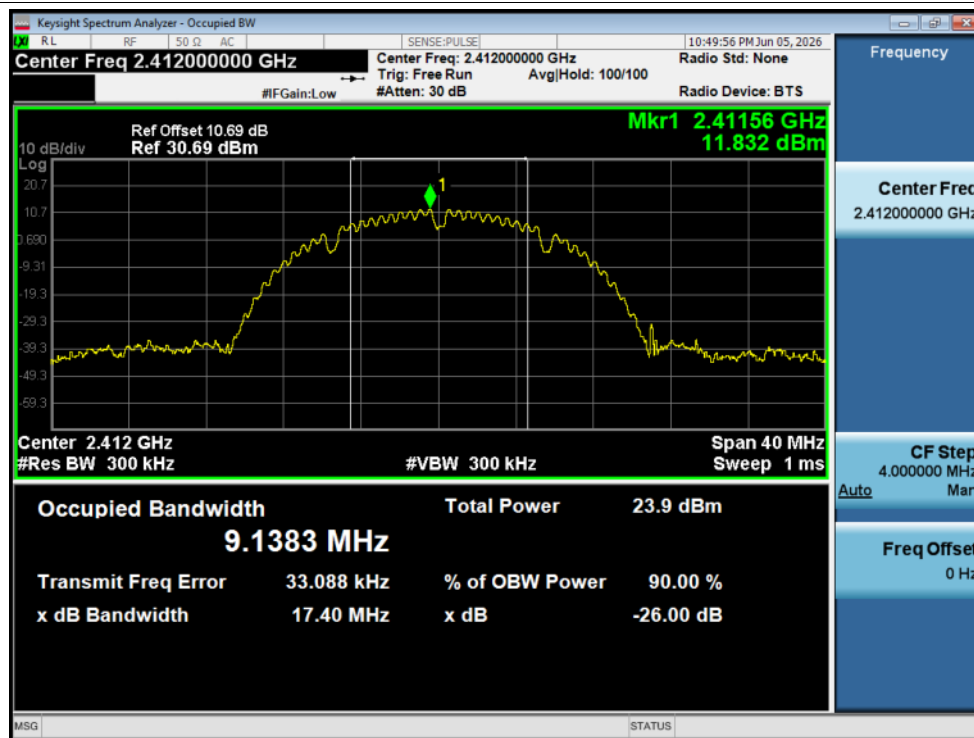


Spreading Bandwidth NVNT b 2412MHz Ant1




Spreading Bandwidth NVNT b 2442MHz Ant1

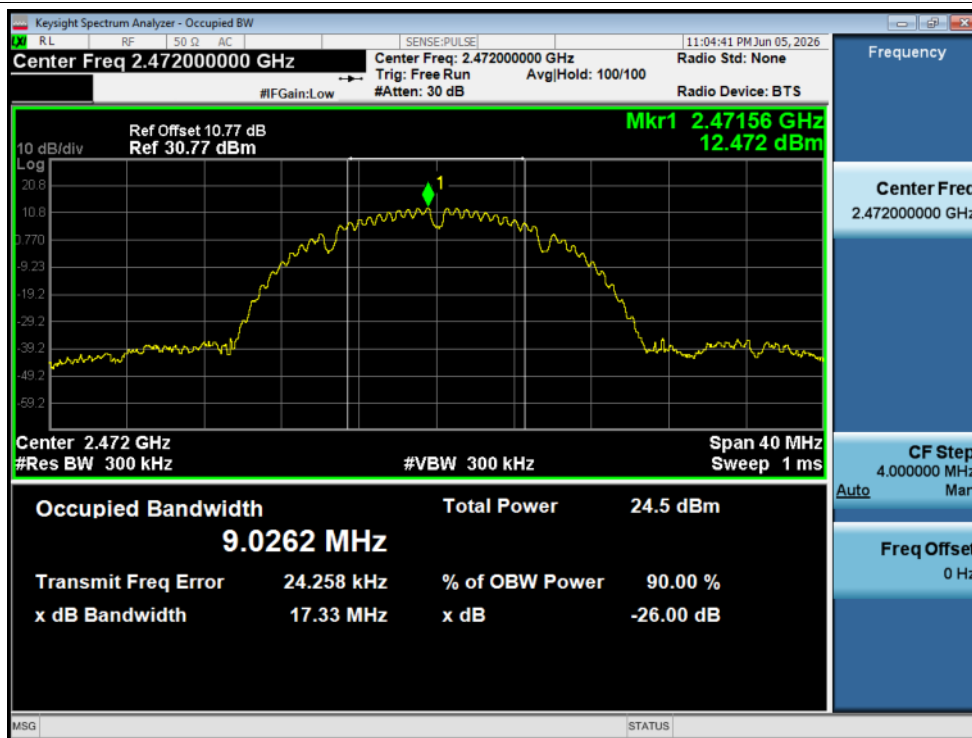


Spreading Bandwidth NVNT b 2472MHz Ant1

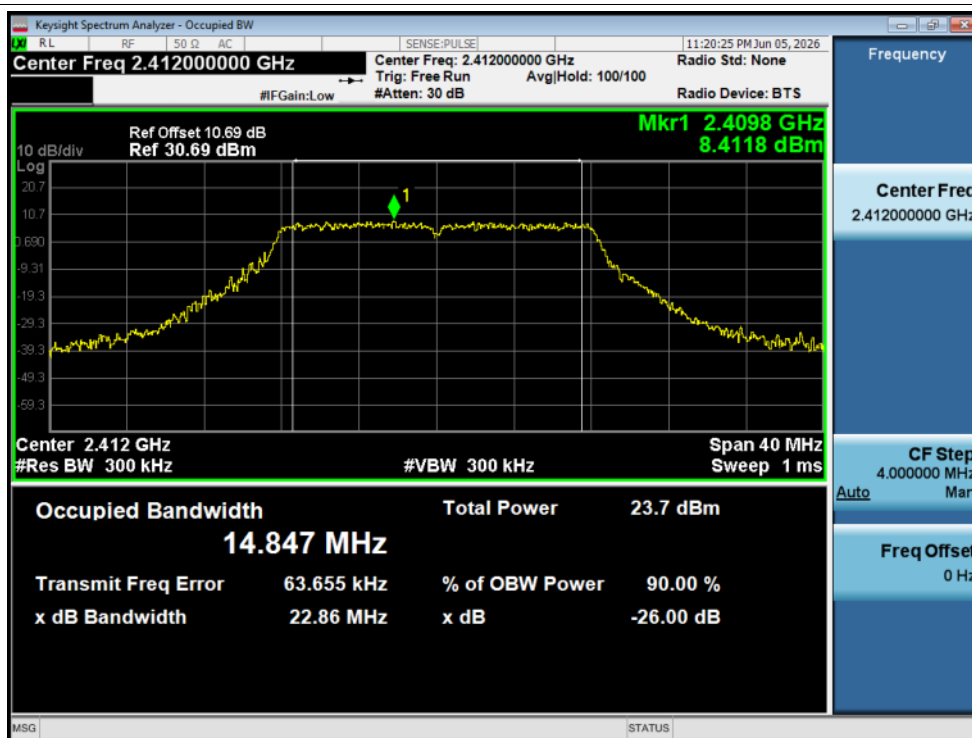


Spreading Bandwidth NVNT g 2412MHz Ant1

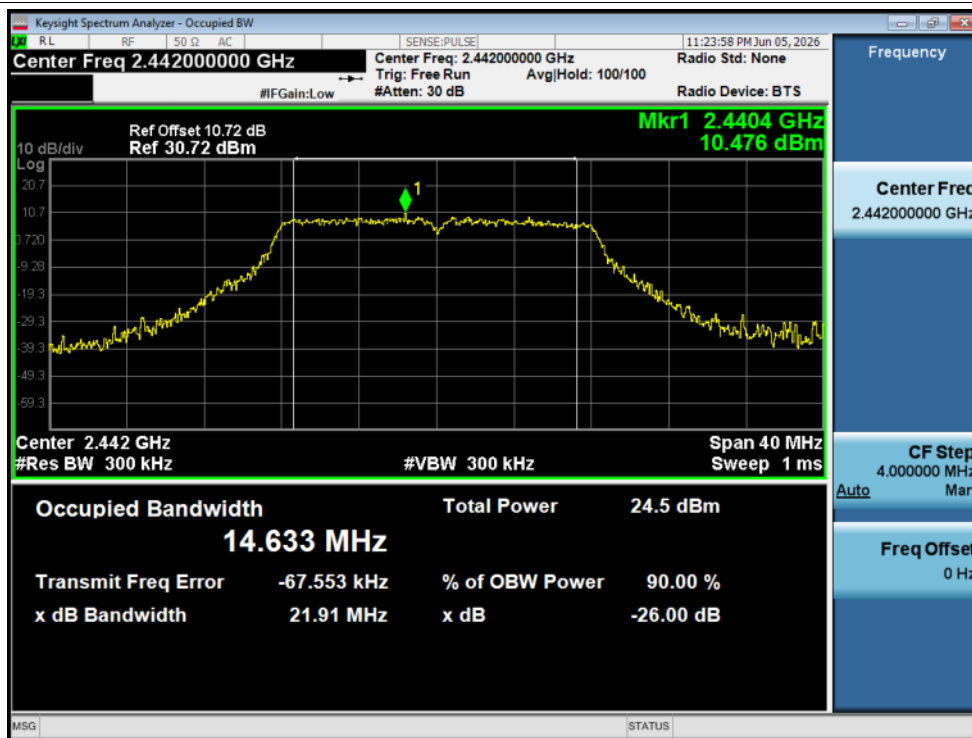


Spreading Bandwidth NVNT g 2442MHz Ant1

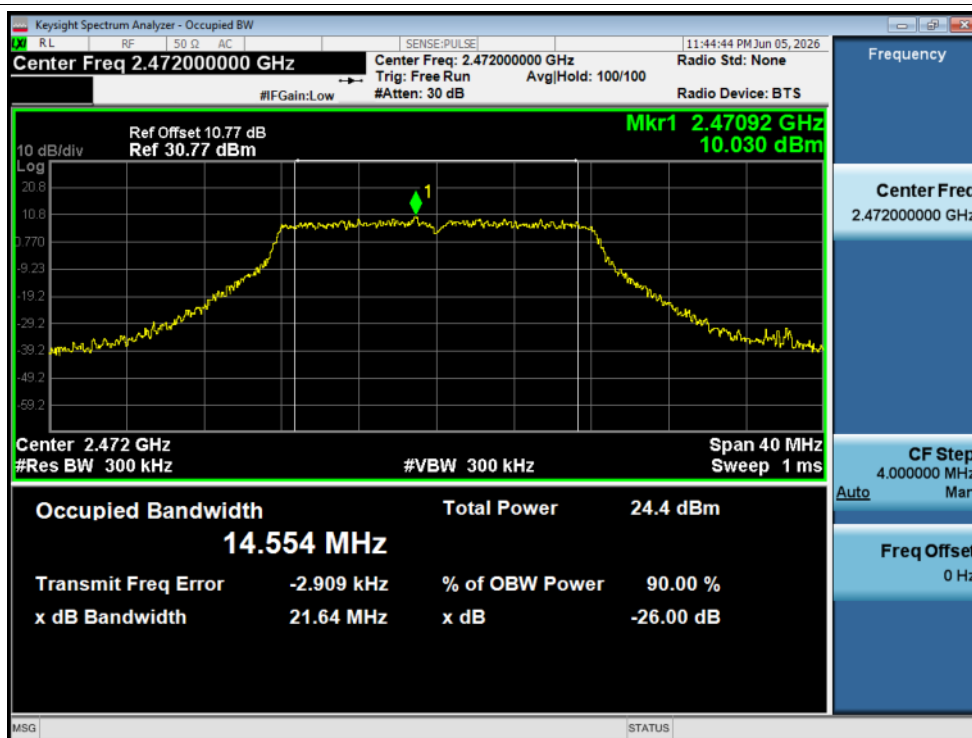


Spreading Bandwidth NVNT g 2472MHz Ant1

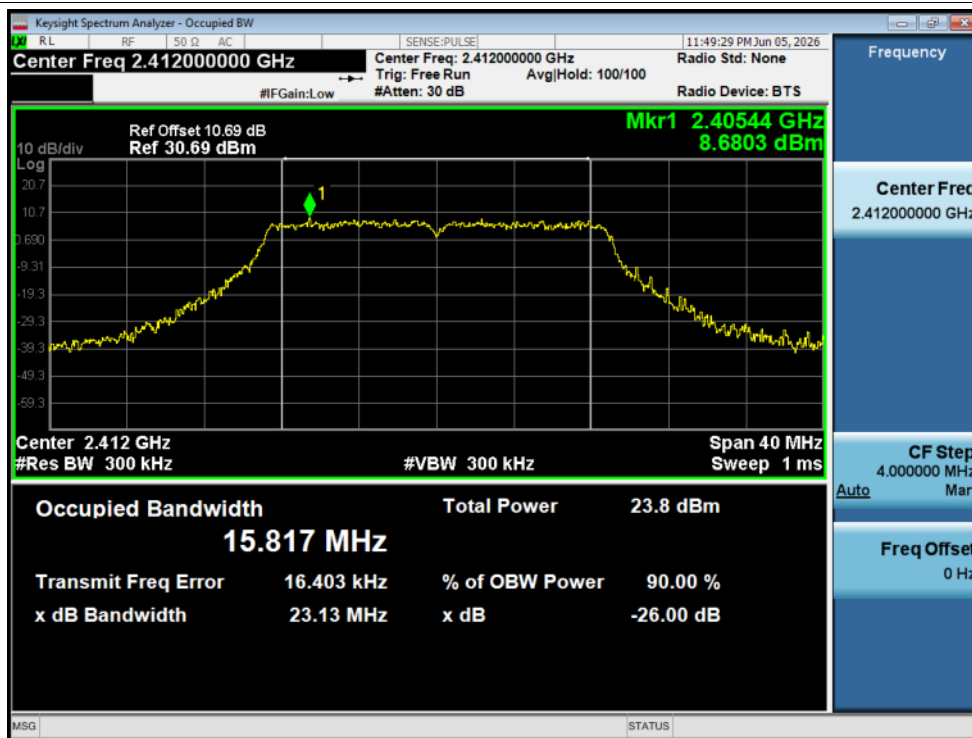

Spreading Bandwidth NVNT n20 2412MHz Ant1

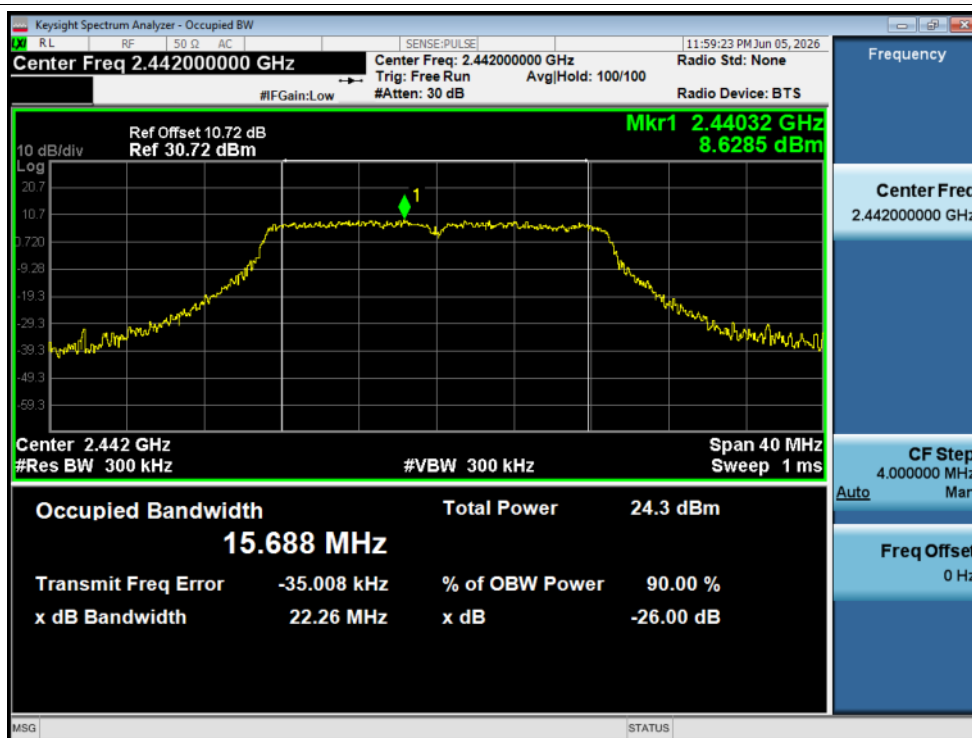

Spreading Bandwidth NVNT n20 2442MHz Ant1

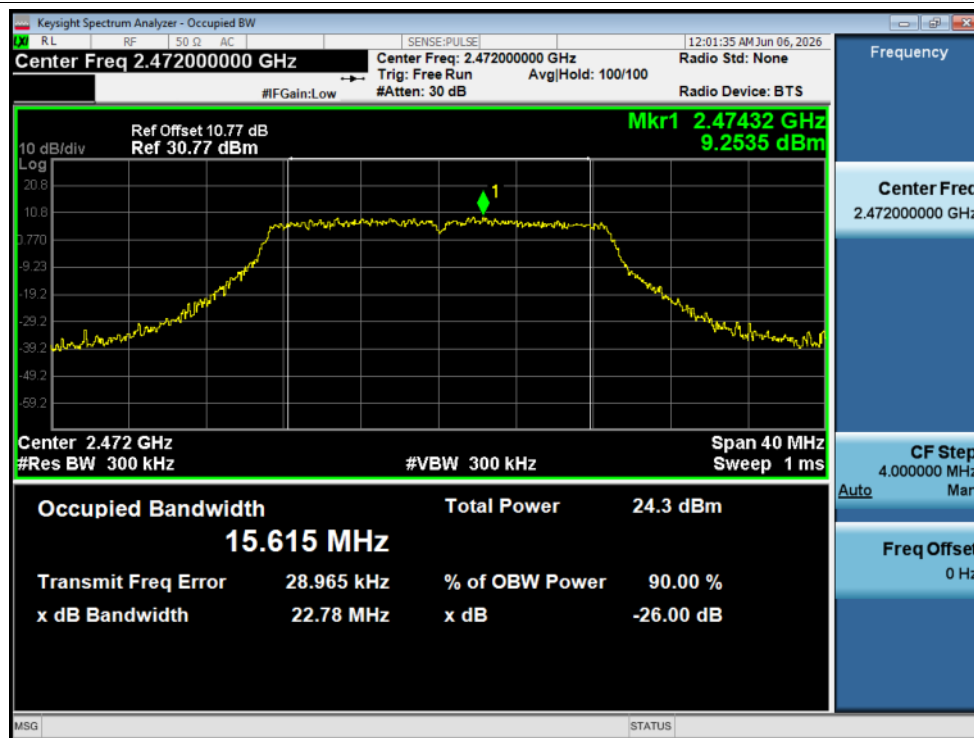


Spreading Bandwidth NVNT n20 2472MHz Ant1


Tx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (uW)	Max RMS Value (uW)	Limit Start(uW)	Limit Stop (uW)	Verdict
NVNT	b	2412	Ant1	30-1000	100.03	-57.39	NA	0.0018	NA	0.25	0.25	Pass
NVNT	b	2412	Ant1	1000-2387	2387.00	-42.46	NA	0.0568	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2399.94	-26.80	NA	2.0893	NA	25	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2493.04	-40.51	NA	0.0889	NA	25	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	2510.15	-40.88	NA	0.0817	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	30-1000	100.03	-57.09	NA	0.002	NA	0.25	0.25	Pass
NVNT	b	2442	Ant1	1000-2387	2341.92	-42.77	NA	0.0528	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	2387-2400	2398.85	-41.45	NA	0.0716	NA	25	25	Pass
NVNT	b	2442	Ant1	2483.5-2496.5	2483.86	-40.69	NA	0.0853	NA	25	25	Pass
NVNT	b	2442	Ant1	2496.5-13000	2542.72	-41.36	NA	0.0731	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	30-1000	100.03	-56.73	NA	0.0021	NA	0.25	0.25	Pass
NVNT	b	2472	Ant1	1000-2387	2374.79	-42.49	NA	0.0564	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2389.06	-41.25	NA	0.075	NA	25	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2483.86	-26.14	NA	2.4322	NA	25	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	2497.55	-40.76	NA	0.0839	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	30-1000	757.60	-51.48	NA	0.0071	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	1000-2387	2387.00	-40.54	NA	0.0883	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2399.78	-9.28	-27.04	118.0321	1.977	25	25	Pass
NVNT	g	2412	Ant1	2483.5-2496.5	2490.85	-41.61	NA	0.069	NA	25	25	Pass
NVNT	g	2412	Ant1	2496.5-13000	2505.95	-42.01	NA	0.063	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	30-1000	808.72	-50.88	NA	0.0082	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	1000-2387	2384.50	-43.28	NA	0.047	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	2387-2400	2399.38	-40.66	NA	0.0859	NA	25	25	Pass
NVNT	g	2442	Ant1	2483.5-2496.5	2494.53	-40.96	NA	0.0802	NA	25	25	Pass
NVNT	g	2442	Ant1	2496.5-13000	2520.66	-41.25	NA	0.075	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	30-1000	756.43	-50.70	NA	0.0085	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	1000-2387	2368.14	-44.13	NA	0.0386	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	2387-2400	2393.01	-42.24	NA	0.0597	NA	25	25	Pass
NVNT	g	2472	Ant1	2483.5-2496.5	2483.56	-7.82	-25	165.1962	3.1623	25	25	Pass
NVNT	g	2472	Ant1	2496.5-13000	2500.70	-33.21	NA	0.4775	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	764.97	-51.13	NA	0.0077	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	1000-2387	2386.72	-39.29	NA	0.1178	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	2387-2400	2400.00	-9.38	-25.26	115.3453	2.9785	25	25	Pass
NVNT	n20	2412	Ant1	2483.5-2496.5	2488.48	-41.65	NA	0.0684	NA	25	25	Pass
NVNT	n20	2412	Ant1	2496.5-13000	2515.41	-41.51	NA	0.0706	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	30-1000	828.21	-50.62	NA	0.0087	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	1000-2387	2339.70	-43.82	NA	0.0415	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	2387-2400	2398.15	-40.38	NA	0.0916	NA	25	25	Pass


NVNT	n20	2442	Ant1	2483.5-2496.5	2491.17	-41.80	NA	0.0661	NA	25	25	Pass
NVNT	n20	2442	Ant1	2496.5-13000	2544.82	-42.48	NA	0.0565	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	30-1000	910.47	-50.88	NA	0.0082	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	1000-2387	2364.53	-44.31	NA	0.0371	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2398.63	-42.50	NA	0.0562	NA	25	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2483.56	-7.58	-23.43	174.5822	4.5394	25	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	2498.60	-31.14	NA	0.7691	NA	2.5	2.5	Pass

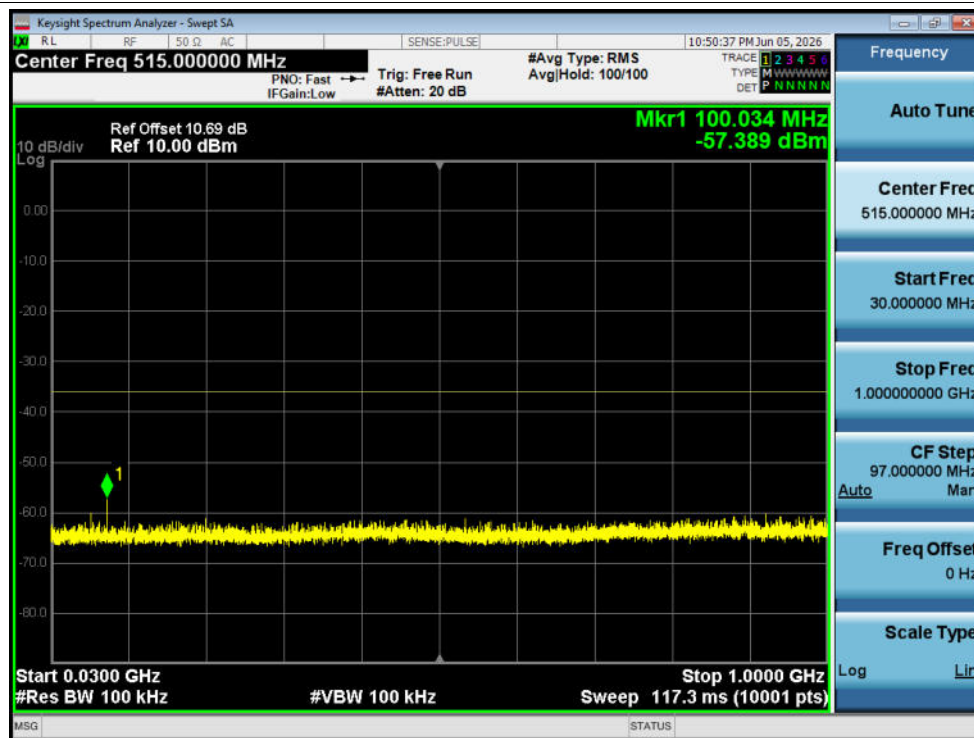


Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

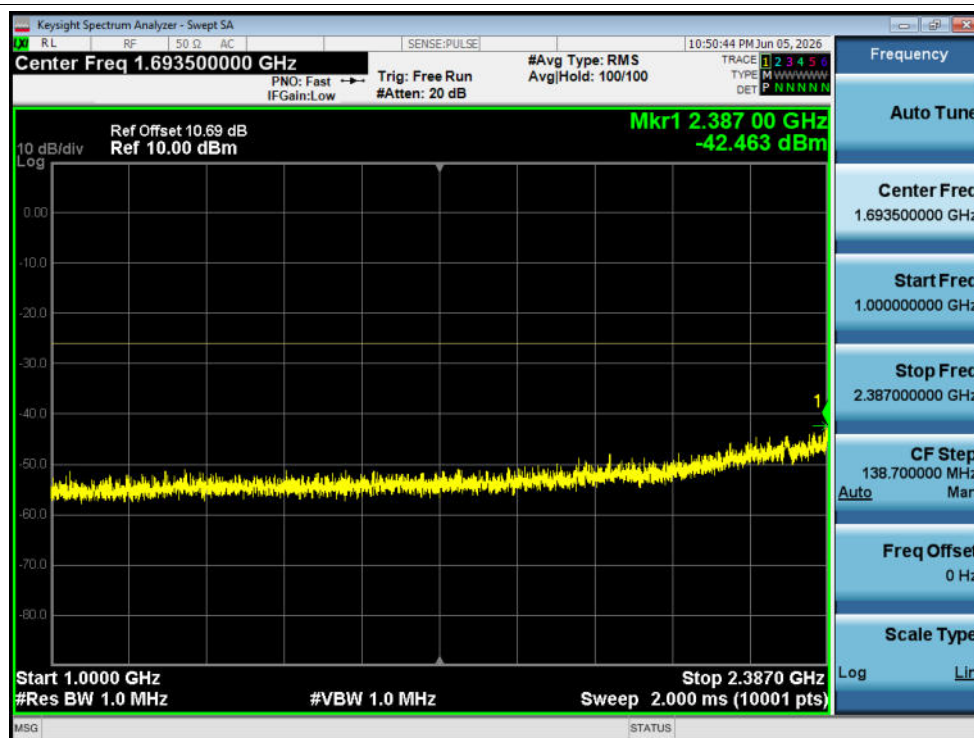


Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz

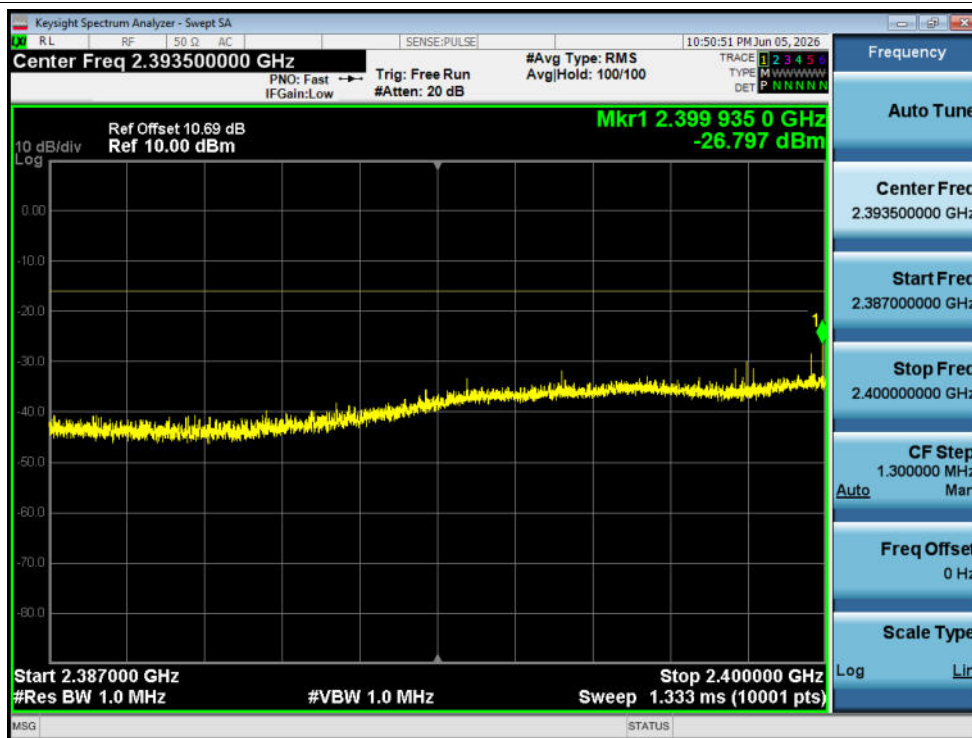


Tx. Spurious NVNT b 2412MHz Ant1 @ 2387MHz-2400MHz

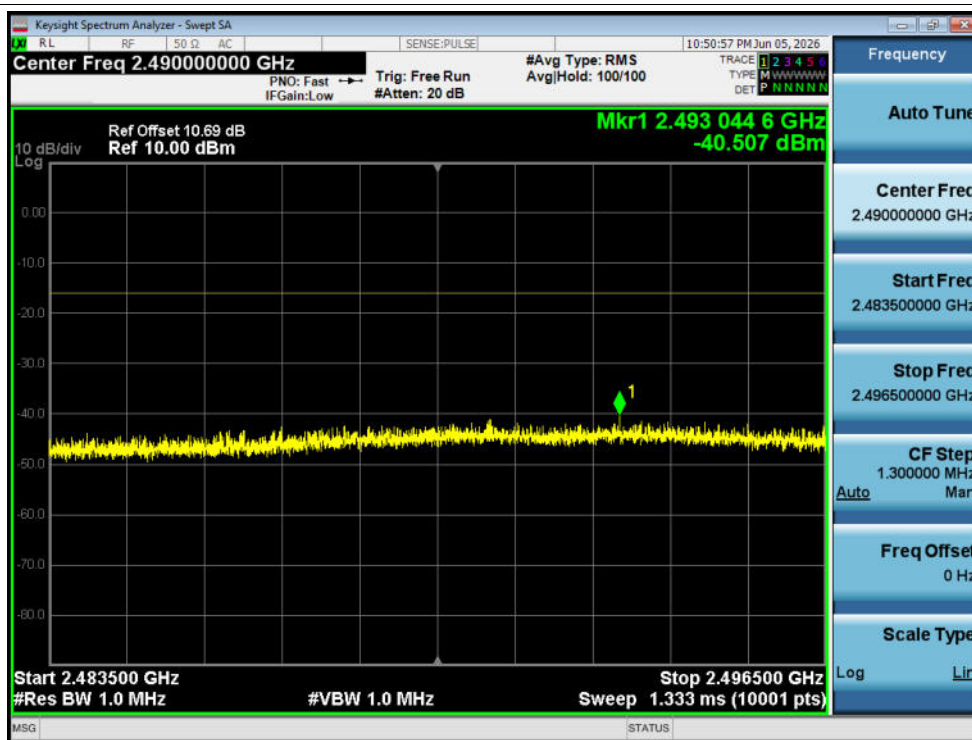


Tx. Spurious NVNT b 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

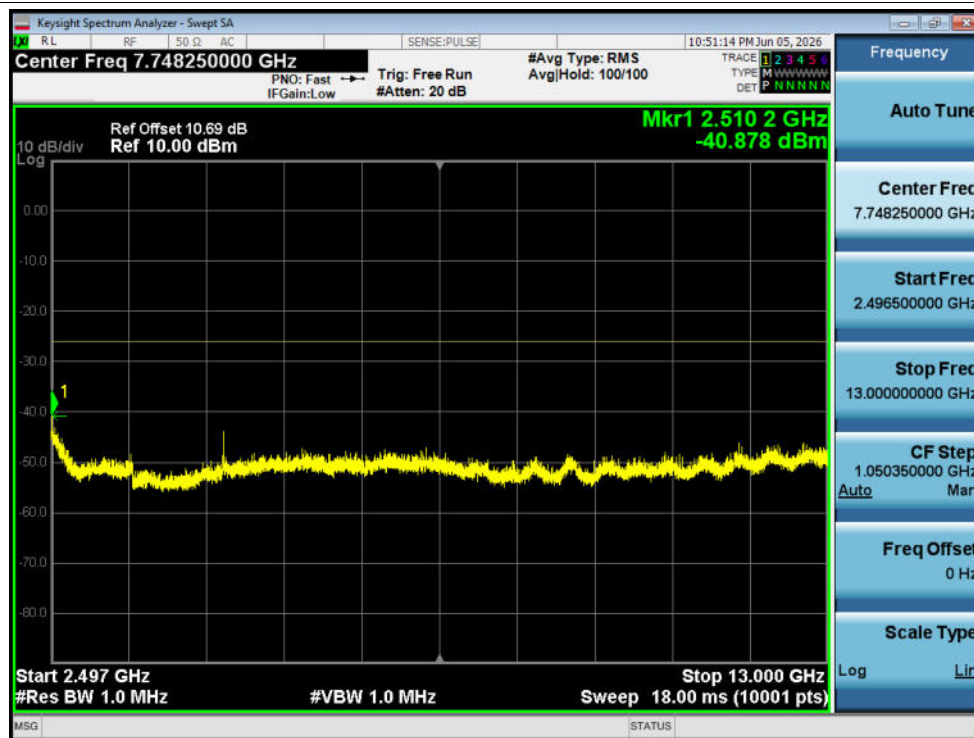


Tx. Spurious NVNT b 2412MHz Ant1 @ 2496.5MHz-13000MHz

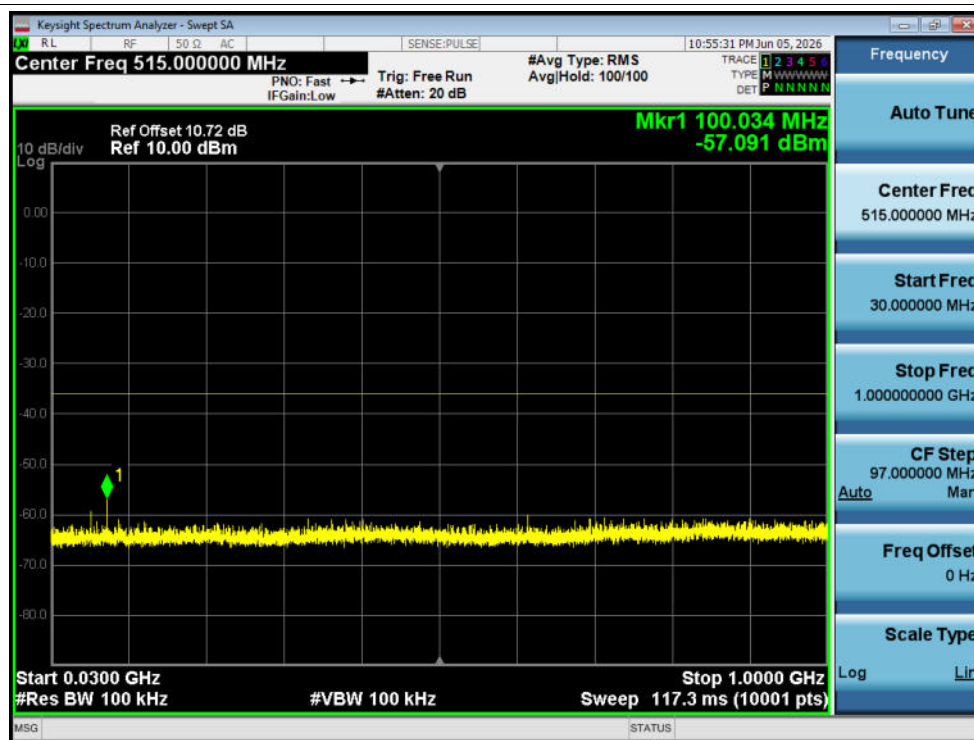


Tx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

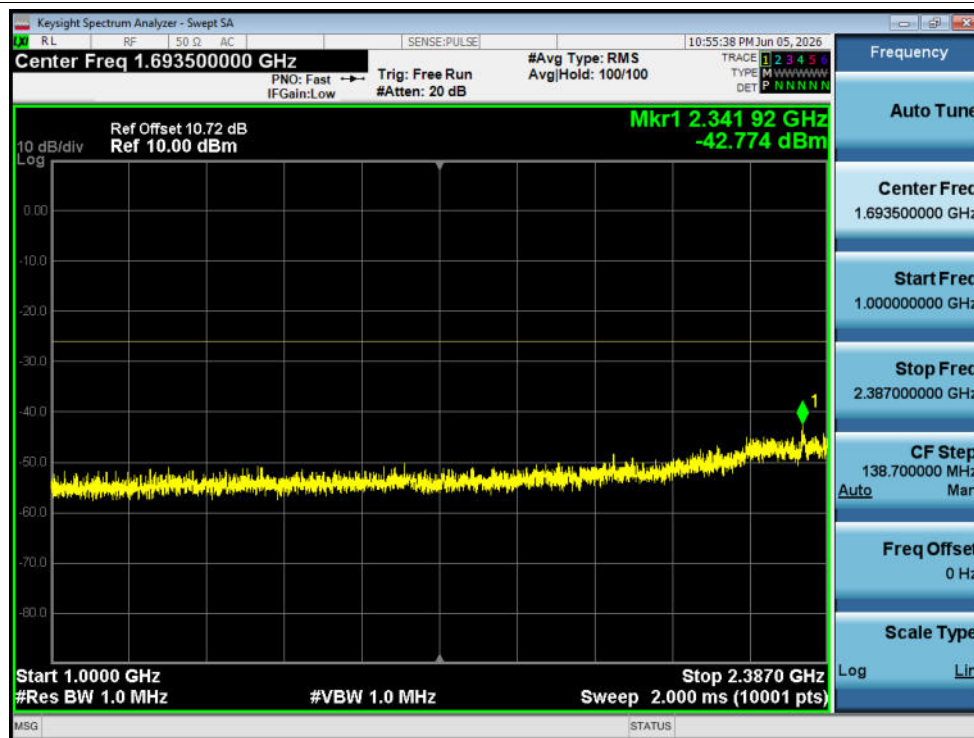


Tx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-2387MHz

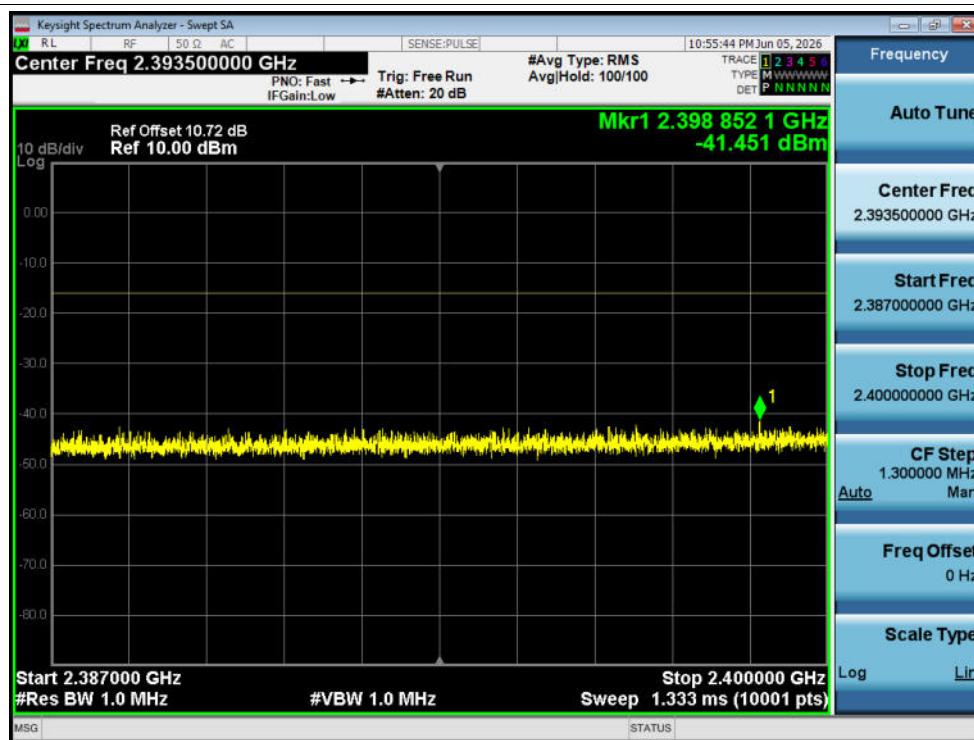


Tx. Spurious NVNT b 2442MHz Ant1 @ 2387MHz-2400MHz

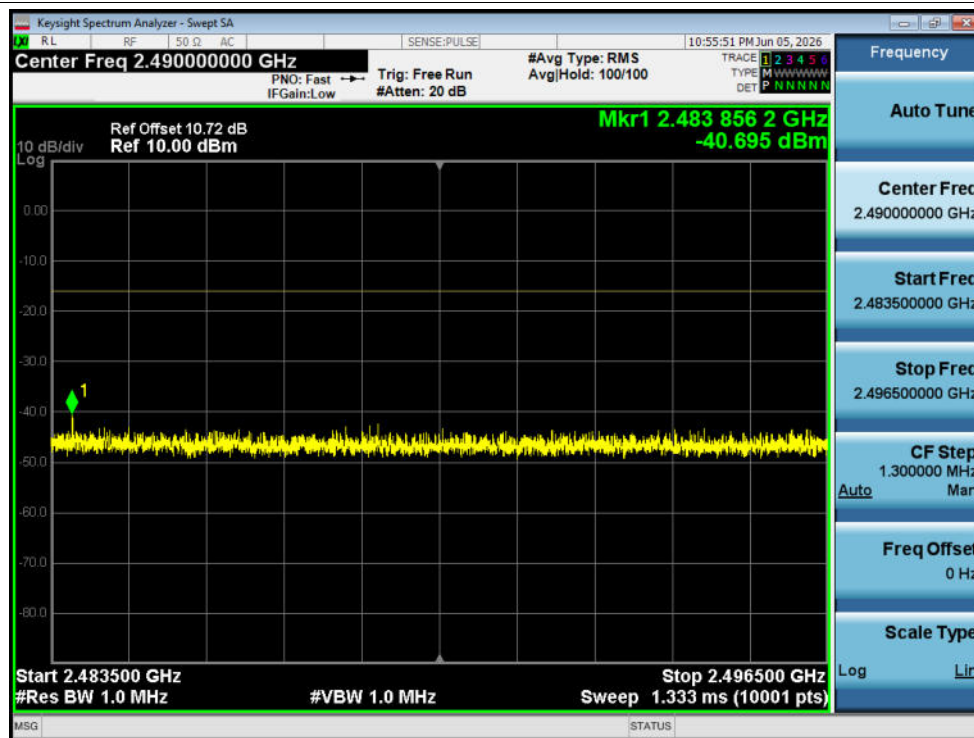


Tx. Spurious NVNT b 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

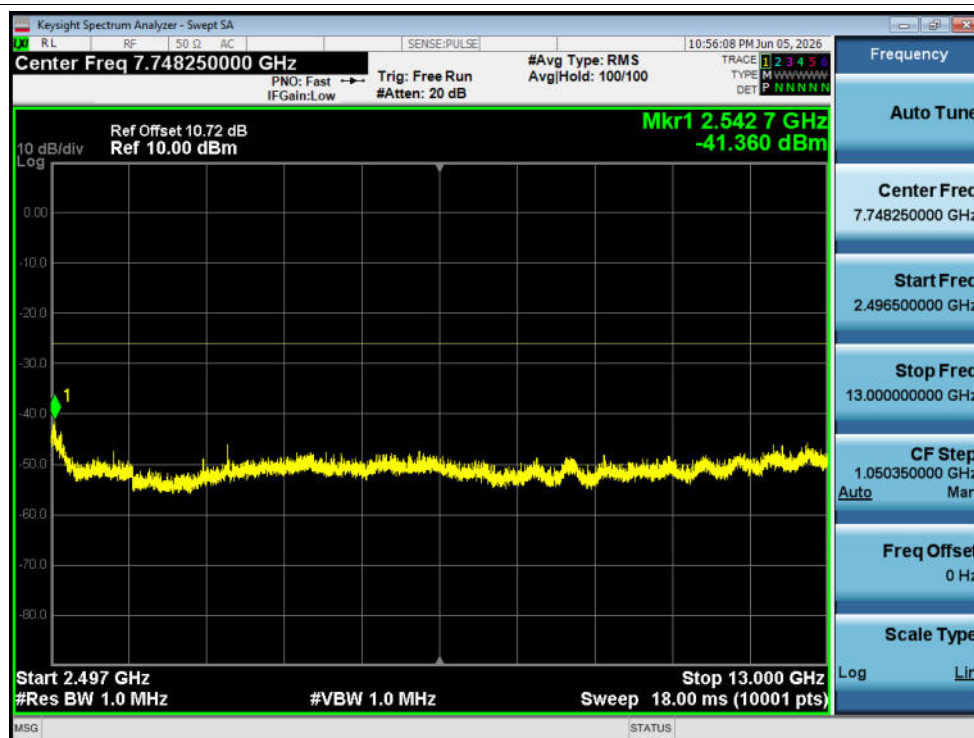


Tx. Spurious NVNT b 2442MHz Ant1 @ 2496.5MHz-13000MHz

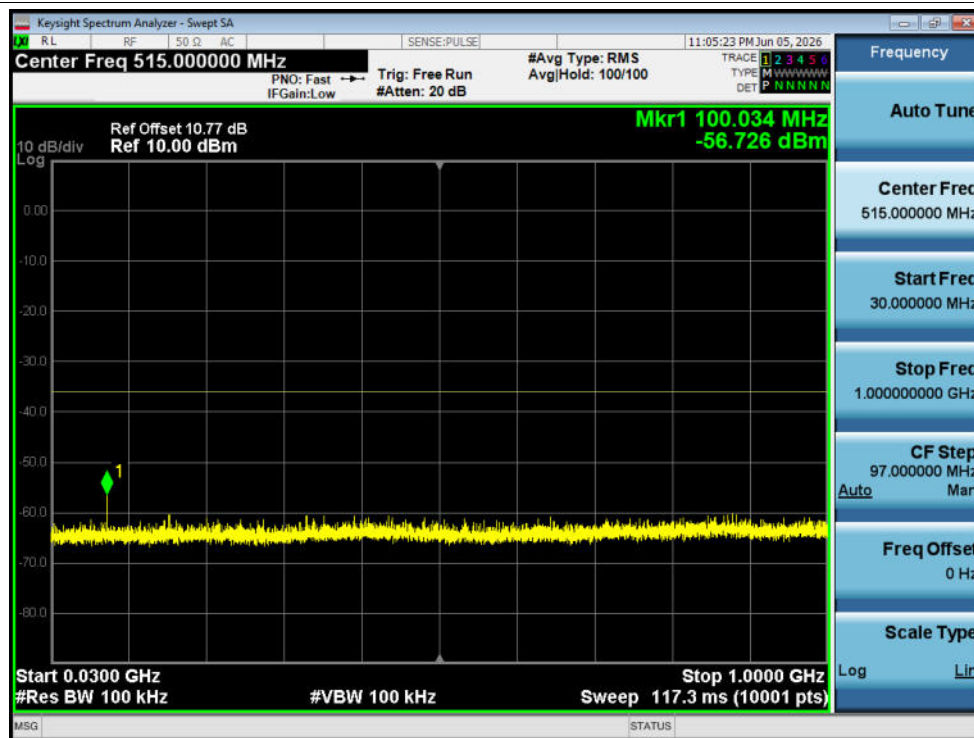


Tx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

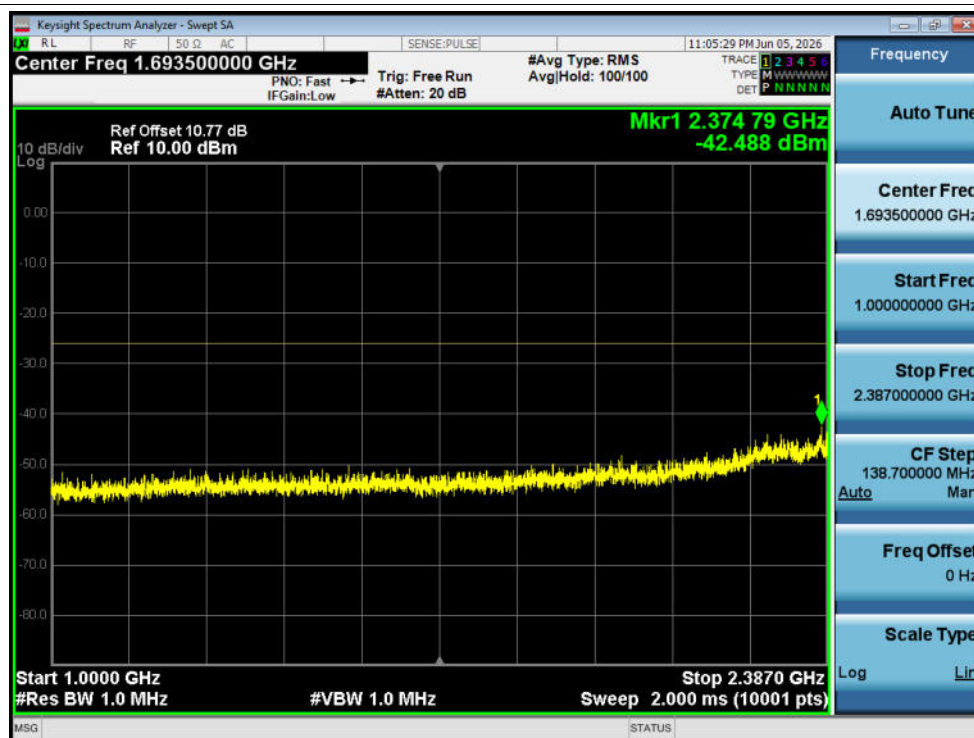

Tx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-2387MHz

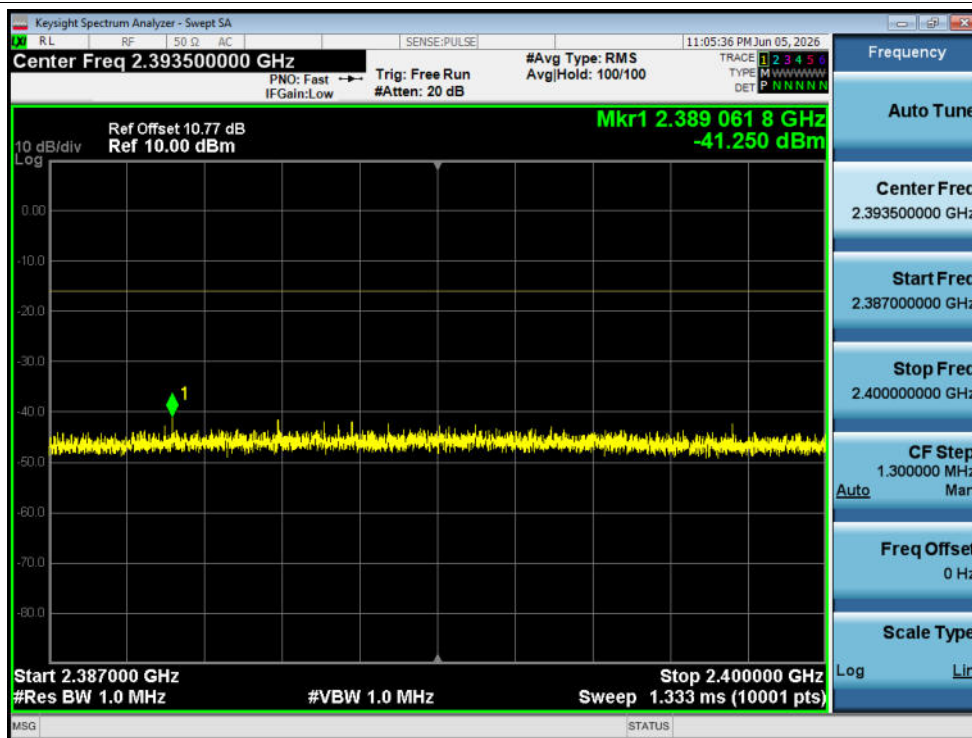


Tx. Spurious NVNT b 2472MHz Ant1 @ 2387MHz-2400MHz

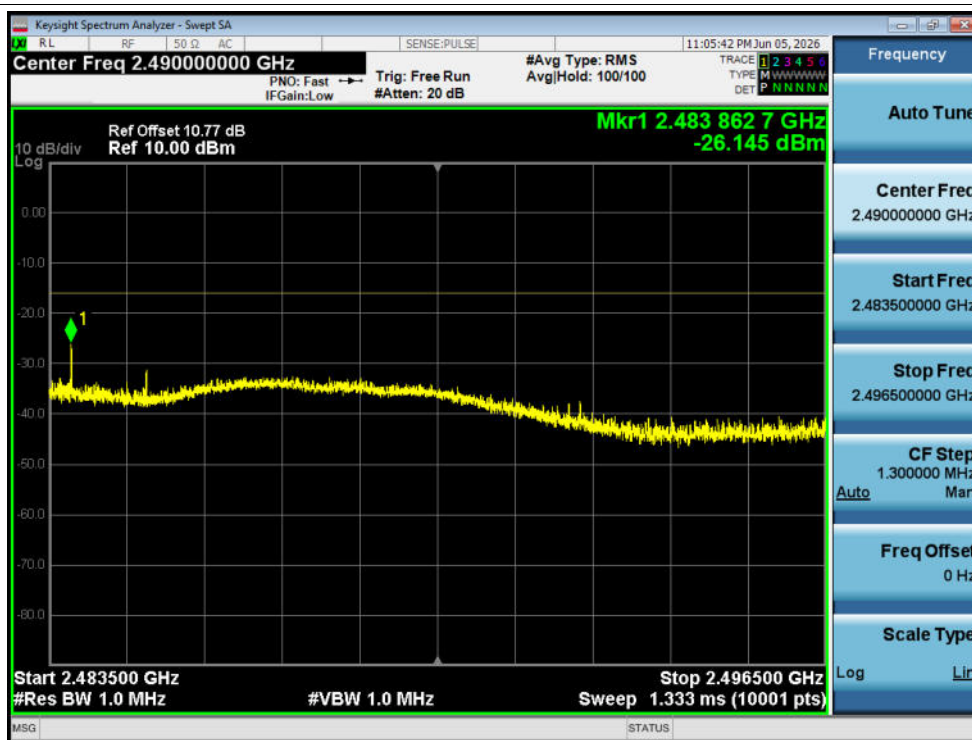


Tx. Spurious NVNT b 2472MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT b 2472MHz Ant1 @ 2496.5MHz-13000MHz

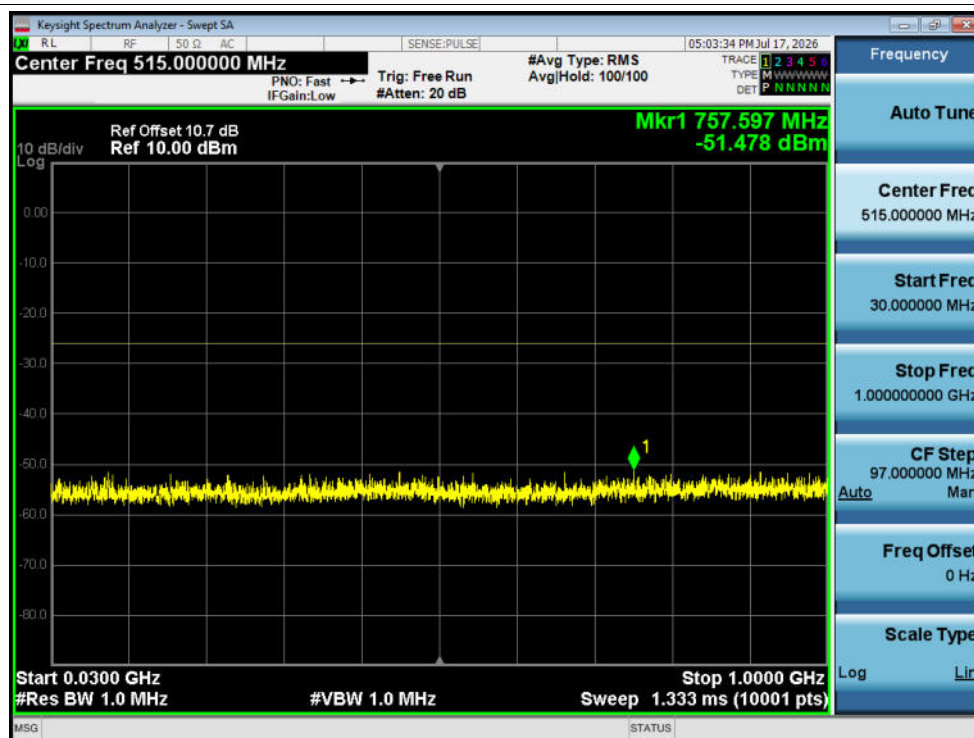

Tx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

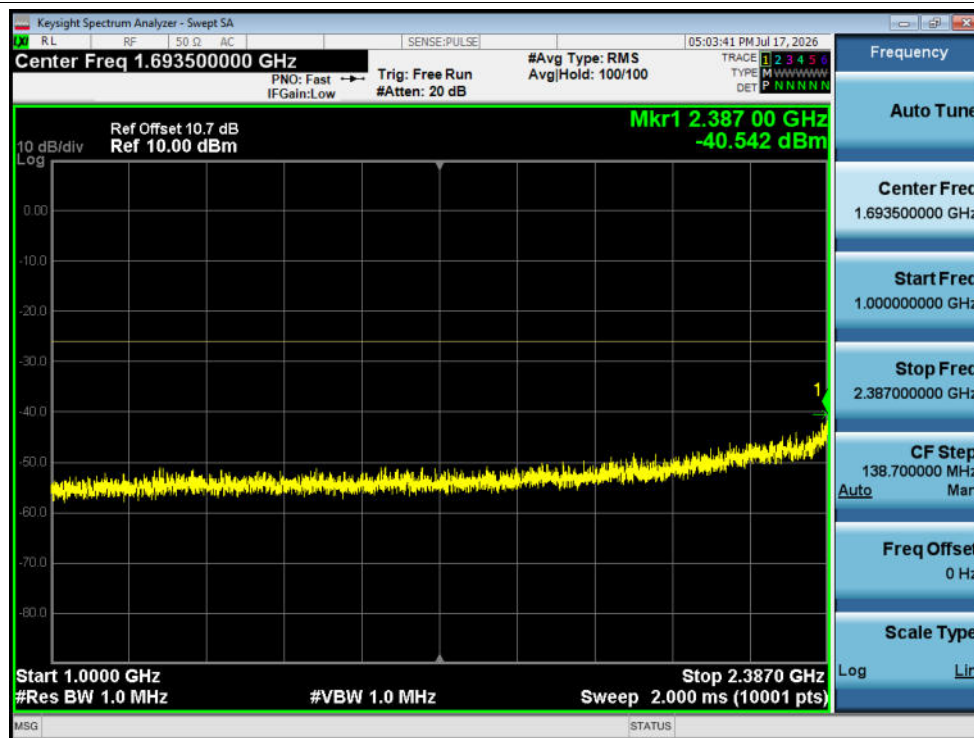


Tx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-2387MHz

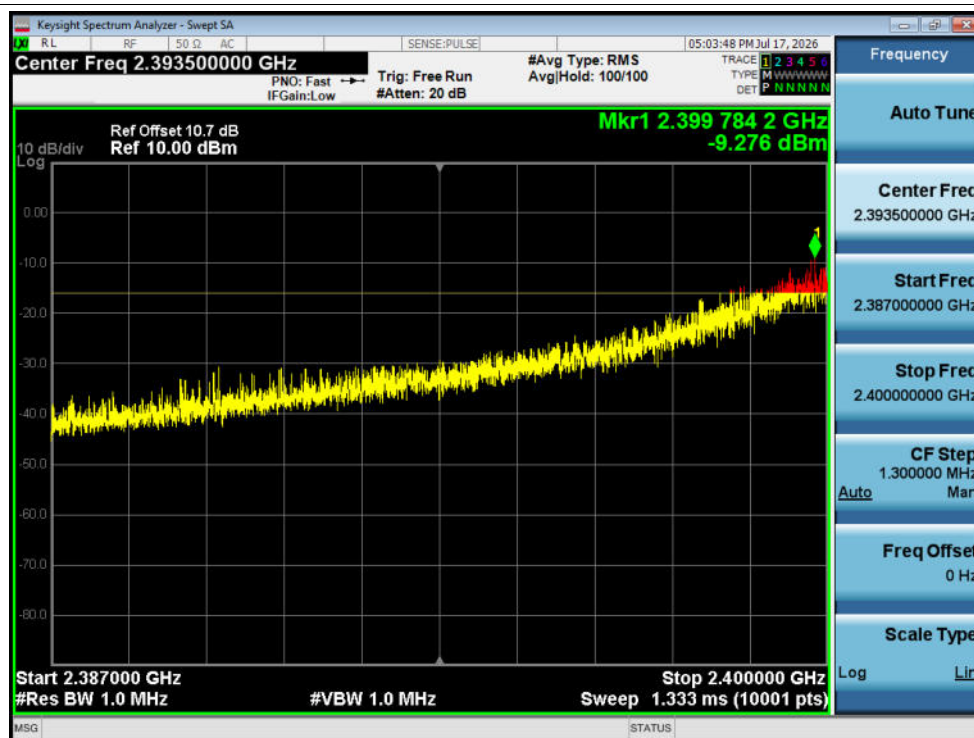


Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz




Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz Final

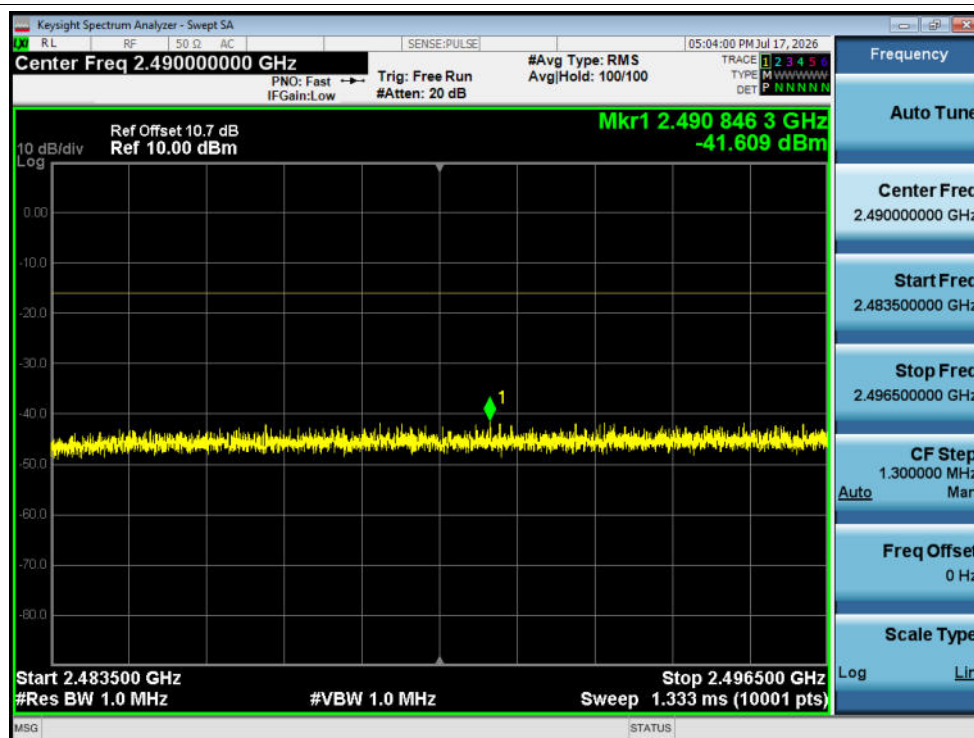


Tx. Spurious NVNT g 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

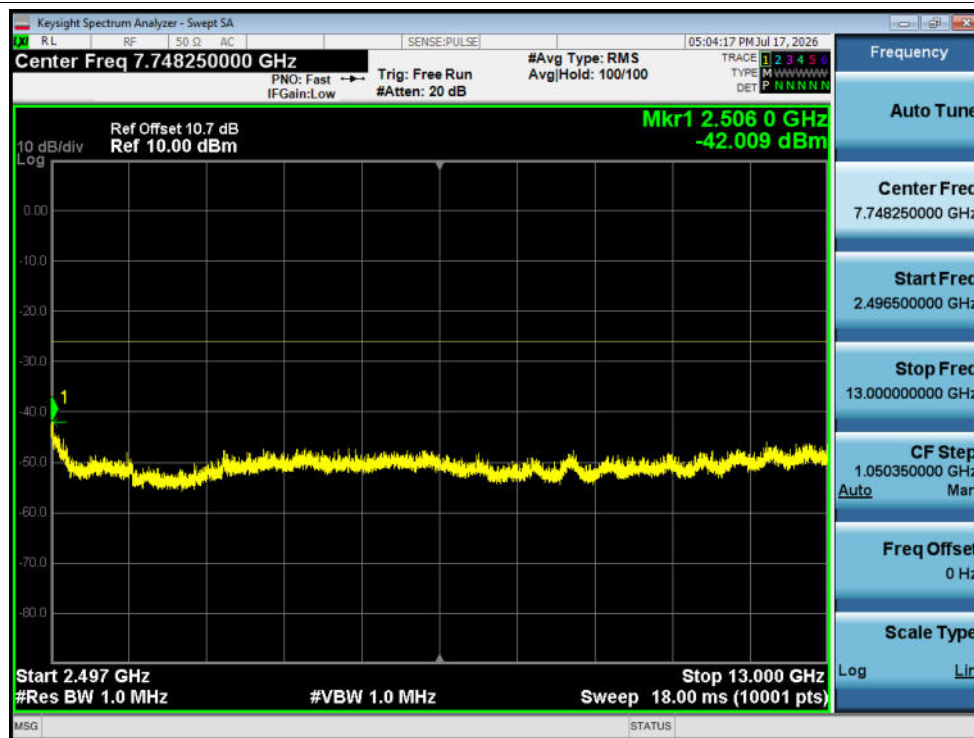


Tx. Spurious NVNT g 2412MHz Ant1 @ 2496.5MHz-13000MHz

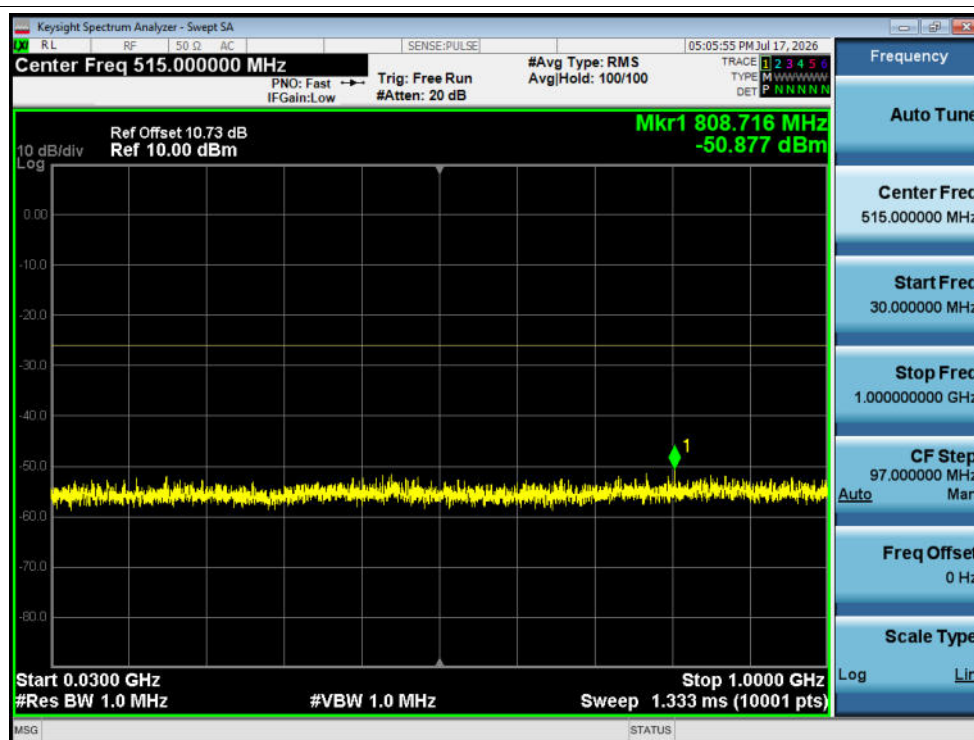


Tx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

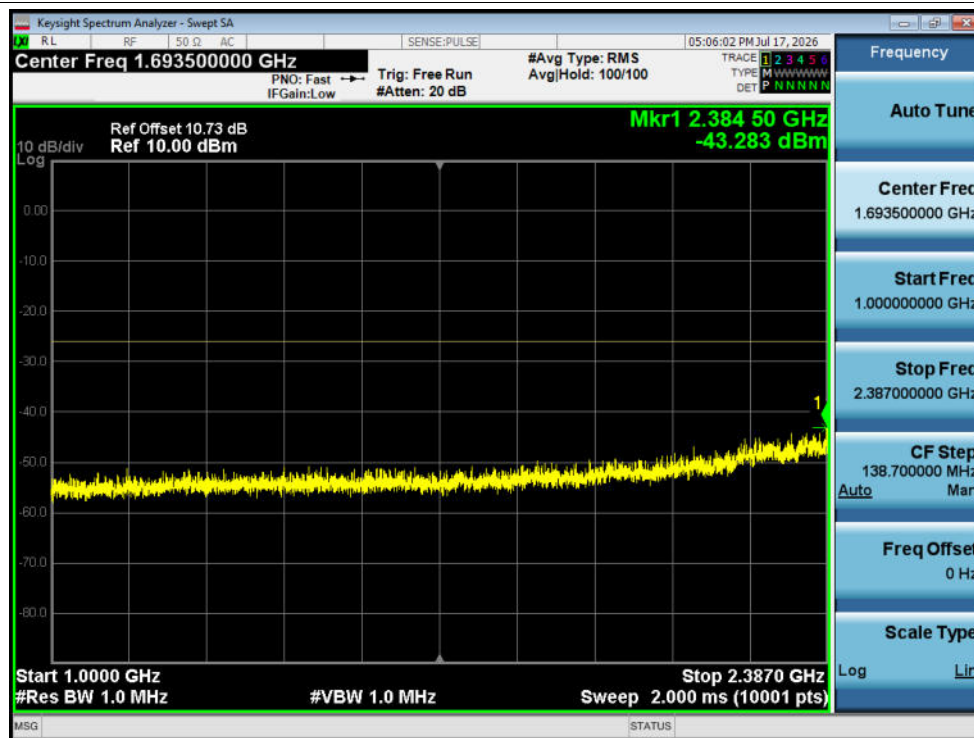


Tx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-2387MHz

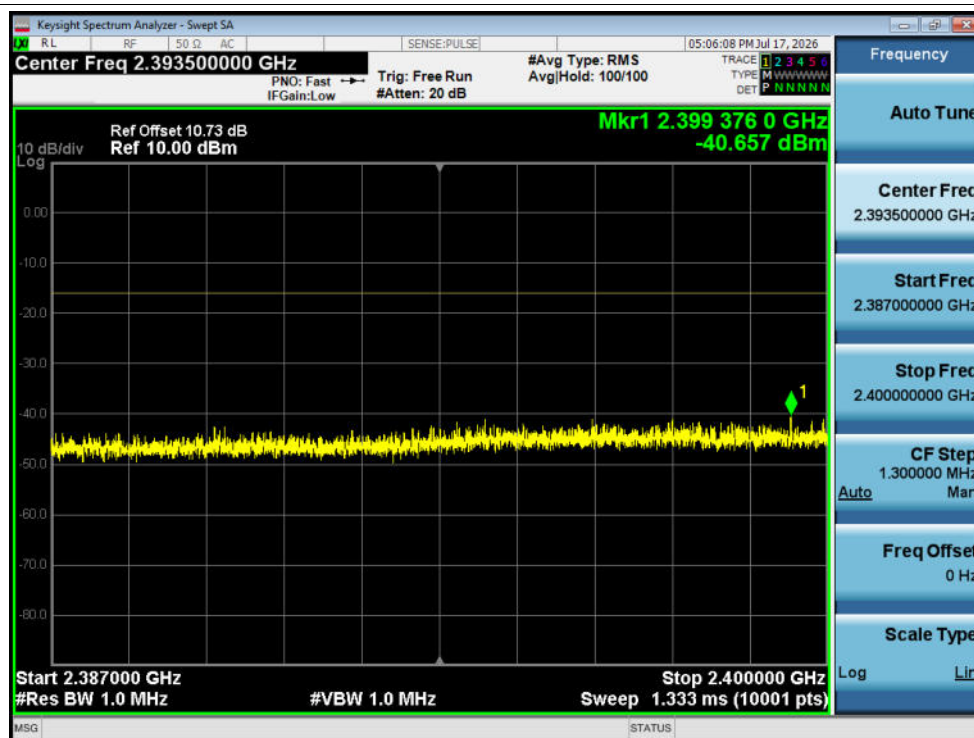

Tx. Spurious NVNT g 2442MHz Ant1 @ 2387MHz-2400MHz

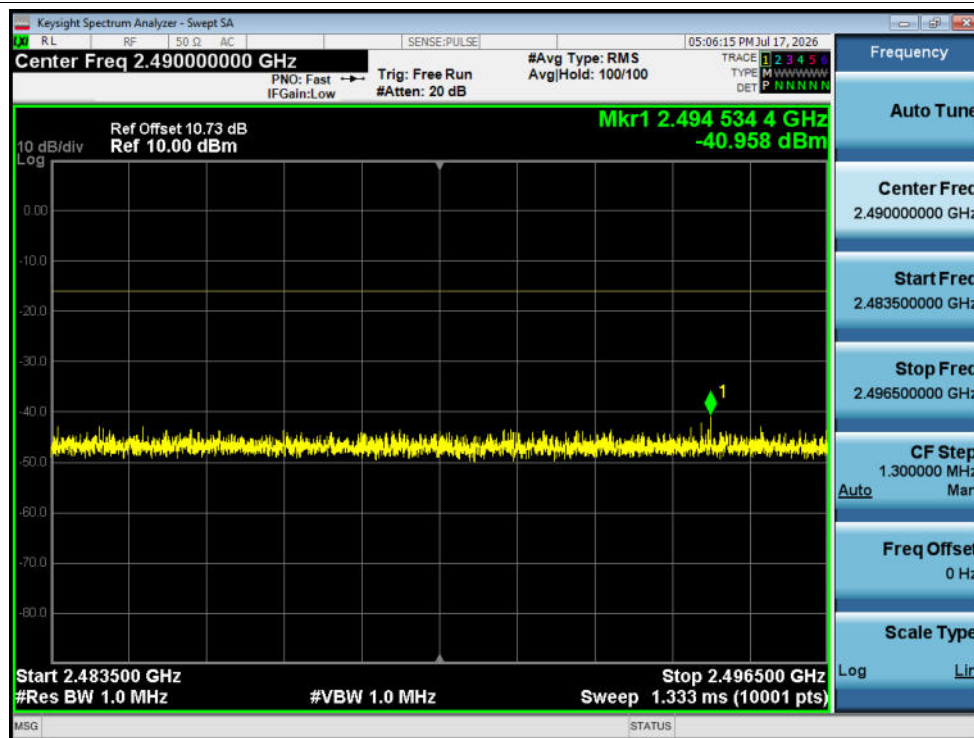


Tx. Spurious NVNT g 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

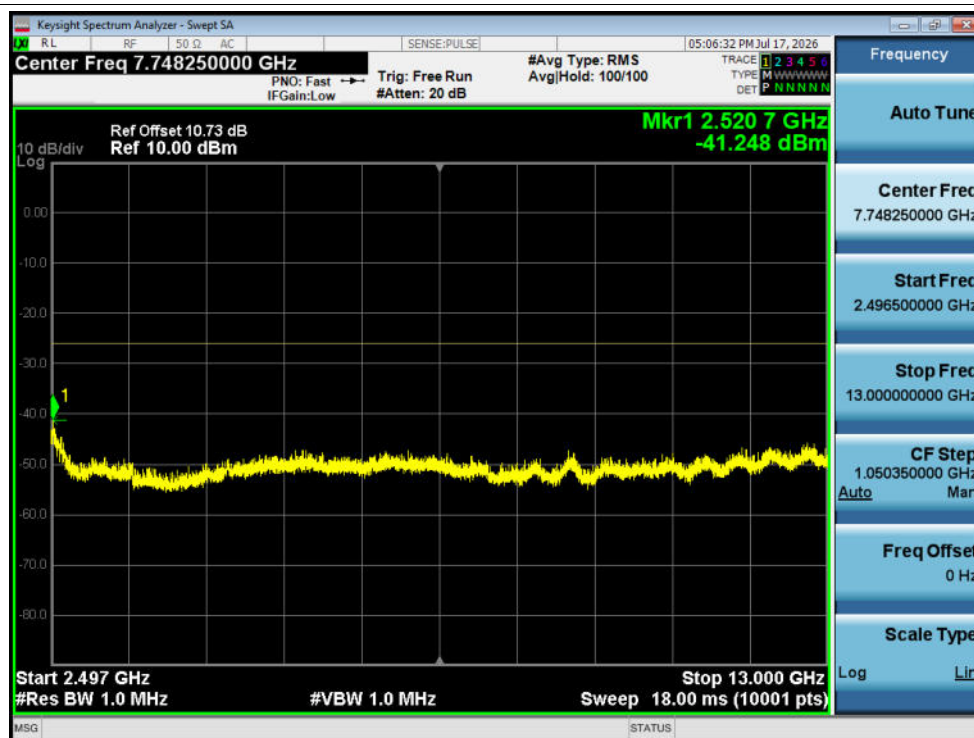


Tx. Spurious NVNT g 2442MHz Ant1 @ 2496.5MHz-13000MHz




Tx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

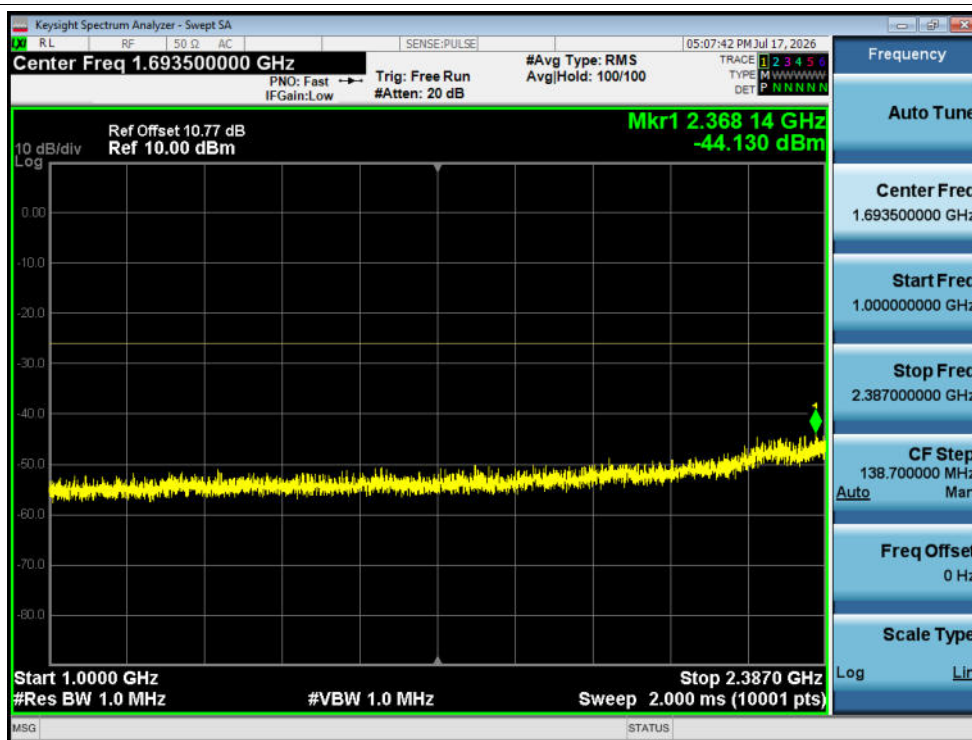


Tx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-2387MHz

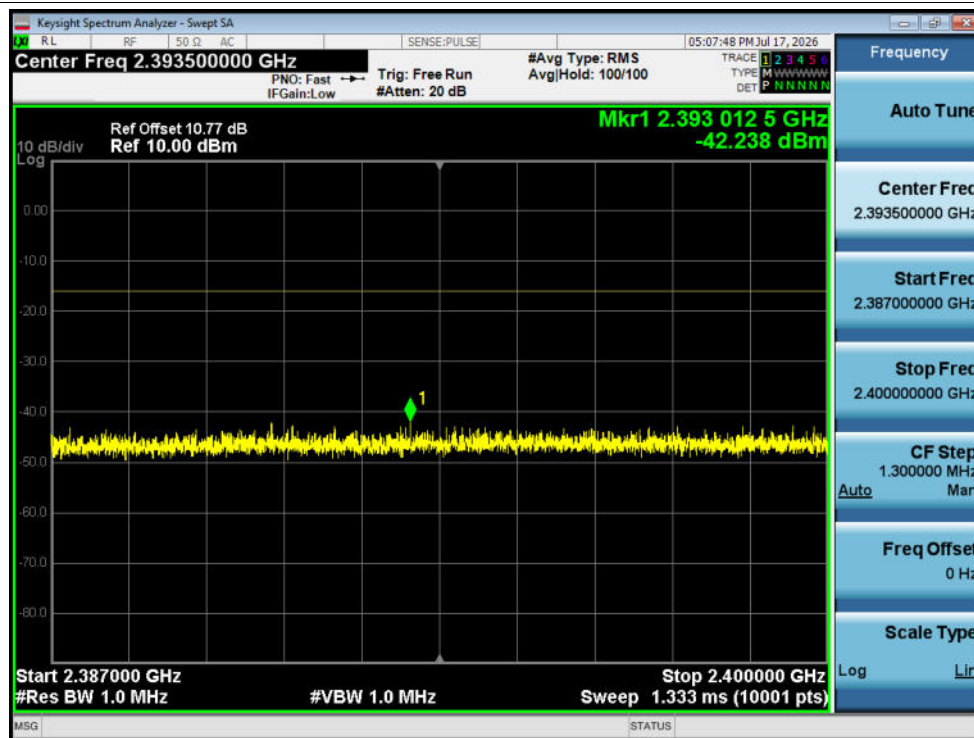


Tx. Spurious NVNT g 2472MHz Ant1 @ 2387MHz-2400MHz

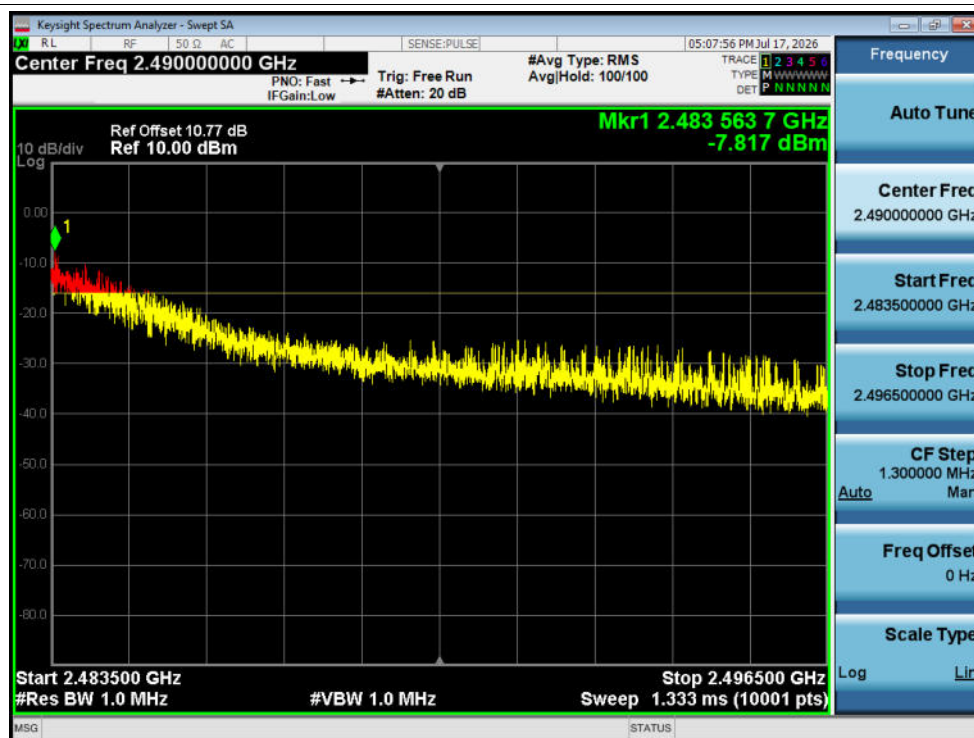


Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

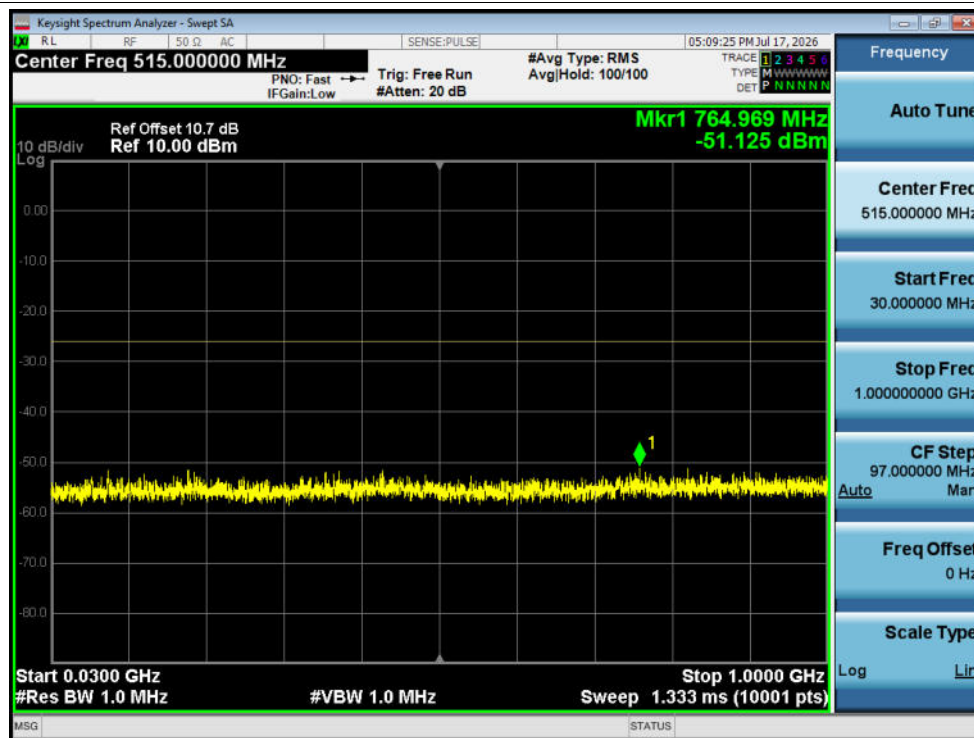


Tx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

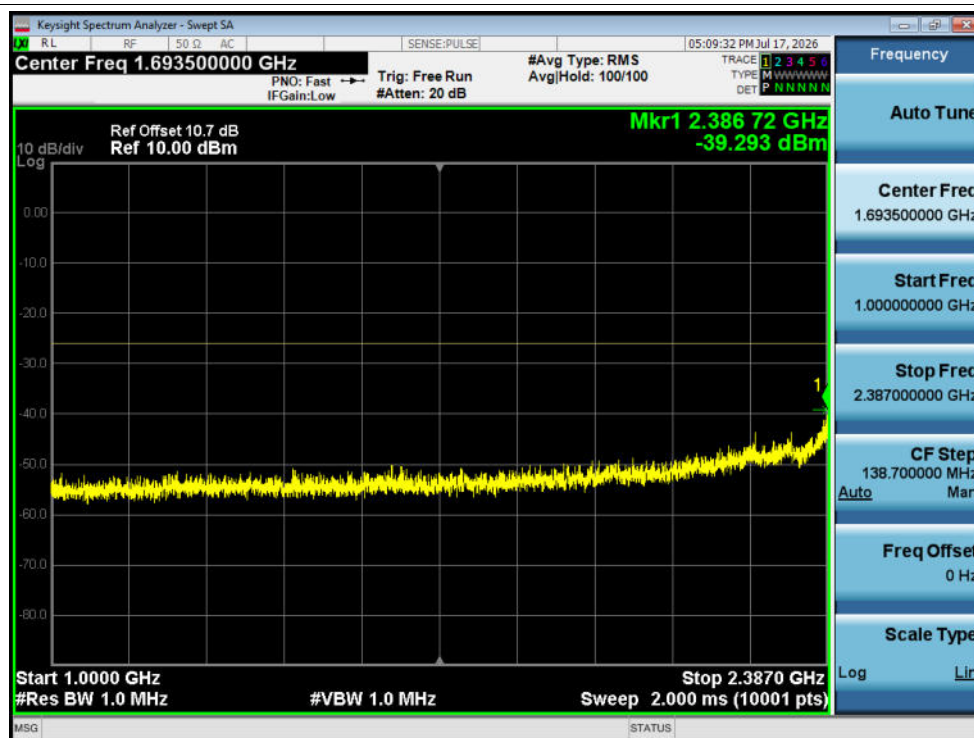


Tx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-2387MHz

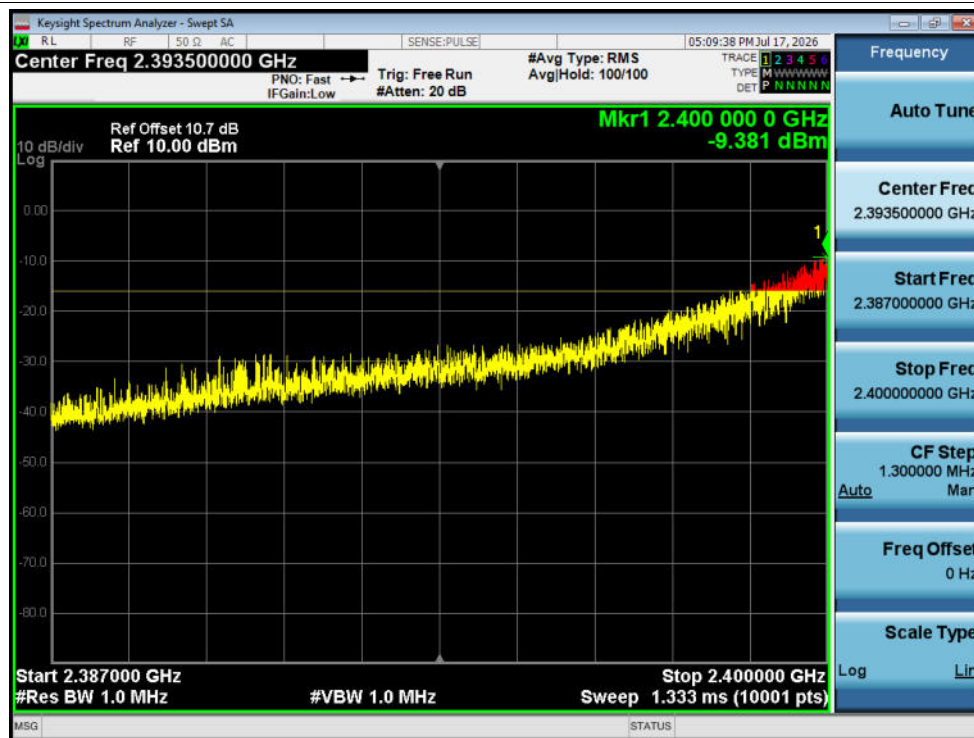

Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz

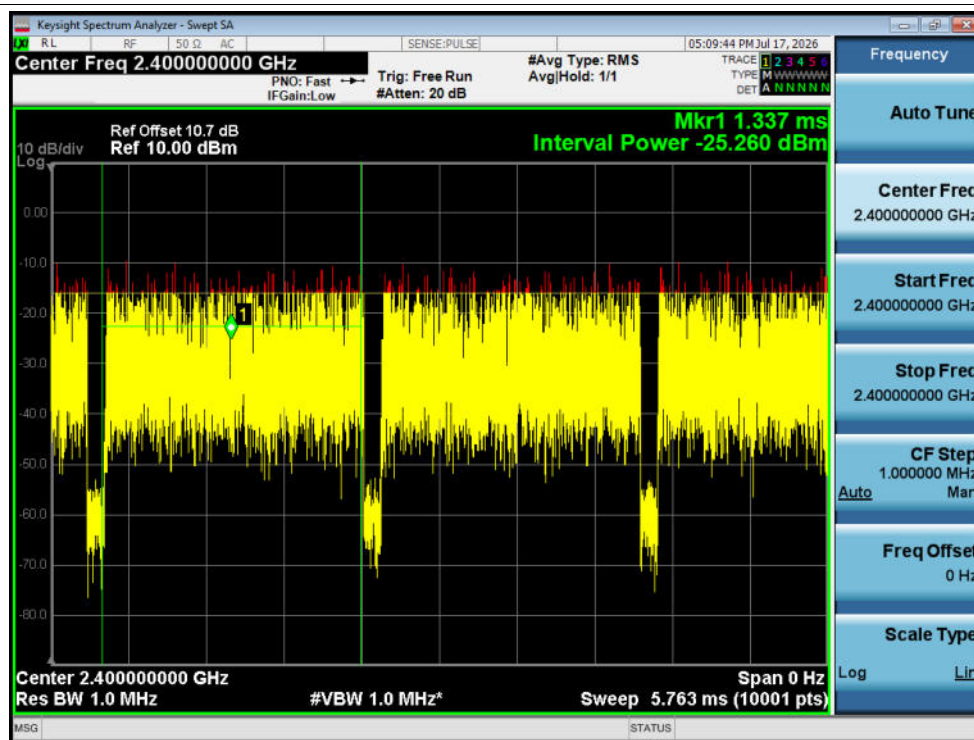


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz Final

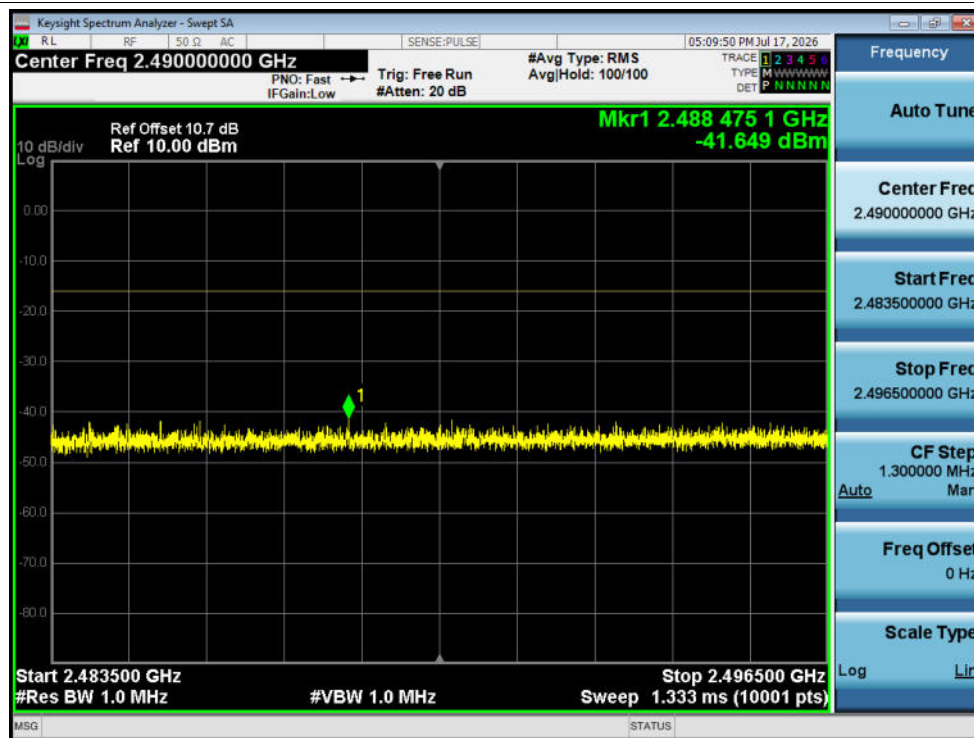


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT n20 2412MHz Ant1 @ 2496.5MHz-13000MHz

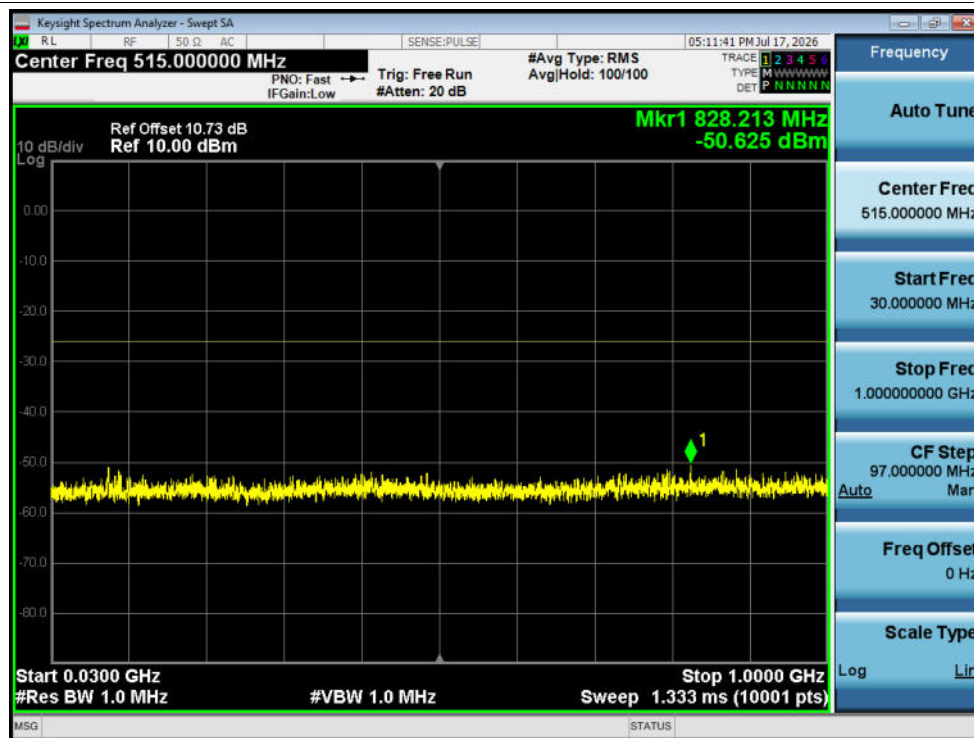


Tx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

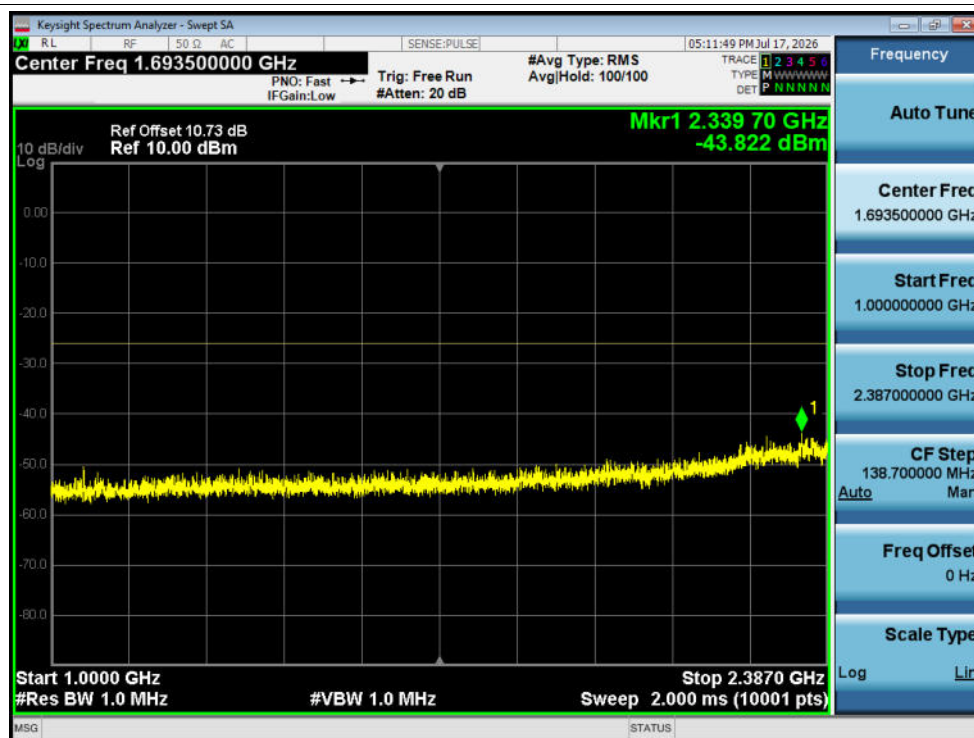

Tx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-2387MHz

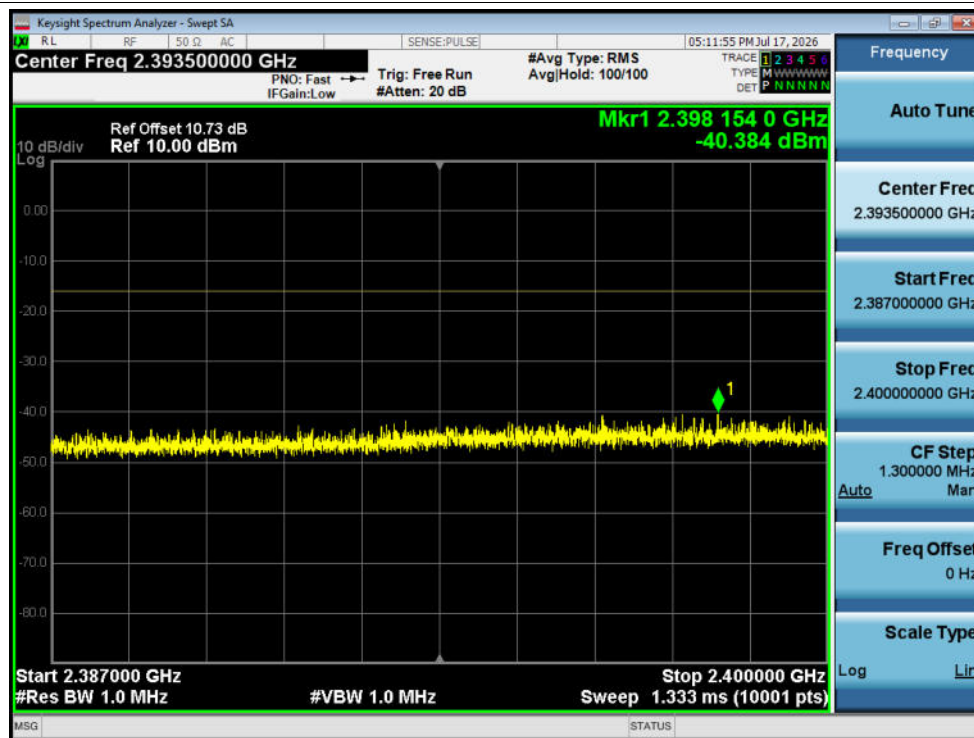


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2387MHz-2400MHz

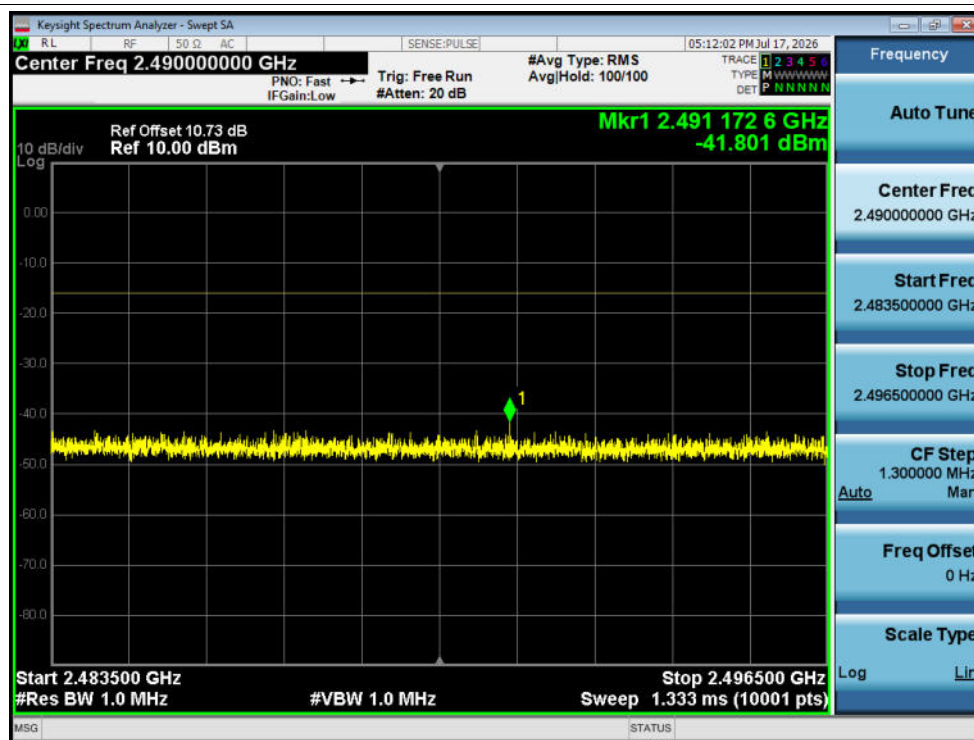

Tx. Spurious NVNT n20 2442MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT n20 2442MHz Ant1 @ 2496.5MHz-13000MHz

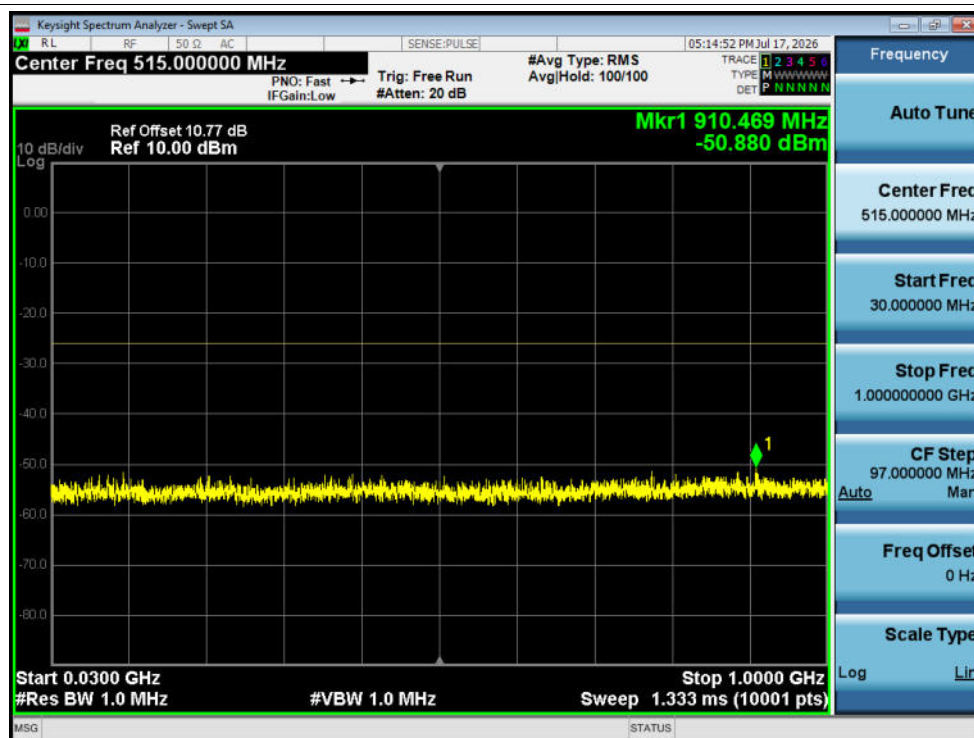


Tx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz




Tx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-2387MHz

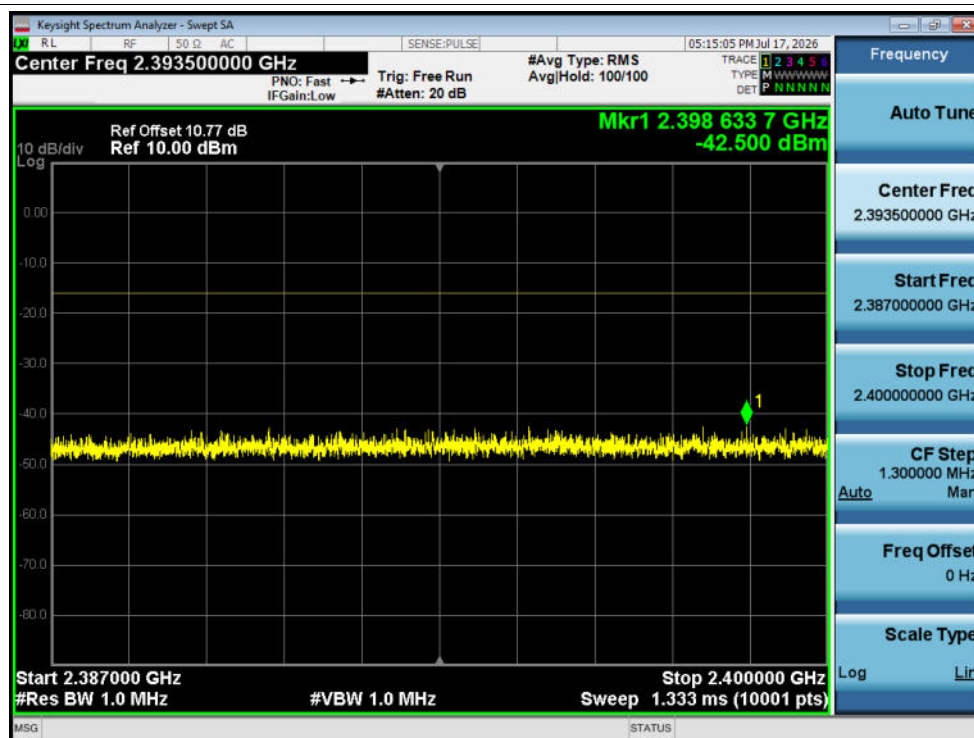


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2387MHz-2400MHz

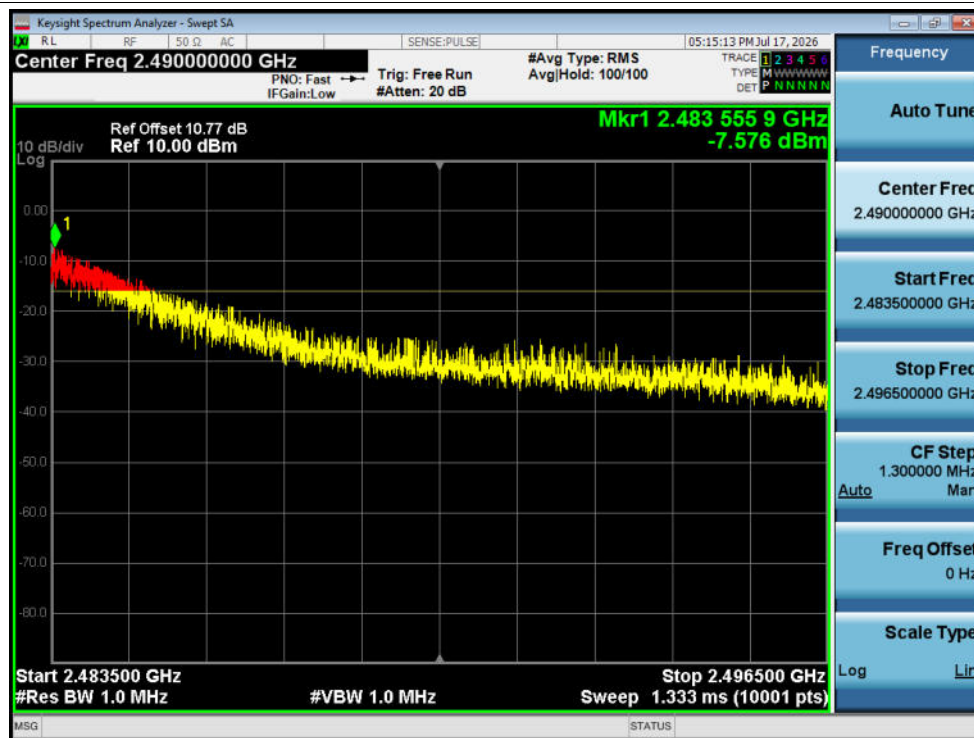

Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

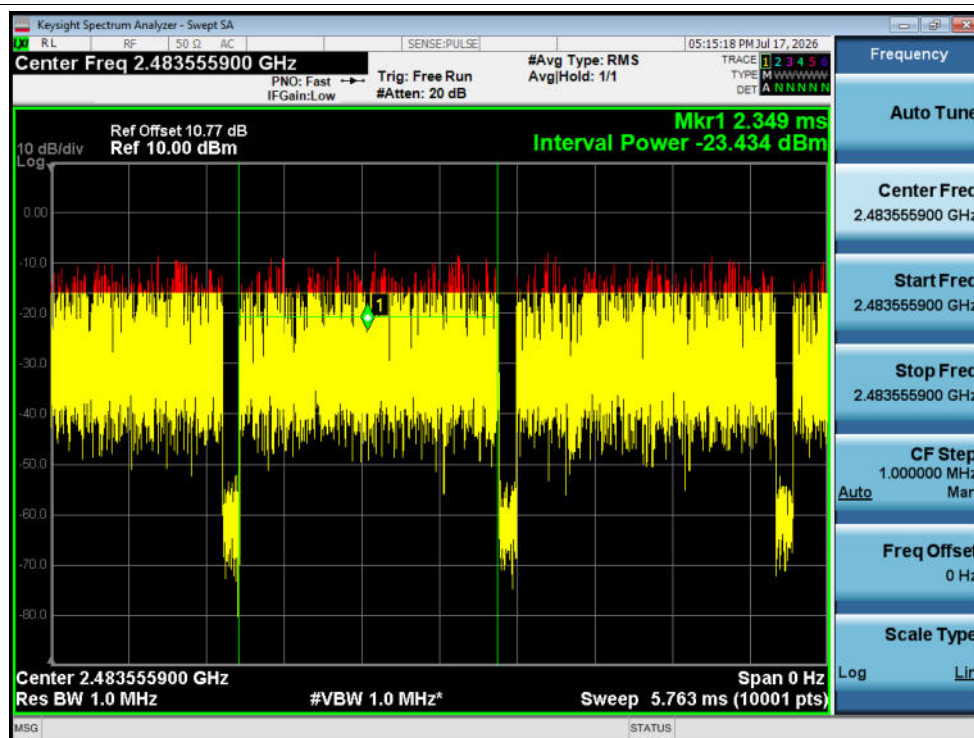


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz Final

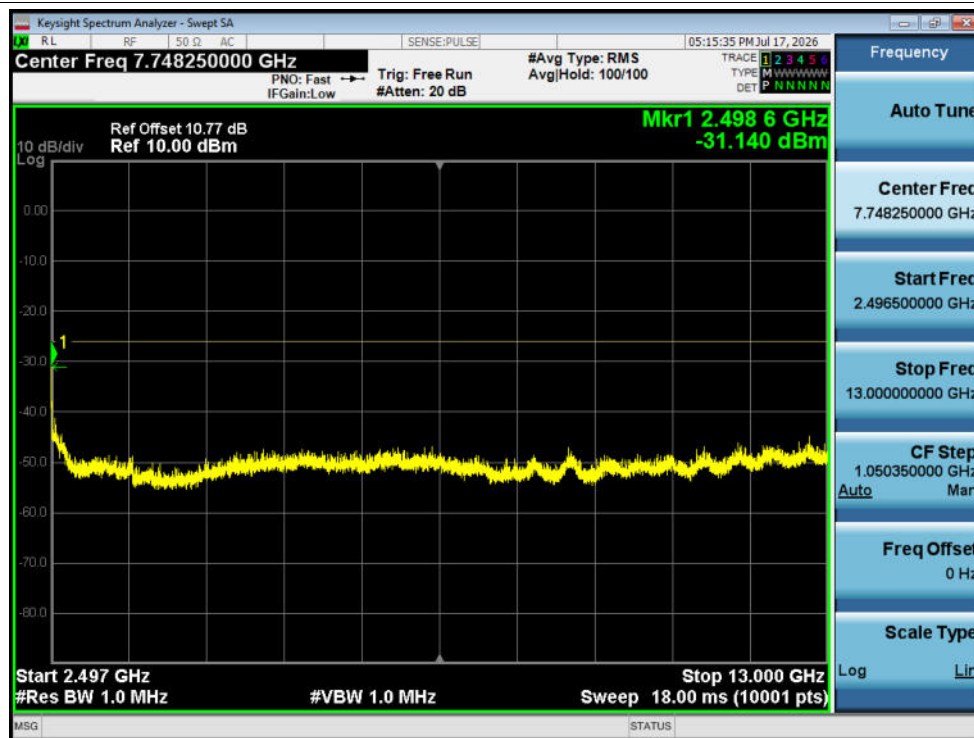


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2496.5MHz-13000MHz

Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	b	2412	Ant1	30-1000	80.05	-58.35	-59.4	1.4622	1.1482	4	Pass
NVNT	b	2412	Ant1	1000-13000	12238.00	-56.56	-57.68	2.208	1.7061	20	Pass
NVNT	b	2442	Ant1	30-1000	80.05	-57.24	-59.53	1.888	1.1143	4	Pass
NVNT	b	2442	Ant1	1000-13000	12797.20	-55.45	-58.59	2.851	1.3836	20	Pass
NVNT	b	2472	Ant1	30-1000	80.05	-58.48	-59.23	1.4191	1.194	4	Pass
NVNT	b	2472	Ant1	1000-13000	12746.80	-56.15	-57.86	2.4266	1.6368	20	Pass
NVNT	g	2412	Ant1	30-1000	80.05	-59.10	-59.16	1.2303	1.2134	4	Pass
NVNT	g	2412	Ant1	1000-13000	12787.60	-55.74	-57.69	2.6669	1.7022	20	Pass
NVNT	g	2442	Ant1	30-1000	80.05	-59.13	-59.46	1.2218	1.1324	4	Pass
NVNT	g	2442	Ant1	1000-13000	12167.20	-55.68	-58.88	2.704	1.2942	20	Pass
NVNT	g	2472	Ant1	30-1000	80.05	-57.43	-59.18	1.8072	1.2078	4	Pass
NVNT	g	2472	Ant1	1000-13000	12768.40	-55.92	-57.94	2.5586	1.6069	20	Pass
NVNT	n20	2412	Ant1	30-1000	80.05	-59.04	-59.54	1.2474	1.1117	4	Pass
NVNT	n20	2412	Ant1	1000-13000	12689.20	-55.97	-58.25	2.5293	1.4962	20	Pass
NVNT	n20	2442	Ant1	30-1000	80.05	-59.18	-59.62	1.2078	1.0914	4	Pass
NVNT	n20	2442	Ant1	1000-13000	5770.00	-55.24	-54.05	2.9923	3.9355	20	Pass
NVNT	n20	2472	Ant1	30-1000	80.05	-59.19	-59.63	1.205	1.0889	4	Pass
NVNT	n20	2472	Ant1	1000-13000	12772.00	-54.71	-58.43	3.3806	1.4355	20	Pass

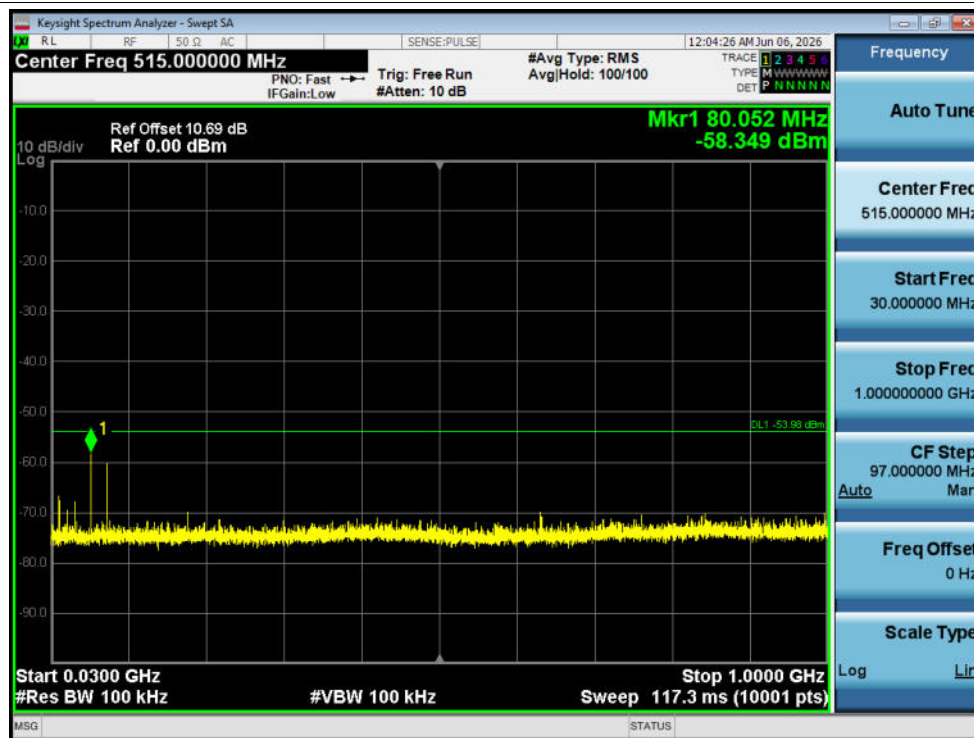


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

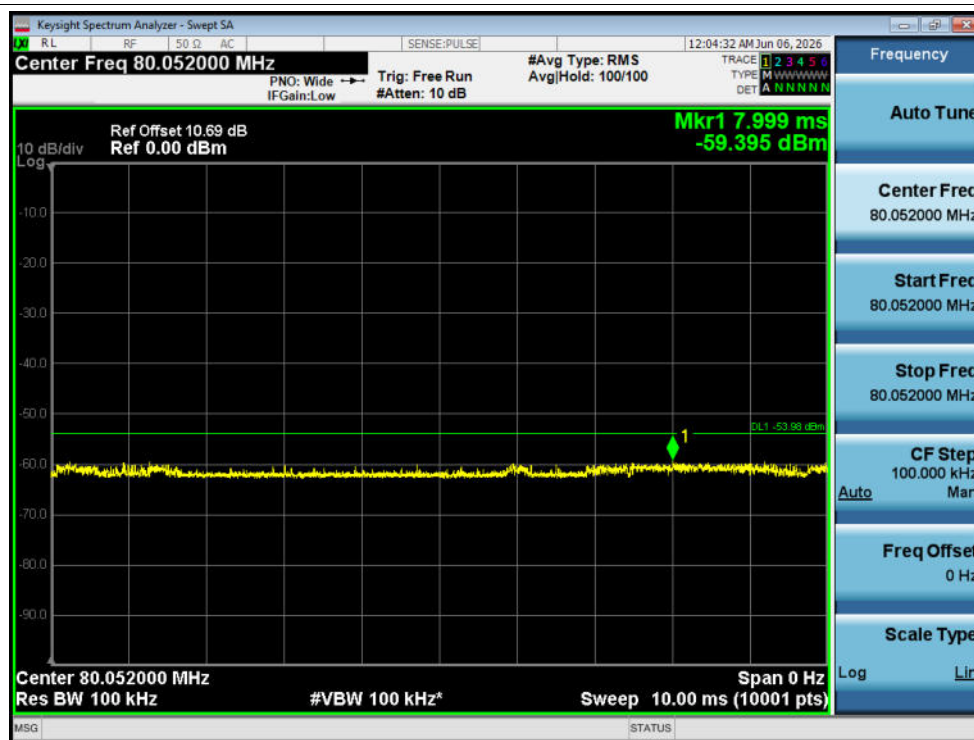


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz Final

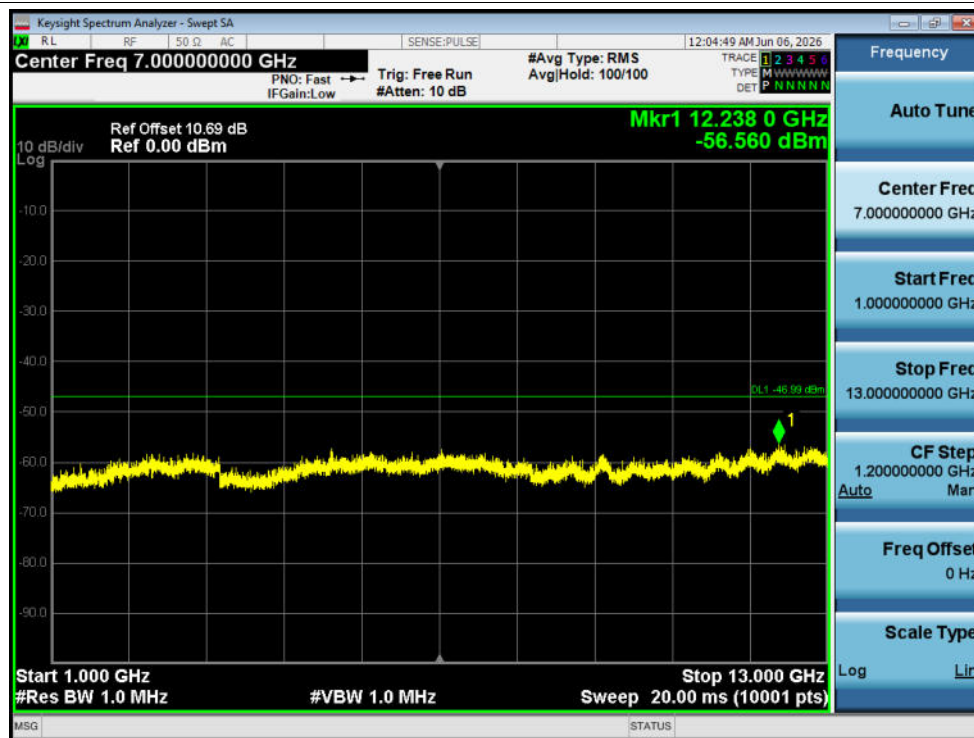


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz

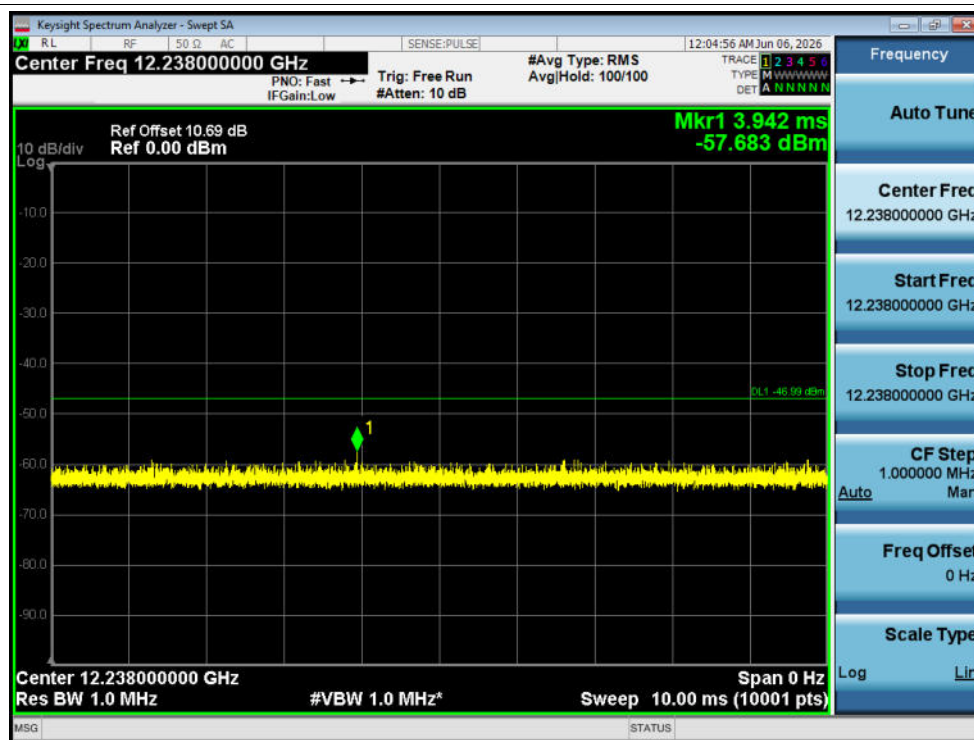


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz Final

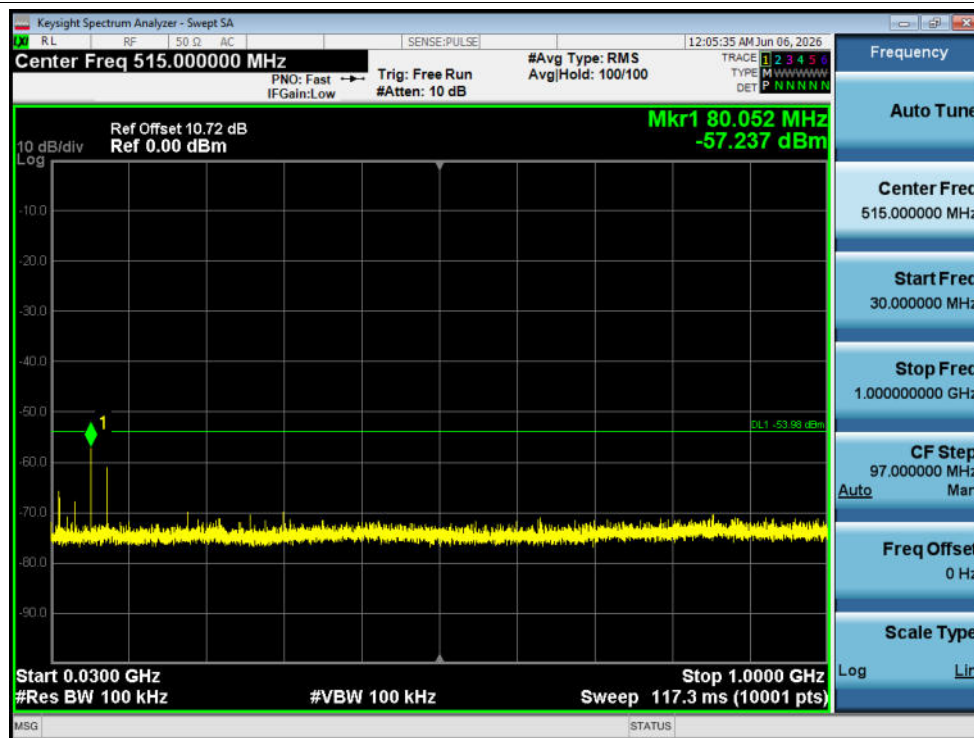


Rx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

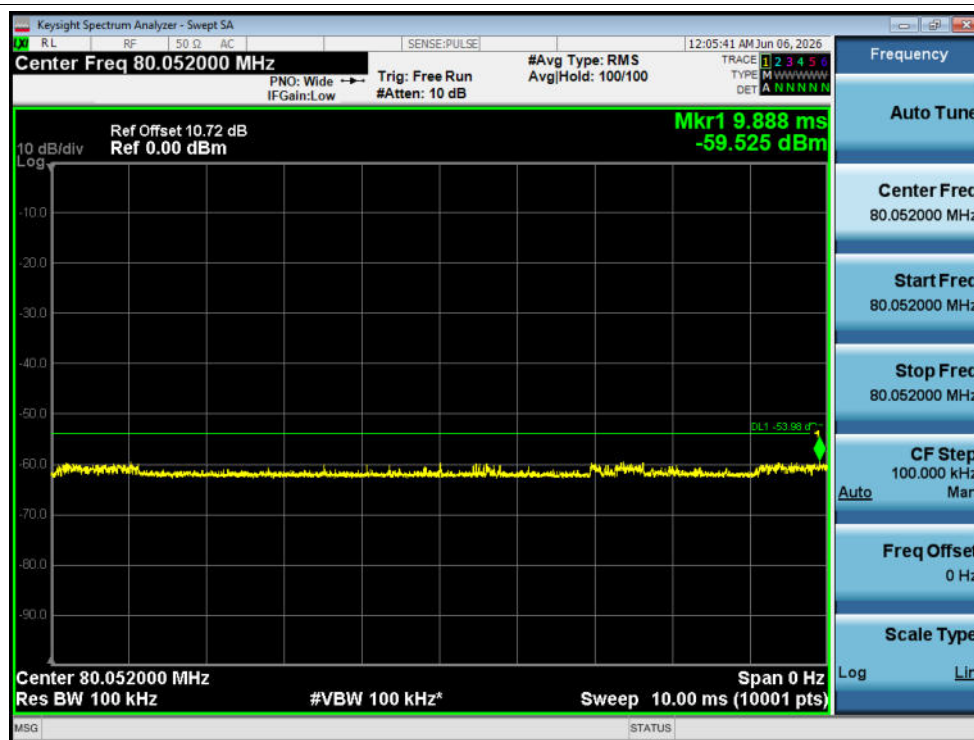


Rx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz Final

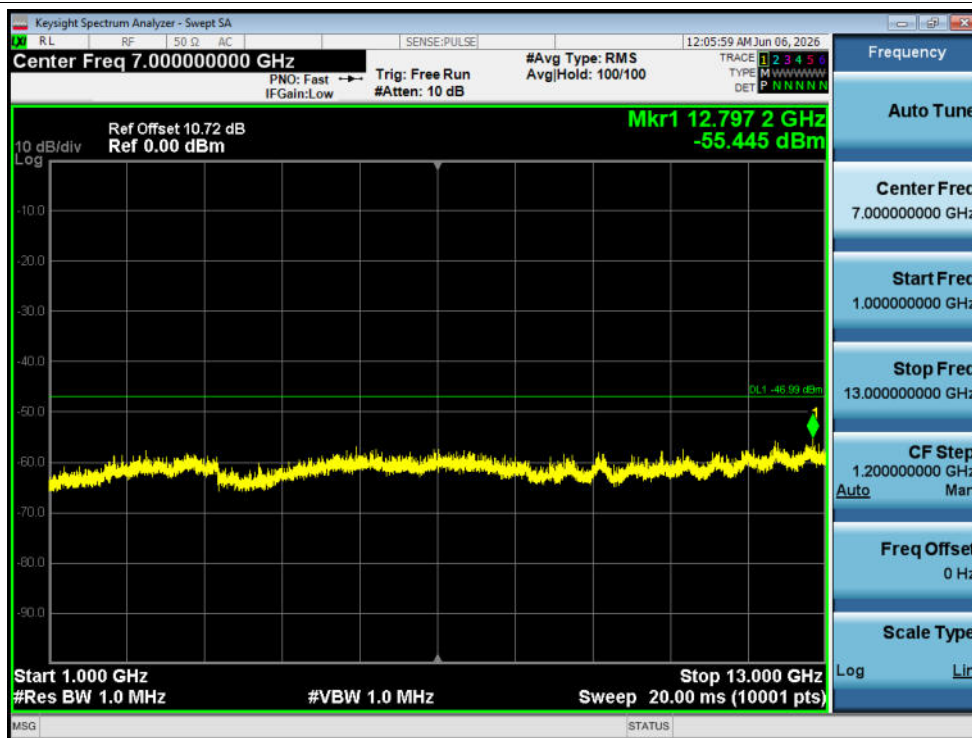


Rx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-13000MHz

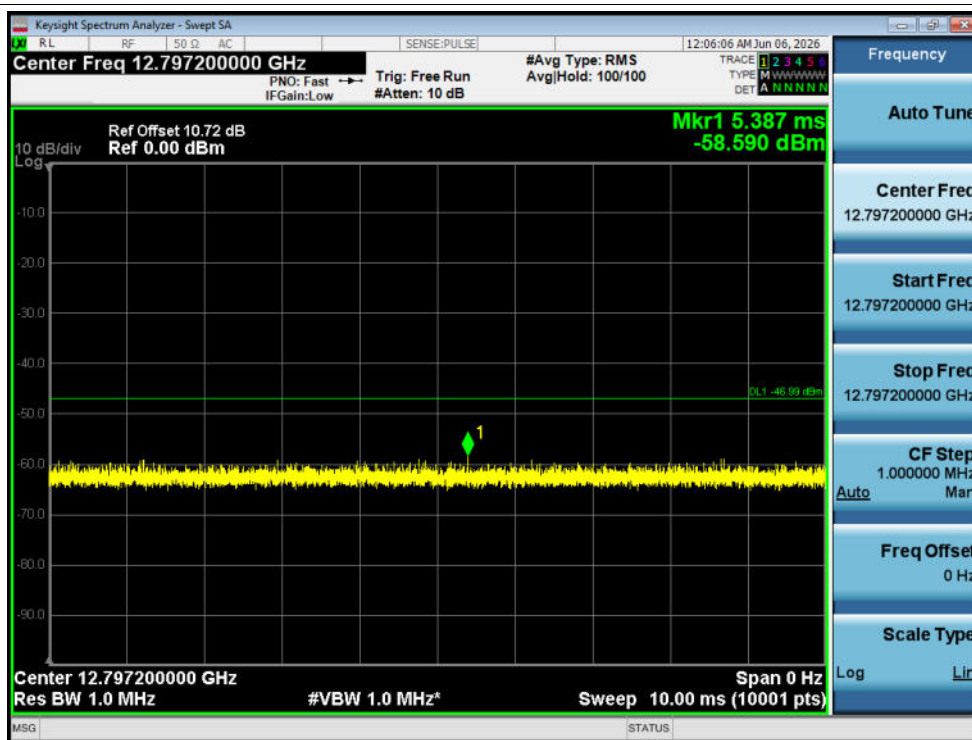


Rx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-13000MHz Final

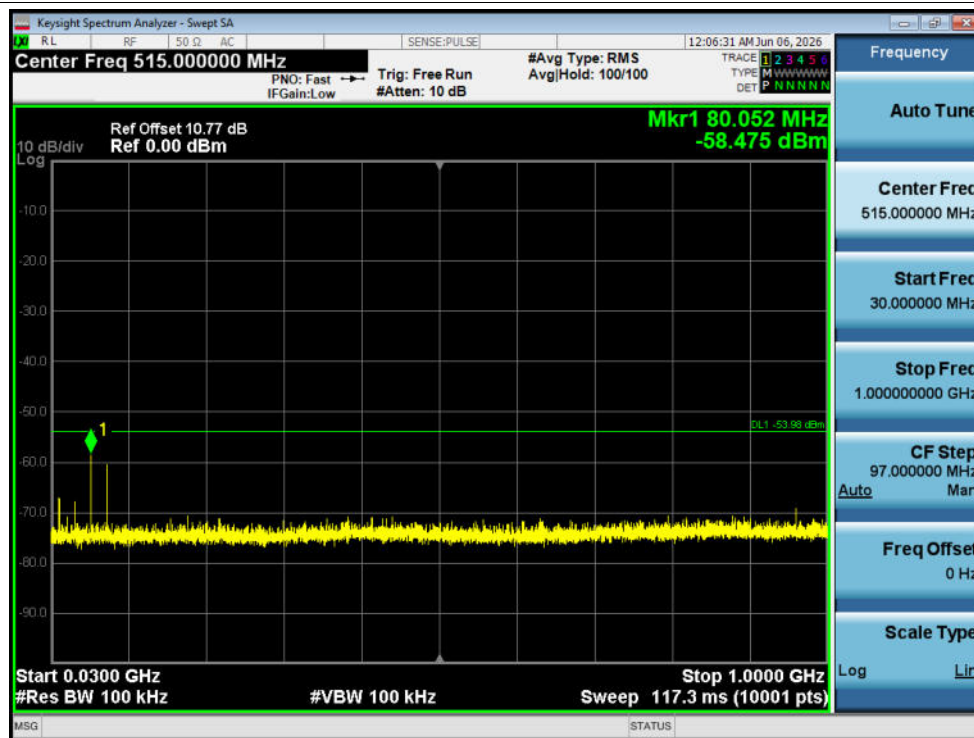


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

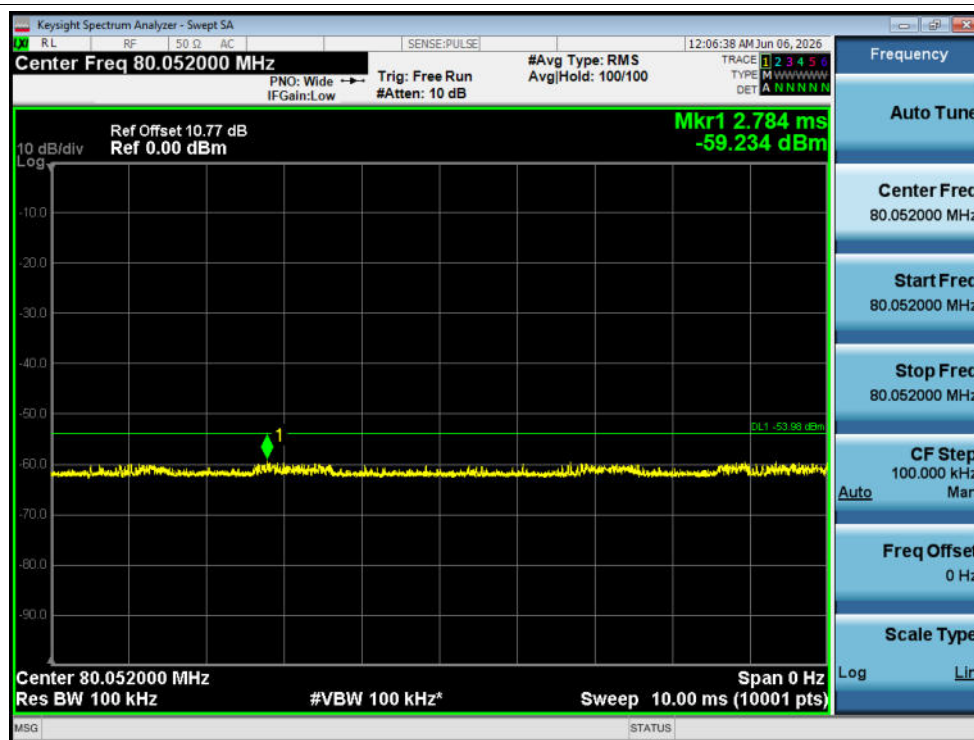


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz Final

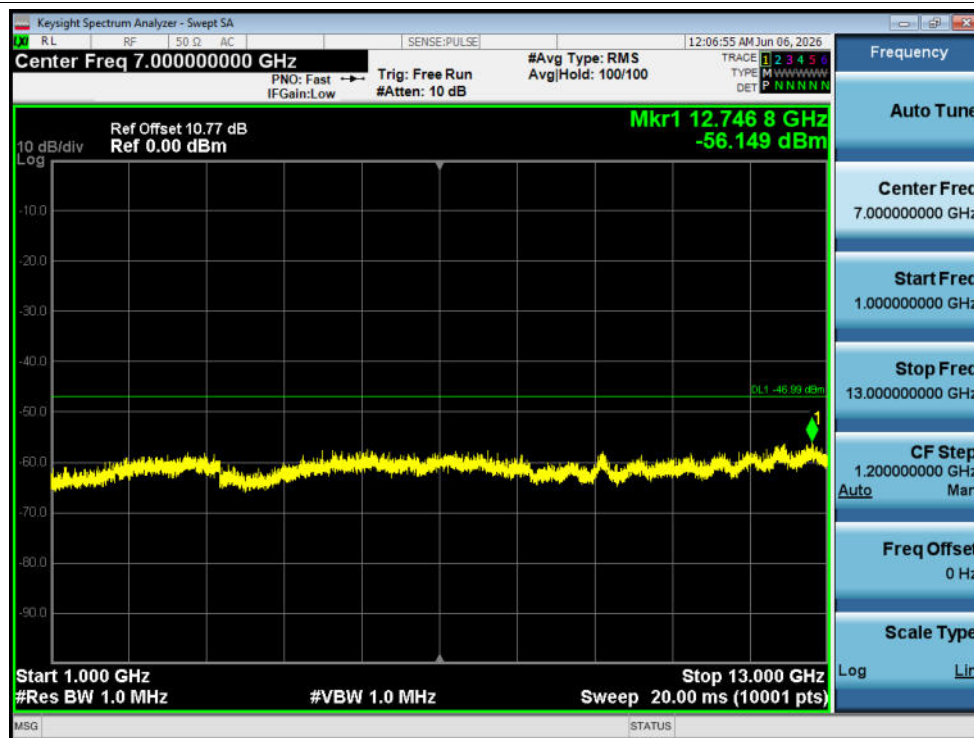


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz

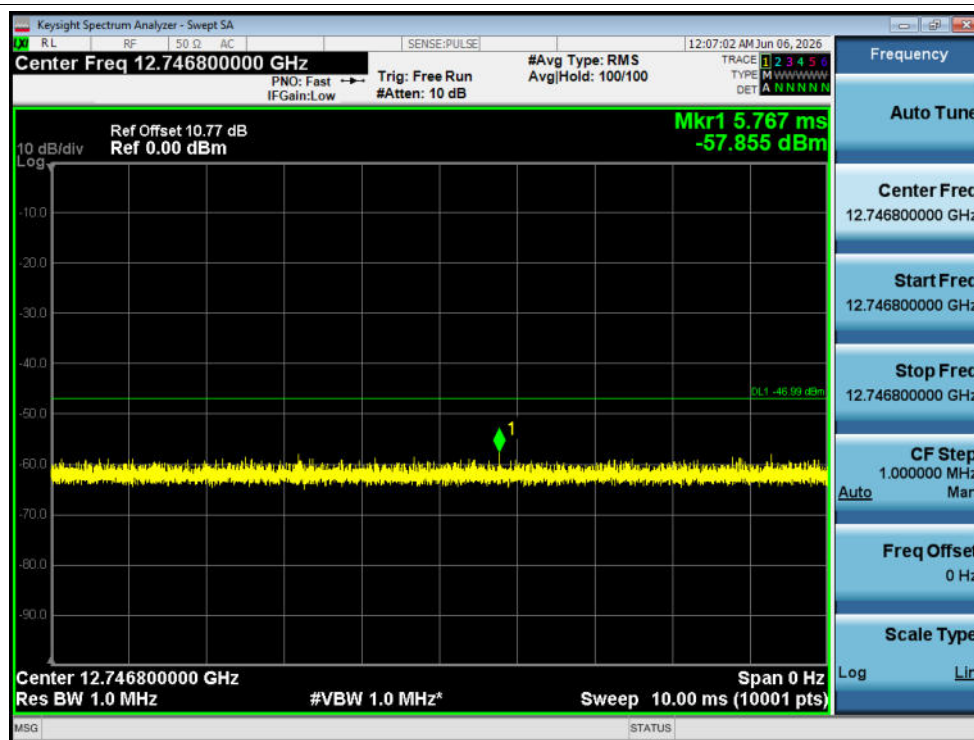


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz Final

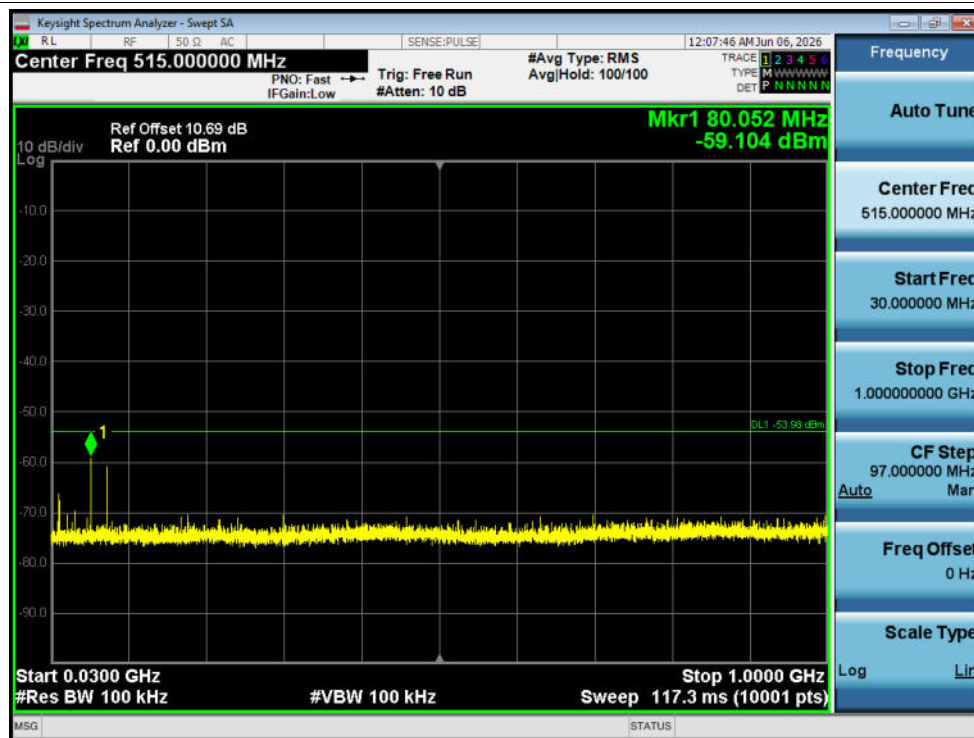


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

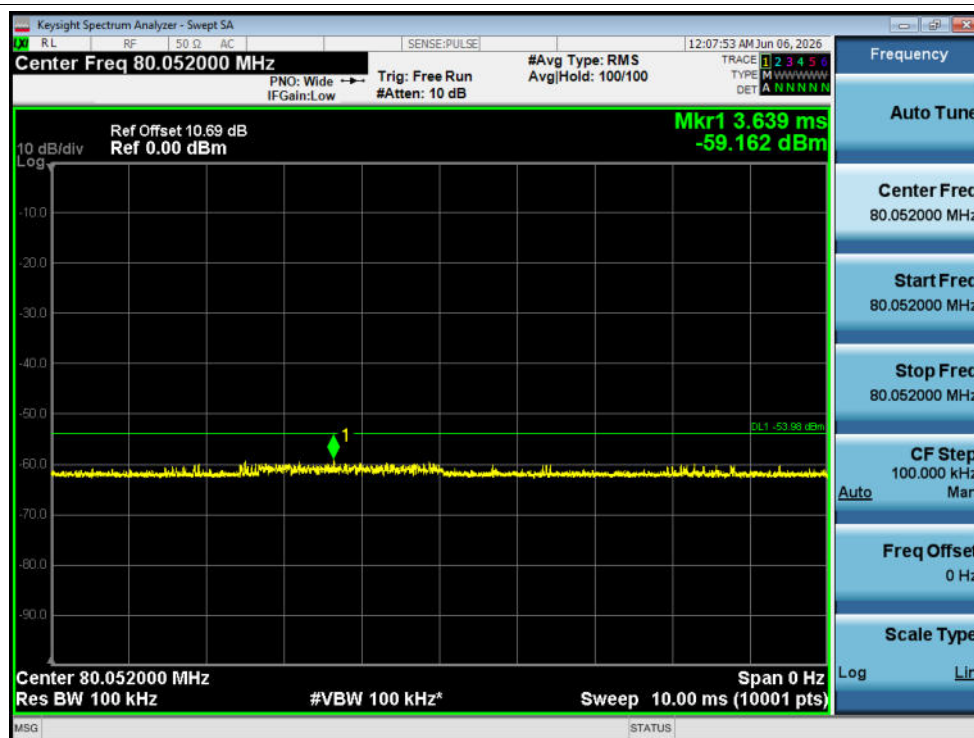


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz Final

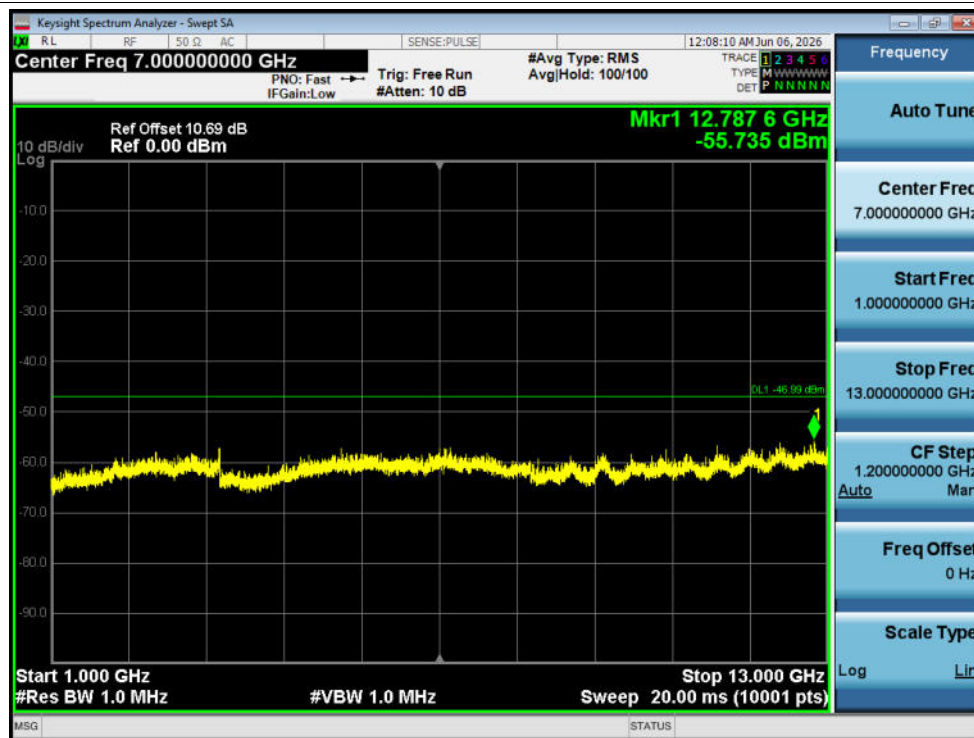


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz

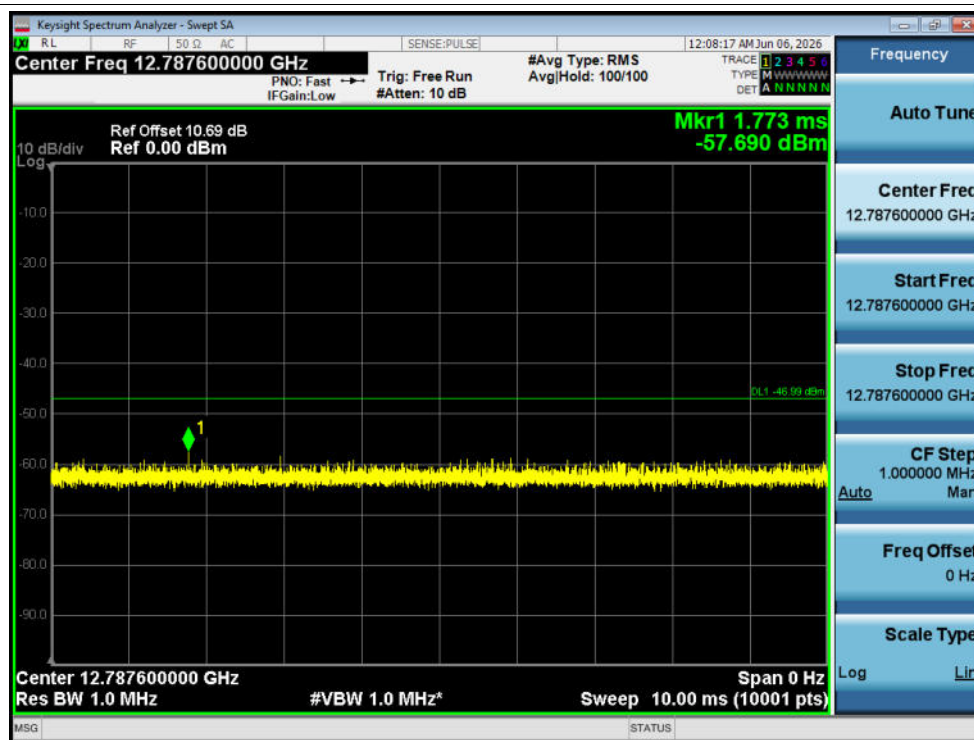


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz Final

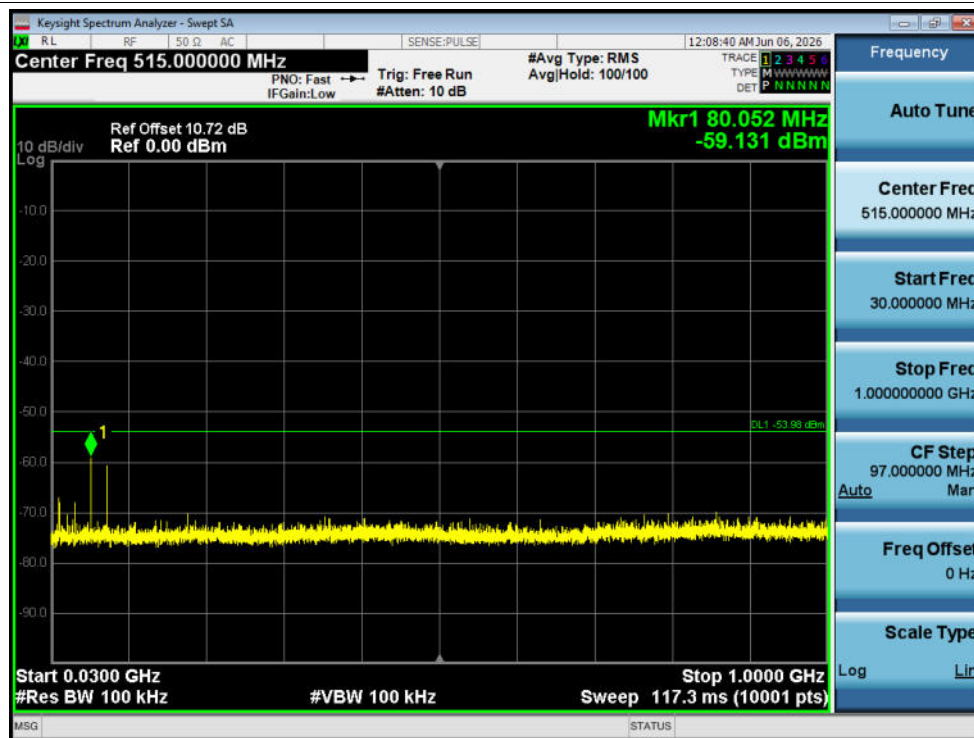


Rx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

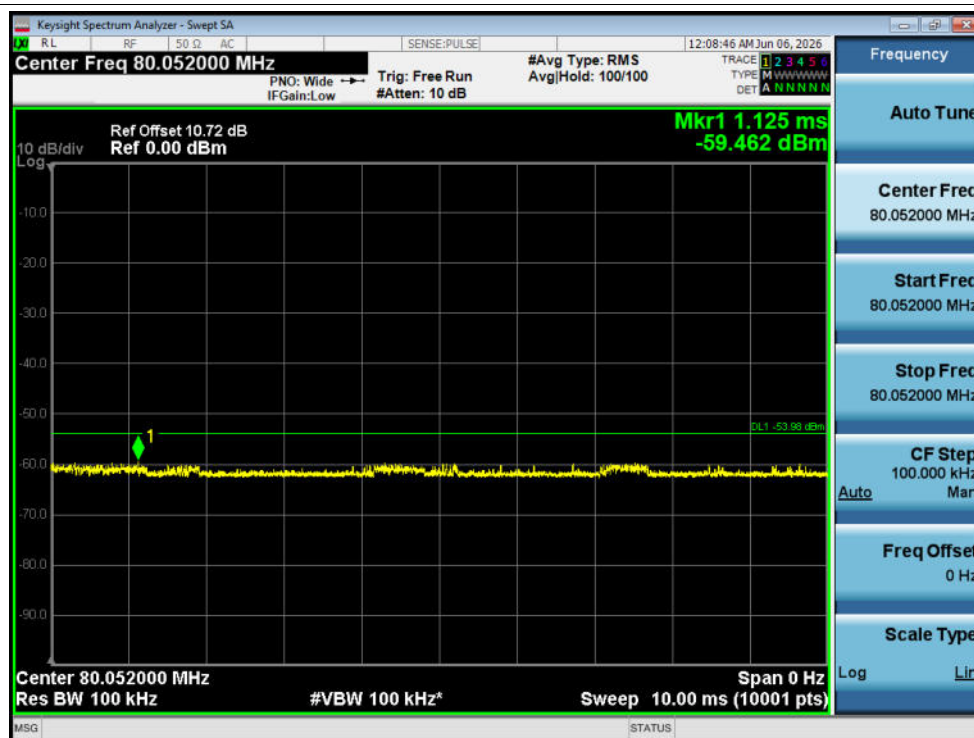


Rx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz Final

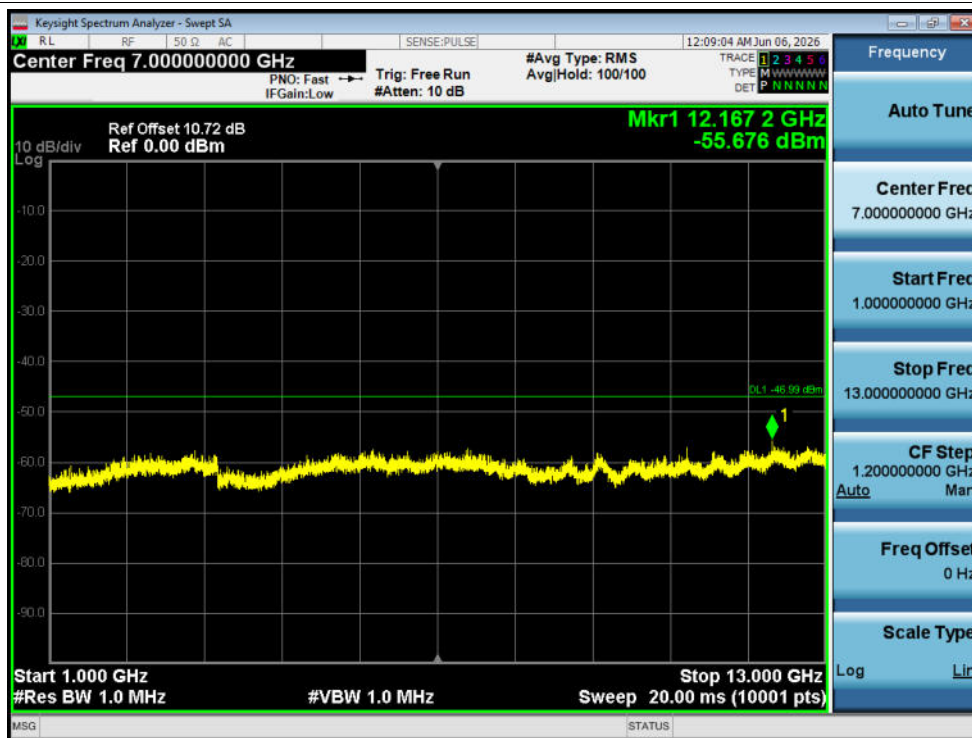


Rx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-13000MHz

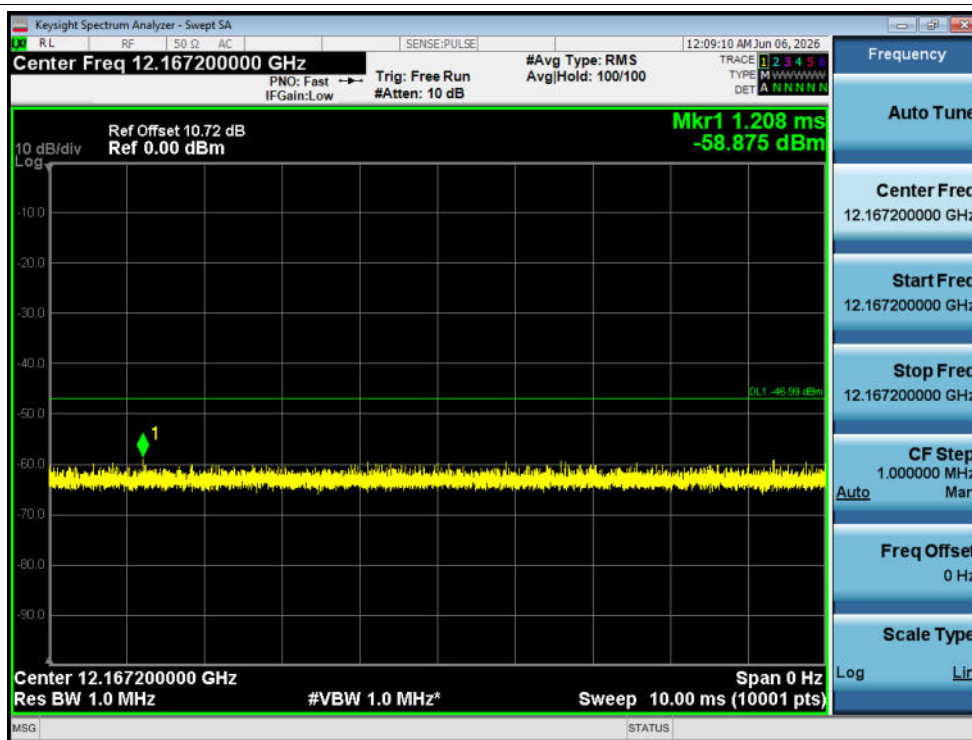


Rx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-13000MHz Final

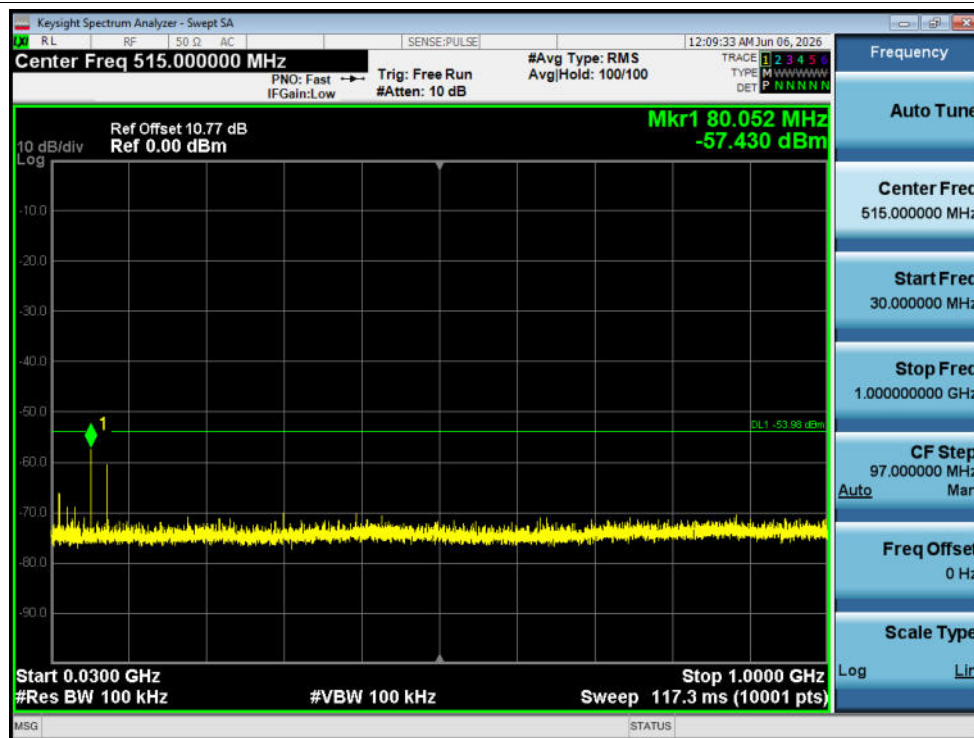


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

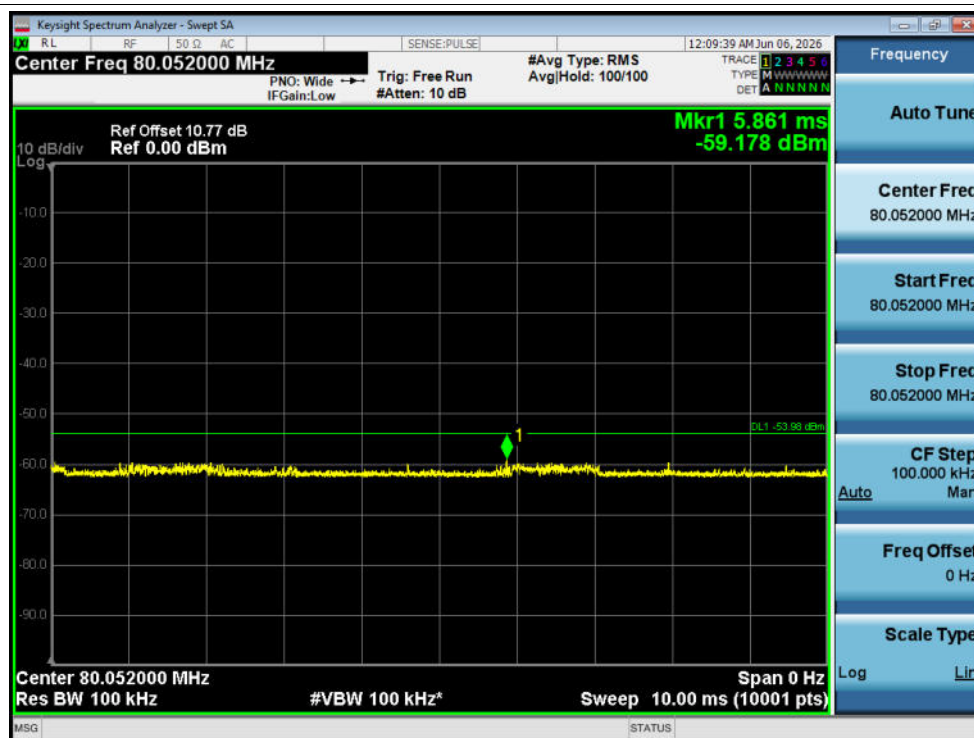


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz Final

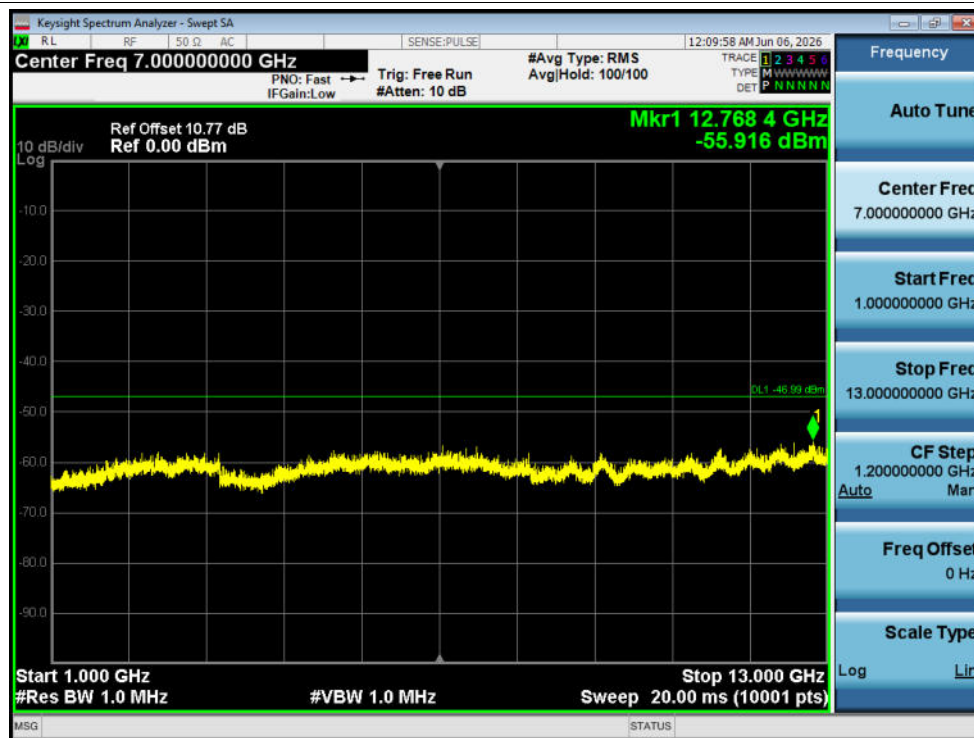


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz

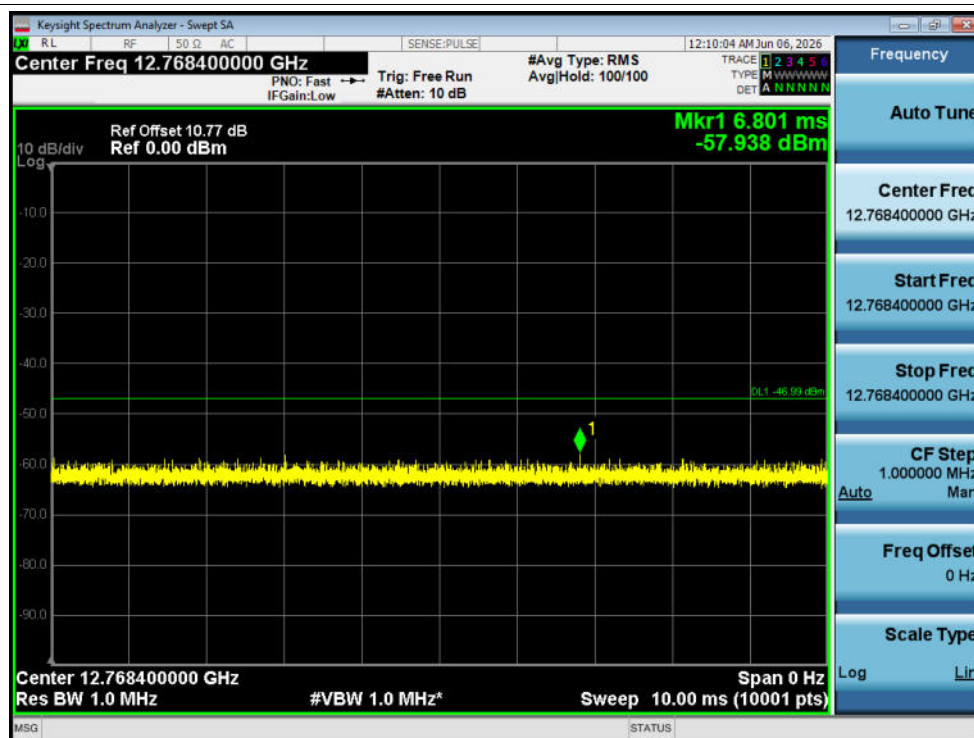


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz Final

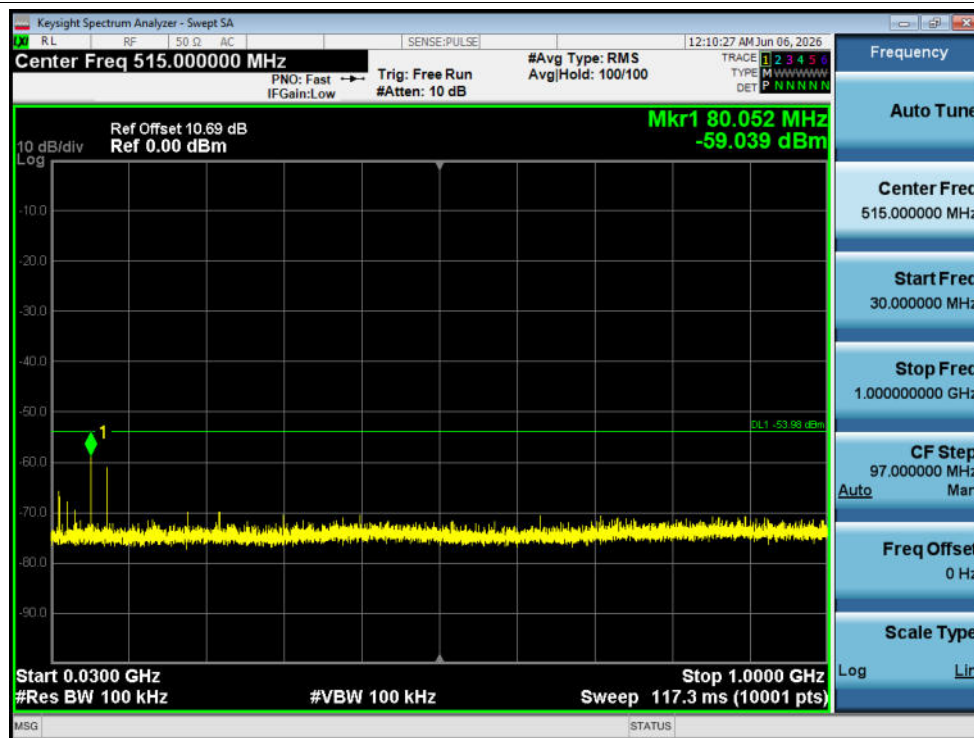


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

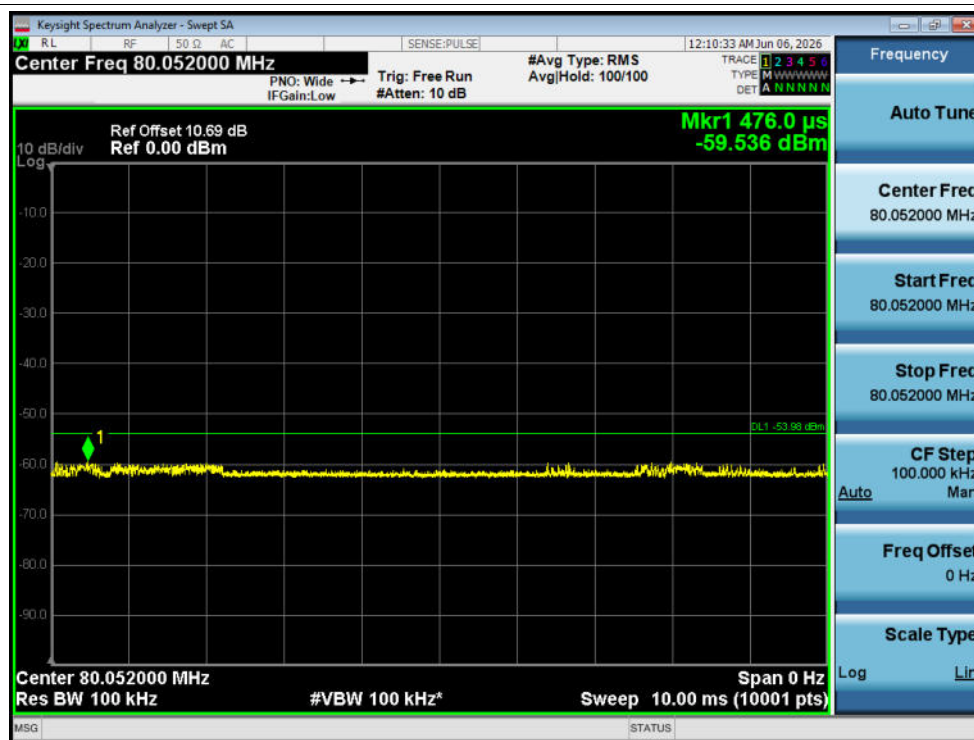


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz Final

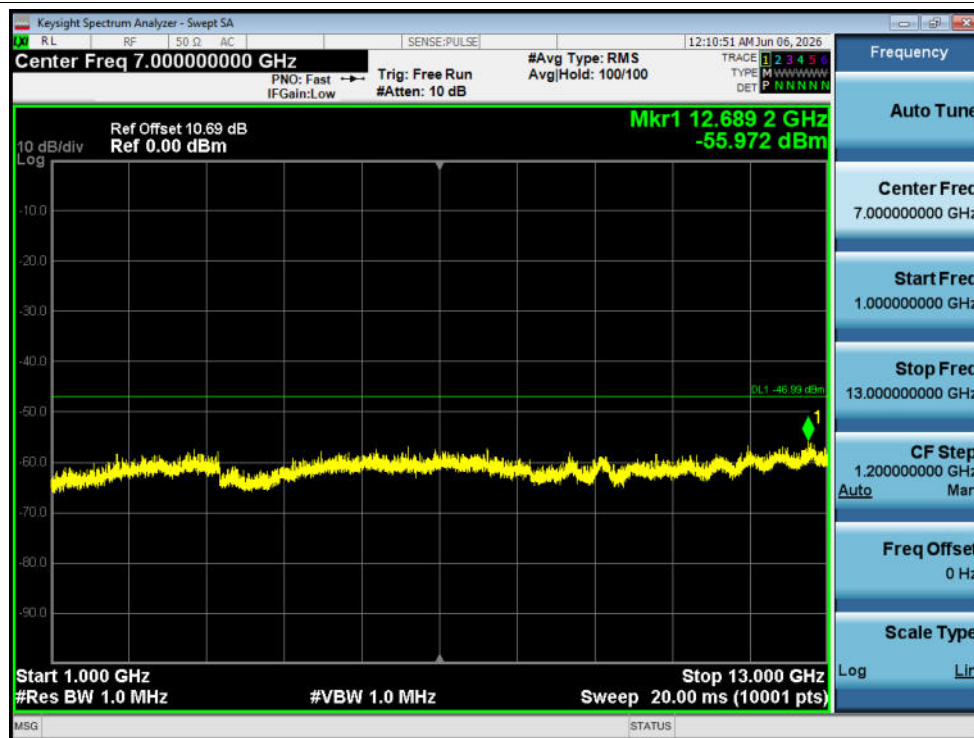


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz

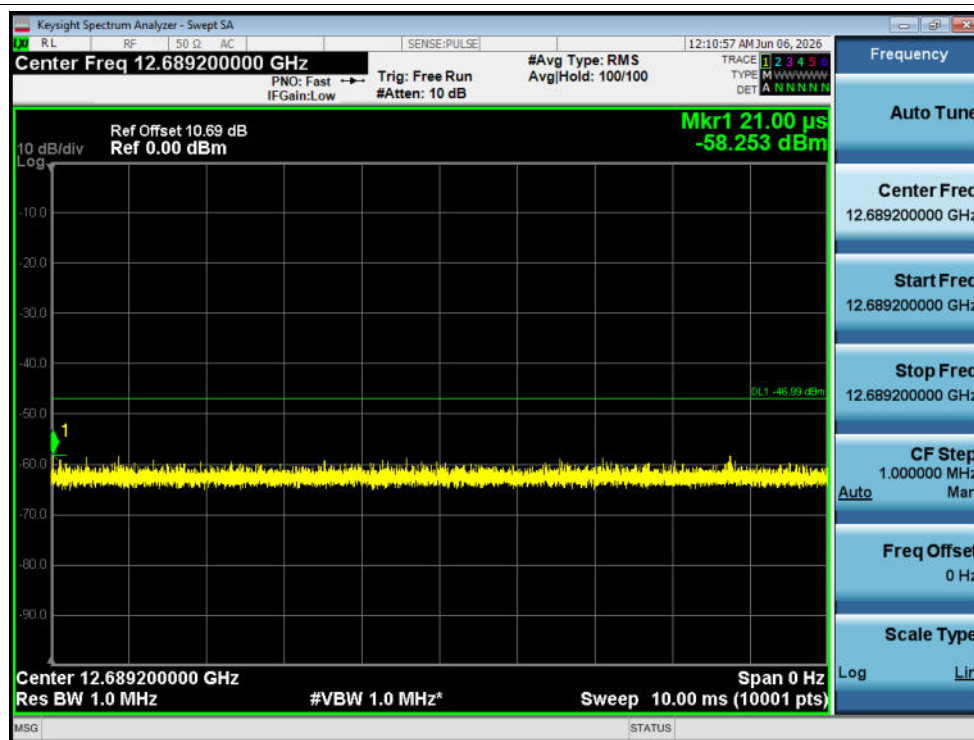


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz Final

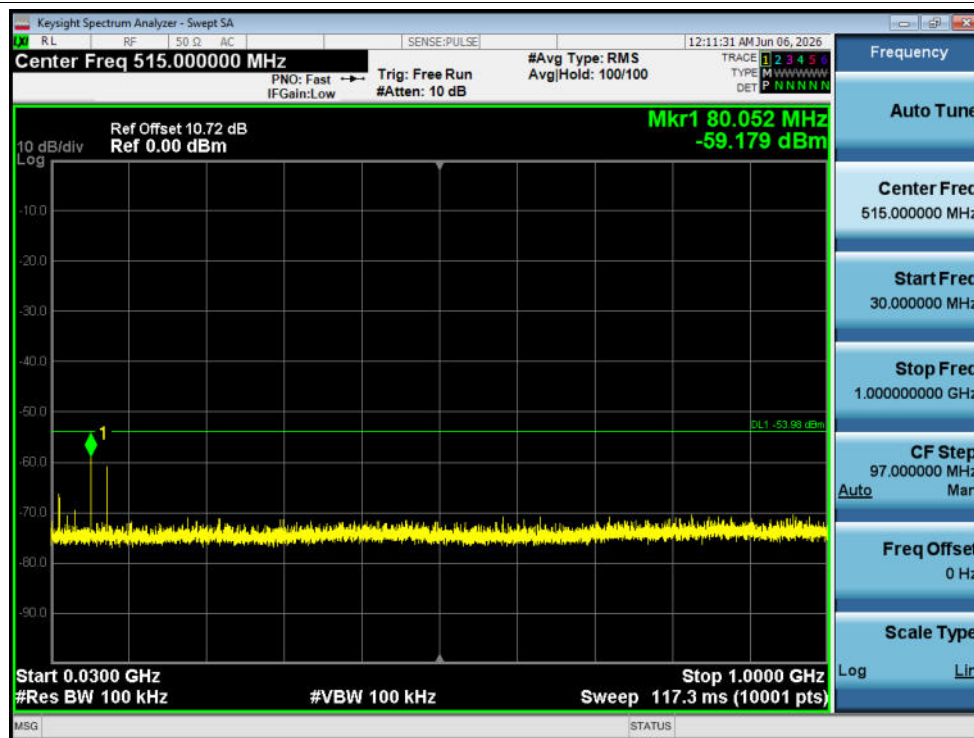


Rx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

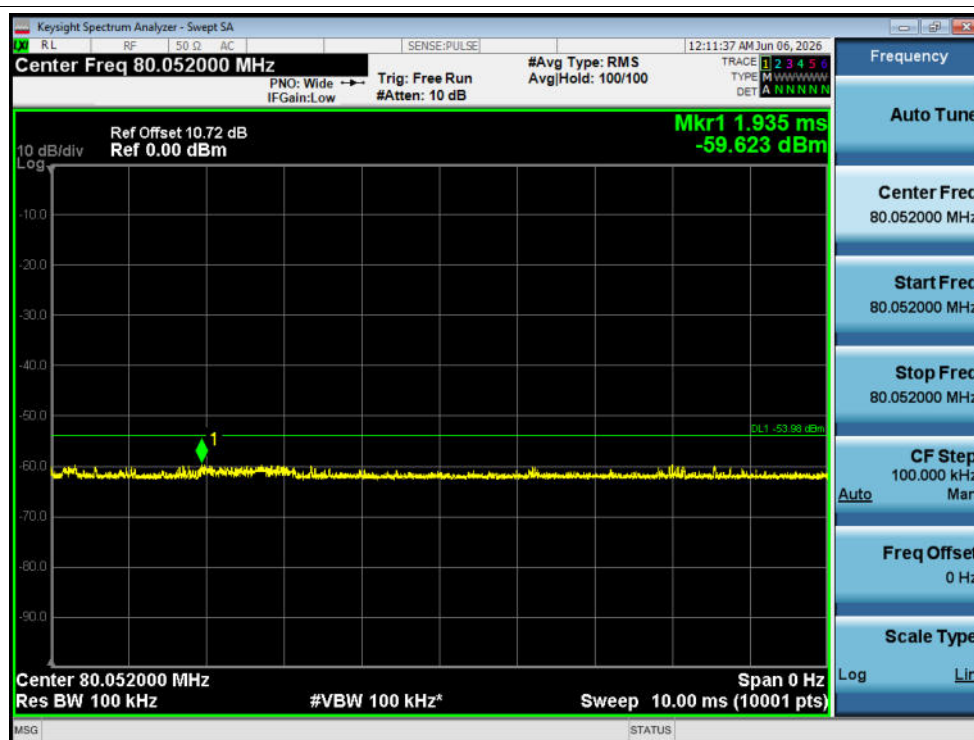


Rx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz Final

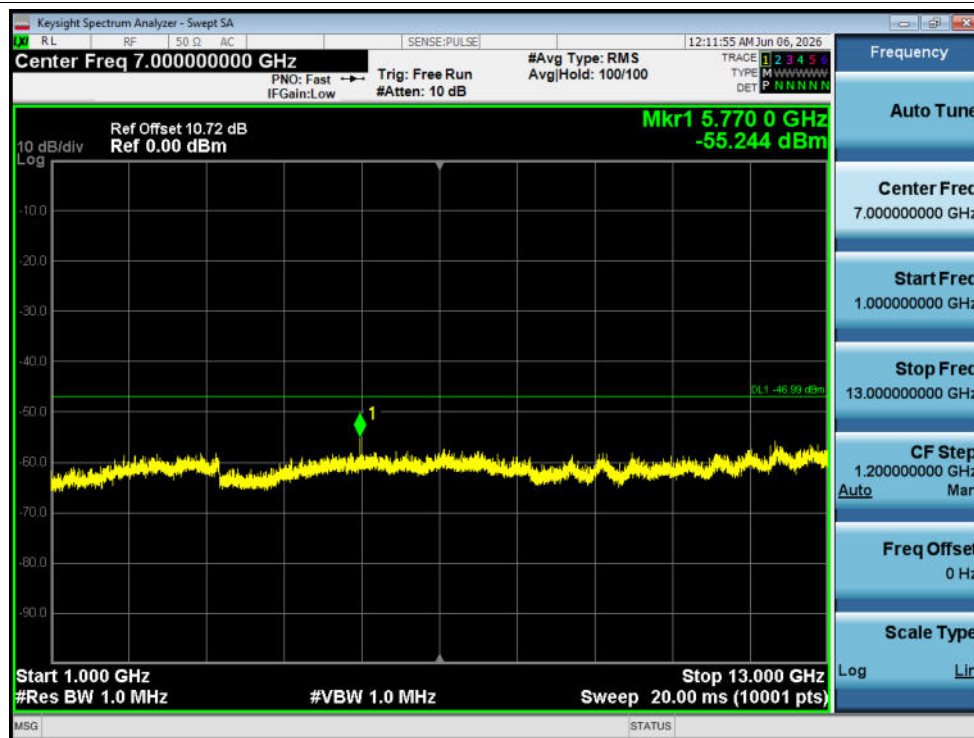


Rx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-13000MHz

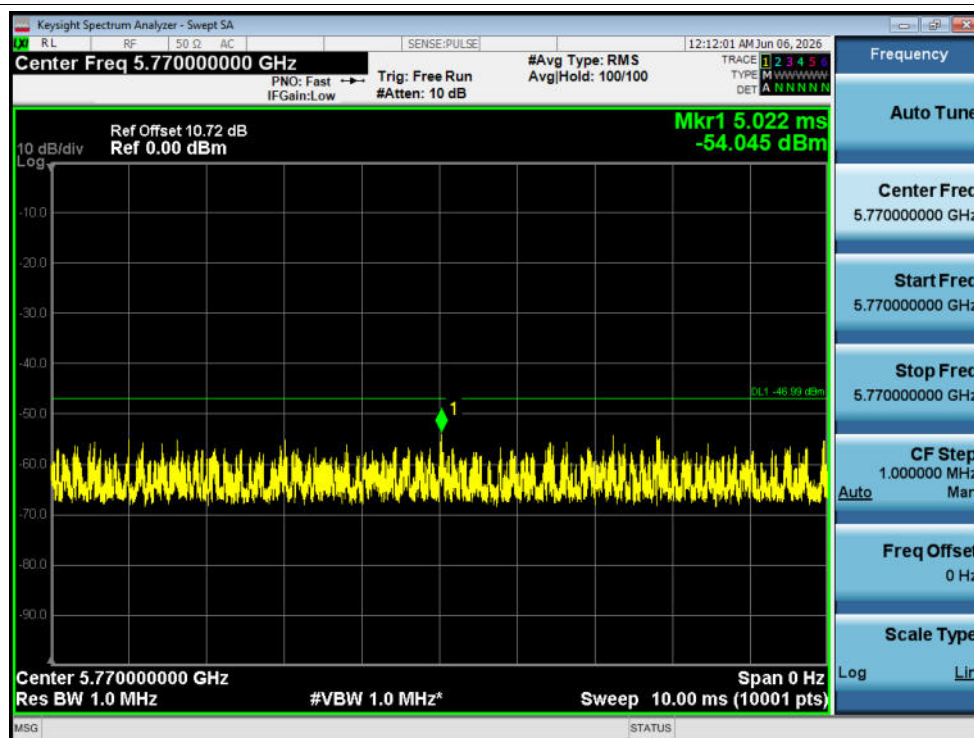


Rx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-13000MHz Final

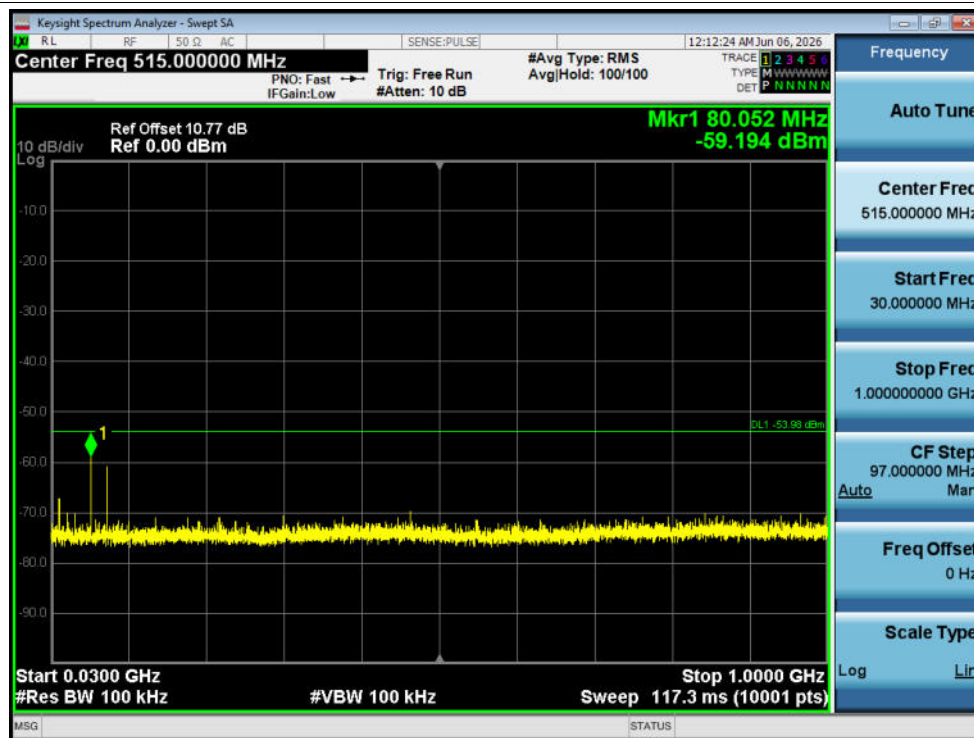


Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

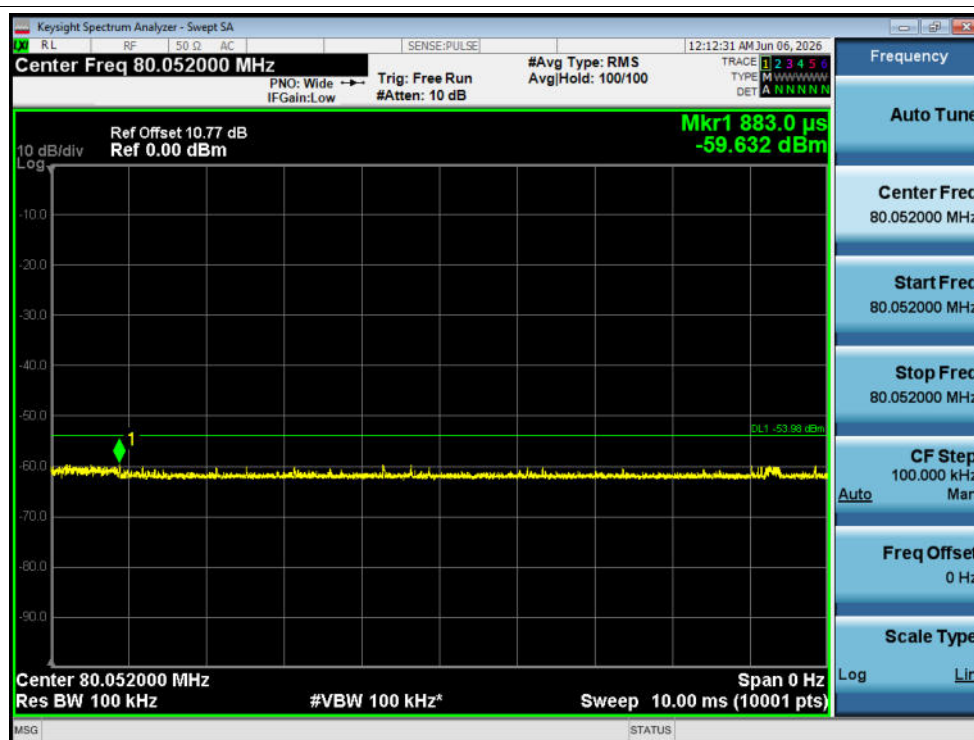

Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz Final

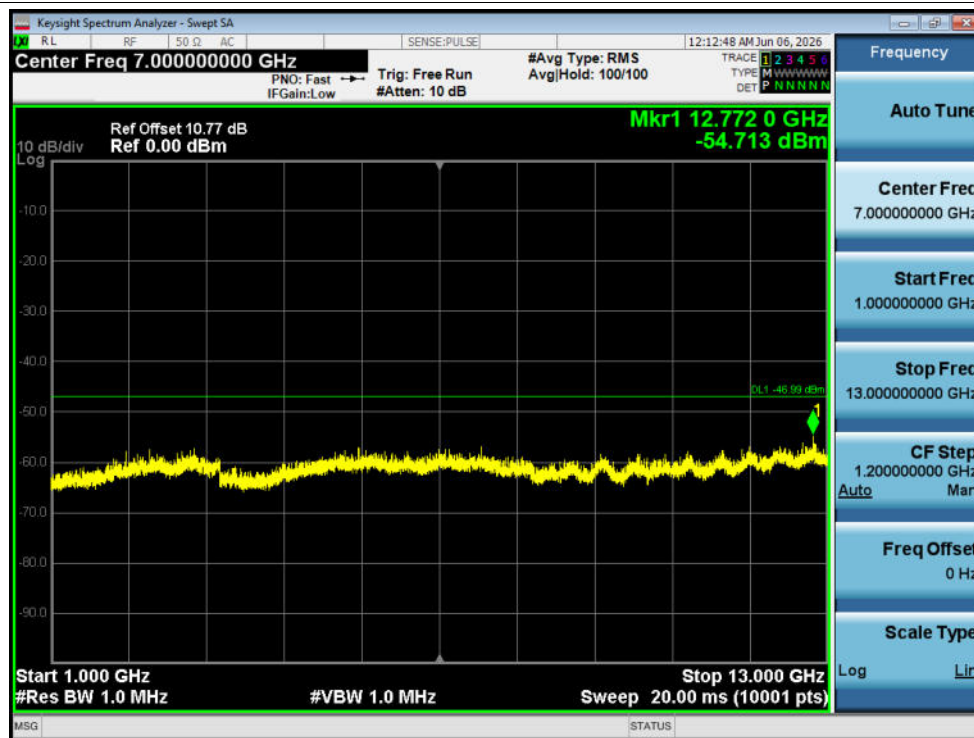

Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz

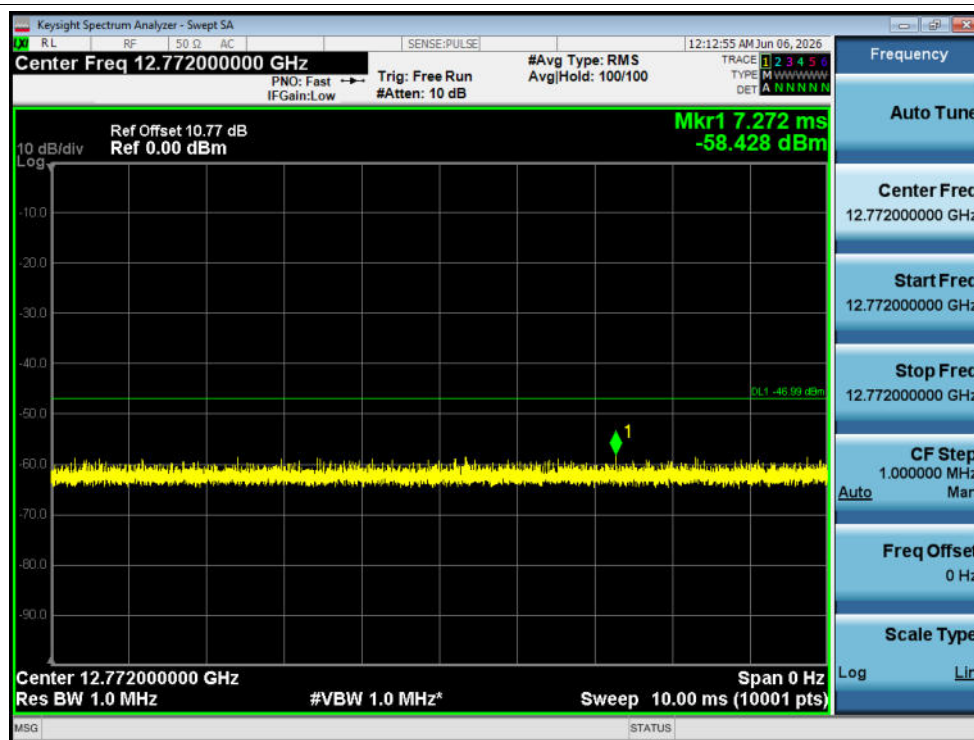

Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz Final