

附錄一

受測裝置之測試結果

目錄	頁次
1. 場強輻射之量測.....	2
1.1. 30-1000MHz 頻率範圍，其他不必要發射量測	3
1.2. 1000MHz 以上頻率範圍，其他不必要發射量測	5
1.3. 禁用頻帶量測結果（其他不必要發射）.....	7
2. 20dB 頻寬之量測.....	11
2.1. 20dB 頻寬.....	11
2.2. 20dB 頻寬之量測圖	12
3. 載波頻率間隔之量測.....	13
3.1. 載波頻率間隔.....	13
3.2. 載波頻率間隔之量測圖.....	14
4. 跳頻頻率數目之量測.....	16
5. 佔用時間(停留時間)之量測.....	17
5.1. 佔用時間(停留時間).....	17
6. 峰值輸出功率之量測.....	29
6.1. 峰值輸出功率.....	29
6.2. 峰值輸出功率之量測圖.....	30
7. 頻帶邊緣之 RF 傳導發射之量測	31
8. 混附發射之 RF 傳導發射之量測	32

1. 場強輻射之量測

【經實驗室評估量測後，以最差之調變方式 8-DPSK 進行本章節之測試】

本裝置有兩種電源供應模式分別為電池(DC 3.7V)、充電傳輸底座(DC 5V)，實驗室以單機(電池供電)搭配平放、站立、側立三軸及經充電傳輸底座進行評估，最後選取最大場強值的擺設方式-經充電傳輸底座(DC 5V)以低、中、高頻率來進行量測，並將下列測試模式之測試數據隨案件所附，所得讀值資料請見章節 1.1 ~ 1.2：

模式	動作狀態	基本頻率	量測頻率範圍
BT (8-DPSK)	發射	2402MHz (CH0)	1000-25000MHz
	發射	2441MHz (CH39)*	30-1000MHz
			1000-25000MHz
	發射	2480MHz (CH78)	1000-25000MHz
	接收	2441MHz(CH39)	30-1000MHz
			1000-25000MHz

註：*：經評估後，以最差頻率進行 30-1000MHz 量測。

對受測物裝置落於技術規範第 2.7 章節的禁用頻率之混附發射以下列測試模式依規定分別進行量測，所得量測資料請見章節 1.3。

模式	動作狀態	基本頻率	量測頻率範圍
BT (8-DPSK)	發射	2402MHz (CH0)	2310-2430MHz
		2480MHz (CH78)	2450-2900MHz

測試日期	2020/02/12	環境溫/濕度	20 ~ 21°C/55 ~ 61%
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)	測試人員	Sean Wang

1.1. 30-1000MHz 頻率範圍，其他不必要發射量測

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	23.73	1.25	0.95	25.93	40.00	14.07	Peak
203.630	16.47	3.46	13.95	33.88	43.50	9.62	Peak
249.220	18.78	3.93	9.57	32.28	46.00	13.72	Peak
585.810	24.62	6.86	0.55	32.03	46.00	13.97	Peak
828.310	26.72	8.06	3.51	38.29	46.00	7.71	Peak
983.510	27.94	8.95	0.77	37.66	54.00	16.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	23.73	1.25	11.42	36.40	40.00	3.60	Peak
203.630	16.47	3.46	7.62	27.55	43.50	15.95	Peak
328.760	20.56	4.89	2.99	28.44	46.00	17.56	Peak
516.940	23.90	6.77	2.08	32.75	46.00	13.25	Peak
944.710	27.66	8.72	1.35	37.73	46.00	8.27	Peak
996.120	28.04	9.02	1.30	38.36	54.00	15.64	Peak

Mode	---	Frequency	RX 2441MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	23.73	1.25	-0.48	24.50	40.00	15.50	Peak
203.630	16.47	3.46	17.13	37.06	43.50	6.44	Peak
437.400	22.92	6.22	1.20	30.34	46.00	15.66	Peak
830.250	26.75	8.07	4.16	38.98	46.00	7.02	Peak
916.580	27.44	8.55	5.62	41.61	46.00	4.39	Peak
983.510	27.94	8.95	1.55	38.44	54.00	15.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	23.73	1.25	11.67	36.65	40.00	3.35	Peak
203.630	16.47	3.46	7.57	27.50	43.50	16.00	Peak
610.060	24.84	6.93	0.76	32.53	46.00	13.47	Peak
777.870	26.26	7.79	1.15	35.20	46.00	10.80	Peak
926.280	27.51	8.61	1.49	37.61	46.00	8.39	Peak
988.360	27.99	8.97	1.84	38.80	54.00	15.20	Peak

1.2. 1000MHz 以上頻率範圍，其他不必要發射量測

頻率範圍量測至主波發射的 10 倍諧波，其他未列在報告上乃因訊號太小無法量測。

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.92	10.22	-2.84	41.30	54.00	12.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.92	10.22	-2.67	41.47	54.00	12.53	Peak

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-3.48	41.12	54.00	12.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-4.02	40.58	54.00	13.42	Peak

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.32	10.27	-2.99	41.60	54.00	12.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.32	10.27	-2.60	41.99	54.00	12.01	Peak

Mode	---	Frequency	RX 2441MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-4.35	40.25	54.00	13.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-2.44	42.16	54.00	11.84	Peak


1.3. 禁用頻帶量測結果 (其他不必要發射)

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

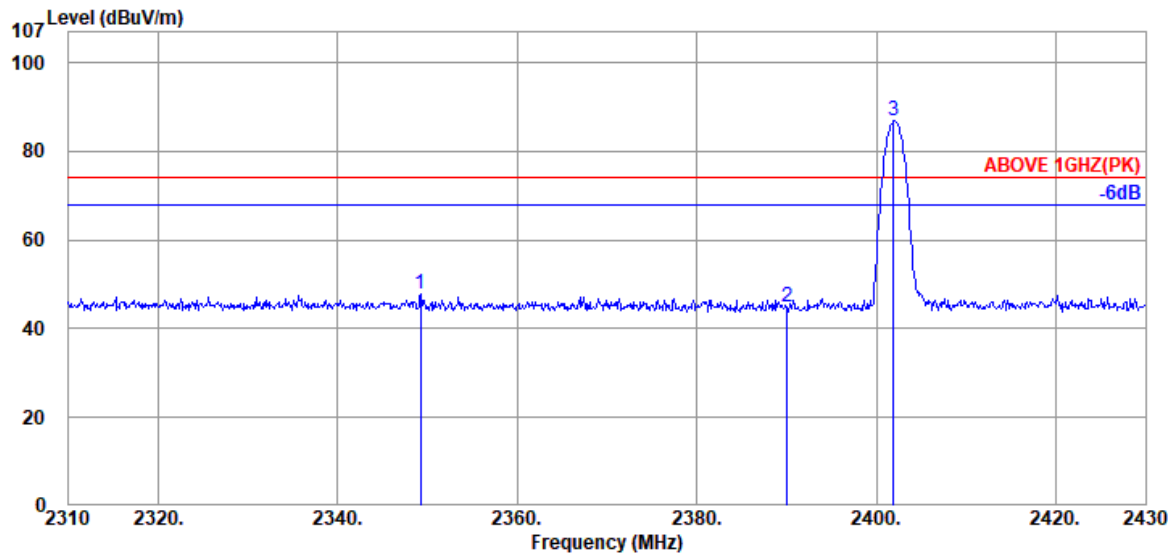

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.240	32.00	8.48	7.20	47.68	74.00	26.32	Peak
2390.040	32.00	8.52	4.47	44.99	74.00	29.01	Peak
@ 2401.920	32.03	8.52	46.28	86.83	---	---	Peak

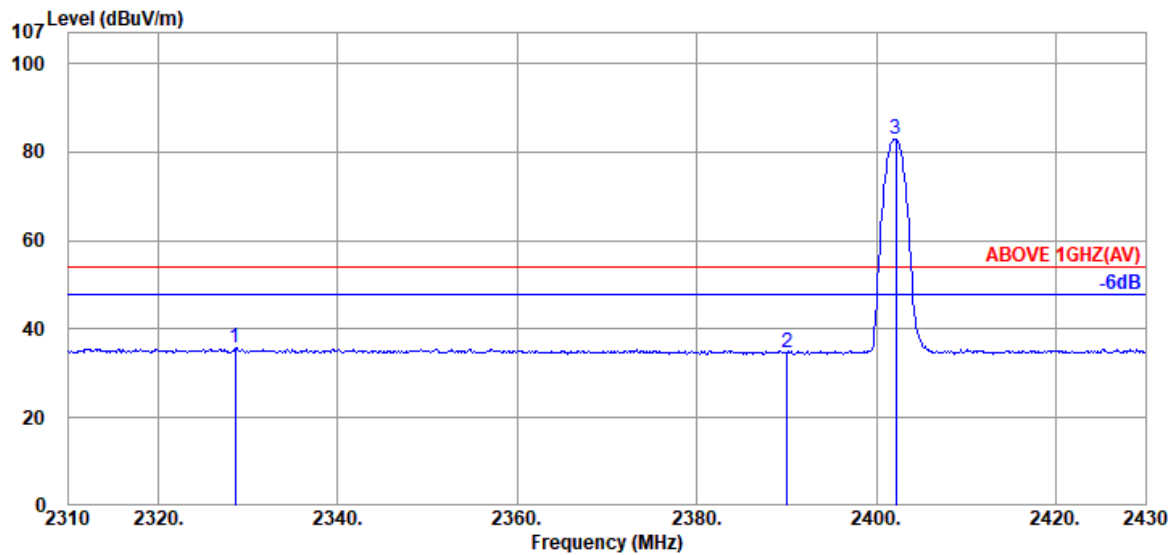


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.600	32.00	8.47	-4.72	35.75	54.00	18.25	Average
2390.040	32.00	8.52	-5.74	34.78	54.00	19.22	Average
@ 2402.160	32.03	8.52	42.52	83.07	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

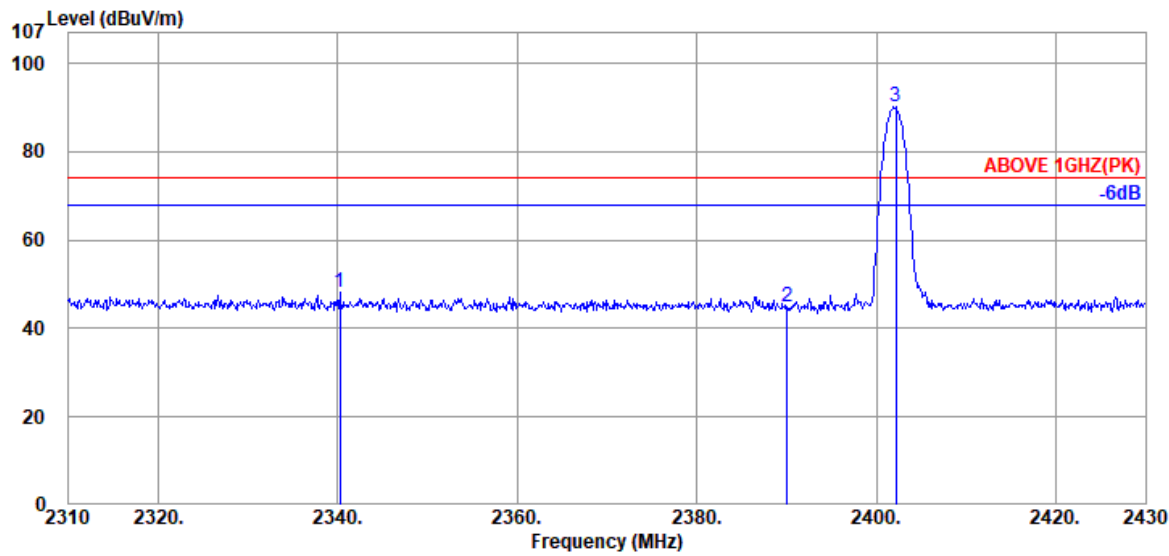

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.240	32.00	8.48	7.67	48.15	74.00	25.85	Peak
2390.040	32.00	8.52	4.29	44.81	74.00	29.19	Peak
@ 2402.160	32.03	8.52	49.50	90.05	---	---	Peak

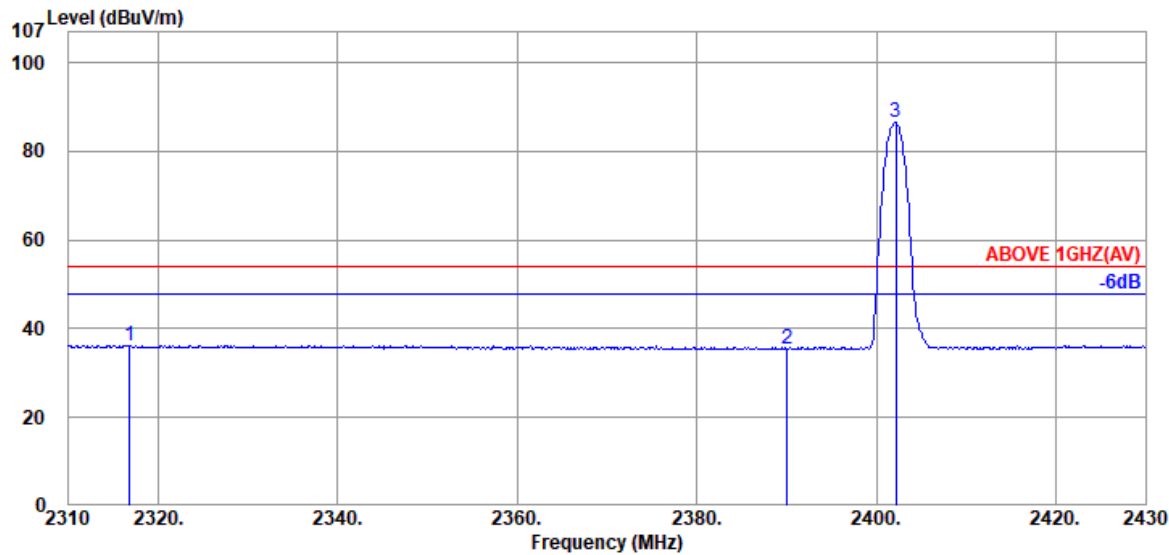


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2316.840	32.00	8.46	-4.18	36.28	54.00	17.72	Average
2390.040	32.00	8.52	-4.98	35.54	54.00	18.46	Average
@ 2402.160	32.03	8.52	45.83	86.38	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

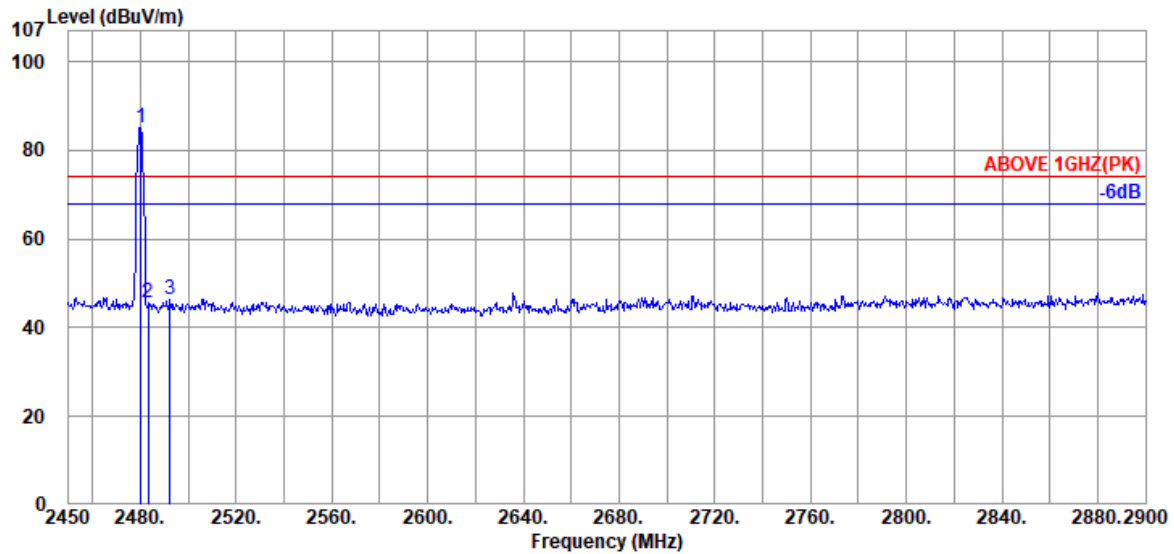

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	44.08	85.24	---	---	Peak
	2483.300	32.57	8.58	4.37	45.52	74.00	28.48	Peak
	2492.300	32.53	8.59	5.19	46.31	74.00	27.69	Peak

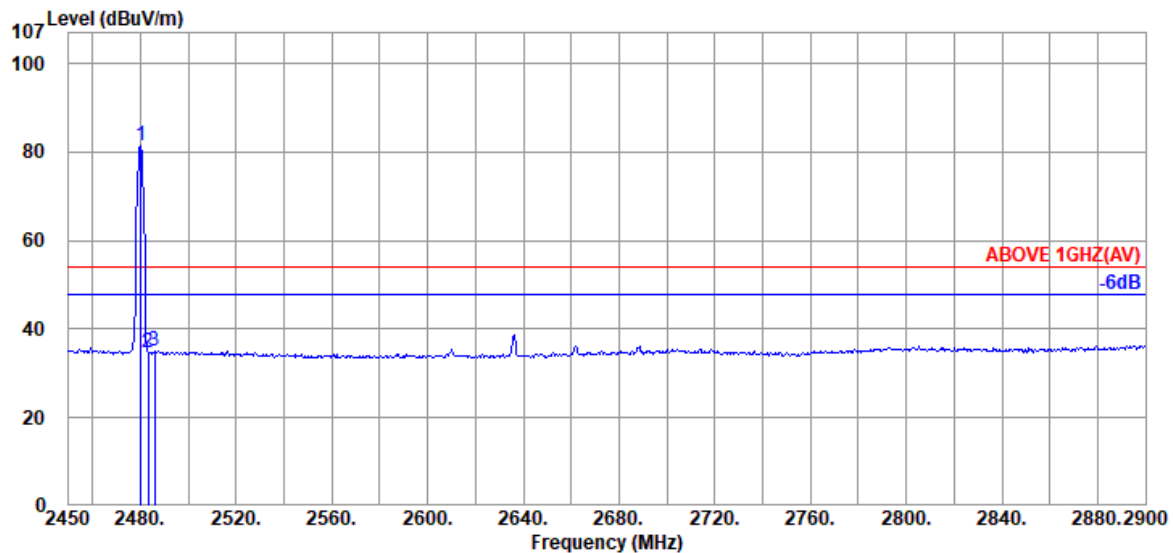


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	40.16	81.32	---	---	Average
	2483.300	32.57	8.58	-6.51	34.64	54.00	19.36	Average
	2486.000	32.56	8.58	-6.11	35.03	54.00	18.97	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

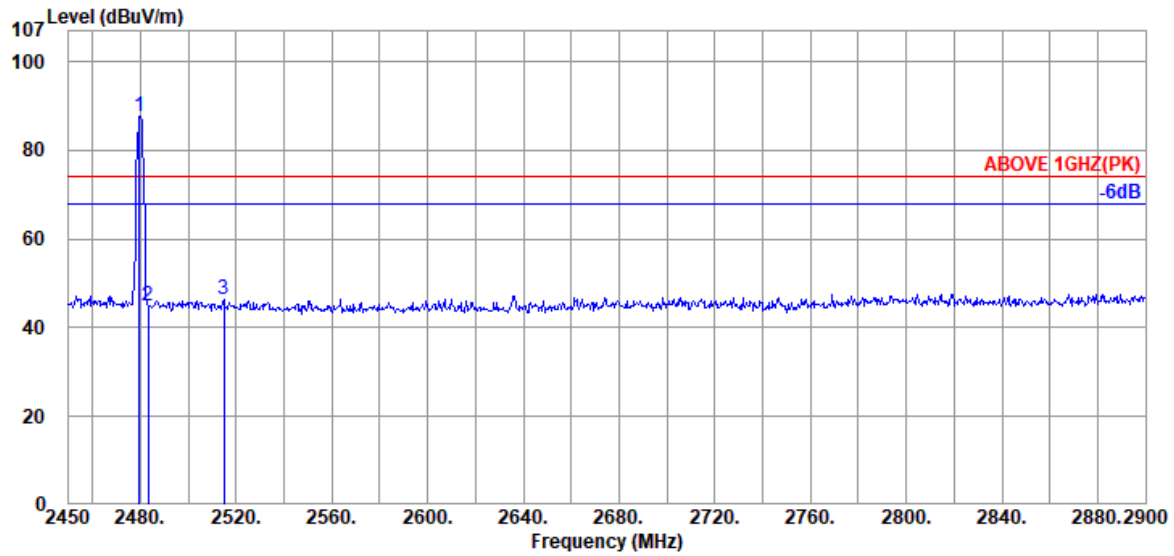

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.700	32.58	8.58	46.50	87.66	---	---	Peak
	2483.300	32.57	8.58	3.91	45.06	74.00	28.94	Peak
	2514.800	32.32	8.59	5.63	46.54	74.00	27.46	Peak

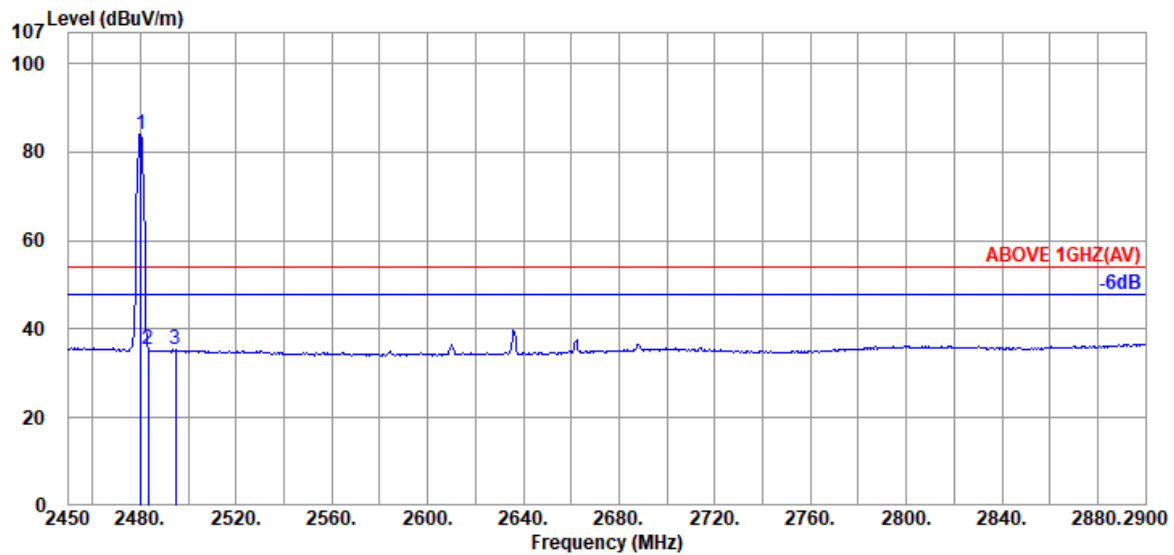

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	42.94	84.10	---	---	Average
	2483.300	32.57	8.58	-5.88	35.27	54.00	18.73	Average
	2494.550	32.52	8.59	-5.73	35.38	54.00	18.62	Average

備註：“@”為主波，在此章節是不予以判定。

2. 20dB 頻寬之量測


測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 3.7V (透過內建鋰電池供電)		

2.1. 20dB 頻寬

模式	測試頻率 (MHz)	20dB 頻寬 (MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	0.9198	0.613
	2441	0.9209	0.614
	2480	0.9206	0.614

模式	測試頻率 (MHz)	20dB 頻寬 (MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
8-DPSK	2402	1.263	0.842
	2441	1.266	0.844
	2480	1.267	0.845

2.2. 20dB 頻寬之量測圖

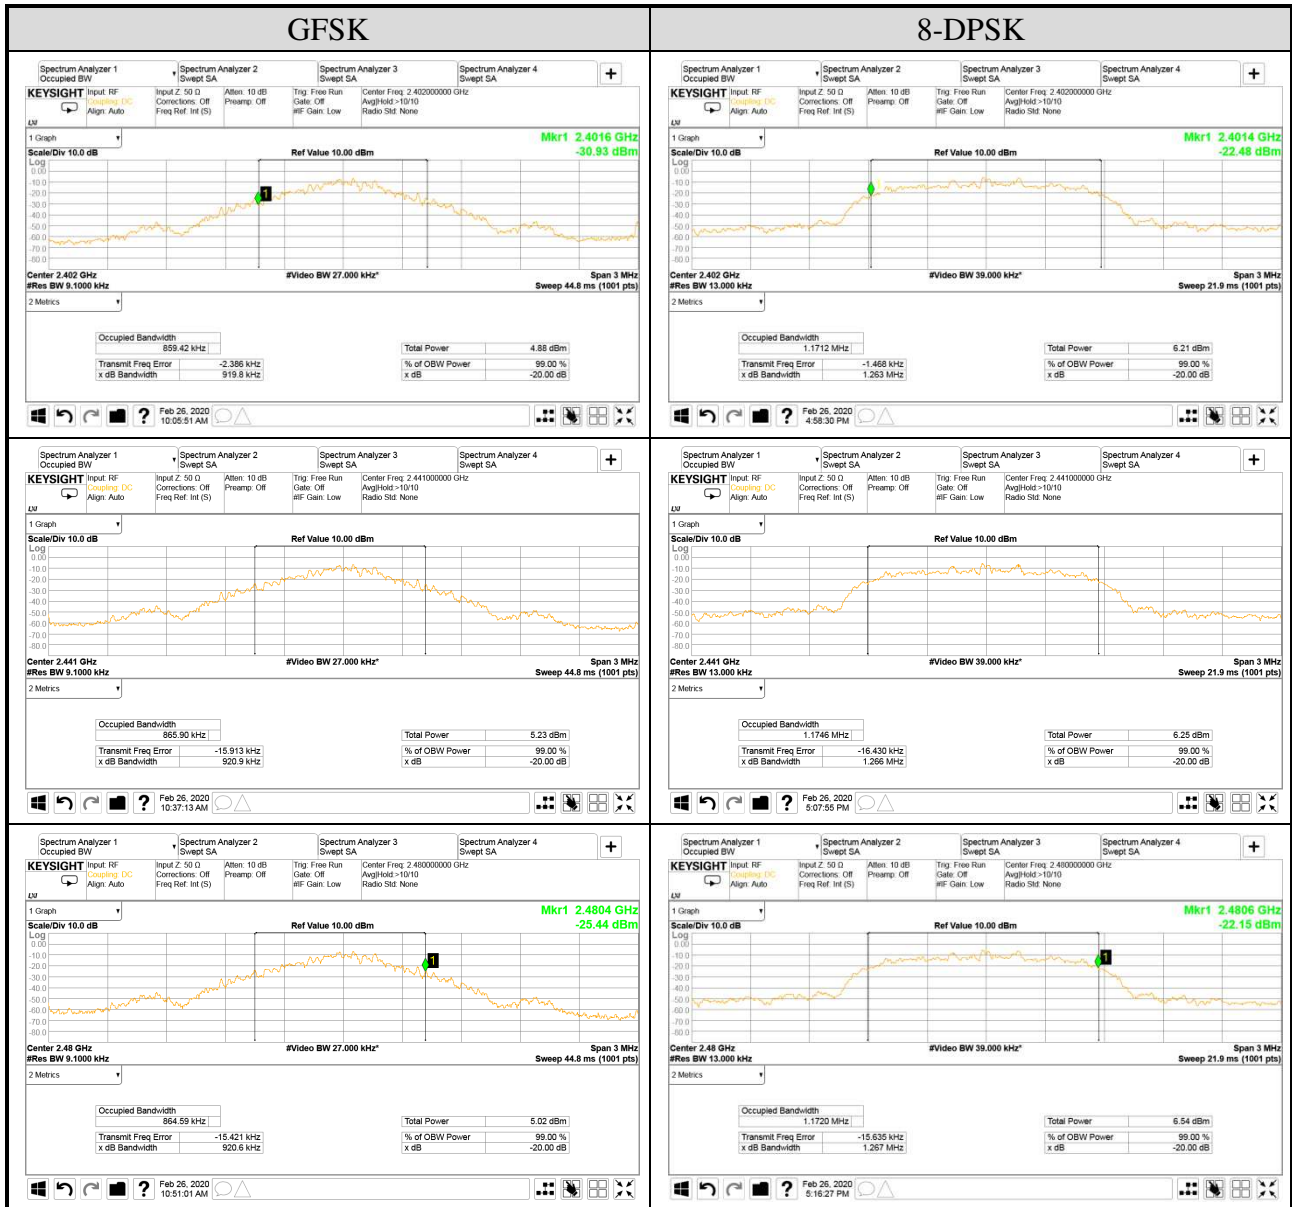

3. 載波頻率間隔之量測


測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		


3.1. 載波頻率間隔

模式 (Mode)	測試頻率 (MHz)	頻道間隔(MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	1.002	>0.614
	2441 (左邊鄰近頻道)	0.993	
	2441 (右邊鄰近頻道)	1.053	
	2480	0.999	

模式 (Mode)	測試頻率 (MHz)	頻道間隔(MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
8-DPSK	2402	0.999	>0.845
	2441 (左邊鄰近頻道)	0.978	
	2441 (右邊鄰近頻道)	1.023	
	2480	1.002	


3.2. 載波頻率間隔之量測圖

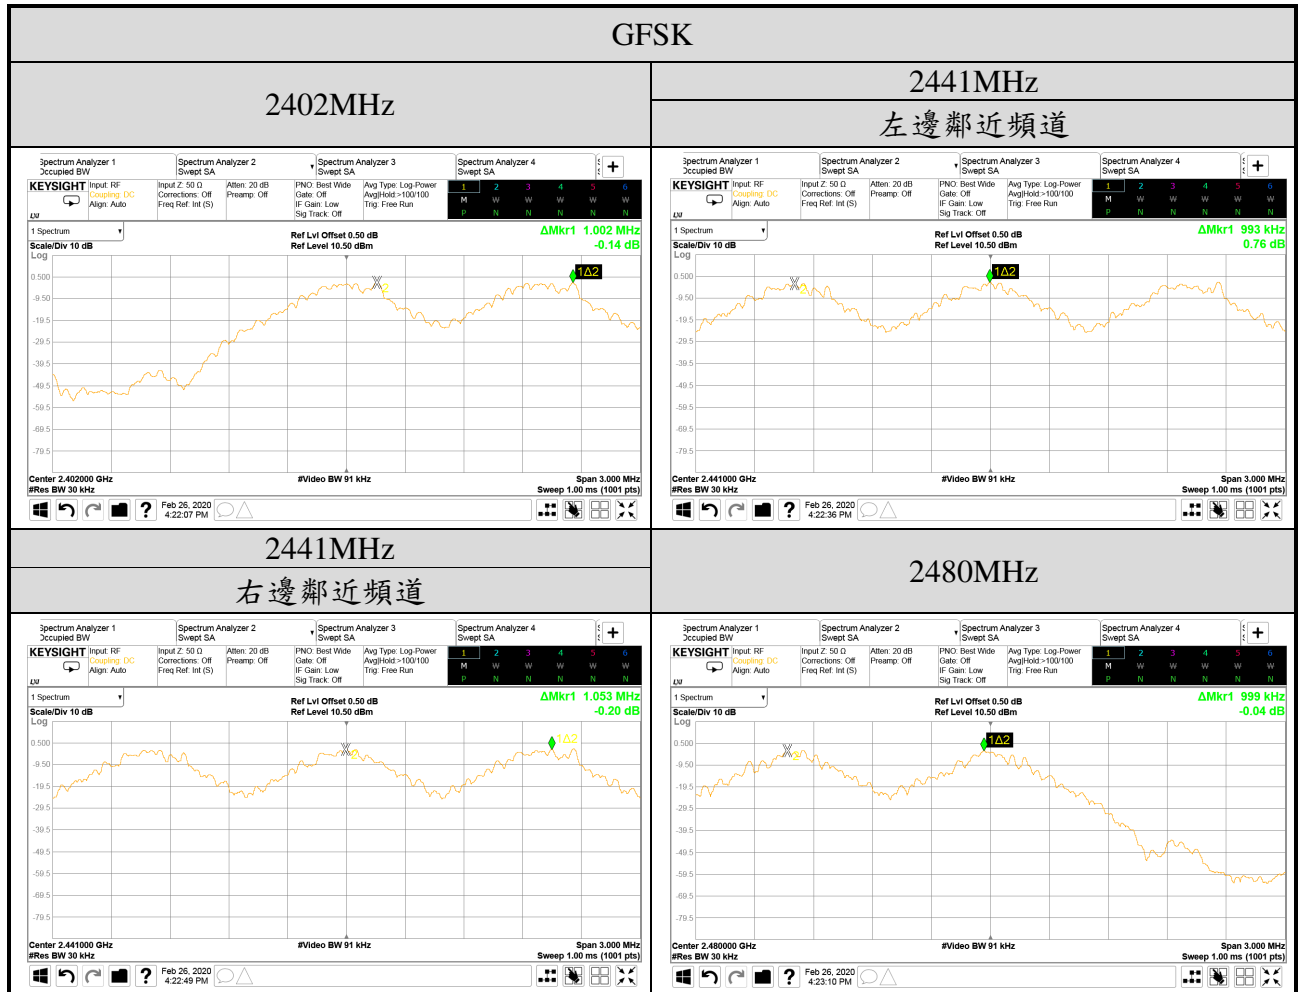

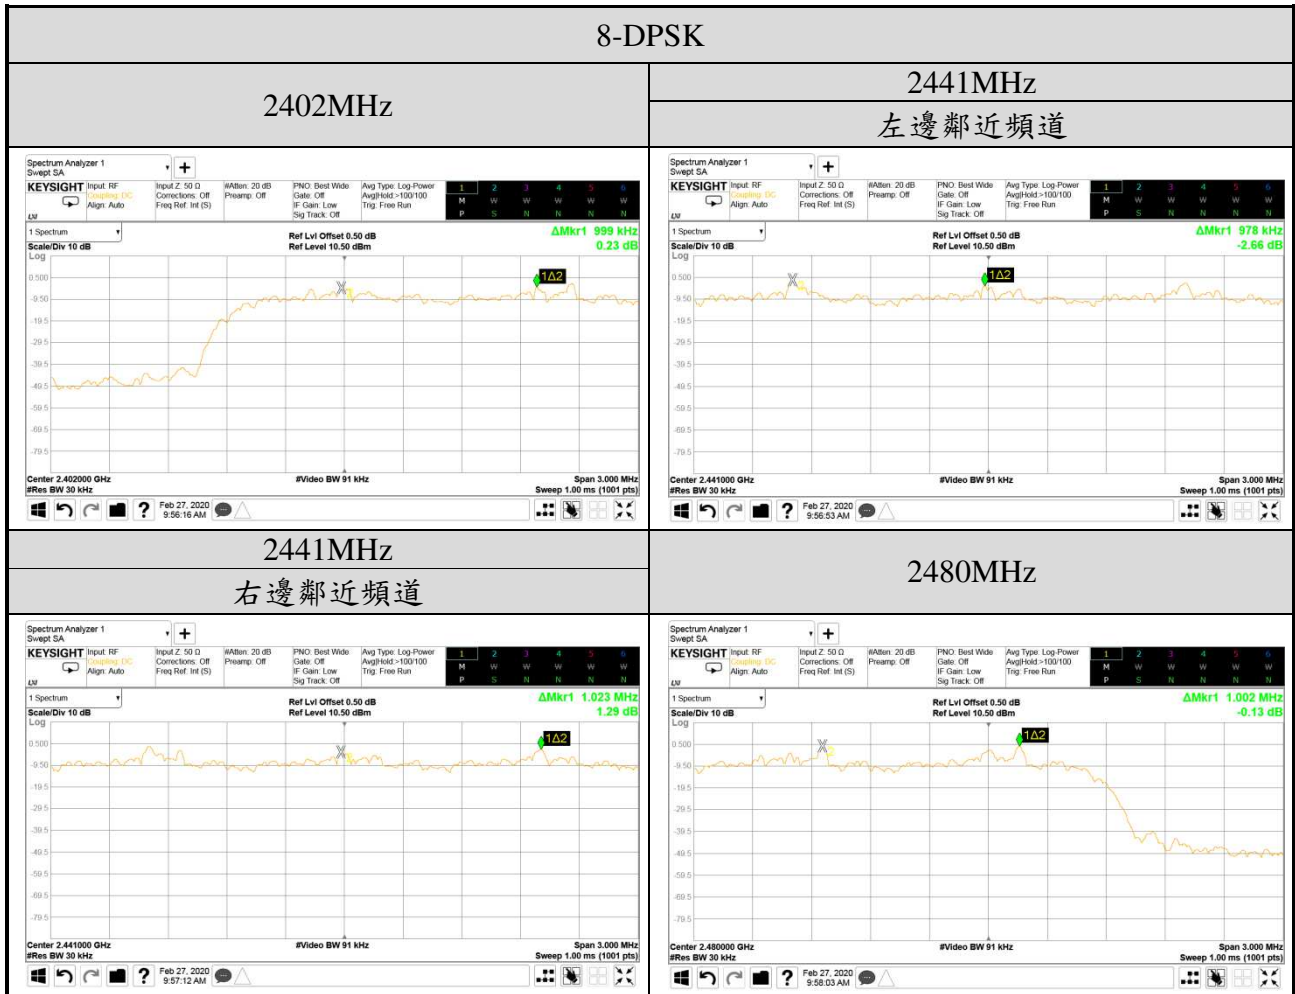

4. 跳頻頻率數目之量測

測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		

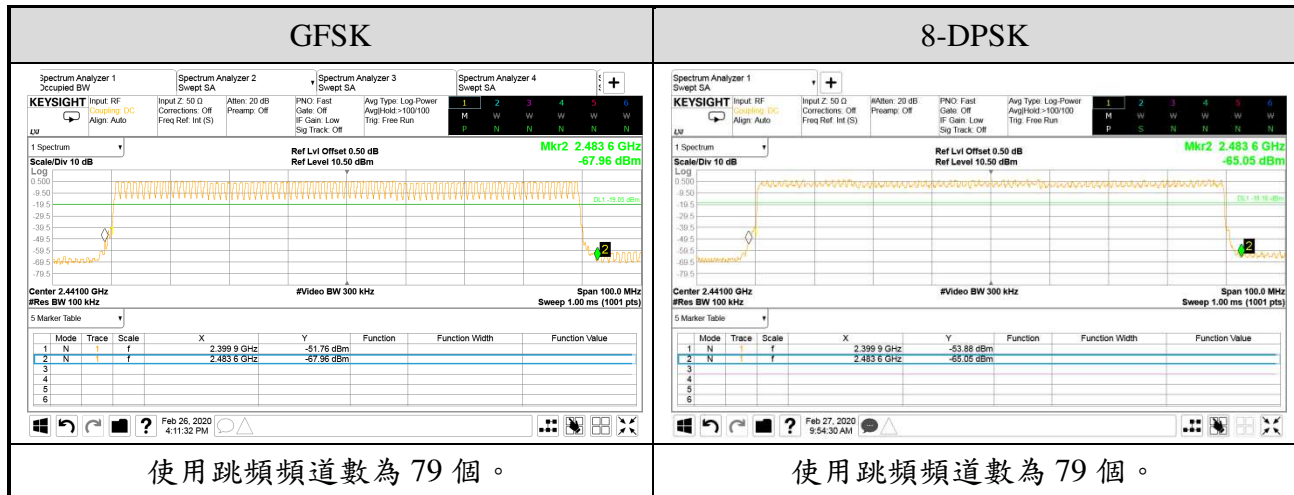

5. 佔用時間(停留時間)之量測

測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		

5.1. 佔用時間(停留時間)

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2402	DH1	10	0.380	120.080	<400
		DH3	5	1.630	257.540	<400
		DH5	3	2.880	273.024	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.380 \text{ ms} = 120.080 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.630 \text{ ms} = 257.540 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.880 \text{ ms} = 273.024 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

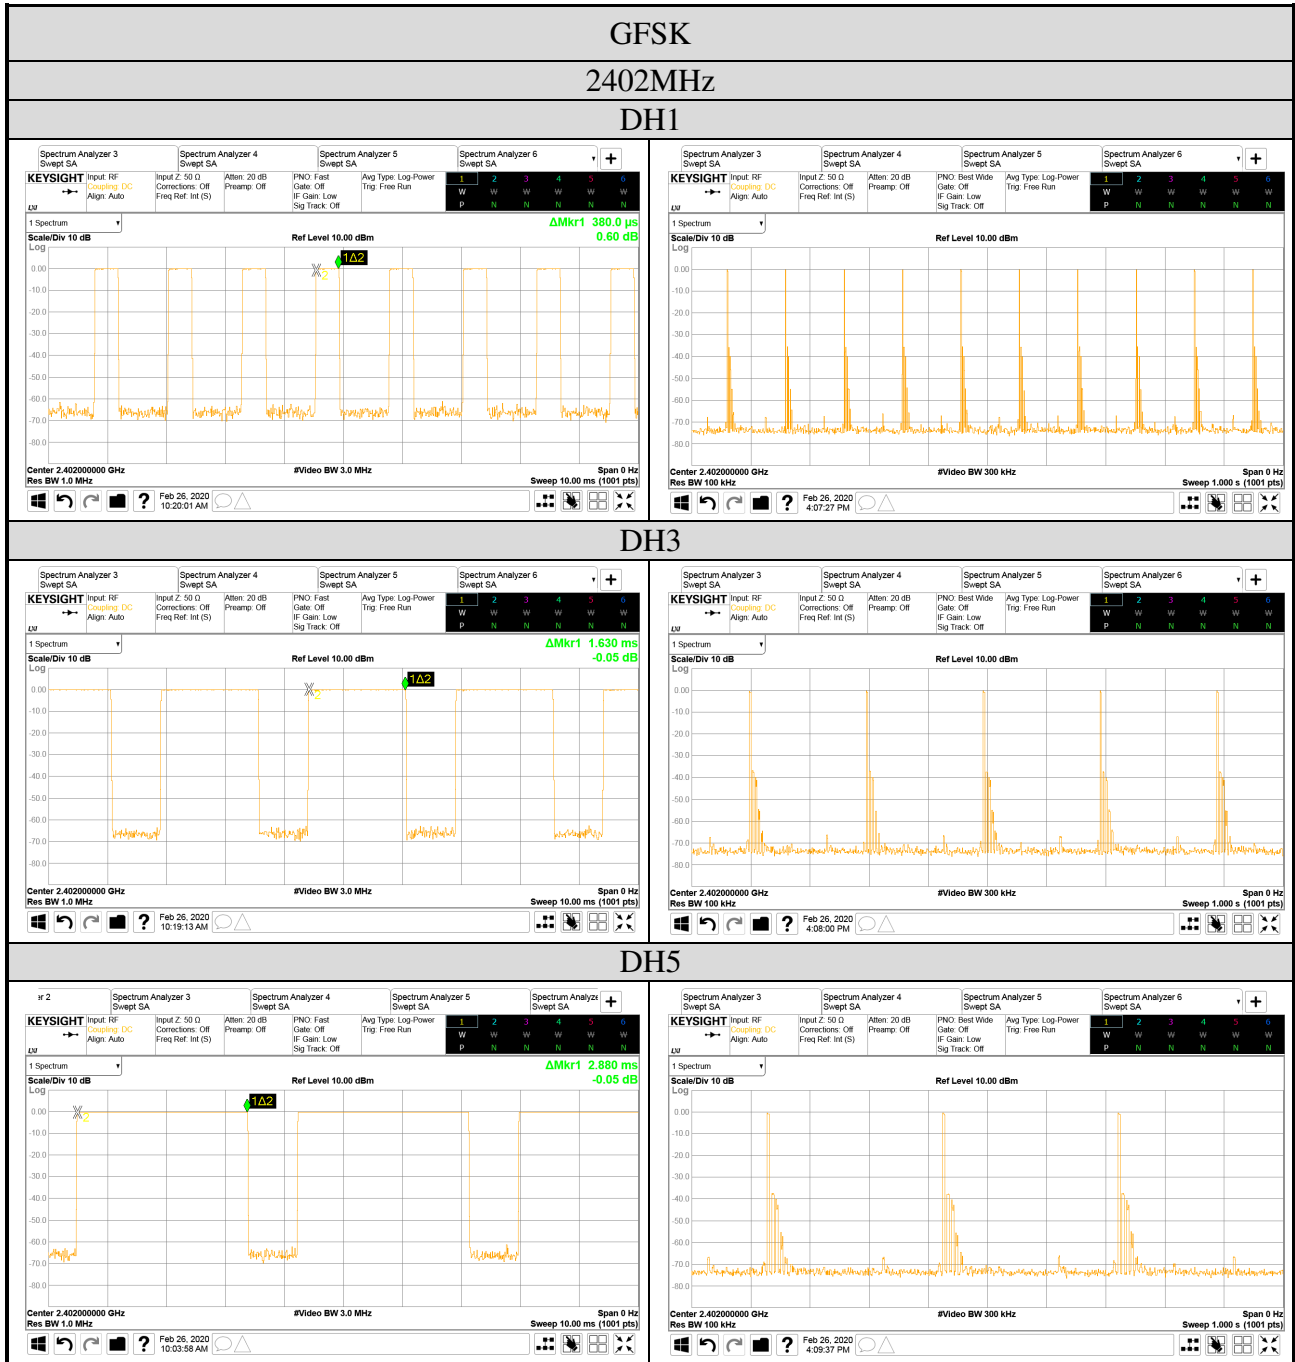

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2441	DH1	10	0.390	123.240	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.880	273.024	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.880 \text{ ms} = 273.024 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

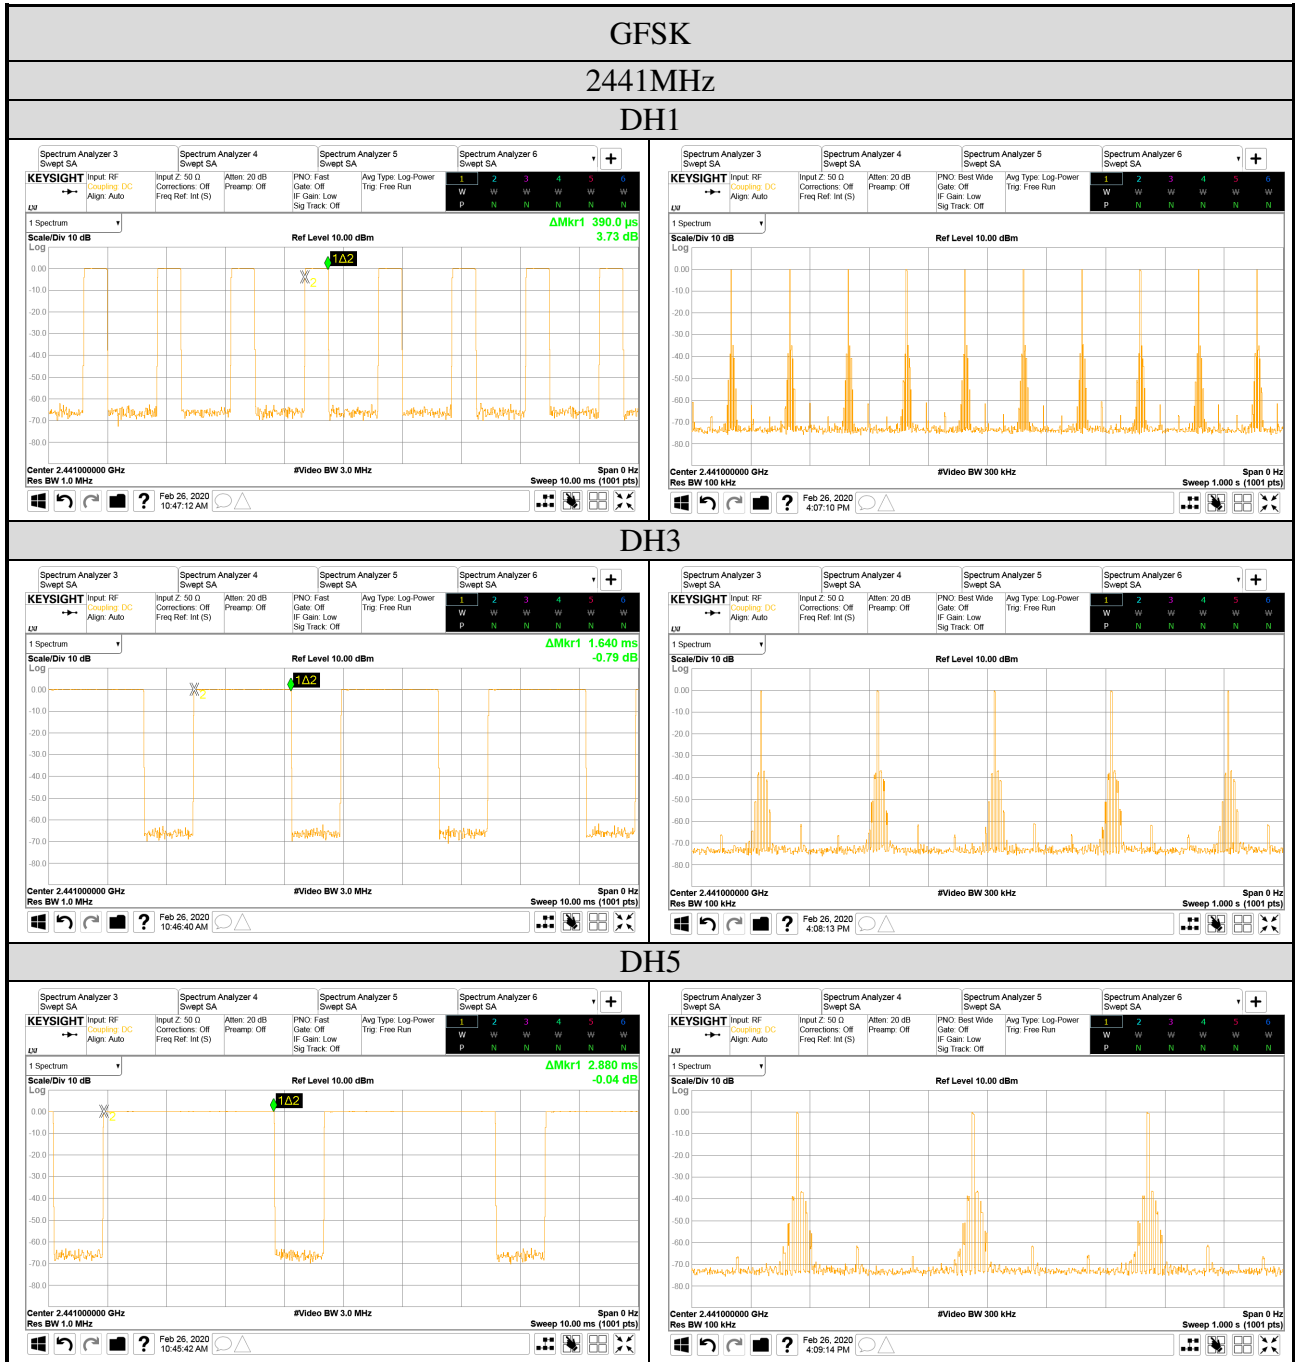

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2480	DH1	10	0.380	120.080	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.890	273.972	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.380 \text{ ms} = 120.080 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

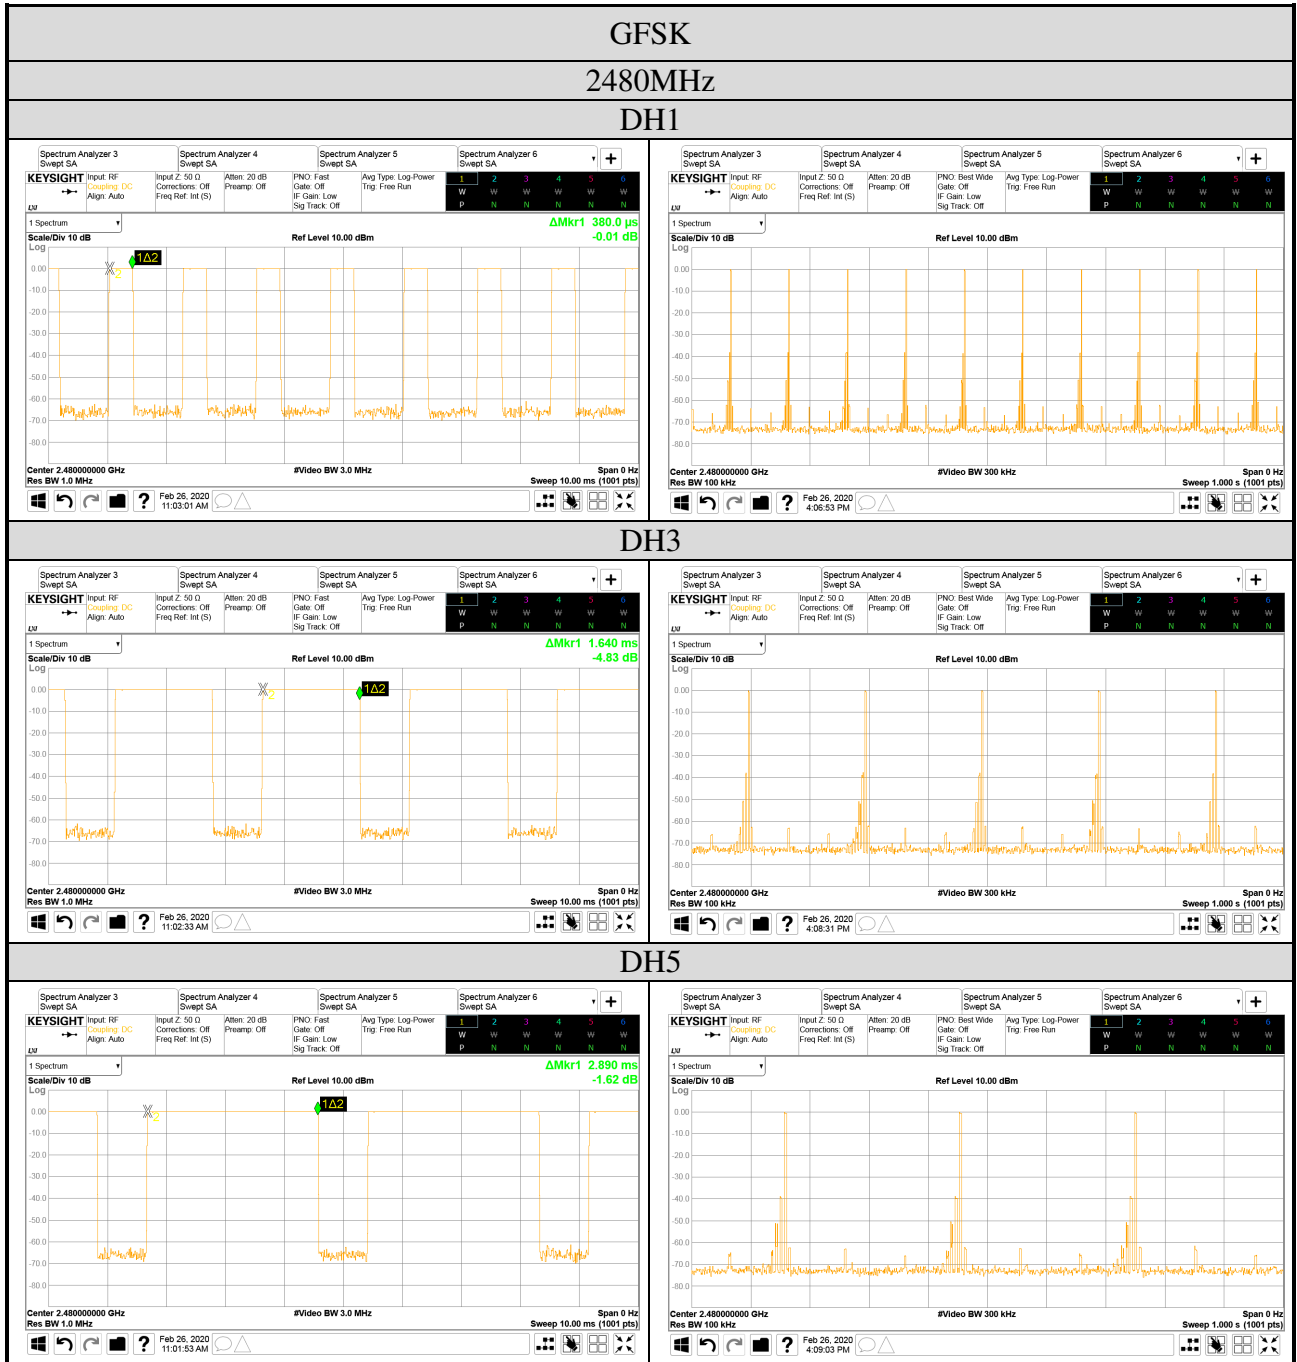

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2402	3DH1	10	0.390	123.240	<400
		3DH3	5	1.640	259.120	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

● 佔用時間(停留時間)之量測圖

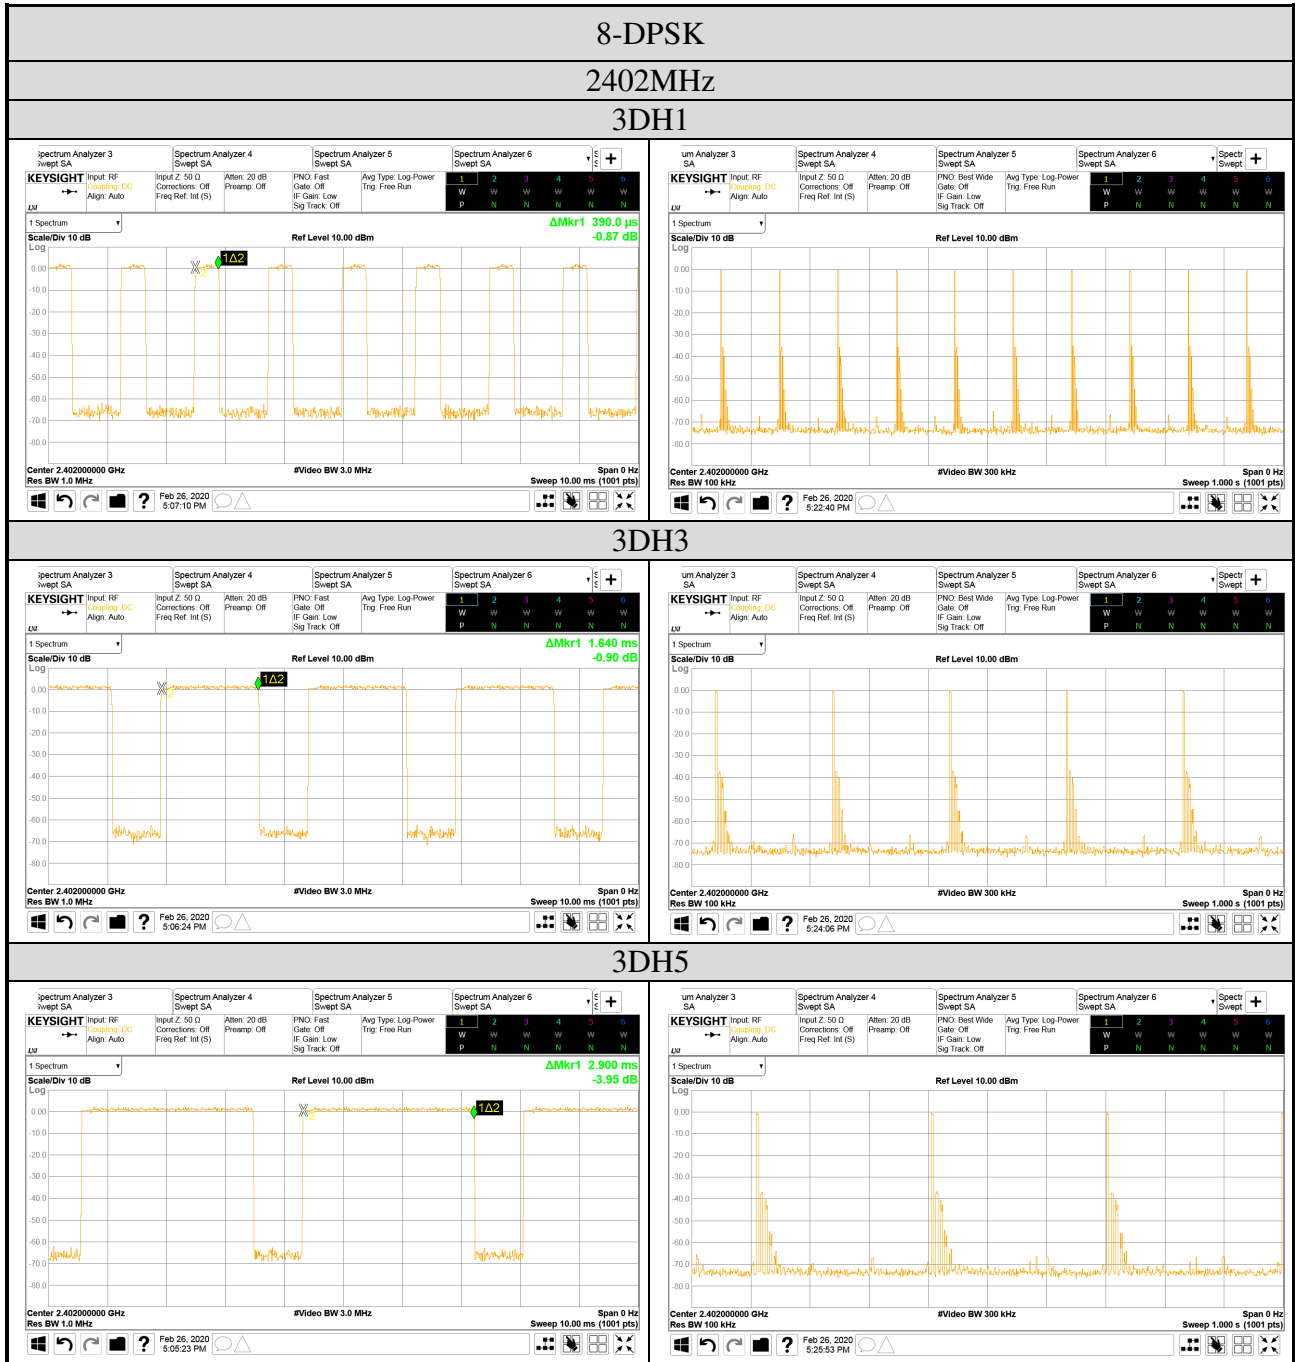

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2441	3DH1	10	0.400	126.400	<400
		3DH3	5	1.650	260.700	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.400 \text{ ms} = 126.400 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.650 \text{ ms} = 260.700 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2480	3DH1	10	0.400	126.400	<400
		3DH3	5	1.640	259.120	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.400 \text{ ms} = 126.400 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

● 佔用時間(停留時間)之量測圖

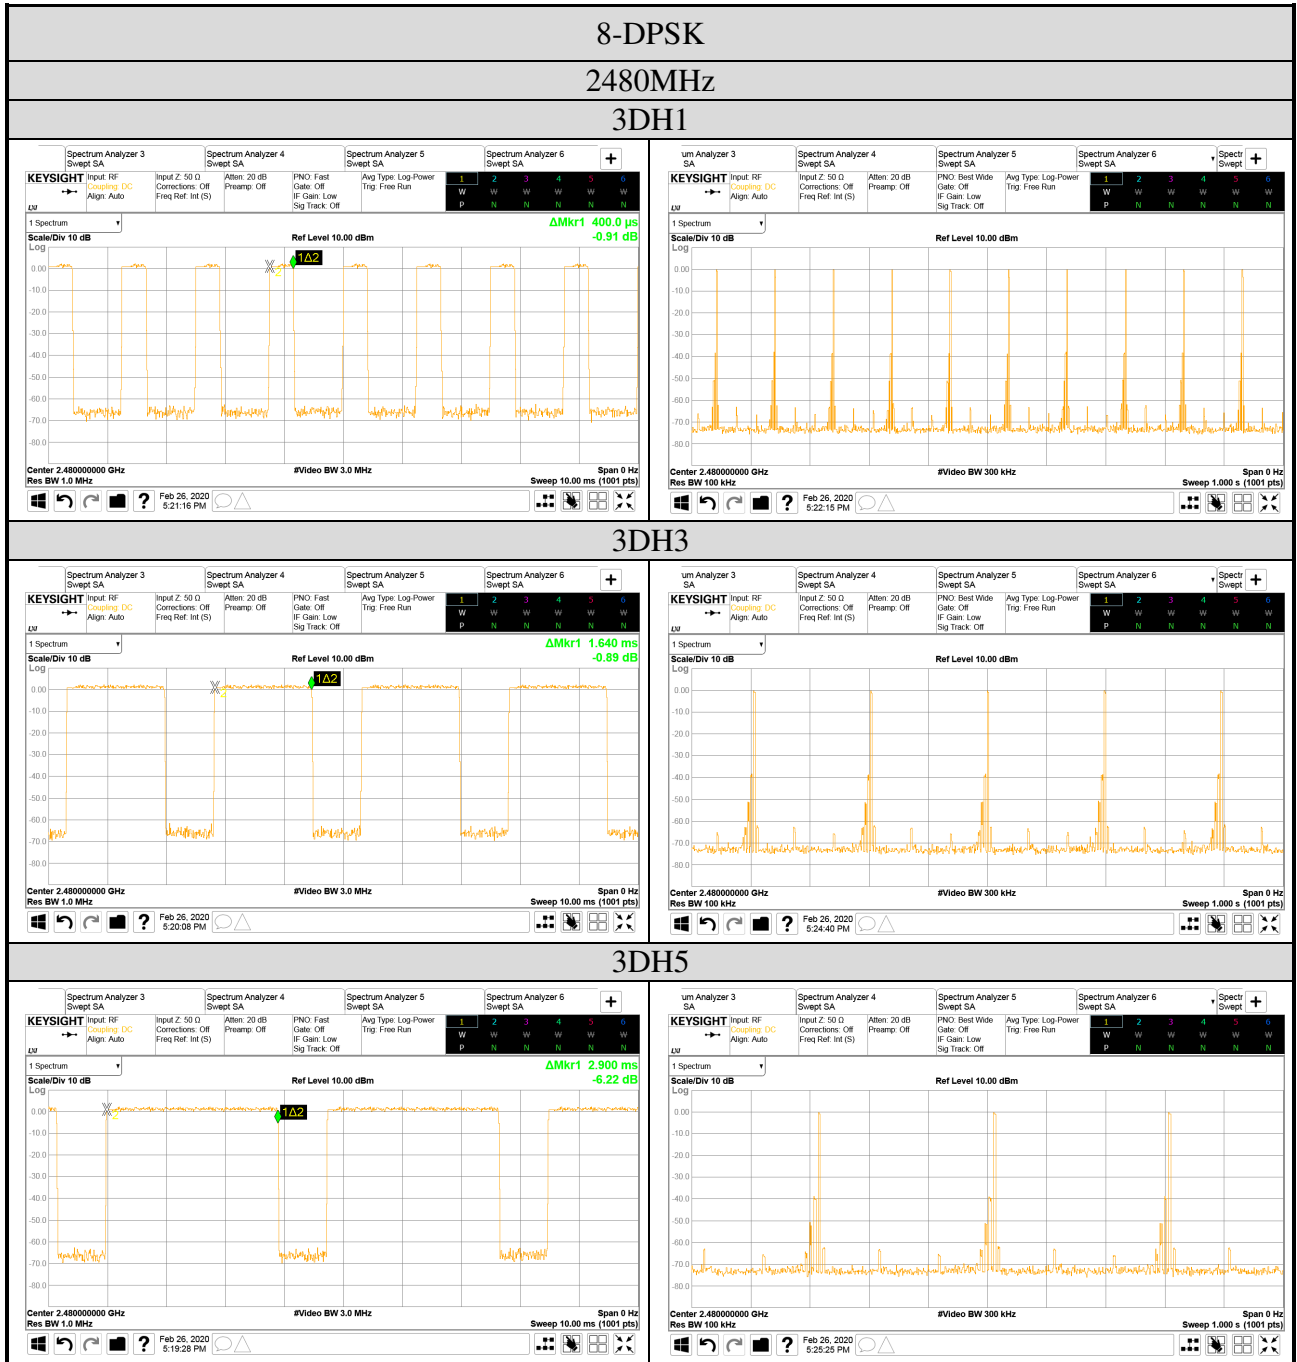

6. 峰值輸出功率之量測


測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		

6.1. .峰值輸出功率

模式	測試頻率 (MHz)	峰值輸出功率(dBm)
GFSK	2402	0.93
	2441	1.00
	2480	0.79



模式	測試頻率 (MHz)	峰值輸出功率(dBm)
8-DPSK	2402	3.46
	2441	3.55
	2480	3.47

6.2. 峰值輸出功率之量測圖

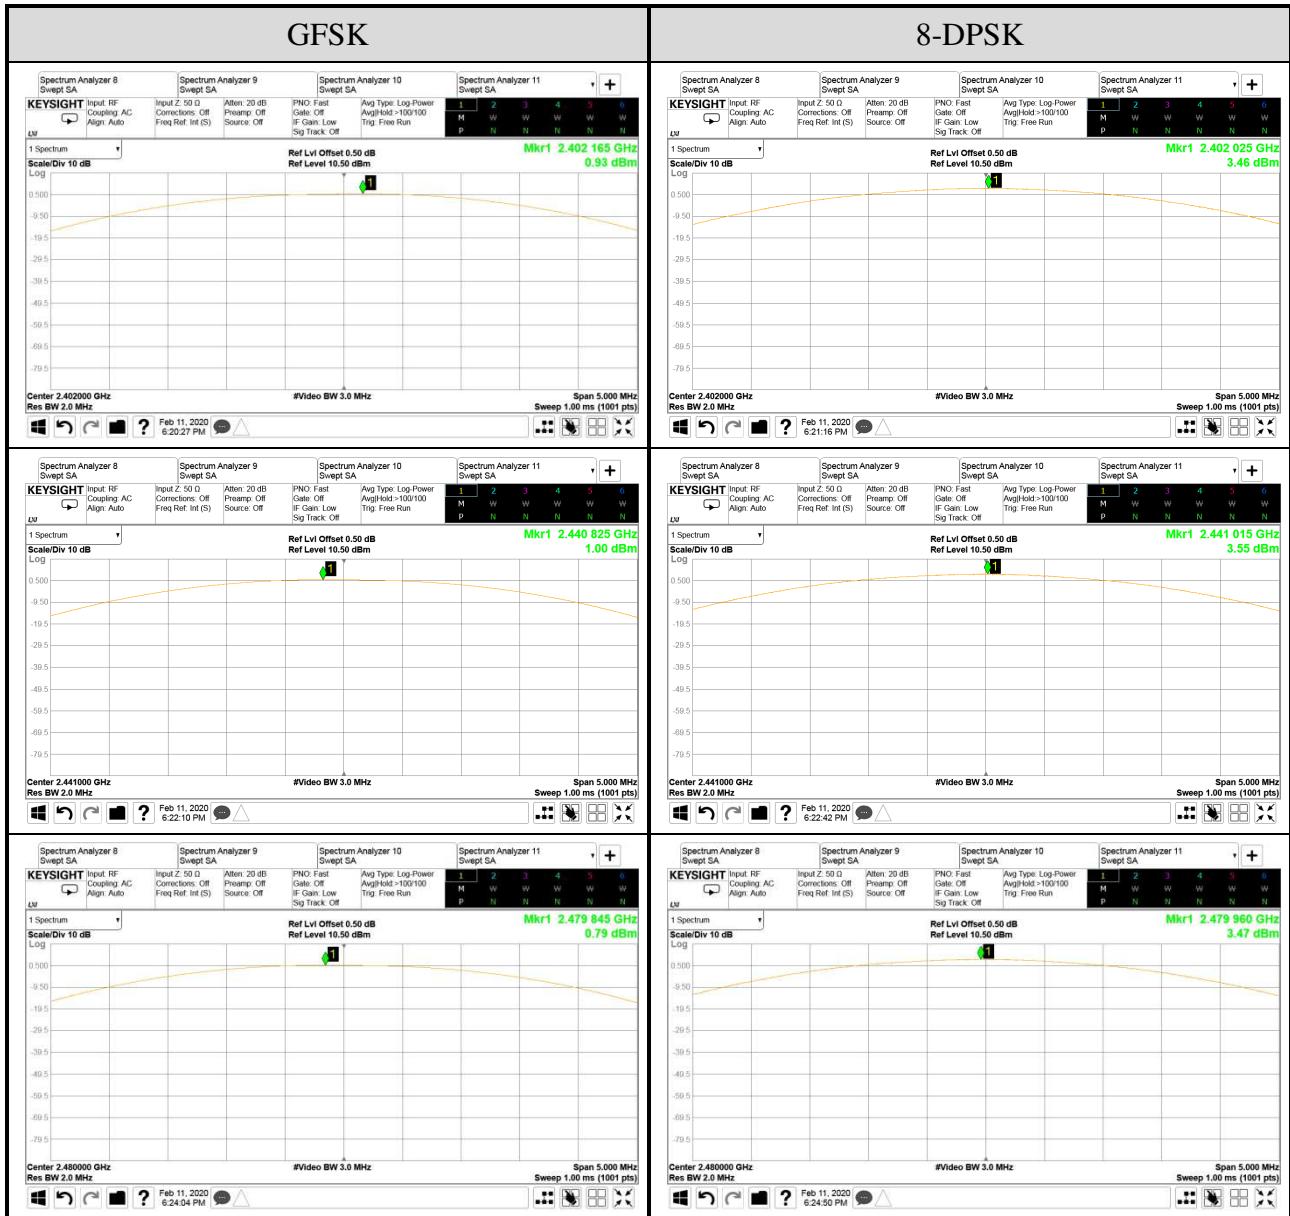

7. 頻帶邊緣之 RF 傳導發射之量測

測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		

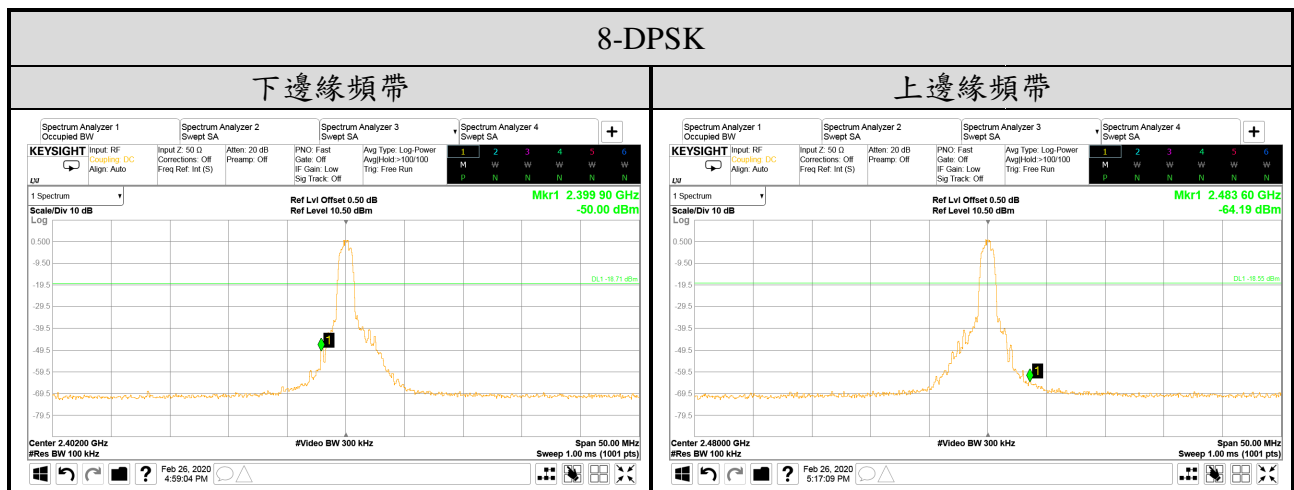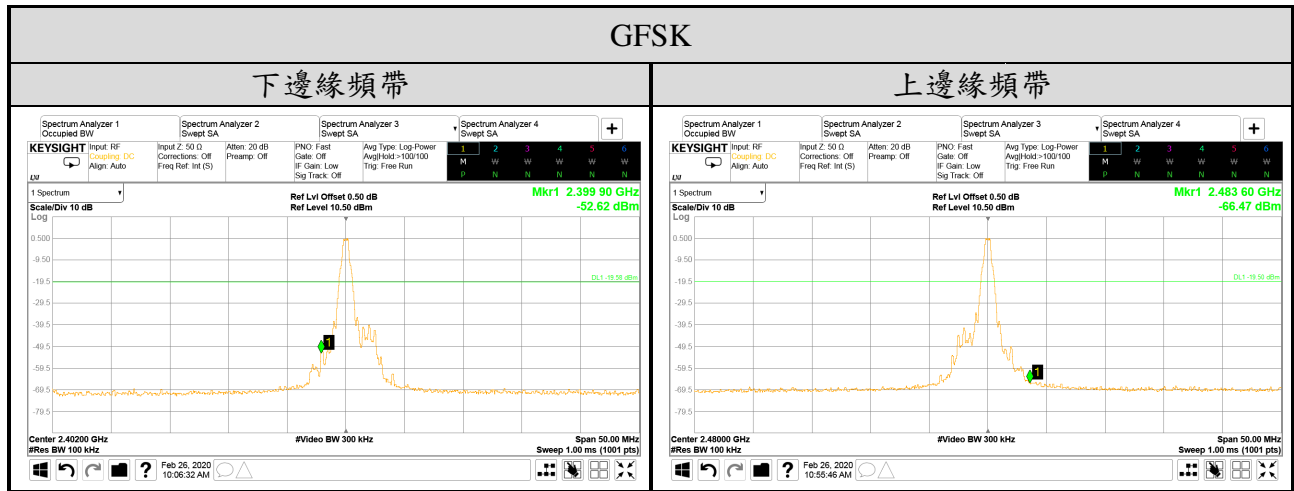

8. 混附發射之 RF 傳導發射之量測

測試日期	2020/02/11	環境溫/濕度	22°C/56%
電纜損失	0.5dB	測試人員	Sean Wang
測試電壓	DC 5V (透過 USB 由筆記型電腦供電)		





